



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Certification

Applicant Name:
LG Electronics USA
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
August 1 - 3, 2007
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0707240761.BEJ

FCC ID:	BEJLTGEN80L
APPLICANT:	LG ELECTRONICS USA


Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§2; §22(H), §24(E)
EUT Type:	Cellular/PCS AMPS/CDMA Transceiver with Bluetooth
Model(s):	Gen8.0L
Tx Frequency Range:	824.04 - 848.97MHz (AMPS) / 824.70 - 848.31MHz (Cell. CDMA) 1851.25 - 1908.75MHz (PCS CDMA)
Max. RF Output Power:	0.536 W ERP AMPS (27.29 dBm) / 0.431 W ERP Cell. CDMA (26.34 dBm) 0.296 W EIRP PCS CDMA (24.72 dBm)
Emission Designator(s):	40K0F8W, 40K0F1D (AMPS) / 1M27F9W (CDMA) / 1M26F9W (PCS)
Test Device Serial No.:	identical prototype [S/N: FCC #2, FCC #3]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 22 and EIRP for Part 24.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President



FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth	Page 1 of 50	

TABLE OF CONTENTS


FCC PART 22 & 24 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 MEASUREMENT PROCEDURE	4
1.2 SCOPE	4
1.3 TESTING FACILITY	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.3 LABELING REQUIREMENTS	5
3.0 DESCRIPTION OF TESTS	6
3.1 TRANSMITTER AUDIO FREQUENCY RESPONSE	6
3.2 AUDIO LOW PASS FILTER FREQUENCY RESPONSE	6
3.3 MODULATION LIMITING	6
3.4 SIDEBAND POWER ATTENUATION LIMITS (AMPS)	7
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	7
3.6 OCCUPIED BANDWIDTH EMISSION LIMITS	7
3.7 CELLULAR - BASE FREQUENCY BLOCKS	8
3.8 CELLULAR - MOBILE FREQUENCY BLOCKS	8
3.9 PCS - BASE FREQUENCY BLOCKS	8
3.10 PCS - MOBILE FREQUENCY BLOCKS	8
3.11 RADIATED SPURIOUS AND HARMONIC EMISSIONS	9
3.12 FREQUENCY STABILITY / TEMPERATURE VARIATION	9
4.0 TEST EQUIPMENT CALIBRATION DATA	9
5.0 SAMPLE CALCULATIONS	11
6.0 TEST RESULTS	12
6.1 SUMMARY	12
6.2 CONDUCTED OUTPUT POWER	13
6.3 EFFECTIVE RADIATED POWER OUTPUT DATA	14
6.4 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA	15
6.5 AMPS RADIATED MEASUREMENTS	16
6.6 CELLULAR CDMA RADIATED MEASUREMENTS	19
6.7 PCS CDMA RADIATED MEASUREMENTS	22
6.8 FREQUENCY STABILITY (AMPS)	25
6.9 FREQUENCY STABILITY (CELLULAR CDMA)	27
6.10 FREQUENCY STABILITY (PCS CDMA)	29
7.0 PLOTS OF EMISSIONS	31
8.0 CONCLUSION	50

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 2 of 50



MEASUREMENT REPORT

FCC Part 22 & 24



§2.1033 General Information

APPLICANT: LG Electronics USA
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E)
MODEL NAME: Gen8.0L
FCC ID: BEJLTGEN80L
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
EMISSION DESIGNATOR(S): 40K0F8W, 40K0F1D (AMPS) / 1M27F9W (CDMA) / 1M26F9W (PCS)
MODE: AMPS / CDMA
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm)
Test Device Serial No.: FCC #2, FCC #3 ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: August 1 - 3, 2007
TEST REPORT S/N: 0707240761.BEJ

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025:2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 3 of 50

1.0 INTRODUCTION

1.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 1-1). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

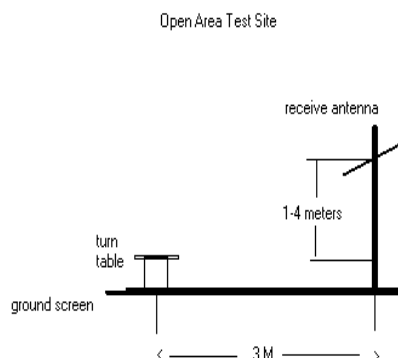


Figure 1-1. Diagram of 3-meter outdoor test range

Deviation from Measurement Procedure.....None

1.2 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 Testing Facility

These measurement tests were conducted at PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

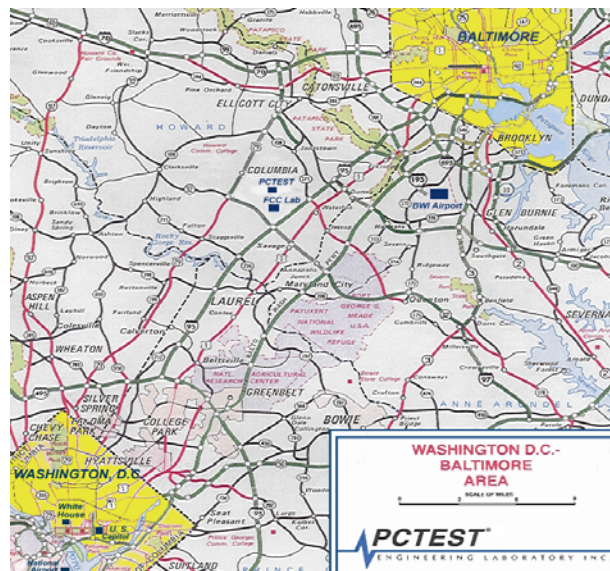


Figure 1-2. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 4 of 50

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LGE Cellular/PCS AMPS/CDMA Transceiver with Bluetooth FCC ID: BEJLTGEN80L**. The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	Description
LGE / Model: Gen8.0L	BEJLTGEN80L	Cellular/PCS AMPS/CDMA Transceiver with Bluetooth
AC Delco	N/A	Antenna

Table 2-1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.3 Labeling Requirements

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 5 of 50

3.0 DESCRIPTION OF TESTS

3.1 Transmitter Audio Frequency Response

§2.1047, TIA/EIA-553-A (2.1.3.1.4)

The frequency response of the audio modulating circuit over the frequency range 100 – 5000 Hz is measured. The audio signal generator is connected to the audio input circuit/microphone of the EUT. The audio signal input is adjusted to obtain 50% modulation at 1kHz and this point is taken as the 0dB reference. With the input held constant and below the limit at all frequencies, the audio signal generator is varied from 100 to 50 kHz.

3.2 Audio Low Pass Filter Frequency Response

§2.1047, TIA/EIA-553-A (2.1.3.1.4); RSS-129 (6.2)

The response in dB relative to 1kHz is measured using the HP8901 a Modulation Analyzer. For the frequency response of the audio low-pass filter, the audio input is connected at the input to the modulation limiter and the modulated stage. The audio output is connected at the output of the modulated stage. The corresponding plots are shown herein.

3.3 Modulation Limiting

§2.1047, TIA/EIA-553-A (2.1.3.1.3); RSS-129 (6.1)

The audio signal generator is connected to the audio input circuit/microphone of the EUT. The modulation response is measured for each of the three modulating frequencies (300Hz, 1000Hz, and 3000Hz), and the input voltage is varied from 30% modulation (± 3.6 kHz deviation) to at least 20dB higher than the saturation point. Measurements of modulation and the plots are attached herein. Measurements were performed for ST, SAT, and wide-band data modulations. The corresponding results are shown herein.

Note: ST, SAT, & Wide-Band data were internally generated by the EUT.

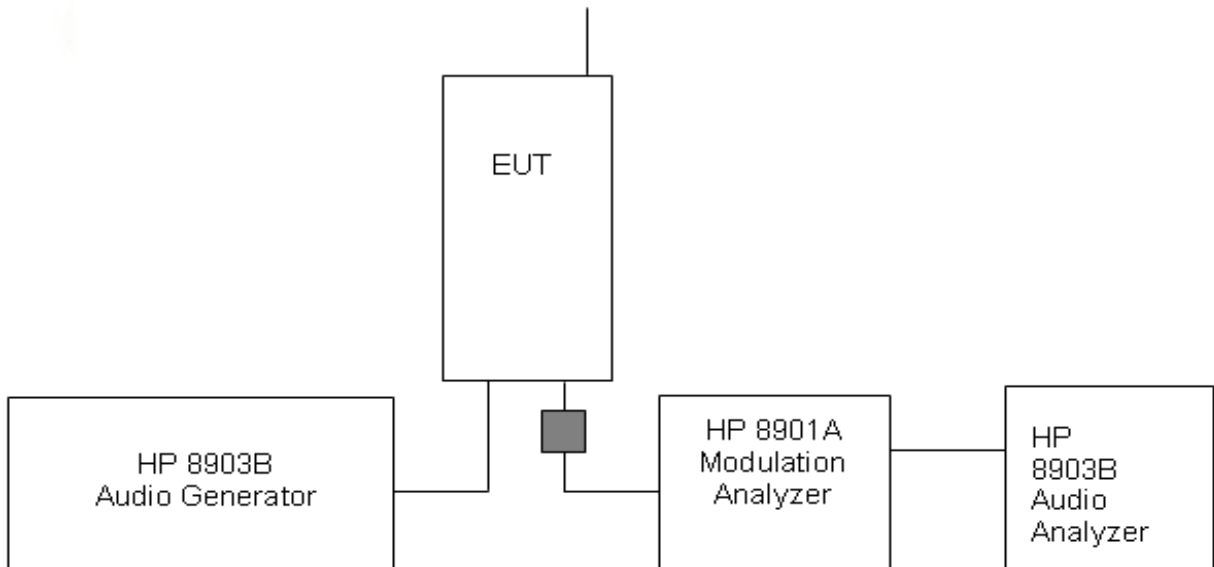


Figure 3-1. Transmitter Audio Frequency & Tone Modulation Test Setup

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 6 of 50

3.4 Sideband Power Attenuation Limits (AMPS)

§2.1047, TIA/EIA-553-A (2.1.4.1); RSS-129 (6.3.2)

The audio signal generator is adjusted to 1 kHz. The output level is set to ± 6 kHz deviation. With the level constant, the frequency is set to 2500 Hz. Then the audio signal level is increased by 16 dB. The occupied bandwidth data is obtained for the SAT (Supervisory Audio Tone), ST (Signaling Tone), WBD (Wideband data), and DTMF (Dual Tone Multi Frequencies). The results are shown on the attached graphs.

Specified Limits:

- On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- On any frequency removed from the assigned carrier frequency by more than the 45 kHz, up to and including 90 kHz, the sideband is at least 45 dB below the carrier.
- On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60dB below the carrier or $43 + \log_{10}(\text{mean power output in Watts})$ dB, whichever is the smaller attenuation.

3.5 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


3.6 Occupied Bandwidth Emission Limits

§2.1049, 22.917(a), 24.238(a)

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 7 of 50

3.7 Cellular - Base Frequency Blocks

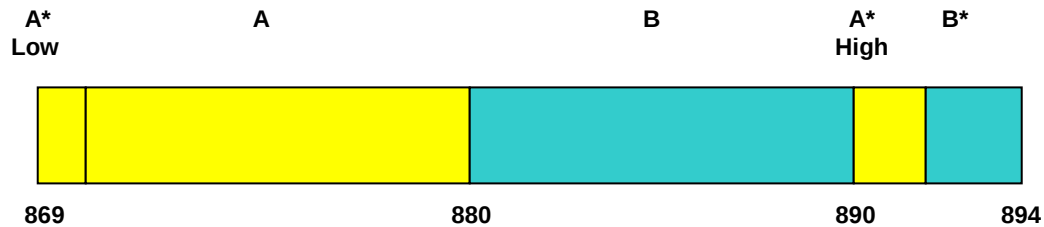


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.8 Cellular - Mobile Frequency Blocks

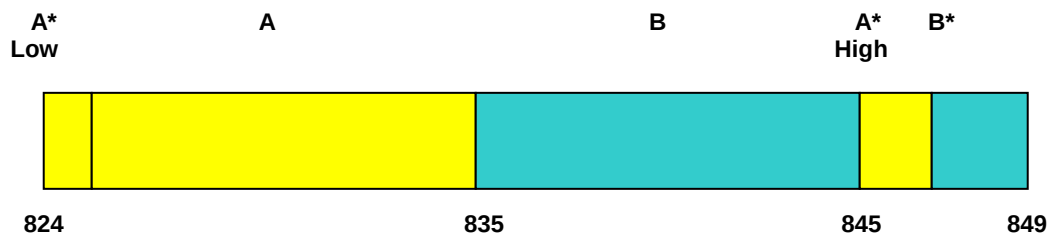


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.9 PCS - Base Frequency Blocks

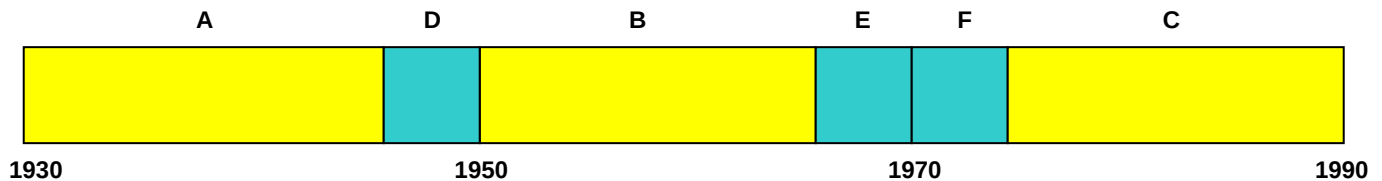

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)


BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

3.10 PCS - Mobile Frequency Blocks

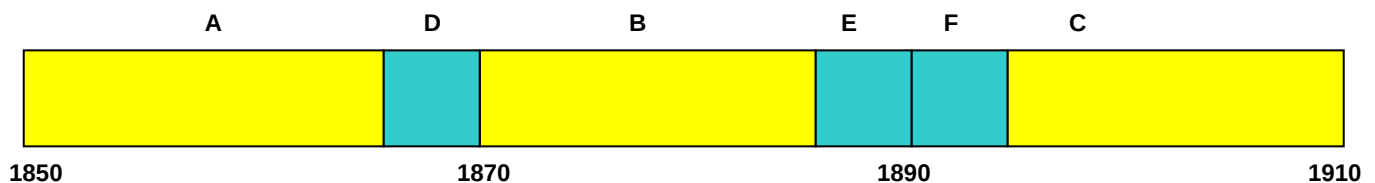

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 8 of 50

3.11 Radiated Spurious and Harmonic Emissions

§2.1053, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1(i))

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits.

3.12 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235; RSS-129 (9.2.1), RSS-133 (6.7(a,b))

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 9 of 50

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4407B ESA Spectrum Analyzer	04/29/07	Annual	04/28/08	US39210313
Agilent	E5515C Wireless Communications Test Set	07/27/06	Biennial	07/26/08	GB41450275
Agilent	E5515C Wireless Communications Test Set	10/06/06	Biennial	10/05/08	GB43193972
Agilent	E5515C Wireless Communications Test Set	10/26/06	Biennial	10/25/08	GB46310798
EMCO	Model 3115 (1-18GHz) Horn Antenna	09/24/06	Biennial	09/23/08	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	09/25/06	Biennial	09/24/08	9704-5182
Rohde & Schwarz	NRVS Power Meter	07/03/07	Biennial	07/02/09	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	07/03/07	Biennial	07/02/09	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	11/08/06	Annual	11/08/07	107826
Rohde & Schwarz	CMU200 Base Station Simulator	09/07/07	Annual	09/06/08	833855/010
Rohde & Schwarz	CMU200 Base Station Simulator	05/24/07	Annual	05/23/08	836371/079
Agilent	HP 8566B (100Hz-22GHz) Spectrum Analyzer	12/21/06	Annual	12/21/07	3638A08713
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/08/07	Annual	03/07/08	MY45470194
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/12/06	Annual	12/12/07	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/12/06	Annual	12/12/07	N/A
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/12/06	Annual	12/12/07	3701A22204
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	4000/12000
Agilent	HP 8495A (0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
-	263-10dB (DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
Pasternack	PE2208-6 Bidirectional Coupler	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Rohde & Schwarz	NRVD Dual Channel Power Meter	12/11/06	Biennial	12/10/08	101695
Rohde & Schwarz	NRV-Z33 Peak Power Sensor (1mW-20W)	11/28/06	Biennial	11/27/08	100155

Table 4-1. Test Equipment

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 10 of 50

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Emission Designator = 40K0F8W

Calculation: Voice + SAT

Modulation: Voice is 2.5 kHz and SAT is 6 kHz – Maximum modulation is M = 6 kHz

Deviation: Voice is 12 kHz and SAT is 2 kHz – Maximum deviation is D = 12 + 2 = 14 kHz

$B_n = 2M + 2DK$ with K = 1

$B_n = 40$ kHz

Calculation: Signaling Tone (ST) + SAT

Modulation: ST is 10 kHz and SAT is 6 kHz – Maximum modulation is M = 10 kHz

Deviation: ST is 8 kHz and SAT is 2 kHz – Maximum deviation is D = 8 + 2 = 10 kHz

$B_n = 2M + 2DK$ with K = 1

$B_n = 40$ kHz

Emission Designator = 40K0F1D

Calculation: Voice + SAT

Modulation: Wideband Data is 10 kHz and SAT is 6 kHz – Maximum modulation is M = 10 kHz

Deviation: Wideband Data is 8 kHz and SAT is 2 kHz – Maximum deviation is D = 8 + 2 = 10 kHz

$B_n = 2xM + 2xDK$ with K = 1

$B_n = 40$ kHz

Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80) = 50.3 dBc.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 11 of 50

6.0 TEST RESULTS

6.1 Summary

Company Name: LG Electronics USA
 FCC ID: BEJLTGEN80L
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): AMPS / CDMA

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
2.1049, 22.917(a), 24.238(a)	N/A	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a)	RSS-129 (8.1.1) RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ dB at Band Edge and for all out-of-band emissions		PASS	Section 7.0
2.1046	N/A	Transmitter Conducted Output Power	N/A		PASS	Section 6.2
2.1047, TIA/EIA-553-A (2.1.4.1)	RSS-129 (6.3.2)	Sideband Power Attenuation (Analog)	Please refer to Section 3.4 of this report for test limits		PASS	Section 7.0
2.1047, TIA/EIA-553-A (2.1.3.1.4)	N/A	Transmitter Audio Frequency Response	Response must comply with limits set in Table 6.1 (RSS-129)		PASS	Section 7.0
2.1047, TIA/EIA-553-A (2.1.3.1.4)	RSS-129 (6.2)	Audio Low Pass Filter Frequency Response	Response must comply with limits set in Table 6.1 (RSS-129)		PASS	Section 7.0
2.1047, TIA/EIA-553-A (2.1.3.1.3)	RSS-129 (6.1)	Modulation Limiting	$\pm 12\text{kHz}$ from carrier frequency		PASS	Section 7.0
22.913(a)(2)	RSS-129 (9.1)	Effective Radiated Power	< 7 Watts max. ERP (< 6.3 Watts max. ERP (IC))	RADIATED	PASS	Section 6.3
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.4
2.1053, 22.917(a), 24.238(a)	RSS-129 (8.1.1) RSS-133 (6.5.1)	Undesirable Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Sections 6.5, 6.6, 6.7
2.1055, 22.355, 24.235	RSS-129 (9.2.1) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm		PASS	Sections 6.8, 6.9, 6.10

Table 6-1. Summary of Test Results

Note: "Summary of Test Results" table continued on next page.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 12 of 50

RECEIVER MODE (RX)						
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	N/A	Pt. 15B Test Report
15.109	RSS-129 (10(a,d)) RSS-133 (6.7(a,b)) RSS-210 (7.3)	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-Gen limits [Section 6; Table 1]	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Pt. 15B Test Report
RF EXPOSURE (SAR)						
2.1091 / 2.1093	RSS-102	MPE Test (at 20cm)	0.566 mW/cm ² (Cellular Band) 1 mW/cm ² (PCS Band)	MPE	PASS	MPE Report

Table 6-1. Summary of Test Results (Cont'd)

6.2 Conducted Output Power

§2.1046

This section contains conducted output power measurements for AMPS and CDMA modes. The CDMA conducted output power measurements were made while the device was operating in TDSO32 mode only.

Modulation	Channel	Conducted Power
		[dBm]
Frequency Modulation	991	28.16
	384	28.53
	799	28.79

Table 6-2. Maximum AMPS Conducted Power Output Table for Gen8.0L

Band	Channel	TDSO SO32 [dBm]
		RC3
Cellular	1013	24.38
	384	24.01
	777	24.33
PCS	25	24.78
	600	24.06
	1175	24.86

Table 6-3. Maximum CDMA Conducted Power Output Table for Gen8.0L

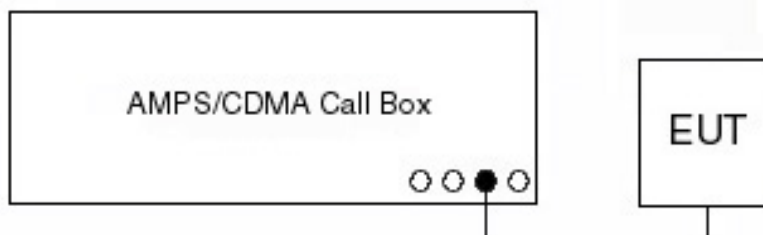


Figure 6-1. AMPS/CDMA Conducted Power Measurement Setup

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 13 of 50

6.3 Effective Radiated Power Output Data

§22.913(a)(2); RSS-129 (9.1)

POWER: High (Analog (AMPS) Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Power Source
824.04	-11.330	25.93	0.00	V	25.93	0.392	DC
836.52	-9.970	27.29	0.00	V	27.29	0.536	DC
848.97	-12.280	24.98	0.00	V	24.98	0.315	DC

Table 6-4. Effective Radiated Power Output Data (AMPS)

POWER: "All Up" Power Bits (CDMA Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Power Source
824.70	-18.930	22.75	0.00	H	22.75	0.188	DC
836.52	-18.370	23.31	0.00	H	23.31	0.214	DC
848.31	-15.340	26.34	0.00	H	26.34	0.431	DC

Table 6-5. Effective Radiated Power Output Data (CDMA)

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 14 of 50

6.4 Equivalent Isotropic Radiated Power Output Data

§24.232(c); RSS-133 (6.4) [SRSP-510 (5.1.2)]

POWER: "All Up" Power Bits (PCS CDMA Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Power Source
1851.25	-21.930	13.10	8.00	H	21.10	0.129	DC
1880.00	-18.310	16.72	8.00	H	24.72	0.296	DC
1908.75	-20.110	14.92	8.00	H	22.92	0.196	DC

Table 6-6. Equivalent Isotropic Radiated Power Output Data

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 15 of 50

6.5 AMPS Radiated Measurements

S2.1053, 22.917(a): RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.04 MHz
 CHANNEL: 991
 MEASURED OUTPUT POWER: 27.290 dBm = 0.536 W
 MODULATION SIGNAL: FM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.29 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.08	-50.67	6.08	-44.59	H	71.9
2472.12	-45.05	6.53	-38.52	H	65.8
3296.16	-38.03	6.87	-31.16	H	58.5
4120.20	-43.90	7.21	-36.69	H	64.0
4944.24	-51.04	8.37	-42.67	H	70.0

Table 6-7. Radiated Spurious Data (AMPS Mode – Ch. 991)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 16 of 50

AMPS Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 27.290 dBm = 0.536 W
 MODULATION SIGNAL: FM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.29 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-59.43	6.08	-53.35	H	80.6
2509.56	-28.39	6.53	-21.86	H	49.1
3346.08	-32.56	6.87	-25.69	H	53.0
4182.60	-41.30	7.21	-34.09	H	61.4
5019.12	-46.61	8.37	-38.24	H	65.5

Table 6-8. Radiated Spurious Data (AMPS Mode – Ch. 384)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 17 of 50

AMPS Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.97 MHz
 CHANNEL: 799
 MEASURED OUTPUT POWER: 27.290 dBm = 0.536 W
 MODULATION SIGNAL: FM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.29 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.94	-53.90	6.08	-47.82	H	75.1
2546.91	-24.50	6.53	-17.97	H	45.3
3395.88	-28.24	6.87	-21.36	H	48.7
4244.85	-28.15	7.21	-20.94	H	48.2
5093.82	-38.43	8.37	-30.06	H	57.4

Table 6-9. Radiated Spurious Data (AMPS Mode – Ch. 799)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 18 of 50

6.6 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a): RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 26.340 dBm = 0.431 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.34 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-61.71	6.08	-55.63	H	82.0
2474.10	-61.59	6.53	-55.06	H	81.4
3298.80	-55.73	6.87	-48.86	H	75.2
4123.50	-60.20	7.21	-52.99	H	79.3
4948.20	-63.29	8.37	-54.92	H	81.3

Table 6-10. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 19 of 50

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 26.340 dBm = 0.431 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.34 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-67.23	6.08	-61.15	H	87.5
2509.56	-53.99	6.53	-47.46	H	73.8
3346.08	-55.36	6.87	-48.49	H	74.8
4182.60	-59.20	7.21	-51.99	H	78.3
5019.12	-63.91	8.37	-55.54	H	81.9

Table 6-11. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 20 of 50

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 26.340 dBm = 0.431 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.34 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-59.96	6.08	-53.87	H	80.2
2544.93	-34.20	6.53	-27.67	H	54.0
3393.24	-46.99	6.87	-40.12	H	66.5
4241.55	-46.00	7.21	-38.79	H	65.1
5089.86	-57.99	8.37	-49.62	H	76.0

Table 6-12. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 21 of 50

6.7 PCS CDMA Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 24.720 dBm = 0.296 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.72 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-36.69	9.02	-27.67	H	52.4
5553.75	-40.71	10.40	-30.31	H	55.0
7405.00	-47.55	10.51	-37.04	H	61.8
9256.25	-82.87	11.84	-71.03	H	95.7
11107.50	-81.71	12.76	-68.95	H	93.7

Table 6-13. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 22 of 50

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 24.720 dBm = 0.296 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.72 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-28.57	9.02	-19.56	H	44.3
5640.00	-31.76	10.40	-21.36	H	46.1
7520.00	-49.22	10.51	-38.71	H	63.4
9400.00	-82.50	11.84	-70.66	H	95.4
11280.00	-81.42	12.76	-68.67	H	93.4

Table 6-14. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 23 of 50

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 24.720 dBm = 0.296 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.72 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-22.81	9.02	-13.79	H	38.5
5726.25	-30.10	10.40	-19.70	H	44.4
7635.00	-46.34	10.51	-35.84	H	60.6
9543.75	-82.20	11.84	-70.36	H	95.1
11452.50	-81.14	12.76	-68.39	H	93.1

Table 6-15. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the highest power is reported with RC3/TDSO32 with "All Up" power control bits. This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 24 of 50



6.8 Frequency Stability (AMPS)

S2.1055, 22.355; RSS-129 (9.2.1)

OPERATING FREQUENCY: 836,520,000 Hz

CHANNEL: 384

REFERENCE VOLTAGE: 12.2 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.20	+ 20 (Ref)	836,519,998	-2	0.000000
100 %		- 30	836,520,003	3	0.000000
100 %		- 20	836,519,999	-1	0.000000
100 %		- 10	836,520,013	13	0.000002
100 %		0	836,520,015	15	0.000002
100 %		+ 10	836,519,996	-4	0.000000
100 %		+ 20	836,519,988	-12	-0.000001
100 %		+ 30	836,520,002	2	0.000000
100 %		+ 40	836,520,003	3	0.000000
100 %		+ 50	836,519,991	-9	-0.000001
115 %	14.03	+ 20	836,519,995	-5	-0.000001
85 %	10.37	+ 20	836,519,989	-11	-0.000001

Table 6-16. Frequency Stability Data (AMPS Mode – Ch. 384)

Note:

This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 25 of 50

Frequency Stability (AMPS) (Cont'd)

§2.1055, 22.355; RSS-129 (9.2.1)

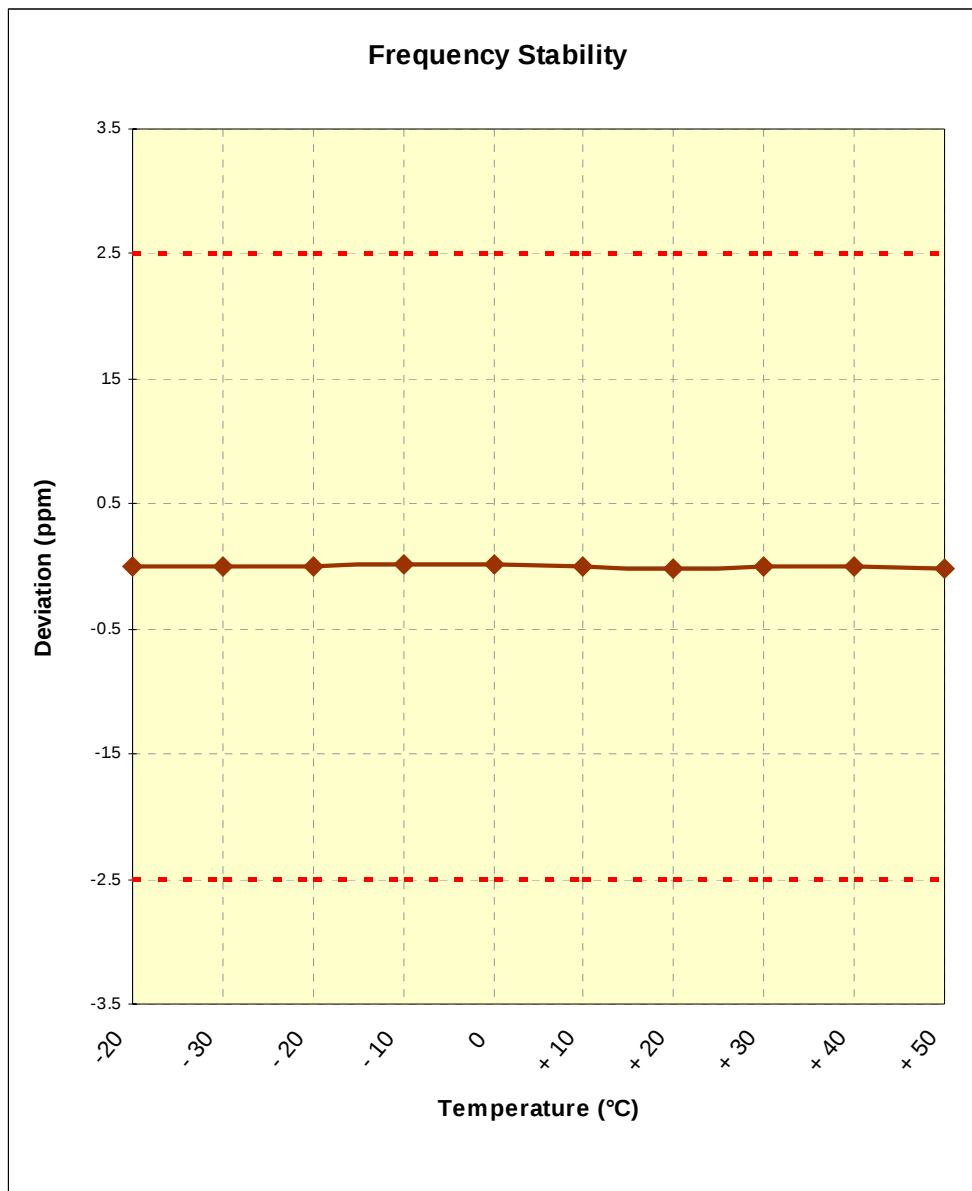


Figure 6-2. Frequency Stability Graph (AMPS Mode – Ch.384)

Note:

This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 26 of 50



6.9 Frequency Stability (Cellular CDMA)

§2.1055, 22.355; RSS-129 (9.2.1)

OPERATING FREQUENCY: 836,520,000 Hz

CHANNEL: 384

REFERENCE VOLTAGE: 12.2 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.20	+ 20 (Ref)	836,519,998	-2	0.000000
100 %		- 30	836,520,003	3	0.000000
100 %		- 20	836,519,999	-1	0.000000
100 %		- 10	836,520,013	13	0.000002
100 %		0	836,520,015	15	0.000002
100 %		+ 10	836,519,996	-4	0.000000
100 %		+ 20	836,519,988	-12	-0.000001
100 %		+ 30	836,520,002	2	0.000000
100 %		+ 40	836,520,003	3	0.000000
100 %		+ 50	836,519,991	-9	-0.000001
115 %	14.03	+ 20	836,519,995	-5	-0.000001
85 %	10.37	+ 20	836,519,989	-11	-0.000001

Table 6-17. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

Note:

This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth	Page 27 of 50	

Frequency Stability (Cellular CDMA) (Cont'd)

§2.1055, 22.355; RSS-129 (9.2.1)

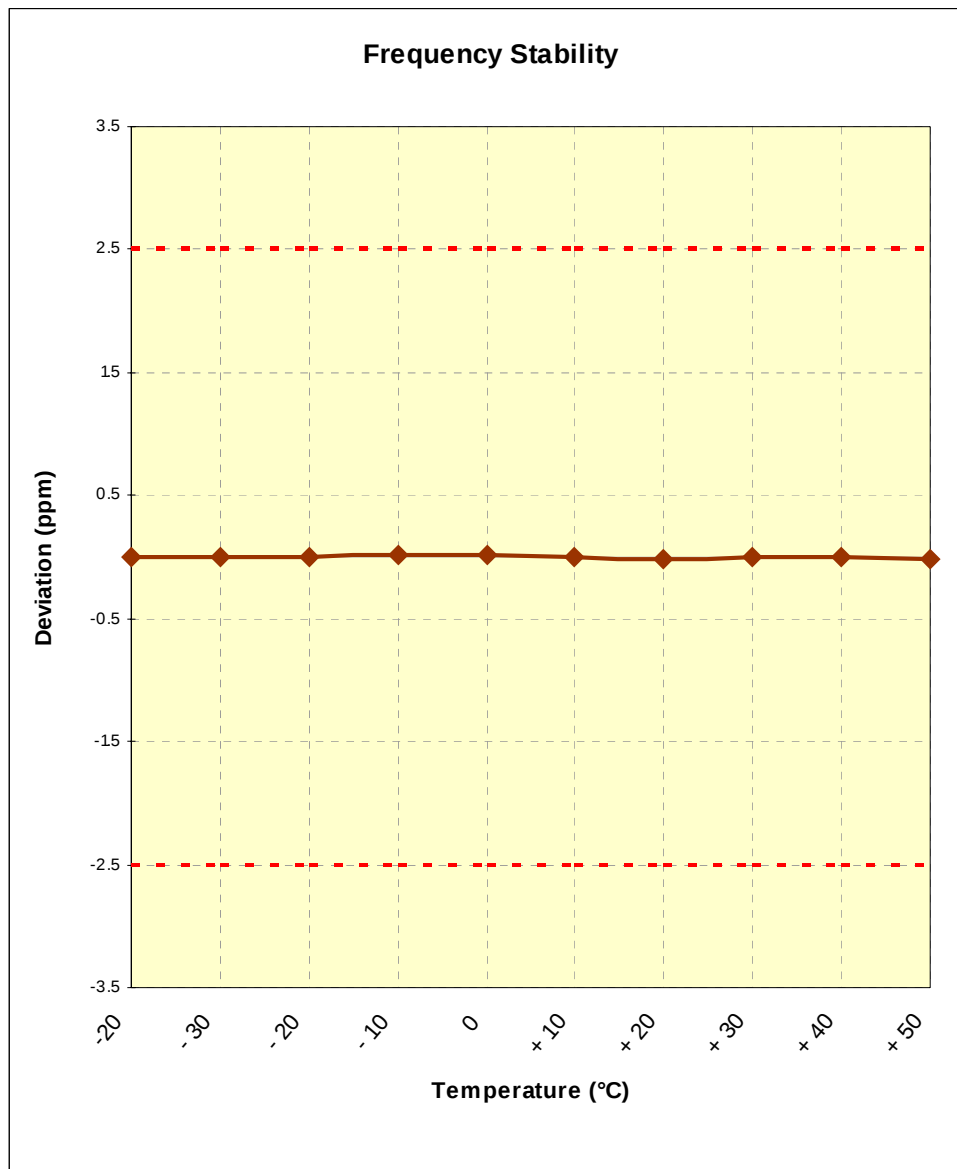


Figure 6-3. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

Note:

This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 28 of 50



6.10 Frequency Stability (PCS CDMA)

§2.1055, 24.235; RSS-133 (6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 600

REFERENCE VOLTAGE: 12.2 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.20	+ 20 (Ref)	1,880,000,014	14	0.000001
100 %		- 30	1,879,999,997	-3	0.000000
100 %		- 20	1,880,000,010	10	0.000001
100 %		- 10	1,880,000,009	9	0.000000
100 %		0	1,879,999,996	-4	0.000000
100 %		+ 10	1,880,000,013	13	0.000001
100 %		+ 20	1,879,999,997	-3	0.000000
100 %		+ 30	1,879,999,995	-5	0.000000
100 %		+ 40	1,880,000,002	2	0.000000
100 %		+ 50	1,879,999,994	-6	0.000000
115 %	14.03	+ 20	1,880,000,014	14	0.000001
85 %	10.37	+ 20	1,879,999,994	-6	0.000000

Table 6-18. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

Note:

This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 29 of 50

Frequency Stability (PCS CDMA) (Cont'd)

§2.1055, 24.235; RSS-133 (6.3)

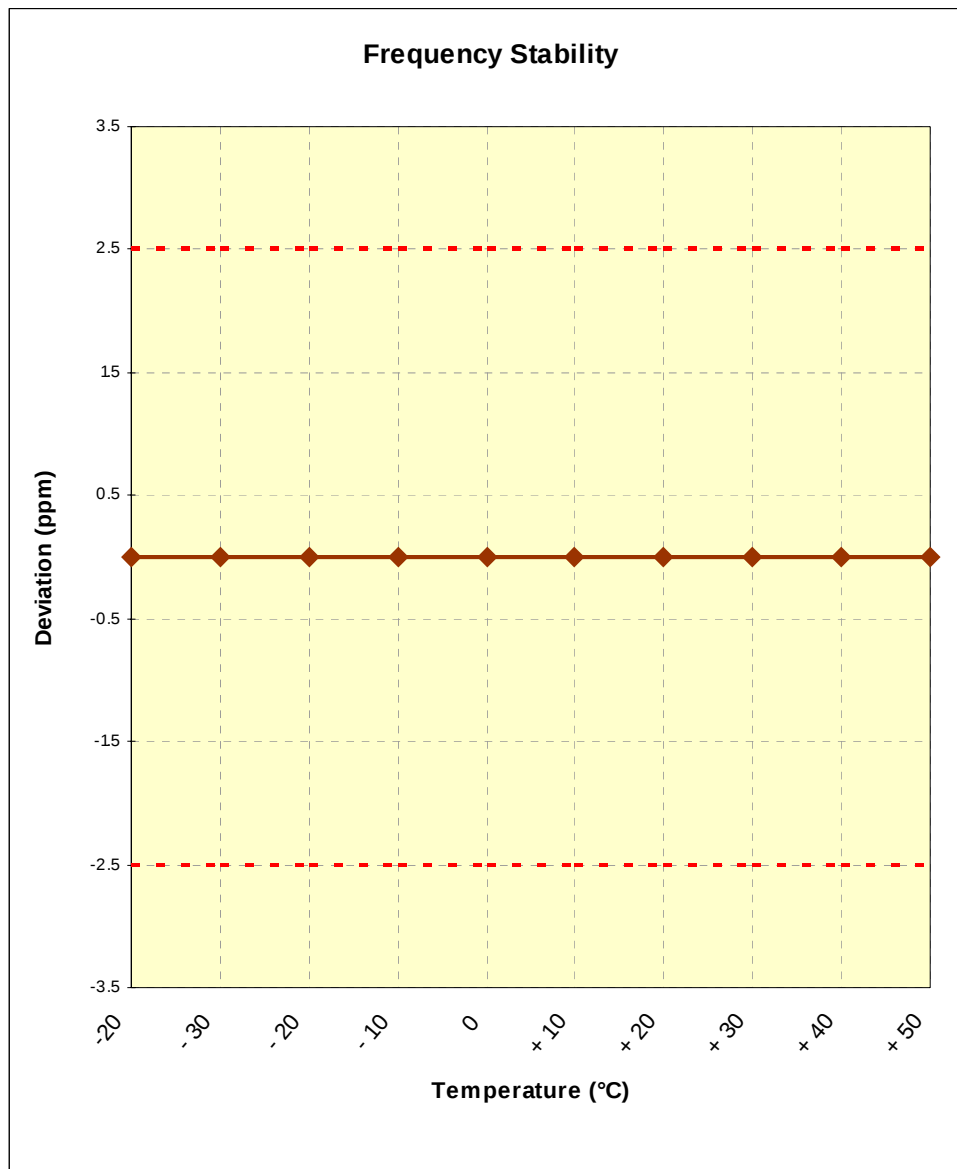



Figure 6-4. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

Note:


This unit was tested while powered by a DC power supply.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 30 of 50

7.0 PLOTS OF EMISSIONS

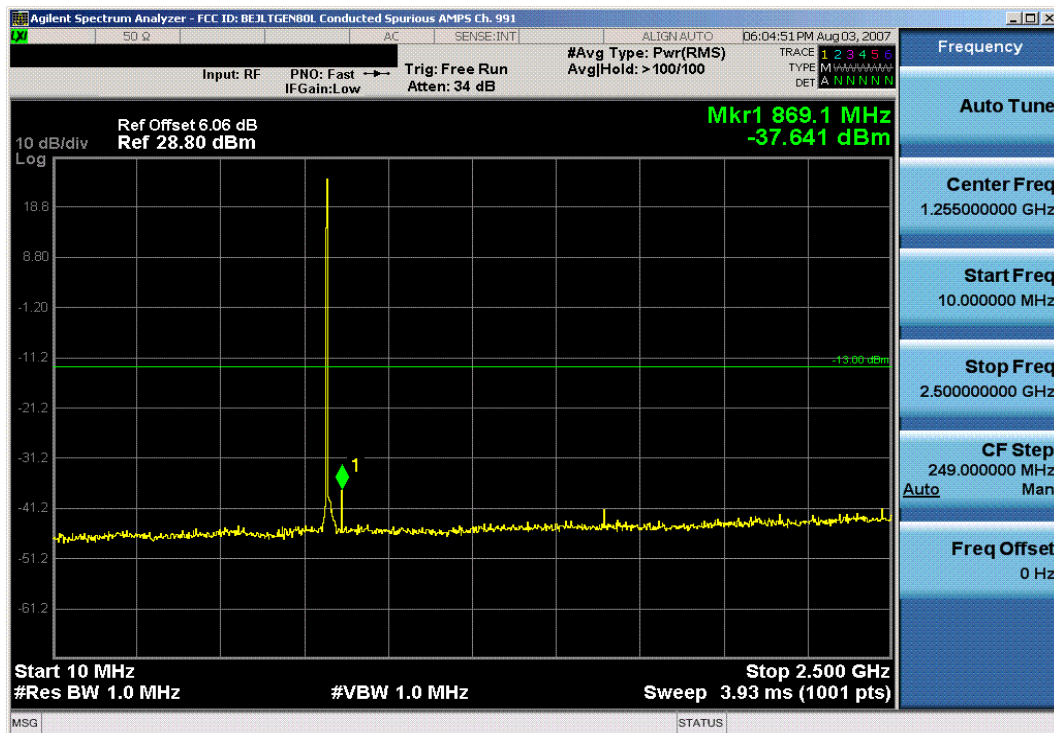


Plot 7-1. Conducted Spurious Plot (AMPS Mode – Ch. 991)

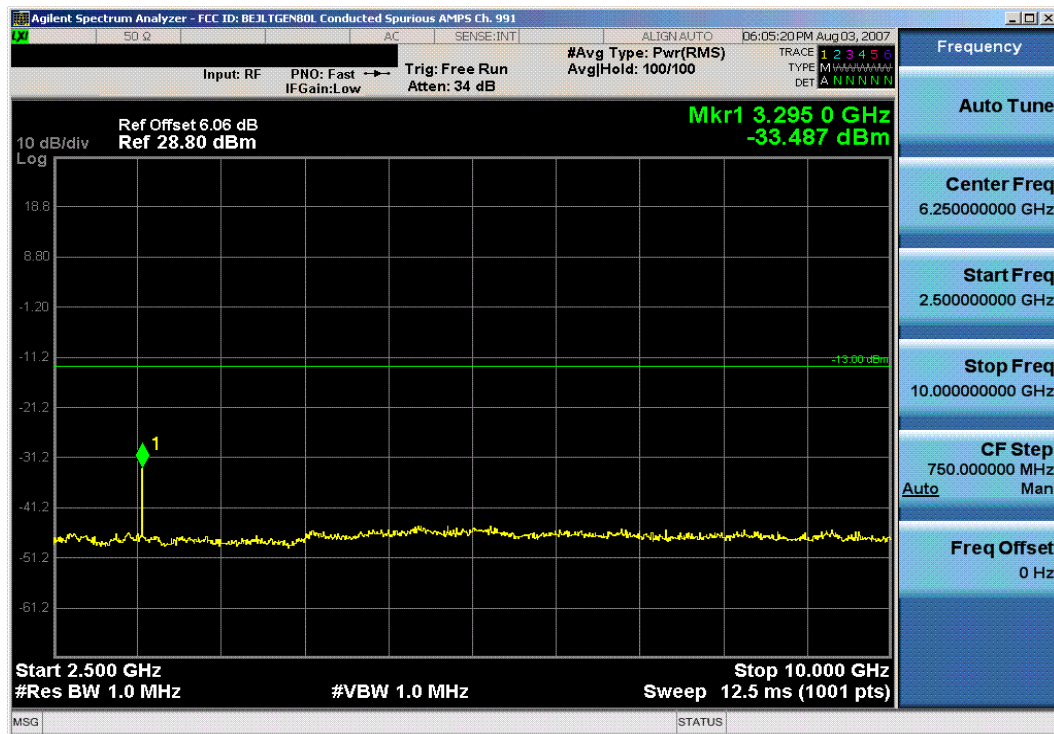


Plot 7-2. Conducted Spurious Plot (AMPS Mode – Ch. 991)

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 31 of 50

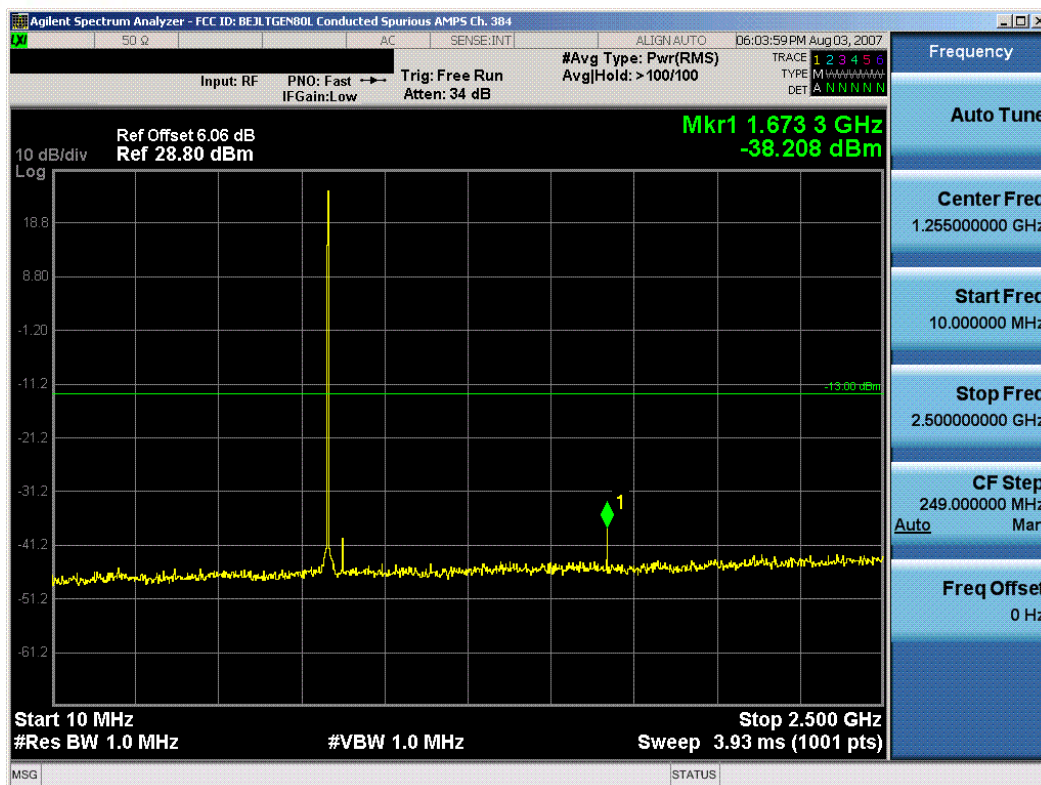


Plot 7-3. Conducted Spurious Plot (AMPS Mode – Ch. 384)

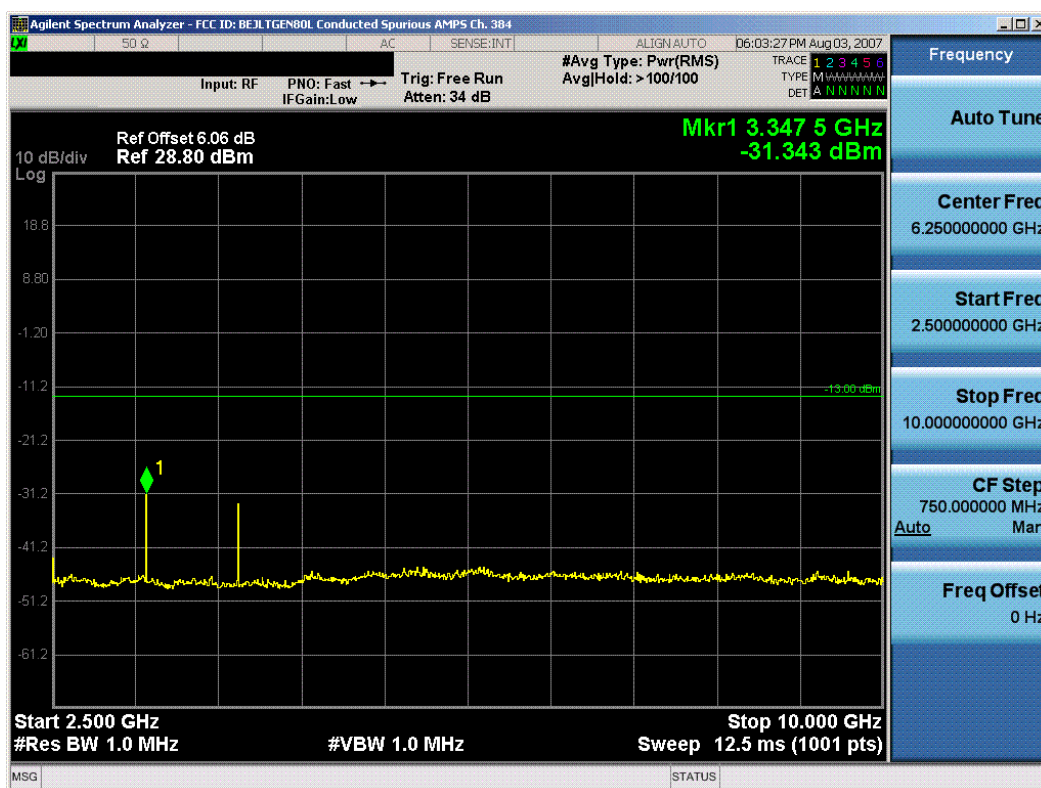


Plot 7-4. Conducted Spurious Plot (AMPS Mode – Ch. 384)

FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 32 of 50

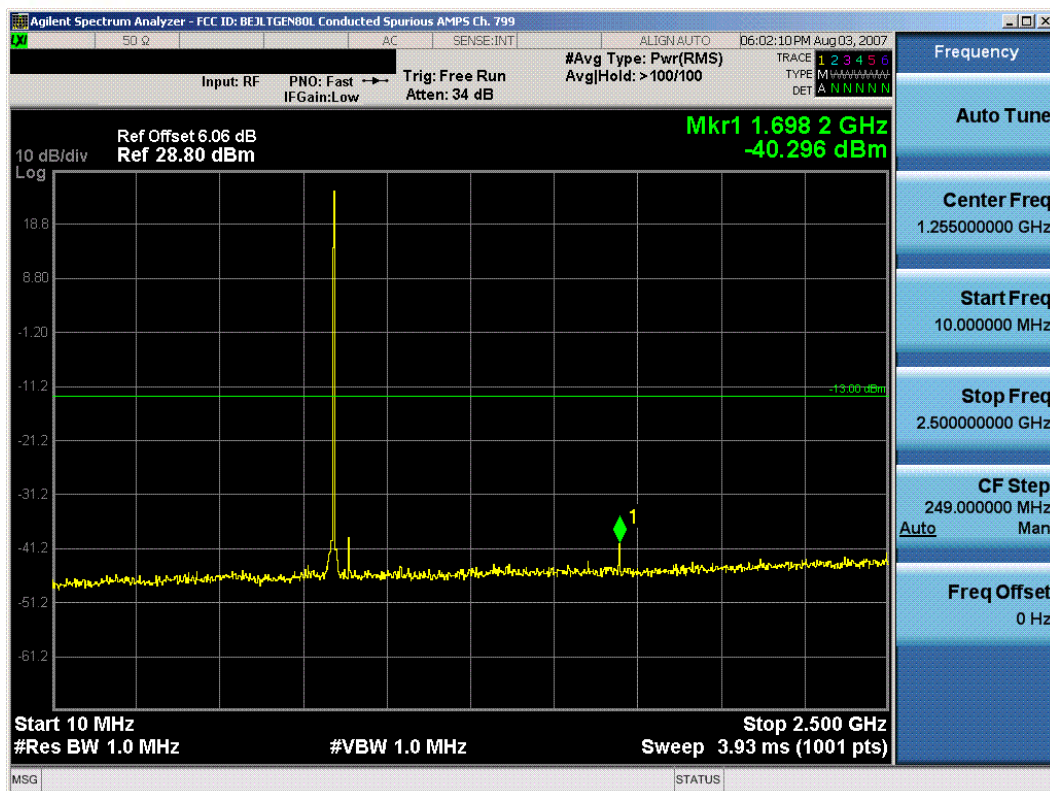


Plot 7-5. Conducted Spurious Plot (AMPS Mode – Ch. 799)

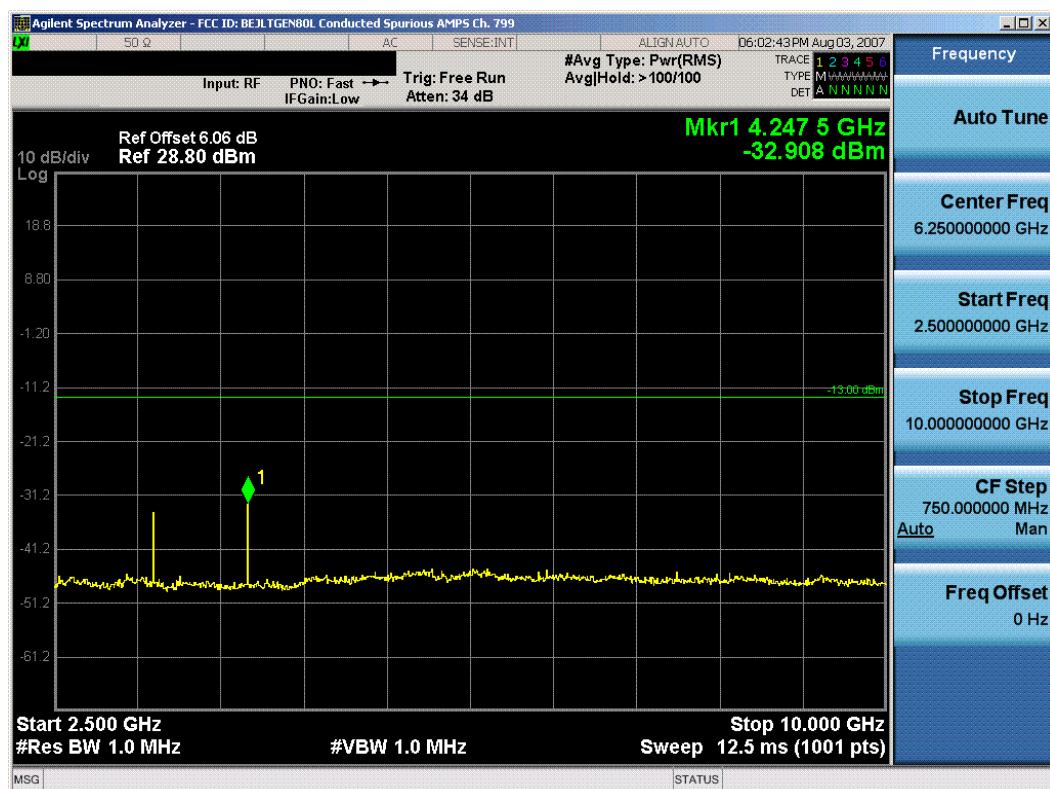

Plot 7-6. Conducted Spurious Plot (AMPS Mode – Ch. 799)


FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 33 of 50

Modulation Limiting

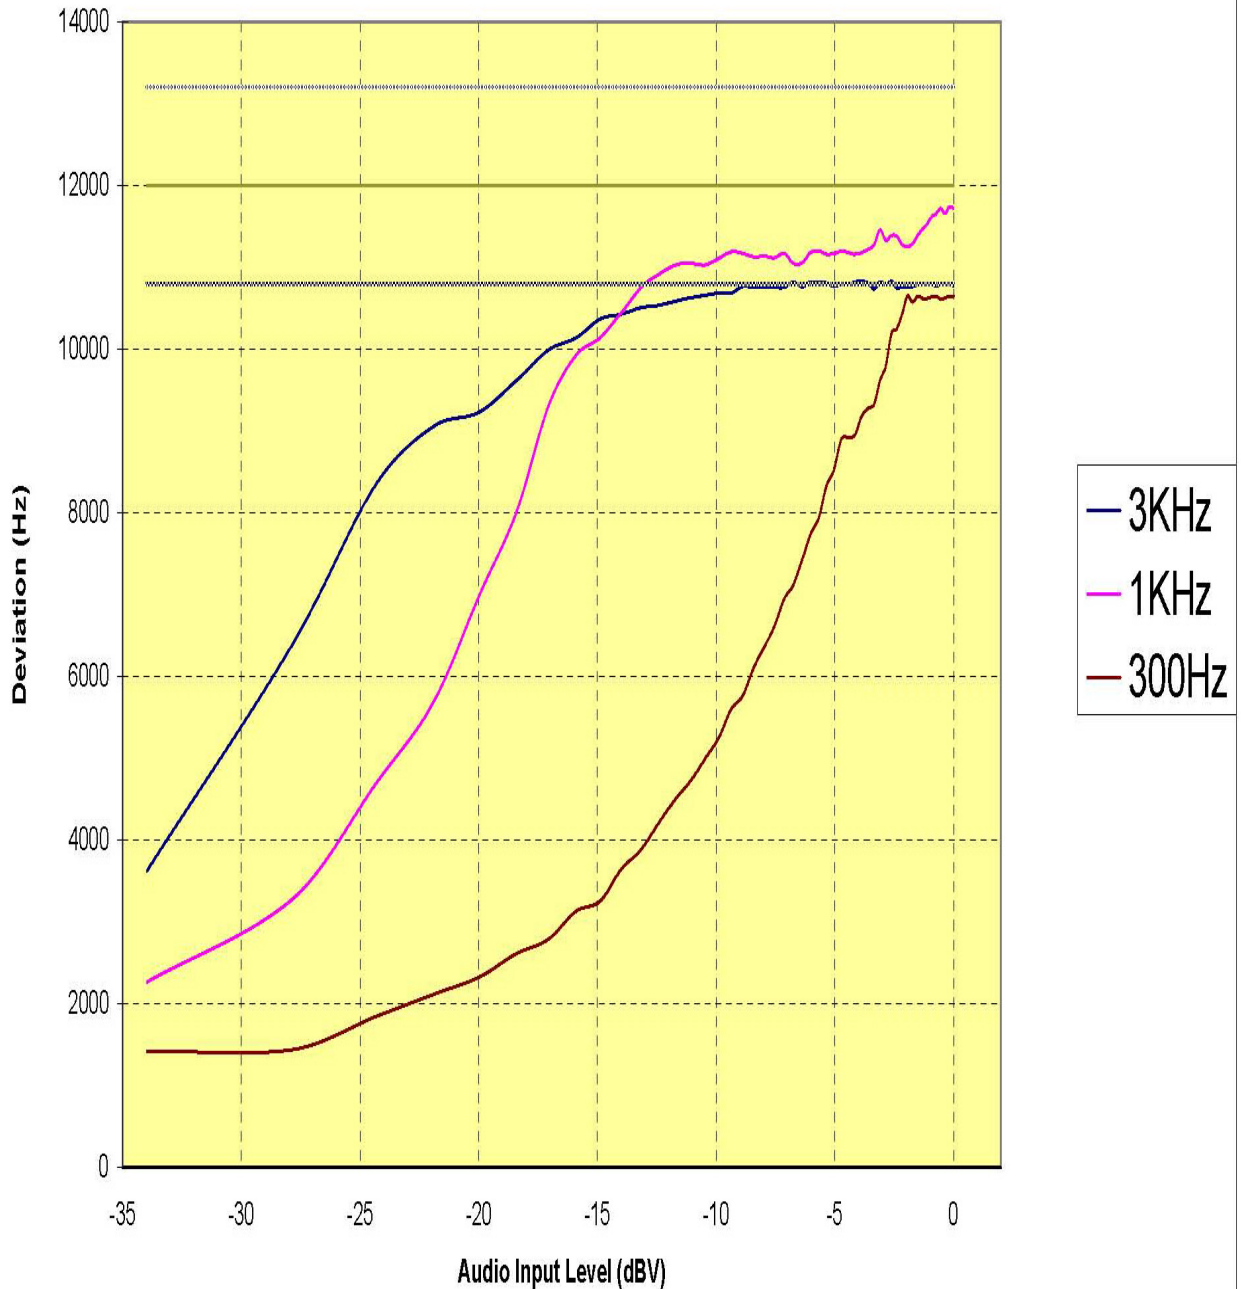


Plot 7-7. Modulation Limiting Plot (AMPS Mode – Ch. 384)

FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 34 of 50

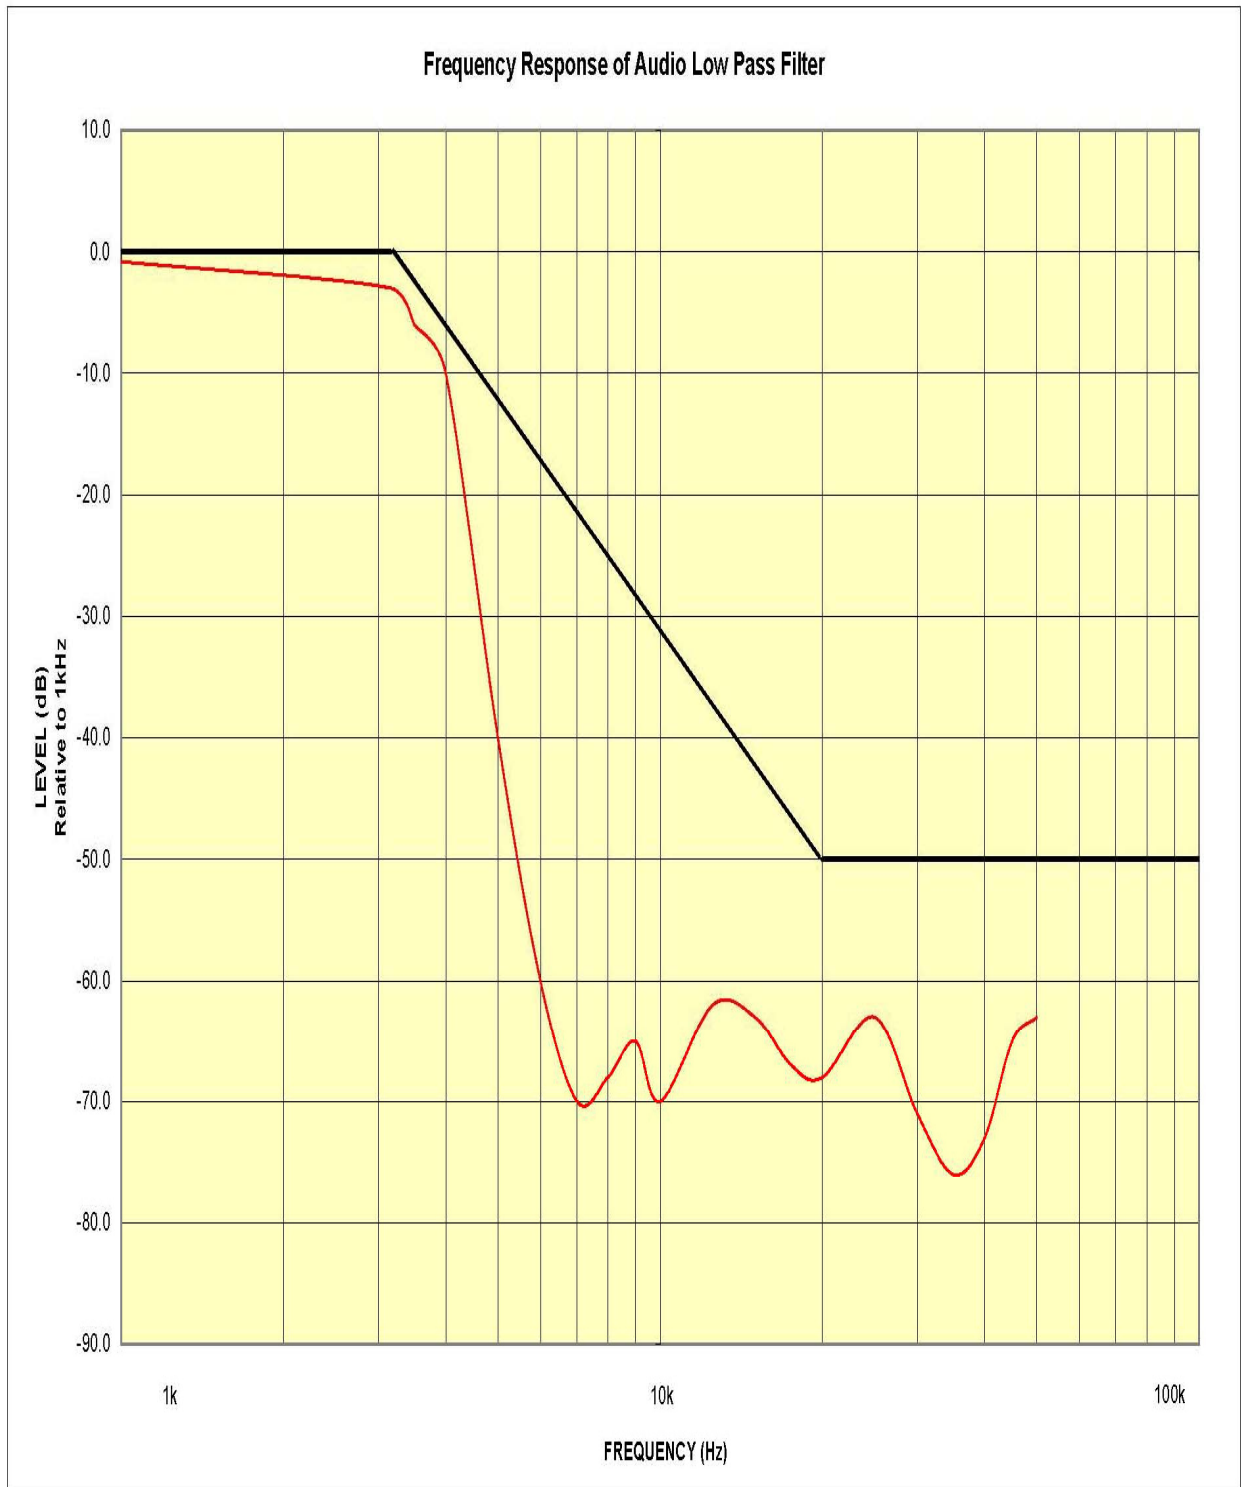

Plot 7-8. Frequency Response of Audio Low Pass Filter Plot (AMPS Mode – Ch. 384)

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 35 of 50

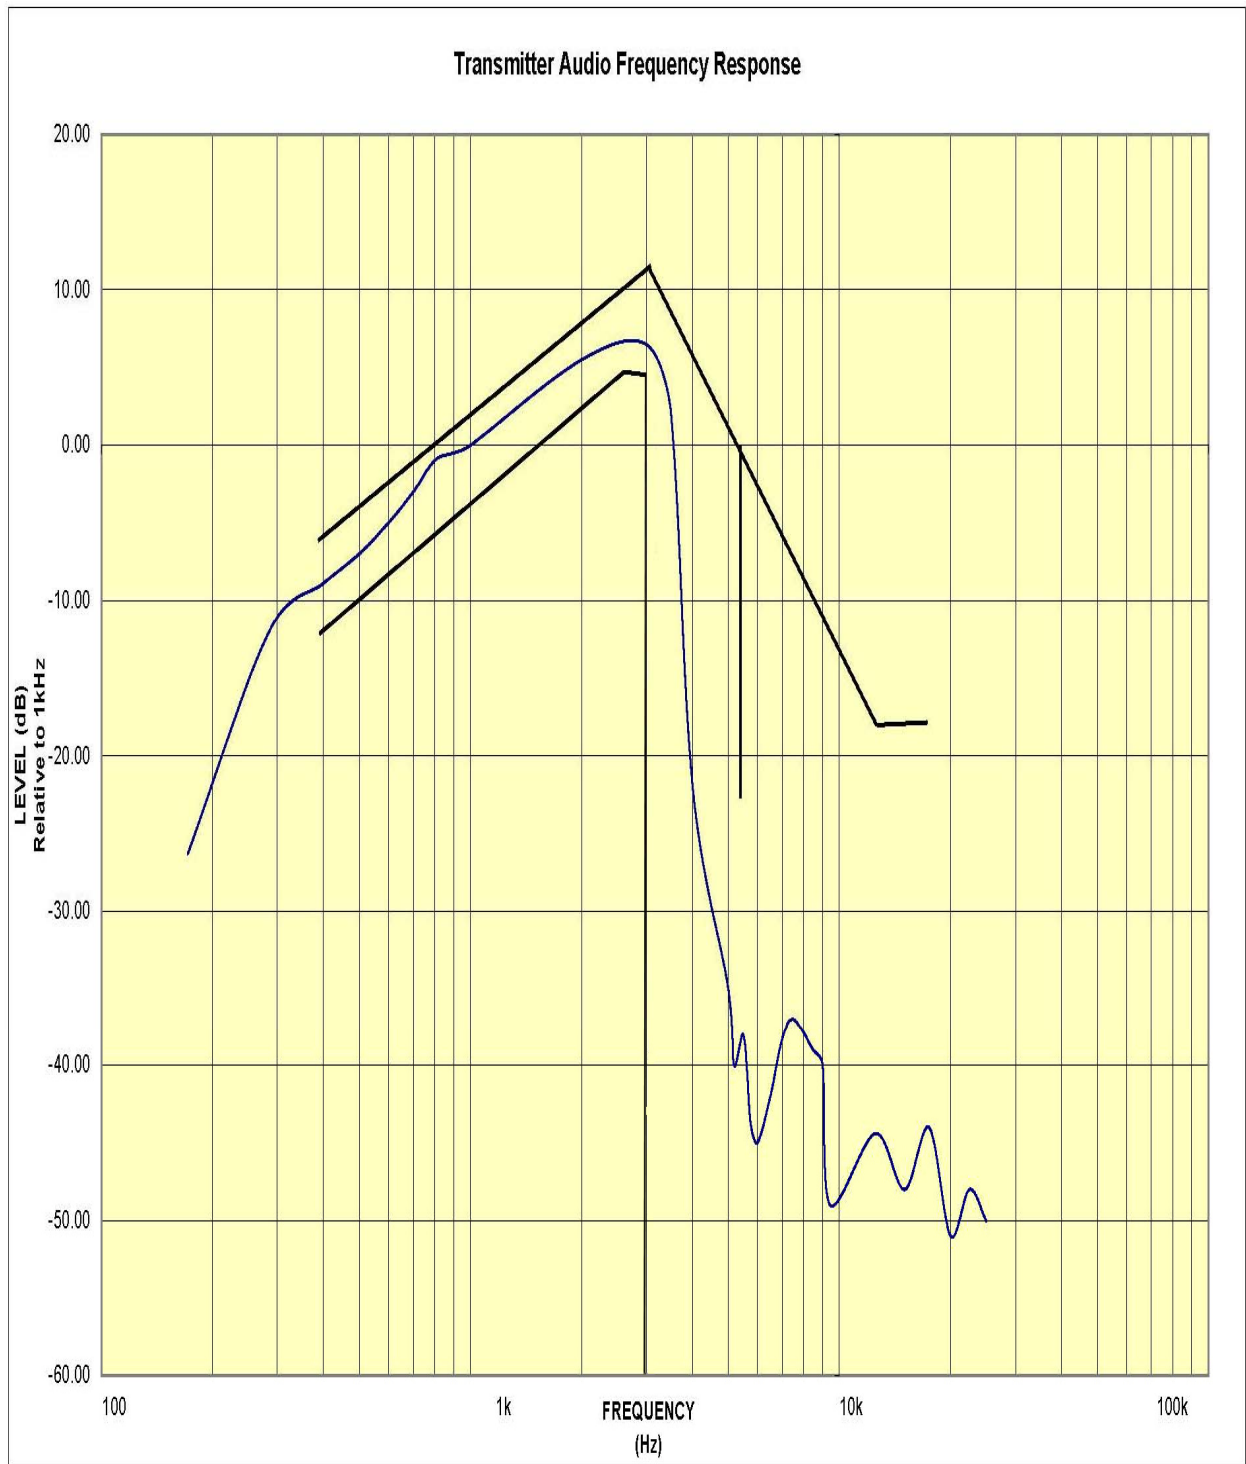

Plot 7-9. Transmitter Audio Frequency Response (AMPS Mode – Ch. 384)

FCC ID: BEJLTGEN80L	 PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 36 of 50




PCTEST Engineering Laboratory Inc.

SPECTRUM PRESENTATION

FCC ID: BEJLTGEN80L
LG Telematics
QUAD-Band Module
FM Channel 384
Operating Frequency: 836.52 MHz
Output Power: 28.5 dBm
Test Mode: Unmodulated Signal

REF 28.5 dBm ATTEN 40 dB

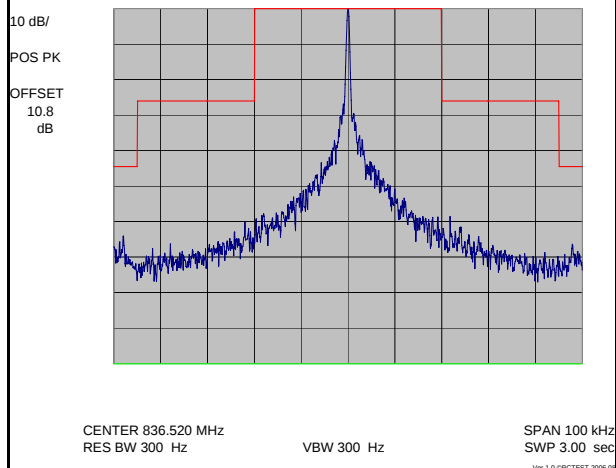


Plot 7-10. Unmodulated Signal

PCTEST Engineering Laboratory Inc.

SPECTRUM PRESENTATION

FCC ID: BEJLTGEN80L
LG Telematics
QUAD-Band Module
FM Channel 384
Operating Frequency: 836.52 MHz
Output Power: 28.5 dBm
Test Mode: ST

REF 28.5 dBm ATTEN 40 dB

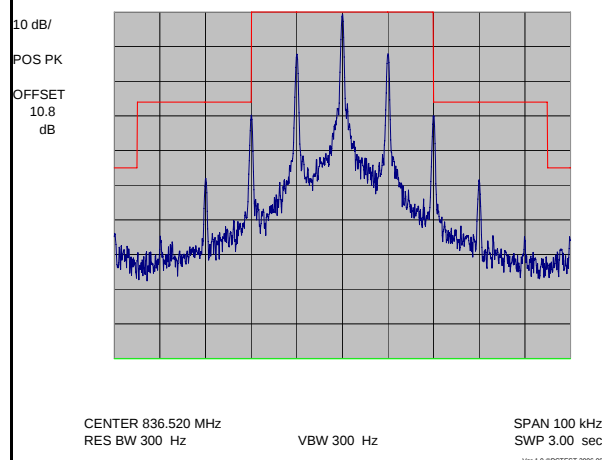


Plot 7-11. Signaling Tone (ST)

PCTEST Engineering Laboratory Inc.

SPECTRUM PRESENTATION

FCC ID: BEJLTGEN80L
LG Telematics
QUAD-Band Module
FM Channel 384
Operating Frequency: 836.52 MHz
Output Power: 28.5 dBm
Test Mode: SAT

REF 28.5 dBm ATTEN 40 dB

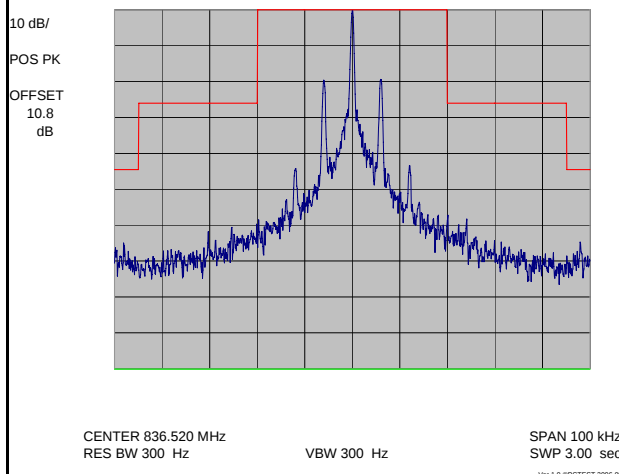


Plot 7-12. Supervisory Audio Tone (SAT)

PCTEST Engineering Laboratory Inc.

SPECTRUM PRESENTATION

FCC ID: BEJLTGEN80L
LG Telematics
QUAD-Band Module
FM Channel 384
Operating Frequency: 836.52 MHz
Output Power: 28.5 dBm
Test Mode: Wide Band Data

REF 28.5 dBm ATTEN 40 dB

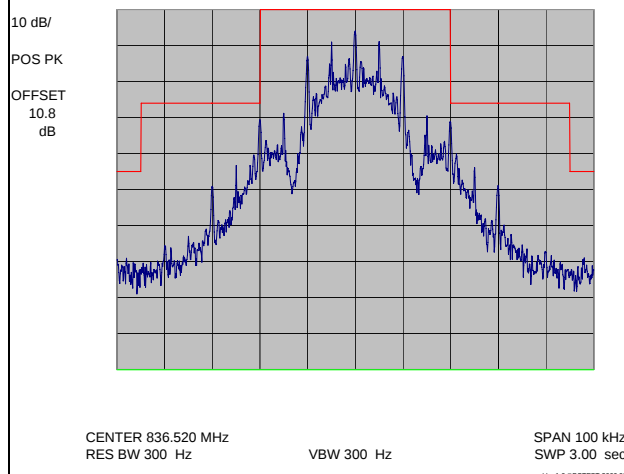

Plot 7-13. Wide Band Data Signal (WBD)


FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 37 of 50

PCTEST Engineering Laboratory Inc.

SPECTRUM PRESENTATION

FCC ID: BEJLTGEN80L
 LG Telematics
 QUAD-Band Module
 FM Channel 384
 Operating Frequency: 836.52 MHz
 Output Power: 28.5 dBm
 Test Mode: Voice

REF 28.5 dBm ATTEN 40 dB

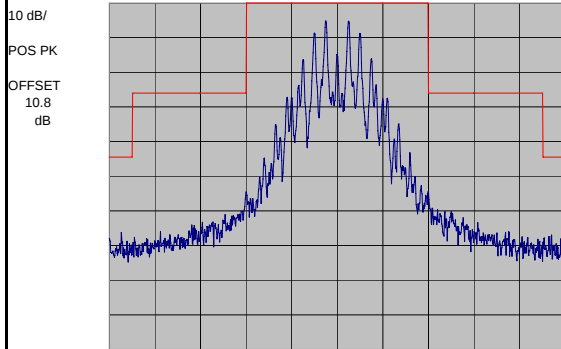

CENTER 836.520 MHz
 RES BW 300 Hz
 VBW 300 Hz
 SWP 3.00 sec


Plot 7-14. Voice

PCTEST Engineering Laboratory Inc.

SPECTRUM PRESENTATION


FCC ID: BEJLTGEN80L
 LG Telematics
 QUAD-Band Module
 FM Channel 384
 Operating Frequency: 836.52 MHz
 Output Power: 28.5 dBm
 Test Mode: SAT + DTMF

REF 28.5 dBm ATTEN 40 dB

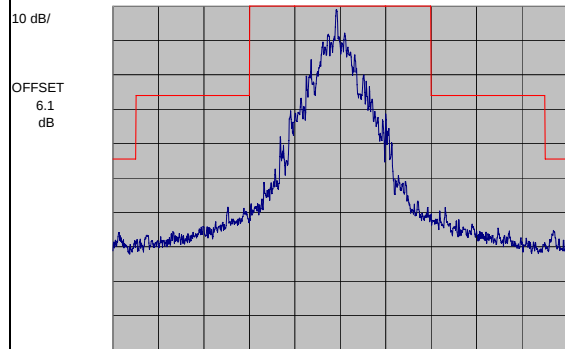


CENTER 836.520 MHz
 RES BW 300 Hz
 VBW 300 Hz
 SWP 3.00 sec

Plot 7-15. SAT+DTMF

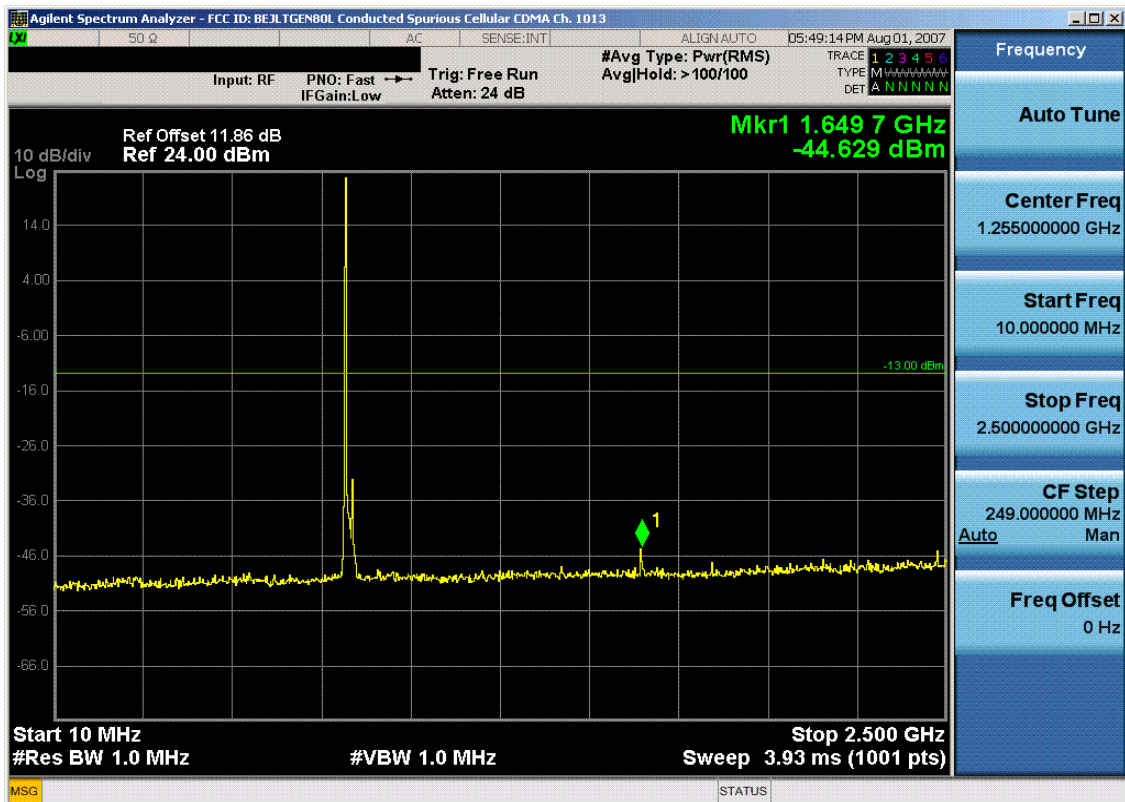


Plot 7-16. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 38 of 50

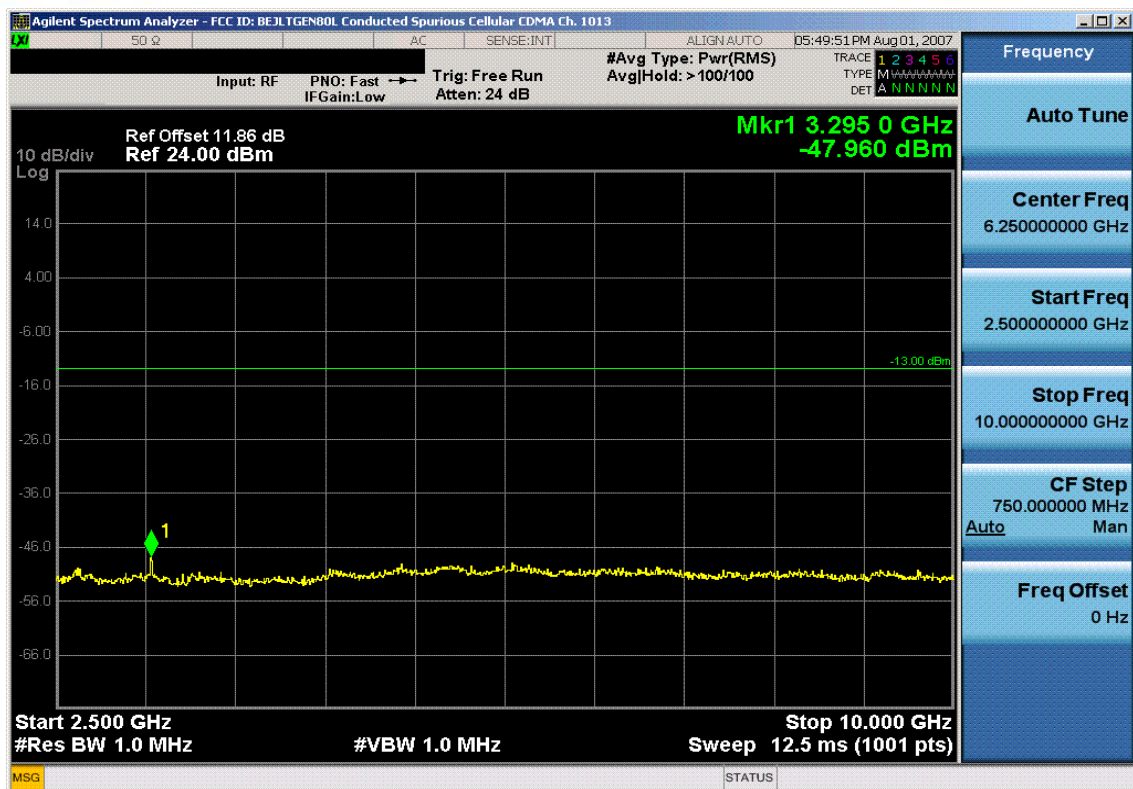

Plot 7-17. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

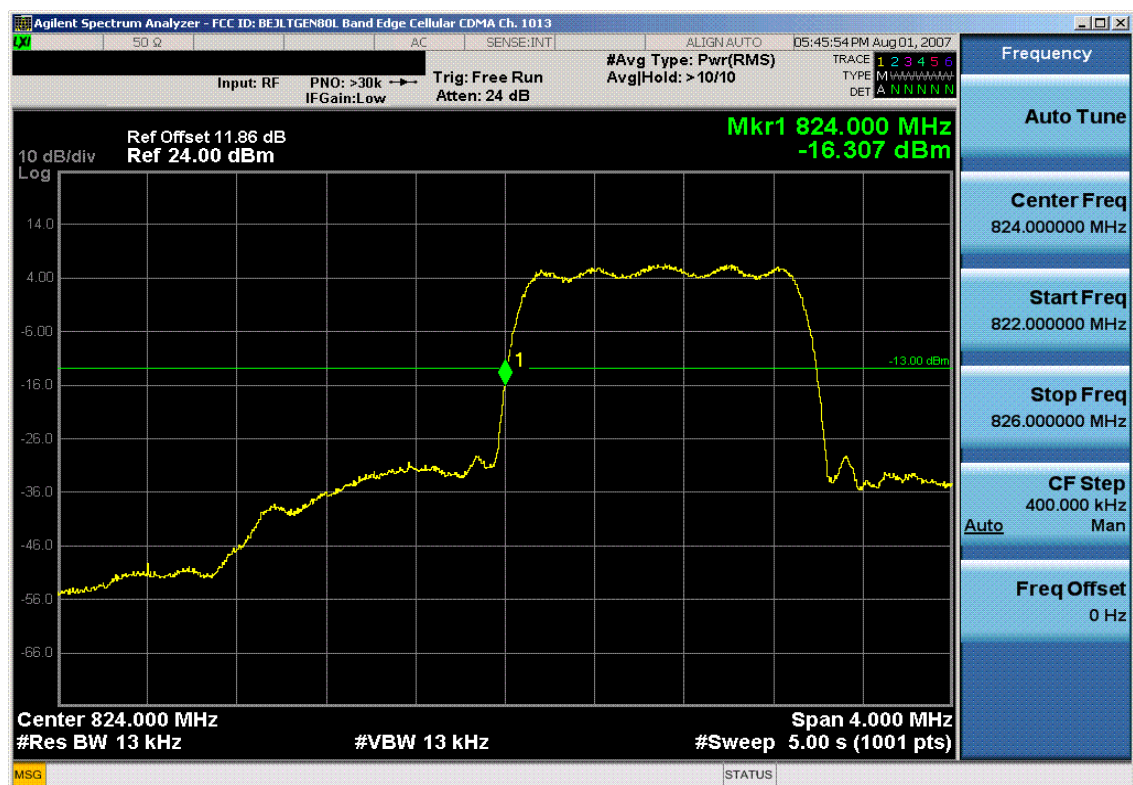


Plot 7-18. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 39 of 50




Plot 7-19. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

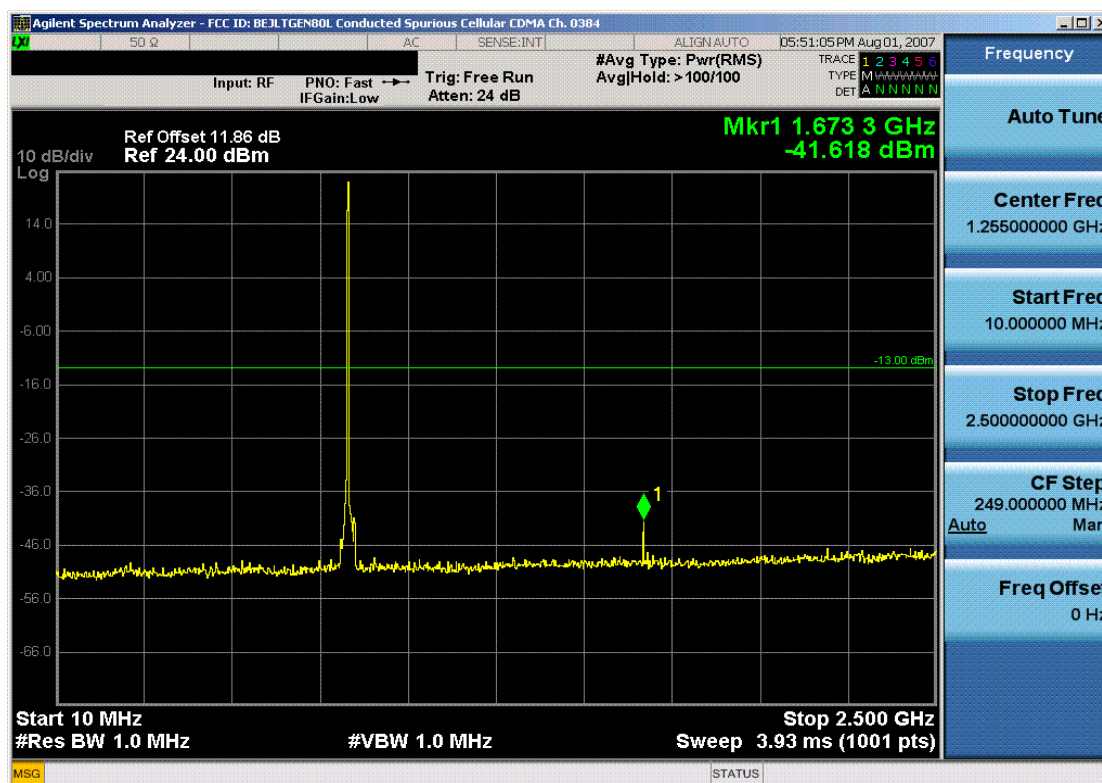


Plot 7-20. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 40 of 50

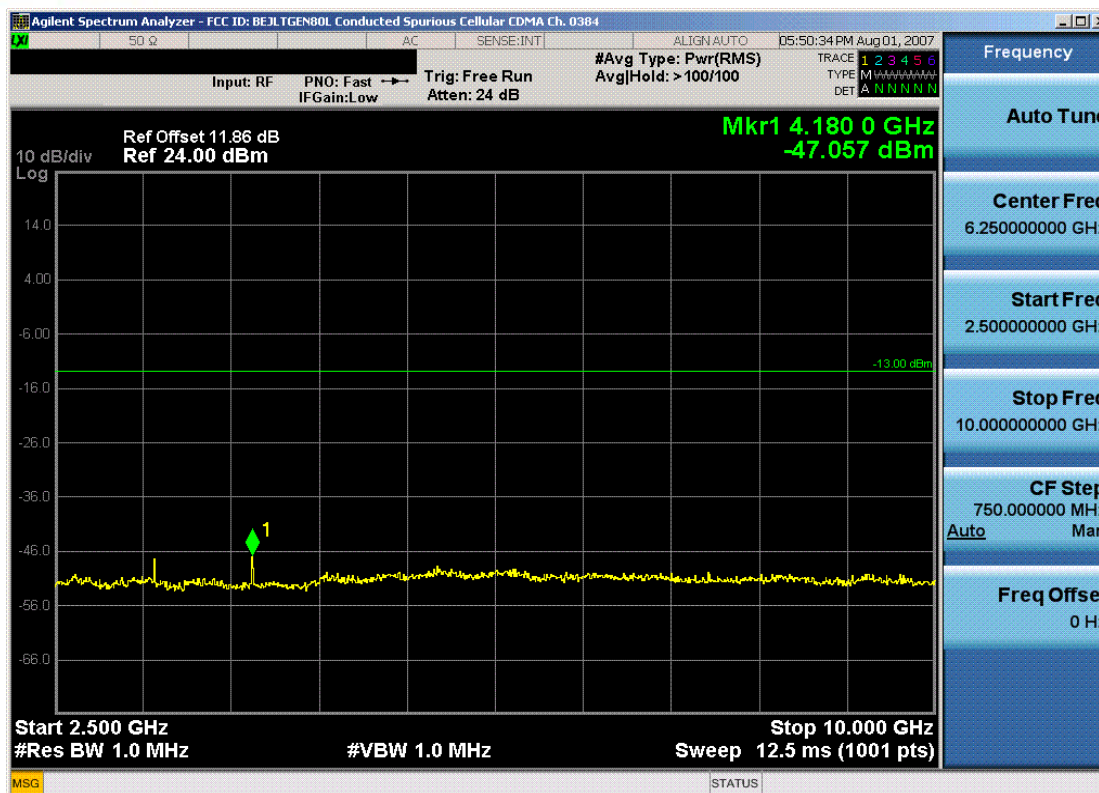


Plot 7-21. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

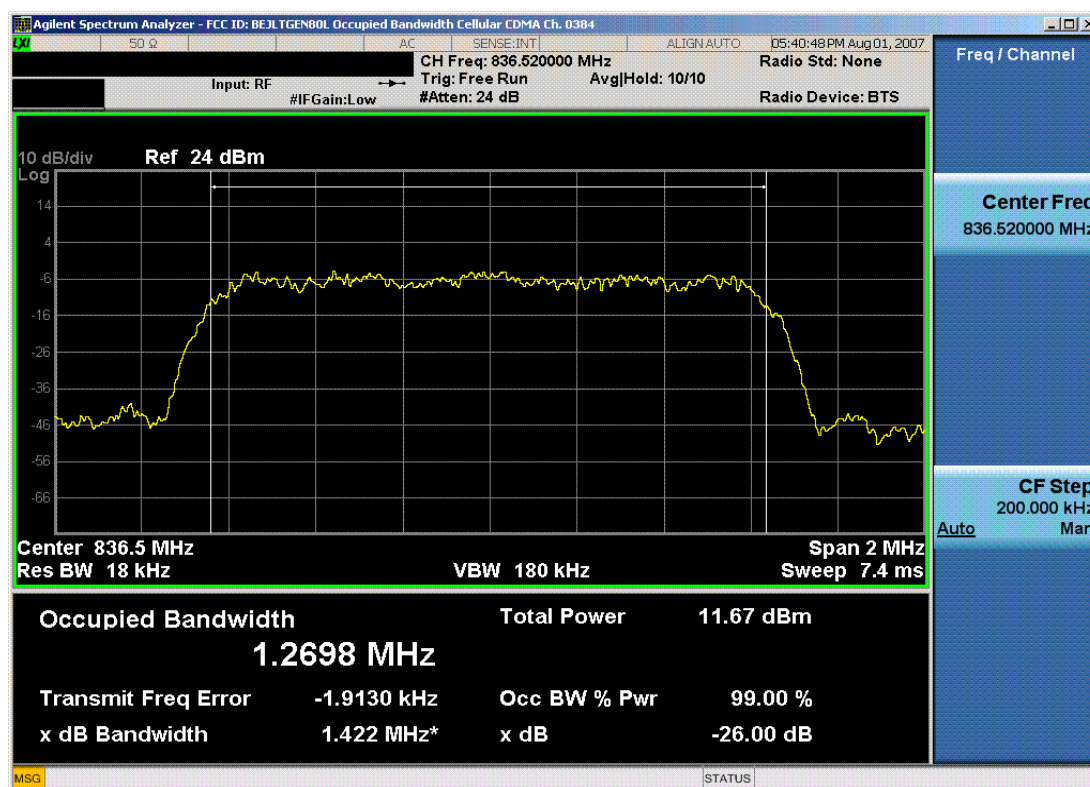


Plot 7-22. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 41 of 50

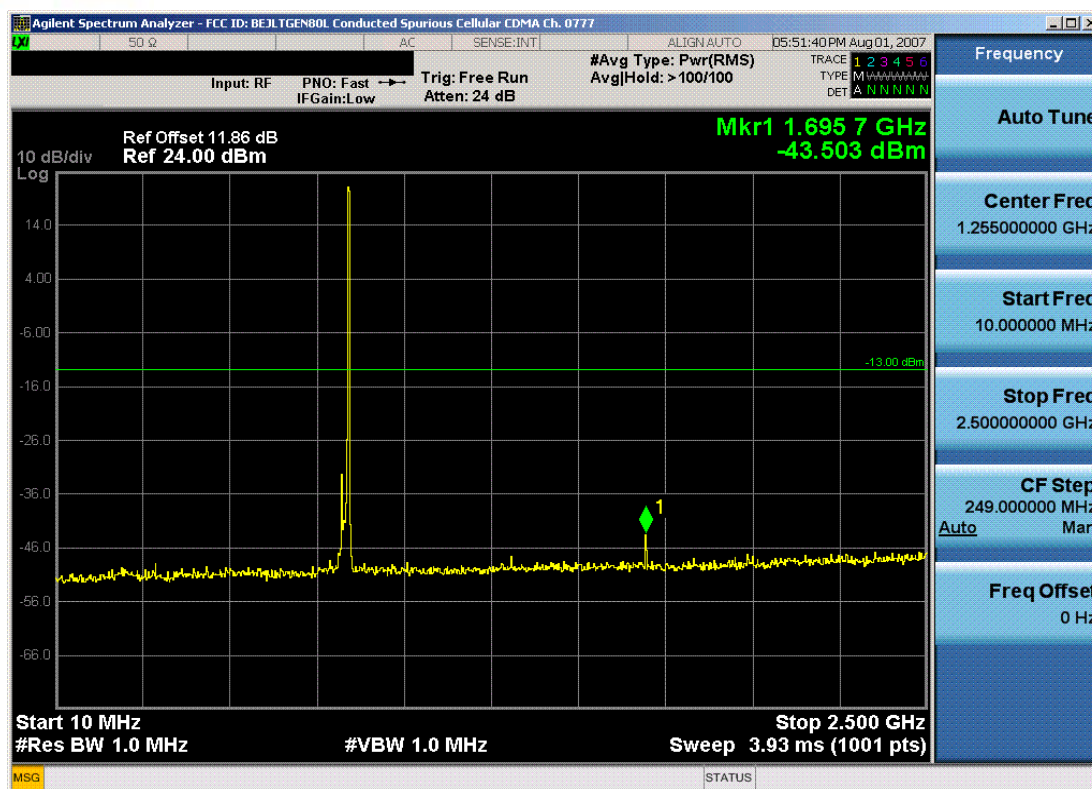

Plot 7-23. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

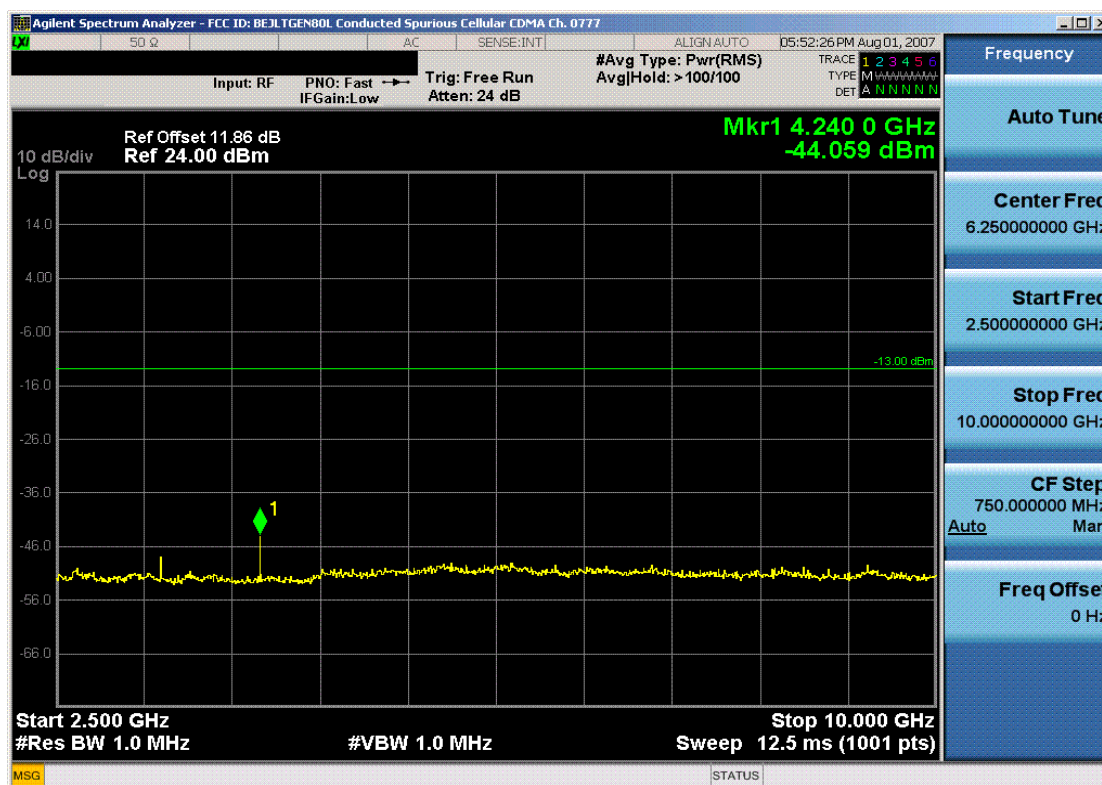

Plot 7-24. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: BEJLTGEN80L	 FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth	Page 42 of 50




Plot 7-25. Band Edge Plot (Cellular CDMA Mode – Ch. 777)




Plot 7-26. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: BEJLTGEN80L	PCTEST wires	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 43 of 50

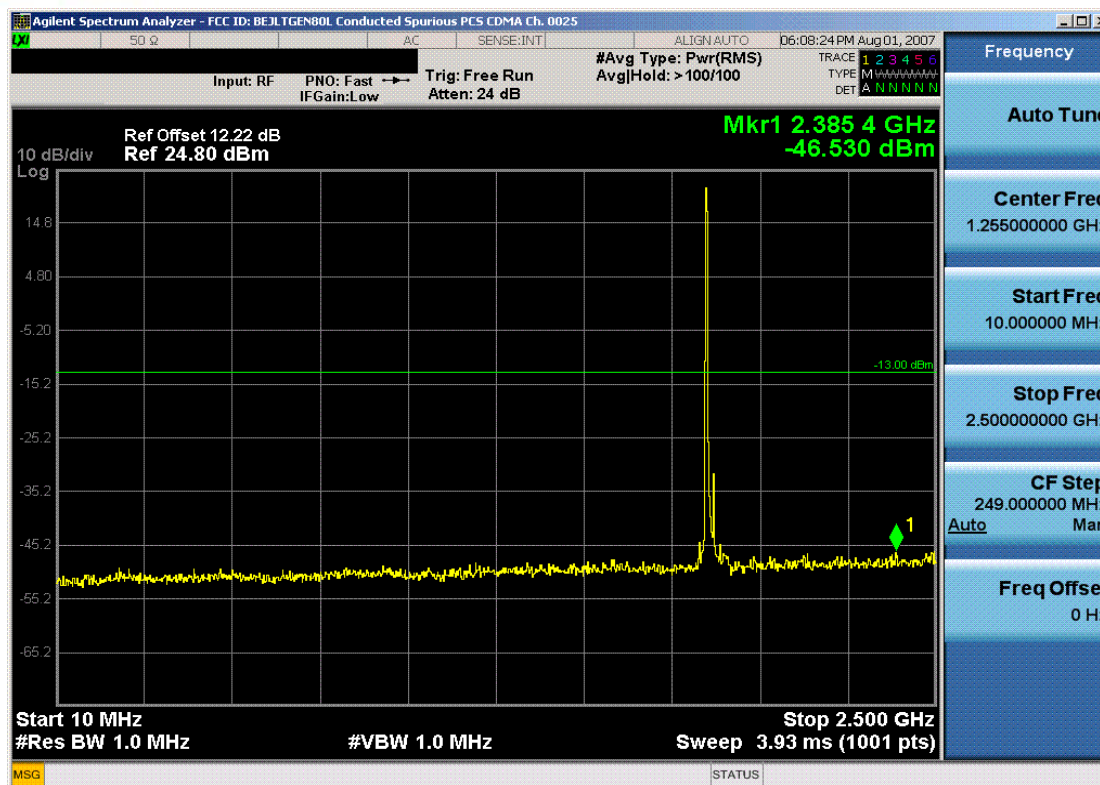


Plot 7-27. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

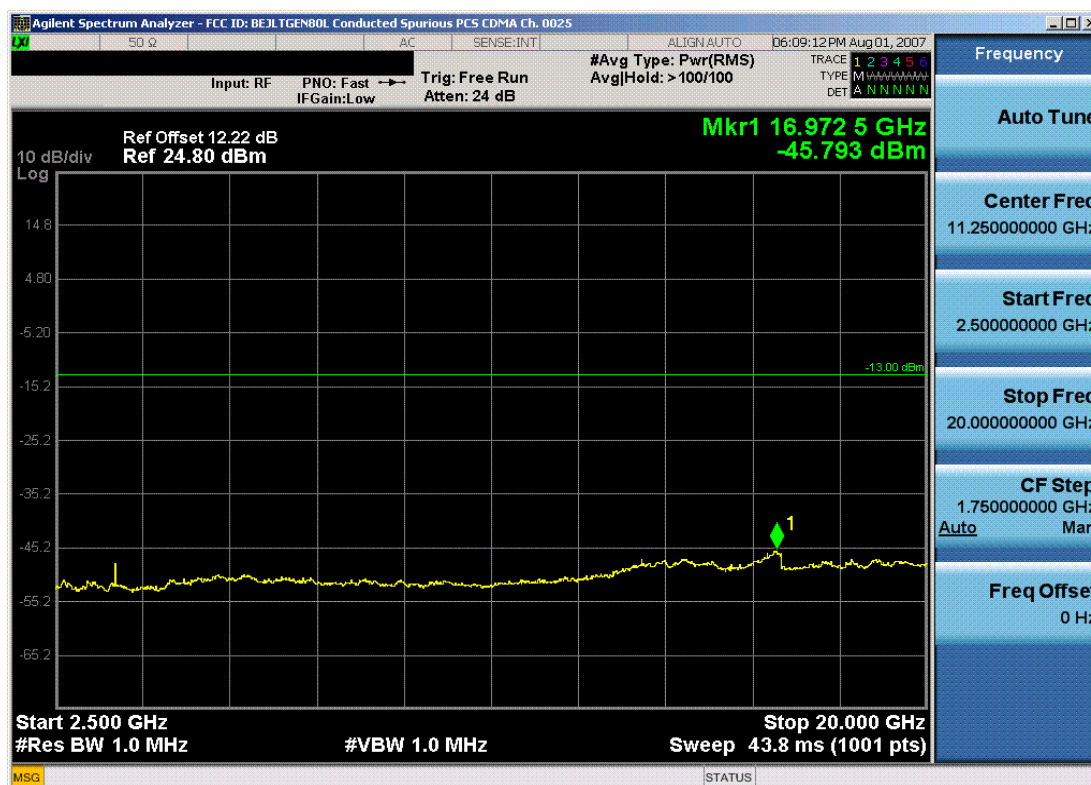


Plot 7-28. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 44 of 50

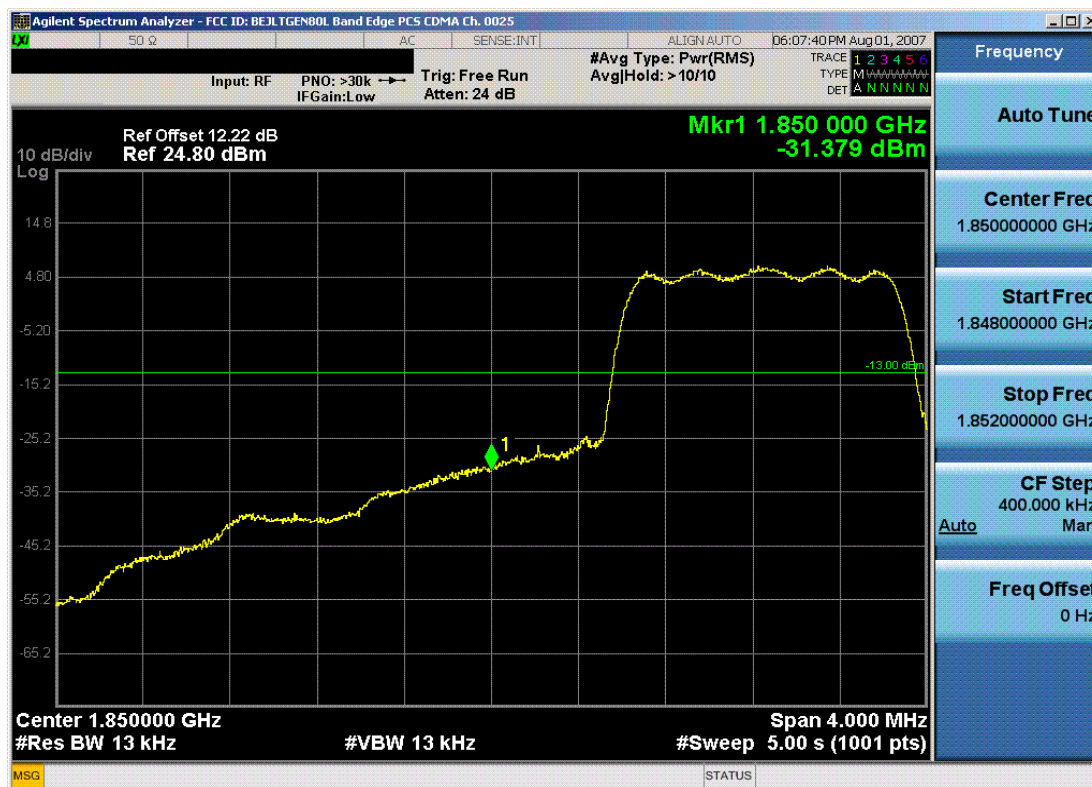


Plot 7-29. Band Edge Plot (PCS CDMA Mode – Ch. 25)

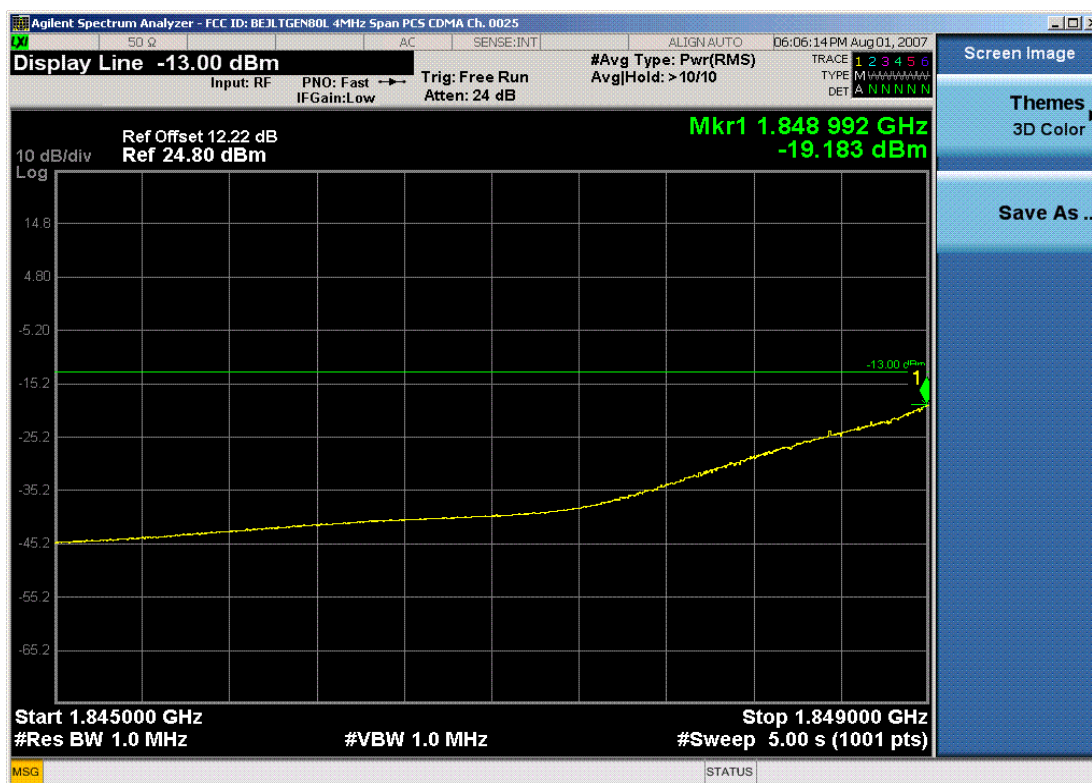


Plot 7-30. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

FCC ID: BEJLTGEN80L	PCTEST wires	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 45 of 50

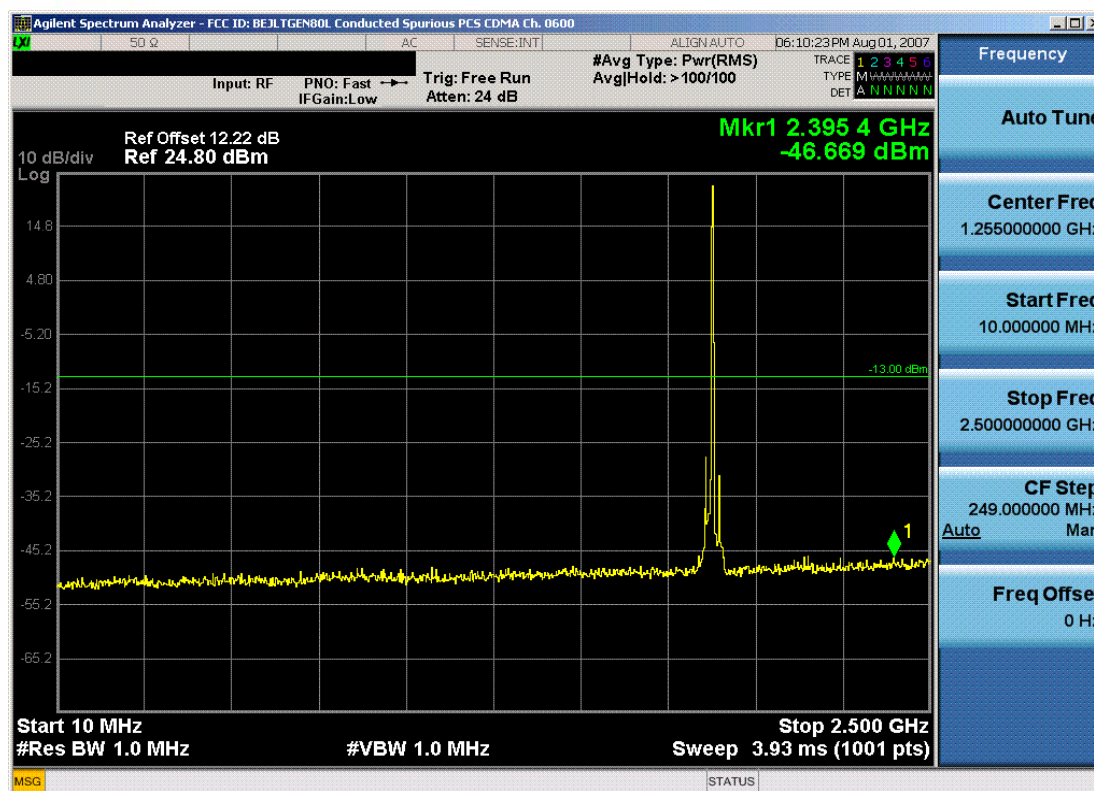


Plot 7-31. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

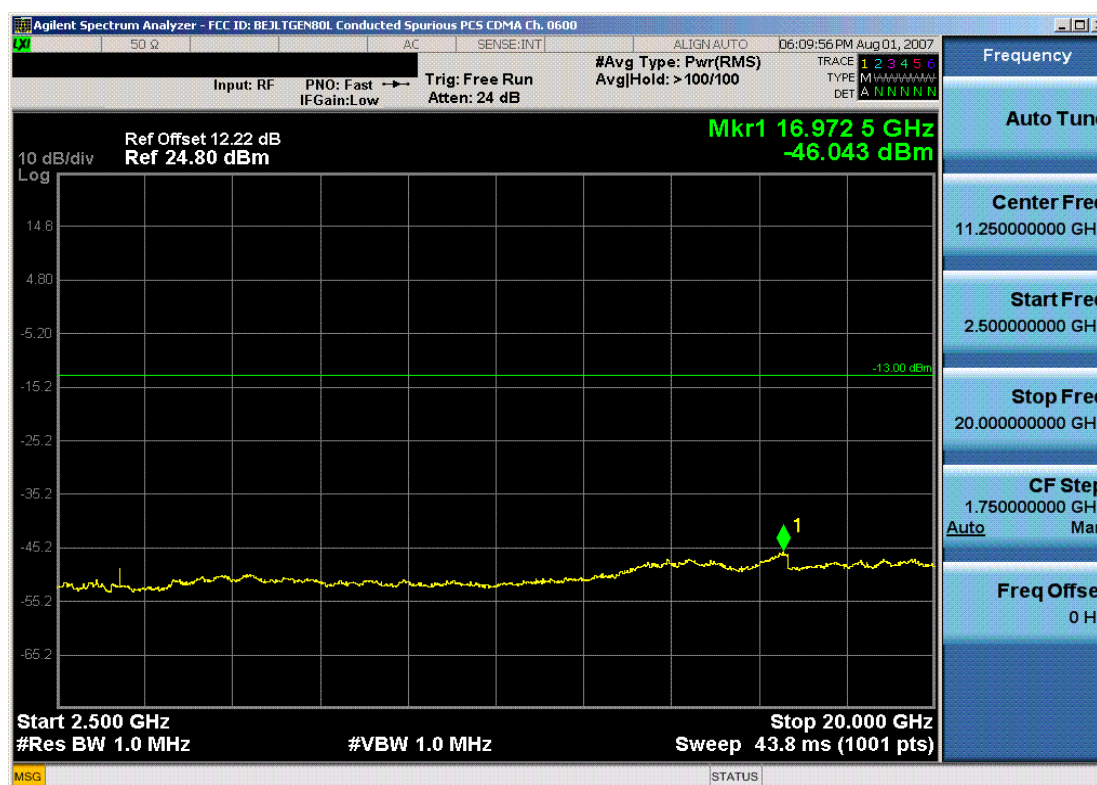


Plot 7-32. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 46 of 50

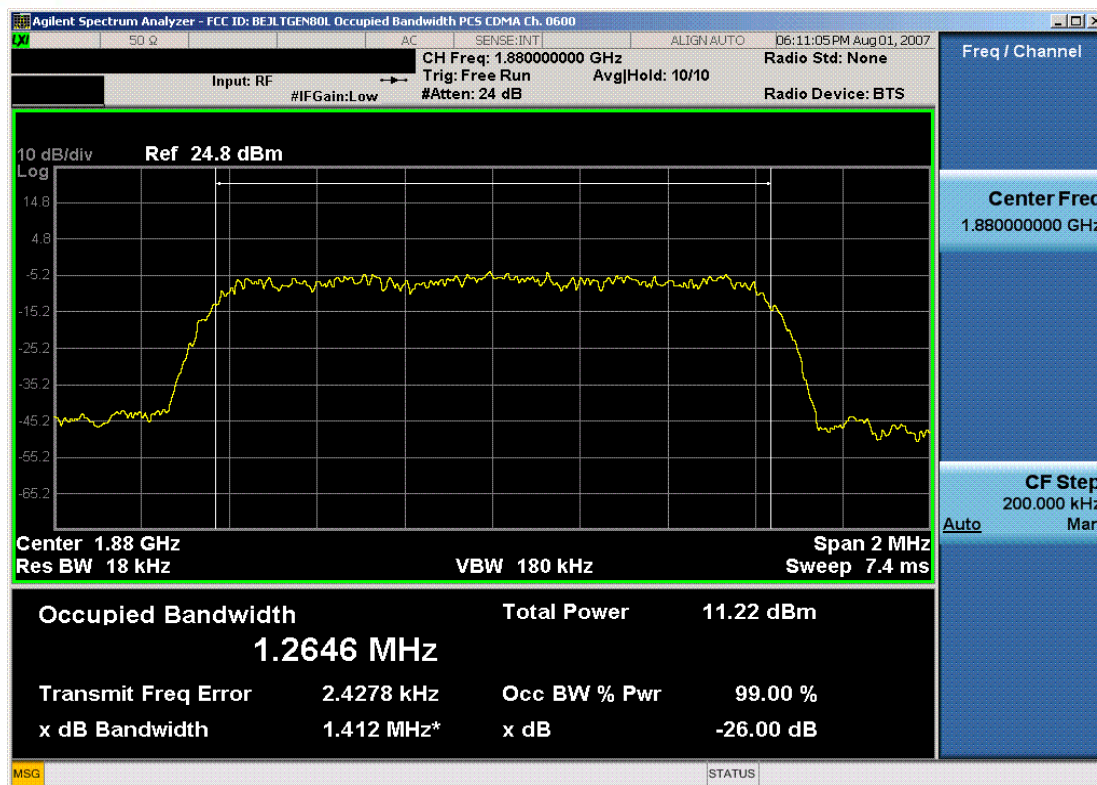


Plot 7-33. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

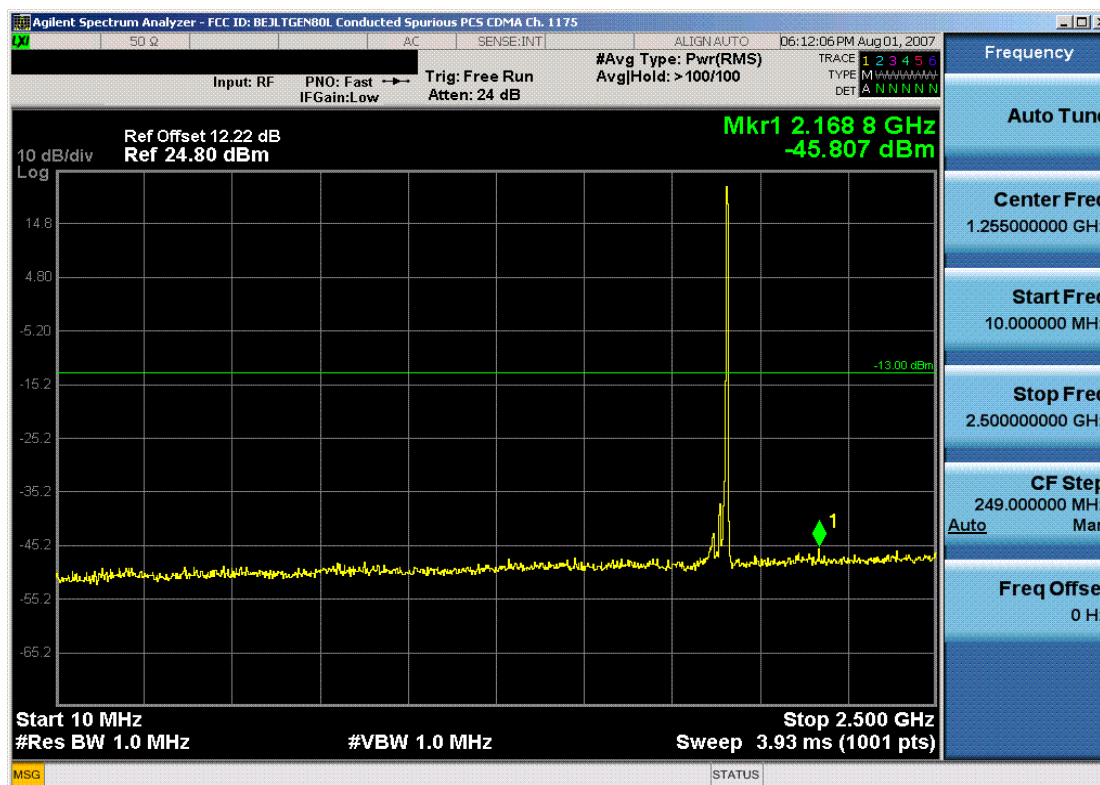

Plot 7-34. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: BEJLTGEN80L	PCTEST w i r e l e s s	FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 47 of 50

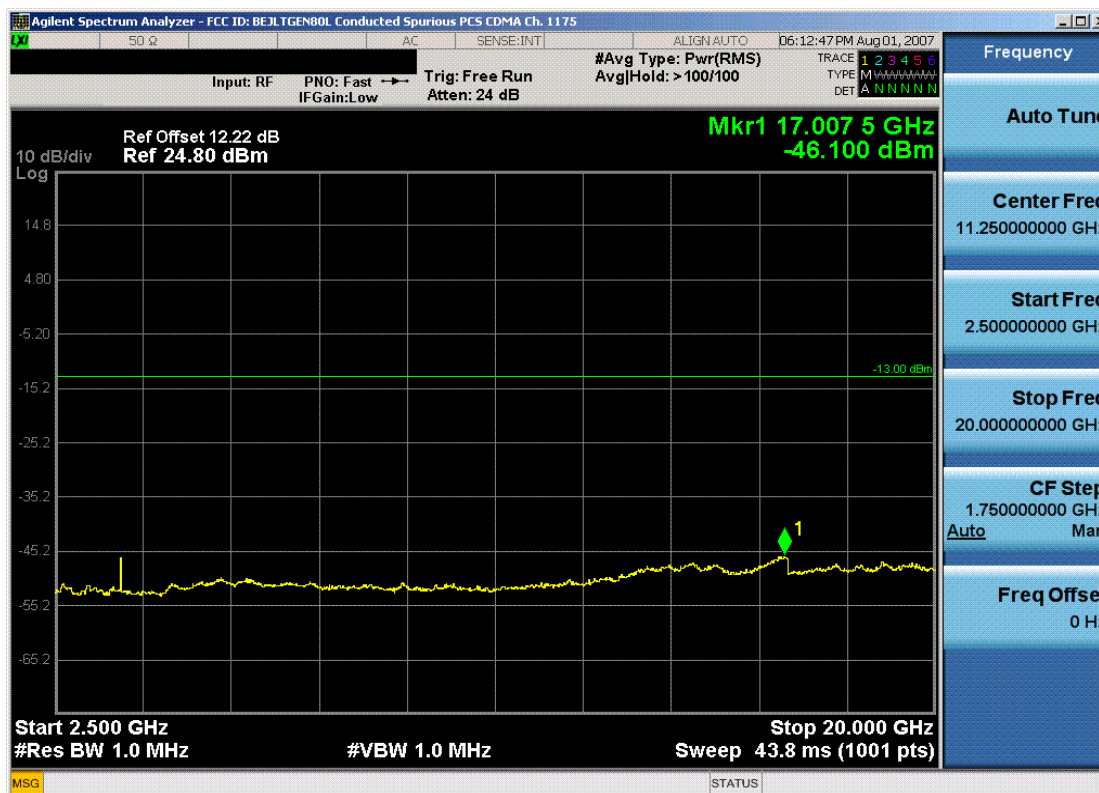


Plot 7-35. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)



Plot 7-36. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: BEJLTGEN80L		 FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 48 of 50

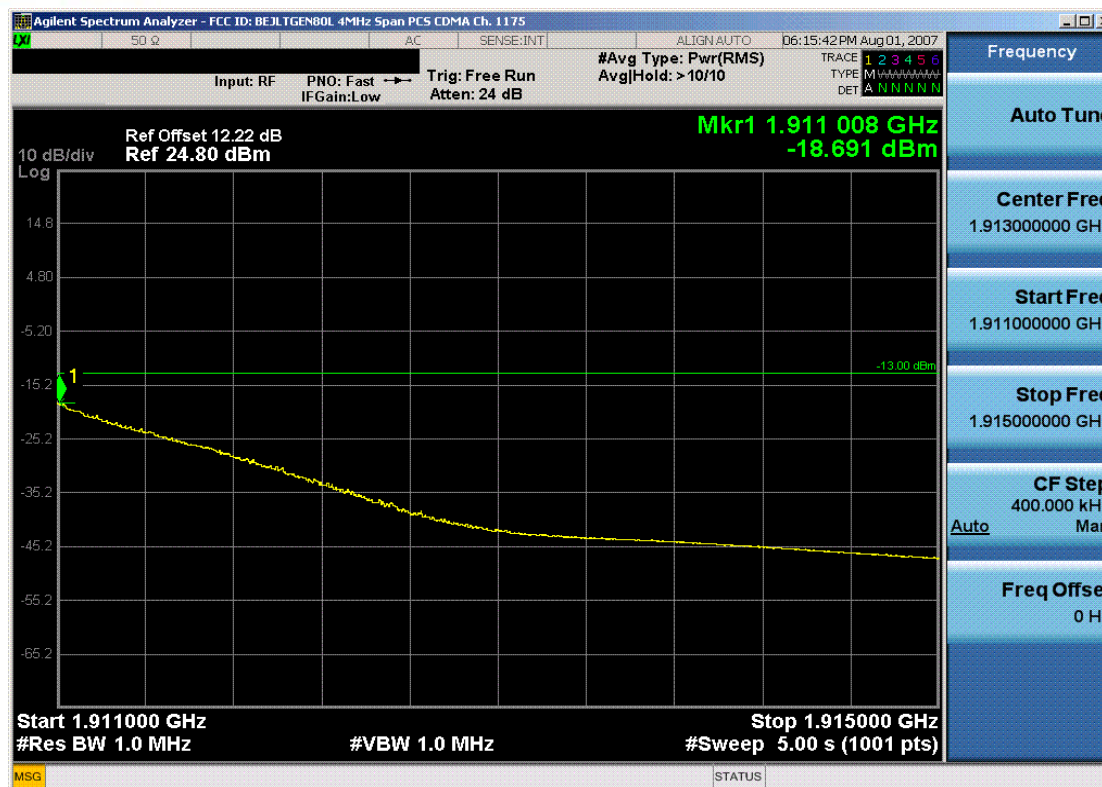

Plot 7-37. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: BEJLTGEN80L	 FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth	Page 49 of 50

8.0 CONCLUSION

The data collected shows that the **LGE Cellular/PCS AMPS/CDMA Transceiver with Bluetooth FCC ID: BEJLTGEN80L** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

FCC ID: BEJLTGEN80L		FCC Pt. 22/24 AMPS / CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0707240761.BEJ	Test Dates: August 1 - 3, 2007	EUT Type: Cellular/PCS AMPS/CDMA Transceiver with Bluetooth		Page 50 of 50