

# HCT CO., LTD.

## CERTIFICATE OF COMPLIANCE FCC Certification

**Applicant Name:**  
LG Electronics Inc.

**Address:**  
19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si,  
Gyeonggi-do 451-713, Korea

**Date of Issue:**

November 14, 2012

**Test Site/Location:**

HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,  
Icheon-si, Kyunggi-Do, Korea

**Report No.:** HCTR1210FR10-3

**HCT FRN:** 0005866421

**FCC ID:** BEJLTTTC10F

**APPLICANT:** LG Electronics Inc.

**FCC Model(s):** TC10AN3FU  
**EUT Type:** CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN  
**FCC Classification:** PCS Licensed Transmitter (PCB)  
**FCC Rule Part(s):** §22, §24, §2  
**Tx Frequency:** 824.70 — 848.31 MHz (CDMA)  
 1 851.25 — 1 908.75 MHz (PCS CDMA)  
**Rx Frequency:** 869.70 — 893.31 MHz (CDMA)  
 1 931.25 — 1 988.75 MHz (PCS CDMA)  
**Max. Conducted Power:** 0.299 W CDMA (24.76 dBm)/ 0.293 W PCS CDMA (24.67 dBm)  
 0.303 W CDMA EVDO (24.81 dBm)/ 0.286 W PCS EVDO (24.57 dBm)  
**Emission Designator(s):** 1M28F9W (CDMA), 1M29F9W (PCS CDMA),  
 1M27F9W (CDMA EVDO), 1M28F9W (PCS CDMA EVDO)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

  
**Report prepared by**  
**: Jae Chul Shin**  
**Test engineer of RF Team**

  
**Approved by**  
**: Sang Jun Lee**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTTTC10F                           |

## Version

| TEST REPORT NO. | DATE              | DESCRIPTION                                                                                                                                                                                                                                                                             |
|-----------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HCTR1210FR10    | October 05, 2012  | - First Approval Report                                                                                                                                                                                                                                                                 |
| HCTR1210FR10-1  | October 26, 2012  | - Corrected the ERP Sample calculation on page 14.<br>- Corrected the unit of the antenna gain and EIRP in section 7.7                                                                                                                                                                  |
| HCTR1210FR10-2  | November 01, 2012 | -Corrected the EUT type.                                                                                                                                                                                                                                                                |
| HCTR1210FR10-3  | November 14, 2012 | - Corrected the Max. RF Output Power on page 1 and 4.<br>- Corrected the unit of the antenna gain in the ERP Sample calculation table on page 14.<br>- Corrected the table for the spurious emissions of CDMA band on page 20.<br>- Added information about the plot offsets on page 9. |

# Table of Contents

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| 1. GENERAL INFORMATION .....                                          | 4  |
| 2. INTRODUCTION .....                                                 | 5  |
| 2.1. EUT DESCRIPTION.....                                             | 5  |
| 2.2. MEASURING INSTRUMENT CALIBRATION.....                            | 5  |
| 2.3. TEST FACILITY .....                                              | 5  |
| 3. DESCRIPTION OF TESTS .....                                         | 6  |
| 3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER..... | 6  |
| 3.2 PEAK- TO- AVERAGE RATIO .....                                     | 7  |
| 3.3 OCCUPIED BANDWIDTH. ....                                          | 8  |
| 3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....          | 9  |
| 3.5 RADIATED SPURIOUS AND HARMONIC EMISSIONS.....                     | 10 |
| 3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....      | 11 |
| 4. LIST OF TEST EQUIPMENT .....                                       | 12 |
| 5. SUMMARY OF TEST RESULTS .....                                      | 13 |
| 6. SAMPLE CALCULATION .....                                           | 14 |
| 7. TEST DATA .....                                                    | 15 |
| 7.1 CONDUCTED OUTPUT POWER.....                                       | 15 |
| 7.2 PEAK-TO-AVERAGE RATIO .....                                       | 16 |
| 7.3 OCCUPIED BANDWIDTH .....                                          | 16 |
| 7.4 CONDUCTED SPURIOUS EMISSIONS .....                                | 17 |
| 7.4.1 Band Edge .....                                                 | 17 |
| 7.5 EFFECTIVE RADIATED POWER OUTPUT .....                             | 18 |
| 7.6 EQUIVALENT ISOTROPIC RADIATED POWER.....                          | 19 |
| 7.7 RADIATED SPURIOUS EMISSIONS .....                                 | 20 |
| 7.7.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode).....                    | 20 |
| 7.7.2 RADIATED SPURIOUS EMISSIONS (PCS Mode) .....                    | 21 |
| 7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....      | 22 |
| 7.8.1 FREQUENCY STABILITY (CDMA).....                                 | 22 |
| 7.8.2 FREQUENCY STABILITY (PCS CDMA) .....                            | 23 |
| 8. TEST PLOTS.....                                                    | 24 |

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics Inc.

**Address:** 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 451-713, Korea

**FCC ID:** BEJLTC10F

**Application Type:** Certification

**FCC Classification:** PCS Licensed Transmitter (PCB)

**FCC Rule Part(s):** §22, §24, §2

**EUT Type:** CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN

**FCC Model(s):** TC10AN3FU

**Tx Frequency:** 824.70 — 848.31 MHz (CDMA)  
1 851.25 — 1 908.75 MHz (PCS CDMA)

**Rx Frequency:** 869.70 — 893.31 MHz (CDMA)  
1 931.25 — 1 988.75 MHz (PCS CDMA)

**Max. Conducted Power:** 0.299 W CDMA (24.76 dBm)/ 0.293 W PCS CDMA (24.67 dBm)  
0.303 W CDMA EVDO (24.81 dBm)/ 0.286 W PCS EVDO (24.57 dBm)

**Emission Designator(s):** 1M28F9W (CDMA), 1M29F9W (PCS CDMA),  
1M27F9W (CDMA EVDO), 1M28F9W (PCS CDMA EVDO)

**Date(s) of Tests:** September 10, 2012 ~ October 05, 2012

**Antenna Specification** Manufacturer: Laird Technologies  
Antenna type: MIMO capable vehicle dome antenna  
Peak Gain: CDMA : 1.62 dBi  
PCS CDMA : 4.55 dBi

## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The TC10AN3FU CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN consists of Cellular CDMA, PCS CDMA and EVDO Rev.0,A.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**


The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F                             |

### 3. DESCRIPTION OF TESTS

#### 3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER

##### Test Set-up

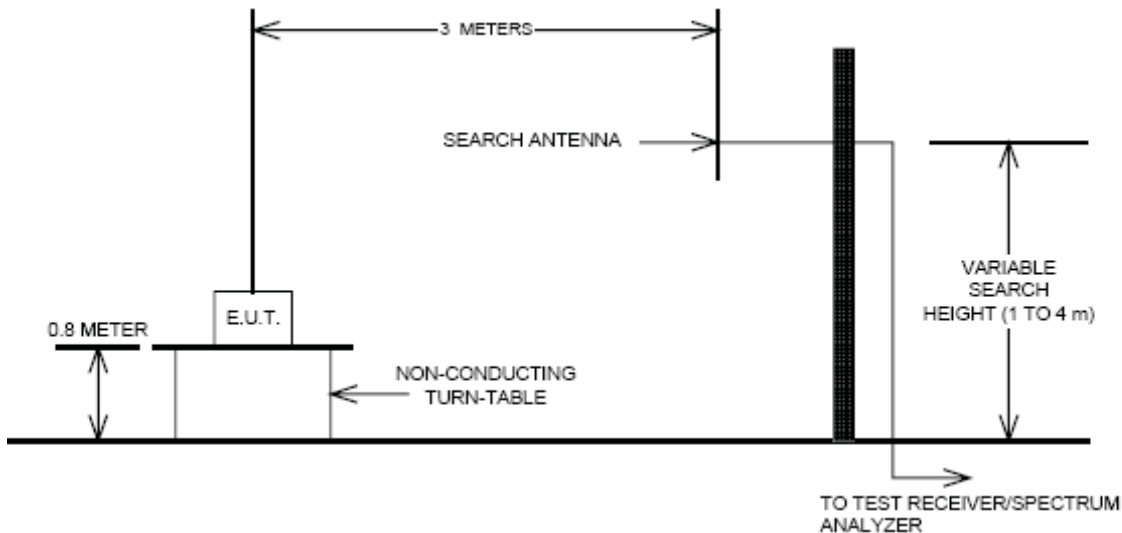

##### Test Procedure

emission measurements were performed at an Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters from the receive antenna. A turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55(CDMA) and RC1/SO55(PCS) with 'All Up' power control bits.

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F                             |

### 3.2 PEAK- TO- AVERAGE RATIO


A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function ( CCDF ) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55(CDMA) and RC1/SO55(PCS) with 'All Up' power control bits.

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F                             |

### 3.3 OCCUPIED BANDWIDTH.

#### Test set-up

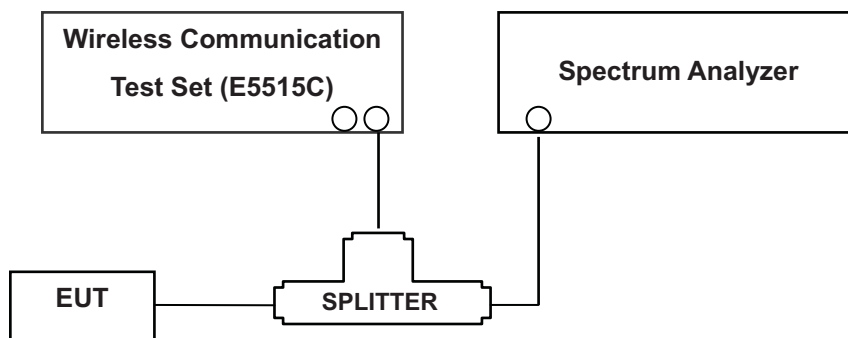

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### Test Procedure

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55(CDMA) and RC1/SO55(PCS) with 'All Up' power control bits.

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F                             |

### 3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

#### Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to < 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55(CDMA) and RC1/SO55(PCS) with 'All Up' power control bits.


**NOTES:** The analyzer plot offsets were determined by below conditions.

- For CDMA, total offset 27.2 dBm = 20 dBm attenuator + 6 dBm Divider + 1.2 dBm RF cables,
- For PCS, total offset 28.5 dBm = 20 dBm attenuator + 6 dBm Divider + 2.5 dBm RF cables.

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F                             |

### 3.5 RADIATED SPURIOUS AND HARMOMIC EMISSIONS

#### Test Set-up

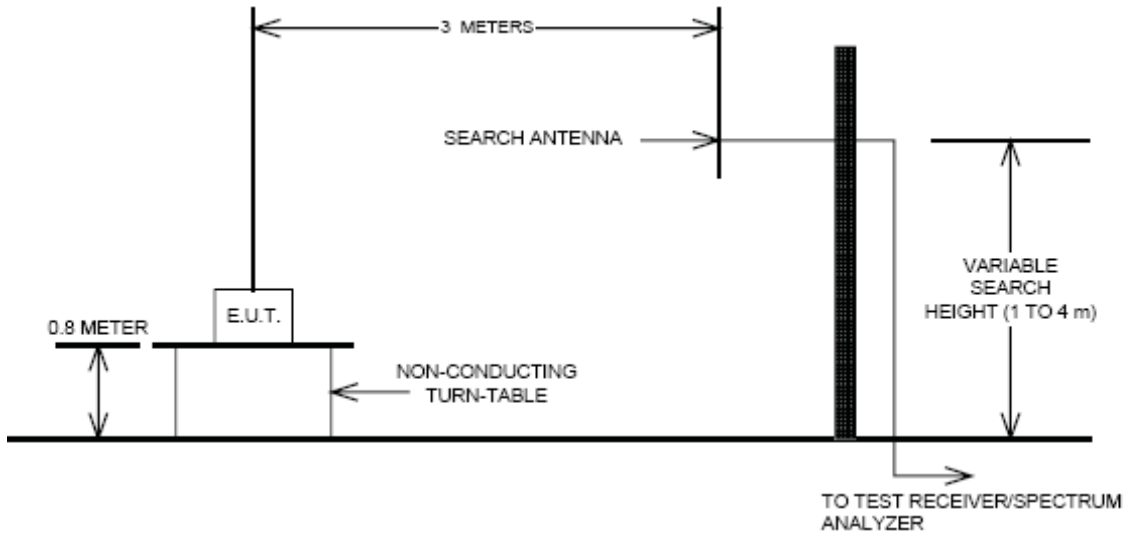

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The Fully-anechoic chamber meets requirements in ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable platform mounted at three from the antenna mast.

- 1) The unit mounted on a turntable 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10<sup>th</sup> harmonic of the fundamental frequency.

#### Test Procedure

The equipment under test is placed on a non-conductive table 3-meters from the receive antenna. A turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.


The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55(CDMA) and RC1/SO55(PCS) with 'All Up' power control bits.

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F                             |

### 3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

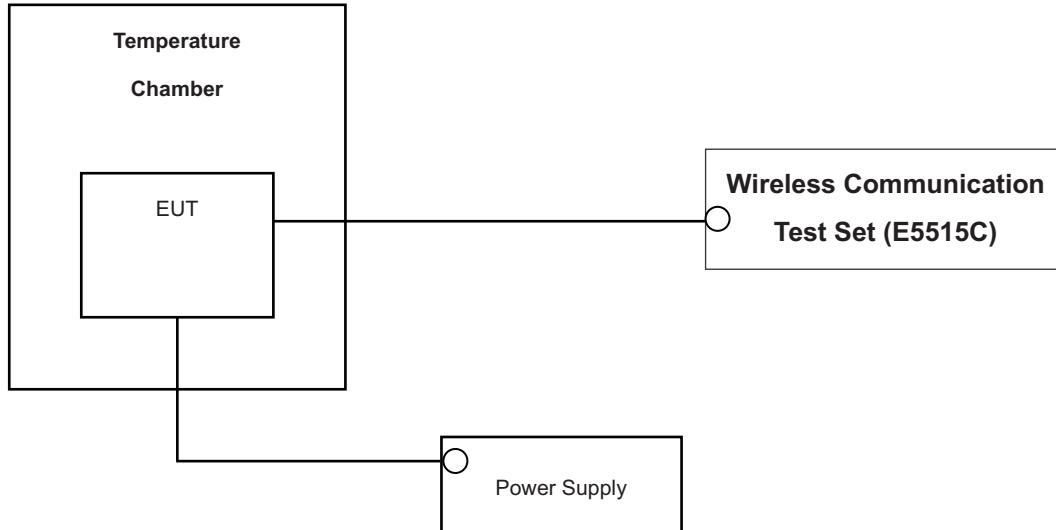

\* Nominal Operating Voltage

#### Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55(CDMA) and RC1/SO55(PCS) with ‘All Up’ power control bits.

| FCC CERTIFICATION REPORT          |                                     |                                                                | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|--------------------------------------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F                             |

## 4. LIST OF TEST EQUIPMENT

| Manufacture       | Model/ Equipment            | Serial Number          | Calibration Interval | Calibration Due |
|-------------------|-----------------------------|------------------------|----------------------|-----------------|
| Agilent           | E9327A/ Power Sensor        | MY4442009              | Annual               | 05/02/2013      |
| R&S               | CMW500/ Base Station        | 1201.0002K50_116858    | Annual               | 01/17/2013      |
| MITEQ             | AMF-6D-001180-35-20P/AMP    | 1081666                | Annual               | 09/11/2013      |
| Wainwright        | WHK1.2/15G-10EF/H.P.F       | 2                      | Annual               | 05/02/2013      |
| Wainwright        | WHK3.3/18G-10EF/H.P.F       | 1                      | Annual               | 05/02/2013      |
| Hewlett Packard   | 11667B / Power Splitter     | 10126                  | Annual               | 11/04/2012      |
| Digital           | EP-3010/ Power Supply       | 3110117                | Annual               | 11/07/2012      |
| Schwarzbeck       | UHAP/ Dipole Antenna        | 557                    | Biennial             | 03/11/2013      |
| Schwarzbeck       | UHAP/ Dipole Antenna        | 558                    | Biennial             | 03/11/2013      |
| Korea Engineering | KR-1005L / Chamber          | KRAB05063-3CH          | Annual               | 11/07/2012      |
| Schwarzbeck       | BBHA 9120D/ Horn Antenna    | 296                    | Biennial             | 02/20/2014      |
| Agilent           | E4440A/Spectrum Analyzer    | US45303008             | Annual               | 05/02/2013      |
| WEINSCHL          | ATTENUATOR                  | BR0592                 | Annual               | 11/07/2012      |
| REOHDE&SCHWARZ    | FSV40/Spectrum Analyzer     | 1307.9002K40-100931-NK | Annual               | 06/11/2013      |
| Agilent           | 8960 (E5515C)/ Base Station | GB44400269             | Annual               | 02/10/2013      |

## 5. SUMMARY OF TEST RESULTS

| FCC Part Section(s)             | Test Description                                                 | Test Limit                                                                           | Test Condition | Test Result |
|---------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------|-------------|
| 2.1049, 22.917(a),<br>24.238(a) | Occupied Bandwidth                                               | N/A                                                                                  | CONDUCTED      | PASS        |
| 2.1051, 22.917(a),<br>24.238(a) | Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | $< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions |                | PASS        |
| 2.1046                          | Conducted Output Power                                           | N/A                                                                                  |                | PASS        |
| 24.232(d)                       | Peak- to- Average Ratio                                          | $< 13 \text{ dB}$                                                                    |                | PASS        |
| 2.1055, 22.355,<br>24.235       | Frequency stability / variation of ambient temperature           | $< 2.5 \text{ ppm}$                                                                  |                | PASS        |
| 22.913(a)(2)<br>24.232(c)       | Effective Radiated Power                                         | $< 7 \text{ Watts max. ERP}$                                                         | RADIATED       | PASS        |
|                                 | Equivalent Isotropic Radiated Power                              | $< 2 \text{ Watts max. EIRP}$                                                        |                | PASS        |
| 2.1053, 22.917(a),<br>24.238(a) | Radiated Spurious and Harmonic Emissions                         | $< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of band emissions                  |                | PASS        |

## 6. SAMPLE CALCULATION

### A. ERP Sample Calculation

| Mode | Ch./ Freq. |            | Measured<br>Level(dBm) | Substitute<br>LEVEL(dBm) | Ant. Gain<br>(dBd) | C.L  | Pol. | ERP   |       |
|------|------------|------------|------------------------|--------------------------|--------------------|------|------|-------|-------|
|      | channel    | Freq.(MHz) |                        |                          |                    |      |      | W     | dBm   |
| CDMA | 384        | 836.52     | -15.49                 | 33.43                    | -10.50             | 1.67 | V    | 0.134 | 21.26 |

**ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**ERP**).

### B. Emission Designator

#### CDMA Emission Designator

**Emission Designator = 1M27F9W**

CDMA BW = 1.27 MHz (Measured at the 99% power bandwidth)

F = Frequency Modulation


9 = Composite Digital Info

W = Combination (Audio/Data)

## 7. TEST DATA

### 7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with The EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

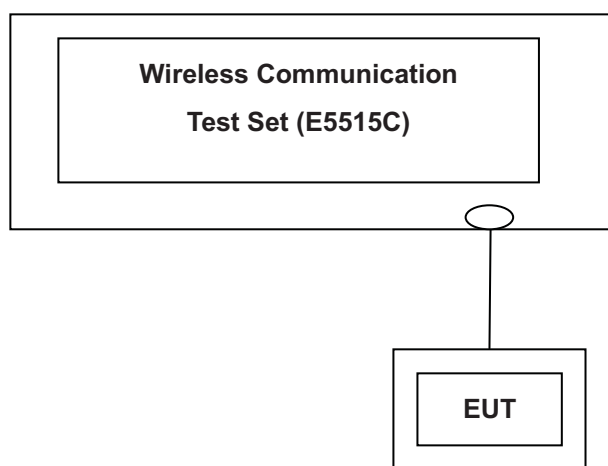

| Band | Channel | SO2            | SO2            | SO55           | SO55           | TDSO<br>SO32   | 1xEVDO<br>Rev.O | 1xEVDO<br>Rev.O | 1xEVDO<br>Rev.1 | 1xEVDO<br>Rev.1 |
|------|---------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|
|      |         | RC1/1<br>(dBm) | RC3/3<br>(dBm) | RC1/1<br>(dBm) | RC3/3<br>(dBm) | RC3/3<br>(dBm) | (FTAP)          | (RTAP)          | (FETAP)         | (RETAP)         |
| CDMA | 1013    | 24.76          | 24.74          | 24.75          | 24.73          | 24.75          | 24.80           | 24.81           | 24.79           | 24.80           |
|      | 384     | 24.64          | 24.62          | 24.63          | 24.62          | 24.62          | 24.65           | 24.67           | 24.64           | 24.62           |
|      | 777     | 24.71          | 24.66          | 24.67          | 24.63          | 24.65          | 24.65           | 24.65           | 24.64           | 24.63           |
| PCS  | 25      | 24.63          | 24.65          | 24.67          | 24.65          | 24.65          | 24.53           | 24.55           | 24.53           | 24.56           |
|      | 600     | 24.44          | 24.40          | 24.43          | 24.39          | 24.40          | 24.52           | 24.43           | 24.43           | 24.42           |
|      | 1175    | 24.41          | 24.41          | 24.40          | 24.36          | 24.38          | 24.57           | 24.55           | 24.53           | 24.54           |

(Maximum Conducted Output Powers)

Note : Detecting mode is average.

## 7.2 PEAK-TO-AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown Page 29.

## 7.3 OCCUPIED BANDWIDTH

| Band      | Channel | Frequency(MHz) | Data (MHz) |
|-----------|---------|----------------|------------|
| CDMA      | 1013    | 824.70         | 1.2820     |
|           | 384     | 836.52         | 1.2725     |
|           | 777     | 848.31         | 1.2744     |
| CDMA EVDO | 1013    | 824.70         | 1.2687     |
| PCS       | 25      | 1851.25        | 1.2693     |
|           | 600     | 1880.00        | 1.2853     |
|           | 1175    | 1908.75        | 1.2769     |
| PCS EVDO  | 600     | 1880.00        | 1.2794     |

- Plots of the EUT's Occupied Bandwidth are shown Page 25 ~ 28.

## 7.4 CONDUCTED SPURIOUS EMISSIONS

| Band | Channel | Frequency of Maximum Harmonic (GHz) | Maximum Data (dBm) |
|------|---------|-------------------------------------|--------------------|
| CDMA | 1013    | 7.000                               | -40.19             |
|      | 384     | 1.673                               | -33.85             |
|      | 777     | 1.697                               | -32.98             |
| PCS  | 25      | 3.702                               | -23.85             |
|      | 600     | 3.762                               | -22.25             |
|      | 1175    | 3.815                               | -26.95             |

- Plots of the EUT's Conducted Spurious Emissions are shown Page 38 ~ 43.

### 7.4.1 Band Edge

- Plots of the EUT's Band Edge are shown Page 30 ~ 37.

## 7.5 EFFECTIVE RADIATED POWER OUTPUT

### (CDMA Mode)

| Mode | Ch./ Freq. |            | Measured<br>Level(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant. Gain<br>(dBd) | C.L  | Pol. | ERP   |       |
|------|------------|------------|------------------------|------------------------------|--------------------|------|------|-------|-------|
|      | channel    | Freq.(MHz) |                        |                              |                    |      |      | W     | dBm   |
| CDMA | 1013       | 824.70     | -9.89                  | 39.01                        | -10.54             | 1.61 | V    | 0.485 | 26.86 |
|      | 384        | 836.52     | -10.29                 | 38.63                        | -10.50             | 1.67 | V    | 0.443 | 26.46 |
|      | 777        | 848.31     | -10.55                 | 38.51                        | -10.47             | 1.64 | V    | 0.437 | 26.40 |
| EVDO | 1013       | 824.70     | -6.85                  | 42.05                        | -10.54             | 1.61 | V    | 0.977 | 29.90 |
|      | 384        | 836.52     | -7.81                  | 41.11                        | -10.50             | 1.67 | V    | 0.783 | 28.94 |
|      | 777        | 848.31     | -8.97                  | 40.09                        | -10.47             | 1.64 | V    | 0.628 | 27.98 |

Note: Standard batteries are the only options for this phone. And a peak detector is used.

### NOTES:

#### Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in y plane in CDMA mode. Also worst case of detecting Antenna is in vertical polarization in CDMA mode.

The EVDO mode testing were performed using FETAP on Rev.A because FETAP on Rev.A is highest power in EVDO mode.

## 7.6 EQUIVALENT ISOTROPIC RADIATED POWER

### (PCS CDMA Mode)

| Mode | Ch./ Freq. |            | Measured<br>Level(dBm) | Substitute<br>LEVEL (dBm) | Ant. Gain<br>(dBi) | C.L  | Pol. | EIRP  |       |
|------|------------|------------|------------------------|---------------------------|--------------------|------|------|-------|-------|
|      | channel    | Freq.(MHz) |                        |                           |                    |      |      | W     | dBm   |
| PCS  | 25         | 1,851.25   | -12.19                 | 19.75                     | 10.23              | 1.78 | H    | 0.661 | 28.20 |
|      | 600        | 1,880.00   | -13.84                 | 18.29                     | 10.25              | 1.77 | H    | 0.475 | 26.77 |
|      | 1175       | 1,908.75   | -13.17                 | 19.03                     | 10.29              | 1.75 | H    | 0.571 | 27.57 |
| EVDO | 25         | 1,851.25   | -12.67                 | 19.27                     | 10.23              | 1.78 | H    | 0.592 | 27.72 |
|      | 600        | 1,880.00   | -14.82                 | 17.31                     | 10.25              | 1.77 | H    | 0.379 | 25.79 |
|      | 1175       | 1,908.75   | -13.18                 | 19.02                     | 10.29              | 1.75 | H    | 0.570 | 27.56 |

Note: Standard batteries are the only options for this phone. And a peak detector is used.

#### NOTES:

#### Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. And worst case of the EUT is in z plane in PCS mode. Also worst case of detecting Antenna is in horizontal in PCS mode.

The EVDO mode testing were performed using FETAP on Rev.A because FETAP on Rev.A is highest power in EVDO mode.

## 7.7 RADIATED SPURIOUS EMISSIONS

### 7.7.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode)

- ☐ MEASURED OUTPUT POWER: 29.90 dBm = 0.977 W  
☐ MODULATION SIGNAL: CDMA EVDO  
☐ DISTANCE: 3 meters  
☐ LIMIT: - (43 + 10 log10 (W)) = -42.90 dBc

| Ch.  | Freq.(MHz) | Measured Level<br>[dBm] | Ant. Gain<br>(dBd) | Substitute<br>Level<br>[dBm] | C.L  | Pol. | ERP<br>(dBm) | dBc    |
|------|------------|-------------------------|--------------------|------------------------------|------|------|--------------|--------|
| 1013 | 1,649.40   | -32.69                  | 7.54               | -41.98                       | 1.71 | H    | -36.15       | -66.05 |
|      | 2,474.10   | -50.91                  | 8.41               | -56.75                       | 2.08 | V    | -50.42       | -80.32 |
|      | 3,298.80   | -56.31                  | 9.69               | -62.45                       | 2.45 | V    | -55.21       | -85.11 |
| 384  | 1,673.04   | -31.96                  | 7.67               | -41.57                       | 1.74 | H    | -35.64       | -65.54 |
|      | 2,509.56   | -51.80                  | 8.42               | -57.77                       | 2.11 | H    | -51.46       | -81.36 |
|      | 3,346.08   | -55.37                  | 9.81               | -62.03                       | 2.48 | V    | -54.70       | -84.60 |
| 777  | 1,696.62   | -28.87                  | 7.86               | -38.29                       | 1.70 | H    | -32.13       | -62.03 |
|      | 2,544.93   | -48.36                  | 8.45               | -54.14                       | 2.13 | H    | -47.82       | -77.72 |
|      | 3,393.24   | -53.72                  | 9.94               | -60.34                       | 2.53 | V    | -52.93       | -82.83 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## 7.7.2 RADIATED SPURIOUS EMISSIONS (PCS Mode)

- ☒ MEASURED OUTPUT POWER: 28.20 dBm = 0.661 W  
☒ MODULATION SIGNAL: PCS CDMA  
☒ DISTANCE: 3 meters  
☒ LIMIT:  $-(43 + 10 \log_{10}(W)) =$  -41.20 dBc

| Ch.  | Freq.(MHz) | <u>Measured Level</u><br>[dBm] | Ant. Gain<br>(dBi) | <u>Substitute</u><br><u>Level</u><br>[dBm] | C.L  | Pol. | EIRP<br>(dBm) | dBc    |
|------|------------|--------------------------------|--------------------|--------------------------------------------|------|------|---------------|--------|
| 25   | 3,702.50   | -35.54                         | 12.50              | -40.51                                     | 2.55 | V    | -30.56        | -58.76 |
|      | 5,553.75   | -47.73                         | 13.04              | -46.80                                     | 3.17 | H    | -36.93        | -65.13 |
|      | 7,405.00   | -56.82                         | 11.10              | -45.72                                     | 3.54 | V    | -38.16        | -66.36 |
| 600  | 3,760.00   | -30.29                         | 12.54              | -34.97                                     | 2.60 | V    | -25.03        | -53.23 |
|      | 5,640.00   | -                              | -                  | -                                          | -    | -    | -             | -      |
|      | 7,520.00   | -                              | -                  | -                                          | -    | -    | -             | -      |
| 1175 | 3,817.50   | -32.91                         | 12.59              | -37.35                                     | 2.59 | V    | -27.35        | -55.55 |
|      | 5,726.25   | -55.06                         | 13.07              | -53.03                                     | 3.35 | H    | -43.31        | -71.51 |
|      | 7,635.00   | -55.92                         | 11.06              | -45.94                                     | 3.23 | V    | -38.11        | -66.31 |


- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## 7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### 7.8.1 FREQUENCY STABILITY (CDMA)

OPERATING FREQUENCY: 836,520,000 Hz  
 CHANNEL: 384  
 REFERENCE VOLTAGE: 12.0 VDC  
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


| Voltage<br>(%) | Power<br>(VDC) | Temp.<br>(℃) | Frequency<br>(Hz) | Frequency<br>Error (Hz) | Deviation<br>(%) | ppm    |
|----------------|----------------|--------------|-------------------|-------------------------|------------------|--------|
| 100%           | 12.0           | +20(Ref)     | 836 520 010       | 0                       | 0.000 000        | 0.000  |
| 100%           |                | -30          | 836 520 002       | -8.39                   | -0.000 001       | -0.010 |
| 100%           |                | -20          | 836 519 999       | -10.61                  | -0.000 001       | -0.013 |
| 100%           |                | -10          | 836 520 000       | -10.21                  | -0.000 001       | -0.012 |
| 100%           |                | 0            | 836 520 000       | -10.20                  | -0.000 001       | -0.012 |
| 100%           |                | +10          | 836 520 000       | -10.00                  | -0.000 001       | -0.012 |
| 100%           |                | +30          | 836 520 002       | -8.46                   | -0.000 001       | -0.010 |
| 100%           |                | +40          | 836 520 001       | -9.05                   | -0.000 001       | -0.011 |
| 100%           |                | +50          | 836 520 000       | -10.43                  | -0.000 001       | -0.012 |
| 115%           | 13.8           | +20          | 836 520 000       | -10.50                  | -0.000 001       | -0.013 |
| 85%            | 10.2           | +20          | 836 520 000       | -10.01                  | -0.000 001       | -0.012 |

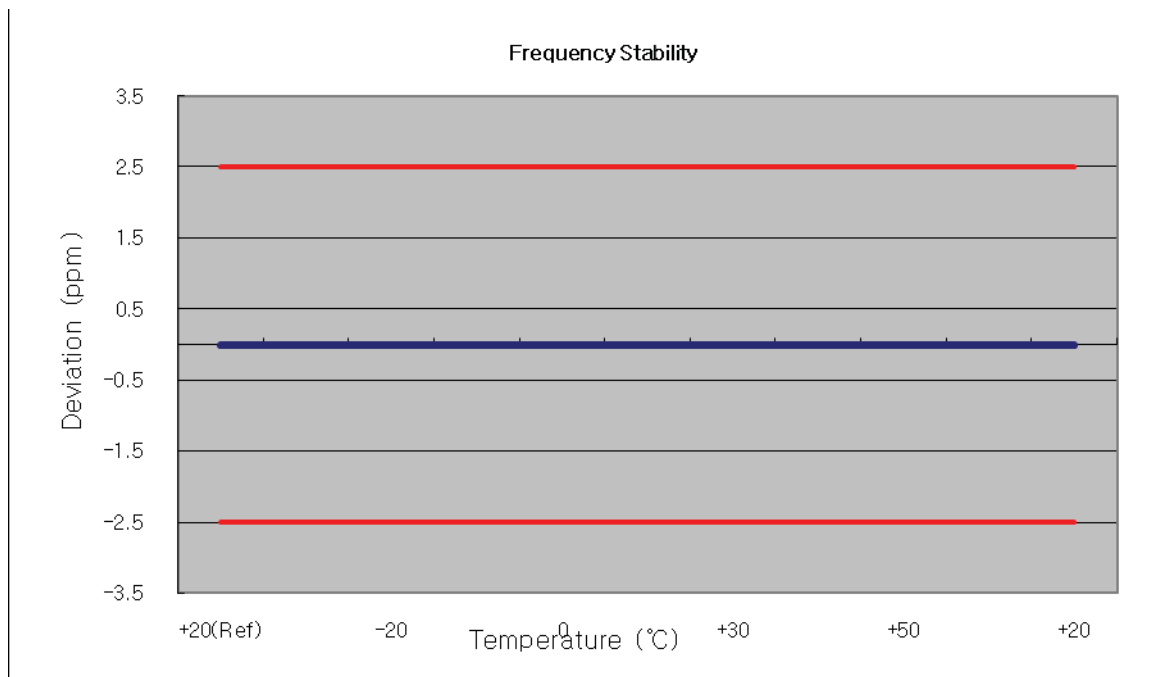

## 7.8.2 FREQUENCY STABILITY (PCS CDMA)


OPERATING FREQUENCY: 1880,000,000 Hz  
 CHANNEL: 600  
 REFERENCE VOLTAGE: 12.0 DC  
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm   |
|-------------|-------------|------------|----------------|----------------------|---------------|-------|
| 100%        | 12.0        | +20(Ref)   | 1879 999 989   | 0                    | 0.000 000     | 0.000 |
| 100%        |             | -30        | 1880 000 009   | 9.30                 | 0.000 000     | 0.005 |
| 100%        |             | -20        | 1880 000 010   | 9.90                 | 0.000 001     | 0.005 |
| 100%        |             | -10        | 1880 000 009   | 9.31                 | 0.000 000     | 0.005 |
| 100%        |             | 0          | 1880 000 009   | 8.51                 | 0.000 000     | 0.005 |
| 100%        |             | +10        | 1880 000 008   | 8.09                 | 0.000 000     | 0.004 |
| 100%        |             | +30        | 1880 000 011   | 10.68                | 0.000 001     | 0.006 |
| 100%        |             | +40        | 1880 000 009   | 9.47                 | 0.000 001     | 0.005 |
| 100%        |             | +50        | 1880 000 012   | 11.77                | 0.000 001     | 0.006 |
| 115%        | 13.8        | +20        | 1880 000 008   | 8.28                 | 0.000 000     | 0.004 |
| 85%         | 10.2        | +20        | 1880 000 007   | 7.47                 | 0.000 000     | 0.004 |

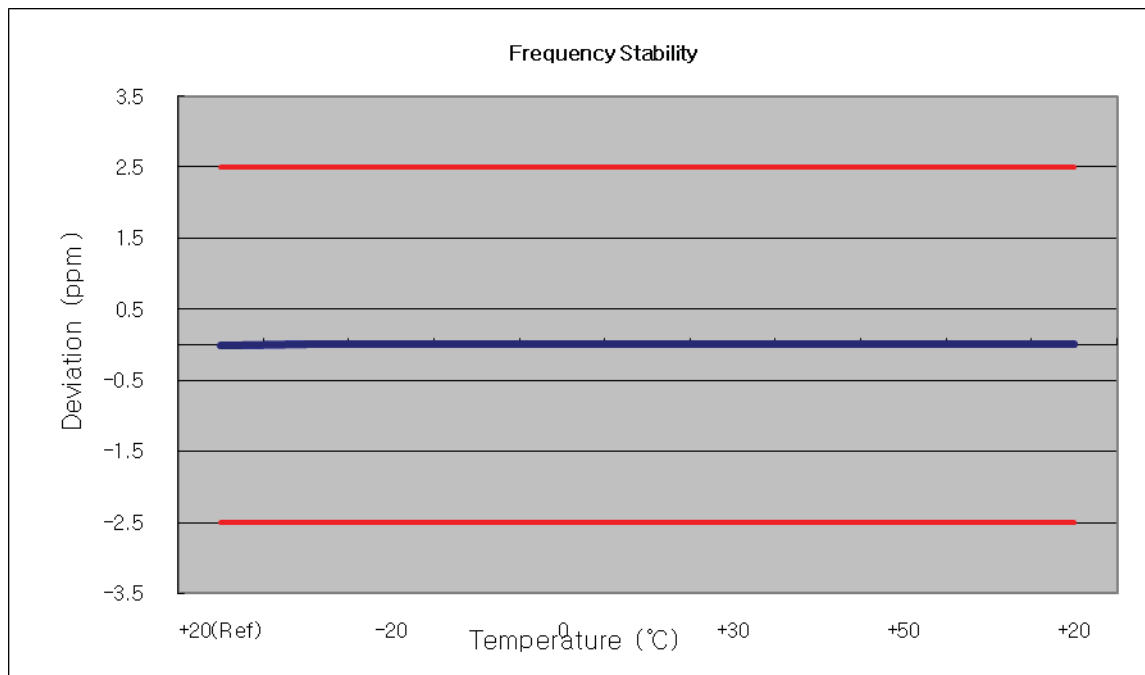


## 8. TEST PLOTS


■ CDMA MODE (1013 CH.) Occupied Bandwidth

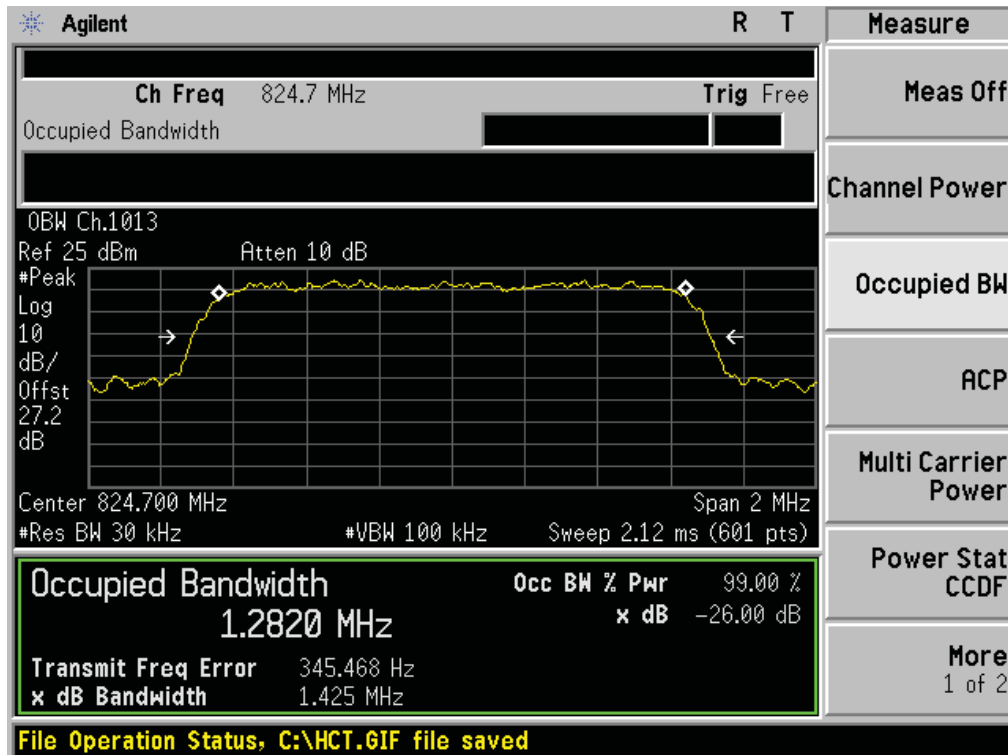


■ CDMA MODE (384 CH.) Occupied Bandwidth

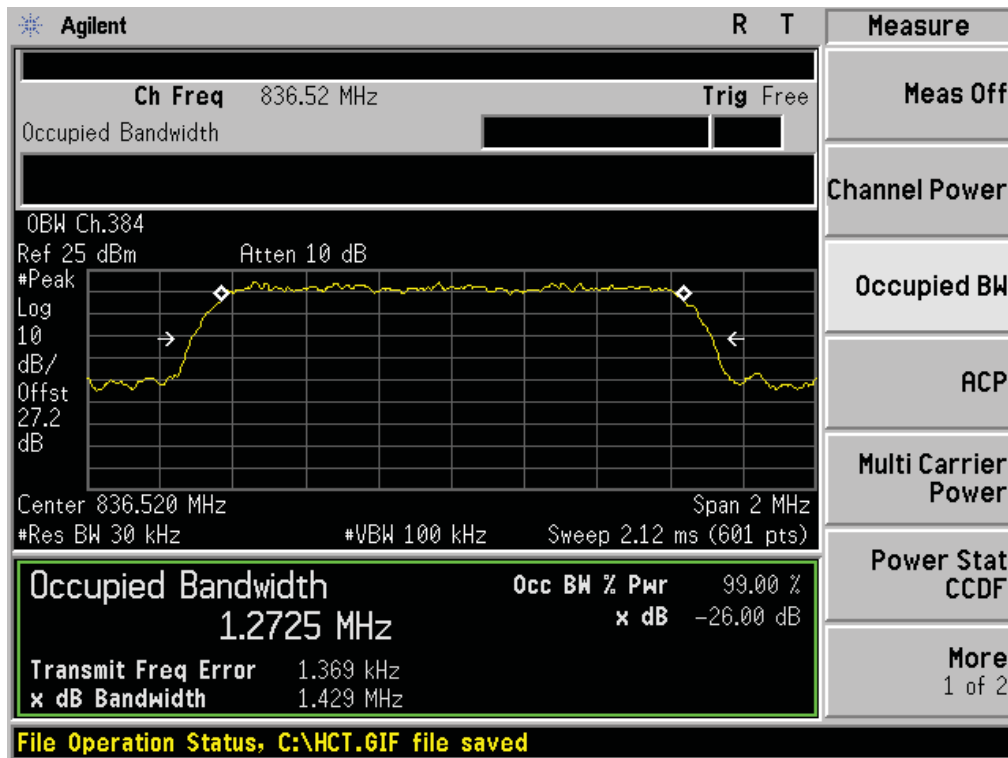


■ CDMA MODE (777 CH.) Occupied Bandwidth

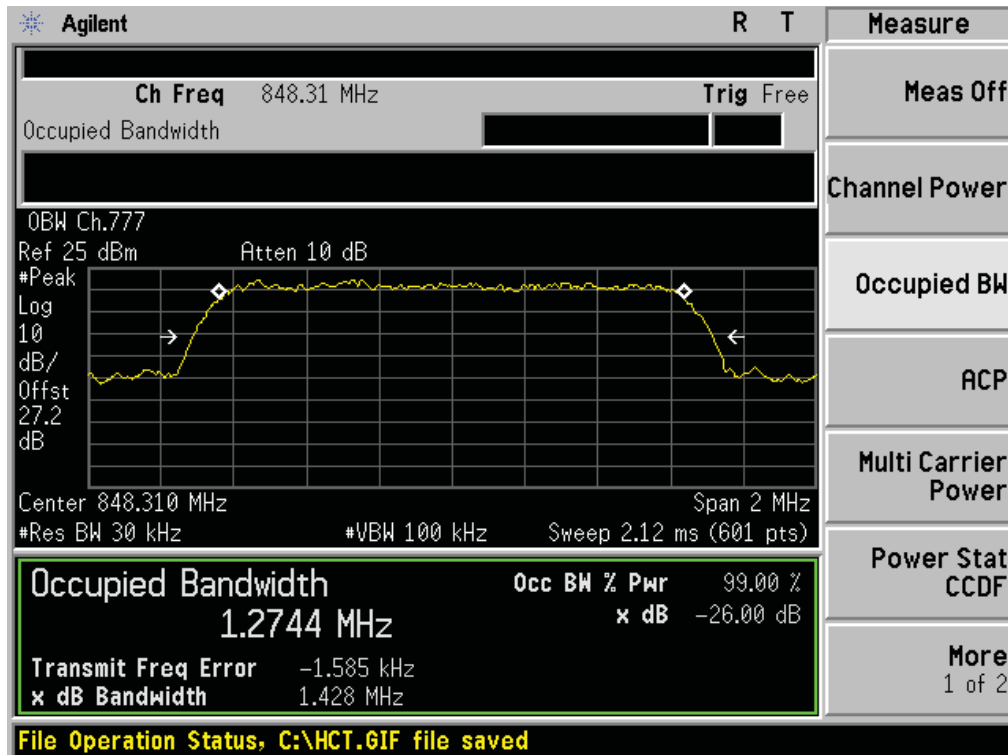


■ CDMA EVDO MODE (1013 CH.) Occupied Bandwidth

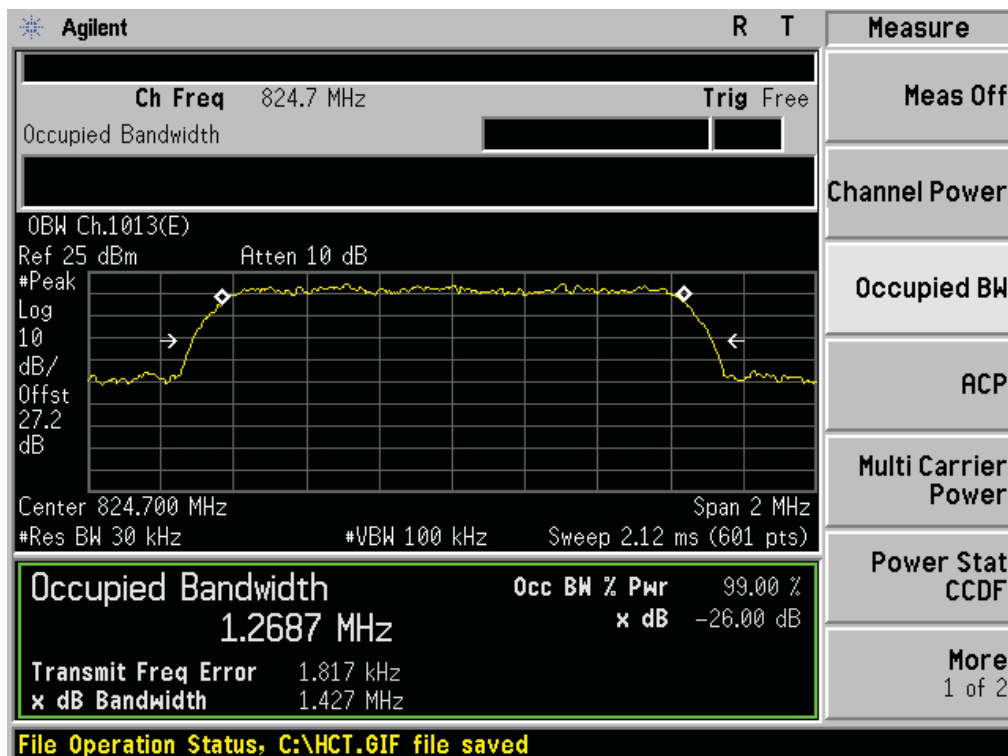


■ PCS CDMA MODE (25 CH.) Occupied Bandwidth

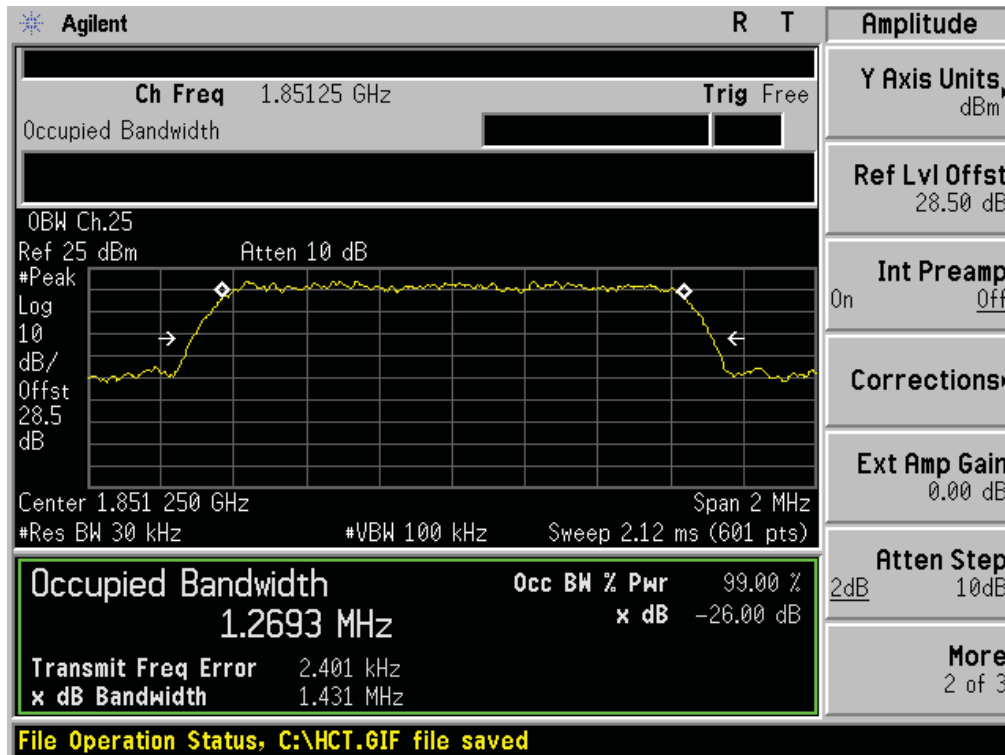


■ PCS CDMA MODE (600 CH.) Occupied Bandwidth

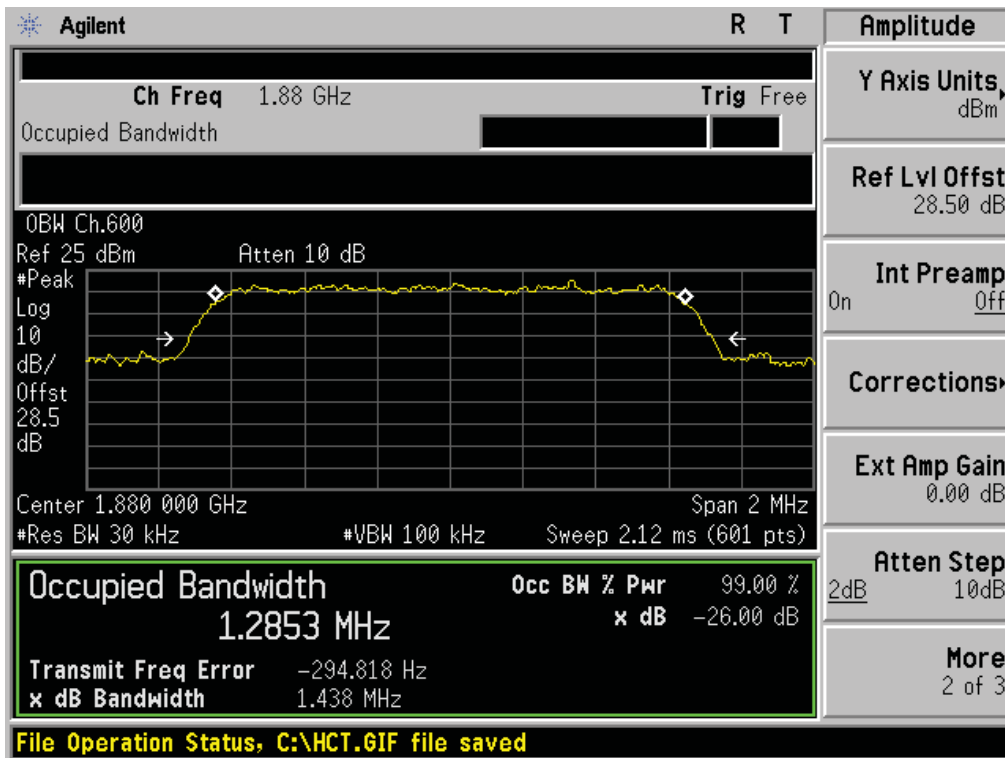


■ PCS CDMA MODE (1175 CH.) Occupied Bandwidth

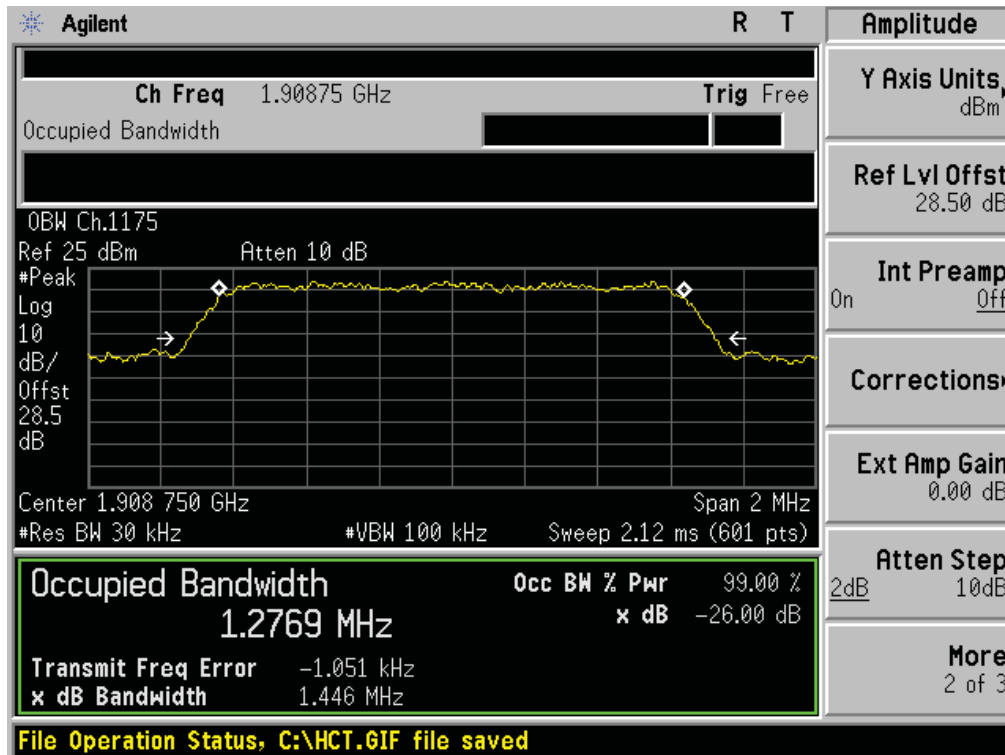


■ PCS CDMA EVDO MODE (600 CH.) Occupied Bandwidth

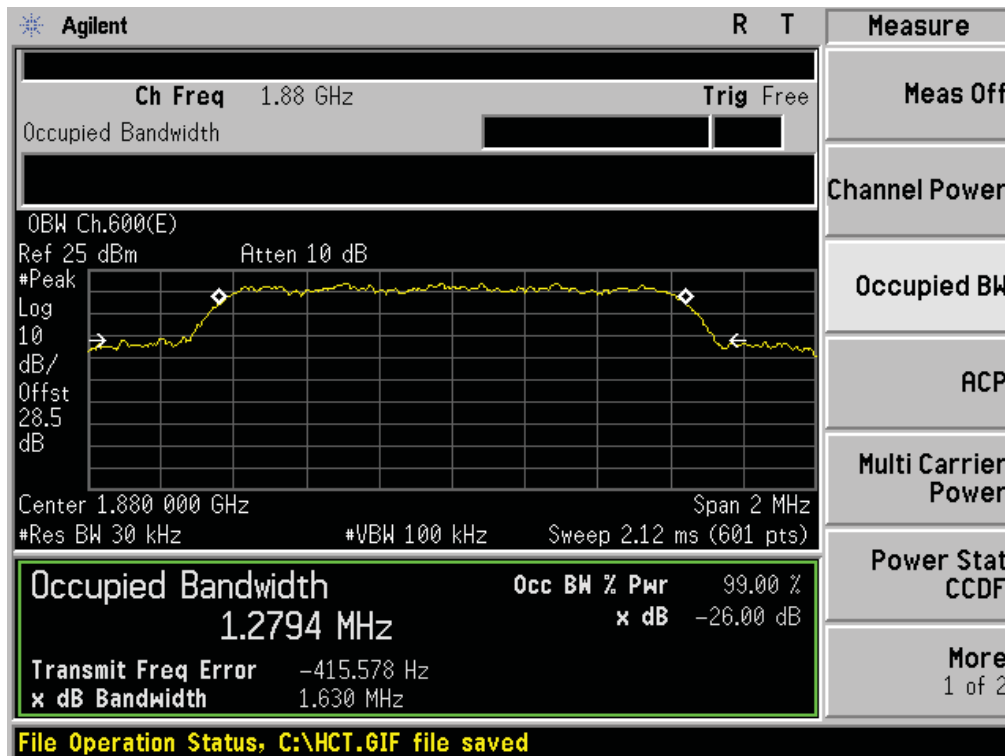


■ PCS CDMA MODE (600 CH.) Peak-to-Average Ratio

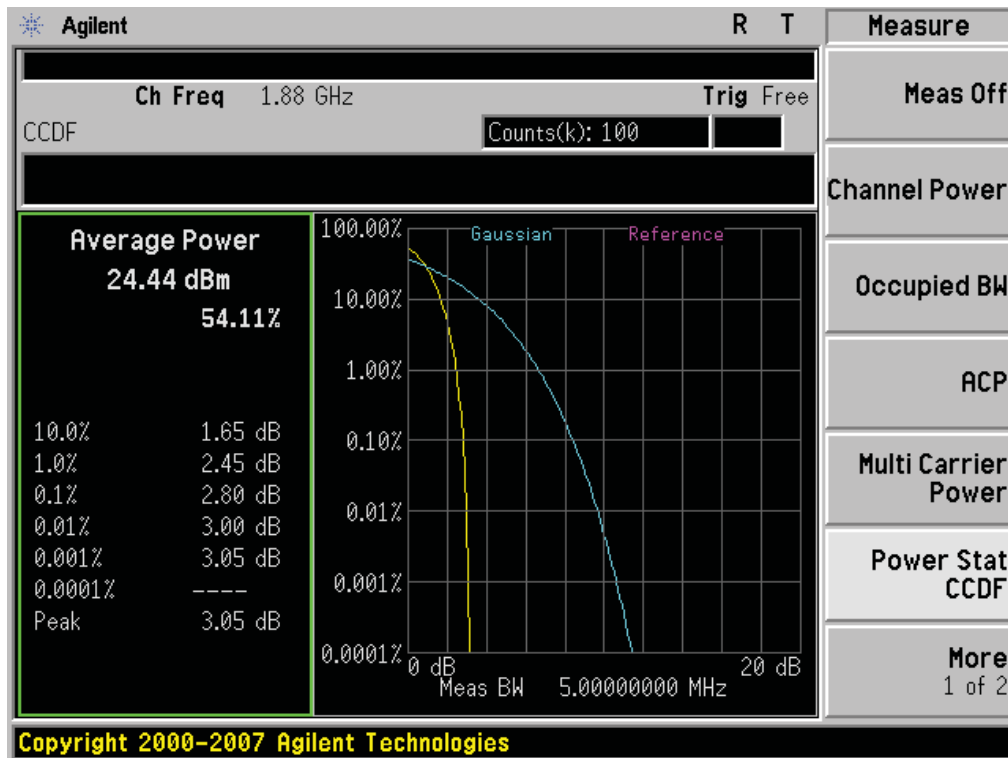


■ PCS CDMA EVDO MODE (600 CH.) Peak-to-Average Ratio

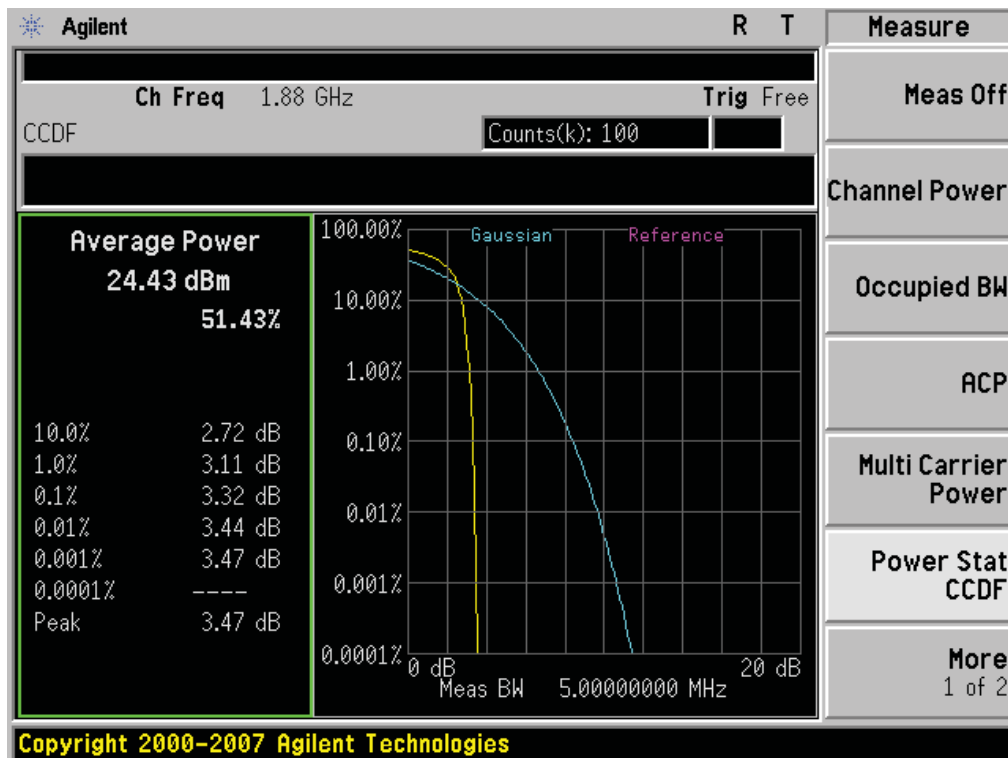


■ CDMA MODE (1013 CH.) Block Edge

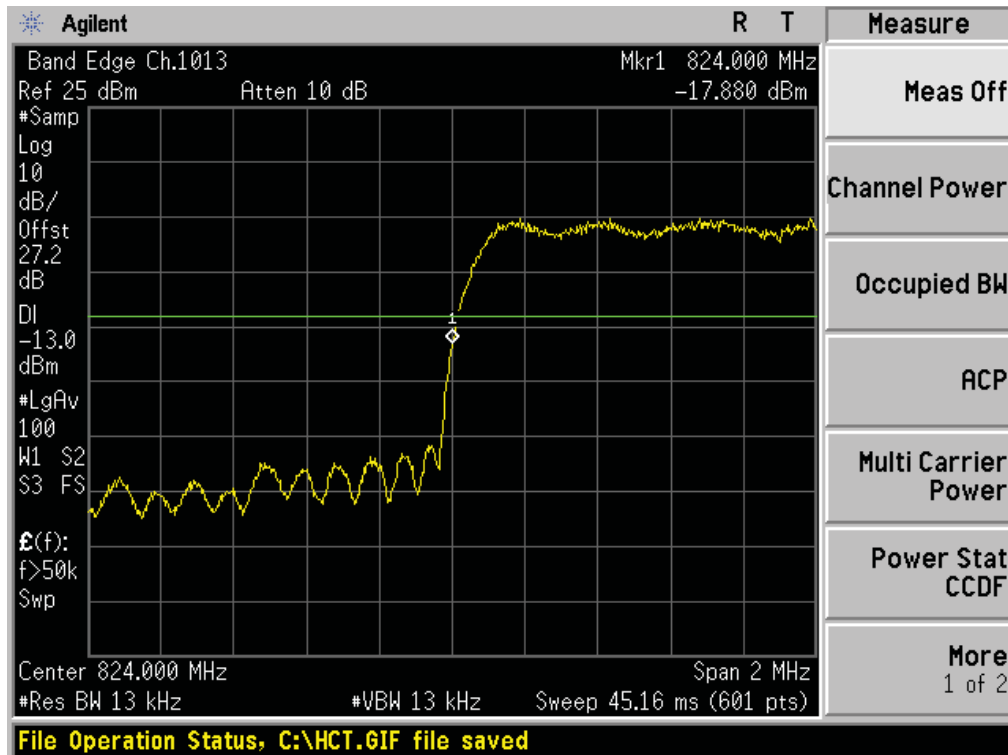


■ CDMA MODE (777 CH.) Block Edge

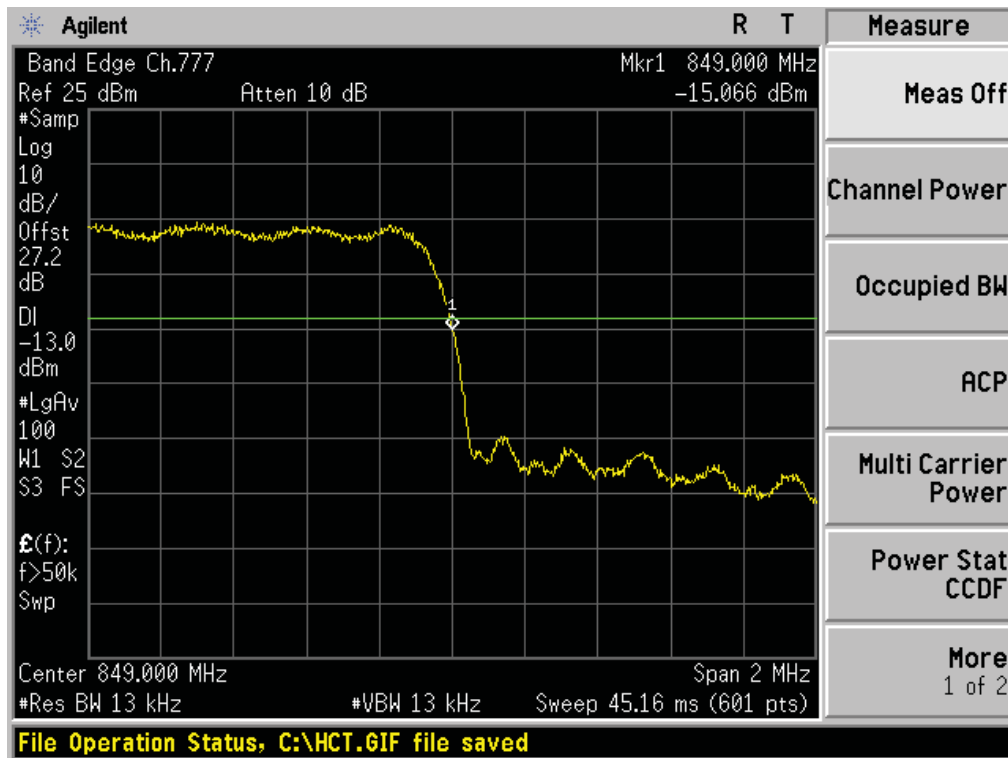


■ CDMA EVDO MODE (1013 CH.) Block Edge

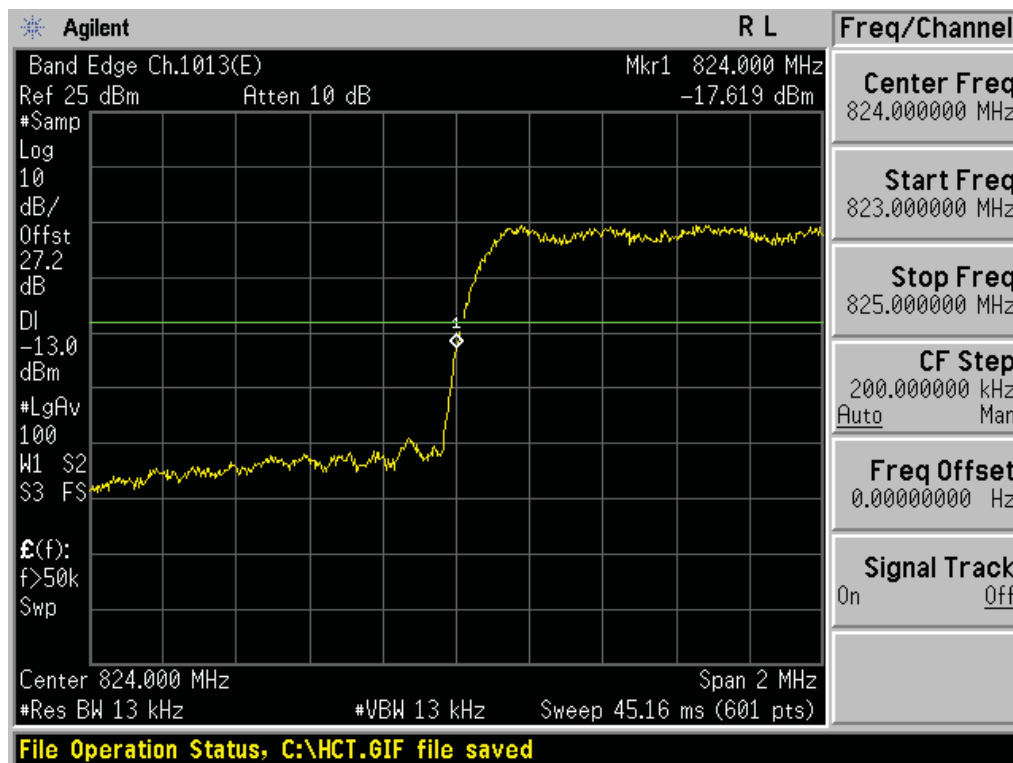


■ CDMA EVDO MODE (777 CH.) Block Edge

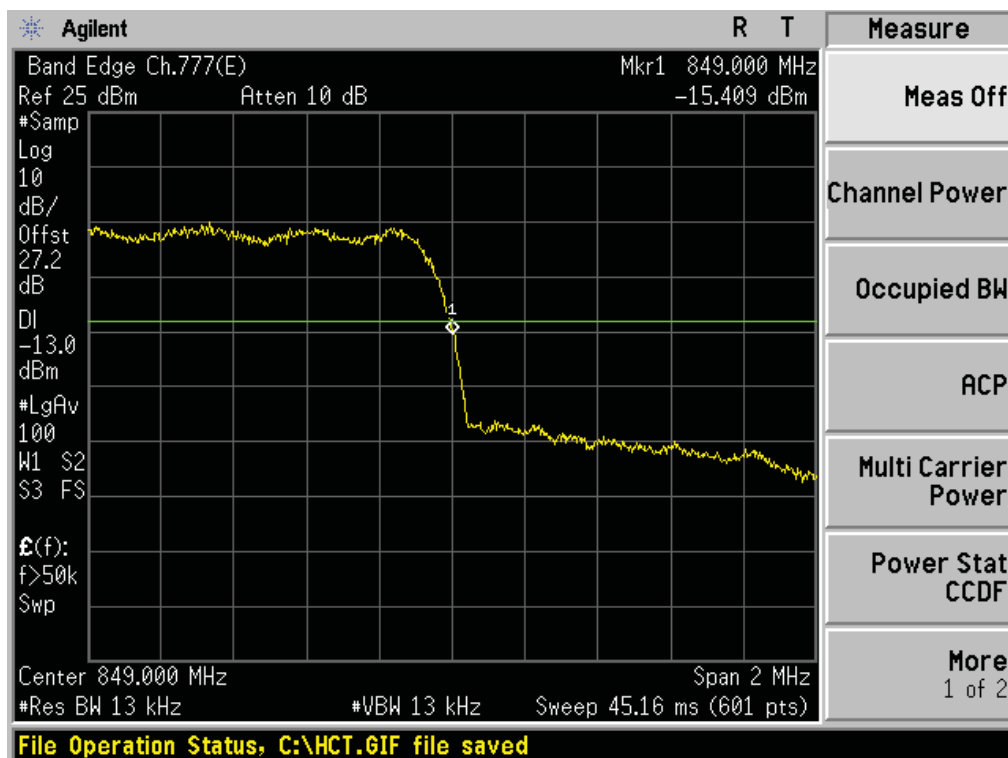


■ CDMA MODE (1013 CH.) 4 MHz Span

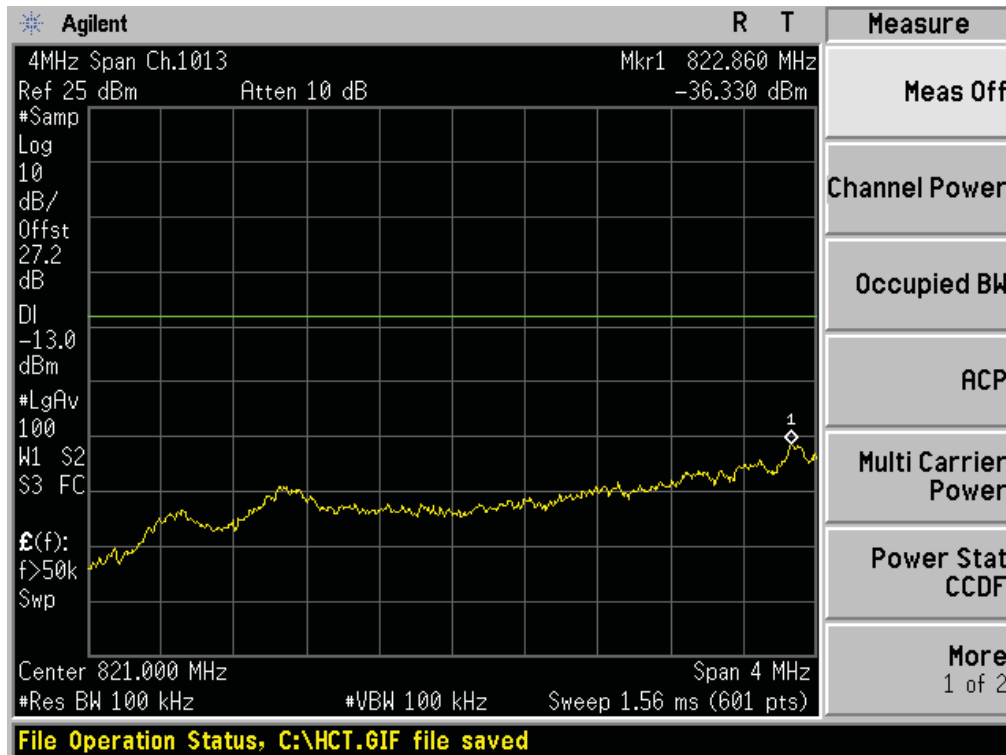


■ CDMA MODE (777 CH.) 4 MHz Span

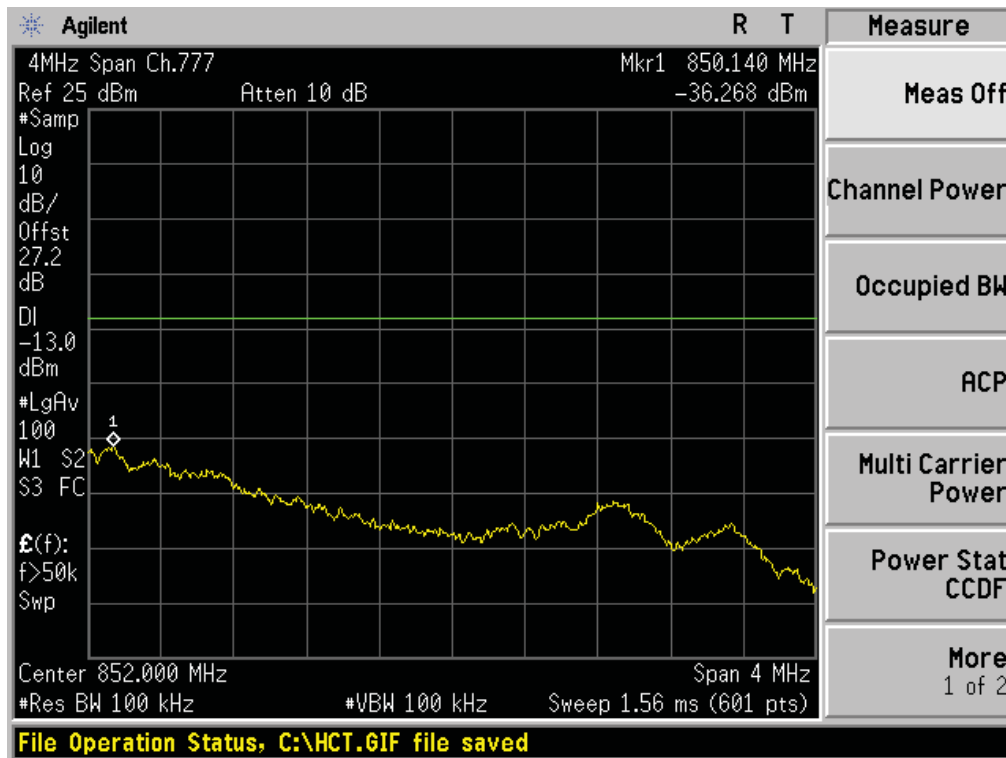


■ CDMA EVDO MODE (1013 CH.) 4 MHz Span

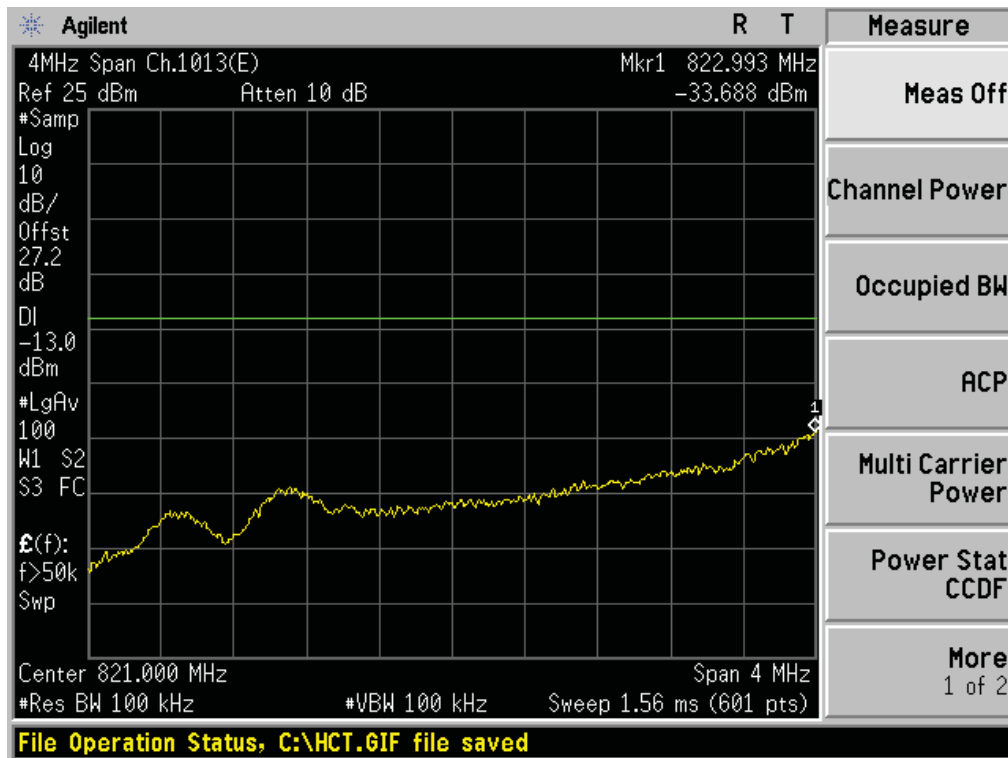


■ CDMA EVDO MODE (777 CH.) 4 MHz Span

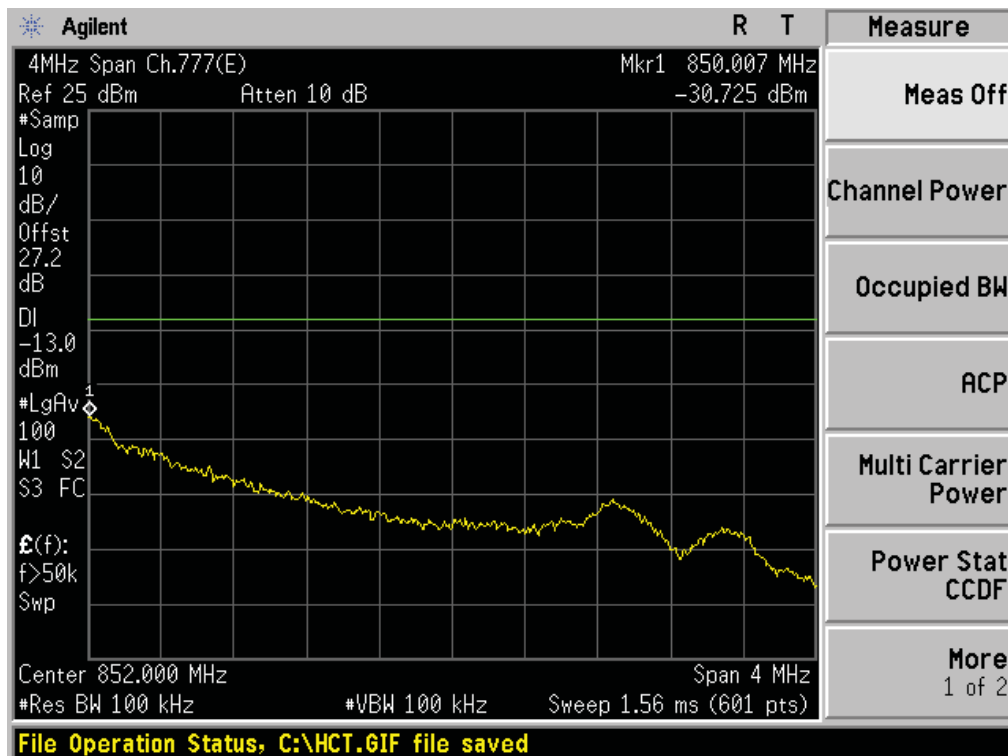

■ PCS CDMA MODE (25 CH.) Block Edge

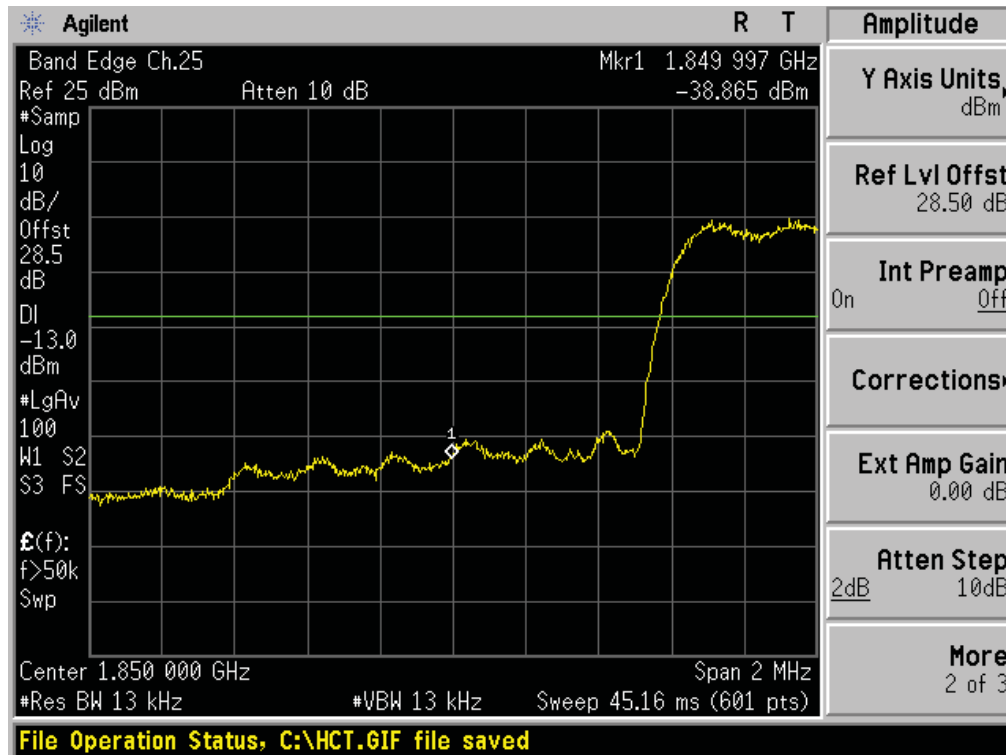

■ PCS CDMA MODE (1175 CH.) Block Edge

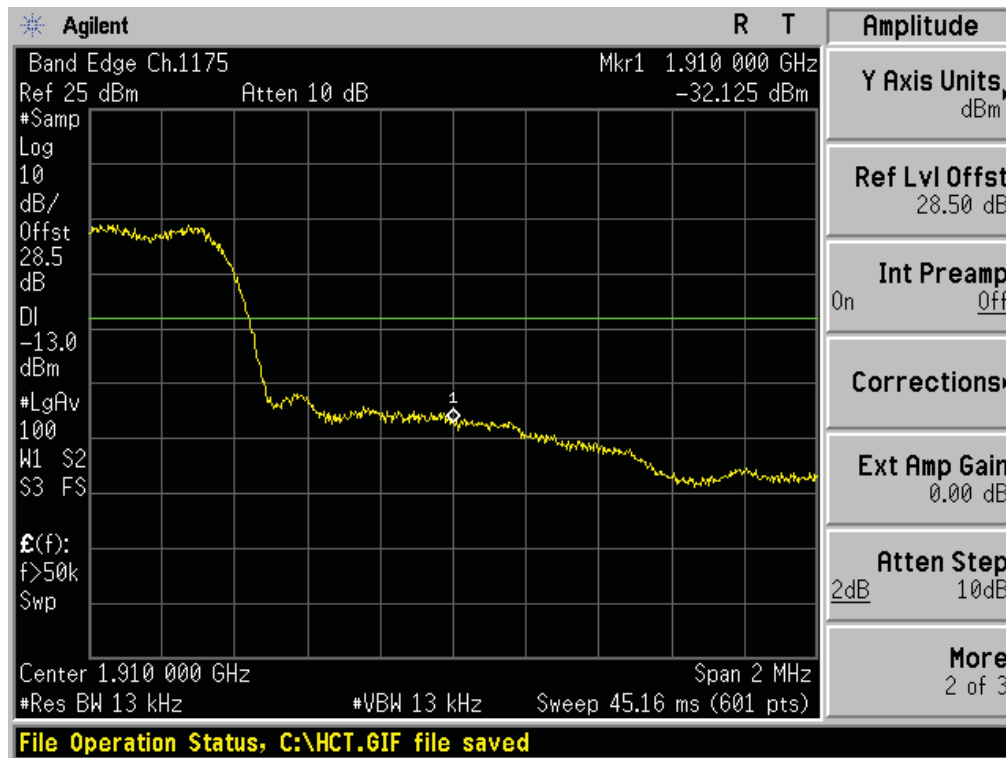


FCC CERTIFICATION REPORT


[www.hct.co.kr](http://www.hct.co.kr)

|                                   |                                     |                                                                |                      |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|----------------------|
| Test Report No.<br>HCTR1210FR10-3 | Date of Issue:<br>November 14, 2012 | EUT Type:<br>CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN | FCC ID:<br>BEJLTC10F |
|-----------------------------------|-------------------------------------|----------------------------------------------------------------|----------------------|


■ PCS CDMA EVDO MODE (25 CH.) Block Edge

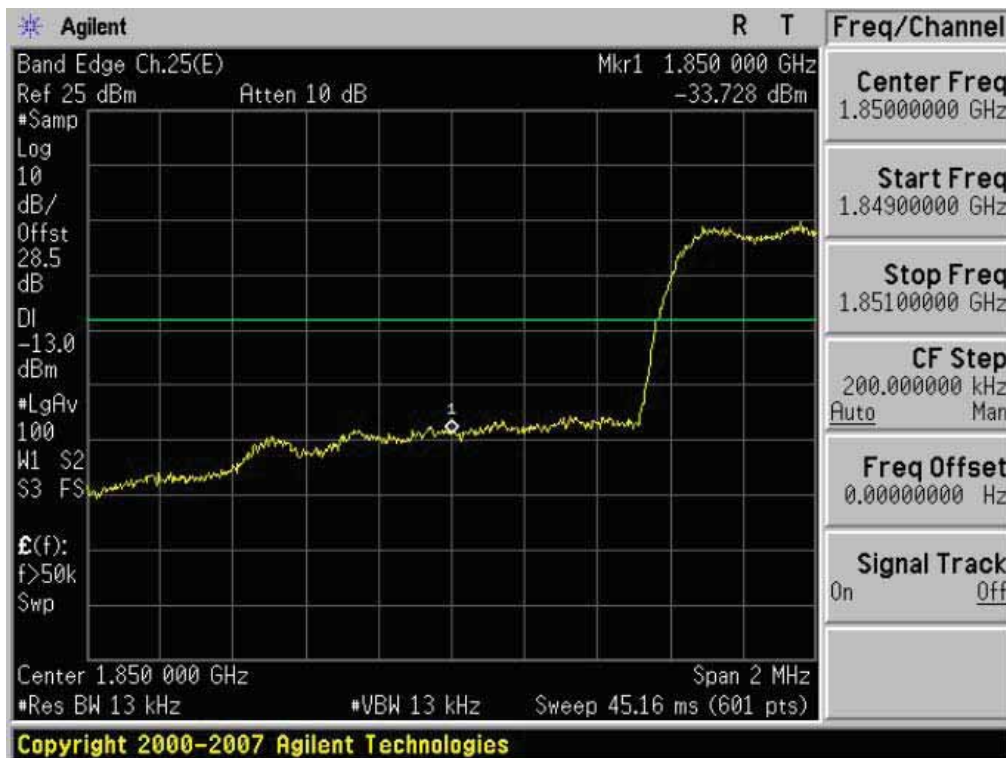


■ PCS CDMA EVDO MODE (1175 CH.) Block Edge

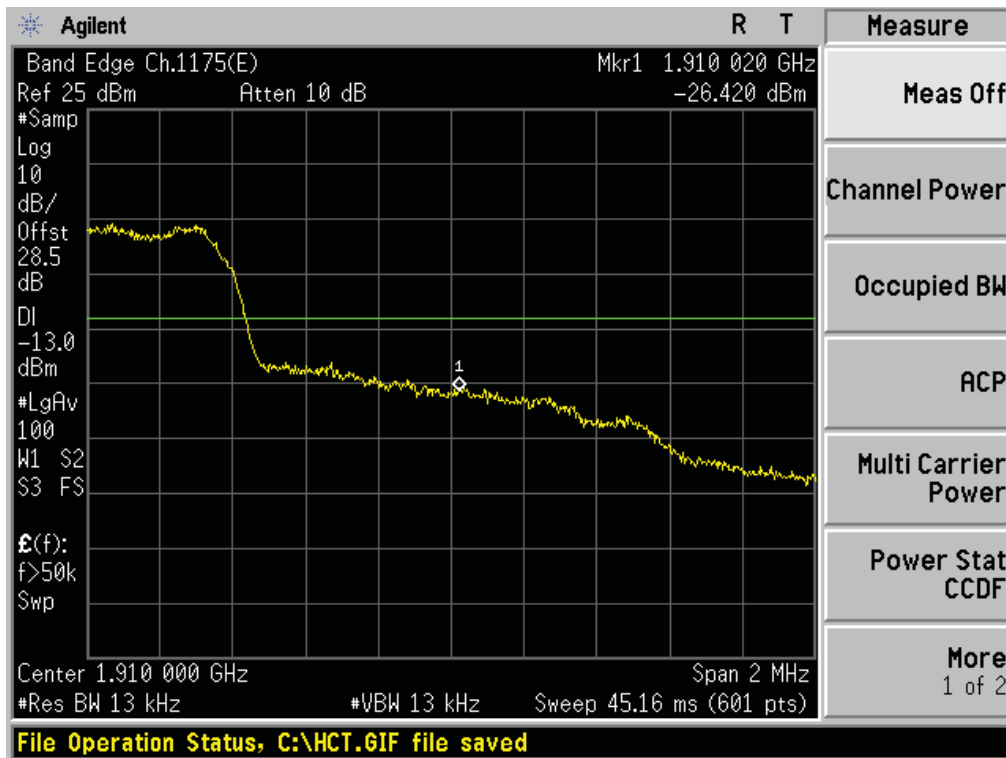


■ PCS CDMA MODE (25 CH.) 4 MHz Span

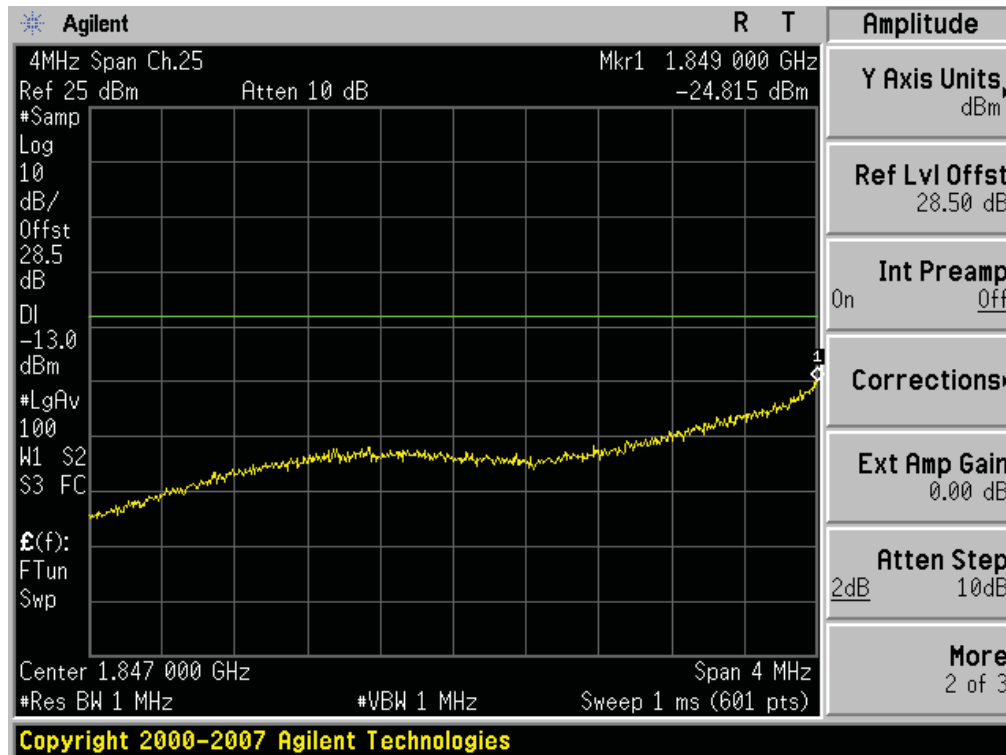


■ PCS CDMA MODE (1175 CH.) 4 MHz Span

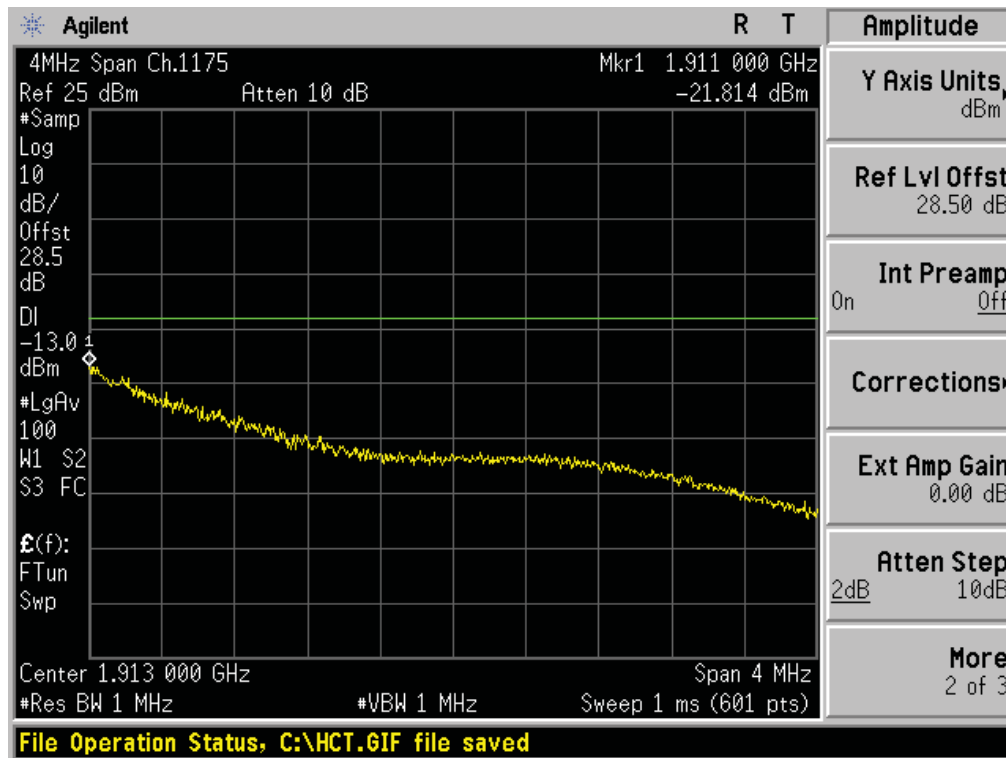


■ PCS CDMA EVDO MODE (25 CH.) 4 MHz Span

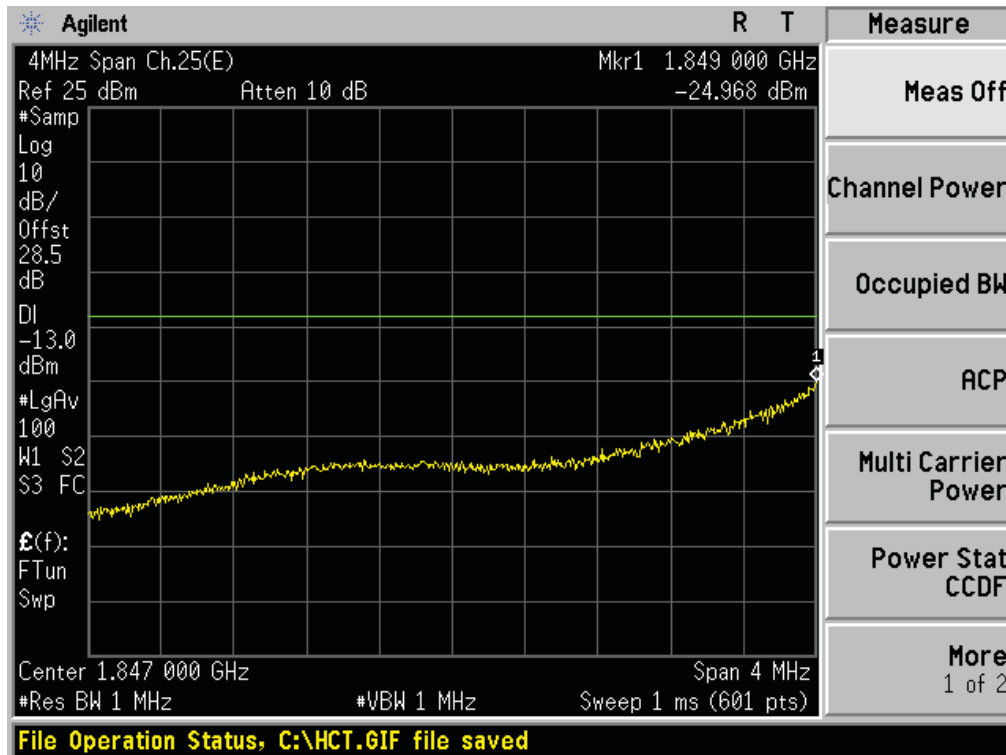


■ PCS CDMA EVDO MODE (1175 CH.) 4 MHz Span

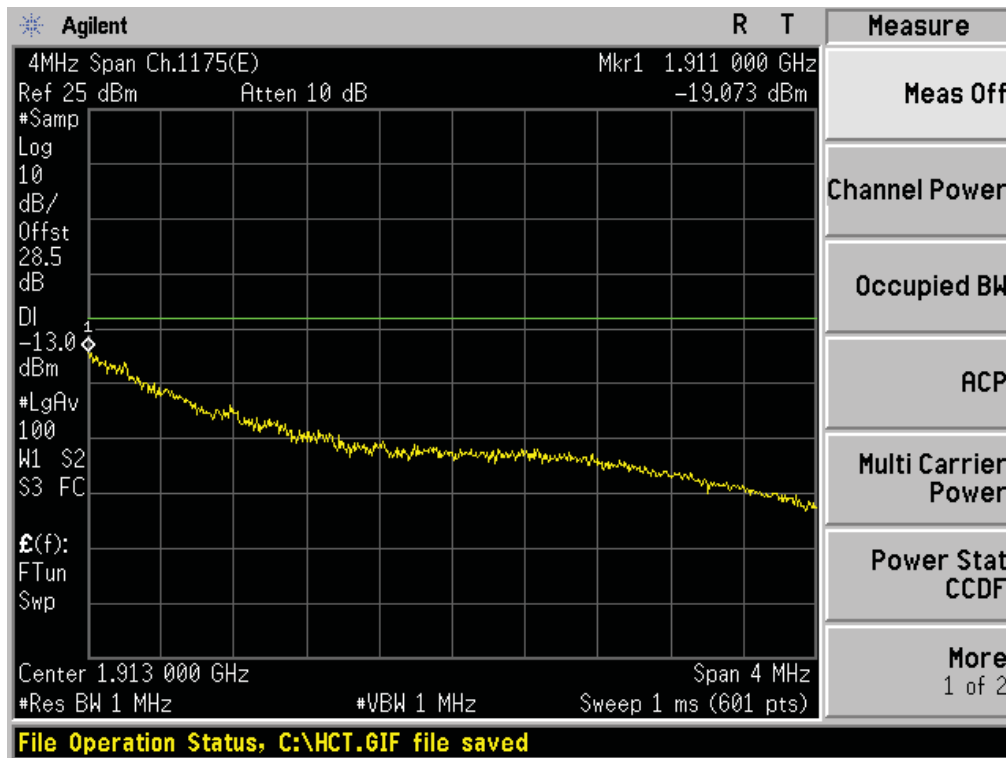


■ CDMA MODE (1013 CH.) Conducted Spurious Emissions - 1

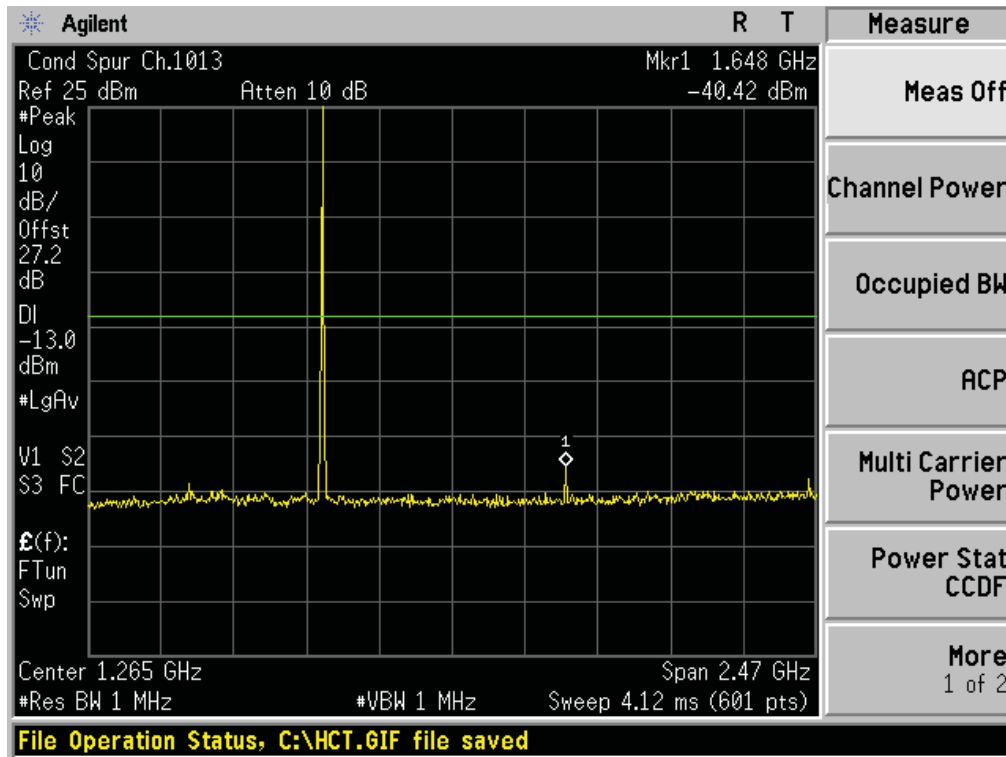


■ CDMA MODE (1013 CH.) Conducted Spurious Emissions - 2

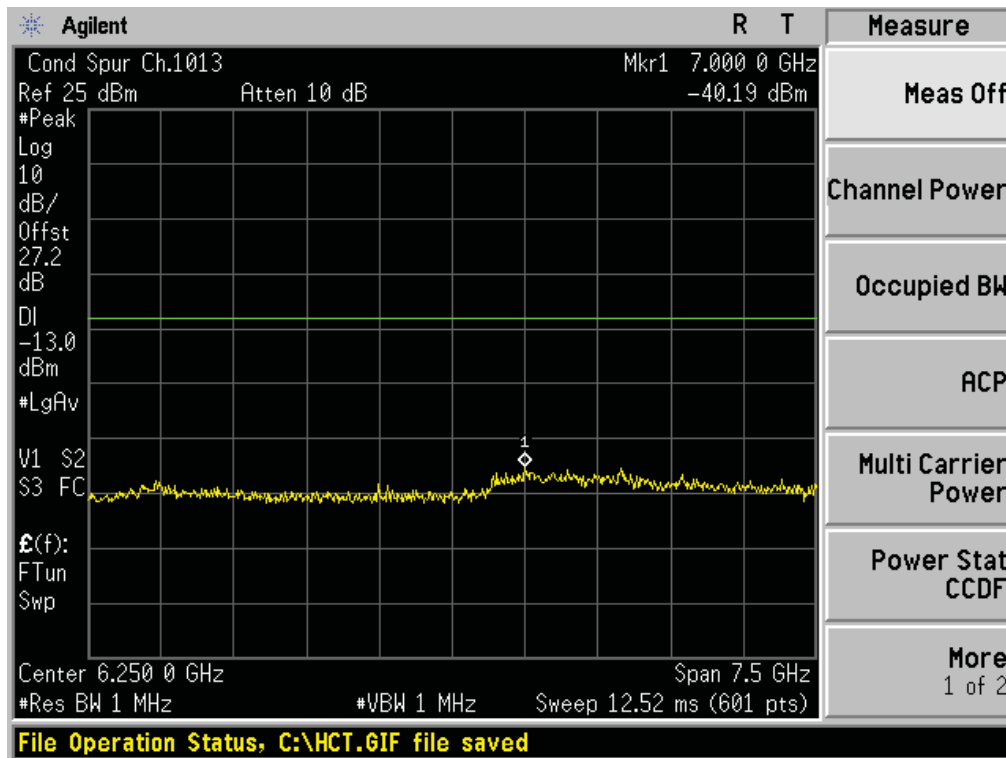


■ CDMA MODE (384 CH.) Conducted Spurious Emissions - 1

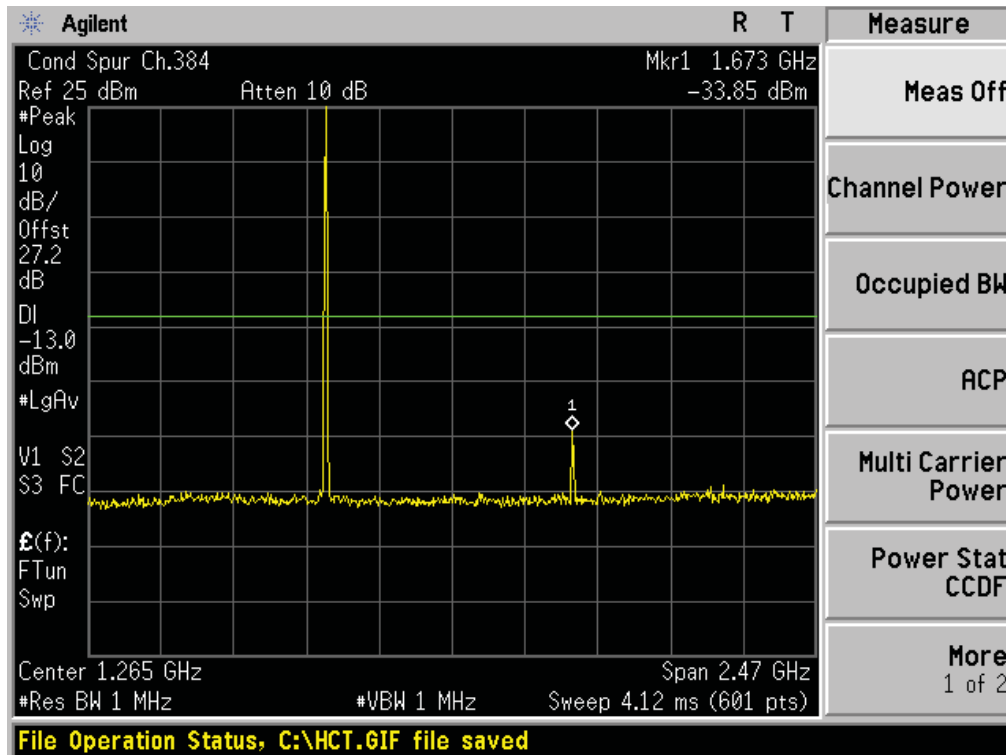


■ CDMA MODE (384 CH.) Conducted Spurious Emissions - 2

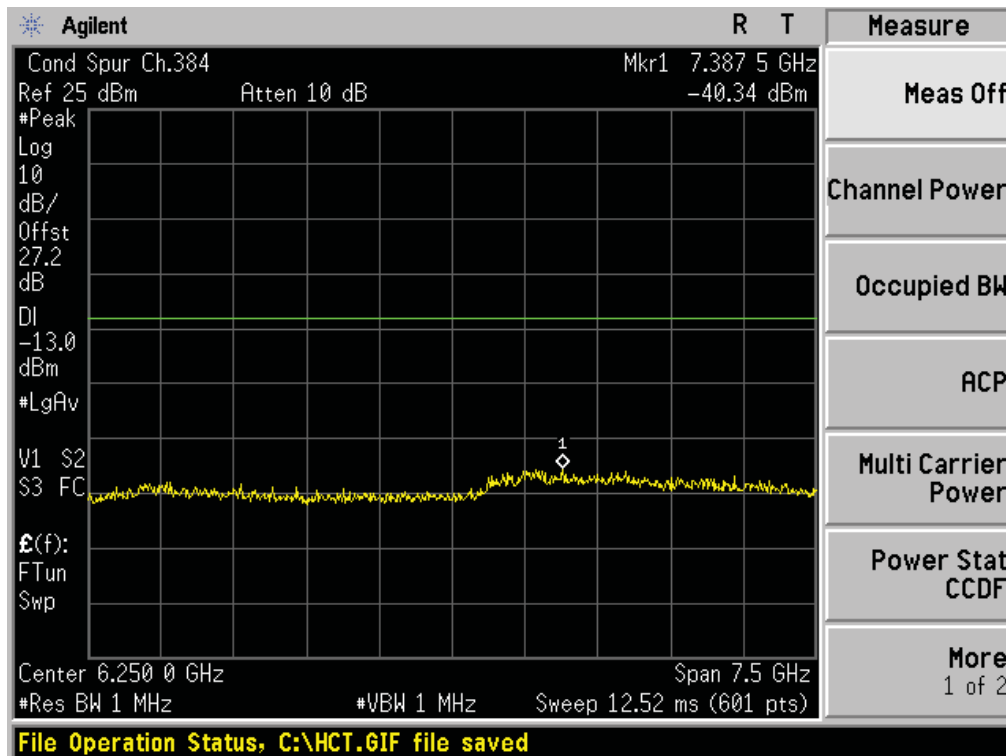


■ CDMA MODE (777 CH.) Conducted Spurious Emissions - 1

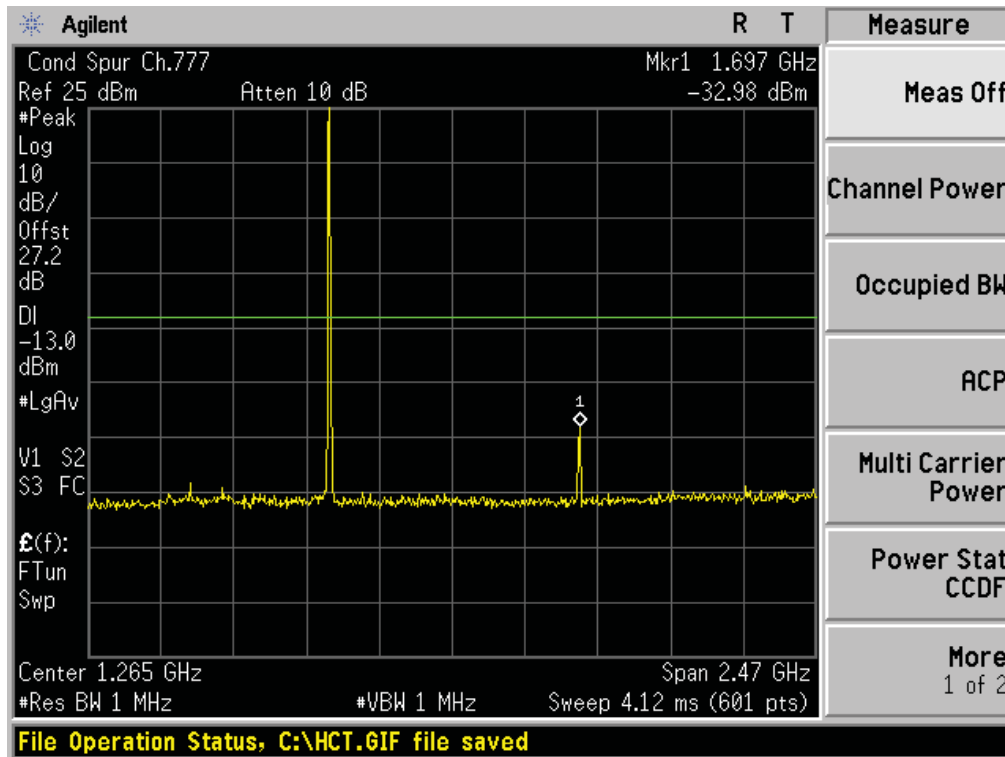


■ CDMA MODE (777 CH.) Conducted Spurious Emissions - 2

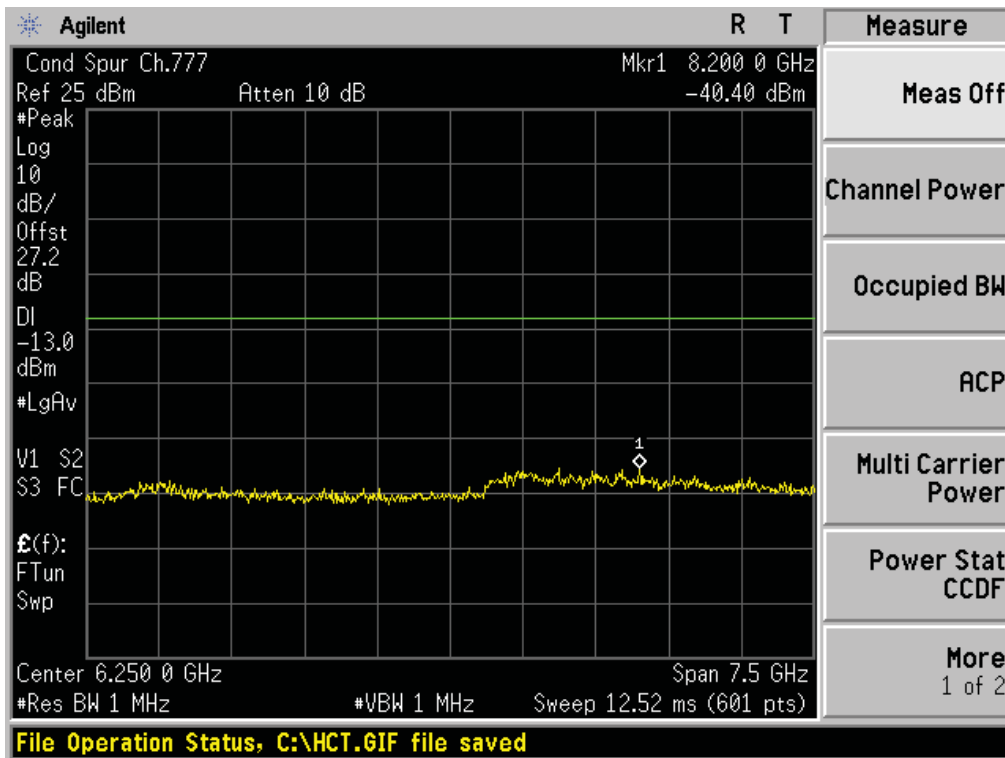


■ PCS CDMA MODE (25 CH.) Conducted Spurious Emissions - 1

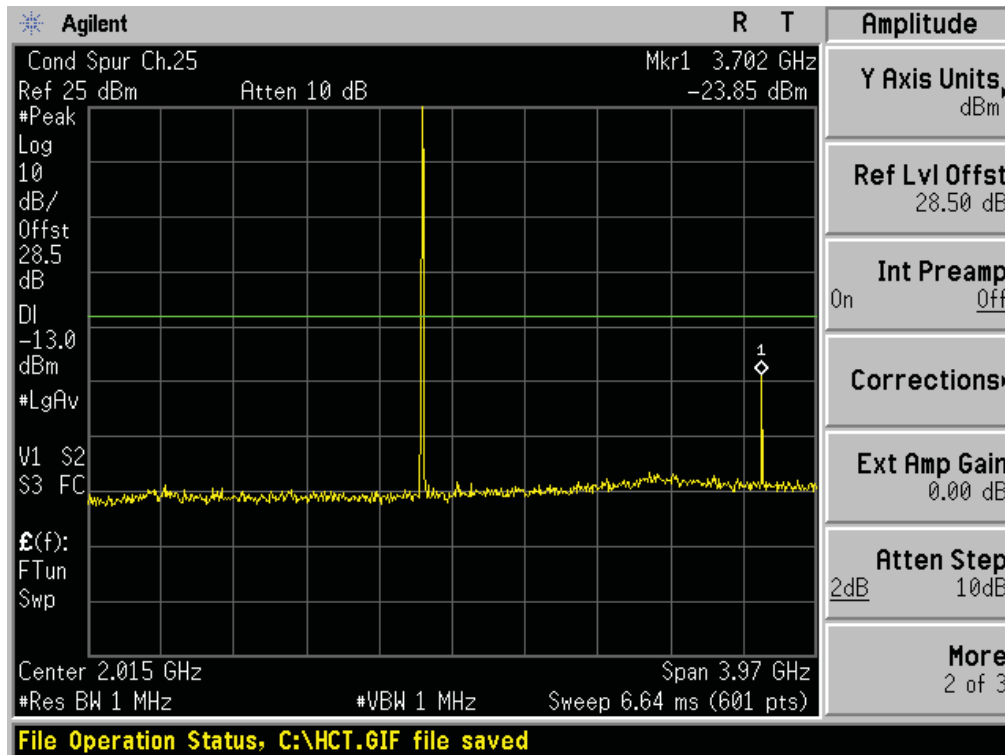


■ PCS CDMA MODE (25 CH.) Conducted Spurious Emissions - 2

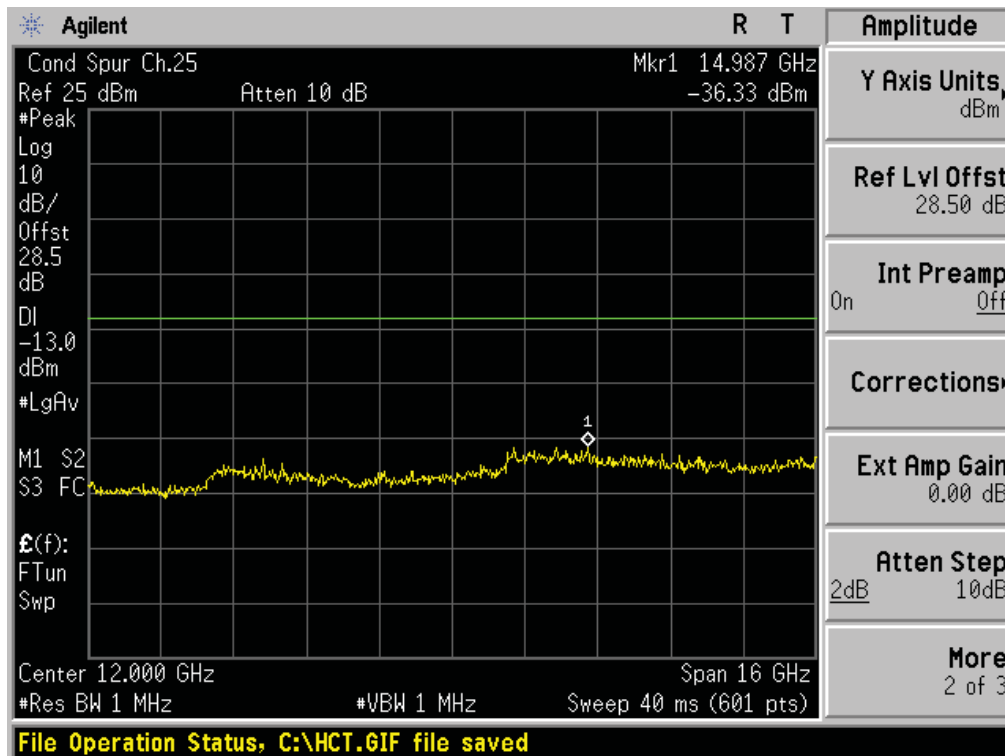


■ PCS CDMA MODE (600 CH.) Conducted Spurious Emissions - 1

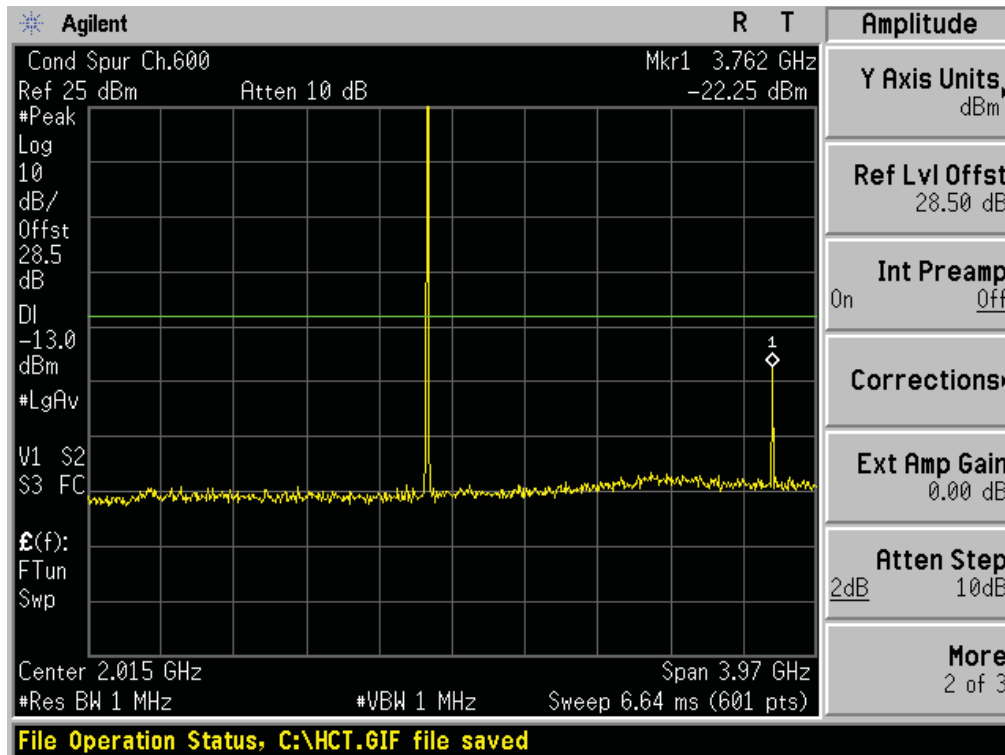

■ PCS CDMA MODE (600 CH.) Conducted Spurious Emissions - 2

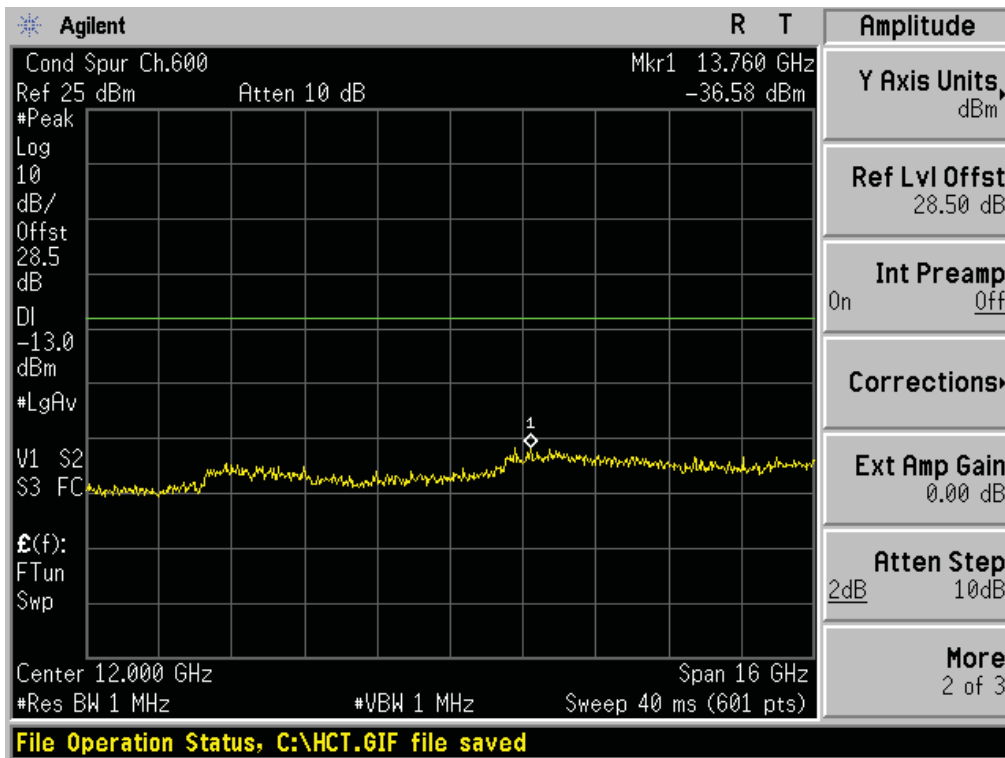

■ PCS CDMA MODE (1175 CH.) Conducted Spurious Emissions - 1

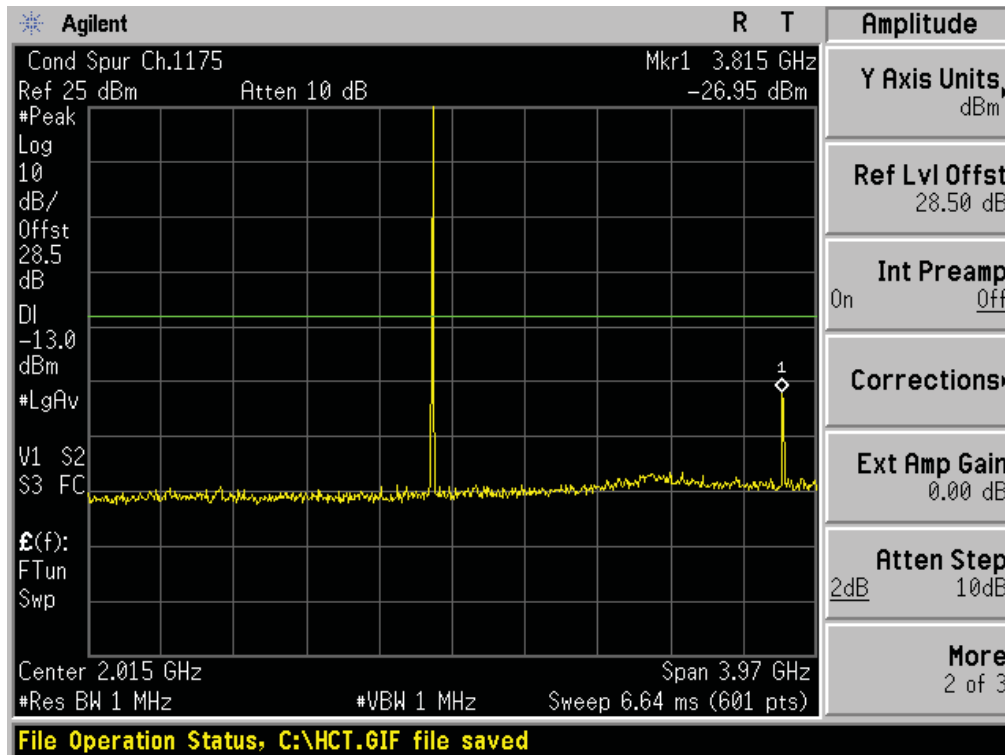

■ PCS CDMA MODE (1175 CH.) Conducted Spurious Emissions - 2

