

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
LG Electronics Inc.

Address:
19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si,
Gyeonggi-do 451-713, Korea

Date of Issue:
November 14, 2012
Test Site/Location:

HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,
Icheon-si, Kyunggi-Do, Korea

Report No.: HCTR1210FR11-3

HCT FRN: 0005866421

FCC ID: BEJLTTTC10F

APPLICANT: LG Electronics Inc.

FCC Model(s): TC10AN3FU

EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN

FCC Classification: PCS Licensed Transmitter (PCB)

FCC Rule Part(s): §2 , §22, §24

Tx Frequency:
1852.5 MHz – 1907.5 MHz (LTE – Band2 (5MHz))
1855.5 MHz – 1905.0 MHz (LTE – Band2 (10MHz))
826.5 MHz – 846.5 MHz (LTE – Band 5 (5MHz))
829.0 MHz – 844.0 MHz (LTE – Band 5 (10MHz))

Max. Conducted Power:

Band 2 (5 MHz) :	0.206 W (QPSK) (23.13 dBm)
	0.166 W (16-QAM) (22.20 dBm)
Band 2 (10 MHz) :	0.212 W (QPSK) (23.26 dBm)
	0.169 W (16-QAM) (22.29 dBm)
Band 5 (5 MHz) :	0.201 W (QPSK) (23.04 dBm)
	0.158 W (16-QAM) (22.00 dBm)
Band 5 (10 MHz) :	0.199 W (QPSK) (22.99 dBm)
	0.158 W (16-QAM) (21.98 dBm)
Band 2 (5 MHz) :	4M51G7D (QPSK) / 4M48W7D (16-QAM)
Band 2 (10 MHz)	8M99G7D (QPSK) / 8M97W7D (16-QAM)
Band 5 (5 MHz) :	4M47G7D (QPSK) / 4M47W7D (16-QAM)
Band 5 (10 MHz) :	8M97G7D (QPSK) / 8M95W7D (16-QAM)

Emission Designator(s):

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)


Report prepared by
: Jae Chul Shin
Test engineer of RF Team


Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTTTC10F	

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1210FR11	October 05, 2012	First Approval Report
HCTR1210FR11-1	October 26, 2012	Corrected the ERP Sample calculation on page 14. Corrected the unit of PAR on page 17. Corrected the unit of the antenna gain and EIRP in section 7.6 and 7.7
HCTR1210FR11-2	November 01, 2012	Corrected the EUT type.
HCTR1210FR11-3	November 14, 2012	Corrected the Max. RF Output Power on page 1 and 4. Corrected the table for the spurious emissions on page 25 ~ 26.

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION.....	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER.....	6
3.2 OCCUPIED BANDWIDTH.	7
3.3 FREQUENCY RANGE	8
3.4 PEAK-AVERAGE RATIO.	8
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	9
3.6 RADIATED SPURIOUS AND HARMONIC EMISSIONS	10
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	11
4. LIST OF TEST EQUIPMENT	12
5. SUMMARY OF TEST RESULTS	13
6. SAMPLE CALCULATION	14
7. TEST DATA	15
7.1 CONDUCTED OUTPUT POWER.....	15
7.2 PEAK-TO-AVERAGE RATIO	17
7.3 OCCUPIED BANDWIDTH	18
7.4 CONDUCTED SPURIOUS EMISSIONS	18
7.4.1 BAND EDGE.....	19
7.5 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT	20
7.6 EFFECTIVE RADIATED POWER OUTPUT	22
7.7 RADIATED SPURIOUS EMISSIONS.....	23
7.7.1 RADIATED SPURIOUS EMISSIONS (Band 2)	23
7.7.2 RADIATED SPURIOUS EMISSIONS (Band 5)	25
7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	27
7.8.1 FREQUENCY STABILITY (LTE Band 2).....	27
7.8.2 FREQUENCY STABILITY (LTE Band 5).....	29
7.8.3 FREQUENCY STABILITY (LTE Band 5).....	30
8. TEST PLOTS.....	31

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics Inc.

Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 451-713, Korea

FCC ID: BEJLTC10F

Application Type: Certification

FCC Classification: PCS Licensed Transmitter (PCB)

FCC Rule Part(s): §2, §22, §24

EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN

FCC Model(s): TC10AN3FU

Tx Frequency: 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5MHz))
1855.5 MHz – 1905.0 MHz (LTE – Band2 (10MHz))
826.5 MHz – 846.5 MHz (LTE – Band 5 (5MHz))
829.0 MHz – 844.0 MHz (LTE – Band 5 (10MHz))

Max. Conducted Power:

Band 2 (5 MHz) :	0.206 W (QPSK) (23.13 dBm)
	0.166 W (16-QAM) (22.20 dBm)
Band 2 (10 MHz) :	0.212 W (QPSK) (23.26 dBm)
	0.169 W (16-QAM) (22.29 dBm)
Band 5 (5 MHz) :	0.201 W (QPSK) (23.04 dBm)
	0.158 W (16-QAM) (22.00 dBm)
Band 5 (10 MHz) :	0.199 W (QPSK) (22.99 dBm)
	0.158 W (16-QAM) (21.98 dBm)

Emission Designator(s):

Band 2 (5 MHz) :	4M51G7D (QPSK) / 4M48W7D (16-QAM)
Band 2 (10 MHz) :	8M99G7D (QPSK) / 8M97W7D (16-QAM)
Band 5 (5 MHz) :	4M47G7D (QPSK) / 4M47W7D (16-QAM)
Band 5 (10 MHz) :	8M97G7D (QPSK) / 8M95W7D (16-QAM)

Date(s) of Tests: September 10, 2012 ~ October 05, 2012

Antenna Specification

Manufacturer: Laird Technologies

Antenna type: MIMO capable vehicle dome antenna

Peak Gain: Band 2: 4.55 dBi
Band 5: 1.62 dBi

2. INTRODUCTION

2.1. EUT DESCRIPTION

The TC10AN3FU CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN consists of LTE 2 and 5.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.


2.3. TEST FACILITY

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

3. DESCRIPTION OF TESTS

3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER

Test Set-up

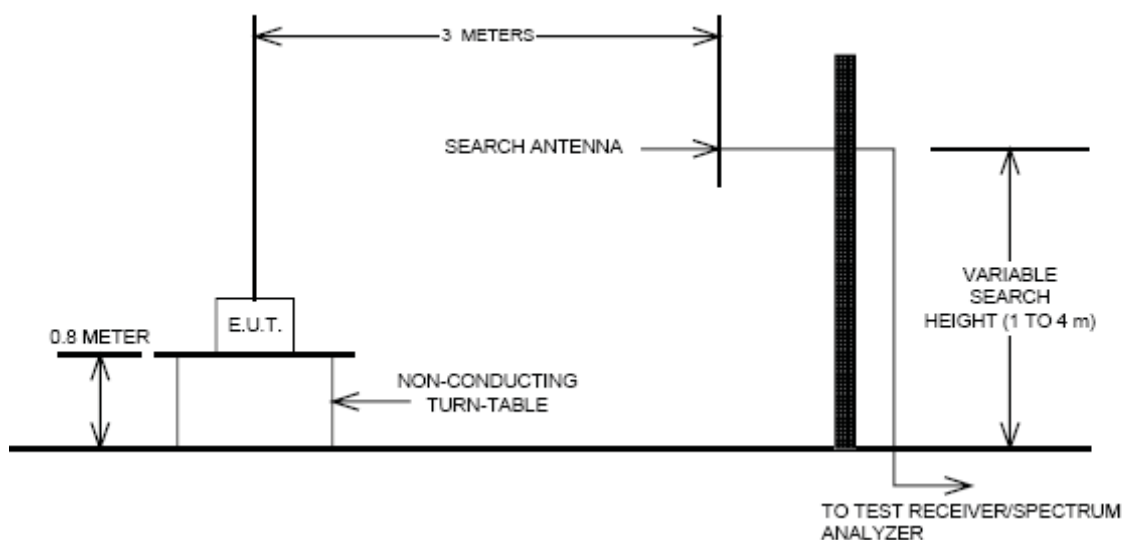

Test Procedure

Radiated emission measurements were performed at an Fully-anechoic chamber.


The equipment under test is placed on a non-conductive table 3-meters from the receive antenna. A turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F

3.2 OCCUPIED BANDWIDTH.

Test set-up

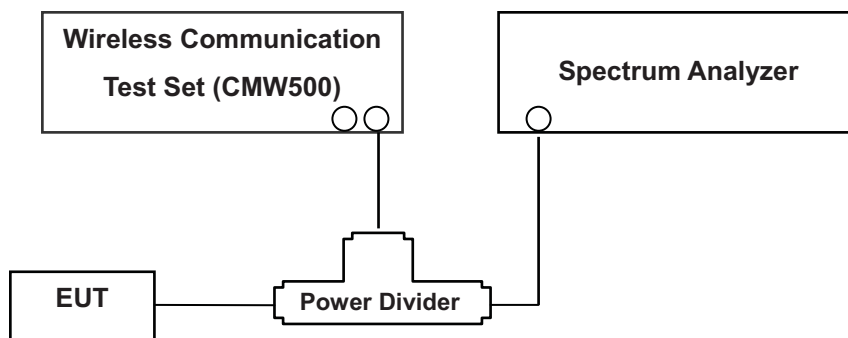

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure


The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.3 FREQUENCY RANGE

§22.917(a): Cellular – Mobile Frequency Blocks

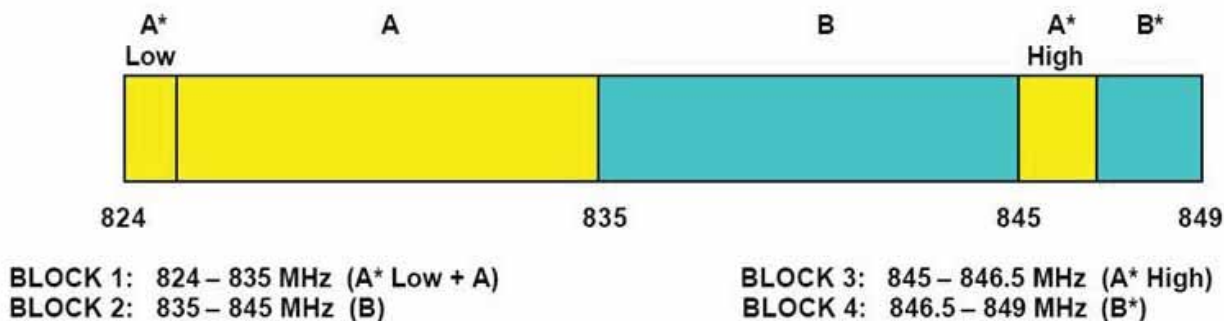

§ 24.229: PCS – Mobile Frequency Blocks

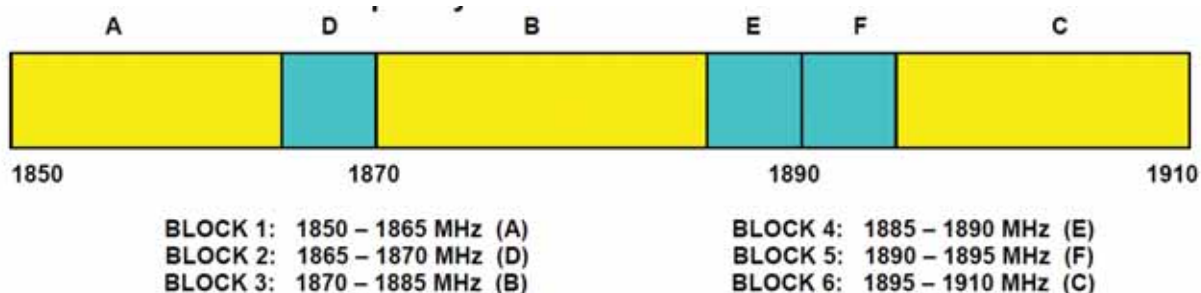

3.4 PEAK-AVERAGE RATIO.

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 26.5 GHz. A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F

3.6 RADIATED SPURIOUS AND HARMONIC EMISSIONS

Test Set-up

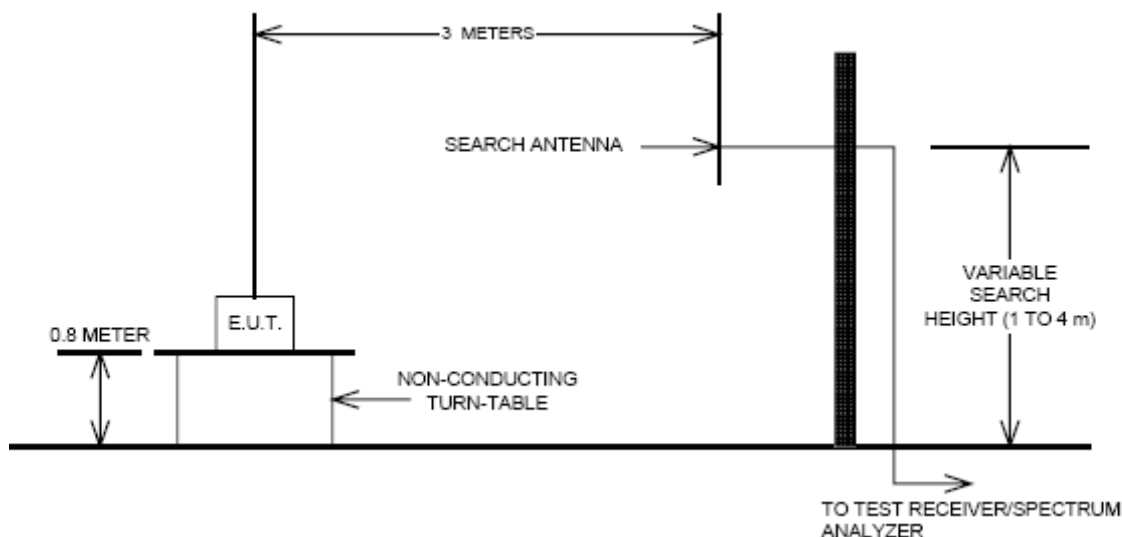

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The Fully-anechoic chamber meets requirements in ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable platform mounted at three from the antenna mast.

- 1) The unit mounted on a turntable 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.

Test Procedure


The equipment under test is placed on a non-conductive table 3-meters from the receive antenna. A turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

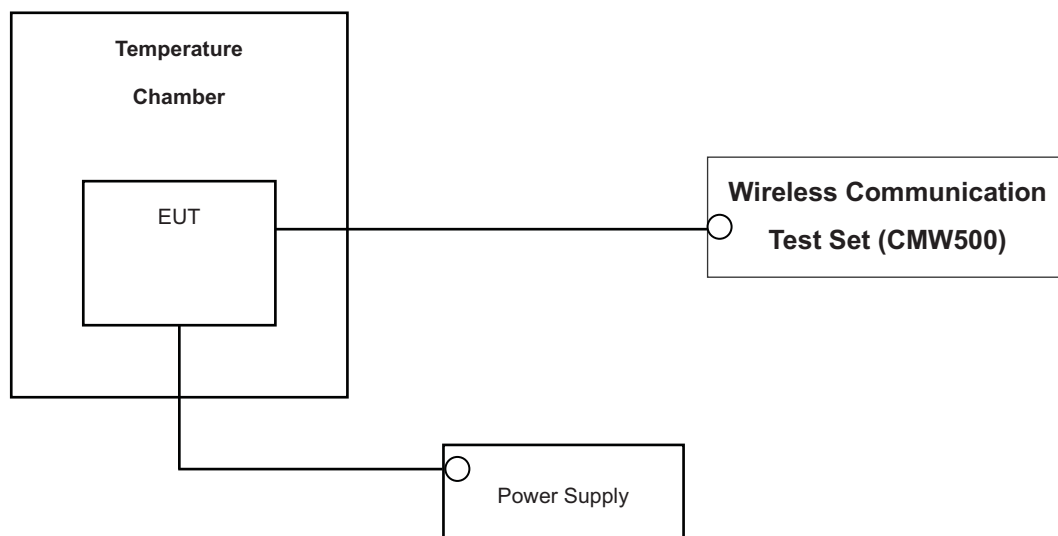

* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\ \%$ ($\pm 2.5\ \text{ppm}$) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	E9327A/ Power Sensor	MY4442009	Annual	05/02/2013
R&S	CMW500/ Base Station	1201.0002K50_116858	Annual	01/17/2013
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/11/2013
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	05/02/2013
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	05/02/2013
Hewlett Packard	11667B / Power Splitter	10126	Annual	11/04/2012
Digital	EP-3010/ Power Supply	3110117	Annual	11/07/2012
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/11/2013
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/11/2013
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	11/07/2012
Schwarzbeck	BBHA 9120D/ Horn Antenna	296	Biennial	02/20/2014
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	05/02/2013
WEINSCHL	ATTENUATOR	BR0592	Annual	11/07/2012
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/11/2013
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2013

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
22.913(a)(2),	Effective Radiated Power(Band 5)	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS
24.232(c)	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions		PASS

6. SAMPLE CALCULATION

A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
LTE	26065	1852.5	-16.48	17.23	10.40	2.83	H	0.301	24.79

$$\text{EIRP} = \text{SubstituteLEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**EIRP**).

B. Emission Designator

QPSK Modulation

Emission Designator = 8M95G7D

LTE BW = 8.95 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M94W7D

LTE BW = 8.94 MHz

D = Amplitude/Angle Modulated


7 = Quantized/Digital Info

W = Combination (Audio/Data)

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

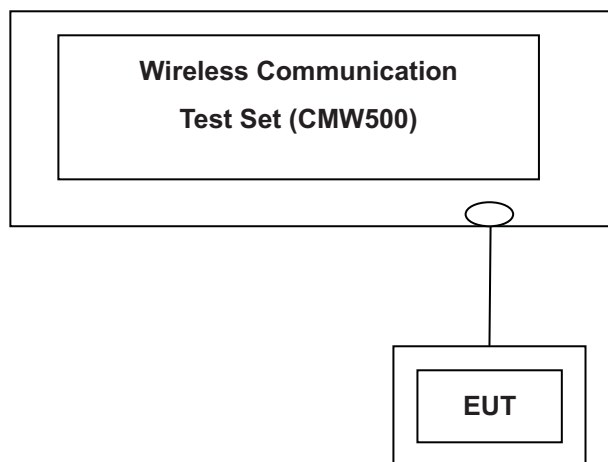

Test Result

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 2	5	1852.5	18625	1	0	22.92	21.95
				1	24	23.13	22.20
				12	6	22.00	21.16
				25	0	22.06	21.14
		1880.0	18900	1	0	22.89	21.91
				1	24	22.60	21.67
				12	6	21.79	20.85
				25	0	21.75	20.74
		1907.5	19175	1	0	23.07	22.09
				1	24	22.81	21.74
				12	6	22.20	21.22
				25	0	22.15	21.12

LTE Conducted Average Output Powers (5 MHz Band 2 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 2	10	1855.0	18650	1	0	23.02	22.05
				1	49	23.26	22.29
				25	12	22.17	21.27
				50	0	22.22	21.29
		1880.0	18900	1	0	22.97	22.03
				1	49	22.65	21.64
				25	12	21.78	20.75
				50	0	21.84	20.84
		1905.0	19150	1	0	23.12	22.15
				1	49	22.74	21.80
				25	12	22.14	21.18
				50	0	22.17	21.20

LTE Conducted Average Output Powers (10 MHz Band 2 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 5	5	826.5	20425	1	0	23.04	21.75
				1	24	22.91	21.59
				12	6	21.83	20.73
				25	0	21.82	20.73
		836.5	20525	1	0	23.02	21.80
				1	24	22.80	21.56
				12	6	21.79	20.71
				25	0	21.78	20.77
		846.5	20625	1	0	22.92	22.00
				1	24	22.67	21.86
				12	6	21.67	20.75
				25	0	21.72	20.72

LTE Conducted Average Output Powers (5 MHz Band 5 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 5	10	829.0	20450	1	0	22.93	21.88
				1	49	22.99	21.98
				25	12	21.85	20.89
				50	0	21.80	20.75
		836.5	20525	1	0	22.98	21.71
				1	49	22.85	21.66
				25	12	21.86	20.75
				50	0	21.73	20.66
		844.0	20600	1	0	22.80	21.88
				1	49	22.75	21.88
				25	12	21.74	20.76
				50	0	21.73	20.63

LTE Conducted Average Output Powers (10 MHz Band 5 LTE)

Note : Detecting mode is average.

7.2 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 2	5 MHz	1880.0	QPSK	25	0	6.25
			16-QAM	25	0	7.49
	10 MHz	1880.0	QPSK	50	0	6.67
			16-QAM	50	0	7.64

- Plots of the EUT's Peak- to- Average Ratio are shown Page 36 ~ 37

7.3 OCCUPIED BANDWIDTH

Band	Band Width (MHz)	Frequency (Mhz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 2	5	1880.0	QPSK	25	0	4.51
			16-QAM	25	0	4.48
	10	1880.0	QPSK	50	0	8.99
			16-QAM	50	0	8.97

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 5	5 MHz	836.5	QPSK	25	0	4.47
			16-QAM	25	0	4.47
	10 MHz	836.5	QPSK	50	0	8.97
			16-QAM	50	0	8.95

- Plots of the EUT's Occupied Bandwidth are shown Page 32 ~ 35

7.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (Mhz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 2	5	1852.5	QPSK	1	24	3.7100	-31.43
		1880.0		1	0	3.7564	-23.71
		1907.5		1	0	3.8109	-25.08
	10	1855.0		1	49	3.7200	-27.88
		1880.0		1	0	3.7503	-25.32
		1905.0		1	0	3.8008	-22.83

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 5	5	826.5	QPSK	1	0	1.6489	-33.92
		836.5	QPSK	1	0	2.5028	-37.89
		846.5	QPSK	1	0	1.6893	-37.39
	10	829.0	QPSK	1	49	19.0148	-38.61
		836.5	QPSK	1	0	2.4968	-38.71
		844.0	QPSK	1	0	2.5190	-33.20

- Plots of the EUT's Conducted Spurious Emissions are shown Page 50 ~ 61

7.4.1 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 38 ~ 49

7.5 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1852.5	5	QPSK	-12.64	19.30	10.23	1.78	H	0.596	27.75
		16-QAM	-12.63	19.31	10.23	1.78	H	0.597	27.76
1880.0		QPSK	-14.67	17.46	10.25	1.77	V	0.393	25.94
		16-QAM	-14.85	17.28	10.25	1.77	V	0.377	25.76
1907.5		QPSK	-14.56	17.64	10.29	1.75	V	0.415	26.18
		16-QAM	-14.46	17.74	10.29	1.75	V	0.425	26.28

Equivalent Isotropic Radiated Power Output Data (Band 2_5 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1855.0	10	QPSK	-13.03	18.91	10.23	1.78	H	0.545	27.36
		16-QAM	-12.88	19.06	10.23	1.78	H	0.564	27.51
1880.0		QPSK	-14.92	17.21	10.25	1.77	V	0.371	25.69
		16-QAM	-14.59	17.54	10.25	1.77	V	0.400	26.02
1905.0		QPSK	-13.63	18.57	10.29	1.75	V	0.514	27.11
		16-QAM	-13.59	18.61	10.29	1.75	V	0.519	27.15

Equivalent Isotropic Radiated Power Output Data (Band 2_10 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of



the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTTTC10F

7.6 EFFECTIVE RADIATED POWER OUTPUT

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
826.5	5 MHz	QPSK	-8.54	40.39	-10.54	1.64	V	0.662	28.21
		16-QAM	-7.94	40.99	-10.54	1.61	V	0.766	28.84
836.5		QPSK	-8.90	40.02	-10.50	1.67	V	0.610	27.85
		16-QAM	-8.56	40.36	-10.50	1.67	V	0.659	28.19
846.5		QPSK	-8.97	39.91	-10.47	1.65	V	0.601	27.79
		16-QAM	-8.68	40.20	-10.47	1.65	V	0.643	28.08

Equivalent Isotropic Radiated Power Output Data (Band 5 – 5 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
829.0	10 MHz	QPSK	-9.16	39.77	-10.54	1.64	V	0.574	27.59
		16-QAM	-8.74	40.19	-10.54	1.61	V	0.637	28.04
836.5		QPSK	-9.01	39.91	-10.50	1.67	V	0.594	27.74
		16-QAM	-8.72	40.20	-10.50	1.67	V	0.635	28.03
844.0		QPSK	-9.21	39.67	-10.47	1.65	V	0.569	27.55
		16-QAM	-8.69	40.19	-10.47	1.65	V	0.641	28.07

Equivalent Isotropic Radiated Power Output Data (Band 5 – 10 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is vertical polarization LTE mode.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN		FCC ID: BEJLTTTC10F

7.7 RADIATED SPURIOUS EMISSIONS

7.7.1 RADIATED SPURIOUS EMISSIONS (Band 2)

- ☐ MEASURED OUTPUT POWER: 27.76 dBm = 0.597 W
☐ MODULATION SIGNAL: 5 MHz 16-QAM
☐ DISTANCE: 3 meters
☐ LIMIT: - (43 + 10 log₁₀ (W)) = - 40.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18625 (1852.5)	3705.0	-32.86	12.50	-37.83	2.55	V	-27.88	-55.64
	5557.5	-47.13	13.04	-46.20	3.17	H	-36.33	-64.09
	7410.0	-55.14	11.10	-44.04	3.54	V	-36.48	-64.24
18900 (1880.0)	3760.0	-28.64	12.54	-33.32	2.60	V	-23.38	-51.14
	5640.0	-56.37	13.05	-54.83	3.21	V	-44.99	-72.75
	7520.0	-56.09	10.99	-45.58	3.72	V	-38.31	-66.07
19175 (1907.5)	3815.0	-28.76	12.59	-33.20	2.59	H	-23.20	-50.96
	5722.5	-55.19	13.07	-53.16	3.35	H	-43.44	-71.20
	7630.0	-55.53	11.06	-45.55	3.23	V	-37.72	-65.48

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

■ MEASURED OUTPUT POWER: 27.51 dBm = 0.564 W
 ■ MODULATION SIGNAL: 10 MHz 16-QAM
 ■ DISTANCE: 3 meters
 ■ LIMIT: - (43 + 10 log₁₀ (W)) = - 40.51 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18650 (1855.0)	3710.0	-33.03	12.50	-38.00	2.55	H	-28.05	-55.56
	5565.0	-43.62	13.04	-42.69	3.17	H	-32.82	-60.33
	7420.0	-54.35	11.10	-43.25	3.54	V	-35.69	-63.20
18900 (1880.0)	3760.0	-28.75	12.54	-33.43	2.60	V	-23.49	-51.00
	5640.0	-55.32	13.05	-53.78	3.21	V	-43.94	-71.45
	7520.0	-56.05	10.99	-45.54	3.72	V	-38.27	-65.78
19150 (1905.0)	3810.0	-28.44	12.59	-32.88	2.59	V	-22.88	-50.39
	5715.0	-52.21	13.07	-50.18	3.35	H	-40.46	-67.97
	7620.0	-55.11	11.06	-45.13	3.23	V	-37.30	-64.81

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.7.2 RADIATED SPURIOUS EMISSIONS (Band 5)

- ☐ OPERATING FREQUENCY : 836.50 MHz
☐ MEASURED OUTPUT POWER: 28.84 dBm = 0.766W
☐ MODULATION SIGNAL: 5 MHz 16-QAM
☐ DISTANCE: 3 meters
☐ LIMIT: - (43 + 10 log₁₀ (W)) = - 41.84 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20425 (826.5)	1653.0	-33.92	7.60	-43.45	1.70	H	-37.55	-66.39
	2479.5	-49.98	8.41	-56.17	2.10	H	-49.86	-78.70
	3306.0	-55.10	9.74	-60.99	2.46	V	-53.71	-82.55
20525 (836.5)	1673.0	-30.74	7.67	-40.35	1.74	H	-34.42	-63.26
	2509.5	-51.72	8.42	-57.69	2.11	V	-51.38	-80.22
	3346.0	-55.46	9.81	-62.12	2.48	V	-54.79	-83.63
20625 (846.5)	1693.0	-27.96	7.80	-37.42	1.75	H	-31.37	-60.21
	2539.5	-50.47	8.44	-56.61	2.13	H	-50.30	-79.14
	3386.0	-55.21	9.89	-61.75	2.45	V	-54.31	-83.15

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

■ OPERATING FREQUENCY : 846.50 MHz
 ■ MEASURED OUTPUT POWER: 28.07 dBm = 0.641W
 ■ MODULATION SIGNAL: 10 MHz 16-QAM
 ■ DISTANCE: 3 meters
 ■ LIMIT: - (43 + 10 log₁₀ (W)) = - 41.07 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20450 (829.0)	1658.0	-30.66	7.60	-40.19	1.70	H	-34.29	-62.36
	2487.0	-50.80	8.41	-56.99	2.10	V	-50.68	-78.75
	3316.0	-55.49	9.74	-61.38	2.46	V	-54.10	-82.17
20525 (836.5)	1673.0	-30.42	7.67	-40.03	1.74	H	-34.10	-62.17
	2509.5	-49.75	8.42	-55.72	2.11	H	-49.41	-77.48
	3346.0	-56.22	9.81	-62.88	2.48	V	-55.55	-83.62
20625 (844.0)	1688.0	-29.26	7.80	-38.72	1.75	H	-32.67	-60.74
	2532.0	-50.91	8.44	-57.05	2.13	V	-50.74	-78.81
	3376.0	-55.06	9.89	-61.60	2.45	V	-54.16	-82.23


- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.8.1 FREQUENCY STABILITY (LTE Band 2)


■ OPERATING FREQUENCY:	1880,000,000 Hz
■ CHANNEL:	18900 (5 MHz)
■ REFERENCE VOLTAGE:	12.0 VDC
■ DEVIATION LIMIT:	± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1880 000 012	0	0.000 000	0.000
100%		-30	1879 999 999	-12.85	-0.000 001	-0.007
100%		-20	1880 000 000	-11.76	-0.000 001	-0.006
100%		-10	1879 999 998	-13.82	-0.000 001	-0.007
100%		0	1879 999 994	-17.95	-0.000 001	-0.010
100%		+10	1879 999 995	-16.37	-0.000 001	-0.009
100%		+30	1879 999 995	-16.35	-0.000 001	-0.009
100%		+40	1880 000 013	1.27	0.000 000	0.001
100%		+50	1879 999 989	-23.29	-0.000 001	-0.012
115%	13.8	+20	1880 000 014	2.42	0.000 000	0.001
85%	10.2	+20	1880 000 010	-1.65	0.000 000	-0.001

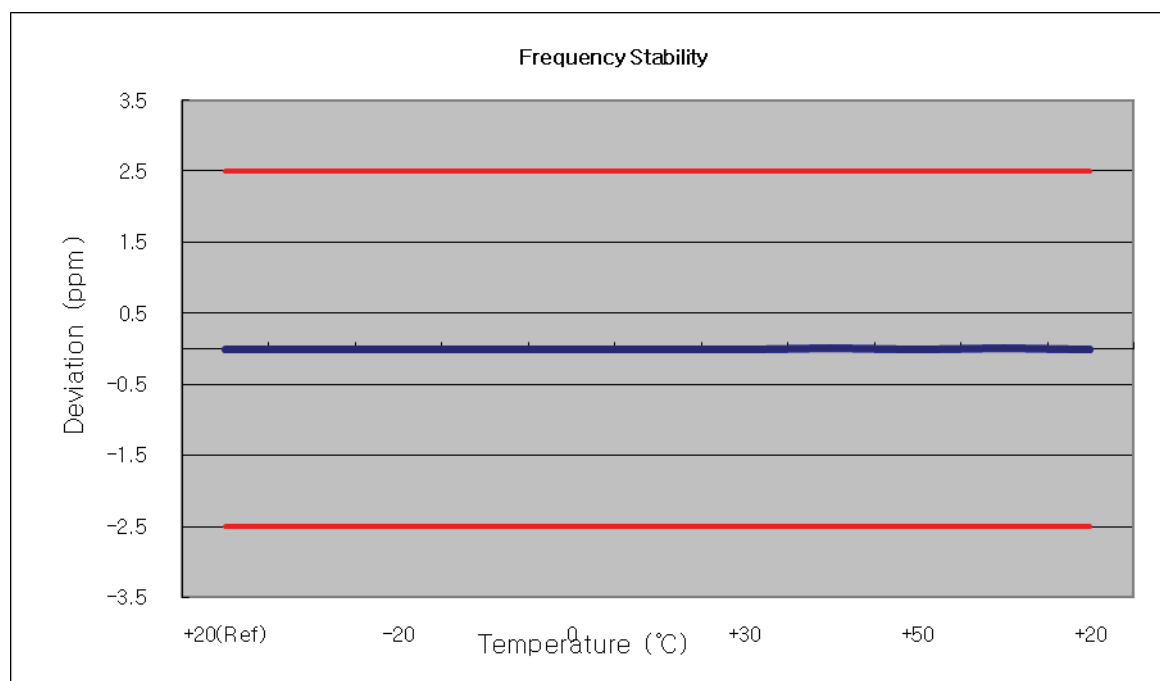

☐ OPERATING FREQUENCY: 1880,000,000 Hz
☐ CHANNEL: 18900 (10 MHz)
☐ REFERENCE VOLTAGE: 12.0 VDC
☐ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1880 000 000	0	0.000 000	0.000
100%		-30	1880 000 001	1.29	0.000 000	0.001
100%		-20	1879 999 997	-3.12	0.000 000	-0.002
100%		-10	1879 999 986	-13.69	-0.000 001	-0.007
100%		0	1879 999 977	-22.76	-0.000 001	-0.012
100%		+10	1880 000 004	3.89	0.000 000	0.002
100%		+30	1879 999 989	-10.49	-0.000 001	-0.006
100%		+40	1879 999 980	-19.37	-0.000 001	-0.010
100%		+50	1880 000 001	1.29	0.000 000	0.001
115%	13.8	+20	1879 999 993	-6.27	0.000 000	-0.003
85%	10.2	+20	1879 999 992	-7.90	0.000 000	-0.004

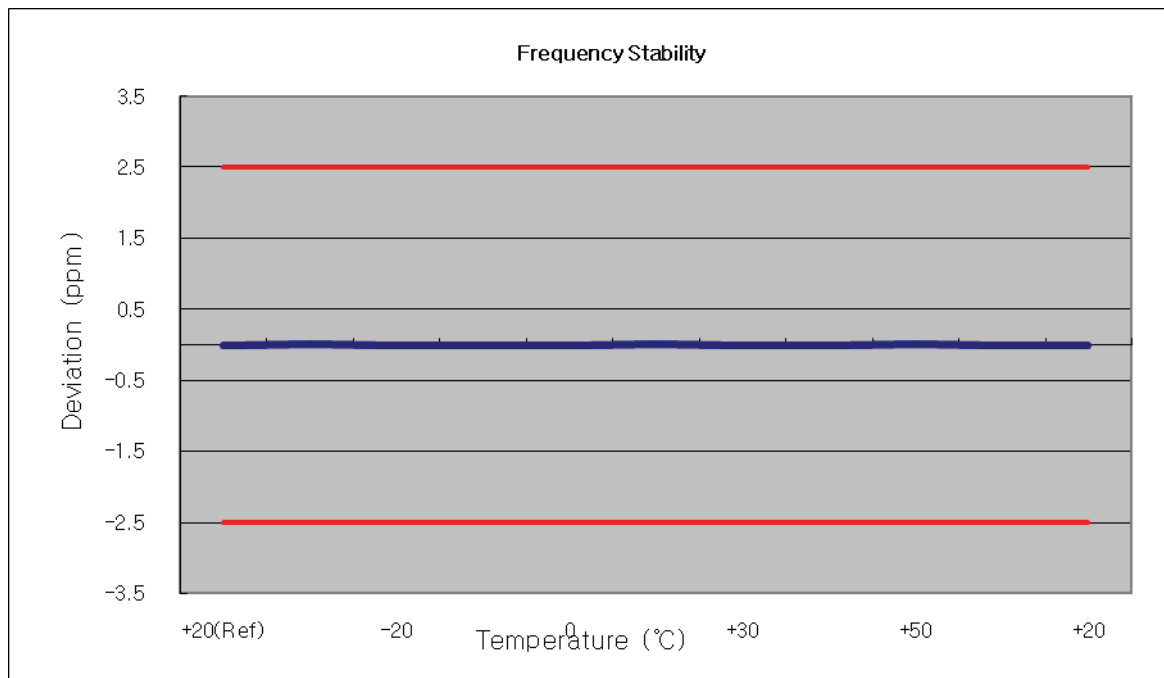

7.8.2 FREQUENCY STABILITY (LTE Band 5)

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525 (5 MHz)
 REFERENCE VOLTAGE: 12.0 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	836 499 999	0	0.000 000	0.000
100%		-30	836 500 000	0.79	0.000 000	0.001
100%		-20	836 499 994	-5.40	-0.000 001	-0.006
100%		-10	836 499 999	0.04	0.000 000	0.000
100%		0	836 500 000	1.14	0.000 000	0.001
100%		+10	836 500 000	1.44	0.000 000	0.002
100%		+30	836 499 998	-1.24	0.000 000	-0.001
100%		+40	836 499 998	-1.43	0.000 000	-0.002
100%		+50	836 499 997	-1.65	0.000 000	-0.002
115%	13.8	+20	836 499 999	-0.27	0.000 000	0.000
85%	10.2	+20	836 500 001	2.20	0.000 000	0.003

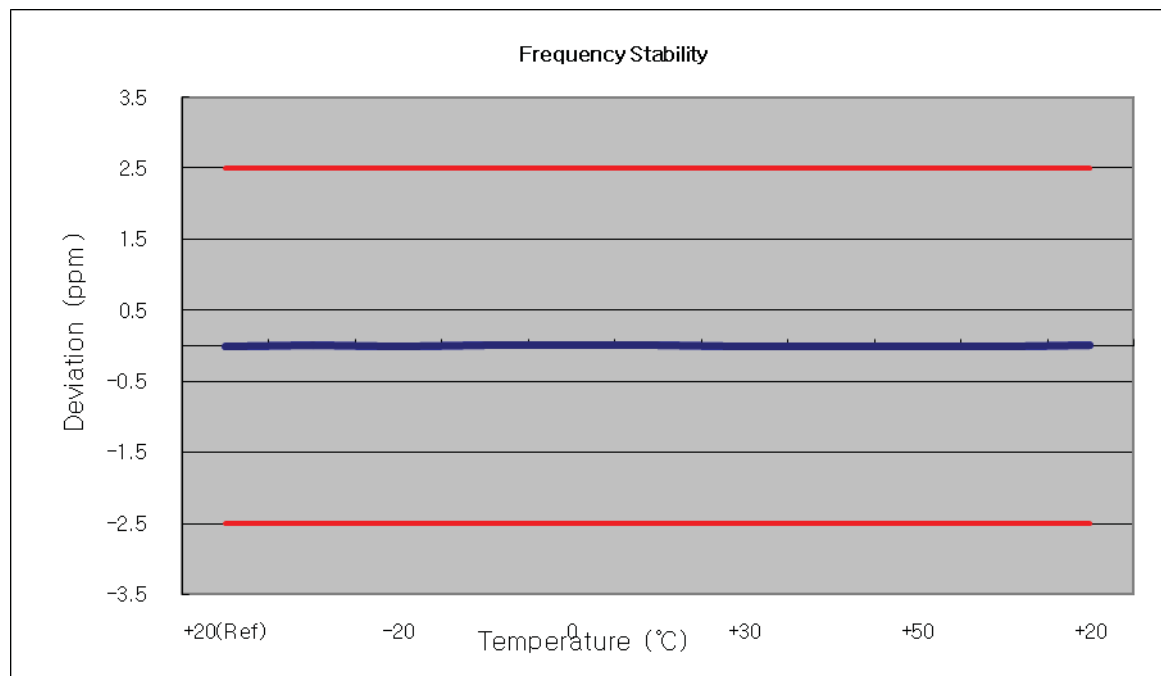

7.8.3 FREQUENCY STABILITY (LTE Band 5)

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525 (10 MHz)
 REFERENCE VOLTAGE: 12.0 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	836 500 001	0	0.000 000	0.000
100%		-30	836 500 001	0.62	0.000 000	0.001
100%		-20	836 500 003	2.42	0.000 000	0.003
100%		-10	836 500 001	0.51	0.000 000	0.001
100%		0	836 500 003	1.96	0.000 000	0.002
100%		+10	836 500 002	1.33	0.000 000	0.002
100%		+30	836 500 000	-0.51	0.000 000	-0.001
100%		+40	836 500 001	0.20	0.000 000	0.000
100%		+50	836 499 999	-2.02	0.000 000	-0.002
115%	13.8	+20	836 500 000	-0.62	0.000 000	-0.001
85%	10.2	+20	836 500 000	-1.00	0.000 000	-0.001

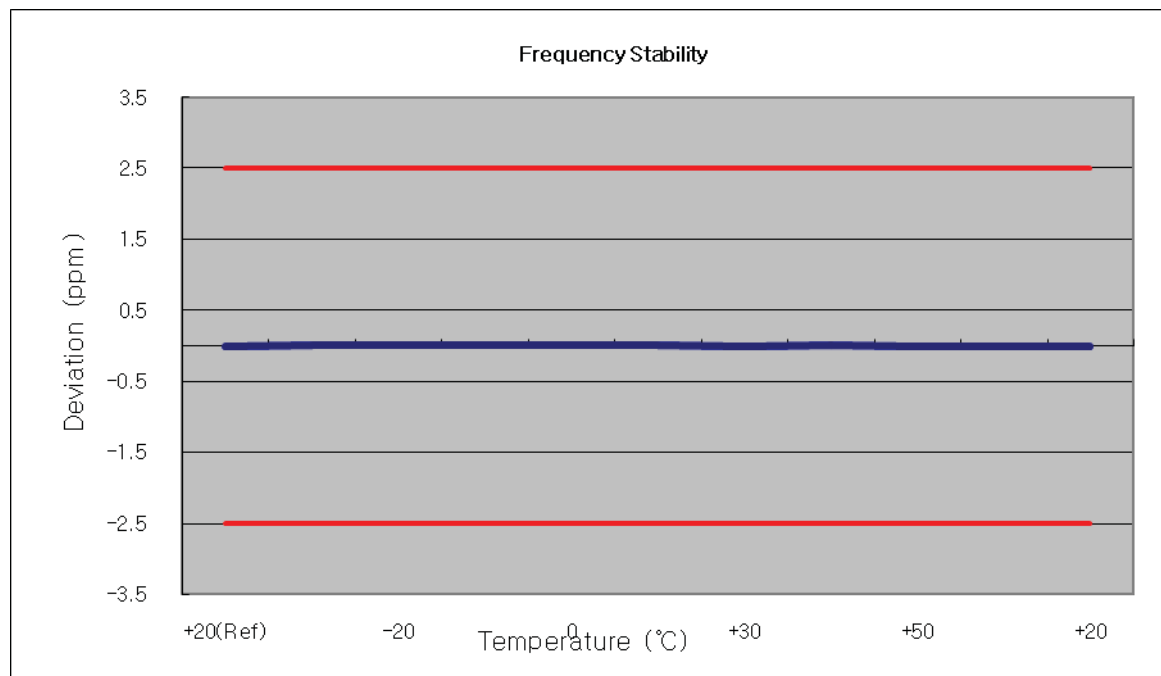


8. TEST PLOTS

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTTTC10F	

BAND 2. Occupied Bandwidth Plot (18900ch_5MHz_QPSK_RB 25_0)



BAND 2. Occupied Bandwidth Plot (18900ch_5MHz_16-QAM_RB 25_0)

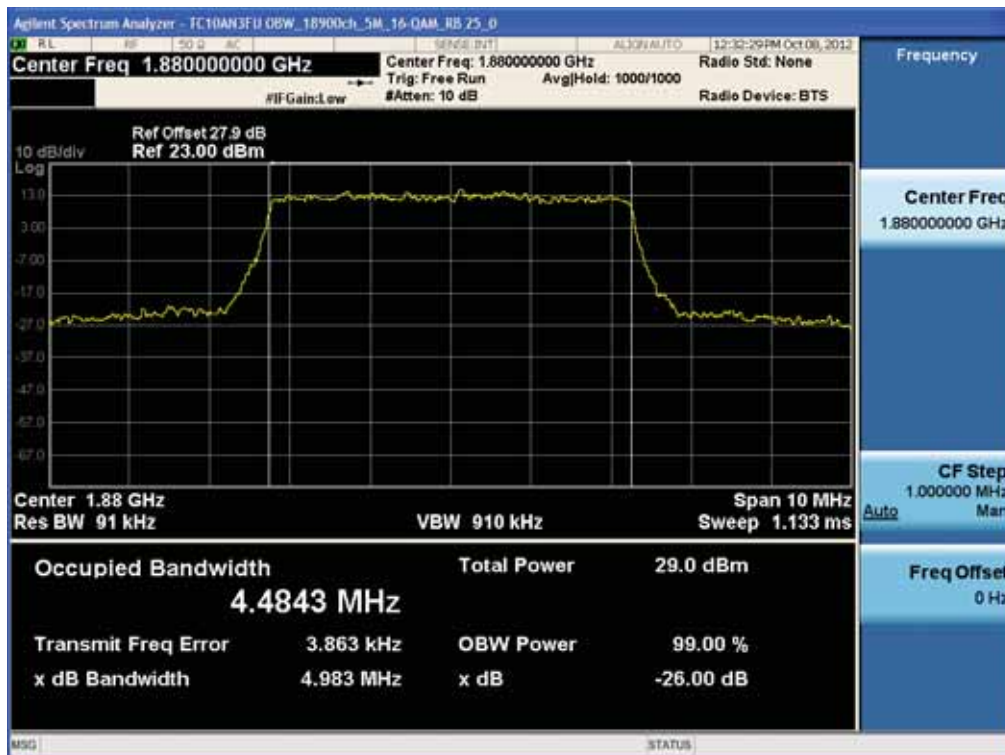


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. Occupied Bandwidth Plot (18900ch_10MHz_QPSK_RB 50_0)

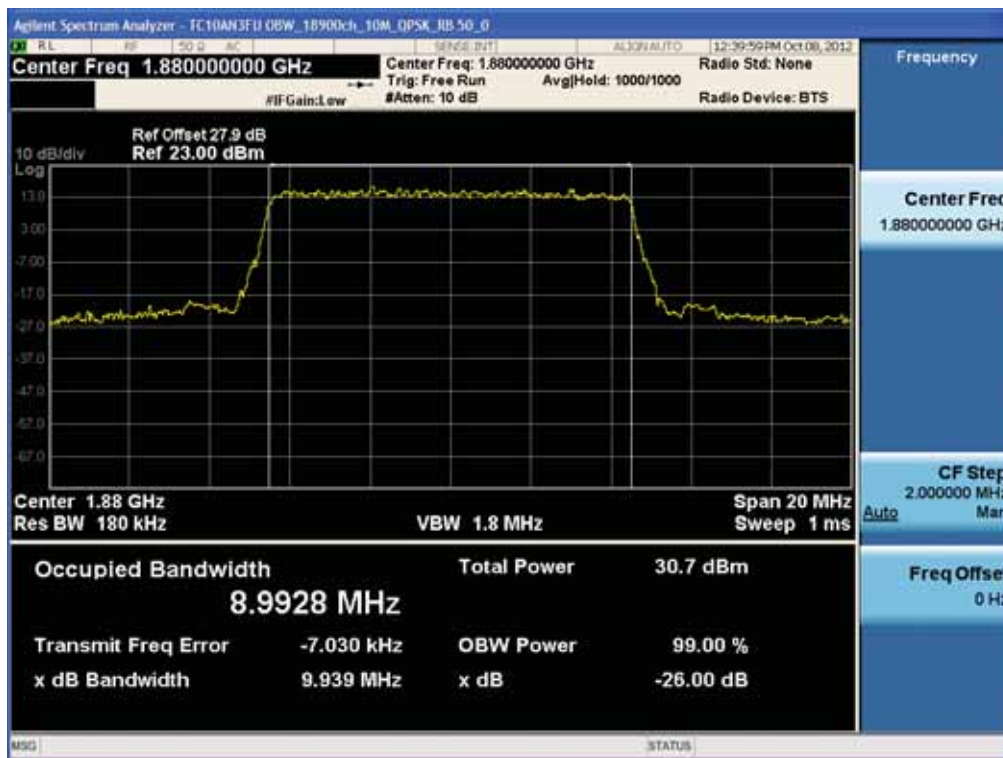


BAND 2. Occupied Bandwidth Plot (18900ch_10MHz_16-QAM_RB 50_0)

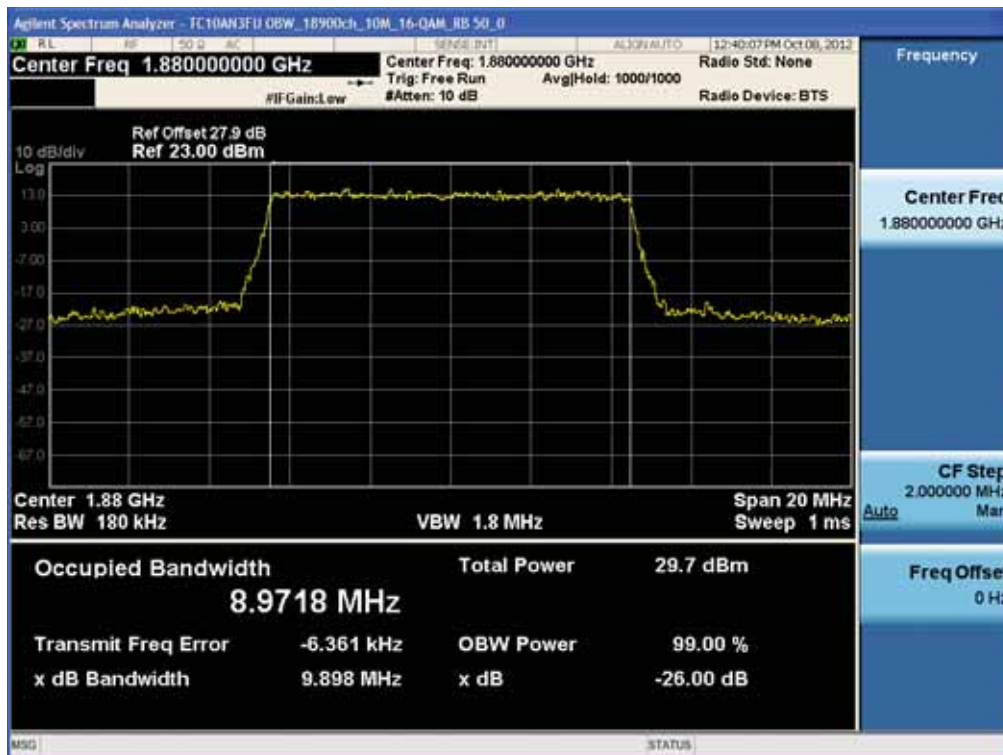


FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr
			FCC ID: BEJLTC10F

BAND 5. Occupied Bandwidth Plot (20525ch_5MHz_QPSK_RB 25_0)

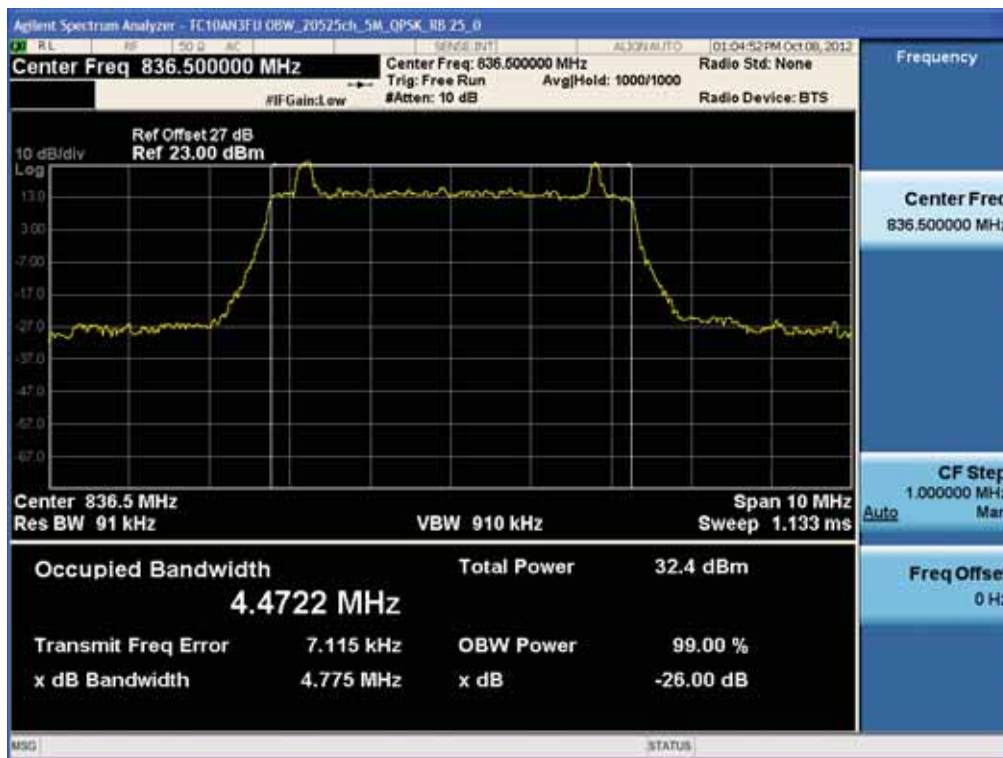


BAND 5. Occupied Bandwidth Plot (20525ch_5MHz_16-QAM_RB 25_0)

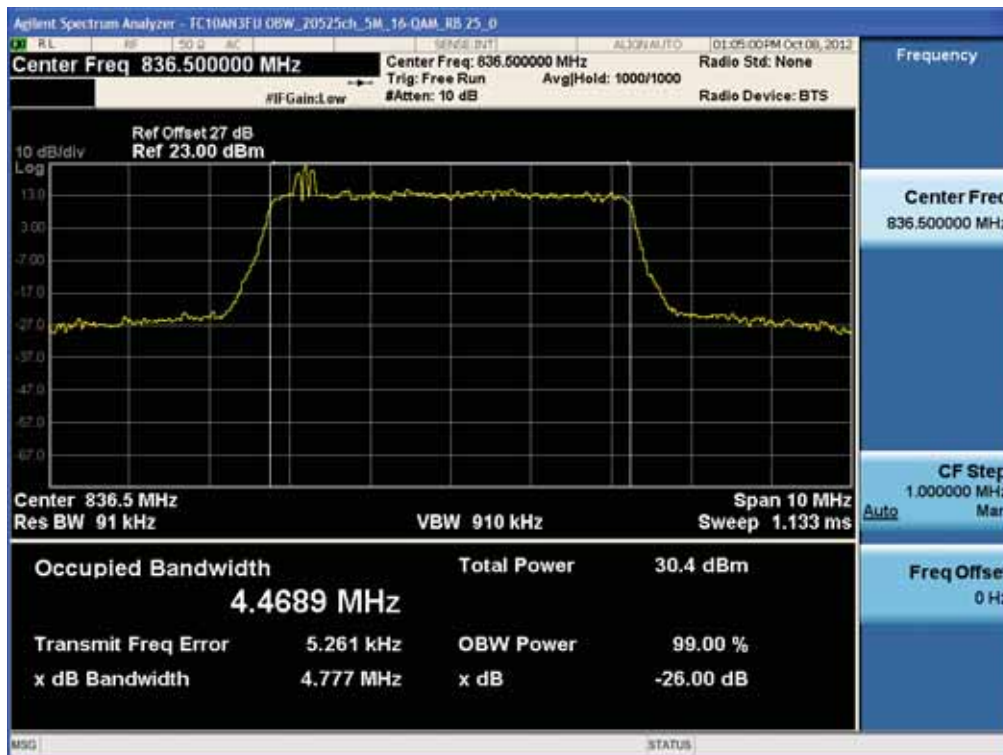

FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	--

BAND 5. Occupied Bandwidth Plot (20525ch_10MHz_QPSK_RB 50_0)

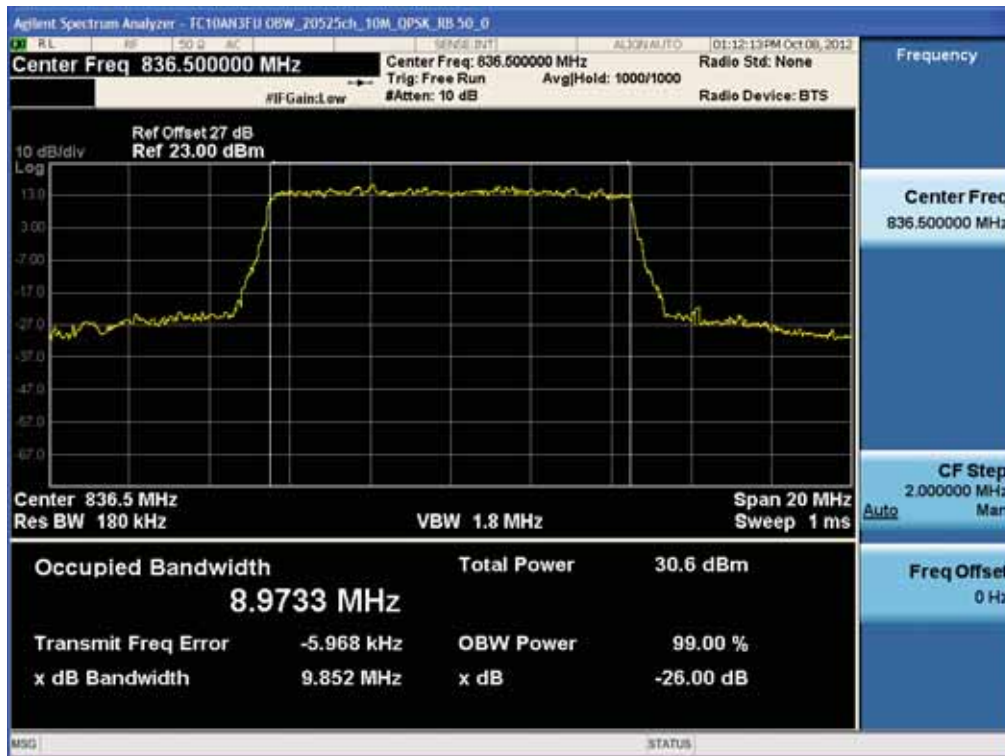

BAND 5. Occupied Bandwidth Plot (20525ch_10MHz_16-QAM_RB 50_0)



FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. PAR (18900ch_5MHz_QPSK_RB 25_0)



BAND 2. PAR (18900ch_5MHz_16-QAM_RB 25_0)

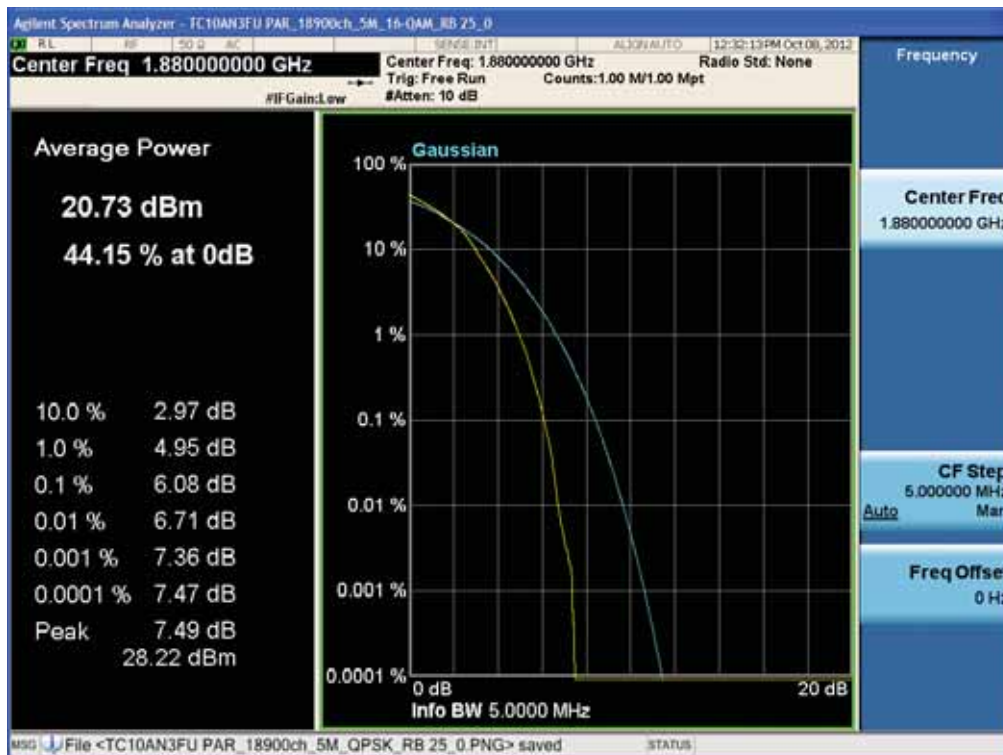

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. PAR (18900ch_10MHz_QPSK_RB 50_0)



BAND 2. PAR (18900ch_10MHz_16-QAM_RB 50_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. Low Band Edge (18625ch_5MHz_QPSK_RB 1_0)



BAND 2. Low Band Edge (18625ch_5MHz_QPSK_RB 25_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTTTC10F
-----------------------------------	-------------------------------------	--	------------------------

BAND 2. Low Band Edge (18650ch_10MHz_QPSK_RB 1_0)



BAND 2. Low Band Edge (18650ch_10MHz_QPSK_RB 50_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTTTC10F
-----------------------------------	-------------------------------------	--	------------------------

BAND 2. Low Extended Band Edge (18625_5MHz_QPSK_RB 25_0)




BAND 2. Low Extended Band Edge (18650_10MHz_QPSK_RB 50_0)



FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr
			FCC ID: BEJLTC10F

BAND 2. High Band Edge (19175ch_5MHz_QPSK_RB 1_24)

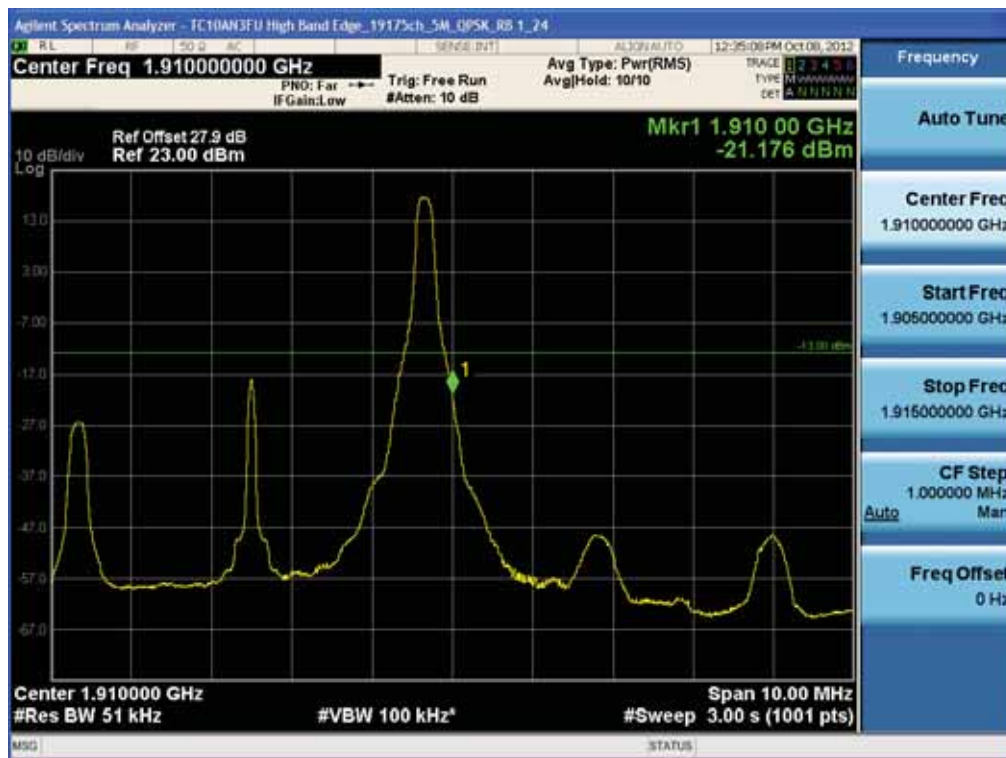

BAND 2. High Band Edge (19175ch_5MHz_QPSK_RB 25_0)



BAND 2. High Band Edge (19150ch_10MHz_QPSK_RB 1_49)



BAND 2. High Band Edge (19150ch_10MHz_QPSK_RB 50_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. High Extended Band Edge (19175_5MHz_QPSK_RB 25_0)




BAND 2. High Extended Band Edge (19150_10MHz_QPSK_RB 50_0)



FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr
			FCC ID: BEJLTC10F

BAND 5. Low Band Edge (20425ch_5MHz_QPSK_RB 1_0)

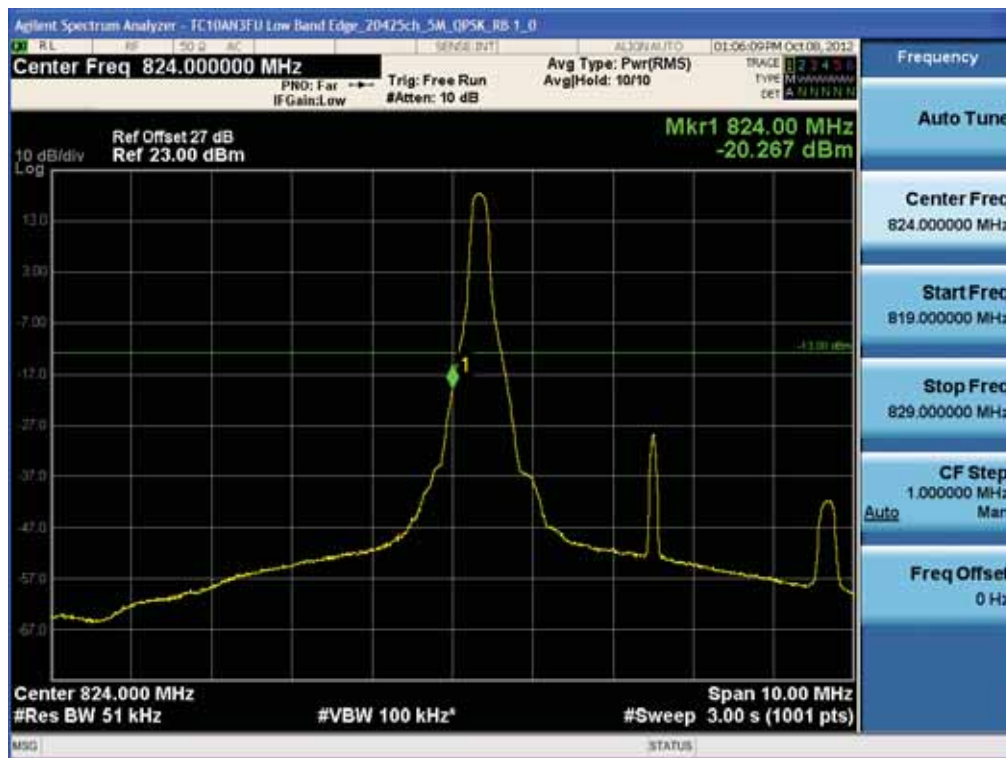

BAND 5. Low Band Edge (20425ch_5MHz_QPSK_RB 25_0)




FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 5. Low Band Edge (20450ch_10MHz_QPSK_RB 1_0)

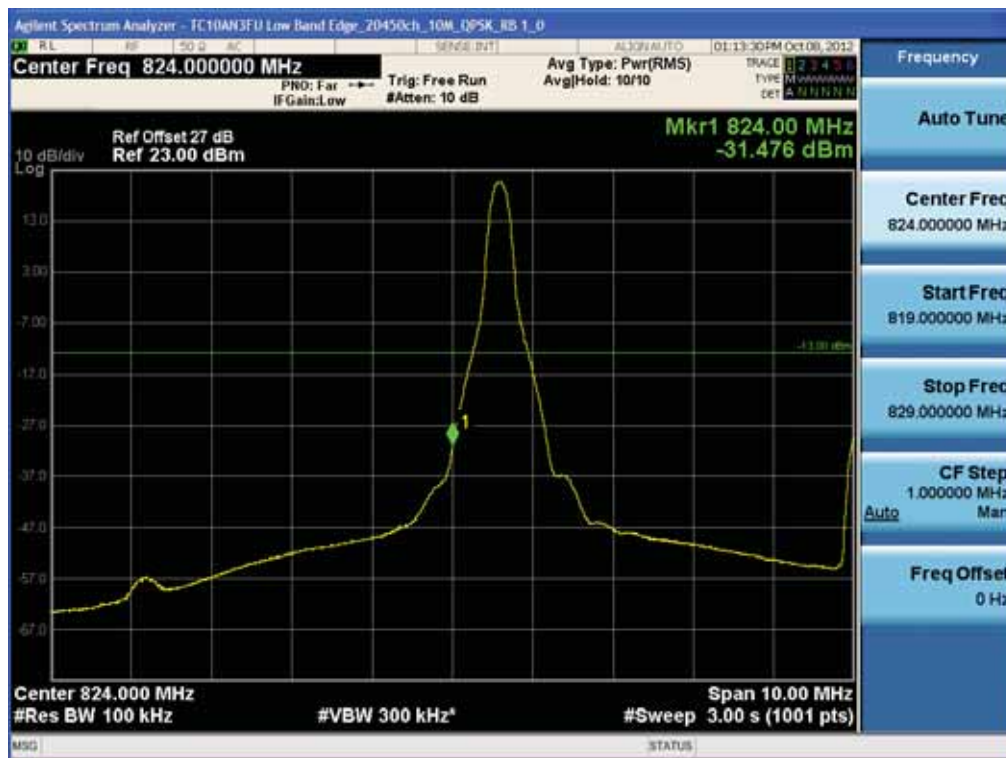

BAND 5. Low Band Edge (20450ch_10MHz_QPSK_RB 50_0)



BAND 5. Low Extended Band Edge (20425ch_5MHz_QPSK_RB 25_0)




BAND 5. Low Extended Band Edge (20450ch_10MHz_QPSK_RB 50_0)



FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	--


BAND 5. High Band Edge (20625ch_5MHz_QPSK_RB 1_24)

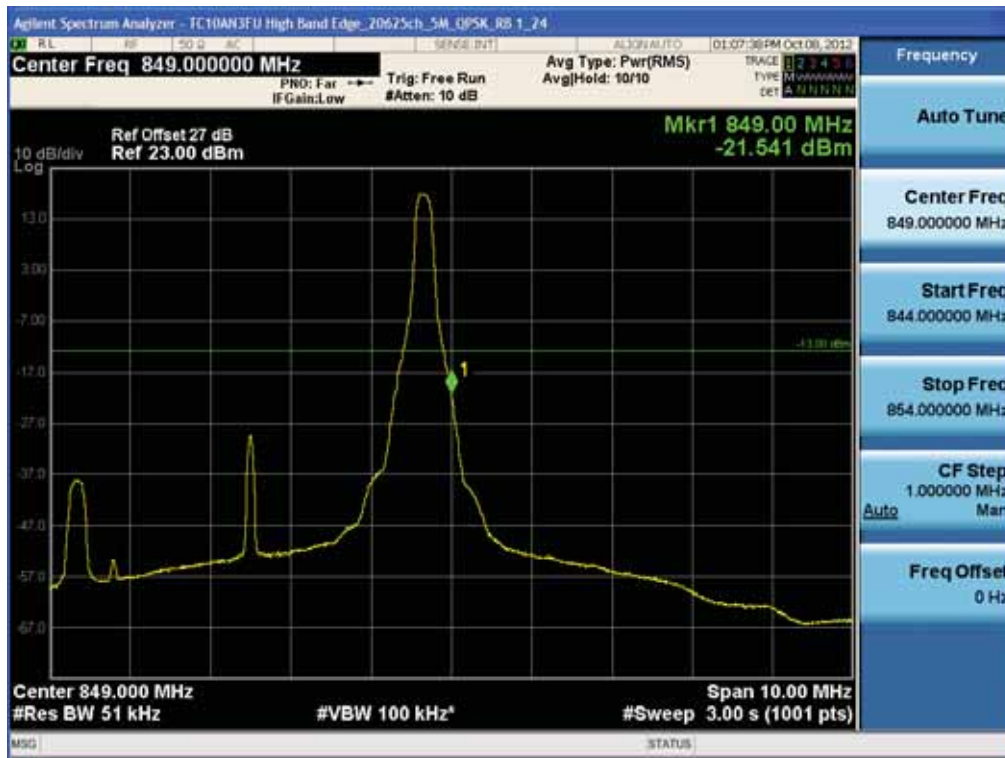

BAND 5. High Band Edge (20625ch_5MHz_QPSK_RB 25_0)



BAND 5. High Band Edge (20600ch_10MHz_QPSK_RB 1_49)

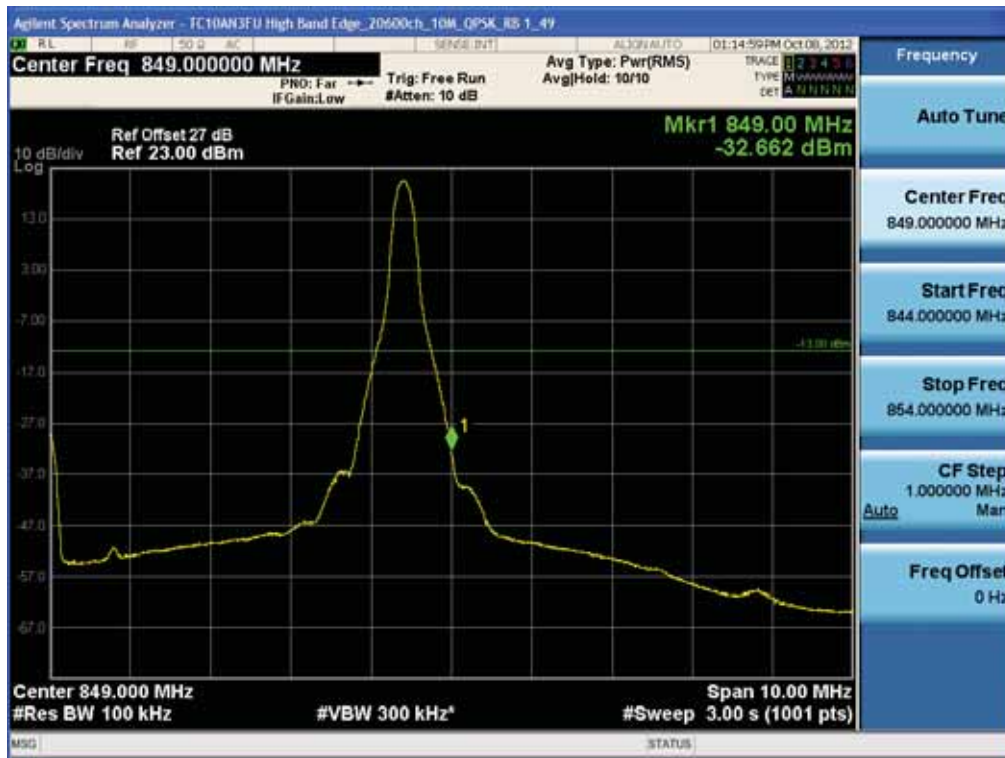

BAND 5. High Band Edge (20600ch_10MHz_QPSK_RB 50_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 5. High Extended Band Edge (20625ch_5MHz_QPSK_RB 25_0)



BAND 5. High Extended Band Edge (20600ch_10MHz_QPSK_RB 50_0)




FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. Conducted Spurious_1 (18625ch_5MHz_QPSK_RB 1_24)

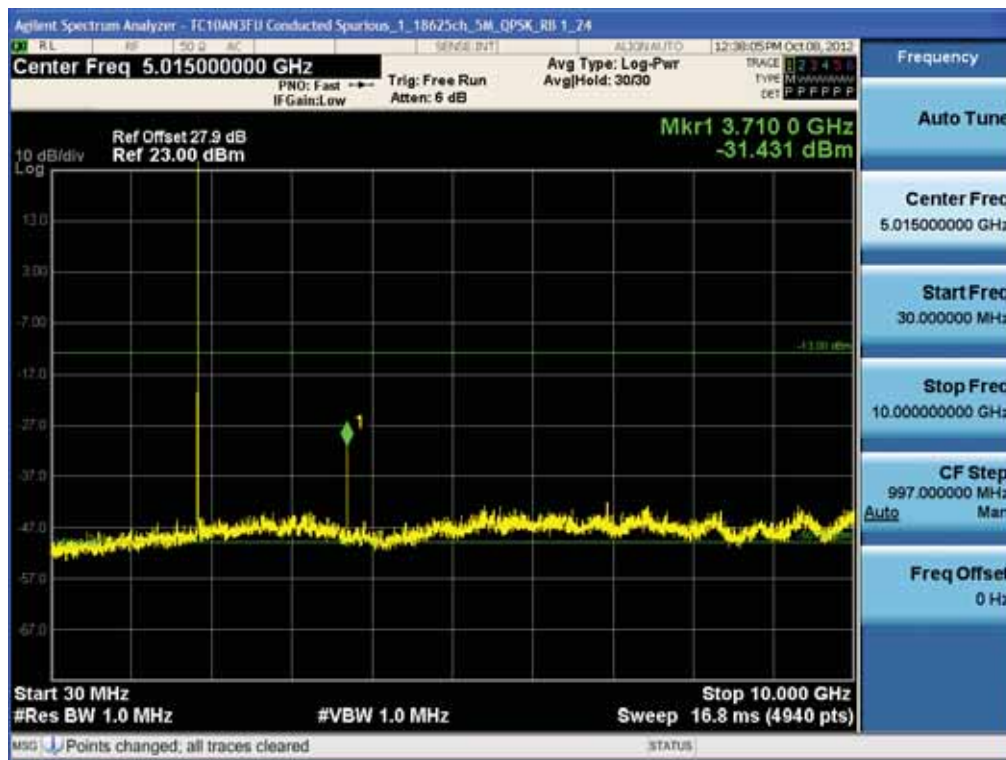


BAND 2. Conducted Spurious_2 (18625ch_5MHz_QPSK_RB 1_24)



FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr
			FCC ID: BEJLTC10F

BAND 2. Conducted Spurious_1 (18900ch_5MHz_QPSK_RB 1_0)

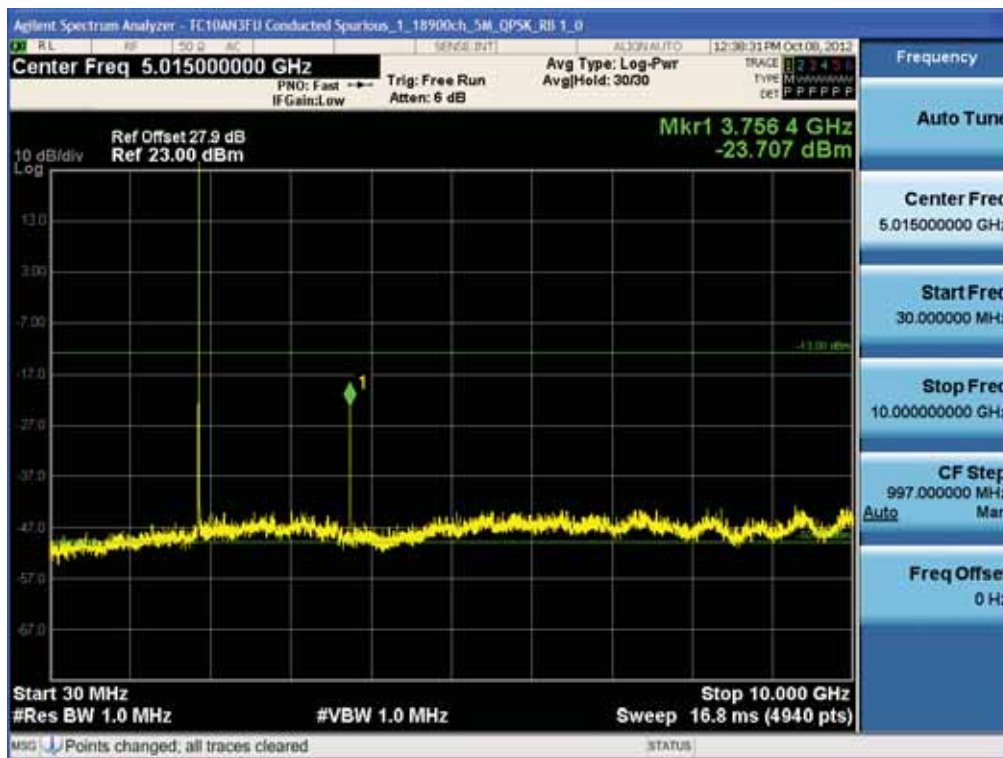

BAND 2. Conducted Spurious_2 (18900ch_5MHz_QPSK_RB 1_0)




FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. Conducted Spurious_1 (19175ch_5MHz_QPSK_RB 1_0)

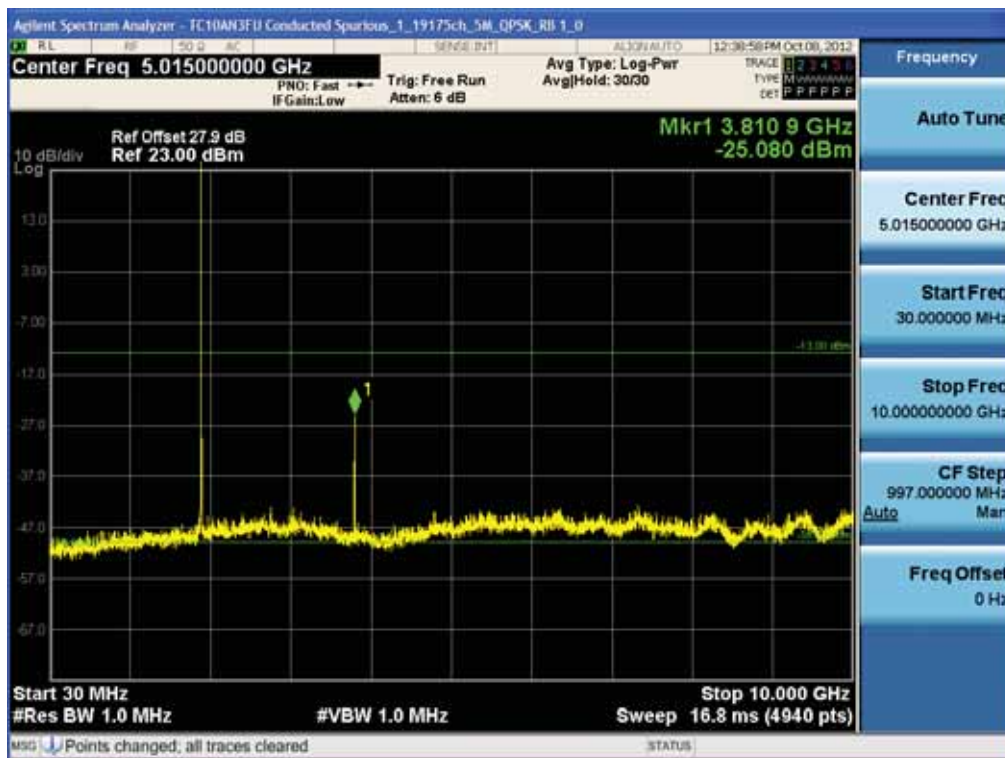


BAND 2. Conducted Spurious_2 (19175ch_5MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	--

BAND 2. Conducted Spurious_1 (18650ch_10MHz_QPSK_RB 1_49)

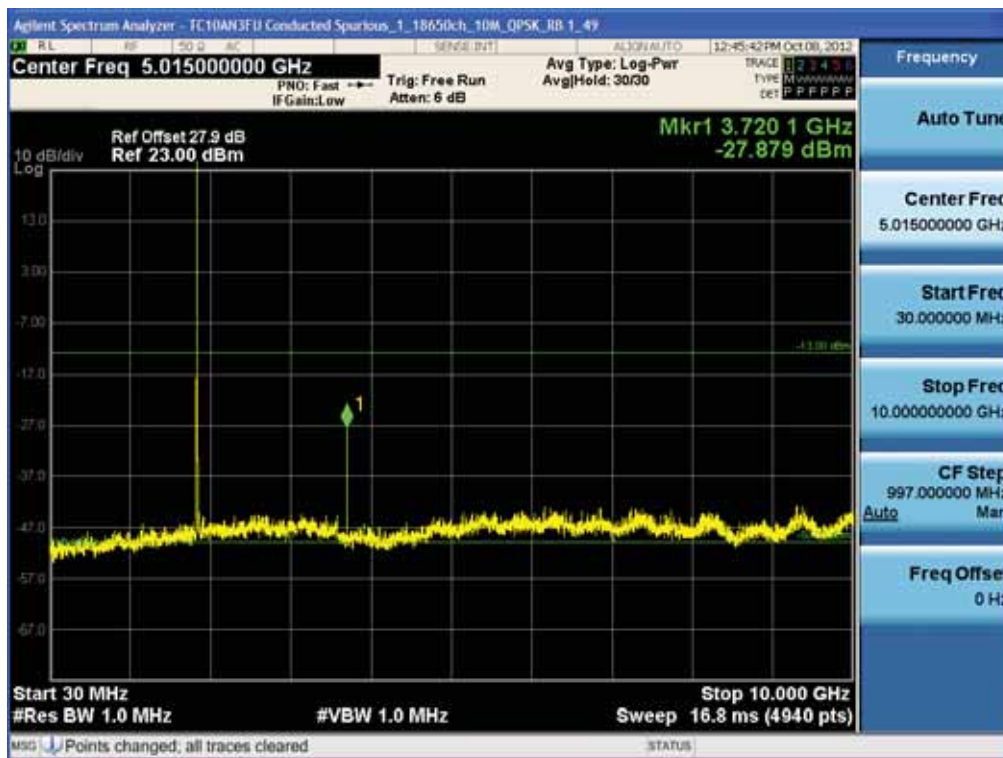

BAND 2. Conducted Spurious_2 (18650ch_10MHz_QPSK_RB 1_49)




FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. Conducted Spurious_1 (18900ch_10MHz_QPSK_RB 1_0)

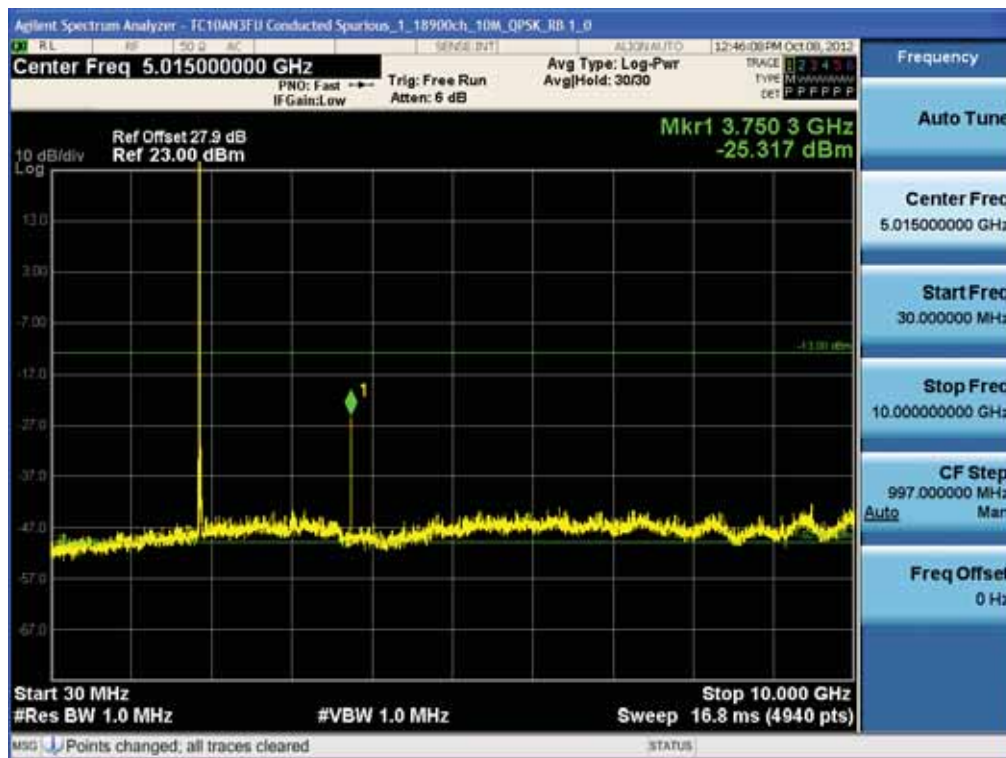

BAND 2. Conducted Spurious_2 (18900ch_10MHz_QPSK_RB 1_0)




FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 2. Conducted Spurious_1 (19150ch_10MHz_QPSK_RB 1_0)

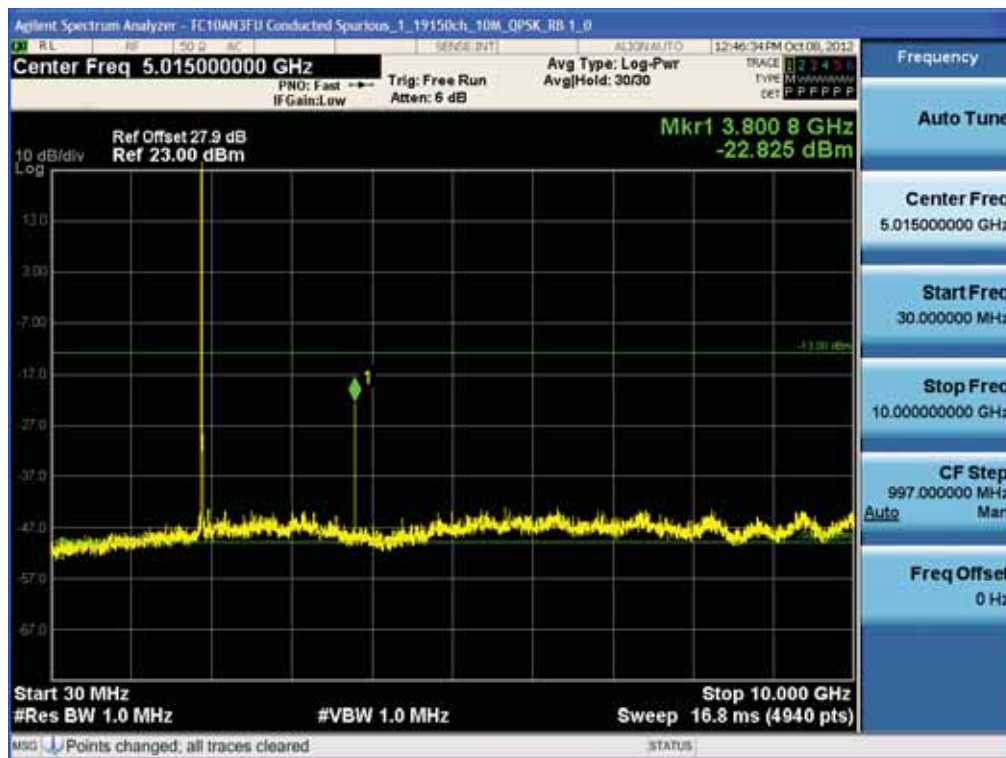

BAND 2. Conducted Spurious_2 (19150ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 5. Conducted Spurious_1 (20425ch_5MHz_QPSK_RB 1_0)



BAND 5. Conducted Spurious_2 (20425ch_5MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 5. Conducted Spurious_1 (20525ch_5MHz_QPSK_RB 1_0)



BAND 5. Conducted Spurious_2 (20525ch_5MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	www.hct.co.kr
			FCC ID: BEJLTC10F

BAND 5. Conducted Spurious_1 (20625ch_5MHz_QPSK_RB 1_0)



BAND 5. Conducted Spurious_2 (20625ch_5MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 5. Conducted Spurious_1 (20450ch_10MHz_QPSK_RB 1_49)



BAND 5. Conducted Spurious_2 (20450ch_10MHz_QPSK_RB 1_49)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 5. Conducted Spurious_1 (20525ch_10MHz_QPSK_RB 1_0)



BAND 5. Conducted Spurious_2 (20525ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------

BAND 5. Conducted Spurious_1 (20600ch_10MHz_QPSK_RB 1_0)



BAND 5. Conducted Spurious_2 (20600ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1210FR11-3	Date of Issue: November 14, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Telematics with Bluetooth/WLAN	FCC ID: BEJLTC10F
-----------------------------------	-------------------------------------	--	----------------------