



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8539 FAX : +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

Applicant:

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea

Date of Issue: February 02, 2010

Test Report No.: HCTE1002FE01

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJLUM900D

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B

Equipment (EUT) Type : Cellular/PCS GSM/EDGE Module

Trade Name / Model(s) : LG Electronics Inc. / LUM-900D

Port / Connector(s) : DC In Port / USB Data Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

Report prepared by
: Dong Sup Kim
Test Engineer of EMC Tech. Part

Approved by
: Nam Wook Kang
Manager of EMC Tech. Part

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details	4
1.4 Cable description	5
1.5 Noise suppression parts on cable. (I/O cable)	5
1.6 Test methodology	6
1.7 Test facility	6
1.8 Frequency Range of Radiated Measurements	6
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	7
3. PRELIMINARY TEST	
3.1 Conducted Emission test	8
3.2 Radiated Emission test	8
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	9
4.2 Radiated Emission test	14
5. FIELD STRENGTH CALCULATION	15
6. TEST EQUIPMENT	16
7. CONCLUSION	17

ATTACHMENT : TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

The **LG Electronics Inc. Model: LUM-900D, Cellular/PCS GSM/EDGE Module.**

Its basic purpose is used for communications. It transmits from GSM 850 (824.20 MHz to 848.80 MHz), GSM 1 900 (1 850.20 MHz to 1 909.80 MHz) and receives from GSM 850 (869.20 MHz to 893.80 MHz), GSM 1 900 (1 930.20 MHz to 1 989.80 MHz).

Model	LUM-900D
FCC ID	BEJLUM900D
E.U.T Type	Cellular/PCS GSM/EDGE Module
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Part Number	FCC ID / DoC	Connected To
Cellular/PCS GSM/ EDGE Module	LG	LUM-900D	BEJLUM900D	Notebook PC
Travel adaptor	Phihong Electronics Co.,Ltd.	PSA15R-D50P	-	E.U.T
JIG	LG	-	-	E.U.T, TA Notebook PC
Notebook PC	SAMSUNG	NT-R519	DoC	E.U.T
Notebook PC adaptor	DELTA	ADP-60ZH D AD-6019R	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
Cellular/PCS GSM/EDGE Module	DC in	N	-	(P)1.8
	USB data	-	Y	(D)1.0
	USB data	N	Y	(D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/EDGE Module	DC in	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Ichon-si, Kyoungki-do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

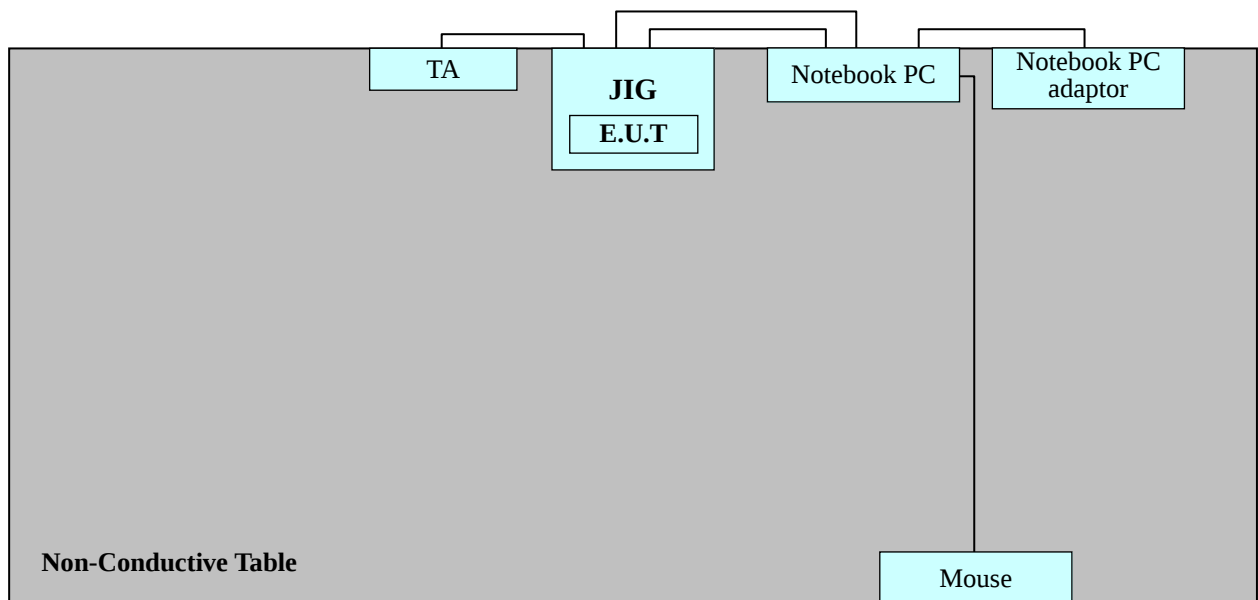

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Idle (850, 1 900)	
Data Link	○

3.2 Radiated Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Idle (850, 1 900)	
Data Link	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 18.6 dB
Operating condition	: Data Link mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 18.6 °C
Humidity level	: 38.8 %
Test date	: February 02, 2010

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.1780	35.2	HOT	Average	55.0	19.4
0.3420	30.6	NEUTRAL	Average	49.0	18.6
1.0720	34.1	NEUTRAL	Quasi-Peak	56.0	21.9
1.0800	35.1	HOT	Quasi-Peak	56.0	20.9

※ **NOTE:** Refer to page 10 to page 13 for details.

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. Line H = Hot, Line N = Neutral


HCT

EMC

EUT: LUM-900D
Manufacturer: LG Electronics INC.
Operating Condition: Normal Mode
Test Site: SHIELD ROOM
Operator: DS-KIM
Test Specification: CISPR22 CLASS B
Comment: H

SCAN TABLE: "CISPR22 CLASS B"

Short Description:			CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

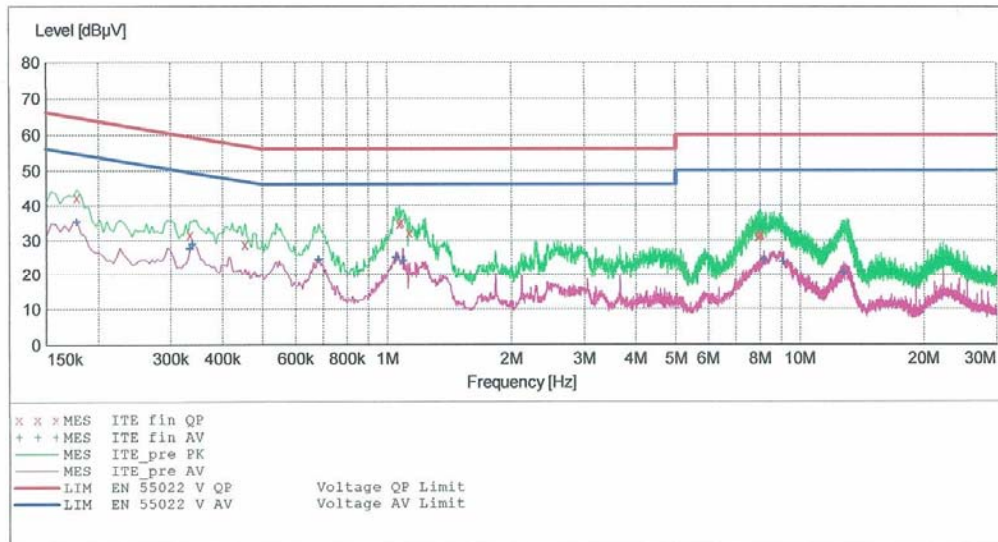

MEASUREMENT RESULT: "ITE_fin QP"

2/2/2010 1:37PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.178001	42.30	10.1	65	22.3	---	---
0.334001	31.60	10.1	59	27.8	---	---
0.454001	28.80	10.1	57	28.0	---	---
1.072000	34.80	10.1	56	21.2	---	---
1.080000	35.10	10.1	56	20.9	---	---
1.132000	32.20	10.1	56	23.8	---	---
7.936000	31.00	10.6	60	29.0	---	---
8.012000	31.40	10.6	60	28.6	---	---
8.048000	31.70	10.6	60	28.3	---	---

MEASUREMENT RESULT: "ITE_fin AV"

2/2/2010 1:37PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.178001	35.20	10.1	55	19.4	---	---
0.334001	27.50	10.1	49	21.9	---	---
0.338001	28.80	10.1	49	20.4	---	---
0.684000	24.30	10.1	46	21.7	---	---
1.052000	24.90	10.1	46	21.1	---	---
1.092000	24.00	10.1	46	22.0	---	---
8.176000	24.30	10.6	50	25.7	---	---
9.120000	23.70	10.6	50	26.3	---	---
12.752000	20.50	10.9	50	29.5	---	---


HCT

EMC

EUT: LUM-900D
Manufacturer: LG Electronics INC.
Operating Condition: Normal Mode
Test Site: SHIELD ROOM
Operator: DS-KIM
Test Specification: CISPR22 CLASS B
Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Short Description:			CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

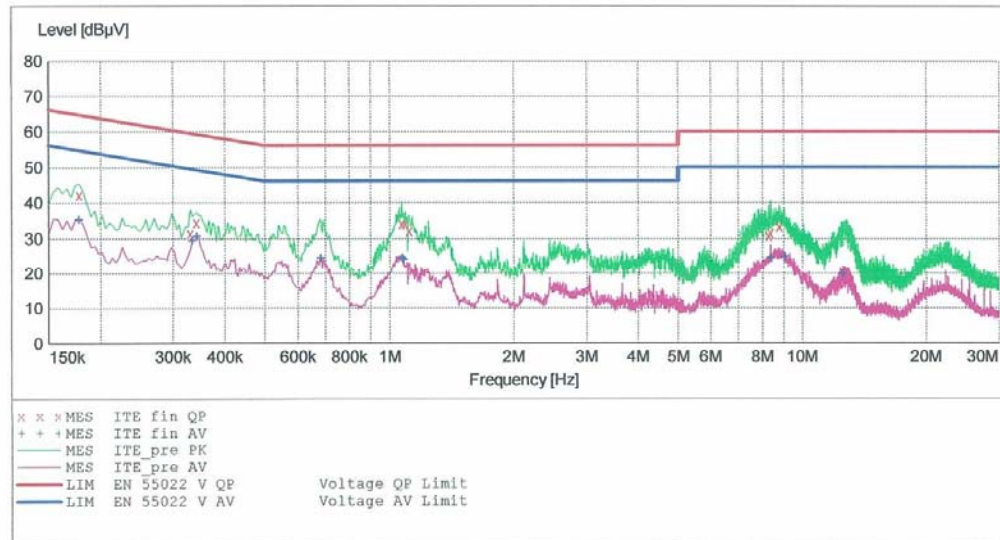

MEASUREMENT RESULT: "ITE_fin QP"

2/2/2010 1:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.178001	42.10	10.1	65	22.5	---	---
0.330001	31.40	10.1	60	28.0	---	---
0.342001	34.40	10.1	59	24.8	---	---
1.072000	34.10	10.1	56	21.9	---	---
1.092000	34.10	10.1	56	21.9	---	---
1.116000	32.10	10.1	56	23.9	---	---
8.288000	30.80	10.6	60	29.2	---	---
8.384000	31.60	10.6	60	28.4	---	---
8.788000	33.40	10.6	60	26.6	---	---

MEASUREMENT RESULT: "ITE_fin AV"

2/2/2010 1:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.178001	35.20	10.1	55	19.4	---	---
0.334001	29.40	10.1	49	19.9	---	---
0.342001	30.60	10.1	49	18.6	---	---
0.684000	24.50	10.1	46	21.5	---	---
1.076000	24.40	10.1	46	21.6	---	---
1.084000	24.00	10.1	46	22.0	---	---
8.376000	24.40	10.6	50	25.6	---	---
9.088000	24.90	10.6	50	25.1	---	---
12.544000	19.80	10.9	50	30.2	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 4.4 dB
Operating condition	: Data Link mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 12.3 °C
Humidity level	: 38.5 %
Test date	: February 02, 2010

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
30.8	19.1	11.2	0.7	V	31.0	40.0	9.0
67.8	20.5	10.7	0.9	H	32.1	40.0	7.9
70.0	23.4	10.2	0.9	V	34.5	40.0	5.5
126.3	26.7	11.2	1.2	V	39.1	43.5	4.4
289.0	17.9	12.7	1.8	H	32.4	46.0	13.6
289.0	20.5	12.7	1.8	V	35.0	46.0	11.0

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>			
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	2010.06.02
☒ LISN	Rohde & Schwarz	ESH3-Z5	2010.02.06
☒ LISN	Rohde & Schwarz	ENV216	2010.04.01
☒ Attenuator	Rohde & Schwarz	ESH3-Z2	2010.10.30
<u>Radiated Emission</u>			
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	2010.10.30
☒ Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
☒ Antenna Master	HD	MA240	-
☒ Turn Table	EMCO	1060	-
☐ Communication Antenna	TDK	LPDA-0802	-
☐ Antenna Position Tower	HD	240/520/00	-
☐ Base Station	Rohde & Schwarz	CMU 200	2010.02.17
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
☒ RF-Amplifier	MITEQ	AMF-6D-00101800-35.20P.PS	2010.04.25
☐ Bluetooth Base Station	TESCOM	TC-3000A	2011.01.07

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: LUM-900D. Cellular/ PCS GSM/ EDGE Module. FCC ID: BEJLUM900D** complies with §15.107 and §15.109 of the FCC rules.