

RF TEST REPORT

Test item : MIB2 Entry
Model No. : MIB2
Order No. : DEMC1312-03906
Date of receipt : 2013-12-19
Test duration : 2013-12-31 ~ 2014-01-20
Date of issue : 2014-02-24
Use of report : FCC Original Grant

Applicant : LG Electronics USA.
1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

Test laboratory : Digital EMC Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 449-935

Test specification : FCC Part 15 Subpart C.247
Test environment : See appended test report
Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
ChulMin Kim

Reviewed by:



General Manager
GeunKi Son

Test Report Version

Test Report No.	Date	Description
DRTFCC1402-0271	Feb. 24, 2014	Initial issue

Table of Contents

1.General Information	5
1.1 Testing Laboratory.....	5
1.2 Details of Applicant	5
1.3 Description of EUT	5
1.4. Declaration by the manufacturer	6
1.5. Information about the FHSS characteristics:.....	7
1.6. Test Equipment List.....	8
1.7. Summary of Test Results	9
1.8 Conclusion of worst-case and operation mode	10
2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	11
2.1. Test Setup.....	11
2.2. Limit	11
2.3. Test Procedures.....	12
2.3.1. Test Procedures for Radiated Spurious Emissions	12
2.3.2. Test Procedures for Conducted Spurious Emissions	12
2.4. Test Results.....	13
2.4.1Radiated Emission	13
2.4.2 Conducted Spurious Emissions	37
3. Carrier Frequency Separation.....	157
3.1.Test Setup	157
3.2. Limit	157
4.Number of Hopping Frequencies	197
4.1.Test Setup	197
4.2. Limit	197
5. 20dBc BW.....	269
5.1. Test Setup.....	269
5.2. Limit	269
5.3. Test Procedure.....	269
5.4. Test Results	269
6. Time of Occupancy (Dwell Time).....	317
6.1. Test Setup.....	317
6.2. Limit	317
6.3. Test Procedure.....	317
6.4. Test Results.....	317
7. Maximum Peak Output Power Measurement	357
7.1. Test Setup.....	357
7.2. Limit	357
7.3. Test Procedure	357

7.4. Test Results.....	358
8. Transmitter AC Power Line Conducted Emission	406
8.1. Test Setup.....	406
8.2. Limit.....	406
8.3. Test Procedures	406
8.4. Test Results: N/A	406
9. Antenna Requirement	407
10. Occupied Bandwidth(99%).....	408
APPENDIX I	409

1. General Information

1.1 Testing Laboratory

Digital EMC Co., Ltd.

42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 449-935

www.digitalemc.com

Telephone : + 82-31-321-2664

FAX : + 82-31-321-1664

1.2 Details of Applicant

Applicant : LG Electronics USA.

Address : 1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

Contact person : Jacob Cho

Phone No. : +201-816-2003

1.3 Description of EUT

Product	MIB2 Entry
Model Name	MIB2, L40VW2, L40VW2-R77N, L40VW2-R71N, L40VW2-R72N, L40VW2-C97R, L40VW2-C98R, L40VW2-C91N, L40VW2-C92N, L42VW2, L42VW2-R77N, L42VW2-R71N, L42VW2-R72N, L41VW2, L41VW2-C94R, L41VW2-C98R, L41VW2-C91N, L41VW2-C95N, L41VW2-C97R, L53VW2, L53VW2-R77N, L53VW2-R71N, L53VW2-R72N, L53VW2-C97R, L53VW2-C98R, L53VW2-C91N, L53VW2-C92N, L40SK2, L40SK2-R97N, L40SK2-R98N, L40SK2-R94N, L40SK2-R96N, L41SK2, L41SK2-R97N, L41SK2-R97M, L41SK2-R98N, L41SK2-R98M, L41SK2-R94N, L41SK2-R96N, L52SK2, L52SK2-R97N, L52SK2-R98N, L52SK2-R94N, L52SK2-R96N, L40SE2, L40SE2-R77G, L40SE2-R78G, L40SE2-R74G, L40SE2-R76G, L40SE2-R97H, L40SE2-R97D, L40SE2-R98H, L40SE2-R98D ※ 53 models are quite similar. ※ Please refer to next page (1.4. Declaration by the manufacturer) for detail information.
Serial Number	Identical prototype
Power Supply	DC 12V
Frequency Range	2402 MHz ~ 2480MHz
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channels	79
Antenna Type	Internal Antenna
Antenna Gain	PK :3.50dBi

1.4. Declaration by the manufacturer

MIB2's model name will be derivate by function accordance following table shown below

Model Name			Feature									LCD	TEST
	Model Separation depends on Front board changes		SD	Aux	USB	CD	BT	DAB	RVC	CB	ML		
MIB2	L40VW2	L40VW2-R77N	x	B	x		x			x		Mono	
		L40VW2-R71N	x	B									
		L40VW2-R72N	x	B				x					
		L40VW2-C97R	x	B	x	x	x		x	x		Color	Applied
		L40VW2-C98R	x	B	x	x	x	x	x	x			
		L40VW2-C91N	x	B		x							
		L40VW2-C92N	x	B		x		x					
	L42VW2	L42VW2-R77N	x	B	x		x			x		Mono	Applied
		L42VW2-R71N	x	B									
		L42VW2-R72N	x	B				x					
	L41VW2	L41VW2-C94R	x	B	x	x	x			x		Color	
		L41VW2-C98R	x	B	x	x	x	x		x			Applied
		L41VW2-C91N	x	B		x							
		L41VW2-C95N	x	B		x		x					
		L41VW2-C97R	x	B	x	x	x		x				
	L53VW2	L53VW2-R77N	x	B	x		x			x		Mono	
		L53VW2-R71N	x	B									
		L53VW2-R72N	x	B				x					
		L53VW2-C97R	x	B	x	x	x			x		Color	
		L53VW2-C98R	x	B	x	x	x	x		x			Applied
		L53VW2-C91N	x	B		x							
		L53VW2-C92N	x	B		x		x					
	L40SK2	L40SK2-R97N	x	Q	x		x		x			Color	
		L40SK2-R98N	x	Q	x		x	x	x				Applied
		L40SK2-R94N	x	Q	x								
		L40SK2-R96N	x	Q	x			x					
	L41SK2	L41SK2-R97N	x	Q	x		x					Color	
		L41SK2-R97M	x	Q	x		x				x		
		L41SK2-R98N	x	Q	x		x	x					Applied
		L41SK2-R98M	x	Q	x		x	x			x		
		L41SK2-R94N	x	Q	x								
		L41SK2-R96N	x	Q	x			x					
	L52SK2	L52SK2-R97N	x	Q	x		x		x			Color	
		L52SK2-R98N	x	Q	x		x	x	x				Applied
		L52SK2-R94N	x	Q	x				x				
		L52SK2-R96N	x	Q	x			x	x				
	L40SE2	L40SE2-R77G	x	Q	x		x					Mono	
		L40SE2-R78G	x	Q	x		x	x					
		L40SE2-R74G	x	Q	x								
		L40SE2-R76G	x	Q	x			x					
		L40SE2-R97H	x	Q	x		x					Color	
		L40SE2-R97D	x	Q	x		x						
		L40SE2-R98H	x	Q	x		x	x					
		L40SE2-R98D	x	Q	x		x	x	x				Applied

1.5. Information about the FHSS characteristics:

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	N9020A	13/03/28	14/03/28	MY50510026
Spectrum Analyzer	Agilent	E4440A	13/09/16	14/09/16	MY45304199
Spectrum Analyzer	Agilent	FSQ26	13/02/14	14/02/14	200445
MXA Signal Analyzer	Agilent	N9020A	13/09/24	14/09/24	MY50200867
Digital Multimeter	H.P	34401A	13/02/27	14/02/27	3146A13475
Vector Signal Generator	Rohde Schwarz	SMJ100A	14/01/07	15/01/07	100148
Signal Generator	Rohde Schwarz	SMF100A	13/07/22	14/07/22	102341
Thermo hygrometer	BODYCOM	BJ5478	13/06/01	14/06/01	120612-2
DC Power Supply	SM techno	SDP30-5D	13/10/10	14/10/10	305DMG305
High-pass filter	Wainwright	WHKX3.0	13/09/12	14/09/12	9
LOOP Antenna	Schwarzbeck	FMZB1513	12/09/24	14/09/24	1513-128
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
Horn Antenna	ETS	3115	13/02/28	15/02/28	00021097
HORN ANT	A.H.Systems	SAS-574	13/03/20	15/03/20	154
Amplifier (22dB)	H.P	8447E	14/01/07	15/01/07	2945A02865
Amplifier (30dB)	Agilent	8449B	13/02/27	14/02/27	3008A00370
EMI TEST RECEIVER	R&S	ESU	14/01/07	15/01/07	100014

1.7. Summary of Test Results

FCC Part RSS-210 & GEN	Parameter	Limit (Using in 2400~ 2483.5MHz)	Test Condition	Status Note 1
15.247(a) RSS-210(A8.1)	Carrier Frequency Separation	>= 20dB BW or >= Two-Thirds of the 20dB BW	Conducted	C
	Number of Hopping Frequencies	>= 15 hops		C
	20 dB Bandwidth	None		C
	Dwell Time	=< 0.4 seconds		C
15.247(b) RSS-210(A8.4)	Transmitter Output Power	=< 1Watt , if CHs >= 75 Others =<0.125W		C
15.247(d) RSS-210(A8.5)	Band-edge	The radiated emission to any 100 kHz of out-band shall be at least 20dB below the highest in-band spectral density.		C
	Conducted Spurious Emissions			C
RSS Gen	Occupied Bandwidth (99 %)	RSS-Gen(4.6.1)		NA
15.205 15.209 RSS-210(A8.5)	RadiatedEmissions	FCC 15.209 Limits	Radiated	C Note. 3
15.207 RSS-Gen(7.2.4)	AC Conducted Emissions	FCC 15.207 Limits	AC Line Conducted	NA Note.2
15.203 RSS-Gen(7.1.2)	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: This device is installed in a car. Therefore the power source is a battery of car. Note 3:The sample was tested according to the following specification: ANSI C63.4-2009, DA00-705				

1.8 Conclusion of worst-case and operation mode

The EUT has three type of modulation (GFSK, $\pi/4$ DQPSK, 8DPSK).

Therefore all applicable requirements were tested with all the modulations.

The field strength of spurious emission was measured in three orthogonal EUT positions(X-axis, Y-axis and Z-axis).

Tested frequency information,

- Hopping Function: Enable

	TXFrequency(MHz)	RX Frequency(MHz)
Hopping Band	2402 ~ 2480	2402 ~ 2480

- Hopping Function: Disable

	TXFrequency(MHz)	RX Frequency(MHz)
Lowest Channel	2402	2402
Middle Channel	2441	2441
Highest Channel	2480	2480

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

2.1. Test Setup

Refer to the APPENDIX I.

2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	608 ~ 614	3345.8 ~ 3358		
		960 ~ 1240	3600 ~ 4400		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the DA 00-705 and ANSI C63.4:2009

2.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE ;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz for Average detection (AV) at frequency above 1 GHz.

2.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

Frequency range: 30MHz~10GHz, 10GHz~25GHz

RBW= 1MHz, VBW= 3MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, Sweep point :30001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2 . (RBW = 100 KHz , VBW = 300 KHz)

4. If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 KHz, VBW = 300KHz, SAPN = 100 MHz and BINS = 2001 to get accurate emission level within 100 KHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

2.4. Test Results

Ambient temperature : 22°C
Relative humidity : 45%

2.4.1 Radiated Emission

- L40SE2

9kHz ~ 25GHz Data(Modulation: GFSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.49	H	X	PK	47.68	-3.38	-	-	44.30	74.00	29.70
2389.84	H	X	AV	35.34	-3.38	-	-	31.96	54.00	22.04
4804.19	H	X	PK	45.74	5.39	-	-	51.13	74.00	22.87
4804.04	H	X	AV	33.93	5.39	-24.58	-	14.74	54.00	39.26

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.94	H	X	PK	45.34	5.67	-	-	51.01	74.00	22.99
4881.95	H	X	AV	32.90	5.67	-24.58	-	13.99	54.00	40.01

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.72	H	X	PK	47.64	-2.79	-	-	44.85	74.00	29.15
2483.50	H	X	AV	34.85	-2.79	-	-	32.06	54.00	21.94
4959.73	H	X	PK	44.84	6.04	-	-	50.88	74.00	23.12
4959.86	H	X	AV	32.91	6.04	-24.58	-	14.37	54.00	39.63

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90\text{ms} / 100\text{ms}) = -24.58$ dB

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.38	H	X	PK	47.96	-3.38	-	-	44.58	74.00	29.42
2389.94	H	X	AV	35.47	-3.38	-	-	32.09	54.00	21.91
4803.96	H	X	PK	45.19	5.39	-	-	50.58	74.00	23.42
4803.93	H	X	AV	34.21	5.39	-24.58	-	15.02	54.00	38.98

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.05	H	X	PK	45.53	5.67	-	-	51.20	74.00	22.80
4882.05	H	X	AV	33.00	5.67	-24.58	-	14.09	54.00	39.91

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.56	H	X	PK	47.43	-2.79	-	-	44.64	74.00	29.36
2483.80	H	X	AV	35.03	-2.79	-	-	32.24	54.00	21.76
4959.97	H	X	PK	45.52	6.04	-	-	51.56	74.00	22.44
4959.99	H	X	AV	32.71	6.04	-24.58	-	14.17	54.00	39.83

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

9kHz ~ 25GHz Data(Modulation: 8DPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.35	H	X	PK	47.18	-3.38	-	-	43.80	74.00	30.20
2389.12	H	X	AV	34.61	-3.38	-	-	31.23	54.00	22.77
4804.06	H	X	PK	45.13	5.39	-	-	50.52	74.00	23.48
4804.05	H	X	AV	34.42	5.39	-24.58	-	15.23	54.00	38.77

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.14	H	X	PK	45.02	5.67	-	-	50.69	74.00	23.31
4882.18	H	X	AV	33.21	5.67	-24.58	-	14.30	54.00	39.70

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.73	H	X	PK	47.56	-2.79	-	-	44.77	74.00	29.23
2484.18	H	X	AV	34.67	-2.79	-	-	31.88	54.00	22.12
4959.93	H	X	PK	45.44	6.04	-	-	51.48	74.00	22.52
4959.96	H	X	AV	32.67	6.04	-24.58	-	14.13	54.00	39.87

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

- L40SK2**9kHz ~ 25GHz Data(Modulation: GFSK)****▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.66	H	X	PK	47.99	-3.38	-	-	44.61	74.00	29.39
2389.66	H	X	AV	35.49	-3.38	-	-	32.11	54.00	21.89
4804.31	H	X	PK	50.60	5.39	-	-	55.99	74.00	18.01
4804.32	H	X	AV	39.34	5.39	-24.58	-	20.15	54.00	33.85

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.08	H	X	PK	49.18	5.67	-	-	54.85	74.00	19.15
4882.09	H	X	AV	37.08	5.67	-24.58	-	18.17	54.00	35.83

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.75	H	X	PK	47.31	-2.79	-	-	44.52	74.00	29.48
2483.79	H	X	AV	35.34	-2.79	-	-	32.55	54.00	21.45
4960.18	H	X	PK	49.54	6.04	-	-	55.58	74.00	18.42
4960.23	H	X	AV	37.60	6.04	-24.58	-	19.06	54.00	34.94

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, H' = 2, T = 2.95 ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = 20 \times \text{Log}(5.90\text{ms} / 100\text{ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.96	H	X	PK	47.56	-3.38	-	-	44.18	74.00	29.82
2389.99	H	X	AV	34.91	-3.38	-	-	31.53	54.00	22.47
4804.30	H	X	PK	49.95	5.39	-	-	55.34	74.00	18.66
4804.33	H	X	AV	38.54	5.39	-24.58	-	19.35	54.00	34.65

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.29	H	X	PK	49.47	5.67	-	-	55.14	74.00	18.86
4882.33	H	X	AV	37.03	5.67	-24.58	-	18.12	54.00	35.88

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.51	H	X	PK	47.82	-2.79	-	-	45.03	74.00	28.97
2483.55	H	X	AV	35.36	-2.79	-	-	32.57	54.00	21.43
4960.14	H	X	PK	49.84	6.04	-	-	55.88	74.00	18.12
4960.14	H	X	AV	37.01	6.04	-24.58	-	18.47	54.00	35.53

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

9kHz ~ 25GHz Data(Modulation: 8DPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.78	H	X	PK	47.69	-3.38	-	-	44.31	74.00	29.69
2389.83	H	X	AV	34.98	-3.38	-	-	31.60	54.00	22.40
4804.36	H	X	PK	49.34	5.39	-	-	54.73	74.00	19.27
4804.39	H	X	AV	39.01	5.39	-24.58	-	19.82	54.00	34.18

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.27	H	X	PK	49.26	5.67	-	-	54.93	74.00	19.07
4882.29	H	X	AV	36.85	5.67	-24.58	-	17.94	54.00	36.06

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.82	H	X	PK	47.97	-2.79	-	-	45.18	74.00	28.82
2483.82	H	X	AV	35.13	-2.79	-	-	32.34	54.00	21.66
4960.00	H	X	PK	49.54	6.04	-	-	55.58	74.00	18.42
4960.01	H	X	AV	36.68	6.04	-24.58	-	18.14	54.00	35.86

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

- L40VW2**9kHz ~ 25GHz Data(Modulation: GFSK)****▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.60	H	X	PK	47.93	- 3.38	-	-	44.55	74.00	29.45
2389.13	H	X	AV	34.65	- 3.38	-	-	31.27	54.00	22.73
4804.53	H	X	PK	48.70	5.39	-	-	54.09	74.00	19.91
4804.57	H	X	AV	36.36	5.39	- 24.58	-	17.17	54.00	36.83

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.00	H	X	PK	46.63	5.67	-	-	52.30	74.00	21.70
4882.02	H	X	AV	34.83	5.67	-24.58	-	15.92	54.00	38.08

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.41	H	X	PK	47.95	- 2.79	-	-	45.16	74.00	28.84
2483.54	H	X	AV	34.79	- 2.79	-	-	32.00	54.00	22.00
4960.12	H	X	PK	46.95	6.04	-	-	52.99	74.00	21.01
4960.12	H	X	AV	35.31	6.04	- 24.58	-	16.77	54.00	37.23

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.13	H	X	PK	48.06	- 3.38	-	-	44.68	74.00	29.32
2389.47	H	X	AV	35.21	- 3.38	-	-	31.83	54.00	22.17
4804.15	H	X	PK	47.88	5.39	-	-	53.27	74.00	20.73
4804.16	H	X	AV	36.26	5.39	- 24.58	-	17.07	54.00	36.93

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.47	H	X	PK	47.05	5.67	-	-	52.72	74.00	21.28
4882.51	H	X	AV	34.75	5.67	- 24.58	-	15.84	54.00	38.16

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.13	H	X	PK	47.91	- 2.79	-	-	45.12	74.00	28.88
2484.38	H	X	AV	35.44	- 2.79	-	-	32.65	54.00	21.35
4960.39	H	X	PK	47.17	6.04	-	-	53.21	74.00	20.79
4960.42	H	X	AV	34.48	6.04	- 24.58	-	15.94	54.00	38.06

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: 8DPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.56	H	X	PK	47.49	- 3.38	-	-	44.11	74.00	29.89
2389.22	H	X	AV	35.39	- 3.38	-	-	32.01	54.00	21.99
4804.35	H	X	PK	47.41	5.39	-	-	52.80	74.00	21.20
4804.36	H	X	AV	36.63	5.39	- 24.58	-	17.44	54.00	36.56

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.31	H	X	PK	47.71	5.67	-	-	53.38	74.00	20.62
4882.32	H	X	AV	34.96	5.67	- 24.58	-	16.05	54.00	37.95

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.32	H	X	PK	47.45	- 2.79	-	-	44.66	74.00	29.34
2483.94	H	X	AV	35.23	- 2.79	-	-	32.44	54.00	21.56
4960.05	H	X	PK	47.12	6.04	-	-	53.16	74.00	20.84
4960.07	H	X	AV	35.23	6.04	- 24.58	-	16.69	54.00	37.31

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

- L41SK2
9kHz ~ 25GHz Data(Modulation: GFSK)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.50	H	X	PK	47.87	-3.38	-	-	44.49	74.00	29.51
2389.52	H	X	AV	35.19	-3.38	-	-	31.81	54.00	22.19
4804.53	H	X	PK	51.11	5.39	-	-	56.50	74.00	17.50
4804.57	H	X	AV	39.45	5.39	-24.85	-	19.99	54.00	34.01

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.26	H	X	PK	49.87	5.67	-	-	55.54	74.00	18.46
4882.27	H	X	AV	38.06	5.67	-24.85	-	18.88	54.00	35.12

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.60	H	X	PK	48.08	-2.79	-	-	45.29	74.00	28.71
2483.60	H	X	AV	34.77	-2.79	-	-	31.98	54.00	22.02
4959.79	H	X	PK	49.74	6.04	-	-	55.78	74.00	18.22
4959.82	H	X	AV	38.09	6.04	-24.85	-	19.28	54.00	34.72

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- $\text{D.C.F} = 20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = 20 \times \text{Log}(5.90\text{ms} / 100\text{ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.95	H	X	PK	47.63	-3.38	-	-	44.25	74.00	29.75
2389.99	H	X	AV	35.08	-3.38	-	-	31.70	54.00	22.30
4803.99	H	X	PK	49.88	5.39	-	-	55.27	74.00	18.73
4804.00	H	X	AV	39.17	5.39	-24.58	-	19.98	54.00	34.02

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.10	H	X	PK	49.20	5.67	-	-	54.87	74.00	19.13
4882.11	H	X	AV	37.98	5.67	-24.58	-	19.07	54.00	34.93

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.82	H	X	PK	48.16	-2.79	-	-	45.37	74.00	28.63
2483.84	H	X	AV	34.64	-2.79	-	-	31.85	54.00	22.15
4960.04	H	X	PK	50.28	6.04	-	-	56.32	74.00	17.68
4960.07	H	X	AV	37.67	6.04	-24.58	-	19.13	54.00	34.87

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

9kHz ~ 25GHz Data(Modulation: 8DPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.95	H	X	PK	47.63	-3.38	-	-	44.25	74.00	29.75
2389.99	H	X	AV	35.08	-3.38	-	-	31.70	54.00	22.30
4804.38	H	X	PK	50.47	5.39	-	-	55.86	74.00	18.14
4804.38	H	X	AV	39.41	5.39	-24.58	-	20.22	54.00	33.78

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.18	H	X	PK	49.70	5.67	-	-	55.37	74.00	18.63
4882.19	H	X	AV	37.52	5.67	-24.58	-	18.61	54.00	35.39

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.82	H	X	PK	48.16	-2.79	-	-	45.37	74.00	28.63
2483.84	H	X	AV	34.64	-2.79	-	-	31.85	54.00	22.15
4960.01	H	X	PK	49.34	6.04	-	-	55.38	74.00	18.62
4960.02	H	X	AV	37.12	6.04	-24.58	-	18.58	54.00	35.42

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

- L41VW2
9kHz ~ 25GHz Data(Modulation: GFSK)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.83	H	X	PK	47.30	- 3.38	-	-	43.92	74.00	30.08
2389.84	H	X	AV	34.82	- 3.38	-	-	31.44	54.00	22.56
4804.27	H	X	PK	49.08	5.39	-	-	54.47	74.00	19.53
4804.28	H	X	AV	37.35	5.39	- 24.58	-	18.16	54.00	35.84

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.03	H	X	PK	47.37	5.67	-	-	53.04	74.00	20.96
4882.04	H	X	AV	35.33	5.67	- 24.58	-	16.42	54.00	37.58

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.63	H	X	PK	47.60	- 2.79	-	-	44.81	74.00	29.19
2483.66	H	X	AV	35.45	- 2.79	-	-	32.66	54.00	21.34
4960.08	H	X	PK	47.51	6.04	-	-	53.55	74.00	20.45
4960.11	H	X	AV	35.25	6.04	- 24.58	-	16.71	54.00	37.29

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- $\text{D.C.F} = 20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.61	H	X	PK	47.59	- 3.38	-	-	44.21	74.00	29.79
2389.63	H	X	AV	35.59	- 3.38	-	-	32.21	54.00	21.79
4804.12	H	X	PK	47.39	5.39	-	-	52.78	74.00	21.22
4804.15	H	X	AV	36.70	5.39	- 24.58	-	17.51	54.00	36.49

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.15	H	X	PK	47.49	5.67	-	-	53.16	74.00	20.84
4882.20	H	X	AV	35.84	5.67	- 24.58	-	16.93	54.00	37.07

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.53	H	X	PK	47.95	- 2.79	-	-	45.16	74.00	28.84
2483.57	H	X	AV	35.37	- 2.79	-	-	32.58	54.00	21.42
4960.16	H	X	PK	48.11	6.04	-	-	54.15	74.00	19.85
4960.19	H	X	AV	35.36	6.04	- 24.58	-	16.82	54.00	37.18

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: 8DPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.68	H	X	PK	47.95	- 3.38	-	-	44.57	74.00	29.43
2389.68	H	X	AV	35.48	- 3.38	-	-	32.10	54.00	21.90
4804.27	H	X	PK	47.94	5.39	-	-	53.33	74.00	20.67
4804.31	H	X	AV	37.30	5.39	- 24.58	-	18.11	54.00	35.89

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.54	H	X	PK	47.97	5.67	-	-	53.64	74.00	20.36
4882.56	H	X	AV	35.70	5.67	-24.58	-	16.79	54.00	37.21

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.95	H	X	PK	47.99	- 2.79	-	-	45.20	74.00	28.80
2483.96	H	X	AV	35.04	- 2.79	-	-	32.25	54.00	21.75
4959.99	H	X	PK	47.80	6.04	-	-	53.84	74.00	20.16
4960.02	H	X	AV	35.67	6.04	- 24.58	-	17.13	54.00	36.87

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

- L42VW2
9kHz ~ 25GHz Data(Modulation: GFSK)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.51	H	X	PK	47.96	- 3.38	-	-	44.58	74.00	29.42
2389.55	H	X	AV	35.34	- 3.38	-	-	31.96	54.00	22.04
4804.36	H	X	PK	49.60	5.39	-	-	54.99	74.00	19.01
4804.38	H	X	AV	38.59	5.39	- 24.58	-	19.40	54.00	34.60

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.17	H	X	PK	47.95	5.67	-	-	53.62	74.00	20.38
4882.19	H	X	AV	36.16	5.67	- 24.58	-	17.25	54.00	36.75

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.74	H	X	PK	47.63	- 2.79	-	-	44.84	74.00	29.16
2483.74	H	X	AV	35.54	- 2.79	-	-	32.75	54.00	21.25
4959.95	H	X	PK	48.83	6.04	-	-	54.87	74.00	19.13
4959.97	H	X	AV	36.76	6.04	- 24.58	-	18.22	54.00	35.78

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- $\text{D.C.F} = 20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.60	H	X	PK	47.71	- 3.38	-	-	44.33	74.00	29.67
2389.62	H	X	AV	34.67	- 3.38	-	-	31.29	54.00	22.71
4804.09	H	X	PK	48.95	5.39	-	-	54.34	74.00	19.66
4804.09	H	X	AV	37.89	5.39	- 24.58	-	18.70	54.00	35.30

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.41	H	X	PK	47.97	5.67	-	-	53.64	74.00	20.36
4882.45	H	X	AV	36.70	5.67	- 24.58	-	17.79	54.00	36.21

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.82	H	X	PK	47.33	- 2.79	-	-	44.54	74.00	29.46
2483.84	H	X	AV	34.77	- 2.79	-	-	31.98	54.00	22.02
4960.23	H	X	PK	48.45	6.04	-	-	54.49	74.00	19.51
4960.27	H	X	AV	36.12	6.04	- 24.58	-	17.58	54.00	36.42

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: 8DPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.56	H	X	PK	47.38	- 3.38	-	-	44.00	74.00	30.00
2389.57	H	X	AV	34.90	- 3.38	-	-	31.52	54.00	22.48
4804.27	H	X	PK	48.49	5.39	-	-	53.88	74.00	20.12
4804.29	H	X	AV	38.37	5.39	- 24.58	-	19.18	54.00	34.82

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.39	H	X	PK	48.97	5.67	-	-	54.64	74.00	19.36
4882.42	H	X	AV	36.99	5.67	- 24.58	-	18.08	54.00	35.92

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.91	H	X	PK	47.31	- 2.79	-	-	44.52	74.00	29.48
2483.94	H	X	AV	34.93	- 2.79	-	-	32.14	54.00	21.86
4959.93	H	X	PK	48.49	6.04	-	-	54.53	74.00	19.47
4959.97	H	X	AV	36.43	6.04	- 24.58	-	17.89	54.00	36.11

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

- L52SK2
9kHz ~ 25GHz Data(Modulation: GFSK)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.87	H	X	PK	47.89	-3.38	-	-	44.51	74.00	29.49
2389.45	H	X	AV	35.53	-3.38	-	-	32.15	54.00	21.85
4804.02	H	X	PK	46.67	5.39	-	-	52.06	74.00	21.94
4804.02	H	X	AV	34.86	5.39	-24.58	-	15.67	54.00	38.33

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.98	H	X	PK	45.07	5.67	-	-	50.74	74.00	23.26
4882.05	H	X	AV	33.24	5.67	-24.58	-	14.33	54.00	39.67

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.48	H	X	PK	47.96	-2.79	-	-	45.17	74.00	28.83
2483.76	H	X	AV	35.49	-2.79	-	-	32.70	54.00	21.30
4959.99	H	X	PK	45.21	6.04	-	-	51.25	74.00	22.75
4959.88	H	X	AV	33.23	6.04	-24.58	-	14.69	54.00	39.31

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95\text{ ms}$, $2 \times 2.95 = 5.90$)
- $\text{D.C.F} = 20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = 20 \times \text{Log}(5.90\text{ms} / 100\text{ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.38	H	X	PK	47.46	-3.38	-	-	44.08	74.00	29.92
2389.57	H	X	AV	35.17	-3.38	-	-	31.79	54.00	22.21
4803.77	H	X	PK	45.51	5.39	-	-	50.90	74.00	23.10
4803.90	H	X	AV	34.76	5.39	-24.58	-	15.57	54.00	38.43

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.16	H	X	PK	45.12	5.67	-	-	50.79	74.00	23.21
4882.00	H	X	AV	33.32	5.67	-24.58	-	14.41	54.00	39.59

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.74	H	X	PK	47.32	-2.79	-	-	44.53	74.00	29.47
2484.00	H	X	AV	35.16	-2.79	-	-	32.37	54.00	21.63
4959.99	H	X	PK	45.60	6.04	-	-	51.64	74.00	22.36
4959.98	H	X	AV	33.07	6.04	-24.58	-	14.53	54.00	39.47

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95\text{ ms}$, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = 20 \times \text{Log}(5.90\text{ ms} / 100\text{ ms}) = -24.58\text{ dB}$

9kHz ~ 25GHz Data(Modulation: 8DPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.52	H	X	PK	47.18	-3.38	-	-	43.80	74.00	30.20
2389.54	H	X	AV	34.61	-3.38	-	-	31.23	54.00	22.77
4803.96	H	X	PK	45.69	5.39	-	-	51.08	74.00	22.92
4803.97	H	X	AV	34.87	5.39	-24.58	-	15.68	54.00	38.32

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.95	H	X	PK	45.58	5.67	-	-	51.25	74.00	22.75
4881.91	H	X	AV	33.23	5.67	-24.58	-	14.32	54.00	39.68

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.55	H	X	PK	47.09	-2.79	-	-	44.30	74.00	29.70
2483.88	H	X	AV	34.67	-2.79	-	-	31.88	54.00	22.12
4960.02	H	X	PK	45.04	6.04	-	-	51.08	74.00	22.92
4959.96	H	X	AV	33.00	6.04	-24.58	-	14.46	54.00	39.54

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100\text{ms})$ dB = $20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58$ dB

- L53VW2
9kHz ~ 25GHz Data(Modulation: GFSK)

▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.90	H	X	PK	47.51	- 3.38	-	-	44.13	74.00	29.87
2389.91	H	X	AV	35.21	- 3.38	-	-	31.83	54.00	22.17
4804.50	H	X	PK	48.75	5.39	-	-	54.14	74.00	19.86
4804.51	H	X	AV	37.09	5.39	- 24.58	-	17.90	54.00	36.10

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.35	H	X	PK	47.21	5.67	-	-	52.88	74.00	21.12
4882.36	H	X	AV	35.67	5.67	- 24.58	-	16.76	54.00	37.24

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.59	H	X	PK	47.40	- 2.79	-	-	44.61	74.00	29.39
2483.60	H	X	AV	35.58	- 2.79	-	-	32.79	54.00	21.21
4960.01	H	X	PK	46.81	6.04	-	-	52.85	74.00	21.15
4960.05	H	X	AV	35.02	6.04	- 24.58	-	16.48	54.00	37.52

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- $\text{D.C.F} = 20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.85	H	X	PK	47.61	- 3.38	-	-	44.23	74.00	29.77
2389.89	H	X	AV	34.83	- 3.38	-	-	31.45	54.00	22.55
4804.28	H	X	PK	47.61	5.39	-	-	53.00	74.00	21.00
4804.32	H	X	AV	36.68	5.39	- 24.58	-	17.49	54.00	36.51

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.27	H	X	PK	46.66	5.67	-	-	52.33	74.00	21.67
4882.29	H	X	AV	35.56	5.67	- 24.58	-	16.65	54.00	37.35

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.55	H	X	PK	47.90	- 2.79	-	-	45.11	74.00	28.89
2483.58	H	X	AV	35.40	- 2.79	-	-	32.61	54.00	21.39
4960.29	H	X	PK	47.81	6.04	-	-	53.85	74.00	20.15
4960.31	H	X	AV	34.77	6.04	- 24.58	-	16.23	54.00	37.77

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$

9kHz ~ 25GHz Data(Modulation: 8DPSK)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.56	H	X	PK	47.37	- 3.38	-	-	43.99	74.00	30.01
2389.59	H	X	AV	34.68	- 3.38	-	-	31.30	54.00	22.70
4804.52	H	X	PK	47.78	5.39	-	-	53.17	74.00	20.83
4804.55	H	X	AV	37.08	5.39	- 24.58	-	17.89	54.00	36.11

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.27	H	X	PK	47.92	5.67	-	-	53.59	74.00	20.41
4882.29	H	X	AV	35.68	5.67	- 24.58	-	16.77	54.00	37.23

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detect or Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.79	H	X	PK	47.74	- 2.79	-	-	44.95	74.00	29.05
2483.83	H	X	AV	35.19	- 2.79	-	-	32.40	54.00	21.60
4960.00	H	X	PK	47.50	6.04	-	-	53.54	74.00	20.46
4960.02	H	X	AV	35.23	6.04	- 24.58	-	16.69	54.00	37.31

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{D.C.F.} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,


4. D.C.F Calculation. (D.C.F. = Duty Cycle Correction Factor)

- Time to cycle through all channels= $\Delta t = T_{[ms]} \times 20$ minimum hopping channels, where T = pulse width
- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, H'
- The Worst Case Dwell Time = $T_{[ms]} \times H'$ (For this case, $H' = 2$, $T = 2.95$ ms, $2 \times 2.95 = 5.90$)
- D.C.F = $20 \times \text{Log}(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \times \text{Log}(5.90 \text{ ms} / 100 \text{ ms}) = -24.58 \text{ dB}$


2.4.2 Conducted Spurious Emissions

- L40SE2


Low Band-edge

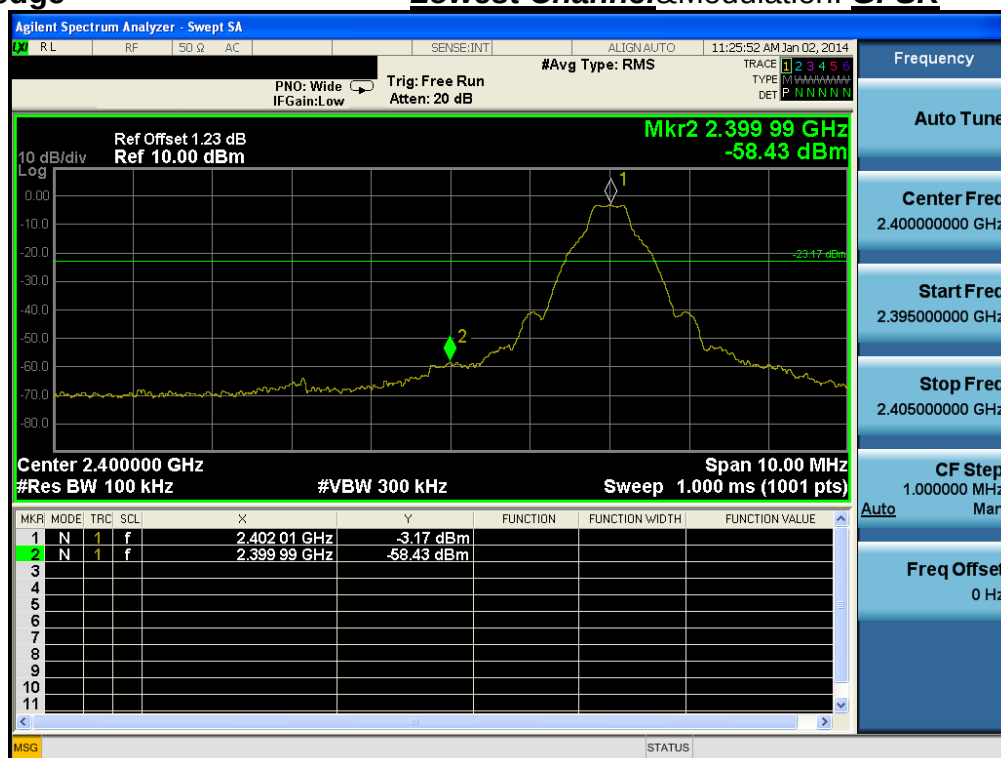Lowest Channel&Modulation: GFSK

Low Band-edge

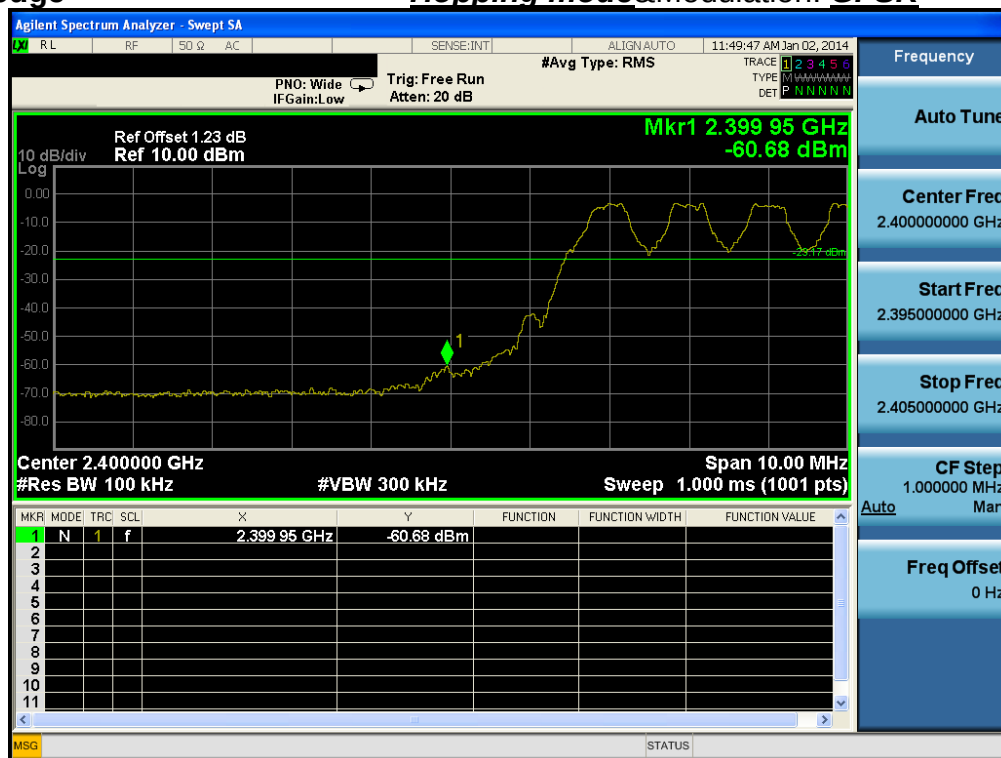Hopping mode&Modulation: GFSK


Conducted Spurious Emissions Lowest Channel&Modulation: GFSK

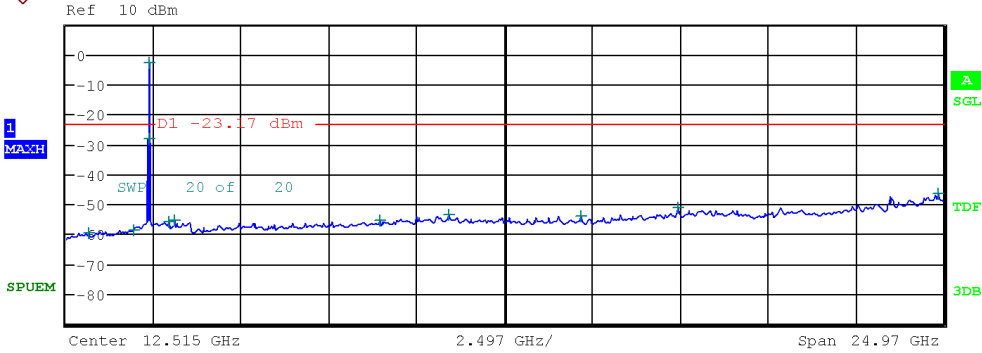

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	671.493333 M	-59.80
1.000 G	2.000 G	1.00 M	1.938667 G	-58.73
2.000 G	2.400 G	1.00 M	2.400000 G	-28.15
2.400 G	2.483 G	1.00 M	2.401950 G	-2.95
2.483 G	3.000 G	1.00 M	2.956304 G	-55.83
3.000 G	6.000 G	1.00 M	3.122500 G	-55.46
6.000 G	9.000 G	1.00 M	8.963333 G	-55.62
9.000 G	12.000 G	1.00 M	10.933000 G	-53.42
12.000 G	15.000 G	1.00 M	14.689667 G	-54.24
15.000 G	20.000 G	1.00 M	17.432000 G	-51.49
20.000 G	25.000 G	1.00 M	24.833000 G	-46.67


Reference for limit

Middle Channel&Modulation: GFSK

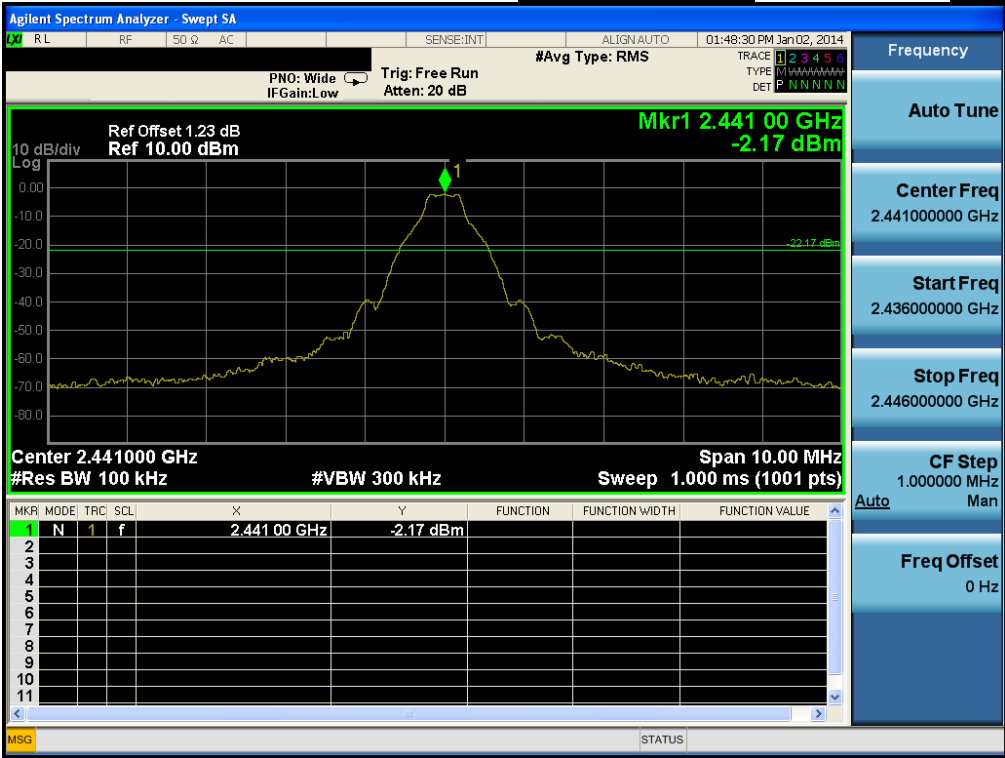


Conducted Spurious Emissions

Middle Channel&Modulation: GFSK

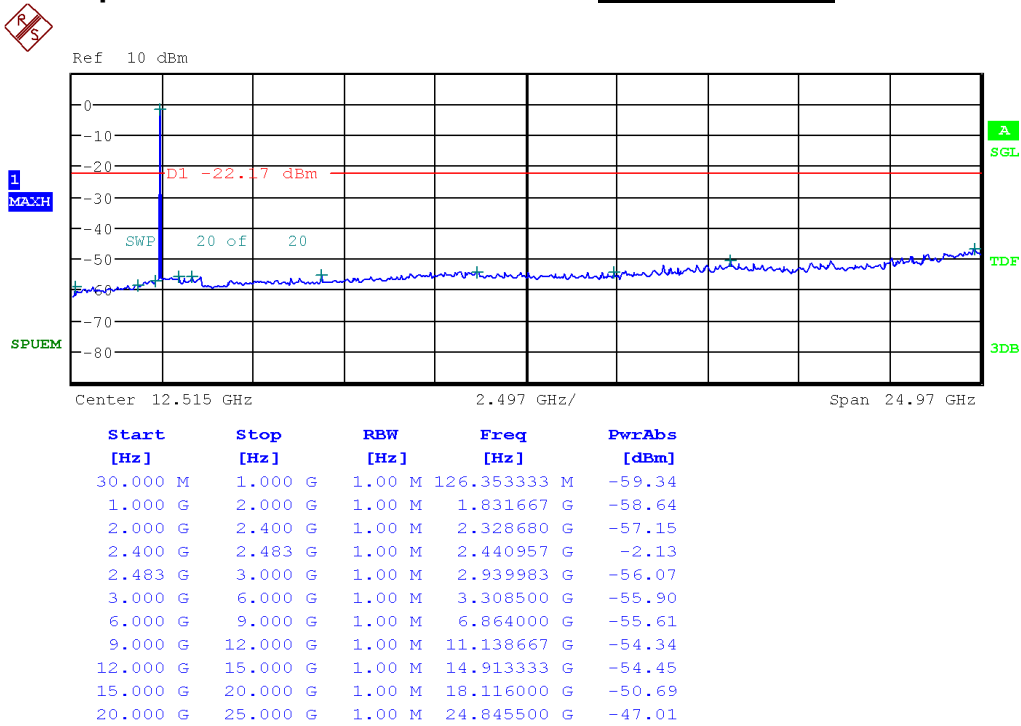

High Band-edge

Highest Channel&Modulation: *GFSK*

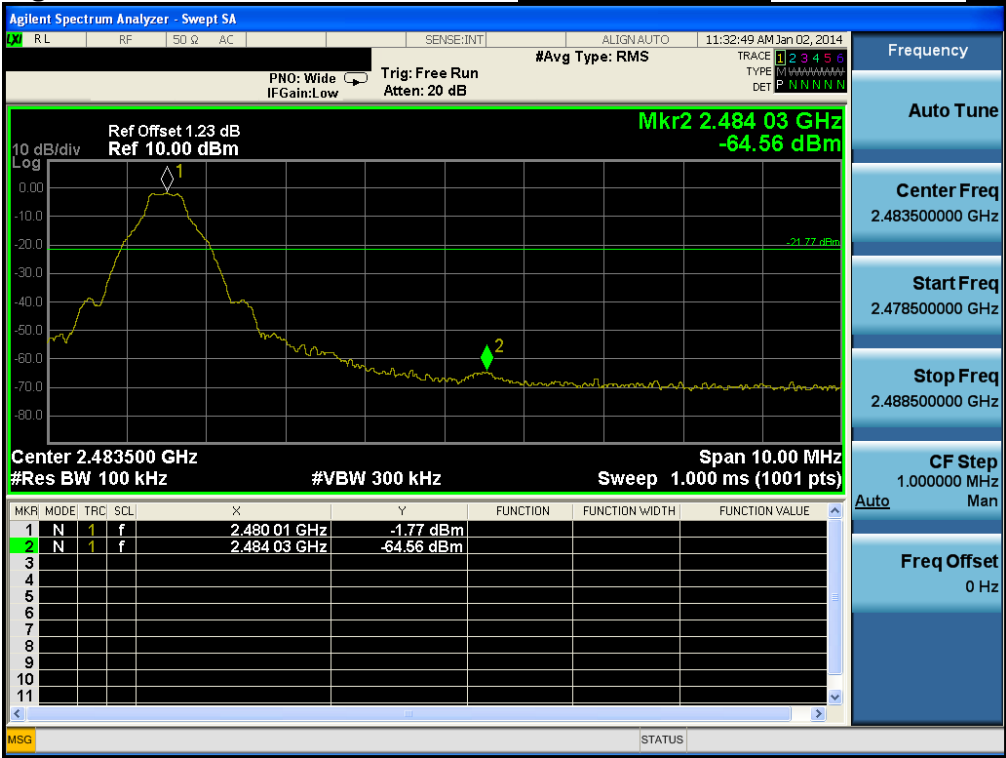

High Band-edge

Hopping mode&Modulation: *GFSK*



Highest Channel& Modulation: **GFSK**

Ref 10 dBm

DL -21.77 dBm

SWP 20 of 20

Center 12.515 GHz 2.497 GHz/ Span 24.97 GHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	467.793333 M	-59.85
1.000 G	2.000 G	1.00 M	1.938667 G	-57.82
2.000 G	2.400 G	1.00 M	2.229040 G	-57.19
2.400 G	2.483 G	1.00 M	2.480081 G	-1.66
2.483 G	3.000 G	1.00 M	2.483500 G	-44.29
3.000 G	6.000 G	1.00 M	3.166500 G	-56.34
6.000 G	9.000 G	1.00 M	8.443333 G	-55.21
9.000 G	12.000 G	1.00 M	10.696000 G	-54.42
12.000 G	15.000 G	1.00 M	12.656333 G	-54.70
15.000 G	20.000 G	1.00 M	18.466500 G	-51.12
20.000 G	25.000 G	1.00 M	24.852000 G	-47.12


Low Band-edge

Lowest Channel&Modulation: $\pi/4$ DQPSK




Low Band-edge

Hopping mode&Modulation: $\pi/4$ DQPSK

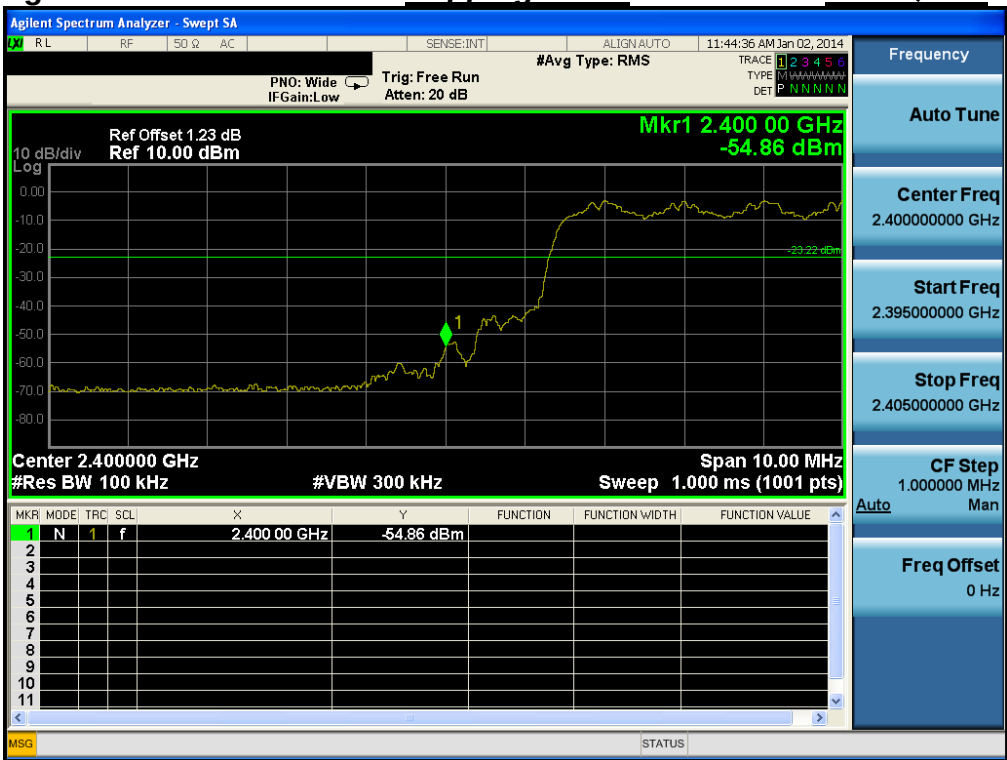


Conducted Spurious Emissions

Lowest Channel&Modulation: **$\pi/4$ DQPSK**

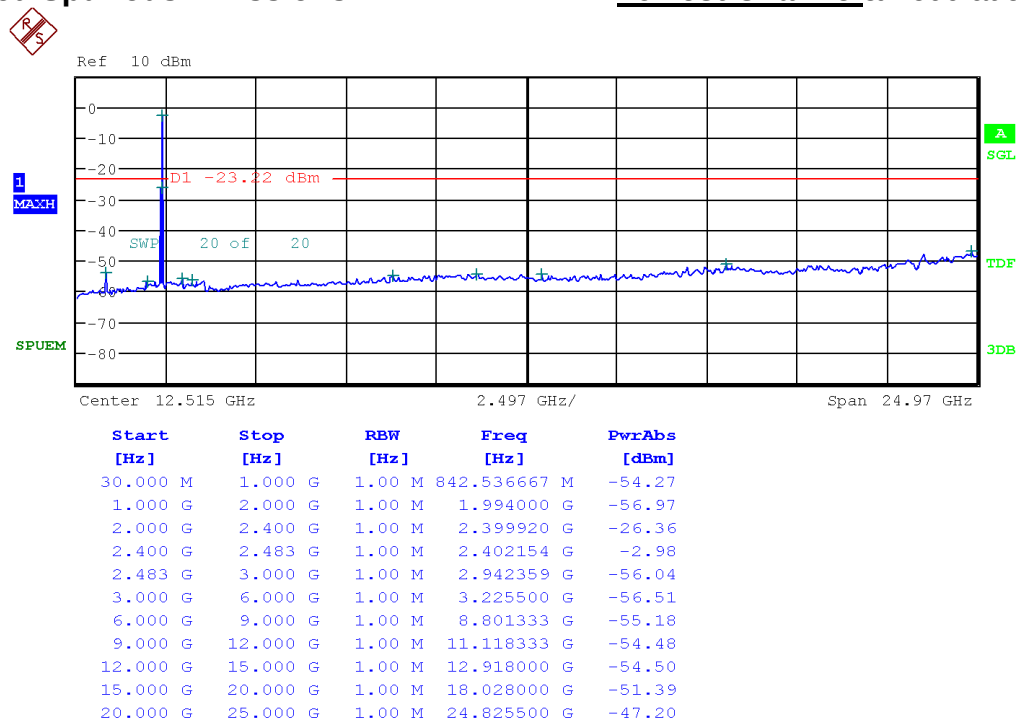


Reference for limit

Middle Channel&Modulation: $\pi/4$ DQPSK

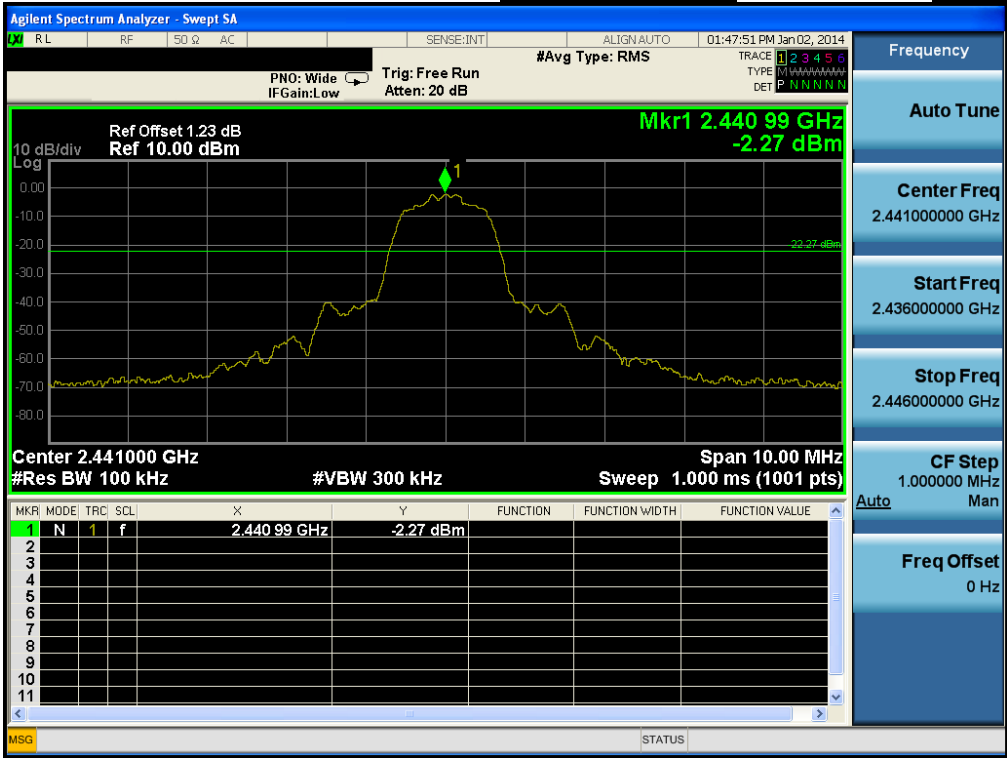

Conducted Spurious Emissions

Middle Channel&Modulation: $\pi/4$ DQPSK

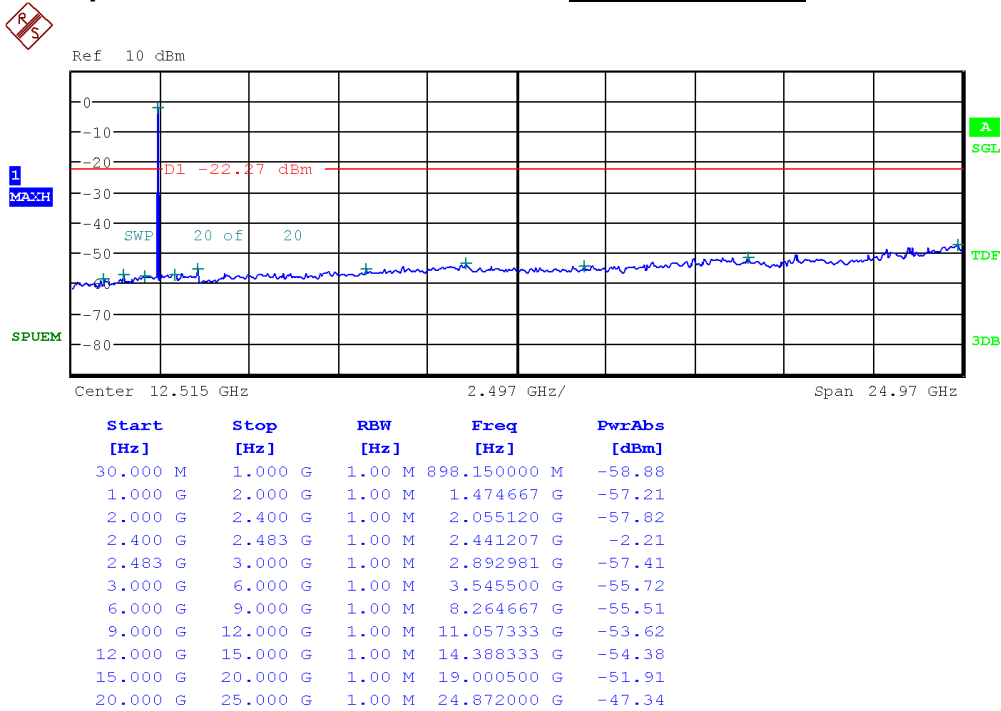

High Band-edge

Highest Channel&Modulation: $\pi/4$ DQPSK

High Band-edge

Hopping mode&Modulation: $\pi/4$ DQPSK

Highest Channel&Modulation: **$\pi/4$ DQPSK**

Ref 10 dBm

D1 -21.79 dBm

SWP 20 of 20

Center 12.515 GHz 2.497 GHz/ Span 24.97 GHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	474.260000 M	-58.78
1.000 G	2.000 G	1.00 M	1.940667 G	-58.62
2.000 G	2.400 G	1.00 M	2.034920 G	-57.65
2.400 G	2.483 G	1.00 M	2.479818 G	-1.65
2.483 G	3.000 G	1.00 M	2.483500 G	-43.97
3.000 G	6.000 G	1.00 M	3.575500 G	-56.62
6.000 G	9.000 G	1.00 M	8.966000 G	-55.88
9.000 G	12.000 G	1.00 M	10.664333 G	-53.43
12.000 G	15.000 G	1.00 M	12.881333 G	-54.61
15.000 G	20.000 G	1.00 M	18.124000 G	-51.99
20.000 G	25.000 G	1.00 M	24.048500 G	-47.52

Low Band-edge

Lowest Channel&Modulation: 8DPSK




Low Band-edge

Hopping mode&Modulation: 8DPSK



Conducted Spurious Emissions


Lowest Channel&Modulation: 8DPSK

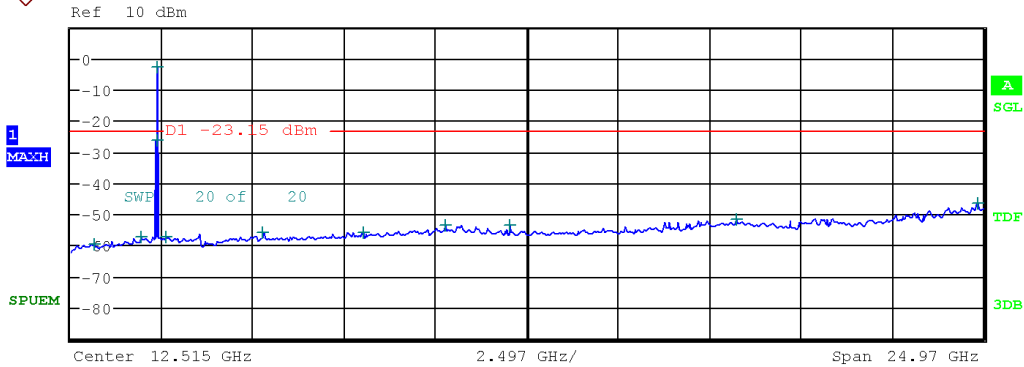

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	680.223333 M	-59.79
1.000 G	2.000 G	1.00 M	1.959667 G	-57.16
2.000 G	2.400 G	1.00 M	2.399960 G	-26.17
2.400 G	2.483 G	1.00 M	2.401971 G	-2.95
2.483 G	3.000 G	1.00 M	2.616550 G	-57.21
3.000 G	6.000 G	1.00 M	5.292000 G	-56.14
6.000 G	9.000 G	1.00 M	8.030667 G	-55.88
9.000 G	12.000 G	1.00 M	10.261667 G	-53.45
12.000 G	15.000 G	1.00 M	12.042667 G	-53.84
15.000 G	20.000 G	1.00 M	18.227000 G	-51.70
20.000 G	25.000 G	1.00 M	24.826000 G	-46.60


Reference for limit

Middle Channel&Modulation: 8DPSK

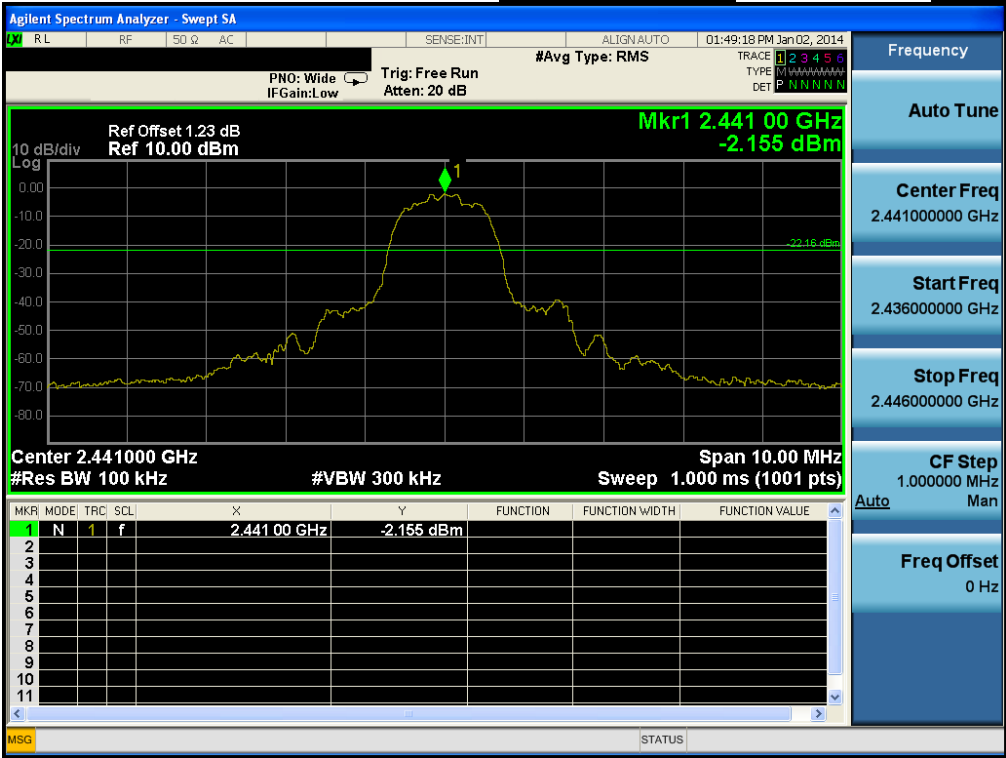

Conducted Spurious Emissions

Middle Channel&Modulation: 8DPSK

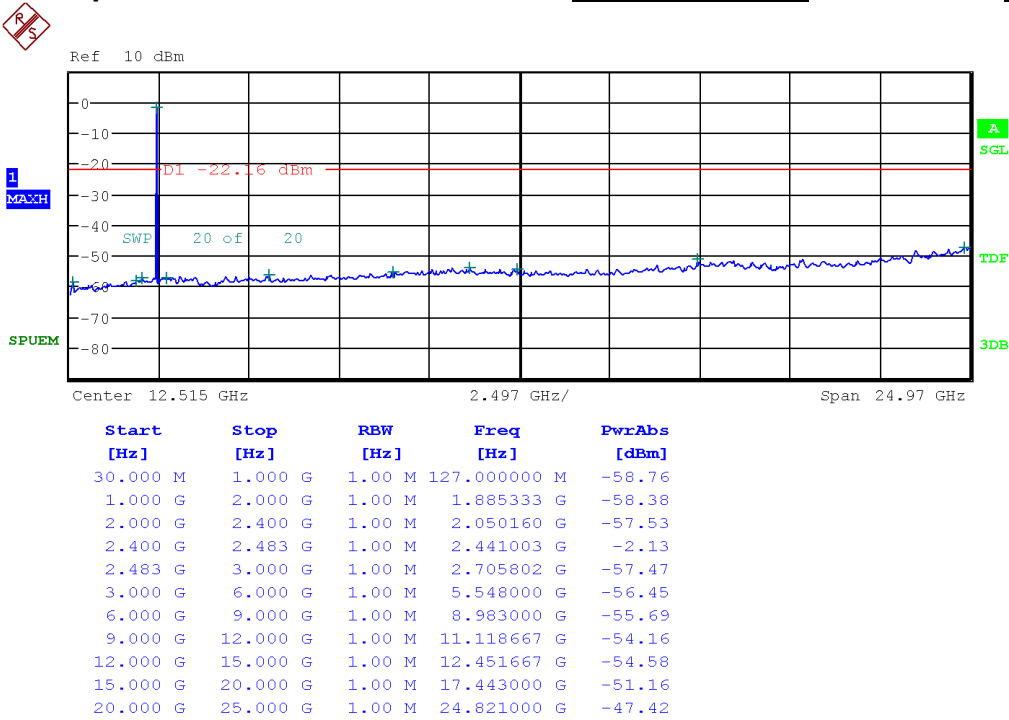

High Band-edge

Highest Channel&Modulation: 8DPSK

High Band-edge

Hopping mode&Modulation: 8DPSK

Highest Channel&Modulation: **8DPSK**

Ref 10 dBm

1 MAXH

SPUEM

DB1 -21.74 dBm


SWEP 20 of 20

Center 12.515 GHz

2.497 GHz/

Span 24.97 GHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	995.473333 M	-59.87
1.000 G	2.000 G	1.00 M	1.960000 G	-58.43
2.000 G	2.400 G	1.00 M	2.027160 G	-57.44
2.400 G	2.483 G	1.00 M	2.480022 G	-1.55
2.483 G	3.000 G	1.00 M	2.483500 G	-43.41
3.000 G	6.000 G	1.00 M	5.813500 G	-56.81
6.000 G	9.000 G	1.00 M	8.916667 G	-56.19
9.000 G	12.000 G	1.00 M	10.594333 G	-53.99
12.000 G	15.000 G	1.00 M	13.757667 G	-54.52
15.000 G	20.000 G	1.00 M	18.347500 G	-51.47
20.000 G	25.000 G	1.00 M	24.785000 G	-47.23

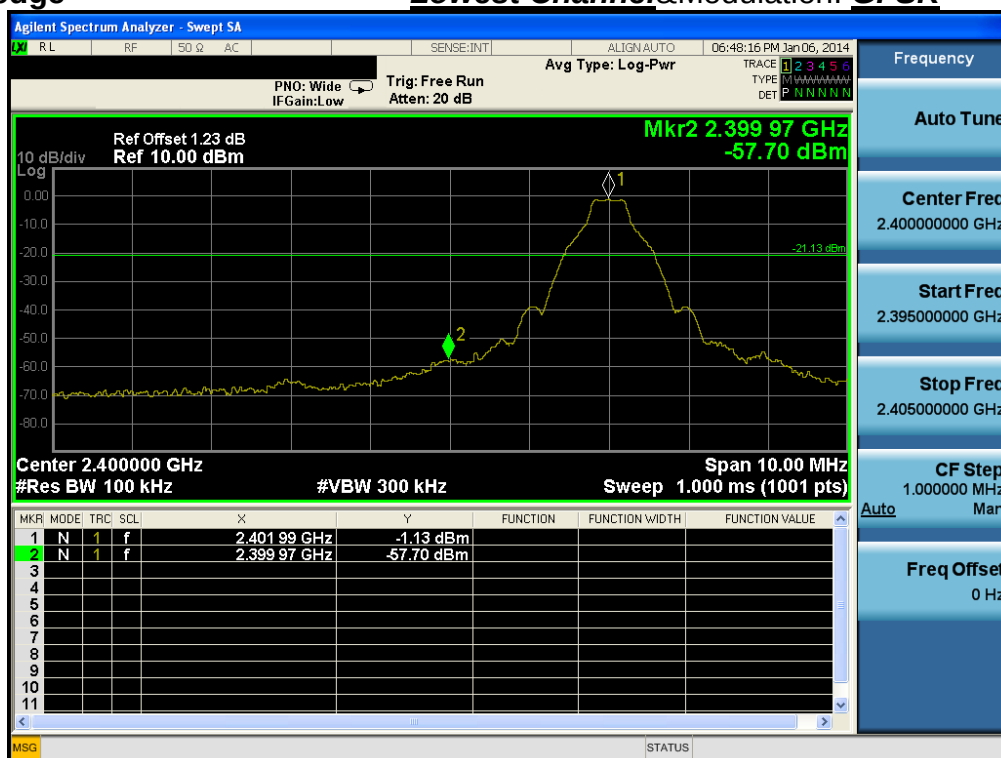- L40SK2
Low Band-edge***Lowest Channel***&Modulation: ***GFSK*****Low Band-edge*****Hopping mode***&Modulation: ***GFSK***

Lowest Channel&Modulation: **GFSK**


Ref 10 dBm

Center 12.515 GHz 2.497 GHz/ Span 24.97 GHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	87.876667 M	-59.26
1.000 G	2.000 G	1.00 M	1.843000 G	-58.25
2.000 G	2.400 G	1.00 M	2.400000 G	-26.16
2.400 G	2.483 G	1.00 M	2.402096 G	-0.97
2.483 G	3.000 G	1.00 M	2.521205 G	-54.20
3.000 G	6.000 G	1.00 M	3.477000 G	-55.06
6.000 G	9.000 G	1.00 M	8.902667 G	-55.75
9.000 G	12.000 G	1.00 M	11.158000 G	-53.17
12.000 G	15.000 G	1.00 M	14.739000 G	-54.14
15.000 G	20.000 G	1.00 M	18.304500 G	-51.56
20.000 G	25.000 G	1.00 M	24.825000 G	-47.07


Reference for limit

Middle Channel&Modulation: GFSK

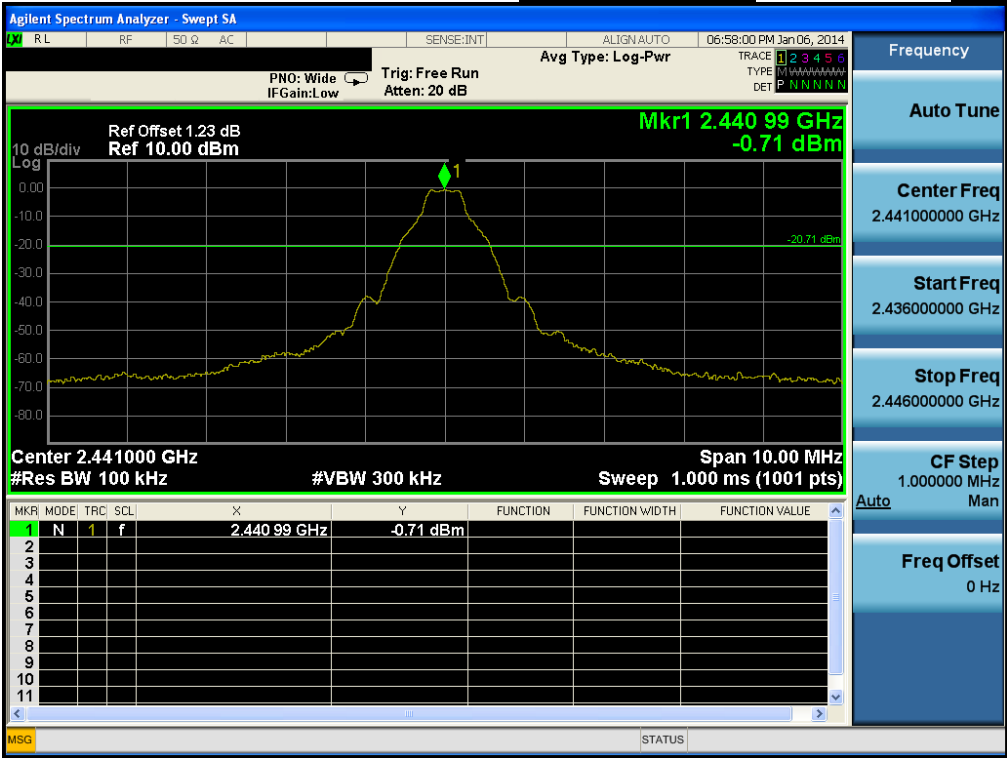


Conducted Spurious Emissions

Middle Channel&Modulation: GFSK

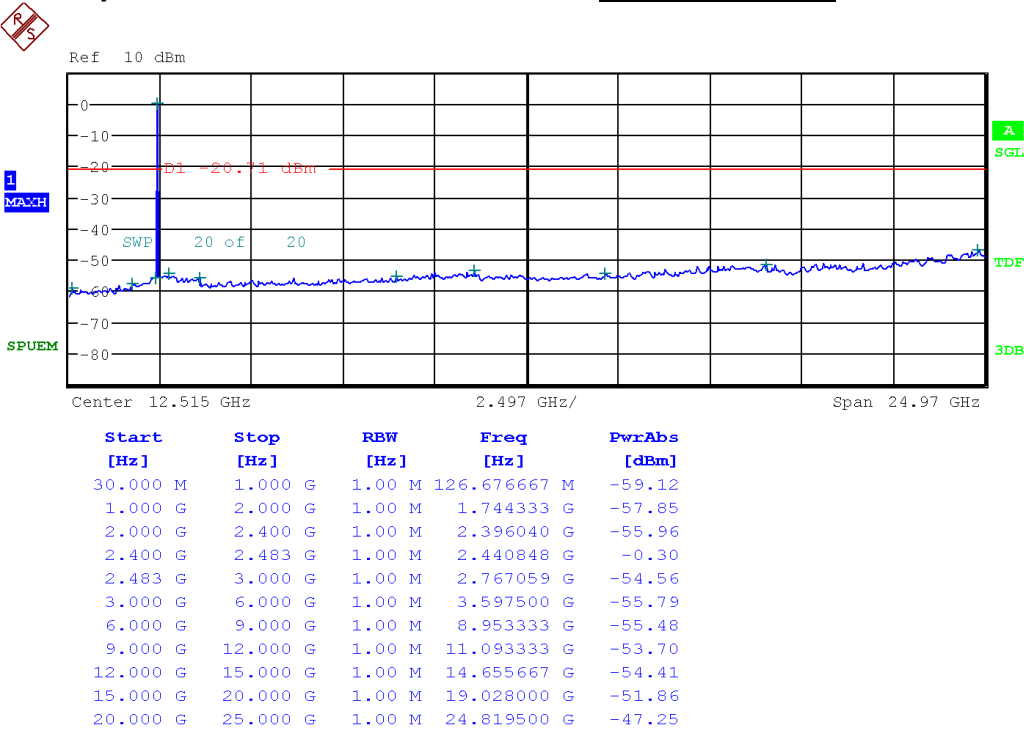

High Band-edge

Highest Channel&Modulation: *GFSK*

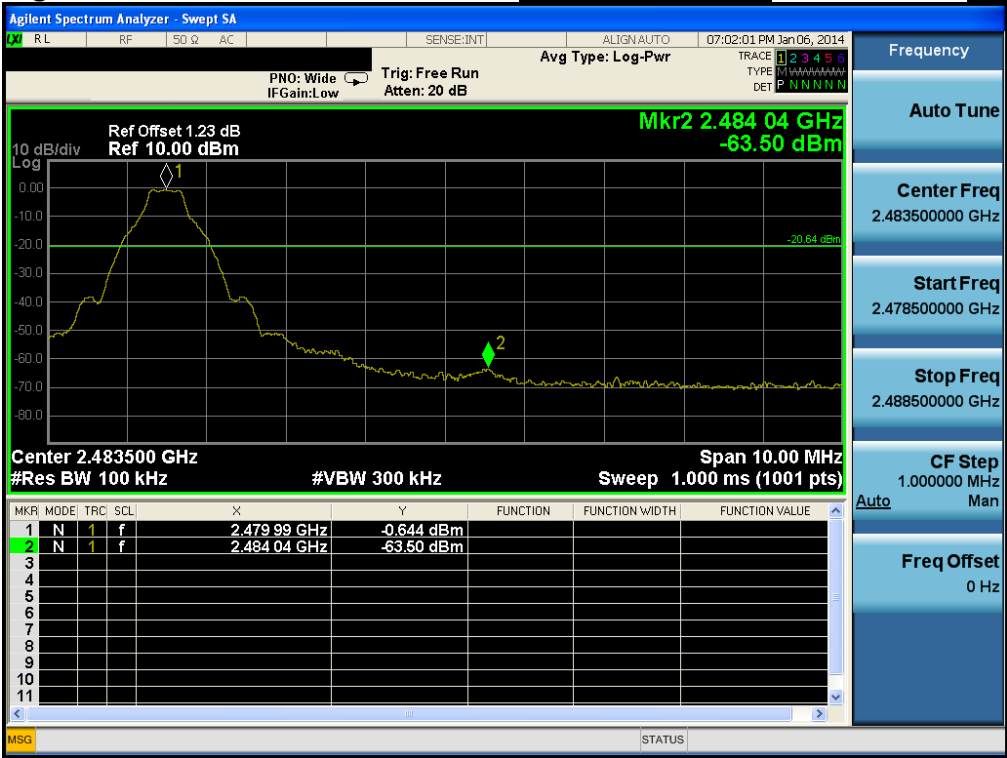


High Band-edge

Hopping mode&Modulation: *GFSK*



Conducted Spurious Emissions

Highest Channel& Modulation: GFSK

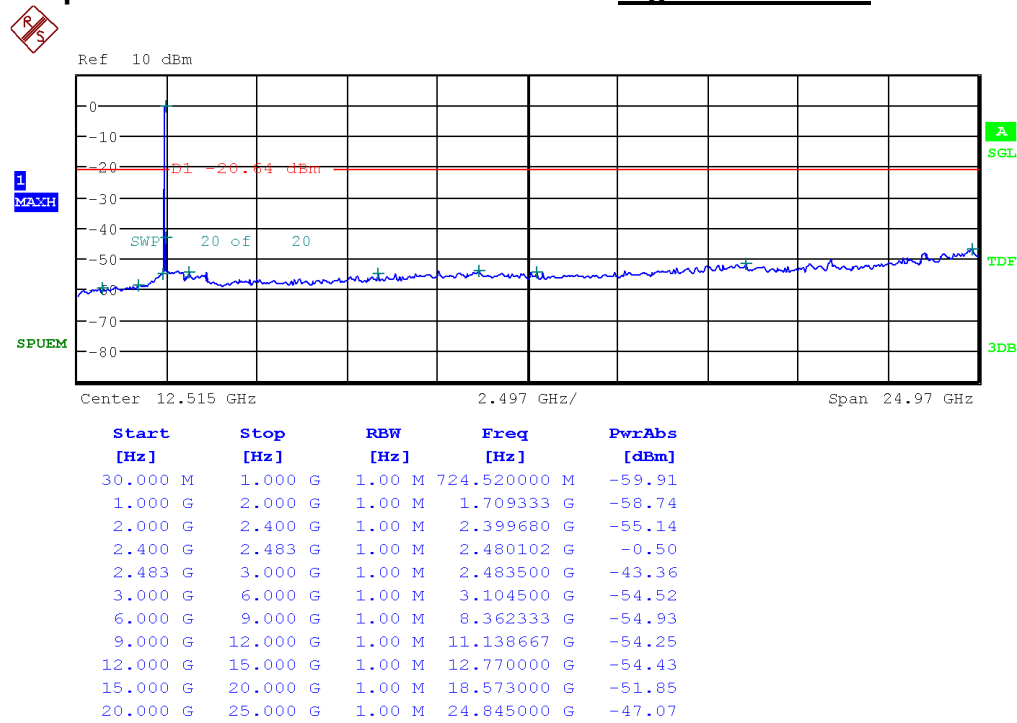

Low Band-edge

Lowest Channel&Modulation: $\pi/4$ DQPSK




Low Band-edge

Hopping mode&Modulation: $\pi/4$ DQPSK



Conducted Spurious Emissions


Lowest Channel&Modulation: $\pi/4$ DQPSK

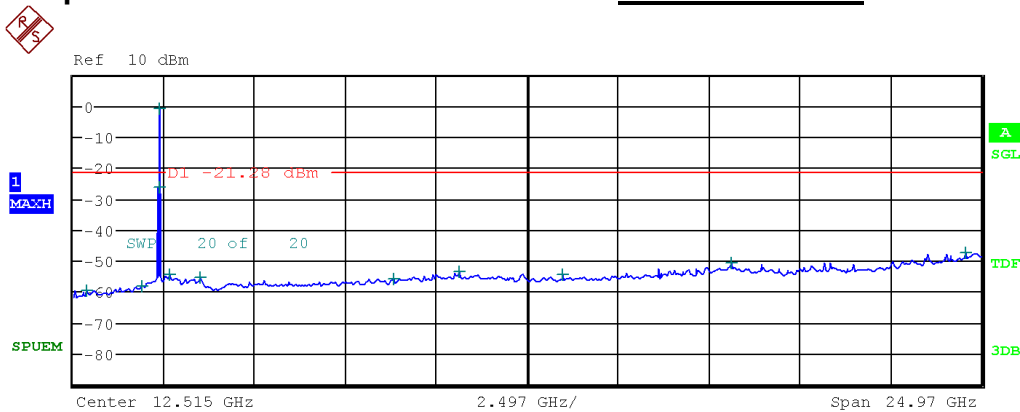

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	397.630000 M	-59.56
1.000 G	2.000 G	1.00 M	1.925000 G	-58.14
2.000 G	2.400 G	1.00 M	2.400000 G	-26.27
2.400 G	2.483 G	1.00 M	2.401962 G	-1.07
2.483 G	3.000 G	1.00 M	2.652447 G	-54.32
3.000 G	6.000 G	1.00 M	3.521000 G	-55.30
6.000 G	9.000 G	1.00 M	8.817667 G	-55.78
9.000 G	12.000 G	1.00 M	10.636000 G	-53.77
12.000 G	15.000 G	1.00 M	13.471333 G	-54.35
15.000 G	20.000 G	1.00 M	18.135000 G	-51.02
20.000 G	25.000 G	1.00 M	24.578500 G	-47.59


Reference for limit

Middle Channel&Modulation: $\pi/4$ DQPSK

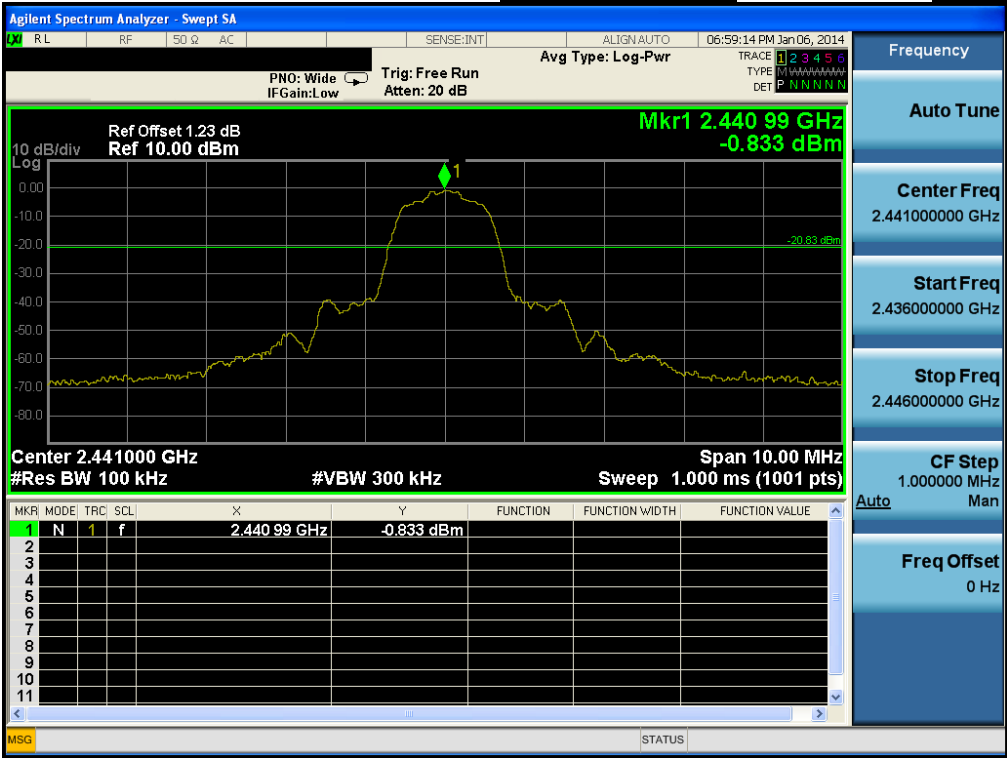

Conducted Spurious Emissions

Middle Channel&Modulation: $\pi/4$ DQPSK

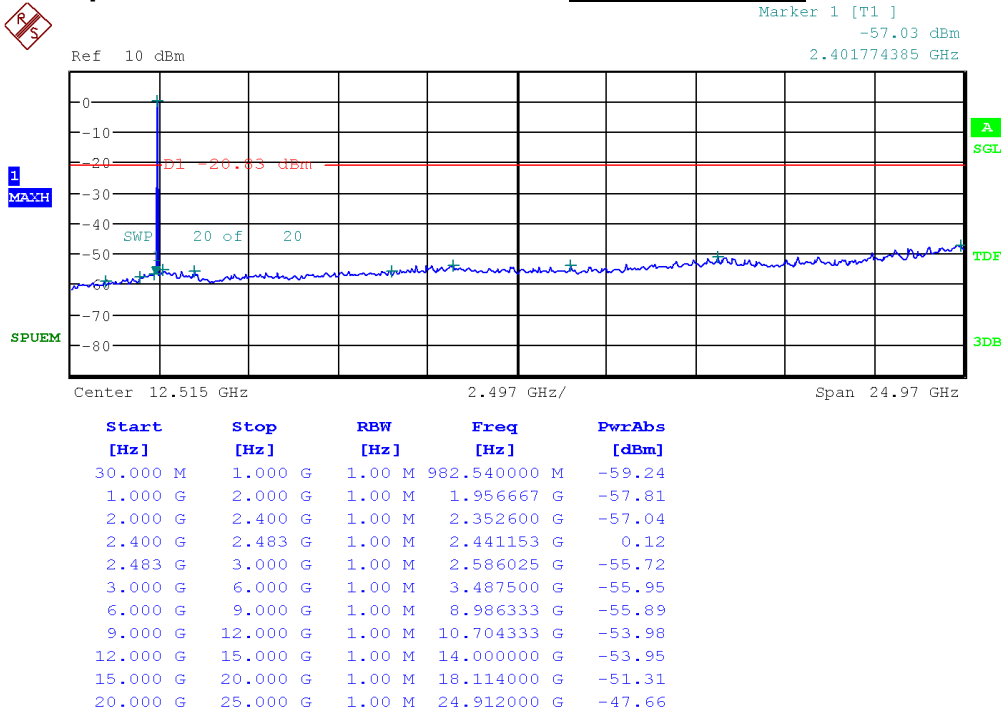


High Band-edge

Highest Channel&Modulation: $\pi/4$ DQPSK



High Band-edge

Hopping mode&Modulation: $\pi/4$ DQPSK

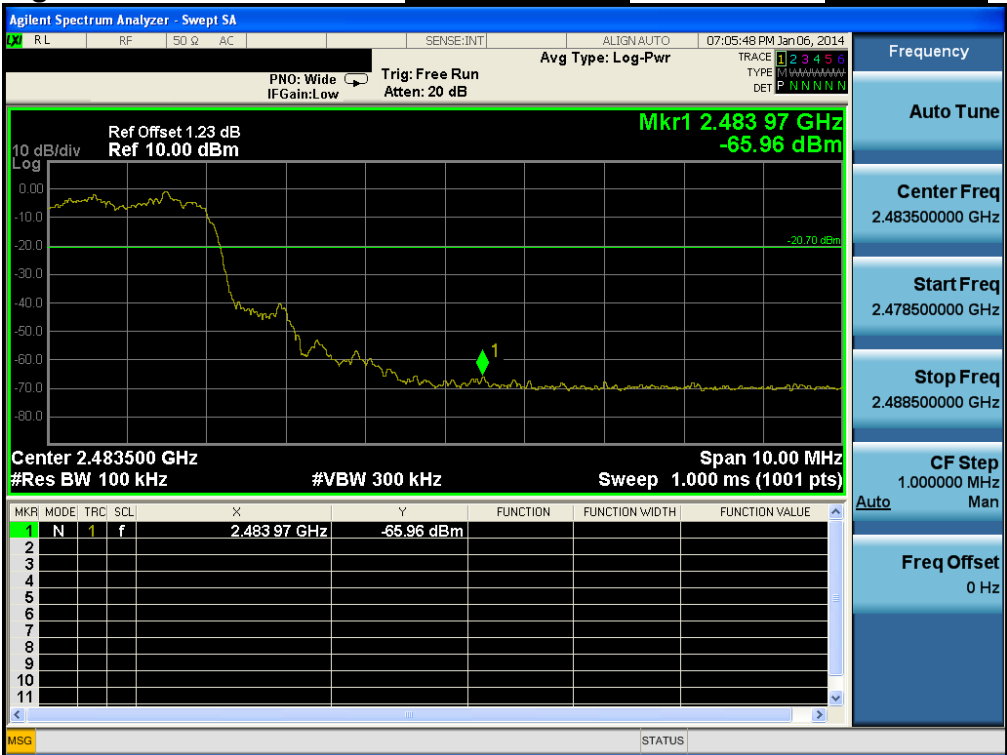

Highest Channel&Modulation: **$\pi/4$ DQPSK**



Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	165.800000 M	-59.13
1.000 G	2.000 G	1.00 M	1.959333 G	-53.58
2.000 G	2.400 G	1.00 M	2.190080 G	-57.56
2.400 G	2.483 G	1.00 M	2.480122 G	-0.06
2.483 G	3.000 G	1.00 M	2.483500 G	-42.12
3.000 G	6.000 G	1.00 M	5.058500 G	-56.36
6.000 G	9.000 G	1.00 M	8.599000 G	-55.42
9.000 G	12.000 G	1.00 M	10.952667 G	-54.32
12.000 G	15.000 G	1.00 M	12.386333 G	-54.47
15.000 G	20.000 G	1.00 M	18.088000 G	-51.42
20.000 G	25.000 G	1.00 M	24.809500 G	-46.60

Low Band-edge


Lowest Channel&Modulation: 8DPSK

Low Band-edge

Hopping mode&Modulation: 8DPSK


Conducted Spurious Emissions

Lowest Channel&Modulation: **8DPSK**

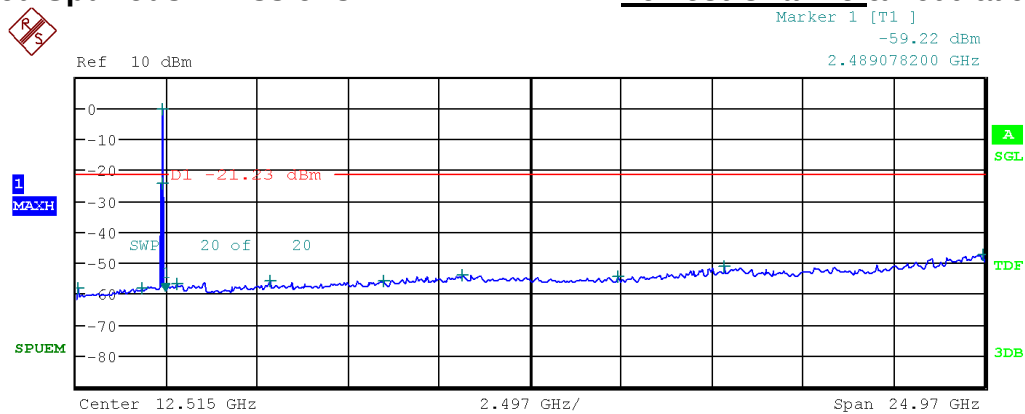


Start	stop	RBW	Freq	PwrAbs
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]
30.000 M	1.000 G	1.00 M	87.876667 M	-58.53
1.000 G	2.000 G	1.00 M	1.834000 G	-58.35
2.000 G	2.400 G	1.00 M	2.400000 G	-24.28
2.400 G	2.483 G	1.00 M	2.401975 G	-0.73
2.483 G	3.000 G	1.00 M	2.778112 G	-56.99
3.000 G	6.000 G	1.00 M	5.368500 G	-55.75
6.000 G	9.000 G	1.00 M	8.462000 G	-55.89
9.000 G	12.000 G	1.00 M	10.642000 G	-53.96
12.000 G	15.000 G	1.00 M	14.906000 G	-54.74
15.000 G	20.000 G	1.00 M	17.835000 G	-51.49
20.000 G	25.000 G	1.00 M	24.964500 G	-47.42

Reference for limit

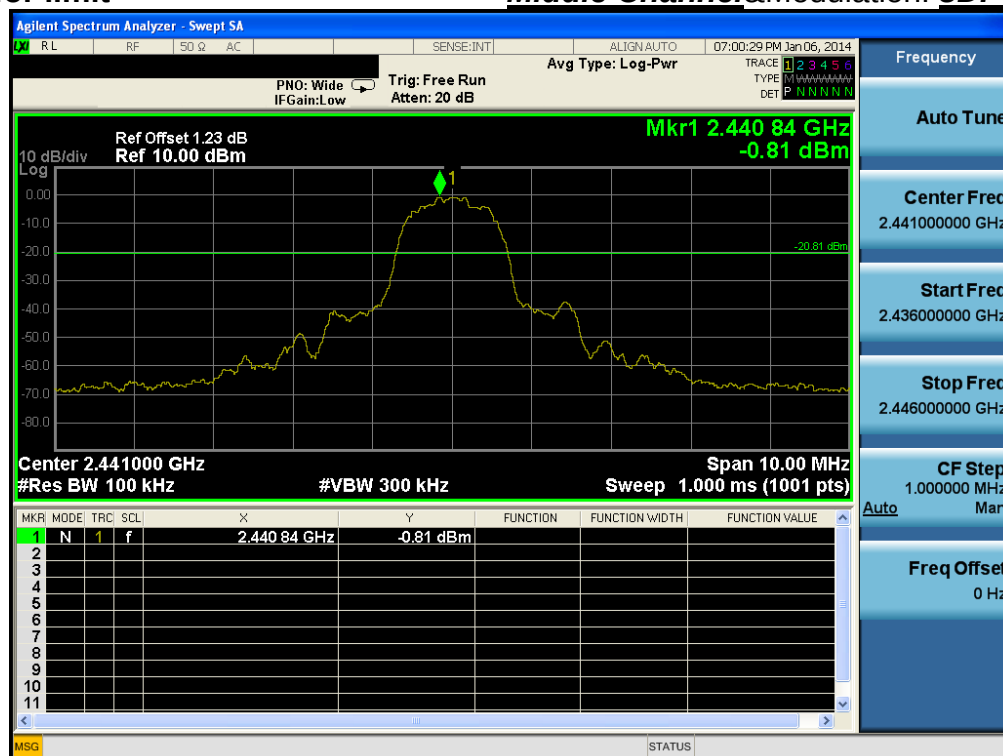Middle Channel&Modulation: 8DPSK

Conducted Spurious Emissions

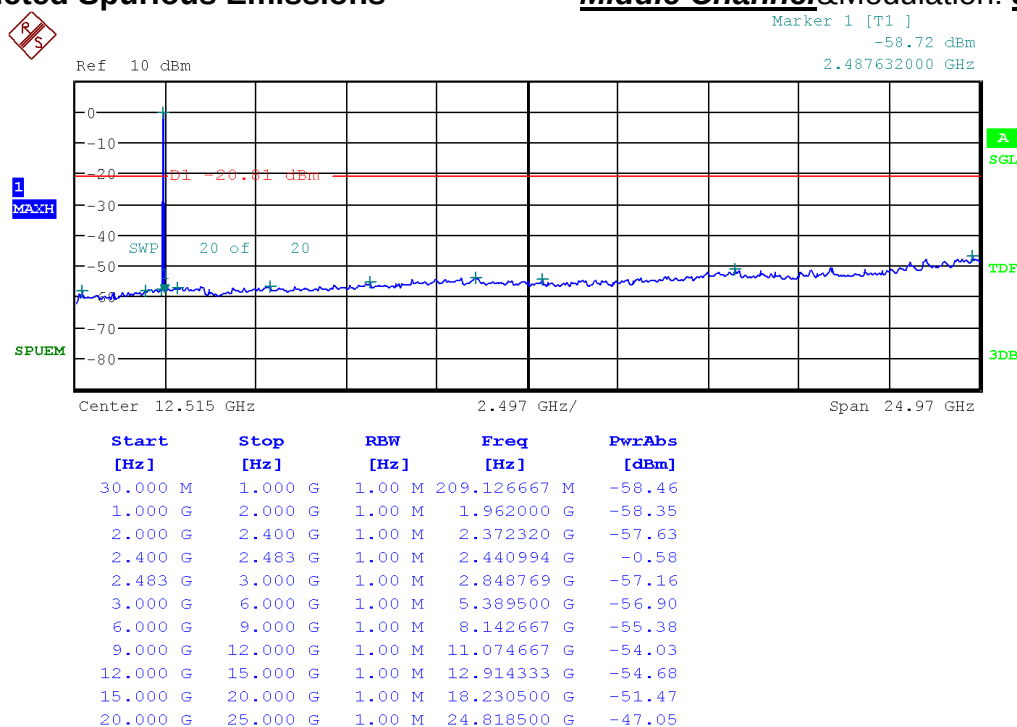Middle Channel&Modulation: 8DPSK

High Band-edge


Highest Channel&Modulation: **8DPSK**

High Band-edge

Hopping mode&Modulation: **8DPSK**


Conducted Spurious Emissions

Highest Channel & Modulation: 8DPSK

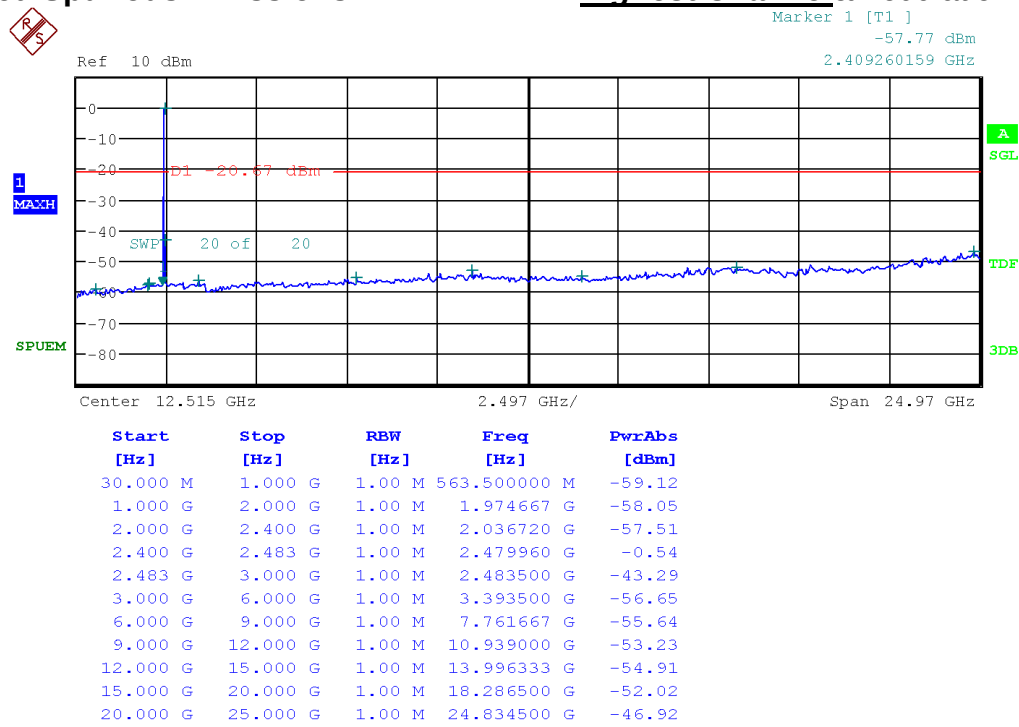


- L40VW2


Low Band-edge

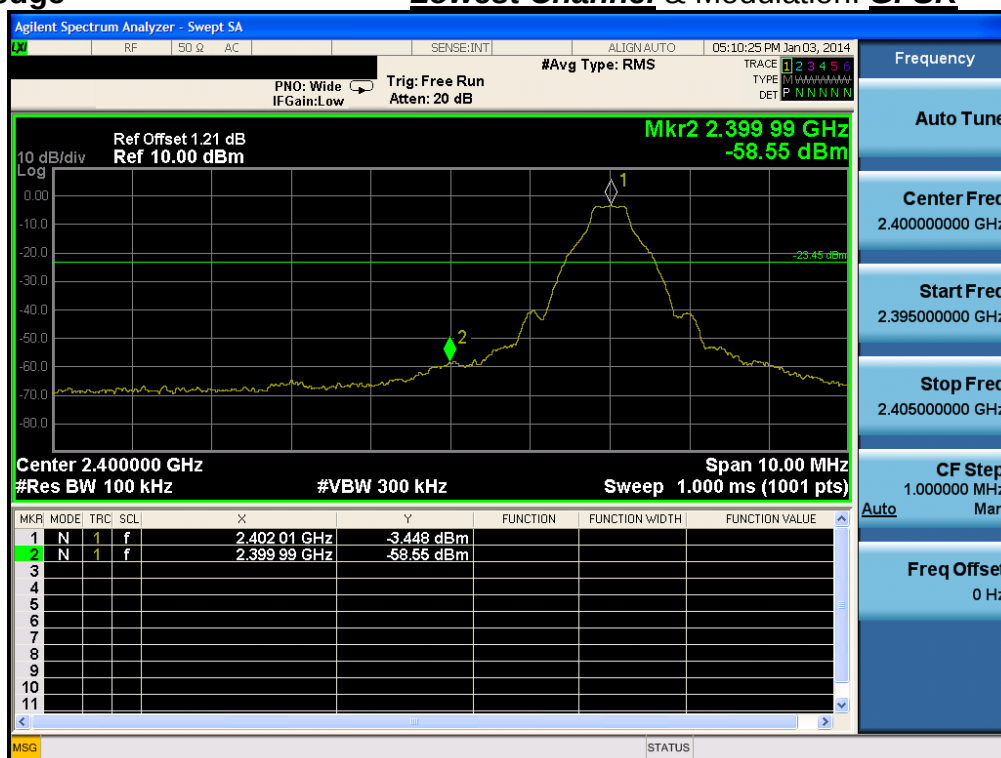Lowest Channel & Modulation: GFSK

Low Band-edge

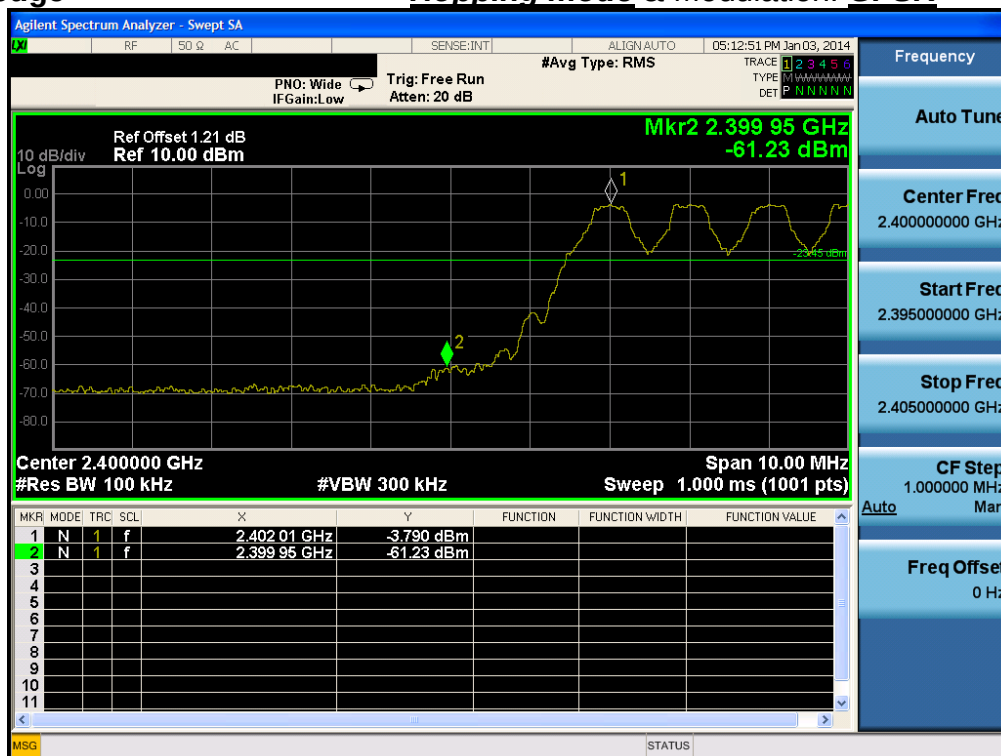Hopping mode & Modulation: GFSK


Conducted Spurious Emissions Lowest Channel & Modulation: GFSK

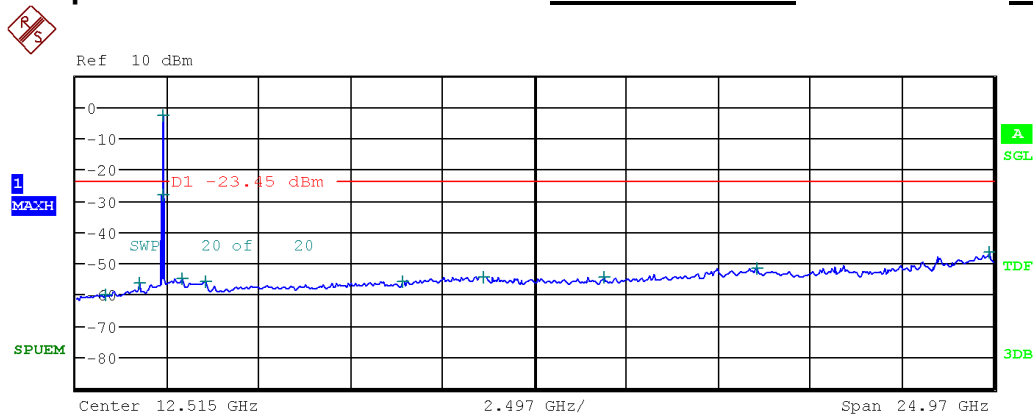

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	823.783333 M	-59.98
1.000 G	2.000 G	1.00 M	1.754667 G	-56.39
2.000 G	2.400 G	1.00 M	2.400000 G	-28.48
2.400 G	2.483 G	1.00 M	2.402163 G	-3.05
2.483 G	3.000 G	1.00 M	2.919633 G	-55.01
3.000 G	6.000 G	1.00 M	3.555000 G	-55.80
6.000 G	9.000 G	1.00 M	8.919667 G	-55.75
9.000 G	12.000 G	1.00 M	11.098000 G	-54.32
12.000 G	15.000 G	1.00 M	14.399333 G	-54.48
15.000 G	20.000 G	1.00 M	18.563500 G	-51.51
20.000 G	25.000 G	1.00 M	24.864000 G	-46.41


Reference for limit

Middle Channel & Modulation: GFSK

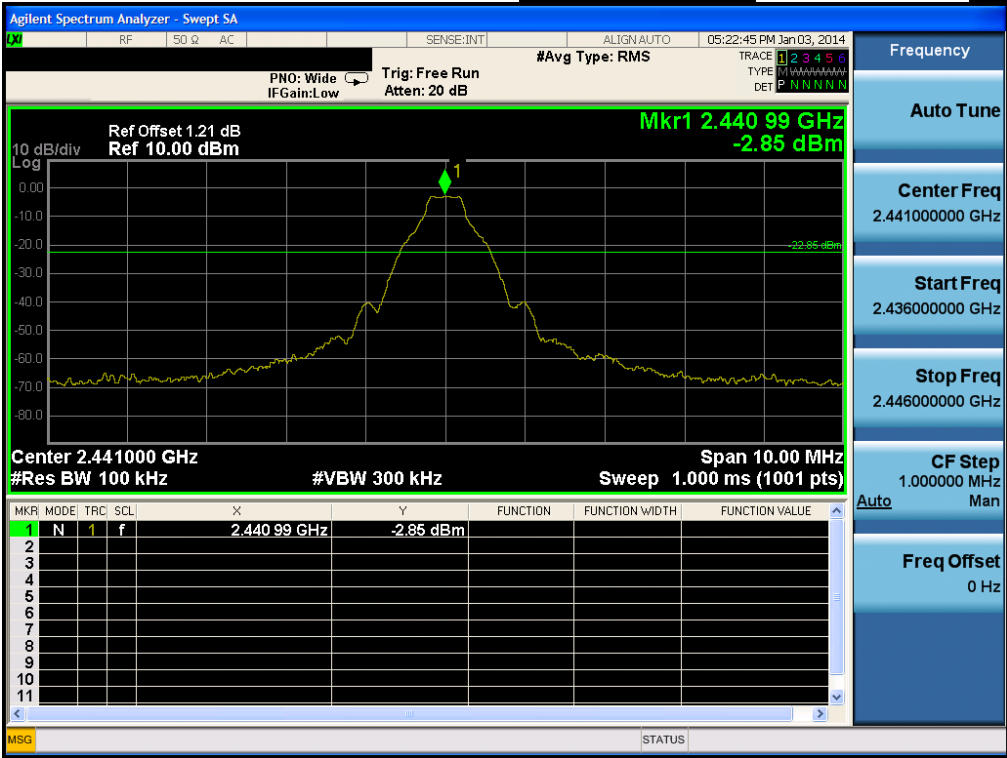


Conducted Spurious Emissions

Middle Channel & Modulation: GFSK

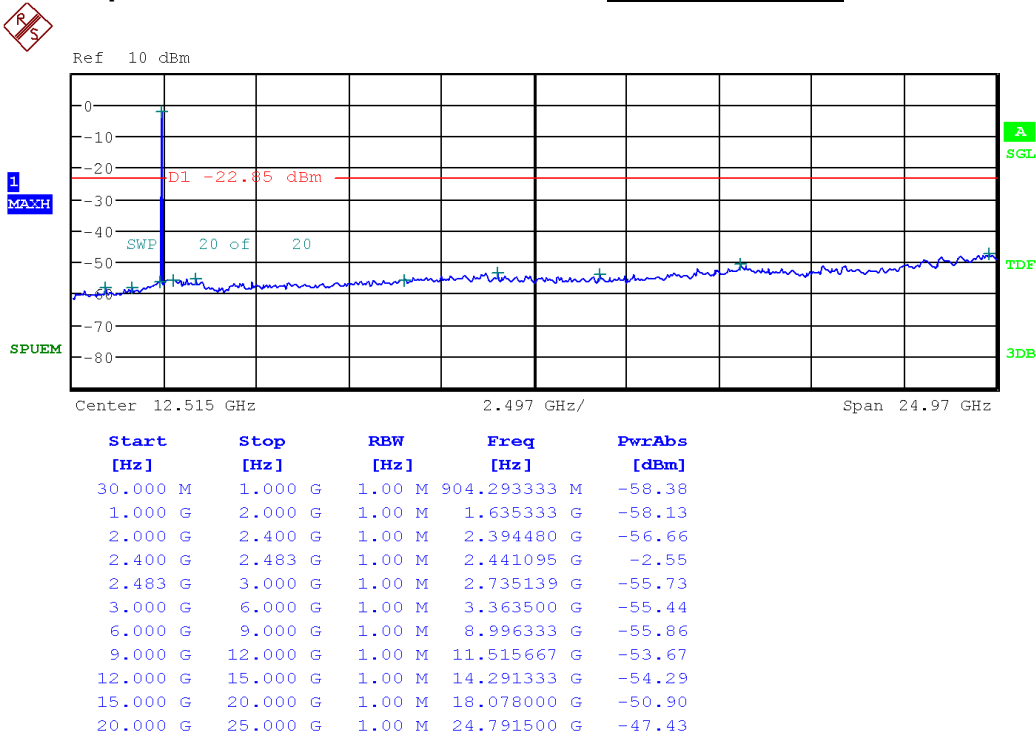


High Band-edge

Highest Channel & Modulation: **GFSK**

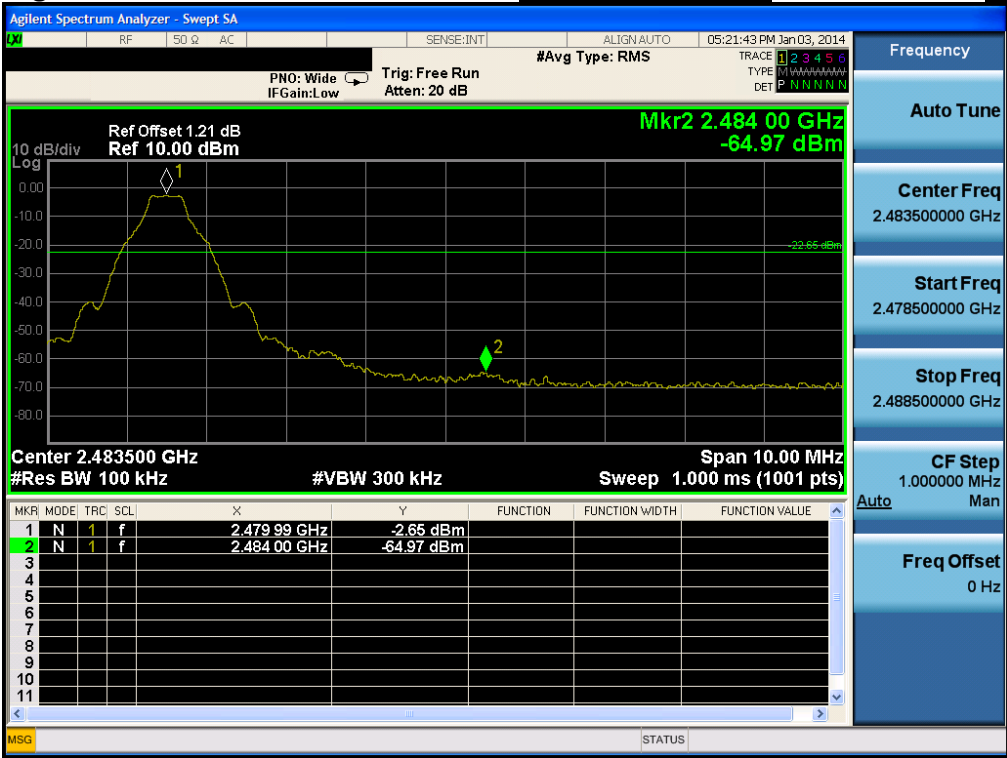


High Band-edge

Hopping mode & Modulation: **GFSK**

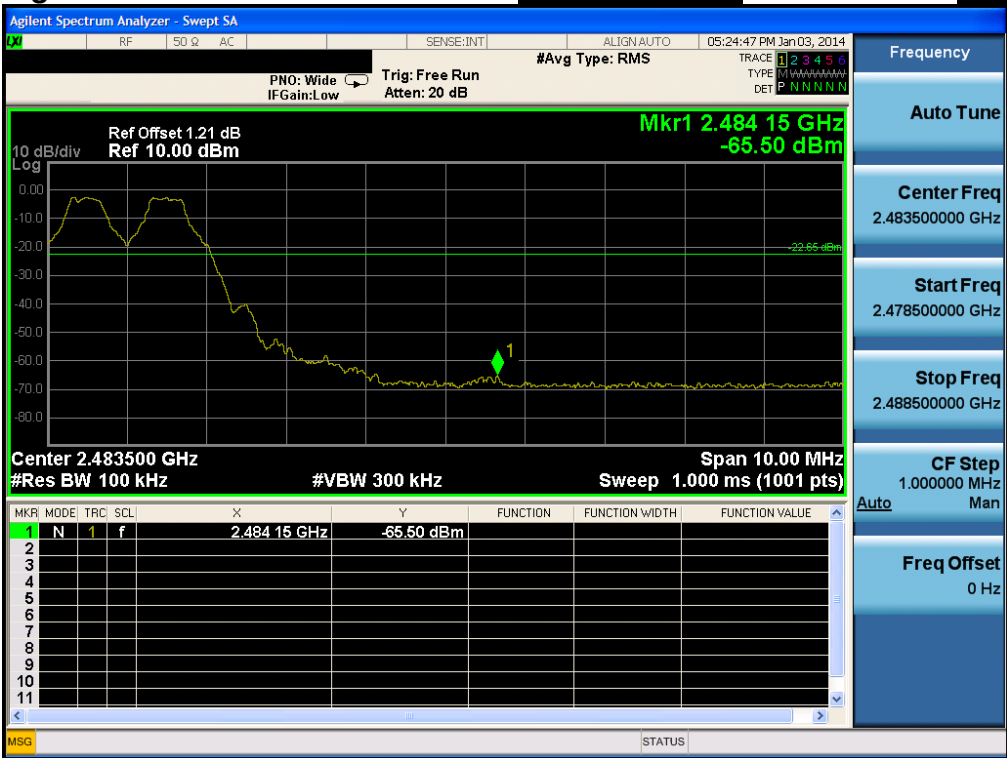

Conducted Spurious Emissions

Highest Channel & Modulation: **GFSK**

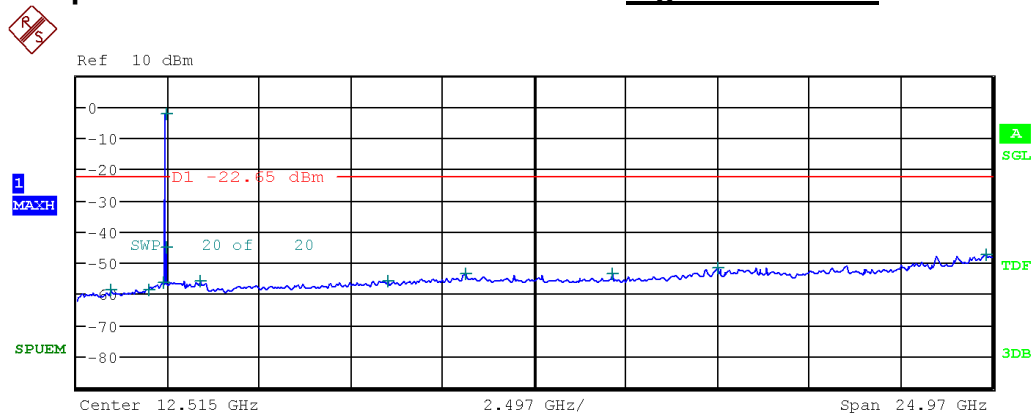

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	946.650000 M	-58.58
1.000 G	2.000 G	1.00 M	1.983000 G	-58.76
2.000 G	2.400 G	1.00 M	2.385480 G	-56.60
2.400 G	2.483 G	1.00 M	2.480206 G	-2.36
2.483 G	3.000 G	1.00 M	2.483500 G	-44.96
3.000 G	6.000 G	1.00 M	3.372500 G	-56.02
6.000 G	9.000 G	1.00 M	8.508000 G	-55.91
9.000 G	12.000 G	1.00 M	10.617333 G	-53.73
12.000 G	15.000 G	1.00 M	14.641667 G	-53.68
15.000 G	20.000 G	1.00 M	17.498000 G	-51.59
20.000 G	25.000 G	1.00 M	24.850000 G	-47.40

Low Band-edge


Lowest Channel & Modulation: $\pi/4$ DQPSK

Low Band-edge

Hopping mode & Modulation: $\pi/4$ DQPSK


Conducted Spurious Emissions

Lowest Channel & Modulation: $\pi/4$ DQPSK

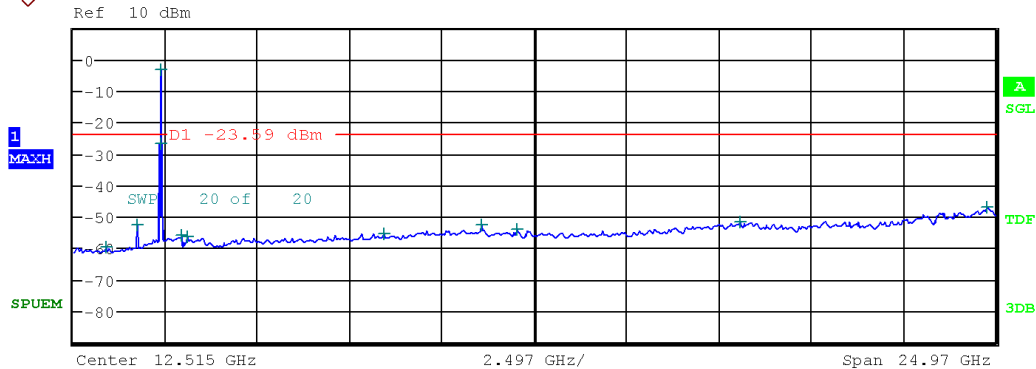


Start	Stop	RBW	Freq	PwrAbs
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]
30.000 M	1.000 G	1.00 M	907.203333 M	-59.89
1.000 G	2.000 G	1.00 M	1.752000 G	-52.73
2.000 G	2.400 G	1.00 M	2.400000 G	-26.72
2.400 G	2.483 G	1.00 M	2.402096 G	-3.27
2.483 G	3.000 G	1.00 M	2.932029 G	-56.18
3.000 G	6.000 G	1.00 M	3.126500 G	-56.24
6.000 G	9.000 G	1.00 M	8.440333 G	-55.39
9.000 G	12.000 G	1.00 M	11.086667 G	-52.78
12.000 G	15.000 G	1.00 M	12.047000 G	-53.87
15.000 G	20.000 G	1.00 M	18.078000 G	-51.77
20.000 G	25.000 G	1.00 M	24.767500 G	-47.25

Reference for limit

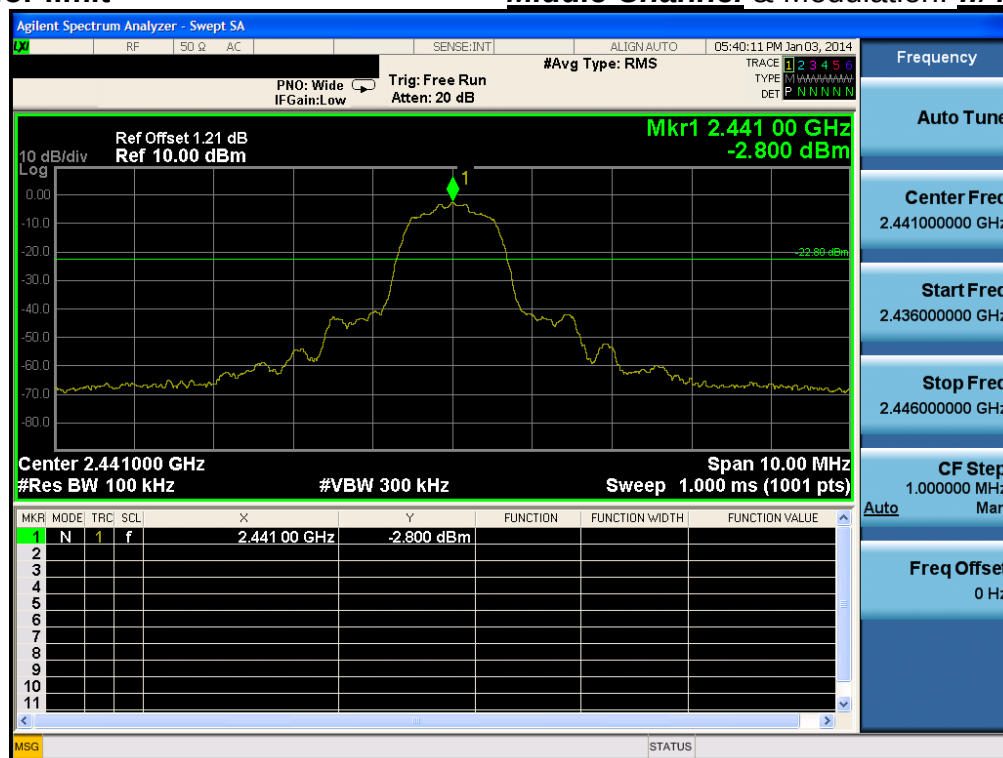Middle Channel & Modulation: $\pi/4$ DQPSK

Conducted Spurious Emissions

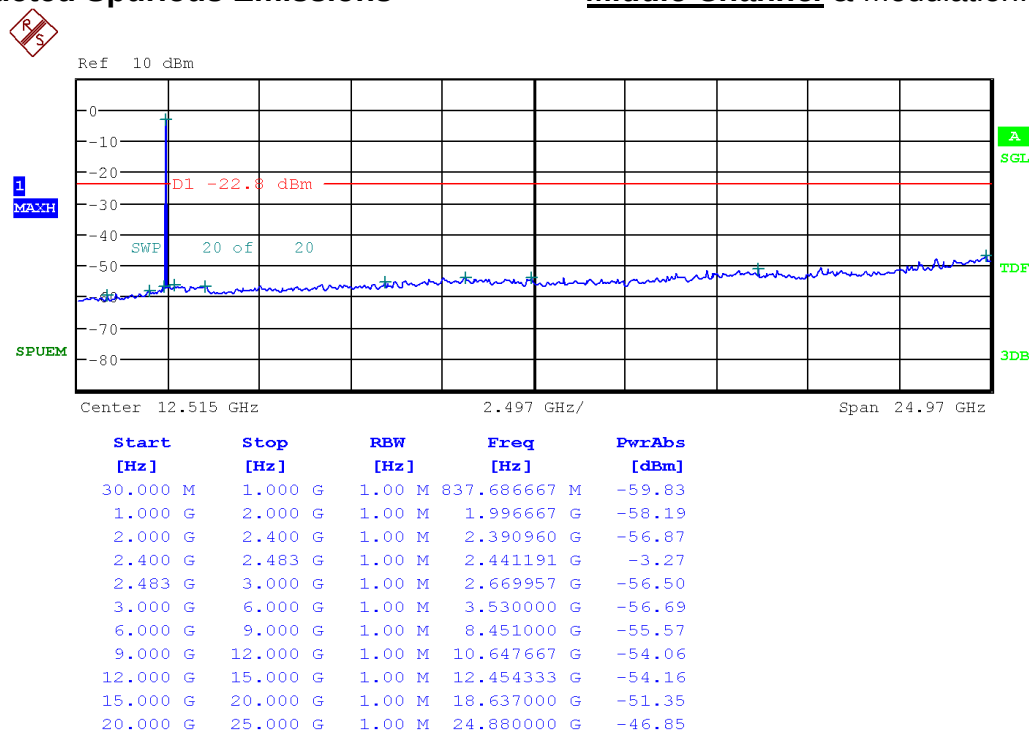Middle Channel & Modulation: $\pi/4$ DQPSK

High Band-edge


Highest Channel & Modulation: $\pi/4$ DQPSK

High Band-edge

Hopping mode & Modulation: $\pi/4$ DQPSK

Conducted Spurious Emissions

Highest Channel & Modulation: $\pi/4$ DQPSK

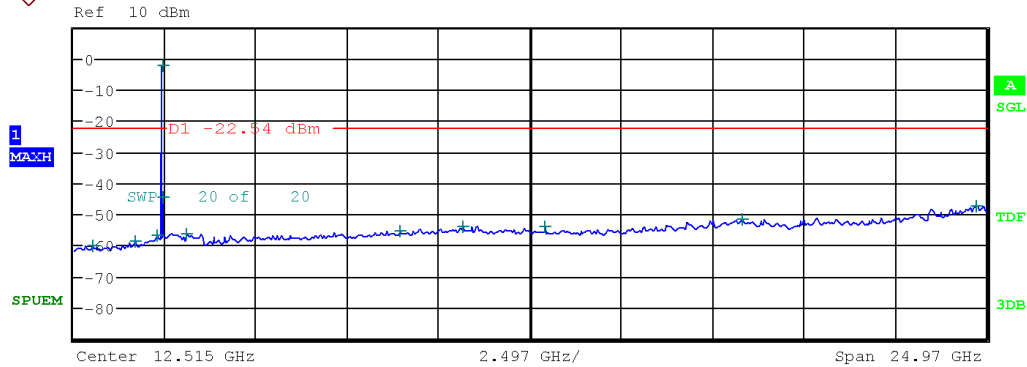

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	540.220000 M	-60.34
1.000 G	2.000 G	1.00 M	1.722667 G	-58.76
2.000 G	2.400 G	1.00 M	2.327120 G	-57.00
2.400 G	2.483 G	1.00 M	2.480198 G	-2.37
2.483 G	3.000 G	1.00 M	2.483500 G	-44.79
3.000 G	6.000 G	1.00 M	3.110500 G	-56.44
6.000 G	9.000 G	1.00 M	8.947000 G	-55.51
9.000 G	12.000 G	1.00 M	10.670333 G	-53.91
12.000 G	15.000 G	1.00 M	12.895667 G	-54.31
15.000 G	20.000 G	1.00 M	18.314500 G	-51.69
20.000 G	25.000 G	1.00 M	24.720000 G	-47.34

Low Band-edge

Lowest Channel & Modulation: 8DPSK

Low Band-edge

Hopping mode & Modulation: 8DPSK

Lowest Channel & Modulation: **8DPSK**

Ref 10 dBm

D1 -23.53 dBm


SWP 20 of 20

Center 12.515 GHz 2.497 GHz/ Span 24.97 GHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	856.440000 M	-59.03
1.000 G	2.000 G	1.00 M	1.859333 G	-59.16
2.000 G	2.400 G	1.00 M	2.400000 G	-26.81
2.400 G	2.483 G	1.00 M	2.401962 G	-2.98
2.483 G	3.000 G	1.00 M	2.552195 G	-55.97
3.000 G	6.000 G	1.00 M	5.742500 G	-55.93
6.000 G	9.000 G	1.00 M	8.402000 G	-54.83
9.000 G	12.000 G	1.00 M	10.629000 G	-53.70
12.000 G	15.000 G	1.00 M	13.557667 G	-54.46
15.000 G	20.000 G	1.00 M	18.502000 G	-51.73
20.000 G	25.000 G	1.00 M	24.810500 G	-46.68


Reference for limit

Middle Channel & Modulation: 8DPSK

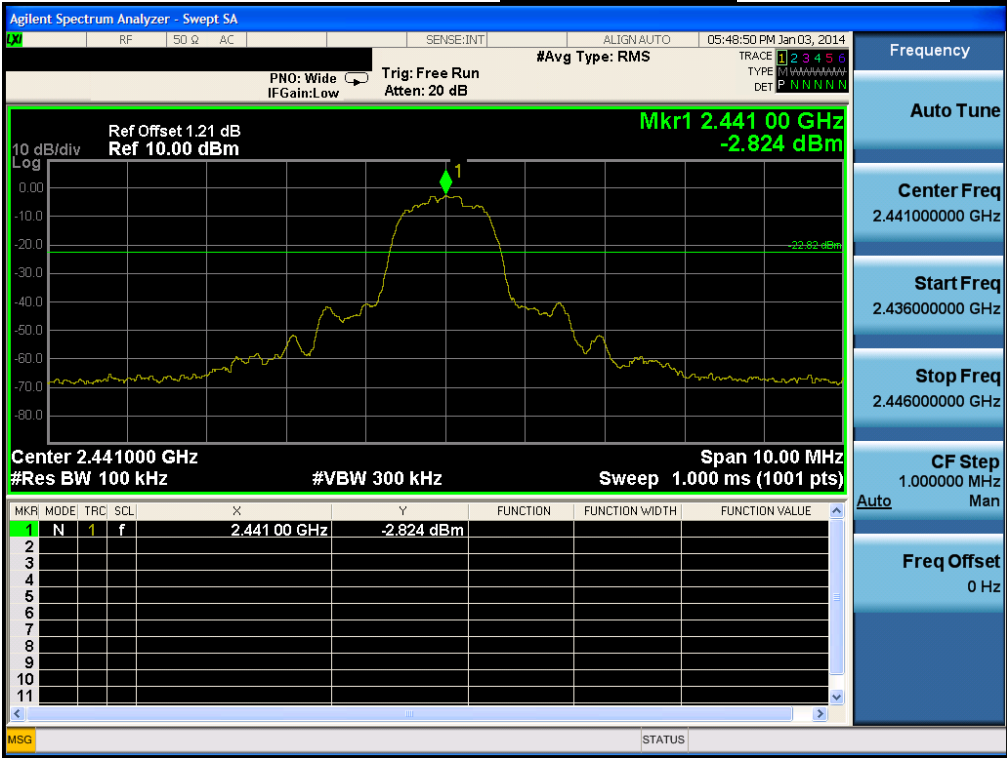

Conducted Spurious Emissions


Middle Channel & Modulation: 8DPSK

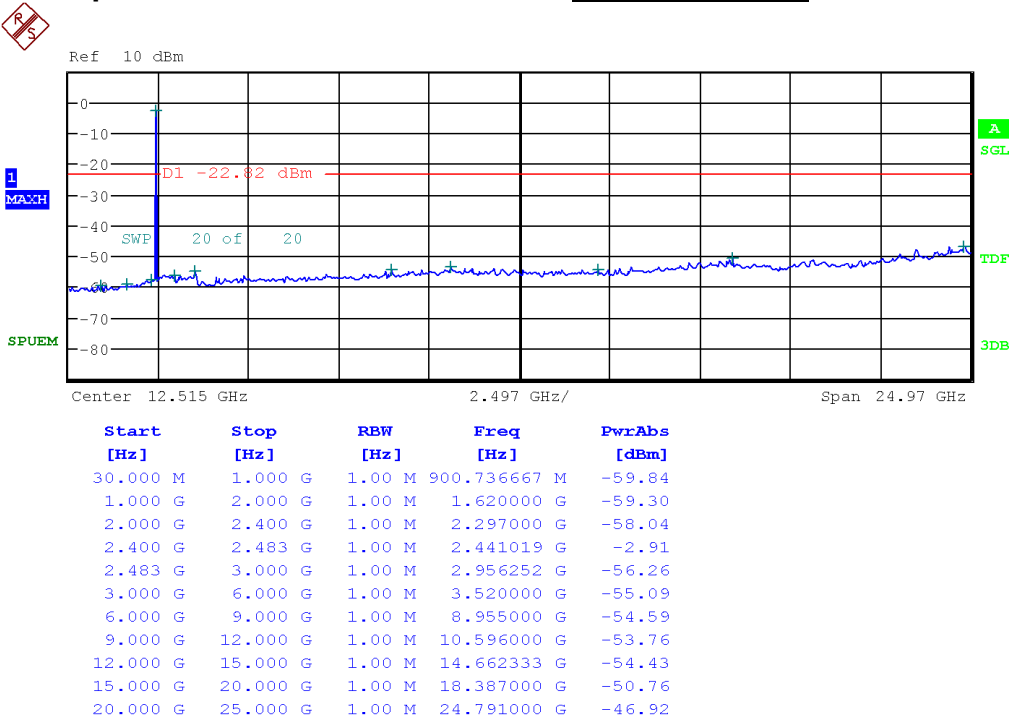

High Band-edge

Highest Channel & Modulation: 8DPSK

High Band-edge

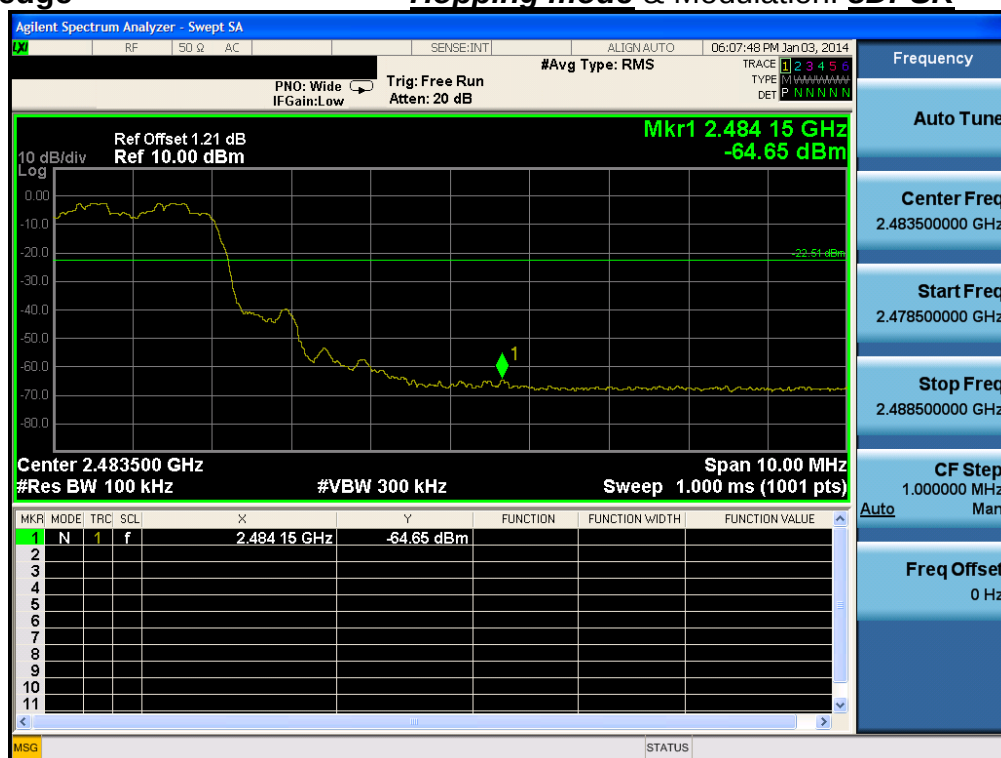Hopping mode & Modulation: 8DPSK

Highest Channel & Modulation: **8DPSK**

Ref 10 dBm

1 MACH


D1 -22.51 dBm

SWP 20 of 20

SPUEM

Center 12.515 GHz 2.497 GHz/ Span 24.97 GHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	423.173333 M	-60.29
1.000 G	2.000 G	1.00 M	1.486667 G	-59.05
2.000 G	2.400 G	1.00 M	2.236400 G	-56.98
2.400 G	2.483 G	1.00 M	2.480010 G	-2.03
2.483 G	3.000 G	1.00 M	2.483552 G	-44.57
3.000 G	6.000 G	1.00 M	5.040000 G	-55.53
6.000 G	9.000 G	1.00 M	8.982667 G	-54.89
9.000 G	12.000 G	1.00 M	9.514333 G	-53.81
12.000 G	15.000 G	1.00 M	13.948000 G	-54.57
15.000 G	20.000 G	1.00 M	19.031000 G	-51.22
20.000 G	25.000 G	1.00 M	24.843500 G	-47.33

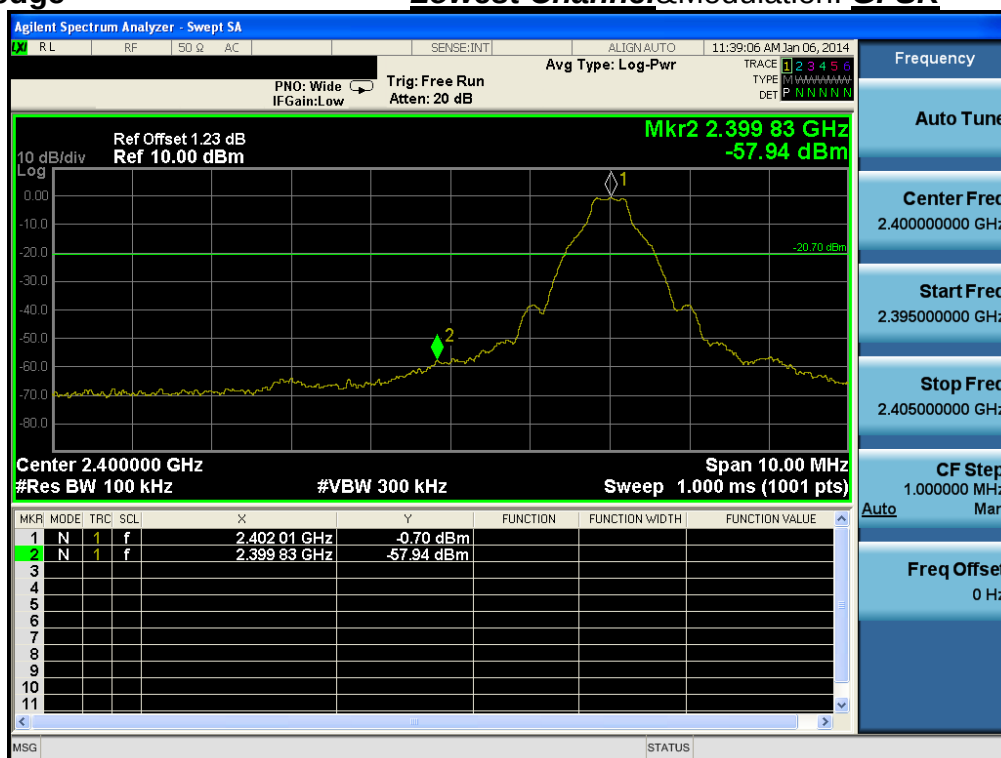- L41SK2
Low Band-edge***Lowest Channel***&Modulation: ***GFSK*****Low Band-edge*****Hopping mode***&Modulation: ***GFSK***


Lowest Channel&Modulation: **GFSK**



Start	Stop	RBW	Freq	PwrAbs
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]
30.000 M	1.000 G	1.00 M	935.333333 M	-59.67
1.000 G	2.000 G	1.00 M	1.736667 G	-54.48
2.000 G	2.400 G	1.00 M	2.400000 G	-25.82
2.400 G	2.483 G	1.00 M	2.401941 G	-0.41
2.483 G	3.000 G	1.00 M	2.860803 G	-55.20
3.000 G	6.000 G	1.00 M	3.521000 G	-56.26
6.000 G	9.000 G	1.00 M	8.171667 G	-55.11
9.000 G	12.000 G	1.00 M	10.662000 G	-54.10
12.000 G	15.000 G	1.00 M	12.365333 G	-54.50
15.000 G	20.000 G	1.00 M	18.070500 G	-51.91
20.000 G	25.000 G	1.00 M	24.822500 G	-48.02


Reference for limit

Middle Channel&Modulation: **GFSK**

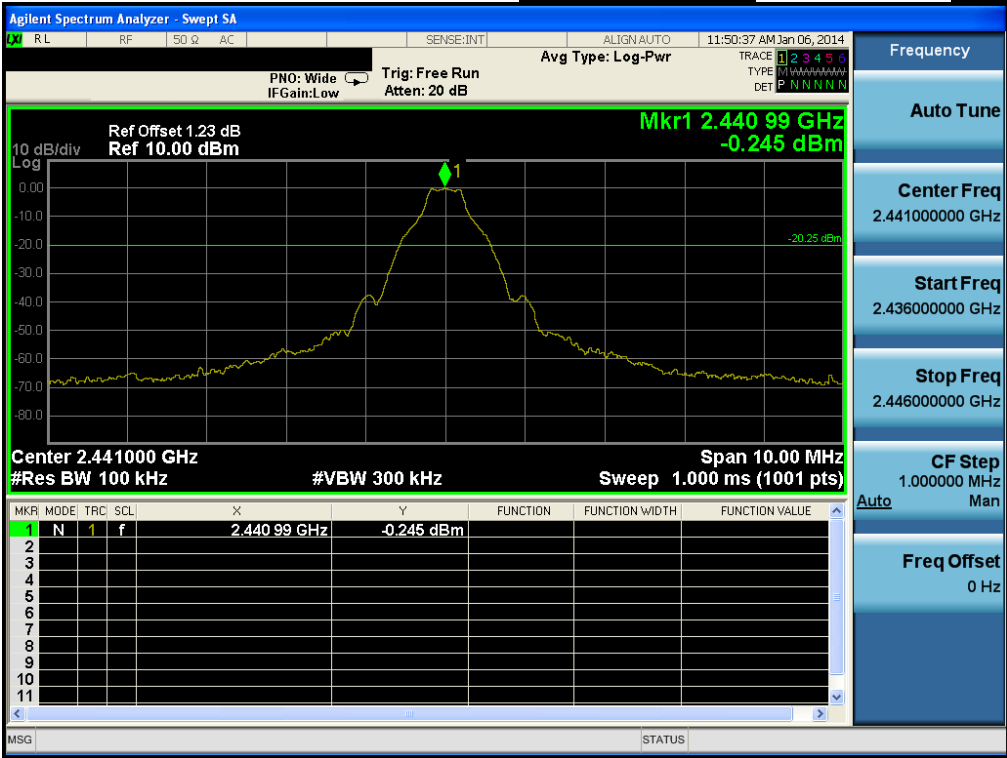


Conducted Spurious Emissions

Middle Channel&Modulation: **GFSK**

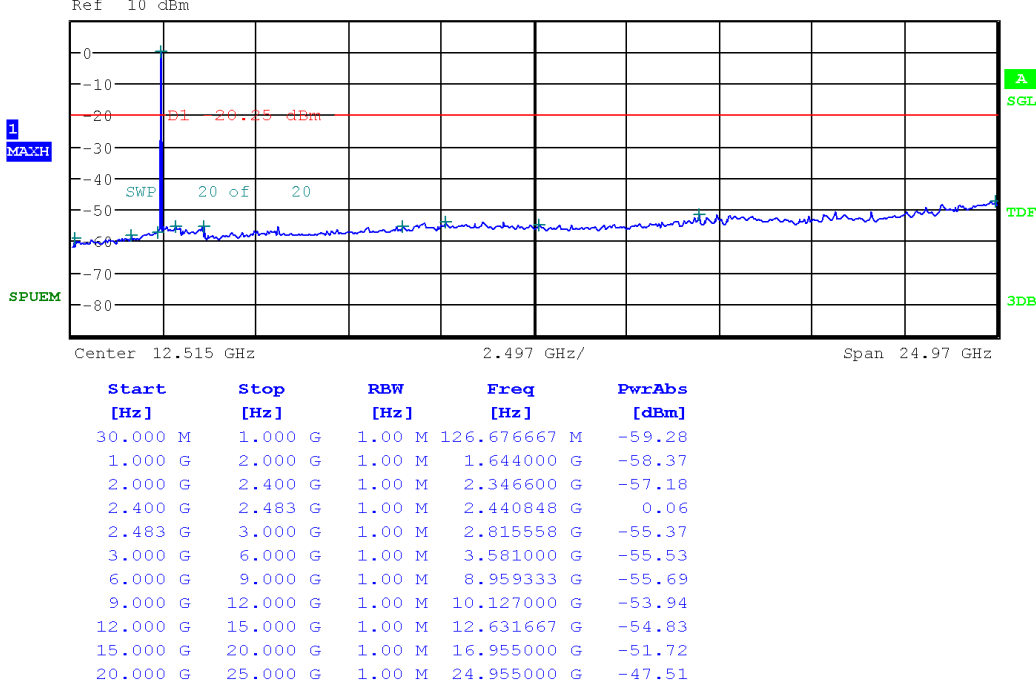


High Band-edge

Highest Channel&Modulation: *GFSK*

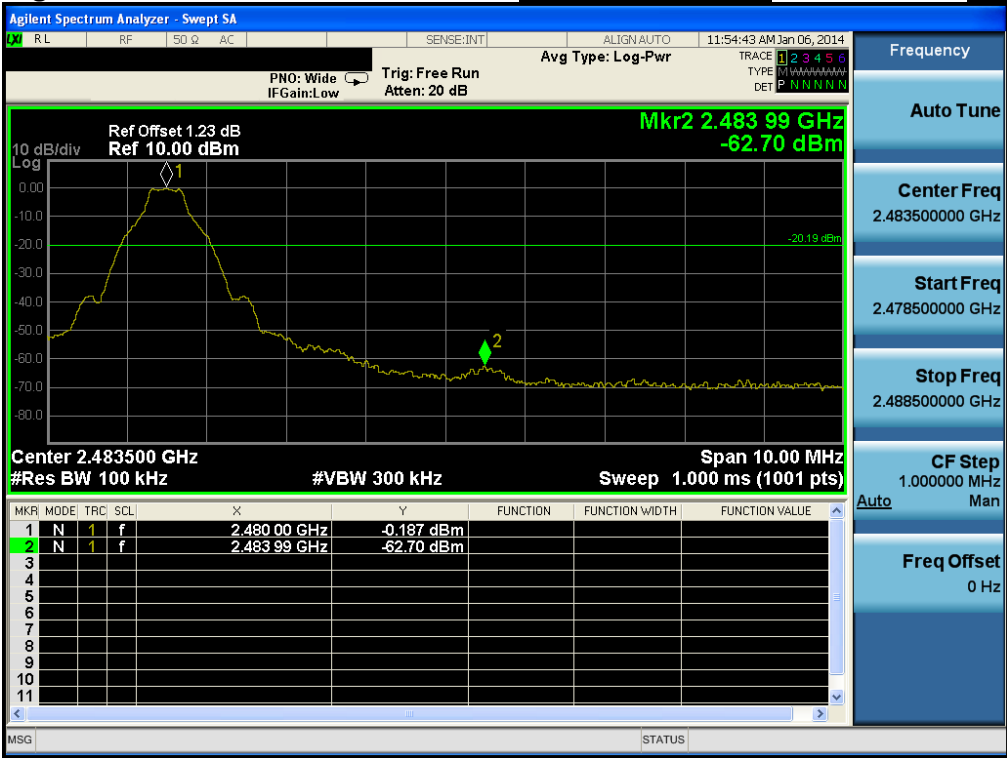


High Band-edge

Hopping mode&Modulation: *GFSK*

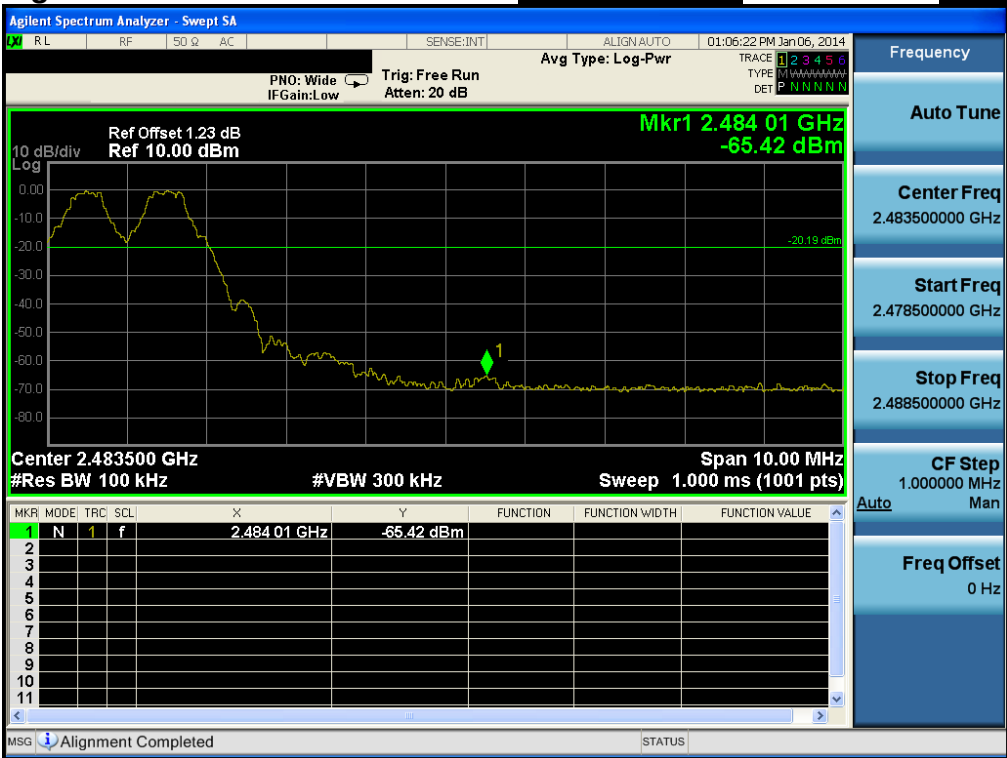

Conducted Spurious Emissions

Highest Channel& Modulation: GFSK

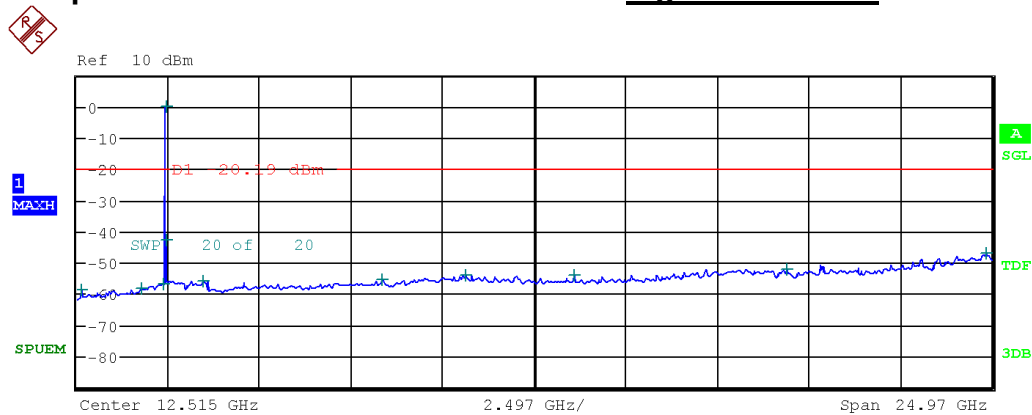

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	165.800000 M	-58.60
1.000 G	2.000 G	1.00 M	1.786667 G	-58.28
2.000 G	2.400 G	1.00 M	2.398280 G	-57.02
2.400 G	2.483 G	1.00 M	2.480006 G	0.11
2.483 G	3.000 G	1.00 M	2.483500 G	-42.59
3.000 G	6.000 G	1.00 M	3.482500 G	-55.74
6.000 G	9.000 G	1.00 M	8.358667 G	-55.65
9.000 G	12.000 G	1.00 M	10.628000 G	-53.91
12.000 G	15.000 G	1.00 M	13.576333 G	-54.03
15.000 G	20.000 G	1.00 M	19.396500 G	-52.28
20.000 G	25.000 G	1.00 M	24.829000 G	-47.08

Low Band-edge

Lowest Channel&Modulation: $\pi/4$ DQPSK




Low Band-edge

Hopping mode&Modulation: $\pi/4$ DQPSK




Conducted Spurious Emissions

Lowest Channel&Modulation: **$\pi/4$ DQPSK**

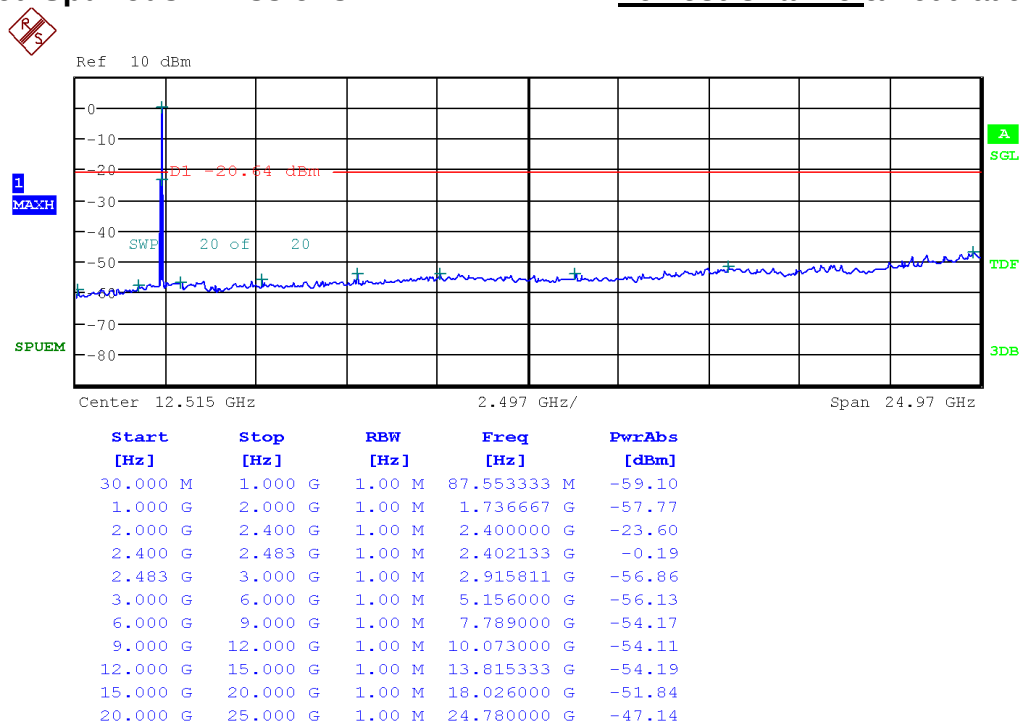


Reference for limit

Middle Channel&Modulation: $\pi/4$ DQPSK

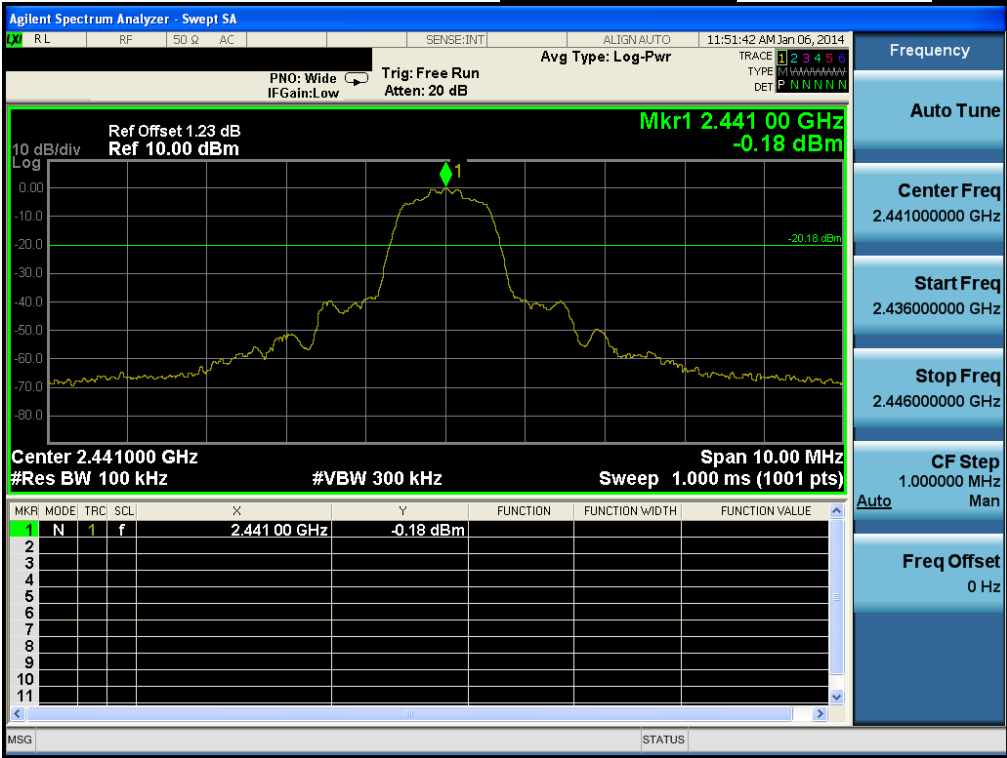

Conducted Spurious Emissions

Middle Channel&Modulation: $\pi/4$ DQPSK

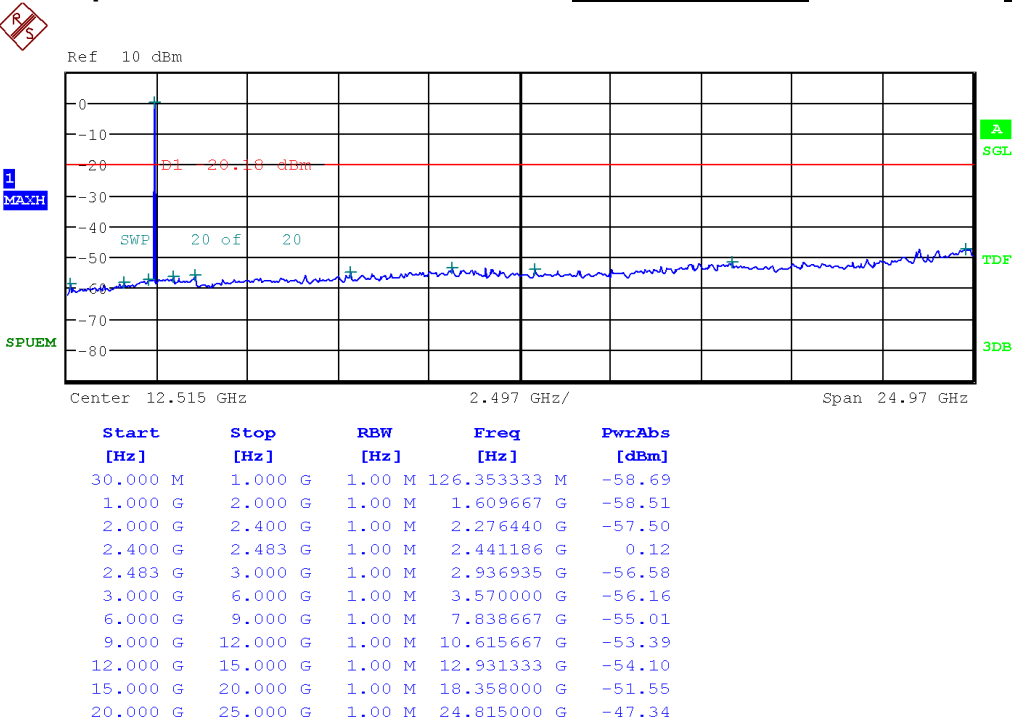

High Band-edge


Highest Channel&Modulation: $\pi/4$ DQPSK

High Band-edge

Hopping mode&Modulation: $\pi/4$ DQPSK

Conducted Spurious Emissions

Highest Channel&Modulation: $\pi/4$ DQPSK

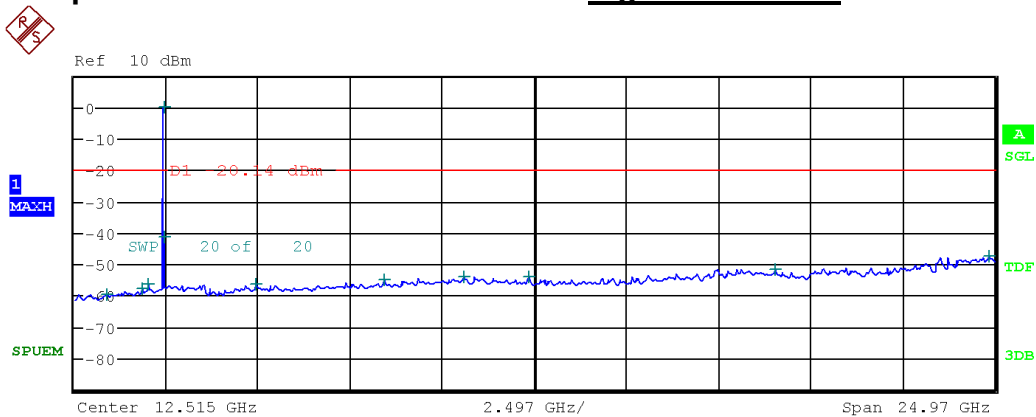

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	922.076667 M	-59.55
1.000 G	2.000 G	1.00 M	1.879667 G	-57.78
2.000 G	2.400 G	1.00 M	2.028240 G	-56.41
2.400 G	2.483 G	1.00 M	2.480147 G	0.07
2.483 G	3.000 G	1.00 M	2.483500 G	-41.33
3.000 G	6.000 G	1.00 M	4.959000 G	-56.38
6.000 G	9.000 G	1.00 M	8.450000 G	-54.97
9.000 G	12.000 G	1.00 M	10.601000 G	-54.14
12.000 G	15.000 G	1.00 M	12.341667 G	-54.30
15.000 G	20.000 G	1.00 M	19.046500 G	-51.66
20.000 G	25.000 G	1.00 M	24.822500 G	-47.70

Low Band-edge

Lowest Channel&Modulation: 8DPSK




Low Band-edge

Hopping mode&Modulation: 8DPSK



Conducted Spurious Emissions


Lowest Channel&Modulation: 8DPSK

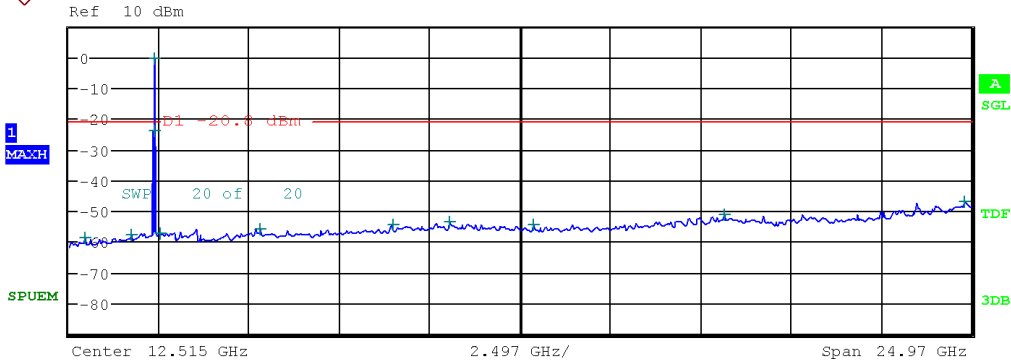

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	461.973333 M	-58.82
1.000 G	2.000 G	1.00 M	1.763667 G	-58.03
2.000 G	2.400 G	1.00 M	2.400000 G	-24.21
2.400 G	2.483 G	1.00 M	2.401996 G	-0.56
2.483 G	3.000 G	1.00 M	2.546048 G	-57.21
3.000 G	6.000 G	1.00 M	5.328500 G	-55.76
6.000 G	9.000 G	1.00 M	8.986000 G	-54.78
9.000 G	12.000 G	1.00 M	10.548667 G	-53.79
12.000 G	15.000 G	1.00 M	12.866333 G	-54.40
15.000 G	20.000 G	1.00 M	18.144000 G	-51.23
20.000 G	25.000 G	1.00 M	24.806000 G	-47.19


Reference for limit

Middle Channel&Modulation: 8DPSK

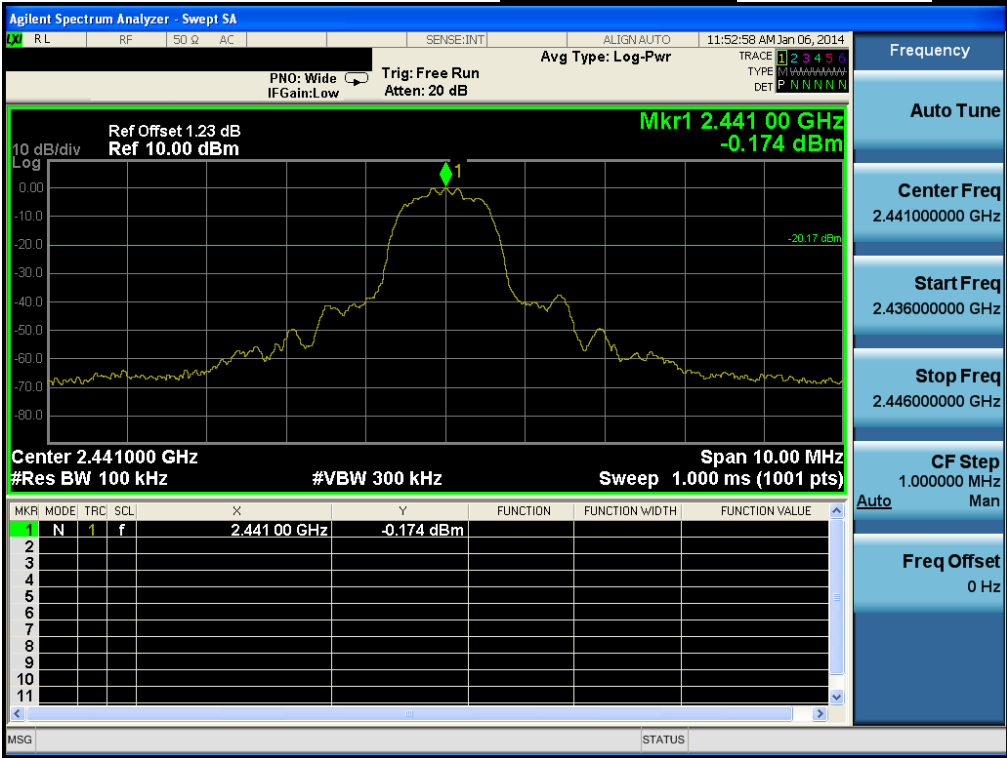

Conducted Spurious Emissions

Middle Channel&Modulation: 8DPSK

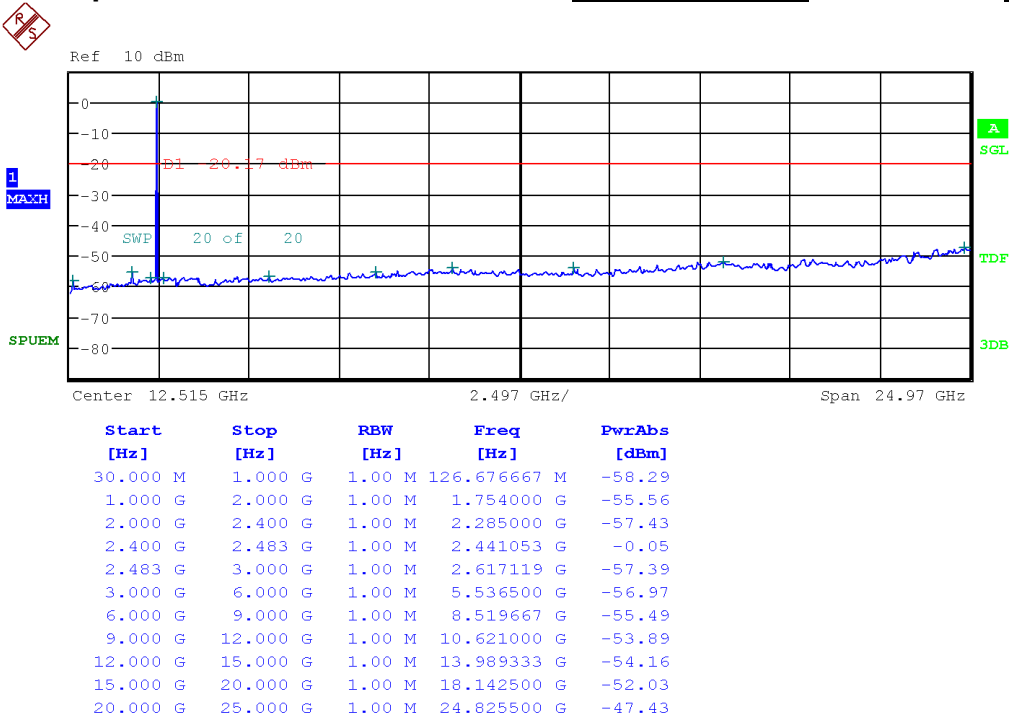


High Band-edge

Highest Channel&Modulation: **8DPSK**

High Band-edge


Hopping mode&Modulation: **8DPSK**

Highest Channel&Modulation: **8DPSK**

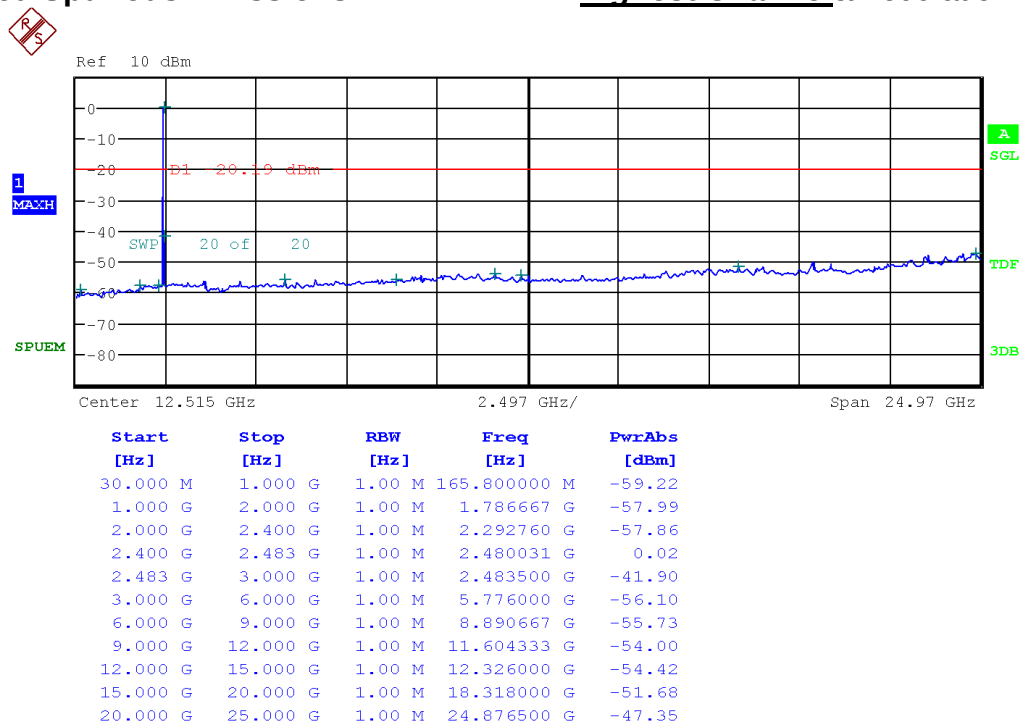


- L41VW2

Low Band-edge

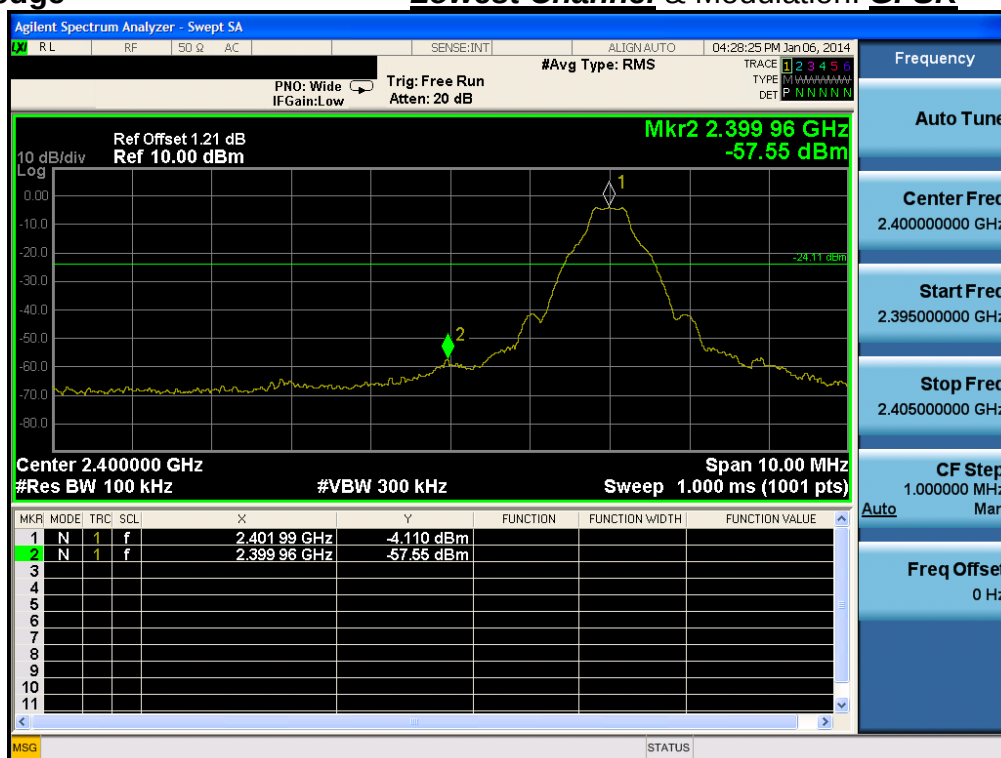
Lowest Channel & Modulation: GFSK

Low Band-edge

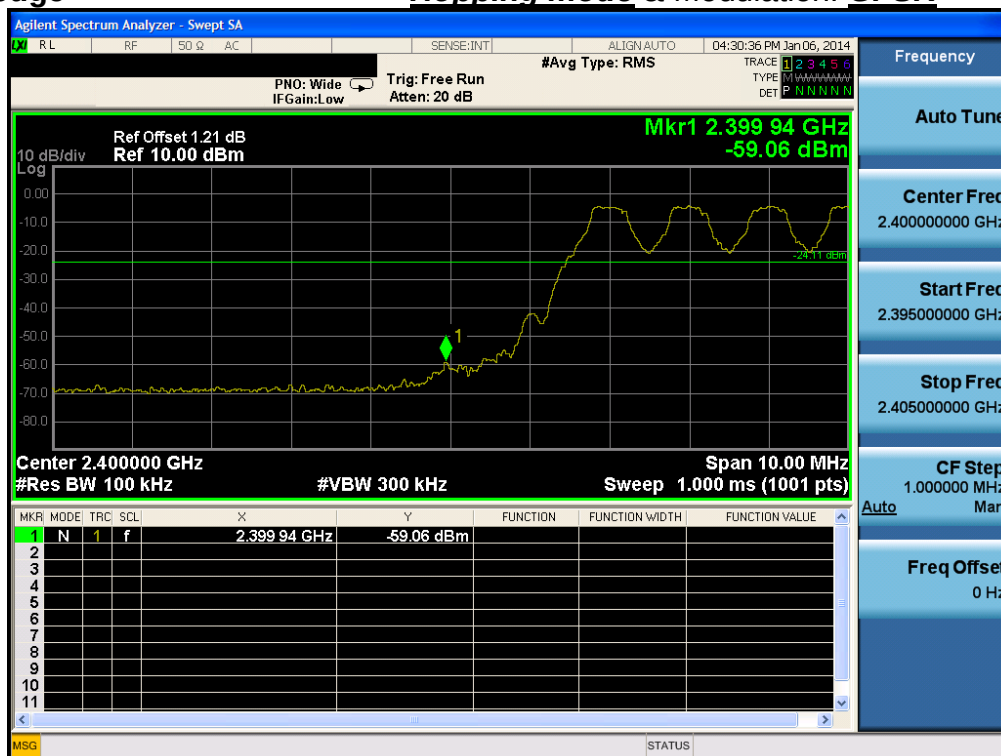
Hopping mode & Modulation: GFSK

Conducted Spurious Emissions


Lowest Channel & Modulation: GFSK

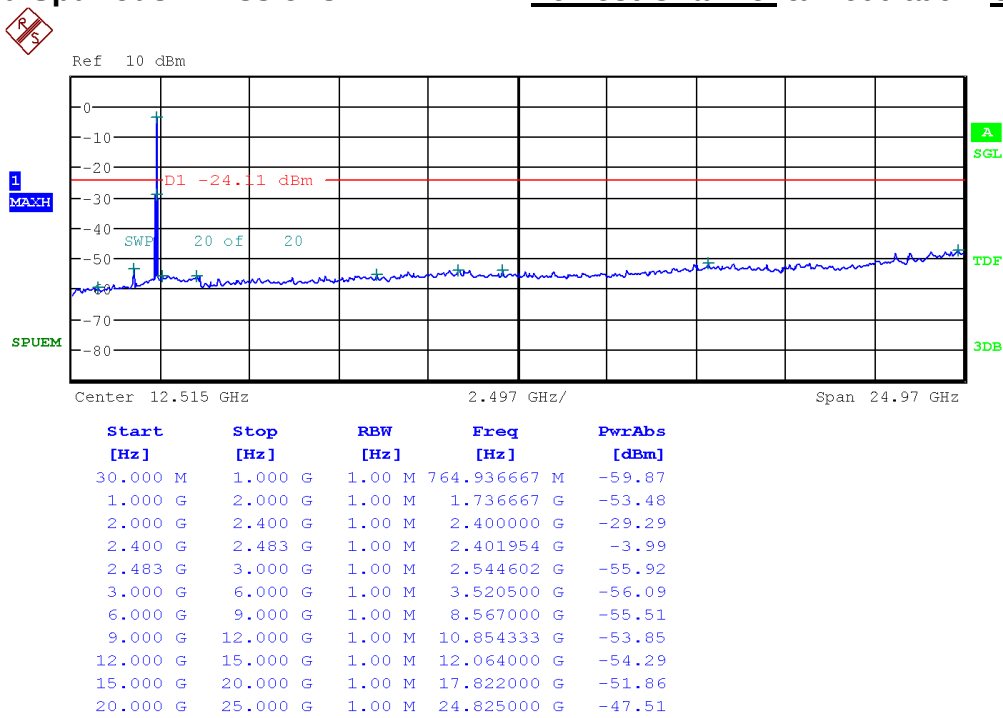


Reference for limit

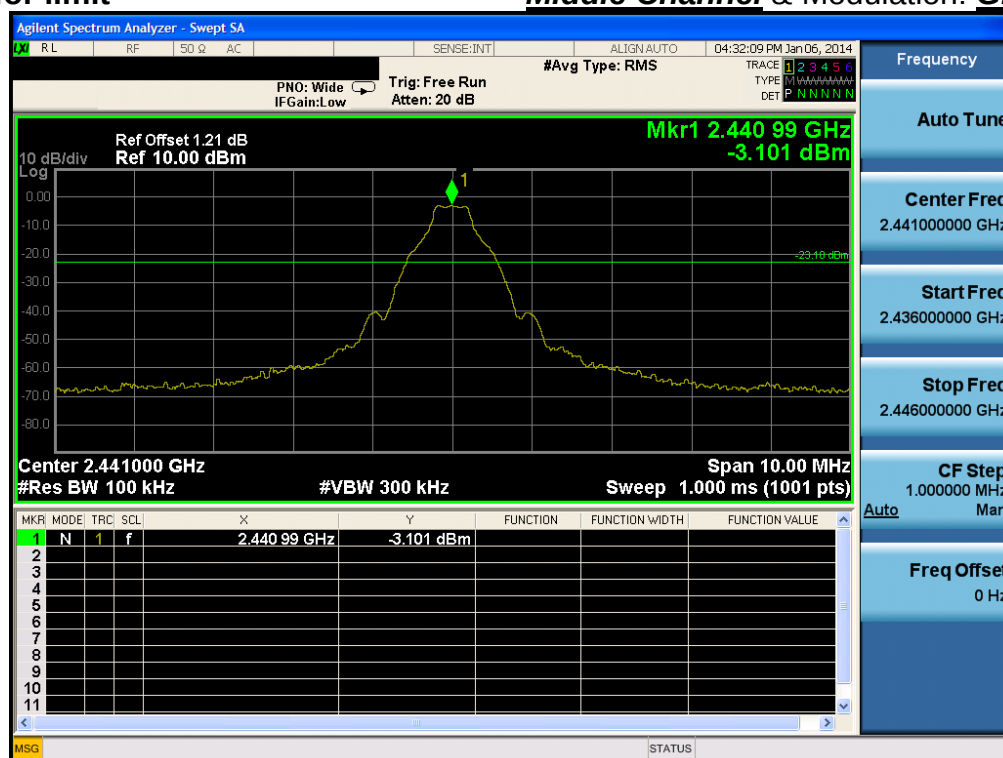Middle Channel & Modulation: GFSK


Conducted Spurious Emissions

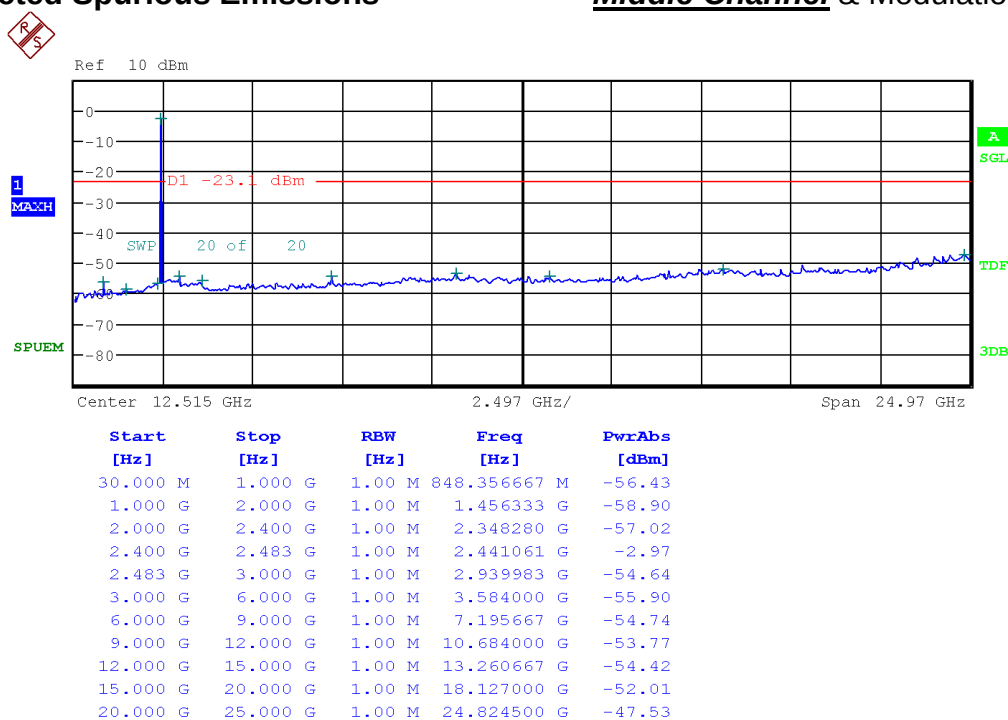Middle Channel & Modulation: GFSK

High Band-edge

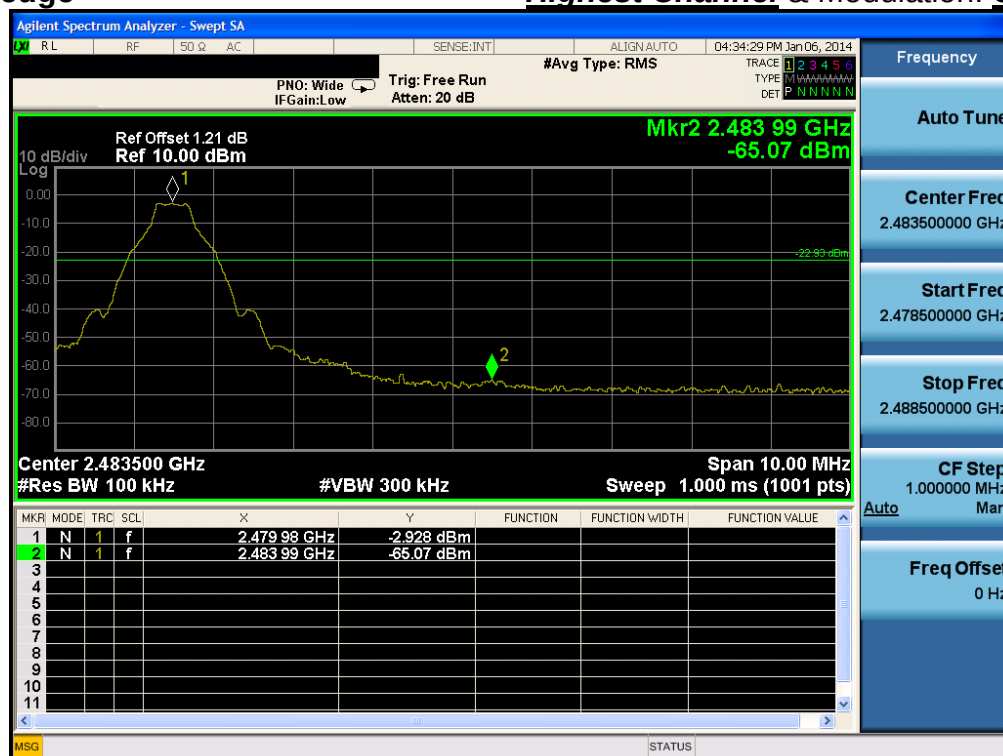
Highest Channel & Modulation: GFSK

High Band-edge

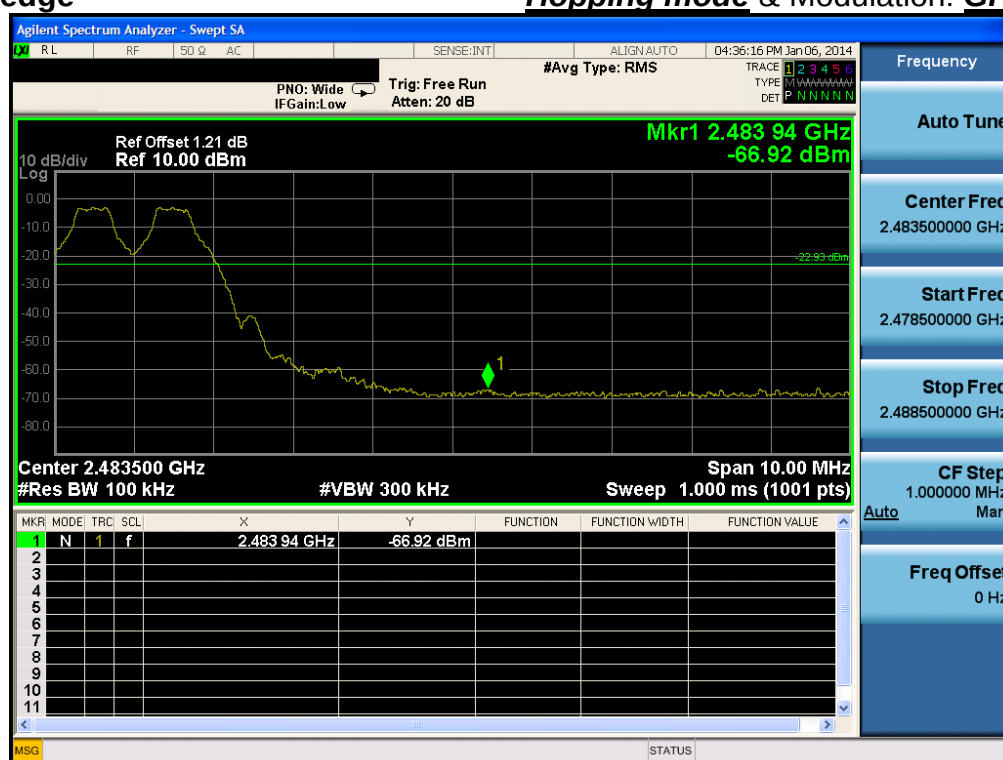Hopping mode & Modulation: GFSK

Conducted Spurious Emissions

Highest Channel & Modulation: GFSK

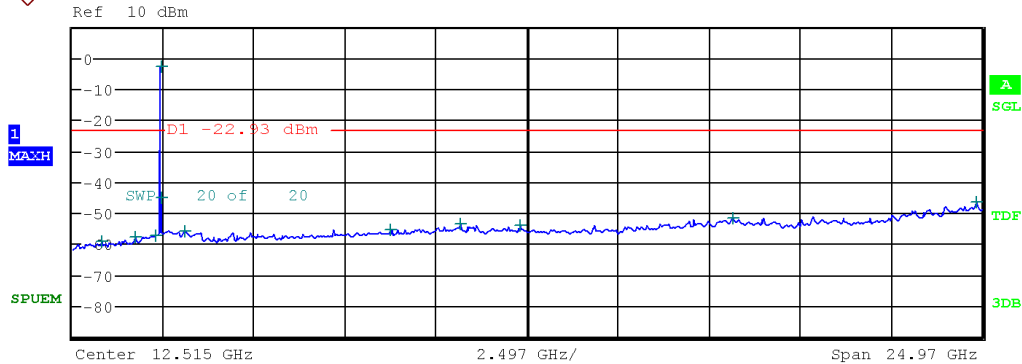

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	819.903333 M	-59.39
1.000 G	2.000 G	1.00 M	1.754000 G	-57.81
2.000 G	2.400 G	1.00 M	2.293640 G	-57.34
2.400 G	2.483 G	1.00 M	2.480143 G	-2.75
2.483 G	3.000 G	1.00 M	2.483500 G	-45.14
3.000 G	6.000 G	1.00 M	3.101000 G	-56.15
6.000 G	9.000 G	1.00 M	8.759667 G	-55.34
9.000 G	12.000 G	1.00 M	10.663333 G	-53.68
12.000 G	15.000 G	1.00 M	12.302000 G	-54.13
15.000 G	20.000 G	1.00 M	18.165000 G	-51.76
20.000 G	25.000 G	1.00 M	24.841500 G	-46.70