

Appendix 2. Photographs of EUT in side PCB



DC/DC CONVERTER

SER.NO

DGD525A297M

PIN1:280Vsetup
PIN3:15V1
PIN4:FC1
PIN6:110VAC
PIN7:15V2
PIN8:FC2
PIN10:(-)/W


PIN1:15VFC3
PIN2:5.1NC
PIN12:Vse


PART NO:6871QPH006A

INPUT +5VDC	== / 3A MAX
OUTPUT +15VDC	== / 50mA
OUTPUT +15VDC	== / 100mA
OUTPUT (VSC) +DC 110V	== / 50mA MAX
OUTPUT (Vsetup) +DC 200V	== / 50mA MAX
INPUT (VS) +DC 180V	== / 0.30A MAX
OUTPUT (-V) -DC 50V	== / 50mA MAX

CAUTION
For Continued protection against risk of fire
replace only with same type and rating of fuse

DAE GIL Engineering 020309 DGSP500W REV.A3

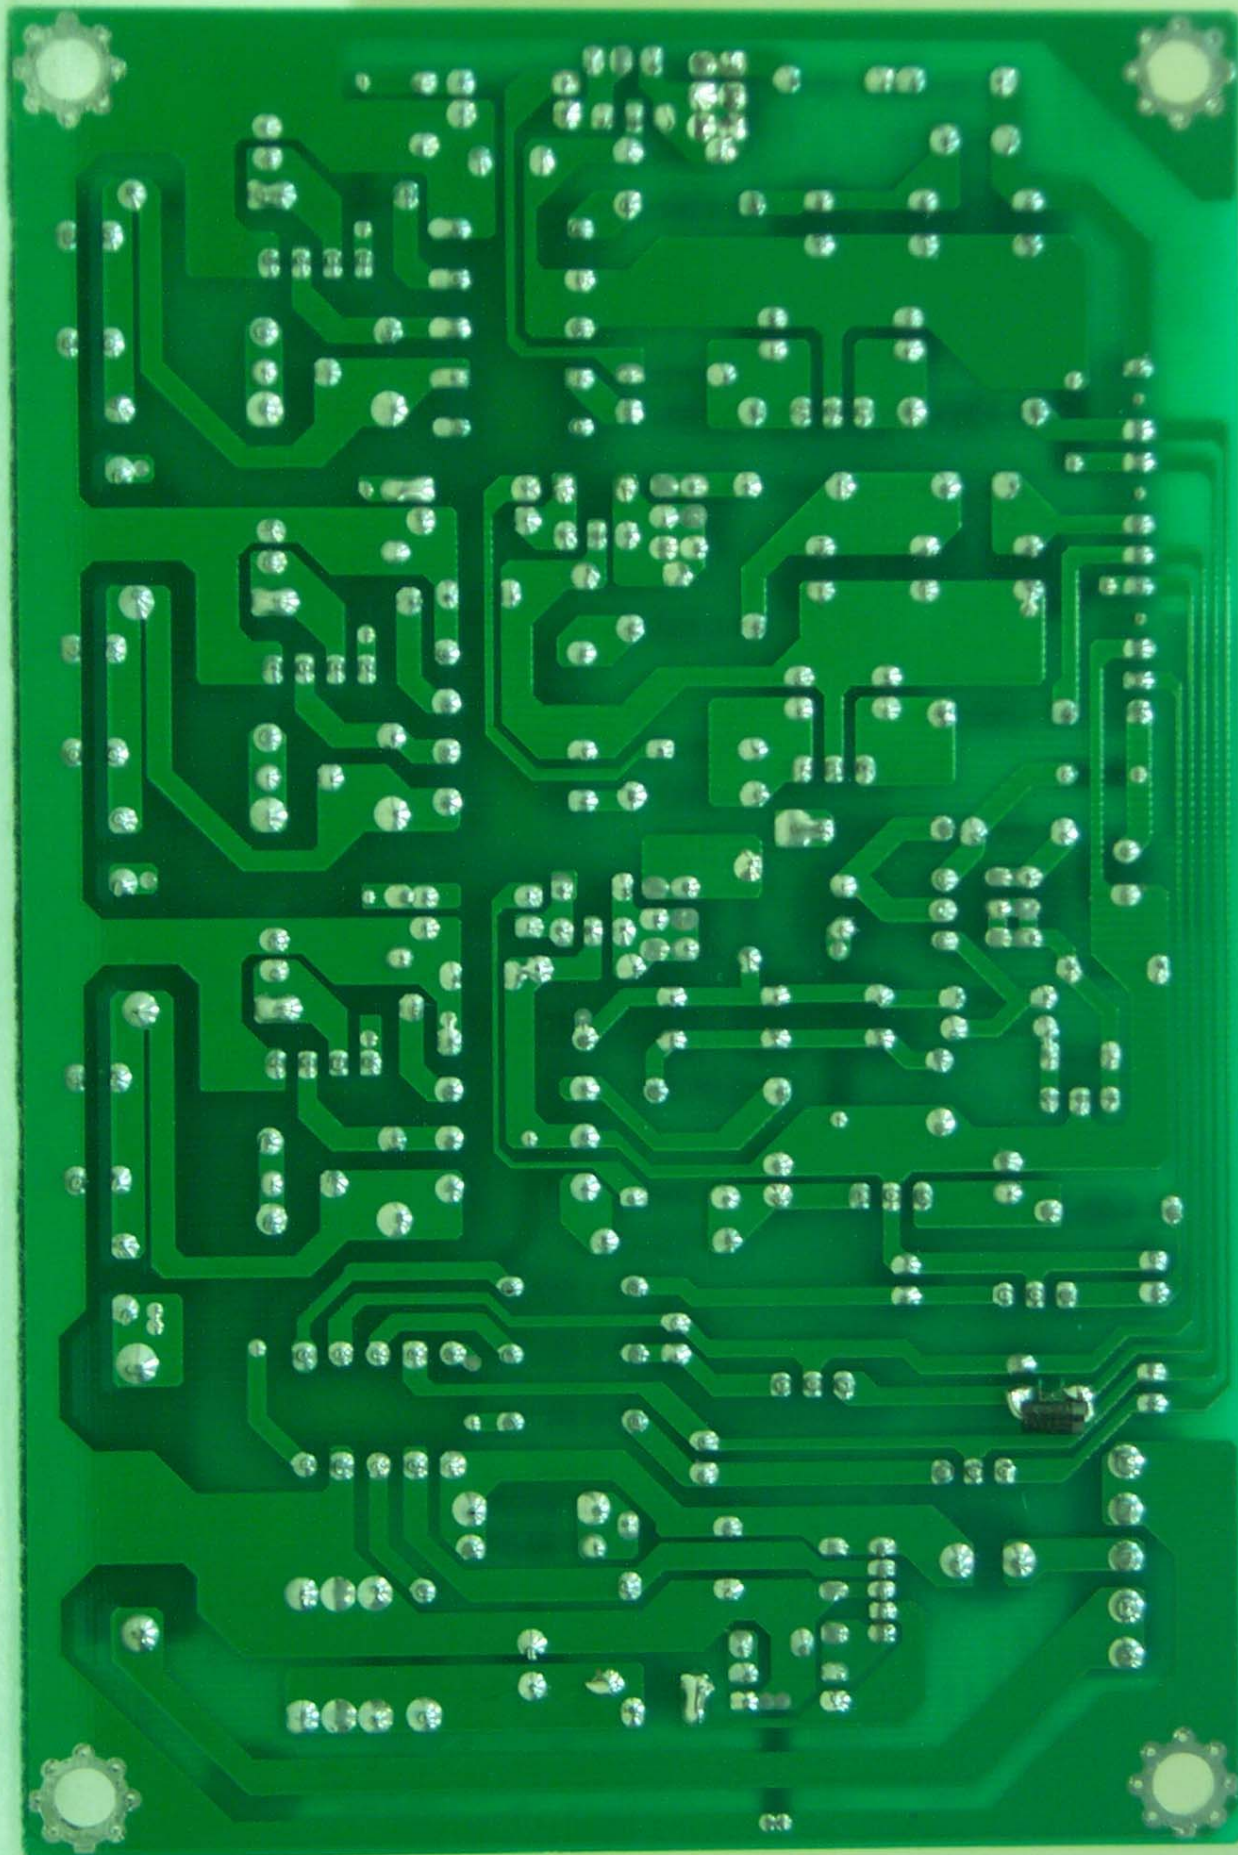

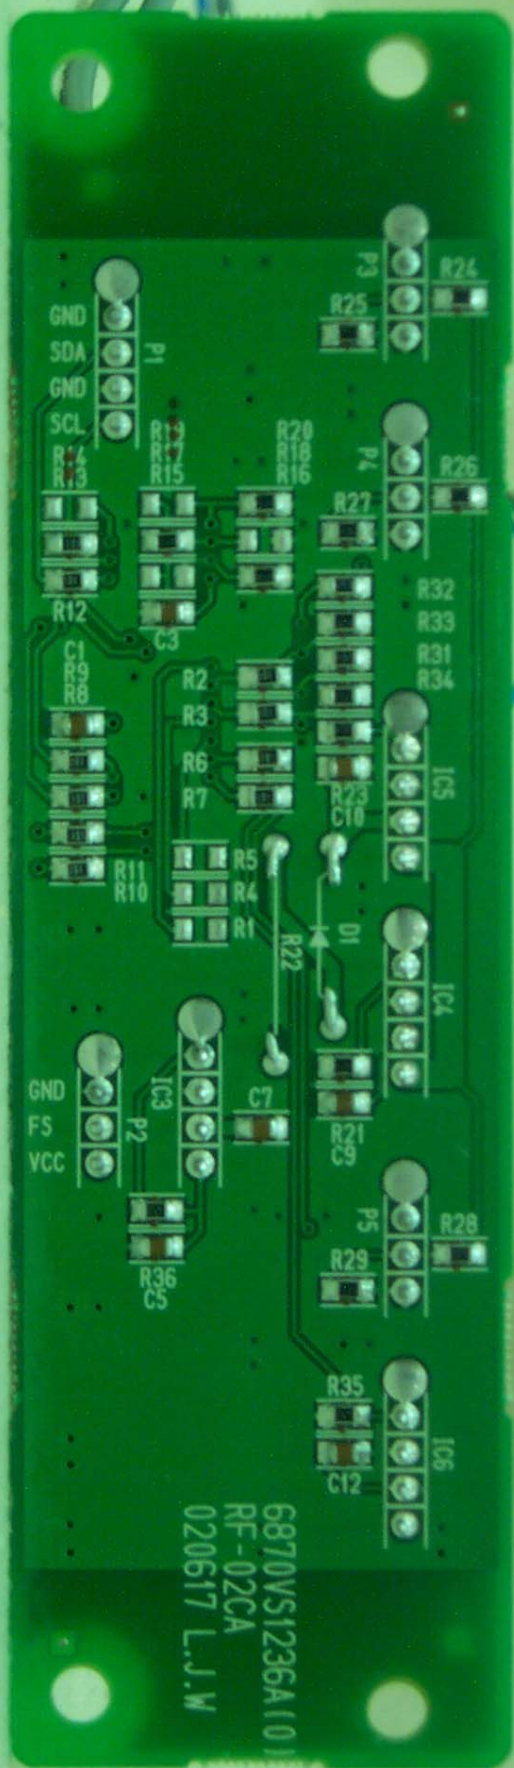

6870VS1236A(10)
RF-02CA
020617 L.J.W



P107C

P102B

P105C

02 33

P106C

6

RF02CA
FIX BOARD
K.M.K.



