

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	139
A.2.3 Emissions in Non-restricted Frequency Bands.....	154
A.3 26dB/6dB BANDWIDTH	155
A.3.1 26dB/6dB Bandwidth Result	155
A.3.2 Measurement Plots	160
A.4 MAXIMUM OUTPUT POWER	180
A.4.1 Average Output Power	180
A.4.2 Measurement Plots	187
A.5 CONDUCTED BAND EDGES	198
A.6 POWER SPECTRAL DENSITY	203
A.6.1 Power Spectral Density Result	203
A.6.2 Measurement Plots	207
A.7 FREQUENCY STABILITY	226
A.7.1 Frequency stability Result	226

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2019/10/01	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Tested SKU	SKU #1	Test Model	14Z90N

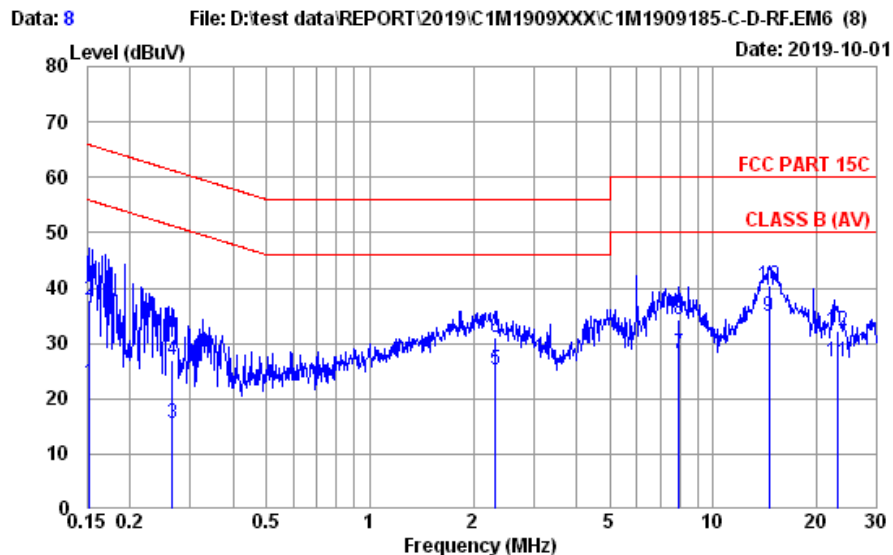

Site no. : No.8 Shielded Room Data no. : 8
Condition : ENV4200 100169 LISN Phase : NEUTRAL
Limit : FCC PART 15C
Env. / Ins. : 24°C / 57% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z90N
Power Rating : 120Vac/60Hz
Test Mode : Operating


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.70	0.04	9.86	2.22	22.82	55.87	33.05	Average
2	0.152	10.70	0.04	9.86	17.14	37.74	65.87	28.13	QP
3	0.266	10.57	0.04	9.86	-5.03	15.44	51.25	35.81	Average
4	0.266	10.57	0.04	9.86	6.36	26.83	61.25	34.42	QP
5	2.321	10.54	0.07	9.86	4.77	25.24	46.00	20.76	Average
6	2.321	10.54	0.07	9.86	10.54	31.01	56.00	24.99	QP
7	7.935	11.18	0.13	9.88	7.06	28.25	50.00	21.75	Average
8	7.935	11.18	0.13	9.88	13.16	34.35	60.00	25.65	QP
9	14.517	12.55	0.16	9.92	12.20	34.83	50.00	15.17	Average
10	14.517	12.55	0.16	9.92	17.68	40.31	60.00	19.69	QP
11	23.140	14.53	0.21	9.97	2.06	26.77	50.00	23.23	Average
12	23.140	14.53	0.21	9.97	7.67	32.38	60.00	27.62	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2019/10/01	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Tested SKU	SKU #1	Test Model	14Z90N

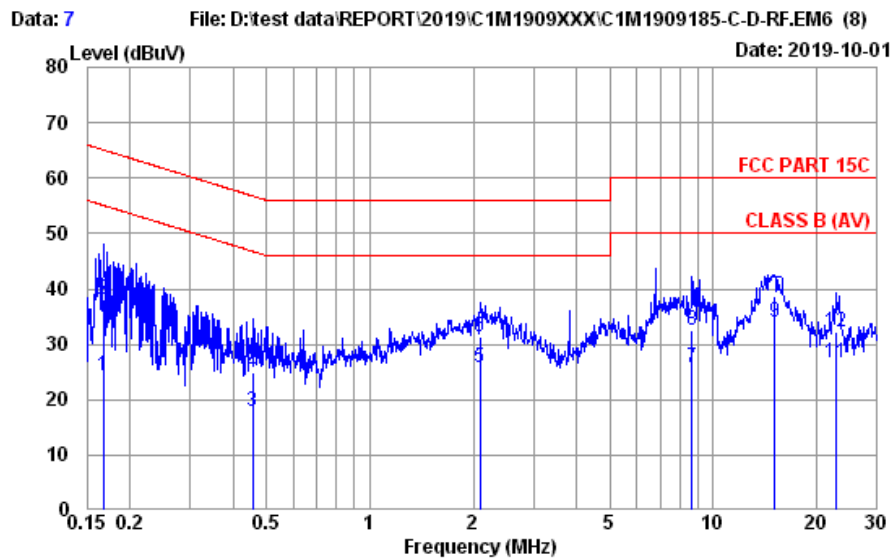

Site no. : No.8 Shielded Room Data no. : 7
Condition : ENV4200 100169 LISN Phase : LINE
Limit : FCC PART 15C
Env. / Ins. : 24°C / 57% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z90N
Power Rating : 120Vac/60Hz
Test Mode : Operating


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.168	10.59	0.04	9.86	3.78	24.27	55.08	30.81	Average
2	0.168	10.59	0.04	9.86	17.54	38.03	65.08	27.05	QP
3	0.456	10.45	0.04	9.86	-2.53	17.82	46.76	28.94	Average
4	0.456	10.45	0.04	9.86	4.54	24.89	56.76	31.87	QP
5	2.088	10.46	0.07	9.86	5.43	25.82	46.00	20.18	Average
6	2.088	10.46	0.07	9.86	10.84	31.23	56.00	24.77	QP
7	8.683	11.06	0.13	9.89	4.81	25.89	50.00	24.11	Average
8	8.683	11.06	0.13	9.89	11.57	32.65	60.00	27.35	QP
9	15.066	12.31	0.16	9.92	11.72	34.11	50.00	15.89	Average
10	15.066	12.31	0.16	9.92	16.26	38.65	60.00	21.35	QP
11	22.896	14.00	0.21	9.97	2.44	26.62	50.00	23.38	Average
12	22.896	14.00	0.21	9.97	8.06	32.24	60.00	27.76	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2019/10/01	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Tested SKU	SKU #2	Test Model	14Z90N

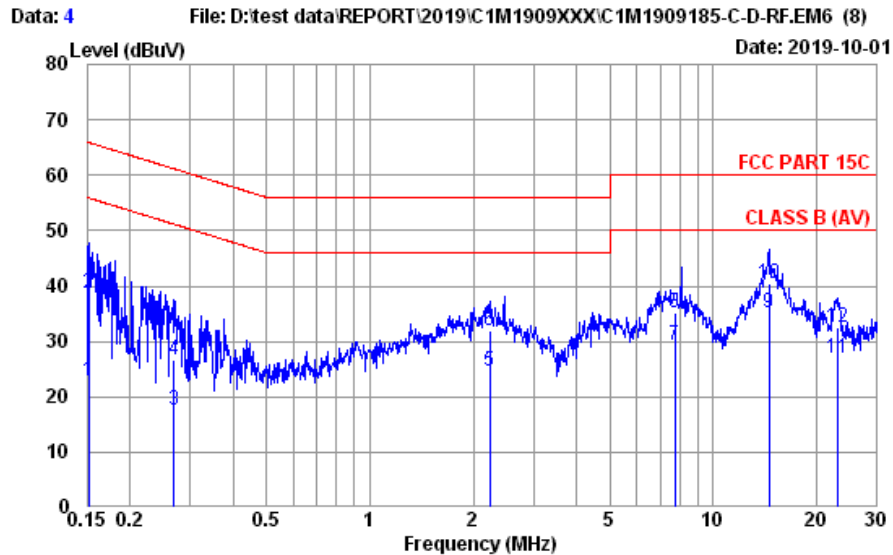

Site no. : No.8 Shielded Room Data no. : 4
Condition : ENV4200 100169 LISN Phase : NEUTRAL
Limit : FCC PART 15C
Env. / Ins. : 24°C / 57% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z90N
Power Rating : 120Vac/60Hz
Test Mode : Operating


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.70	0.04	9.86	2.24	22.84	55.91	33.07	Average
2	0.152	10.70	0.04	9.86	17.95	38.55	65.91	27.36	QP
3	0.269	10.56	0.04	9.86	-2.86	17.60	51.16	33.56	Average
4	0.269	10.56	0.04	9.86	6.21	26.67	61.16	34.49	QP
5	2.237	10.53	0.07	9.86	4.15	24.61	46.00	21.39	Average
6	2.237	10.53	0.07	9.86	11.41	31.87	56.00	24.13	QP
7	7.728	11.16	0.13	9.88	8.02	29.19	50.00	20.81	Average
8	7.728	11.16	0.13	9.88	13.96	35.13	60.00	24.87	QP
9	14.517	12.55	0.16	9.92	12.63	35.26	50.00	14.74	Average
10	14.517	12.55	0.16	9.92	17.84	40.47	60.00	19.53	QP
11	23.140	14.53	0.21	9.97	2.20	26.91	50.00	23.09	Average
12	23.140	14.53	0.21	9.97	7.86	32.57	60.00	27.43	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2019/10/01	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Tested SKU	SKU #2	Test Model	14Z90N

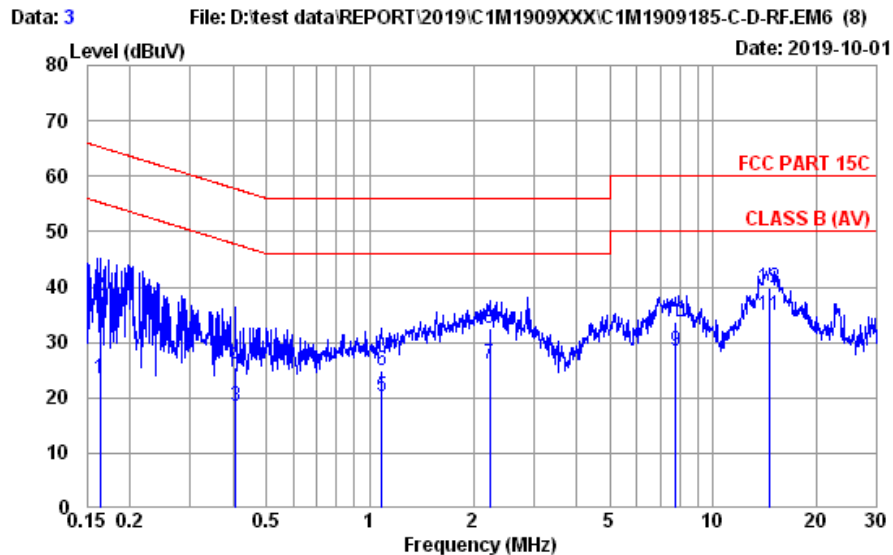

Site no. : No.8 Shielded Room Data no. : 3
Condition : ENV4200 100169 LISN Phase : LINE
Limit : FCC PART 15C
Env. / Ins. : 24°C / 57% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z90N
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.163	10.60	0.04	9.86	2.86	23.36	55.30	31.94	Average
2	0.163	10.60	0.04	9.86	17.81	38.31	65.30	26.99	QP
3	0.406	10.45	0.04	9.86	-1.87	18.48	47.73	29.25	Average
4	0.406	10.45	0.04	9.86	5.07	25.42	57.73	32.31	QP
5	1.082	10.42	0.05	9.86	-0.01	20.32	46.00	25.68	Average
6	1.082	10.42	0.05	9.86	4.54	24.87	56.00	31.13	QP
7	2.237	10.47	0.07	9.86	5.70	26.10	46.00	19.90	Average
8	2.237	10.47	0.07	9.86	12.27	32.67	56.00	23.33	QP
9	7.769	10.98	0.13	9.88	7.52	28.51	50.00	21.49	Average
10	7.769	10.98	0.13	9.88	12.63	33.62	60.00	26.38	QP
11	14.594	12.22	0.16	9.92	12.46	34.76	50.00	15.24	Average
12	14.594	12.22	0.16	9.92	17.64	39.94	60.00	20.06	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2019/09/23~10/2	Temp./Hum.	23~26°C/49~54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
		Test Model	14Z90N

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

Test SKU: SKU #1

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
61.04	12.47	1.75	20.34	34.56	40.00	5.44	Peak
148.34	17.10	2.87	16.81	36.78	43.50	6.72	Peak
312.27	20.07	4.61	11.61	36.29	46.00	9.71	Peak
593.57	24.70	6.87	8.45	40.02	46.00	5.98	Peak
742.95	25.91	7.59	9.04	42.54	46.00	3.46	Peak
841.89	26.85	8.13	5.72	40.70	46.00	5.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
79.47	13.44	2.03	22.37	37.84	40.00	2.16	Peak
169.68	15.95	3.11	22.08	41.14	43.50	2.36	Peak
241.46	18.42	3.85	19.81	42.08	46.00	3.92	Peak
508.21	23.80	6.76	13.62	44.18	46.00	1.82	Peak
847.71	26.90	8.16	5.89	40.95	46.00	5.05	Peak
932.10	27.56	8.64	5.54	41.74	46.00	4.26	Peak

Test SKU: SKU #2

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
61.04	12.47	1.75	19.92	34.14	40.00	5.86	Peak
148.34	17.10	2.87	16.62	36.59	43.50	6.91	Peak
593.57	24.70	6.87	8.57	40.14	46.00	5.86	Peak
697.36	25.42	7.35	9.87	42.64	46.00	3.36	Peak
742.95	25.91	7.59	8.42	41.92	46.00	4.08	Peak
793.39	26.43	7.86	6.83	41.12	46.00	4.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
80.44	13.55	2.04	22.72	38.31	40.00	1.69	Peak
160.95	16.44	3.02	17.84	37.30	43.50	6.20	Peak
244.37	18.54	3.88	22.09	44.51	46.00	1.49	Peak
677.96	25.30	7.25	7.59	40.14	46.00	5.86	Peak
847.71	26.90	8.16	7.32	42.38	46.00	3.62	Peak
932.10	27.56	8.64	5.73	41.93	46.00	4.07	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Test SKU: SKU #1

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

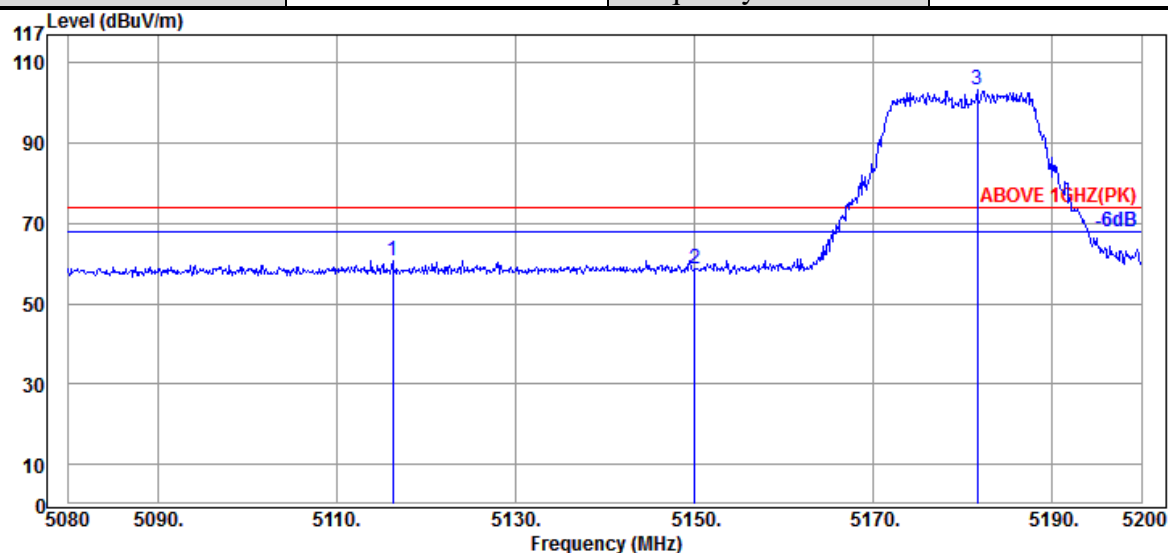

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.24	34.57	10.58	15.68	60.83	74.00	13.17	Peak
5150.00	34.70	10.61	13.44	58.75	74.00	15.25	Peak
@ 5181.64	34.57	10.63	58.13	103.33	---	---	Peak

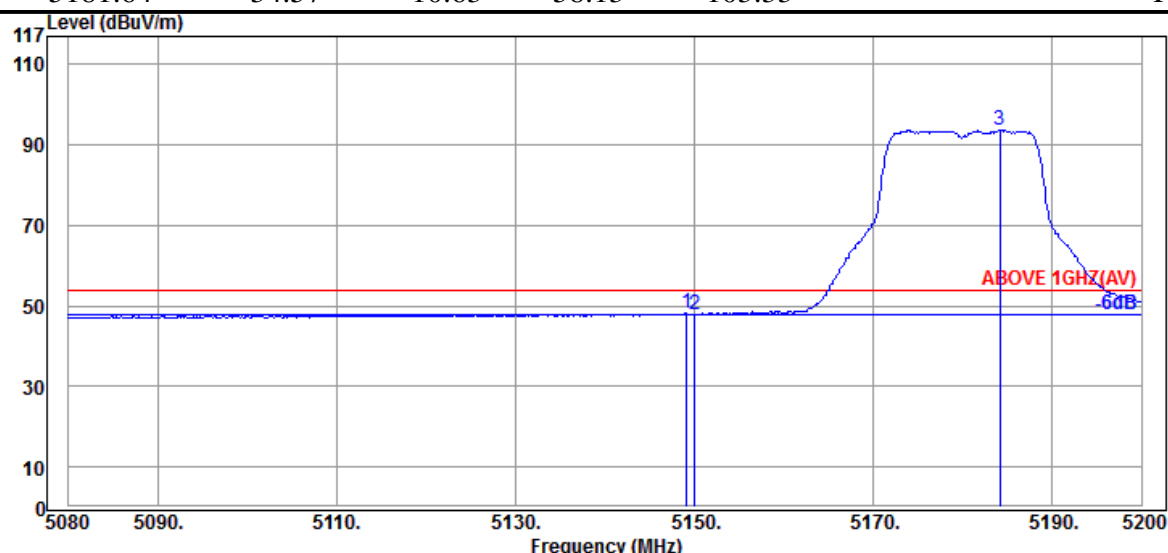

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.12	34.70	10.61	2.85	48.16	54.00	5.84	Average
5150.00	34.70	10.61	2.68	47.99	54.00	6.01	Average
@ 5184.16	34.57	10.63	48.47	93.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

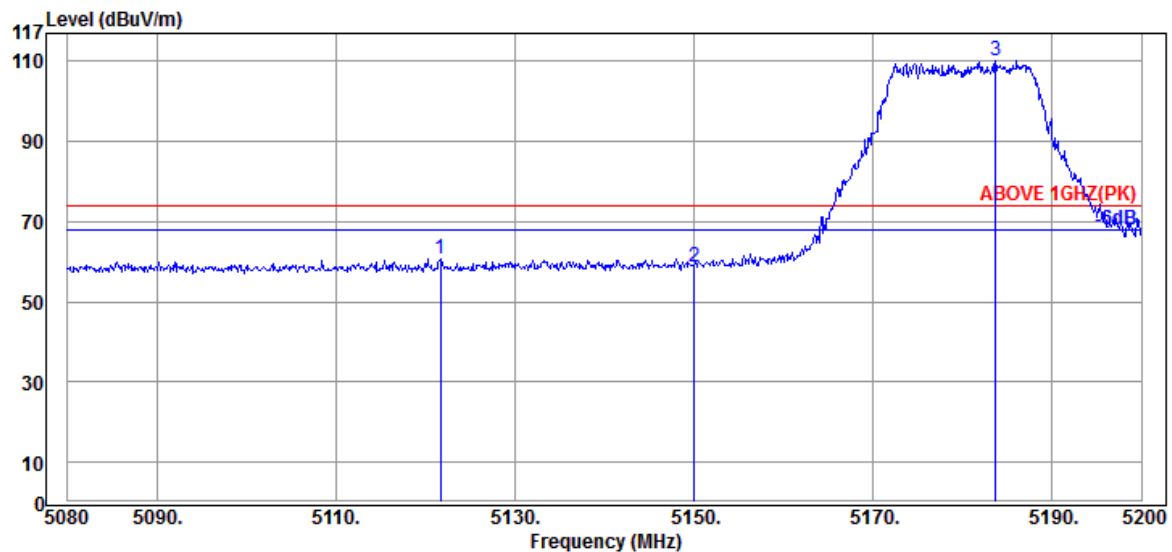

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.64	34.57	10.58	15.54	60.69	74.00	13.31	Peak
5150.00	34.70	10.61	13.30	58.61	74.00	15.39	Peak
@ 5183.68	34.57	10.63	65.00	110.20	---	---	Peak

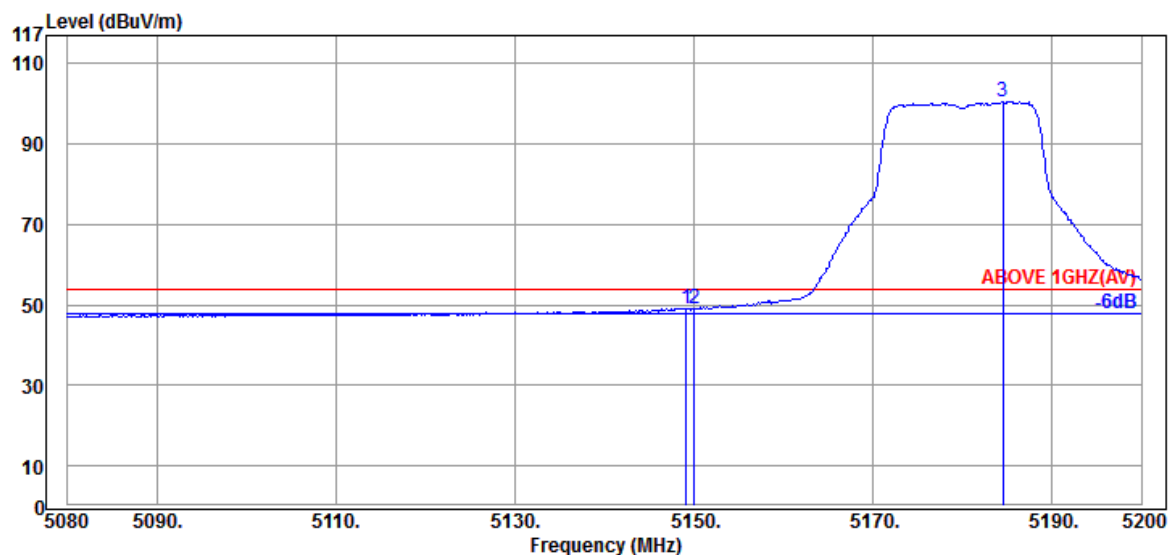

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.12	34.70	10.61	3.85	49.16	54.00	4.84	Average
5150.00	34.70	10.61	3.57	48.88	54.00	5.12	Average
@ 5184.52	34.57	10.63	55.40	100.60	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

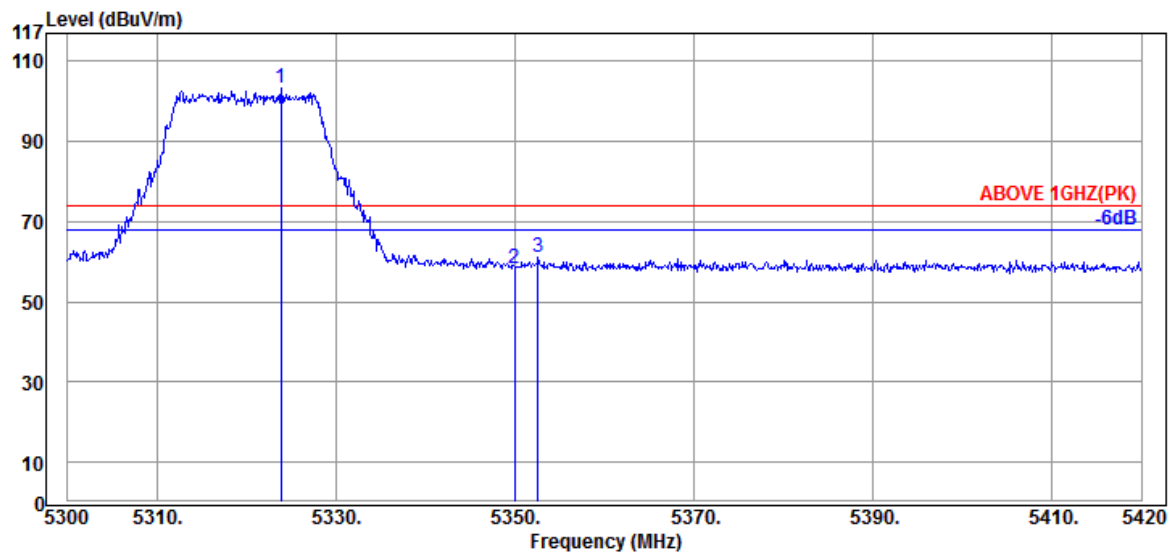

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.88	34.67	10.74	57.99	103.40	---	---	Peak
5350.00	34.80	10.76	12.63	58.19	74.00	15.81	Peak
5352.56	34.80	10.76	15.44	61.00	74.00	13.00	Peak

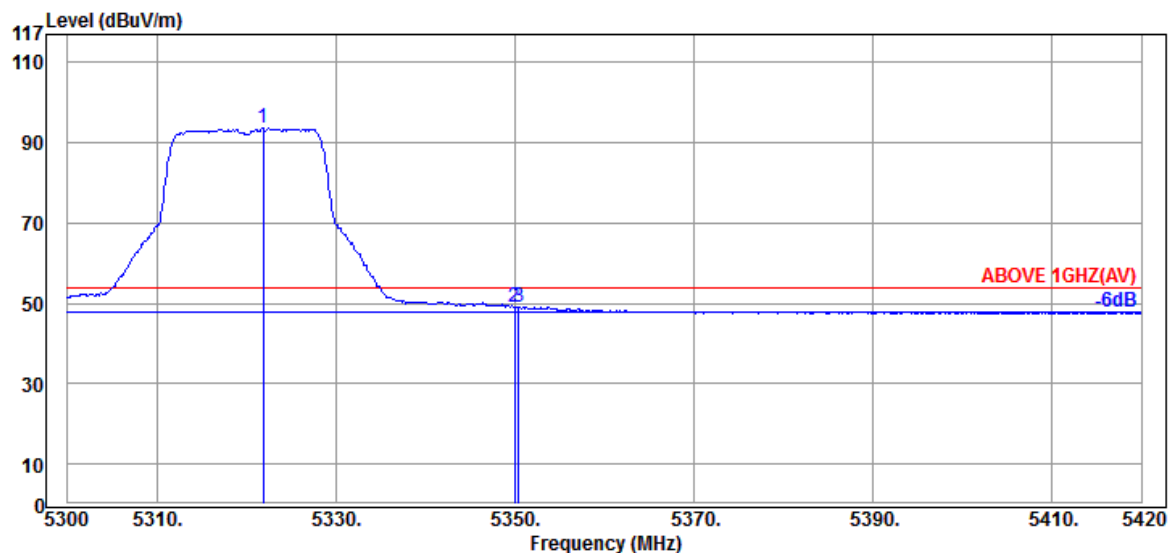

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.84	34.67	10.74	48.13	93.54	---	---	Average
5350.00	34.80	10.76	3.63	49.19	54.00	4.81	Average
5350.40	34.80	10.76	3.43	48.99	54.00	5.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

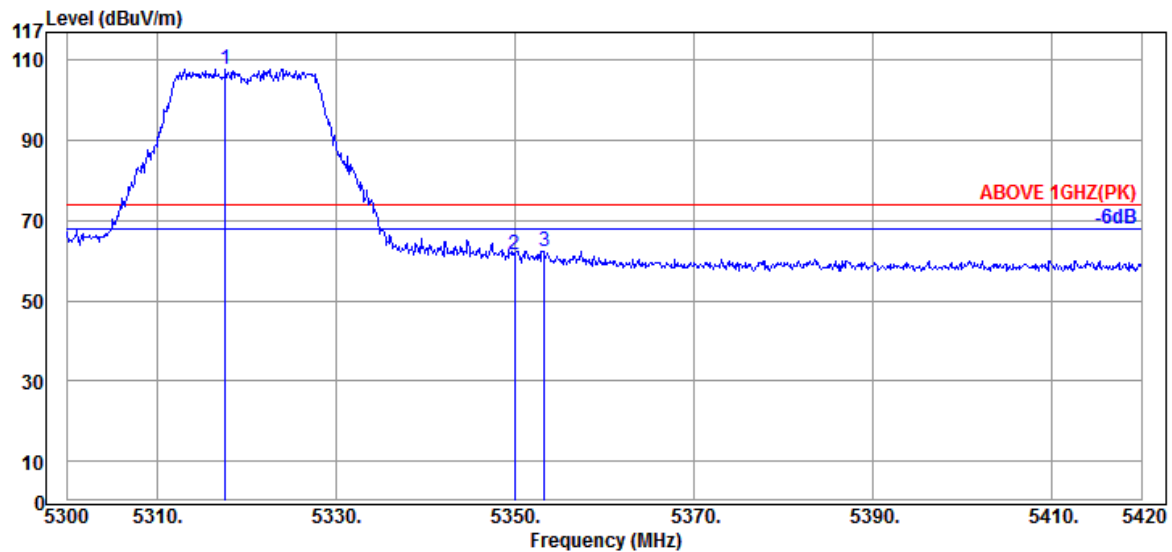

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.64	34.67	10.74	62.40	107.81	---	---	Peak
5350.00	34.80	10.76	15.94	61.50	74.00	12.50	Peak
5353.28	34.80	10.76	16.88	62.44	74.00	11.56	Peak

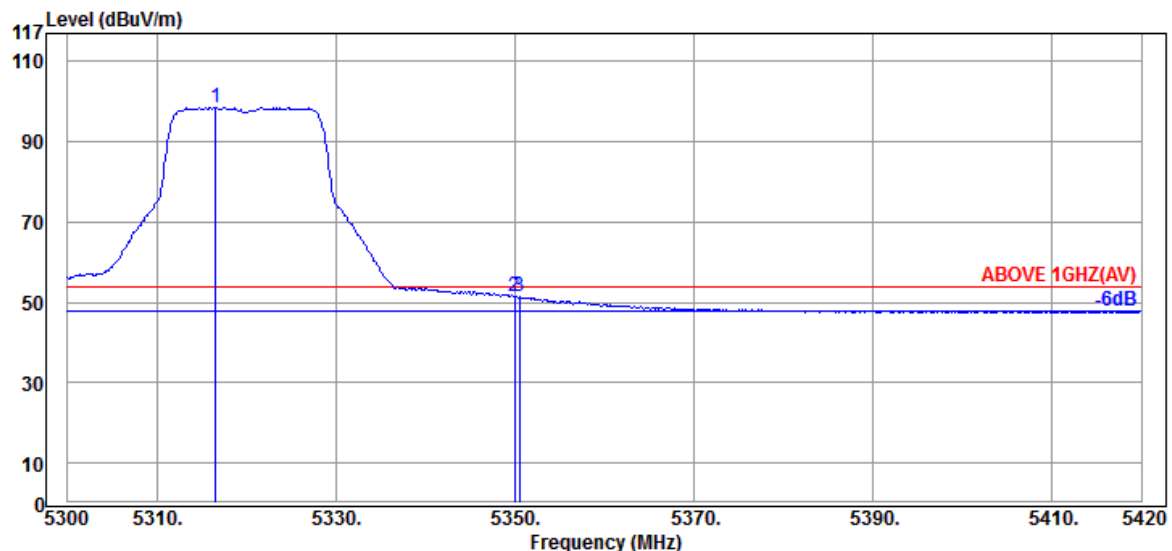

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.56	34.67	10.74	53.15	98.56	---	---	Average
5350.00	34.80	10.76	5.84	51.40	54.00	2.60	Average
5350.52	34.80	10.76	5.74	51.30	54.00	2.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

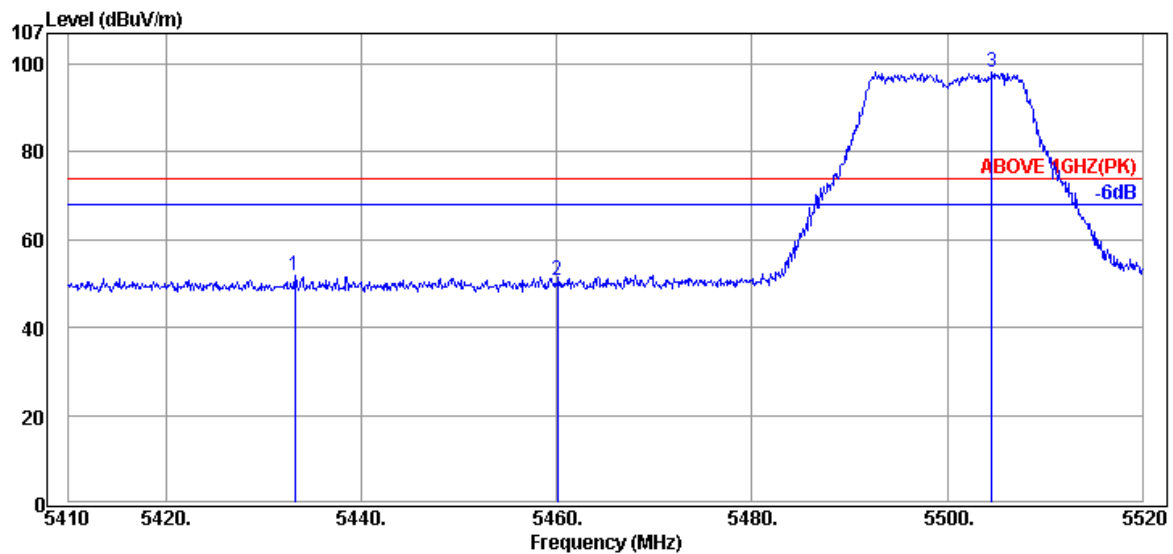

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.21	34.77	10.83	6.15	51.75	74.00	22.25	Peak
5460.05	34.70	10.84	5.22	50.76	74.00	23.24	Peak
@ 5504.60	34.60	10.88	52.73	98.21	---	---	Peak

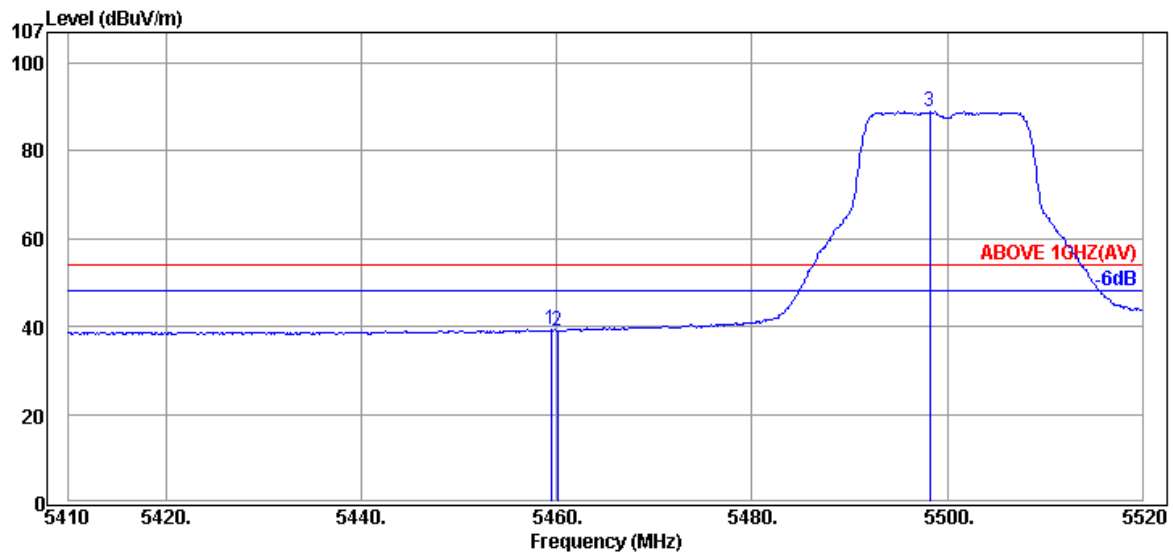

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.39	34.70	10.84	-6.25	39.29	54.00	14.71	Average
5460.05	34.70	10.84	-6.43	39.11	54.00	14.89	Average
@ 5498.22	34.60	10.88	43.45	88.93	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

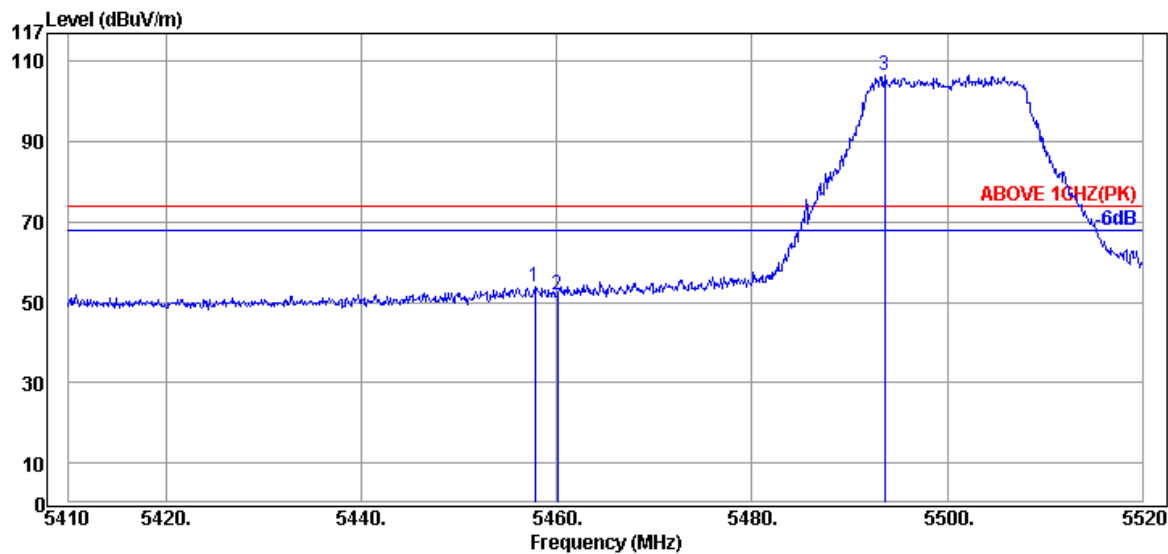

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.74	34.70	10.84	8.20	53.74	74.00	20.26	Peak
5460.05	34.70	10.84	6.14	51.68	74.00	22.32	Peak
@ 5493.60	34.63	10.87	61.20	106.70	---	---	Peak

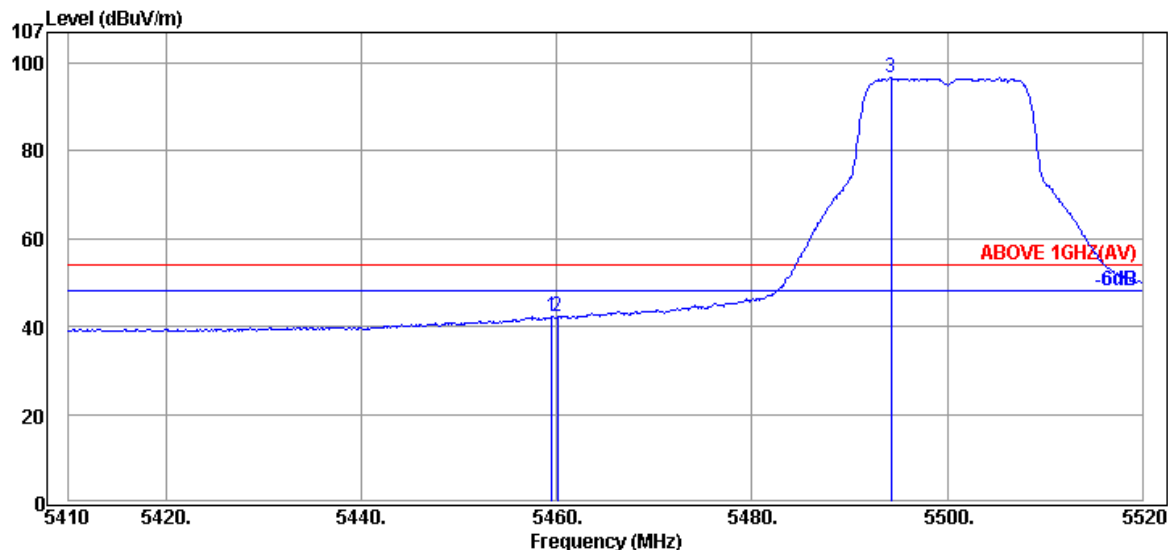

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.50	34.70	10.84	-3.28	42.26	54.00	11.74	Average
5460.05	34.70	10.84	-3.41	42.13	54.00	11.87	Average
@ 5494.26	34.63	10.87	51.09	96.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

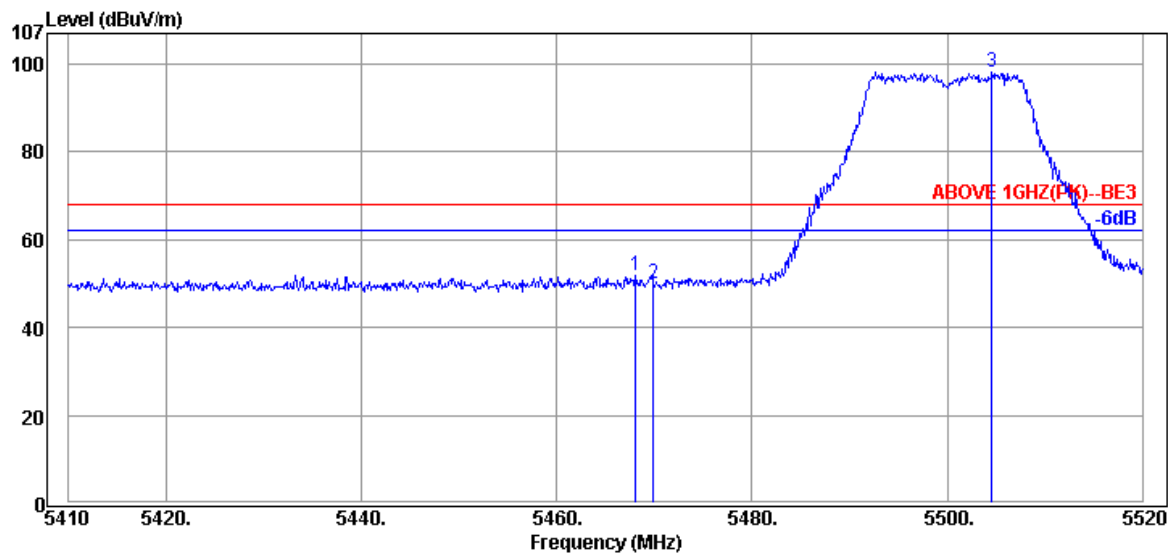

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.08	34.67	10.85	6.28	51.80	68.20	16.40	Peak
5469.95	34.67	10.85	4.50	50.02	68.20	18.18	Peak
@ 5504.60	34.60	10.88	52.73	98.21	---	---	Peak

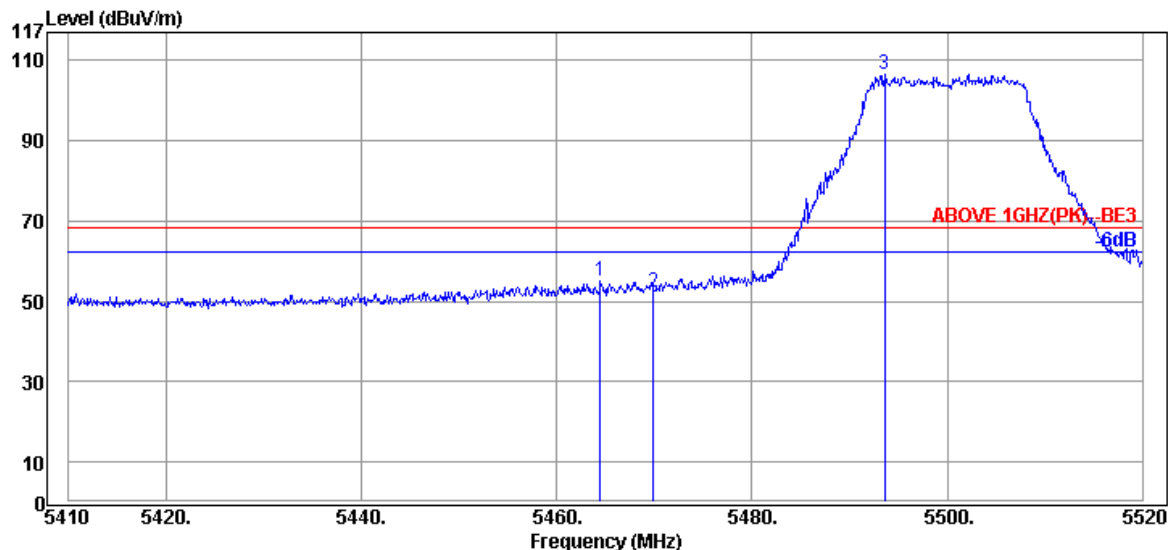

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.45	34.67	10.85	9.46	54.98	68.20	13.22	Peak
5469.95	34.67	10.85	6.89	52.41	68.20	15.79	Peak
@ 5493.60	34.63	10.87	61.20	106.70	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

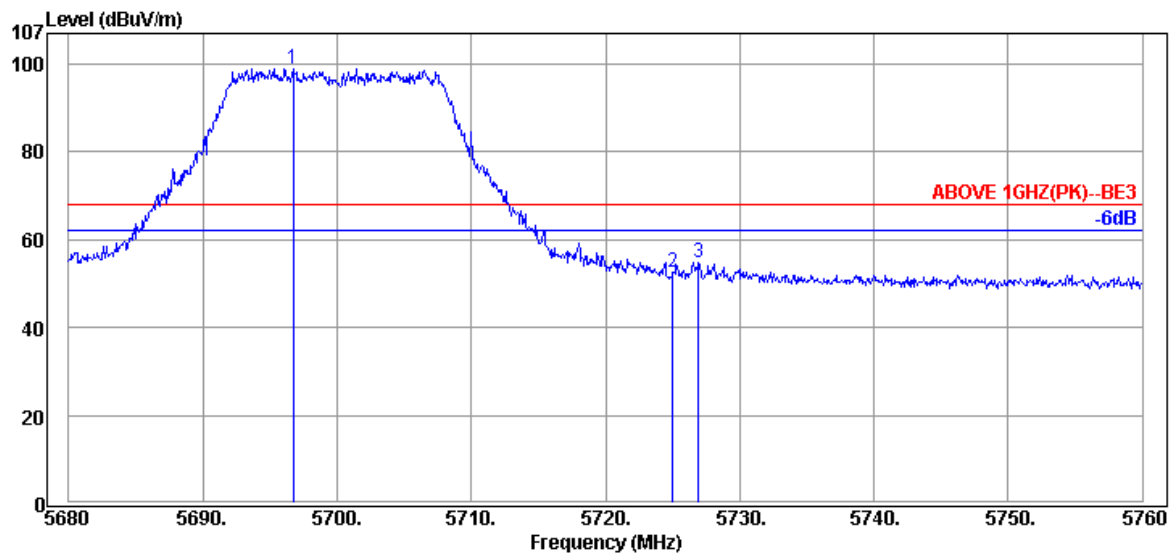

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5696.72	34.90	10.90	53.13	98.93	---	---	Peak
	5725.00	34.83	10.91	6.70	52.44	68.20	15.76	Peak
	5726.96	34.83	10.91	8.98	54.72	68.20	13.48	Peak

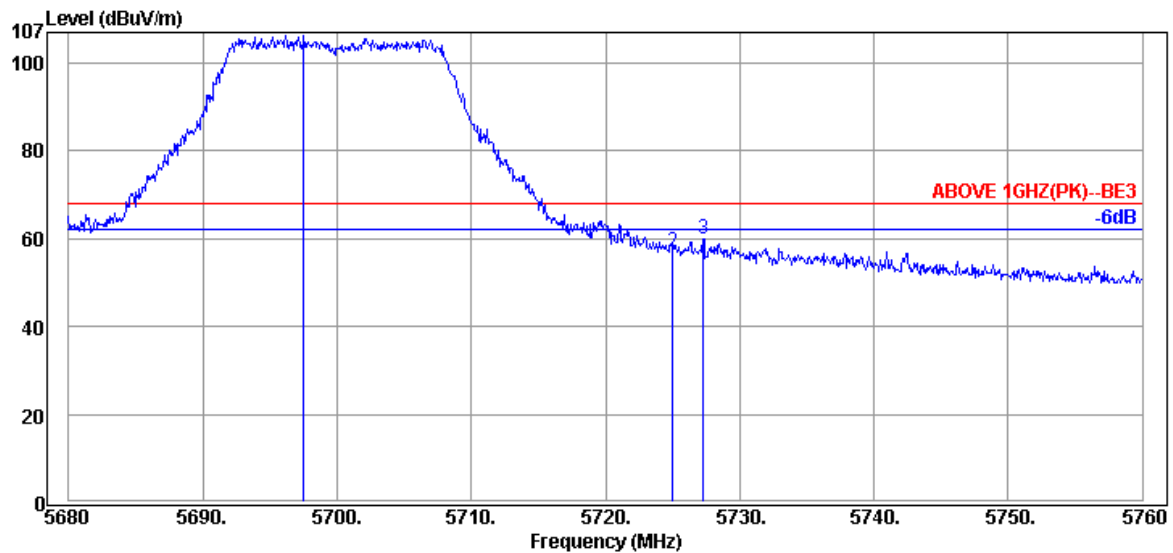

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5697.52	34.90	10.90	60.41	106.21	---	---	Peak
	5725.00	34.83	10.91	11.32	57.06	68.20	11.14	Peak
	5727.28	34.83	10.91	14.32	60.06	68.20	8.14	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5720MHz

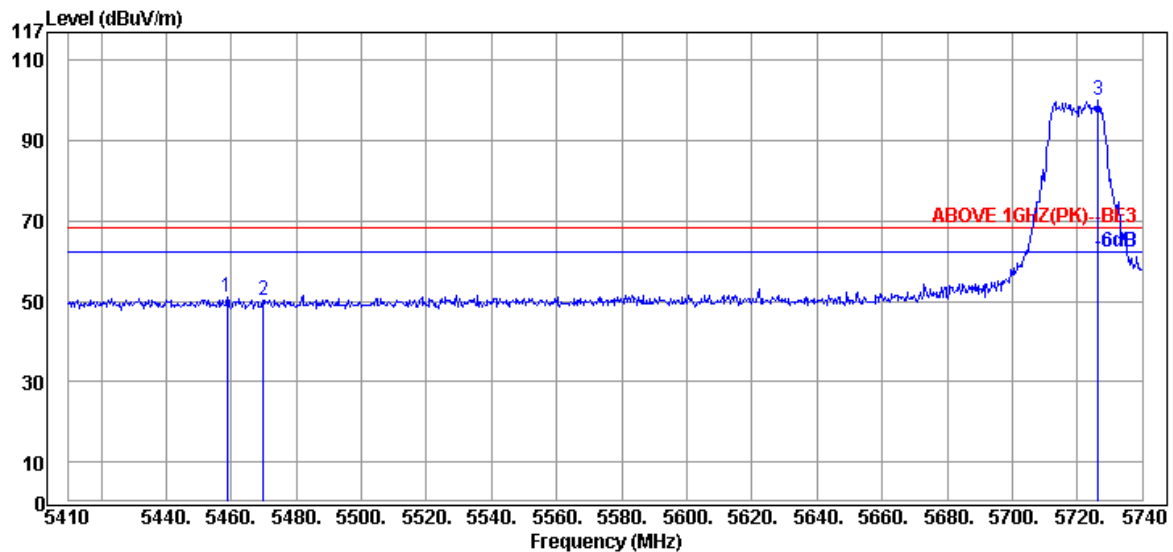

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.84	34.68	10.85	5.35	50.88	68.20	17.32	Peak
5470.00	34.66	10.86	4.60	50.12	68.20	18.08	Peak
@ 5726.47	34.85	10.91	54.36	100.12	---	---	Peak

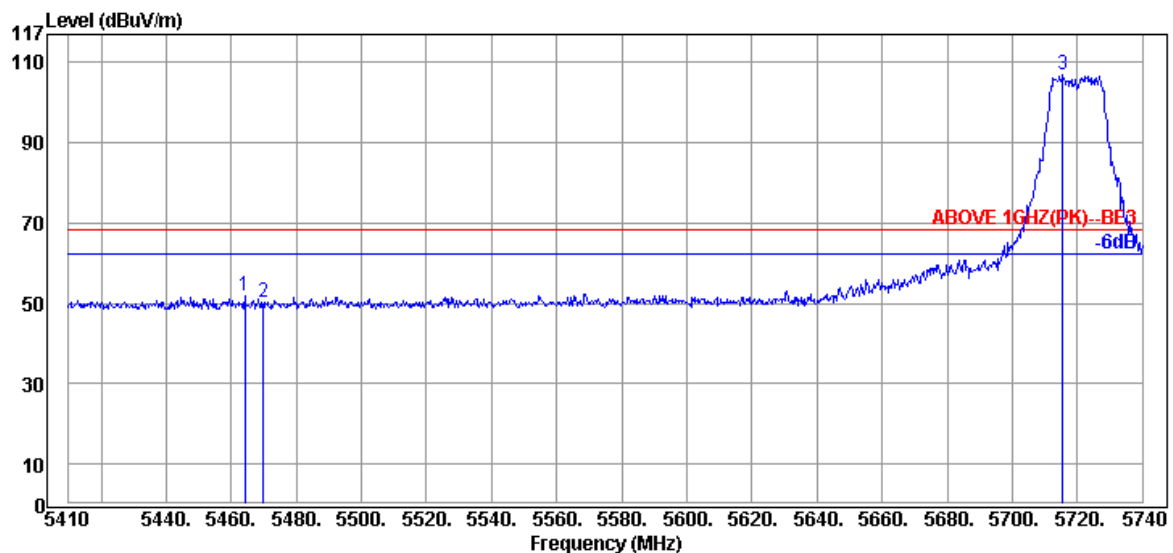

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.12	34.67	10.85	6.31	51.83	68.20	16.37	Peak
5470.00	34.66	10.86	4.88	50.40	68.20	17.80	Peak
@ 5715.58	34.87	10.91	61.09	106.87	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5720MHz

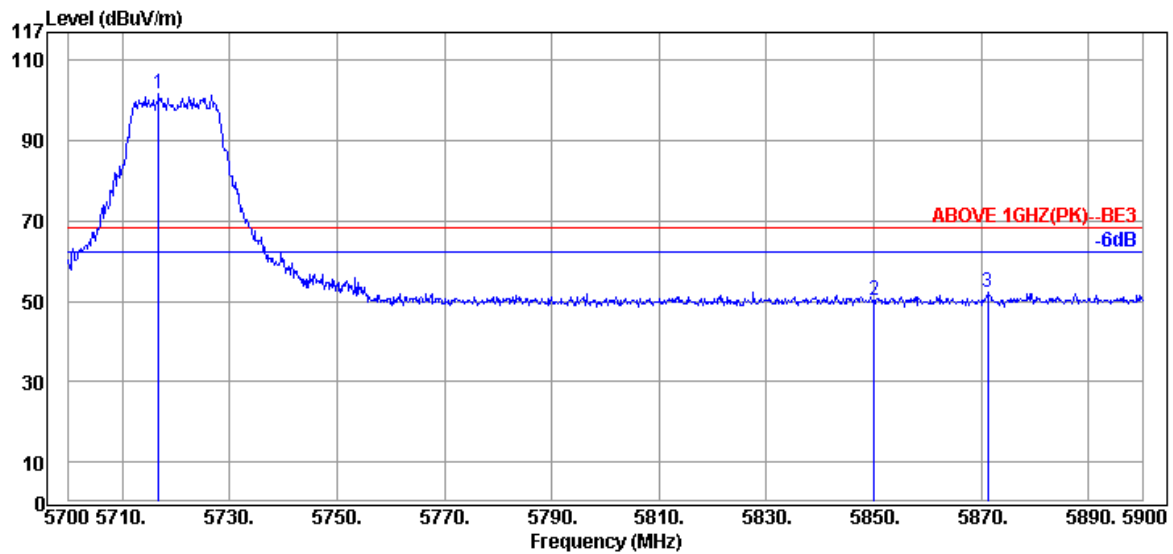

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.80	34.87	10.90	55.81	101.58	---	---	Peak
5850.00	35.50	10.92	3.77	50.19	68.20	18.01	Peak
5871.20	35.57	10.93	5.74	52.24	68.20	15.96	Peak

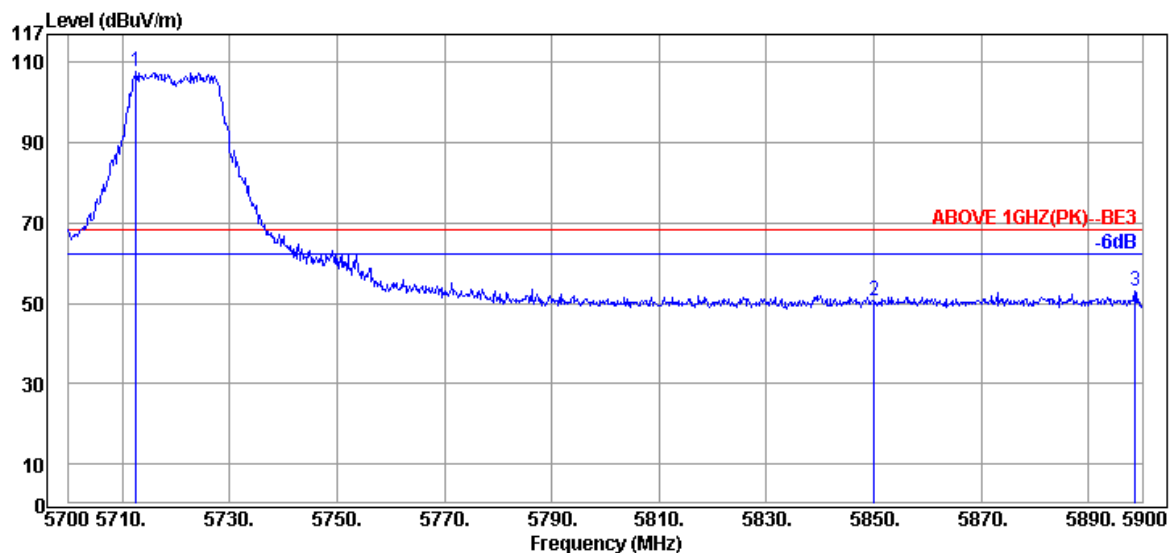

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.60	34.87	10.90	62.02	107.79	---	---	Peak
5850.00	35.50	10.92	4.19	50.61	68.20	17.59	Peak
5898.60	35.60	10.93	6.40	52.93	68.20	15.27	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

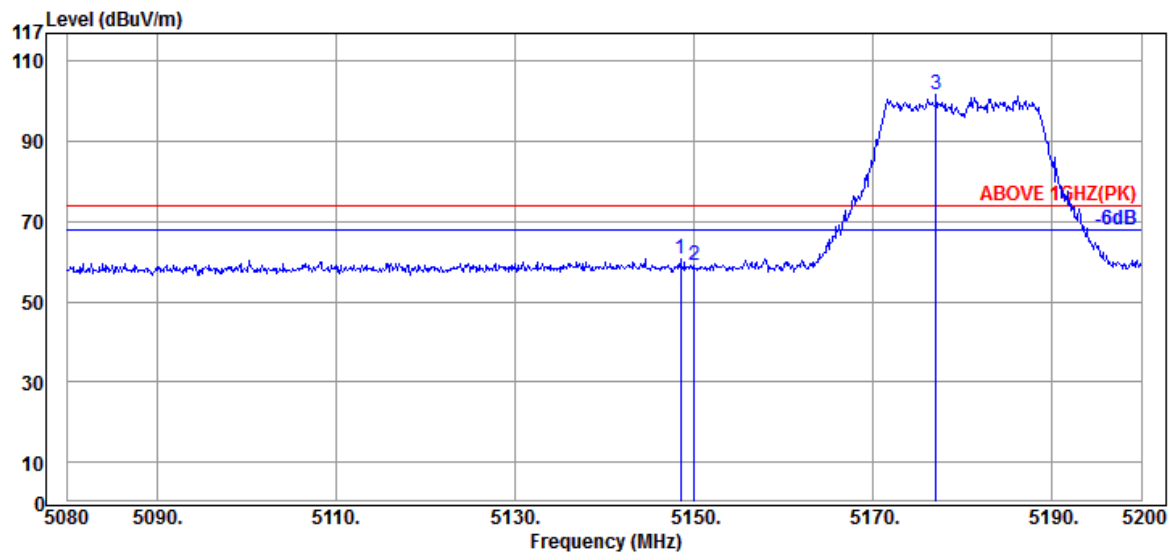

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.52	34.70	10.61	15.52	60.83	74.00	13.17	Peak
5150.00	34.70	10.61	13.63	58.94	74.00	15.06	Peak
@ 5177.08	34.57	10.63	56.33	101.53	---	---	Peak

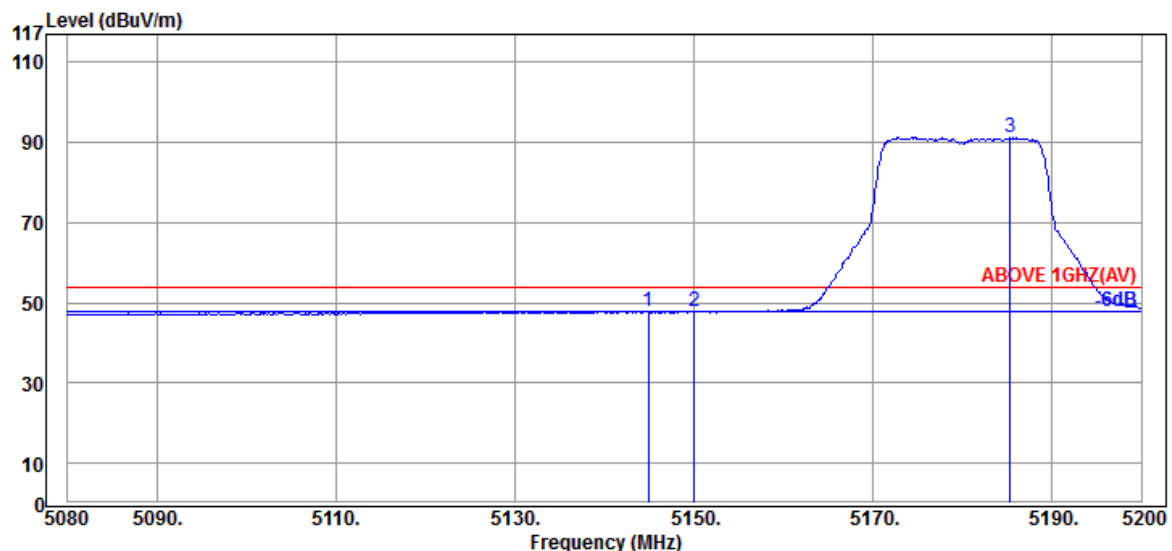

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.92	34.70	10.61	2.65	47.96	54.00	6.04	Average
5150.00	34.70	10.61	2.47	47.78	54.00	6.22	Average
@ 5185.36	34.57	10.63	45.98	91.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

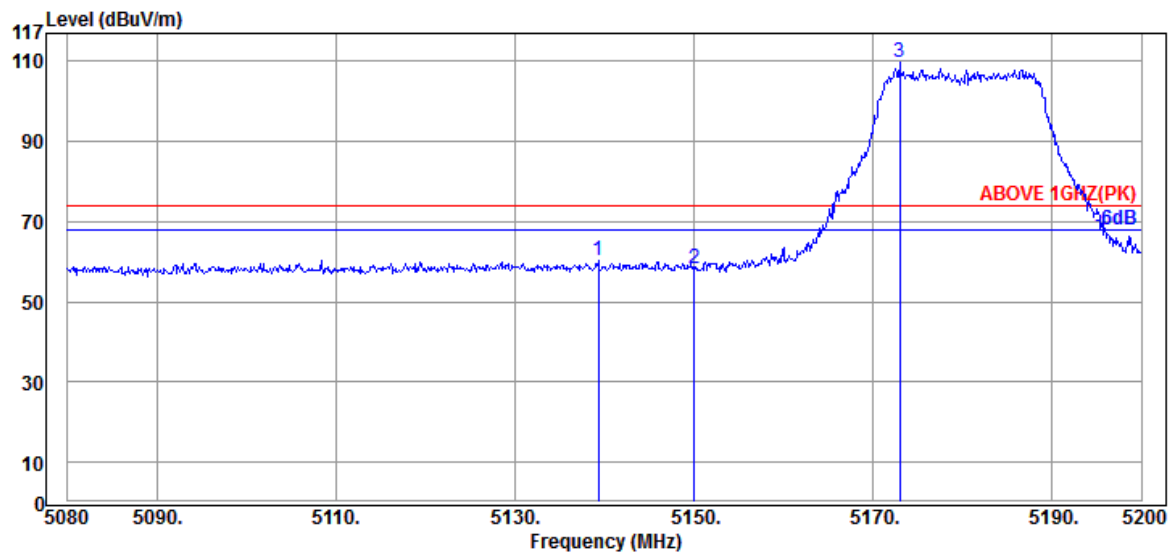

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.28	34.63	10.59	15.07	60.29	74.00	13.71	Peak
5150.00	34.70	10.61	12.86	58.17	74.00	15.83	Peak
@ 5173.00	34.63	10.62	64.48	109.73	---	---	Peak

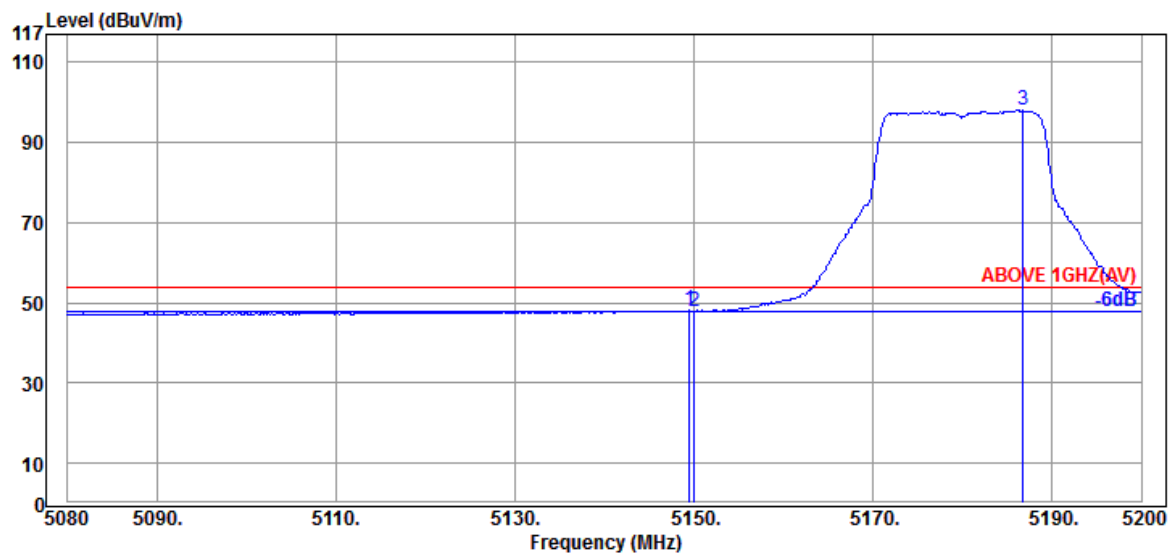

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.48	34.70	10.61	2.77	48.08	54.00	5.92	Average
5150.00	34.70	10.61	2.51	47.82	54.00	6.18	Average
@ 5186.80	34.57	10.63	53.00	98.20	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

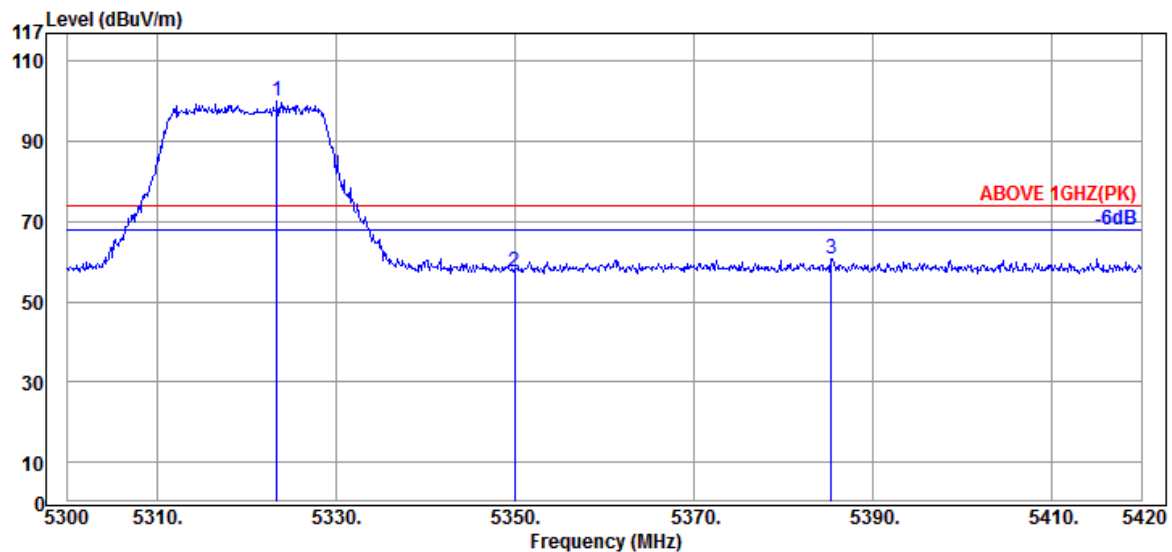

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.40	34.67	10.74	54.54	99.95	---	---	Peak
5350.00	34.80	10.76	11.91	57.47	74.00	16.53	Peak
5385.32	34.87	10.79	15.16	60.82	74.00	13.18	Peak

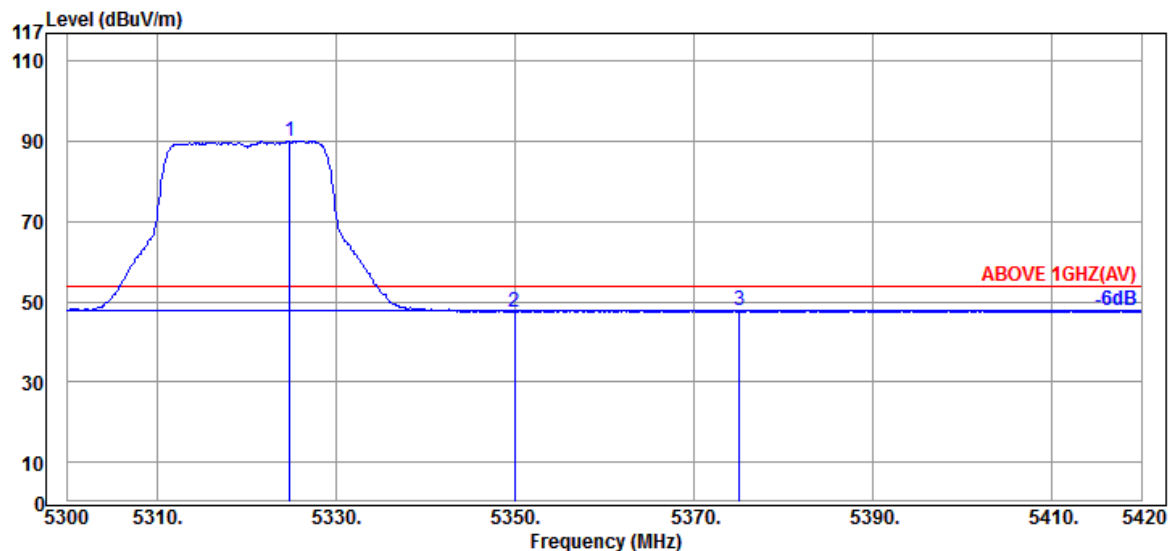

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.84	34.67	10.74	44.68	90.09	---	---	Average
5350.00	34.80	10.76	2.06	47.62	54.00	6.38	Average
5375.12	34.83	10.78	2.28	47.89	54.00	6.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

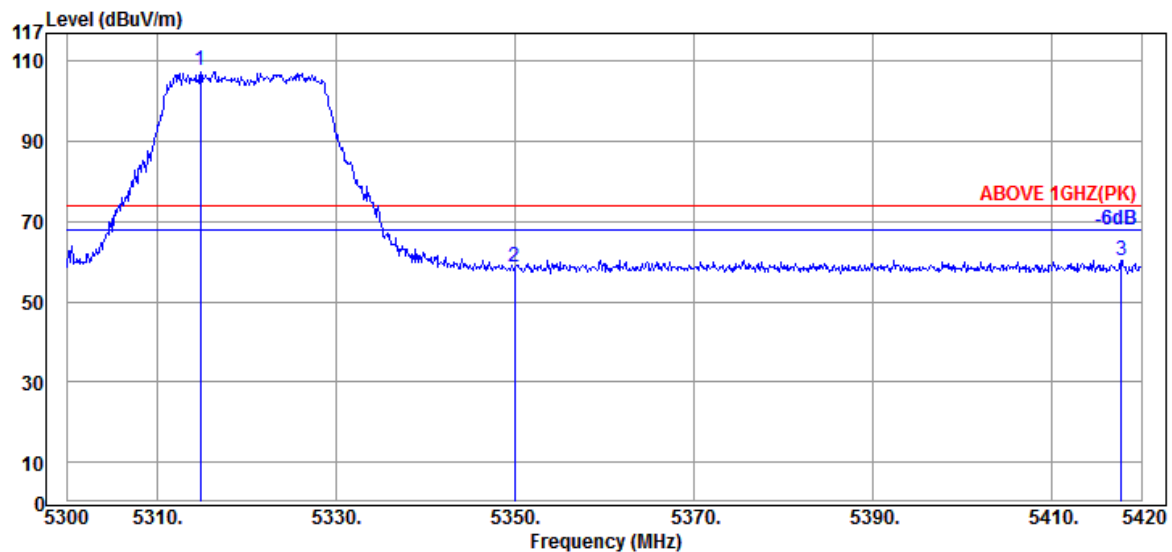

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.88	34.67	10.74	62.14	107.55	---	---	Peak
5350.00	34.80	10.76	12.98	58.54	74.00	15.46	Peak
5417.72	34.83	10.82	14.77	60.42	74.00	13.58	Peak

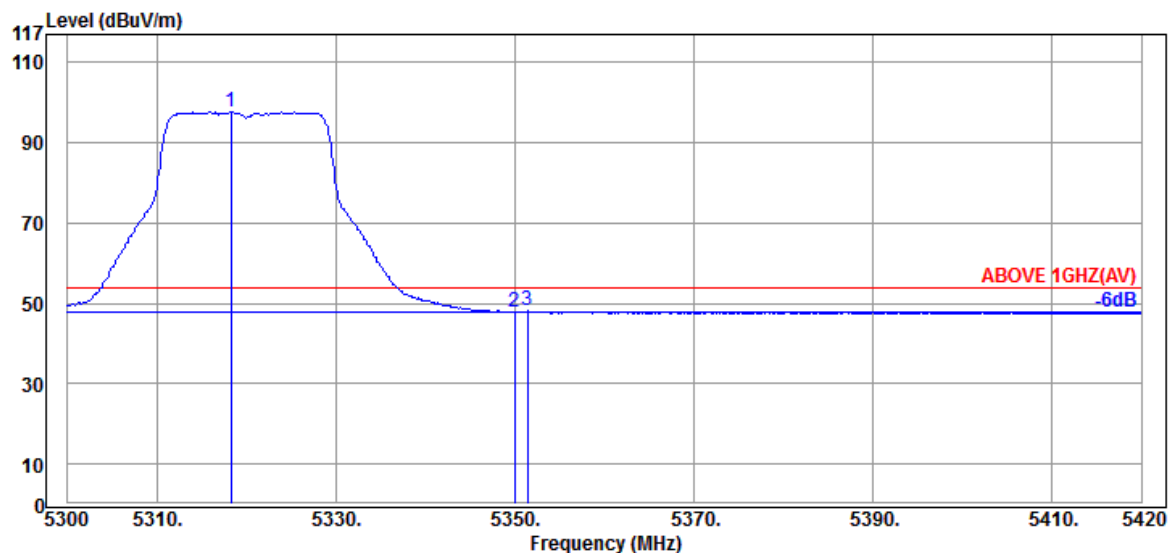

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.24	34.67	10.74	52.19	97.60	---	---	Average
5350.00	34.80	10.76	2.43	47.99	54.00	6.01	Average
5351.36	34.80	10.76	2.54	48.10	54.00	5.90	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

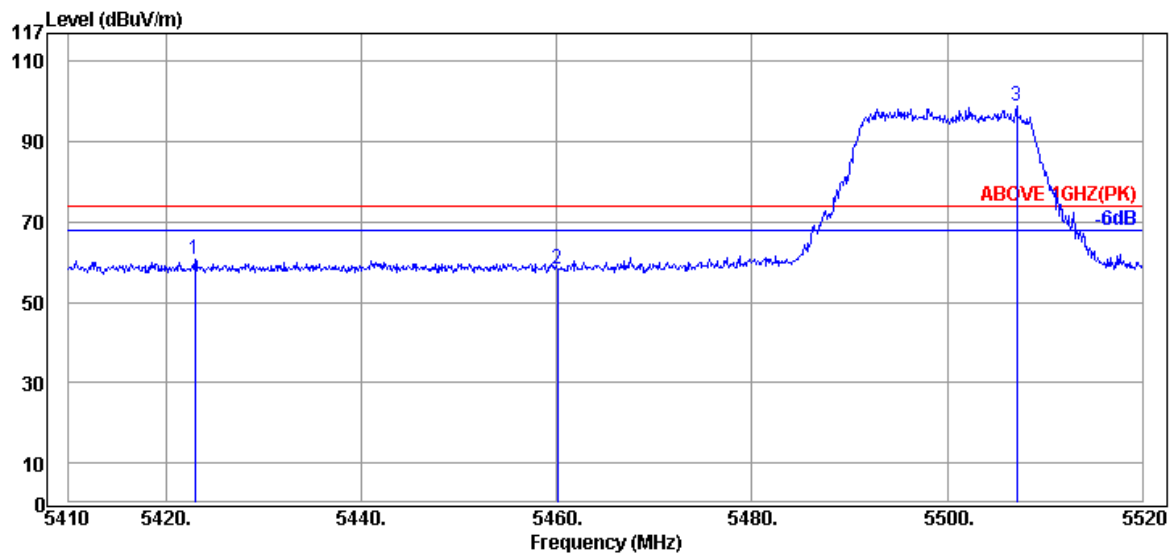

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.98	34.83	10.82	14.89	60.54	74.00	13.46	Peak
5460.05	34.70	10.84	12.90	58.44	74.00	15.56	Peak
@ 5507.13	34.60	10.88	53.37	98.85	---	---	Peak

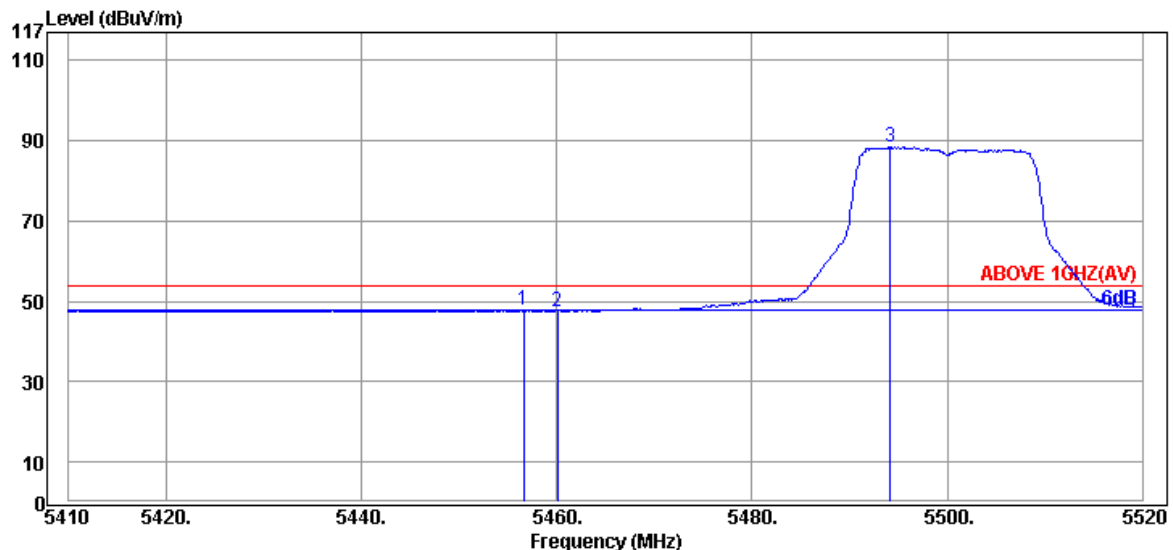

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.64	34.70	10.84	2.25	47.79	54.00	6.21	Average
5460.05	34.70	10.84	2.05	47.59	54.00	6.41	Average
@ 5494.15	34.63	10.87	43.07	88.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

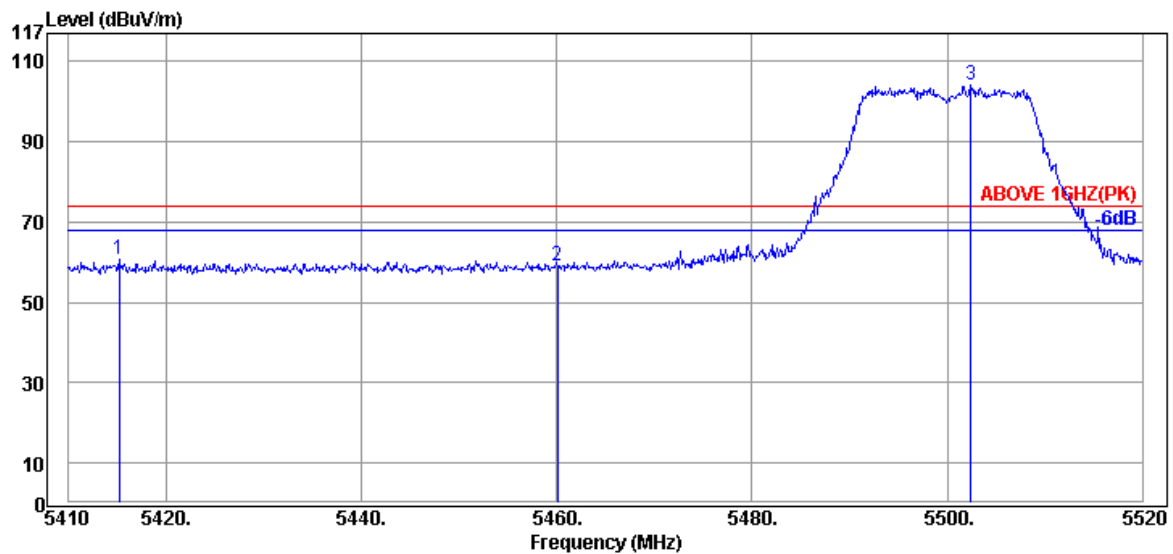

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.17	34.83	10.82	14.96	60.61	74.00	13.39	Peak
5460.05	34.70	10.84	13.67	59.21	74.00	14.79	Peak
@ 5502.40	34.60	10.88	58.63	104.11	---	---	Peak

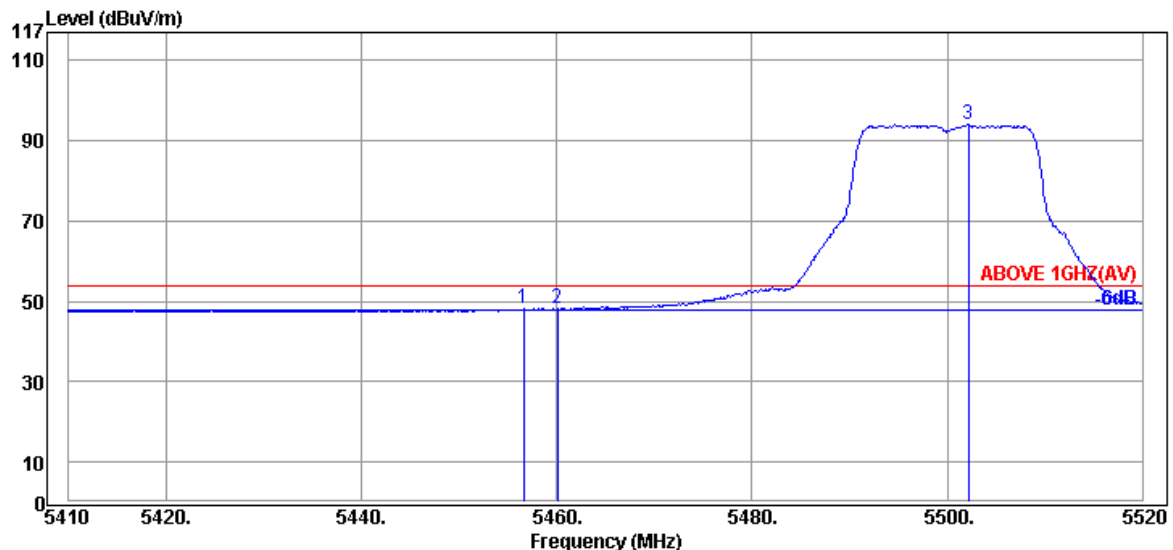

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.64	34.70	10.84	2.66	48.20	54.00	5.80	Average
5460.05	34.70	10.84	2.63	48.17	54.00	5.83	Average
@ 5502.18	34.60	10.88	48.45	93.93	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

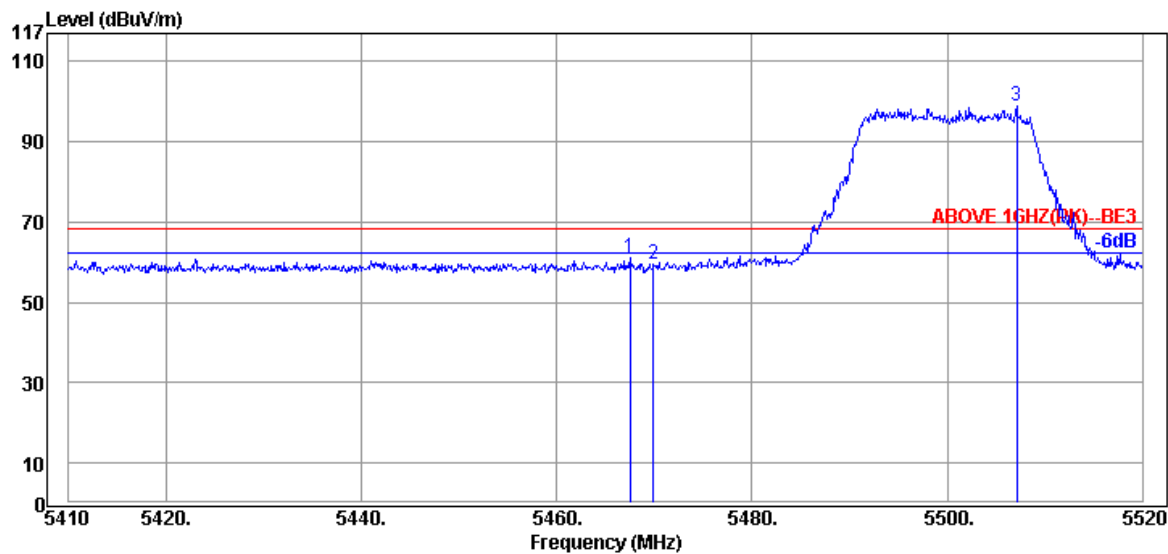

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.53	34.67	10.85	15.49	61.01	68.20	7.19	Peak
5469.95	34.67	10.85	14.11	59.63	68.20	8.57	Peak
@ 5507.13	34.60	10.88	53.37	98.85	---	---	Peak

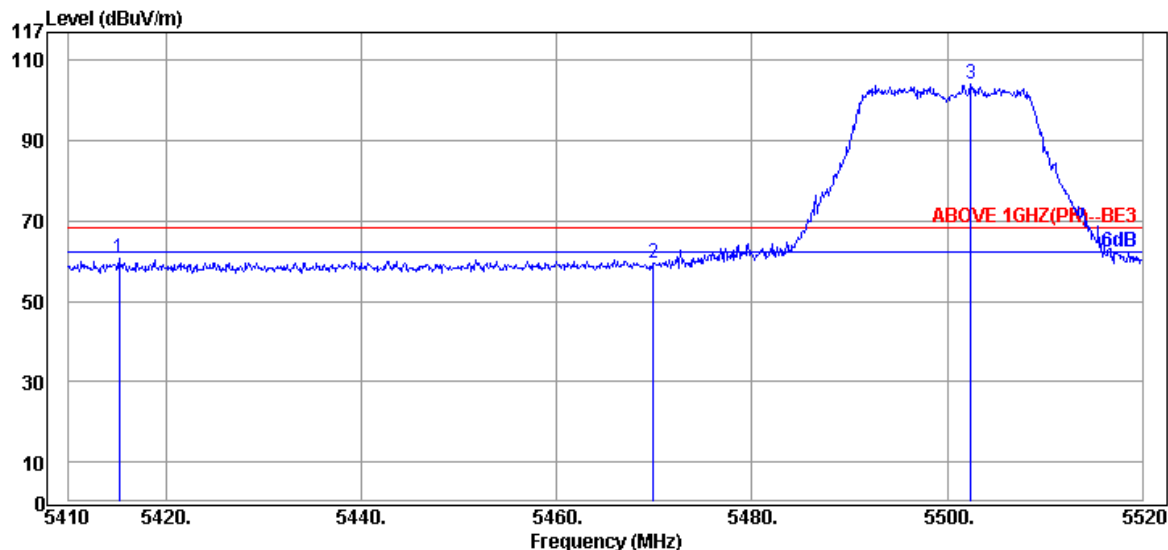

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.17	34.83	10.82	14.96	60.61	68.20	7.59	Peak
5469.95	34.67	10.85	14.17	59.69	68.20	8.51	Peak
@ 5502.40	34.60	10.88	58.63	104.11	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

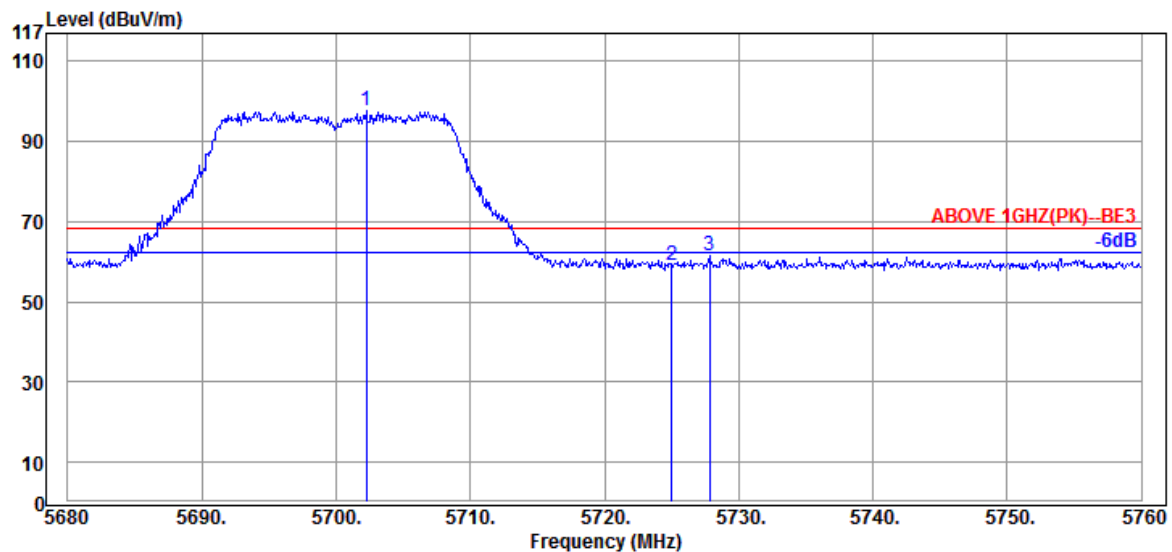

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.24	34.87	10.90	51.81	97.58	---	---	Peak
5725.00	34.83	10.91	13.34	59.08	68.20	9.12	Peak
5727.84	34.83	10.91	15.59	61.33	68.20	6.87	Peak

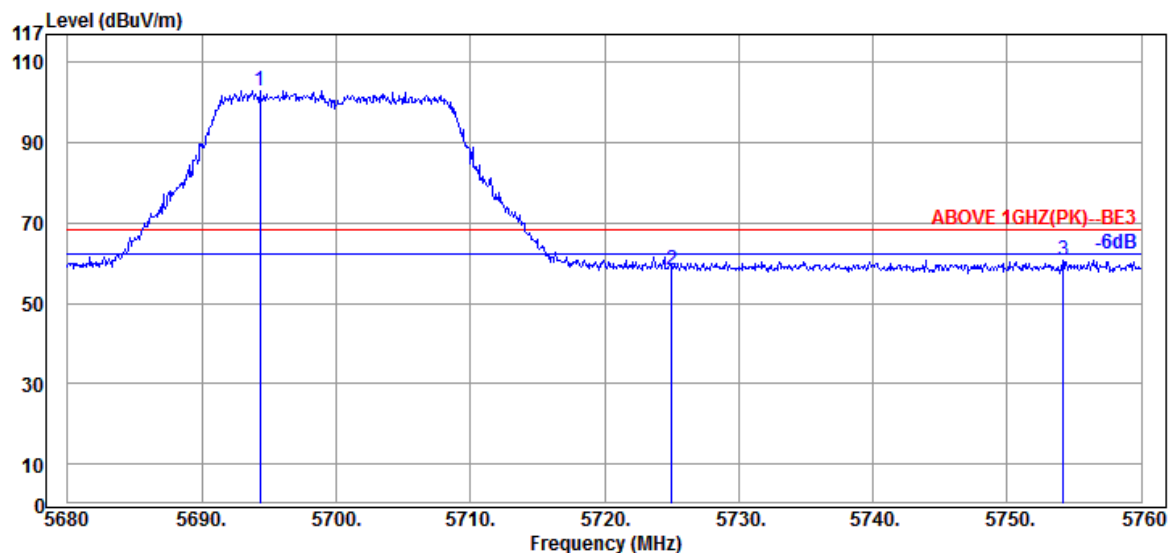

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5694.32	34.90	10.90	57.11	102.91	---	---	Peak
5725.00	34.83	10.91	12.69	58.43	68.20	9.77	Peak
5754.16	34.87	10.91	14.85	60.63	68.20	7.57	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

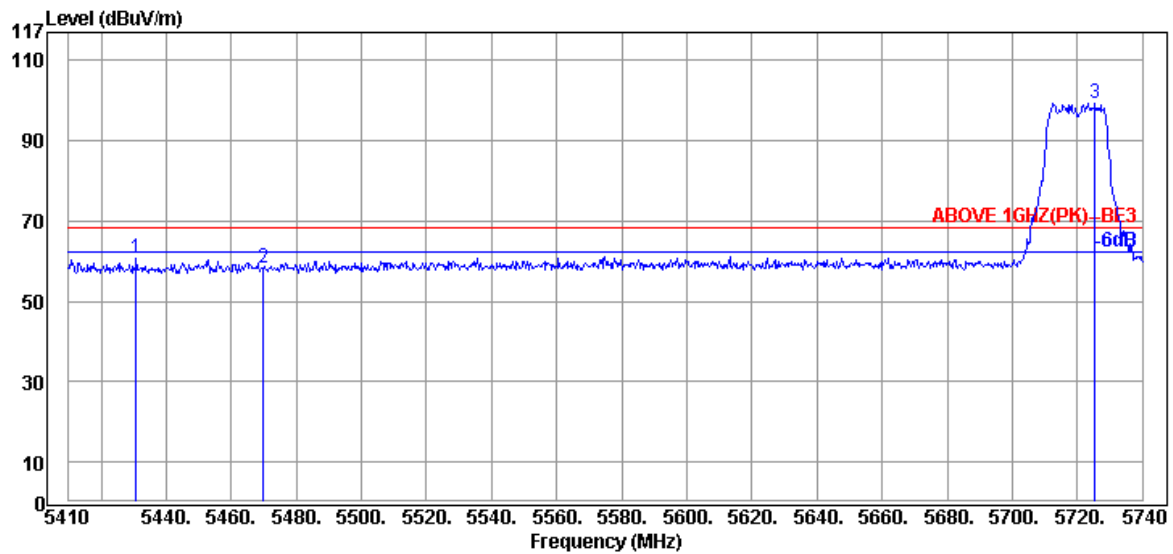

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.79	34.78	10.83	15.05	60.66	68.20	7.54	Peak
5470.00	34.66	10.86	12.62	58.14	68.20	10.06	Peak
@ 5725.48	34.85	10.91	53.47	99.23	---	---	Peak

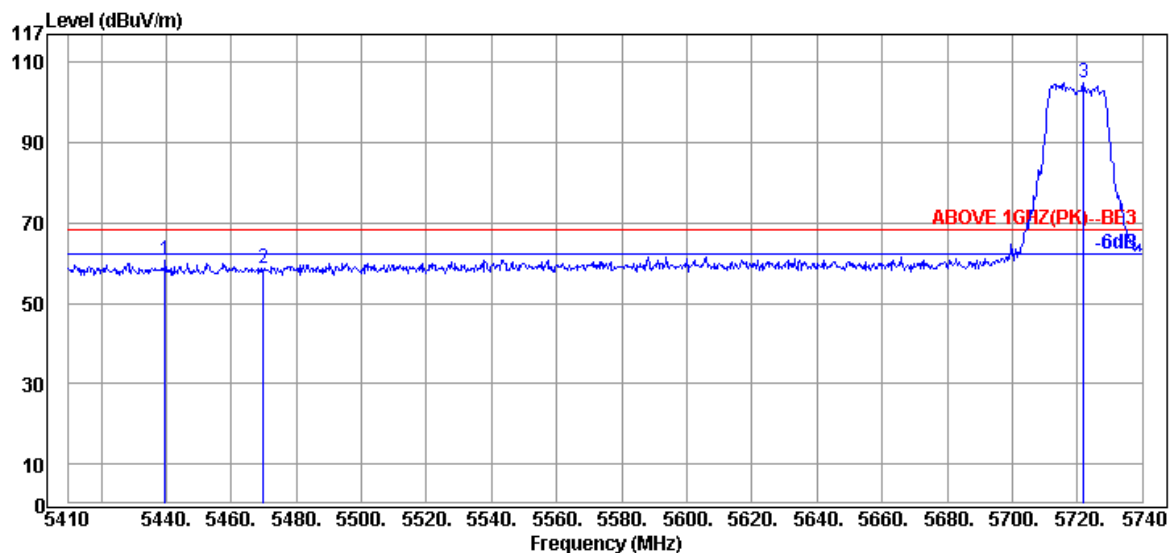

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.70	34.74	10.83	14.99	60.56	68.20	7.64	Peak
5470.00	34.66	10.86	13.12	58.64	68.20	9.56	Peak
@ 5721.85	34.86	10.91	59.20	104.97	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

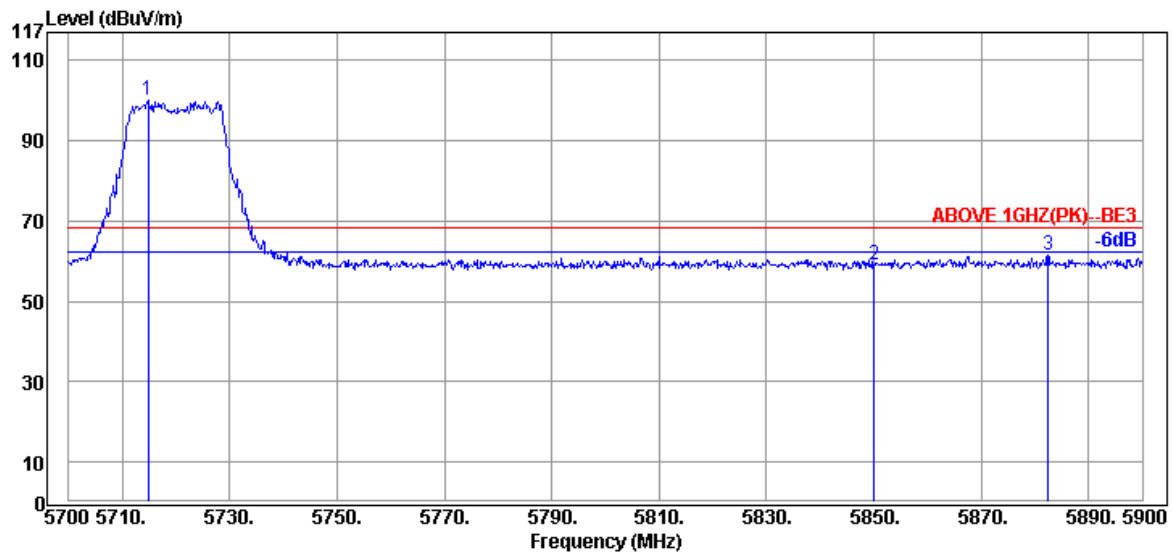

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.80	34.87	10.90	54.27	100.04	---	---	Peak
5850.00	35.50	10.92	12.73	59.15	68.20	9.05	Peak
5882.40	35.57	10.93	15.04	61.54	68.20	6.66	Peak

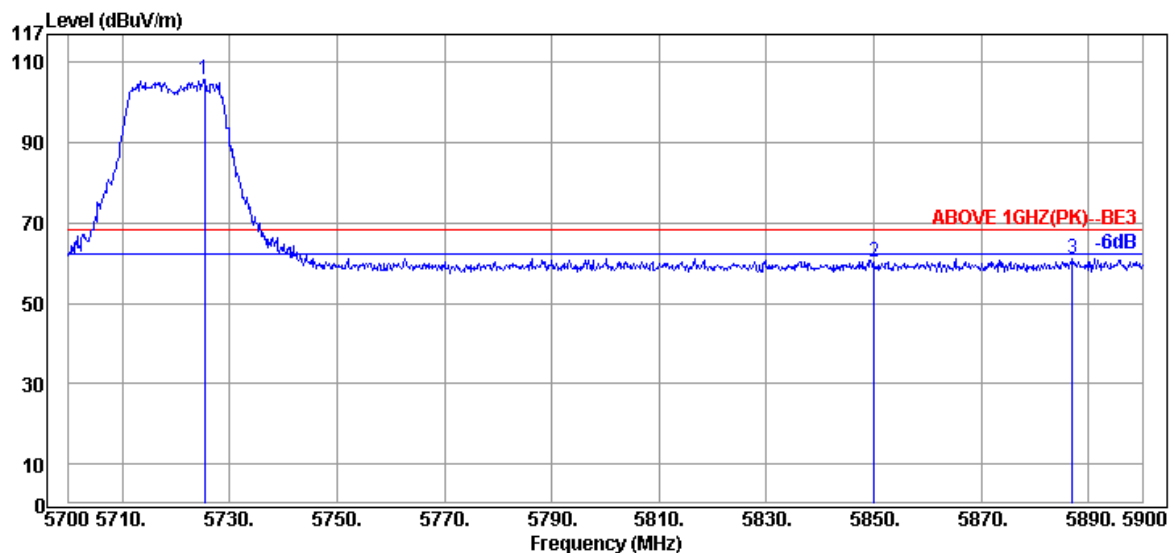

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5725.40	34.83	10.91	60.08	105.82	---	---	Peak
5850.00	35.50	10.92	13.85	60.27	68.20	7.93	Peak
5887.00	35.57	10.93	14.66	61.16	68.20	7.04	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

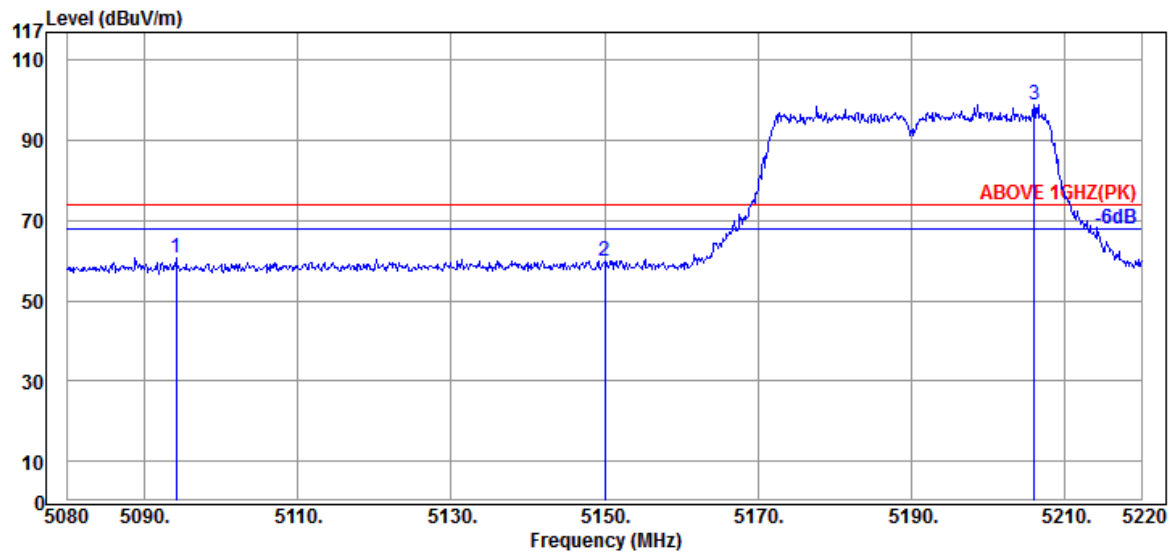

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5094.14	34.50	10.57	15.79	60.86	74.00	13.14	Peak
5150.00	34.70	10.61	14.45	59.76	74.00	14.24	Peak
@ 5206.00	34.50	10.65	53.89	99.04	---	---	Peak

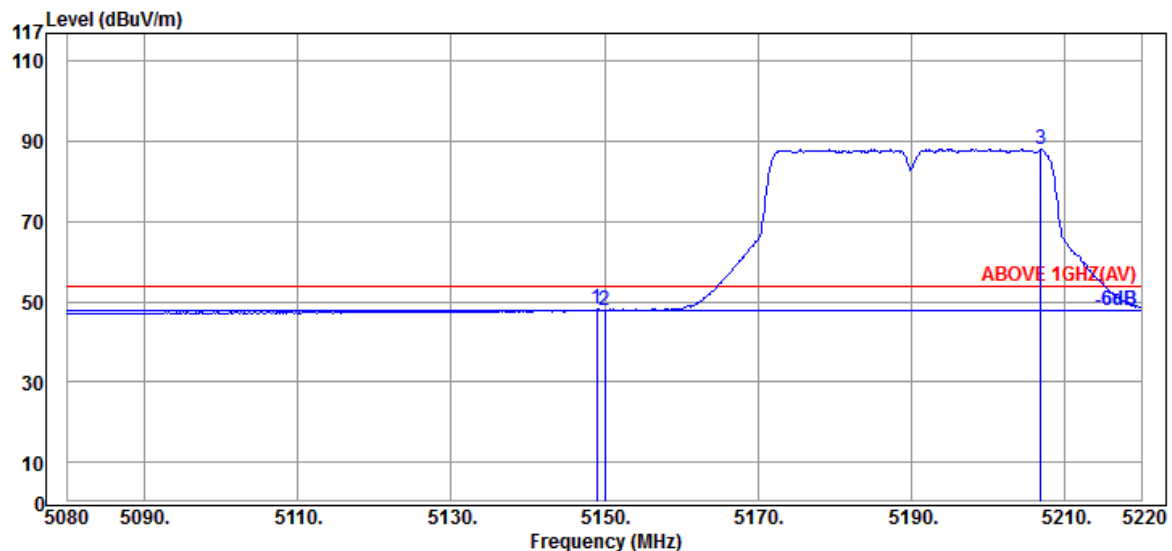

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.02	34.70	10.61	2.79	48.10	54.00	5.90	Average
5150.00	34.70	10.61	2.53	47.84	54.00	6.16	Average
@ 5206.84	34.50	10.65	42.91	88.06	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

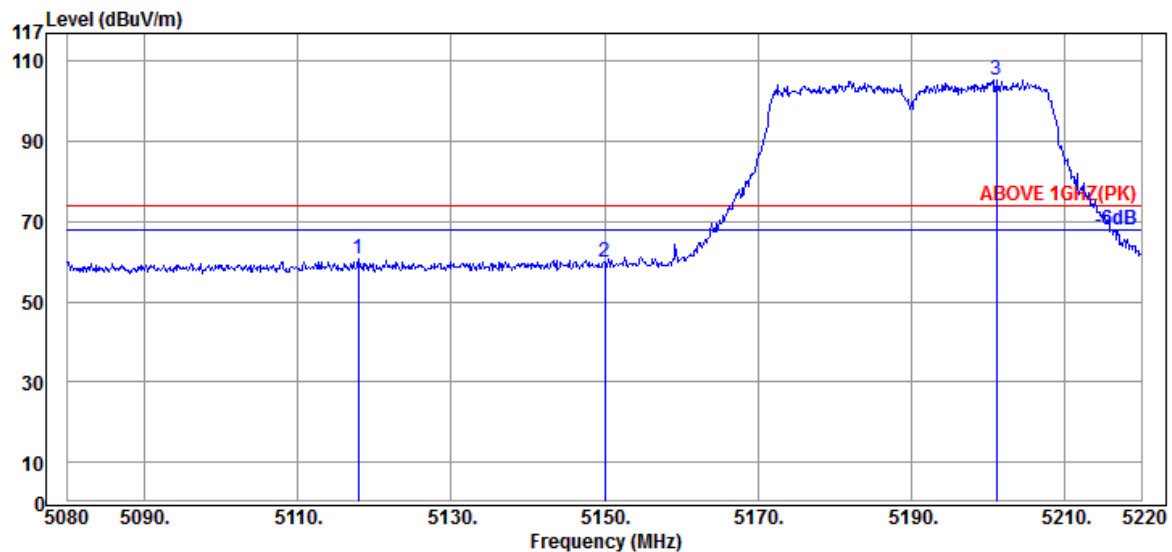

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.94	34.57	10.58	15.42	60.57	74.00	13.43	Peak
5150.00	34.70	10.61	14.41	59.72	74.00	14.28	Peak
@ 5201.10	34.50	10.65	60.19	105.34	---	---	Peak

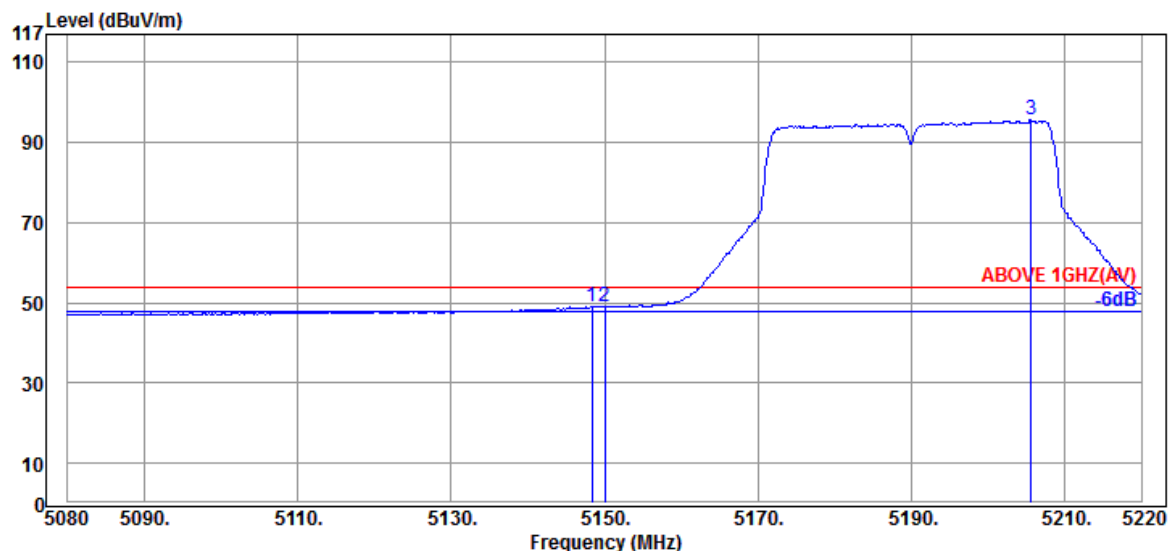

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.32	34.70	10.61	3.80	49.11	54.00	4.89	Average
5150.00	34.70	10.61	3.57	48.88	54.00	5.12	Average
@ 5205.58	34.50	10.65	50.47	95.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

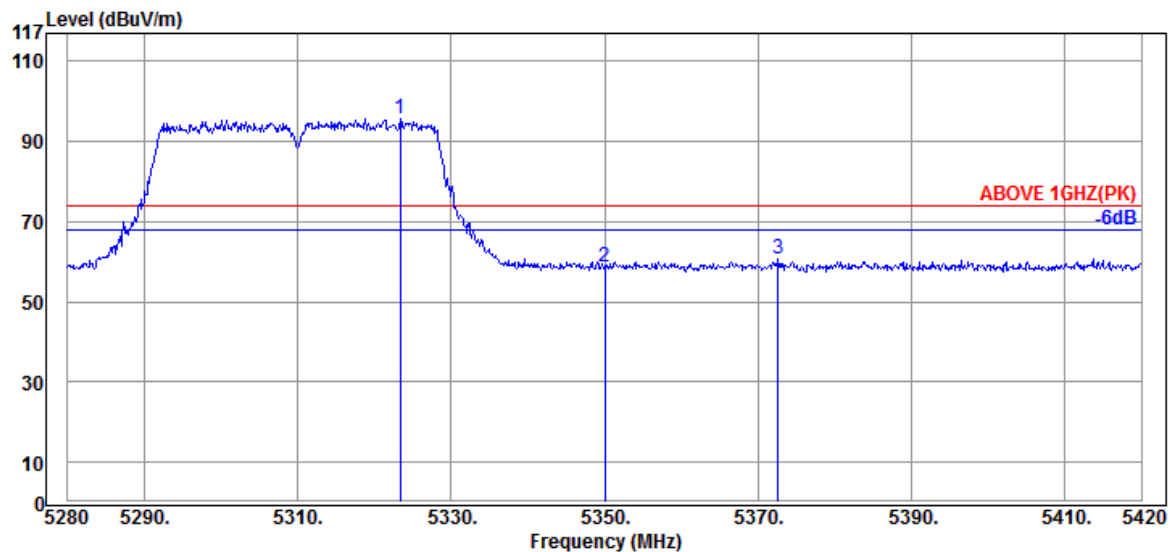

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.40	34.67	10.74	50.14	95.55	---	---	Peak
5350.00	34.80	10.76	13.24	58.80	74.00	15.20	Peak
5372.68	34.83	10.78	15.16	60.77	74.00	13.23	Peak

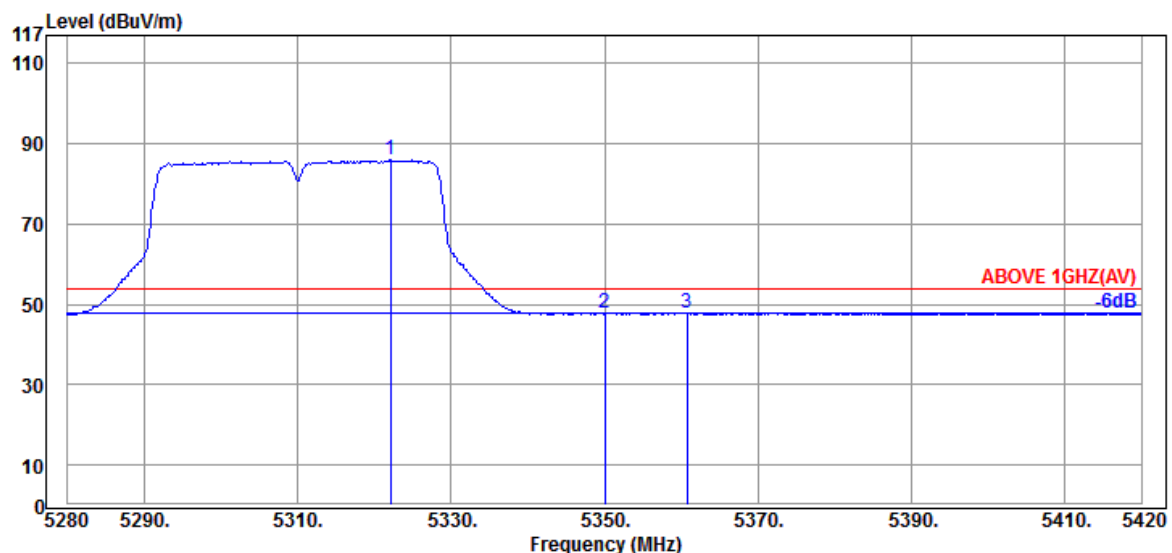

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.14	34.67	10.74	40.47	85.88	---	---	Average
5350.00	34.80	10.76	2.13	47.69	54.00	6.31	Average
5360.78	34.83	10.78	2.38	47.99	54.00	6.01	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

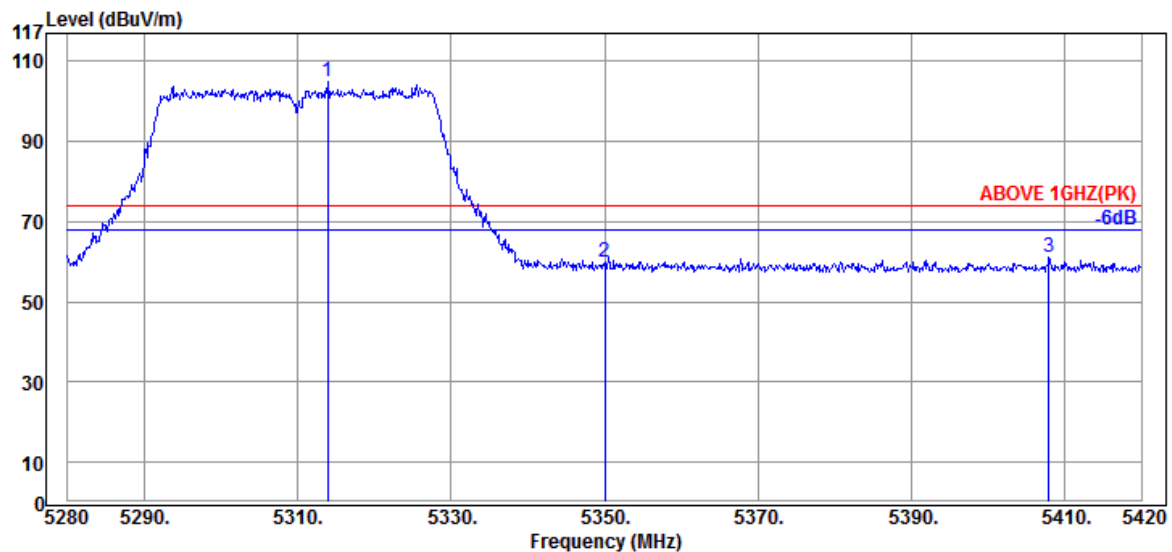

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.88	34.67	10.74	59.42	104.83	---	---	Peak
5350.00	34.80	10.76	14.34	59.90	74.00	14.10	Peak
5407.96	34.90	10.80	15.60	61.30	74.00	12.70	Peak

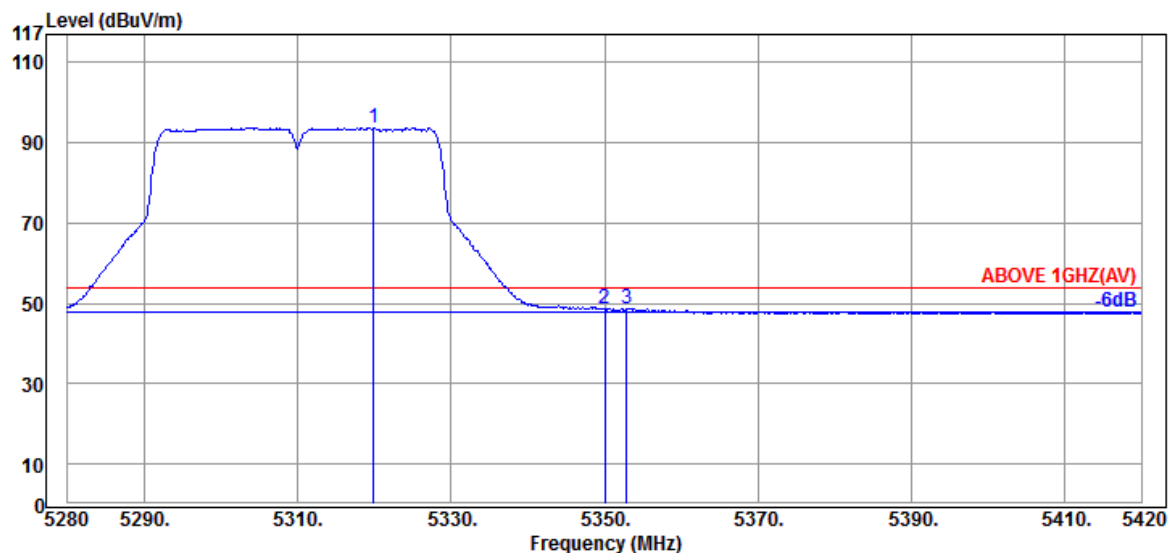

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.90	34.67	10.74	48.42	93.83	---	---	Average
5350.00	34.80	10.76	2.90	48.46	54.00	5.54	Average
5352.94	34.80	10.76	3.08	48.64	54.00	5.36	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

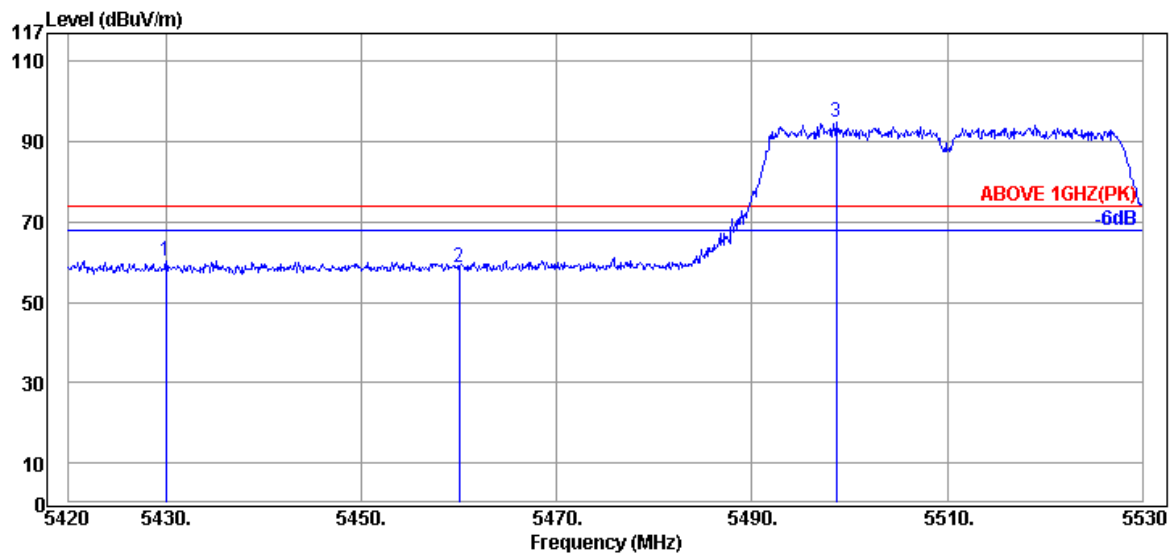

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.01	34.78	10.83	14.79	60.40	74.00	13.60	Peak
5460.04	34.68	10.85	13.30	58.83	74.00	15.17	Peak
@ 5498.65	34.60	10.88	49.43	94.91	---	---	Peak

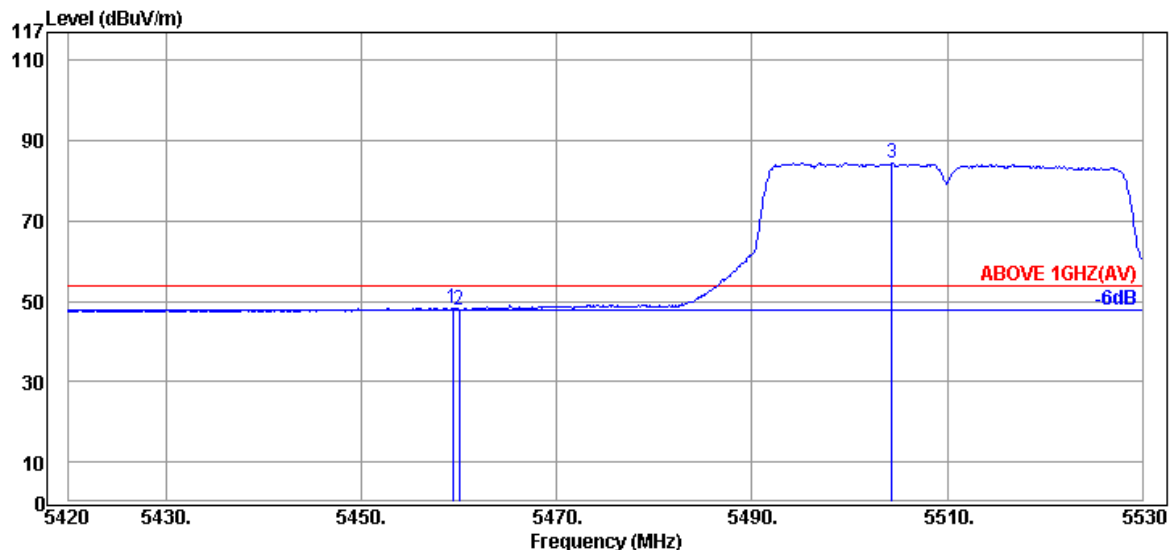

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.38	34.68	10.85	2.85	48.38	54.00	5.62	Average
5460.04	34.68	10.85	2.51	48.04	54.00	5.96	Average
@ 5504.37	34.61	10.88	38.93	84.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

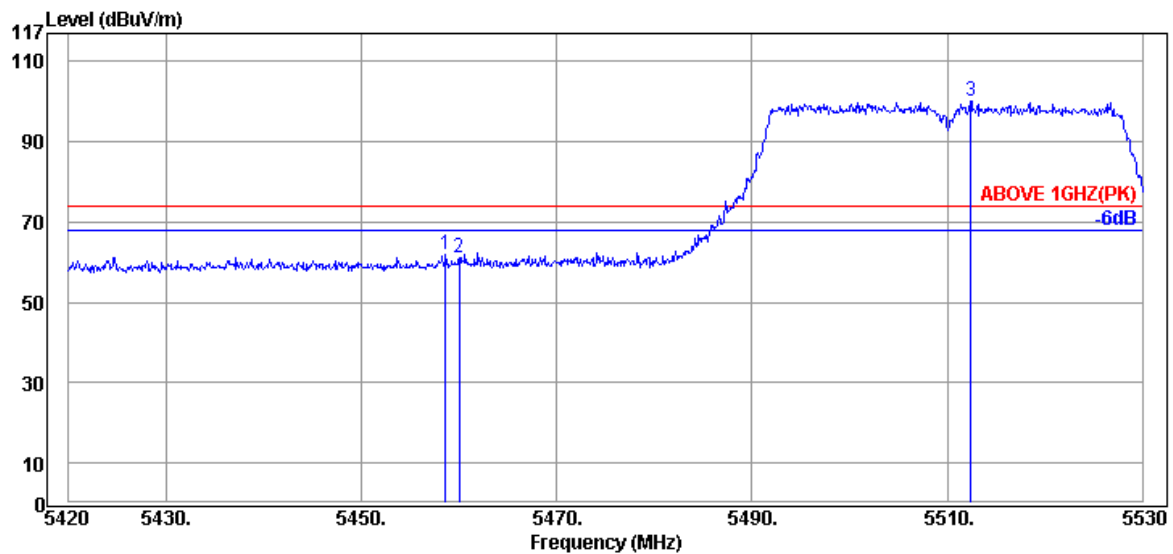

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.61	34.68	10.85	16.30	61.83	74.00	12.17	Peak
5460.04	34.68	10.85	15.58	61.11	74.00	12.89	Peak
@ 5512.40	34.62	10.88	54.59	100.09	---	---	Peak

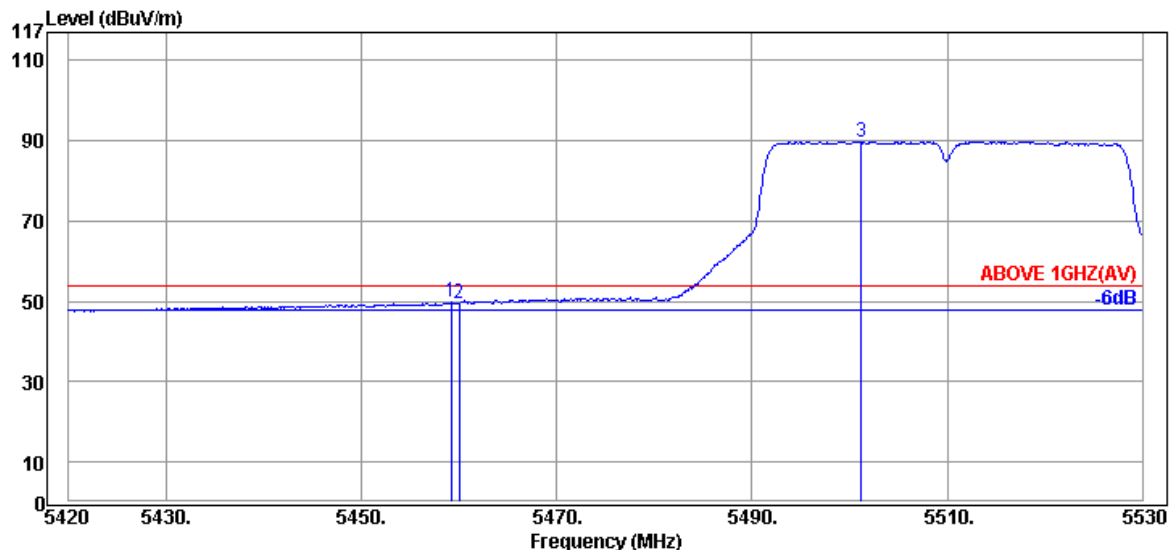

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.16	34.68	10.85	4.18	49.71	54.00	4.29	Average
5460.04	34.68	10.85	3.92	49.45	54.00	4.55	Average
@ 5501.18	34.60	10.88	44.32	89.80	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

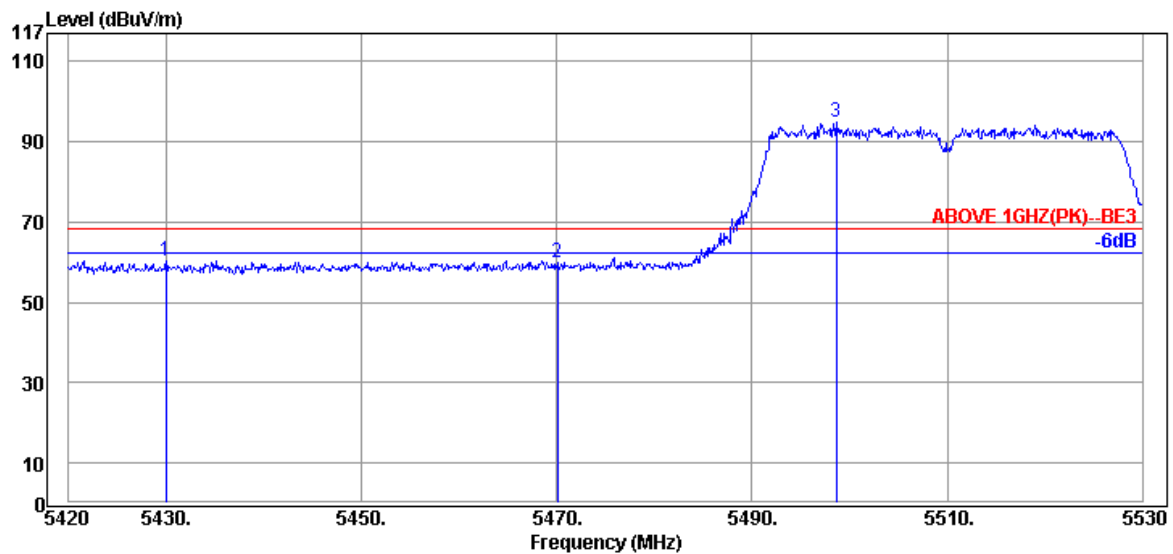

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.01	34.78	10.83	14.79	60.40	68.20	7.80	Peak
5470.05	34.66	10.86	14.25	59.77	68.20	8.43	Peak
@ 5498.65	34.60	10.88	49.43	94.91	---	---	Peak

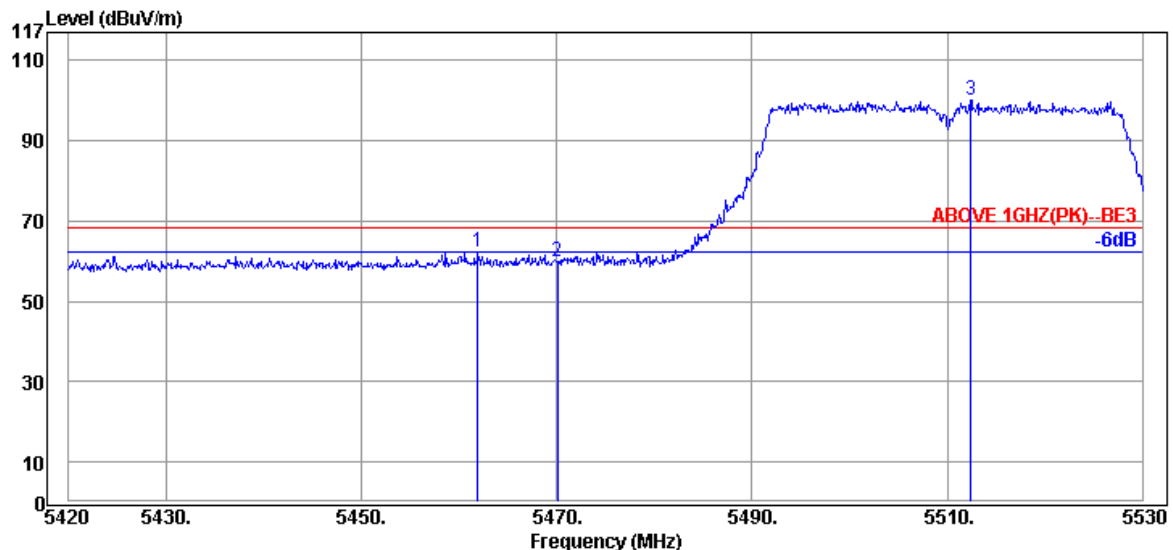

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.91	34.68	10.85	16.60	62.13	68.20	6.07	Peak
5470.05	34.66	10.86	14.26	59.78	68.20	8.42	Peak
@ 5512.40	34.62	10.88	54.59	100.09	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

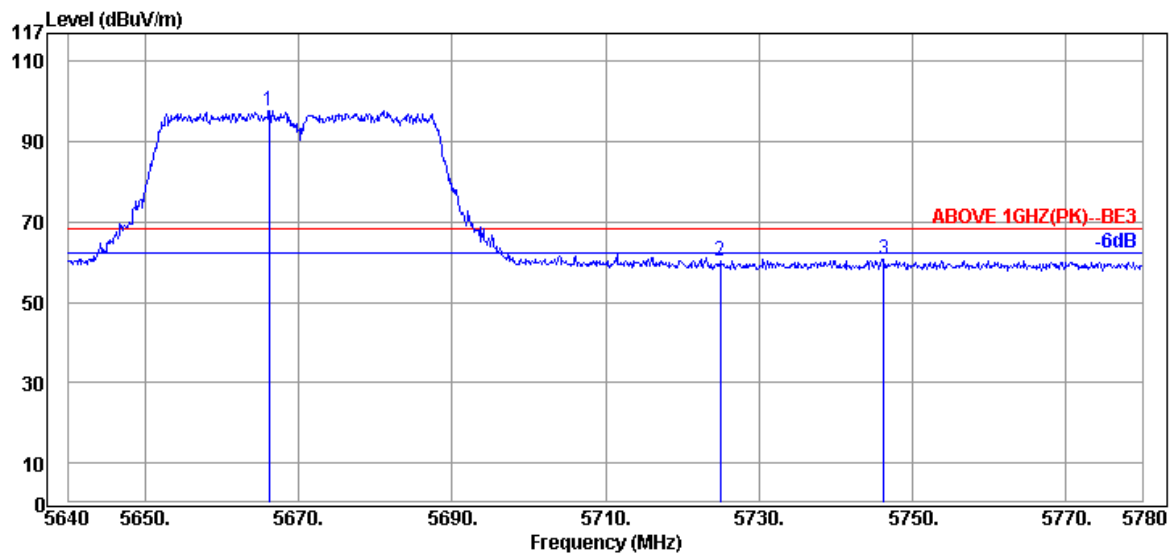

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5666.18	34.80	10.90	52.06	97.76	---	---	Peak
5725.00	34.83	10.91	14.67	60.41	68.20	7.79	Peak
5746.26	34.80	10.91	15.10	60.81	68.20	7.39	Peak

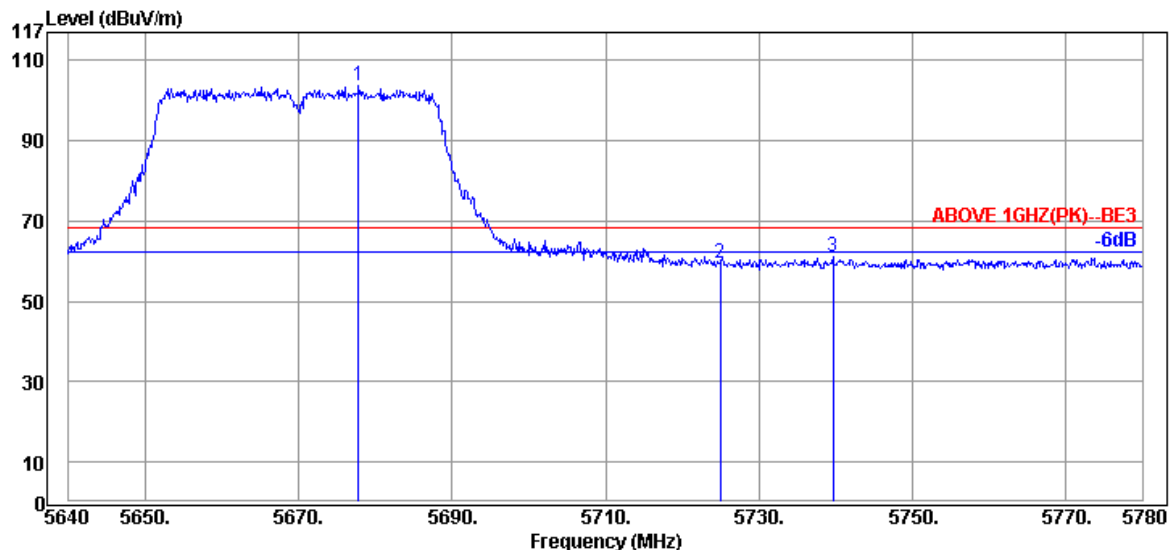

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.80	34.85	10.90	58.00	103.75	---	---	Peak
5725.00	34.83	10.91	13.82	59.56	68.20	8.64	Peak
5739.68	34.80	10.91	15.57	61.28	68.20	6.92	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

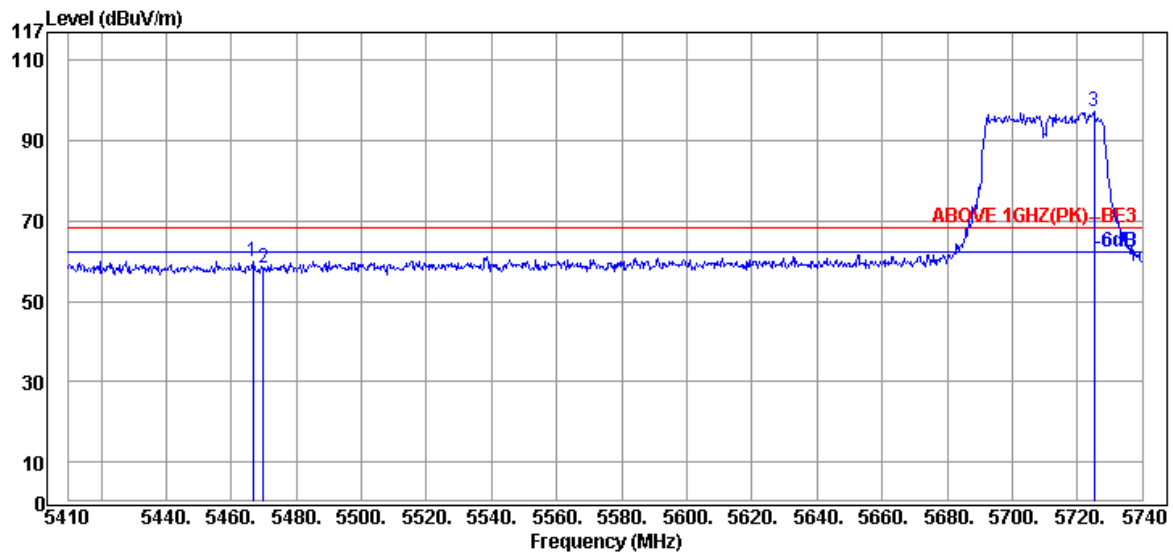

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.76	34.67	10.85	14.56	60.08	68.20	8.12	Peak
5470.00	34.66	10.86	12.83	58.35	68.20	9.85	Peak
@ 5725.15	34.85	10.91	51.50	97.26	---	---	Peak

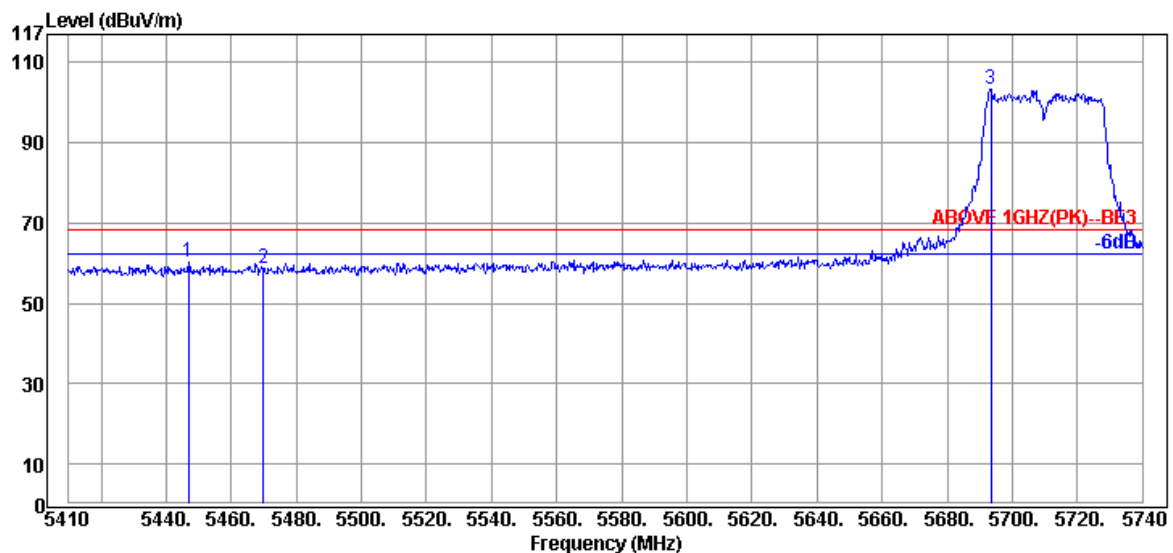

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.96	34.71	10.84	14.68	60.23	68.20	7.97	Peak
5470.00	34.66	10.86	13.30	58.82	68.20	9.38	Peak
@ 5693.47	34.89	10.90	57.69	103.48	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

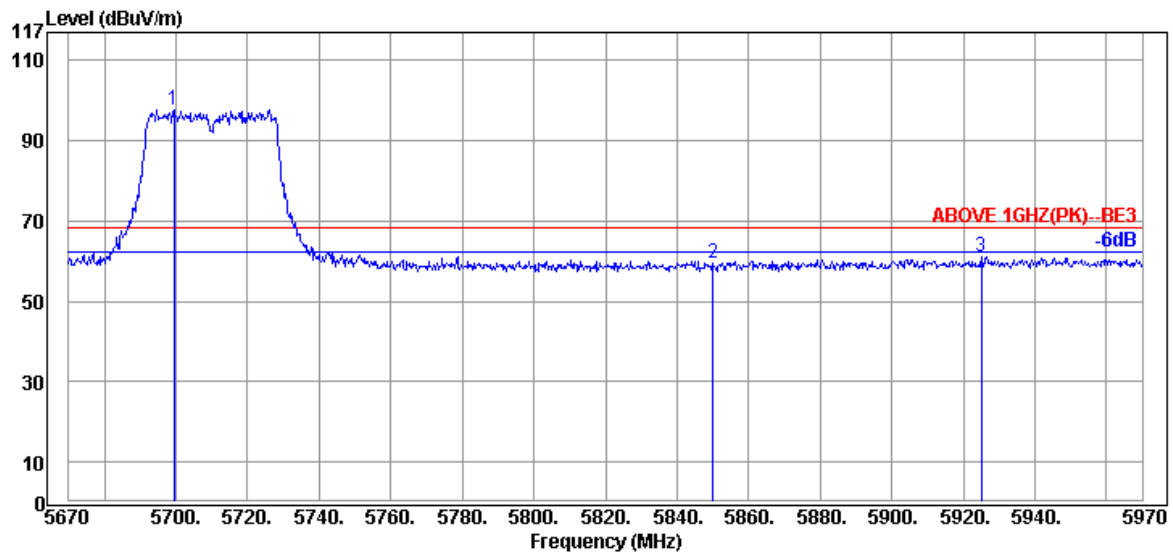

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.40	34.90	10.90	51.92	97.72	---	---	Peak
5850.00	35.50	10.92	12.99	59.41	68.20	8.79	Peak
5925.00	35.73	10.93	14.49	61.15	68.20	7.05	Peak

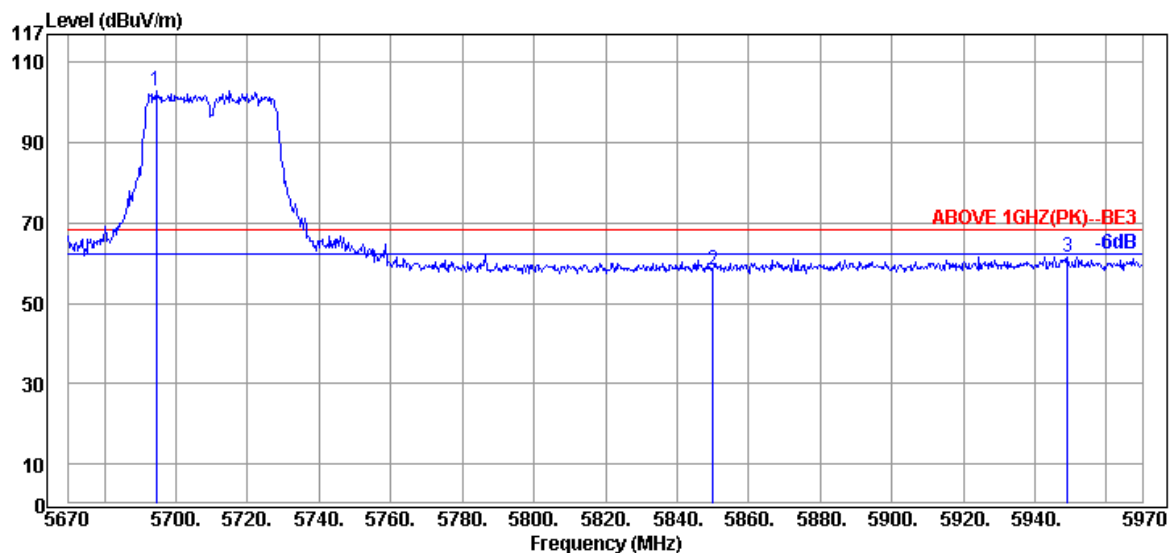

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5694.60	34.90	10.90	57.05	102.85	---	---	Peak
5850.00	35.50	10.92	11.92	58.34	68.20	9.86	Peak
5949.00	35.80	10.93	14.87	61.60	68.20	6.60	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

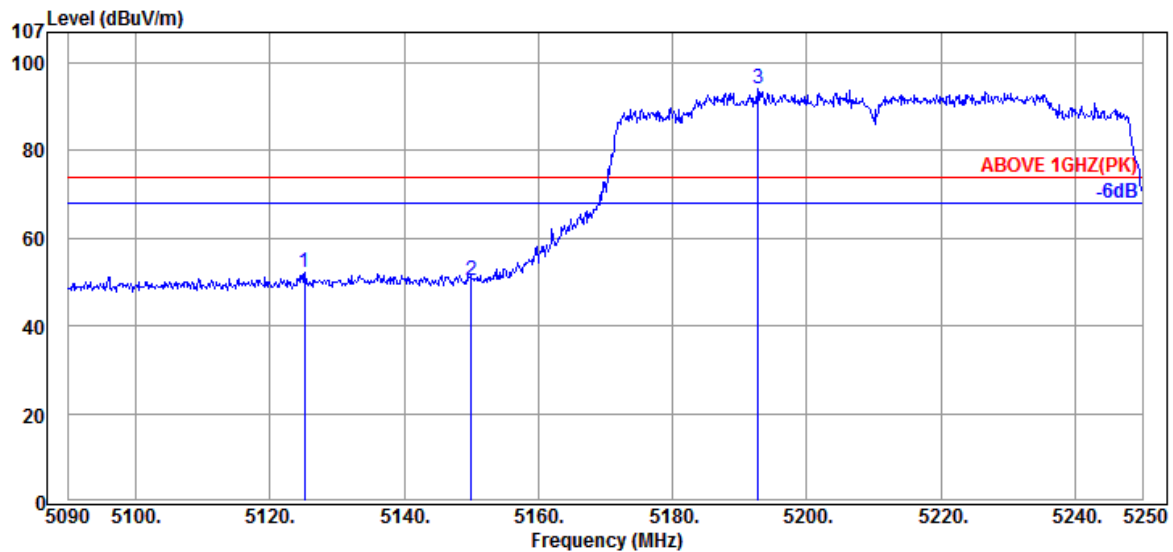

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.20	34.63	10.59	7.13	52.35	74.00	21.65	Peak
5150.00	34.70	10.61	4.92	50.23	74.00	23.77	Peak
@ 5192.72	34.50	10.65	48.88	94.03	---	---	Peak

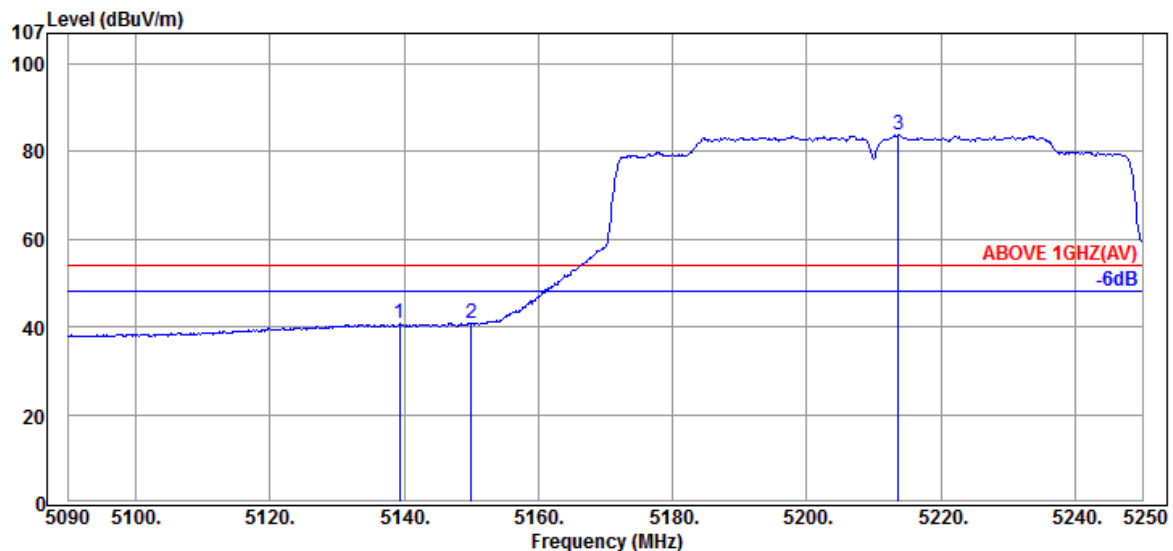

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.28	34.63	10.59	-4.49	40.73	54.00	13.27	Average
5150.00	34.70	10.61	-4.60	40.71	54.00	13.29	Average
@ 5213.68	34.50	10.66	38.69	83.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185

Report Number: EM-F190365


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

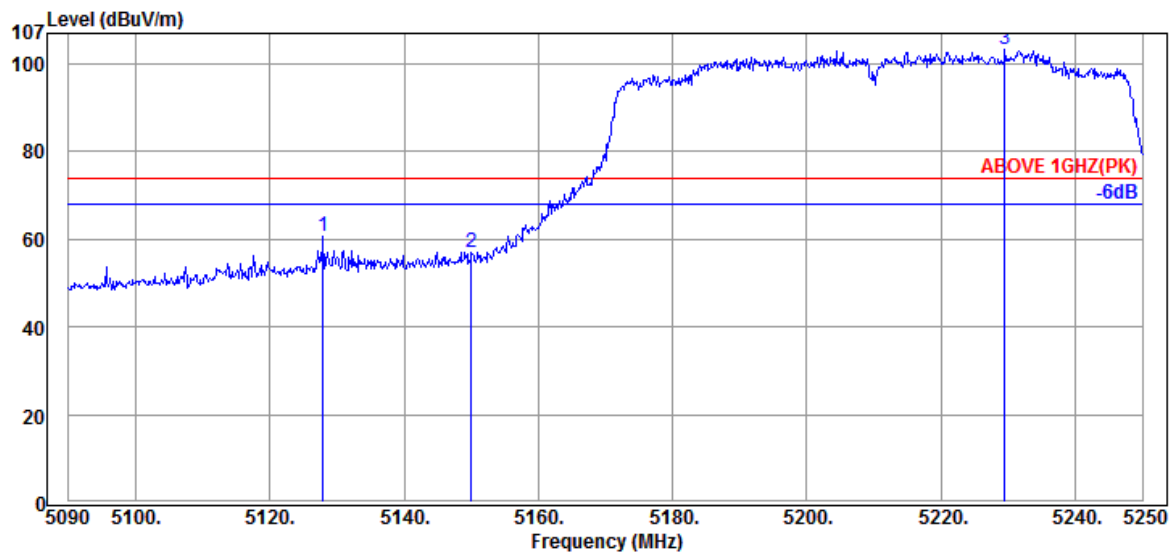

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.92	34.63	10.59	15.37	60.59	74.00	13.41	Peak
5150.00	34.70	10.61	11.53	56.84	74.00	17.16	Peak
@ 5229.52	34.50	10.67	58.08	103.25	---	---	Peak

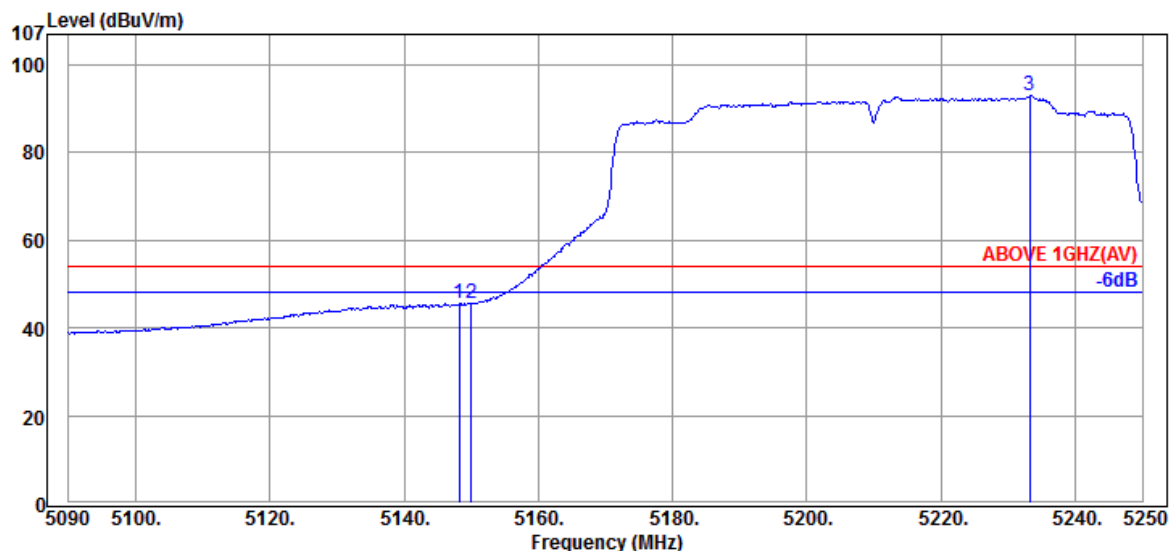

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.24	34.70	10.61	0.32	45.63	54.00	8.37	Average
5150.00	34.70	10.61	0.39	45.70	54.00	8.30	Average
@ 5233.20	34.50	10.67	47.74	92.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

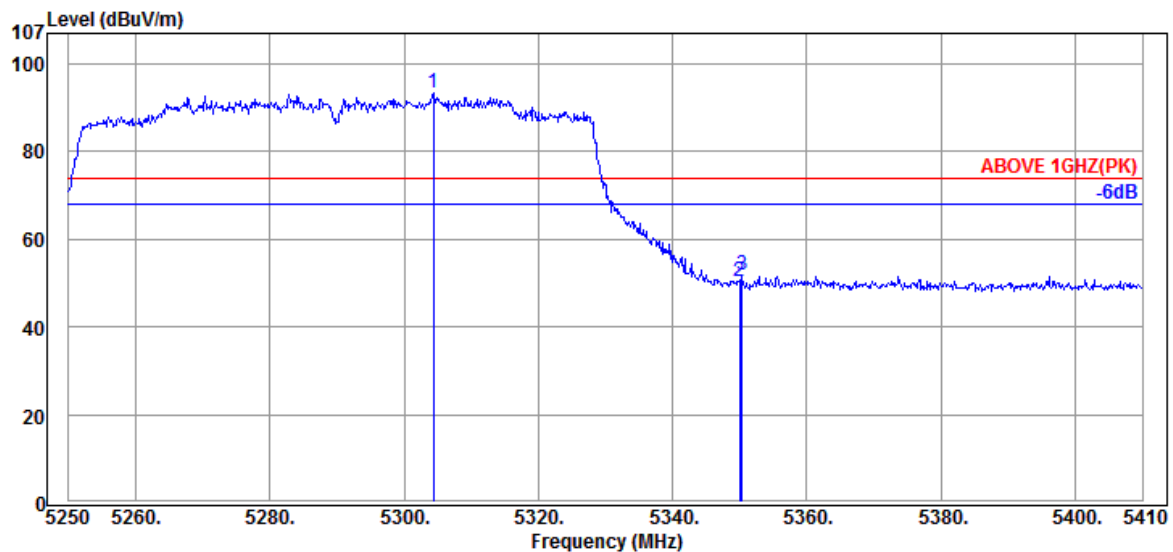

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.40	34.60	10.72	48.04	93.36	---	---	Peak
5350.00	34.80	10.76	4.74	50.30	74.00	23.70	Peak
5350.32	34.80	10.76	6.45	52.01	74.00	21.99	Peak

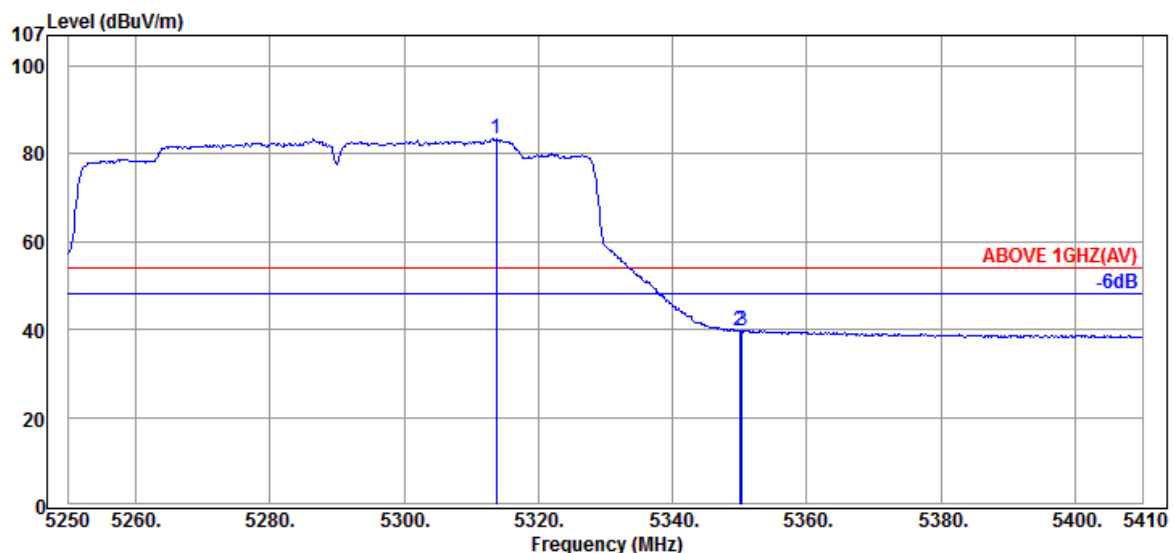

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.68	34.67	10.74	38.04	83.45	---	---	Average
5350.00	34.80	10.76	-5.96	39.60	54.00	14.40	Average
5350.32	34.80	10.76	-5.86	39.70	54.00	14.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

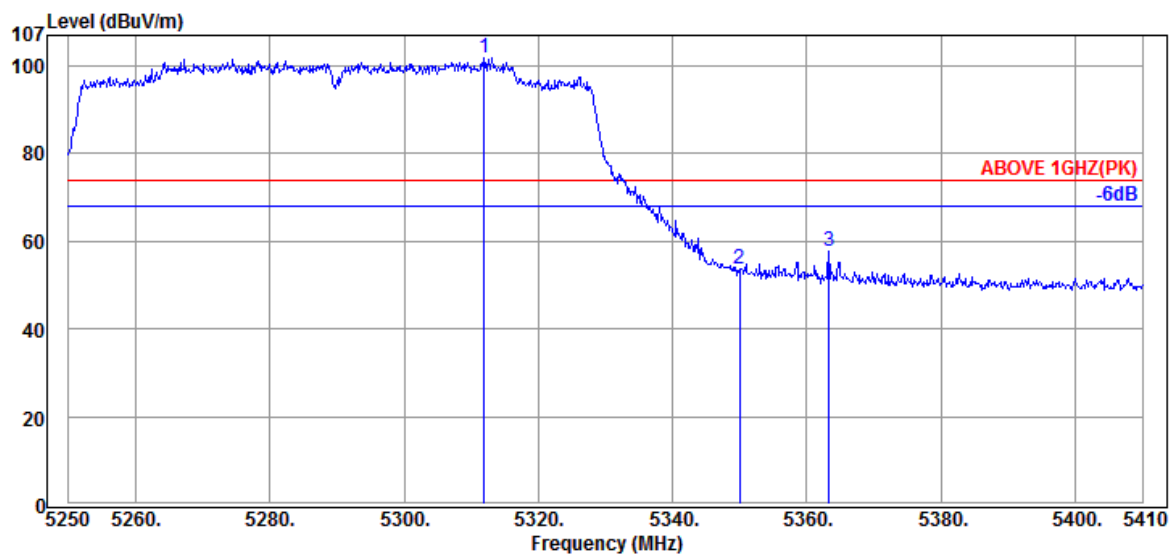

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.92	34.67	10.74	56.54	101.95	---	---	Peak
5350.00	34.80	10.76	8.09	53.65	74.00	20.35	Peak
5363.28	34.83	10.78	12.26	57.87	74.00	16.13	Peak

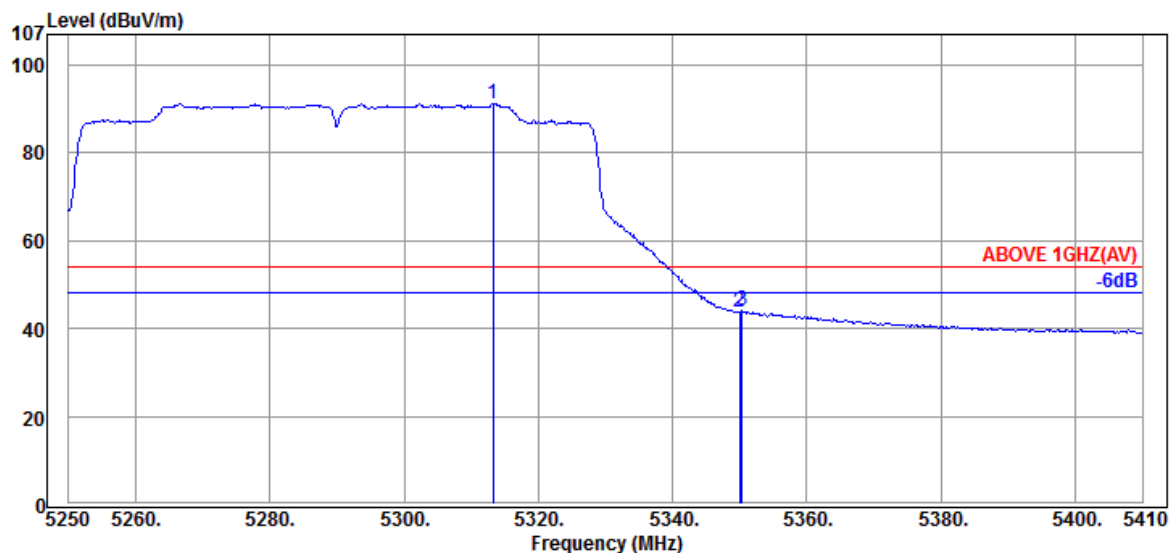

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.20	34.67	10.74	45.83	91.24	---	---	Average
5350.00	34.80	10.76	-1.88	43.68	54.00	10.32	Average
5350.32	34.80	10.76	-1.60	43.96	54.00	10.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

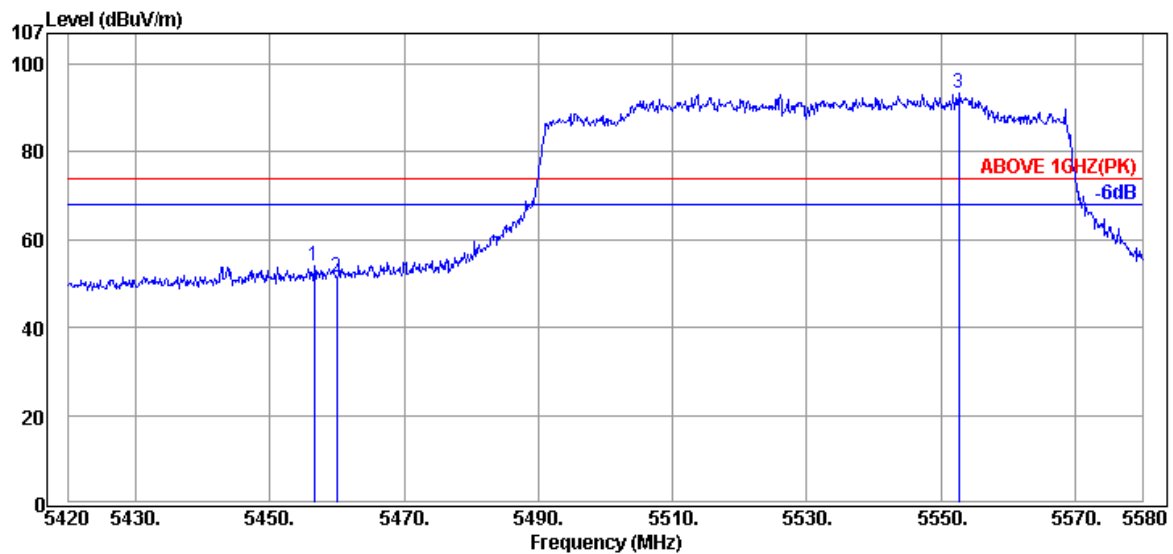

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.64	34.70	10.84	8.51	54.05	74.00	19.95	Peak
5460.00	34.70	10.84	6.12	51.66	74.00	22.34	Peak
@ 5552.64	34.70	10.89	47.66	93.25	---	---	Peak

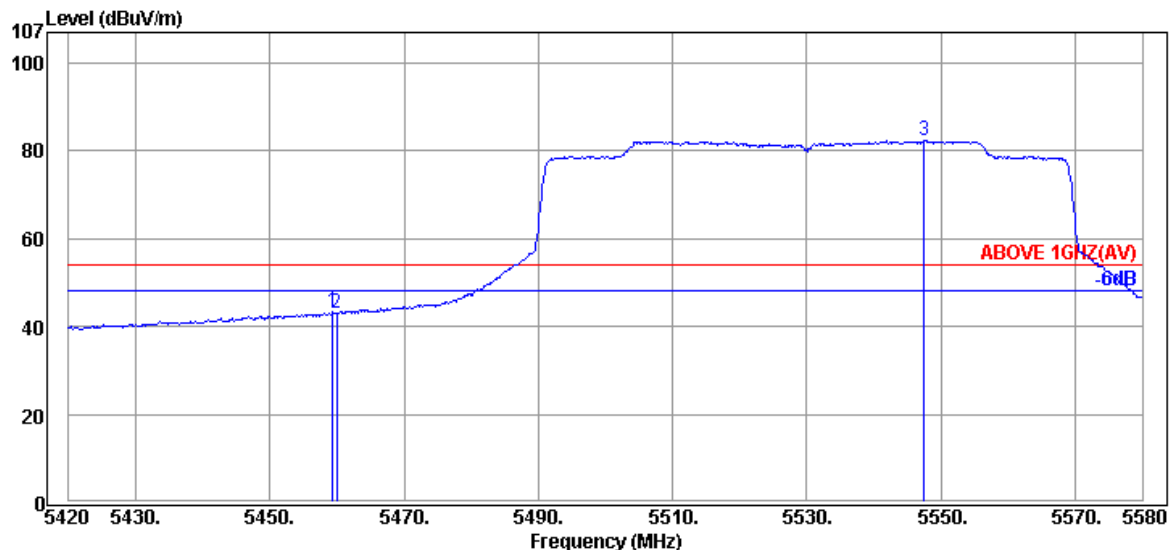

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.36	34.70	10.84	-2.30	43.24	54.00	10.76	Average
5460.00	34.70	10.84	-2.60	42.94	54.00	11.06	Average
@ 5547.52	34.70	10.89	36.66	82.25	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

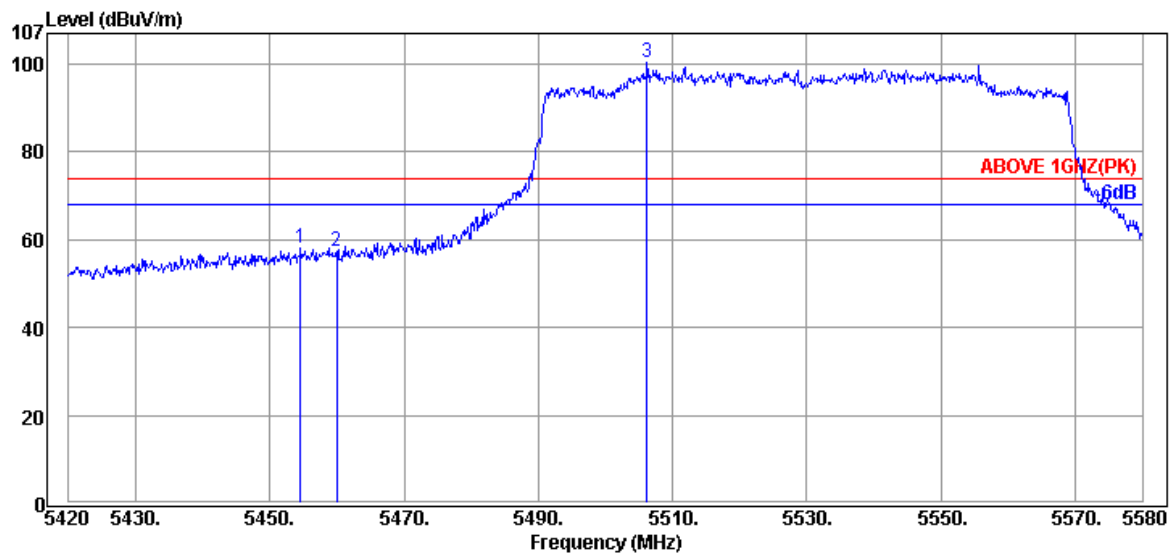

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.56	34.70	10.84	12.68	58.22	74.00	15.78	Peak
5460.00	34.70	10.84	11.70	57.24	74.00	16.76	Peak
@ 5506.24	34.60	10.88	54.72	100.20	---	---	Peak

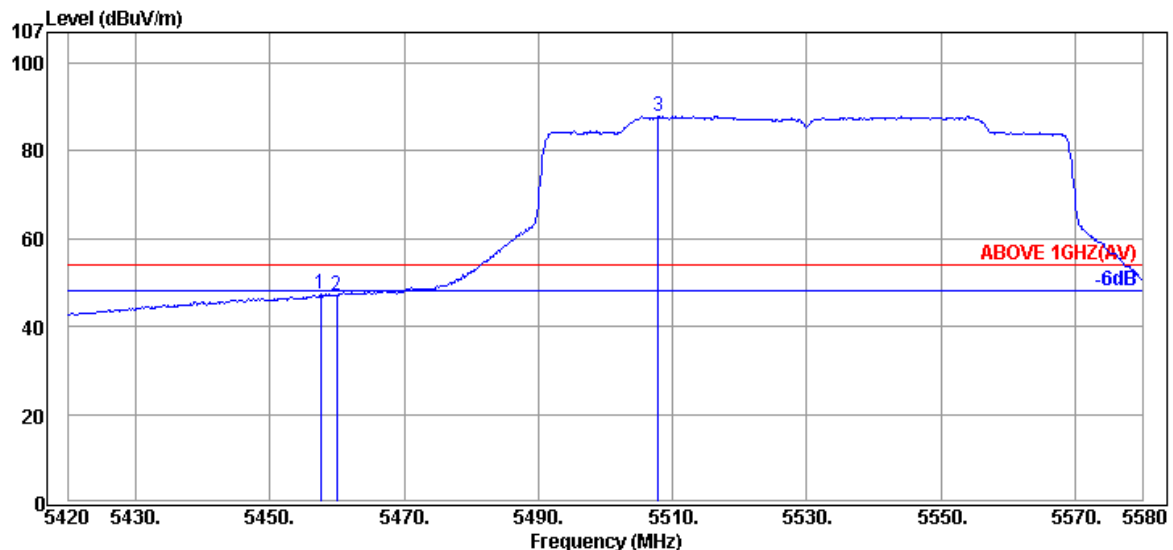

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.60	34.70	10.84	1.78	47.32	54.00	6.68	Average
5460.00	34.70	10.84	1.63	47.17	54.00	6.83	Average
@ 5507.84	34.60	10.88	42.44	87.92	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

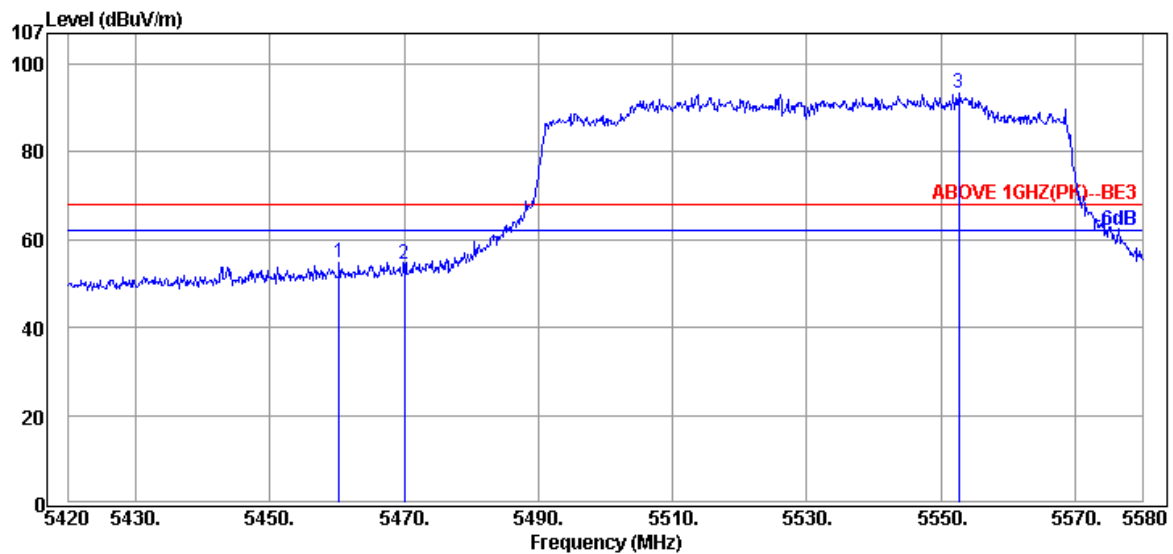

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.32	34.70	10.84	9.25	54.79	68.20	13.41	Peak
5470.08	34.67	10.85	9.01	54.53	68.20	13.67	Peak
@ 5552.64	34.70	10.89	47.66	93.25	---	---	Peak

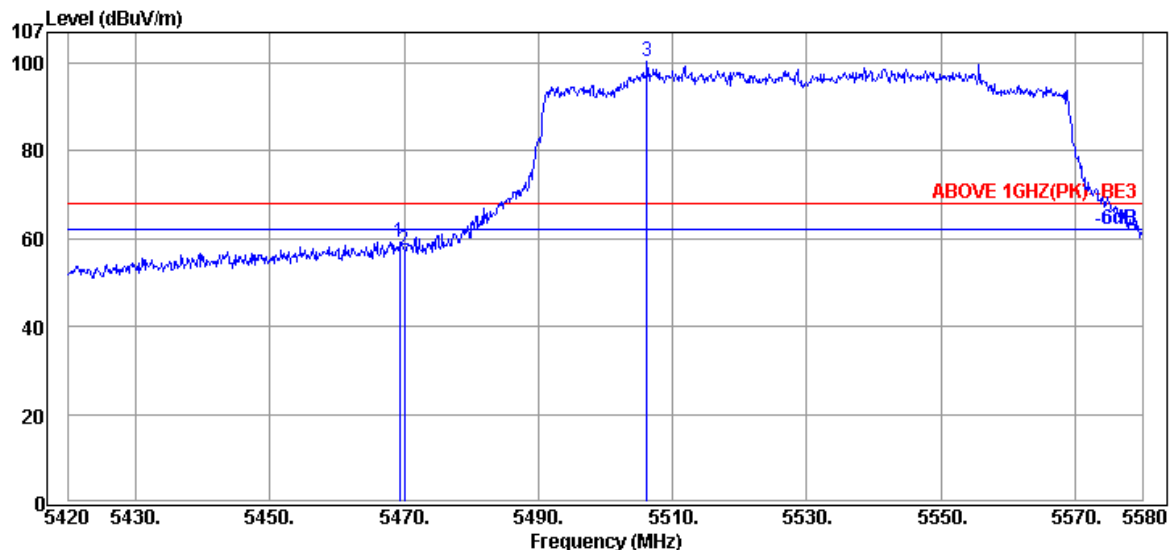

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.28	34.67	10.85	13.82	59.34	68.20	8.86	Peak
5470.08	34.67	10.85	11.73	57.25	68.20	10.95	Peak
@ 5506.24	34.60	10.88	54.72	100.20	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

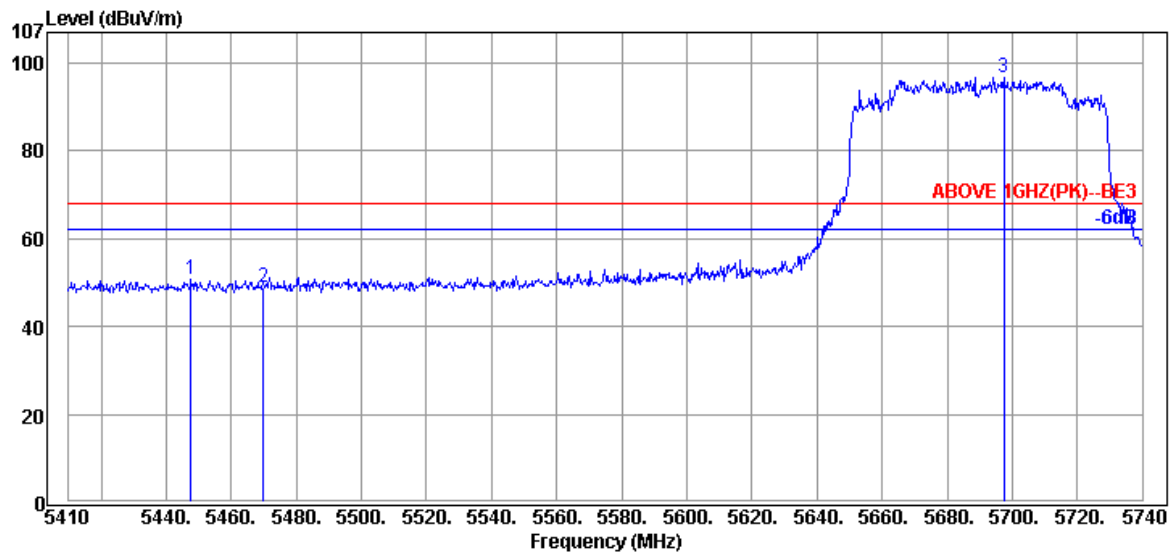

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.62	34.71	10.84	5.33	50.88	68.20	17.32	Peak
5470.00	34.66	10.86	3.30	48.82	68.20	19.38	Peak
@ 5697.43	34.89	10.90	51.07	96.86	---	---	Peak

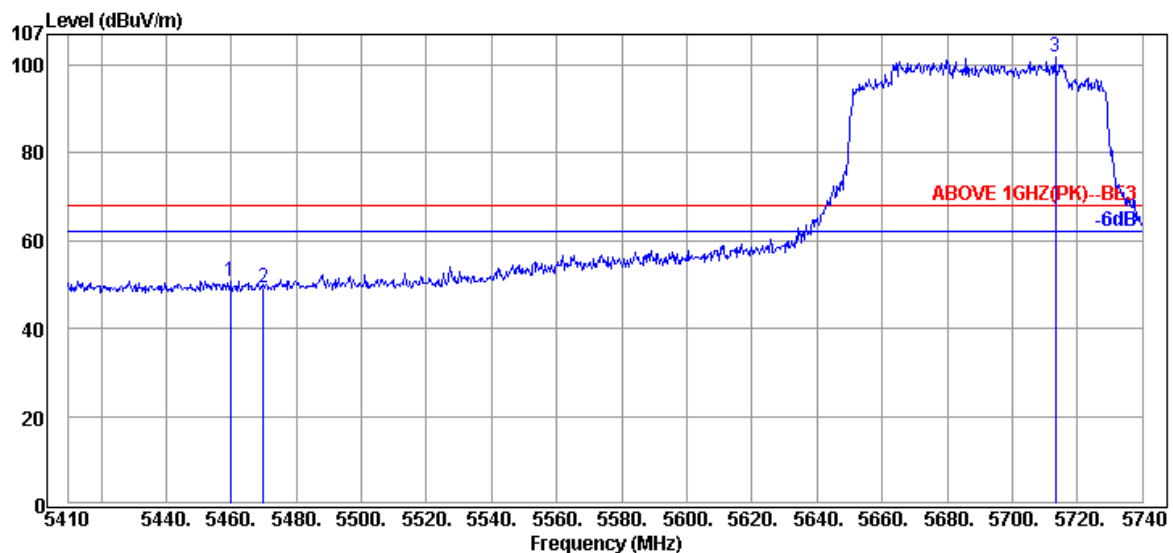

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.83	34.68	10.85	5.36	50.89	68.20	17.31	Peak
5470.00	34.66	10.86	3.92	49.44	68.20	18.76	Peak
@ 5713.27	34.87	10.91	55.93	101.71	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

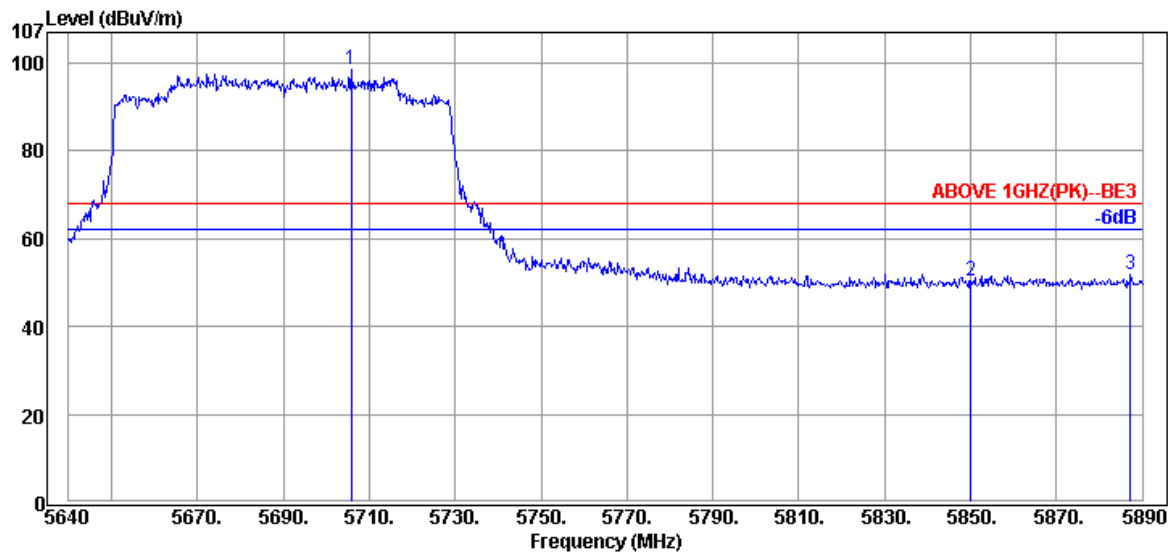

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.75	34.87	10.90	52.69	98.46	---	---	Peak
	5850.00	35.50	10.92	4.06	50.48	68.20	17.72	Peak
	5887.25	35.57	10.93	5.21	51.71	68.20	16.49	Peak

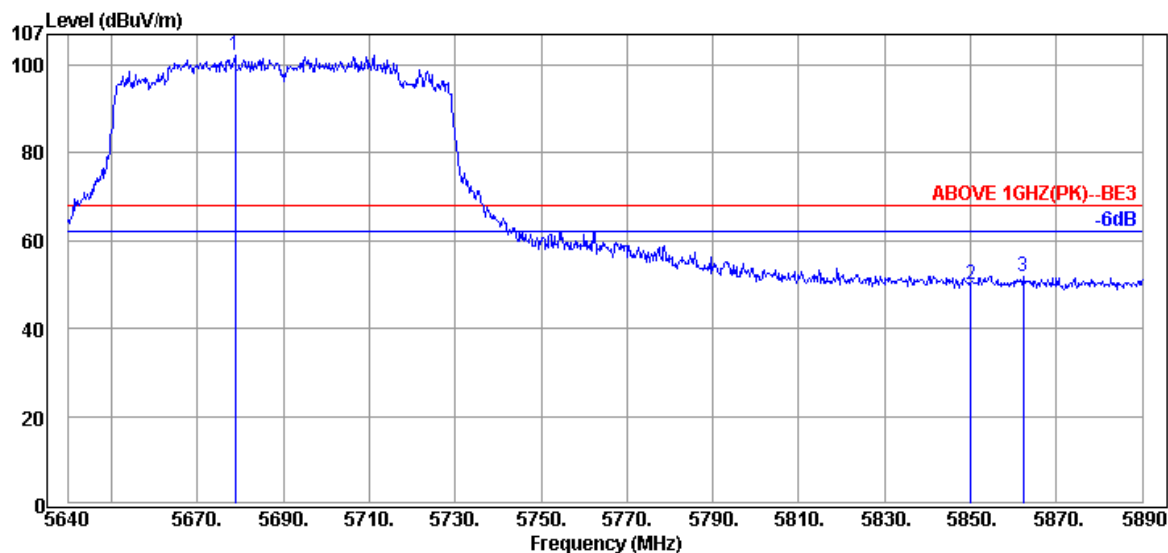

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5678.75	34.85	10.90	56.56	102.31	---	---	Peak
	5850.00	35.50	10.92	3.57	49.99	68.20	18.21	Peak
	5862.25	35.53	10.92	5.50	51.95	68.20	16.25	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

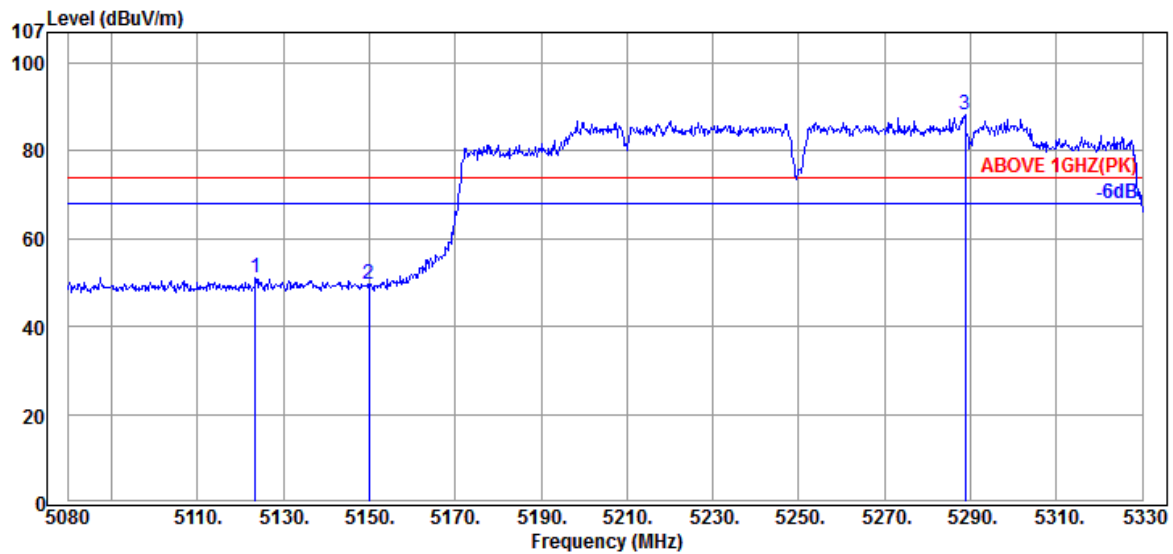

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.50	34.63	10.59	5.96	51.18	74.00	22.82	Peak
5150.00	34.70	10.61	4.28	49.59	74.00	24.41	Peak
@ 5288.75	34.57	10.71	42.82	88.10	---	---	Peak

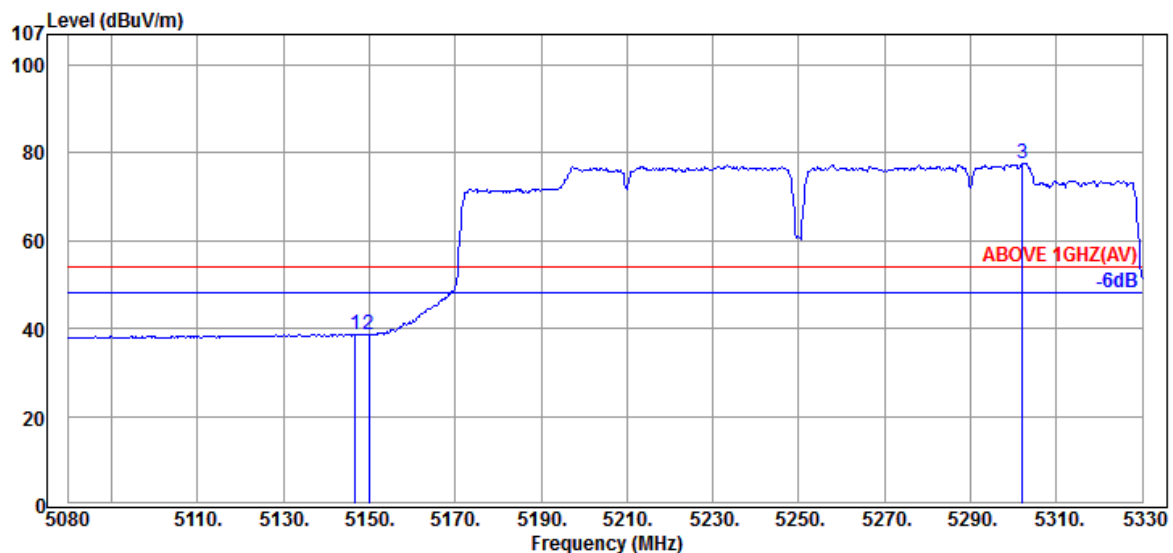

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.75	34.70	10.61	-6.58	38.73	54.00	15.27	Average
5150.00	34.70	10.61	-6.74	38.57	54.00	15.43	Average
@ 5302.00	34.60	10.72	32.31	77.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

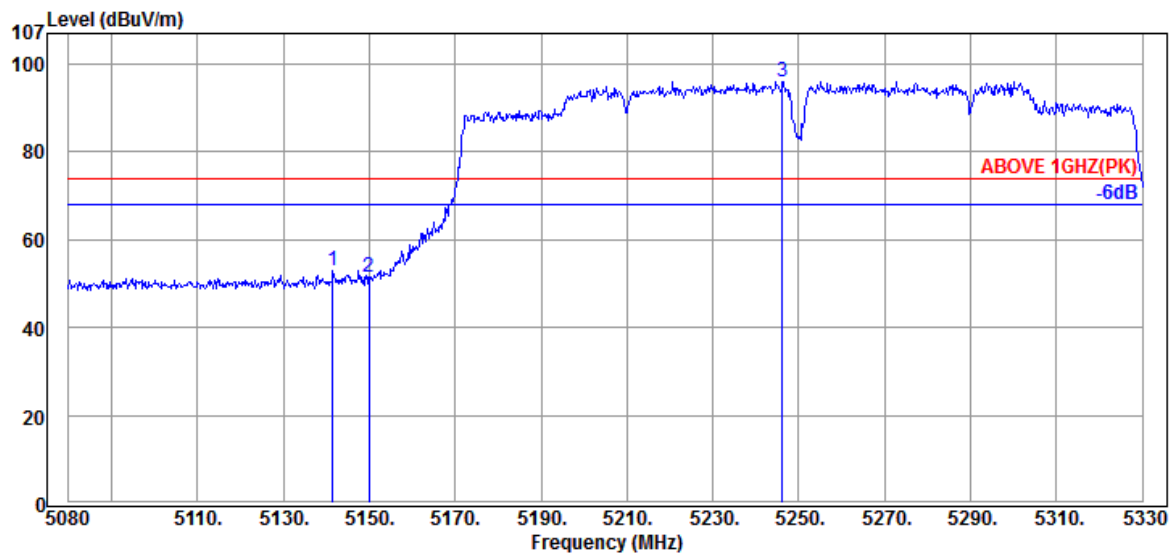

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.50	34.70	10.61	7.58	52.89	74.00	21.11	Peak
5150.00	34.70	10.61	6.31	51.62	74.00	22.38	Peak
@ 5246.25	34.50	10.68	50.93	96.11	---	---	Peak

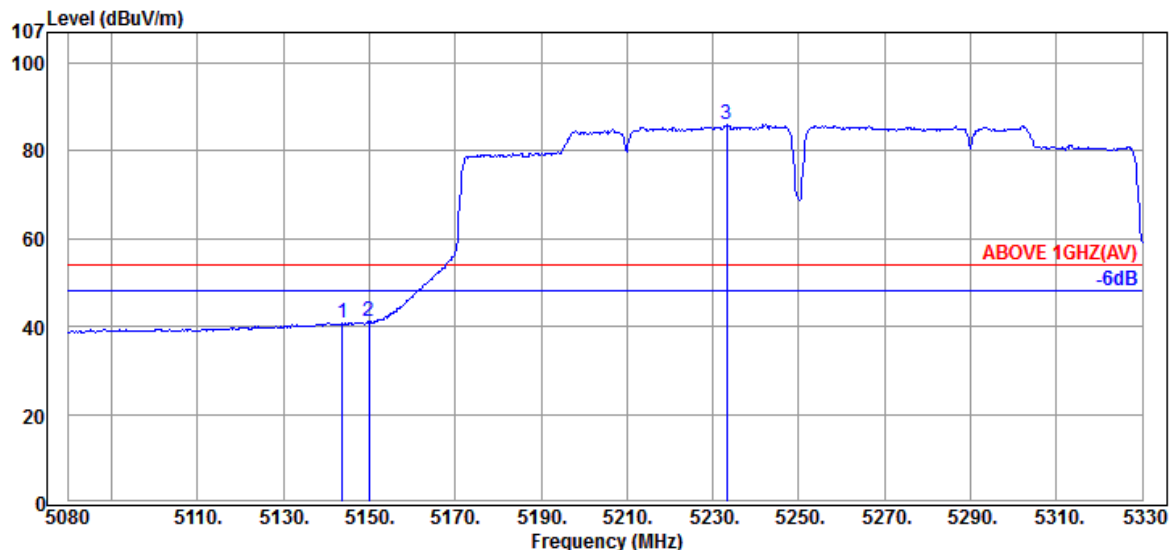

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.75	34.70	10.61	-4.36	40.95	54.00	13.05	Average
5150.00	34.70	10.61	-4.26	41.05	54.00	12.95	Average
@ 5233.25	34.50	10.67	40.90	86.07	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

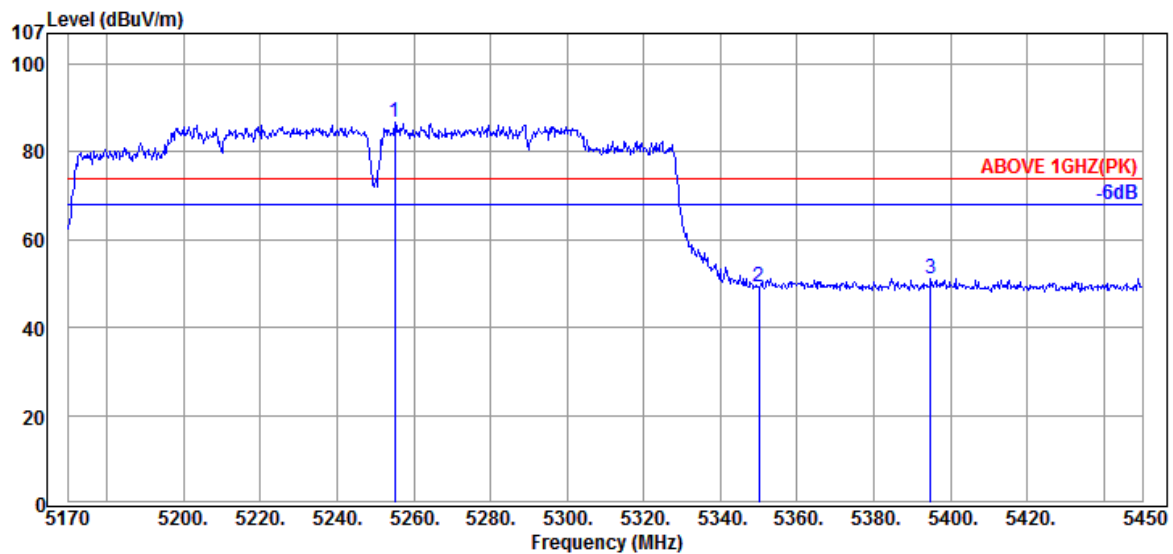

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5255.12	34.50	10.68	41.49	86.67	---	---	Peak
5350.00	34.80	10.76	3.82	49.38	74.00	24.62	Peak
5394.84	34.90	10.80	5.50	51.20	74.00	22.80	Peak

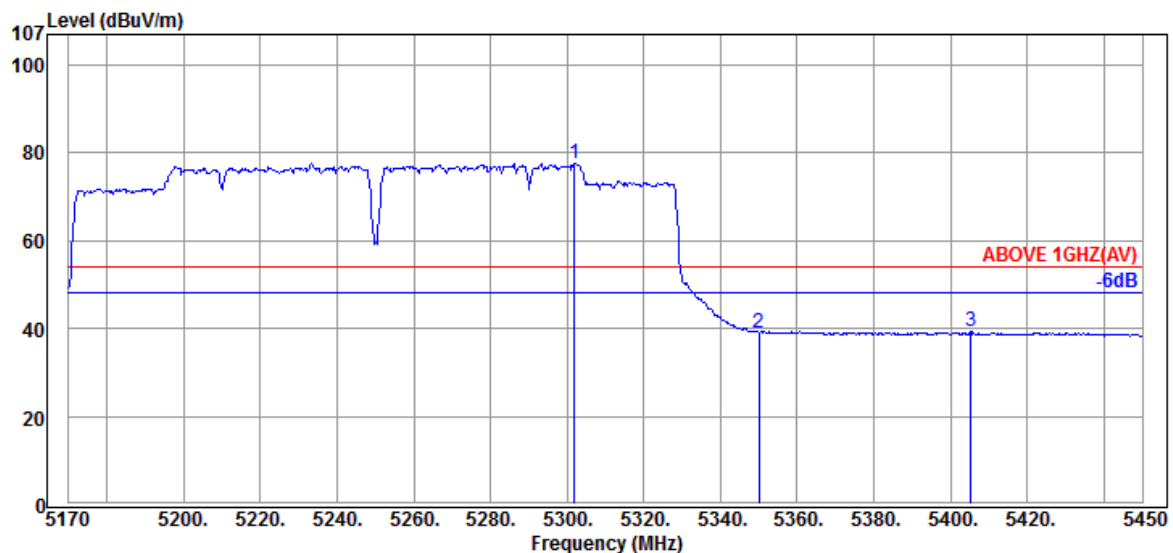

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.88	34.60	10.72	32.44	77.76	---	---	Average
5350.00	34.80	10.76	-6.59	38.97	54.00	15.03	Average
5405.20	34.90	10.80	-6.36	39.34	54.00	14.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

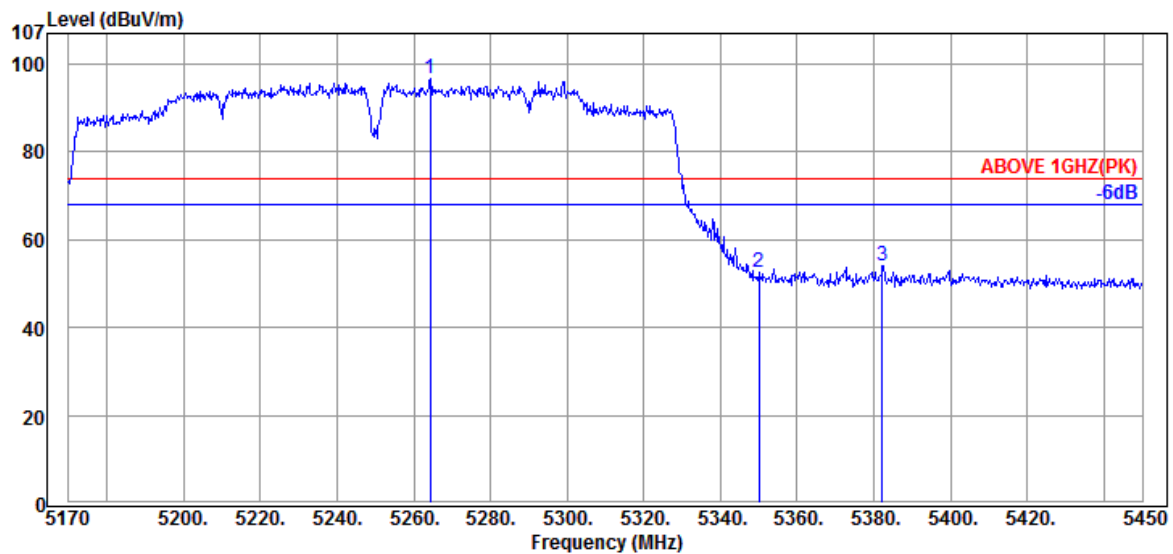

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5264.36	34.53	10.70	51.55	96.78	---	---	Peak
5350.00	34.80	10.76	7.09	52.65	74.00	21.35	Peak
5382.24	34.87	10.79	8.28	53.94	74.00	20.06	Peak

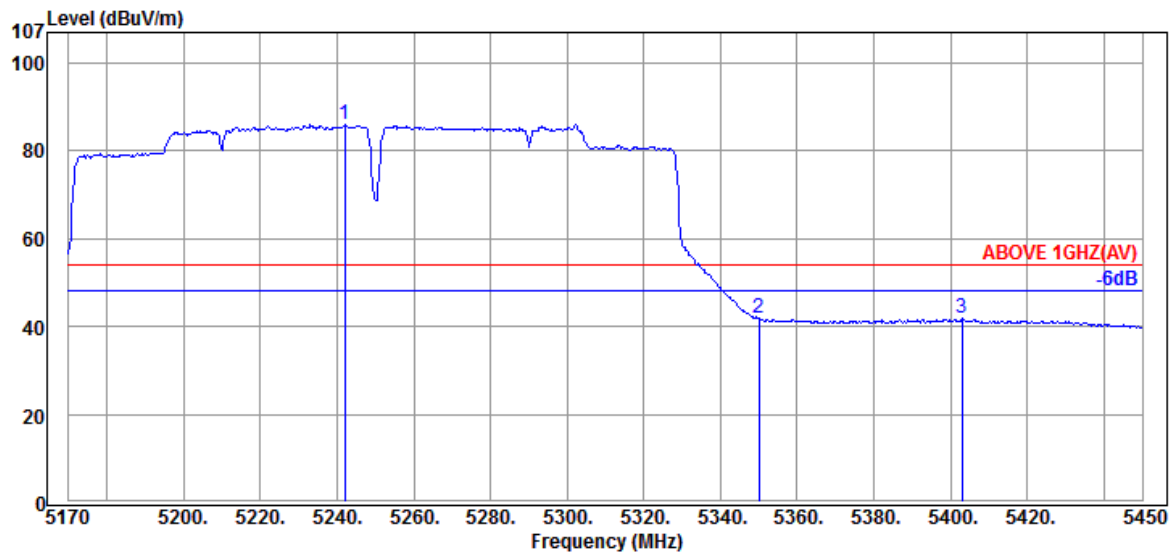

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5241.96	34.50	10.68	40.85	86.03	---	---	Average
5350.00	34.80	10.76	-3.80	41.76	54.00	12.24	Average
5402.96	34.90	10.80	-3.89	41.81	54.00	12.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

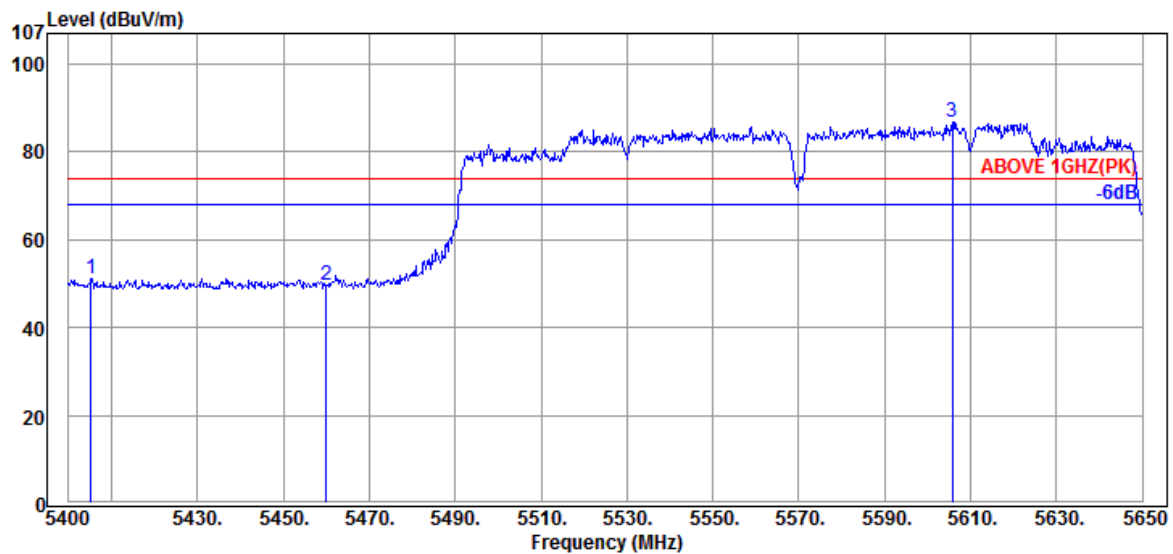

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5405.25	34.90	10.80	5.38	51.08	74.00	22.92	Peak
5460.00	34.70	10.84	4.21	49.75	74.00	24.25	Peak
@ 5605.75	34.90	10.89	40.86	86.65	---	---	Peak

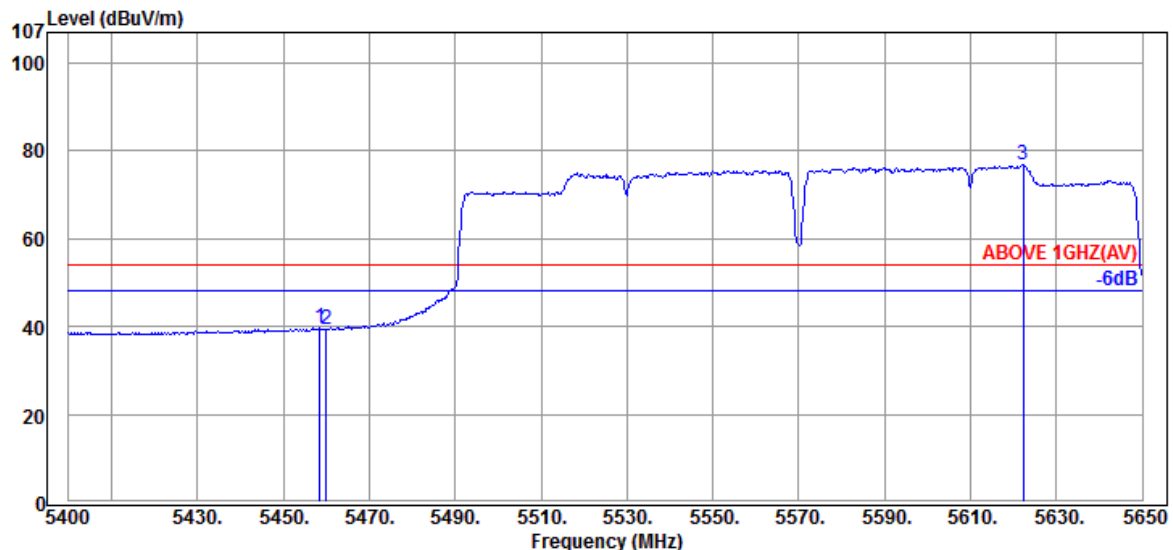

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.50	34.70	10.84	-5.84	39.70	54.00	14.30	Average
5460.00	34.70	10.84	-6.19	39.35	54.00	14.65	Average
@ 5622.25	34.87	10.89	31.12	76.88	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

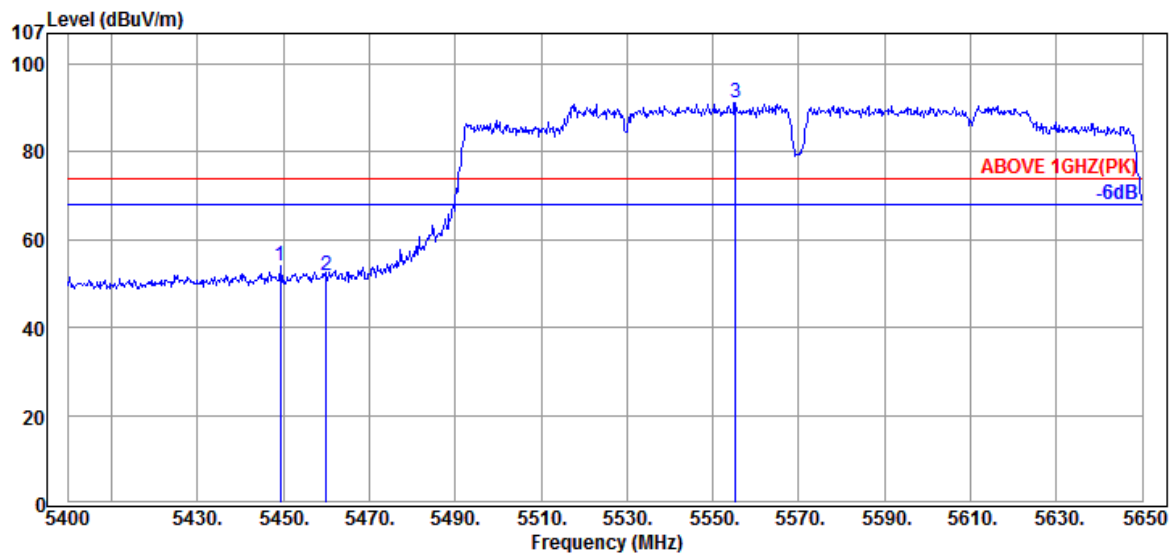

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5449.25	34.70	10.84	8.67	54.21	74.00	19.79	Peak
5460.00	34.70	10.84	6.13	51.67	74.00	22.33	Peak
@ 5555.25	34.70	10.89	45.54	91.13	---	---	Peak

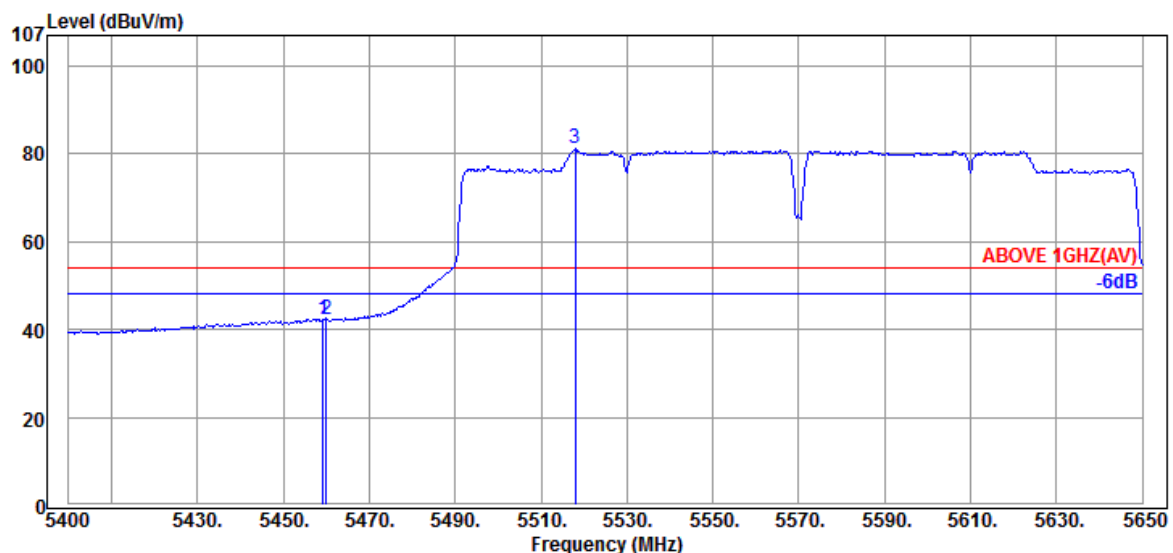

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.25	34.70	10.84	-3.13	42.41	54.00	11.59	Average
5460.00	34.70	10.84	-3.33	42.21	54.00	11.79	Average
@ 5518.00	34.63	10.88	35.60	81.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

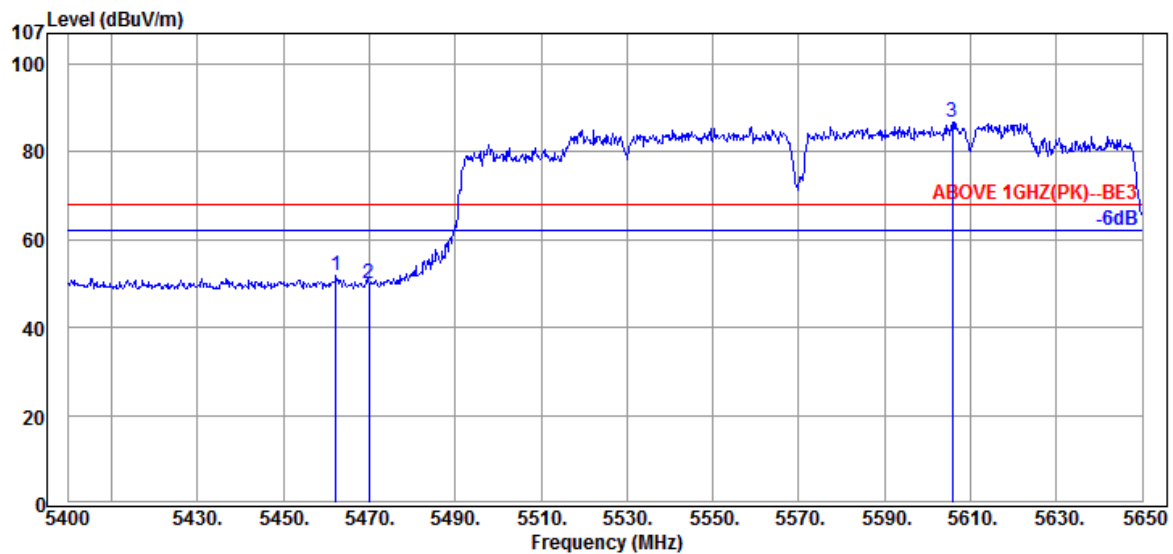

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.25	34.70	10.84	6.39	51.93	68.20	16.27	Peak
5470.00	34.67	10.85	4.38	49.90	68.20	18.30	Peak
@ 5605.75	34.90	10.89	40.86	86.65	---	---	Peak

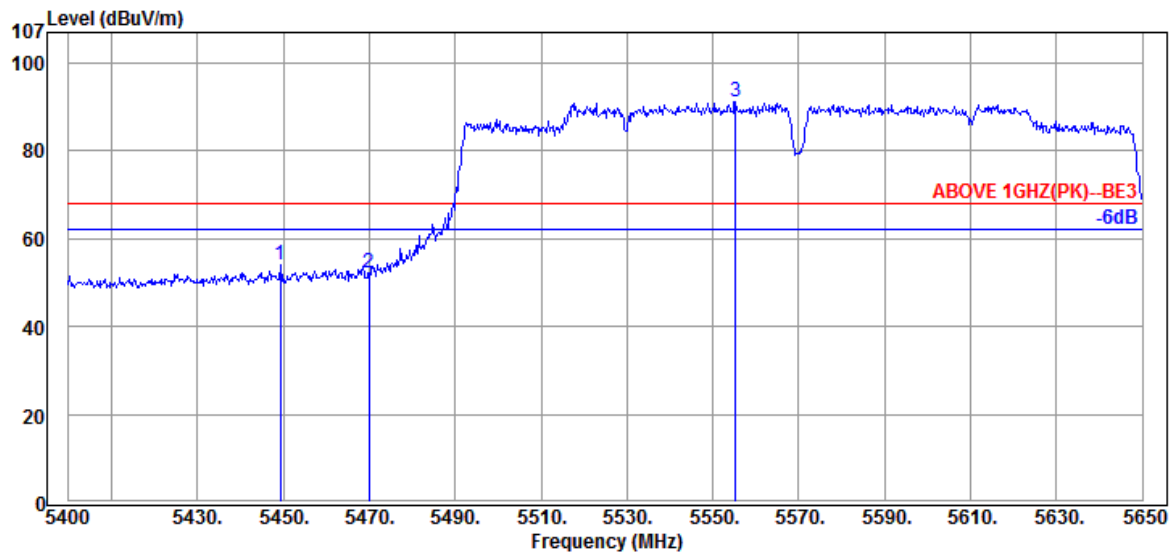

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.25	34.70	10.84	8.67	54.21	68.20	13.99	Peak
5470.00	34.67	10.85	6.63	52.15	68.20	16.05	Peak
@ 5555.25	34.70	10.89	45.54	91.13	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	II-2C
		Frequency	TX 5570MHz

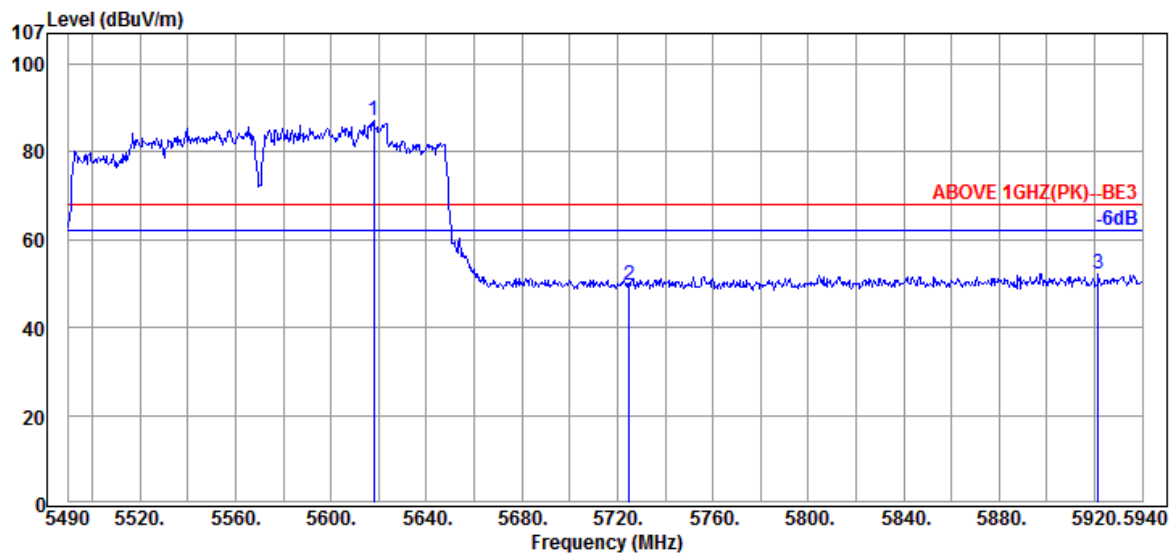

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5617.80	34.87	10.89	41.23	86.99	---	---	Peak
	5725.00	34.83	10.91	4.06	49.80	68.20	18.40	Peak
	5921.55	35.73	10.93	5.65	52.31	68.20	15.89	Peak

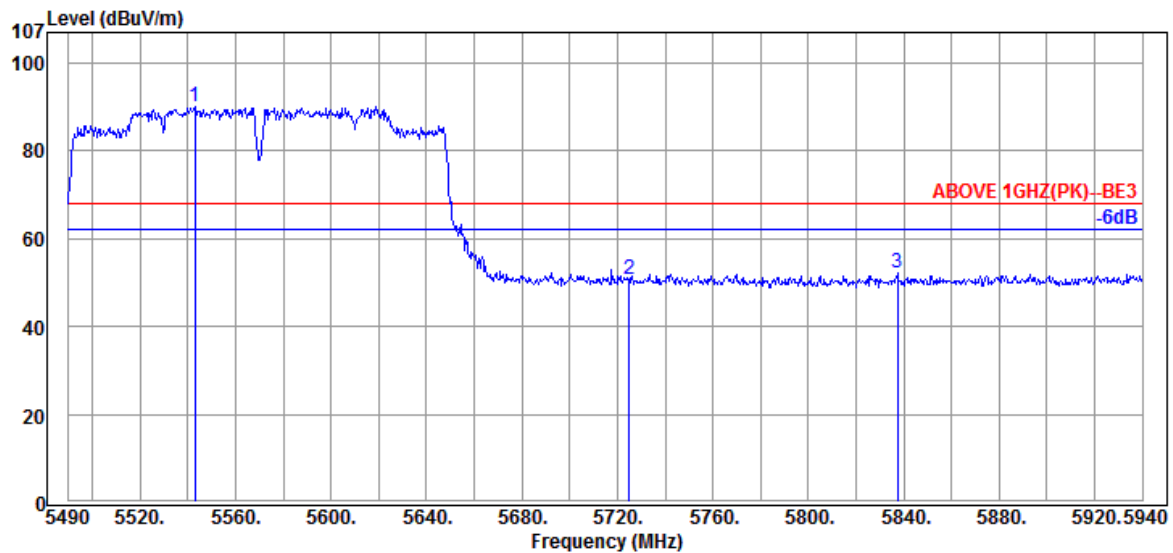

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5543.10	34.67	10.88	44.60	90.15	---	---	Peak
	5725.00	34.83	10.91	5.06	50.80	68.20	17.40	Peak
	5837.40	35.50	10.92	5.74	52.16	68.20	16.04	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
		Frequency	TX 5180MHz

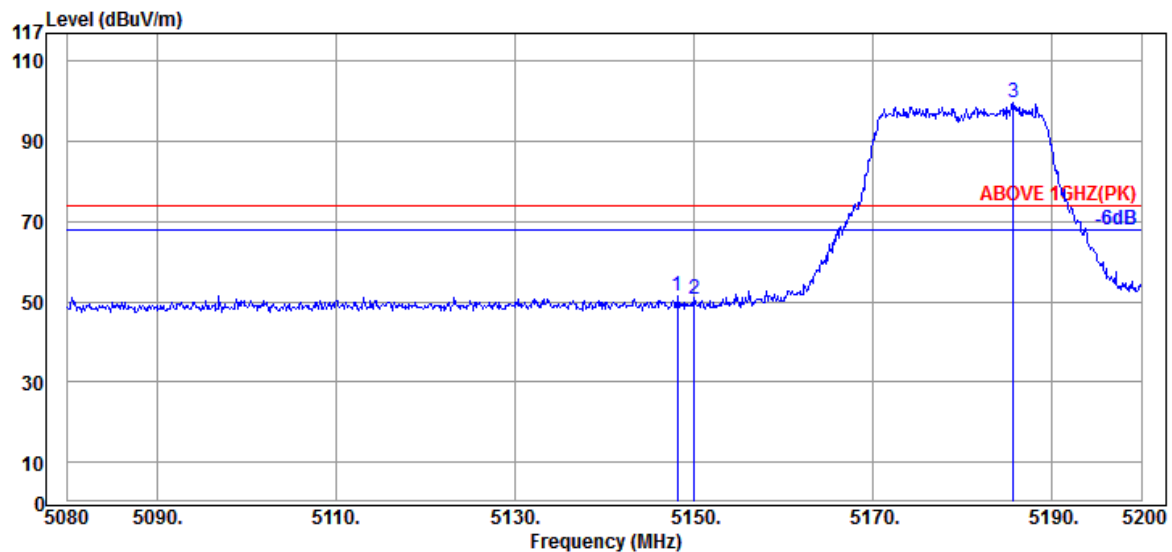

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.16	34.70	10.61	6.12	51.43	74.00	22.57	Peak
5150.00	34.70	10.61	5.27	50.58	74.00	23.42	Peak
@ 5185.72	34.57	10.63	54.34	99.54	---	---	Peak

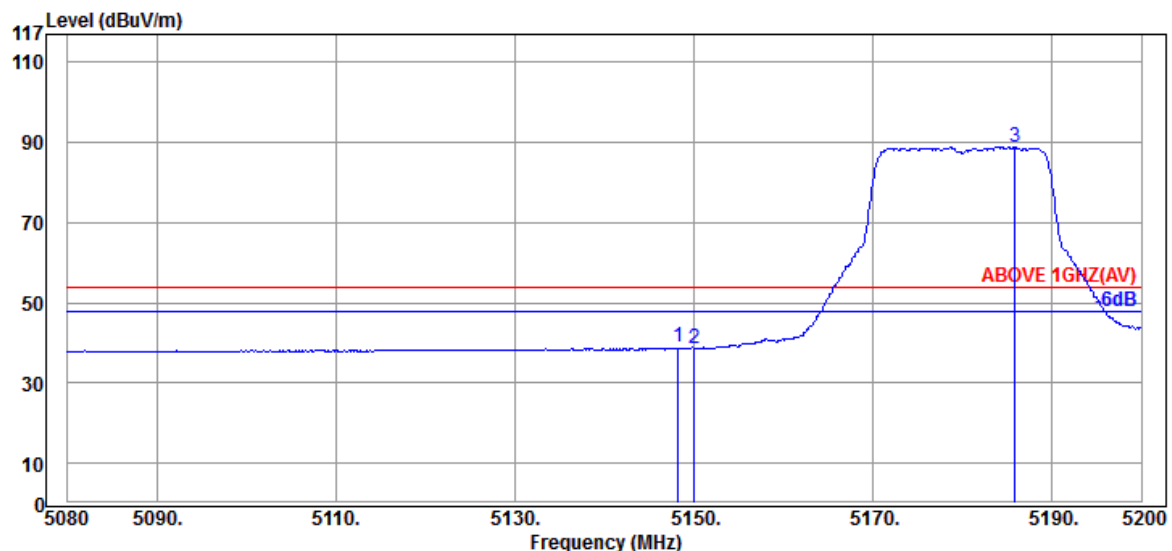

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.28	34.70	10.61	-6.51	38.80	54.00	15.20	Average
5150.00	34.70	10.61	-6.54	38.77	54.00	15.23	Average
@ 5185.84	34.57	10.63	43.77	88.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
		Frequency	TX 5180MHz

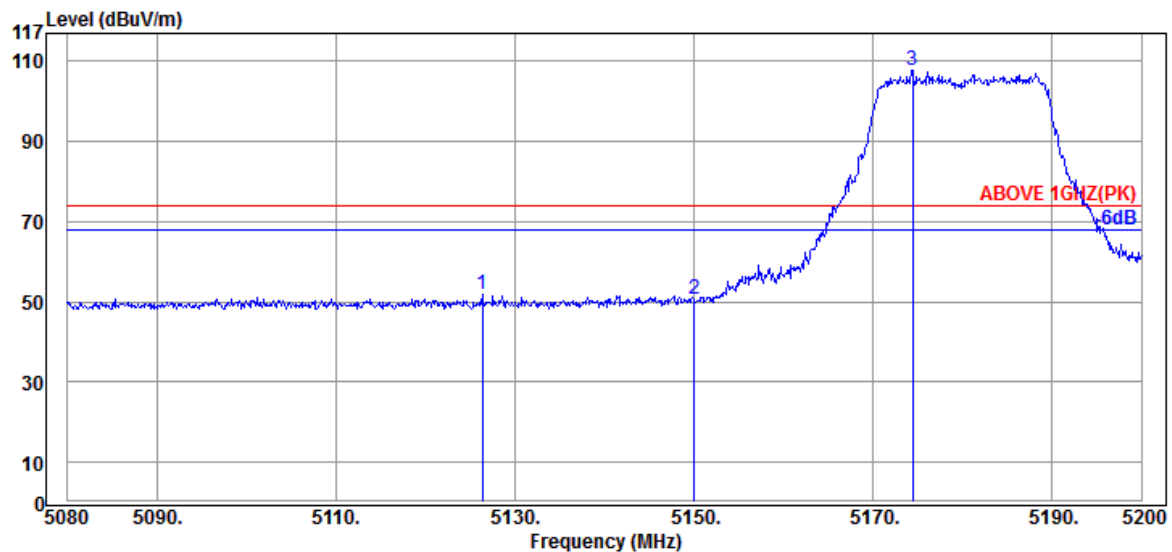

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.32	34.63	10.59	6.49	51.71	74.00	22.29	Peak
5150.00	34.70	10.61	5.28	50.59	74.00	23.41	Peak
@ 5174.44	34.57	10.63	62.45	107.65	---	---	Peak

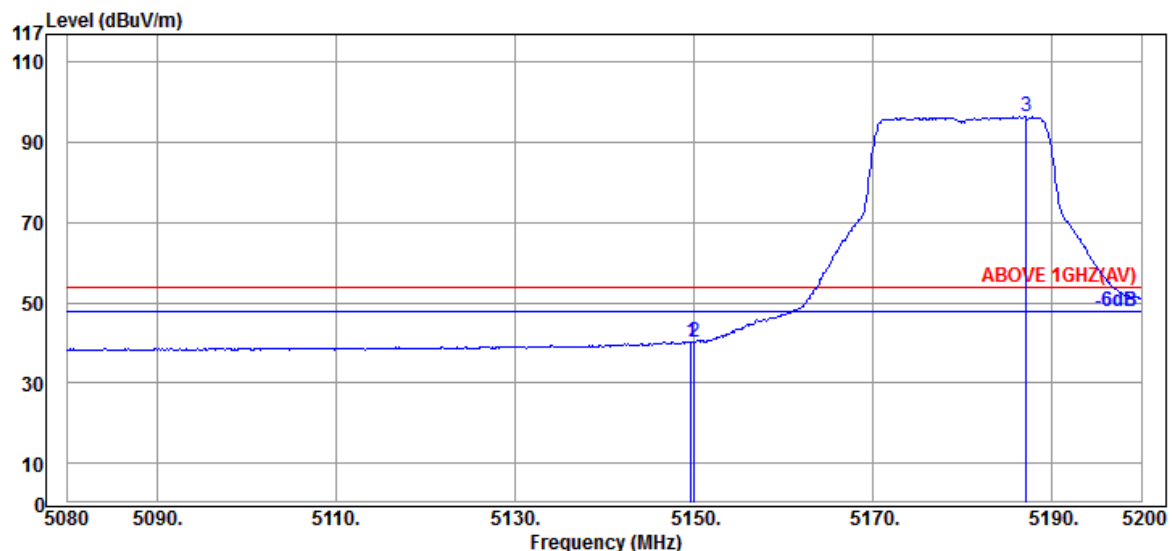

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.72	34.70	10.61	-4.98	40.33	54.00	13.67	Average
5150.00	34.70	10.61	-5.04	40.27	54.00	13.73	Average
@ 5187.16	34.57	10.63	51.30	96.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
		Frequency	TX 5320MHz

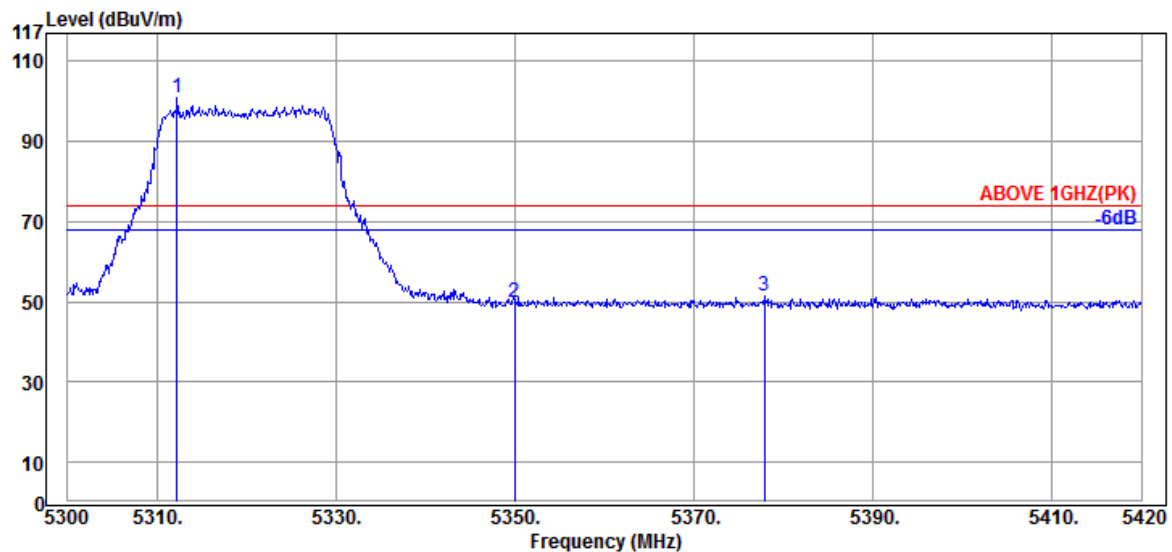

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.24	34.67	10.74	55.43	100.84	---	---	Peak
5350.00	34.80	10.76	4.30	49.86	74.00	24.14	Peak
5377.88	34.87	10.79	5.74	51.40	74.00	22.60	Peak

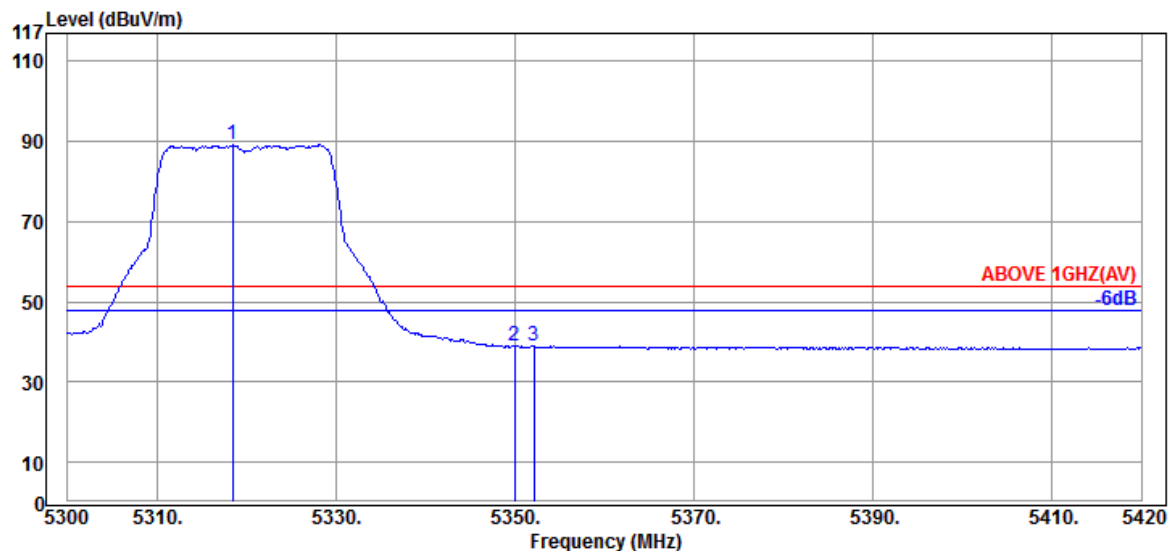

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.48	34.67	10.74	43.72	89.13	---	---	Average
5350.00	34.80	10.76	-6.69	38.87	54.00	15.13	Average
5352.08	34.80	10.76	-6.65	38.91	54.00	15.09	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
		Frequency	TX 5320MHz

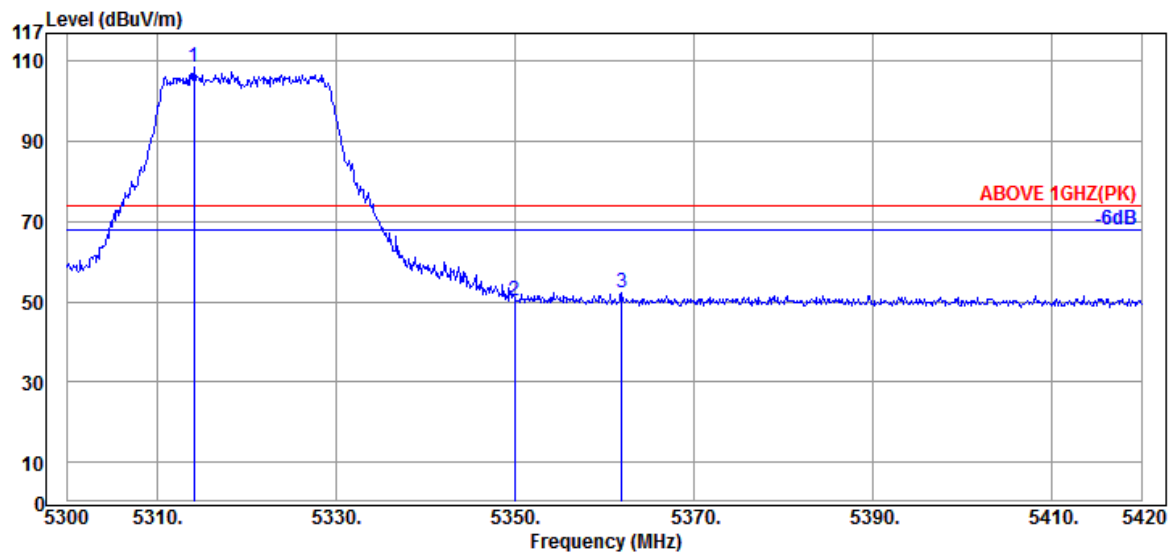

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.16	34.67	10.74	63.17	108.58	---	---	Peak
5350.00	34.80	10.76	4.87	50.43	74.00	23.57	Peak
5361.92	34.83	10.78	6.75	52.36	74.00	21.64	Peak

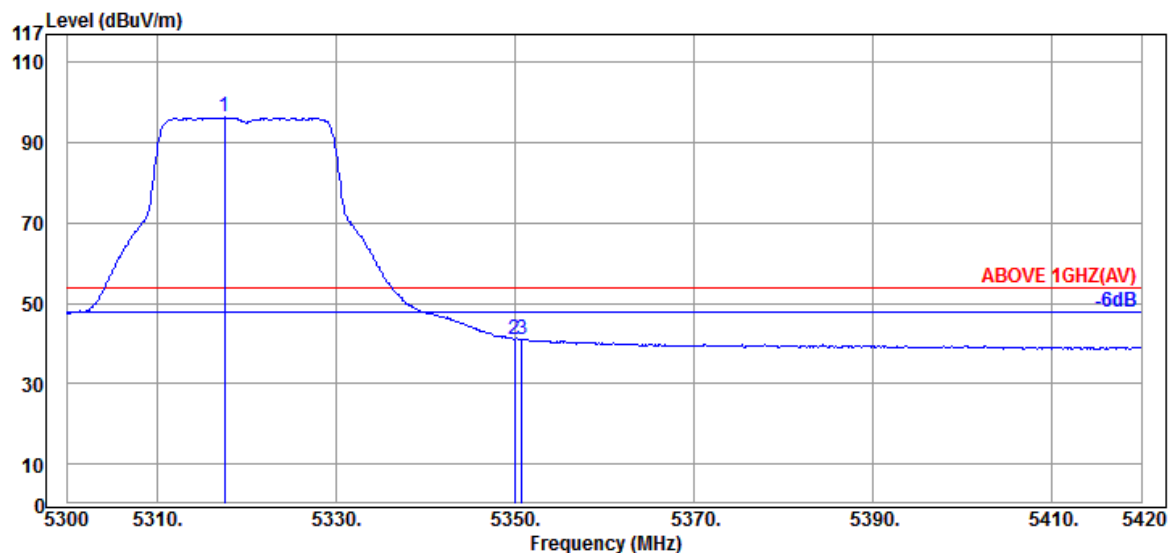

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.52	34.67	10.74	50.88	96.29	---	---	Average
5350.00	34.80	10.76	-4.51	41.05	54.00	12.95	Average
5350.76	34.80	10.76	-4.49	41.07	54.00	12.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5500MHz

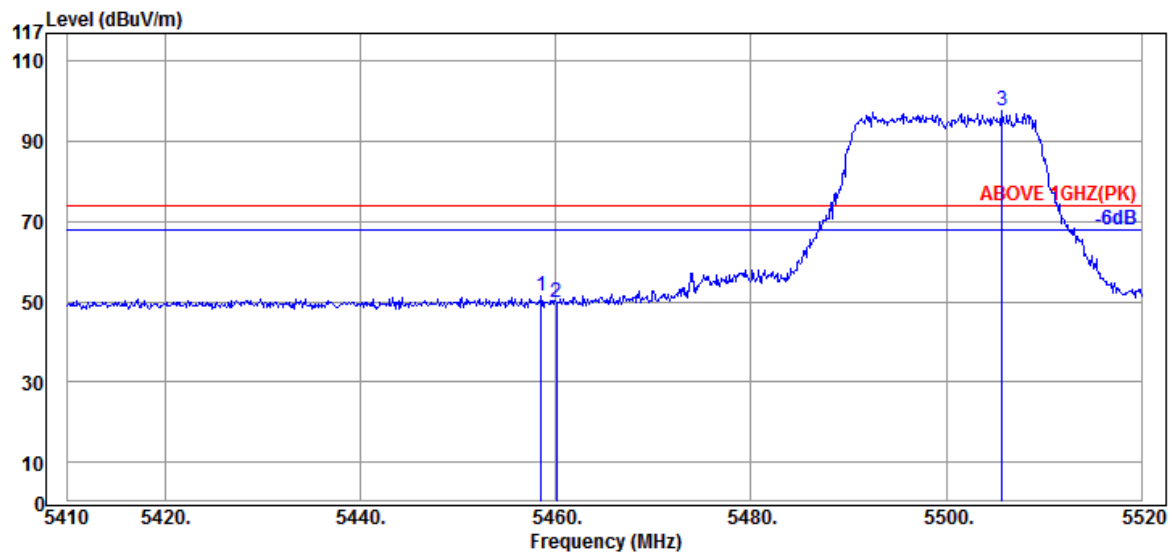

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.51	34.70	10.84	6.04	51.58	74.00	22.42	Peak
5460.05	34.70	10.84	4.46	50.00	74.00	24.00	Peak
@ 5505.70	34.60	10.88	52.23	97.71	---	---	Peak

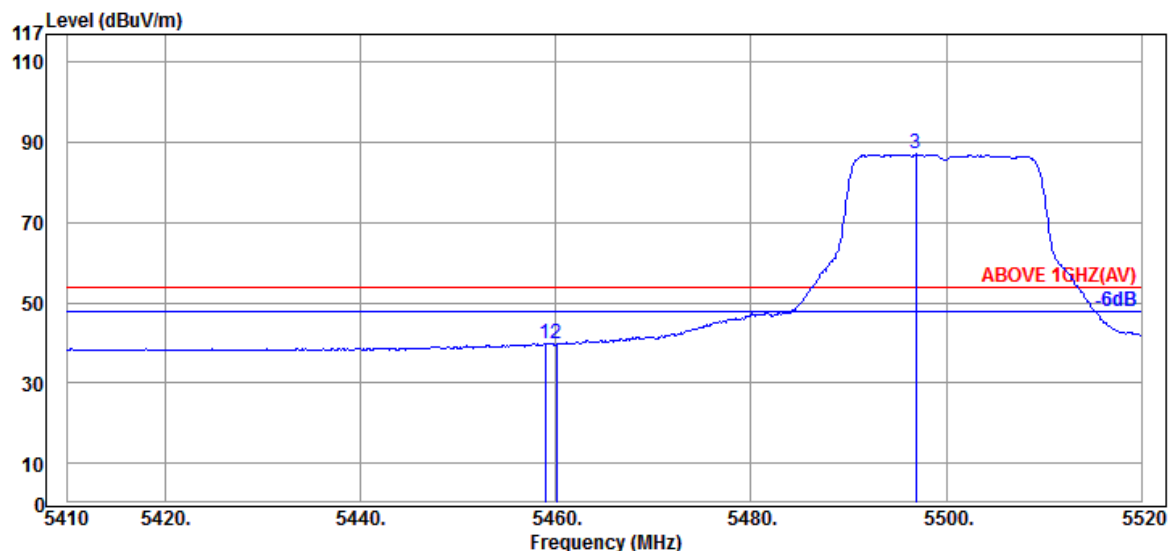

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.95	34.70	10.84	-5.64	39.90	54.00	14.10	Average
5460.05	34.70	10.84	-5.81	39.73	54.00	14.27	Average
@ 5496.90	34.60	10.88	41.58	87.06	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5500MHz

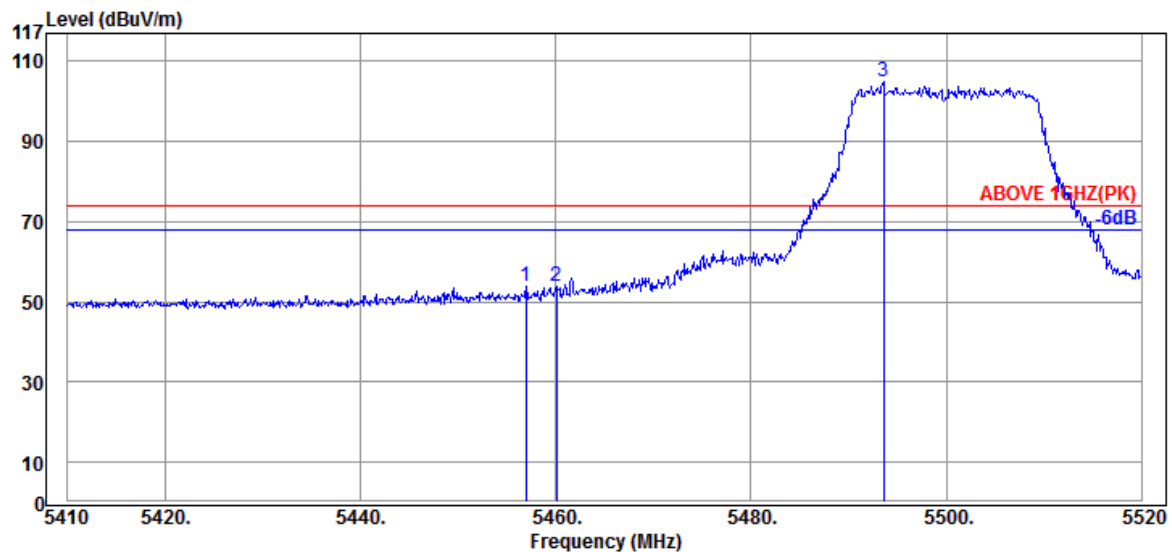

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.97	34.70	10.84	8.40	53.94	74.00	20.06	Peak
5460.05	34.70	10.84	8.24	53.78	74.00	20.22	Peak
@ 5493.60	34.63	10.87	59.24	104.74	---	---	Peak

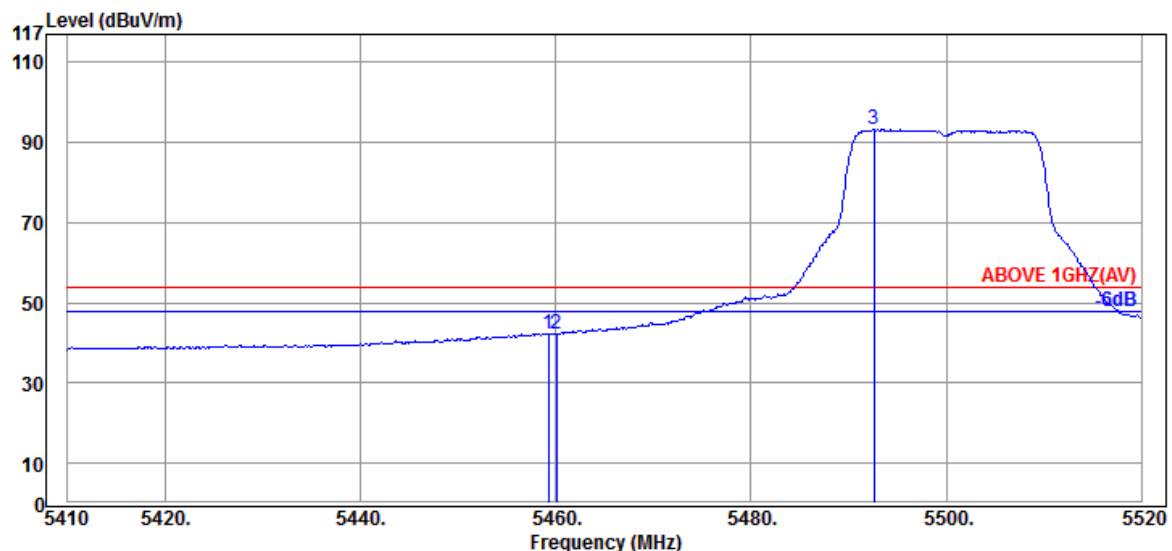

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.28	34.70	10.84	-3.16	42.38	54.00	11.62	Average
5460.05	34.70	10.84	-3.49	42.05	54.00	11.95	Average
@ 5492.61	34.63	10.87	47.85	93.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5500MHz

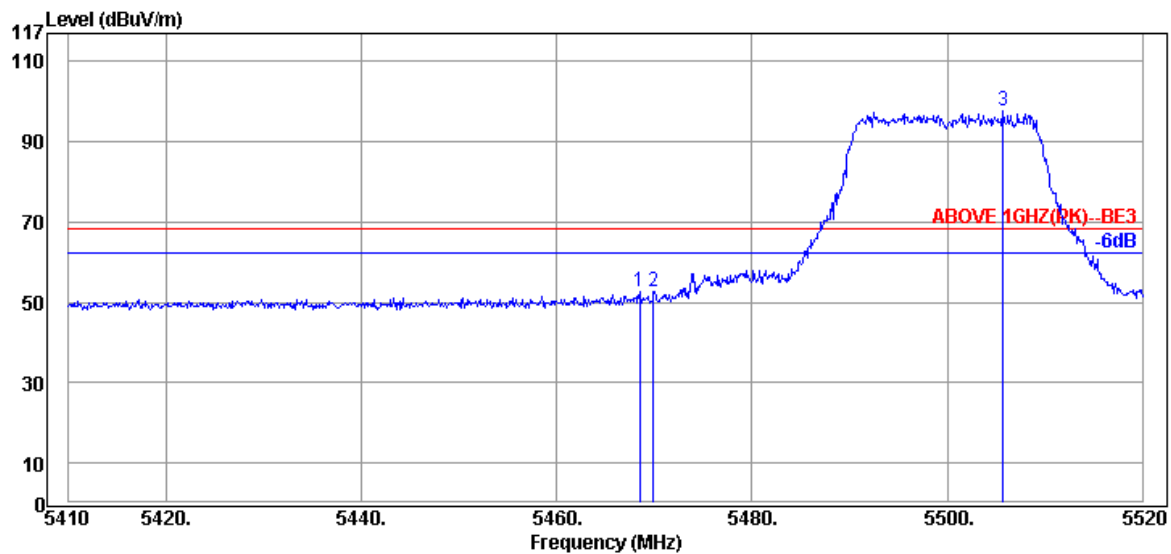

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.52	34.67	10.85	7.04	52.56	68.20	15.64	Peak
5469.95	34.67	10.85	7.22	52.74	68.20	15.46	Peak
@ 5505.70	34.60	10.88	52.23	97.71	---	---	Peak

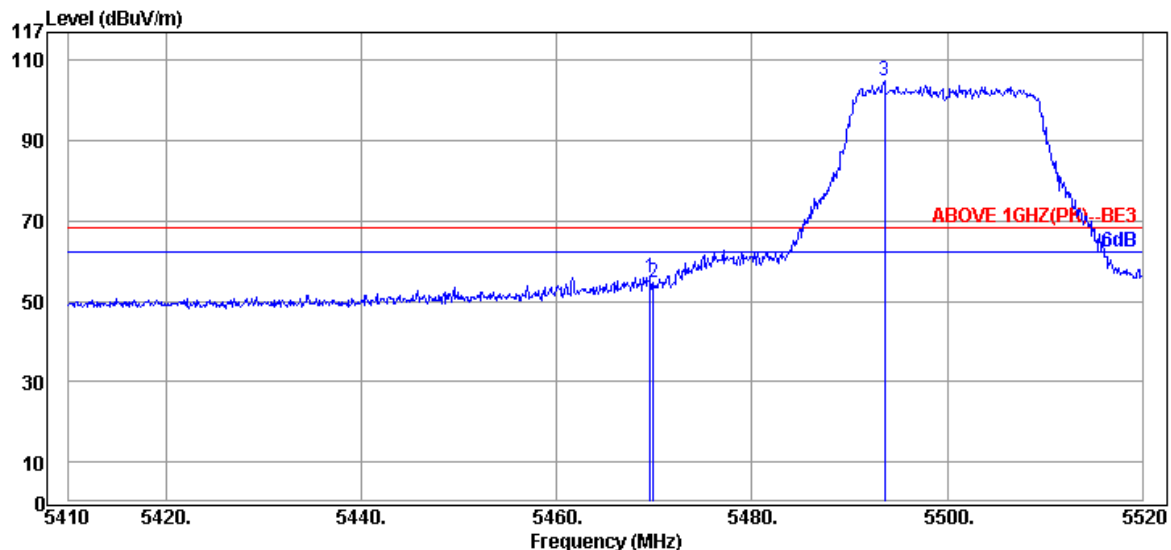

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.62	34.67	10.85	10.54	56.06	68.20	12.14	Peak
5469.95	34.67	10.85	8.99	54.51	68.20	13.69	Peak
@ 5493.60	34.63	10.87	59.24	104.74	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5500MHz

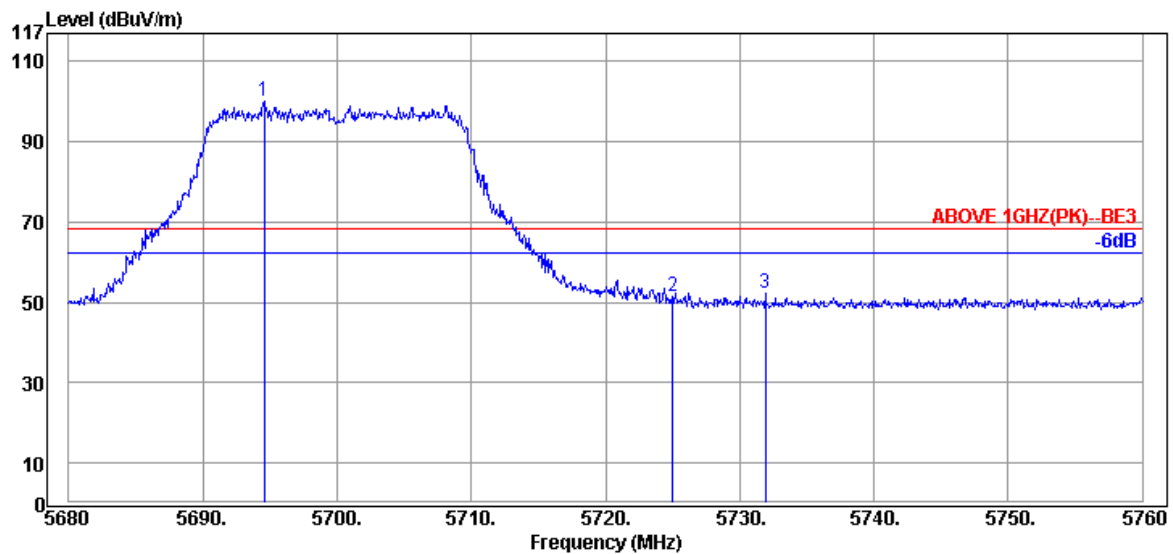

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5694.56	34.90	10.90	54.29	100.09	---	---	Peak
	5725.00	34.83	10.91	5.84	51.58	68.20	16.62	Peak
	5731.92	34.83	10.91	6.41	52.15	68.20	16.05	Peak

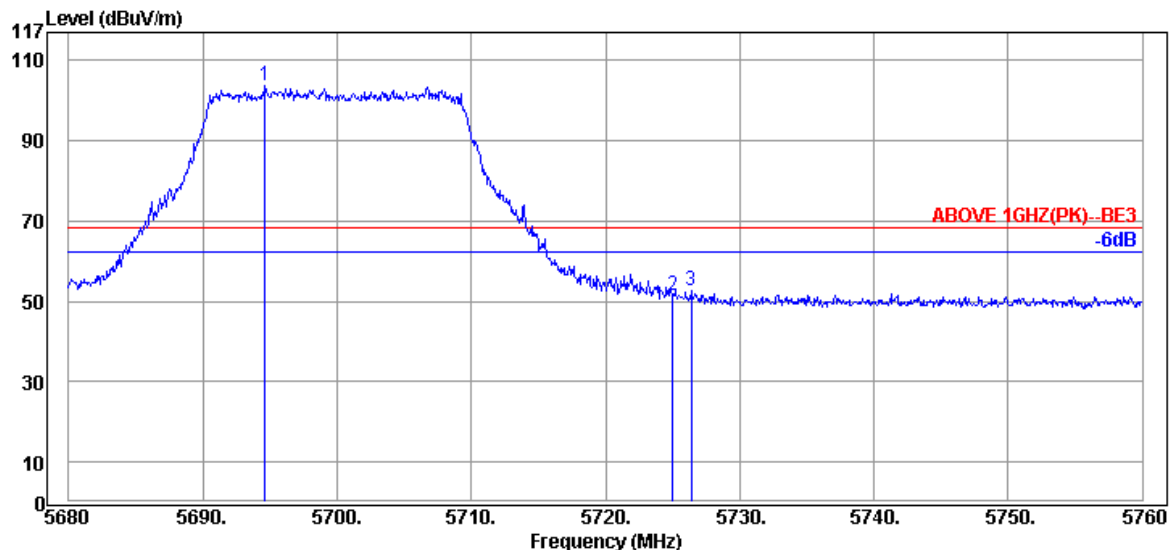

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5694.64	34.90	10.90	57.81	103.61	---	---	Peak
	5725.00	34.83	10.91	5.86	51.60	68.20	16.60	Peak
	5726.40	34.83	10.91	6.94	52.68	68.20	15.52	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5700MHz

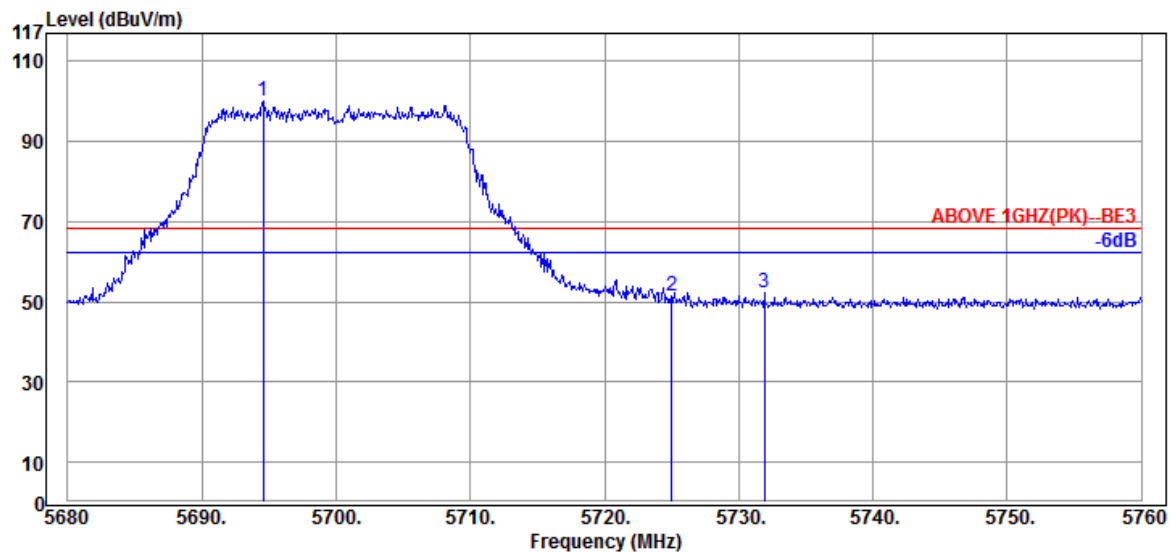

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5694.56	34.90	10.90	54.29	100.09	---	---	Peak
5725.00	34.83	10.91	5.84	51.58	68.20	16.62	Peak
5731.92	34.83	10.91	6.41	52.15	68.20	16.05	Peak

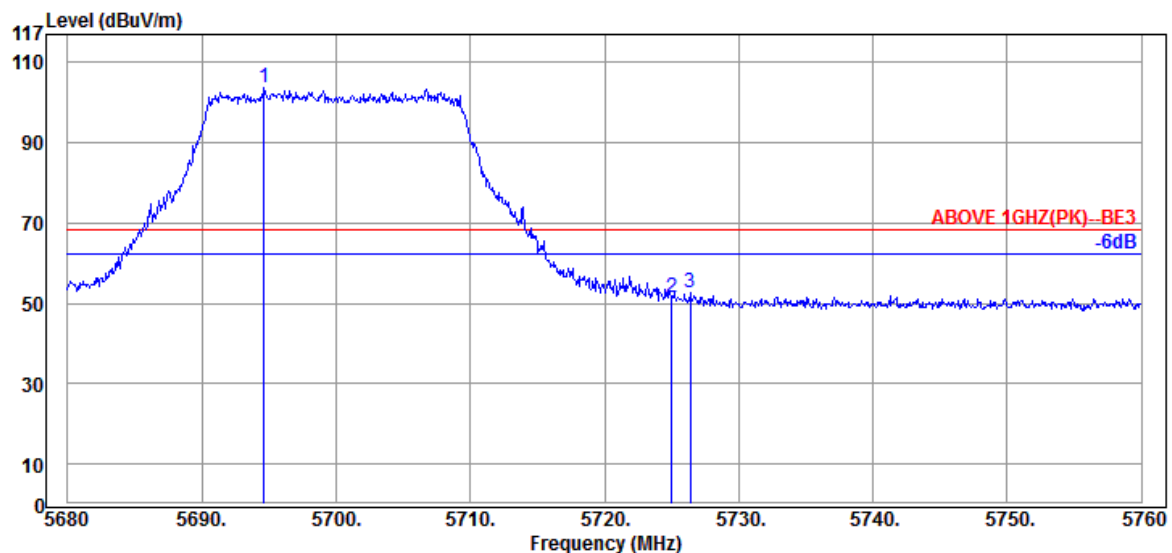

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5694.64	34.90	10.90	57.81	103.61	---	---	Peak
5725.00	34.83	10.91	5.86	51.60	68.20	16.60	Peak
5726.40	34.83	10.91	6.94	52.68	68.20	15.52	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5720MHz

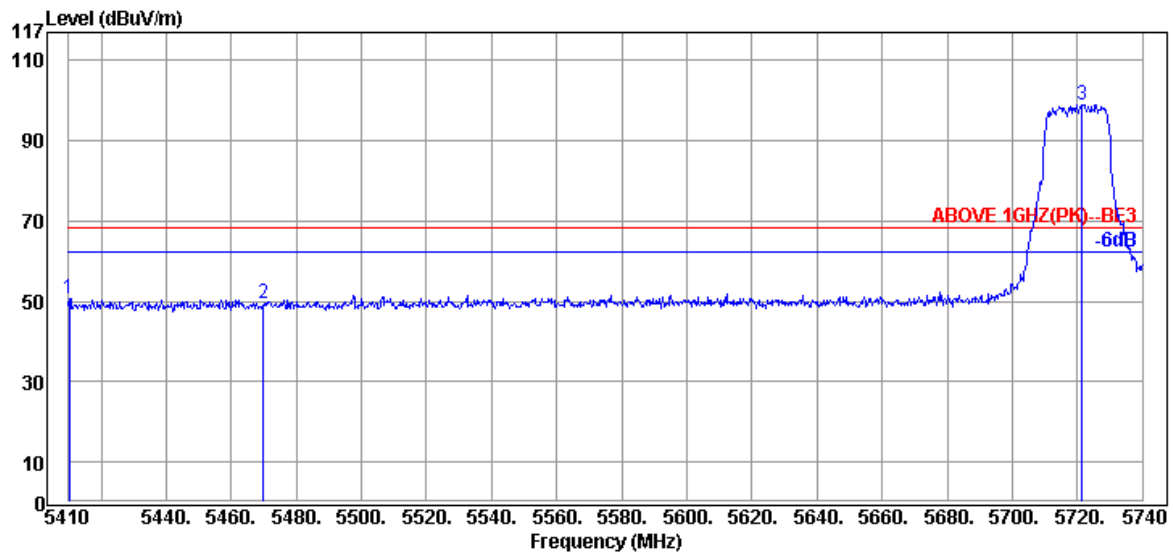

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.33	34.86	10.81	4.97	50.64	68.20	17.56	Peak
5470.00	34.66	10.86	3.83	49.35	68.20	18.85	Peak
@ 5721.52	34.86	10.91	53.27	99.04	---	---	Peak

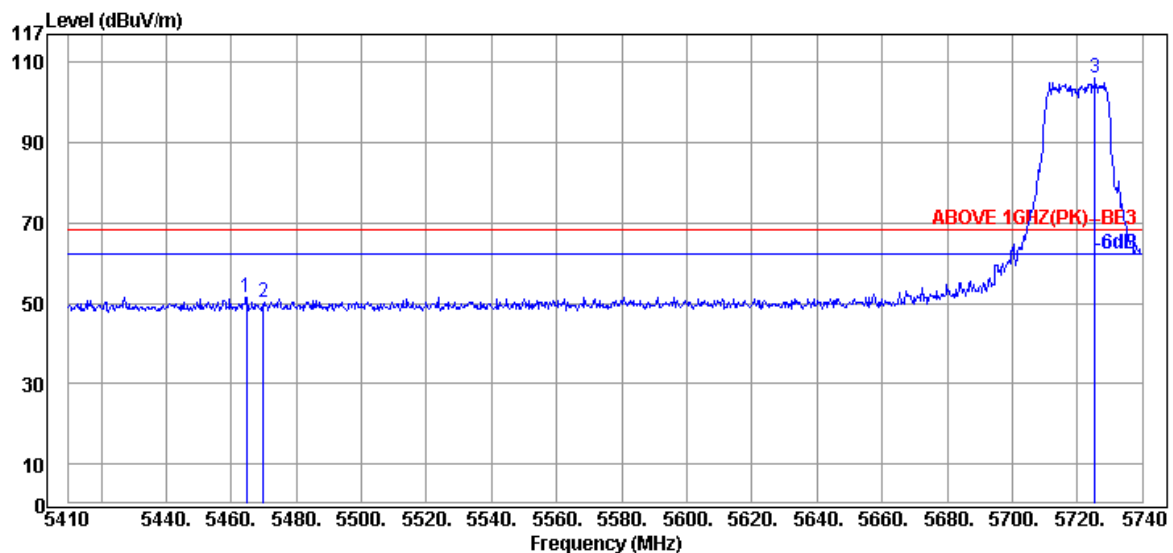

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.78	34.67	10.85	5.98	51.50	68.20	16.70	Peak
5470.00	34.66	10.86	4.65	50.17	68.20	18.03	Peak
@ 5725.48	34.85	10.91	60.19	105.95	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5720MHz

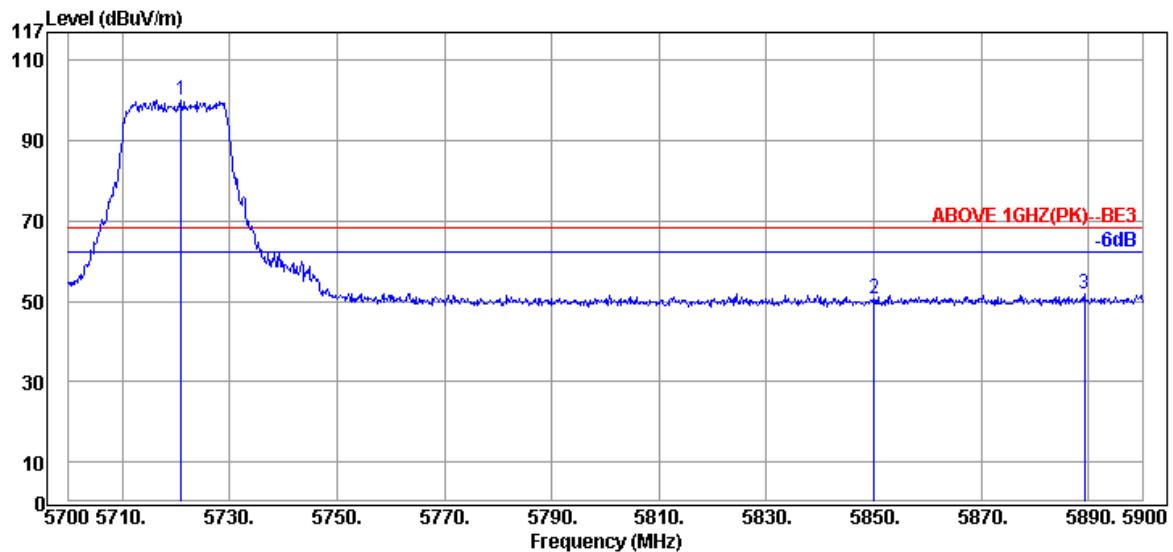

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.00	34.83	10.91	54.46	100.20	---	---	Peak
5850.00	35.50	10.92	4.16	50.58	68.20	17.62	Peak
5889.20	35.60	10.93	5.27	51.80	68.20	16.40	Peak

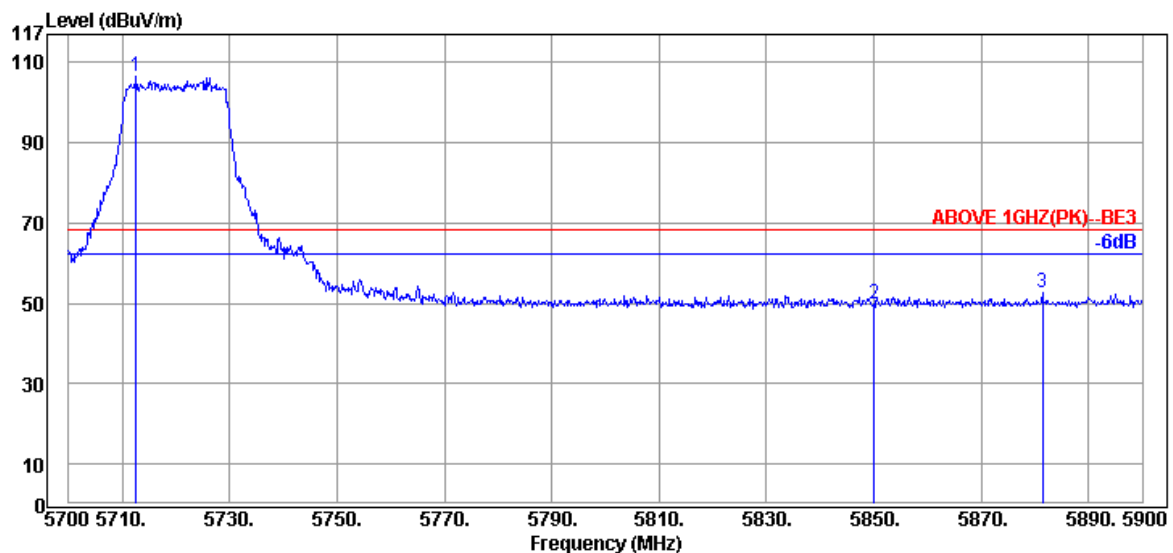

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.60	34.87	10.90	60.64	106.41	---	---	Peak
5850.00	35.50	10.92	3.51	49.93	68.20	18.27	Peak
5881.40	35.57	10.93	6.10	52.60	68.20	15.60	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
		Frequency	TX 5190MHz

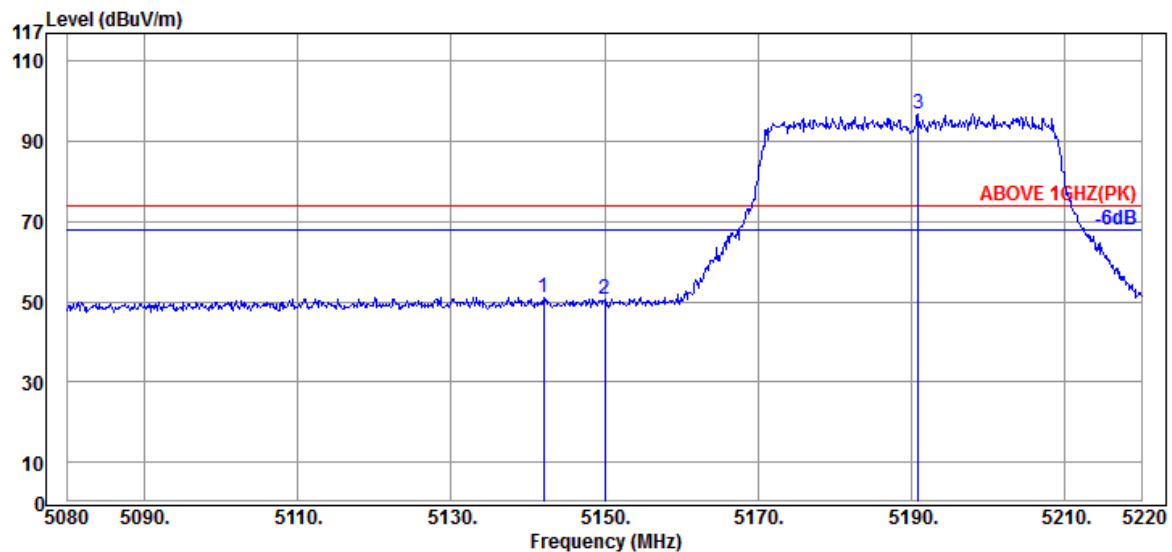

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.02	34.70	10.61	5.95	51.26	74.00	22.74	Peak
5150.00	34.70	10.61	5.31	50.62	74.00	23.38	Peak
@ 5190.88	34.50	10.65	51.90	97.05	---	---	Peak

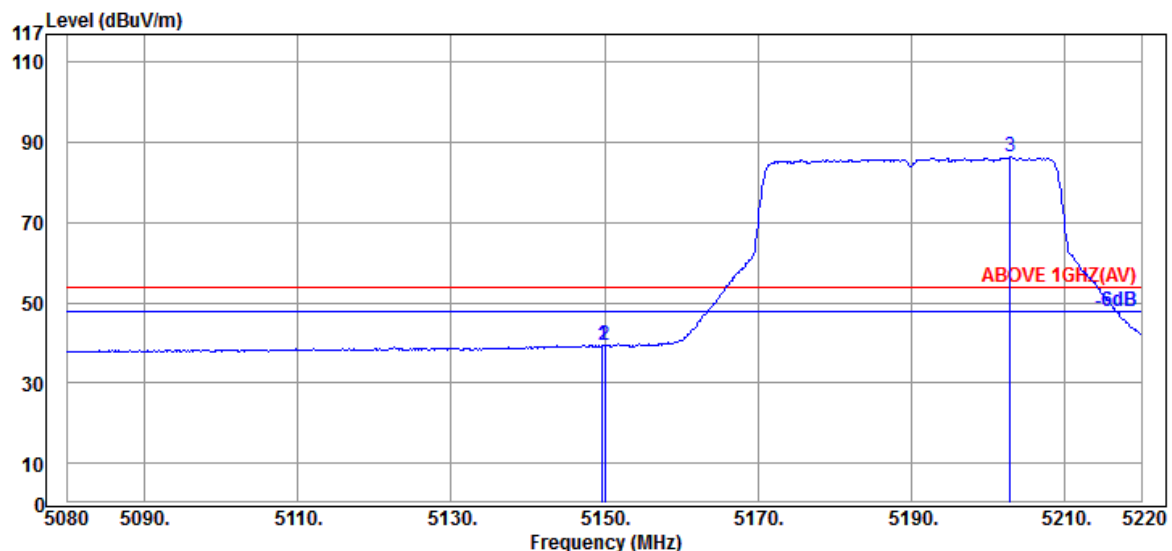

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.72	34.70	10.61	-5.90	39.41	54.00	14.59	Average
5150.00	34.70	10.61	-6.02	39.29	54.00	14.71	Average
@ 5202.92	34.50	10.65	41.33	86.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
		Frequency	TX 5190MHz

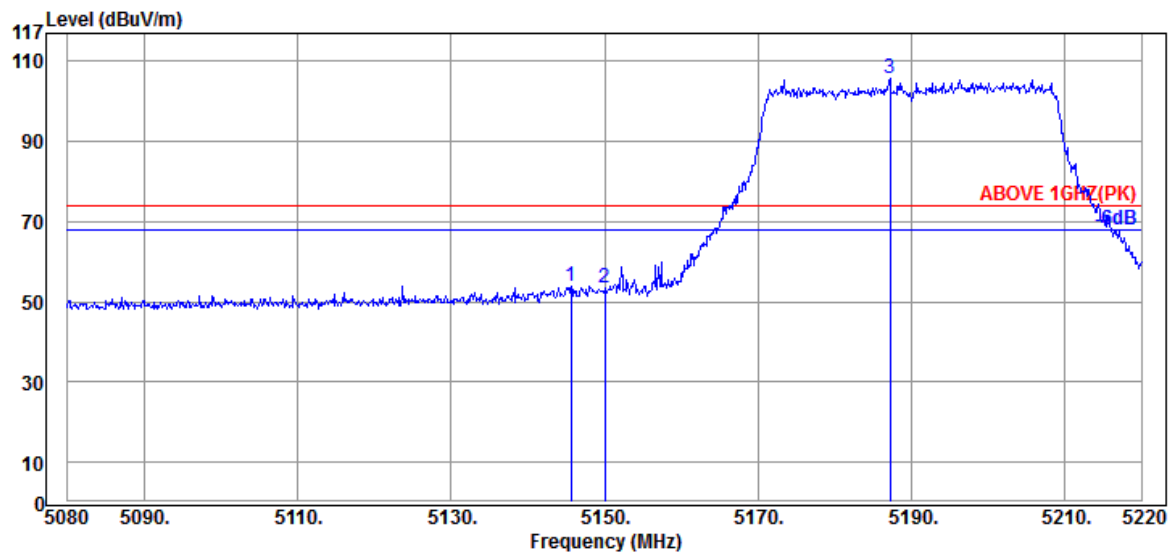

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.66	34.70	10.61	8.64	53.95	74.00	20.05	Peak
5150.00	34.70	10.61	8.08	53.39	74.00	20.61	Peak
@ 5187.24	34.57	10.63	60.40	105.60	---	---	Peak

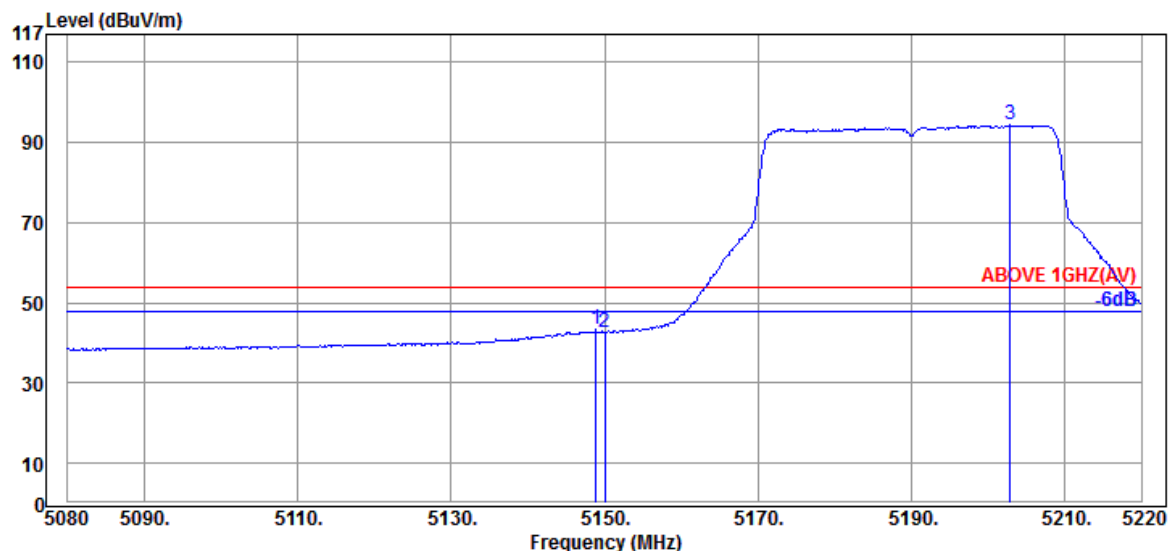

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.88	34.70	10.61	-1.90	43.41	54.00	10.59	Average
5150.00	34.70	10.61	-2.87	42.44	54.00	11.56	Average
@ 5202.92	34.50	10.65	49.16	94.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
		Frequency	TX 5310MHz

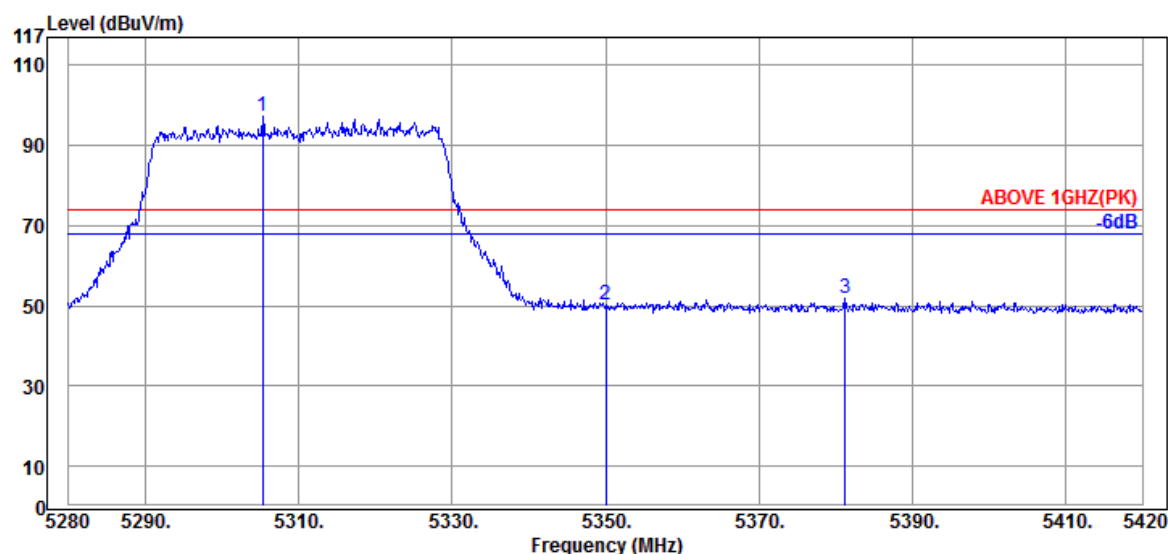

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.34	34.60	10.72	51.83	97.15	---	---	Peak
5350.00	34.80	10.76	4.61	50.17	74.00	23.83	Peak
5381.22	34.87	10.79	6.15	51.81	74.00	22.19	Peak

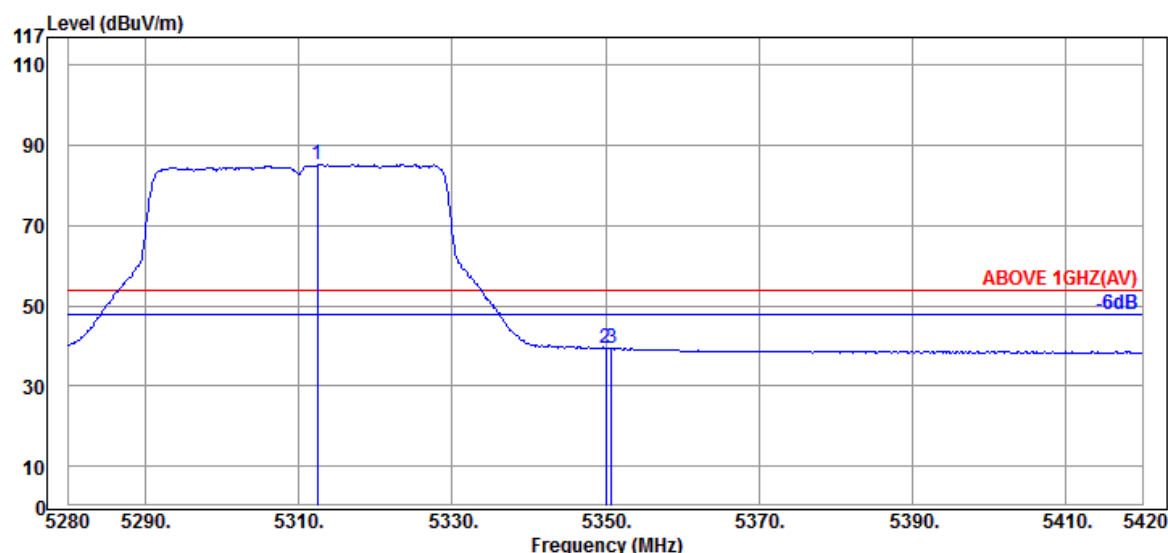

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.48	34.67	10.74	39.85	85.26	---	---	Average
5350.00	34.80	10.76	-6.05	39.51	54.00	14.49	Average
5350.84	34.80	10.76	-6.08	39.48	54.00	14.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
		Frequency	TX 5310MHz

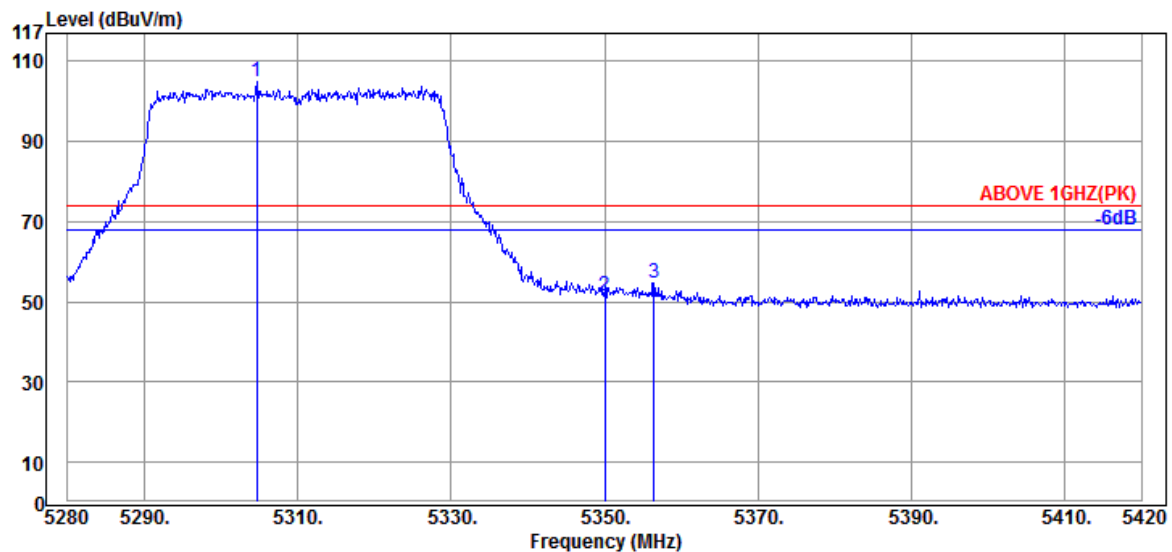

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.64	34.60	10.72	59.56	104.88	---	---	Peak
5350.00	34.80	10.76	5.88	51.44	74.00	22.56	Peak
5356.44	34.80	10.76	9.21	54.77	74.00	19.23	Peak

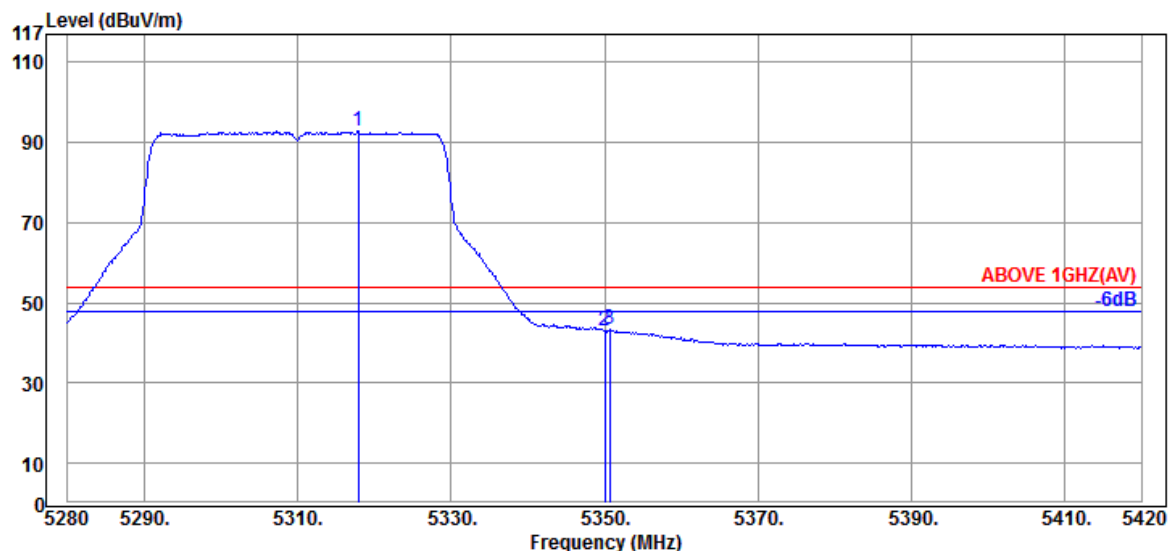

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.94	34.67	10.74	47.34	92.75	---	---	Average
5350.00	34.80	10.76	-2.48	43.08	54.00	10.92	Average
5350.70	34.80	10.76	-2.29	43.27	54.00	10.73	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5510MHz

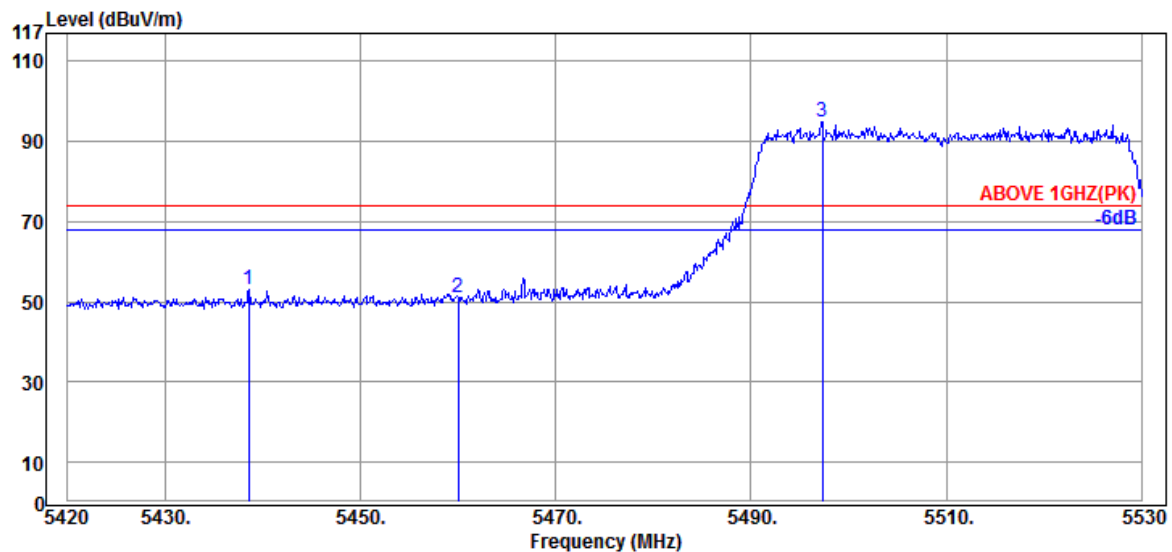

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.59	34.77	10.83	7.28	52.88	74.00	21.12	Peak
5460.04	34.70	10.84	5.39	50.93	74.00	23.07	Peak
@ 5497.33	34.60	10.88	49.58	95.06	---	---	Peak

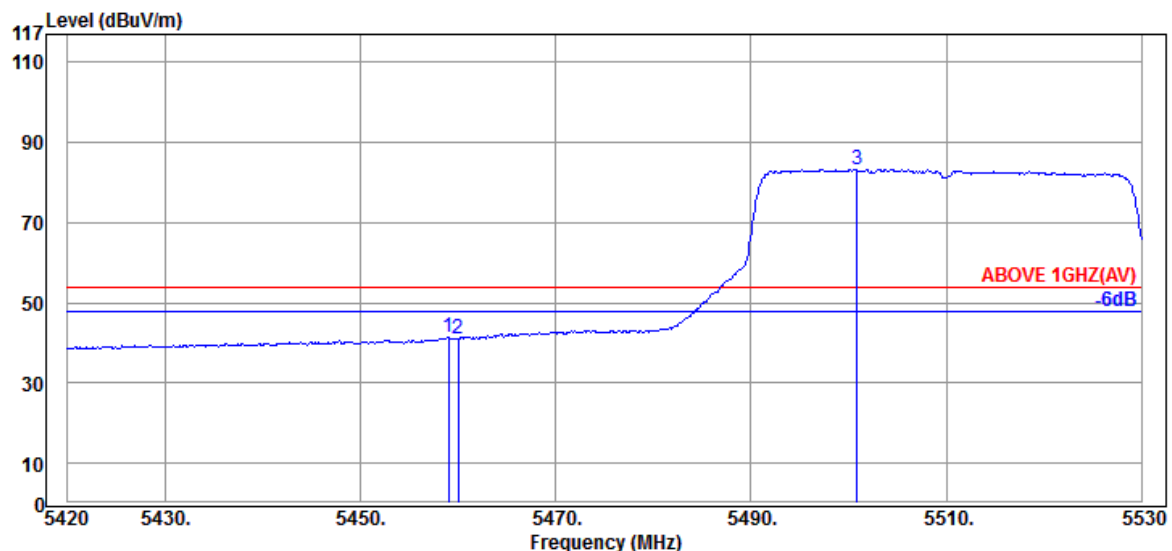

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.05	34.70	10.84	-4.22	41.32	54.00	12.68	Average
5460.04	34.70	10.84	-4.36	41.18	54.00	12.82	Average
@ 5500.85	34.60	10.88	37.72	83.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5510MHz

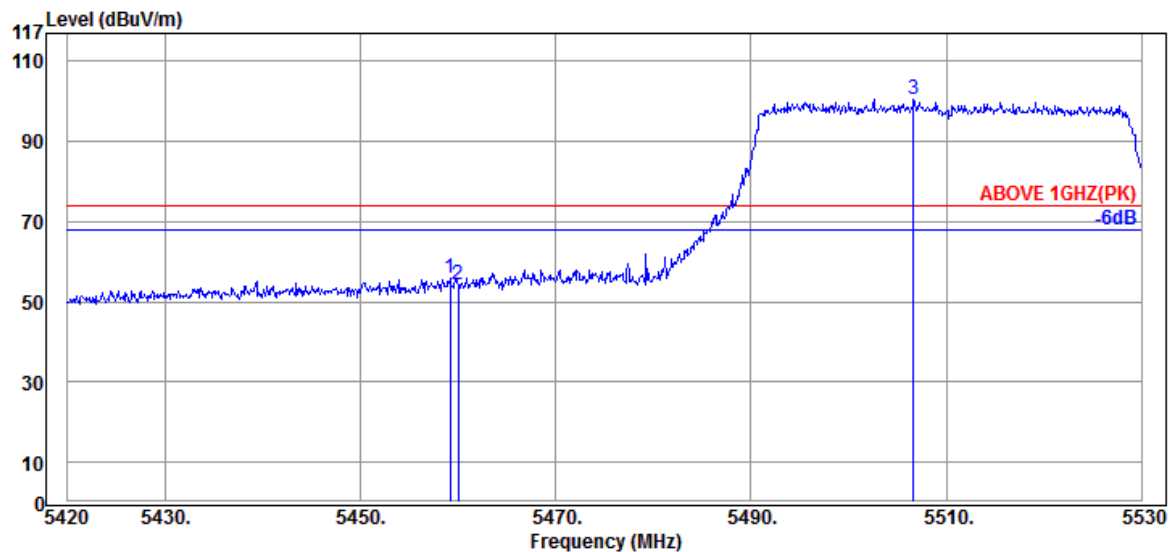

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.16	34.70	10.84	10.20	55.74	74.00	18.26	Peak
5460.04	34.70	10.84	8.65	54.19	74.00	19.81	Peak
@ 5506.68	34.60	10.88	54.89	100.37	---	---	Peak

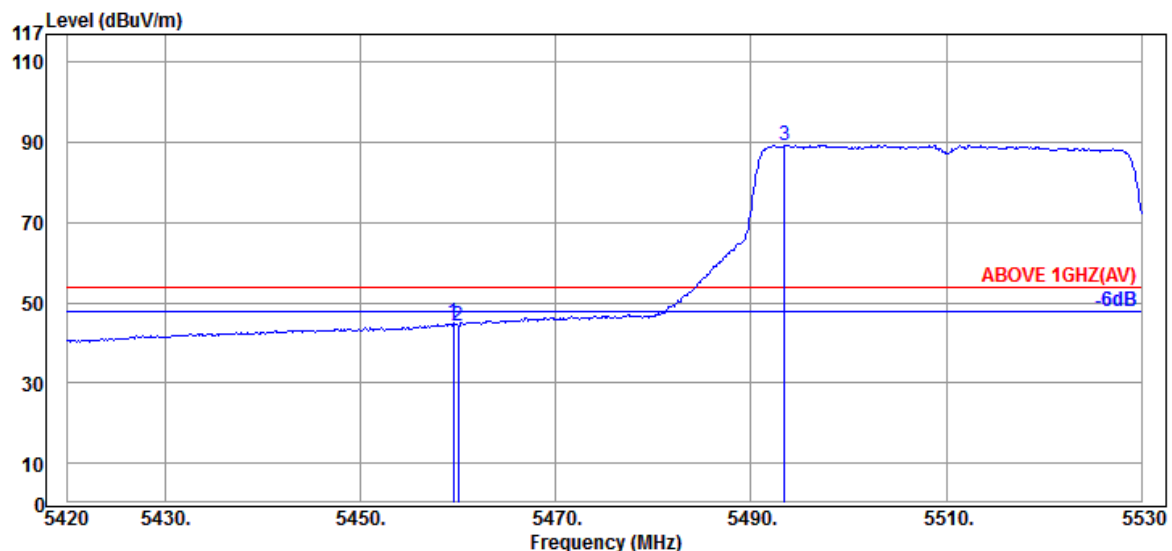

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.49	34.70	10.84	-0.61	44.93	54.00	9.07	Average
5460.04	34.70	10.84	-1.20	44.34	54.00	9.66	Average
@ 5493.48	34.63	10.87	43.88	89.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5510MHz

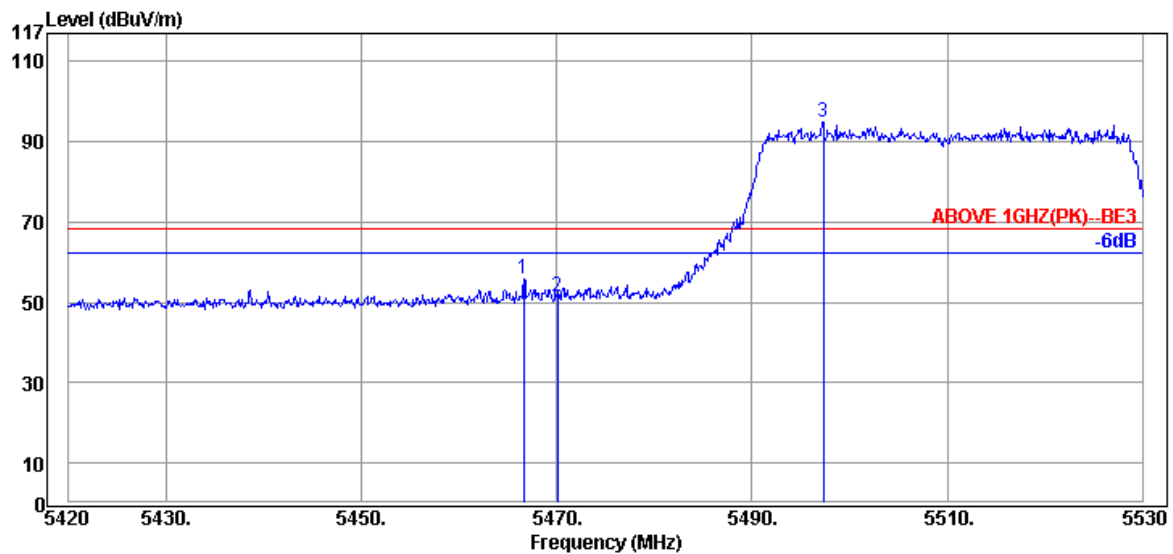

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.64	34.67	10.85	10.21	55.73	68.20	12.47	Peak
5470.05	34.67	10.85	5.78	51.30	68.20	16.90	Peak
@ 5497.33	34.60	10.88	49.58	95.06	---	---	Peak

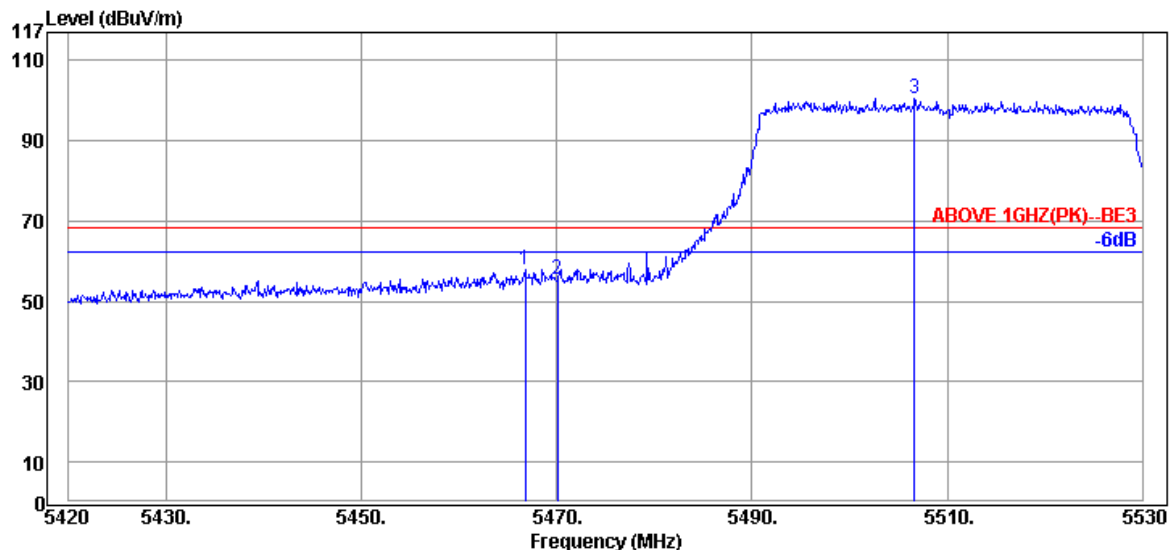

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.75	34.67	10.85	12.48	58.00	68.20	10.20	Peak
5470.05	34.67	10.85	9.81	55.33	68.20	12.87	Peak
@ 5506.68	34.60	10.88	54.89	100.37	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5670MHz

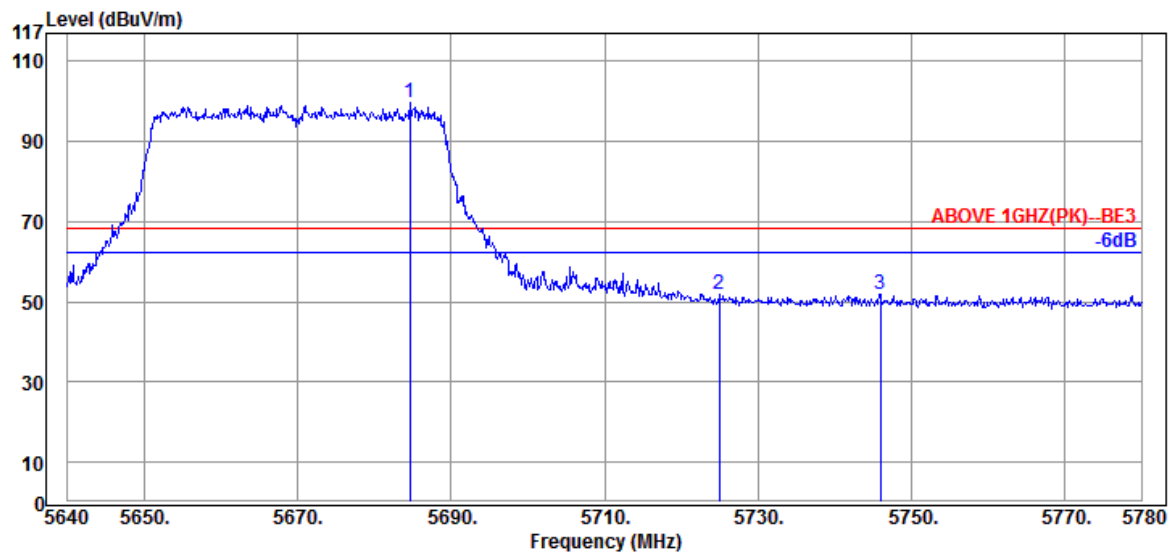

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5684.66	34.90	10.90	53.84	99.64	---	---	Peak
5725.00	34.83	10.91	6.02	51.76	68.20	16.44	Peak
5745.98	34.80	10.91	6.18	51.89	68.20	16.31	Peak

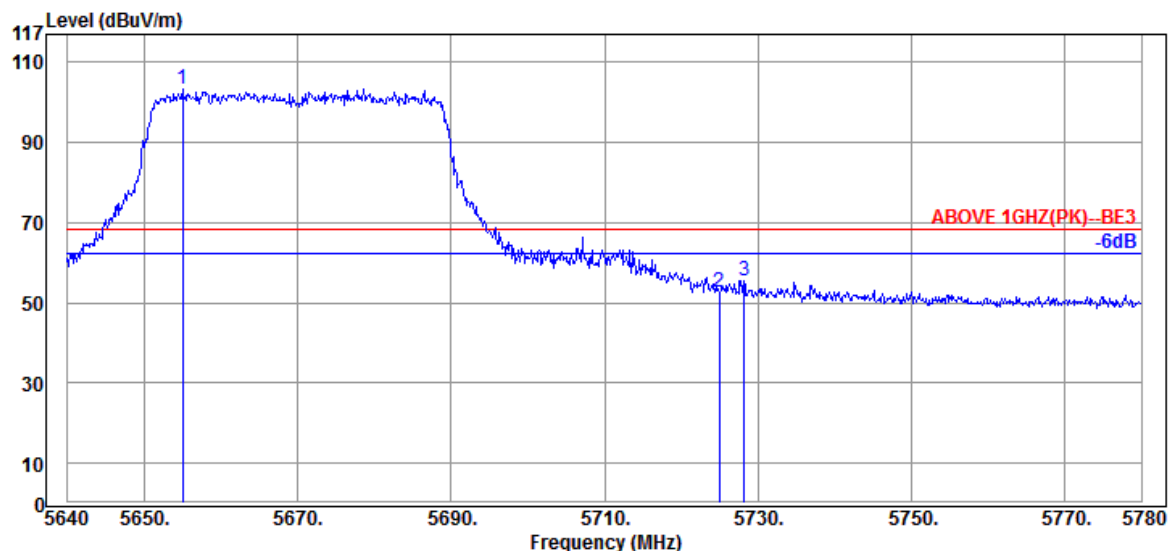

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5654.98	34.80	10.90	57.75	103.45	---	---	Peak
5725.00	34.83	10.91	6.75	52.49	68.20	15.71	Peak
5728.20	34.83	10.91	9.81	55.55	68.20	12.65	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5710MHz

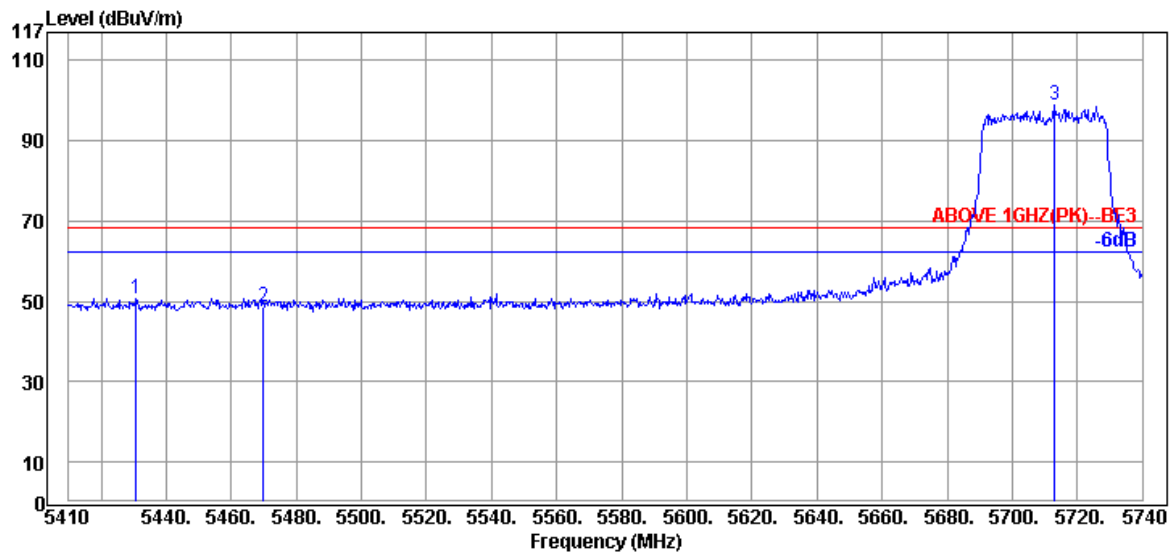

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.79	34.78	10.83	5.22	50.83	68.20	17.37	Peak
5470.00	34.66	10.86	3.13	48.65	68.20	19.55	Peak
@ 5712.94	34.87	10.91	53.28	99.06	---	---	Peak

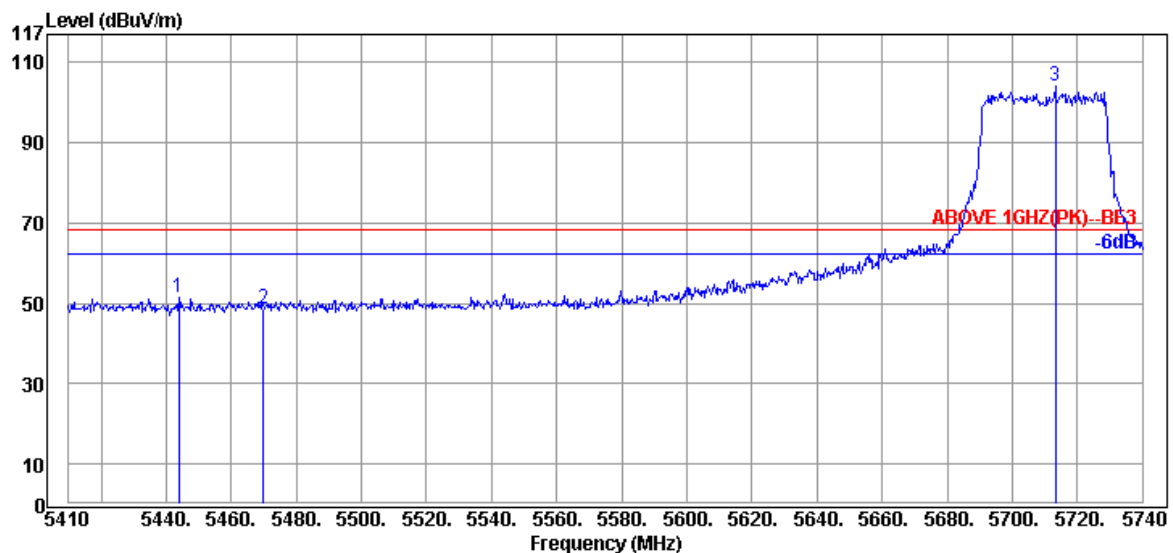

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.99	34.72	10.84	5.88	51.44	68.20	16.76	Peak
5470.00	34.66	10.86	3.33	48.85	68.20	19.35	Peak
@ 5713.27	34.87	10.91	58.22	104.00	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5710MHz

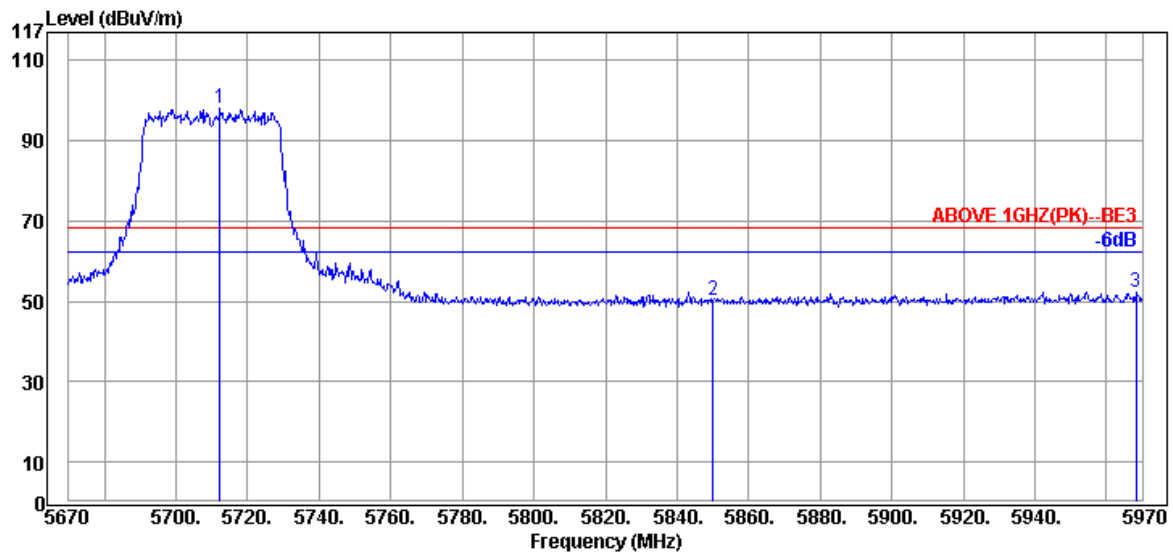

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.30	34.87	10.90	52.19	97.96	---	---	Peak
5850.00	35.50	10.92	3.99	50.41	68.20	17.79	Peak
5968.20	35.77	10.94	5.69	52.40	68.20	15.80	Peak

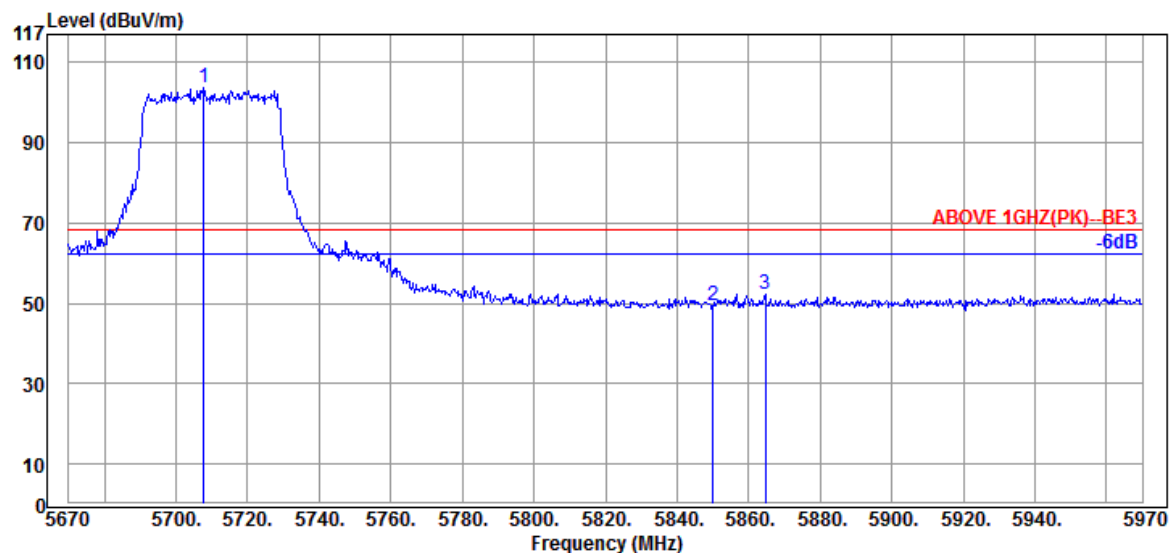

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.80	34.87	10.90	57.79	103.56	---	---	Peak
5850.00	35.50	10.92	3.00	49.42	68.20	18.78	Peak
5864.70	35.53	10.92	5.81	52.26	68.20	15.94	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
		Frequency	TX 5210MHz

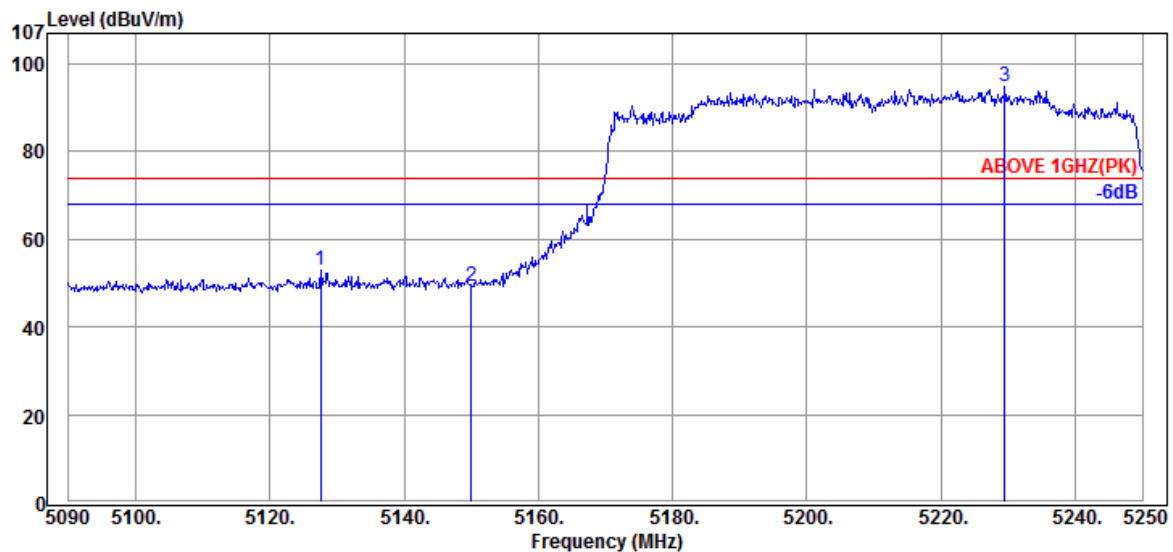

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.60	34.63	10.59	7.73	52.95	74.00	21.05	Peak
5150.00	34.70	10.61	3.95	49.26	74.00	24.74	Peak
@ 5229.52	34.50	10.67	49.56	94.73	---	---	Peak

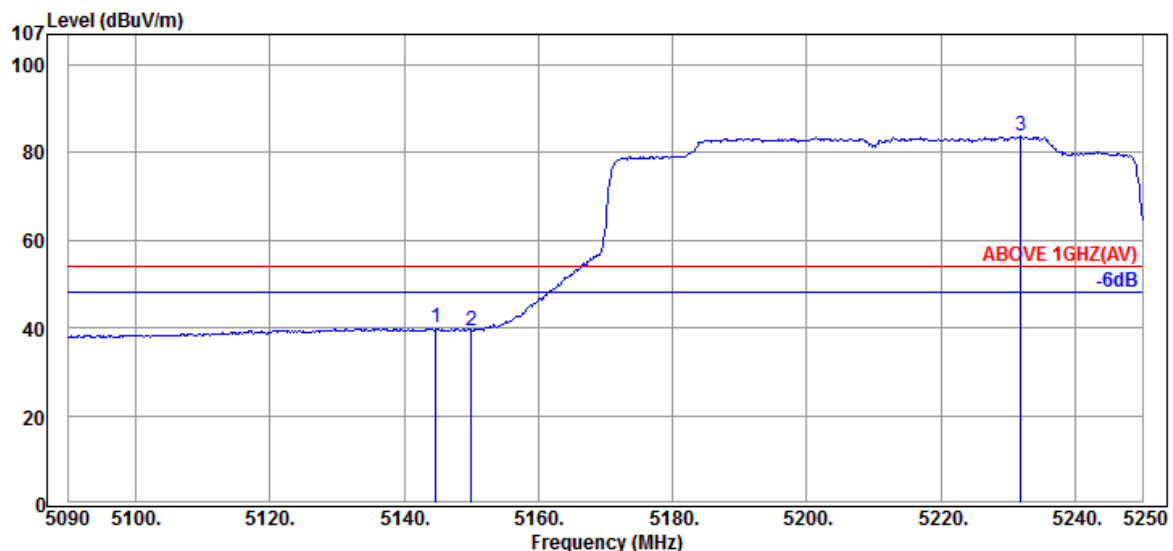

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.72	34.70	10.61	-5.39	39.92	54.00	14.08	Average
5150.00	34.70	10.61	-5.83	39.48	54.00	14.52	Average
@ 5231.92	34.50	10.67	38.57	83.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
		Frequency	TX 5210MHz

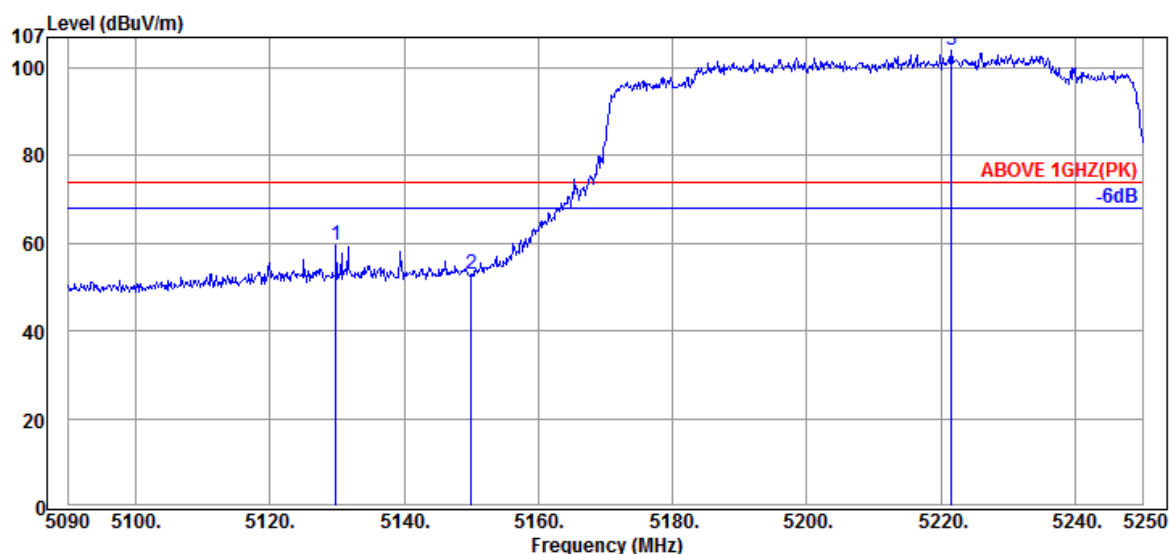

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.84	34.63	10.59	14.36	59.58	74.00	14.42	Peak
5150.00	34.70	10.61	7.64	52.95	74.00	21.05	Peak
@ 5221.52	34.50	10.66	58.73	103.89	---	---	Peak

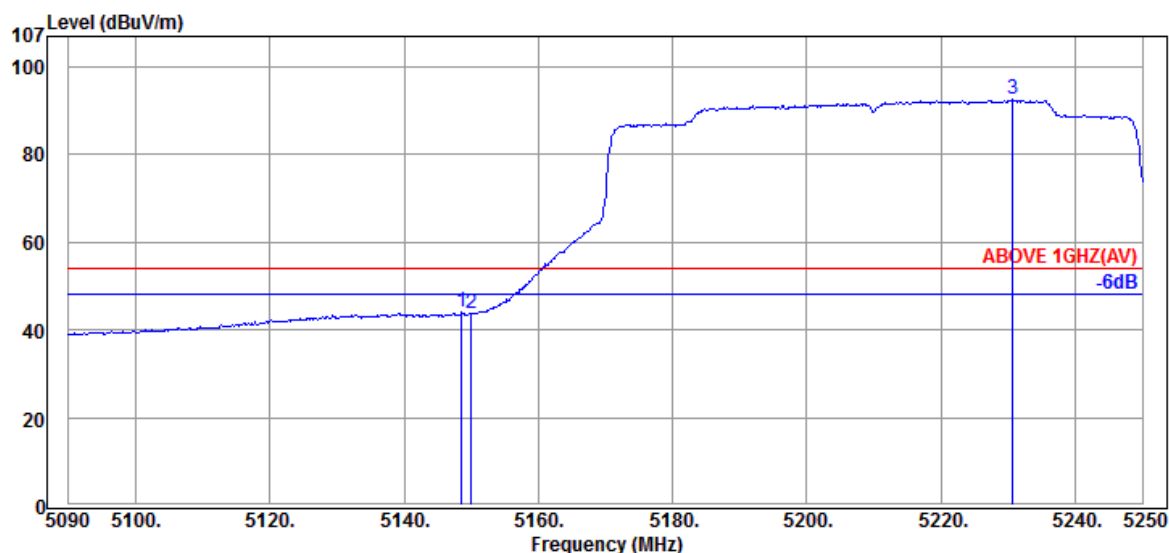

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.56	34.70	10.61	-1.34	43.97	54.00	10.03	Average
5150.00	34.70	10.61	-1.62	43.69	54.00	10.31	Average
@ 5230.64	34.50	10.67	47.36	92.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
		Frequency	TX 5290MHz

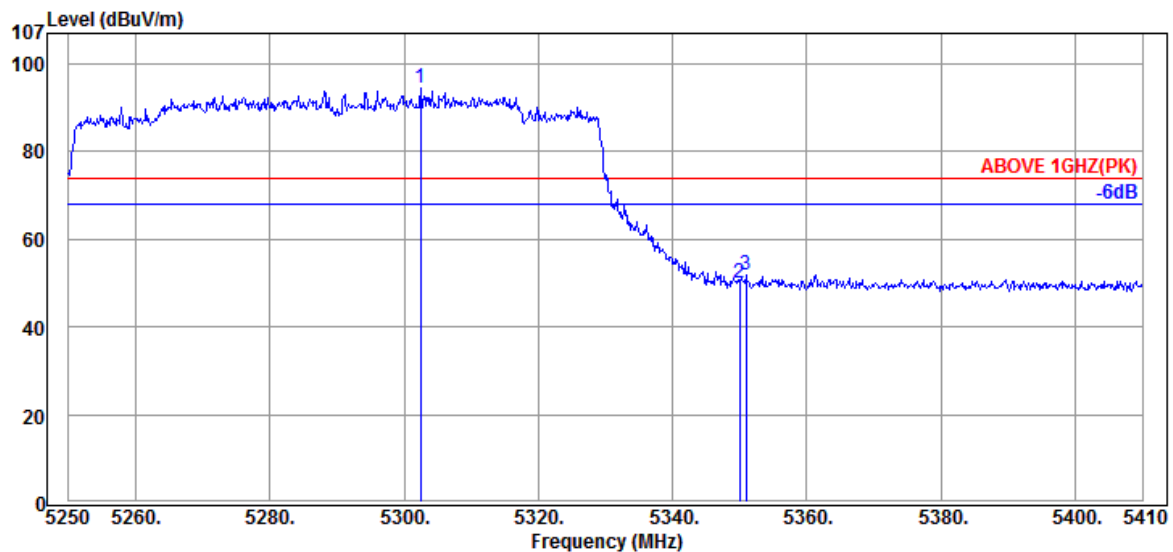

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.48	34.60	10.72	49.28	94.60	---	---	Peak
5350.00	34.80	10.76	4.27	49.83	74.00	24.17	Peak
5350.96	34.80	10.76	6.30	51.86	74.00	22.14	Peak

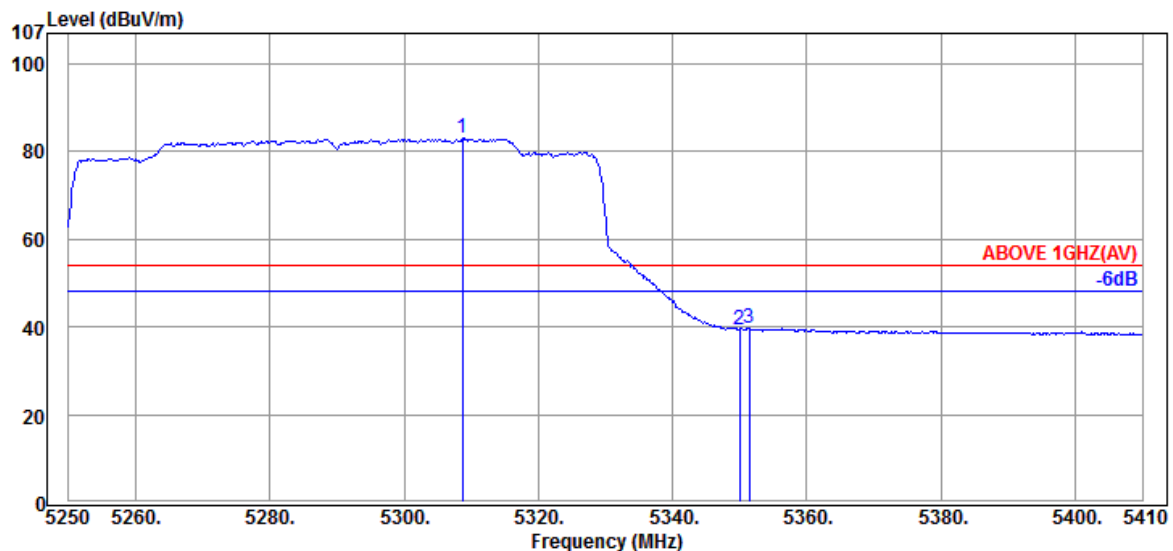

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.72	34.60	10.72	37.74	83.06	---	---	Average
5350.00	34.80	10.76	-6.13	39.43	54.00	14.57	Average
5351.44	34.80	10.76	-5.90	39.66	54.00	14.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
		Frequency	TX 5290MHz

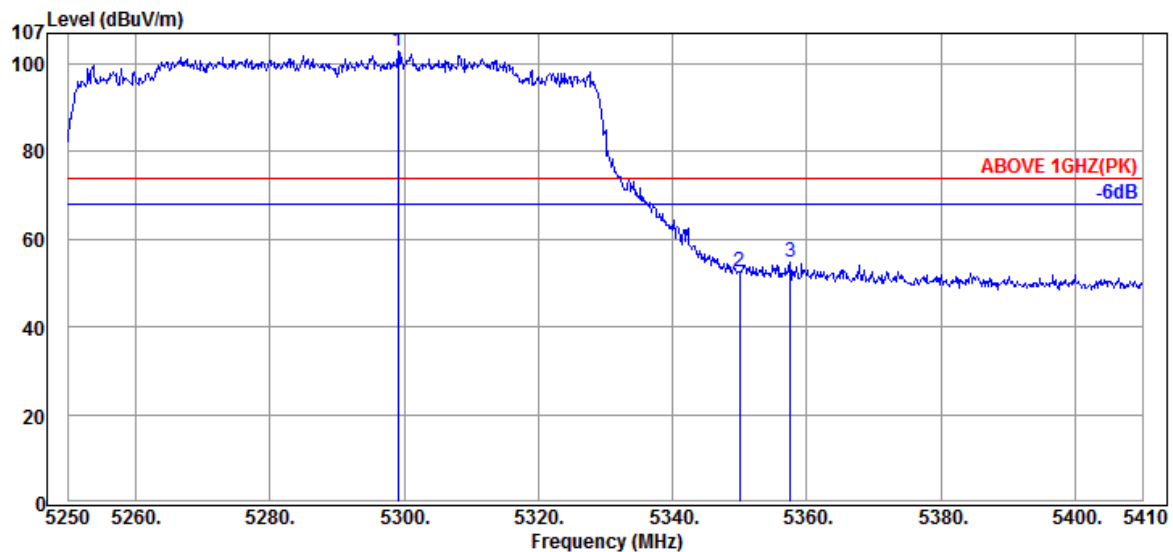

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.12	34.60	10.72	57.50	102.82	---	---	Peak
5350.00	34.80	10.76	7.10	52.66	74.00	21.34	Peak
5357.52	34.80	10.76	9.31	54.87	74.00	19.13	Peak

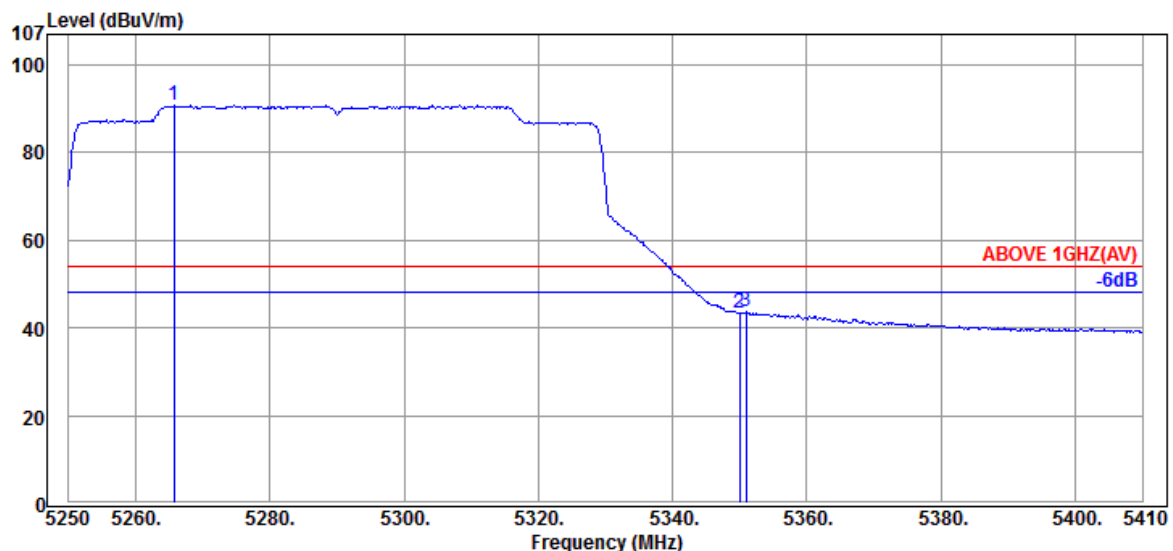

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.68	34.53	10.70	45.56	90.79	---	---	Average
5350.00	34.80	10.76	-2.23	43.33	54.00	10.67	Average
5350.96	34.80	10.76	-1.94	43.62	54.00	10.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5530MHz

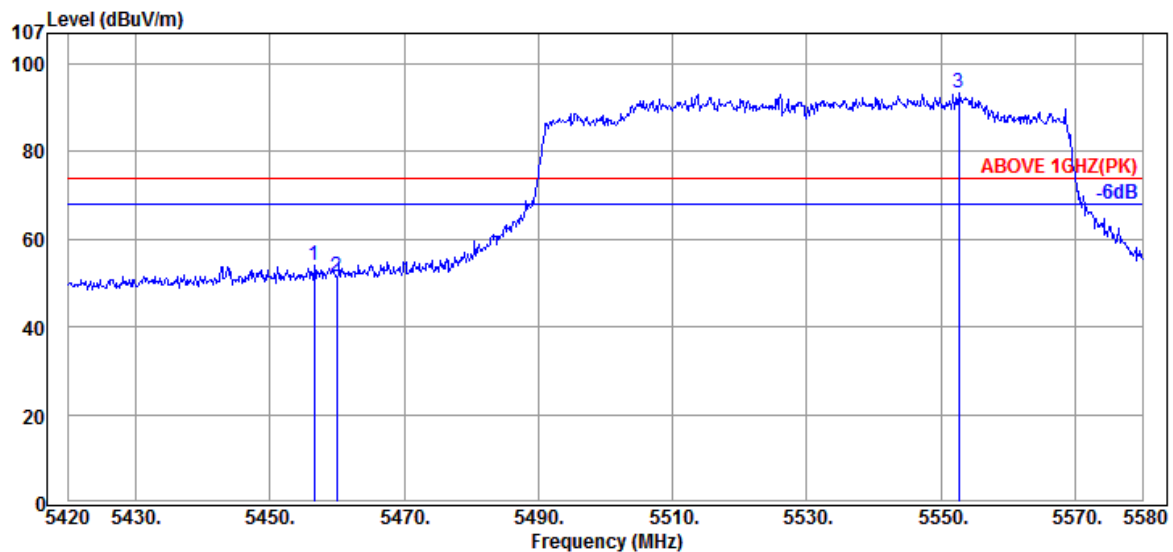

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.64	34.70	10.84	8.51	54.05	74.00	19.95	Peak
5460.00	34.70	10.84	6.12	51.66	74.00	22.34	Peak
@ 5552.64	34.70	10.89	47.66	93.25	---	---	Peak

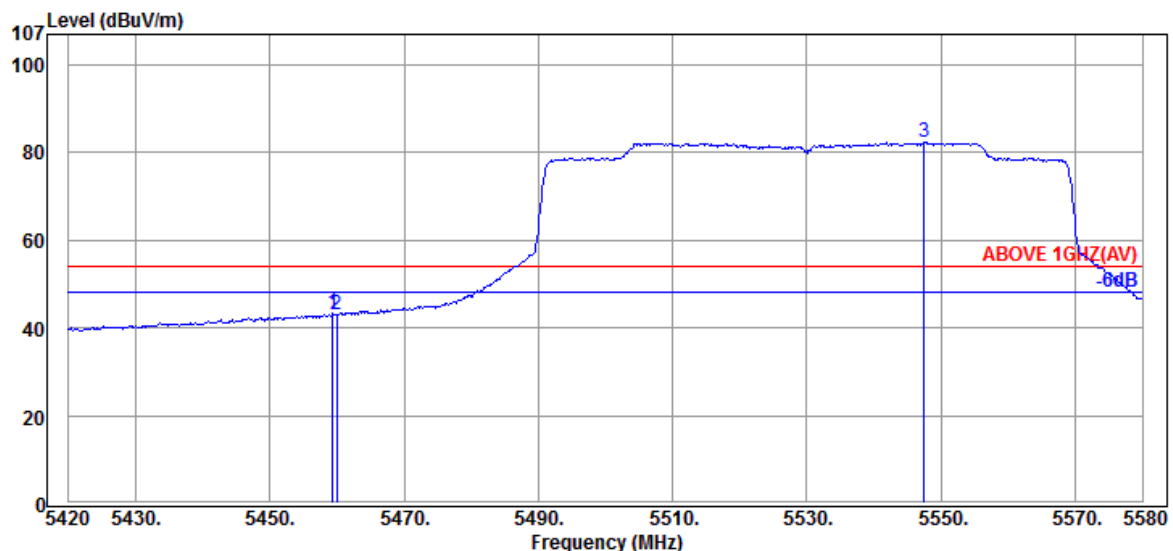

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.36	34.70	10.84	-2.30	43.24	54.00	10.76	Average
5460.00	34.70	10.84	-2.60	42.94	54.00	11.06	Average
@ 5547.52	34.70	10.89	36.66	82.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5530MHz

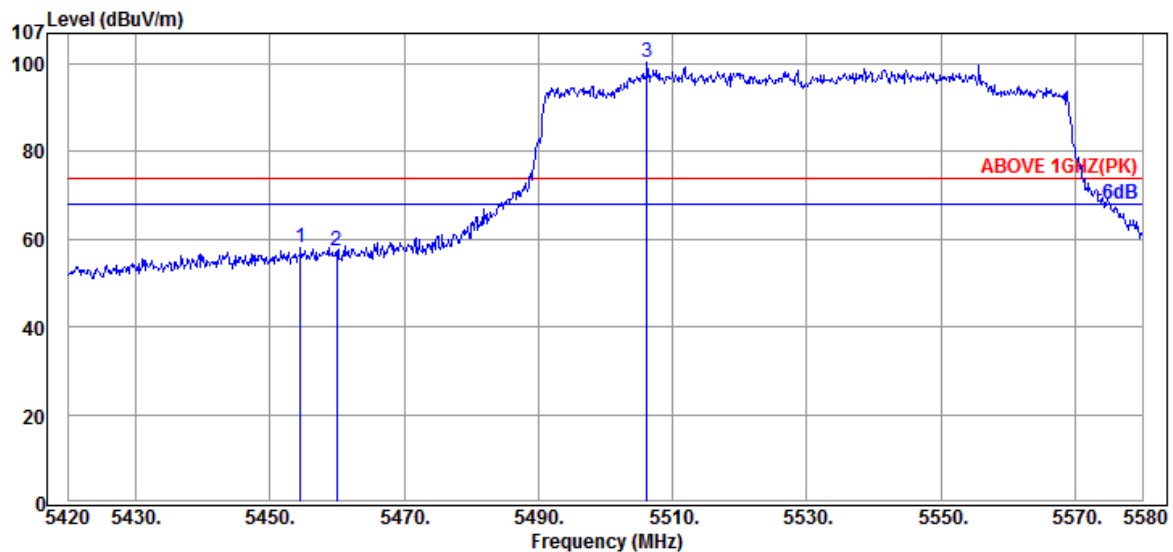

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.56	34.70	10.84	12.68	58.22	74.00	15.78	Peak
5460.00	34.70	10.84	11.70	57.24	74.00	16.76	Peak
@ 5506.24	34.60	10.88	54.72	100.20	---	---	Peak

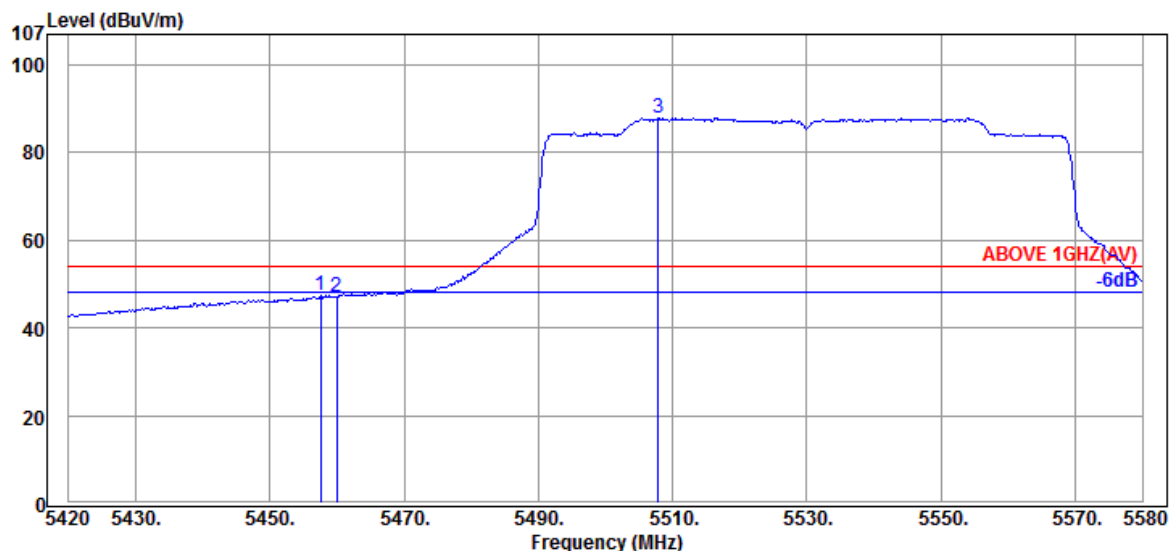

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.60	34.70	10.84	1.78	47.32	54.00	6.68	Average
5460.00	34.70	10.84	1.63	47.17	54.00	6.83	Average
@ 5507.84	34.60	10.88	42.44	87.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5530MHz

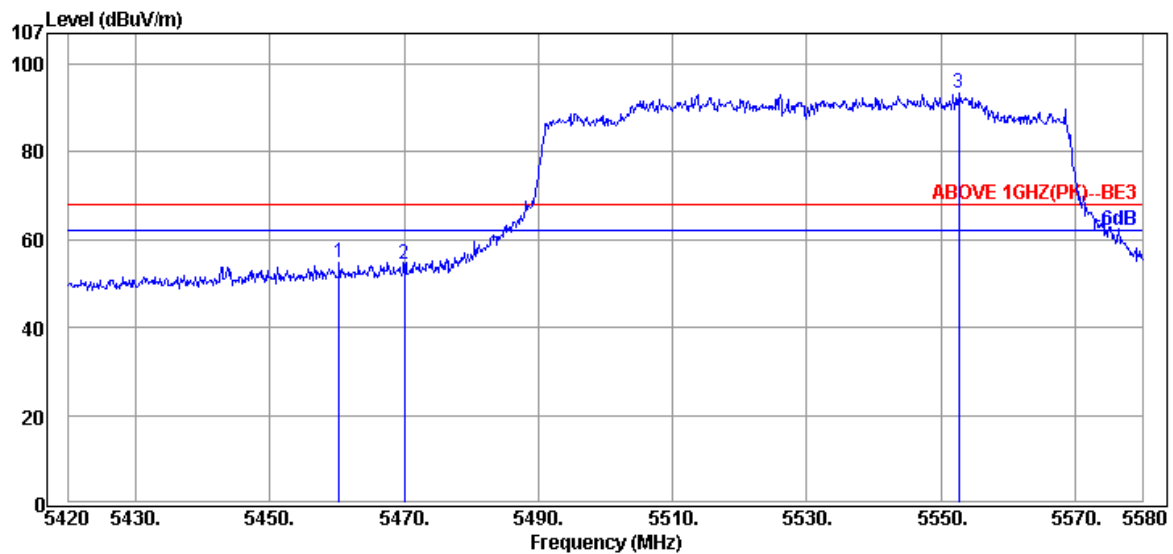

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.32	34.70	10.84	9.25	54.79	68.20	13.41	Peak
5470.08	34.67	10.85	9.01	54.53	68.20	13.67	Peak
@ 5552.64	34.70	10.89	47.66	93.25	---	---	Peak

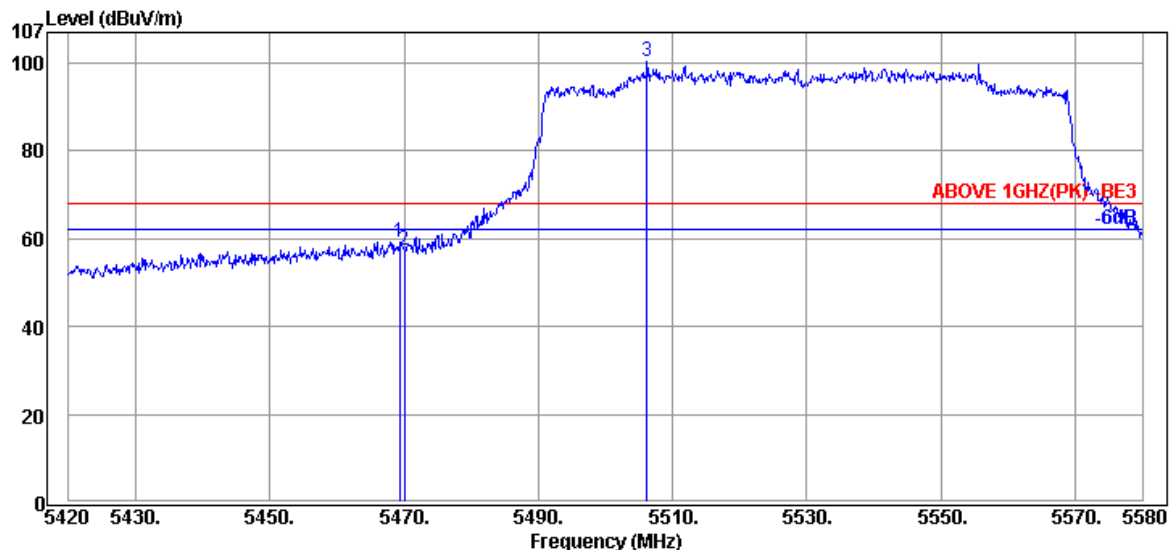

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.28	34.67	10.85	13.82	59.34	68.20	8.86	Peak
5470.08	34.67	10.85	11.73	57.25	68.20	10.95	Peak
@ 5506.24	34.60	10.88	54.72	100.20	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5690MHz

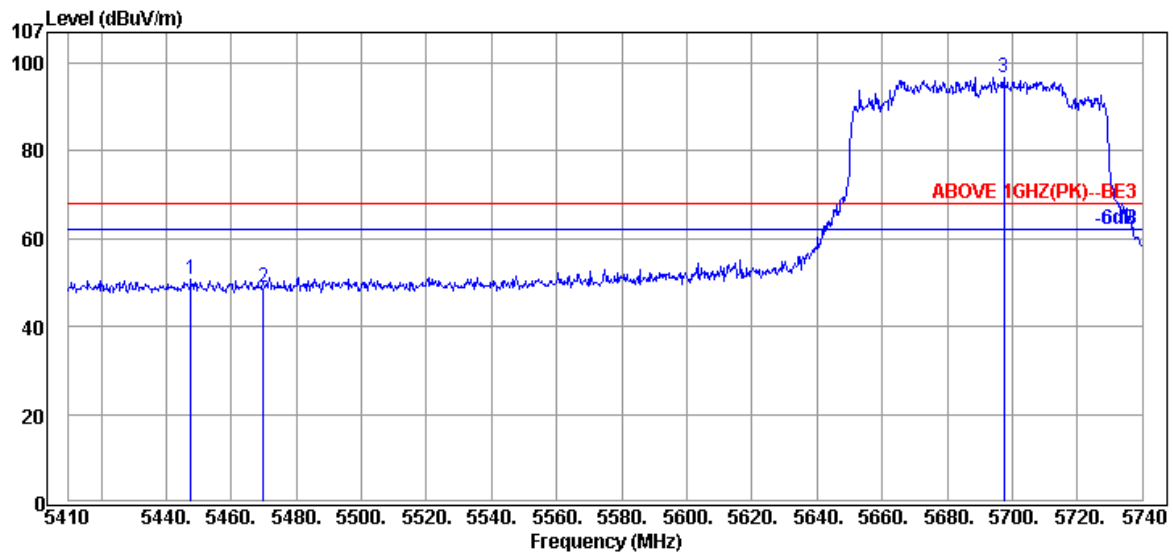

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.62	34.71	10.84	5.33	50.88	68.20	17.32	Peak
5470.00	34.66	10.86	3.30	48.82	68.20	19.38	Peak
@ 5697.43	34.89	10.90	51.07	96.86	---	---	Peak

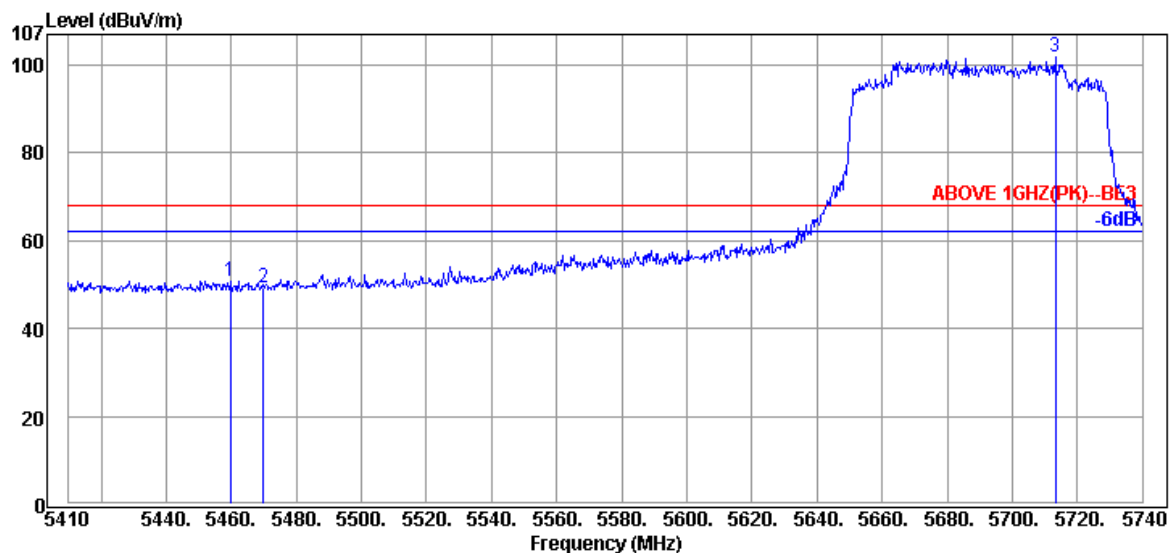

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.83	34.68	10.85	5.36	50.89	68.20	17.31	Peak
5470.00	34.66	10.86	3.92	49.44	68.20	18.76	Peak
@ 5713.27	34.87	10.91	55.93	101.71	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5690MHz

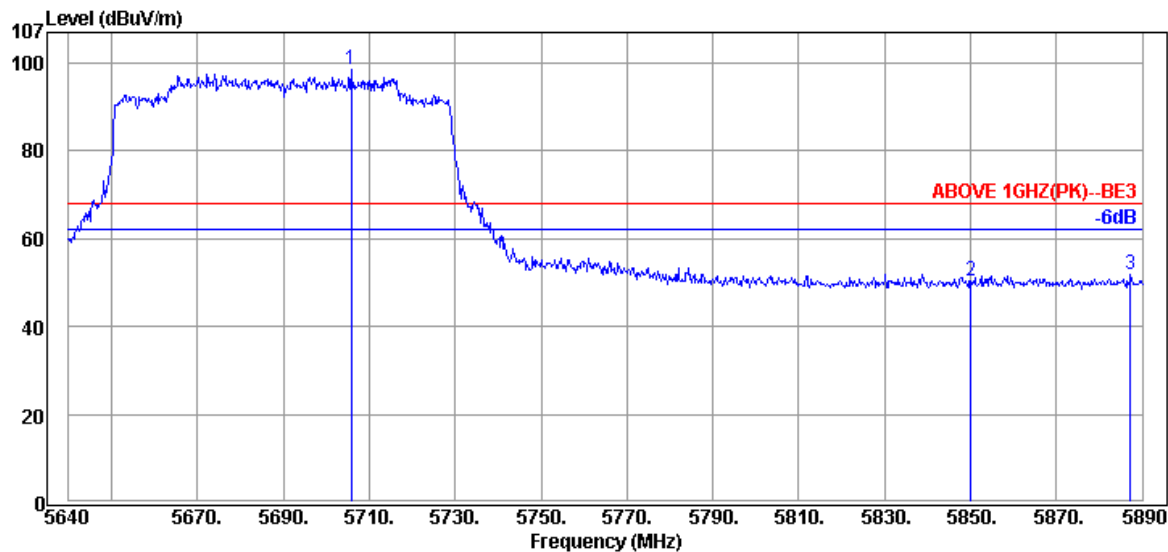

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.75	34.87	10.90	52.69	98.46	---	---	Peak
	5850.00	35.50	10.92	4.06	50.48	68.20	17.72	Peak
	5887.25	35.57	10.93	5.21	51.71	68.20	16.49	Peak

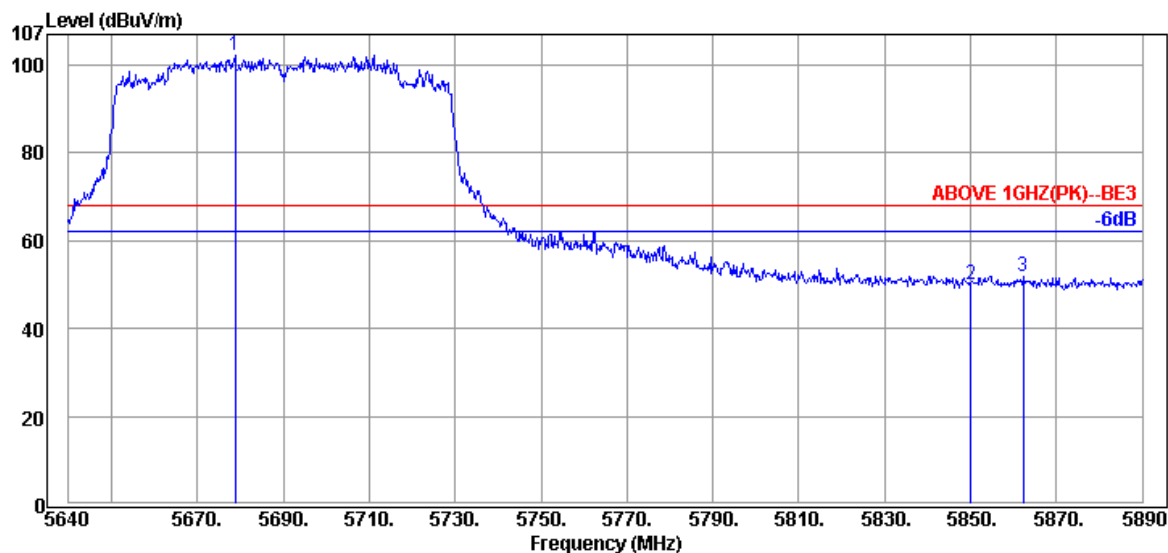

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5678.75	34.85	10.90	56.56	102.31	---	---	Peak
	5850.00	35.50	10.92	3.57	49.99	68.20	18.21	Peak
	5862.25	35.53	10.92	5.50	51.95	68.20	16.25	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

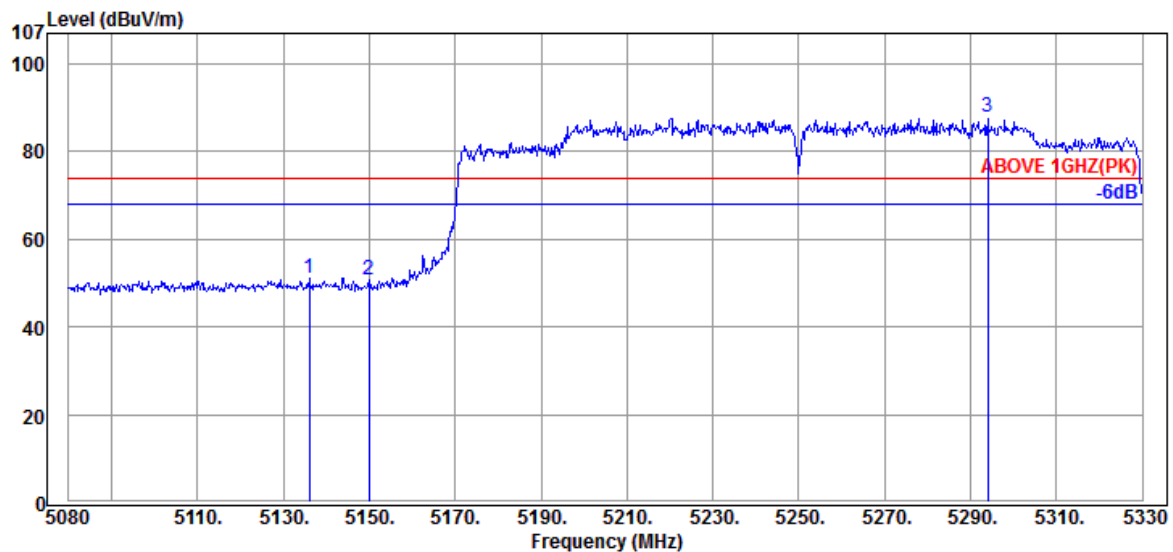

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.00	34.63	10.59	5.93	51.15	74.00	22.85	Peak
5150.00	34.70	10.61	5.42	50.73	74.00	23.27	Peak
@ 5294.00	34.60	10.72	42.38	87.70	---	---	Peak

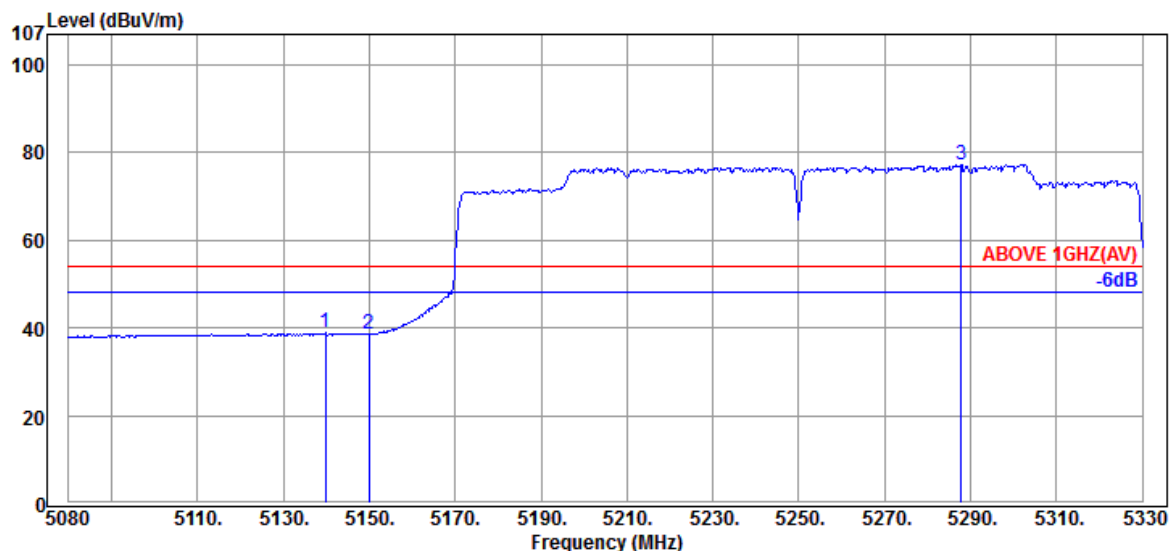

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.75	34.70	10.61	-6.46	38.85	54.00	15.15	Average
5150.00	34.70	10.61	-6.68	38.63	54.00	15.37	Average
@ 5287.75	34.57	10.71	31.88	77.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

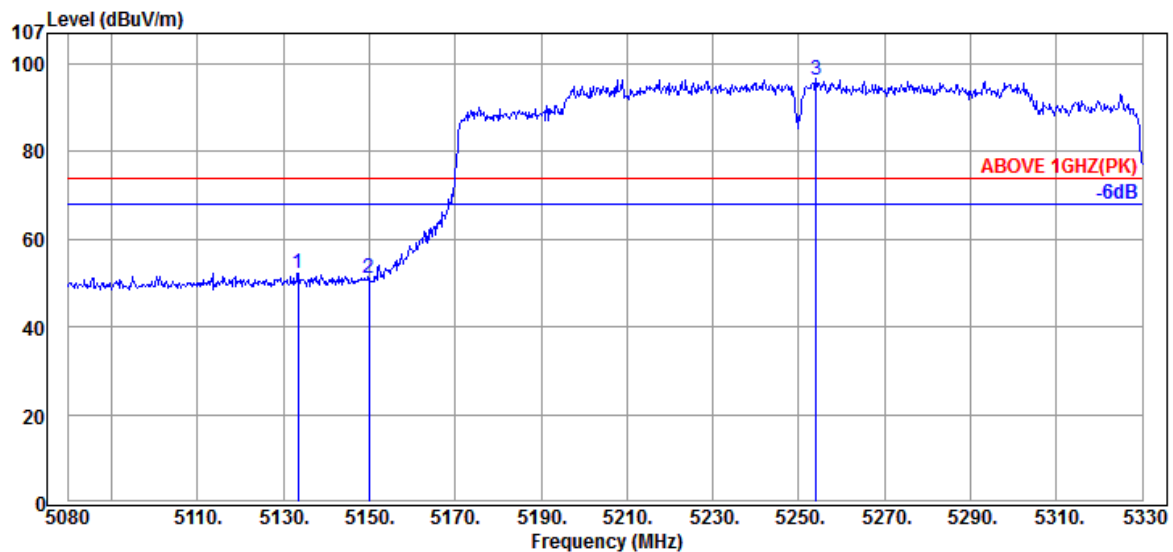

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.50	34.63	10.59	7.15	52.37	74.00	21.63	Peak
5150.00	34.70	10.61	5.73	51.04	74.00	22.96	Peak
@ 5254.00	34.50	10.68	51.34	96.52	---	---	Peak

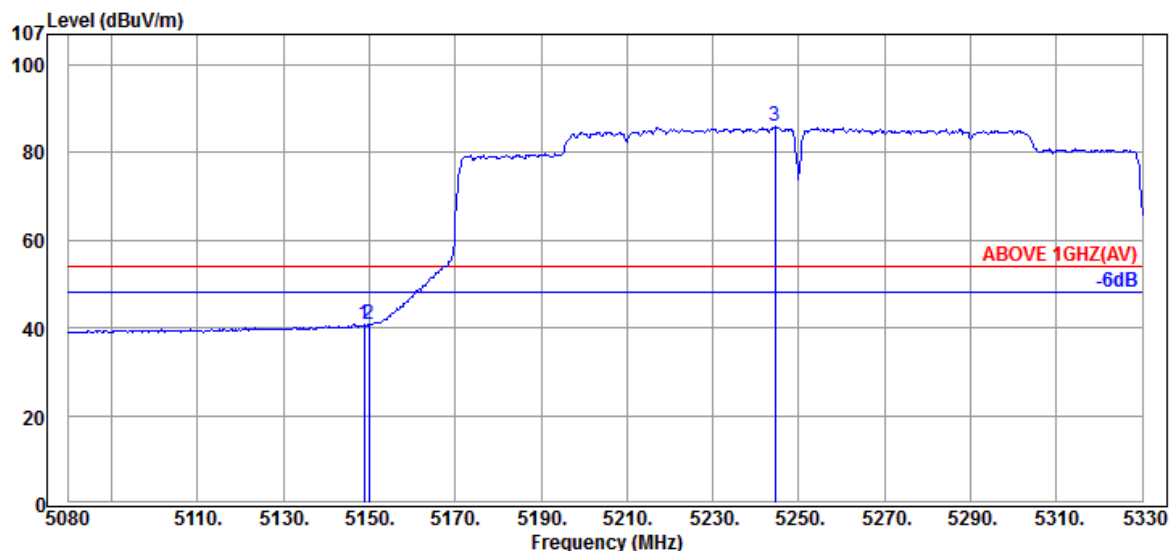

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.75	34.70	10.61	-4.61	40.70	54.00	13.30	Average
5150.00	34.70	10.61	-4.59	40.72	54.00	13.28	Average
@ 5244.50	34.50	10.68	40.73	85.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

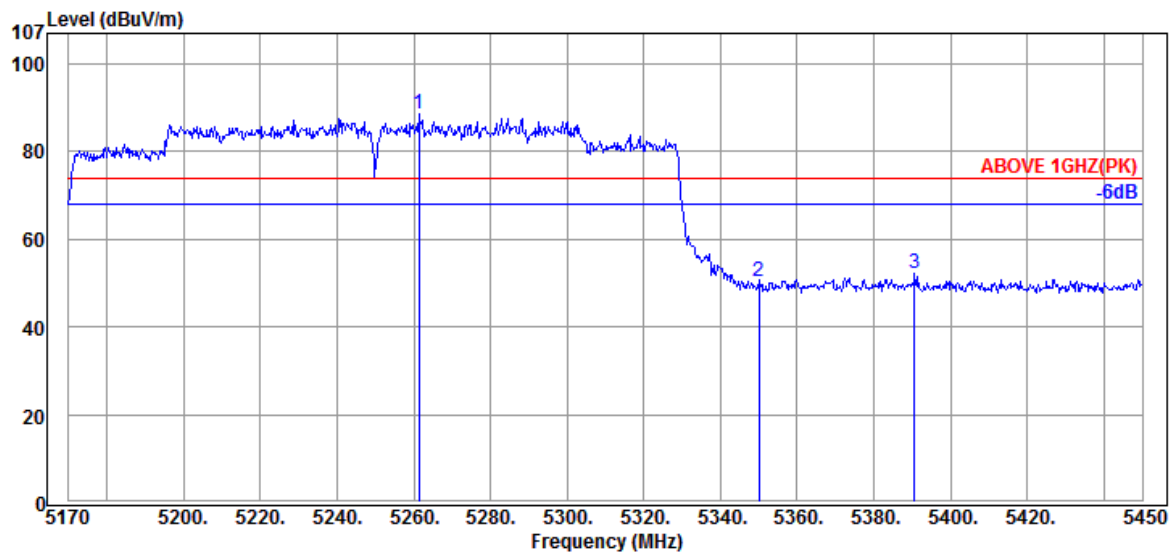

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5261.28	34.53	10.70	43.55	88.78	---	---	Peak
5350.00	34.80	10.76	4.98	50.54	74.00	23.46	Peak
5390.64	34.87	10.79	6.61	52.27	74.00	21.73	Peak

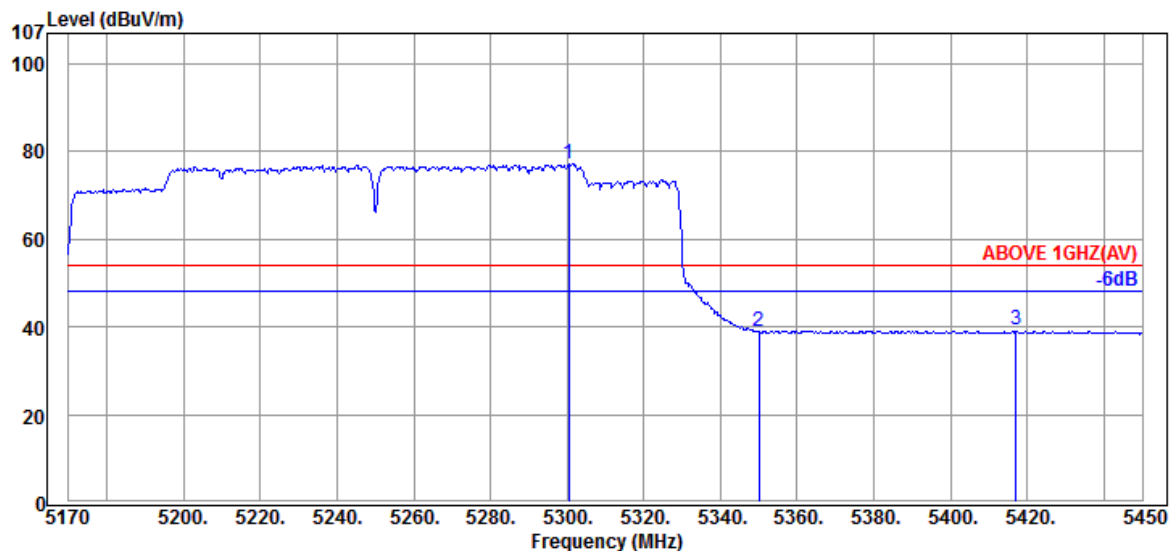

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.48	34.60	10.72	31.75	77.07	---	---	Average
5350.00	34.80	10.76	-6.64	38.92	54.00	15.08	Average
5416.96	34.83	10.82	-6.49	39.16	54.00	14.84	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

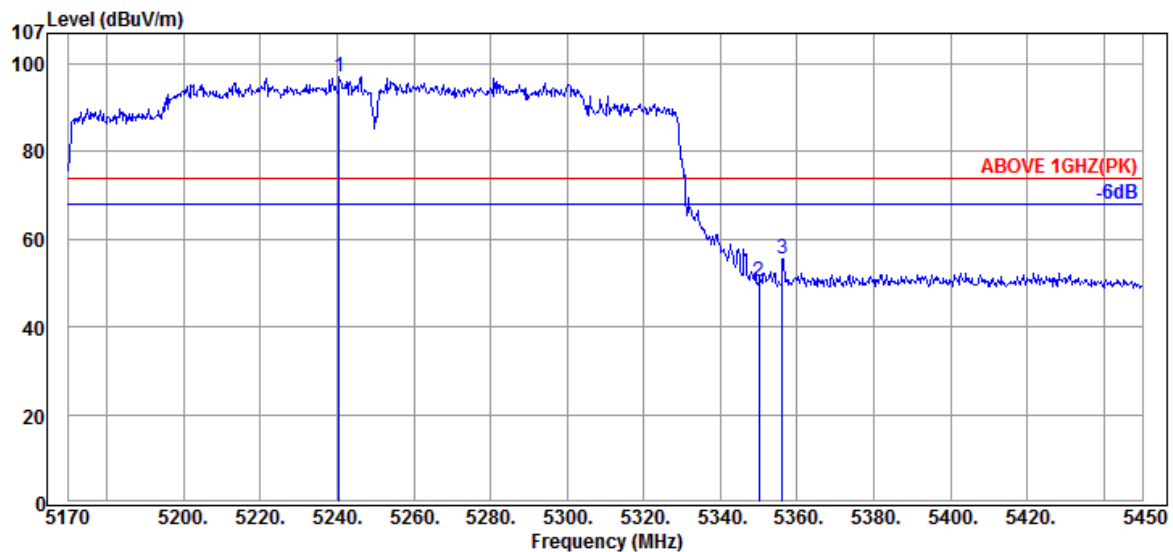

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5240.56	34.50	10.67	52.05	97.22	---	---	Peak
5350.00	34.80	10.76	4.84	50.40	74.00	23.60	Peak
5356.20	34.80	10.76	9.86	55.42	74.00	18.58	Peak

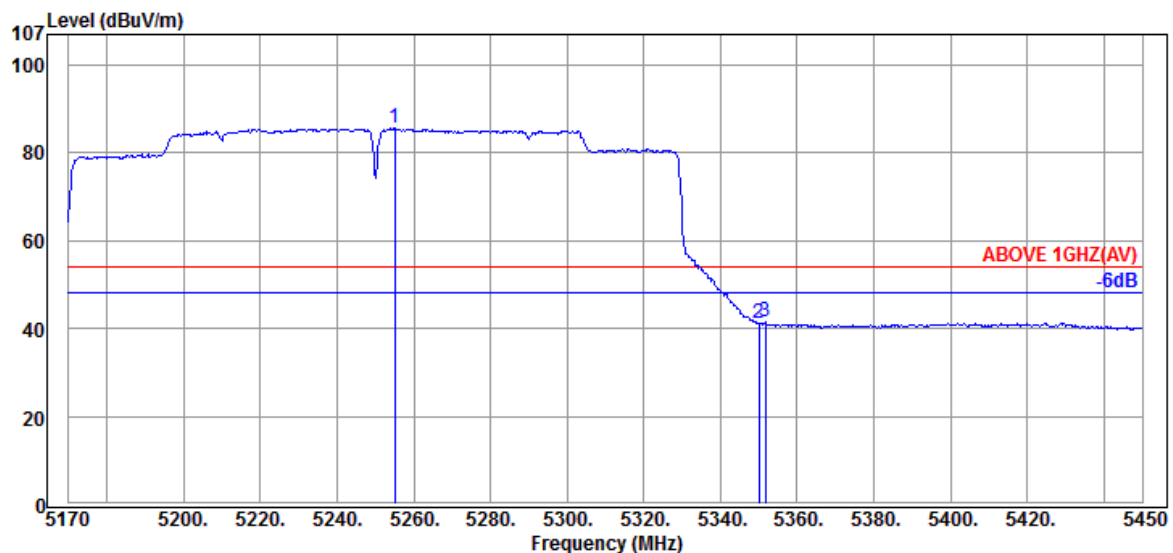

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5255.12	34.50	10.68	40.42	85.60	---	---	Average
5350.00	34.80	10.76	-4.29	41.27	54.00	12.73	Average
5351.72	34.80	10.76	-4.12	41.44	54.00	12.56	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

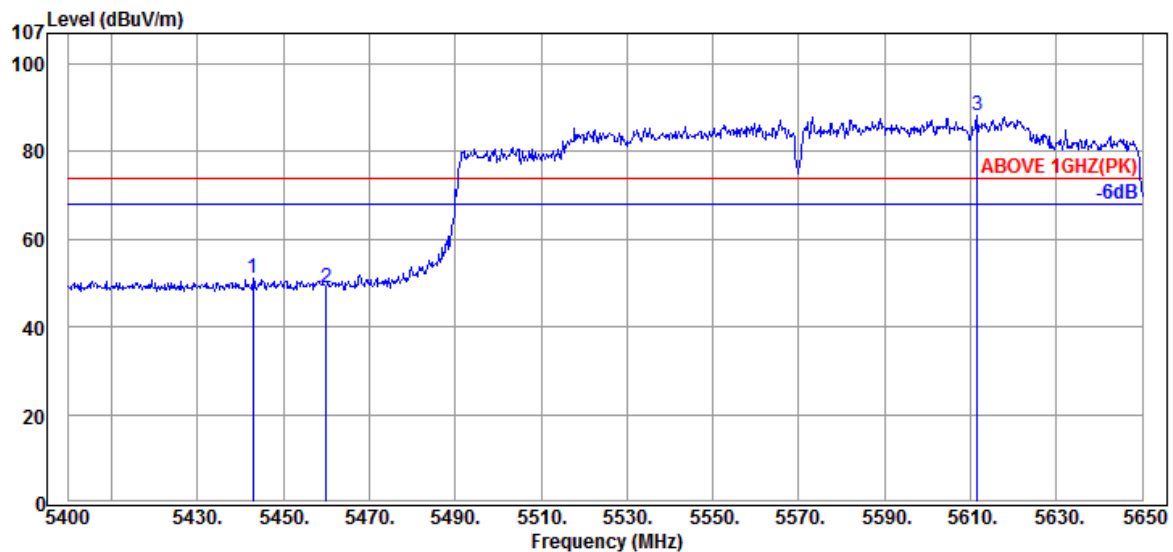

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5443.00	34.77	10.83	5.43	51.03	74.00	22.97	Peak
5460.00	34.70	10.84	3.54	49.08	74.00	24.92	Peak
@ 5611.50	34.90	10.89	42.49	88.28	---	---	Peak

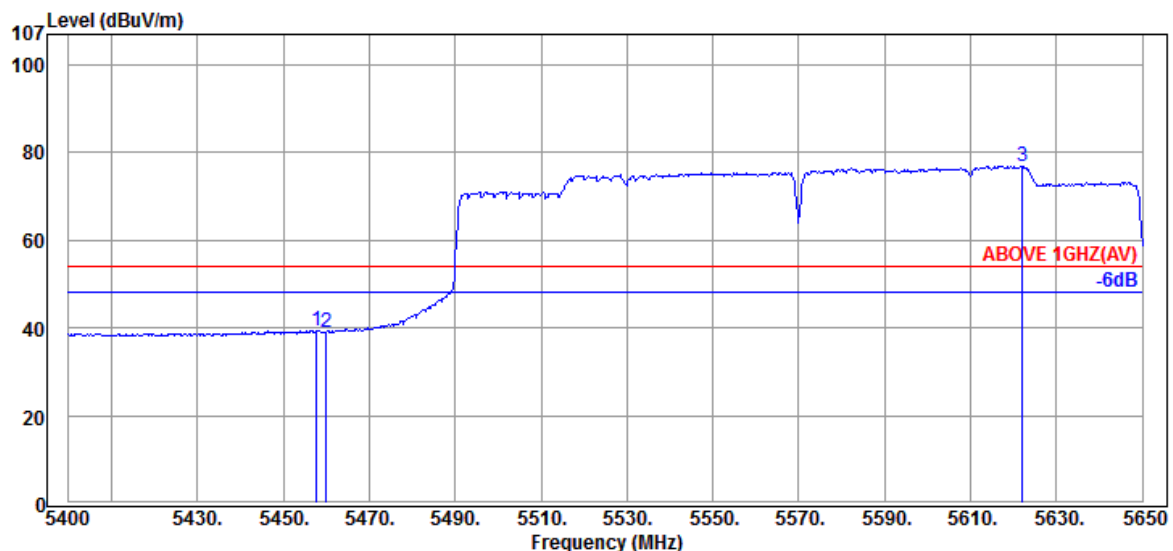

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.75	34.70	10.84	-6.07	39.47	54.00	14.53	Average
5460.00	34.70	10.84	-6.46	39.08	54.00	14.92	Average
@ 5622.00	34.87	10.89	31.19	76.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

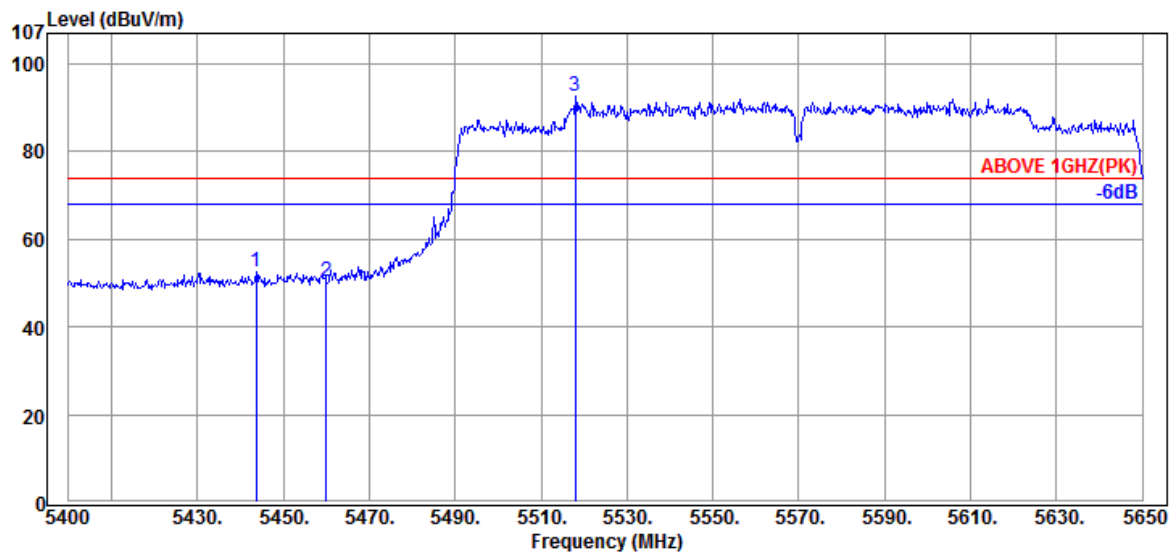

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.75	34.77	10.83	6.80	52.40	74.00	21.60	Peak
5460.00	34.70	10.84	5.02	50.56	74.00	23.44	Peak
@ 5518.00	34.63	10.88	47.21	92.72	---	---	Peak

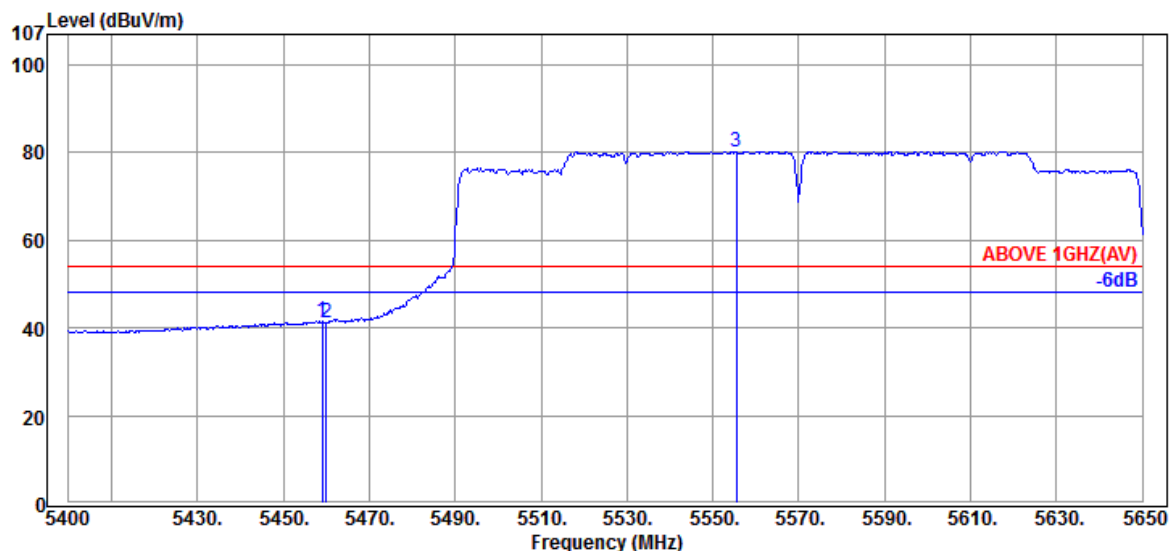

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.00	34.70	10.84	-3.93	41.61	54.00	12.39	Average
5460.00	34.70	10.84	-4.20	41.34	54.00	12.66	Average
@ 5555.50	34.70	10.89	34.73	80.32	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

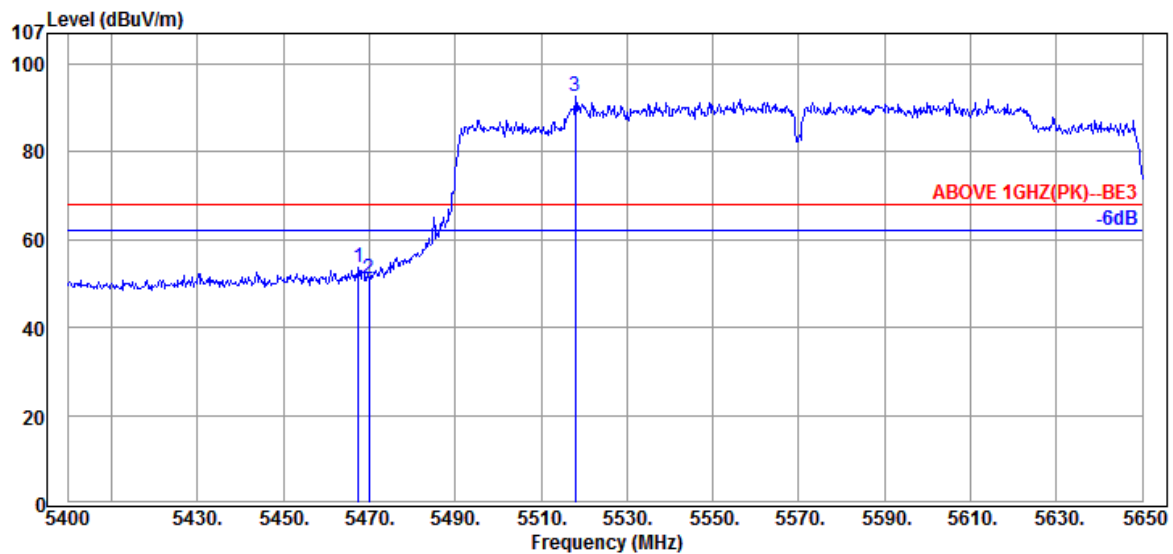

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.50	34.67	10.85	8.02	53.54	68.20	14.66	Peak
5470.00	34.67	10.85	5.57	51.09	68.20	17.11	Peak
@ 5518.00	34.63	10.88	47.21	92.72	---	---	Peak

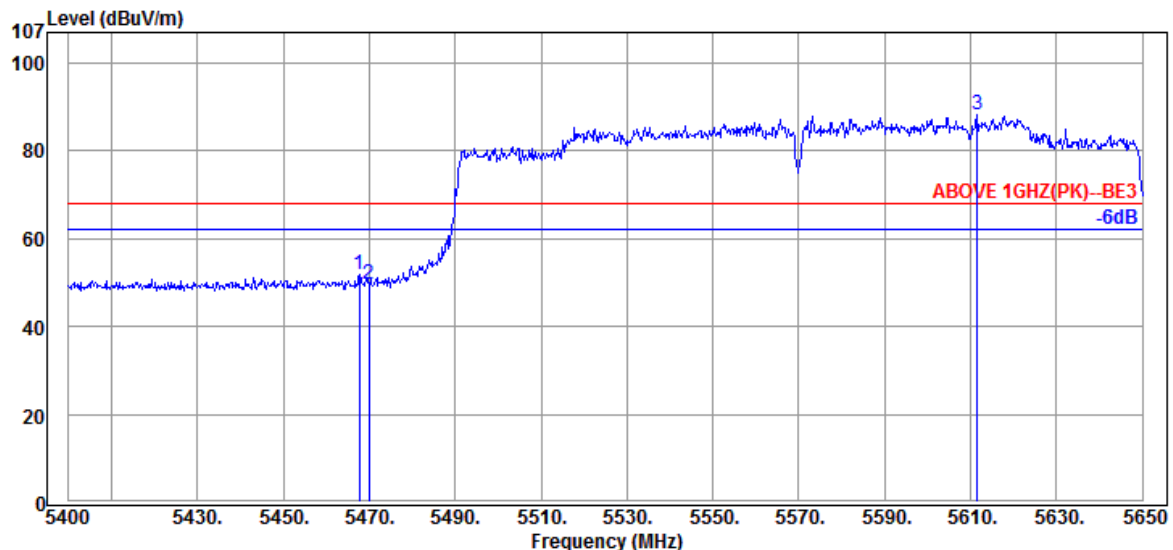

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.75	34.67	10.85	6.41	51.93	68.20	16.27	Peak
5470.00	34.67	10.85	3.94	49.46	68.20	18.74	Peak
@ 5611.50	34.90	10.89	42.49	88.28	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

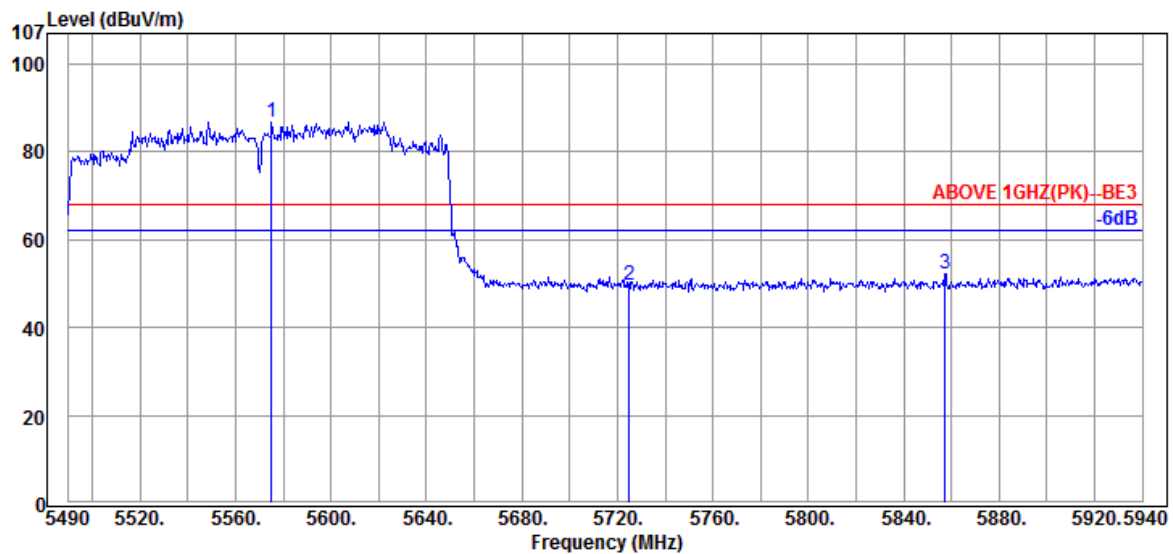

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5575.05	34.77	10.89	41.09	86.75	---	---	Peak
5725.00	34.83	10.91	3.79	49.53	68.20	18.67	Peak
5857.20	35.53	10.92	5.76	52.21	68.20	15.99	Peak

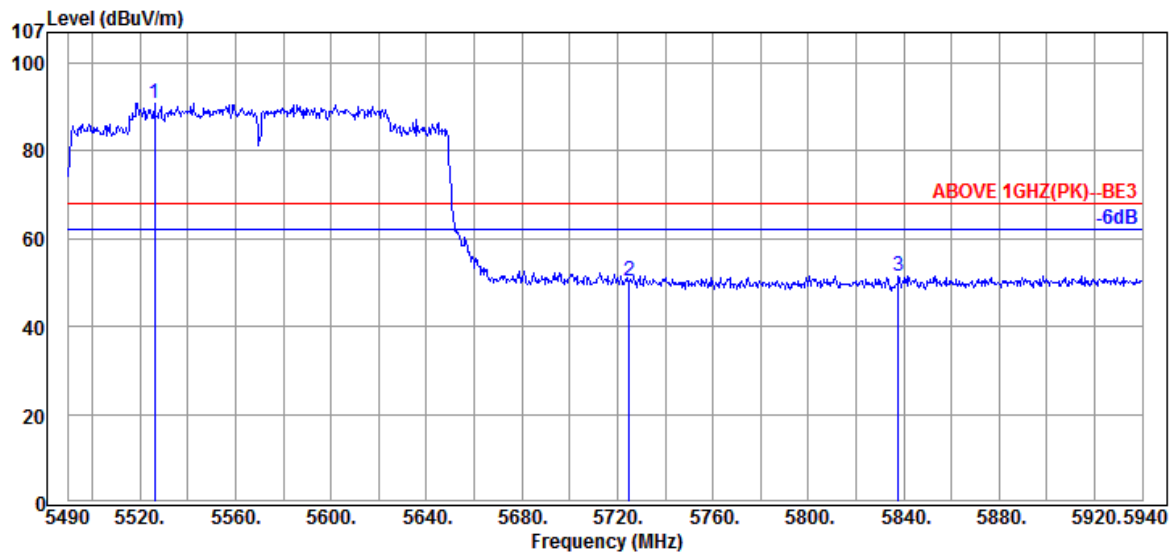

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5526.00	34.63	10.88	45.45	90.96	---	---	Peak
5725.00	34.83	10.91	4.60	50.34	68.20	17.86	Peak
5837.85	35.50	10.92	5.16	51.58	68.20	16.62	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

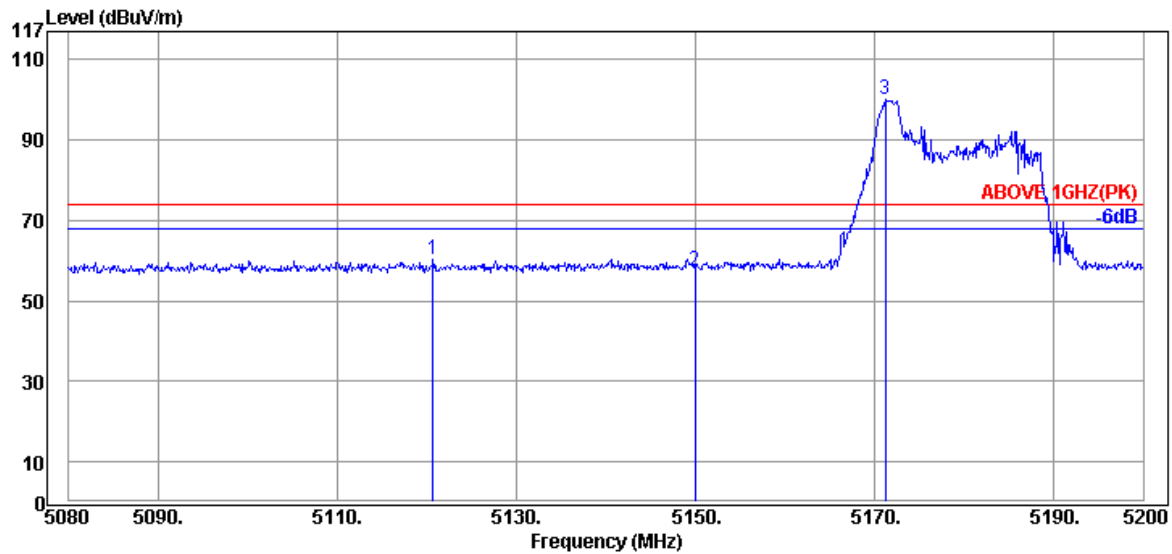

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.68	34.57	10.58	15.11	60.26	74.00	13.74	Peak
5149.96	34.70	10.61	12.28	57.59	74.00	16.41	Peak
@ 5171.20	34.63	10.62	54.77	100.02	---	---	Peak

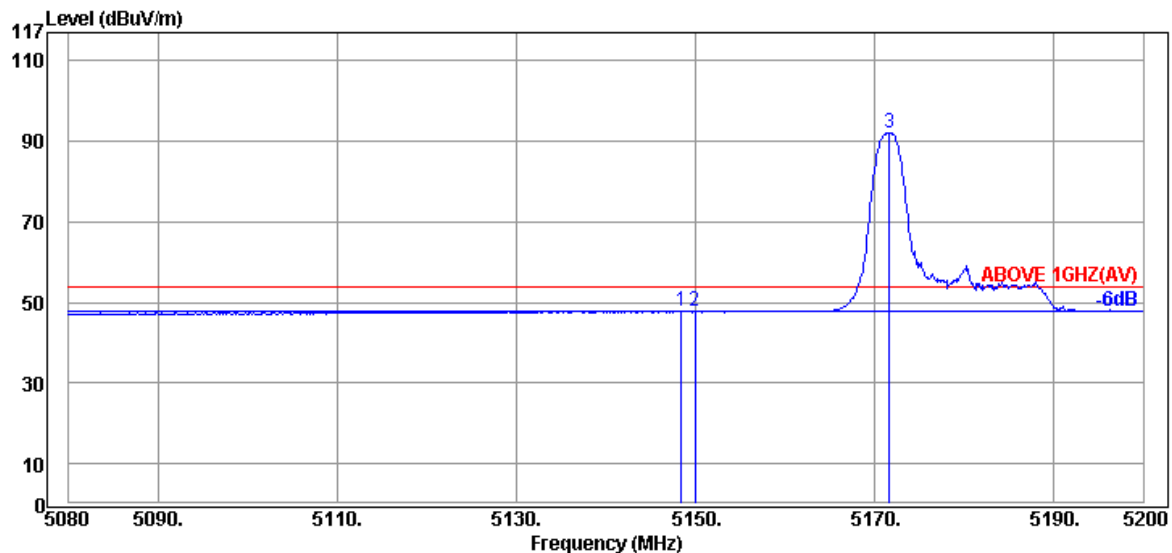

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.40	34.70	10.61	2.70	48.01	54.00	5.99	Average
5149.96	34.70	10.61	2.53	47.84	54.00	6.16	Average
@ 5171.68	34.63	10.62	47.01	92.26	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

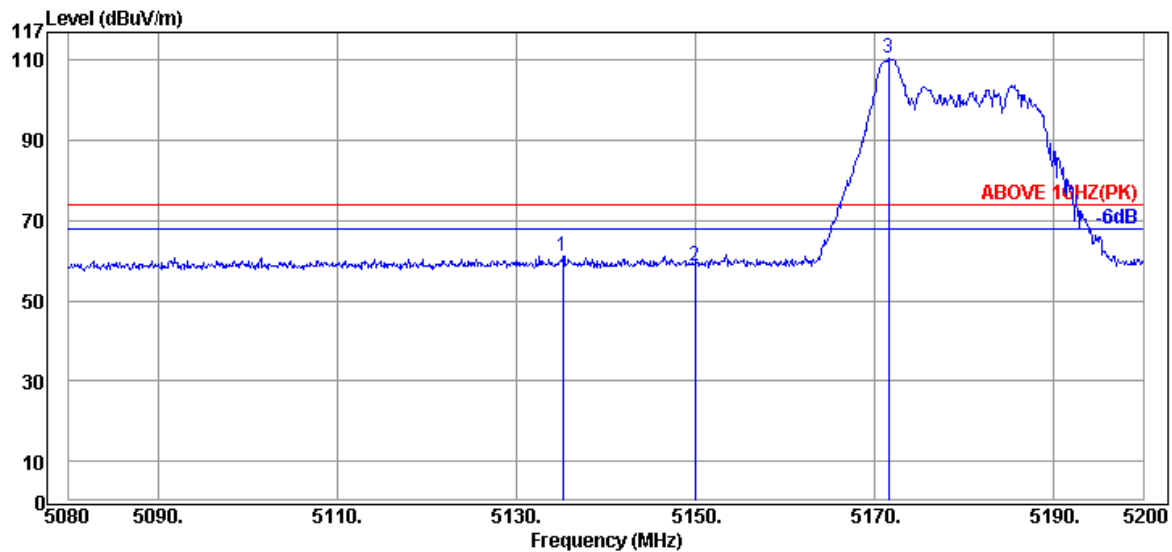

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.20	34.63	10.59	16.01	61.23	74.00	12.77	Peak
5149.96	34.70	10.61	13.51	58.82	74.00	15.18	Peak
@ 5171.56	34.63	10.62	65.21	110.46	---	---	Peak

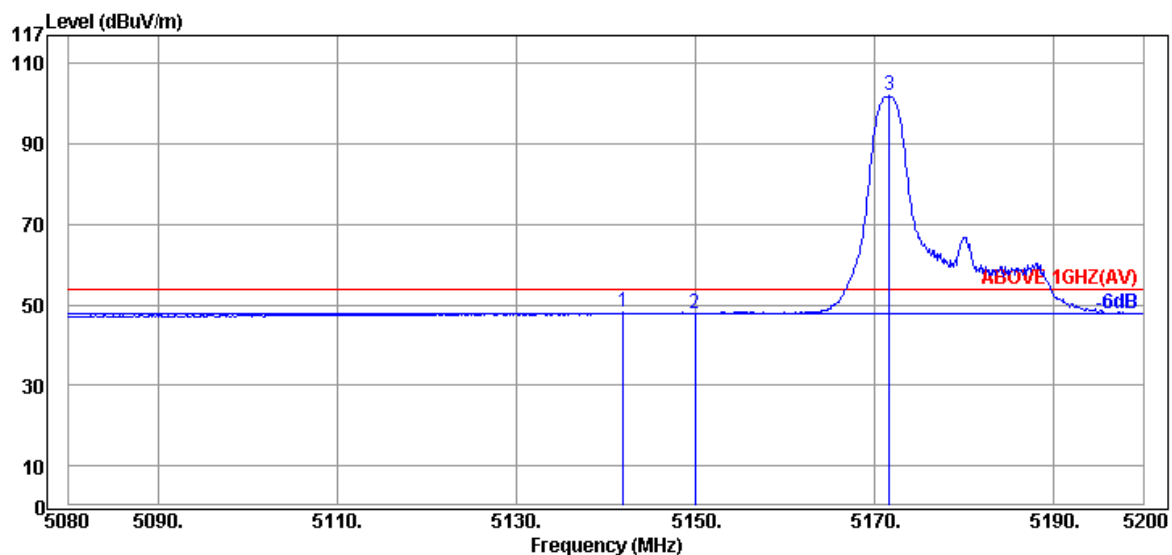

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.92	34.70	10.61	2.81	48.12	54.00	5.88	Average
5149.96	34.70	10.61	2.50	47.81	54.00	6.19	Average
@ 5171.68	34.63	10.62	56.74	101.99	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

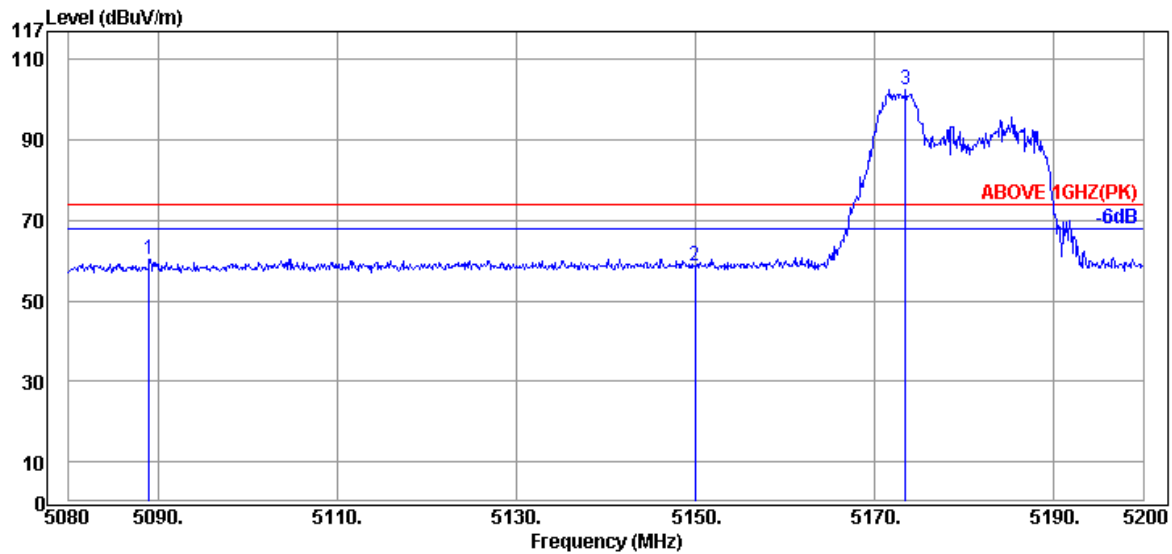

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5089.00	34.50	10.57	15.42	60.49	74.00	13.51	Peak
5149.96	34.70	10.61	13.46	58.77	74.00	15.23	Peak
@ 5173.48	34.63	10.62	57.17	102.42	---	---	Peak

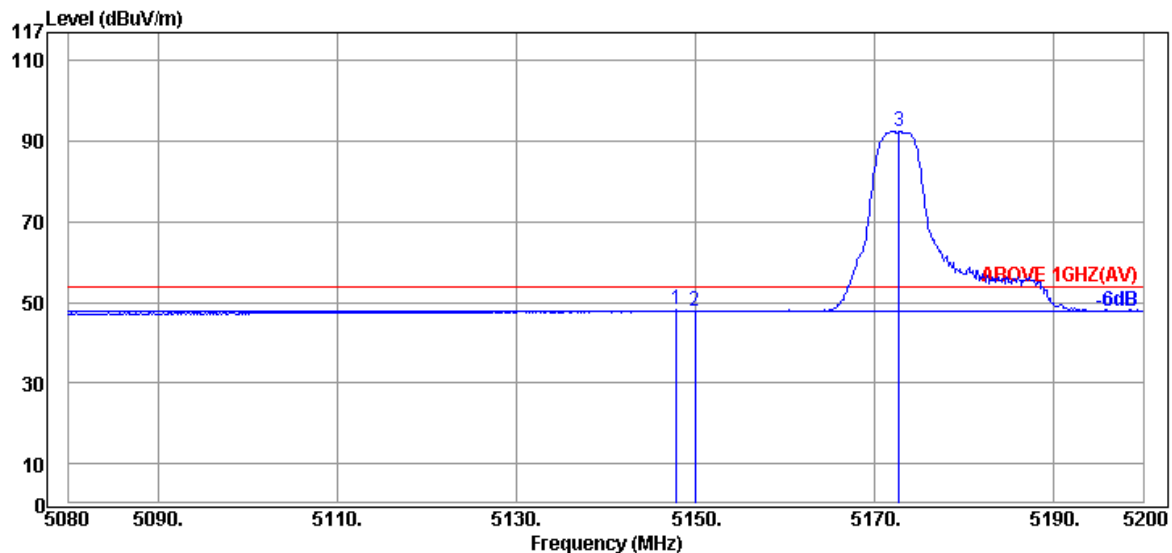

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.92	34.70	10.61	2.74	48.05	54.00	5.95	Average
5149.96	34.70	10.61	2.52	47.83	54.00	6.17	Average
@ 5172.76	34.63	10.62	47.24	92.49	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

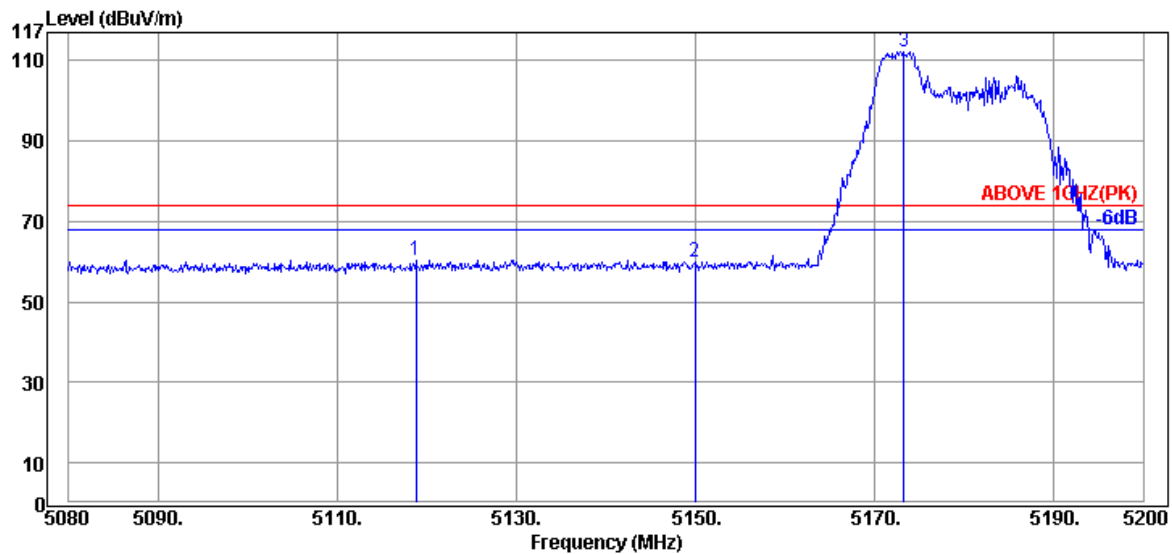

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.76	34.57	10.58	15.24	60.39	74.00	13.61	Peak
5149.96	34.70	10.61	14.50	59.81	74.00	14.19	Peak
@ 5173.24	34.63	10.62	66.94	112.19	---	---	Peak

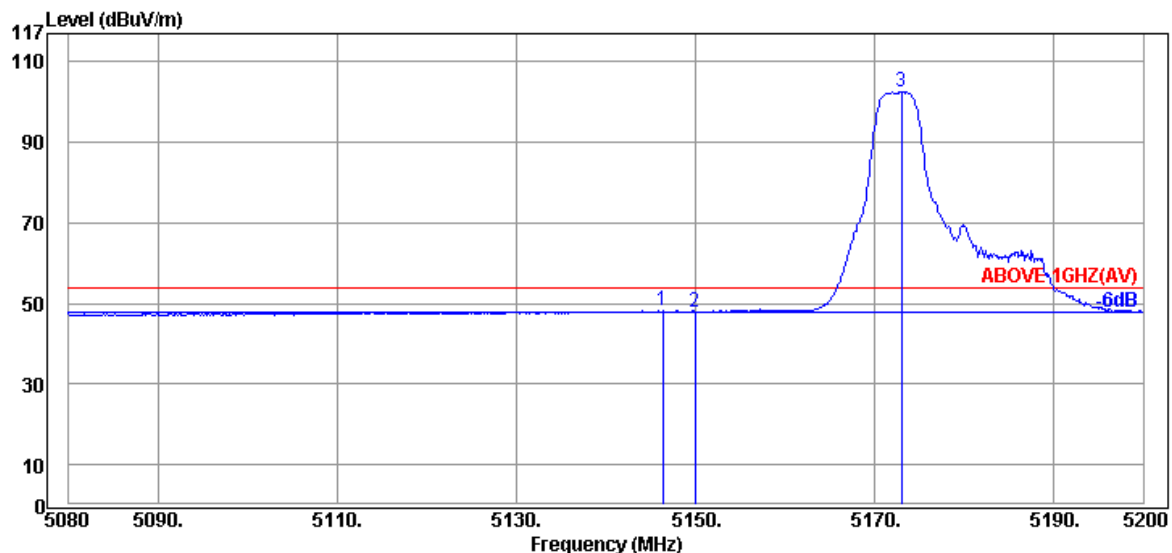

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.36	34.70	10.61	2.91	48.22	54.00	5.78	Average
5149.96	34.70	10.61	2.52	47.83	54.00	6.17	Average
@ 5173.00	34.63	10.62	57.38	102.63	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

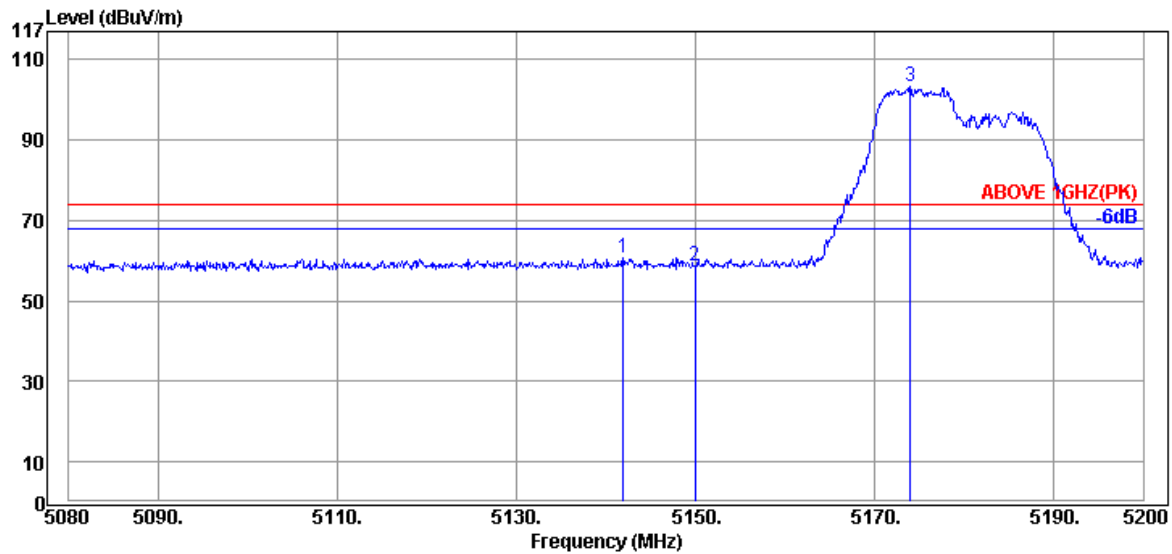

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.92	34.70	10.61	15.33	60.64	74.00	13.36	Peak
5149.96	34.70	10.61	13.48	58.79	74.00	15.21	Peak
@ 5173.96	34.57	10.63	58.08	103.28	---	---	Peak

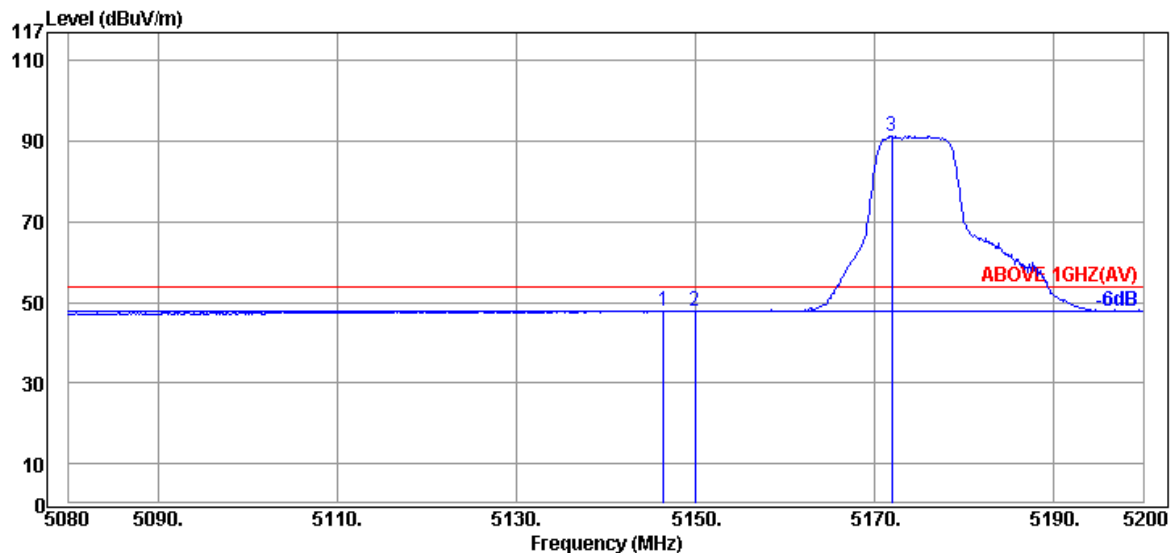

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.48	34.70	10.61	2.68	47.99	54.00	6.01	Average
5149.96	34.70	10.61	2.60	47.91	54.00	6.09	Average
@ 5171.92	34.63	10.62	46.01	91.26	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

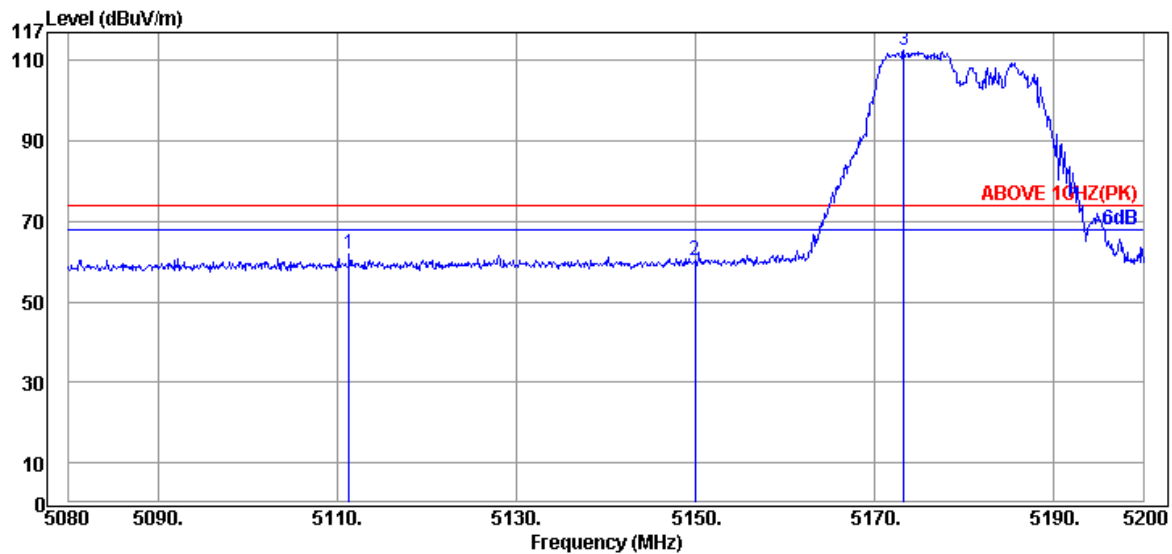

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.32	34.57	10.58	16.75	61.90	74.00	12.10	Peak
5149.96	34.70	10.61	14.95	60.26	74.00	13.74	Peak
@ 5173.24	34.63	10.62	67.25	112.50	---	---	Peak

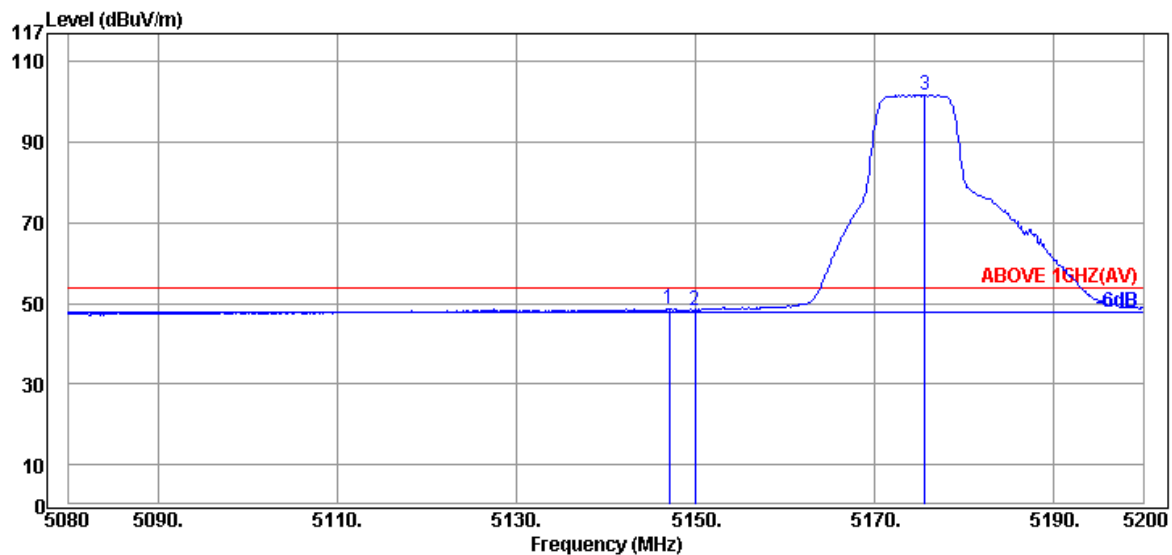

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.08	34.70	10.61	3.25	48.56	54.00	5.44	Average
5149.96	34.70	10.61	3.14	48.45	54.00	5.55	Average
@ 5175.64	34.57	10.63	56.57	101.77	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	26/8	Frequency	TX 5320MHz

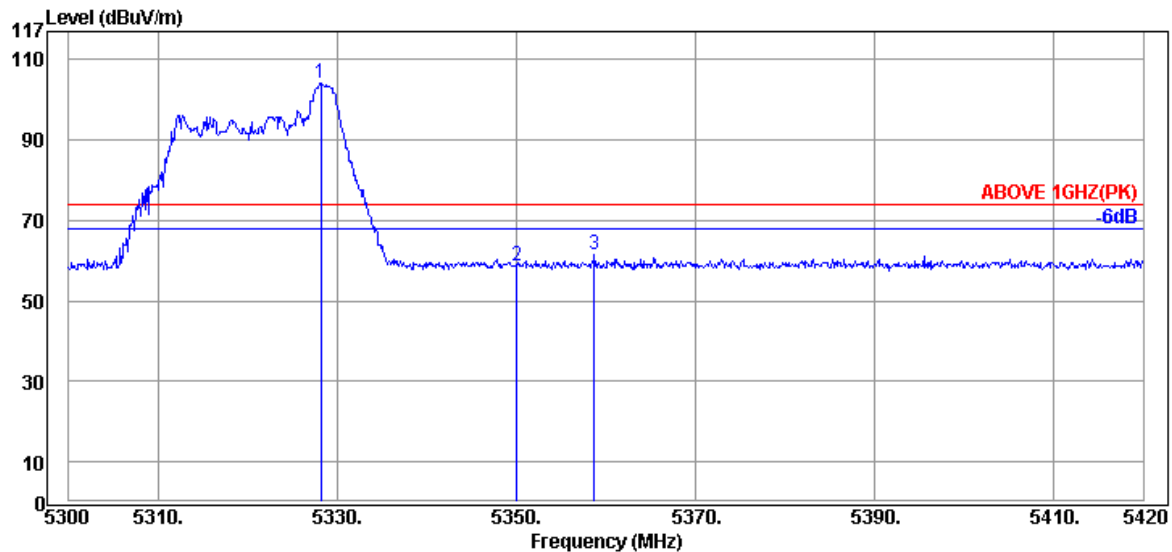

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.20	34.73	10.75	58.66	104.14	---	---	Peak
	5350.04	34.80	10.76	13.05	58.61	74.00	15.39	Peak
	5358.68	34.80	10.76	16.09	61.65	74.00	12.35	Peak

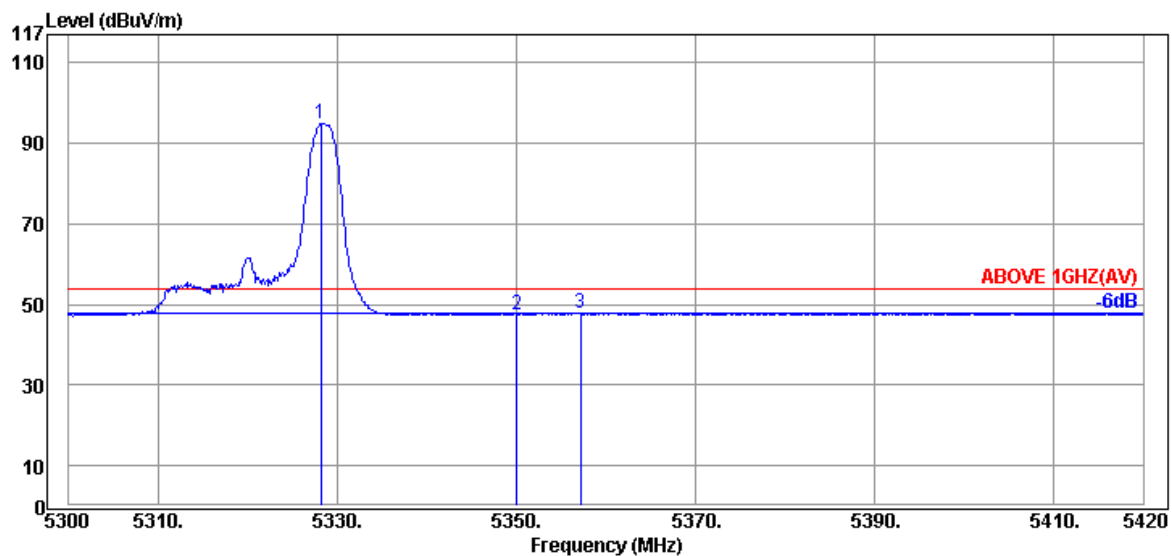

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.20	34.73	10.75	49.37	94.85	---	---	Average
	5350.04	34.80	10.76	2.03	47.59	54.00	6.41	Average
	5357.12	34.80	10.76	2.34	47.90	54.00	6.10	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	26/8	Frequency	TX 5320MHz

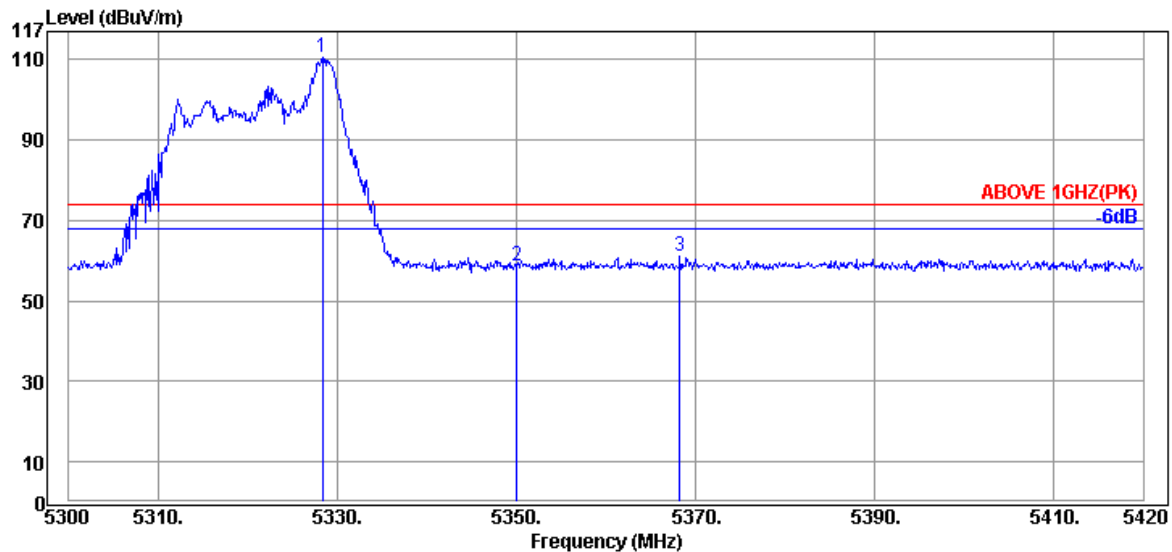

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.32	34.73	10.75	64.89	110.37	---	---	Peak
	5350.04	34.80	10.76	13.01	58.57	74.00	15.43	Peak
	5368.28	34.83	10.78	15.53	61.14	74.00	12.86	Peak

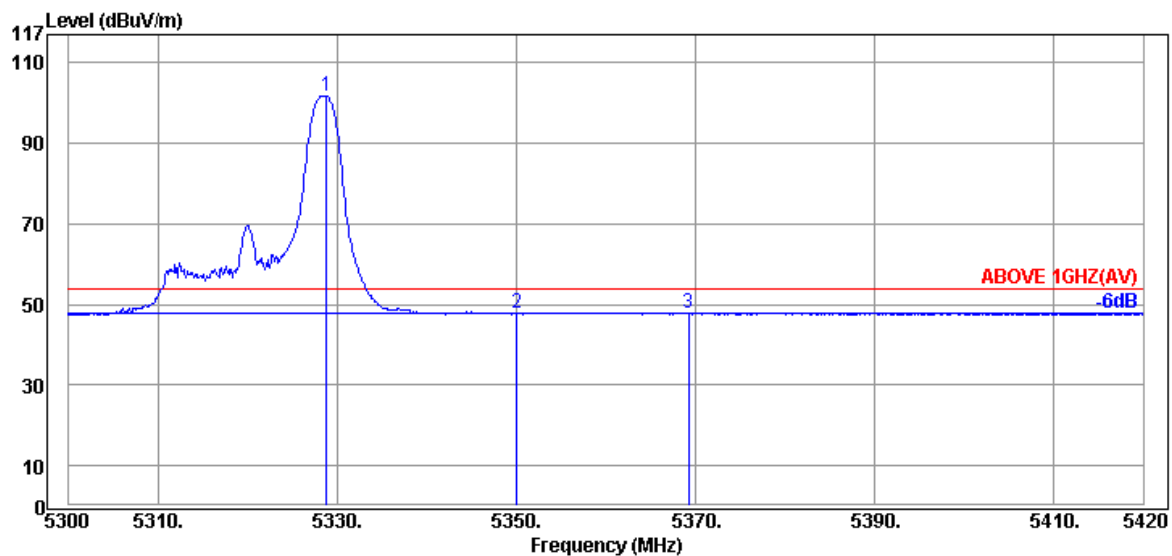

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.80	34.73	10.75	56.38	101.86	---	---	Average
	5350.04	34.80	10.76	2.18	47.74	54.00	6.26	Average
	5369.24	34.83	10.78	2.41	48.02	54.00	5.98	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	52/40	Frequency	TX 5320MHz

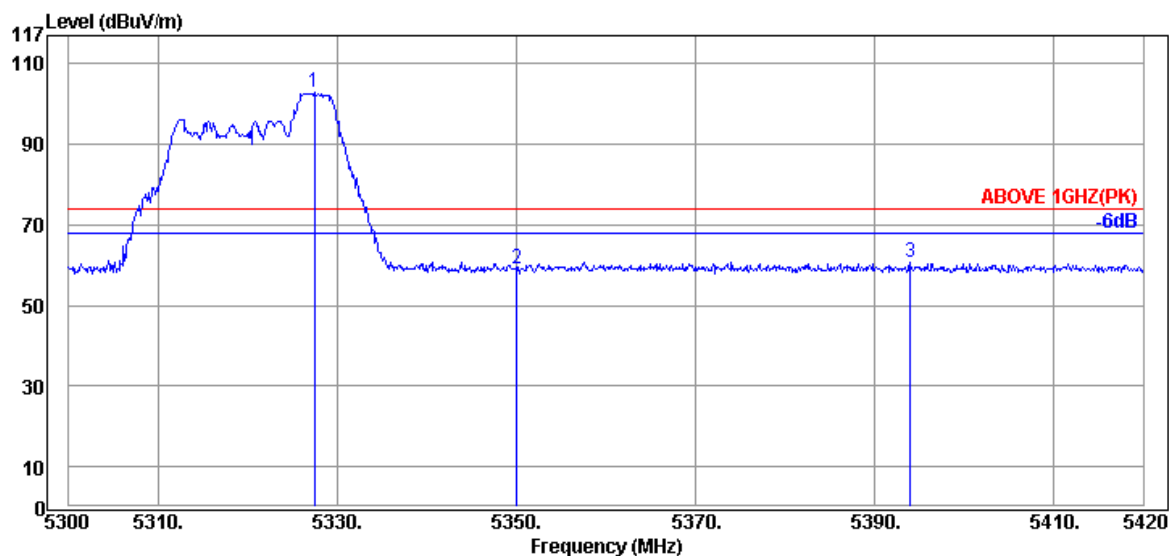

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.48	34.73	10.75	57.53	103.01	---	---	Peak
5350.04	34.80	10.76	13.37	58.93	74.00	15.07	Peak
5393.96	34.87	10.79	15.15	60.81	74.00	13.19	Peak

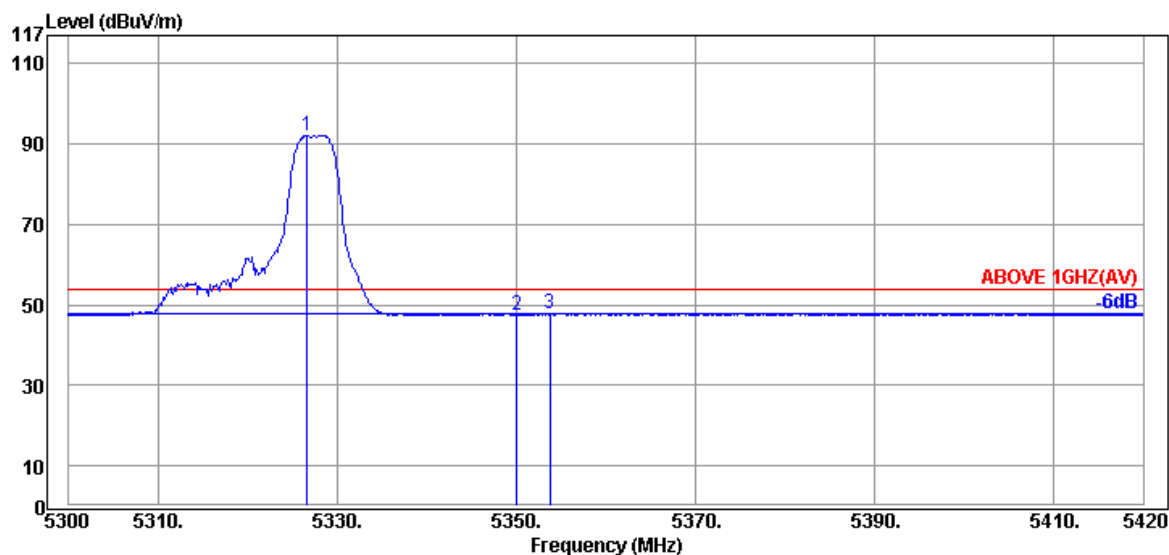

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.64	34.73	10.75	46.63	92.11	---	---	Average
5350.04	34.80	10.76	2.03	47.59	54.00	6.41	Average
5353.76	34.80	10.76	2.45	48.01	54.00	5.99	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	52/40	Frequency	TX 5320MHz

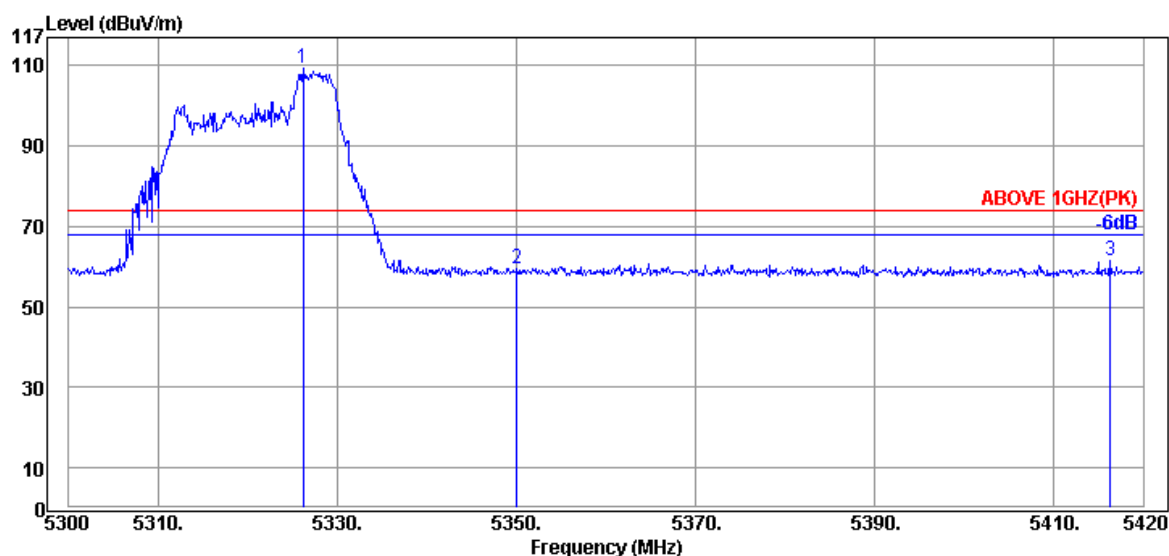

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.16	34.67	10.74	63.78	109.19	---	---	Peak
	5350.04	34.80	10.76	13.86	59.42	74.00	14.58	Peak
	5416.28	34.83	10.82	15.83	61.48	74.00	12.52	Peak

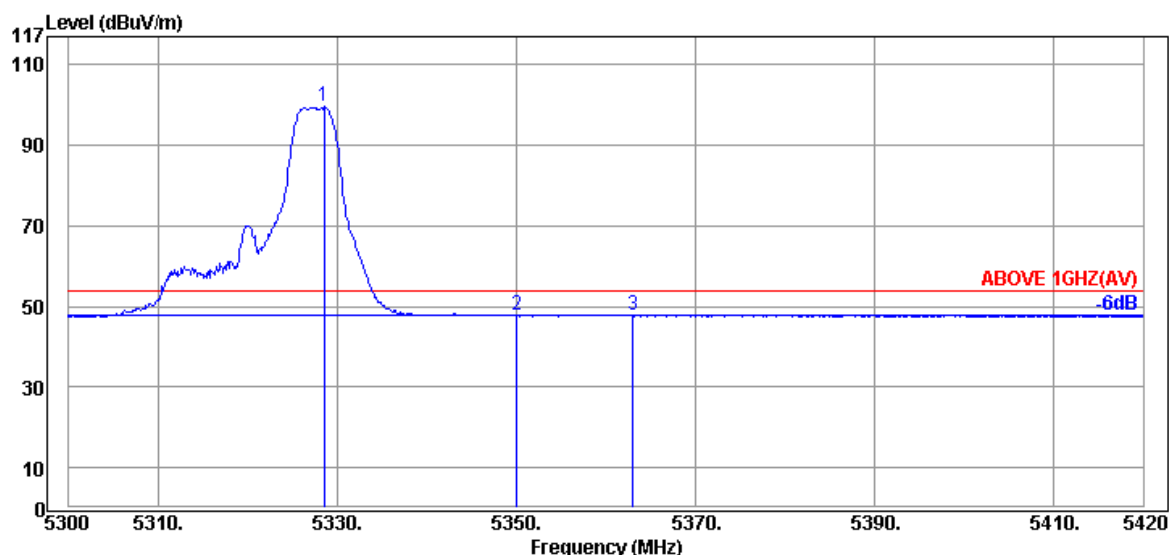

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.56	34.73	10.75	54.06	99.54	---	---	Average
	5350.04	34.80	10.76	2.18	47.74	54.00	6.26	Average
	5363.00	34.83	10.78	2.42	48.03	54.00	5.97	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	106/54	Frequency	TX 5320MHz

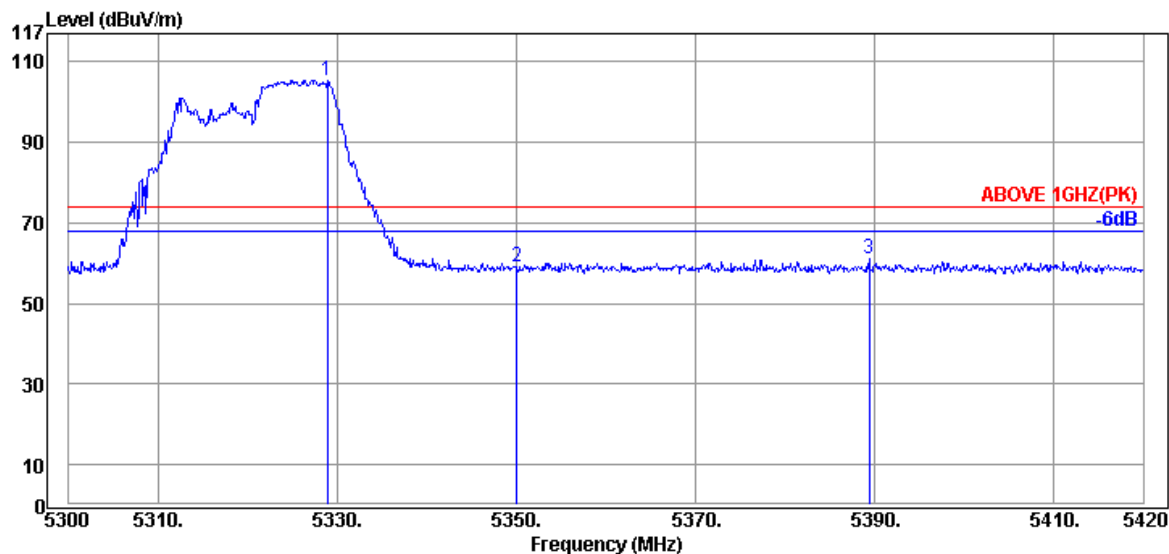

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.92	34.73	10.75	59.86	105.34	---	---	Peak
5350.04	34.80	10.76	13.57	59.13	74.00	14.87	Peak
5389.40	34.87	10.79	15.45	61.11	74.00	12.89	Peak

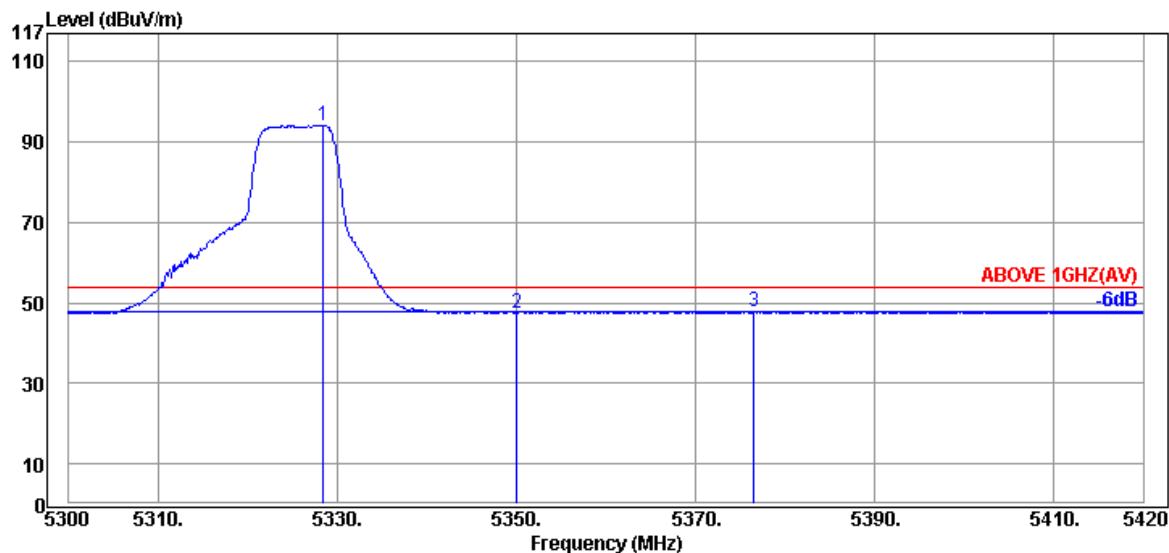

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.44	34.73	10.75	48.72	94.20	---	---	Average
5350.04	34.80	10.76	2.02	47.58	54.00	6.42	Average
5376.56	34.83	10.78	2.33	47.94	54.00	6.06	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	106/54	Frequency	TX 5320MHz

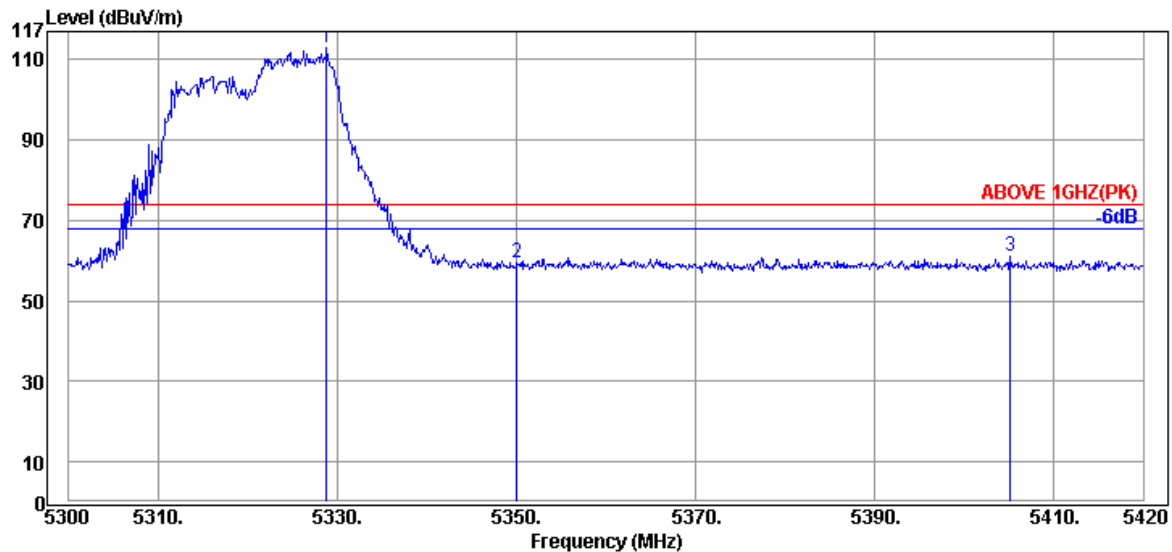

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.80	34.73	10.75	67.48	112.96	---	---	Peak
	5350.04	34.80	10.76	13.79	59.35	74.00	14.65	Peak
	5405.12	34.90	10.80	15.55	61.25	74.00	12.75	Peak

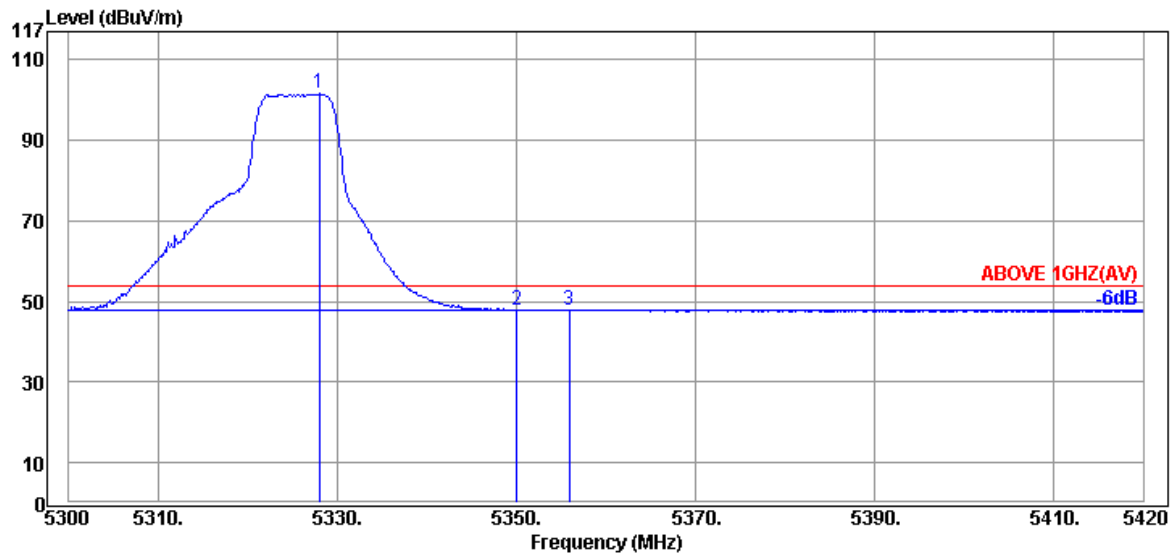

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.96	34.73	10.75	56.04	101.52	---	---	Average
	5350.04	34.80	10.76	2.30	47.86	54.00	6.14	Average
	5355.92	34.80	10.76	2.45	48.01	54.00	5.99	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	26/0	Frequency	TX 5500MHz

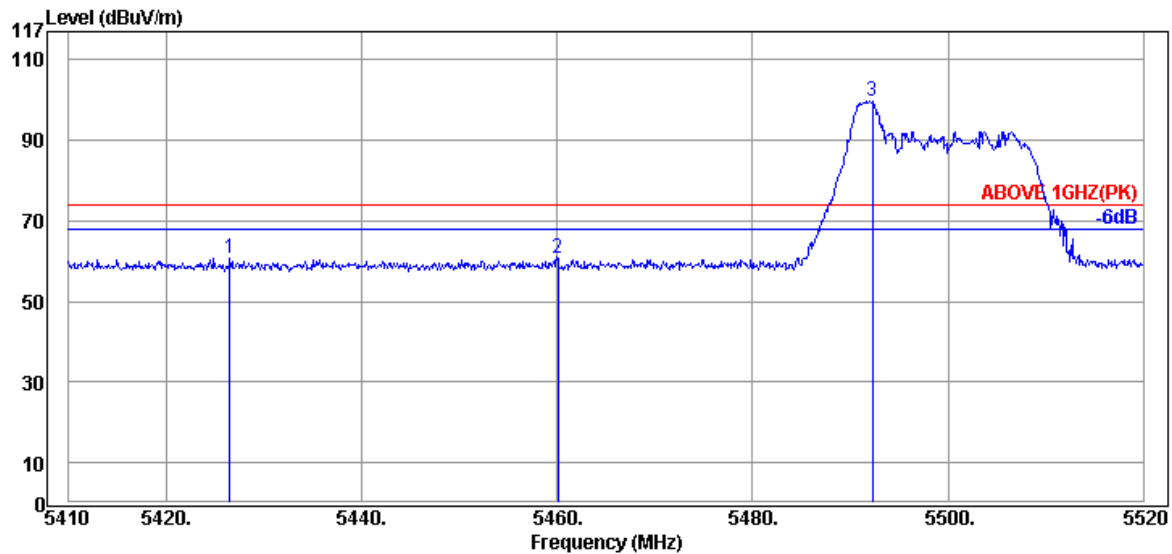

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.50	34.83	10.82	15.22	60.87	74.00	13.13	Peak
5460.05	34.70	10.84	15.09	60.63	74.00	13.37	Peak
@ 5492.28	34.63	10.87	54.21	99.71	---	---	Peak

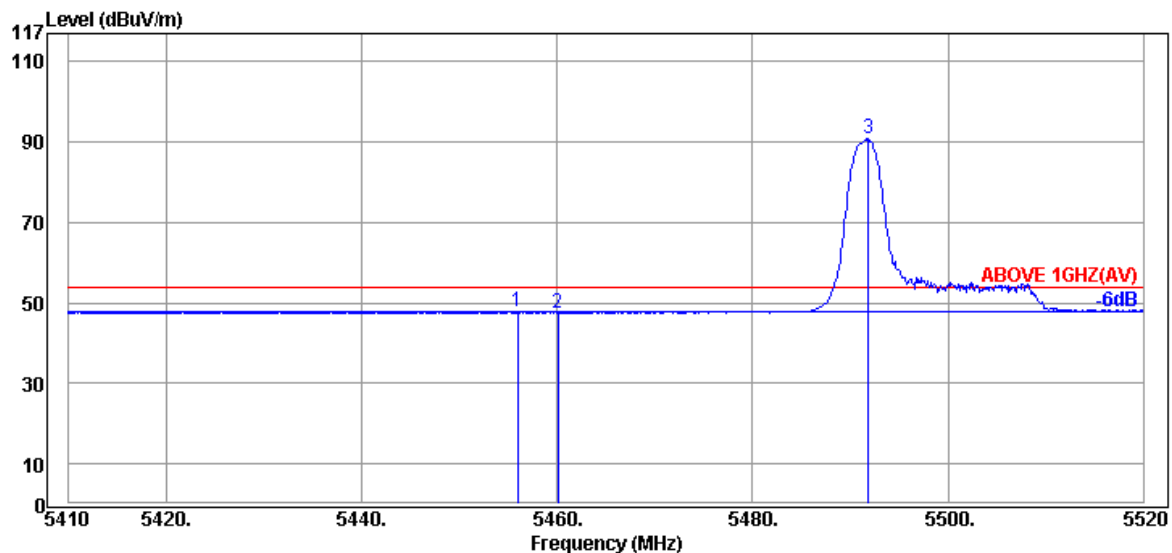

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.98	34.70	10.84	2.32	47.86	54.00	6.14	Average
5460.05	34.70	10.84	2.10	47.64	54.00	6.36	Average
@ 5491.84	34.63	10.87	45.29	90.79	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185

Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	26/0	Frequency	TX 5500MHz

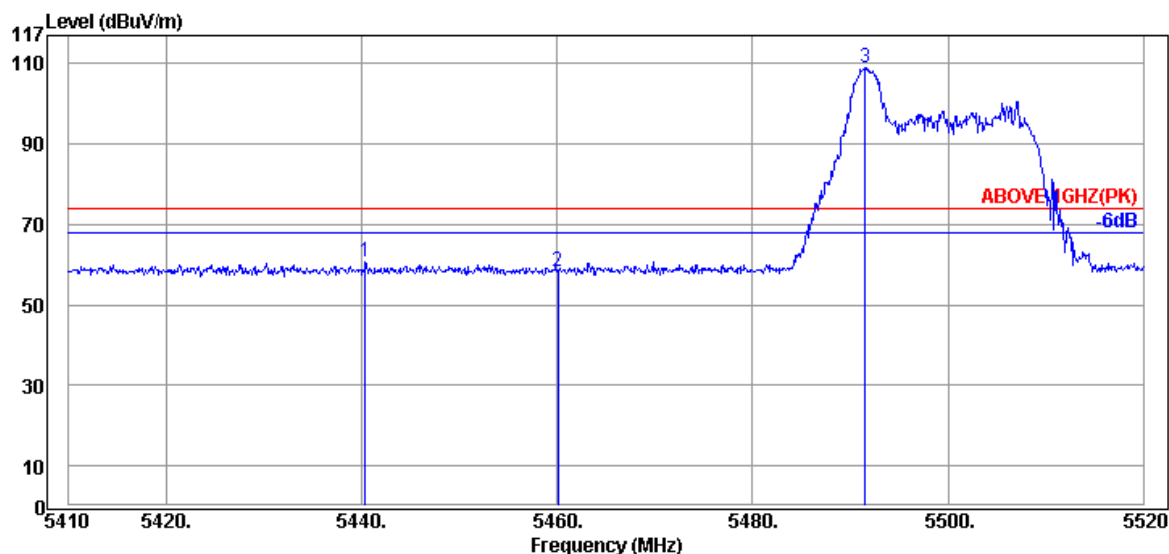

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.36	34.77	10.83	14.92	60.52	74.00	13.48	Peak
5460.05	34.70	10.84	12.69	58.23	74.00	15.77	Peak
@ 5491.51	34.63	10.87	63.47	108.97	---	---	Peak

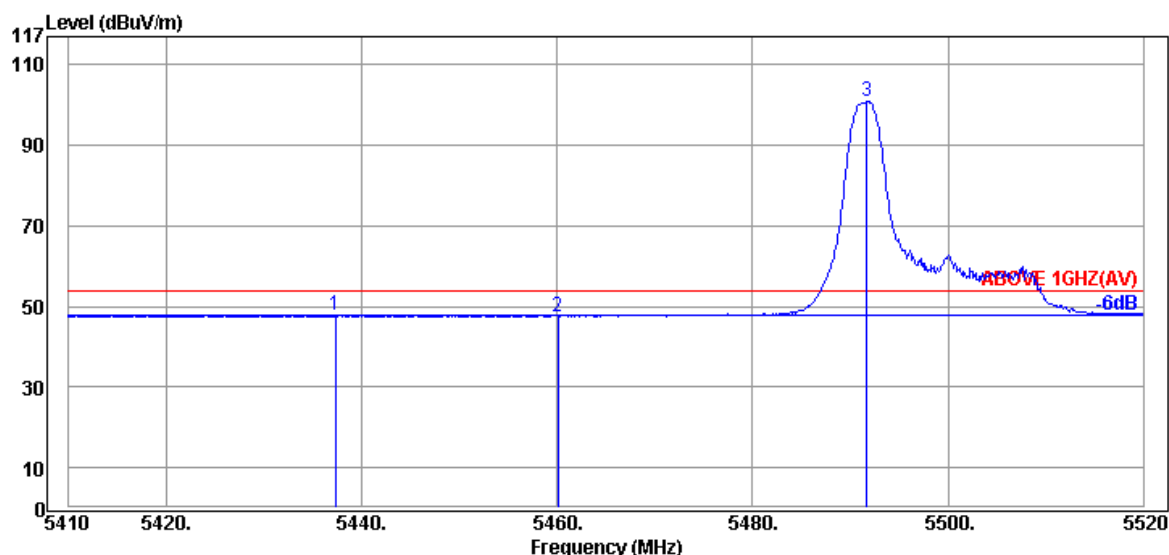

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.28	34.77	10.83	2.25	47.85	54.00	6.15	Average
5460.05	34.70	10.84	2.07	47.61	54.00	6.39	Average
@ 5491.73	34.63	10.87	55.40	100.90	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	52/37	Frequency	TX 5500MHz

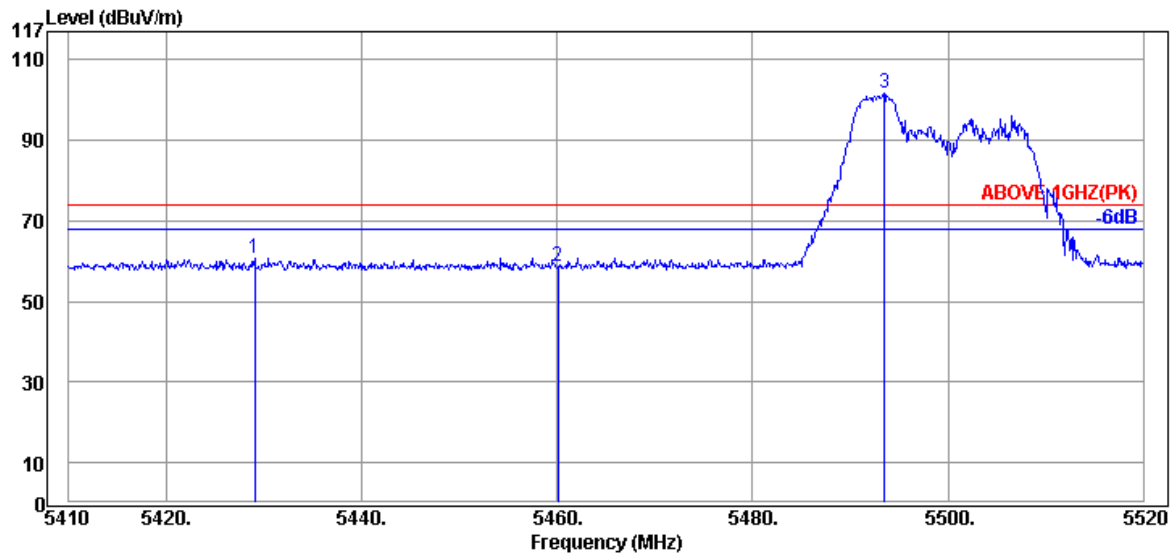

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.03	34.77	10.83	15.25	60.85	74.00	13.15	Peak
5460.05	34.70	10.84	13.08	58.62	74.00	15.38	Peak
@ 5493.49	34.63	10.87	56.14	101.64	---	---	Peak

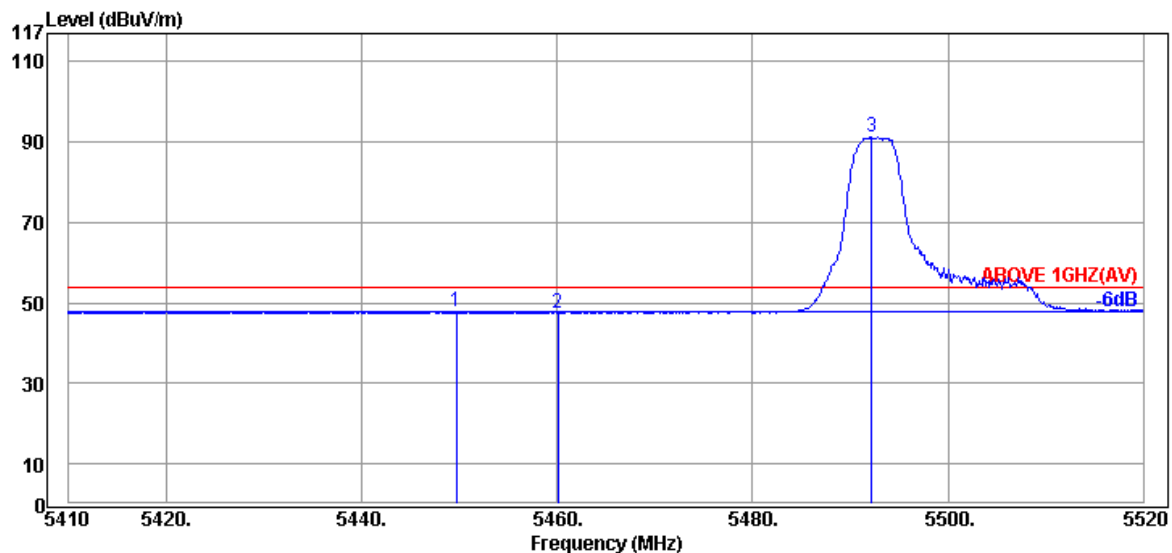

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.71	34.70	10.84	2.33	47.87	54.00	6.13	Average
5460.05	34.70	10.84	1.91	47.45	54.00	6.55	Average
@ 5492.17	34.63	10.87	45.65	91.15	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185

Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	52/37	Frequency	TX 5500MHz

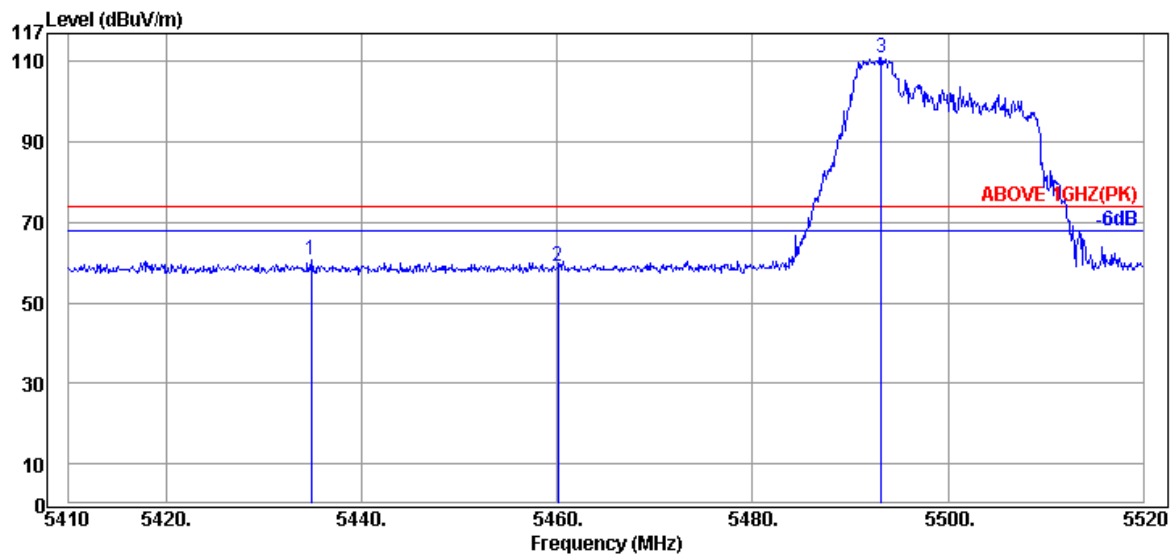

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.86	34.77	10.83	15.01	60.61	74.00	13.39	Peak
5460.05	34.70	10.84	13.67	59.21	74.00	14.79	Peak
@ 5493.16	34.63	10.87	65.58	111.08	---	---	Peak

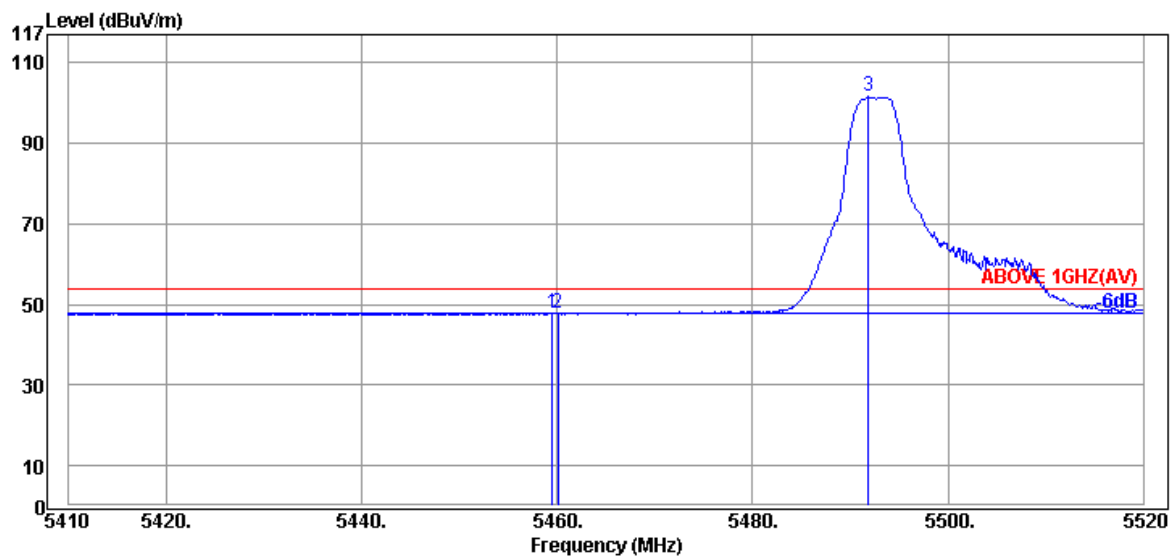

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.50	34.70	10.84	2.40	47.94	54.00	6.06	Average
5460.05	34.70	10.84	2.22	47.76	54.00	6.24	Average
@ 5491.84	34.63	10.87	56.03	101.53	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section..

File Number: CIM1909185

Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	106/53	Frequency	TX 5500MHz

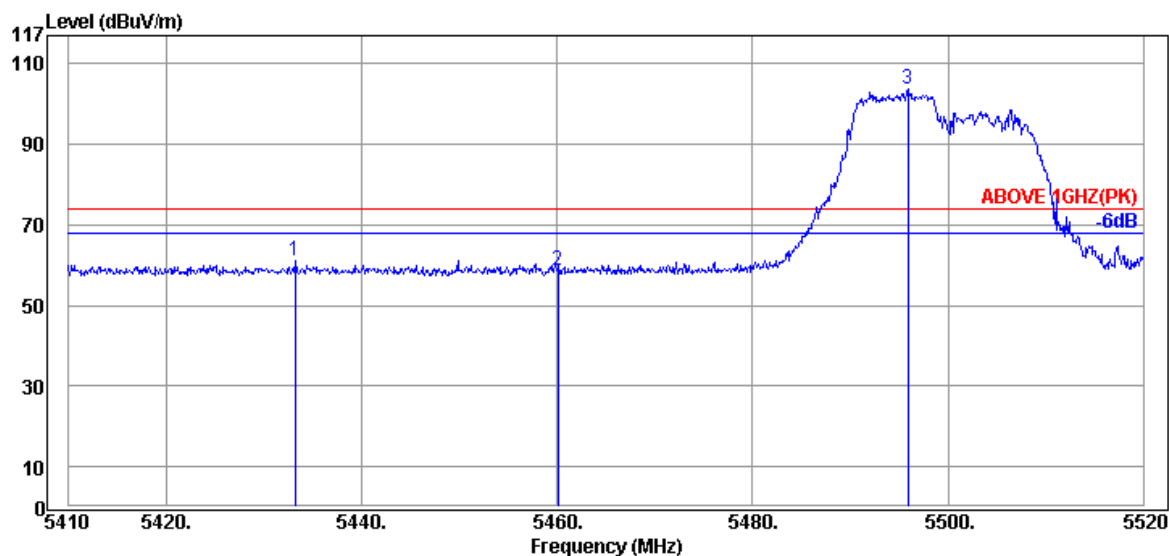

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.21	34.77	10.83	15.64	61.24	74.00	12.76	Peak
5460.05	34.70	10.84	13.25	58.79	74.00	15.21	Peak
@ 5495.91	34.63	10.87	58.14	103.64	---	---	Peak

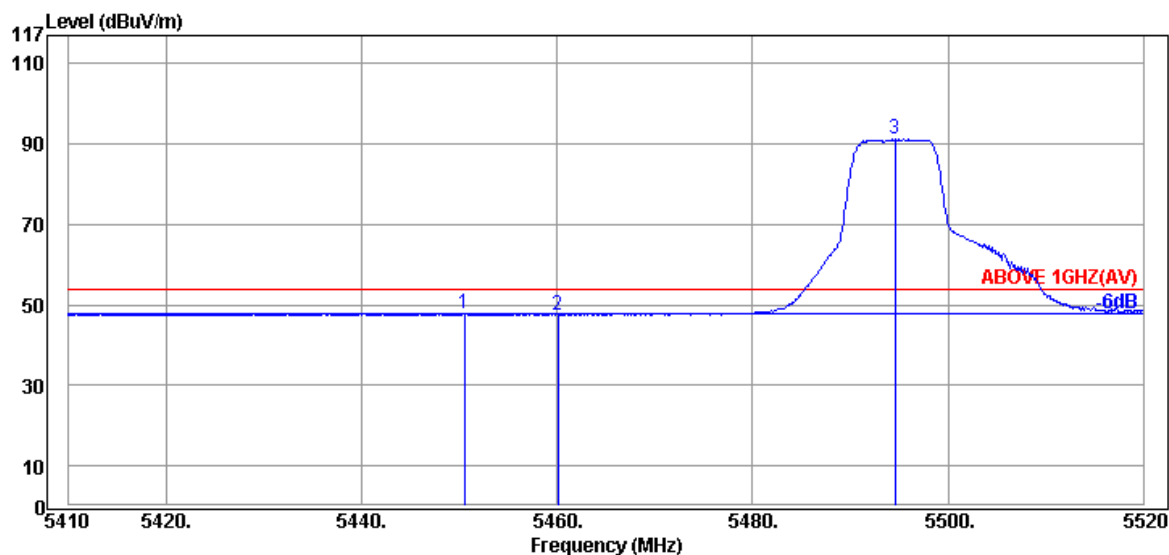

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.48	34.70	10.84	2.44	47.98	54.00	6.02	Average
5460.05	34.70	10.84	1.98	47.52	54.00	6.48	Average
@ 5494.59	34.63	10.87	45.68	91.18	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185


Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	106/53	Frequency	TX 5500MHz

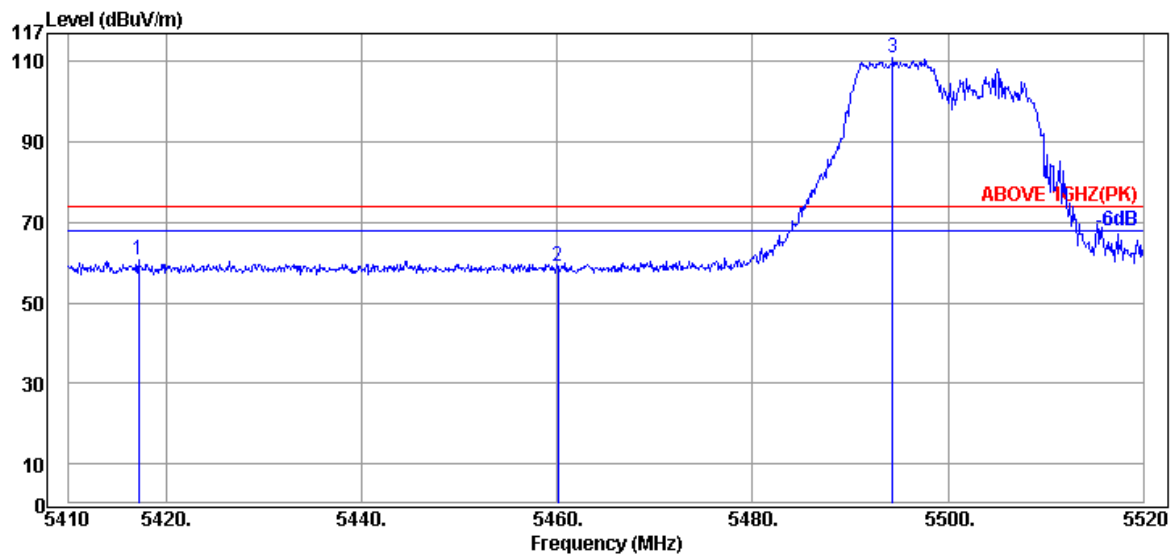

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.15	34.83	10.82	15.05	60.70	74.00	13.30	Peak
5460.05	34.70	10.84	13.62	59.16	74.00	14.84	Peak
@ 5494.37	34.63	10.87	65.30	110.80	---	---	Peak

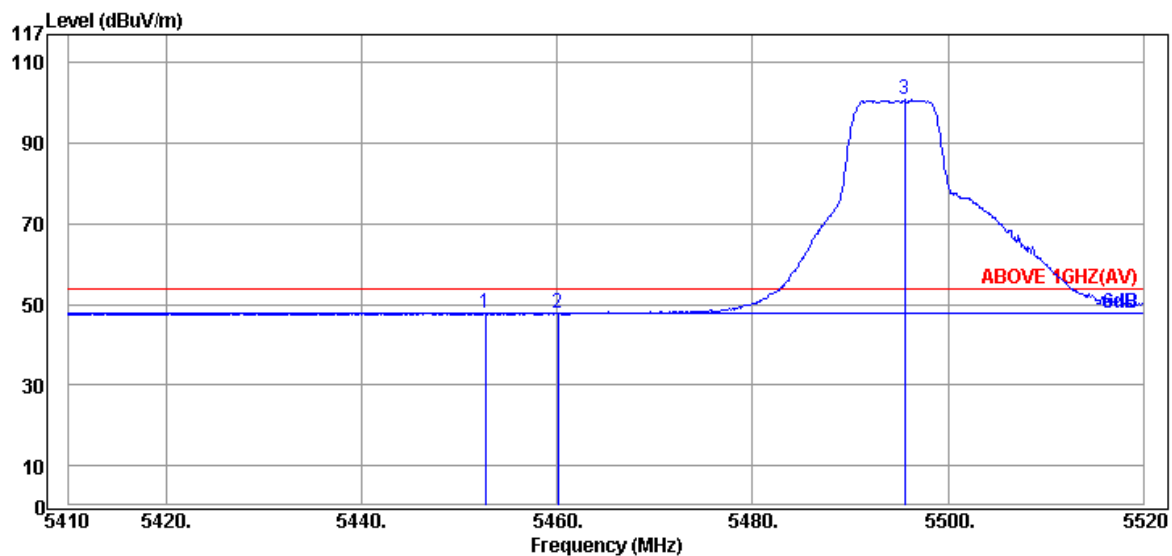

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.68	34.70	10.84	2.43	47.97	54.00	6.03	Average
5460.05	34.70	10.84	2.11	47.65	54.00	6.35	Average
@ 5495.58	34.63	10.87	55.24	100.74	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	26/0	Frequency	TX 5500MHz

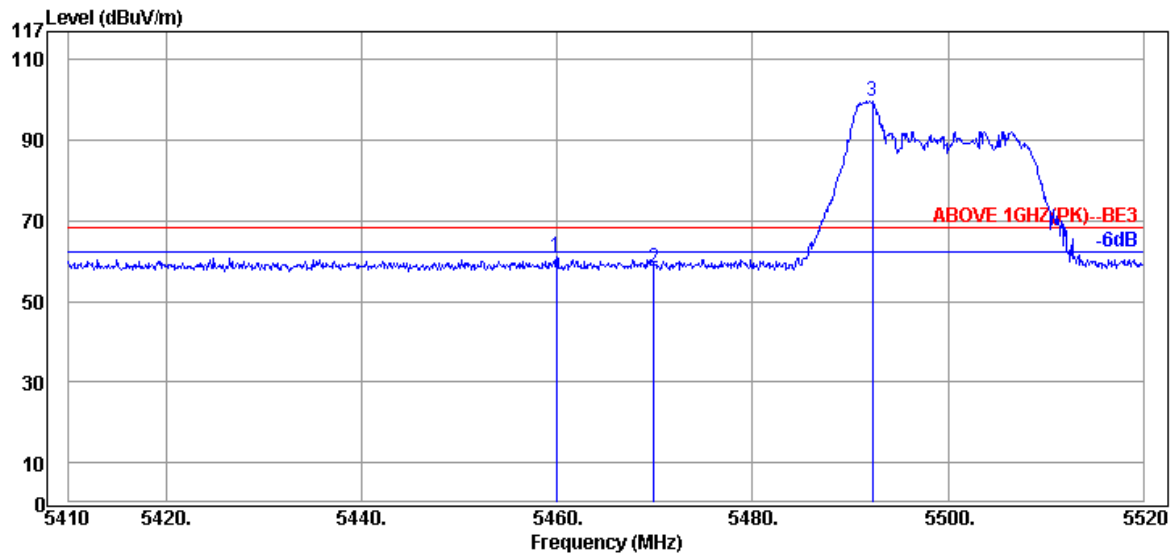

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.94	34.70	10.84	15.60	61.14	68.20	7.06	Peak
5469.95	34.67	10.85	12.93	58.45	68.20	9.75	Peak
@ 5492.28	34.63	10.87	54.21	99.71	---	---	Peak

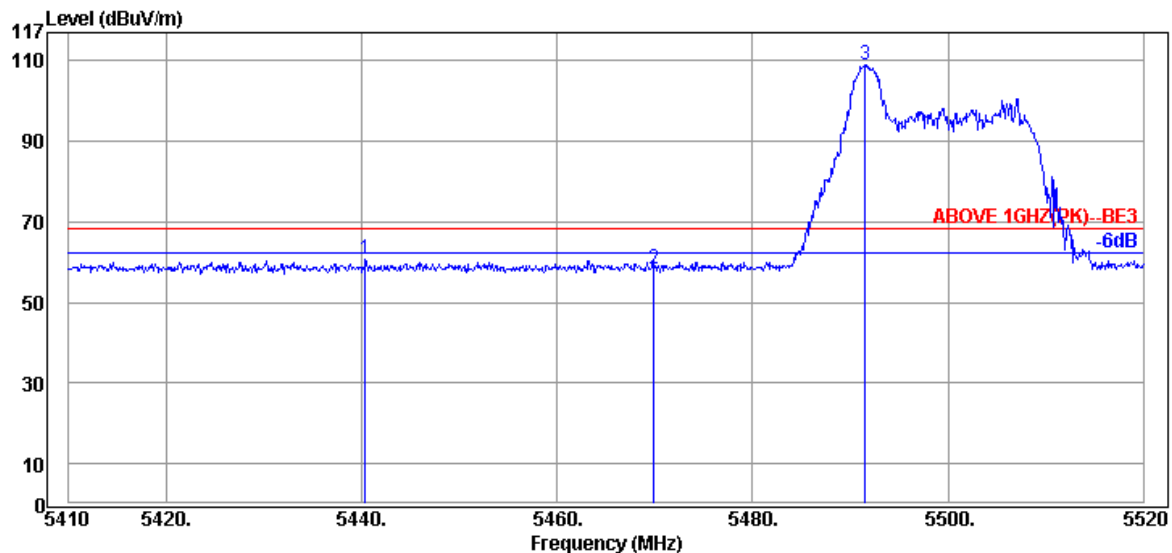

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.36	34.77	10.83	14.92	60.52	68.20	7.68	Peak
5469.95	34.67	10.85	12.77	58.29	68.20	9.91	Peak
@ 5491.51	34.63	10.87	63.47	108.97	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	52/37	Frequency	TX 5500MHz

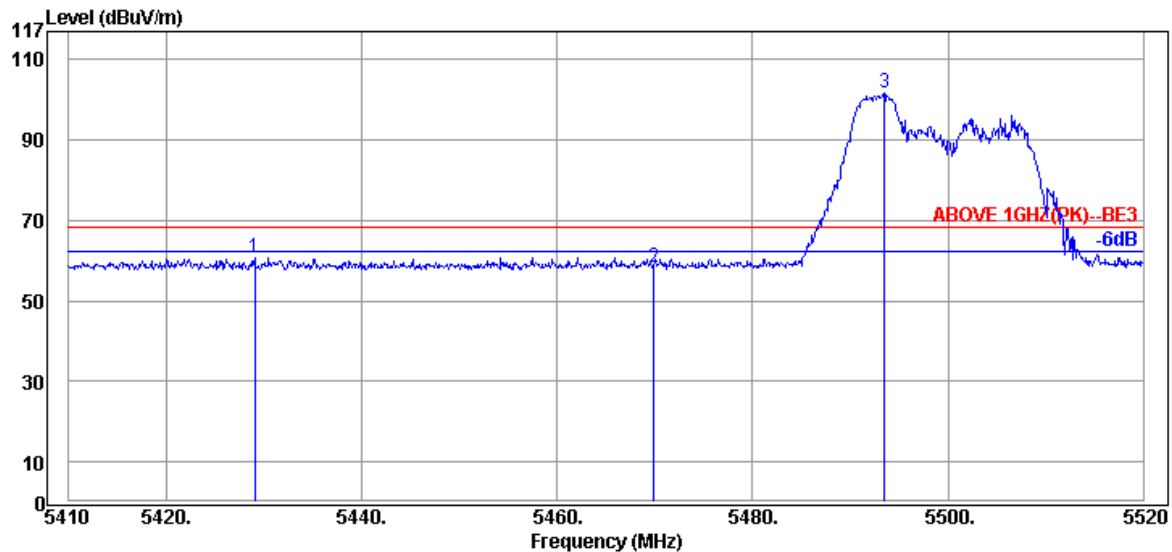

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.03	34.77	10.83	15.25	60.85	68.20	7.35	Peak
5469.95	34.67	10.85	12.76	58.28	68.20	9.92	Peak
@ 5493.49	34.63	10.87	56.14	101.64	---	---	Peak

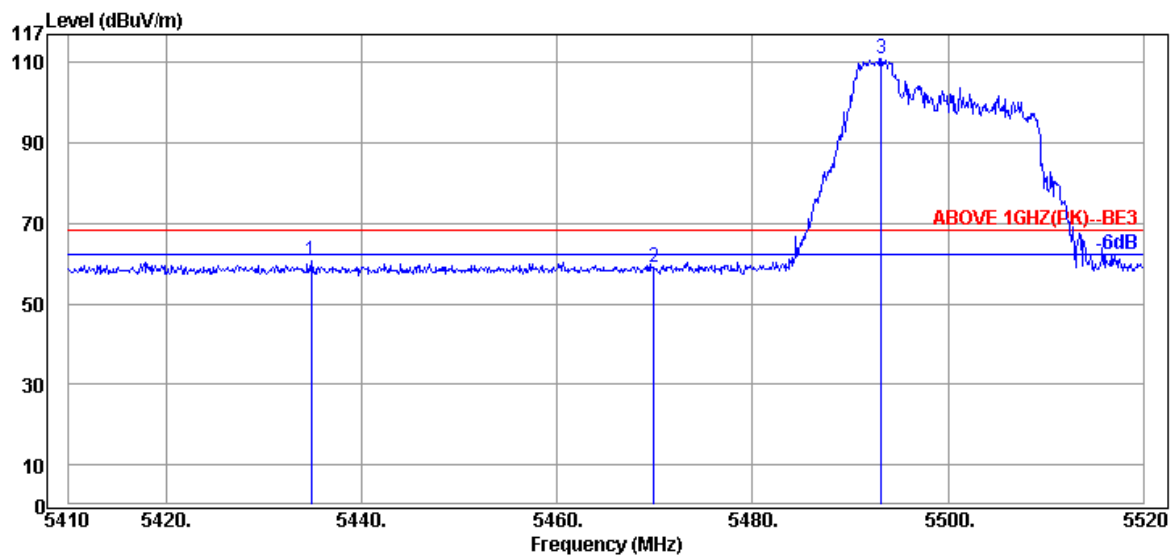

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.86	34.77	10.83	15.01	60.61	68.20	7.59	Peak
5469.95	34.67	10.85	13.72	59.24	68.20	8.96	Peak
@ 5493.16	34.63	10.87	65.58	111.08	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	106/53	Frequency	TX 5500MHz

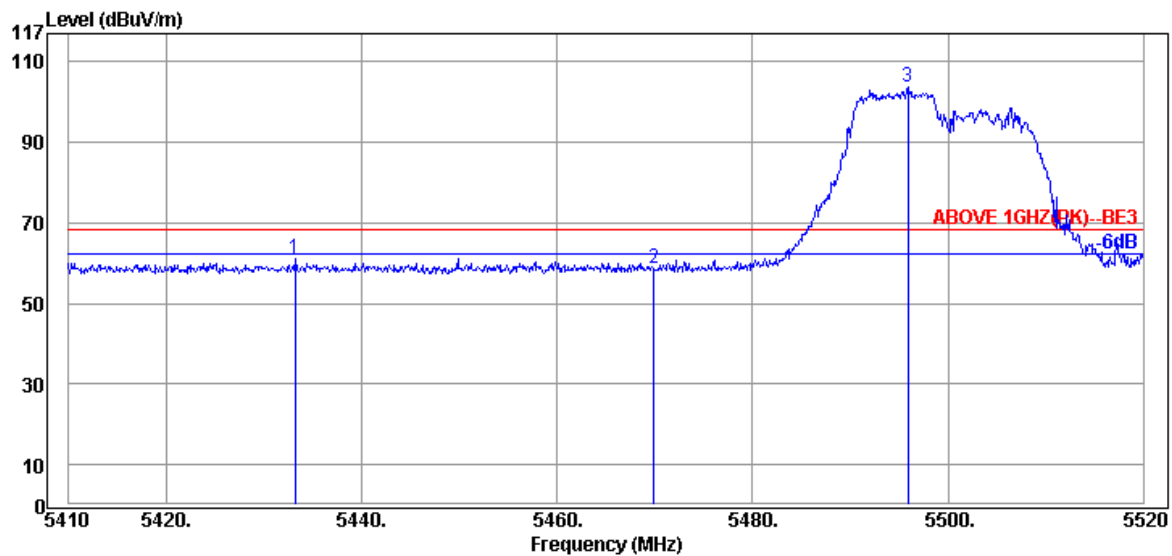

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.21	34.77	10.83	15.64	61.24	68.20	6.96	Peak
5469.95	34.67	10.85	13.10	58.62	68.20	9.58	Peak
@ 5495.91	34.63	10.87	58.14	103.64	---	---	Peak

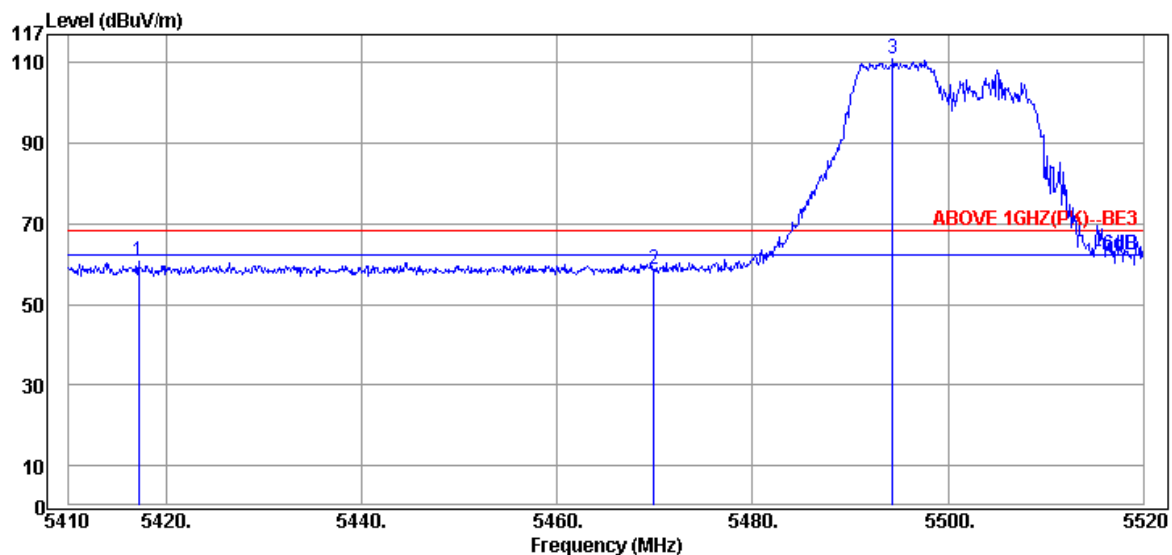

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.15	34.83	10.82	15.05	60.70	68.20	7.50	Peak
5469.95	34.67	10.85	13.11	58.63	68.20	9.57	Peak
@ 5494.37	34.63	10.87	65.30	110.80	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	26/8	Frequency	TX 5700MHz

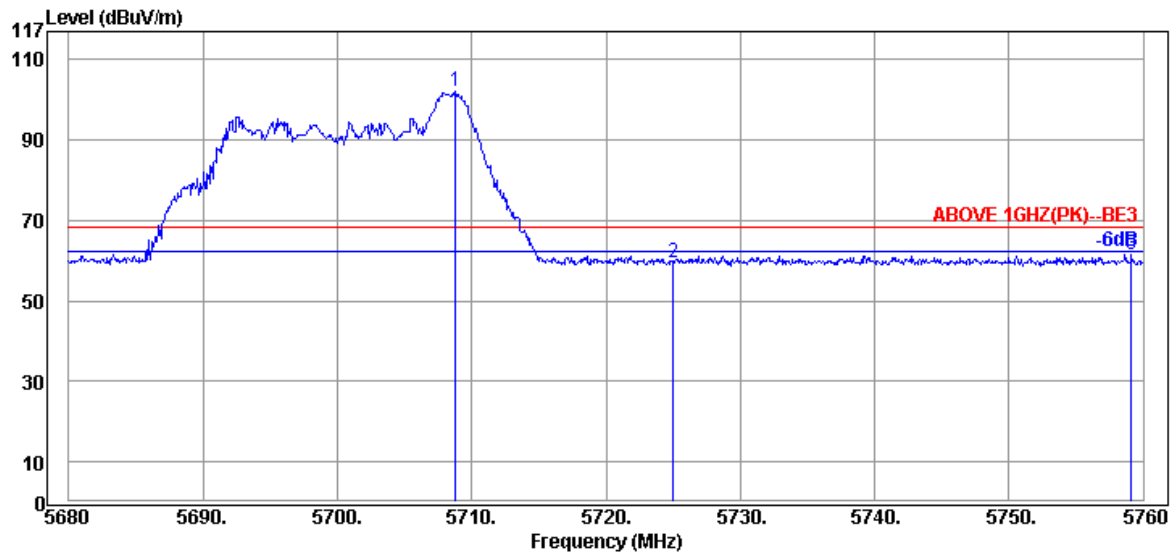

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.80	34.87	10.90	56.41	102.18	---	---	Peak
	5725.04	34.83	10.91	13.65	59.39	68.20	8.81	Peak
	5759.12	34.87	10.91	15.89	61.67	68.20	6.53	Peak

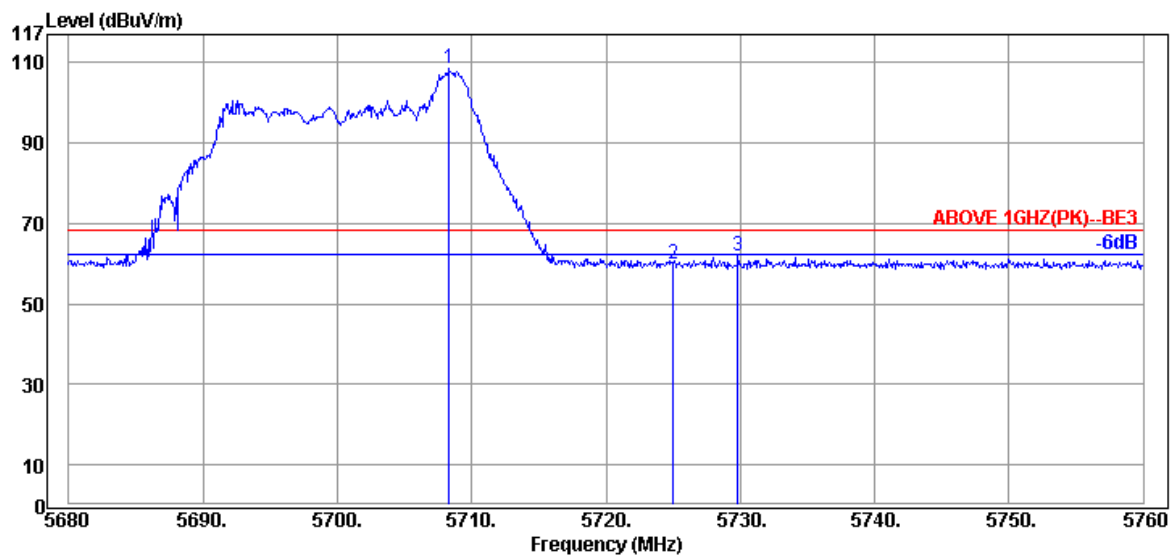

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.32	34.87	10.90	62.67	108.44	---	---	Peak
	5725.04	34.83	10.91	14.05	59.79	68.20	8.41	Peak
	5729.84	34.83	10.91	16.00	61.74	68.20	6.46	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	52/40	Frequency	TX 5700MHz

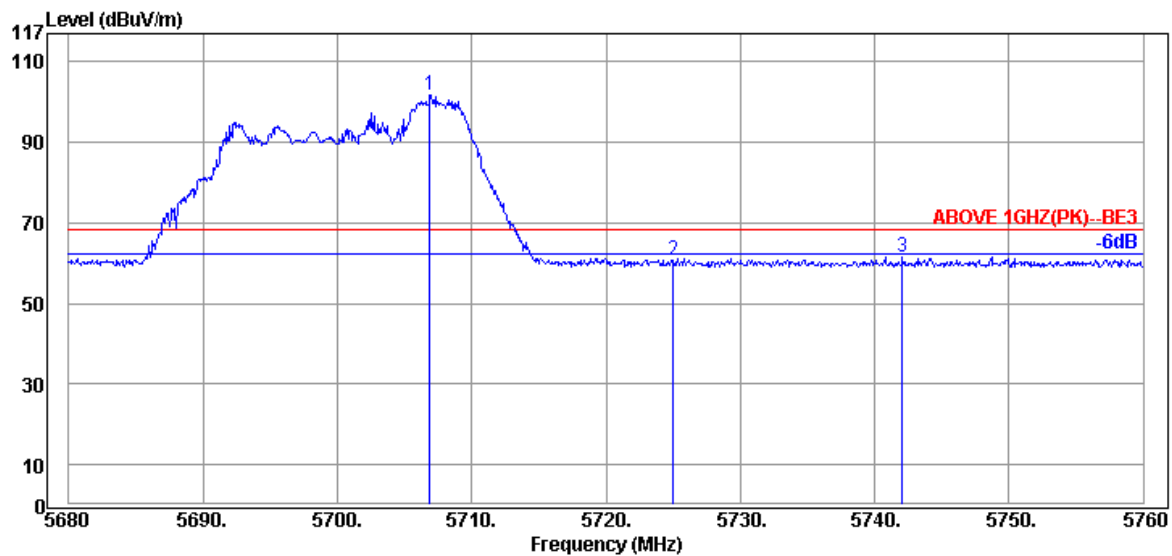

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.88	34.87	10.90	56.08	101.85	---	---	Peak
	5725.04	34.83	10.91	14.85	60.59	68.20	7.61	Peak
	5742.08	34.80	10.91	15.80	61.51	68.20	6.69	Peak

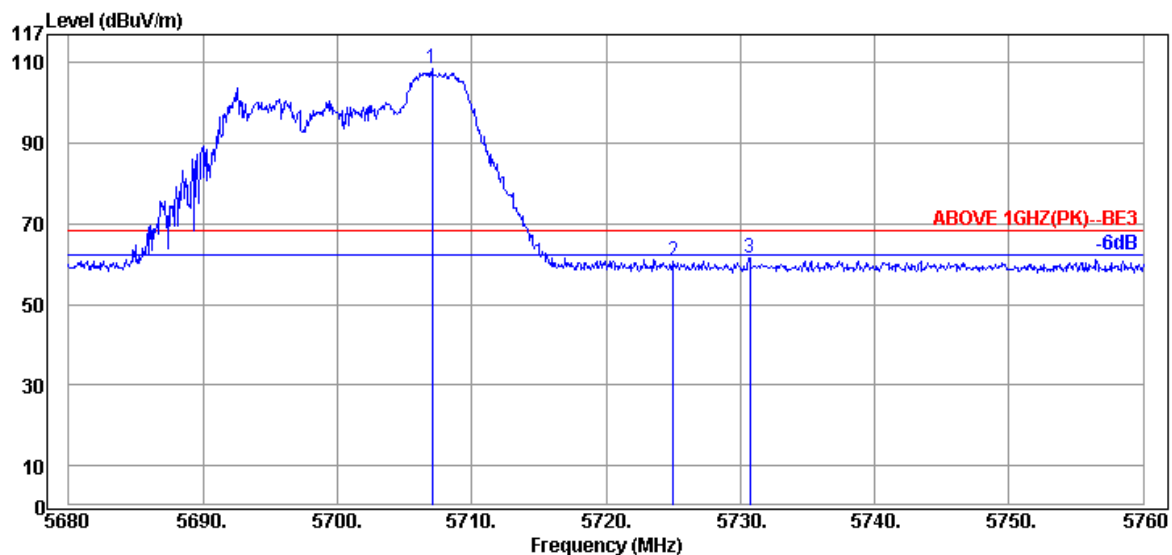

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.04	34.87	10.90	62.64	108.41	---	---	Peak
	5725.04	34.83	10.91	14.88	60.62	68.20	7.58	Peak
	5730.72	34.83	10.91	15.92	61.66	68.20	6.54	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	106/54	Frequency	TX 5700MHz

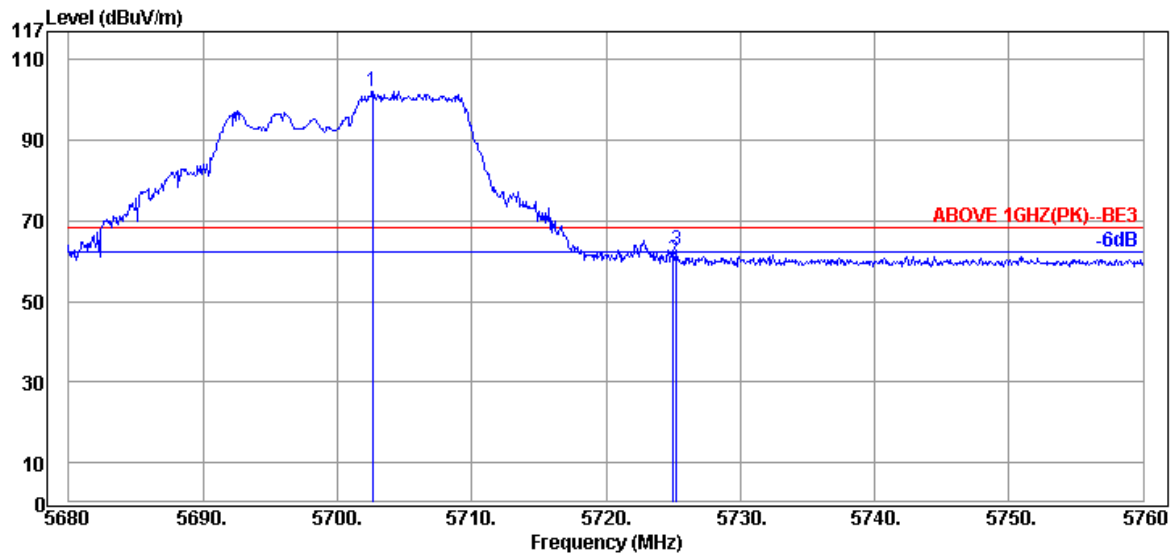

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.64	34.87	10.90	56.51	102.28	---	---	Peak
5725.04	34.83	10.91	14.55	60.29	68.20	7.91	Peak
5725.28	34.83	10.91	16.91	62.65	68.20	5.55	Peak

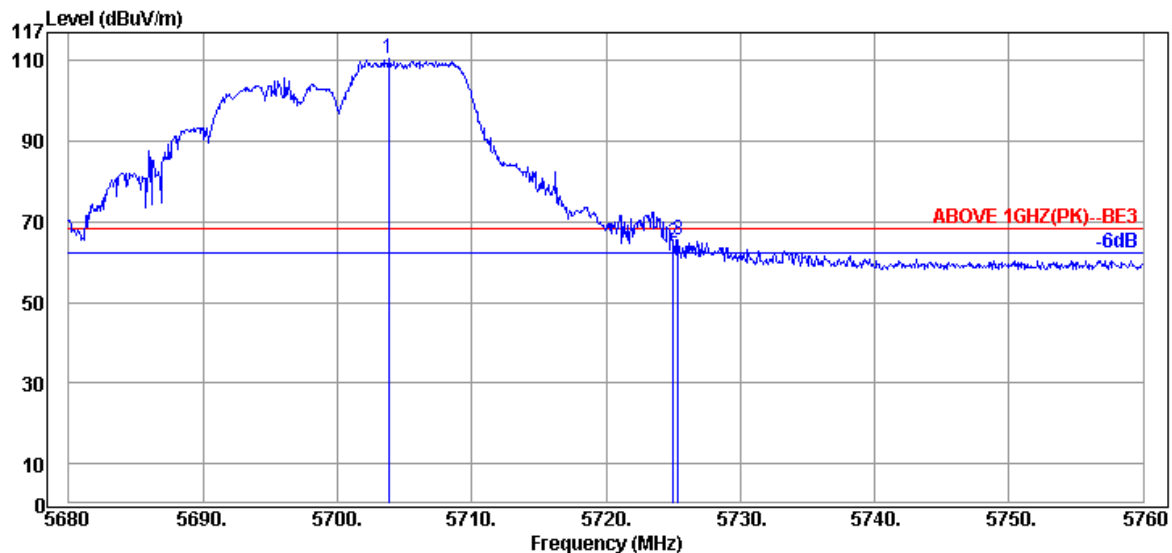

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.84	34.87	10.90	64.85	110.62	---	---	Peak
5725.04	34.83	10.91	18.92	64.66	68.20	3.54	Peak
5725.36	34.83	10.91	19.70	65.44	68.20	2.76	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

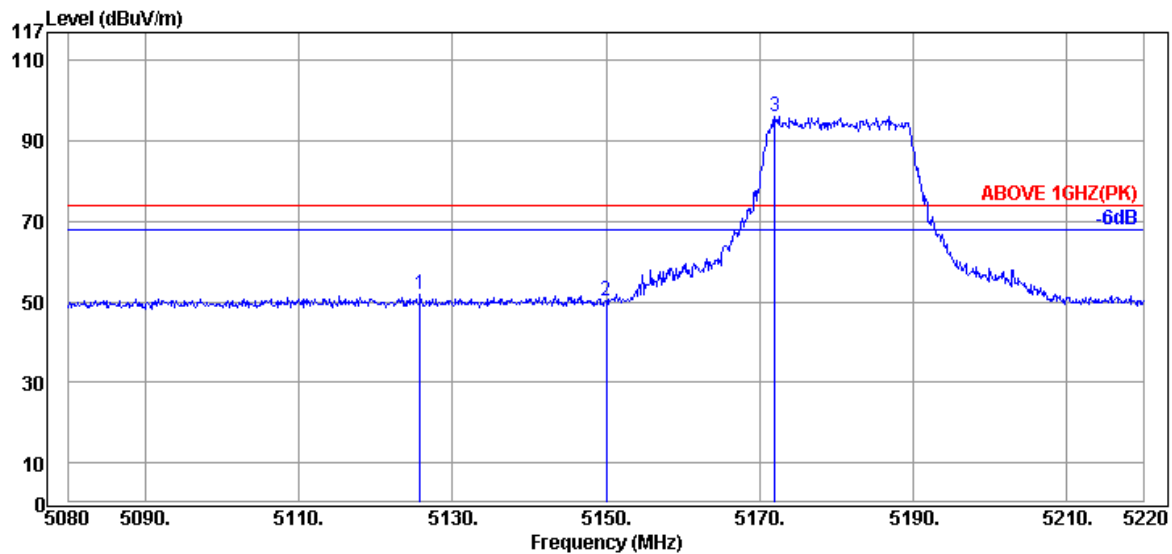

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5125.78	34.63	10.59	6.54	51.76	74.00	22.24	Peak
5150.00	34.70	10.61	4.82	50.13	74.00	23.87	Peak
@ 5171.98	34.63	10.62	50.79	96.04	---	---	Peak

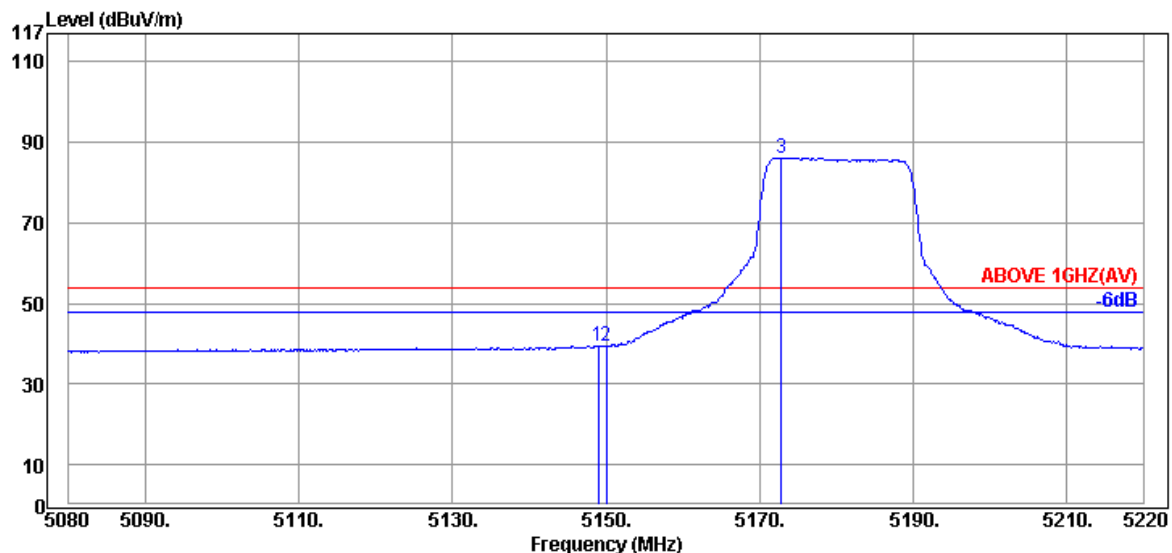

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.02	34.70	10.61	-5.83	39.48	54.00	14.52	Average
5150.00	34.70	10.61	-5.84	39.47	54.00	14.53	Average
@ 5172.82	34.63	10.62	40.96	86.21	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

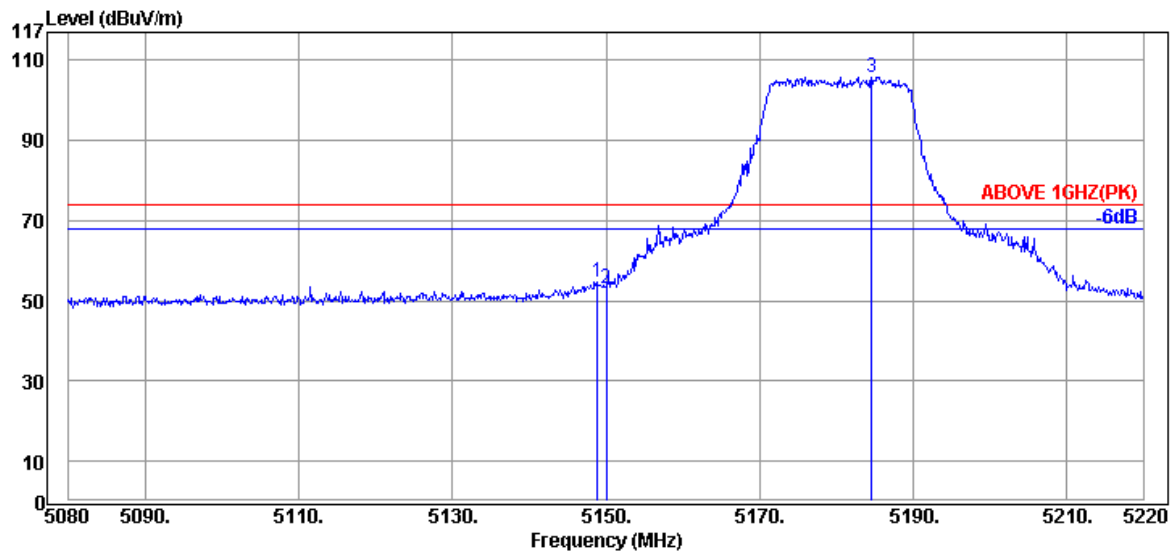

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.88	34.70	10.61	9.44	54.75	74.00	19.25	Peak
5150.00	34.70	10.61	7.89	53.20	74.00	20.80	Peak
@ 5184.58	34.57	10.63	60.74	105.94	---	---	Peak

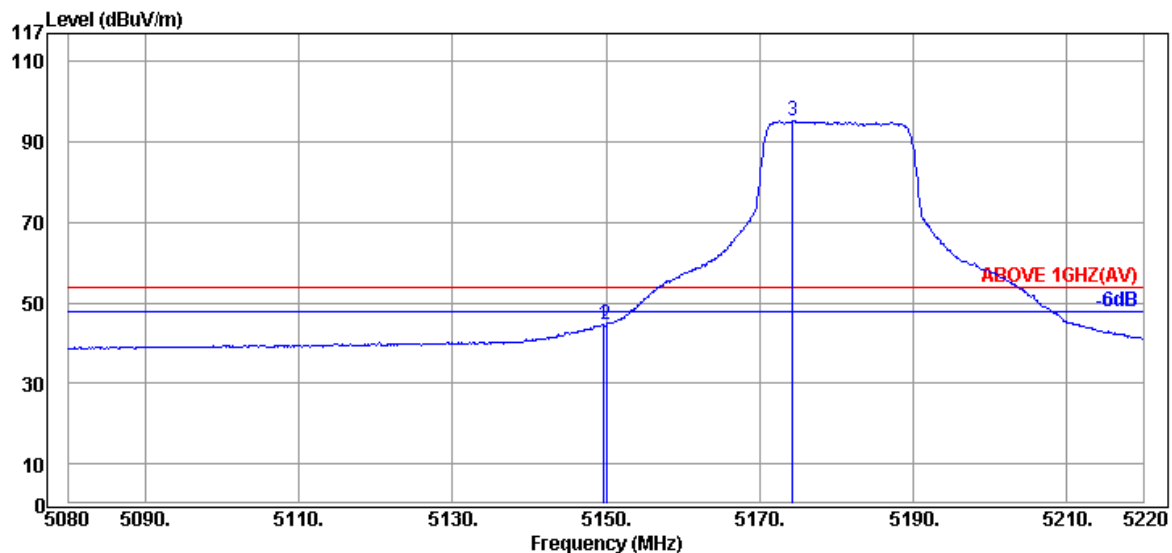

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.72	34.70	10.61	-0.80	44.51	54.00	9.49	Average
5150.00	34.70	10.61	-0.49	44.82	54.00	9.18	Average
@ 5174.36	34.57	10.63	50.23	95.43	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
RU Configuration	242/62	Frequency	TX 5310MHz

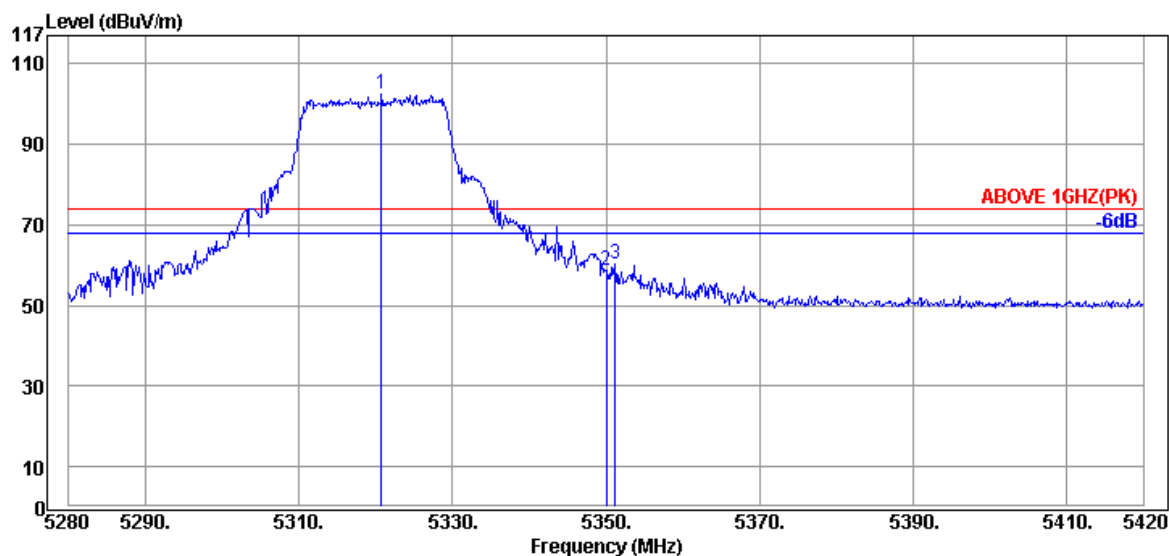

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.74	34.67	10.74	56.96	102.37	---	---	Peak
5350.00	34.80	10.76	13.01	58.57	74.00	15.43	Peak
5351.26	34.80	10.76	14.82	60.38	74.00	13.62	Peak

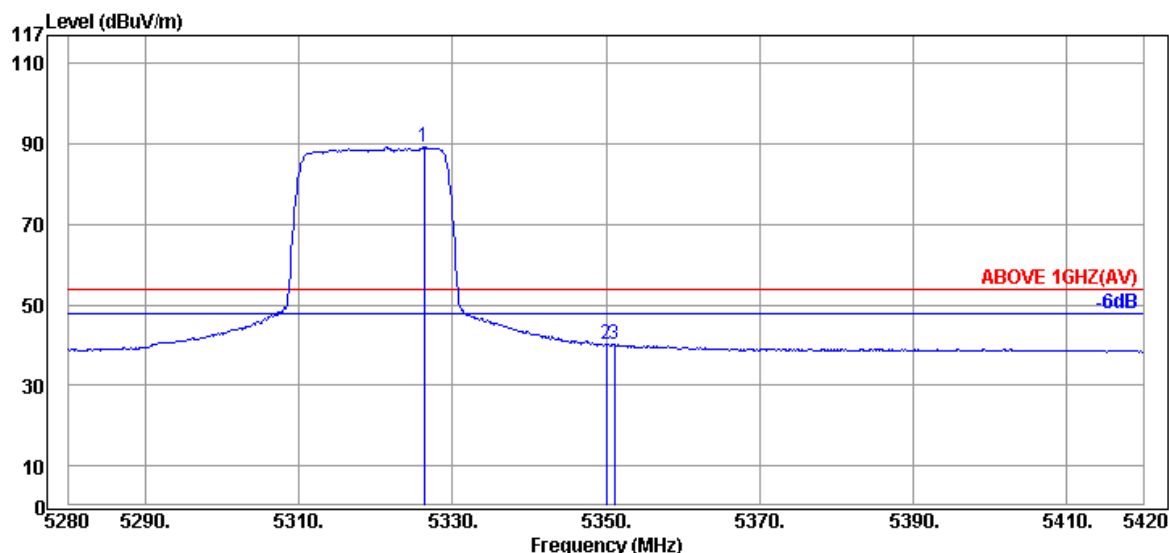

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.34	34.67	10.74	43.81	89.22	---	---	Average
5350.00	34.80	10.76	-5.45	40.11	54.00	13.89	Average
5351.12	34.80	10.76	-5.27	40.29	54.00	13.71	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185

Report Number: EM-F190365


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
RU Configuration	242/62	Frequency	TX 5310MHz

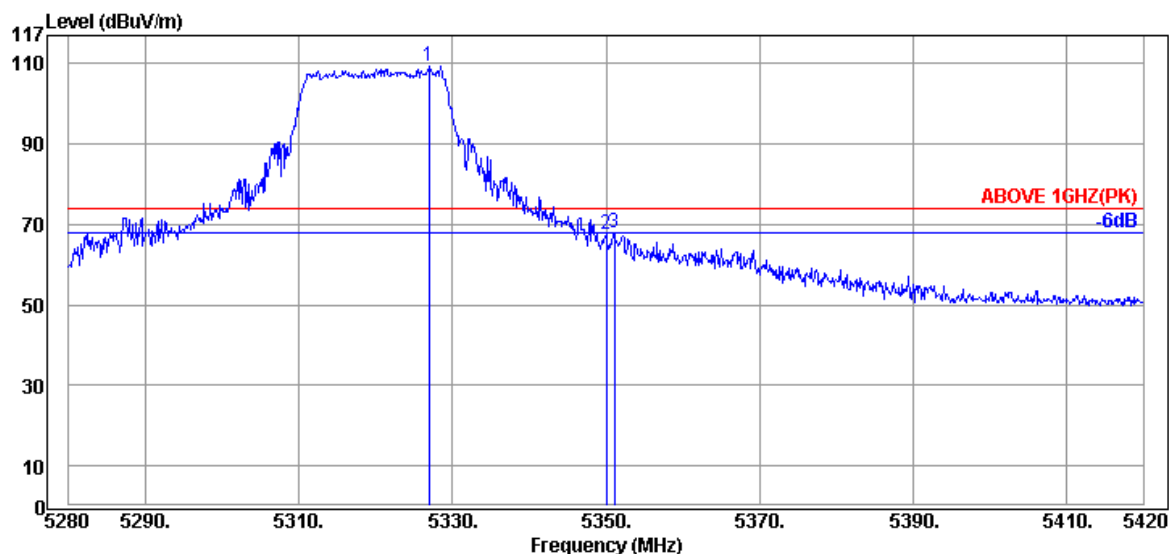

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.90	34.73	10.75	63.85	109.33	---	---	Peak
	5350.00	34.80	10.76	22.17	67.73	74.00	6.27	Peak
	5351.12	34.80	10.76	22.38	67.94	74.00	6.06	Peak

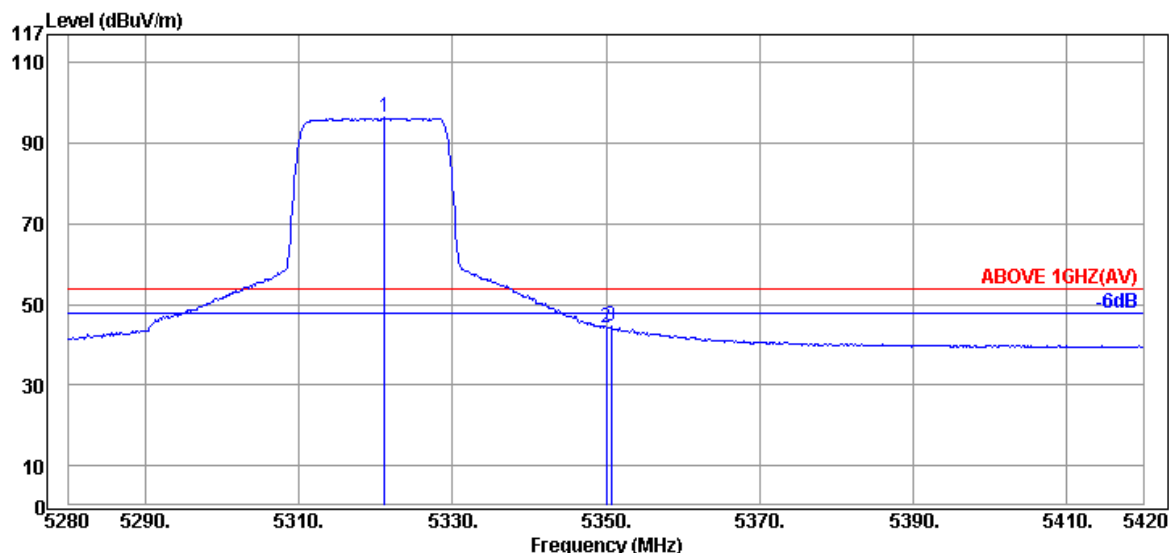

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5321.16	34.67	10.74	51.08	96.49	---	---	Average
	5350.00	34.80	10.76	-1.34	44.22	54.00	9.78	Average
	5350.70	34.80	10.76	-1.01	44.55	54.00	9.45	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
RU Configuration	242/61	Frequency	TX 5510MHz

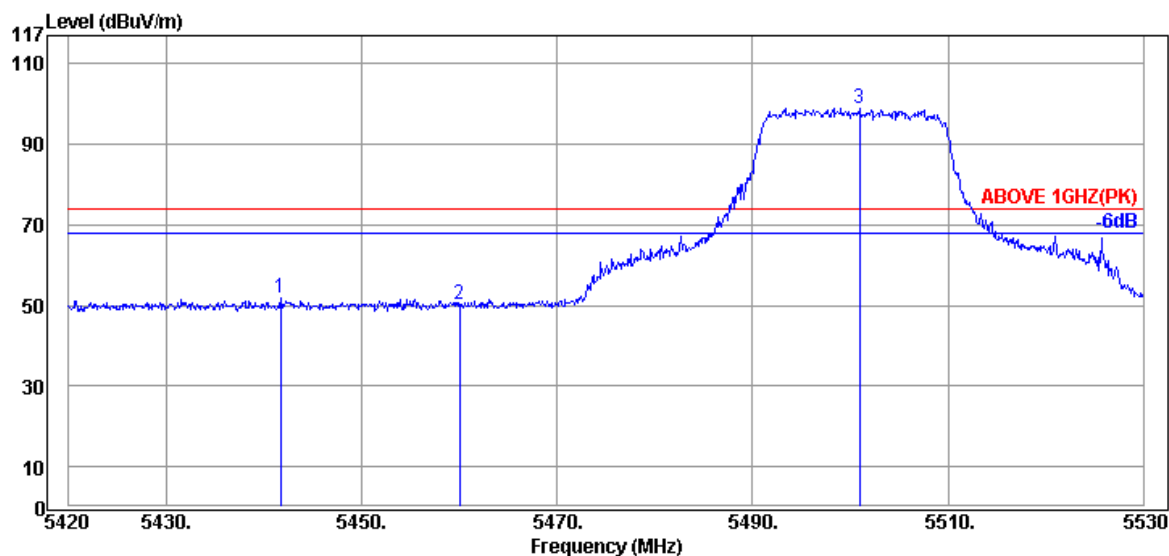

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.67	34.77	10.83	6.07	51.67	74.00	22.33	Peak
5460.04	34.70	10.84	4.83	50.37	74.00	23.63	Peak
@ 5500.96	34.60	10.88	53.40	98.88	---	---	Peak

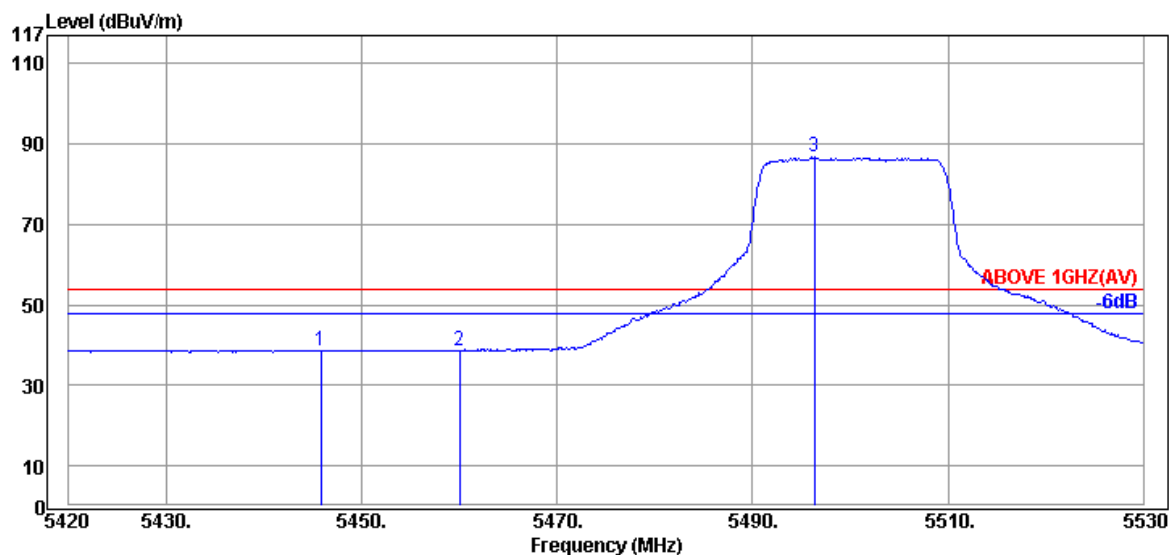

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.85	34.70	10.84	-6.75	38.79	54.00	15.21	Average
5460.04	34.70	10.84	-6.82	38.72	54.00	15.28	Average
@ 5496.34	34.63	10.87	41.32	86.82	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
RU Configuration	242/61	Frequency	TX 5510MHz

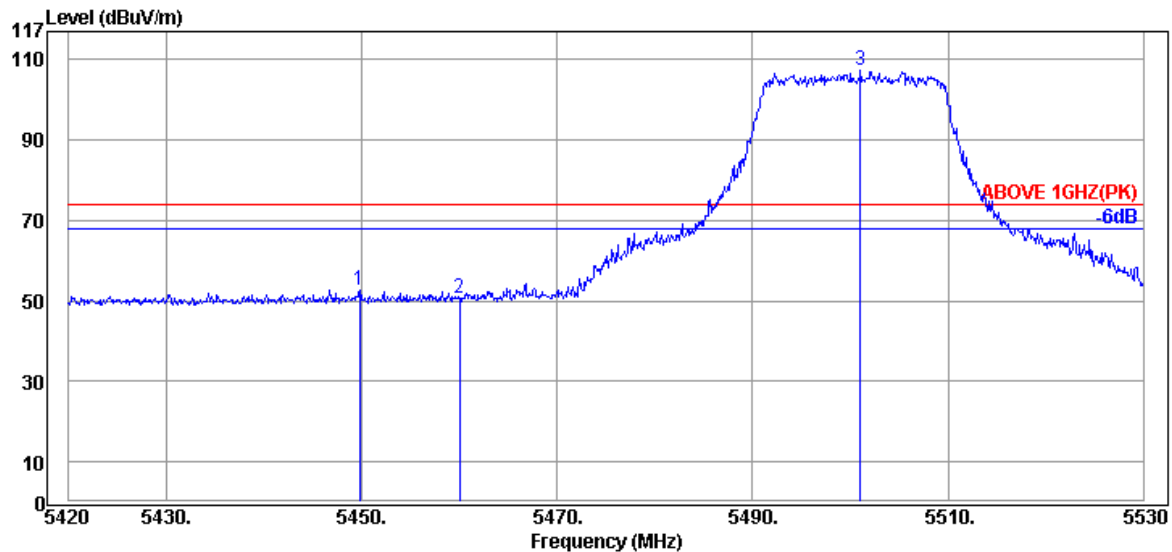

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.81	34.70	10.84	7.03	52.57	74.00	21.43	Peak
5460.04	34.70	10.84	5.02	50.56	74.00	23.44	Peak
@ 5501.07	34.60	10.88	61.99	107.47	---	---	Peak

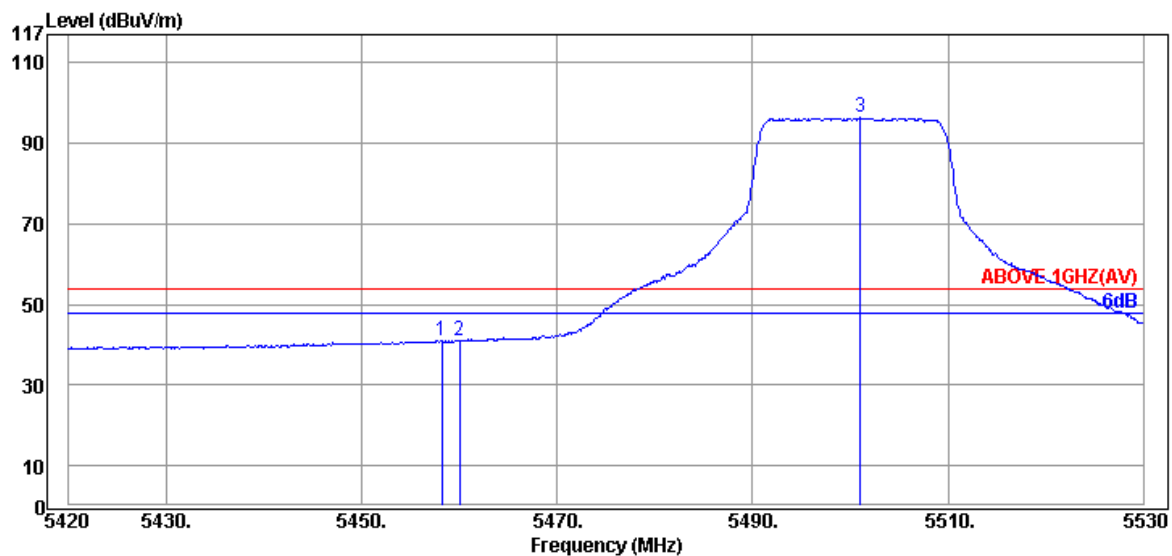

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.17	34.70	10.84	-4.51	41.03	54.00	12.97	Average
5460.04	34.70	10.84	-4.68	40.86	54.00	13.14	Average
@ 5501.07	34.60	10.88	50.85	96.33	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
RU Configuration	242/61	Frequency	TX 5510MHz

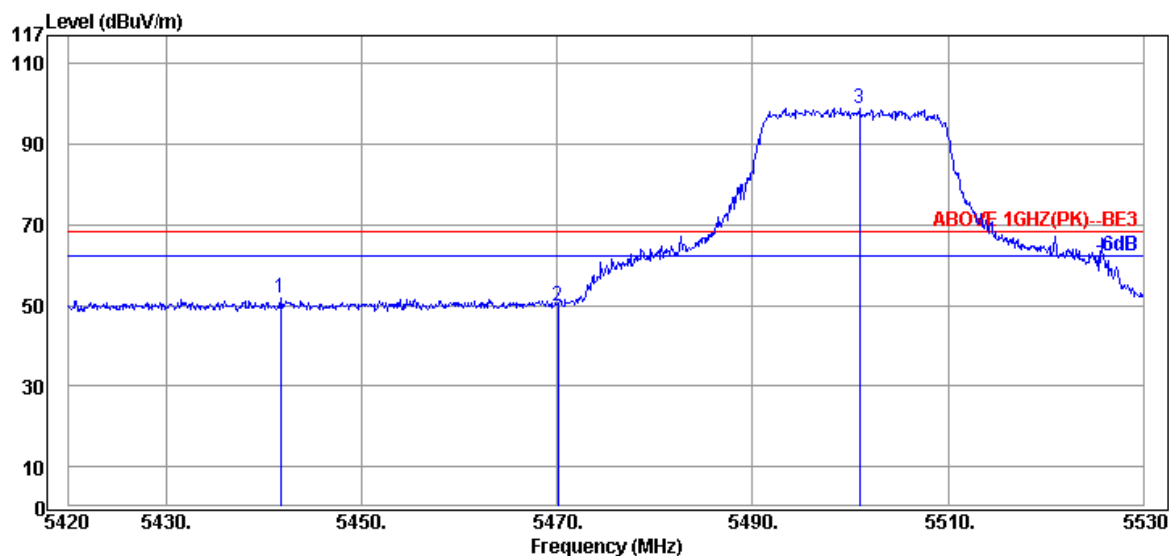

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.67	34.77	10.83	6.07	51.67	68.20	16.53	Peak
5470.05	34.67	10.85	4.48	50.00	68.20	18.20	Peak
@ 5500.96	34.60	10.88	53.40	98.88	---	---	Peak

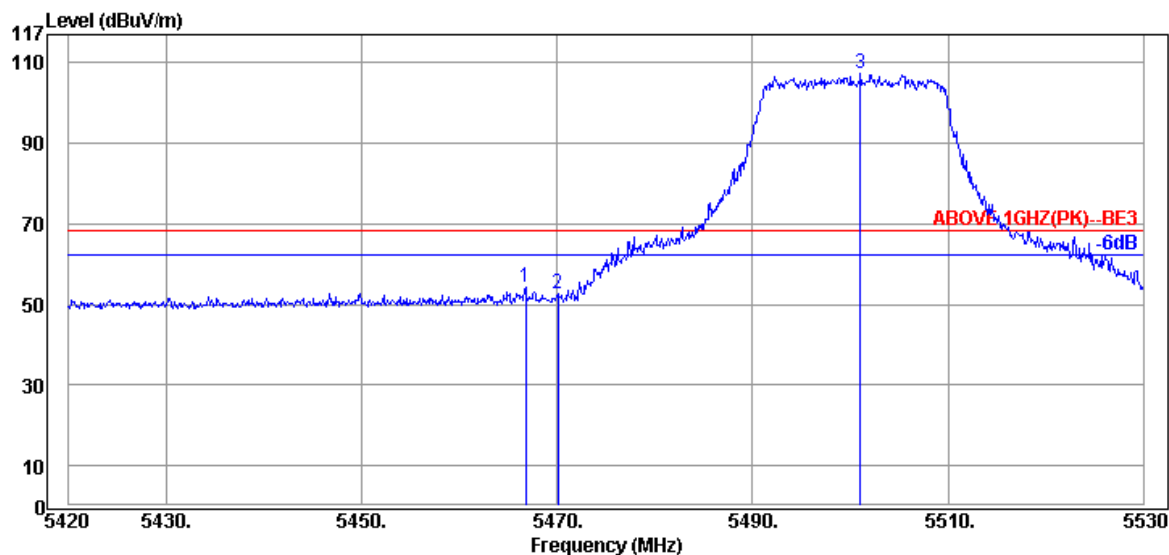

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.75	34.67	10.85	8.64	54.16	68.20	14.04	Peak
5470.05	34.67	10.85	7.23	52.75	68.20	15.45	Peak
@ 5501.07	34.60	10.88	61.99	107.47	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
RU Configuration	242/62	Frequency	TX 5670MHz

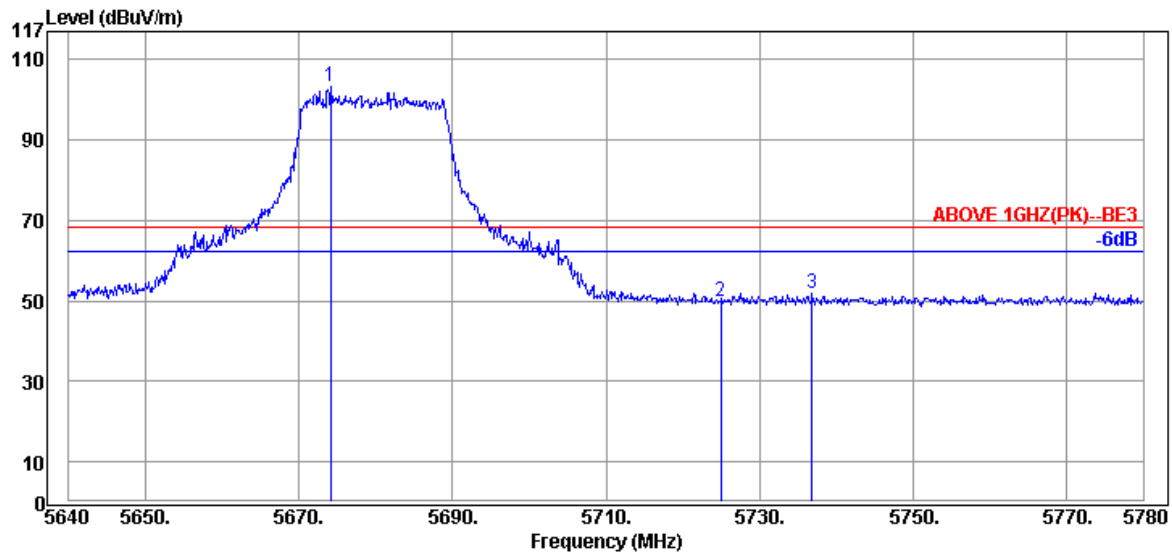

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5674.16	34.85	10.90	57.56	103.31	---	---	Peak
	5724.98	34.83	10.91	3.96	49.70	68.20	18.50	Peak
	5736.88	34.80	10.91	6.20	51.91	68.20	16.29	Peak

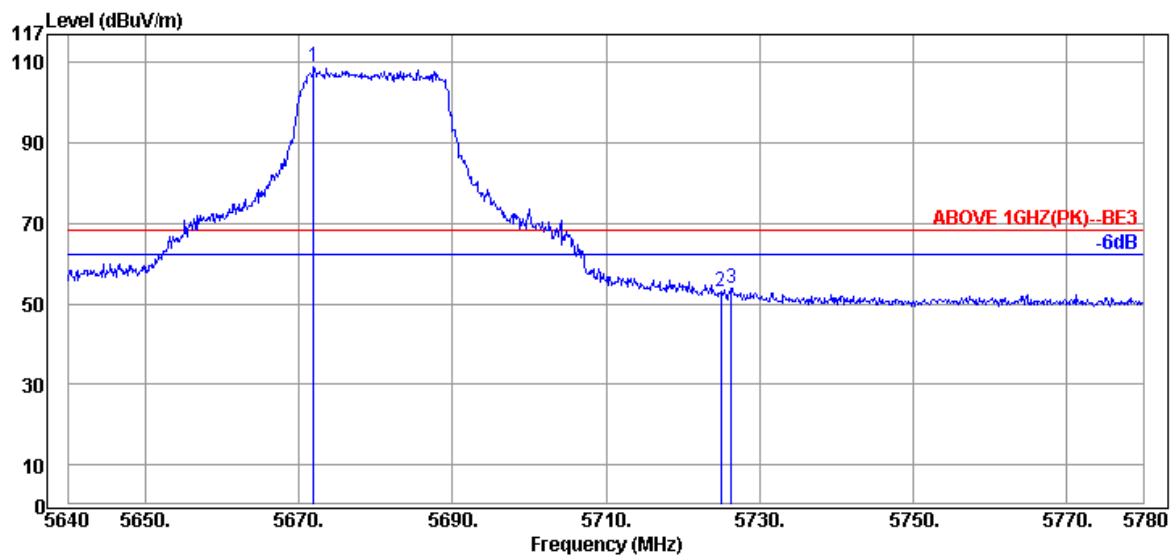

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5671.92	34.85	10.90	63.12	108.87	---	---	Peak
	5724.98	34.83	10.91	7.35	53.09	68.20	15.11	Peak
	5726.38	34.83	10.91	8.26	54.00	68.20	14.20	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

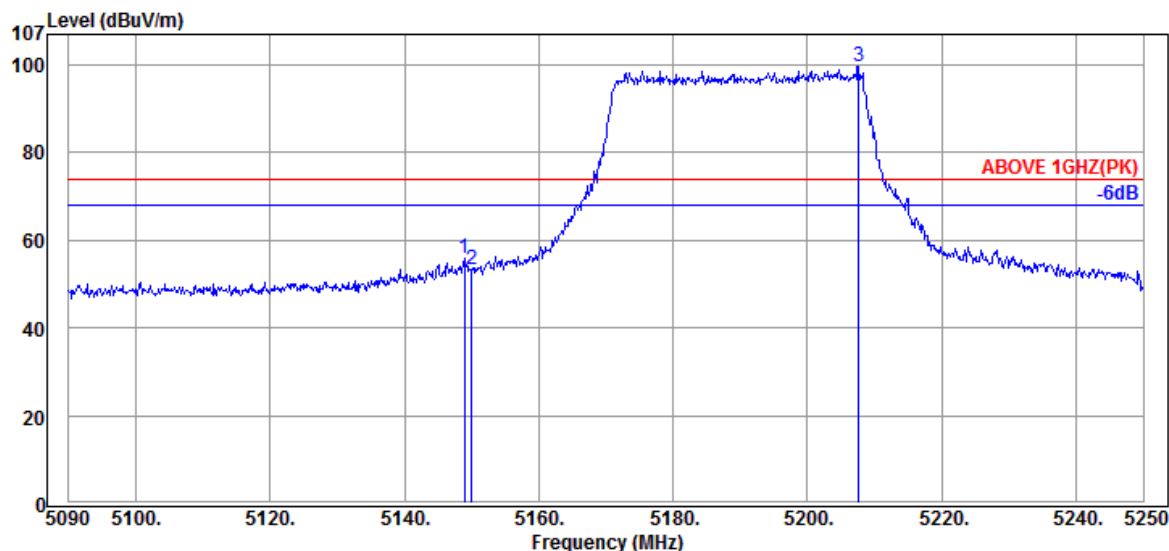

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.88	34.70	10.61	10.44	55.75	74.00	18.25	Peak
5150.00	34.70	10.61	7.83	53.14	74.00	20.86	Peak
@ 5207.60	34.50	10.66	54.43	99.59	---	---	Peak

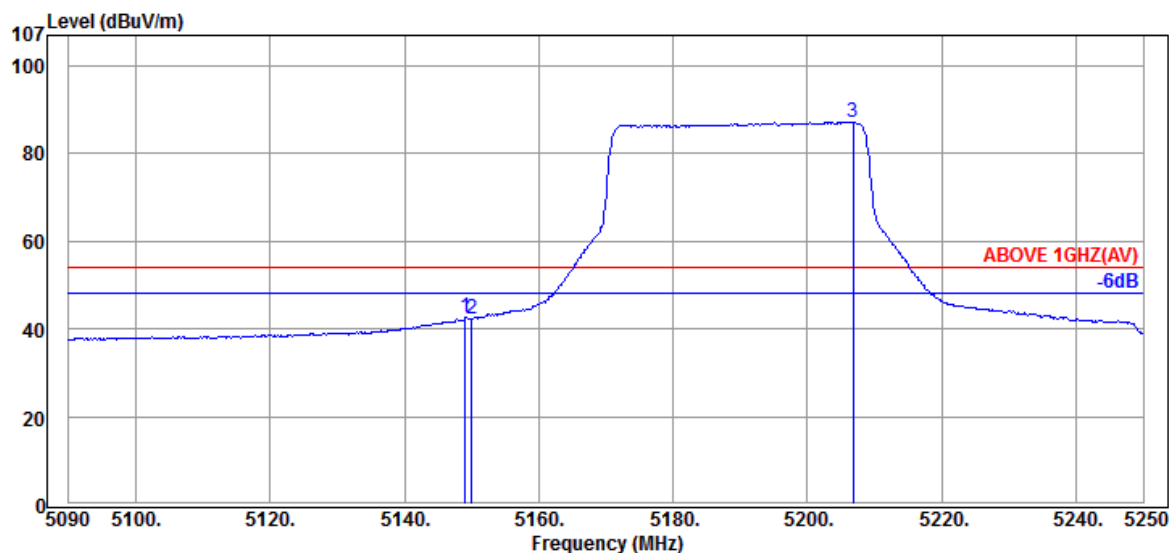

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.04	34.70	10.61	-2.67	42.64	54.00	11.36	Average
5150.00	34.70	10.61	-3.00	42.31	54.00	11.69	Average
@ 5206.80	34.50	10.65	42.05	87.20	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

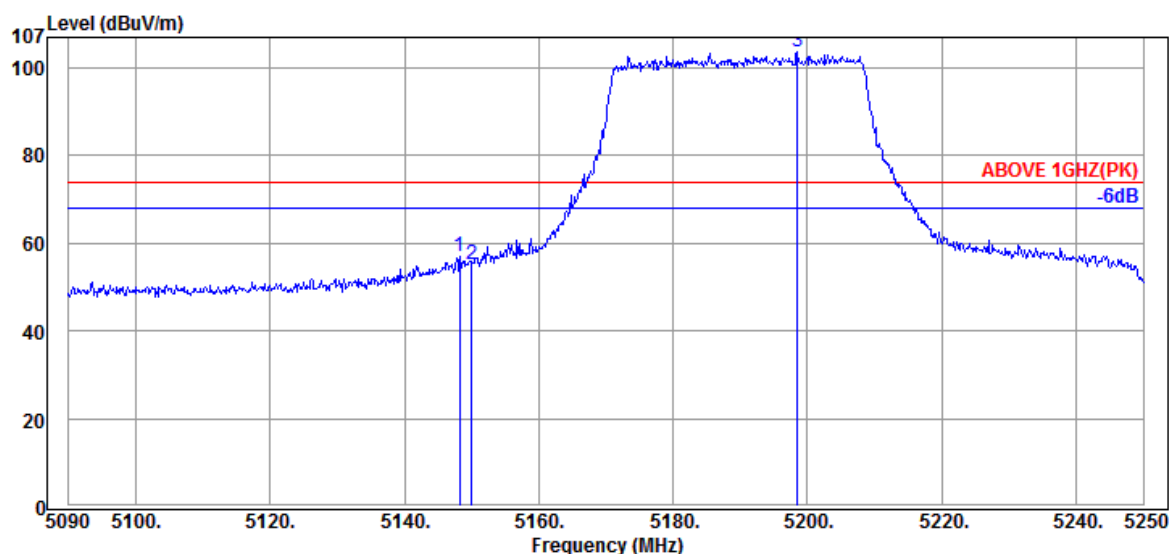

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.24	34.70	10.61	11.78	57.09	74.00	16.91	Peak
5150.00	34.70	10.61	9.68	54.99	74.00	19.01	Peak
@ 5198.48	34.50	10.65	58.60	103.75	---	---	Peak

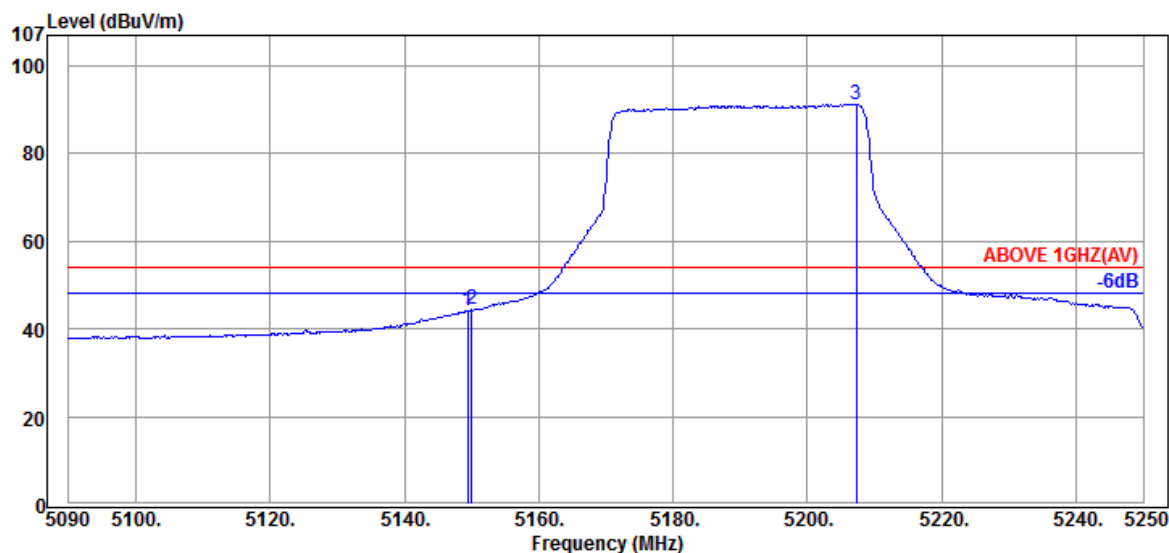

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.36	34.70	10.61	-1.04	44.27	54.00	9.73	Average
5150.00	34.70	10.61	-0.79	44.52	54.00	9.48	Average
@ 5207.28	34.50	10.65	46.13	91.28	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
RU Configuration	484/66	Frequency	TX 5290MHz

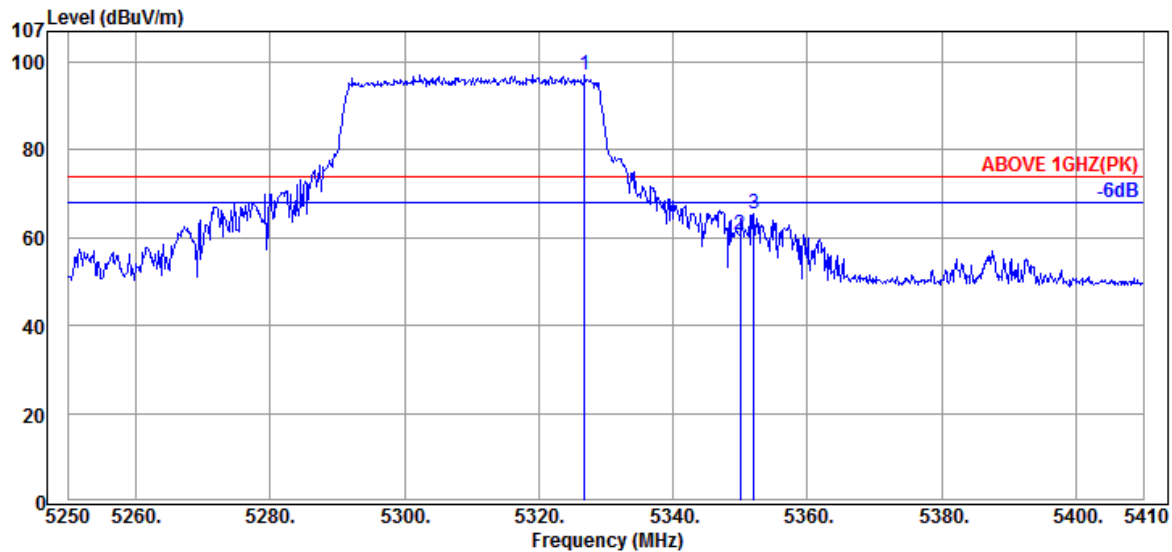

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.80	34.73	10.75	51.67	97.15	---	---	Peak
5350.00	34.80	10.76	15.28	60.84	74.00	13.16	Peak
5352.08	34.80	10.76	19.92	65.48	74.00	8.52	Peak

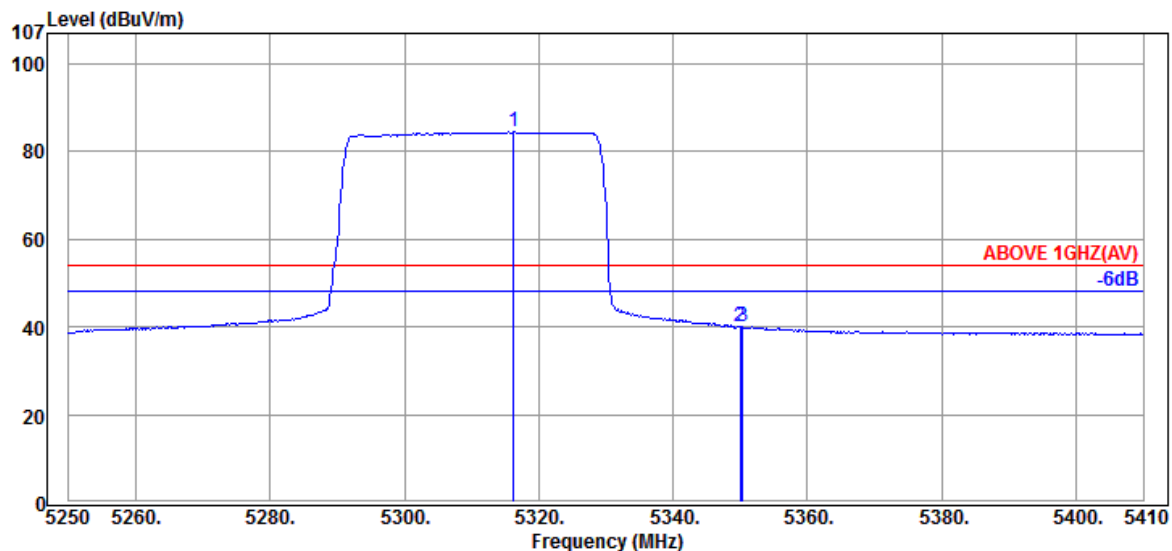

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.24	34.67	10.74	39.09	84.50	---	---	Average
5350.00	34.80	10.76	-5.57	39.99	54.00	14.01	Average
5350.32	34.80	10.76	-5.61	39.95	54.00	14.05	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM1909185

Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
RU Configuration	484/66	Frequency	TX 5290MHz

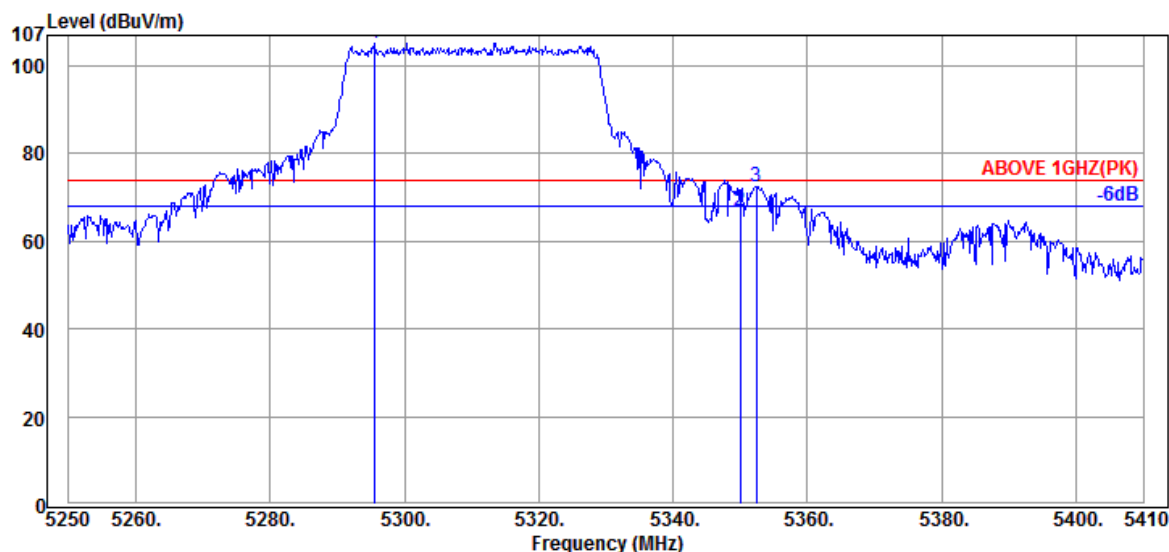

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5295.60	34.60	10.72	59.85	105.17	---	---	Peak
	5350.00	34.80	10.76	21.22	66.78	74.00	7.22	Peak
	5352.40	34.80	10.76	26.88	72.44	74.00	1.56	Peak

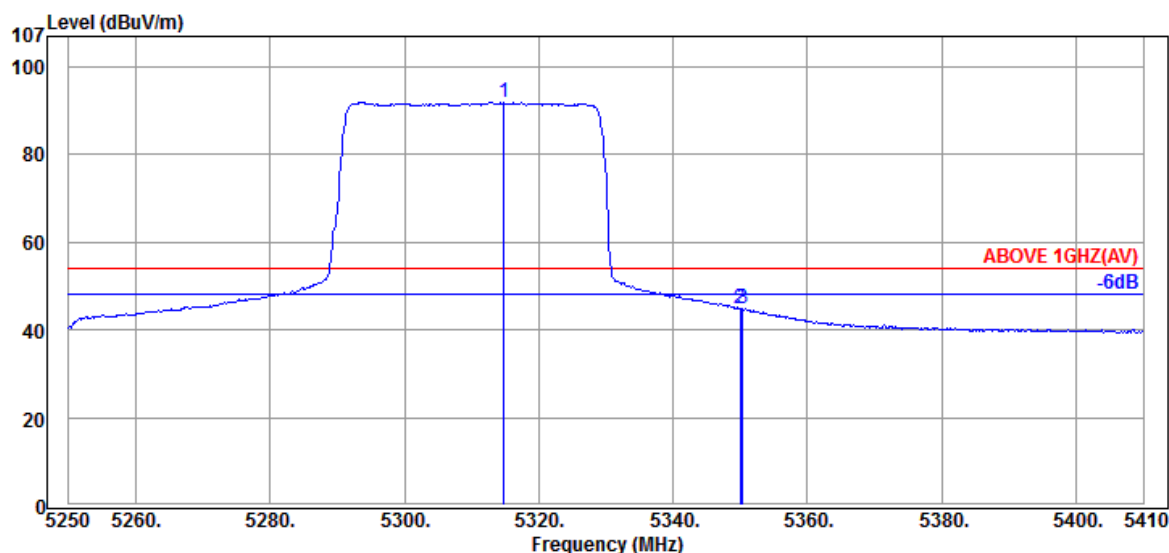

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.80	34.67	10.74	46.40	91.81	---	---	Average
	5350.00	34.80	10.76	-0.71	44.85	54.00	9.15	Average
	5350.32	34.80	10.76	-0.77	44.79	54.00	9.21	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
RU Configuration	484/65	Frequency	TX 5530MHz

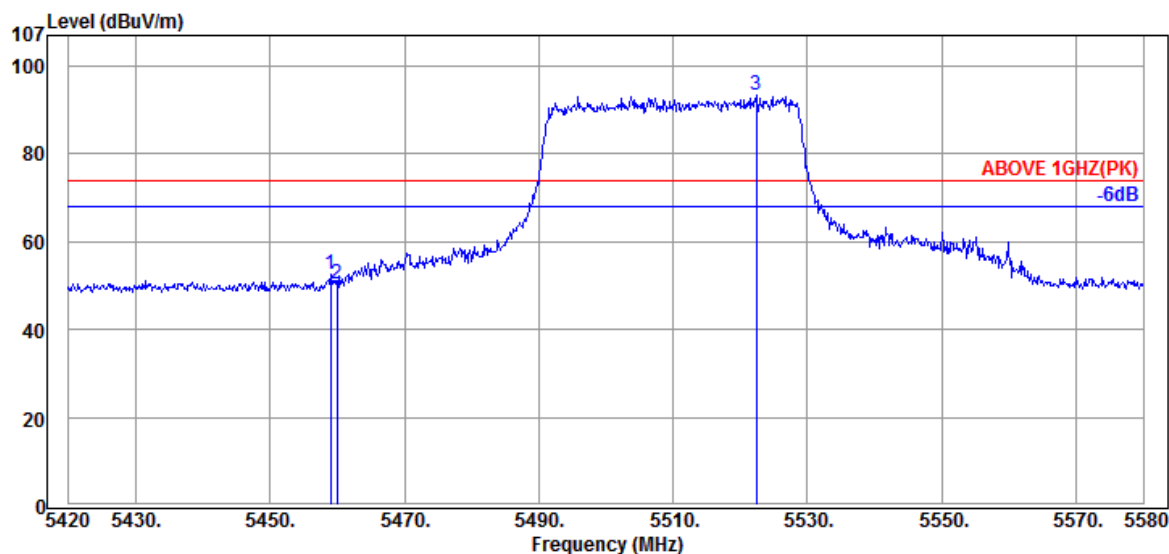

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.04	34.70	10.84	7.03	52.57	74.00	21.43	Peak
5460.00	34.70	10.84	4.80	50.34	74.00	23.66	Peak
@ 5522.40	34.63	10.88	47.77	93.28	---	---	Peak

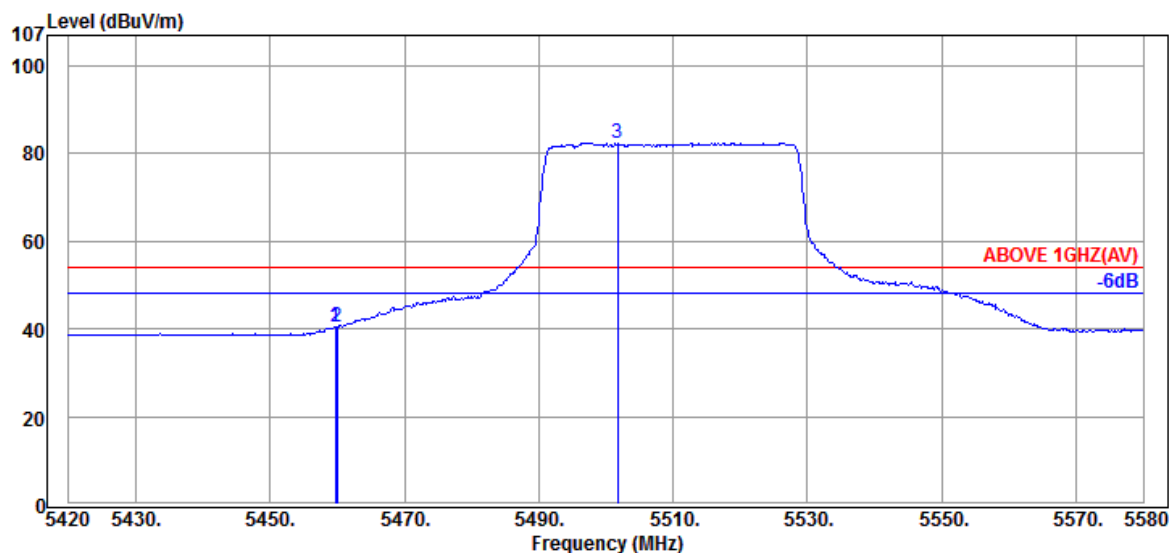

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.68	34.70	10.84	-4.92	40.62	54.00	13.38	Average
5460.00	34.70	10.84	-4.93	40.61	54.00	13.39	Average
@ 5501.76	34.60	10.88	36.97	82.45	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
RU Configuration	484/65	Frequency	TX 5530MHz

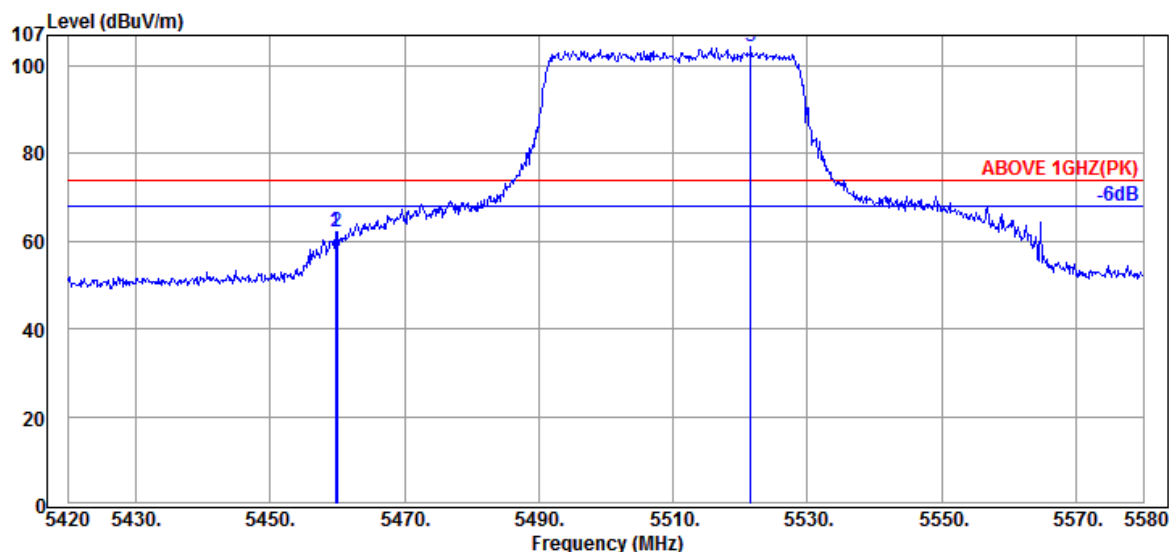

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.68	34.70	10.84	16.72	62.26	74.00	11.74	Peak
5460.00	34.70	10.84	16.48	62.02	74.00	11.98	Peak
@ 5521.60	34.63	10.88	58.97	104.48	---	---	Peak

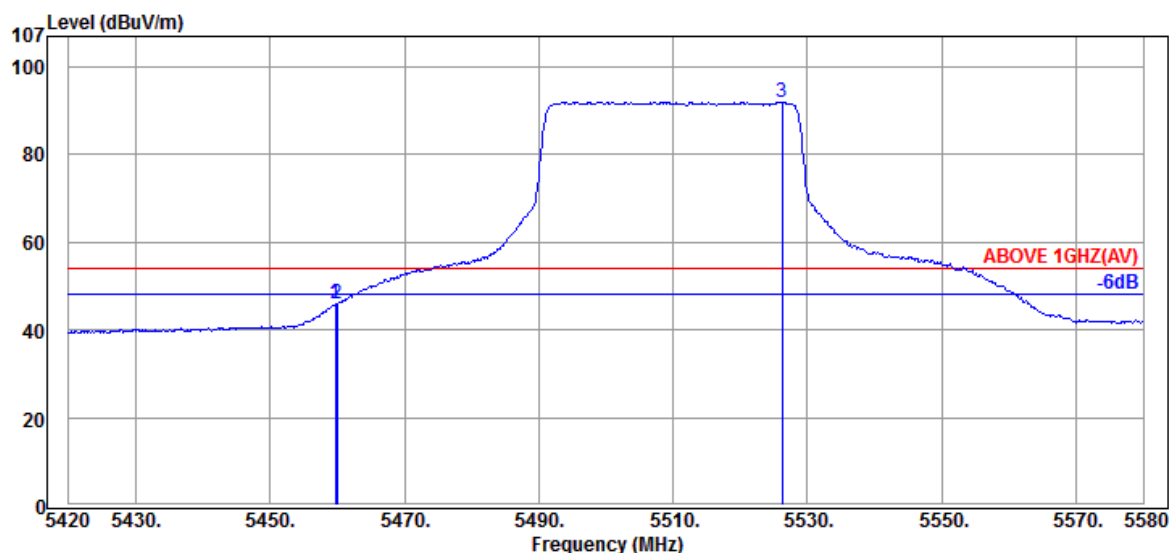

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.68	34.70	10.84	0.31	45.85	54.00	8.15	Average
5460.00	34.70	10.84	0.53	46.07	54.00	7.93	Average
@ 5526.24	34.63	10.88	46.58	92.09	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
RU Configuration	484/65	Frequency	TX 5530MHz

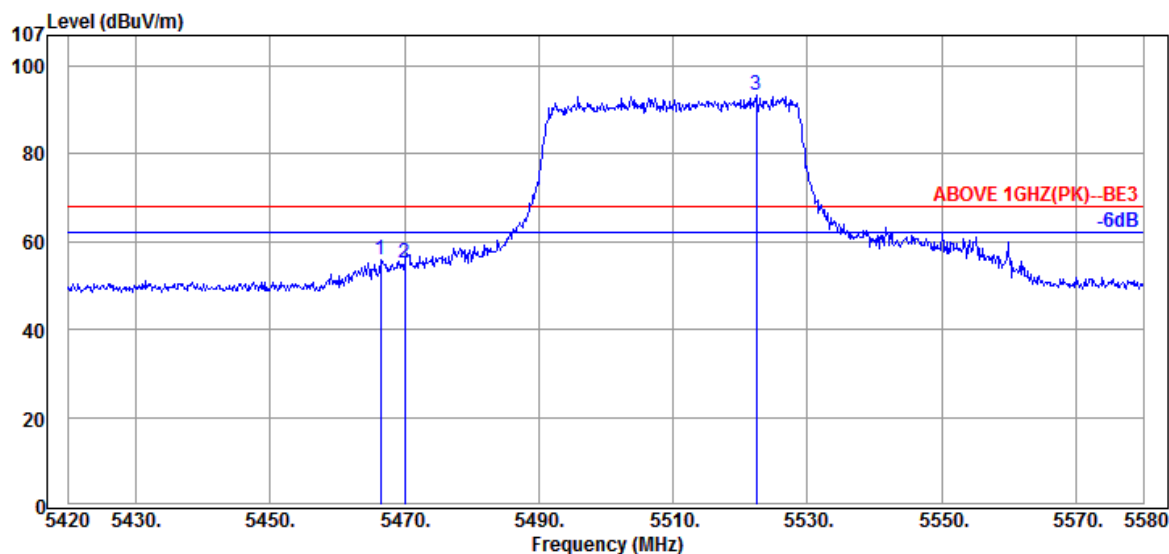

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.40	34.67	10.85	10.36	55.88	68.20	12.32	Peak
5470.08	34.67	10.85	9.49	55.01	68.20	13.19	Peak
@ 5522.40	34.63	10.88	47.77	93.28	---	---	Peak

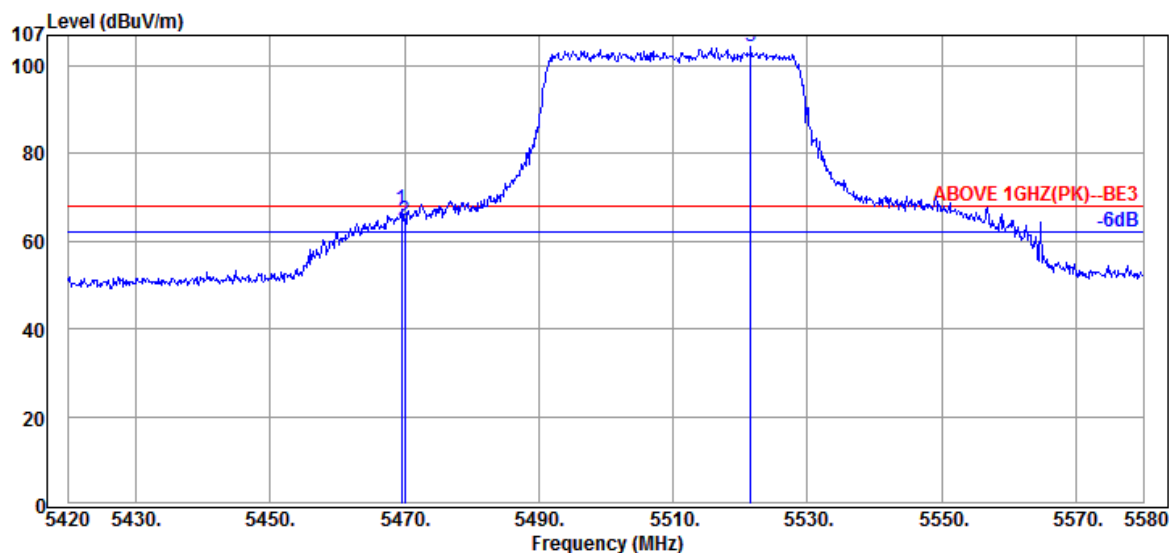

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.60	34.67	10.85	21.88	67.40	68.20	0.80	Peak
5470.08	34.67	10.85	19.22	64.74	68.20	3.46	Peak
@ 5521.60	34.63	10.88	58.97	104.48	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/67	Frequency	TX 5250MHz

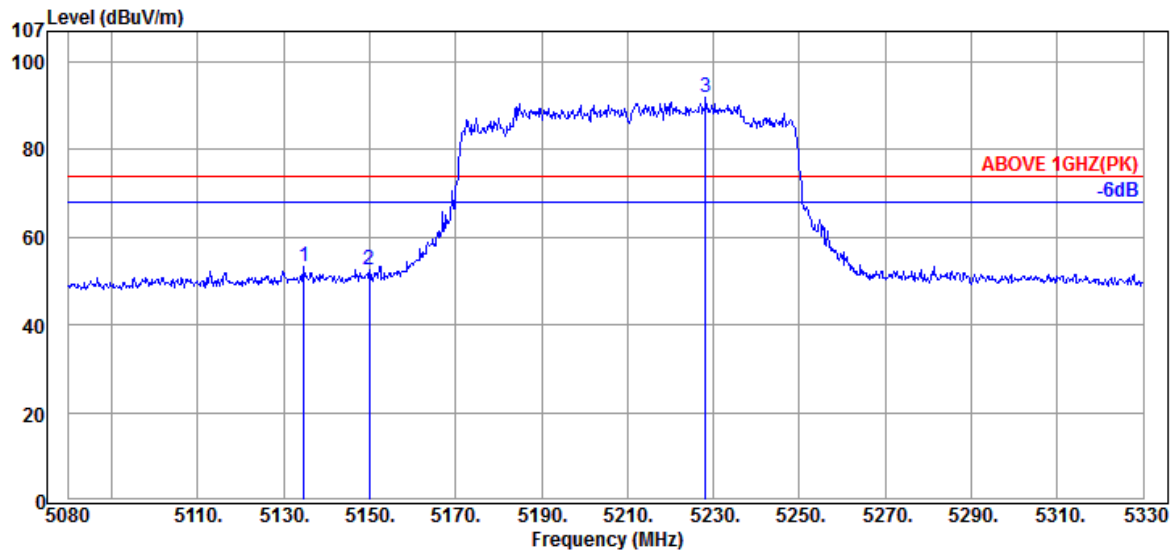

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.75	34.63	10.59	8.23	53.45	74.00	20.55	Peak
5150.00	34.70	10.61	7.26	52.57	74.00	21.43	Peak
@ 5228.25	34.50	10.67	46.81	91.98	---	---	Peak

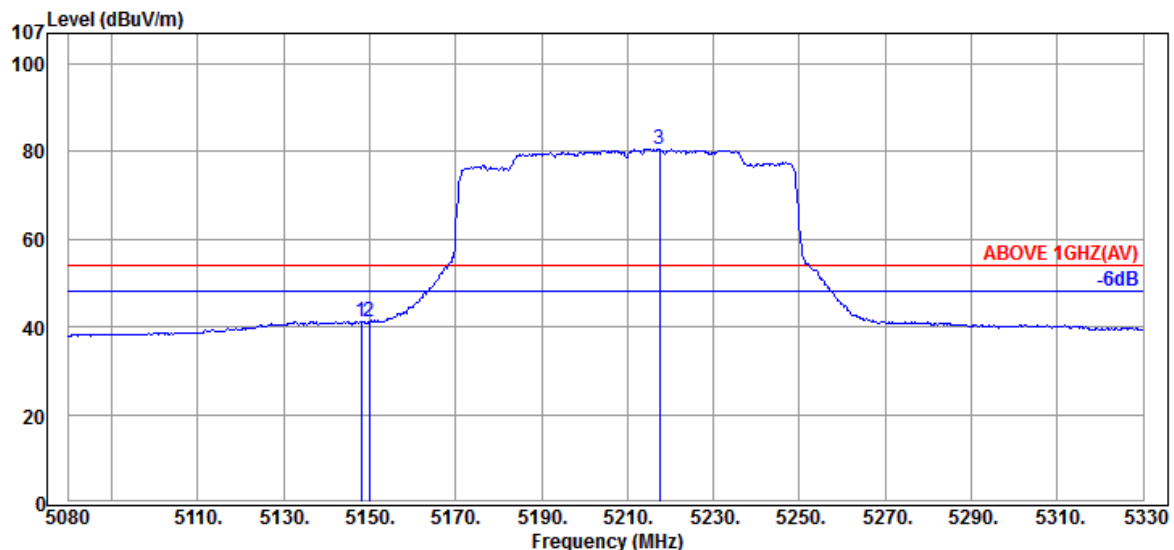

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.00	34.70	10.61	-4.03	41.28	54.00	12.72	Average
5150.00	34.70	10.61	-4.24	41.07	54.00	12.93	Average
@ 5217.50	34.50	10.66	35.54	80.70	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/67	Frequency	TX 5250MHz

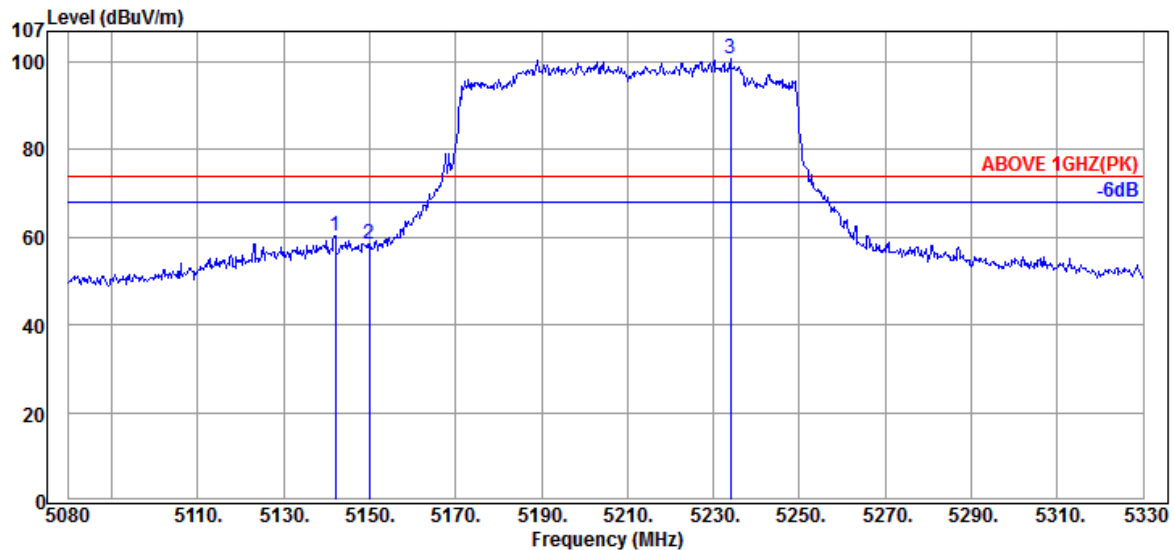

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.00	34.70	10.61	14.88	60.19	74.00	13.81	Peak
5150.00	34.70	10.61	13.06	58.37	74.00	15.63	Peak
@ 5234.00	34.50	10.67	55.41	100.58	---	---	Peak

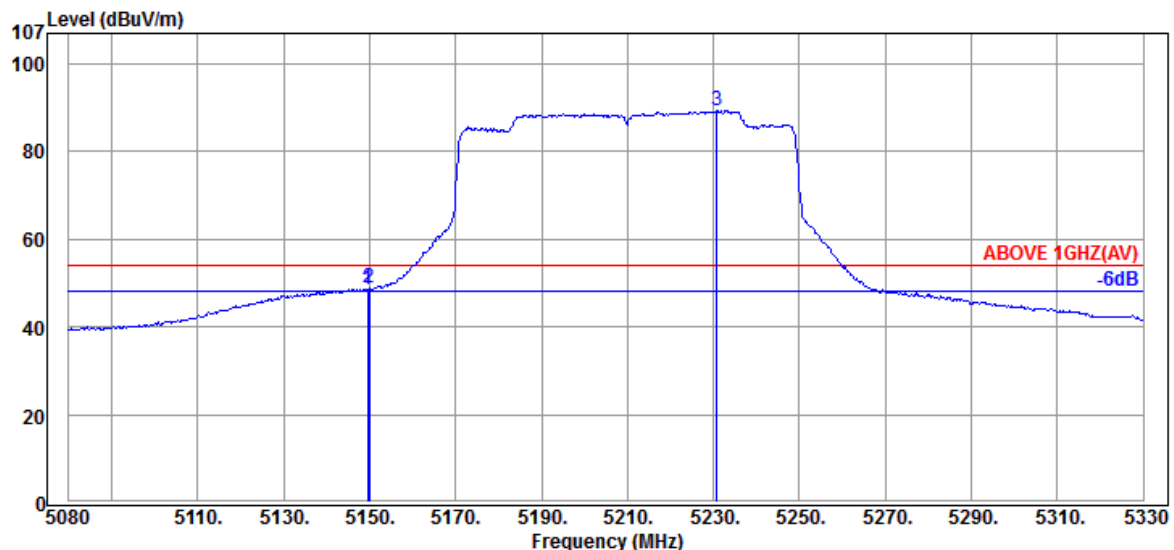

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	34.70	10.61	3.26	48.57	54.00	5.43	Average
5150.00	34.70	10.61	3.44	48.75	54.00	5.25	Average
@ 5230.75	34.50	10.67	44.15	89.32	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

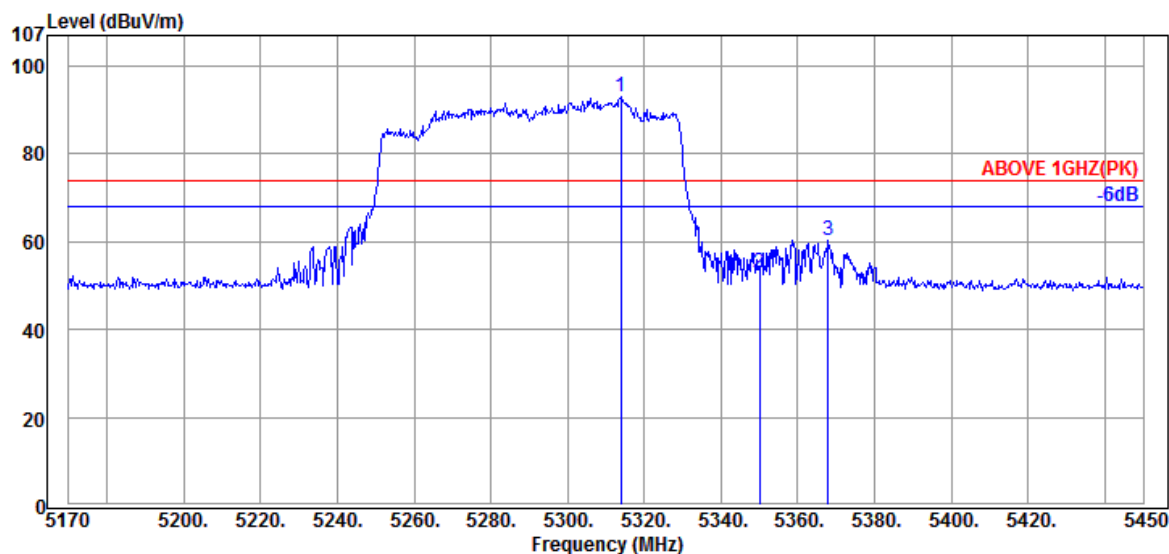

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.92	34.67	10.74	47.72	93.13	---	---	Peak
5350.04	34.80	10.76	7.49	53.05	74.00	20.95	Peak
5367.96	34.83	10.78	14.79	60.40	74.00	13.60	Peak

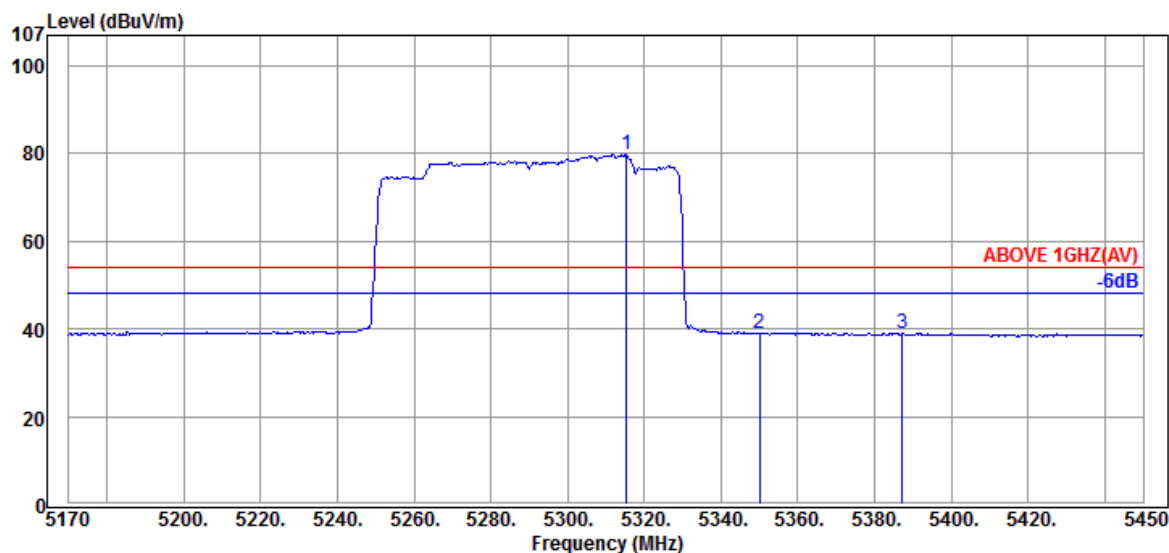

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.32	34.67	10.74	34.29	79.70	---	---	Average
5350.04	34.80	10.76	-6.54	39.02	54.00	14.98	Average
5387.28	34.87	10.79	-6.54	39.12	54.00	14.88	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

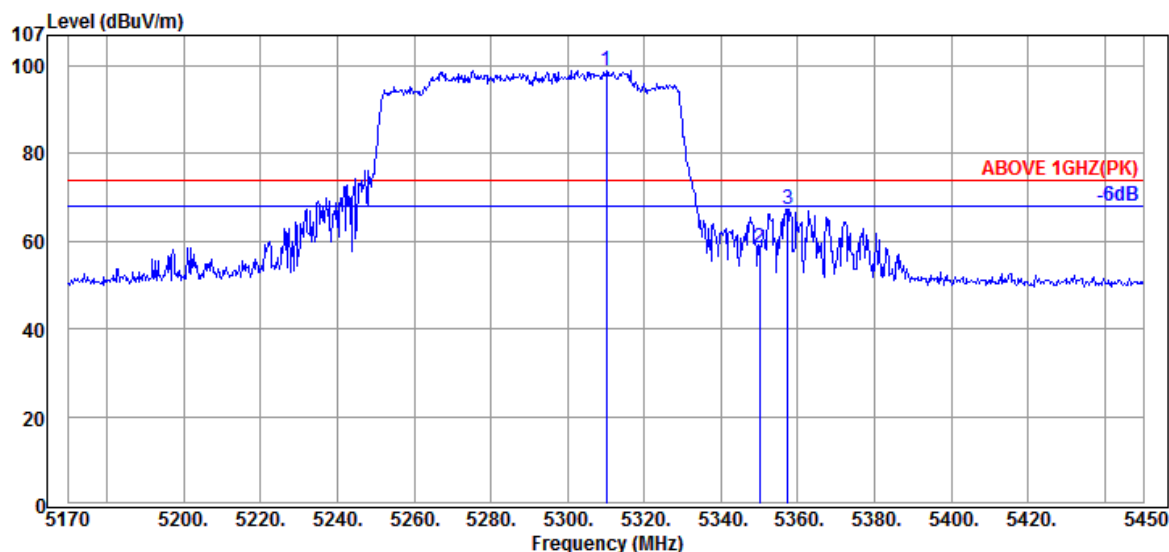

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5310.00	34.67	10.74	53.60	99.01	---	---	Peak
	5350.04	34.80	10.76	12.72	58.28	74.00	15.72	Peak
	5357.32	34.80	10.76	21.77	67.33	74.00	6.67	Peak

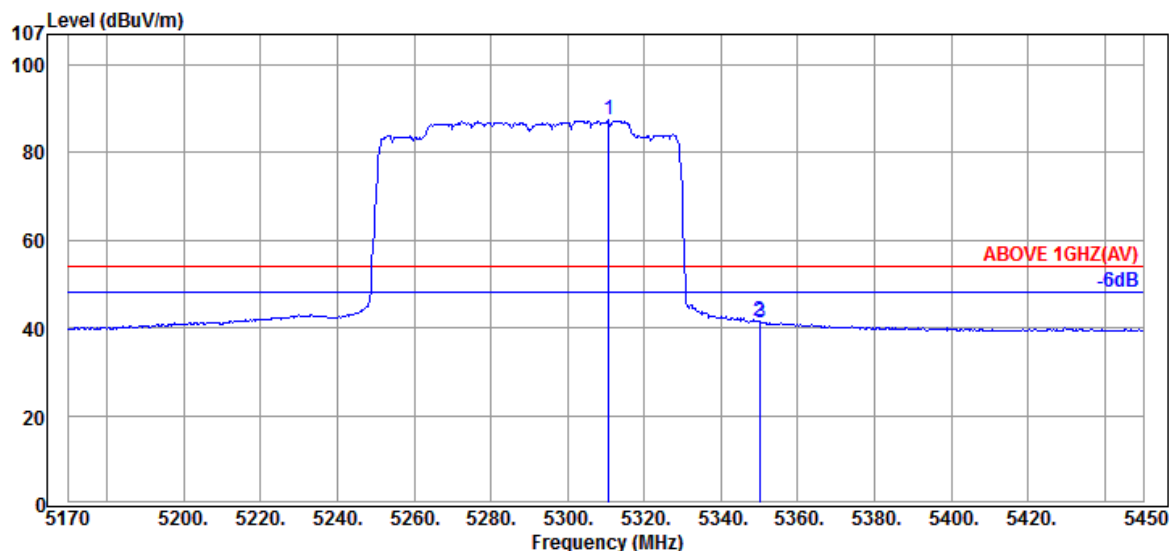

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5310.84	34.67	10.74	41.97	87.38	---	---	Average
	5350.04	34.80	10.76	-4.09	41.47	54.00	12.53	Average
	5350.32	34.80	10.76	-4.27	41.29	54.00	12.71	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
RU Configuration	996/67	Frequency	TX 5570MHz

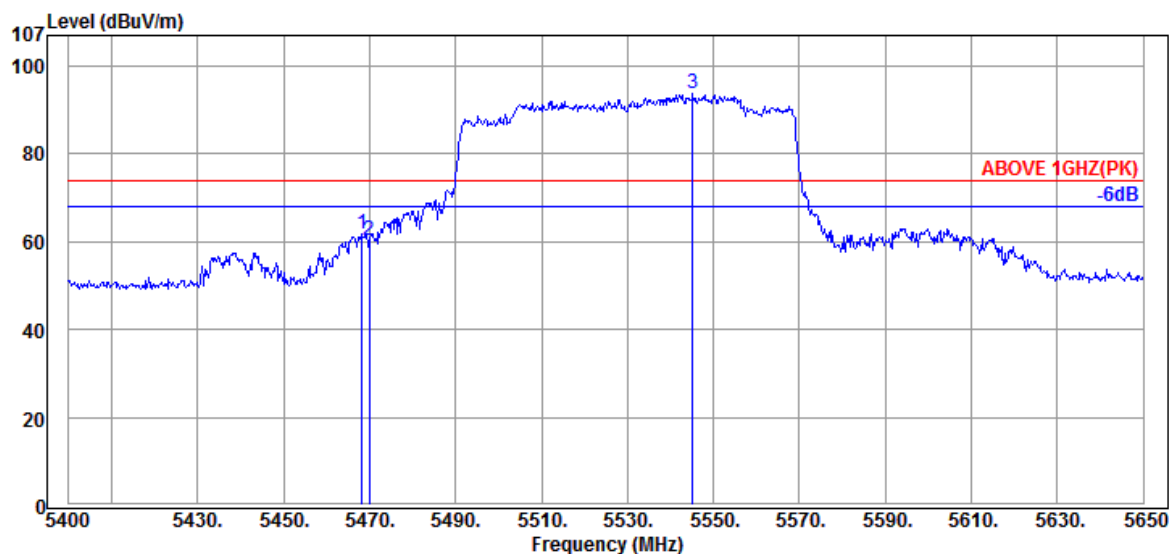

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.25	34.67	10.85	16.40	61.92	74.00	12.08	Peak
5470.00	34.67	10.85	14.66	60.18	74.00	13.82	Peak
@ 5545.25	34.67	10.88	48.06	93.61	---	---	Peak

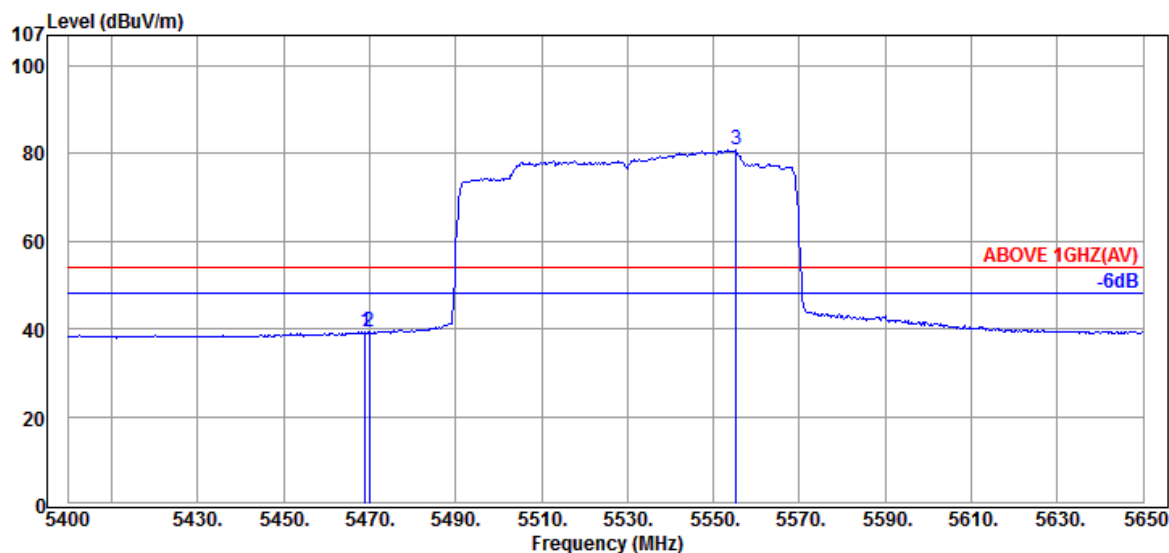

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.00	34.67	10.85	-6.25	39.27	54.00	14.73	Average
5470.00	34.67	10.85	-6.27	39.25	54.00	14.75	Average
@ 5555.25	34.70	10.89	35.26	80.85	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
RU Configuration	996/67	Frequency	TX 5570MHz

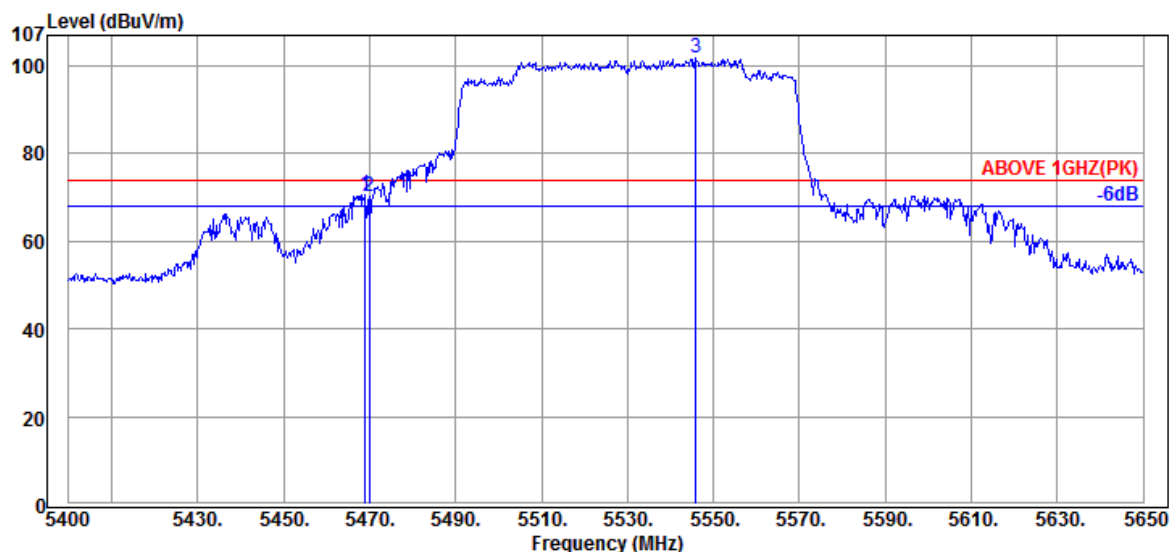

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.00	34.67	10.85	25.09	70.61	74.00	3.39	Peak
5470.00	34.67	10.85	24.75	70.27	74.00	3.73	Peak
@ 5546.00	34.67	10.88	56.39	101.94	---	---	Peak

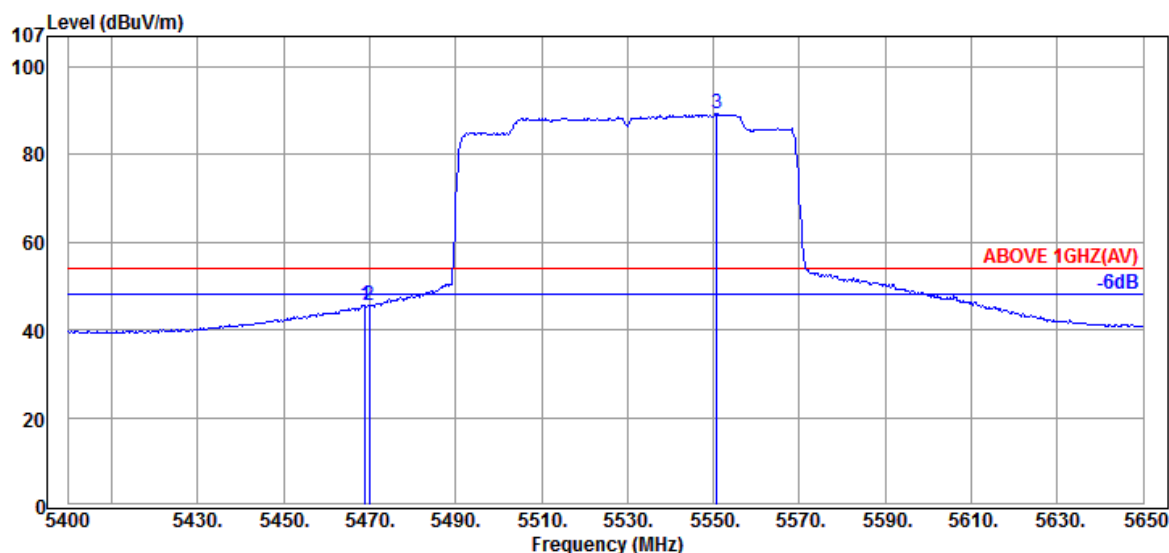

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.00	34.67	10.85	0.02	45.54	54.00	8.46	Average
5470.00	34.67	10.85	0.05	45.57	54.00	8.43	Average
@ 5550.75	34.70	10.89	43.75	89.34	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
RU Configuration	996/S67	Frequency	TX 5570MHz

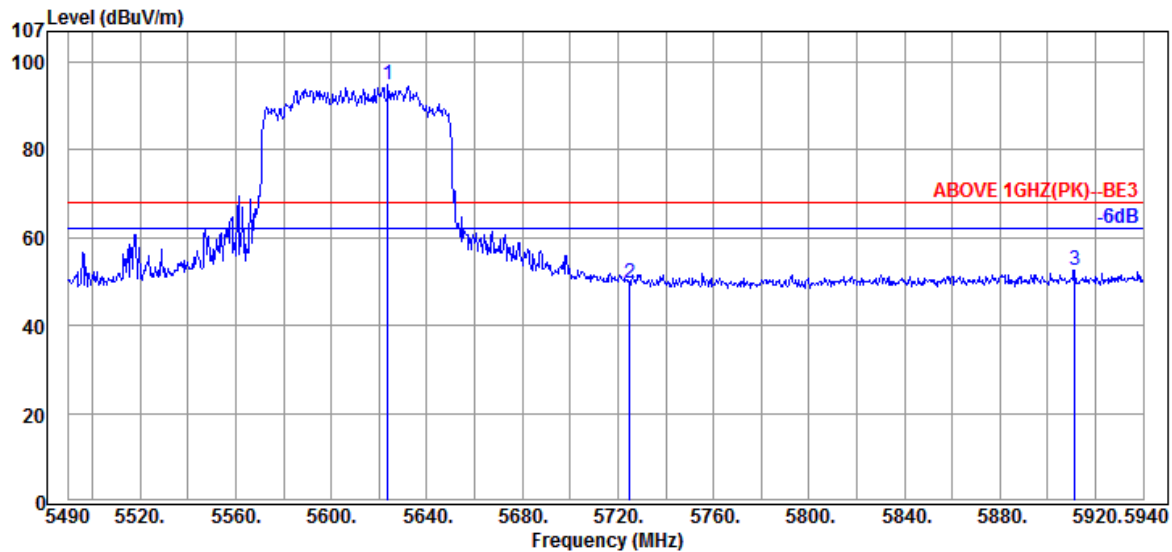

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5623.65	34.87	10.89	49.06	94.82	---	---	Peak
5724.90	34.83	10.91	3.95	49.69	68.20	18.51	Peak
5911.20	35.67	10.93	5.99	52.59	68.20	15.61	Peak

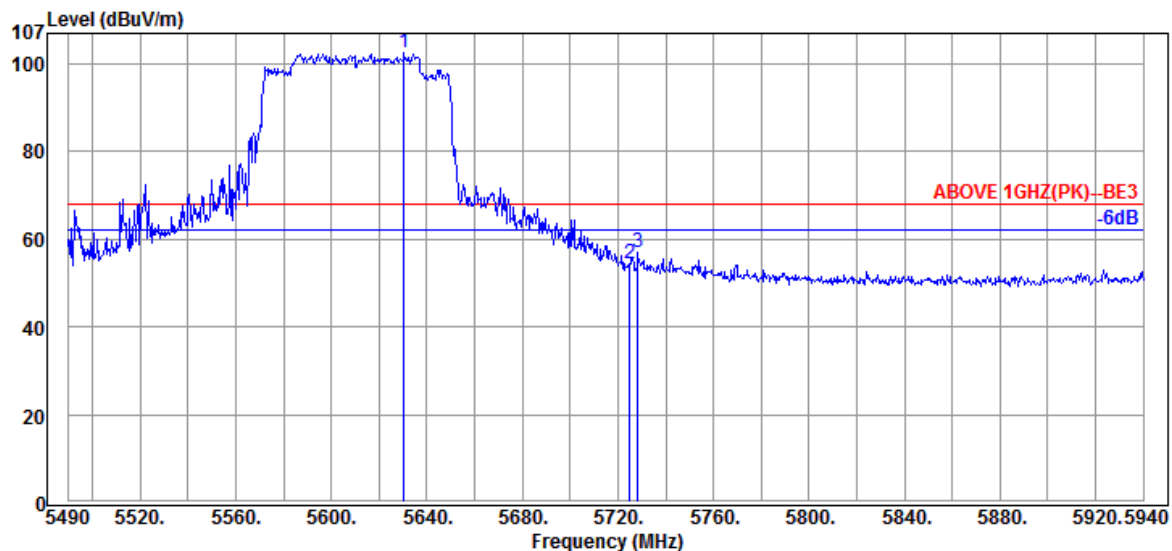

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5630.40	34.87	10.89	56.97	102.73	---	---	Peak
5724.90	34.83	10.91	8.76	54.50	68.20	13.70	Peak
5728.50	34.83	10.91	11.32	57.06	68.20	11.14	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1909185

Report Number: EM-F190365

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Test SKU: SKU #1

Mode	802.11a	UNII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	37.78	14.84	-4.12	48.50	54.00	5.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	37.78	14.84	-3.41	49.21	54.00	4.79	Peak

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	37.84	14.86	-4.24	48.46	54.00	5.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	37.84	14.86	-3.20	49.50	54.00	4.50	Peak

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	38.14	15.20	-4.91	48.43	54.00	5.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	38.14	15.20	-2.70	50.64	54.00	3.36	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	38.42	15.33	-5.09	48.66	54.00	5.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	38.42	15.33	-4.10	49.65	54.00	4.35	Peak

Mode	802.11a	UNII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.00	38.32	15.35	-3.97	49.70	54.00	4.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.00	38.32	15.35	-3.66	50.01	54.00	3.99	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10480.00	37.78	14.84	-4.18	48.44	54.00	5.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10480.00	37.78	14.84	-4.96	47.66	54.00	6.34	Peak

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.00	37.84	14.86	-4.00	48.70	54.00	5.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.00	37.84	14.86	-4.33	48.37	54.00	5.63	Peak

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.00	38.14	15.20	-3.01	50.33	54.00	3.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.00	38.14	15.20	-3.85	49.49	54.00	4.51	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.00	38.42	15.33	-3.65	50.10	54.00	3.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.00	38.42	15.33	-4.95	48.80	54.00	5.20	Peak

Mode	802.11n-HT20	UNII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.00	38.44	15.39	-4.15	49.68	54.00	4.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.00	38.44	15.39	-3.95	49.88	54.00	4.12	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	37.76	14.83	-4.39	48.20	54.00	5.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	37.76	14.83	-3.62	48.97	54.00	5.03	Peak

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	37.88	14.87	-4.64	48.11	54.00	5.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	37.88	14.87	-3.19	49.56	54.00	4.44	Peak

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	38.32	15.28	-5.18	48.42	54.00	5.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	38.32	15.28	-5.50	48.10	54.00	5.90	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11420.00	38.46	15.32	-4.66	49.12	54.00	4.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11420.00	38.46	15.32	-4.66	49.12	54.00	4.88	Peak

Mode	802.11n-HT40	UNII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11590.00	38.48	15.40	-4.41	49.47	54.00	4.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11590.00	38.48	15.40	-4.29	49.59	54.00	4.41	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.00	37.72	14.81	-2.83	49.70	54.00	4.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.00	37.72	14.81	-3.87	48.66	54.00	5.34	Peak

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.00	37.96	14.89	-3.62	49.23	54.00	4.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.00	37.96	14.89	-4.17	48.68	54.00	5.32	Peak

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.00	38.12	15.22	-3.55	49.79	54.00	4.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.00	38.12	15.22	-3.63	49.71	54.00	4.29	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	38.44	15.30	-5.07	48.67	54.00	5.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	38.44	15.30	-4.52	49.22	54.00	4.78	Peak

Mode	802.11ac-VHT80	UNII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.00	38.40	15.38	-4.65	49.13	54.00	4.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.00	38.40	15.38	-4.31	49.47	54.00	4.53	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	37.80	14.85	-4.69	47.96	54.00	6.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	37.80	14.85	-3.99	48.66	54.00	5.34	Peak

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.00	38.16	15.19	-3.98	49.37	54.00	4.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.00	38.16	15.19	-3.80	49.55	54.00	4.45	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	37.78	14.84	-4.37	48.25	54.00	5.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	37.78	14.84	-3.28	49.34	54.00	4.66	Peak

Mode	802.11ax-HE20	UNII Band	II-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	37.84	14.86	-3.44	49.26	54.00	4.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	37.84	14.86	-3.78	48.92	54.00	5.08	Peak

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	38.14	15.20	-3.58	49.76	54.00	4.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	38.14	15.20	-4.81	48.53	54.00	5.47	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	38.42	15.33	-4.85	48.90	54.00	5.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	38.42	15.33	-5.76	47.99	54.00	6.01	Peak

Mode	802.11ax-HE20	UNII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.00	38.44	15.39	-4.47	49.36	54.00	4.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.00	38.44	15.39	-5.22	48.61	54.00	5.39	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	37.76	14.83	-3.84	48.75	54.00	5.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	37.76	14.83	-4.22	48.37	54.00	5.63	Peak

Mode	802.11ax-HE40	UNII Band	II-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	37.88	14.87	-4.42	48.33	54.00	5.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	37.88	14.87	-4.32	48.43	54.00	5.57	Peak

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	38.32	15.28	-4.90	48.70	54.00	5.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	38.32	15.28	-5.18	48.42	54.00	5.58	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.00	38.46	15.32	-3.90	49.88	54.00	4.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.00	38.46	15.32	-5.33	48.45	54.00	5.55	Peak

Mode	802.11ax-HE40	UNII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.00	38.48	15.40	-4.87	49.01	54.00	4.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.00	38.48	15.40	-3.33	50.55	54.00	3.45	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.00	37.72	14.81	-4.42	48.11	54.00	5.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.00	37.72	14.81	-3.63	48.90	54.00	5.10	Peak

Mode	802.11ax-HE80	UNII Band	II-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.00	37.96	14.89	-4.34	48.51	54.00	5.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.00	37.96	14.89	-3.88	48.97	54.00	5.03	Peak

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.00	38.12	15.22	-4.01	49.33	54.00	4.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.00	38.12	15.22	-4.19	49.15	54.00	4.85	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	38.44	15.30	-4.06	49.68	54.00	4.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	38.44	15.30	-5.40	48.34	54.00	5.66	Peak

Mode	802.11ax-HE80	UNII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.00	38.40	15.38	-3.69	50.09	54.00	3.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.00	38.40	15.38	-4.52	49.26	54.00	4.74	Peak

Mode	802.11ax-HE160	UNII Band	II-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	37.80	14.85	-4.69	47.96	54.00	6.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	37.80	14.85	-3.99	48.66	54.00	5.34	Peak

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.00	38.16	15.19	-3.98	49.37	54.00	4.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.00	38.16	15.19	-3.80	49.55	54.00	4.45	Peak

Test SKU: SKU #2

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	38.45	15.30	-4.21	49.54	54.00	4.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	38.45	15.30	-4.19	49.56	54.00	4.44	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

A.3 26dB/6dB BANDWIDTH

Test Date	2019/09/23~10/3	Temp./Hum.	24°C/57%
Cable Loss	1	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Test Model	14Z90N

A.3.1 26dB/6dB Bandwidth Result

● For 26dB Bandwidth

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	I	5180	22.81	16.805	Reference only
		5200	22.97	16.807	
		5240	23.88	16.796	
	II-2A	5260	23.28	16.823	
		5300	22.95	16.805	
		5320	22.65	16.803	
	II-2C	5500	23.54	16.807	
		5580	23.23	16.767	
		5700	23.08	16.870	
		5720	23.04	16.830	
802.11n-HT20	I	5180	23.71	17.979	Reference only
		5200	23.62	17.944	
		5240	23.07	18.056	
	II-2A	5260	23.53	17.940	
		5300	23.70	17.984	
		5320	23.51	17.953	
	II-2C	5500	23.87	18.008	
		5580	25.08	17.995	
		5700	24.13	17.941	
		5720	24.57	18.035	

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11n-HT40	I	5190	43.90	36.525	Reference only
		5230	44.43	36.413	
	II-2A	5270	44.39	36.422	
		5310	43.23	36.372	
	II-2C	5510	43.15	36.419	
		5550	42.94	36.401	
		5670	43.38	36.409	
		5710	42.80	36.408	
802.11ac-VHT80	I	5210	83.82	75.168	Reference only
	II-2A	5290	84.27	75.078	
	II-2C	5530	84.12	75.110	
		5610	83.55	75.154	
		5690	83.09	75.118	
802.11ac-VHT160	I	5250	163.50	153.050	
	II-2A				
	II-2C	5570	162.60	153.080	

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	I	5180	24.43	19.033	Reference only
		5200	23.80	19.067	
		5240	23.57	19.038	
	II-2A	5260	23.66	19.099	
		5300	24.21	19.084	
		5320	23.91	19.124	
	II-2C	5500	24.21	19.120	
		5580	23.15	19.073	
		5700	23.74	19.095	
		5720	23.95	19.073	
802.11ax-HE40	I	5190	42.11	37.738	Reference only
		5230	42.47	37.818	
	II-2A	5270	42.56	37.861	
		5310	43.47	37.854	
	II-2C	5510	42.03	37.840	
		5550	42.74	37.768	
		5670	41.08	37.850	
		5710	42.61	37.787	
802.11ax-HE80	I	5210	81.78	76.665	Reference only
	II-2A	5290	81.97	76.571	
	II-2C	5530	81.83	76.536	
		5610	81.00	76.499	
		5690	82.38	76.536	
802.11ax-HE160	I	5250	162.50	154.73	
	II-2A				
	II-2C	5570	163.50	155.11	

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	I	5180	26/10	19.87	18.456	Reference only
			52/37	20.20	18.204	
			106/53	20.86	18.233	
	II-2A	5320	26/8	20.14	18.518	
			52/40	21.49	18.158	
			106/54	20.57	17.889	
	II-2C	5500	26/10	20.27	18.583	
			52/37	20.87	18.215	
			106/53	20.89	18.236	
		5700	26/8	19.65	18.236	
			52/40	21.11	18.404	
			106/54	21.62	18.220	
802.11ax-HE40	I	5190	242/61	23.43	18.846	Reference only
	II-2A	5310	242/62	25.43	18.771	
	II-2C	5510	242/61	24.54	18.796	
		5670	242/62	23.92	18.841	
802.11ax-HE80	I	5210	484/65	41.80	37.553	Reference only
	II-2A	5290	484/66	40.97	37.466	
	II-2C	5530	484/65	42.78	37.403	
		5610	484/66	41.89	37.561	
802.11ax-HE160	I/ II-2A	5250	996/67	81.81	76.779	Reference only
			996/S67	81.49	76.969	
	II-2C	5570	996/67	81.68	76.461	
			996/S67	81.49	76.802	

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● For 6dB Bandwidth

Mode	UNII Band	Centre Frequency (MHz)	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	III	5745	16.39	16.597	≥ 500kHz
		5785	16.43	16.581	
		5825	16.38	16.571	
802.11n-HT20	III	5745	17.60	17.747	
		5785	17.81	17.821	
		5825	17.79	17.798	
802.11n-HT40	III	5755	36.38	36.296	
		5795	36.42	36.311	
802.11ac-VHT80	III	5775	52.67	75.108	
802.11ax-HE20	III	5745	19.00	19.012	
		5785	19.07	18.984	
		5825	18.34	19.010	
802.11ax-HE40	III	5755	38.03	37.798	
		5795	37.75	37.775	
802.11ax-HE80	III	5775	68.96	76.654	

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	III	5745	26/10	17.03	18.063	≥ 500kHz
			52/37	17.04	18.137	
			106/53	17.04	18.063	
	III	5825	26/8	2.050	18.502	
			52/40	16.97	17.979	
			106/54	17.14	18.304	
802.11ax-HE40	III	5755	242/61	18.89	18.803	
	III	5795	242/62	18.74	18.805	
802.11ax-HE80	III	5775	484/65	37.69	37.459	
			484/66	37.68	37.422	