

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	93
A.2.3 Emissions in Non-restricted Frequency Bands:.....	95
A.3 DTS/OCCUPIED BANDWIDTH.....	96
A.3.1 Emission Bandwidth Result.....	96
A.3.2 Measurement Plots	98
A.4 MAXIMUM PEAK OUTPUT POWER	110
A.4.1 Peak Output Power	110
A.4.2 Average Output Power (Reporting only).....	121
A.4.3 Measurement Plots	129
A.5 EMISSION LIMITATIONS	131
A.6 POWER SPECTRAL DENSITY	158
A.6.1 Power Spectral Density Result	158
A.6.2 Measurement Plots	160


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)		

Data: 3 File: D:\test data\REPORT\2022\1M2201XXX\1M2201239\1M2201239-C-D-RF-EM6 (4

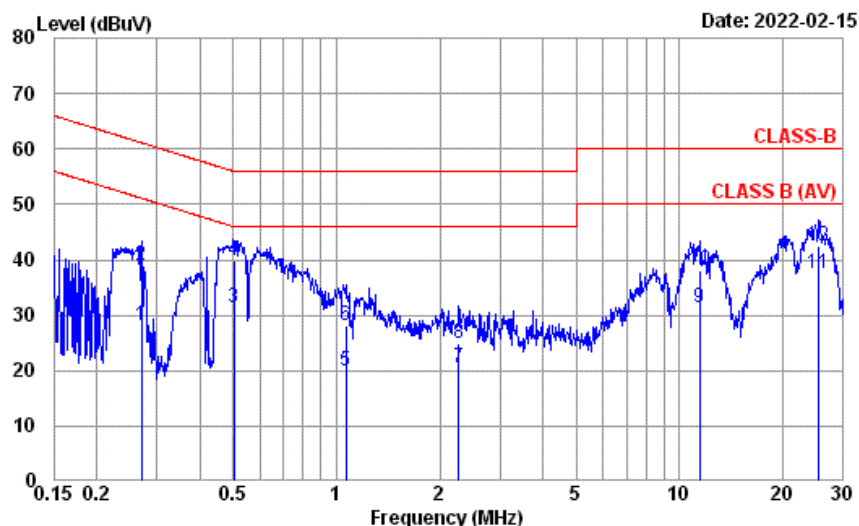

Site No. : No.8 Shielded Room Data No. : 3
Instrument 1 : Receiver ESR(774)
Instrument 2 : EMI432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : NEUTRAL
Environment : 23°C / 60% Engineer : Chucky Chiu
EUT Model : 14Z90Q Test Rating : 120Vac/60Hz
Test Mode : Operating
INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.270	10.38	0.03	9.85	7.84	28.10	51.12	23.02	Average
2	0.270	10.38	0.03	9.85	18.78	39.04	61.12	22.08	QP
3	0.502	10.37	0.03	9.85	11.20	31.45	46.00	14.55	Average
4	0.502	10.37	0.03	9.85	19.67	39.92	56.00	16.08	QP
5	1.065	10.38	0.04	9.85	-0.31	19.96	46.00	26.04	Average
6	1.065	10.38	0.04	9.85	7.80	28.07	56.00	27.93	QP
7	2.273	10.42	0.07	9.86	0.23	20.58	46.00	25.42	Average
8	2.273	10.42	0.07	9.86	4.42	24.77	56.00	31.23	QP
9	11.438	10.76	0.15	9.90	10.62	31.43	50.00	18.57	Average
10	11.438	10.76	0.15	9.90	17.30	38.11	60.00	21.89	QP
11	25.456	11.27	0.22	9.97	15.97	37.43	50.00	12.57	Average
12	25.456	11.27	0.22	9.97	21.13	42.59	60.00	17.41	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)		

Data: 4 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201239\C1M2201239-C-D-RF-EM6 (4) Date: 2022-02-15

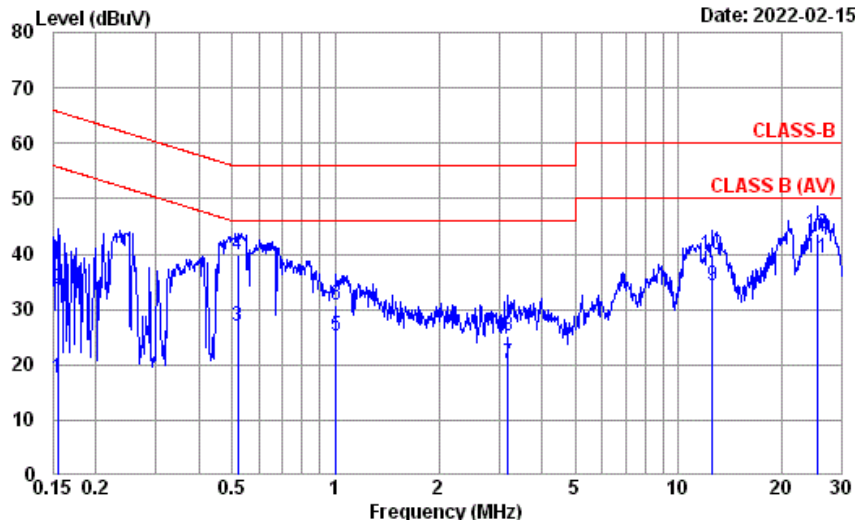

Site No. : No.8 Shielded Room Data No. : 4
Instrument 1 : Receiver ESR(774)
Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 23°C / 60% Engineer : Chucky Chiu
EUT Model : 14Z90Q Test Rating : 120Vac/60Hz
Test Mode : Operating
INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.155	10.40	0.03	9.85	-2.74	17.54	55.74	38.20	Average
2	0.155	10.40	0.03	9.85	13.42	33.70	65.74	32.04	QP
3	0.518	10.37	0.03	9.85	6.75	27.00	46.00	19.00	Average
4	0.518	10.37	0.03	9.85	19.68	39.93	56.00	16.07	QP
5	1.005	10.38	0.04	9.85	5.02	25.29	46.00	20.71	Average
6	1.005	10.38	0.04	9.85	10.62	30.89	56.00	25.11	QP
7	3.190	10.41	0.08	9.86	-0.05	20.30	46.00	25.70	Average
8	3.190	10.41	0.08	9.86	4.74	25.09	56.00	30.91	QP
9	12.582	10.63	0.15	9.90	13.63	34.31	50.00	15.69	Average
10	12.582	10.63	0.15	9.90	19.10	39.78	60.00	20.22	QP
11	25.456	10.83	0.22	9.97	18.34	39.36	50.00	10.64	Average
12	25.456	10.83	0.22	9.97	22.63	43.65	60.00	16.35	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

Data: 2 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201239\C1M2201239-C-D-RF.EM6 (4)

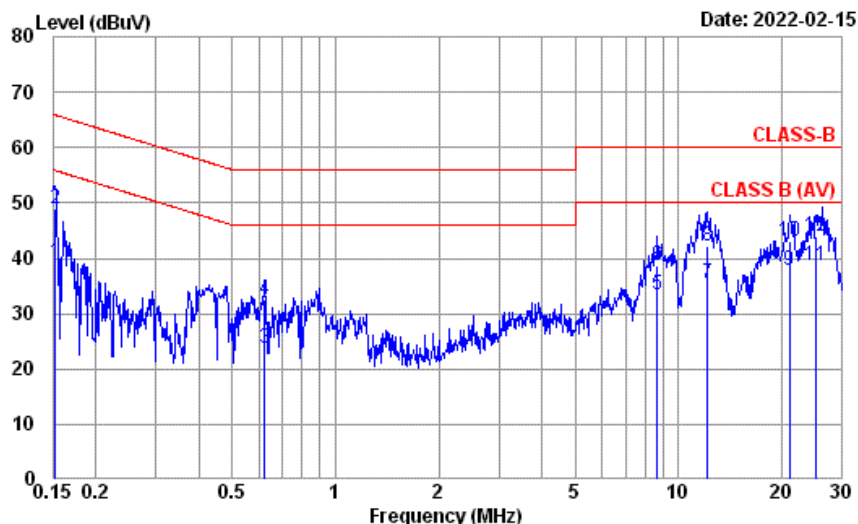

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENH432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 23°C / 60%	Engineer	: Chucky Chiu
EUT Model	: 14Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	18.88	39.17	55.87	16.70	Average
2	0.152	10.41	0.03	9.85	28.51	48.80	65.87	17.07	QP
3	0.621	10.37	0.03	9.85	3.48	23.73	46.00	22.27	Average
4	0.621	10.37	0.03	9.85	12.18	32.43	56.00	23.57	QP
5	8.683	10.64	0.13	9.88	12.67	33.32	50.00	16.68	Average
6	8.683	10.64	0.13	9.88	17.99	38.64	60.00	21.36	QP
7	12.124	10.79	0.15	9.90	14.53	35.37	50.00	14.63	Average
8	12.124	10.79	0.15	9.90	21.22	42.06	60.00	17.94	QP
9	21.035	11.13	0.20	9.95	16.56	37.84	50.00	12.16	Average
10	21.035	11.13	0.20	9.95	21.91	43.19	60.00	16.81	QP
11	25.055	11.26	0.22	9.97	17.33	38.78	50.00	11.22	Average
12	25.055	11.26	0.22	9.97	22.43	43.88	60.00	16.12	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

Data: 1 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201239\C1M2201239-C-D-RF-EM6 (4

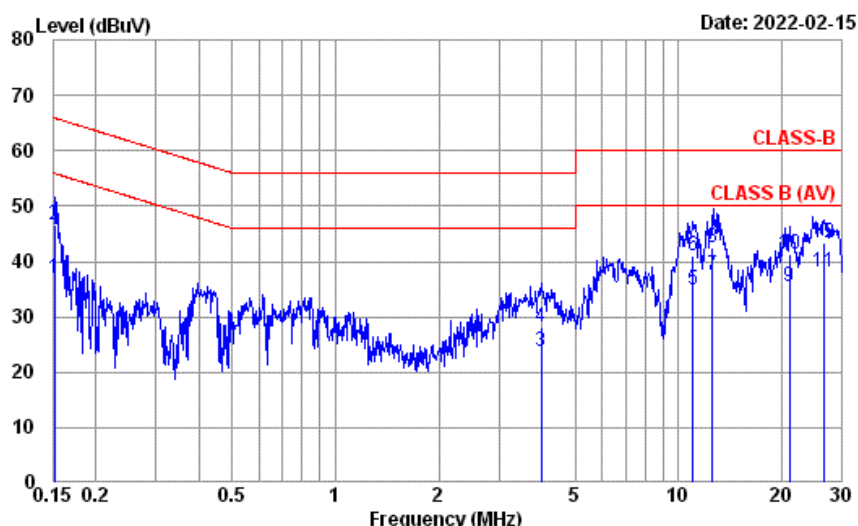

Site No. : No.8 Shielded Room Data No. : 1
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 23°C / 60% Engineer : Chucky Chiu
EUT Model : I4Z90Q Test Rating : 120Vac/60Hz
Test Mode : Operating
Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	16.62	36.90	55.91	19.01	Average
2	0.152	10.40	0.03	9.85	26.27	46.55	65.91	19.36	QP
3	3.985	10.42	0.09	9.86	3.33	23.70	46.00	22.30	Average
4	3.985	10.42	0.09	9.86	7.68	28.05	56.00	27.95	QP
5	11.021	10.59	0.15	9.89	14.24	34.87	50.00	15.13	Average
6	11.021	10.59	0.15	9.89	20.36	40.99	60.00	19.01	QP
7	12.582	10.63	0.15	9.90	16.83	37.51	50.00	12.49	Average
8	12.582	10.63	0.15	9.90	21.94	42.62	60.00	17.38	QP
9	21.035	10.78	0.20	9.95	14.46	35.39	50.00	14.61	Average
10	21.035	10.78	0.20	9.95	20.29	41.22	60.00	18.78	QP
11	26.418	10.84	0.23	9.98	17.05	38.10	50.00	11.90	Average
12	26.418	10.84	0.23	9.98	22.19	43.24	60.00	16.76	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/01/26~02/14	Temp./Hum.	19~23°C/66~72%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

● SKU #1 (with INPAQ Antenna)

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	39.07	31.10	40.00	8.90	Peak
153.190	16.10	2.89	32.28	45.38	32.09	43.50	11.41	Peak
317.120	19.50	4.53	32.25	47.51	39.29	46.00	6.71	Peak
598.420	24.30	6.77	32.31	37.90	36.66	46.00	9.34	Peak
899.120	26.30	8.44	31.50	36.21	39.45	46.00	6.55	Peak
988.360	27.05	8.92	30.65	28.57	33.89	54.00	20.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	40.56	32.59	40.00	7.41	Peak
125.060	17.71	2.58	32.31	46.32	34.30	43.50	9.20	Peak
317.120	19.50	4.53	32.25	45.74	37.52	46.00	8.48	Peak
593.570	24.23	6.75	32.31	37.34	36.01	46.00	9.99	Peak
903.970	26.33	8.46	31.46	35.38	38.71	46.00	7.29	Peak
965.080	26.85	8.79	30.89	30.87	35.62	54.00	18.38	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	38.42	30.45	40.00	9.55	Peak
153.190	16.10	2.89	32.28	46.31	33.02	43.50	10.48	Peak
317.120	19.50	4.53	32.25	46.91	38.69	46.00	7.31	Peak
593.570	24.23	6.75	32.31	36.47	35.14	46.00	10.86	Peak
903.970	26.33	8.46	31.46	36.55	39.88	46.00	6.12	Peak
970.900	26.91	8.83	30.81	29.94	34.87	54.00	19.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	43.25	35.28	40.00	4.72	Peak
125.060	17.71	2.58	32.31	45.38	33.36	43.50	10.14	Peak
423.820	21.83	5.77	32.23	42.00	37.37	46.00	8.63	Peak
593.570	24.23	6.75	32.31	36.82	35.49	46.00	10.51	Peak
903.970	26.33	8.46	31.46	37.89	41.22	46.00	4.78	Peak
967.990	26.88	8.81	30.89	30.99	35.79	54.00	18.21	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **SKU #2 (with LUXSHARE-ICT Antenna)**

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
85.290	13.89	2.10	32.36	42.57	26.20	40.00	13.80	Peak
152.220	16.17	2.88	32.28	45.12	31.89	43.50	11.61	Peak
220.120	16.41	3.57	32.24	50.71	38.45	46.00	7.55	Peak
593.570	24.23	6.75	32.31	36.31	34.98	46.00	11.02	Peak
896.210	26.29	8.42	31.50	36.40	39.61	46.00	6.39	Peak
988.360	27.05	8.92	30.65	33.12	38.44	54.00	15.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.86	1.22	32.43	44.26	35.91	40.00	4.09	Peak
126.030	17.66	2.59	32.31	43.89	31.83	43.50	11.67	Peak
423.820	21.83	5.77	32.23	46.15	41.52	46.00	4.48	Peak
593.570	24.23	6.75	32.31	38.67	37.34	46.00	8.66	Peak
896.210	26.29	8.42	31.50	36.34	39.55	46.00	6.45	Peak
983.510	26.99	8.88	30.73	33.87	39.01	54.00	14.99	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
84.320	13.72	2.08	32.37	45.27	28.70	40.00	11.30	Peak
153.190	16.10	2.89	32.28	46.01	32.72	43.50	10.78	Peak
220.120	16.41	3.57	32.24	51.72	39.46	46.00	6.54	Peak
593.570	24.23	6.75	32.31	38.13	36.80	46.00	9.20	Peak
896.210	26.29	8.42	31.50	36.51	39.72	46.00	6.28	Peak
983.510	26.99	8.88	30.73	34.30	39.44	54.00	14.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	21.22	1.30	32.42	46.52	36.62	40.00	3.38	Peak
126.030	17.66	2.59	32.31	44.16	32.10	43.50	11.40	Peak
423.820	21.83	5.77	32.23	45.89	41.26	46.00	4.74	Peak
593.570	24.23	6.75	32.31	37.60	36.27	46.00	9.73	Peak
903.970	26.33	8.46	31.46	36.75	40.08	46.00	5.92	Peak
983.510	26.99	8.88	30.73	34.50	39.64	54.00	14.36	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

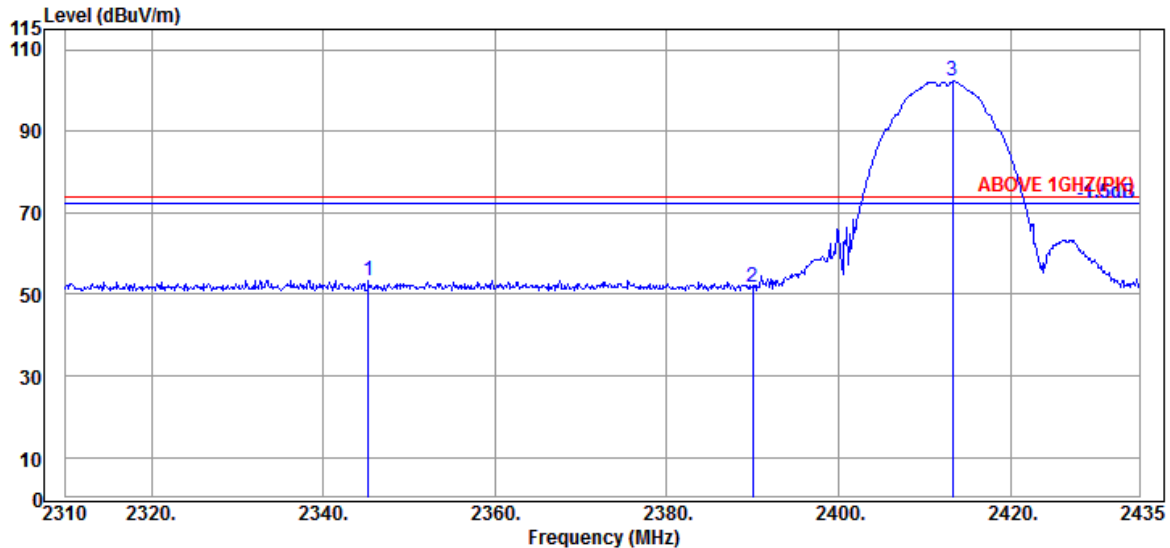

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2345.250	32.07	5.96	34.53	50.00	53.50	74.00	20.50	Peak
2390.000	31.89	6.04	34.54	48.30	51.69	74.00	22.31	Peak
@ 2412.500	31.94	6.07	34.54	98.72	102.19	---	---	Peak

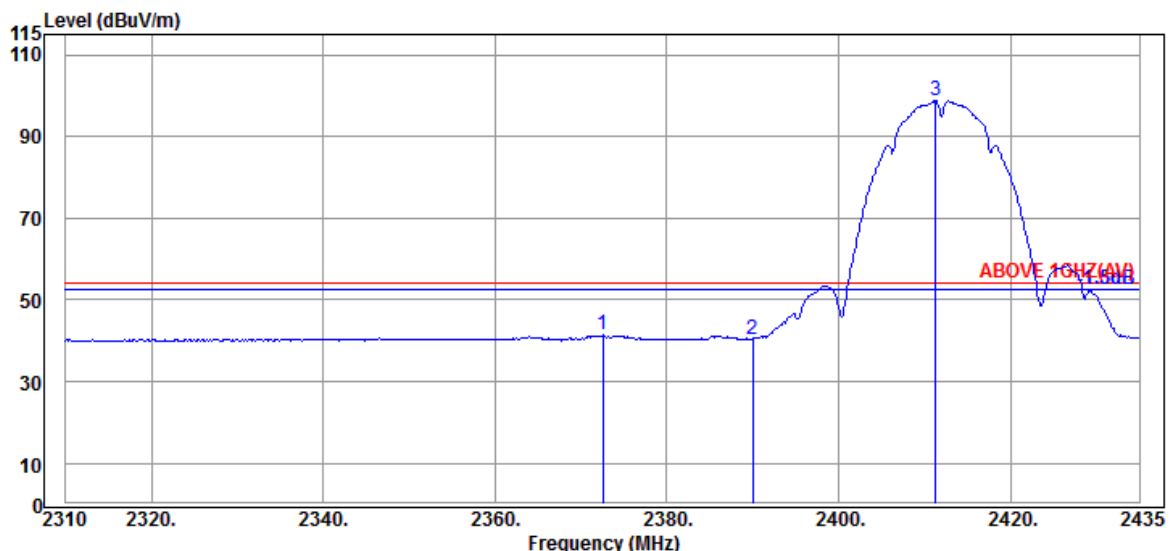

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.500	31.97	6.01	34.53	37.94	41.39	54.00	12.61	Average
2390.000	31.89	6.04	34.54	36.99	40.38	54.00	13.62	Average
@ 2411.250	31.94	6.07	34.54	95.35	98.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

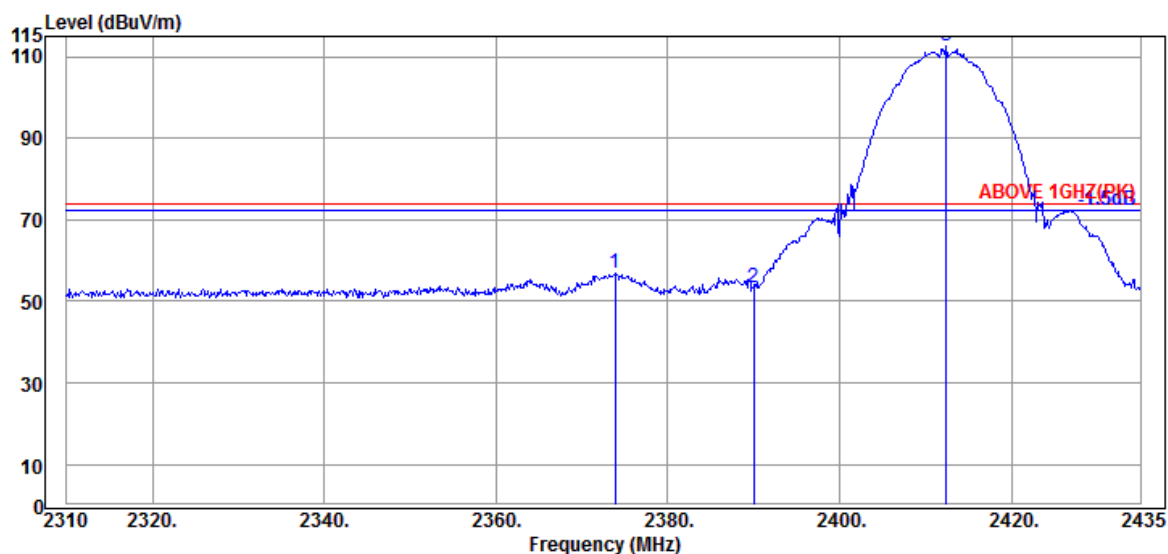

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.875	31.97	6.01	34.53	53.39	56.84	74.00	17.16	Peak
2390.000	31.89	6.04	34.54	49.81	53.20	74.00	20.80	Peak
@ 2412.375	31.94	6.07	34.54	109.14	112.61	---	---	Peak

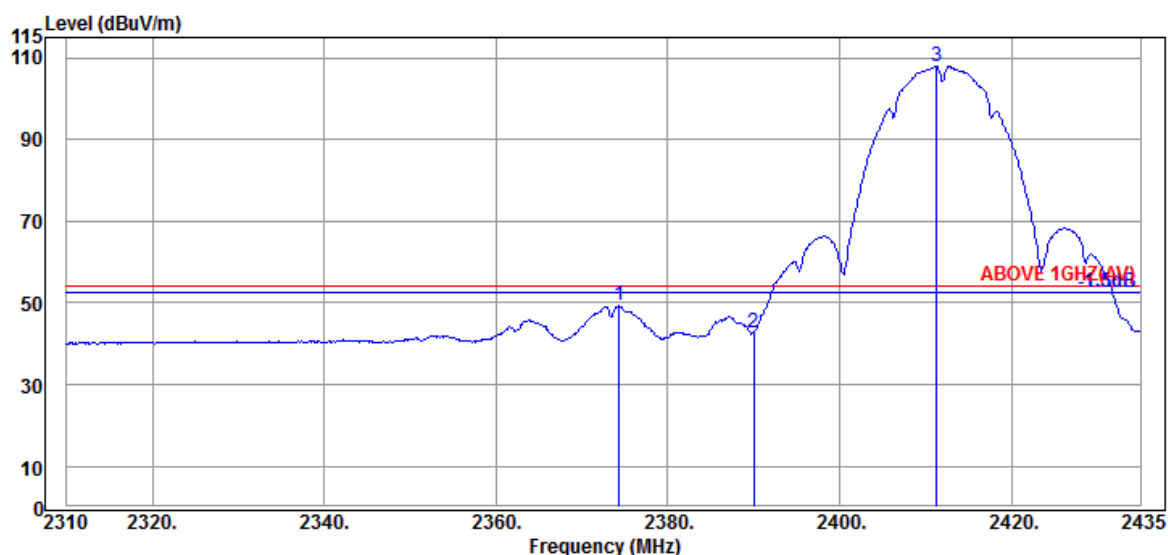

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.375	31.97	6.01	34.53	45.83	49.28	54.00	4.72	Average
2390.000	31.89	6.04	34.54	39.35	42.74	54.00	11.26	Average
@ 2411.250	31.94	6.07	34.54	104.48	107.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

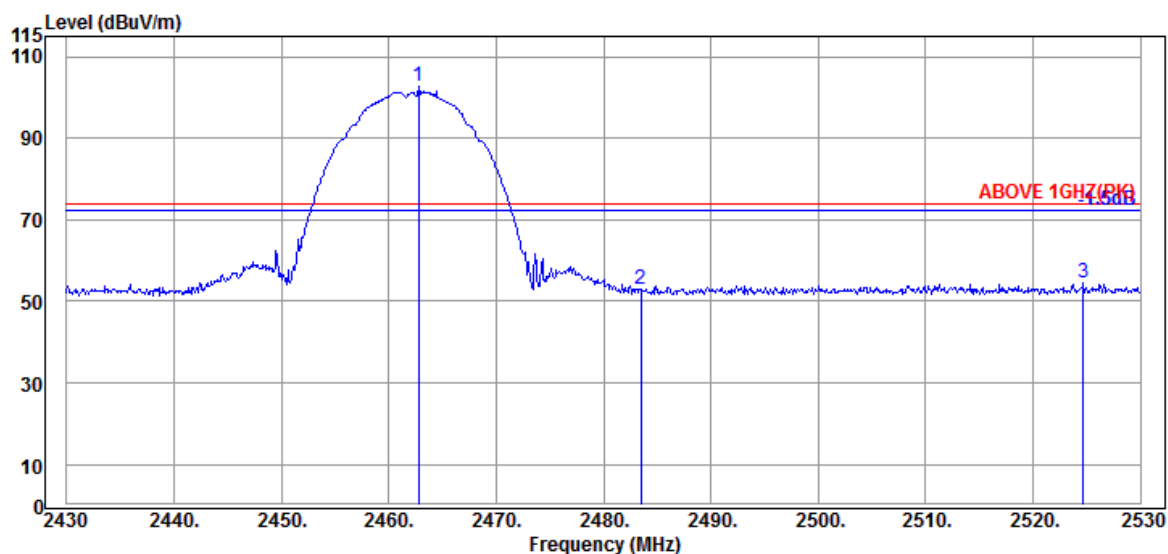

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	32.30	6.15	34.55	98.89	102.79	---	---	Peak
2483.500	32.30	6.18	34.55	49.10	53.03	74.00	20.97	Peak
2524.700	32.39	6.25	34.57	50.51	54.58	74.00	19.42	Peak

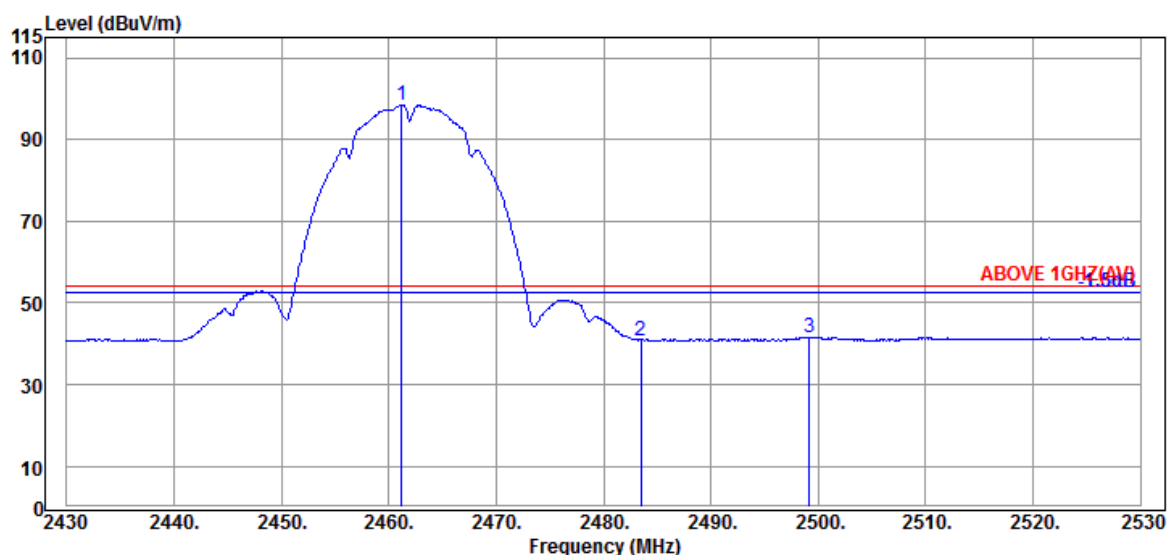

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.30	6.15	34.55	94.60	98.50	---	---	Average
2483.500	32.30	6.18	34.55	36.94	40.87	54.00	13.13	Average
2499.200	32.30	6.21	34.56	37.70	41.65	54.00	12.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

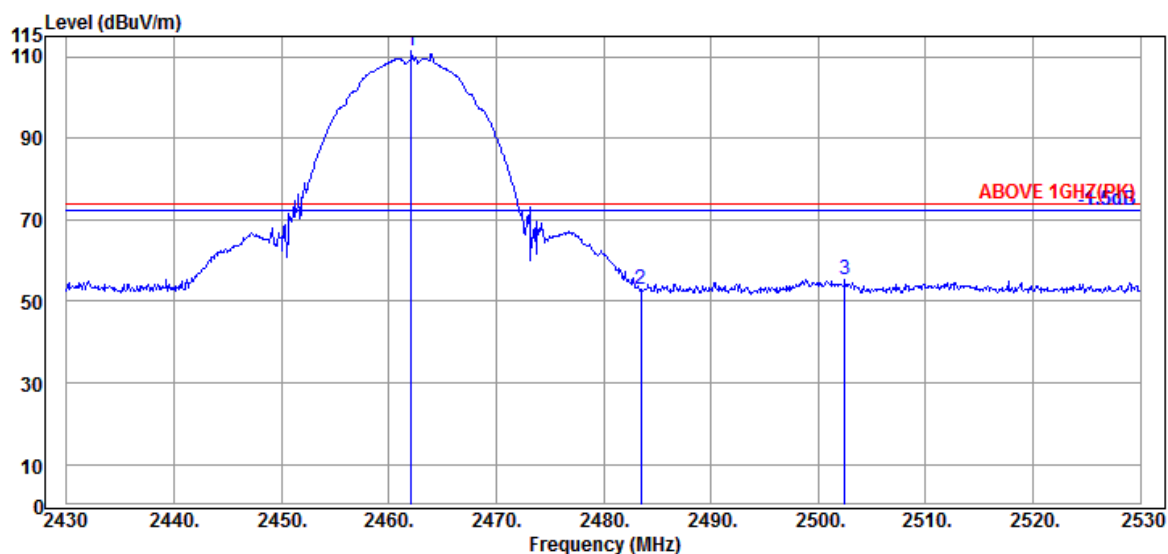

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.100	32.30	6.15	34.55	107.59	111.49	---	---	Peak
2483.500	32.30	6.18	34.55	49.00	52.93	74.00	21.07	Peak
2502.500	32.30	6.21	34.56	51.41	55.36	74.00	18.64	Peak

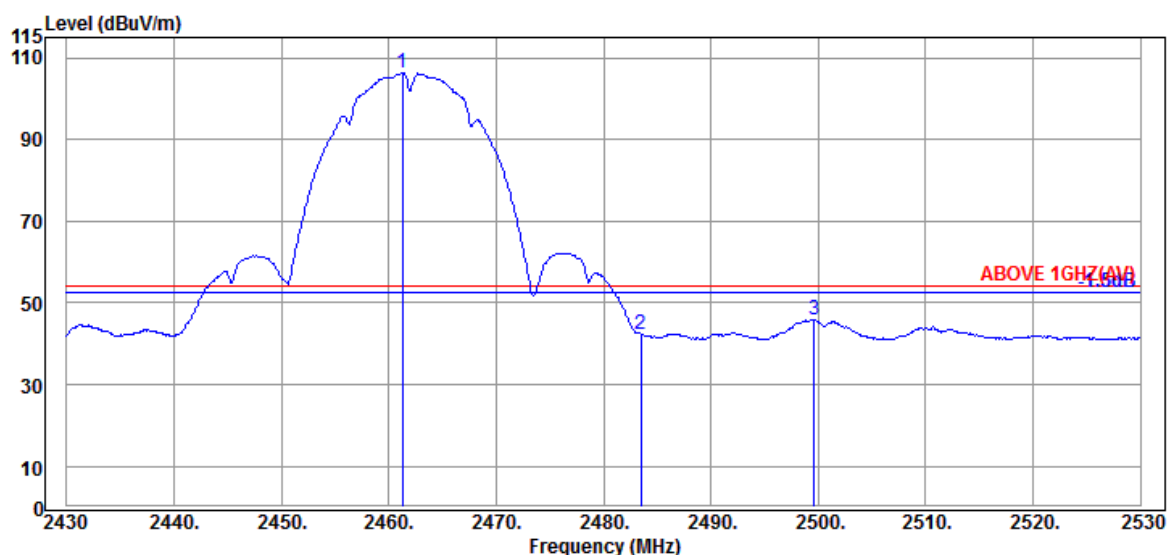

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	32.30	6.15	34.55	102.45	106.35	---	---	Average
2483.500	32.30	6.18	34.55	38.50	42.43	54.00	11.57	Average
2499.600	32.30	6.21	34.56	42.06	46.01	54.00	7.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

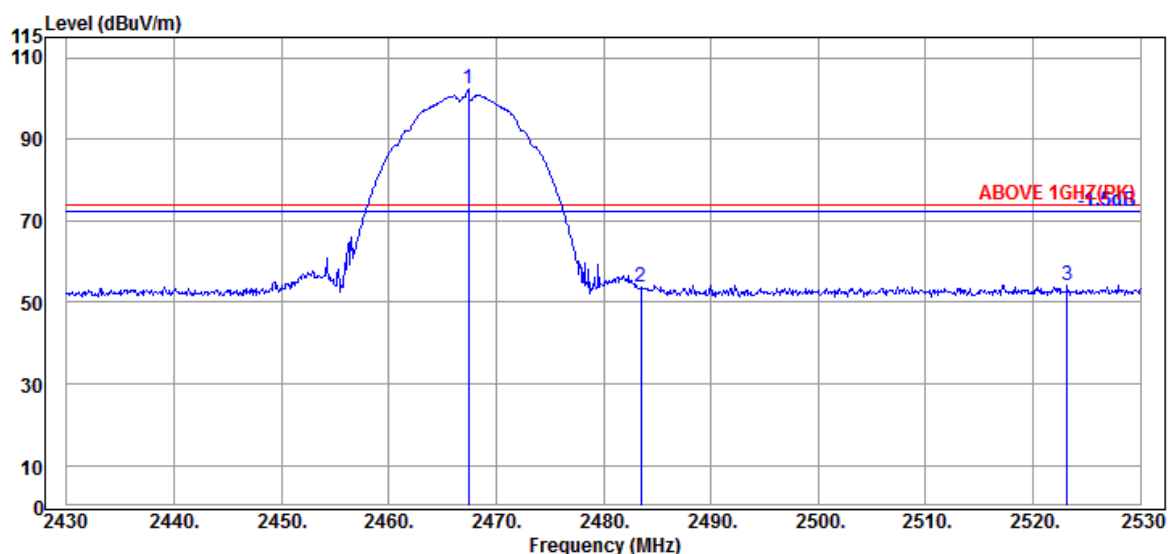

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.400	32.30	6.15	34.55	98.41	102.31	---	---	Peak
2483.500	32.30	6.18	34.55	49.78	53.71	74.00	20.29	Peak
2523.200	32.39	6.25	34.57	50.25	54.32	74.00	19.68	Peak

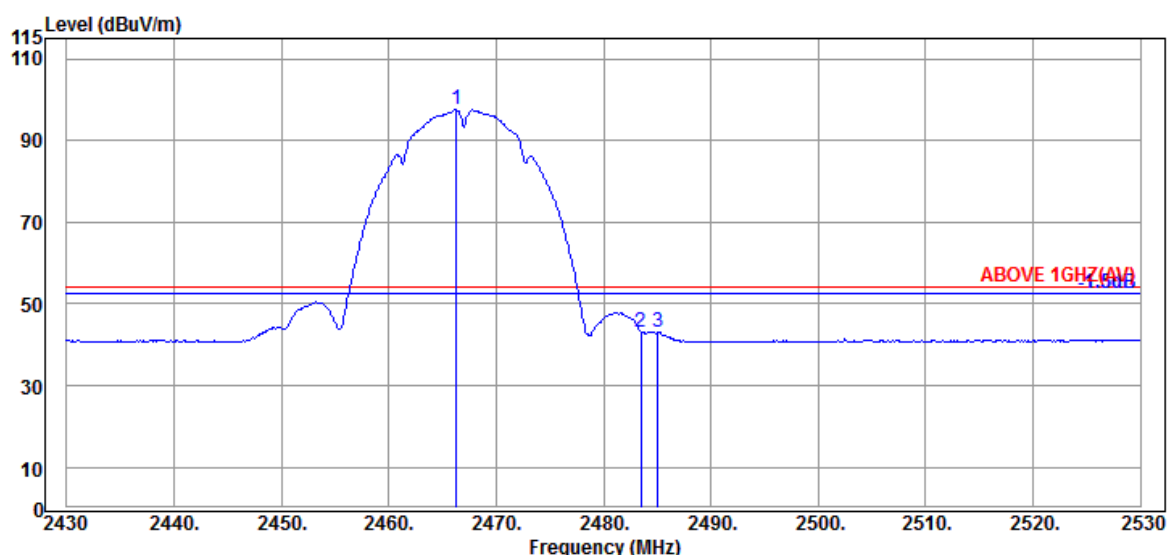

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	32.30	6.15	34.55	93.67	97.57	---	---	Average
2483.500	32.30	6.18	34.55	39.26	43.19	54.00	10.81	Average
2485.100	32.30	6.18	34.55	39.22	43.15	54.00	10.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

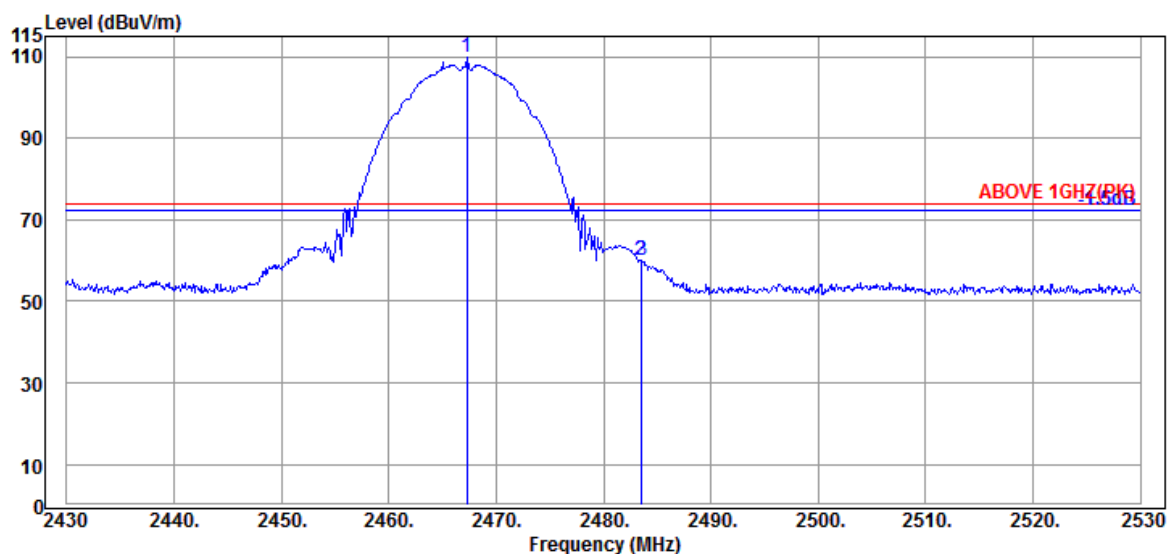

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.300	32.30	6.15	34.55	105.92	109.82	---	---	Peak
2483.500	32.30	6.18	34.55	55.95	59.88	74.00	14.12	Peak
2483.600	32.30	6.18	34.55	56.07	60.00	74.00	14.00	Peak

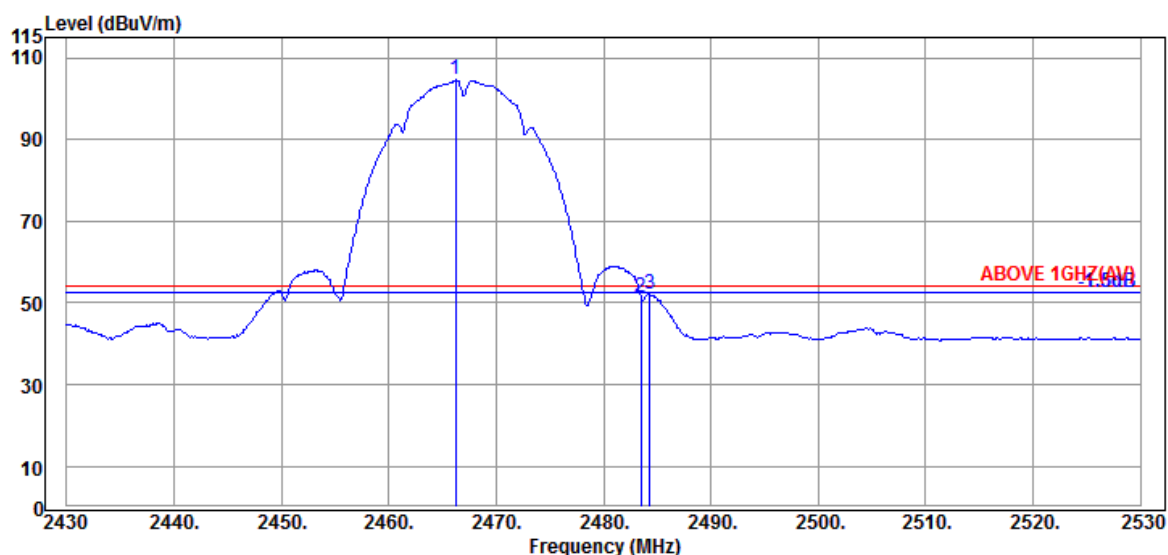

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.30	6.15	34.55	100.70	104.60	---	---	Average
2483.500	32.30	6.18	34.55	47.63	51.56	54.00	2.44	Average
2484.300	32.30	6.18	34.55	48.12	52.05	54.00	1.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

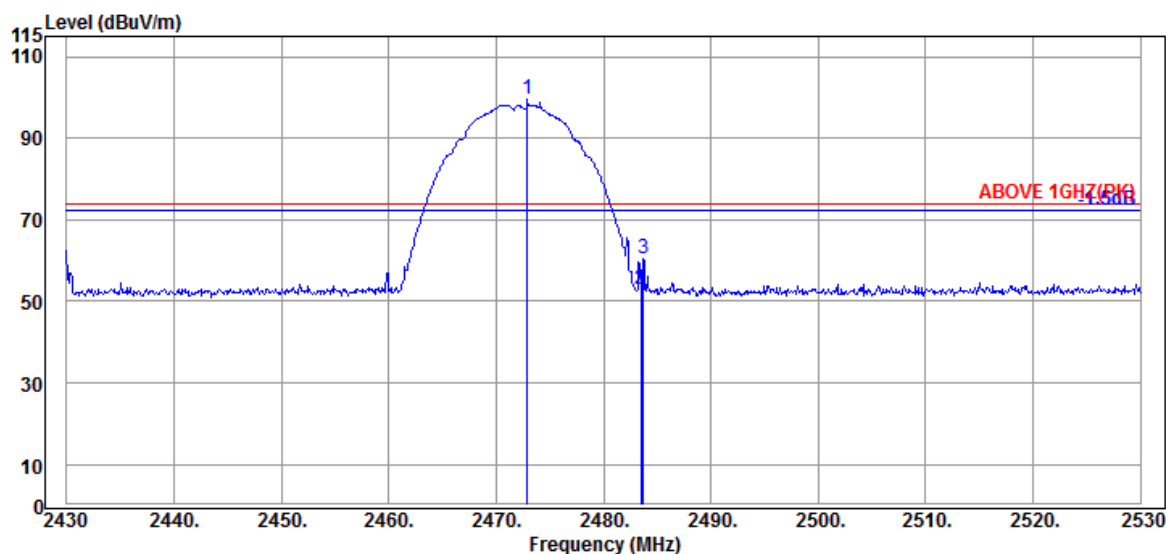

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.900	32.30	6.18	34.55	95.72	99.65	---	---	Peak
2483.500	32.30	6.18	34.55	49.00	52.93	74.00	21.07	Peak
2483.700	32.30	6.18	34.55	56.39	60.32	74.00	13.68	Peak

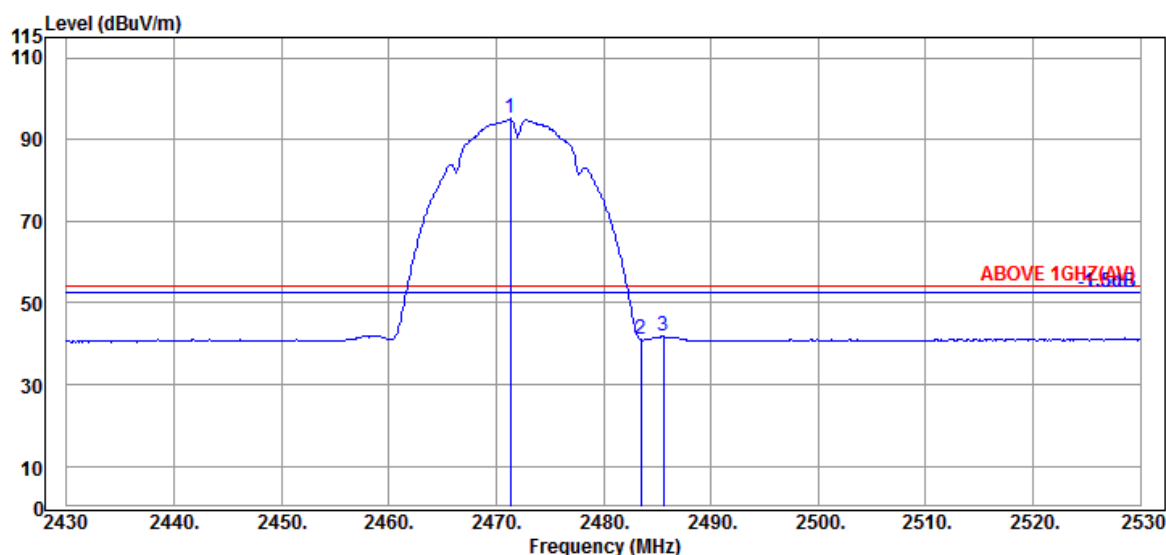

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	32.30	6.18	34.55	91.12	95.05	---	---	Average
2483.500	32.30	6.18	34.55	37.08	41.01	54.00	12.99	Average
2485.600	32.30	6.18	34.55	37.93	41.86	54.00	12.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

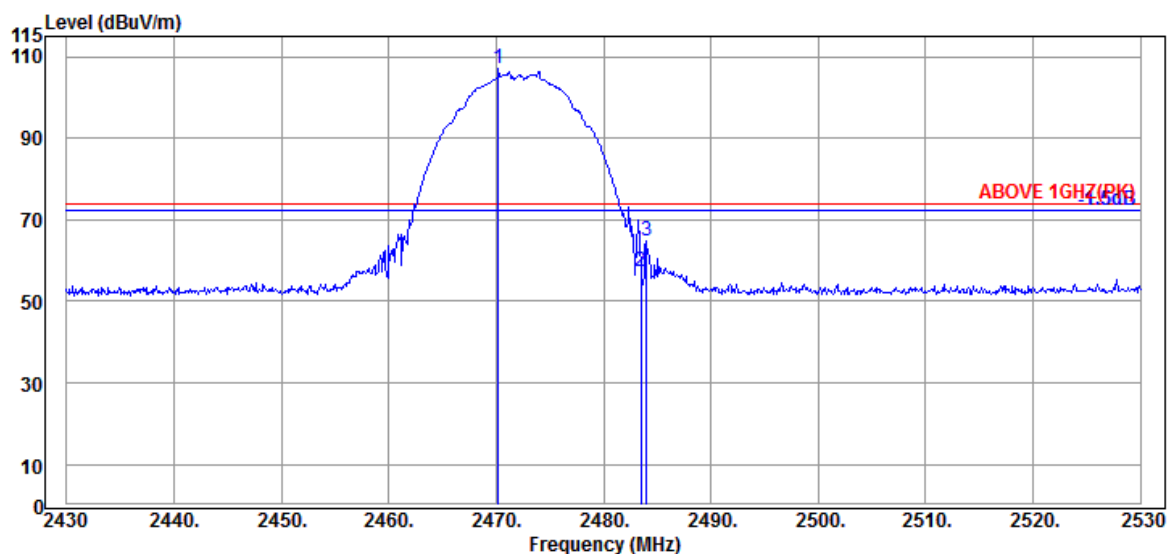

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.200	32.30	6.15	34.55	103.09	106.99	---	---	Peak
2483.500	32.30	6.18	34.55	53.36	57.29	74.00	16.71	Peak
2484.000	32.30	6.18	34.55	60.94	64.87	74.00	9.13	Peak

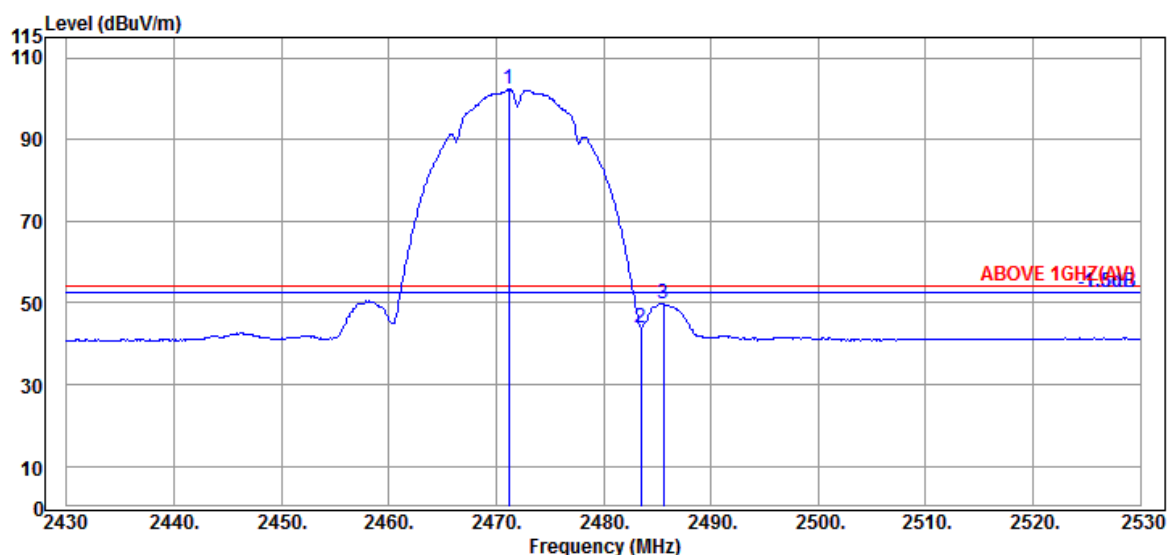

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	32.30	6.18	34.55	98.33	102.26	---	---	Average
2483.500	32.30	6.18	34.55	40.00	43.93	54.00	10.07	Average
2485.600	32.30	6.18	34.55	46.02	49.95	54.00	4.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

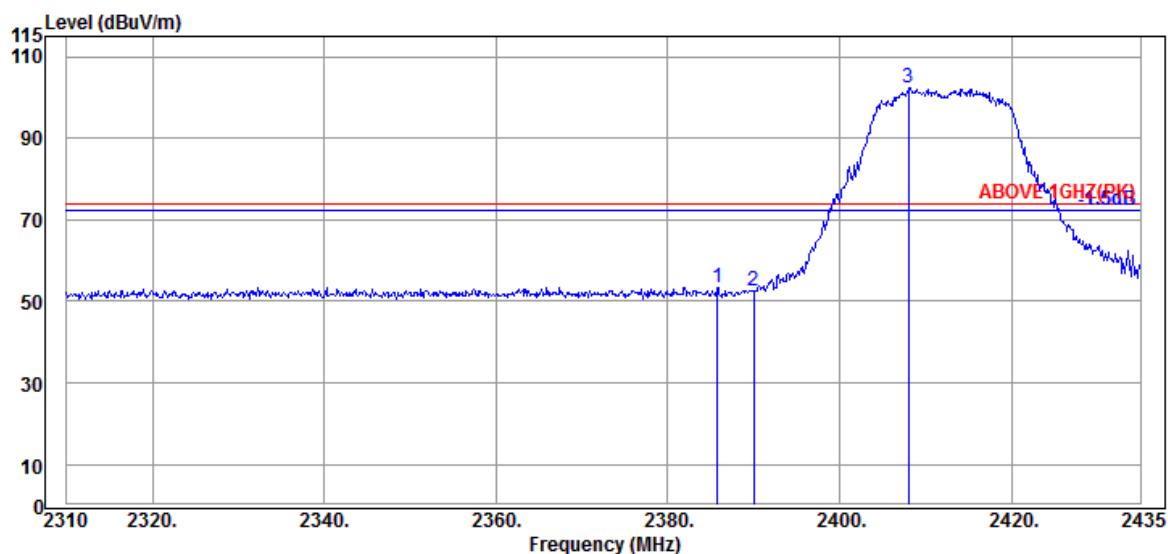

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.750	31.89	6.04	34.53	50.15	53.55	74.00	20.45	Peak
2390.000	31.89	6.04	34.54	49.29	52.68	74.00	21.32	Peak
@ 2408.000	31.87	6.07	34.54	98.90	102.30	---	---	Peak

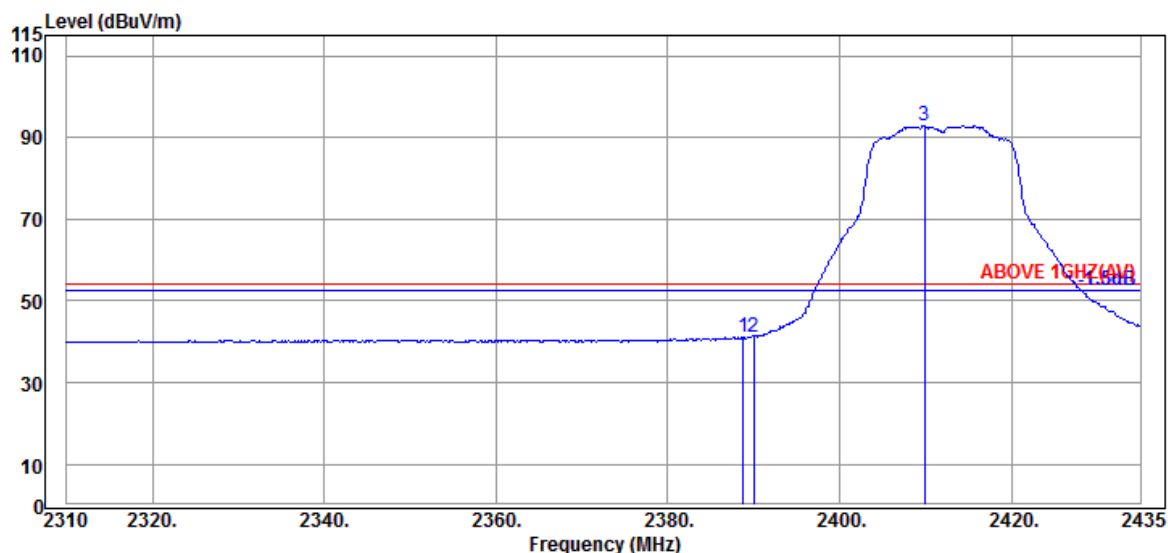

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	31.89	6.04	34.53	37.77	41.17	54.00	12.83	Average
2390.000	31.89	6.04	34.54	37.83	41.22	54.00	12.78	Average
@ 2409.875	31.87	6.07	34.54	89.55	92.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

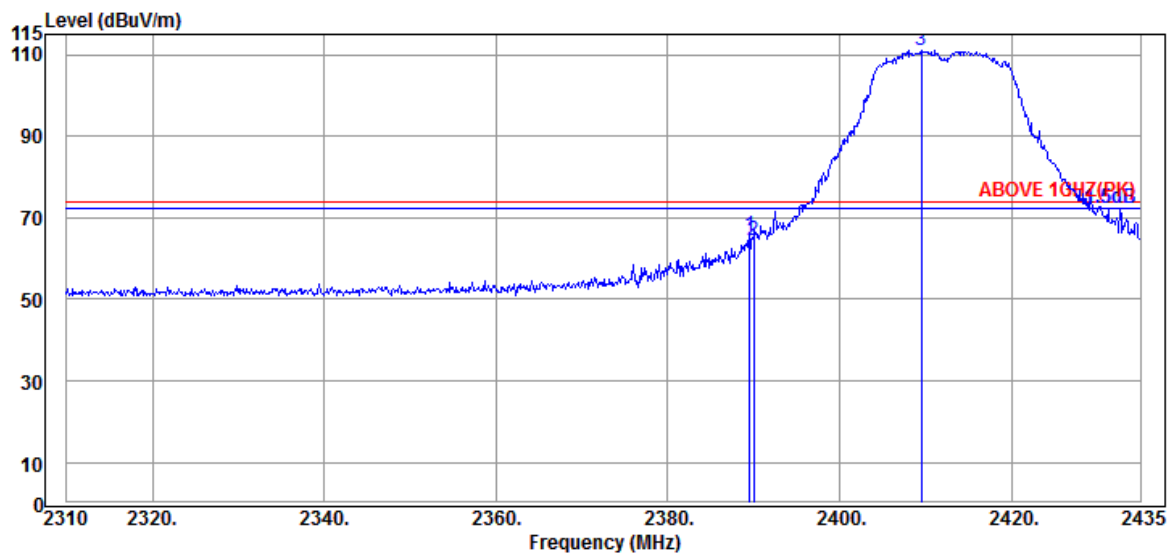

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	62.09	65.49	74.00	8.51	Peak
2390.000	31.89	6.04	34.54	61.10	64.49	74.00	9.51	Peak
@ 2409.500	31.87	6.07	34.54	107.52	110.92	---	---	Peak

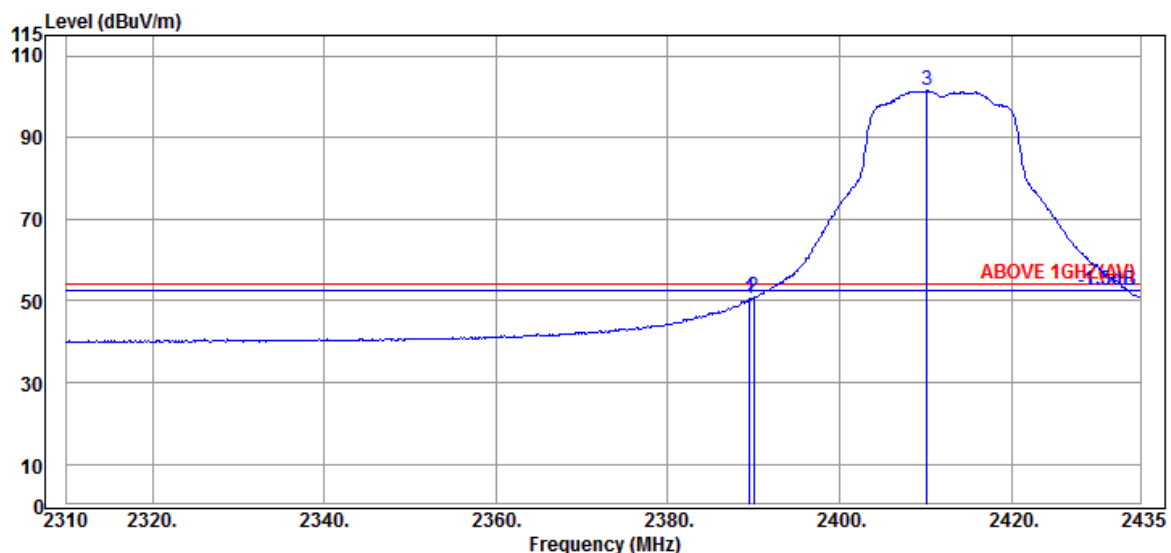


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	47.03	50.43	54.00	3.57	Average
2390.000	31.89	6.04	34.54	47.42	50.81	54.00	3.19	Average
@ 2410.125	31.87	6.07	34.54	97.98	101.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

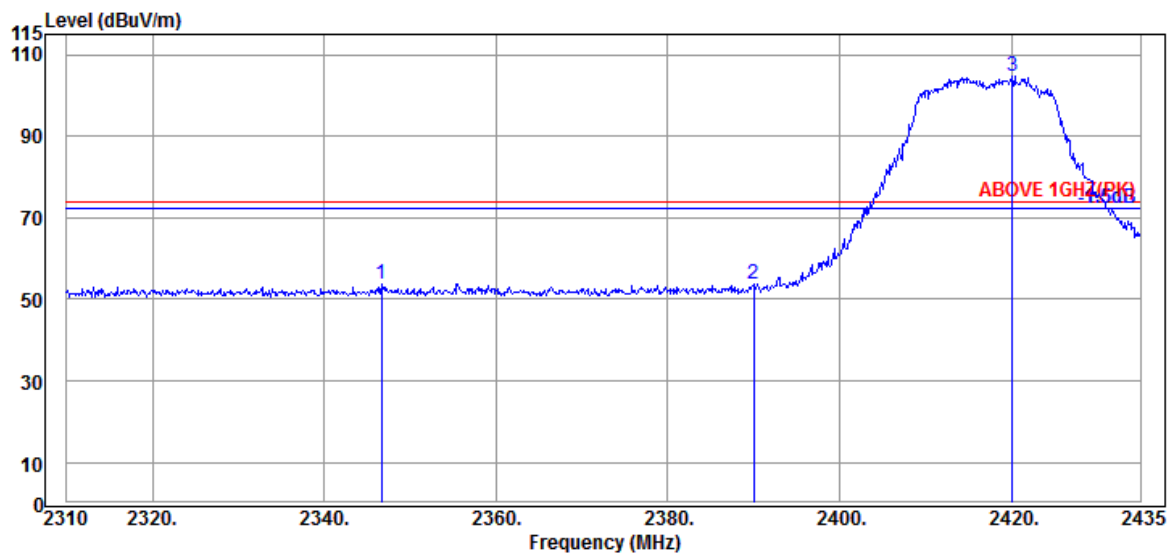

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2346.625	32.07	5.96	34.53	50.33	53.83	74.00	20.17	Peak
2390.000	31.89	6.04	34.54	50.44	53.83	74.00	20.17	Peak
@ 2420.125	32.01	6.10	34.54	101.34	104.91	---	---	Peak

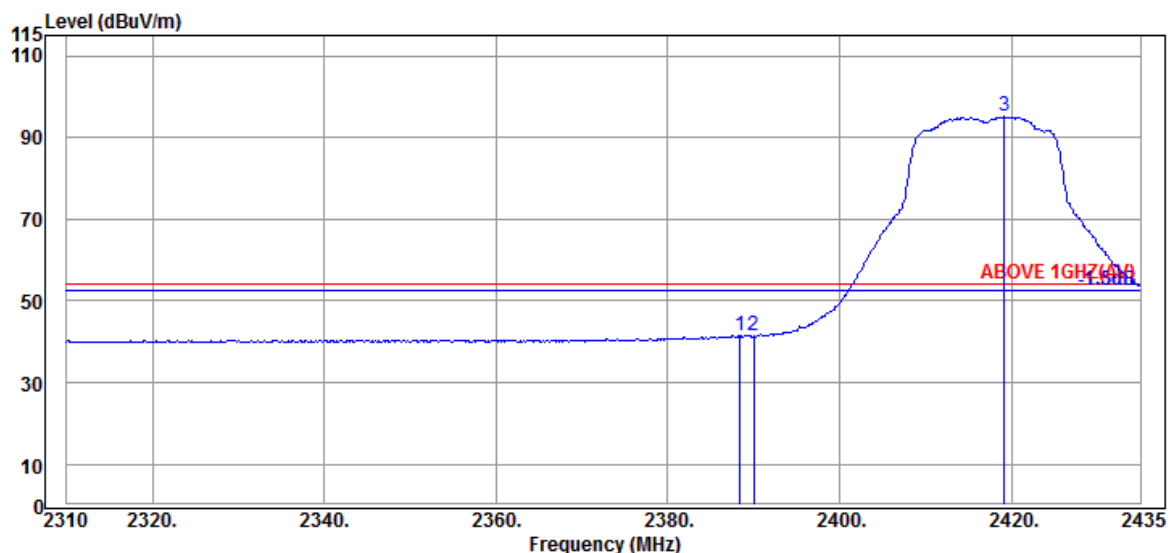

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.375	31.89	6.04	34.53	38.18	41.58	54.00	12.42	Average
2390.000	31.89	6.04	34.54	37.98	41.37	54.00	12.63	Average
@ 2419.125	32.01	6.07	34.54	91.54	95.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

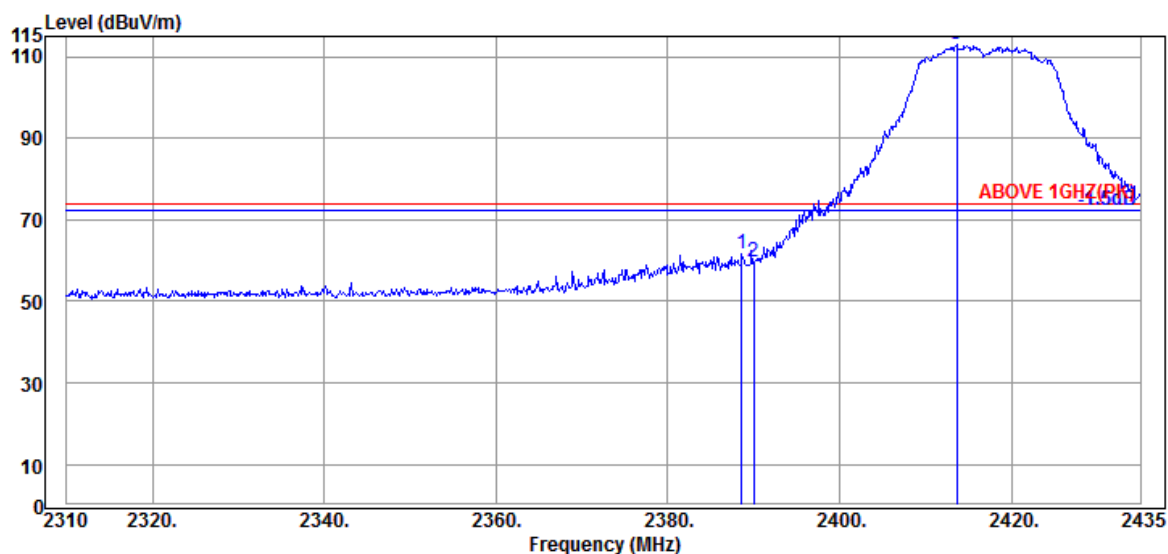

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.625	31.89	6.04	34.53	58.26	61.66	74.00	12.34	Peak
2390.000	31.89	6.04	34.54	56.20	59.59	74.00	14.41	Peak
@ 2413.625	31.94	6.07	34.54	109.44	112.91	---	---	Peak

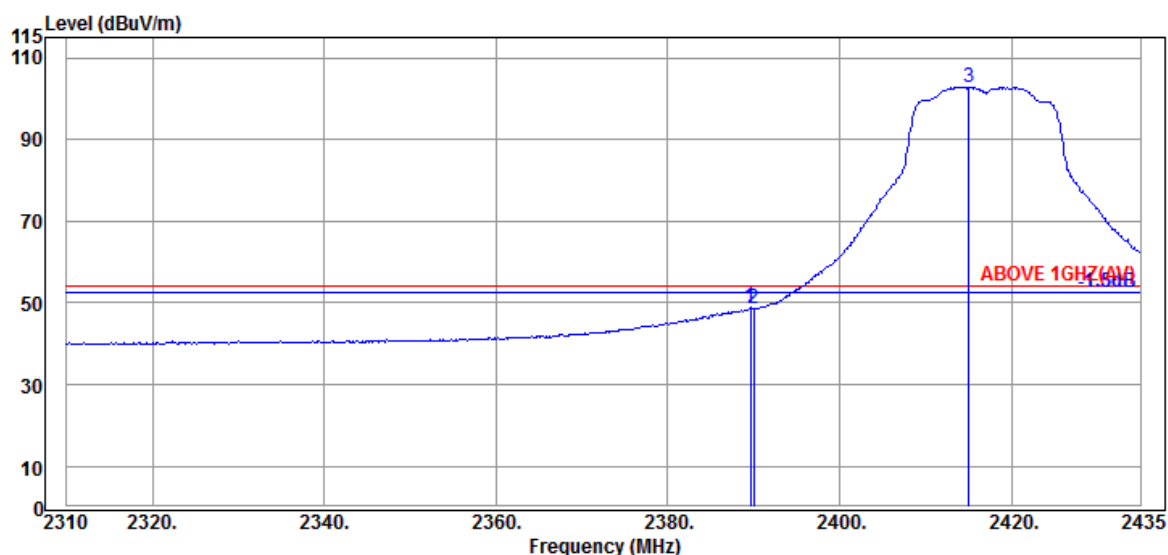

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	45.47	48.87	54.00	5.13	Average
2390.000	31.89	6.04	34.54	45.34	48.73	54.00	5.27	Average
@ 2415.000	31.94	6.07	34.54	99.32	102.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

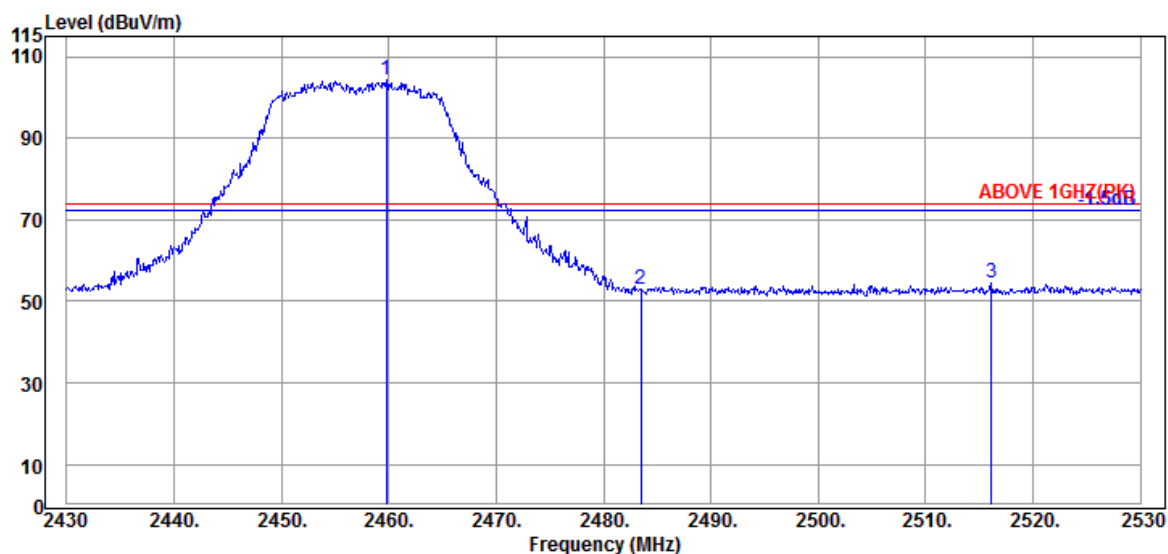

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.800	32.30	6.15	34.55	100.46	104.36	---	---	Peak
2483.500	32.30	6.18	34.55	49.05	52.98	74.00	21.02	Peak
2516.100	32.36	6.23	34.56	50.31	54.34	74.00	19.66	Peak

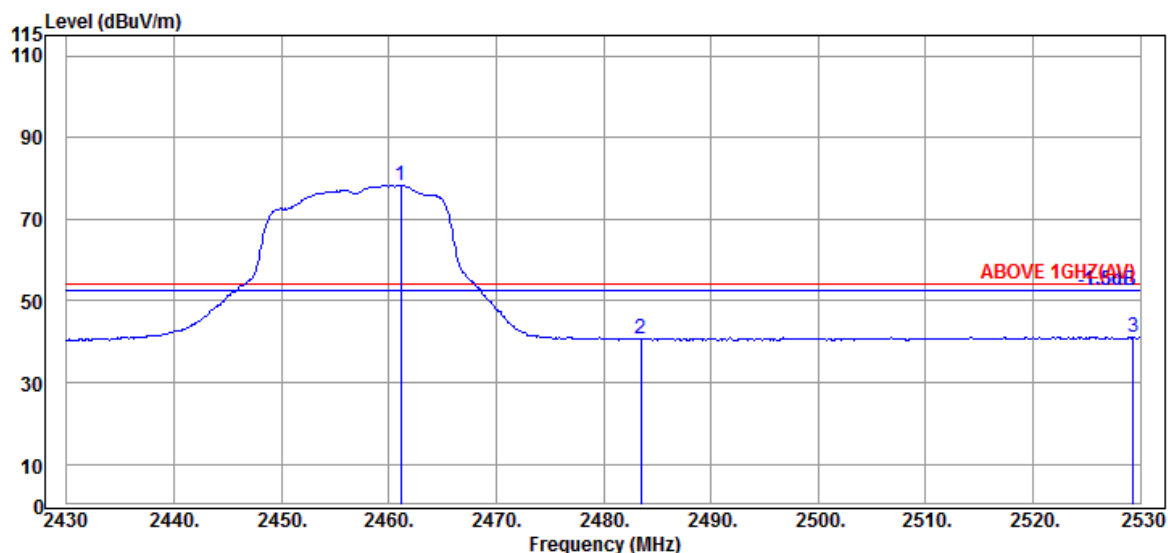

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.100	32.30	6.15	34.55	74.39	78.29	---	---	Average
2483.500	32.30	6.18	34.55	36.76	40.69	54.00	13.31	Average
2529.300	32.41	6.25	34.57	36.97	41.06	54.00	12.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

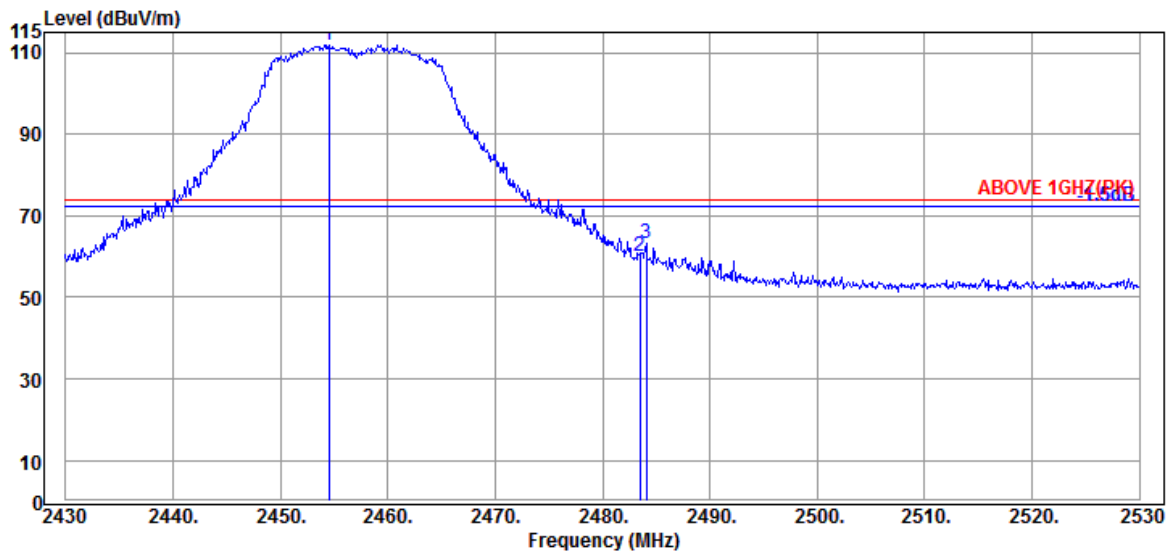

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	6.15	34.55	107.97	111.87	---	---	Peak
2483.500	32.30	6.18	34.55	56.23	60.16	74.00	13.84	Peak
2484.100	32.30	6.18	34.55	59.15	63.08	74.00	10.92	Peak

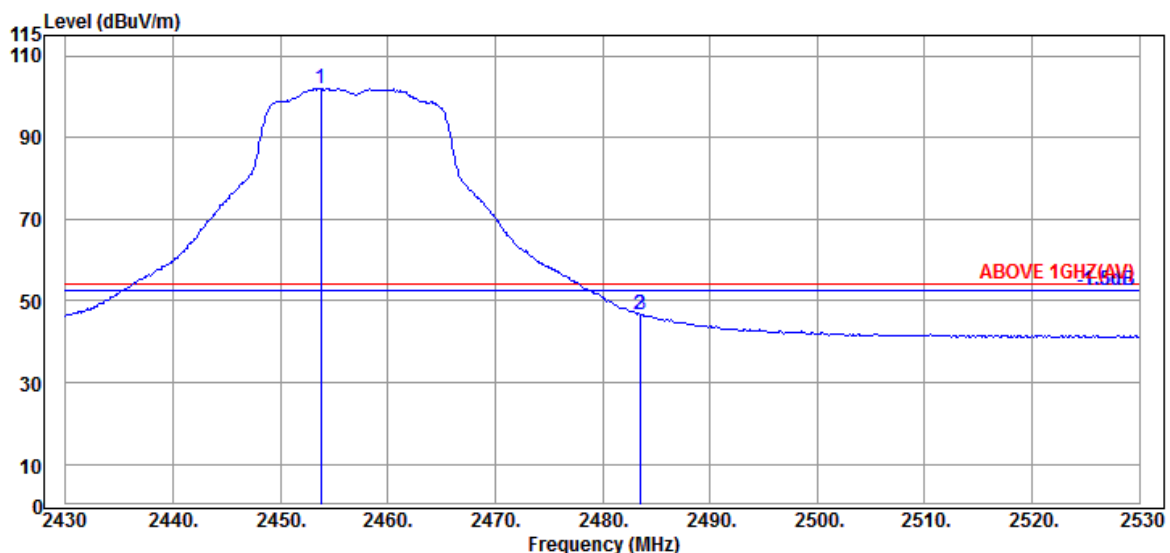


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.800	32.30	6.15	34.55	98.08	101.98	---	---	Average
2483.500	32.30	6.18	34.55	42.76	46.69	54.00	7.31	Average
2483.600	32.30	6.18	34.55	42.72	46.65	54.00	7.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

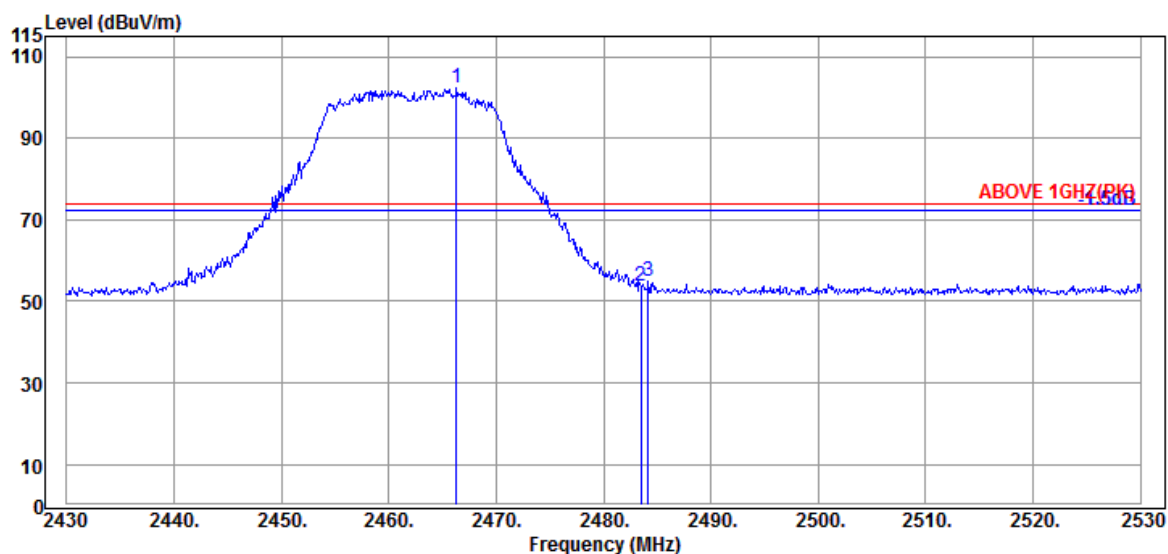

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	32.30	6.15	34.55	98.33	102.23	---	---	Peak
2483.500	32.30	6.18	34.55	49.64	53.57	74.00	20.43	Peak
2484.200	32.30	6.18	34.55	50.83	54.76	74.00	19.24	Peak

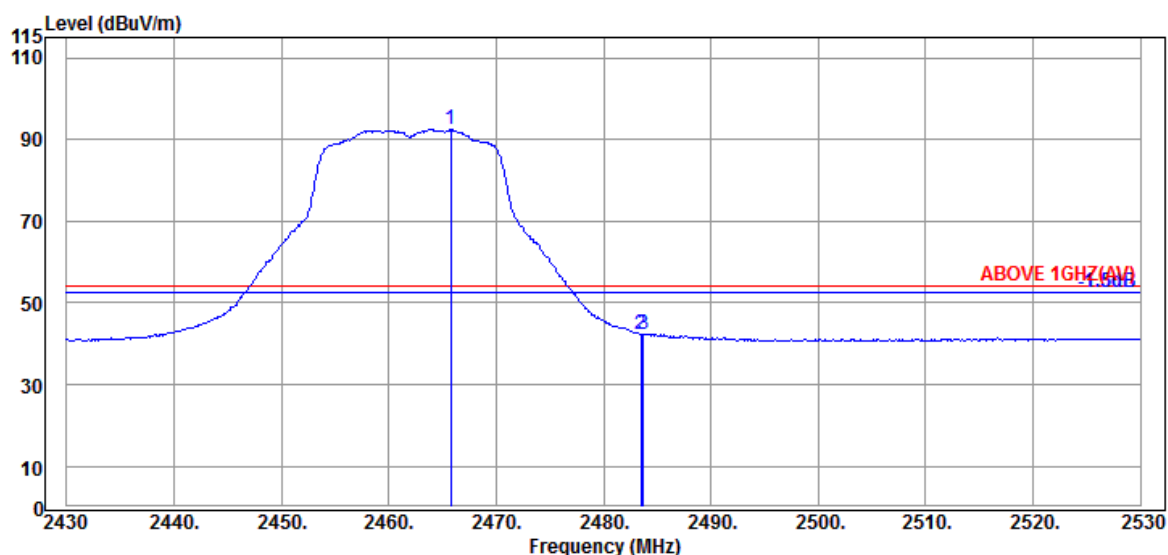

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	32.30	6.15	34.55	88.71	92.61	---	---	Average
2483.500	32.30	6.18	34.55	38.37	42.30	54.00	11.70	Average
2483.700	32.30	6.18	34.55	38.52	42.45	54.00	11.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

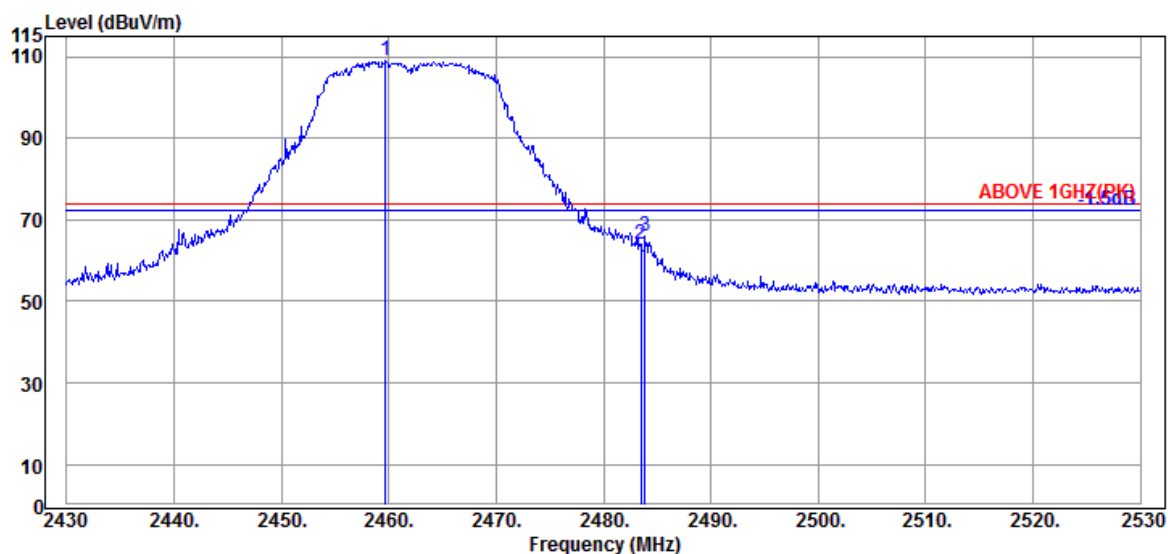

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	32.30	6.15	34.55	105.07	108.97	---	---	Peak
2483.500	32.30	6.18	34.55	59.96	63.89	74.00	10.11	Peak
2483.900	32.30	6.18	34.55	62.11	66.04	74.00	7.96	Peak

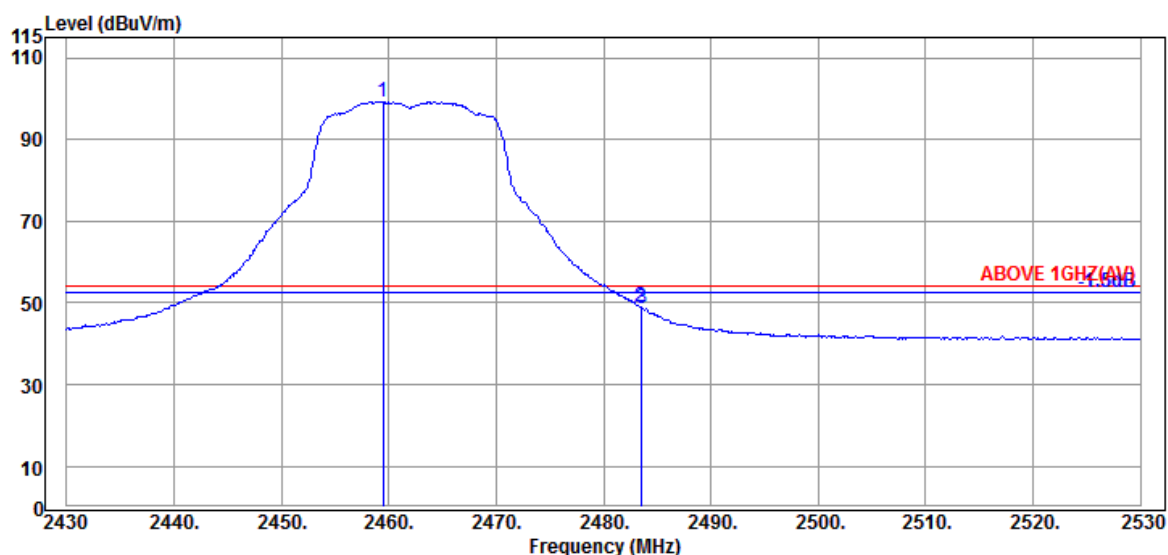


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.30	6.15	34.55	95.43	99.33	---	---	Average
2483.500	32.30	6.18	34.55	45.04	48.97	54.00	5.03	Average
2483.600	32.30	6.18	34.55	44.75	48.68	54.00	5.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

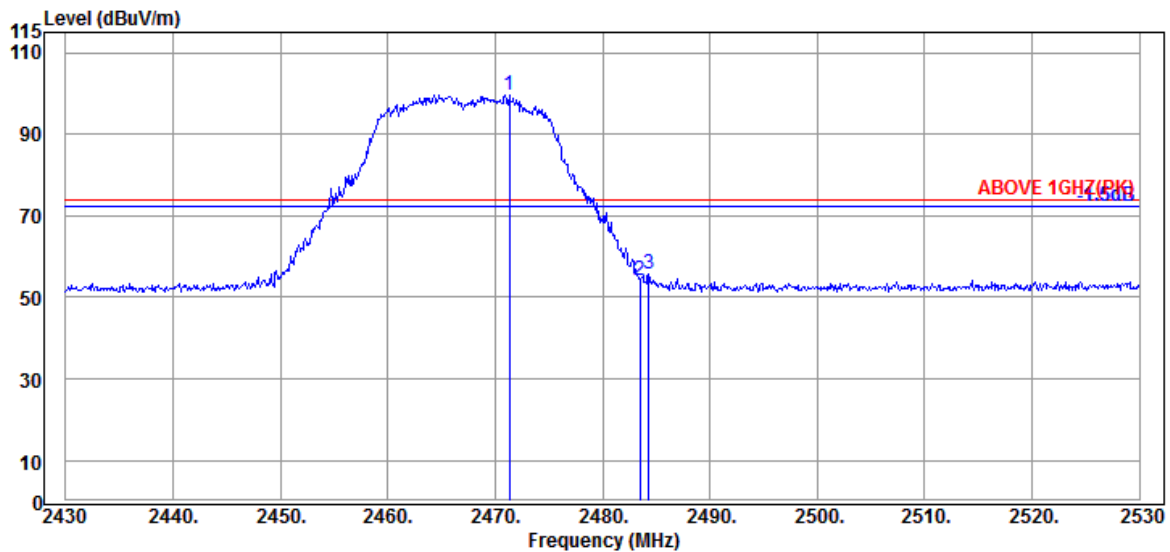

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.300	32.30	6.18	34.55	95.81	99.74	---	---	Peak
2483.500	32.30	6.18	34.55	50.19	54.12	74.00	19.88	Peak
2484.300	32.30	6.18	34.55	51.64	55.57	74.00	18.43	Peak

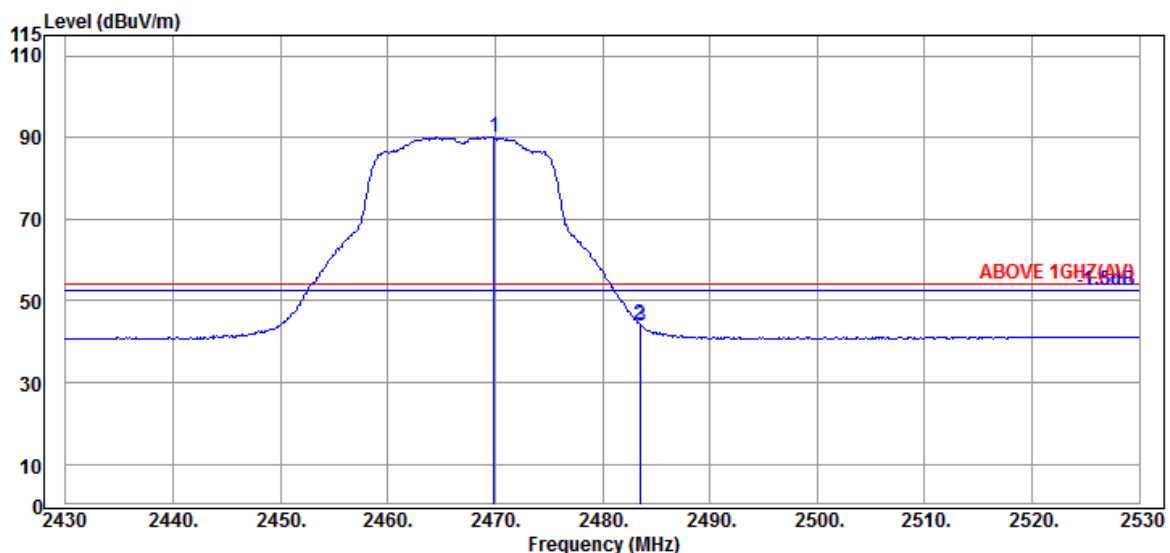

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.900	32.30	6.15	34.55	86.28	90.18	---	---	Average
2483.500	32.30	6.18	34.55	40.46	44.39	54.00	9.61	Average
2483.600	32.30	6.18	34.55	40.06	43.99	54.00	10.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

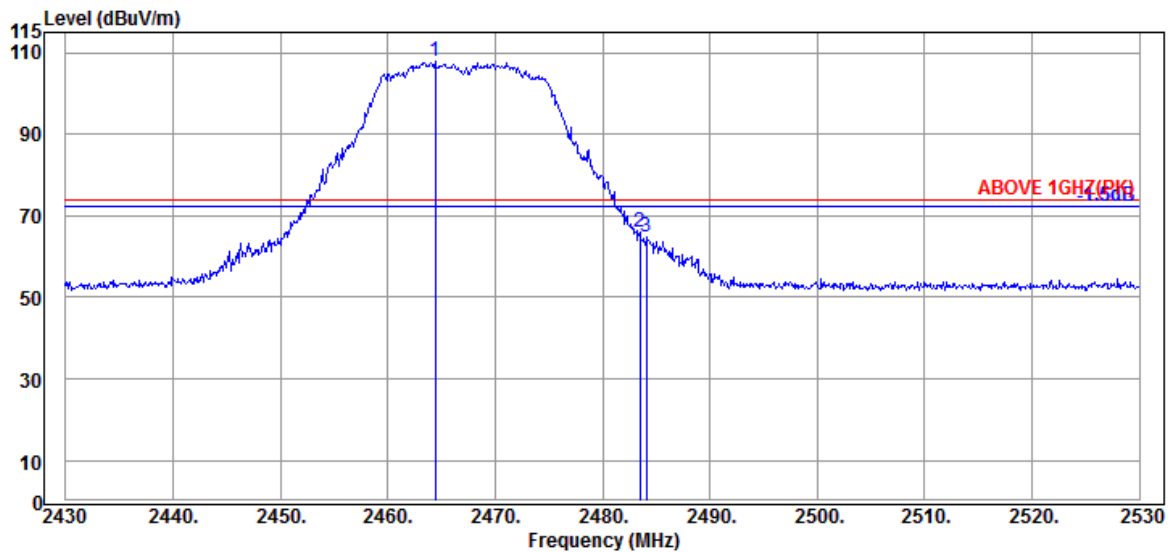

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	32.30	6.15	34.55	103.84	107.74	---	---	Peak
2483.500	32.30	6.18	34.55	61.95	65.88	74.00	8.12	Peak
2484.100	32.30	6.18	34.55	60.75	64.68	74.00	9.32	Peak

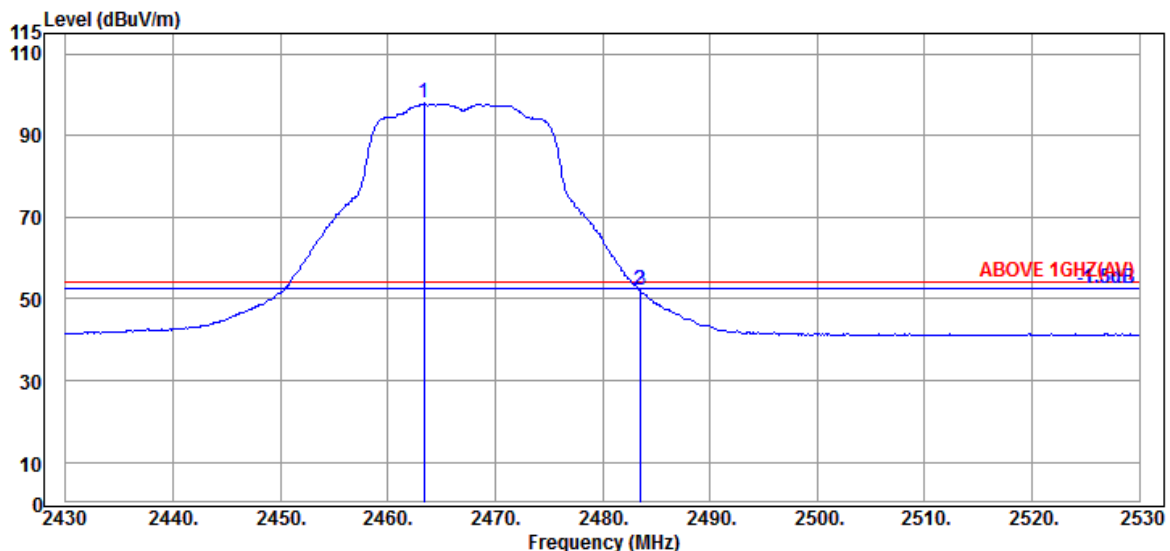

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	32.30	6.15	34.55	94.01	97.91	---	---	Average
2483.500	32.30	6.18	34.55	48.23	52.16	54.00	1.84	Average
2483.600	32.30	6.18	34.55	48.06	51.99	54.00	2.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

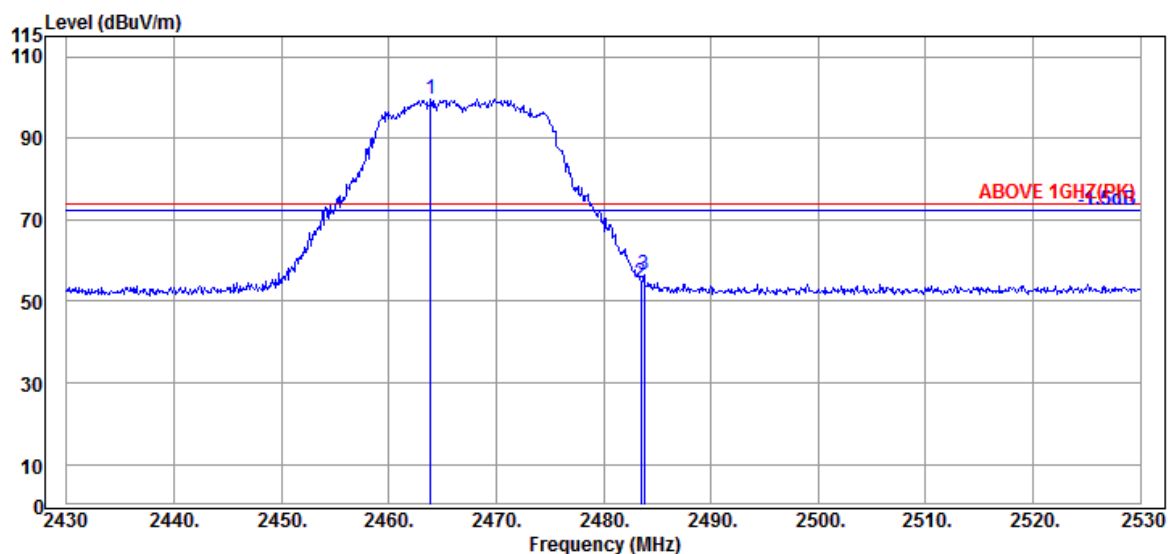

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	32.30	6.15	34.55	95.57	99.47	---	---	Peak
2483.500	32.30	6.18	34.55	50.47	54.40	74.00	19.60	Peak
2483.800	32.30	6.18	34.55	52.42	56.35	74.00	17.65	Peak

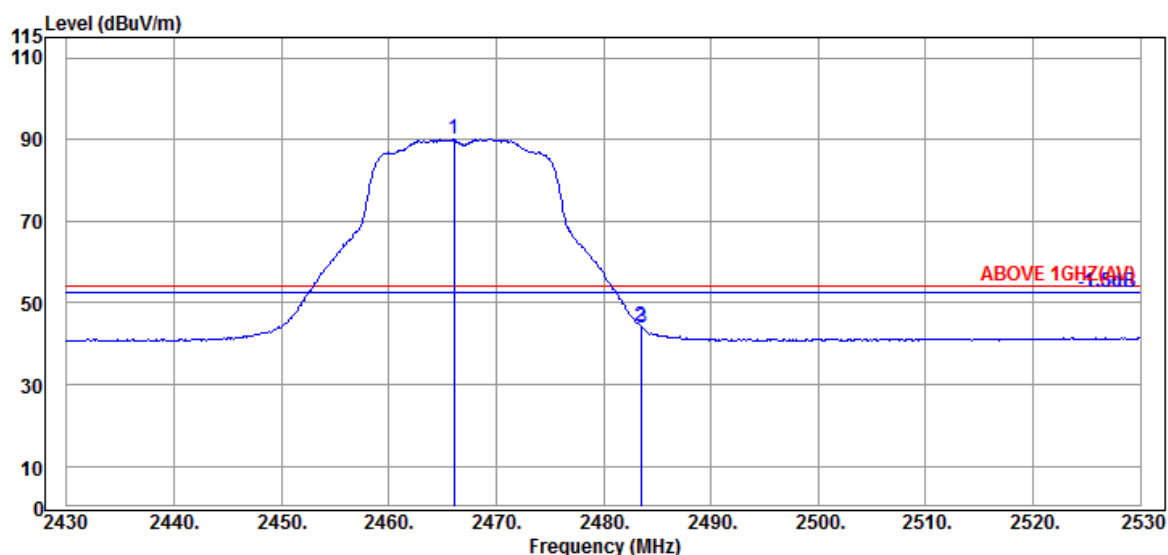

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	32.30	6.15	34.55	86.19	90.09	---	---	Average
2483.500	32.30	6.18	34.55	40.29	44.22	54.00	9.78	Average
2483.600	32.30	6.18	34.55	40.04	43.97	54.00	10.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

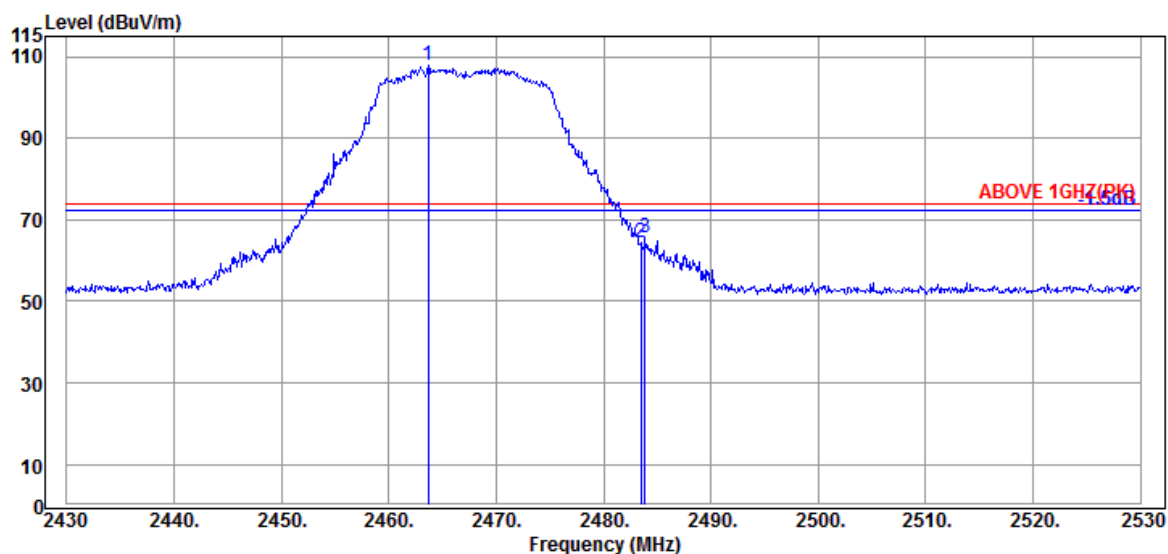

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.700	32.30	6.15	34.55	103.83	107.73	---	---	Peak
2483.500	32.30	6.18	34.55	60.59	64.52	74.00	9.48	Peak
2483.900	32.30	6.18	34.55	61.63	65.56	74.00	8.44	Peak

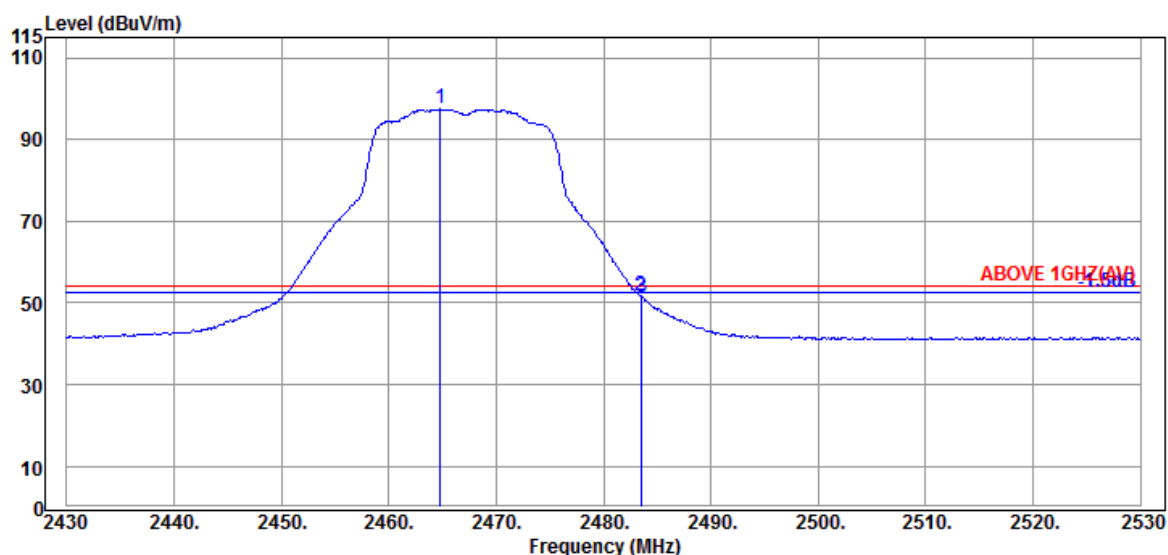

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	32.30	6.15	34.55	93.52	97.42	---	---	Average
2483.500	32.30	6.18	34.55	47.94	51.87	54.00	2.13	Average
2483.600	32.30	6.18	34.55	47.57	51.50	54.00	2.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

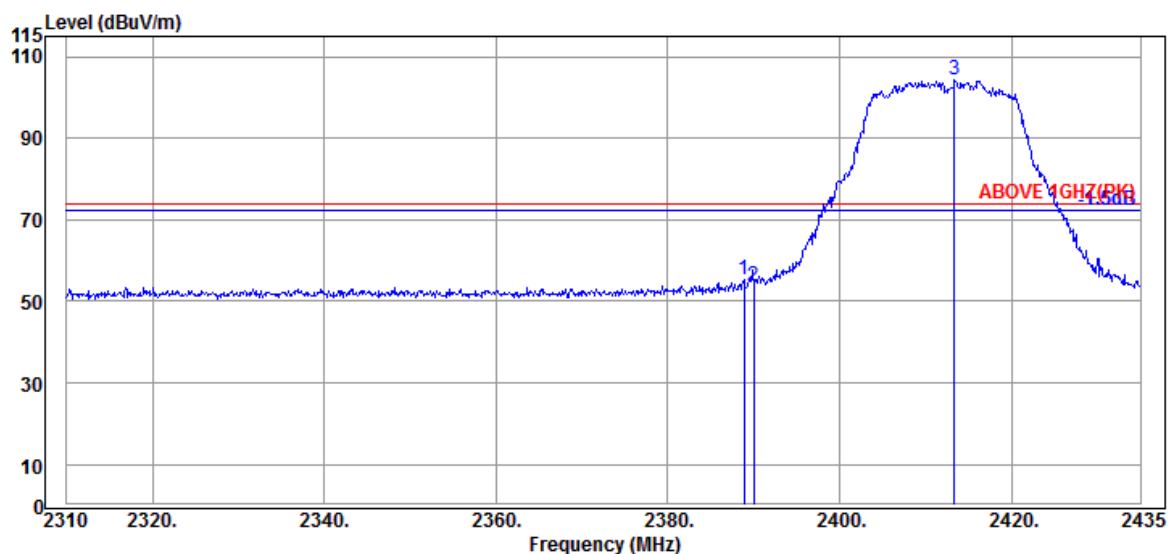

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.875	31.89	6.04	34.53	51.90	55.30	74.00	18.70	Peak
2390.000	31.89	6.04	34.54	50.42	53.81	74.00	20.19	Peak
@ 2413.375	31.94	6.07	34.54	100.97	104.44	---	---	Peak

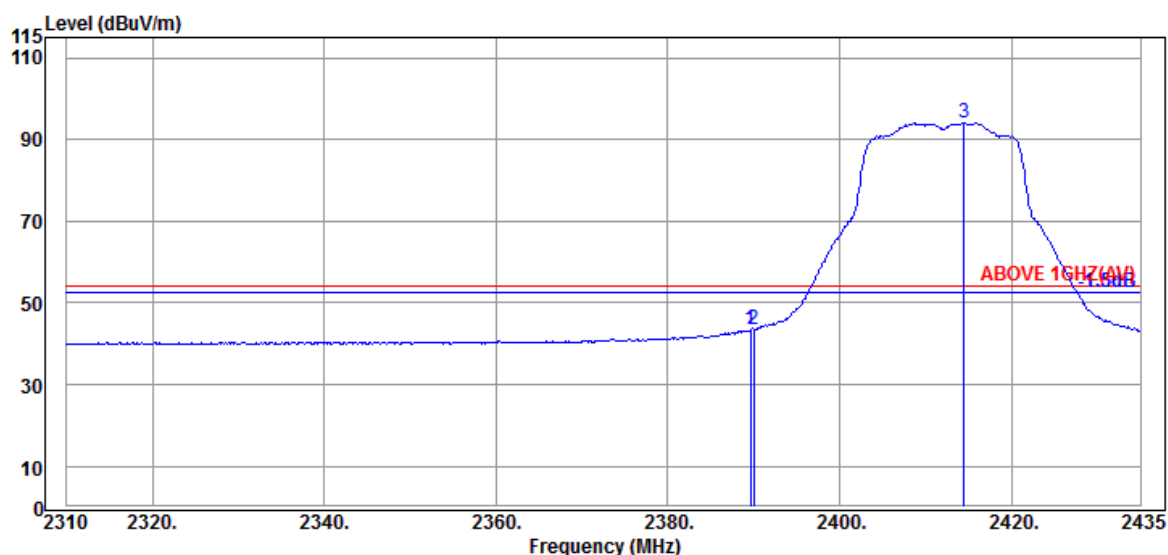

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	40.16	43.56	54.00	10.44	Average
2390.000	31.89	6.04	34.54	40.14	43.53	54.00	10.47	Average
@ 2414.500	31.94	6.07	34.54	90.67	94.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

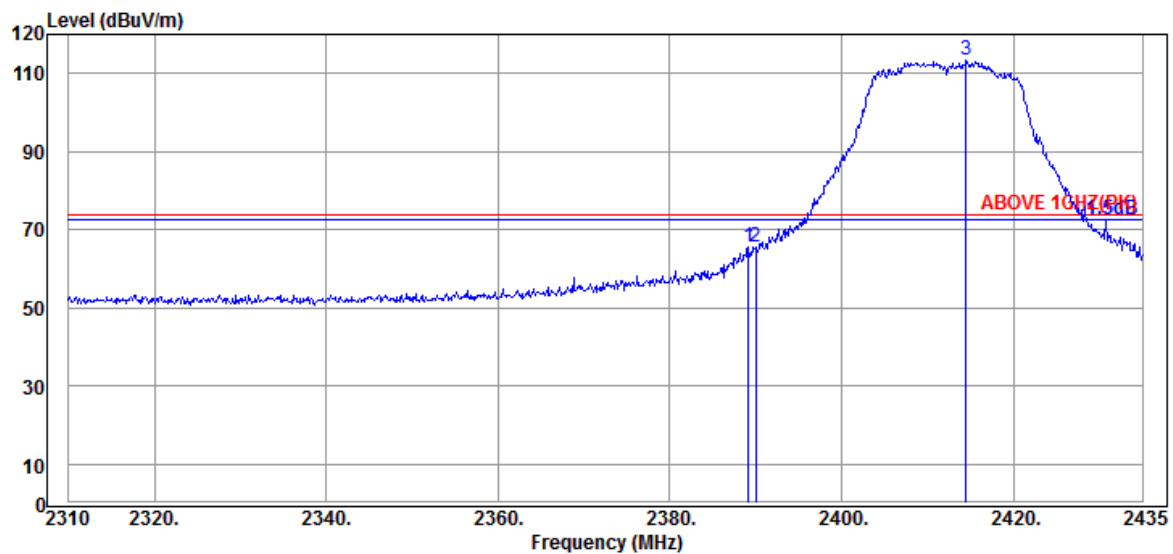

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.125	31.89	6.04	34.53	62.29	65.69	74.00	8.31	Peak
2390.000	31.89	6.04	34.54	62.38	65.77	74.00	8.23	Peak
@ 2414.500	31.94	6.07	34.54	110.12	113.59	---	---	Peak

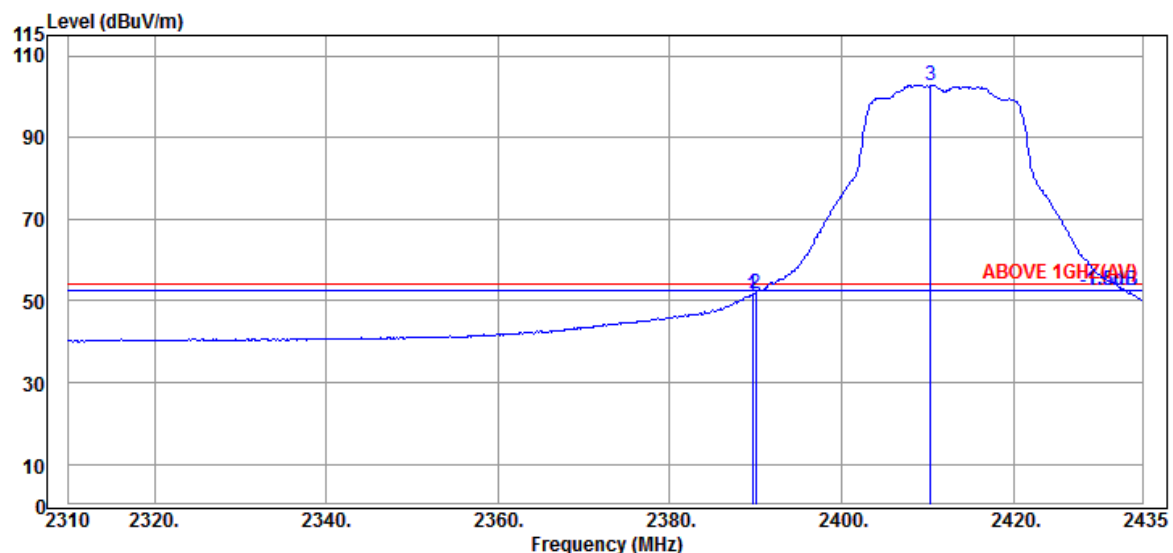


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	48.06	51.46	54.00	2.54	Average
2390.000	31.89	6.04	34.54	48.44	51.83	54.00	2.17	Average
@ 2410.375	31.87	6.07	34.54	99.40	102.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

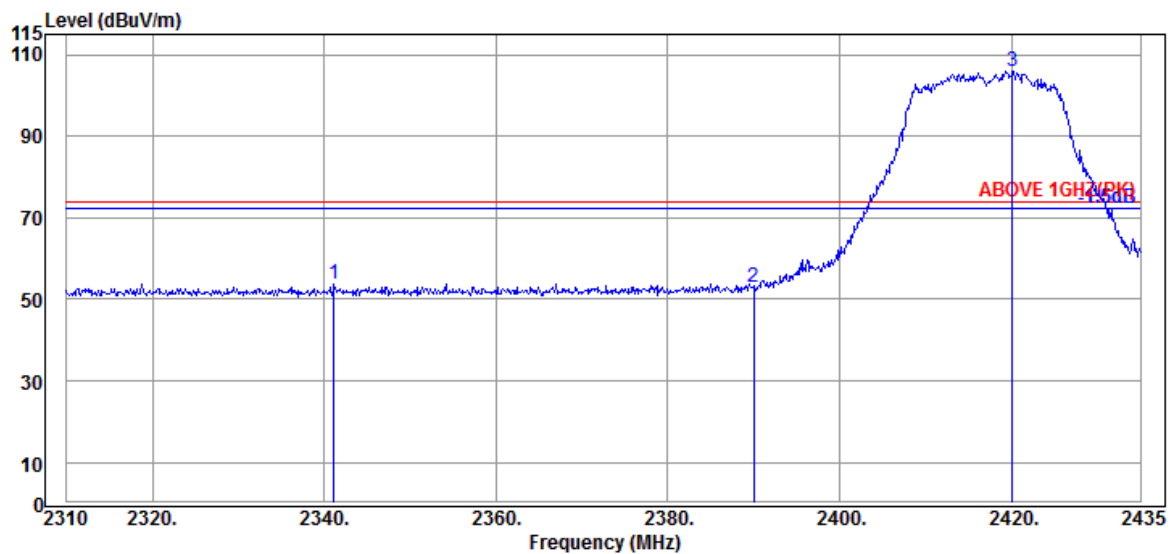

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.125	32.05	5.96	34.53	50.19	53.67	74.00	20.33	Peak
2390.000	31.89	6.04	34.54	49.45	52.84	74.00	21.16	Peak
@ 2420.125	32.01	6.10	34.54	102.25	105.82	---	---	Peak

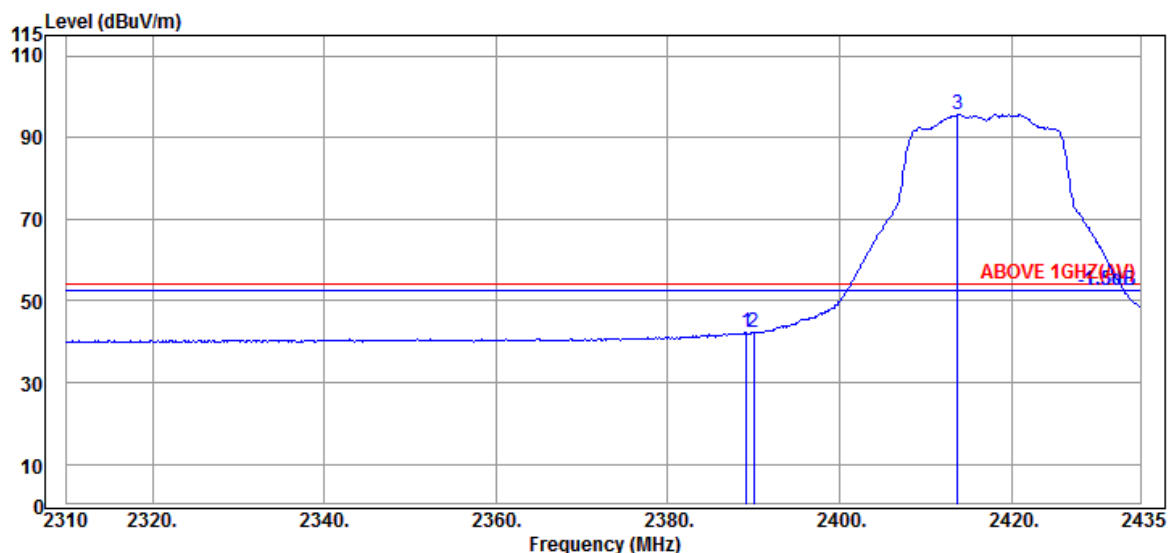

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.125	31.89	6.04	34.53	38.71	42.11	54.00	11.89	Average
2390.000	31.89	6.04	34.54	38.76	42.15	54.00	11.85	Average
@ 2413.750	31.94	6.07	34.54	92.12	95.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

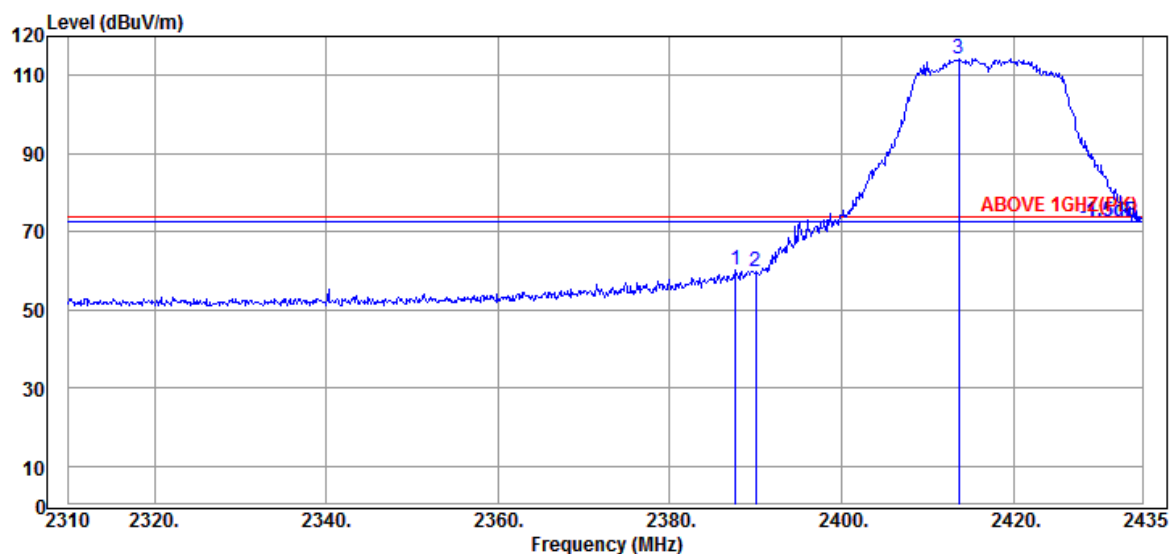

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.625	31.89	6.04	34.53	56.94	60.34	74.00	13.66	Peak
2390.000	31.89	6.04	34.54	56.59	59.98	74.00	14.02	Peak
@ 2413.625	31.94	6.07	34.54	110.86	114.33	---	---	Peak

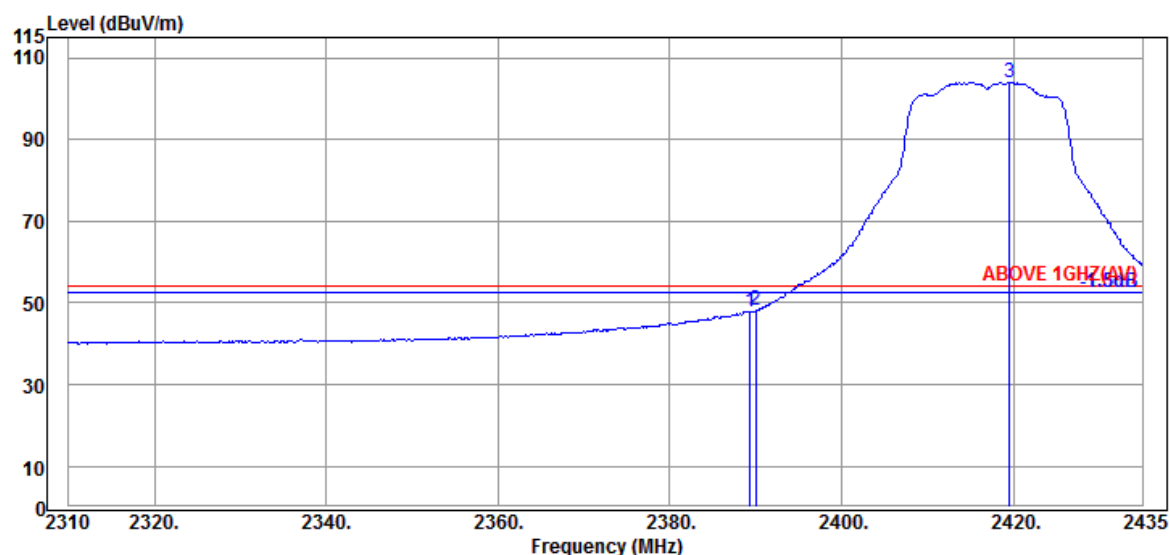

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	44.47	47.87	54.00	6.13	Average
2390.000	31.89	6.04	34.54	44.71	48.10	54.00	5.90	Average
@ 2419.500	32.01	6.10	34.54	100.34	103.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

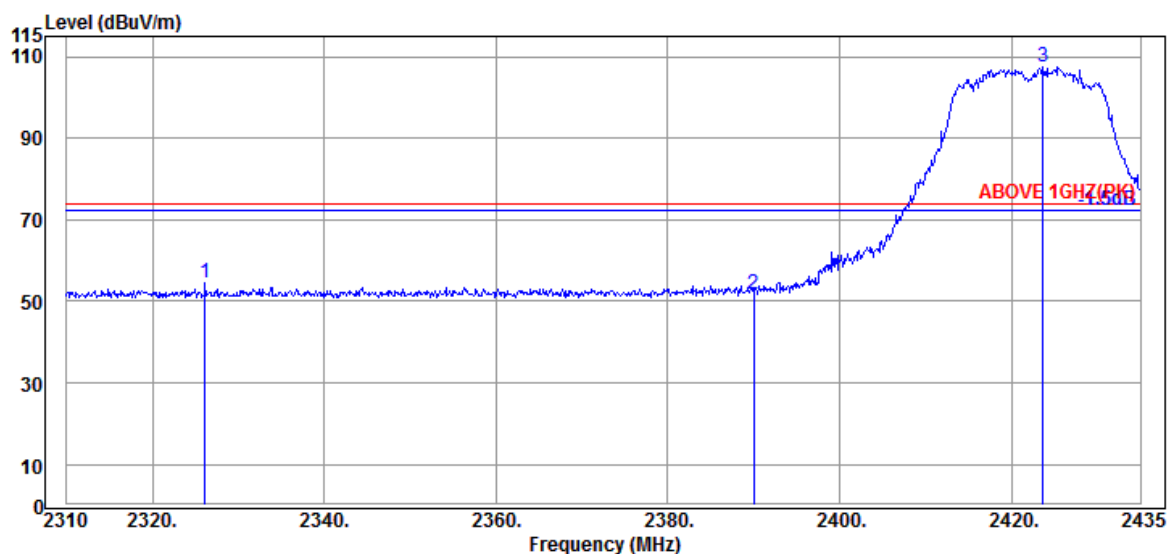

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2326.125	32.00	5.93	34.52	51.03	54.44	74.00	19.56	Peak
2390.000	31.89	6.04	34.54	48.54	51.93	74.00	22.07	Peak
@ 2423.625	32.01	6.10	34.54	103.92	107.49	---	---	Peak

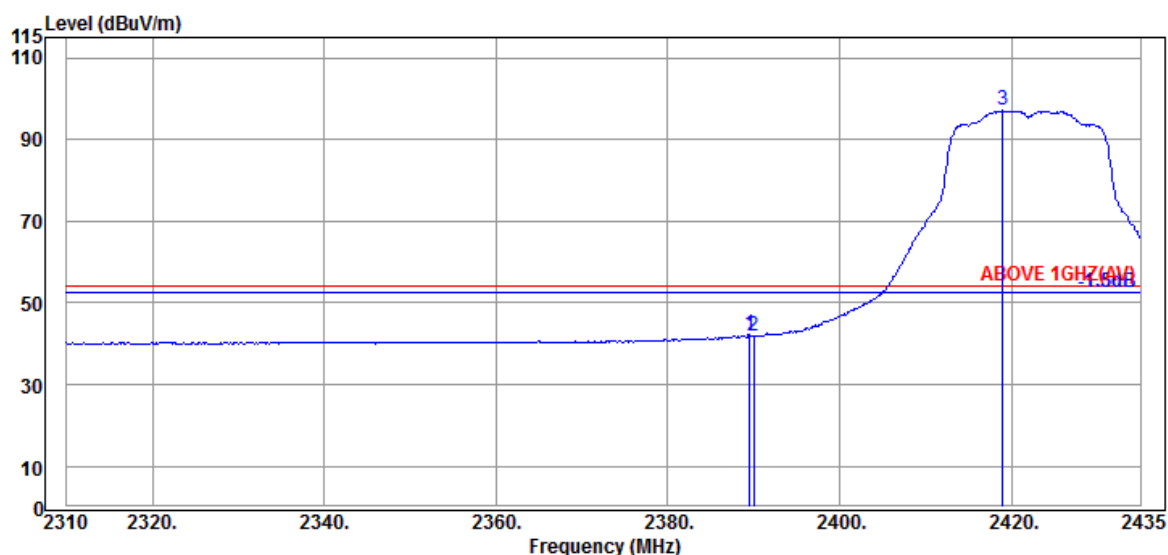

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	38.82	42.22	54.00	11.78	Average
2390.000	31.89	6.04	34.54	38.49	41.88	54.00	12.12	Average
@ 2419.000	32.01	6.07	34.54	93.49	97.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

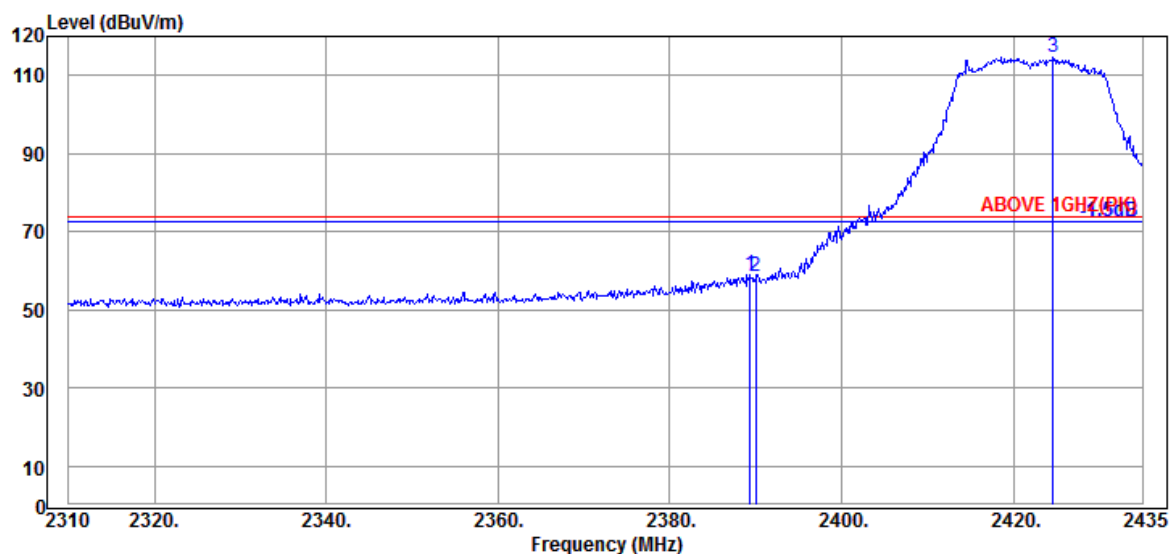

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	55.46	58.86	74.00	15.14	Peak
2390.000	31.89	6.04	34.54	55.08	58.47	74.00	15.53	Peak
@ 2424.625	32.01	6.10	34.54	111.08	114.65	---	---	Peak

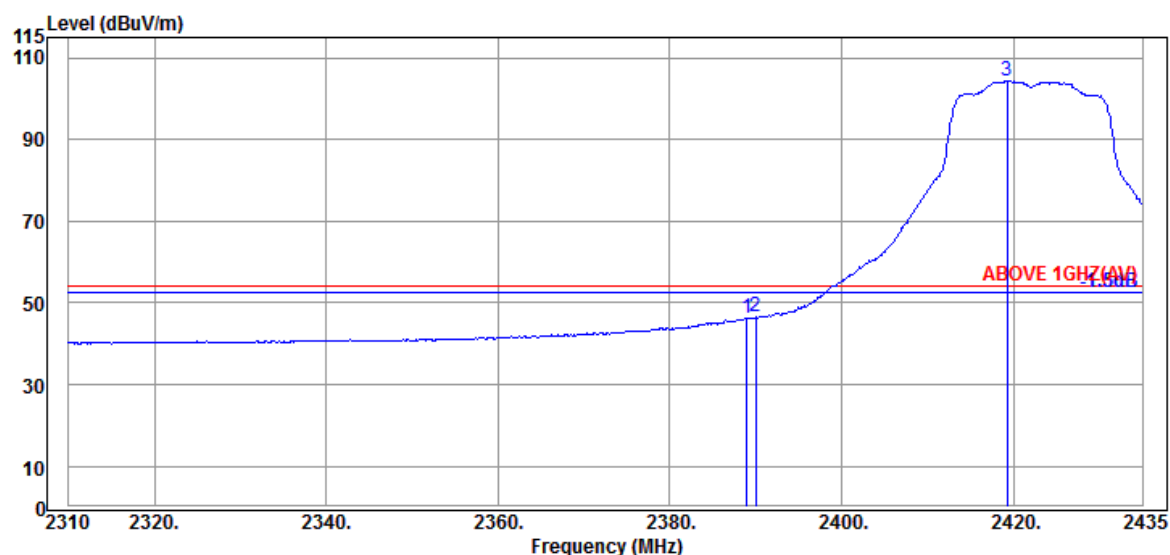

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	31.89	6.04	34.53	42.90	46.30	54.00	7.70	Average
2390.000	31.89	6.04	34.54	43.12	46.51	54.00	7.49	Average
@ 2419.250	32.01	6.07	34.54	100.81	104.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

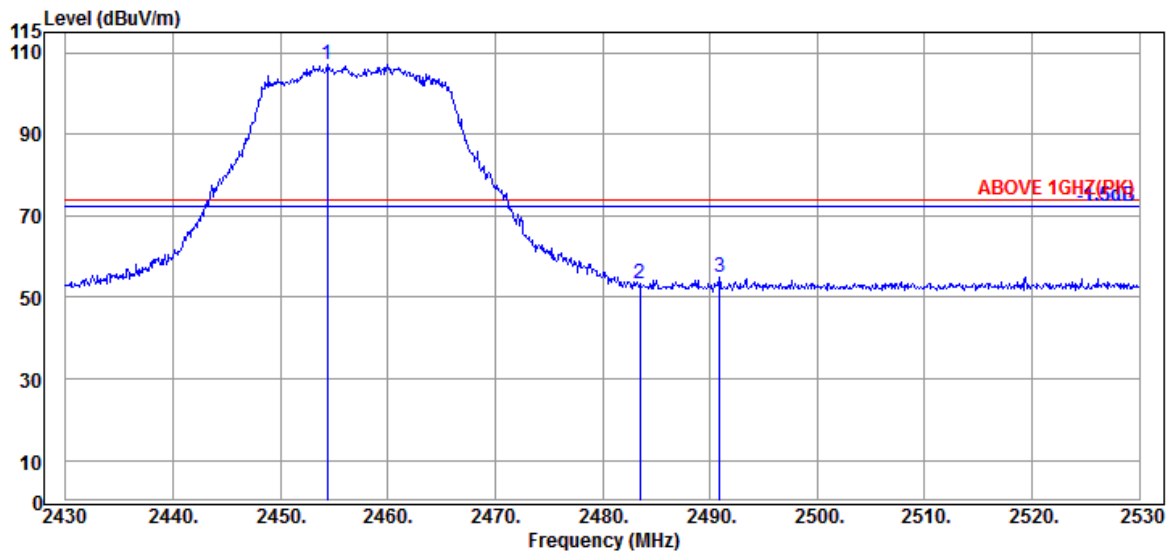

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.400	32.30	6.15	34.55	103.06	106.96	---	---	Peak
2483.500	32.30	6.18	34.55	49.52	53.45	74.00	20.55	Peak
2490.900	32.30	6.21	34.55	50.86	54.82	74.00	19.18	Peak

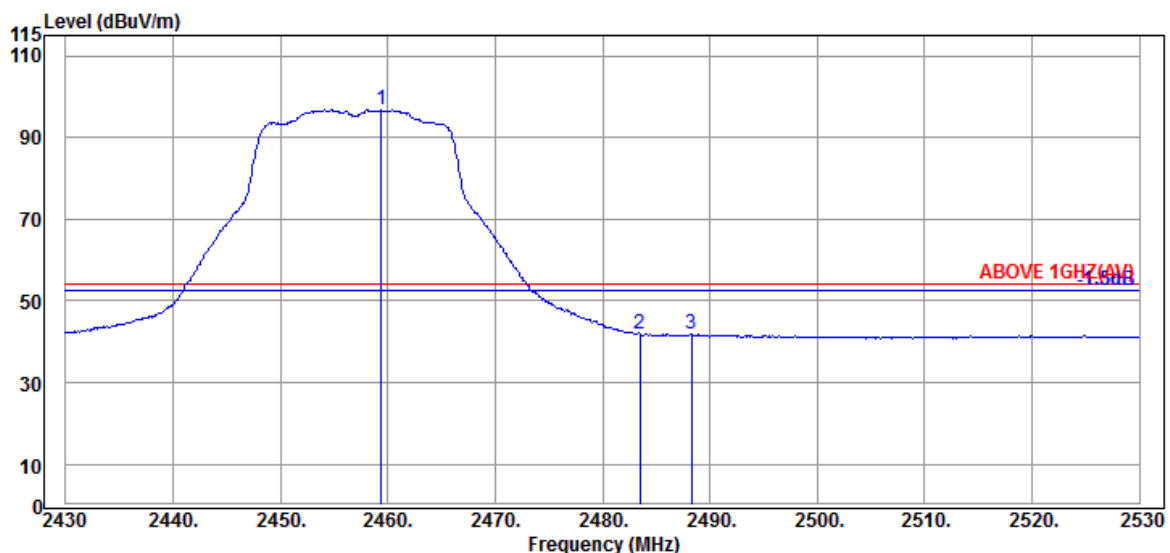


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	32.30	6.15	34.55	92.90	96.80	---	---	Average
2483.500	32.30	6.18	34.55	38.07	42.00	54.00	12.00	Average
2488.300	32.30	6.21	34.55	38.03	41.99	54.00	12.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

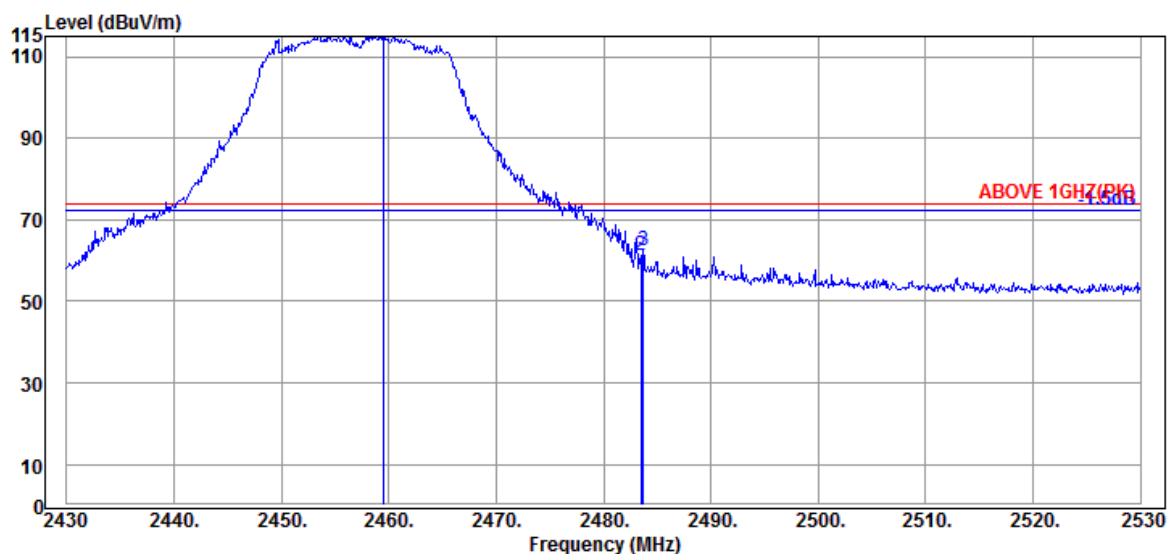

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.30	6.15	34.55	111.18	115.08	---	---	Peak
2483.500	32.30	6.18	34.55	57.32	61.25	74.00	12.75	Peak
2483.700	32.30	6.18	34.55	58.37	62.30	74.00	11.70	Peak

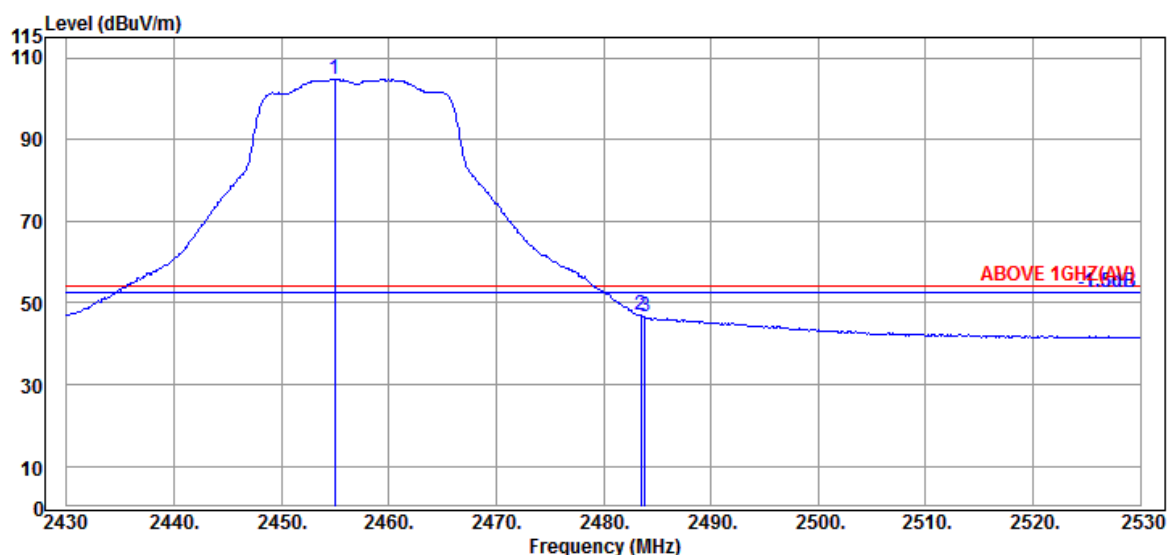

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	6.15	34.55	100.89	104.79	---	---	Average
2483.500	32.30	6.18	34.55	42.96	46.89	54.00	7.11	Average
2483.900	32.30	6.18	34.55	42.72	46.65	54.00	7.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

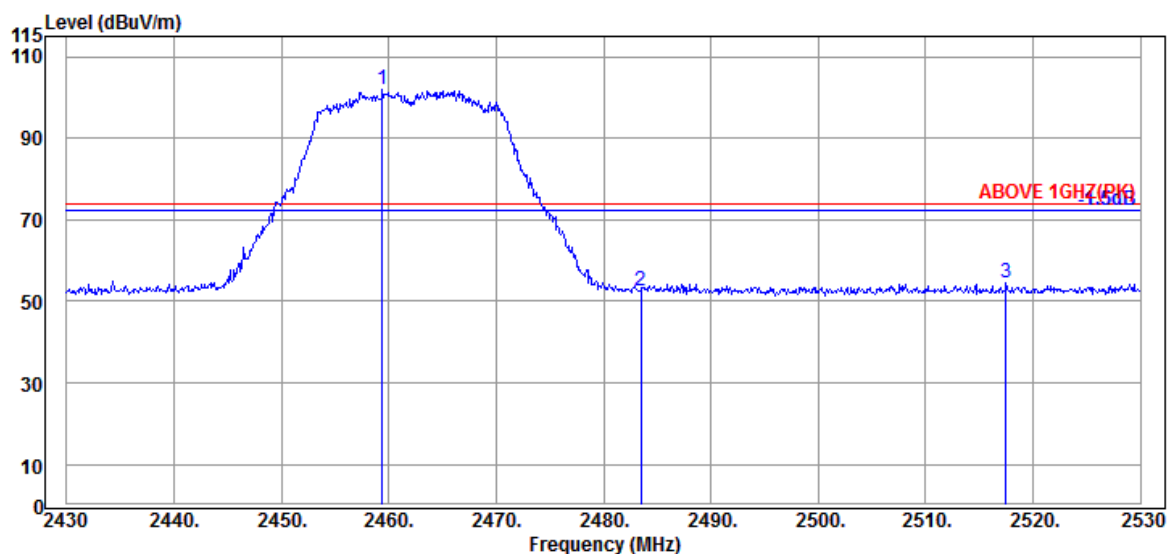

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.400	32.30	6.15	34.55	98.00	101.90	---	---	Peak
2483.500	32.30	6.18	34.55	48.70	52.63	74.00	21.37	Peak
2517.500	32.36	6.23	34.57	50.48	54.50	74.00	19.50	Peak

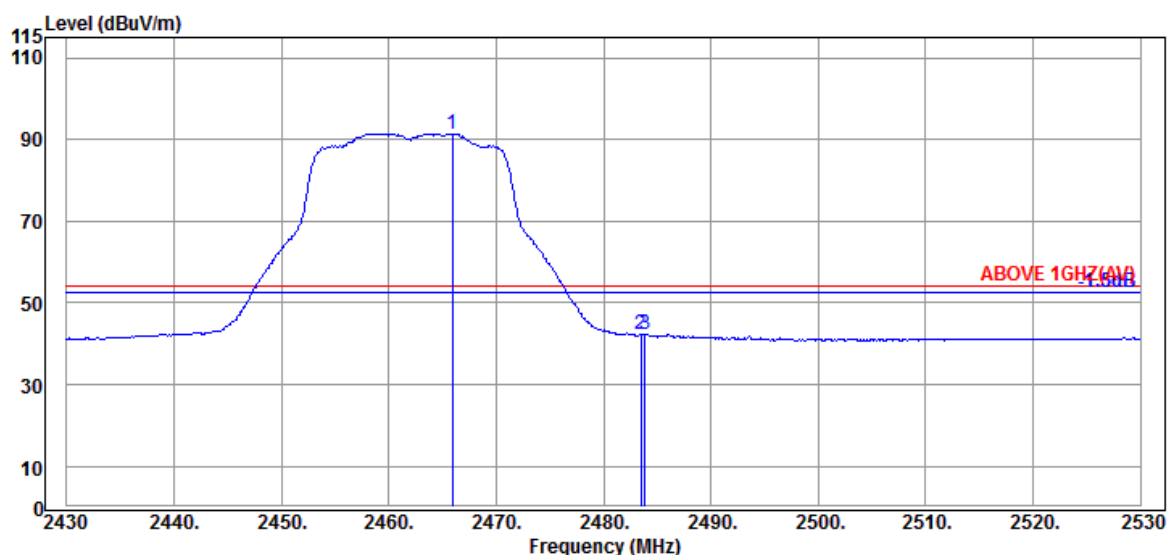

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.900	32.30	6.15	34.55	87.57	91.47	---	---	Average
2483.500	32.30	6.18	34.55	38.30	42.23	54.00	11.77	Average
2483.900	32.30	6.18	34.55	38.46	42.39	54.00	11.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

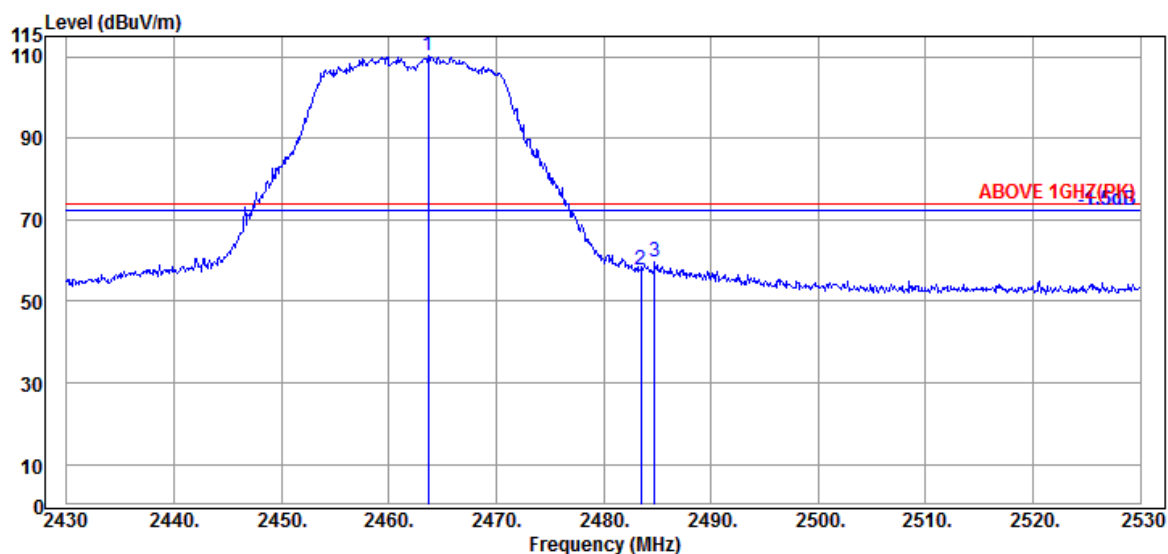

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.700	32.30	6.15	34.55	106.26	110.16	---	---	Peak
2483.500	32.30	6.18	34.55	53.68	57.61	74.00	16.39	Peak
2484.800	32.30	6.18	34.55	55.67	59.60	74.00	14.40	Peak

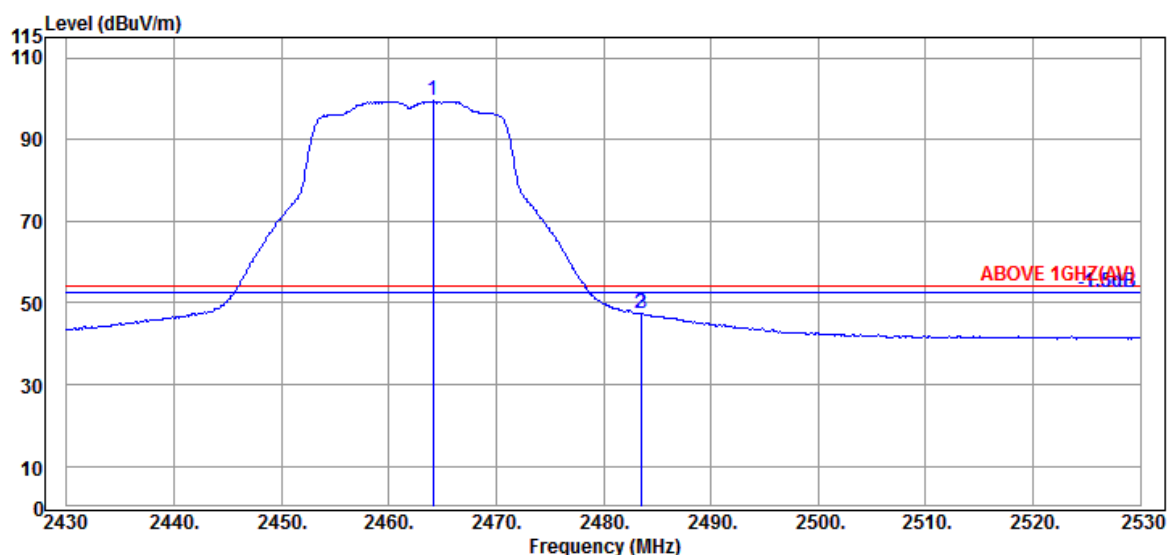

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	32.30	6.15	34.55	95.52	99.42	---	---	Average
2483.500	32.30	6.18	34.55	43.60	47.53	54.00	6.47	Average
2483.600	32.30	6.18	34.55	43.47	47.40	54.00	6.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

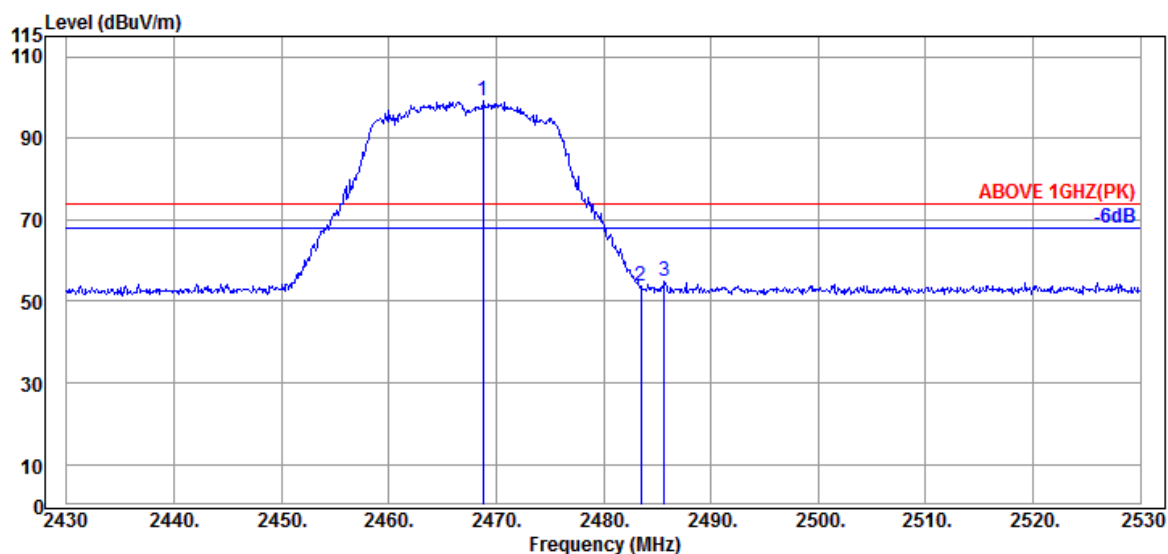

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.800	32.30	6.15	34.55	95.21	99.11	---	---	Peak
2483.500	32.30	6.18	34.55	49.96	53.89	74.00	20.11	Peak
2485.700	32.30	6.18	34.55	50.93	54.86	74.00	19.14	Peak

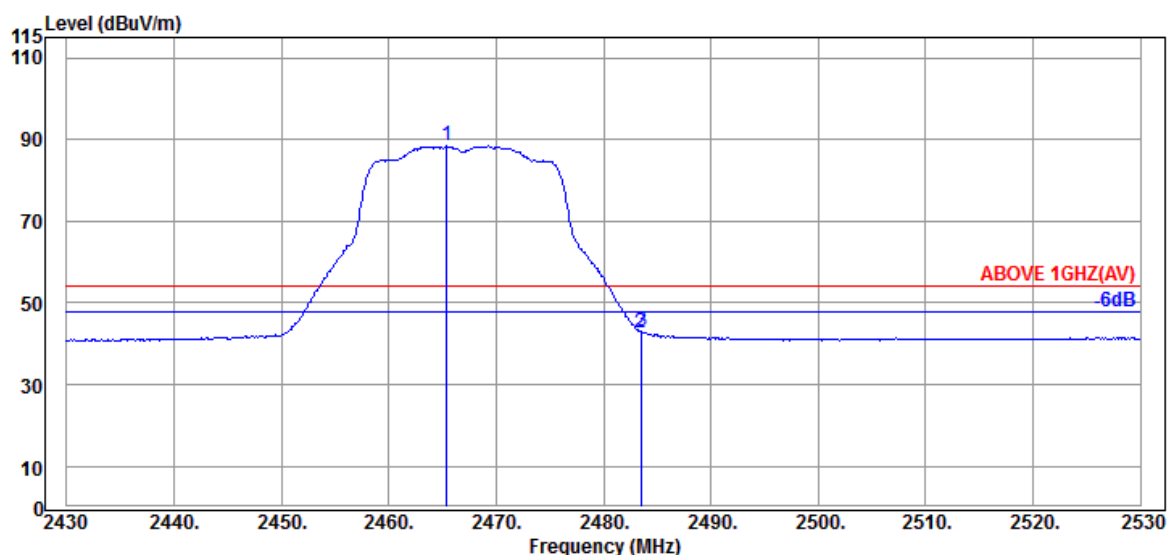

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.400	32.30	6.15	34.55	84.56	88.46	---	---	Average
2483.500	32.30	6.18	34.55	38.95	42.88	54.00	11.12	Average
2483.600	32.30	6.18	34.55	39.12	43.05	54.00	10.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

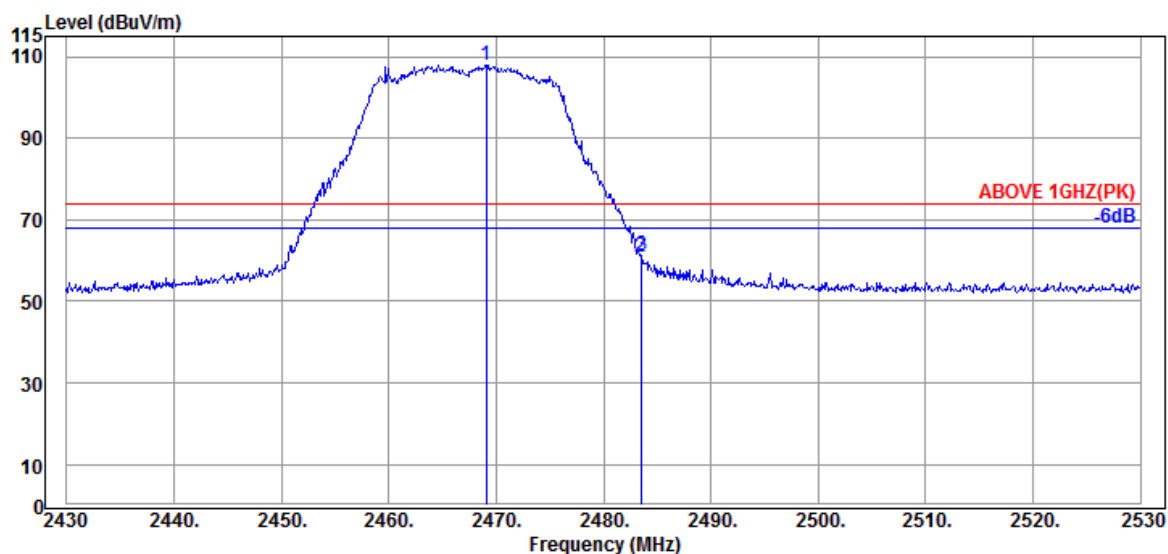

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	32.30	6.15	34.55	104.13	108.03	---	---	Peak
2483.500	32.30	6.18	34.55	56.95	60.88	74.00	13.12	Peak
2483.600	32.30	6.18	34.55	57.51	61.44	74.00	12.56	Peak

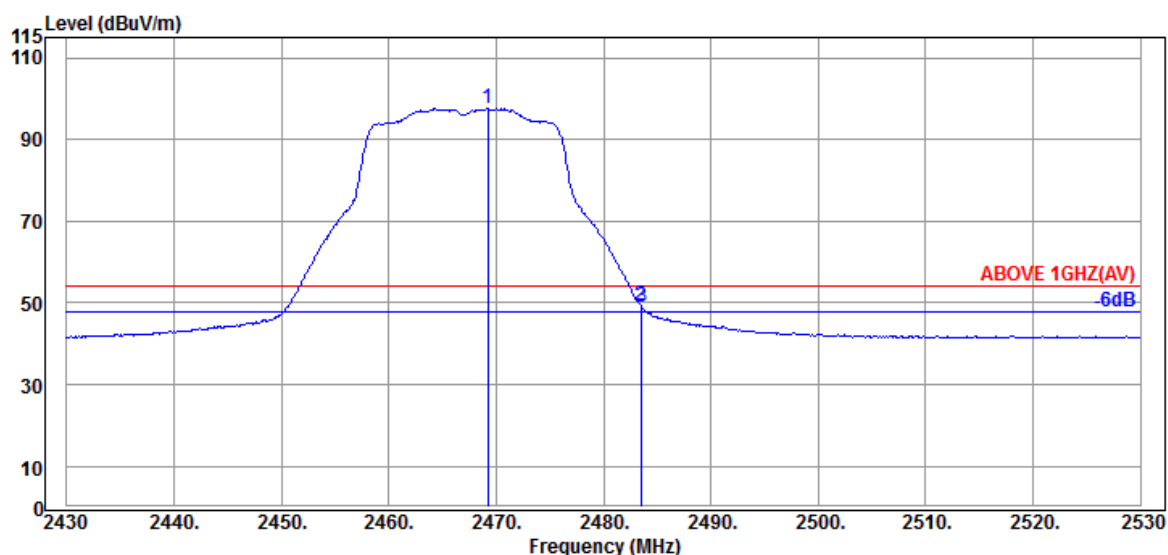

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	32.30	6.15	34.55	93.60	97.50	---	---	Average
2483.500	32.30	6.18	34.55	45.47	49.40	54.00	4.60	Average
2483.600	32.30	6.18	34.55	45.13	49.06	54.00	4.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

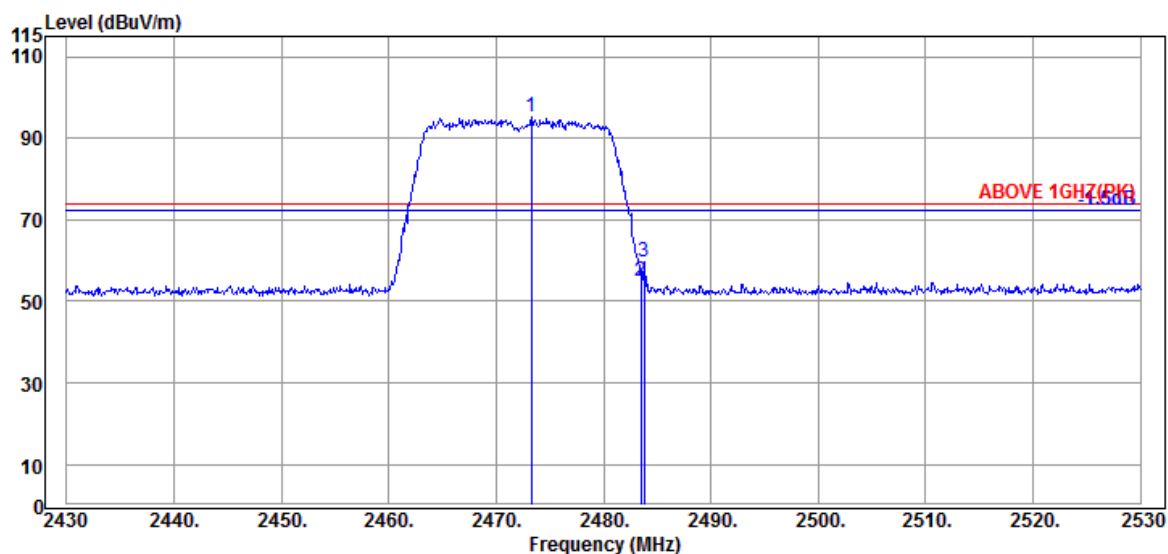

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.300	32.30	6.18	34.55	91.17	95.10	---	---	Peak
2483.500	32.30	6.18	34.55	51.13	55.06	74.00	18.94	Peak
2483.800	32.30	6.18	34.55	55.68	59.61	74.00	14.39	Peak

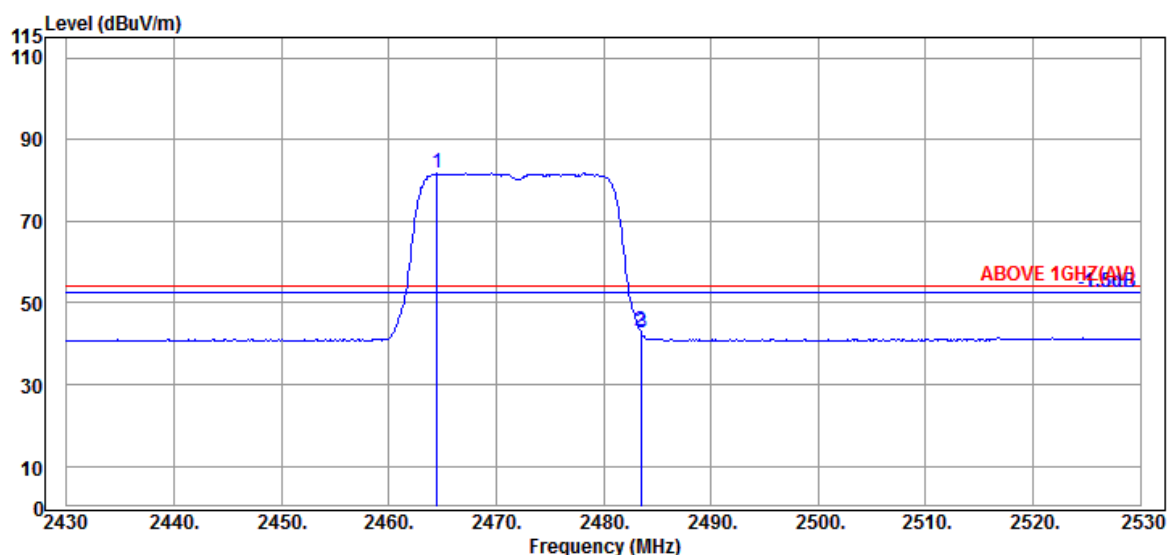

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	6.15	34.55	77.85	81.75	---	---	Average
2483.500	32.30	6.18	34.55	39.28	43.21	54.00	10.79	Average
2483.600	32.30	6.18	34.55	38.68	42.61	54.00	11.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

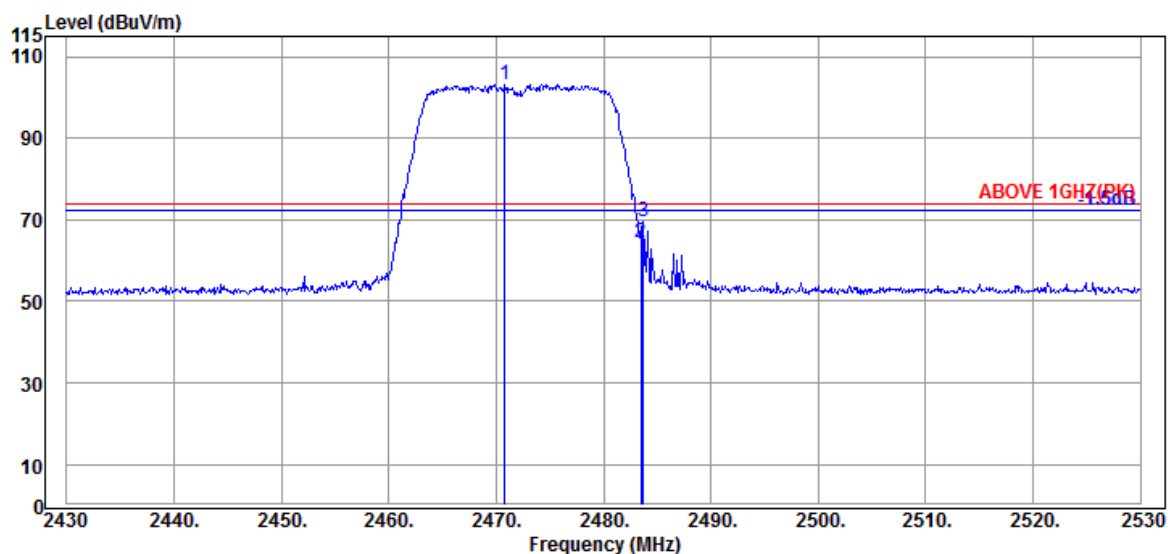

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.800	32.30	6.18	34.55	99.39	103.32	---	---	Peak
2483.500	32.30	6.18	34.55	60.29	64.22	74.00	9.78	Peak
2483.700	32.30	6.18	34.55	65.55	69.48	74.00	4.52	Peak

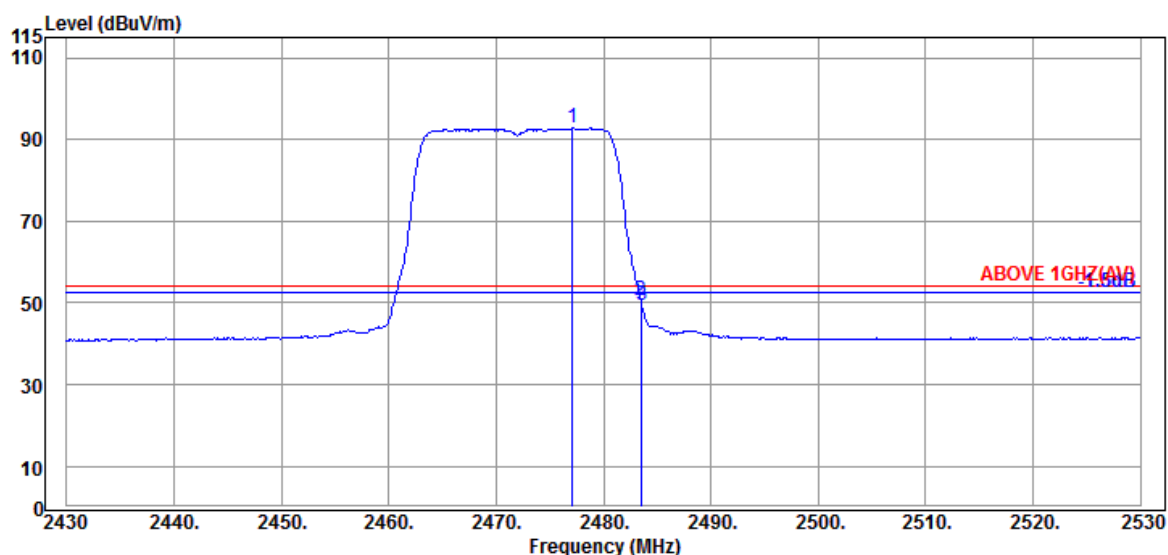

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.100	32.30	6.18	34.55	88.81	92.74	---	---	Average
2483.500	32.30	6.18	34.55	46.84	50.77	54.00	3.23	Average
2483.600	32.30	6.18	34.55	45.48	49.41	54.00	4.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

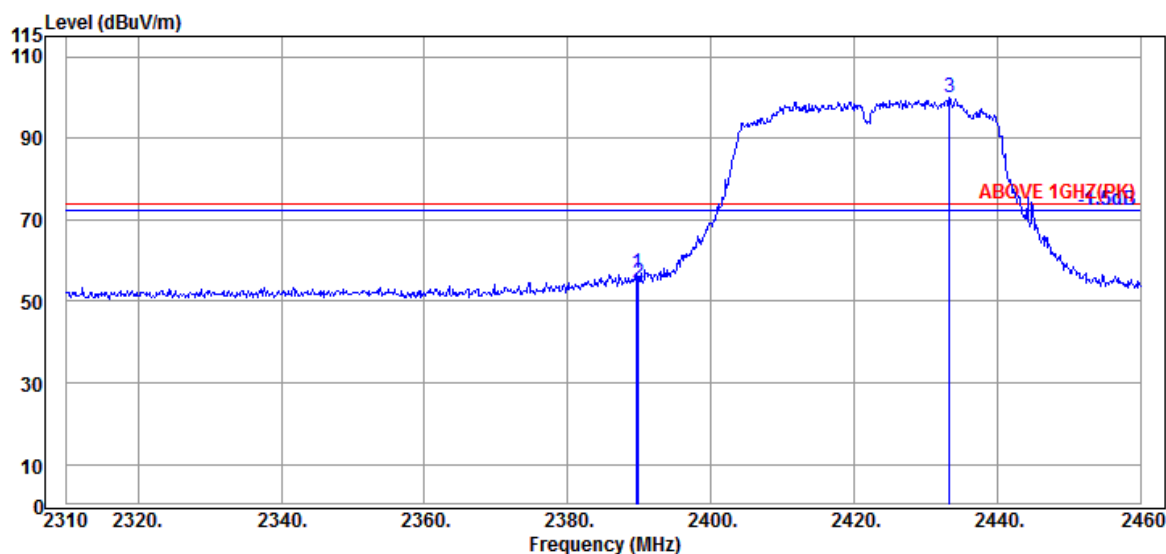

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	6.04	34.53	53.34	56.74	74.00	17.26	Peak
2389.950	31.89	6.04	34.54	50.98	54.37	74.00	19.63	Peak
@ 2433.300	32.16	6.10	34.54	96.17	99.89	---	---	Peak

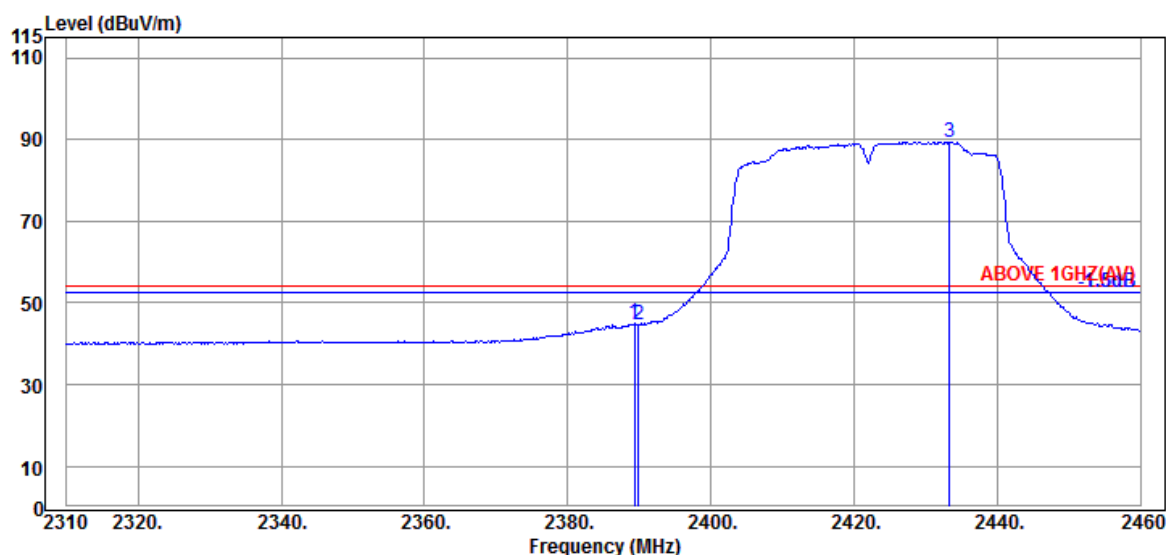

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	31.89	6.04	34.53	41.46	44.86	54.00	9.14	Average
2389.950	31.89	6.04	34.54	41.23	44.62	54.00	9.38	Average
@ 2433.300	32.16	6.10	34.54	85.79	89.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

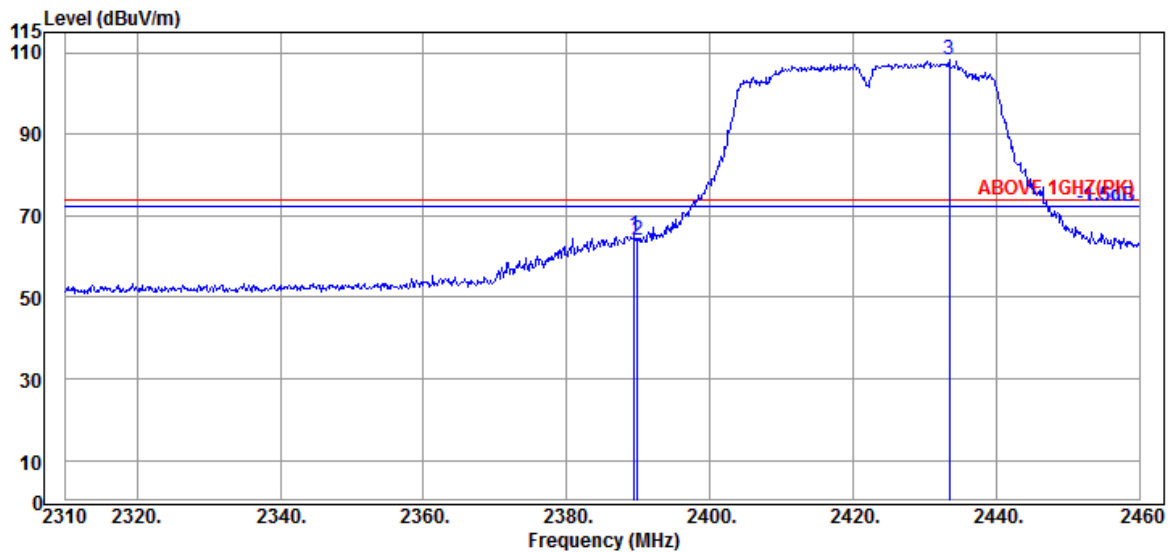

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	61.64	65.04	74.00	8.96	Peak
2389.950	31.89	6.04	34.54	60.81	64.20	74.00	9.80	Peak
@ 2433.450	32.16	6.10	34.54	104.39	108.11	---	---	Peak

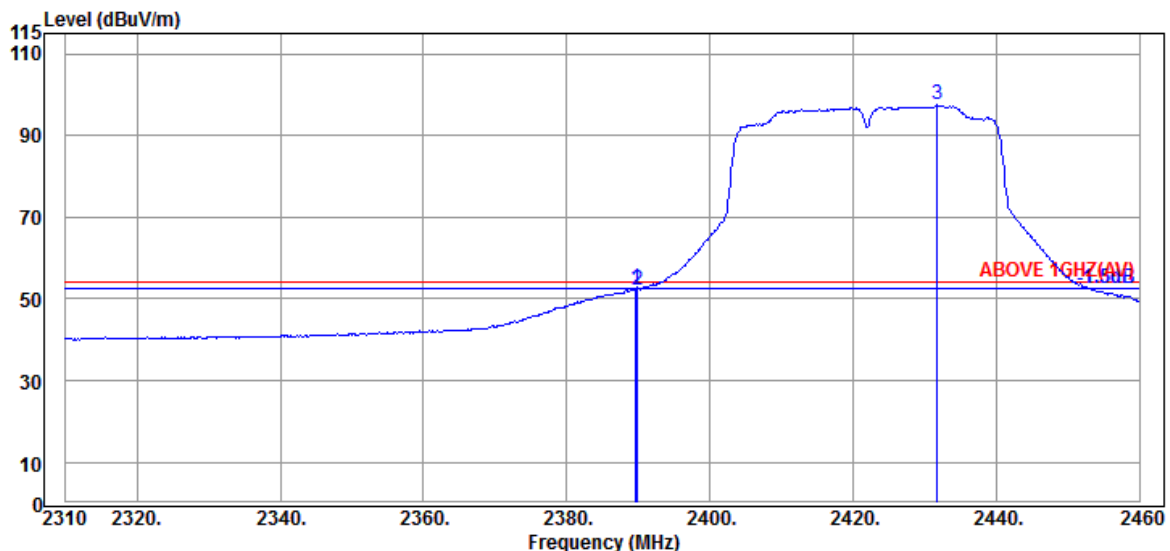

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	6.04	34.53	49.06	52.46	54.00	1.54	Average
2389.950	31.89	6.04	34.54	48.93	52.32	54.00	1.68	Average
@ 2431.800	32.09	6.10	34.54	93.80	97.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

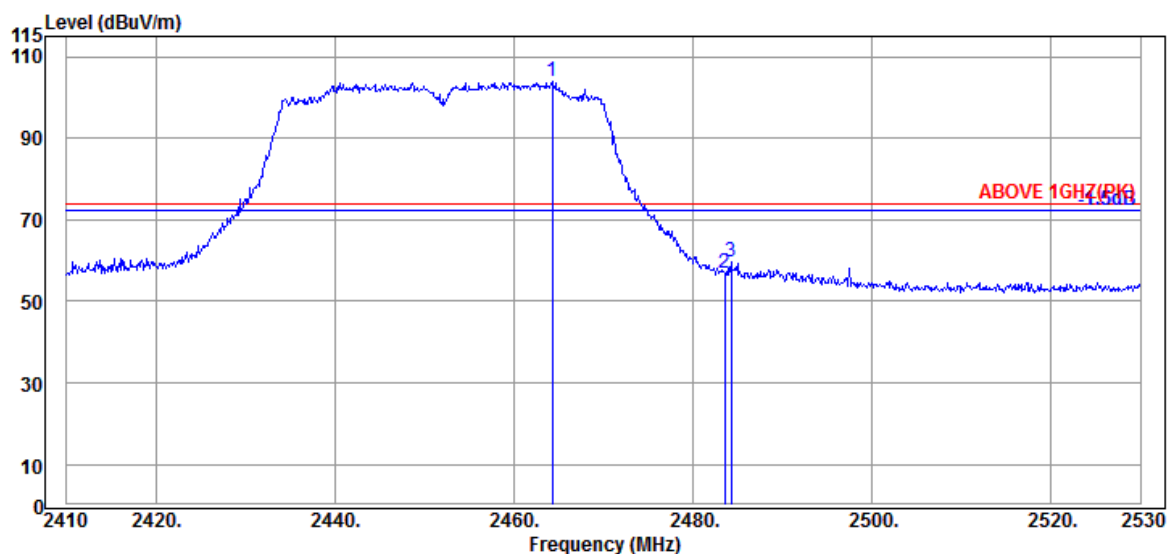

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.240	32.30	6.15	34.55	99.94	103.84	---	---	Peak
2483.560	32.30	6.18	34.55	53.11	57.04	74.00	16.96	Peak
2484.280	32.30	6.18	34.55	55.62	59.55	74.00	14.45	Peak

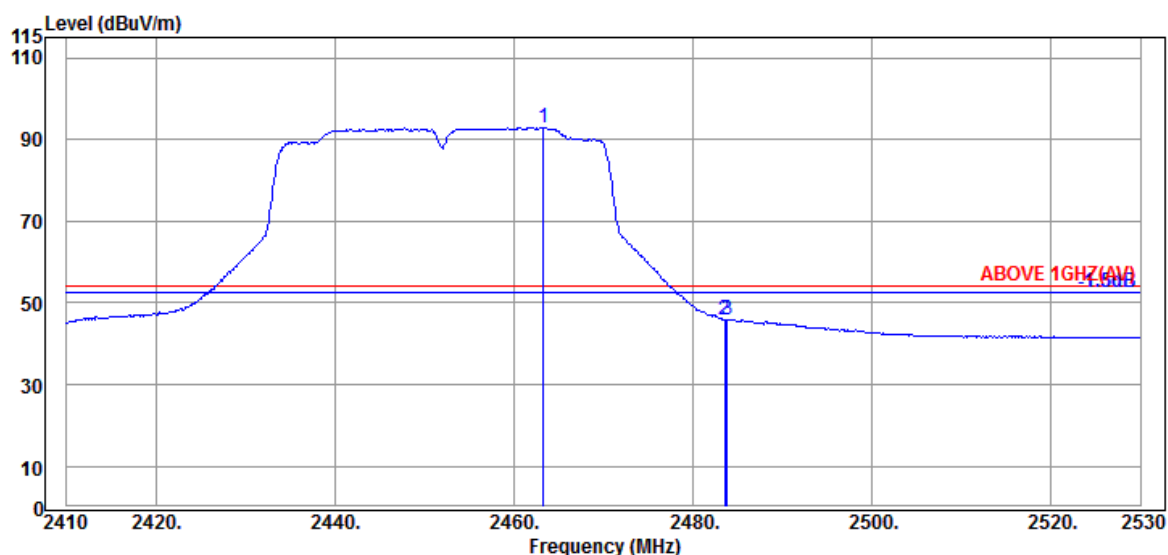


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.280	32.30	6.15	34.55	89.03	92.93	---	---	Average
2483.560	32.30	6.18	34.55	42.06	45.99	54.00	8.01	Average
2483.800	32.30	6.18	34.55	42.10	46.03	54.00	7.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

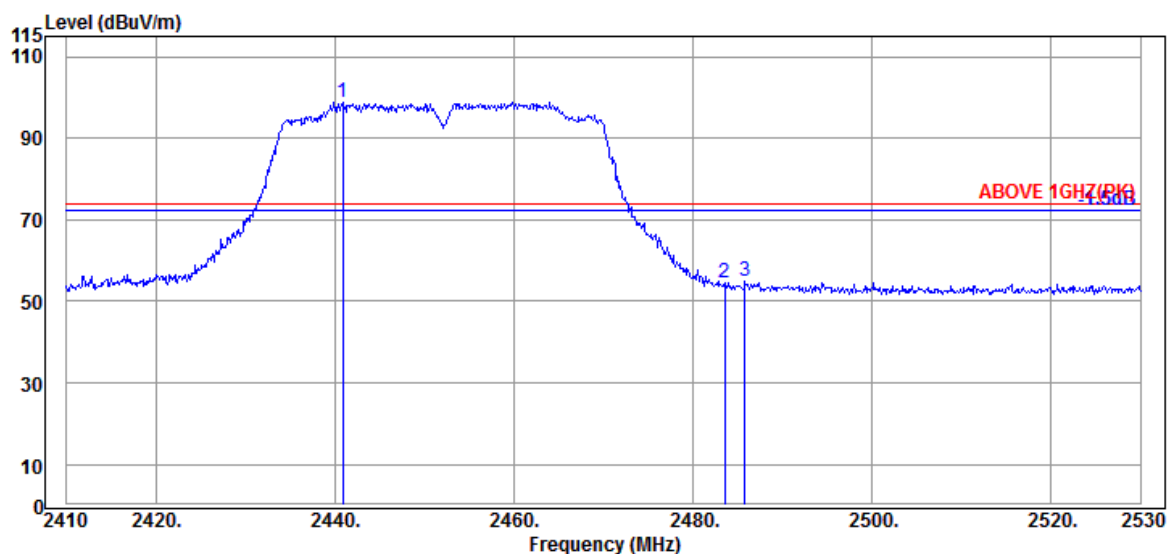

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.840	32.23	6.13	34.55	95.13	98.94	---	---	Peak
2483.560	32.30	6.18	34.55	50.49	54.42	74.00	19.58	Peak
2485.840	32.30	6.18	34.55	51.08	55.01	74.00	18.99	Peak

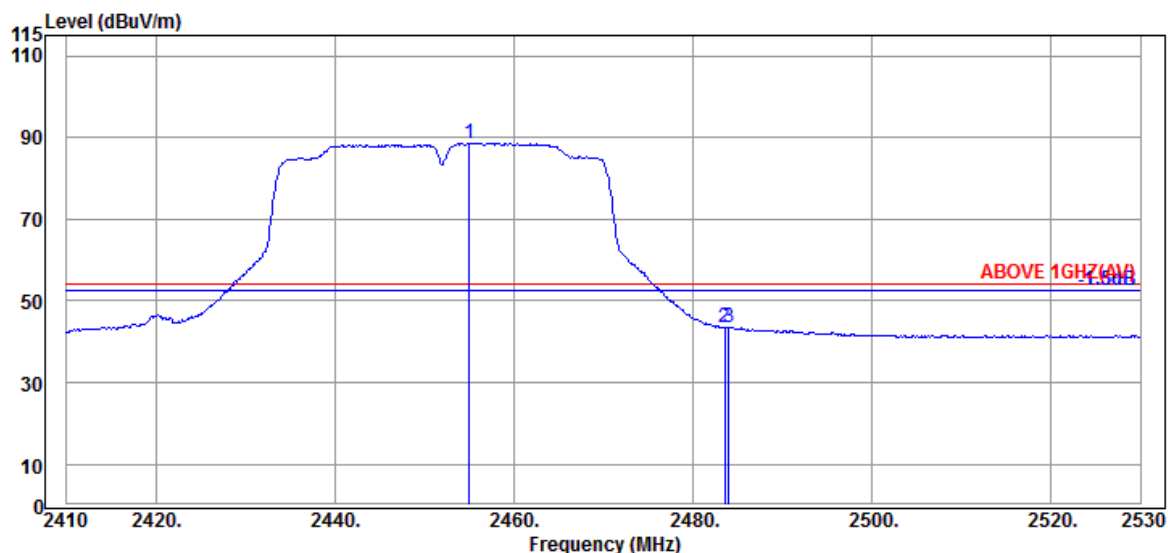

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	6.15	34.55	84.74	88.64	---	---	Average
2483.560	32.30	6.18	34.55	39.39	43.32	54.00	10.68	Average
2484.040	32.30	6.18	34.55	39.70	43.63	54.00	10.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

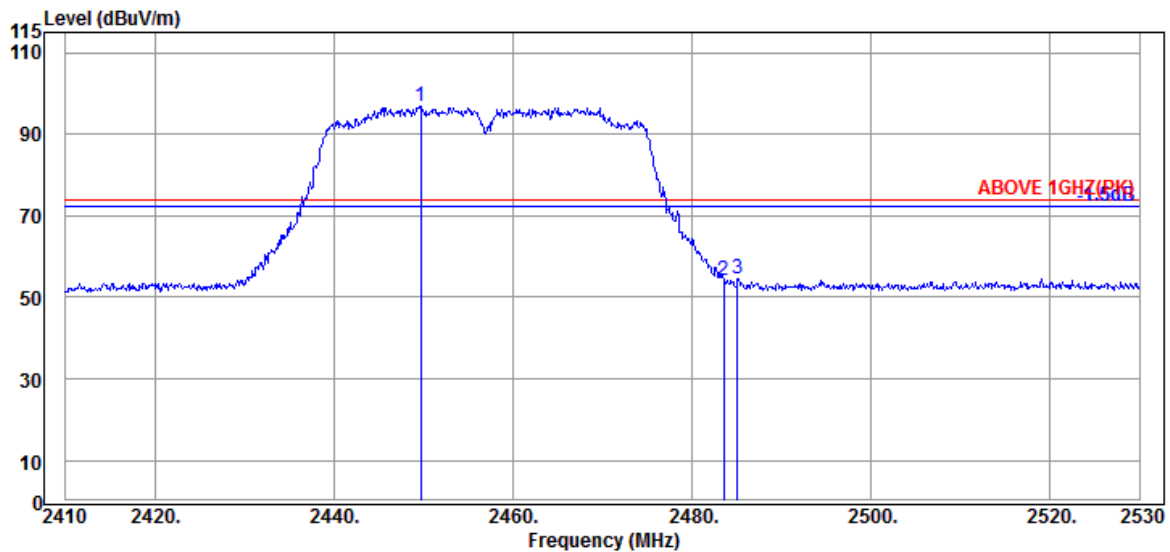

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2449.720	32.30	6.13	34.55	93.01	96.89	---	---	Peak
2483.560	32.30	6.18	34.55	50.22	54.15	74.00	19.85	Peak
2485.120	32.30	6.18	34.55	50.76	54.69	74.00	19.31	Peak

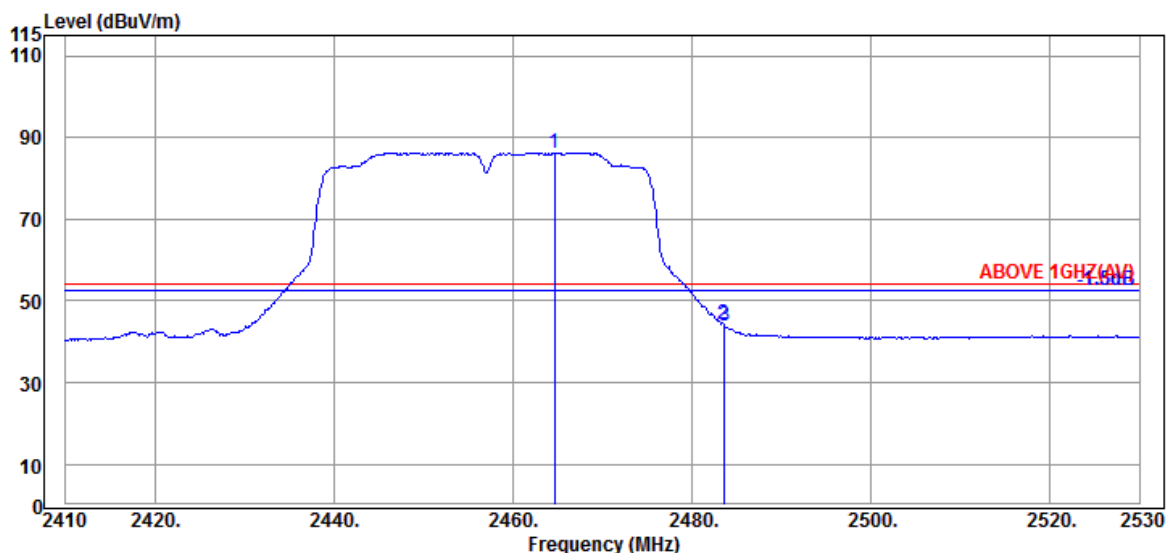

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.600	32.30	6.15	34.55	82.44	86.34	---	---	Average
2483.560	32.30	6.18	34.55	40.17	44.10	54.00	9.90	Average
2483.680	32.30	6.18	34.55	39.89	43.82	54.00	10.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

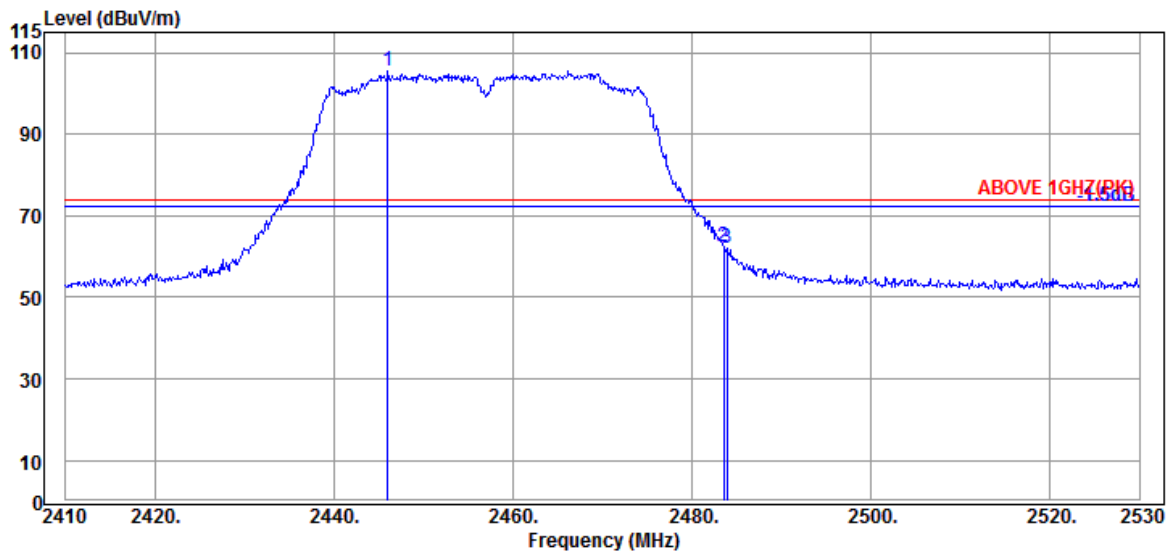

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	32.23	6.13	34.55	101.65	105.46	---	---	Peak
2483.560	32.30	6.18	34.55	58.58	62.51	74.00	11.49	Peak
2483.920	32.30	6.18	34.55	58.22	62.15	74.00	11.85	Peak

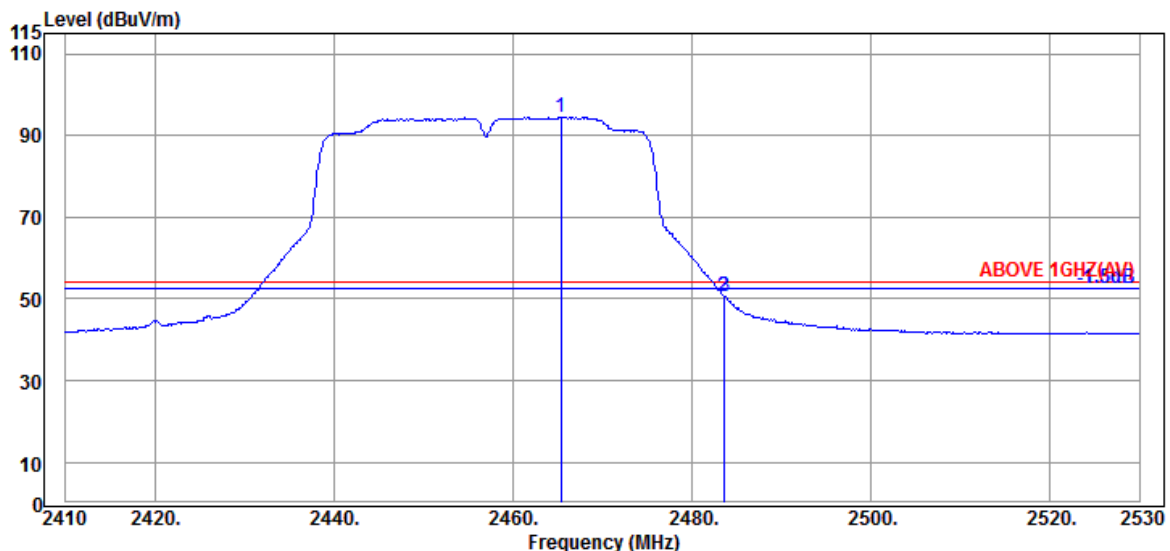

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.320	32.30	6.15	34.55	90.57	94.47	---	---	Average
2483.560	32.30	6.18	34.55	46.85	50.78	54.00	3.22	Average
2483.680	32.30	6.18	34.55	46.70	50.63	54.00	3.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

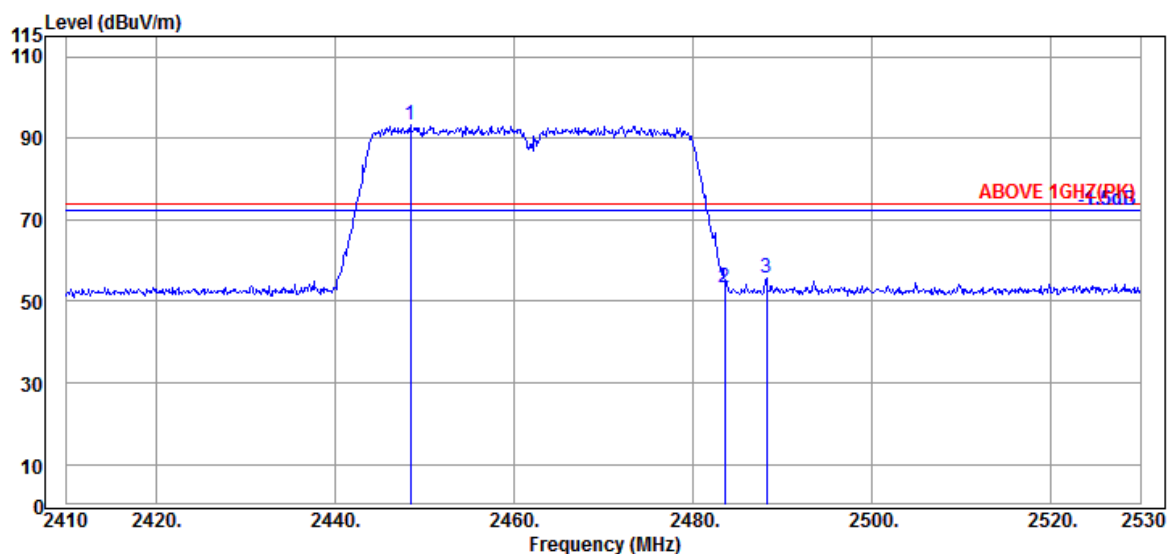

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.400	32.30	6.13	34.55	89.32	93.20	---	---	Peak
2483.560	32.30	6.18	34.55	49.48	53.41	74.00	20.59	Peak
2488.240	32.30	6.21	34.55	51.62	55.58	74.00	18.42	Peak

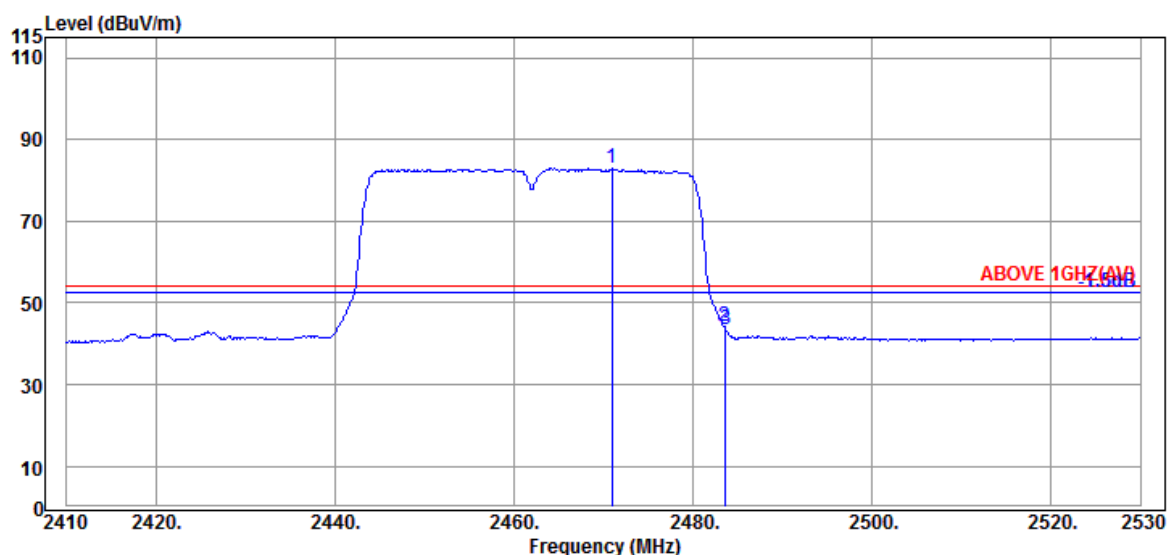

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.960	32.30	6.18	34.55	79.04	82.97	---	---	Average
2483.560	32.30	6.18	34.55	40.32	44.25	54.00	9.75	Average
2483.680	32.30	6.18	34.55	39.57	43.50	54.00	10.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

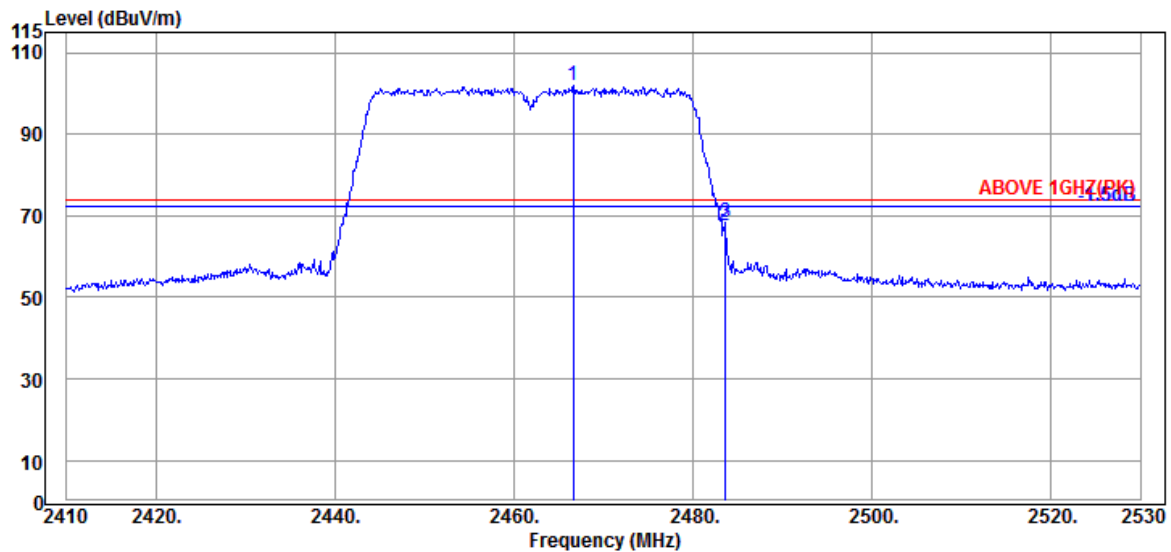

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.640	32.30	6.15	34.55	97.89	101.79	---	---	Peak
2483.560	32.30	6.18	34.55	63.47	67.40	74.00	6.60	Peak
2484.640	32.30	6.18	34.55	55.42	59.35	74.00	14.65	Peak

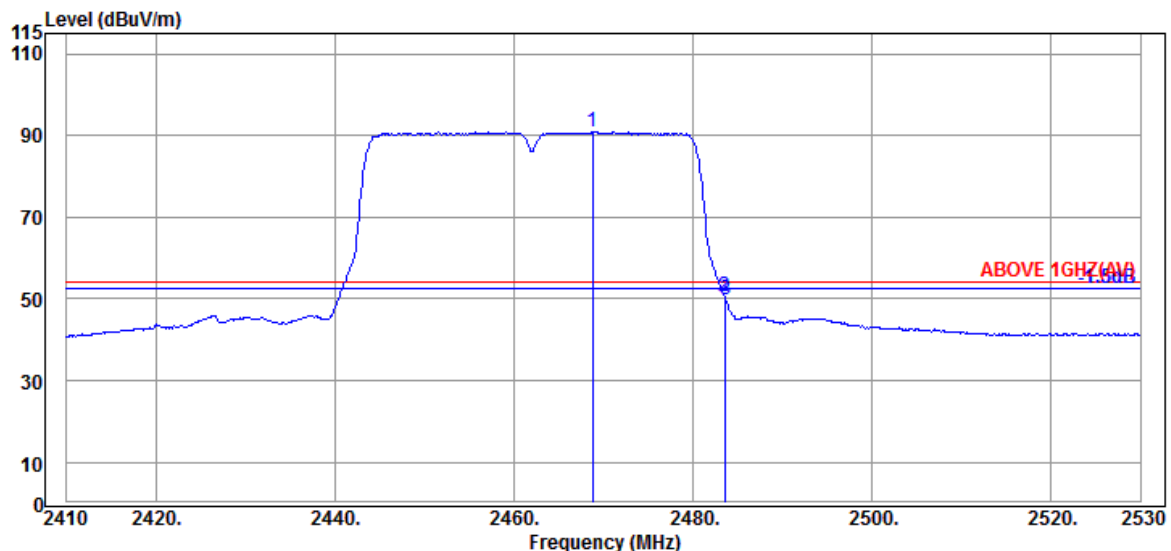

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	32.30	6.15	34.55	87.01	90.91	---	---	Average
2483.560	32.30	6.18	34.55	46.75	50.68	54.00	3.32	Average
2483.680	32.30	6.18	34.55	46.00	49.93	54.00	4.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

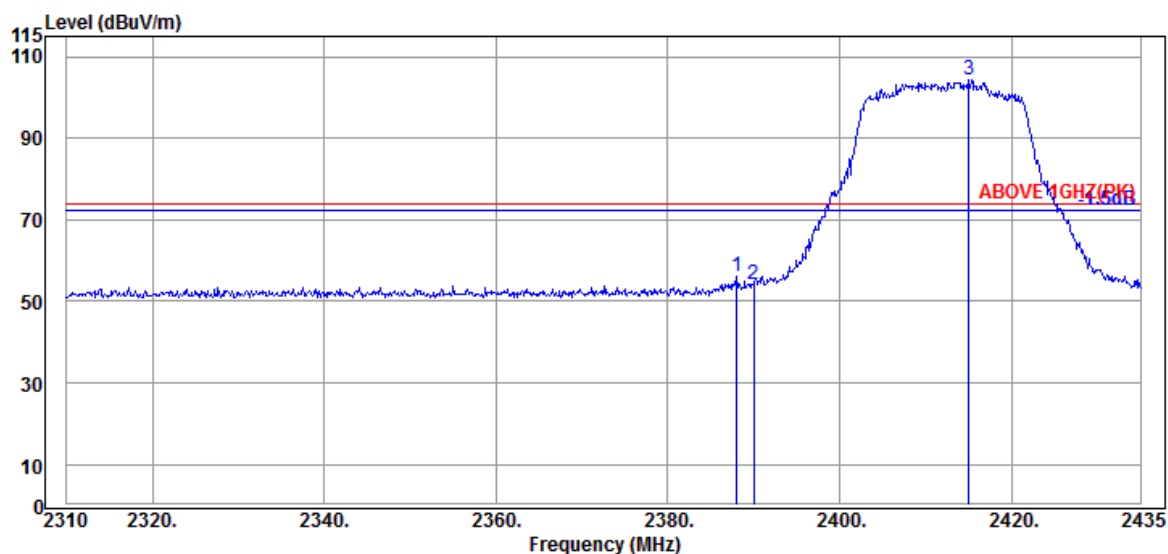

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	31.89	6.04	34.53	52.64	56.04	74.00	17.96	Peak
2390.000	31.89	6.04	34.54	50.76	54.15	74.00	19.85	Peak
@ 2415.000	31.94	6.07	34.54	100.76	104.23	---	---	Peak

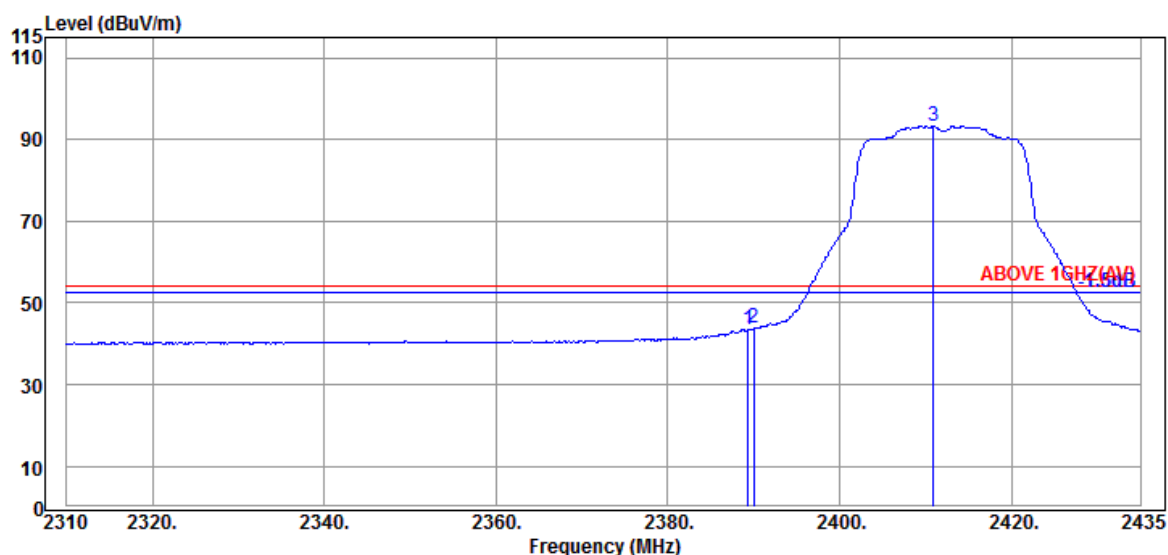

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	40.21	43.61	54.00	10.39	Average
2390.000	31.89	6.04	34.54	40.43	43.82	54.00	10.18	Average
@ 2410.875	31.87	6.07	34.54	89.96	93.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

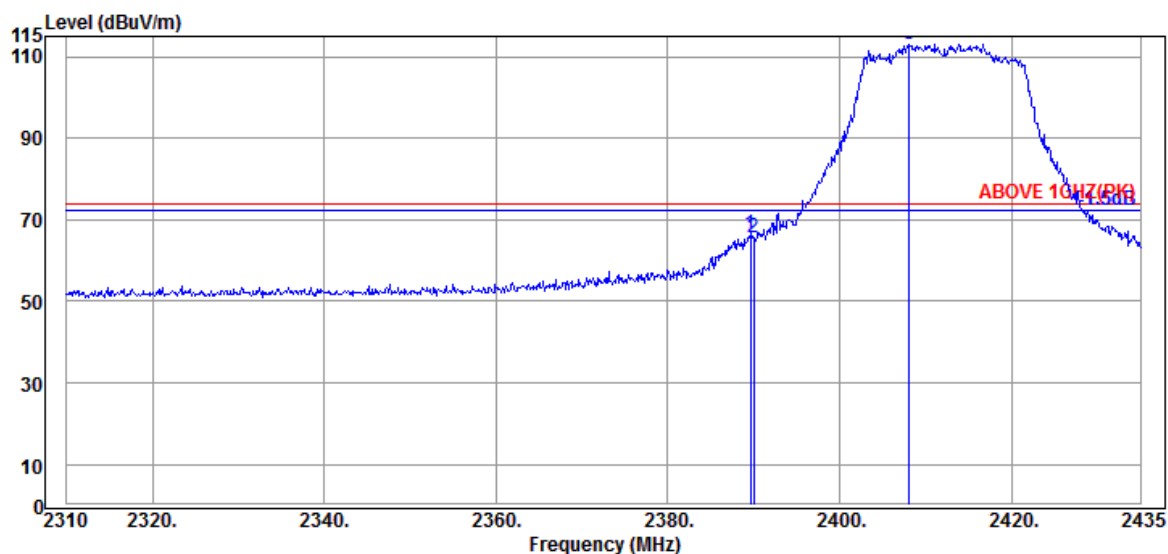

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	62.81	66.21	74.00	7.79	Peak
2390.000	31.89	6.04	34.54	62.29	65.68	74.00	8.32	Peak
@ 2408.125	31.87	6.07	34.54	109.79	113.19	---	---	Peak

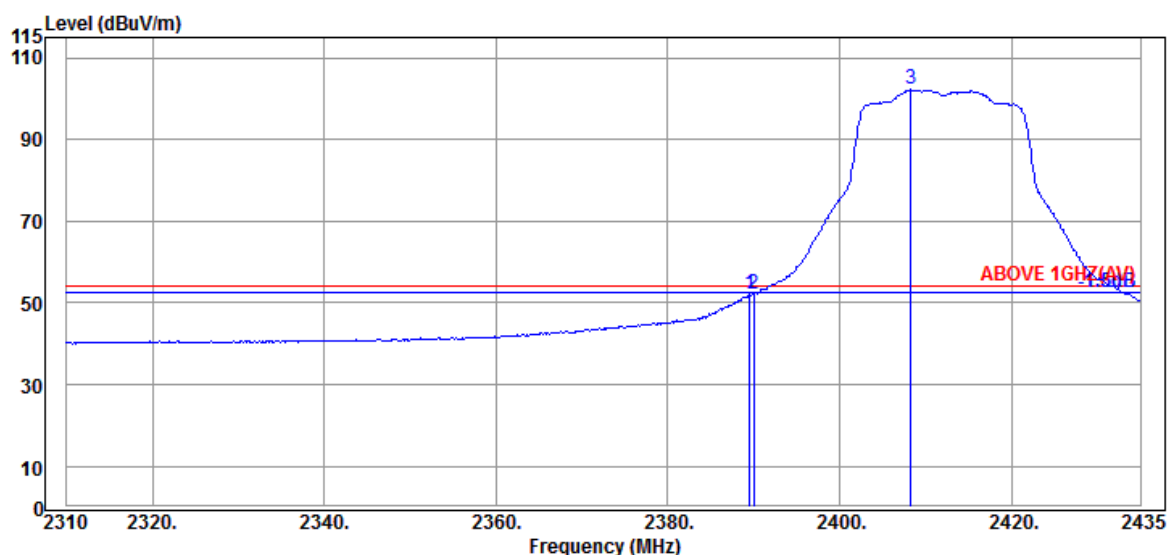

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	48.57	51.97	54.00	2.03	Average
2390.000	31.89	6.04	34.54	48.79	52.18	54.00	1.82	Average
@ 2408.250	31.87	6.07	34.54	98.79	102.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

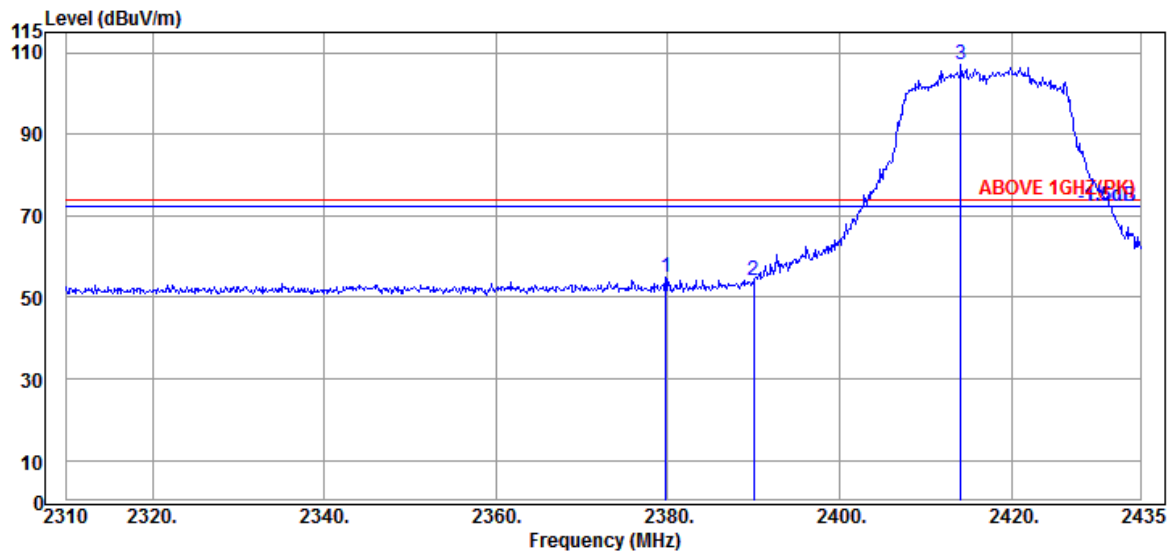

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.750	31.93	6.01	34.53	51.35	54.76	74.00	19.24	Peak
2390.000	31.89	6.04	34.54	50.85	54.24	74.00	19.76	Peak
@ 2414.125	31.94	6.07	34.54	103.57	107.04	---	---	Peak

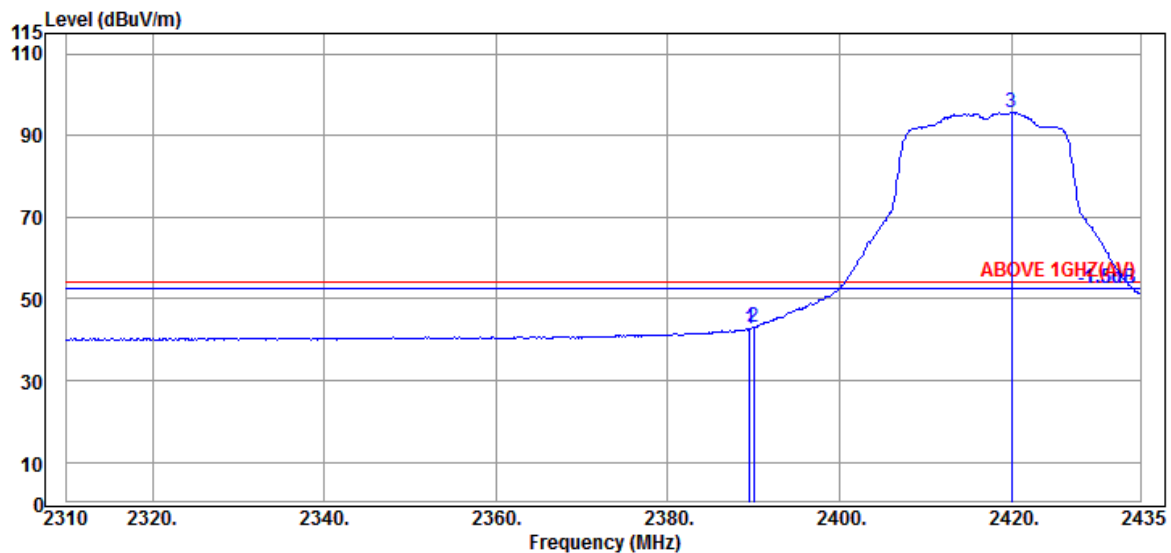

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	39.31	42.71	54.00	11.29	Average
2390.000	31.89	6.04	34.54	39.58	42.97	54.00	11.03	Average
@ 2420.000	32.01	6.10	34.54	92.00	95.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

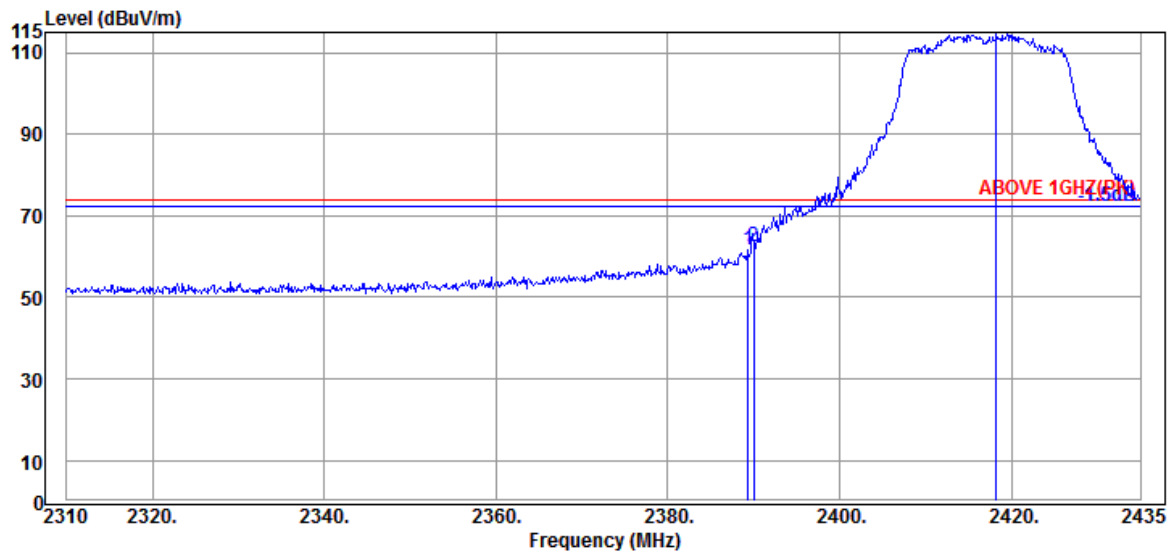

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	58.14	61.54	74.00	12.46	Peak
2390.000	31.89	6.04	34.54	59.03	62.42	74.00	11.58	Peak
@ 2418.250	32.01	6.07	34.54	111.39	114.93	---	---	Peak

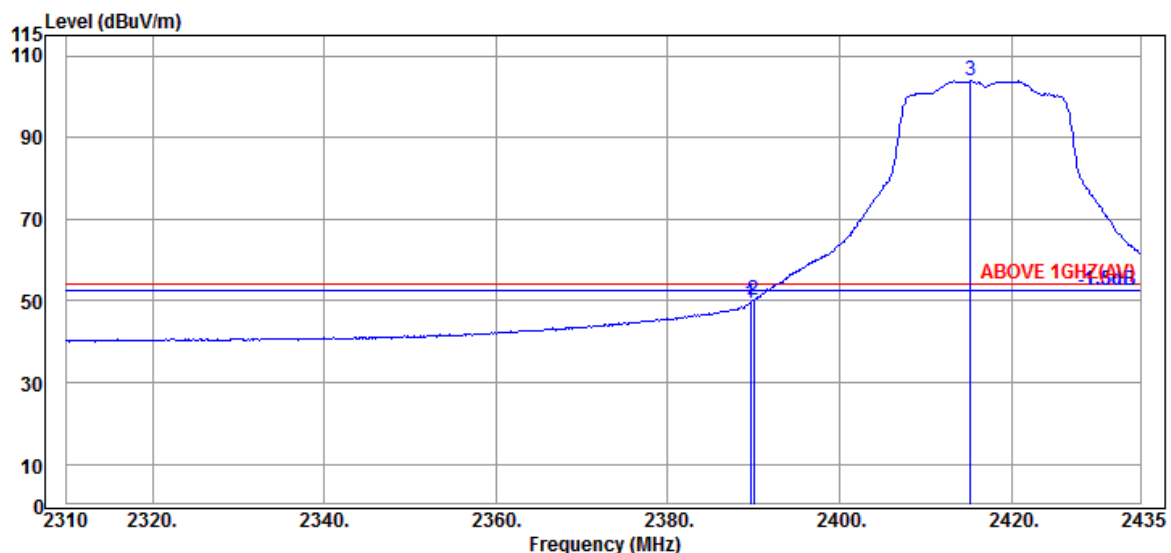

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	45.94	49.34	54.00	4.66	Average
2390.000	31.89	6.04	34.54	46.80	50.19	54.00	3.81	Average
@ 2415.250	31.94	6.07	34.54	100.39	103.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

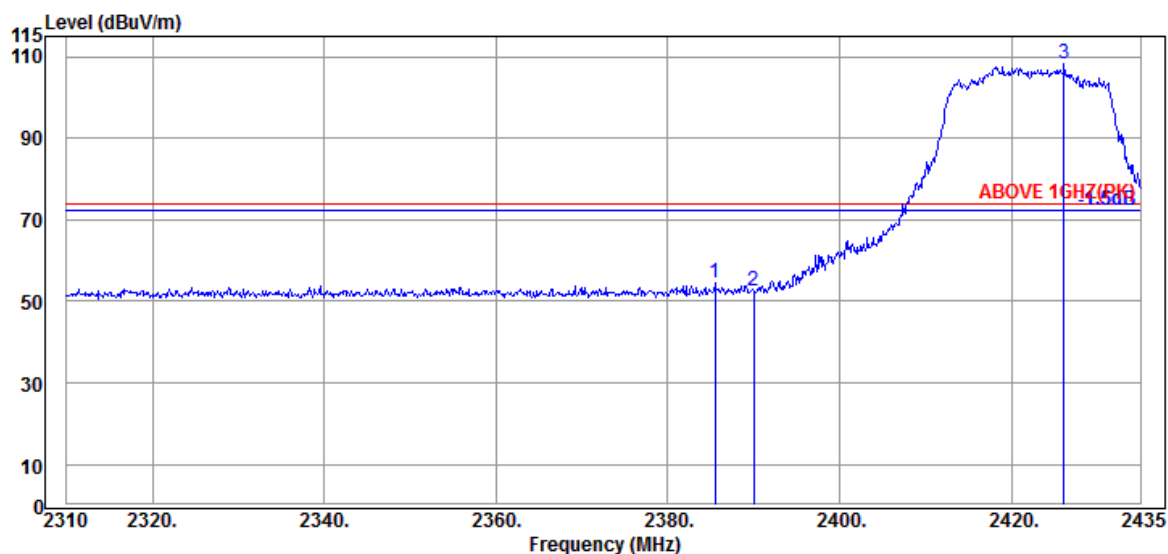

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.500	31.89	6.04	34.53	51.32	54.72	74.00	19.28	Peak
2390.000	31.89	6.04	34.54	49.10	52.49	74.00	21.51	Peak
@ 2426.125	32.09	6.10	34.54	104.53	108.18	---	---	Peak

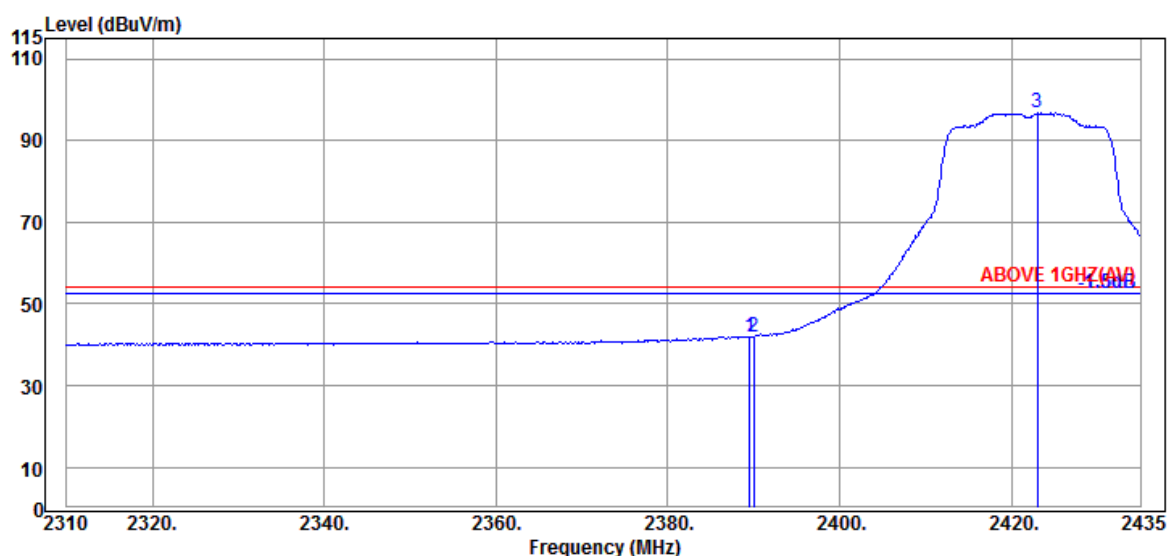

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	38.66	42.06	54.00	11.94	Average
2390.000	31.89	6.04	34.54	38.67	42.06	54.00	11.94	Average
@ 2423.000	32.01	6.10	34.54	93.24	96.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

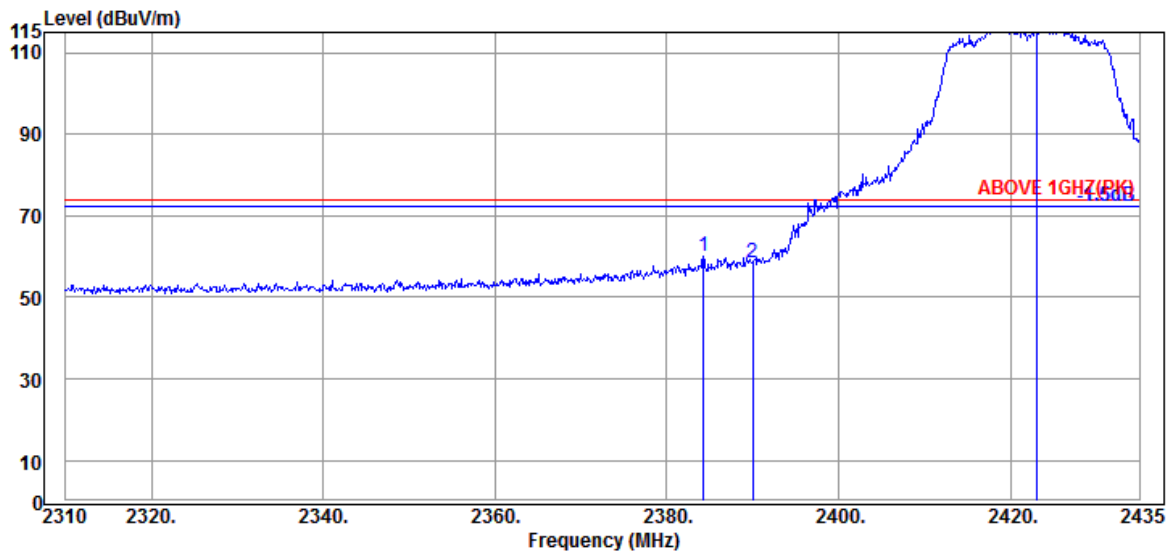

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.250	31.89	6.01	34.53	56.64	60.01	74.00	13.99	Peak
2390.000	31.89	6.04	34.54	54.90	58.29	74.00	15.71	Peak
@ 2423.000	32.01	6.10	34.54	113.34	116.91	---	---	Peak

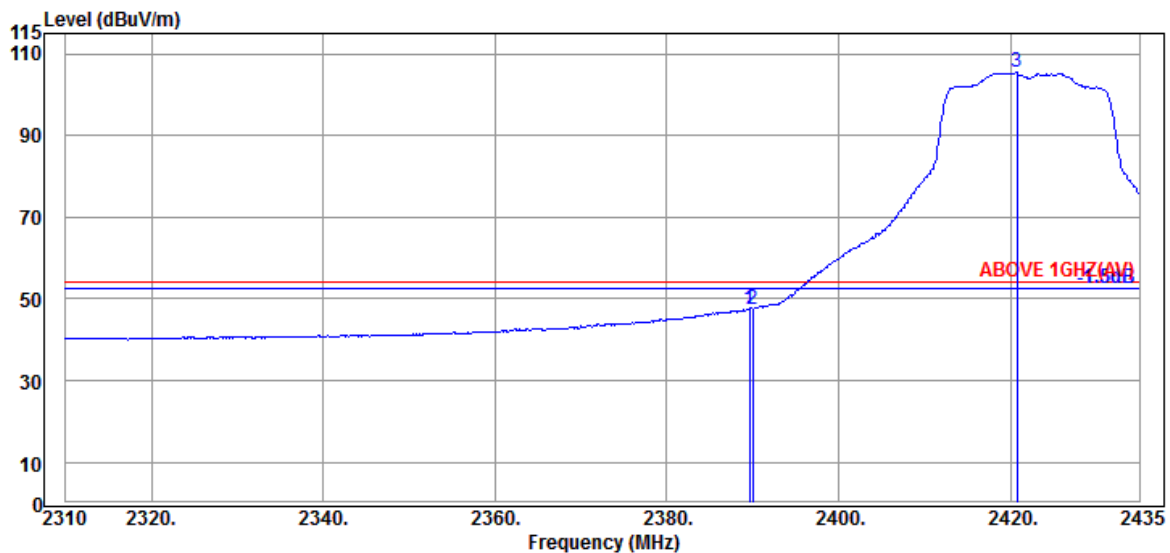

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	44.06	47.46	54.00	6.54	Average
2390.000	31.89	6.04	34.54	44.07	47.46	54.00	6.54	Average
@ 2420.750	32.01	6.10	34.54	101.89	105.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

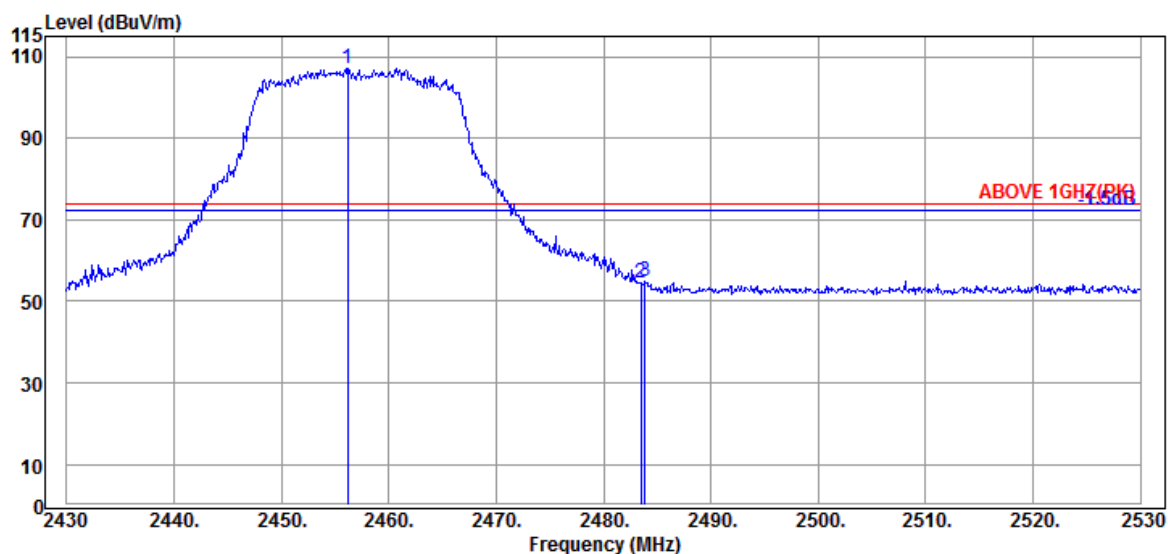

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.200	32.30	6.15	34.55	103.20	107.10	---	---	Peak
2483.500	32.30	6.18	34.55	50.67	54.60	74.00	19.40	Peak
2483.900	32.30	6.18	34.55	50.88	54.81	74.00	19.19	Peak

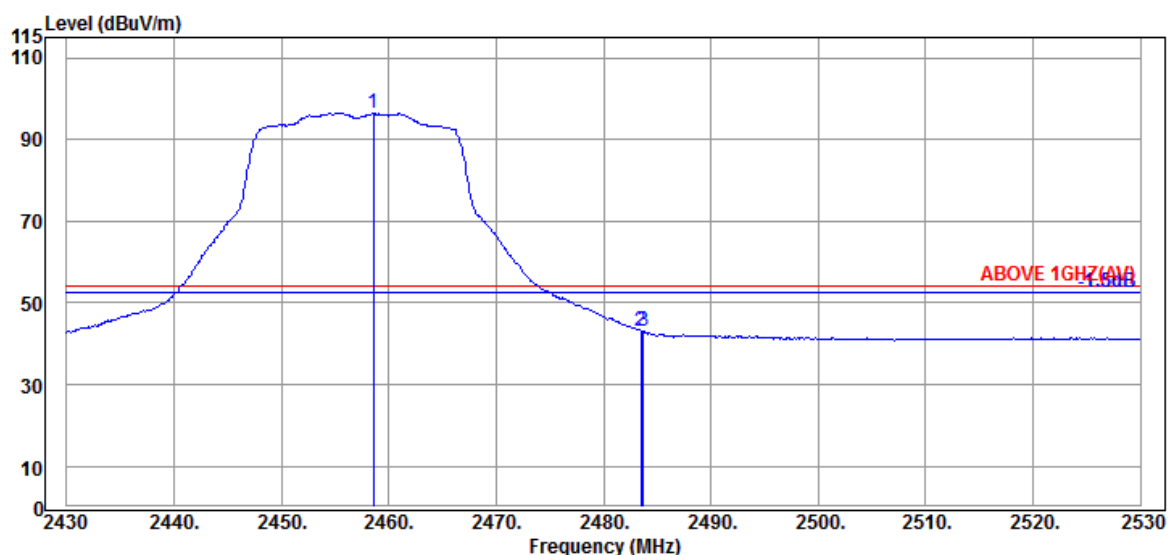

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	32.30	6.15	34.55	92.64	96.54	---	---	Average
2483.500	32.30	6.18	34.55	39.15	43.08	54.00	10.92	Average
2483.700	32.30	6.18	34.55	39.08	43.01	54.00	10.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

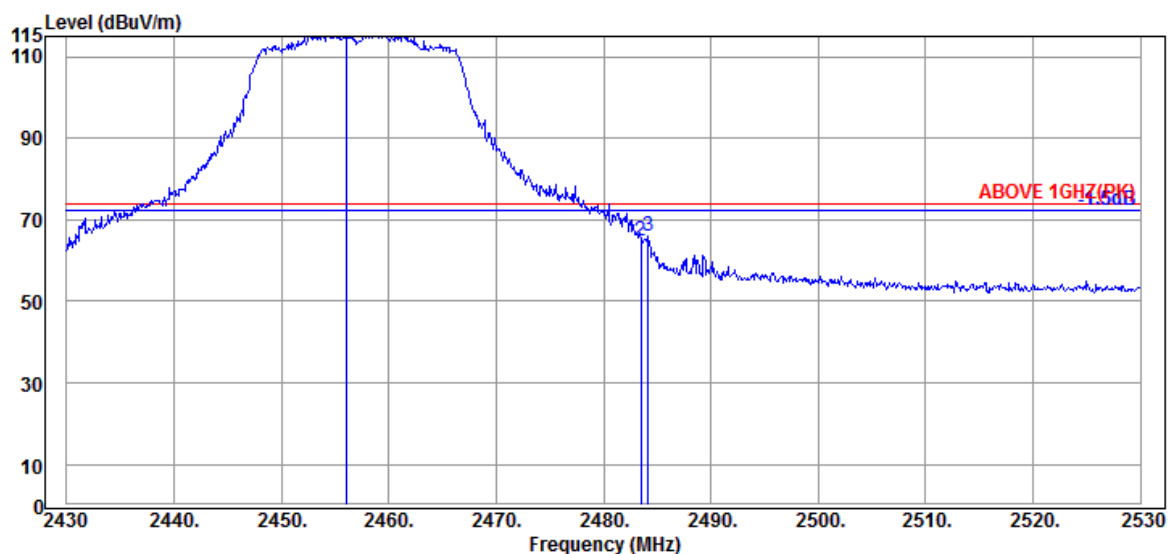

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.100	32.30	6.15	34.55	112.70	116.60	---	---	Peak
2483.500	32.30	6.18	34.55	60.86	64.79	74.00	9.21	Peak
2484.200	32.30	6.18	34.55	62.17	66.10	74.00	7.90	Peak

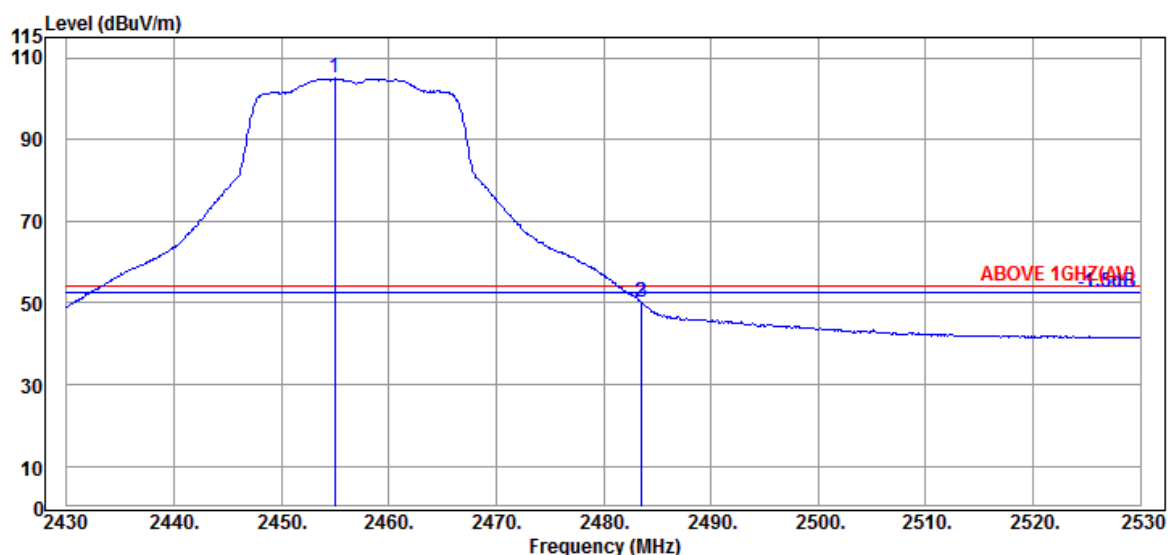

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	6.15	34.55	101.05	104.95	---	---	Average
2483.500	32.30	6.18	34.55	46.14	50.07	54.00	3.93	Average
2483.600	32.30	6.18	34.55	46.07	50.00	54.00	4.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

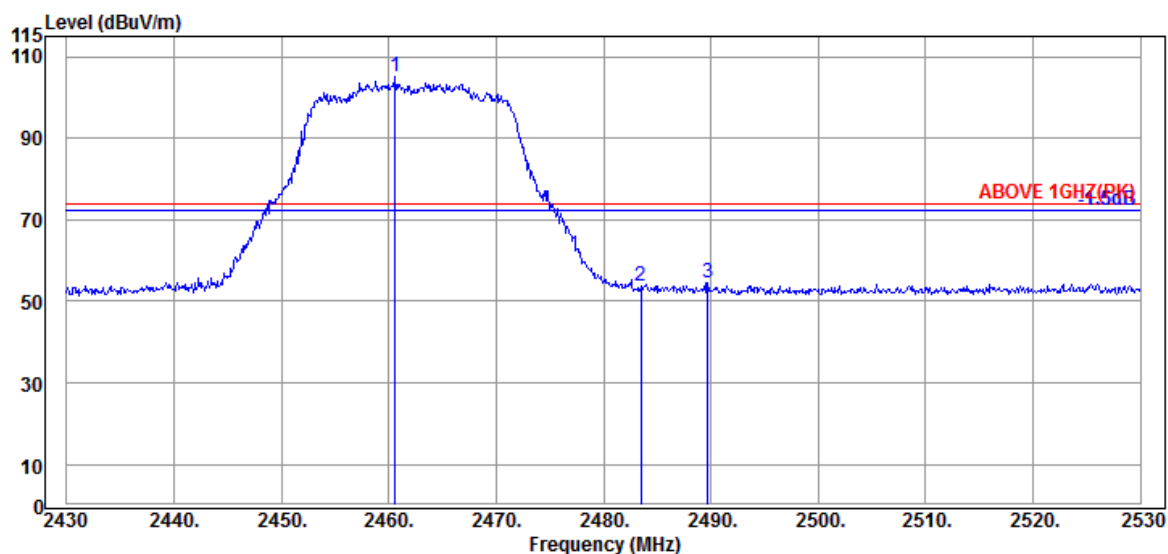

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.600	32.30	6.15	34.55	101.34	105.24	---	---	Peak
2483.500	32.30	6.18	34.55	49.69	53.62	74.00	20.38	Peak
2489.700	32.30	6.21	34.55	50.48	54.44	74.00	19.56	Peak

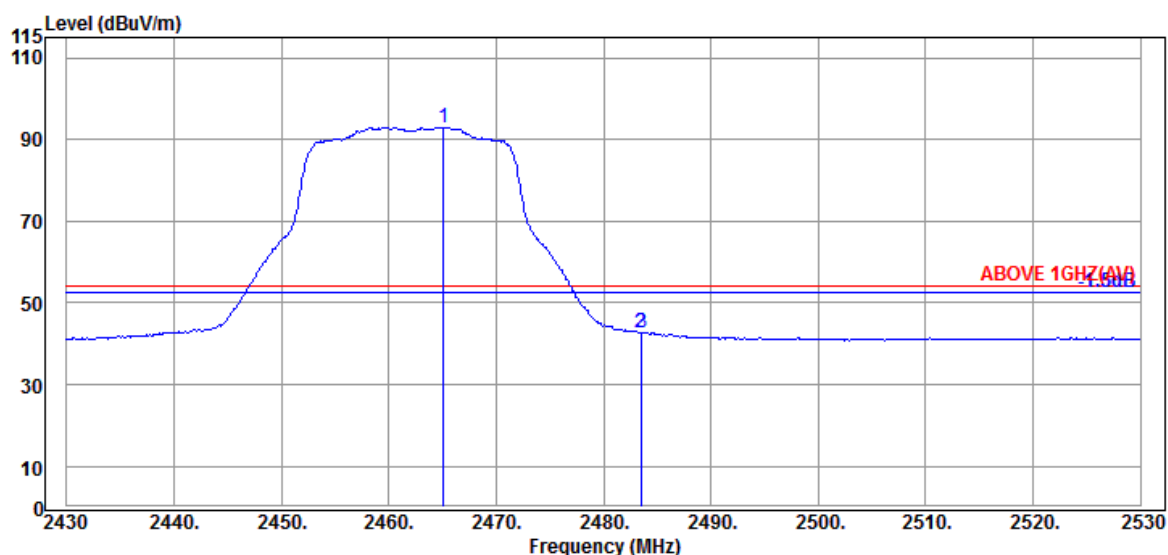

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.30	6.15	34.55	89.06	92.96	---	---	Average
2483.500	32.30	6.18	34.55	38.91	42.84	54.00	11.16	Average
2483.600	32.30	6.18	34.55	38.85	42.78	54.00	11.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

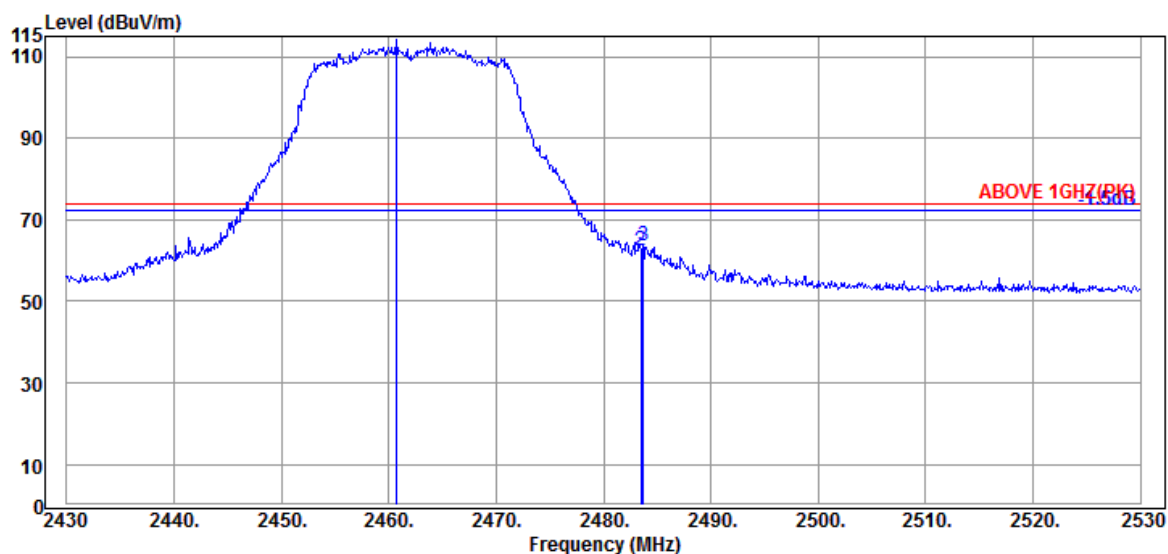

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.700	32.30	6.15	34.55	110.24	114.14	---	---	Peak
2483.500	32.30	6.18	34.55	58.61	62.54	74.00	11.46	Peak
2483.700	32.30	6.18	34.55	59.66	63.59	74.00	10.41	Peak

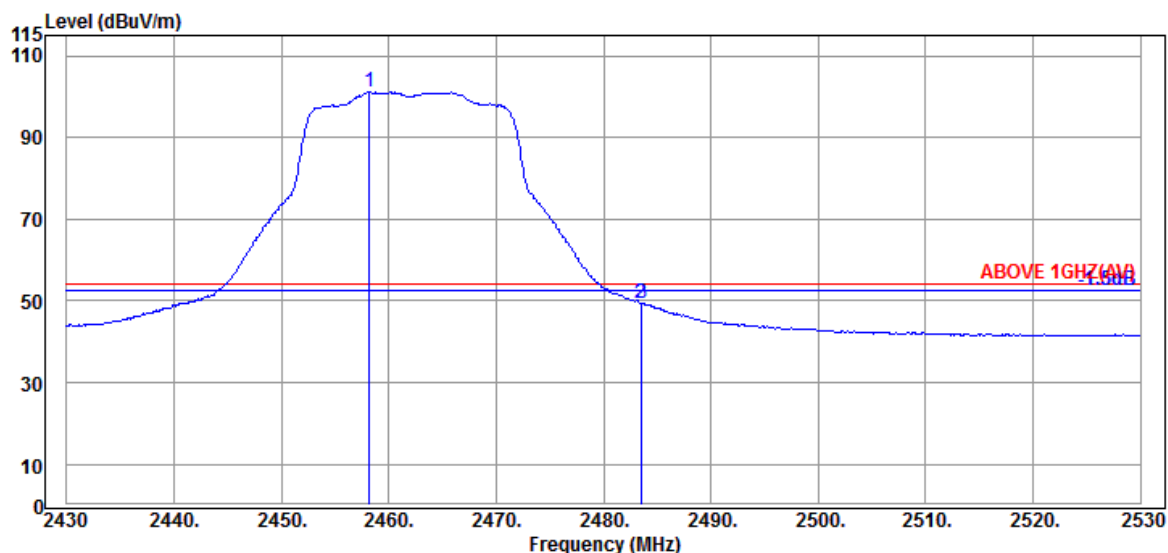

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.200	32.30	6.15	34.55	97.32	101.22	---	---	Average
2483.500	32.30	6.18	34.55	45.52	49.45	54.00	4.55	Average
2483.600	32.30	6.18	34.55	45.43	49.36	54.00	4.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

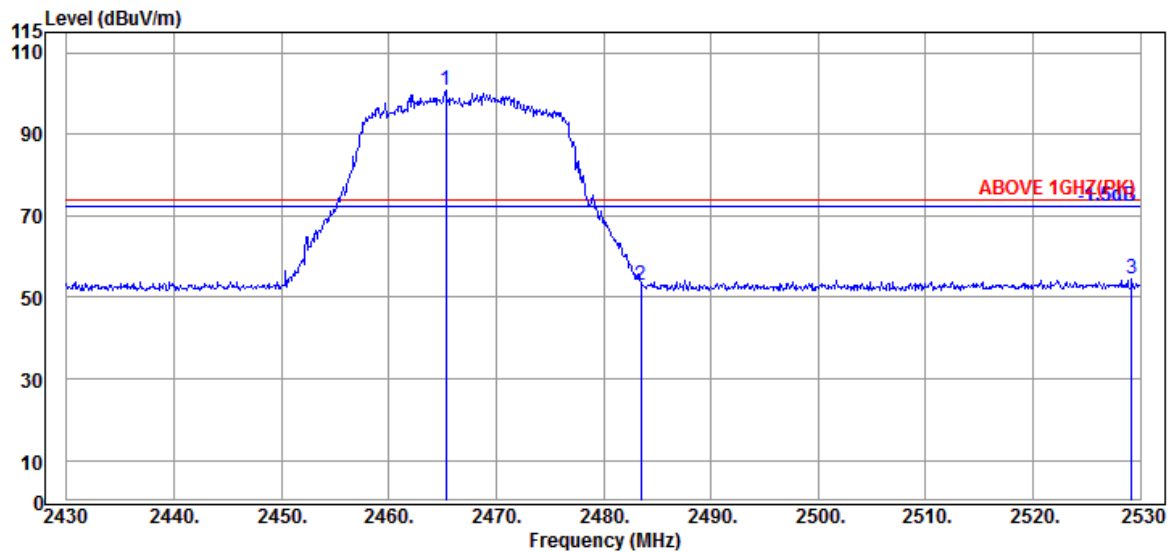

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	32.30	6.15	34.55	96.75	100.65	---	---	Peak
2483.500	32.30	6.18	34.55	49.14	53.07	74.00	20.93	Peak
2529.200	32.41	6.25	34.57	50.46	54.55	74.00	19.45	Peak

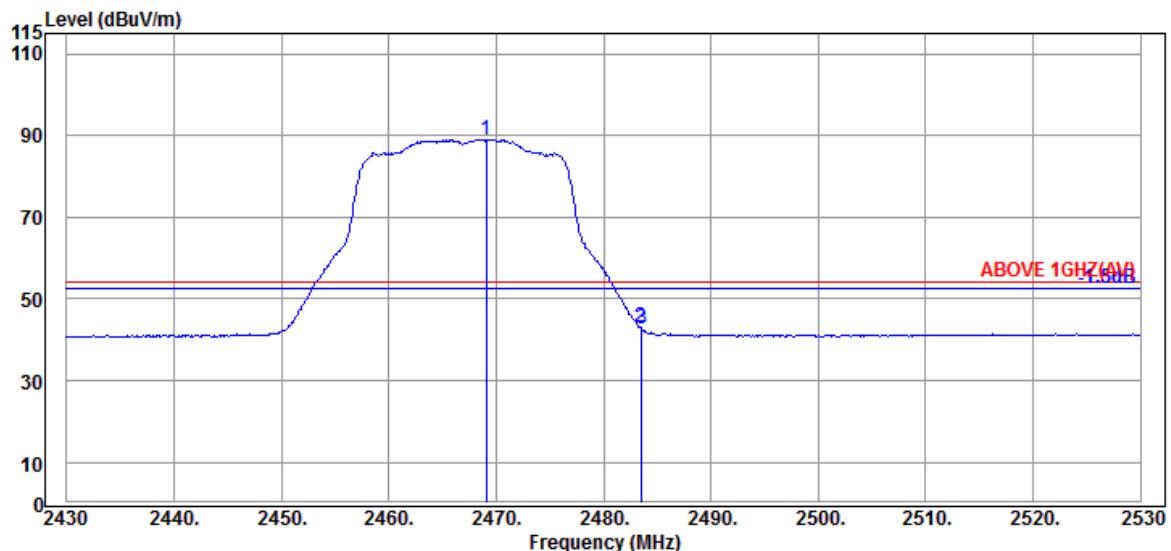

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	32.30	6.15	34.55	85.08	88.98	---	---	Average
2483.500	32.30	6.18	34.55	39.05	42.98	54.00	11.02	Average
2483.600	32.30	6.18	34.55	38.62	42.55	54.00	11.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

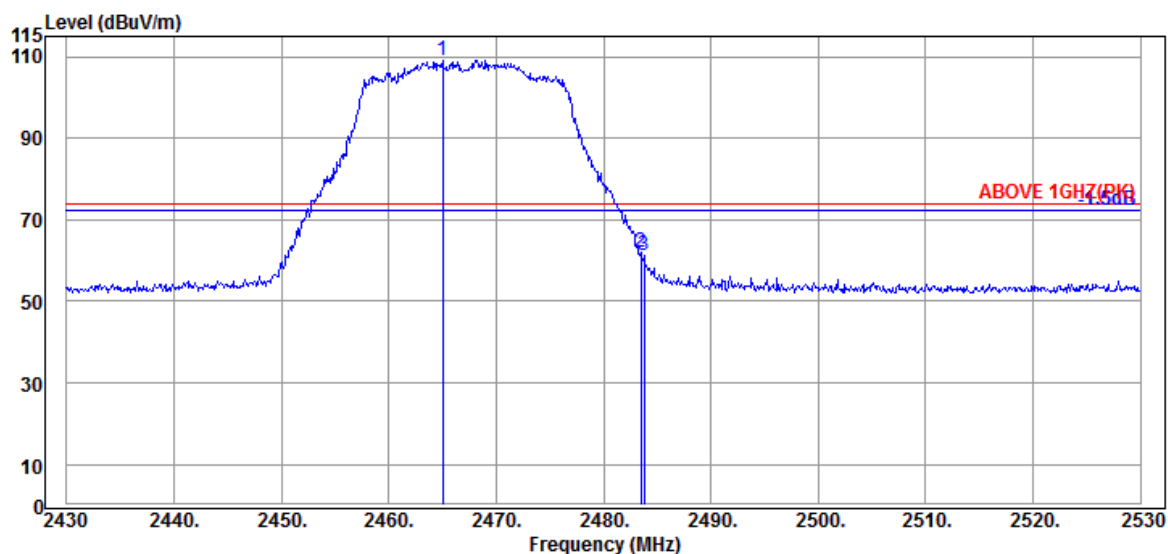

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	6.15	34.55	105.33	109.23	---	---	Peak
2483.500	32.30	6.18	34.55	58.01	61.94	74.00	12.06	Peak
2483.800	32.30	6.18	34.55	57.49	61.42	74.00	12.58	Peak

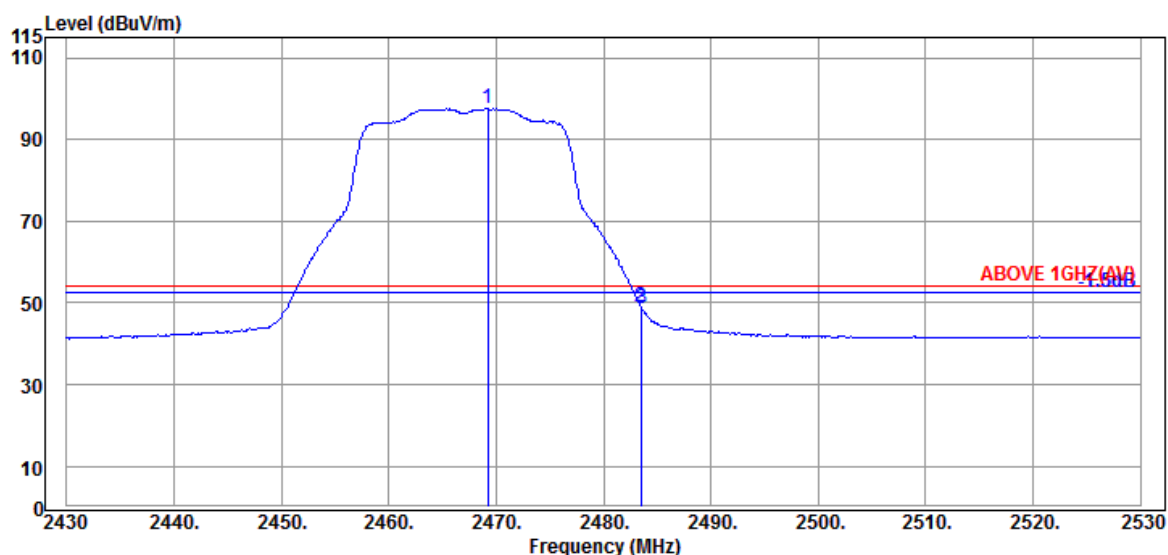

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	32.30	6.15	34.55	93.65	97.55	---	---	Average
2483.500	32.30	6.18	34.55	45.11	49.04	54.00	4.96	Average
2483.600	32.30	6.18	34.55	44.81	48.74	54.00	5.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

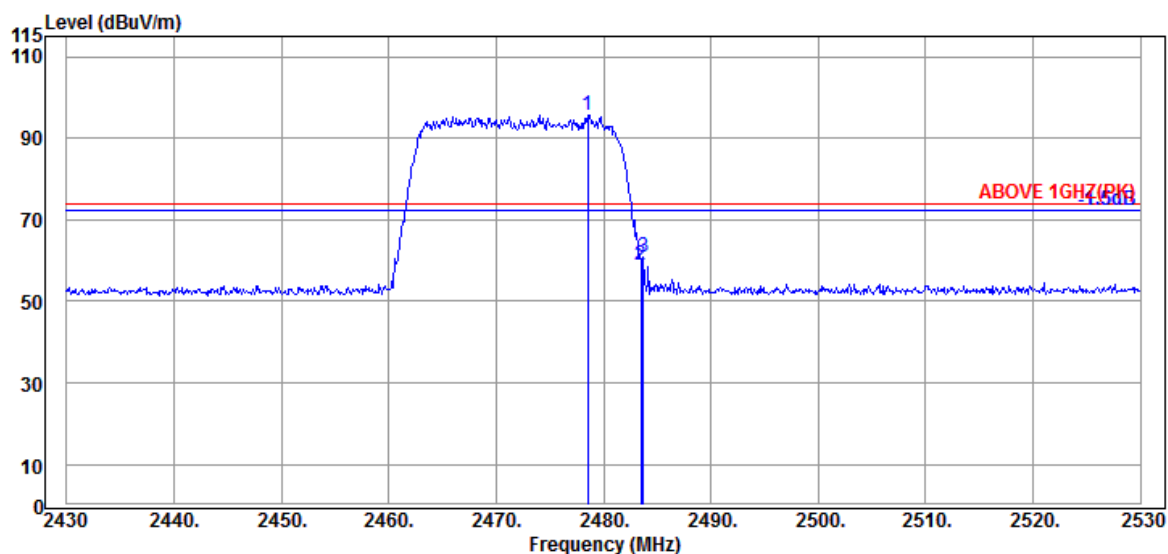

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	6.18	34.55	91.80	95.73	---	---	Peak
2483.500	32.30	6.18	34.55	54.97	58.90	74.00	15.10	Peak
2483.700	32.30	6.18	34.55	56.97	60.90	74.00	13.10	Peak

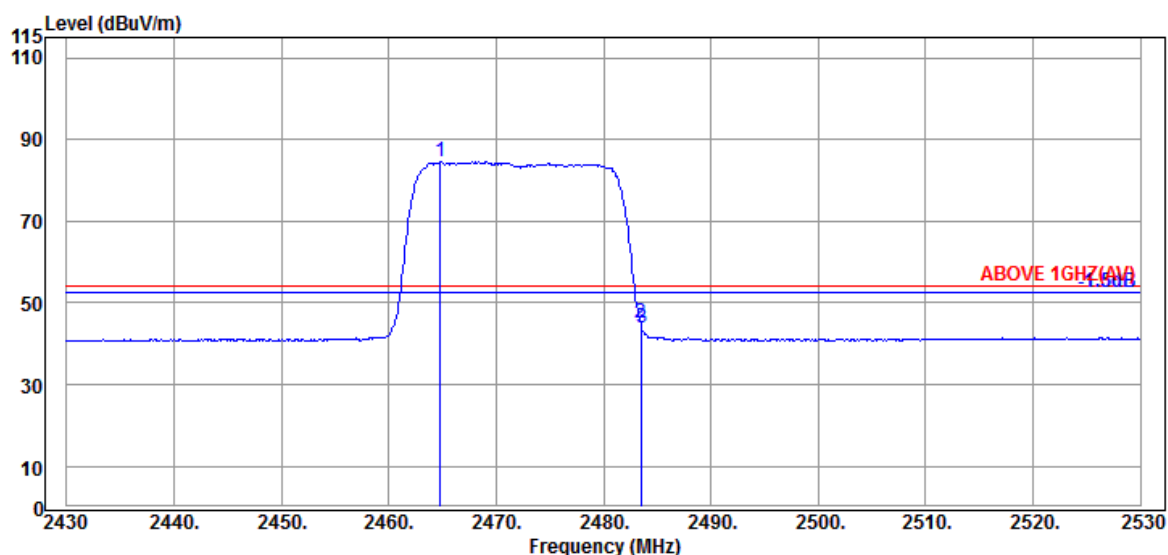

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	32.30	6.15	34.55	80.68	84.58	---	---	Average
2483.500	32.30	6.18	34.55	41.19	45.12	54.00	8.88	Average
2483.600	32.30	6.18	34.55	39.99	43.92	54.00	10.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

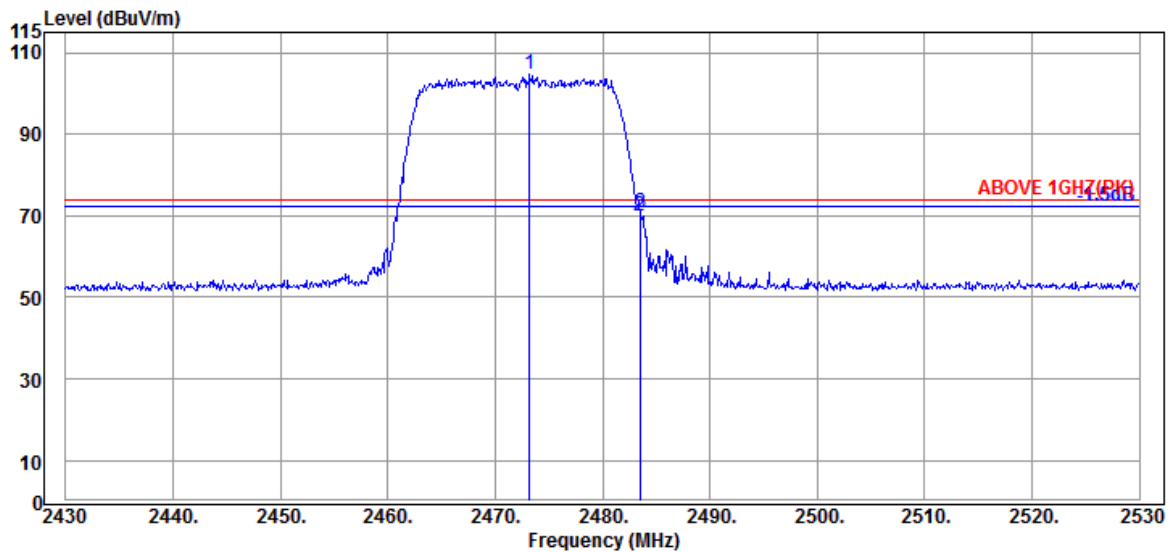

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.200	32.30	6.18	34.55	100.93	104.86	---	---	Peak
2483.500	32.30	6.18	34.55	65.98	69.91	74.00	4.09	Peak
2483.600	32.30	6.18	34.55	66.66	70.59	74.00	3.41	Peak

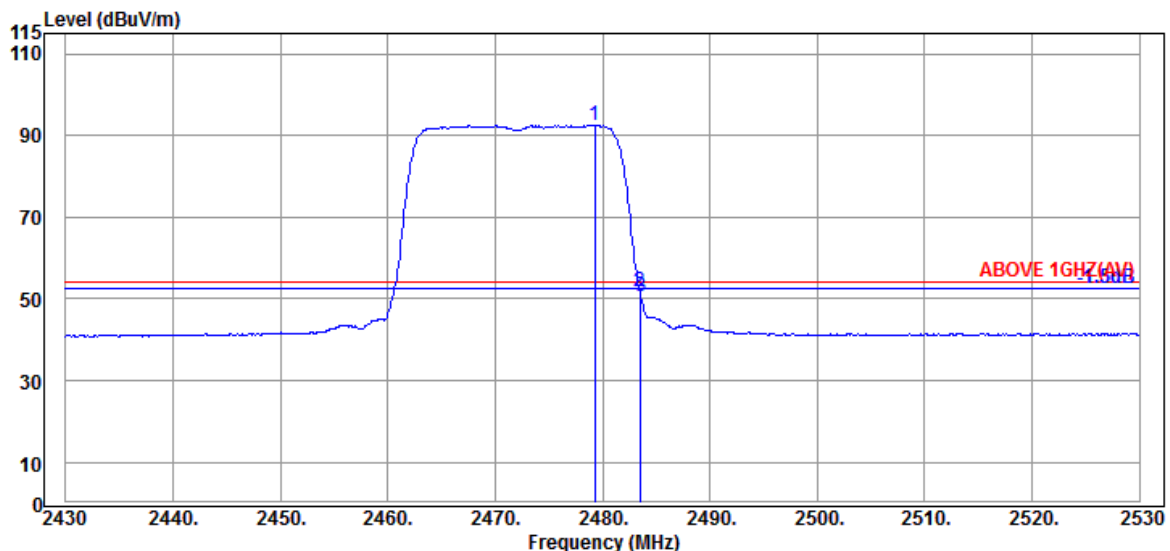

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	32.30	6.18	34.55	88.63	92.56	---	---	Average
2483.500	32.30	6.18	34.55	47.94	51.87	54.00	2.13	Average
2483.600	32.30	6.18	34.55	46.64	50.57	54.00	3.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

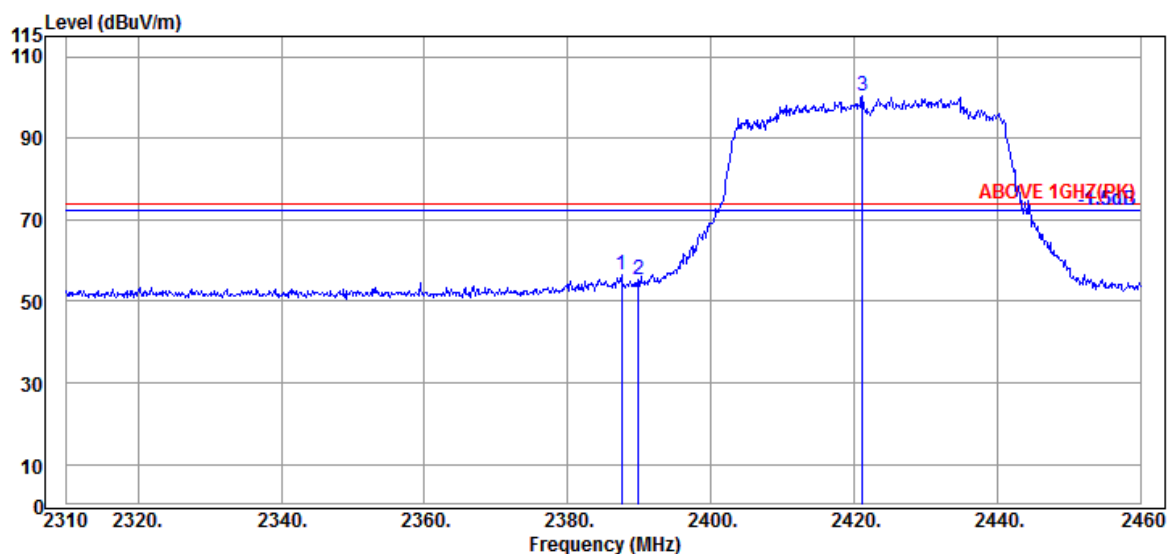

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.550	31.89	6.04	34.53	52.94	56.34	74.00	17.66	Peak
2389.950	31.89	6.04	34.54	51.99	55.38	74.00	18.62	Peak
@ 2421.150	32.01	6.10	34.54	96.70	100.27	---	---	Peak

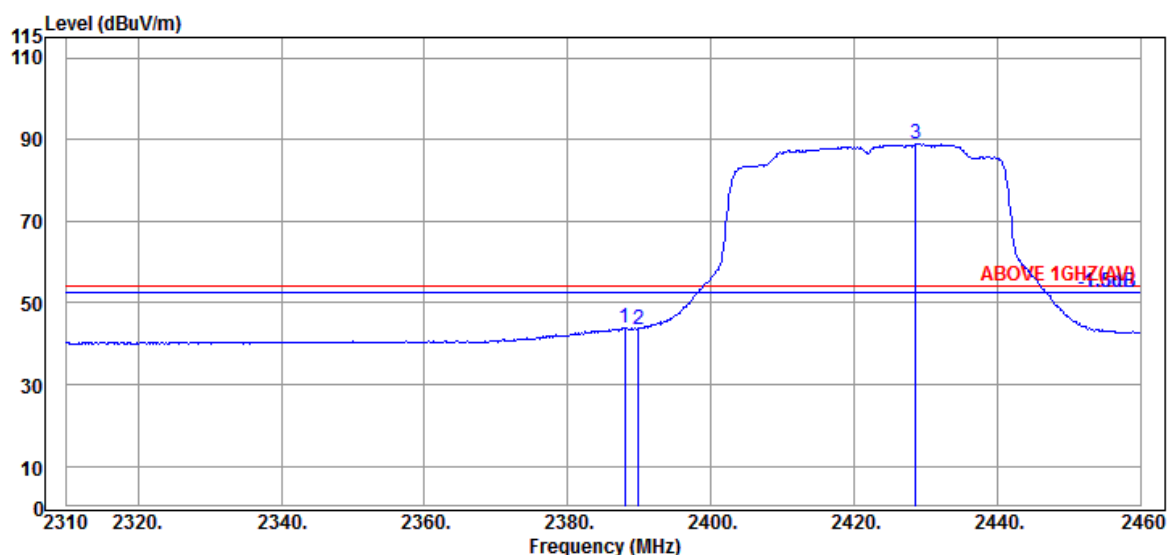

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	31.89	6.04	34.53	40.51	43.91	54.00	10.09	Average
2389.950	31.89	6.04	34.54	40.21	43.60	54.00	10.40	Average
@ 2428.650	32.09	6.10	34.54	85.17	88.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

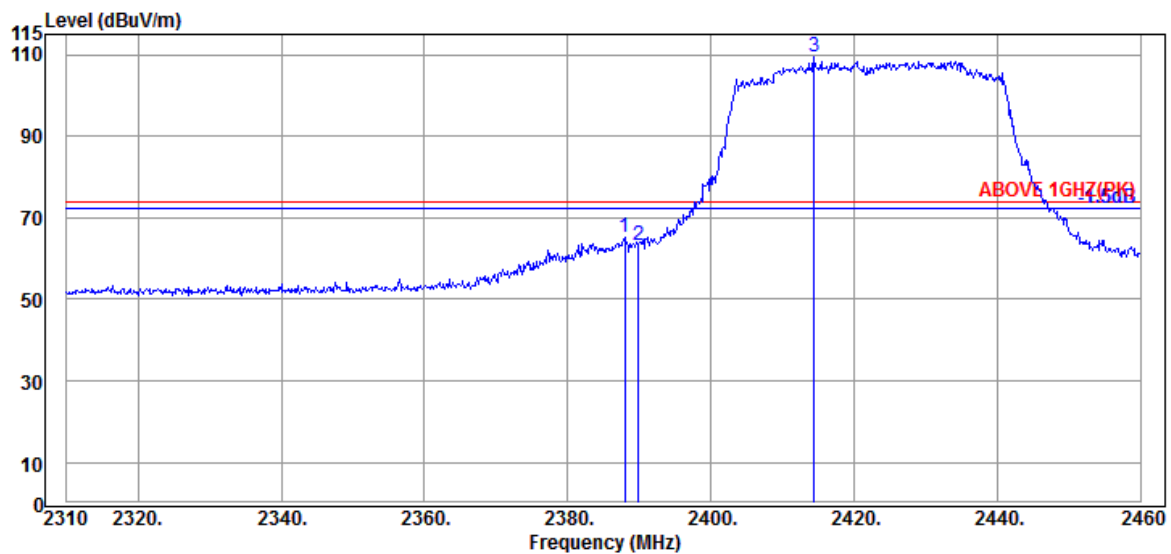

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	31.89	6.04	34.53	61.88	65.28	74.00	8.72	Peak
2389.950	31.89	6.04	34.54	60.00	63.39	74.00	10.61	Peak
@ 2414.400	31.94	6.07	34.54	105.94	109.41	---	---	Peak

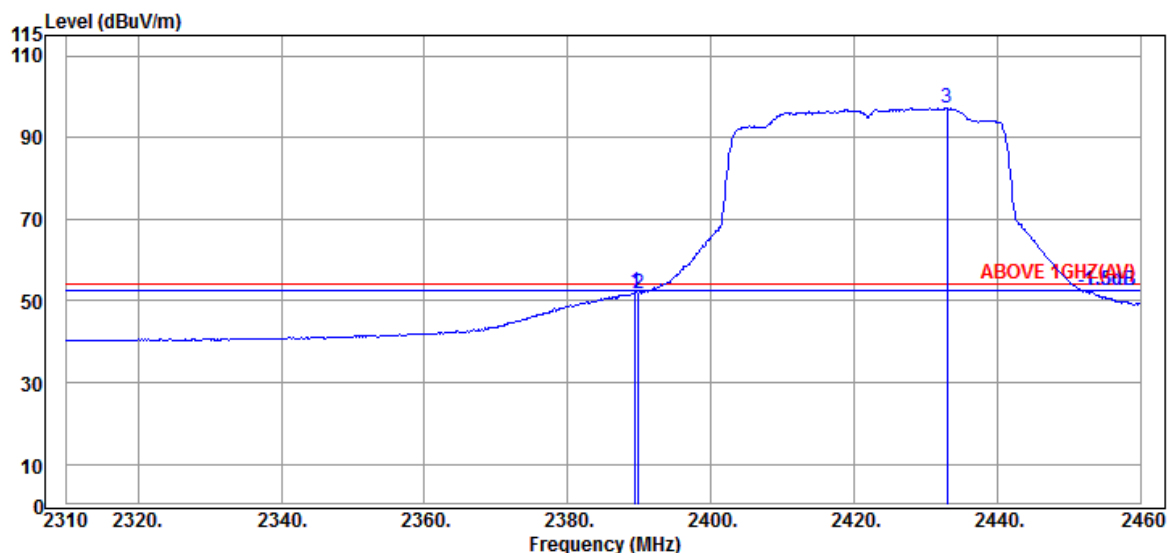

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	48.72	52.12	54.00	1.88	Average
2389.950	31.89	6.04	34.54	48.52	51.91	54.00	2.09	Average
@ 2433.000	32.16	6.10	34.54	93.45	97.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

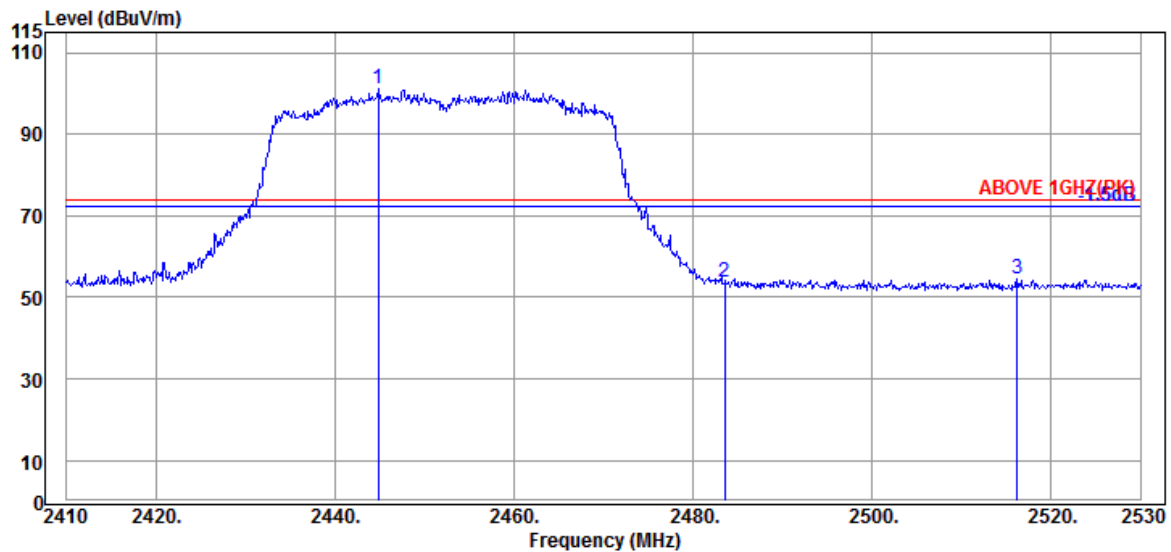

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.800	32.23	6.13	34.55	97.18	100.99	---	---	Peak
2483.560	32.30	6.18	34.55	49.64	53.57	74.00	20.43	Peak
2516.200	32.36	6.23	34.56	50.67	54.70	74.00	19.30	Peak

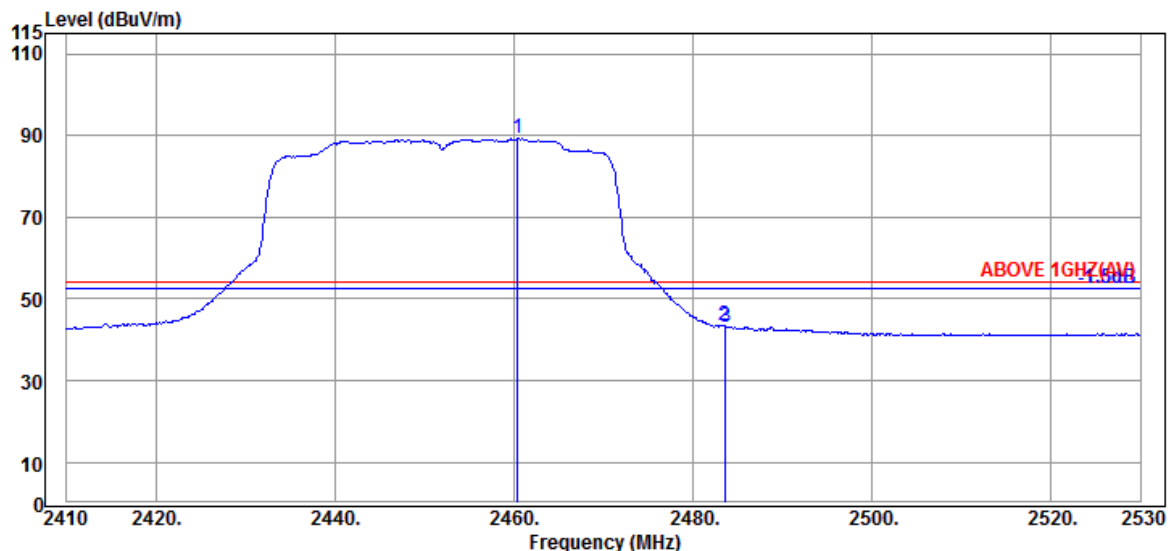

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	32.30	6.15	34.55	85.35	89.25	---	---	Average
2483.560	32.30	6.18	34.55	39.43	43.36	54.00	10.64	Average
2483.680	32.30	6.18	34.55	39.20	43.13	54.00	10.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

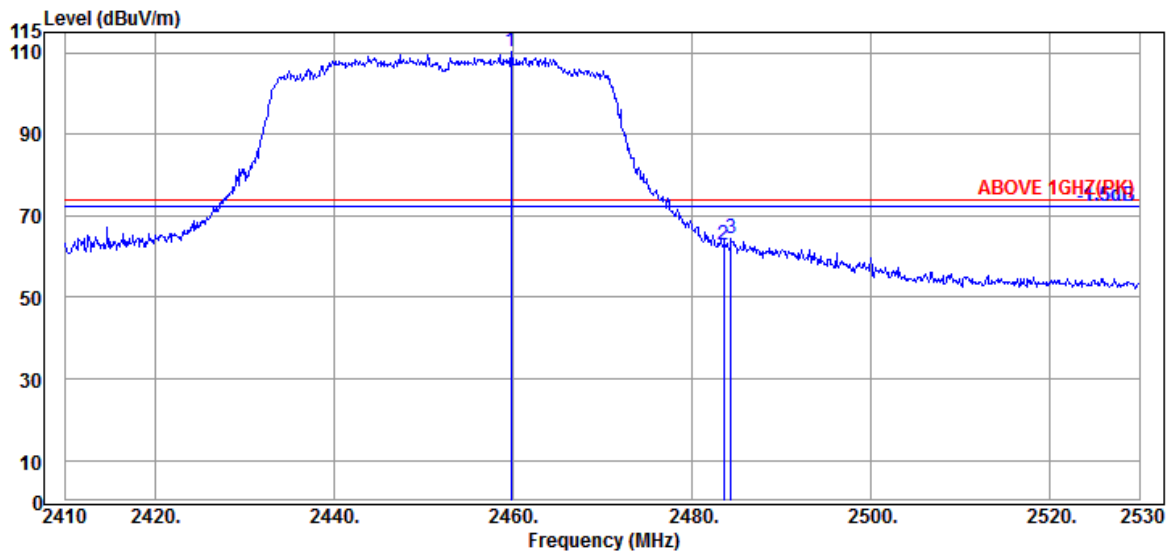

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	32.30	6.15	34.55	106.39	110.29	---	---	Peak
2483.560	32.30	6.18	34.55	58.88	62.81	74.00	11.19	Peak
2484.400	32.30	6.18	34.55	60.48	64.41	74.00	9.59	Peak

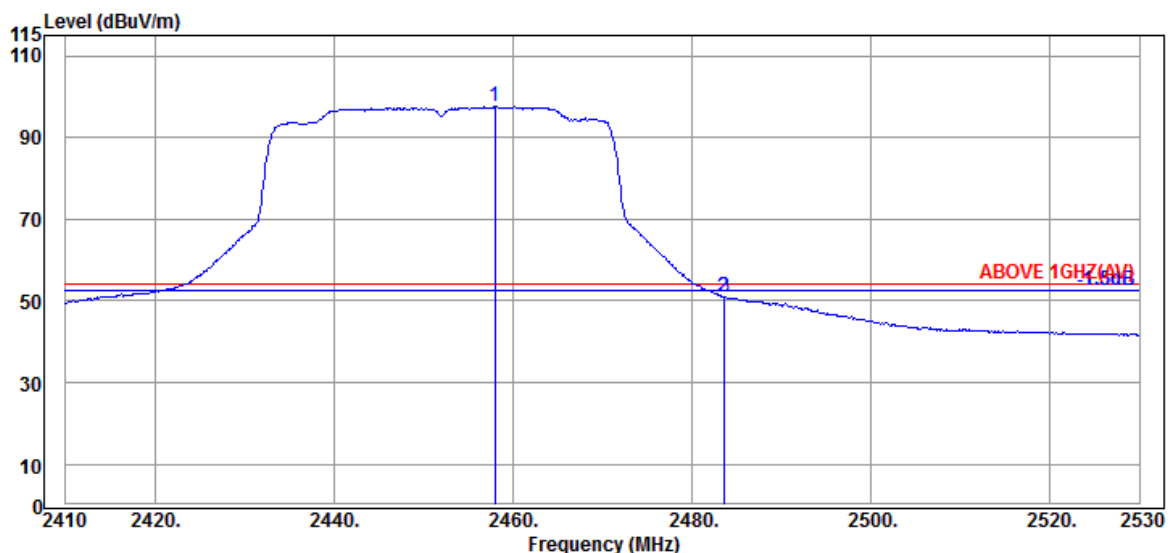

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	32.30	6.15	34.55	93.70	97.60	---	---	Average
2483.560	32.30	6.18	34.55	46.91	50.84	54.00	3.16	Average
2483.680	32.30	6.18	34.55	46.93	50.86	54.00	3.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

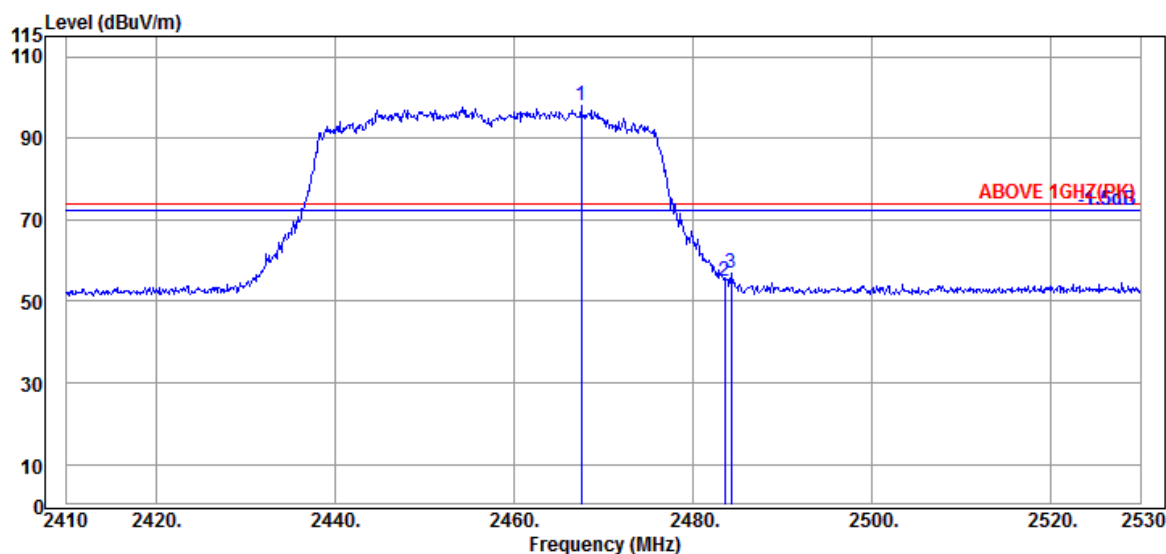

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.480	32.30	6.15	34.55	93.98	97.88	---	---	Peak
2483.560	32.30	6.18	34.55	50.95	54.88	74.00	19.12	Peak
2484.280	32.30	6.18	34.55	52.96	56.89	74.00	17.11	Peak

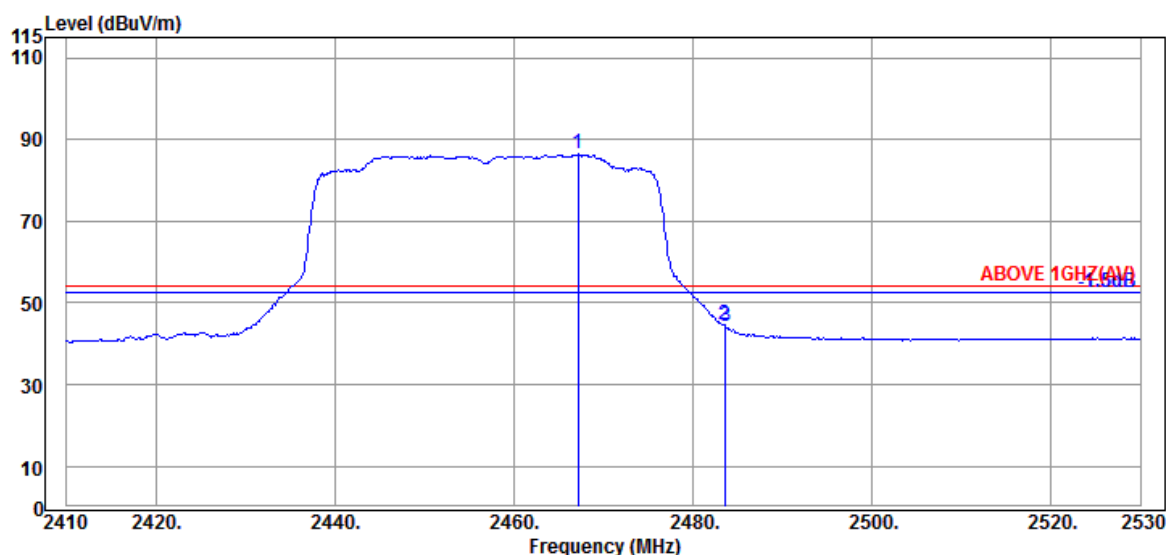


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.120	32.30	6.15	34.55	82.47	86.37	---	---	Average
2483.560	32.30	6.18	34.55	40.80	44.73	54.00	9.27	Average
2483.680	32.30	6.18	34.55	40.34	44.27	54.00	9.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

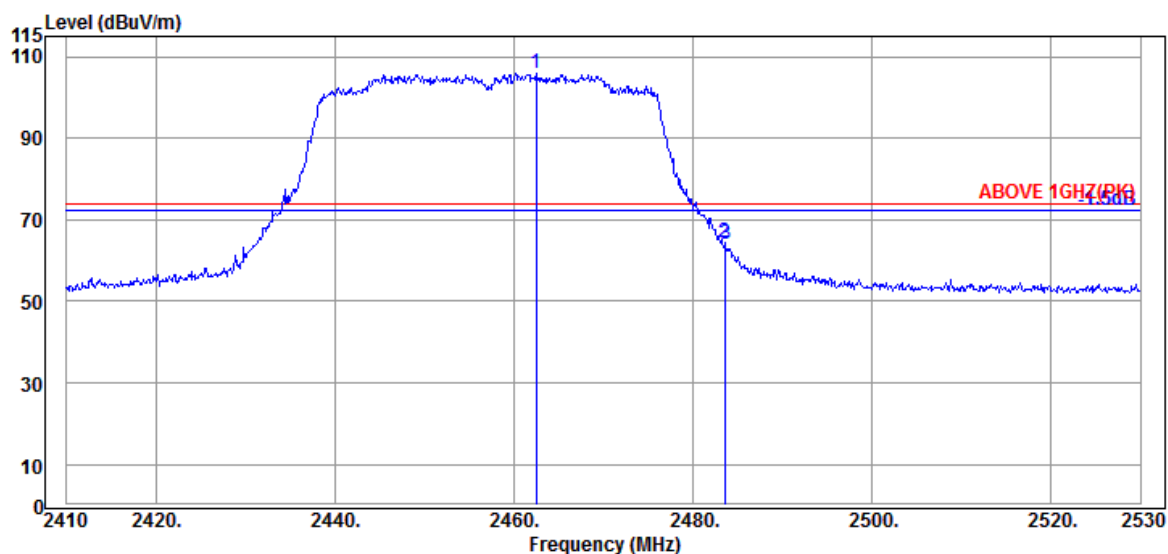

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.440	32.30	6.15	34.55	102.17	106.07	---	---	Peak
2483.560	32.30	6.18	34.55	60.57	64.50	74.00	9.50	Peak
2483.680	32.30	6.18	34.55	59.99	63.92	74.00	10.08	Peak

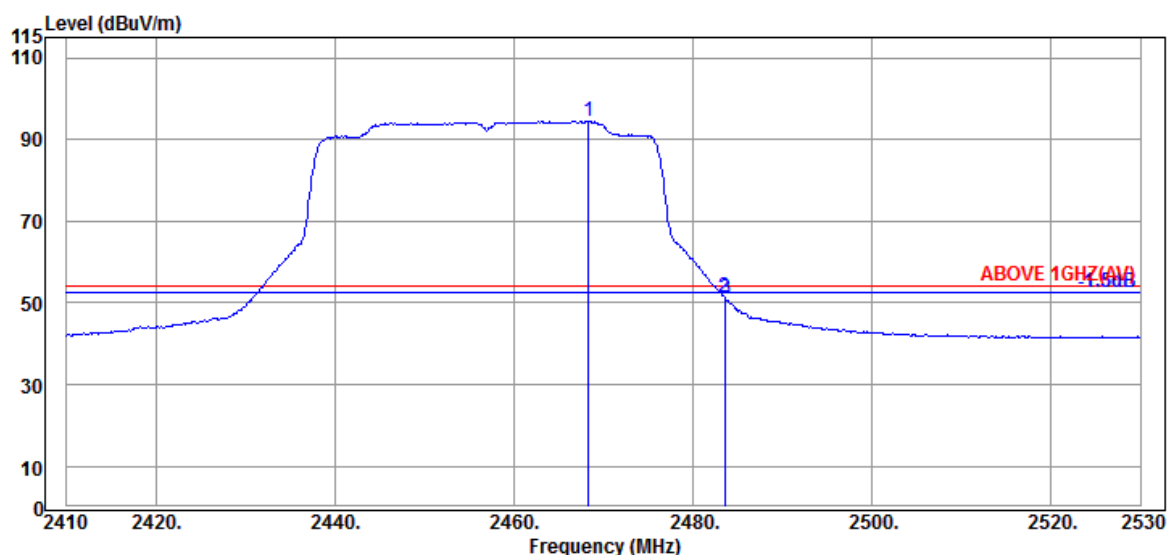

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.320	32.30	6.15	34.55	90.55	94.45	---	---	Average
2483.560	32.30	6.18	34.55	47.46	51.39	54.00	2.61	Average
2483.680	32.30	6.18	34.55	47.07	51.00	54.00	3.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

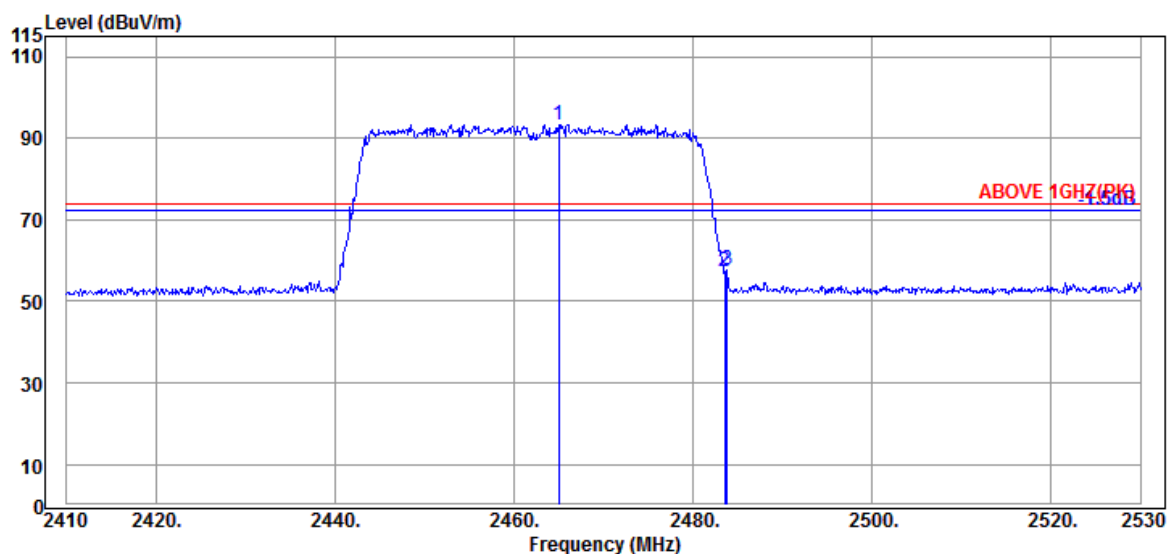

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.960	32.30	6.15	34.55	89.51	93.41	---	---	Peak
2483.560	32.30	6.18	34.55	53.52	57.45	74.00	16.55	Peak
2483.800	32.30	6.18	34.55	53.75	57.68	74.00	16.32	Peak

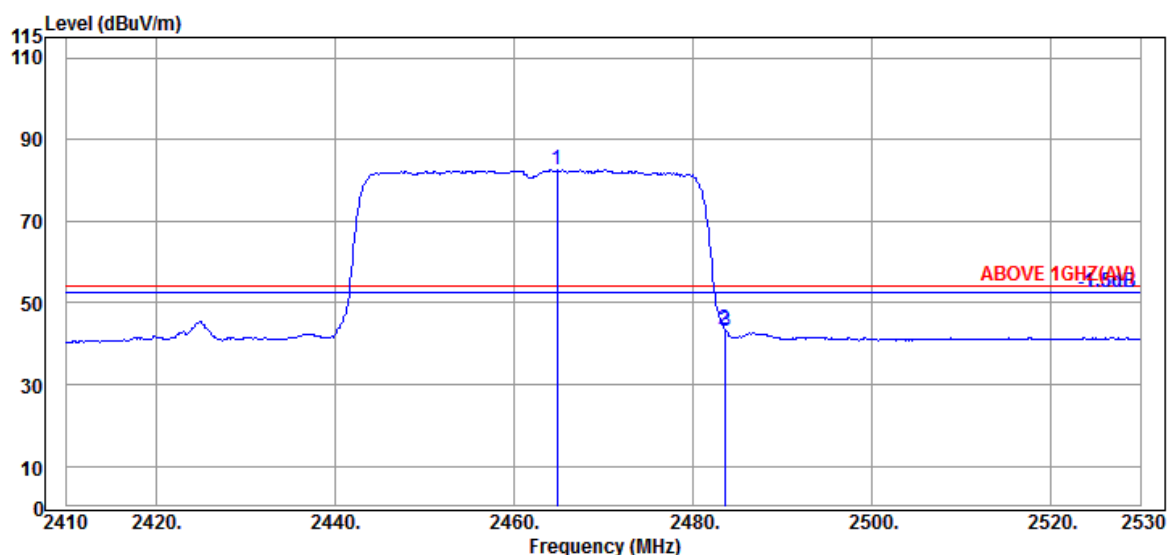

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.840	32.30	6.15	34.55	78.78	82.68	---	---	Average
2483.560	32.30	6.18	34.55	39.73	43.66	54.00	10.34	Average
2483.680	32.30	6.18	34.55	39.32	43.25	54.00	10.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

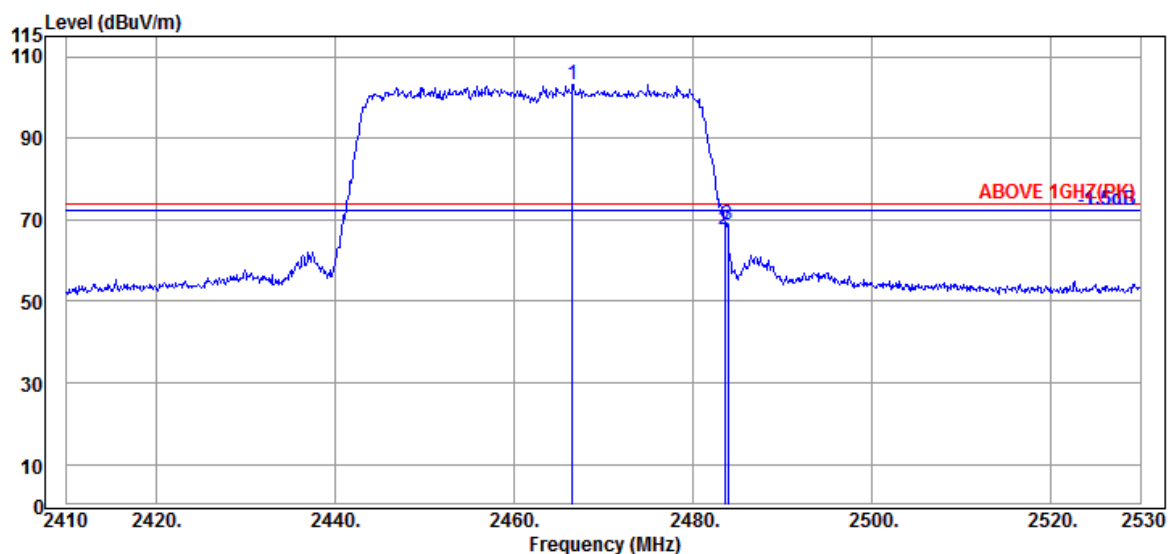

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.520	32.30	6.15	34.55	99.39	103.29	---	---	Peak
2483.560	32.30	6.18	34.55	63.63	67.56	74.00	6.44	Peak
2483.920	32.30	6.18	34.55	64.94	68.87	74.00	5.13	Peak

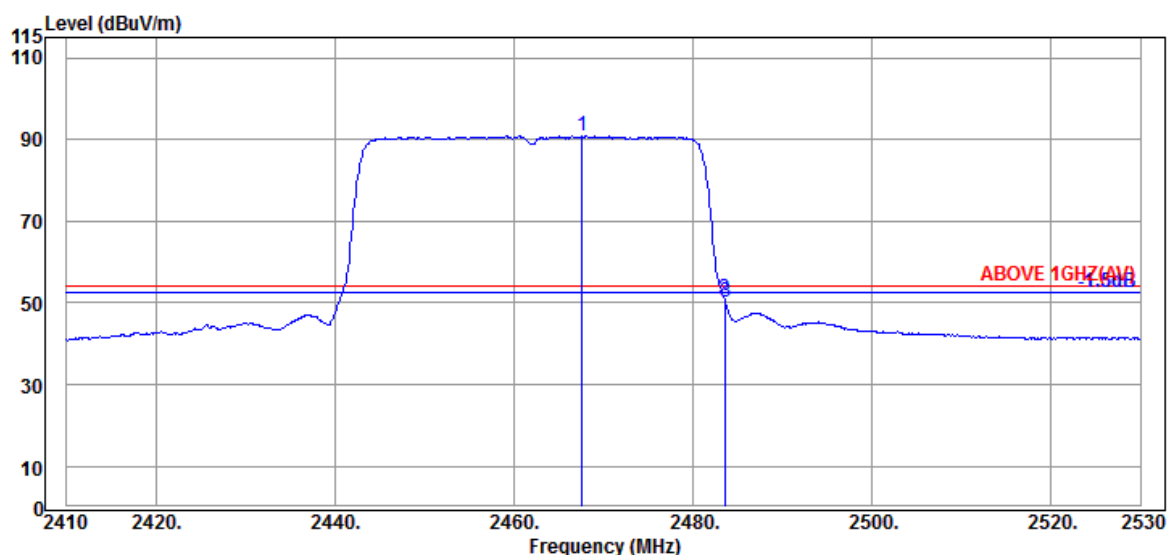

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	32.30	6.15	34.55	86.91	90.81	---	---	Average
2483.560	32.30	6.18	34.55	47.03	50.96	54.00	3.04	Average
2483.680	32.30	6.18	34.55	46.14	50.07	54.00	3.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

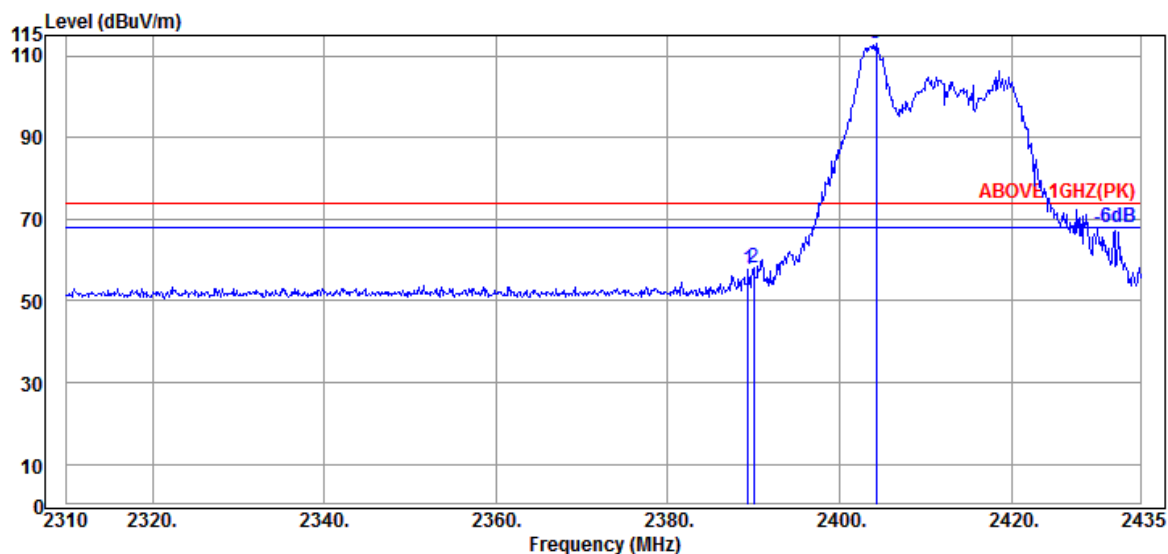

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	54.36	57.76	74.00	16.24	Peak
2390.000	31.89	6.04	34.54	54.55	57.94	74.00	16.06	Peak
@ 2404.250	31.87	6.07	34.54	109.54	112.94	---	---	Peak

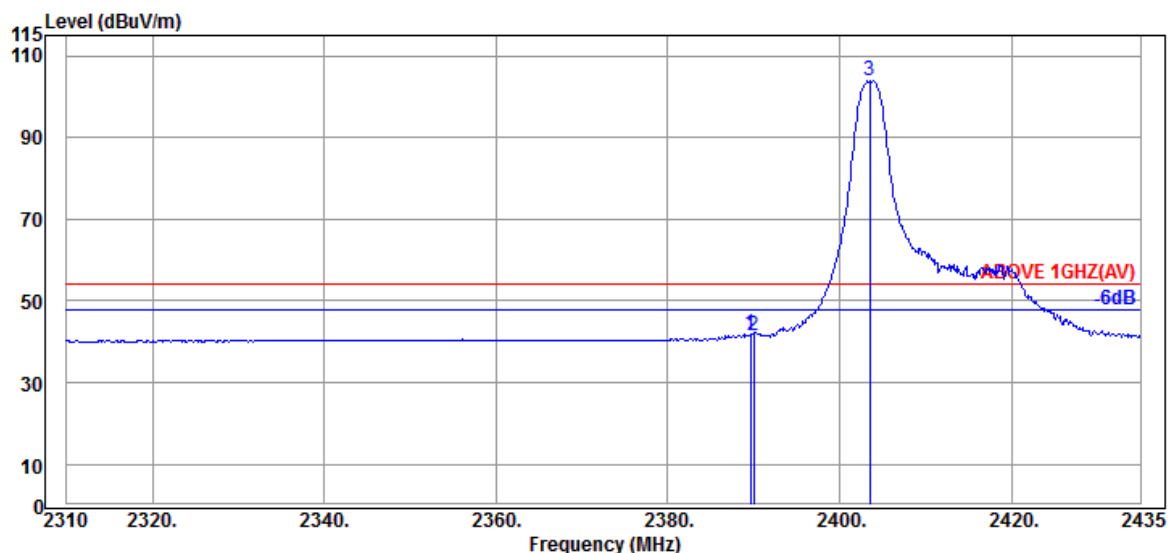

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	38.59	41.99	54.00	12.01	Average
2390.000	31.89	6.04	34.54	38.19	41.58	54.00	12.42	Average
@ 2403.500	31.80	6.07	34.54	100.52	103.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239


Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

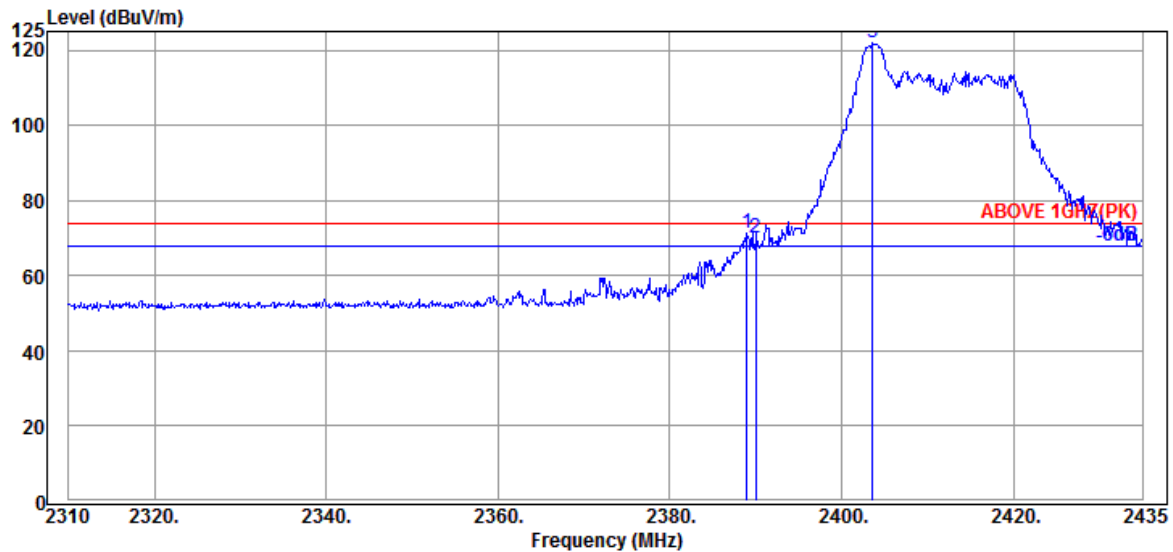

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.000	31.89	6.04	34.53	68.00	71.40	74.00	2.60	Peak
2390.000	31.89	6.04	34.54	66.67	70.06	74.00	3.94	Peak
@ 2403.625	31.80	6.07	34.54	118.53	121.86	---	---	Peak

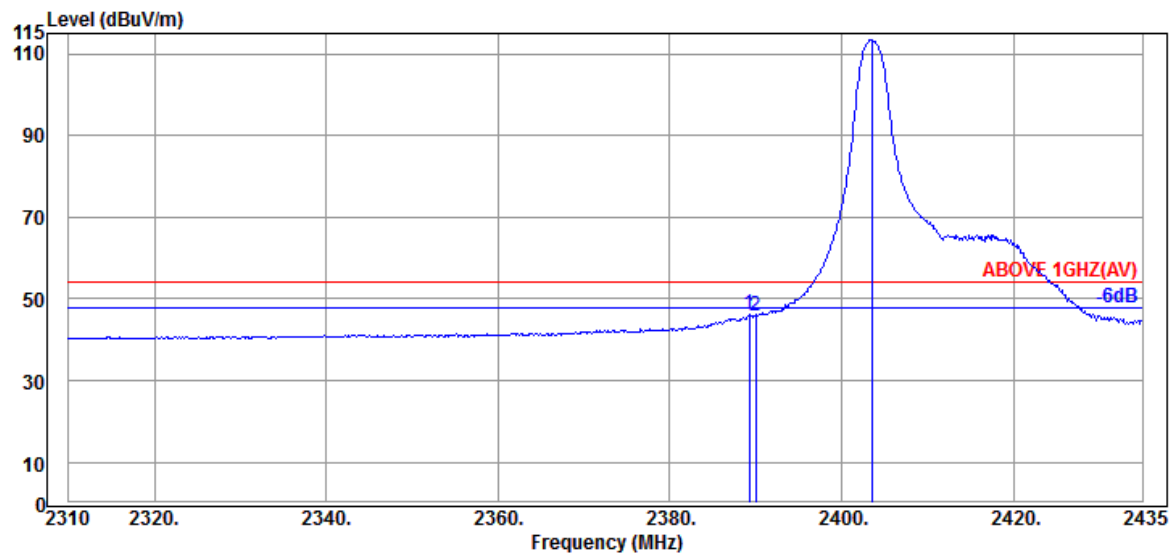

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	31.89	6.04	34.53	42.81	46.21	54.00	7.79	Average
2390.000	31.89	6.04	34.54	42.45	45.84	54.00	8.16	Average
@ 2403.625	31.80	6.07	34.54	110.17	113.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

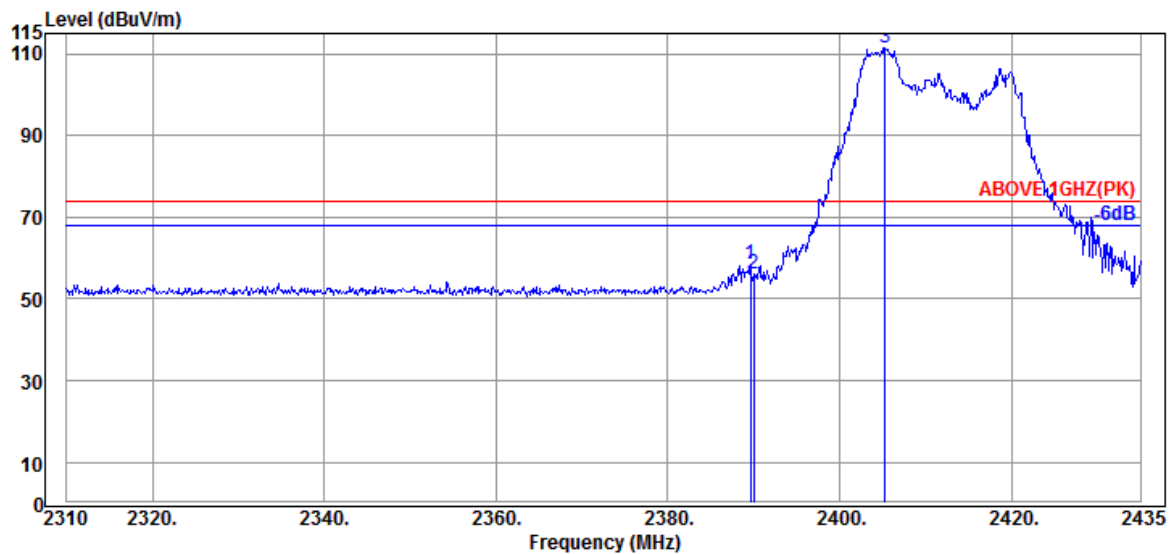

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	55.04	58.44	74.00	15.56	Peak
2390.000	31.89	6.04	34.54	52.59	55.98	74.00	18.02	Peak
@ 2405.250	31.87	6.07	34.54	108.22	111.62	---	---	Peak

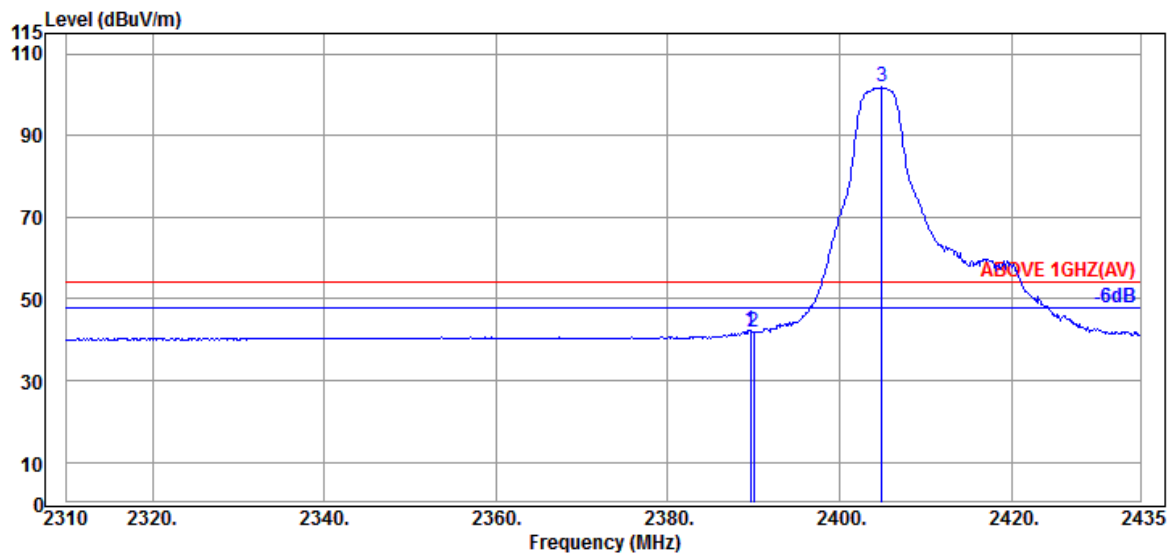

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	38.84	42.24	54.00	11.76	Average
2390.000	31.89	6.04	34.54	38.51	41.90	54.00	12.10	Average
@ 2404.875	31.87	6.07	34.54	98.45	101.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

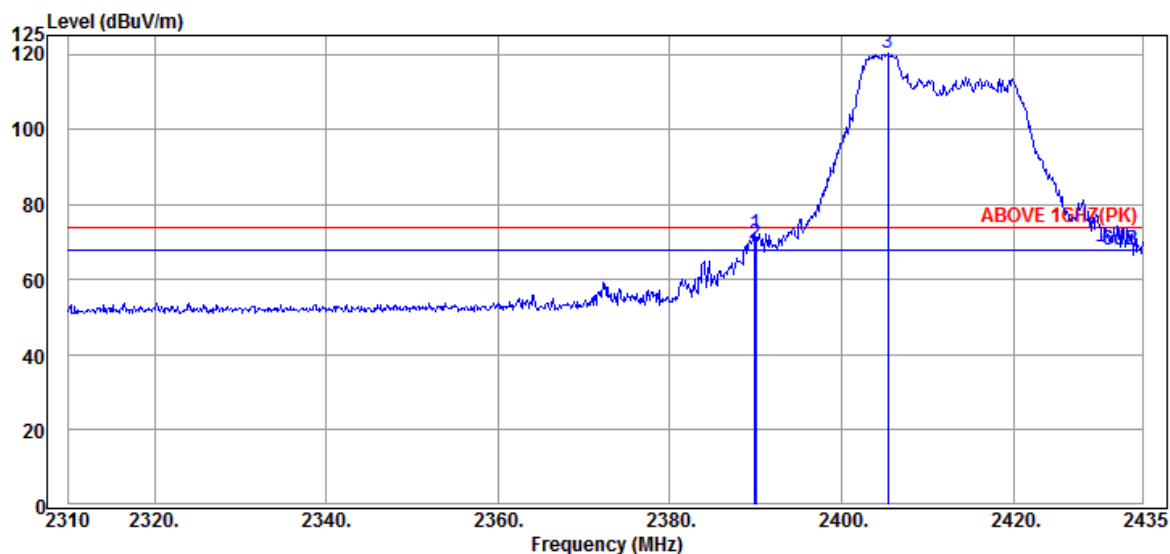

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.875	31.89	6.04	34.54	68.58	71.97	74.00	2.03	Peak
2390.000	31.89	6.04	34.54	66.10	69.49	74.00	4.51	Peak
@ 2405.375	31.87	6.07	34.54	116.76	120.16	---	---	Peak

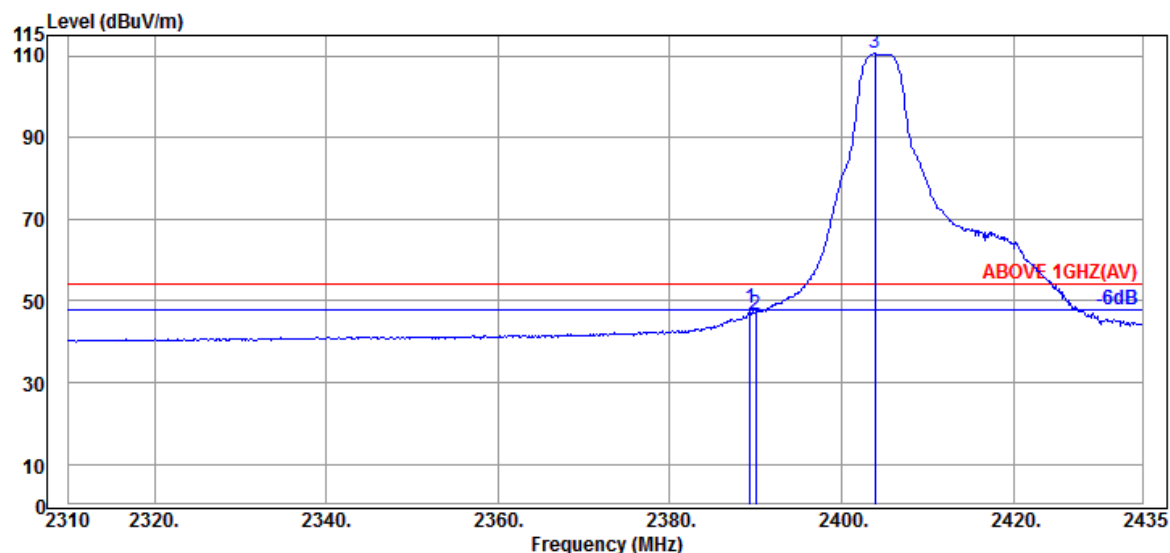

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	31.89	6.04	34.53	44.66	48.06	54.00	5.94	Average
2390.000	31.89	6.04	34.54	43.40	46.79	54.00	7.21	Average
@ 2403.875	31.80	6.07	34.54	107.27	110.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

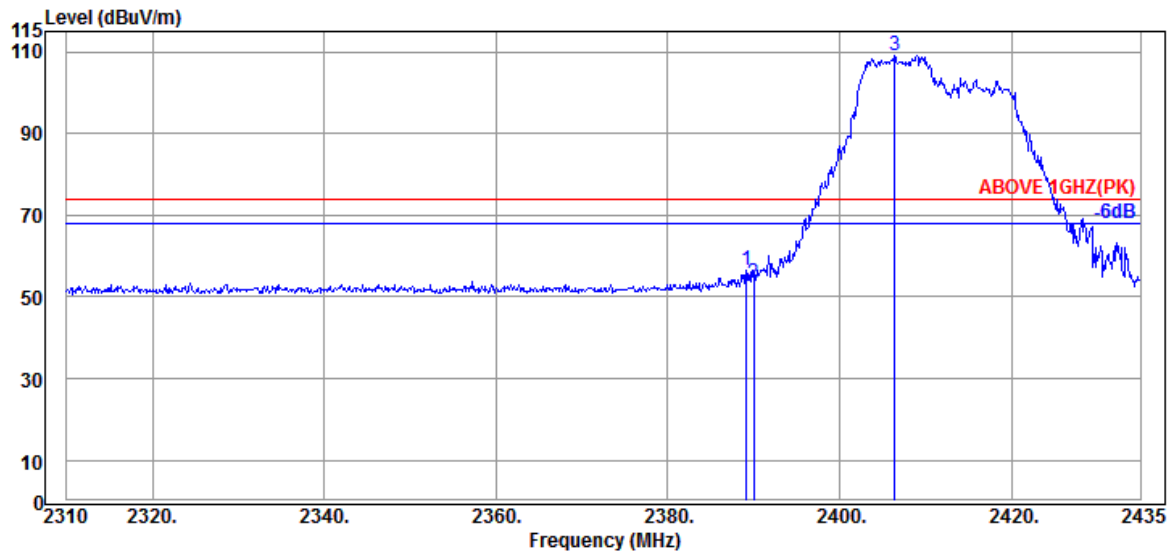

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.125	31.89	6.04	34.53	53.02	56.42	74.00	17.58	Peak
2390.000	31.89	6.04	34.54	49.86	53.25	74.00	20.75	Peak
@ 2406.375	31.87	6.07	34.54	105.76	109.16	---	---	Peak

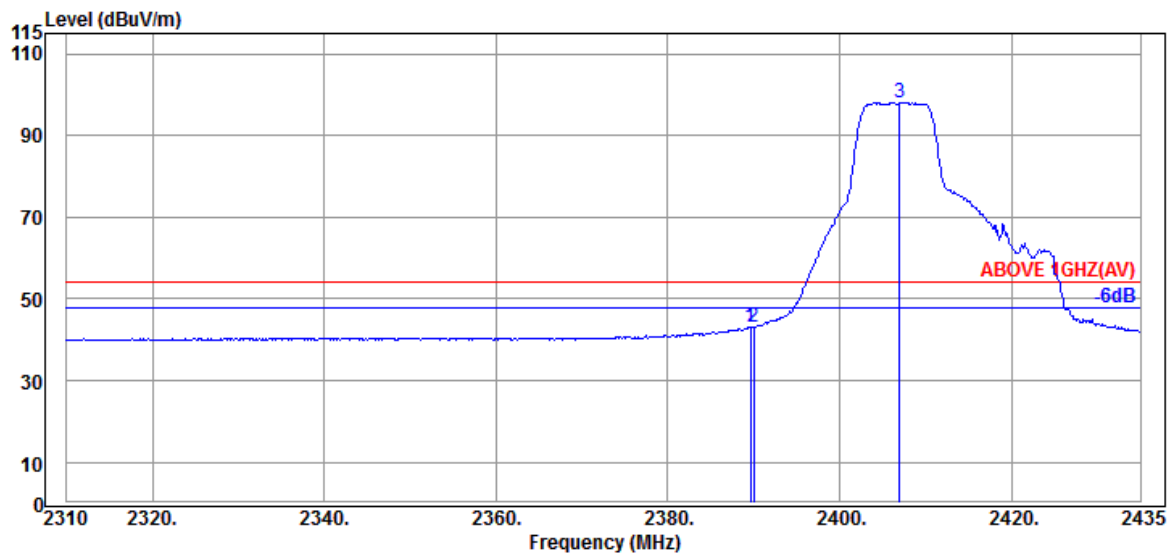

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	39.58	42.98	54.00	11.02	Average
2390.000	31.89	6.04	34.54	39.67	43.06	54.00	10.94	Average
@ 2407.000	31.87	6.07	34.54	94.76	98.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

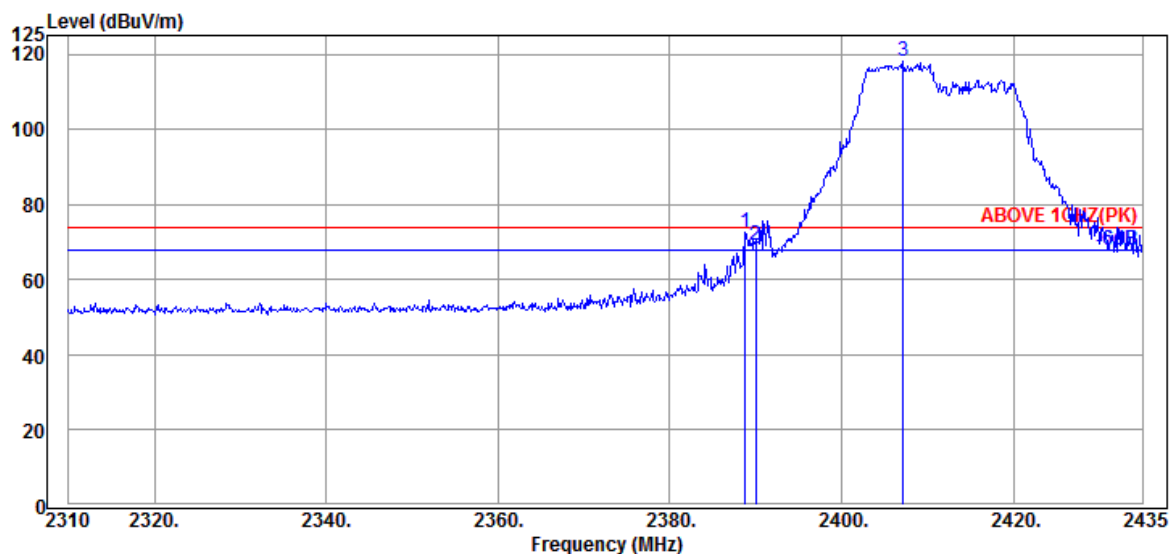

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	31.89	6.04	34.53	69.04	72.44	74.00	1.56	Peak
2390.000	31.89	6.04	34.54	65.94	69.33	74.00	4.67	Peak
@ 2407.125	31.87	6.07	34.54	114.60	118.00	---	---	Peak

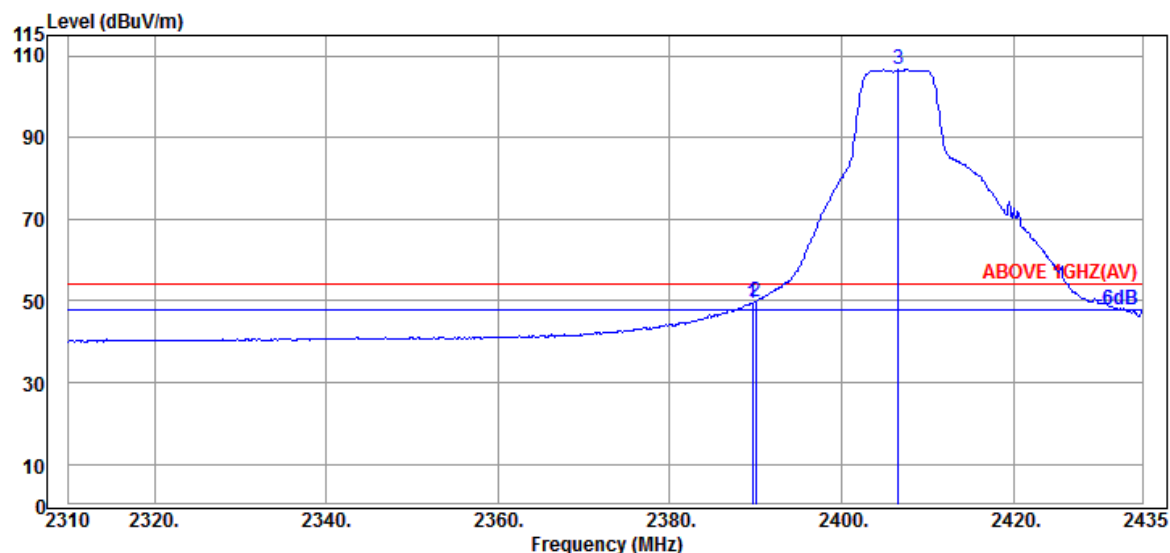

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	31.89	6.04	34.53	46.12	49.52	54.00	4.48	Average
2390.000	31.89	6.04	34.54	46.42	49.81	54.00	4.19	Average
@ 2406.625	31.87	6.07	34.54	103.16	106.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

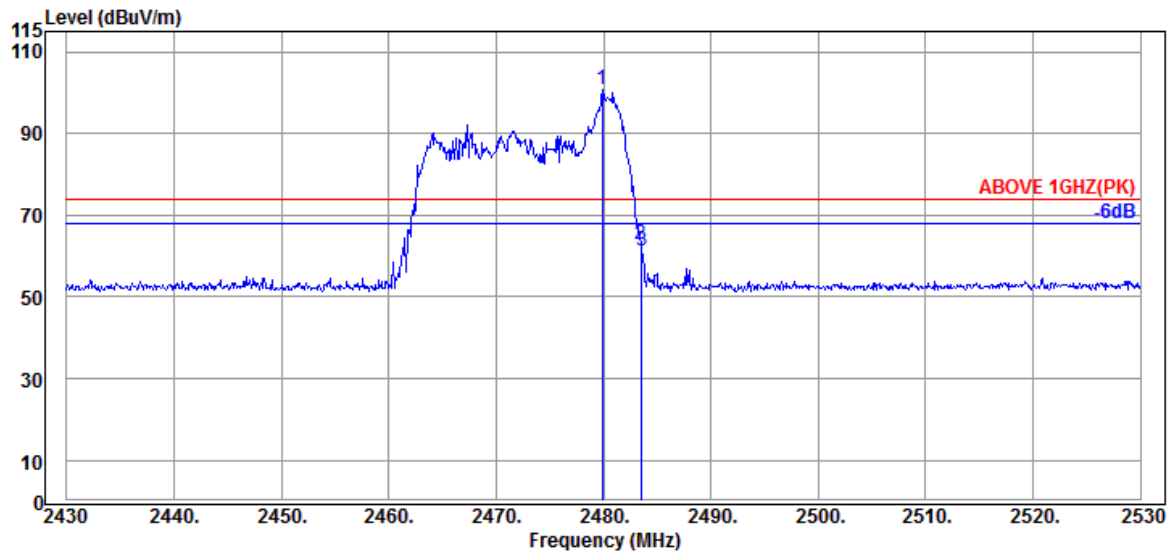

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.900	32.30	6.18	34.55	96.91	100.84	---	---	Peak
2483.500	32.30	6.18	34.55	59.05	62.98	74.00	11.02	Peak
2483.600	32.30	6.18	34.55	57.28	61.21	74.00	12.79	Peak

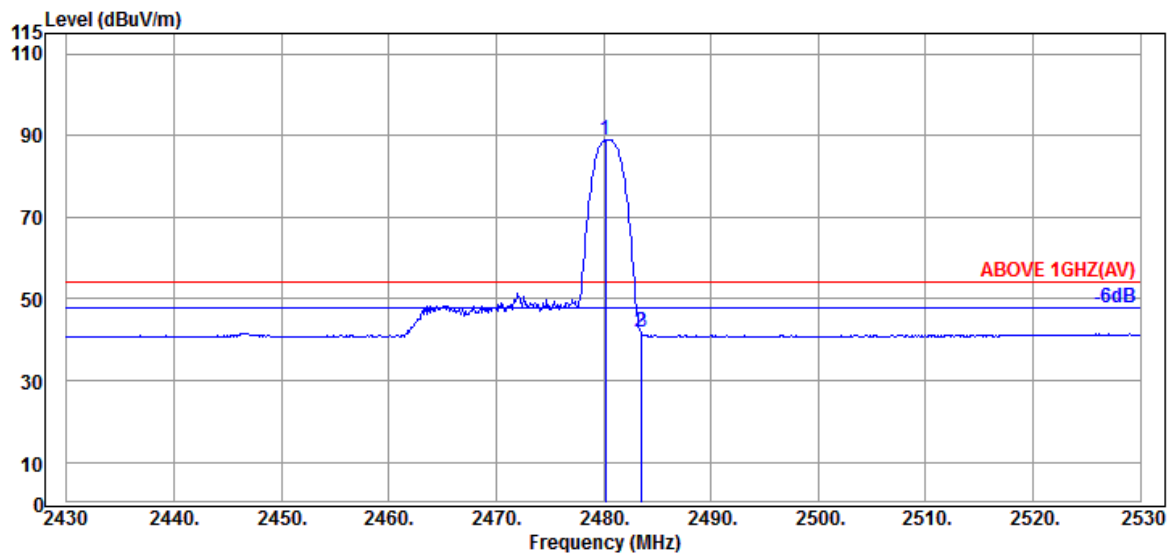

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.200	32.30	6.18	34.55	85.04	88.97	---	---	Average
2483.500	32.30	6.18	34.55	38.15	42.08	54.00	11.92	Average
2483.600	32.30	6.18	34.55	37.92	41.85	54.00	12.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

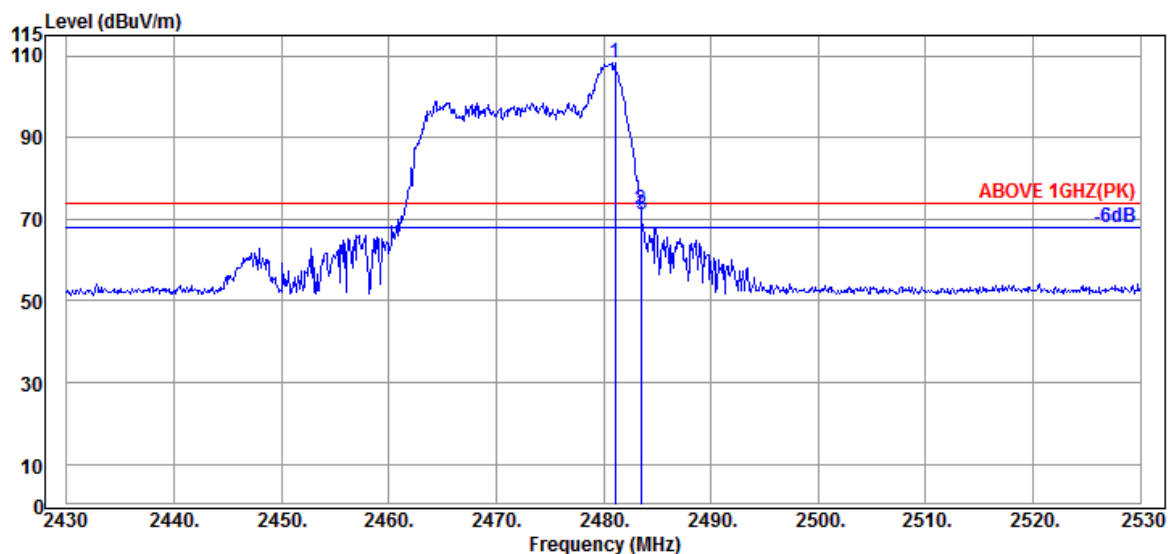

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.100	32.30	6.18	34.55	104.45	108.38	---	---	Peak
2483.500	32.30	6.18	34.55	68.20	72.13	74.00	1.87	Peak
2483.600	32.30	6.18	34.55	67.04	70.97	74.00	3.03	Peak

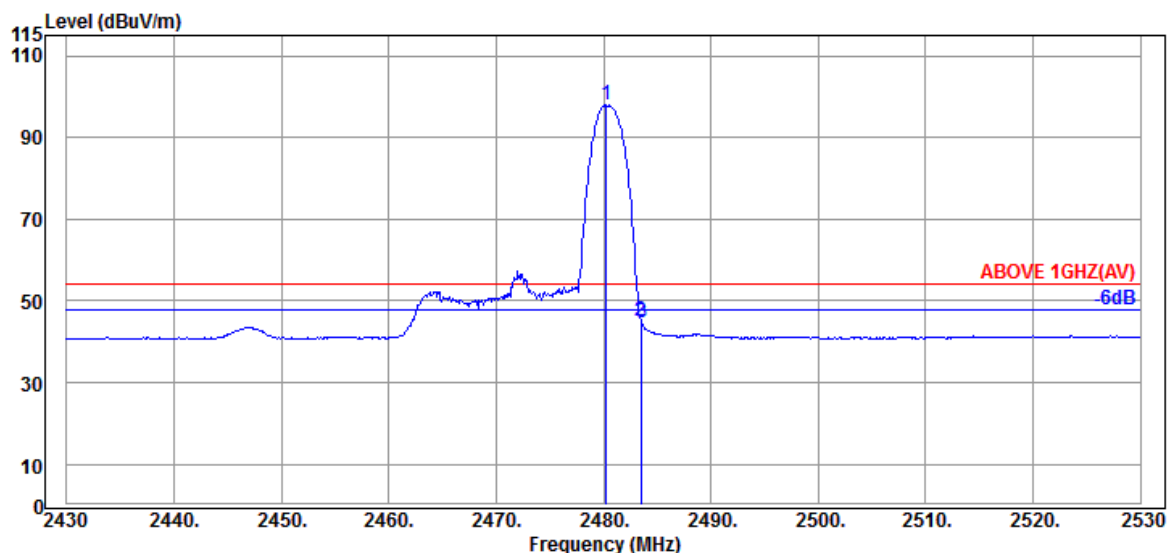

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	32.30	6.18	34.55	94.13	98.06	---	---	Average
2483.500	32.30	6.18	34.55	41.19	45.12	54.00	8.88	Average
2483.600	32.30	6.18	34.55	40.55	44.48	54.00	9.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239


Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

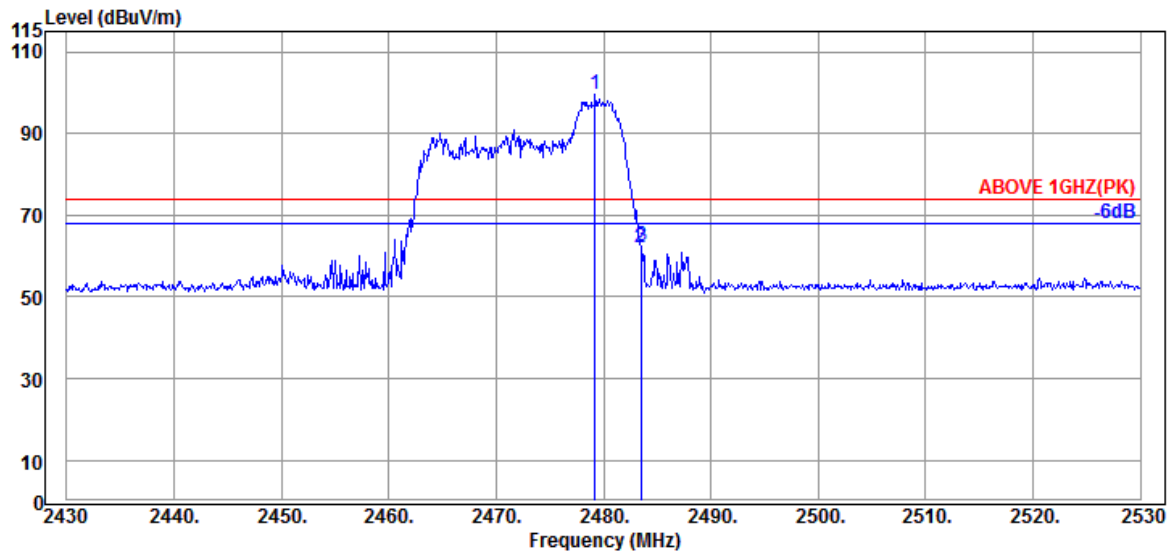

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	32.30	6.18	34.55	95.50	99.43	---	---	Peak
2483.500	32.30	6.18	34.55	58.29	62.22	74.00	11.78	Peak
2483.600	32.30	6.18	34.55	58.64	62.57	74.00	11.43	Peak

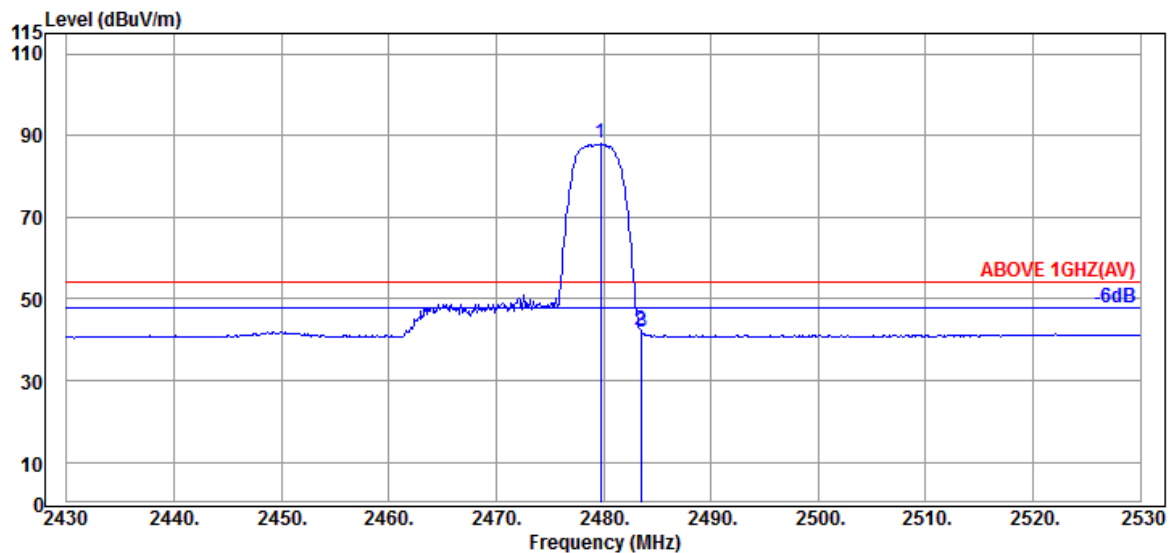

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	32.30	6.18	34.55	84.11	88.04	---	---	Average
2483.500	32.30	6.18	34.55	38.25	42.18	54.00	11.82	Average
2483.600	32.30	6.18	34.55	37.82	41.75	54.00	12.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

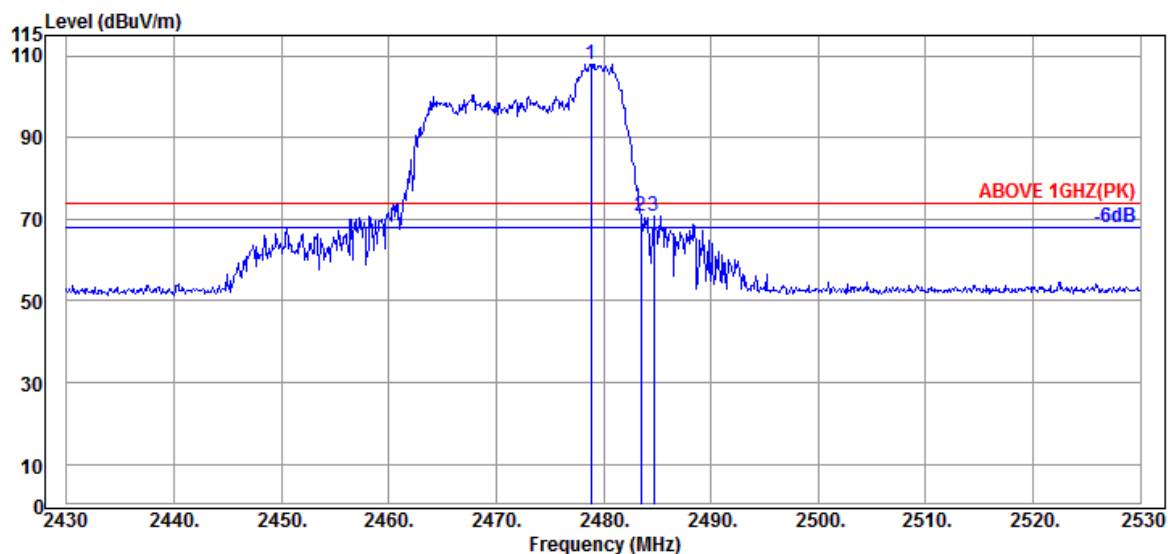

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	32.30	6.18	34.55	104.07	108.00	---	---	Peak
2483.500	32.30	6.18	34.55	66.75	70.68	74.00	3.32	Peak
2484.700	32.30	6.18	34.55	66.90	70.83	74.00	3.17	Peak

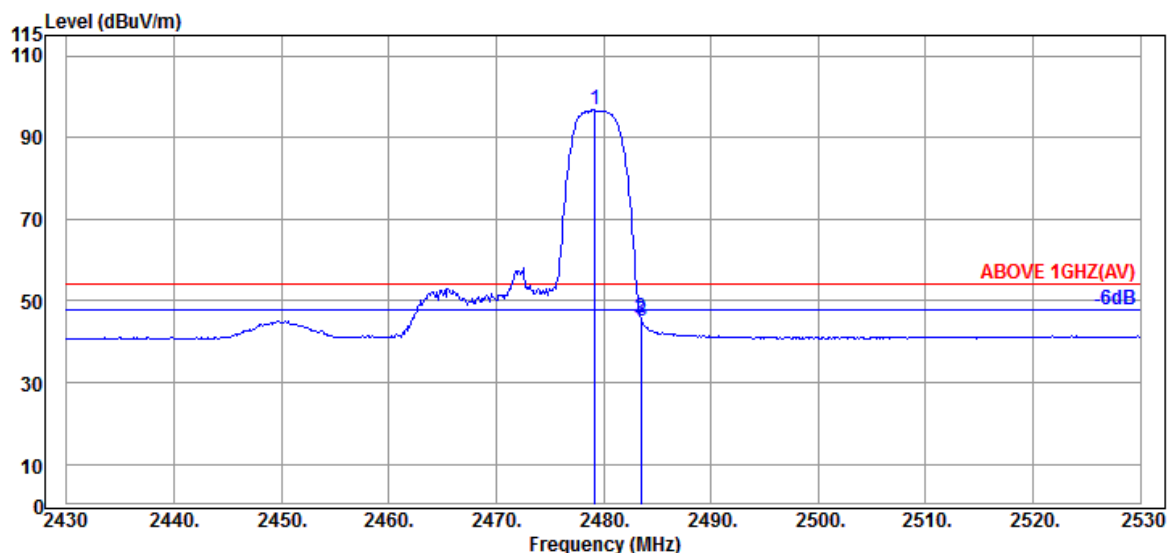

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	32.30	6.18	34.55	92.79	96.72	---	---	Average
2483.500	32.30	6.18	34.55	41.78	45.71	54.00	8.29	Average
2483.600	32.30	6.18	34.55	41.15	45.08	54.00	8.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

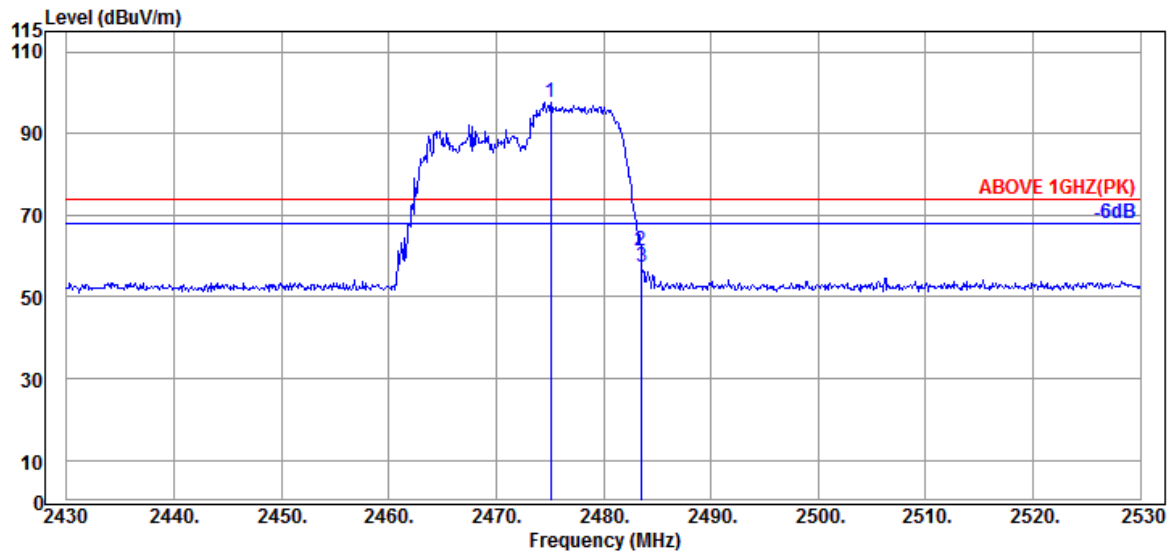

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.100	32.30	6.18	34.55	93.84	97.77	---	---	Peak
2483.500	32.30	6.18	34.55	57.26	61.19	74.00	12.81	Peak
2483.600	32.30	6.18	34.55	53.26	57.19	74.00	16.81	Peak

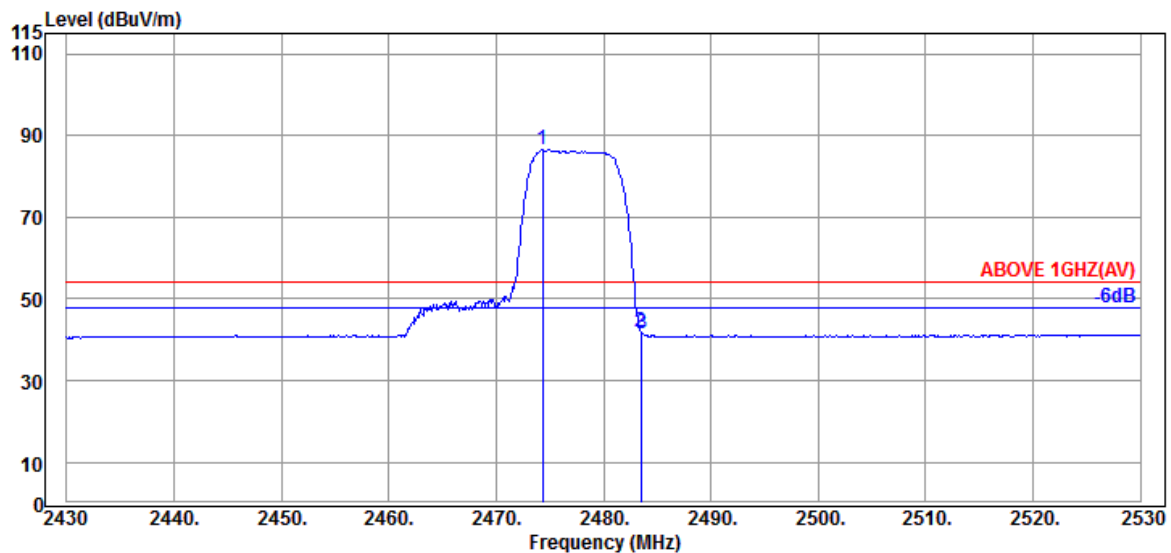

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.300	32.30	6.18	34.55	82.50	86.43	---	---	Average
2483.500	32.30	6.18	34.55	38.14	42.07	54.00	11.93	Average
2483.600	32.30	6.18	34.55	37.74	41.67	54.00	12.33	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239


Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

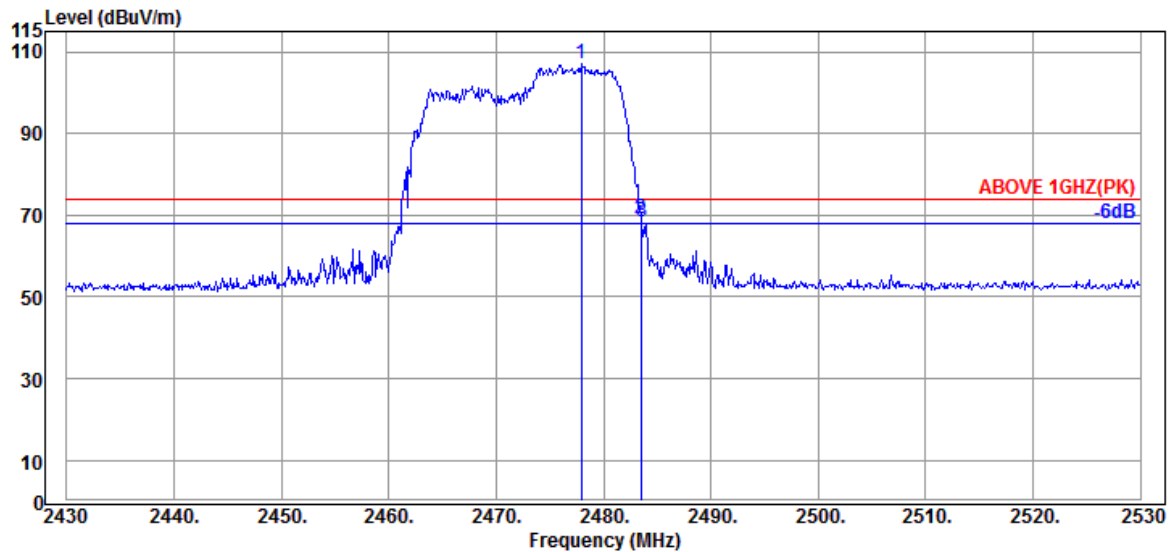

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.900	32.30	6.18	34.55	103.01	106.94	---	---	Peak
2483.500	32.30	6.18	34.55	65.08	69.01	74.00	4.99	Peak
2483.600	32.30	6.18	34.55	64.32	68.25	74.00	5.75	Peak

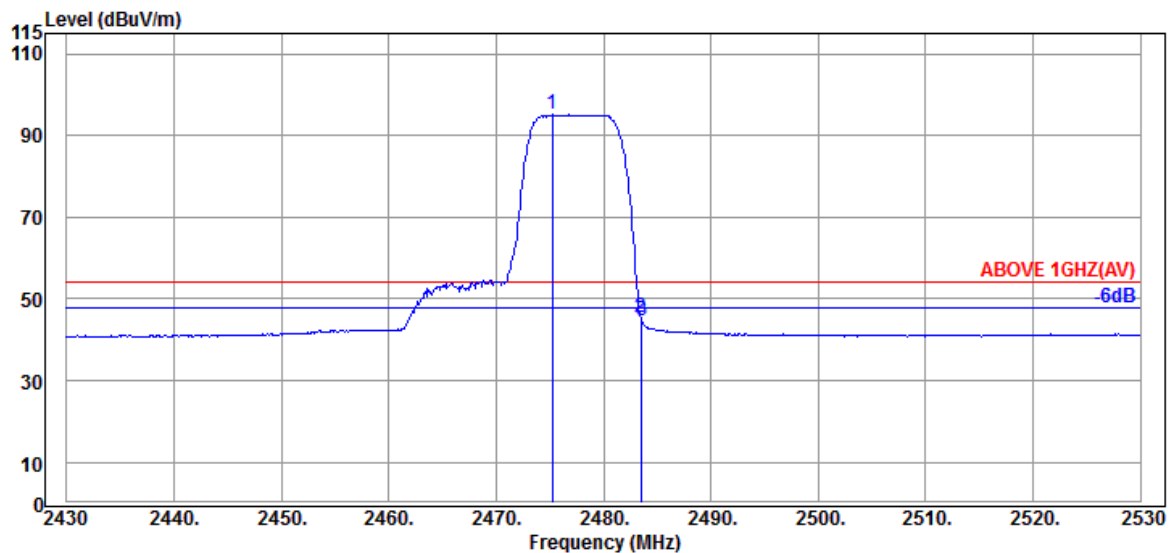

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.200	32.30	6.18	34.55	91.26	95.19	---	---	Average
2483.500	32.30	6.18	34.55	41.56	45.49	54.00	8.51	Average
2483.600	32.30	6.18	34.55	40.76	44.69	54.00	9.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

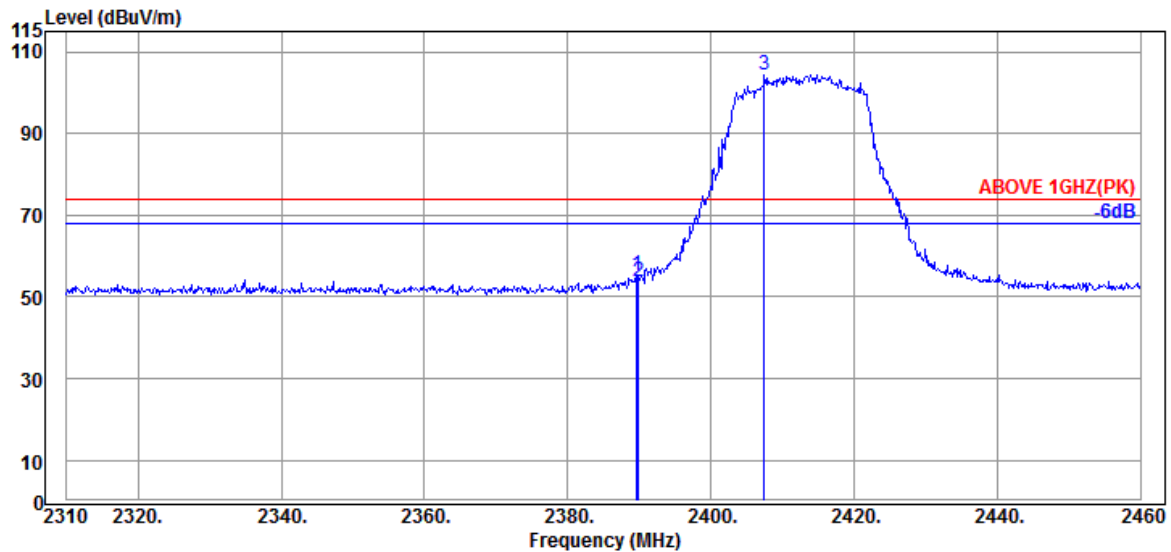

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	6.04	34.53	52.08	55.48	74.00	18.52	Peak
2389.950	31.89	6.04	34.54	50.23	53.62	74.00	20.38	Peak
@ 2407.500	31.87	6.07	34.54	101.10	104.50	---	---	Peak

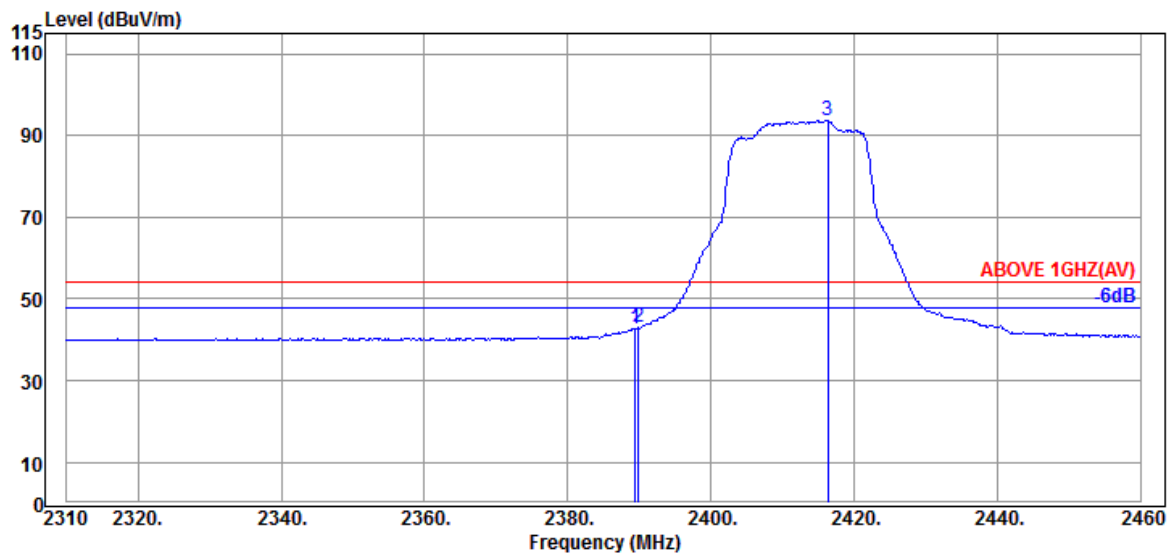

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	6.04	34.53	39.40	42.80	54.00	11.20	Average
2389.950	31.89	6.04	34.54	39.71	43.10	54.00	10.90	Average
@ 2416.350	31.94	6.07	34.54	90.09	93.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

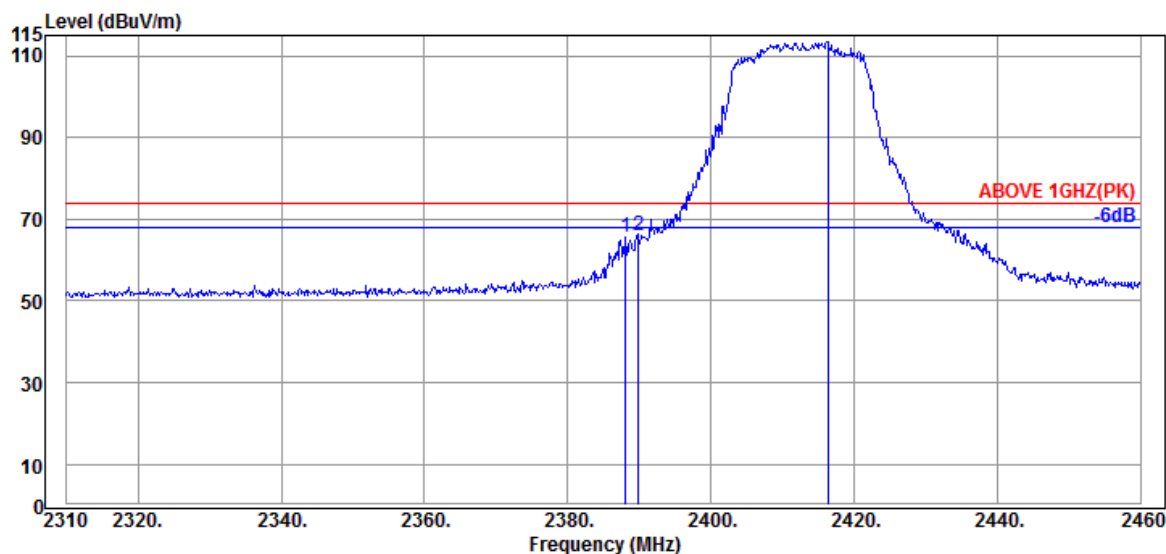

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.150	31.89	6.04	34.53	62.32	65.72	74.00	8.28	Peak
2389.950	31.89	6.04	34.54	62.43	65.82	74.00	8.18	Peak
@ 2416.350	31.94	6.07	34.54	110.06	113.53	---	---	Peak

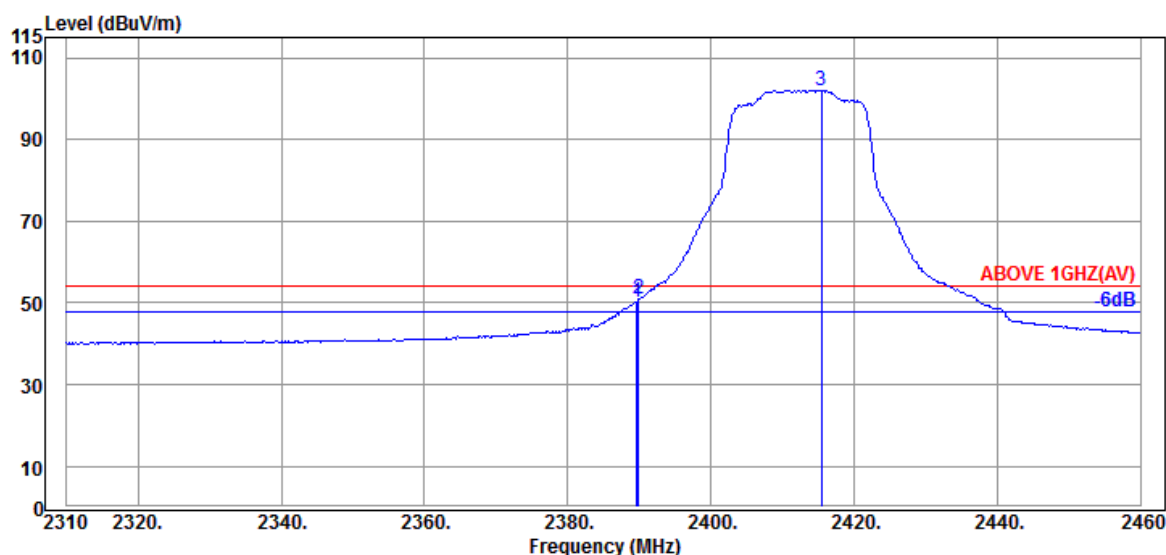

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	6.04	34.53	46.88	50.28	54.00	3.72	Average
2389.950	31.89	6.04	34.54	47.53	50.92	54.00	3.08	Average
@ 2415.450	31.94	6.07	34.54	98.64	102.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

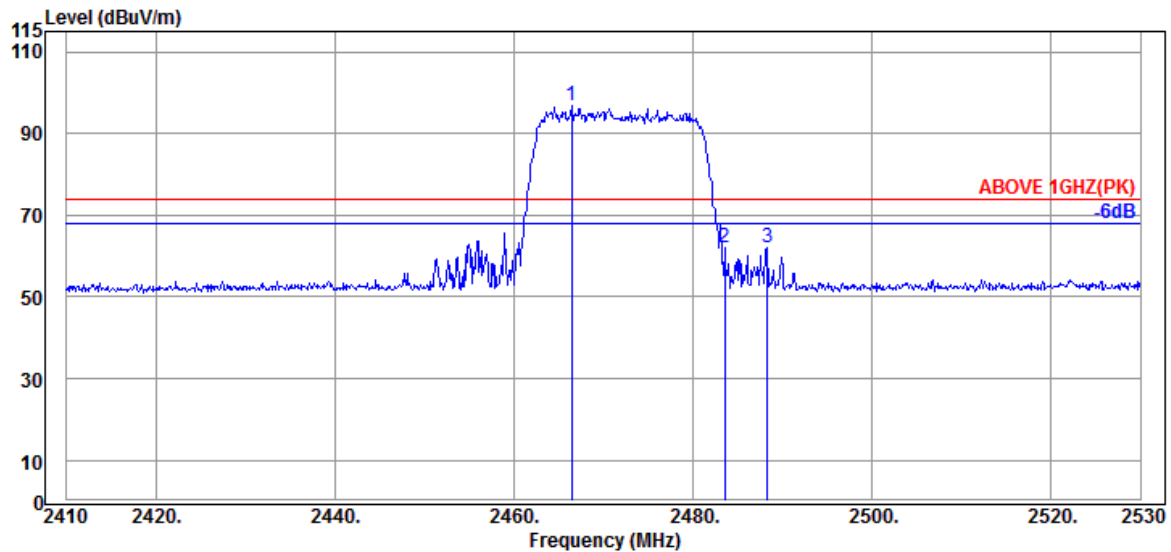

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	32.30	6.15	34.55	92.85	96.75	---	---	Peak
2483.560	32.30	6.18	34.55	58.09	62.02	74.00	11.98	Peak
2488.360	32.30	6.21	34.55	58.08	62.04	74.00	11.96	Peak

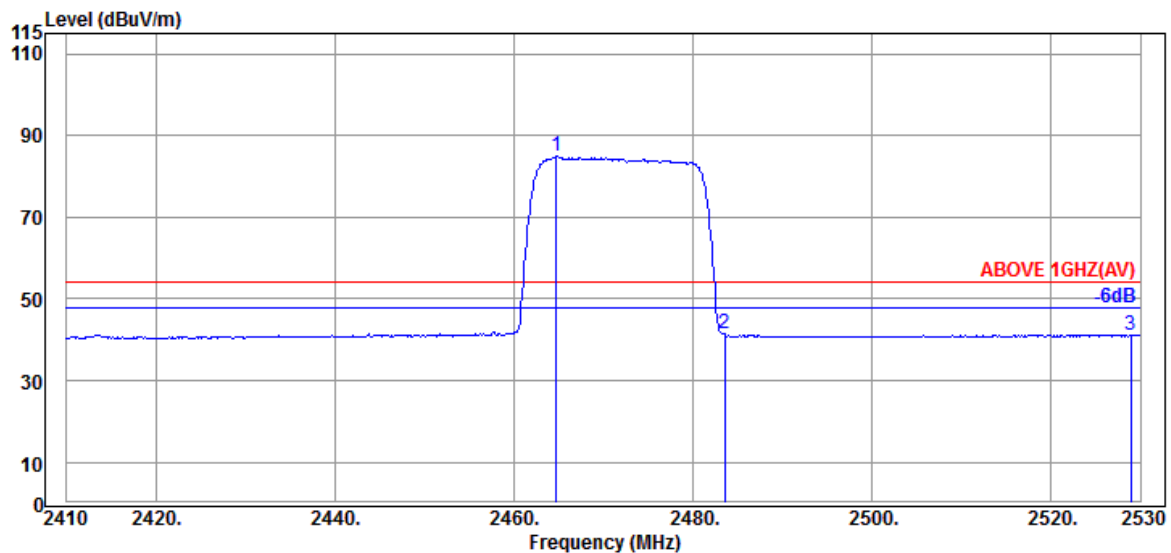

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.720	32.30	6.15	34.55	81.01	84.91	---	---	Average
2483.560	32.30	6.18	34.55	37.38	41.31	54.00	12.69	Average
2528.920	32.41	6.25	34.57	37.13	41.22	54.00	12.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

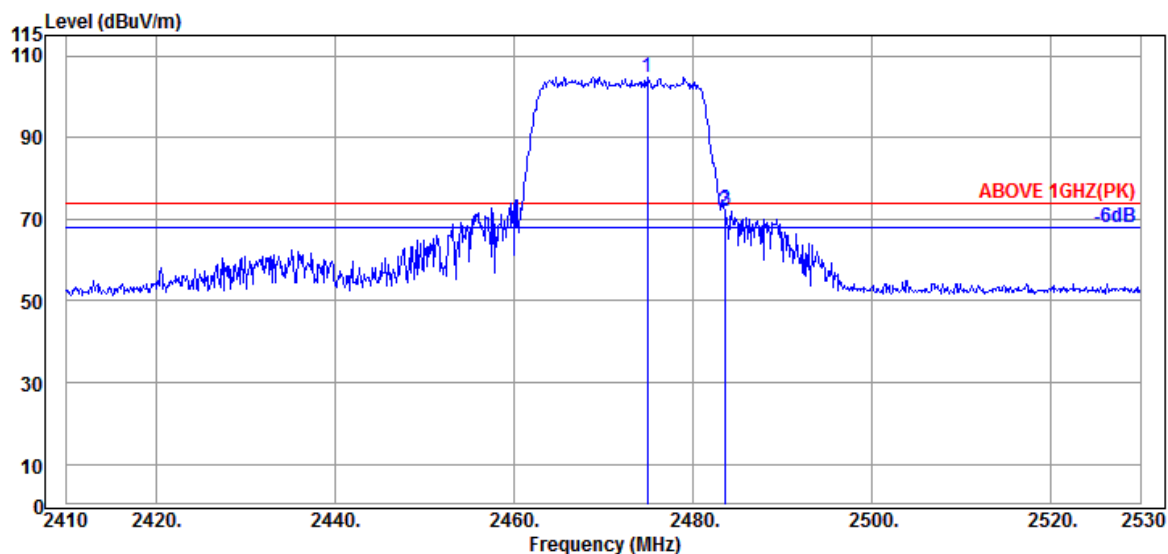

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.920	32.30	6.18	34.55	100.98	104.91	---	---	Peak
2483.560	32.30	6.18	34.55	68.05	71.98	74.00	2.02	Peak
2483.680	32.30	6.18	34.55	68.41	72.34	74.00	1.66	Peak

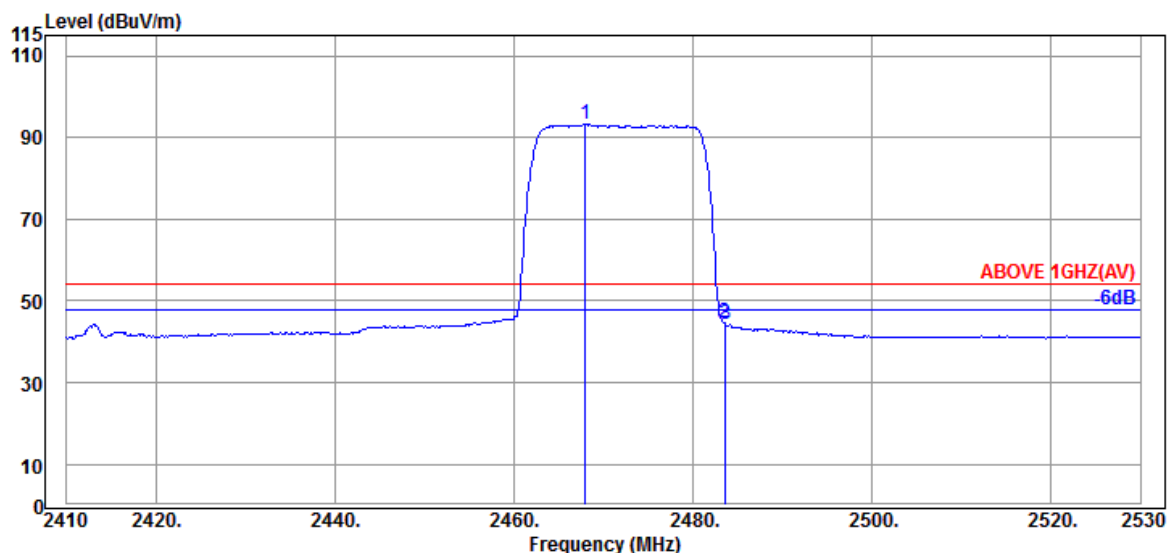

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.960	32.30	6.15	34.55	89.42	93.32	---	---	Average
2483.560	32.30	6.18	34.55	40.60	44.53	54.00	9.47	Average
2483.680	32.30	6.18	34.55	40.41	44.34	54.00	9.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220079

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

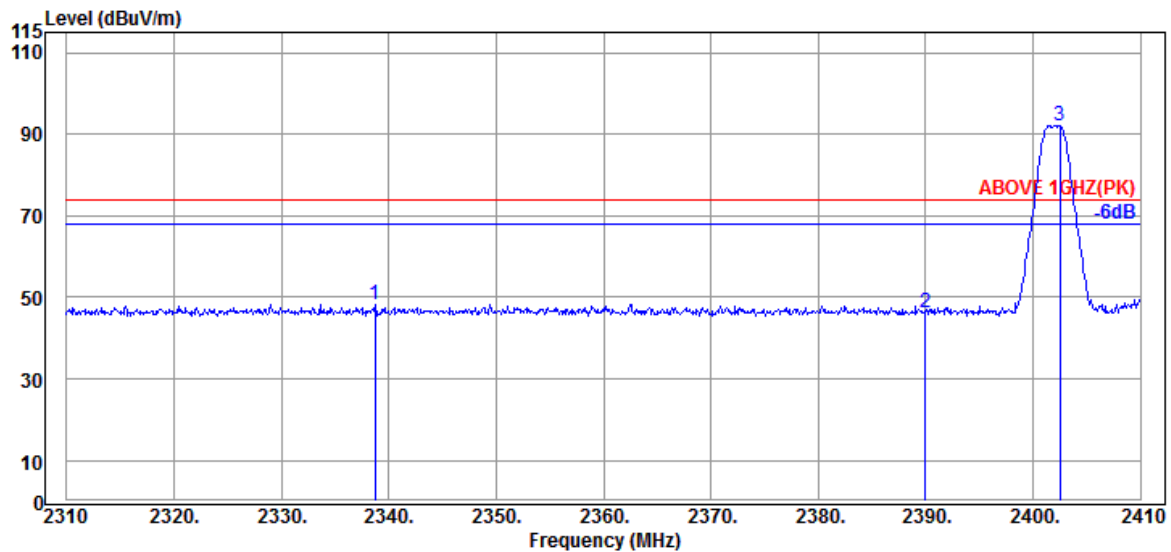

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2338.700	32.05	5.96	34.52	44.88	48.37	74.00	25.63	Peak
2390.000	31.89	6.04	34.54	42.80	46.19	74.00	27.81	Peak
@ 2402.500	31.80	6.04	34.54	88.79	92.09	---	---	Peak

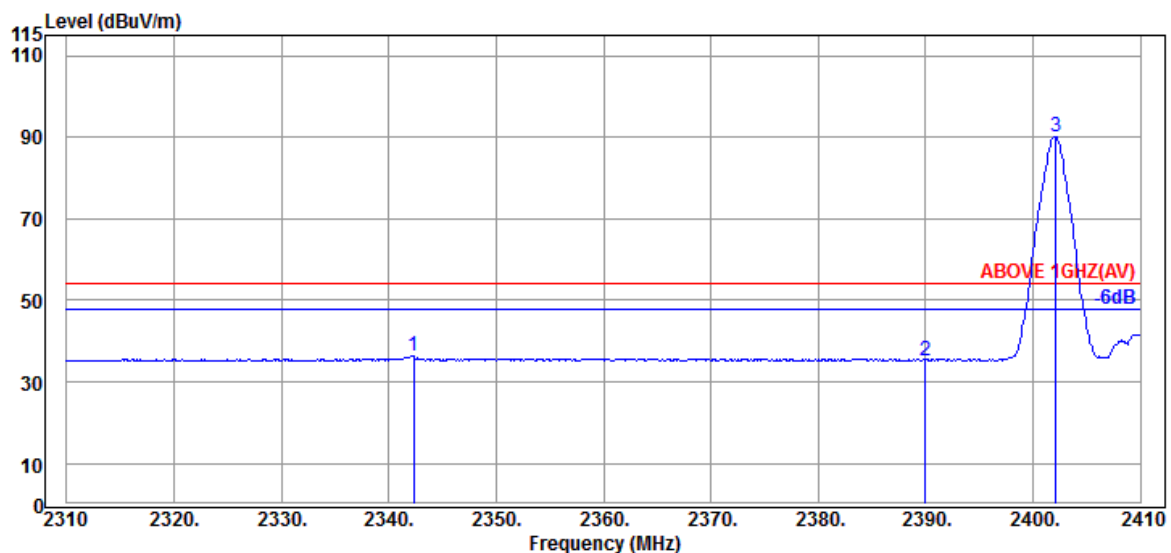

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.300	32.05	5.96	34.53	32.82	36.30	54.00	17.70	Average
2390.000	31.89	6.04	34.54	31.92	35.31	54.00	18.69	Average
@ 2402.100	31.80	6.04	34.54	86.97	90.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

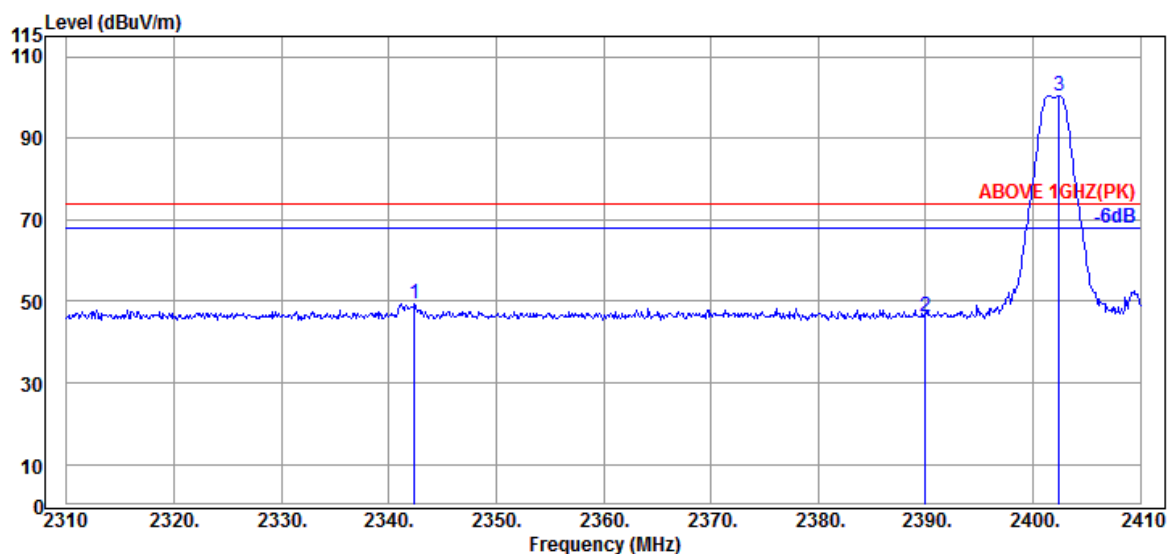

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2342.400	32.05	5.96	34.53	45.82	49.30	74.00	24.70	Peak
2390.000	31.89	6.04	34.54	42.98	46.37	74.00	27.63	Peak
@ 2402.400	31.80	6.04	34.54	97.23	100.53	---	---	Peak

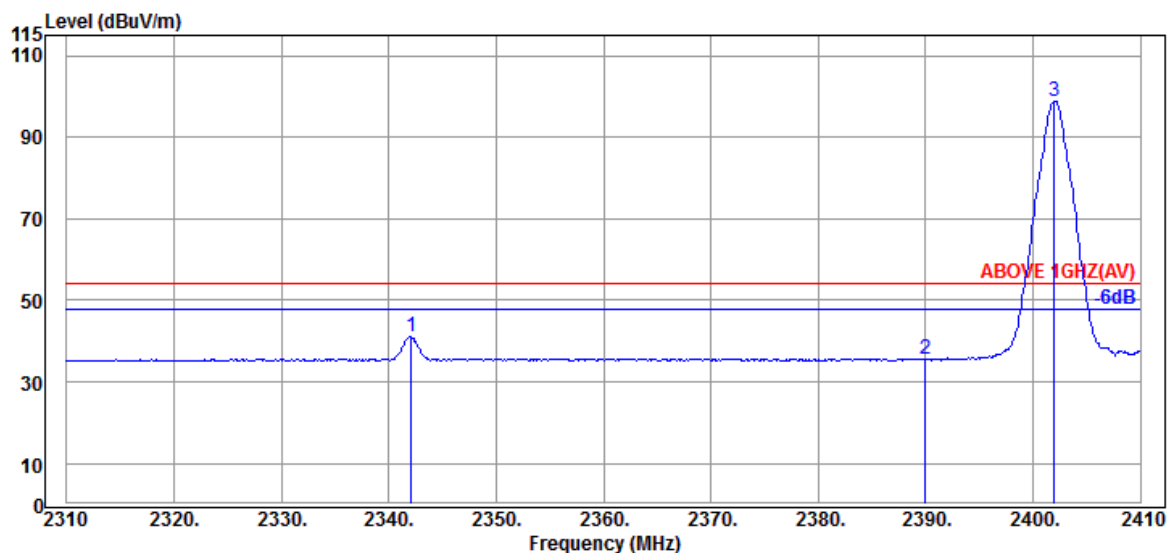

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2342.100	32.05	5.96	34.53	37.61	41.09	54.00	12.91	Average
2390.000	31.89	6.04	34.54	32.06	35.45	54.00	18.55	Average
@ 2402.000	31.80	6.04	34.54	95.68	98.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

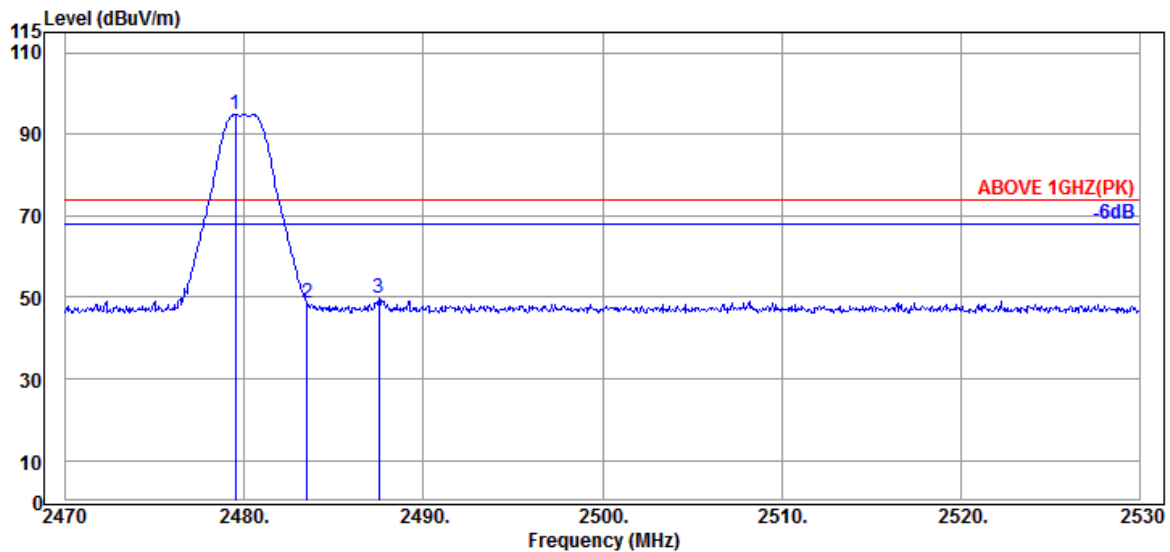

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.480	32.30	6.18	34.55	90.93	94.86	---	---	Peak
2483.500	32.30	6.18	34.55	44.72	48.65	74.00	25.35	Peak
2487.520	32.30	6.21	34.55	45.80	49.76	74.00	24.24	Peak

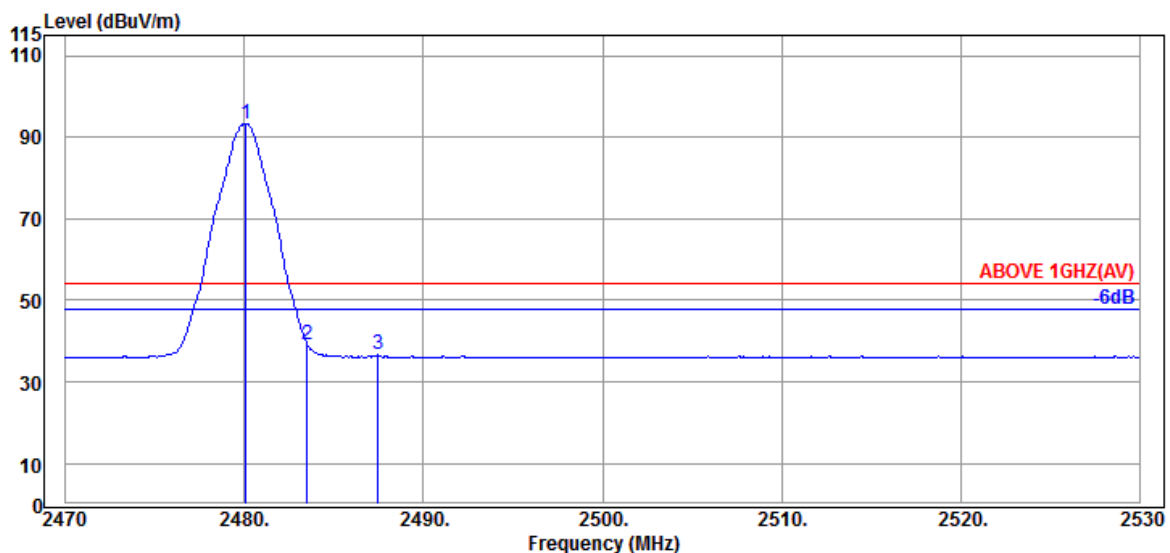

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.080	32.30	6.18	34.55	89.25	93.18	---	---	Average
2483.500	32.30	6.18	34.55	35.19	39.12	54.00	14.88	Average
2487.460	32.30	6.18	34.55	32.70	36.63	54.00	17.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

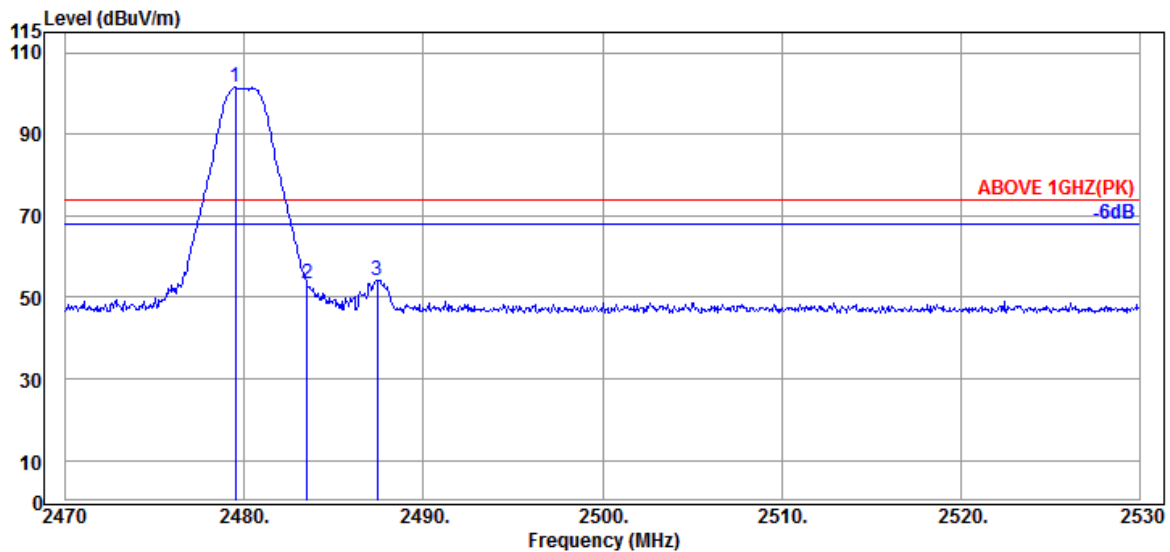

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.480	32.30	6.18	34.55	97.49	101.42	---	---	Peak
2483.500	32.30	6.18	34.55	49.46	53.39	74.00	20.61	Peak
2487.400	32.30	6.18	34.55	50.34	54.27	74.00	19.73	Peak

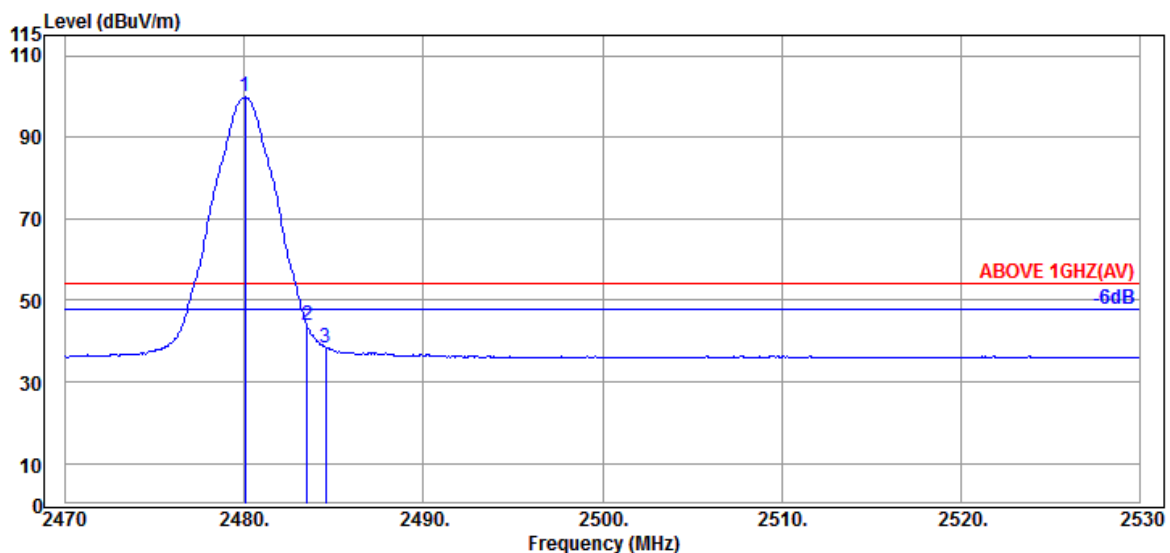

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.020	32.30	6.18	34.55	95.88	99.81	---	---	Average
2483.500	32.30	6.18	34.55	40.02	43.95	54.00	10.05	Average
2484.520	32.30	6.18	34.55	34.52	38.45	54.00	15.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	34.30	42.47	54.00	11.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.67	41.84	54.00	12.16	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.19	41.36	54.00	12.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.95	42.12	54.00	11.88	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.96	42.13	54.00	11.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.96	42.13	54.00	11.87	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.31	41.48	54.00	12.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	34.30	42.47	54.00	11.53	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.56	41.73	54.00	12.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	34.30	42.47	54.00	11.53	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	34.58	42.75	54.00	11.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	8.72	34.43	33.18	41.35	54.00	12.65	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	8.68	34.44	34.80	42.64	54.00	11.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	8.68	34.44	34.34	42.18	54.00	11.82	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	8.72	34.43	33.36	41.50	54.00	12.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	8.72	34.43	35.09	43.23	54.00	10.77	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	8.77	34.41	32.75	40.94	54.00	13.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	8.77	34.41	32.78	40.97	54.00	13.03	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9table 4 general radiated emissions limits is not required.