

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	149
A.2.3 Emissions in Non-restricted Frequency Bands.....	164
A.3 EMISSION/OCCUPIED BANDWIDTH.....	165
A.3.1 Emission/Occupied Bandwidth Result	165
A.3.2 Measurement Plots	170
A.4 MAXIMUM OUTPUT POWER	200
A.4.1 Average Output Power	200
A.4.2 Measurement Plots	204
A.5 POWER SPECTRAL DENSITY	211
A.5.1 Power Spectral Density Result	211
A.5.2 Measurement Plots	215
A.6 FREQUENCY STABILITY	235
A.6.1 Frequency stability Result	235

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)		

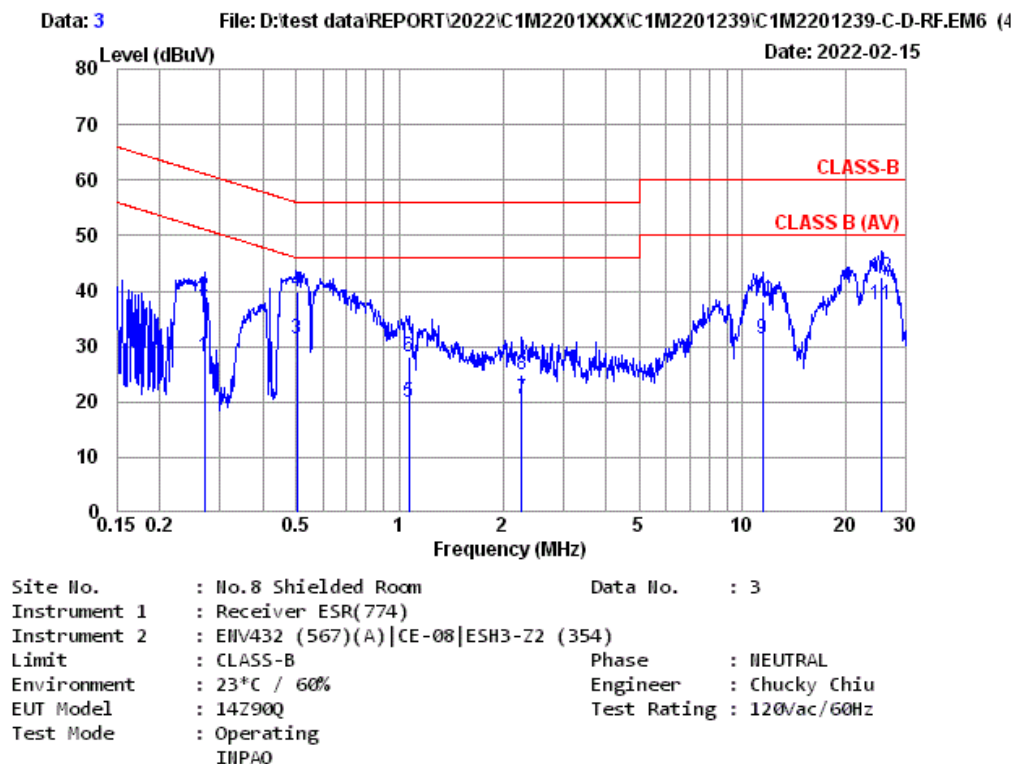

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.270	10.38	0.03	9.85	7.84	28.10	51.12	23.02	Average
2	0.270	10.38	0.03	9.85	18.78	39.04	61.12	22.08	QP
3	0.502	10.37	0.03	9.85	11.20	31.45	46.00	14.55	Average
4	0.502	10.37	0.03	9.85	19.67	39.92	56.00	16.08	QP
5	1.065	10.38	0.04	9.85	-0.31	19.96	46.00	26.04	Average
6	1.065	10.38	0.04	9.85	7.80	28.07	56.00	27.93	QP
7	2.273	10.42	0.07	9.86	0.23	20.58	46.00	25.42	Average
8	2.273	10.42	0.07	9.86	4.42	24.77	56.00	31.23	QP
9	11.438	10.76	0.15	9.90	10.62	31.43	50.00	18.57	Average
10	11.438	10.76	0.15	9.90	17.30	38.11	60.00	21.89	QP
11	25.456	11.27	0.22	9.97	15.97	37.43	50.00	12.57	Average
12	25.456	11.27	0.22	9.97	21.13	42.59	60.00	17.41	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1 (with INPAQ Antenna)		

Data: 4 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201239\C1M2201239-C-D-RF.EM6 (4) Date: 2022-02-15

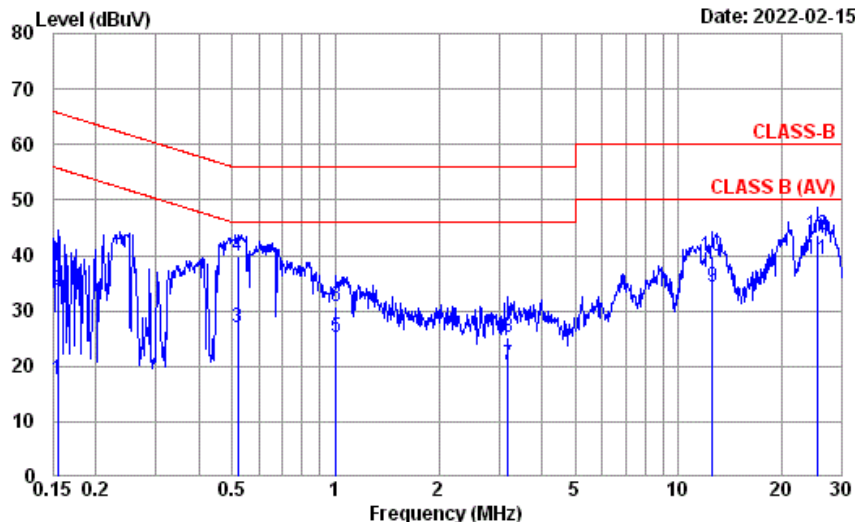

Site No. : No.8 Shielded Room Data No. : 4
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 23°C / 60% Engineer : Chucky Chiu
EUT Model : 14Z90Q Test Rating : 120Vac/60Hz
Test Mode : Operating
INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.155	10.40	0.03	9.85	-2.74	17.54	55.74	38.20	Average
2	0.155	10.40	0.03	9.85	13.42	33.70	65.74	32.04	QP
3	0.518	10.37	0.03	9.85	6.75	27.00	46.00	19.00	Average
4	0.518	10.37	0.03	9.85	19.68	39.93	56.00	16.07	QP
5	1.005	10.38	0.04	9.85	5.02	25.29	46.00	20.71	Average
6	1.005	10.38	0.04	9.85	10.62	30.89	56.00	25.11	QP
7	3.190	10.41	0.08	9.86	-0.05	20.30	46.00	25.70	Average
8	3.190	10.41	0.08	9.86	4.74	25.09	56.00	30.91	QP
9	12.582	10.63	0.15	9.90	13.63	34.31	50.00	15.69	Average
10	12.582	10.63	0.15	9.90	19.10	39.78	60.00	20.22	QP
11	25.456	10.83	0.22	9.97	18.34	39.36	50.00	10.64	Average
12	25.456	10.83	0.22	9.97	22.63	43.65	60.00	16.35	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

Data: 2 File: D:\test data\REPORT\2022\1M2201XXX\1M2201239\1M2201239-C-D-RF.EM6 (4)

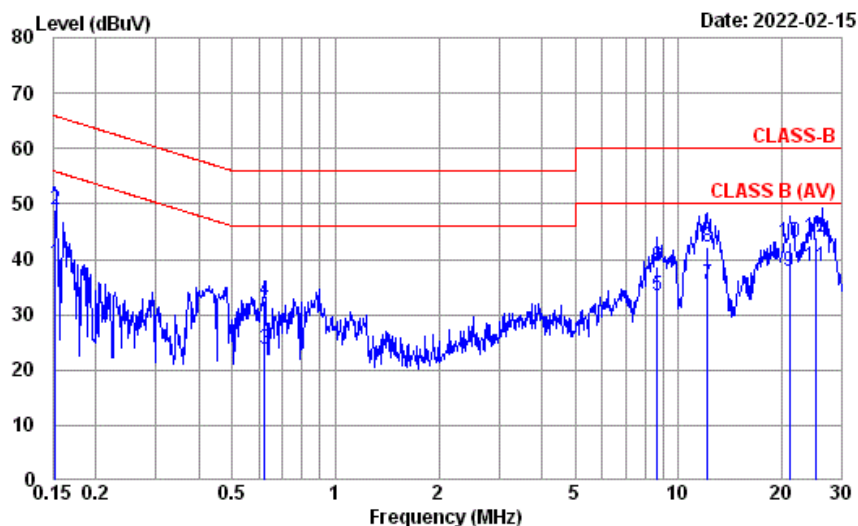

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENH432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 23°C / 60%	Engineer	: Chucky Chiu
EUT Model	: 14Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	18.88	39.17	55.87	16.70	Average
2	0.152	10.41	0.03	9.85	28.51	48.80	65.87	17.07	QP
3	0.621	10.37	0.03	9.85	3.48	23.73	46.00	22.27	Average
4	0.621	10.37	0.03	9.85	12.18	32.43	56.00	23.57	QP
5	8.683	10.64	0.13	9.88	12.67	33.32	50.00	16.68	Average
6	8.683	10.64	0.13	9.88	17.99	38.64	60.00	21.36	QP
7	12.124	10.79	0.15	9.90	14.53	35.37	50.00	14.63	Average
8	12.124	10.79	0.15	9.90	21.22	42.06	60.00	17.94	QP
9	21.035	11.13	0.20	9.95	16.56	37.84	50.00	12.16	Average
10	21.035	11.13	0.20	9.95	21.91	43.19	60.00	16.81	QP
11	25.055	11.26	0.22	9.97	17.33	38.78	50.00	11.22	Average
12	25.055	11.26	0.22	9.97	22.43	43.88	60.00	16.12	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/02/15	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

Data: 1 File: D:\test data\REPORT\2022\C1M2201XXX\C1M2201239\C1M2201239-C-D-RF-EM6 (4

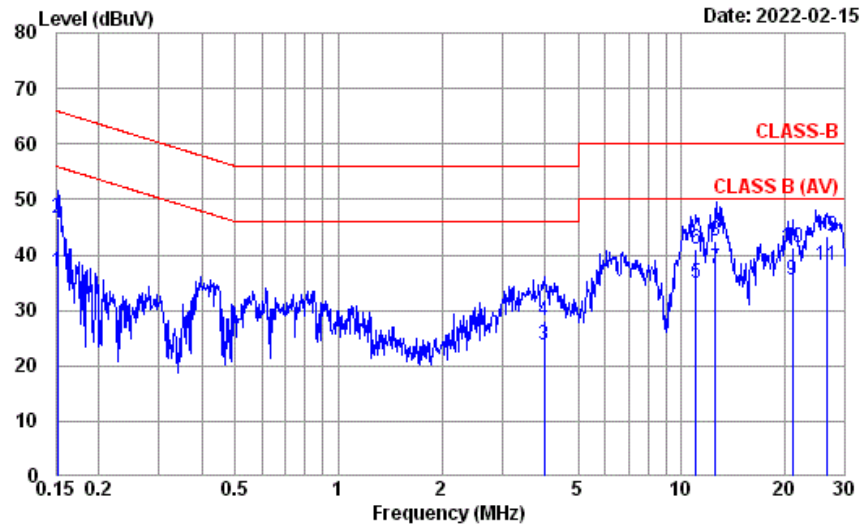

Site No. : No.8 Shielded Room Data No. : 1
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 23°C / 60% Engineer : Chucky Chiu
EUT Model : 14Z90Q Test Rating : 120Vac/60Hz
Test Mode : Operating
Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	16.62	36.90	55.91	19.01	Average
2	0.152	10.40	0.03	9.85	26.27	46.55	65.91	19.36	QP
3	3.985	10.42	0.09	9.86	3.33	23.70	46.00	22.30	Average
4	3.985	10.42	0.09	9.86	7.68	28.05	56.00	27.95	QP
5	11.021	10.59	0.15	9.89	14.24	34.87	50.00	15.13	Average
6	11.021	10.59	0.15	9.89	20.36	40.99	60.00	19.01	QP
7	12.582	10.63	0.15	9.90	16.83	37.51	50.00	12.49	Average
8	12.582	10.63	0.15	9.90	21.94	42.62	60.00	17.38	QP
9	21.035	10.78	0.20	9.95	14.46	35.39	50.00	14.61	Average
10	21.035	10.78	0.20	9.95	20.29	41.22	60.00	18.78	QP
11	26.418	10.84	0.23	9.98	17.05	38.10	50.00	11.90	Average
12	26.418	10.84	0.23	9.98	22.19	43.24	60.00	16.76	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/01/20~02/14	Temp./Hum.	19~21°C/62~71%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

● SKU #1 (with INPAQ Antenna)

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	38.58	30.61	40.00	9.39	Peak
152.220	16.17	2.88	32.28	45.99	32.76	43.50	10.74	Peak
317.120	19.50	4.53	32.25	47.36	39.14	46.00	6.86	Peak
593.570	24.23	6.75	32.31	37.26	35.93	46.00	10.07	Peak
896.210	26.29	8.42	31.50	37.80	41.01	46.00	4.99	Peak
962.170	26.83	8.78	30.89	29.06	33.78	54.00	20.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	41.74	33.77	40.00	6.23	Peak
98.870	16.33	2.26	32.35	46.77	33.01	43.50	10.49	Peak
423.820	21.83	5.77	32.23	43.75	39.12	46.00	6.88	Peak
593.570	24.23	6.75	32.31	38.35	37.02	46.00	8.98	Peak
896.210	26.29	8.42	31.50	34.95	38.16	46.00	7.84	Peak
961.200	26.83	8.78	30.89	30.54	35.26	54.00	18.74	Peak

● SKU #2 (with LUXSHARE-ICT Antenna)

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
85.290	13.89	2.10	32.36	43.73	27.36	40.00	12.64	Peak
152.220	16.17	2.88	32.28	45.79	32.56	43.50	10.94	Peak
423.820	21.83	5.77	32.23	44.24	39.61	46.00	6.39	Peak
677.960	24.68	7.17	32.13	36.35	36.07	46.00	9.93	Peak
903.000	26.33	8.46	31.46	37.02	40.35	46.00	5.65	Peak
983.510	26.99	8.88	30.73	37.39	42.53	54.00	11.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.24	32.43	44.06	35.39	40.00	4.61	Peak
127.000	17.59	2.61	32.31	44.83	32.72	43.50	10.78	Peak
423.820	21.83	5.77	32.23	45.77	41.14	46.00	4.86	Peak
593.570	24.23	6.75	32.31	38.16	36.83	46.00	9.17	Peak
897.180	26.29	8.42	31.50	37.76	40.97	46.00	5.03	Peak
983.510	26.99	8.88	30.73	35.06	40.20	54.00	13.80	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

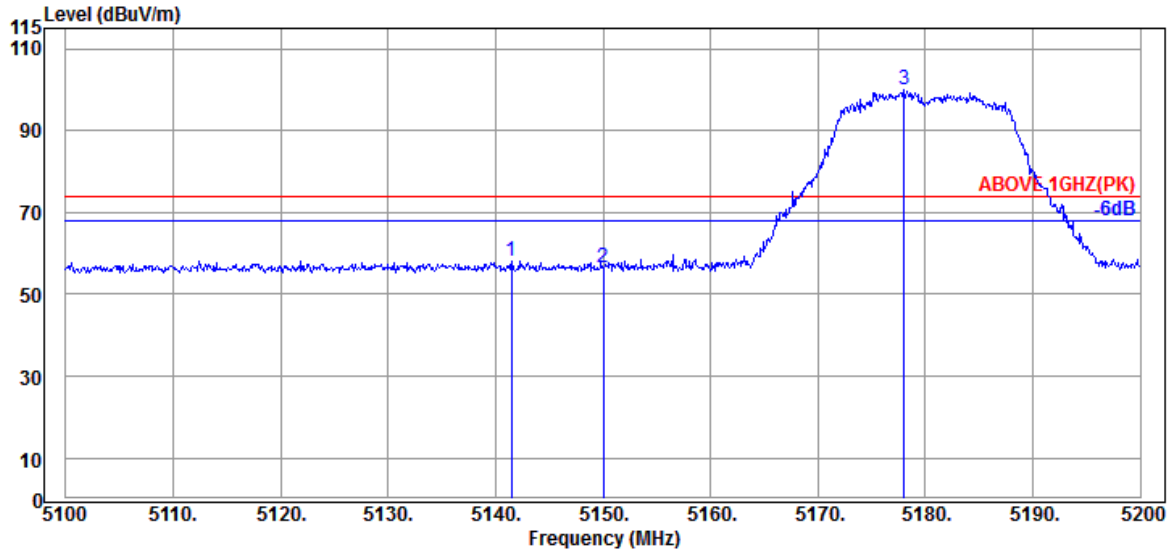

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.500	34.17	8.92	34.36	49.31	58.04	74.00	15.96	Peak
5150.000	34.20	8.92	34.35	47.88	56.65	74.00	17.35	Peak
@ 5178.000	34.20	8.95	34.34	91.27	100.08	---	---	Peak

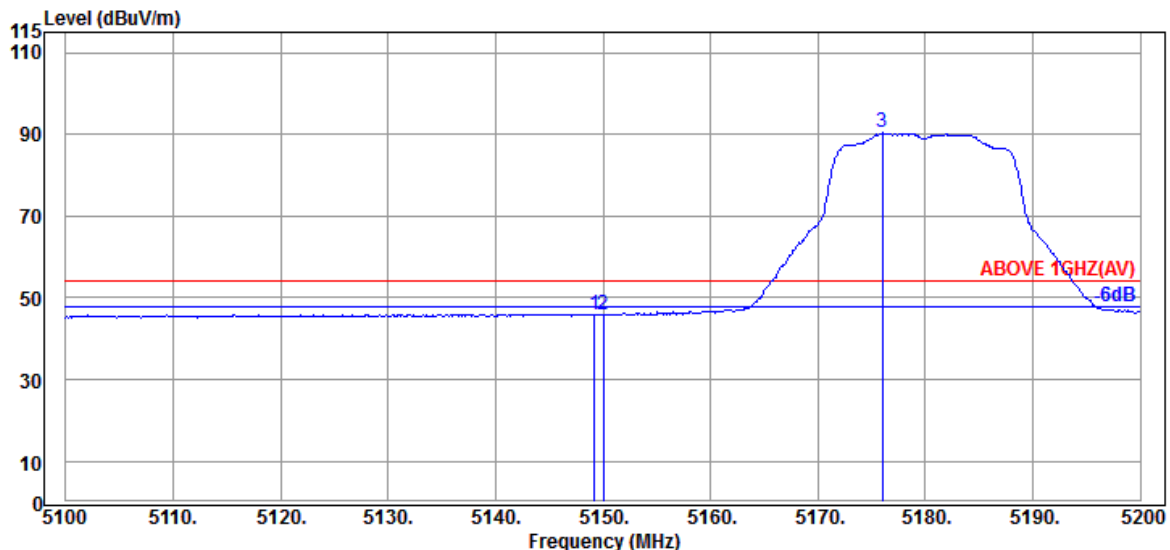

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	8.92	34.35	37.22	45.99	54.00	8.01	Average
5150.000	34.20	8.92	34.35	36.96	45.73	54.00	8.27	Average
@ 5176.000	34.20	8.95	34.34	81.51	90.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

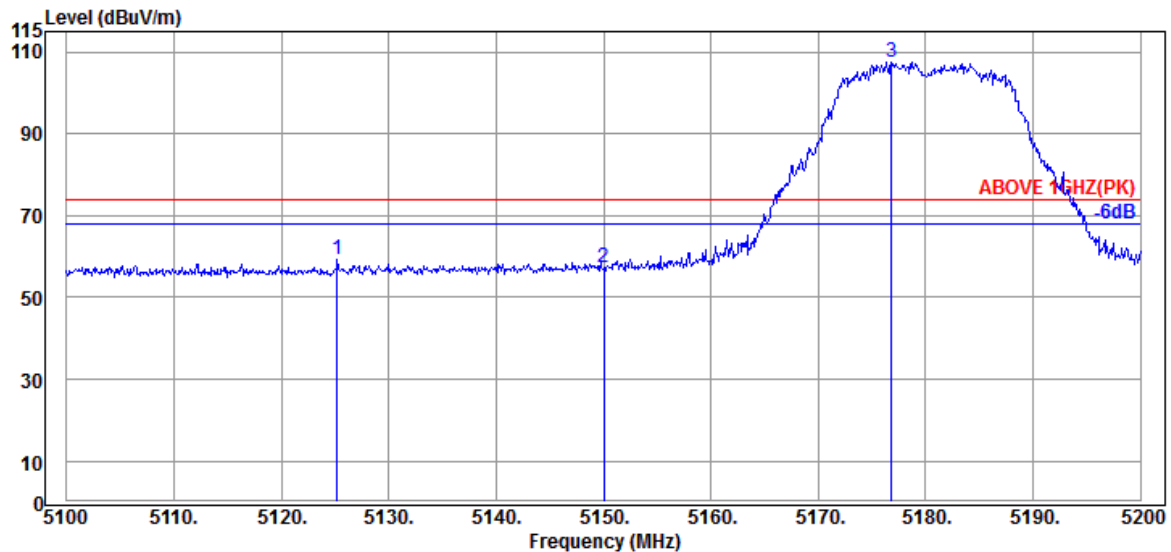

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5125.200	34.13	8.91	34.36	50.64	59.32	74.00	14.68	Peak
5150.000	34.20	8.92	34.35	48.66	57.43	74.00	16.57	Peak
@ 5176.800	34.20	8.95	34.34	98.83	107.64	---	---	Peak

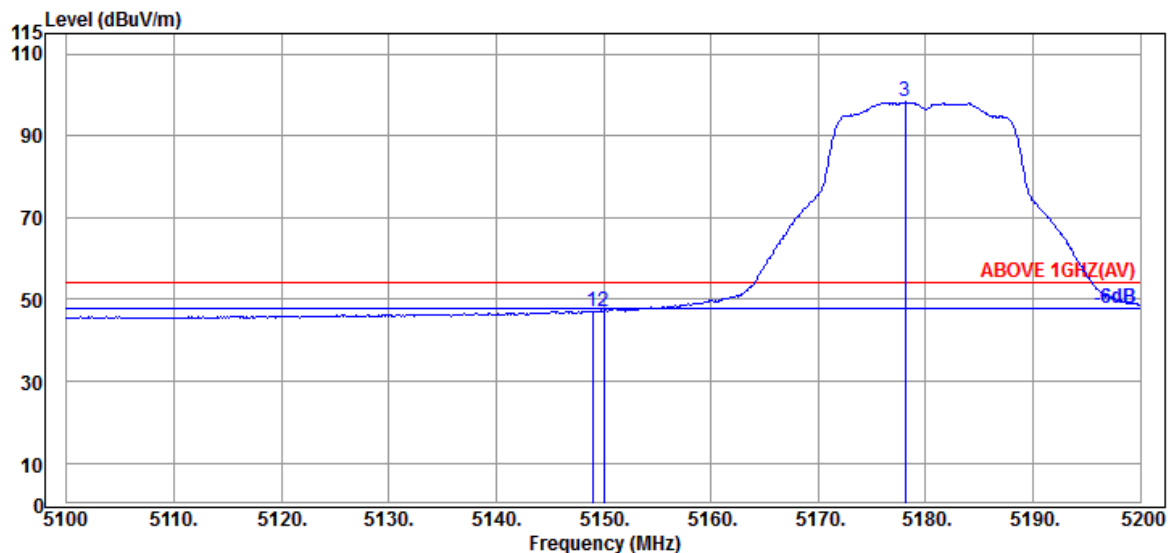

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.000	34.20	8.92	34.35	38.43	47.20	54.00	6.80	Average
5150.000	34.20	8.92	34.35	38.44	47.21	54.00	6.79	Average
@ 5178.100	34.20	8.95	34.34	89.58	98.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

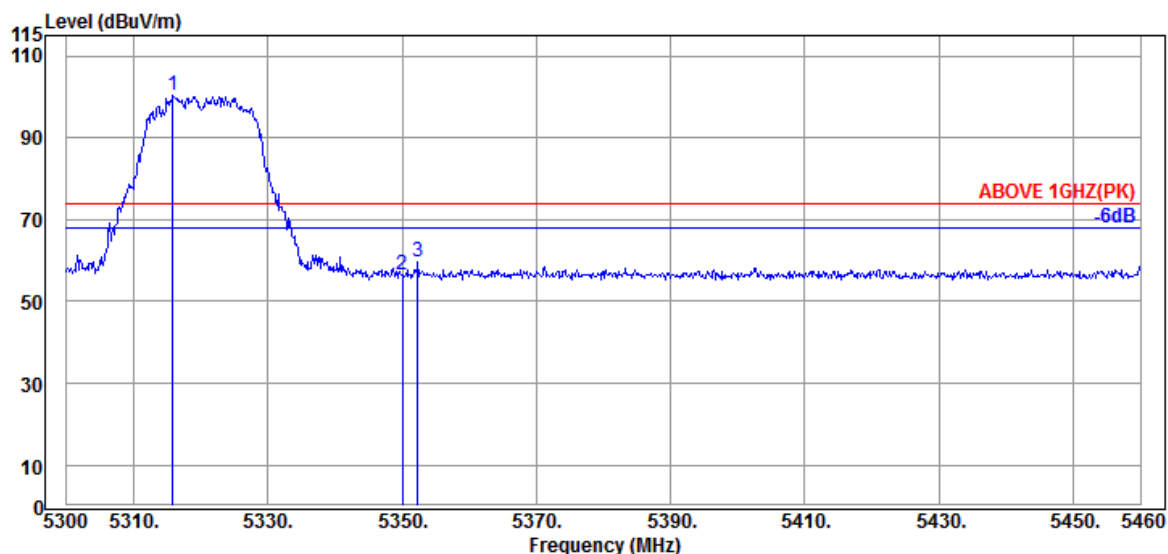

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5315.840	34.53	9.07	34.29	90.98	100.29	---	---	Peak
	5350.080	34.60	9.10	34.27	46.93	56.36	74.00	17.64	Peak
	5352.320	34.60	9.10	34.27	50.17	59.60	74.00	14.40	Peak

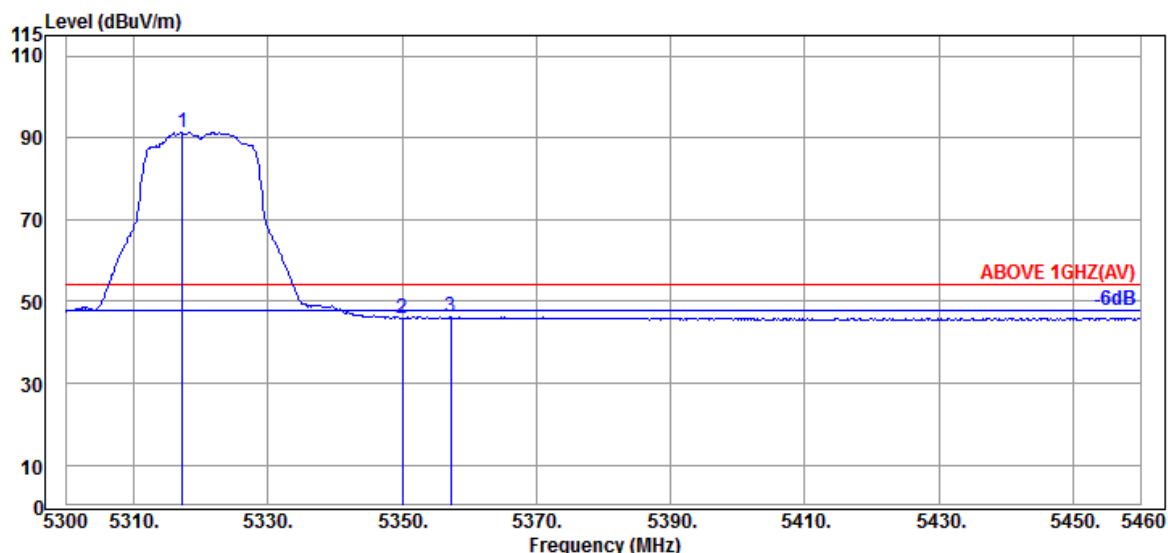

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.280	34.53	9.07	34.29	82.00	91.31	---	---	Average
	5350.080	34.60	9.10	34.27	36.44	45.87	54.00	8.13	Average
	5357.280	34.63	9.10	34.27	36.73	46.19	54.00	7.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

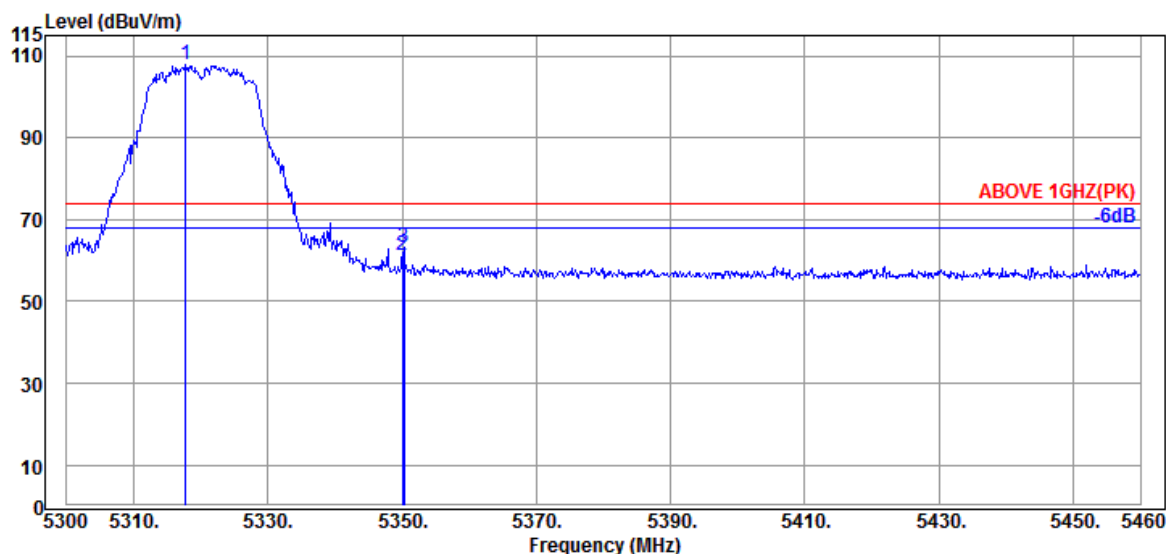

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.760	34.53	9.07	34.29	98.72	108.03	---	---	Peak
5350.080	34.60	9.10	34.27	51.64	61.07	74.00	12.93	Peak
5350.240	34.60	9.10	34.27	53.62	63.05	74.00	10.95	Peak

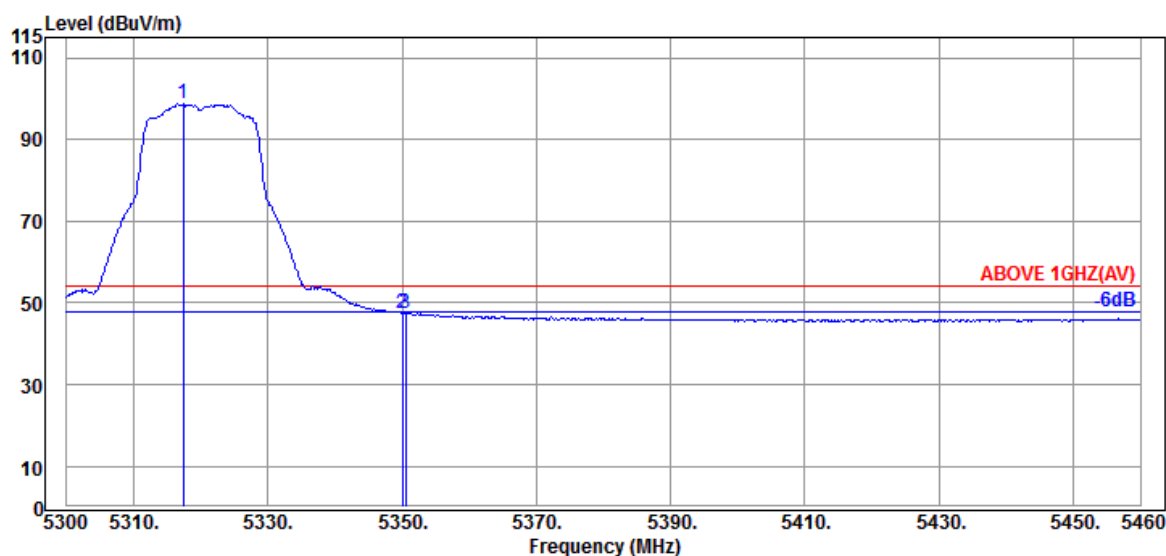

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.53	9.07	34.29	89.33	98.64	---	---	Average
5350.080	34.60	9.10	34.27	37.99	47.42	54.00	6.58	Average
5350.560	34.60	9.10	34.27	38.10	47.53	54.00	6.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

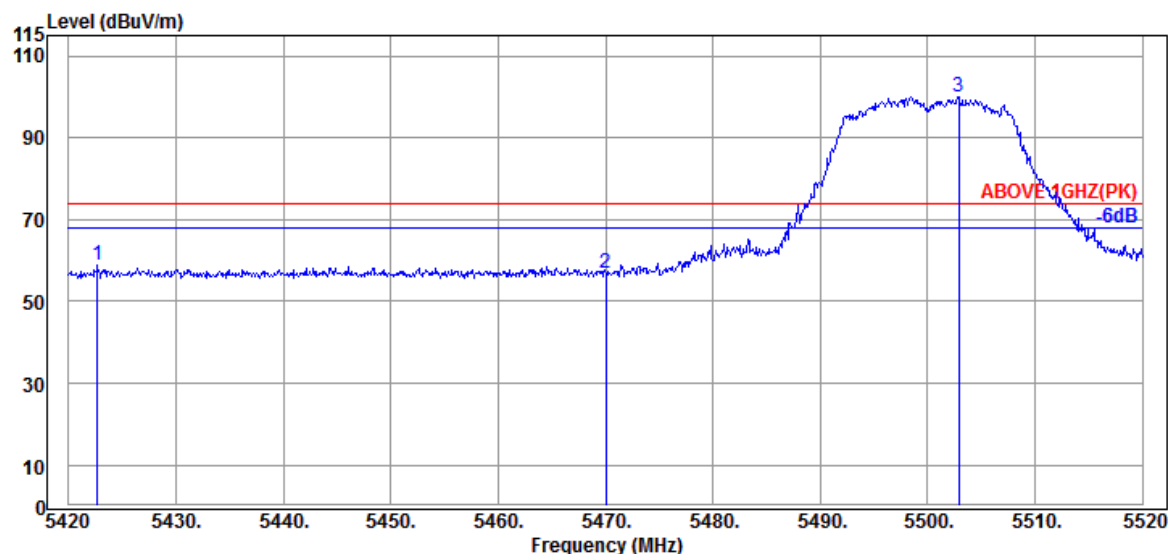

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.700	34.60	9.15	34.26	49.22	58.71	74.00	15.29	Peak
5470.000	34.47	9.20	34.24	47.44	56.87	74.00	17.13	Peak
@ 5502.900	34.40	9.23	34.24	90.51	99.90	---	---	Peak

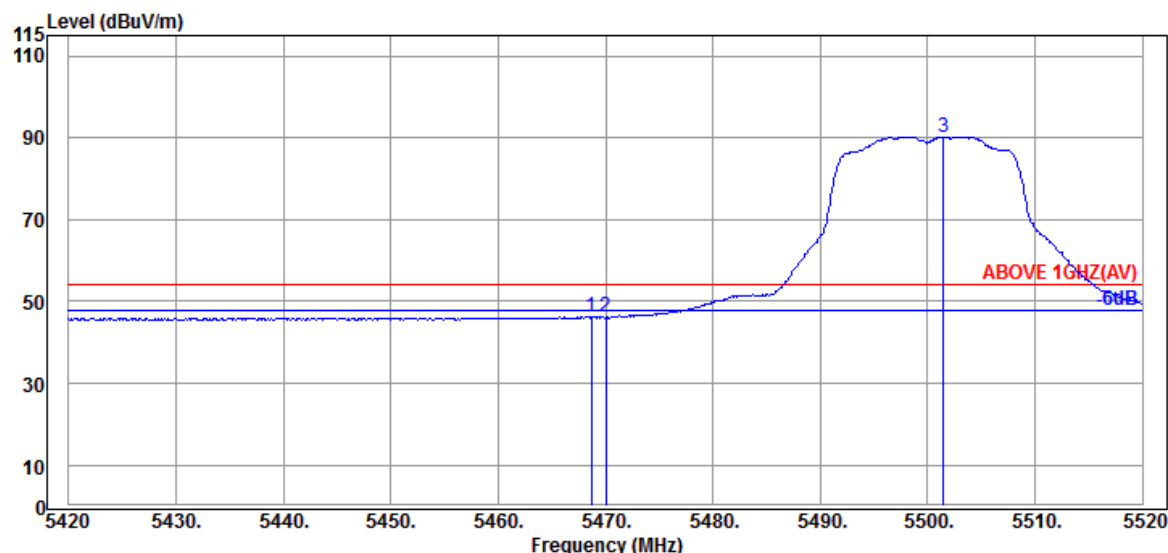

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.47	9.20	34.24	36.79	46.22	54.00	7.78	Average
5470.000	34.47	9.20	34.24	36.64	46.07	54.00	7.93	Average
@ 5501.500	34.40	9.23	34.24	80.86	90.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

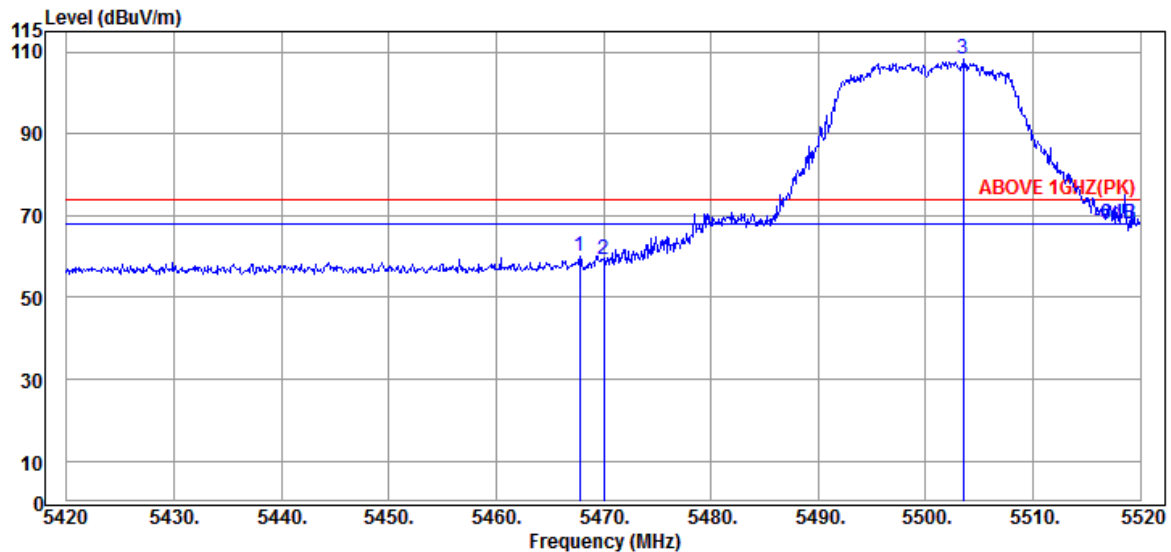

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.800	34.47	9.20	34.24	50.54	59.97	74.00	14.03	Peak
5470.000	34.47	9.20	34.24	49.85	59.28	74.00	14.72	Peak
@ 5503.500	34.40	9.23	34.24	98.94	108.33	---	---	Peak

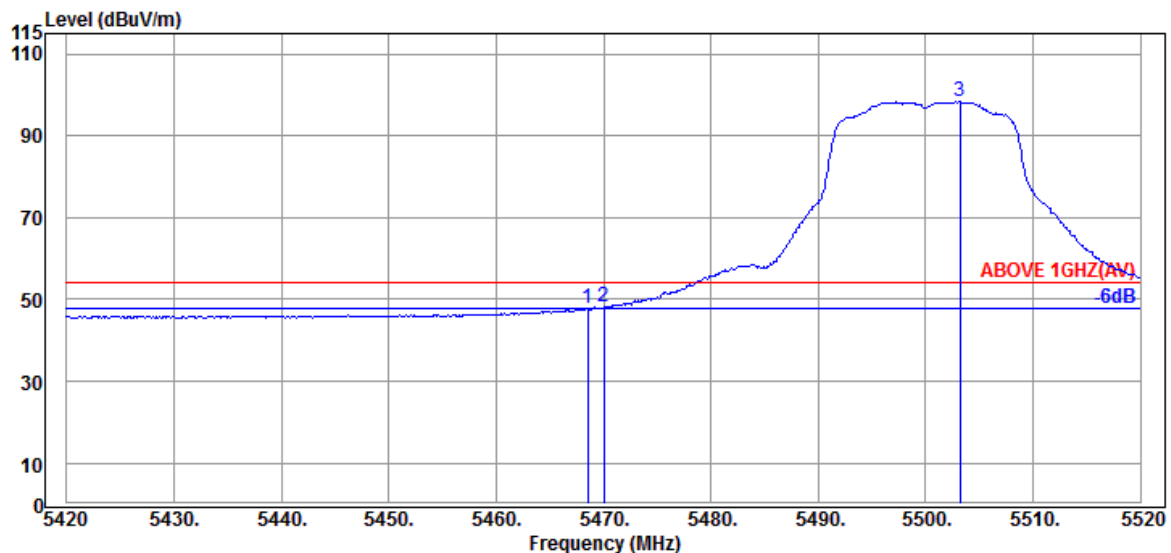

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.500	34.47	9.20	34.24	38.47	47.90	54.00	6.10	Average
5470.000	34.47	9.20	34.24	38.63	48.06	54.00	5.94	Average
@ 5503.200	34.40	9.23	34.24	88.91	98.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

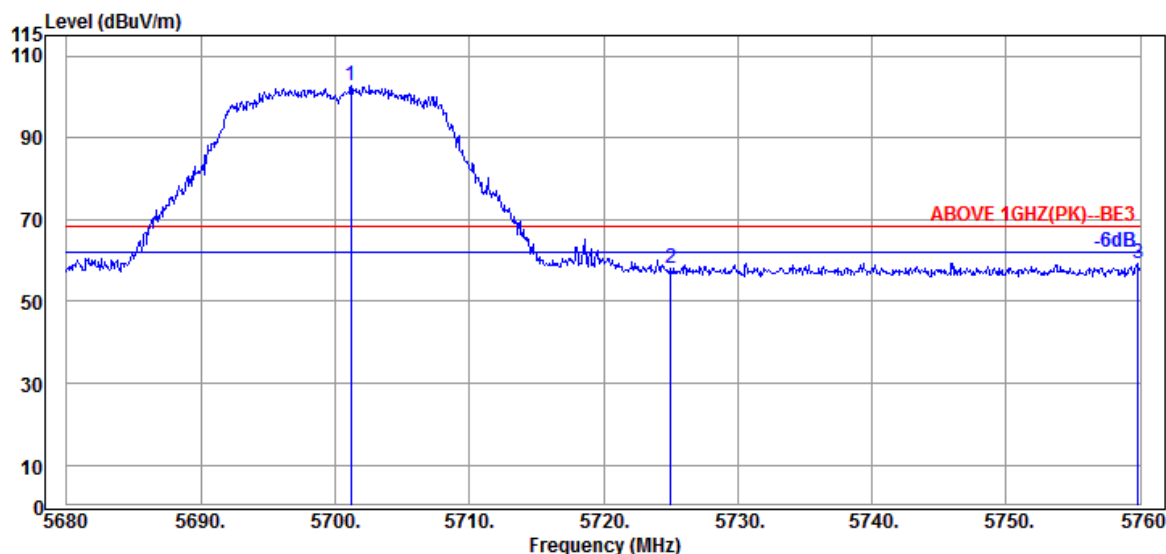

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.200	34.40	9.40	34.31	93.31	102.80	---	---	Peak
	5725.040	34.67	9.42	34.32	48.47	58.24	68.20	9.96	Peak
	5759.840	34.87	9.45	34.35	49.46	59.43	68.20	8.77	Peak

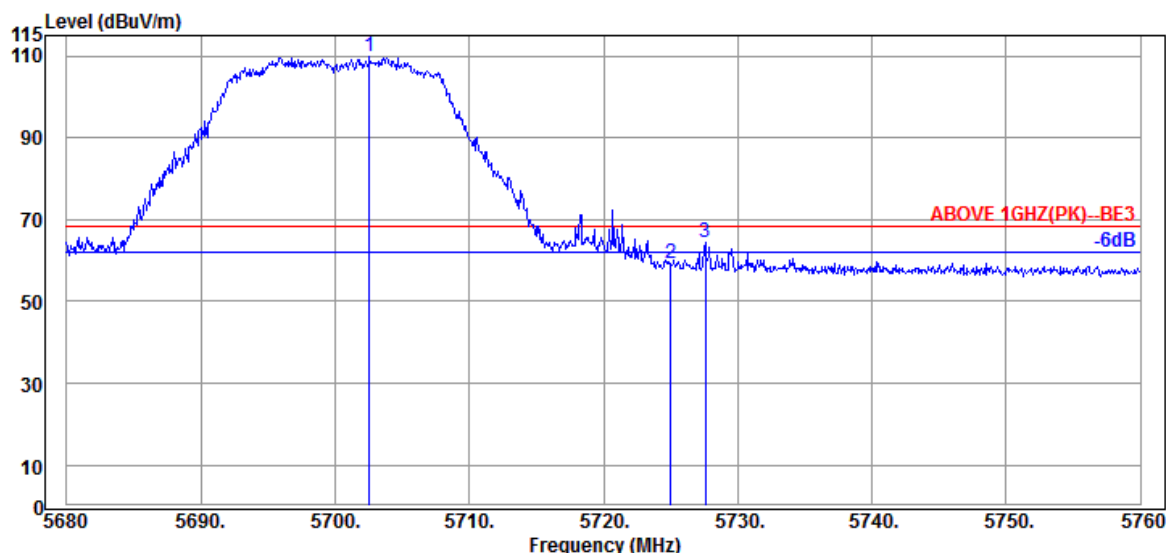

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.560	34.40	9.40	34.31	100.46	109.95	---	---	Peak
	5725.040	34.67	9.42	34.32	49.49	59.26	68.20	8.94	Peak
	5727.600	34.67	9.42	34.32	54.77	64.54	68.20	3.66	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

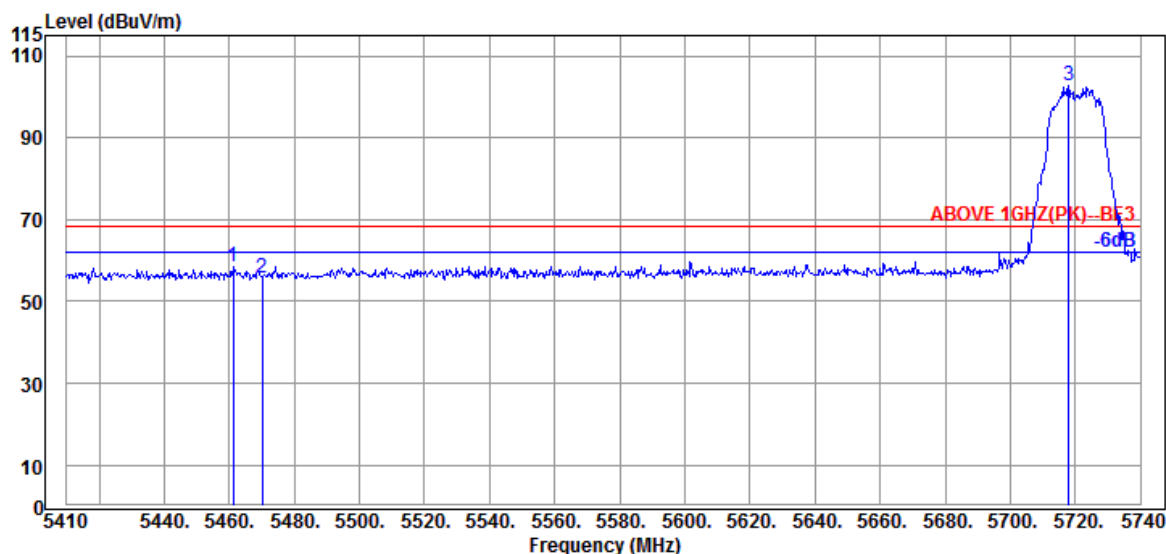

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.150	34.50	9.18	34.24	48.94	58.38	68.20	9.82	Peak
5470.060	34.47	9.20	34.24	46.42	55.85	68.20	12.35	Peak
@ 5717.890	34.53	9.42	34.32	93.07	102.70	---	---	Peak

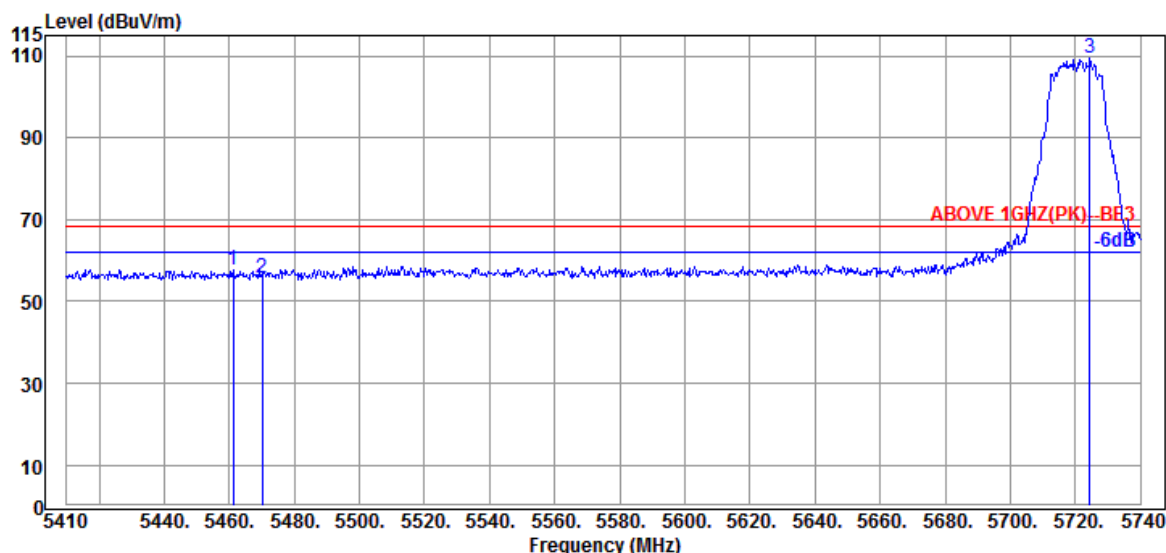

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.150	34.50	9.18	34.24	48.38	57.82	68.20	10.38	Peak
5470.060	34.47	9.20	34.24	46.48	55.91	68.20	12.29	Peak
@ 5724.490	34.67	9.42	34.32	99.72	109.49	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

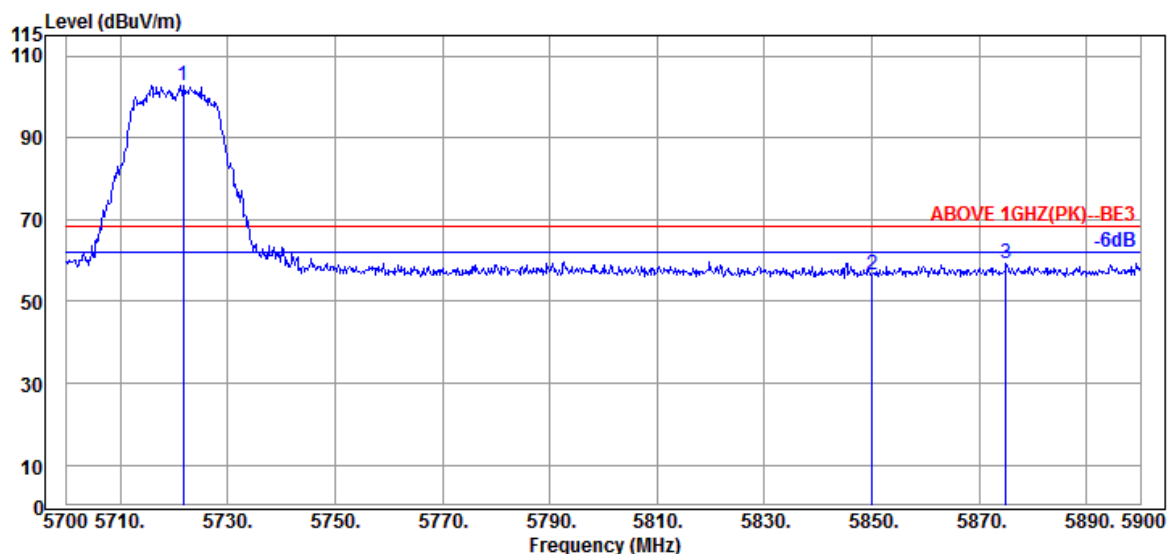

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5721.800	34.53	9.42	34.32	93.09	102.72	---	---	Peak
	5850.000	35.10	9.52	34.38	46.25	56.49	68.20	11.71	Peak
	5875.000	35.30	9.55	34.39	48.64	59.10	68.20	9.10	Peak

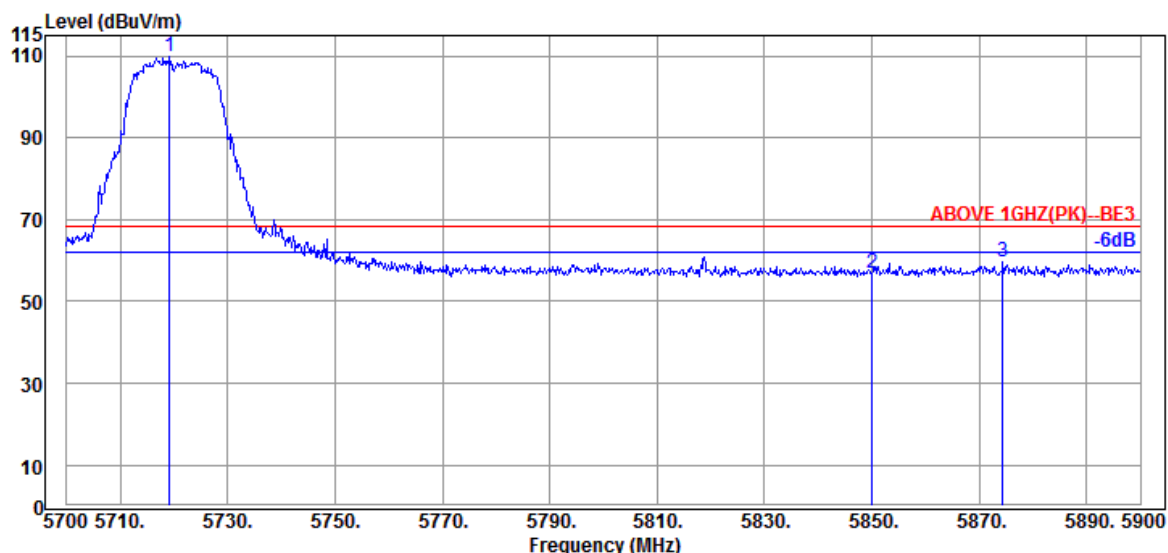

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5719.200	34.53	9.42	34.32	100.19	109.82	---	---	Peak
	5850.000	35.10	9.52	34.38	46.69	56.93	68.20	11.27	Peak
	5874.400	35.30	9.55	34.39	49.19	59.65	68.20	8.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

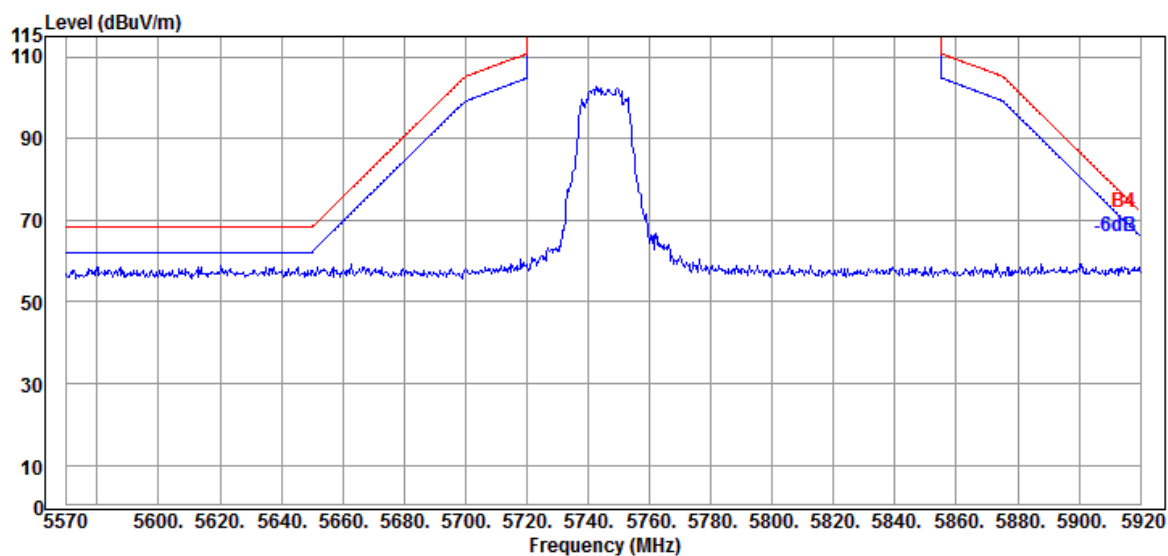

Antenna at Vertical Polarization

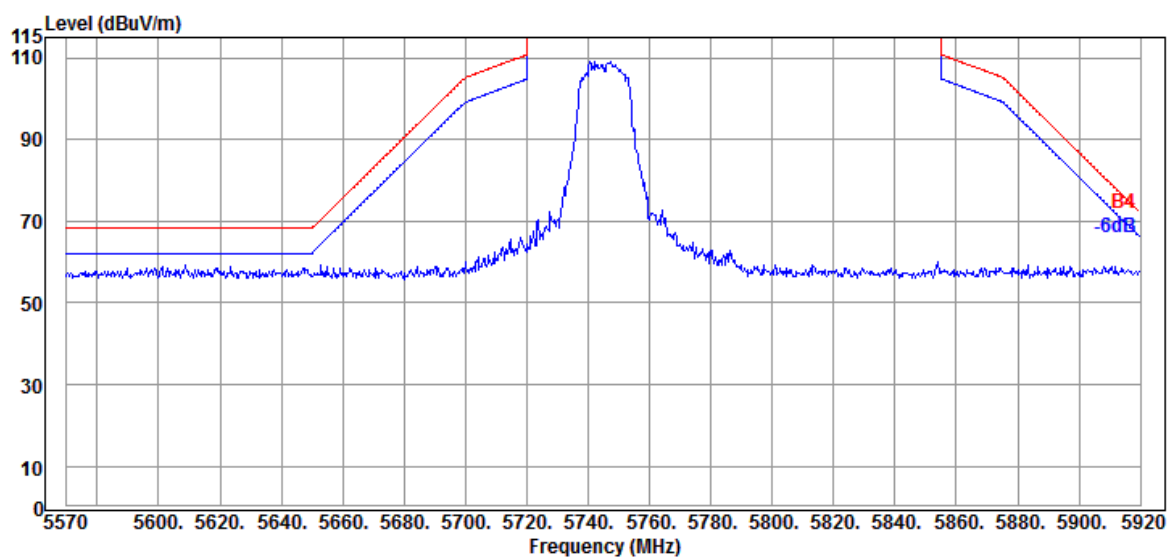


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

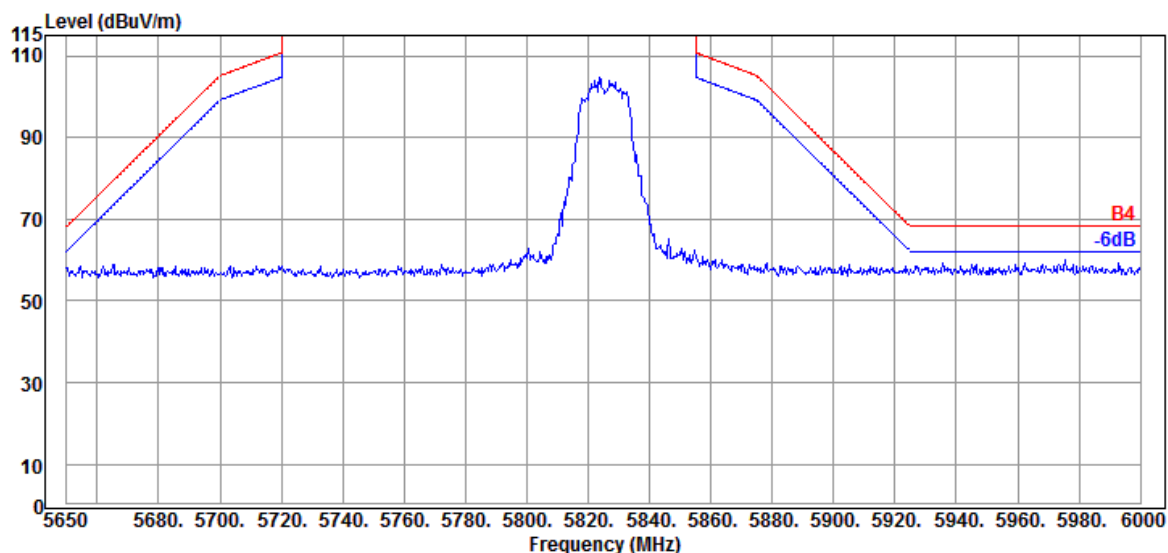

Antenna at Vertical Polarization

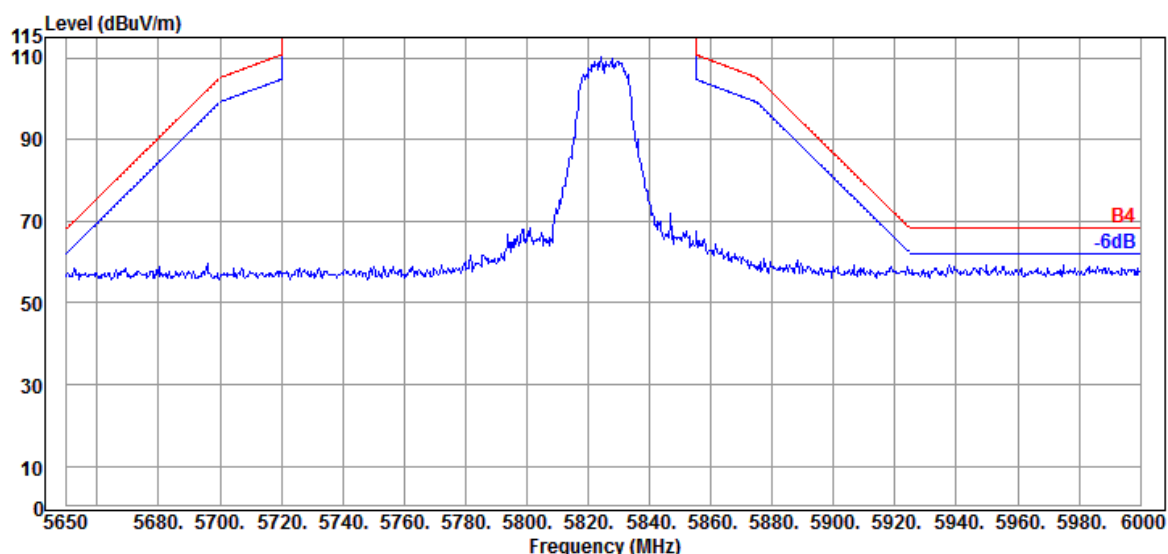

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

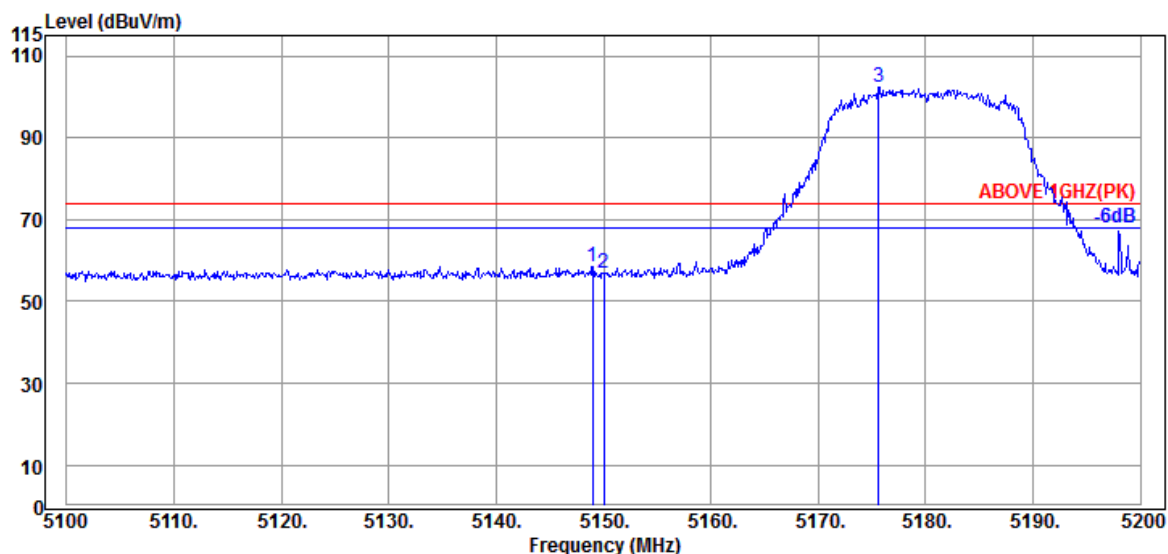

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.20	8.92	34.35	49.71	58.48	74.00	15.52	Peak
5150.000	34.20	8.92	34.35	48.01	56.78	74.00	17.22	Peak
@ 5175.600	34.20	8.95	34.34	93.63	102.44	---	---	Peak

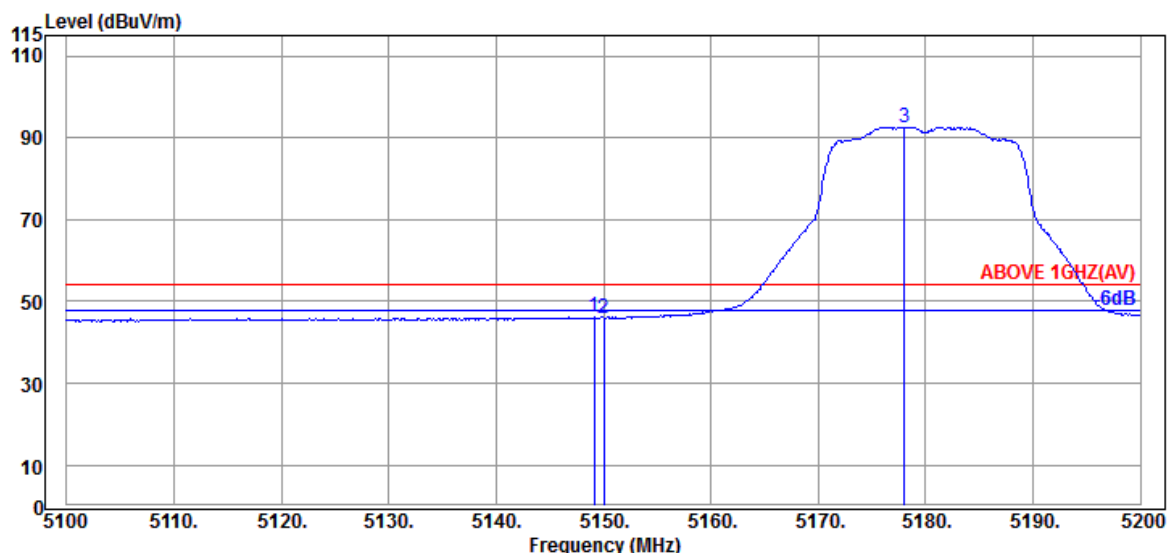

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.20	8.92	34.35	37.31	46.08	54.00	7.92	Average
5150.000	34.20	8.92	34.35	37.22	45.99	54.00	8.01	Average
@ 5178.000	34.20	8.95	34.34	83.86	92.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

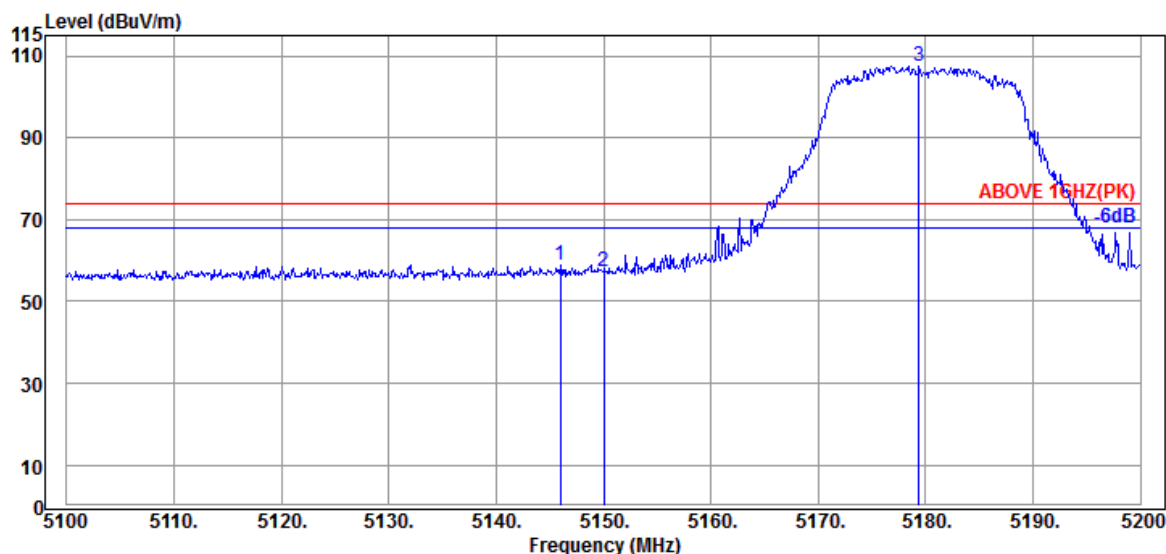

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.000	34.20	8.92	34.35	50.21	58.98	74.00	15.02	Peak
5150.000	34.20	8.92	34.35	48.56	57.33	74.00	16.67	Peak
@ 5179.400	34.20	8.95	34.34	98.76	107.57	---	---	Peak

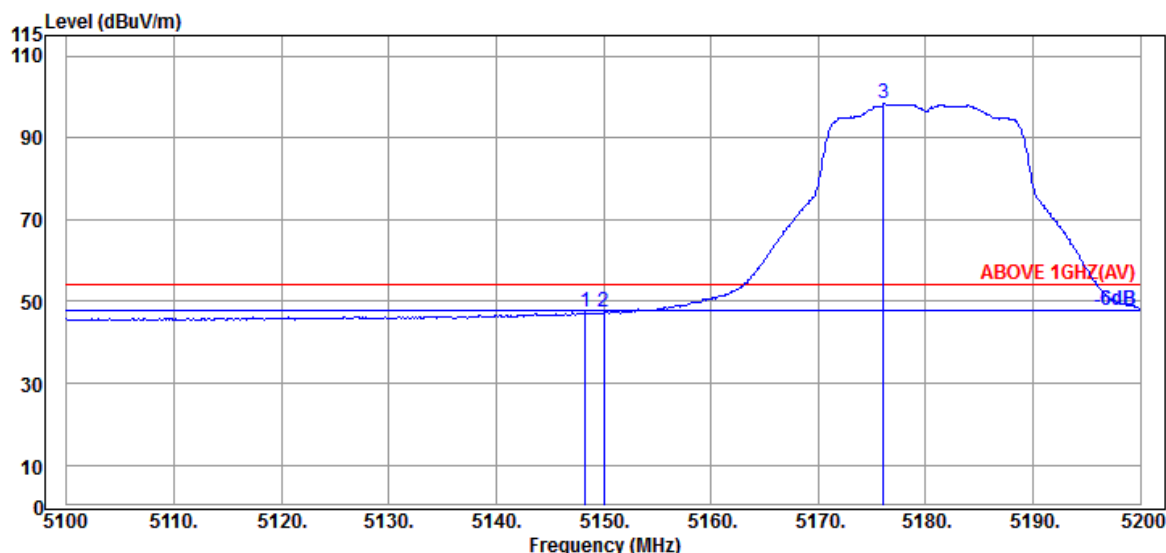

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.300	34.20	8.92	34.35	38.50	47.27	54.00	6.73	Average
5150.000	34.20	8.92	34.35	38.55	47.32	54.00	6.68	Average
@ 5176.100	34.20	8.95	34.34	89.41	98.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

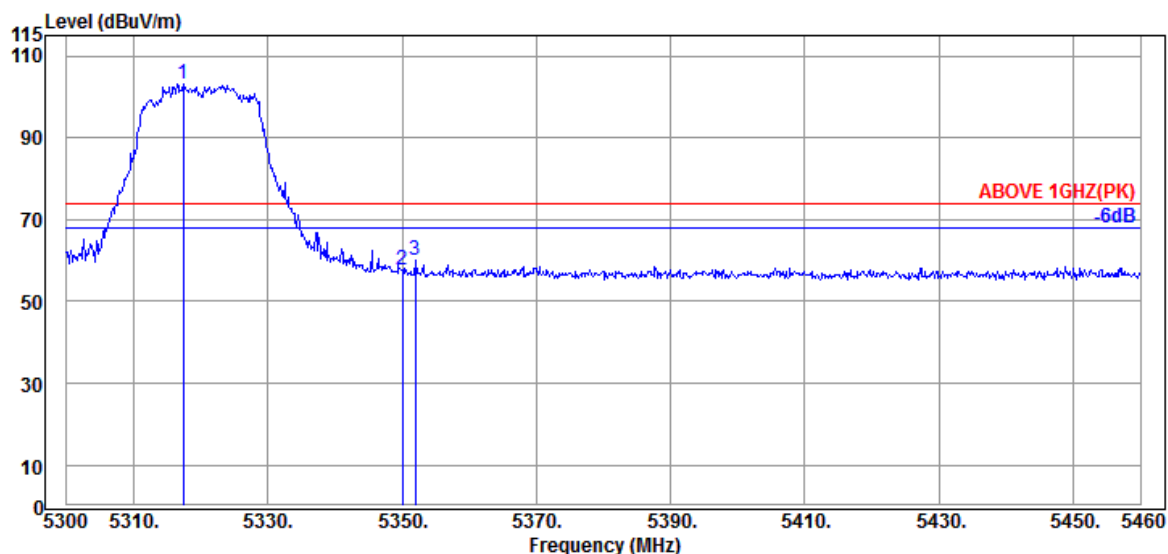

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.53	9.07	34.29	93.94	103.25	---	---	Peak
5350.080	34.60	9.10	34.27	48.43	57.86	74.00	16.14	Peak
5352.000	34.60	9.10	34.27	50.73	60.16	74.00	13.84	Peak

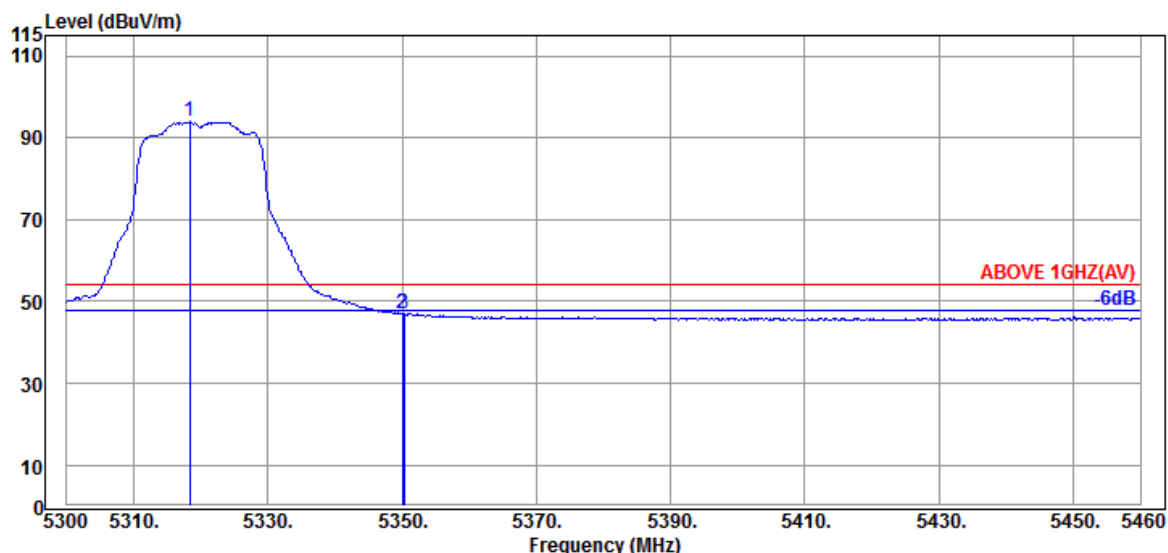

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	34.53	9.07	34.29	84.73	94.04	---	---	Average
5350.080	34.60	9.10	34.27	37.56	46.99	54.00	7.01	Average
5350.240	34.60	9.10	34.27	37.61	47.04	54.00	6.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

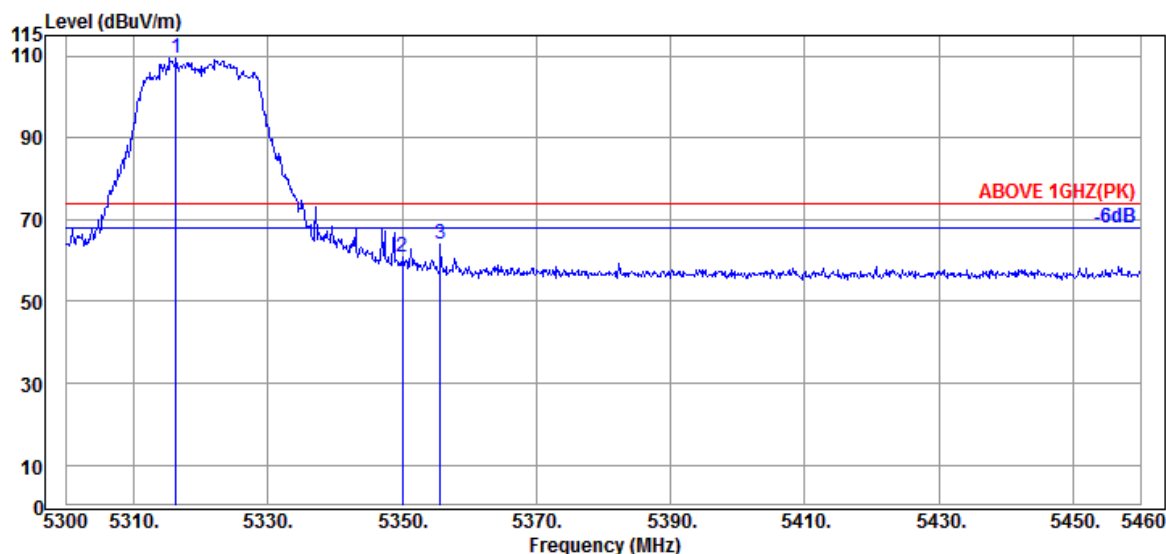

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.320	34.53	9.07	34.29	100.18	109.49	---	---	Peak
	5350.080	34.60	9.10	34.27	51.51	60.94	74.00	13.06	Peak
	5355.680	34.63	9.10	34.27	54.54	64.00	74.00	10.00	Peak

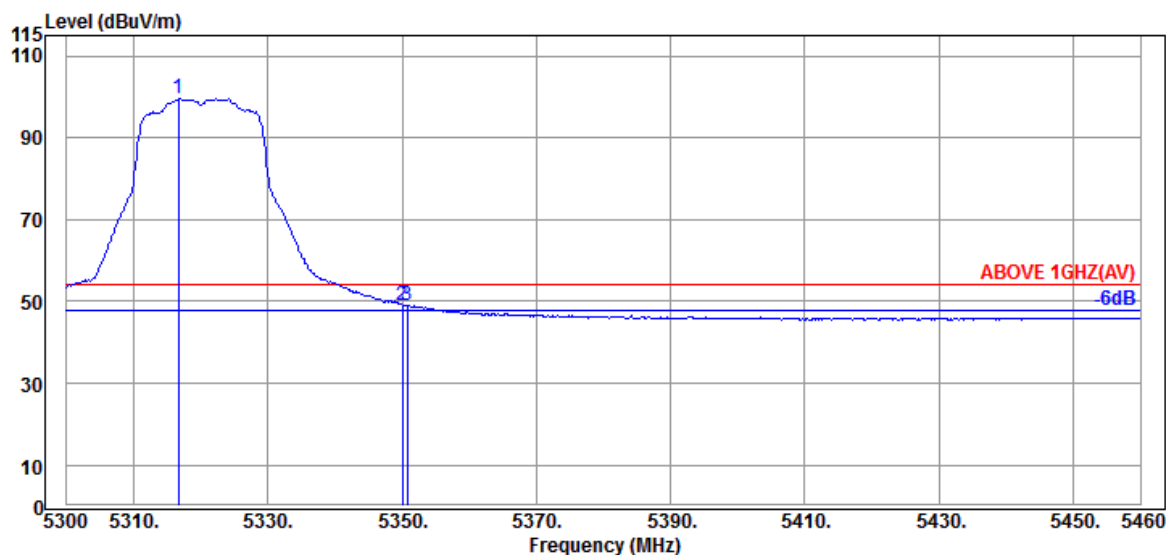

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.640	34.53	9.07	34.29	90.22	99.53	---	---	Average
	5350.080	34.60	9.10	34.27	39.73	49.16	54.00	4.84	Average
	5350.720	34.60	9.10	34.27	39.71	49.14	54.00	4.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

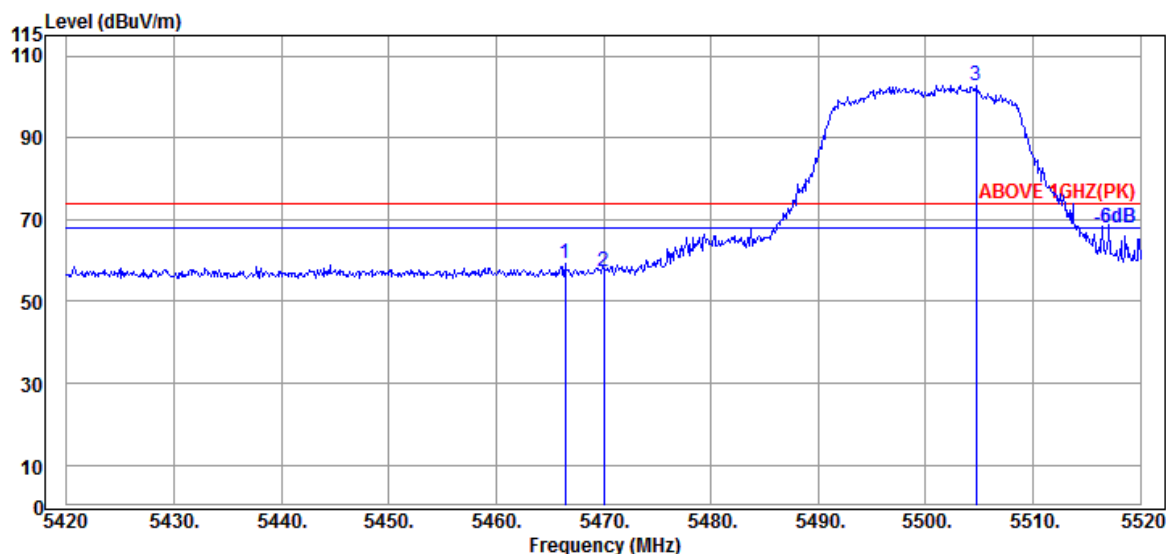

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.400	34.47	9.20	34.24	49.84	59.27	74.00	14.73	Peak
5470.000	34.47	9.20	34.24	47.74	57.17	74.00	16.83	Peak
@ 5504.700	34.40	9.23	34.24	93.37	102.76	---	---	Peak

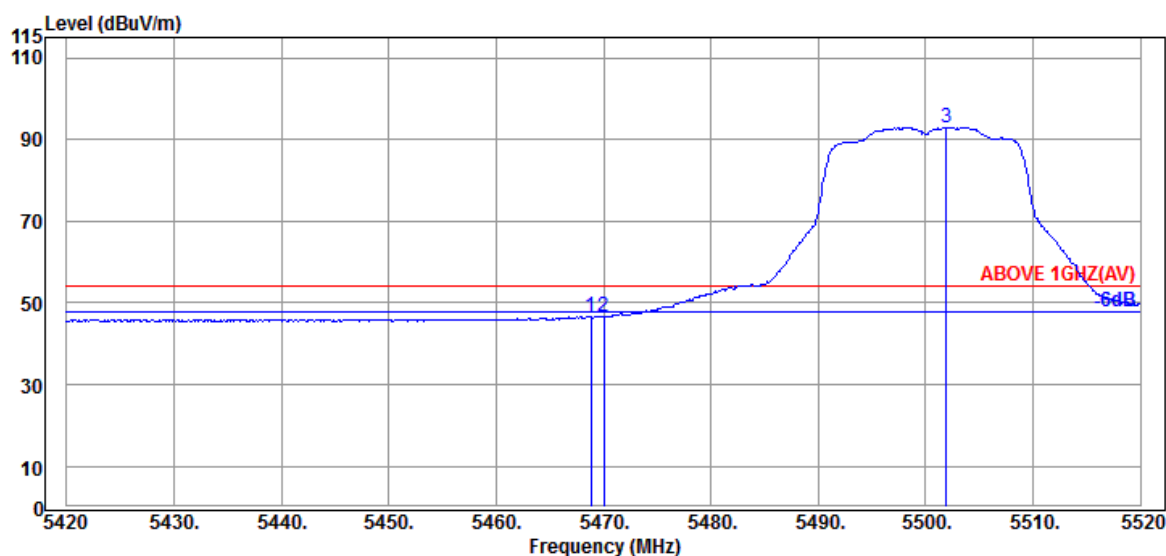

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.47	9.20	34.24	37.30	46.73	54.00	7.27	Average
5470.000	34.47	9.20	34.24	37.26	46.69	54.00	7.31	Average
@ 5501.900	34.40	9.23	34.24	83.63	93.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

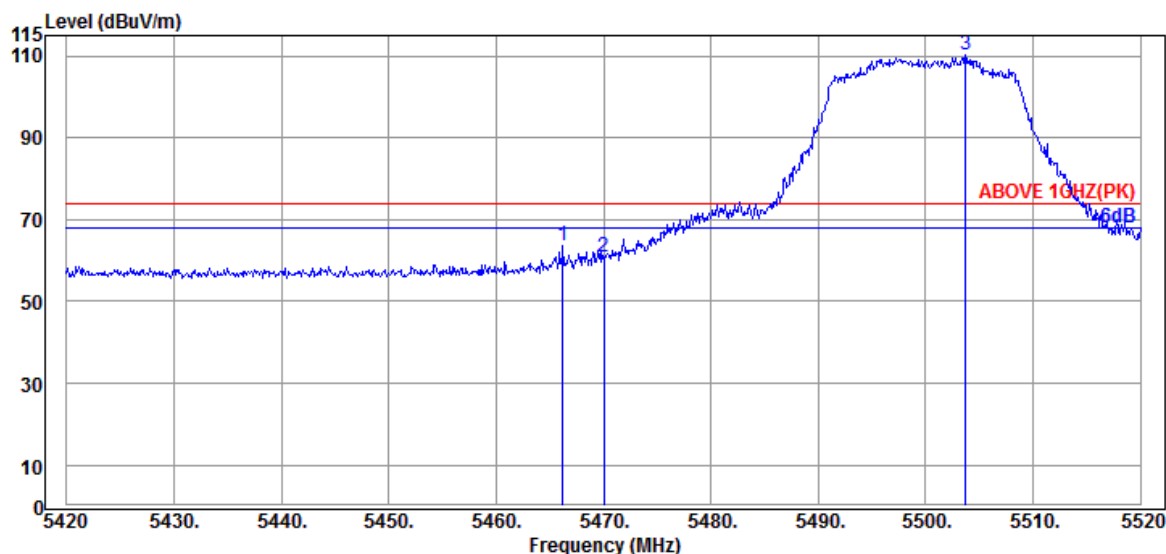

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.47	9.20	34.24	54.05	63.48	74.00	10.52	Peak
5470.000	34.47	9.20	34.24	51.45	60.88	74.00	13.12	Peak
@ 5503.700	34.40	9.23	34.24	100.87	110.26	---	---	Peak

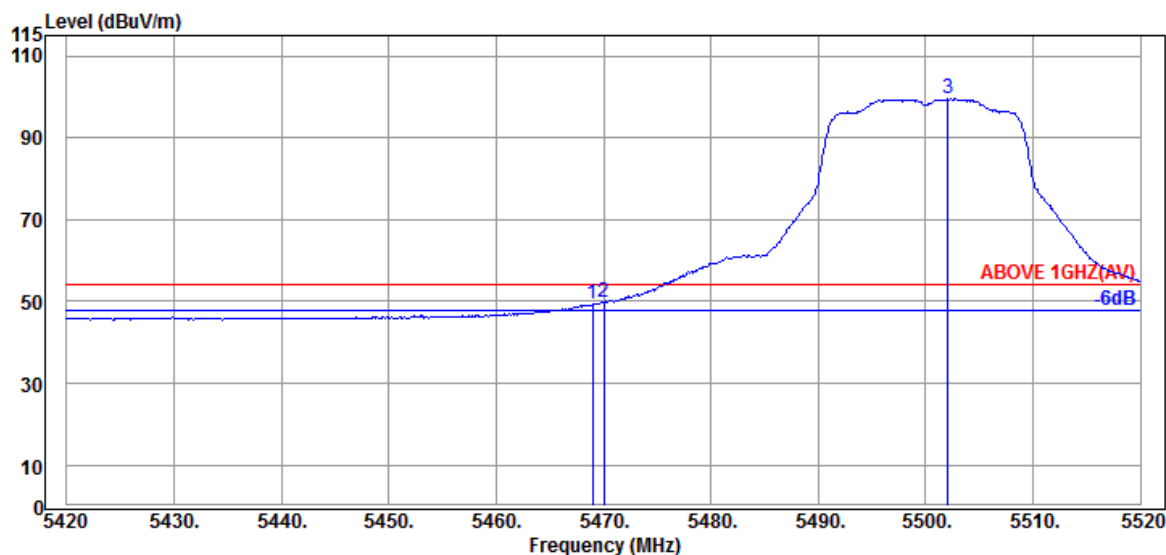

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	9.20	34.24	39.87	49.30	54.00	4.70	Average
5470.000	34.47	9.20	34.24	40.30	49.73	54.00	4.27	Average
@ 5502.100	34.40	9.23	34.24	90.22	99.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

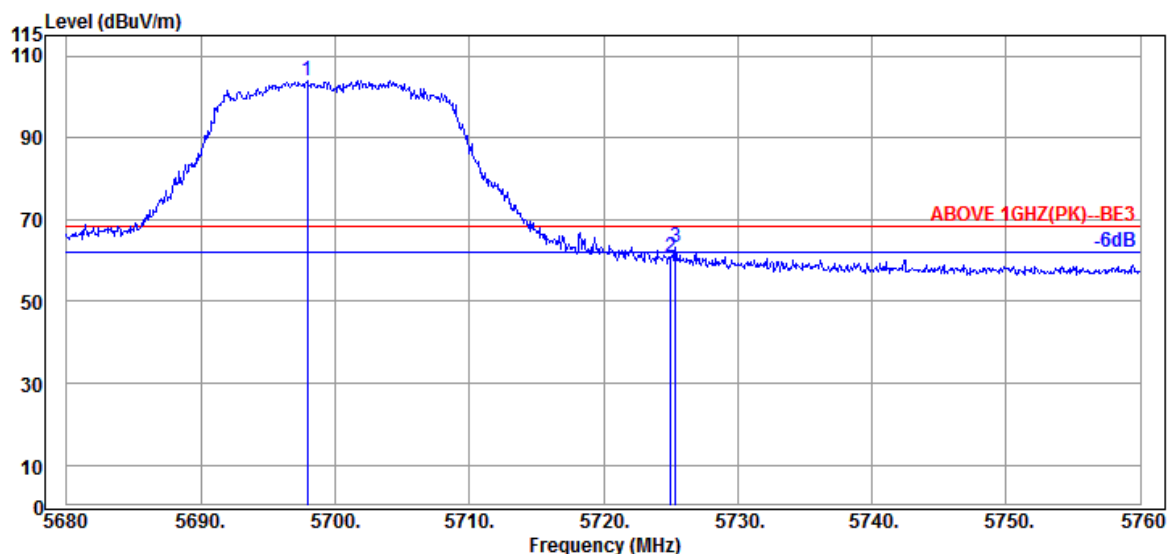

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5697.920	34.40	9.39	34.31	94.49	103.97	---	---	Peak
	5725.040	34.67	9.42	34.32	50.97	60.74	68.20	7.46	Peak
	5725.360	34.67	9.42	34.32	53.41	63.18	68.20	5.02	Peak

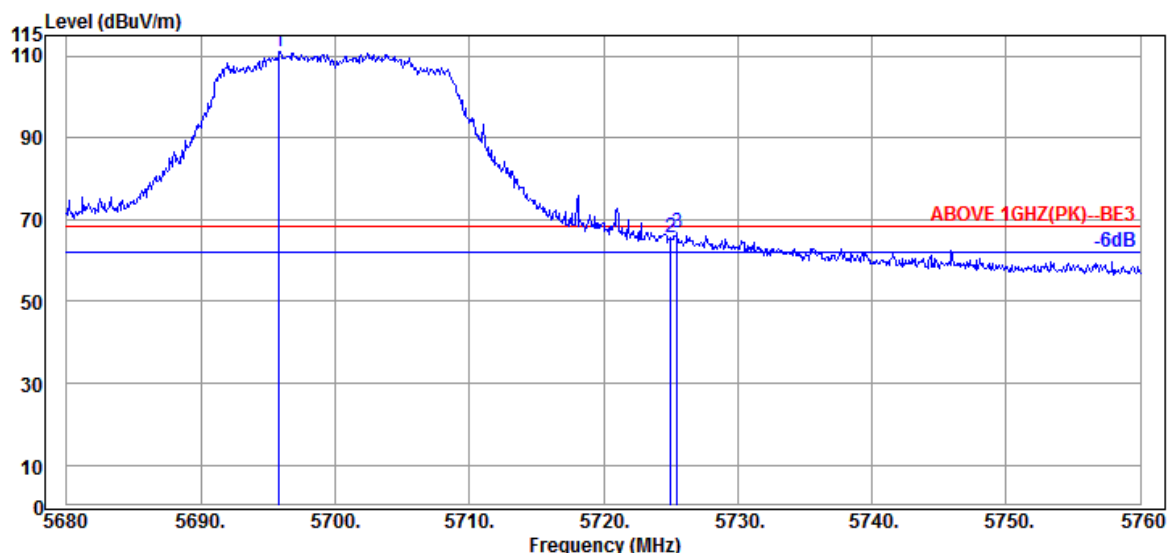

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5695.840	34.40	9.39	34.31	101.48	110.96	---	---	Peak
	5725.040	34.67	9.42	34.32	56.00	65.77	68.20	2.43	Peak
	5725.520	34.67	9.42	34.32	56.89	66.66	68.20	1.54	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

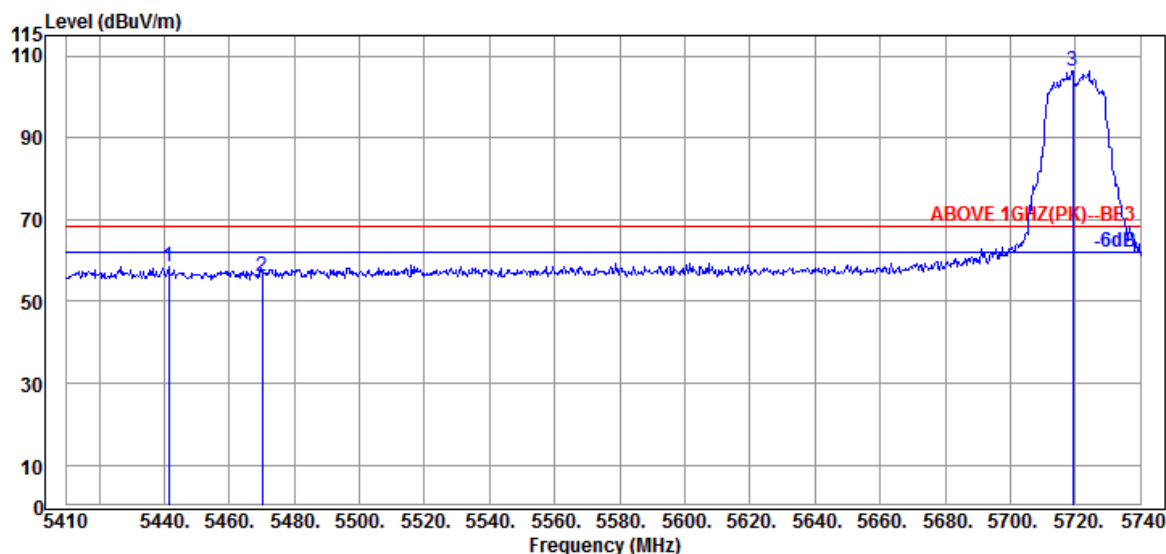

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.350	34.55	9.17	34.25	48.97	58.44	68.20	9.76	Peak
5470.060	34.47	9.20	34.24	46.75	56.18	68.20	12.02	Peak
@ 5719.210	34.53	9.42	34.32	96.55	106.18	---	---	Peak

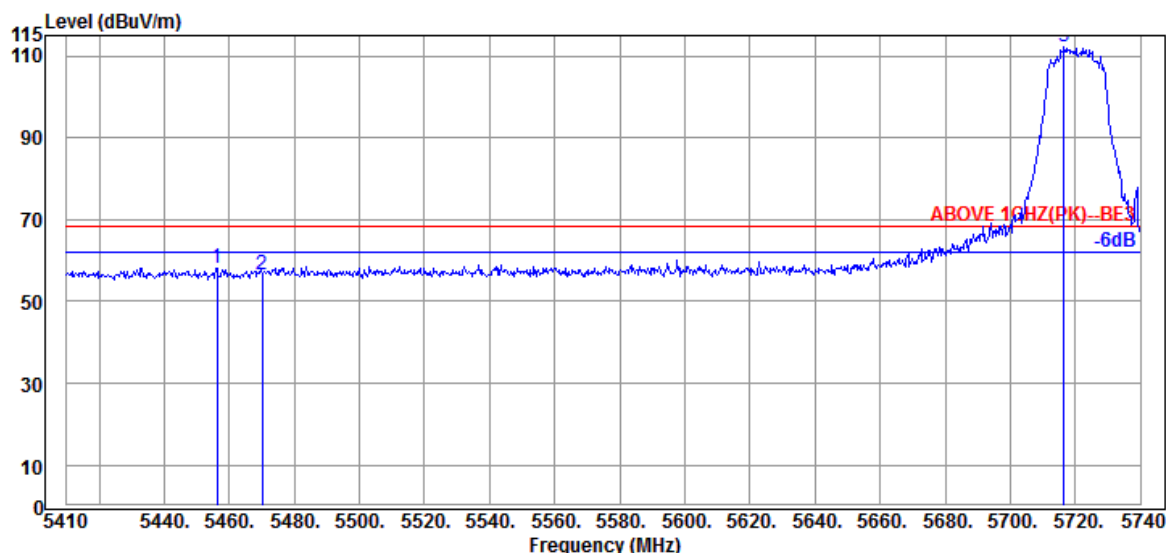

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.50	9.18	34.24	48.77	58.21	68.20	9.99	Peak
5470.060	34.47	9.20	34.24	47.08	56.51	68.20	11.69	Peak
@ 5716.570	34.53	9.40	34.32	102.59	112.20	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

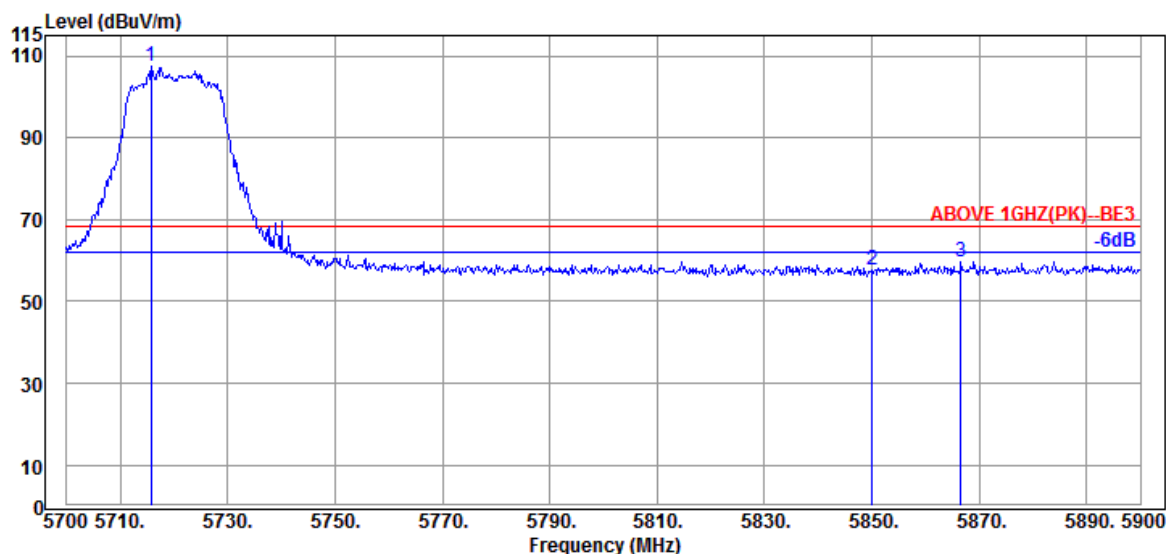

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5715.800	34.53	9.40	34.32	97.78	107.39	---	---	Peak
	5850.000	35.10	9.52	34.38	47.30	57.54	68.20	10.66	Peak
	5866.600	35.20	9.53	34.39	49.49	59.83	68.20	8.37	Peak

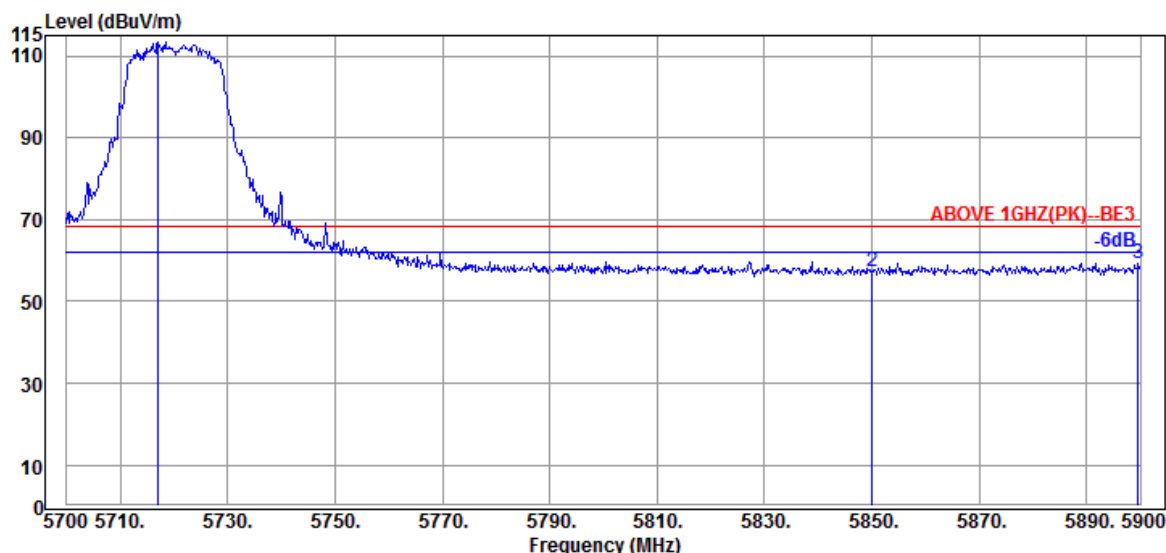

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.000	34.53	9.40	34.32	103.86	113.47	---	---	Peak
	5850.000	35.10	9.52	34.38	47.07	57.31	68.20	10.89	Peak
	5899.600	35.40	9.56	34.40	48.89	59.45	68.20	8.75	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

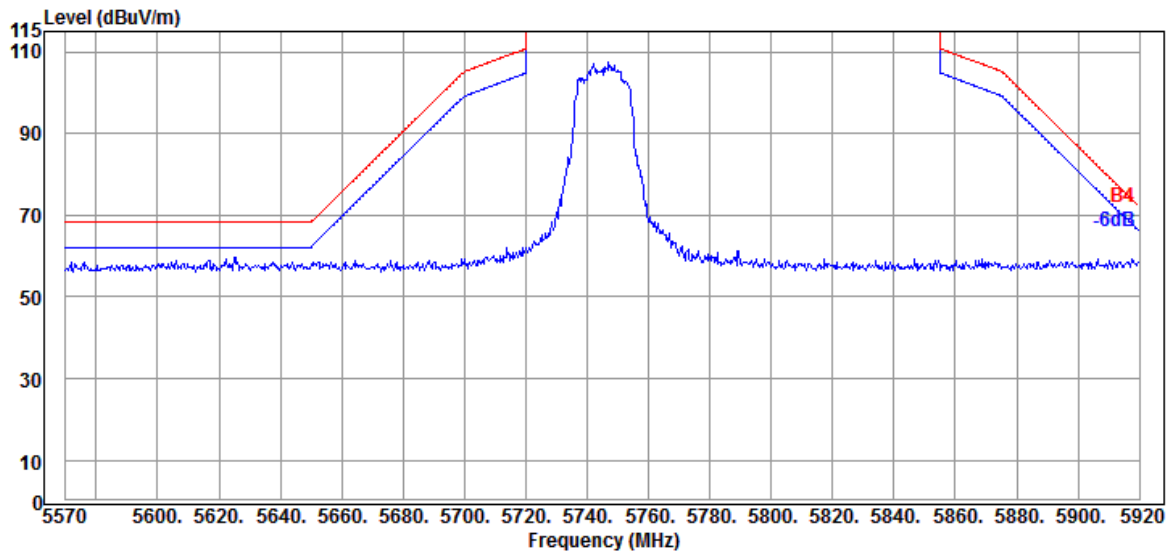

Antenna at Vertical Polarization

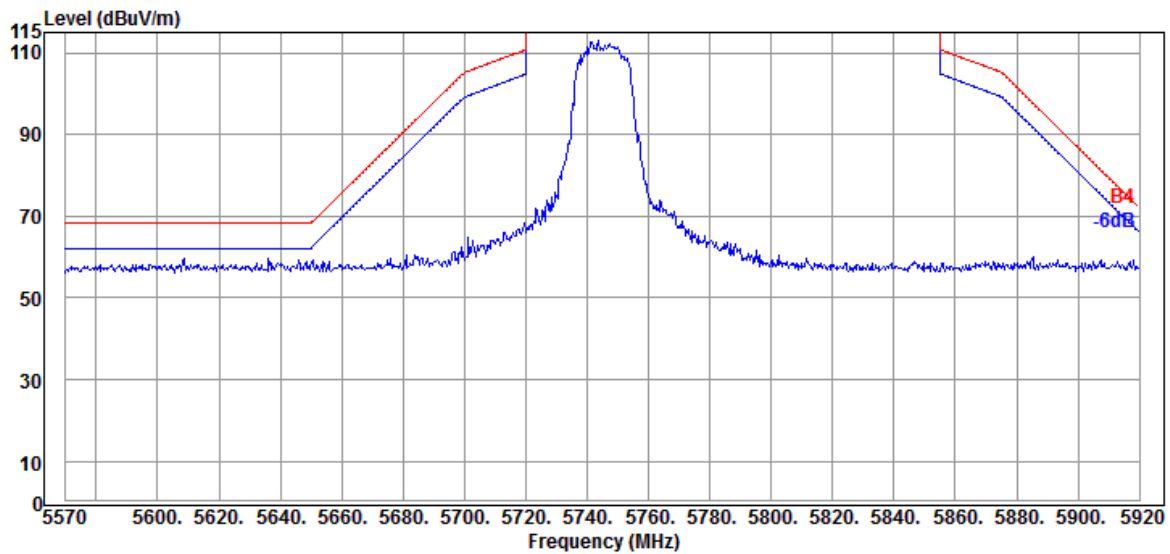


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

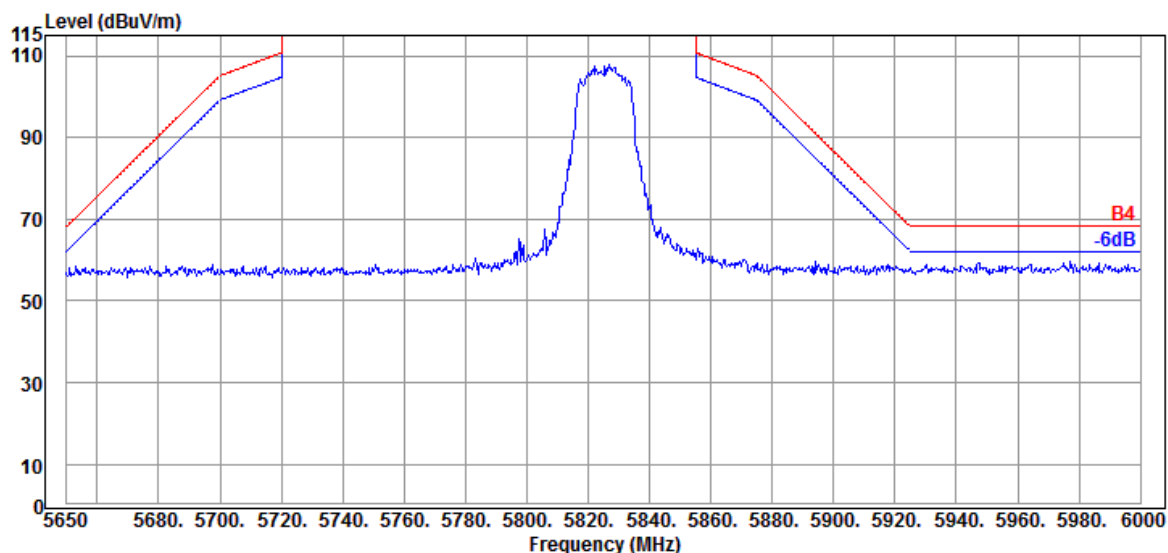

Antenna at Vertical Polarization

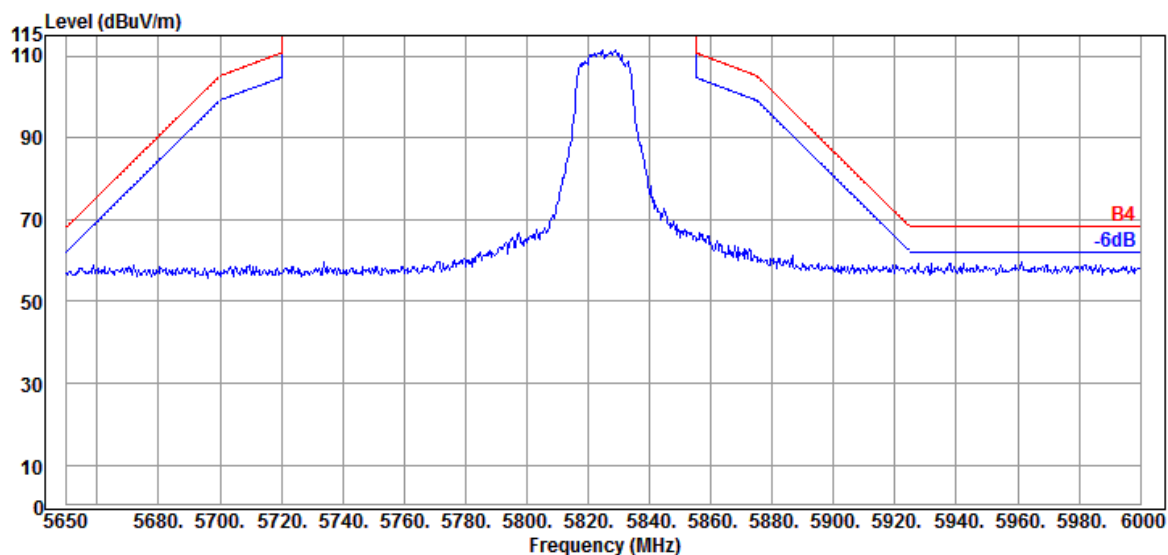

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

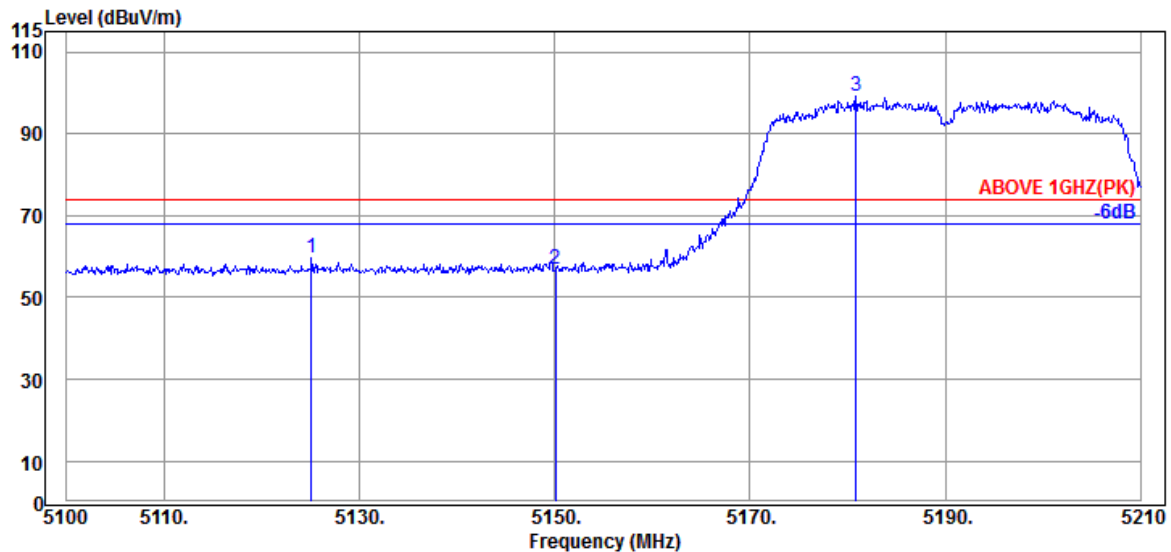

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.080	34.13	8.91	34.36	51.04	59.72	74.00	14.28	Peak
5150.050	34.20	8.92	34.35	48.03	56.80	74.00	17.20	Peak
@ 5180.850	34.20	8.95	34.34	90.23	99.04	---	---	Peak

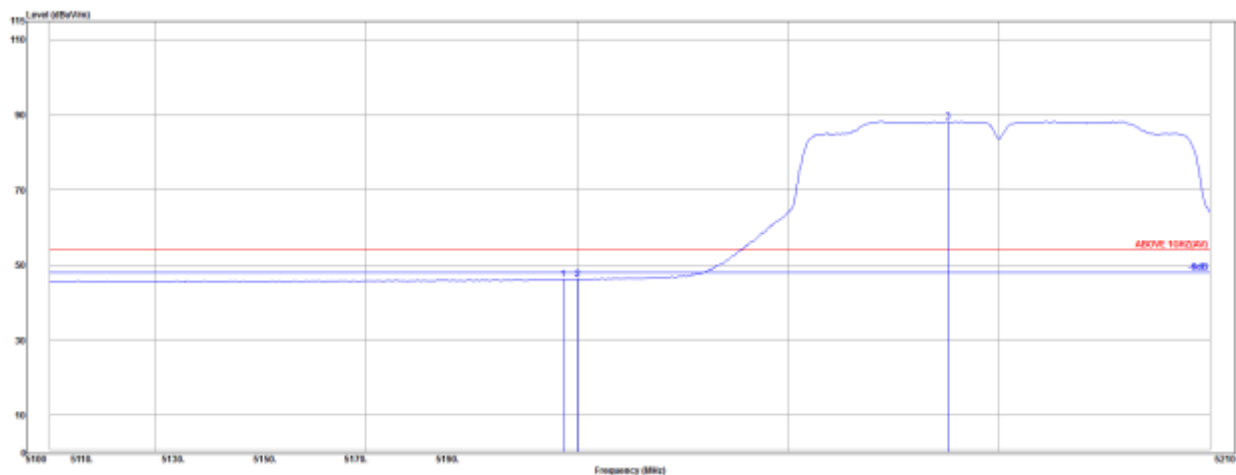

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	34.20	8.92	34.35	37.40	46.17	54.00	7.83	Average
5150.050	34.20	8.92	34.35	37.33	46.10	54.00	7.90	Average
@ 5185.140	34.20	8.95	34.34	79.46	88.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

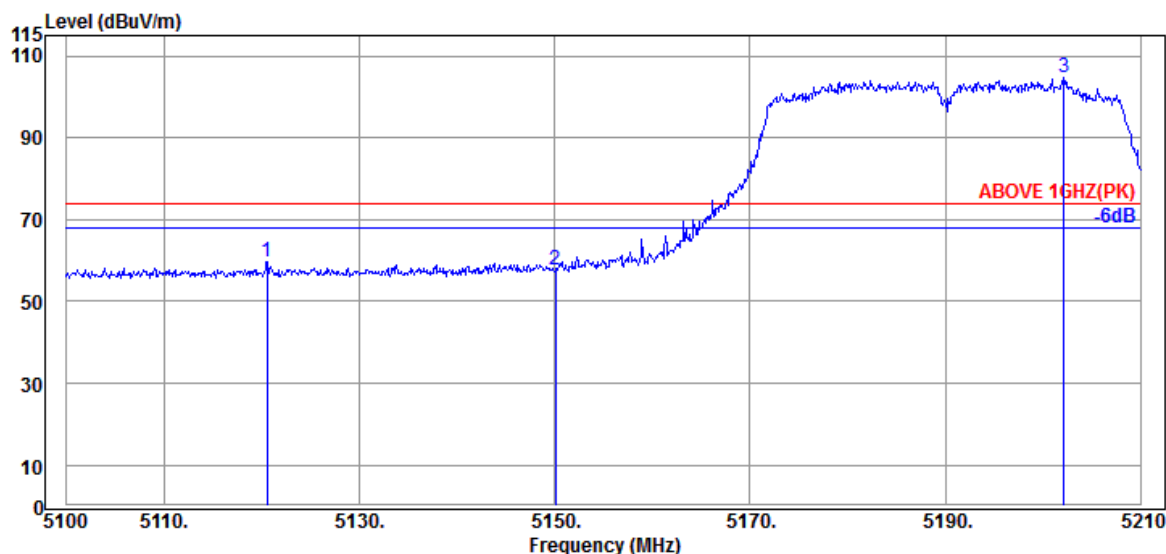

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.570	34.13	8.89	34.36	51.20	59.86	74.00	14.14	Peak
5150.050	34.20	8.92	34.35	48.97	57.74	74.00	16.26	Peak
@ 5202.190	34.25	8.96	34.33	95.89	104.77	---	---	Peak

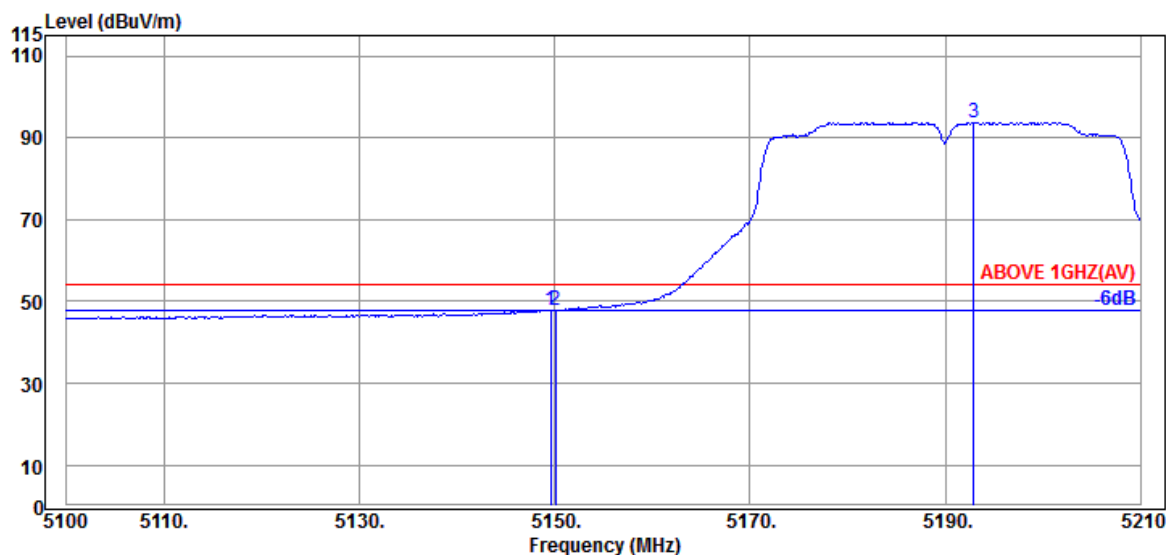

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.20	8.92	34.35	39.13	47.90	54.00	6.10	Average
5150.050	34.20	8.92	34.35	39.02	47.79	54.00	6.21	Average
@ 5192.950	34.20	8.96	34.34	84.99	93.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

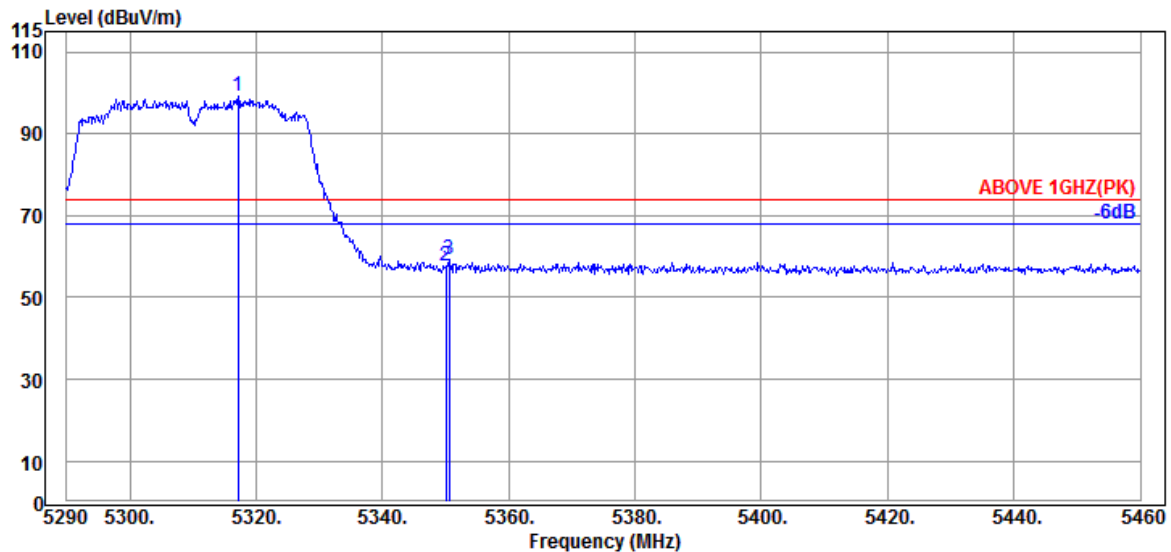

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.53	9.07	34.29	89.83	99.14	---	---	Peak
5350.010	34.60	9.10	34.27	48.39	57.82	74.00	16.18	Peak
5350.520	34.60	9.10	34.27	49.76	59.19	74.00	14.81	Peak

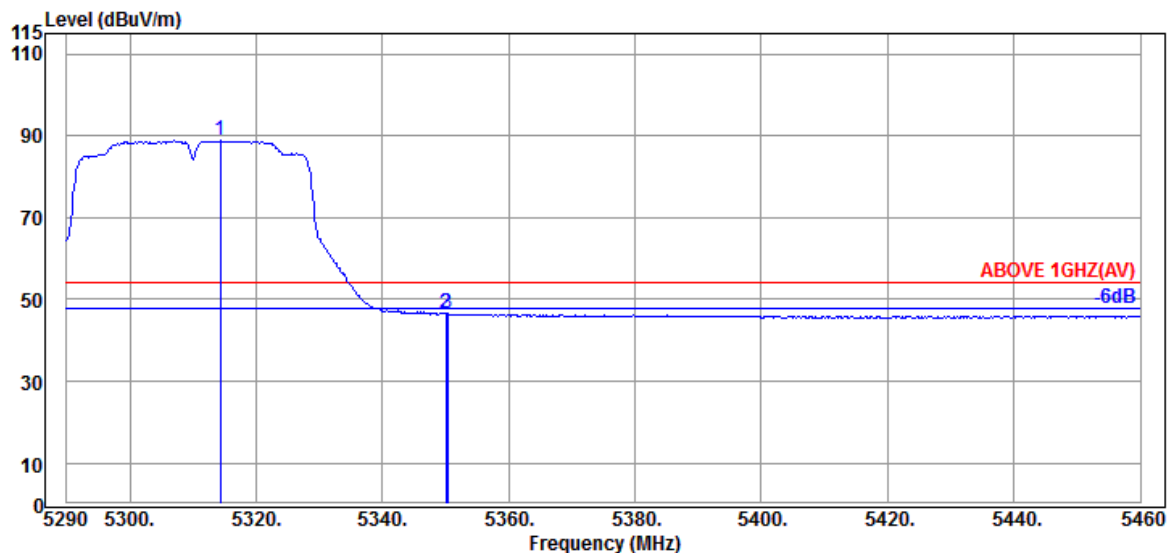

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.310	34.53	9.07	34.29	79.50	88.81	---	---	Average
5350.010	34.60	9.10	34.27	37.11	46.54	54.00	7.46	Average
5350.350	34.60	9.10	34.27	37.05	46.48	54.00	7.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239


Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

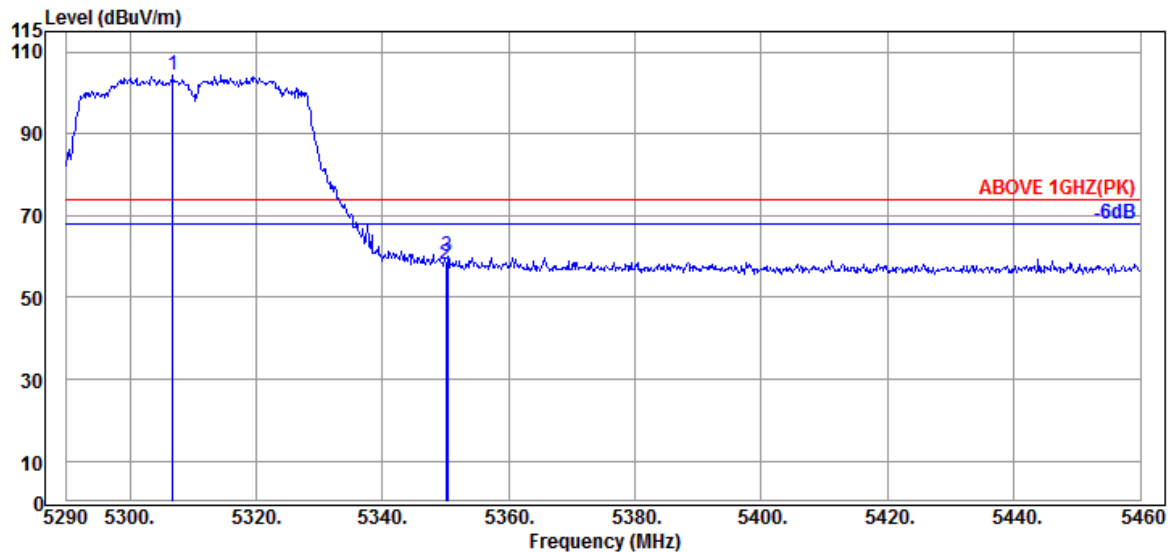

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5306.830	34.50	9.05	34.29	94.98	104.24	---	---	Peak
	5350.010	34.60	9.10	34.27	48.79	58.22	74.00	15.78	Peak
	5350.350	34.60	9.10	34.27	50.67	60.10	74.00	13.90	Peak

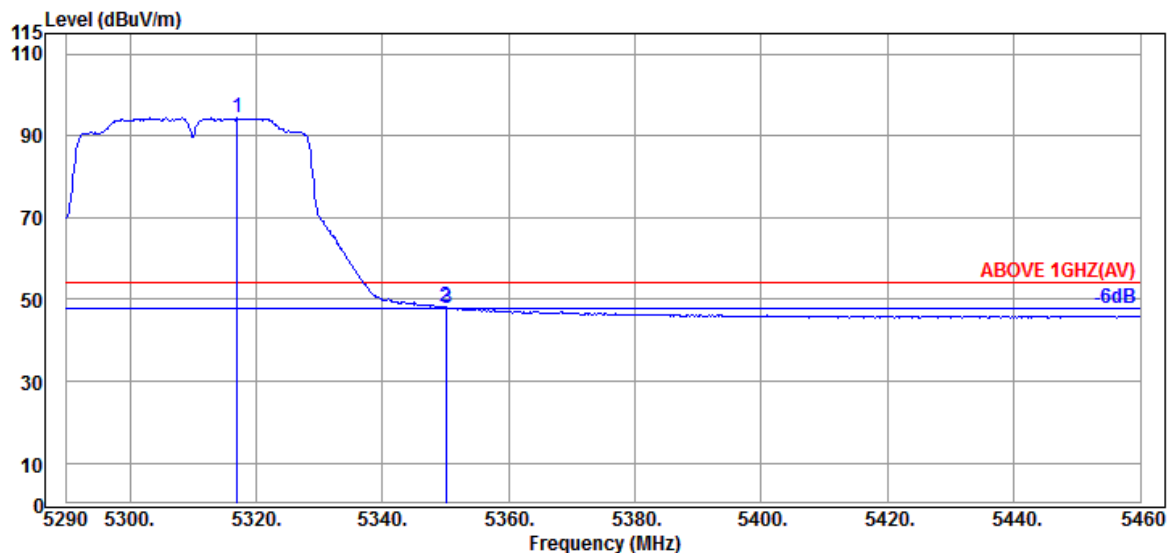

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.030	34.53	9.07	34.29	85.10	94.41	---	---	Average
	5350.010	34.60	9.10	34.27	38.63	48.06	54.00	5.94	Average
	5350.180	34.60	9.10	34.27	38.56	47.99	54.00	6.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

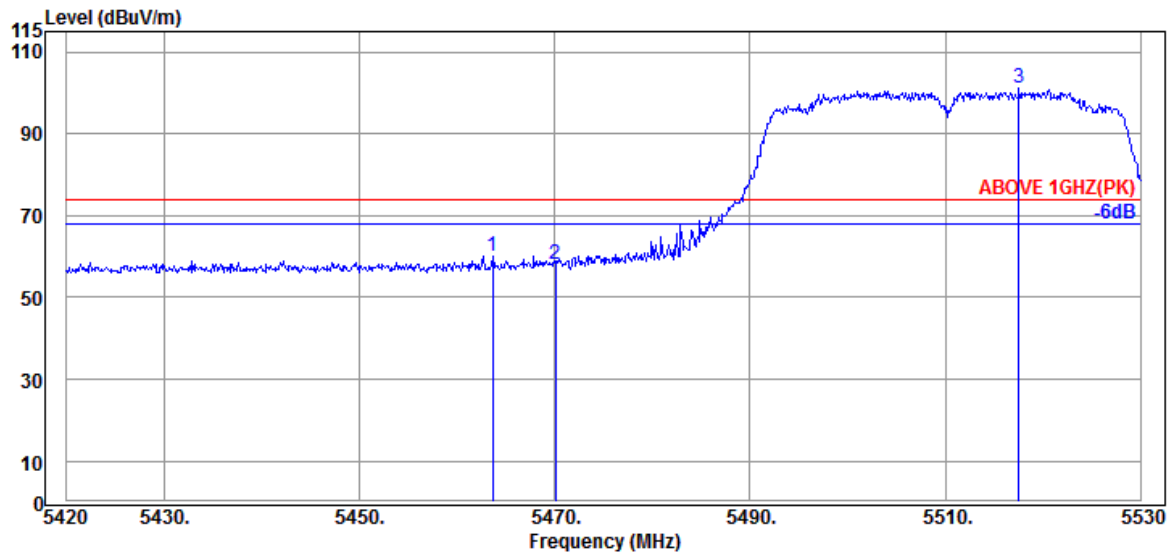

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.670	34.47	9.20	34.24	50.77	60.20	74.00	13.80	Peak
5470.050	34.47	9.20	34.24	48.70	58.13	74.00	15.87	Peak
@ 5517.570	34.37	9.24	34.24	91.90	101.27	---	---	Peak

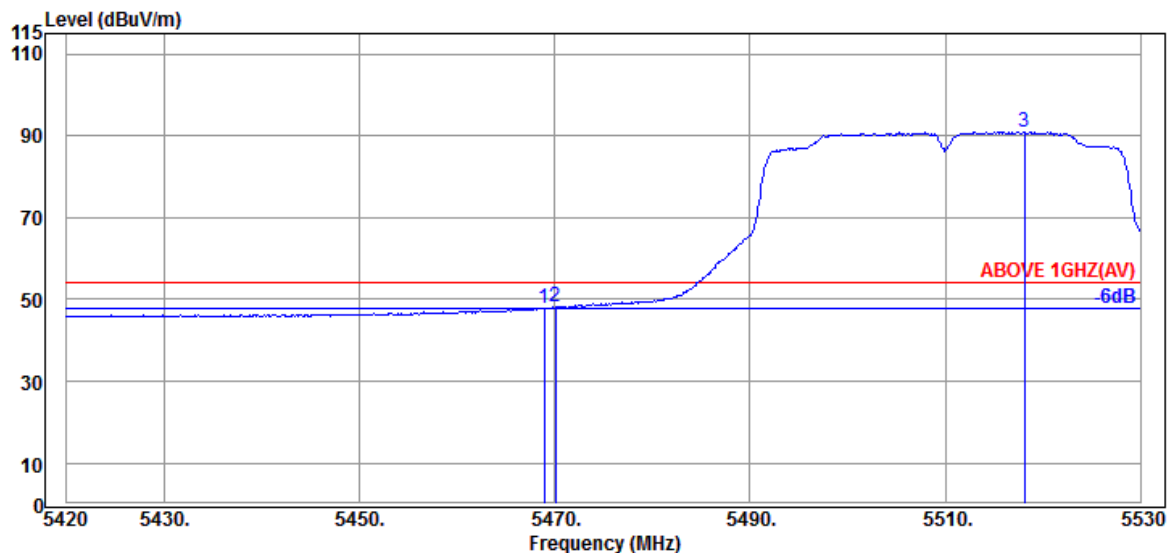

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	9.20	34.24	38.58	48.01	54.00	5.99	Average
5470.050	34.47	9.20	34.24	38.61	48.04	54.00	5.96	Average
@ 5518.120	34.37	9.24	34.24	81.62	90.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

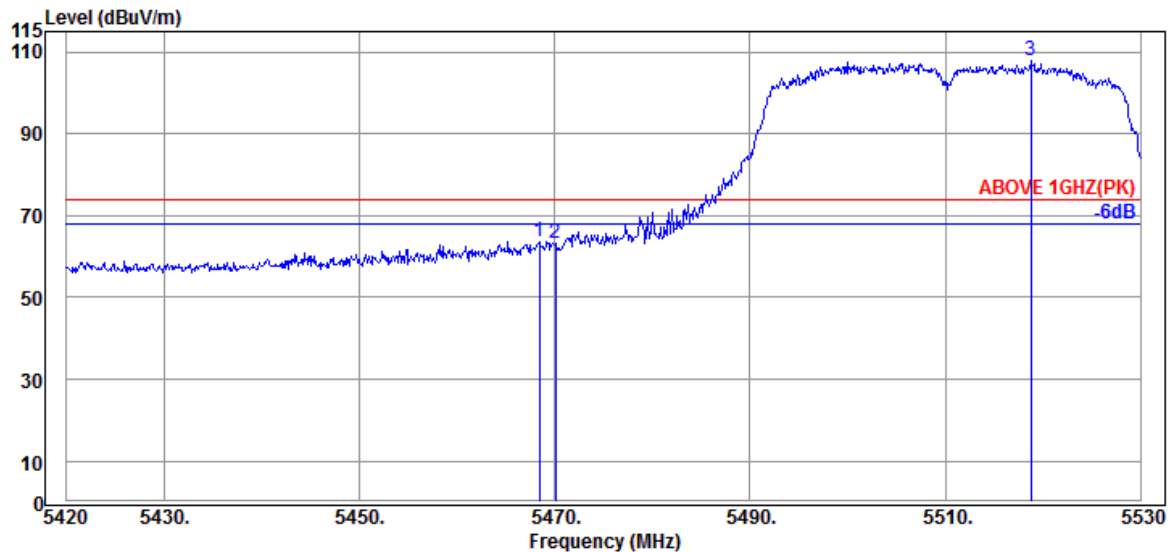

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.47	9.20	34.24	54.32	63.75	74.00	10.25	Peak
5470.050	34.47	9.20	34.24	53.60	63.03	74.00	10.97	Peak
@ 5518.780	34.37	9.24	34.24	98.51	107.88	---	---	Peak

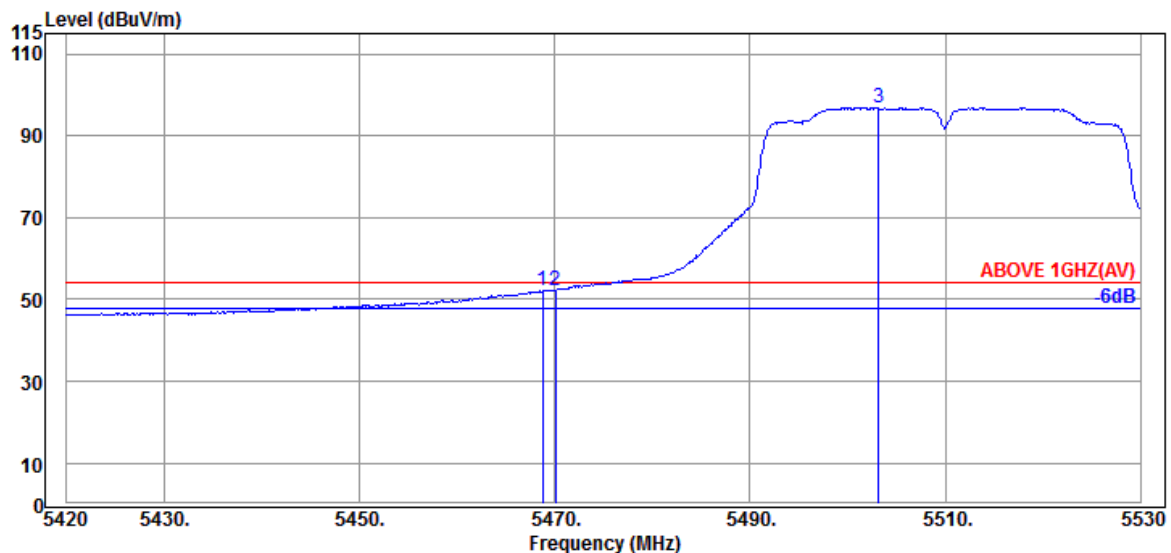

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	34.47	9.20	34.24	42.66	52.09	54.00	1.91	Average
5470.050	34.47	9.20	34.24	42.85	52.28	54.00	1.72	Average
@ 5503.160	34.40	9.23	34.24	87.53	96.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

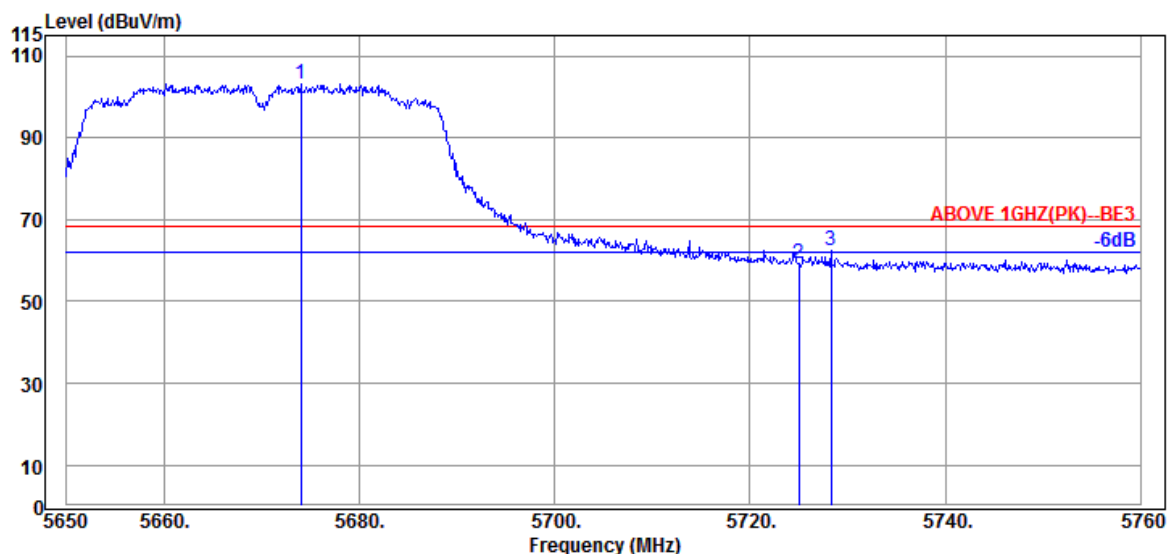

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5673.980	34.40	9.37	34.30	93.56	103.03	---	---	Peak
	5725.020	34.67	9.42	34.32	49.70	59.47	68.20	8.73	Peak
	5728.320	34.67	9.42	34.32	52.59	62.36	68.20	5.84	Peak

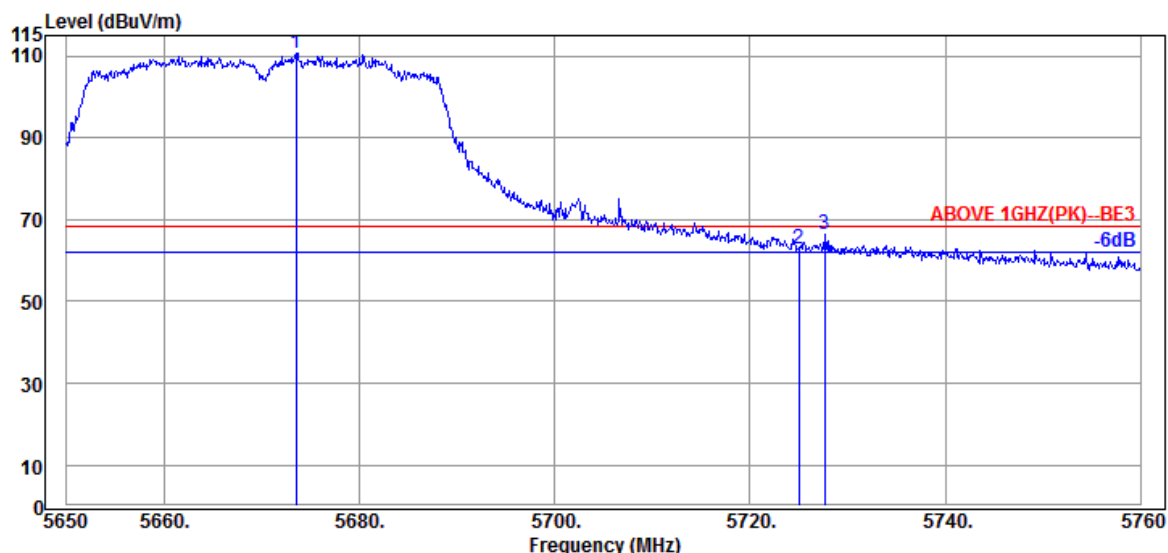

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5673.540	34.40	9.37	34.30	101.33	110.80	---	---	Peak
	5725.020	34.67	9.42	34.32	53.25	63.02	68.20	5.18	Peak
	5727.660	34.67	9.42	34.32	56.48	66.25	68.20	1.95	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

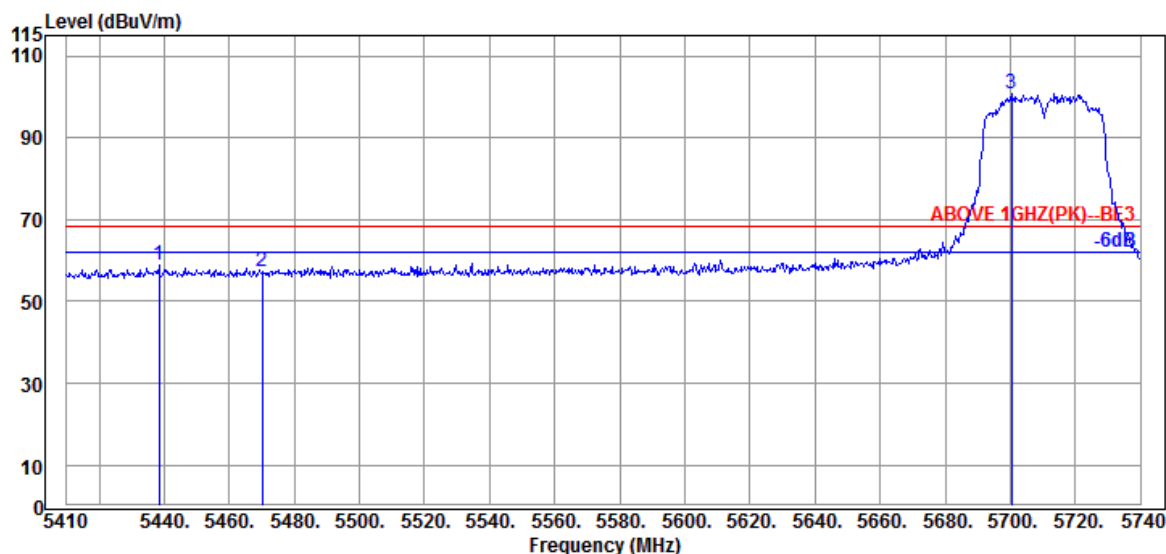

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.380	34.55	9.17	34.25	49.39	58.86	68.20	9.34	Peak
5470.060	34.47	9.20	34.24	47.76	57.19	68.20	11.01	Peak
@ 5700.400	34.40	9.39	34.31	91.44	100.92	---	---	Peak

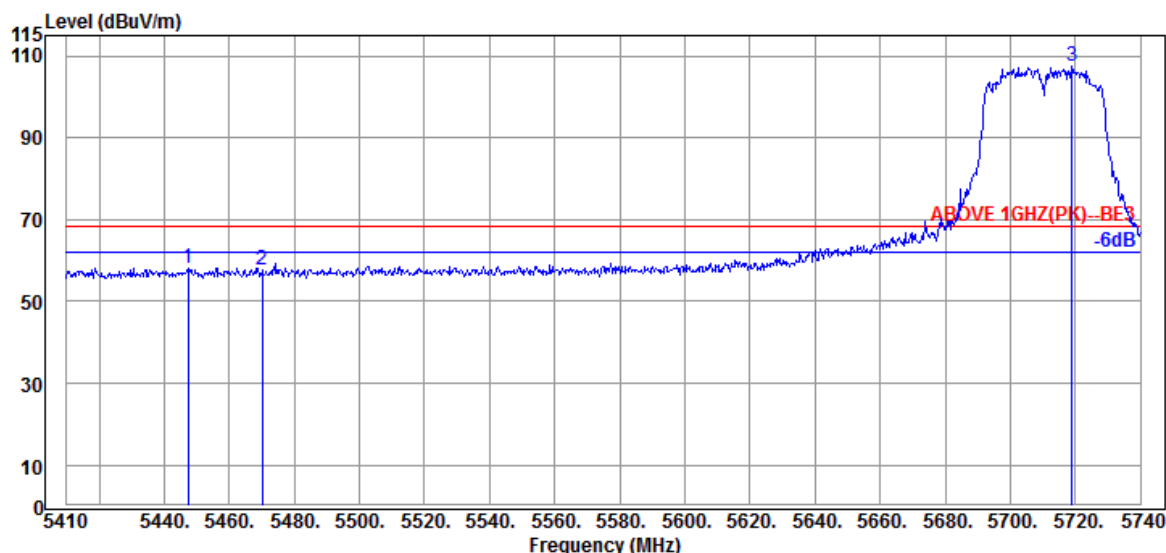

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.290	34.55	9.18	34.25	48.81	58.29	68.20	9.91	Peak
5470.060	34.47	9.20	34.24	48.10	57.53	68.20	10.67	Peak
@ 5718.880	34.53	9.42	34.32	97.70	107.33	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

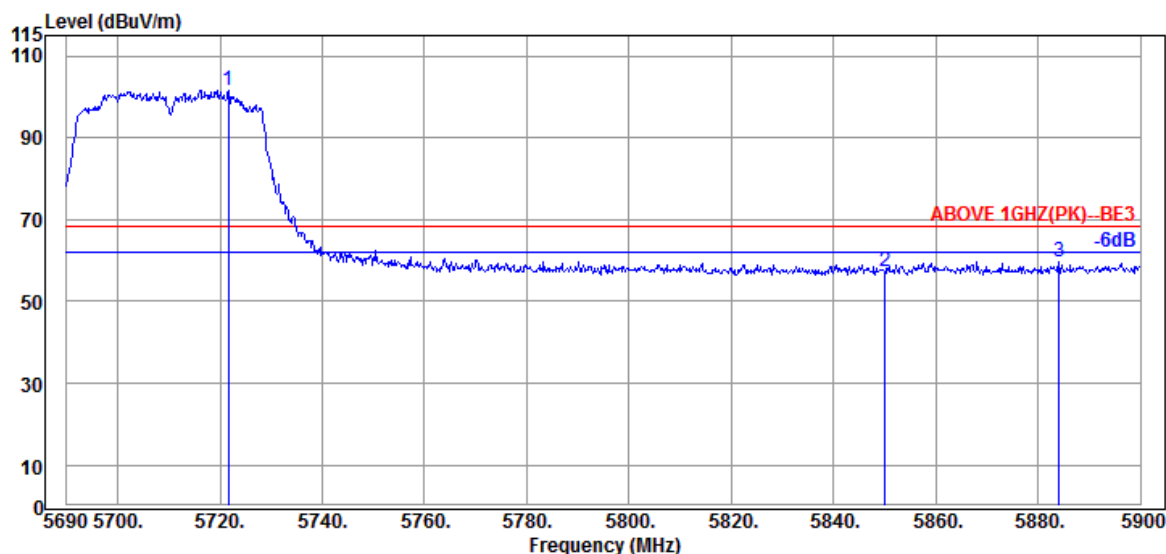

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5721.710	34.53	9.42	34.32	92.09	101.72	---	---	Peak
	5850.020	35.10	9.52	34.38	47.11	57.35	68.20	10.85	Peak
	5884.040	35.30	9.55	34.40	49.22	59.67	68.20	8.53	Peak

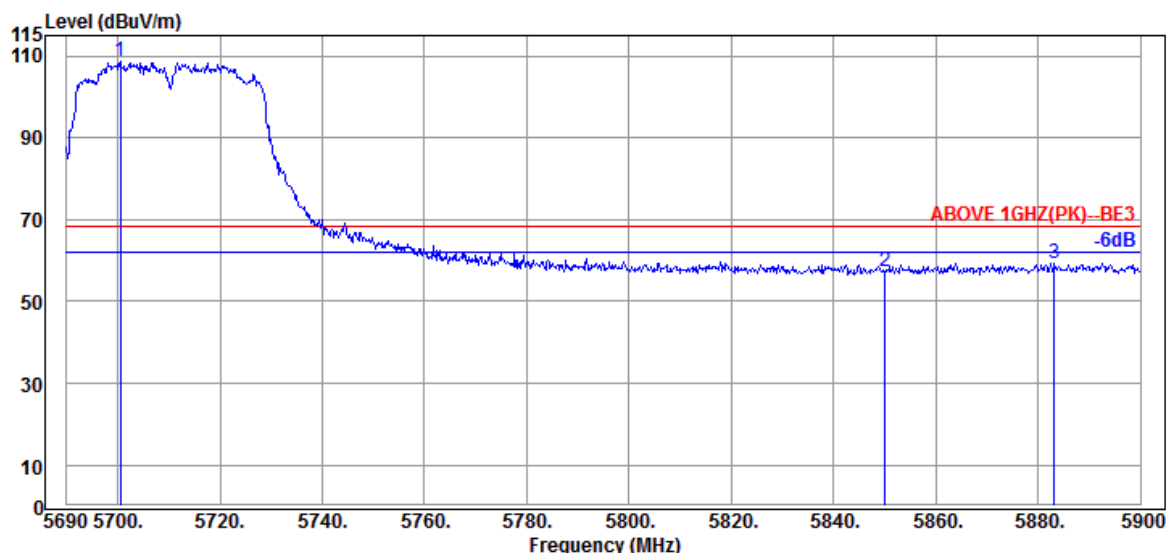

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5700.500	34.40	9.39	34.31	99.28	108.76	---	---	Peak
	5850.020	35.10	9.52	34.38	47.20	57.44	68.20	10.76	Peak
	5883.200	35.30	9.55	34.39	48.96	59.42	68.20	8.78	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

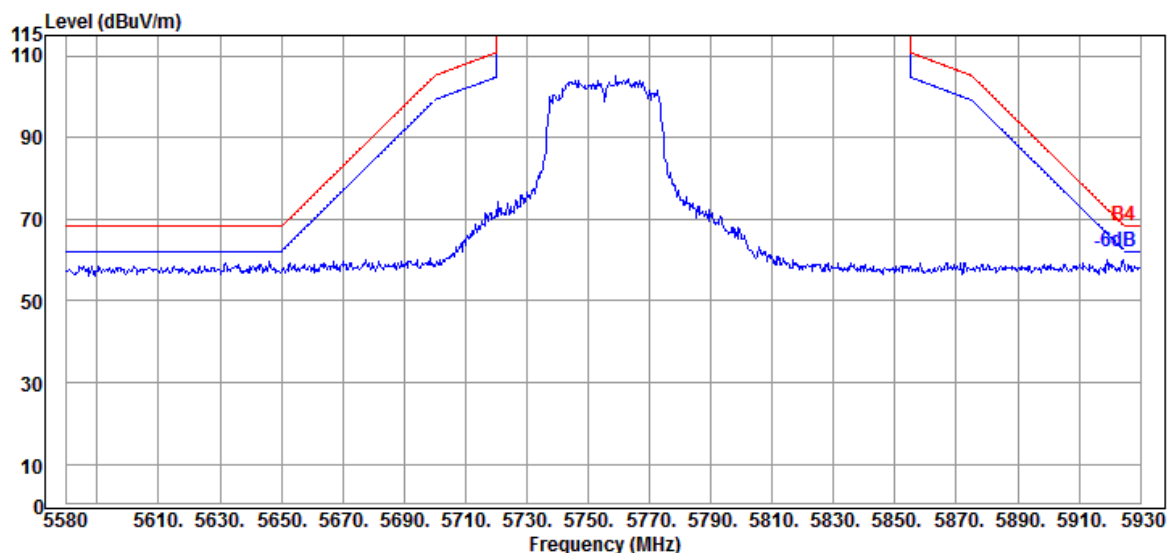

Antenna at Vertical Polarization

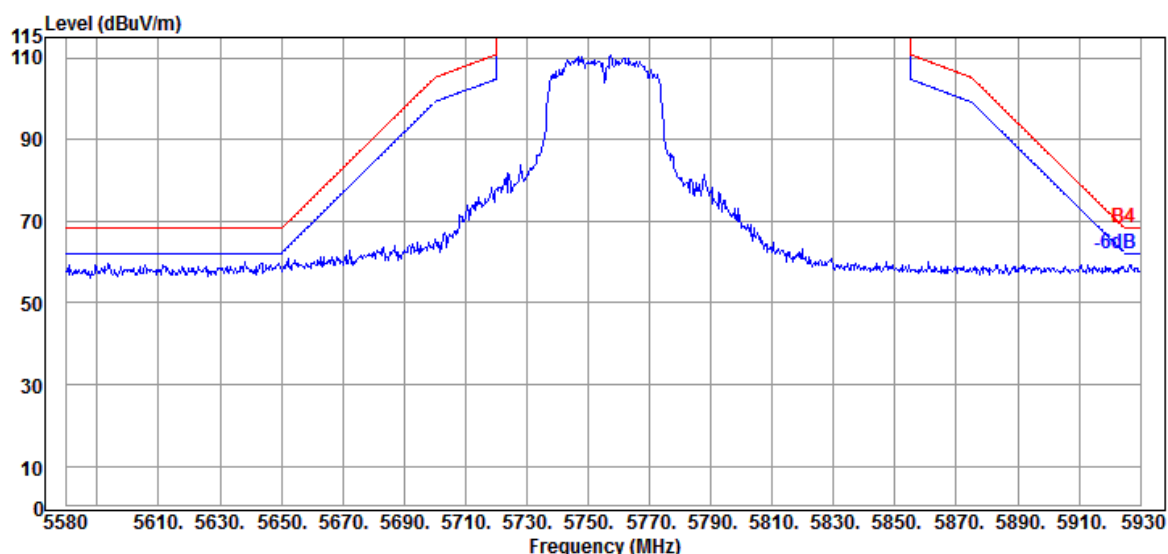


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

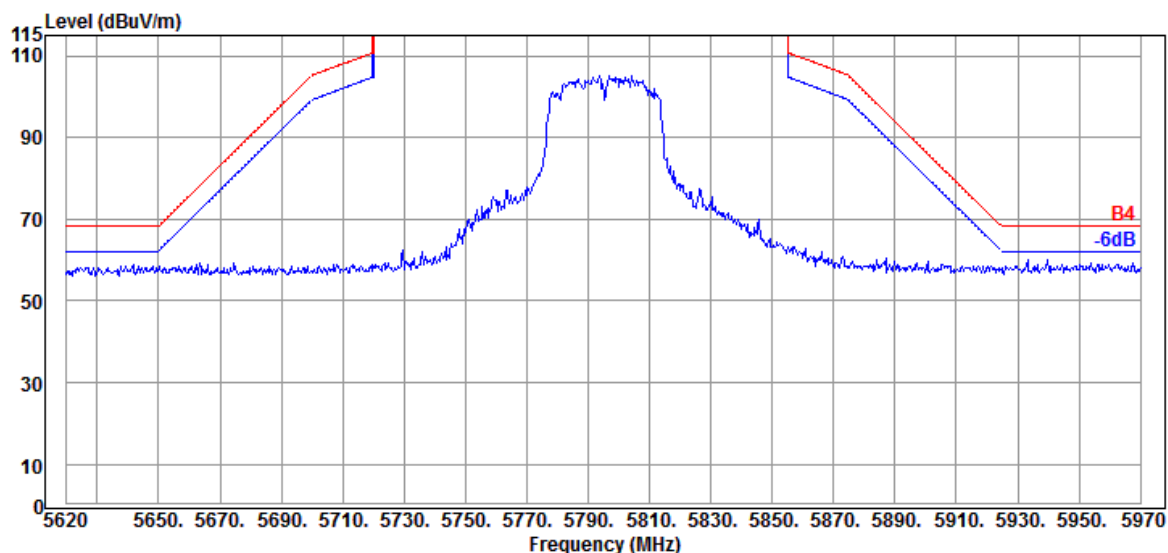

Antenna at Vertical Polarization

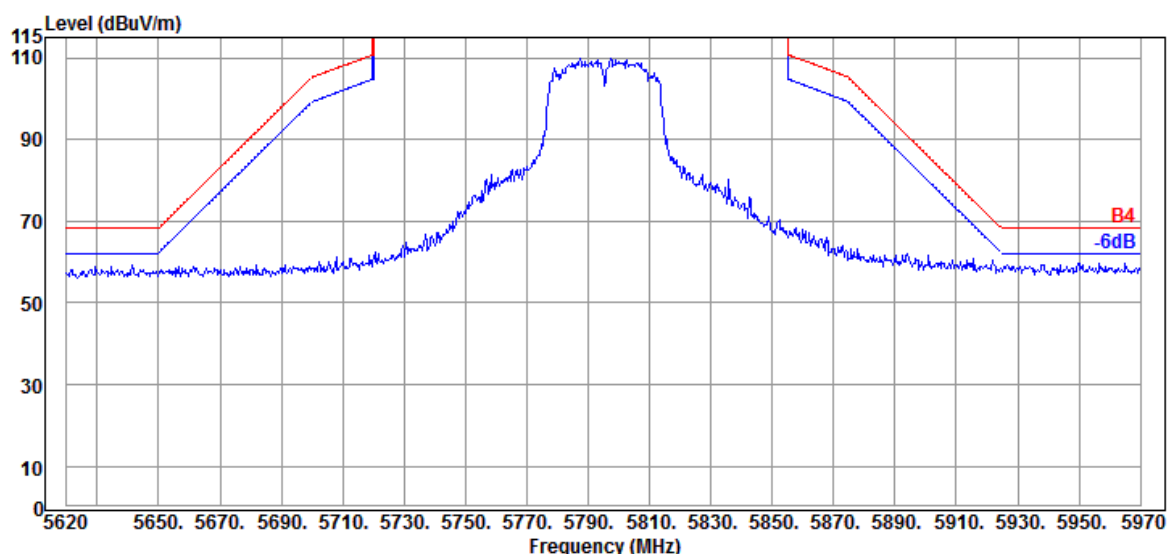

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

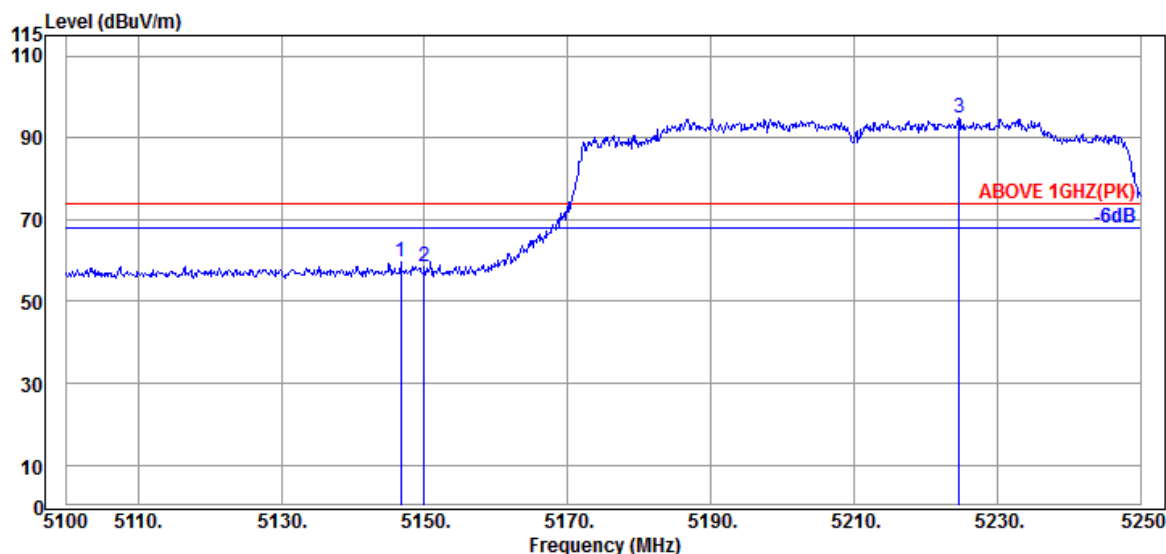

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.650	34.20	8.92	34.35	50.95	59.72	74.00	14.28	Peak
5149.950	34.20	8.92	34.35	49.83	58.60	74.00	15.40	Peak
@ 5224.650	34.30	8.99	34.32	85.79	94.76	---	---	Peak

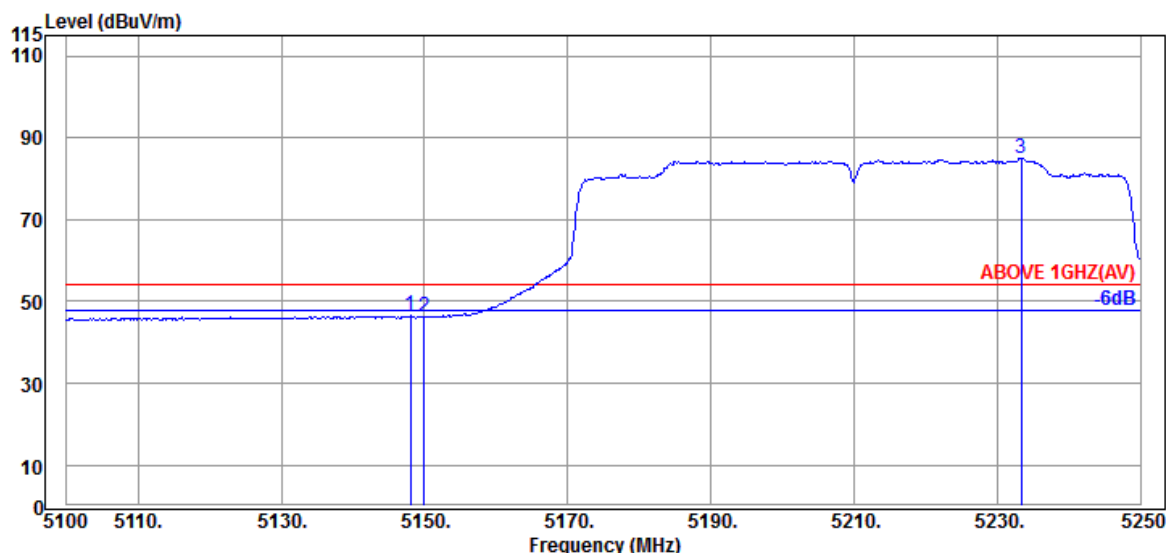

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	34.20	8.92	34.35	37.68	46.45	54.00	7.55	Average
5149.950	34.20	8.92	34.35	37.44	46.21	54.00	7.79	Average
@ 5233.350	34.35	8.99	34.32	76.11	85.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

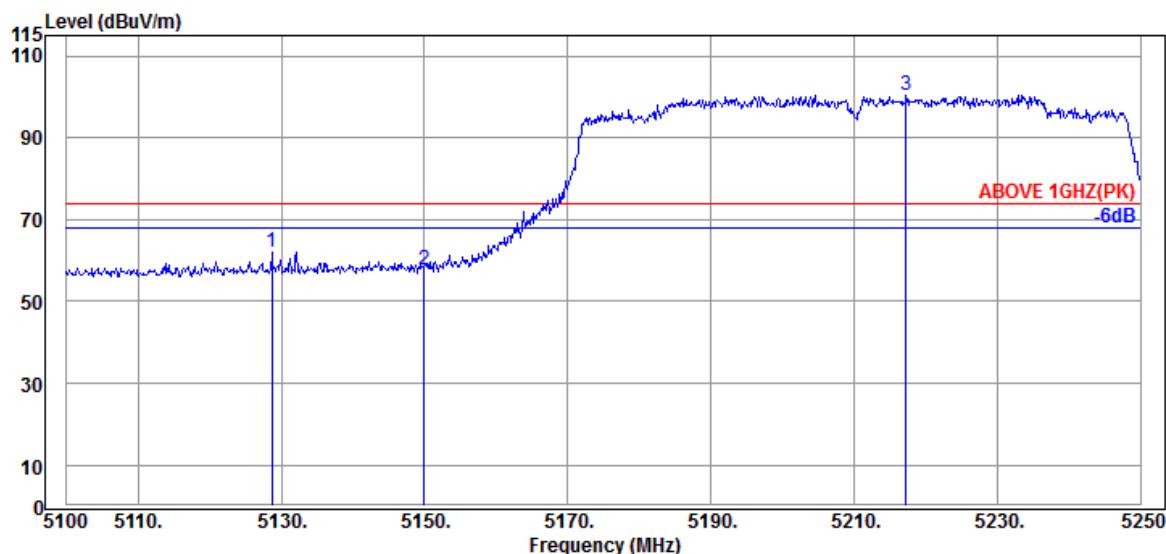

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.650	34.17	8.91	34.36	53.52	62.24	74.00	11.76	Peak
5149.950	34.20	8.92	34.35	48.79	57.56	74.00	16.44	Peak
@ 5217.300	34.30	8.98	34.33	91.30	100.25	---	---	Peak

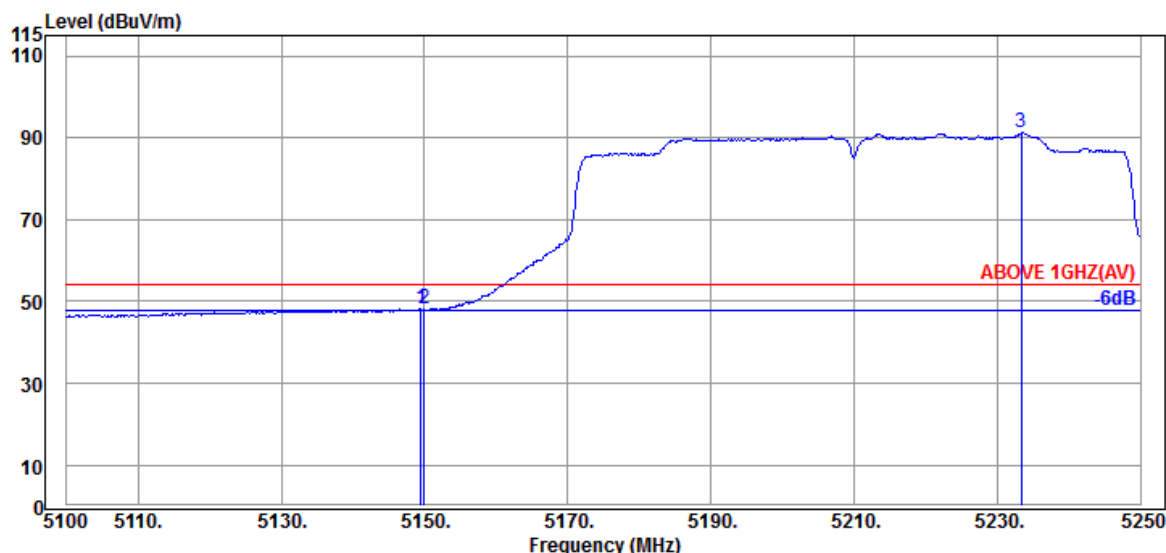

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	34.35	39.40	48.17	54.00	5.83	Average
5149.950	34.20	8.92	34.35	39.40	48.17	54.00	5.83	Average
@ 5233.350	34.35	8.99	34.32	82.21	91.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239


Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

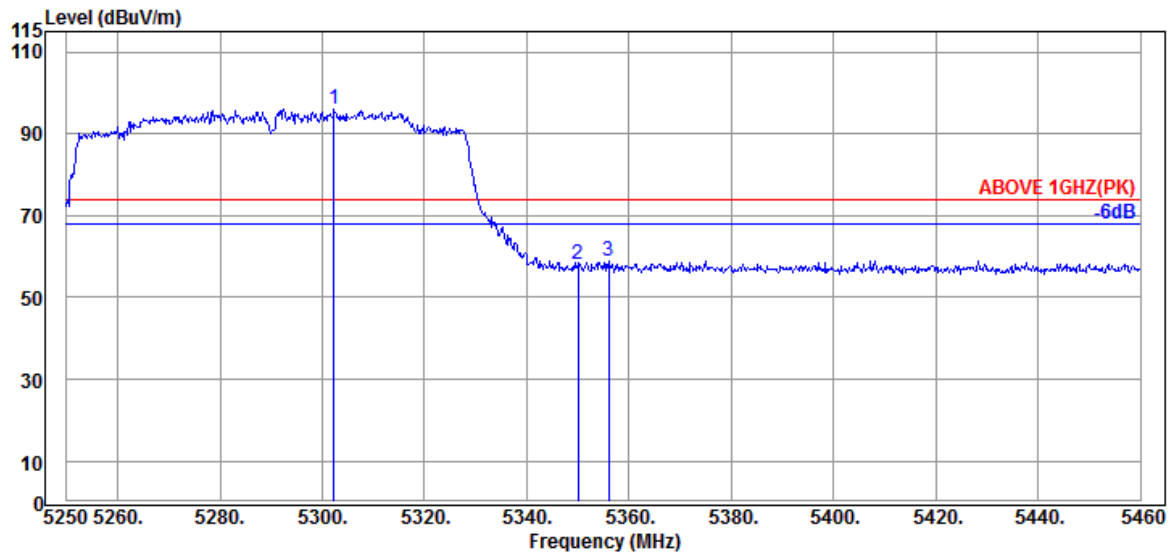

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.290	34.50	9.05	34.29	86.83	96.09	---	---	Peak
5349.960	34.60	9.10	34.27	48.76	58.19	74.00	15.81	Peak
5356.050	34.63	9.10	34.27	49.53	58.99	74.00	15.01	Peak

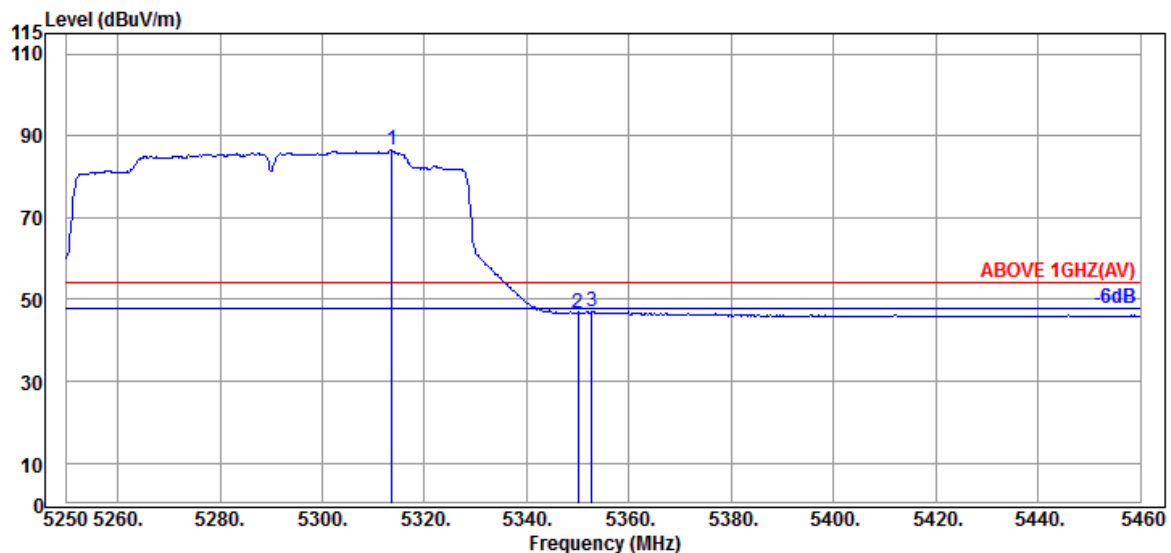

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.630	34.53	9.07	34.29	77.29	86.60	---	---	Average
5349.960	34.60	9.10	34.27	37.22	46.65	54.00	7.35	Average
5352.690	34.60	9.10	34.27	37.51	46.94	54.00	7.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

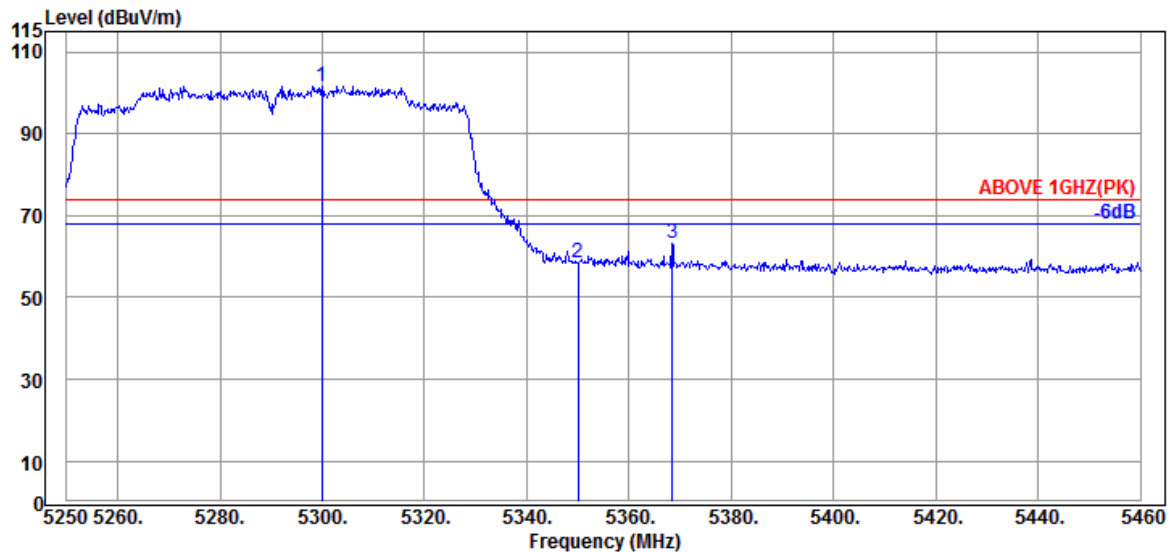

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.980	34.50	9.05	34.29	92.47	101.73	---	---	Peak
5349.960	34.60	9.10	34.27	49.19	58.62	74.00	15.38	Peak
5368.440	34.63	9.11	34.27	53.71	63.18	74.00	10.82	Peak

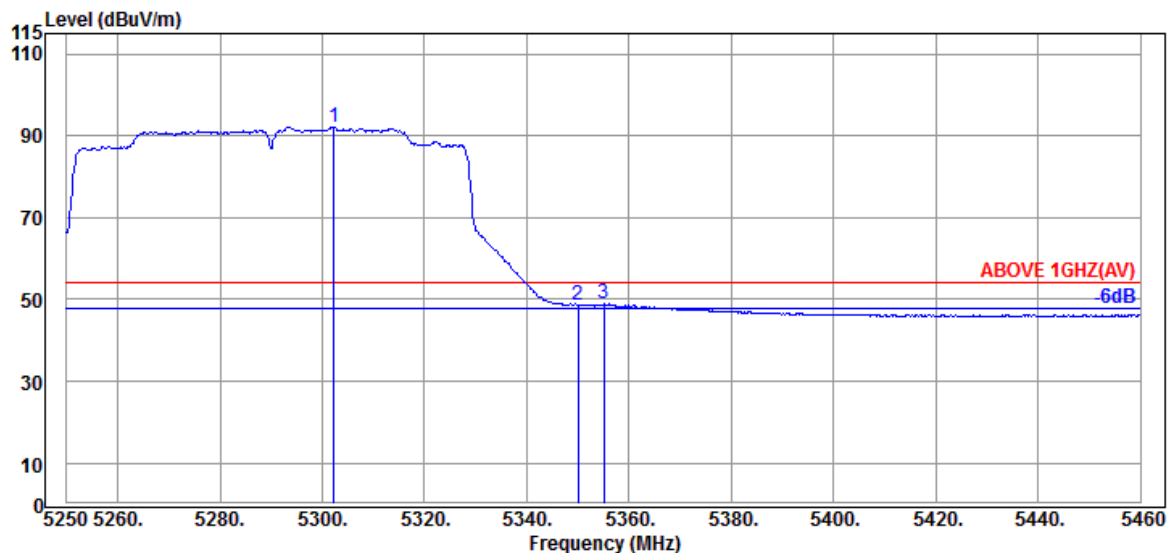

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.290	34.50	9.05	34.29	82.82	92.08	---	---	Average
5349.960	34.60	9.10	34.27	39.22	48.65	54.00	5.35	Average
5355.000	34.63	9.10	34.27	39.41	48.87	54.00	5.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

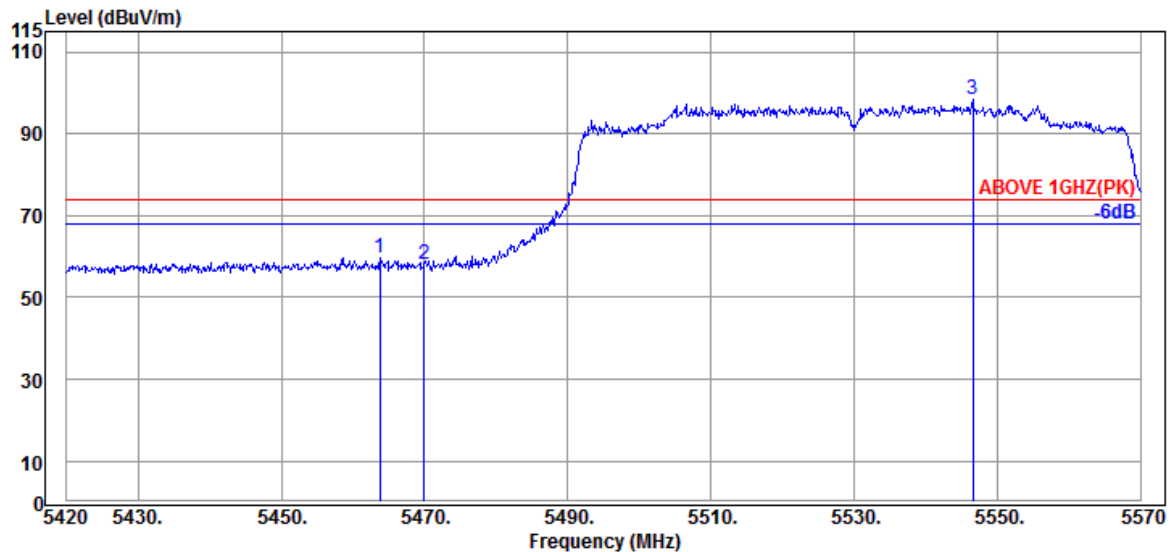

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.47	9.20	34.24	50.24	59.67	74.00	14.33	Peak
5469.950	34.47	9.20	34.24	48.76	58.19	74.00	15.81	Peak
@ 5546.600	34.30	9.26	34.25	89.02	98.33	---	---	Peak

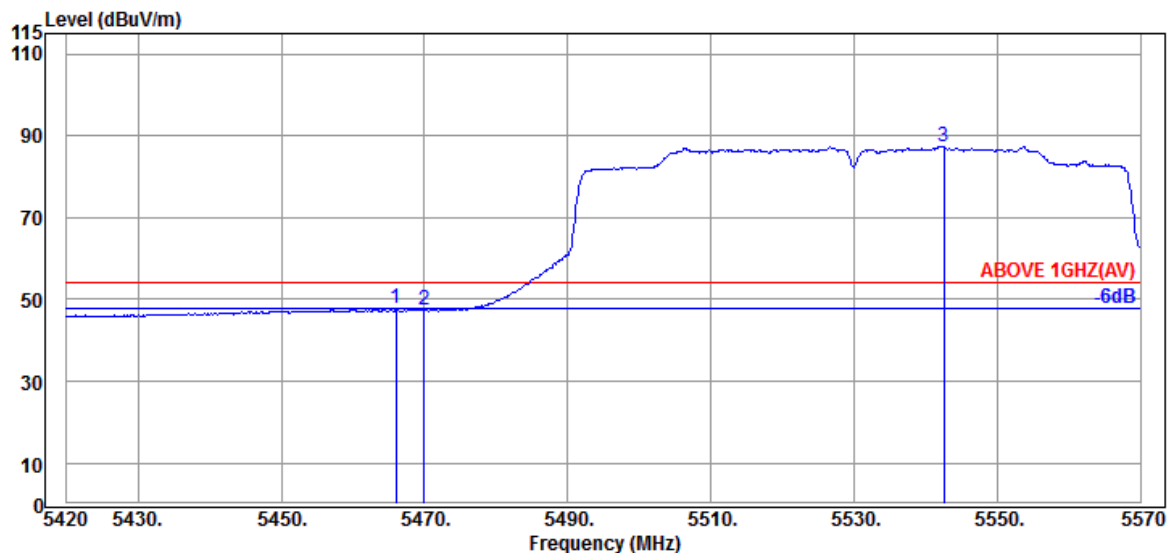

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.050	34.47	9.20	34.24	38.29	47.72	54.00	6.28	Average
5469.950	34.47	9.20	34.24	37.85	47.28	54.00	6.72	Average
@ 5542.550	34.33	9.26	34.25	78.15	87.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

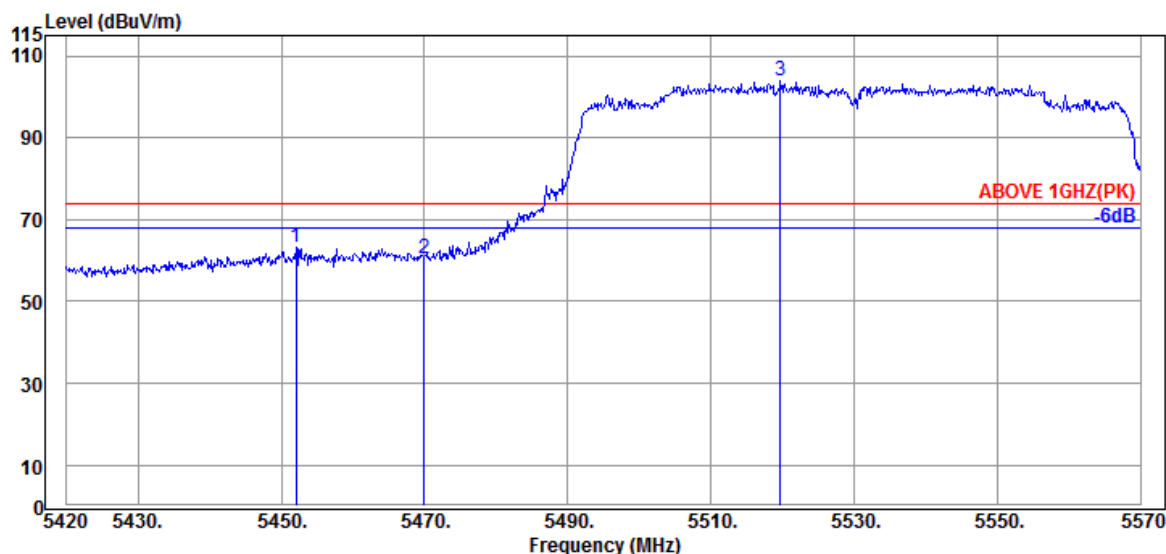

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.100	34.50	9.18	34.24	53.79	63.23	74.00	10.77	Peak
5469.950	34.47	9.20	34.24	51.12	60.55	74.00	13.45	Peak
@ 5519.750	34.37	9.24	34.24	94.63	104.00	---	---	Peak

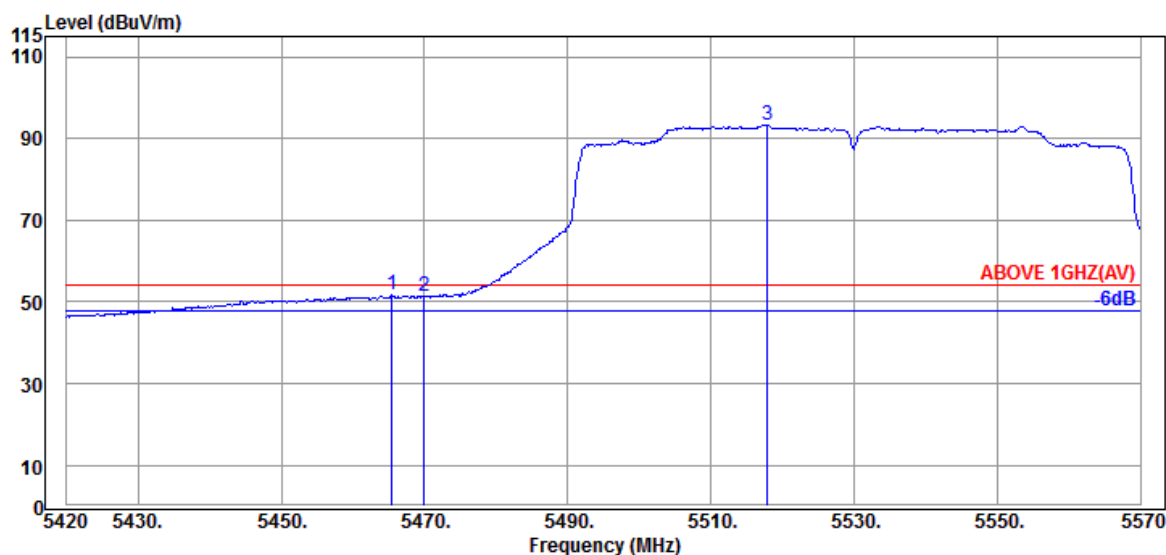

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.450	34.47	9.20	34.24	42.42	51.85	54.00	2.15	Average
5469.950	34.47	9.20	34.24	41.99	51.42	54.00	2.58	Average
@ 5517.950	34.37	9.24	34.24	83.96	93.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

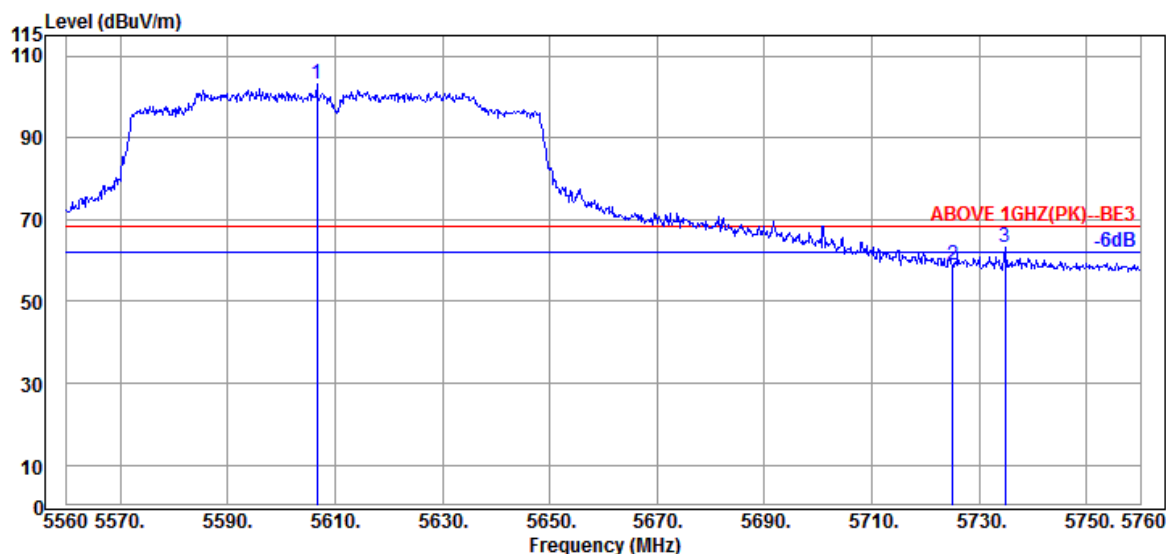

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.600	34.40	9.31	34.28	93.85	103.28	---	---	Peak
5725.000	34.67	9.42	34.32	49.02	58.79	68.20	9.41	Peak
5734.800	34.67	9.43	34.33	53.27	63.04	68.20	5.16	Peak

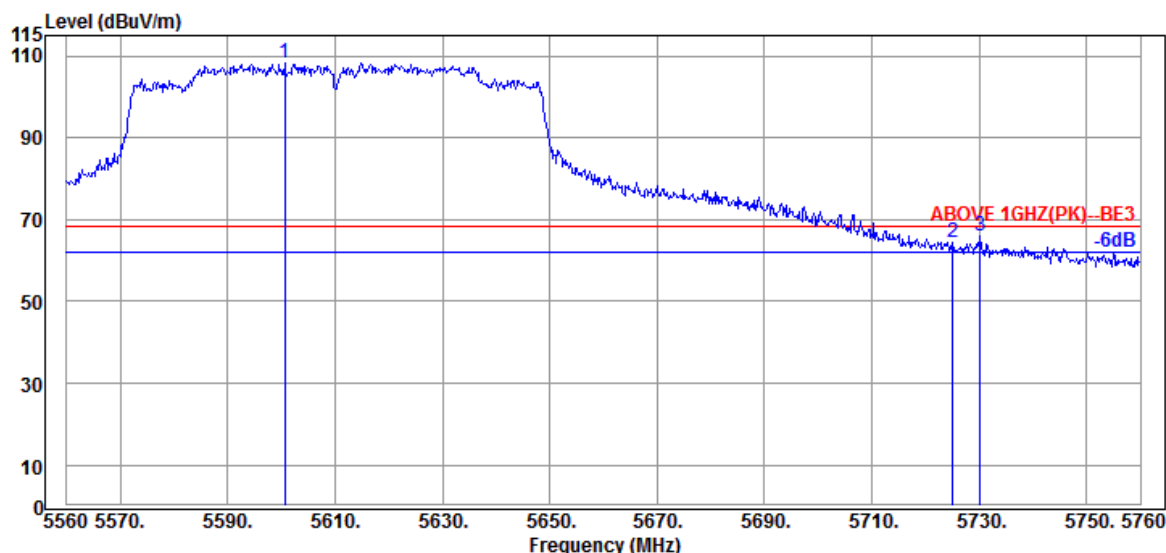

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5600.600	34.40	9.31	34.27	98.77	108.21	---	---	Peak
5725.000	34.67	9.42	34.32	54.80	64.57	68.20	3.63	Peak
5730.200	34.67	9.42	34.32	56.35	66.12	68.20	2.08	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

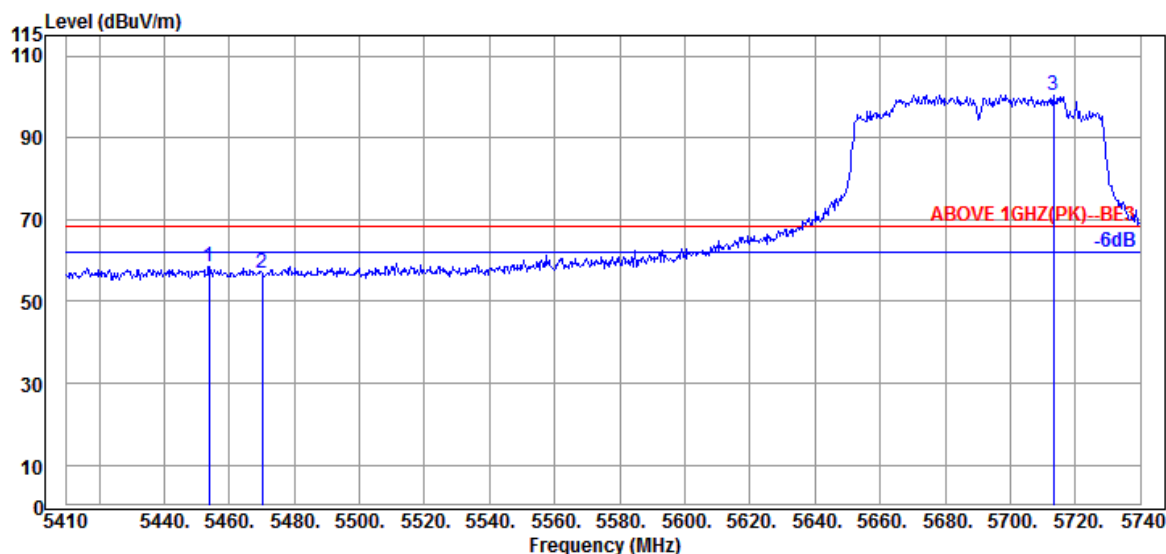

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.890	34.50	9.18	34.24	49.15	58.59	68.20	9.61	Peak
5470.060	34.47	9.20	34.24	47.61	57.04	68.20	11.16	Peak
@ 5713.270	34.53	9.40	34.32	90.90	100.51	---	---	Peak

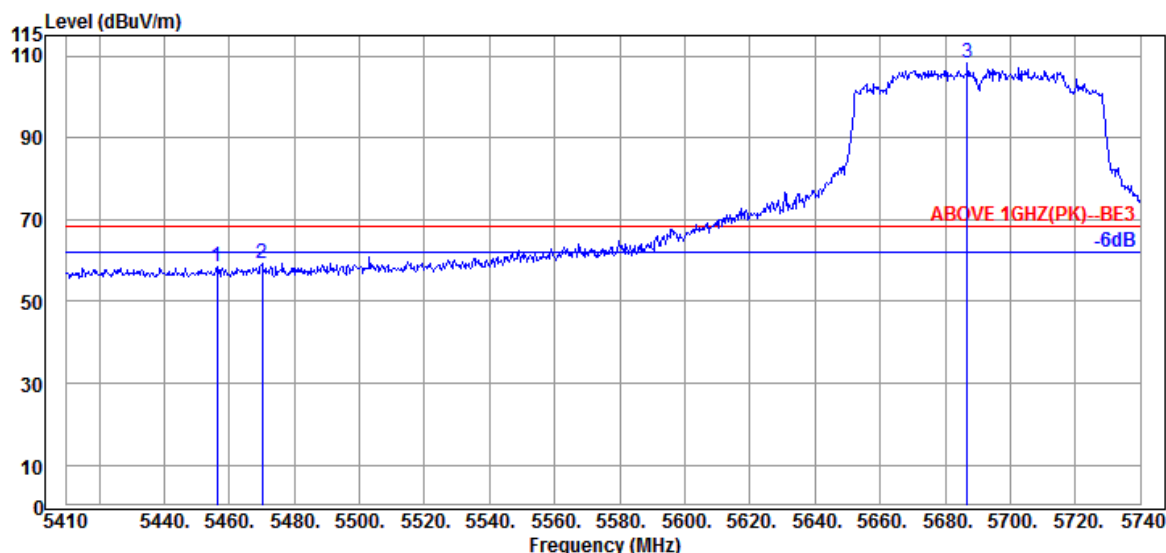

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.50	9.18	34.24	48.91	58.35	68.20	9.85	Peak
5470.060	34.47	9.20	34.24	49.99	59.42	68.20	8.78	Peak
@ 5686.870	34.40	9.39	34.31	98.65	108.13	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

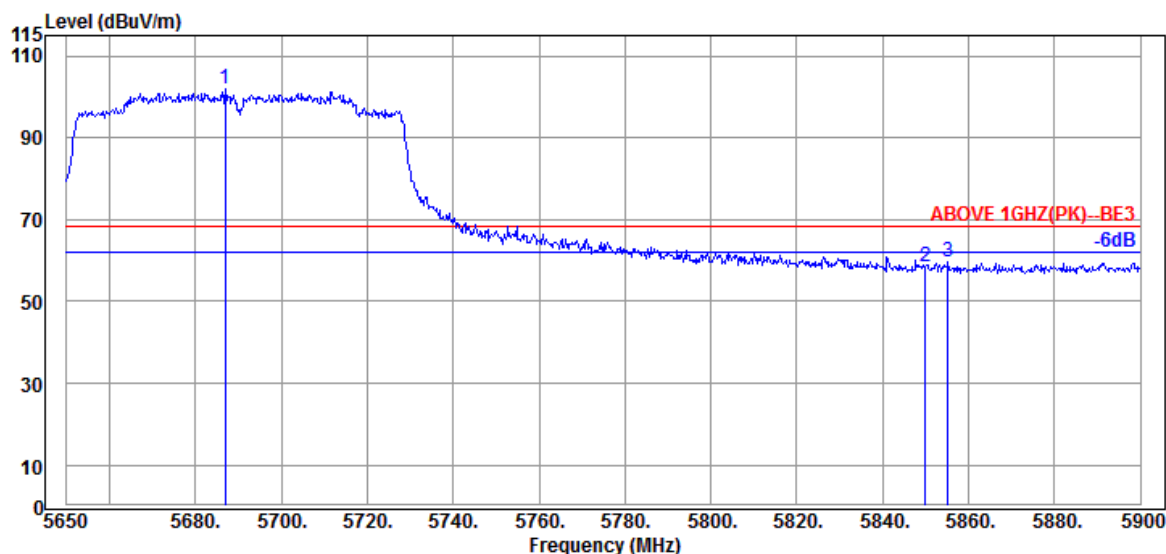

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5687.000	34.40	9.39	34.31	92.52	102.00	---	---	Peak
5850.000	35.10	9.52	34.38	48.33	58.57	68.20	9.63	Peak
5855.250	35.10	9.53	34.38	49.58	59.83	68.20	8.37	Peak

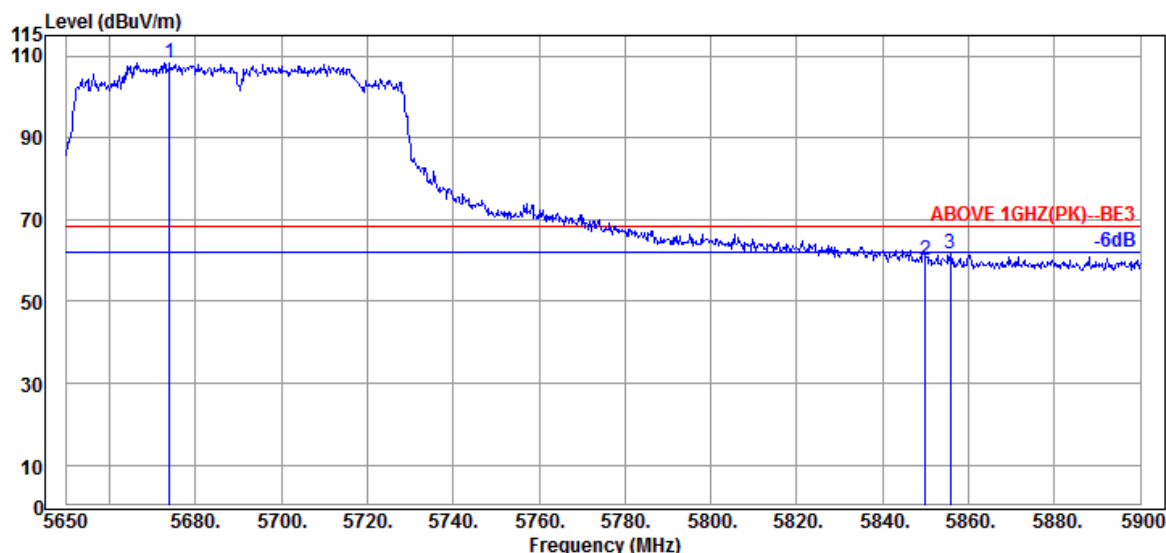

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5674.000	34.40	9.37	34.30	98.94	108.41	---	---	Peak
5850.000	35.10	9.52	34.38	49.77	60.01	68.20	8.19	Peak
5855.750	35.10	9.53	34.38	51.27	61.52	68.20	6.68	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

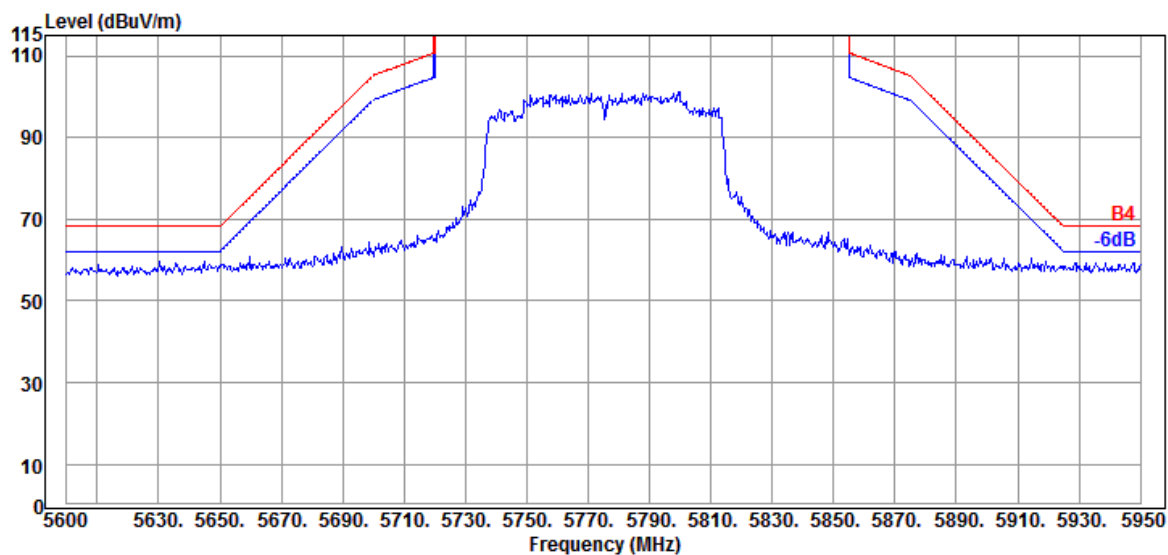

Antenna at Vertical Polarization

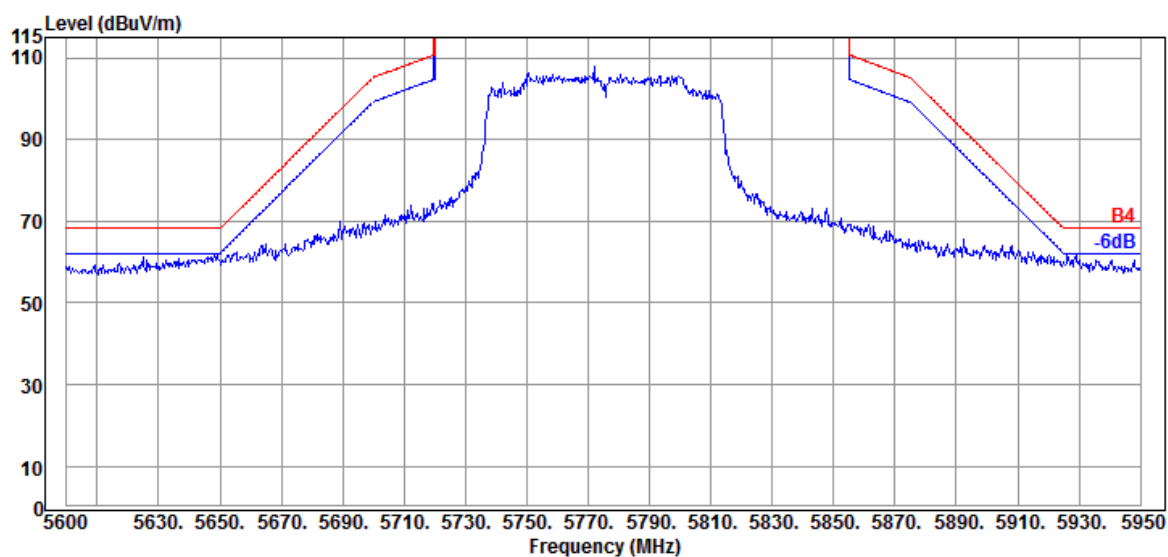

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

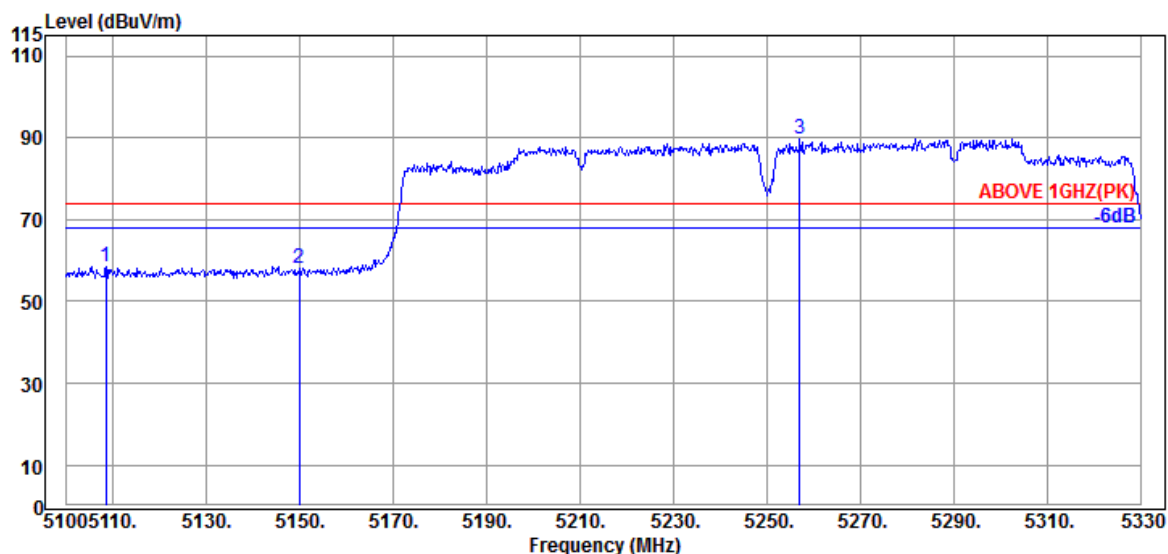

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.510	34.10	8.89	34.36	49.98	58.61	74.00	15.39	Peak
5149.910	34.20	8.92	34.35	49.25	58.02	74.00	15.98	Peak
@ 5257.090	34.40	9.01	34.31	80.71	89.81	---	---	Peak

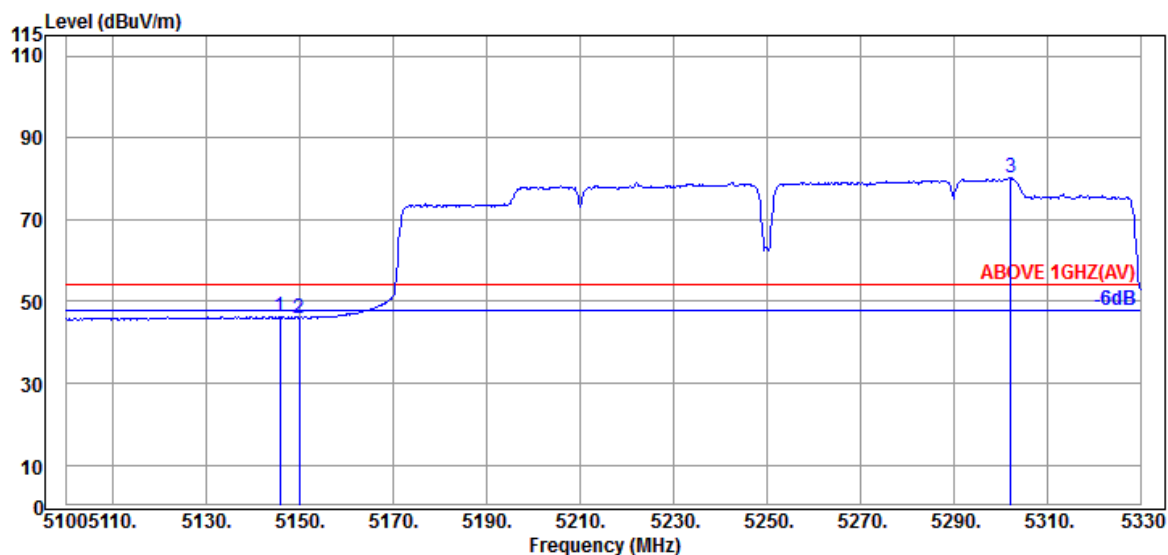

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.770	34.20	8.92	34.35	37.49	46.26	54.00	7.74	Average
5149.910	34.20	8.92	34.35	37.25	46.02	54.00	7.98	Average
@ 5302.170	34.50	9.05	34.29	71.10	80.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

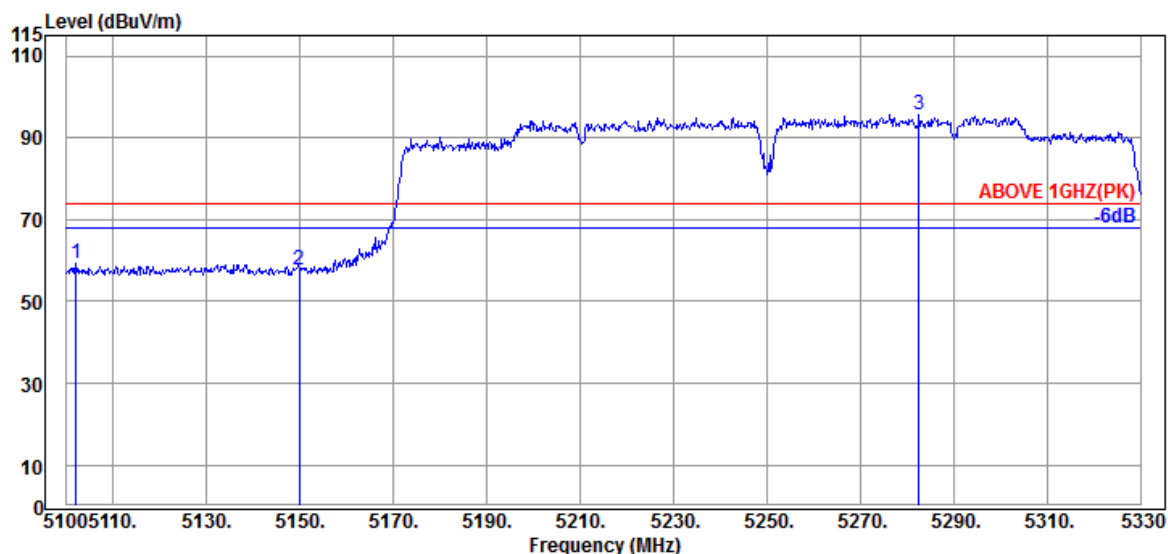

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.070	34.10	8.88	34.36	50.66	59.28	74.00	14.72	Peak
5149.910	34.20	8.92	34.35	49.00	57.77	74.00	16.23	Peak
@ 5282.620	34.47	9.04	34.30	86.53	95.74	---	---	Peak

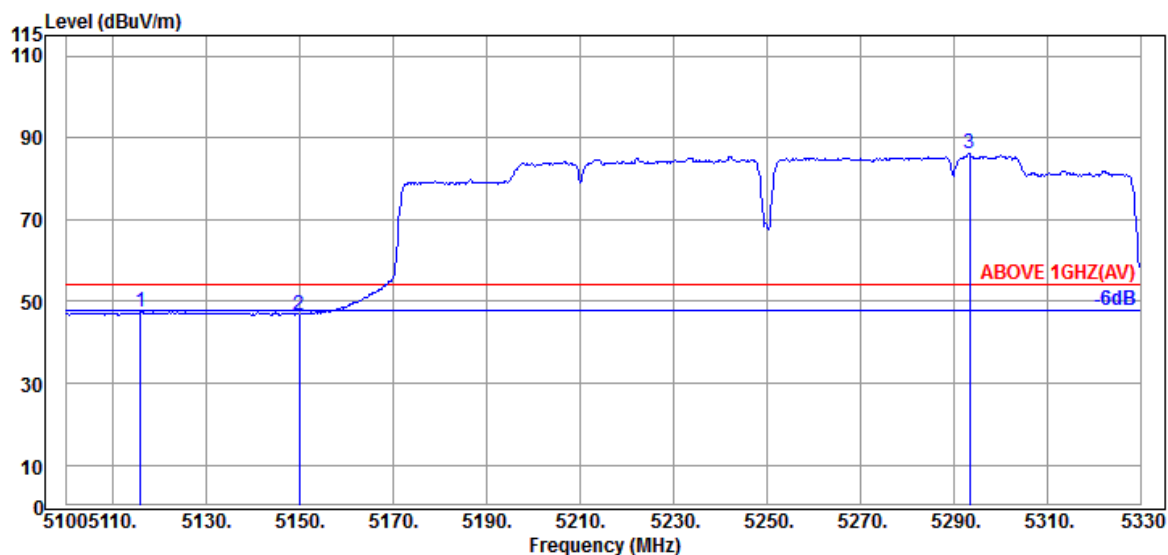

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.870	34.13	8.89	34.36	38.65	47.31	54.00	6.69	Average
5149.910	34.20	8.92	34.35	38.03	46.80	54.00	7.20	Average
@ 5293.430	34.50	9.05	34.30	76.95	86.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

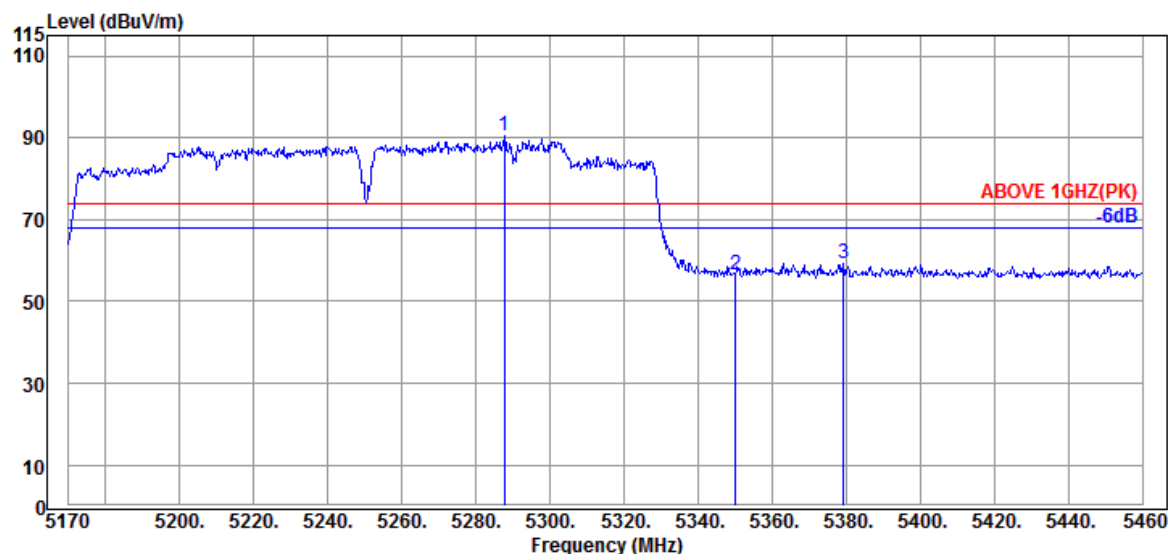

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5287.740	34.47	9.04	34.30	81.20	90.41	---	---	Peak
	5350.090	34.60	9.10	34.27	47.01	56.44	74.00	17.56	Peak
	5379.380	34.67	9.13	34.27	49.92	59.45	74.00	14.55	Peak

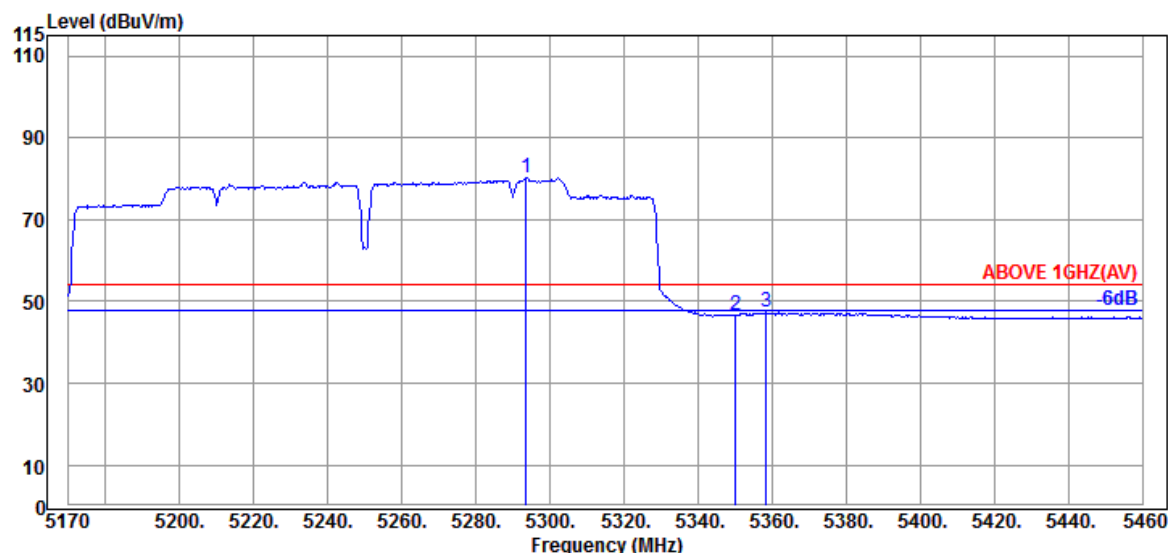

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.540	34.50	9.05	34.30	70.90	80.15	---	---	Average
	5350.090	34.60	9.10	34.27	37.30	46.73	54.00	7.27	Average
	5358.500	34.63	9.10	34.27	37.79	47.25	54.00	6.75	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1/2A
		Frequency	TX 5250MHz

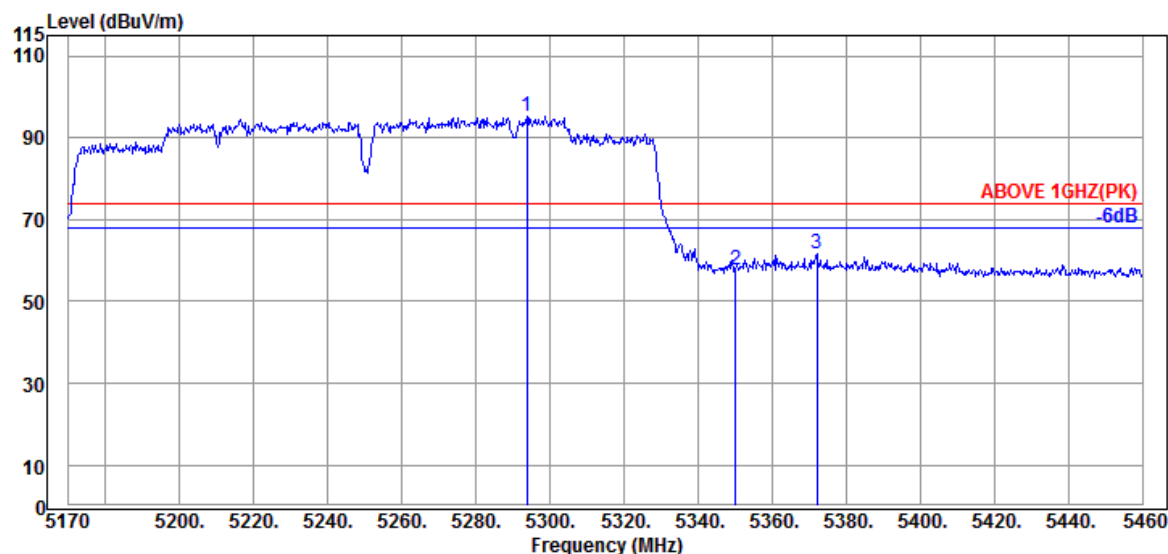

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.830	34.50	9.05	34.30	85.97	95.22	---	---	Peak
5350.090	34.60	9.10	34.27	48.20	57.63	74.00	16.37	Peak
5372.130	34.67	9.11	34.27	52.27	61.78	74.00	12.22	Peak

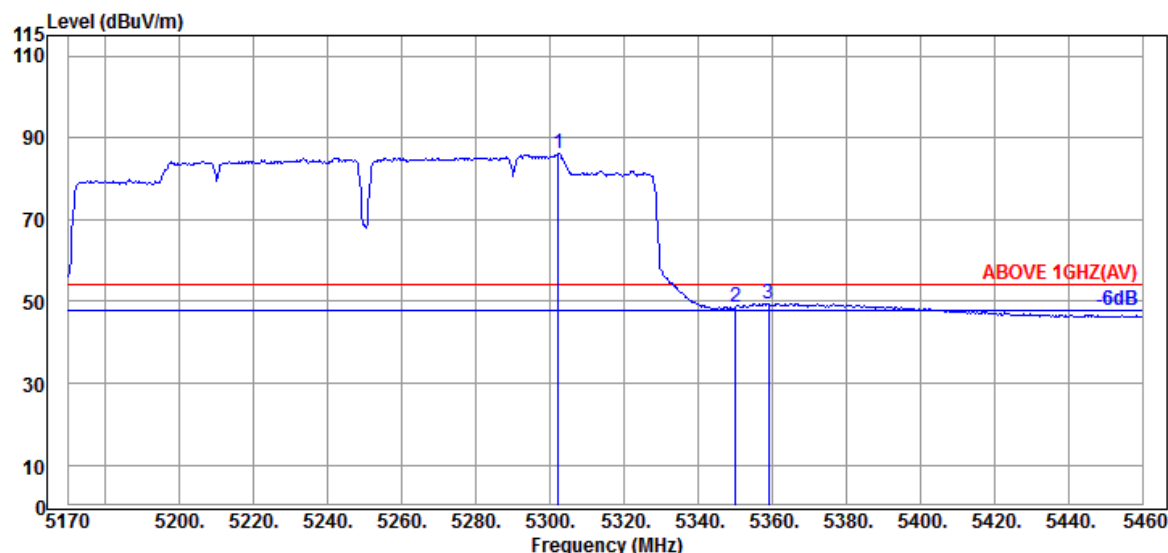

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	34.50	9.05	34.29	76.93	86.19	---	---	Average
5350.090	34.60	9.10	34.27	39.07	48.50	54.00	5.50	Average
5359.080	34.63	9.10	34.27	40.02	49.48	54.00	4.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

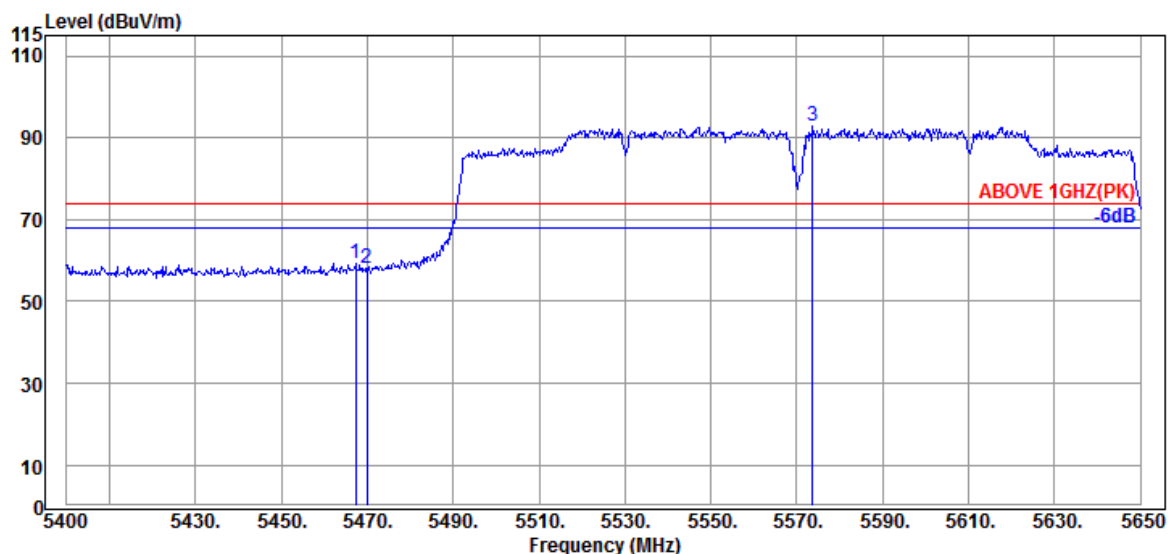

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.47	9.20	34.24	49.88	59.31	74.00	14.69	Peak
5470.000	34.47	9.20	34.24	48.66	58.09	74.00	15.91	Peak
@ 5573.750	34.33	9.29	34.26	83.61	92.97	---	---	Peak

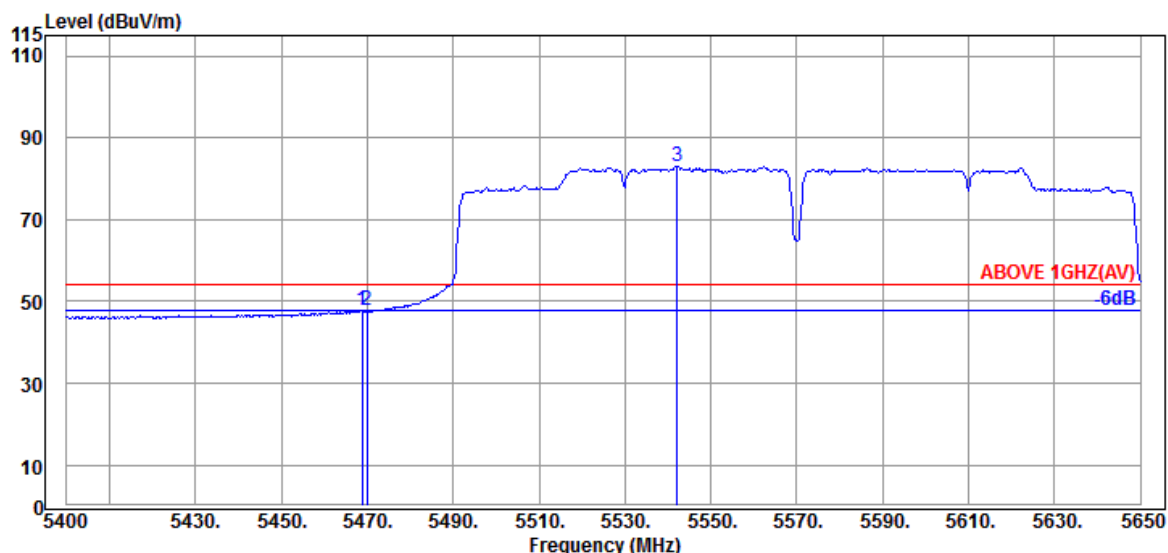

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	9.20	34.24	38.32	47.75	54.00	6.25	Average
5470.000	34.47	9.20	34.24	38.25	47.68	54.00	6.32	Average
@ 5542.250	34.33	9.26	34.25	73.69	83.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

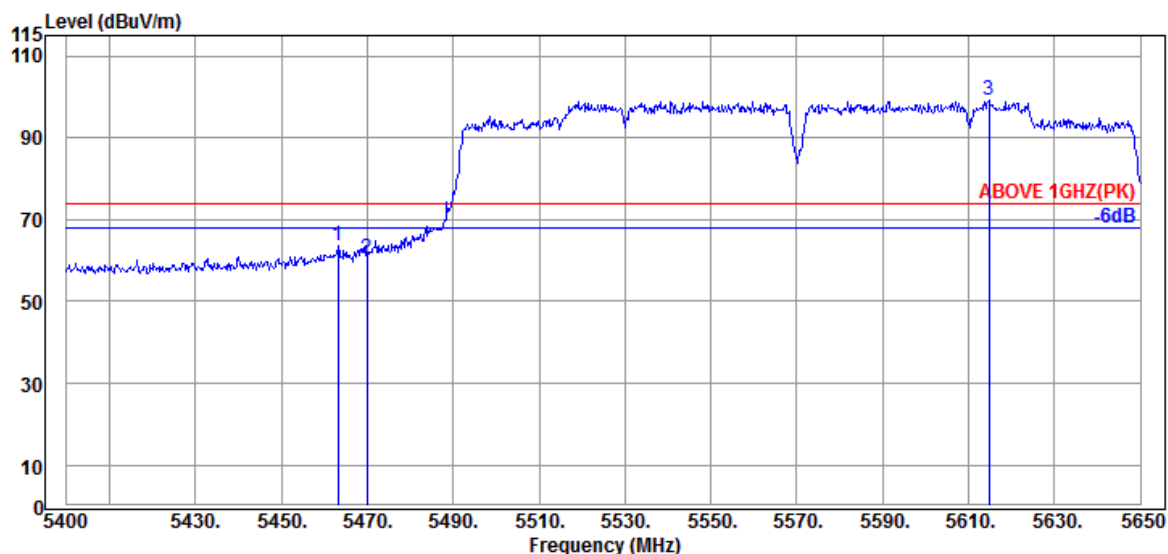

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.250	34.50	9.20	34.24	54.19	63.65	74.00	10.35	Peak
5470.000	34.47	9.20	34.24	51.05	60.48	74.00	13.52	Peak
@ 5614.750	34.40	9.31	34.28	89.61	99.04	---	---	Peak

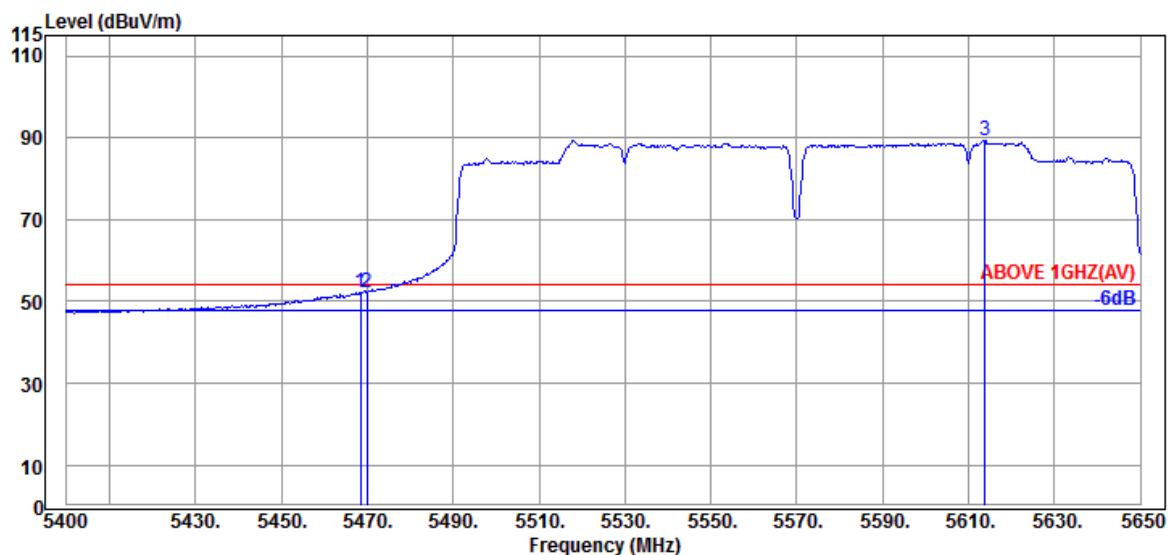

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.47	9.20	34.24	42.81	52.24	54.00	1.76	Average
5470.000	34.47	9.20	34.24	42.79	52.22	54.00	1.78	Average
@ 5613.750	34.40	9.31	34.28	79.88	89.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

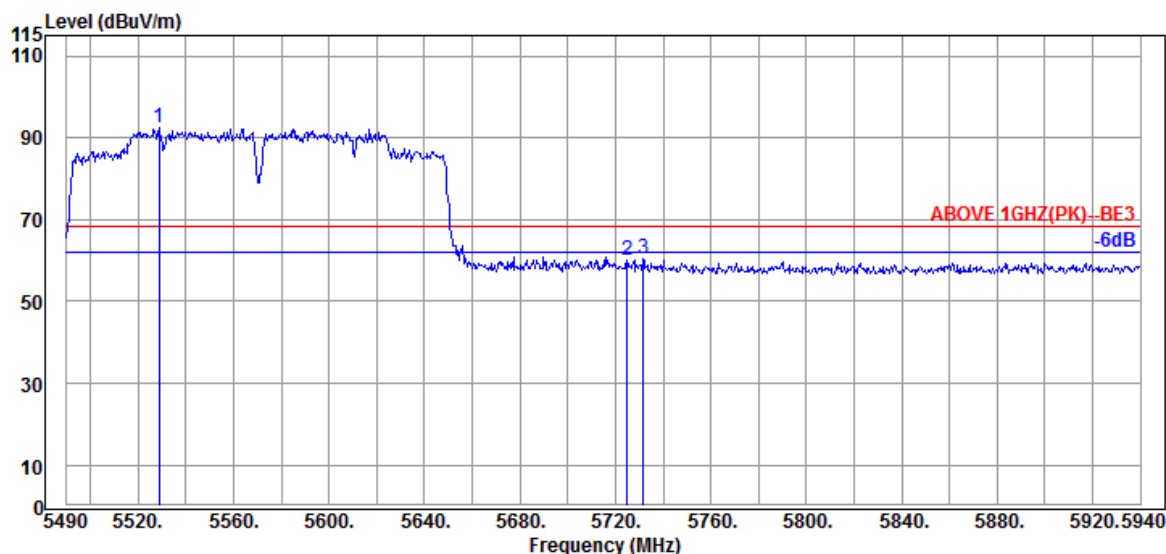

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5528.700	34.33	9.24	34.25	83.05	92.37	---	---	Peak
	5724.900	34.67	9.42	34.32	50.46	60.23	68.20	7.97	Peak
	5731.650	34.67	9.42	34.33	50.51	60.27	68.20	7.93	Peak

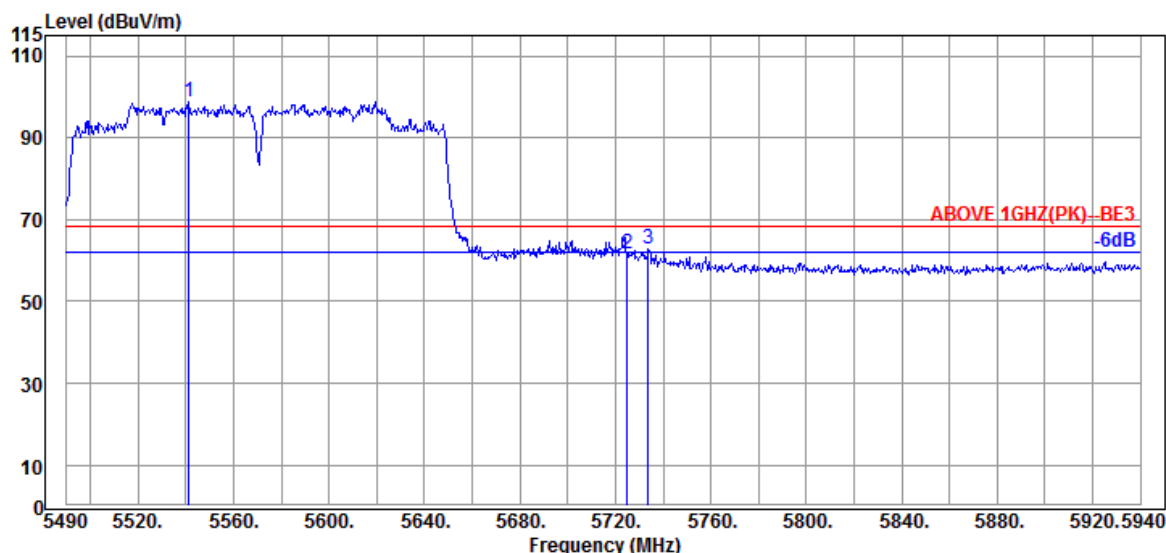

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5541.300	34.33	9.26	34.25	89.32	98.66	---	---	Peak
	5724.900	34.67	9.42	34.32	52.07	61.84	68.20	6.36	Peak
	5733.900	34.67	9.42	34.33	52.91	62.67	68.20	5.53	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

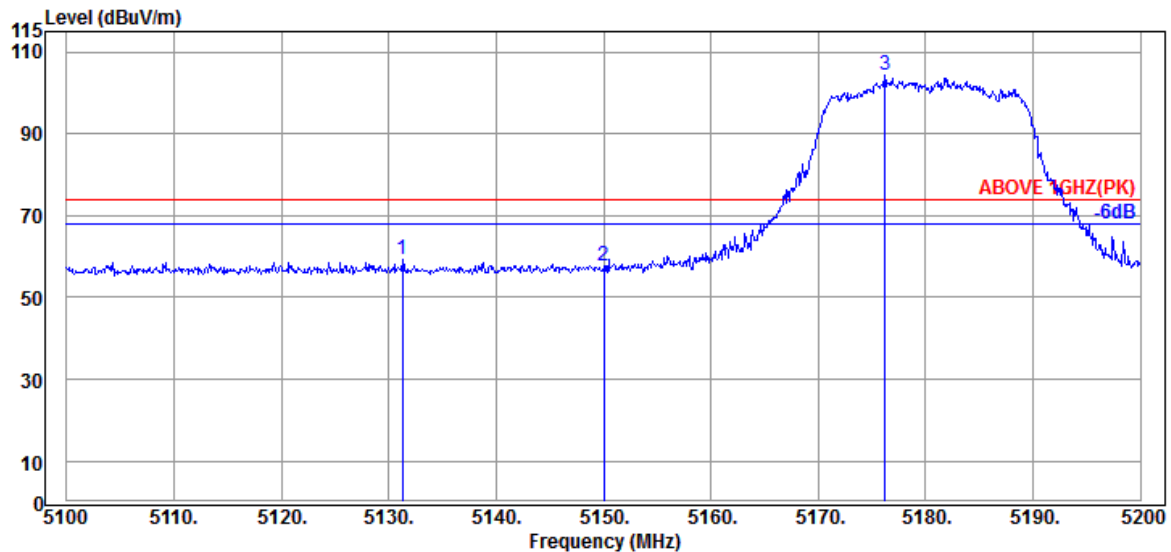

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.300	34.17	8.91	34.36	50.56	59.28	74.00	14.72	Peak
5150.000	34.20	8.92	34.35	48.90	57.67	74.00	16.33	Peak
@ 5176.200	34.20	8.95	34.34	95.36	104.17	---	---	Peak

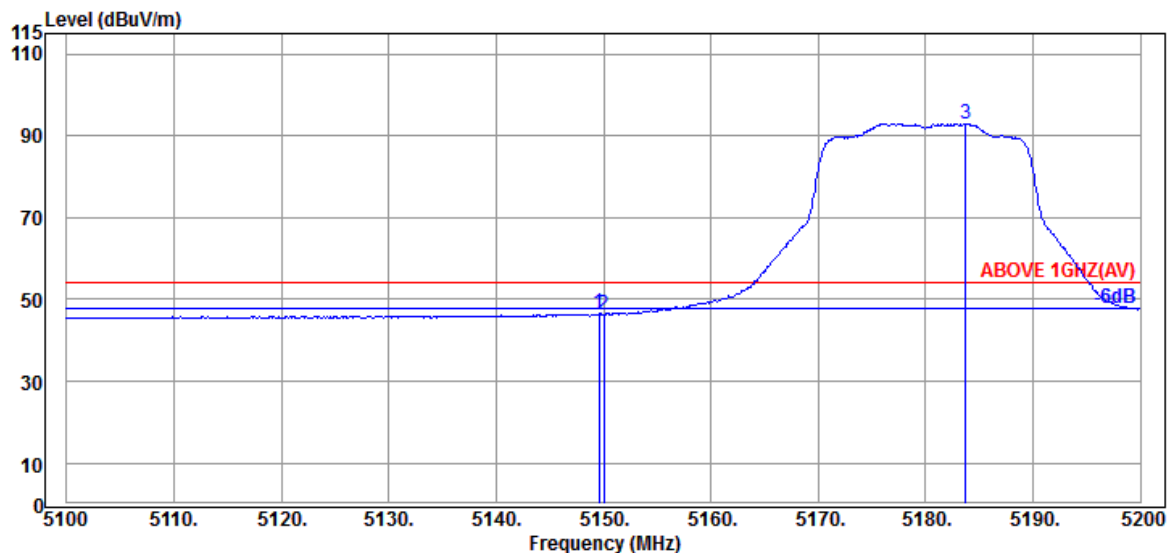

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.92	34.35	37.81	46.58	54.00	7.42	Average
5150.000	34.20	8.92	34.35	37.56	46.33	54.00	7.67	Average
@ 5183.700	34.20	8.95	34.34	84.16	92.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239


Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

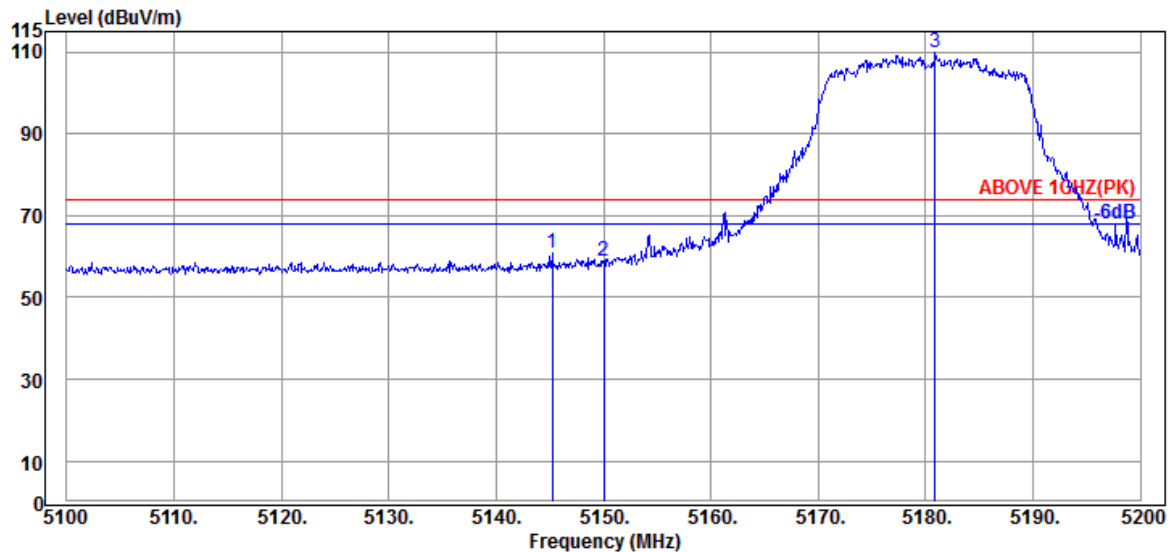

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5145.200	34.20	8.92	34.35	51.90	60.67	74.00	13.33	Peak
5150.000	34.20	8.92	34.35	50.23	59.00	74.00	15.00	Peak
@ 5180.900	34.20	8.95	34.34	100.86	109.67	---	---	Peak

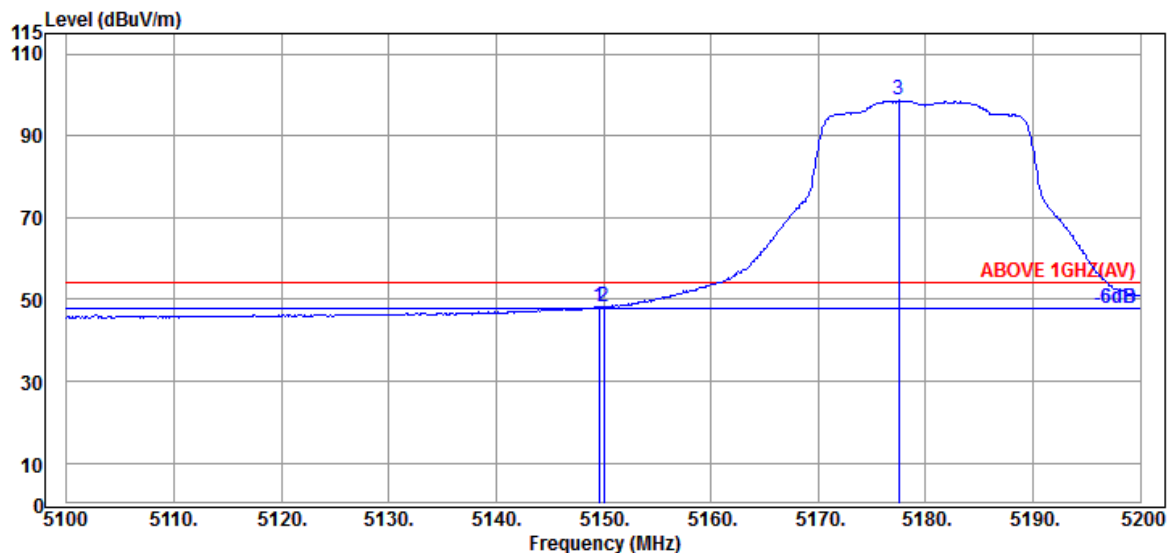

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.600	34.20	8.92	34.35	39.40	48.17	54.00	5.83	Average
5150.000	34.20	8.92	34.35	39.36	48.13	54.00	5.87	Average
@ 5177.500	34.20	8.95	34.34	89.81	98.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

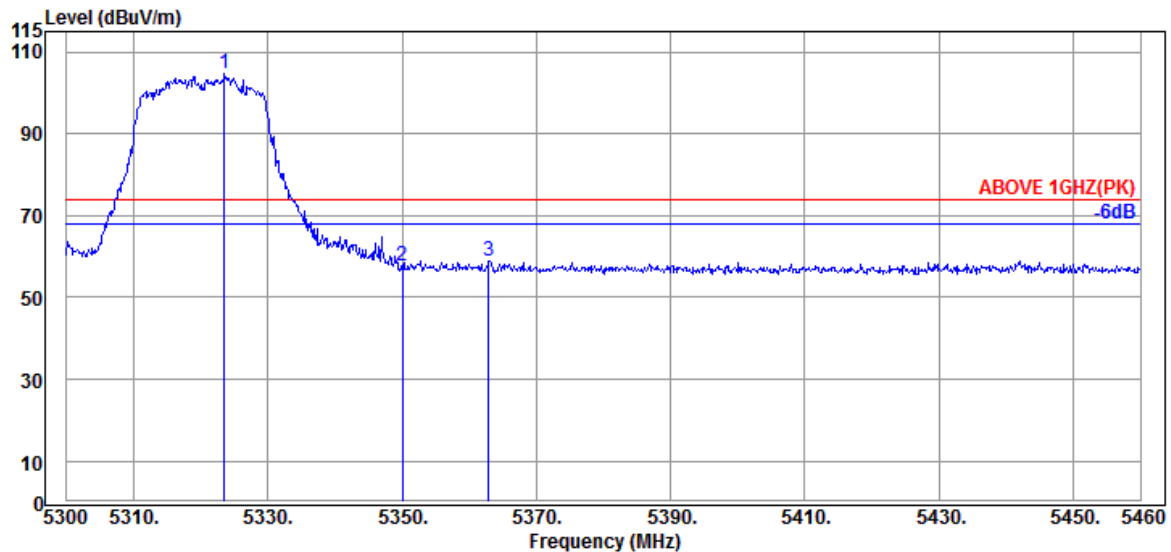

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.520	34.57	9.07	34.28	95.38	104.74	---	---	Peak
	5350.080	34.60	9.10	34.27	48.17	57.60	74.00	16.40	Peak
	5362.880	34.63	9.11	34.27	49.58	59.05	74.00	14.95	Peak

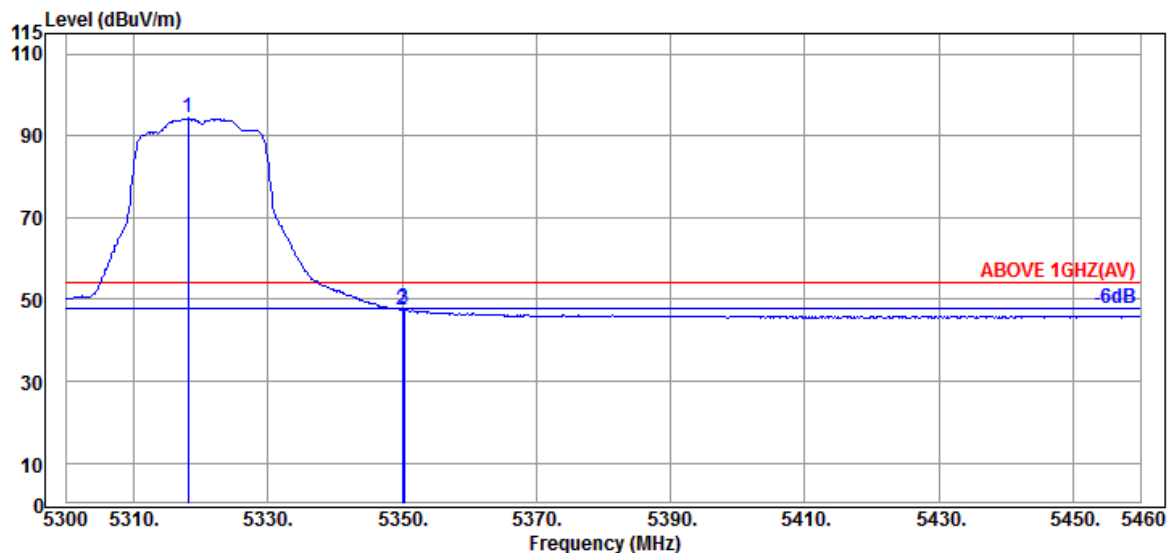

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.080	34.53	9.07	34.29	85.04	94.35	---	---	Average
	5350.080	34.60	9.10	34.27	38.14	47.57	54.00	6.43	Average
	5350.240	34.60	9.10	34.27	38.32	47.75	54.00	6.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

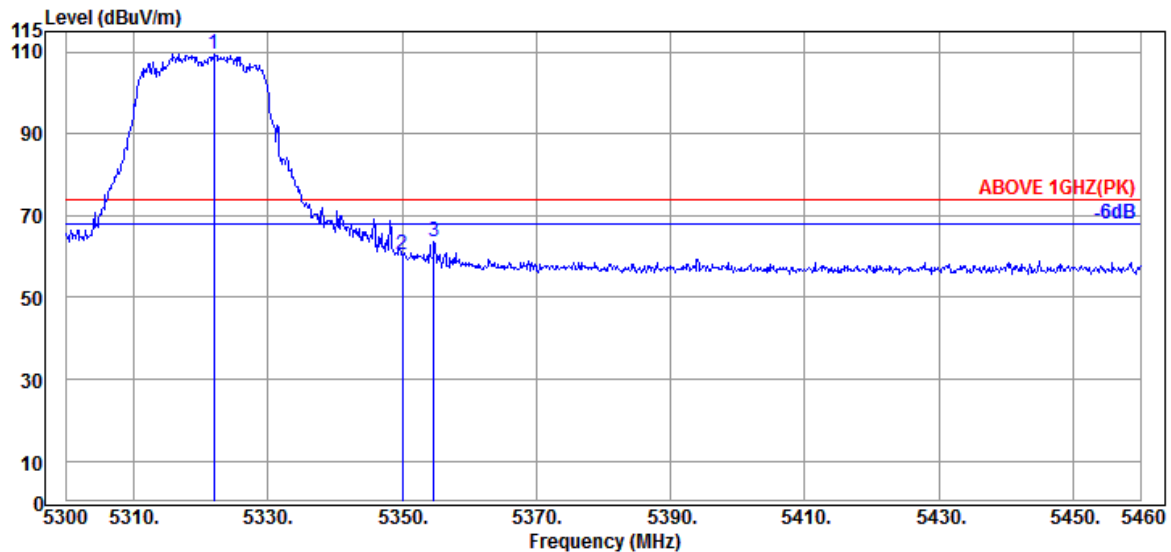

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.920	34.53	9.07	34.29	100.21	109.52	---	---	Peak
5350.080	34.60	9.10	34.27	51.22	60.65	74.00	13.35	Peak
5354.720	34.63	9.10	34.27	54.00	63.46	74.00	10.54	Peak

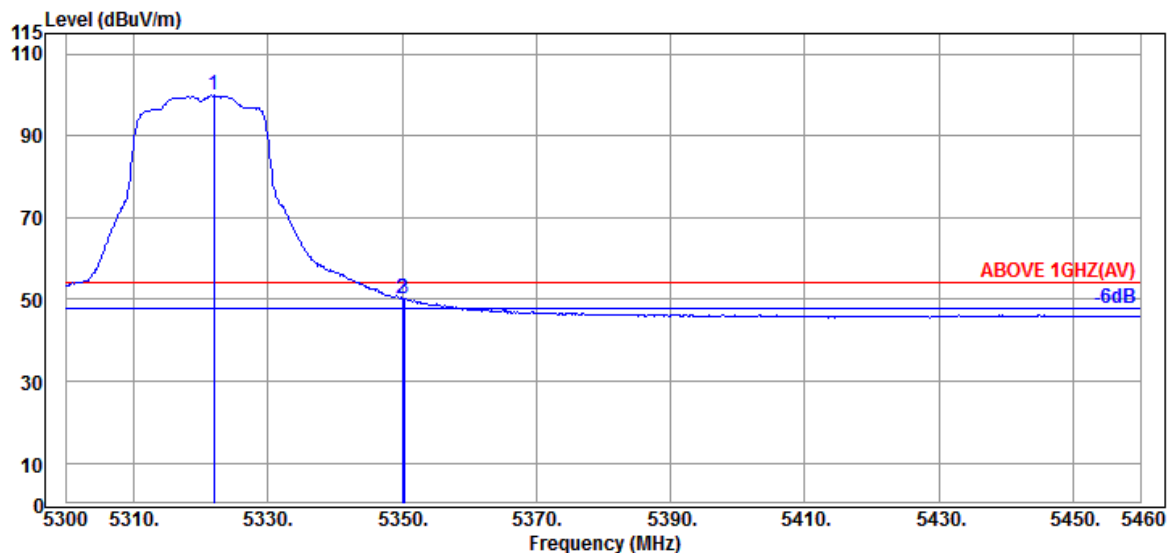

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.920	34.53	9.07	34.29	90.54	99.85	---	---	Average
5350.080	34.60	9.10	34.27	40.66	50.09	54.00	3.91	Average
5350.240	34.60	9.10	34.27	40.70	50.13	54.00	3.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

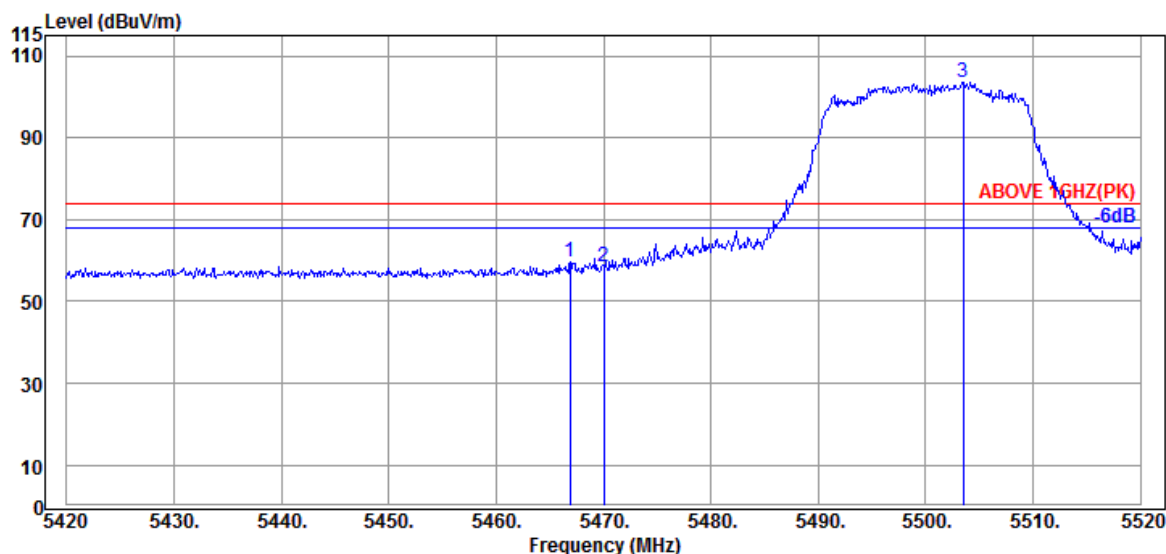

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.900	34.47	9.20	34.24	50.09	59.52	74.00	14.48	Peak
5470.000	34.47	9.20	34.24	49.08	58.51	74.00	15.49	Peak
@ 5503.500	34.40	9.23	34.24	94.25	103.64	---	---	Peak

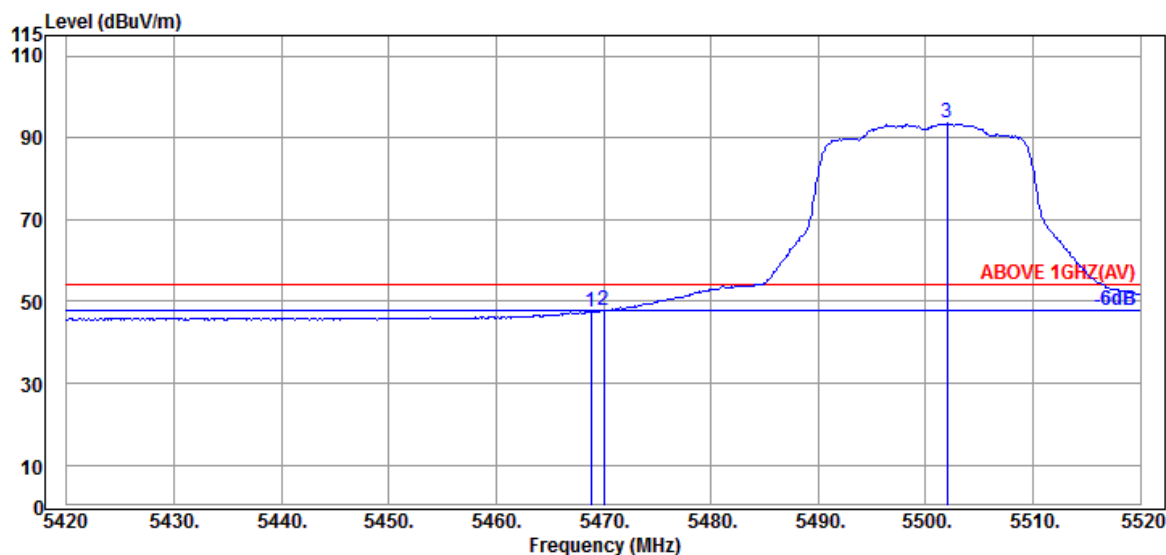

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.47	9.20	34.24	38.13	47.56	54.00	6.44	Average
5470.000	34.47	9.20	34.24	38.34	47.77	54.00	6.23	Average
@ 5502.000	34.40	9.23	34.24	84.23	93.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

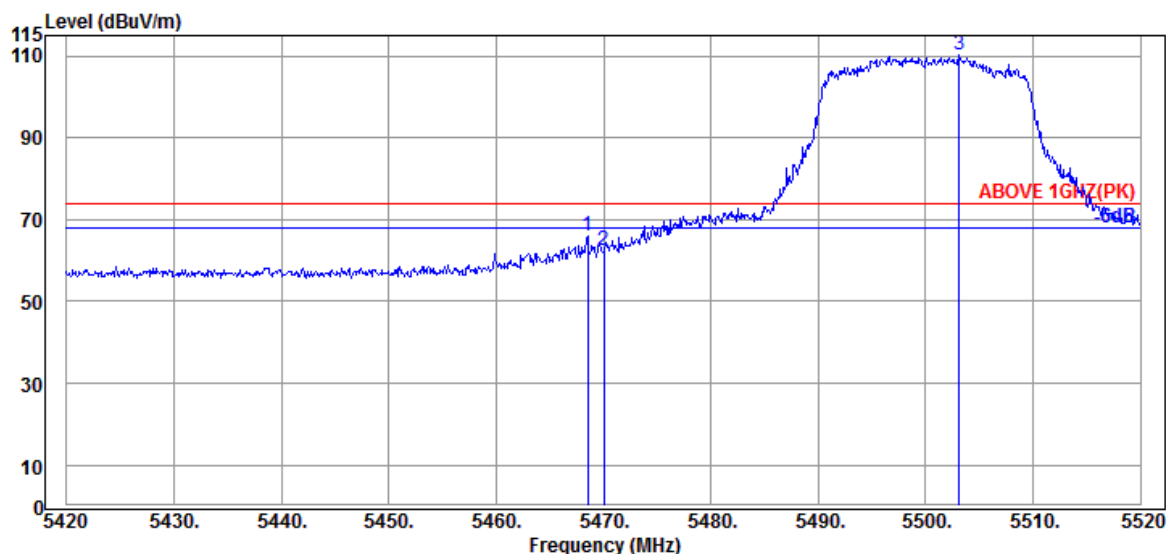

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.47	9.20	34.24	56.42	65.85	74.00	8.15	Peak
5470.000	34.47	9.20	34.24	53.10	62.53	74.00	11.47	Peak
@ 5503.100	34.40	9.23	34.24	100.79	110.18	---	---	Peak

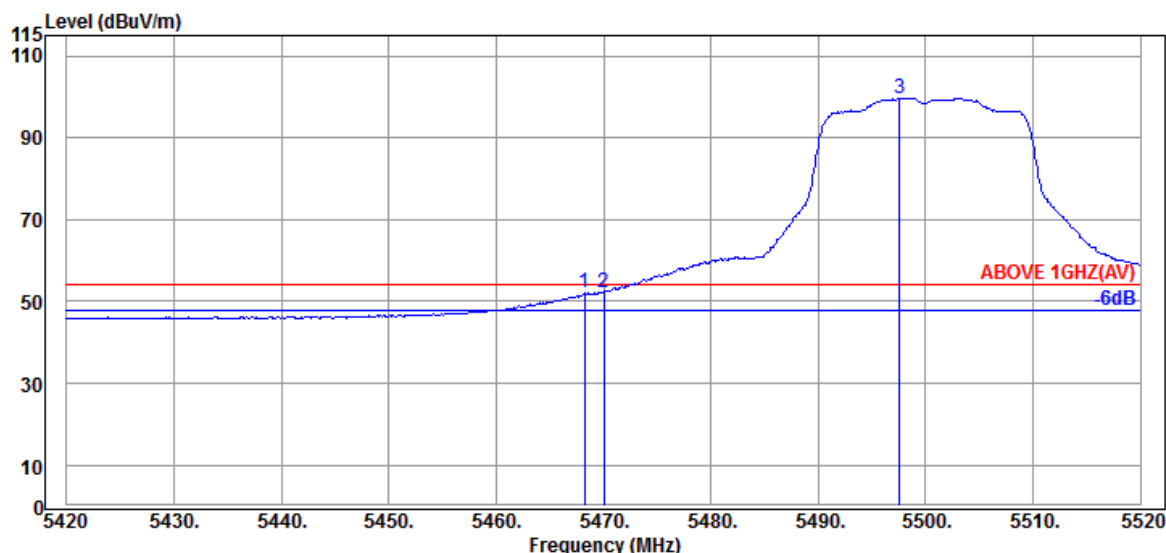

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.47	9.20	34.24	42.61	52.04	54.00	1.96	Average
5470.000	34.47	9.20	34.24	42.82	52.25	54.00	1.75	Average
@ 5497.600	34.40	9.23	34.23	90.27	99.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

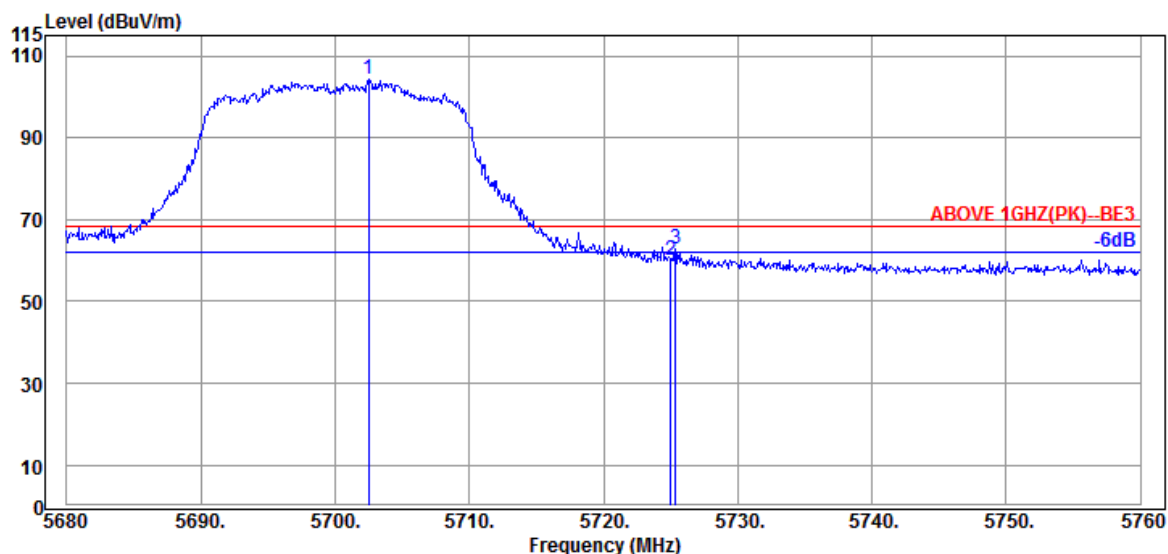

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.480	34.40	9.40	34.31	94.72	104.21	---	---	Peak
5725.040	34.67	9.42	34.32	50.39	60.16	68.20	8.04	Peak
5725.360	34.67	9.42	34.32	52.88	62.65	68.20	5.55	Peak

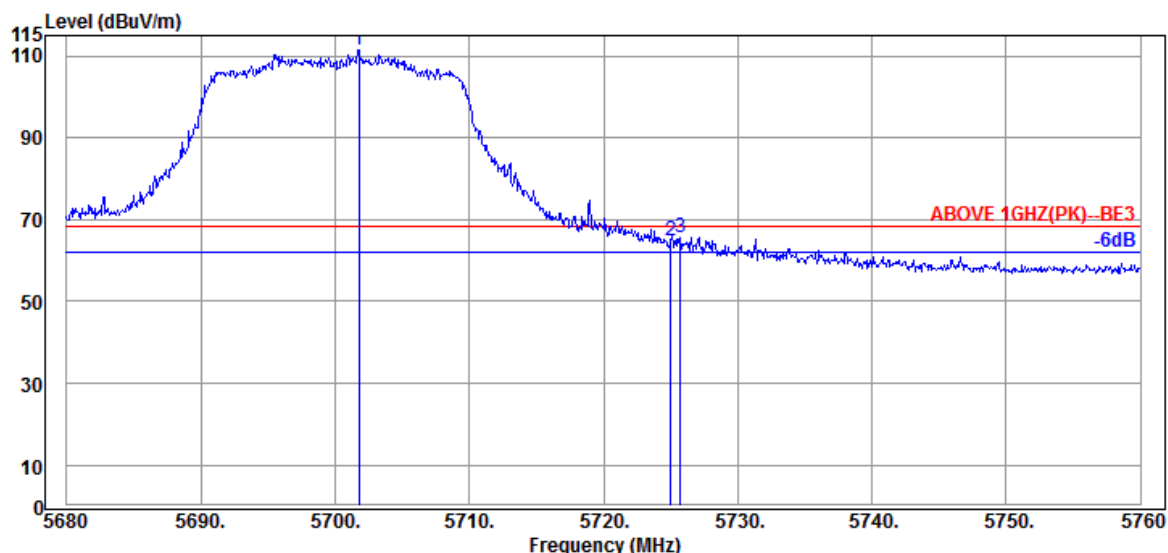

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.760	34.40	9.40	34.31	101.92	111.41	---	---	Peak
5725.040	34.67	9.42	34.32	55.15	64.92	68.20	3.28	Peak
5725.760	34.67	9.42	34.32	56.03	65.80	68.20	2.40	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

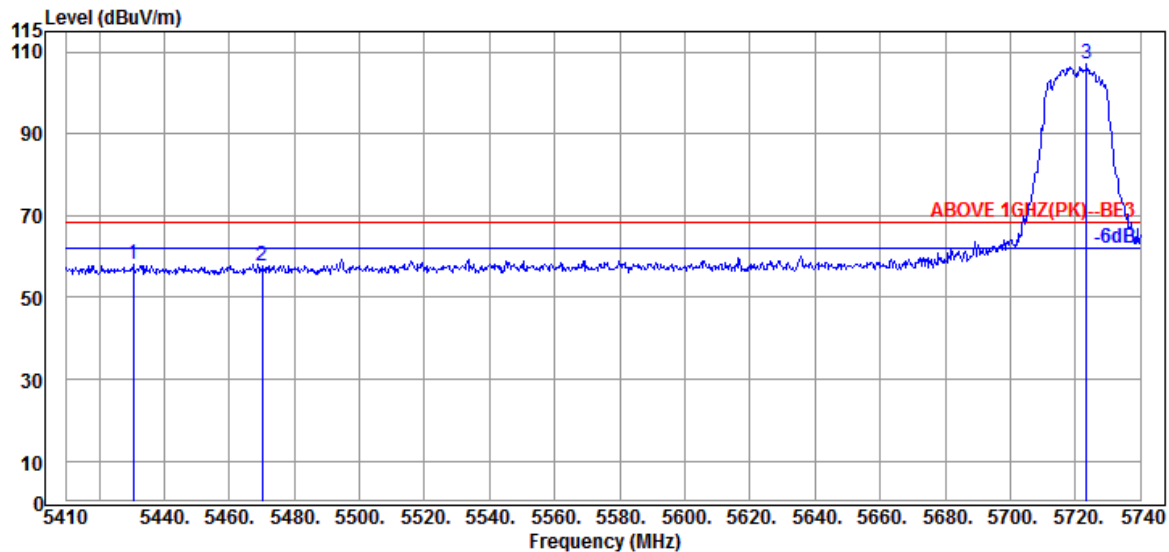

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.460	34.60	9.17	34.25	48.47	57.99	68.20	10.21	Peak
5470.060	34.47	9.20	34.24	48.24	57.67	68.20	10.53	Peak
@ 5723.500	34.67	9.42	34.32	97.27	107.04	---	---	Peak

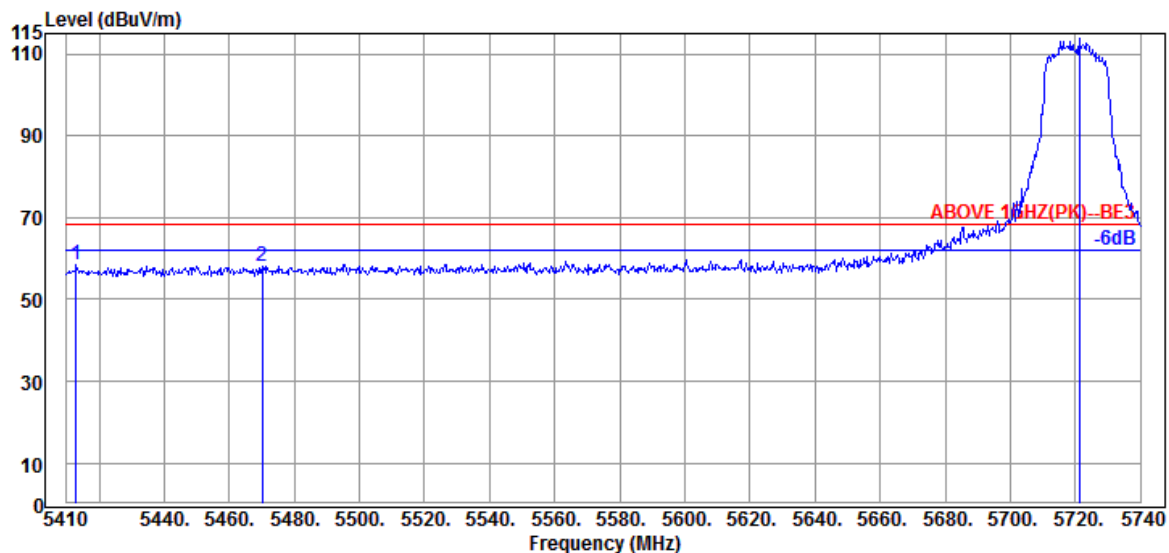

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.970	34.65	9.15	34.26	48.88	58.42	68.20	9.78	Peak
5470.060	34.47	9.20	34.24	48.47	57.90	68.20	10.30	Peak
@ 5721.190	34.53	9.42	34.32	104.09	113.72	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

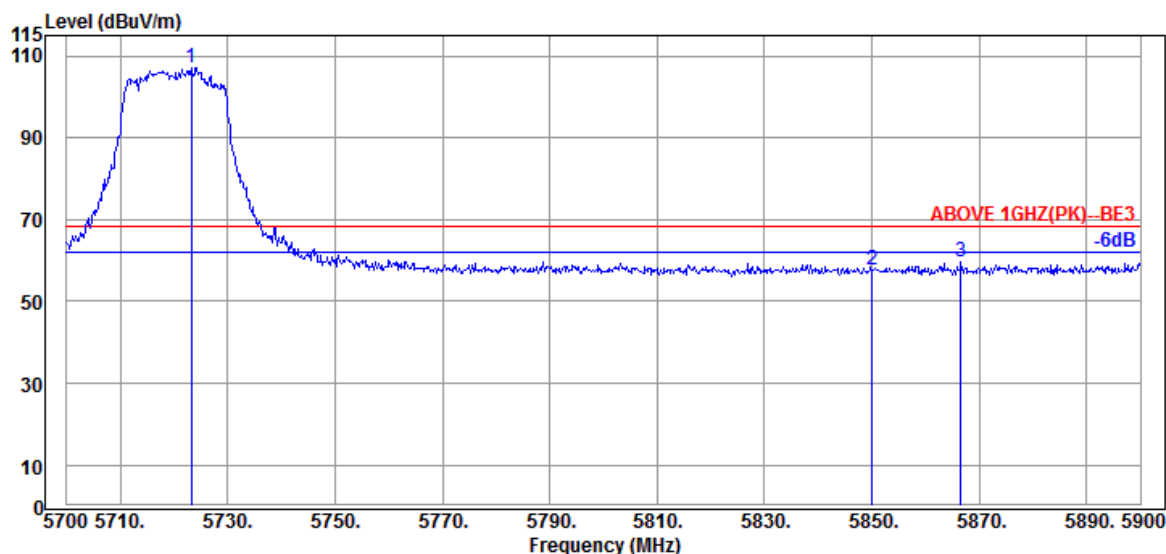

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5723.200	34.67	9.42	34.32	97.47	107.24	---	---	Peak
	5850.000	35.10	9.52	34.38	47.47	57.71	68.20	10.49	Peak
	5866.600	35.20	9.53	34.39	49.44	59.78	68.20	8.42	Peak

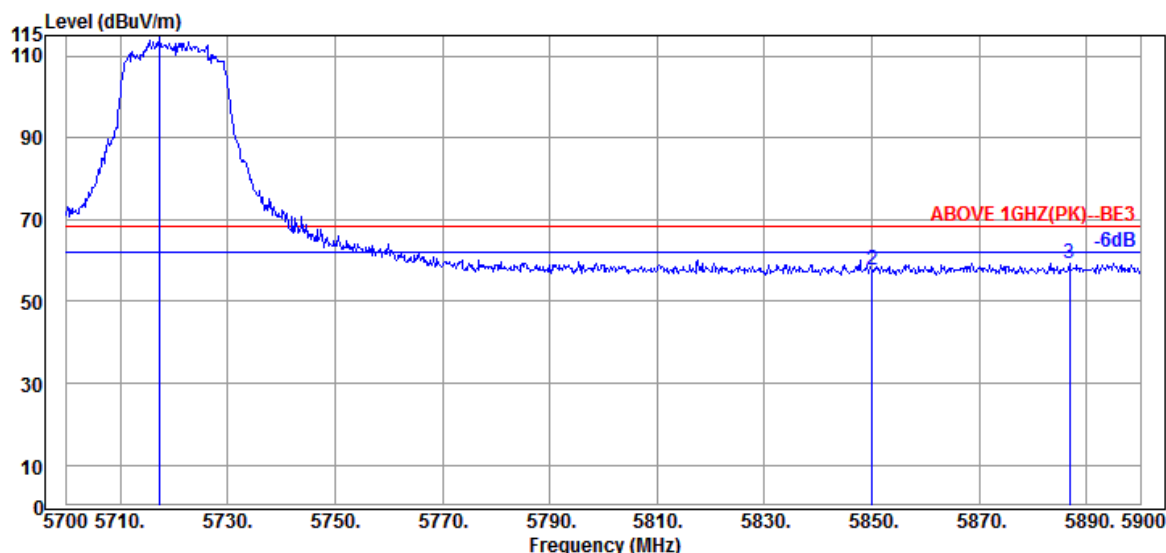

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.200	34.53	9.40	34.32	104.88	114.49	---	---	Peak
	5850.000	35.10	9.52	34.38	47.46	57.70	68.20	10.50	Peak
	5886.800	35.30	9.55	34.40	48.82	59.27	68.20	8.93	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

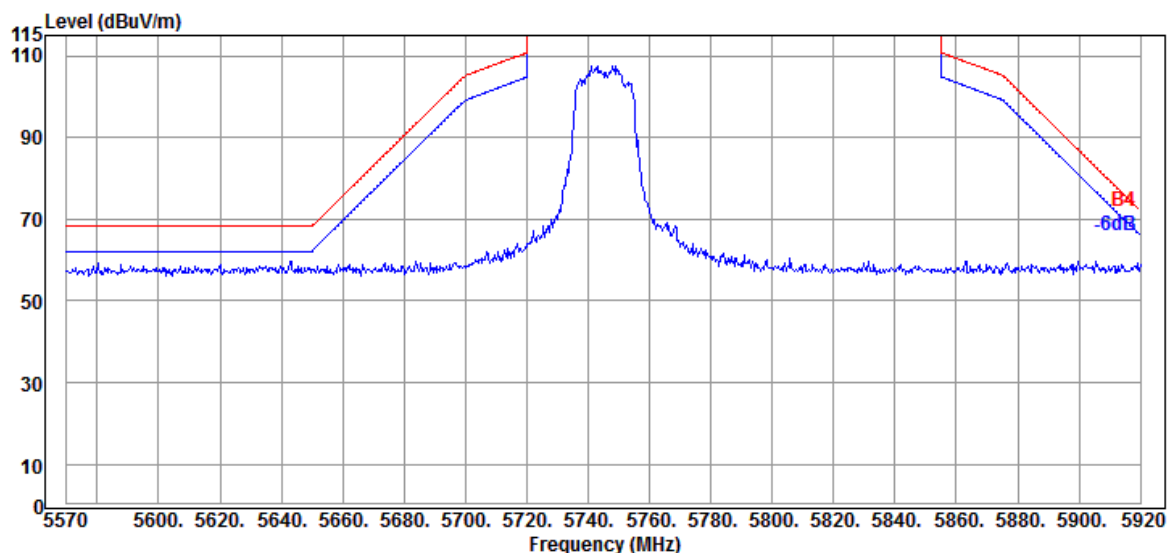

Antenna at Vertical Polarization

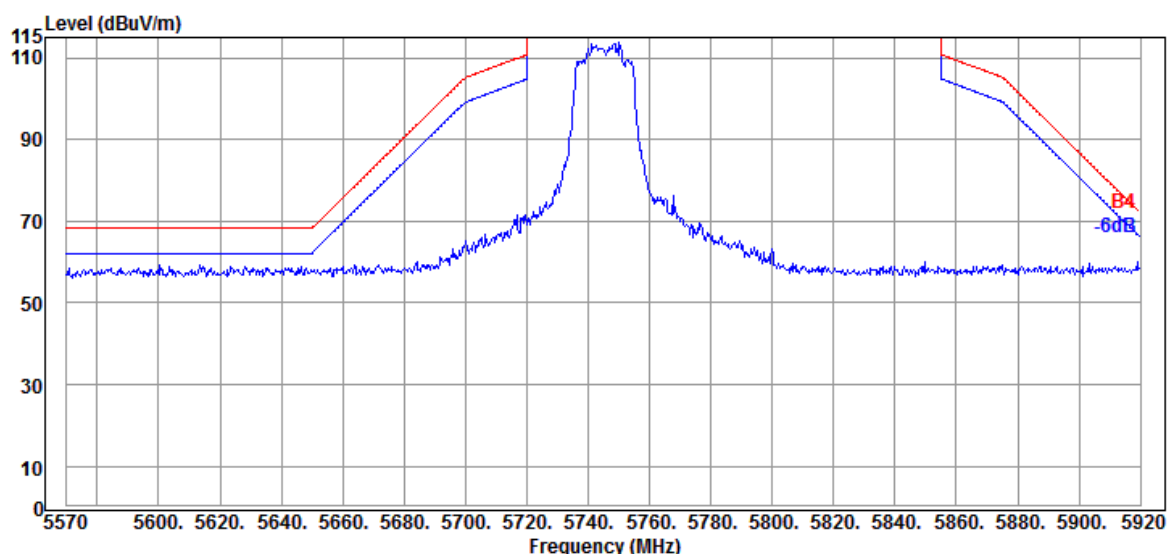


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

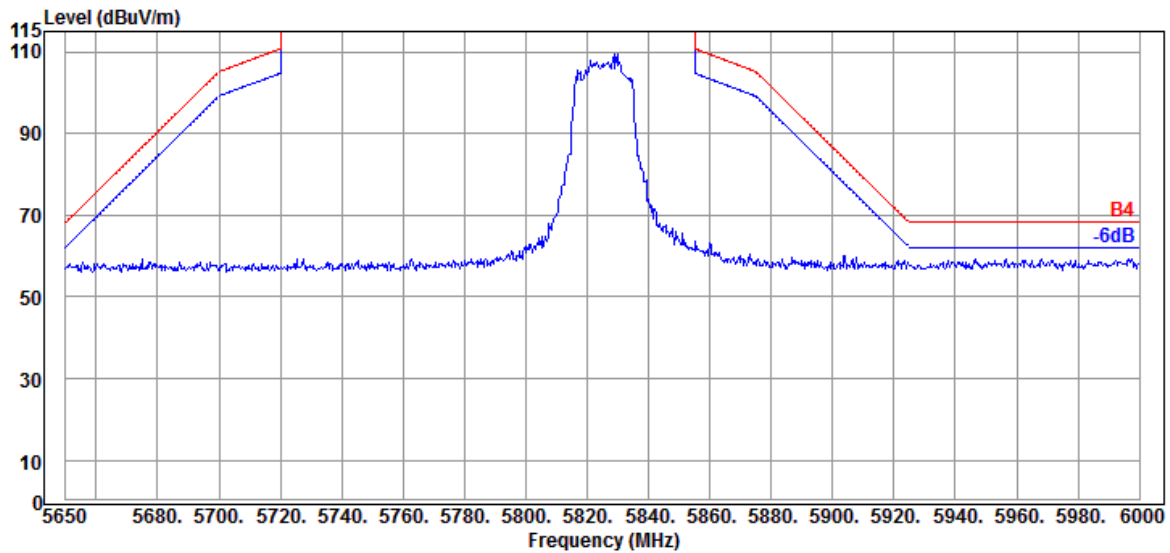

Antenna at Vertical Polarization

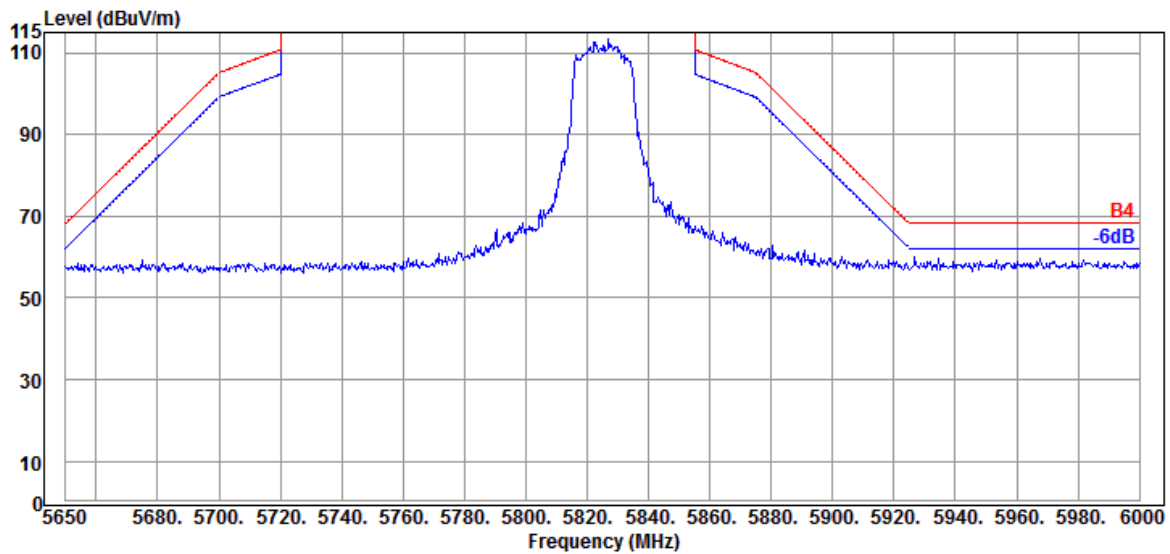

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

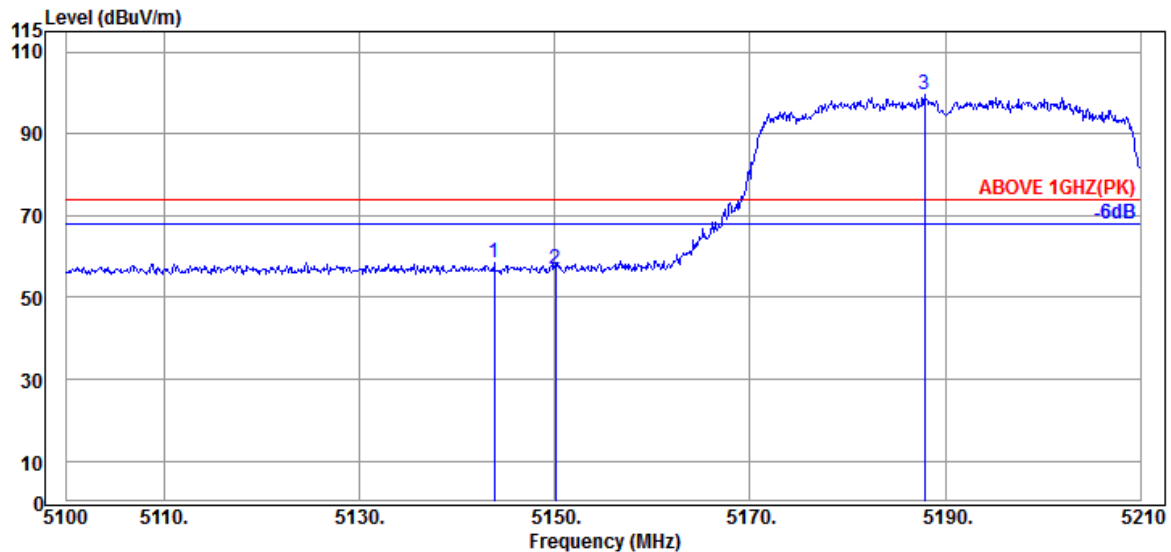

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.780	34.20	8.92	34.35	49.80	58.57	74.00	15.43	Peak
5150.050	34.20	8.92	34.35	48.28	57.05	74.00	16.95	Peak
@ 5187.890	34.20	8.95	34.34	90.77	99.58	---	---	Peak

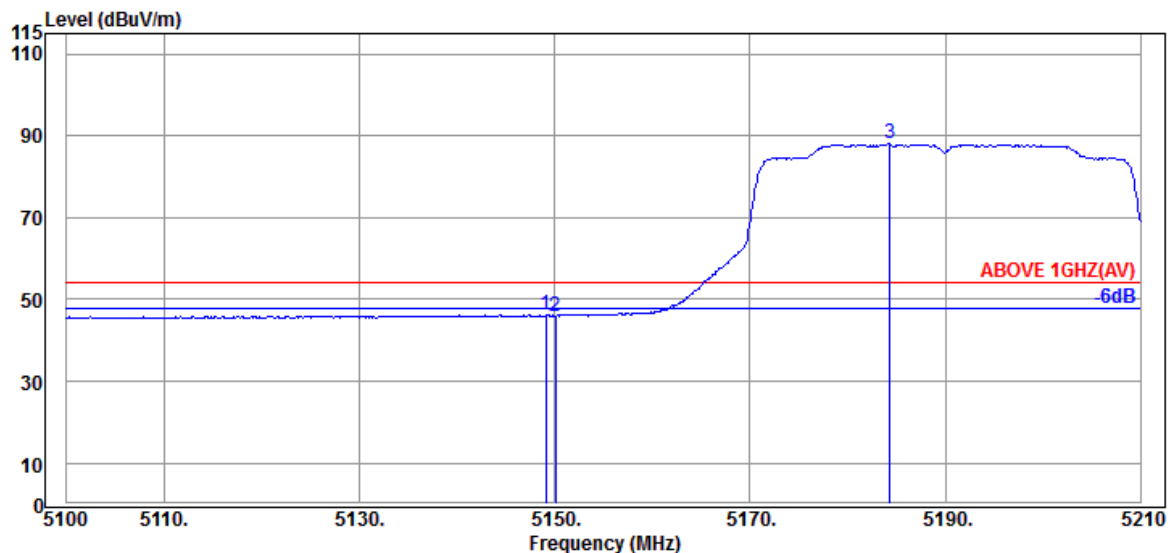

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	8.92	34.35	37.37	46.14	54.00	7.86	Average
5150.050	34.20	8.92	34.35	37.24	46.01	54.00	7.99	Average
@ 5184.370	34.20	8.95	34.34	79.32	88.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

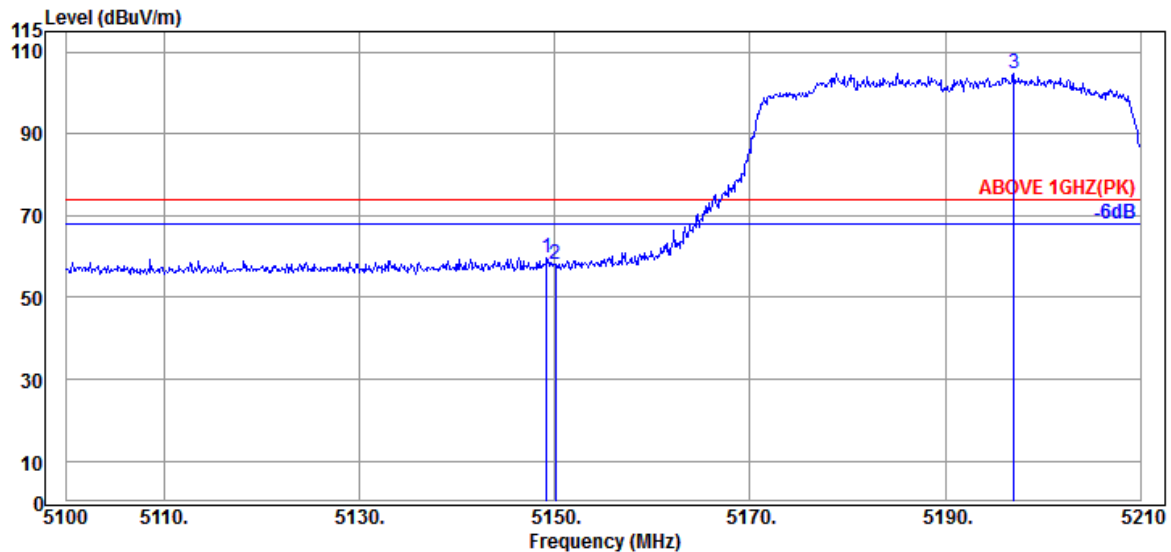

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.20	8.92	34.35	50.81	59.58	74.00	14.42	Peak
5150.050	34.20	8.92	34.35	49.25	58.02	74.00	15.98	Peak
@ 5197.020	34.20	8.96	34.33	95.93	104.76	---	---	Peak

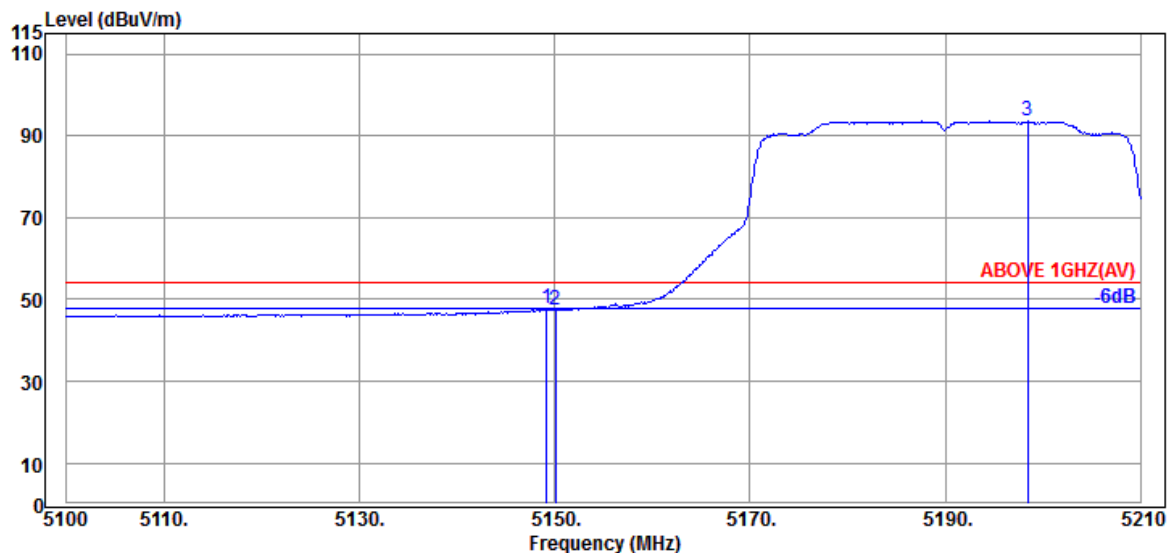

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.20	8.92	34.35	38.92	47.69	54.00	6.31	Average
5150.050	34.20	8.92	34.35	38.80	47.57	54.00	6.43	Average
@ 5198.450	34.20	8.96	34.33	84.69	93.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

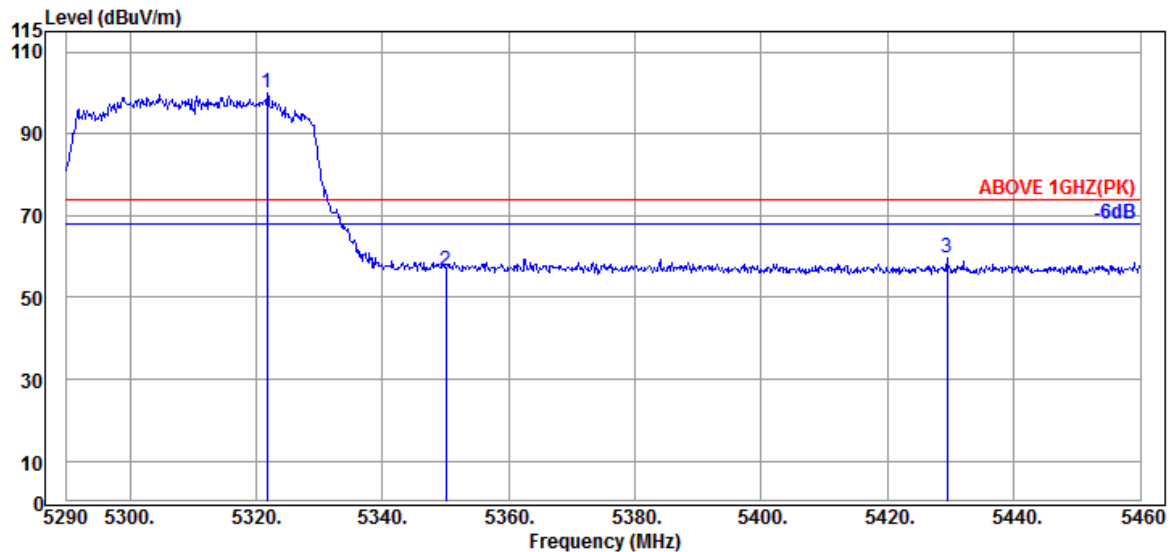

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5321.790	34.53	9.07	34.29	90.84	100.15	---	---	Peak
	5350.010	34.60	9.10	34.27	46.90	56.33	74.00	17.67	Peak
	5429.400	34.60	9.17	34.25	50.11	59.63	74.00	14.37	Peak

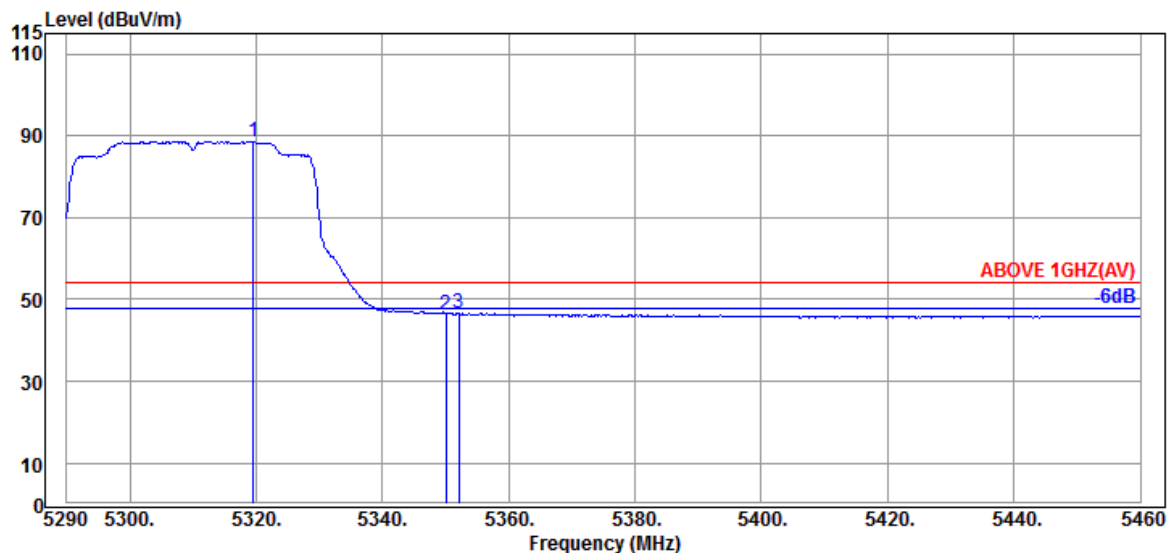

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5319.580	34.53	9.07	34.29	79.34	88.65	---	---	Average
	5350.010	34.60	9.10	34.27	36.97	46.40	54.00	7.60	Average
	5352.050	34.60	9.10	34.27	37.29	46.72	54.00	7.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

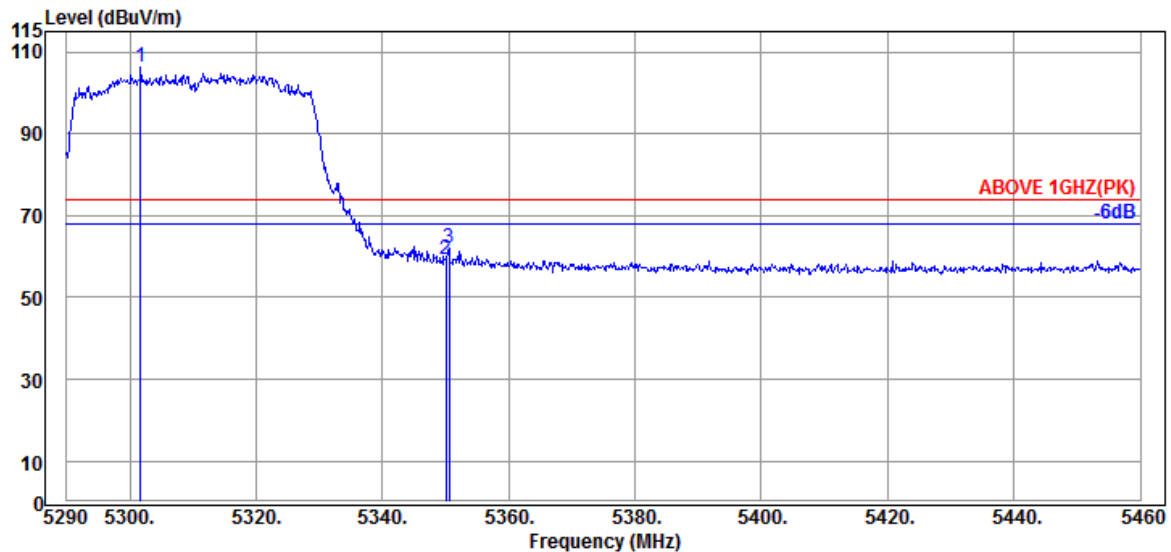

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.730	34.50	9.05	34.29	97.05	106.31	---	---	Peak
5350.010	34.60	9.10	34.27	49.70	59.13	74.00	14.87	Peak
5350.520	34.60	9.10	34.27	52.70	62.13	74.00	11.87	Peak

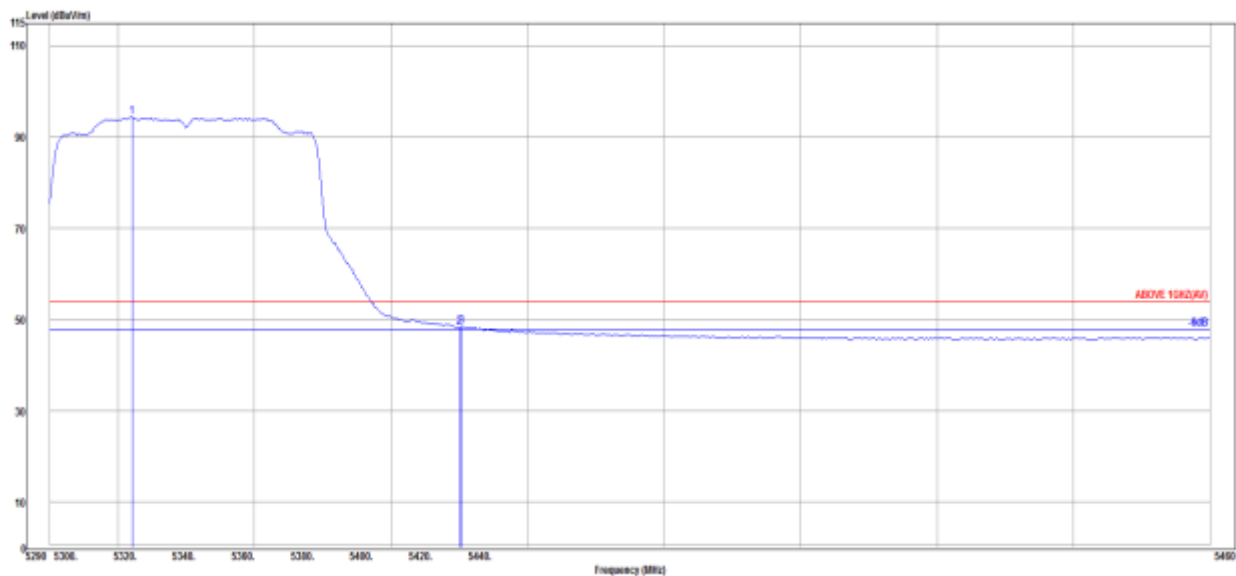

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.070	34.50	9.05	34.29	85.13	94.39	---	---	Average
5350.010	34.60	9.10	34.27	38.98	48.41	54.00	5.59	Average
5350.350	34.60	9.10	34.27	39.14	48.57	54.00	5.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

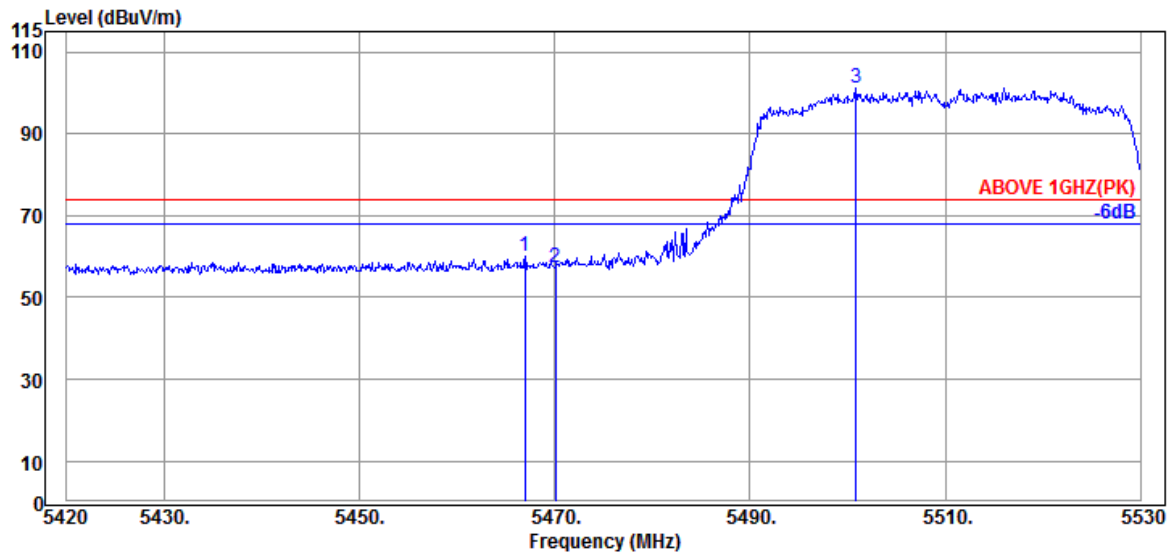

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.970	34.47	9.20	34.24	50.62	60.05	74.00	13.95	Peak
5470.050	34.47	9.20	34.24	48.06	57.49	74.00	16.51	Peak
@ 5500.850	34.40	9.23	34.24	91.87	101.26	---	---	Peak

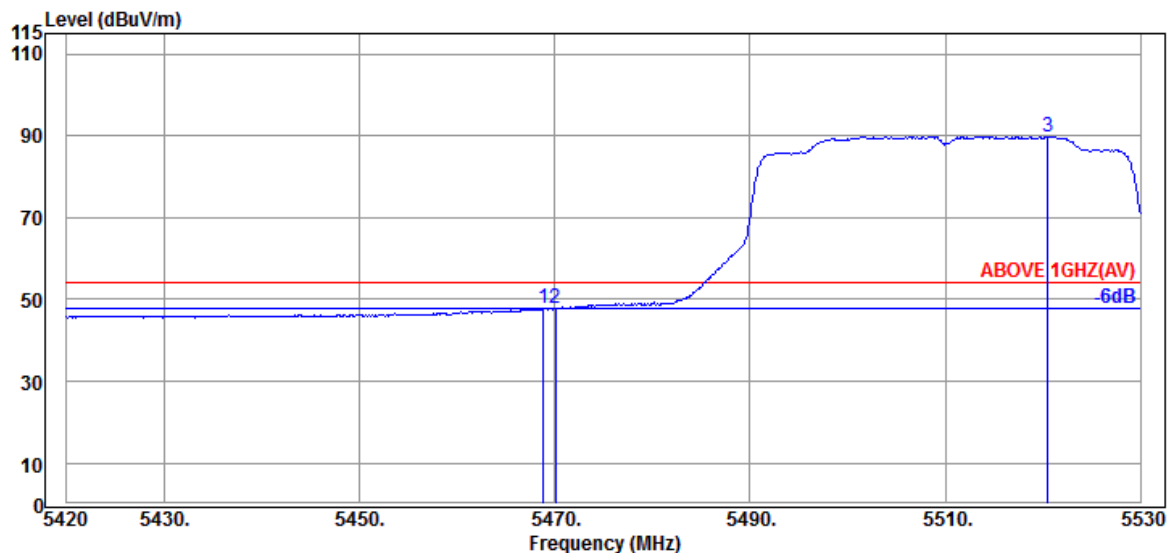

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.47	9.20	34.24	38.31	47.74	54.00	6.26	Average
5470.050	34.47	9.20	34.24	38.39	47.82	54.00	6.18	Average
@ 5520.540	34.37	9.24	34.24	80.51	89.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

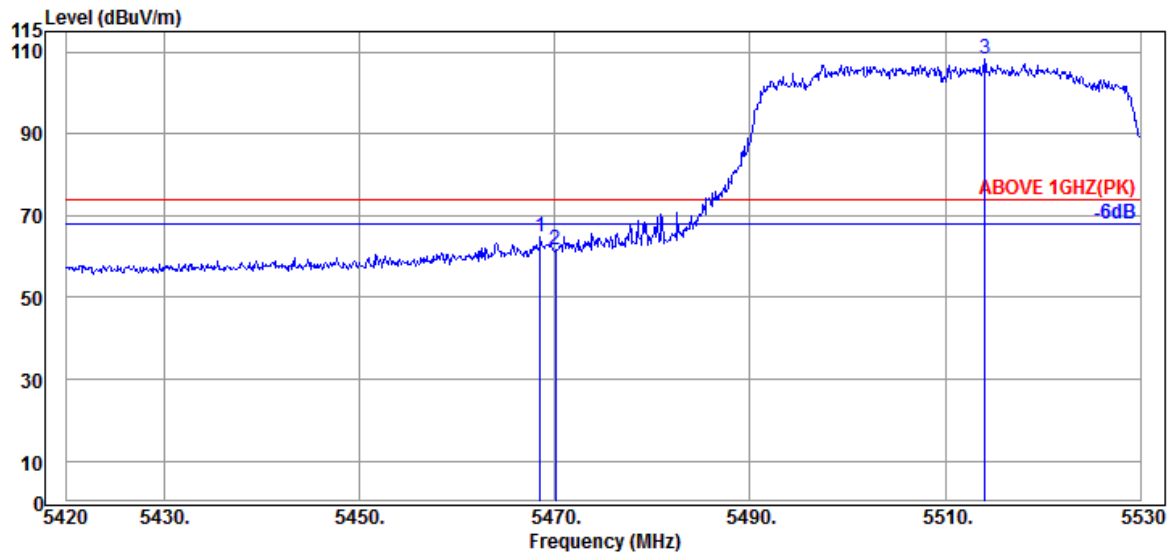

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.510	34.47	9.20	34.24	55.40	64.83	74.00	9.17	Peak
5470.050	34.47	9.20	34.24	52.05	61.48	74.00	12.52	Peak
@ 5514.050	34.37	9.24	34.24	98.85	108.22	---	---	Peak

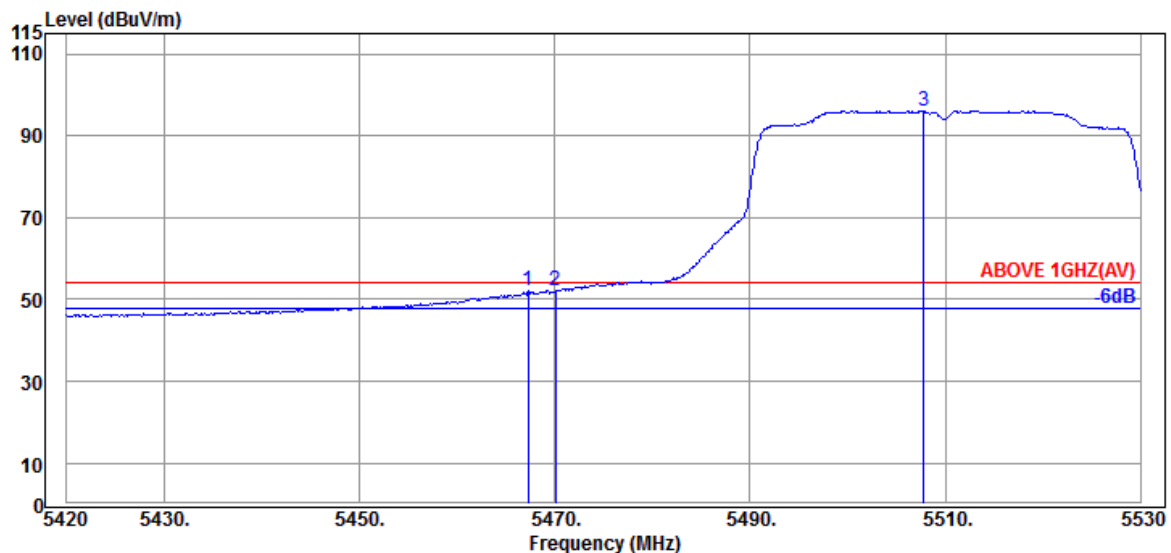

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.47	9.20	34.24	42.62	52.05	54.00	1.95	Average
5470.050	34.47	9.20	34.24	42.69	52.12	54.00	1.88	Average
@ 5507.780	34.40	9.23	34.24	86.78	96.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

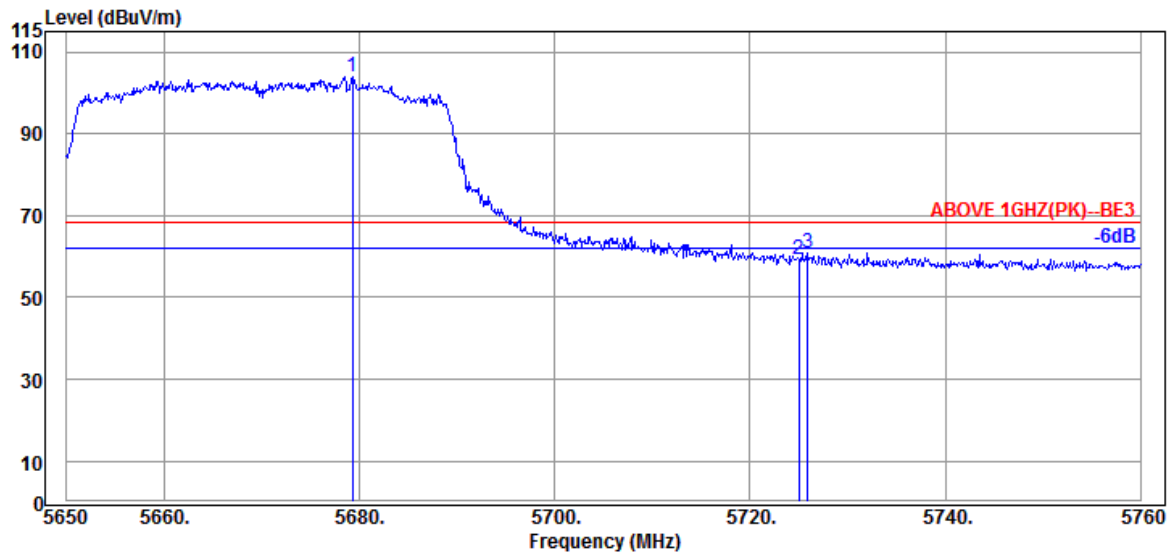

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5679.260	34.40	9.37	34.31	94.54	104.00	---	---	Peak
	5725.020	34.67	9.42	34.32	49.61	59.38	68.20	8.82	Peak
	5725.900	34.67	9.42	34.32	51.27	61.04	68.20	7.16	Peak

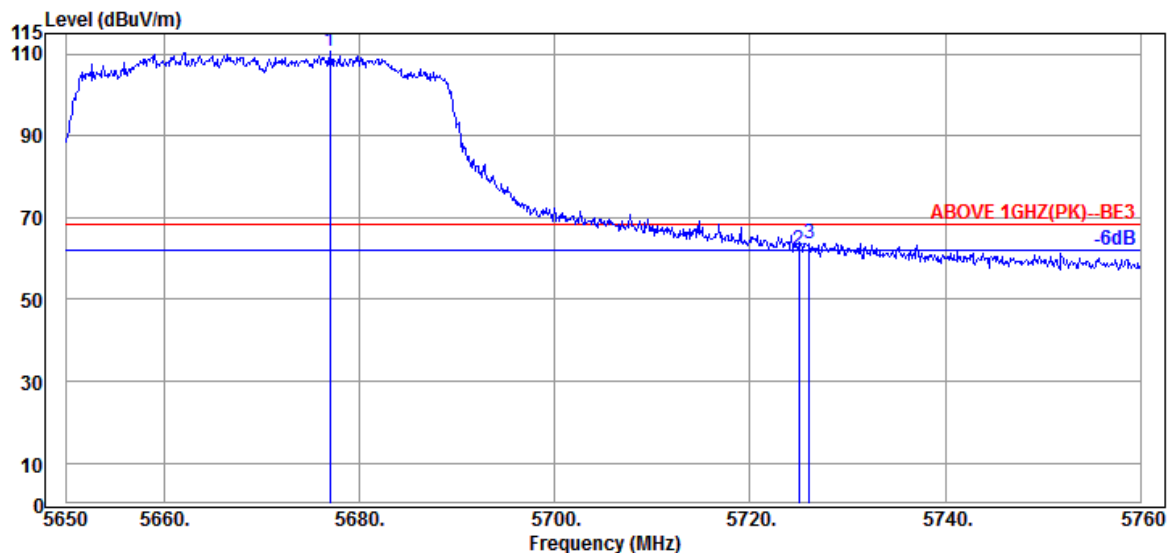

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5676.950	34.40	9.37	34.30	101.13	110.60	---	---	Peak
	5725.020	34.67	9.42	34.32	52.39	62.16	68.20	6.04	Peak
	5726.120	34.67	9.42	34.32	53.98	63.75	68.20	4.45	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

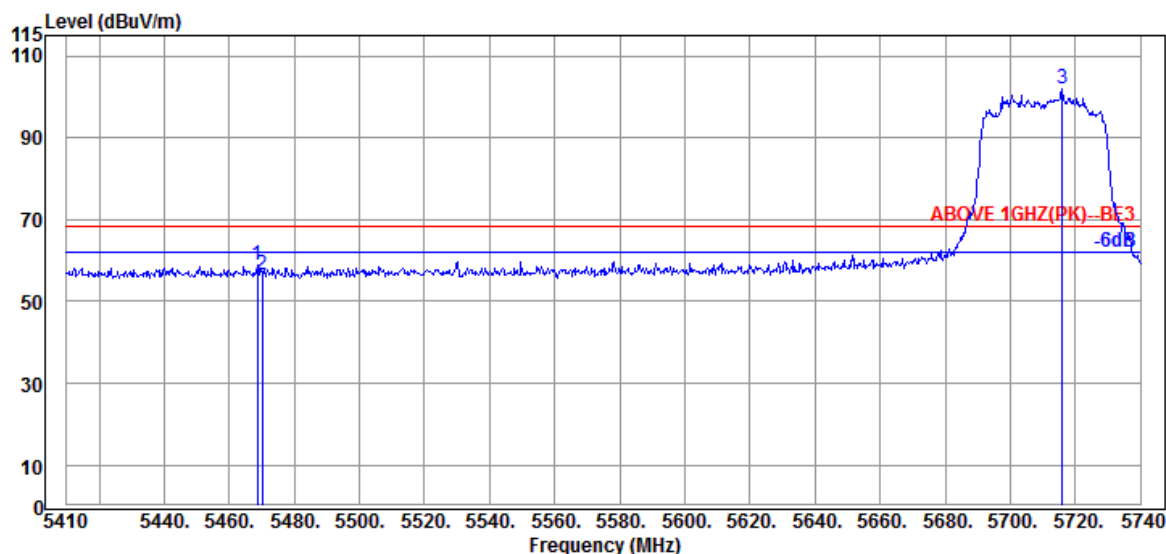

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.47	9.20	34.24	49.29	58.72	68.20	9.48	Peak
5470.060	34.47	9.20	34.24	47.19	56.62	68.20	11.58	Peak
@ 5715.910	34.53	9.40	34.32	92.16	101.77	---	---	Peak

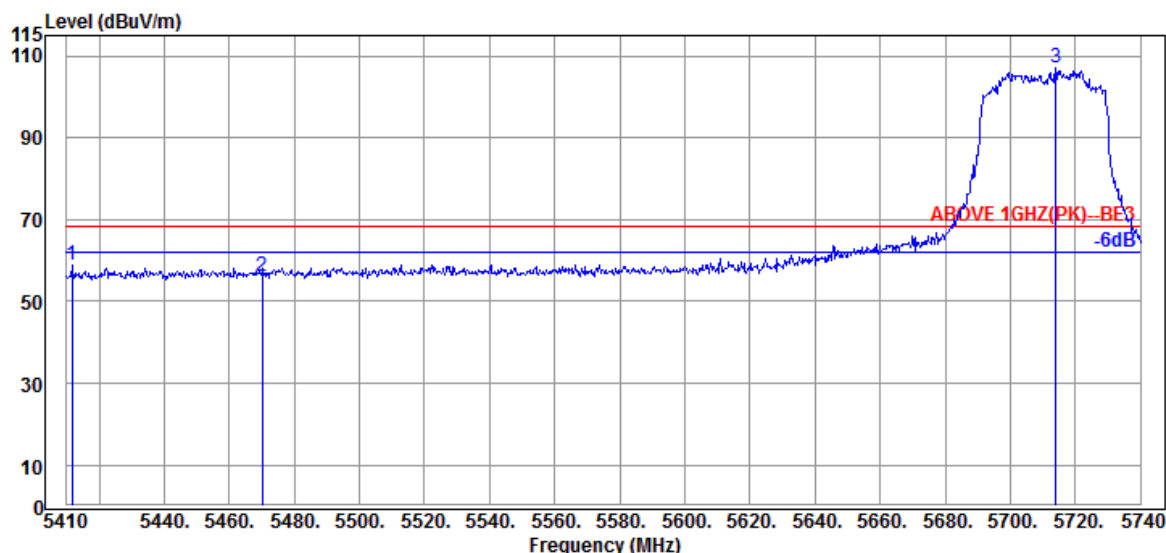

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.650	34.65	9.15	34.26	49.19	58.73	68.20	9.47	Peak
5470.060	34.47	9.20	34.24	46.67	56.10	68.20	12.10	Peak
@ 5713.930	34.53	9.40	34.32	97.29	106.90	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

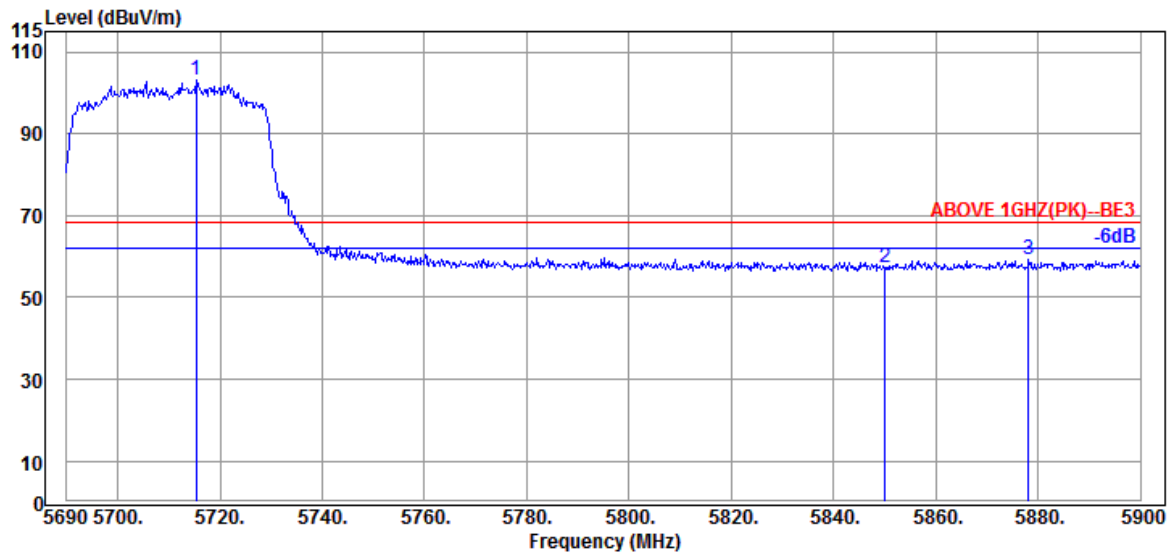

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5715.410	34.53	9.40	34.32	93.47	103.08	---	---	Peak
	5850.020	35.10	9.52	34.38	46.98	57.22	68.20	10.98	Peak
	5878.160	35.30	9.55	34.39	48.85	59.31	68.20	8.89	Peak

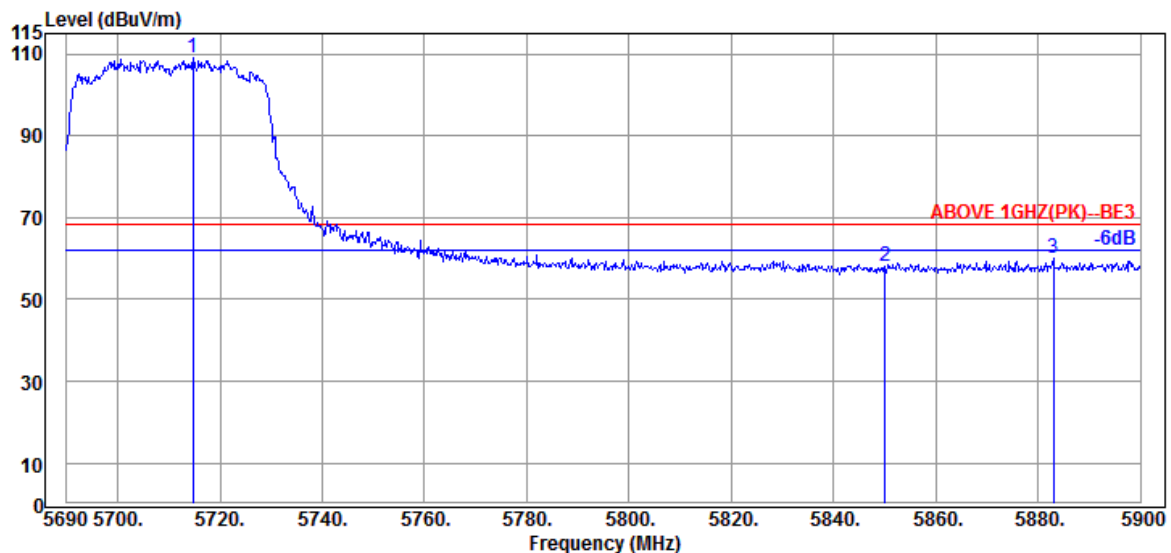

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5714.780	34.53	9.40	34.32	99.32	108.93	---	---	Peak
	5850.020	35.10	9.52	34.38	47.93	58.17	68.20	10.03	Peak
	5882.990	35.30	9.55	34.39	49.52	59.98	68.20	8.22	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

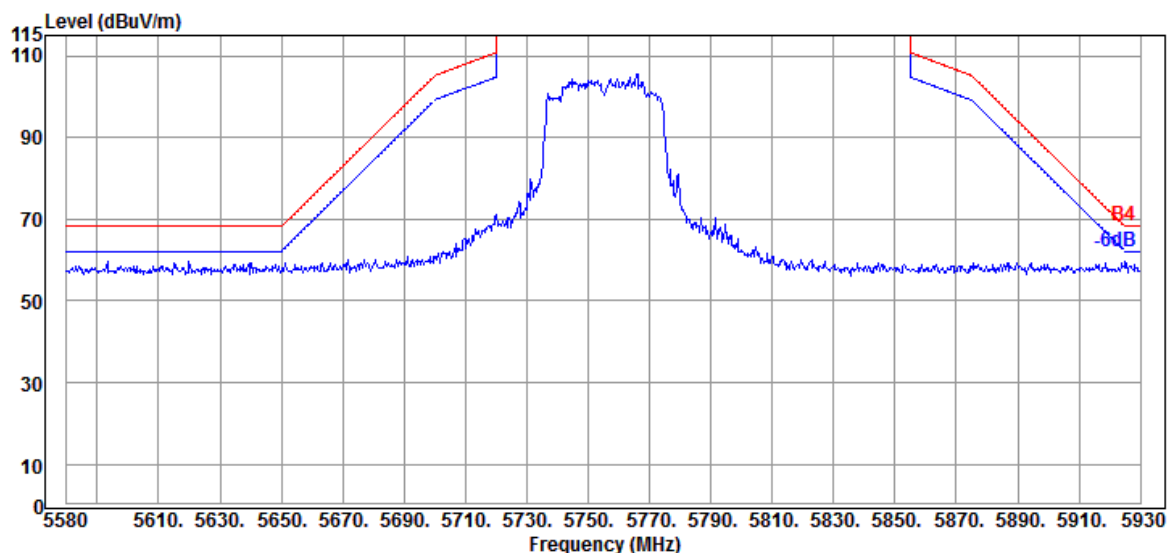

Antenna at Vertical Polarization

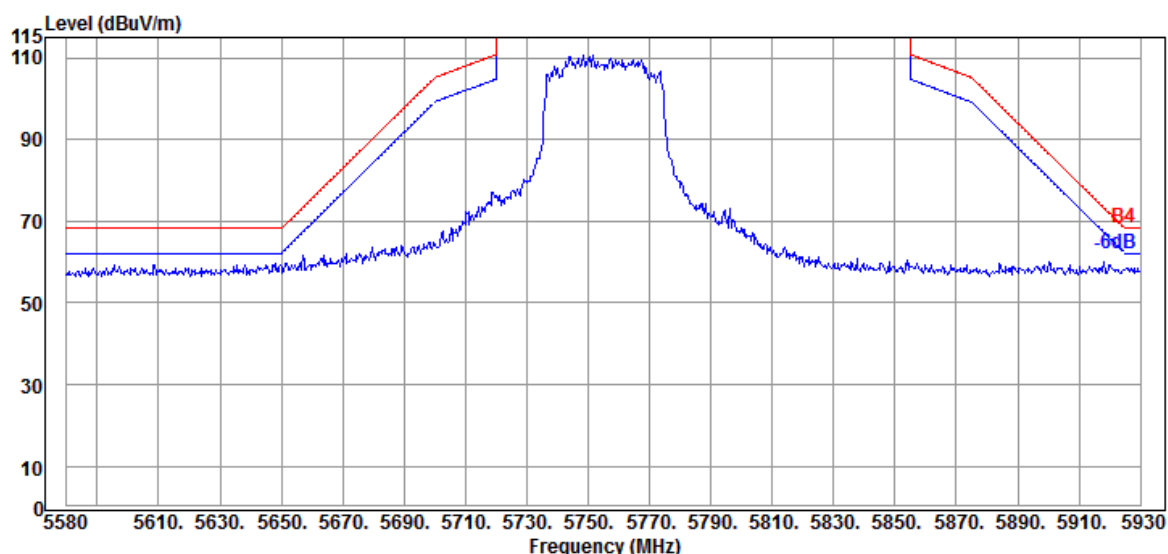


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

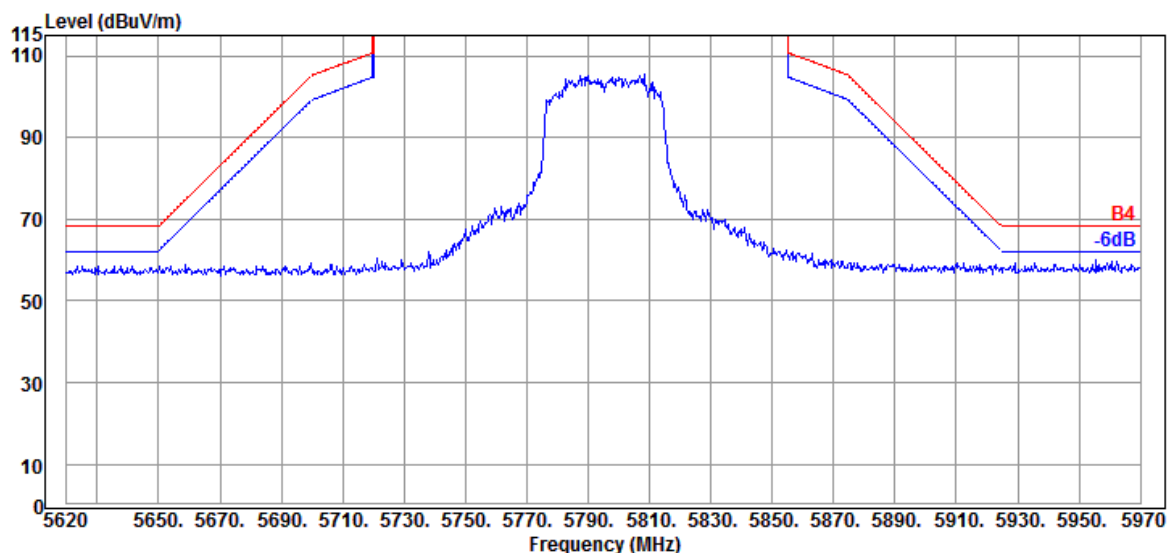

Antenna at Vertical Polarization

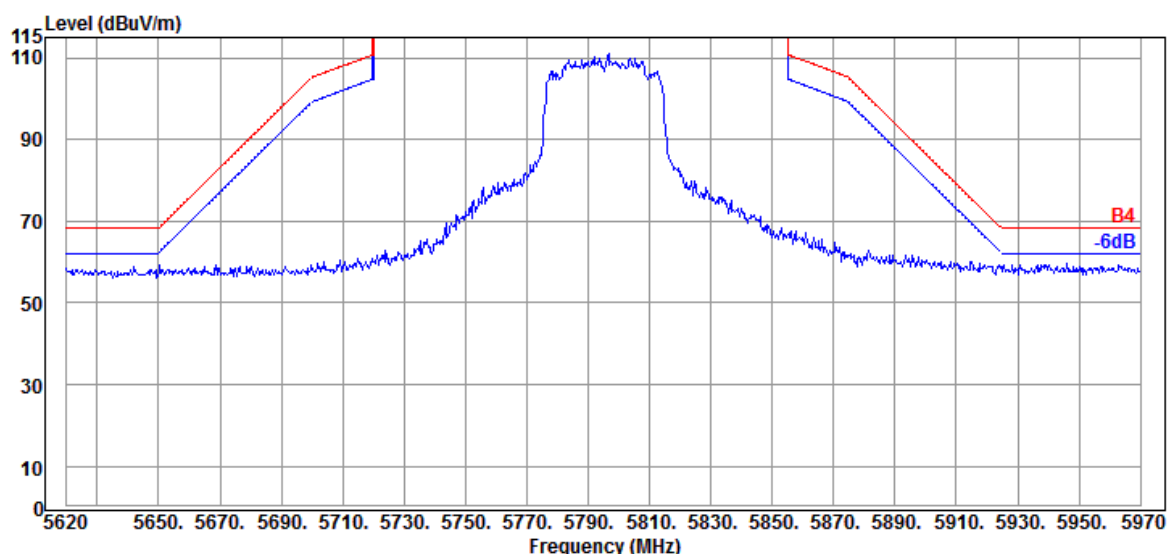


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

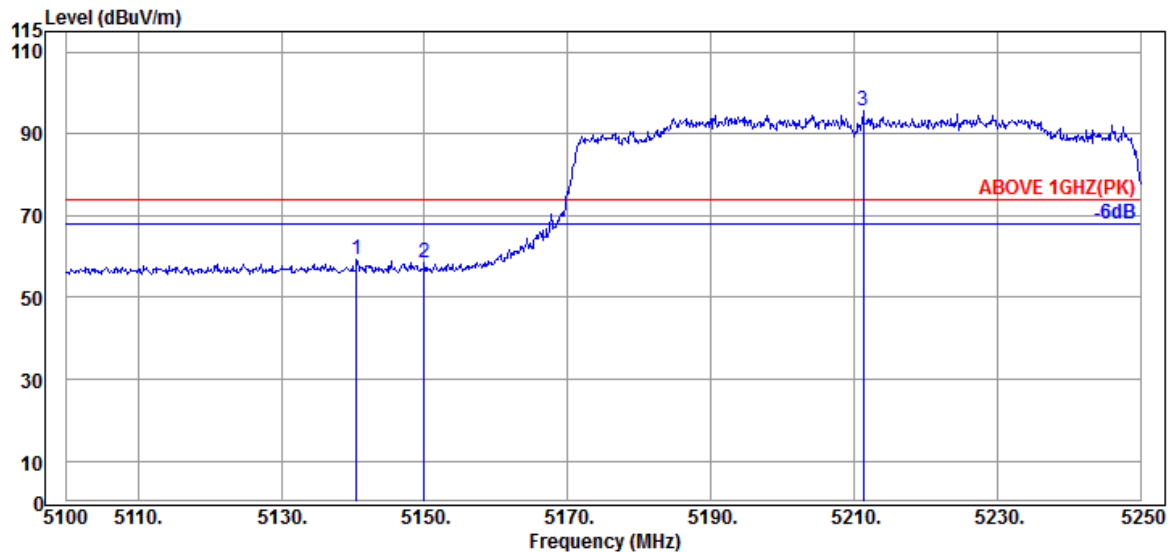

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.500	34.17	8.92	34.36	50.60	59.33	74.00	14.67	Peak
5149.950	34.20	8.92	34.35	49.75	58.52	74.00	15.48	Peak
@ 5211.300	34.25	8.98	34.33	86.61	95.51	---	---	Peak

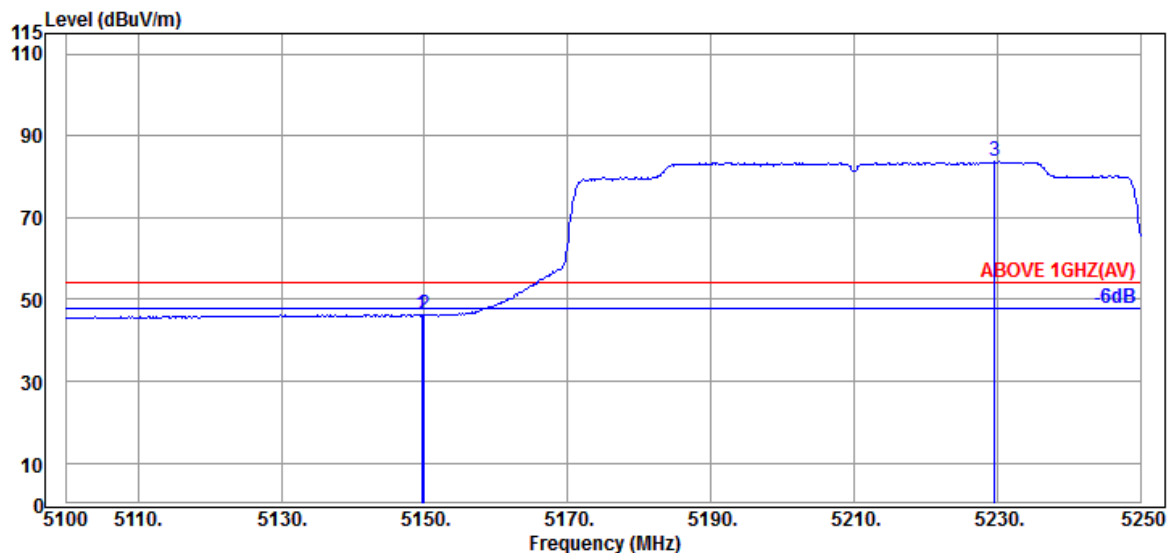

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	8.92	34.35	37.44	46.21	54.00	7.79	Average
5149.950	34.20	8.92	34.35	37.37	46.14	54.00	7.86	Average
@ 5229.600	34.30	8.99	34.32	74.73	83.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

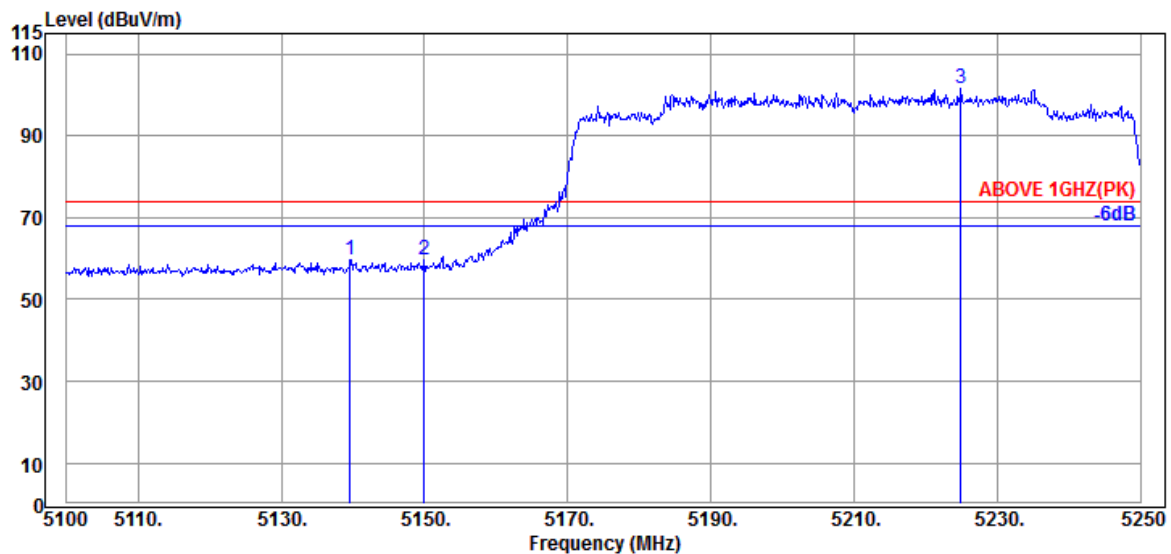

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.600	34.17	8.92	34.36	50.82	59.55	74.00	14.45	Peak
5149.950	34.20	8.92	34.35	50.84	59.61	74.00	14.39	Peak
@ 5224.950	34.30	8.99	34.32	92.65	101.62	---	---	Peak

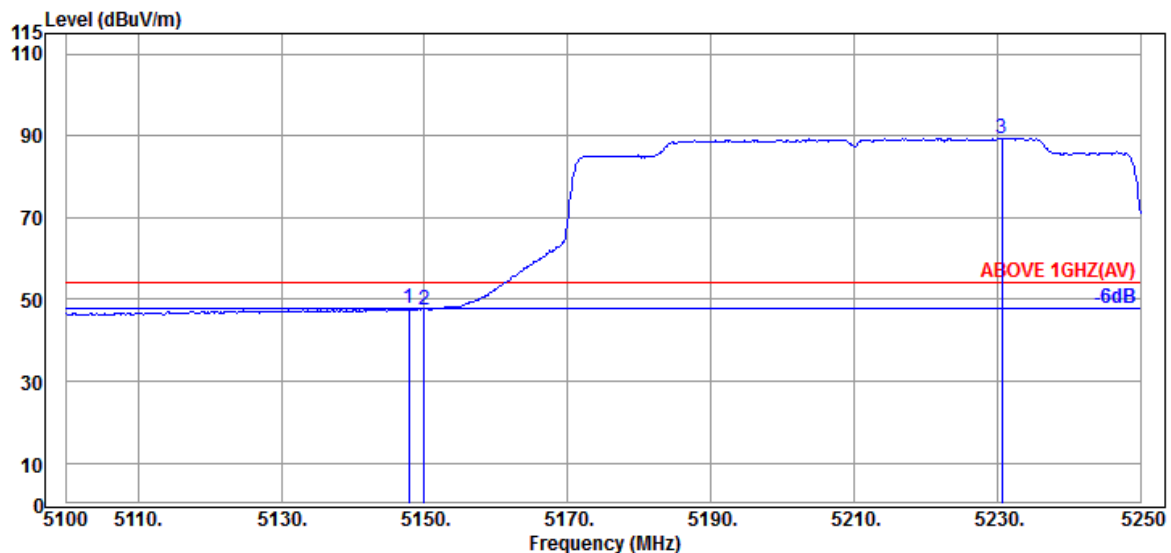

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	34.20	8.92	34.35	39.01	47.78	54.00	6.22	Average
5149.950	34.20	8.92	34.35	38.78	47.55	54.00	6.45	Average
@ 5230.650	34.30	8.99	34.32	80.38	89.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239


Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

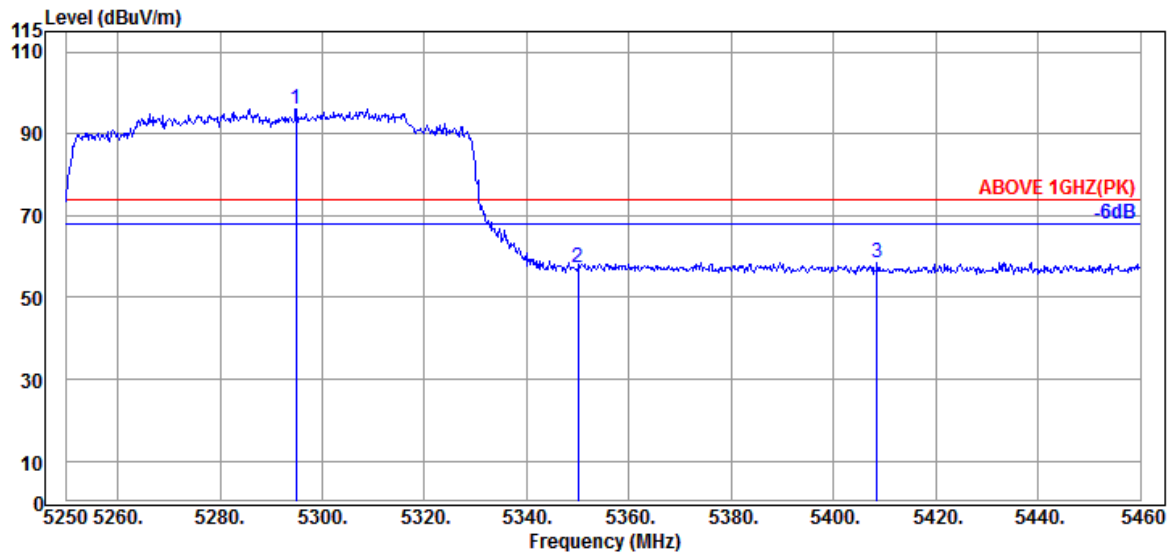

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5294.940	34.50	9.05	34.30	86.85	96.10	---	---	Peak
	5349.960	34.60	9.10	34.27	47.89	57.32	74.00	16.68	Peak
	5408.550	34.65	9.14	34.26	48.92	58.45	74.00	15.55	Peak

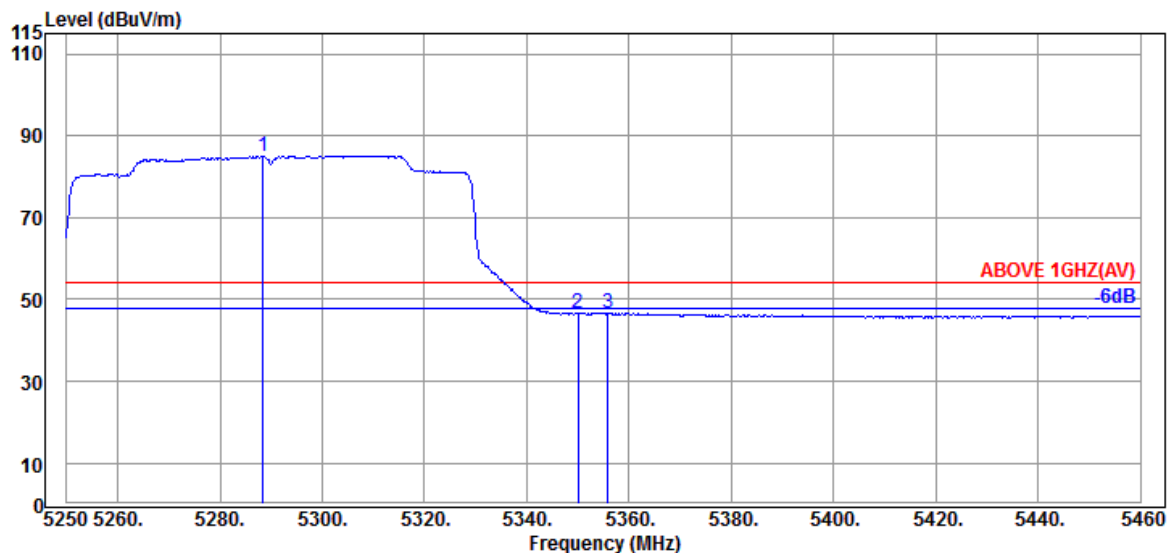

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5288.430	34.47	9.04	34.30	75.92	85.13	---	---	Average
	5349.960	34.60	9.10	34.27	37.17	46.60	54.00	7.40	Average
	5355.840	34.63	9.10	34.27	37.33	46.79	54.00	7.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

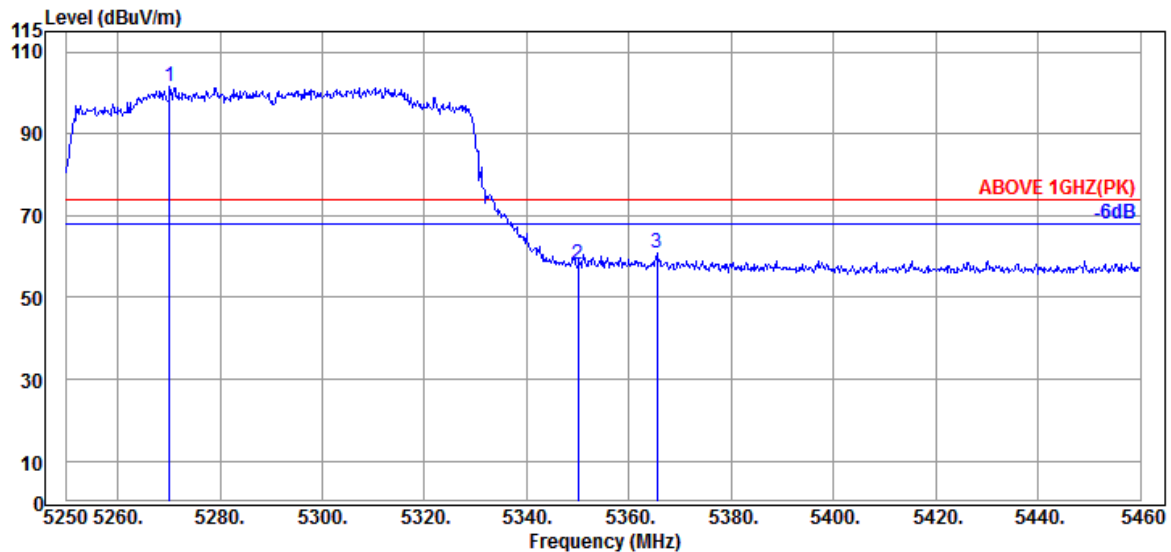

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.160	34.43	9.02	34.31	92.43	101.57	---	---	Peak
5349.960	34.60	9.10	34.27	48.58	58.01	74.00	15.99	Peak
5365.500	34.63	9.11	34.27	51.32	60.79	74.00	13.21	Peak

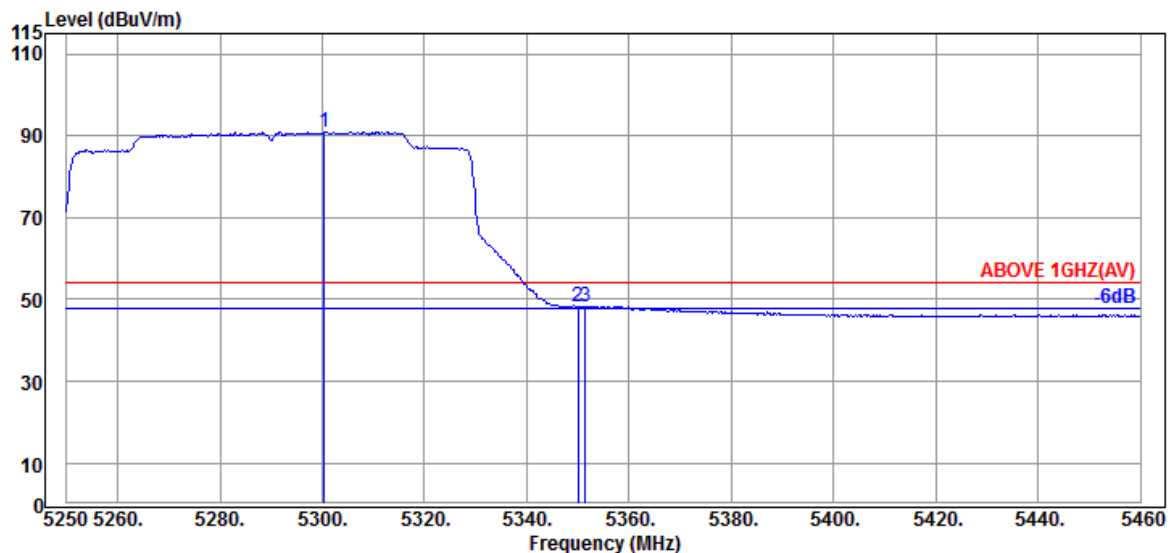

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.400	34.50	9.05	34.29	81.73	90.99	---	---	Average
5349.960	34.60	9.10	34.27	38.83	48.26	54.00	5.74	Average
5351.430	34.60	9.10	34.27	38.95	48.38	54.00	5.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

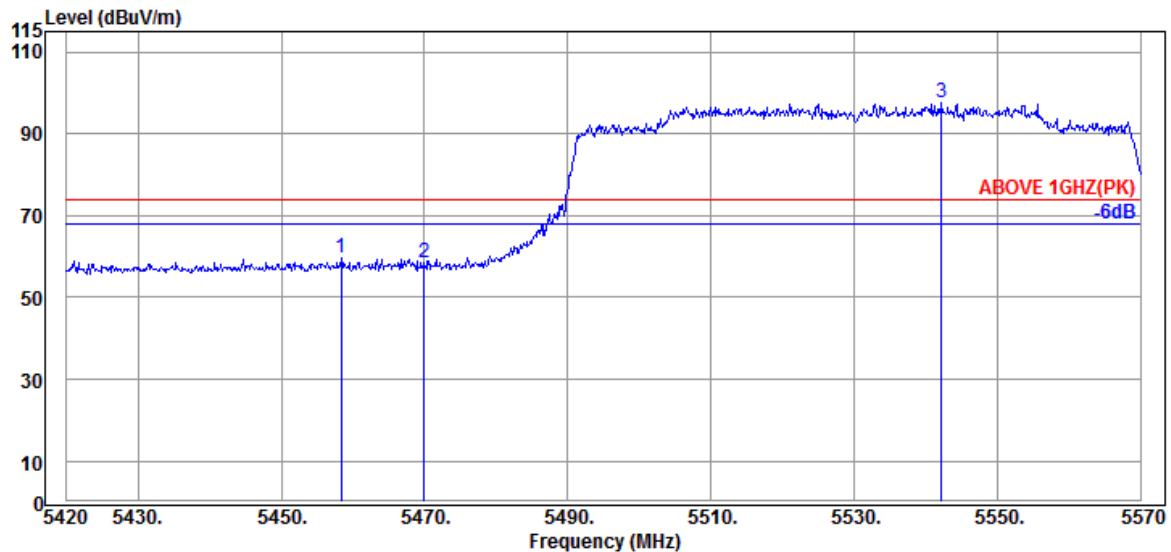

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.50	9.18	34.24	50.14	59.58	74.00	14.42	Peak
5469.950	34.47	9.20	34.24	48.97	58.40	74.00	15.60	Peak
@ 5542.250	34.33	9.26	34.25	88.45	97.79	---	---	Peak

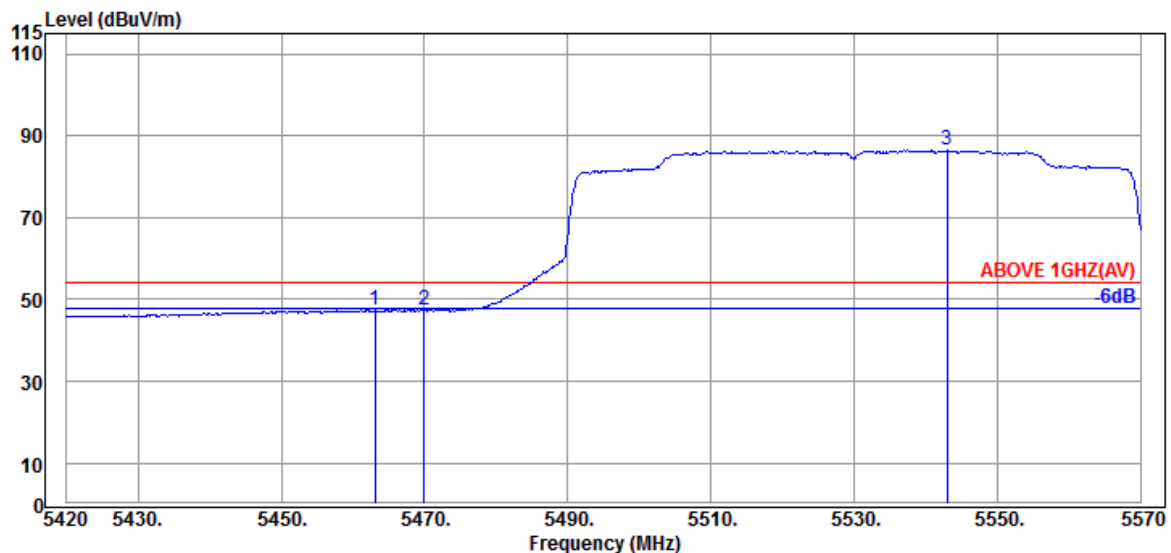

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.050	34.50	9.20	34.24	38.02	47.48	54.00	6.52	Average
5469.950	34.47	9.20	34.24	38.02	47.45	54.00	6.55	Average
@ 5543.000	34.33	9.26	34.25	77.09	86.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

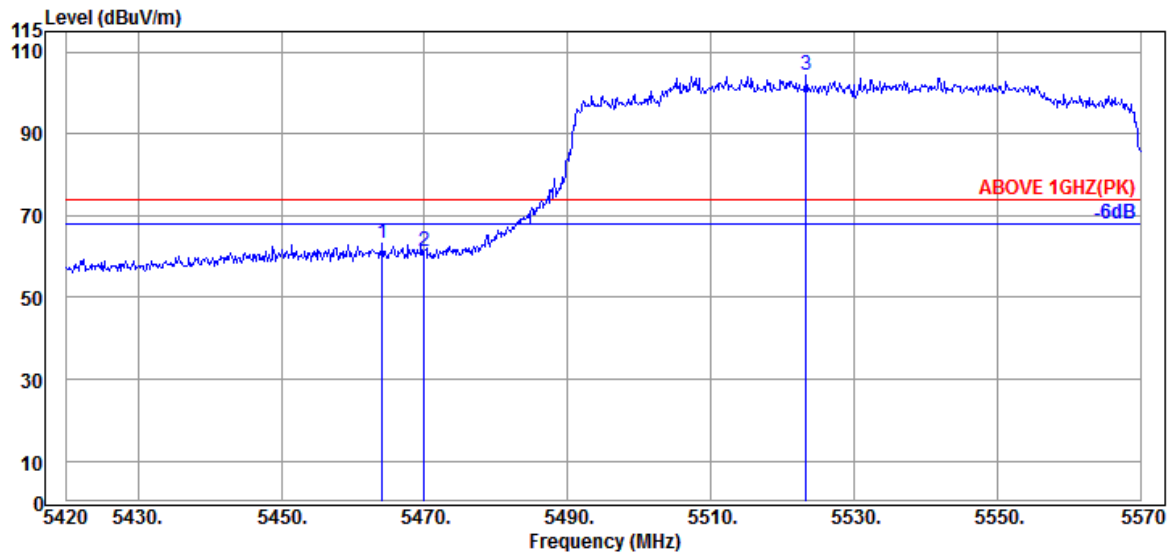

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.47	9.20	34.24	53.75	63.18	74.00	10.82	Peak
5469.950	34.47	9.20	34.24	51.89	61.32	74.00	12.68	Peak
@ 5523.350	34.37	9.24	34.24	95.04	104.41	---	---	Peak

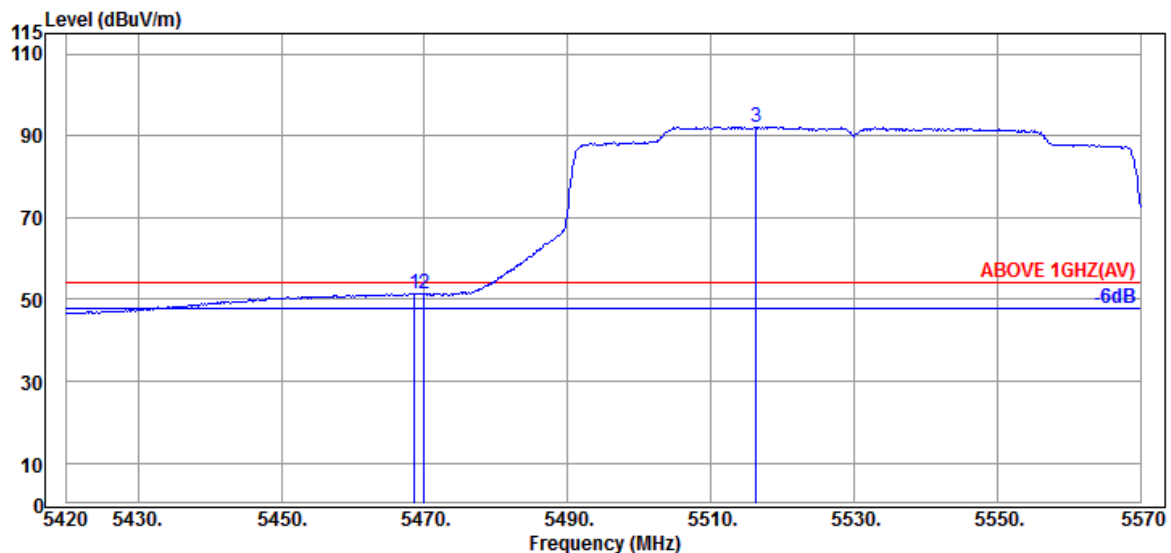

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.47	9.20	34.24	41.97	51.40	54.00	2.60	Average
5469.950	34.47	9.20	34.24	41.83	51.26	54.00	2.74	Average
@ 5516.300	34.37	9.24	34.24	82.90	92.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

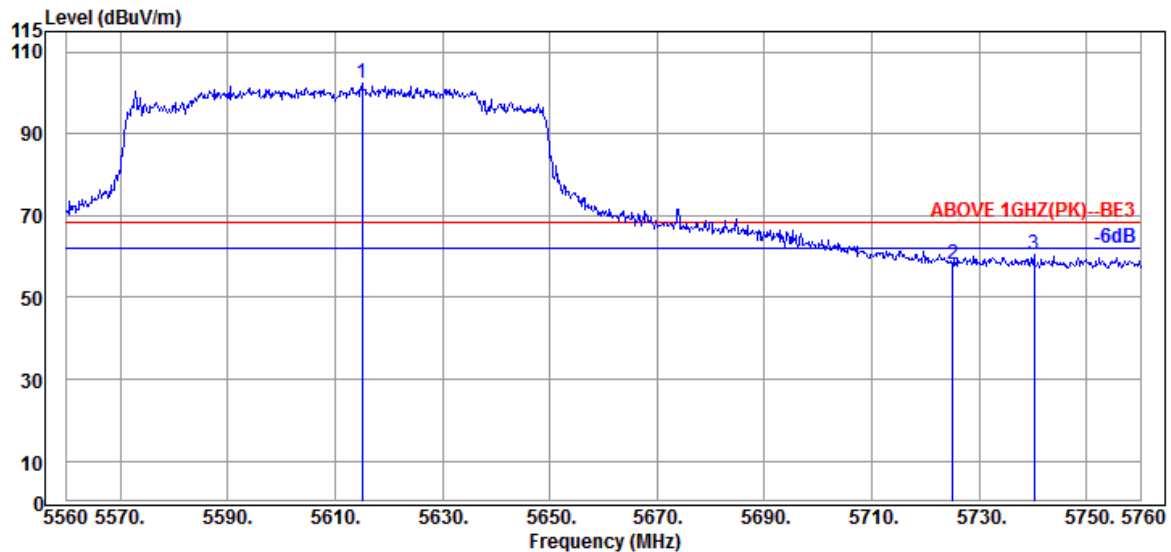

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5615.000	34.40	9.31	34.28	92.86	102.29	---	---	Peak
	5725.000	34.67	9.42	34.32	48.26	58.03	68.20	10.17	Peak
	5740.200	34.80	9.43	34.33	50.39	60.29	68.20	7.91	Peak

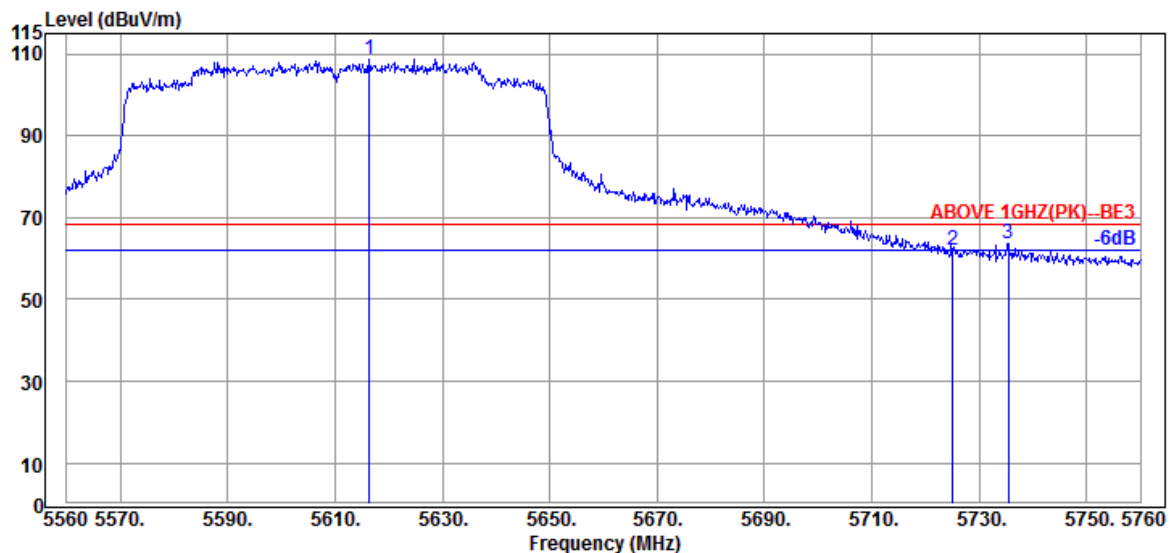

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5616.400	34.40	9.33	34.28	99.25	108.70	---	---	Peak
	5725.000	34.67	9.42	34.32	52.17	61.94	68.20	6.26	Peak
	5735.400	34.67	9.43	34.33	53.94	63.71	68.20	4.49	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

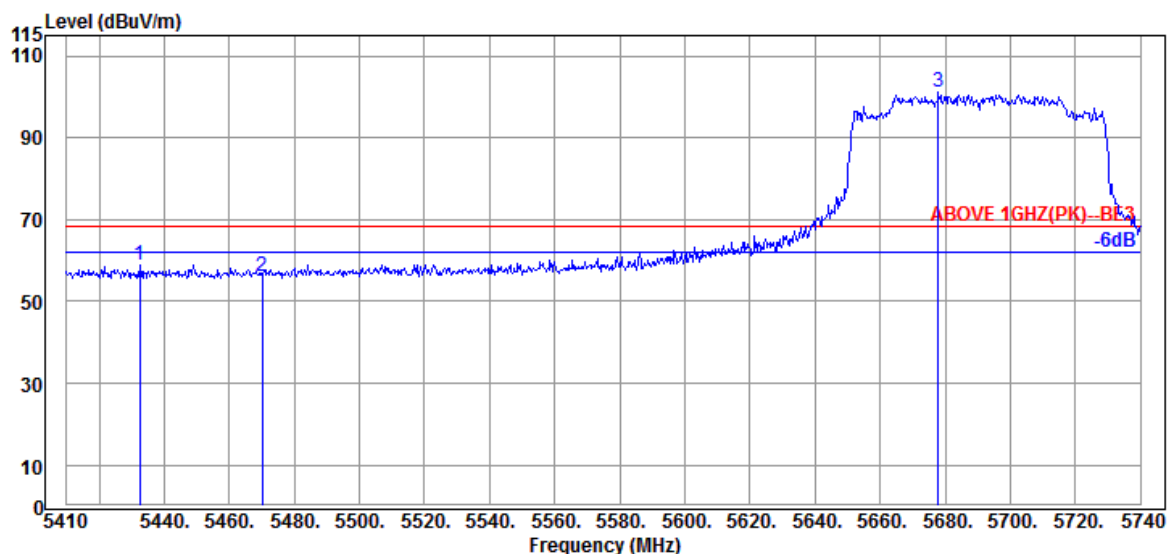

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.440	34.55	9.17	34.25	49.57	59.04	68.20	9.16	Peak
5470.060	34.47	9.20	34.24	46.63	56.06	68.20	12.14	Peak
@ 5677.960	34.40	9.37	34.30	91.59	101.06	---	---	Peak

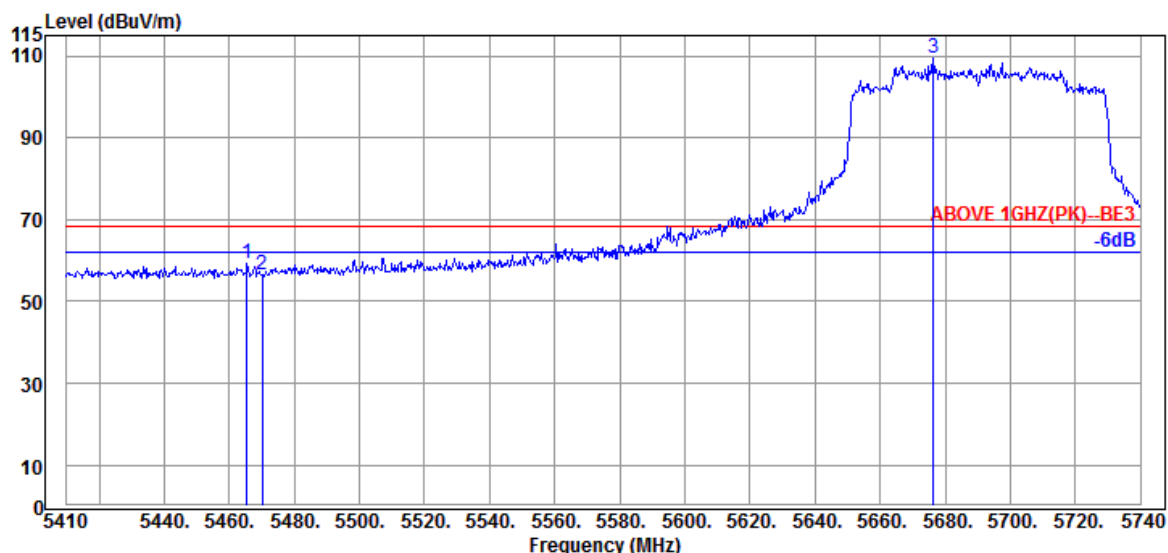

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.440	34.47	9.20	34.24	49.97	59.40	68.20	8.80	Peak
5470.060	34.47	9.20	34.24	47.15	56.58	68.20	11.62	Peak
@ 5676.310	34.40	9.37	34.30	99.83	109.30	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

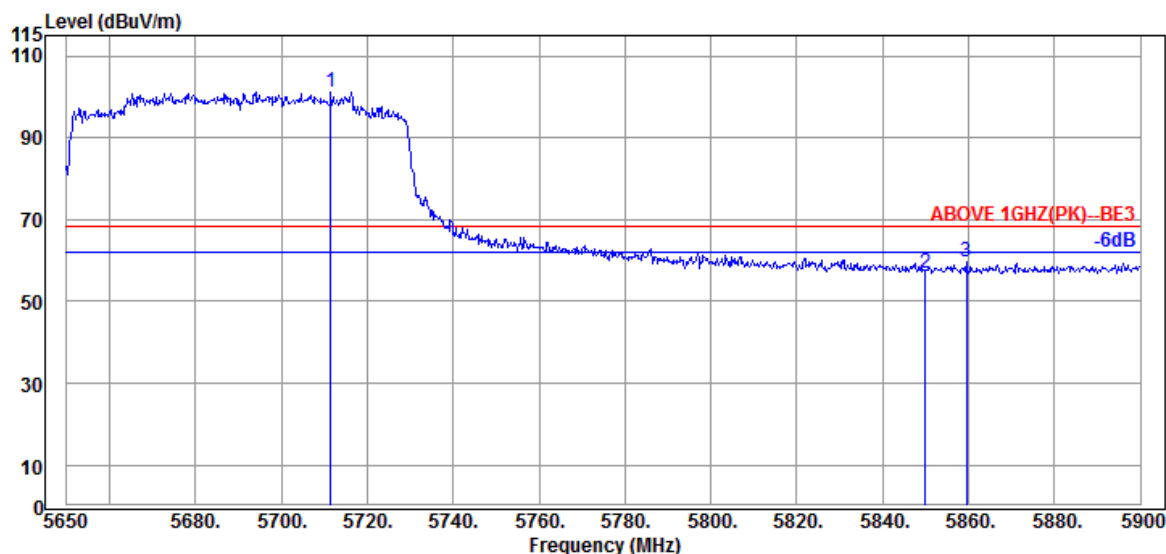

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5711.500	34.53	9.40	34.32	91.46	101.07	---	---	Peak
	5850.000	35.10	9.52	34.38	46.69	56.93	68.20	11.27	Peak
	5859.500	35.20	9.53	34.39	49.48	59.82	68.20	8.38	Peak

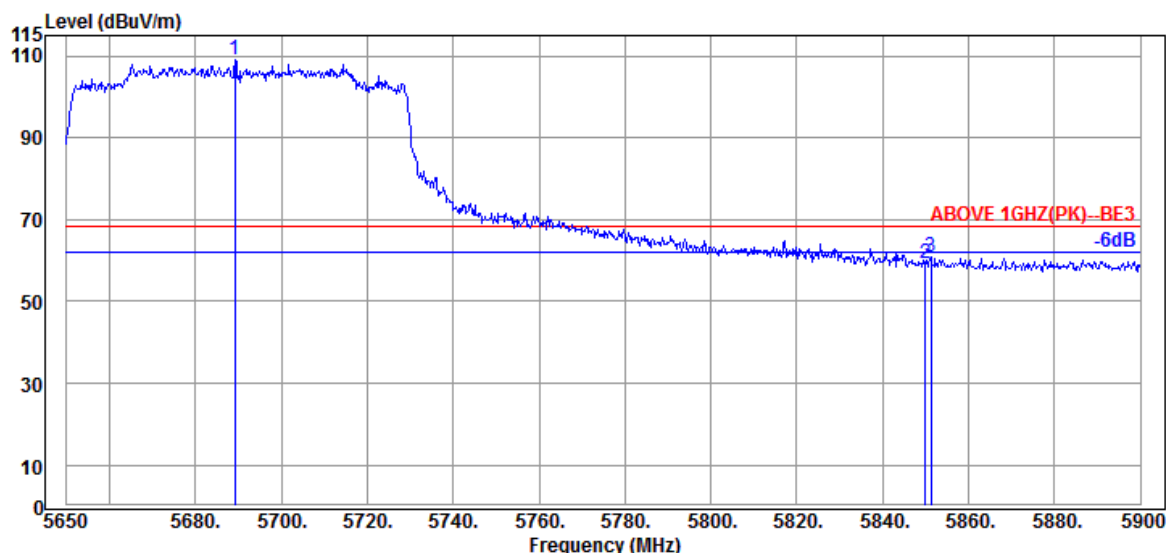

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5689.250	34.40	9.39	34.31	99.40	108.88	---	---	Peak
	5850.000	35.10	9.52	34.38	49.03	59.27	68.20	8.93	Peak
	5851.250	35.10	9.52	34.38	50.62	60.86	68.20	7.34	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

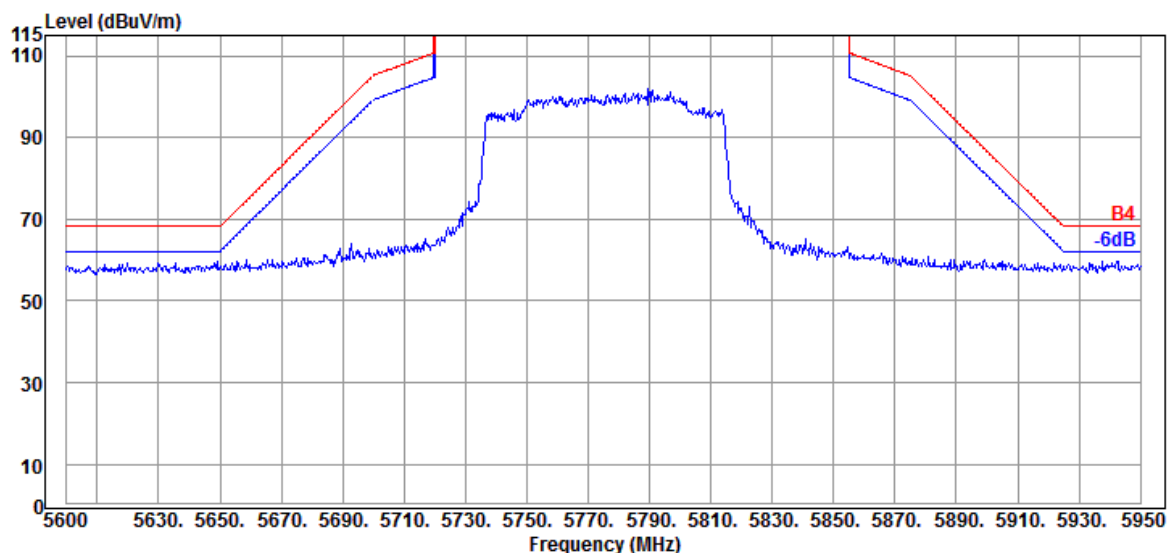

Antenna at Vertical Polarization

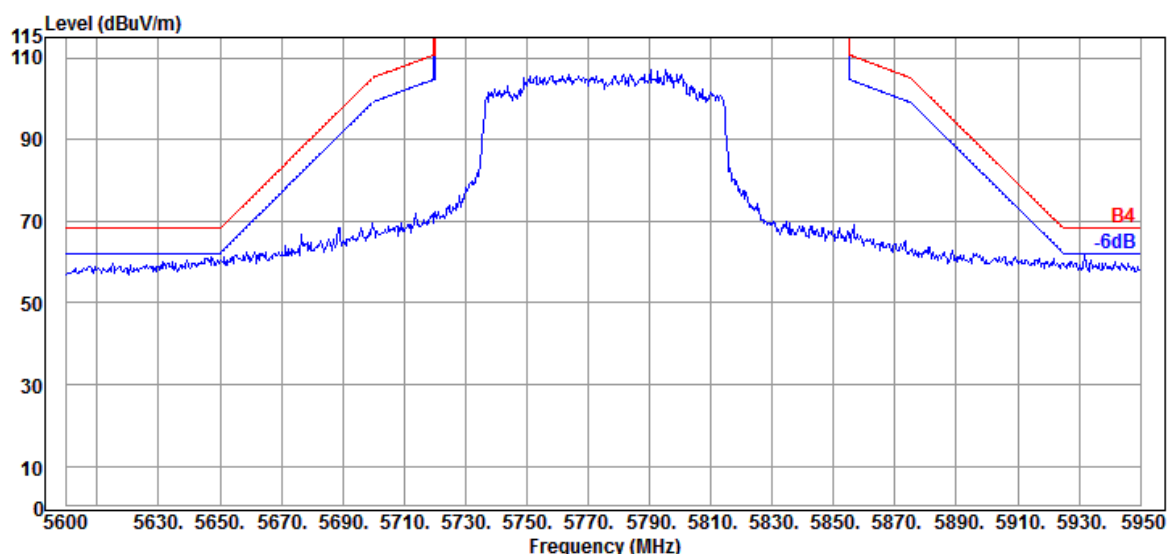

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

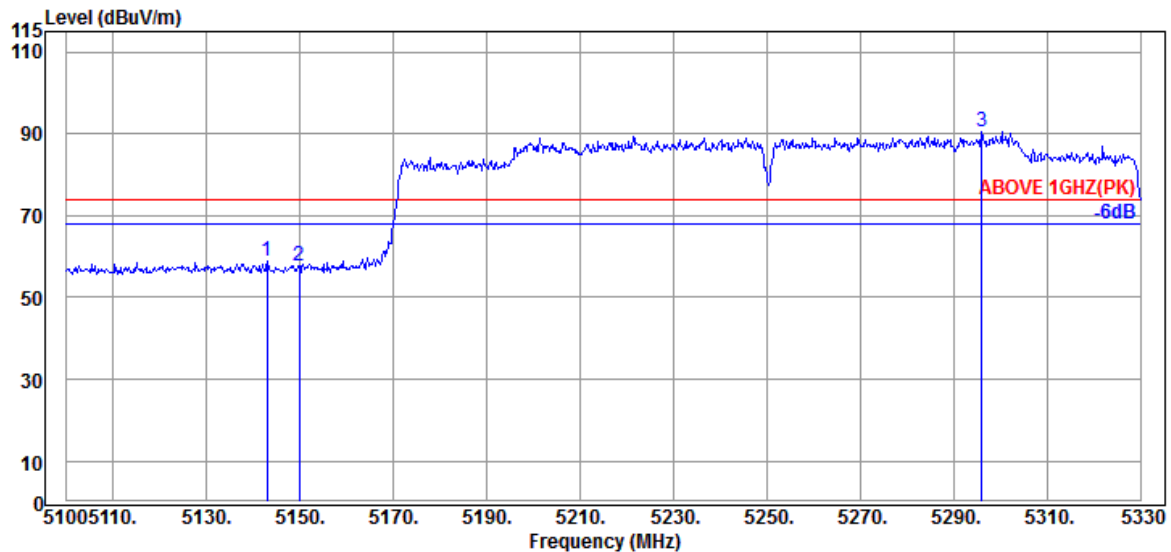

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.010	34.20	8.92	34.36	50.10	58.86	74.00	15.14	Peak
5149.910	34.20	8.92	34.35	48.83	57.60	74.00	16.40	Peak
@ 5295.960	34.50	9.05	34.30	81.27	90.52	---	---	Peak

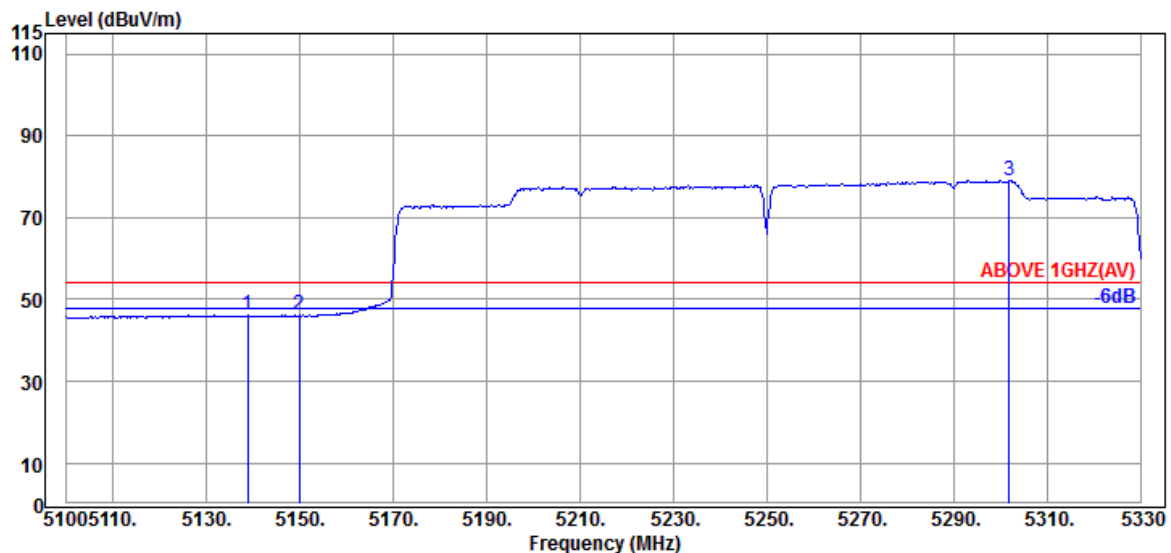

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.870	34.17	8.91	34.36	37.41	46.13	54.00	7.87	Average
5149.910	34.20	8.92	34.35	37.38	46.15	54.00	7.85	Average
@ 5301.940	34.50	9.05	34.29	69.83	79.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

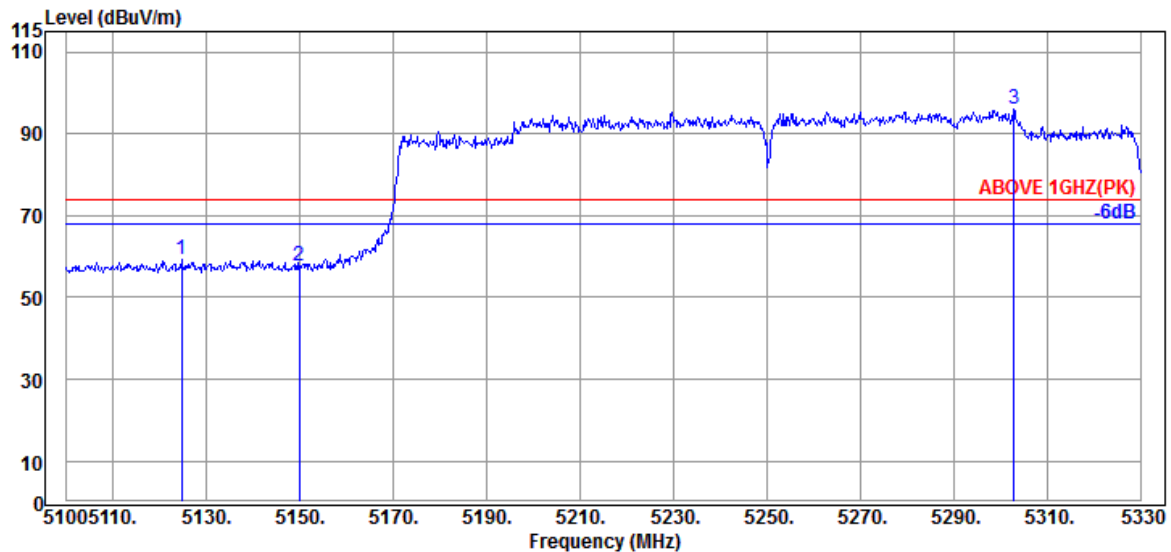

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.610	34.13	8.91	34.36	50.57	59.25	74.00	14.75	Peak
5149.910	34.20	8.92	34.35	48.96	57.73	74.00	16.27	Peak
@ 5302.860	34.50	9.05	34.29	86.79	96.05	---	---	Peak

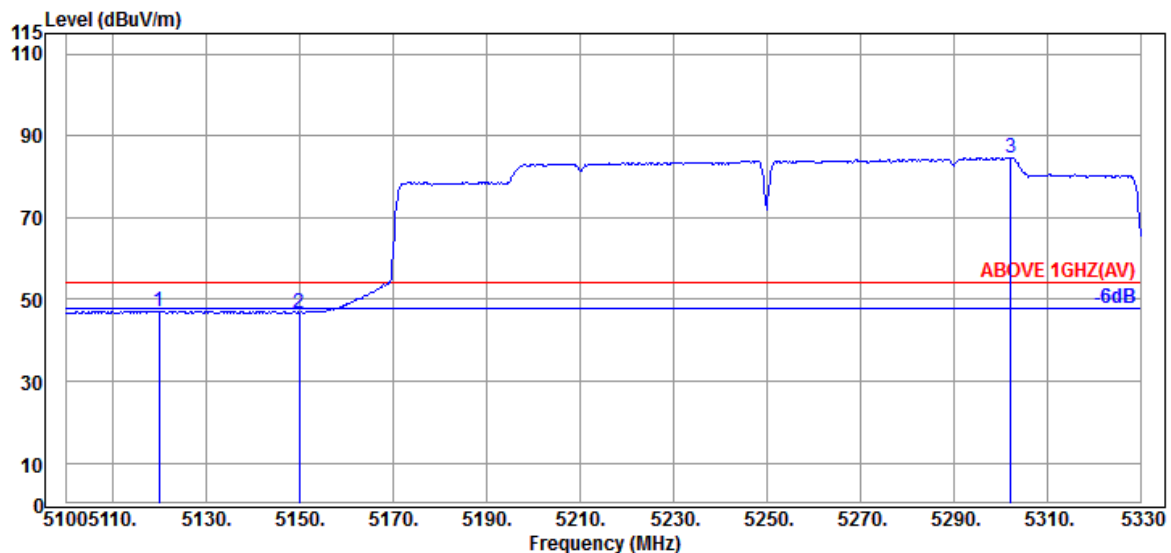

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.780	34.13	8.89	34.36	38.52	47.18	54.00	6.82	Average
5149.910	34.20	8.92	34.35	37.99	46.76	54.00	7.24	Average
@ 5302.170	34.50	9.05	34.29	75.43	84.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

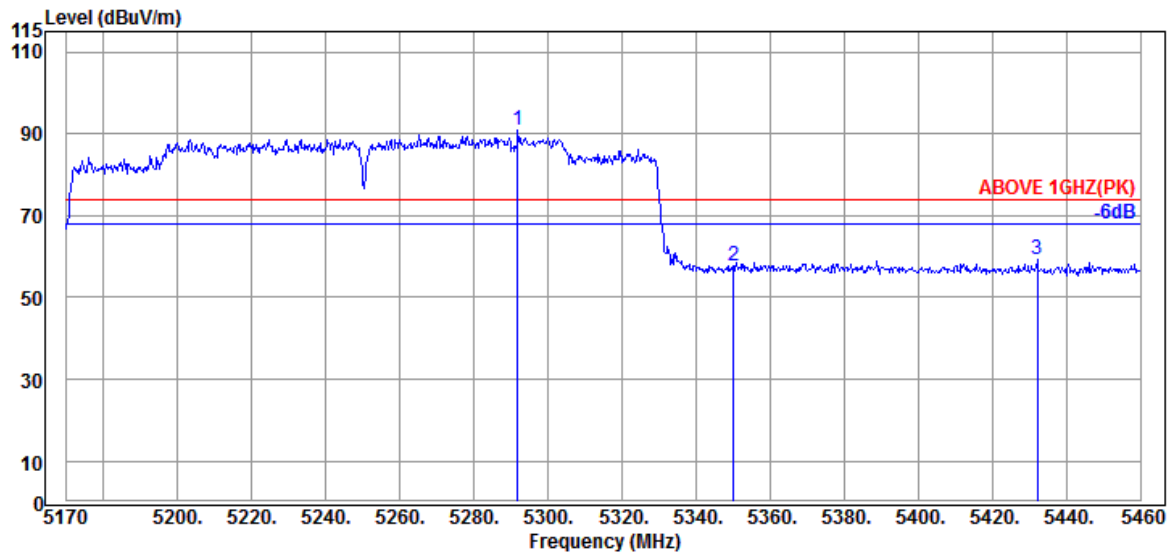

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.800	34.47	9.04	34.30	81.59	90.80	---	---	Peak
5350.090	34.60	9.10	34.27	48.36	57.79	74.00	16.21	Peak
5432.160	34.55	9.17	34.25	49.95	59.42	74.00	14.58	Peak

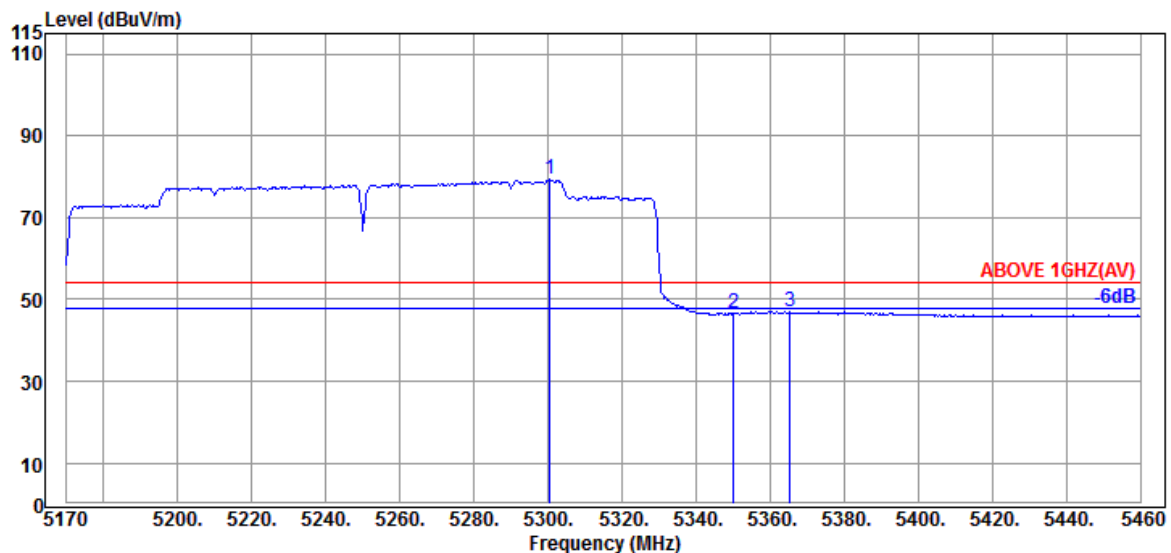

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.500	34.50	9.05	34.29	70.00	79.26	---	---	Average
5350.090	34.60	9.10	34.27	37.01	46.44	54.00	7.56	Average
5365.460	34.63	9.11	34.27	37.51	46.98	54.00	7.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

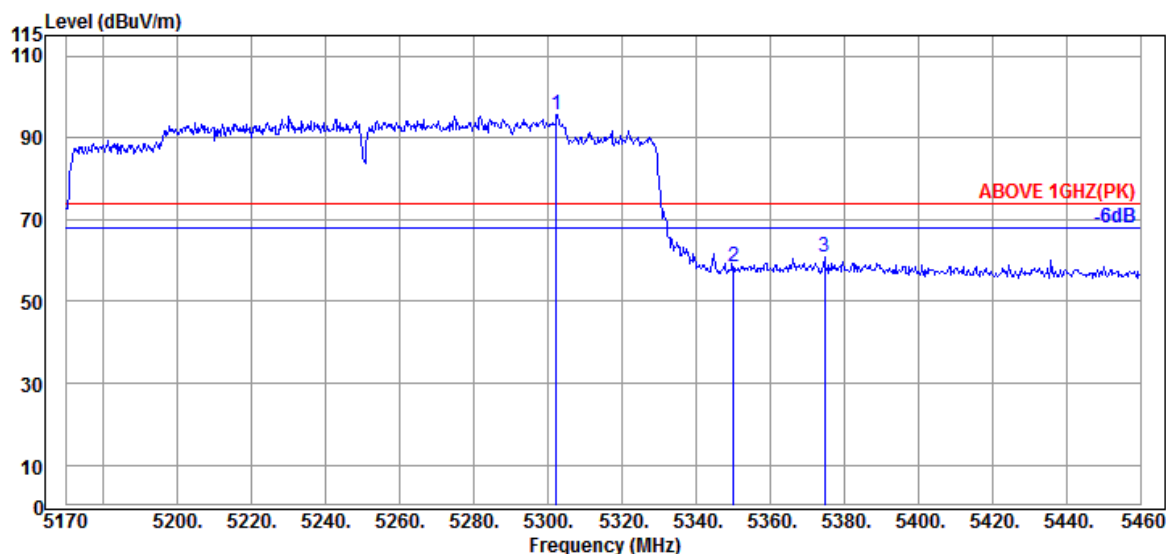

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	34.50	9.05	34.29	86.57	95.83	---	---	Peak
5350.090	34.60	9.10	34.27	49.19	58.62	74.00	15.38	Peak
5374.740	34.67	9.11	34.27	51.17	60.68	74.00	13.32	Peak

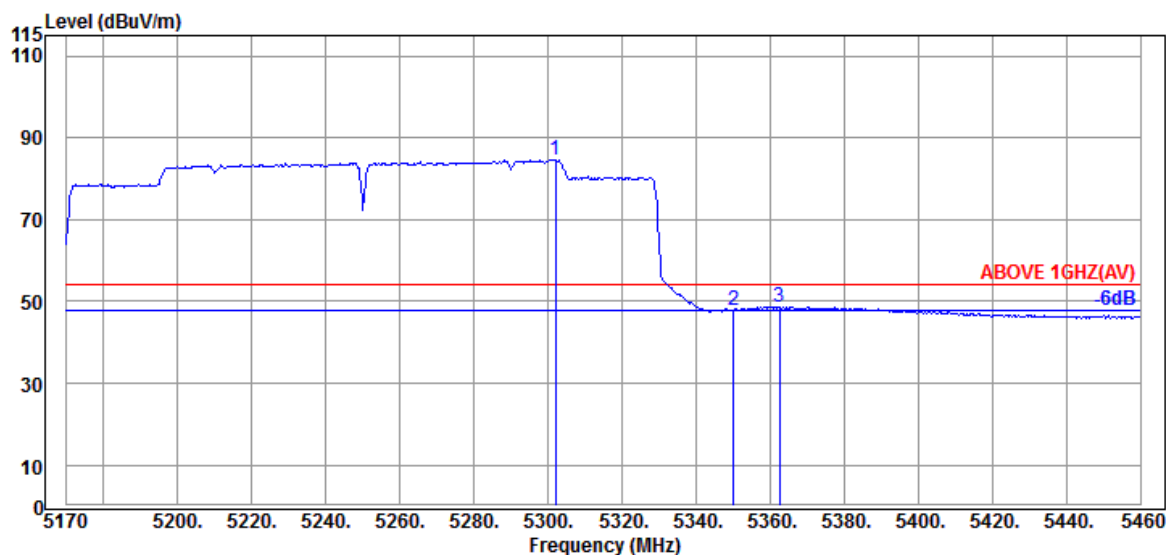

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.950	34.50	9.05	34.29	75.45	84.71	---	---	Average
5350.090	34.60	9.10	34.27	38.22	47.65	54.00	6.35	Average
5362.560	34.63	9.11	34.27	39.31	48.78	54.00	5.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

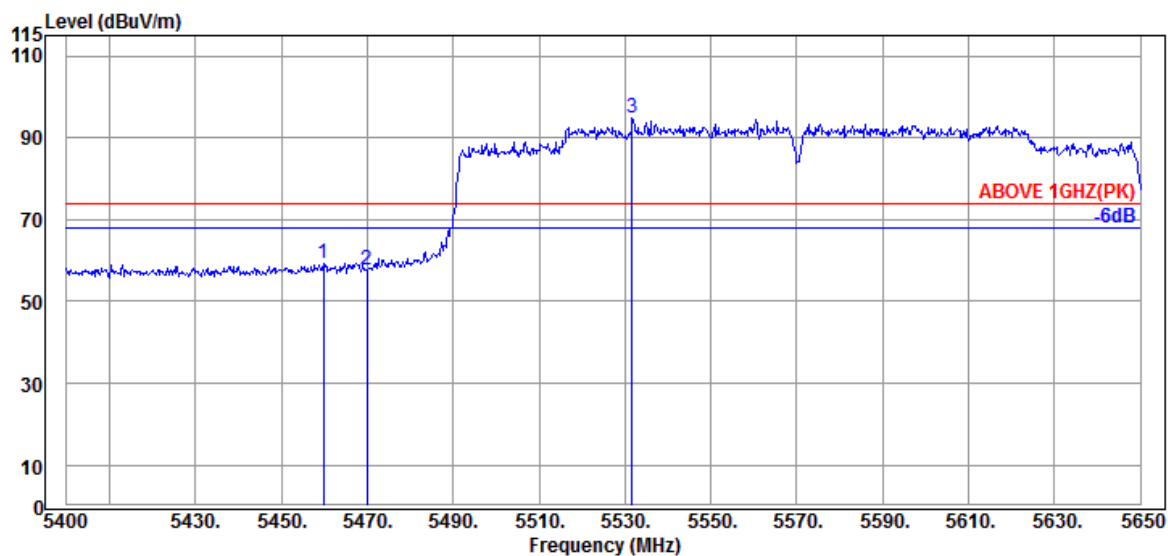

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.750	34.50	9.18	34.24	49.81	59.25	74.00	14.75	Peak
5470.000	34.47	9.20	34.24	48.17	57.60	74.00	16.40	Peak
@ 5531.750	34.33	9.26	34.25	85.52	94.86	---	---	Peak

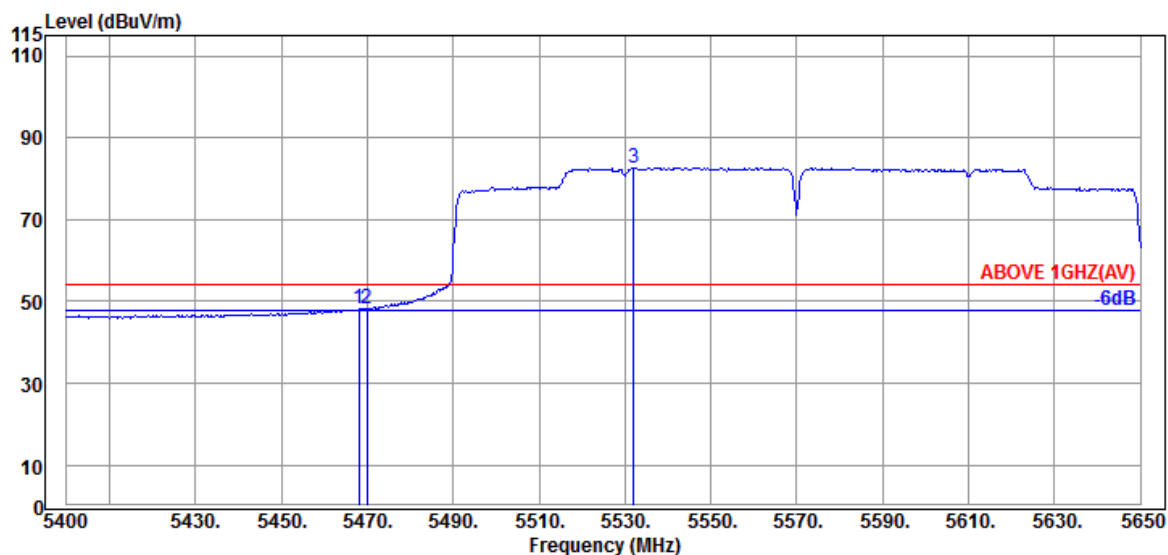

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.47	9.20	34.24	38.85	48.28	54.00	5.72	Average
5470.000	34.47	9.20	34.24	38.81	48.24	54.00	5.76	Average
@ 5532.000	34.33	9.26	34.25	73.44	82.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

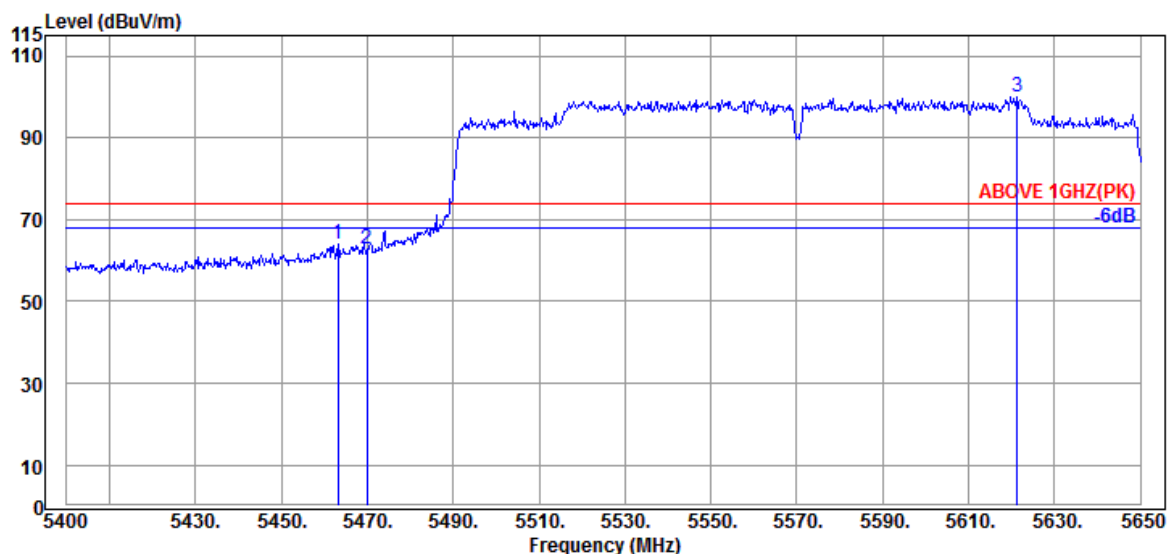

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.250	34.50	9.20	34.24	54.44	63.90	74.00	10.10	Peak
5470.000	34.47	9.20	34.24	53.26	62.69	74.00	11.31	Peak
@ 5621.250	34.40	9.33	34.28	90.68	100.13	---	---	Peak

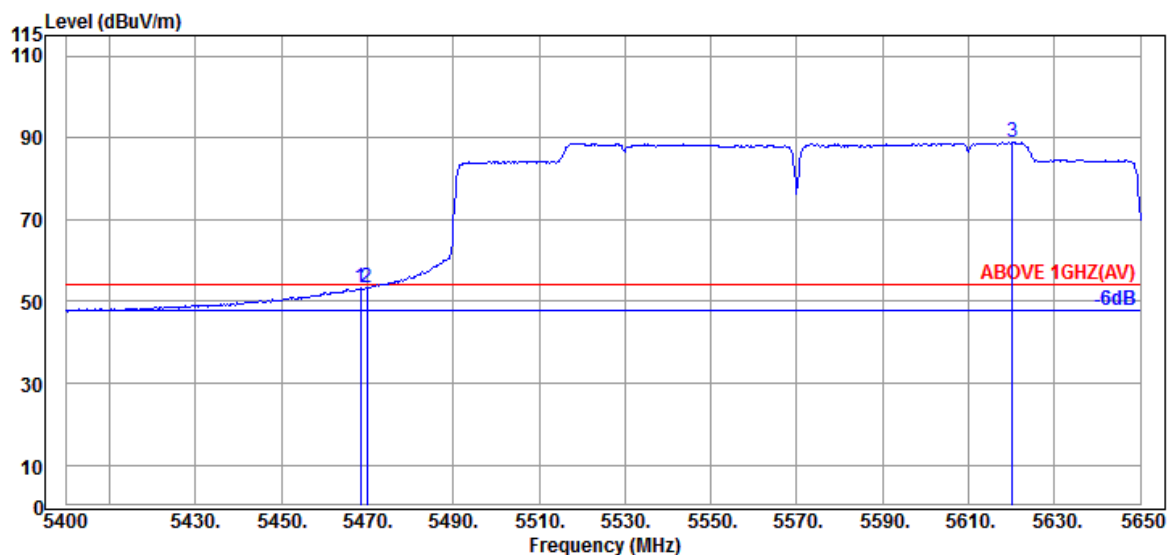

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.47	9.20	34.24	43.76	53.19	54.00	0.81	Average
5470.000	34.47	9.20	34.24	43.95	53.38	54.00	0.62	Average
@ 5620.250	34.40	9.33	34.28	79.48	88.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

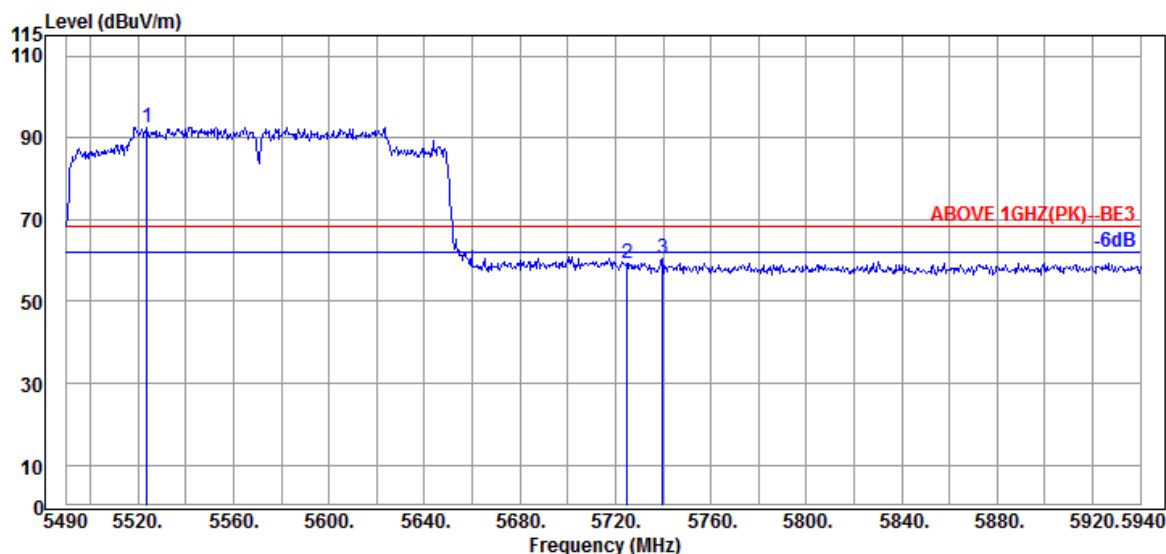

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5523.750	34.37	9.24	34.24	83.24	92.61	---	---	Peak
	5724.900	34.67	9.42	34.32	49.53	59.30	68.20	8.90	Peak
	5739.750	34.80	9.43	34.33	50.43	60.33	68.20	7.87	Peak

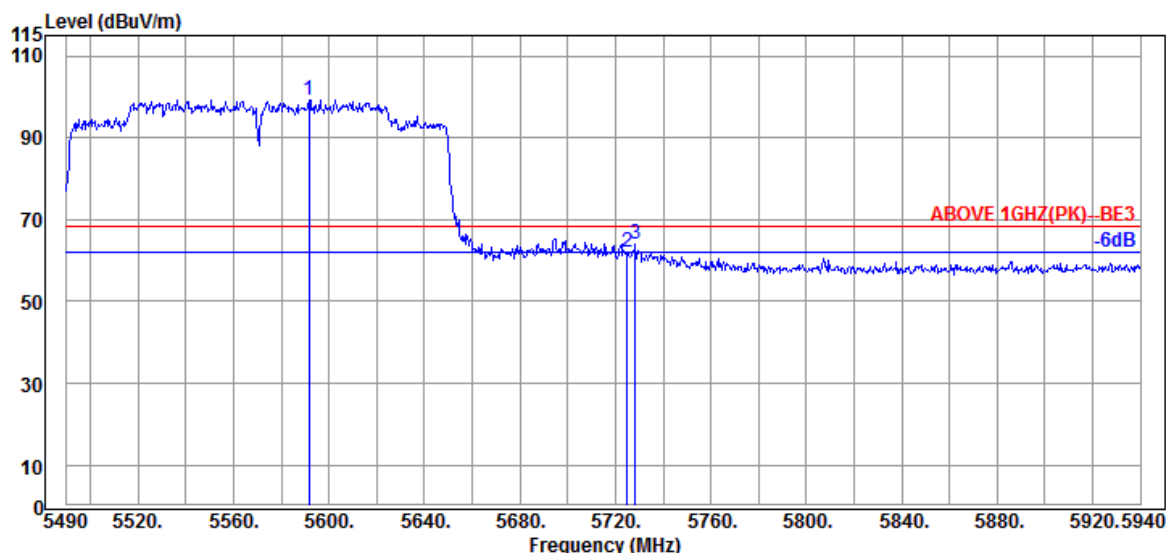

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5591.700	34.40	9.30	34.27	89.93	99.36	---	---	Peak
	5724.900	34.67	9.42	34.32	52.23	62.00	68.20	6.20	Peak
	5728.500	34.67	9.42	34.32	54.07	63.84	68.20	4.36	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

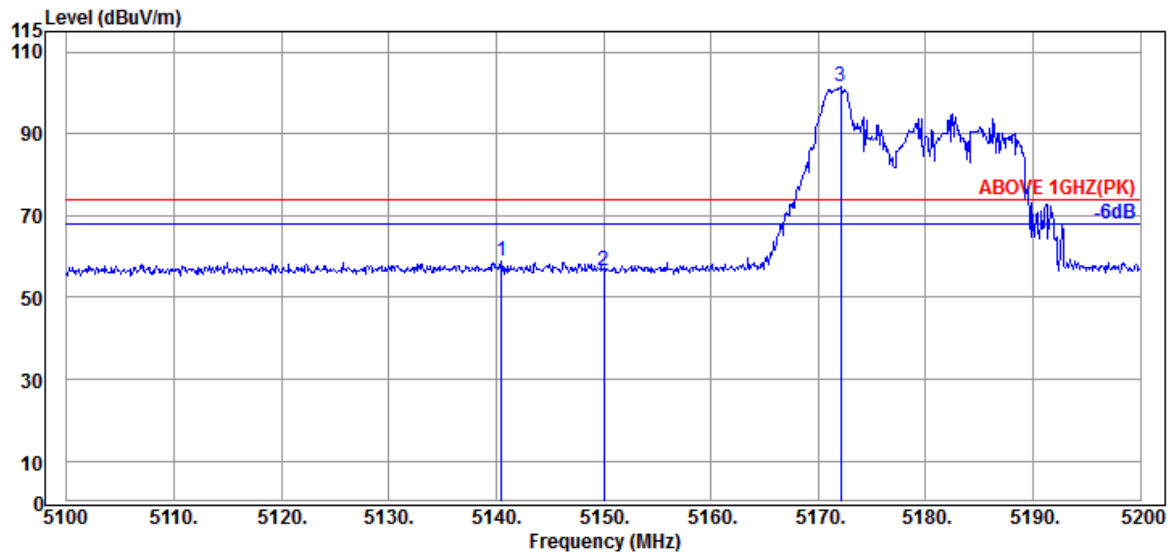

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.500	34.17	8.92	34.36	50.06	58.79	74.00	15.21	Peak
5150.000	34.20	8.92	34.35	47.70	56.47	74.00	17.53	Peak
@ 5172.100	34.20	8.94	34.34	92.76	101.56	---	---	Peak

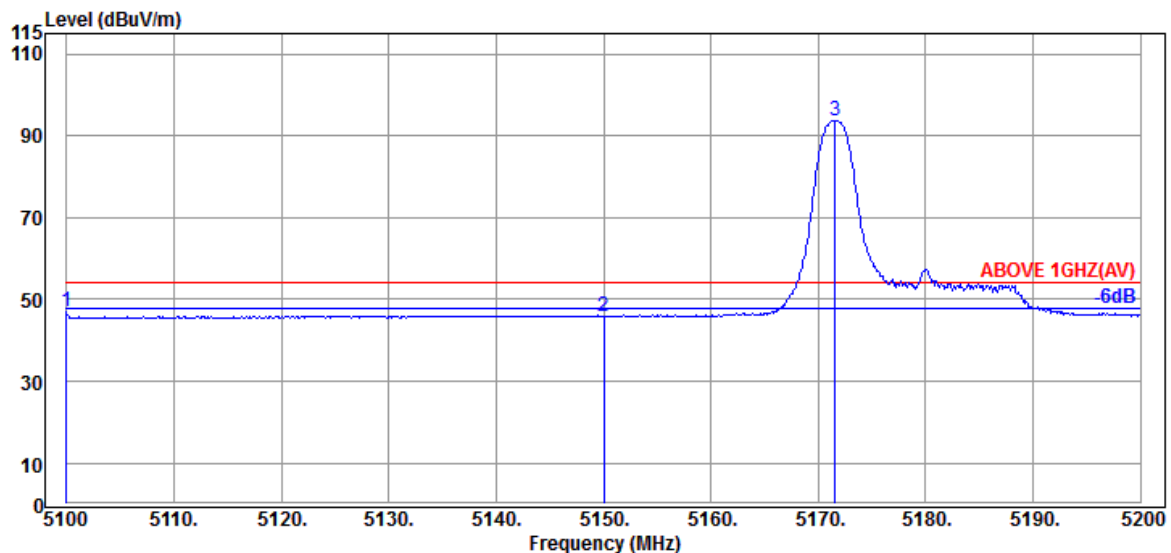

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.000	34.10	8.88	34.36	38.53	47.15	54.00	6.85	Average
5150.000	34.20	8.92	34.35	37.11	45.88	54.00	8.12	Average
@ 5171.600	34.20	8.94	34.34	85.02	93.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

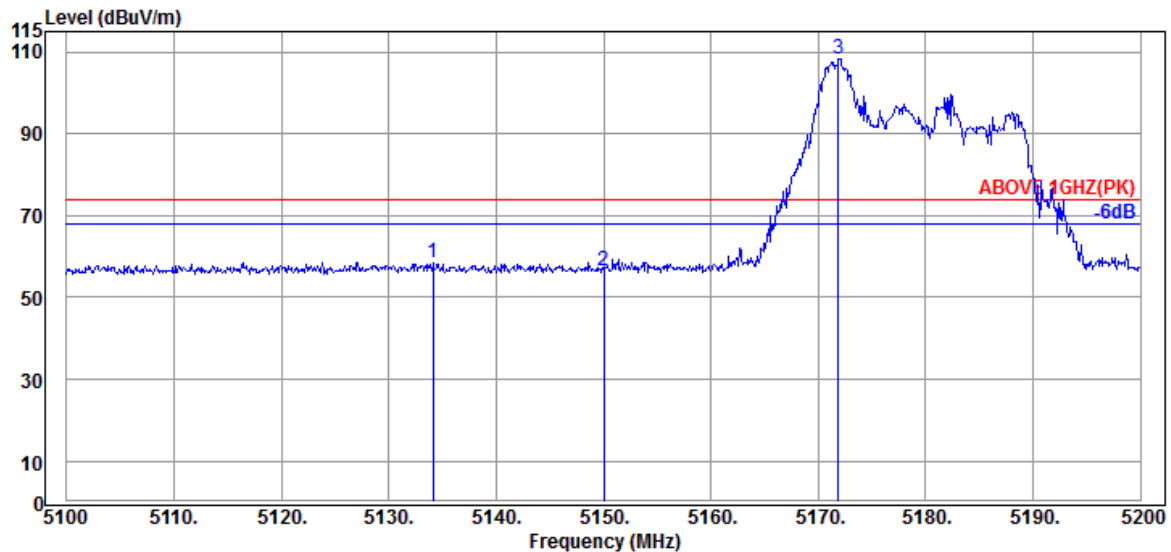

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.100	34.17	8.91	34.36	49.96	58.68	74.00	15.32	Peak
5150.000	34.20	8.92	34.35	47.79	56.56	74.00	17.44	Peak
@ 5171.900	34.20	8.94	34.34	99.49	108.29	---	---	Peak

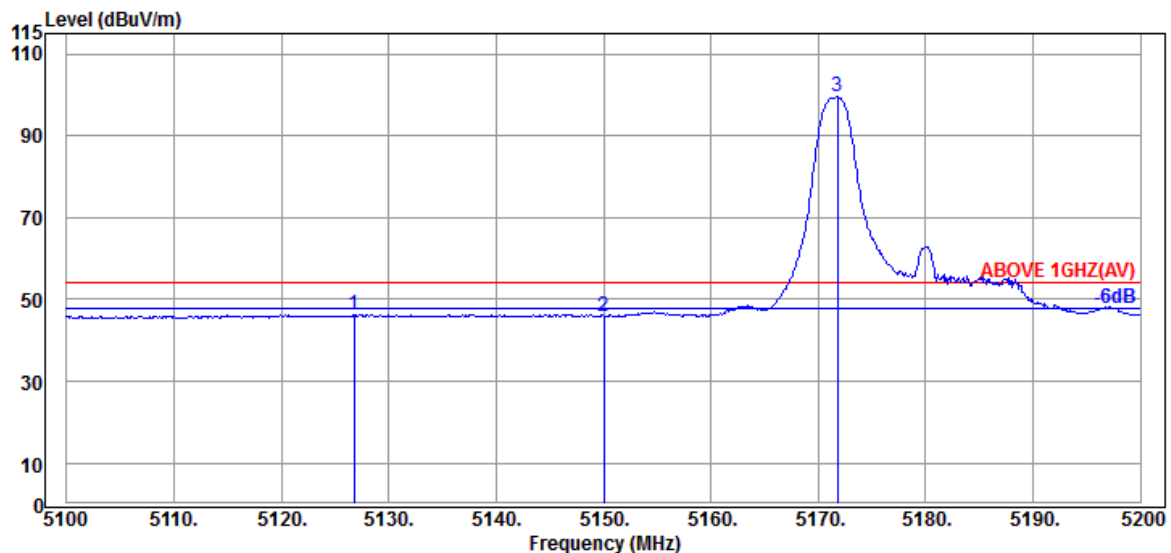

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.800	34.13	8.91	34.36	37.67	46.35	54.00	7.65	Average
5150.000	34.20	8.92	34.35	37.12	45.89	54.00	8.11	Average
@ 5171.800	34.20	8.94	34.34	90.70	99.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

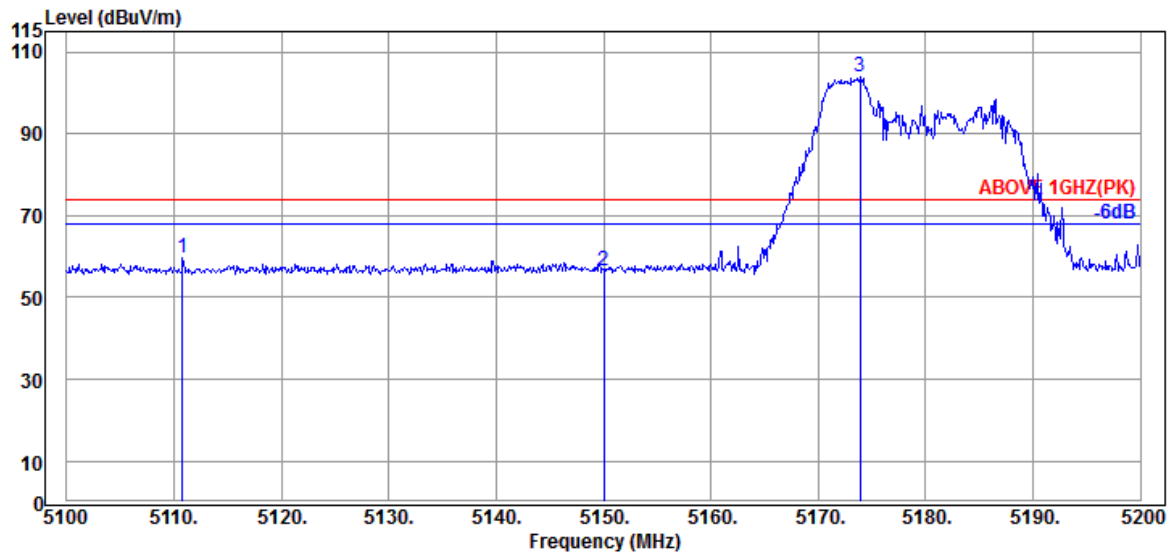

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.800	34.10	8.89	34.36	50.90	59.53	74.00	14.47	Peak
5150.000	34.20	8.92	34.35	47.81	56.58	74.00	17.42	Peak
@ 5173.900	34.20	8.95	34.34	94.95	103.76	---	---	Peak

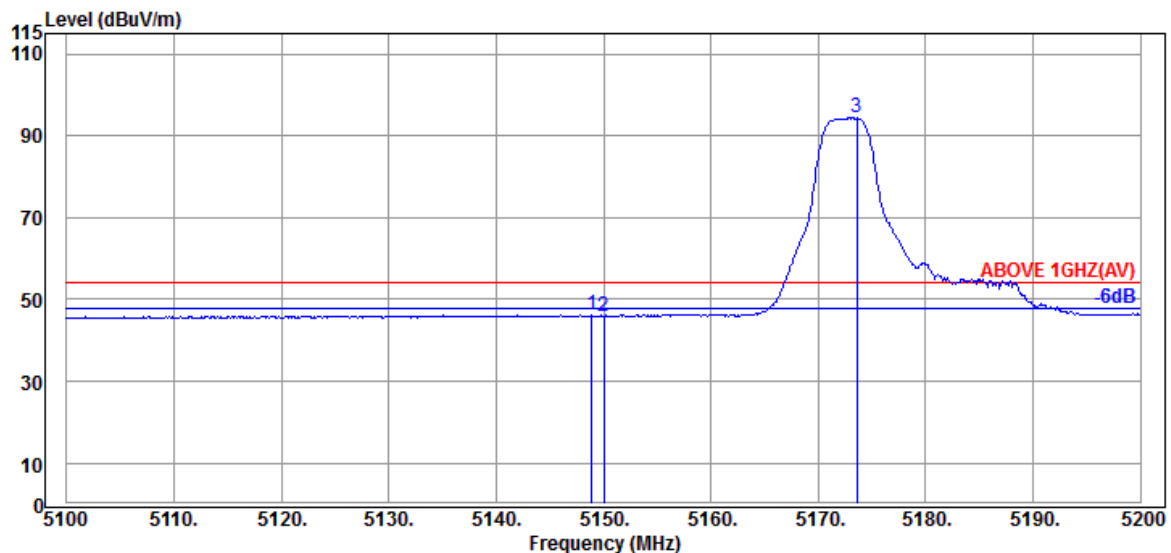

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.20	8.92	34.35	37.43	46.20	54.00	7.80	Average
5150.000	34.20	8.92	34.35	37.18	45.95	54.00	8.05	Average
@ 5173.600	34.20	8.95	34.34	85.49	94.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

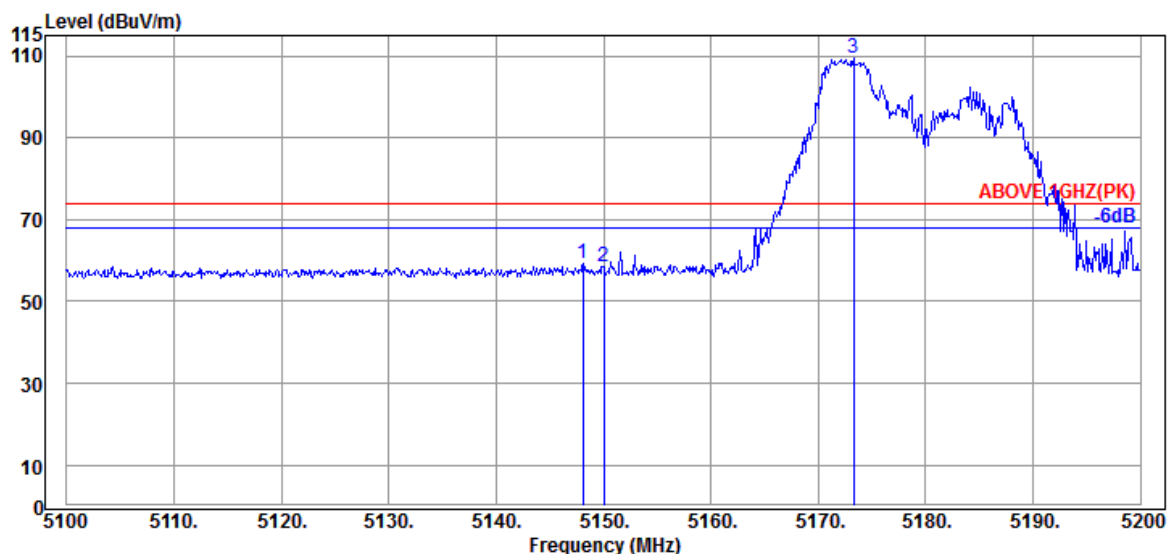

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.20	8.92	34.35	50.67	59.44	74.00	14.56	Peak
5150.000	34.20	8.92	34.35	49.55	58.32	74.00	15.68	Peak
@ 5173.300	34.20	8.94	34.34	100.72	109.52	---	---	Peak

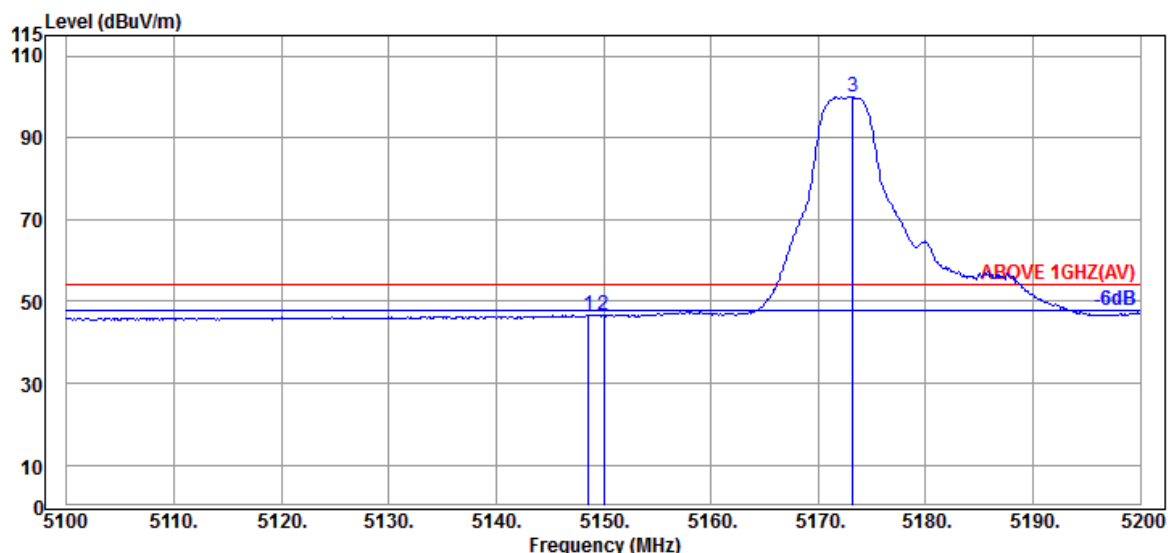

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.20	8.92	34.35	37.90	46.67	54.00	7.33	Average
5150.000	34.20	8.92	34.35	37.75	46.52	54.00	7.48	Average
@ 5173.200	34.20	8.94	34.34	91.18	99.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

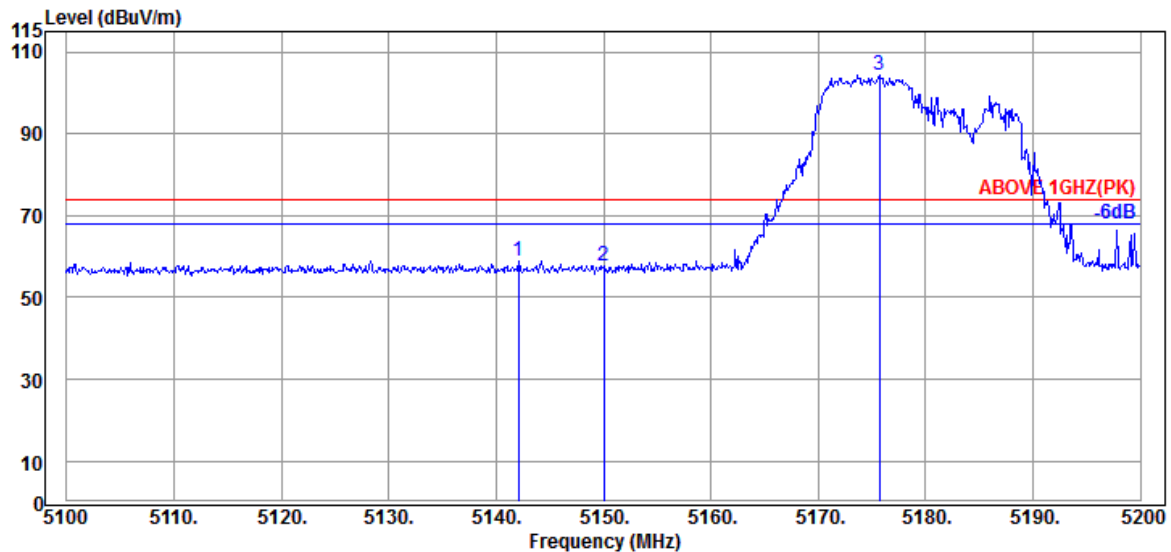

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5142.100	34.20	8.92	34.36	50.26	59.02	74.00	14.98	Peak
5150.000	34.20	8.92	34.35	49.05	57.82	74.00	16.18	Peak
@ 5175.700	34.20	8.95	34.34	95.34	104.15	---	---	Peak

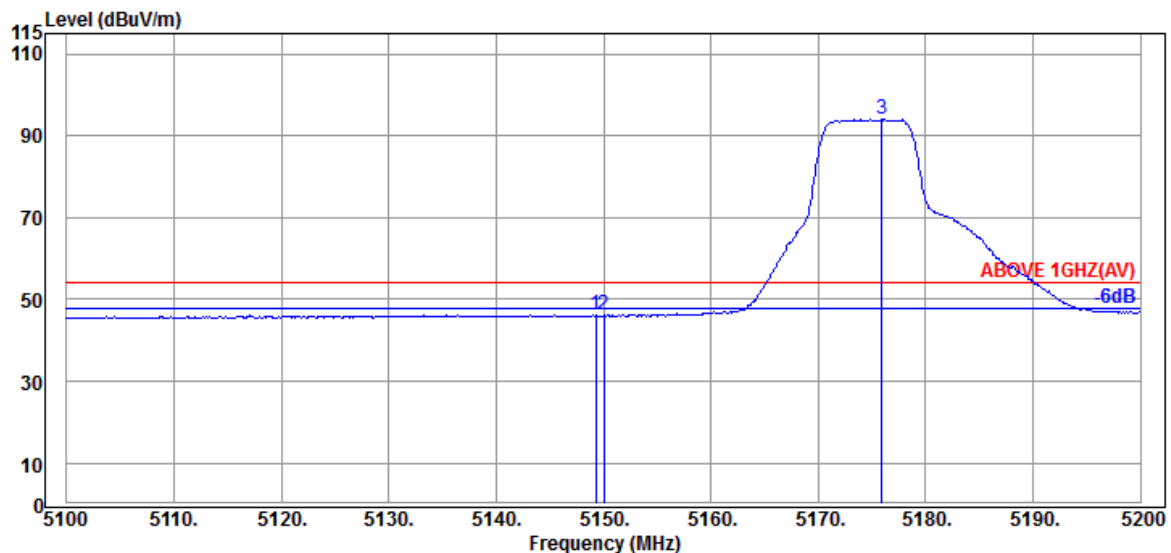

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.300	34.20	8.92	34.35	37.38	46.15	54.00	7.85	Average
5150.000	34.20	8.92	34.35	37.32	46.09	54.00	7.91	Average
@ 5175.900	34.20	8.95	34.34	85.26	94.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

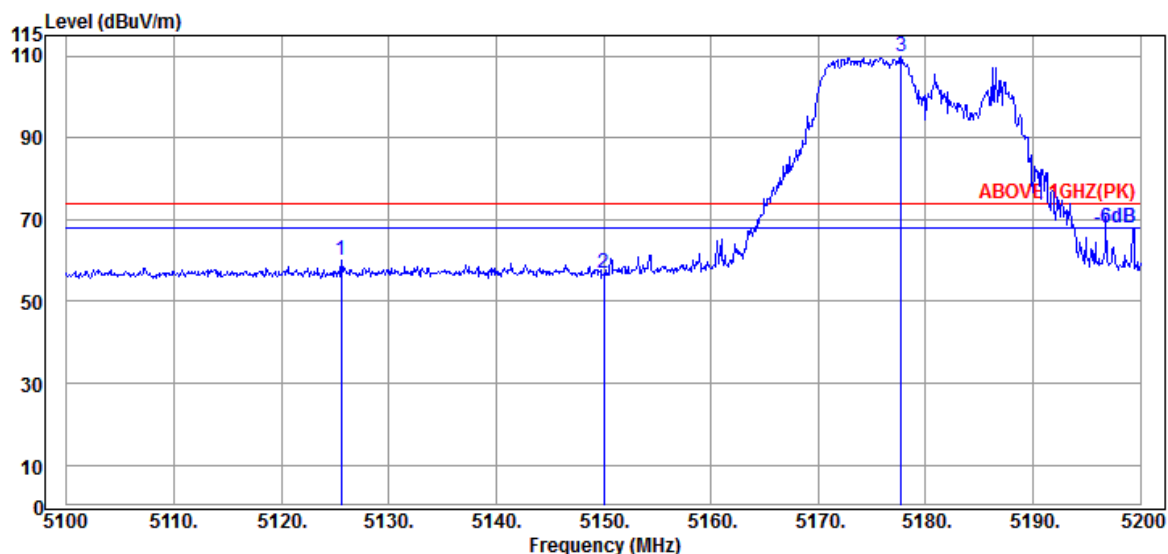

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5125.600	34.13	8.91	34.36	51.30	59.98	74.00	14.02	Peak
5150.000	34.20	8.92	34.35	48.11	56.88	74.00	17.12	Peak
@ 5177.700	34.20	8.95	34.34	100.88	109.69	---	---	Peak

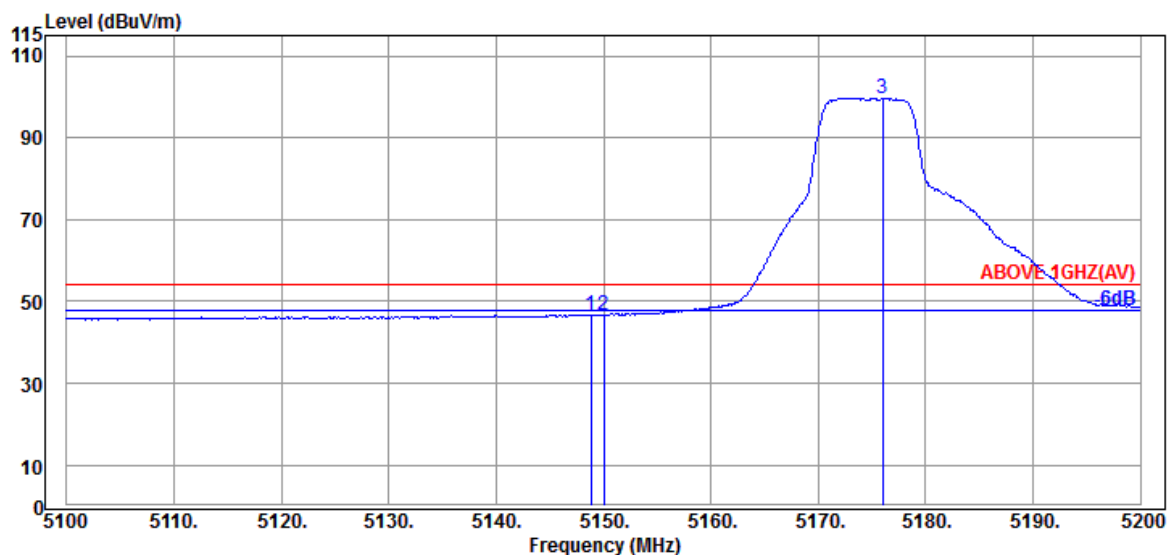

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.800	34.20	8.92	34.35	38.03	46.80	54.00	7.20	Average
5150.000	34.20	8.92	34.35	37.74	46.51	54.00	7.49	Average
@ 5176.000	34.20	8.95	34.34	90.94	99.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

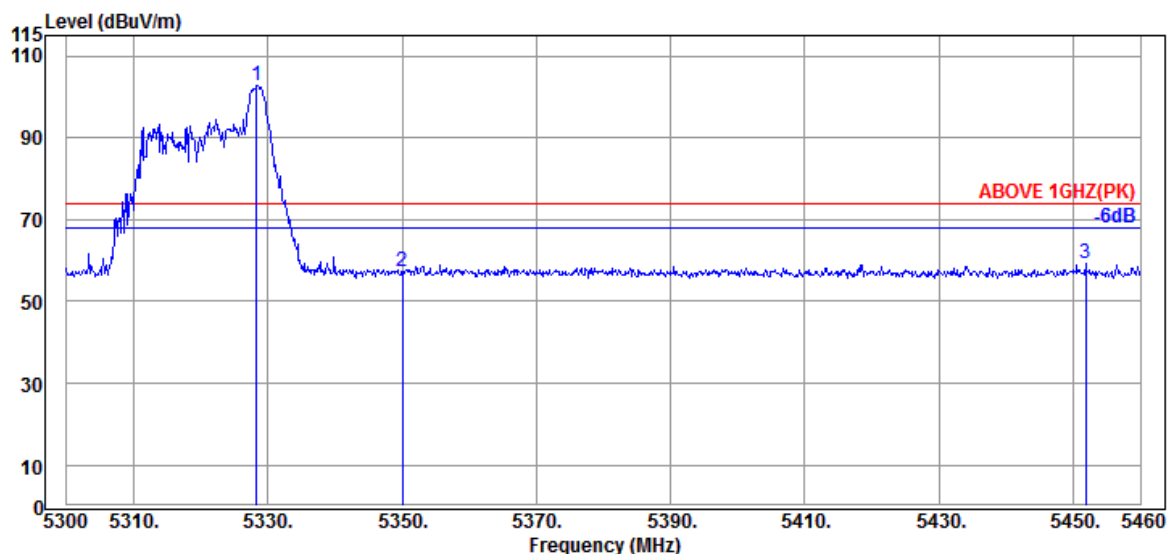

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.57	9.08	34.28	93.47	102.84	---	---	Peak
5350.080	34.60	9.10	34.27	47.96	57.39	74.00	16.61	Peak
5451.840	34.50	9.18	34.24	49.84	59.28	74.00	14.72	Peak

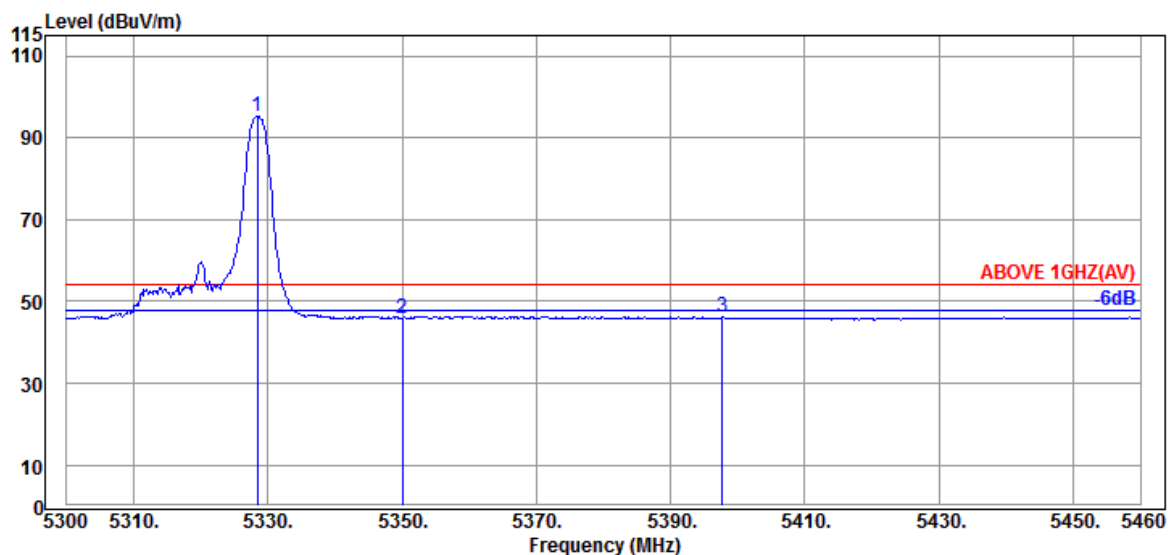

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	9.08	34.28	85.89	95.26	---	---	Average
5350.080	34.60	9.10	34.27	36.53	45.96	54.00	8.04	Average
5397.760	34.70	9.14	34.27	36.70	46.27	54.00	7.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

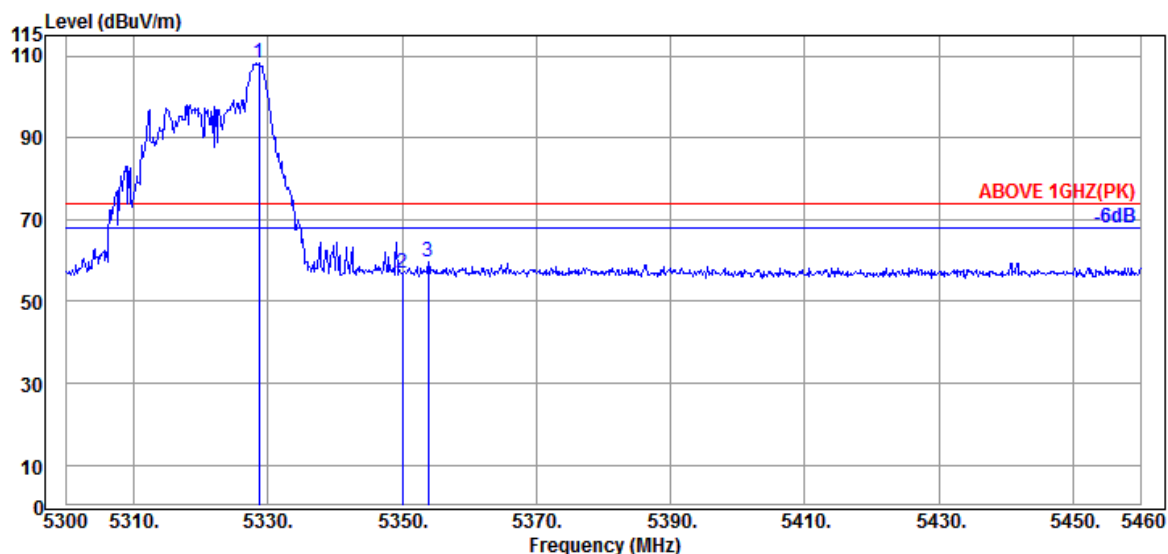

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.57	9.08	34.28	99.08	108.45	---	---	Peak
5350.080	34.60	9.10	34.27	47.57	57.00	74.00	17.00	Peak
5353.920	34.60	9.10	34.27	50.39	59.82	74.00	14.18	Peak

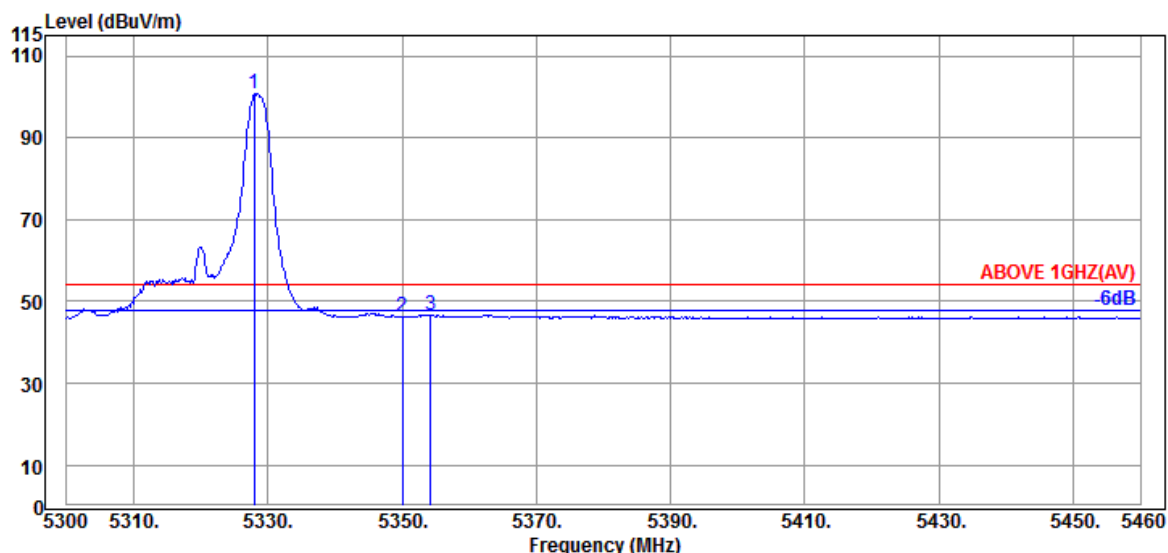

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.57	9.08	34.28	91.28	100.65	---	---	Average
5350.080	34.60	9.10	34.27	36.70	46.13	54.00	7.87	Average
5354.240	34.63	9.10	34.27	37.23	46.69	54.00	7.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

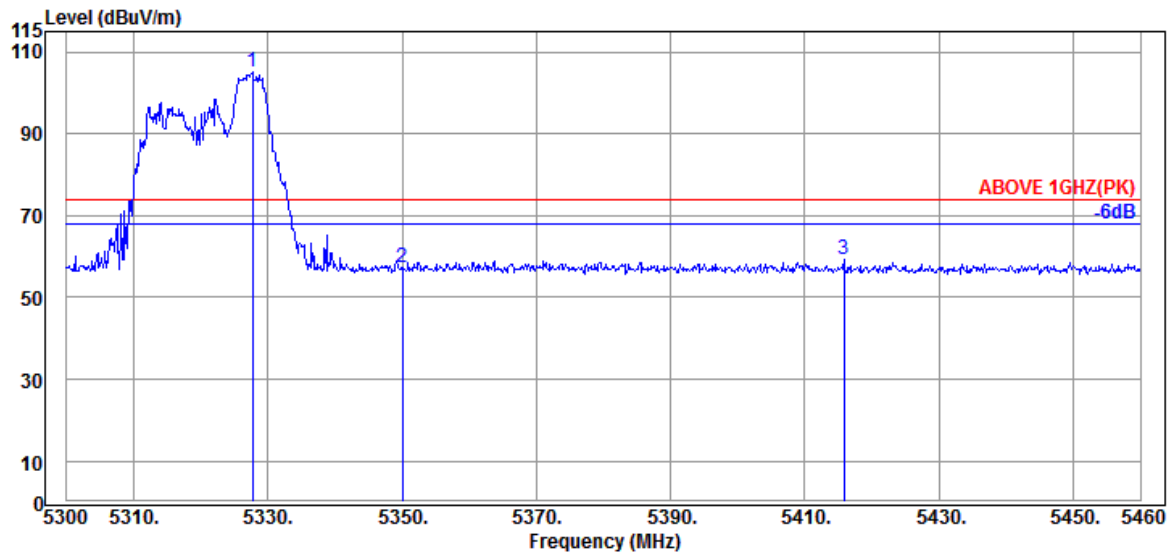

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.680	34.57	9.08	34.28	95.56	104.93	---	---	Peak
5350.080	34.60	9.10	34.27	47.83	57.26	74.00	16.74	Peak
5415.840	34.65	9.15	34.26	49.61	59.15	74.00	14.85	Peak

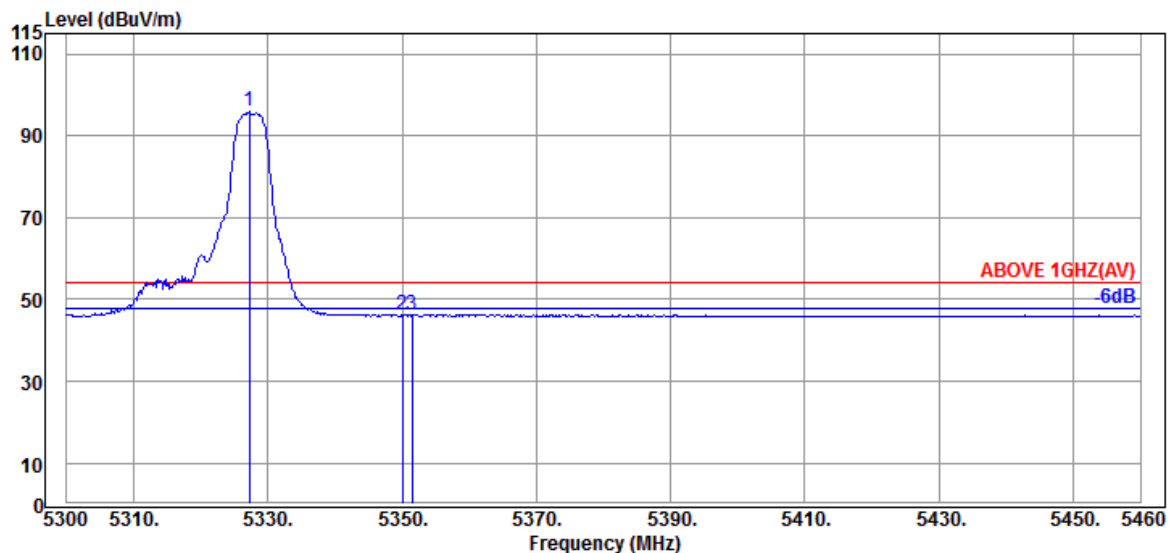

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	34.57	9.08	34.28	86.49	95.86	---	---	Average
5350.080	34.60	9.10	34.27	36.81	46.24	54.00	7.76	Average
5351.520	34.60	9.10	34.27	36.89	46.32	54.00	7.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

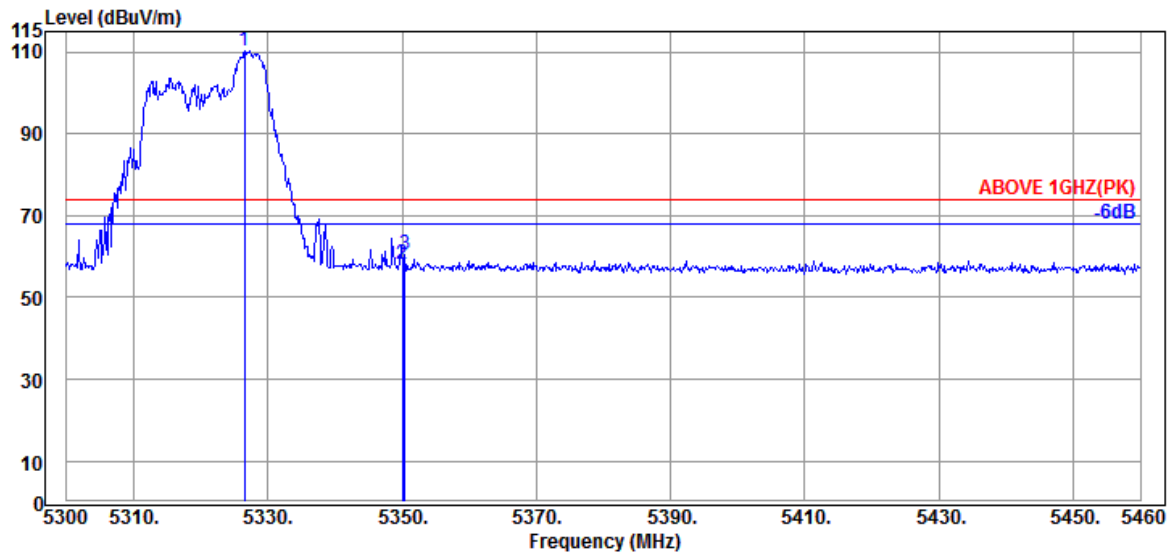

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.560	34.57	9.08	34.28	100.90	110.27	---	---	Peak
5350.080	34.60	9.10	34.27	48.69	58.12	74.00	15.88	Peak
5350.400	34.60	9.10	34.27	50.95	60.38	74.00	13.62	Peak

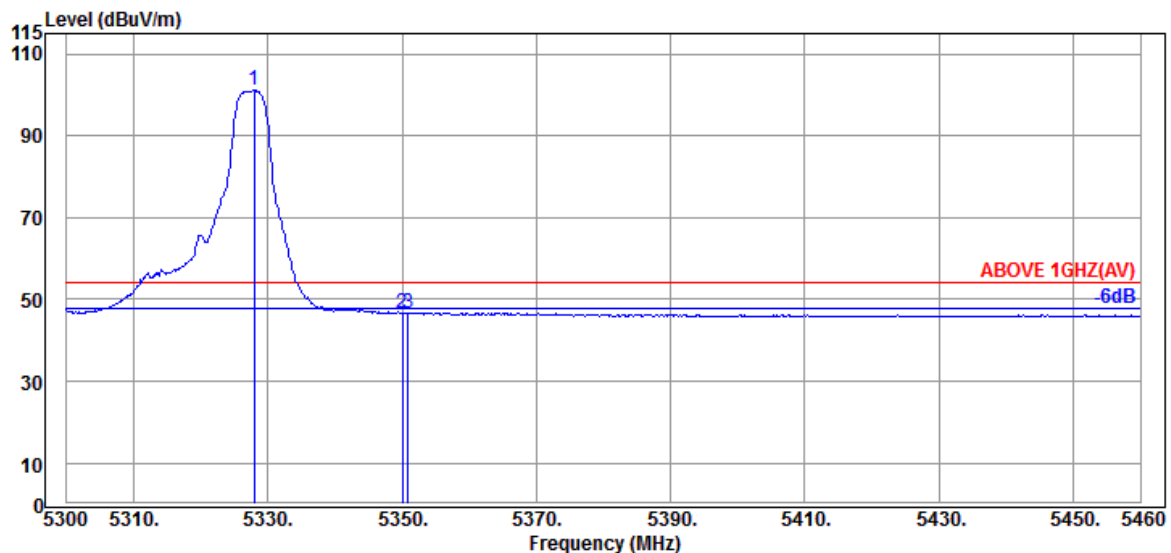

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.57	9.08	34.28	91.94	101.31	---	---	Average
5350.080	34.60	9.10	34.27	37.29	46.72	54.00	7.28	Average
5350.880	34.60	9.10	34.27	37.37	46.80	54.00	7.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

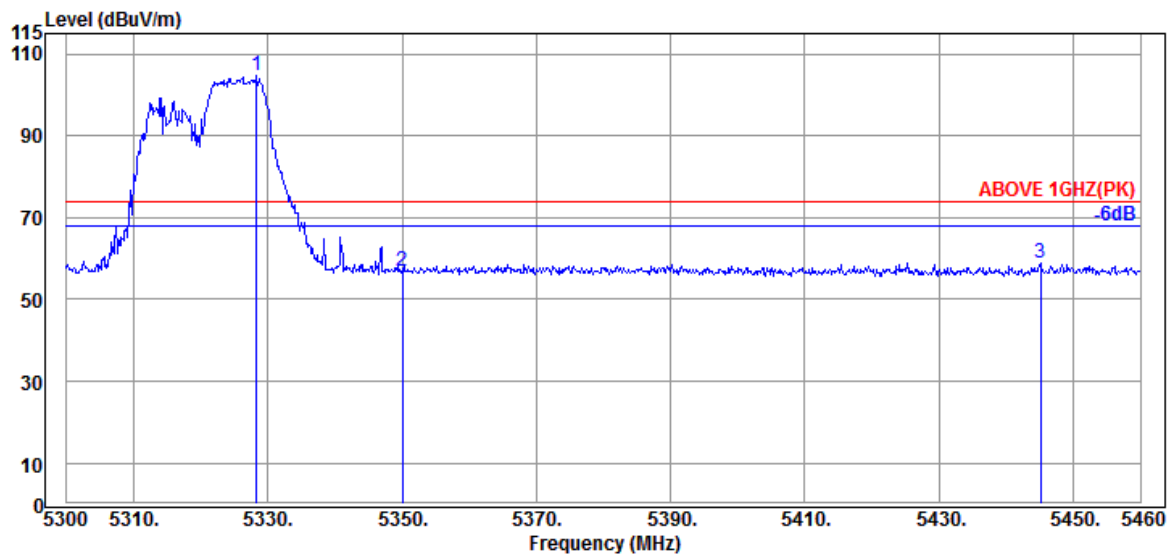

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.57	9.08	34.28	95.19	104.56	---	---	Peak
5350.080	34.60	9.10	34.27	47.44	56.87	74.00	17.13	Peak
5445.120	34.55	9.17	34.25	49.54	59.01	74.00	14.99	Peak

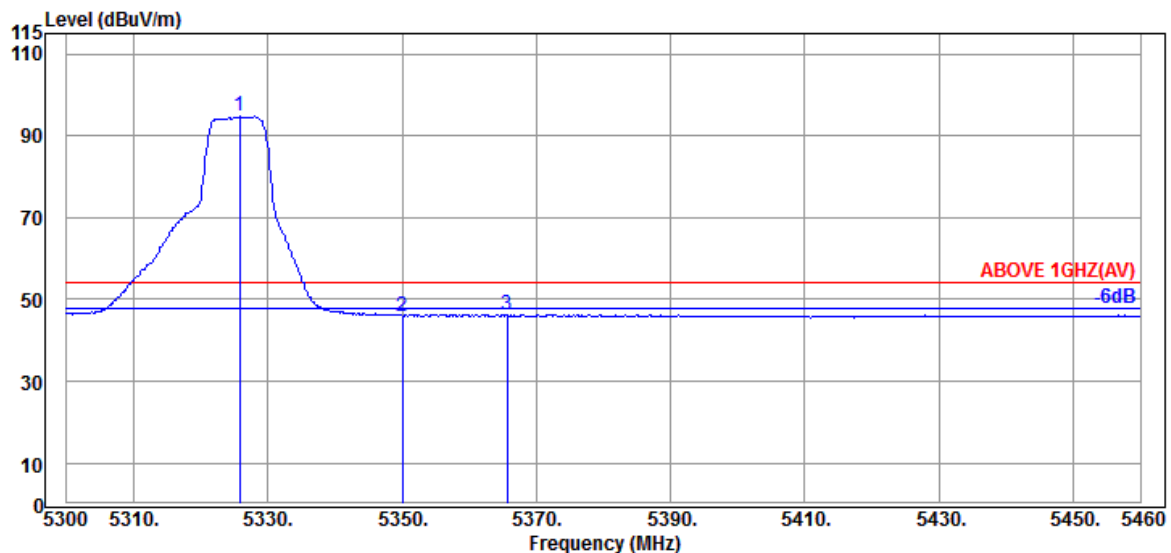

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.760	34.57	9.07	34.28	85.37	94.73	---	---	Average
5350.080	34.60	9.10	34.27	36.59	46.02	54.00	7.98	Average
5365.600	34.63	9.11	34.27	36.89	46.36	54.00	7.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

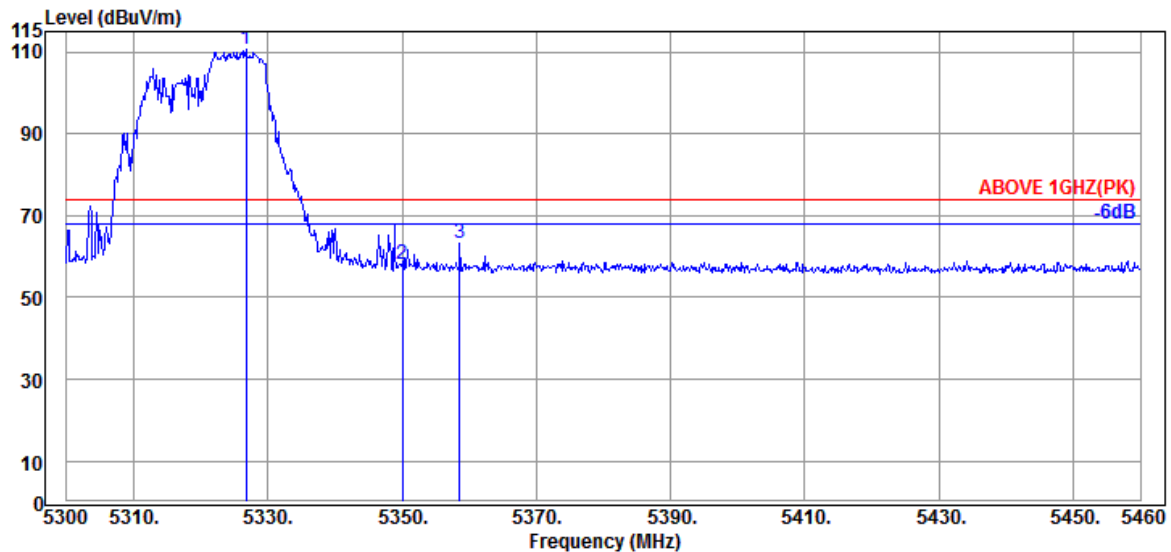

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.720	34.57	9.08	34.28	101.47	110.84	---	---	Peak
	5350.080	34.60	9.10	34.27	48.73	58.16	74.00	15.84	Peak
	5358.560	34.63	9.10	34.27	53.66	63.12	74.00	10.88	Peak

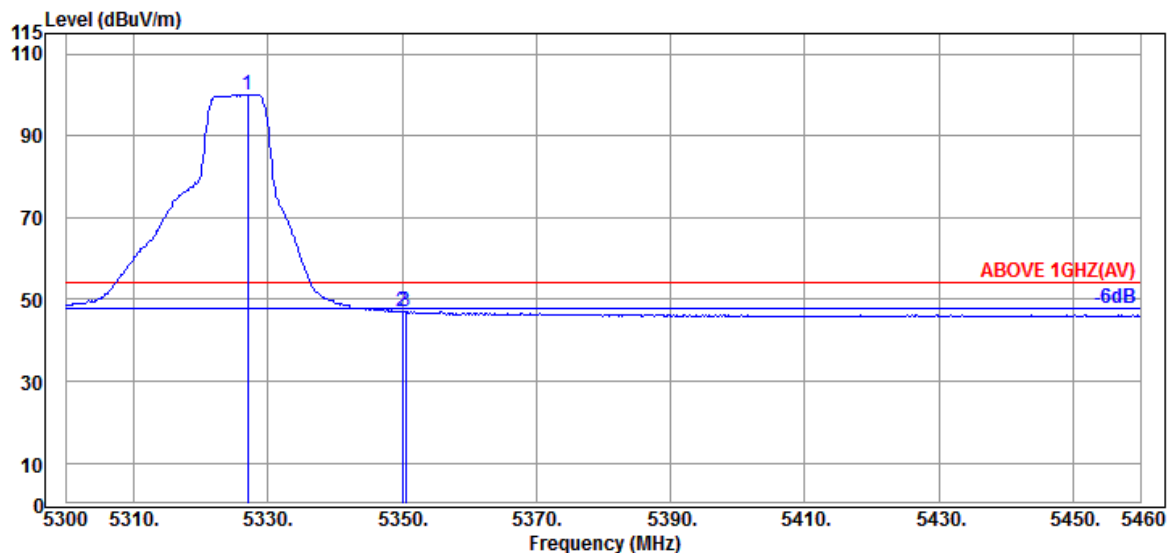

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.040	34.57	9.08	34.28	90.76	100.13	---	---	Average
	5350.080	34.60	9.10	34.27	37.50	46.93	54.00	7.07	Average
	5350.560	34.60	9.10	34.27	37.65	47.08	54.00	6.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

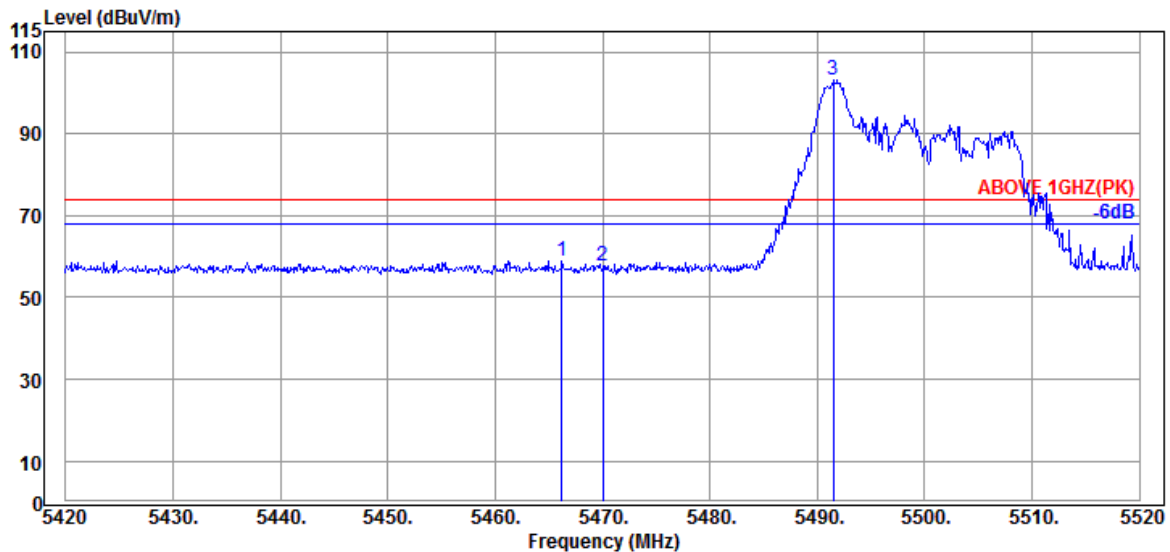

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.47	9.20	34.24	49.53	58.96	74.00	15.04	Peak
5470.000	34.47	9.20	34.24	48.41	57.84	74.00	16.16	Peak
@ 5491.500	34.43	9.21	34.23	93.81	103.22	---	---	Peak

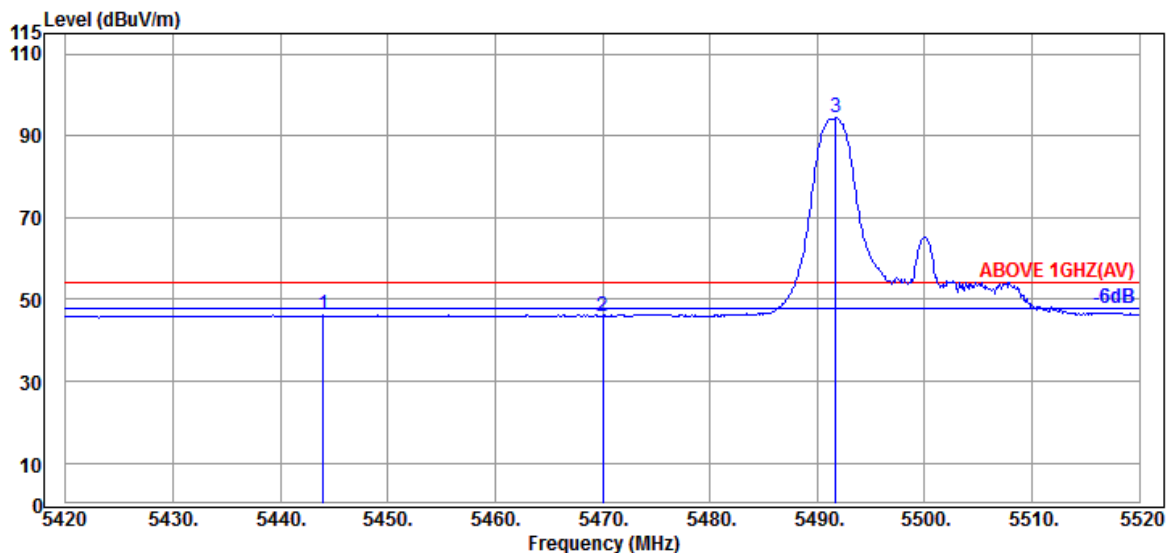

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.000	34.55	9.17	34.25	36.72	46.19	54.00	7.81	Average
5470.000	34.47	9.20	34.24	36.58	46.01	54.00	7.99	Average
@ 5491.700	34.43	9.21	34.23	84.99	94.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

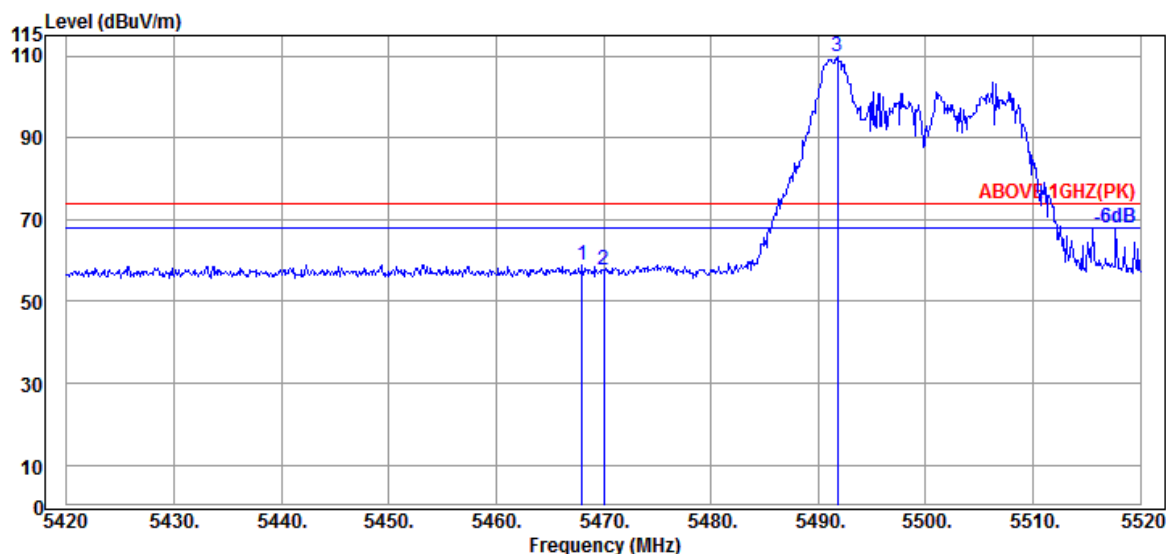

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.47	9.20	34.24	49.64	59.07	74.00	14.93	Peak
5470.000	34.47	9.20	34.24	48.15	57.58	74.00	16.42	Peak
@ 5491.800	34.43	9.21	34.23	100.34	109.75	---	---	Peak

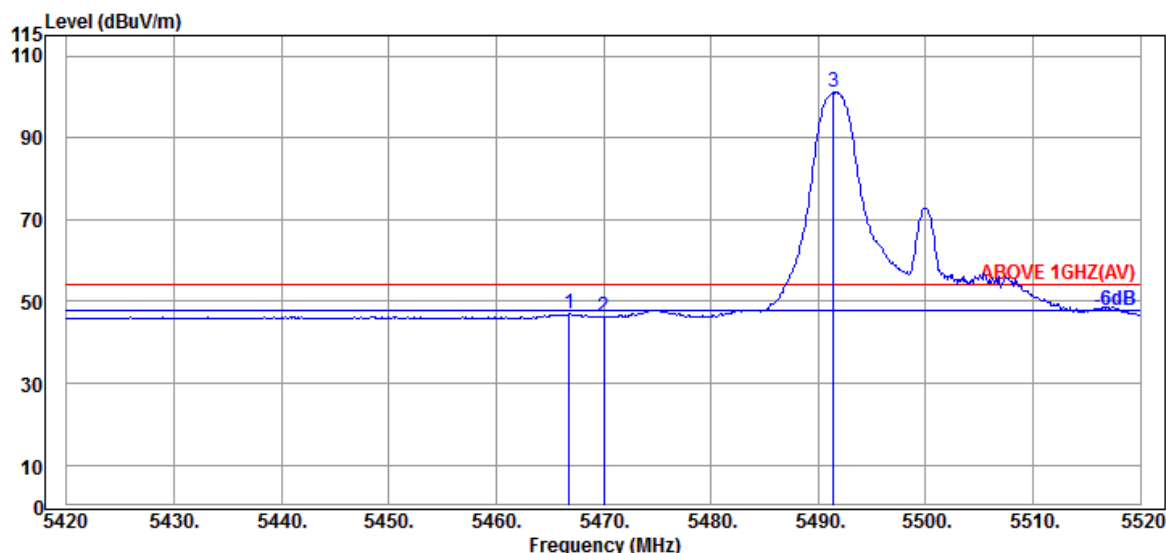

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.47	9.20	34.24	37.45	46.88	54.00	7.12	Average
5470.000	34.47	9.20	34.24	36.81	46.24	54.00	7.76	Average
@ 5491.400	34.43	9.21	34.23	91.68	101.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

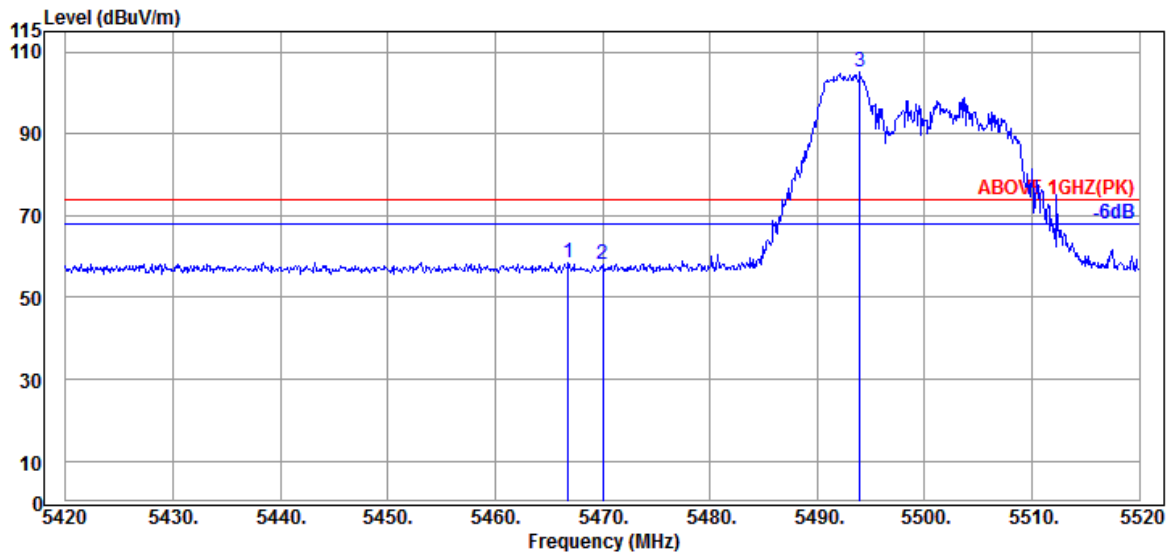

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.47	9.20	34.24	49.18	58.61	74.00	15.39	Peak
5470.000	34.47	9.20	34.24	48.70	58.13	74.00	15.87	Peak
@ 5494.000	34.43	9.21	34.23	95.54	104.95	---	---	Peak

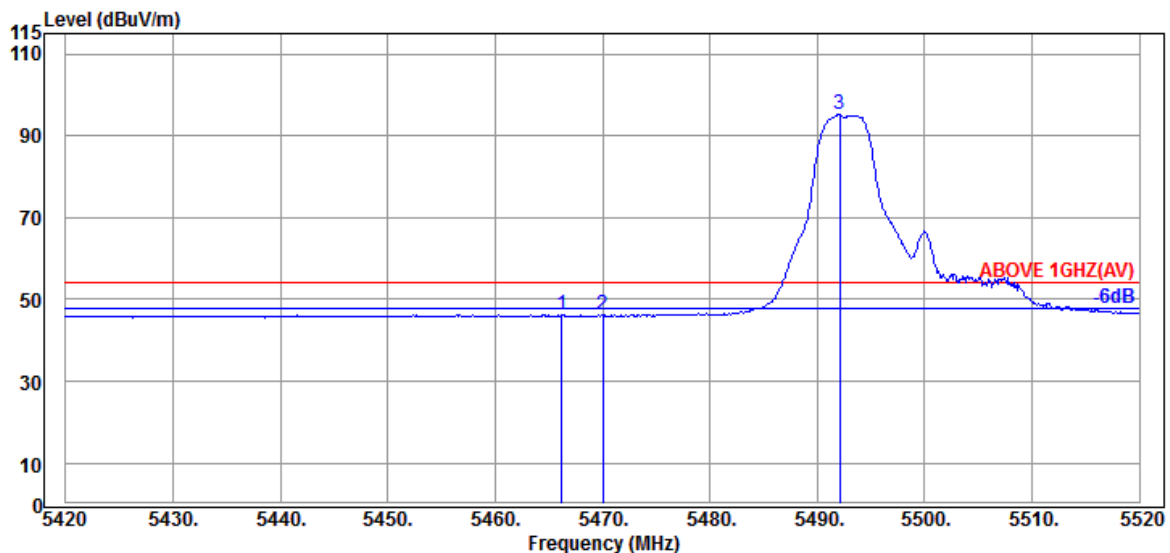

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.47	9.20	34.24	36.85	46.28	54.00	7.72	Average
5470.000	34.47	9.20	34.24	36.65	46.08	54.00	7.92	Average
@ 5492.100	34.43	9.21	34.23	85.75	95.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

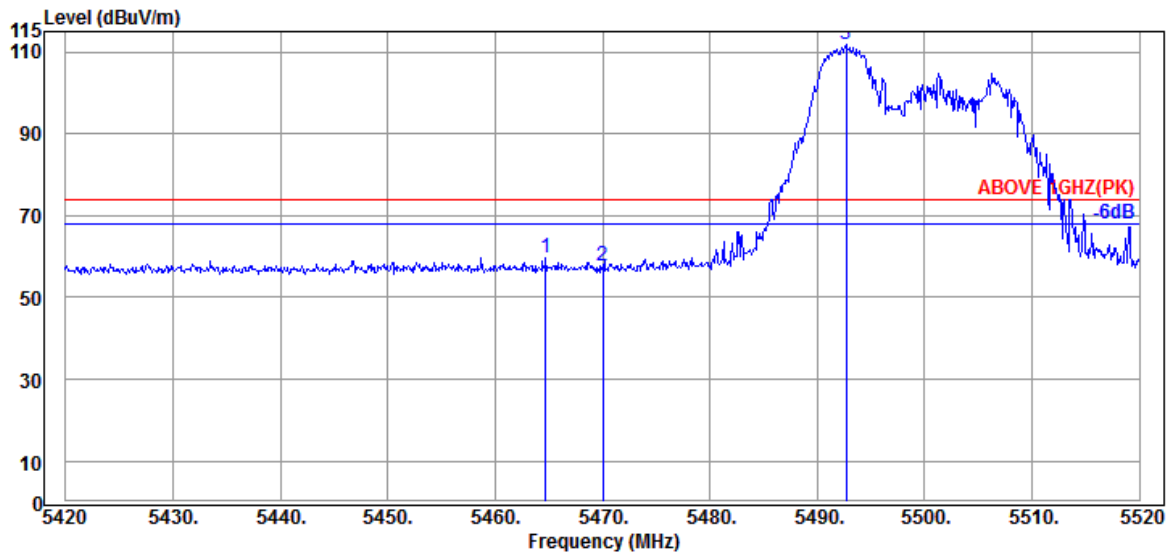

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.47	9.20	34.24	50.24	59.67	74.00	14.33	Peak
5470.000	34.47	9.20	34.24	48.35	57.78	74.00	16.22	Peak
@ 5492.700	34.43	9.21	34.23	102.52	111.93	---	---	Peak

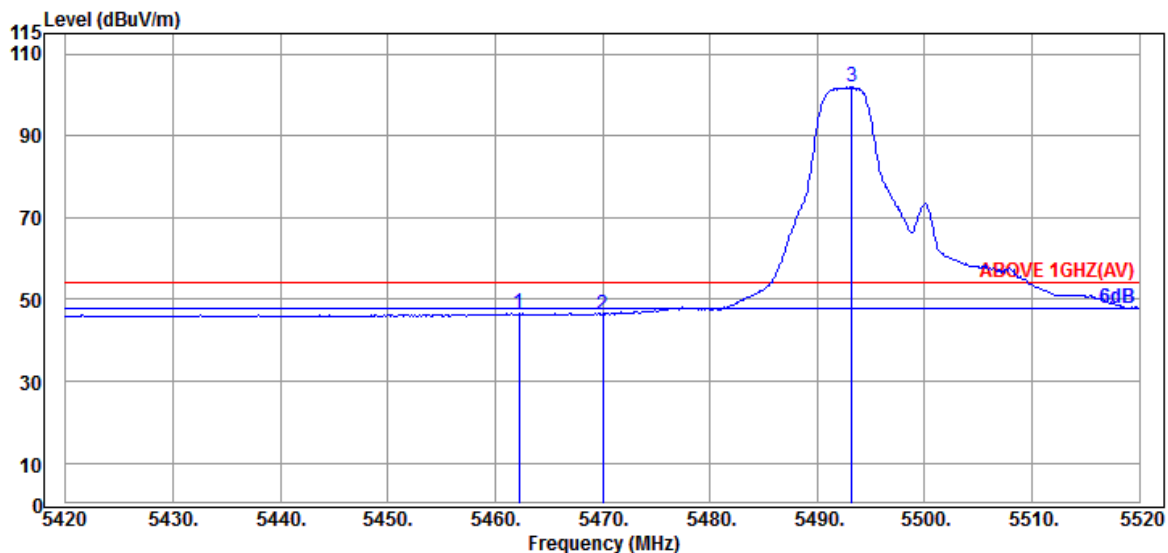

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.200	34.50	9.18	34.24	37.13	46.57	54.00	7.43	Average
5470.000	34.47	9.20	34.24	36.91	46.34	54.00	7.66	Average
@ 5493.200	34.43	9.21	34.23	92.57	101.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

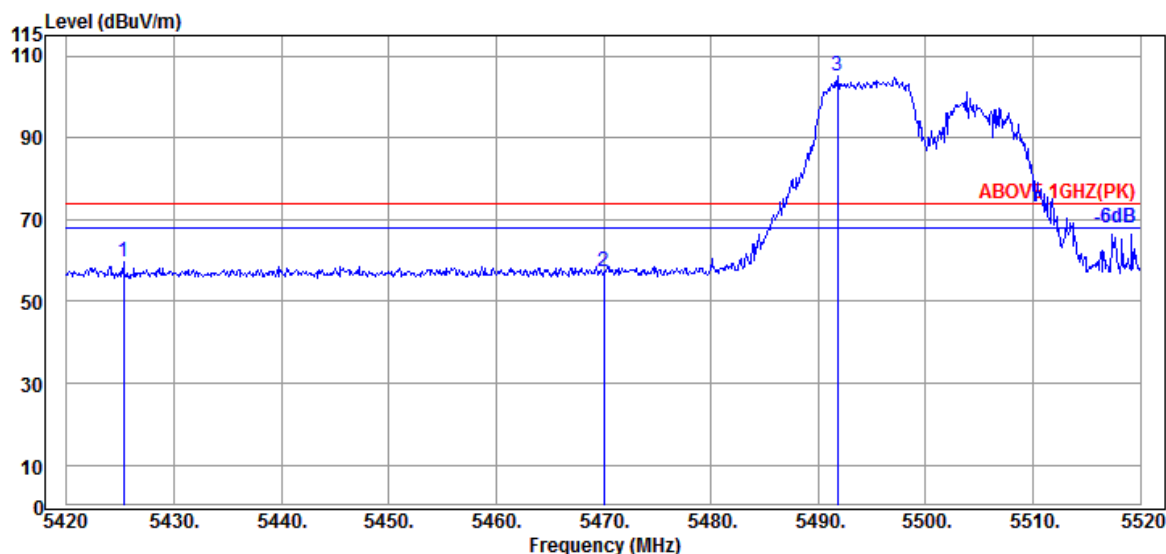

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.300	34.60	9.15	34.25	50.30	59.80	74.00	14.20	Peak
5470.000	34.47	9.20	34.24	47.90	57.33	74.00	16.67	Peak
@ 5491.800	34.43	9.21	34.23	95.64	105.05	---	---	Peak

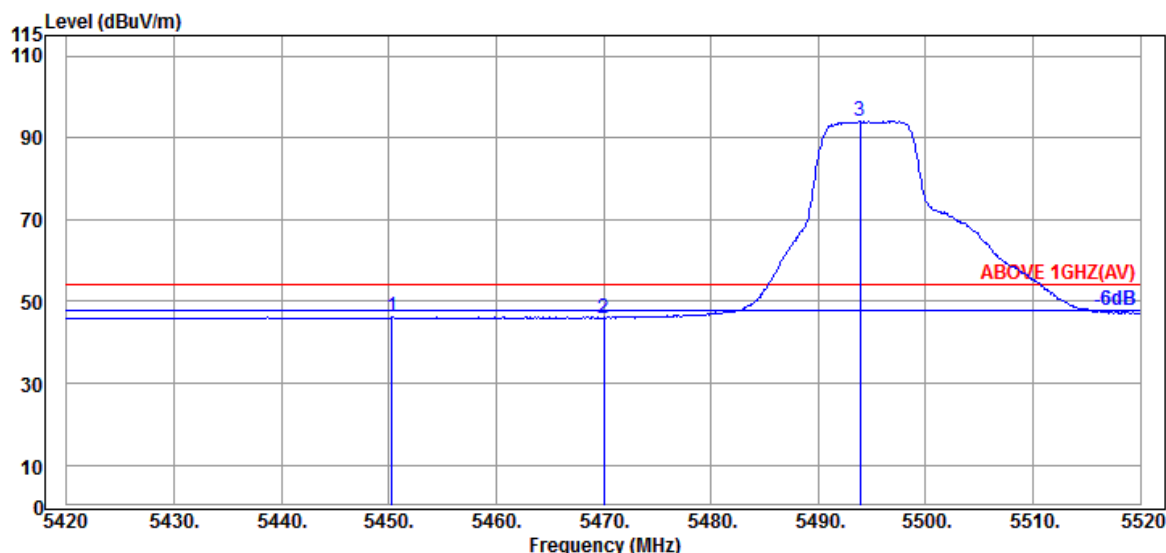

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.300	34.50	9.18	34.24	36.94	46.38	54.00	7.62	Average
5470.000	34.47	9.20	34.24	36.59	46.02	54.00	7.98	Average
@ 5493.900	34.43	9.21	34.23	84.64	94.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

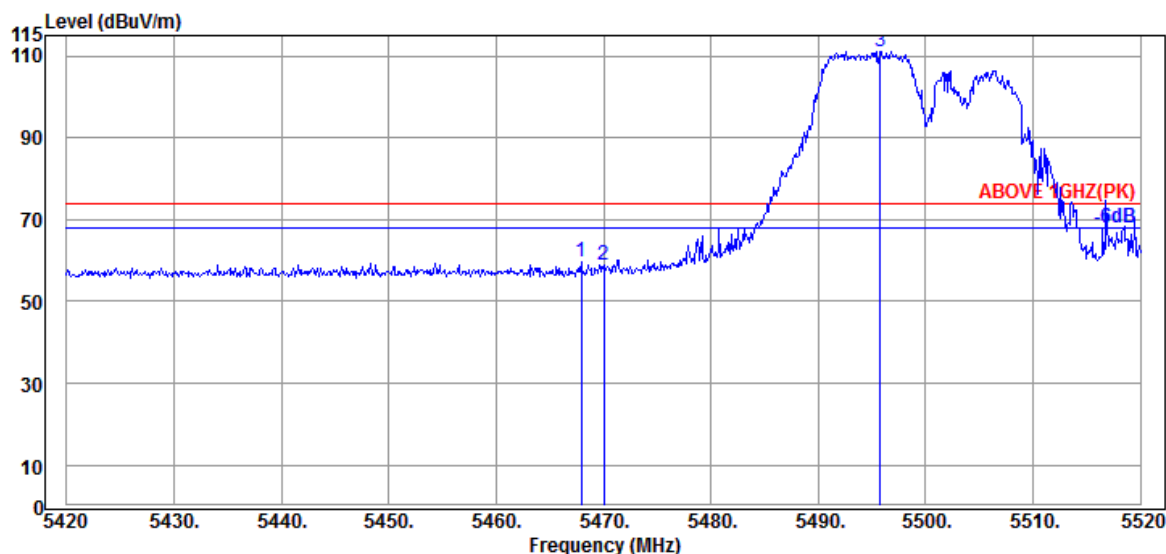

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.47	9.20	34.24	50.12	59.55	74.00	14.45	Peak
5470.000	34.47	9.20	34.24	49.33	58.76	74.00	15.24	Peak
@ 5495.800	34.40	9.21	34.23	101.73	111.11	---	---	Peak

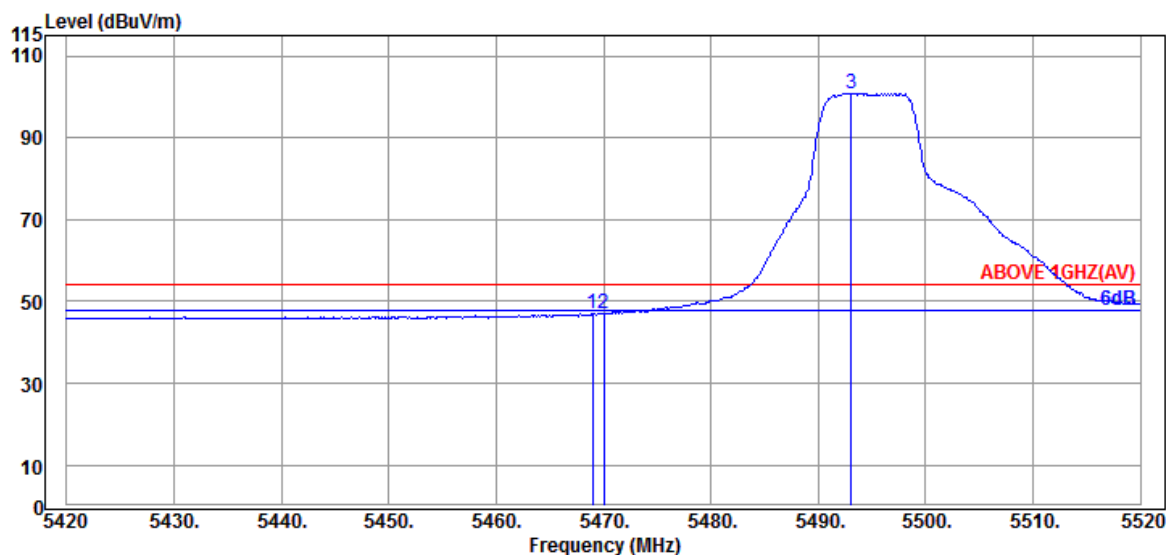

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	9.20	34.24	37.46	46.89	54.00	7.11	Average
5470.000	34.47	9.20	34.24	37.78	47.21	54.00	6.79	Average
@ 5493.100	34.43	9.21	34.23	91.48	100.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

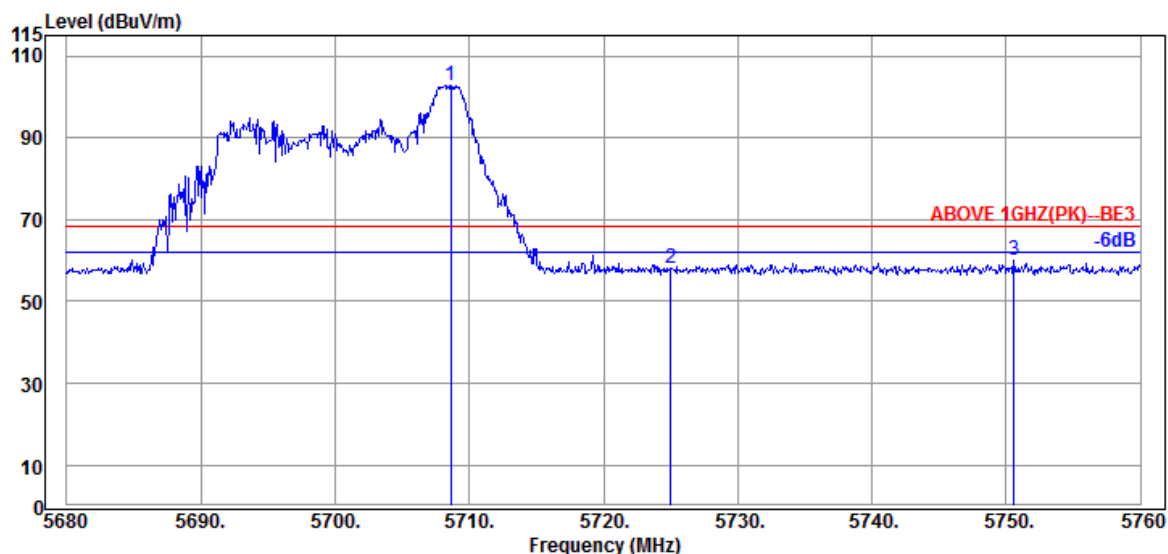

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.640	34.53	9.40	34.32	93.29	102.90	---	---	Peak
5725.040	34.67	9.42	34.32	48.42	58.19	68.20	10.01	Peak
5750.560	34.80	9.43	34.33	49.98	59.88	68.20	8.32	Peak

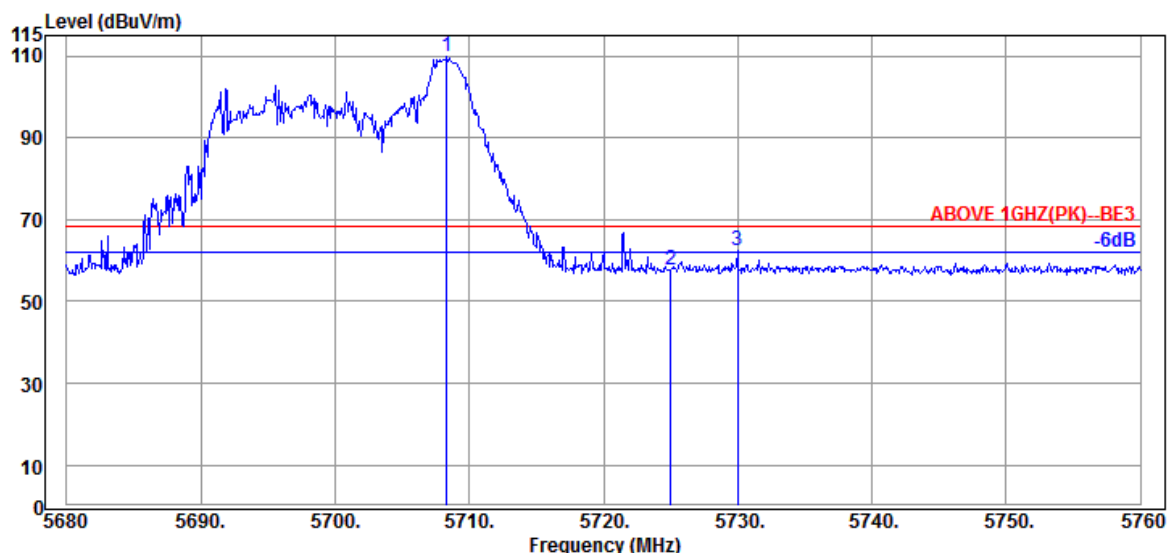

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.320	34.53	9.40	34.32	100.13	109.74	---	---	Peak
5725.040	34.67	9.42	34.32	47.85	57.62	68.20	10.58	Peak
5730.000	34.67	9.42	34.32	52.73	62.50	68.20	5.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

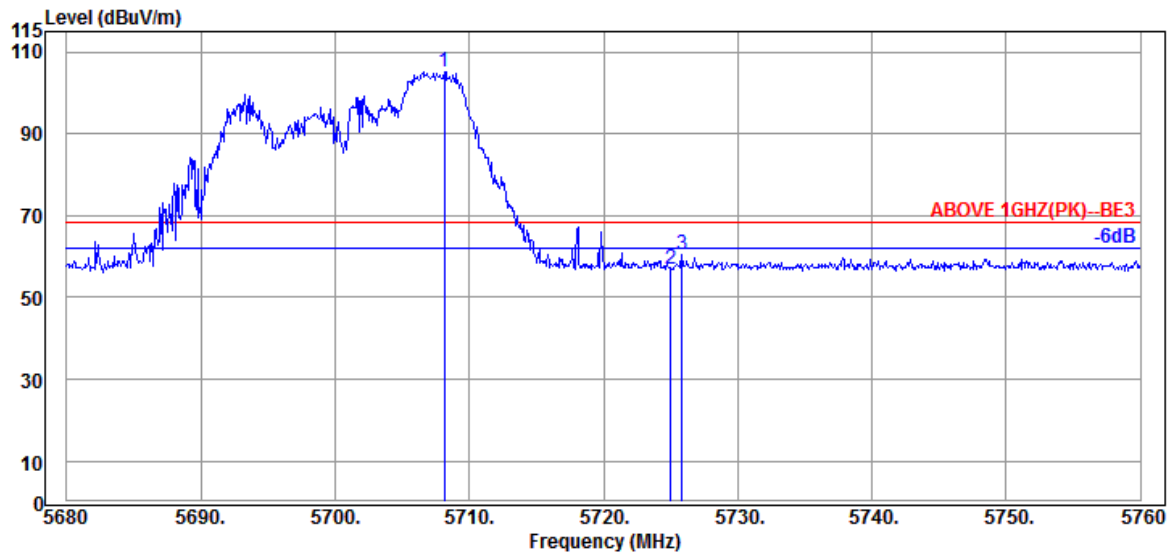

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.160	34.53	9.40	34.32	95.71	105.32	---	---	Peak
	5725.040	34.67	9.42	34.32	47.09	56.86	68.20	11.34	Peak
	5725.840	34.67	9.42	34.32	50.53	60.30	68.20	7.90	Peak

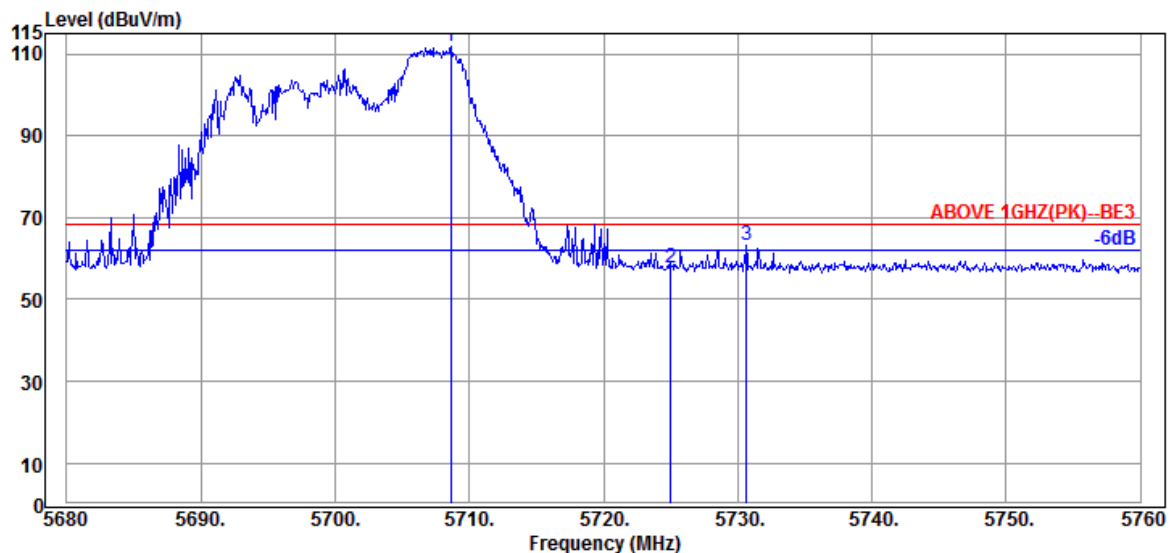

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.640	34.53	9.40	34.32	102.14	111.75	---	---	Peak
	5725.040	34.67	9.42	34.32	48.06	57.83	68.20	10.37	Peak
	5730.640	34.67	9.42	34.33	53.28	63.04	68.20	5.16	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

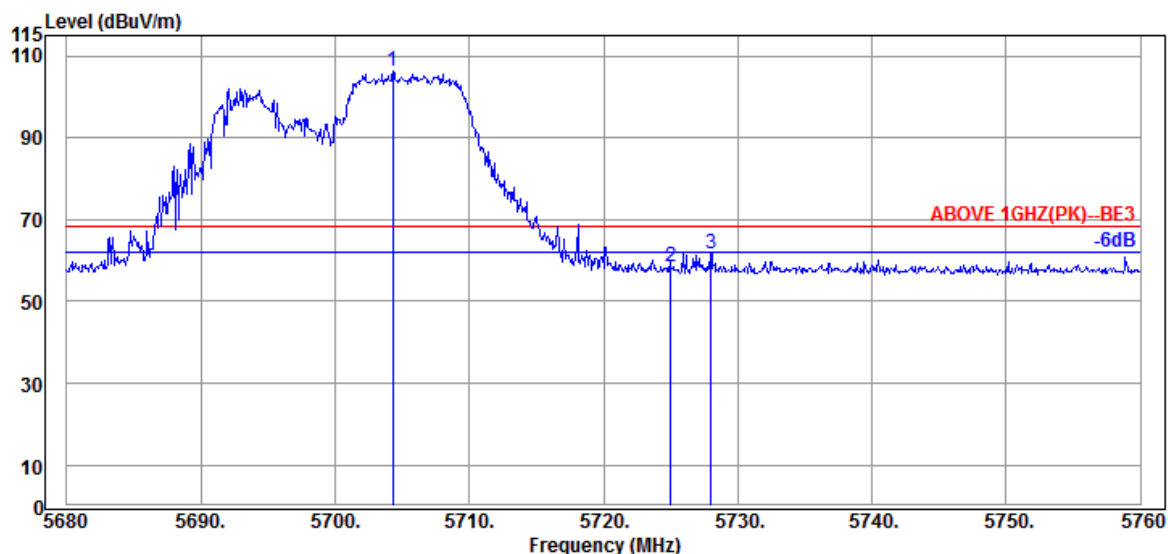

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5704.320	34.40	9.40	34.31	96.74	106.23	---	---	Peak
	5725.040	34.67	9.42	34.32	48.52	58.29	68.20	9.91	Peak
	5728.000	34.67	9.42	34.32	51.92	61.69	68.20	6.51	Peak

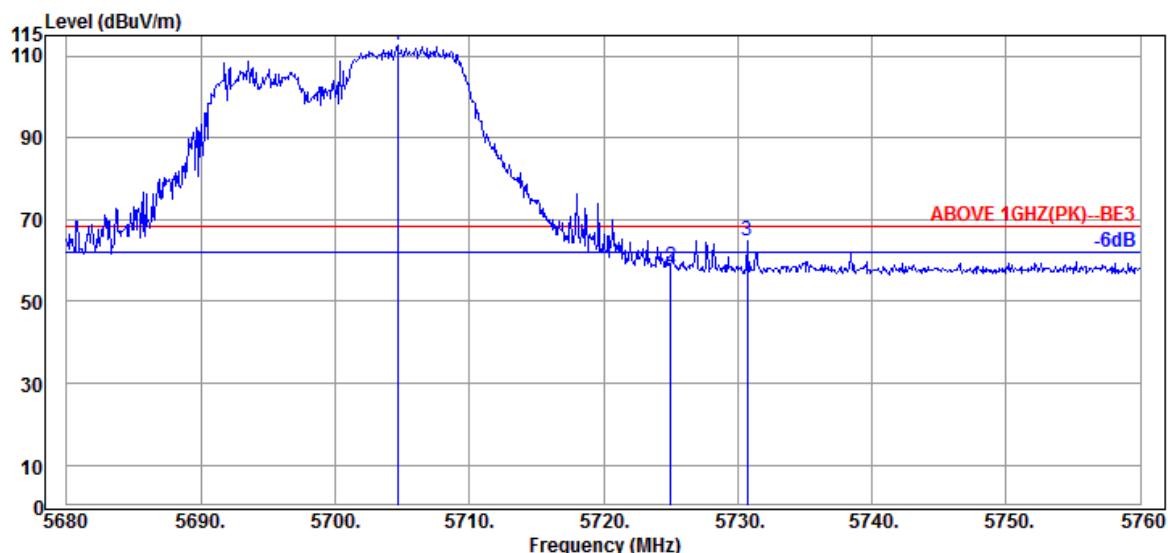

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5704.640	34.40	9.40	34.31	103.20	112.69	---	---	Peak
	5725.040	34.67	9.42	34.32	48.65	58.42	68.20	9.78	Peak
	5730.720	34.67	9.42	34.33	55.15	64.91	68.20	3.29	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

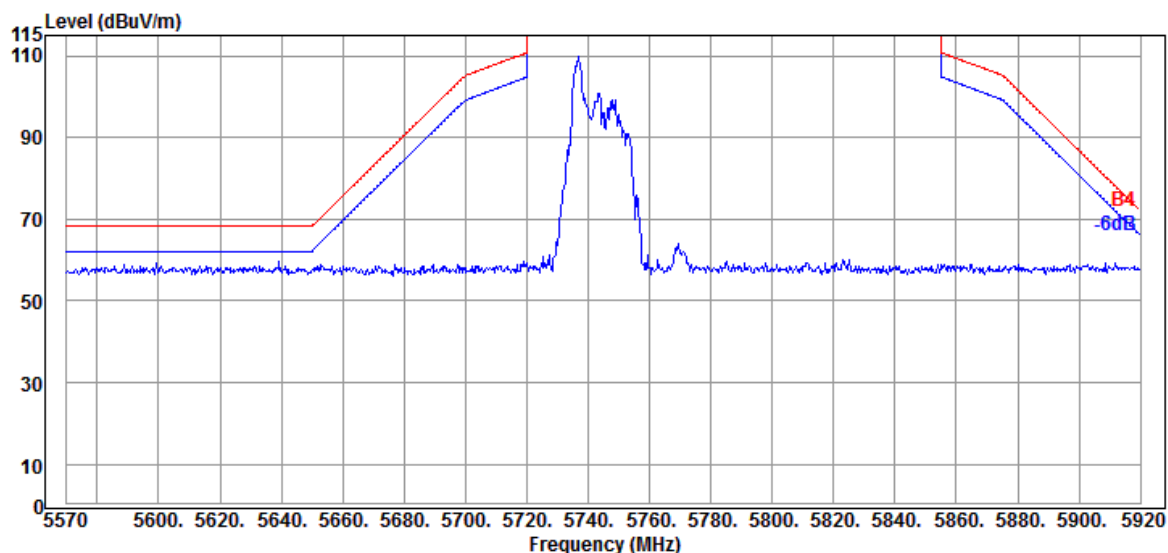

Antenna at Vertical Polarization

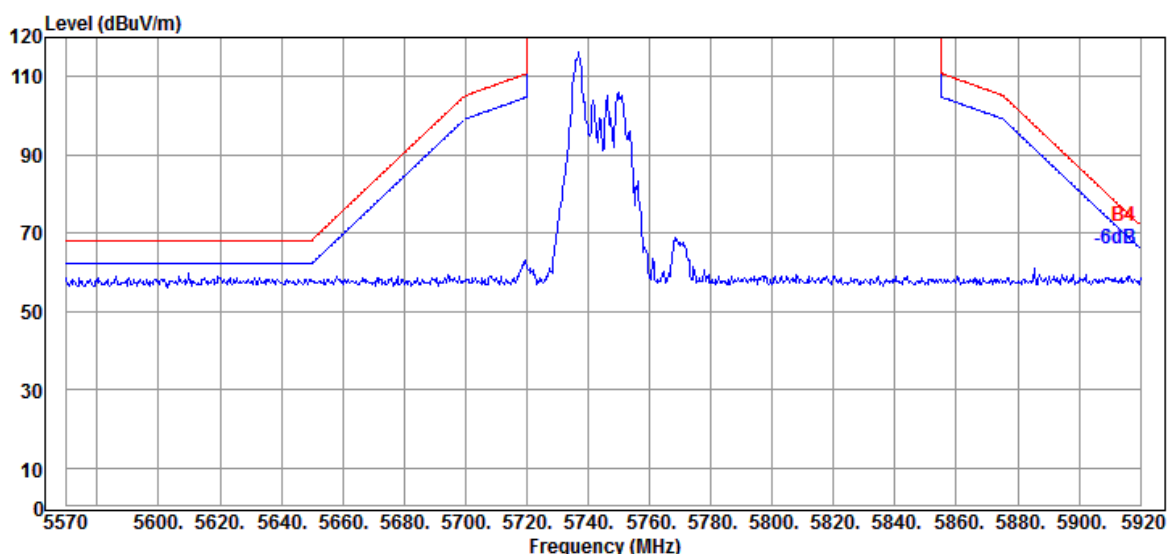


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

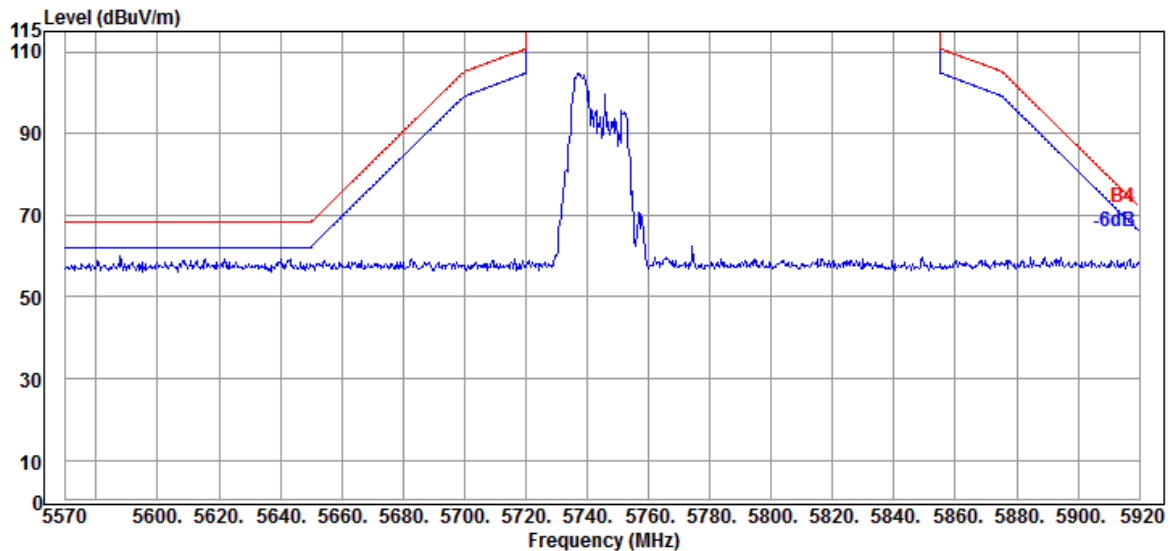

Antenna at Vertical Polarization

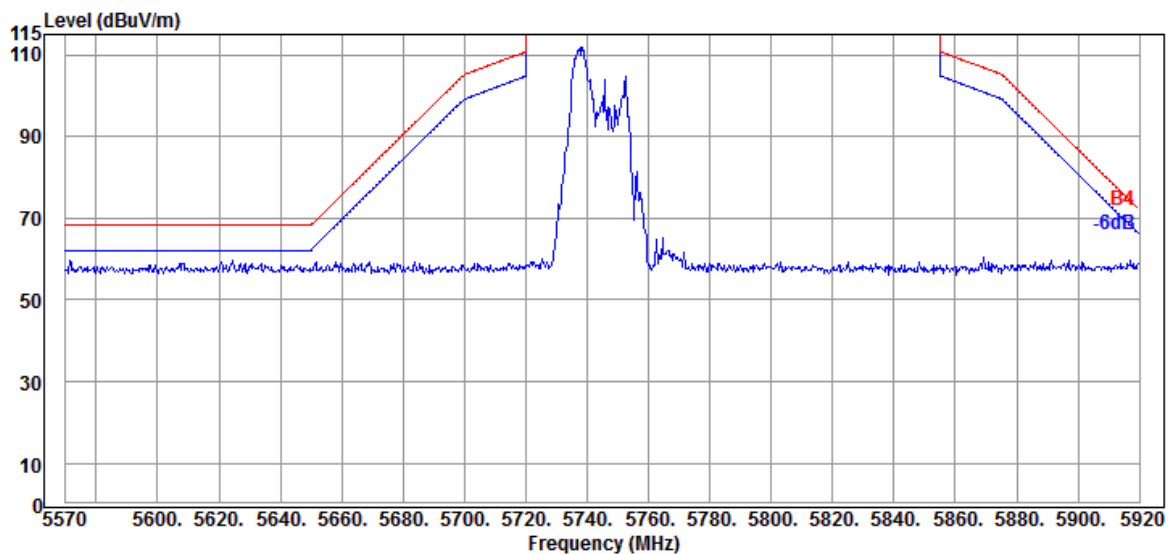


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

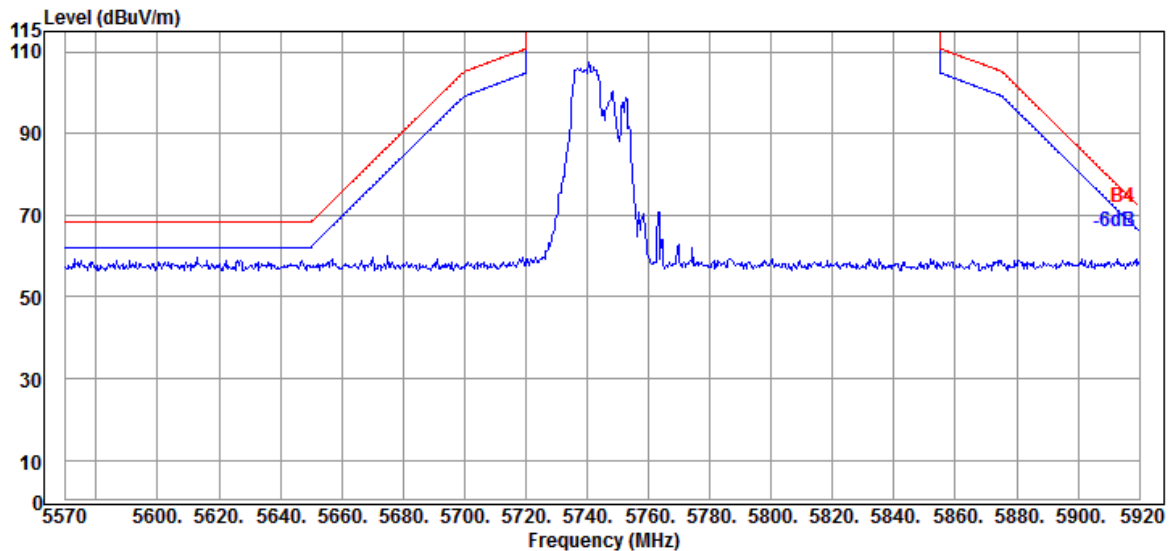

Antenna at Vertical Polarization

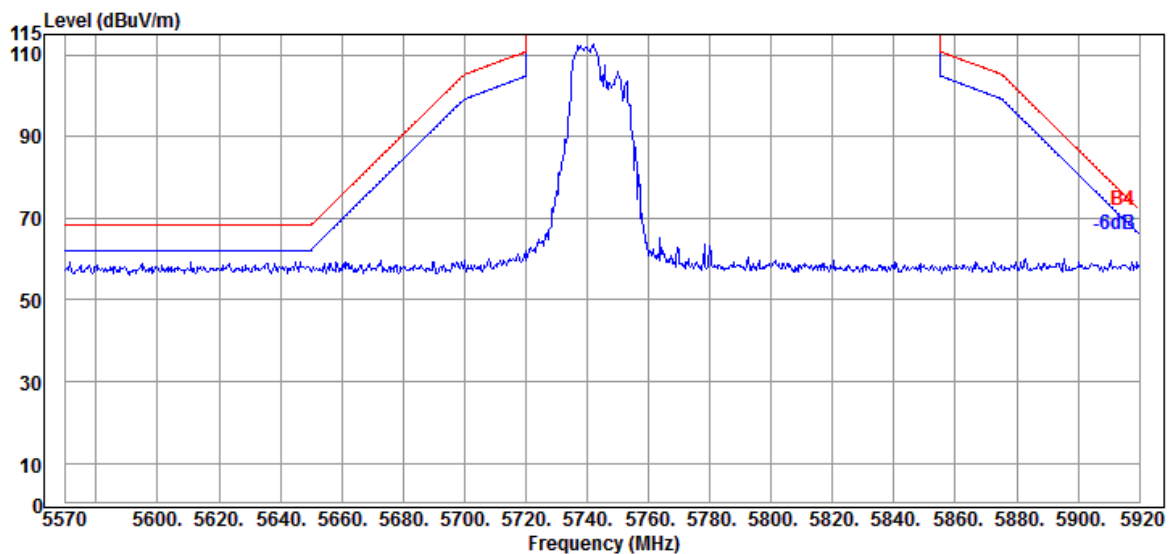


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

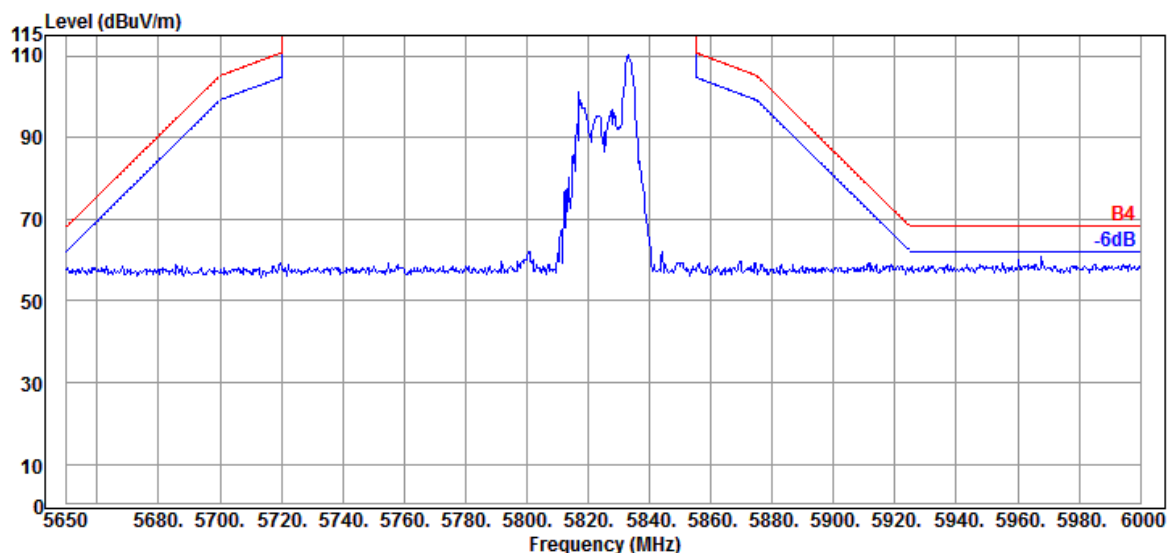

Antenna at Vertical Polarization

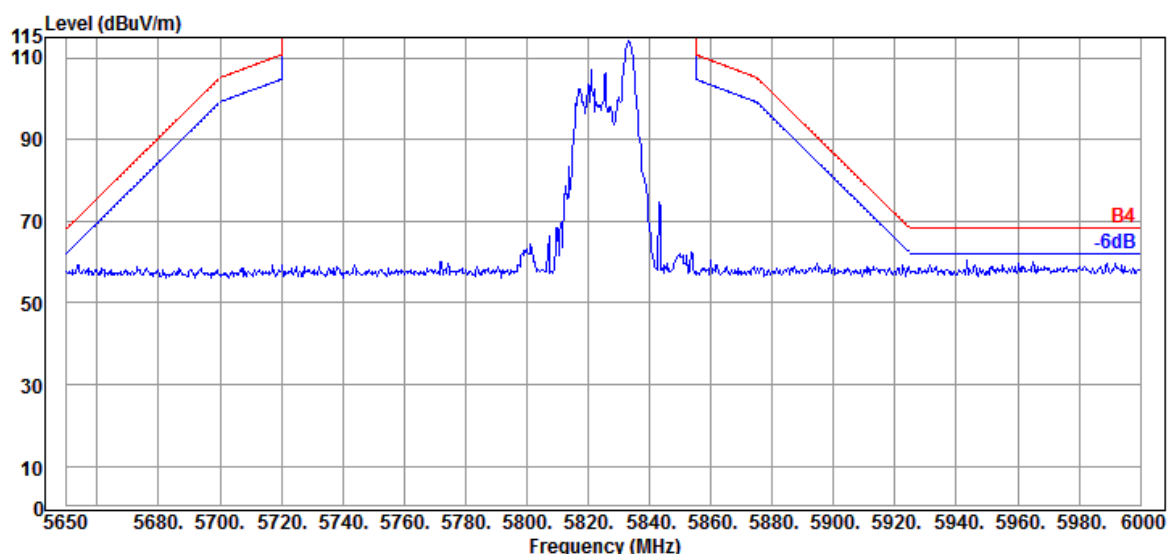


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

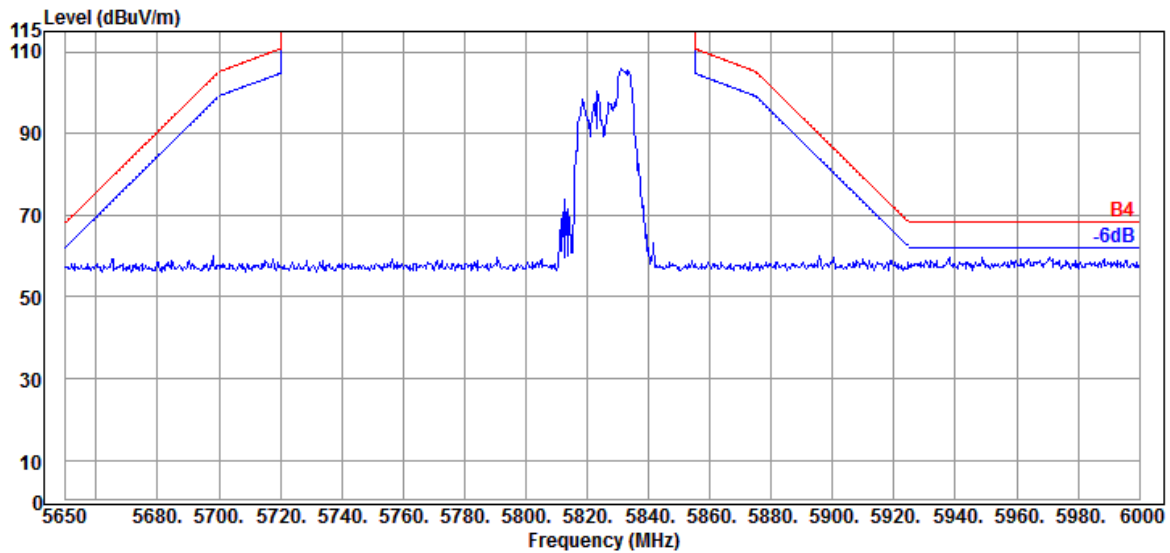

Antenna at Vertical Polarization

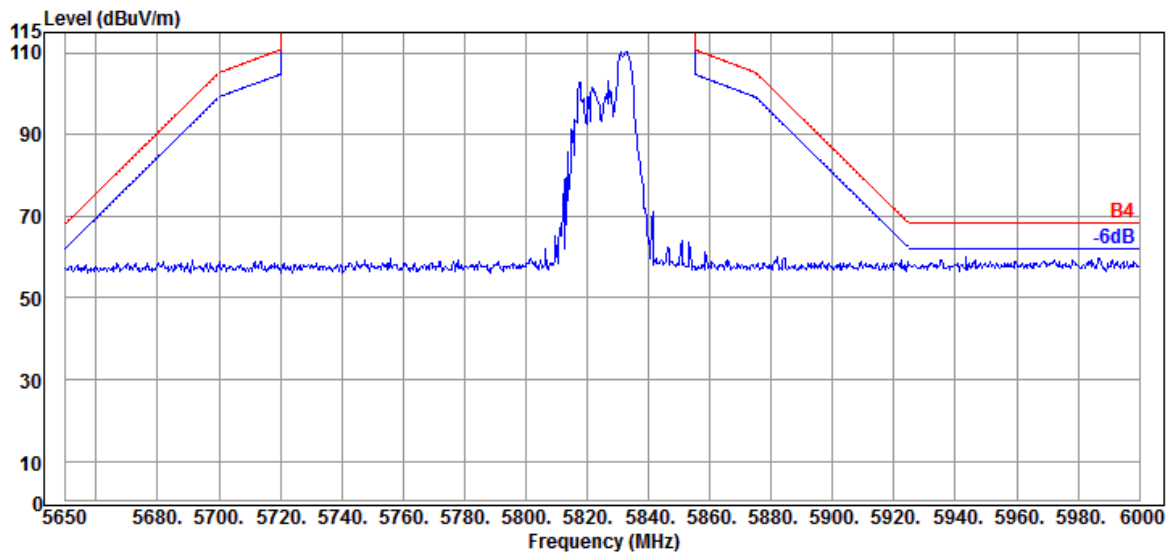

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

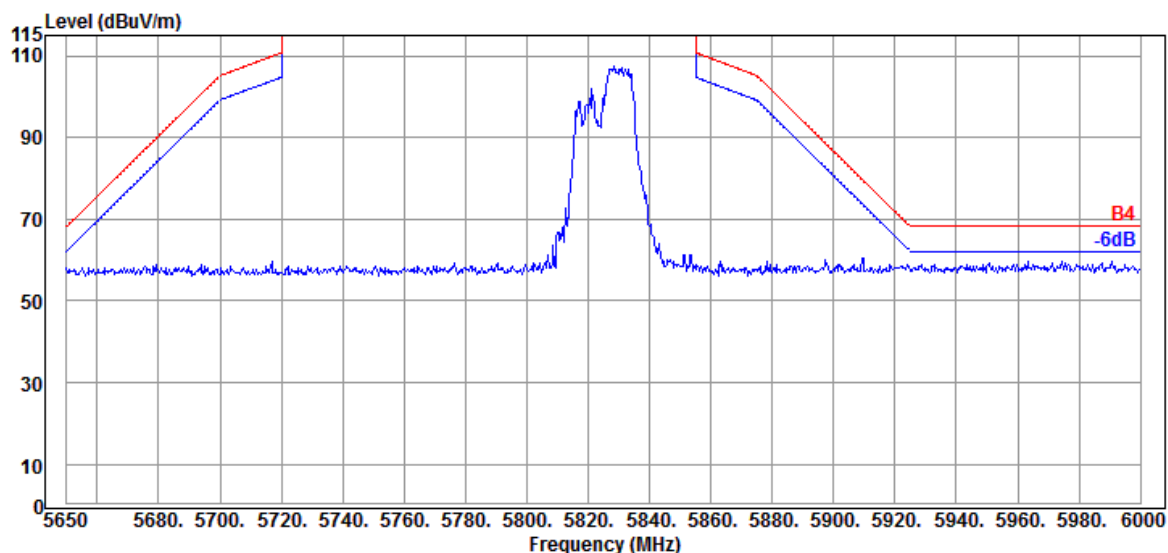

Antenna at Vertical Polarization

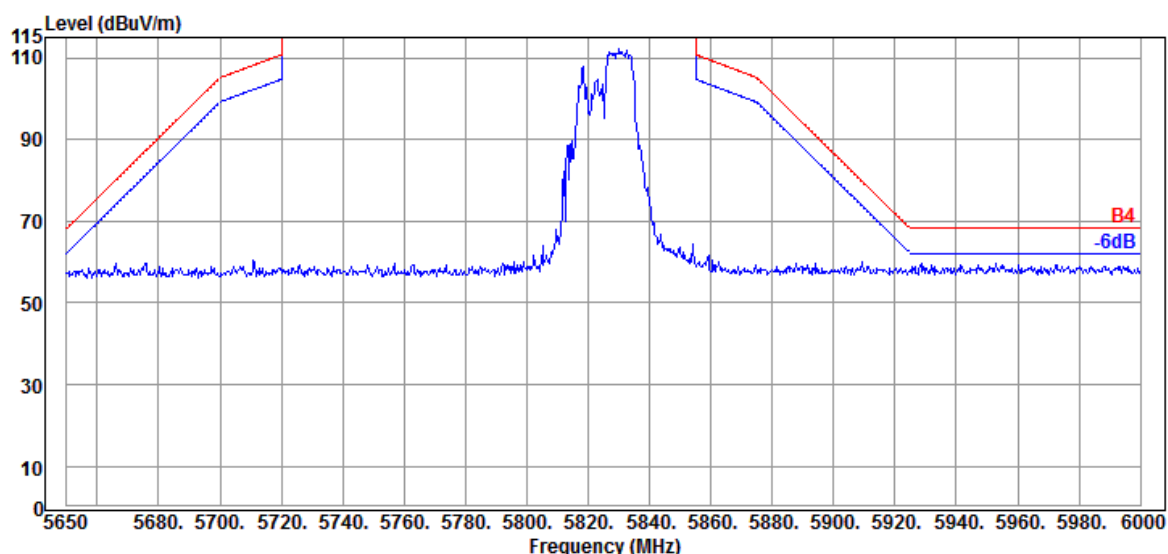

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

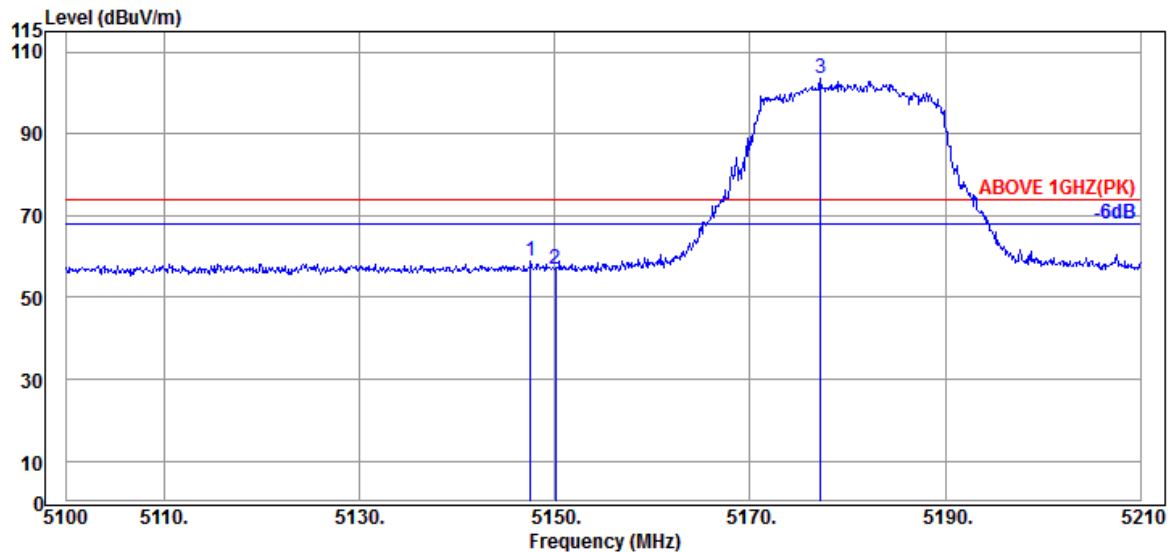

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.520	34.20	8.92	34.35	49.95	58.72	74.00	15.28	Peak
5150.050	34.20	8.92	34.35	48.19	56.96	74.00	17.04	Peak
@ 5177.220	34.20	8.95	34.34	94.65	103.46	---	---	Peak

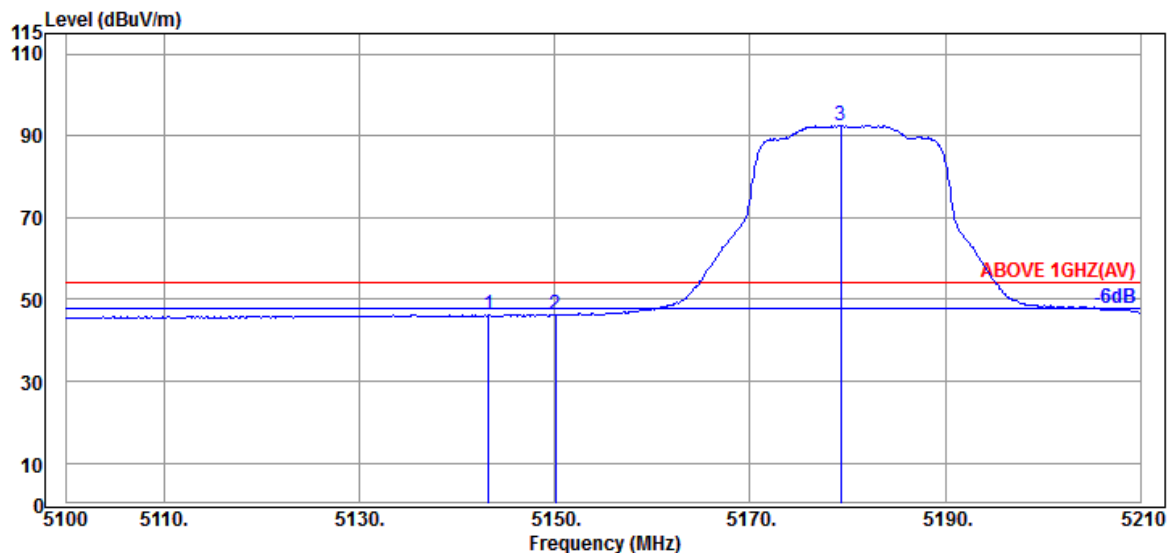

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
514v2.680	34.20	8.92	34.36	41.23	49.99	54.00	4.01	Average
5150.050	34.20	8.92	34.35	41.01	49.78	54.00	4.22	Average
@ 5183.600	34.20	8.95	34.34	81.34	90.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

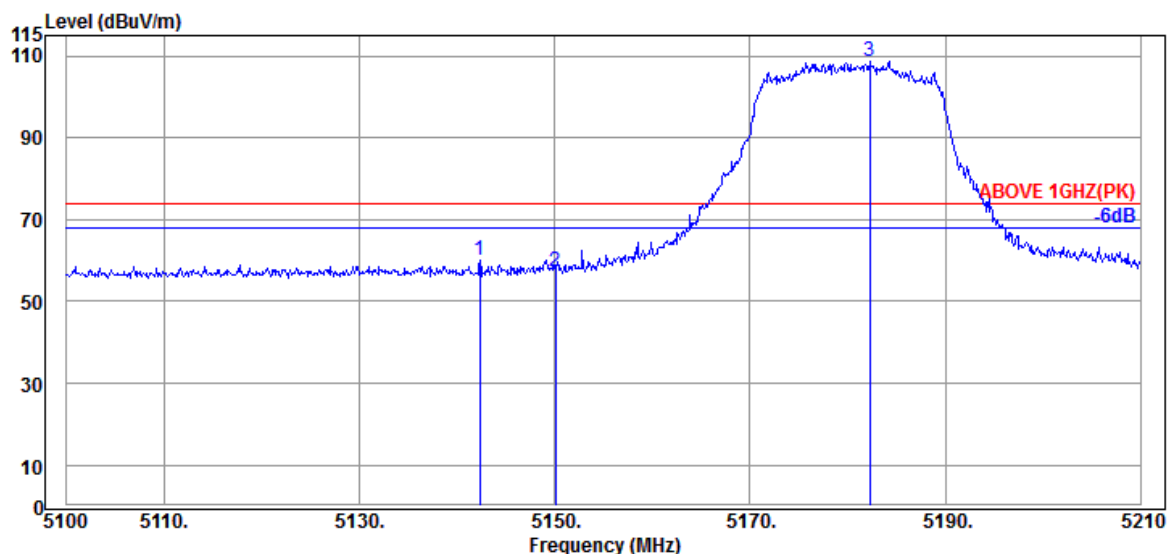

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5142.350	34.20	8.92	34.36	51.48	60.24	74.00	13.76	Peak
5150.050	34.20	8.92	34.35	48.63	57.40	74.00	16.60	Peak
@ 5182.280	34.20	8.95	34.34	99.94	108.75	---	---	Peak

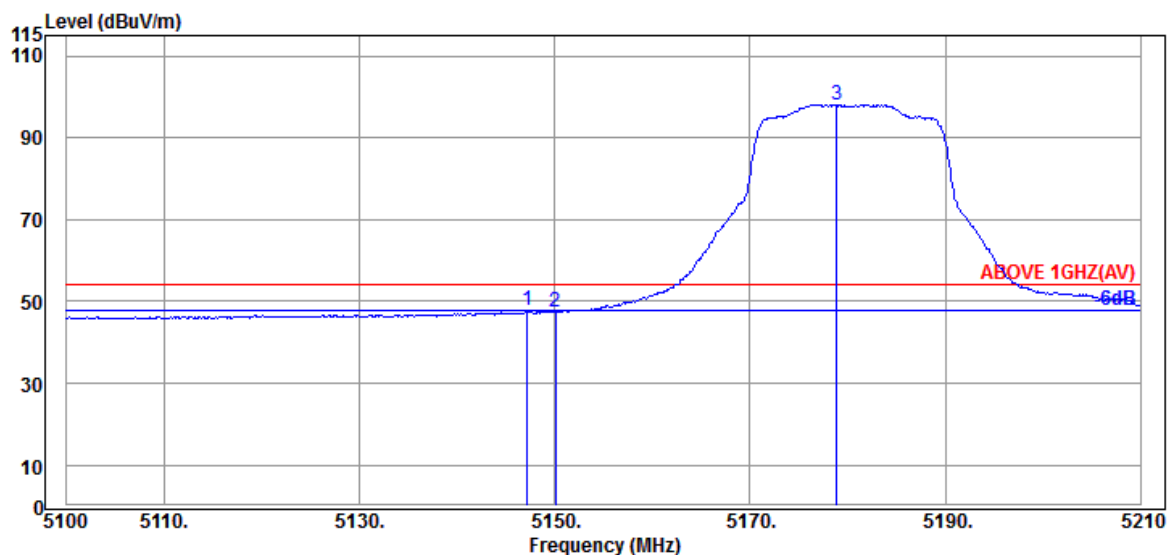

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.190	34.20	8.92	34.35	38.87	47.64	54.00	6.36	Average
5150.050	34.20	8.92	34.35	38.78	47.55	54.00	6.45	Average
@ 5178.870	34.20	8.95	34.34	89.28	98.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

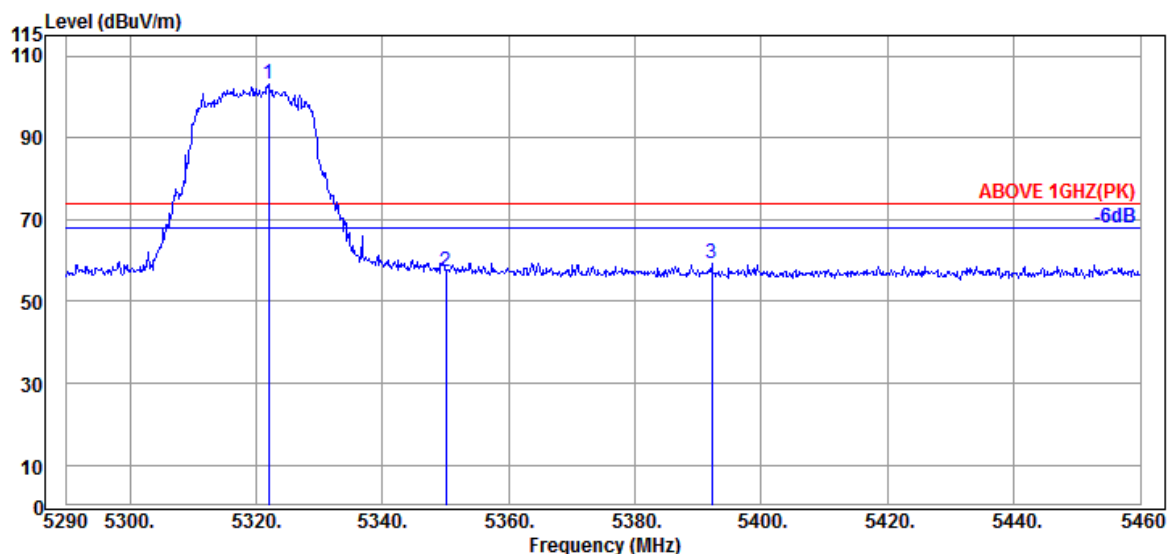

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5321.960	34.53	9.07	34.29	93.75	103.06	---	---	Peak
	5350.010	34.60	9.10	34.27	47.91	57.34	74.00	16.66	Peak
	5392.170	34.70	9.13	34.27	49.88	59.44	74.00	14.56	Peak

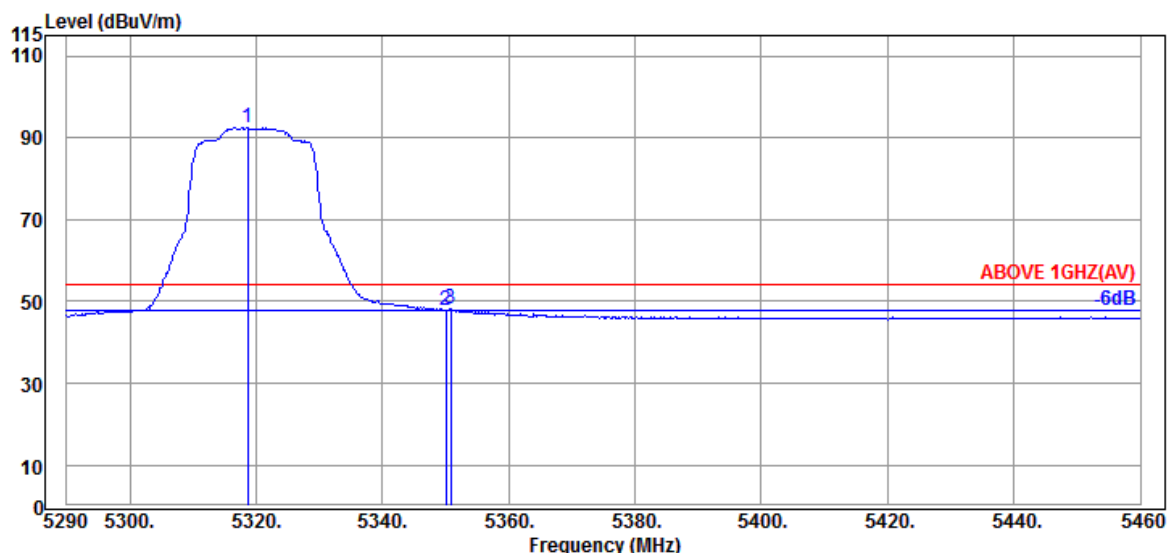

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.730	34.53	9.07	34.29	83.17	92.48	---	---	Average
	5350.010	34.60	9.10	34.27	38.50	47.93	54.00	6.07	Average
	5350.860	34.60	9.10	34.27	38.62	48.05	54.00	5.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

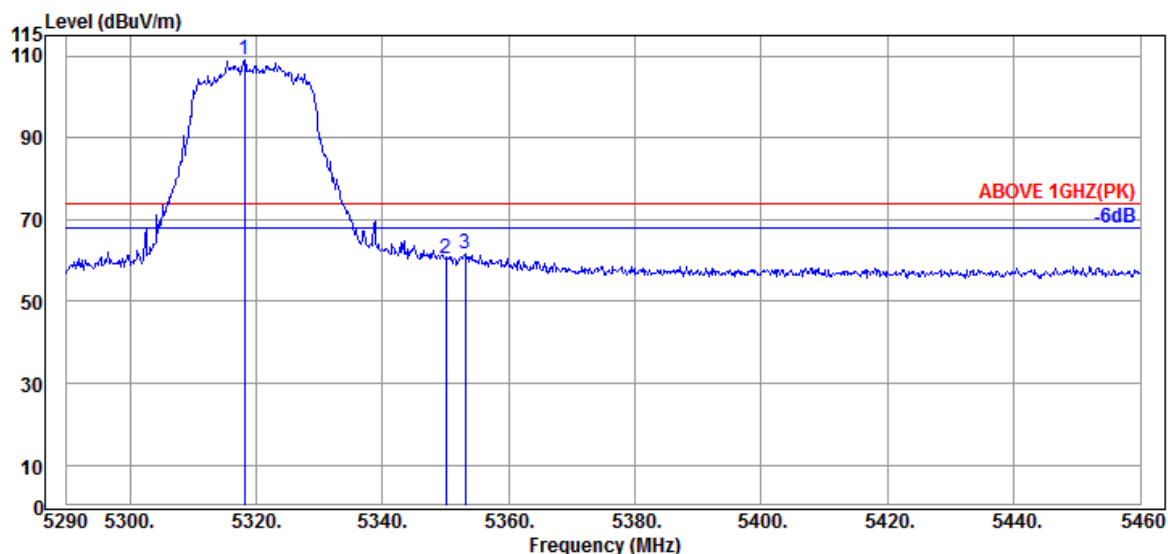

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.220	34.53	9.07	34.29	99.57	108.88	---	---	Peak
	5350.010	34.60	9.10	34.27	50.96	60.39	74.00	13.61	Peak
	5353.070	34.60	9.10	34.27	52.02	61.45	74.00	12.55	Peak

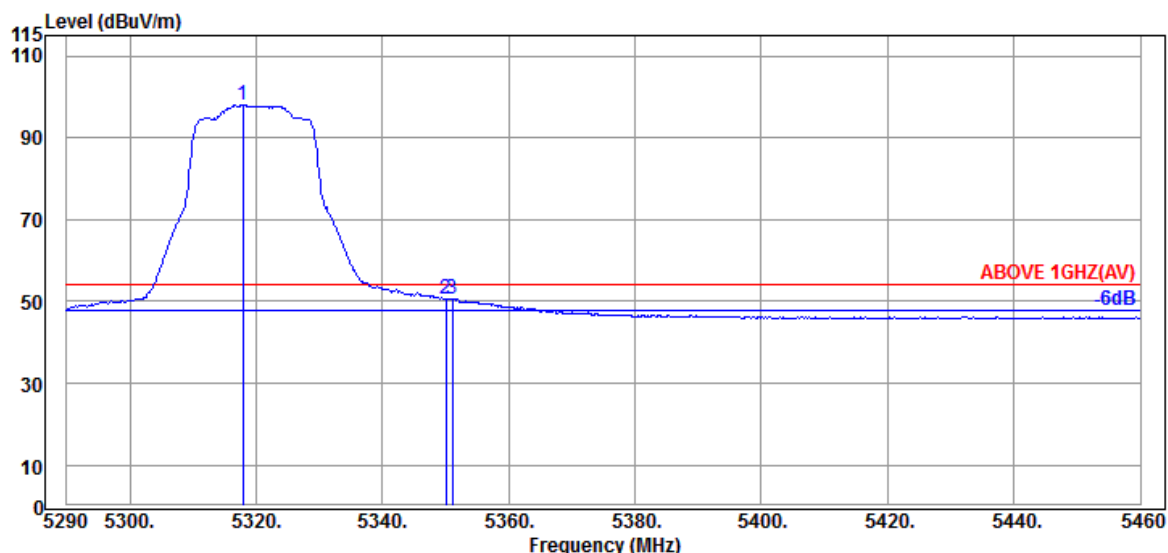

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.880	34.53	9.07	34.29	88.71	98.02	---	---	Average
	5350.010	34.60	9.10	34.27	41.23	50.66	54.00	3.34	Average
	5351.030	34.60	9.10	34.27	41.32	50.75	54.00	3.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

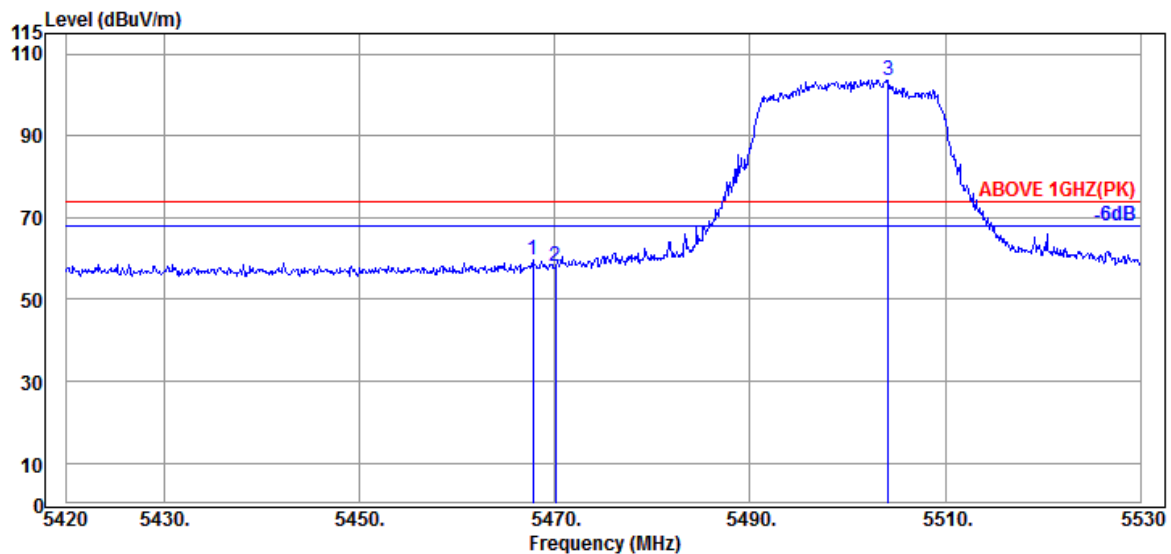

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.740	34.47	9.20	34.24	50.22	59.65	74.00	14.35	Peak
5470.050	34.47	9.20	34.24	48.55	57.98	74.00	16.02	Peak
@ 5504.150	34.40	9.23	34.24	94.31	103.70	---	---	Peak

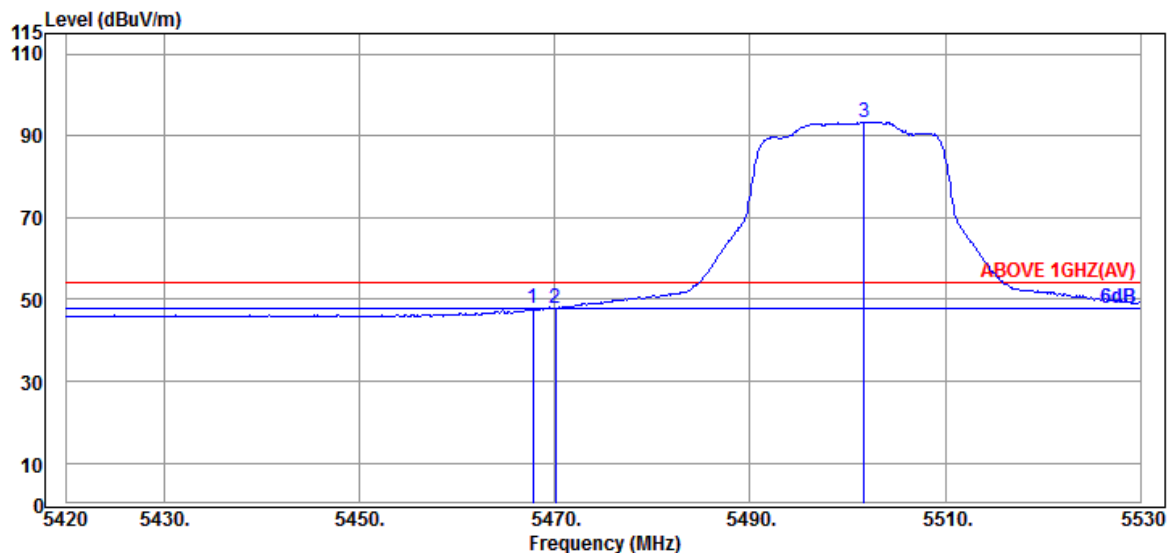

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.740	34.47	9.20	34.24	38.28	47.71	54.00	6.29	Average
5470.050	34.47	9.20	34.24	38.43	47.86	54.00	6.14	Average
@ 5501.730	34.40	9.23	34.24	84.07	93.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

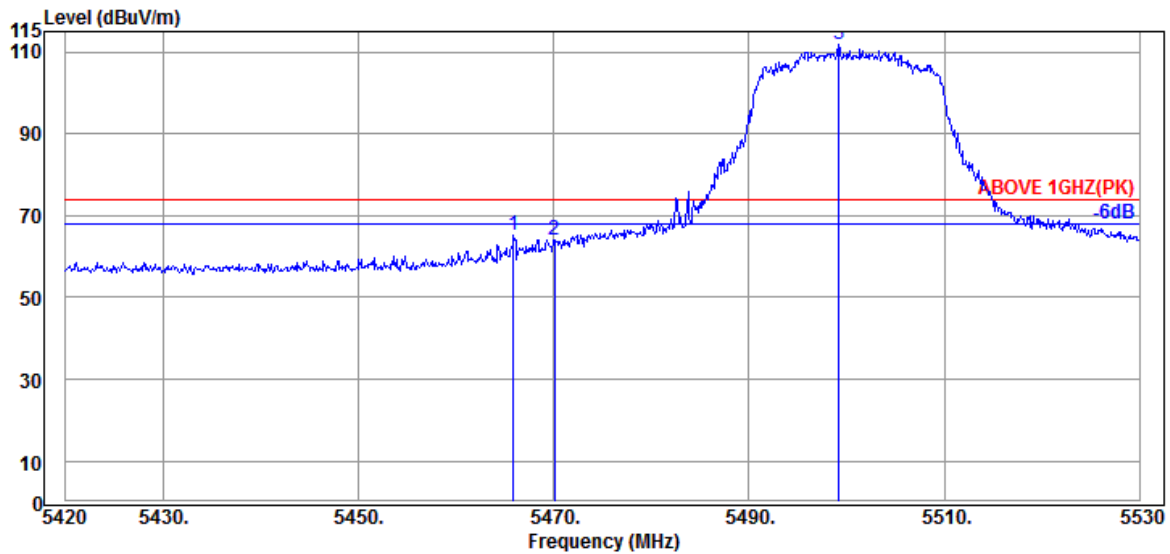

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.870	34.47	9.20	34.24	55.83	65.26	74.00	8.74	Peak
5470.050	34.47	9.20	34.24	54.70	64.13	74.00	9.87	Peak
@ 5499.200	34.40	9.23	34.23	102.53	111.93	---	---	Peak

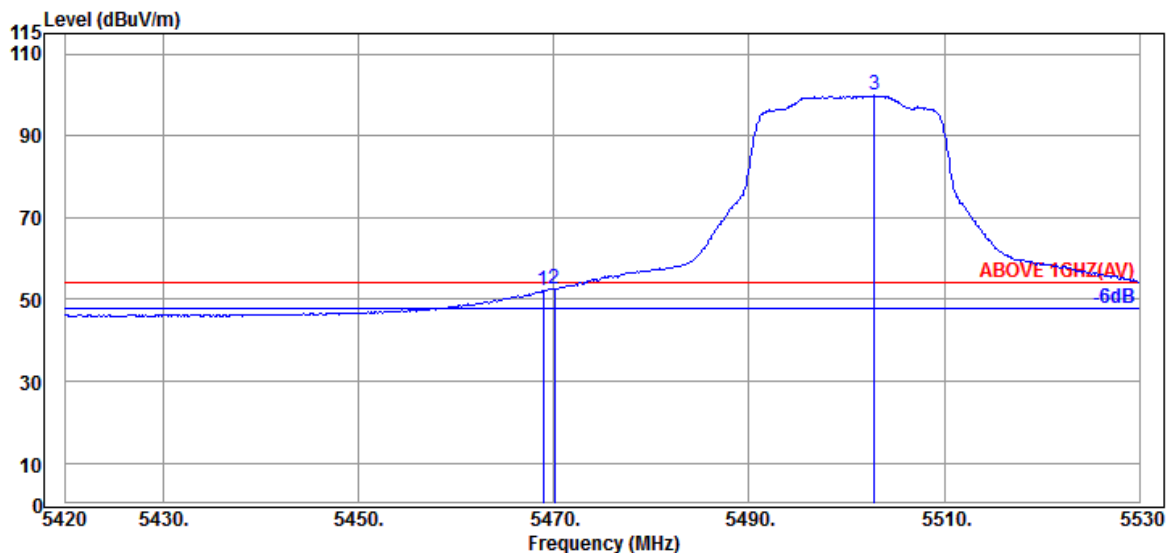

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	9.20	34.24	42.83	52.26	54.00	1.74	Average
5470.050	34.47	9.20	34.24	43.04	52.47	54.00	1.53	Average
@ 5502.830	34.40	9.23	34.24	90.45	99.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

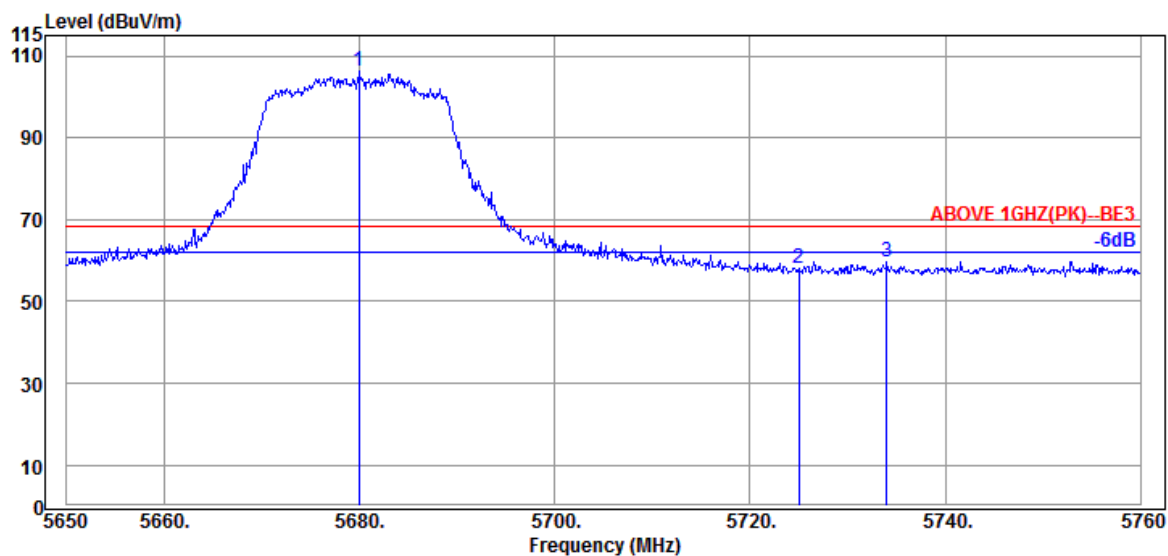

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5679.920	34.40	9.37	34.31	96.80	106.26	---	---	Peak
	5725.020	34.67	9.42	34.32	48.20	57.97	68.20	10.23	Peak
	5734.040	34.67	9.42	34.33	49.99	59.75	68.20	8.45	Peak

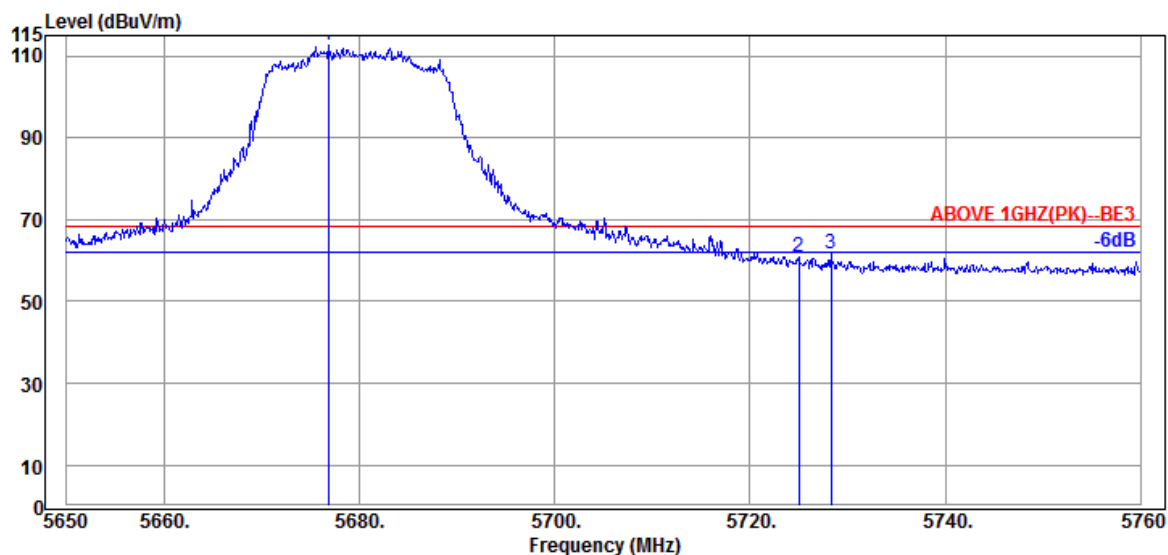

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5676.840	34.40	9.37	34.30	103.08	112.55	---	---	Peak
	5725.020	34.67	9.42	34.32	50.89	60.66	68.20	7.54	Peak
	5728.320	34.67	9.42	34.32	52.01	61.78	68.20	6.42	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

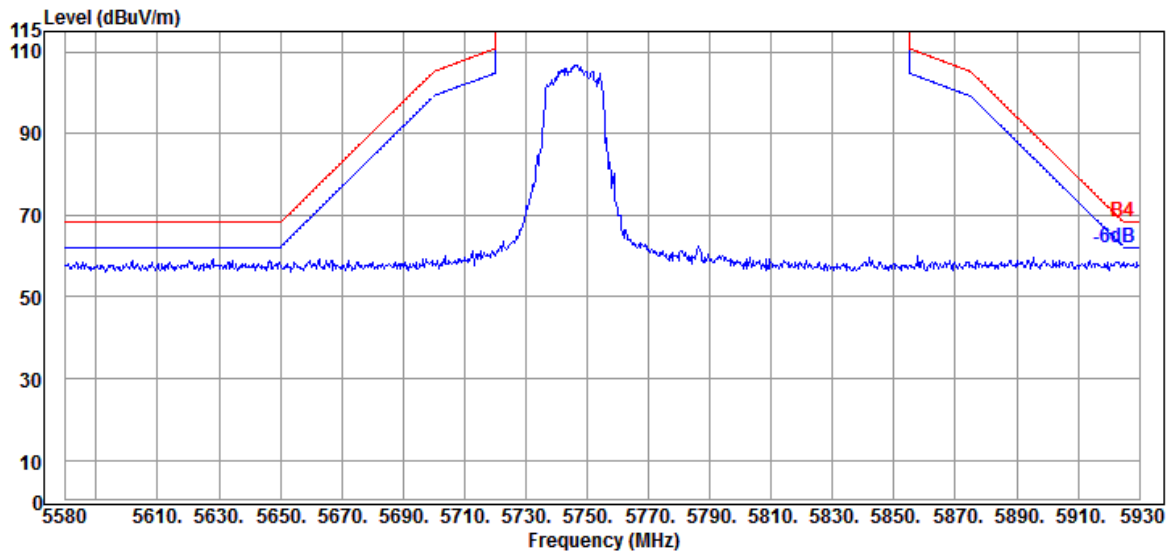

Antenna at Vertical Polarization

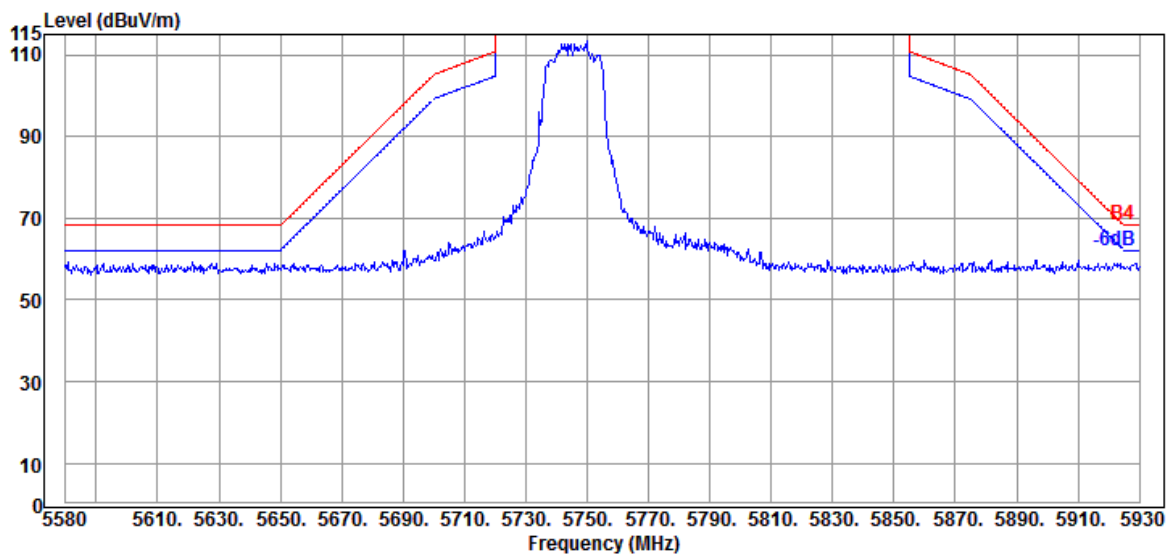


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz

Antenna at Horizontal Polarization

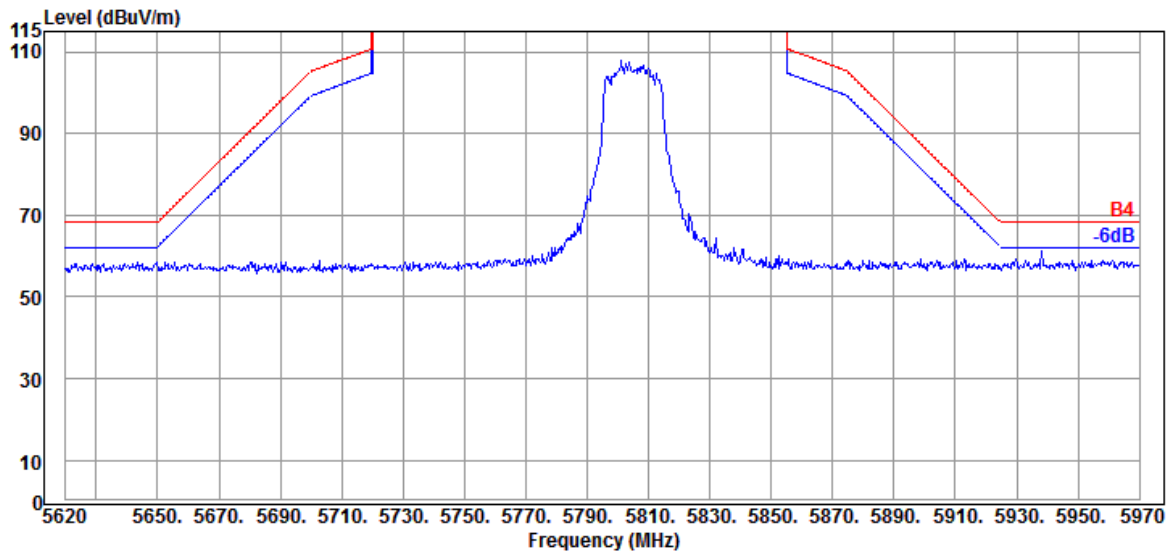

Antenna at Vertical Polarization

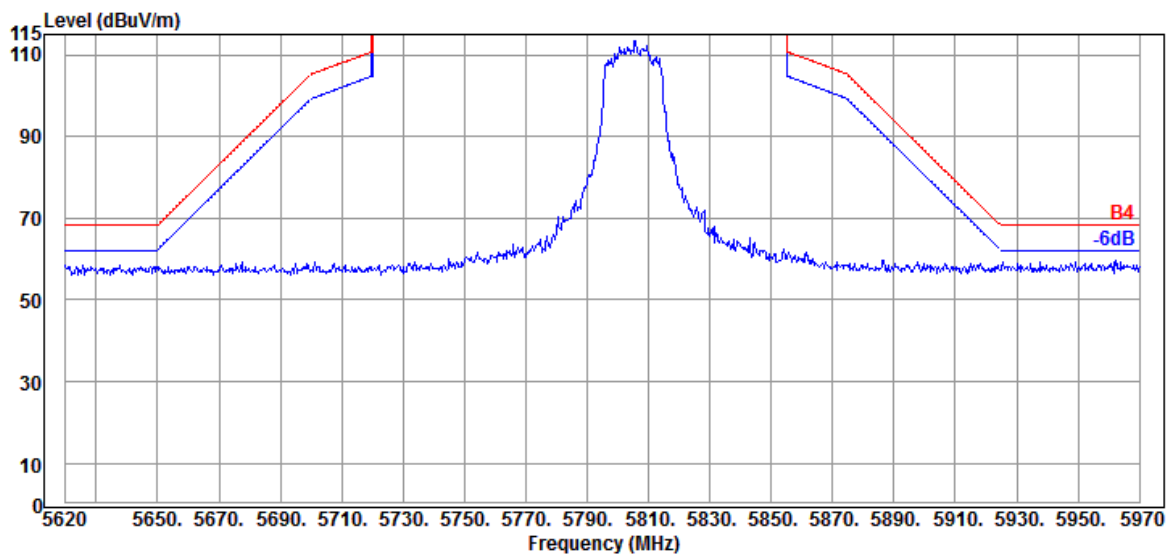

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

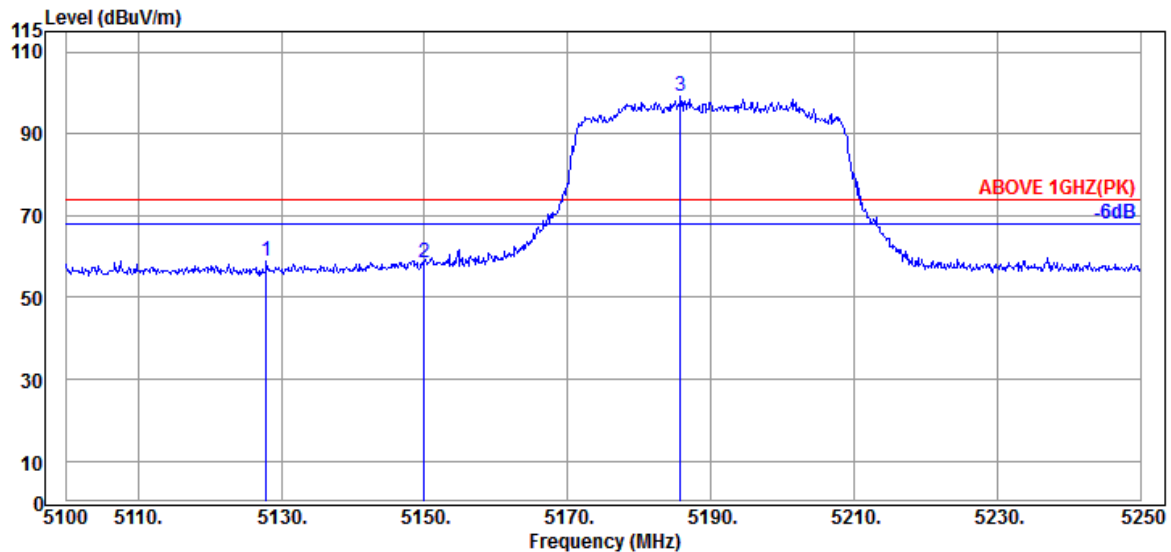

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.900	34.17	8.91	34.36	50.30	59.02	74.00	14.98	Peak
5149.950	34.20	8.92	34.35	49.64	58.41	74.00	15.59	Peak
@ 5185.800	34.20	8.95	34.34	90.28	99.09	---	---	Peak

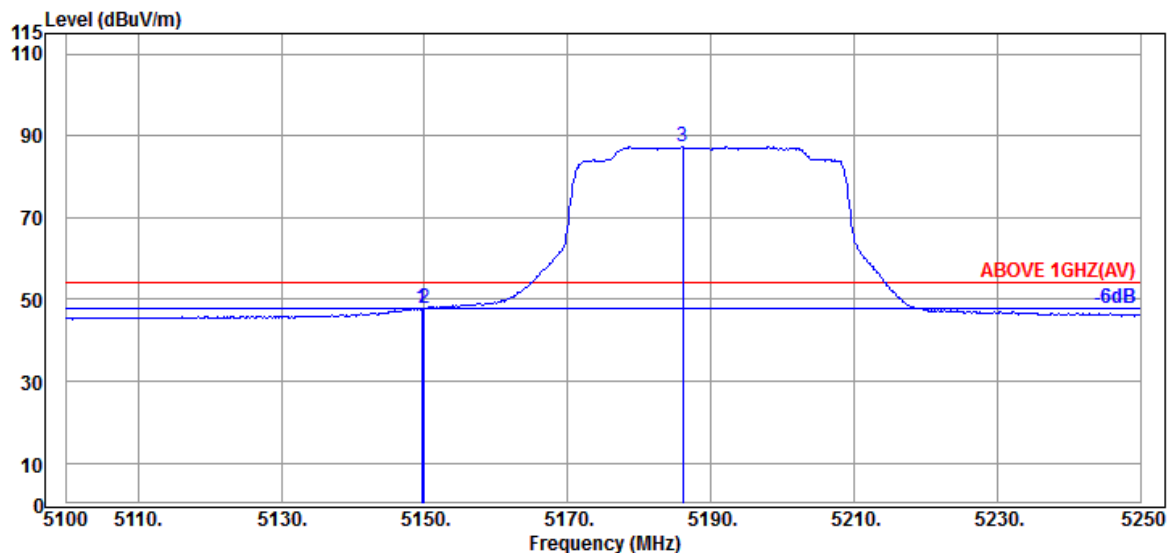

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	8.92	34.35	39.18	47.95	54.00	6.05	Average
5149.950	34.20	8.92	34.35	39.01	47.78	54.00	6.22	Average
@ 5186.100	34.20	8.95	34.34	78.60	87.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

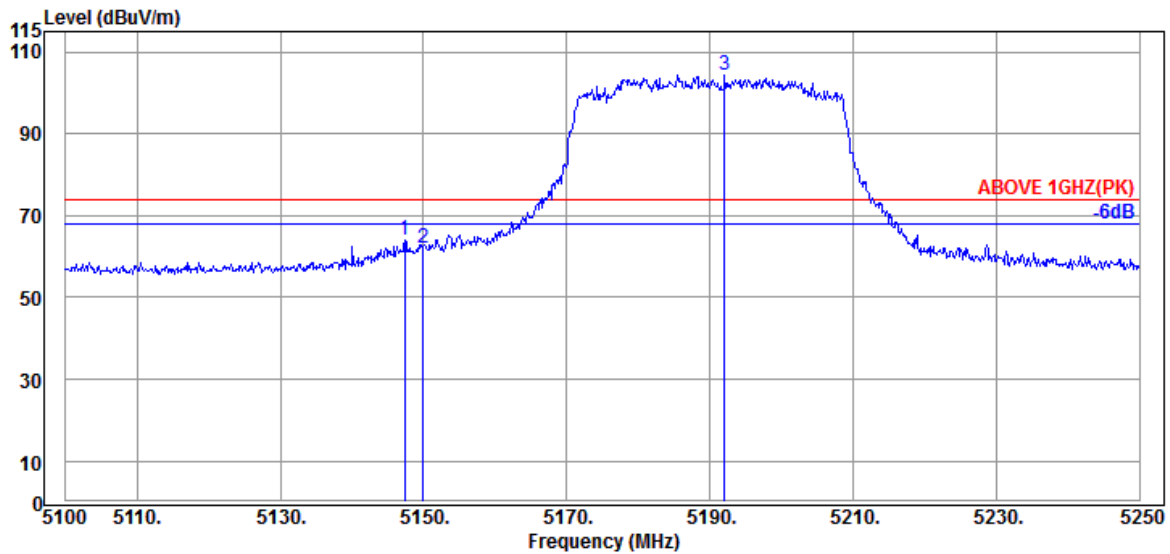

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	34.20	8.92	34.35	55.31	64.08	74.00	9.92	Peak
5149.950	34.20	8.92	34.35	53.44	62.21	74.00	11.79	Peak
@ 5192.100	34.20	8.96	34.34	95.49	104.31	---	---	Peak

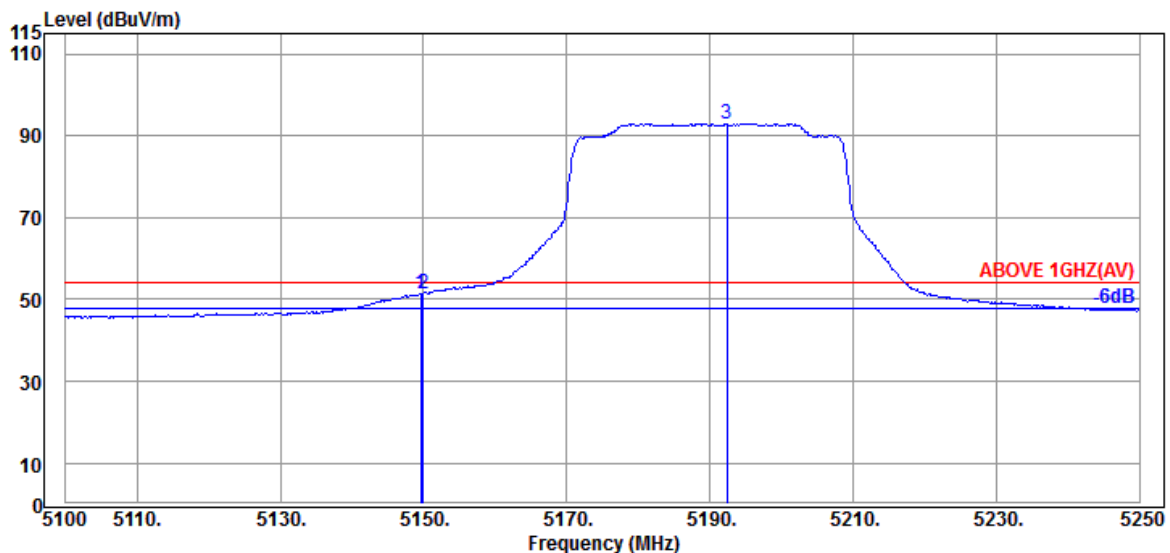

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	8.92	34.35	42.69	51.46	54.00	2.54	Average
5149.950	34.20	8.92	34.35	42.77	51.54	54.00	2.46	Average
@ 5192.400	34.20	8.96	34.34	84.15	92.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

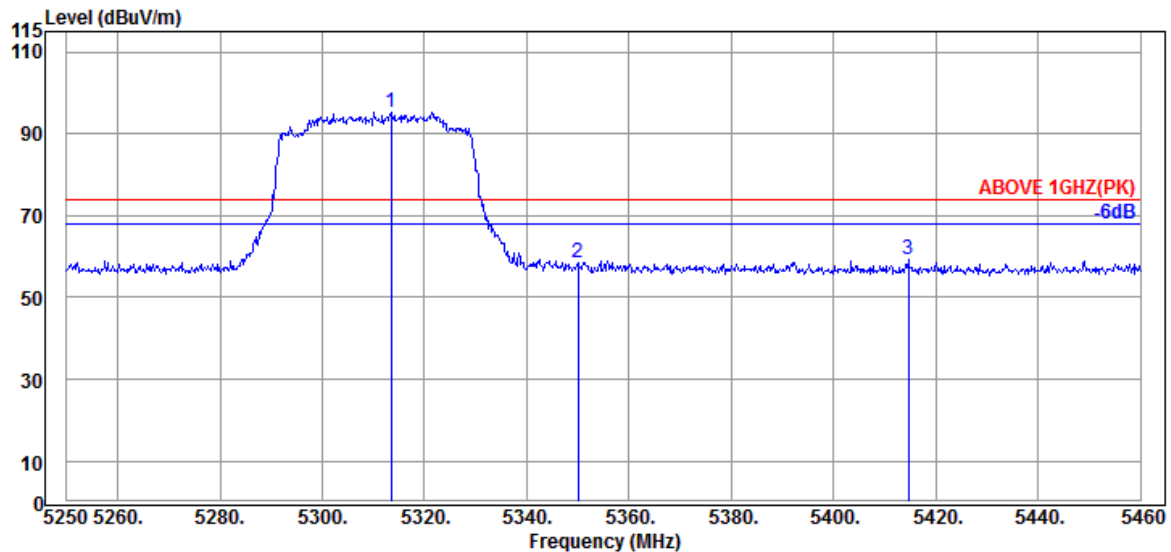

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.420	34.53	9.07	34.29	85.96	95.27	---	---	Peak
5349.960	34.60	9.10	34.27	48.93	58.36	74.00	15.64	Peak
5414.640	34.65	9.15	34.26	49.67	59.21	74.00	14.79	Peak

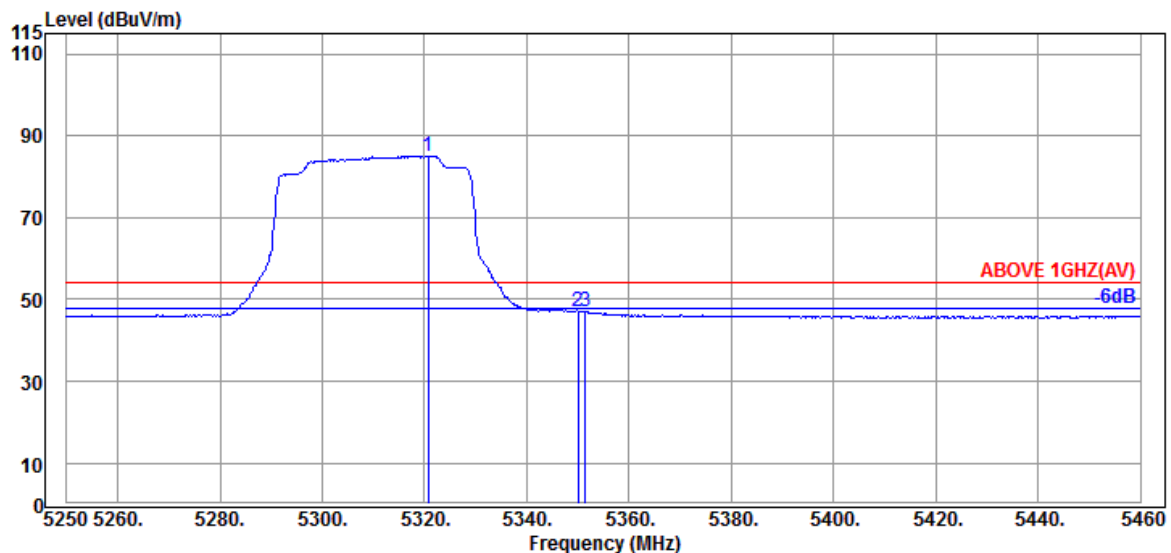

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.770	34.53	9.07	34.29	75.80	85.11	---	---	Average
5349.960	34.60	9.10	34.27	37.66	47.09	54.00	6.91	Average
5351.430	34.60	9.10	34.27	37.64	47.07	54.00	6.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

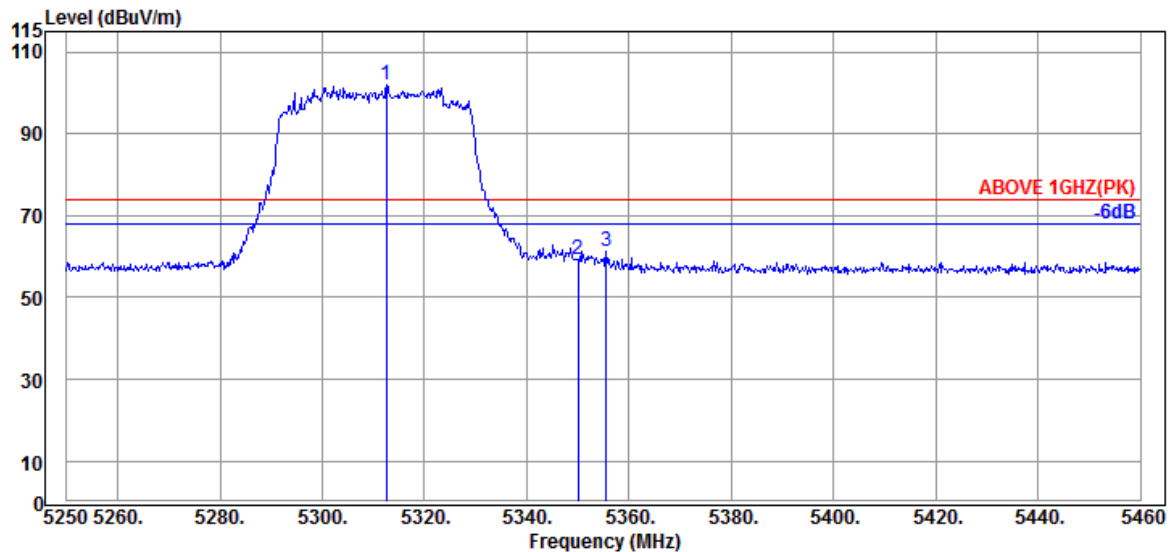

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.580	34.53	9.07	34.29	92.47	101.78	---	---	Peak
5349.960	34.60	9.10	34.27	49.69	59.12	74.00	14.88	Peak
5355.630	34.63	9.10	34.27	51.99	61.45	74.00	12.55	Peak

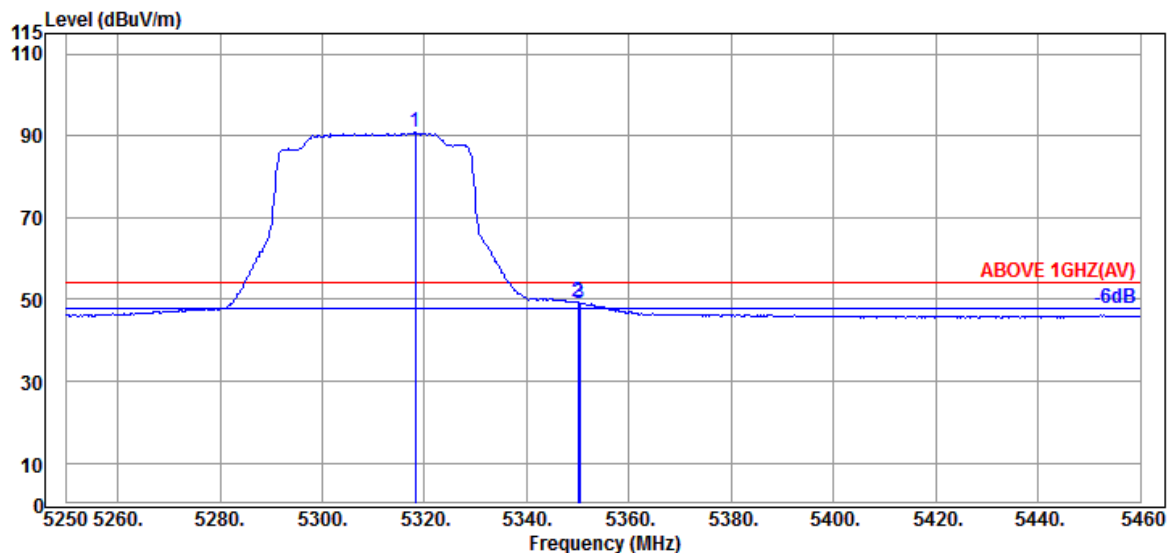

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.250	34.53	9.07	34.29	81.69	91.00	---	---	Average
5349.960	34.60	9.10	34.27	39.88	49.31	54.00	4.69	Average
5350.380	34.60	9.10	34.27	39.60	49.03	54.00	4.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

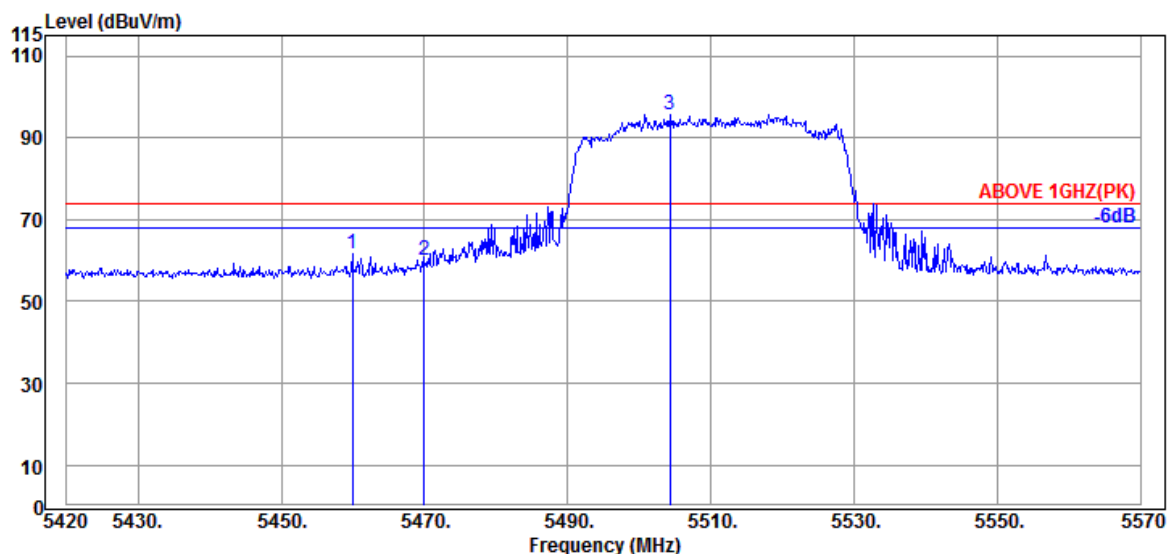

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.50	9.18	34.24	52.33	61.77	74.00	12.23	Peak
5469.950	34.47	9.20	34.24	50.79	60.22	74.00	13.78	Peak
@ 5504.300	34.40	9.23	34.24	86.38	95.77	---	---	Peak

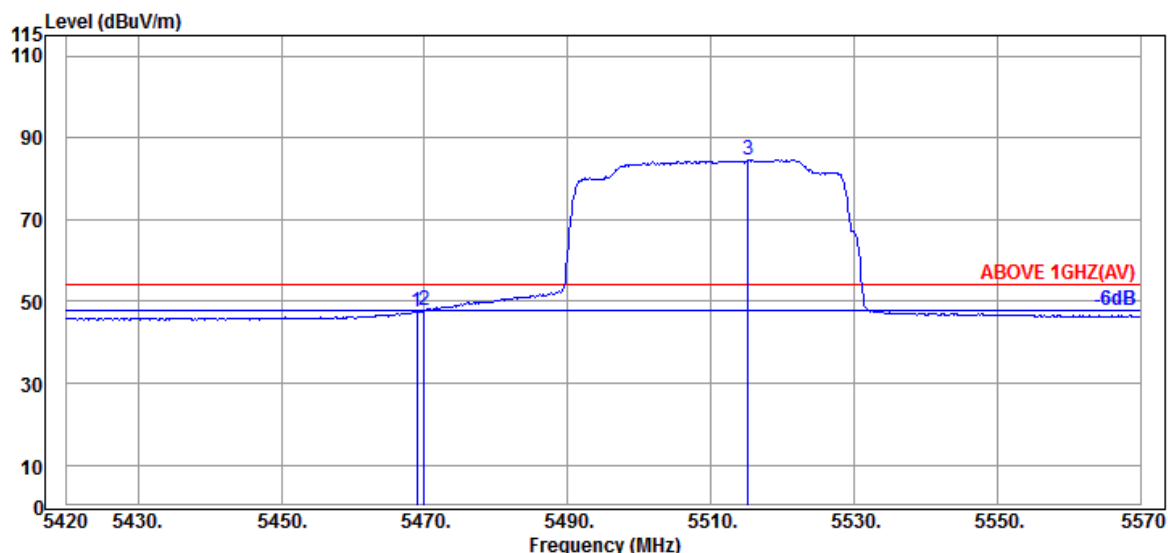

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	9.20	34.24	38.05	47.48	54.00	6.52	Average
5469.950	34.47	9.20	34.24	38.23	47.66	54.00	6.34	Average
@ 5515.250	34.37	9.24	34.24	75.17	84.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

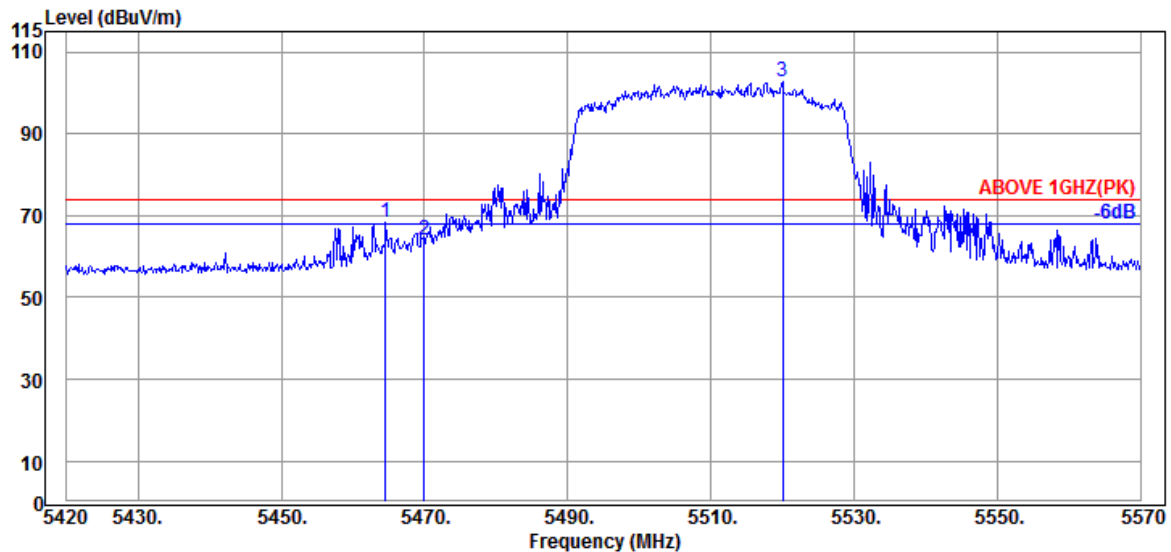

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.550	34.47	9.20	34.24	58.88	68.31	74.00	5.69	Peak
5469.950	34.47	9.20	34.24	54.52	63.95	74.00	10.05	Peak
@ 5520.050	34.37	9.24	34.24	93.30	102.67	---	---	Peak

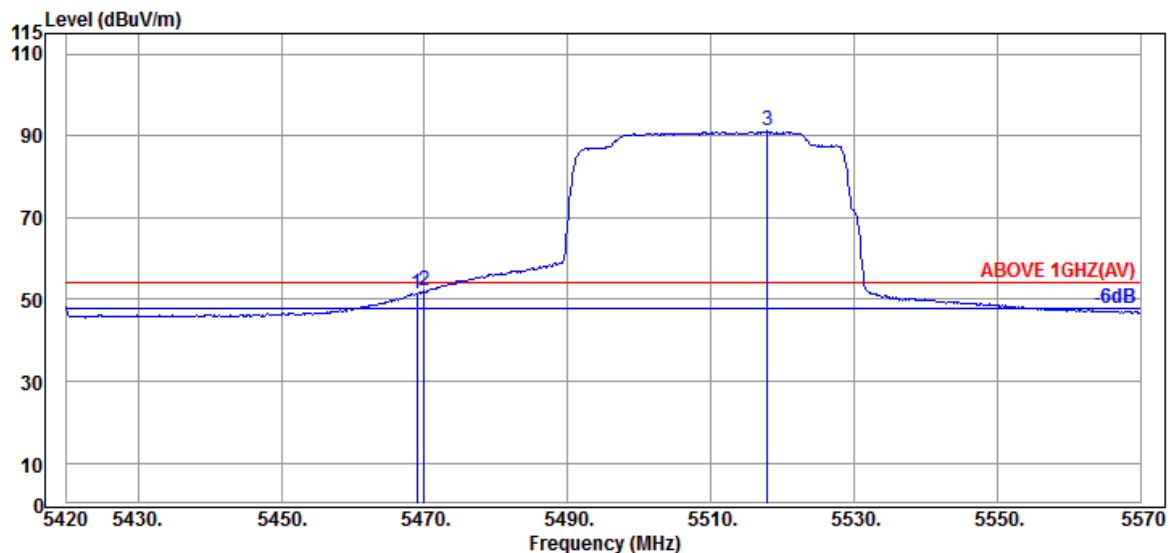

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	9.20	34.24	42.13	51.56	54.00	2.44	Average
5469.950	34.47	9.20	34.24	42.59	52.02	54.00	1.98	Average
@ 5517.950	34.37	9.24	34.24	81.74	91.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

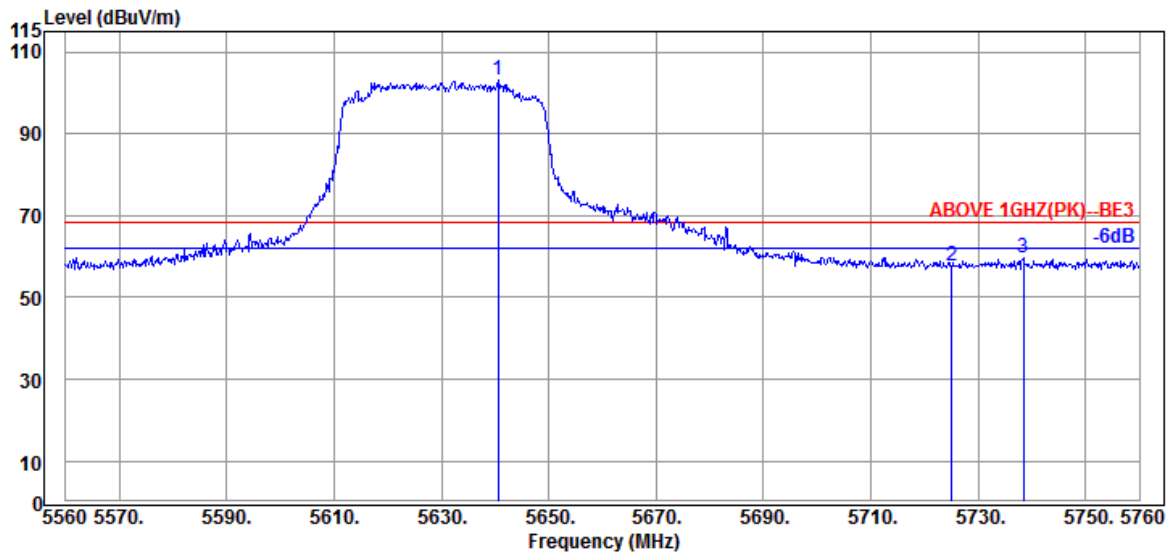

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5640.600	34.40	9.34	34.29	93.87	103.32	---	---	Peak
5725.000	34.67	9.42	34.32	47.83	57.60	68.20	10.60	Peak
5738.400	34.67	9.43	34.33	49.91	59.68	68.20	8.52	Peak

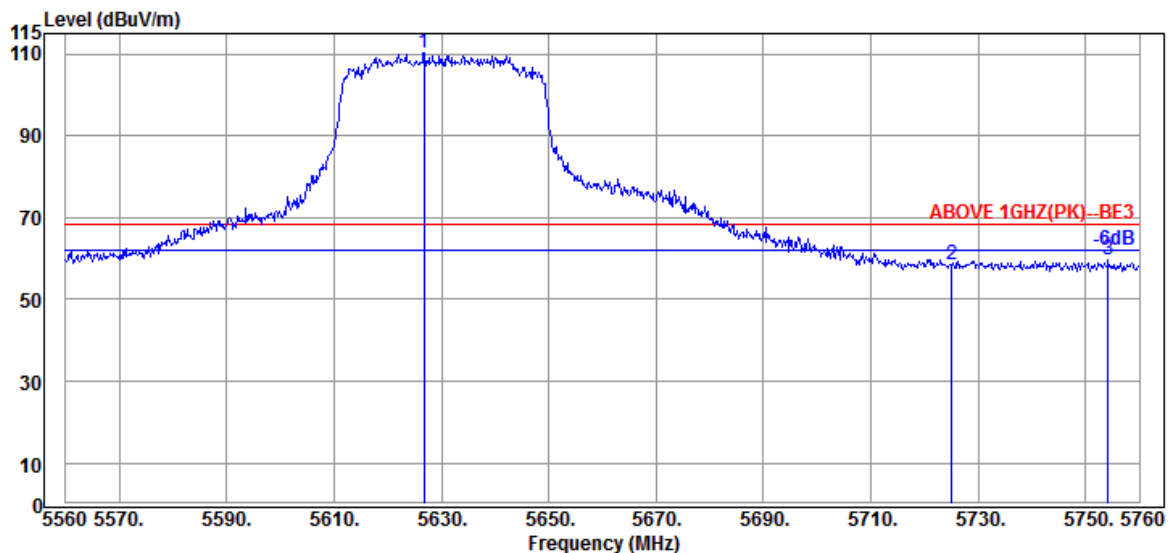

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.800	34.40	9.33	34.28	100.89	110.34	---	---	Peak
5725.000	34.67	9.42	34.32	48.56	58.33	68.20	9.87	Peak
5754.200	34.80	9.45	34.33	49.76	59.68	68.20	8.52	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

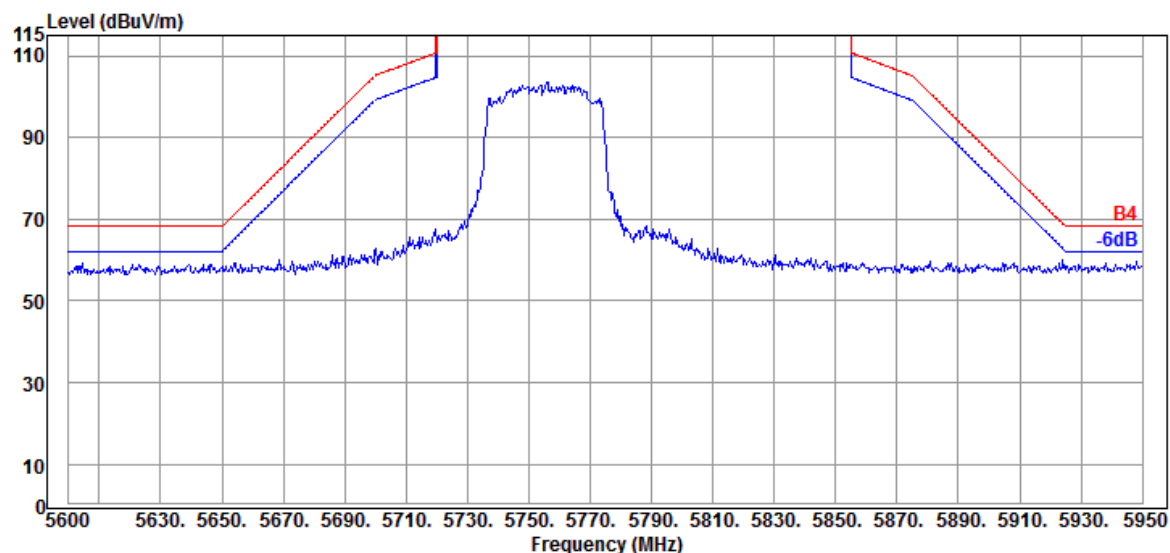

Antenna at Vertical Polarization

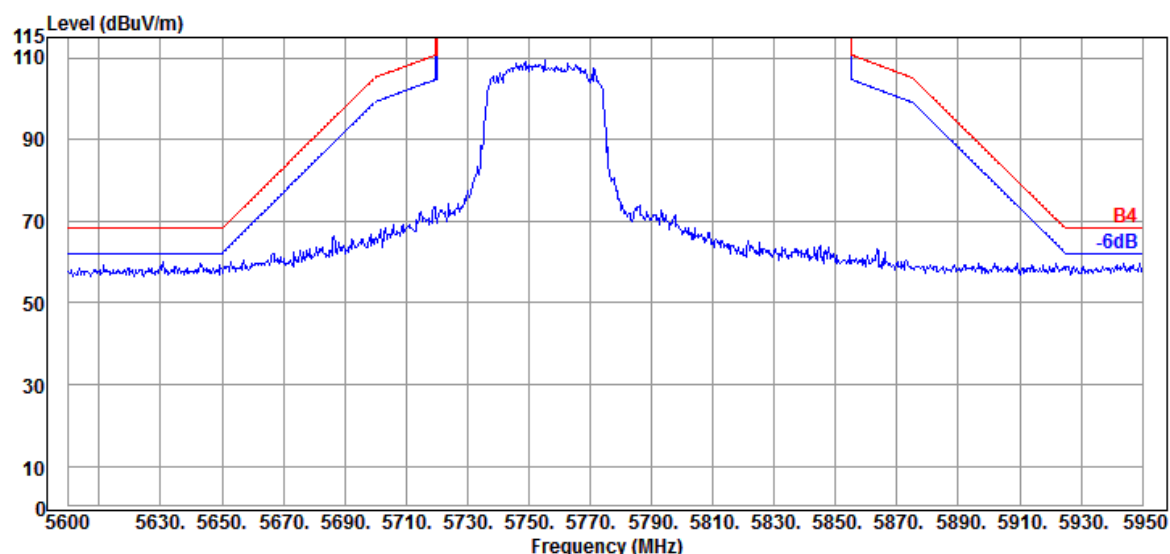

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

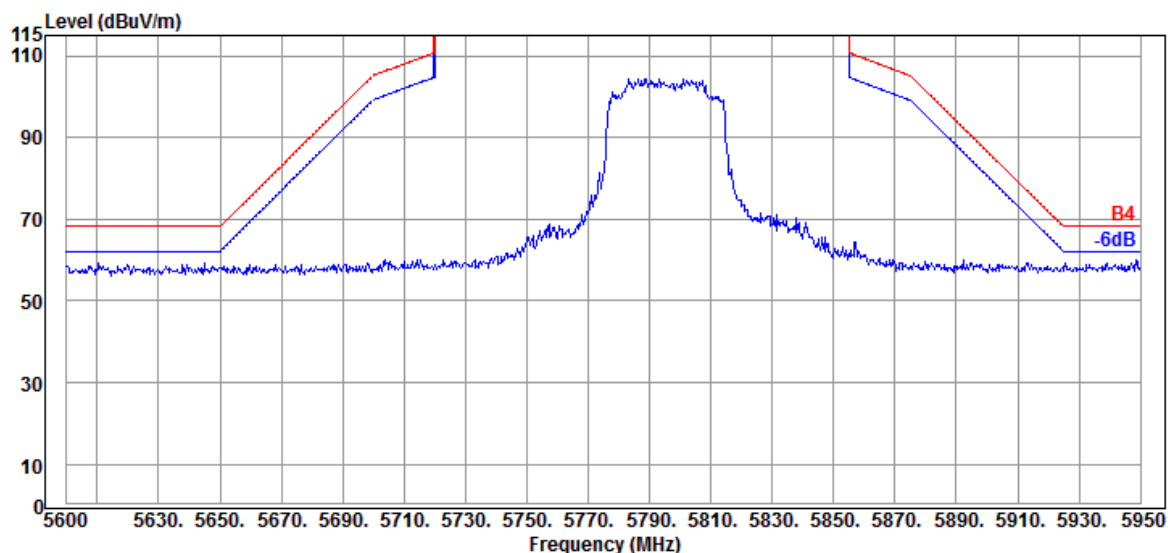

Antenna at Vertical Polarization

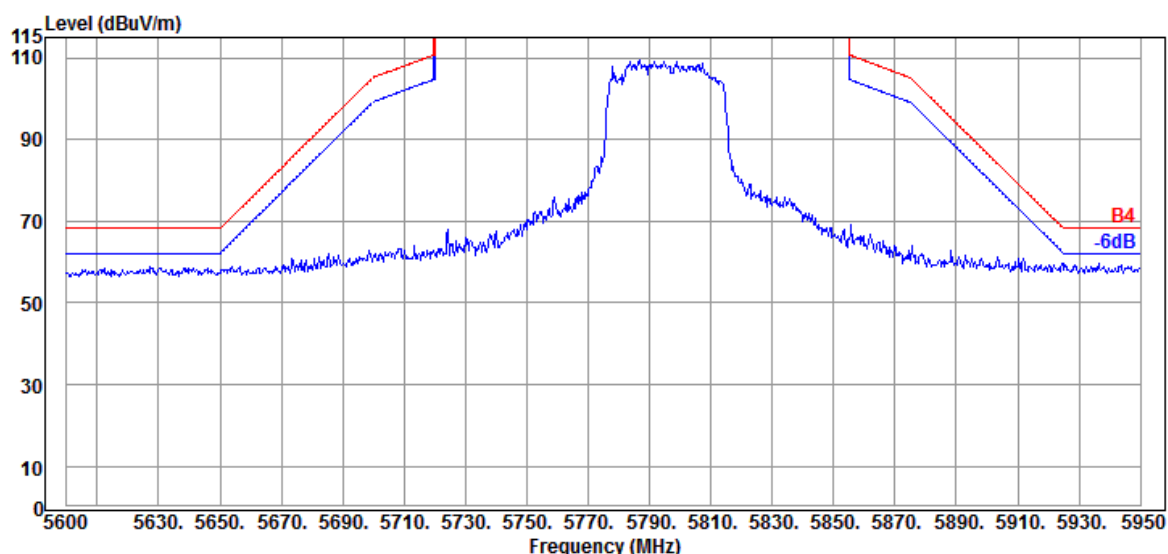

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

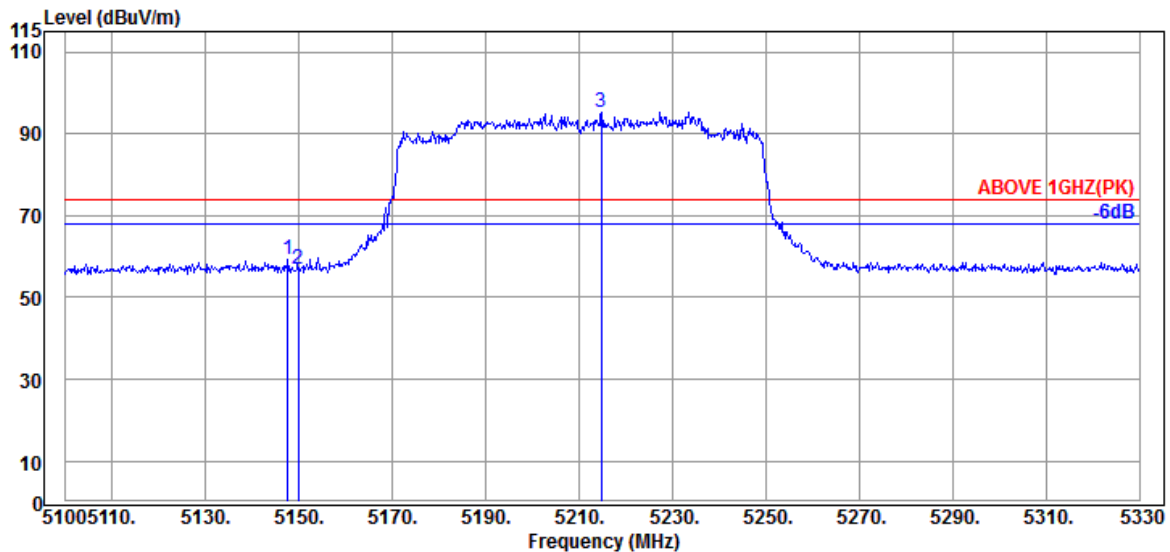

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.610	34.20	8.92	34.35	50.42	59.19	74.00	14.81	Peak
5149.910	34.20	8.92	34.35	48.01	56.78	74.00	17.22	Peak
@ 5214.770	34.25	8.98	34.33	86.37	95.27	---	---	Peak

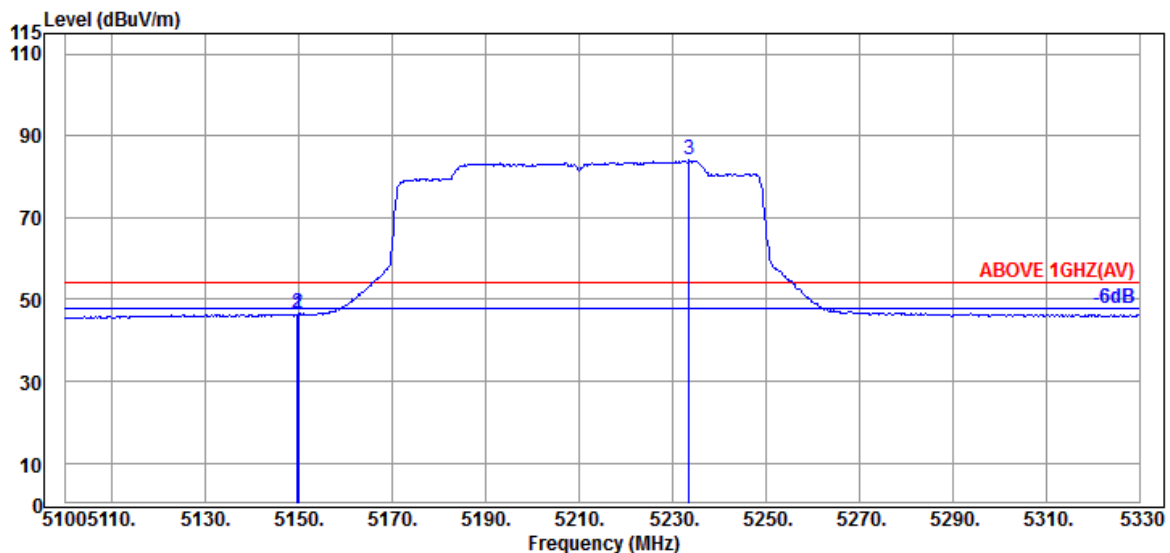

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.20	8.92	34.35	37.56	46.33	54.00	7.67	Average
5149.910	34.20	8.92	34.35	37.69	46.46	54.00	7.54	Average
@ 5233.630	34.35	8.99	34.32	74.98	84.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

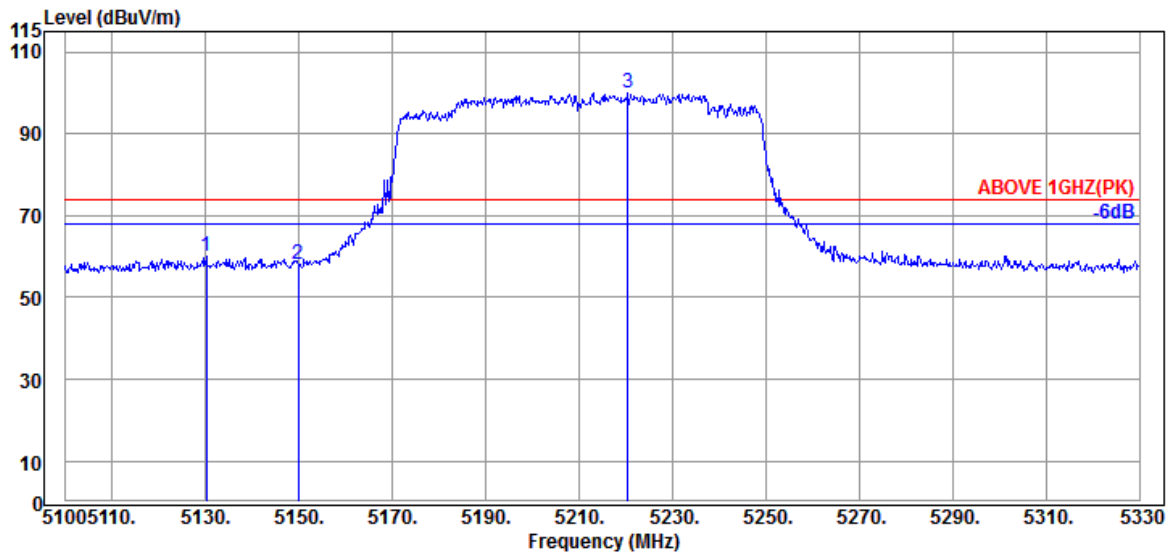

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.130	34.17	8.91	34.36	51.16	59.88	74.00	14.12	Peak
5149.910	34.20	8.92	34.35	49.27	58.04	74.00	15.96	Peak
@ 5220.520	34.30	8.98	34.32	90.92	99.88	---	---	Peak

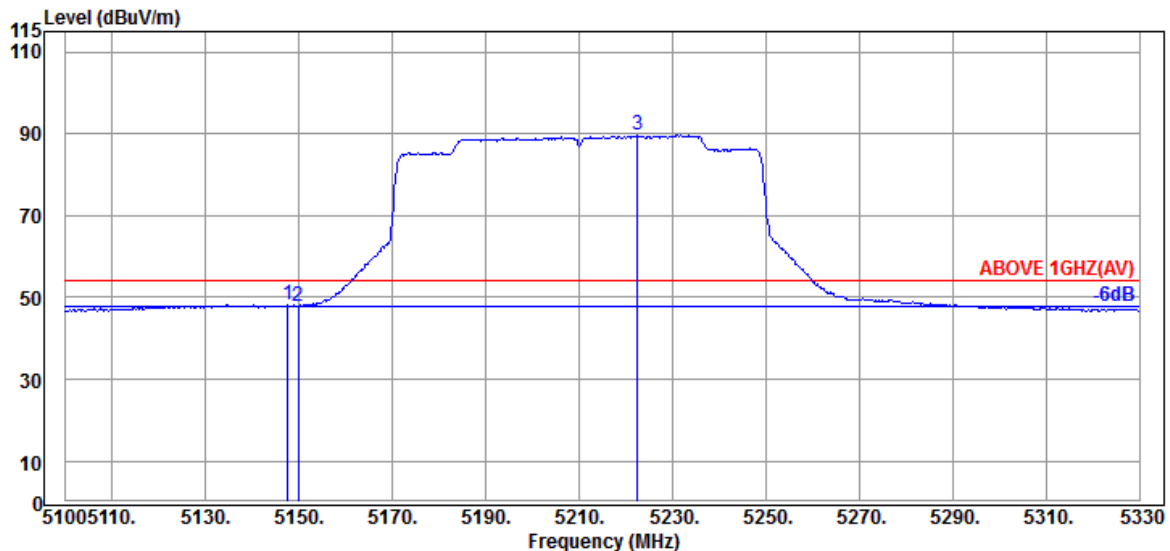

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.610	34.20	8.92	34.35	39.52	48.29	54.00	5.71	Average
5149.910	34.20	8.92	34.35	39.15	47.92	54.00	6.08	Average
@ 5222.590	34.30	8.98	34.32	80.65	89.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

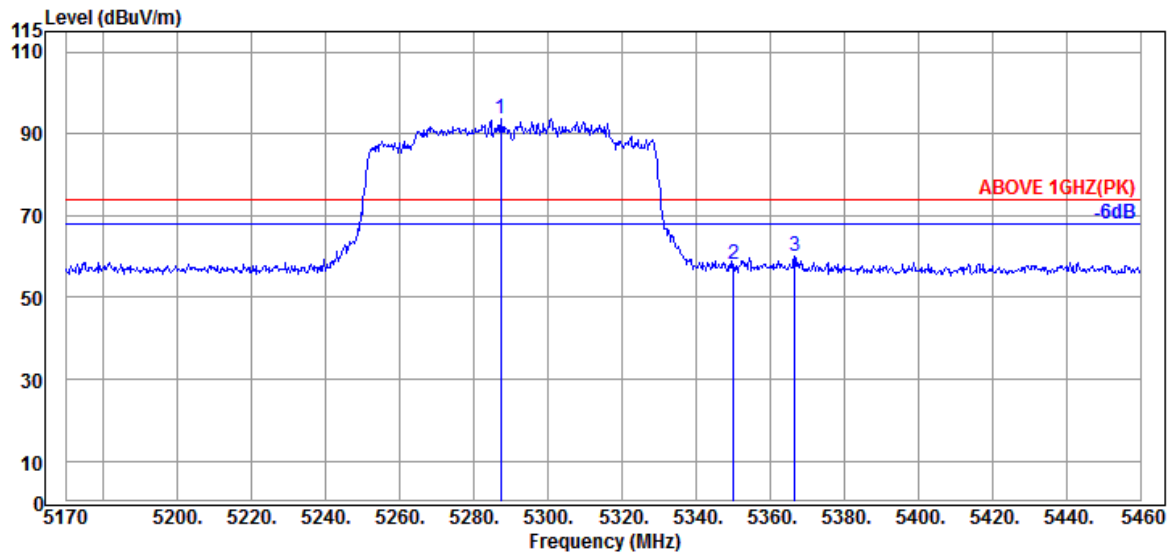

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5287.160	34.47	9.04	34.30	84.50	93.71	---	---	Peak
	5350.090	34.60	9.10	34.27	48.74	58.17	74.00	15.83	Peak
	5366.620	34.63	9.11	34.27	50.56	60.03	74.00	13.97	Peak

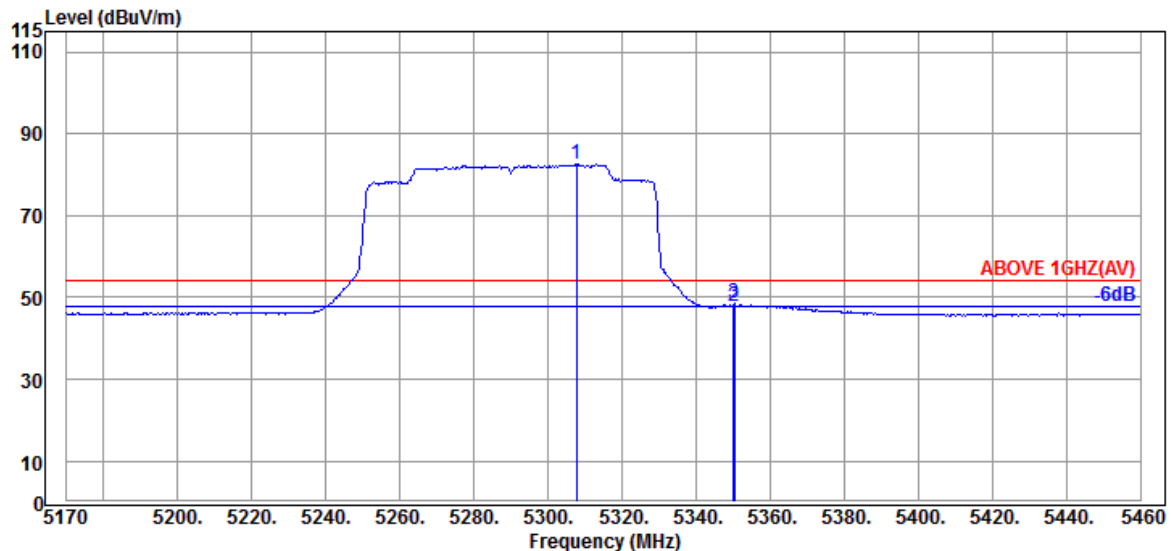

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5307.750	34.50	9.05	34.29	73.32	82.58	---	---	Average
	5350.090	34.60	9.10	34.27	38.38	47.81	54.00	6.19	Average
	5350.380	34.60	9.10	34.27	38.99	48.42	54.00	5.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE160	U-NII Band	1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

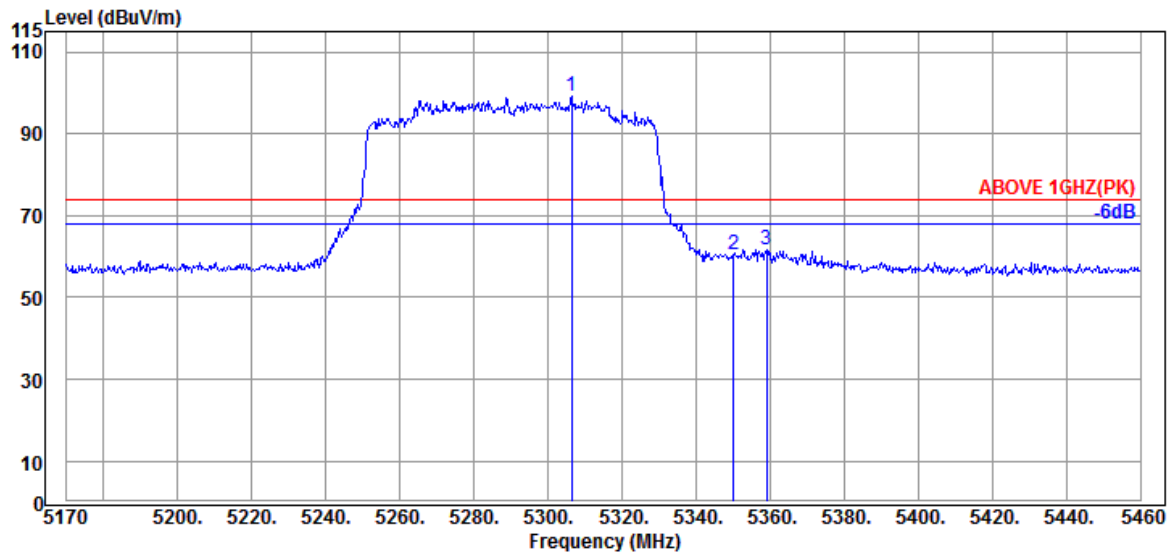

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5306.300	34.50	9.05	34.29	89.97	99.23	---	---	Peak
	5350.090	34.60	9.10	34.27	50.91	60.34	74.00	13.66	Peak
	5359.080	34.63	9.10	34.27	52.25	61.71	74.00	12.29	Peak

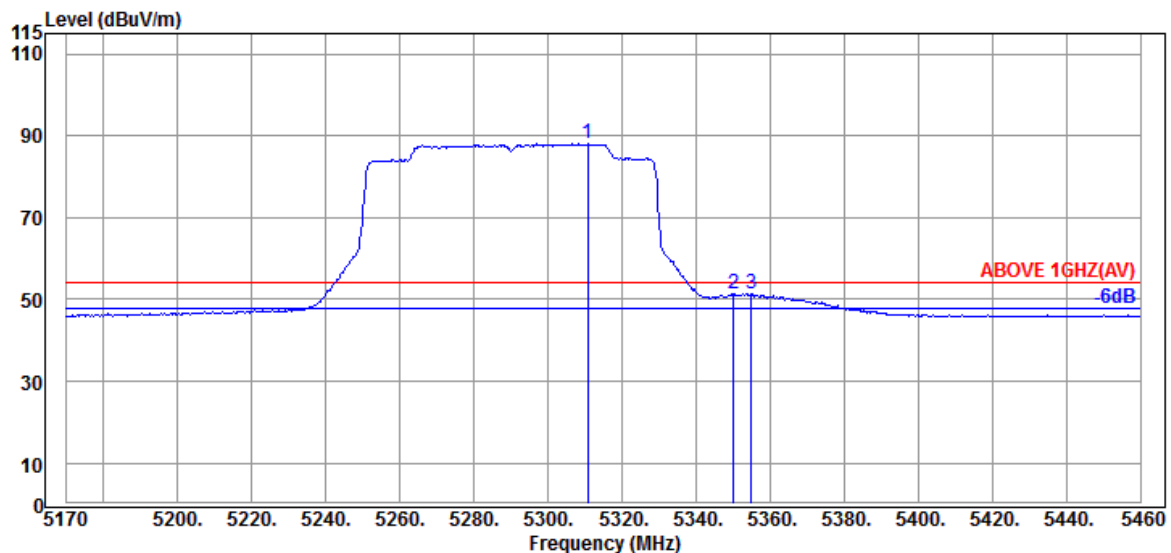

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5310.650	34.53	9.07	34.29	78.68	87.99	---	---	Average
	5350.090	34.60	9.10	34.27	41.81	51.24	54.00	2.76	Average
	5355.020	34.63	9.10	34.27	41.88	51.34	54.00	2.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

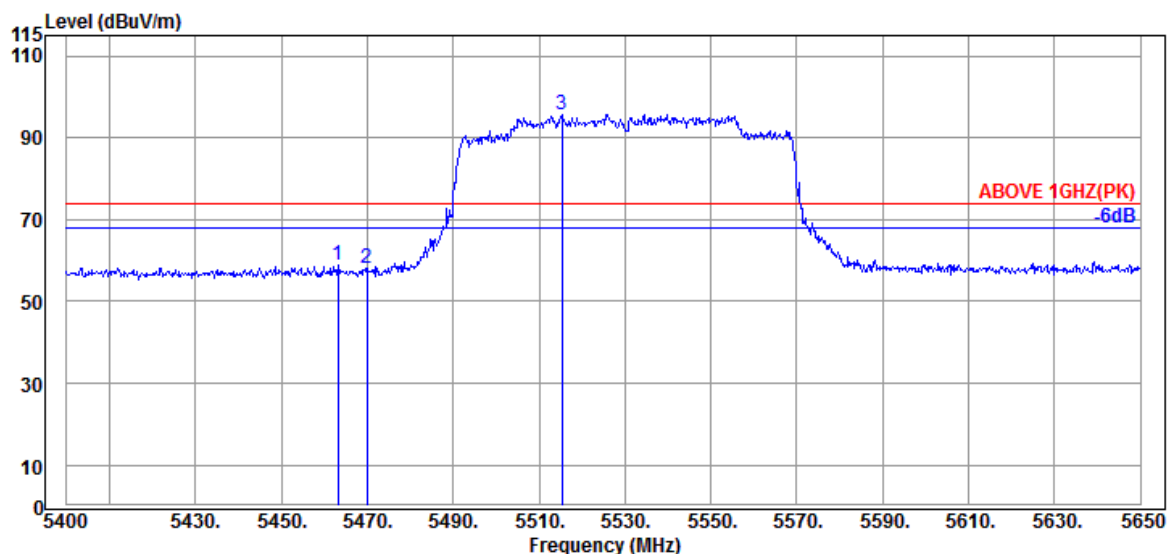

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.250	34.50	9.20	34.24	49.25	58.71	74.00	15.29	Peak
5470.000	34.47	9.20	34.24	48.63	58.06	74.00	15.94	Peak
@ 5515.250	34.37	9.24	34.24	86.42	95.79	---	---	Peak

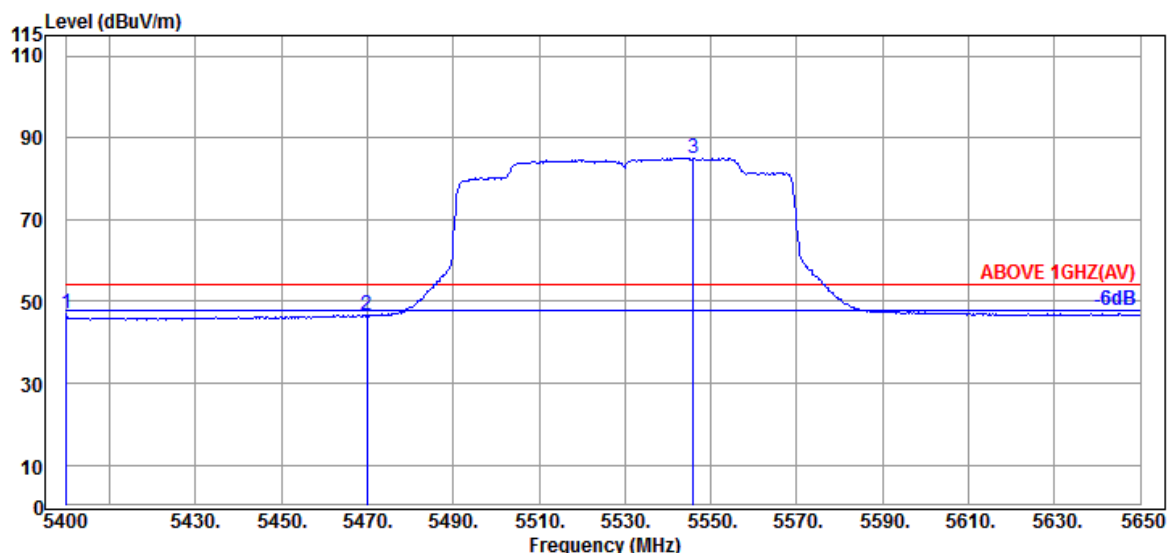

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5400.000	34.70	9.14	34.26	37.40	46.98	54.00	7.02	Average
5470.000	34.47	9.20	34.24	37.07	46.50	54.00	7.50	Average
@ 5546.000	34.30	9.26	34.25	75.81	85.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

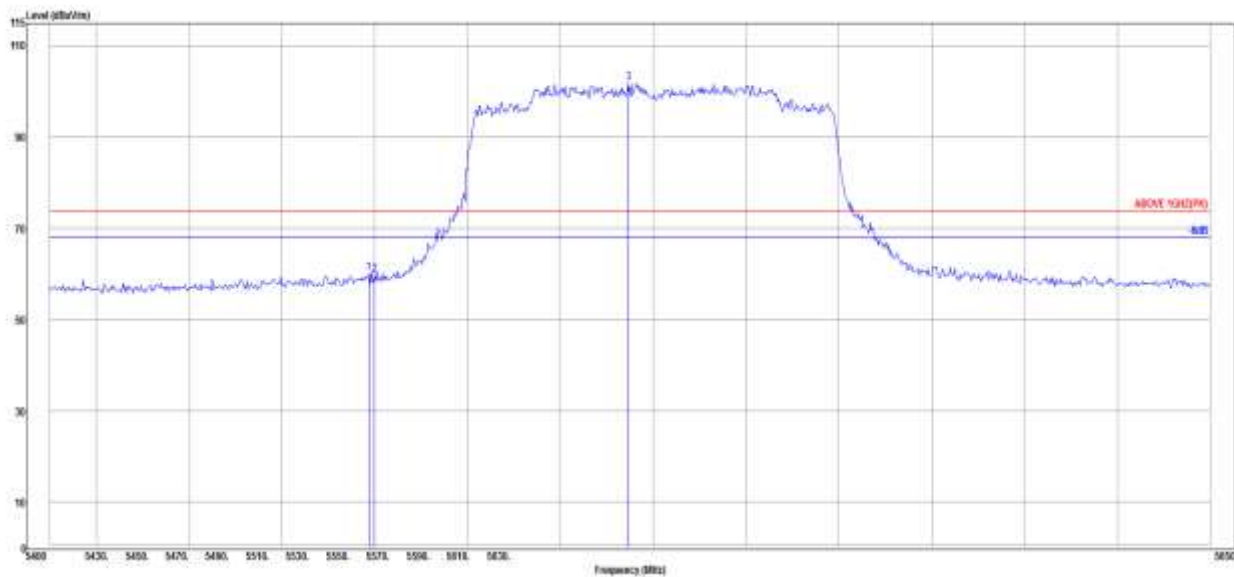

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	9.20	34.24	50.82	60.25	74.00	13.75	Peak
5470.000	34.47	9.20	34.24	50.39	59.82	74.00	14.18	Peak
@ 5524.750	34.37	9.24	34.24	92.50	101.87	---	---	Peak

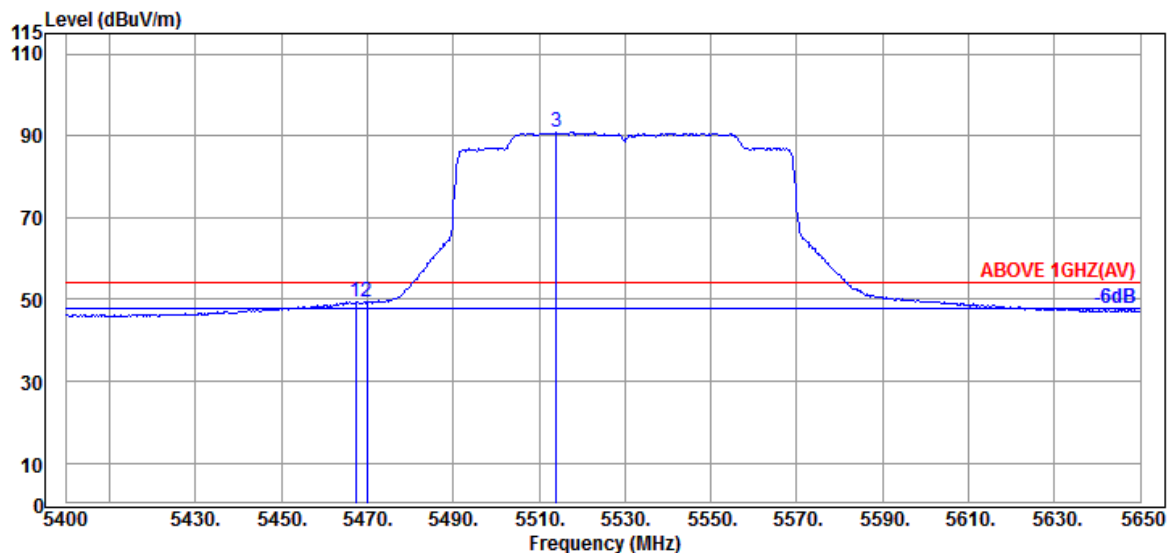

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.47	9.20	34.24	40.16	49.59	54.00	4.41	Average
5470.000	34.47	9.20	34.24	39.78	49.21	54.00	4.79	Average
@ 5514.000	34.37	9.24	34.24	81.55	90.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

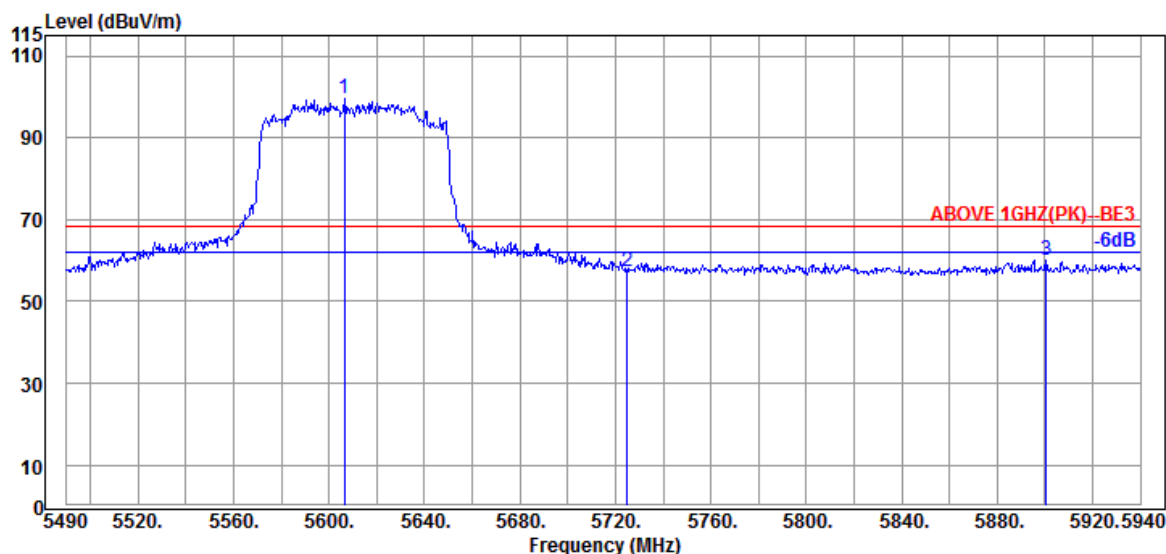

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5606.550	34.40	9.31	34.28	90.19	99.62	---	---	Peak
	5724.900	34.67	9.42	34.32	47.69	57.46	68.20	10.74	Peak
	5900.400	35.40	9.56	34.40	49.42	59.98	68.20	8.22	Peak

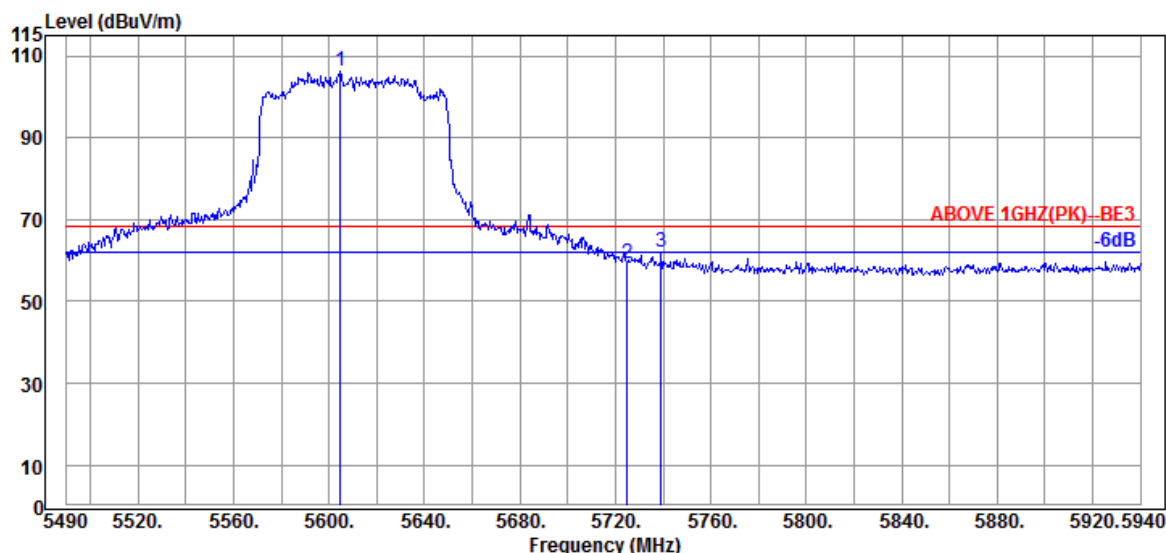

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5604.750	34.40	9.31	34.28	96.75	106.18	---	---	Peak
	5724.900	34.67	9.42	34.32	49.45	59.22	68.20	8.98	Peak
	5739.300	34.80	9.43	34.33	52.09	61.99	68.20	6.21	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2201239

Report Number: EM-F220081

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	13.03	34.78	31.49	47.34	54.00	6.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	13.03	34.78	33.31	49.16	54.00	4.84	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	37.90	13.24	34.66	31.31	47.79	54.00	6.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	37.90	13.24	34.66	30.76	47.24	54.00	6.76	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.55	34.56	31.77	48.86	54.00	5.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.55	34.56	30.80	47.89	54.00	6.11	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	14.21	34.59	29.82	47.84	54.00	6.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	14.21	34.59	31.17	49.19	54.00	4.81	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	14.51	34.62	31.46	49.85	54.00	4.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	14.51	34.62	31.41	49.80	54.00	4.20	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	37.60	13.00	34.83	31.68	47.45	54.00	6.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	37.60	13.00	34.83	31.78	47.55	54.00	6.45	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	13.13	34.69	31.18	47.42	54.00	6.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	13.13	34.69	31.25	47.49	54.00	6.51	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	13.80	34.57	30.82	48.18	54.00	5.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	13.80	34.57	31.22	48.58	54.00	5.42	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	14.21	34.59	31.02	49.04	54.00	4.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	14.21	34.59	29.93	47.95	54.00	6.05	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	14.41	34.61	30.62	48.89	54.00	5.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	14.41	34.61	31.52	49.79	54.00	4.21	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	13.07	34.74	31.31	47.34	54.00	6.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	13.07	34.74	31.05	47.08	54.00	6.92	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	13.15	34.68	30.86	47.16	54.00	6.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	13.15	34.68	30.79	47.09	54.00	6.91	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.00	13.70	34.57	30.72	47.85	54.00	6.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.00	13.70	34.57	30.52	47.65	54.00	6.35	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	14.18	34.59	29.57	47.56	54.00	6.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	14.18	34.59	29.70	47.69	54.00	6.31	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	14.43	34.61	31.14	49.46	54.00	4.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	14.43	34.61	31.60	49.92	54.00	4.08	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	13.04	34.78	32.07	47.98	54.00	6.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	13.04	34.78	32.37	48.28	54.00	5.72	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	13.19	34.67	30.26	46.65	54.00	7.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	13.19	34.67	30.89	47.28	54.00	6.72	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	13.88	34.57	30.91	48.42	54.00	5.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	13.88	34.57	30.08	47.59	54.00	6.41	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	14.13	34.58	30.17	48.05	54.00	5.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	14.13	34.58	29.87	47.75	54.00	6.25	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	14.38	34.60	30.44	48.65	54.00	5.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	14.38	34.60	30.63	48.84	54.00	5.16	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	13.12	34.69	30.92	47.15	54.00	6.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	13.12	34.69	31.75	47.98	54.00	6.02	Peak

Mode	802.11ac-VHT160	U-NII Band	3
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	13.75	34.57	31.00	48.25	54.00	5.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	13.75	34.57	30.70	47.95	54.00	6.05	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	13.10	34.71	32.38	48.52	54.00	5.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	13.10	34.71	31.57	47.71	54.00	6.29	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	13.21	34.67	30.91	47.35	54.00	6.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	13.21	34.67	31.29	47.73	54.00	6.27	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.55	34.56	30.42	47.51	54.00	6.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.55	34.56	30.93	48.02	54.00	5.98	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	14.21	34.59	31.27	49.29	54.00	4.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	14.21	34.59	30.40	48.42	54.00	5.58	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	14.41	34.61	30.52	48.79	54.00	5.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	14.41	34.61	30.93	49.20	54.00	4.80	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	13.07	34.74	31.96	47.99	54.00	6.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	13.07	34.74	31.35	47.38	54.00	6.62	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	13.15	34.68	30.58	46.88	54.00	7.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	13.15	34.68	30.49	46.79	54.00	7.21	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	14.06	34.58	31.70	49.45	54.00	4.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	14.06	34.58	31.80	49.55	54.00	4.45	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	14.18	34.59	30.12	48.11	54.00	5.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	14.18	34.59	30.76	48.75	54.00	5.25	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	14.43	34.61	31.15	49.47	54.00	4.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	14.43	34.61	31.05	49.37	54.00	4.63	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	13.04	34.78	30.88	46.79	54.00	7.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	13.04	34.78	31.40	47.31	54.00	6.69	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	13.19	34.67	30.59	46.98	54.00	7.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	13.19	34.67	31.07	47.46	54.00	6.54	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	13.88	34.57	30.58	48.09	54.00	5.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	13.88	34.57	31.08	48.59	54.00	5.41	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	14.13	34.58	29.82	47.70	54.00	6.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	14.13	34.58	29.63	47.51	54.00	6.49	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	14.38	34.60	31.42	49.63	54.00	4.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	14.38	34.60	30.79	49.00	54.00	5.00	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	13.12	34.69	31.68	47.91	54.00	6.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	13.12	34.69	30.72	46.95	54.00	7.05	Peak

Mode	802.11ax-HE160	U-NII Band	3
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	13.75	34.57	31.17	48.42	54.00	5.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	13.75	34.57	30.35	47.60	54.00	6.40	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.