

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	121
A.2.3 Emissions in Non-restricted Frequency Bands.....	136
A.3 26dB/6dB BANDWIDTH	137
A.3.1 26dB/6dB Bandwidth Result	137
A.3.2 Measurement Plots	142
A.4 MAXIMUM OUTPUT POWER	162
A.4.1 Average Output Power	162
A.4.2 Measurement Plots	169
A.5 CONDUCTED BAND EDGES	180
A.6 POWER SPECTRAL DENSITY	185
A.6.1 Power Spectral Density Result	185
A.6.2 Measurement Plots	189
A.7 FREQUENCY STABILITY	208
A.7.1 Frequency stability Result	208

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

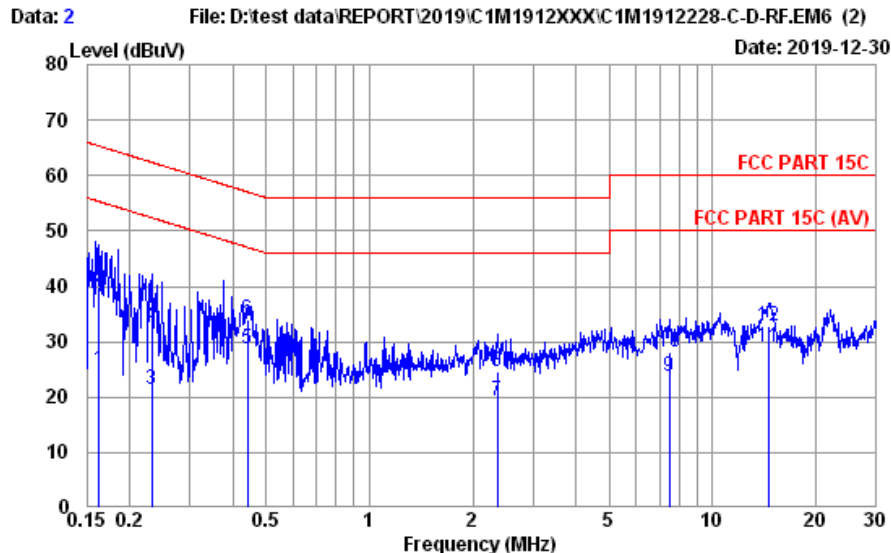

Site no. : No.8 Shielded Room Data no. : 2
Condition : ENV4200 (169) (A) LISN Phase : NEUTRAL
Limit : FCC PART 15C
Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z995
Power Rating : 120Vac/60Hz
Test Mode : Operating


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.72	0.04	9.86	4.20	24.82	55.34	30.52	Average
2	0.162	10.72	0.04	9.86	19.21	39.83	65.34	25.51	QP
3	0.232	10.62	0.04	9.86	0.84	21.36	52.39	31.03	Average
4	0.232	10.62	0.04	9.86	12.31	32.83	62.39	29.56	QP
5	0.442	10.52	0.04	9.86	8.31	28.73	47.02	18.29	Average
6	0.442	10.52	0.04	9.86	13.45	33.87	57.02	23.15	QP
7	2.358	10.57	0.07	9.86	-1.23	19.27	46.00	26.73	Average
8	2.358	10.57	0.07	9.86	4.10	24.60	56.00	31.40	QP
9	7.486	11.19	0.13	9.88	2.63	23.83	50.00	26.17	Average
10	7.486	11.19	0.13	9.88	6.80	28.00	60.00	32.00	QP
11	14.594	12.63	0.16	9.92	6.28	28.99	50.00	21.01	Average
12	14.594	12.63	0.16	9.92	10.10	32.81	60.00	27.19	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

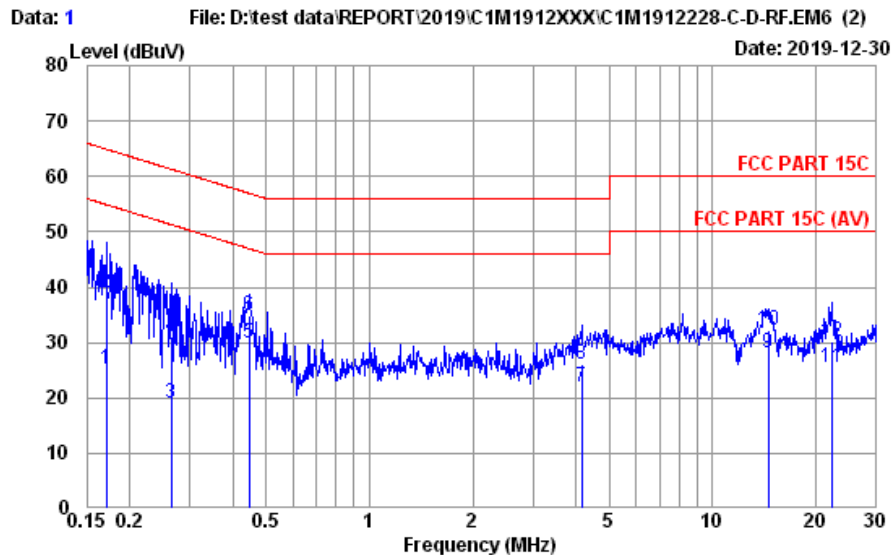

Site no. : No.8 Shielded Room Data no. : 1
Condition : ENV4200 (169) (A) LISN Phase : LINE
Limit : FCC PART 15C
Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z995
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.171	10.65	0.04	9.86	4.61	25.16	54.90	29.74	Average
2	0.171	10.65	0.04	9.86	18.32	38.87	64.90	26.03	QP
3	0.264	10.56	0.04	9.86	-1.55	18.91	51.29	32.38	Average
4	0.264	10.56	0.04	9.86	10.56	31.02	61.29	30.27	QP
5	0.447	10.49	0.04	9.86	9.46	29.85	46.93	17.08	Average
6	0.447	10.49	0.04	9.86	14.39	34.78	56.93	22.15	QP
7	4.158	10.63	0.09	9.87	1.40	21.99	46.00	24.01	Average
8	4.158	10.63	0.09	9.87	5.38	25.97	56.00	30.03	QP
9	14.517	12.29	0.16	9.92	5.90	28.27	50.00	21.73	Average
10	14.517	12.29	0.16	9.92	9.98	32.35	60.00	27.65	QP
11	22.180	13.89	0.20	9.96	1.43	25.48	50.00	24.52	Average
12	22.180	13.89	0.20	9.96	6.09	30.14	60.00	29.86	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

A.2 RADIATED EMISSION

Test Date	2019/12/26~30	Temp./Hum.	22°C/56~58%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sean Wang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	UNII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
47.46	15.90	1.52	8.39	25.81	40.00	14.19	Peak
93.05	16.05	2.20	6.26	24.51	43.50	18.99	Peak
236.61	18.18	3.81	7.13	29.12	46.00	16.88	Peak
578.05	24.56	6.85	2.28	33.69	46.00	12.31	Peak
916.58	27.44	8.55	2.19	38.18	46.00	7.82	Peak
998.06	28.04	9.03	3.13	40.20	54.00	13.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	25.03	1.21	7.97	34.21	40.00	5.79	Peak
53.28	13.98	1.62	20.97	36.57	40.00	3.43	Peak
95.96	16.65	2.24	8.91	27.80	43.50	15.70	Peak
177.44	15.53	3.20	12.95	31.68	43.50	11.82	Peak
499.48	23.70	6.75	3.98	34.43	46.00	11.57	Peak
999.03	28.07	9.03	10.72	47.82	54.00	6.18	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

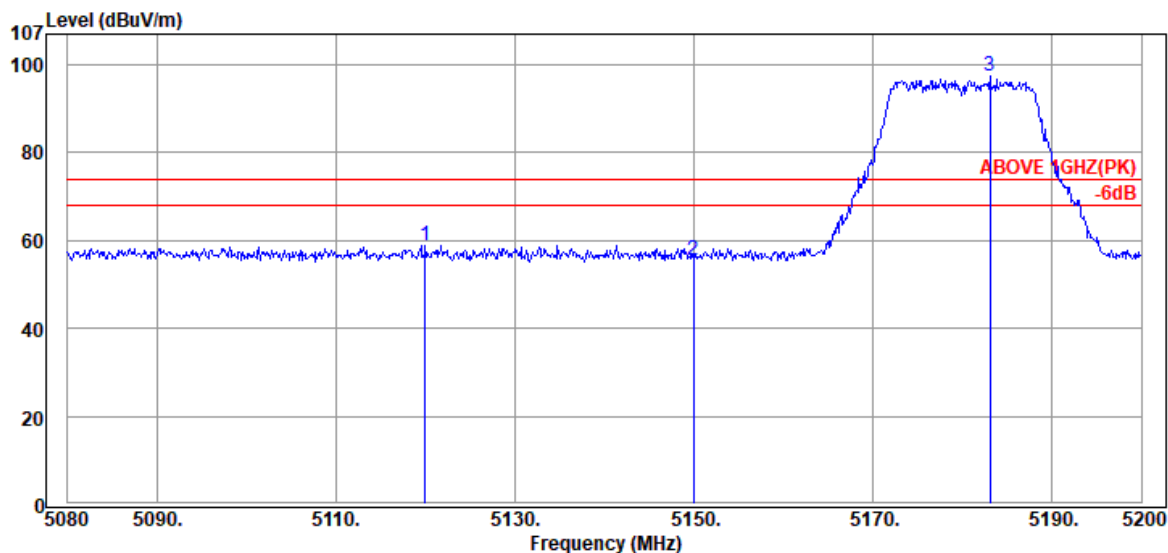

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.96	33.84	8.71	16.26	58.81	74.00	15.19	Peak
5149.96	33.90	8.73	12.77	55.40	74.00	18.60	Peak
@ 5183.08	34.03	8.75	54.51	97.29	---	---	Peak

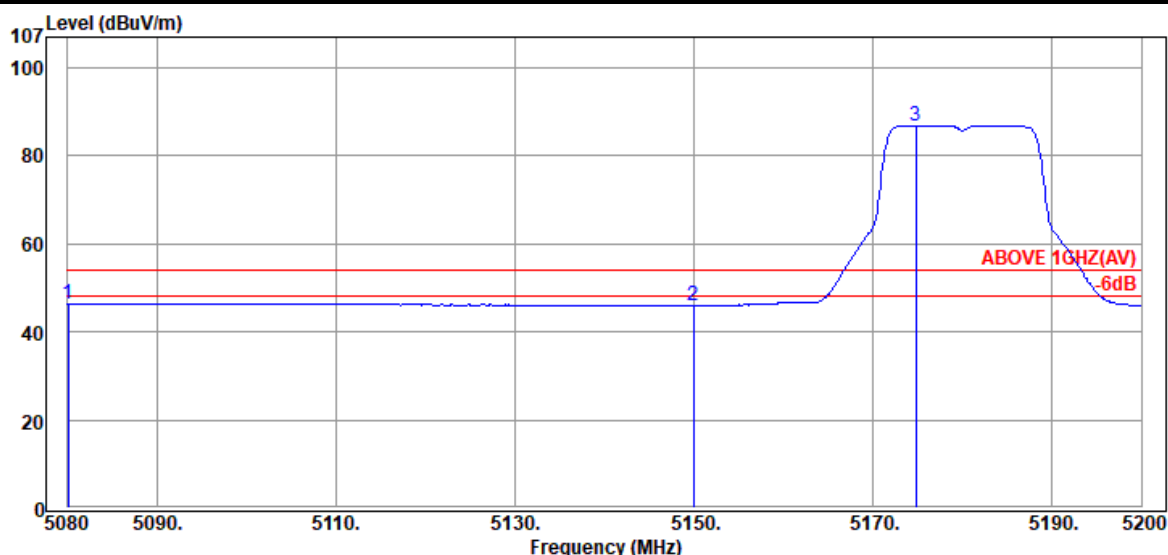

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.12	33.80	8.69	3.80	46.29	54.00	7.71	Average
5149.96	33.90	8.73	3.41	46.04	54.00	7.96	Average
@ 5174.80	34.00	8.74	44.14	86.88	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

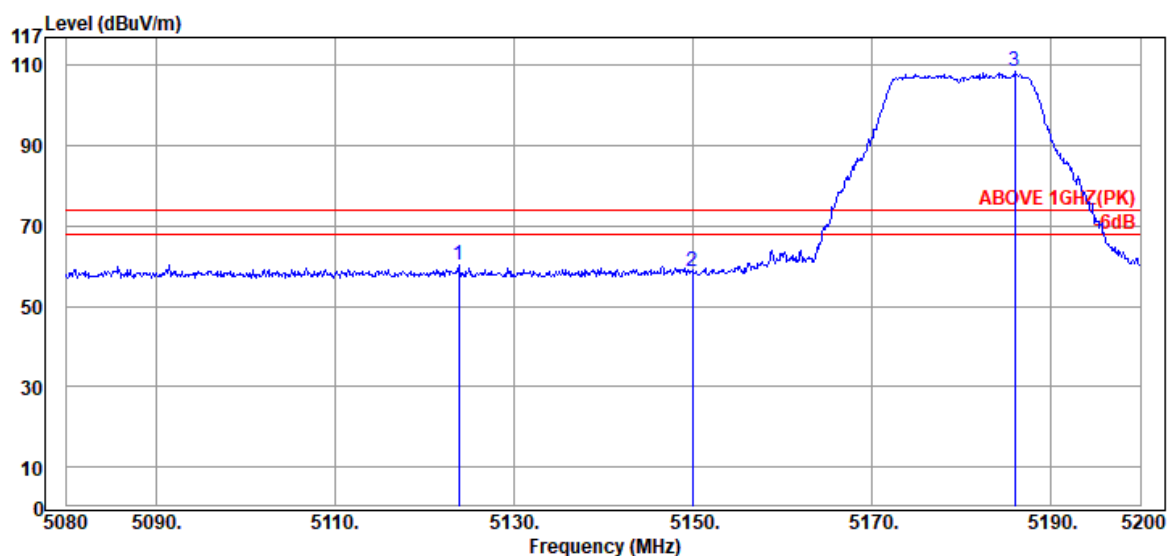

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.80	33.85	8.71	17.70	60.26	74.00	13.74	Peak
5149.96	33.90	8.73	15.93	58.56	74.00	15.44	Peak
@ 5185.96	34.04	8.75	65.61	108.40	---	---	Peak

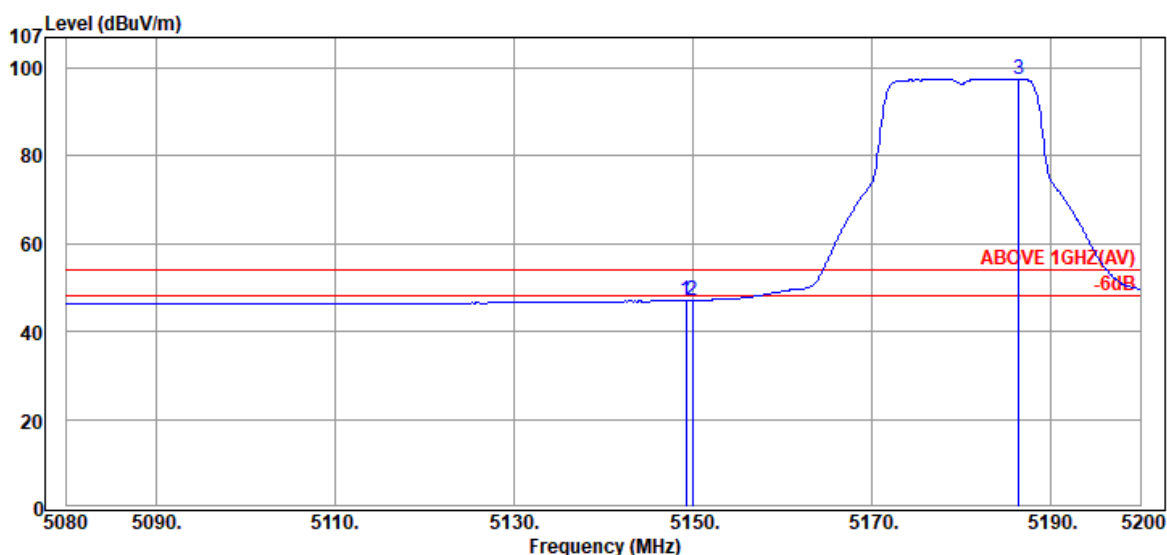

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.24	33.90	8.73	4.42	47.05	54.00	6.95	Average
5149.96	33.90	8.73	4.45	47.08	54.00	6.92	Average
@ 5186.44	34.05	8.75	54.71	97.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

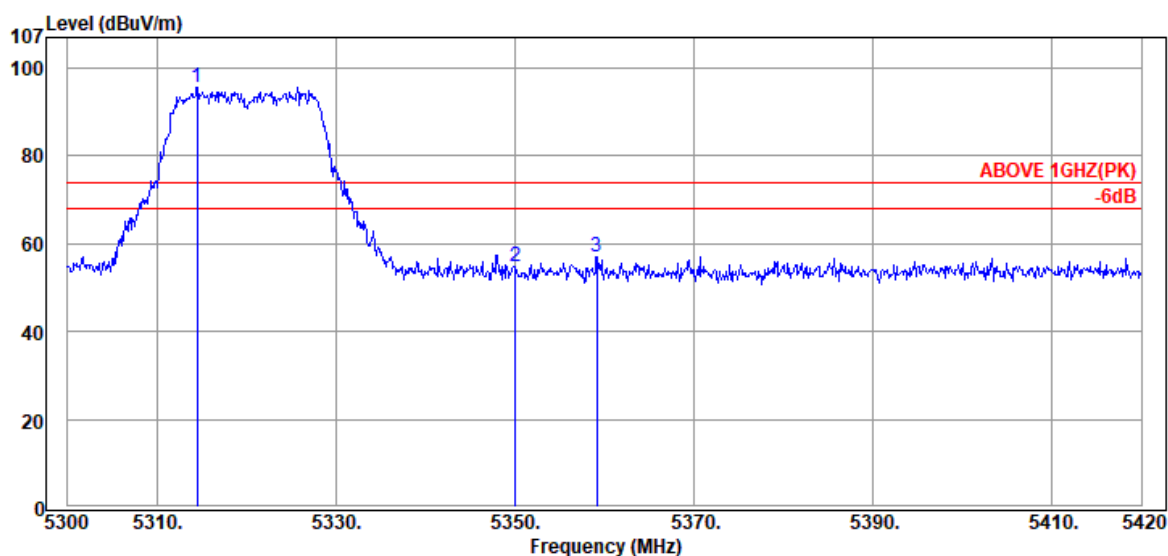

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.52	34.50	8.82	52.43	95.75	---	---	Peak
5350.04	34.50	8.84	11.33	54.67	74.00	19.33	Peak
5359.16	34.50	8.85	13.73	57.08	74.00	16.92	Peak

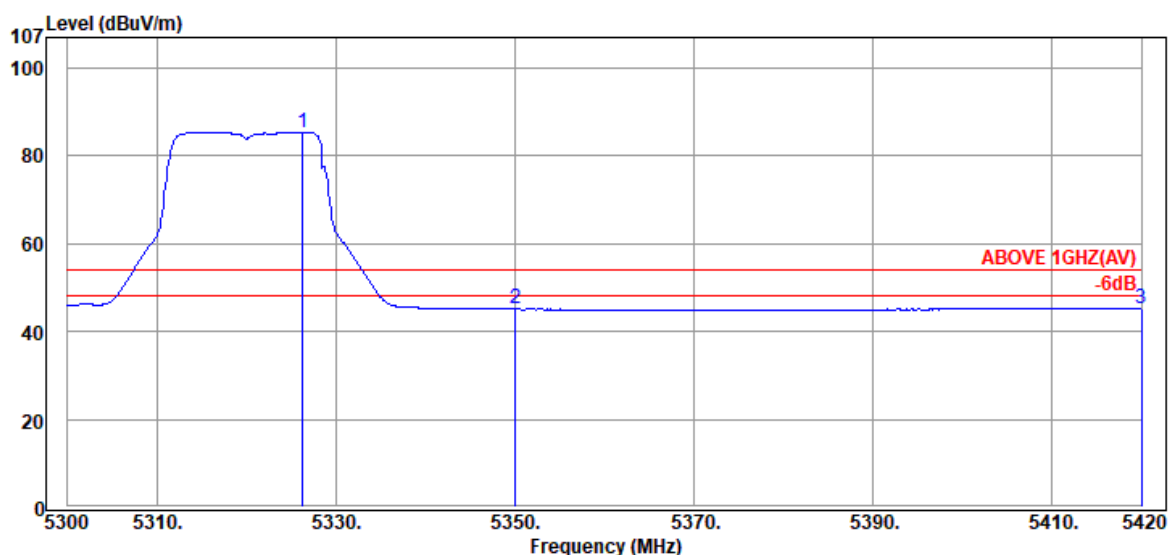

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.28	34.50	8.83	42.03	85.36	---	---	Average
5350.04	34.50	8.84	1.74	45.08	54.00	8.92	Average
5420.00	34.50	8.88	1.87	45.25	54.00	8.75	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

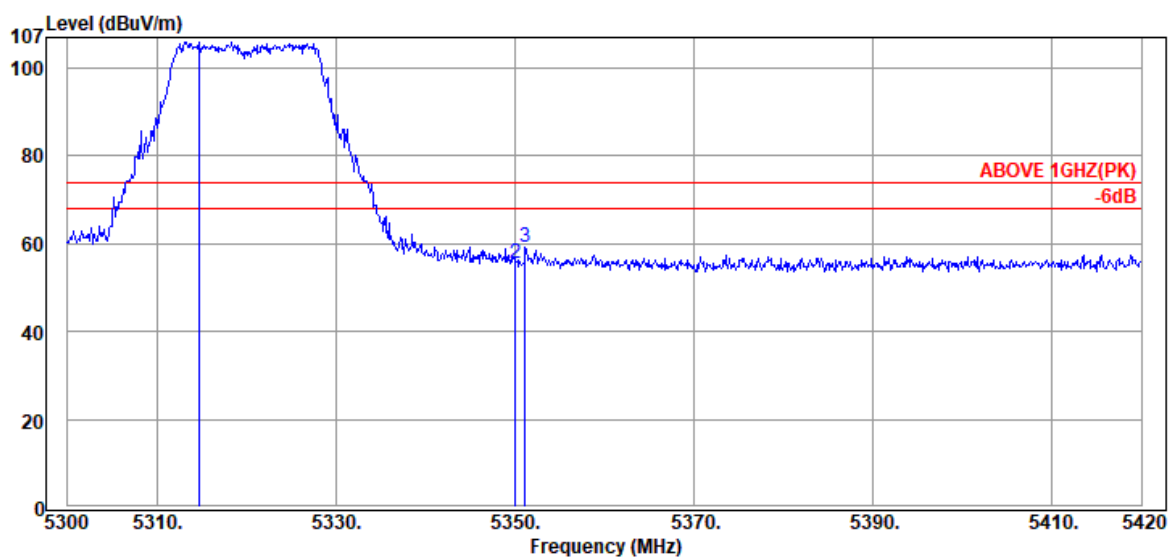

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.64	34.50	8.82	62.50	105.82	---	---	Peak
5350.04	34.50	8.84	12.09	55.43	74.00	18.57	Peak
5351.12	34.50	8.84	15.87	59.21	74.00	14.79	Peak

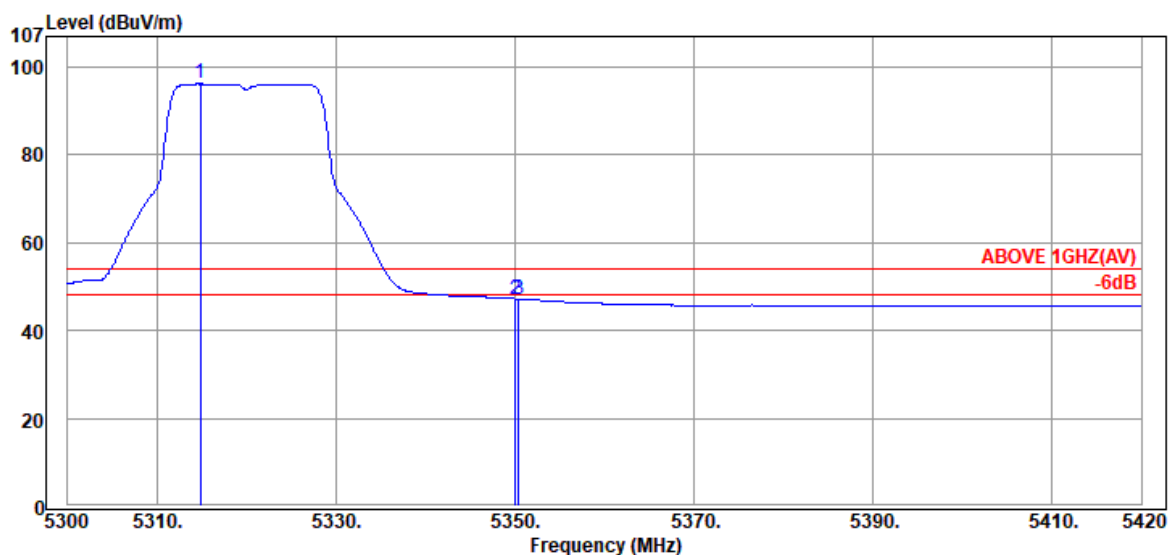

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.88	34.50	8.82	52.86	96.18	---	---	Average
5350.04	34.50	8.84	3.88	47.22	54.00	6.78	Average
5350.40	34.50	8.84	3.86	47.20	54.00	6.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

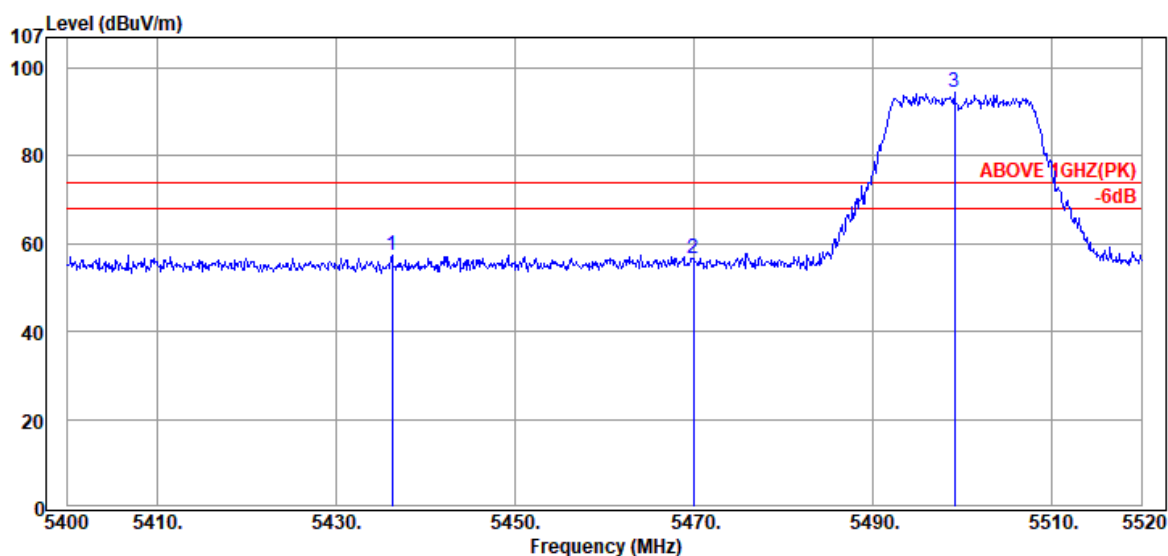

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.24	34.50	8.89	14.12	57.51	74.00	16.49	Peak
5469.96	34.50	8.91	13.11	56.52	74.00	17.48	Peak
@ 5499.12	34.50	8.92	51.08	94.50	---	---	Peak

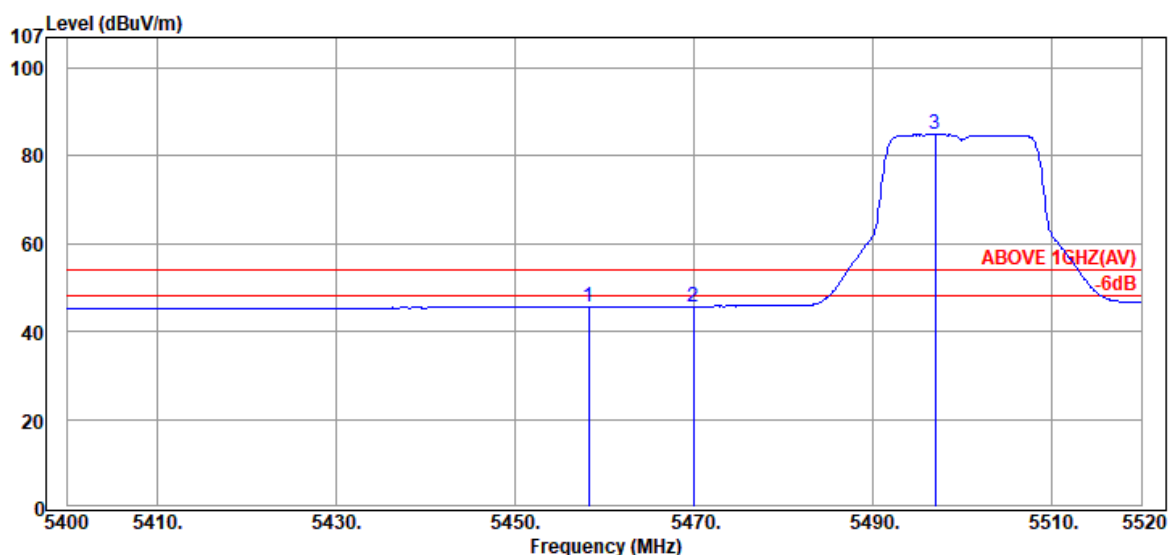

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.20	34.50	8.90	2.22	45.62	54.00	8.38	Average
5469.96	34.50	8.91	2.33	45.74	54.00	8.26	Average
@ 5496.96	34.50	8.92	41.43	84.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

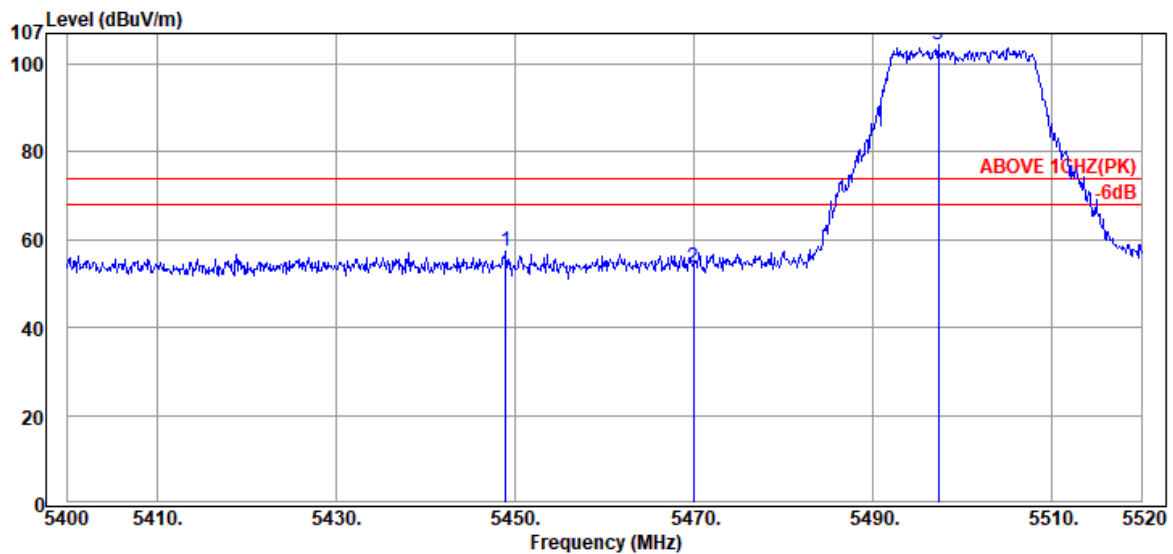

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.96	34.50	8.89	13.82	57.21	74.00	16.79	Peak
5469.96	34.50	8.91	10.21	53.62	74.00	20.38	Peak
@ 5497.32	34.50	8.92	61.11	104.53	---	---	Peak

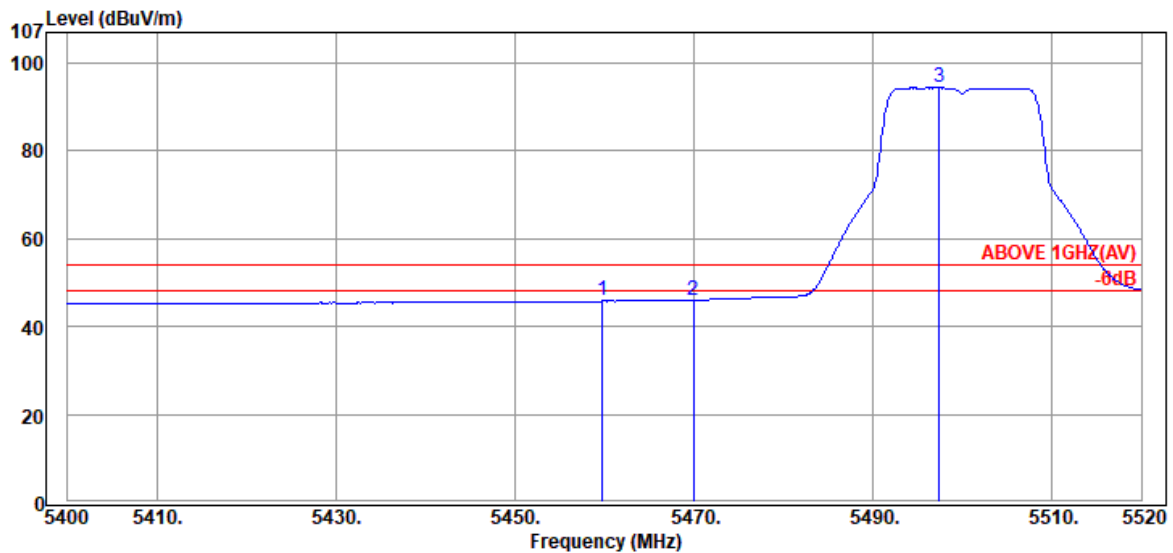

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.76	34.50	8.90	2.38	45.78	54.00	8.22	Average
5469.96	34.50	8.91	2.58	45.99	54.00	8.01	Average
@ 5497.44	34.50	8.92	50.95	94.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

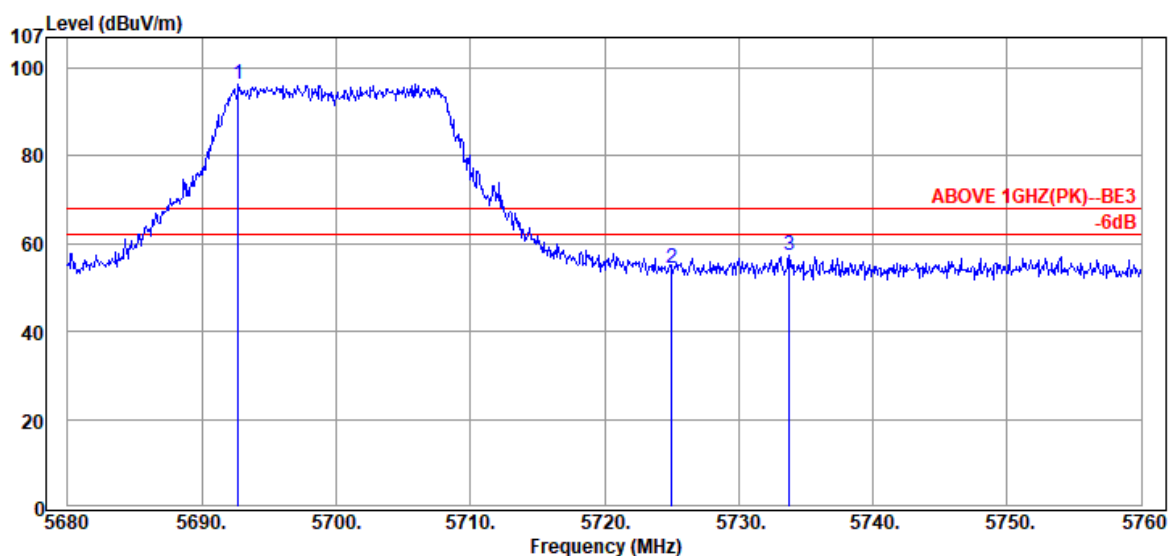

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5692.72	34.43	9.02	52.72	96.17	---	---	Peak
	5725.04	34.40	9.04	11.07	54.51	68.20	13.69	Peak
	5733.76	34.40	9.05	13.75	57.20	68.20	11.00	Peak

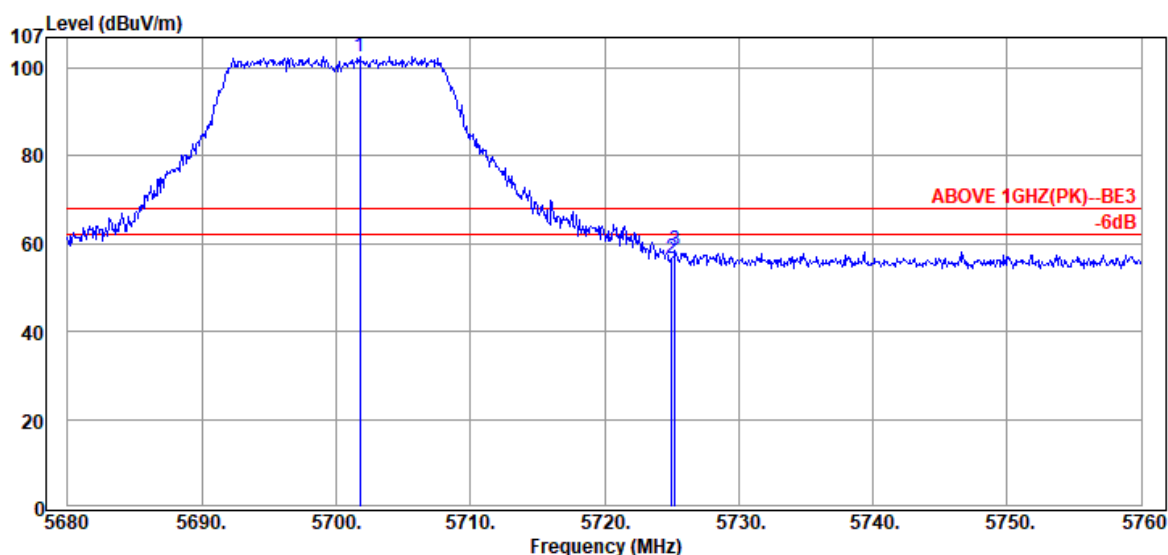

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.76	34.40	9.03	59.30	102.73	---	---	Peak
	5725.04	34.40	9.04	13.22	56.66	68.20	11.54	Peak
	5725.28	34.40	9.04	14.89	58.33	68.20	9.87	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5720MHz

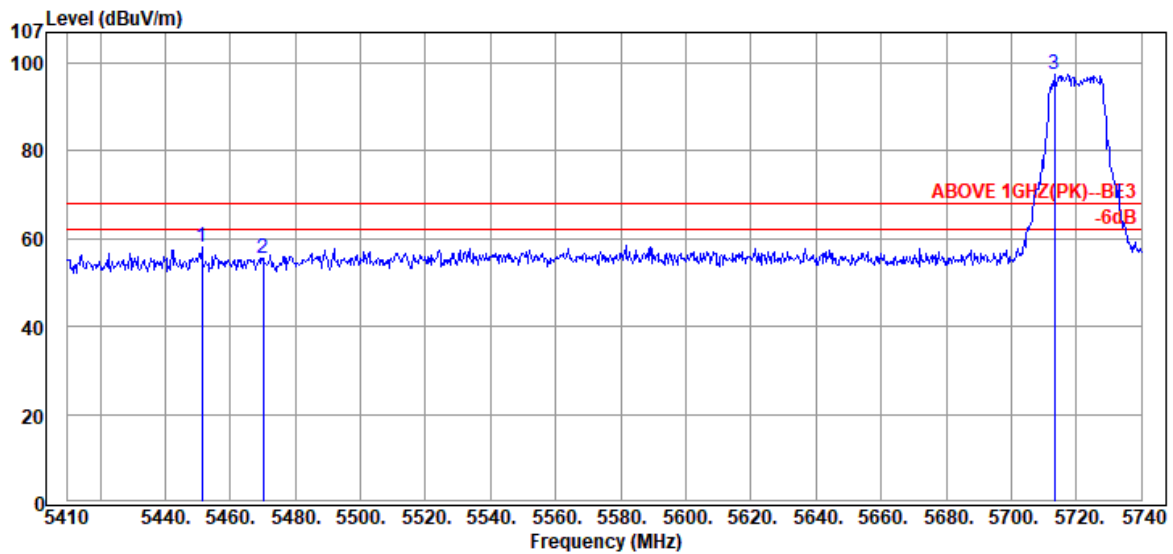

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.25	34.50	8.90	14.52	57.92	68.20	10.28	Peak
5470.06	34.50	8.91	12.13	55.54	68.20	12.66	Peak
@ 5713.27	34.40	9.03	53.90	97.33	---	---	Peak

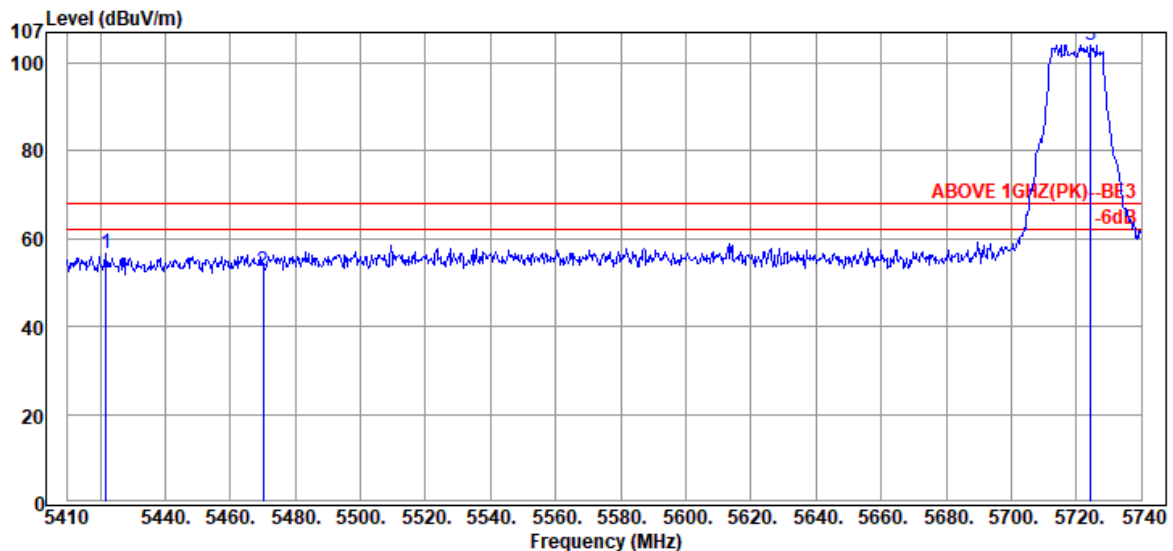

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.88	34.50	8.88	13.35	56.73	68.20	11.47	Peak
5470.06	34.50	8.91	9.28	52.69	68.20	15.51	Peak
@ 5724.49	34.40	9.04	60.74	104.18	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5720MHz

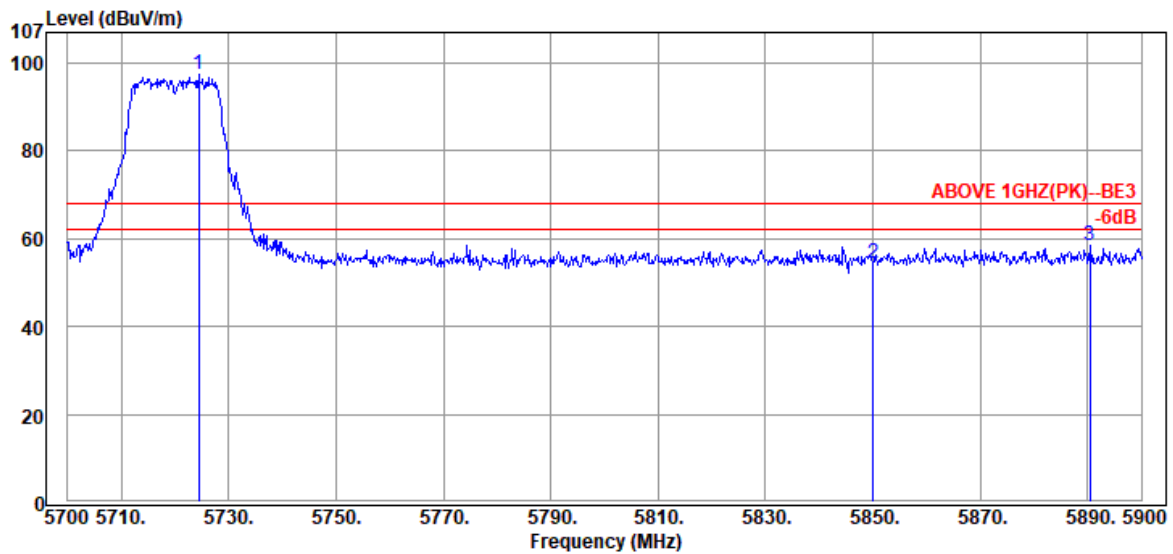

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5724.40	34.40	9.04	53.97	97.41	---	---	Peak
	5850.00	34.40	9.11	10.87	54.38	68.20	13.82	Peak
	5890.40	34.48	9.13	14.76	58.37	68.20	9.83	Peak

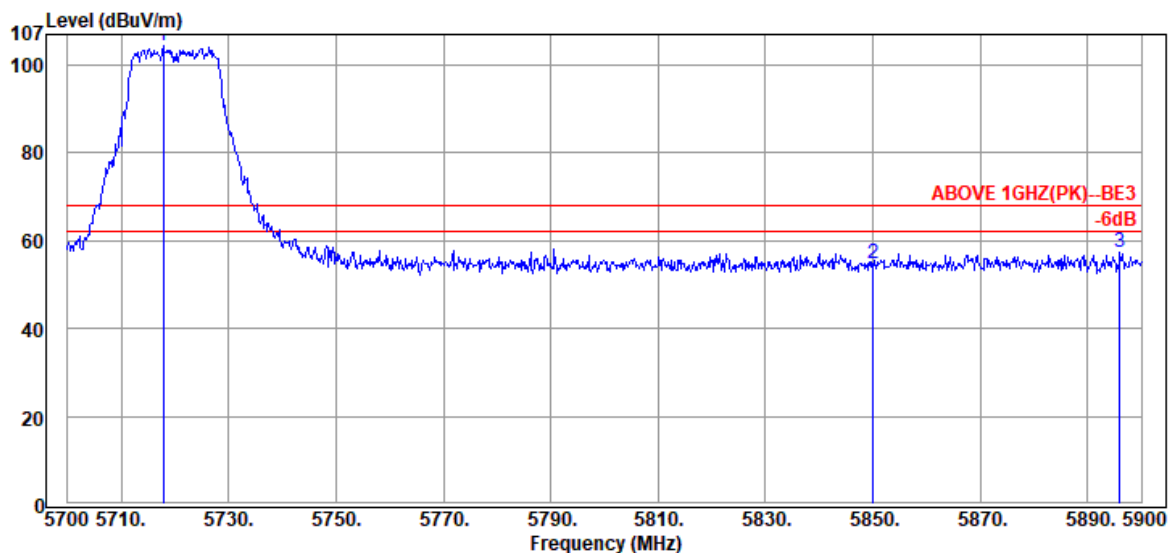

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.80	34.40	9.04	61.00	104.44	---	---	Peak
	5850.00	34.40	9.11	11.36	54.87	68.20	13.33	Peak
	5896.00	34.49	9.13	13.67	57.29	68.20	10.91	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

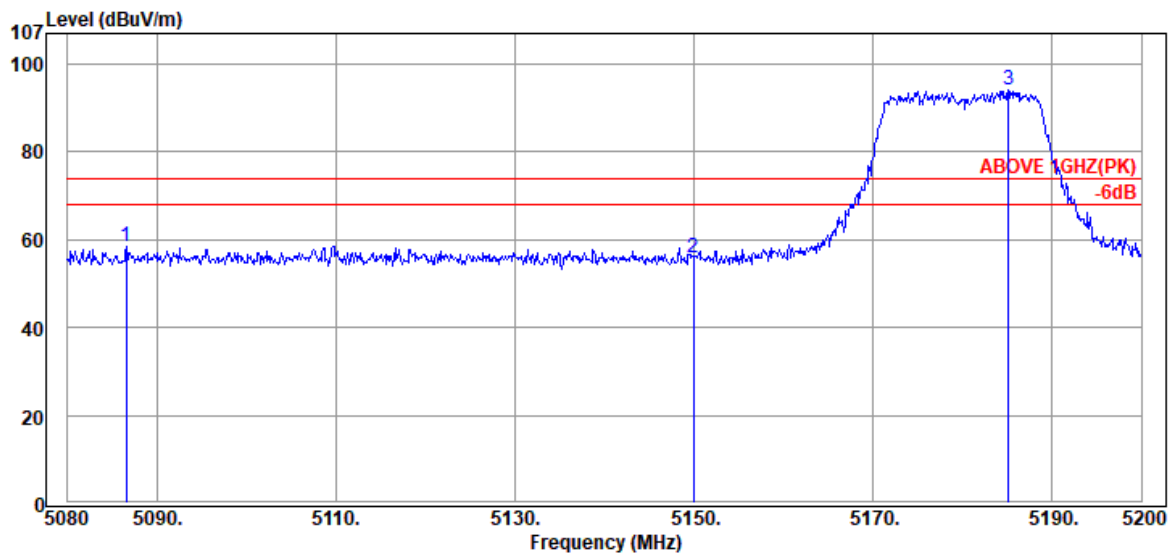

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5086.60	33.80	8.69	16.05	58.54	74.00	15.46	Peak
5149.96	33.90	8.73	13.33	55.96	74.00	18.04	Peak
@ 5185.12	34.04	8.75	51.18	93.97	---	---	Peak

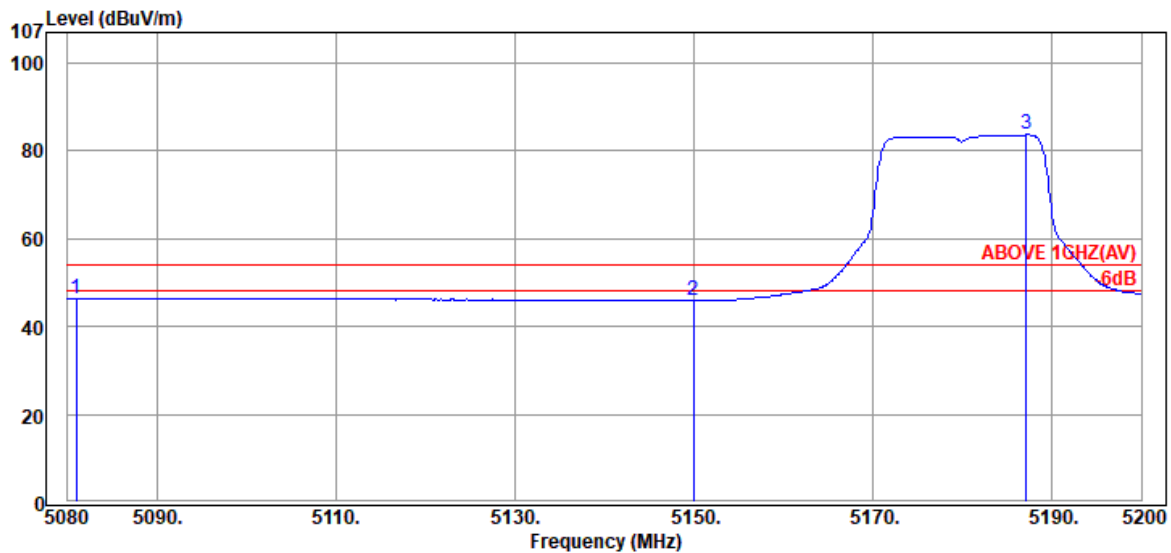

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.96	33.80	8.69	3.83	46.32	54.00	7.68	Average
5149.96	33.90	8.73	3.40	46.03	54.00	7.97	Average
@ 5187.16	34.05	8.75	40.91	83.71	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

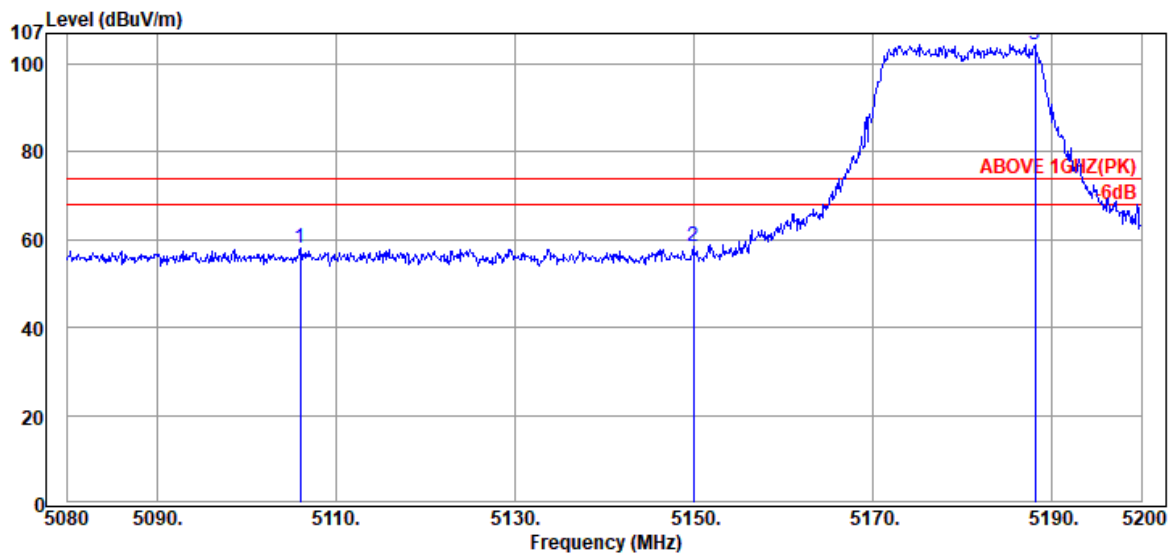

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.04	33.81	8.70	15.46	57.97	74.00	16.03	Peak
5149.96	33.90	8.73	15.73	58.36	74.00	15.64	Peak
@ 5188.12	34.05	8.75	61.75	104.55	---	---	Peak

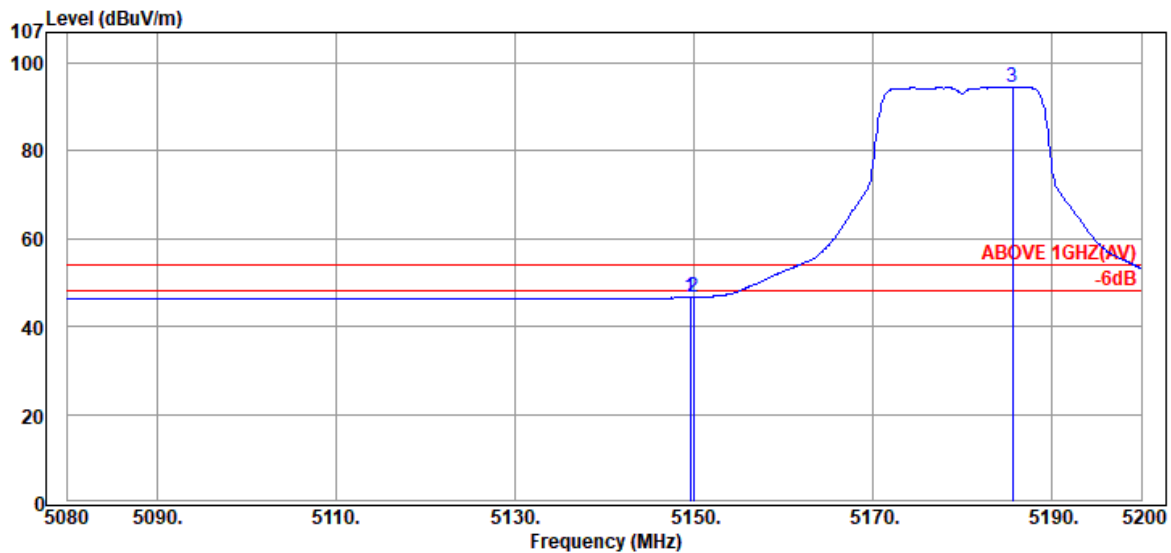

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.60	33.90	8.73	3.98	46.61	54.00	7.39	Average
5149.96	33.90	8.73	4.04	46.67	54.00	7.33	Average
@ 5185.60	34.04	8.75	51.68	94.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

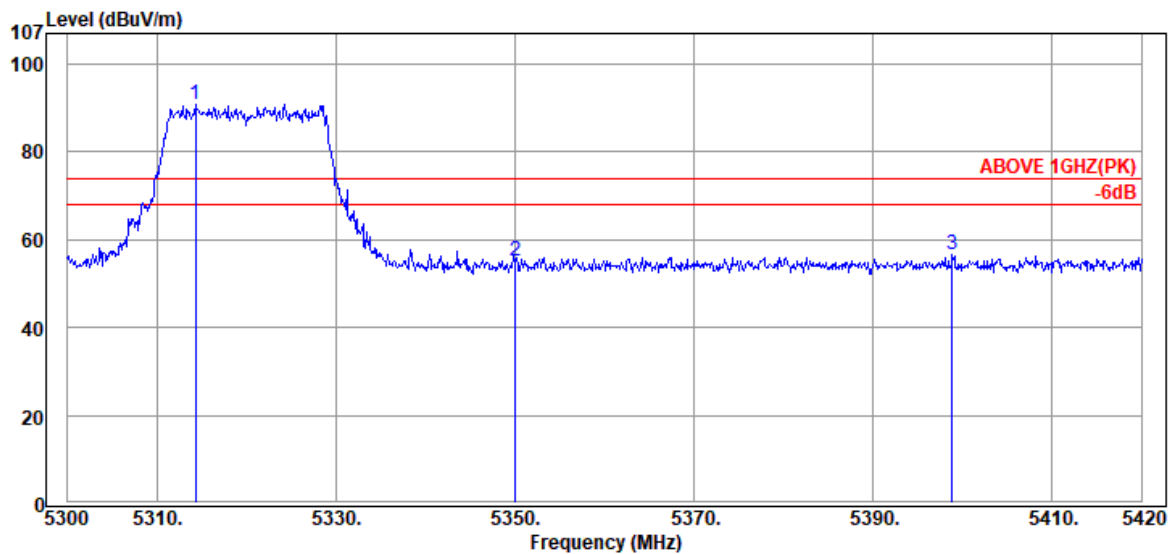

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.28	34.50	8.82	47.57	90.89	---	---	Peak
5350.04	34.50	8.84	11.79	55.13	74.00	18.87	Peak
5398.88	34.50	8.87	13.24	56.61	74.00	17.39	Peak

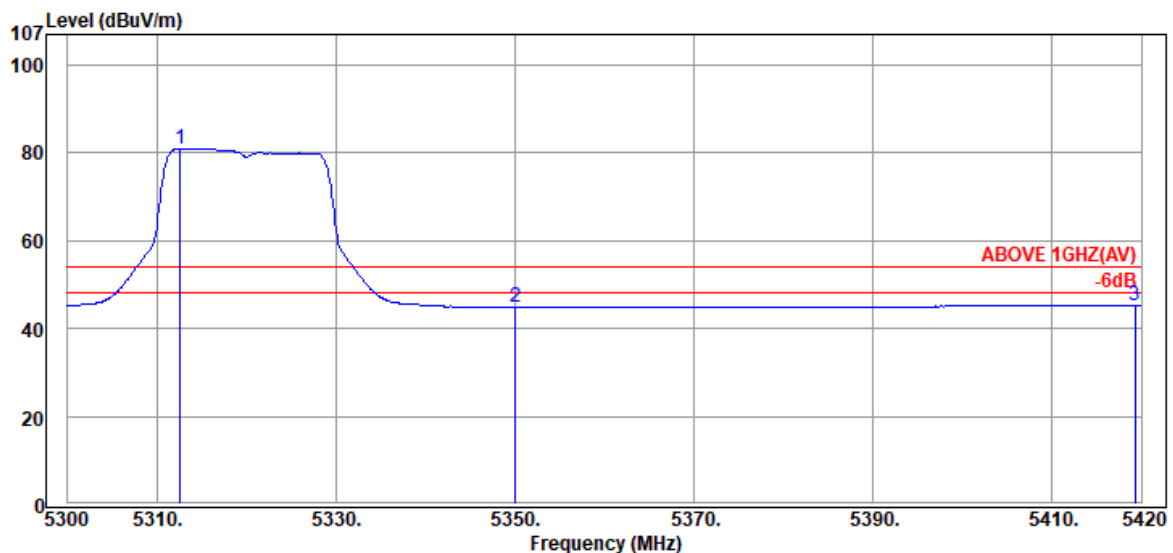

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.60	34.50	8.82	37.67	80.99	---	---	Average
5350.04	34.50	8.84	1.51	44.85	54.00	9.15	Average
5419.28	34.50	8.88	1.89	45.27	54.00	8.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

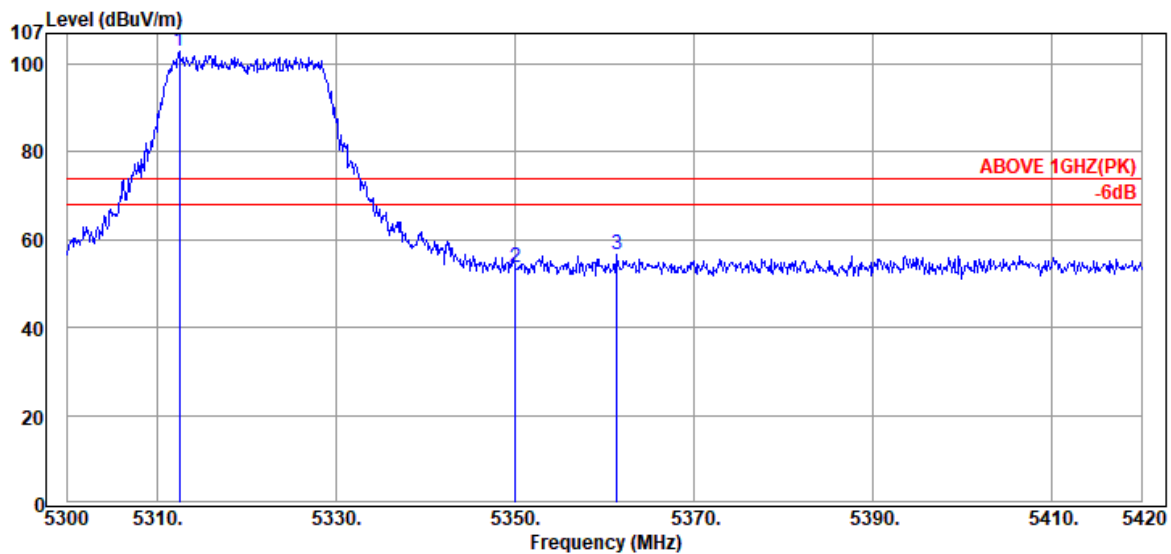

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.48	34.50	8.82	59.47	102.79	---	---	Peak
5350.04	34.50	8.84	10.34	53.68	74.00	20.32	Peak
5361.44	34.50	8.85	13.35	56.70	74.00	17.30	Peak

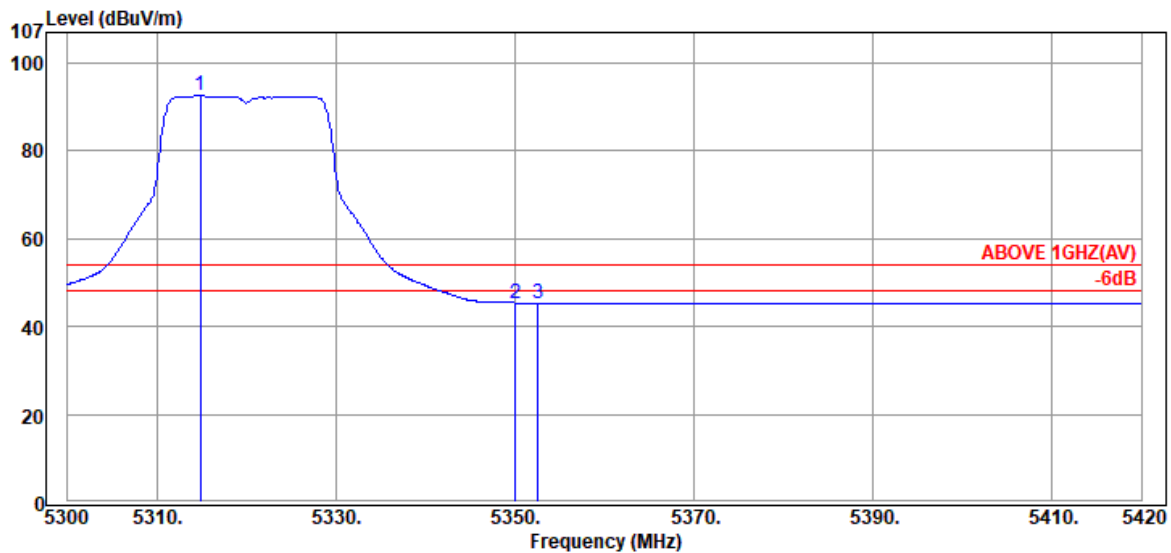

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.88	34.50	8.82	49.22	92.54	---	---	Average
5350.04	34.50	8.84	2.04	45.38	54.00	8.62	Average
5352.56	34.50	8.84	2.05	45.39	54.00	8.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

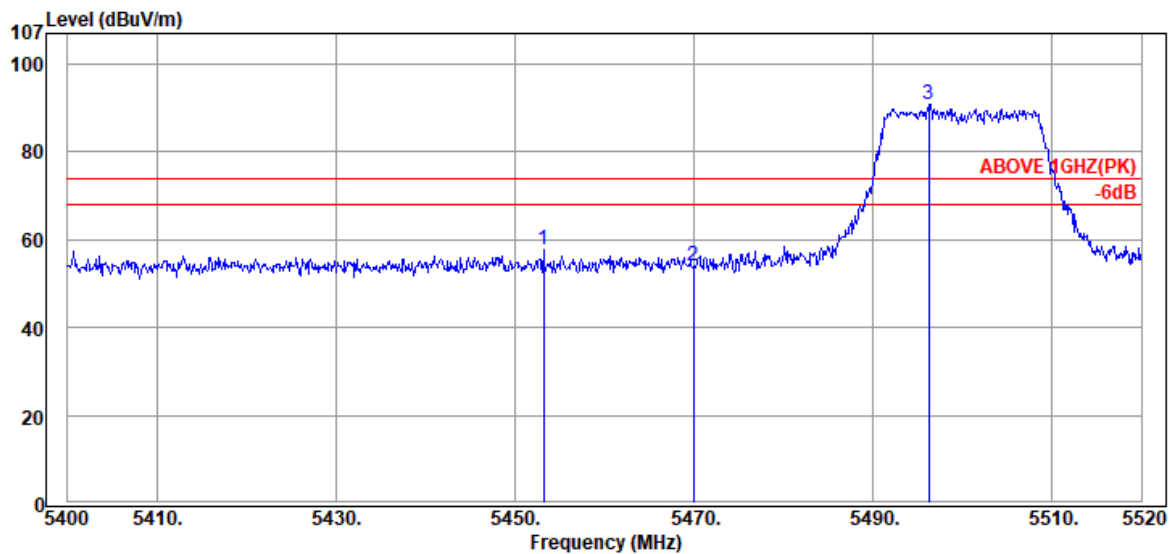

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.16	34.50	8.90	14.15	57.55	74.00	16.45	Peak
5469.96	34.50	8.91	10.66	54.07	74.00	19.93	Peak
@ 5496.24	34.50	8.92	47.43	90.85	---	---	Peak

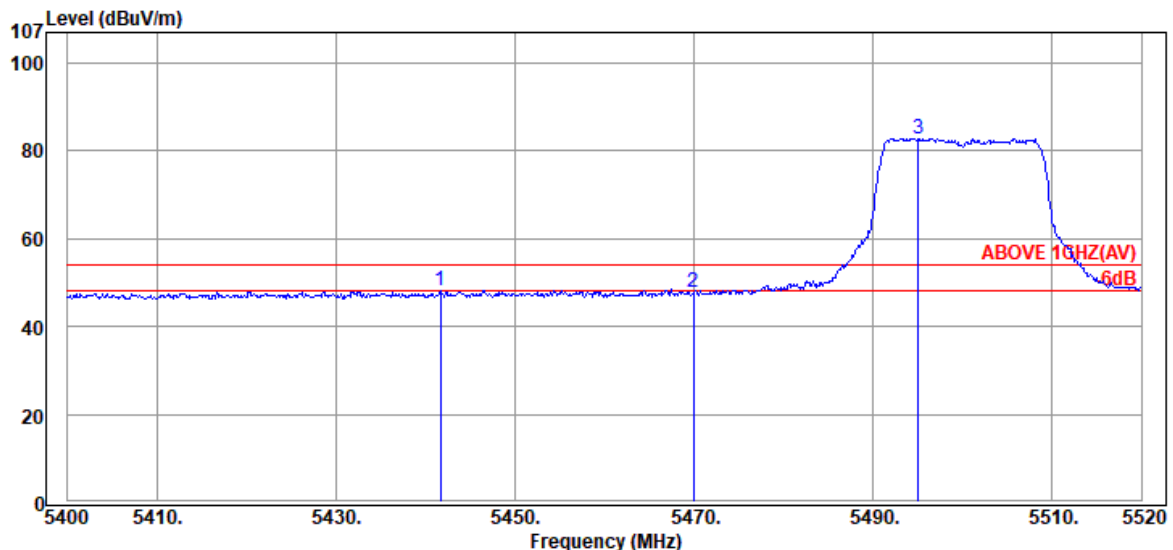

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.64	34.50	8.89	4.82	48.21	54.00	5.79	Average
5469.96	34.50	8.91	4.42	47.83	54.00	6.17	Average
@ 5495.04	34.50	8.92	39.46	82.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

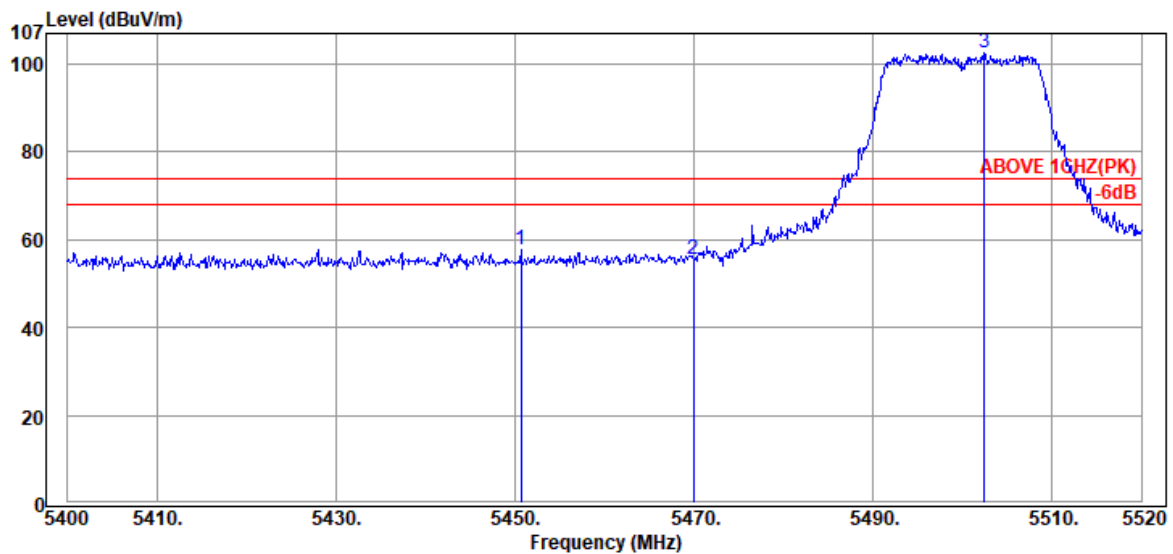

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.64	34.50	8.90	14.24	57.64	74.00	16.36	Peak
5469.96	34.50	8.91	12.21	55.62	74.00	18.38	Peak
@ 5502.48	34.50	8.92	59.20	102.62	---	---	Peak

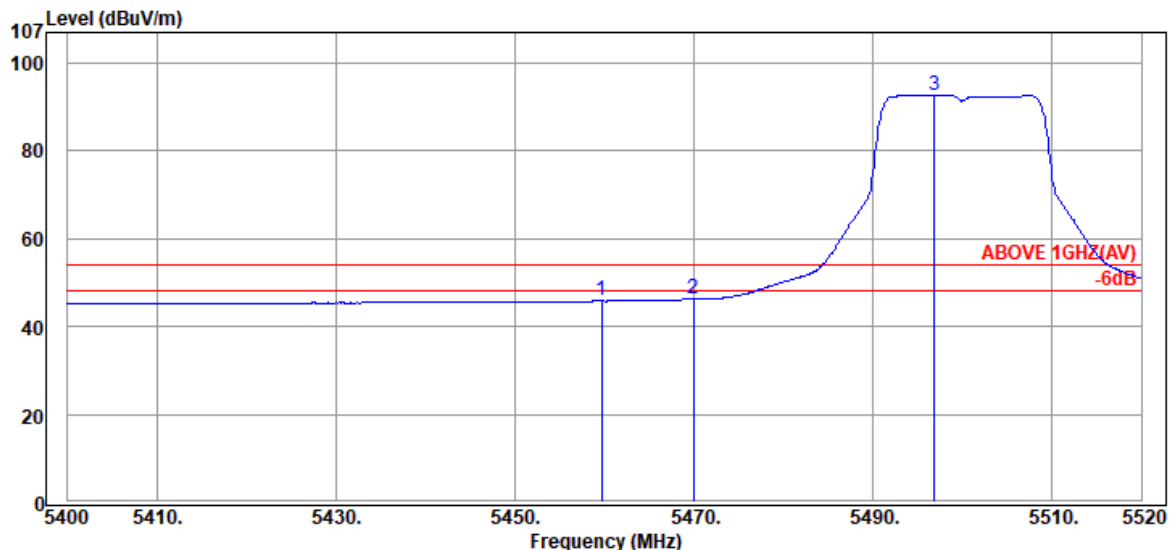

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.64	34.50	8.90	2.42	45.82	54.00	8.18	Average
5469.96	34.50	8.91	2.82	46.23	54.00	7.77	Average
@ 5496.84	34.50	8.92	49.23	92.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

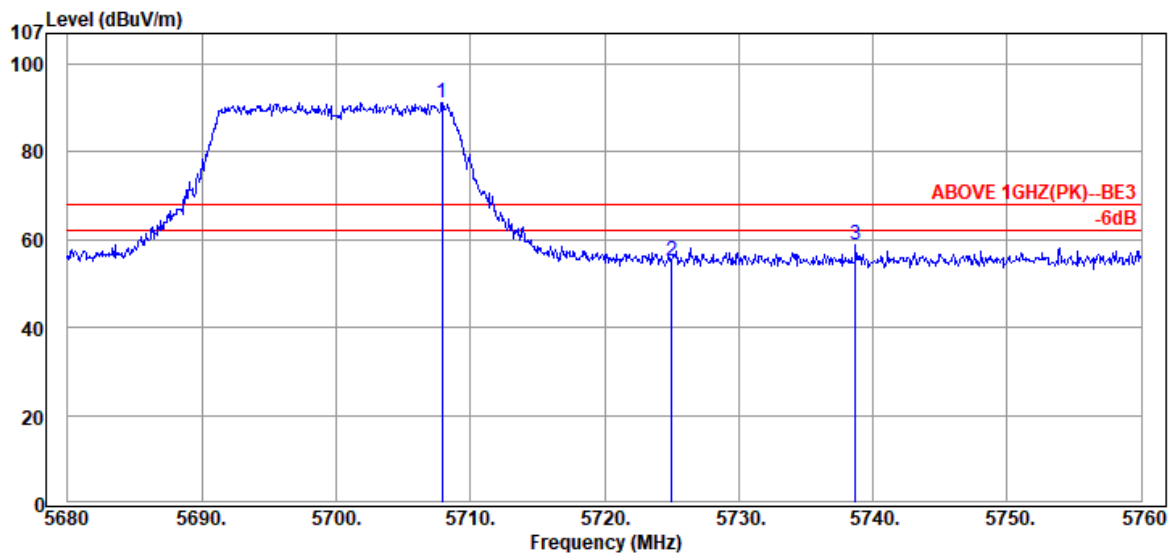

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.92	34.40	9.03	47.78	91.21	---	---	Peak
	5725.04	34.40	9.04	11.62	55.06	68.20	13.14	Peak
	5738.72	34.40	9.05	15.29	58.74	68.20	9.46	Peak

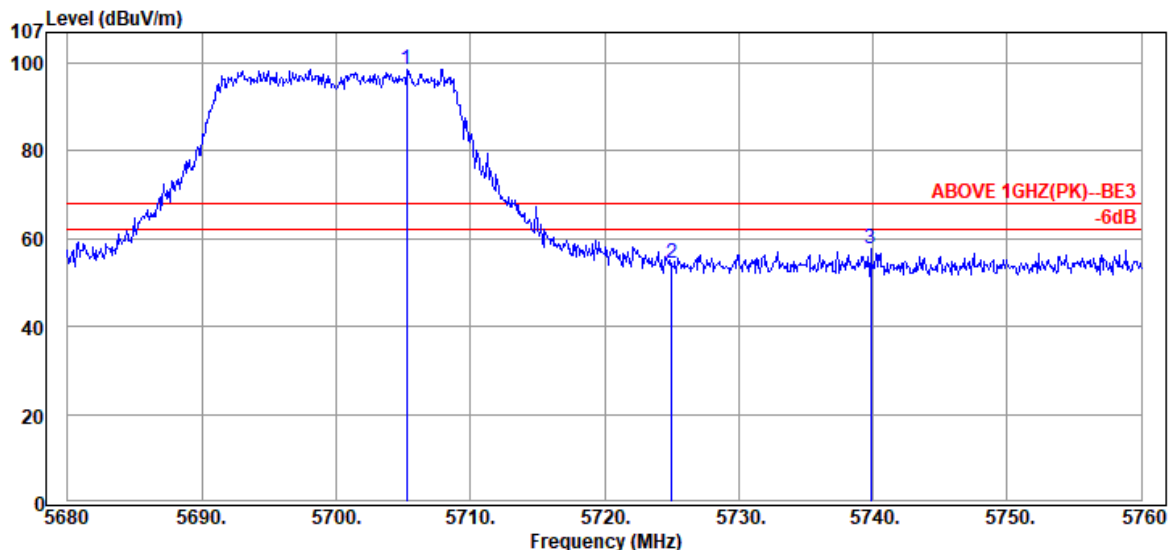

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.28	34.40	9.03	55.23	98.66	---	---	Peak
	5725.04	34.40	9.04	10.89	54.33	68.20	13.87	Peak
	5739.84	34.40	9.05	14.34	57.79	68.20	10.41	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

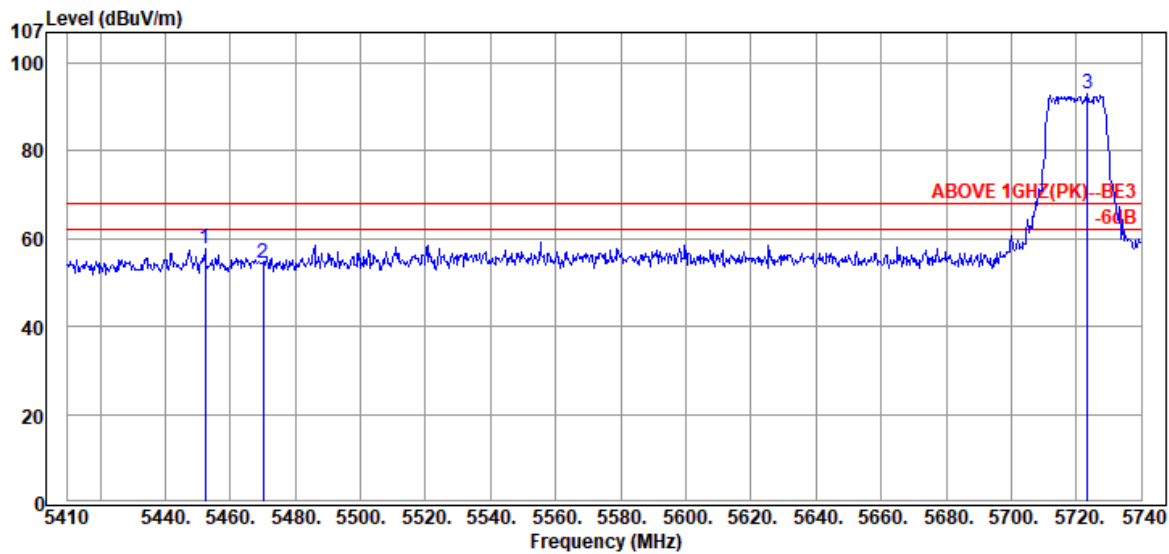

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.24	34.50	8.90	14.51	57.91	68.20	10.29	Peak
5470.06	34.50	8.91	11.13	54.54	68.20	13.66	Peak
@ 5723.50	34.40	9.04	49.54	92.98	---	---	Peak

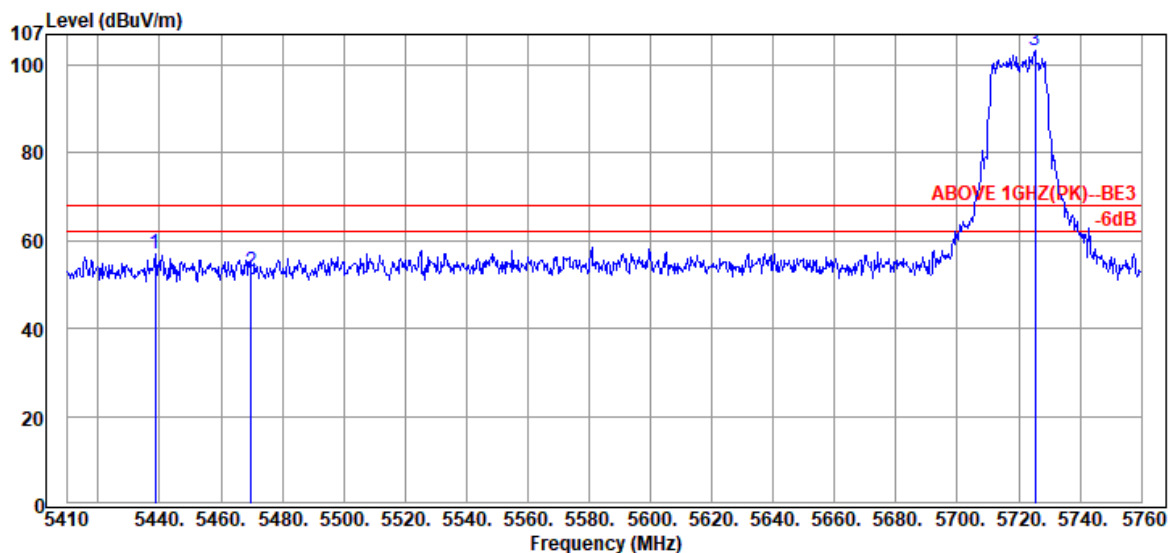

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.70	34.50	8.89	13.46	56.85	68.20	11.35	Peak
5469.85	34.50	8.91	9.56	52.97	68.20	15.23	Peak
@ 5725.35	34.40	9.04	60.05	103.49	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

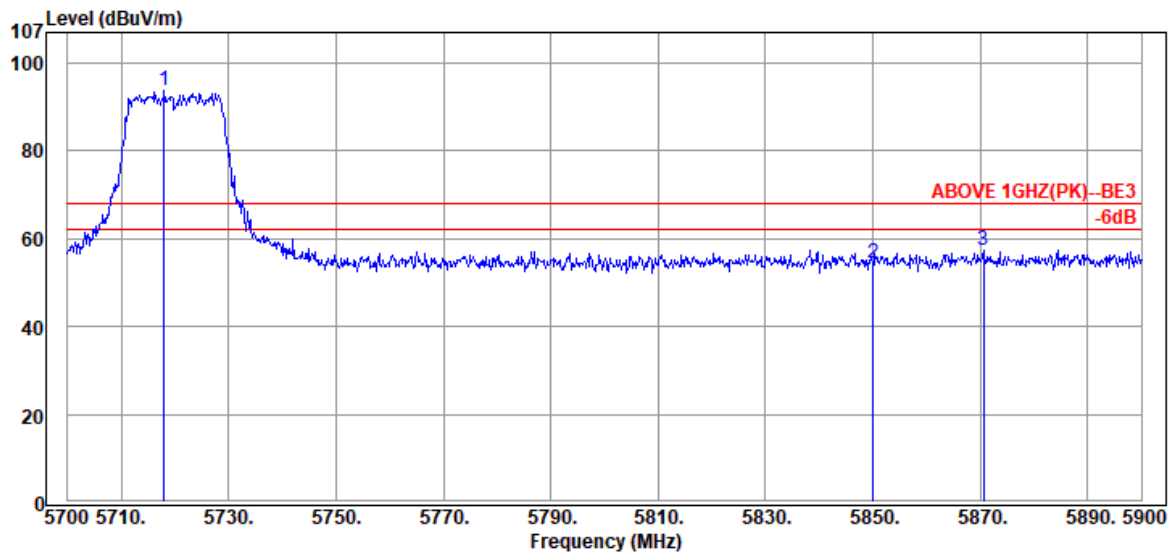

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5718.00	34.40	9.04	50.24	93.68	---	---	Peak
	5850.00	34.40	9.11	10.99	54.50	68.20	13.70	Peak
	5870.60	34.44	9.12	13.82	57.38	68.20	10.82	Peak

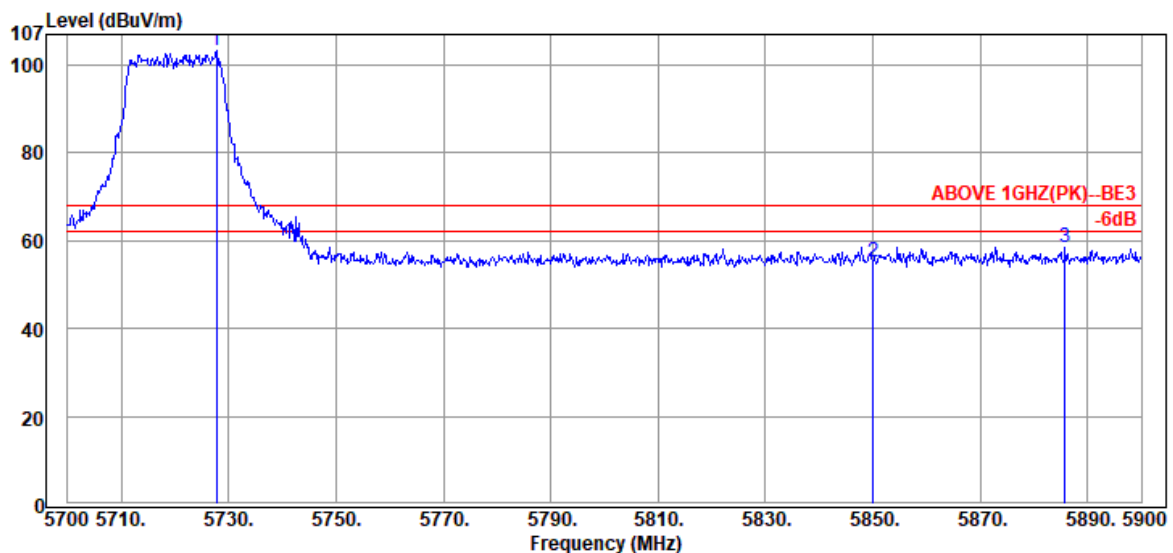

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5727.80	34.40	9.04	59.75	103.19	---	---	Peak
	5850.00	34.40	9.11	11.70	55.21	68.20	12.99	Peak
	5885.80	34.47	9.12	15.06	58.65	68.20	9.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

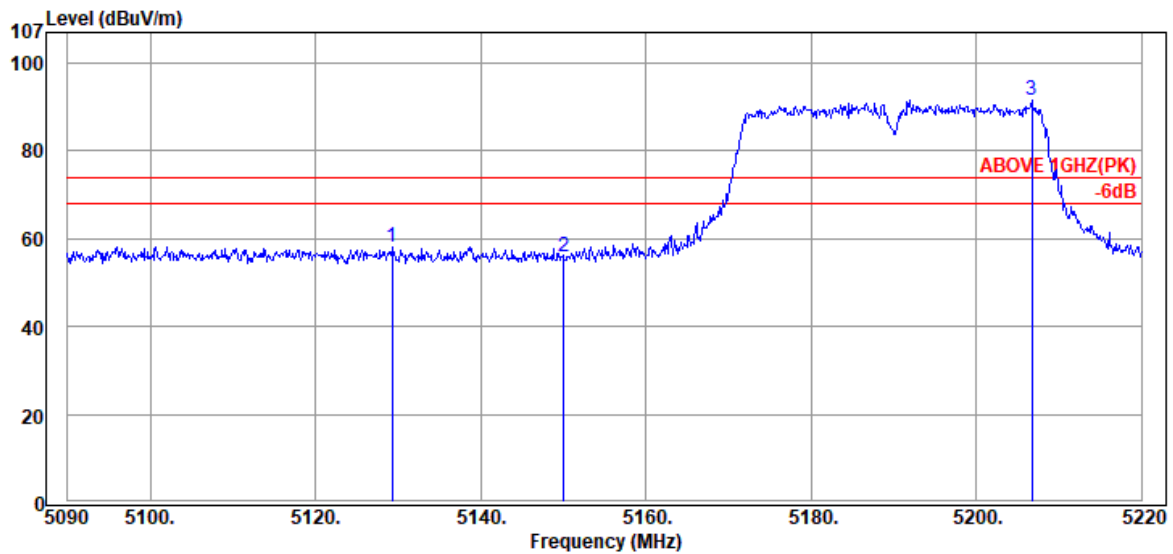

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.26	33.86	8.72	15.66	58.24	74.00	15.76	Peak
5150.06	33.90	8.73	13.31	55.94	74.00	18.06	Peak
@ 5206.74	34.14	8.76	48.81	91.71	---	---	Peak

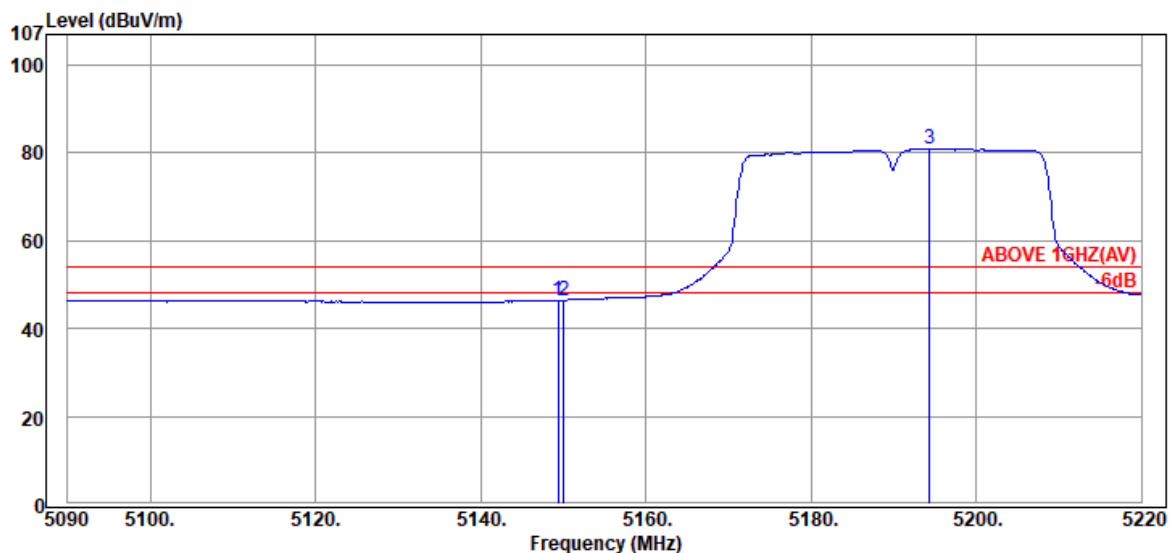

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.41	33.90	8.73	3.80	46.43	54.00	7.57	Average
5150.06	33.90	8.73	3.84	46.47	54.00	7.53	Average
@ 5194.39	34.08	8.75	38.04	80.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

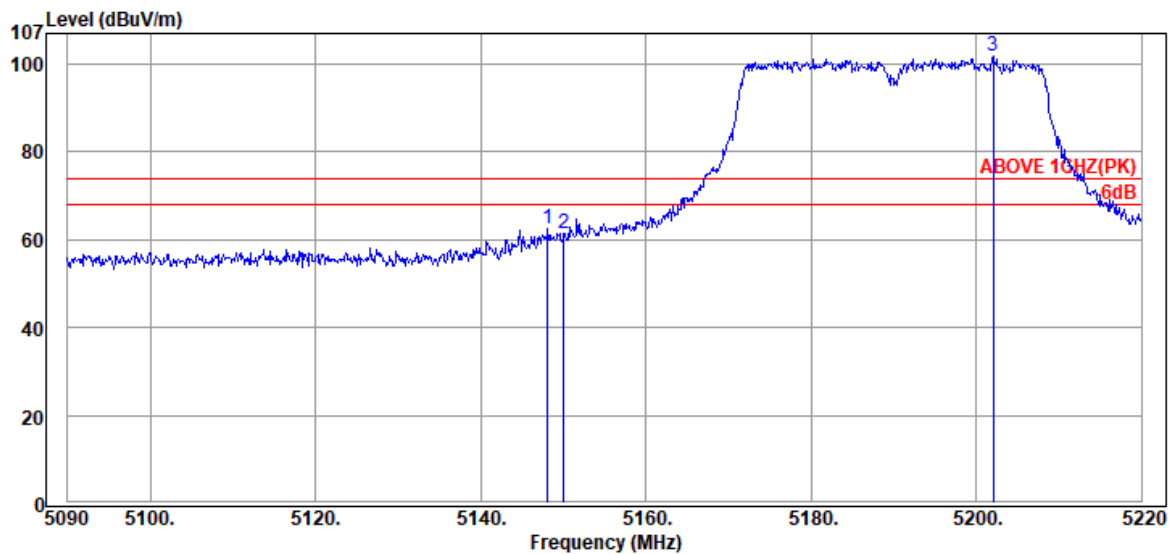

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.11	33.90	8.73	19.73	62.36	74.00	11.64	Peak
5150.06	33.90	8.73	18.88	61.51	74.00	12.49	Peak
@ 5202.06	34.11	8.76	58.82	101.69	---	---	Peak

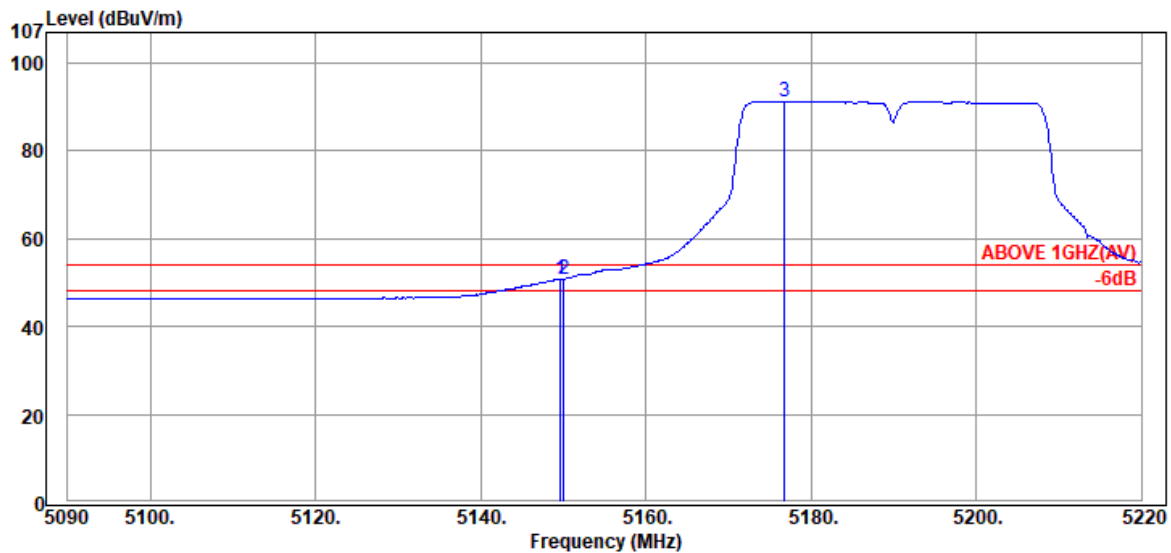

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	8.23	50.86	54.00	3.14	Average
5150.06	33.90	8.73	8.22	50.85	54.00	3.15	Average
@ 5176.84	34.01	8.74	48.50	91.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

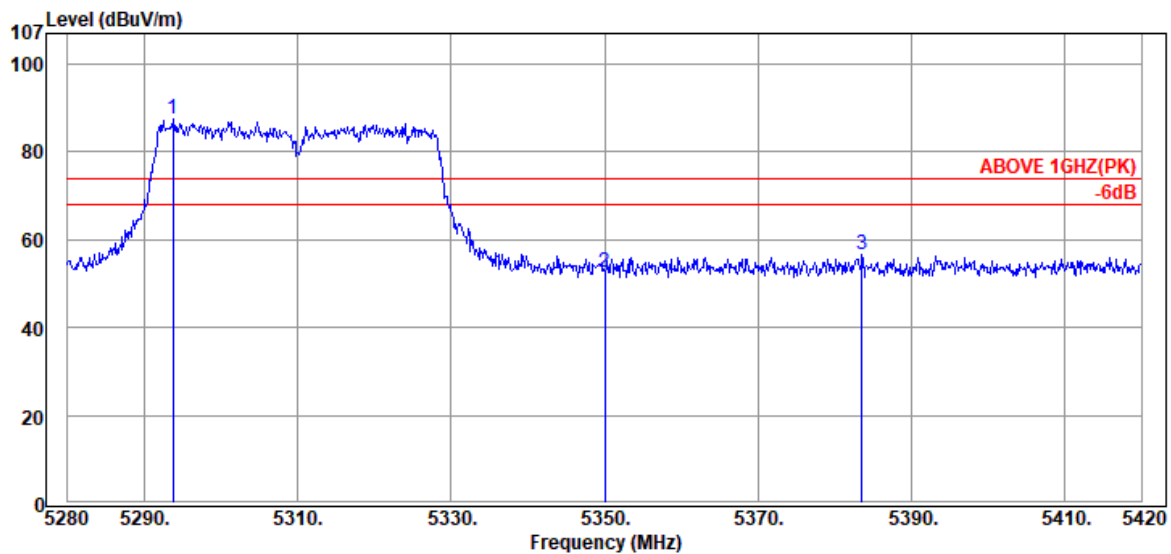

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.72	34.49	8.81	44.18	87.48	---	---	Peak
	5350.00	34.50	8.84	9.31	52.65	74.00	21.35	Peak
	5383.60	34.50	8.86	13.36	56.72	74.00	17.28	Peak

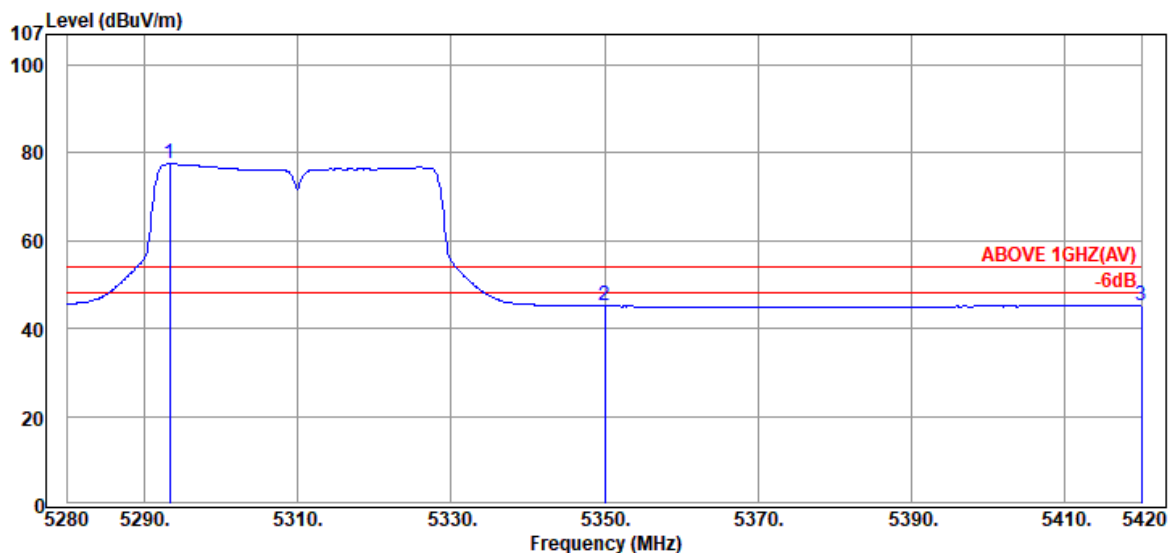

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.30	34.49	8.81	34.19	77.49	---	---	Average
	5350.00	34.50	8.84	1.77	45.11	54.00	8.89	Average
	5420.00	34.50	8.88	1.89	45.27	54.00	8.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

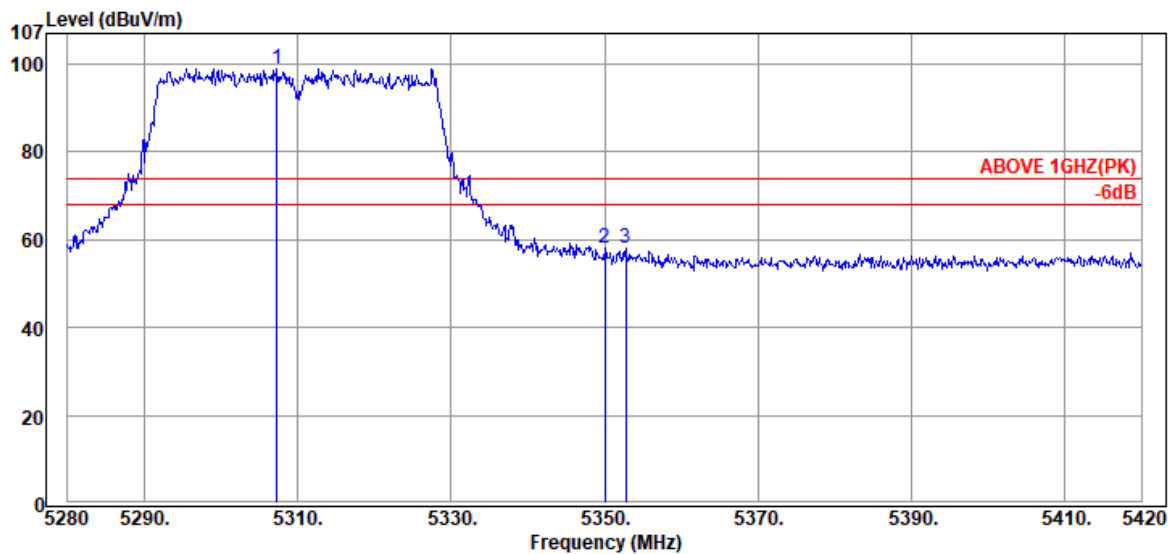

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.30	34.50	8.82	55.73	99.05	---	---	Peak
5350.00	34.50	8.84	14.77	58.11	74.00	15.89	Peak
5352.80	34.50	8.84	14.84	58.18	74.00	15.82	Peak

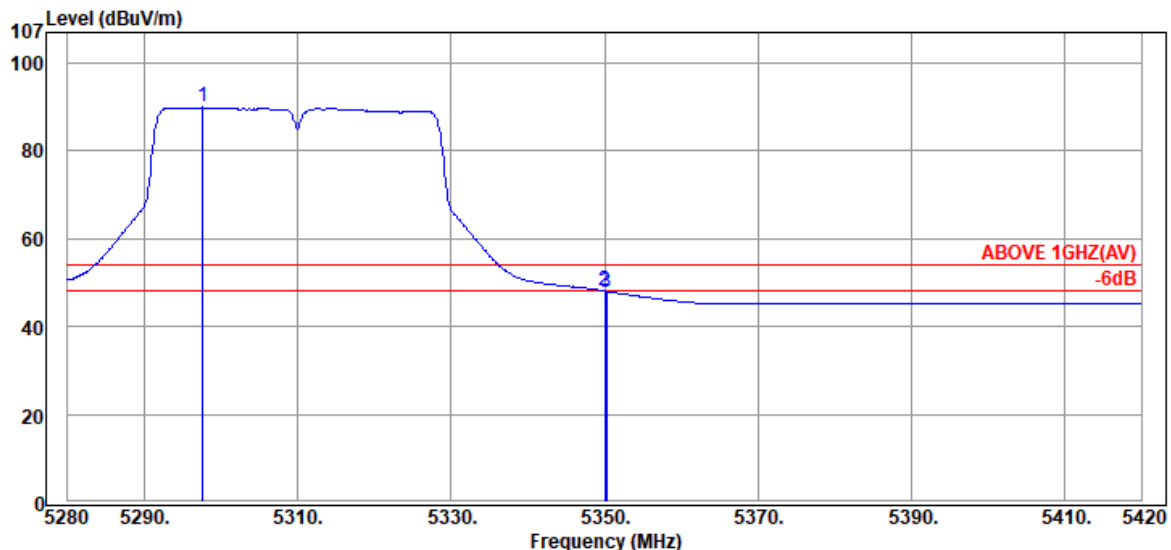

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.64	34.50	8.81	46.60	89.91	---	---	Average
5350.00	34.50	8.84	4.72	48.06	54.00	5.94	Average
5350.28	34.50	8.84	4.63	47.97	54.00	6.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

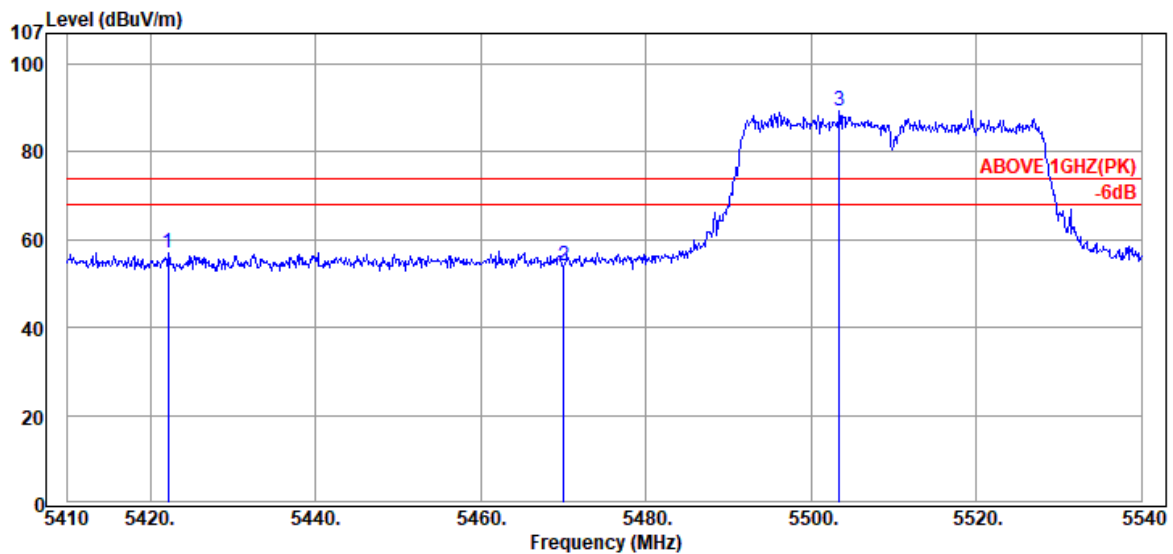

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.22	34.50	8.88	13.74	57.12	74.00	16.88	Peak
5470.06	34.50	8.91	10.69	54.10	74.00	19.90	Peak
@ 5503.47	34.51	8.92	45.97	89.40	---	---	Peak

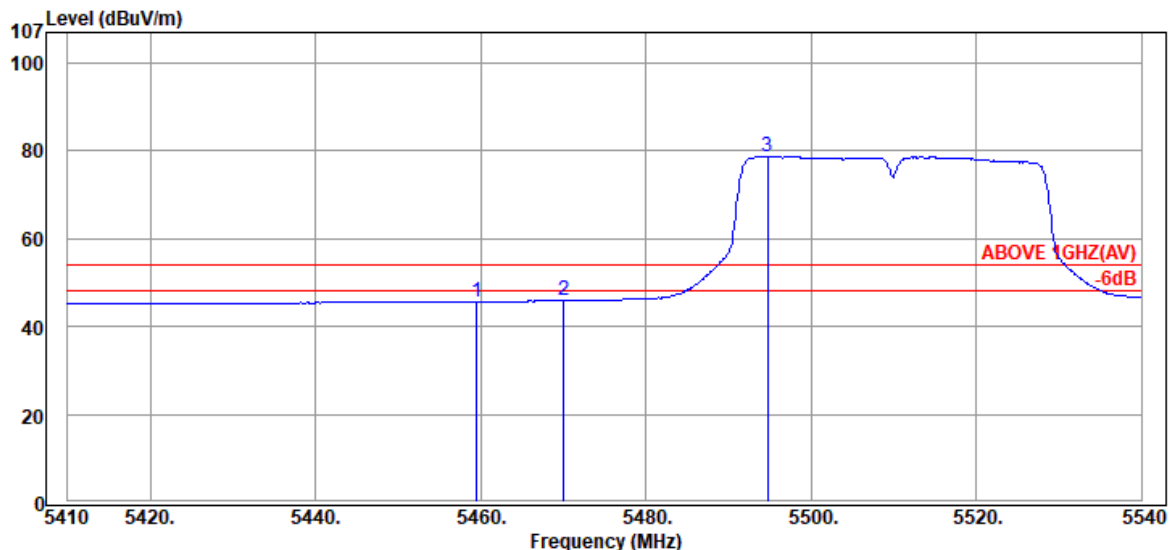

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.53	34.50	8.90	2.23	45.63	54.00	8.37	Average
5470.06	34.50	8.91	2.45	45.86	54.00	8.14	Average
@ 5494.76	34.50	8.92	35.19	78.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

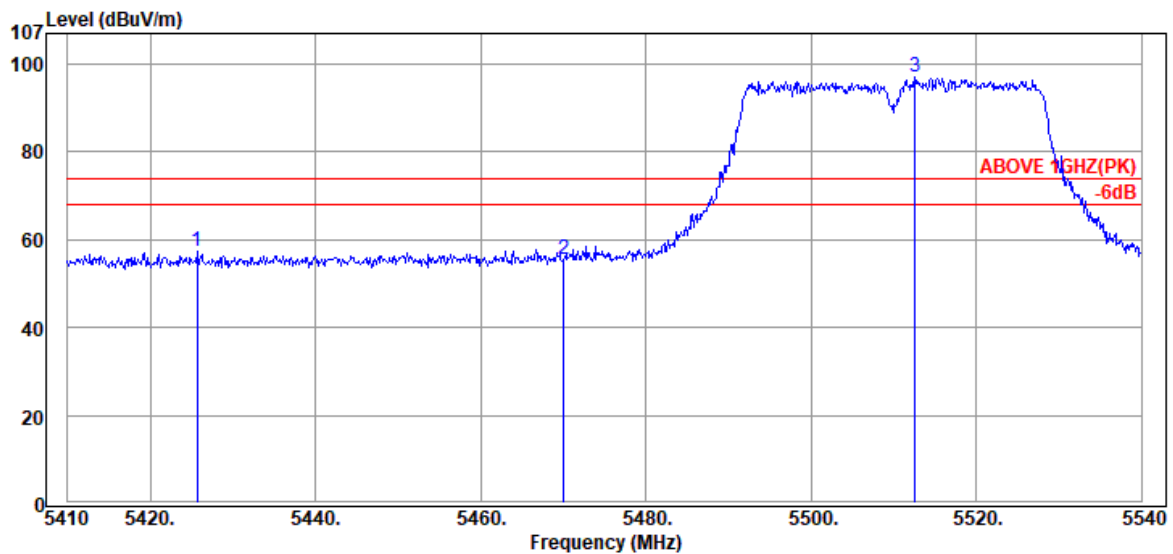

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.73	34.50	8.88	13.91	57.29	74.00	16.71	Peak
5470.06	34.50	8.91	12.20	55.61	74.00	18.39	Peak
@ 5512.57	34.53	8.93	53.64	97.10	---	---	Peak

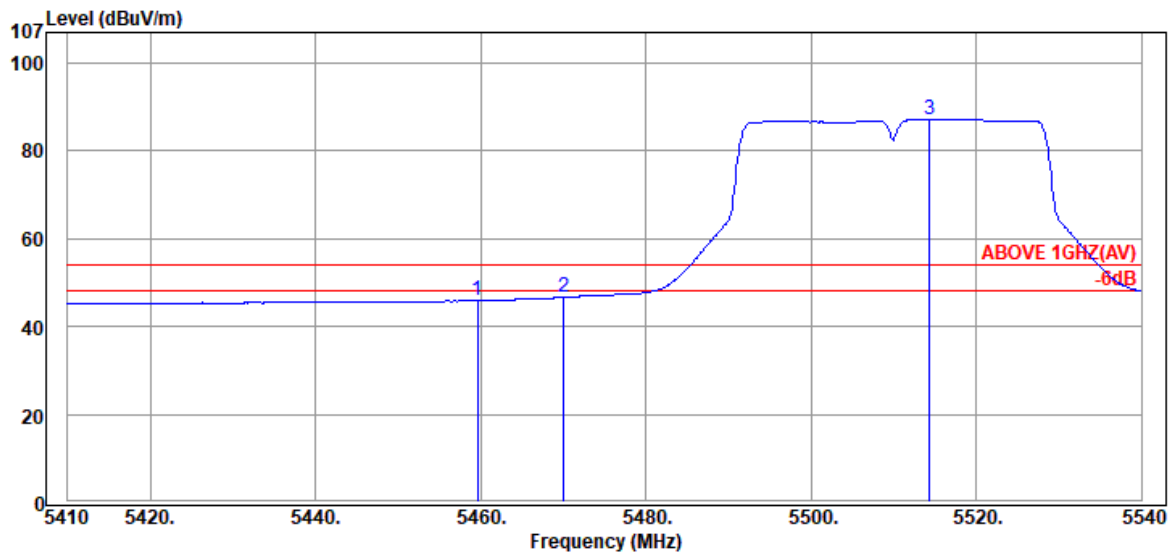

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.66	34.50	8.90	2.49	45.89	54.00	8.11	Average
5470.06	34.50	8.91	3.25	46.66	54.00	7.34	Average
@ 5514.39	34.53	8.93	43.79	87.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

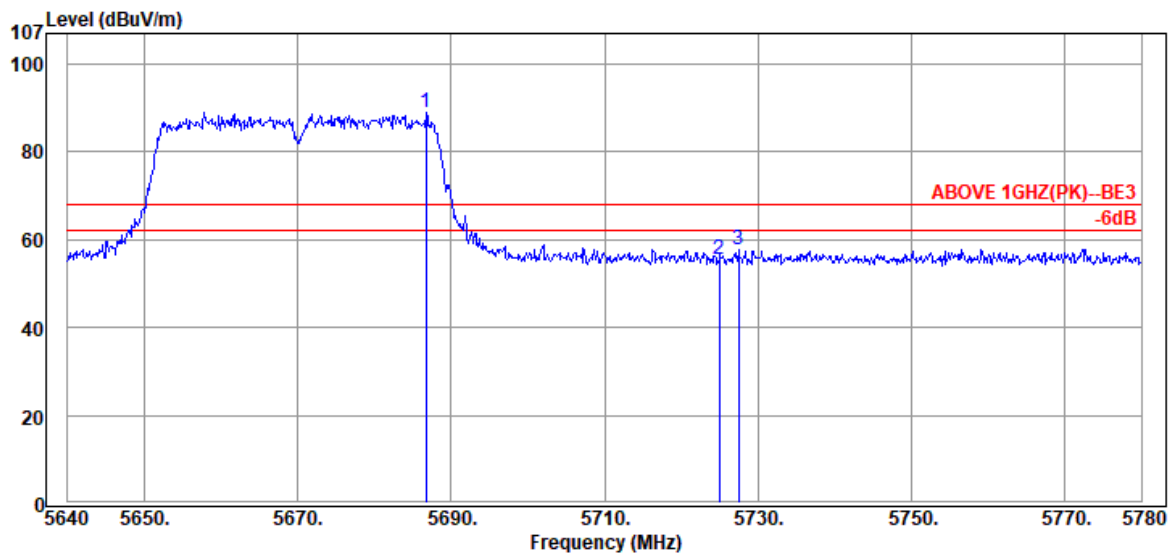

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5686.76	34.45	9.02	45.62	89.09	---	---	Peak
	5724.98	34.40	9.04	11.95	55.39	68.20	12.81	Peak
	5727.50	34.40	9.04	14.35	57.79	68.20	10.41	Peak

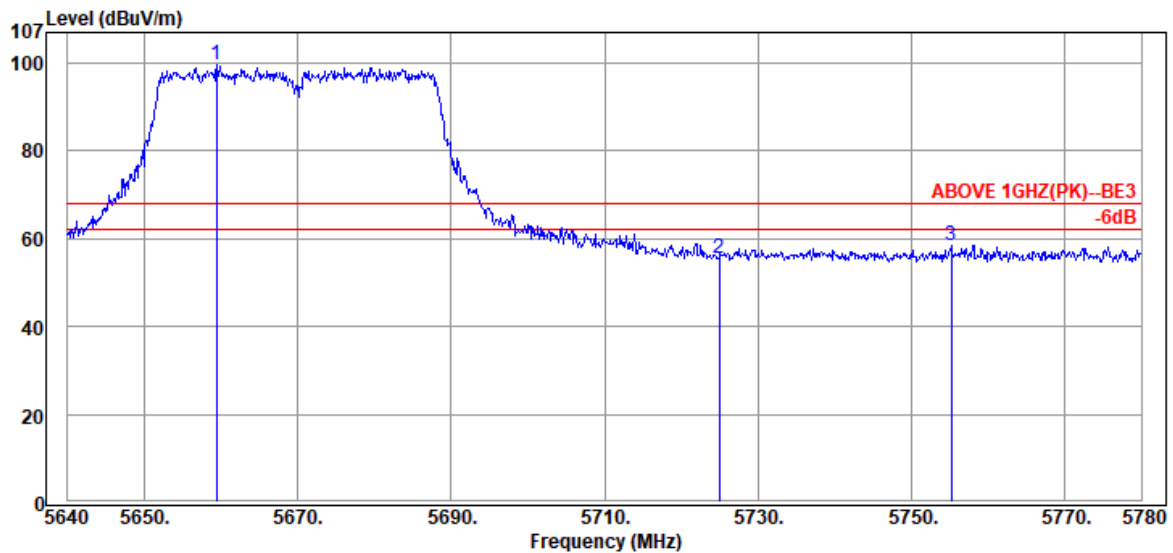

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5659.46	34.56	9.01	56.19	99.76	---	---	Peak
	5724.98	34.40	9.04	11.95	55.39	68.20	12.81	Peak
	5755.22	34.38	9.06	15.05	58.49	68.20	9.71	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

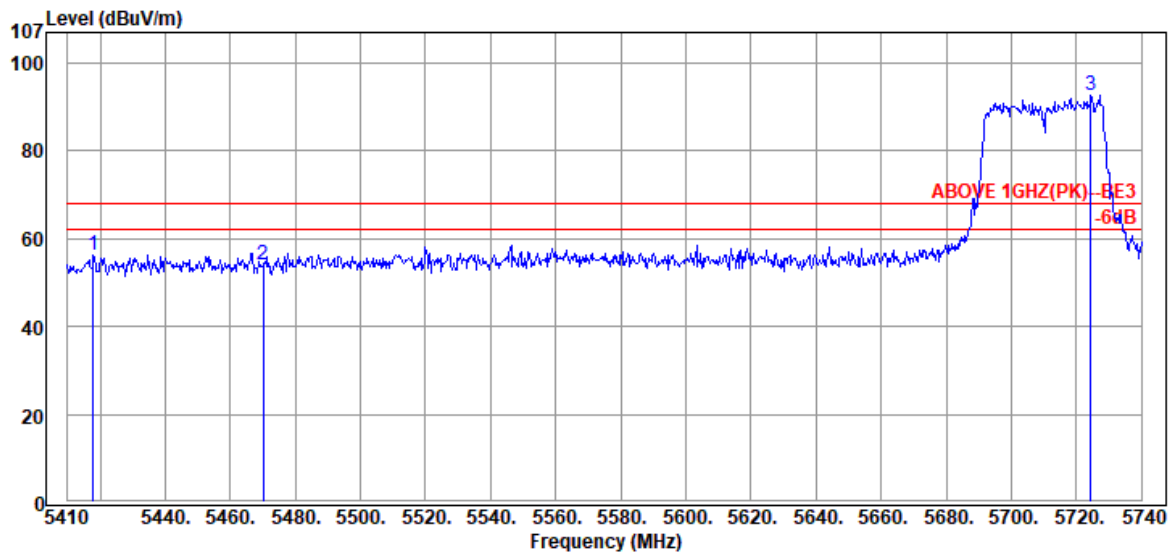

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.92	34.50	8.88	13.02	56.40	68.20	11.80	Peak
5470.06	34.50	8.91	10.72	54.13	68.20	14.07	Peak
@ 5724.49	34.40	9.04	49.11	92.55	---	---	Peak

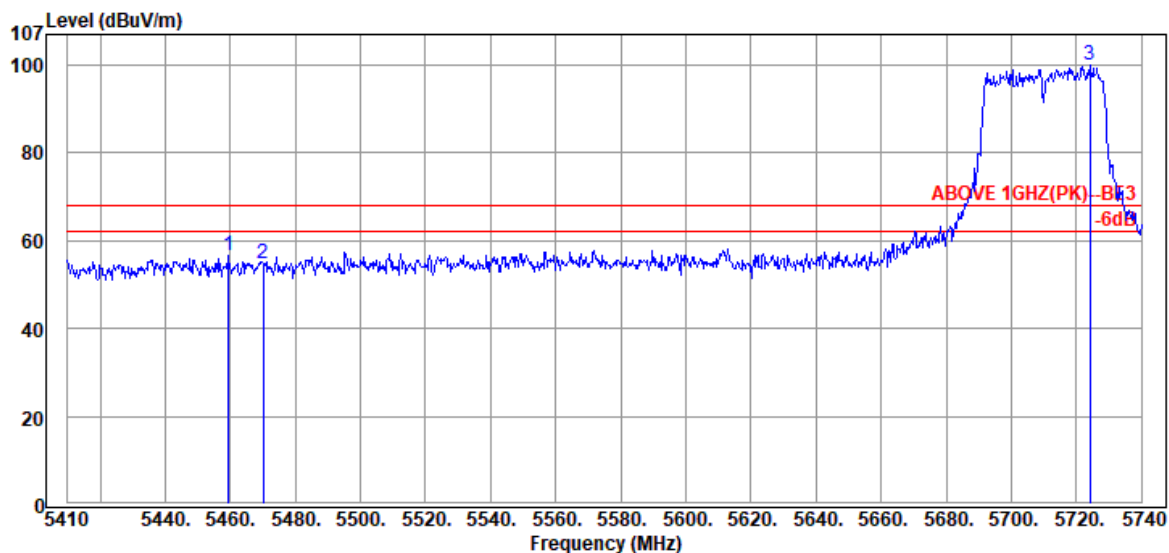

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.50	34.50	8.90	13.11	56.51	68.20	11.69	Peak
5470.06	34.50	8.91	11.42	54.83	68.20	13.37	Peak
@ 5724.16	34.40	9.04	56.46	99.90	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

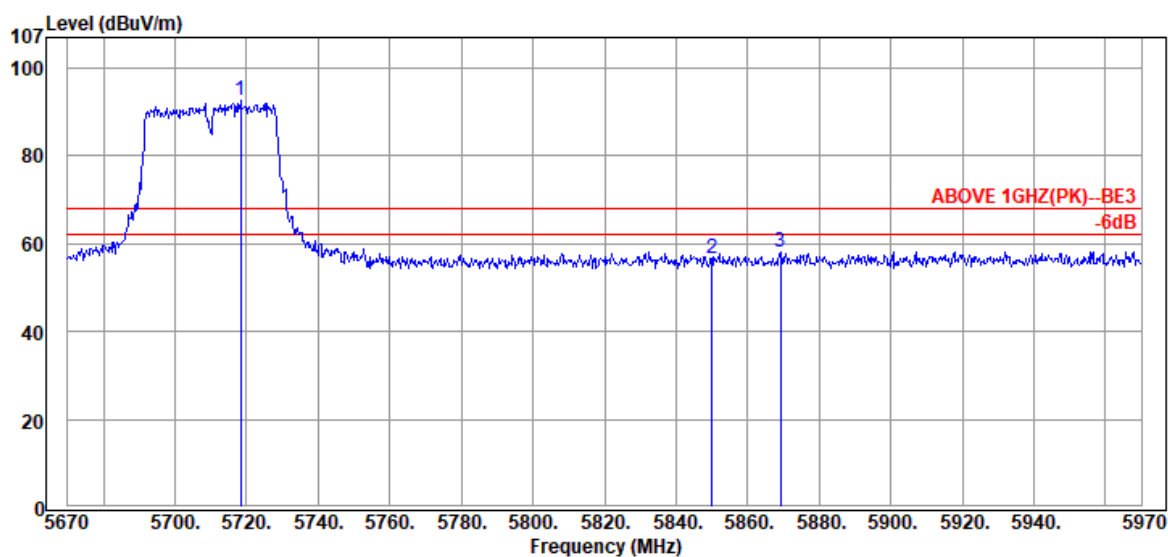

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5718.30	34.40	9.04	49.18	92.62	---	---	Peak
	5850.00	34.40	9.11	13.27	56.78	68.20	11.42	Peak
	5869.20	34.44	9.11	14.55	58.10	68.20	10.10	Peak

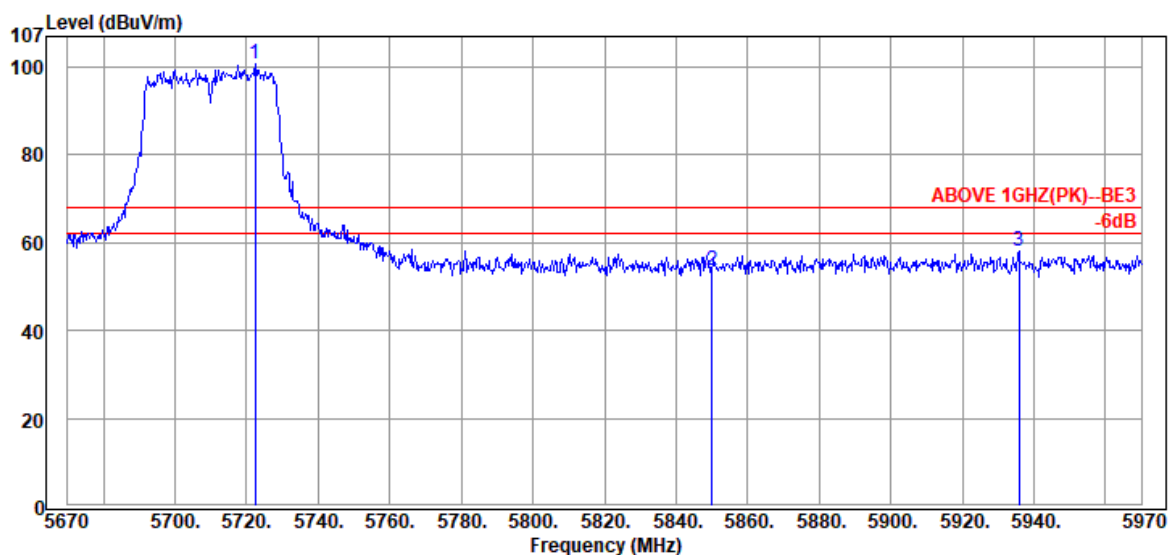

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.50	34.40	9.04	57.43	100.87	---	---	Peak
	5850.00	34.40	9.11	10.31	53.82	68.20	14.38	Peak
	5935.80	34.71	9.15	14.14	58.00	68.20	10.20	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

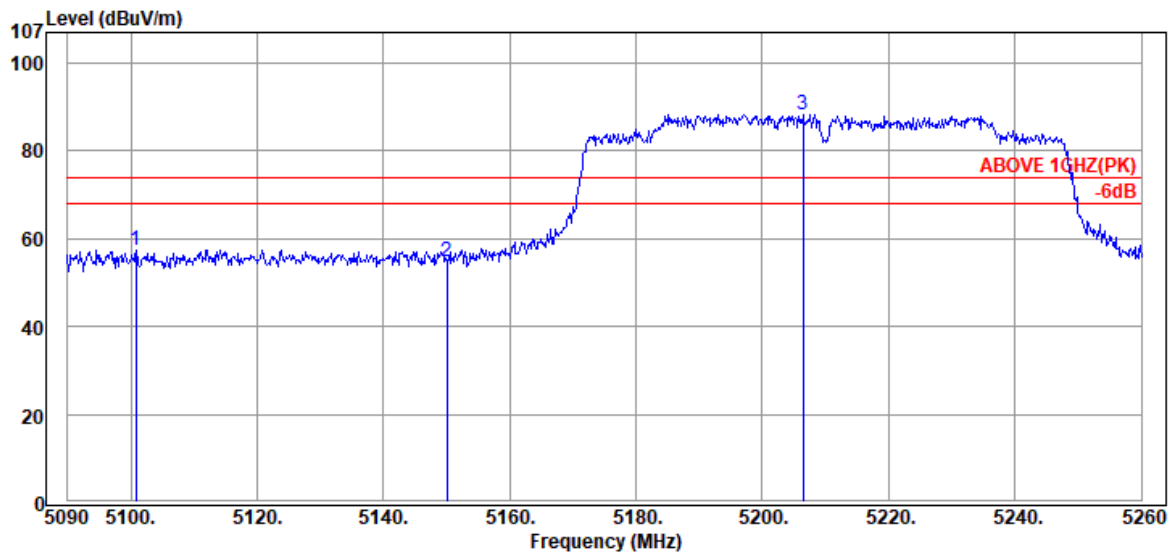

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.88	33.80	8.70	15.03	57.53	74.00	16.47	Peak
5150.01	33.90	8.73	12.24	54.87	74.00	19.13	Peak
@ 5206.45	34.14	8.76	45.36	88.26	---	---	Peak

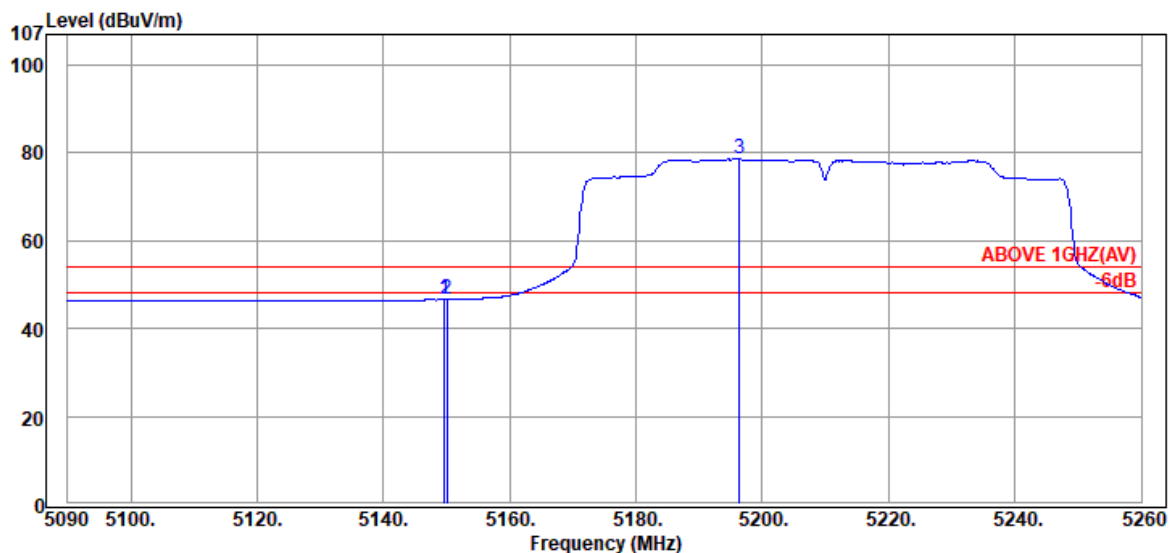

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	4.01	46.64	54.00	7.36	Average
5150.01	33.90	8.73	3.97	46.60	54.00	7.40	Average
@ 5196.42	34.09	8.75	35.70	78.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

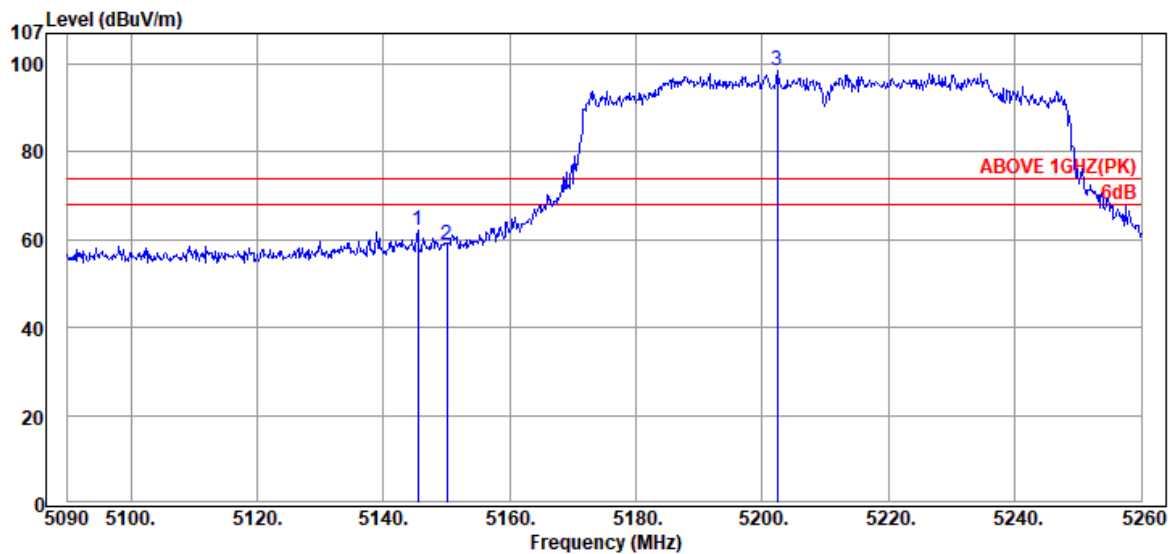

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.42	33.89	8.72	19.70	62.31	74.00	11.69	Peak
5150.01	33.90	8.73	16.15	58.78	74.00	15.22	Peak
@ 5202.37	34.11	8.76	55.62	98.49	---	---	Peak

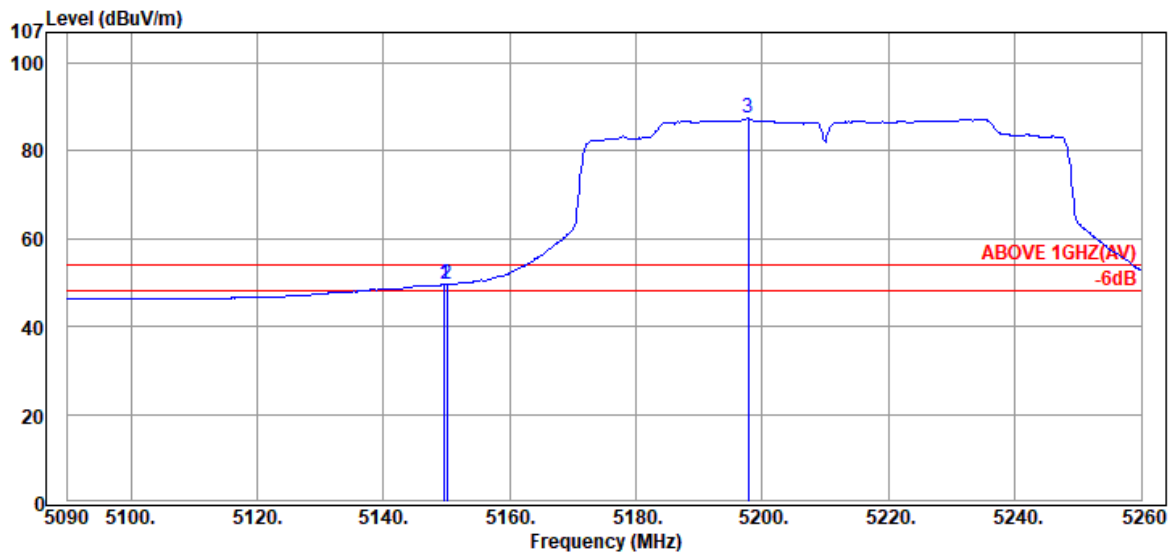

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	6.88	49.51	54.00	4.49	Average
5150.01	33.90	8.73	6.85	49.48	54.00	4.52	Average
@ 5197.78	34.09	8.75	44.59	87.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

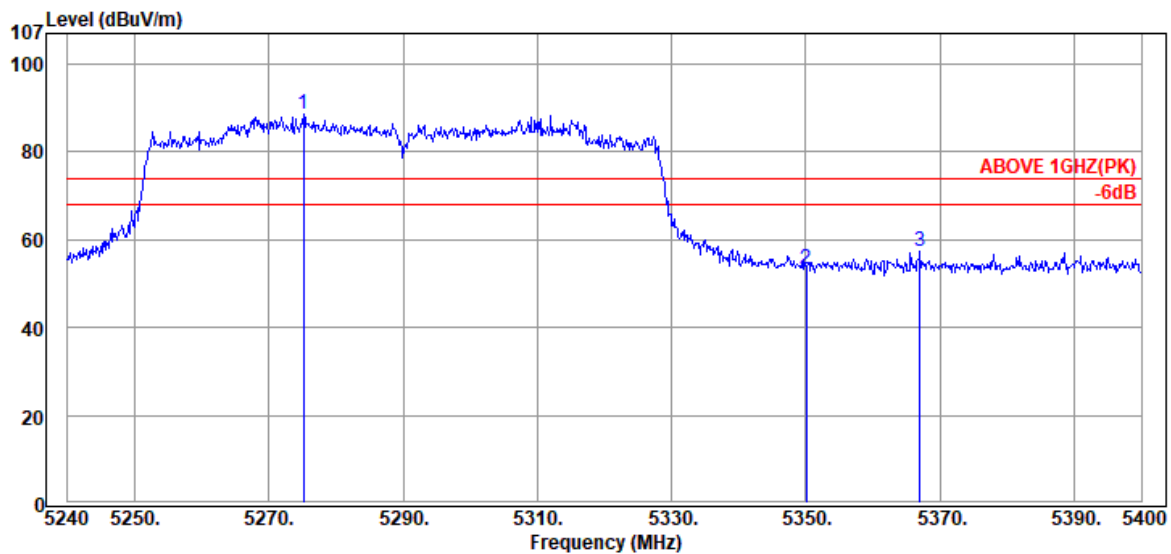

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5275.20	34.45	8.80	45.44	88.69	---	---	Peak
	5350.08	34.50	8.84	9.88	53.22	74.00	20.78	Peak
	5367.04	34.50	8.85	13.91	57.26	74.00	16.74	Peak

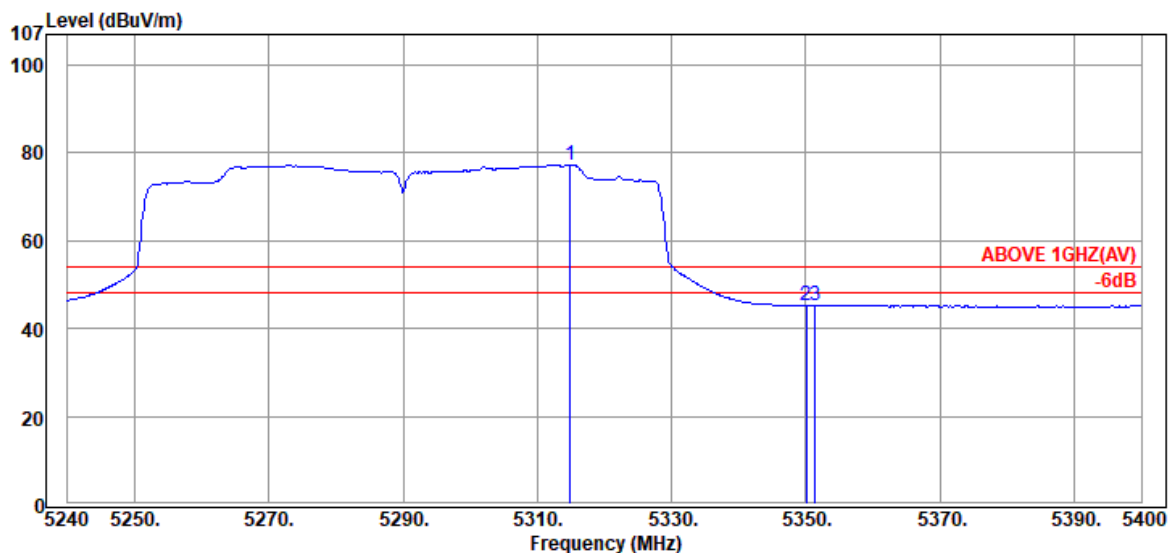

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.88	34.50	8.82	34.05	77.37	---	---	Average
	5350.08	34.50	8.84	1.94	45.28	54.00	8.72	Average
	5351.36	34.50	8.84	1.92	45.26	54.00	8.74	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

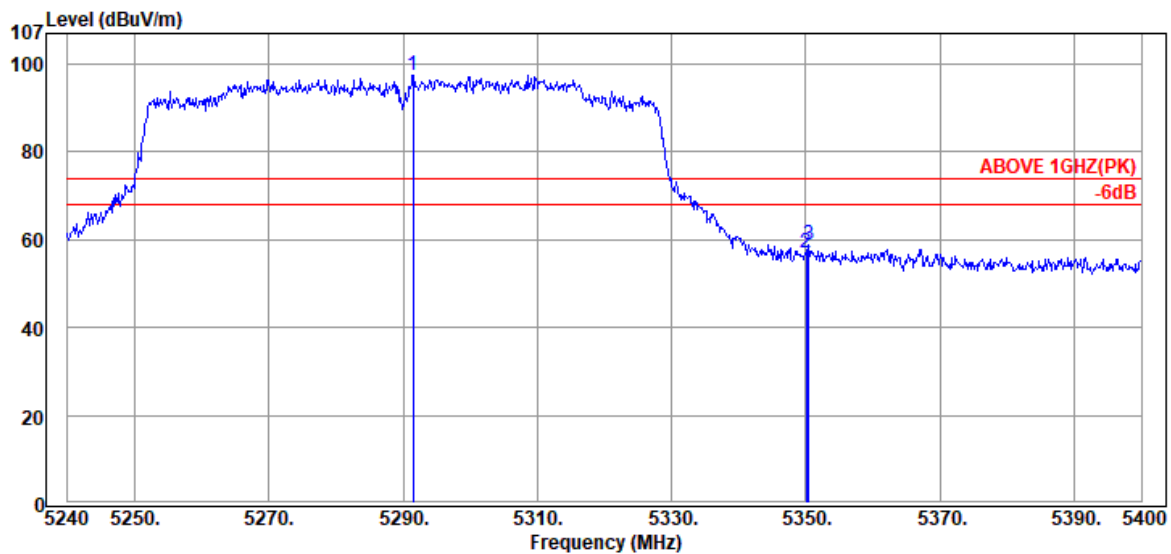

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5291.52	34.48	8.81	54.20	97.49	---	---	Peak
	5350.08	34.50	8.84	13.60	56.94	74.00	17.06	Peak
	5350.40	34.50	8.84	15.55	58.89	74.00	15.11	Peak

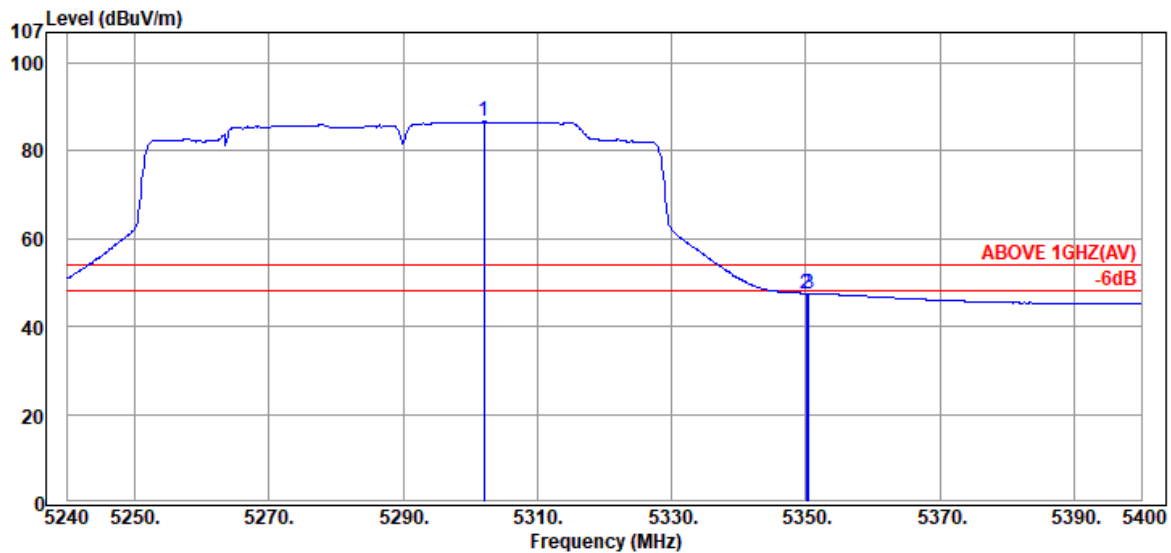

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5302.08	34.50	8.81	43.41	86.72	---	---	Average
	5350.08	34.50	8.84	4.20	47.54	54.00	6.46	Average
	5350.40	34.50	8.84	4.22	47.56	54.00	6.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

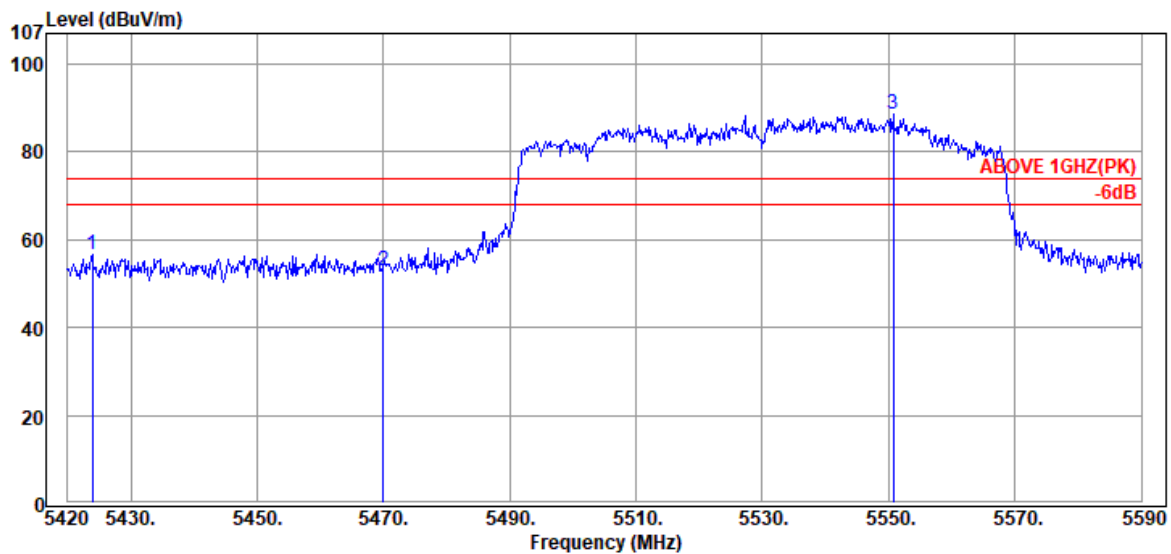

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.91	34.50	8.88	13.32	56.70	74.00	17.30	Peak
5469.98	34.50	8.91	9.71	53.12	74.00	20.88	Peak
@ 5550.73	34.60	8.95	45.12	88.67	---	---	Peak

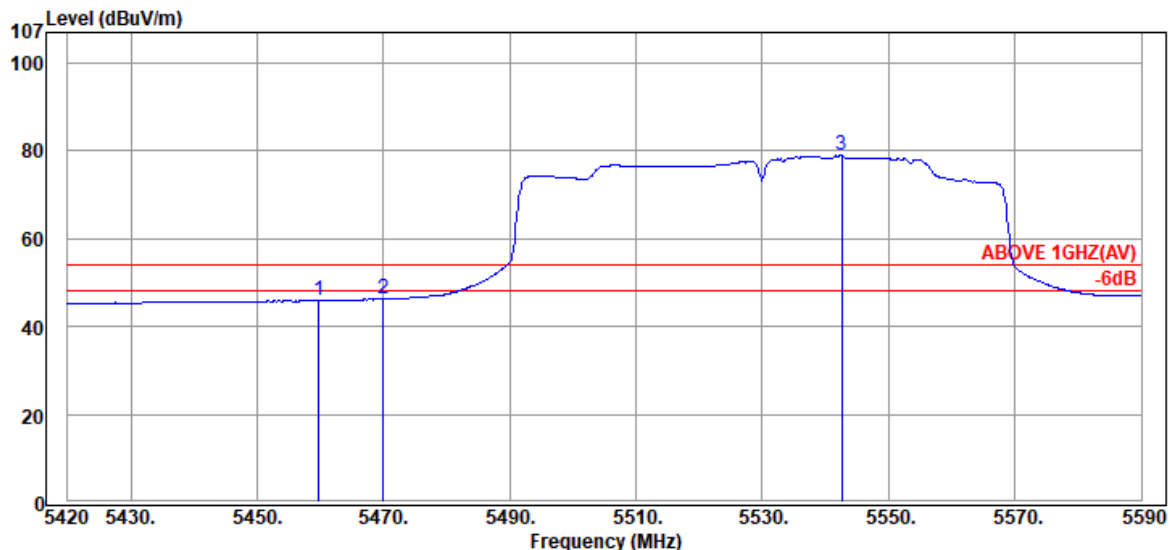

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.78	34.50	8.90	2.49	45.89	54.00	8.11	Average
5469.98	34.50	8.91	2.81	46.22	54.00	7.78	Average
@ 5542.57	34.59	8.95	35.46	79.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

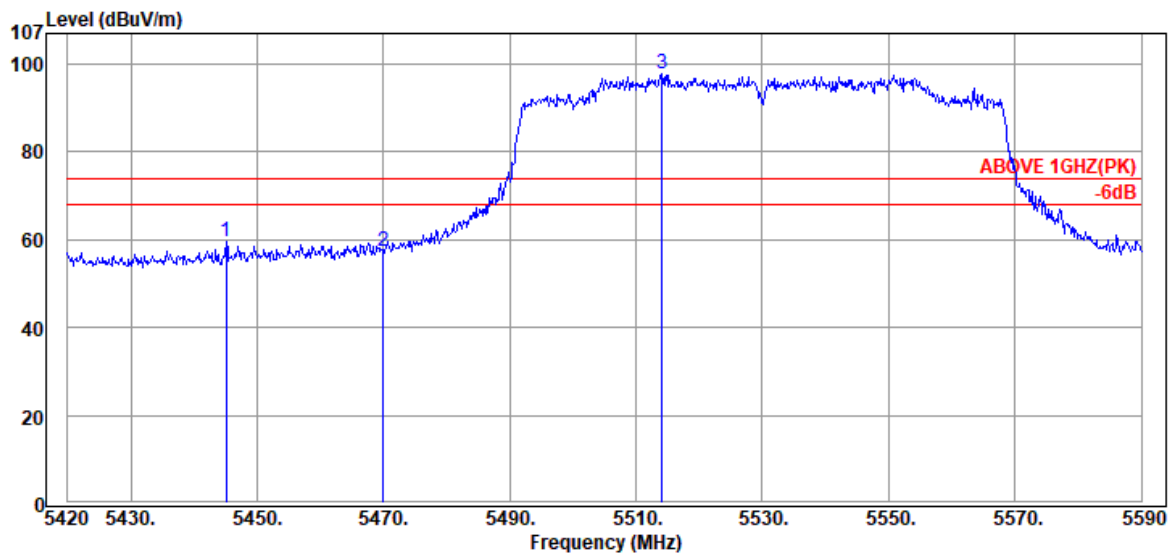

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.16	34.50	8.89	16.06	59.45	74.00	14.55	Peak
5469.98	34.50	8.91	14.02	57.43	74.00	16.57	Peak
@ 5514.18	34.53	8.93	54.49	97.95	---	---	Peak

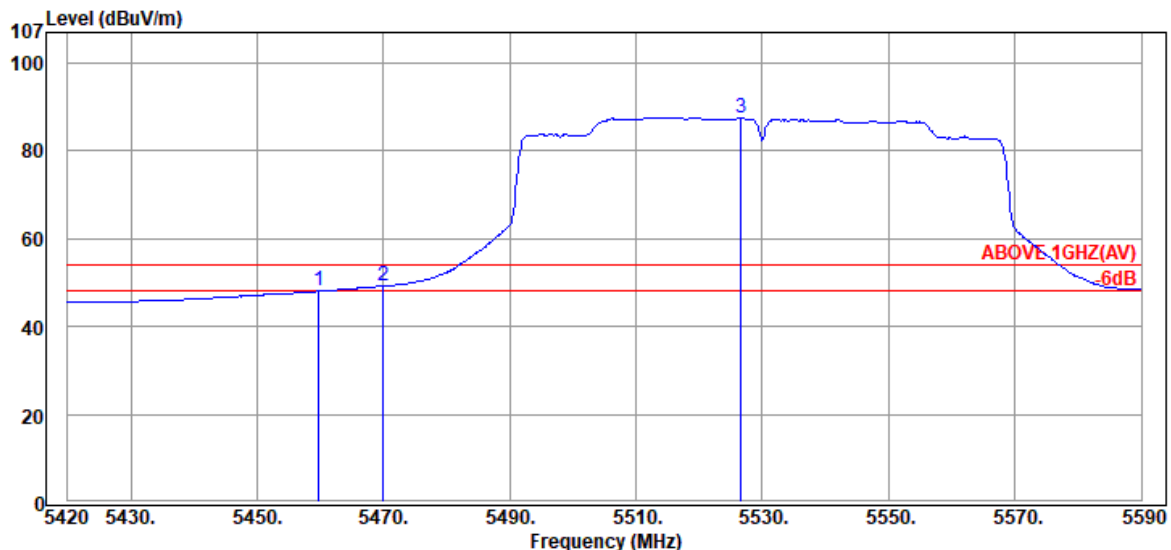

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.78	34.50	8.90	4.69	48.09	54.00	5.91	Average
5469.98	34.50	8.91	5.88	49.29	54.00	4.71	Average
@ 5526.59	34.55	8.94	44.05	87.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

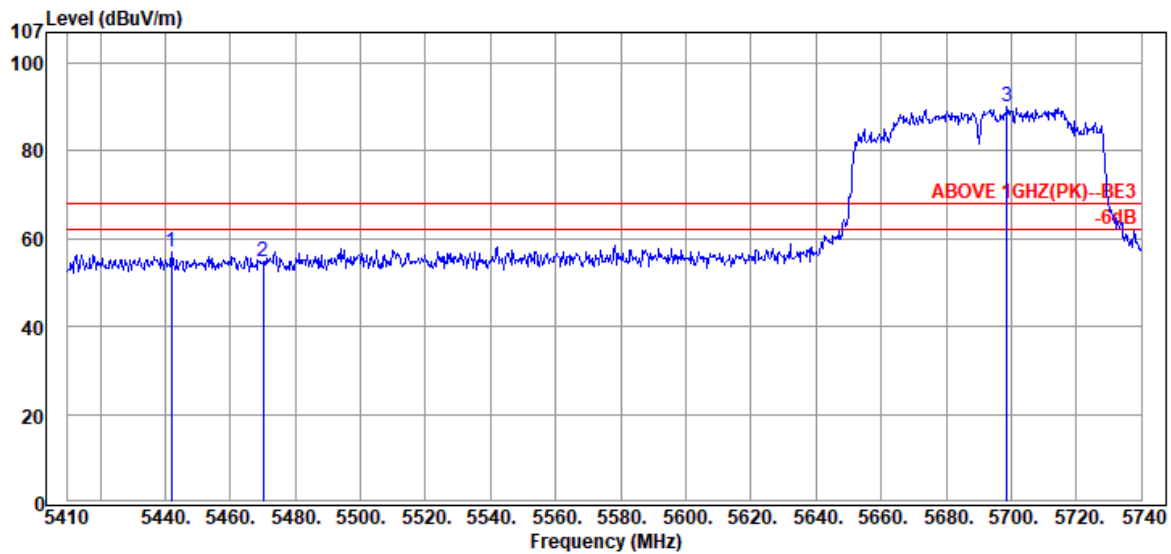

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.01	34.50	8.89	13.56	56.95	68.20	11.25	Peak
5470.06	34.50	8.91	11.30	54.71	68.20	13.49	Peak
@ 5698.75	34.41	9.03	46.54	89.98	---	---	Peak

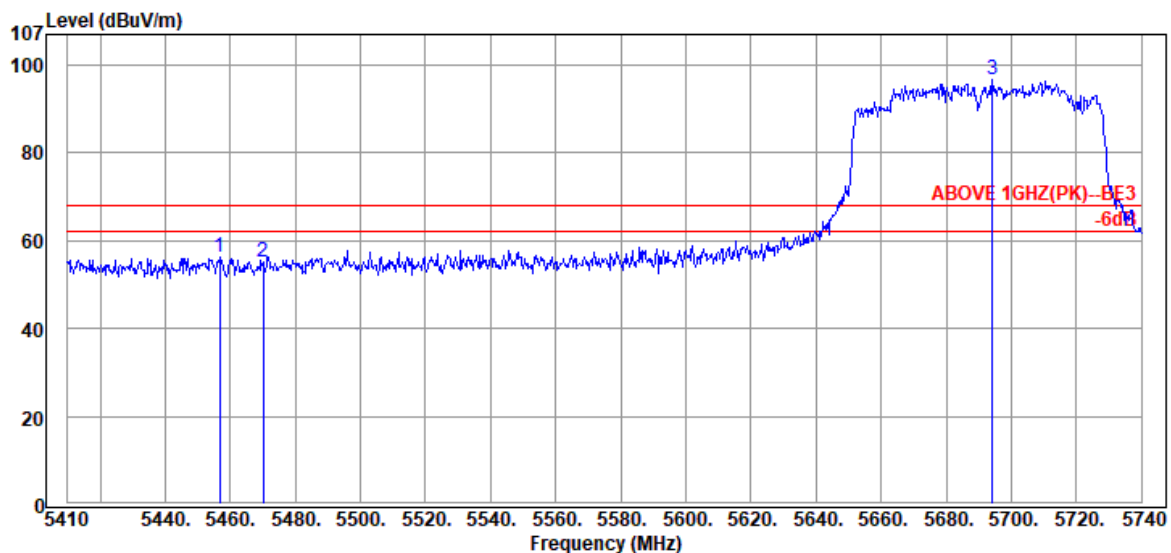

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.86	34.50	8.90	12.84	56.24	68.20	11.96	Peak
5470.06	34.50	8.91	11.92	55.33	68.20	12.87	Peak
@ 5694.13	34.42	9.03	53.42	96.87	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

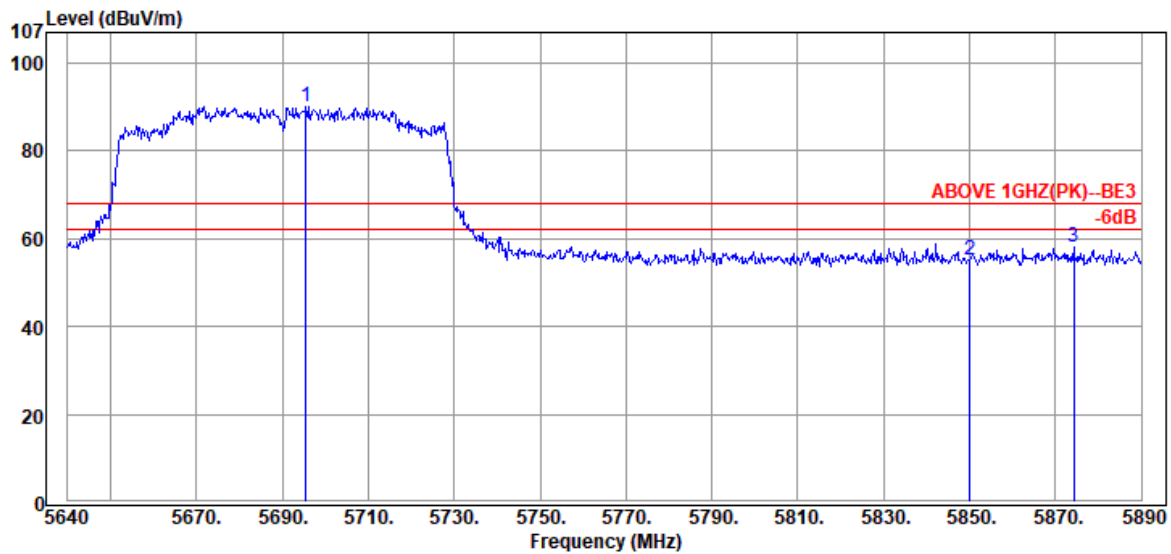

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5695.50	34.42	9.03	46.80	90.25	---	---	Peak
	5850.00	34.40	9.11	11.56	55.07	68.20	13.13	Peak
	5874.25	34.45	9.12	14.36	57.93	68.20	10.27	Peak

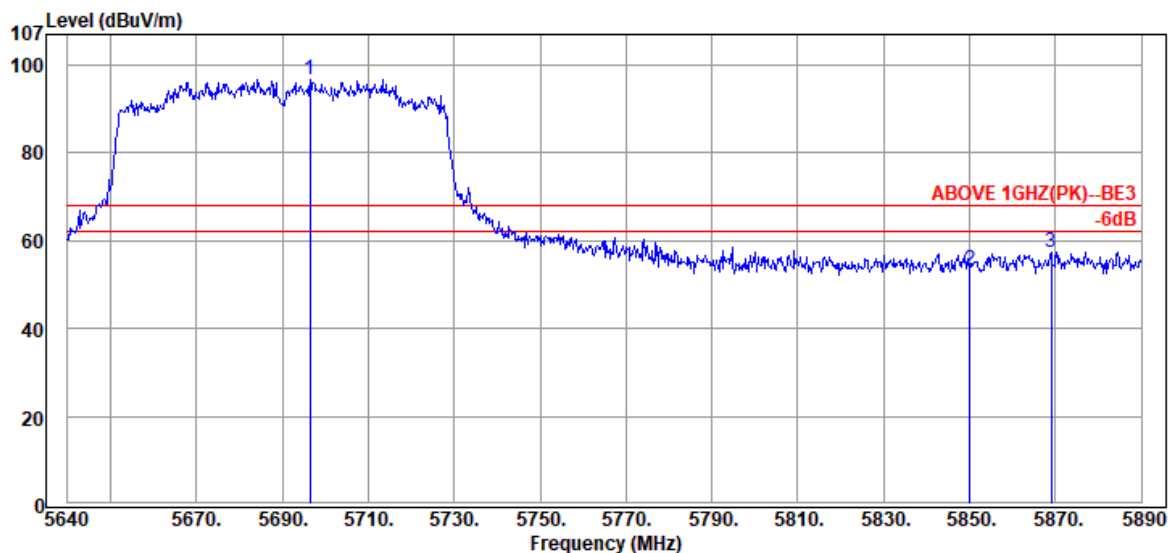

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5696.50	34.41	9.03	53.24	96.68	---	---	Peak
	5850.00	34.40	9.11	9.76	53.27	68.20	14.93	Peak
	5869.00	34.44	9.11	13.86	57.41	68.20	10.79	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

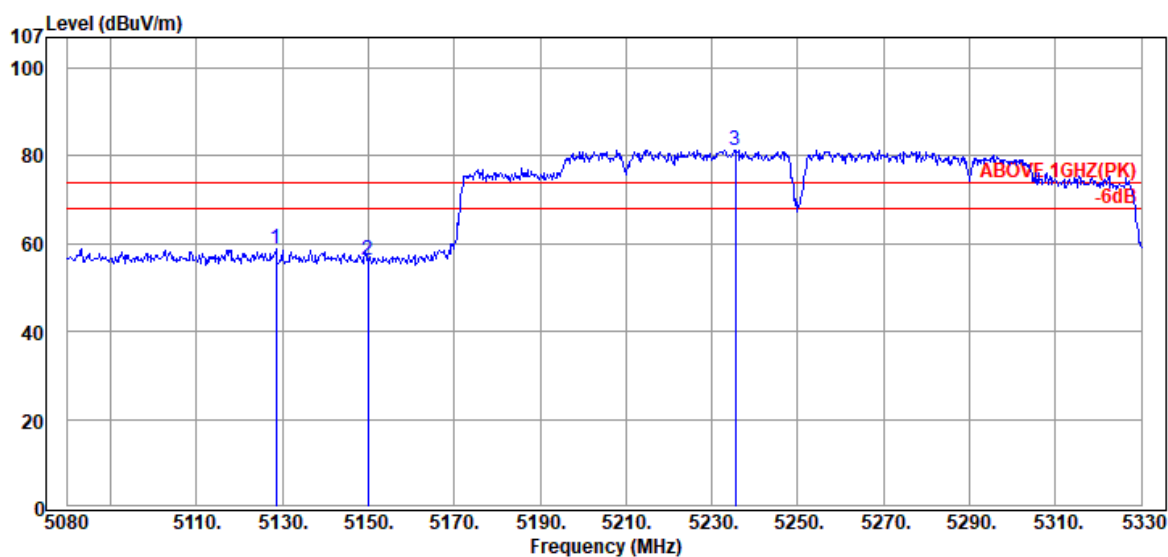

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.50	33.86	8.72	16.41	58.99	74.00	15.01	Peak
5150.00	33.90	8.73	13.45	56.08	74.00	17.92	Peak
@ 5235.50	34.31	8.78	38.34	81.43	---	---	Peak

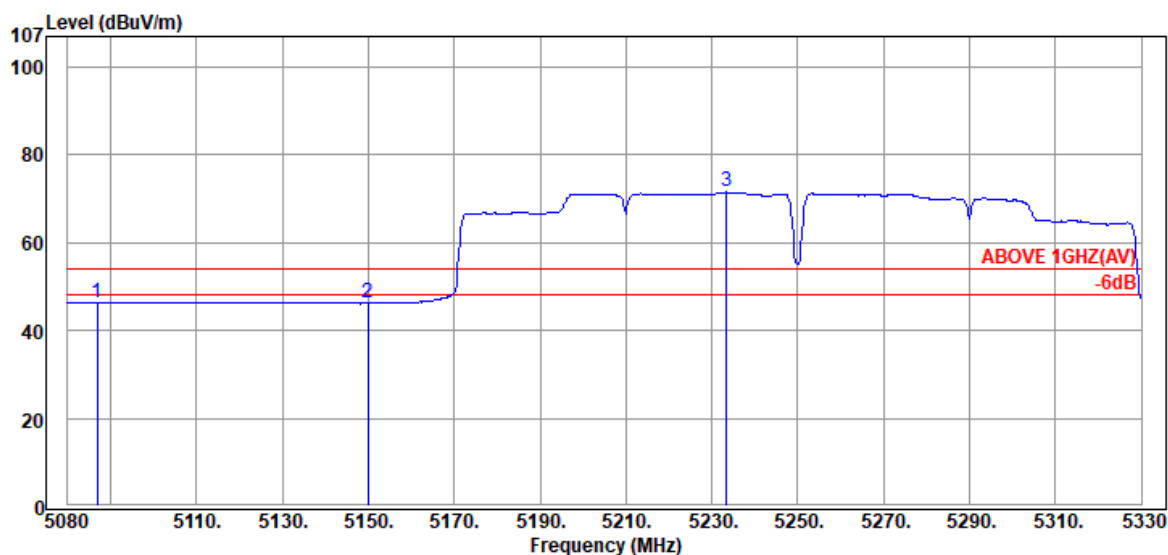

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5087.00	33.80	8.69	3.98	46.47	54.00	7.53	Average
5150.00	33.90	8.73	3.56	46.19	54.00	7.81	Average
@ 5233.50	34.30	8.78	28.57	71.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

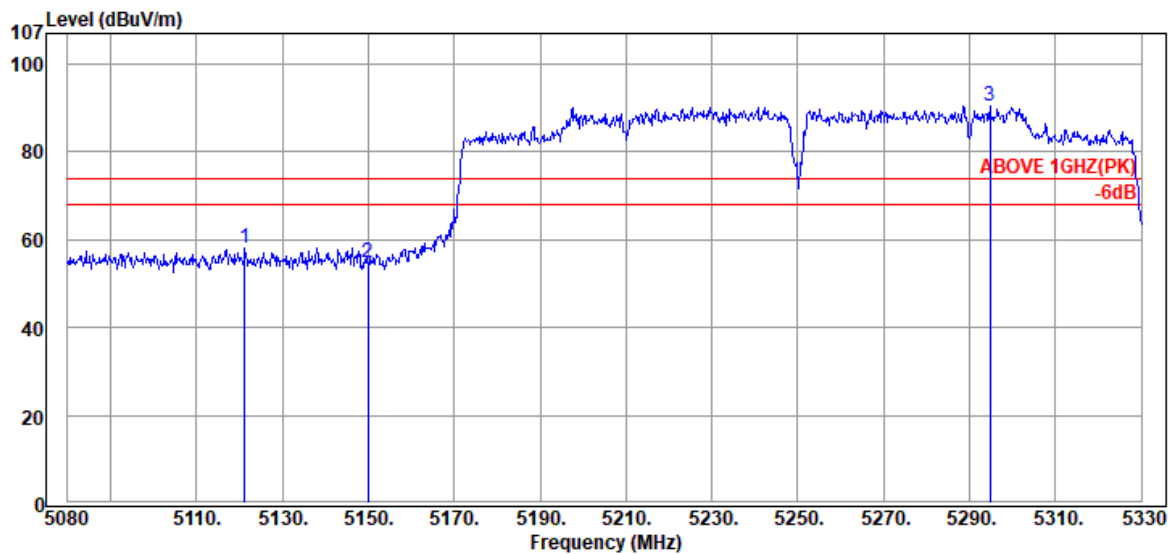

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.25	33.84	8.71	15.63	58.18	74.00	15.82	Peak
5150.00	33.90	8.73	12.13	54.76	74.00	19.24	Peak
@ 5294.75	34.49	8.81	47.28	90.58	---	---	Peak

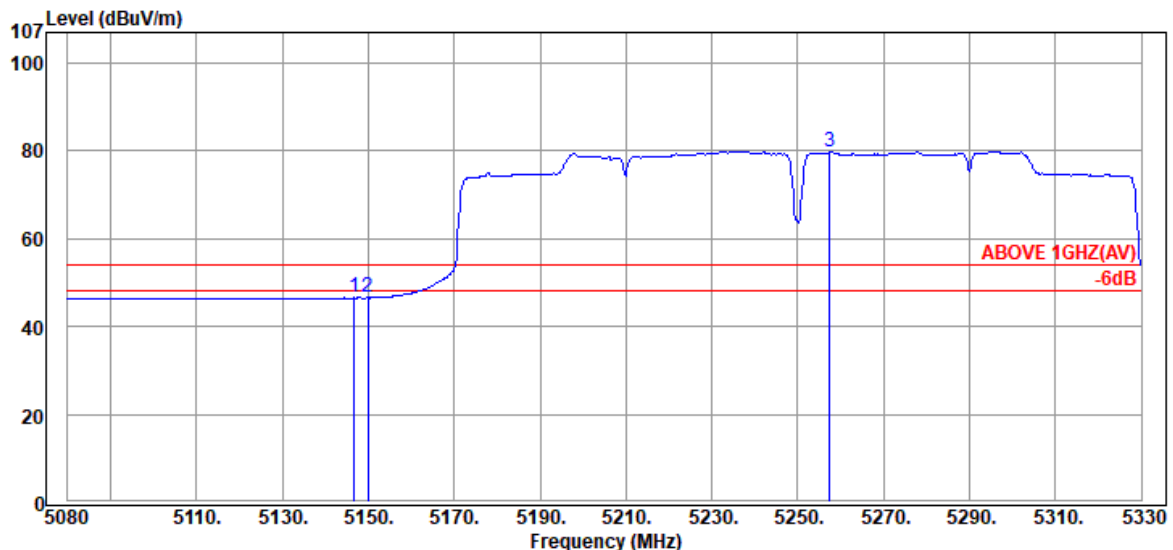

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.75	33.89	8.73	3.93	46.55	54.00	7.45	Average
5150.00	33.90	8.73	3.90	46.53	54.00	7.47	Average
@ 5257.50	34.42	8.79	36.71	79.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

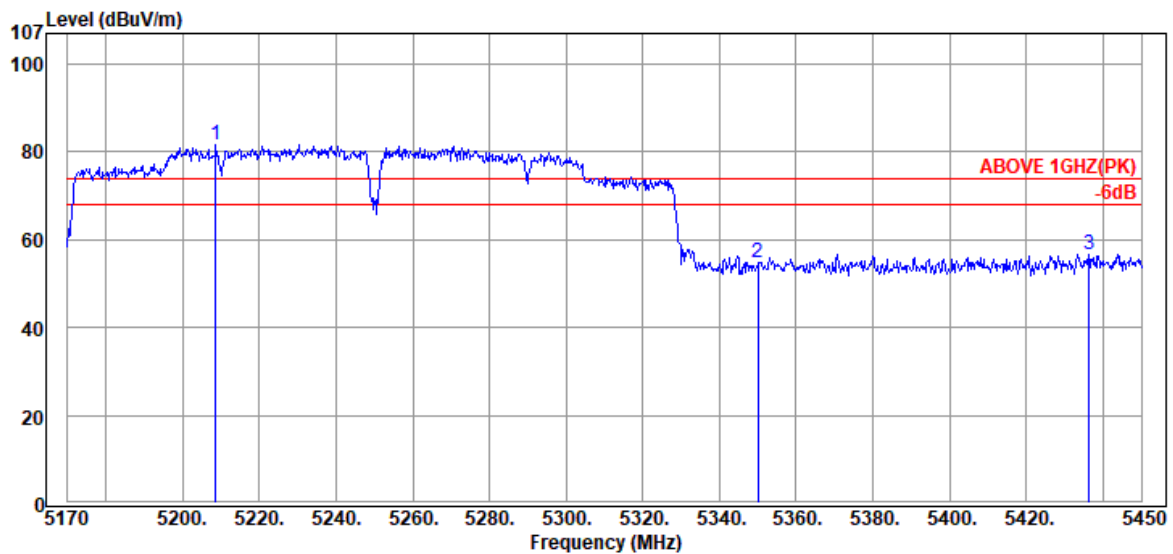

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5208.64	34.15	8.76	38.67	81.58	---	---	Peak
	5350.04	34.50	8.84	11.62	54.96	74.00	19.04	Peak
	5436.28	34.50	8.89	13.42	56.81	74.00	17.19	Peak

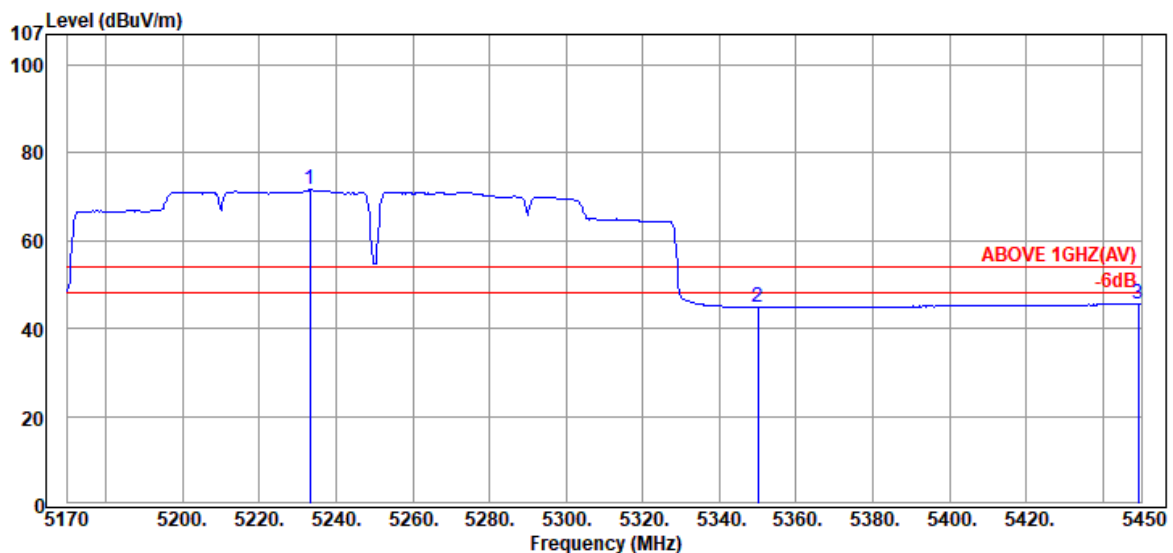

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5233.28	34.30	8.78	28.66	71.74	---	---	Average
	5350.04	34.50	8.84	1.56	44.90	54.00	9.10	Average
	5449.16	34.50	8.89	2.18	45.57	54.00	8.43	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

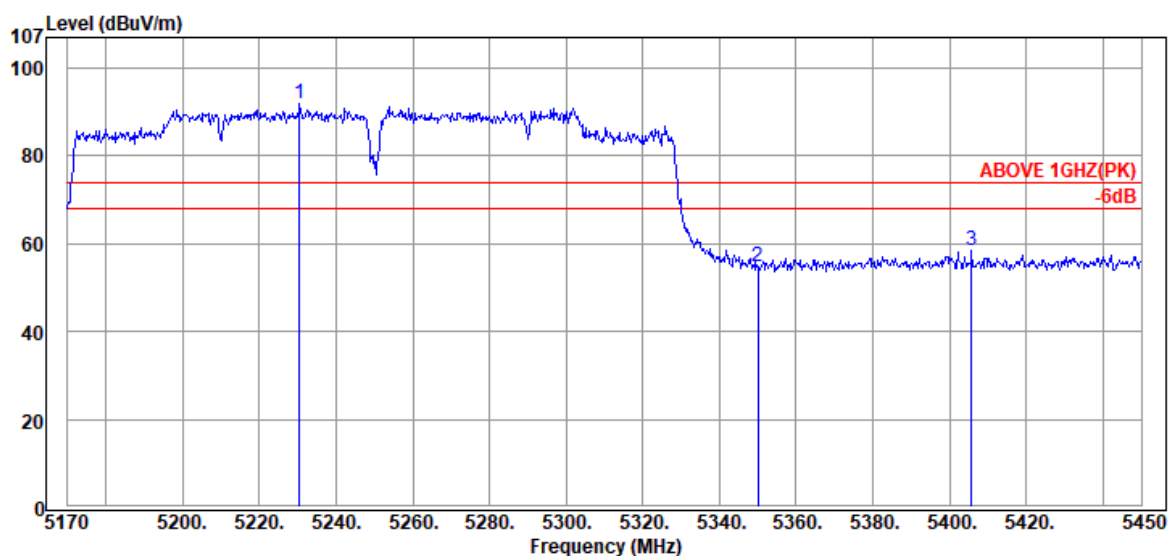

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5230.48	34.28	8.77	48.70	91.75	---	---	Peak
	5350.04	34.50	8.84	11.32	54.66	74.00	19.34	Peak
	5405.76	34.50	8.87	15.20	58.57	74.00	15.43	Peak

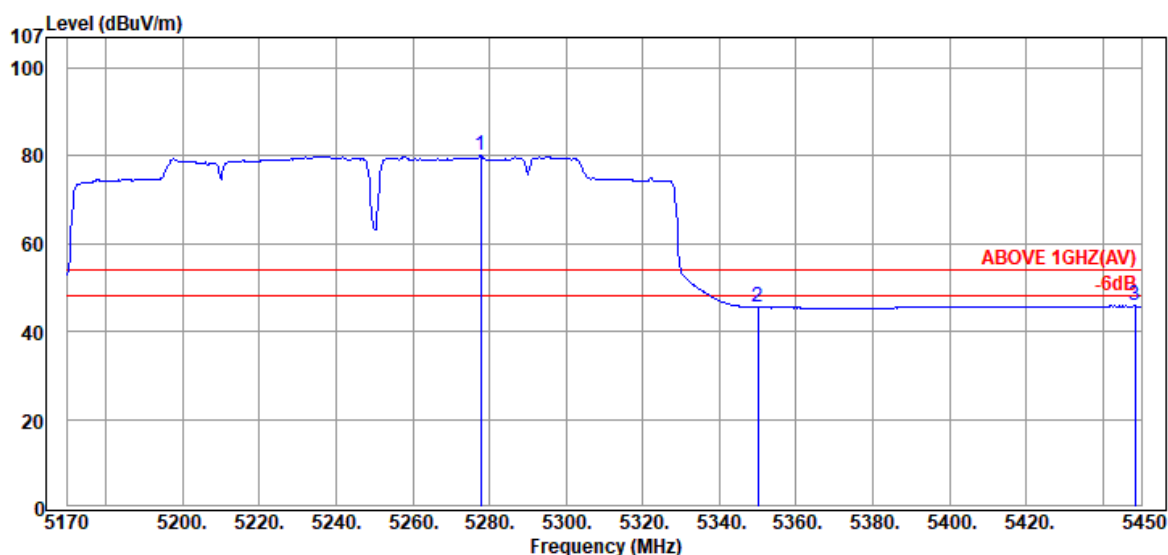

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5277.80	34.46	8.80	36.81	80.07	---	---	Average
	5350.04	34.50	8.84	2.14	45.48	54.00	8.52	Average
	5448.32	34.50	8.89	2.43	45.82	54.00	8.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

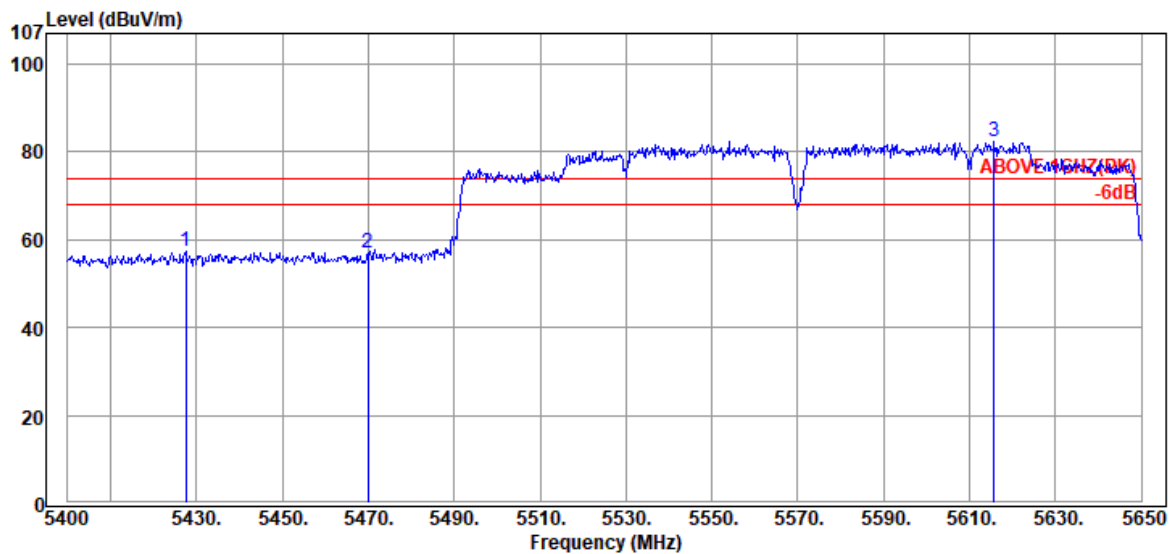

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.50	34.50	8.88	13.86	57.24	74.00	16.76	Peak
5470.00	34.50	8.91	13.57	56.98	74.00	17.02	Peak
@ 5615.75	34.67	8.98	38.77	82.42	---	---	Peak

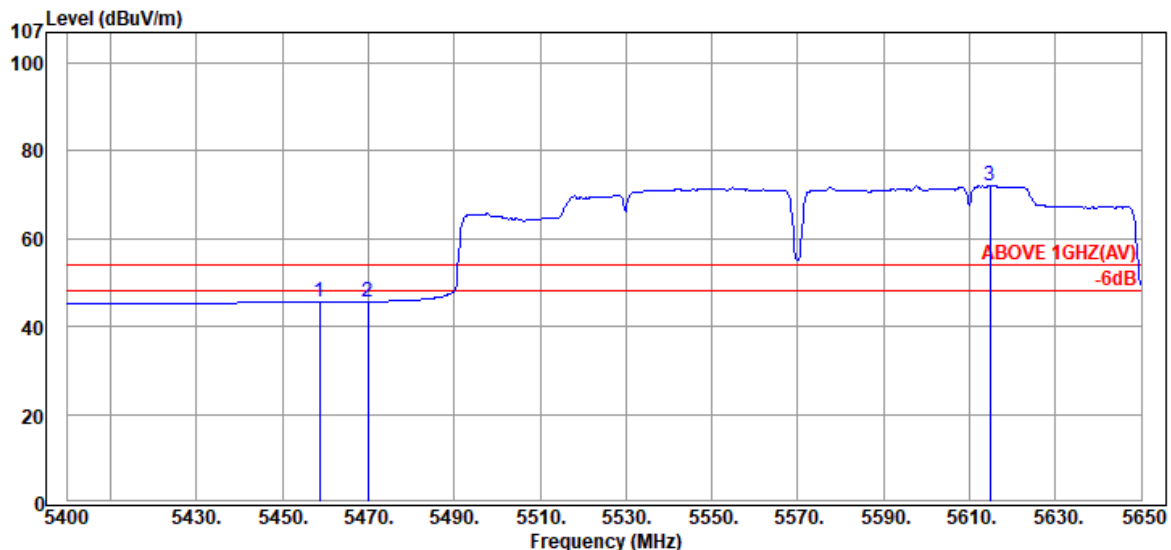

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.75	34.50	8.90	2.25	45.65	54.00	8.35	Average
5470.00	34.50	8.91	2.30	45.71	54.00	8.29	Average
@ 5614.75	34.67	8.98	28.33	71.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

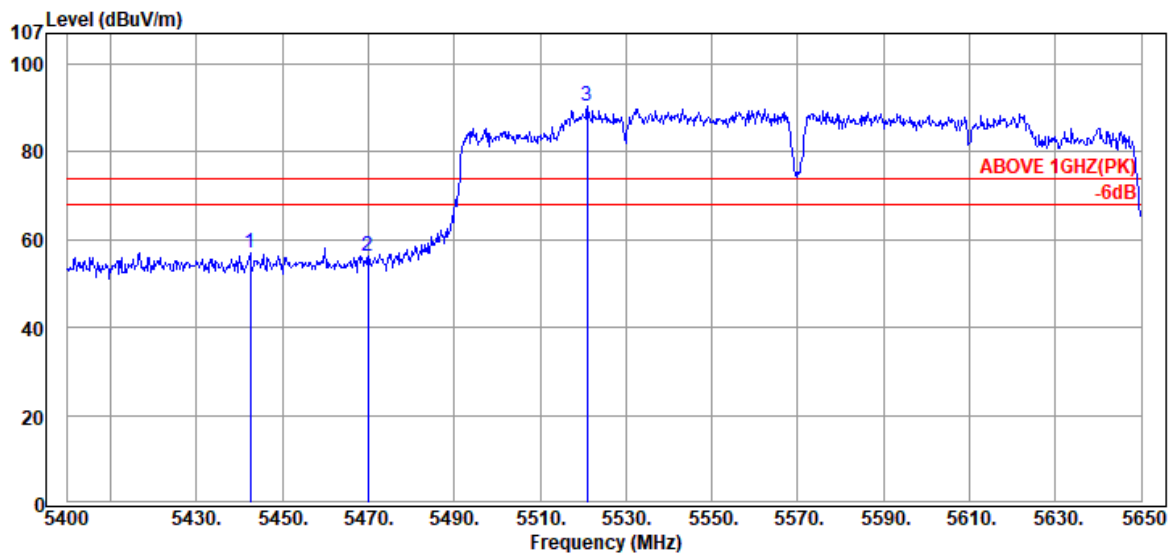

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5442.50	34.50	8.89	13.56	56.95	74.00	17.05	Peak
5470.00	34.50	8.91	13.01	56.42	74.00	17.58	Peak
@ 5521.00	34.54	8.93	46.98	90.45	---	---	Peak

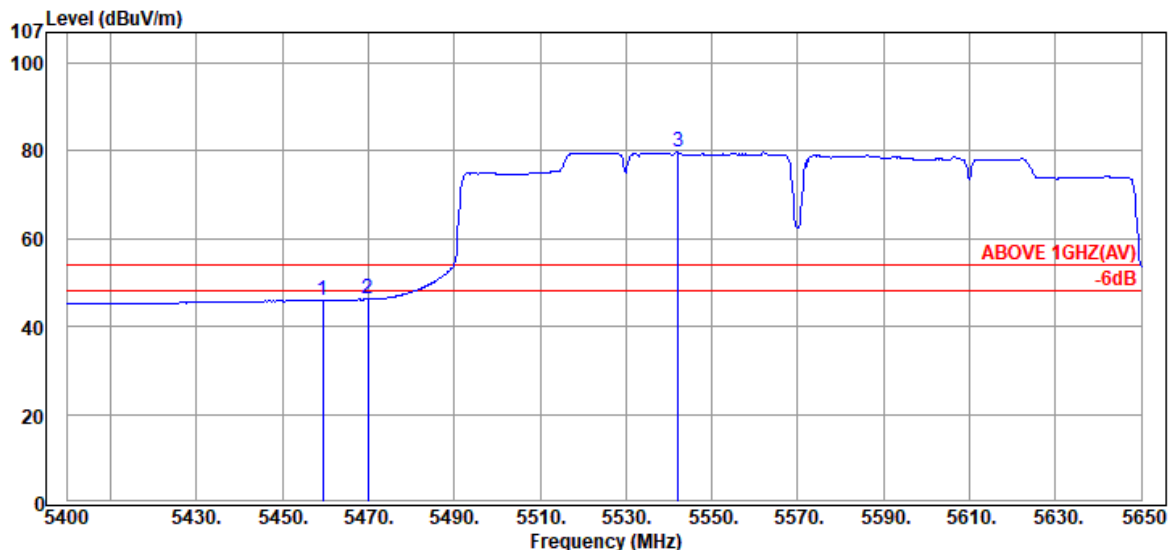

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.50	34.50	8.90	2.59	45.99	54.00	8.01	Average
5470.00	34.50	8.91	2.77	46.18	54.00	7.82	Average
@ 5542.25	34.58	8.94	36.45	79.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	UNII Band	II-2C
		Frequency	TX 5570MHz

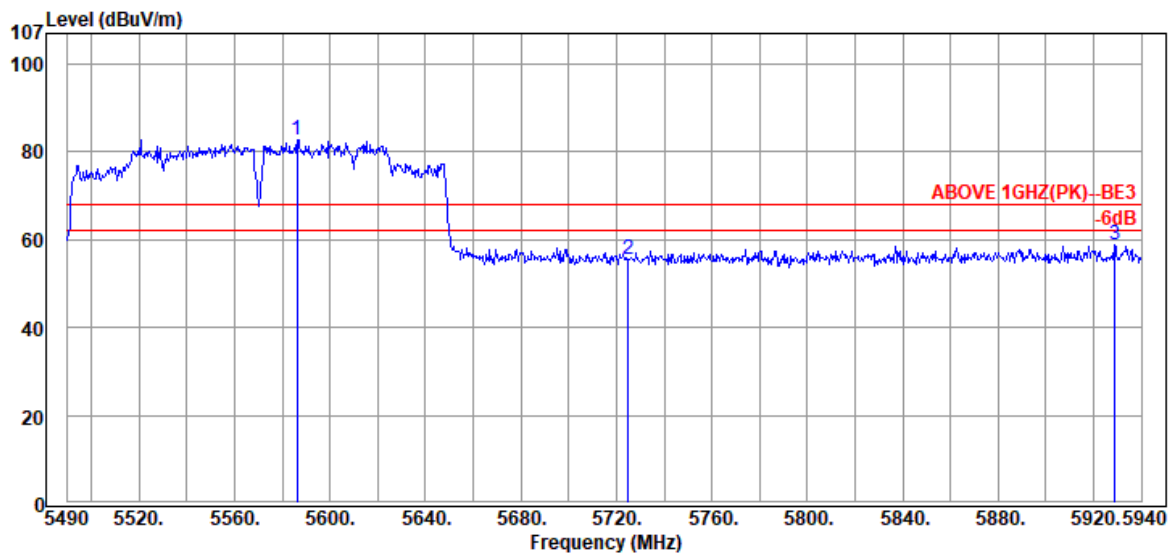

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5586.30	34.67	8.97	39.24	82.88	---	---	Peak
	5724.90	34.40	9.04	12.13	55.57	68.20	12.63	Peak
	5928.75	34.67	9.14	14.85	58.66	68.20	9.54	Peak

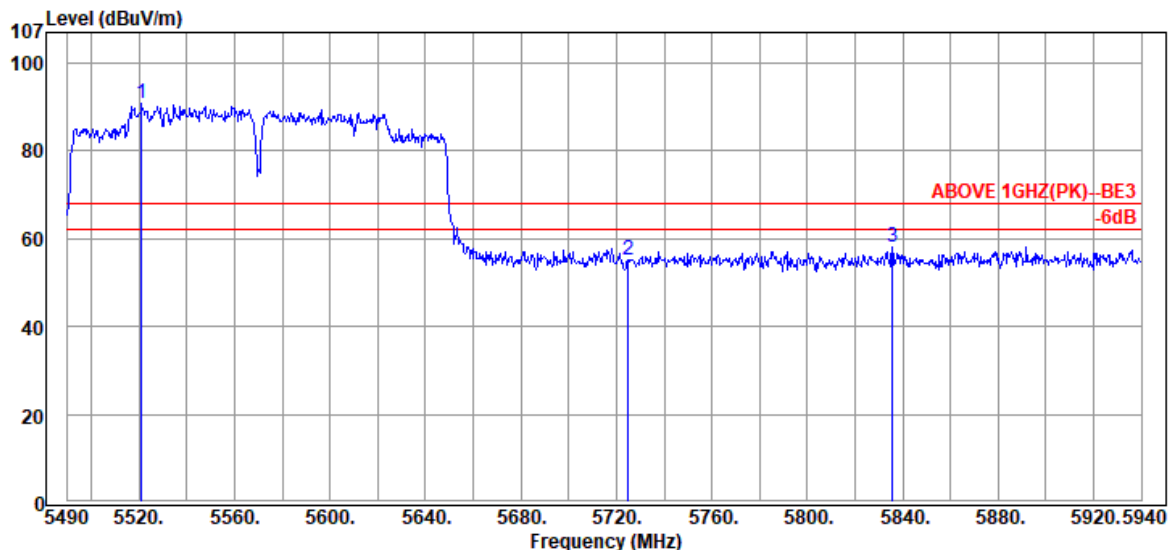

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5521.05	34.54	8.93	47.18	90.65	---	---	Peak
	5724.90	34.40	9.04	11.71	55.15	68.20	13.05	Peak
	5835.60	34.34	9.10	14.62	58.06	68.20	10.14	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
		Frequency	TX 5180MHz

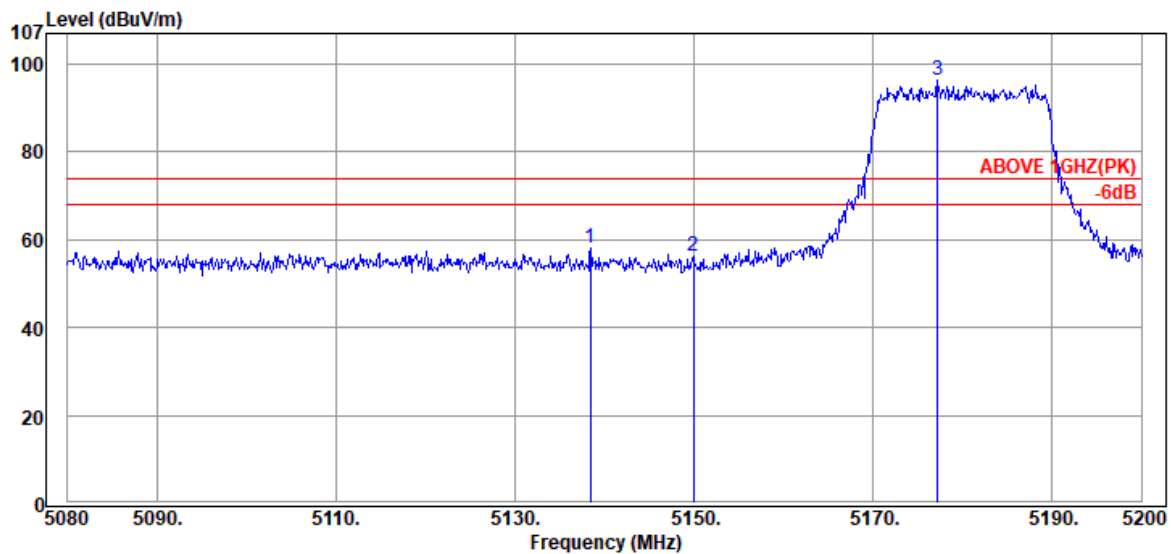

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.44	33.88	8.72	15.38	57.98	74.00	16.02	Peak
5149.96	33.90	8.73	13.75	56.38	74.00	17.62	Peak
@ 5177.20	34.01	8.74	53.42	96.17	---	---	Peak

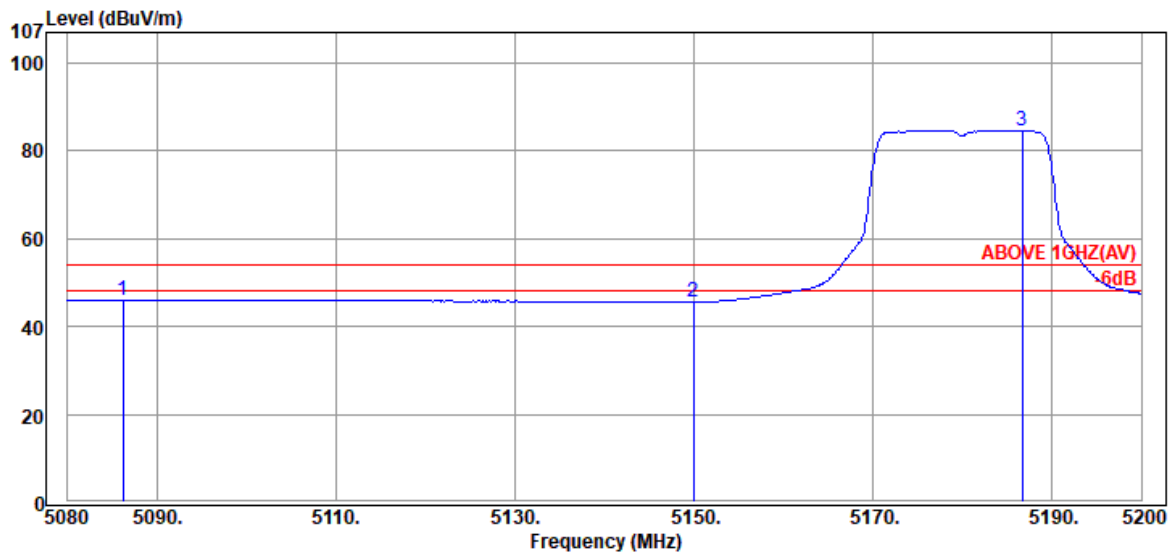

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5086.24	33.80	8.69	3.49	45.98	54.00	8.02	Average
5149.96	33.90	8.73	3.09	45.72	54.00	8.28	Average
@ 5186.68	34.05	8.75	41.77	84.57	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
		Frequency	TX 5180MHz

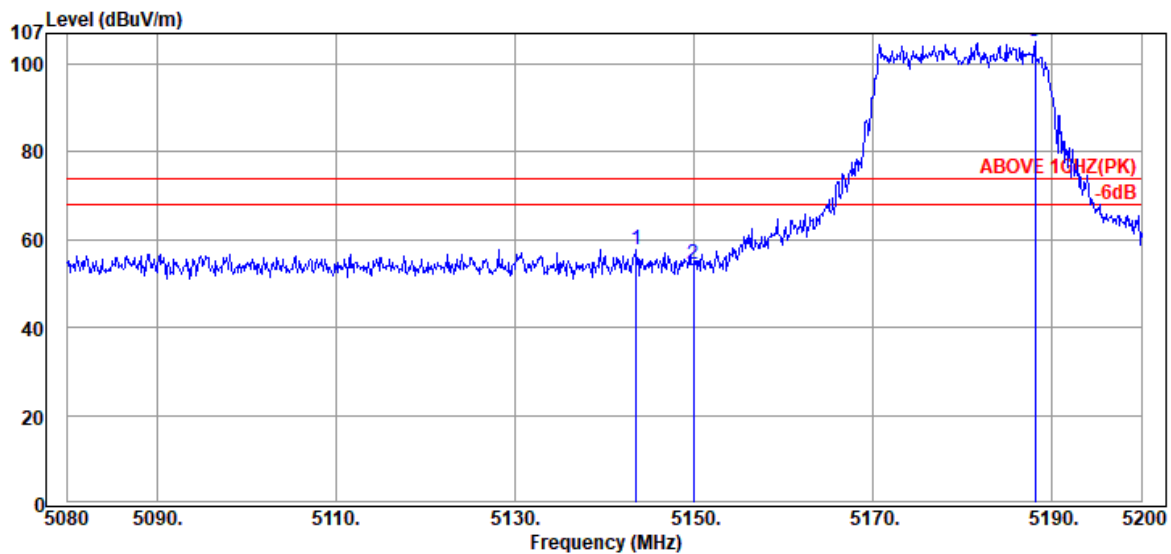

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.60	33.89	8.72	15.20	57.81	74.00	16.19	Peak
5149.96	33.90	8.73	11.93	54.56	74.00	19.44	Peak
@ 5188.12	34.05	8.75	62.43	105.23	---	---	Peak

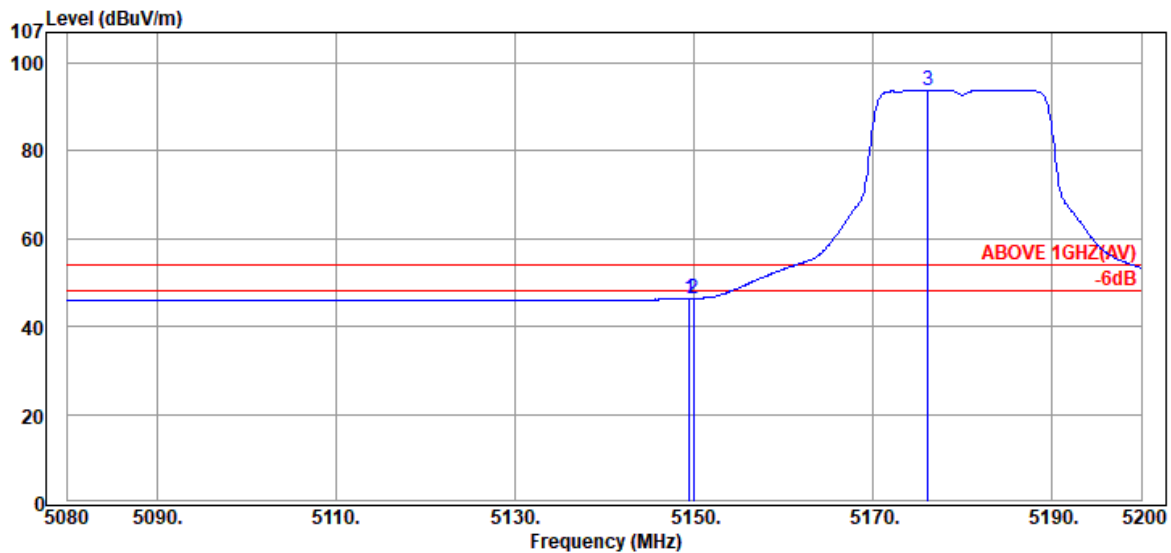

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.48	33.90	8.73	3.74	46.37	54.00	7.63	Average
5149.96	33.90	8.73	3.77	46.40	54.00	7.60	Average
@ 5176.12	34.00	8.74	50.99	93.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
		Frequency	TX 5320MHz

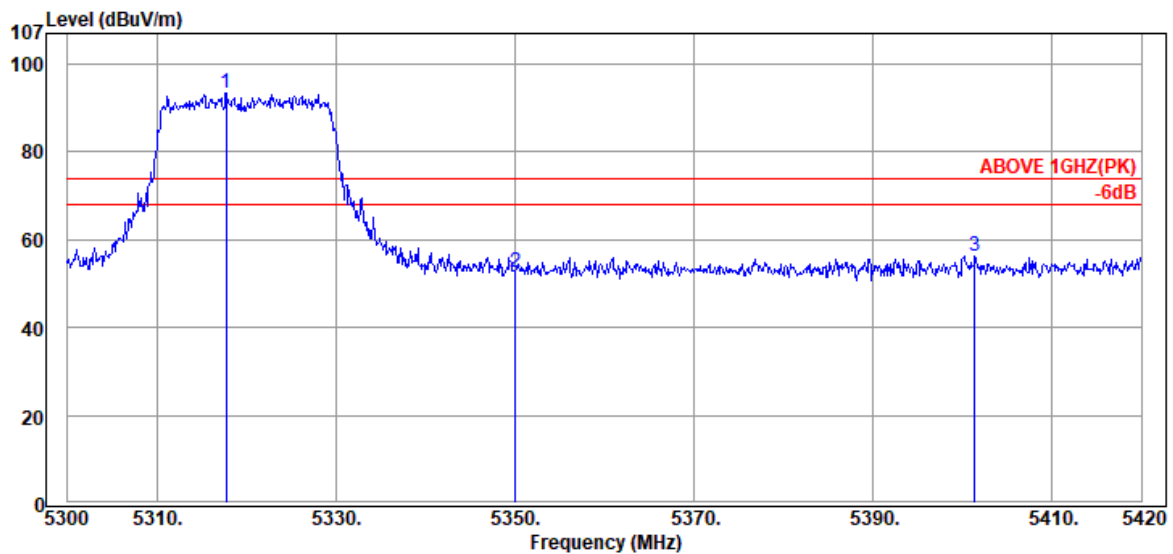

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.76	34.50	8.82	50.06	93.38	---	---	Peak
5350.04	34.50	8.84	9.09	52.43	74.00	21.57	Peak
5401.40	34.50	8.87	12.91	56.28	74.00	17.72	Peak

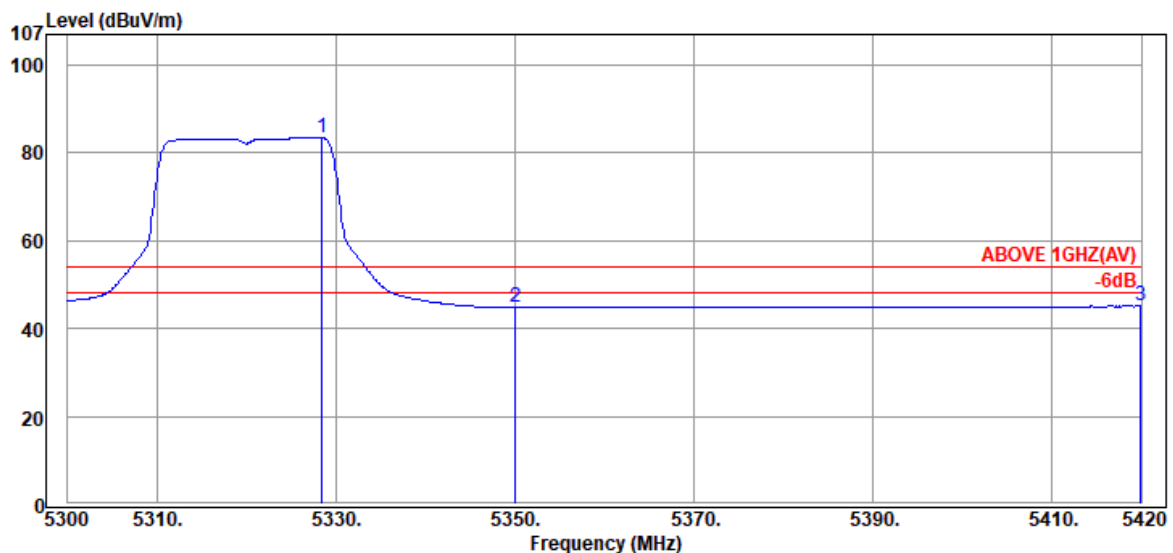

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.44	34.50	8.83	40.24	83.57	---	---	Average
5350.04	34.50	8.84	1.42	44.76	54.00	9.24	Average
5419.88	34.50	8.88	1.72	45.10	54.00	8.90	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
		Frequency	TX 5320MHz

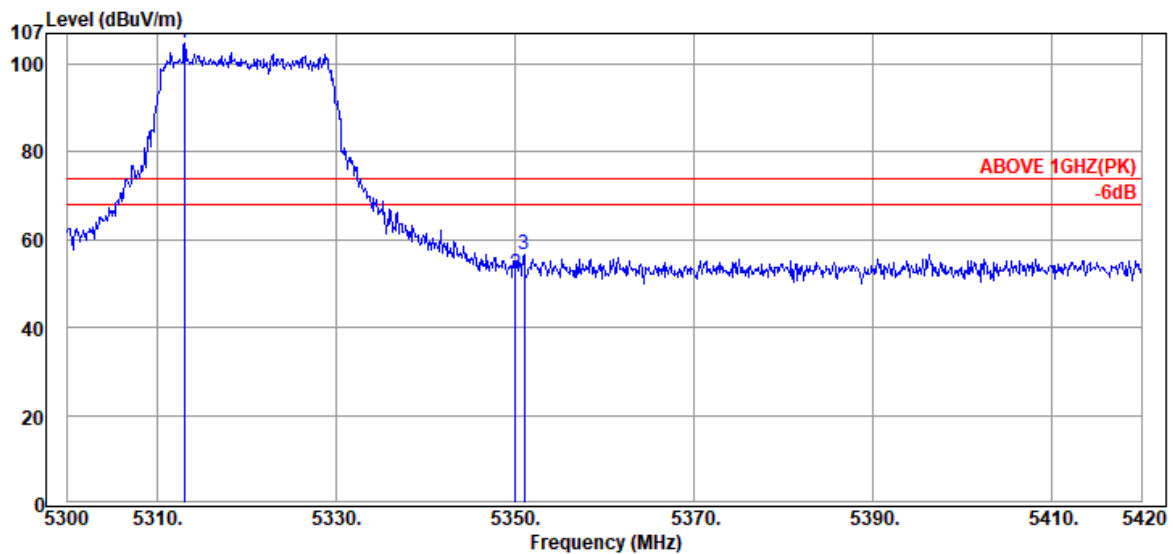

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.08	34.50	8.82	61.47	104.79	---	---	Peak
5350.04	34.50	8.84	8.70	52.04	74.00	21.96	Peak
5351.00	34.50	8.84	13.32	56.66	74.00	17.34	Peak

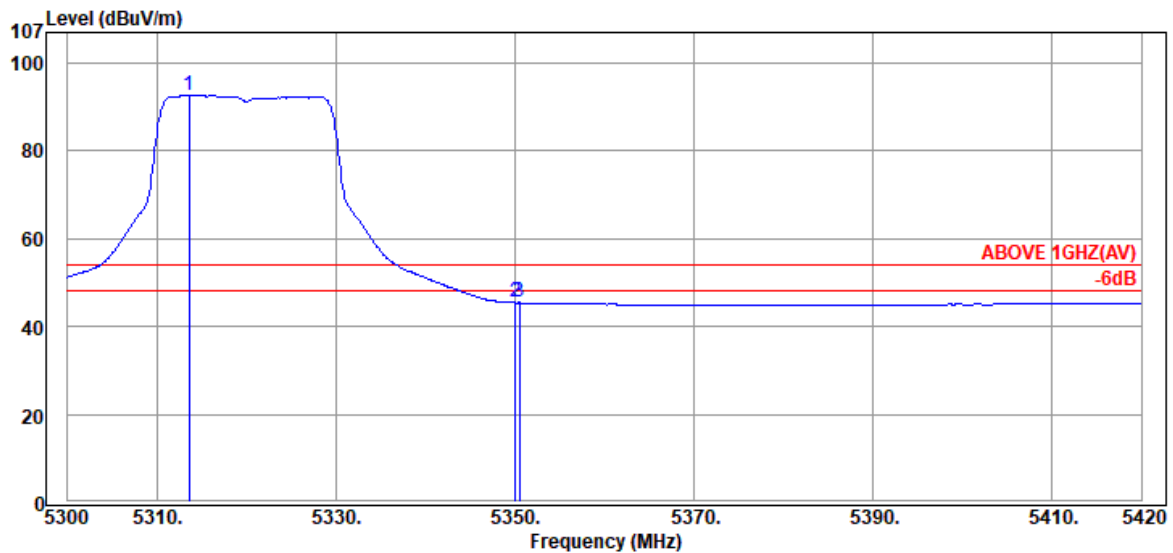

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.56	34.50	8.82	49.25	92.57	---	---	Average
5350.04	34.50	8.84	2.07	45.41	54.00	8.59	Average
5350.52	34.50	8.84	2.09	45.43	54.00	8.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5500MHz

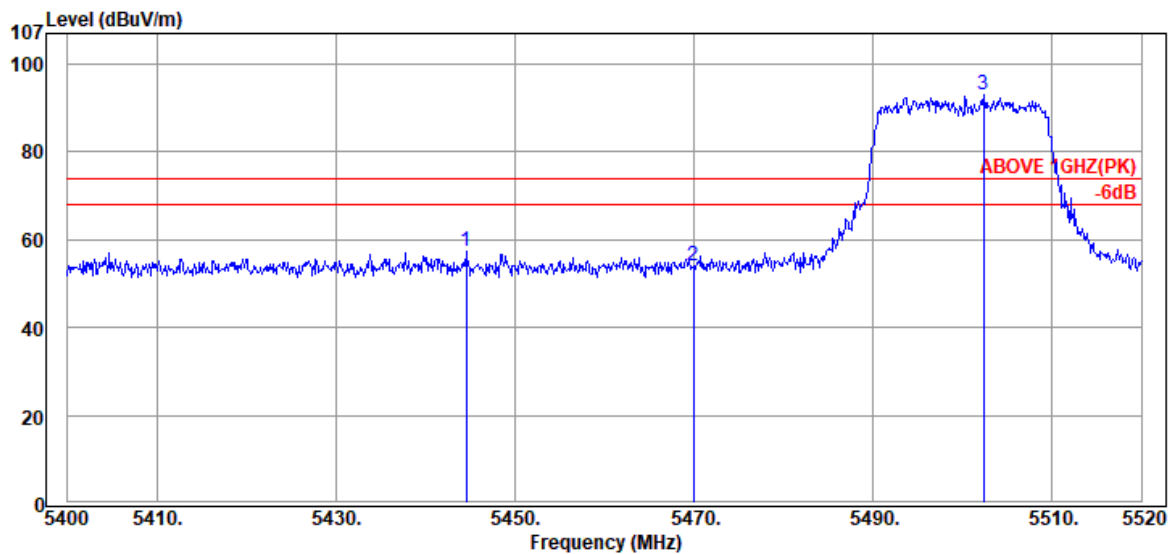

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.52	34.50	8.89	13.83	57.22	74.00	16.78	Peak
5469.96	34.50	8.91	10.55	53.96	74.00	20.04	Peak
@ 5502.36	34.50	8.92	49.44	92.86	---	---	Peak

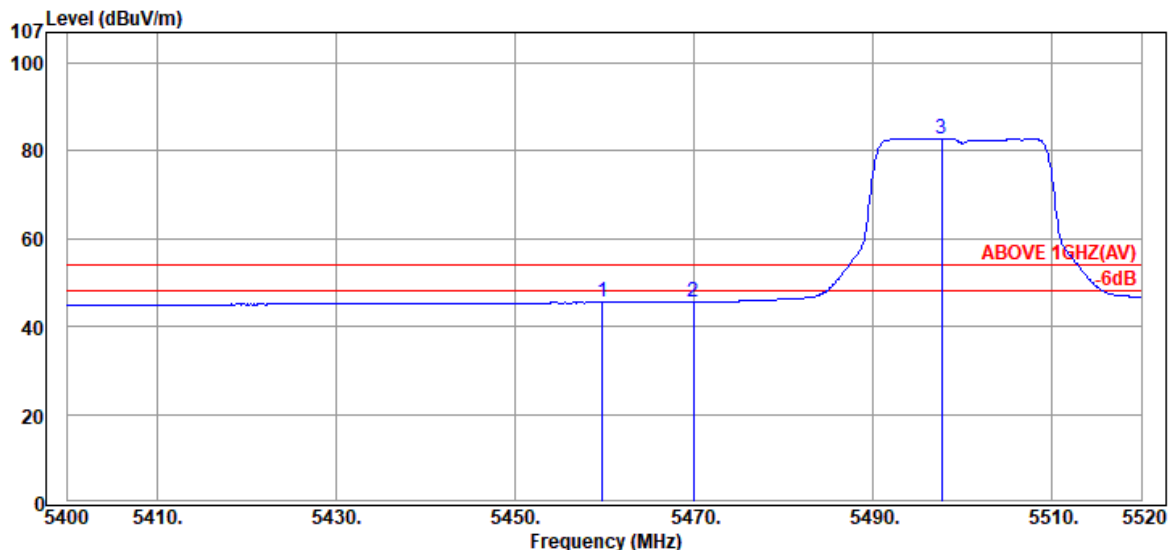

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.76	34.50	8.90	2.07	45.47	54.00	8.53	Average
5469.96	34.50	8.91	2.18	45.59	54.00	8.41	Average
@ 5497.68	34.50	8.92	39.44	82.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5500MHz

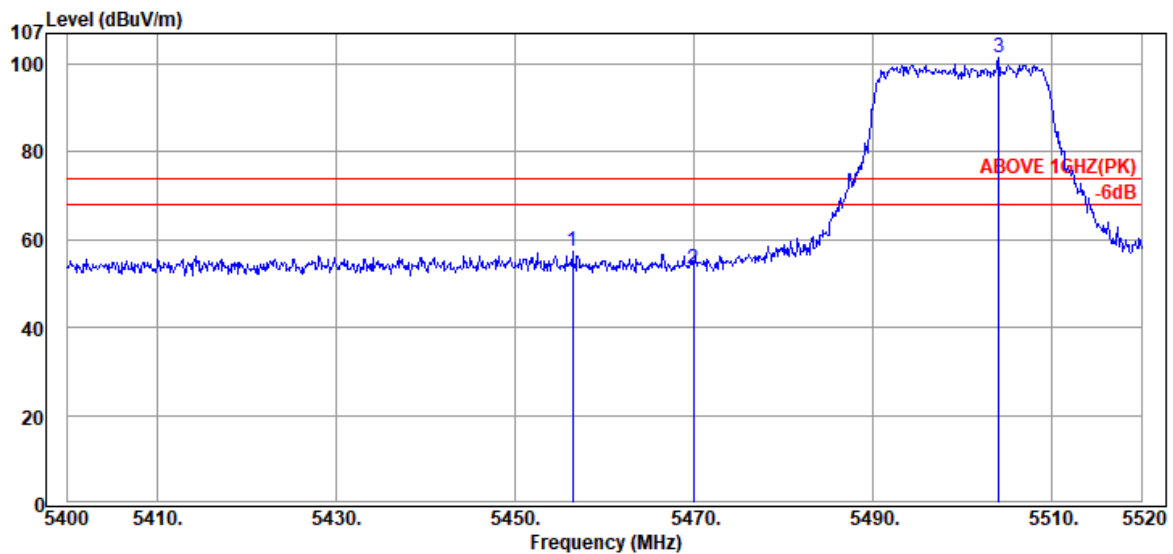

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.40	34.50	8.90	13.93	57.33	74.00	16.67	Peak
5469.96	34.50	8.91	9.73	53.14	74.00	20.86	Peak
@ 5504.04	34.51	8.92	57.91	101.34	---	---	Peak

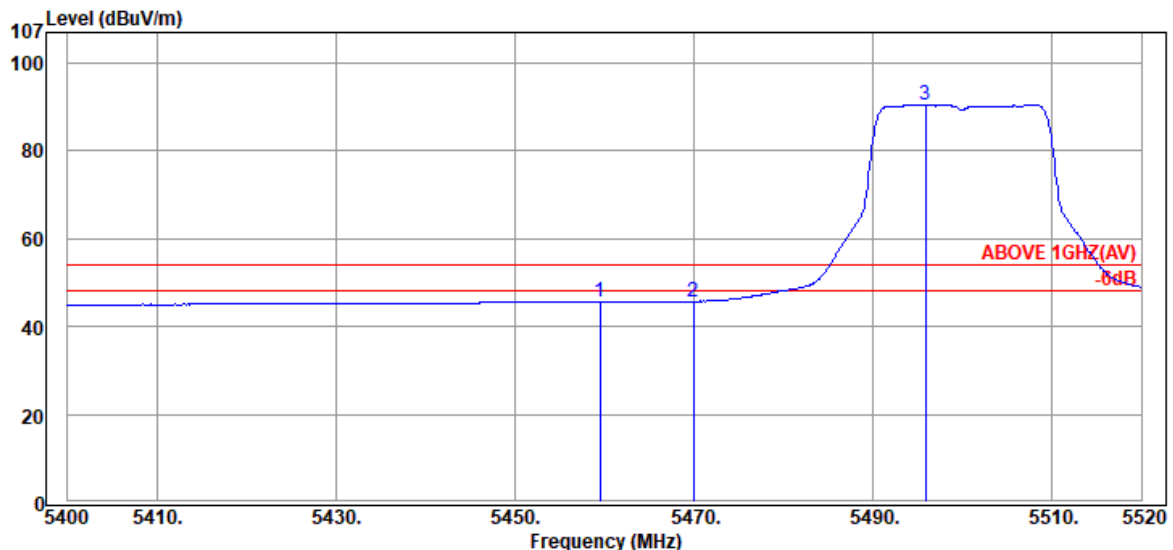

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.52	34.50	8.90	2.19	45.59	54.00	8.41	Average
5469.96	34.50	8.91	2.32	45.73	54.00	8.27	Average
@ 5495.88	34.50	8.92	47.03	90.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5700MHz

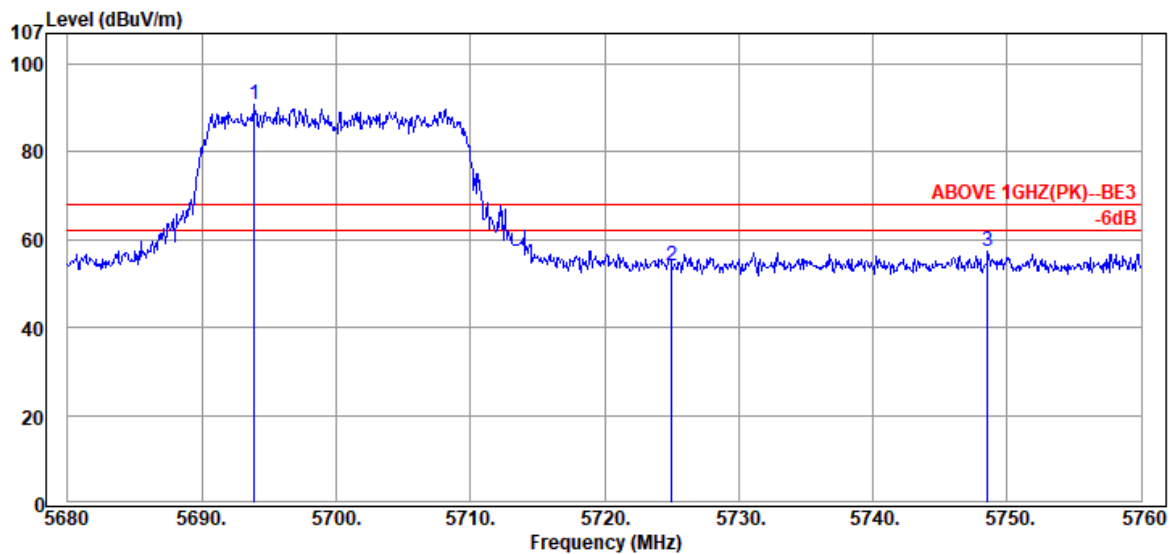

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5693.92	34.42	9.02	47.21	90.65	---	---	Peak
	5725.04	34.40	9.04	10.66	54.10	68.20	14.10	Peak
	5748.56	34.40	9.05	14.07	57.52	68.20	10.68	Peak

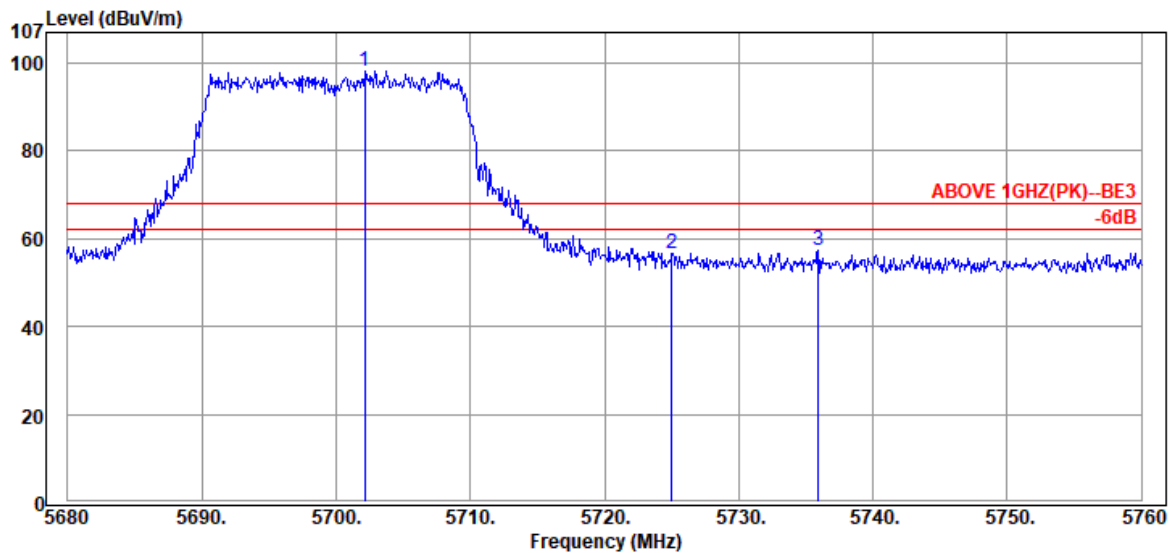

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.16	34.40	9.03	54.82	98.25	---	---	Peak
	5725.04	34.40	9.04	13.34	56.78	68.20	11.42	Peak
	5735.92	34.40	9.05	14.04	57.49	68.20	10.71	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5720MHz

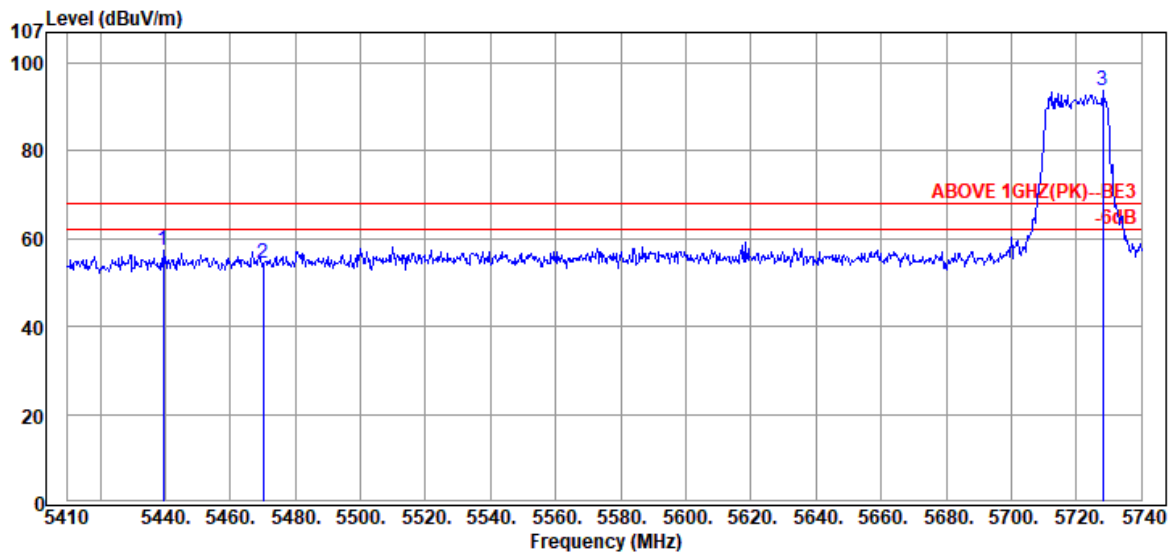

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.37	34.50	8.89	13.81	57.20	68.20	11.00	Peak
5470.06	34.50	8.91	11.10	54.51	68.20	13.69	Peak
@ 5728.12	34.40	9.04	50.48	93.92	---	---	Peak

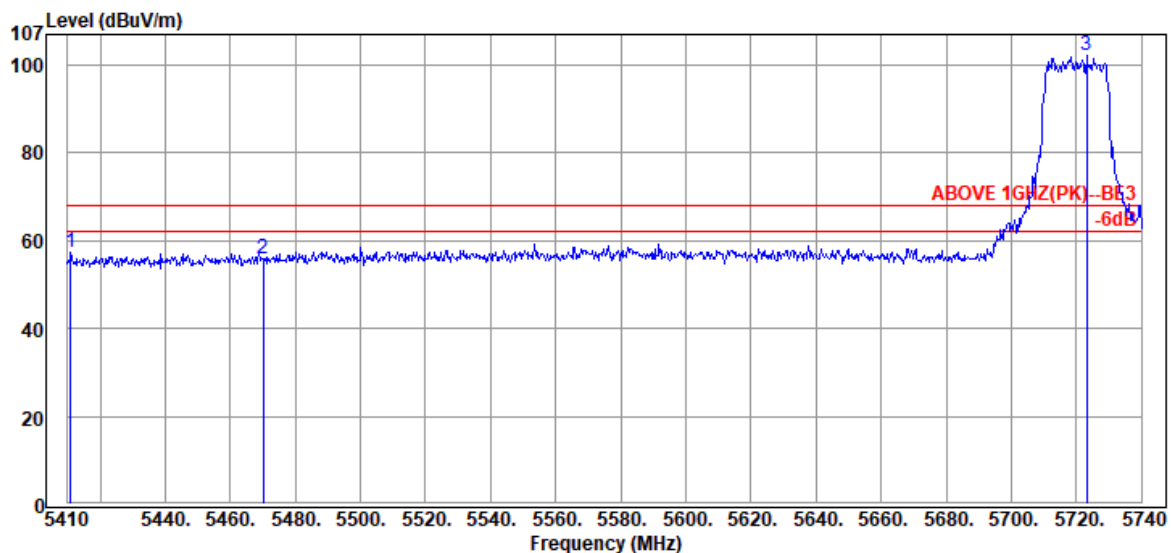

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.99	34.50	8.87	13.90	57.27	68.20	10.93	Peak
5470.06	34.50	8.91	12.65	56.06	68.20	12.14	Peak
@ 5723.17	34.40	9.04	58.83	102.27	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5720MHz

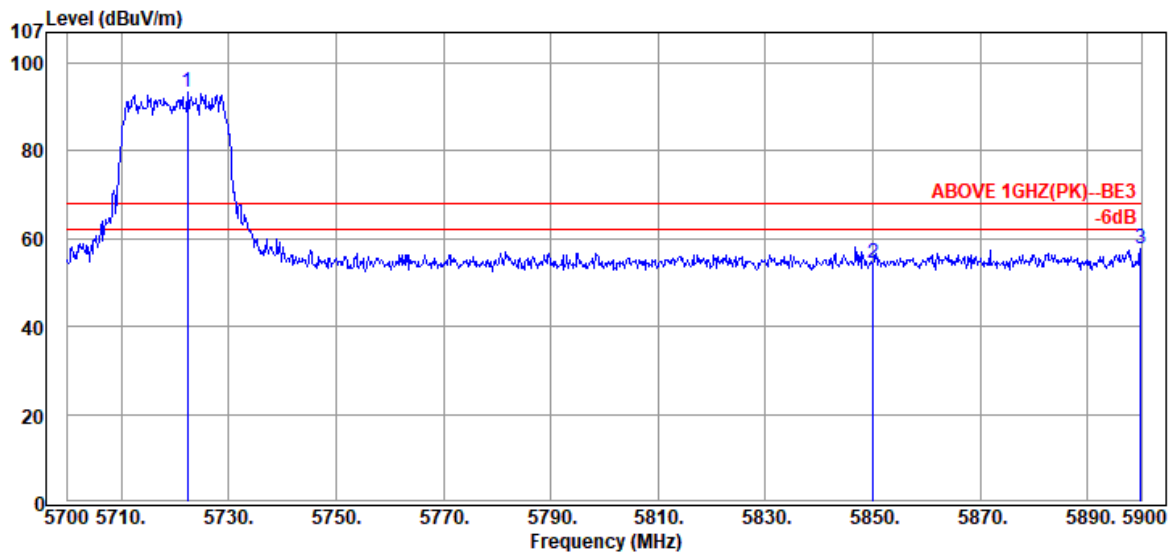

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.40	34.40	9.04	49.92	93.36	---	---	Peak
	5850.00	34.40	9.11	10.96	54.47	68.20	13.73	Peak
	5899.80	34.50	9.13	14.25	57.88	68.20	10.32	Peak

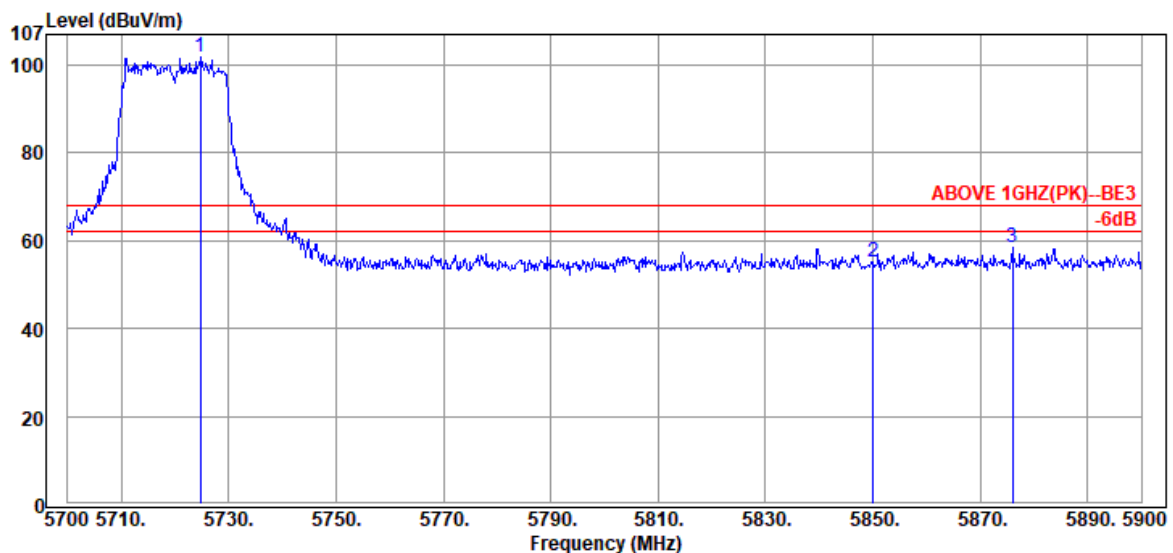

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5724.80	34.40	9.04	58.39	101.83	---	---	Peak
	5850.00	34.40	9.11	11.67	55.18	68.20	13.02	Peak
	5876.00	34.45	9.12	14.85	58.42	68.20	9.78	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
		Frequency	TX 5190MHz

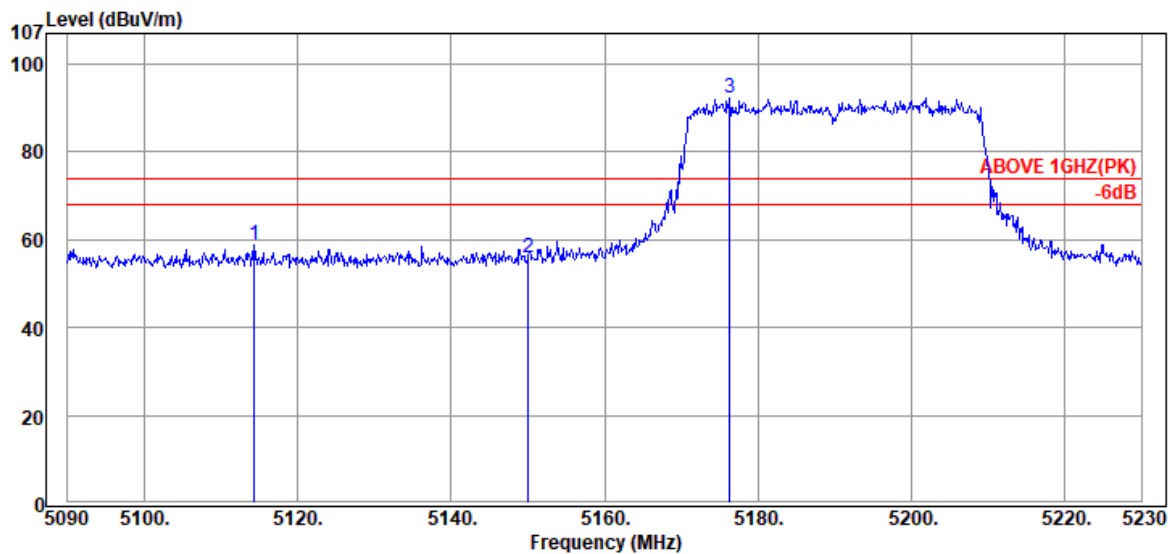

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.36	33.83	8.71	16.21	58.75	74.00	15.25	Peak
5150.06	33.90	8.73	13.08	55.71	74.00	18.29	Peak
@ 5176.38	34.01	8.74	49.67	92.42	---	---	Peak

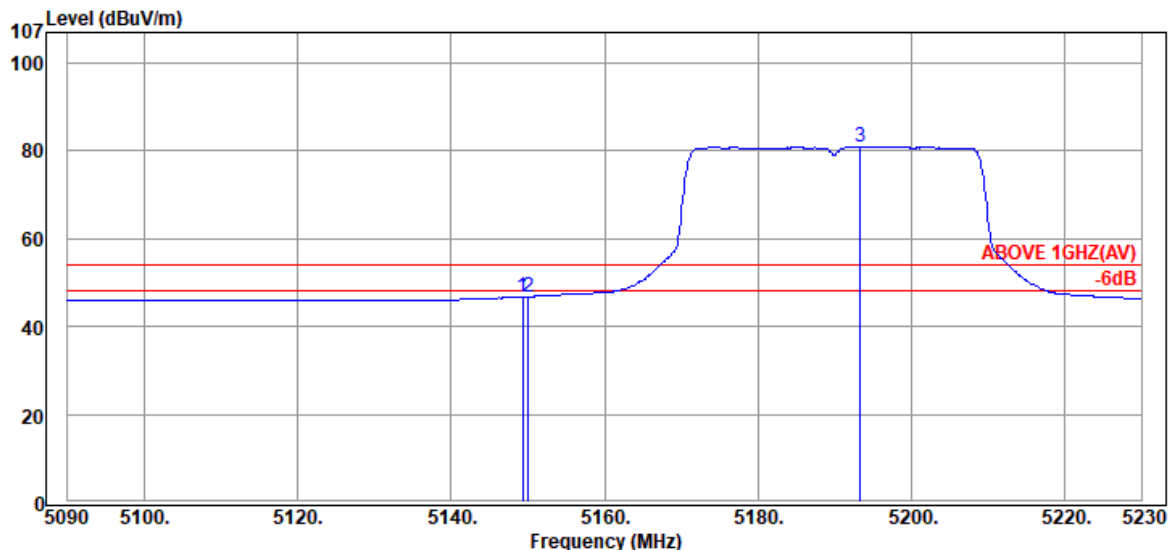

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.36	33.90	8.73	4.15	46.78	54.00	7.22	Average
5150.06	33.90	8.73	4.17	46.80	54.00	7.20	Average
@ 5193.32	34.07	8.75	38.16	80.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
		Frequency	TX 5190MHz

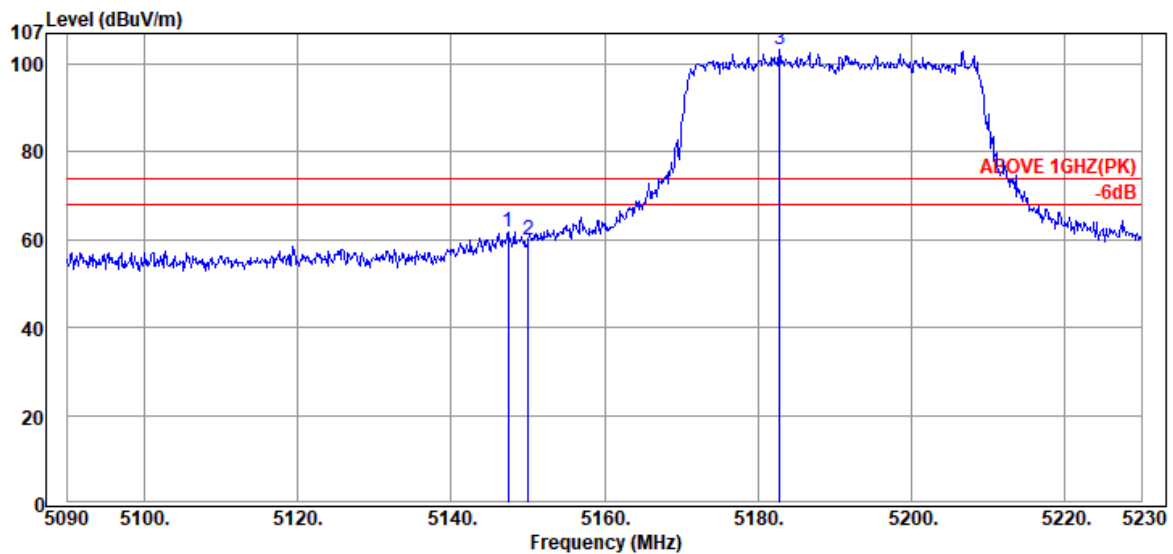

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.40	33.89	8.73	19.09	61.71	74.00	12.29	Peak
5150.06	33.90	8.73	17.39	60.02	74.00	13.98	Peak
@ 5182.82	34.03	8.75	60.45	103.23	---	---	Peak

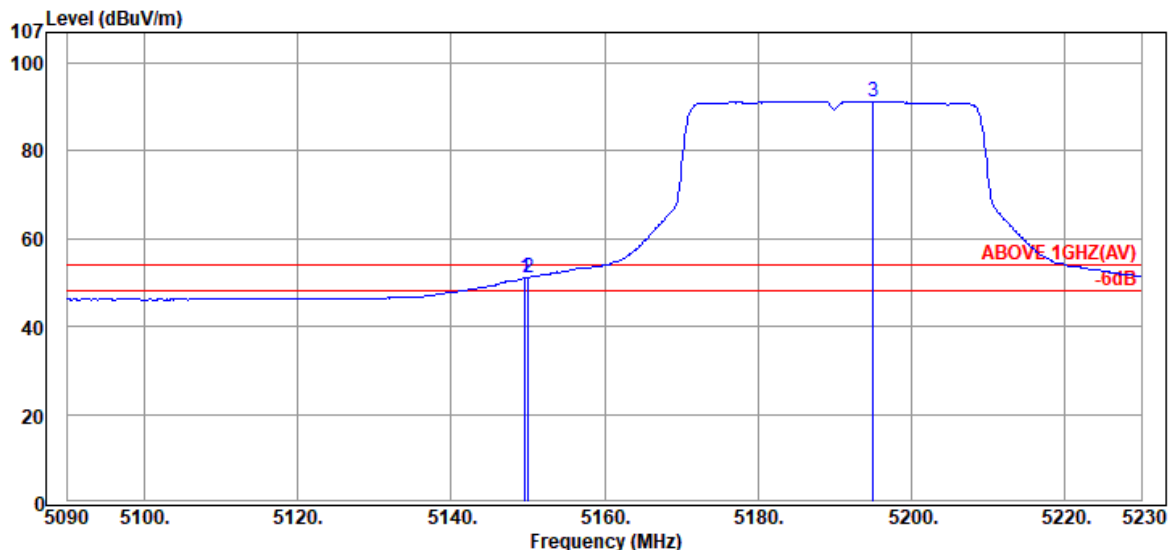

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.64	33.90	8.73	8.41	51.04	54.00	2.96	Average
5150.06	33.90	8.73	8.50	51.13	54.00	2.87	Average
@ 5195.00	34.08	8.75	48.50	91.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
		Frequency	TX 5310MHz

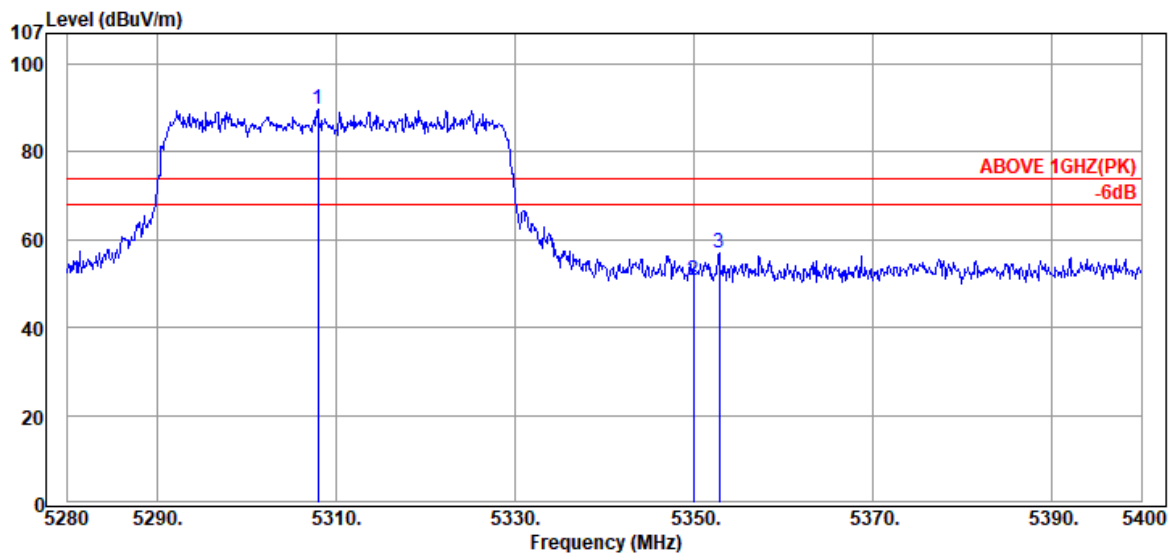

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.96	34.50	8.82	46.55	89.87	---	---	Peak
5349.96	34.50	8.84	7.22	50.56	74.00	23.44	Peak
5352.84	34.50	8.84	13.81	57.15	74.00	16.85	Peak

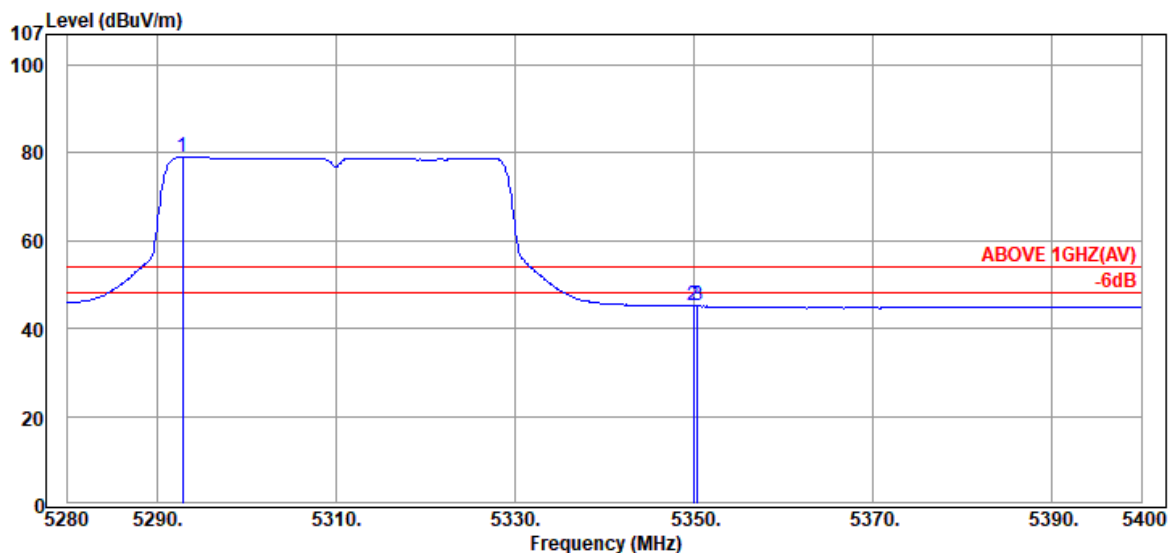

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.84	34.49	8.81	35.81	79.11	---	---	Average
5349.96	34.50	8.84	1.70	45.04	54.00	8.96	Average
5350.44	34.50	8.84	1.76	45.10	54.00	8.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
		Frequency	TX 5310MHz

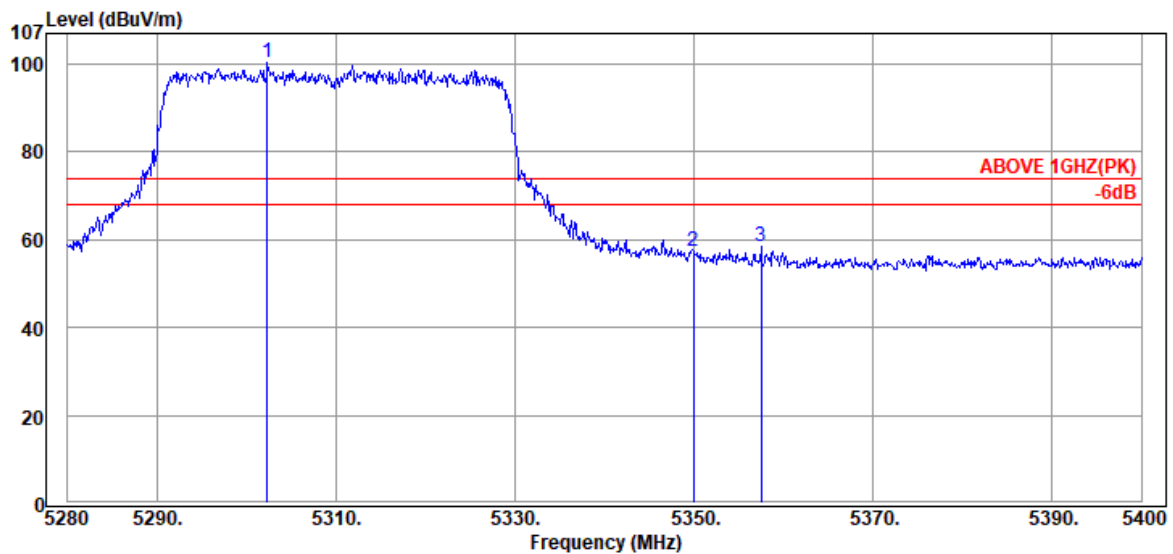

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.32	34.50	8.81	56.90	100.21	---	---	Peak
5349.96	34.50	8.84	14.18	57.52	74.00	16.48	Peak
5357.52	34.50	8.84	15.01	58.35	74.00	15.65	Peak

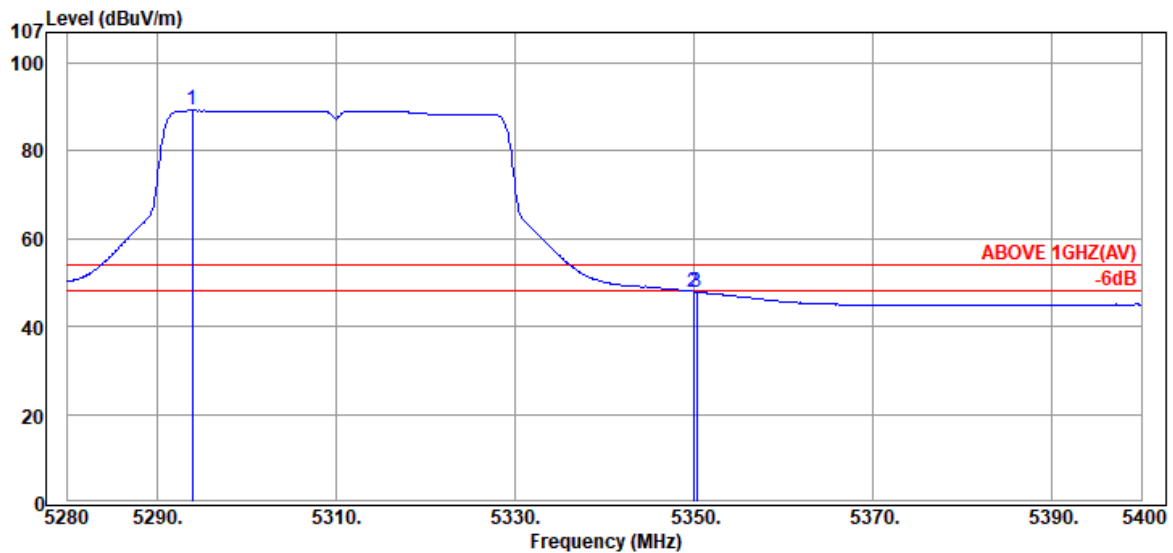

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.92	34.49	8.81	45.90	89.20	---	---	Average
5349.96	34.50	8.84	4.60	47.94	54.00	6.06	Average
5350.32	34.50	8.84	4.51	47.85	54.00	6.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5510MHz

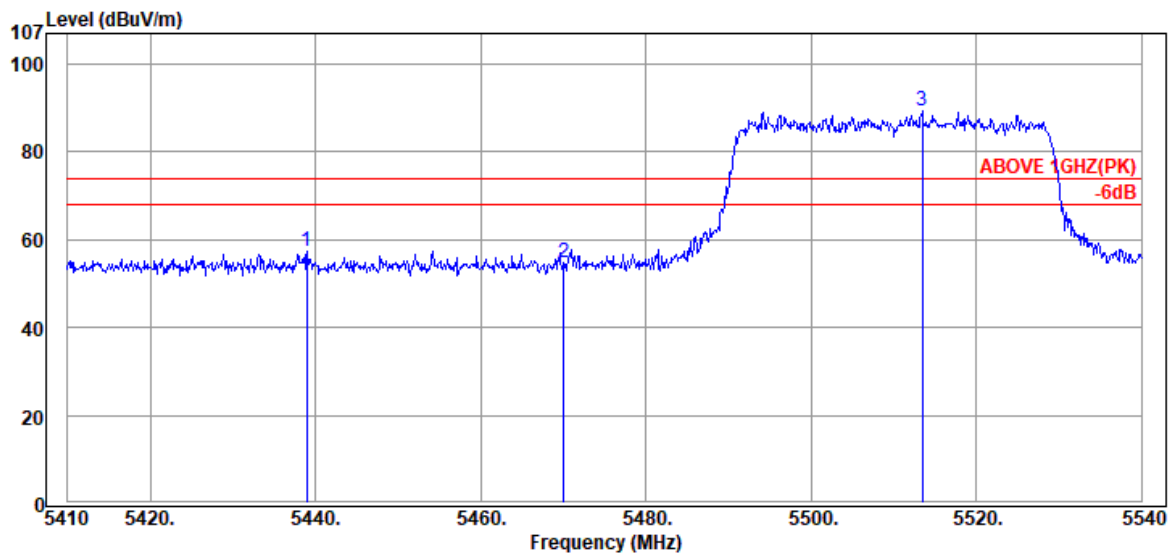

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.99	34.50	8.89	13.90	57.29	74.00	16.71	Peak
5470.06	34.50	8.91	11.48	54.89	74.00	19.11	Peak
@ 5513.48	34.53	8.93	45.91	89.37	---	---	Peak

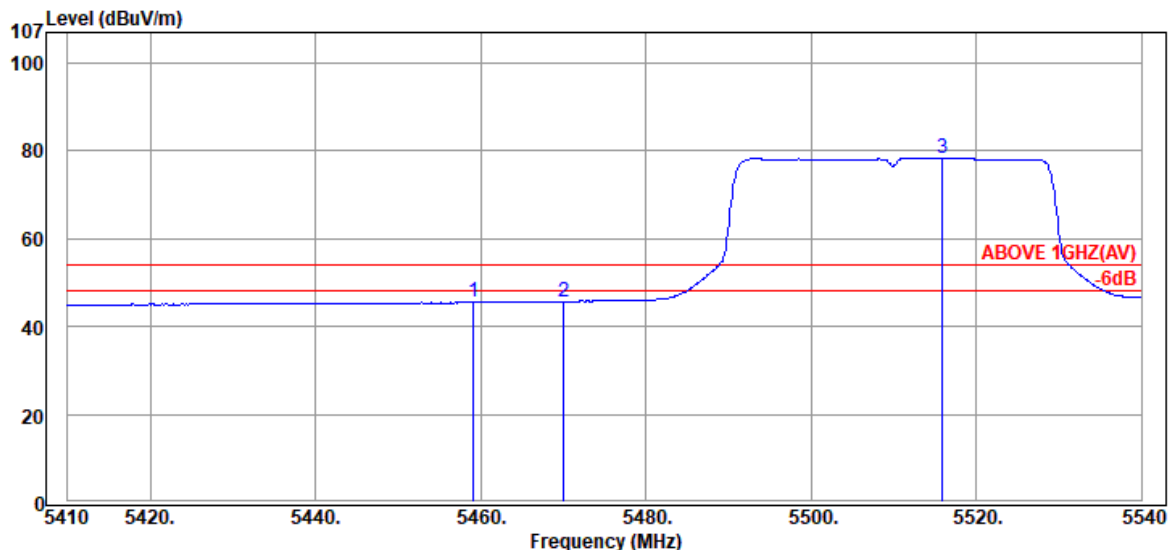

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.14	34.50	8.90	2.11	45.51	54.00	8.49	Average
5470.06	34.50	8.91	2.32	45.73	54.00	8.27	Average
@ 5515.95	34.53	8.93	35.04	78.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5510MHz

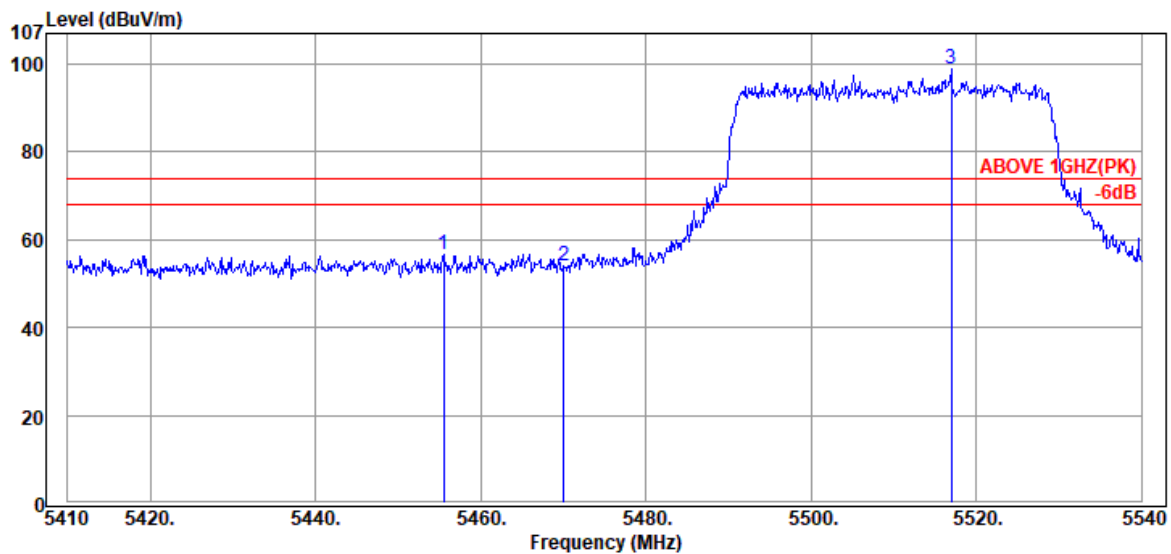

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.50	34.50	8.90	13.10	56.50	74.00	17.50	Peak
5470.06	34.50	8.91	10.59	54.00	74.00	20.00	Peak
@ 5516.99	34.53	8.93	55.33	98.79	---	---	Peak

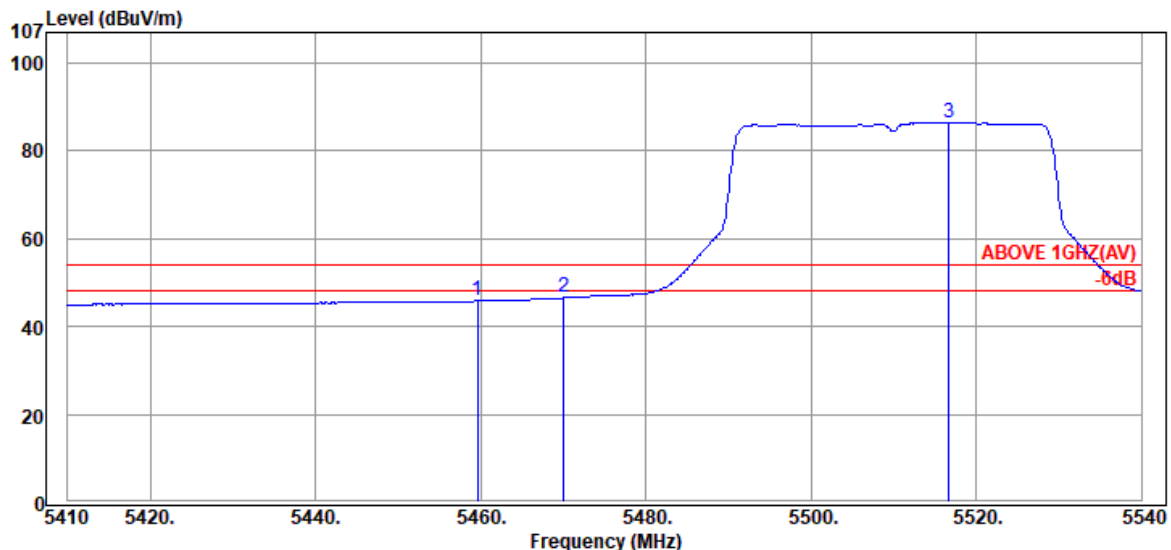

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.66	34.50	8.90	2.40	45.80	54.00	8.20	Average
5470.06	34.50	8.91	3.14	46.55	54.00	7.45	Average
@ 5516.73	34.53	8.93	43.10	86.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5670MHz

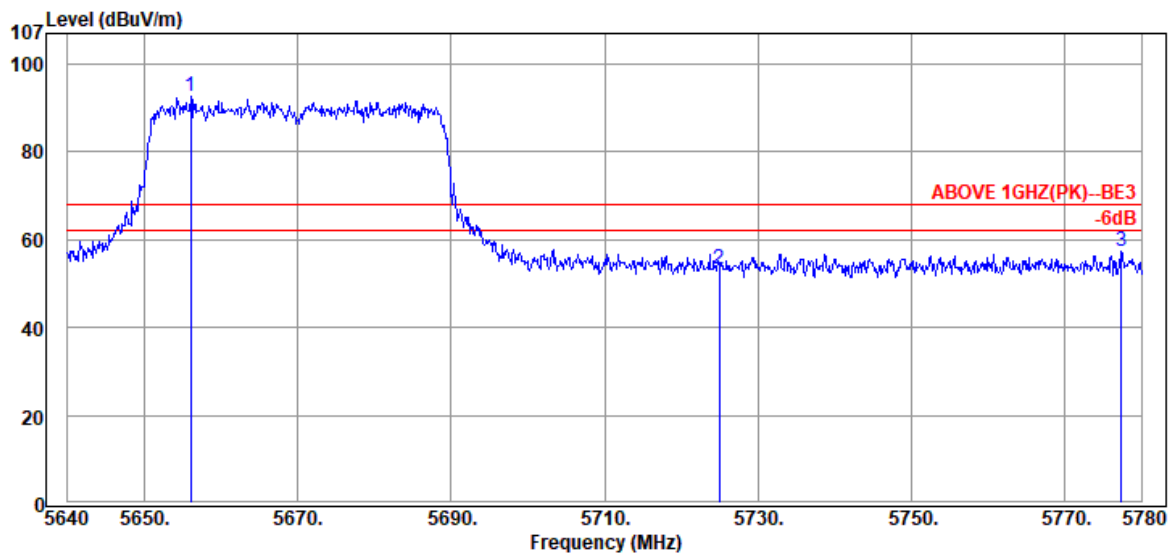

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5656.10	34.58	9.01	48.93	92.52	---	---	Peak
	5724.98	34.40	9.04	9.71	53.15	68.20	15.05	Peak
	5777.34	34.29	9.07	13.84	57.20	68.20	11.00	Peak

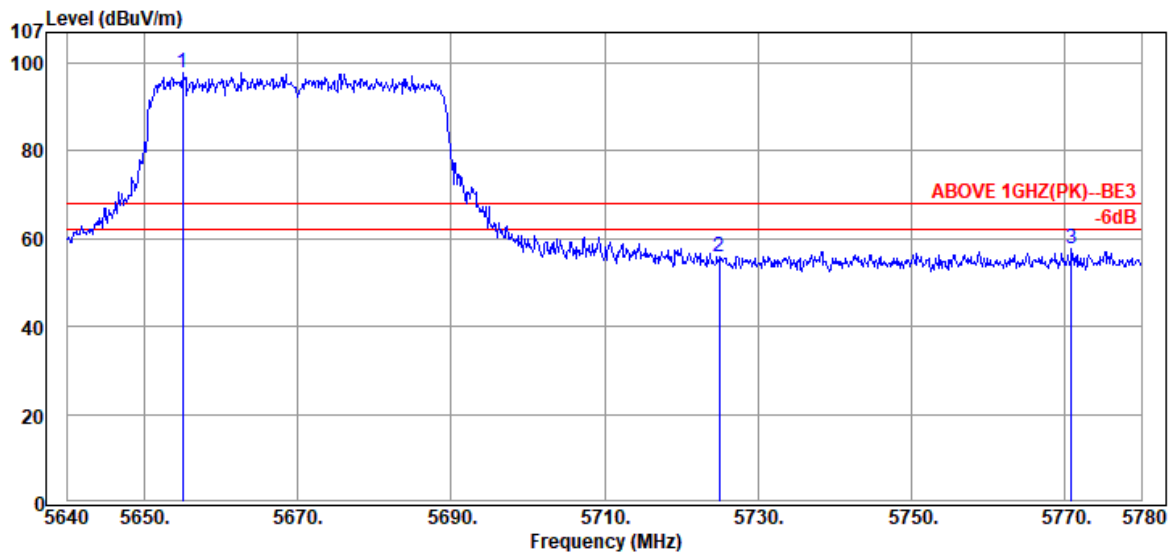

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5654.98	34.58	9.00	54.22	97.80	---	---	Peak
	5724.98	34.40	9.04	12.56	56.00	68.20	12.20	Peak
	5770.90	34.32	9.06	14.45	57.83	68.20	10.37	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5710MHz

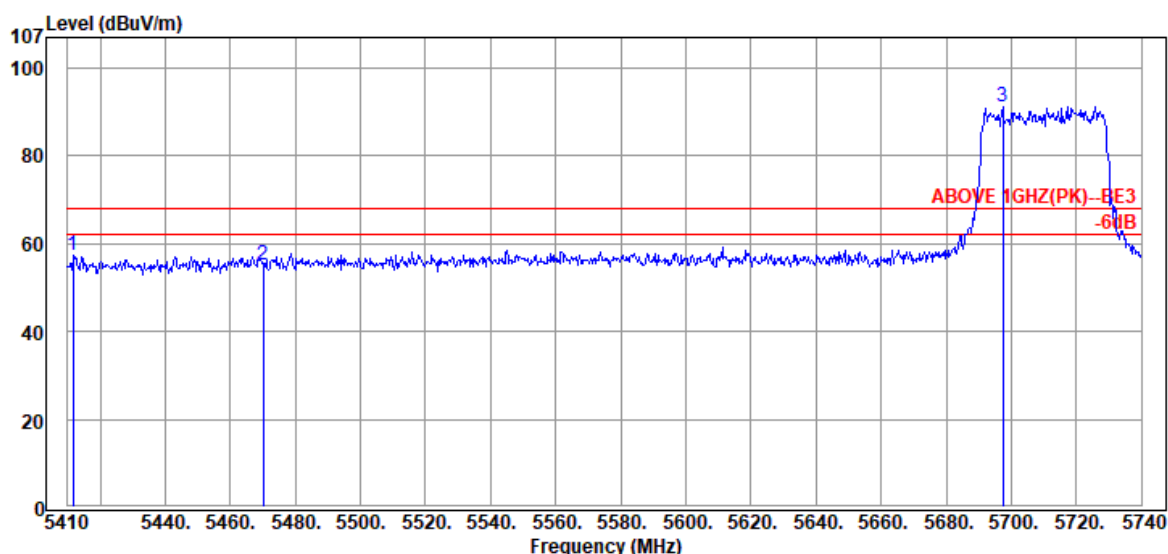

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.65	34.50	8.87	13.86	57.23	68.20	10.97	Peak
5470.06	34.50	8.91	11.92	55.33	68.20	12.87	Peak
@ 5697.43	34.41	9.03	47.87	91.31	---	---	Peak

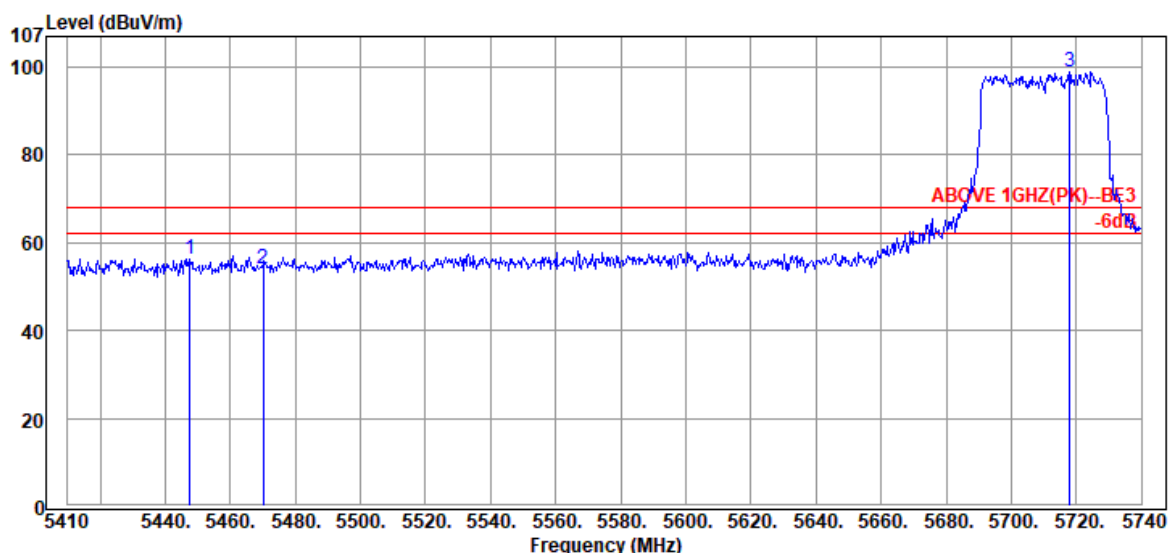

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.62	34.50	8.89	13.03	56.42	68.20	11.78	Peak
5470.06	34.50	8.91	10.61	54.02	68.20	14.18	Peak
@ 5717.89	34.40	9.04	55.47	98.91	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5710MHz

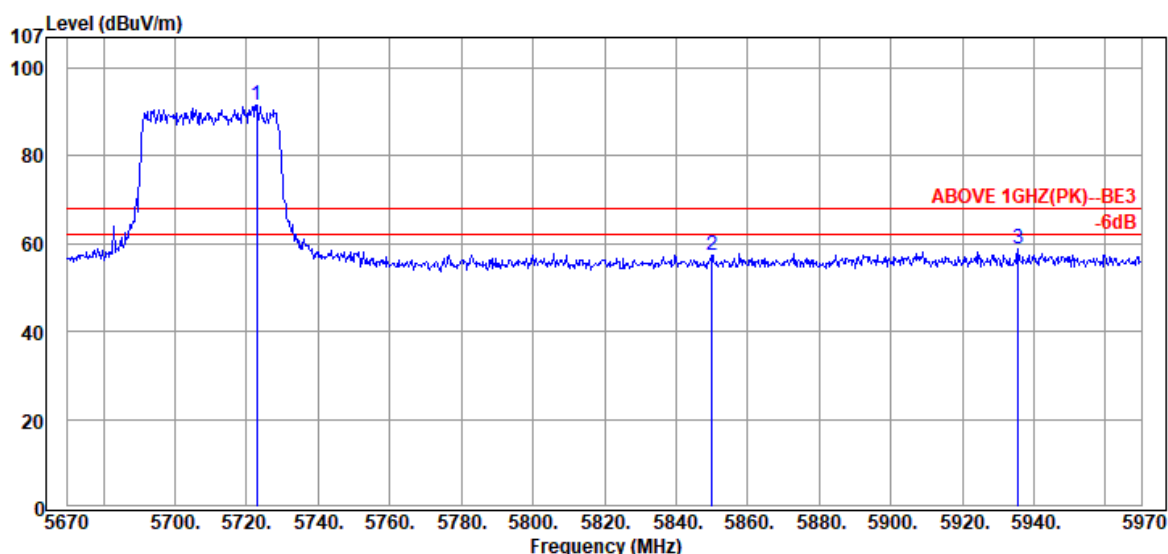

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.80	34.40	9.04	48.24	91.68	---	---	Peak
	5850.00	34.40	9.11	13.98	57.49	68.20	10.71	Peak
	5935.50	34.71	9.15	14.79	58.65	68.20	9.55	Peak

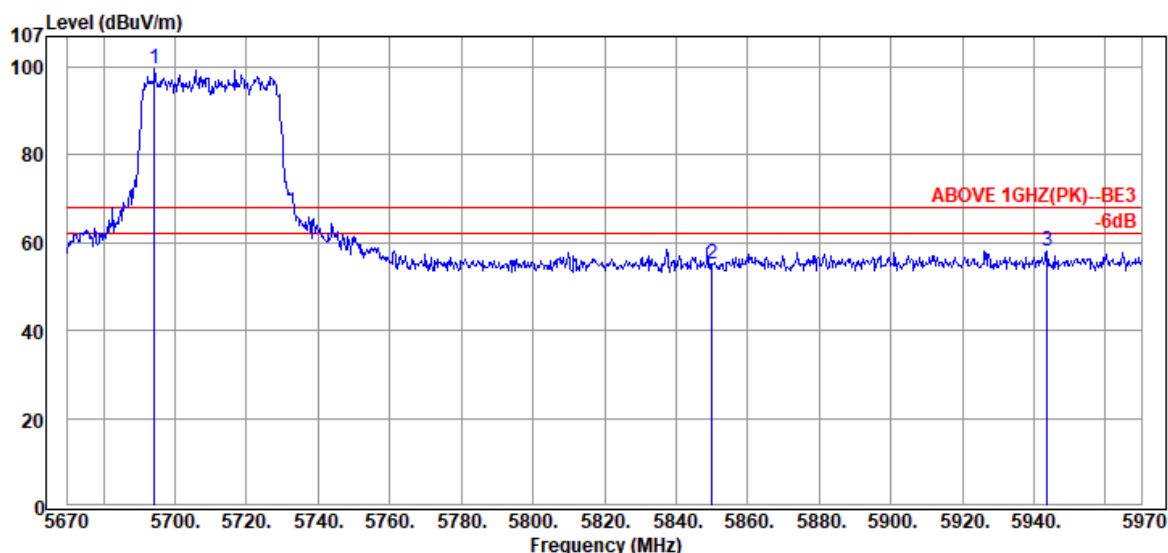

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5694.30	34.42	9.03	56.23	99.68	---	---	Peak
	5850.00	34.40	9.11	11.62	55.13	68.20	13.07	Peak
	5943.60	34.76	9.15	14.26	58.17	68.20	10.03	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
		Frequency	TX 5210MHz

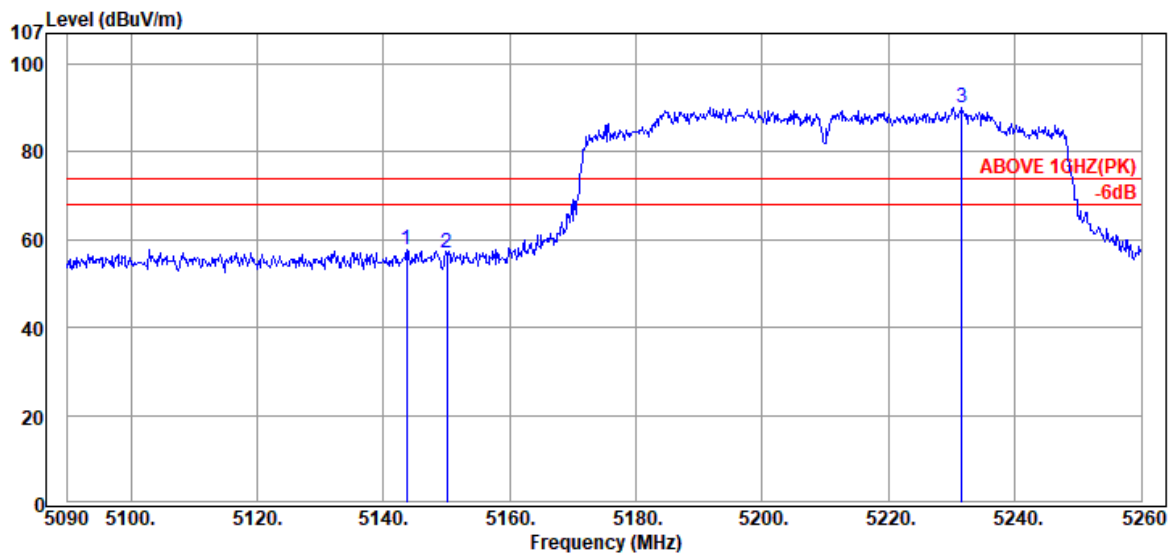

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.72	33.89	8.72	14.99	57.60	74.00	16.40	Peak
5150.01	33.90	8.73	14.23	56.86	74.00	17.14	Peak
@ 5231.61	34.29	8.77	47.07	90.13	---	---	Peak

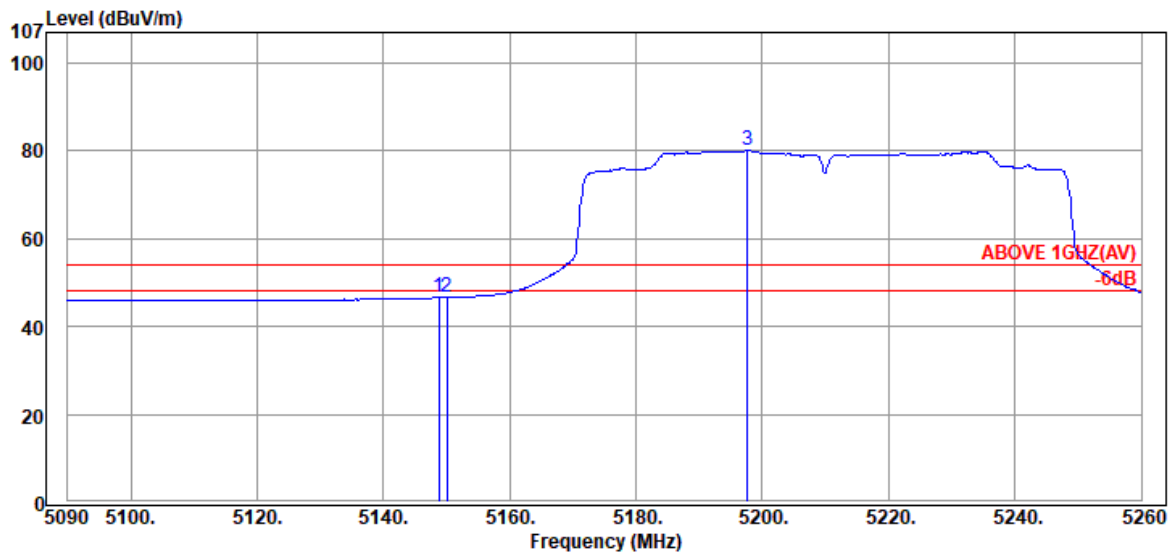

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.82	33.90	8.73	3.96	46.59	54.00	7.41	Average
5150.01	33.90	8.73	3.96	46.59	54.00	7.41	Average
@ 5197.61	34.09	8.75	37.44	80.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
		Frequency	TX 5210MHz

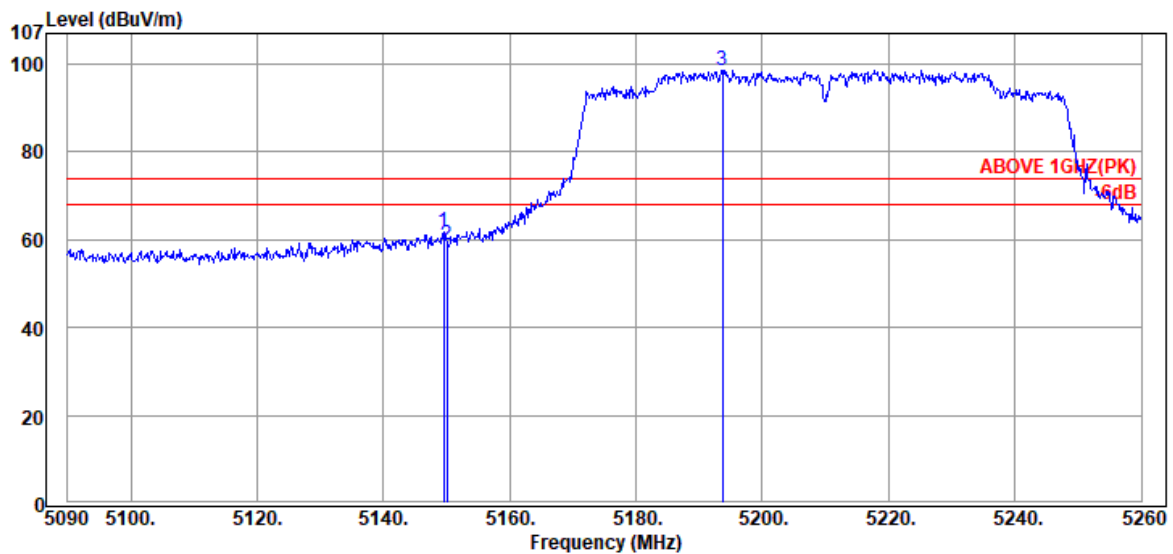

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	33.90	8.73	19.05	61.68	74.00	12.32	Peak
5150.01	33.90	8.73	16.09	58.72	74.00	15.28	Peak
@ 5193.70	34.07	8.75	55.88	98.70	---	---	Peak

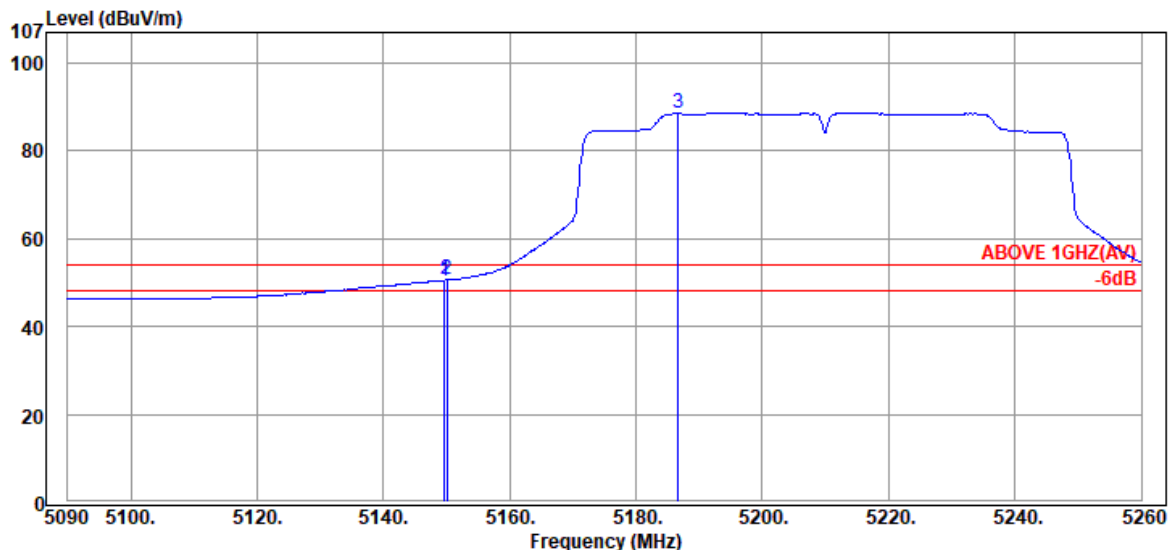

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5293.12	34.49	8.81	45.08	88.38	---	---	Average
5350.08	34.50	8.84	5.49	48.83	54.00	5.17	Average
@ 5350.88	34.50	8.84	5.52	48.86	54.00	5.14	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
		Frequency	TX 5290MHz

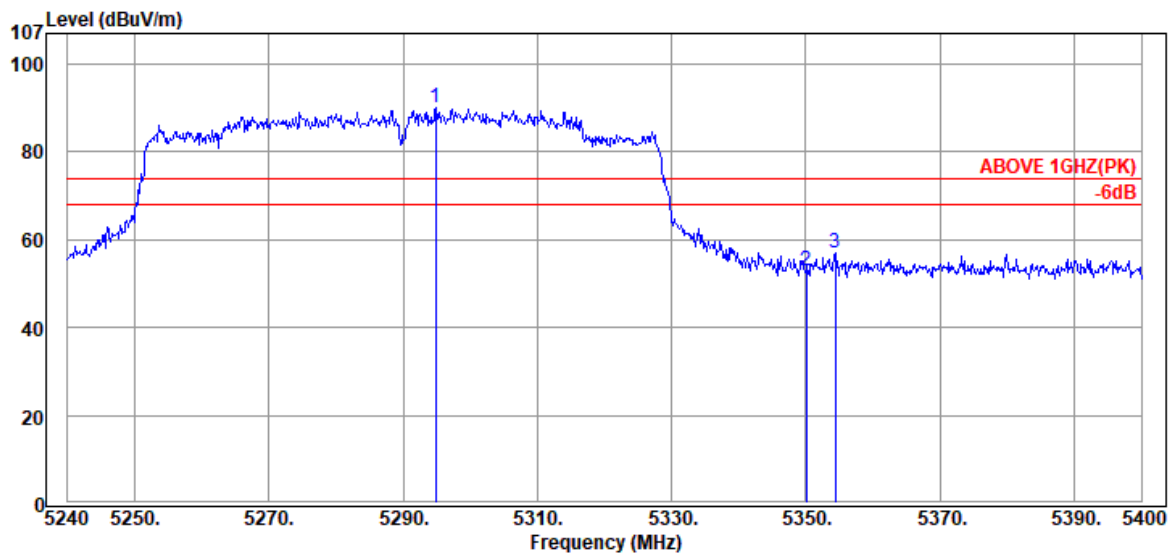

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.88	34.49	8.81	46.90	90.20	---	---	Peak
5350.08	34.50	8.84	9.66	53.00	74.00	21.00	Peak
5354.40	34.50	8.84	13.61	56.95	74.00	17.05	Peak

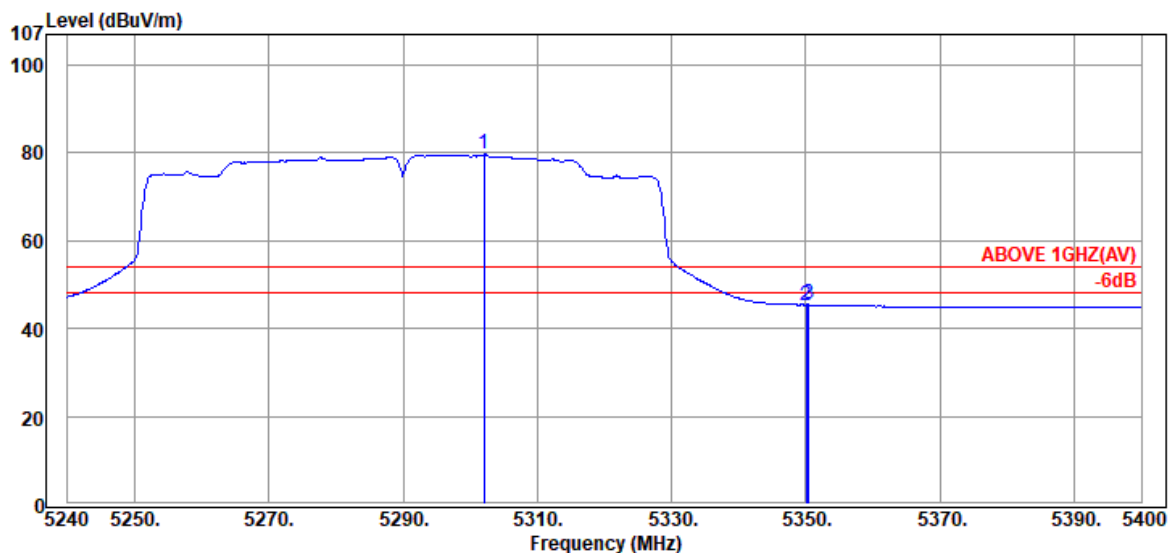

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.08	34.50	8.81	36.47	79.78	---	---	Average
5350.08	34.50	8.84	2.05	45.39	54.00	8.61	Average
5350.40	34.50	8.84	2.08	45.42	54.00	8.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
		Frequency	TX 5290MHz

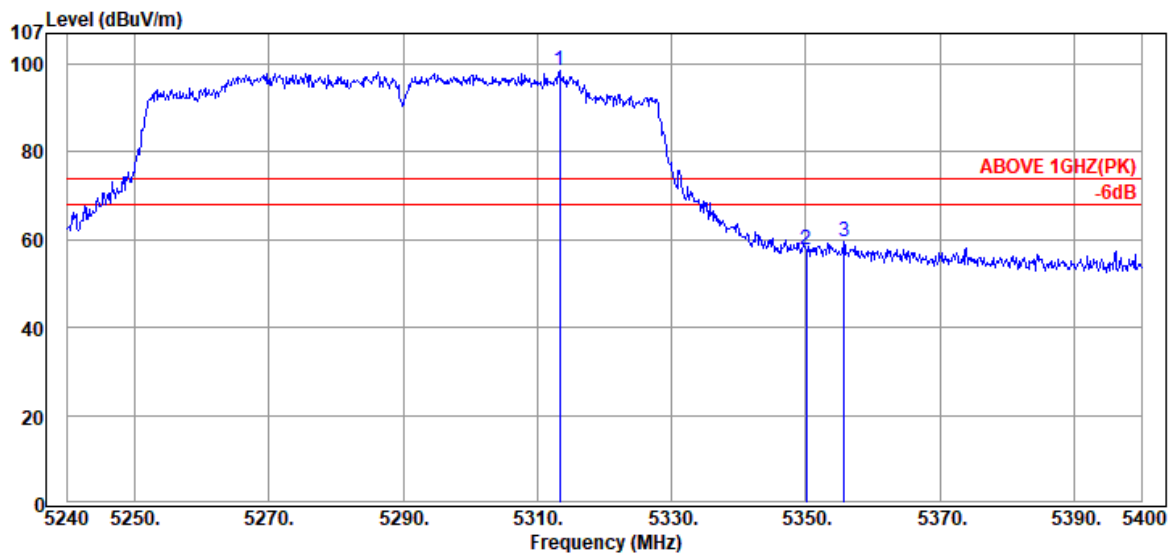

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.28	34.50	8.82	55.08	98.40	---	---	Peak
5350.08	34.50	8.84	14.34	57.68	74.00	16.32	Peak
5355.68	34.50	8.84	16.37	59.71	74.00	14.29	Peak

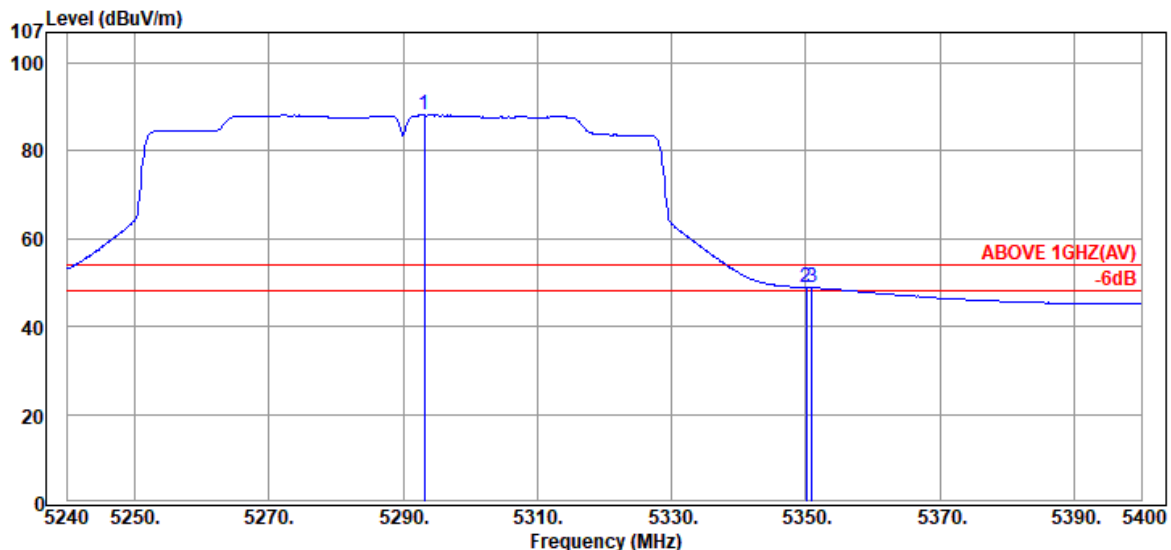

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.12	34.49	8.81	45.08	88.38	---	---	Average
5350.08	34.50	8.84	5.49	48.83	54.00	5.17	Average
5350.88	34.50	8.84	5.52	48.86	54.00	5.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5530MHz

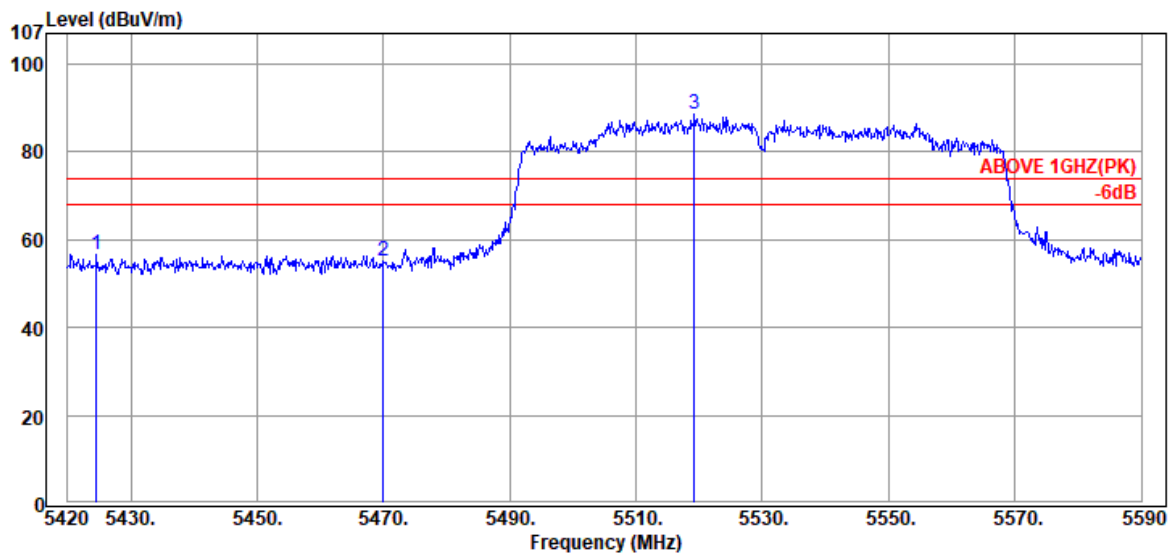

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.59	34.50	8.88	13.09	56.47	74.00	17.53	Peak
5469.98	34.50	8.91	11.90	55.31	74.00	18.69	Peak
@ 5519.28	34.54	8.93	45.15	88.62	---	---	Peak

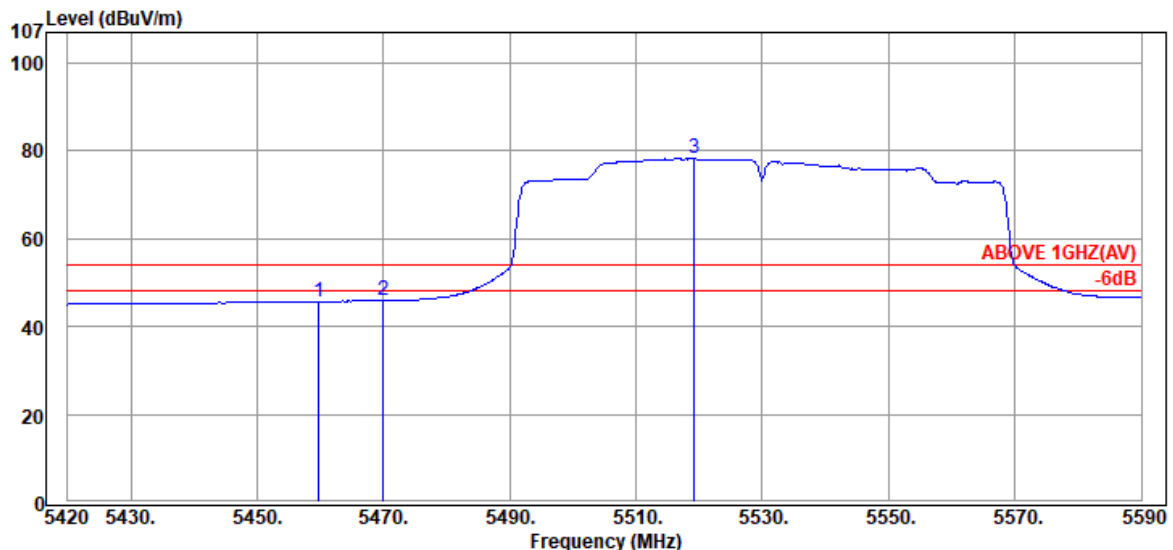

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.78	34.50	8.90	2.31	45.71	54.00	8.29	Average
5469.98	34.50	8.91	2.53	45.94	54.00	8.06	Average
@ 5519.28	34.54	8.93	34.78	78.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5530MHz

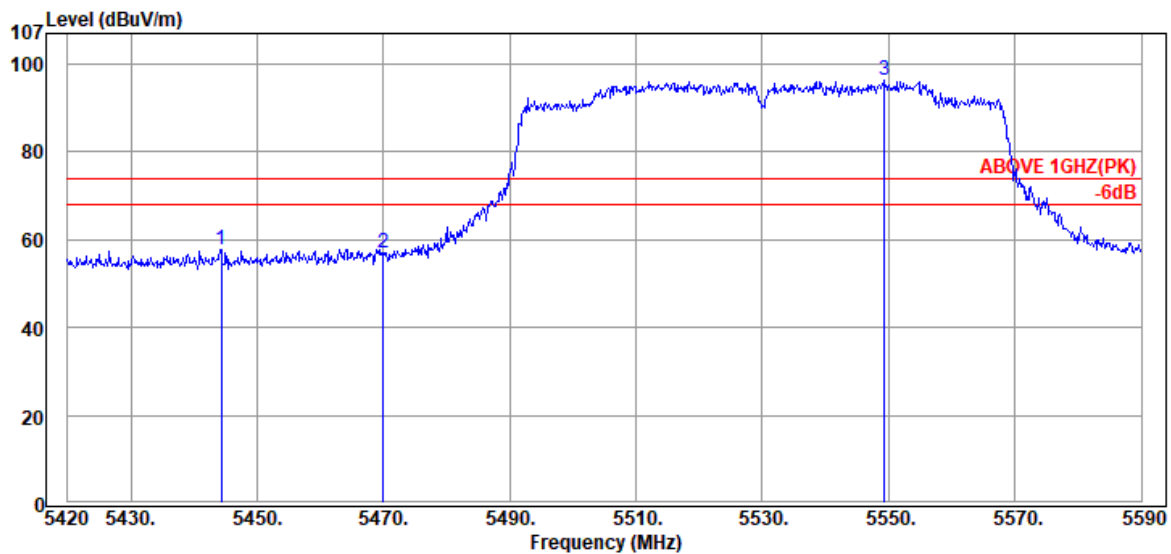

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.31	34.50	8.89	14.47	57.86	74.00	16.14	Peak
5469.98	34.50	8.91	13.72	57.13	74.00	16.87	Peak
@ 5549.37	34.60	8.95	52.87	96.42	---	---	Peak

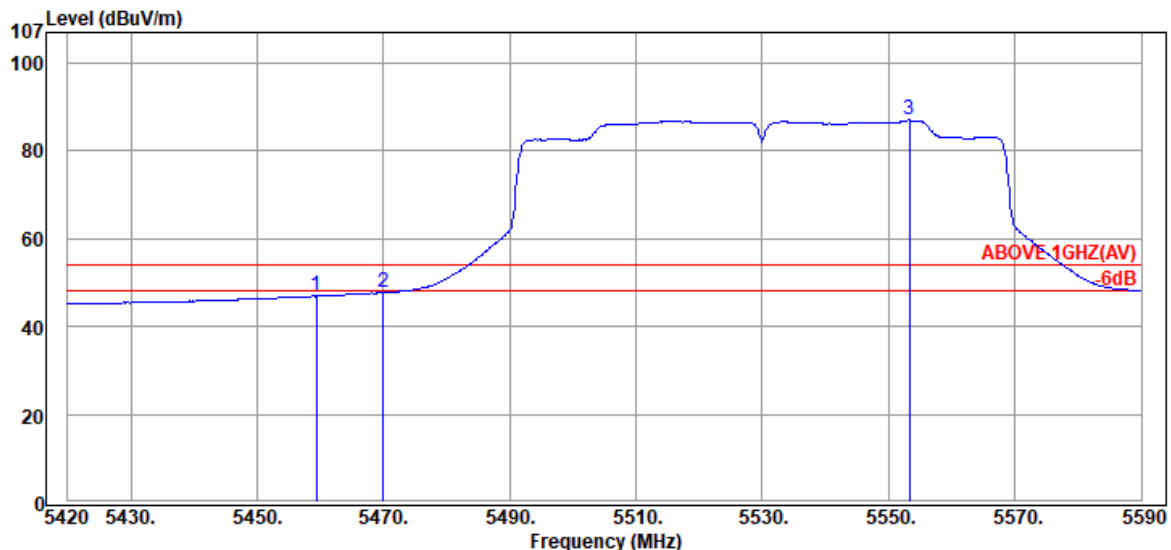

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.44	34.50	8.90	3.54	46.94	54.00	7.06	Average
5469.98	34.50	8.91	4.33	47.74	54.00	6.26	Average
@ 5553.28	34.61	8.95	43.42	86.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5690MHz

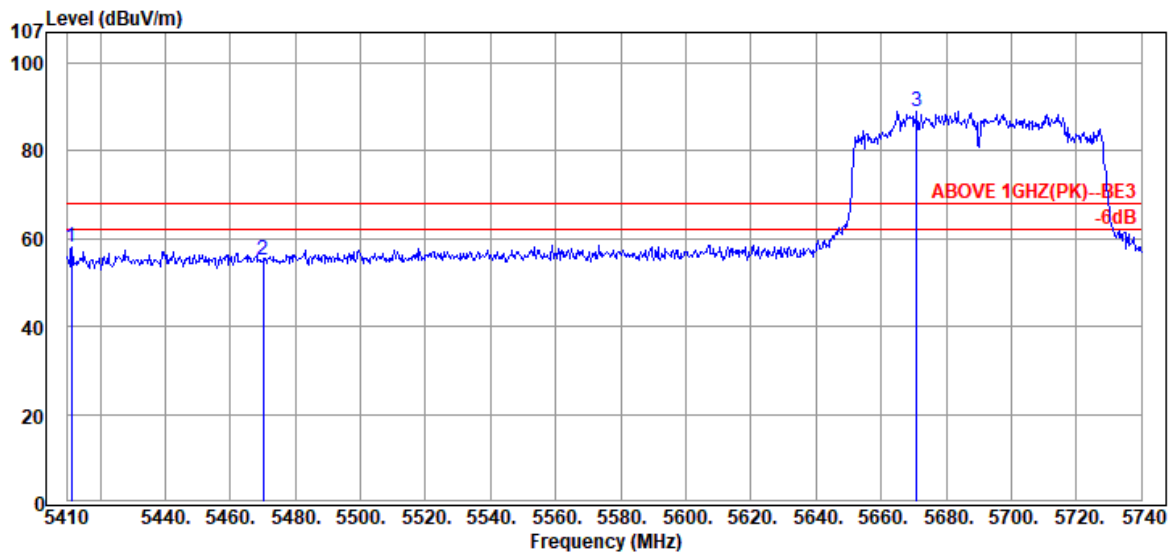

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.32	34.50	8.87	14.71	58.08	68.20	10.12	Peak
5470.06	34.50	8.91	11.74	55.15	68.20	13.05	Peak
@ 5671.03	34.52	9.01	45.47	89.00	---	---	Peak

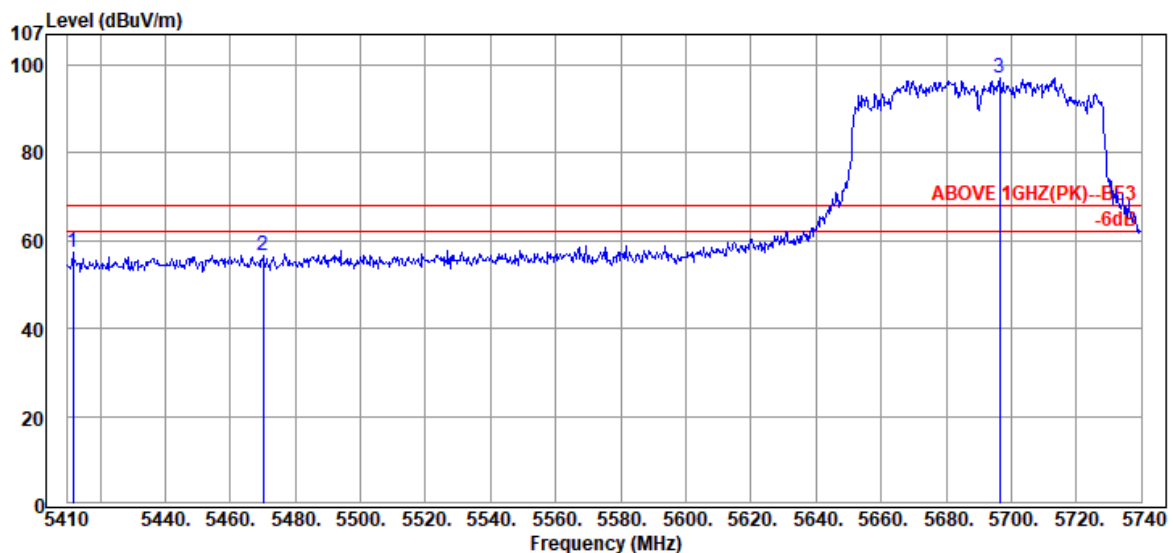

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.65	34.50	8.87	14.10	57.47	68.20	10.73	Peak
5470.06	34.50	8.91	13.03	56.44	68.20	11.76	Peak
@ 5696.44	34.41	9.03	53.72	97.16	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5690MHz

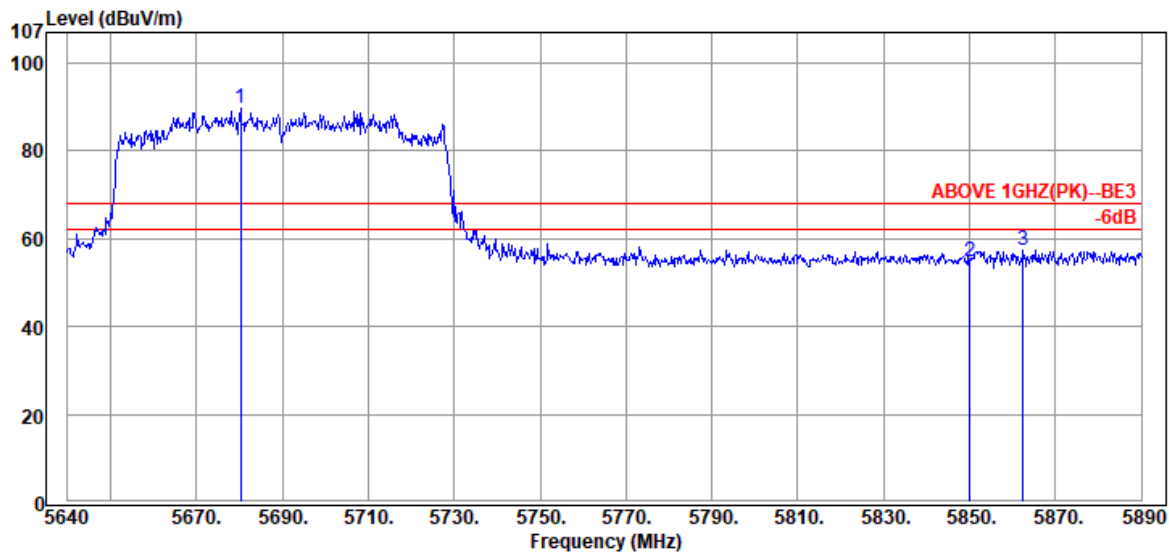

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5680.25	34.48	9.02	46.30	89.80	---	---	Peak
	5850.00	34.40	9.11	11.45	54.96	68.20	13.24	Peak
	5862.50	34.43	9.11	13.97	57.51	68.20	10.69	Peak

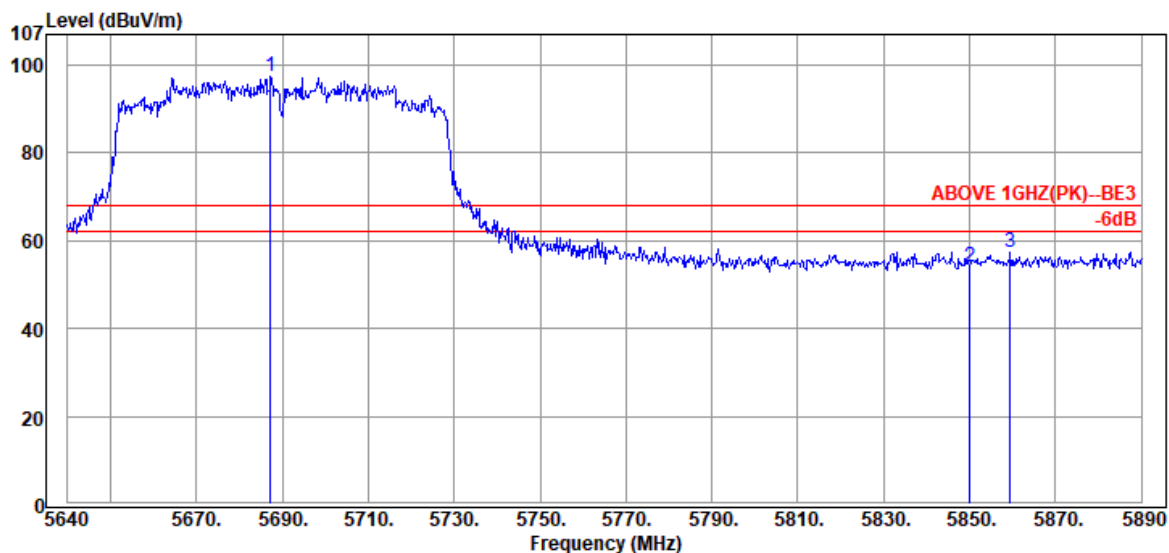

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5687.25	34.45	9.02	54.14	97.61	---	---	Peak
	5850.00	34.40	9.11	10.53	54.04	68.20	14.16	Peak
	5859.50	34.42	9.11	13.85	57.38	68.20	10.82	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

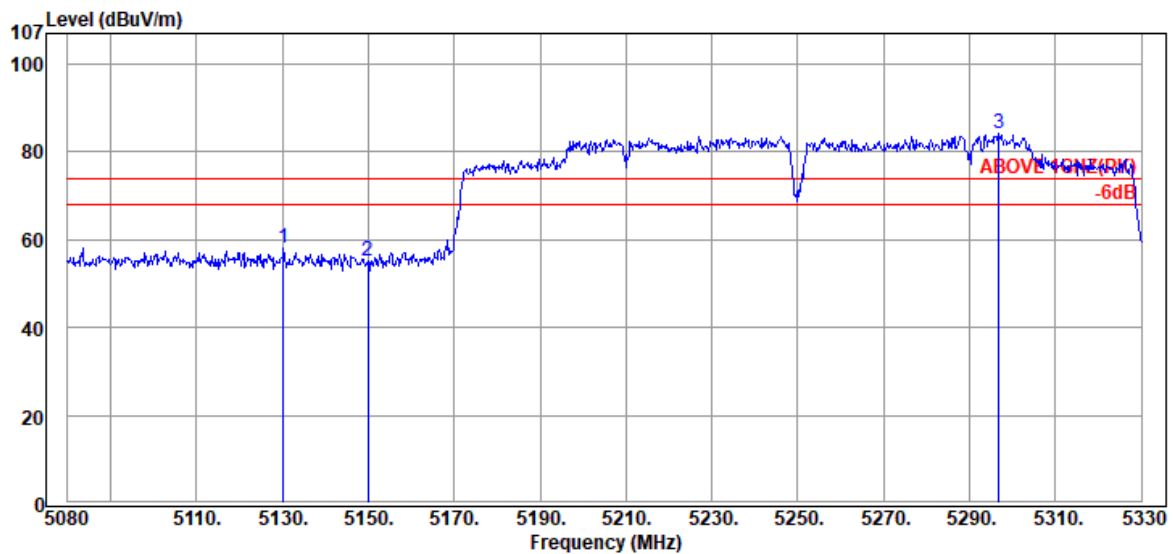

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.25	33.86	8.72	15.61	58.19	74.00	15.81	Peak
5150.00	33.90	8.73	12.64	55.27	74.00	18.73	Peak
@ 5296.75	34.49	8.81	41.00	84.30	---	---	Peak

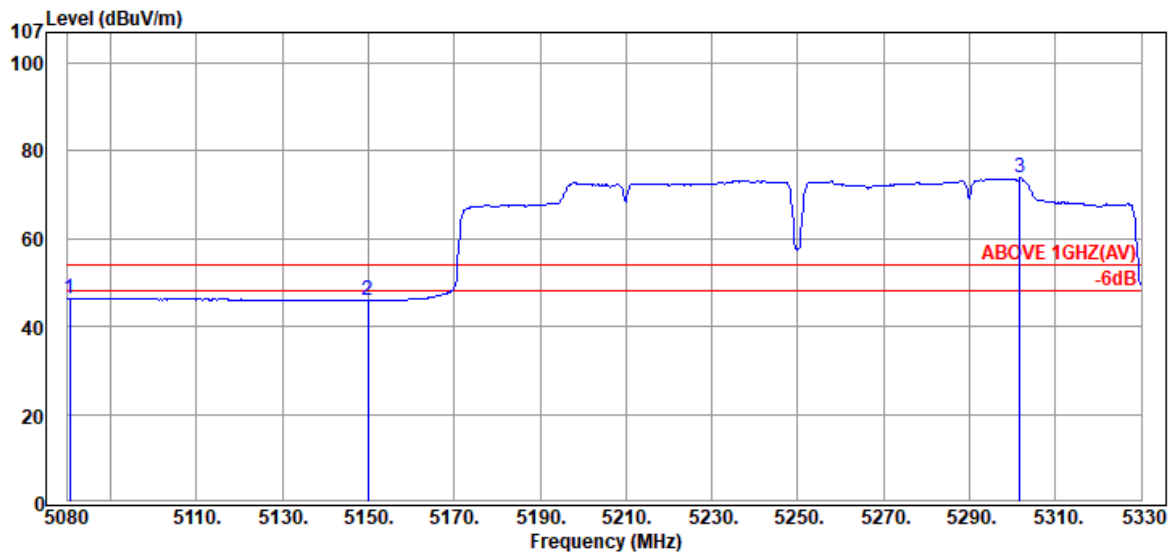

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.50	33.80	8.69	3.79	46.28	54.00	7.72	Average
5150.00	33.90	8.73	3.32	45.95	54.00	8.05	Average
@ 5301.75	34.50	8.81	30.54	73.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

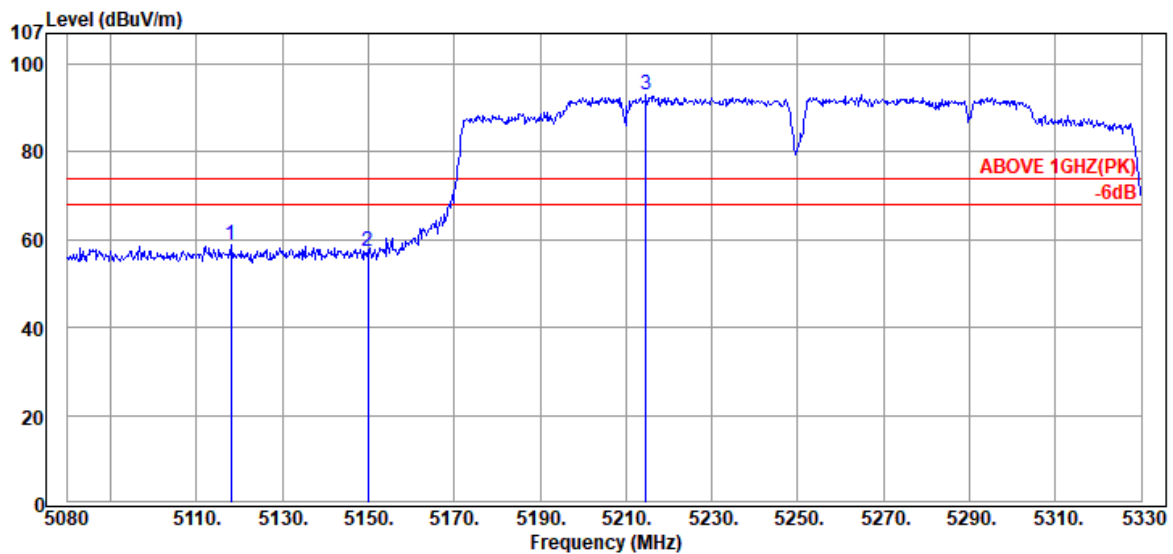

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.00	33.84	8.71	16.42	58.97	74.00	15.03	Peak
5150.00	33.90	8.73	14.62	57.25	74.00	16.75	Peak
@ 5214.75	34.19	8.76	50.10	93.05	---	---	Peak

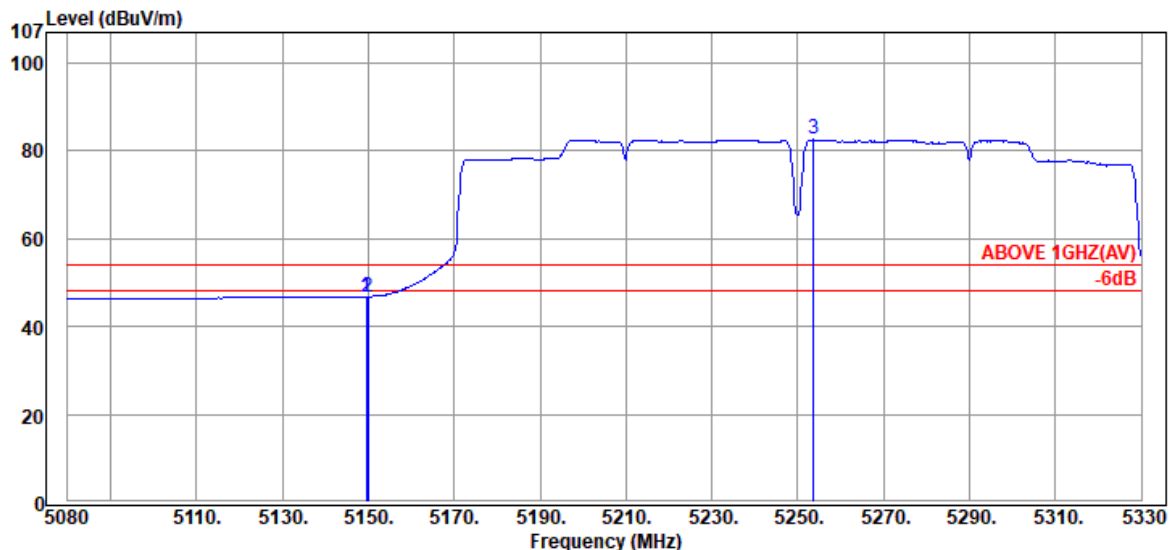

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	33.90	8.73	4.23	46.86	54.00	7.14	Average
5150.00	33.90	8.73	4.18	46.81	54.00	7.19	Average
@ 5253.75	34.41	8.79	39.35	82.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

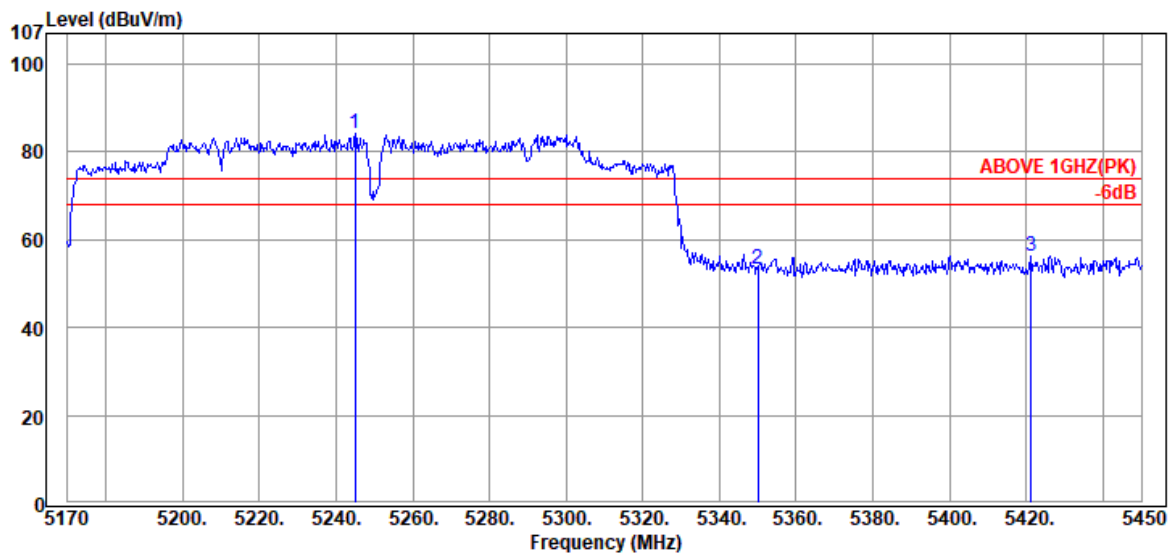

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5245.04	34.37	8.78	40.97	84.12	---	---	Peak
5350.04	34.50	8.84	9.92	53.26	74.00	20.74	Peak
5421.16	34.50	8.88	12.95	56.33	74.00	17.67	Peak

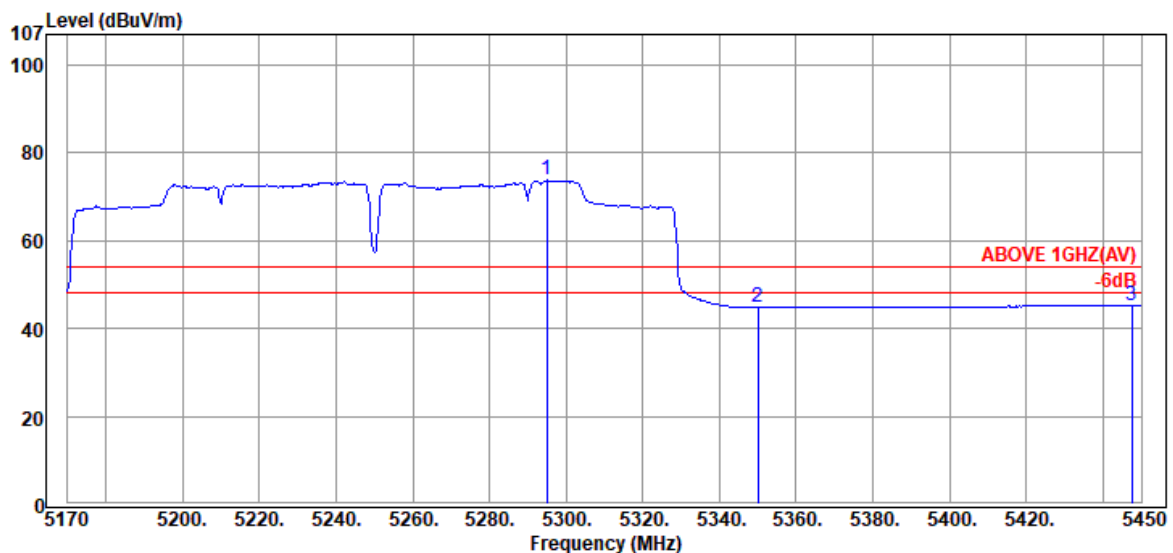

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.88	34.49	8.81	30.44	73.74	---	---	Average
5350.04	34.50	8.84	1.42	44.76	54.00	9.24	Average
5447.48	34.50	8.89	1.99	45.38	54.00	8.62	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	I& II-2A
		Frequency	TX 5250MHz

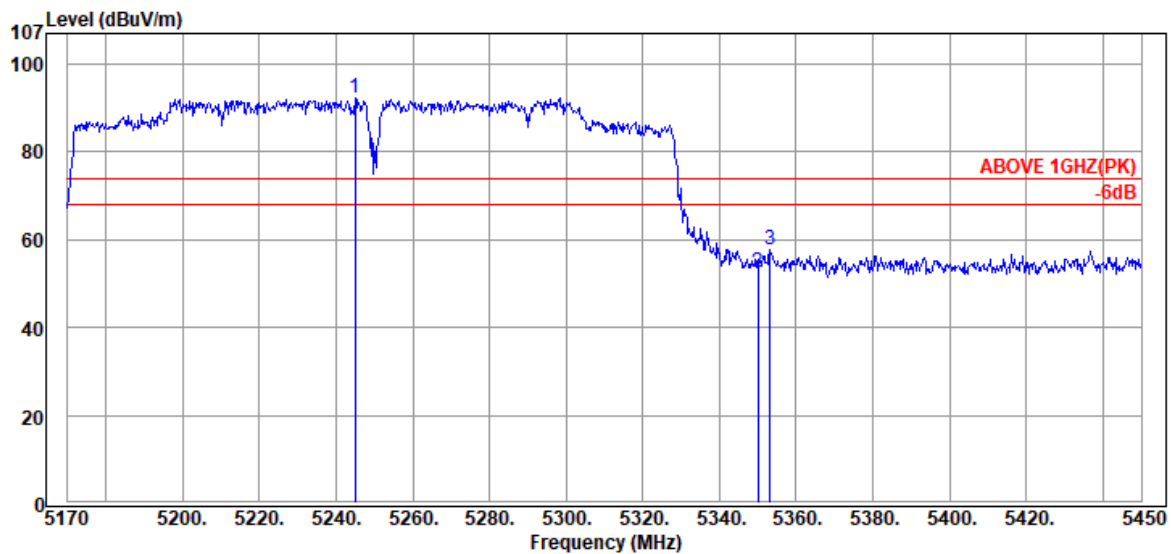

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5245.04	34.37	8.78	49.19	92.34	---	---	Peak
	5350.04	34.50	8.84	9.34	52.68	74.00	21.32	Peak
	5353.12	34.50	8.84	14.37	57.71	74.00	16.29	Peak

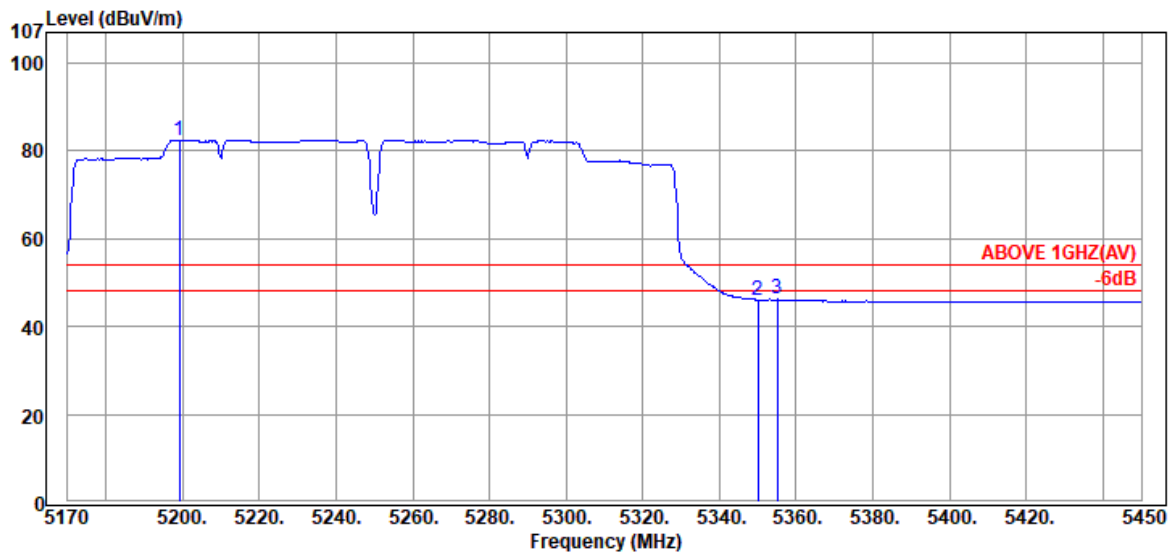

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5199.12	34.10	8.76	39.68	82.54	---	---	Average
	5350.04	34.50	8.84	2.79	46.13	54.00	7.87	Average
	5355.08	34.50	8.84	2.81	46.15	54.00	7.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

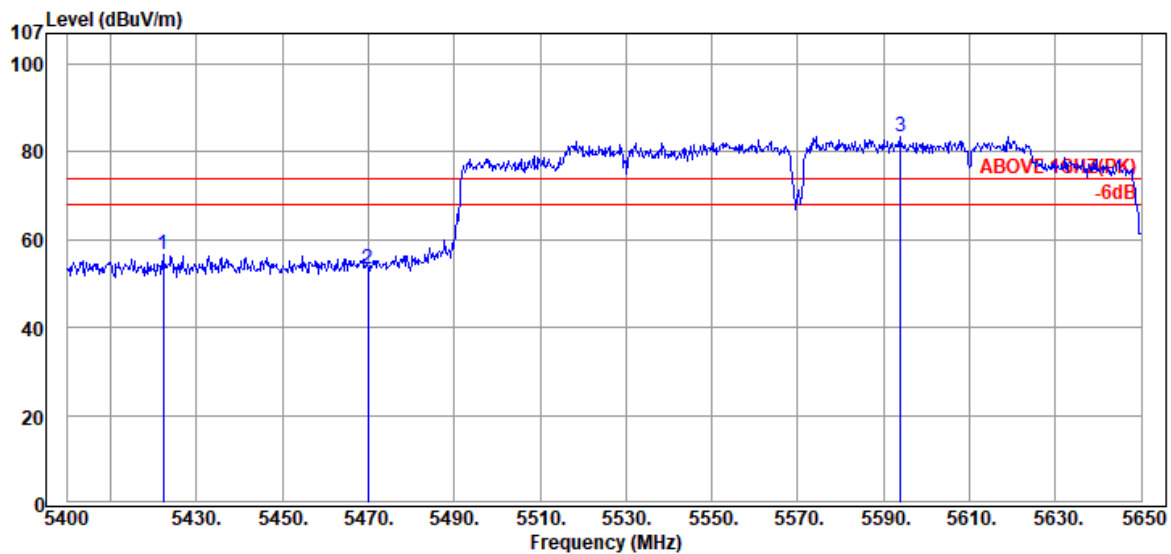

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.25	34.50	8.88	13.12	56.50	74.00	17.50	Peak
5470.00	34.50	8.91	9.81	53.22	74.00	20.78	Peak
@ 5594.00	34.69	8.97	39.95	83.61	---	---	Peak

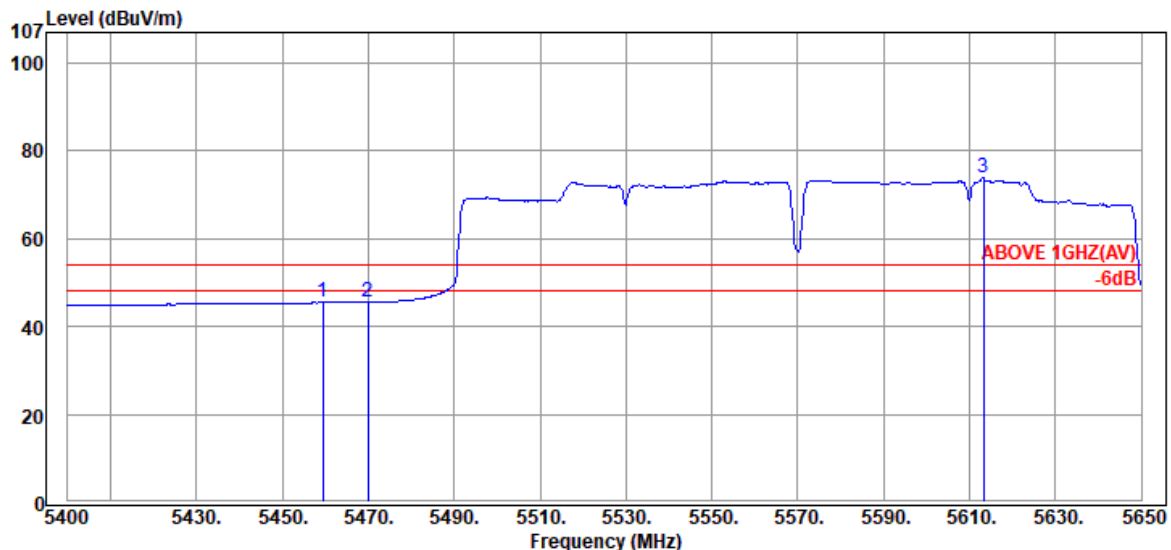

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.50	34.50	8.90	2.05	45.45	54.00	8.55	Average
5470.00	34.50	8.91	2.15	45.56	54.00	8.44	Average
@ 5613.25	34.67	8.98	30.14	73.79	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

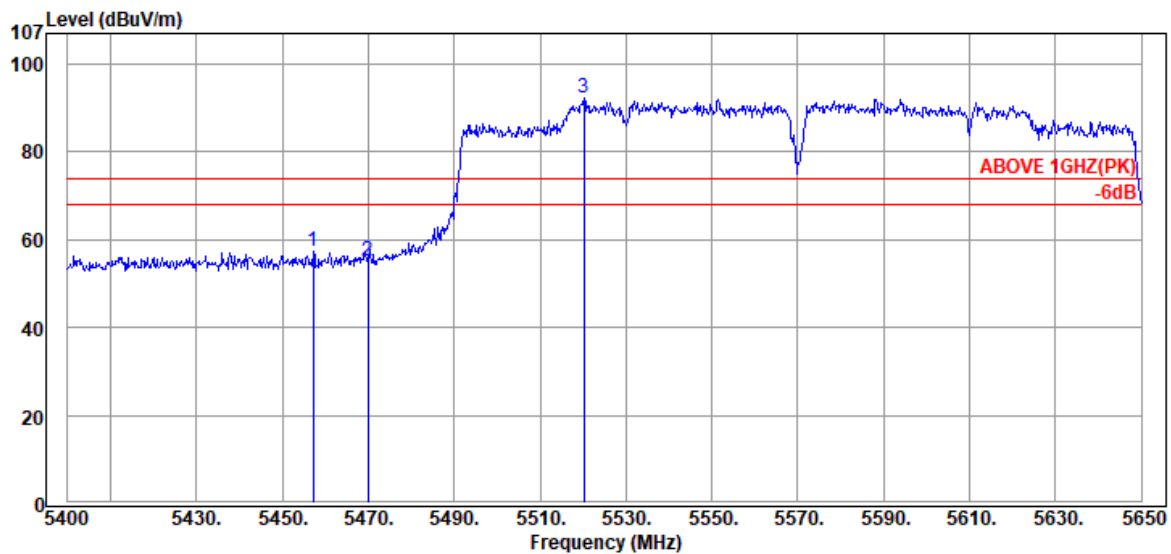

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.25	34.50	8.90	14.09	57.49	74.00	16.51	Peak
5470.00	34.50	8.91	11.84	55.25	74.00	18.75	Peak
@ 5520.25	34.54	8.93	48.77	92.24	---	---	Peak

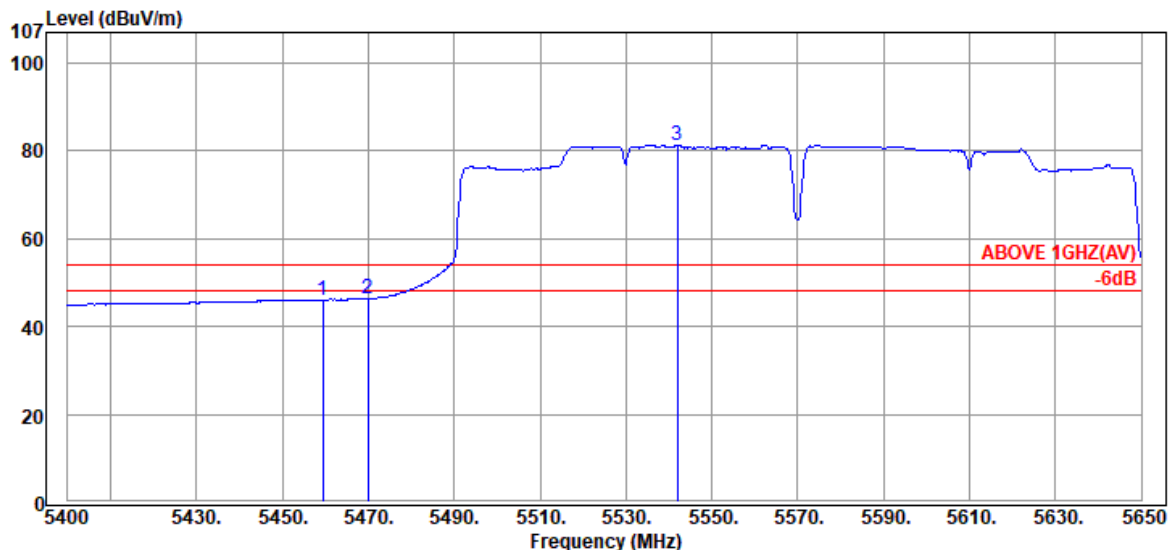

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.50	34.50	8.90	2.66	46.06	54.00	7.94	Average
5470.00	34.50	8.91	2.94	46.35	54.00	7.65	Average
@ 5542.00	34.58	8.94	37.90	81.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

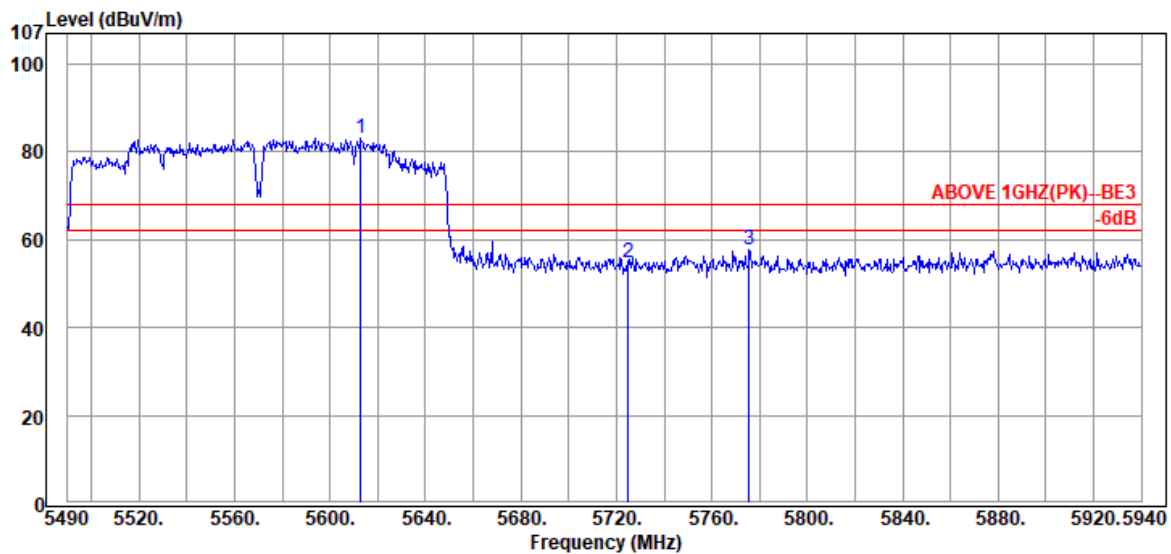

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5612.85	34.67	8.98	39.61	83.26	---	---	Peak
	5724.90	34.40	9.04	11.26	54.70	68.20	13.50	Peak
	5775.75	34.30	9.07	14.22	57.59	68.20	10.61	Peak

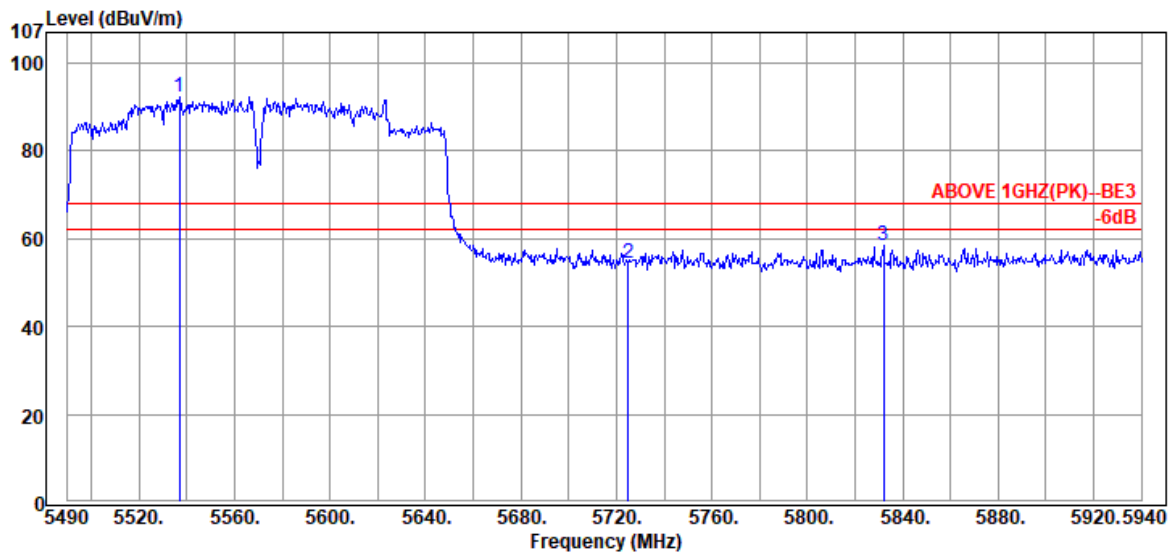

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5536.80	34.57	8.94	48.76	92.27	---	---	Peak
	5724.90	34.40	9.04	10.89	54.33	68.20	13.87	Peak
	5832.00	34.33	9.10	15.09	58.52	68.20	9.68	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

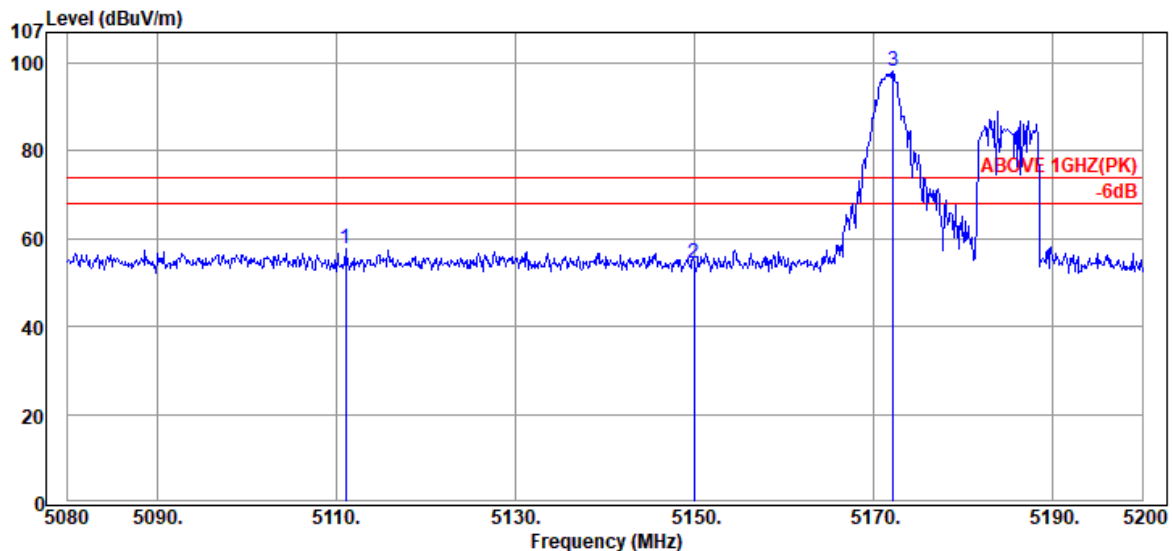

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.08	33.82	8.71	15.08	57.61	74.00	16.39	Peak
5149.96	33.90	8.73	11.71	54.34	74.00	19.66	Peak
@ 5172.16	33.99	8.74	55.55	98.28	---	---	Peak

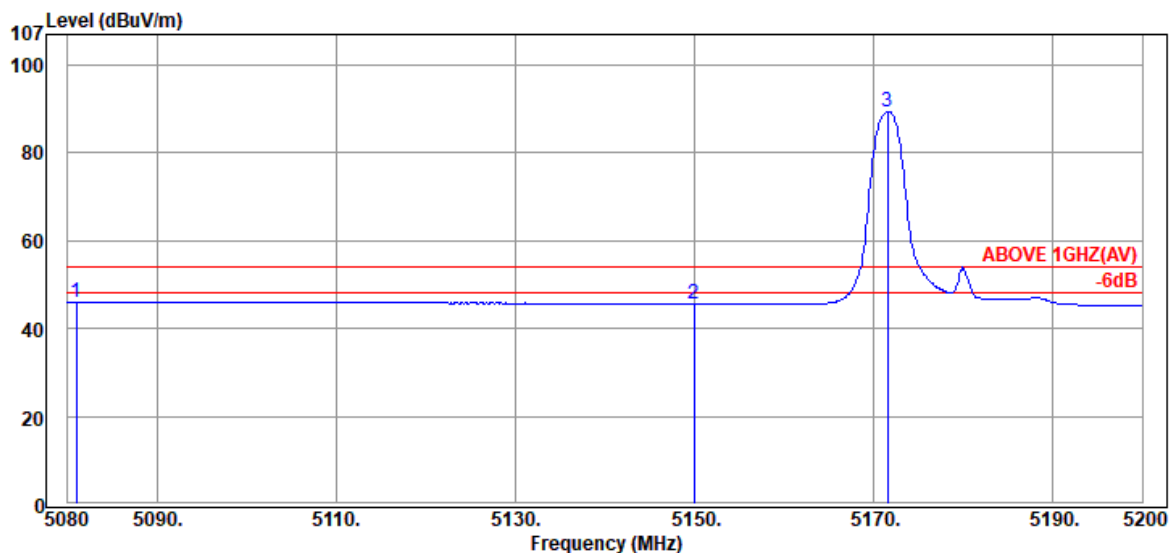

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.96	33.80	8.69	3.49	45.98	54.00	8.02	Average
5149.96	33.90	8.73	2.96	45.59	54.00	8.41	Average
@ 5171.56	33.99	8.74	46.58	89.31	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

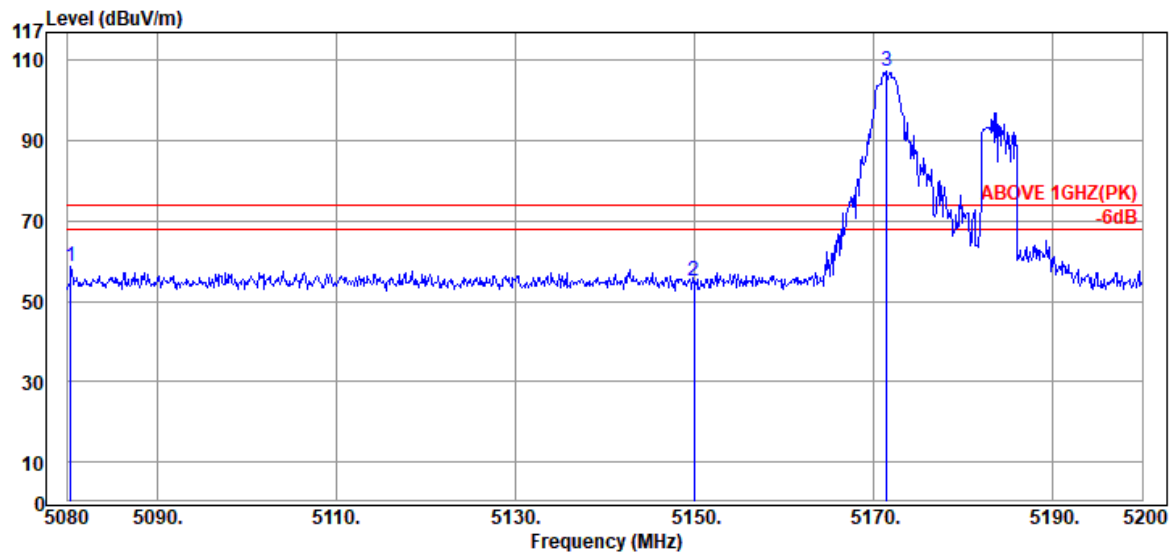

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.36	33.80	8.69	16.05	58.54	74.00	15.46	Peak
5149.96	33.90	8.73	12.57	55.20	74.00	18.80	Peak
@ 5171.44	33.99	8.74	64.68	107.41	---	---	Peak

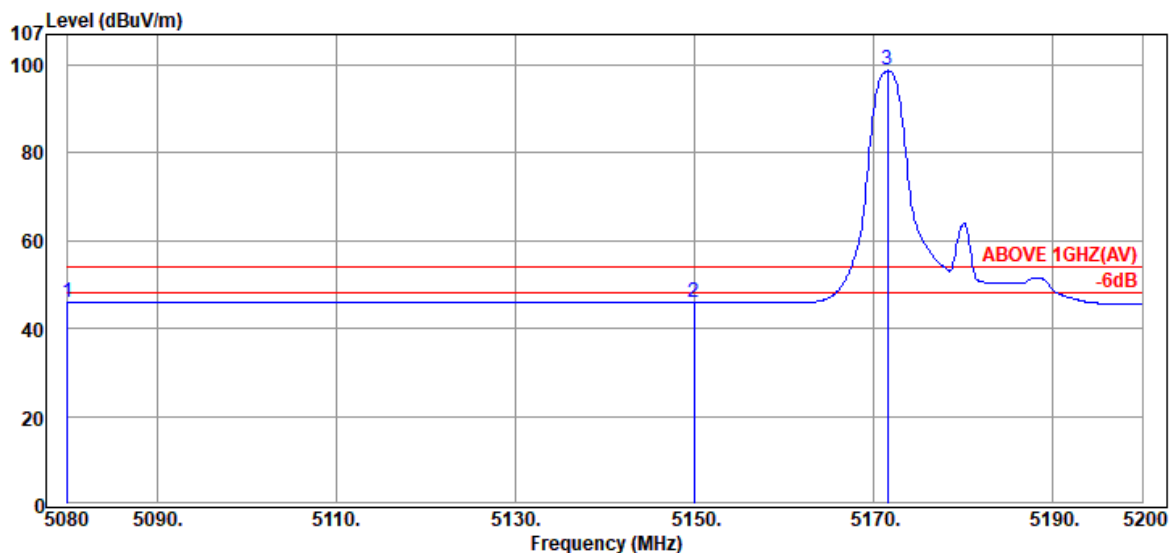

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.00	33.80	8.69	3.54	46.03	54.00	7.97	Average
5149.96	33.90	8.73	3.17	45.80	54.00	8.20	Average
@ 5171.56	33.99	8.74	56.02	98.75	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

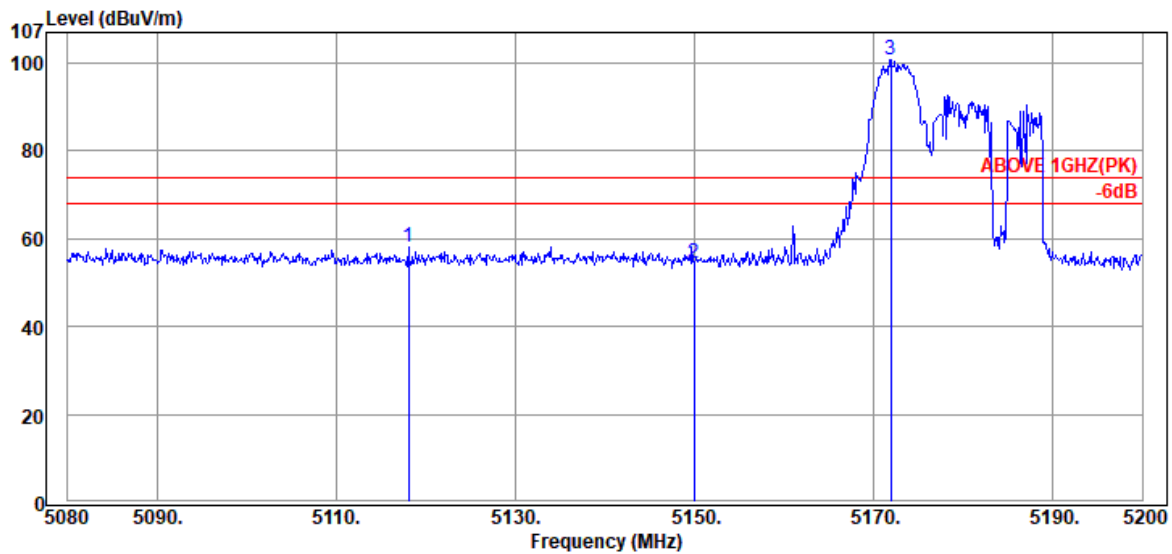

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.04	33.84	8.71	15.54	58.09	74.00	15.91	Peak
5149.96	33.90	8.73	11.64	54.27	74.00	19.73	Peak
@ 5171.92	33.99	8.74	58.11	100.84	---	---	Peak

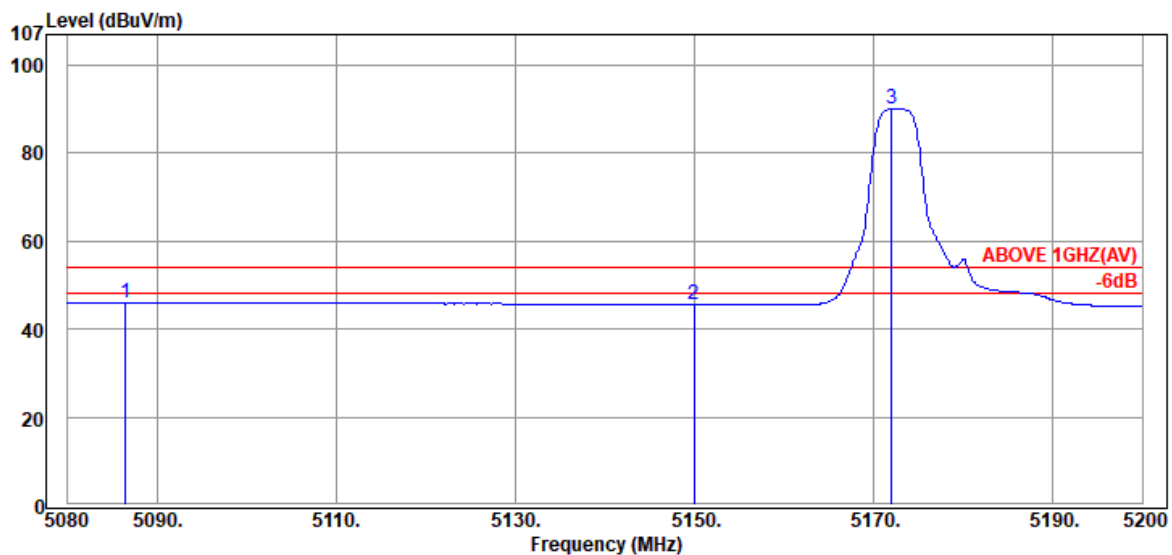

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5086.48	33.80	8.69	3.51	46.00	54.00	8.00	Average
5149.96	33.90	8.73	2.99	45.62	54.00	8.38	Average
@ 5172.04	33.99	8.74	47.42	90.15	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

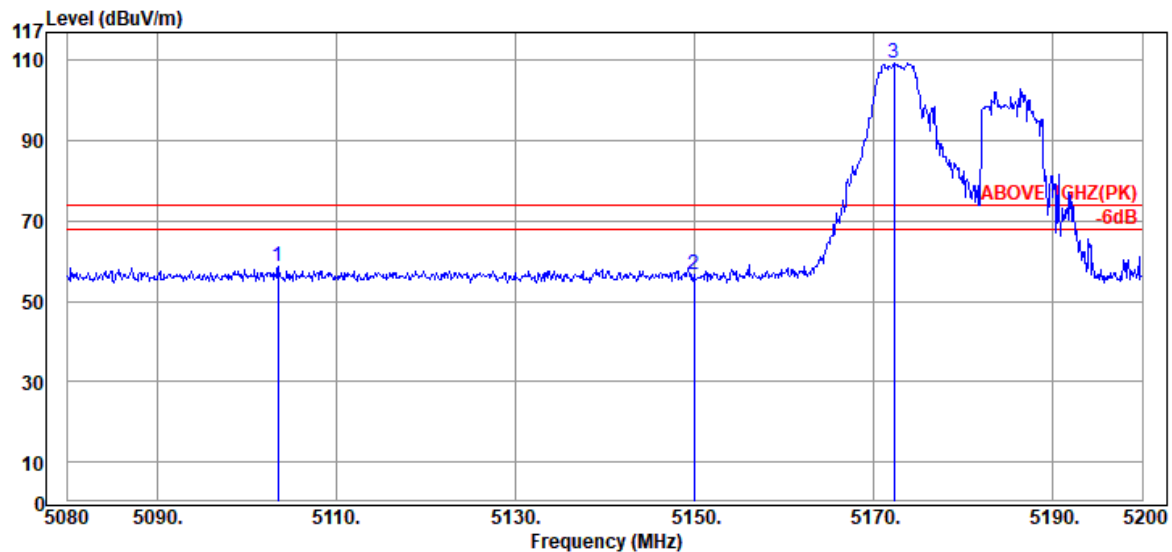

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.52	33.81	8.70	16.00	58.51	74.00	15.49	Peak
5149.96	33.90	8.73	14.09	56.72	74.00	17.28	Peak
@ 5172.28	33.99	8.74	66.74	109.47	---	---	Peak

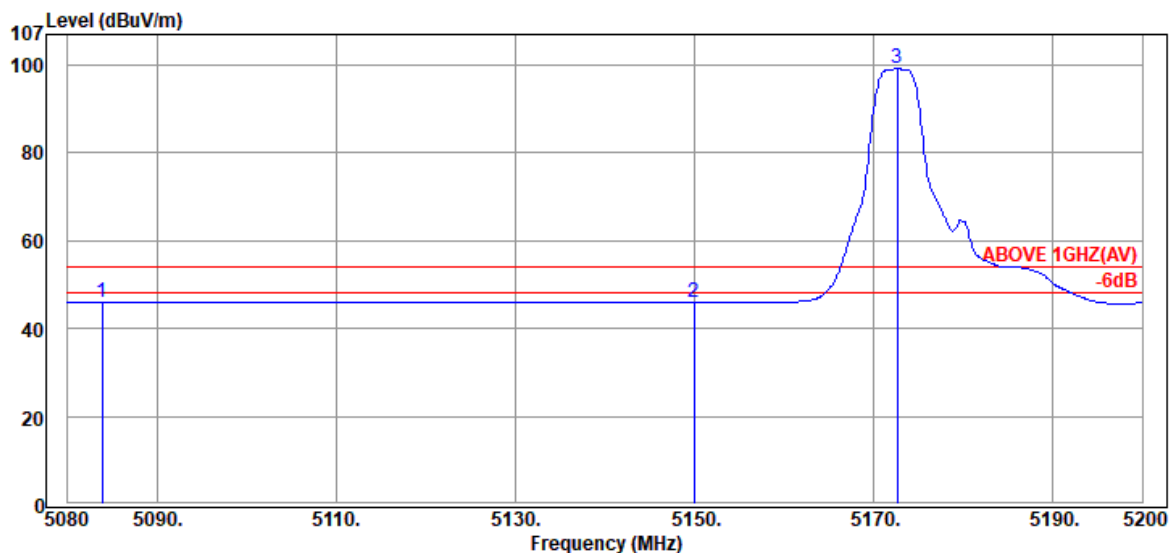

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5083.84	33.80	8.69	3.53	46.02	54.00	7.98	Average
5149.96	33.90	8.73	3.19	45.82	54.00	8.18	Average
@ 5172.64	33.99	8.74	56.43	99.16	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

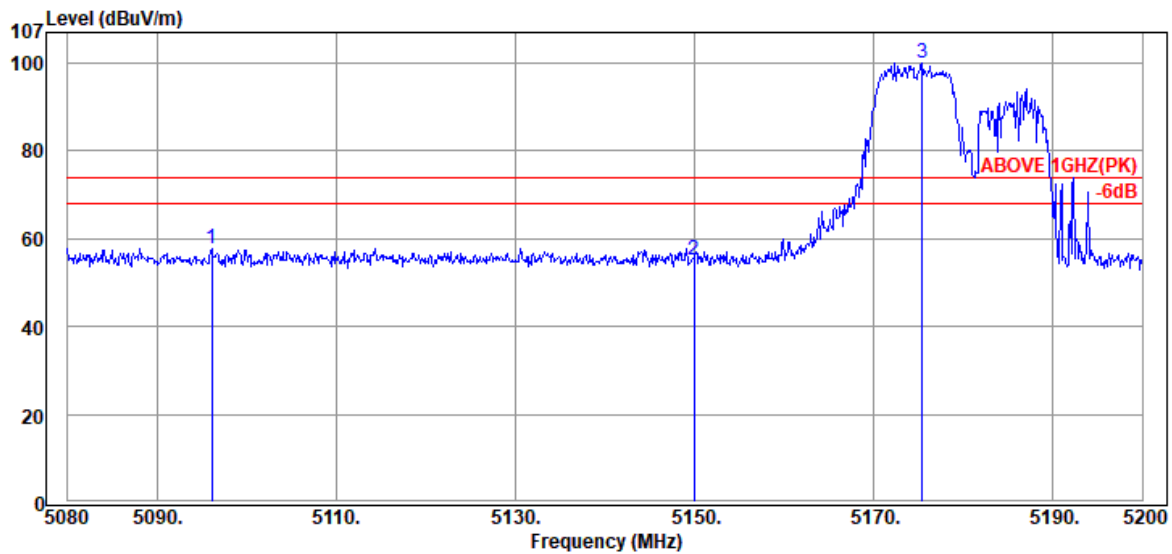

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5096.08	33.80	8.70	15.32	57.82	74.00	16.18	Peak
5149.96	33.90	8.73	12.39	55.02	74.00	18.98	Peak
@ 5175.40	34.00	8.74	57.26	100.00	---	---	Peak

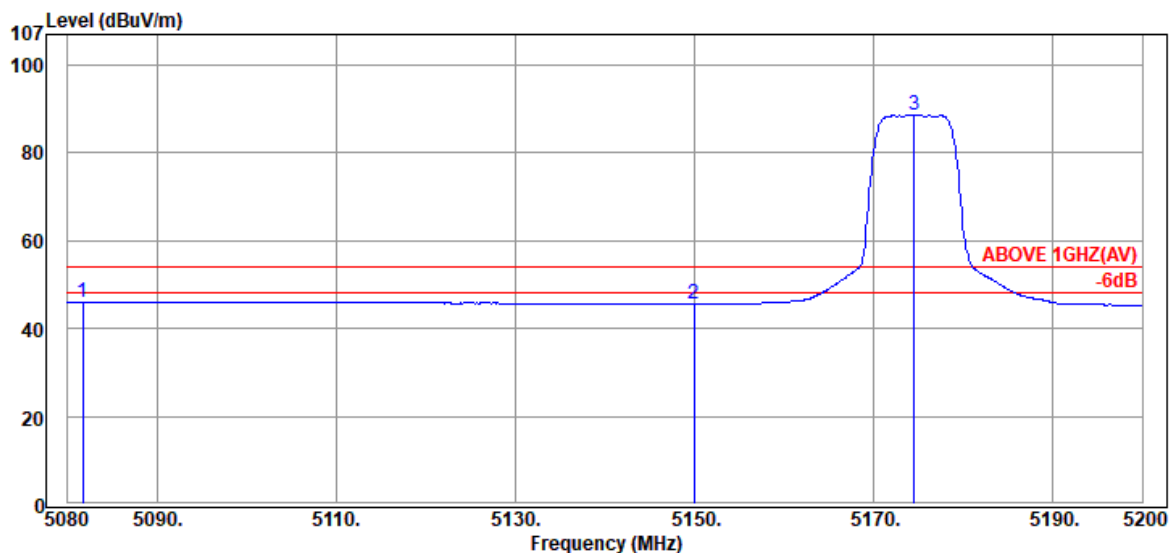

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5081.68	33.80	8.69	3.49	45.98	54.00	8.02	Average
5149.96	33.90	8.73	3.01	45.64	54.00	8.36	Average
@ 5174.56	34.00	8.74	45.76	88.50	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

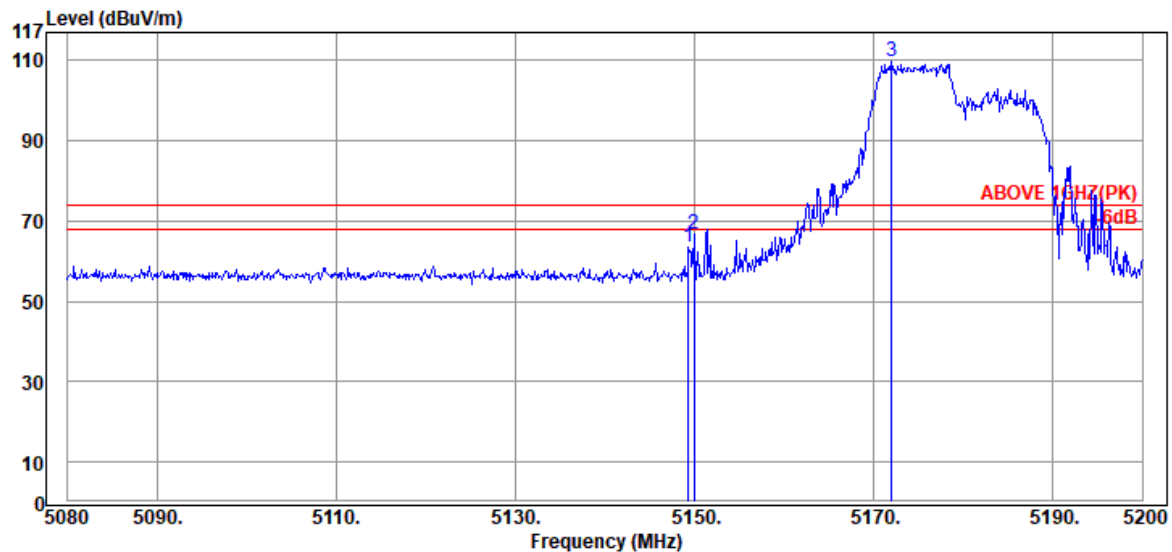

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.36	33.90	8.73	21.09	63.72	74.00	10.28	Peak
5149.96	33.90	8.73	23.92	66.55	74.00	7.45	Peak
@ 5172.04	33.99	8.74	67.05	109.78	---	---	Peak

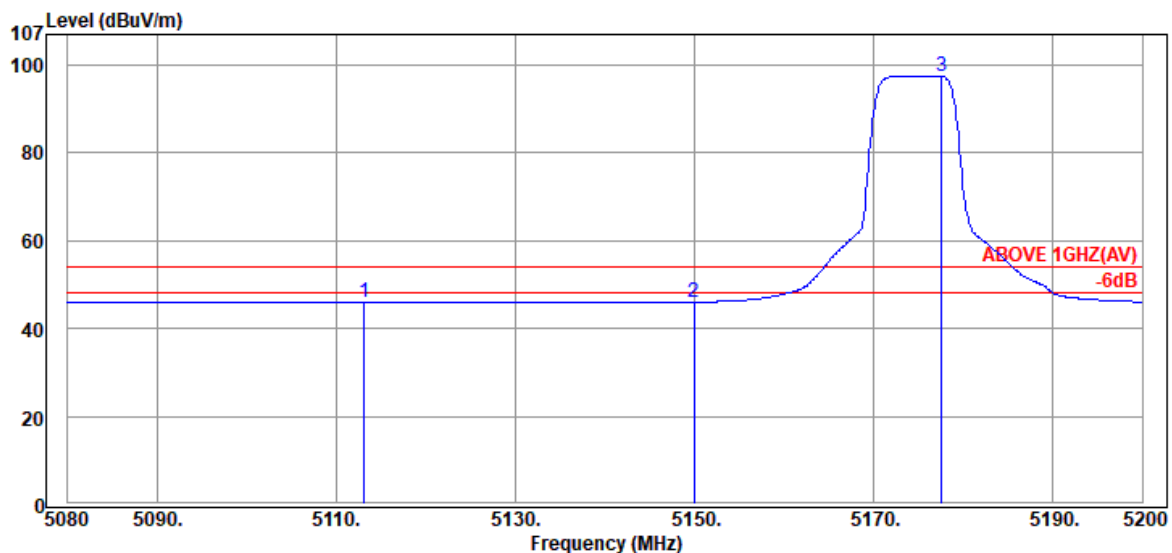

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.12	33.83	8.71	3.48	46.02	54.00	7.98	Average
5149.96	33.90	8.73	3.37	46.00	54.00	8.00	Average
@ 5177.56	34.01	8.74	54.74	97.49	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	26/8	Frequency	TX 5320MHz

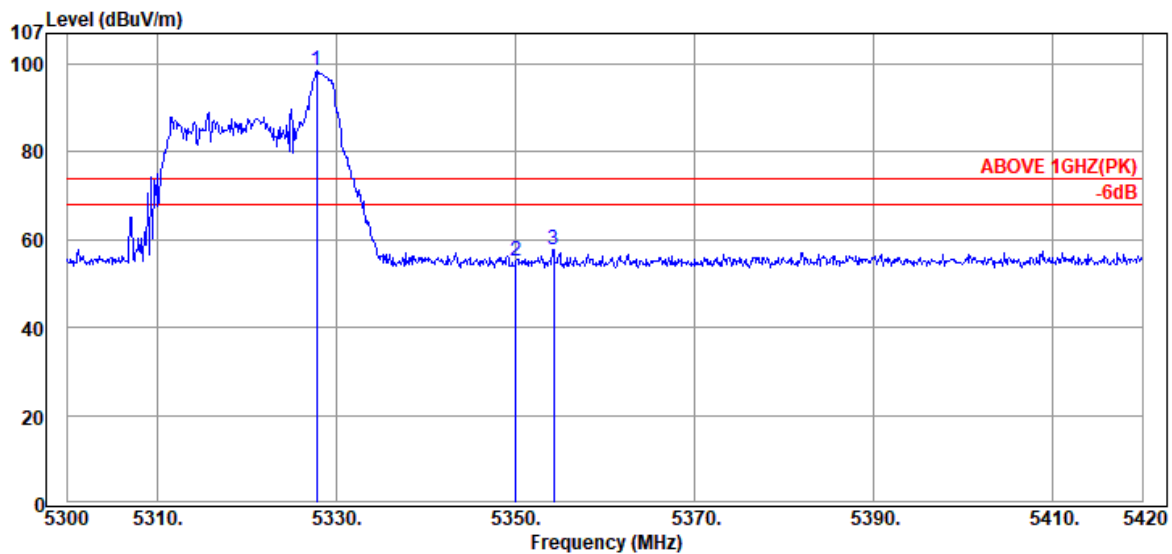

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.84	34.50	8.83	55.18	98.51	---	---	Peak
	5350.04	34.50	8.84	11.68	55.02	74.00	18.98	Peak
	5354.24	34.50	8.84	14.48	57.82	74.00	16.18	Peak

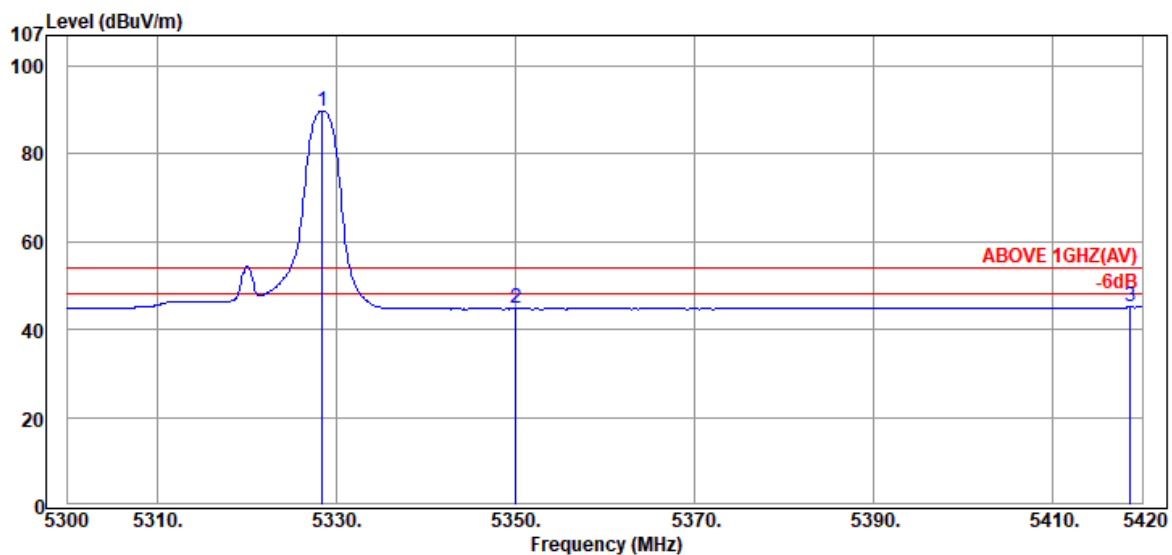

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.44	34.50	8.83	46.51	89.84	---	---	Average
	5350.04	34.50	8.84	1.35	44.69	54.00	9.31	Average
	5418.68	34.50	8.88	1.72	45.10	54.00	8.90	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	26/8	Frequency	TX 5320MHz

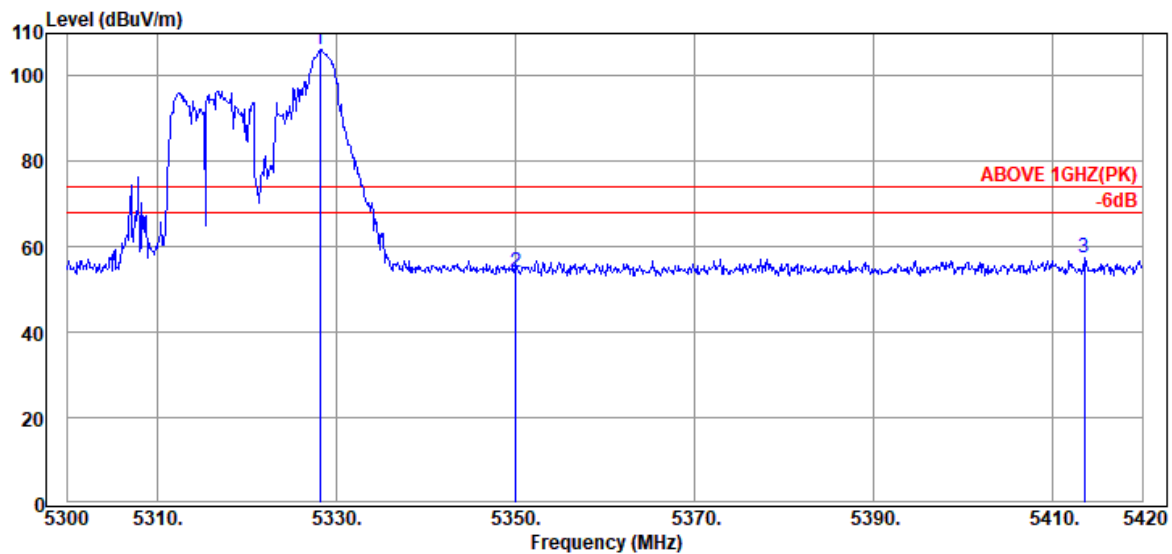

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.20	34.50	8.83	62.77	106.10	---	---	Peak
	5350.04	34.50	8.84	10.56	53.90	74.00	20.10	Peak
	5413.52	34.50	8.88	14.05	57.43	74.00	16.57	Peak

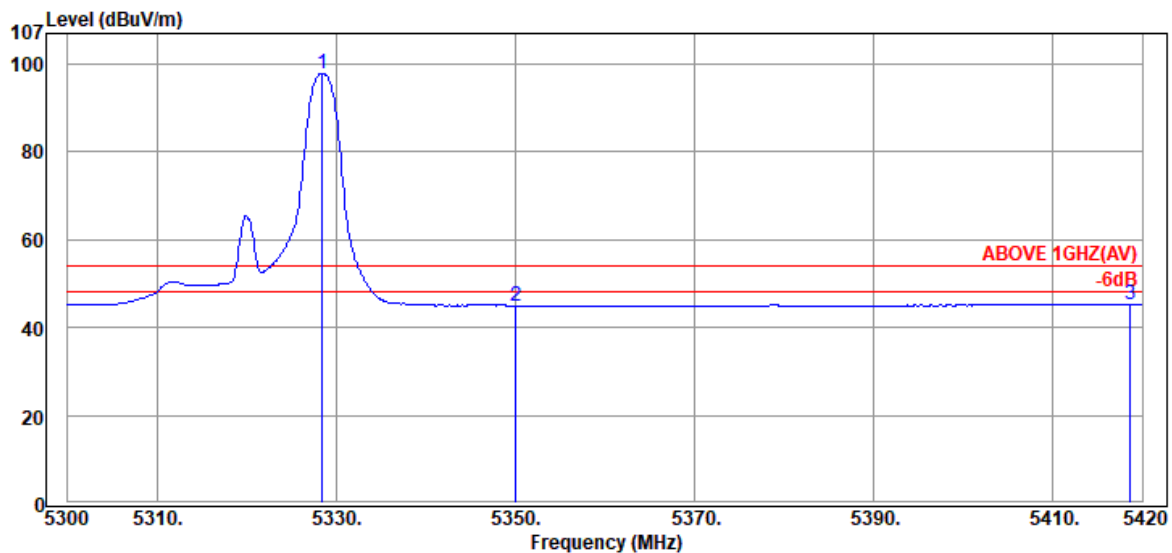

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.44	34.50	8.83	54.58	97.91	---	---	Average
	5350.04	34.50	8.84	1.62	44.96	54.00	9.04	Average
	5418.68	34.50	8.88	1.83	45.21	54.00	8.79	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	52/40	Frequency	TX 5320MHz

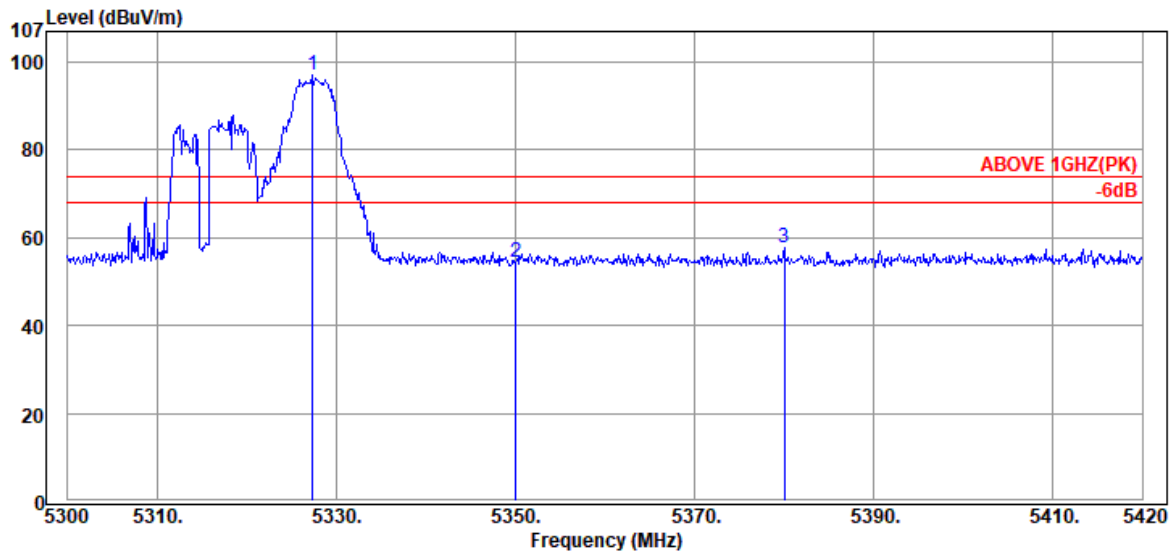

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.36	34.50	8.83	53.77	97.10	---	---	Peak
5350.04	34.50	8.84	10.94	54.28	74.00	19.72	Peak
5380.04	34.50	8.86	14.39	57.75	74.00	16.25	Peak

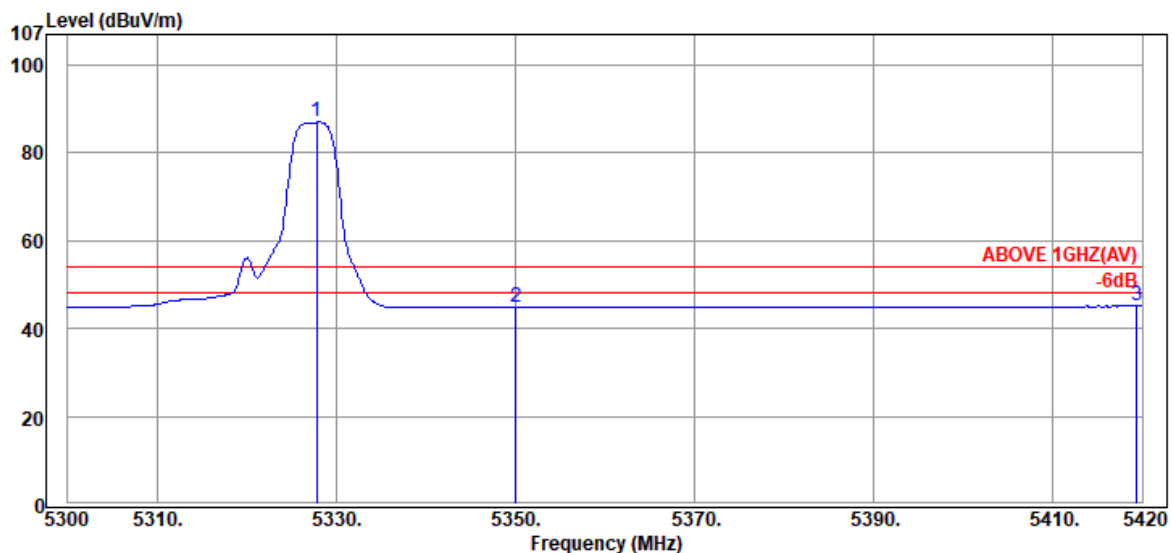

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.84	34.50	8.83	43.68	87.01	---	---	Average
5350.04	34.50	8.84	1.37	44.71	54.00	9.29	Average
5419.40	34.50	8.88	1.71	45.09	54.00	8.91	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	52/40	Frequency	TX 5320MHz

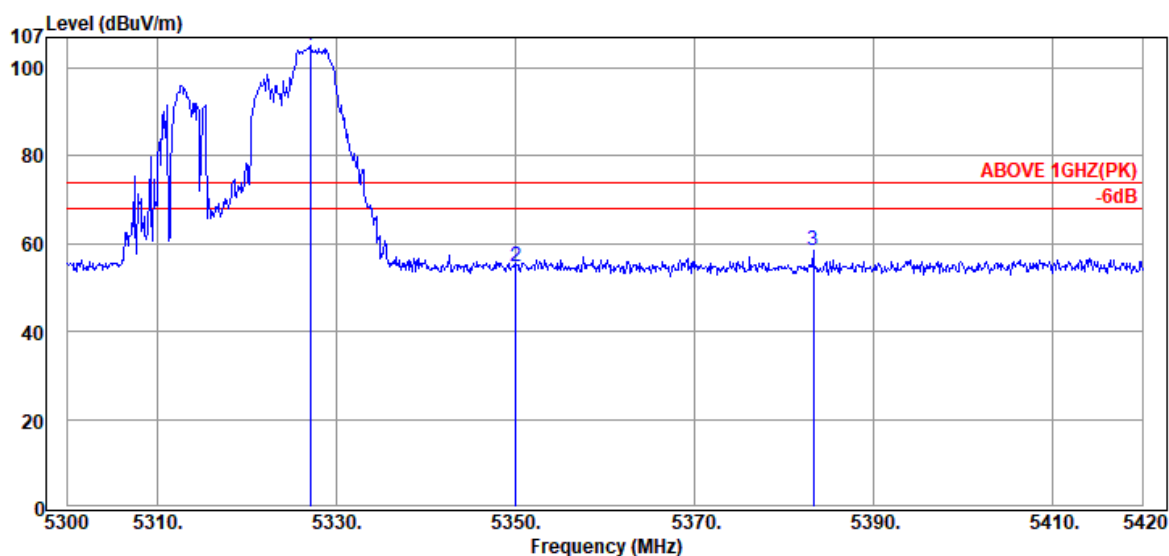

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.12	34.50	8.83	61.83	105.16	---	---	Peak
	5350.04	34.50	8.84	11.62	54.96	74.00	19.04	Peak
	5383.28	34.50	8.86	15.02	58.38	74.00	15.62	Peak

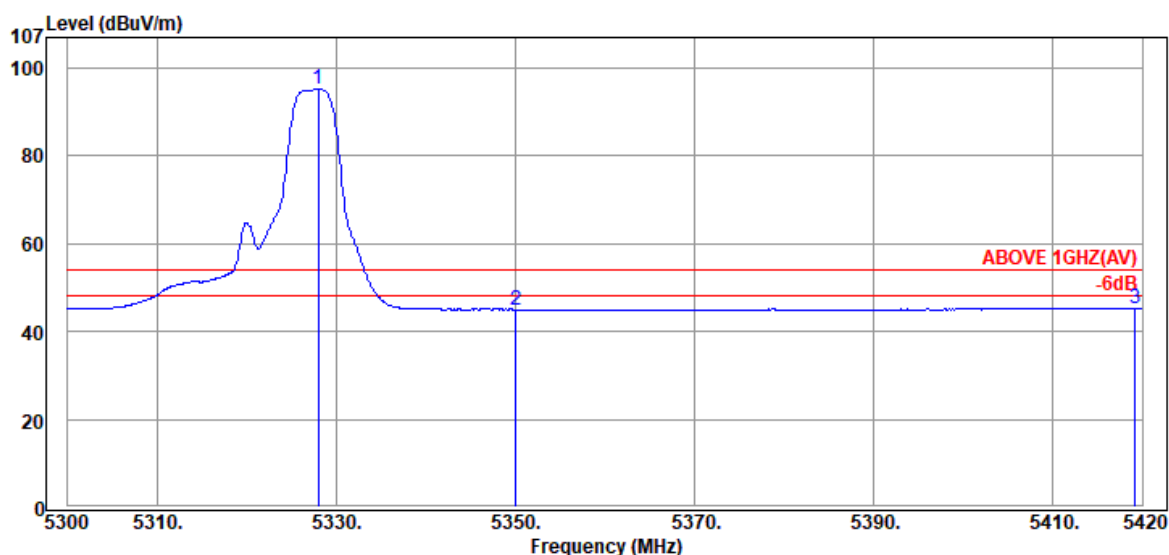

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.96	34.50	8.83	51.90	95.23	---	---	Average
	5350.04	34.50	8.84	1.69	45.03	54.00	8.97	Average
	5419.16	34.50	8.88	1.81	45.19	54.00	8.81	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	106/54	Frequency	TX 5320MHz

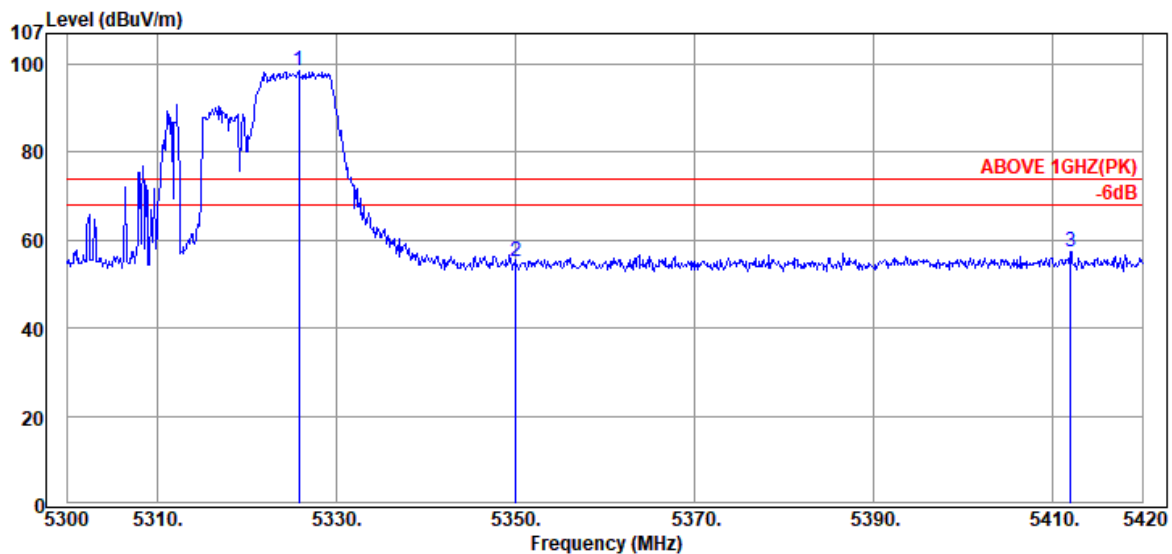

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.80	34.50	8.83	55.24	98.57	---	---	Peak
5350.04	34.50	8.84	11.98	55.32	74.00	18.68	Peak
5411.96	34.50	8.87	13.92	57.29	74.00	16.71	Peak

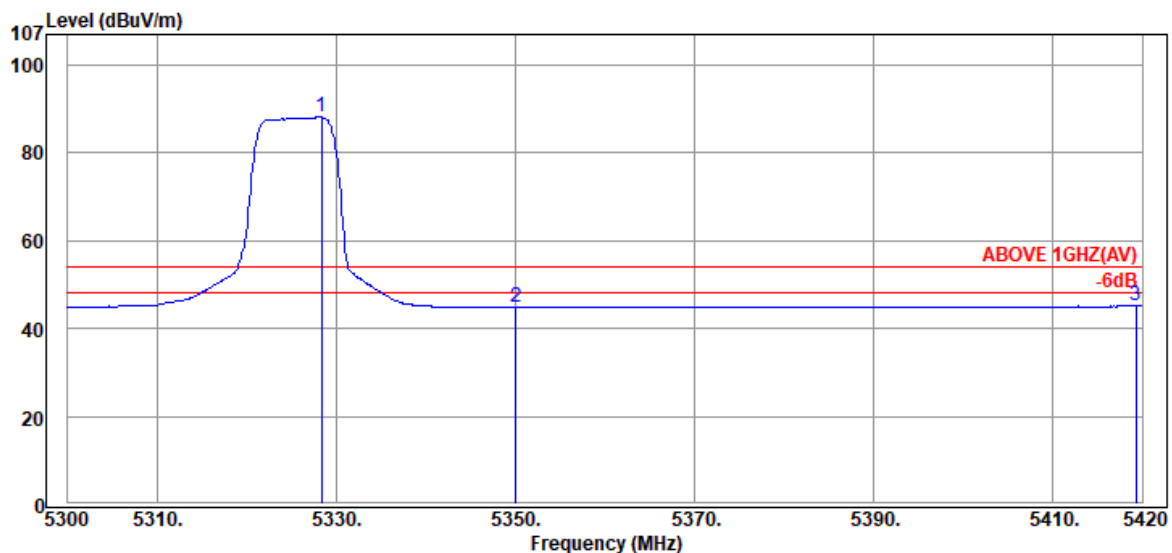

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.32	34.50	8.83	44.80	88.13	---	---	Average
5350.04	34.50	8.84	1.42	44.76	54.00	9.24	Average
5419.28	34.50	8.88	1.72	45.10	54.00	8.90	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2A
RU Configuration	106/54	Frequency	TX 5320MHz

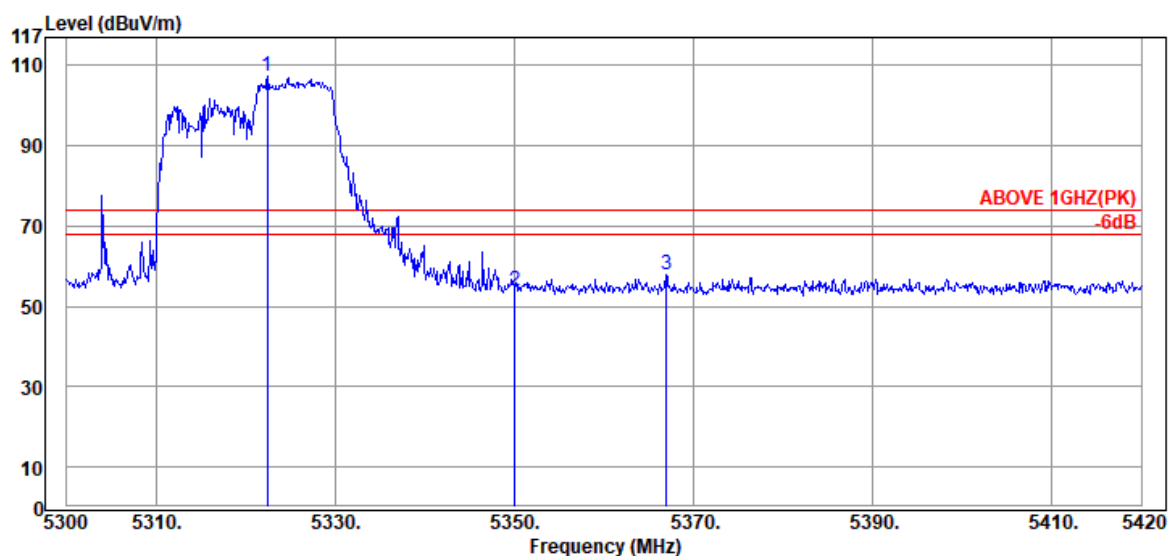

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5322.44	34.50	8.83	63.86	107.19	---	---	Peak
	5350.04	34.50	8.84	10.73	54.07	74.00	19.93	Peak
	5366.96	34.50	8.85	14.48	57.83	74.00	16.17	Peak

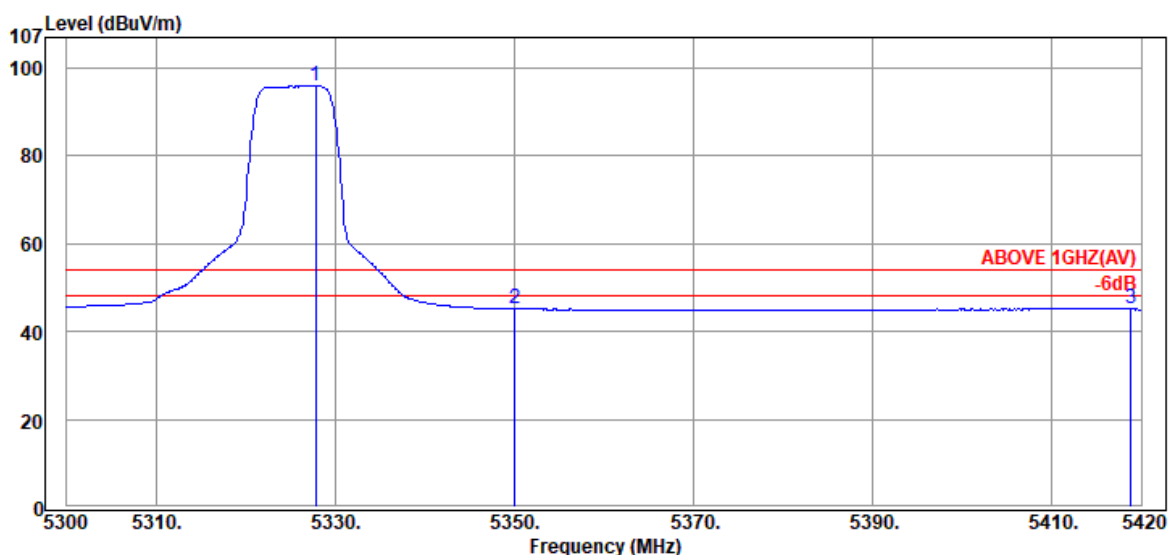

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.84	34.50	8.83	52.60	95.93	---	---	Average
	5350.04	34.50	8.84	1.81	45.15	54.00	8.85	Average
	5418.80	34.50	8.88	1.80	45.18	54.00	8.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	26/0	Frequency	TX 5500MHz

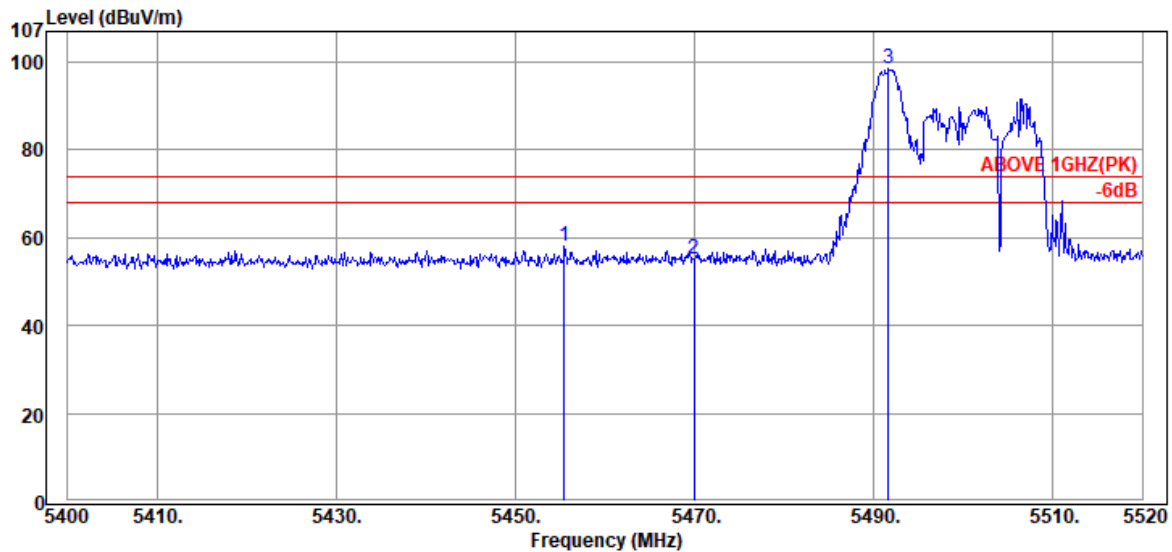

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.44	34.50	8.90	14.68	58.08	74.00	15.92	Peak
5469.96	34.50	8.91	11.74	55.15	74.00	18.85	Peak
@ 5491.68	34.50	8.92	55.01	98.43	---	---	Peak

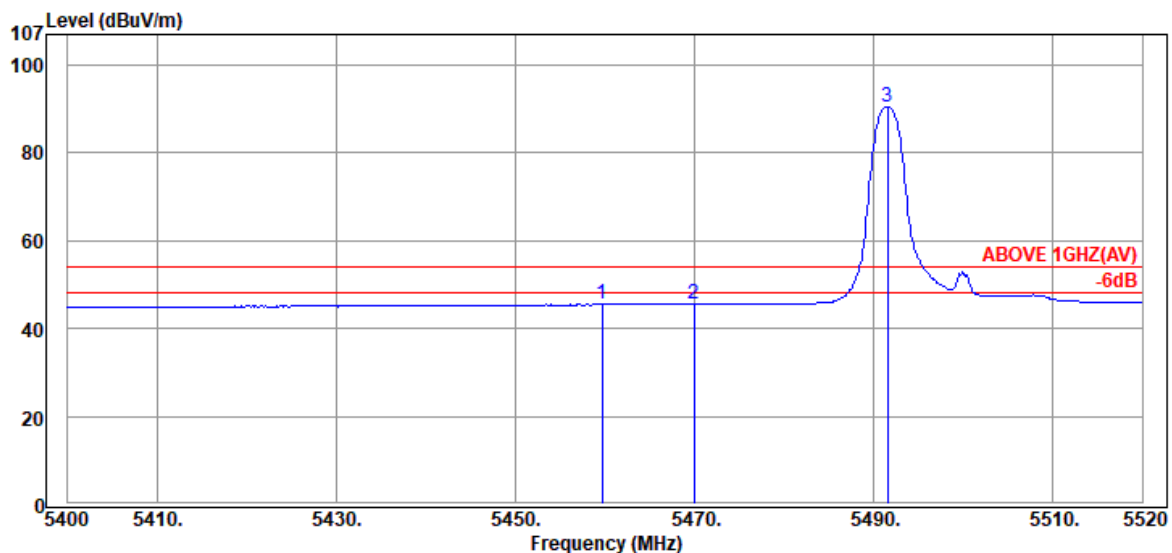

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.64	34.50	8.90	2.06	45.46	54.00	8.54	Average
5469.96	34.50	8.91	2.15	45.56	54.00	8.44	Average
@ 5491.56	34.50	8.92	47.15	90.57	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	26/0	Frequency	TX 5500MHz

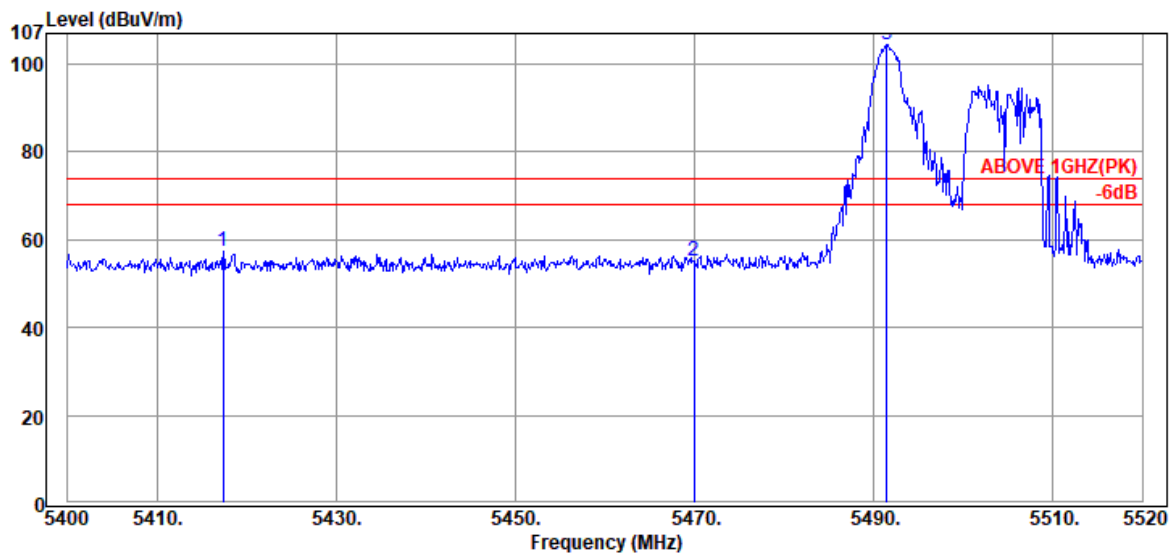

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.40	34.50	8.88	13.81	57.19	74.00	16.81	Peak
5469.96	34.50	8.91	11.59	55.00	74.00	19.00	Peak
@ 5491.44	34.50	8.92	60.89	104.31	---	---	Peak

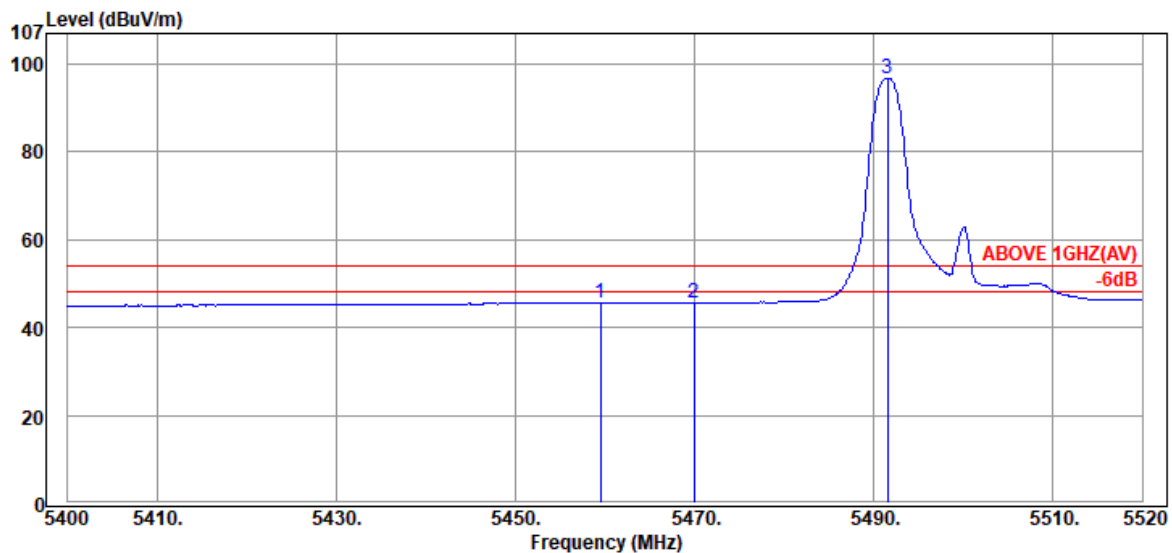

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.52	34.50	8.90	2.18	45.58	54.00	8.42	Average
5469.96	34.50	8.91	2.28	45.69	54.00	8.31	Average
@ 5491.56	34.50	8.92	53.39	96.81	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	52/37	Frequency	TX 5500MHz

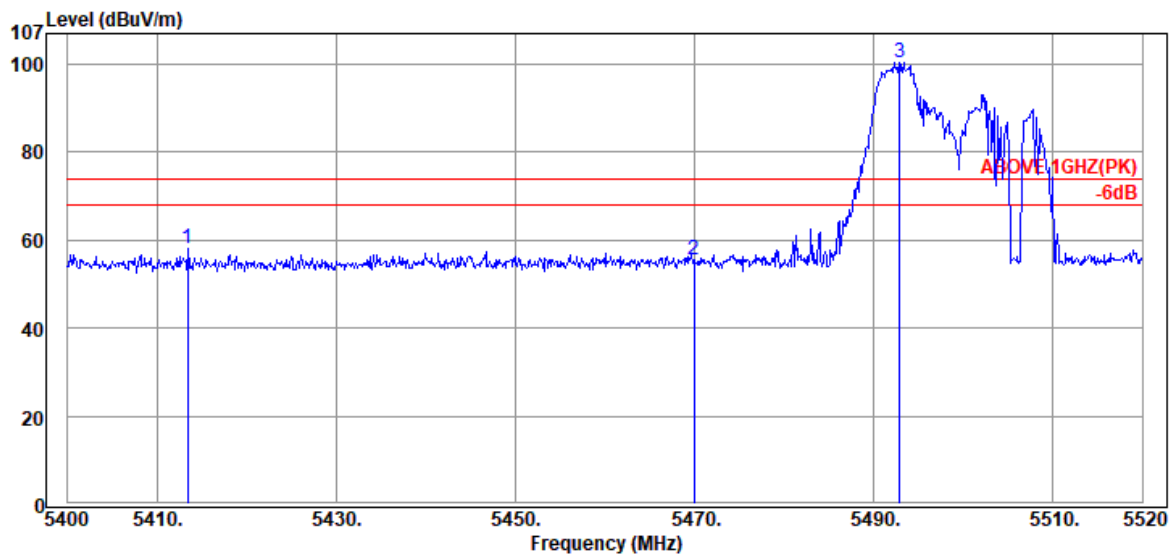

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.44	34.50	8.88	14.62	58.00	74.00	16.00	Peak
5469.96	34.50	8.91	12.01	55.42	74.00	18.58	Peak
@ 5492.88	34.50	8.92	56.98	100.40	---	---	Peak

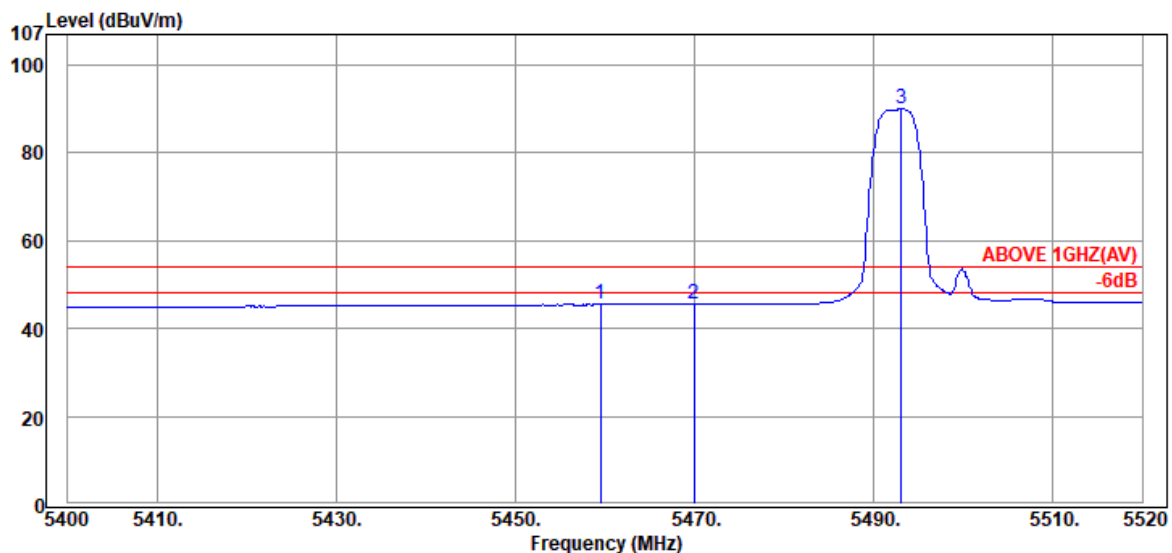

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.52	34.50	8.90	2.06	45.46	54.00	8.54	Average
5469.96	34.50	8.91	2.17	45.58	54.00	8.42	Average
@ 5493.12	34.50	8.92	46.53	89.95	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	52/37	Frequency	TX 5500MHz

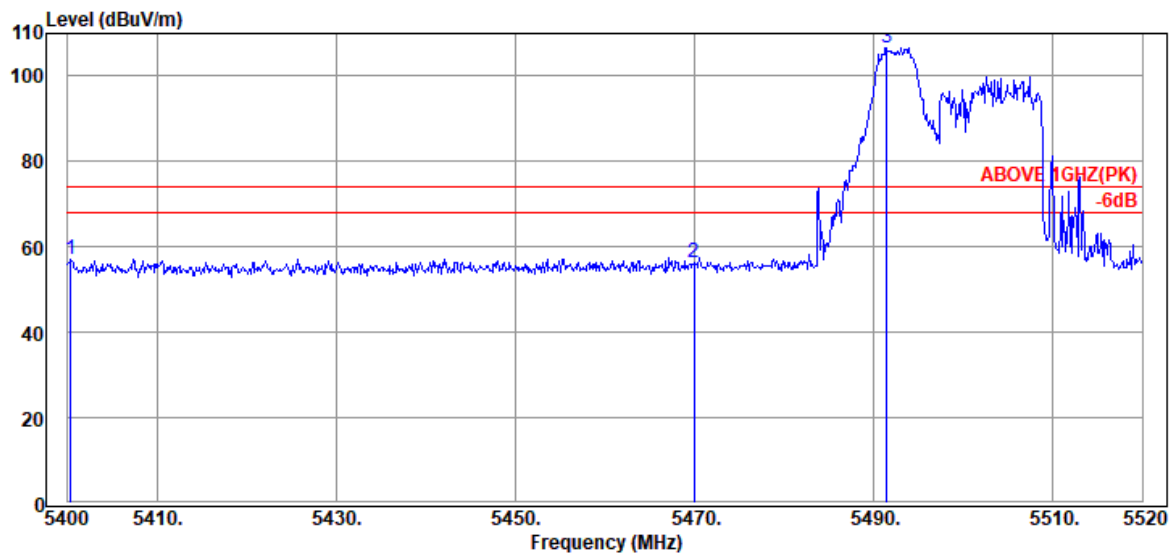

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5400.36	34.50	8.87	13.86	57.23	74.00	16.77	Peak
5469.96	34.50	8.91	13.08	56.49	74.00	17.51	Peak
@ 5491.44	34.50	8.92	63.23	106.65	---	---	Peak

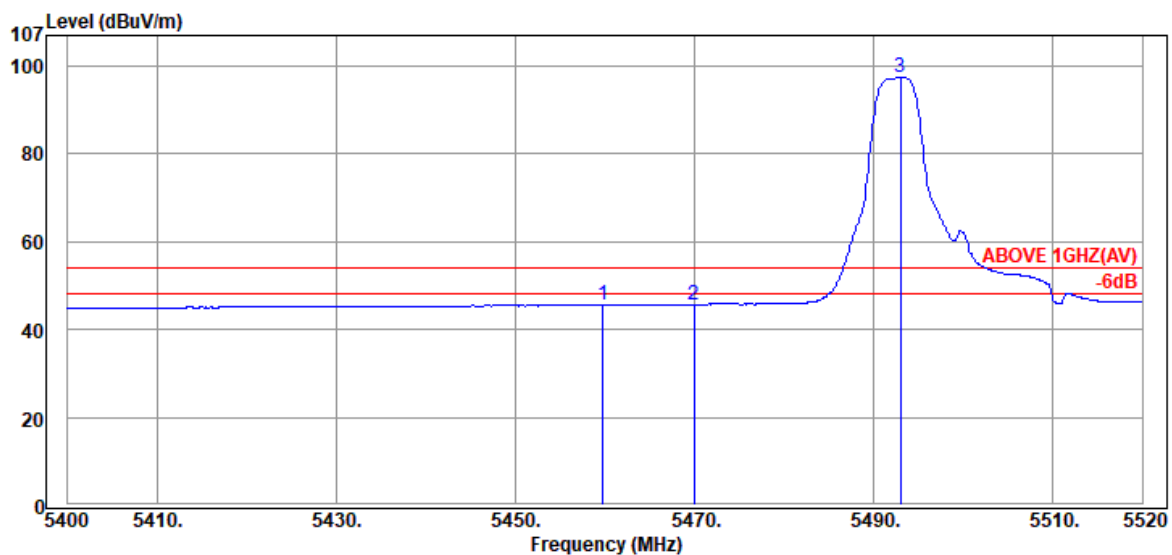

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.76	34.50	8.90	2.17	45.57	54.00	8.43	Average
5469.96	34.50	8.91	2.29	45.70	54.00	8.30	Average
@ 5493.00	34.50	8.92	53.90	97.32	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section..

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	106/53	Frequency	TX 5500MHz

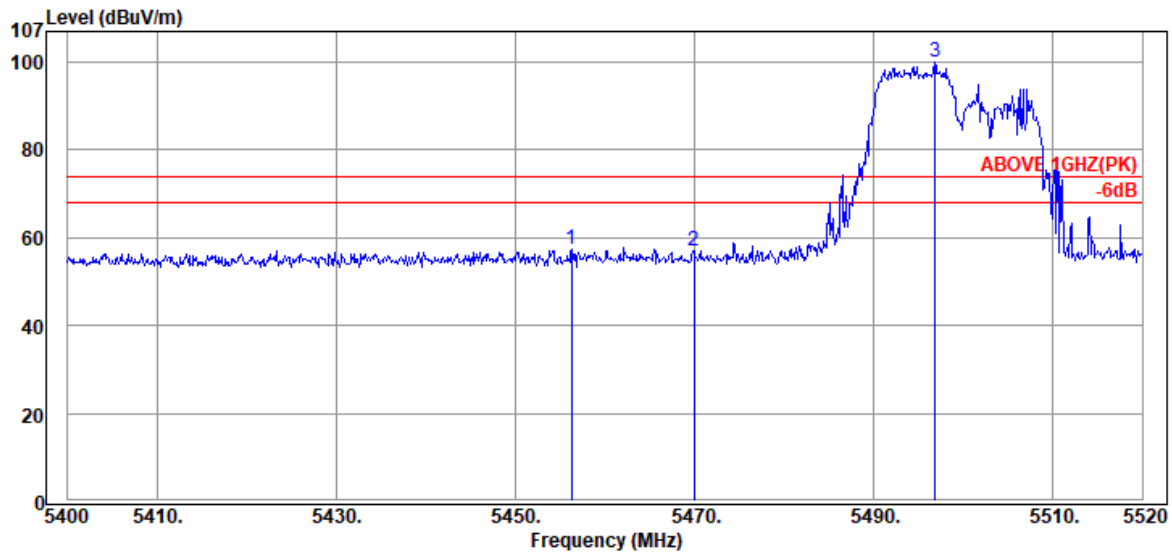

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.28	34.50	8.90	13.83	57.23	74.00	16.77	Peak
5469.96	34.50	8.91	13.66	57.07	74.00	16.93	Peak
@ 5496.84	34.50	8.92	56.44	99.86	---	---	Peak

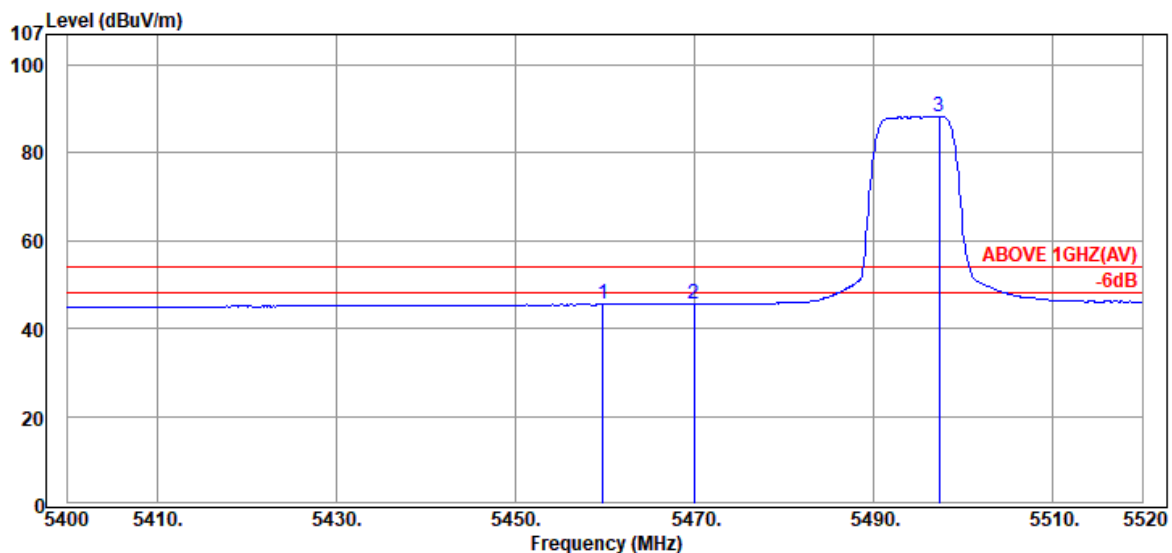

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.76	34.50	8.90	2.10	45.50	54.00	8.50	Average
5469.96	34.50	8.91	2.17	45.58	54.00	8.42	Average
@ 5497.32	34.50	8.92	44.74	88.16	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	106/53	Frequency	TX 5500MHz

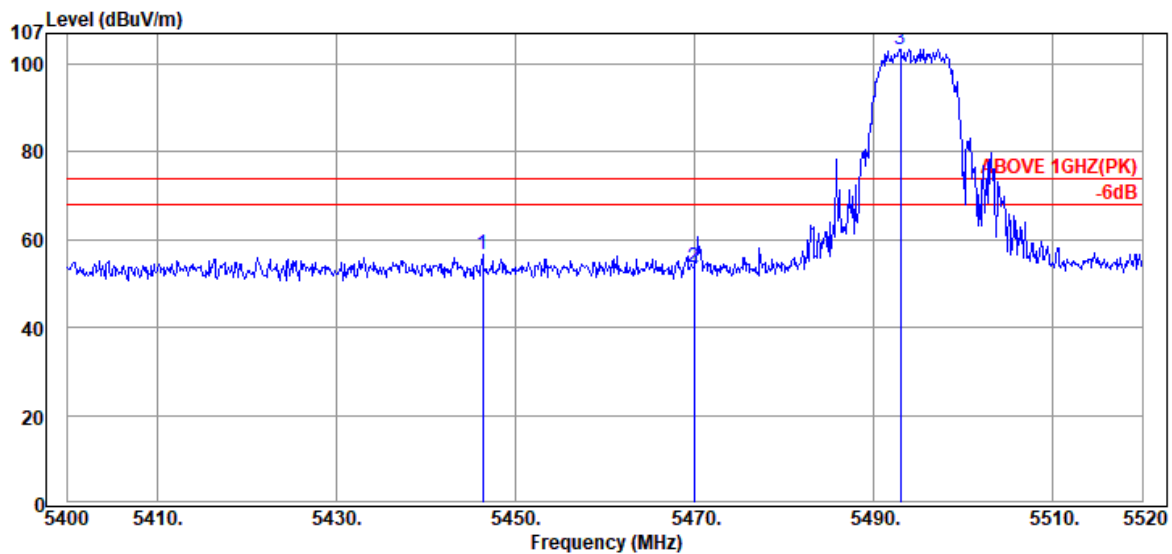

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.32	34.50	8.89	13.39	56.78	74.00	17.22	Peak
5469.96	34.50	8.91	10.17	53.58	74.00	20.42	Peak
@ 5493.00	34.50	8.92	60.06	103.48	---	---	Peak

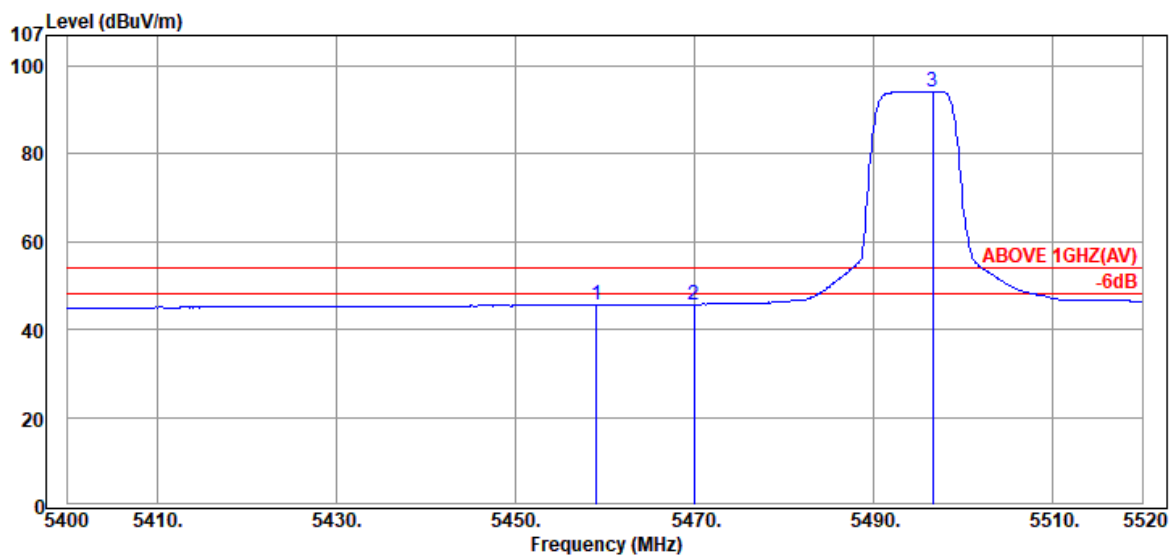

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.04	34.50	8.90	2.16	45.56	54.00	8.44	Average
5469.96	34.50	8.91	2.30	45.71	54.00	8.29	Average
@ 5496.60	34.50	8.92	50.76	94.18	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	26/8	Frequency	TX 5700MHz

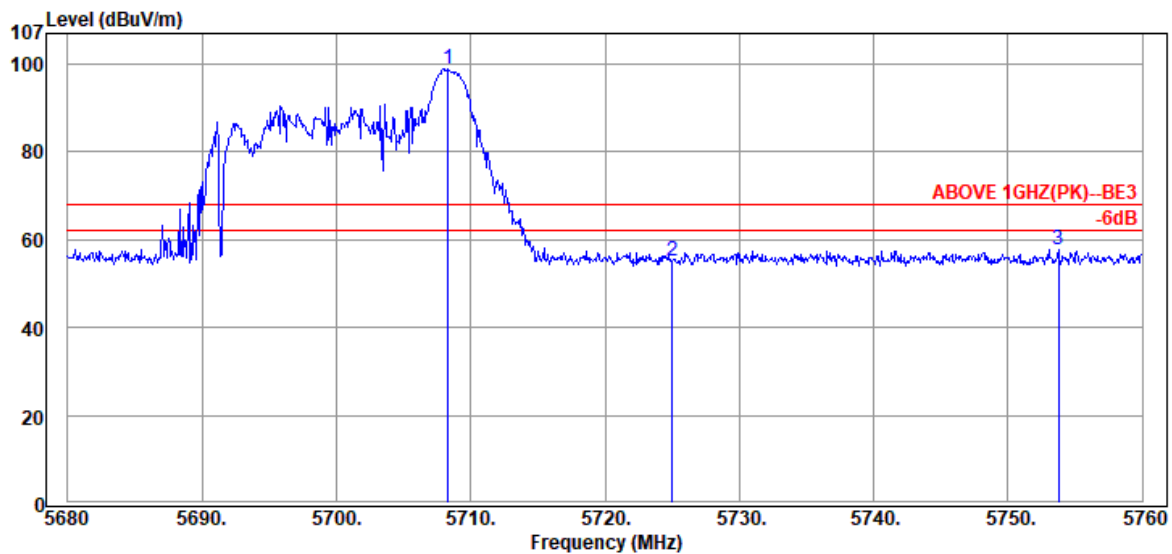

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.32	34.40	9.03	55.61	99.04	---	---	Peak
	5725.04	34.40	9.04	11.56	55.00	68.20	13.20	Peak
	5753.76	34.38	9.06	14.44	57.88	68.20	10.32	Peak

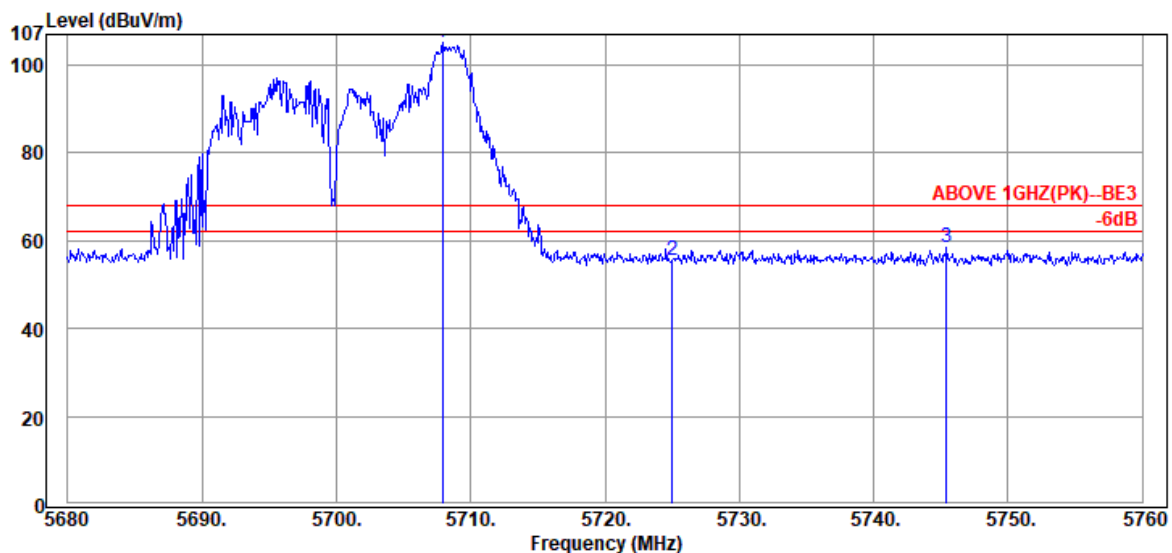

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.92	34.40	9.03	61.64	105.07	---	---	Peak
	5725.04	34.40	9.04	12.09	55.53	68.20	12.67	Peak
	5745.44	34.40	9.05	14.89	58.34	68.20	9.86	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	52/40	Frequency	TX 5700MHz

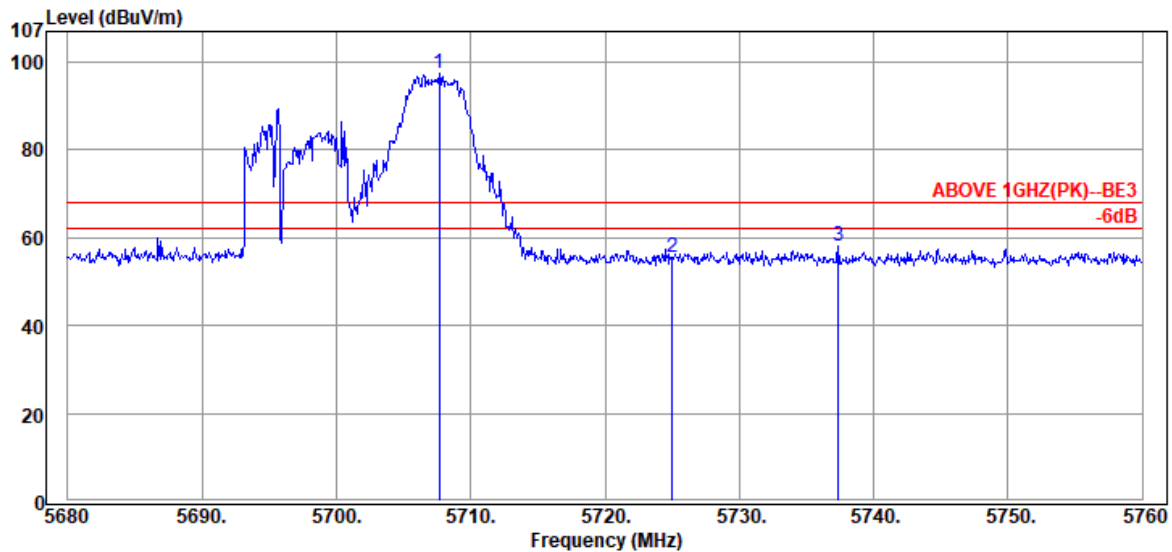

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.68	34.40	9.03	53.90	97.33	---	---	Peak
5725.04	34.40	9.04	12.07	55.51	68.20	12.69	Peak
5737.36	34.40	9.05	14.78	58.23	68.20	9.97	Peak

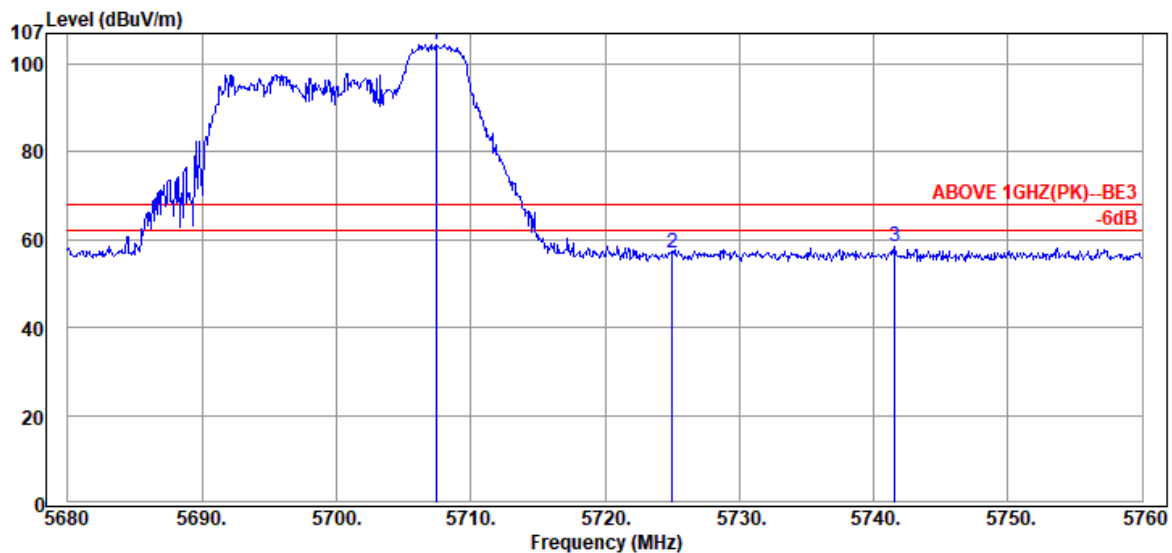

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.44	34.40	9.03	61.07	104.50	---	---	Peak
5725.04	34.40	9.04	13.53	56.97	68.20	11.23	Peak
5741.60	34.40	9.05	14.90	58.35	68.20	9.85	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
RU Configuration	106/54	Frequency	TX 5700MHz

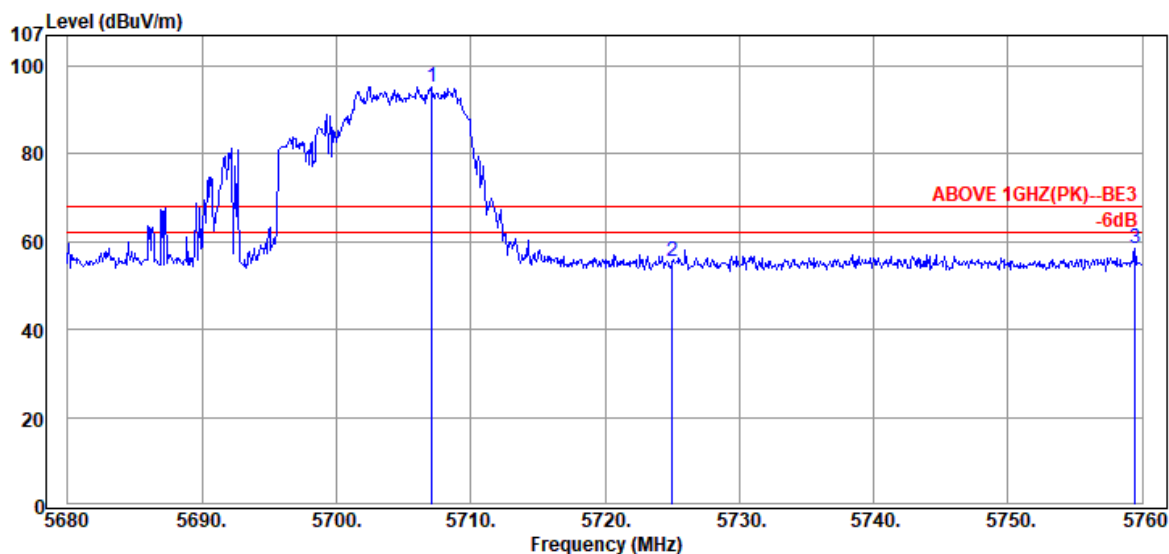

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.12	34.40	9.03	51.98	95.41	---	---	Peak
	5725.04	34.40	9.04	12.23	55.67	68.20	12.53	Peak
	5759.44	34.36	9.06	14.96	58.38	68.20	9.82	Peak

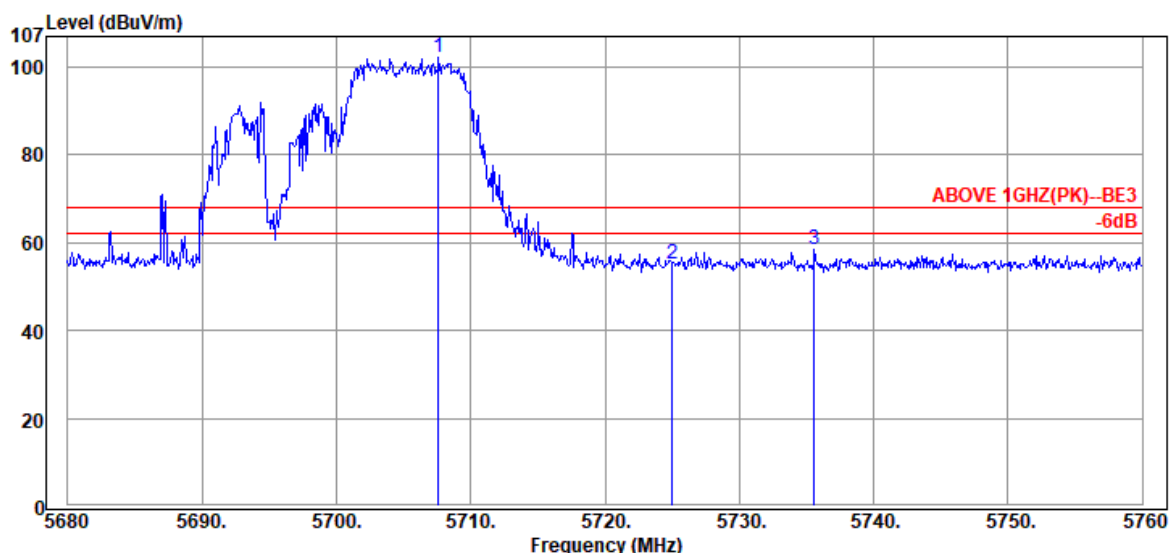

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.60	34.40	9.03	58.74	102.17	---	---	Peak
	5725.04	34.40	9.04	11.73	55.17	68.20	13.03	Peak
	5735.60	34.40	9.05	15.13	58.58	68.20	9.62	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

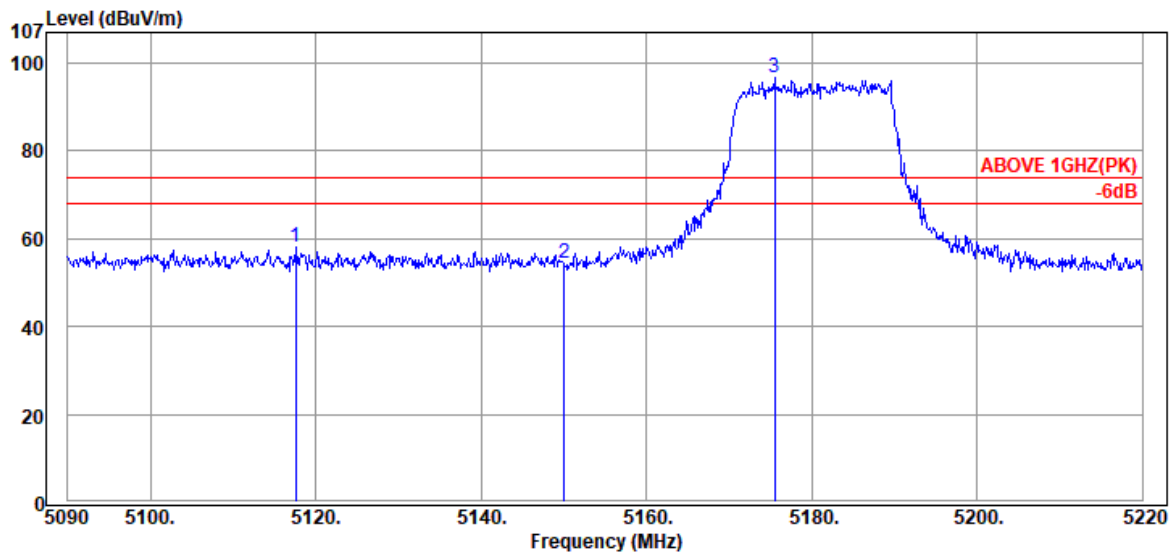

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.56	33.84	8.71	15.54	58.09	74.00	15.91	Peak
5150.06	33.90	8.73	11.85	54.48	74.00	19.52	Peak
@ 5175.54	34.00	8.74	54.08	96.82	---	---	Peak

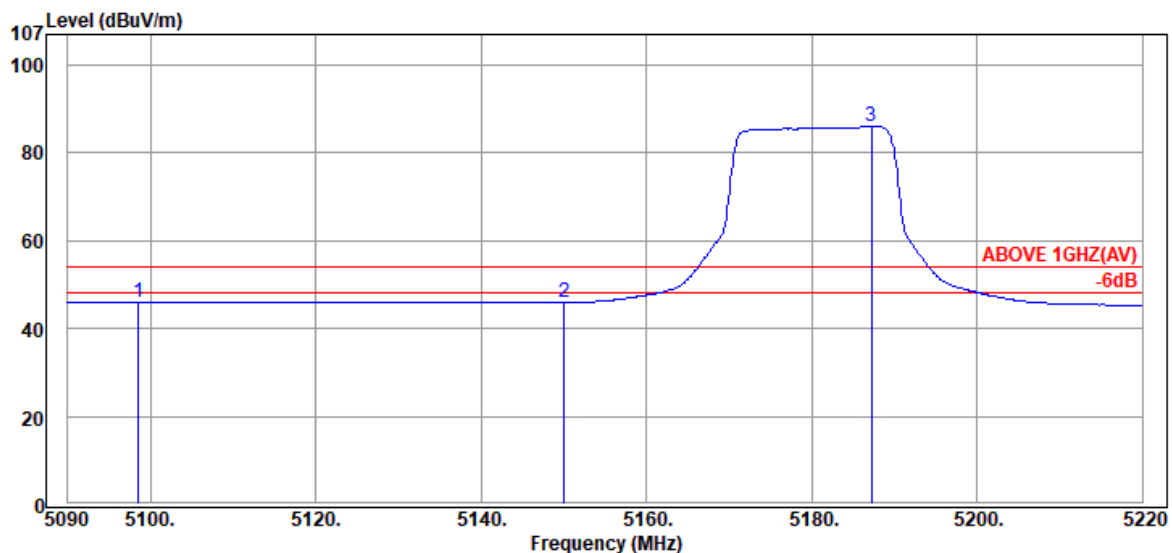

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5098.58	33.80	8.70	3.60	46.10	54.00	7.90	Average
5150.06	33.90	8.73	3.31	45.94	54.00	8.06	Average
@ 5187.24	34.05	8.75	43.17	85.97	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

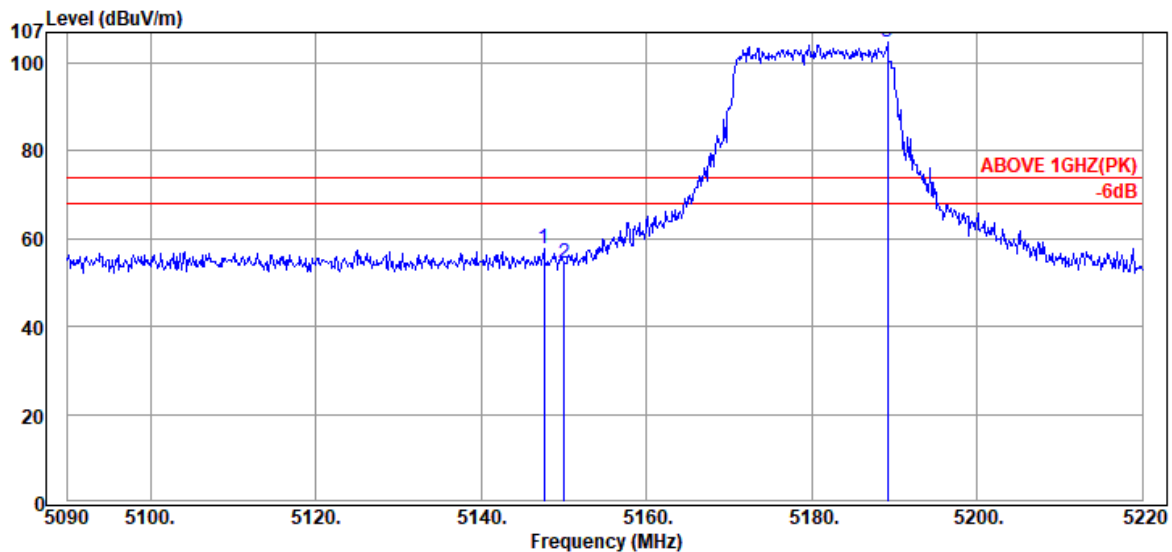

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.59	33.90	8.73	15.25	57.88	74.00	16.12	Peak
5150.06	33.90	8.73	11.72	54.35	74.00	19.65	Peak
@ 5189.19	34.06	8.75	61.86	104.67	---	---	Peak

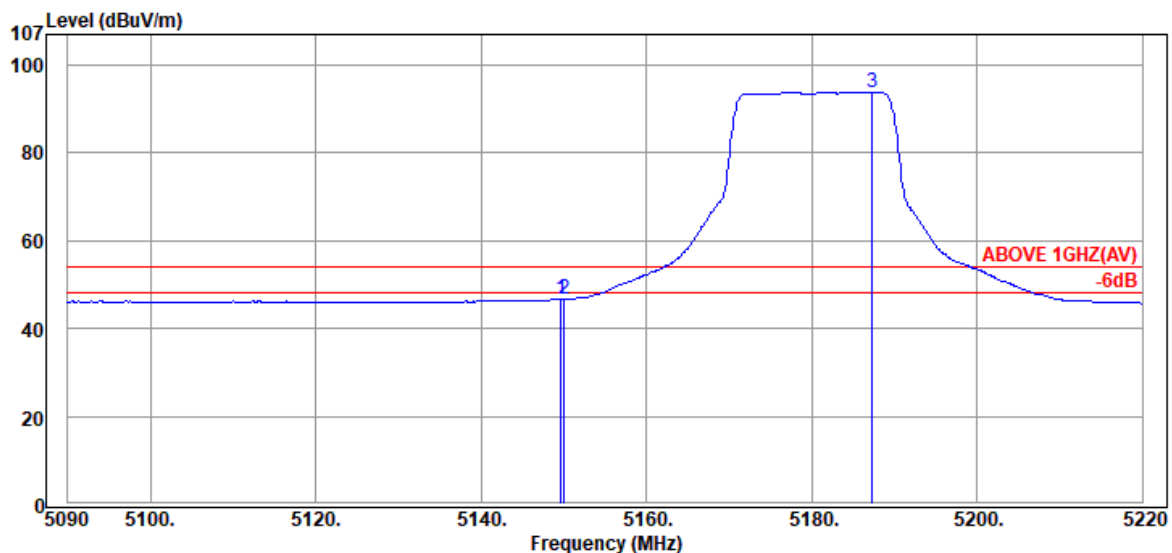

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	4.09	46.72	54.00	7.28	Average
5150.06	33.90	8.73	4.14	46.77	54.00	7.23	Average
@ 5187.37	34.05	8.75	51.09	93.89	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
RU Configuration	242/62	Frequency	TX 5310MHz

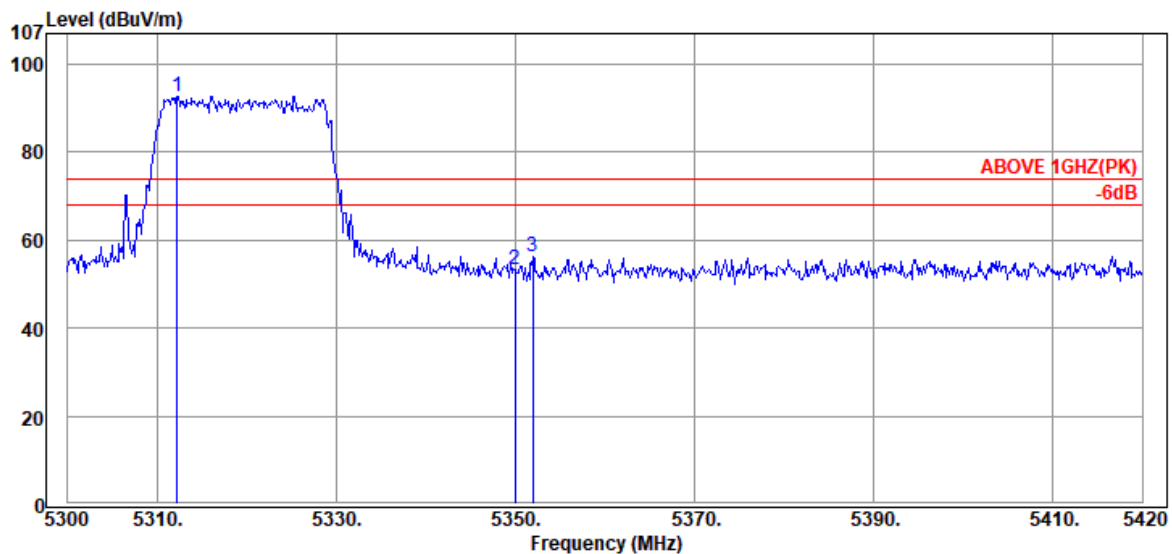

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.20	34.50	8.82	49.46	92.78	---	---	Peak
5350.00	34.50	8.84	9.80	53.14	74.00	20.86	Peak
5351.96	34.50	8.84	12.87	56.21	74.00	17.79	Peak

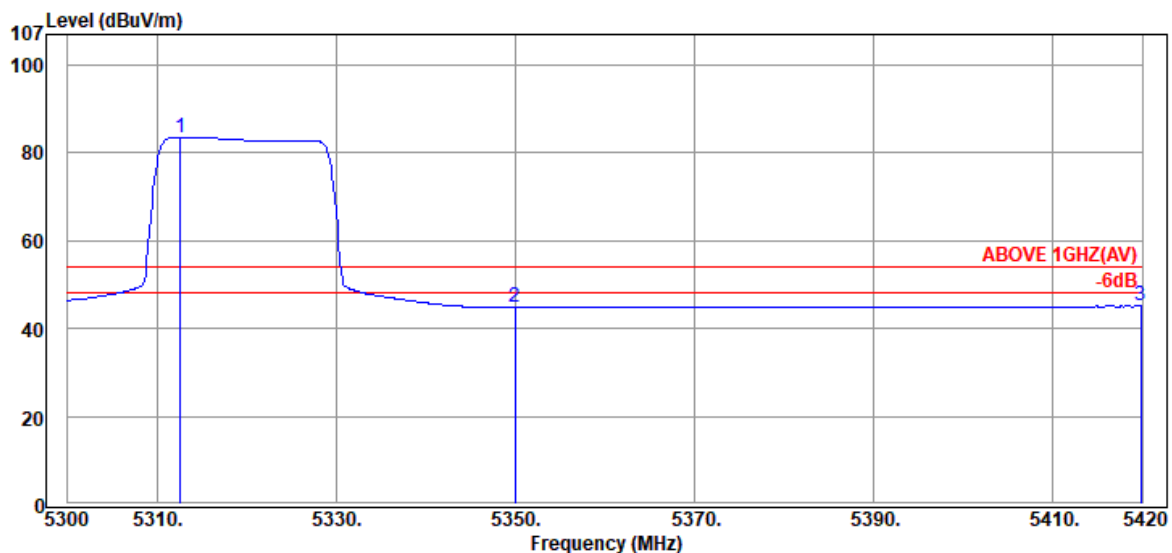

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.62	34.50	8.82	40.24	83.56	---	---	Average
5350.00	34.50	8.84	1.45	44.79	54.00	9.21	Average
5419.86	34.50	8.88	1.70	45.08	54.00	8.92	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2A
RU Configuration	242/62	Frequency	TX 5310MHz

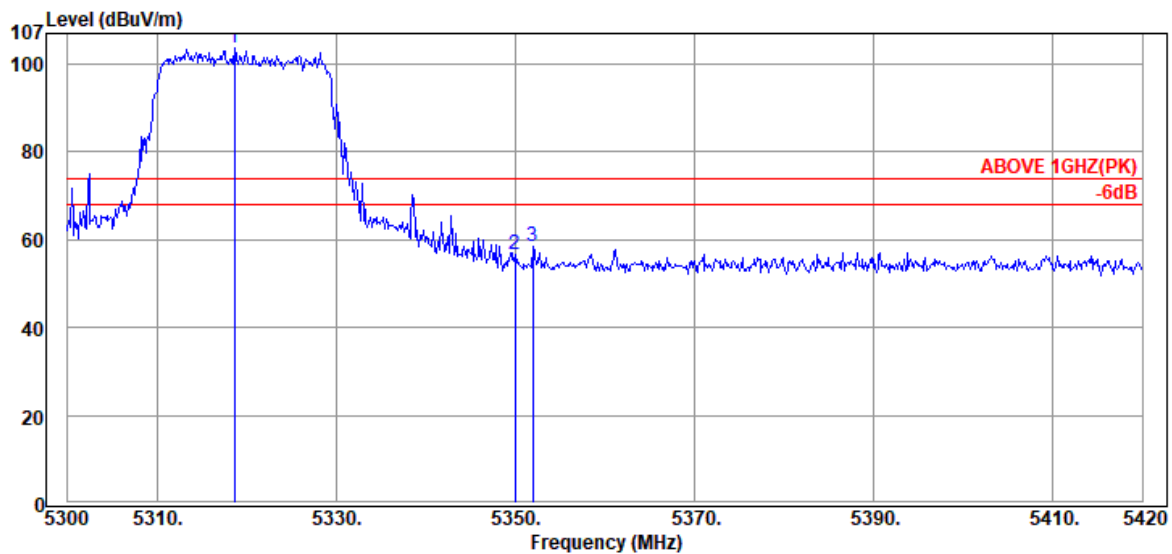

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.64	34.50	8.82	60.33	103.65	---	---	Peak
	5350.00	34.50	8.84	13.22	56.56	74.00	17.44	Peak
	5351.96	34.50	8.84	14.97	58.31	74.00	15.69	Peak

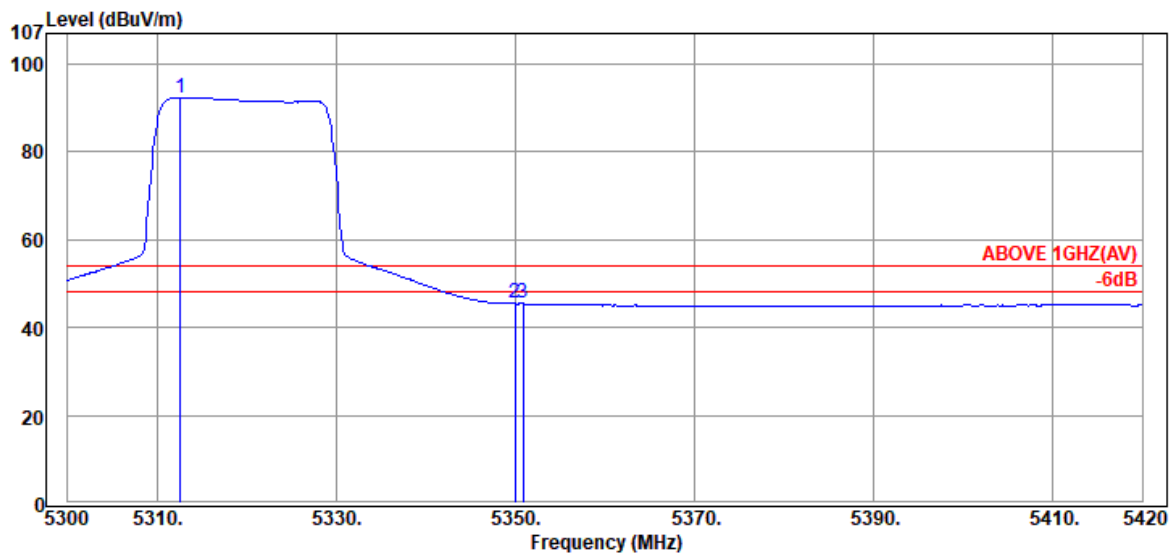

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5312.62	34.50	8.82	49.03	92.35	---	---	Average
	5350.00	34.50	8.84	2.09	45.43	54.00	8.57	Average
	5350.84	34.50	8.84	2.13	45.47	54.00	8.53	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
RU Configuration	242/61	Frequency	TX 5510MHz

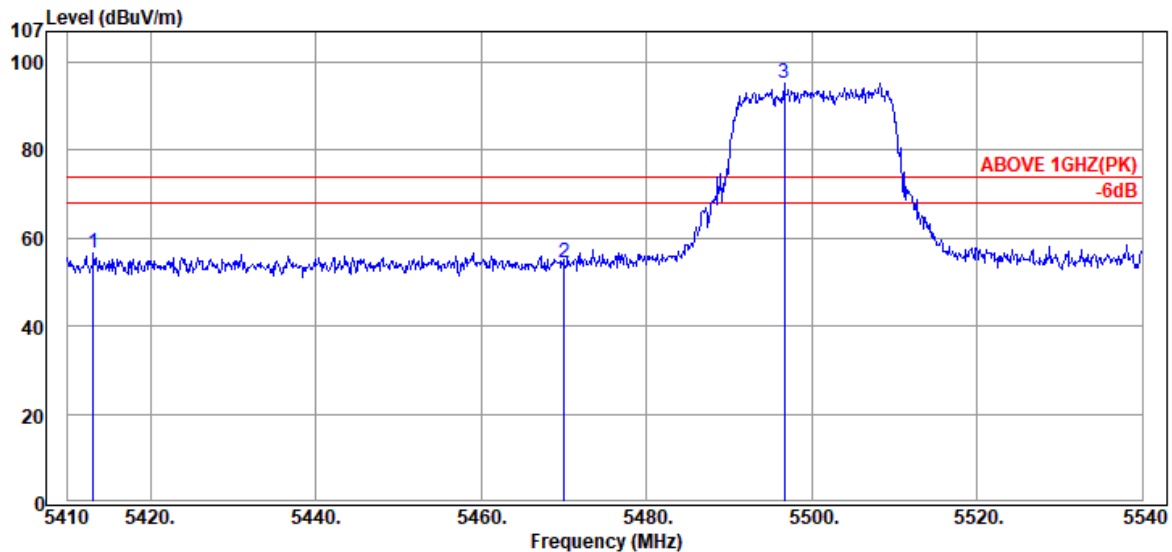

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.12	34.50	8.88	13.14	56.52	74.00	17.48	Peak
5470.06	34.50	8.91	11.02	54.43	74.00	19.57	Peak
@ 5496.71	34.50	8.92	51.84	95.26	---	---	Peak

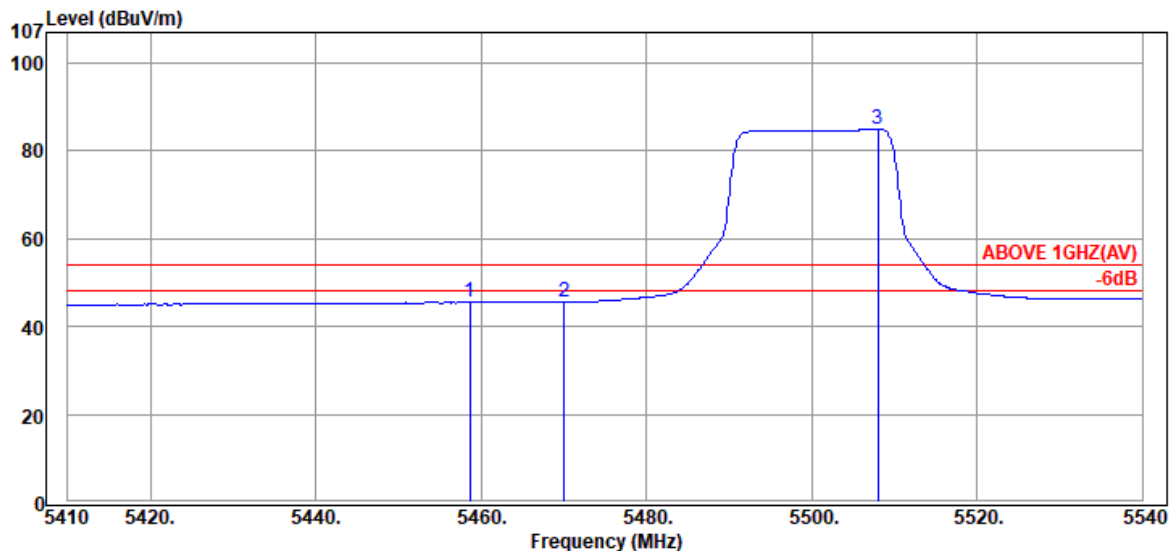

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.62	34.50	8.90	2.07	45.47	54.00	8.53	Average
5470.06	34.50	8.91	2.22	45.63	54.00	8.37	Average
@ 5508.02	34.52	8.93	41.59	85.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
RU Configuration	242/61	Frequency	TX 5510MHz

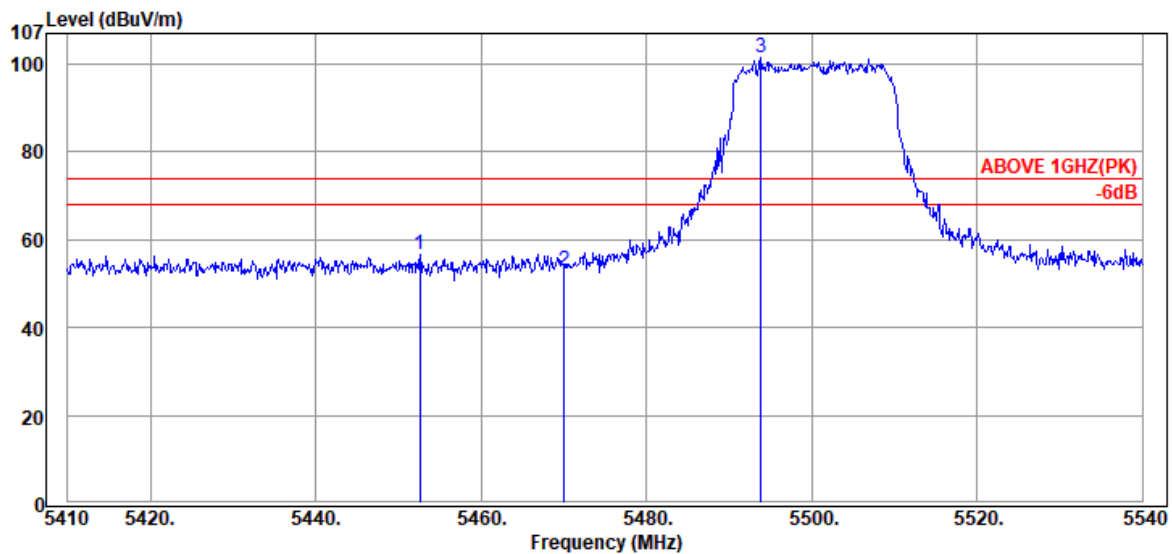

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.64	34.50	8.90	13.19	56.59	74.00	17.41	Peak
5470.06	34.50	8.91	9.54	52.95	74.00	21.05	Peak
@ 5493.85	34.50	8.92	58.07	101.49	---	---	Peak

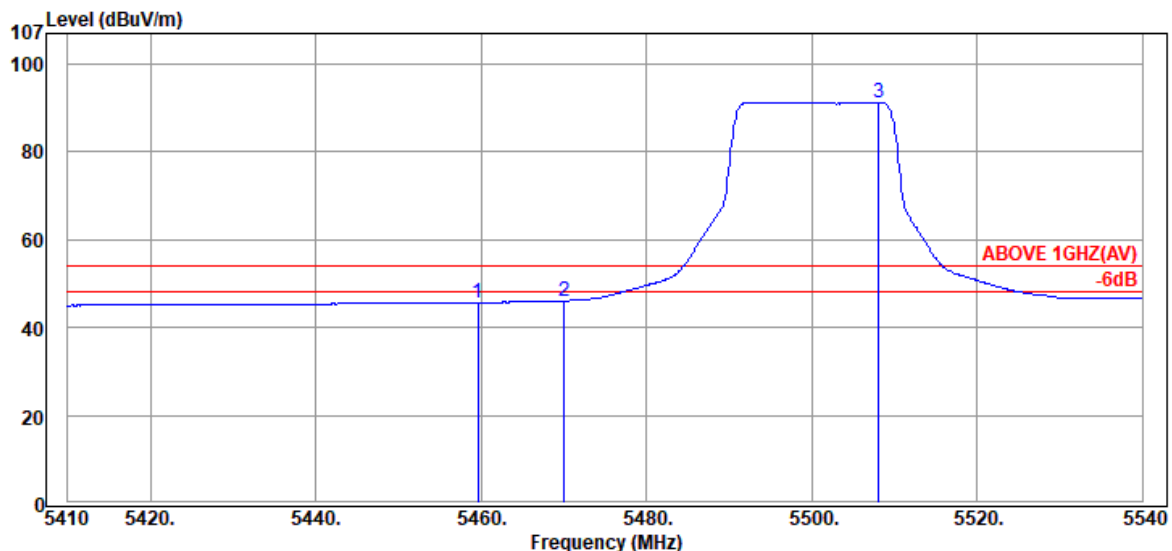

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.66	34.50	8.90	2.30	45.70	54.00	8.30	Average
5470.06	34.50	8.91	2.72	46.13	54.00	7.87	Average
@ 5508.15	34.52	8.93	47.91	91.36	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
RU Configuration	242/62	Frequency	TX 5670MHz

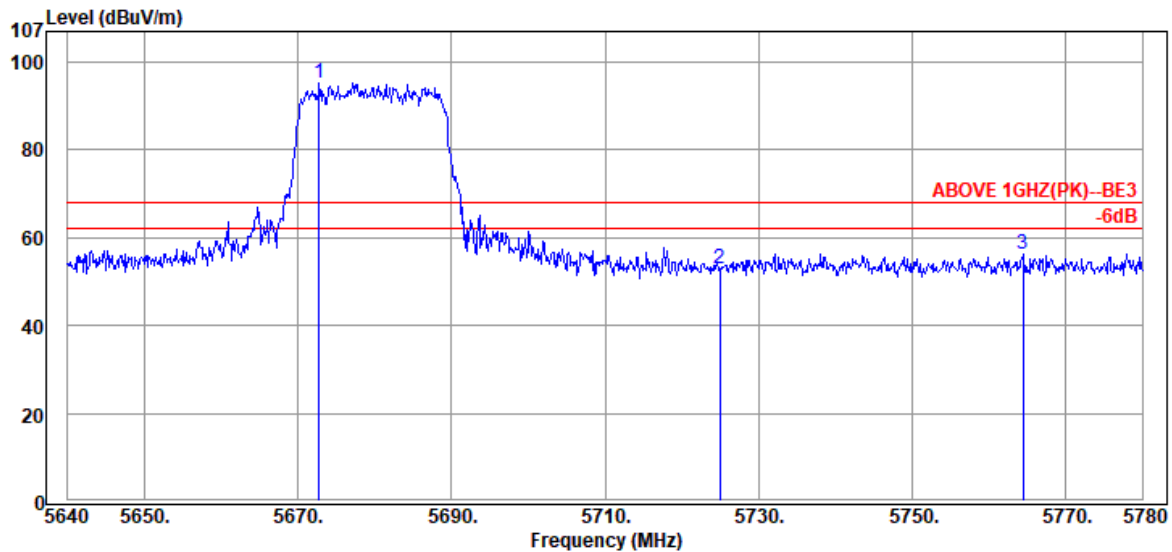

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5672.76	34.51	9.01	51.88	95.40	---	---	Peak
	5724.98	34.40	9.04	9.67	53.11	68.20	15.09	Peak
	5764.46	34.34	9.06	12.86	56.26	68.20	11.94	Peak

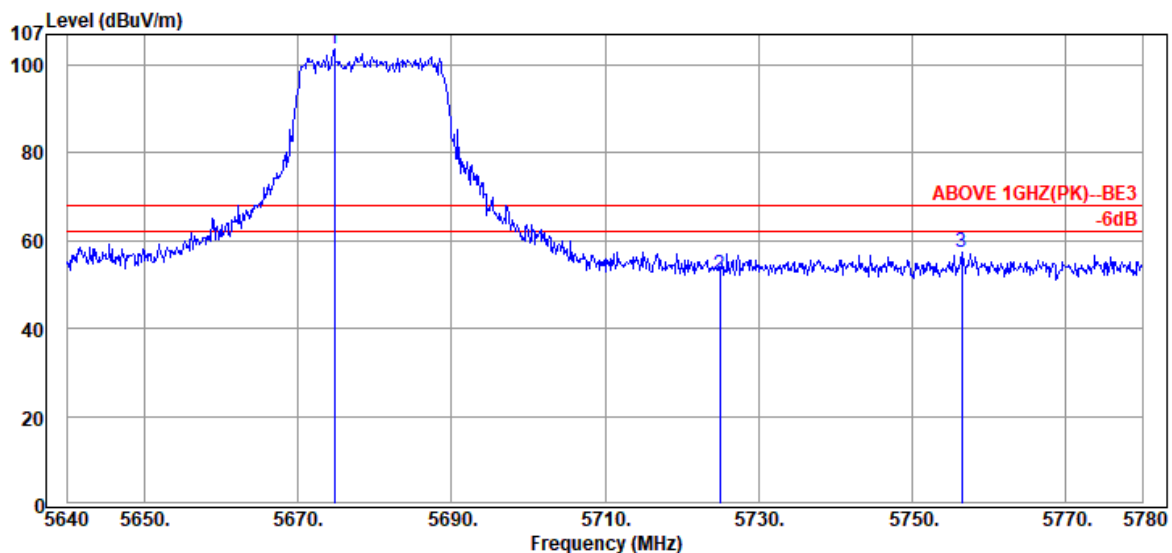

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5674.72	34.50	9.01	60.07	103.58	---	---	Peak
	5724.98	34.40	9.04	8.87	52.31	68.20	15.89	Peak
	5756.48	34.37	9.06	13.80	57.23	68.20	10.97	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

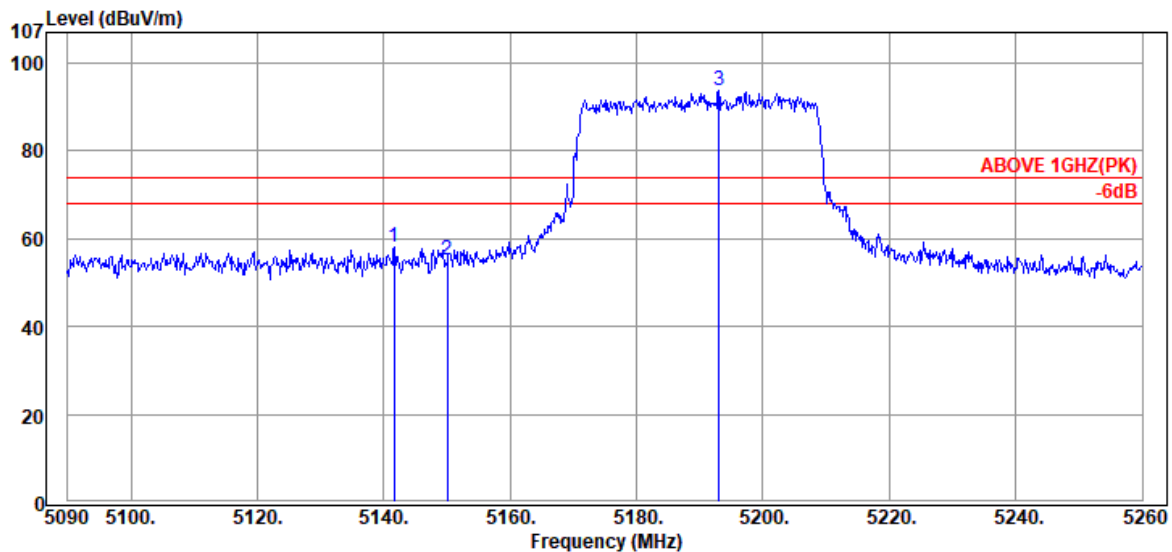

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.68	33.88	8.72	15.34	57.94	74.00	16.06	Peak
5150.01	33.90	8.73	12.50	55.13	74.00	18.87	Peak
@ 5193.02	34.07	8.75	50.79	93.61	---	---	Peak

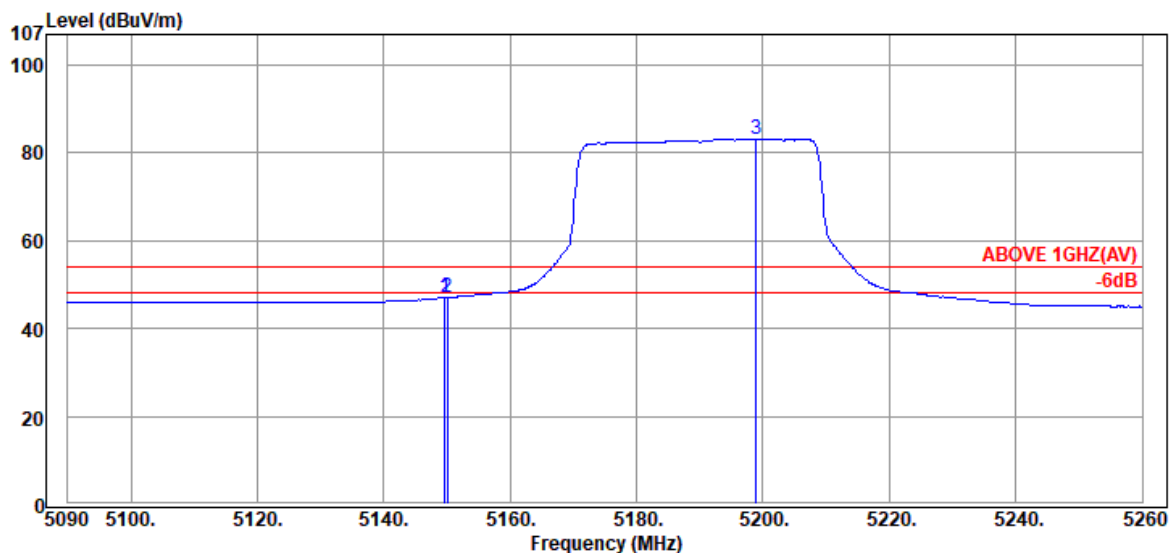

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	4.35	46.98	54.00	7.02	Average
5150.01	33.90	8.73	4.41	47.04	54.00	6.96	Average
@ 5198.97	34.10	8.76	40.24	83.10	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

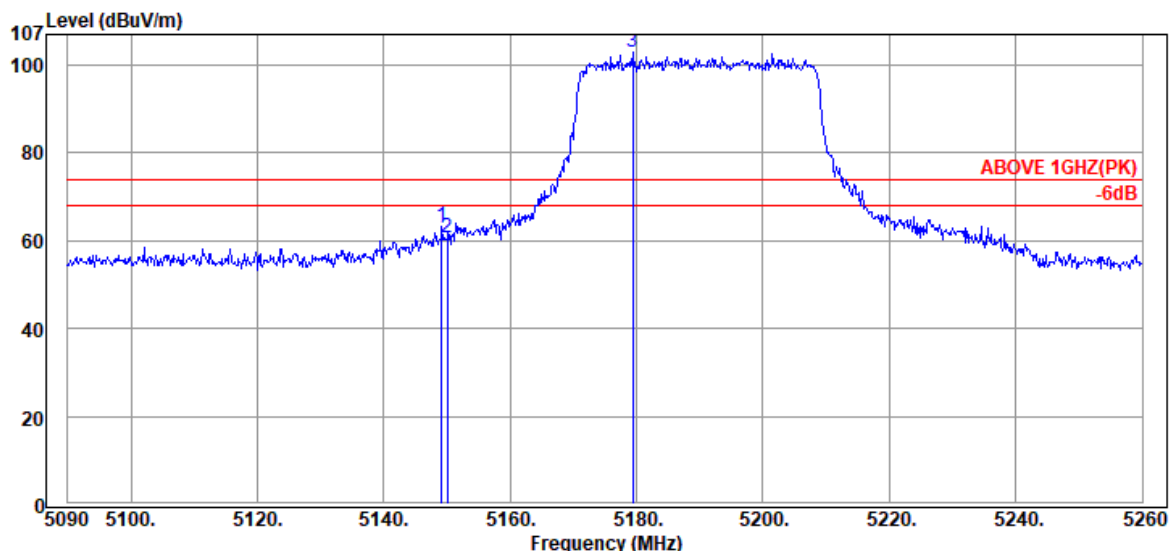

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.16	33.90	8.73	20.78	63.41	74.00	10.59	Peak
5150.01	33.90	8.73	17.99	60.62	74.00	13.38	Peak
@ 5179.42	34.02	8.74	60.16	102.92	---	---	Peak

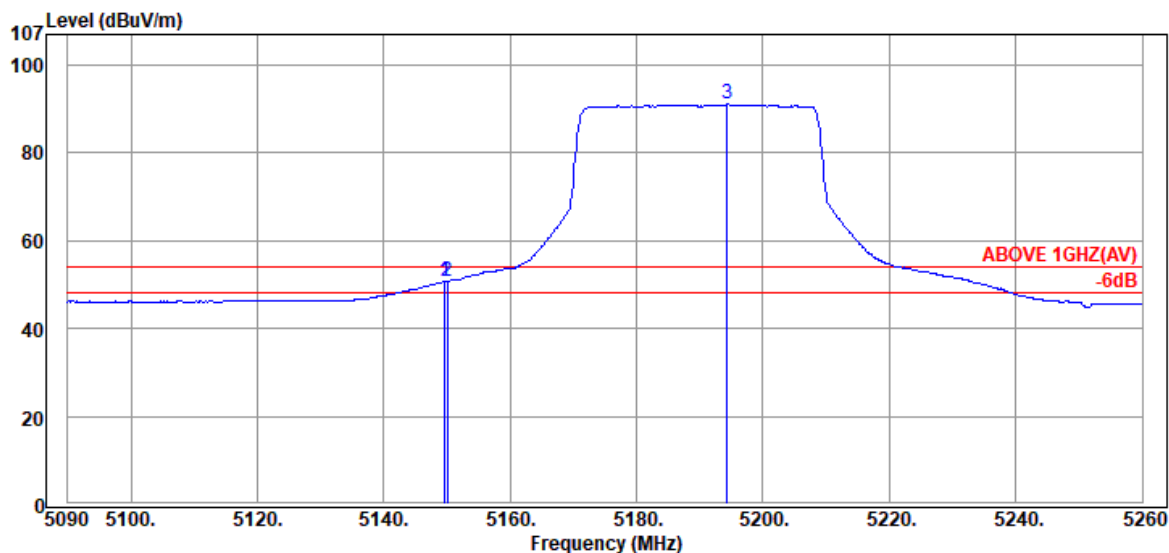

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	8.10	50.73	54.00	3.27	Average
5150.01	33.90	8.73	8.17	50.80	54.00	3.20	Average
@ 5194.38	34.08	8.75	48.21	91.04	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
RU Configuration	484/66	Frequency	TX 5290MHz

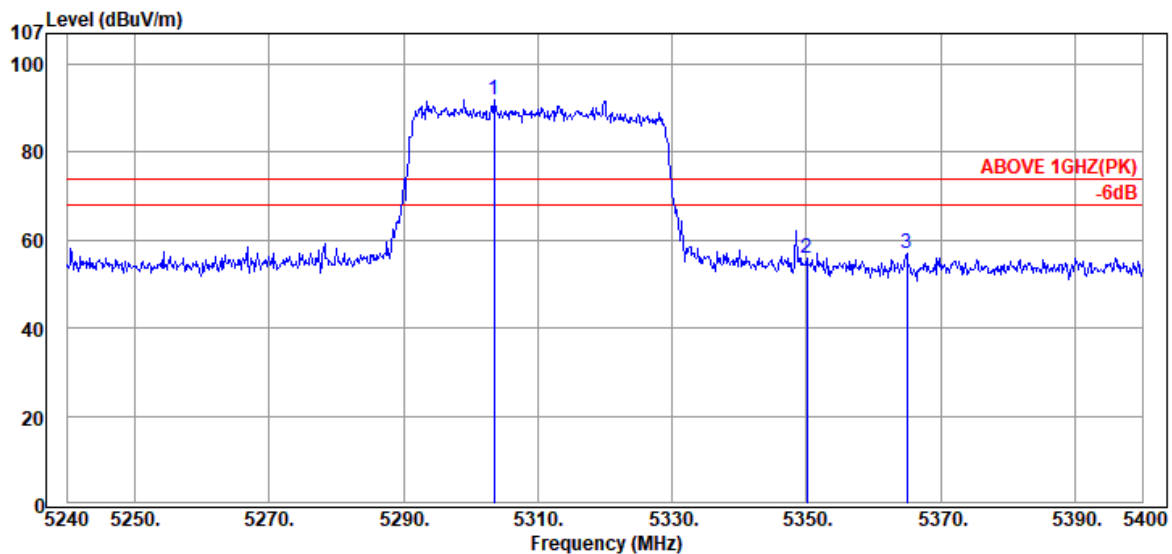

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5303.52	34.50	8.81	48.52	91.83	---	---	Peak
	5350.08	34.50	8.84	12.64	55.98	74.00	18.02	Peak
	5364.96	34.50	8.85	13.66	57.01	74.00	16.99	Peak

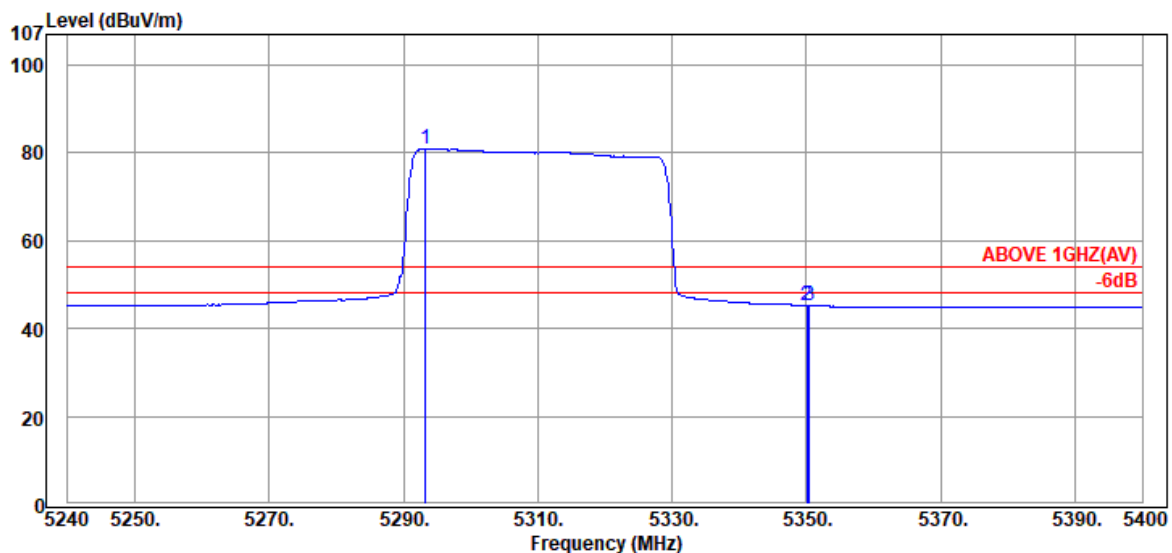

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.28	34.49	8.81	37.67	80.97	---	---	Average
	5350.08	34.50	8.84	1.88	45.22	54.00	8.78	Average
	5350.40	34.50	8.84	1.92	45.26	54.00	8.74	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2A
RU Configuration	484/66	Frequency	TX 5290MHz

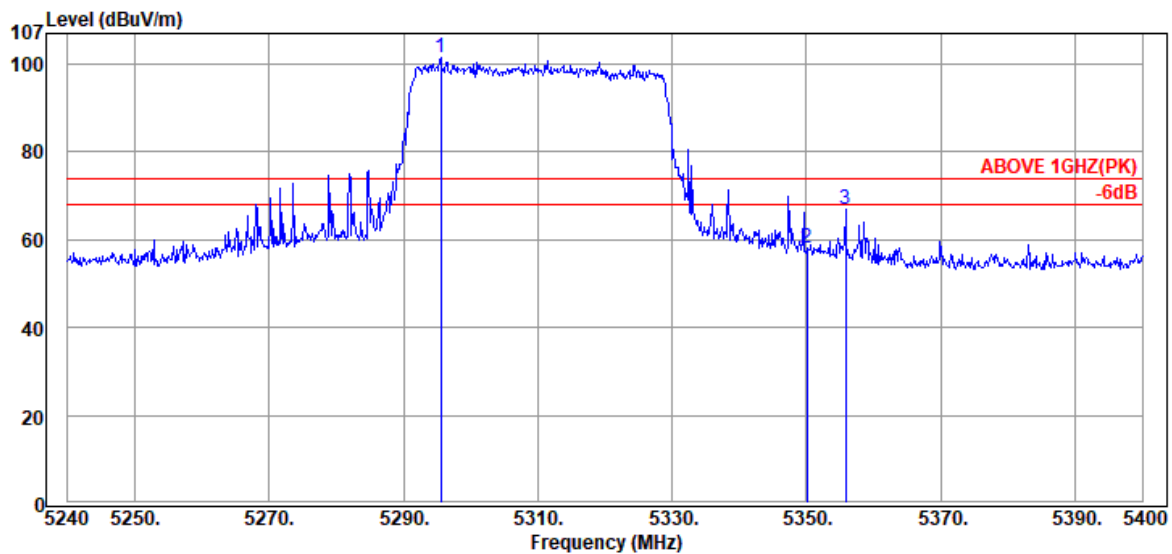

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5295.52	34.49	8.81	58.37	101.67	---	---	Peak
	5350.08	34.50	8.84	14.68	58.02	74.00	15.98	Peak
	5355.84	34.50	8.84	23.50	66.84	74.00	7.16	Peak

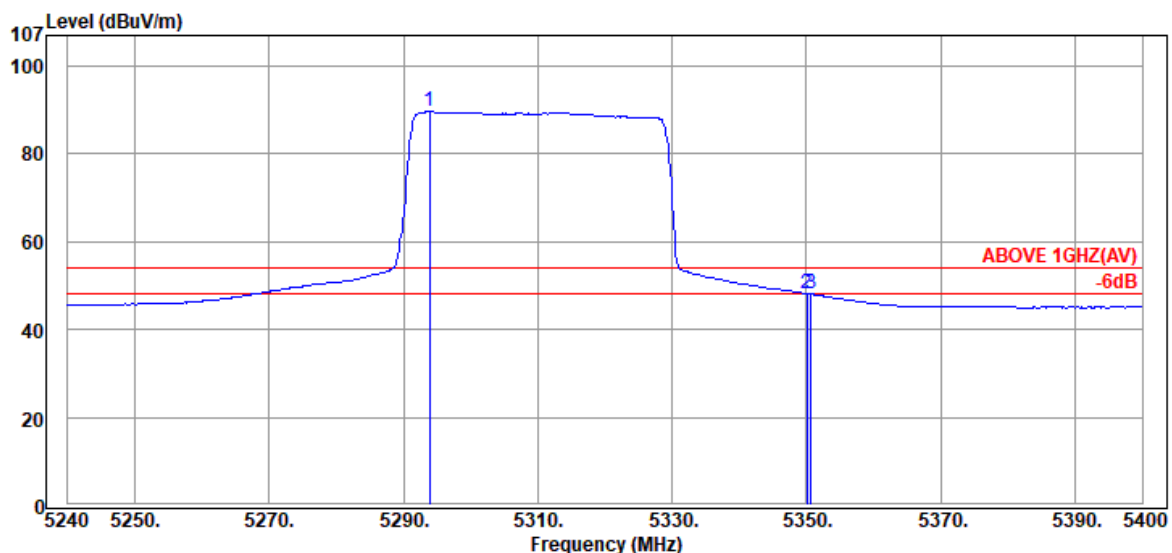

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.92	34.49	8.81	46.28	89.58	---	---	Average
	5350.08	34.50	8.84	4.88	48.22	54.00	5.78	Average
	5350.72	34.50	8.84	4.76	48.10	54.00	5.90	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
RU Configuration	484/65	Frequency	TX 5530MHz

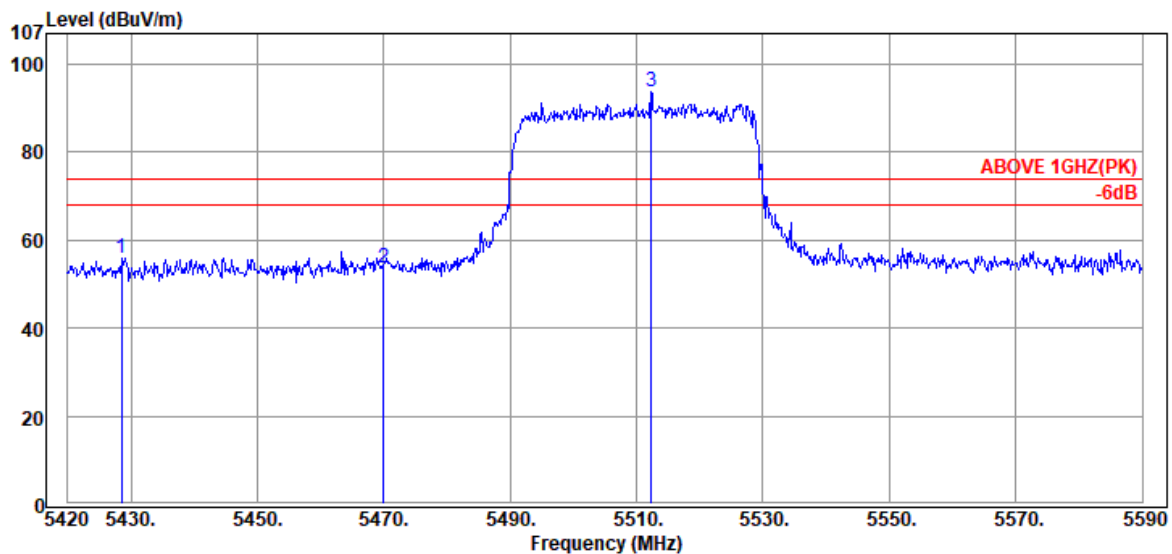

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.50	34.50	8.88	12.63	56.01	74.00	17.99	Peak
5469.98	34.50	8.91	10.44	53.85	74.00	20.15	Peak
@ 5512.31	34.52	8.93	50.37	93.82	---	---	Peak

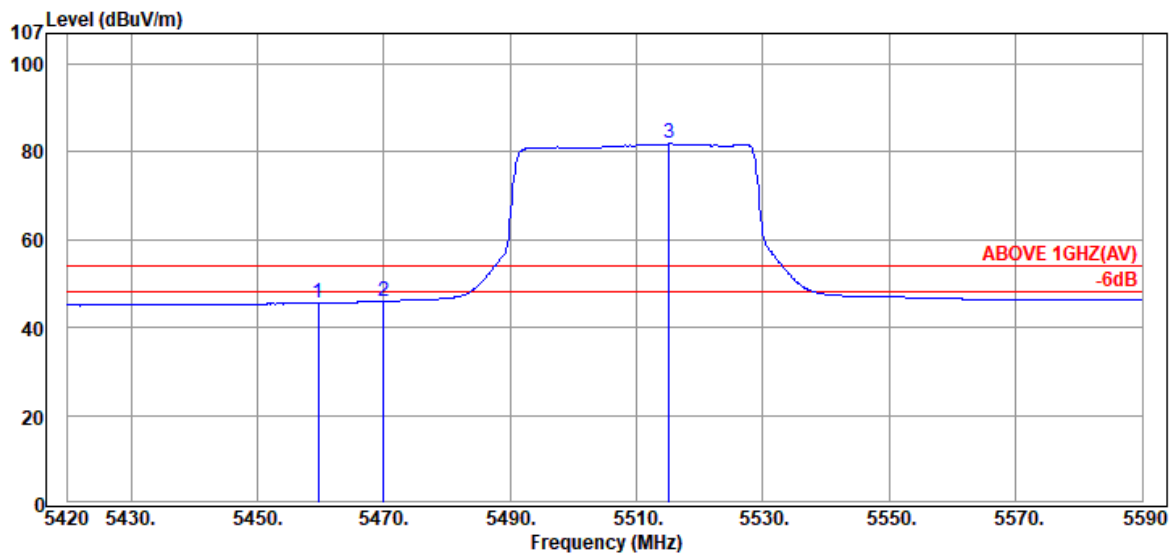

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.61	34.50	8.90	2.17	45.57	54.00	8.43	Average
5469.98	34.50	8.91	2.62	46.03	54.00	7.97	Average
@ 5515.20	34.53	8.93	38.38	81.84	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
RU Configuration	484/65	Frequency	TX 5530MHz

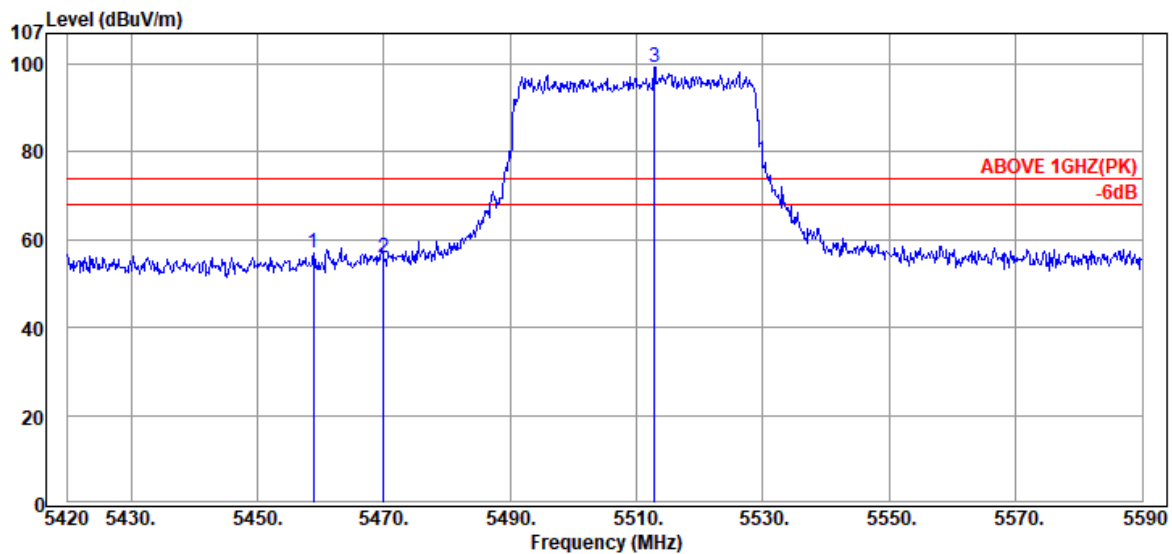

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.93	34.50	8.90	13.55	56.95	74.00	17.05	Peak
5469.98	34.50	8.91	12.52	55.93	74.00	18.07	Peak
@ 5512.82	34.53	8.93	55.66	99.12	---	---	Peak

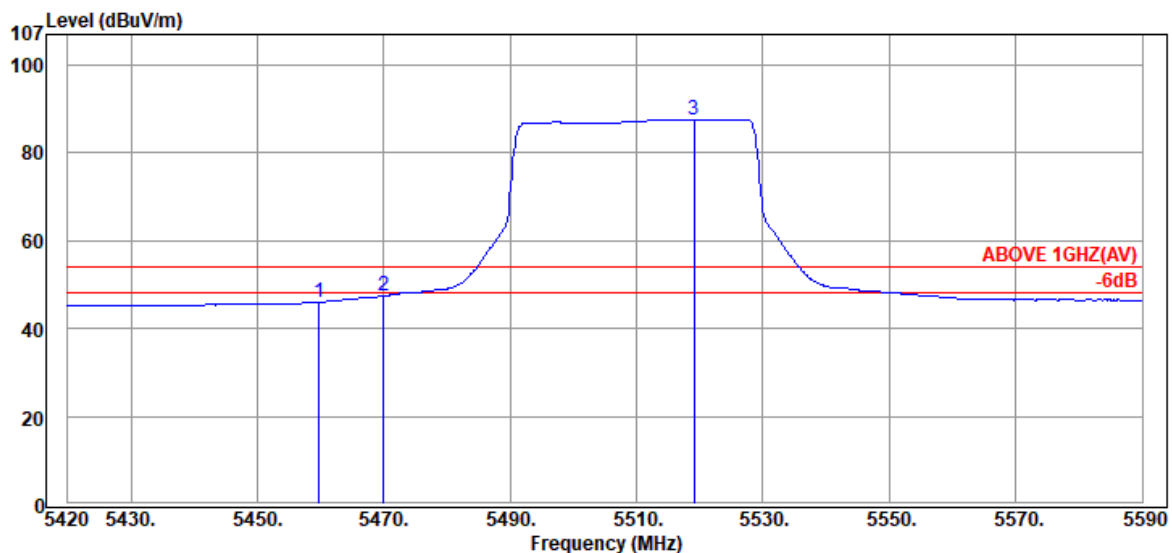

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.78	34.50	8.90	2.68	46.08	54.00	7.92	Average
5469.98	34.50	8.91	4.00	47.41	54.00	6.59	Average
@ 5519.11	34.54	8.93	44.21	87.68	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/67	Frequency	TX 5250MHz

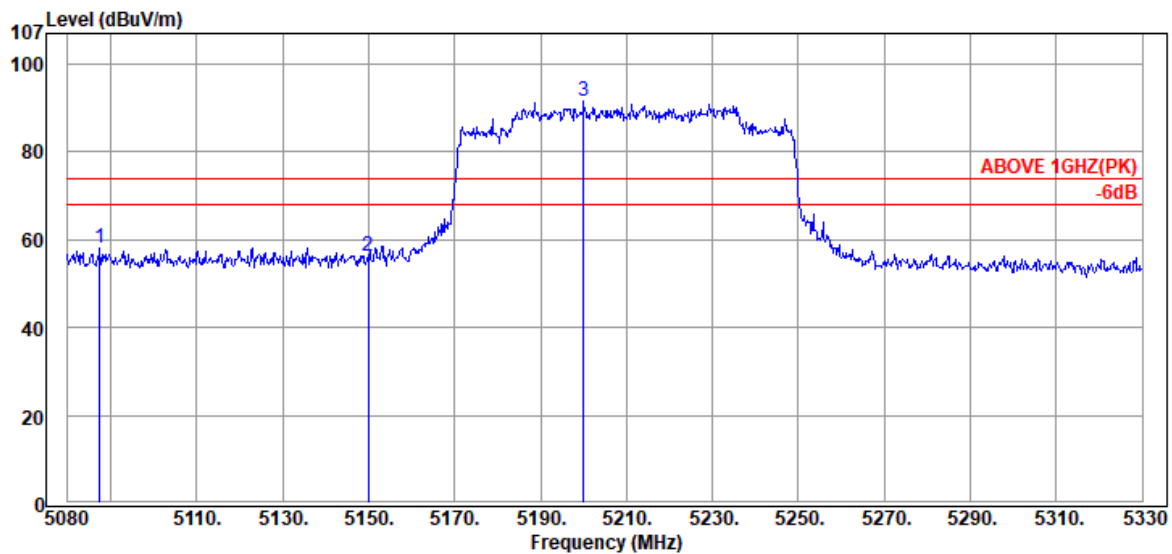

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5087.50	33.80	8.69	15.71	58.20	74.00	15.80	Peak
5150.00	33.90	8.73	13.46	56.09	74.00	17.91	Peak
@ 5200.00	34.10	8.76	48.56	91.42	---	---	Peak

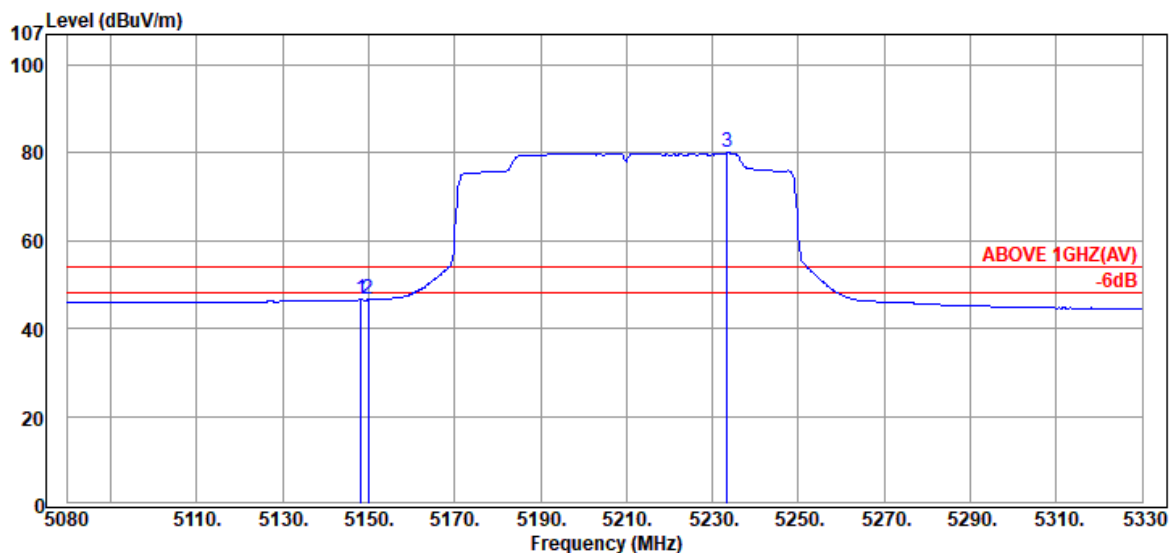

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.25	33.90	8.73	3.94	46.57	54.00	7.43	Average
5150.00	33.90	8.73	3.94	46.57	54.00	7.43	Average
@ 5233.50	34.30	8.78	36.93	80.01	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/67	Frequency	TX 5250MHz

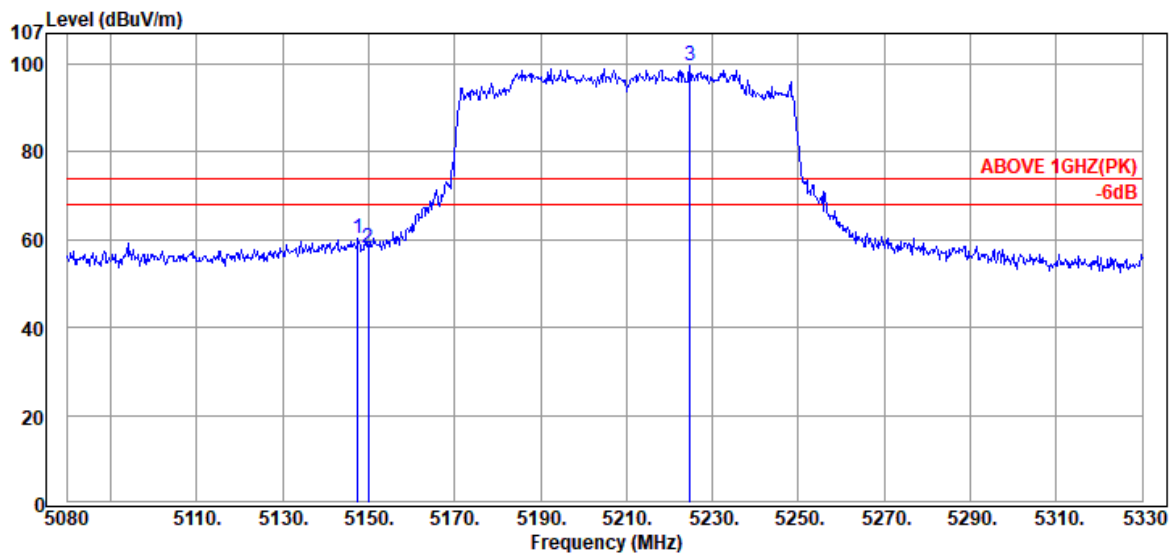

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.50	33.90	8.73	17.77	60.40	74.00	13.60	Peak
5150.00	33.90	8.73	15.47	58.10	74.00	15.90	Peak
@ 5224.75	34.25	8.77	56.67	99.69	---	---	Peak

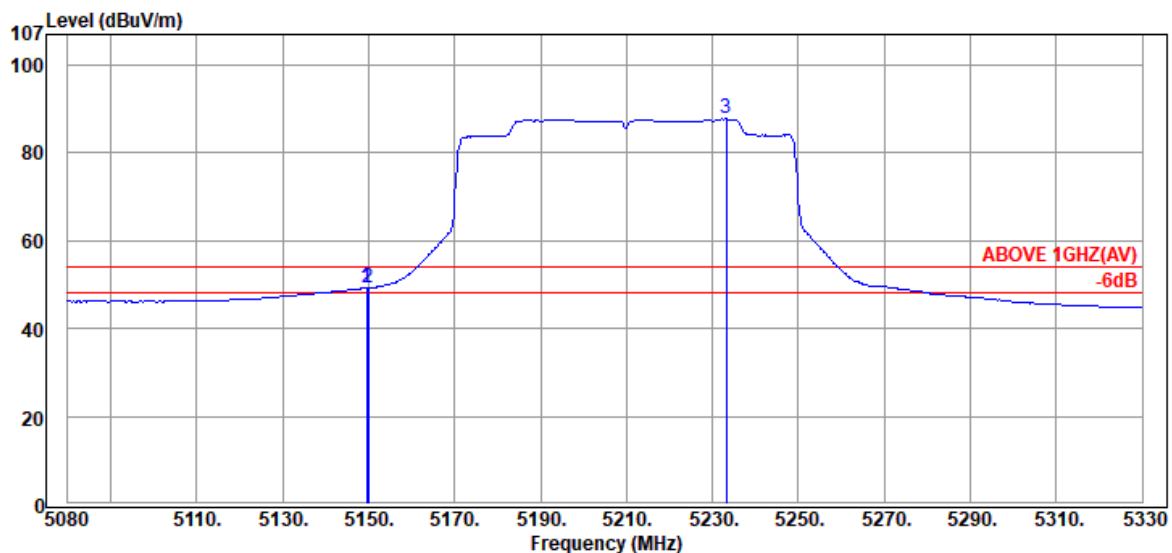

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	33.90	8.73	6.59	49.22	54.00	4.78	Average
5150.00	33.90	8.73	6.66	49.29	54.00	4.71	Average
@ 5233.25	34.30	8.78	44.64	87.72	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

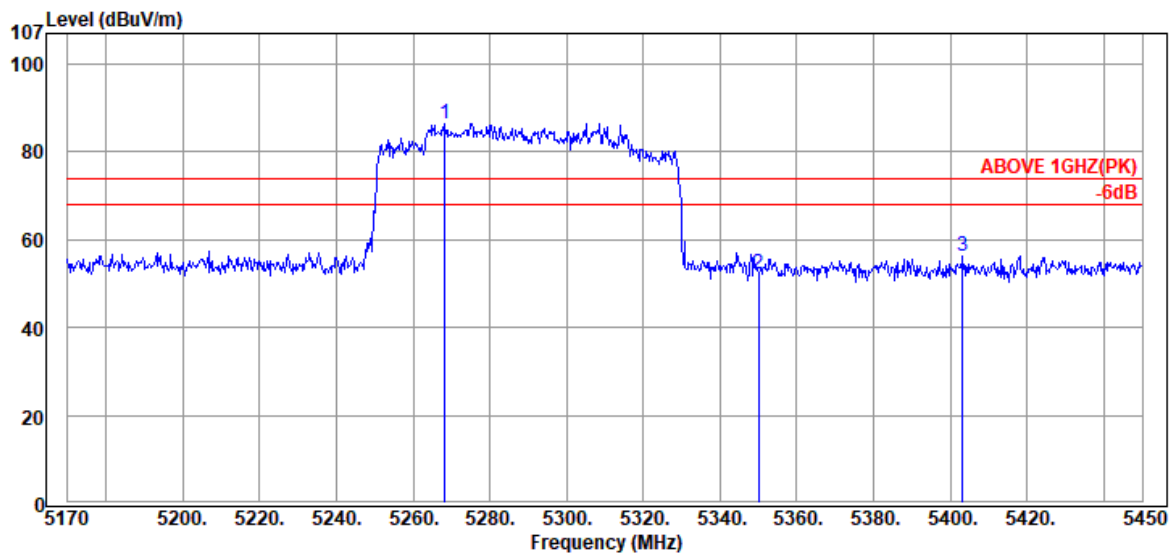

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5268.28	34.44	8.79	43.26	86.49	---	---	Peak
	5350.04	34.50	8.84	8.80	52.14	74.00	21.86	Peak
	5403.24	34.50	8.87	12.77	56.14	74.00	17.86	Peak

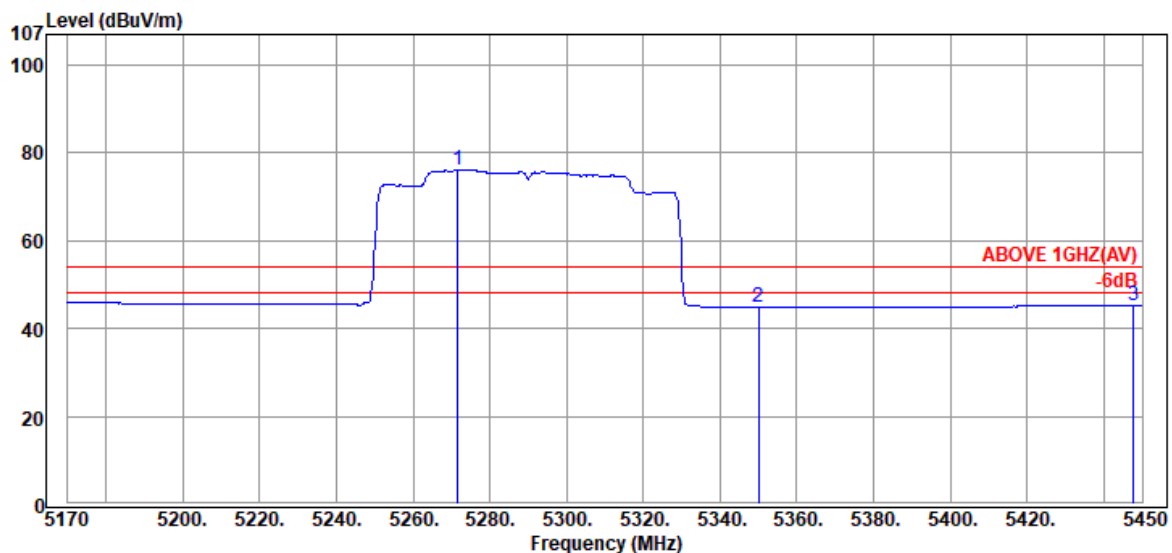

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5271.64	34.44	8.80	32.94	76.18	---	---	Average
	5350.04	34.50	8.84	1.45	44.79	54.00	9.21	Average
	5447.76	34.50	8.89	2.01	45.40	54.00	8.60	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

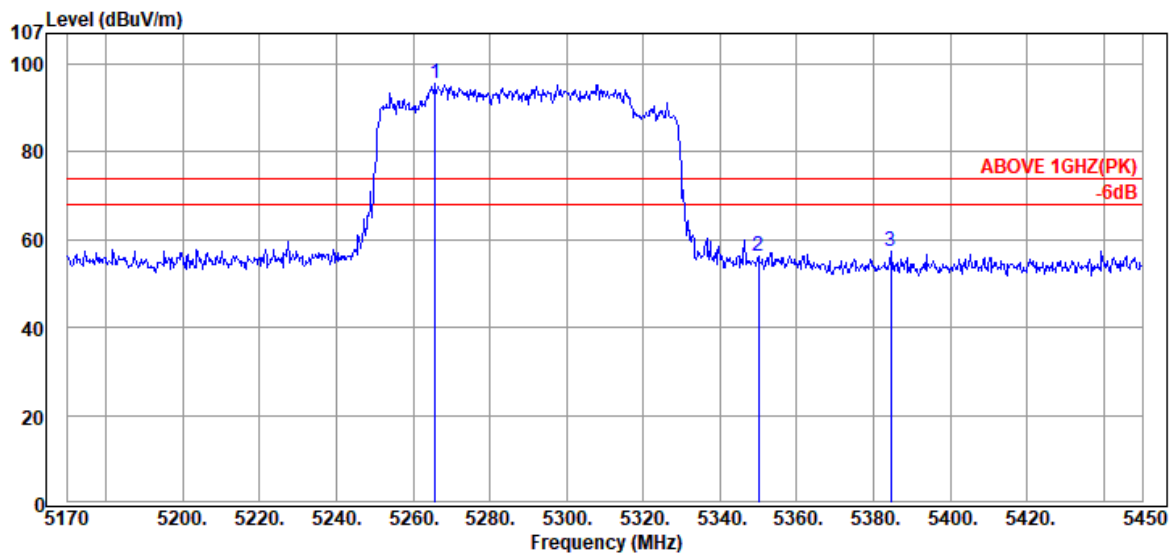

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5265.76	34.43	8.79	52.24	95.46	---	---	Peak
	5350.04	34.50	8.84	12.93	56.27	74.00	17.73	Peak
	5384.48	34.50	8.86	13.95	57.31	74.00	16.69	Peak

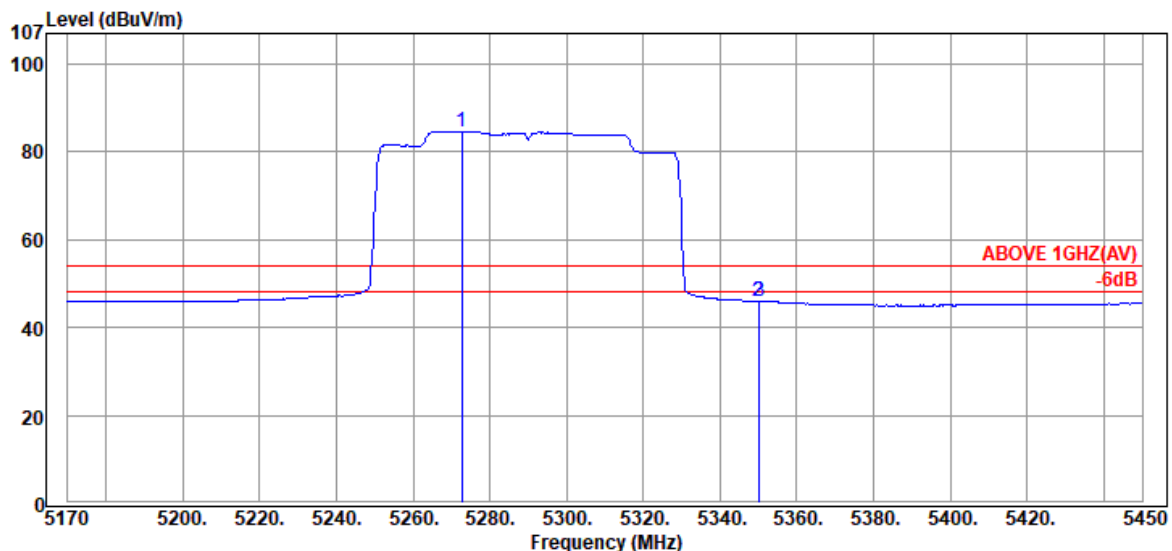

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5272.76	34.45	8.80	41.47	84.72	---	---	Average
	5350.04	34.50	8.84	2.66	46.00	54.00	8.00	Average
	5350.32	34.50	8.84	2.64	45.98	54.00	8.02	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
RU Configuration	996/67	Frequency	TX 5570MHz

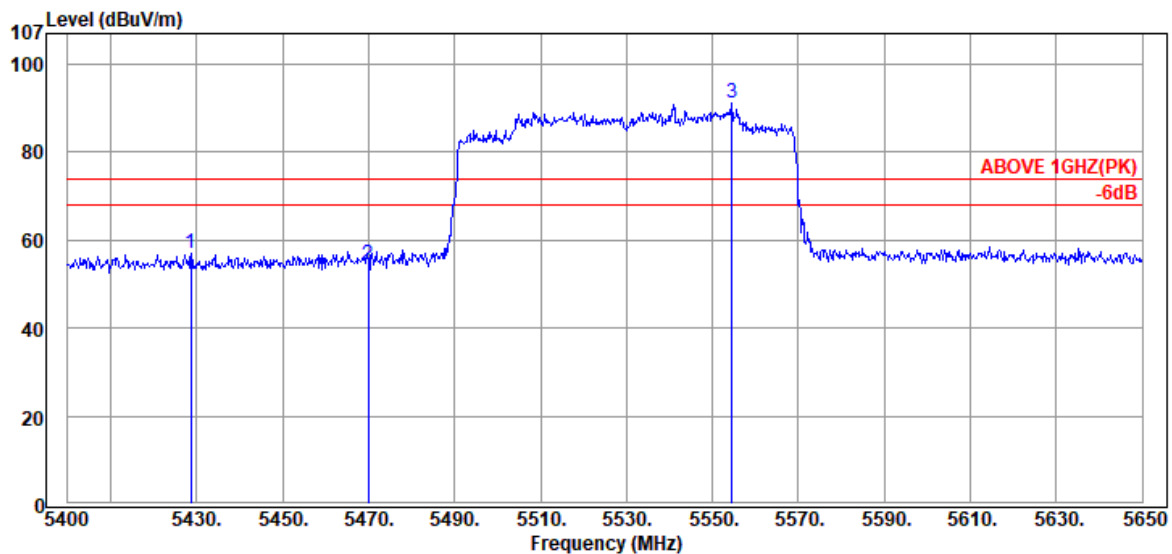

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.75	34.50	8.88	13.77	57.15	74.00	16.85	Peak
5470.00	34.50	8.91	11.01	54.42	74.00	19.58	Peak
@ 5554.50	34.61	8.95	47.72	91.28	---	---	Peak

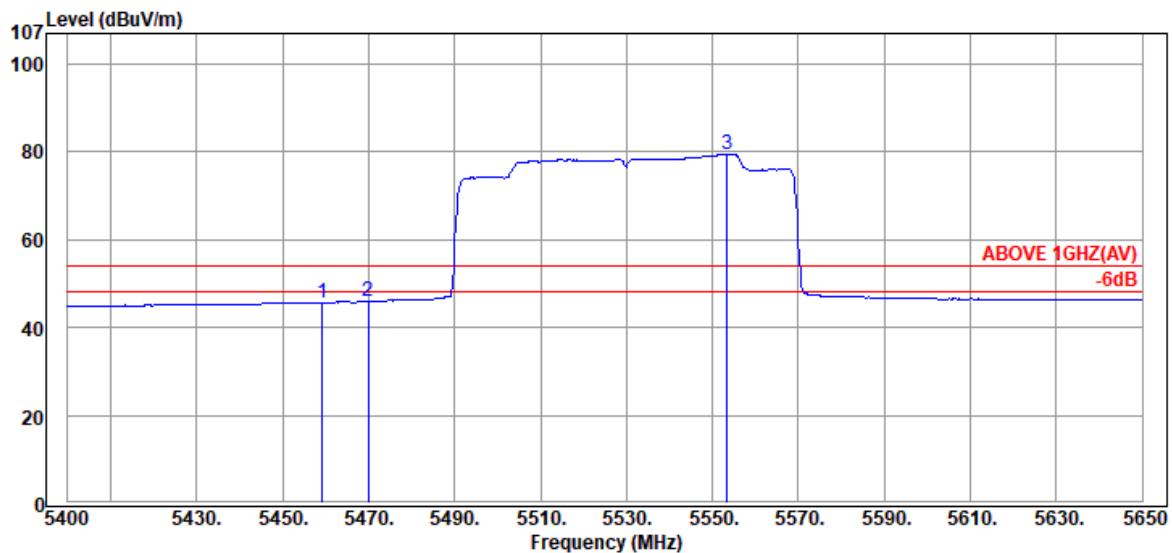

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.25	34.50	8.90	2.33	45.73	54.00	8.27	Average
5470.00	34.50	8.91	2.53	45.94	54.00	8.06	Average
@ 5553.50	34.61	8.95	35.84	79.40	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
RU Configuration	996/67	Frequency	TX 5570MHz

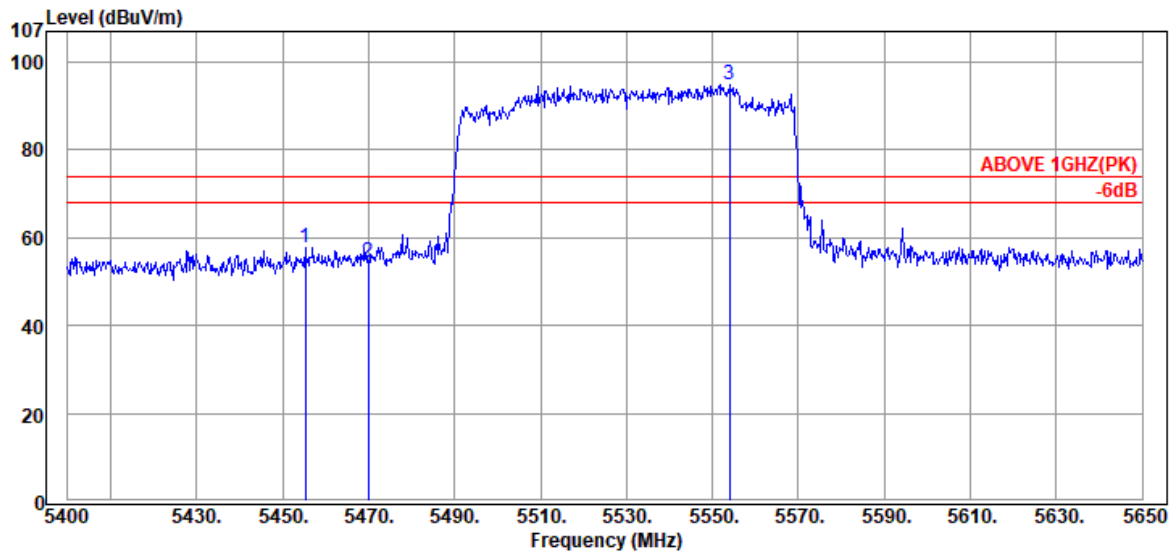

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.25	34.50	8.90	14.43	57.83	74.00	16.17	Peak
5470.00	34.50	8.91	10.95	54.36	74.00	19.64	Peak
@ 5554.00	34.61	8.95	51.49	95.05	---	---	Peak

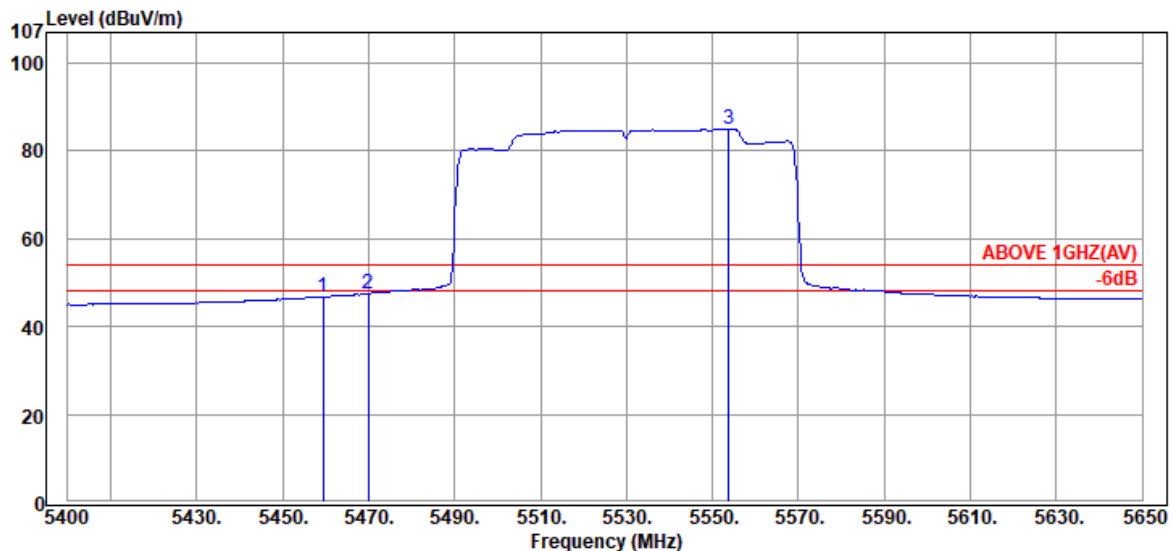

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.50	34.50	8.90	3.33	46.73	54.00	7.27	Average
5470.00	34.50	8.91	4.08	47.49	54.00	6.51	Average
@ 5553.75	34.61	8.95	41.54	85.10	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	II-2C
RU Configuration	996/S67	Frequency	TX 5570MHz

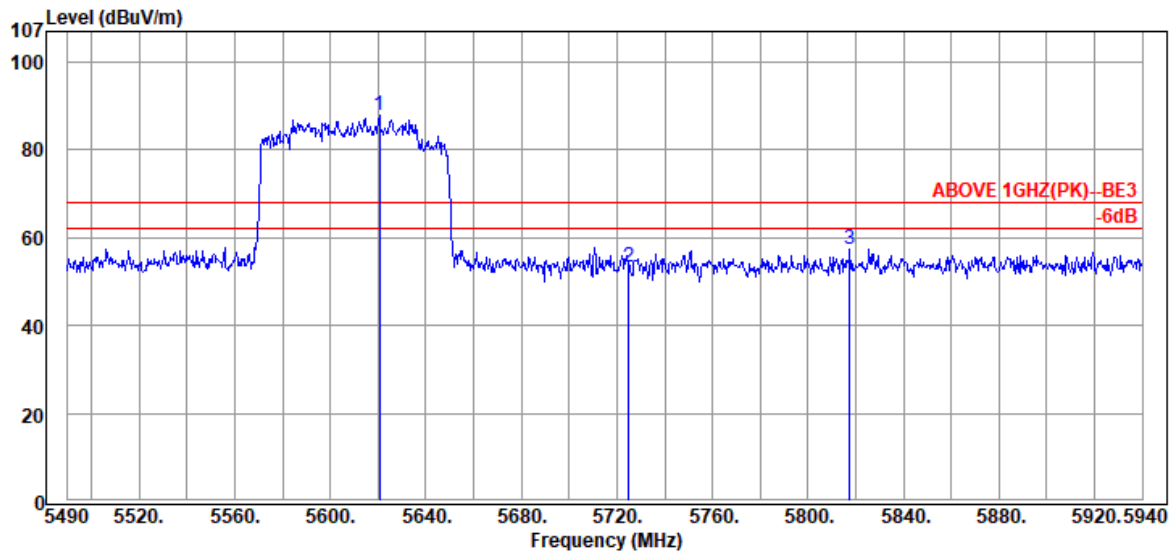

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5620.50	34.66	8.99	44.27	87.92	---	---	Peak
	5724.90	34.40	9.04	9.69	53.13	68.20	15.07	Peak
	5817.60	34.27	9.09	13.94	57.30	68.20	10.90	Peak

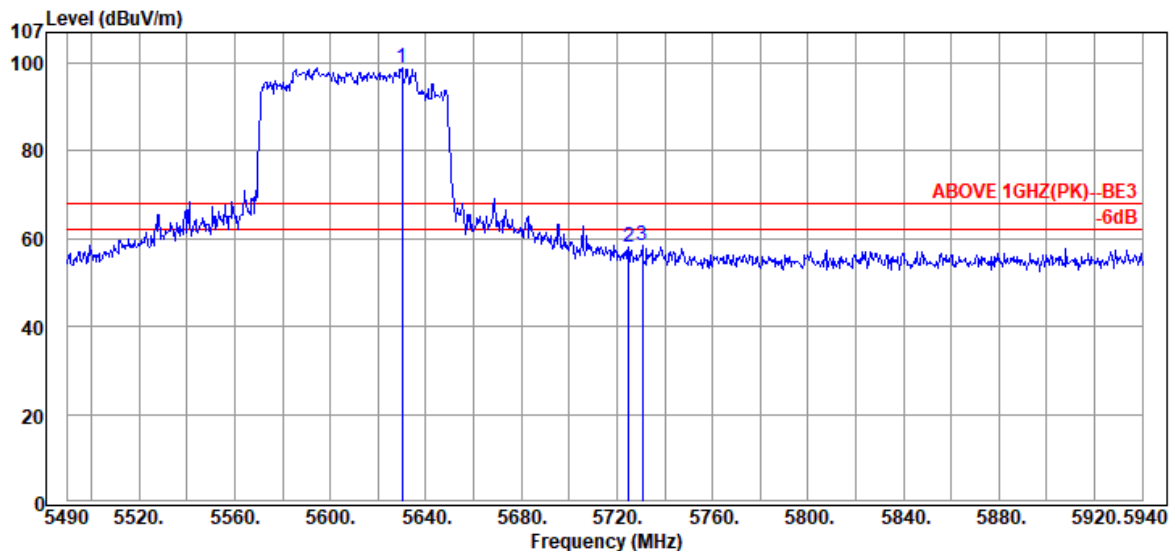

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5629.95	34.64	8.99	55.43	99.06	---	---	Peak
	5724.90	34.40	9.04	14.54	57.98	68.20	10.22	Peak
	5730.75	34.40	9.04	14.88	58.32	68.20	9.88	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228

Report Number: EM-F190522

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	UNII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-3.58	46.62	54.00	7.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-2.98	47.22	54.00	6.78	Peak

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-3.95	46.29	54.00	7.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-2.86	47.38	54.00	6.62	Peak

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-4.16	47.42	54.00	6.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-1.90	49.68	54.00	4.32	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-5.04	47.56	54.00	6.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-4.31	48.29	54.00	5.71	Peak

Mode	802.11a	UNII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.00	40.07	12.75	-6.04	46.78	54.00	7.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.00	40.07	12.75	-5.30	47.52	54.00	6.48	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-3.59	46.61	54.00	7.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-4.31	45.89	54.00	8.11	Peak

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-3.33	46.91	54.00	7.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-3.71	46.53	54.00	7.47	Peak

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-2.22	49.36	54.00	4.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-3.06	48.52	54.00	5.48	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-3.47	49.13	54.00	4.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-4.72	47.88	54.00	6.12	Peak

Mode	802.11n-HT20	UNII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.00	40.17	12.86	-5.84	47.19	54.00	6.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.00	40.17	12.86	-5.55	47.48	54.00	6.52	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-6.06	44.11	54.00	9.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-5.32	44.85	54.00	9.15	Peak

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-6.36	43.89	54.00	10.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-4.87	45.38	54.00	8.62	Peak

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-6.09	46.08	54.00	7.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-6.45	45.72	54.00	8.28	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-5.64	46.88	54.00	7.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-5.70	46.82	54.00	7.18	Peak

Mode	802.11n-HT40	UNII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-7.00	46.07	54.00	7.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-6.79	46.28	54.00	7.72	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-2.28	47.82	54.00	6.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-3.33	46.77	54.00	7.23	Peak

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-2.88	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-3.44	46.83	54.00	7.17	Peak

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-3.05	48.75	54.00	5.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-3.14	48.66	54.00	5.34	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-4.72	47.62	54.00	6.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-4.16	48.18	54.00	5.82	Peak

Mode	802.11ac-VHT80	UNII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-6.30	46.68	54.00	7.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-6.06	46.92	54.00	7.08	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-3.55	46.68	54.00	7.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-4.05	46.18	54.00	7.82	Peak

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-3.65	47.84	54.00	6.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-3.50	47.99	54.00	6.01	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-3.73	46.47	54.00	7.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-2.68	47.52	54.00	6.48	Peak

Mode	802.11ax-HE20	UNII Band	II-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-2.73	47.51	54.00	6.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-2.96	47.28	54.00	6.72	Peak

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-2.87	48.71	54.00	5.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-3.96	47.62	54.00	6.38	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	UNII Band	II-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-4.72	47.88	54.00	6.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-5.64	46.96	54.00	7.04	Peak

Mode	802.11ax-HE20	UNII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11650.00	40.20	12.96	-6.27	46.89	54.00	7.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11650.00	40.20	12.96	-6.84	46.32	54.00	7.68	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	UNII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-3.22	46.95	54.00	7.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-3.51	46.66	54.00	7.34	Peak

Mode	802.11ax-HE40	UNII Band	II-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-3.67	46.58	54.00	7.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-3.60	46.65	54.00	7.35	Peak

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-4.44	47.73	54.00	6.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-4.71	47.46	54.00	6.54	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	UNII Band	II-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-3.61	48.91	54.00	5.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-4.93	47.59	54.00	6.41	Peak

Mode	802.11ax-HE40	UNII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-6.48	46.59	54.00	7.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-5.06	48.01	54.00	5.99	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-3.78	46.32	54.00	7.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-2.99	47.11	54.00	6.89	Peak

Mode	802.11ax-HE80	UNII Band	II-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-3.45	46.82	54.00	7.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-3.03	47.24	54.00	6.76	Peak

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-2.94	48.86	54.00	5.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-3.18	48.62	54.00	5.38	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	II-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-3.23	49.11	54.00	4.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-4.56	47.78	54.00	6.22	Peak

Mode	802.11ax-HE80	UNII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-5.12	47.86	54.00	6.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-6.03	46.95	54.00	7.05	Peak

Mode	802.11ax-HE160	UNII Band	II-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-3.74	46.49	54.00	7.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-2.95	47.28	54.00	6.72	Peak

Mode	802.11ax-HE160	UNII Band	II-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-2.92	48.57	54.00	5.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-2.83	48.66	54.00	5.34	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

A.3 26dB/6dB BANDWIDTH

Test Date	2019/09/23~10/3	Temp./Hum.	24°C/57%
Cable Loss	1	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Test Model	14Z995

A.3.1 26dB/6dB Bandwidth Result

● For 26dB Bandwidth

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	I	5180	22.81	16.805	Reference only
		5200	22.97	16.807	
		5240	23.88	16.796	
	II-2A	5260	23.28	16.823	
		5300	22.95	16.805	
		5320	22.65	16.803	
	II-2C	5500	23.54	16.807	
		5580	23.23	16.767	
		5700	23.08	16.870	
		5720	23.04	16.830	
802.11n-HT20	I	5180	23.71	17.979	Reference only
		5200	23.62	17.944	
		5240	23.07	18.056	
	II-2A	5260	23.53	17.940	
		5300	23.70	17.984	
		5320	23.51	17.953	
	II-2C	5500	23.87	18.008	
		5580	25.08	17.995	
		5700	24.13	17.941	
		5720	24.57	18.035	

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11n-HT40	I	5190	43.90	36.525	Reference only
		5230	44.43	36.413	
	II-2A	5270	44.39	36.422	
		5310	43.23	36.372	
	II-2C	5510	43.15	36.419	
		5550	42.94	36.401	
		5670	43.38	36.409	
		5710	42.80	36.408	
802.11ac-VHT80	I	5210	83.82	75.168	Reference only
	II-2A	5290	84.27	75.078	
	II-2C	5530	84.12	75.110	
		5610	83.55	75.154	
		5690	83.09	75.118	
802.11ac-VHT160	I	5250	163.50	153.050	
	II-2A				
	II-2C	5570	162.60	153.080	

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	I	5180	24.43	19.033	Reference only
		5200	23.80	19.067	
		5240	23.57	19.038	
	II-2A	5260	23.66	19.099	
		5300	24.21	19.084	
		5320	23.91	19.124	
	II-2C	5500	24.21	19.120	
		5580	23.15	19.073	
		5700	23.74	19.095	
		5720	23.95	19.073	
802.11ax-HE40	I	5190	42.11	37.738	Reference only
		5230	42.47	37.818	
	II-2A	5270	42.56	37.861	
		5310	43.47	37.854	
	II-2C	5510	42.03	37.840	
		5550	42.74	37.768	
		5670	41.08	37.850	
		5710	42.61	37.787	
802.11ax-HE80	I	5210	81.78	76.665	Reference only
	II-2A	5290	81.97	76.571	
	II-2C	5530	81.83	76.536	
		5610	81.00	76.499	
		5690	82.38	76.536	
802.11ax-HE160	I	5250	162.50	154.73	
	II-2A				
	II-2C	5570	163.50	155.11	

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	I	5180	26/10	19.87	18.456	Reference only
			52/37	20.20	18.204	
			106/53	20.86	18.233	
	II-2A	5320	26/8	20.14	18.518	
			52/40	21.49	18.158	
			106/54	20.57	17.889	
	II-2C	5500	26/10	20.27	18.583	
			52/37	20.87	18.215	
			106/53	20.89	18.236	
		5700	26/8	19.65	18.236	
			52/40	21.11	18.404	
			106/54	21.62	18.220	
802.11ax-HE40	I	5190	242/61	23.43	18.846	Reference only
	II-2A	5310	242/62	25.43	18.771	
	II-2C	5510	242/61	24.54	18.796	
		5670	242/62	23.92	18.841	
802.11ax-HE80	I	5210	484/65	41.80	37.553	Reference only
	II-2A	5290	484/66	40.97	37.466	
	II-2C	5530	484/65	42.78	37.403	
		5610	484/66	41.89	37.561	
802.11ax-HE160	I/ II-2A	5250	996/67	81.81	76.779	Reference only
			996/S67	81.49	76.969	
	II-2C	5570	996/67	81.68	76.461	
			996/S67	81.49	76.802	

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● For 6dBBandwidth

Mode	UNII Band	Centre Frequency (MHz)	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	III	5745	16.39	16.597	≥ 500kHz
		5785	16.43	16.581	
		5825	16.38	16.571	
802.11n-HT20	III	5745	17.60	17.747	
		5785	17.81	17.821	
		5825	17.79	17.798	
802.11n-HT40	III	5755	36.38	36.296	
		5795	36.42	36.311	
802.11ac-VHT80	III	5775	52.67	75.108	
802.11ax-HE20	III	5745	19.00	19.012	
		5785	19.07	18.984	
		5825	18.34	19.010	
802.11ax-HE40	III	5755	38.03	37.798	
		5795	37.75	37.775	
802.11ax-HE80	III	5775	68.96	76.654	


Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	III	5745	26/10	17.03	18.063	≥ 500kHz
			52/37	17.04	18.137	
			106/53	17.04	18.063	
	III	5825	26/8	2.050	18.502	
			52/40	16.97	17.979	
			106/54	17.14	18.304	
802.11ax-HE40	III	5755	242/61	18.89	18.803	
	III	5795	242/62	18.74	18.805	
802.11ax-HE80	III	5775	484/65	37.69	37.459	
			484/66	37.68	37.422	

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots

- For 26dB Bandwidth

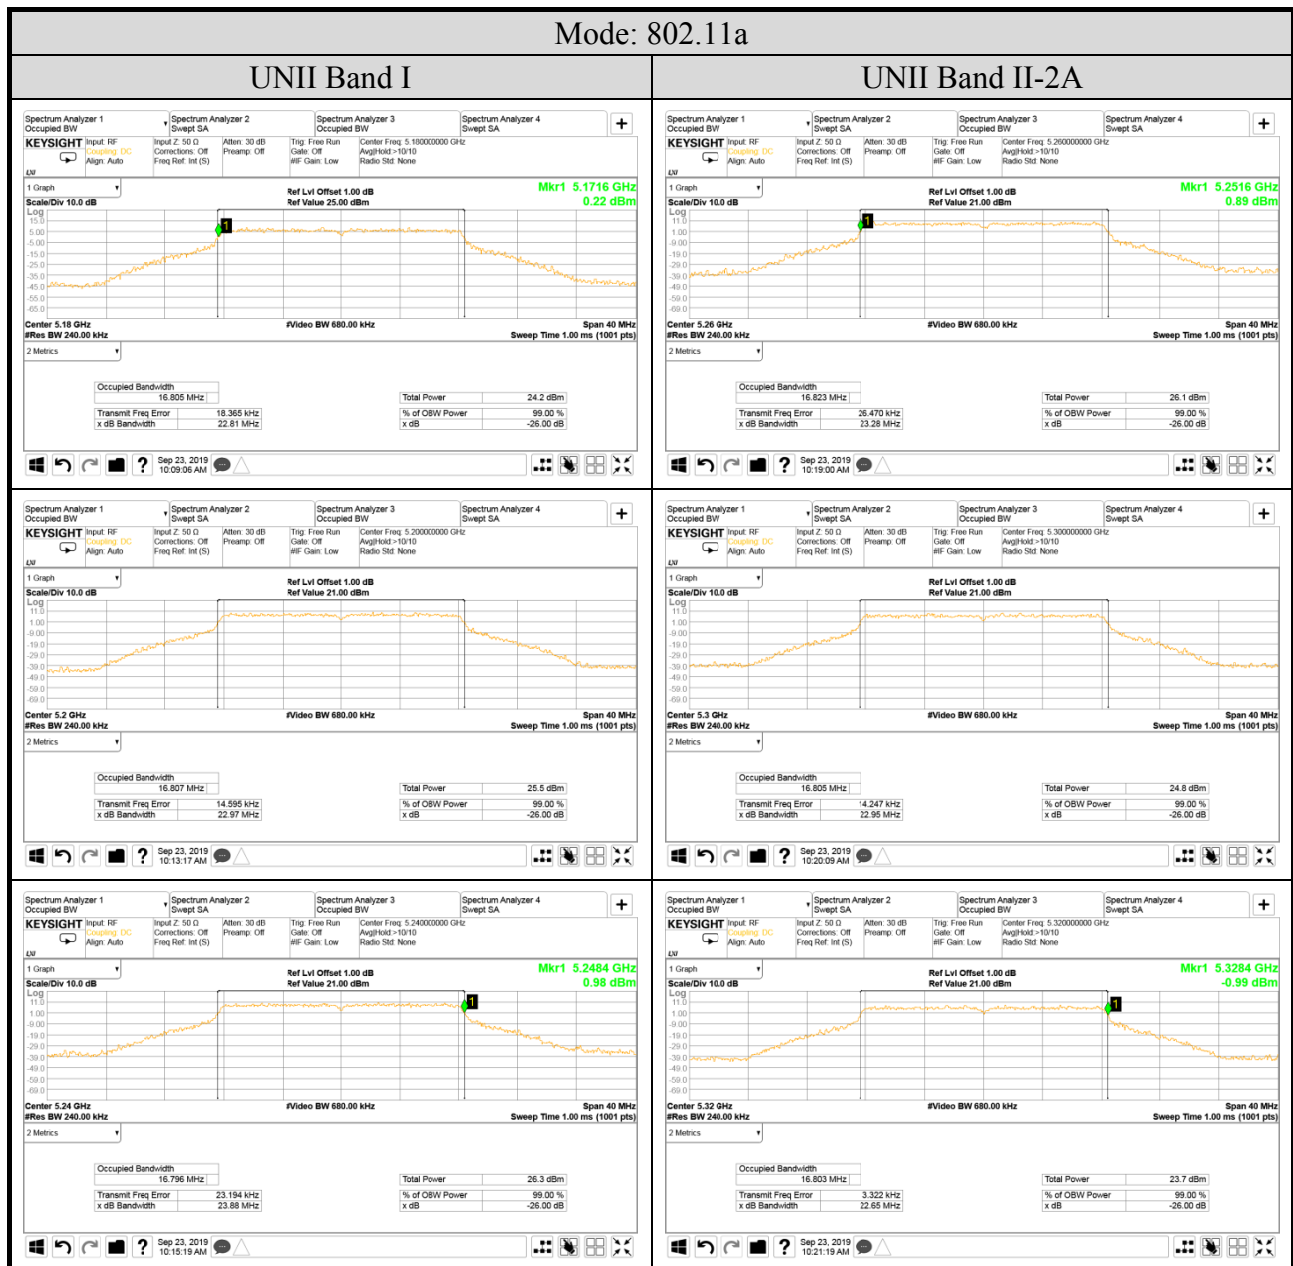


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan



Tel: +886 2 26099301
Fax: +886 2 26099303

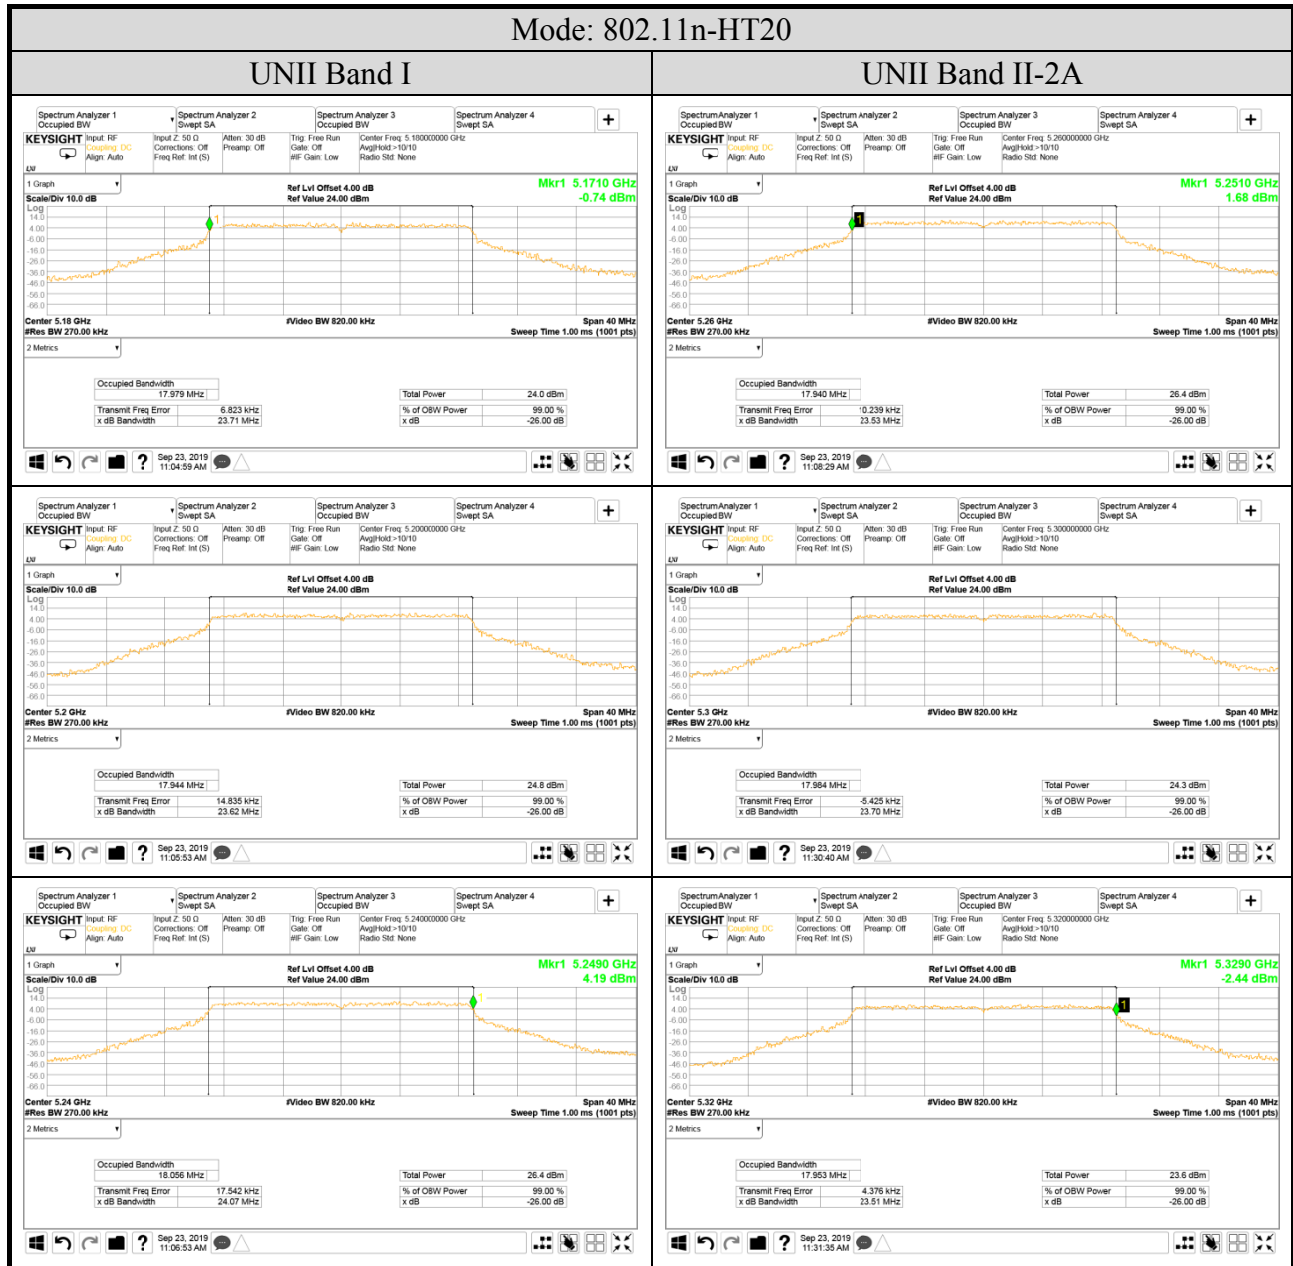

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan



Tel: +886 2 26099301
Fax: +886 2 26099303



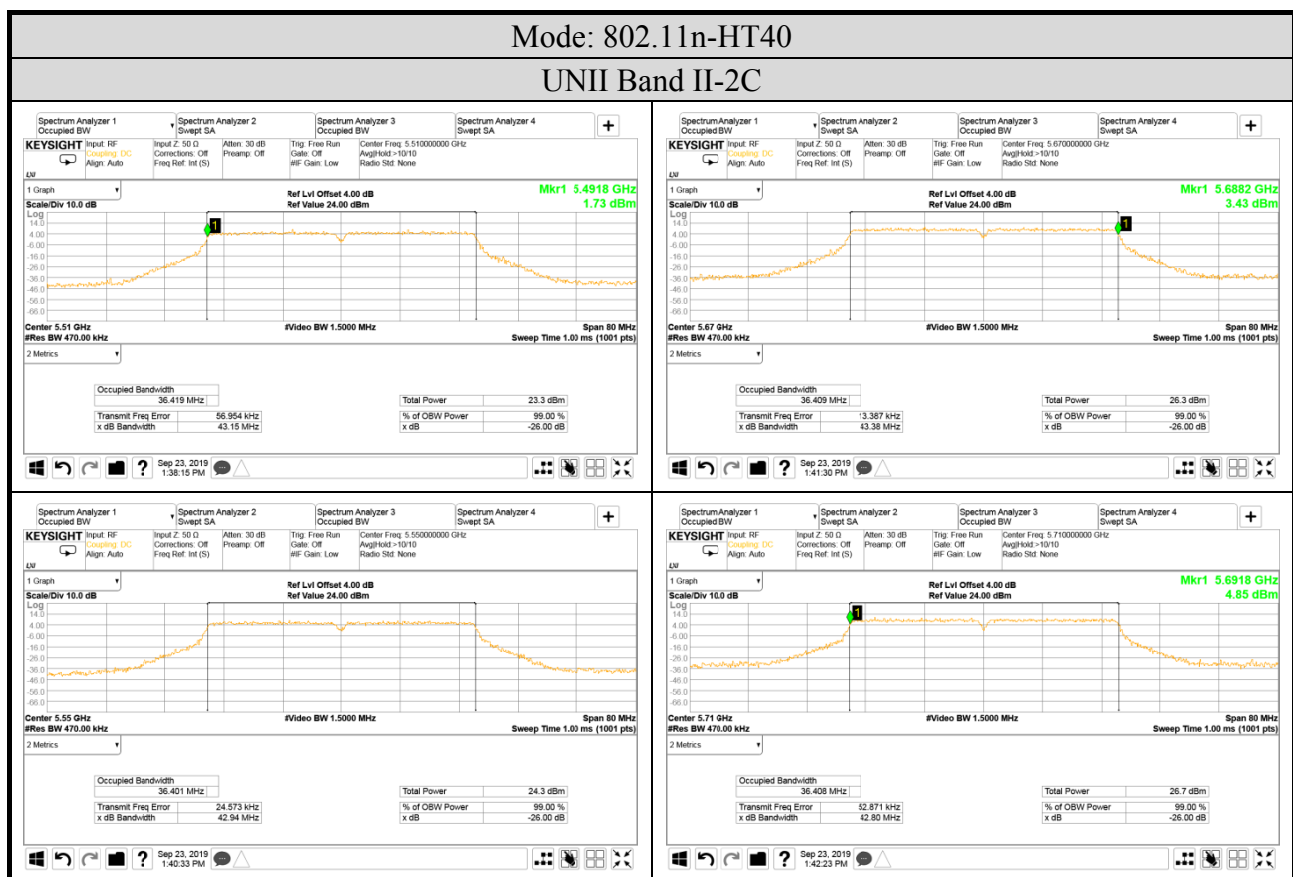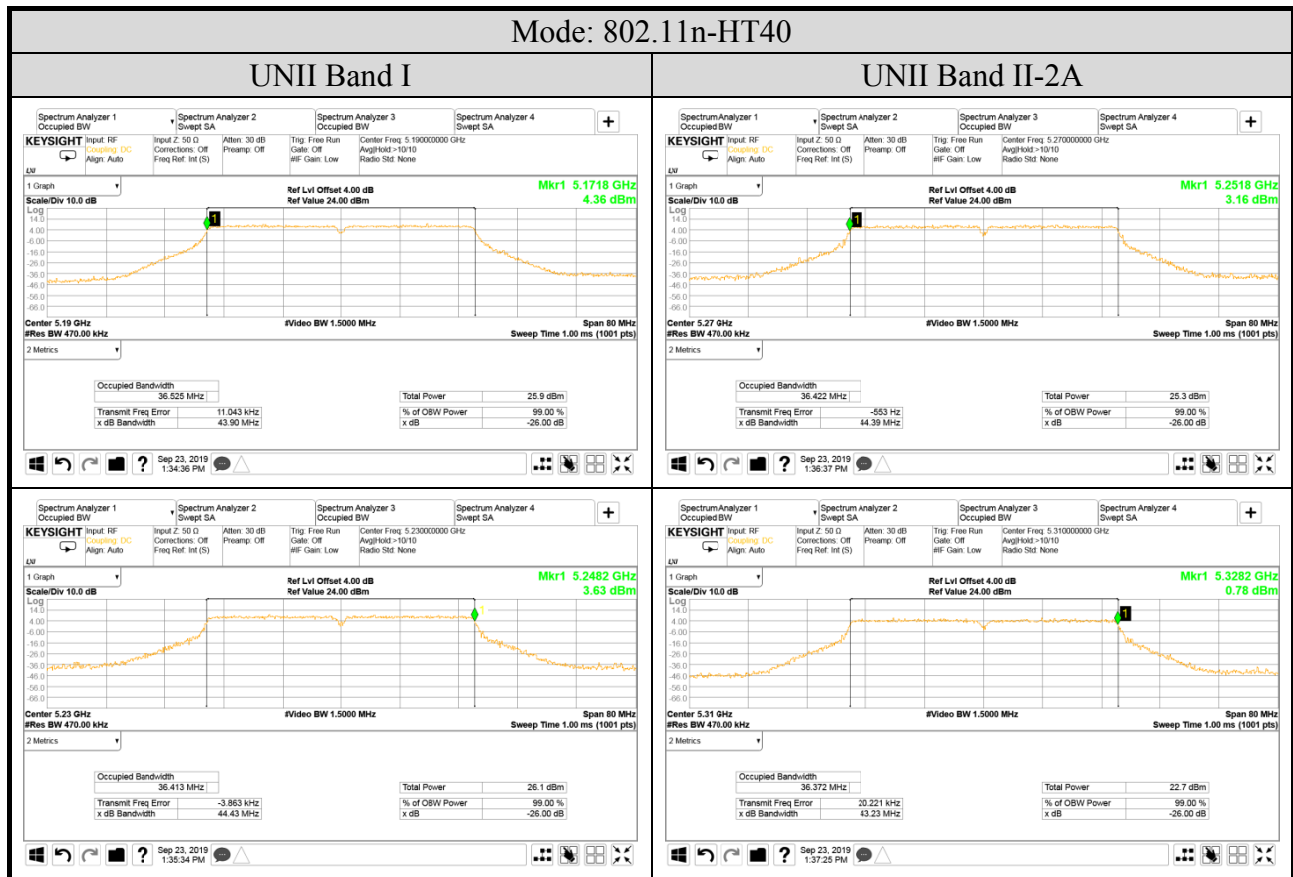


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

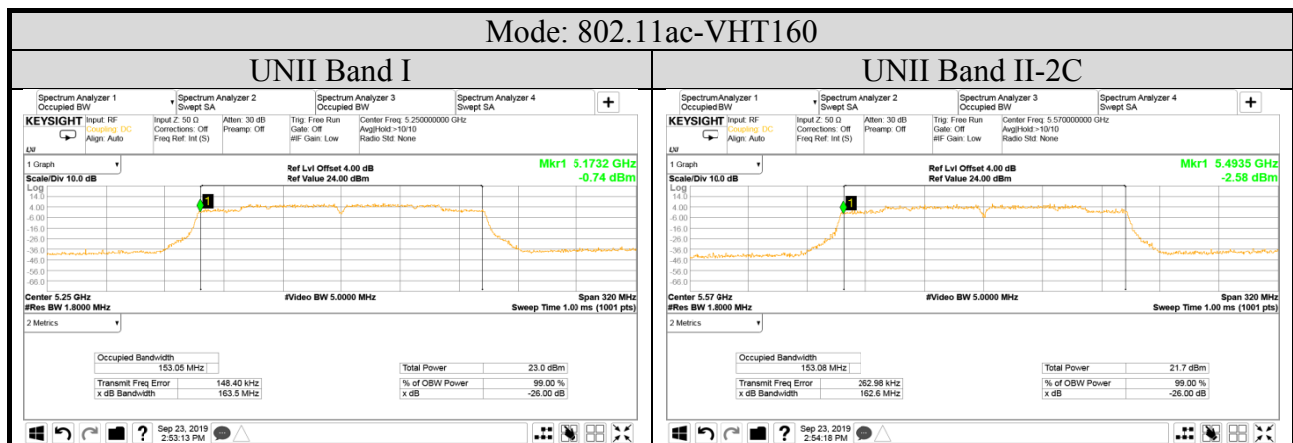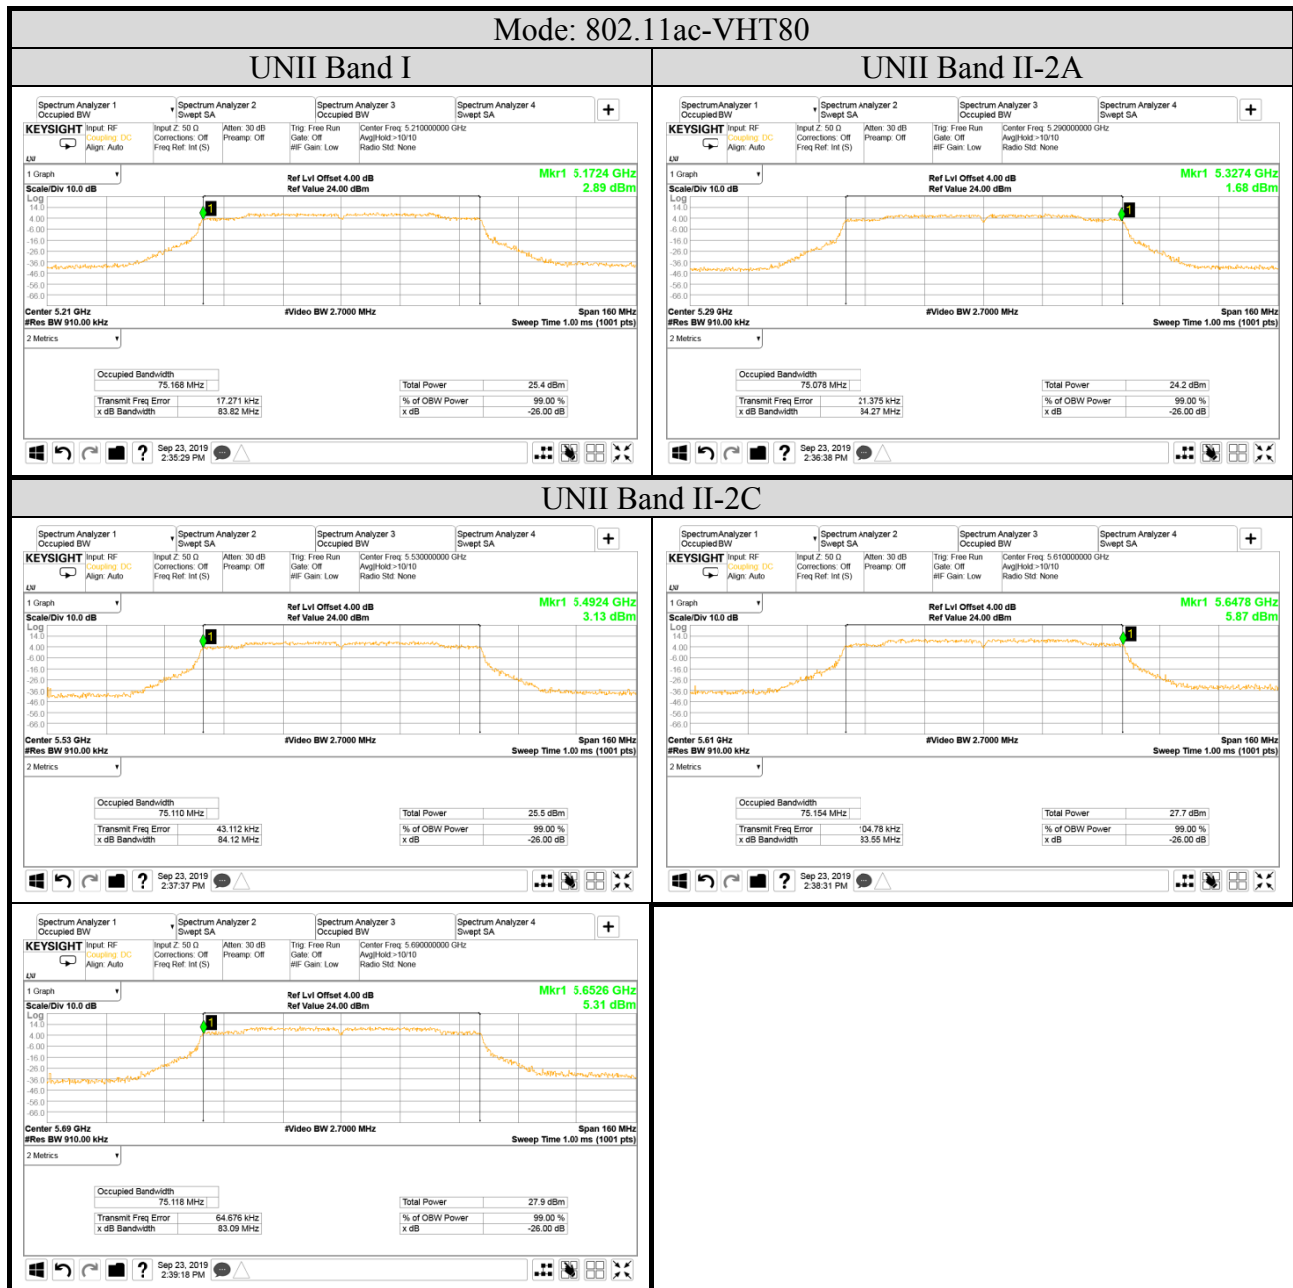

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

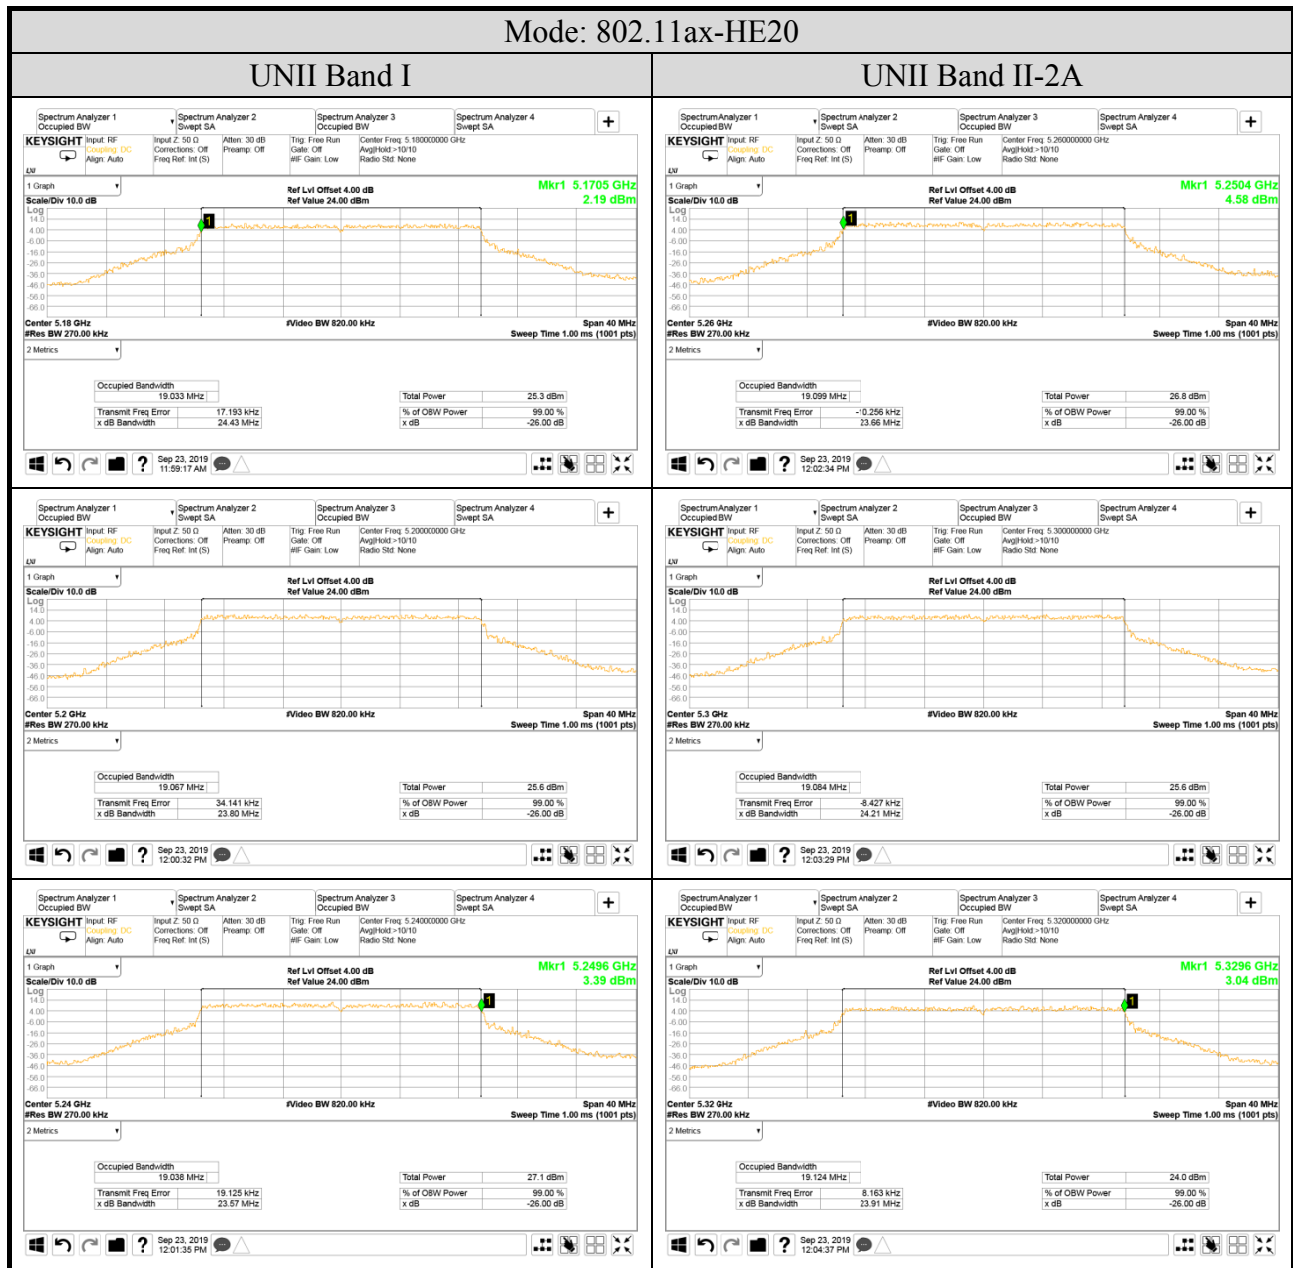

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

