

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	98
A.2.3 Emissions in Non-restricted Frequency Bands:.....	100
A.3 6dB/OCCUPIED BANDWIDTH.....	101
A.3.1 Emission Bandwidth Result.....	101
A.3.2 Measurement Plots	103
A.4 MAXIMUM PEAK OUTPUT POWER	109
A.4.1 Peak Output Power	109
A.4.2 Average Output Power (Reporting only).....	118
A.4.3 Measurement Plots	126
A.5 EMISSION LIMITATIONS	128
A.6 POWER SPECTRAL DENSITY	155
A.6.1 Power Spectral Density Result	155
A.6.2 Measurement Plots	157

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

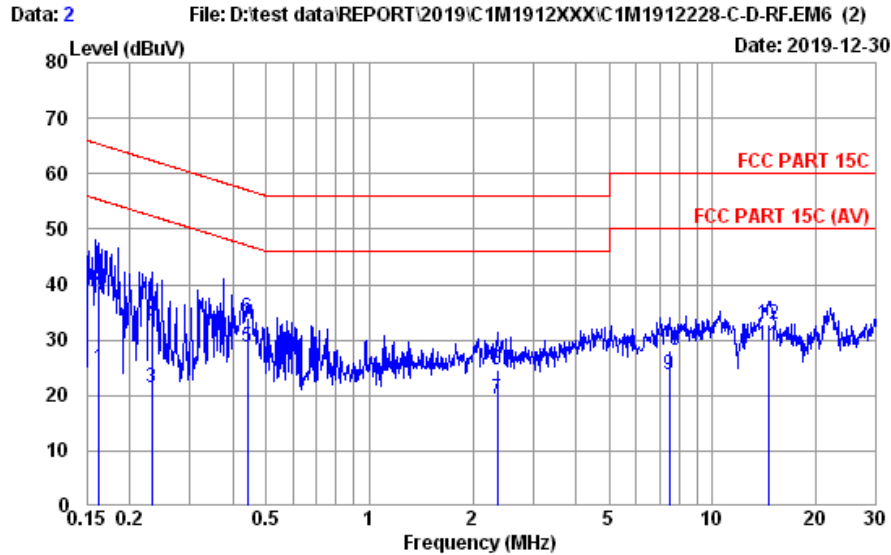

Site no. : No.8 Shielded Room Data no. : 2
Condition : ENV4200 (169) (A) LISN Phase : NEUTRAL
Limit : FCC PART 15C
Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z995
Power Rating : 120Vac/60Hz
Test Mode : Operating


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.72	0.04	9.86	4.20	24.82	55.34	30.52	Average
2	0.162	10.72	0.04	9.86	19.21	39.83	65.34	25.51	QP
3	0.232	10.62	0.04	9.86	0.84	21.36	52.39	31.03	Average
4	0.232	10.62	0.04	9.86	12.31	32.83	62.39	29.56	QP
5	0.442	10.52	0.04	9.86	8.31	28.73	47.02	18.29	Average
6	0.442	10.52	0.04	9.86	13.45	33.87	57.02	23.15	QP
7	2.358	10.57	0.07	9.86	-1.23	19.27	46.00	26.73	Average
8	2.358	10.57	0.07	9.86	4.10	24.60	56.00	31.40	QP
9	7.486	11.19	0.13	9.88	2.63	23.83	50.00	26.17	Average
10	7.486	11.19	0.13	9.88	6.80	28.00	60.00	32.00	QP
11	14.594	12.63	0.16	9.92	6.28	28.99	50.00	21.01	Average
12	14.594	12.63	0.16	9.92	10.10	32.81	60.00	27.19	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

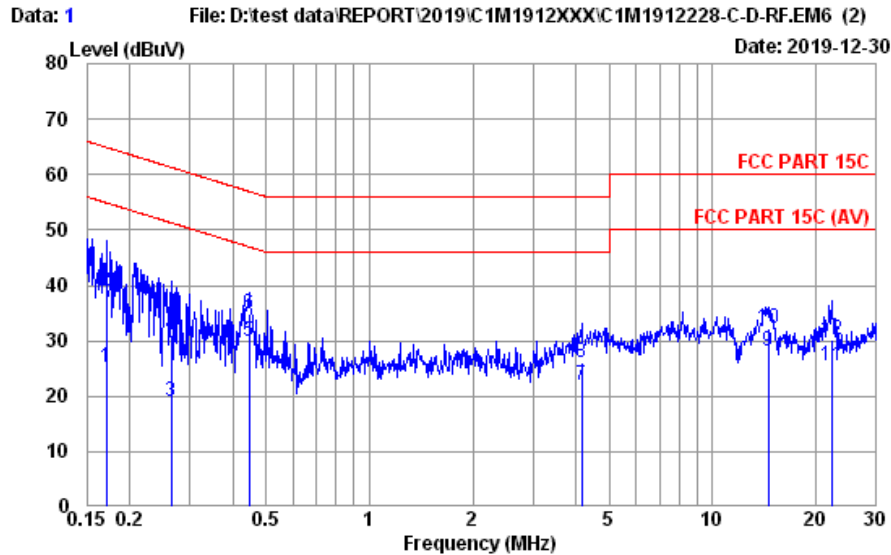

Site no. : No.8 Shielded Room Data no. : 1
Condition : ENV4200 (169) (A) LISN Phase : LINE
Limit : FCC PART 15C
Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
EUT : 14Z995
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.171	10.65	0.04	9.86	4.61	25.16	54.90	29.74	Average
2	0.171	10.65	0.04	9.86	18.32	38.87	64.90	26.03	QP
3	0.264	10.56	0.04	9.86	-1.55	18.91	51.29	32.38	Average
4	0.264	10.56	0.04	9.86	10.56	31.02	61.29	30.27	QP
5	0.447	10.49	0.04	9.86	9.46	29.85	46.93	17.08	Average
6	0.447	10.49	0.04	9.86	14.39	34.78	56.93	22.15	QP
7	4.158	10.63	0.09	9.87	1.40	21.99	46.00	24.01	Average
8	4.158	10.63	0.09	9.87	5.38	25.97	56.00	30.03	QP
9	14.517	12.29	0.16	9.92	5.90	28.27	50.00	21.73	Average
10	14.517	12.29	0.16	9.92	9.98	32.35	60.00	27.65	QP
11	22.180	13.89	0.20	9.96	1.43	25.48	50.00	24.52	Average
12	22.180	13.89	0.20	9.96	6.09	30.14	60.00	29.86	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

A.2 RADIATED EMISSION

Test Date	2019/12/25 ~ 27	Temp./Hum.	22°C/50 ~ 58%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sean Wang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
48.43	15.45	1.54	8.77	25.76	40.00	14.24	Peak
93.05	16.05	2.20	5.92	24.17	43.50	19.33	Peak
239.52	18.30	3.84	6.18	28.32	46.00	17.68	Peak
335.55	20.76	4.99	4.58	30.33	46.00	15.67	Peak
389.87	22.14	5.74	3.86	31.74	46.00	14.26	Peak
927.25	27.51	8.62	2.19	38.32	46.00	7.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	25.03	1.21	7.43	33.67	40.00	6.33	Peak
53.28	13.98	1.62	18.78	34.38	40.00	5.62	Peak
95.96	16.65	2.24	9.89	28.78	43.50	14.72	Peak
177.44	15.53	3.20	13.19	31.92	43.50	11.58	Peak
453.89	23.14	6.37	2.94	32.45	46.00	13.55	Peak
985.45	27.97	8.96	1.46	38.39	54.00	15.61	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
48.43	15.45	1.54	8.24	25.23	40.00	14.77	Peak
101.78	17.50	2.31	3.69	23.50	43.50	20.00	Peak
216.24	17.15	3.60	7.68	28.43	46.00	17.57	Peak
335.55	20.76	4.99	4.76	30.51	46.00	15.49	Peak
938.89	27.61	8.69	1.42	37.72	46.00	8.28	Peak
980.60	27.92	8.93	2.00	38.85	54.00	15.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	25.03	1.21	7.16	33.40	40.00	6.60	Peak
53.28	13.98	1.62	20.19	35.79	40.00	4.21	Peak
95.96	16.65	2.24	9.49	28.38	43.50	15.12	Peak
177.44	15.53	3.20	10.00	28.73	43.50	14.77	Peak
455.83	23.16	6.39	3.84	33.39	46.00	12.61	Peak
999.03	28.07	9.03	4.17	41.27	54.00	12.73	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

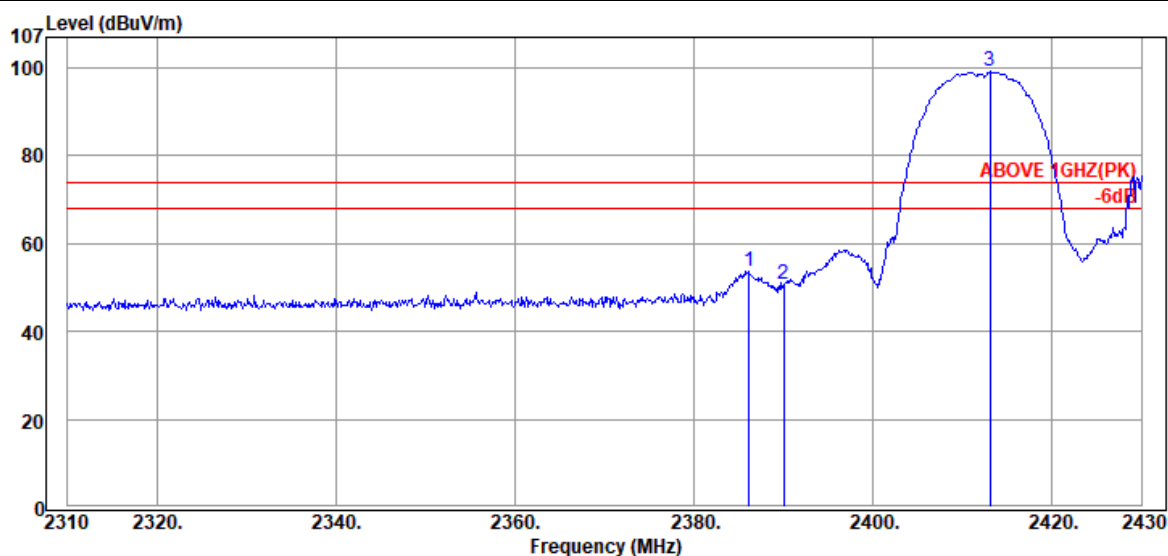

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.20	28.29	6.02	19.36	53.67	74.00	20.33	Peak
2390.04	28.32	6.03	16.37	50.72	74.00	23.28	Peak
@ 2413.08	28.43	6.05	64.64	99.12	---	---	Peak

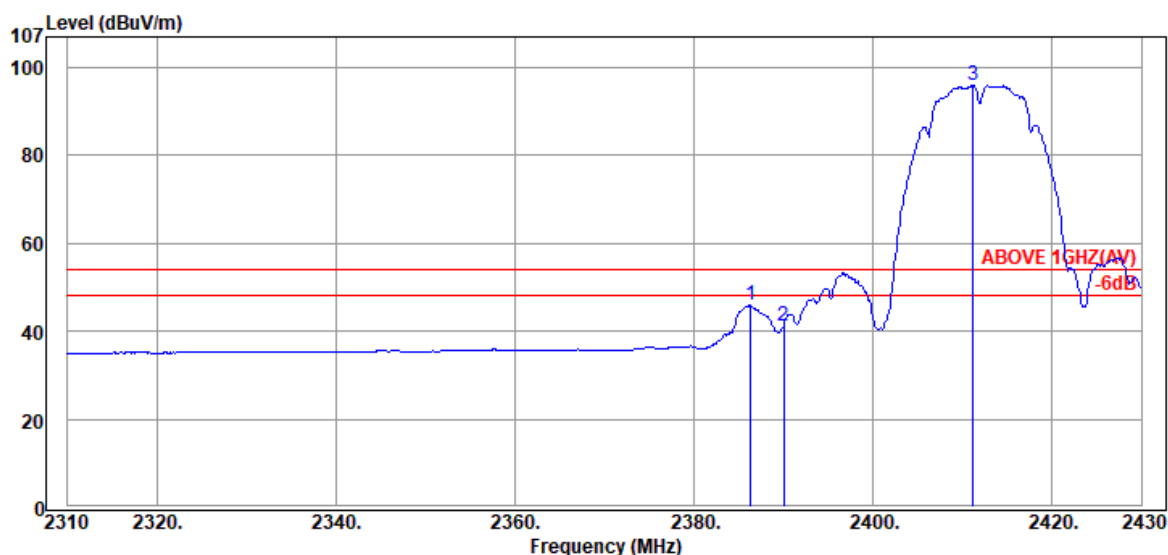

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.32	28.29	6.02	11.60	45.91	54.00	8.09	Average
2390.04	28.32	6.03	6.87	41.22	54.00	12.78	Average
@ 2411.16	28.42	6.05	61.54	96.01	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

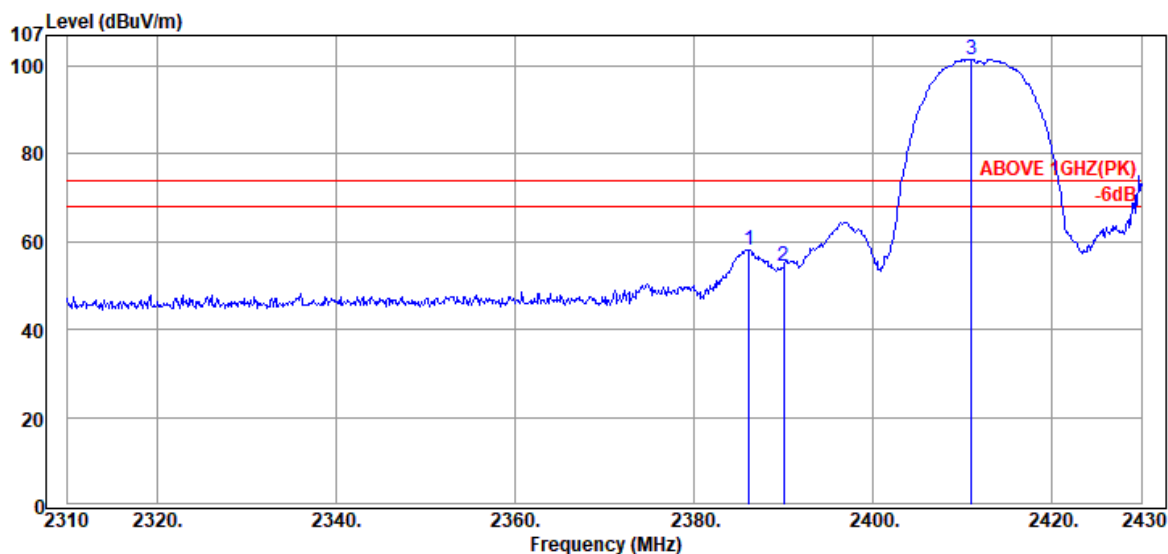

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.20	28.29	6.02	23.94	58.25	74.00	15.75	Peak
2390.04	28.32	6.03	20.17	54.52	74.00	19.48	Peak
@ 2411.04	28.42	6.05	67.09	101.56	---	---	Peak

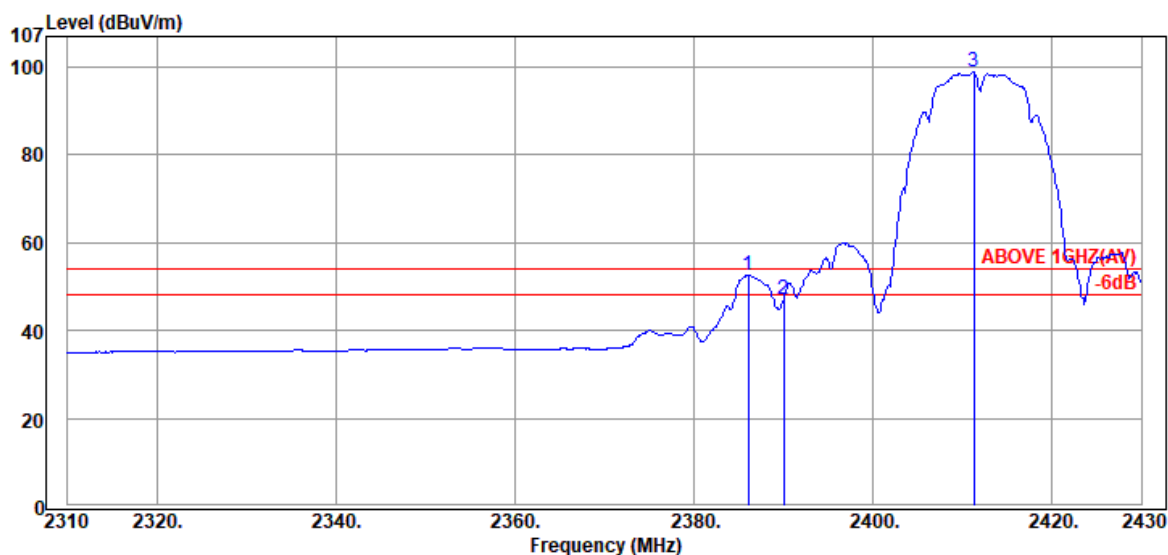


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.08	28.29	6.02	18.37	52.68	54.00	1.32	Average
2390.04	28.32	6.03	12.63	46.98	54.00	7.02	Average
@ 2411.28	28.42	6.05	64.28	98.75	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

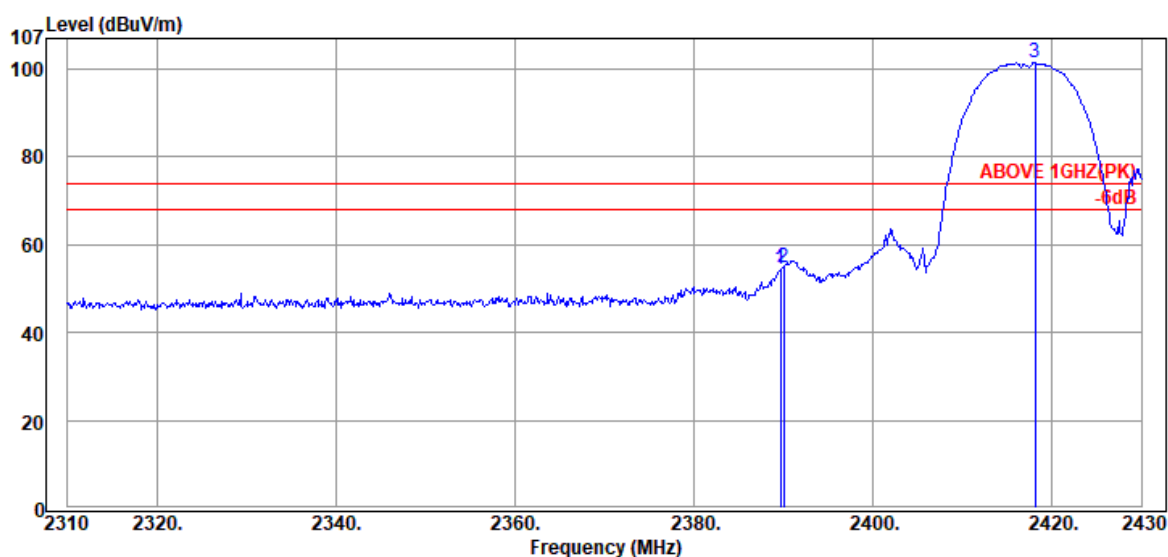

Antenna at Horizontal Polarization

Antenna at Horizontal Polarization							
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	19.90	54.24	74.00	19.76	Peak
2390.04	28.32	6.03	20.51	54.86	74.00	19.14	Peak
@ 2418.12	28.44	6.06	67.02	101.52	---	---	Peak

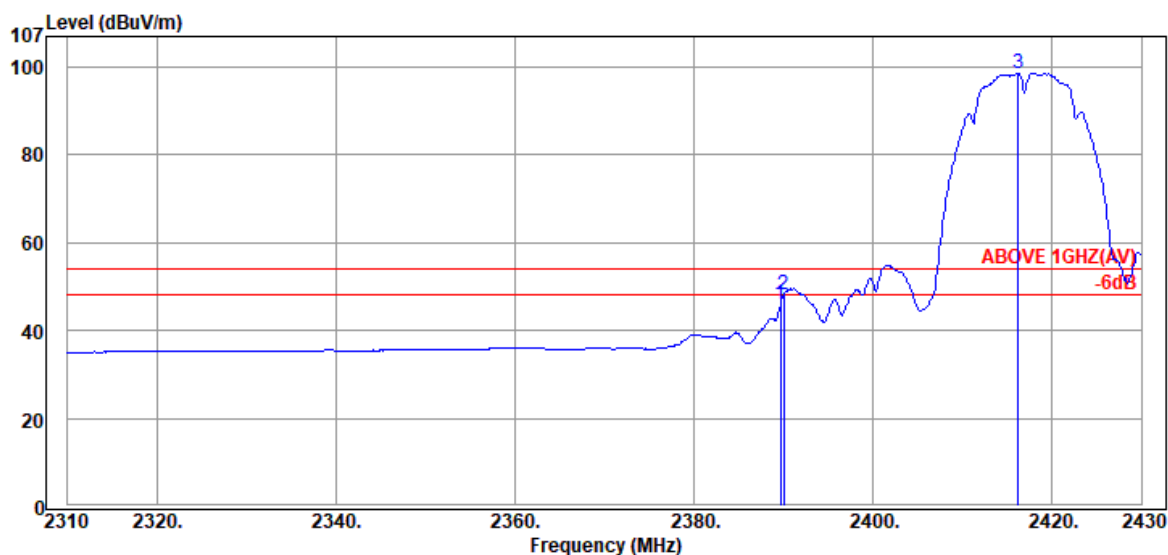

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
	2389.68	28.32	6.02	11.53	45.87	54.00	8.13	Average
	2390.04	28.32	6.03	13.98	48.33	54.00	5.67	Average
@	2416.20	28.43	6.06	64.23	98.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

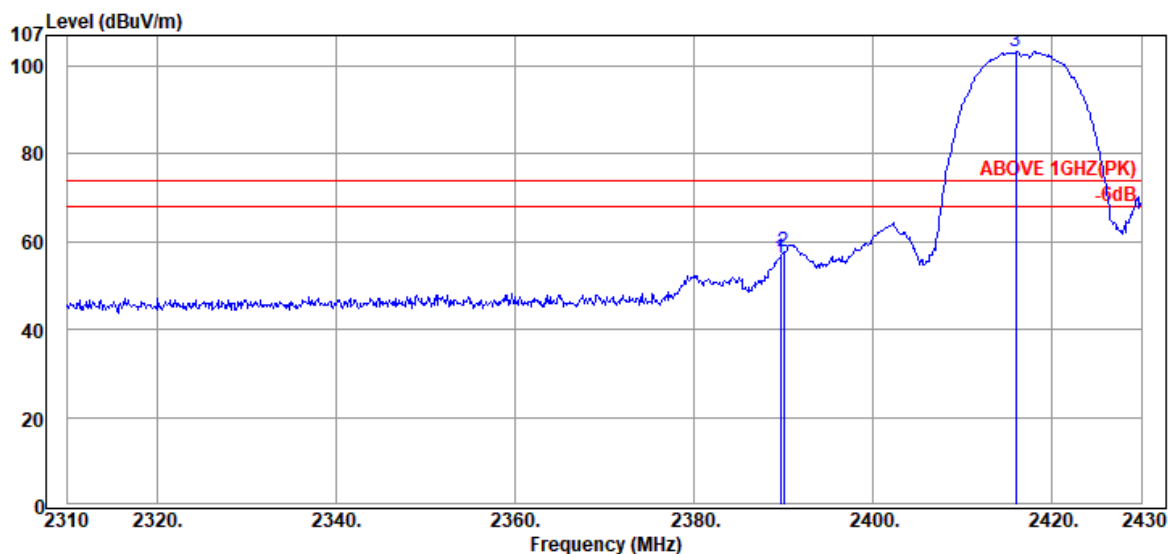

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	22.10	56.44	74.00	17.56	Peak
2390.04	28.32	6.03	23.38	57.73	74.00	16.27	Peak
@ 2415.96	28.43	6.05	68.73	103.21	---	---	Peak

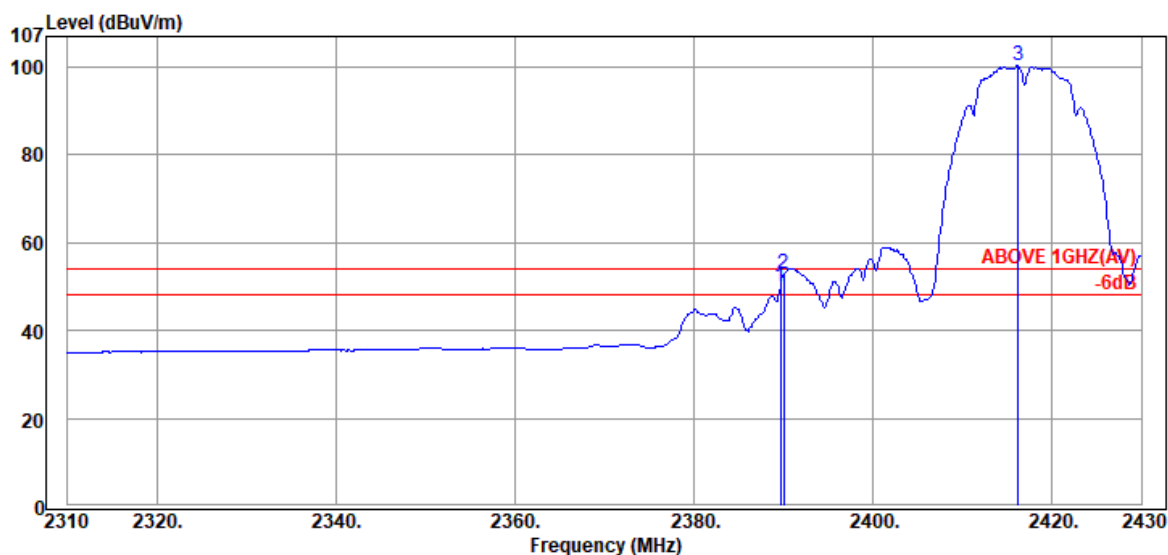

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	15.80	50.14	54.00	3.86	Average
2390.04	28.32	6.03	18.48	52.83	54.00	1.17	Average
@ 2416.20	28.43	6.06	65.78	100.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

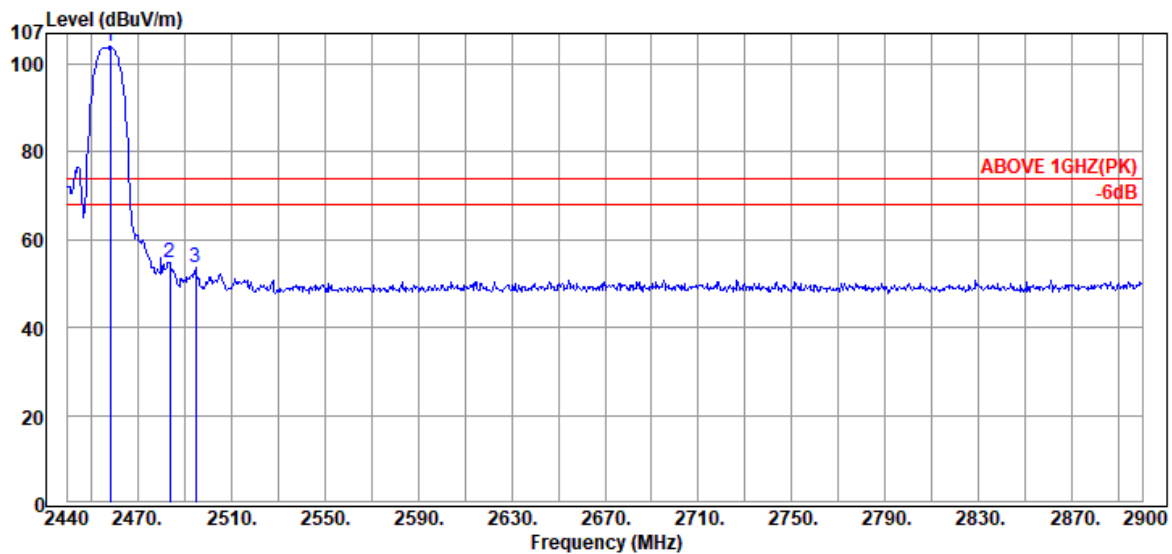

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.40	28.55	6.10	69.47	104.12	---	---	Peak
2483.70	28.70	6.13	20.01	54.84	74.00	19.16	Peak
2494.74	28.77	6.14	18.87	53.78	74.00	20.22	Peak

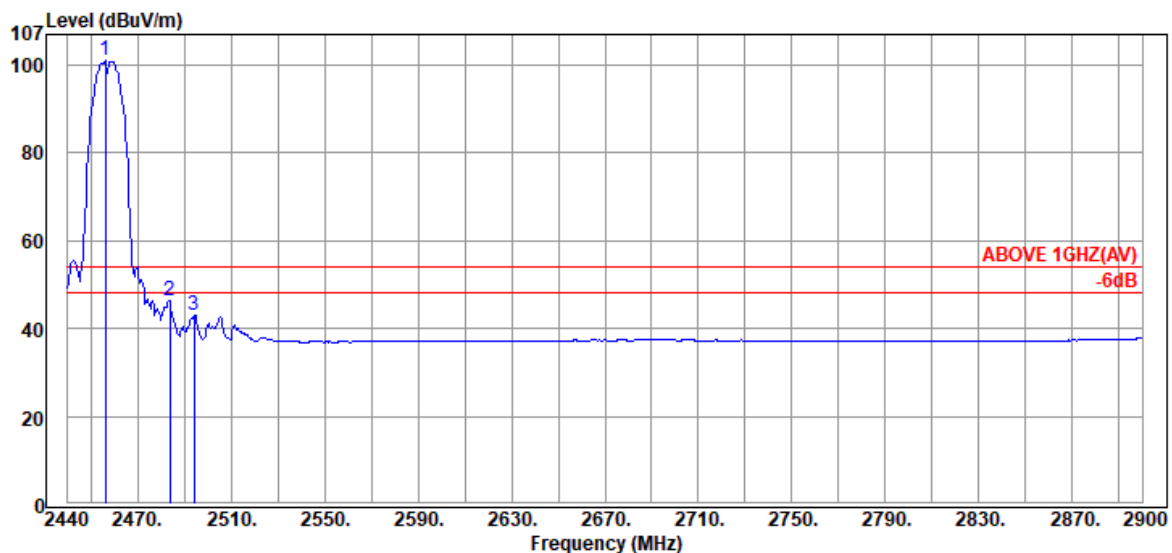

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.10	28.54	6.10	66.30	100.94	---	---	Average
2483.70	28.70	6.13	11.65	46.48	54.00	7.52	Average
2494.28	28.77	6.14	8.17	43.08	54.00	10.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

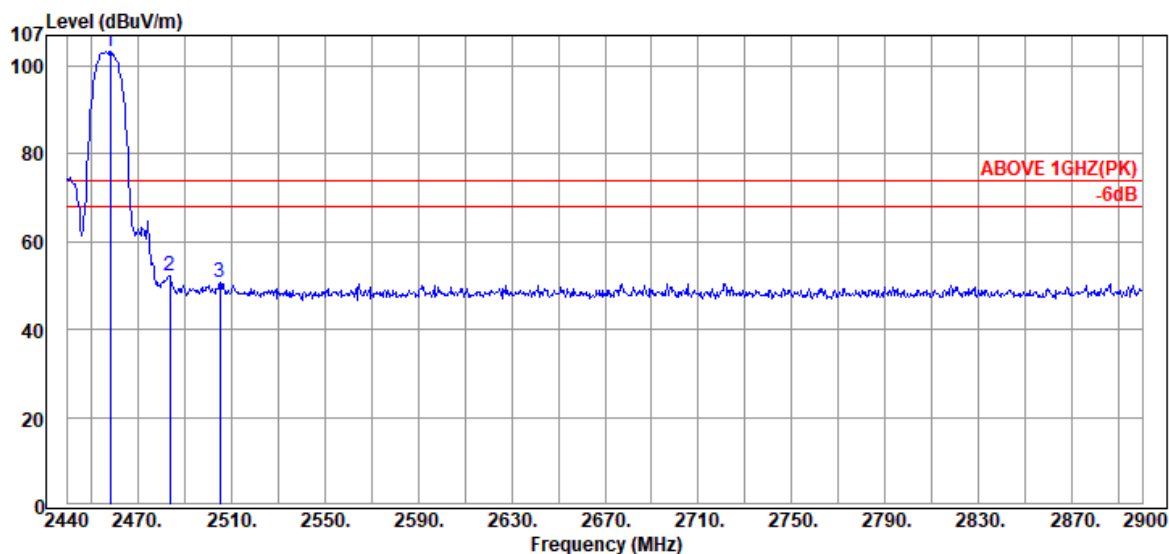

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.40	28.55	6.10	68.72	103.37	---	---	Peak
2483.70	28.70	6.13	17.52	52.35	74.00	21.65	Peak
2505.32	28.81	6.16	15.70	50.67	74.00	23.33	Peak

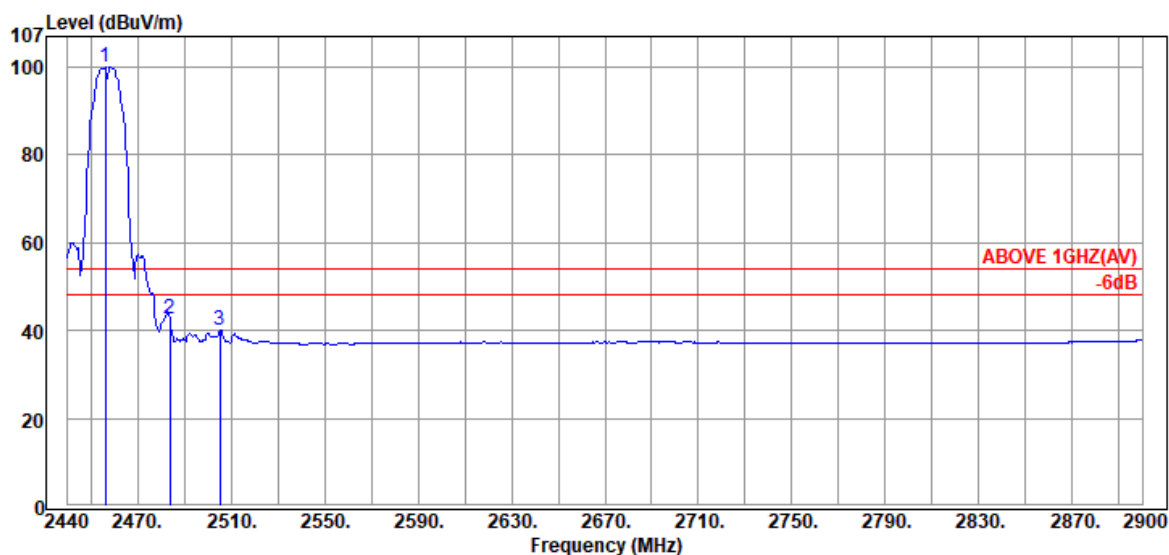

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.10	28.54	6.10	65.55	100.19	---	---	Average
2483.70	28.70	6.13	7.72	42.55	54.00	11.45	Average
2505.32	28.81	6.16	5.16	40.13	54.00	13.87	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

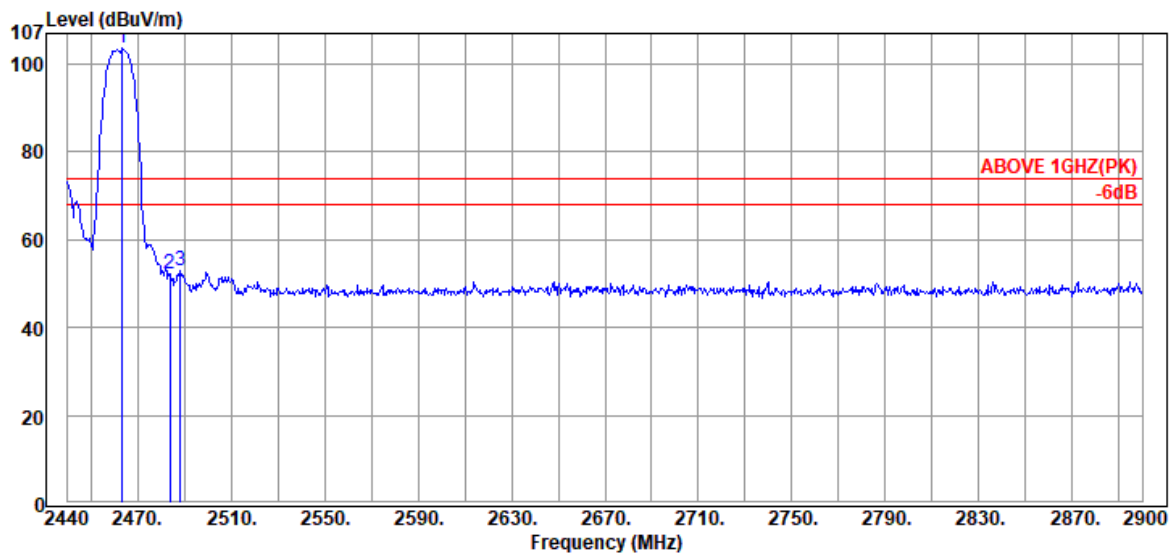

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.46	28.58	6.11	68.88	103.57	---	---	Peak
2483.70	28.70	6.13	17.37	52.20	74.00	21.80	Peak
2488.30	28.73	6.14	17.96	52.83	74.00	21.17	Peak

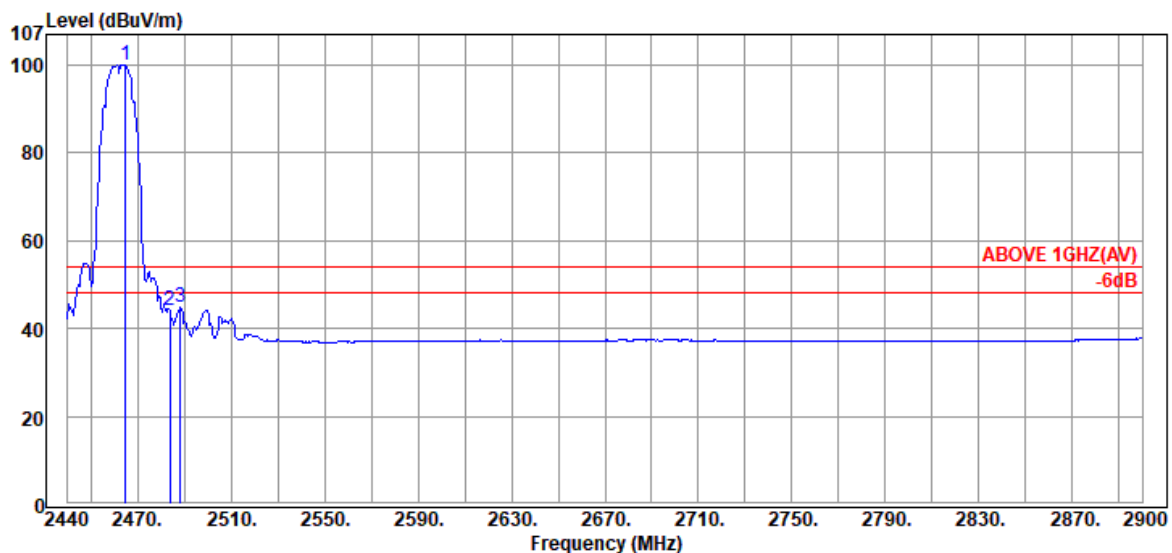

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.84	28.59	6.11	65.49	100.19	---	---	Average
2483.70	28.70	6.13	9.38	44.21	54.00	9.79	Average
2488.30	28.73	6.14	10.06	44.93	54.00	9.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

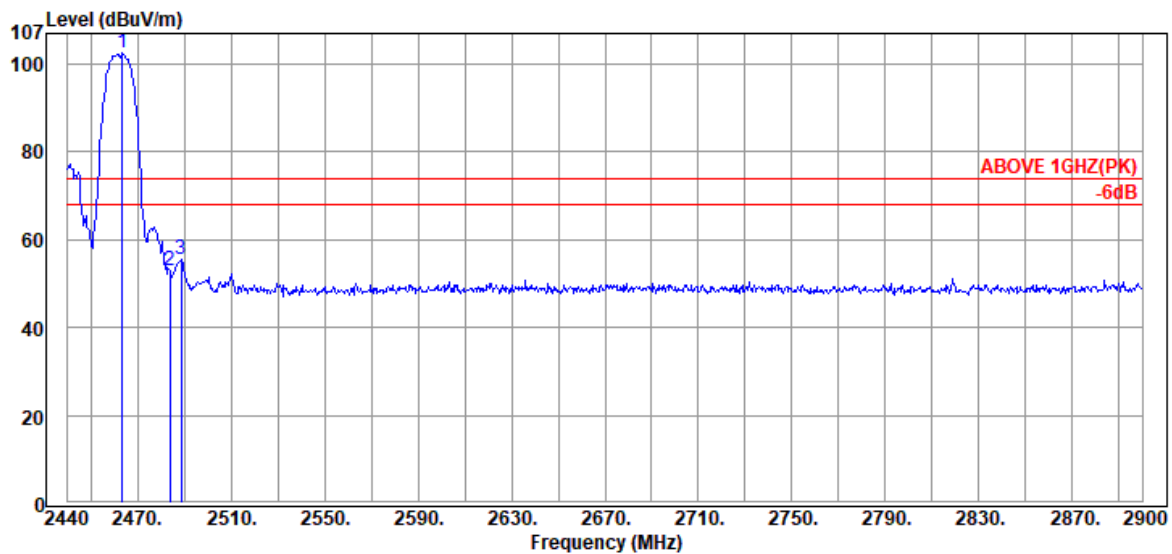

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.46	28.58	6.11	67.74	102.43	---	---	Peak
	2483.70	28.70	6.13	18.01	52.84	74.00	21.16	Peak
	2488.76	28.73	6.14	20.52	55.39	74.00	18.61	Peak

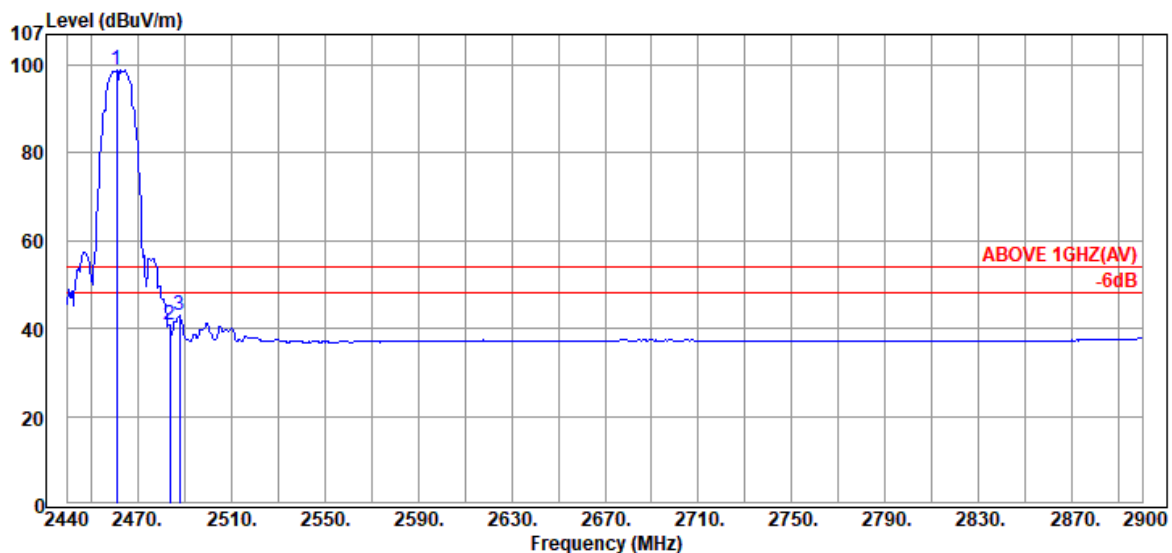

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.16	28.57	6.11	64.21	98.89	---	---	Average
	2483.70	28.70	6.13	5.88	40.71	54.00	13.29	Average
	2487.84	28.73	6.14	8.00	42.87	54.00	11.13	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

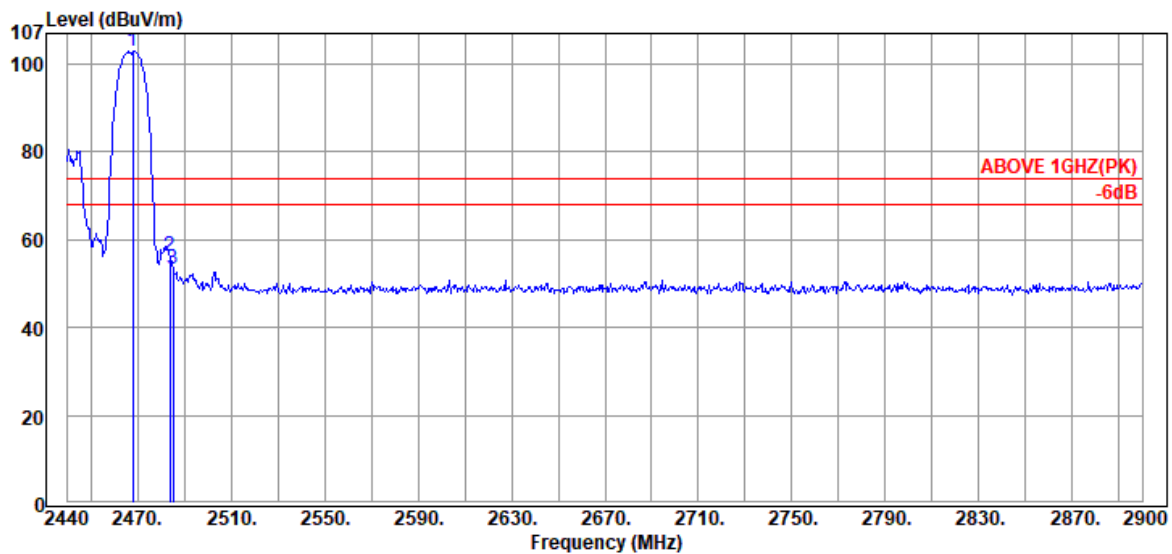

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.06	28.61	6.11	68.35	103.07	---	---	Peak
2483.70	28.70	6.13	21.47	56.30	74.00	17.70	Peak
2485.08	28.71	6.13	18.39	53.23	74.00	20.77	Peak

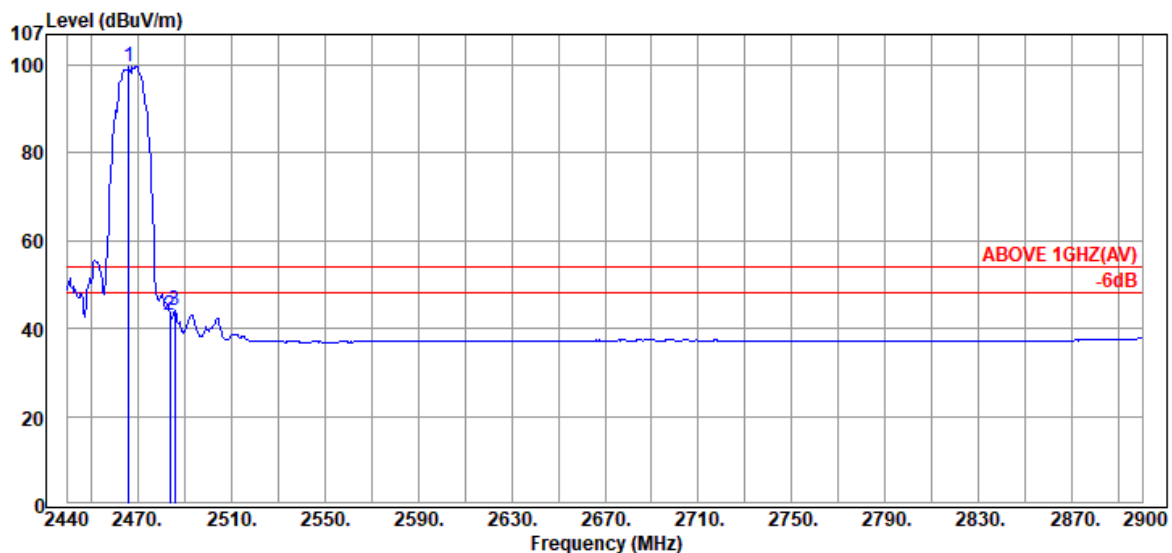

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.22	28.60	6.11	64.90	99.61	---	---	Average
2483.70	28.70	6.13	8.11	42.94	54.00	11.06	Average
2486.00	28.72	6.13	9.11	43.96	54.00	10.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

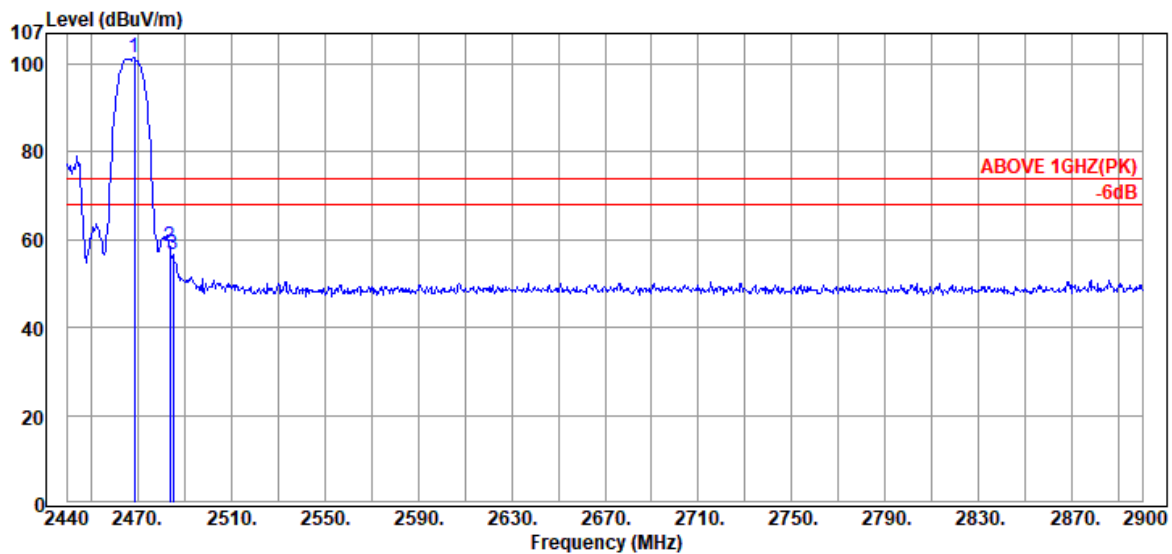

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.52	28.61	6.11	66.75	101.47	---	---	Peak
2483.70	28.70	6.13	23.48	58.31	74.00	15.69	Peak
2485.08	28.71	6.13	21.64	56.48	74.00	17.52	Peak

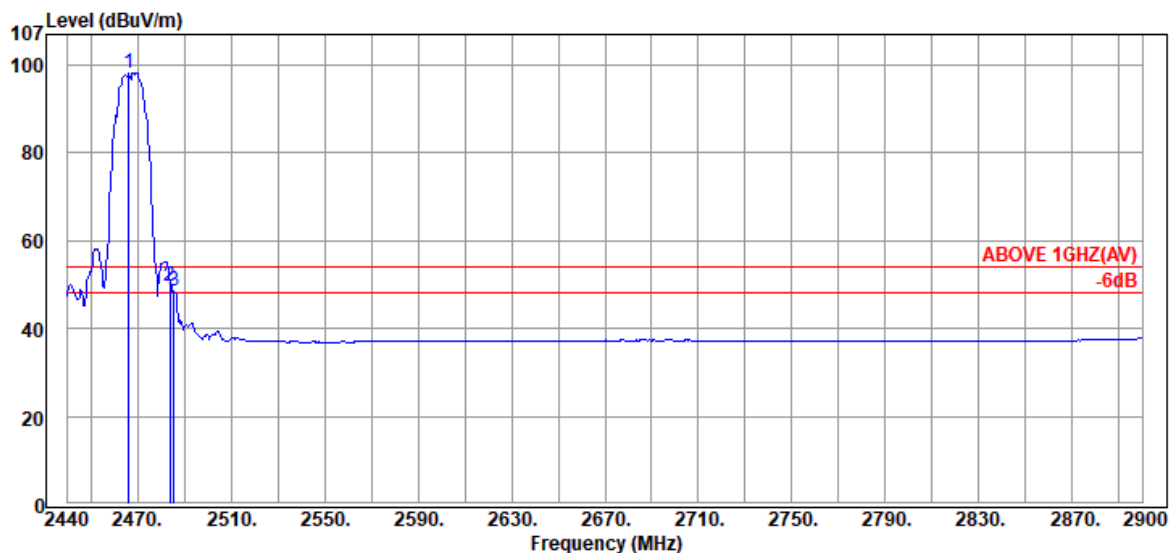

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.22	28.60	6.11	63.56	98.27	---	---	Average
2483.70	28.70	6.13	14.87	49.70	54.00	4.30	Average
2485.54	28.71	6.13	13.52	48.36	54.00	5.64	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

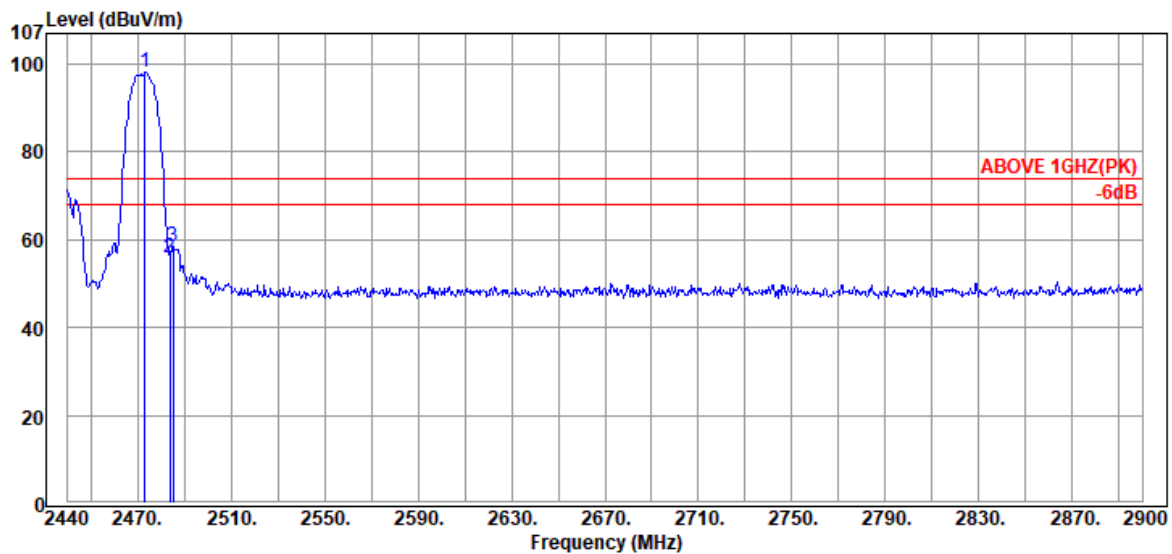

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.12	28.64	6.12	63.25	98.01	---	---	Peak
2483.70	28.70	6.13	20.94	55.77	74.00	18.23	Peak
2485.08	28.71	6.13	23.45	58.29	74.00	15.71	Peak

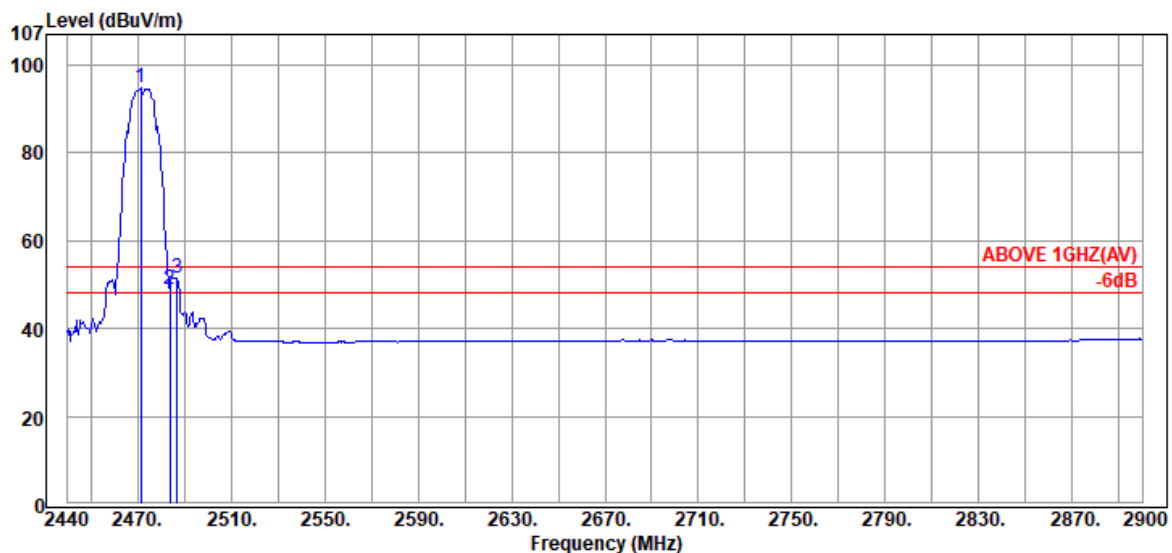

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.28	28.63	6.12	59.97	94.72	---	---	Average
2483.70	28.70	6.13	14.12	48.95	54.00	5.05	Average
2486.92	28.72	6.14	16.79	51.65	54.00	2.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

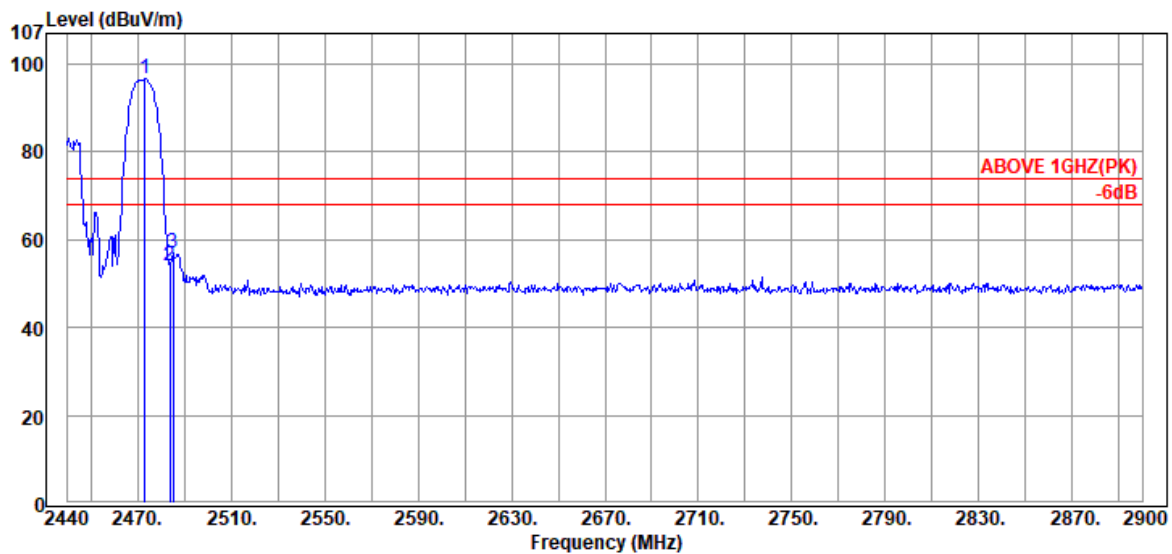

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.12	28.64	6.12	61.96	96.72	---	---	Peak
2483.70	28.70	6.13	19.23	54.06	74.00	19.94	Peak
2485.08	28.71	6.13	22.05	56.89	74.00	17.11	Peak

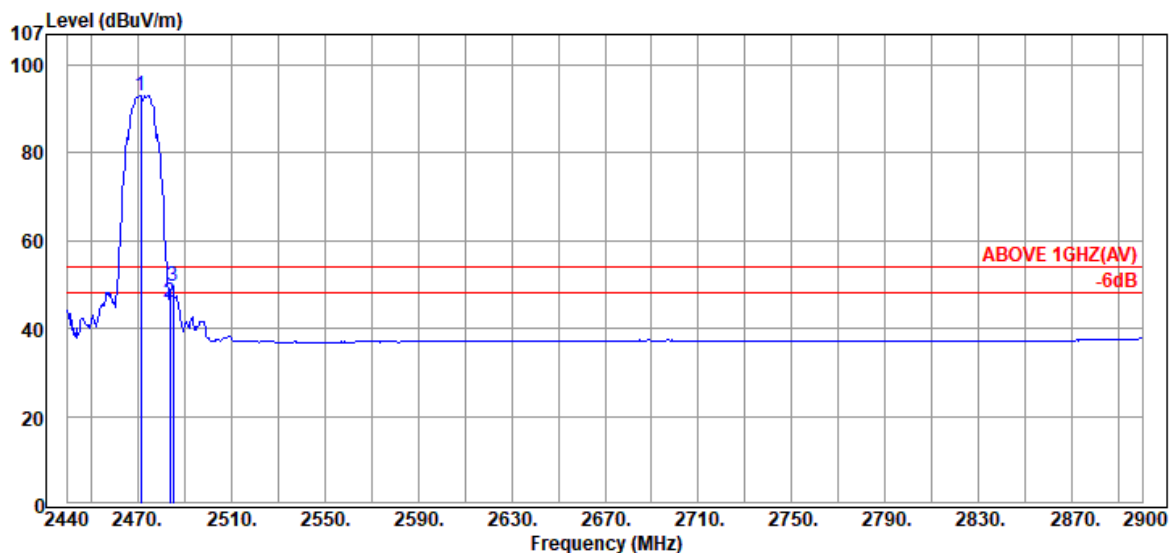

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.28	28.63	6.12	58.38	93.13	---	---	Average
2483.70	28.70	6.13	11.05	45.88	54.00	8.12	Average
2485.08	28.71	6.13	14.73	49.57	54.00	4.43	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

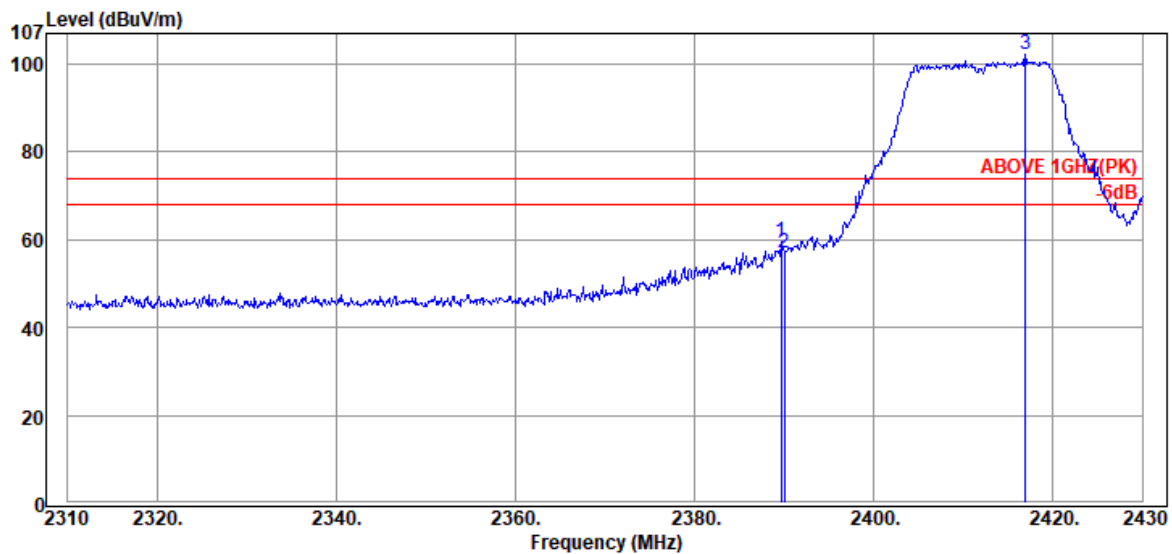

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	25.37	59.71	74.00	14.29	Peak
2390.04	28.32	6.03	22.70	57.05	74.00	16.95	Peak
@ 2416.92	28.43	6.06	67.73	102.22	---	---	Peak

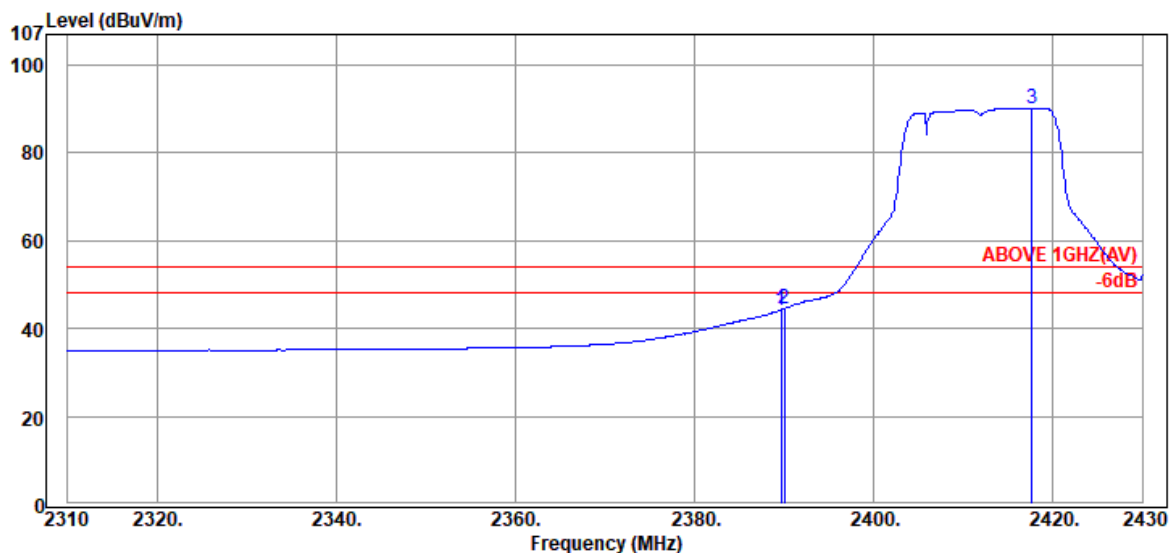

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	9.94	44.28	54.00	9.72	Average
2390.04	28.32	6.03	10.21	44.56	54.00	9.44	Average
@ 2417.64	28.44	6.06	55.74	90.24	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

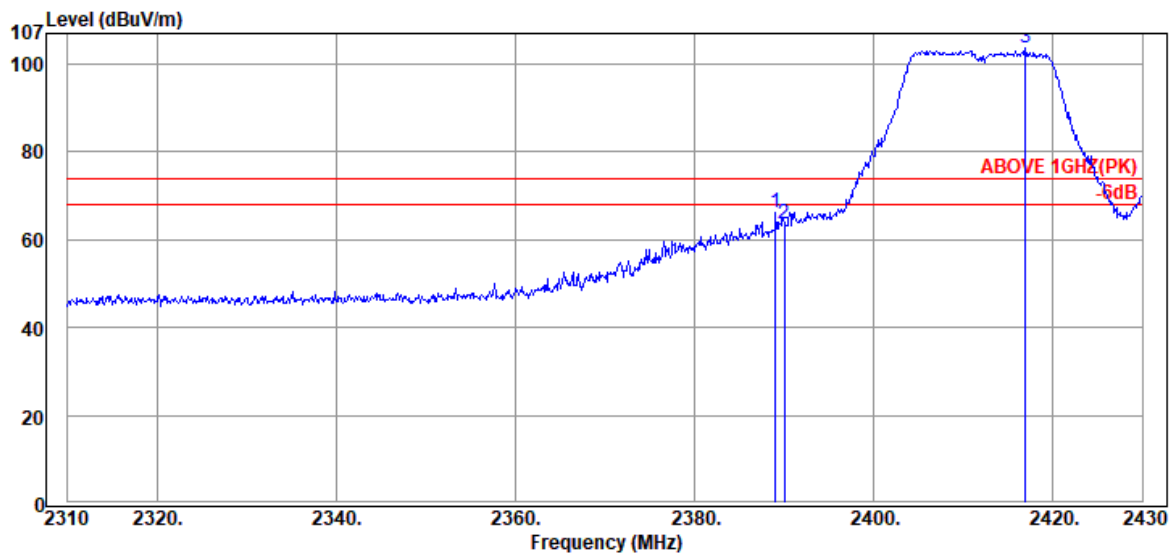

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.08	28.31	6.02	31.84	66.17	74.00	7.83	Peak
2390.04	28.32	6.03	29.09	63.44	74.00	10.56	Peak
@ 2416.92	28.43	6.06	69.35	103.84	---	---	Peak

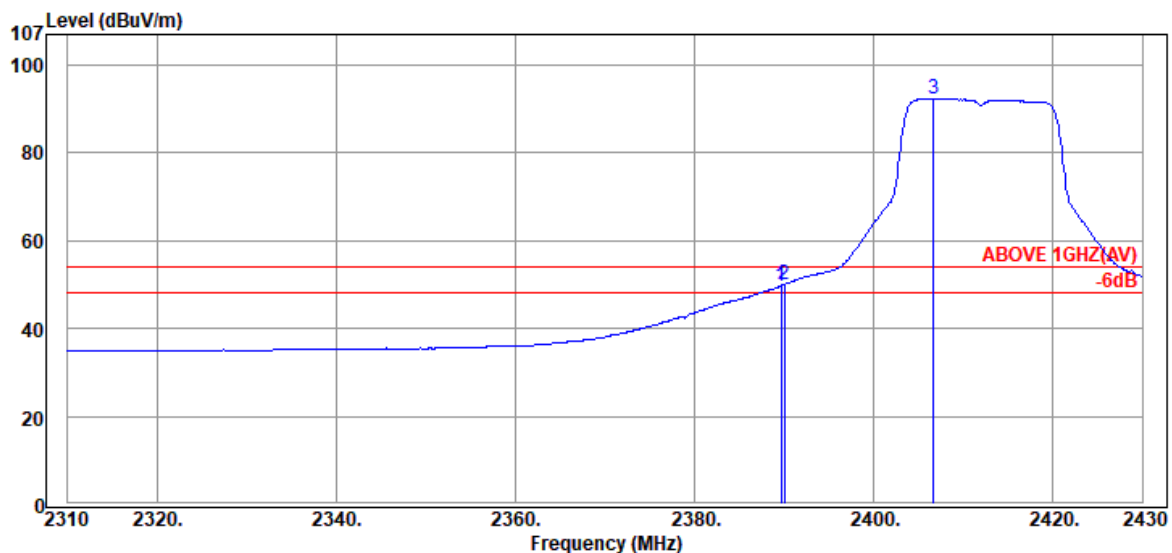

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	15.34	49.68	54.00	4.32	Average
2390.04	28.32	6.03	15.72	50.07	54.00	3.93	Average
@ 2406.72	28.41	6.04	57.84	92.29	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

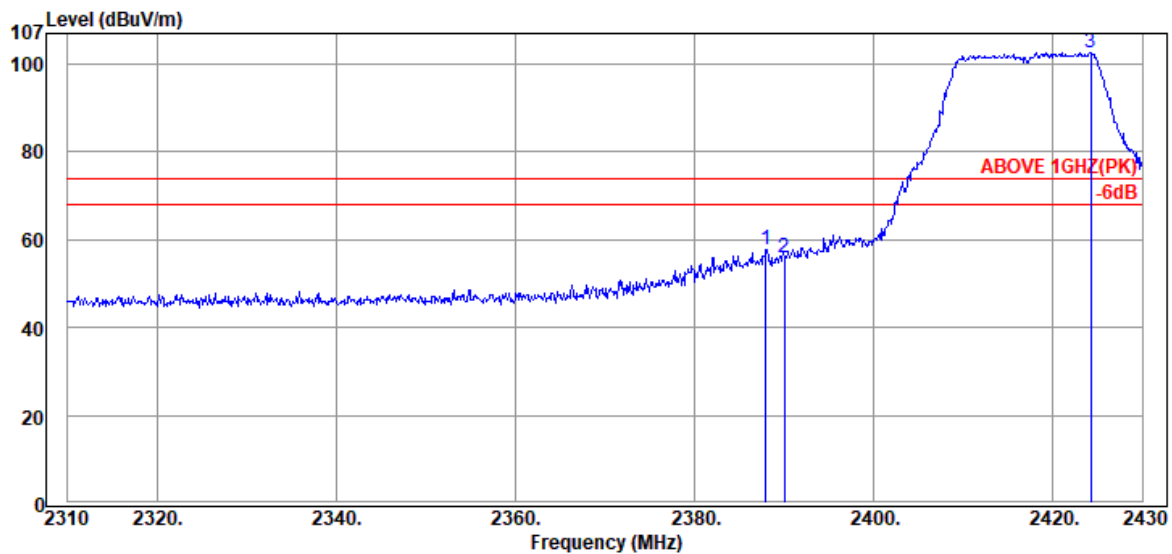

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.00	28.30	6.02	23.42	57.74	74.00	16.26	Peak
2390.04	28.32	6.03	21.65	56.00	74.00	18.00	Peak
@ 2424.24	28.45	6.06	68.26	102.77	---	---	Peak

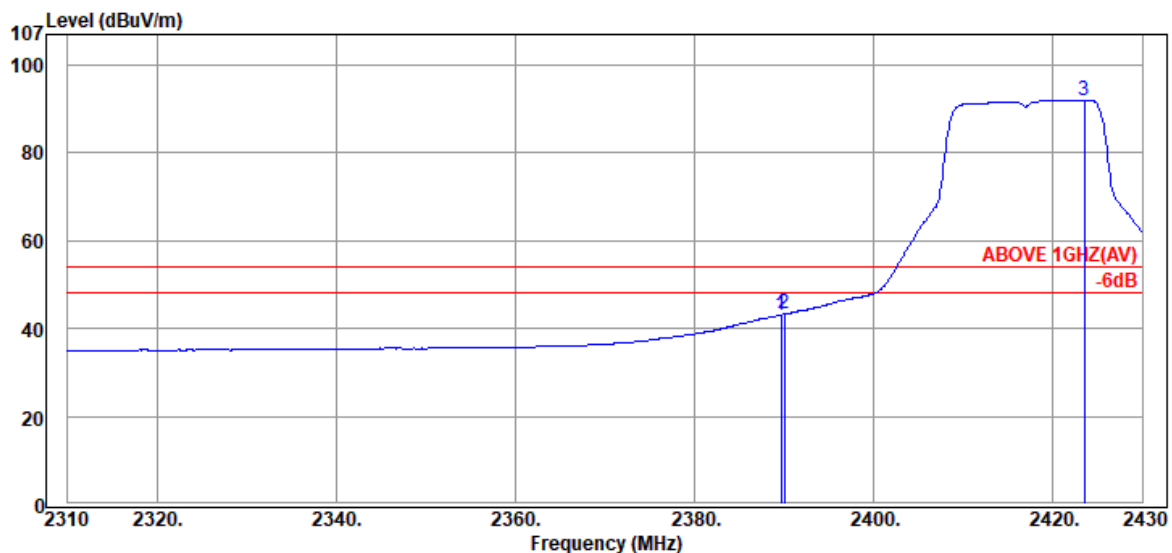


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	8.72	43.06	54.00	10.94	Average
2390.04	28.32	6.03	8.92	43.27	54.00	10.73	Average
@ 2423.52	28.45	6.06	57.54	92.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

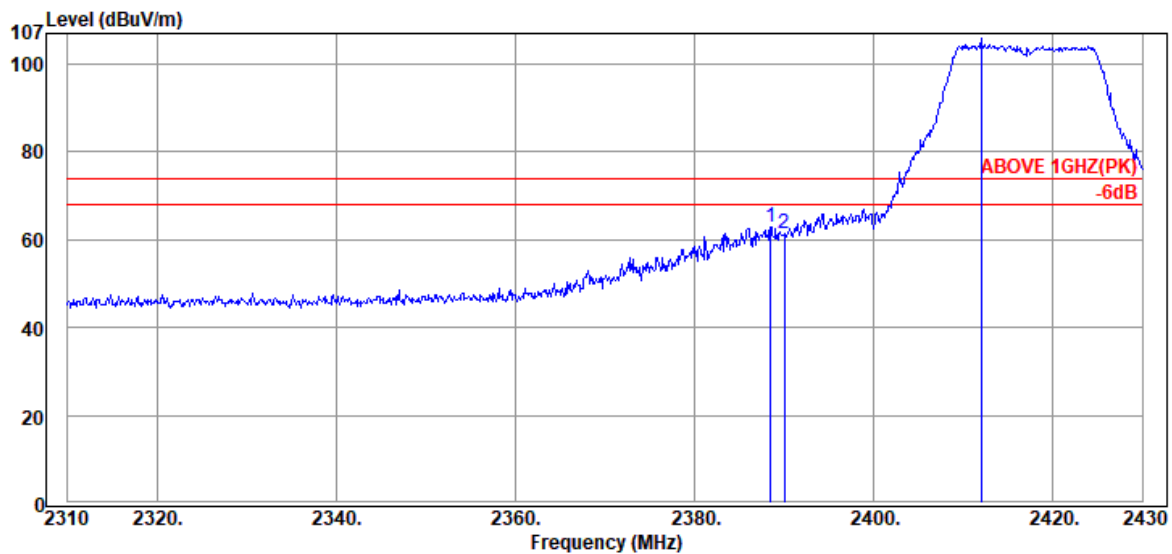

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.48	28.31	6.02	28.54	62.87	74.00	11.13	Peak
2390.04	28.32	6.03	27.04	61.39	74.00	12.61	Peak
@ 2412.00	28.42	6.05	71.45	105.92	---	---	Peak

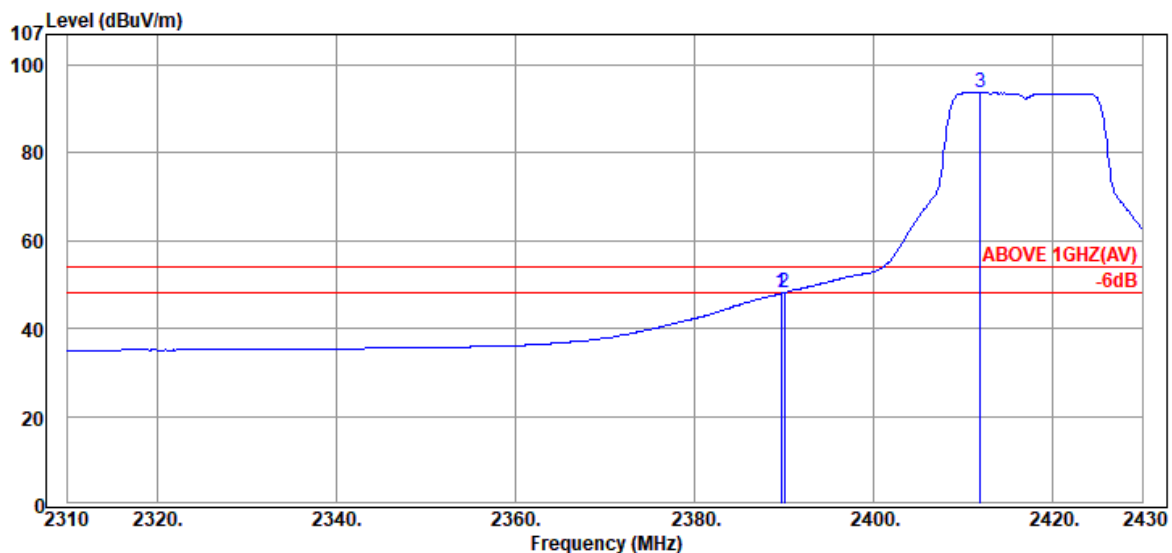

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	13.65	47.99	54.00	6.01	Average
2390.04	28.32	6.03	13.87	48.22	54.00	5.78	Average
@ 2411.88	28.42	6.05	59.22	93.69	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

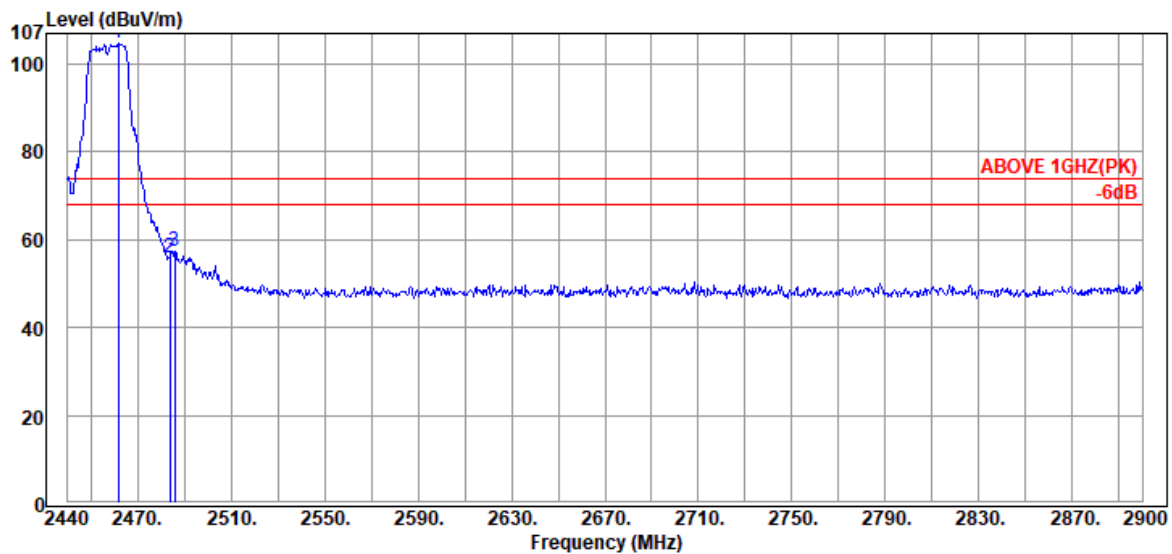

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.62	28.57	6.11	70.01	104.69	---	---	Peak
2483.70	28.70	6.13	21.09	55.92	74.00	18.08	Peak
2486.00	28.72	6.13	22.57	57.42	74.00	16.58	Peak

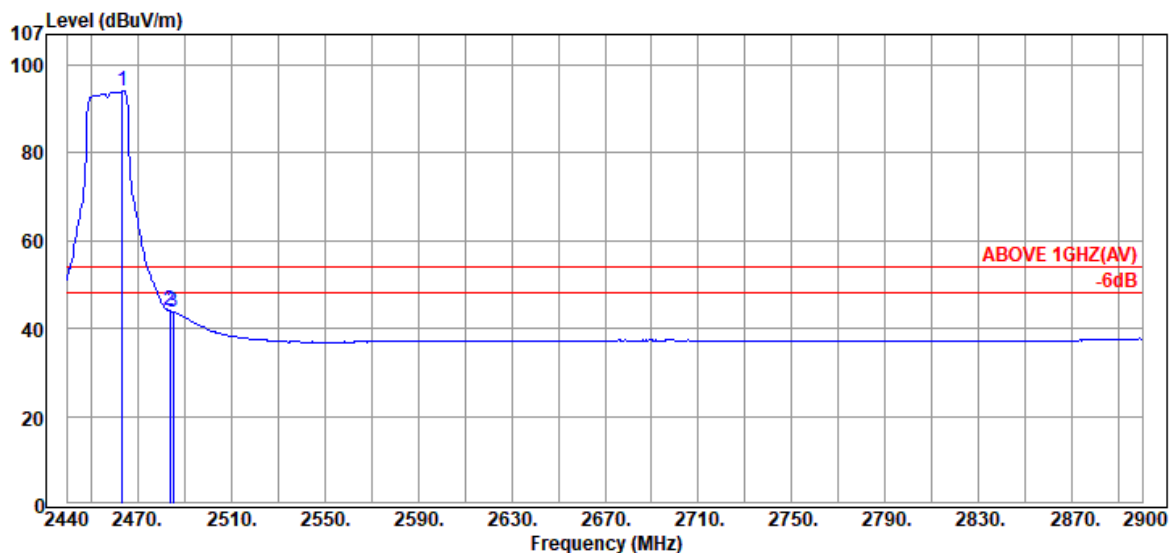

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.46	28.58	6.11	59.32	94.01	---	---	Average
2483.70	28.70	6.13	9.22	44.05	54.00	9.95	Average
2485.08	28.71	6.13	8.98	43.82	54.00	10.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

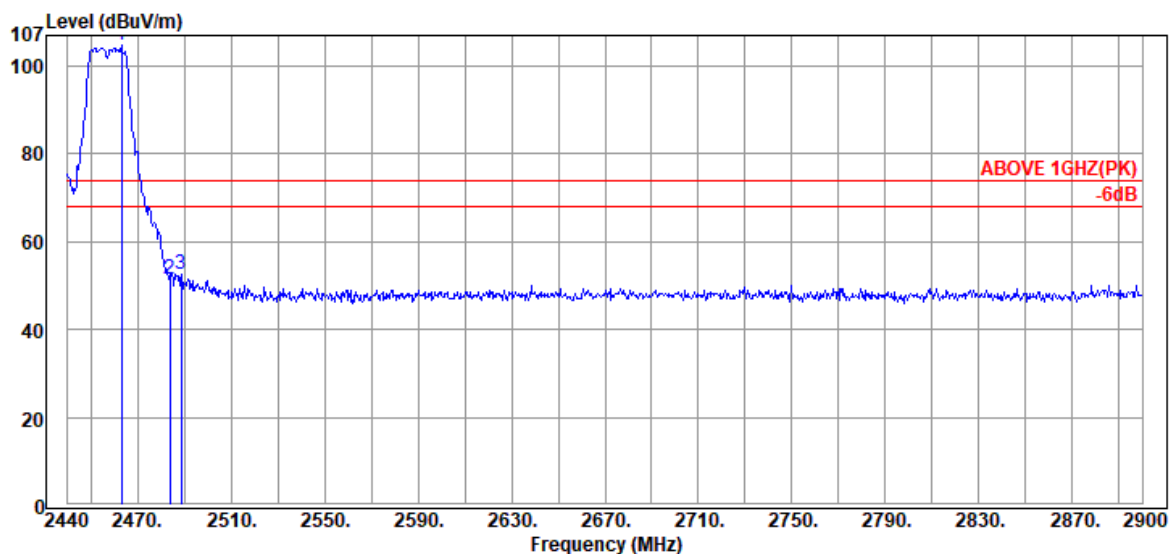

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.00	28.58	6.11	69.93	104.62	---	---	Peak
	2483.70	28.70	6.13	16.49	51.32	74.00	22.68	Peak
	2488.76	28.73	6.14	17.66	52.53	74.00	21.47	Peak

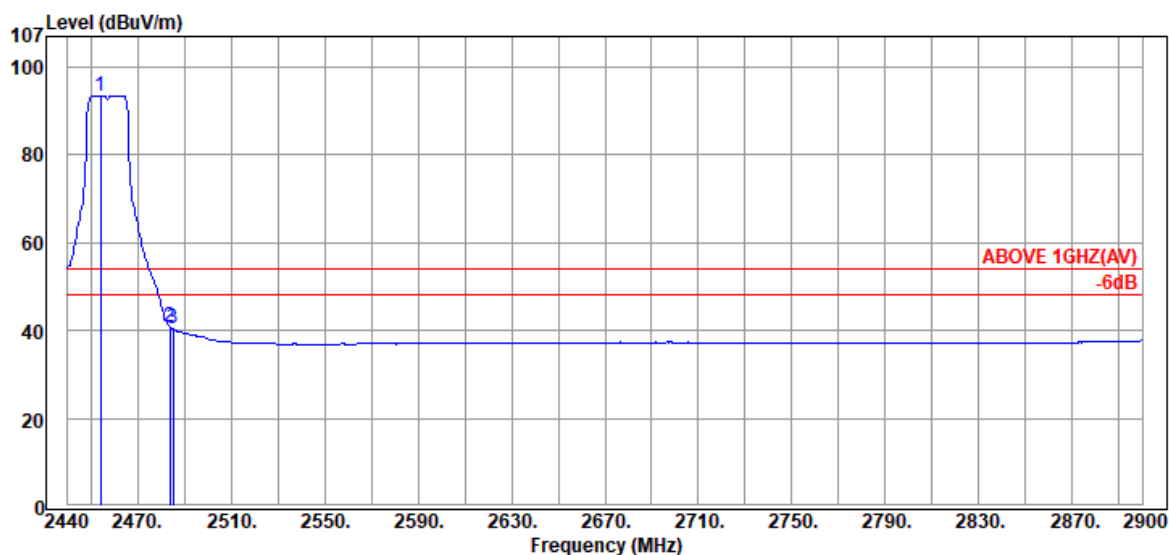

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.26	28.53	6.10	58.85	93.48	---	---	Average
	2483.70	28.70	6.13	6.10	40.93	54.00	13.07	Average
	2485.08	28.71	6.13	5.58	40.42	54.00	13.58	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

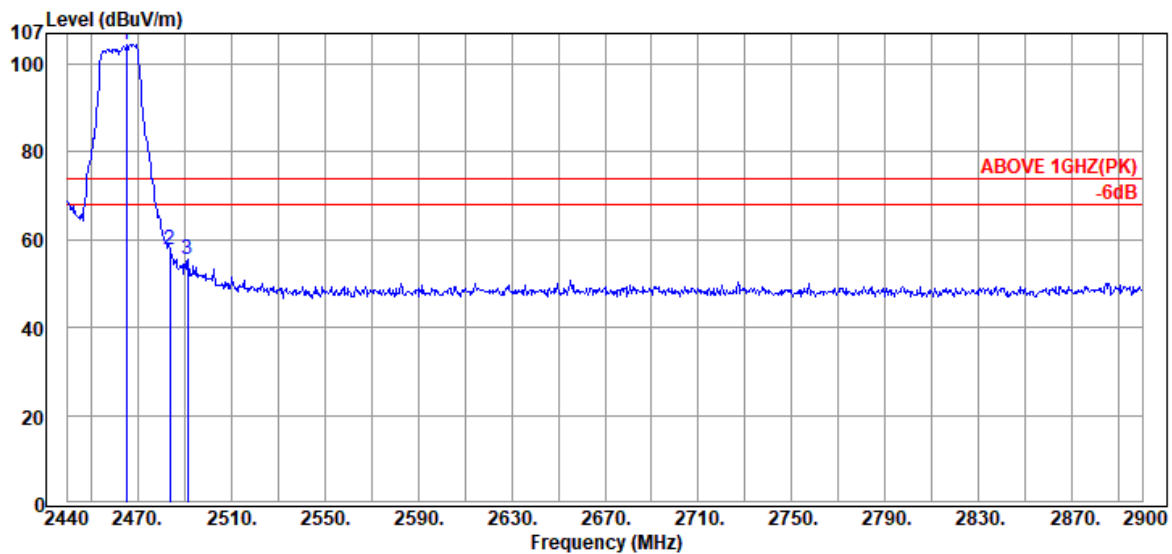

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.30	28.59	6.11	69.83	104.53	---	---	Peak
2483.70	28.70	6.13	22.98	57.81	74.00	16.19	Peak
2491.52	28.75	6.14	20.65	55.54	74.00	18.46	Peak

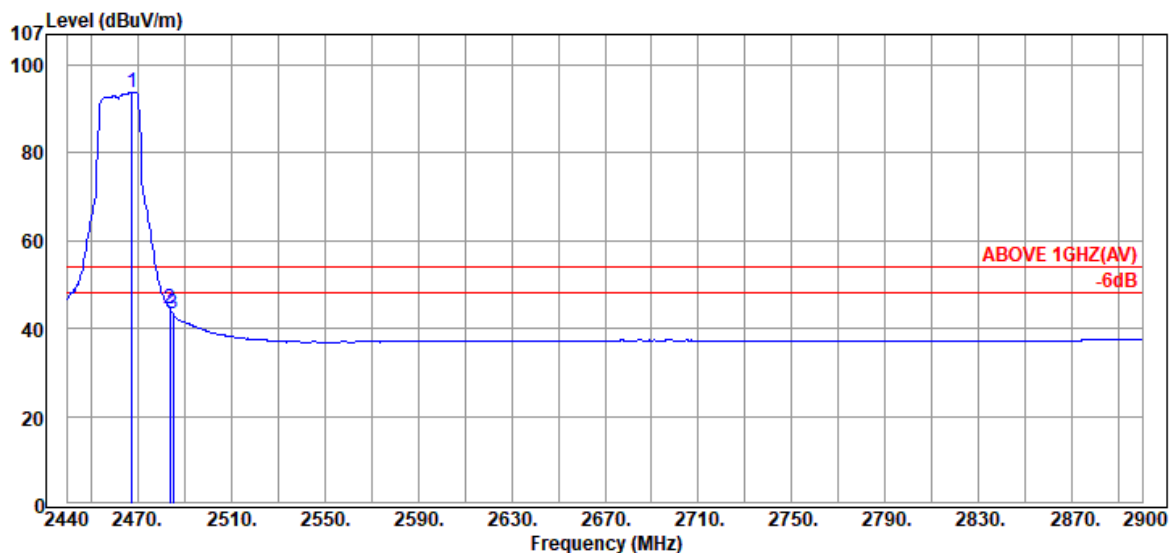

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.60	28.61	6.11	59.04	93.76	---	---	Average
2483.70	28.70	6.13	9.77	44.60	54.00	9.40	Average
2485.08	28.71	6.13	8.61	43.45	54.00	10.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

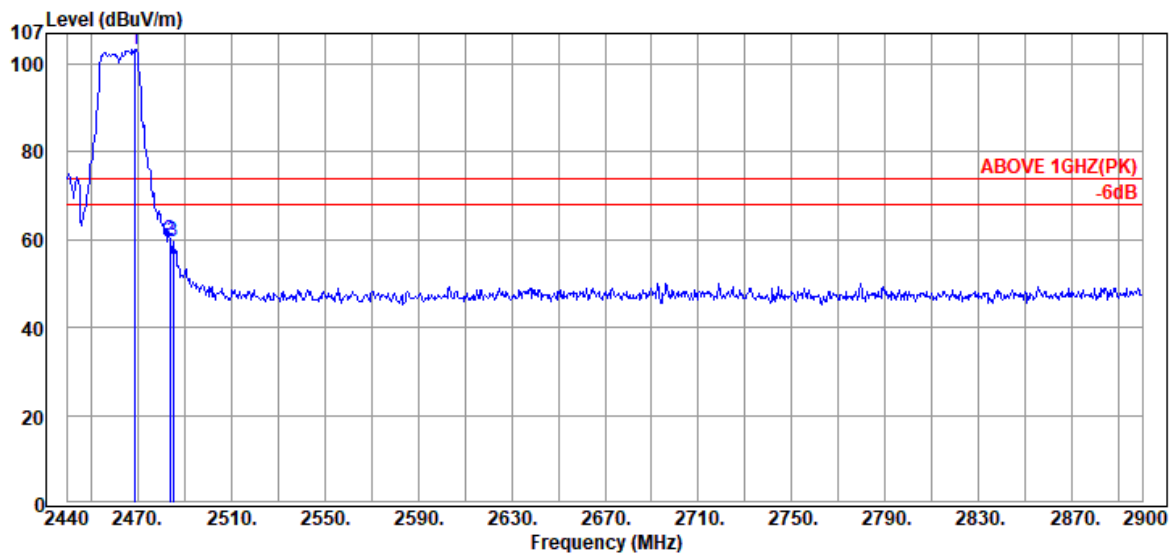

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.98	28.61	6.12	68.69	103.42	---	---	Peak
2483.70	28.70	6.13	25.07	59.90	74.00	14.10	Peak
2485.08	28.71	6.13	24.68	59.52	74.00	14.48	Peak

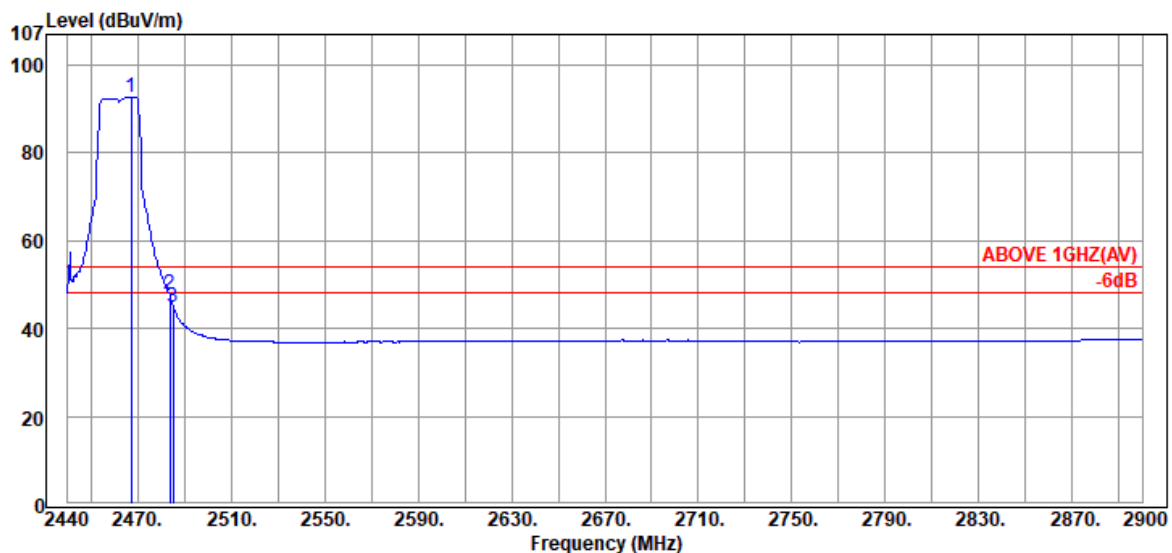

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.14	28.60	6.11	58.01	92.72	---	---	Average
2483.70	28.70	6.13	12.81	47.64	54.00	6.36	Average
2485.08	28.71	6.13	9.84	44.68	54.00	9.32	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

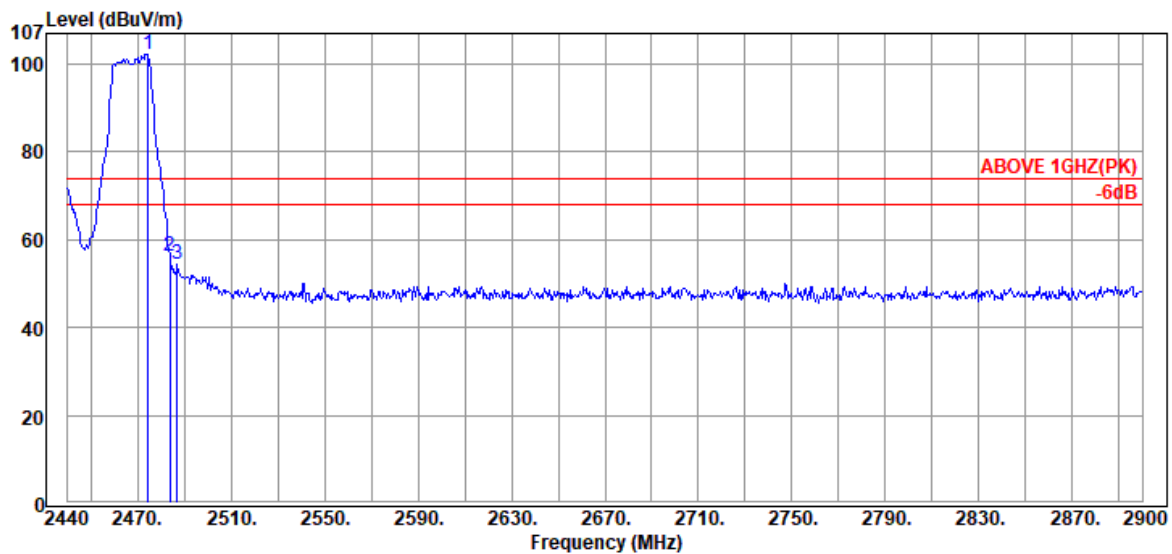

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.50	28.65	6.12	67.46	102.23	---	---	Peak
2483.70	28.70	6.13	21.47	56.30	74.00	17.70	Peak
2486.92	28.72	6.14	19.60	54.46	74.00	19.54	Peak

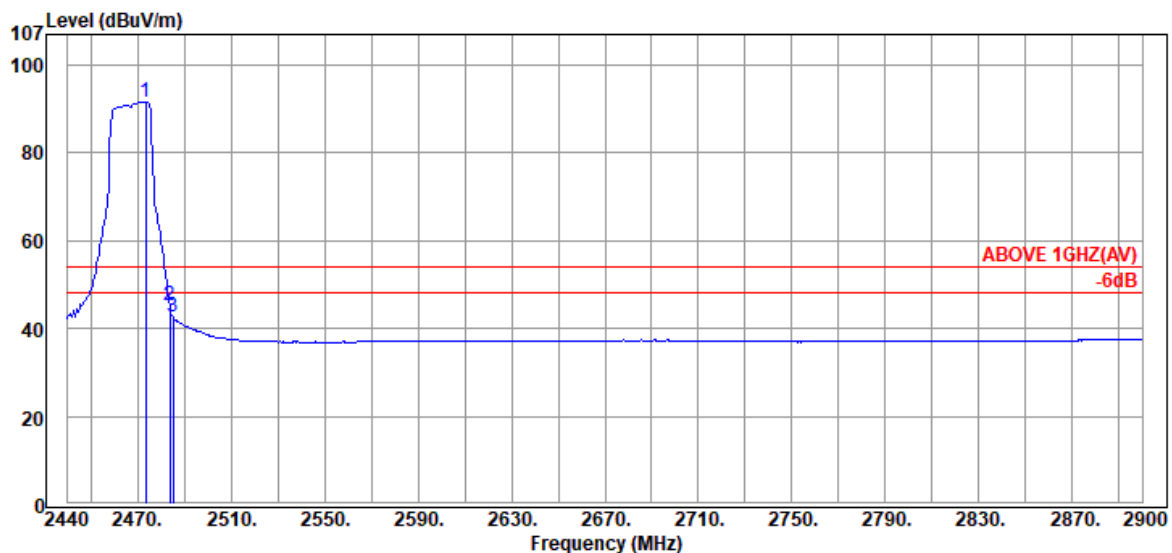

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.58	28.64	6.12	56.94	91.70	---	---	Average
2483.70	28.70	6.13	10.23	45.06	54.00	8.94	Average
2485.08	28.71	6.13	7.70	42.54	54.00	11.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

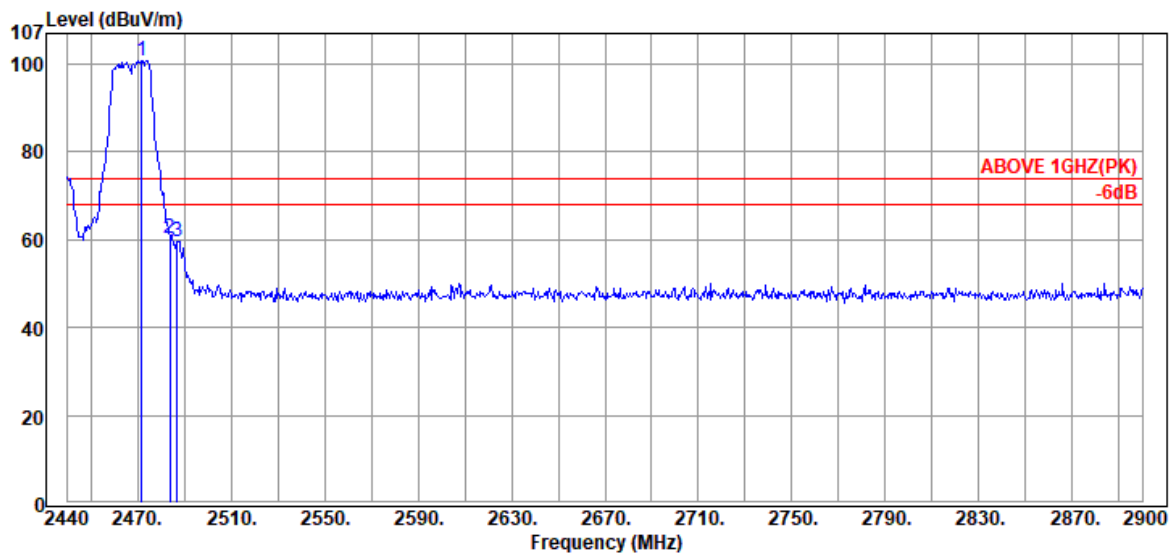

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.74	28.63	6.12	66.03	100.78	---	---	Peak
2483.70	28.70	6.13	25.64	60.47	74.00	13.53	Peak
2486.92	28.72	6.14	24.87	59.73	74.00	14.27	Peak

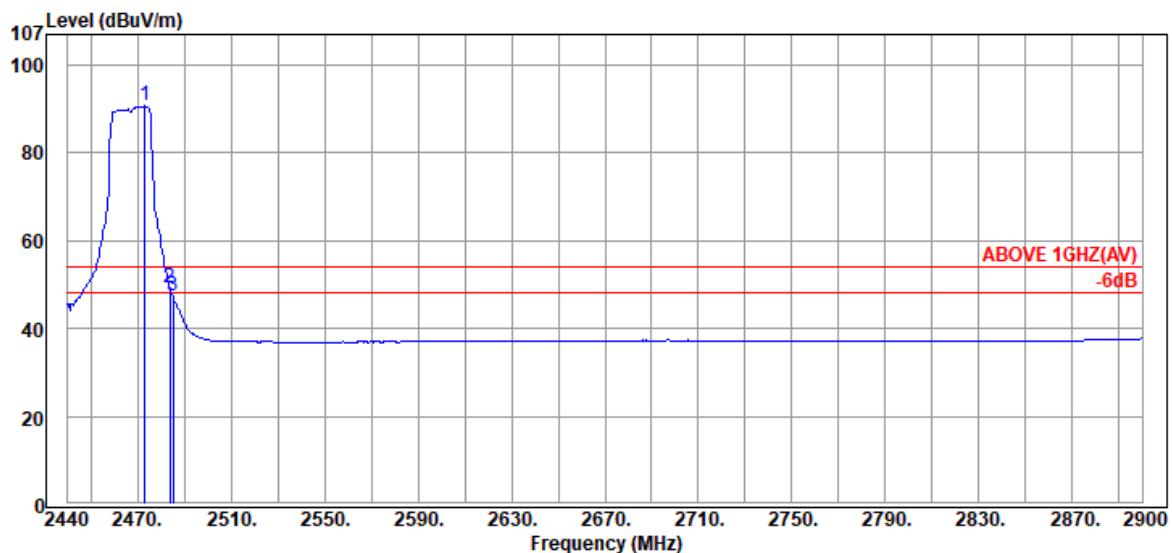

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.12	28.64	6.12	55.88	90.64	---	---	Average
2483.70	28.70	6.13	14.46	49.29	54.00	4.71	Average
2485.08	28.71	6.13	12.54	47.38	54.00	6.62	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

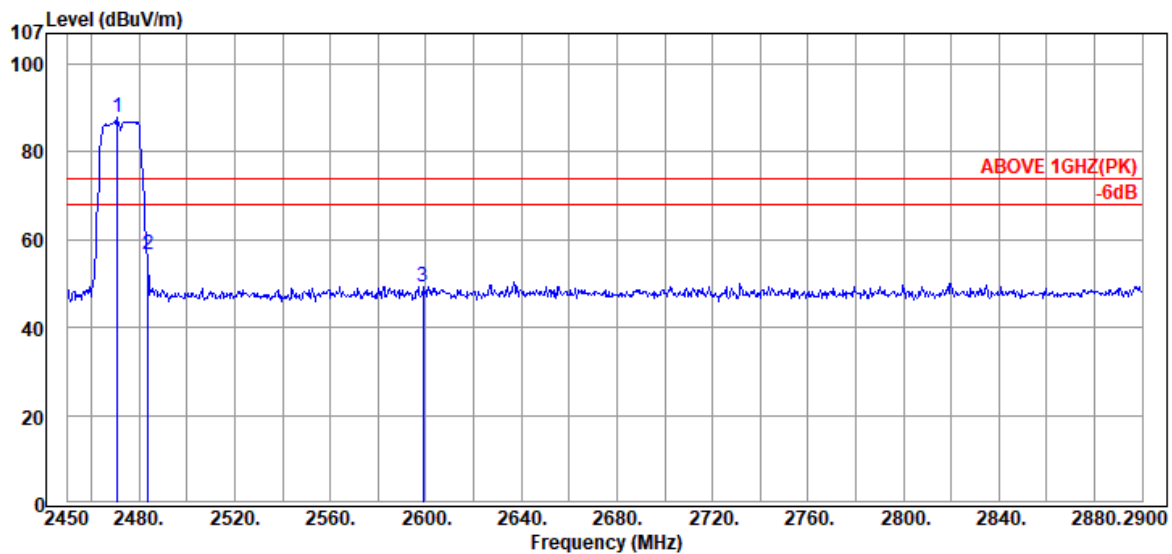

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.82	28.62	6.12	53.00	87.74	---	---	Peak
2483.70	28.70	6.13	21.86	56.69	74.00	17.31	Peak
2598.70	29.09	6.28	13.99	49.36	74.00	24.64	Peak

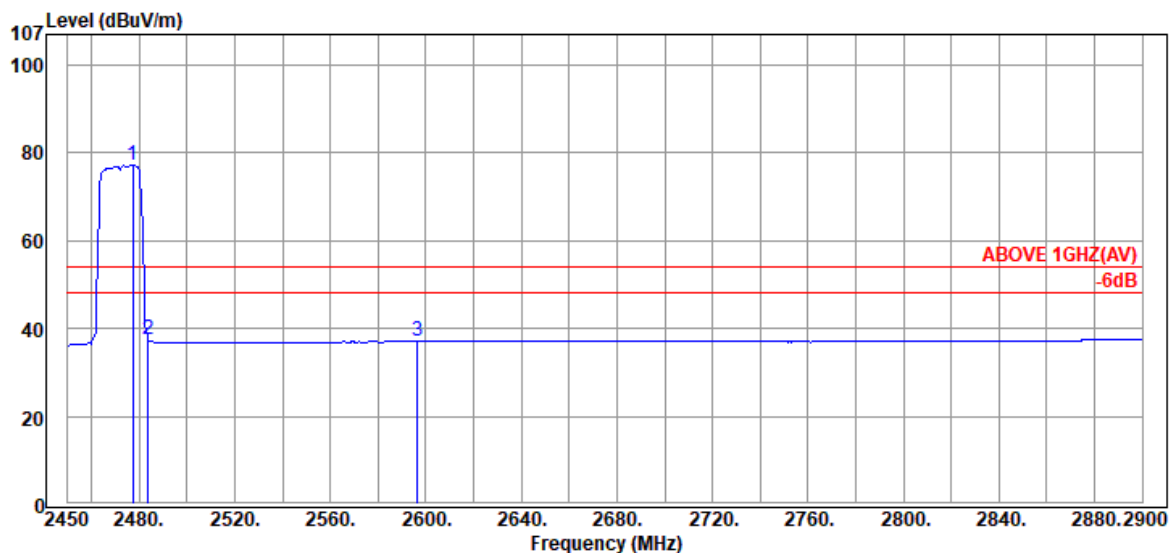


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.26	28.66	6.12	42.47	77.25	---	---	Average
2483.70	28.70	6.13	2.53	37.36	54.00	16.64	Average
2596.40	29.09	6.28	1.83	37.20	54.00	16.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

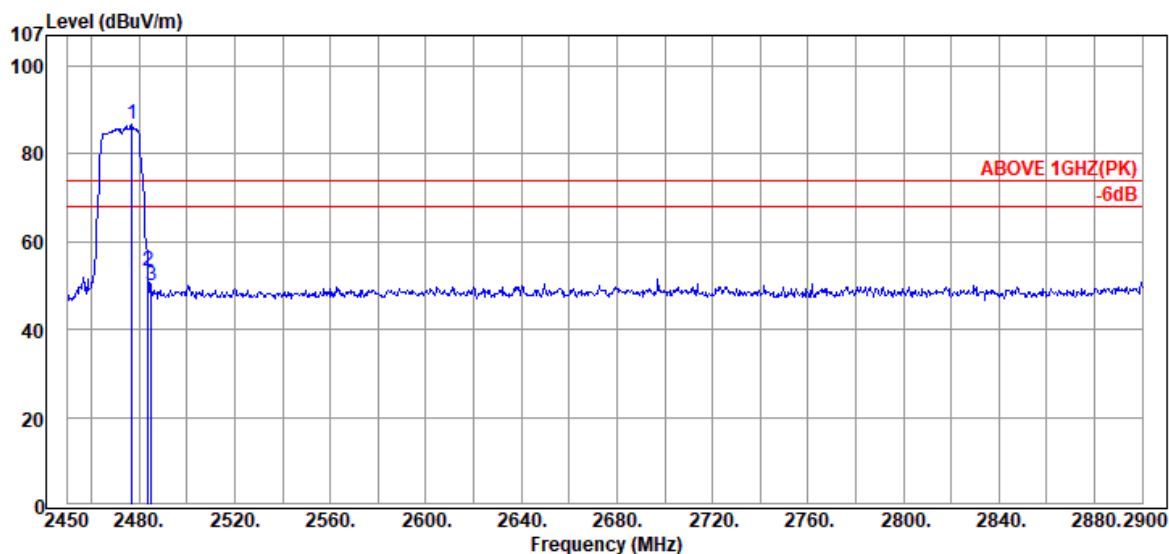

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.80	28.66	6.12	51.98	86.76	---	---	Peak
	2483.70	28.70	6.13	18.45	53.28	74.00	20.72	Peak
	2485.08	28.71	6.13	15.17	50.01	74.00	23.99	Peak

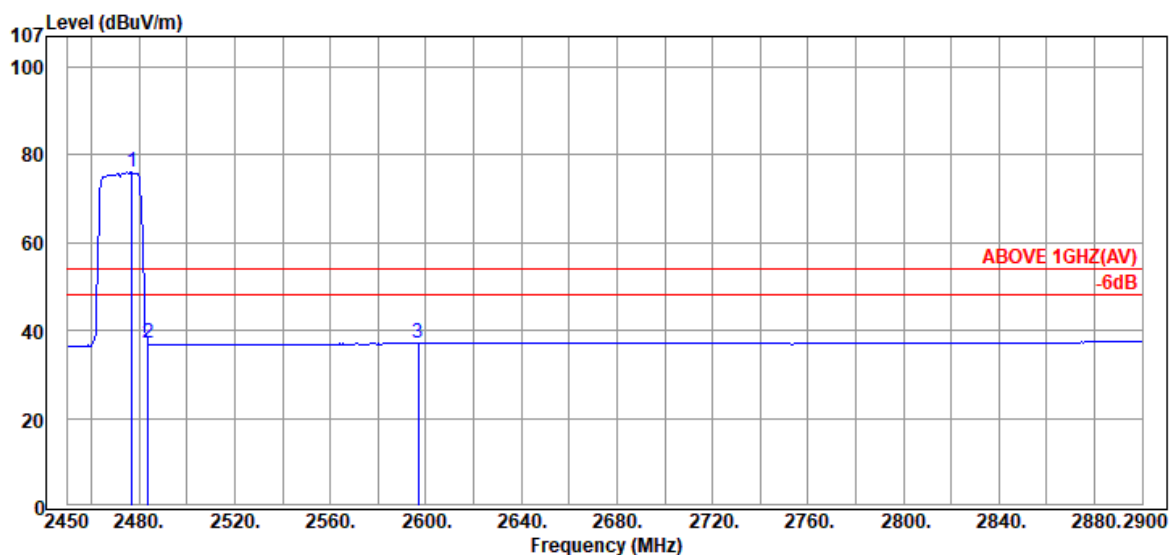

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.80	28.66	6.12	41.21	75.99	---	---	Average
	2483.70	28.70	6.13	2.32	37.15	54.00	16.85	Average
	2596.86	29.09	6.28	1.79	37.16	54.00	16.84	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

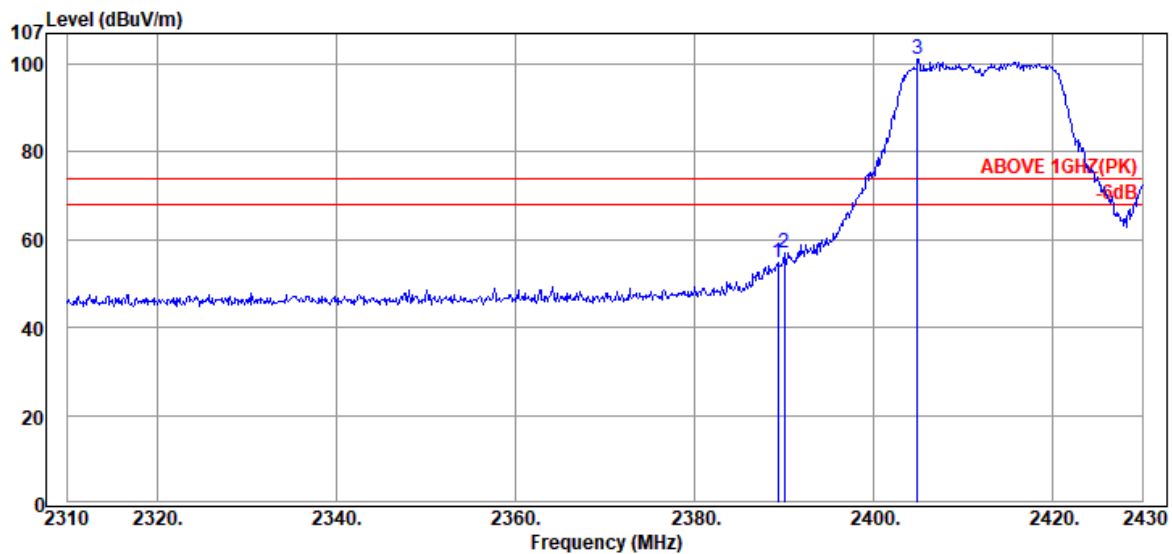

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	28.31	6.02	20.64	54.97	74.00	19.03	Peak
2390.04	28.32	6.03	22.60	56.95	74.00	17.05	Peak
@ 2404.92	28.41	6.04	66.58	101.03	---	---	Peak

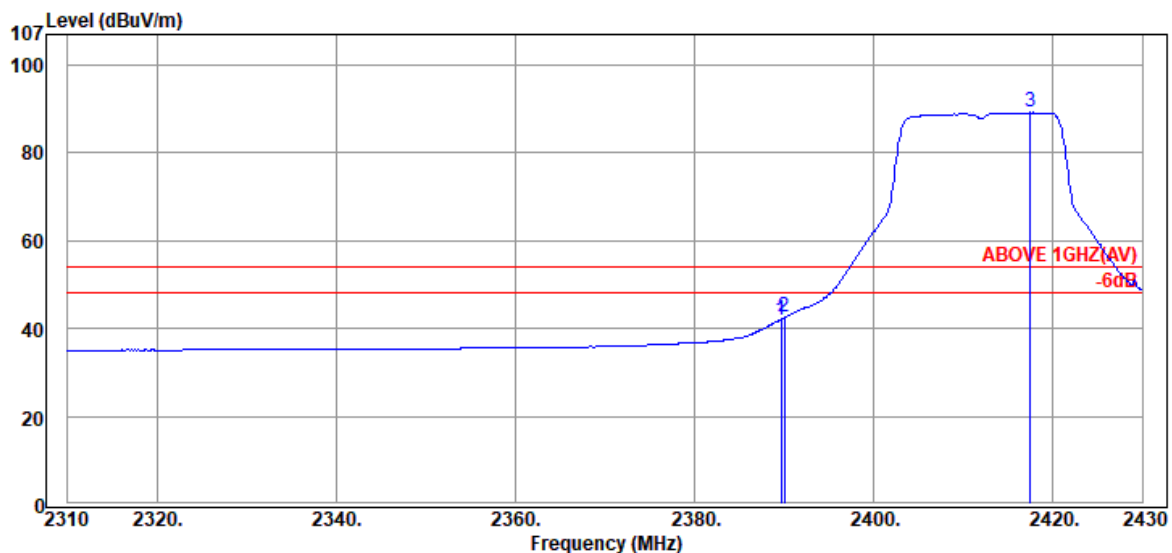

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	7.73	42.07	54.00	11.93	Average
2390.04	28.32	6.03	8.13	42.48	54.00	11.52	Average
@ 2417.52	28.44	6.06	54.68	89.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

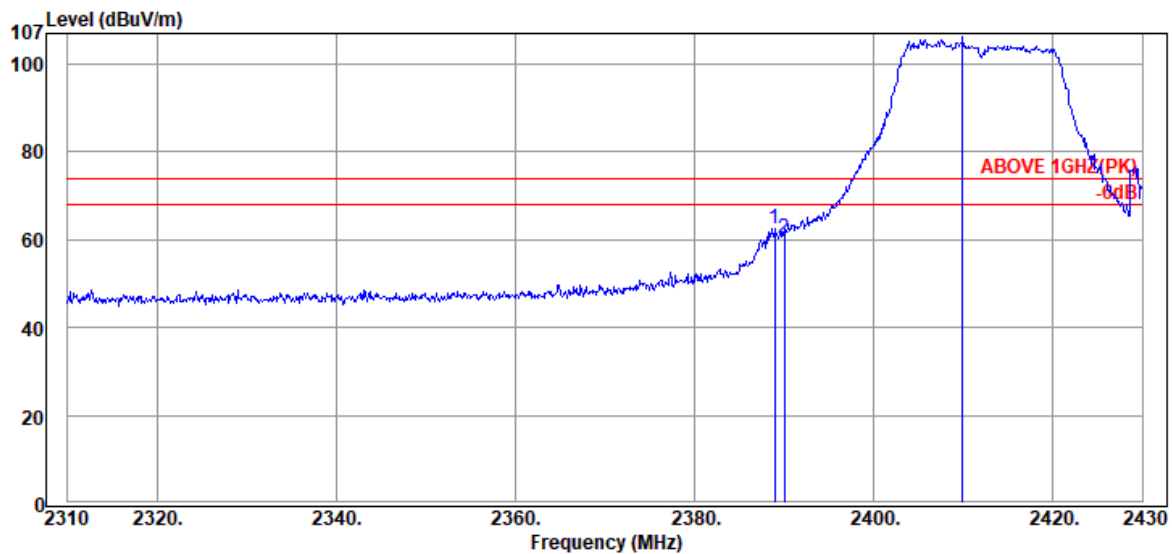

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.96	28.31	6.02	28.17	62.50	74.00	11.50	Peak
2390.04	28.32	6.03	25.95	60.30	74.00	13.70	Peak
@ 2409.96	28.42	6.05	71.75	106.22	---	---	Peak

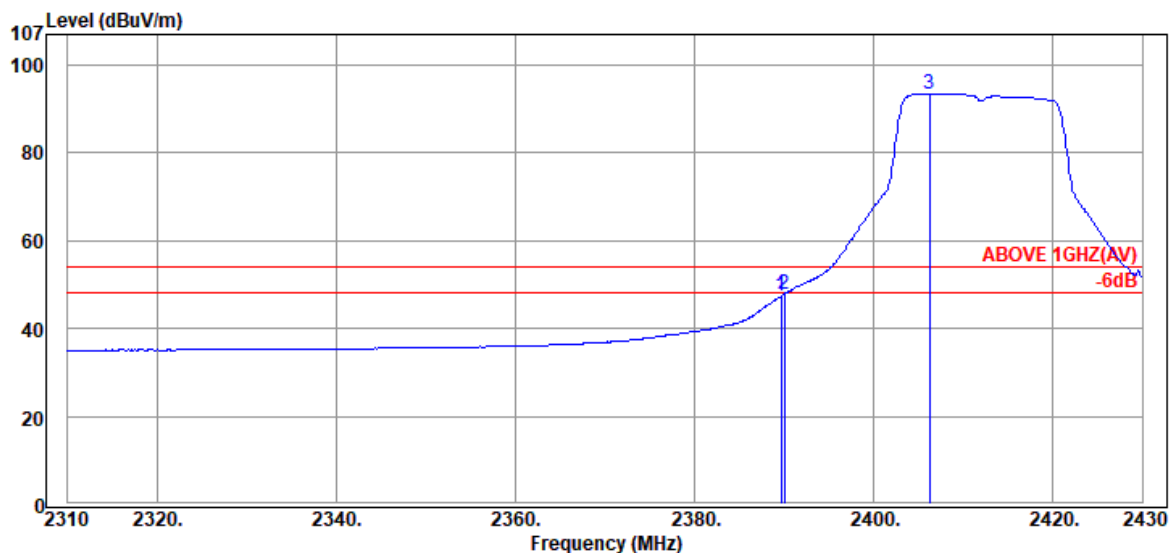

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	13.07	47.41	54.00	6.59	Average
2390.04	28.32	6.03	13.53	47.88	54.00	6.12	Average
@ 2406.24	28.41	6.04	59.03	93.48	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

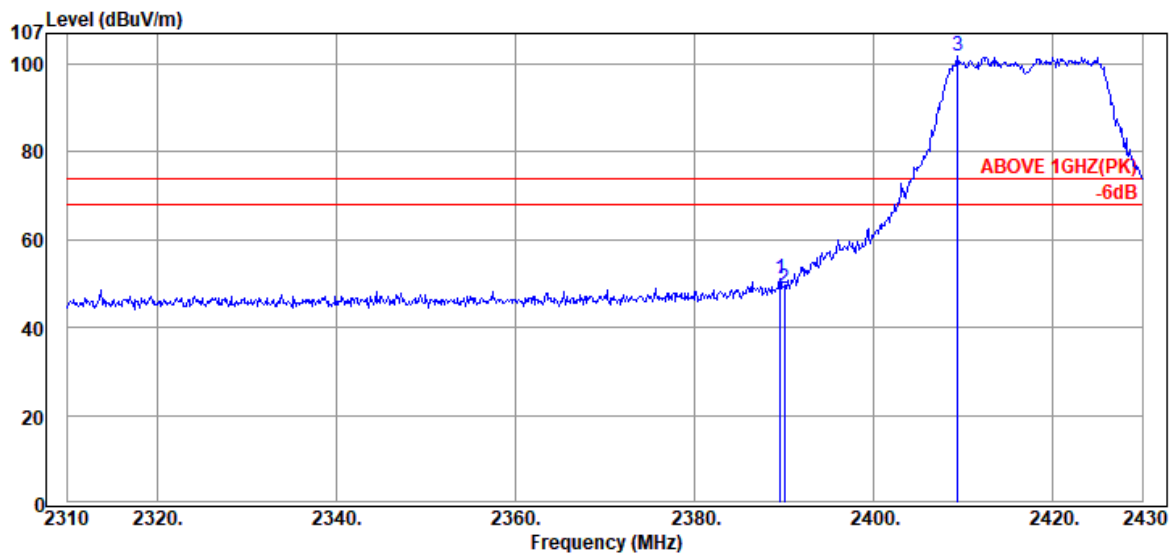

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	16.60	50.94	74.00	23.06	Peak
2390.04	28.32	6.03	14.43	48.78	74.00	25.22	Peak
@ 2409.36	28.42	6.05	67.22	101.69	---	---	Peak

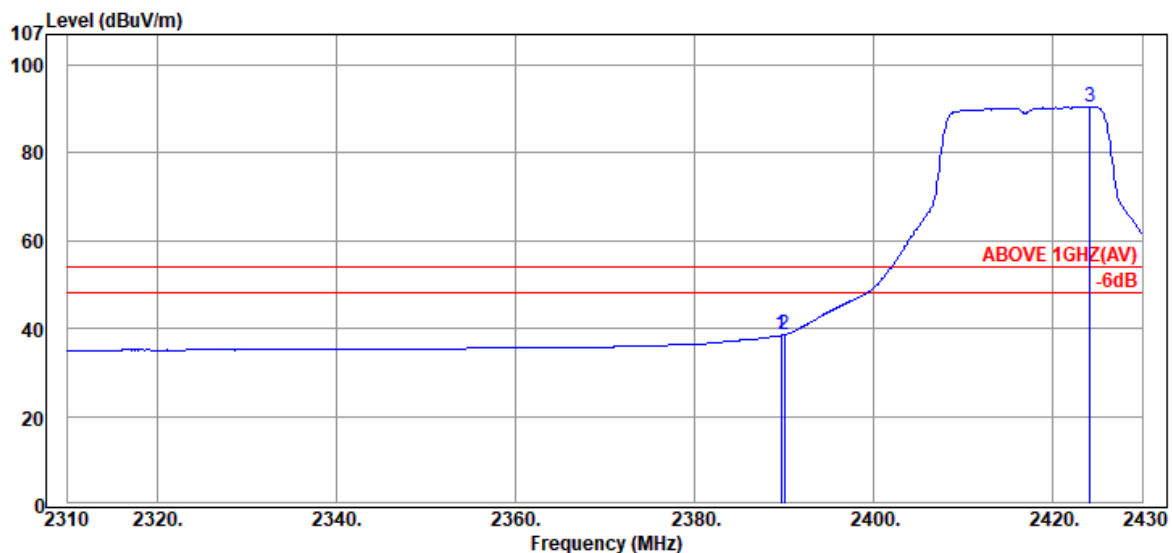

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	4.13	38.47	54.00	15.53	Average
2390.04	28.32	6.03	4.26	38.61	54.00	15.39	Average
@ 2424.12	28.45	6.06	55.93	90.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

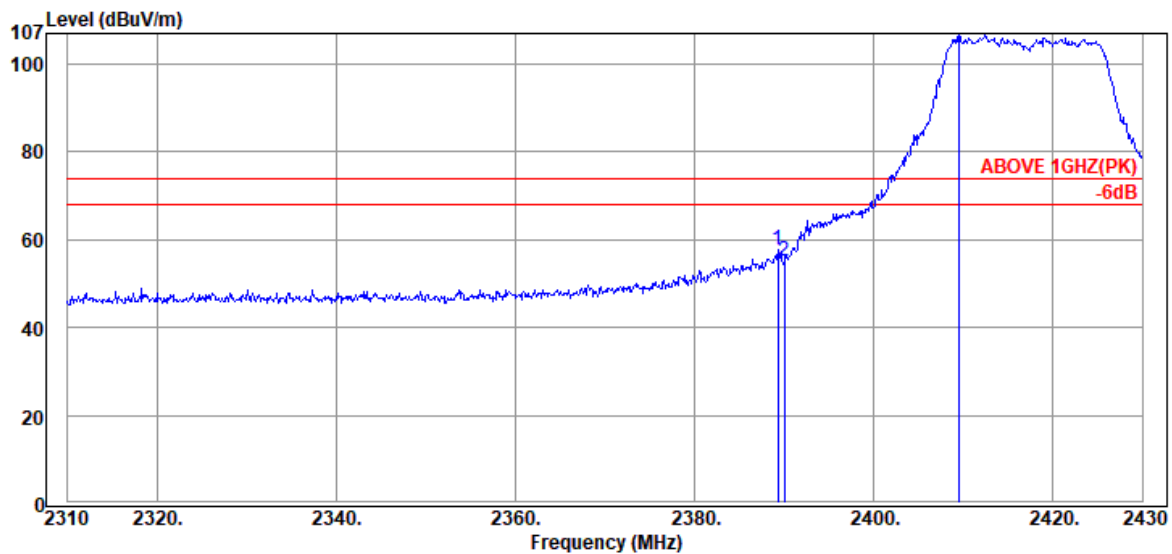

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	28.31	6.02	23.31	57.64	74.00	16.36	Peak
2390.04	28.32	6.03	20.75	55.10	74.00	18.90	Peak
@ 2409.60	28.42	6.05	73.13	107.60	---	---	Peak

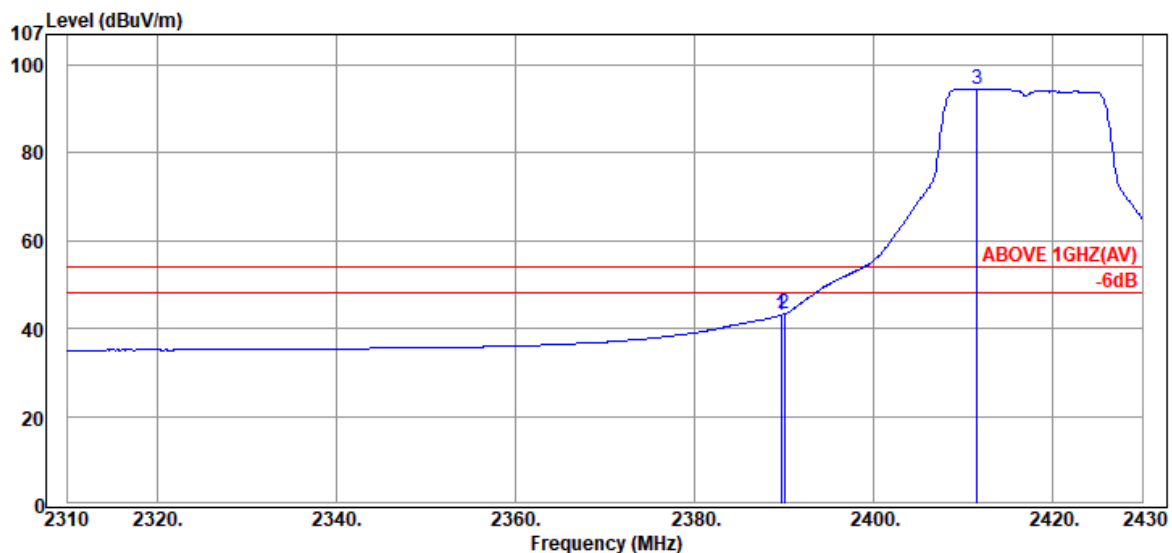

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	8.76	43.10	54.00	10.90	Average
2390.04	28.32	6.03	8.99	43.34	54.00	10.66	Average
@ 2411.52	28.42	6.05	60.13	94.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

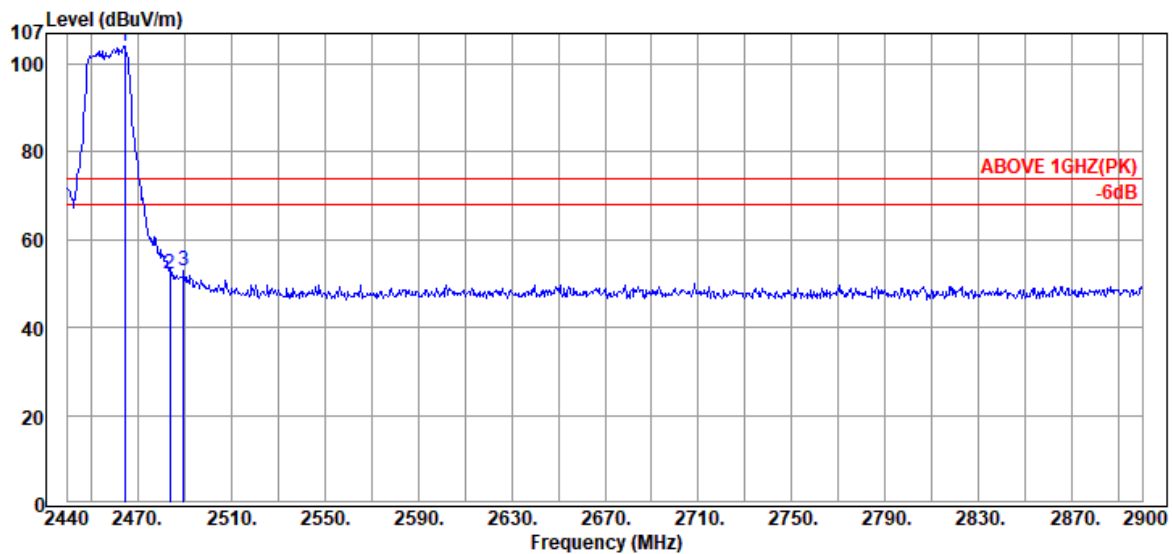

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.38	28.59	6.11	69.31	104.01	---	---	Peak
2483.70	28.70	6.13	17.23	52.06	74.00	21.94	Peak
2489.68	28.74	6.14	17.92	52.80	74.00	21.20	Peak

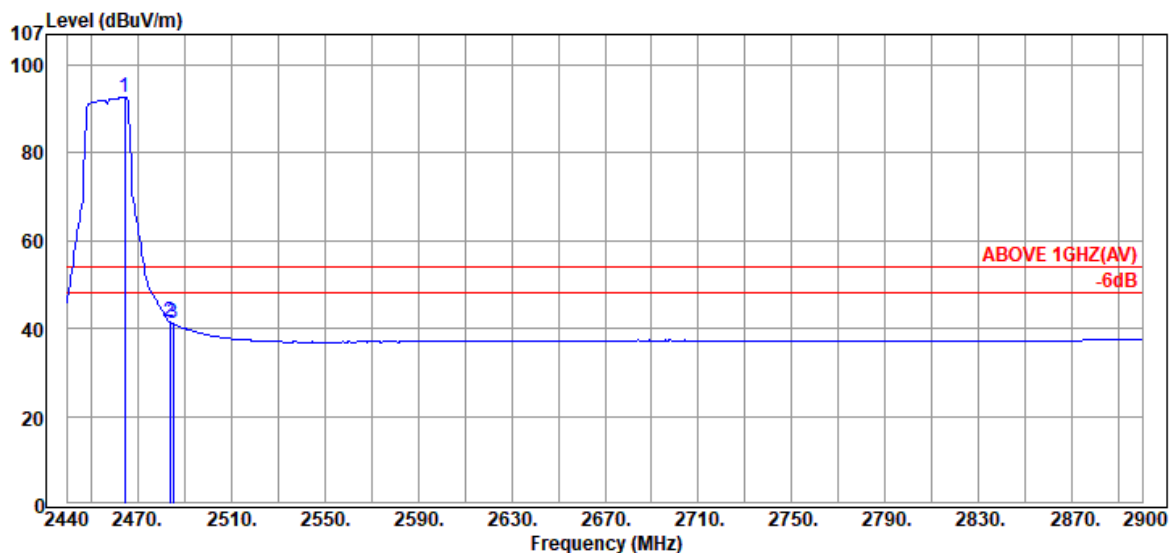

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.38	28.59	6.11	58.08	92.78	---	---	Average
2483.70	28.70	6.13	6.62	41.45	54.00	12.55	Average
2485.08	28.71	6.13	6.28	41.12	54.00	12.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

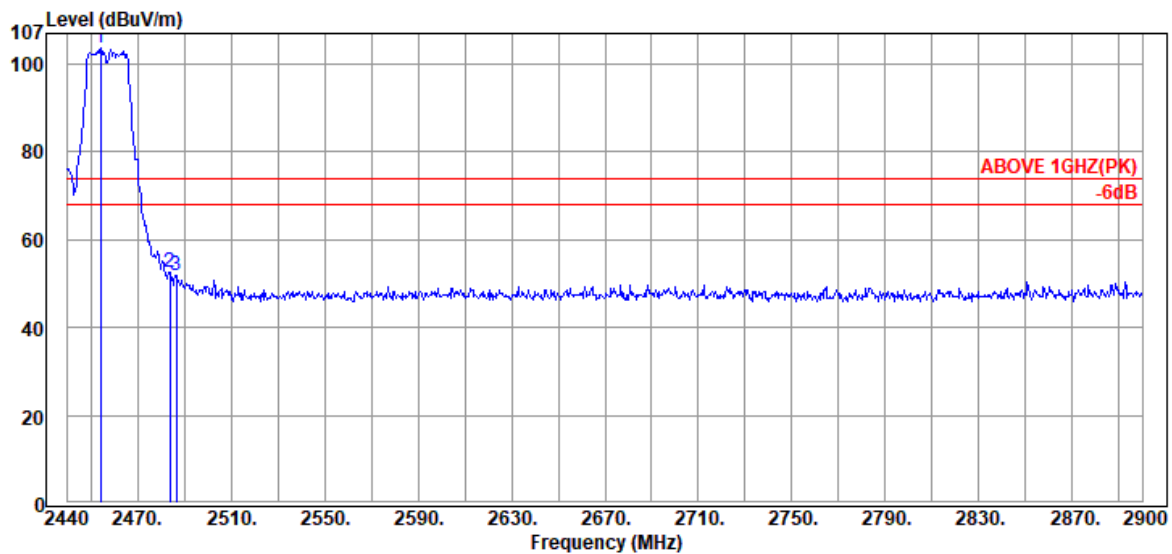

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.26	28.53	6.10	69.02	103.65	---	---	Peak
	2483.70	28.70	6.13	17.64	52.47	74.00	21.53	Peak
	2486.46	28.72	6.13	17.15	52.00	74.00	22.00	Peak

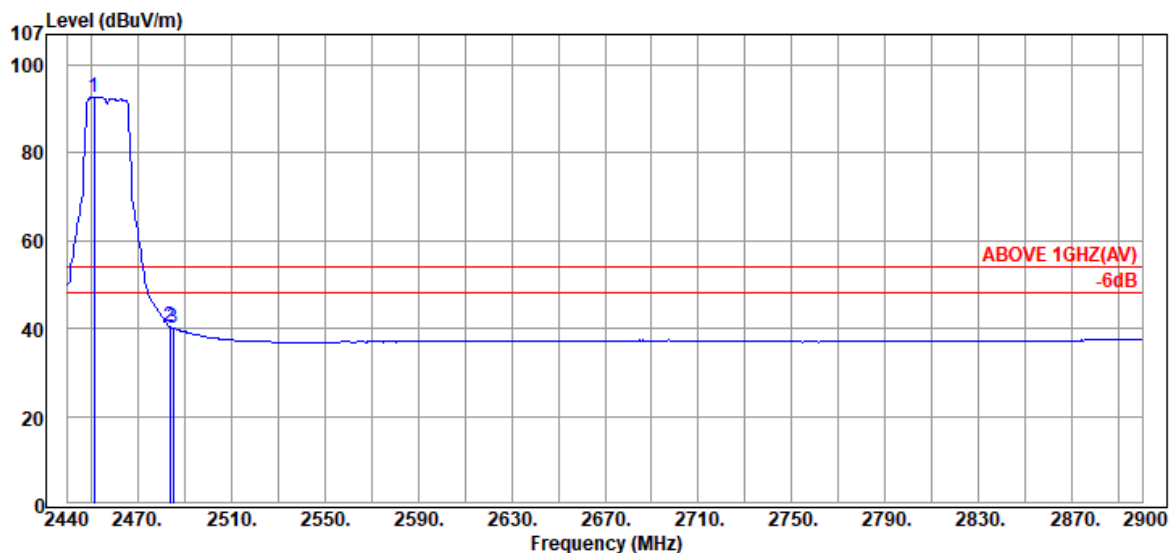

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2451.50	28.51	6.10	58.05	92.66	---	---	Average
	2483.70	28.70	6.13	5.58	40.41	54.00	13.59	Average
	2485.08	28.71	6.13	5.25	40.09	54.00	13.91	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

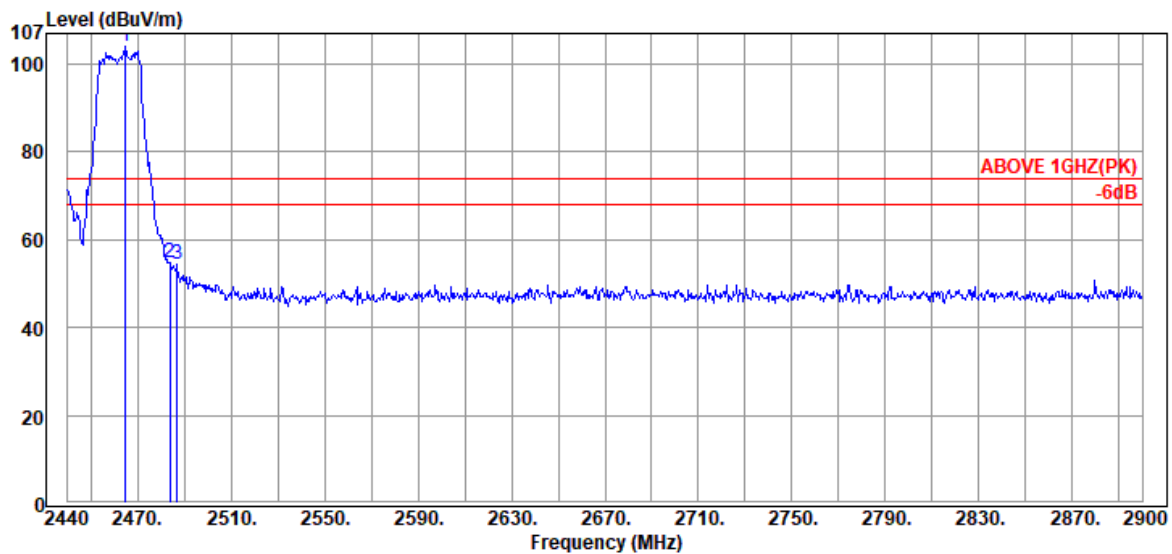

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.84	28.59	6.11	69.53	104.23	---	---	Peak
2483.70	28.70	6.13	20.04	54.87	74.00	19.13	Peak
2486.92	28.72	6.14	19.74	54.60	74.00	19.40	Peak

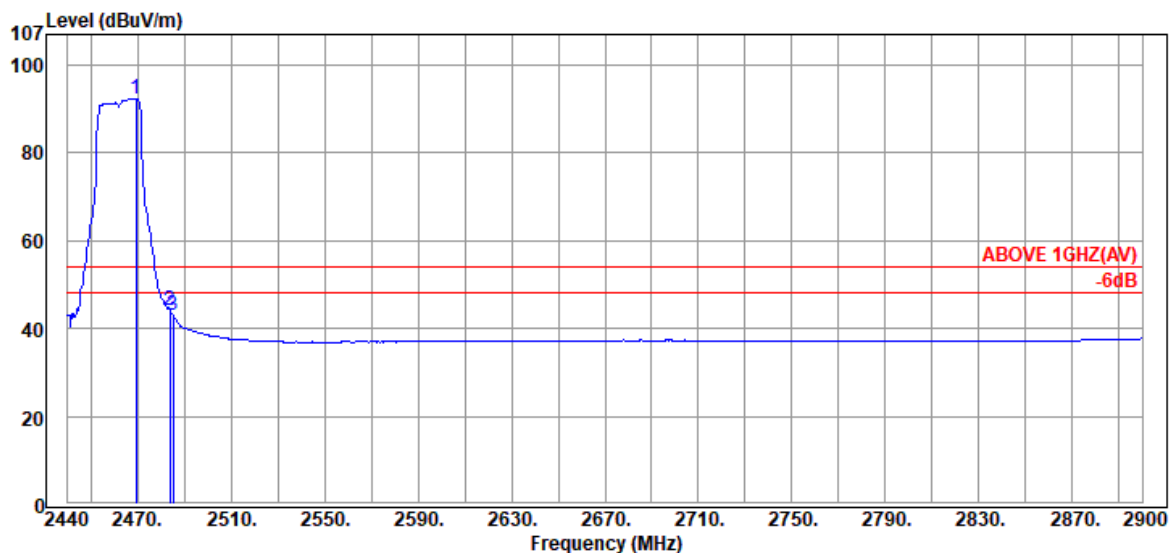

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.44	28.62	6.12	57.71	92.45	---	---	Average
2483.70	28.70	6.13	9.14	43.97	54.00	10.03	Average
2485.08	28.71	6.13	8.18	43.02	54.00	10.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

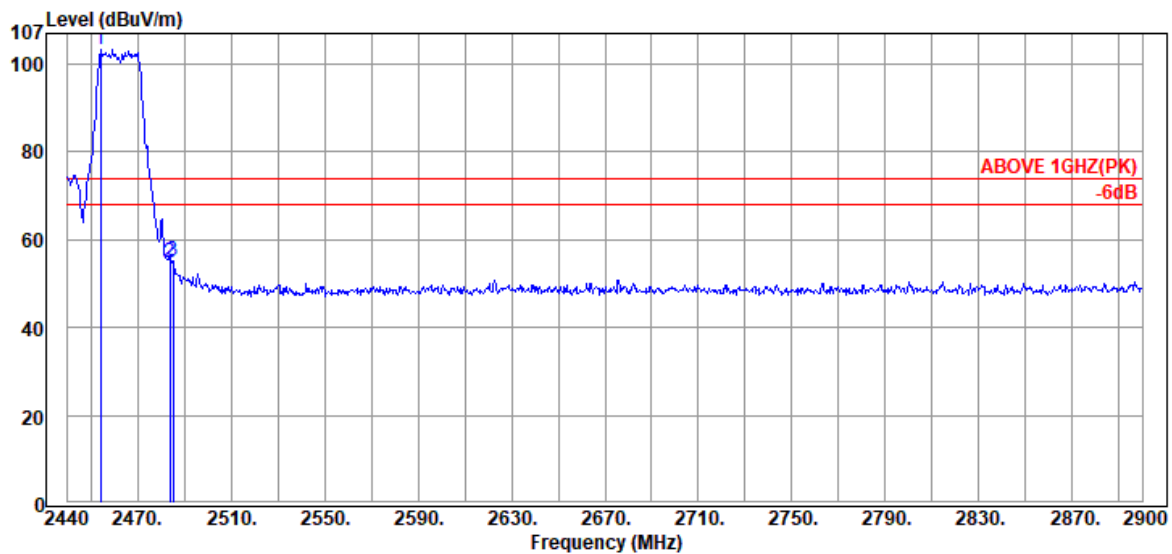

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.26	28.53	6.10	68.62	103.25	---	---	Peak
2483.70	28.70	6.13	19.88	54.71	74.00	19.29	Peak
2485.08	28.71	6.13	20.45	55.29	74.00	18.71	Peak

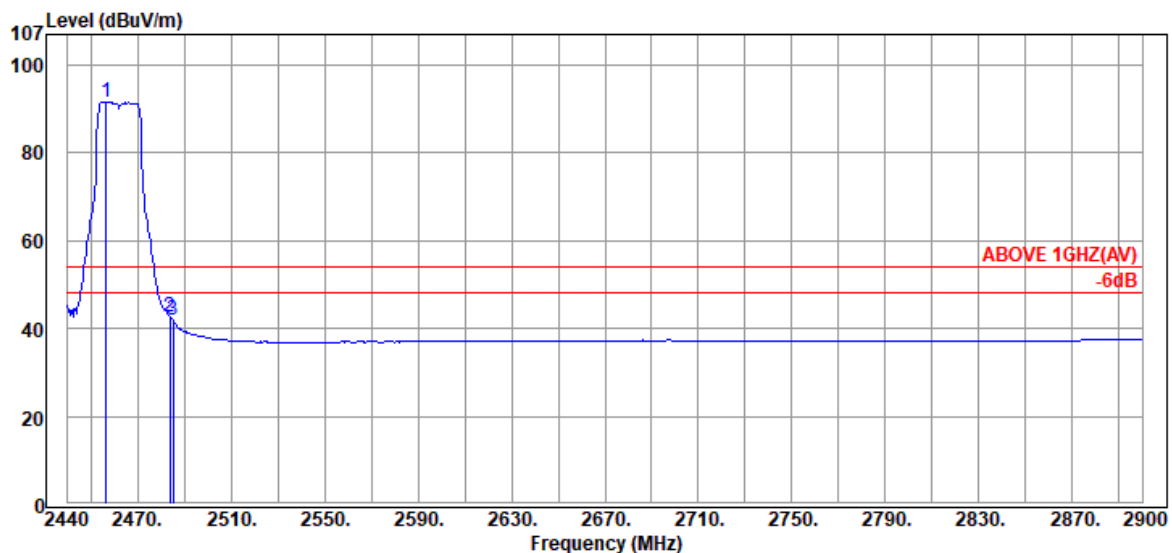

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.56	28.54	6.10	56.89	91.53	---	---	Average
2483.70	28.70	6.13	7.98	42.81	54.00	11.19	Average
2485.08	28.71	6.13	7.06	41.90	54.00	12.10	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

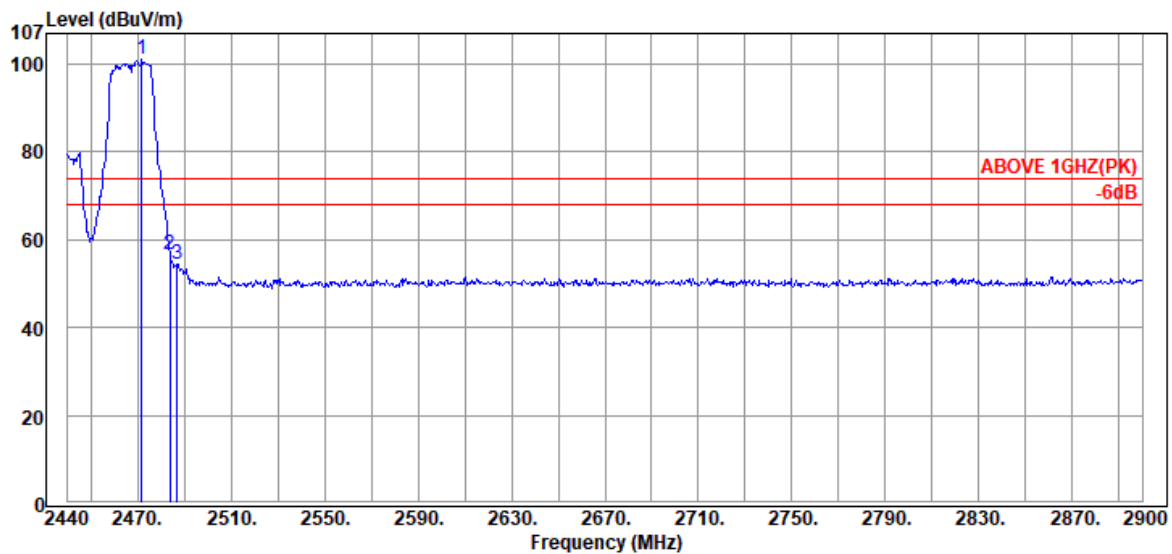

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.74	28.63	6.12	66.55	101.30	---	---	Peak
2483.70	28.70	6.13	21.66	56.49	74.00	17.51	Peak
2486.92	28.72	6.14	19.60	54.46	74.00	19.54	Peak

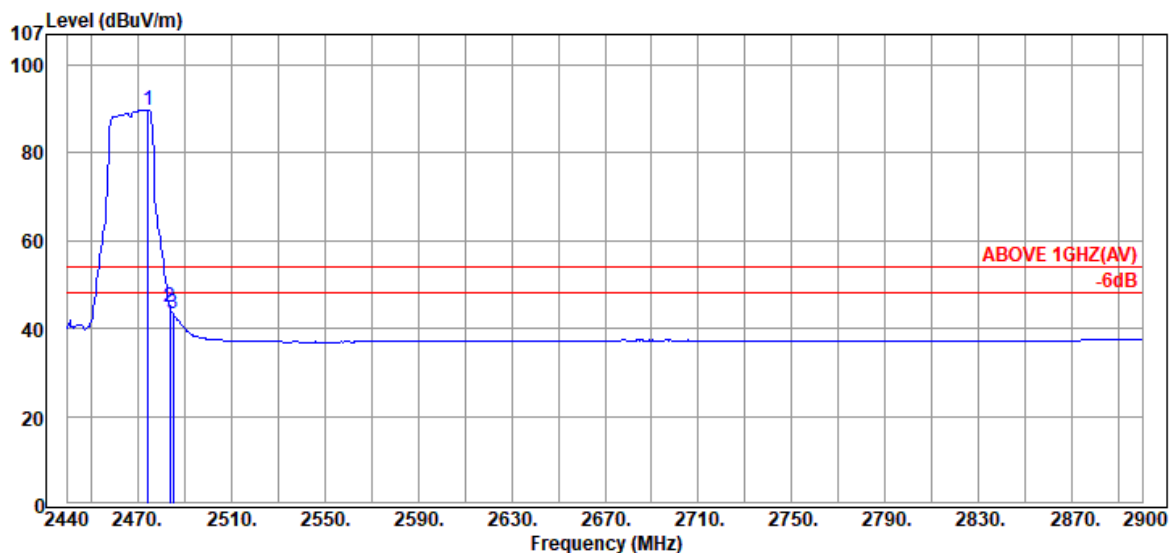

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.50	28.65	6.12	54.98	89.75	---	---	Average
2483.70	28.70	6.13	10.04	44.87	54.00	9.13	Average
2485.08	28.71	6.13	8.43	43.27	54.00	10.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

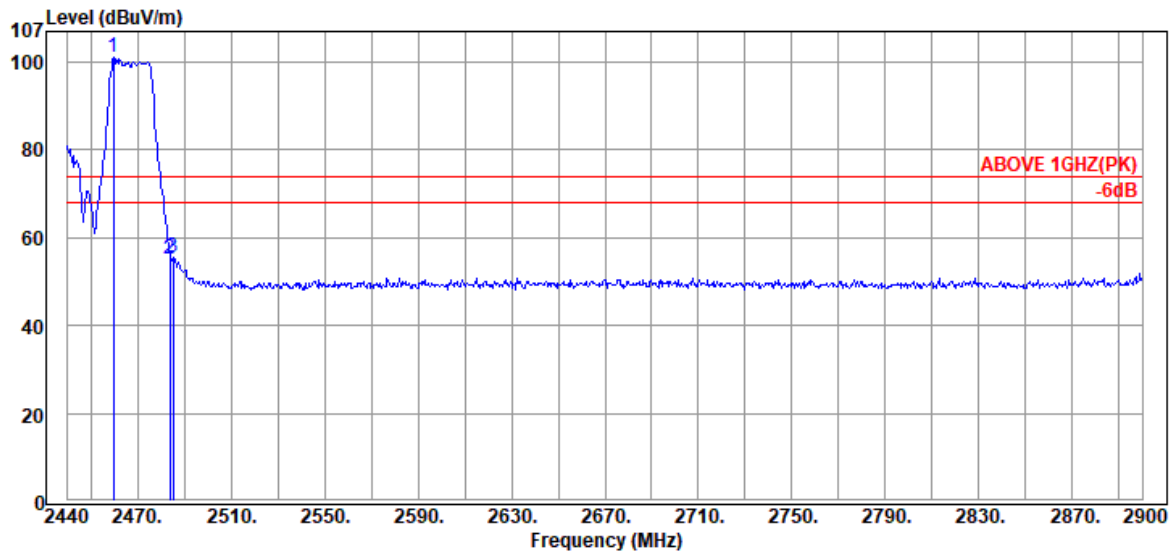

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.78	28.56	6.10	66.34	101.00	---	---	Peak
2483.70	28.70	6.13	20.36	55.19	74.00	18.81	Peak
2485.08	28.71	6.13	20.63	55.47	74.00	18.53	Peak

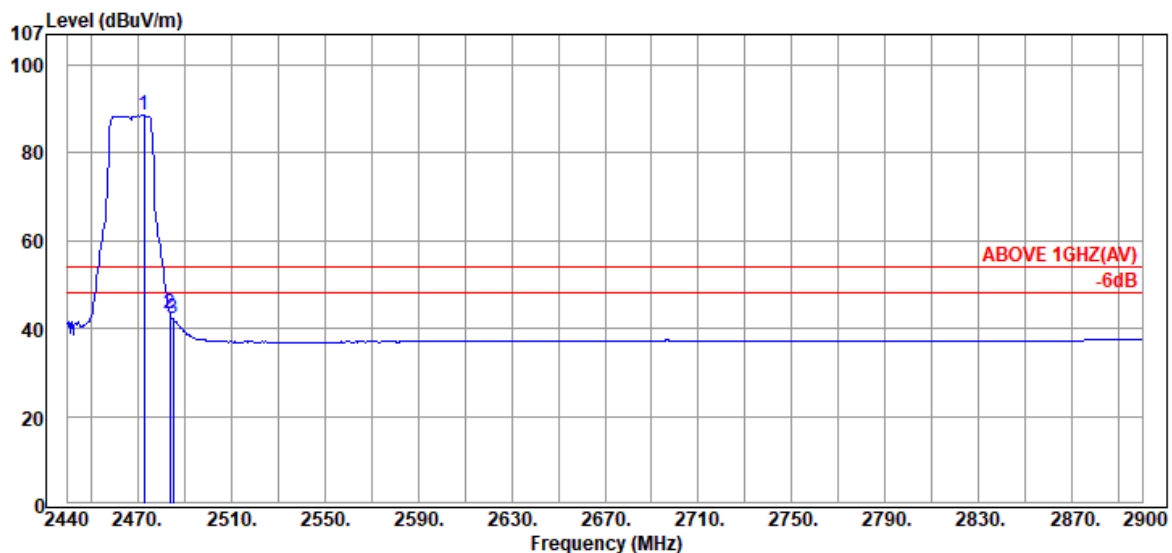

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.66	28.64	6.12	53.77	88.53	---	---	Average
2483.70	28.70	6.13	8.62	43.45	54.00	10.55	Average
2485.08	28.71	6.13	7.34	42.18	54.00	11.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

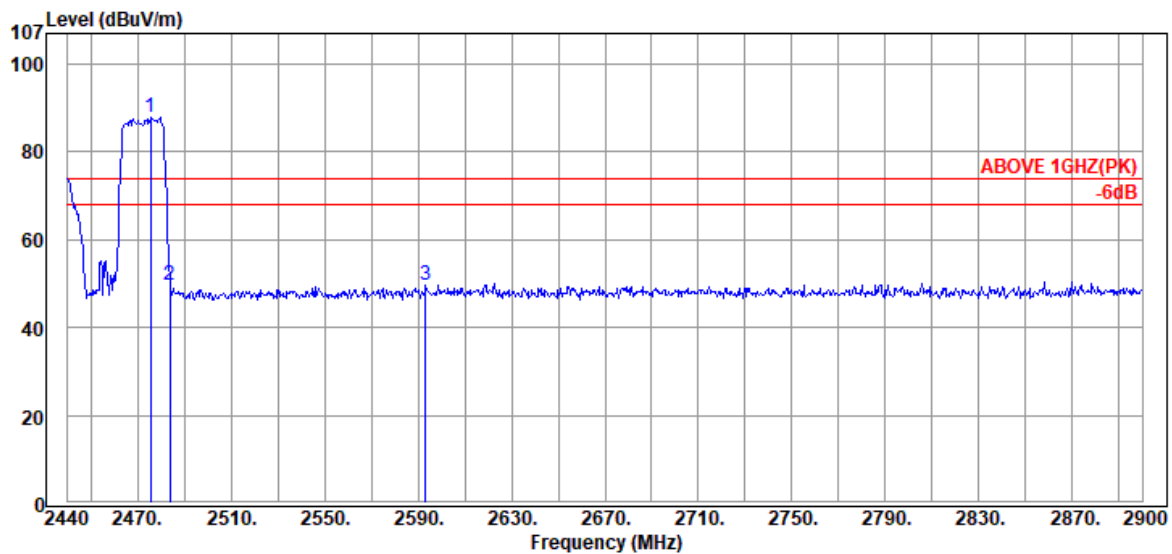

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.42	28.65	6.12	53.03	87.80	---	---	Peak
2483.70	28.70	6.13	14.67	49.50	74.00	24.50	Peak
2593.18	29.07	6.27	14.25	49.59	74.00	24.41	Peak

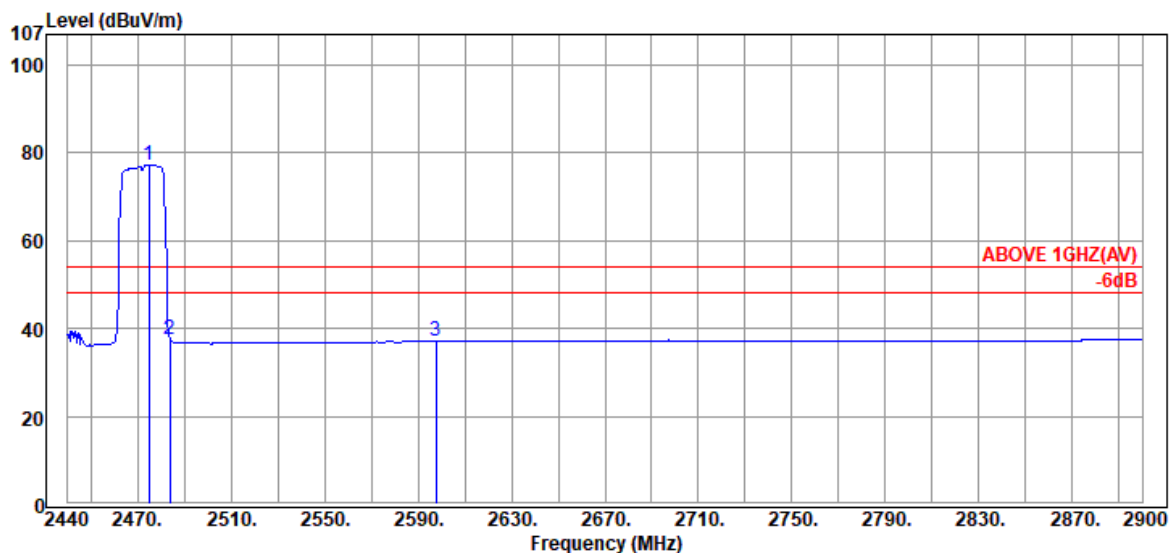

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.96	28.65	6.12	42.41	77.18	---	---	Average
2483.70	28.70	6.13	2.83	37.66	54.00	16.34	Average
2597.78	29.09	6.28	1.79	37.16	54.00	16.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

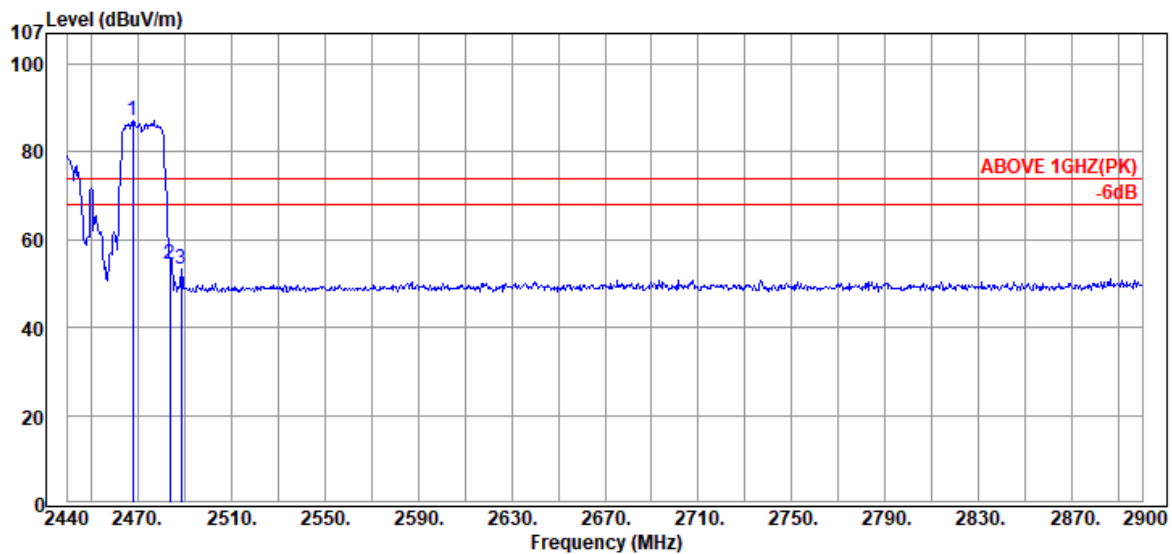

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.06	28.61	6.11	52.31	87.03	---	---	Peak
2483.70	28.70	6.13	19.42	54.25	74.00	19.75	Peak
2488.76	28.73	6.14	18.45	53.32	74.00	20.68	Peak

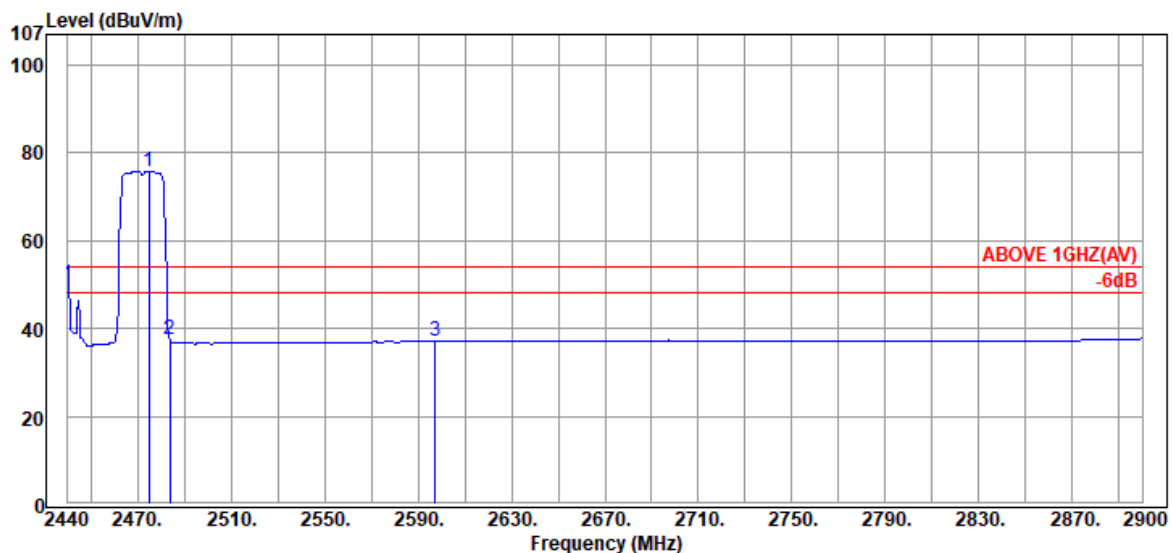

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.96	28.65	6.12	40.98	75.75	---	---	Average
2483.70	28.70	6.13	2.52	37.35	54.00	16.65	Average
2597.32	29.09	6.28	1.81	37.18	54.00	16.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

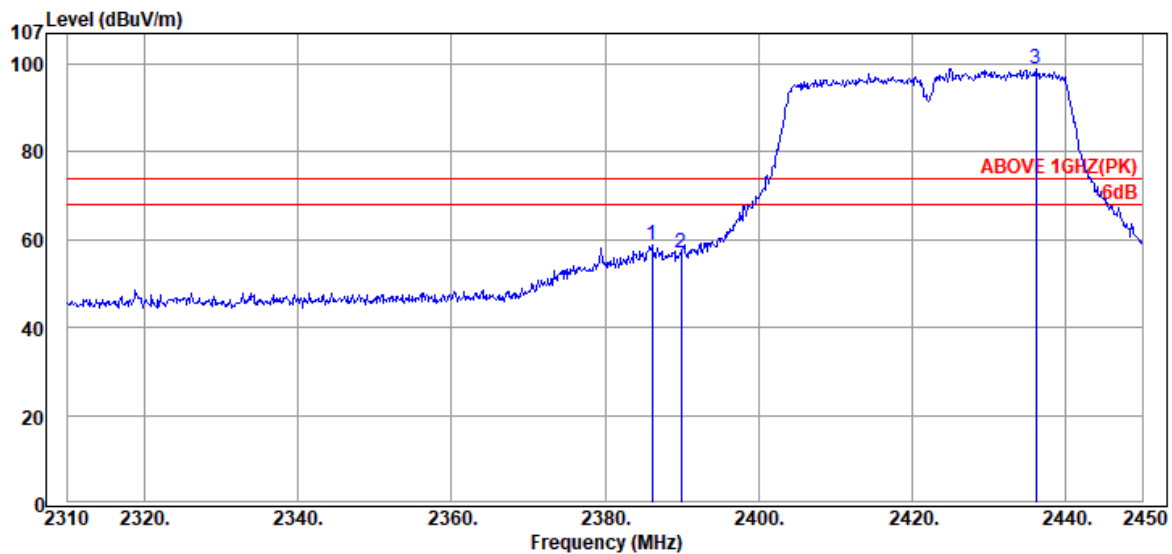

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.16	28.29	6.02	24.51	58.82	74.00	15.18	Peak
2389.94	28.32	6.02	22.58	56.92	74.00	17.08	Peak
@ 2436.14	28.47	6.08	64.33	98.88	---	---	Peak

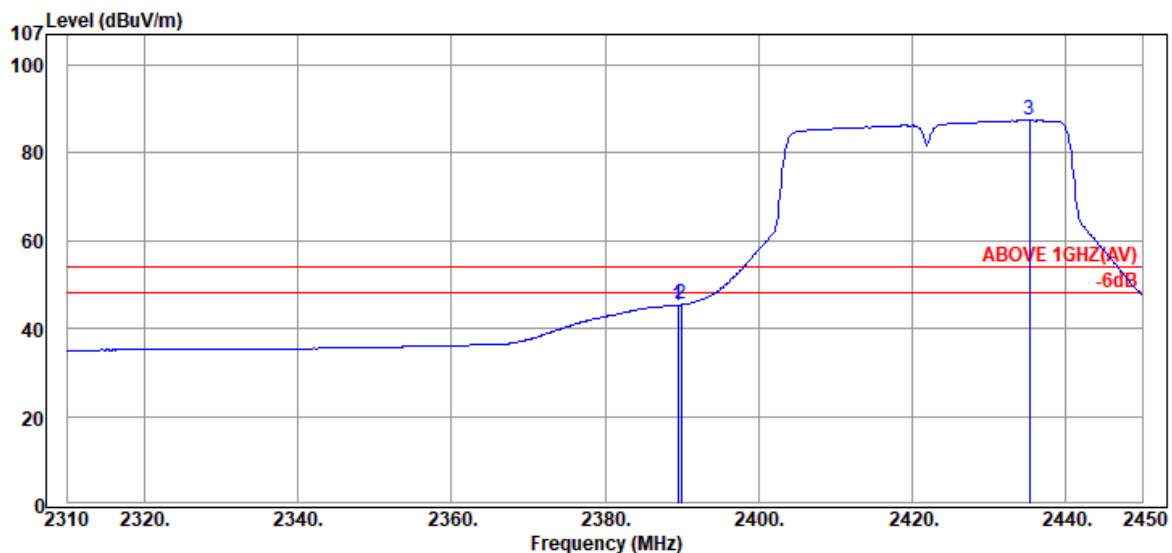

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	10.98	45.32	54.00	8.68	Average
2389.94	28.32	6.02	11.10	45.44	54.00	8.56	Average
@ 2435.30	28.47	6.08	52.86	87.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

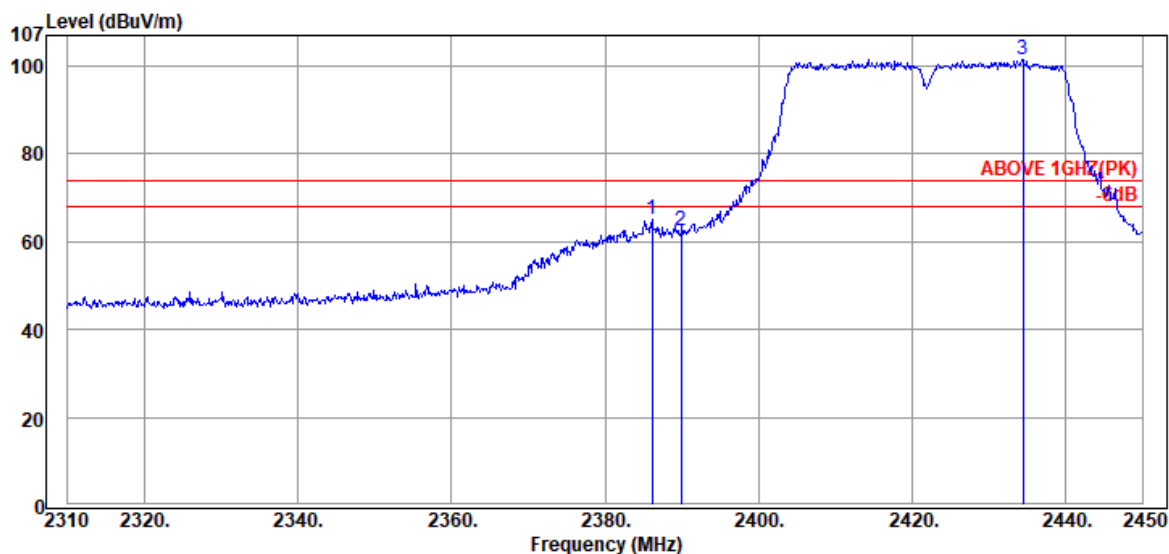

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.16	28.29	6.02	30.72	65.03	74.00	8.97	Peak
2389.94	28.32	6.02	28.30	62.64	74.00	11.36	Peak
@ 2434.46	28.47	6.08	67.08	101.63	---	---	Peak

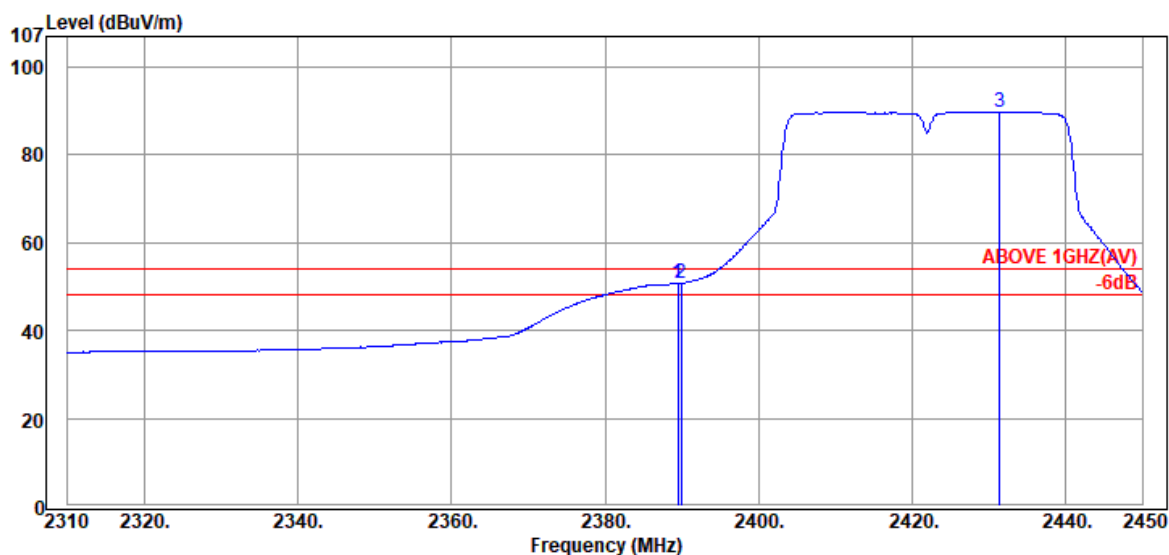

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	16.40	50.74	54.00	3.26	Average
2389.94	28.32	6.02	16.47	50.81	54.00	3.19	Average
@ 2431.38	28.46	6.07	55.26	89.79	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

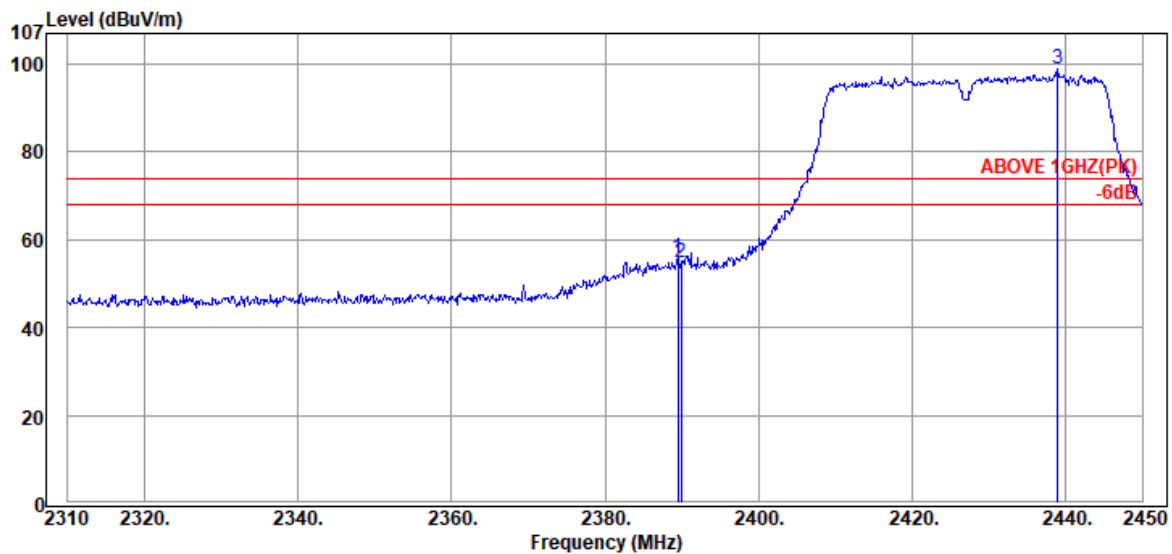

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	21.39	55.73	74.00	18.27	Peak
2389.94	28.32	6.02	20.29	54.63	74.00	19.37	Peak
@ 2438.94	28.48	6.08	64.24	98.80	---	---	Peak

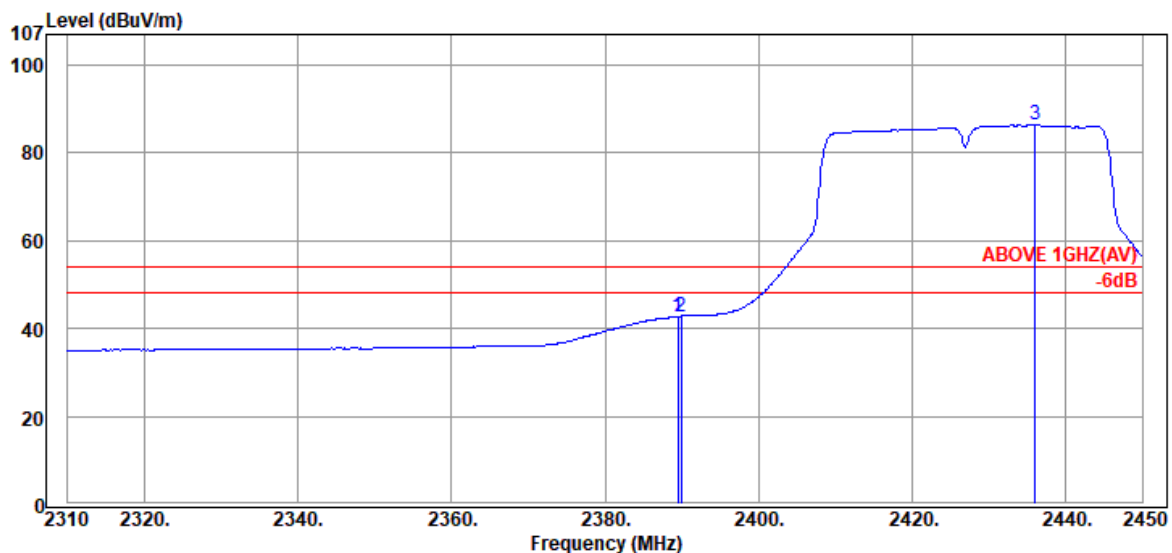

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	8.42	42.76	54.00	11.24	Average
2389.94	28.32	6.02	8.47	42.81	54.00	11.19	Average
@ 2436.00	28.47	6.08	51.75	86.30	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

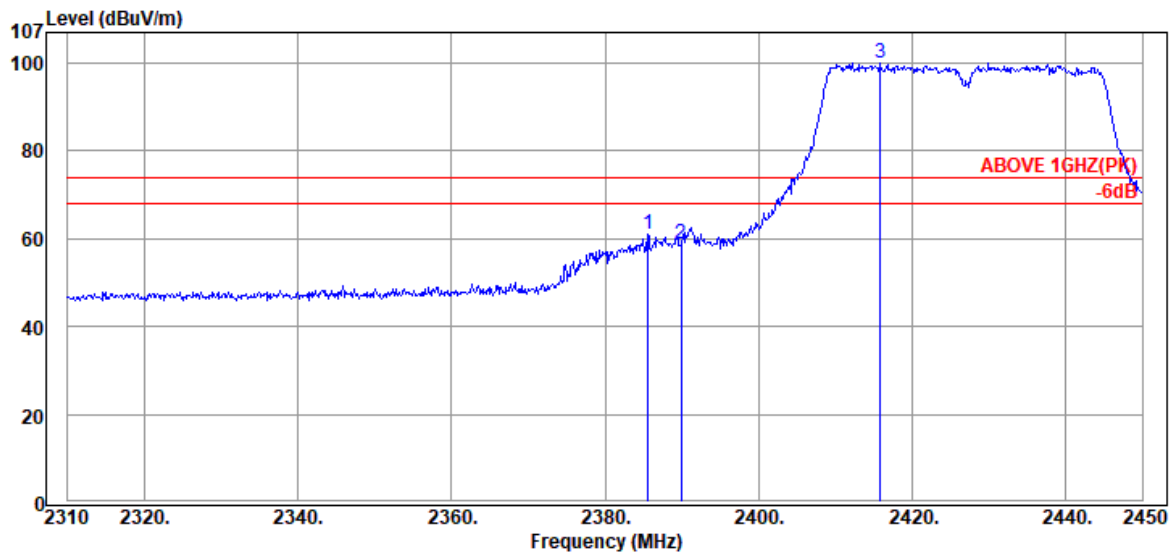

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.60	28.28	6.02	26.61	60.91	74.00	13.09	Peak
2389.94	28.32	6.02	24.58	58.92	74.00	15.08	Peak
@ 2415.84	28.43	6.05	65.68	100.16	---	---	Peak

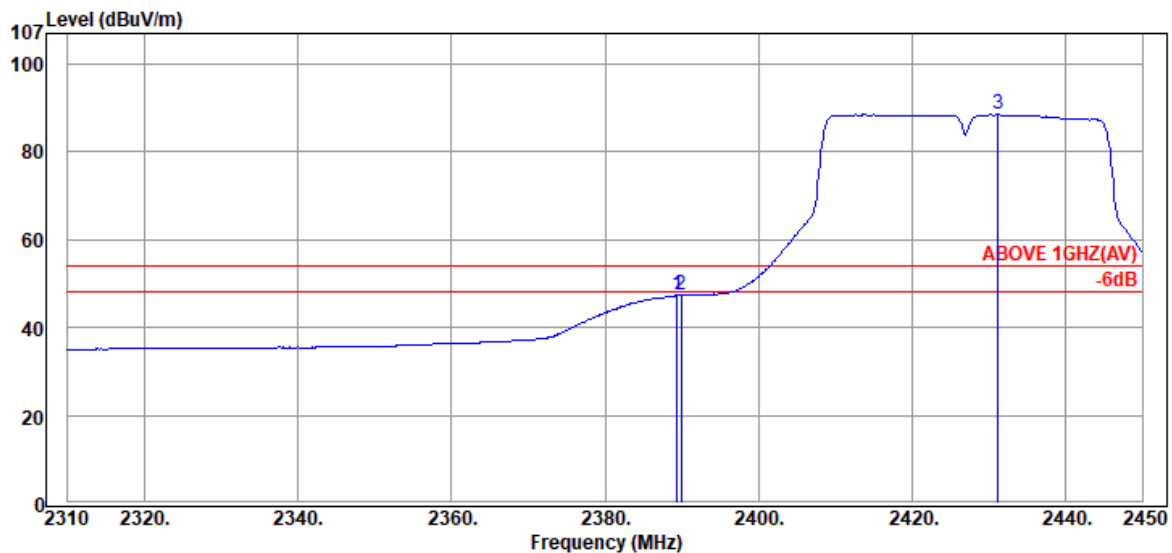

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	28.32	6.02	12.94	47.28	54.00	6.72	Average
2389.94	28.32	6.02	13.04	47.38	54.00	6.62	Average
@ 2431.24	28.46	6.07	53.94	88.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

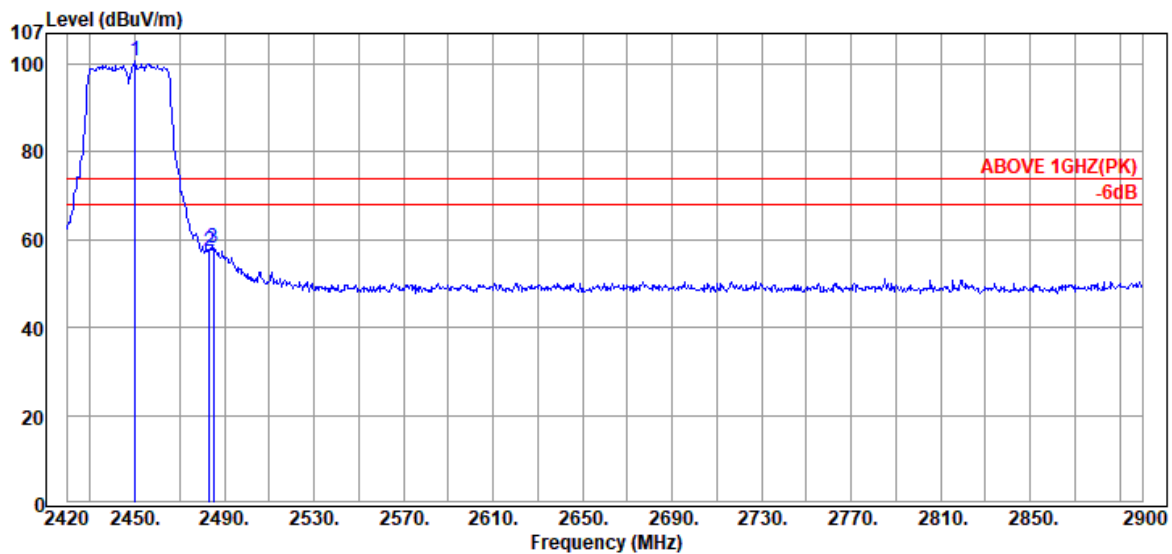

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.24	28.50	6.09	66.06	100.65	---	---	Peak
2483.36	28.70	6.13	22.62	57.45	74.00	16.55	Peak
2485.28	28.71	6.13	23.10	57.94	74.00	16.06	Peak

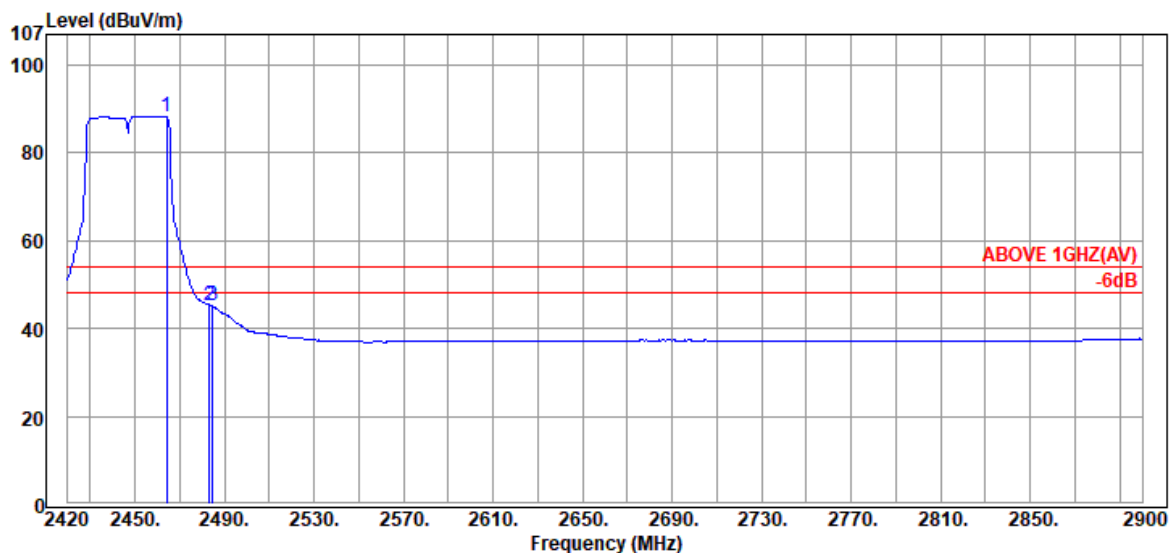

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.16	28.58	6.11	53.72	88.41	---	---	Average
2483.36	28.70	6.13	10.50	45.33	54.00	8.67	Average
2484.80	28.71	6.13	10.22	45.06	54.00	8.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

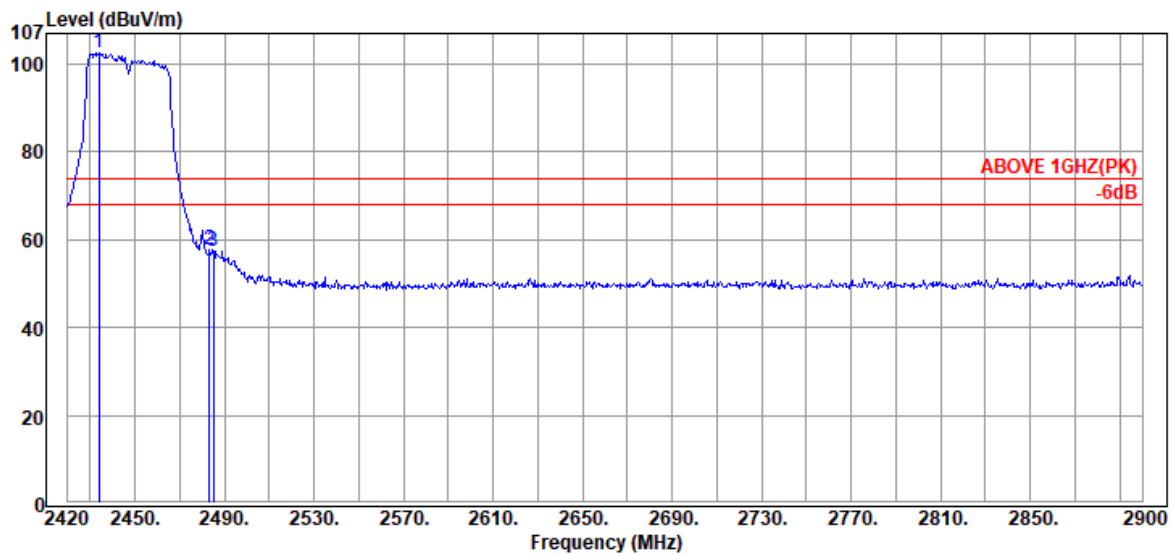

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2433.92	28.47	6.08	67.93	102.48	---	---	Peak
	2483.36	28.70	6.13	22.87	57.70	74.00	16.30	Peak
	2485.28	28.71	6.13	22.54	57.38	74.00	16.62	Peak

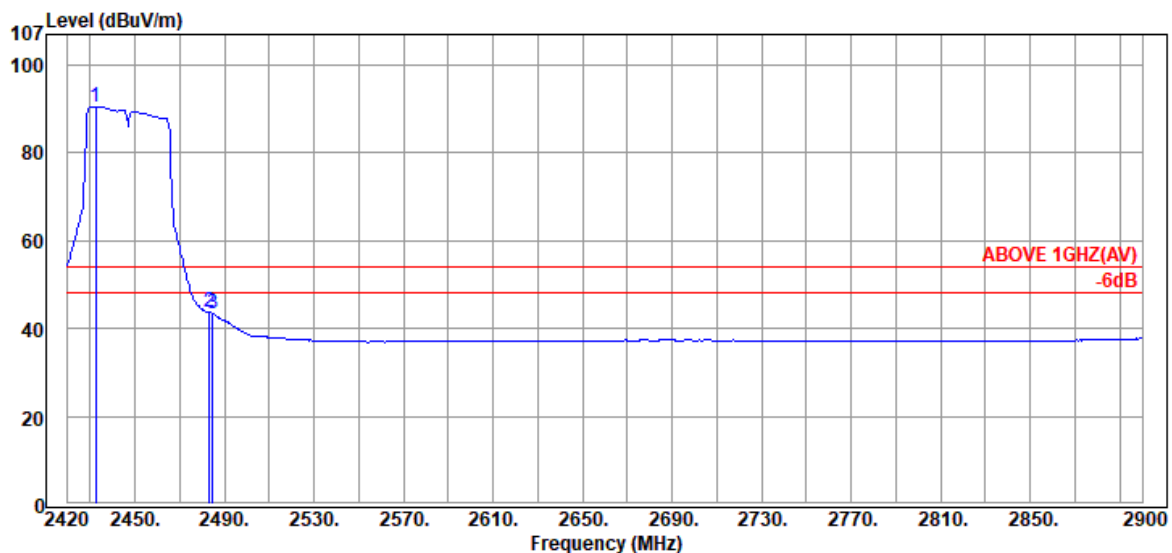

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2432.48	28.46	6.07	55.99	90.52	---	---	Average
	2483.36	28.70	6.13	8.79	43.62	54.00	10.38	Average
	2484.80	28.71	6.13	8.48	43.32	54.00	10.68	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

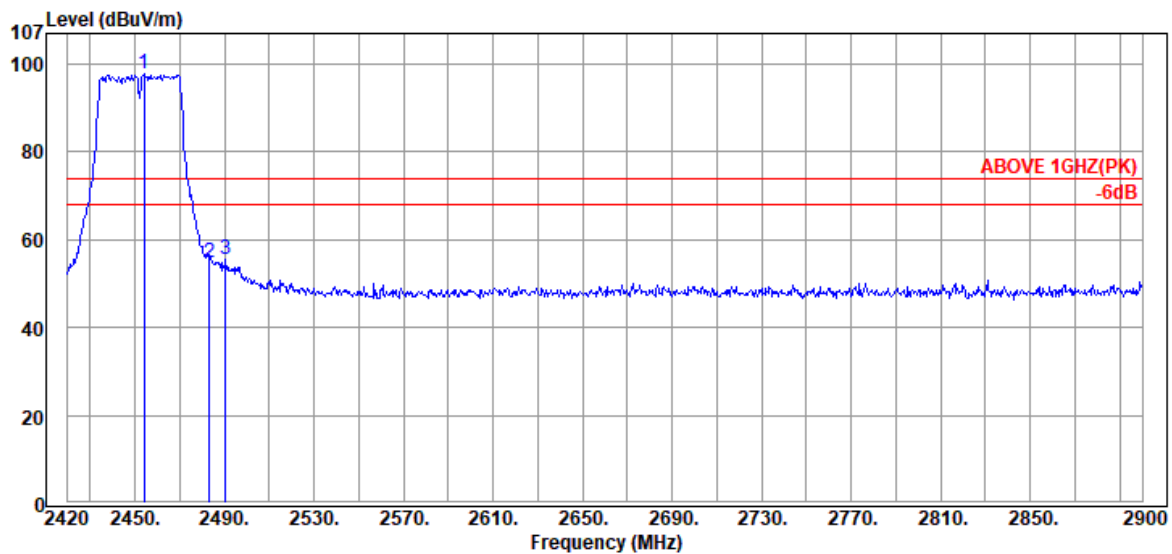

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.08	28.52	6.10	63.26	97.88	---	---	Peak
2483.36	28.70	6.13	20.12	54.95	74.00	19.05	Peak
2490.56	28.74	6.14	20.69	55.57	74.00	18.43	Peak

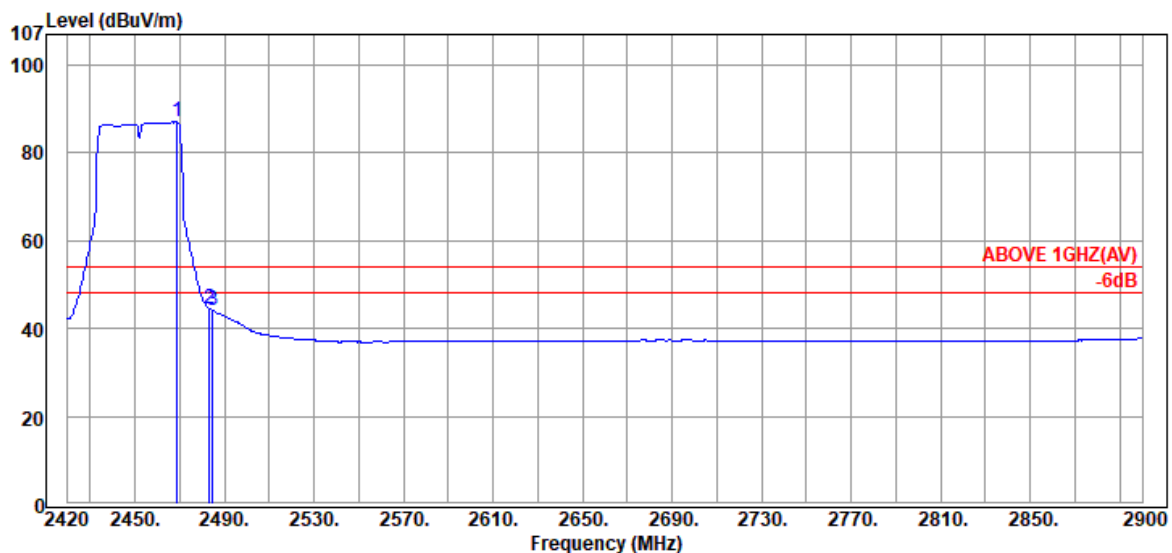

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.96	28.61	6.12	52.30	87.03	---	---	Average
2483.36	28.70	6.13	9.73	44.56	54.00	9.44	Average
2484.80	28.71	6.13	9.29	44.13	54.00	9.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

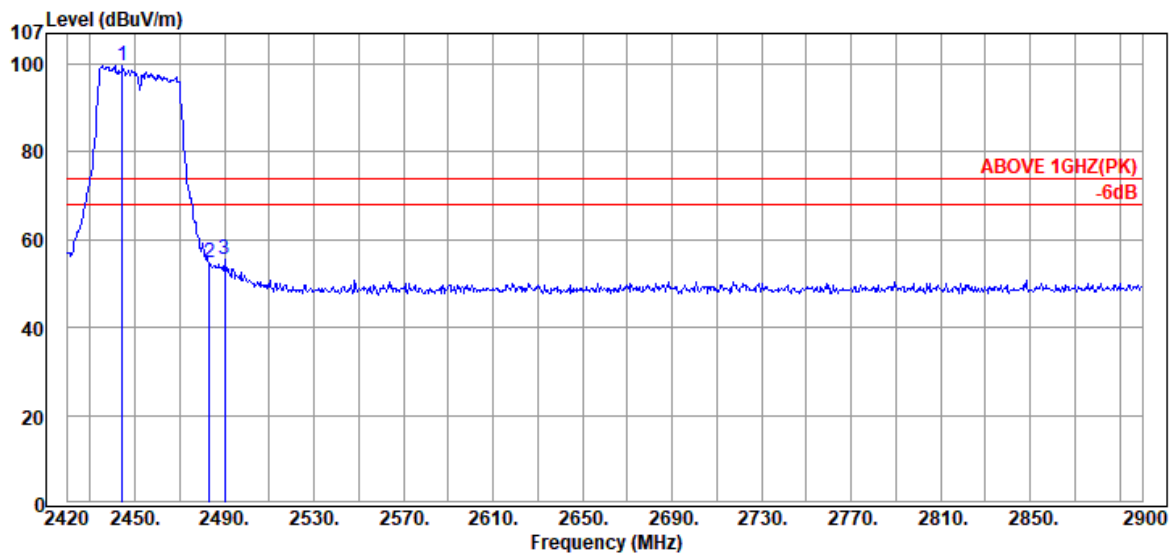

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.48	28.49	6.09	65.17	99.75	---	---	Peak
2483.36	28.70	6.13	19.81	54.64	74.00	19.36	Peak
2490.08	28.74	6.14	20.53	55.41	74.00	18.59	Peak

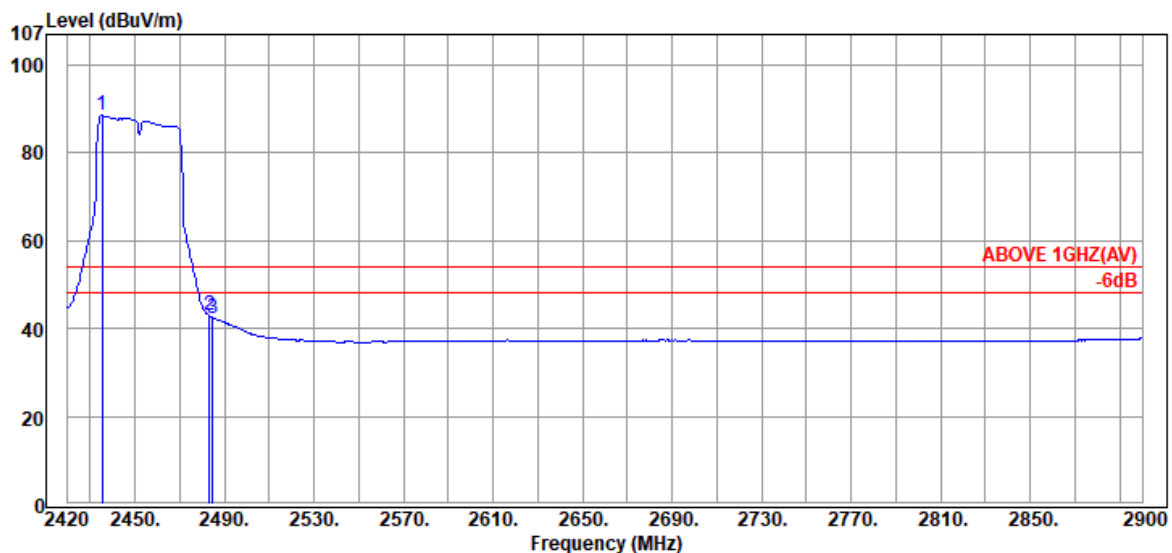

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2435.36	28.47	6.08	53.93	88.48	---	---	Average
2483.36	28.70	6.13	8.04	42.87	54.00	11.13	Average
2484.80	28.71	6.13	7.61	42.45	54.00	11.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

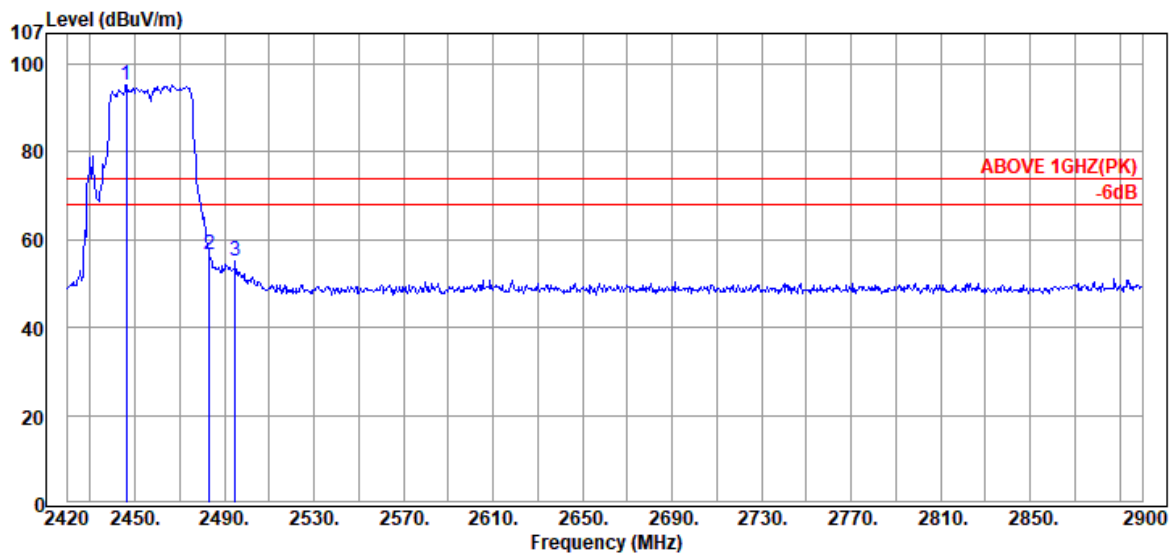

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.40	28.49	6.09	60.76	95.34	---	---	Peak
2483.36	28.70	6.13	21.83	56.66	74.00	17.34	Peak
2494.88	28.77	6.14	20.36	55.27	74.00	18.73	Peak

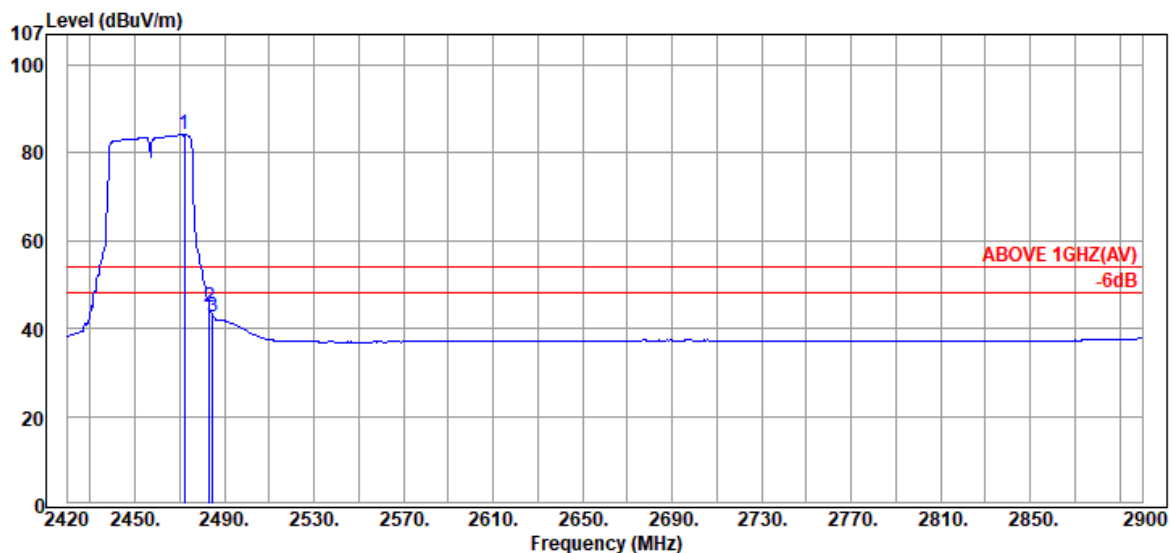

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.32	28.63	6.12	49.35	84.10	---	---	Average
2483.36	28.70	6.13	10.01	44.84	54.00	9.16	Average
2484.80	28.71	6.13	7.97	42.81	54.00	11.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

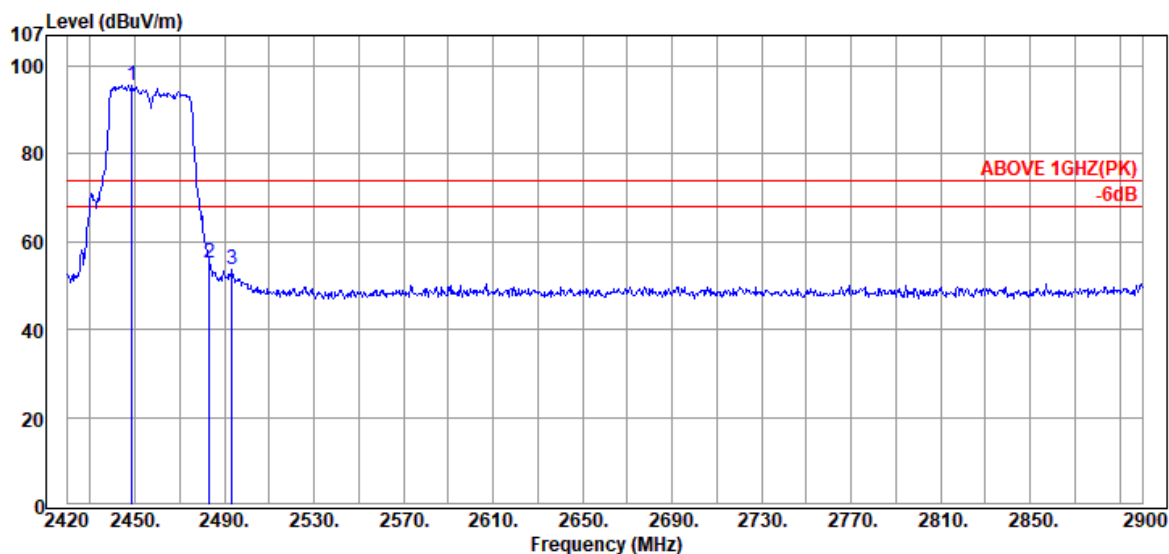

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.80	28.50	6.09	61.12	95.71	---	---	Peak
2483.36	28.70	6.13	20.50	55.33	74.00	18.67	Peak
2493.44	28.76	6.14	18.65	53.55	74.00	20.45	Peak

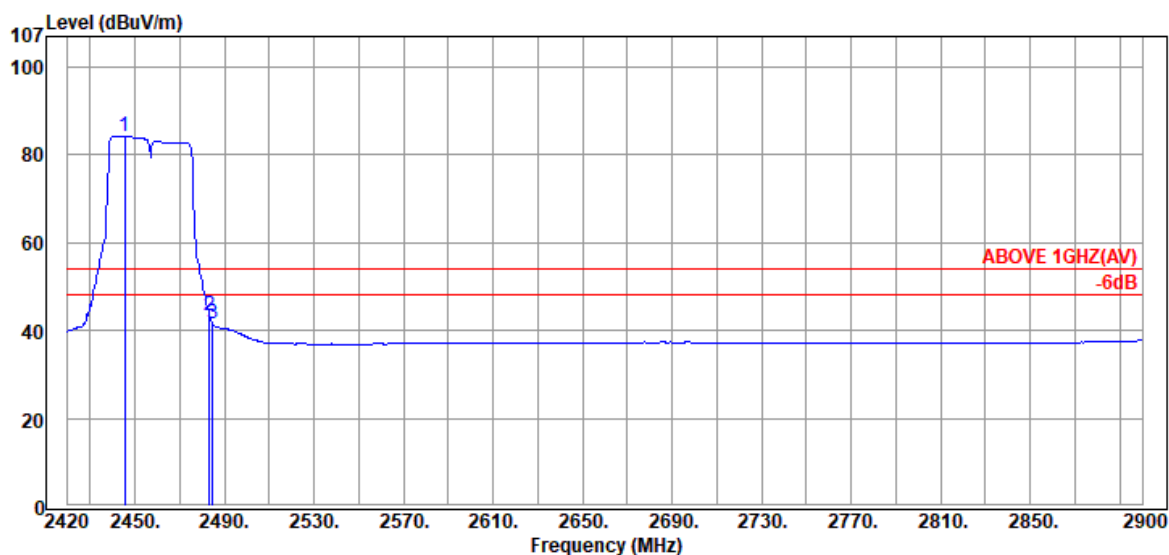

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.44	28.49	6.09	49.77	84.35	---	---	Average
2483.36	28.70	6.13	8.42	43.25	54.00	10.75	Average
2484.80	28.71	6.13	6.55	41.39	54.00	12.61	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

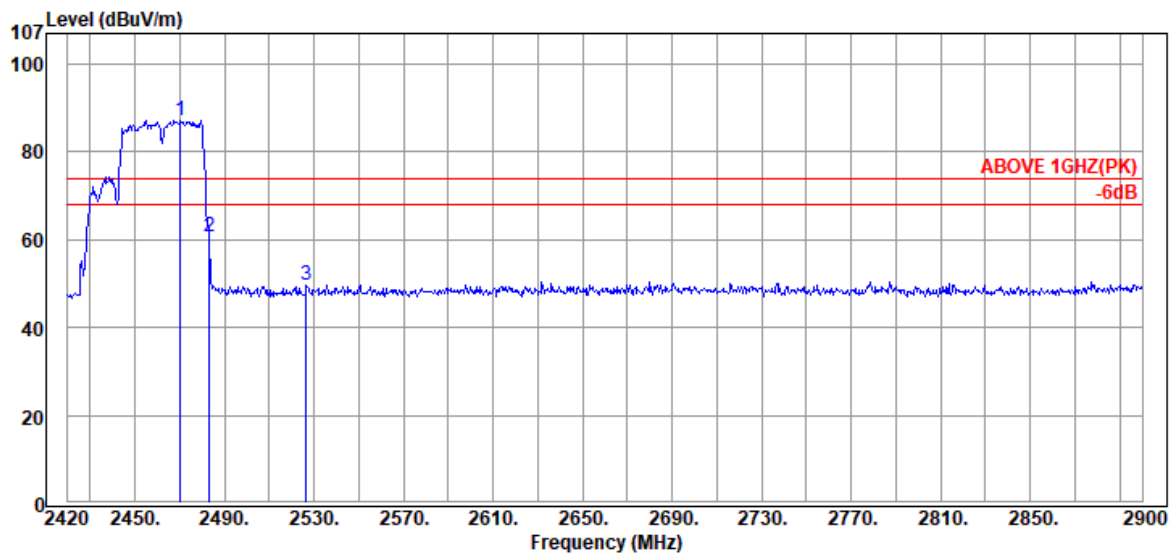

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.40	28.62	6.12	52.58	87.32	---	---	Peak
2483.36	28.70	6.13	25.81	60.64	74.00	13.36	Peak
2526.56	28.85	6.19	14.60	49.64	74.00	24.36	Peak

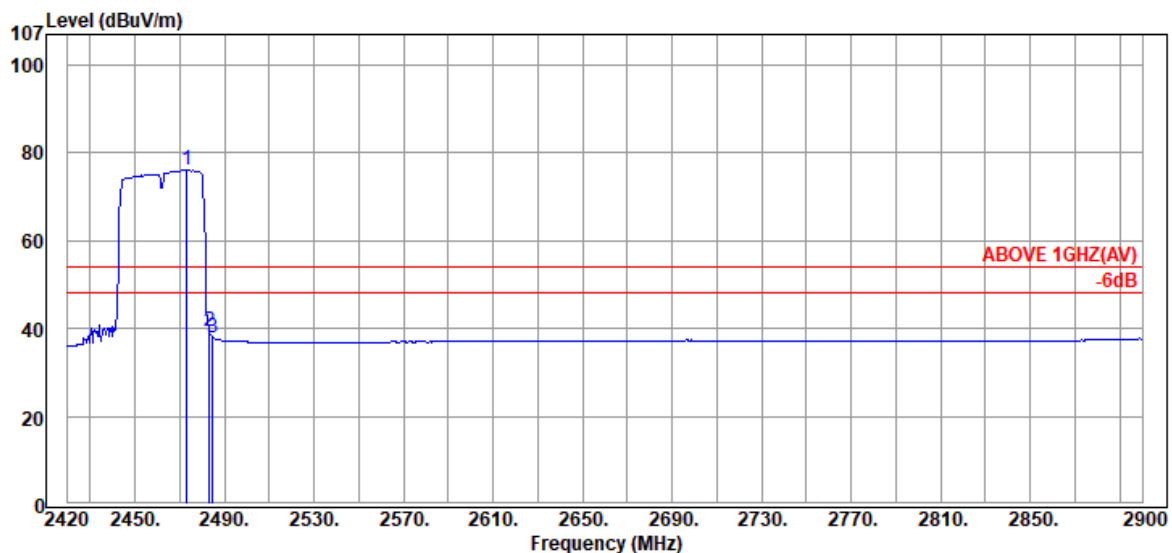

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.28	28.64	6.12	41.39	76.15	---	---	Average
2483.36	28.70	6.13	4.56	39.39	54.00	14.61	Average
2484.80	28.71	6.13	3.06	37.90	54.00	16.10	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

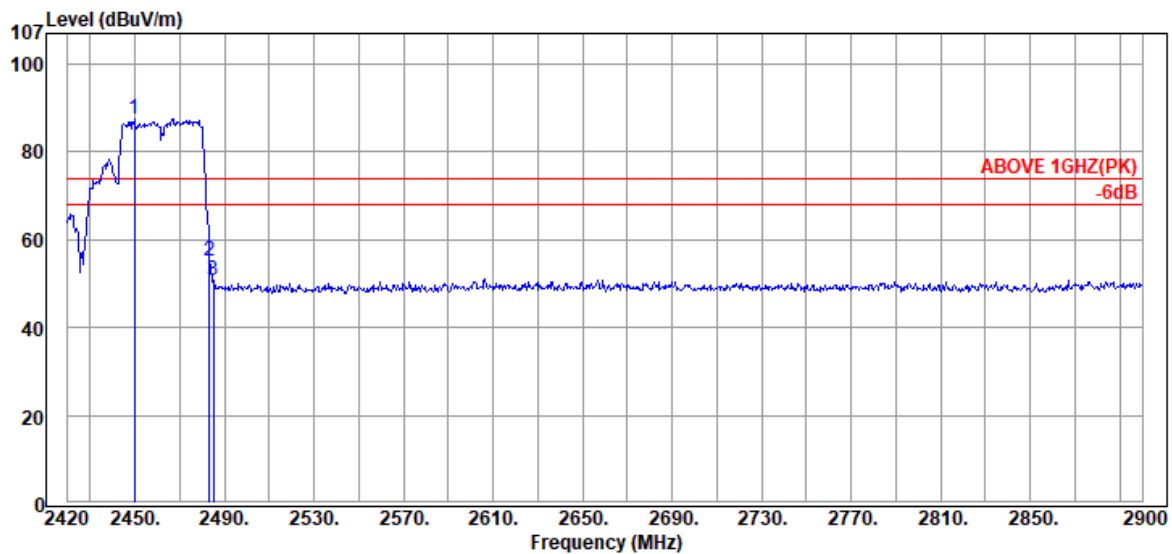

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.76	28.50	6.09	52.92	87.51	---	---	Peak
2483.36	28.70	6.13	20.34	55.17	74.00	18.83	Peak
2485.28	28.71	6.13	15.77	50.61	74.00	23.39	Peak

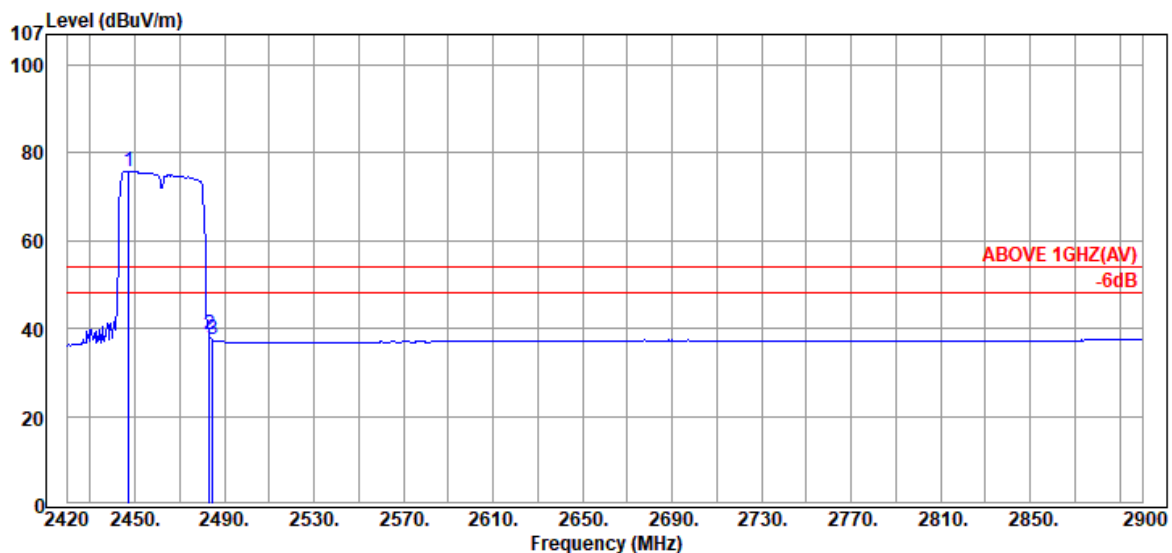

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.36	28.49	6.09	41.21	75.79	---	---	Average
2483.36	28.70	6.13	3.65	38.48	54.00	15.52	Average
2484.80	28.71	6.13	2.52	37.36	54.00	16.64	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

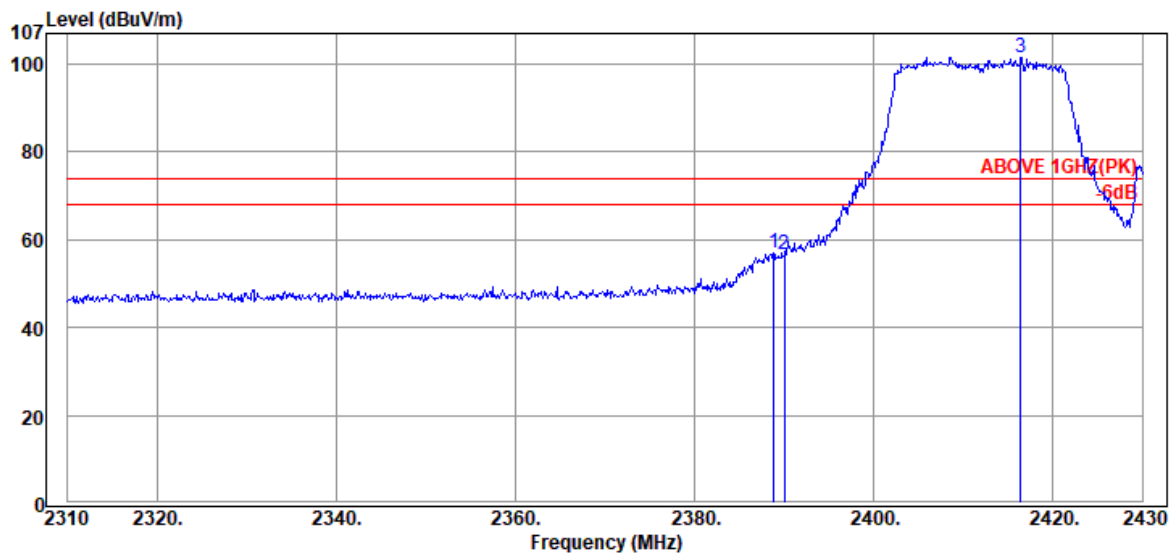

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.84	28.31	6.02	22.56	56.89	74.00	17.11	Peak
2390.04	28.32	6.03	22.14	56.49	74.00	17.51	Peak
@ 2416.44	28.43	6.06	66.99	101.48	---	---	Peak

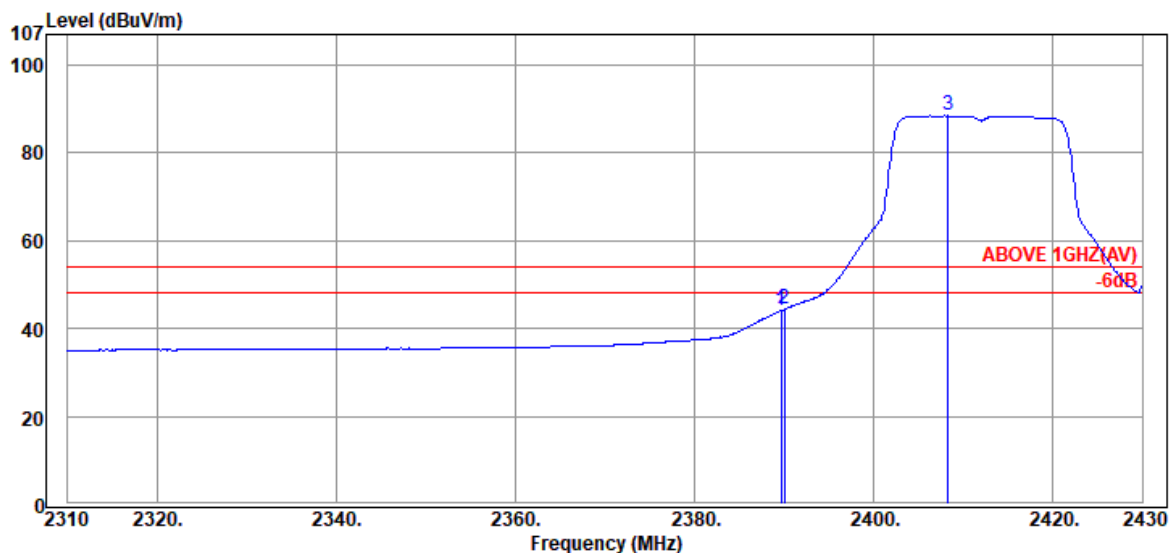

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	9.71	44.05	54.00	9.95	Average
2390.04	28.32	6.03	10.03	44.38	54.00	9.62	Average
@ 2408.28	28.42	6.05	53.99	88.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

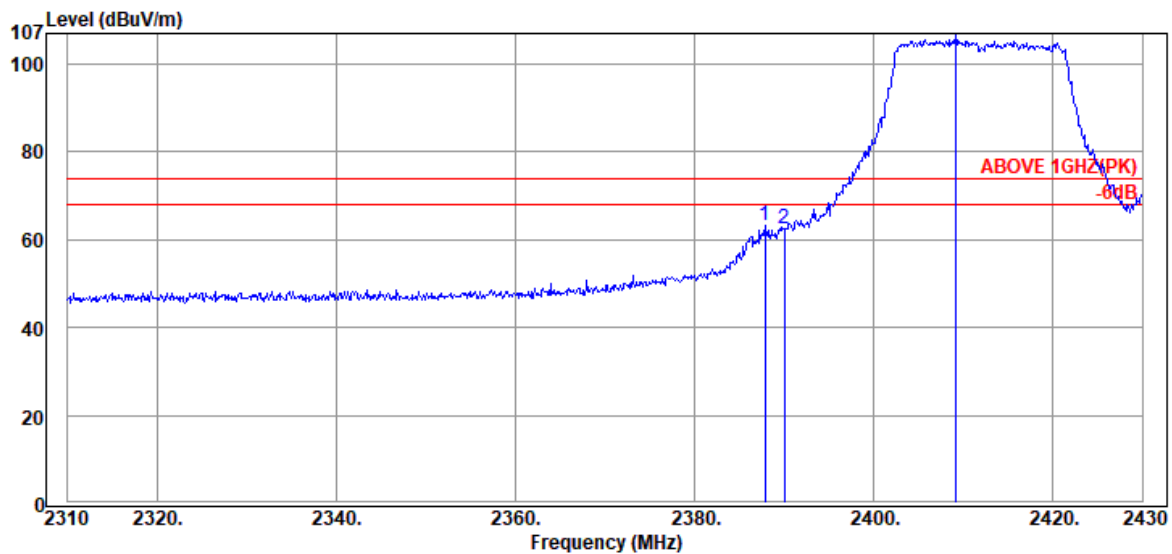

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.88	28.30	6.02	29.10	63.42	74.00	10.58	Peak
2390.04	28.32	6.03	28.17	62.52	74.00	11.48	Peak
@ 2409.24	28.42	6.05	72.61	107.08	---	---	Peak

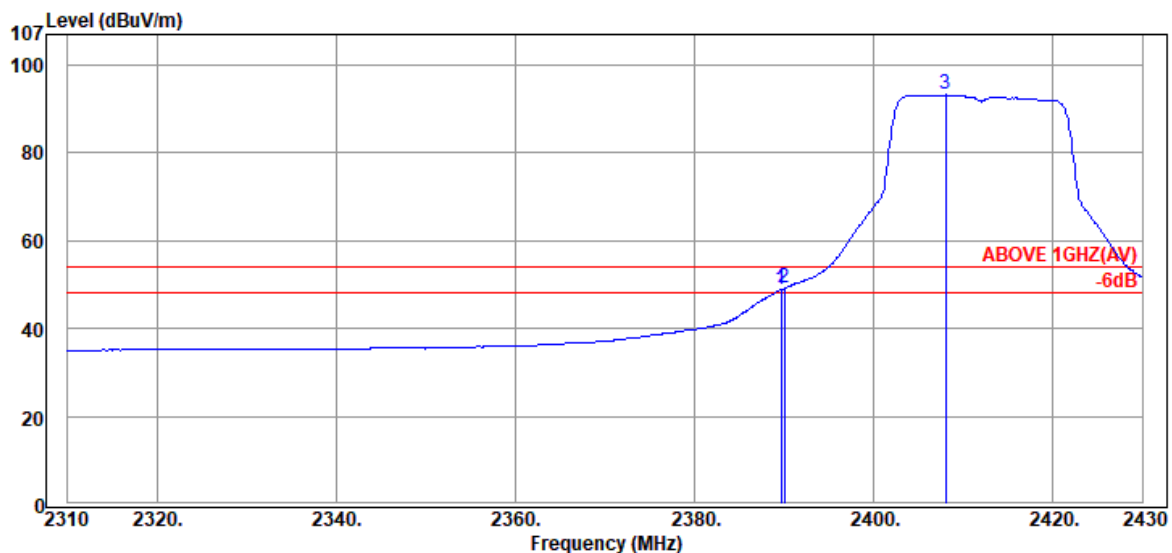

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	14.48	48.82	54.00	5.18	Average
2390.04	28.32	6.03	14.85	49.20	54.00	4.80	Average
@ 2408.04	28.42	6.05	58.78	93.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

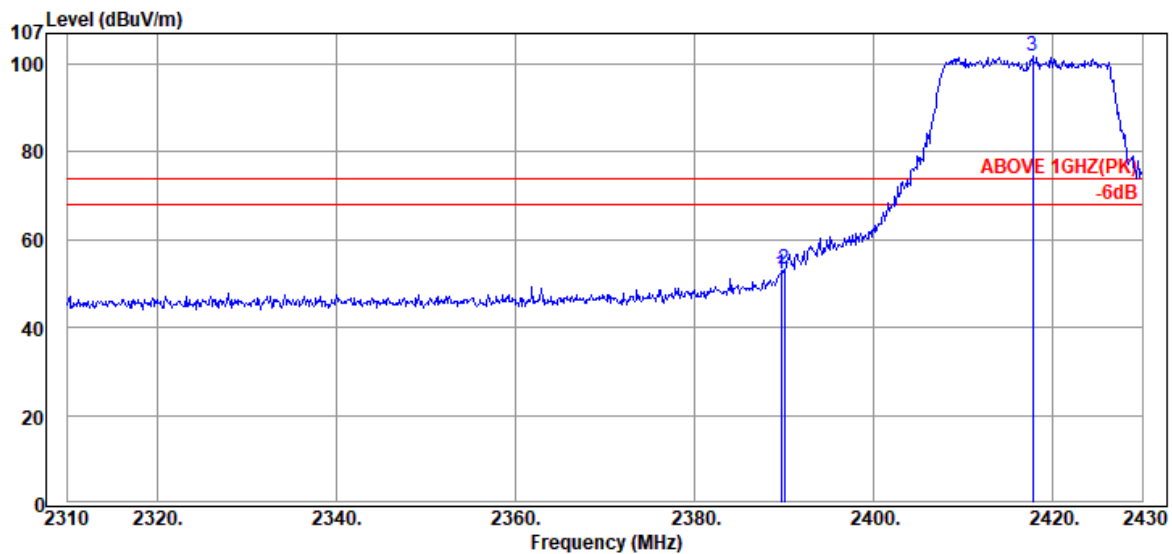

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	17.91	52.25	74.00	21.75	Peak
2390.04	28.32	6.03	18.92	53.27	74.00	20.73	Peak
@ 2417.76	28.44	6.06	67.34	101.84	---	---	Peak

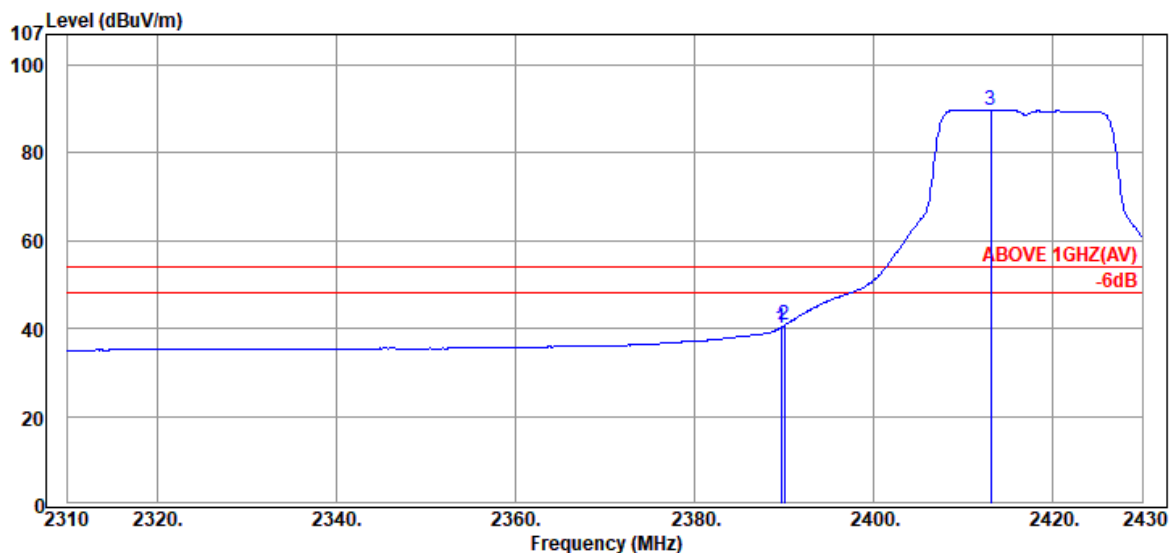

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	5.90	40.24	54.00	13.76	Average
2390.04	28.32	6.03	6.35	40.70	54.00	13.30	Average
@ 2413.08	28.43	6.05	55.33	89.81	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

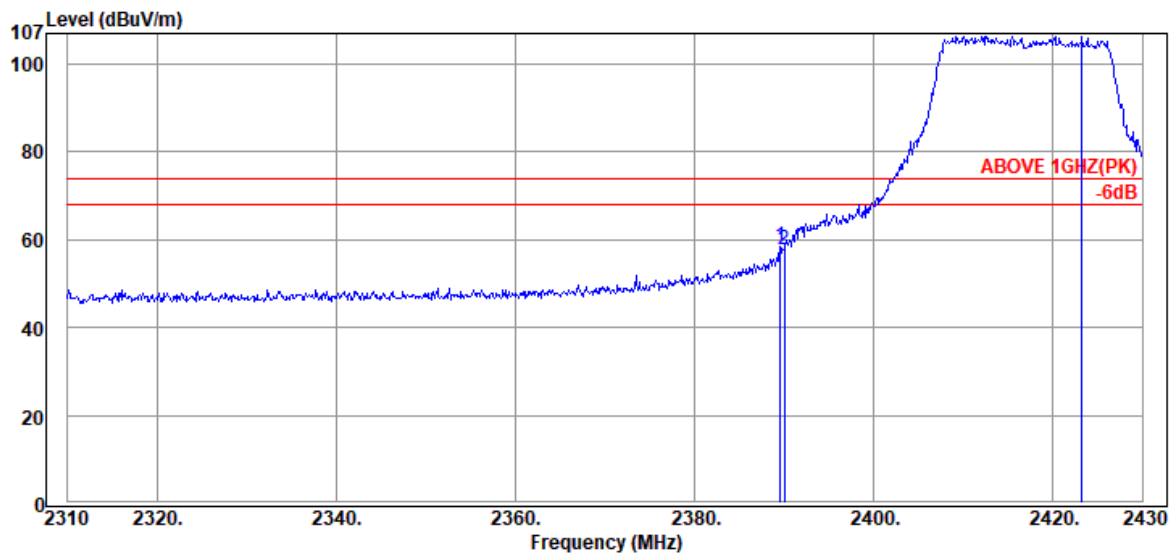

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	24.15	58.49	74.00	15.51	Peak
2390.04	28.32	6.03	23.49	57.84	74.00	16.16	Peak
@ 2423.28	28.45	6.06	71.89	106.40	---	---	Peak

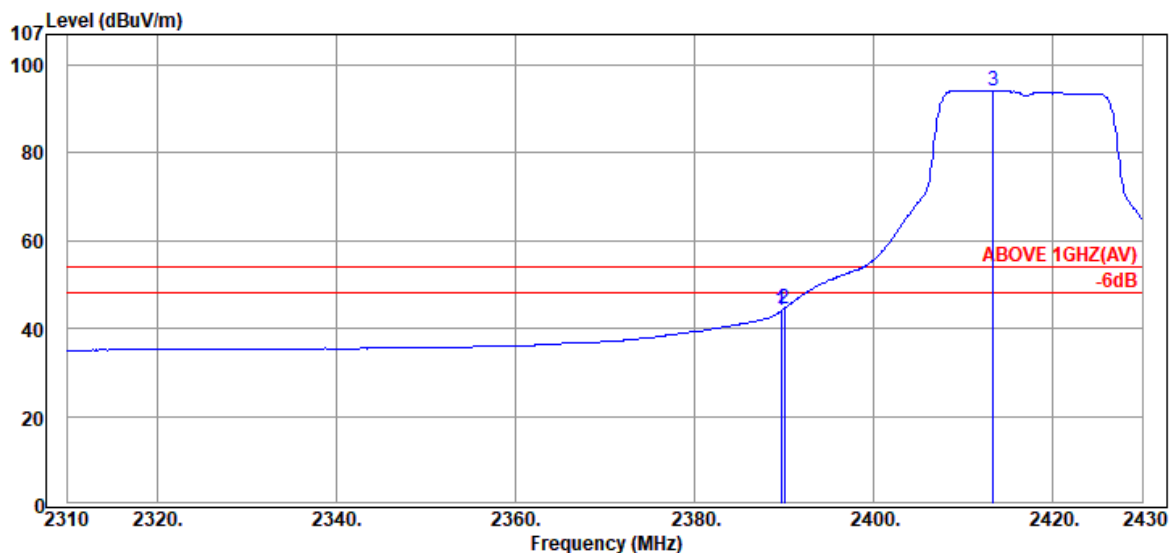

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	9.63	43.97	54.00	10.03	Average
2390.04	28.32	6.03	10.22	44.57	54.00	9.43	Average
@ 2413.32	28.43	6.05	59.83	94.31	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

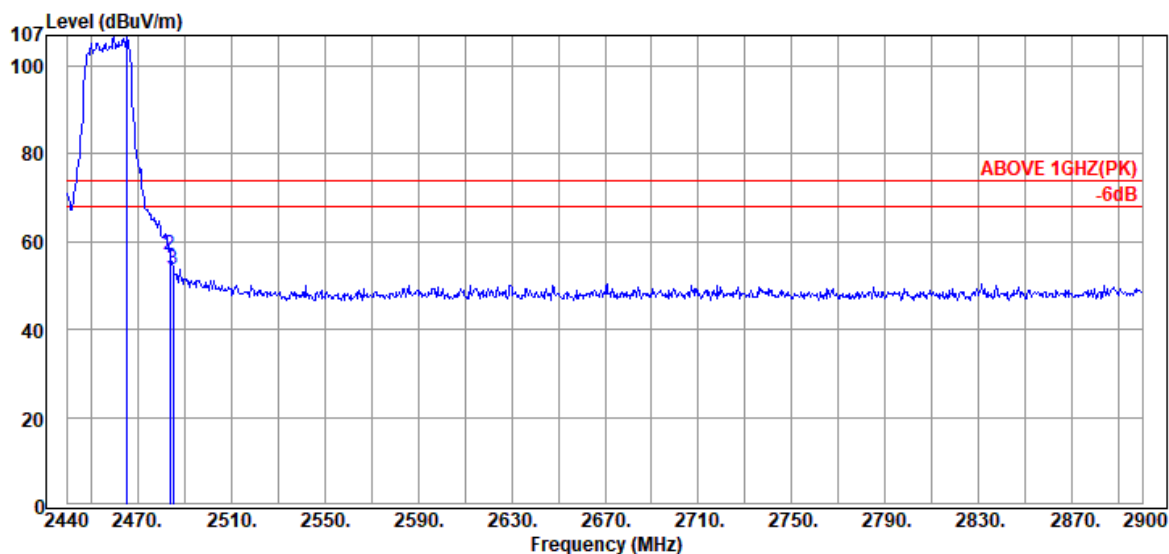

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.30	28.59	6.11	72.22	106.92	---	---	Peak
2483.70	28.70	6.13	22.21	57.04	74.00	16.96	Peak
2485.08	28.71	6.13	18.98	53.82	74.00	20.18	Peak

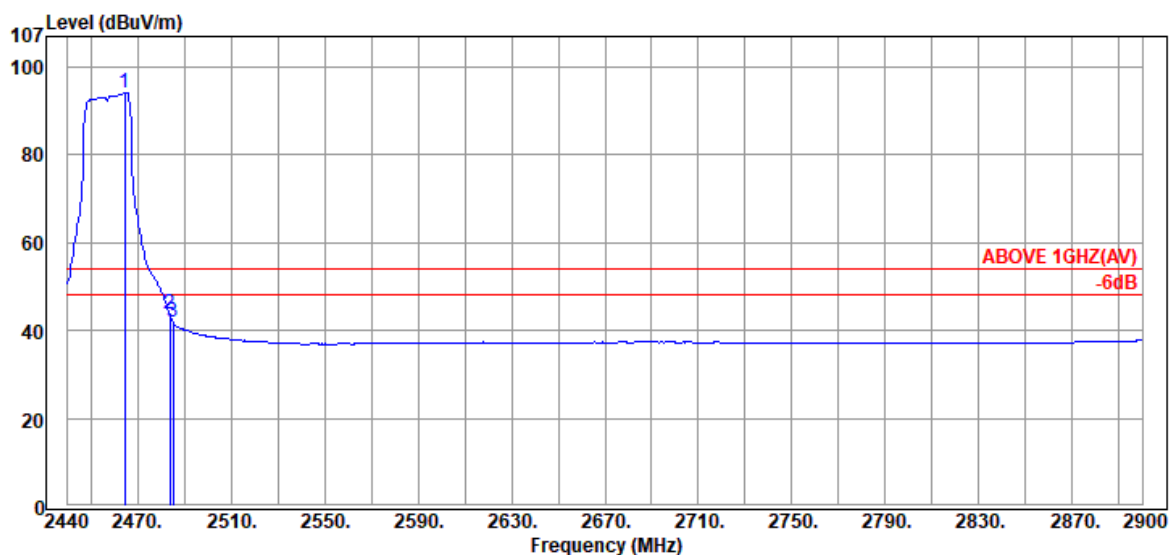

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.38	28.59	6.11	59.39	94.09	---	---	Average
2483.70	28.70	6.13	9.10	43.93	54.00	10.07	Average
2485.08	28.71	6.13	7.06	41.90	54.00	12.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

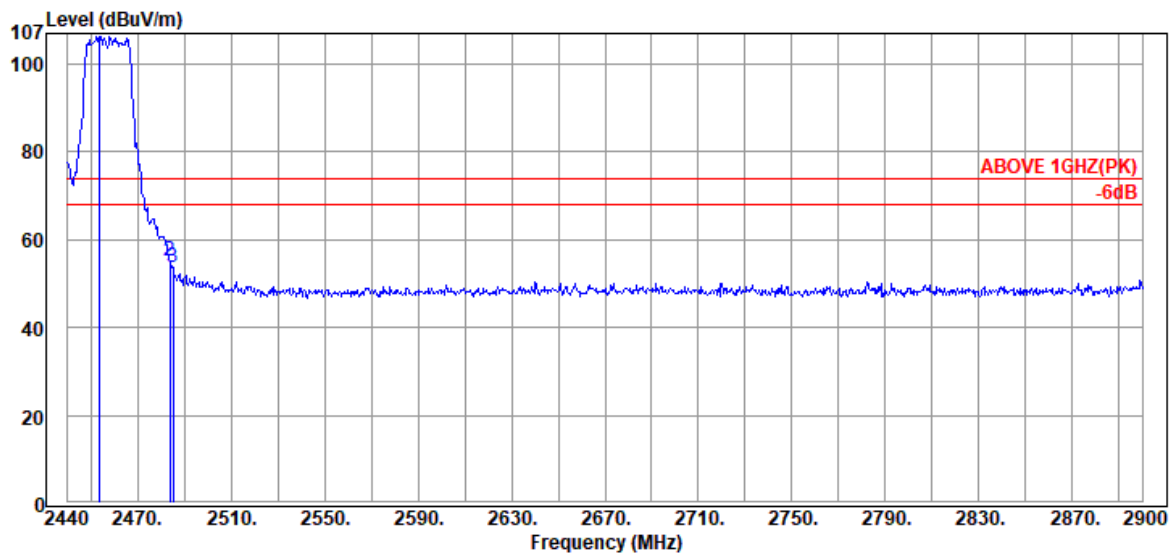

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.80	28.52	6.10	71.76	106.38	---	---	Peak
2483.70	28.70	6.13	20.47	55.30	74.00	18.70	Peak
2485.08	28.71	6.13	18.91	53.75	74.00	20.25	Peak

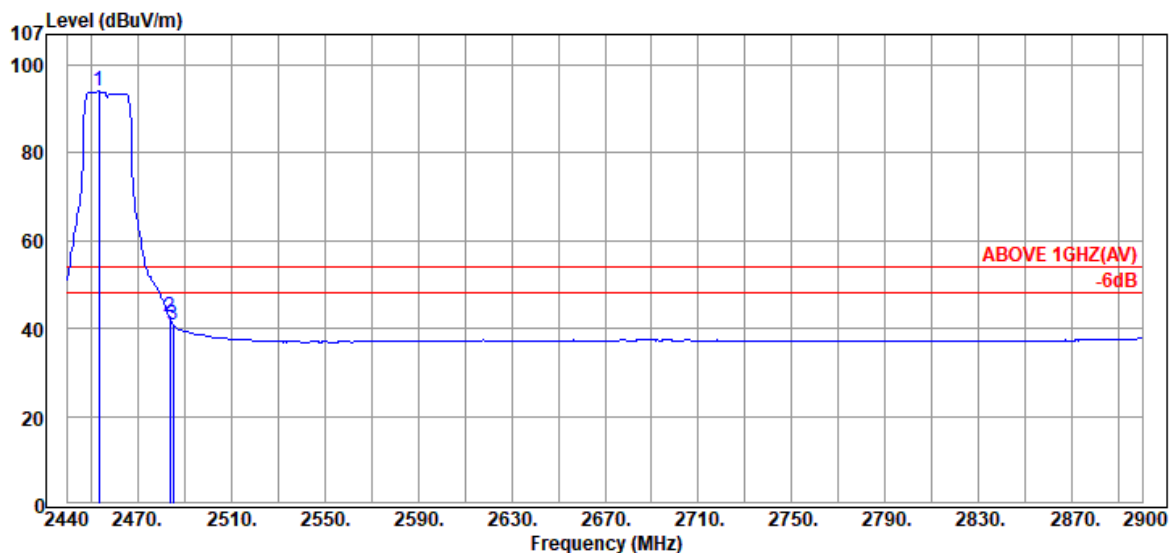

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.34	28.52	6.10	59.47	94.09	---	---	Average
2483.70	28.70	6.13	7.77	42.60	54.00	11.40	Average
2485.08	28.71	6.13	6.09	40.93	54.00	13.07	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

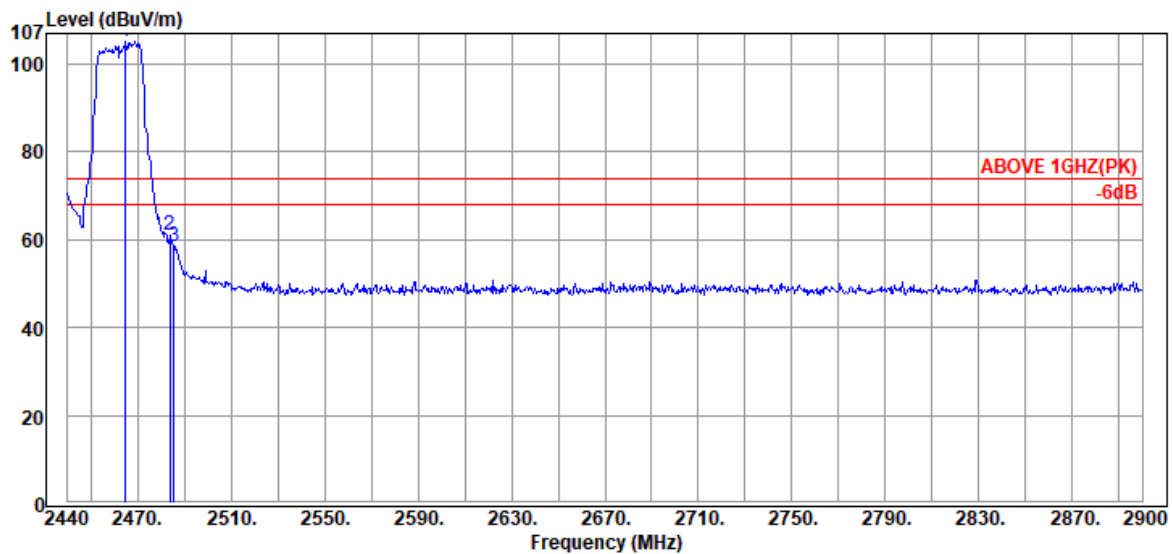

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.84	28.59	6.11	70.60	105.30	---	---	Peak
2483.70	28.70	6.13	26.35	61.18	74.00	12.82	Peak
2485.54	28.71	6.13	23.80	58.64	74.00	15.36	Peak

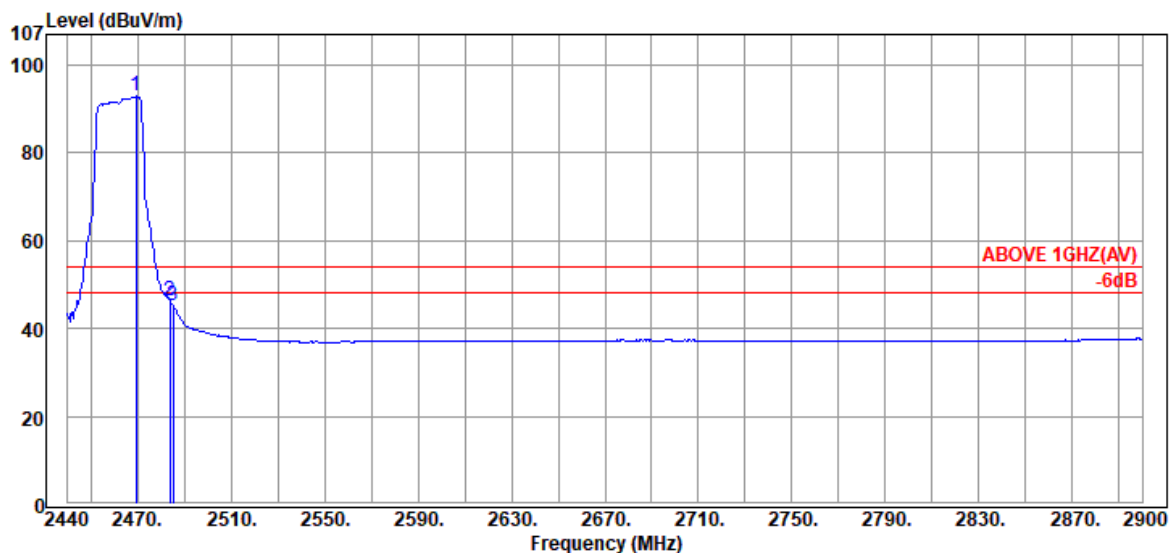

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.44	28.62	6.12	58.11	92.85	---	---	Average
2483.70	28.70	6.13	11.50	46.33	54.00	7.67	Average
2485.08	28.71	6.13	10.42	45.26	54.00	8.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

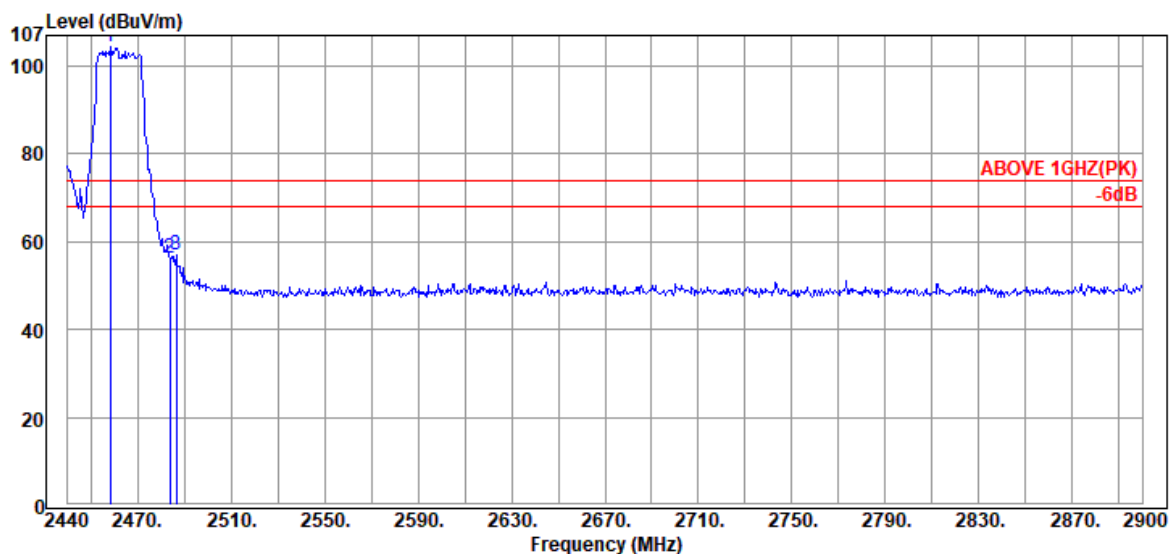

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.40	28.55	6.10	69.91	104.56	---	---	Peak
2483.70	28.70	6.13	21.32	56.15	74.00	17.85	Peak
2486.46	28.72	6.13	22.27	57.12	74.00	16.88	Peak

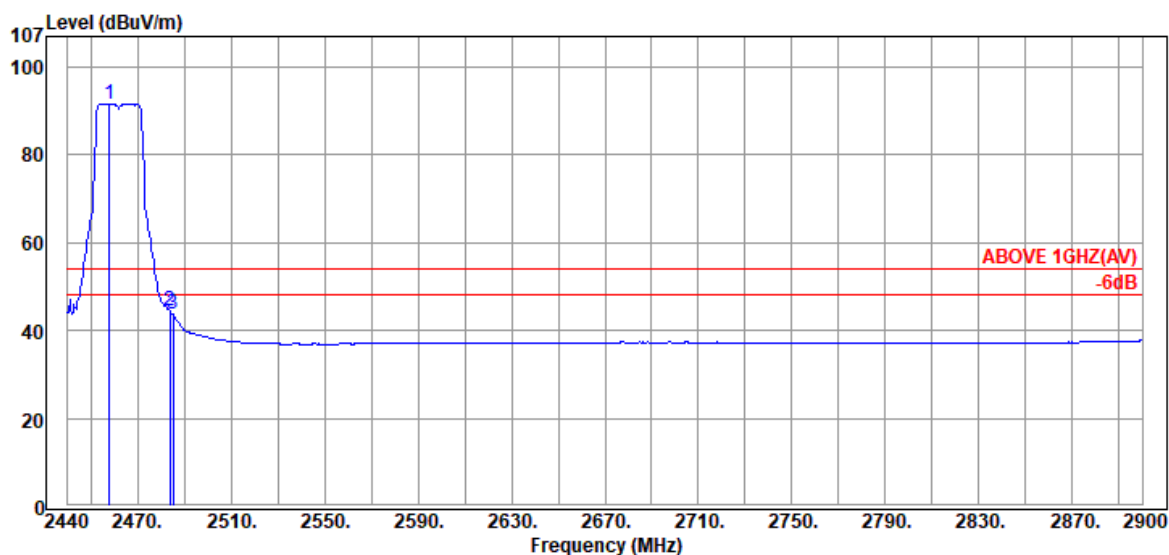

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.94	28.55	6.10	57.07	91.72	---	---	Average
2483.70	28.70	6.13	9.56	44.39	54.00	9.61	Average
2485.08	28.71	6.13	8.77	43.61	54.00	10.39	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

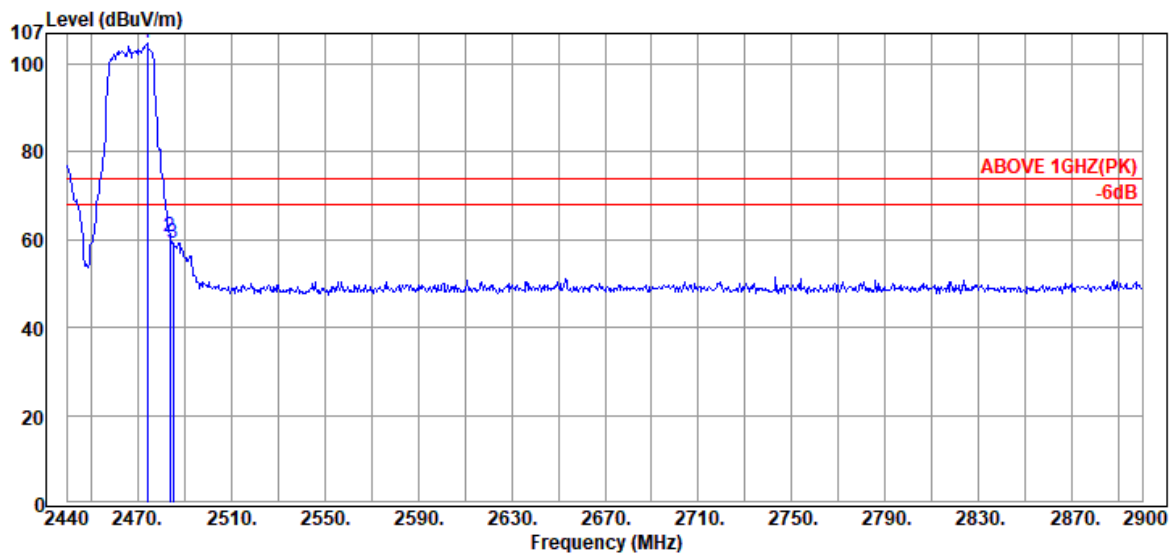

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.04	28.64	6.12	70.06	104.82	---	---	Peak
2483.70	28.70	6.13	25.72	60.55	74.00	13.45	Peak
2485.08	28.71	6.13	24.52	59.36	74.00	14.64	Peak

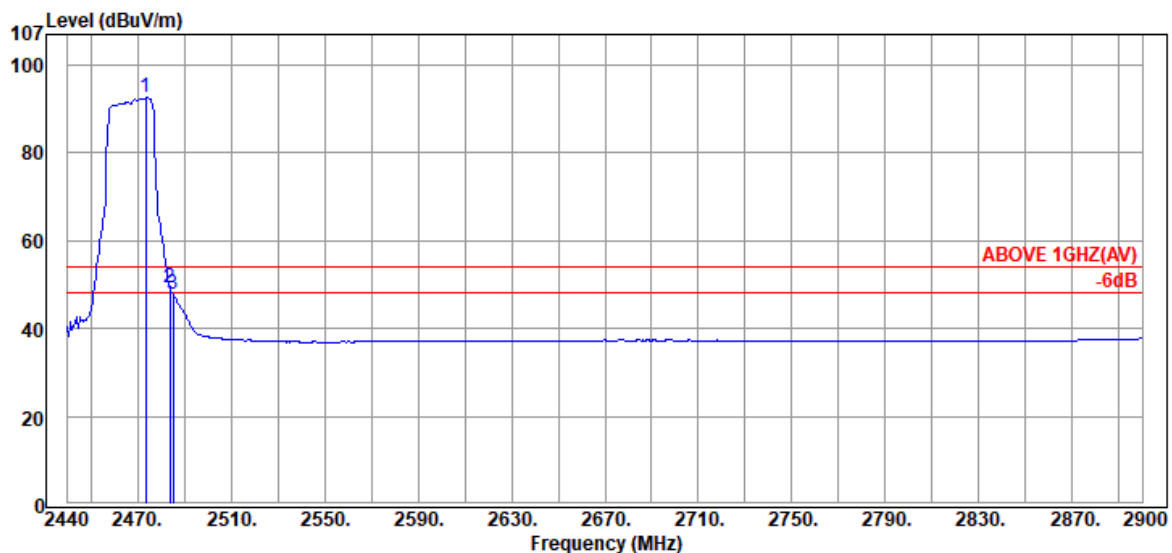

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.58	28.64	6.12	57.73	92.49	---	---	Average
2483.70	28.70	6.13	14.44	49.27	54.00	4.73	Average
2485.08	28.71	6.13	12.81	47.65	54.00	6.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

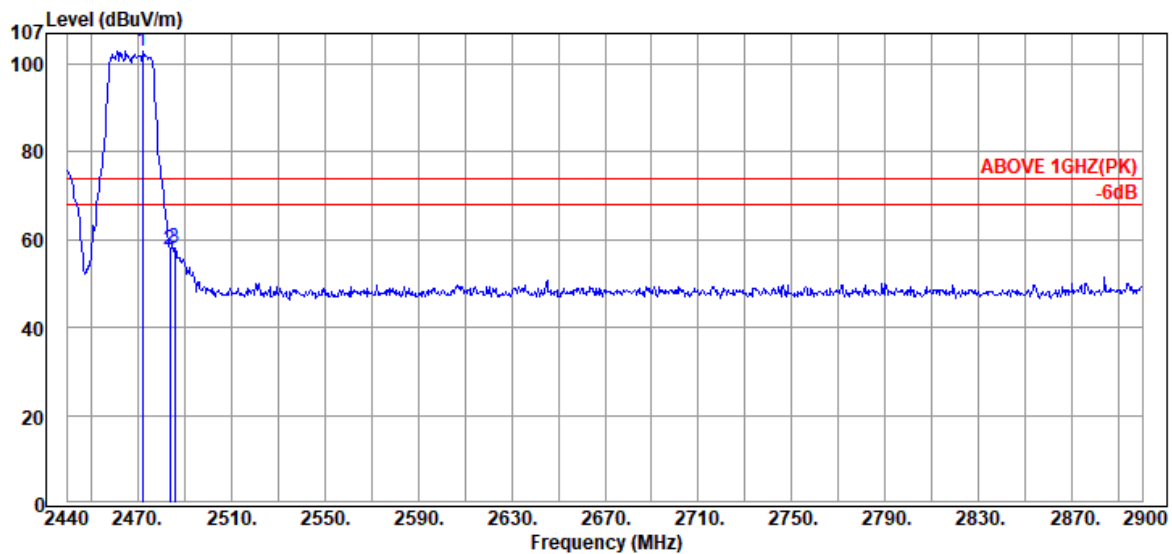

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.20	28.63	6.12	68.26	103.01	---	---	Peak
2483.70	28.70	6.13	22.73	57.56	74.00	16.44	Peak
2486.00	28.72	6.13	23.23	58.08	74.00	15.92	Peak

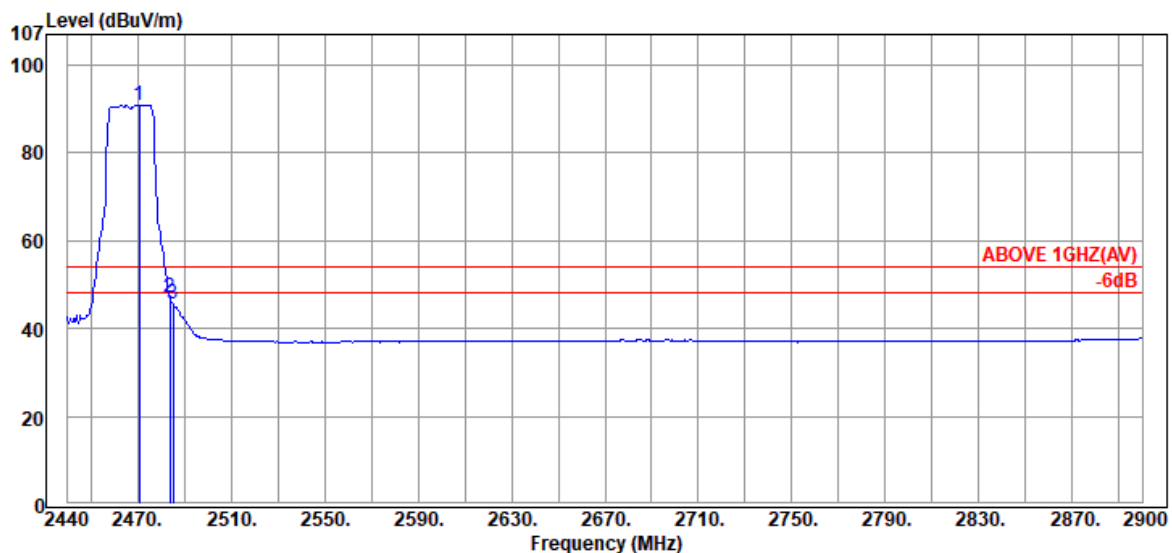

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.82	28.62	6.12	56.16	90.90	---	---	Average
2483.70	28.70	6.13	12.34	47.17	54.00	6.83	Average
2485.08	28.71	6.13	10.83	45.67	54.00	8.33	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

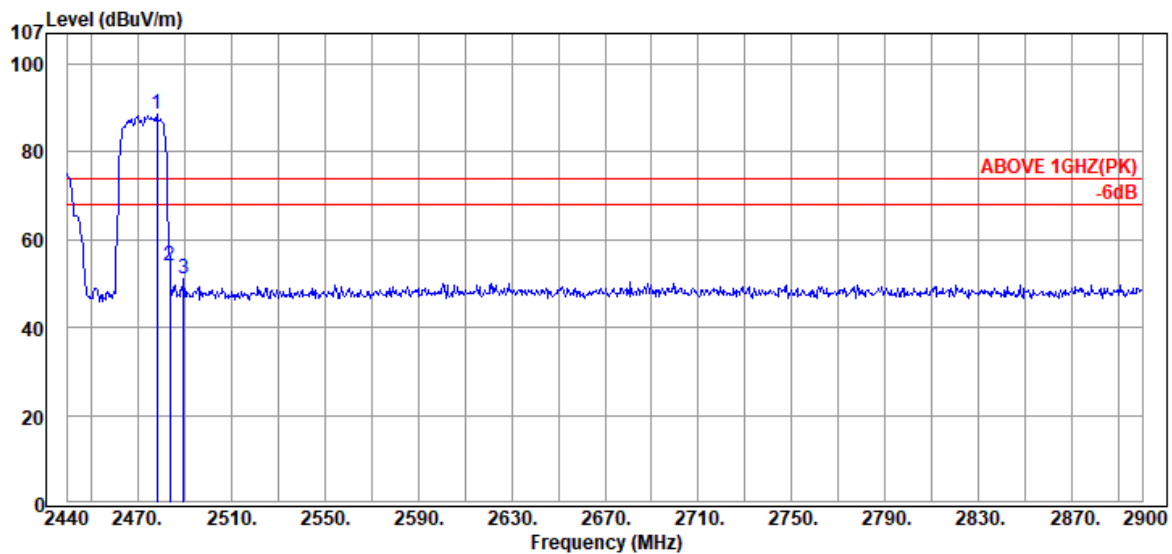

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.18	28.67	6.13	53.69	88.49	---	---	Peak
2483.70	28.70	6.13	19.30	54.13	74.00	19.87	Peak
2489.68	28.74	6.14	16.13	51.01	74.00	22.99	Peak

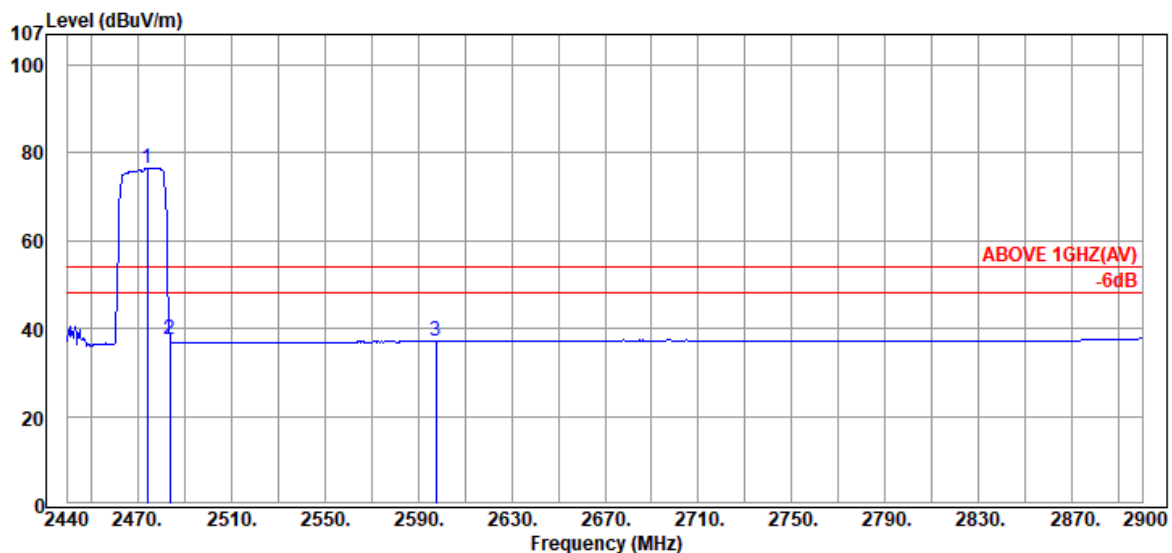

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.04	28.64	6.12	41.77	76.53	---	---	Average
2483.70	28.70	6.13	2.71	37.54	54.00	16.46	Average
2597.78	29.09	6.28	1.82	37.19	54.00	16.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

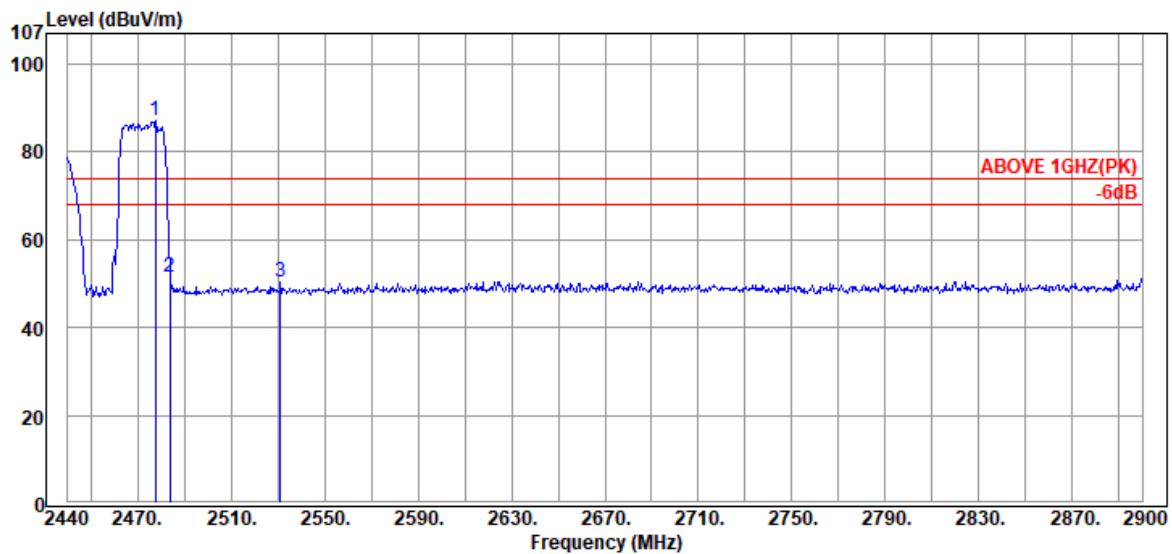

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.72	28.67	6.13	52.27	87.07	---	---	Peak
2483.70	28.70	6.13	16.68	51.51	74.00	22.49	Peak
2531.08	28.86	6.19	15.18	50.23	74.00	23.77	Peak

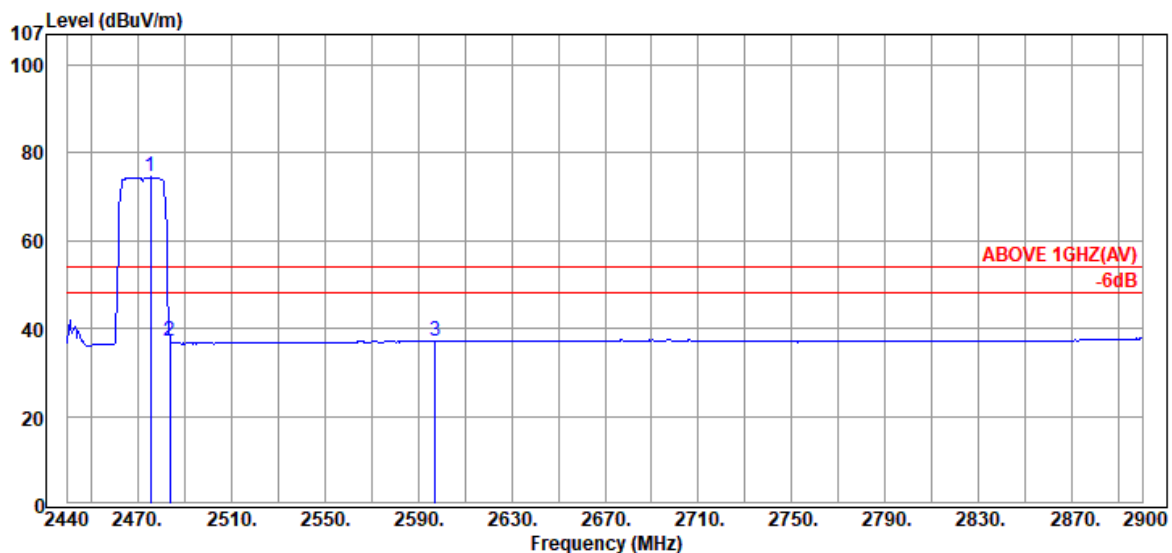

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.42	28.65	6.12	39.72	74.49	---	---	Average
2483.70	28.70	6.13	2.39	37.22	54.00	16.78	Average
2597.32	29.09	6.28	1.81	37.18	54.00	16.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

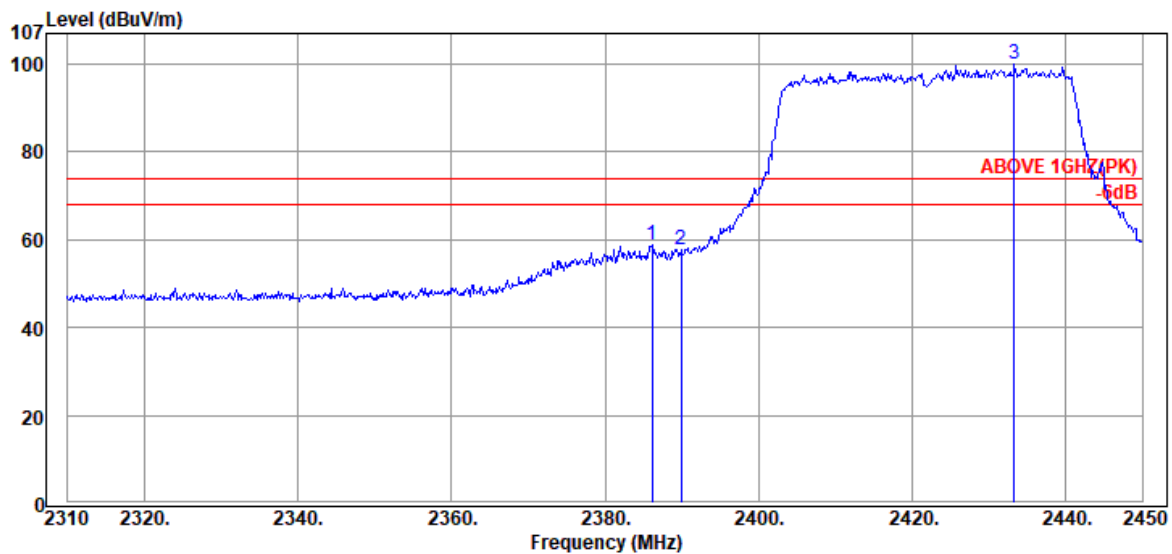

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.16	28.29	6.02	24.60	58.91	74.00	15.09	Peak
2389.94	28.32	6.02	23.33	57.67	74.00	16.33	Peak
@ 2433.34	28.47	6.07	65.45	99.99	---	---	Peak

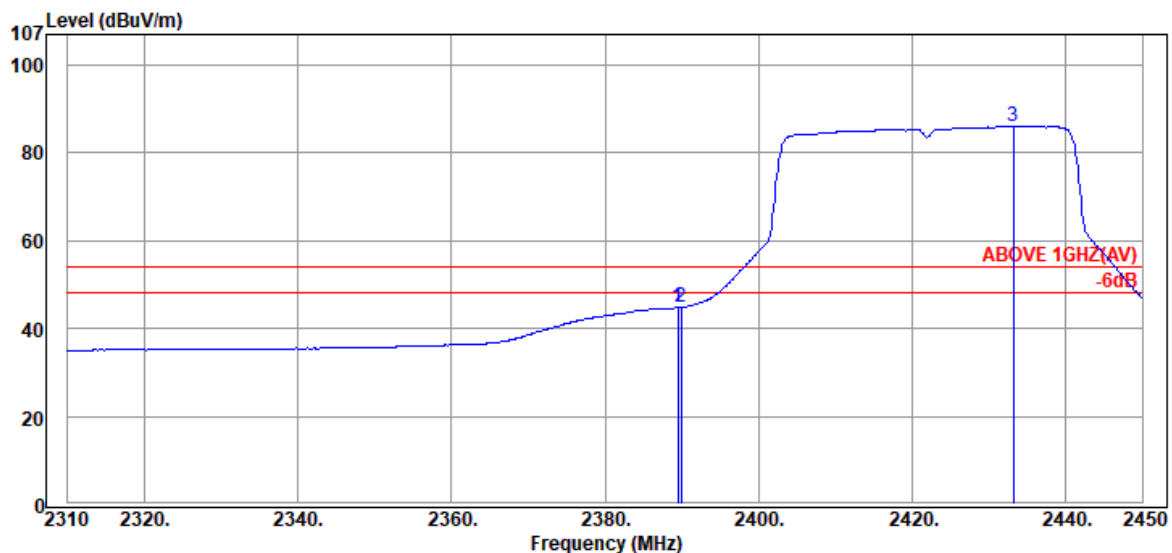

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	10.54	44.88	54.00	9.12	Average
2389.94	28.32	6.02	10.55	44.89	54.00	9.11	Average
@ 2433.20	28.47	6.07	51.66	86.20	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

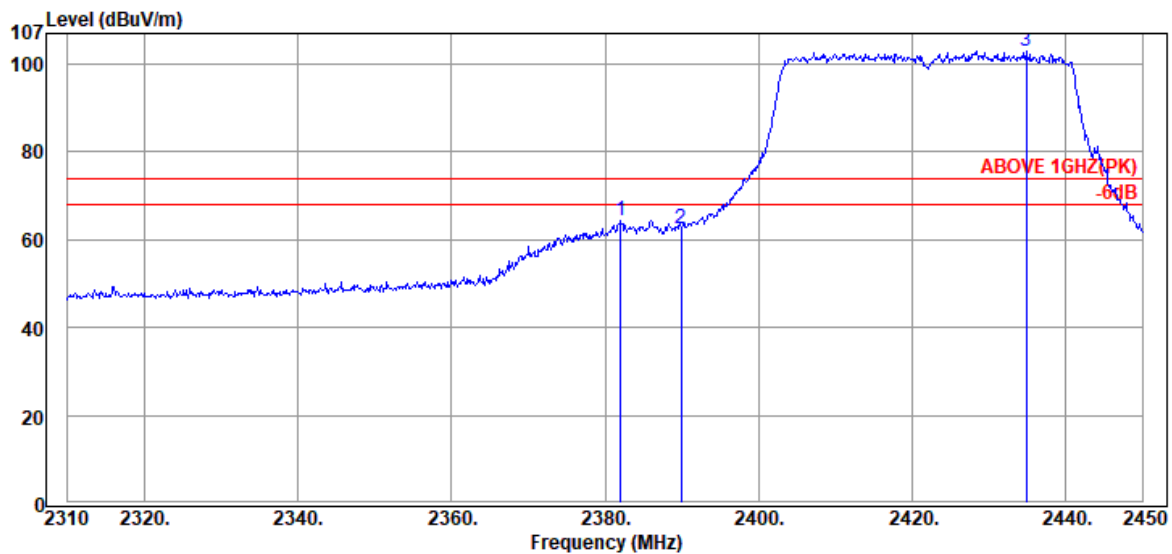

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.10	28.26	6.02	29.93	64.21	74.00	9.79	Peak
2389.94	28.32	6.02	28.25	62.59	74.00	11.41	Peak
@ 2434.88	28.47	6.08	68.40	102.95	---	---	Peak

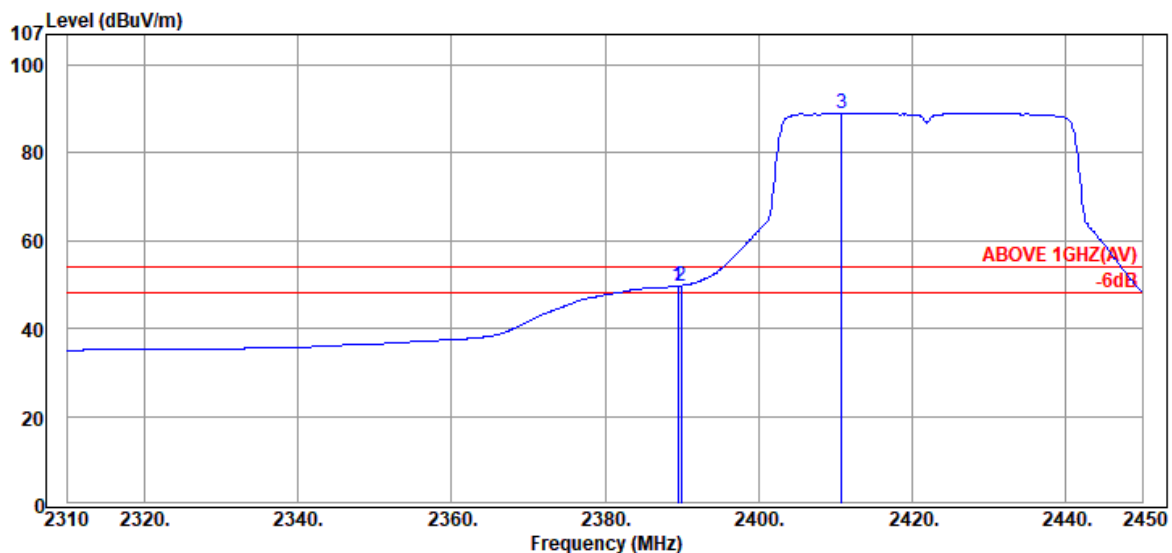

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	15.24	49.58	54.00	4.42	Average
2389.94	28.32	6.02	15.43	49.77	54.00	4.23	Average
@ 2410.80	28.42	6.05	54.64	89.11	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

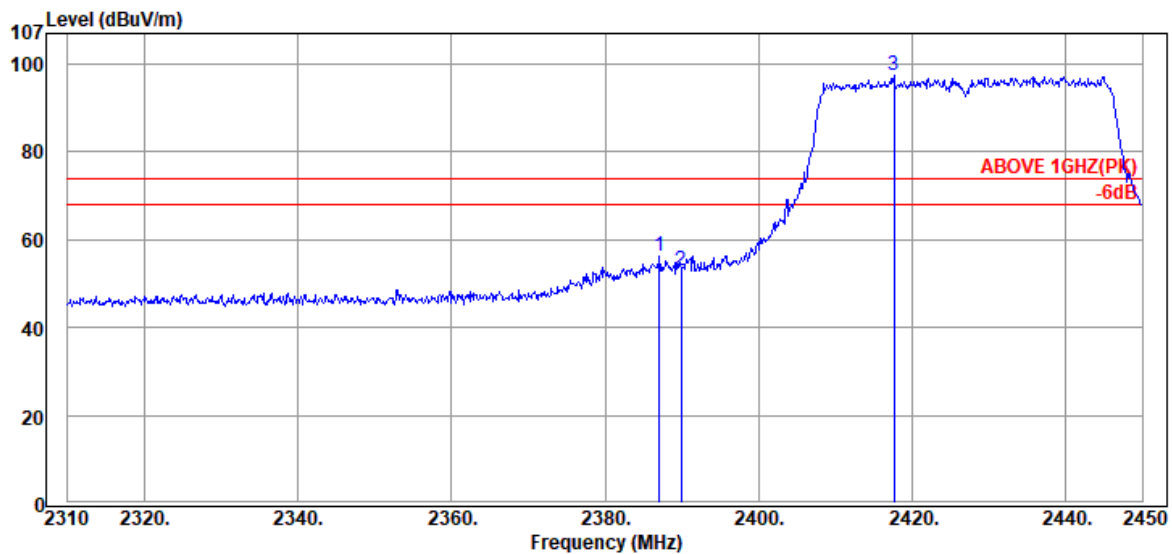

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.14	28.30	6.02	21.83	56.15	74.00	17.85	Peak
2389.94	28.32	6.02	18.72	53.06	74.00	20.94	Peak
@ 2417.66	28.44	6.06	62.76	97.26	---	---	Peak

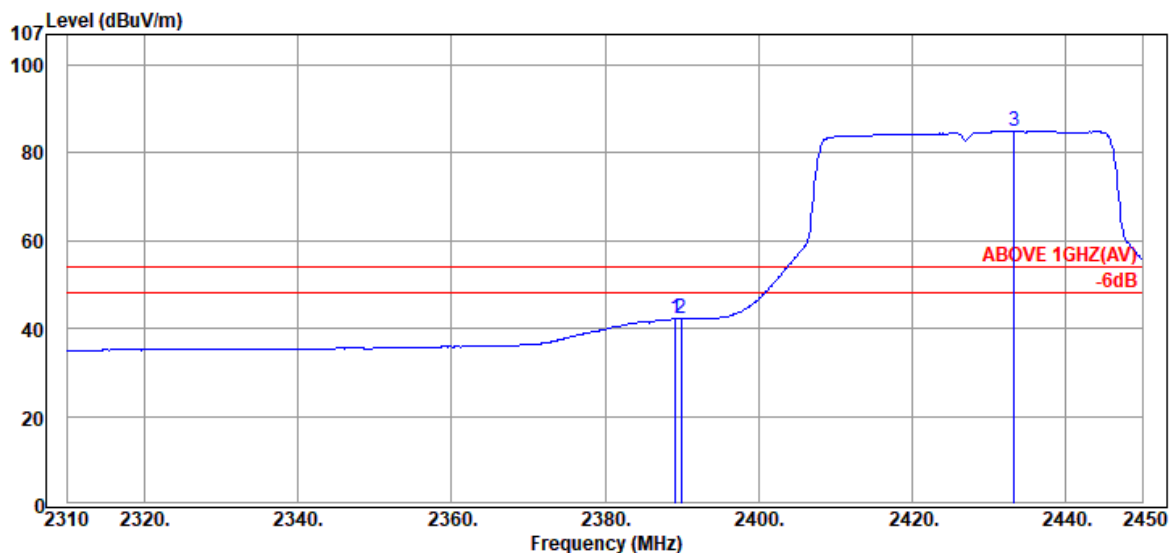

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.24	28.31	6.02	7.93	42.26	54.00	11.74	Average
2389.94	28.32	6.02	7.90	42.24	54.00	11.76	Average
@ 2433.34	28.47	6.07	50.44	84.98	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

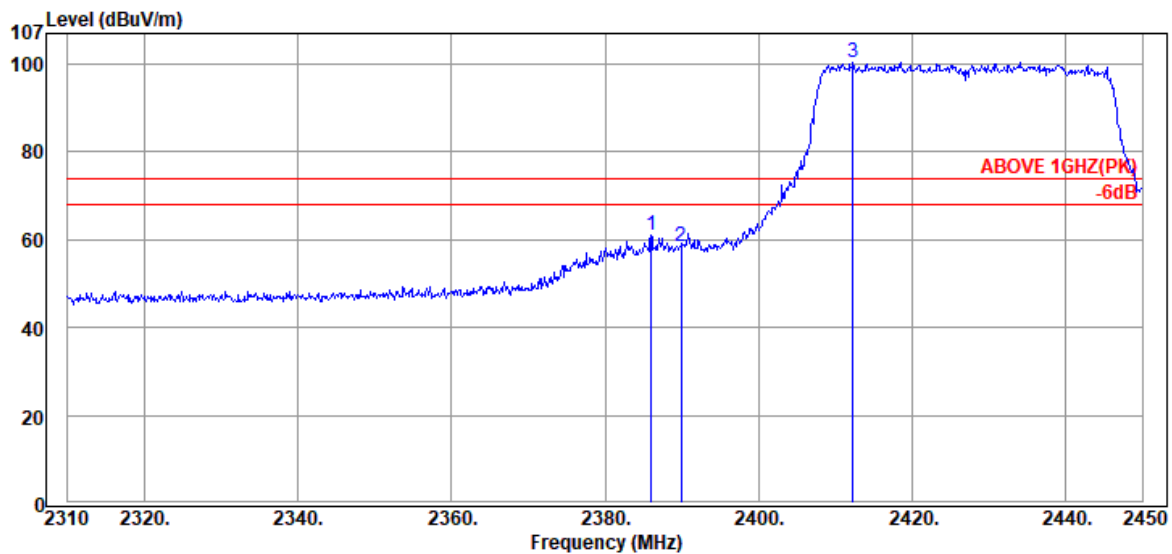

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.02	28.29	6.02	26.64	60.95	74.00	13.05	Peak
2389.94	28.32	6.02	23.95	58.29	74.00	15.71	Peak
@ 2412.34	28.42	6.05	65.95	100.42	---	---	Peak

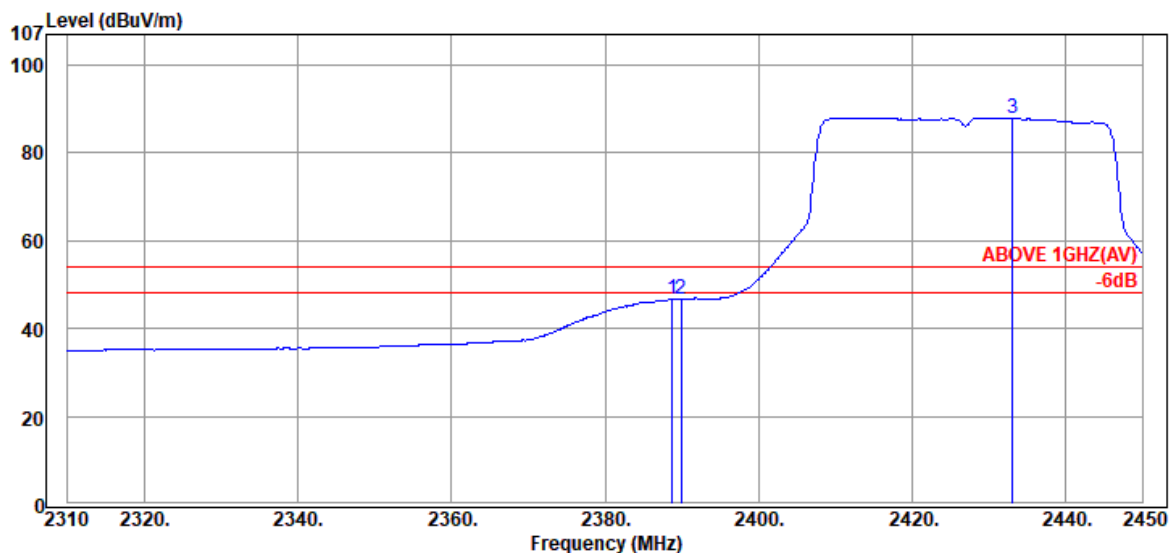

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.82	28.31	6.02	12.33	46.66	54.00	7.34	Average
2389.94	28.32	6.02	12.26	46.60	54.00	7.40	Average
@ 2433.06	28.47	6.07	53.49	88.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

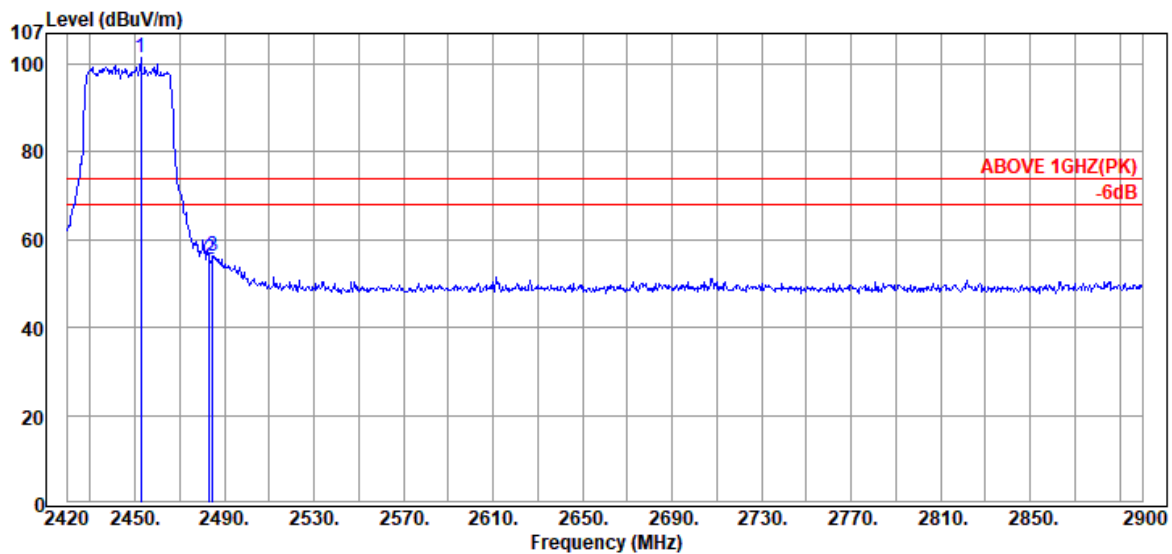

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.64	28.52	6.10	66.78	101.40	---	---	Peak
2483.36	28.70	6.13	20.67	55.50	74.00	18.50	Peak
2484.80	28.71	6.13	21.40	56.24	74.00	17.76	Peak

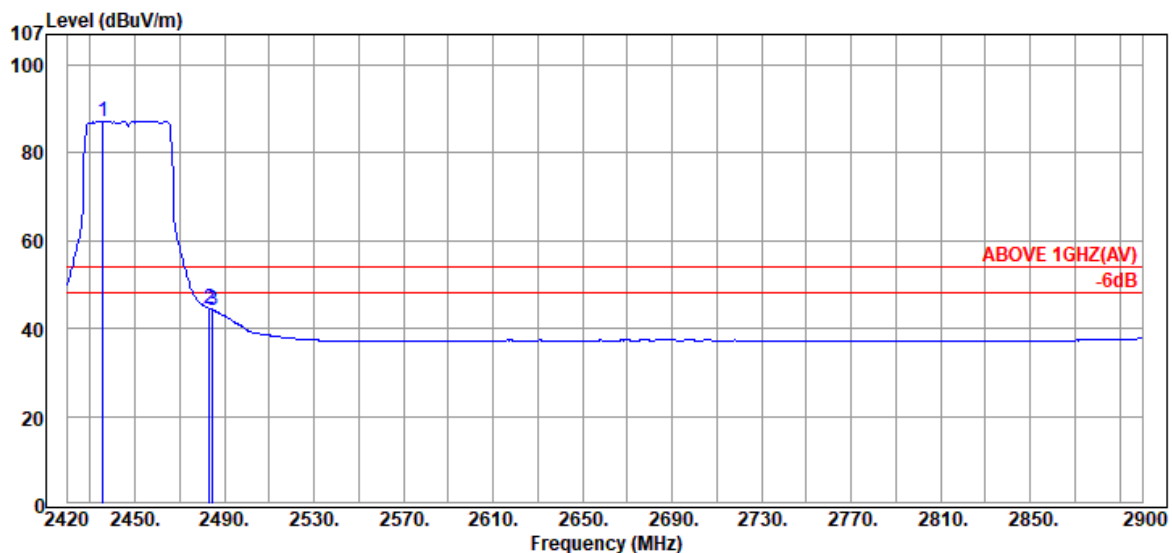

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2435.84	28.47	6.08	52.75	87.30	---	---	Average
2483.36	28.70	6.13	9.75	44.58	54.00	9.42	Average
2484.80	28.71	6.13	9.39	44.23	54.00	9.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

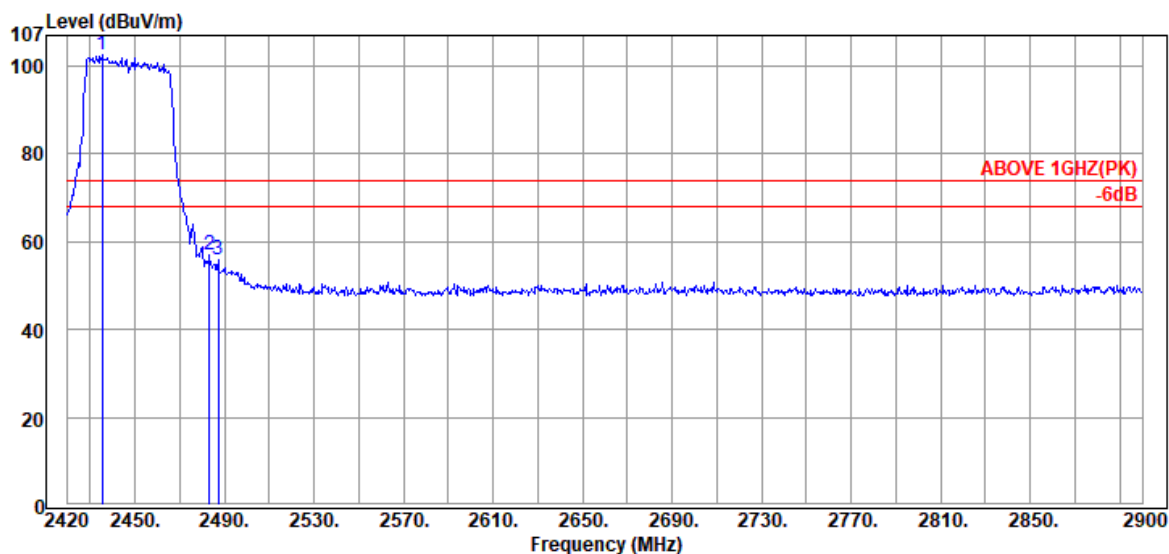

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2435.36	28.47	6.08	68.04	102.59	---	---	Peak
2483.36	28.70	6.13	22.28	57.11	74.00	16.89	Peak
2487.20	28.72	6.14	20.86	55.72	74.00	18.28	Peak

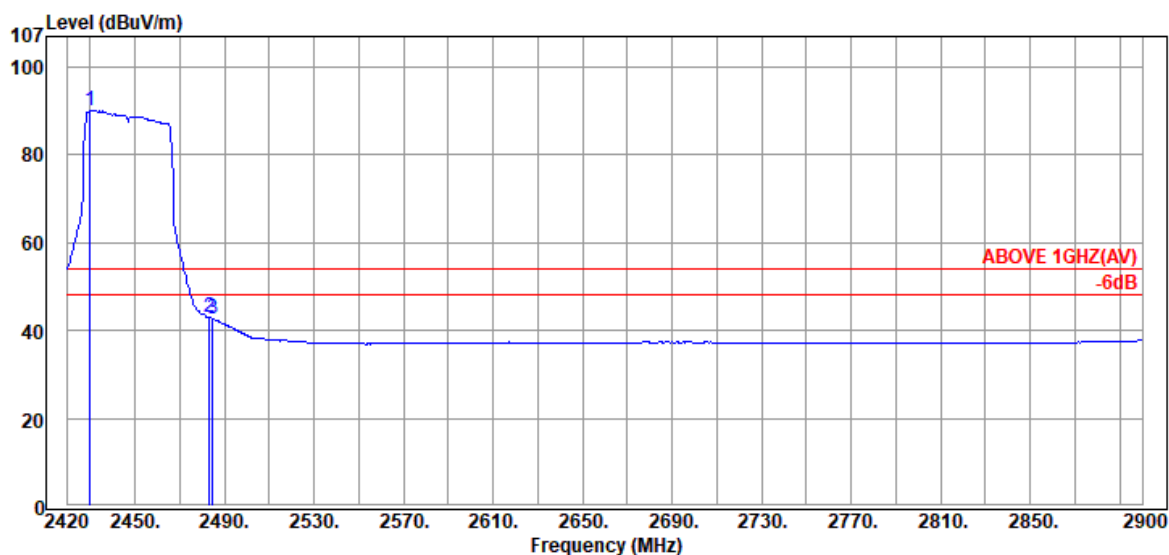

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2430.08	28.46	6.07	55.63	90.16	---	---	Average
2483.36	28.70	6.13	8.11	42.94	54.00	11.06	Average
2484.80	28.71	6.13	7.81	42.65	54.00	11.35	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

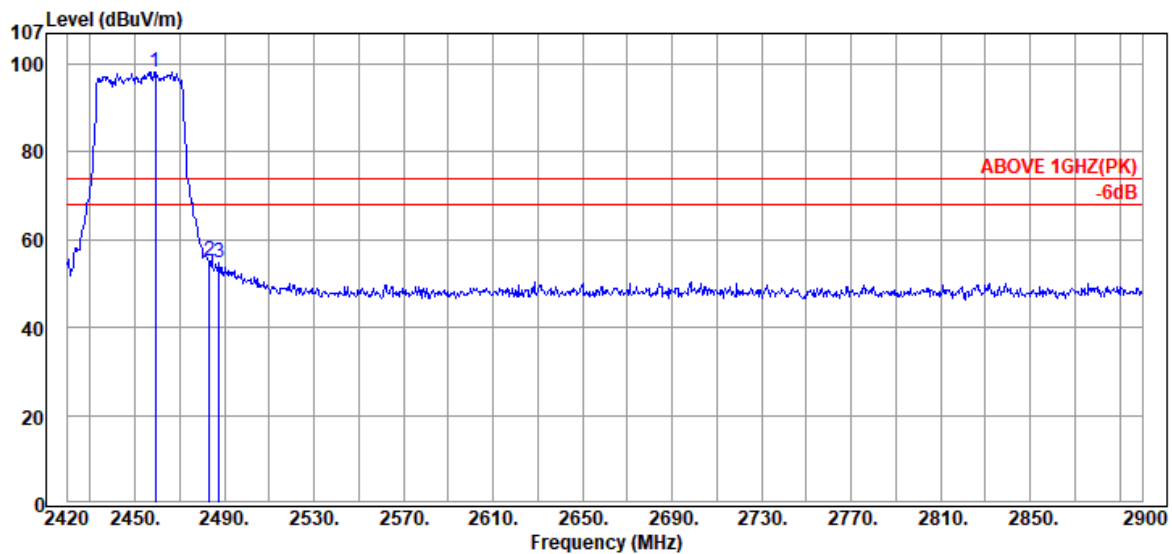

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.36	28.56	6.10	63.68	98.34	---	---	Peak
2483.36	28.70	6.13	20.45	55.28	74.00	18.72	Peak
2487.68	28.73	6.14	19.82	54.69	74.00	19.31	Peak

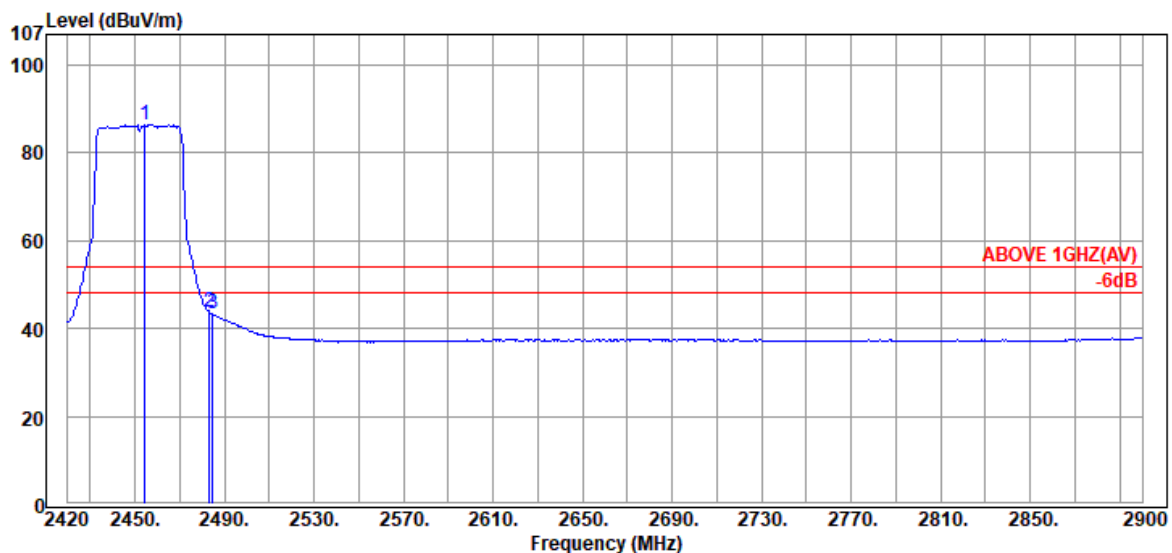

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.56	28.53	6.10	51.78	86.41	---	---	Average
2483.36	28.70	6.13	8.82	43.65	54.00	10.35	Average
2484.80	28.71	6.13	8.37	43.21	54.00	10.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

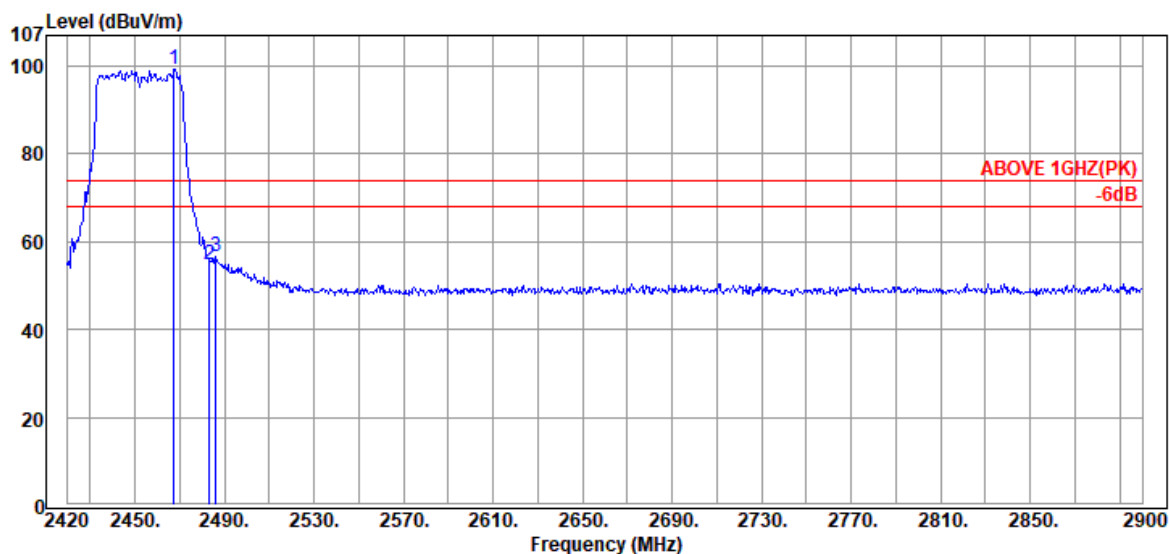

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.52	28.61	6.11	64.52	99.24	---	---	Peak
2483.36	28.70	6.13	20.03	54.86	74.00	19.14	Peak
2486.24	28.72	6.13	21.81	56.66	74.00	17.34	Peak

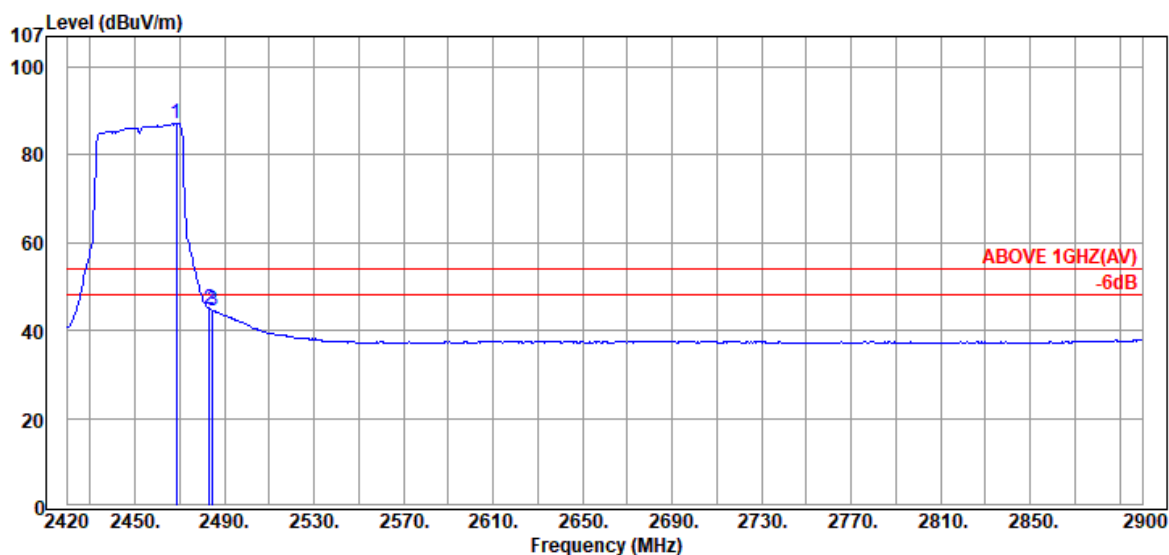

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.48	28.61	6.11	52.51	87.23	---	---	Average
2483.36	28.70	6.13	10.08	44.91	54.00	9.09	Average
2484.80	28.71	6.13	9.69	44.53	54.00	9.47	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

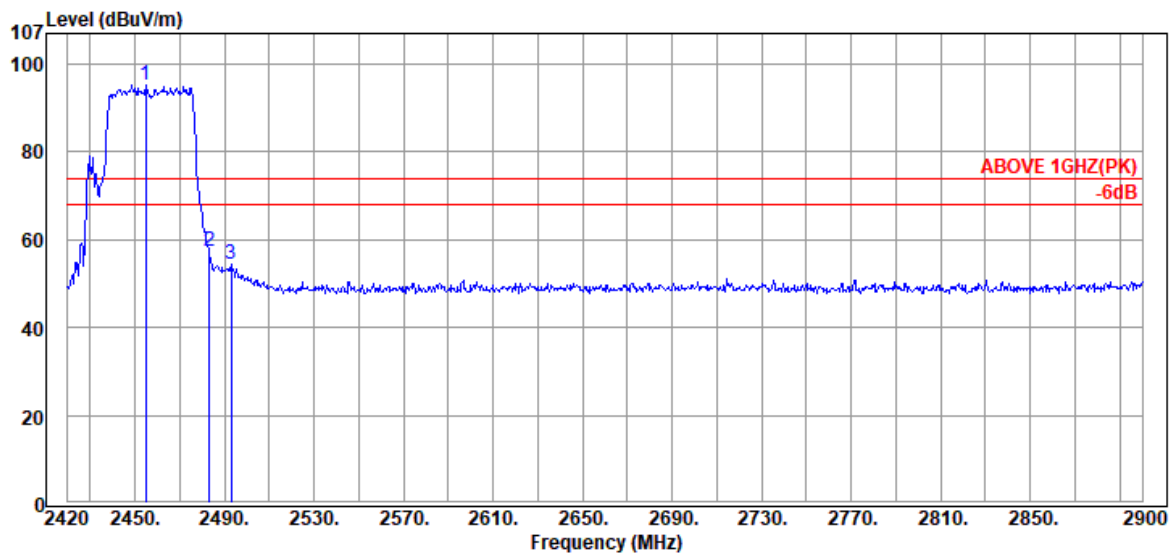

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.04	28.53	6.10	60.48	95.11	---	---	Peak
2483.36	28.70	6.13	22.35	57.18	74.00	16.82	Peak
2492.96	28.76	6.14	19.59	54.49	74.00	19.51	Peak

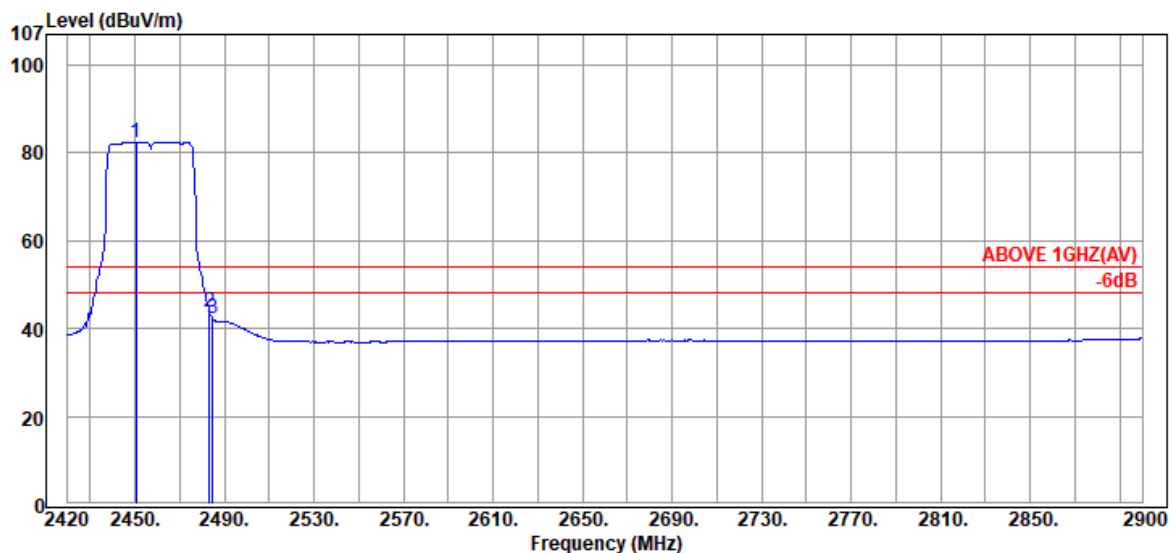

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.72	28.50	6.09	47.95	82.54	---	---	Average
2483.36	28.70	6.13	9.00	43.83	54.00	10.17	Average
2484.80	28.71	6.13	7.28	42.12	54.00	11.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

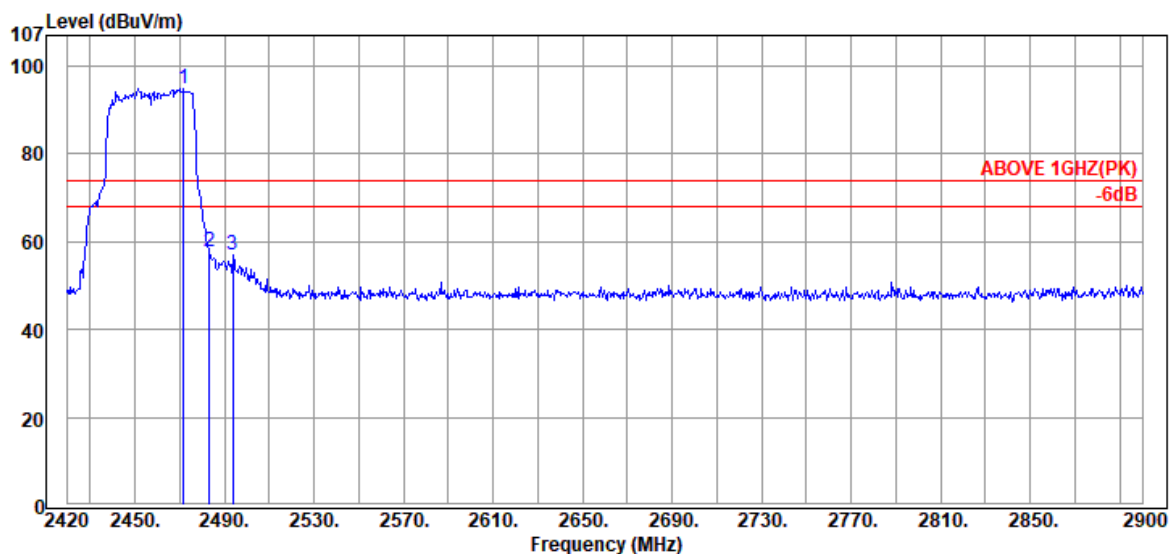

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.84	28.63	6.12	60.28	95.03	---	---	Peak
2483.36	28.70	6.13	22.89	57.72	74.00	16.28	Peak
2493.92	28.76	6.14	22.00	56.90	74.00	17.10	Peak

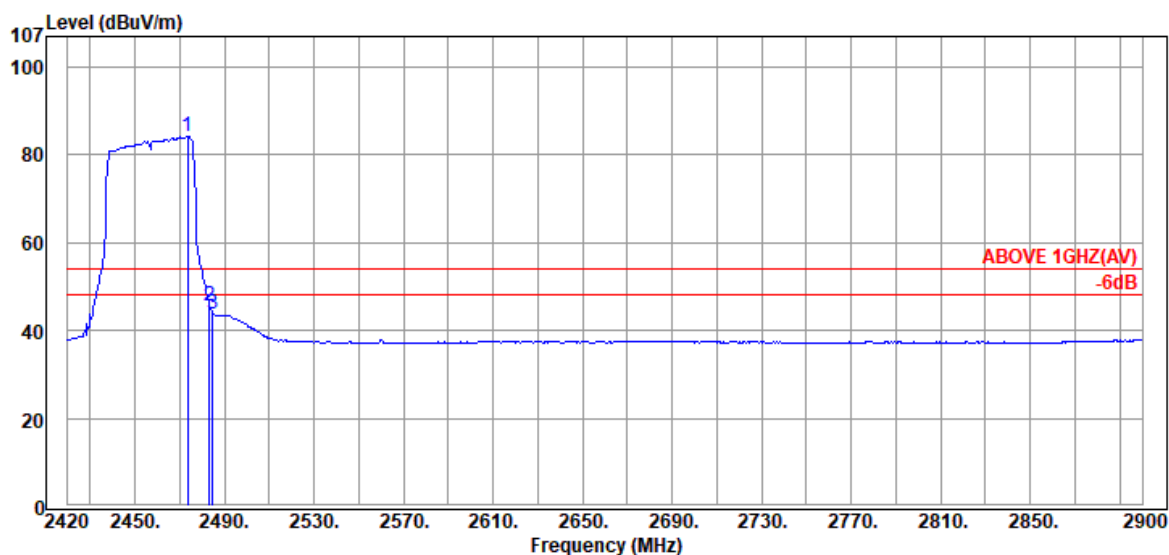

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.76	28.64	6.12	49.43	84.19	---	---	Average
2483.36	28.70	6.13	10.91	45.74	54.00	8.26	Average
2484.80	28.71	6.13	9.07	43.91	54.00	10.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

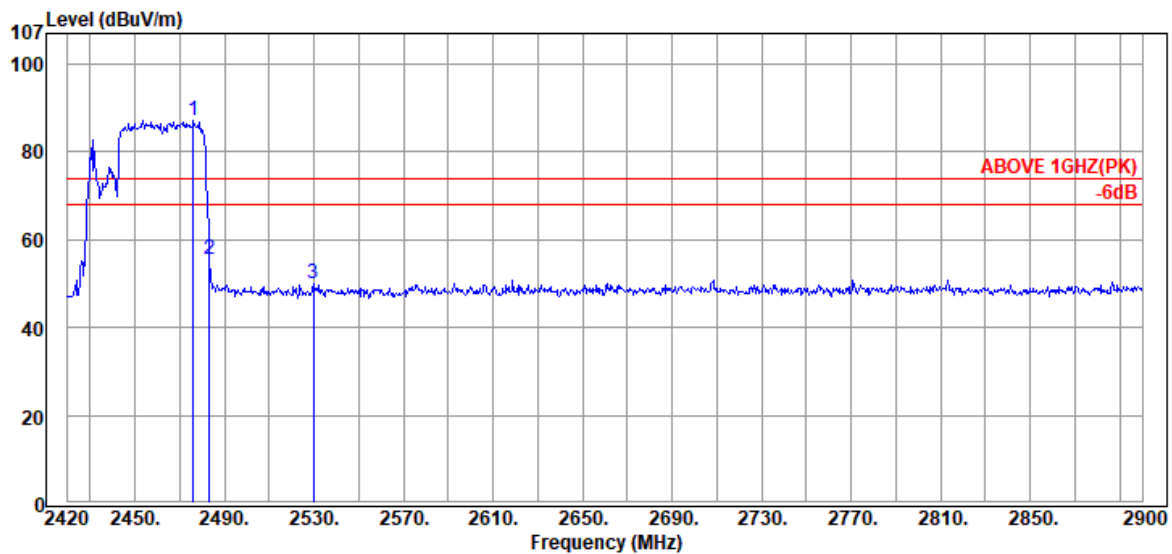

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.16	28.66	6.12	52.42	87.20	---	---	Peak
2483.36	28.70	6.13	20.71	55.54	74.00	18.46	Peak
2529.92	28.86	6.19	14.86	49.91	74.00	24.09	Peak

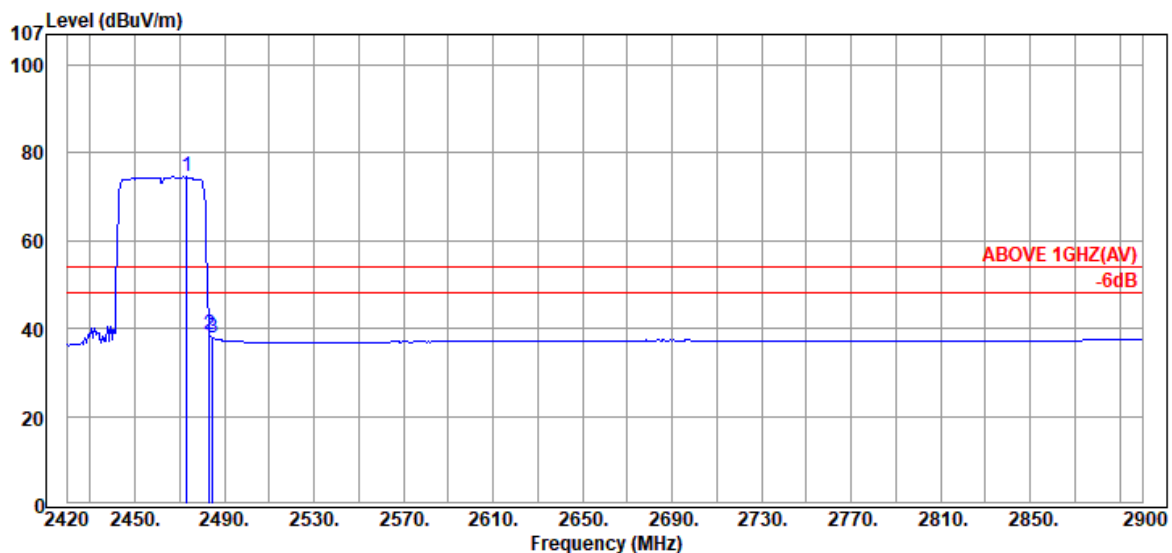

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.28	28.64	6.12	39.75	74.51	---	---	Average
2483.36	28.70	6.13	3.73	38.56	54.00	15.44	Average
2484.80	28.71	6.13	3.02	37.86	54.00	16.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

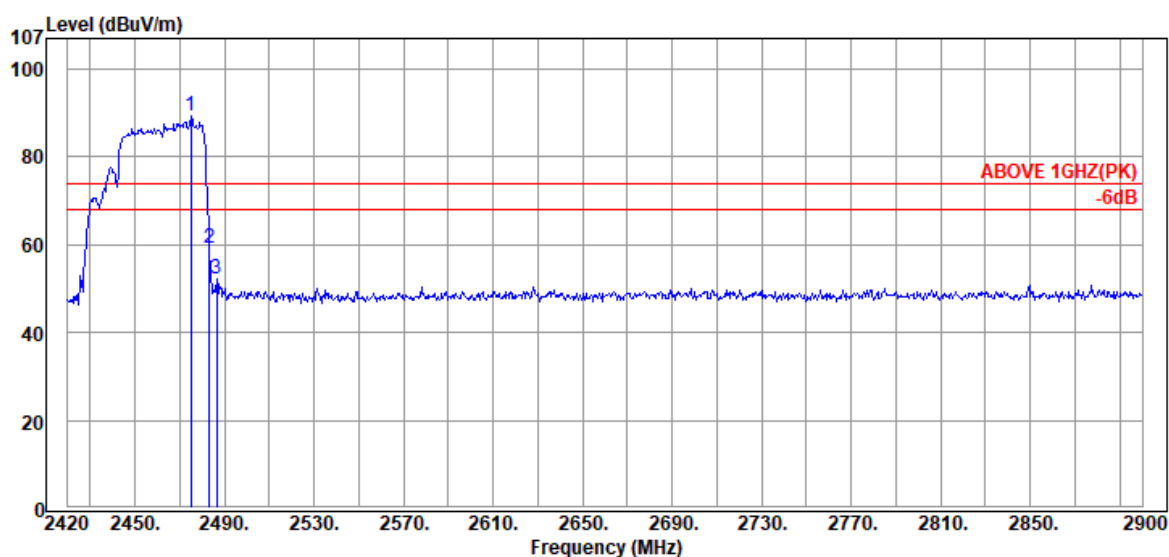

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.20	28.65	6.12	54.67	89.44	---	---	Peak
2483.36	28.70	6.13	24.36	59.19	74.00	14.81	Peak
2486.72	28.72	6.14	17.52	52.38	74.00	21.62	Peak

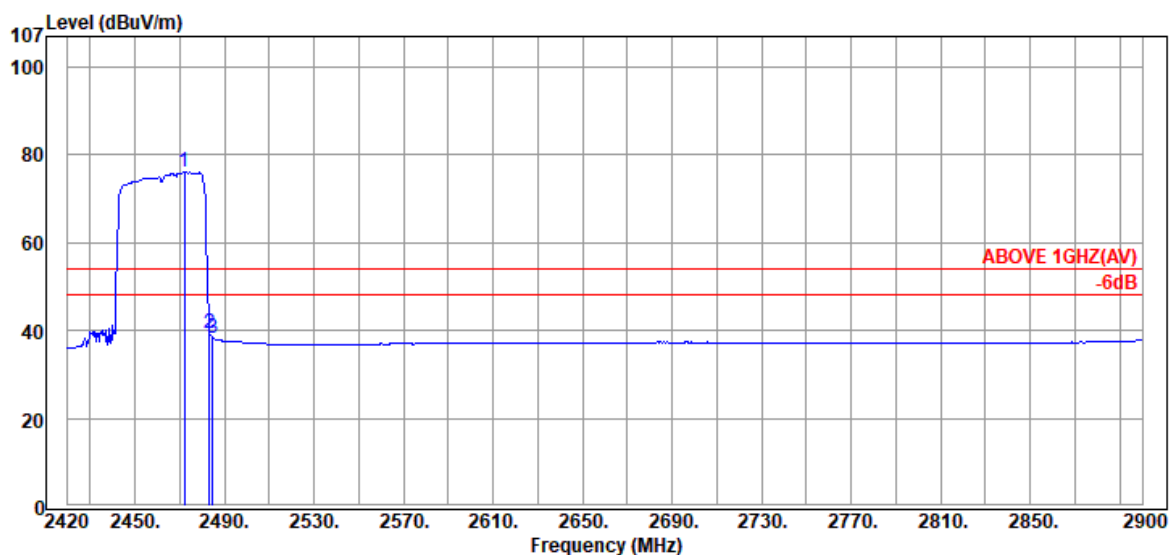

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.32	28.63	6.12	41.31	76.06	---	---	Average
2483.36	28.70	6.13	4.54	39.37	54.00	14.63	Average
2484.80	28.71	6.13	3.55	38.39	54.00	15.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

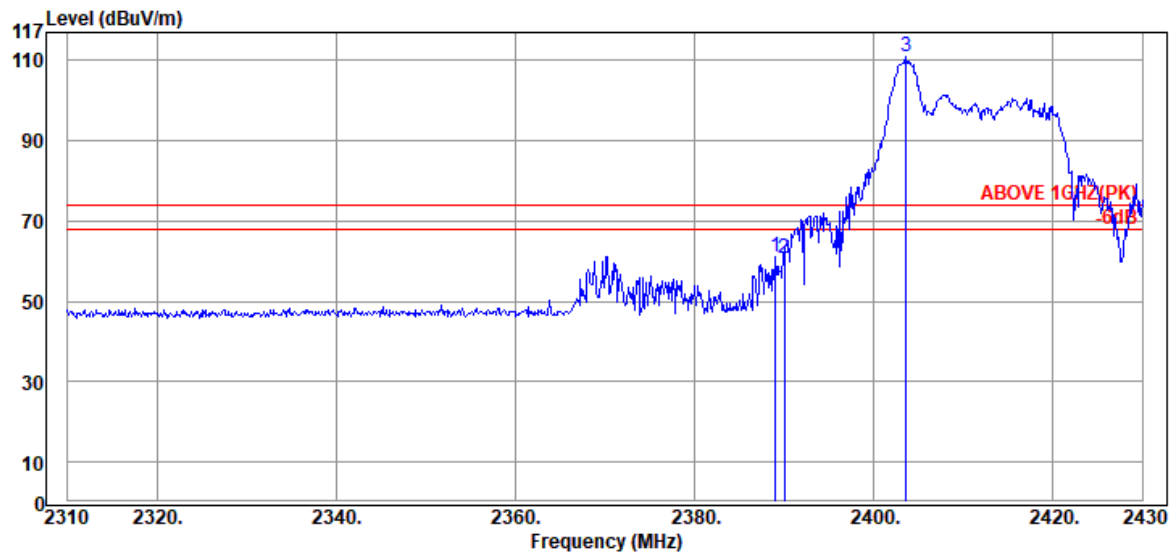

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.08	28.31	6.02	26.82	61.15	74.00	12.85	Peak
2390.04	28.32	6.03	26.52	60.87	74.00	13.13	Peak
@ 2403.60	28.41	6.04	76.53	110.98	---	---	Peak

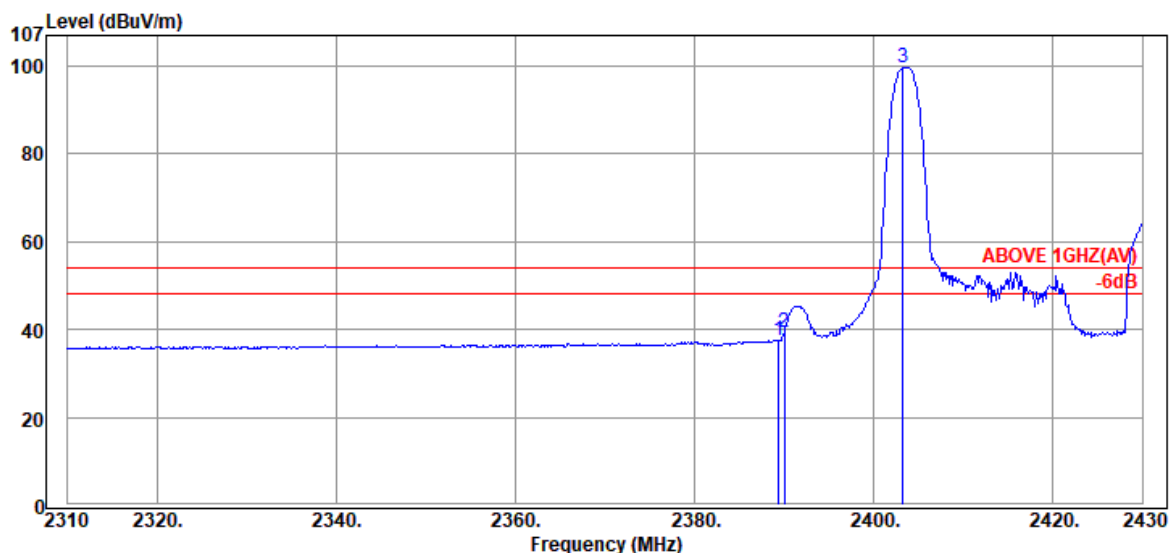

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	28.32	6.02	3.22	37.56	54.00	16.44	Average
2390.04	28.32	6.03	5.11	39.46	54.00	14.54	Average
@ 2403.24	28.41	6.04	65.32	99.77	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

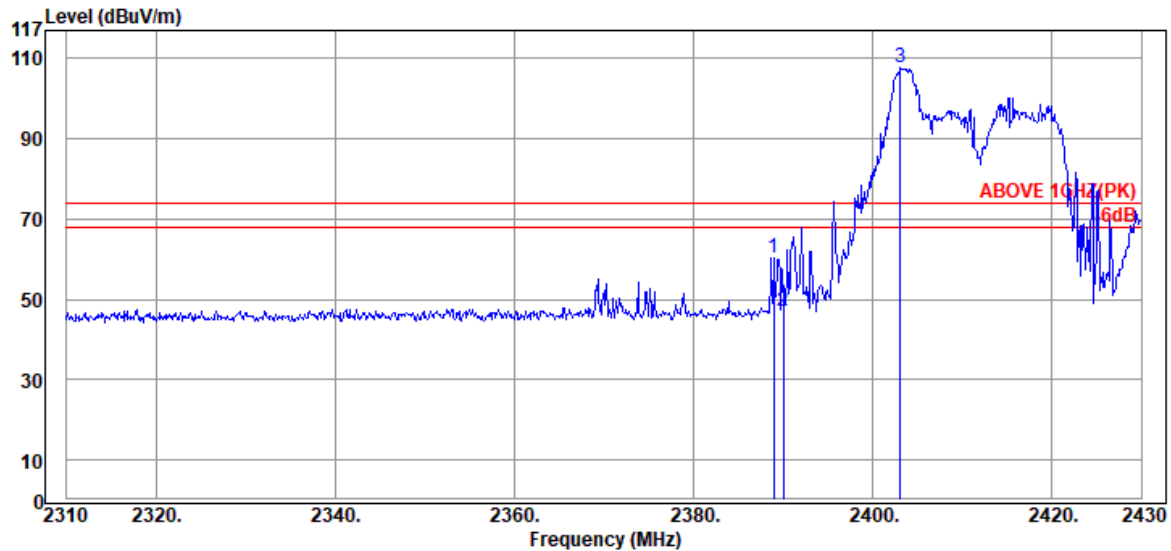

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.96	28.31	6.02	26.13	60.46	74.00	13.54	Peak
2390.04	28.32	6.03	12.59	46.94	74.00	27.06	Peak
@ 2403.12	28.41	6.04	73.39	107.84	---	---	Peak

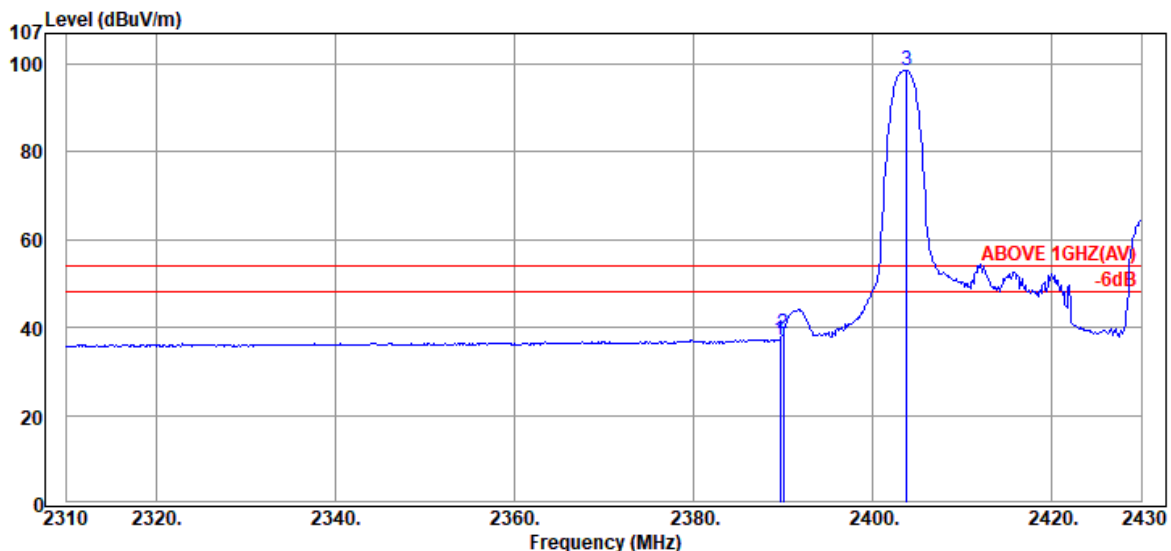

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	2.94	37.28	54.00	16.72	Average
2390.04	28.32	6.03	4.33	38.68	54.00	15.32	Average
@ 2403.84	28.41	6.04	64.13	98.58	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

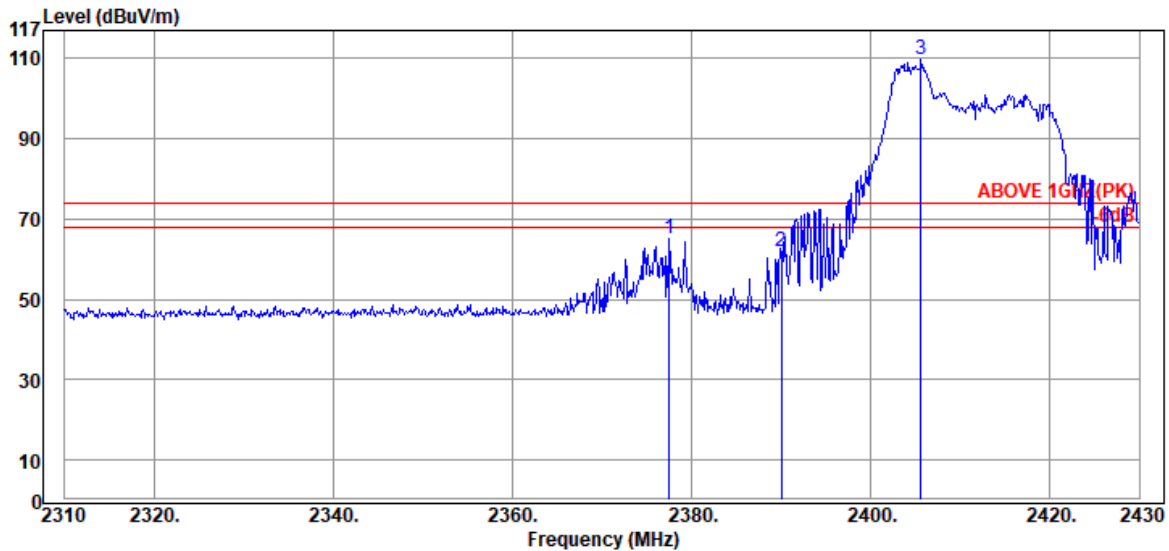

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.56	28.22	6.01	30.88	65.11	74.00	8.89	Peak
2390.04	28.32	6.03	27.61	61.96	74.00	12.04	Peak
@ 2405.64	28.41	6.04	75.17	109.62	---	---	Peak

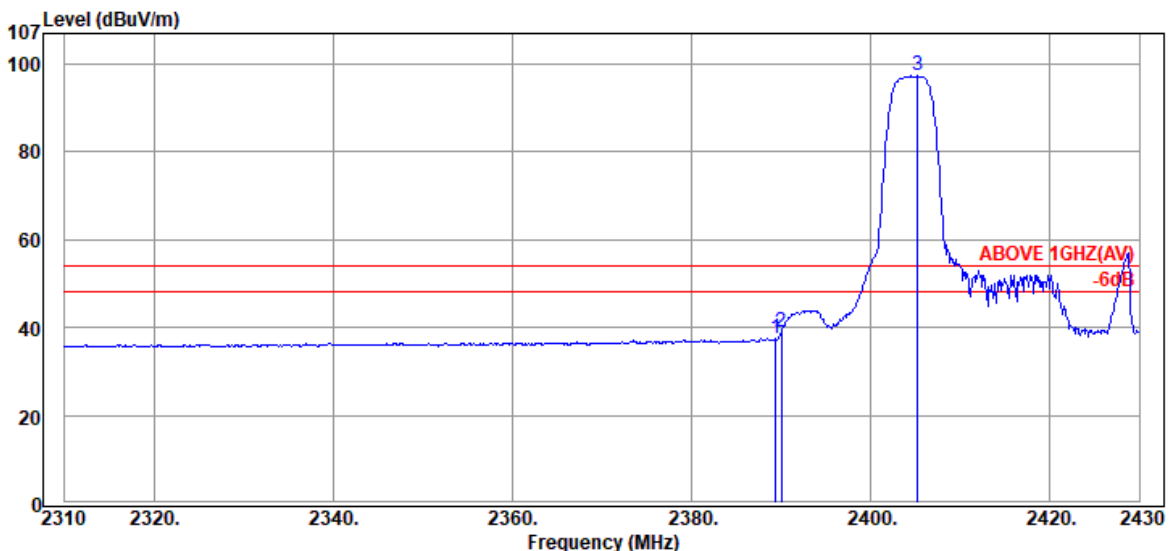

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	28.32	6.02	3.11	37.45	54.00	16.55	Average
2390.04	28.32	6.03	4.52	38.87	54.00	15.13	Average
@ 2405.28	28.41	6.04	62.85	97.30	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

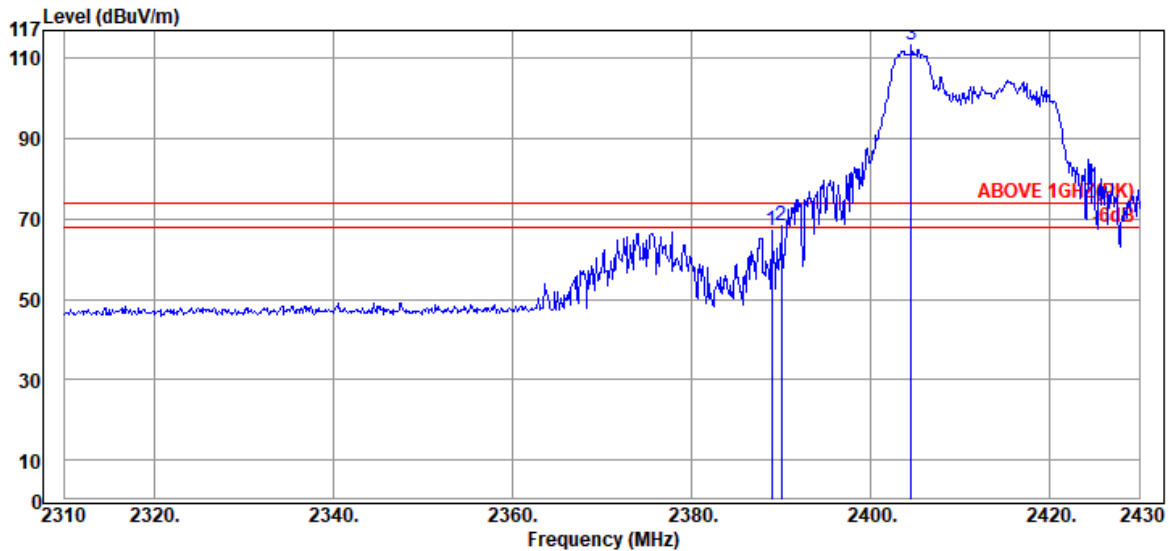

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.96	28.31	6.02	33.01	67.34	74.00	6.66	Peak
2390.04	28.32	6.03	34.01	68.36	74.00	5.64	Peak
@ 2404.56	28.41	6.04	78.78	113.23	---	---	Peak

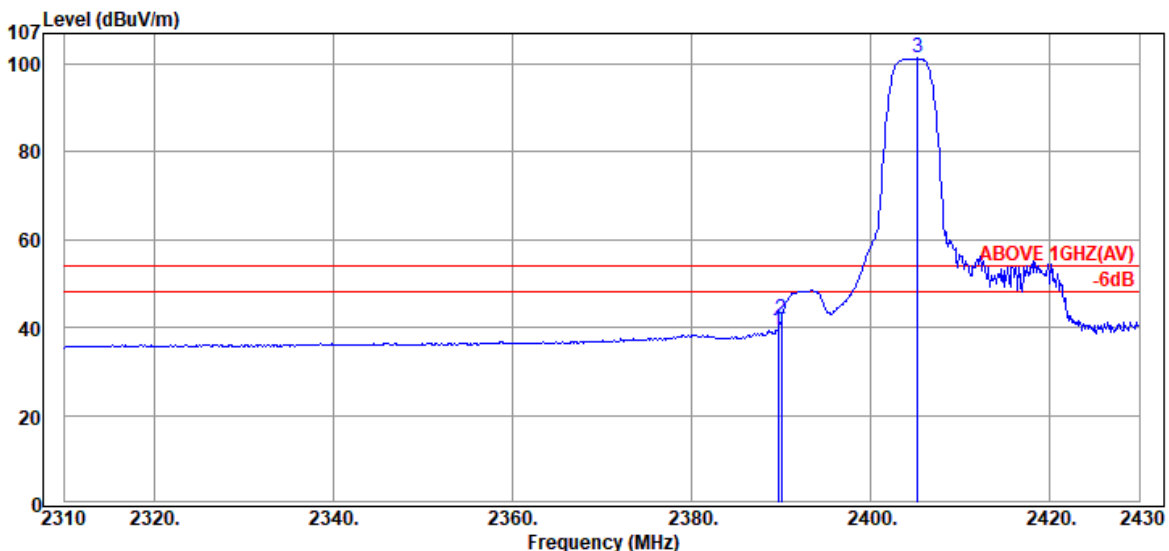

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	5.18	39.52	54.00	14.48	Average
2390.04	28.32	6.03	7.54	41.89	54.00	12.11	Average
@ 2405.28	28.41	6.04	66.86	101.31	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

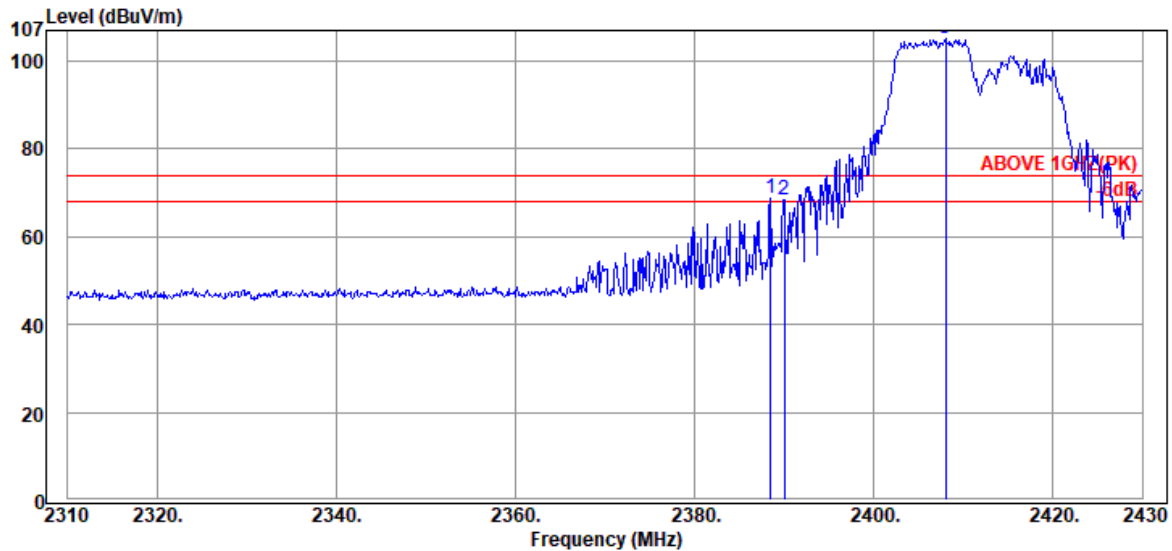

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.48	28.31	6.02	34.48	68.81	74.00	5.19	Peak
2390.04	28.32	6.03	33.99	68.34	74.00	5.66	Peak
@ 2408.04	28.42	6.05	70.52	104.99	---	---	Peak

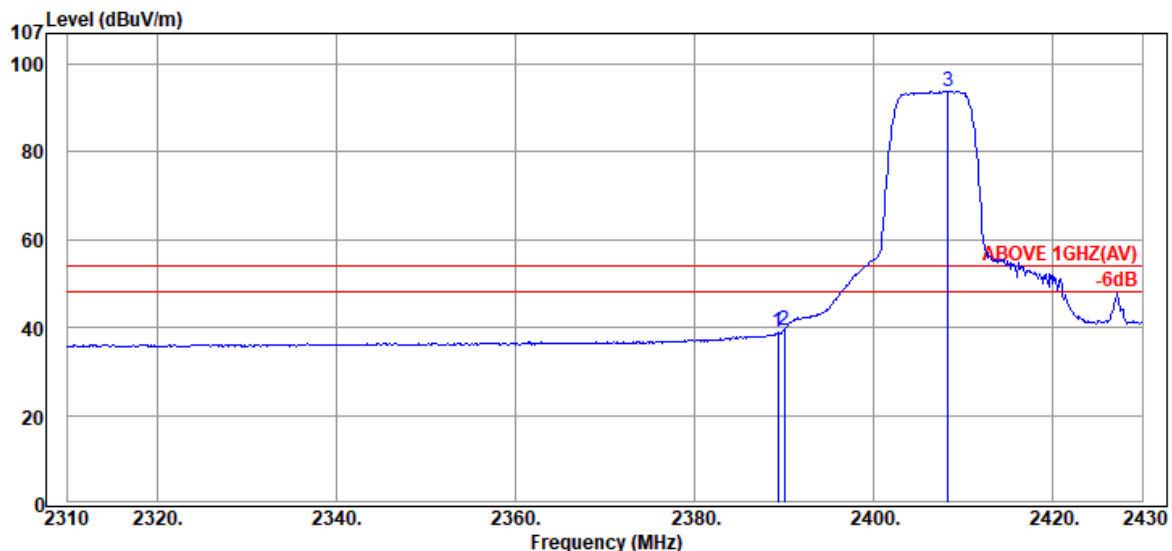

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	28.31	6.02	4.52	38.85	54.00	15.15	Average
2390.04	28.32	6.03	4.99	39.34	54.00	14.66	Average
@ 2408.28	28.42	6.05	59.34	93.81	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

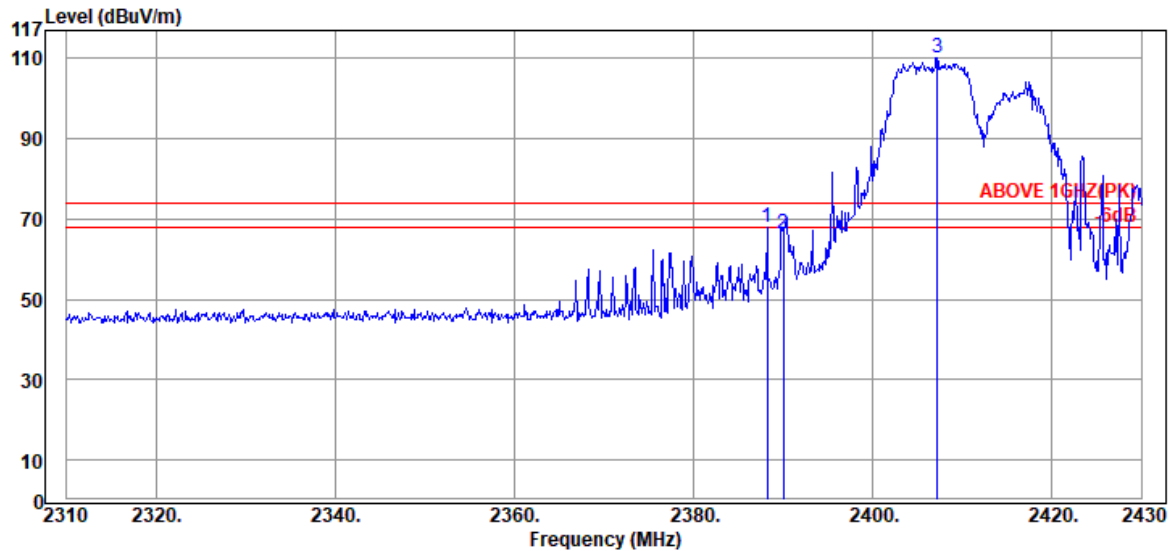

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.24	28.31	6.02	33.46	67.79	74.00	6.21	Peak
2390.04	28.32	6.03	32.10	66.45	74.00	7.55	Peak
@ 2407.20	28.41	6.04	75.57	110.02	---	---	Peak

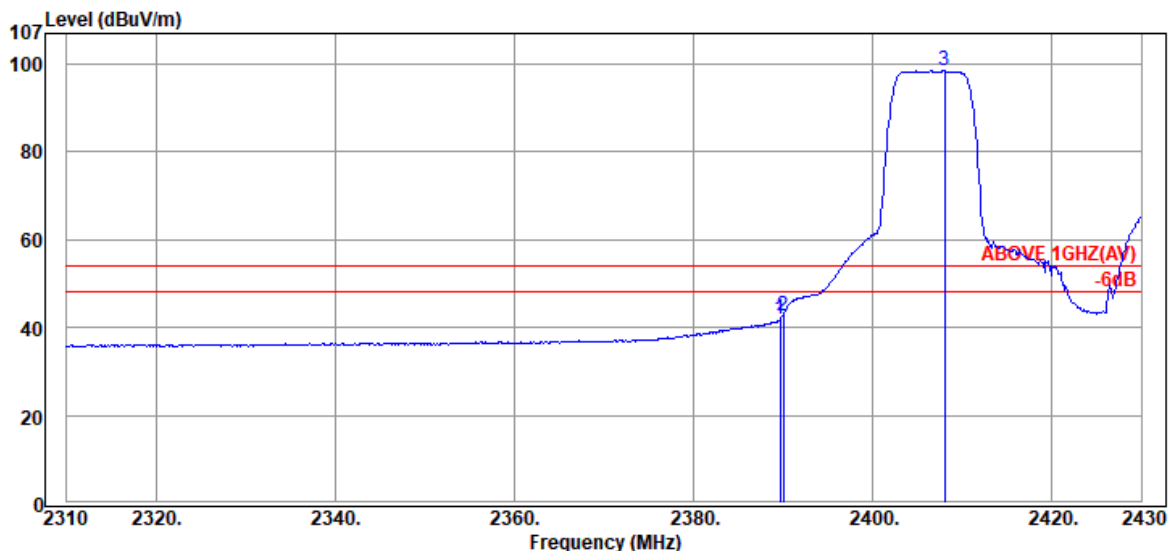

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	7.45	41.79	54.00	12.21	Average
2390.04	28.32	6.03	8.43	42.78	54.00	11.22	Average
@ 2408.04	28.42	6.05	64.06	98.53	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

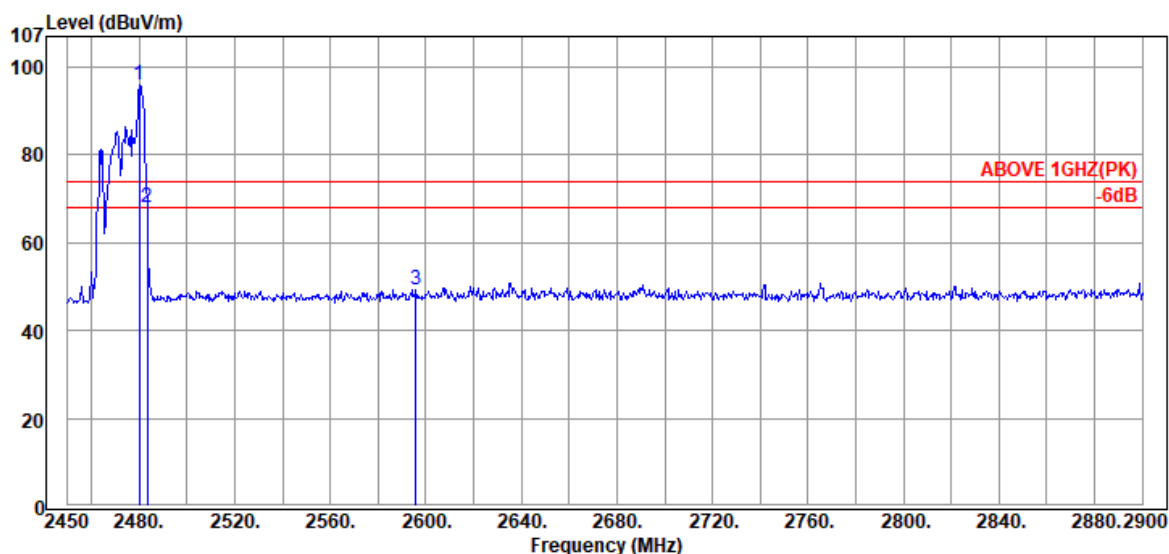

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.15	28.68	6.13	60.99	95.80	---	---	Peak
	2483.30	28.70	6.13	33.32	68.15	74.00	5.85	Peak
	2595.80	29.08	6.28	13.77	49.13	74.00	24.87	Peak

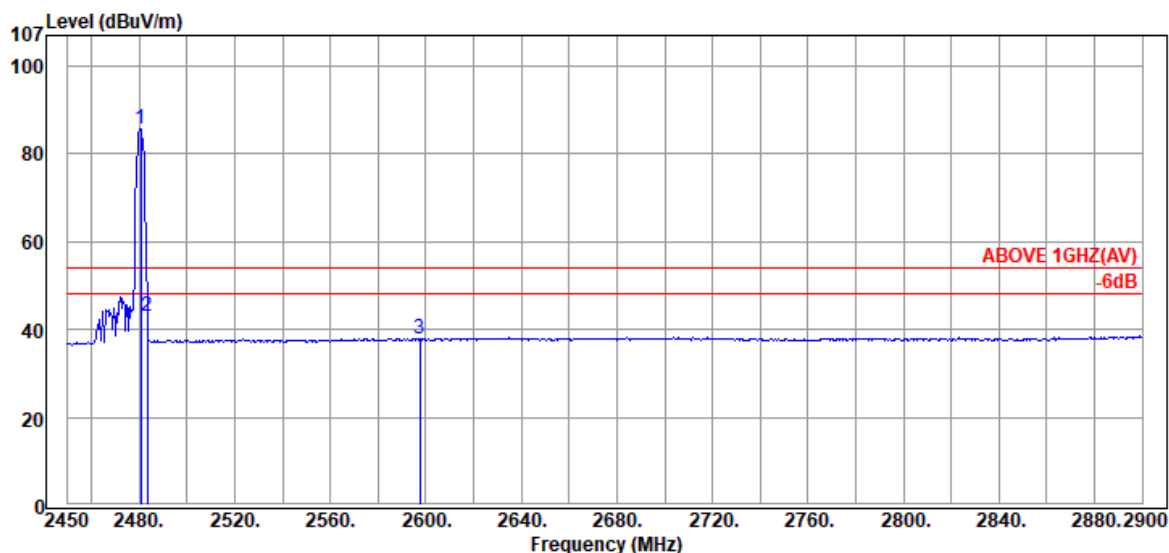

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.60	28.68	6.13	50.97	85.78	---	---	Average
	2483.30	28.70	6.13	8.11	42.94	54.00	11.06	Average
	2597.60	29.09	6.28	2.65	38.02	54.00	15.98	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

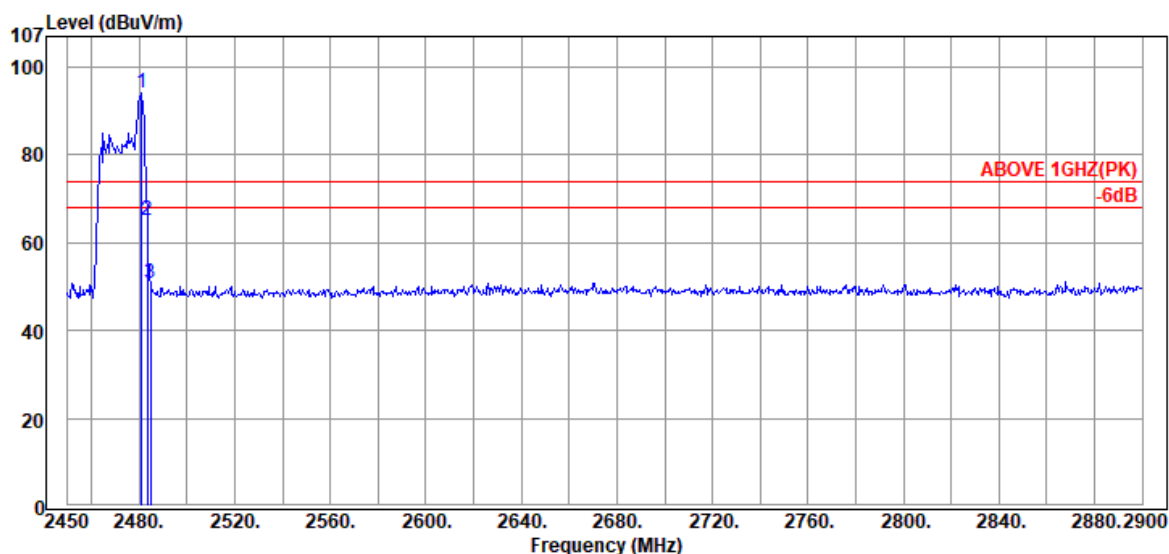

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.05	28.69	6.13	59.31	94.13	---	---	Peak
2483.30	28.70	6.13	30.39	65.22	74.00	8.78	Peak
2484.65	28.71	6.13	16.06	50.90	74.00	23.10	Peak

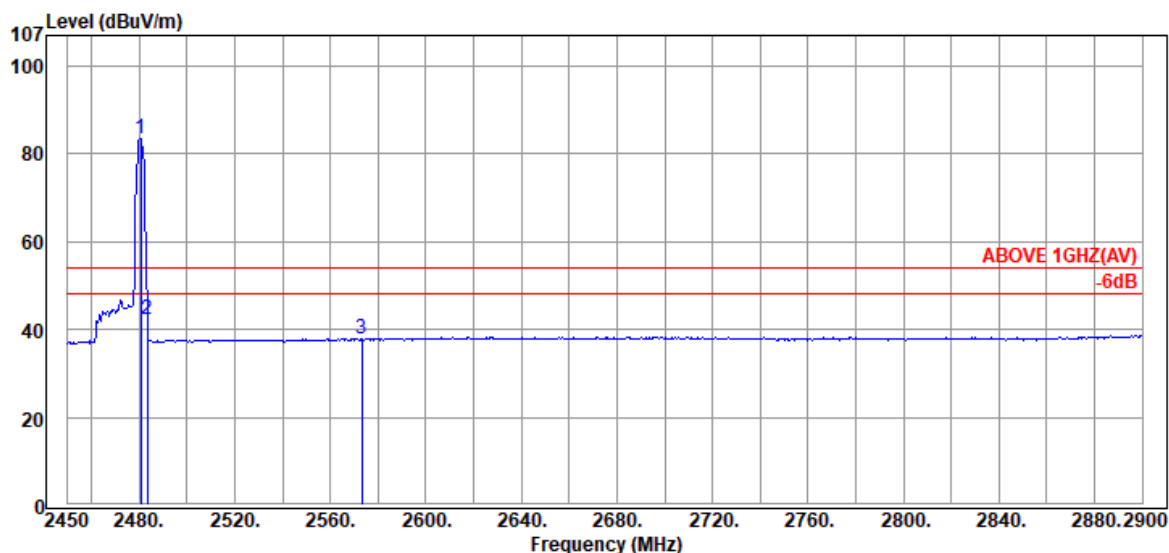

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.60	28.68	6.13	48.80	83.61	---	---	Average
2483.30	28.70	6.13	7.40	42.23	54.00	11.77	Average
2573.30	28.99	6.25	2.76	38.00	54.00	16.00	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

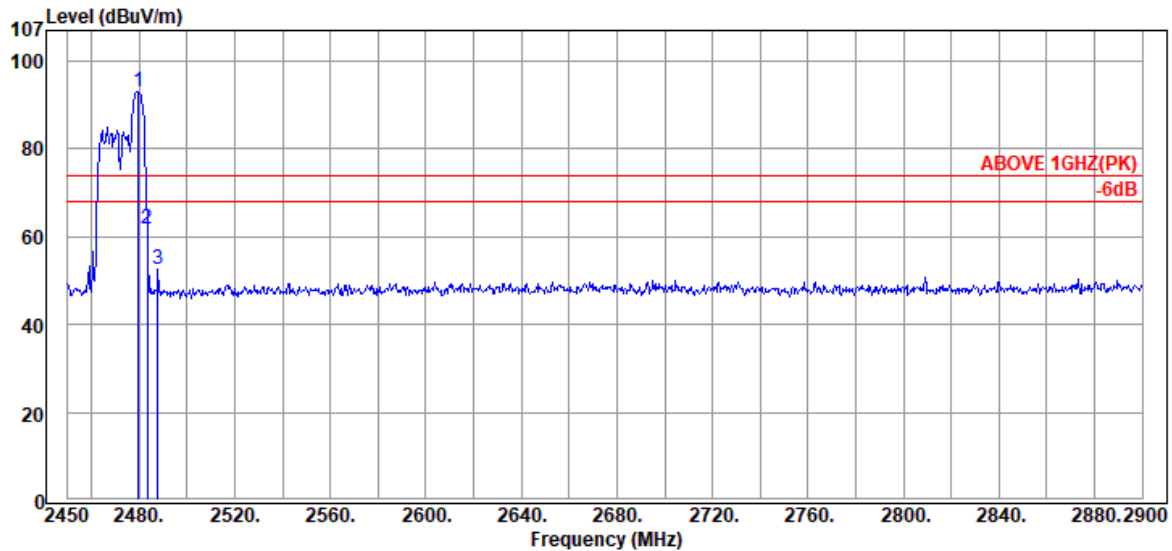

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.70	28.68	6.13	58.24	93.05	---	---	Peak
	2483.30	28.70	6.13	26.82	61.65	74.00	12.35	Peak
	2487.80	28.73	6.14	17.78	52.65	74.00	21.35	Peak

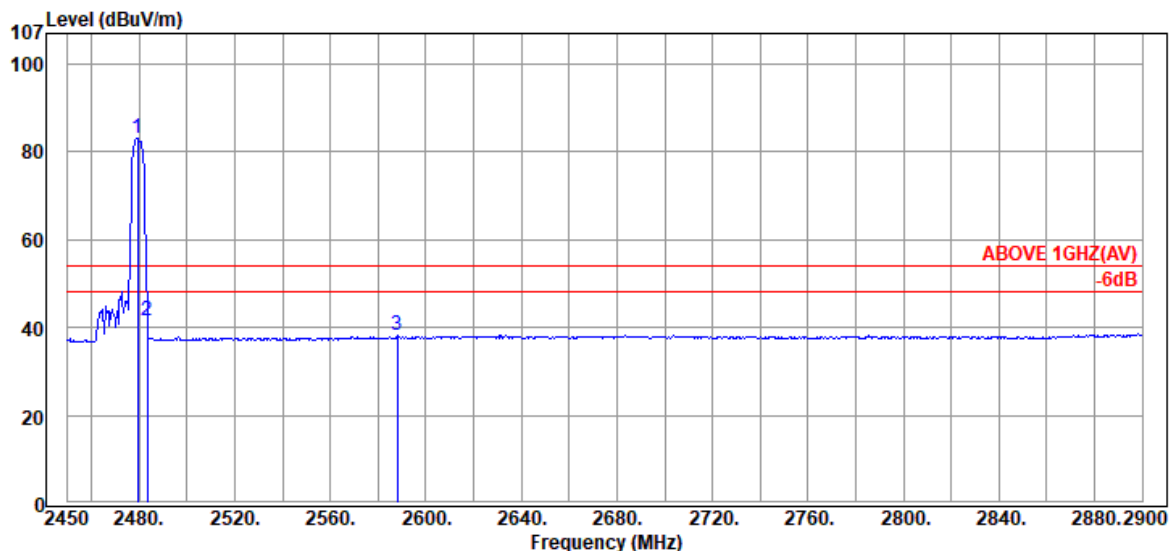

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.25	28.68	6.13	48.25	83.06	---	---	Average
	2483.30	28.70	6.13	6.64	41.47	54.00	12.53	Average
	2588.15	29.05	6.27	2.76	38.08	54.00	15.92	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

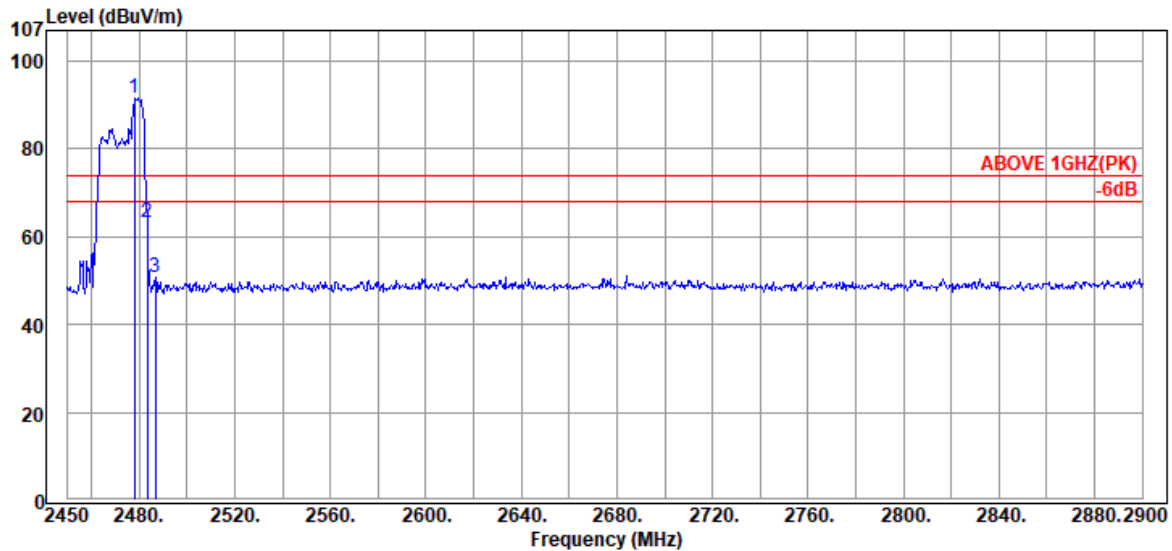

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.90	28.67	6.13	56.71	91.51	---	---	Peak
2483.30	28.70	6.13	28.57	63.40	74.00	10.60	Peak
2486.90	28.72	6.14	15.71	50.57	74.00	23.43	Peak

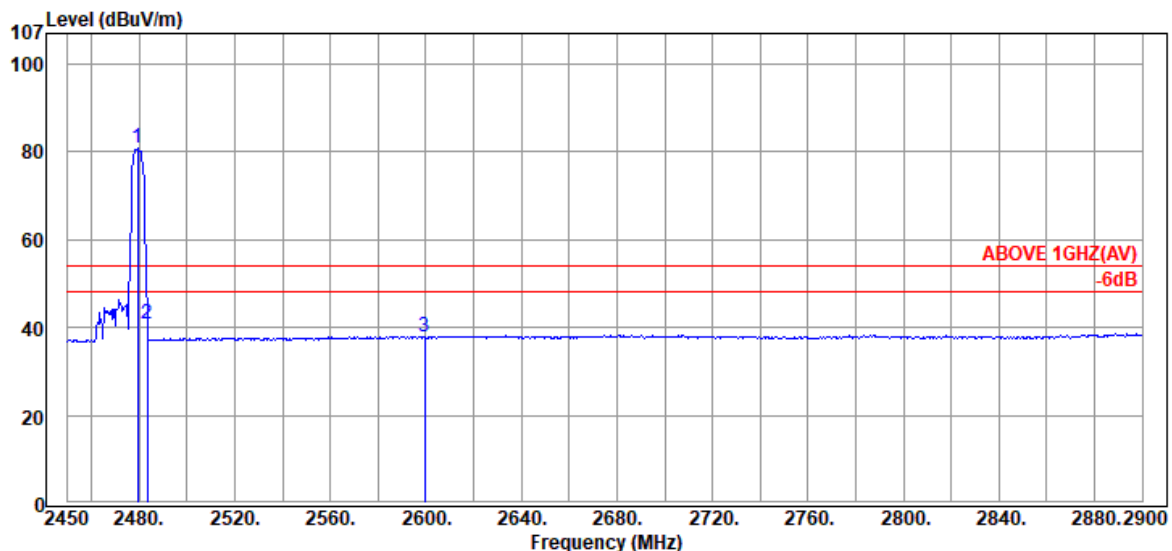

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.25	28.68	6.13	45.97	80.78	---	---	Average
2483.30	28.70	6.13	5.84	40.67	54.00	13.33	Average
2599.40	29.10	6.28	2.57	37.95	54.00	16.05	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

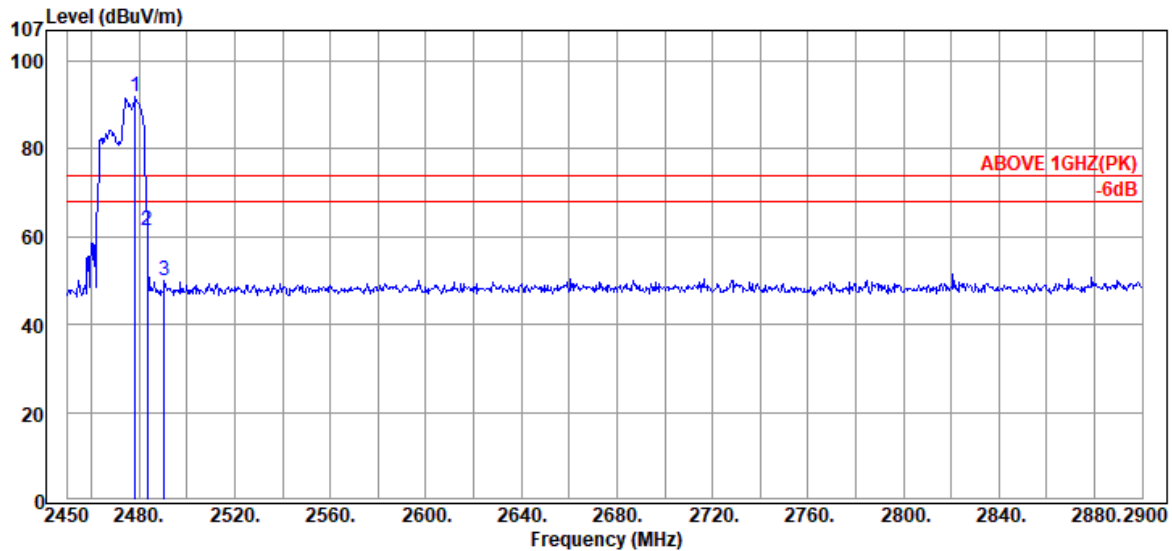

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.35	28.67	6.13	57.03	91.83	---	---	Peak
2483.30	28.70	6.13	26.62	61.45	74.00	12.55	Peak
2490.50	28.74	6.14	15.17	50.05	74.00	23.95	Peak

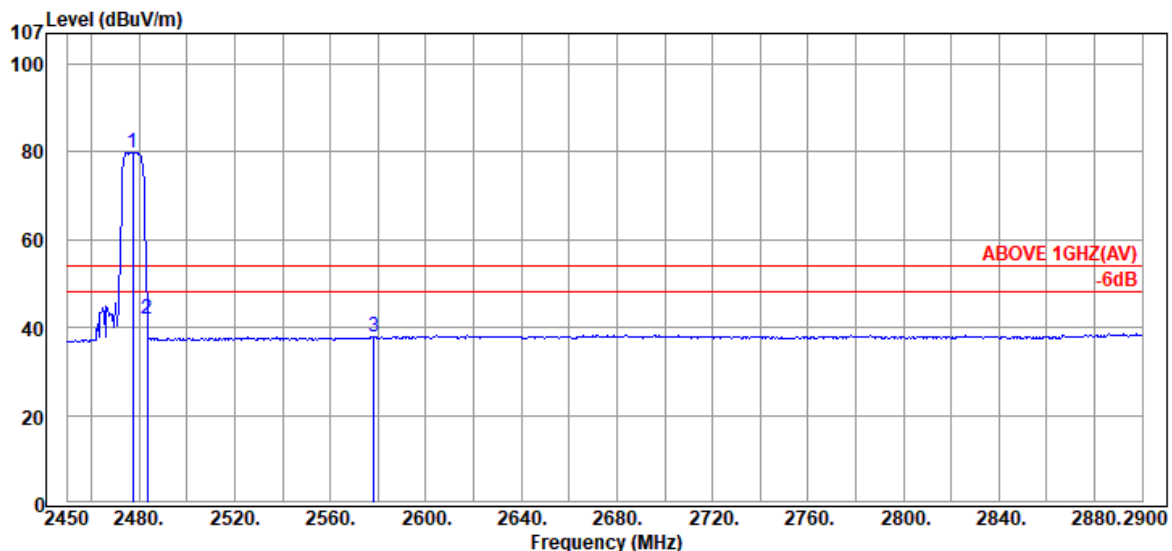

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.45	28.66	6.12	45.02	79.80	---	---	Average
2483.30	28.70	6.13	6.99	41.82	54.00	12.18	Average
2578.25	29.01	6.25	2.70	37.96	54.00	16.04	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

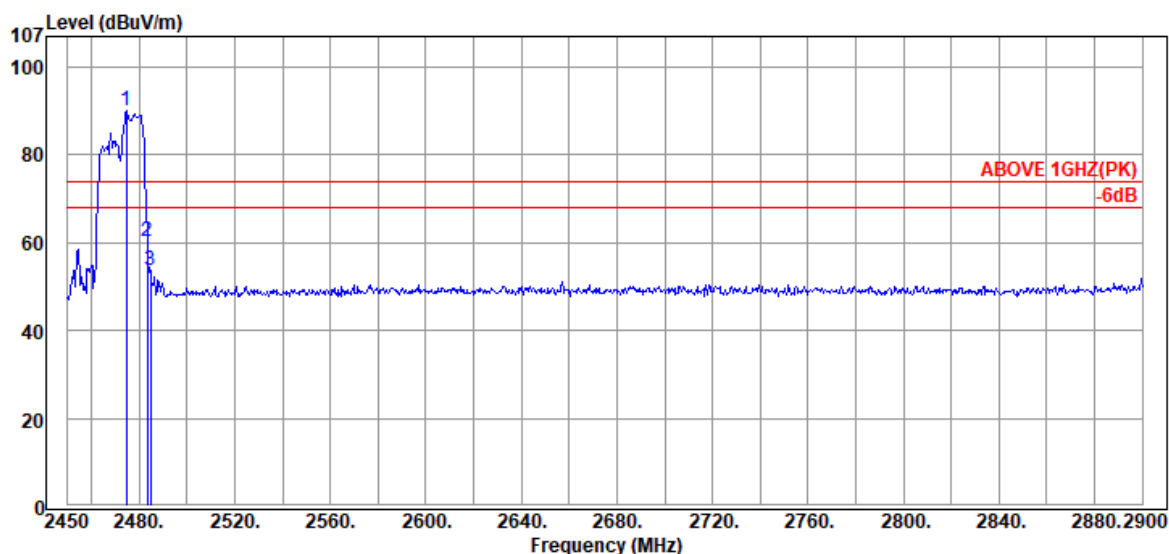

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.75	28.65	6.12	55.46	90.23	---	---	Peak
2483.30	28.70	6.13	25.36	60.19	74.00	13.81	Peak
2484.65	28.71	6.13	18.92	53.76	74.00	20.24	Peak

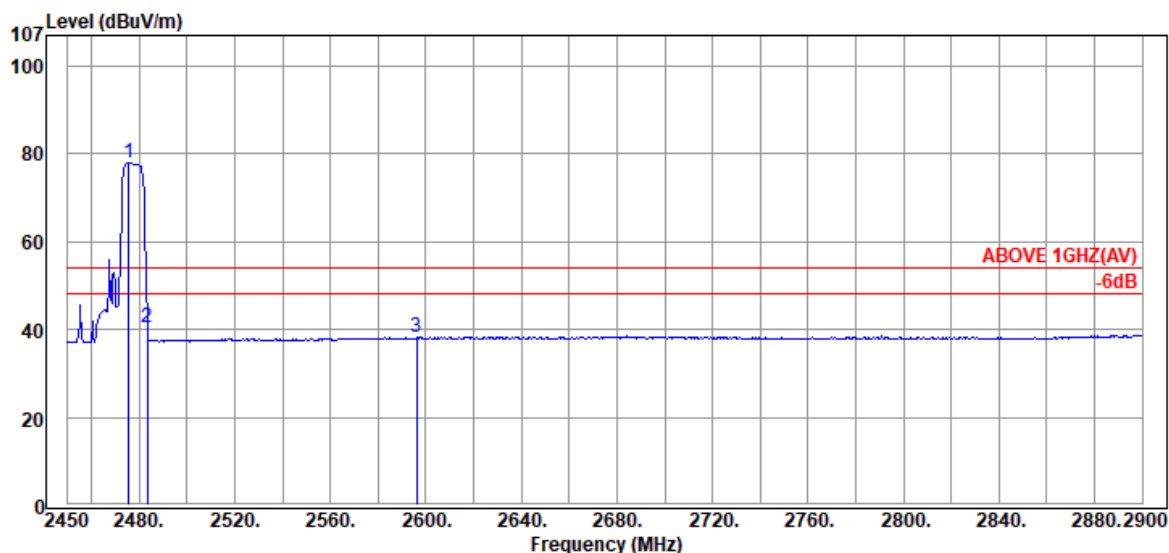

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.65	28.65	6.12	43.25	78.02	---	---	Average
2483.30	28.70	6.13	5.80	40.63	54.00	13.37	Average
2596.25	29.09	6.28	2.78	38.15	54.00	15.85	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

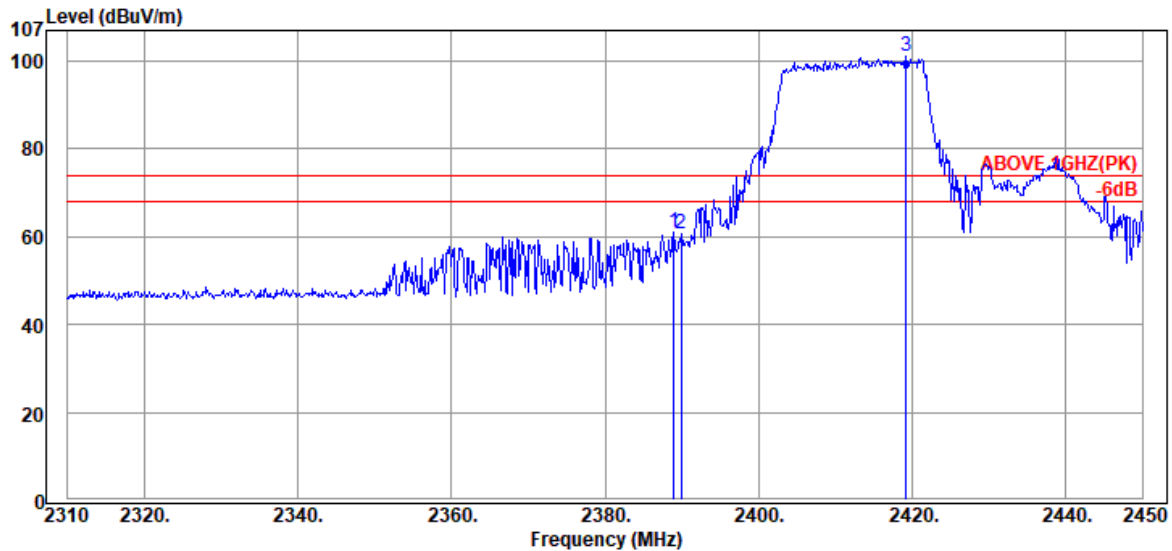

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.96	28.31	6.02	26.66	60.99	74.00	13.01	Peak
2389.94	28.32	6.02	26.29	60.63	74.00	13.37	Peak
@ 2419.20	28.44	6.06	66.67	101.17	---	---	Peak

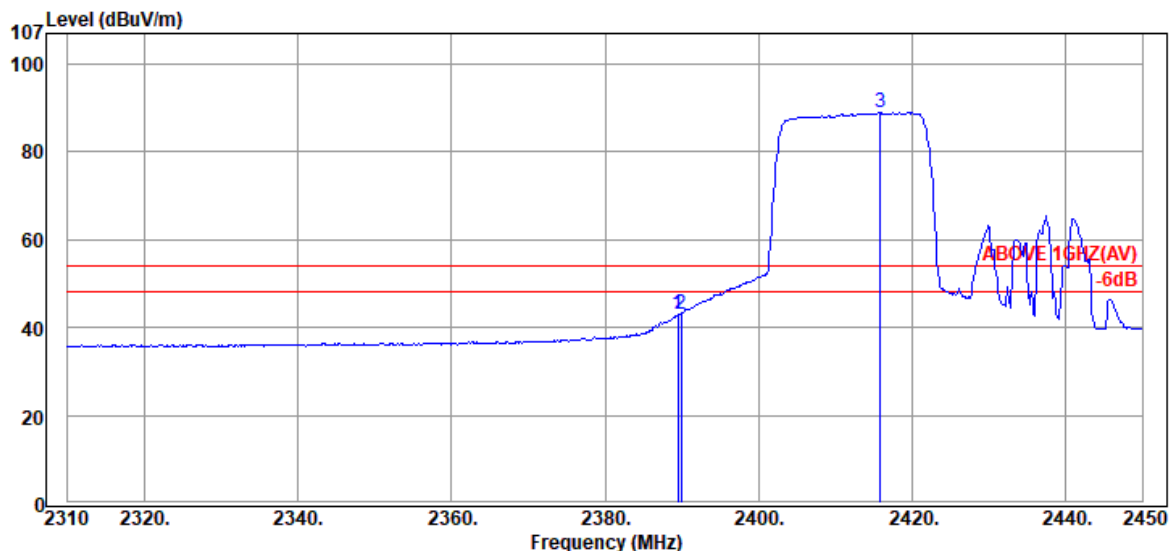

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	8.55	42.89	54.00	11.11	Average
2389.94	28.32	6.02	8.82	43.16	54.00	10.84	Average
@ 2415.84	28.43	6.05	54.59	89.07	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

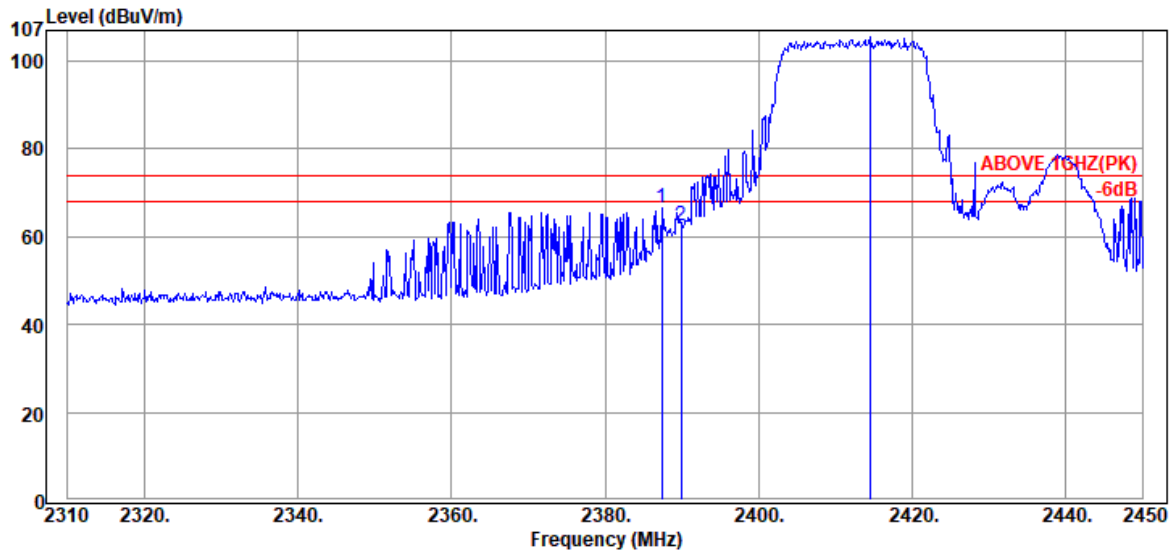

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.42	28.30	6.02	32.25	66.57	74.00	7.43	Peak
2389.94	28.32	6.02	27.99	62.33	74.00	11.67	Peak
@ 2414.58	28.43	6.05	71.10	105.58	---	---	Peak

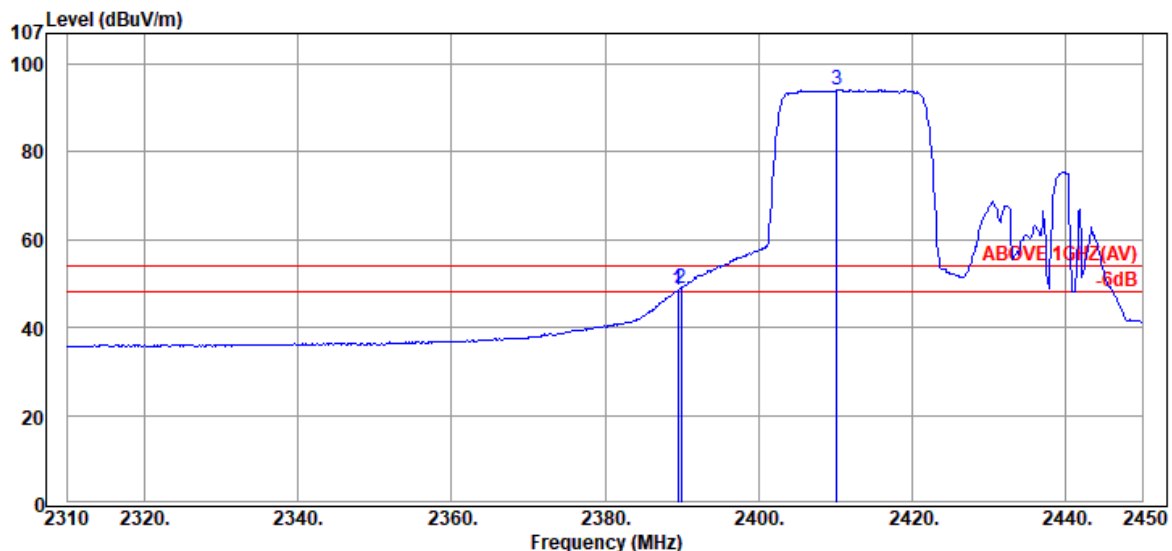

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	14.04	48.38	54.00	5.62	Average
2389.94	28.32	6.02	14.68	49.02	54.00	4.98	Average
@ 2410.24	28.42	6.05	59.70	94.17	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

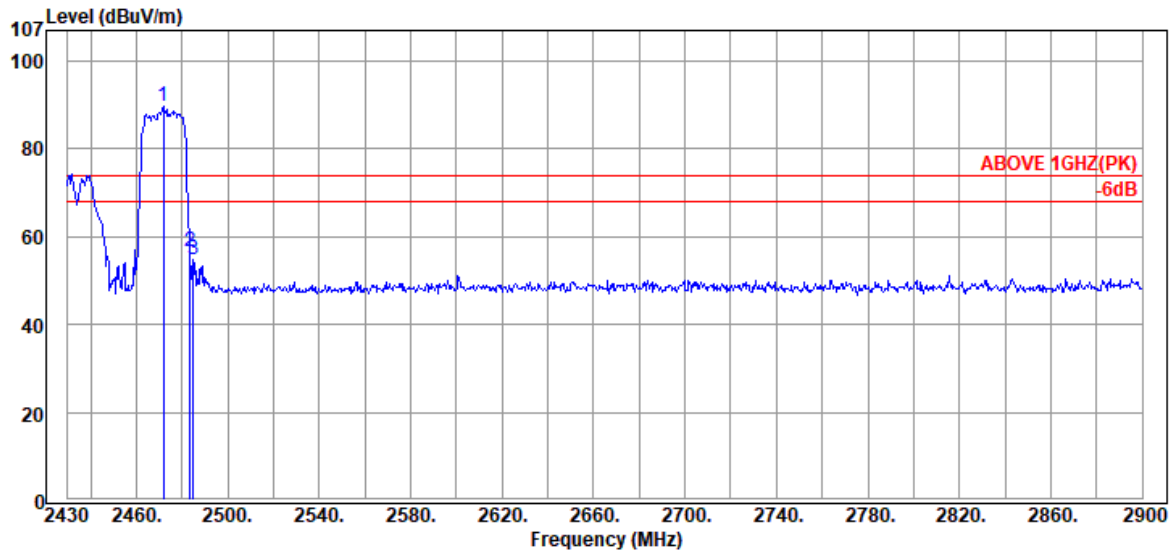

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.83	28.63	6.12	55.14	89.89	---	---	Peak
2483.58	28.70	6.13	21.63	56.46	74.00	17.54	Peak
2484.99	28.71	6.13	19.87	54.71	74.00	19.29	Peak

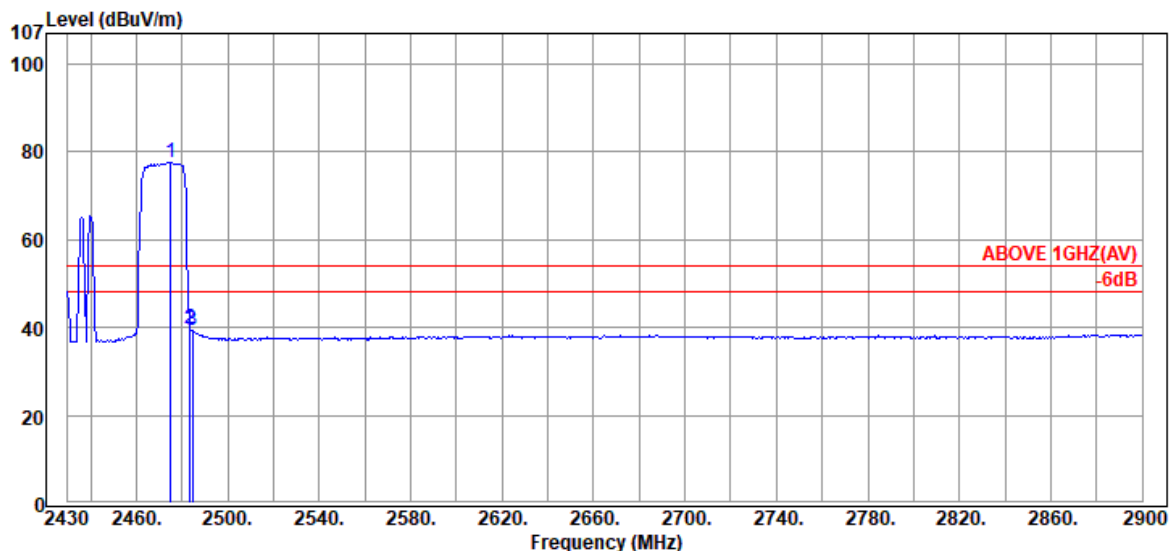

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.12	28.65	6.12	42.79	77.56	---	---	Average
2483.58	28.70	6.13	4.97	39.80	54.00	14.20	Average
2484.52	28.71	6.13	4.52	39.36	54.00	14.64	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M1912228


Report Number: EM-F190520

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

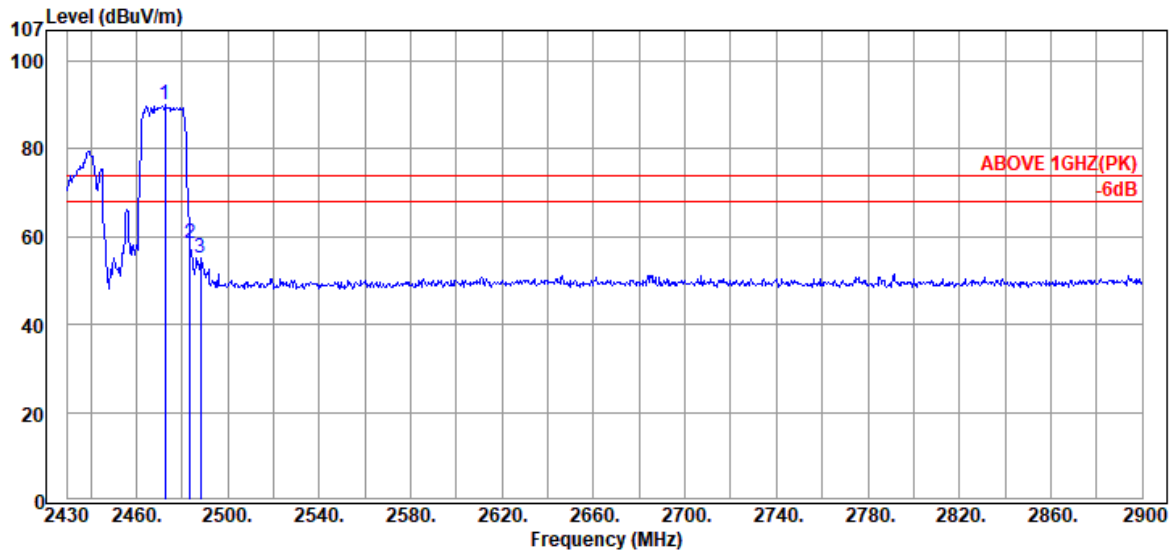

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.77	28.64	6.12	55.27	90.03	---	---	Peak
2483.58	28.70	6.13	23.81	58.64	74.00	15.36	Peak
2488.28	28.73	6.14	20.40	55.27	74.00	18.73	Peak

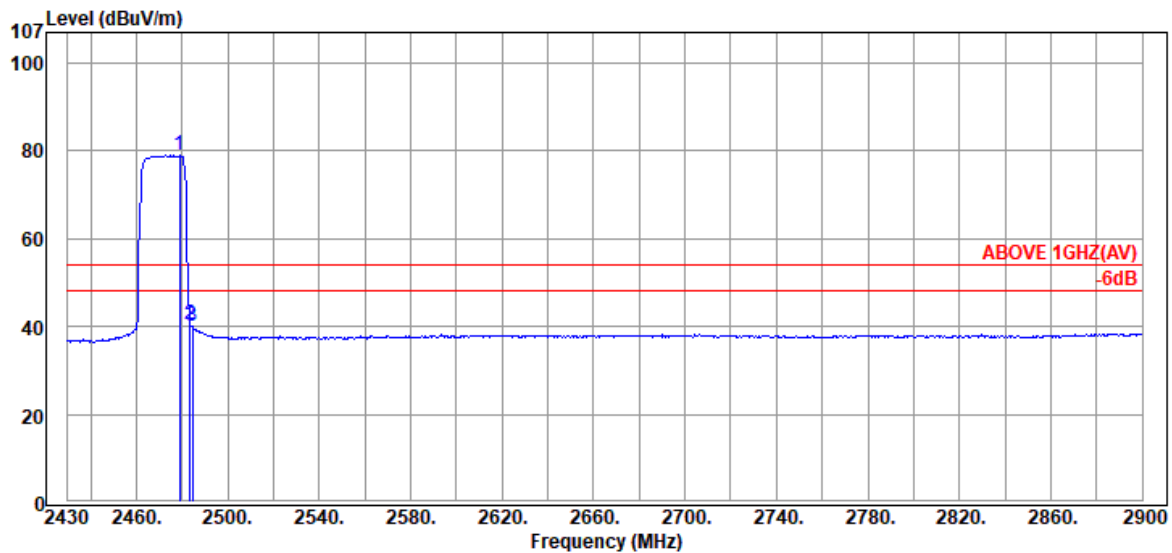

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.88	28.67	6.13	44.21	79.01	---	---	Average
2483.58	28.70	6.13	5.80	40.63	54.00	13.37	Average
2484.52	28.71	6.13	5.14	39.98	54.00	14.02	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

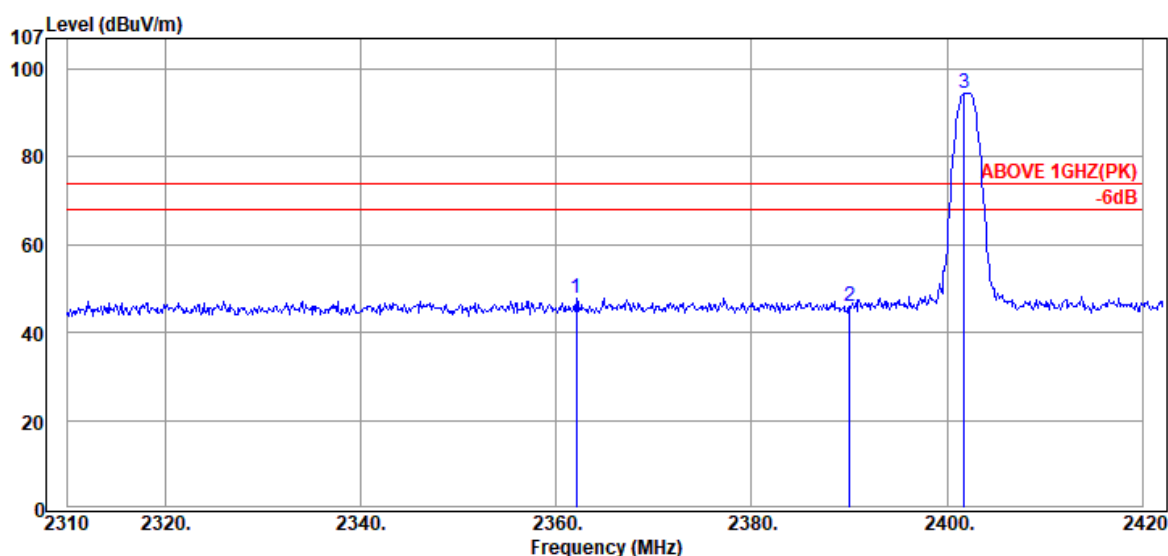

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2362.08	28.10	5.99	13.60	47.69	74.00	26.31	Peak
2390.04	28.32	6.03	11.68	46.03	74.00	27.97	Peak
@ 2401.80	28.40	6.04	60.18	94.62	---	---	Peak

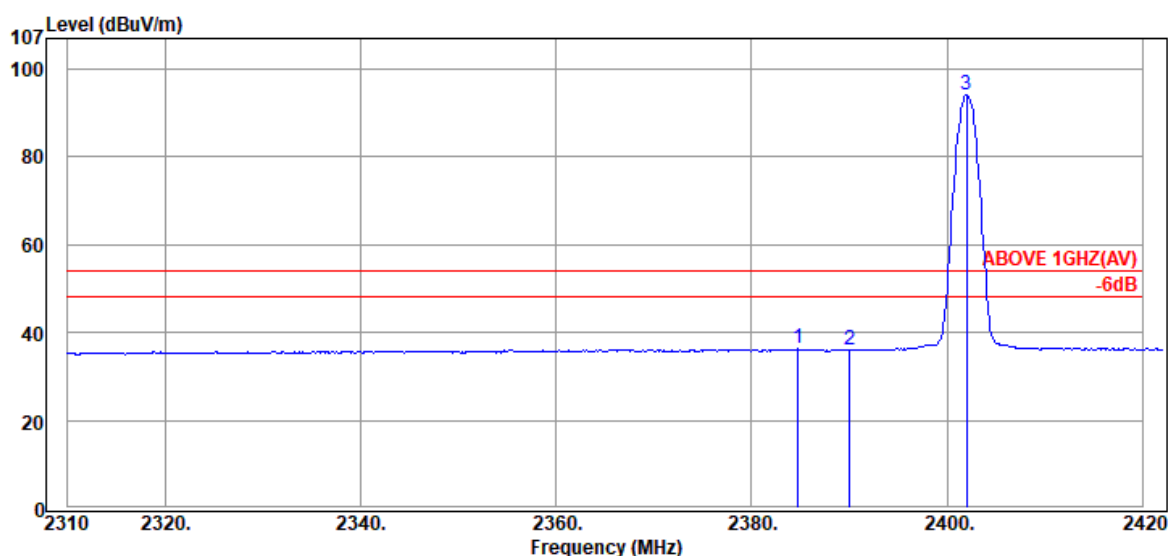

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.76	28.28	6.02	1.94	36.24	54.00	17.76	Average
2390.04	28.32	6.03	1.69	36.04	54.00	17.96	Average
@ 2402.04	28.40	6.04	59.62	94.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

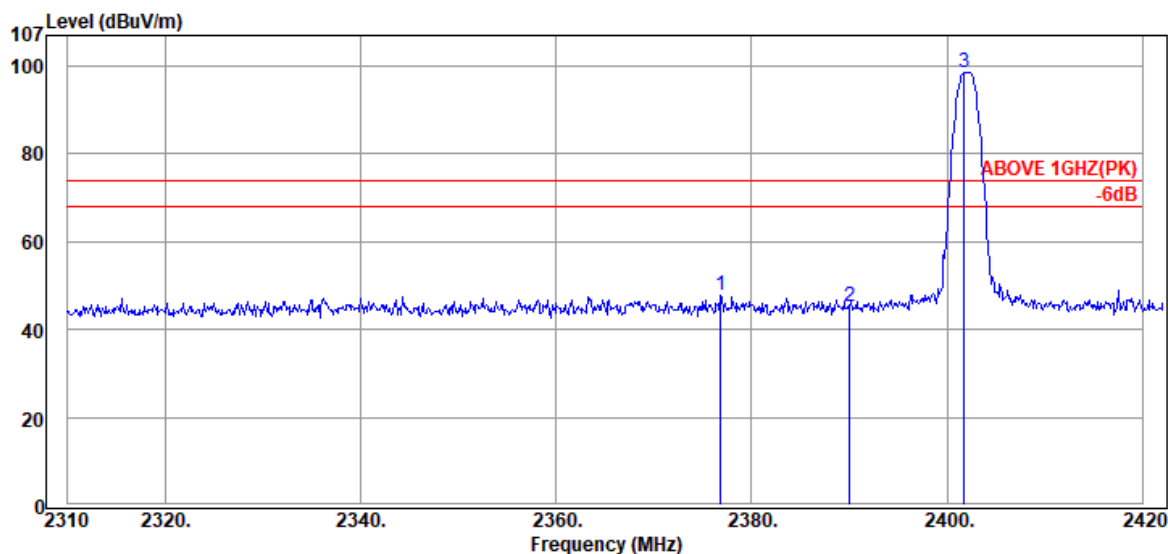

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.84	28.21	6.01	13.55	47.77	74.00	26.23	Peak
2390.04	28.32	6.03	11.03	45.38	74.00	28.62	Peak
@ 2401.80	28.40	6.04	64.13	98.57	---	---	Peak

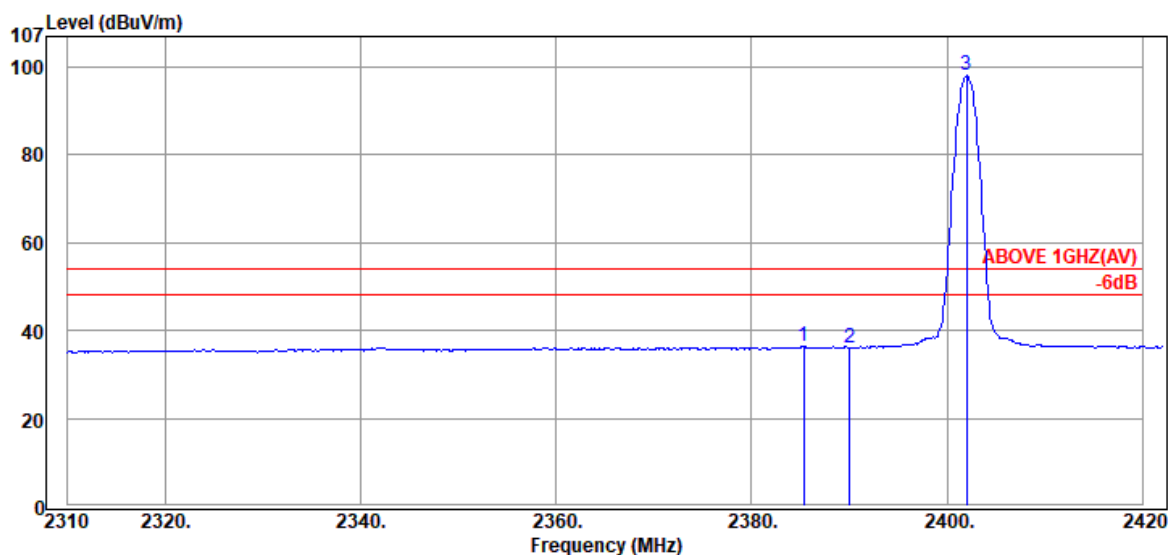

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.36	28.28	6.02	2.19	36.49	54.00	17.51	Average
2390.04	28.32	6.03	1.73	36.08	54.00	17.92	Average
@ 2402.04	28.40	6.04	63.56	98.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

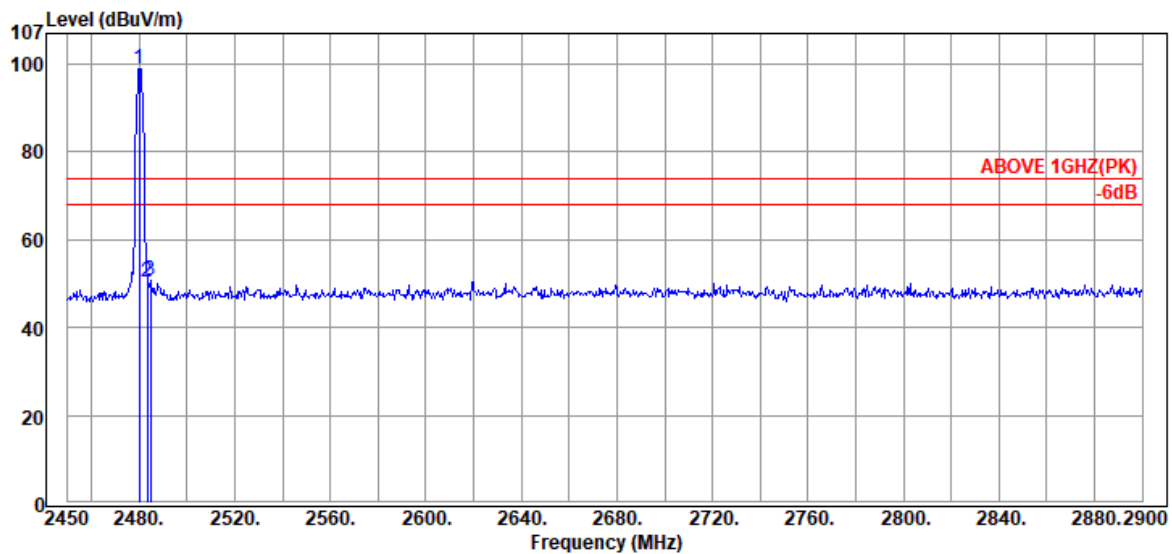

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	64.25	99.06	---	---	Peak
2483.30	28.70	6.13	15.42	50.25	74.00	23.75	Peak
2484.65	28.71	6.13	16.04	50.88	74.00	23.12	Peak

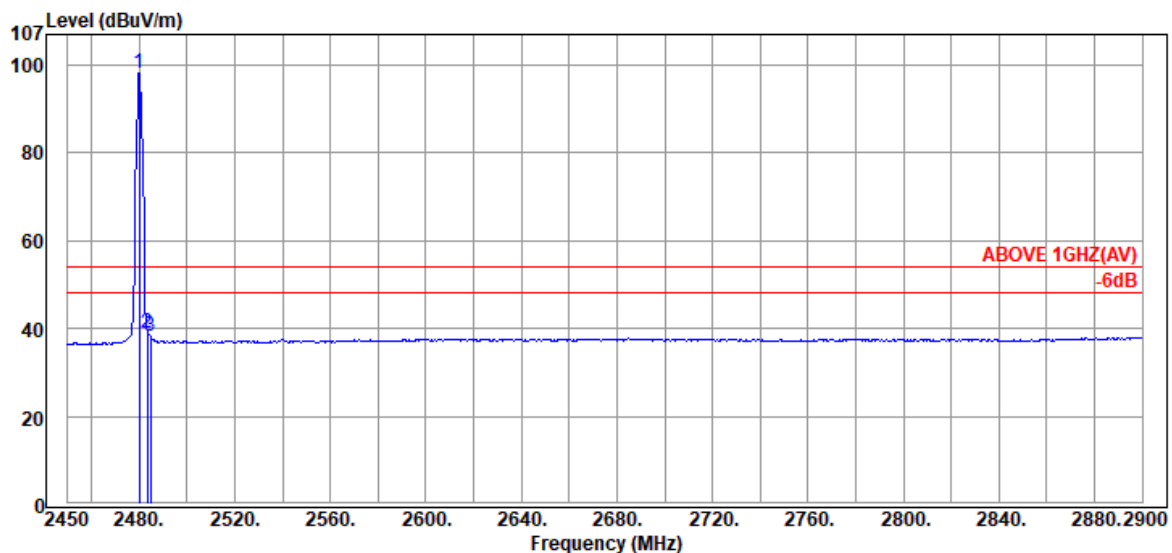


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	63.52	98.33	---	---	Average
2483.30	28.70	6.13	4.25	39.08	54.00	14.92	Average
2484.65	28.71	6.13	3.24	38.08	54.00	15.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

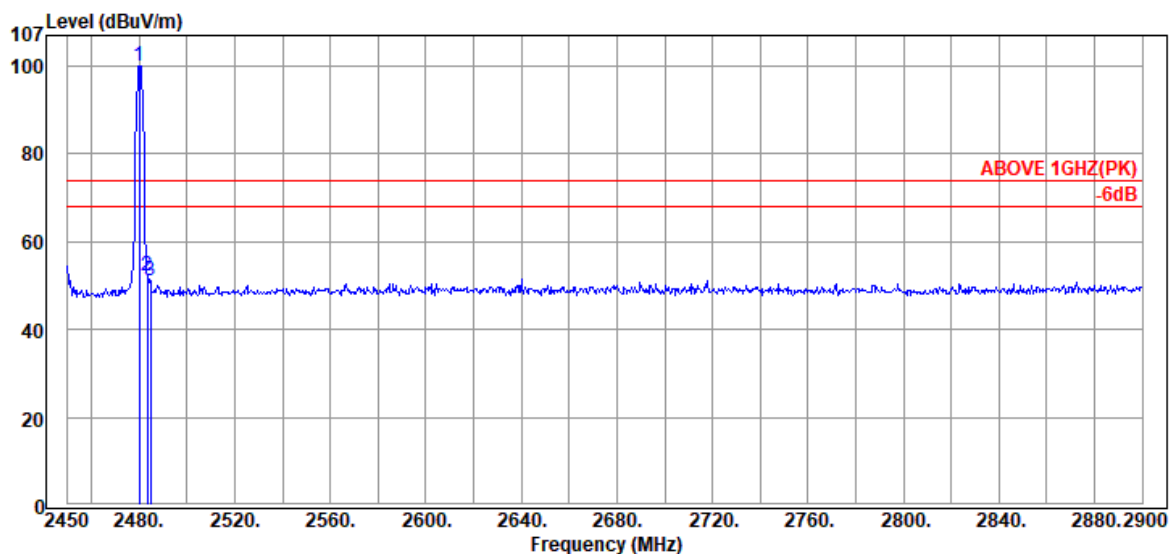

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	65.15	99.96	---	---	Peak
2483.30	28.70	6.13	17.42	52.25	74.00	21.75	Peak
2484.65	28.71	6.13	16.14	50.98	74.00	23.02	Peak

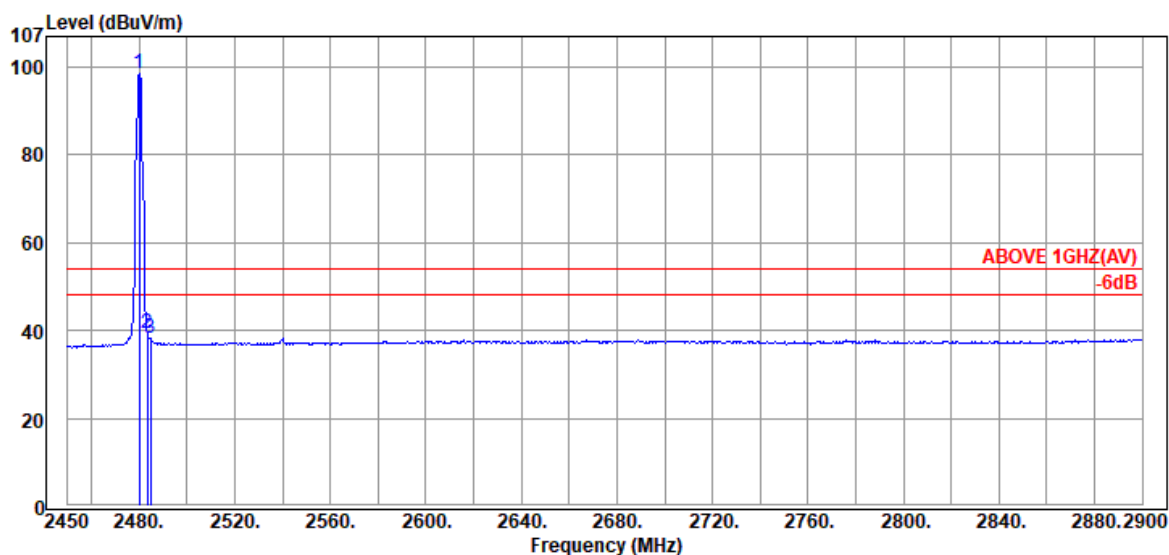

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	63.57	98.38	---	---	Average
2483.30	28.70	6.13	4.36	39.19	54.00	14.81	Average
2484.65	28.71	6.13	3.44	38.28	54.00	15.72	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-0.21	41.85	54.00	12.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	1.53	43.59	54.00	10.41	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-1.55	40.51	54.00	13.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-0.12	41.94	54.00	12.06	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-1.97	40.09	54.00	13.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-1.68	40.38	54.00	13.62	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4894.00	33.58	8.53	-1.70	40.41	54.00	13.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4894.00	33.58	8.53	-1.59	40.52	54.00	13.48	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.92	39.14	54.00	14.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-1.02	41.04	54.00	12.96	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.33	39.73	54.00	14.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.11	39.95	54.00	14.05	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	33.31	8.44	-2.29	39.46	54.00	14.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	33.31	8.44	-2.07	39.68	54.00	14.32	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	33.52	8.52	-2.92	39.12	54.00	14.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	33.52	8.52	-2.72	39.32	54.00	14.68	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	33.72	8.60	-3.25	39.07	54.00	14.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	33.72	8.60	-3.17	39.15	54.00	14.85	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9table 4 general radiated emissions limits is not required.

A.3 6dB/OCCUPIED BANDWIDTH

Test Date	2019/09/19 ~ 25	Temp./Hum.	24~25°C/50~54%
Test Voltage	AC 120V, 60Hz (via AC Adapter)	Tested By	Martin Chen
Cable Loss	0.5dB	Test Model	14Z995

A.3.1 Emission Bandwidth Result

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11b	2412	10.14	13.386	>500kHz
	2442	10.14	13.444	
	2462	10.14	13.398	
	2472	10.14	13.854	
802.11g	2412	16.38	16.607	
	2442	16.40	16.800	
	2462	16.38	16.678	
	2472	16.38	16.370	
802.11n-HT20	2412	17.62	17.781	
	2442	17.62	17.812	
	2462	17.62	17.794	
	2472	17.62	17.594	
802.11n-HT40	2422	36.40	36.208	
	2442	36.40	36.231	
	2452	36.36	36.187	
	2462	36.36	36.106	
802.11ax-HE20	2412	18.98	18.978	
	2442	18.85	18.988	
	2462	18.85	19.011	
	2472	18.63	18.708	
802.11ax-HE40	2422	38.01	37.753	
	2442	38.02	37.729	
	2452	38.03	37.740	
	2462	37.77	37.474	

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,


New Taipei City 244, Taiwan


Tel: +886 2 26099301**Fax: +886 2 26099303**


Mode	RU Configuration	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11ax-HE20	26/0	2412	2.063	18.272	>500kHz
	52/37		14.48	18.129	
	106/53		17.19	18.198	
	26/8	2472	2.032	18.036	
	52/40		16.96	17.940	
	106/54		17.04	17.965	
802.11ax-HE40	242/61	2422	18.88	18.740	
	242/62	2462	18.58	18.513	

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE	2402	0.6760	1.0648	>500kHz
	2440	0.6844	1.0613	
	2480	0.6956	1.0633	

A.3.2 Measurement Plots

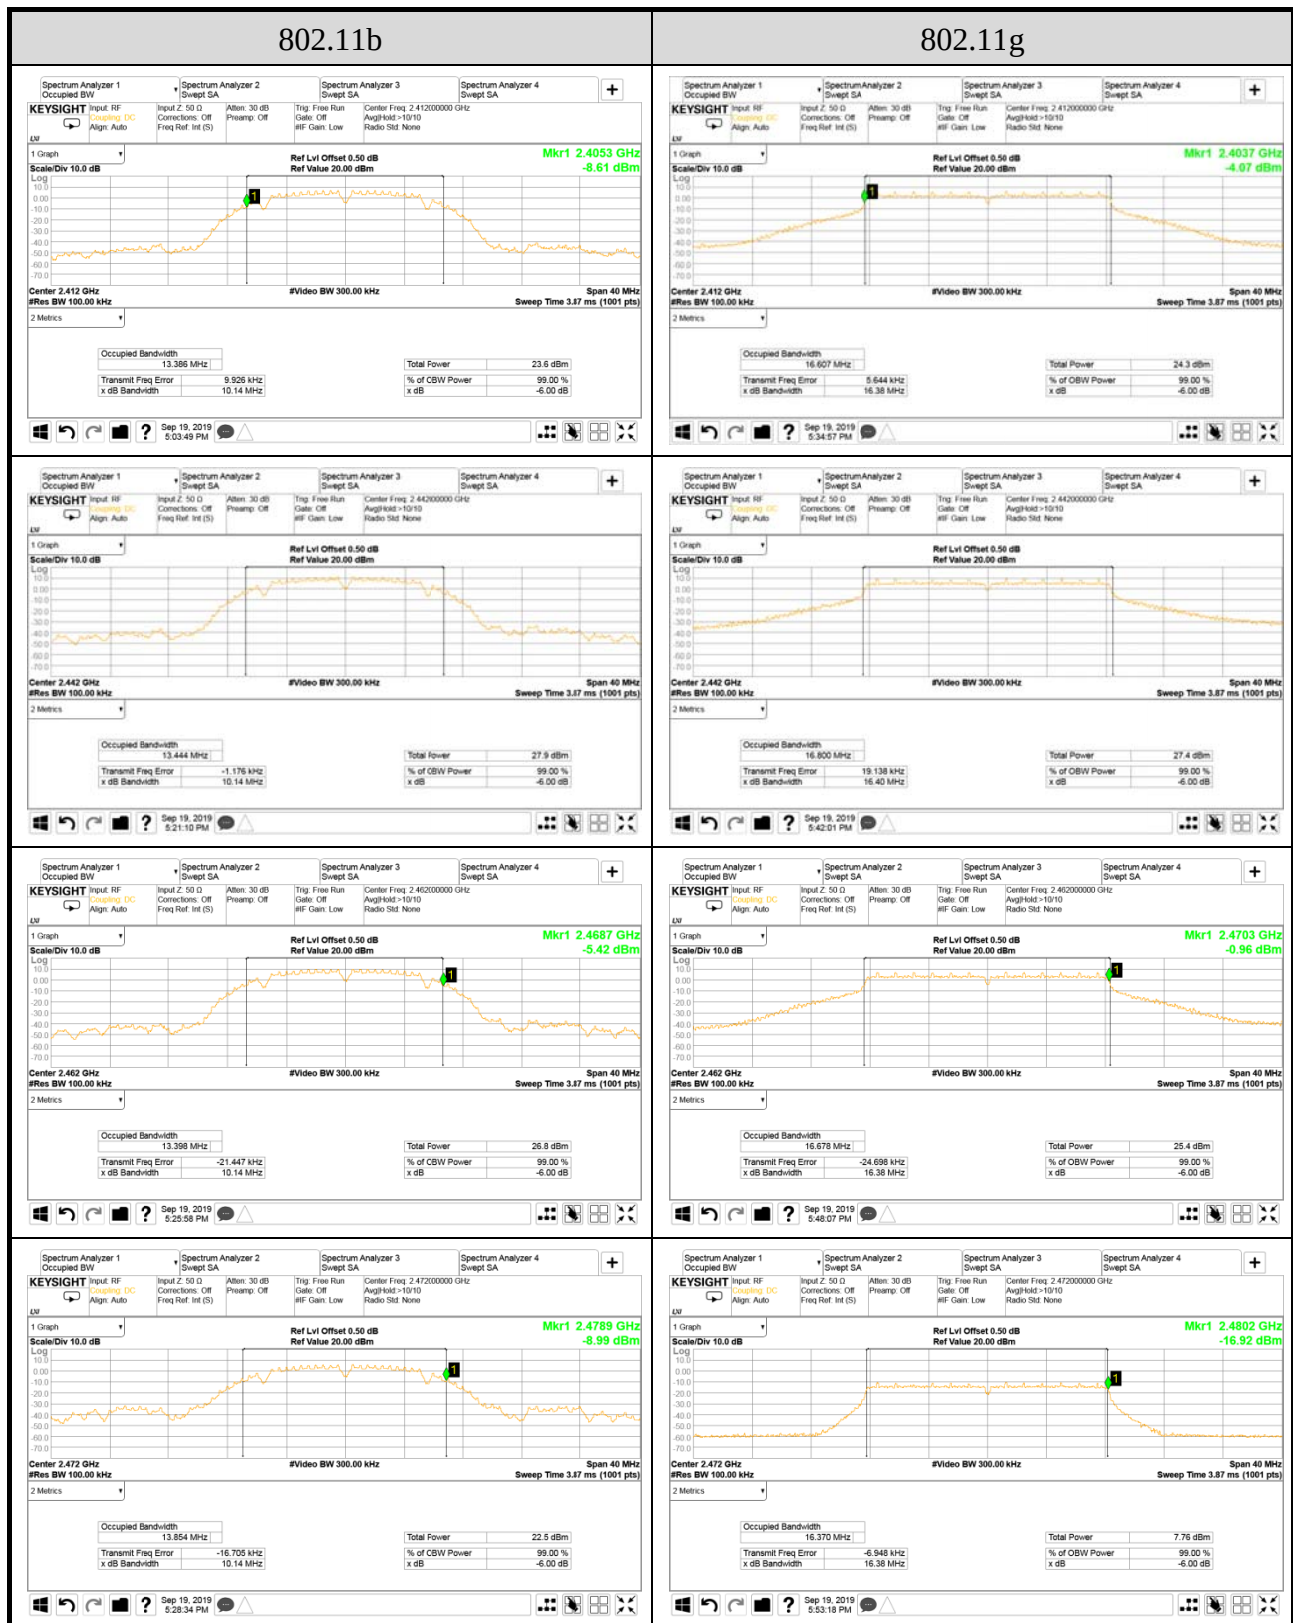


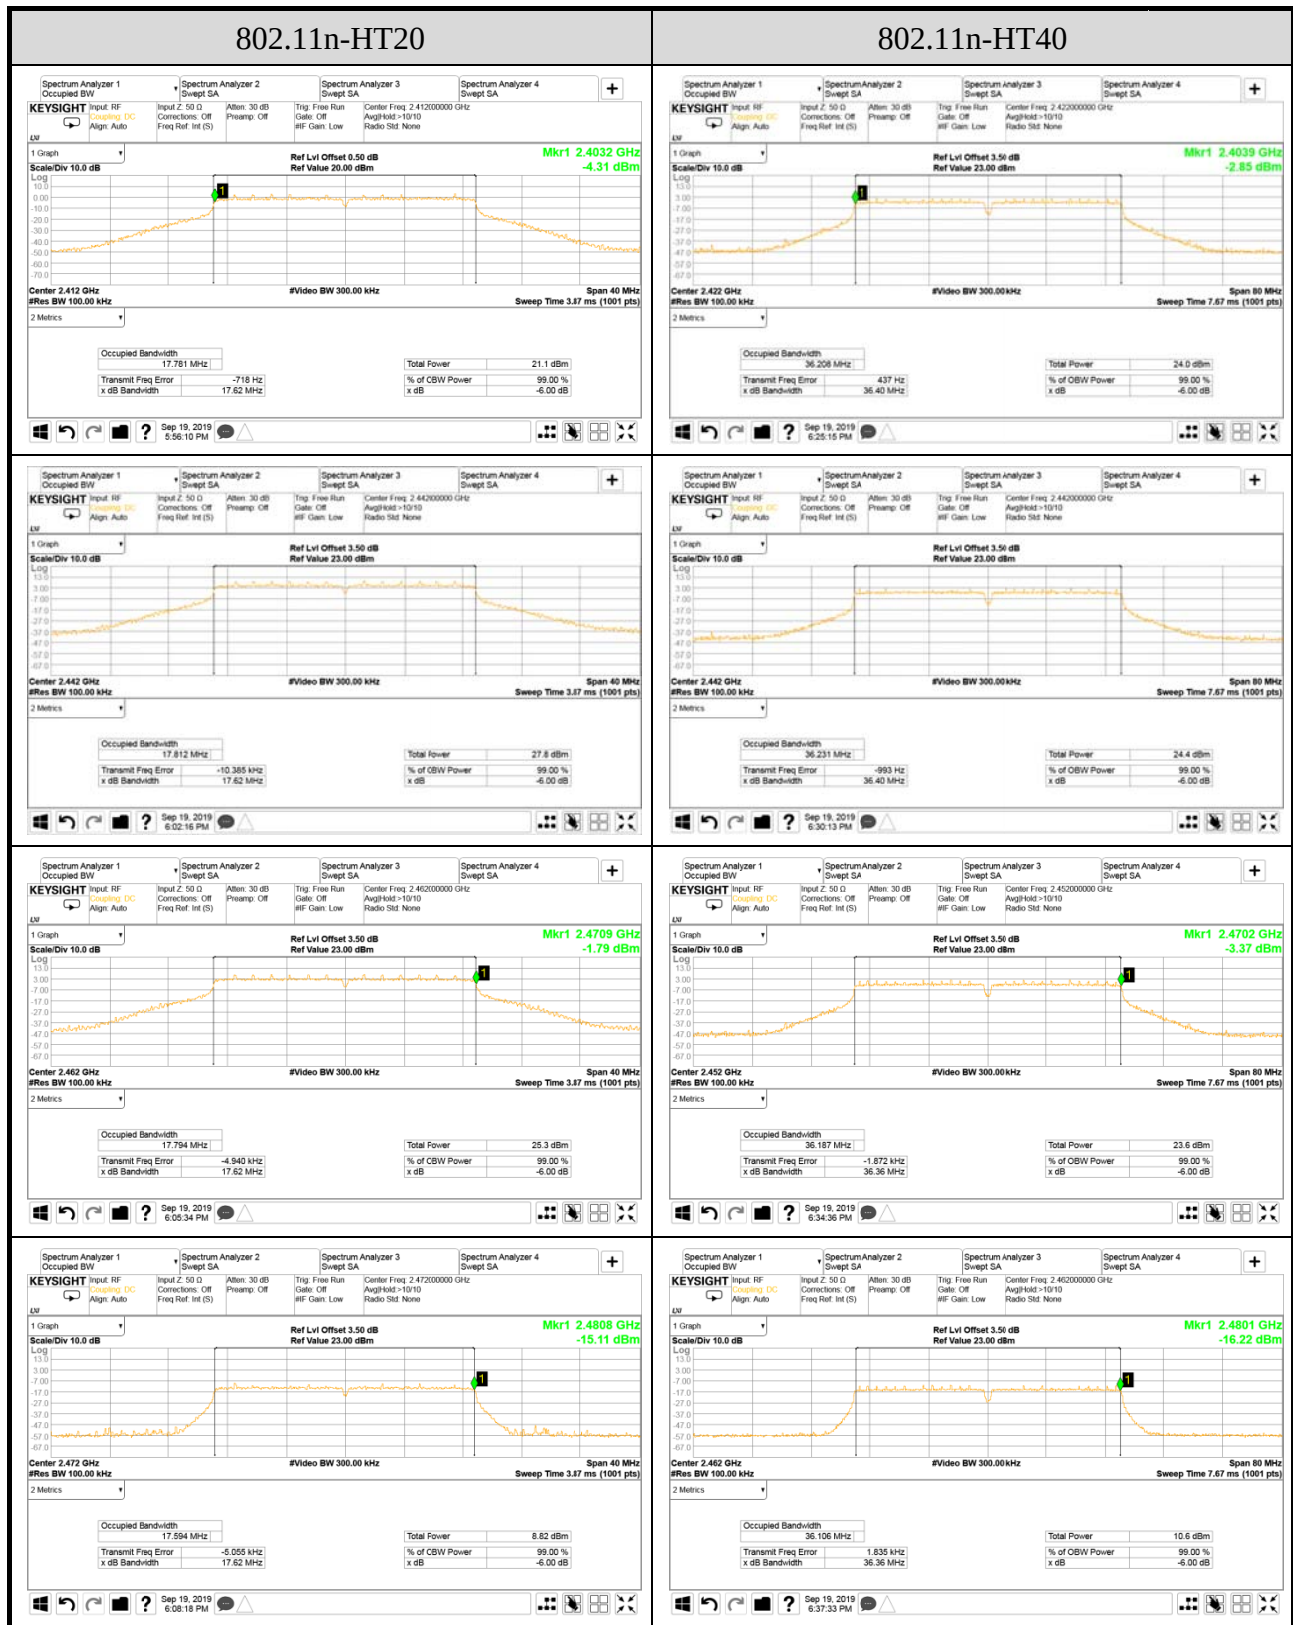

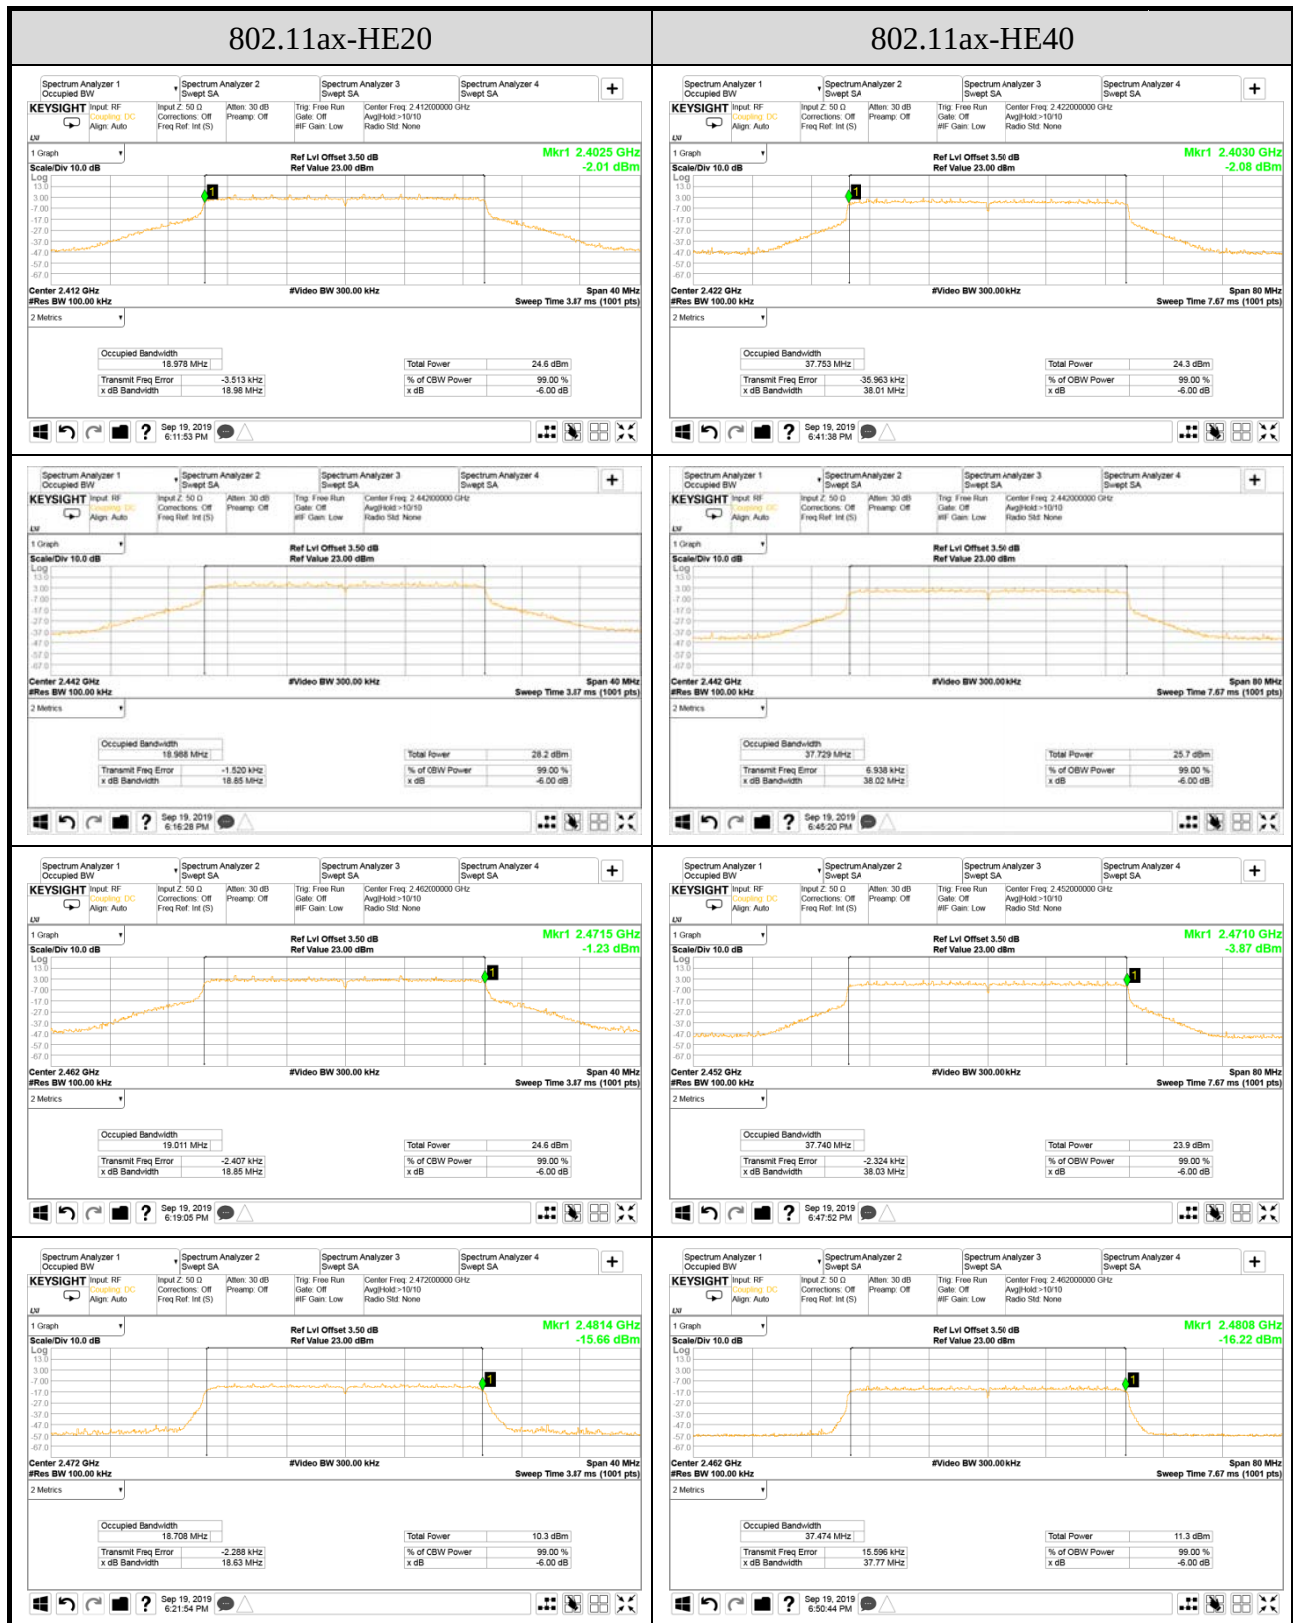


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

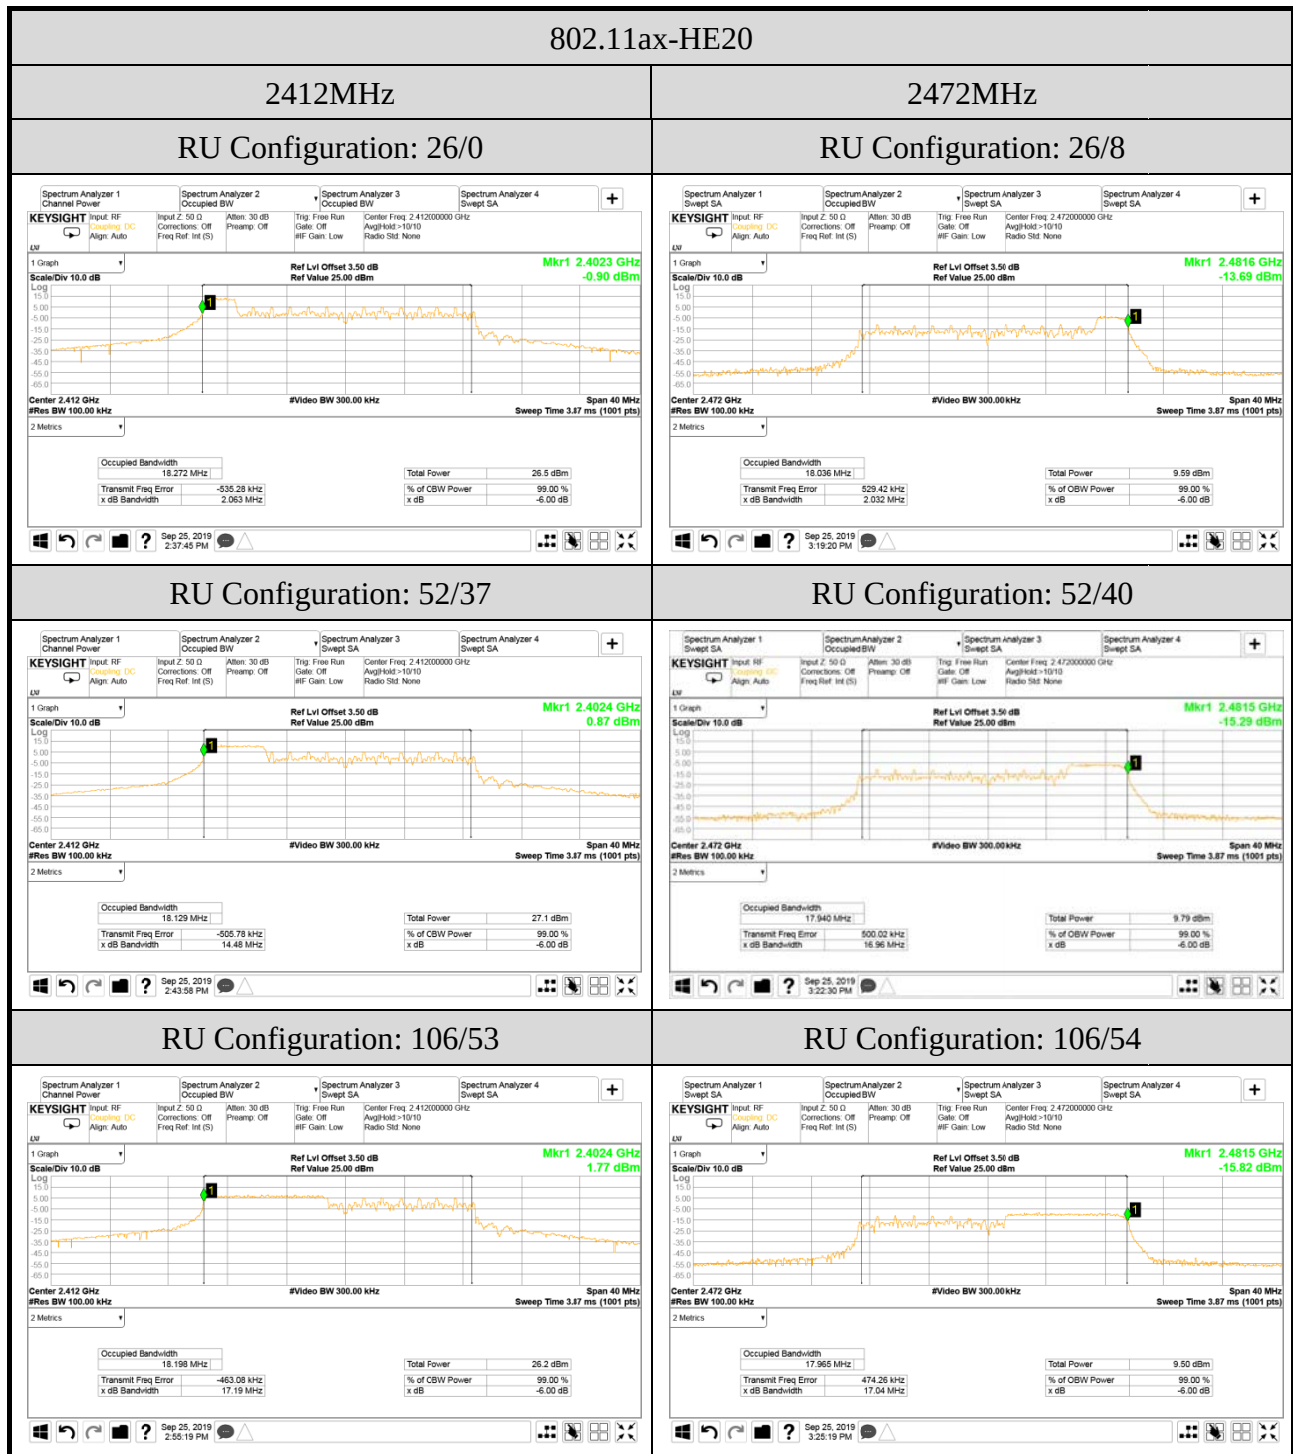

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

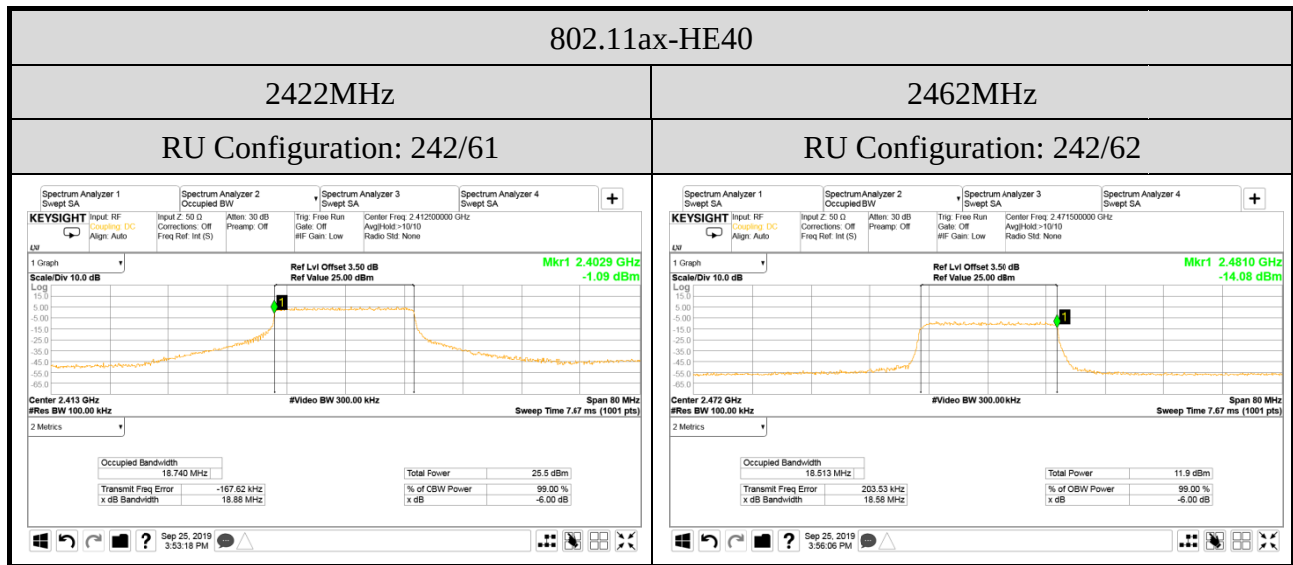

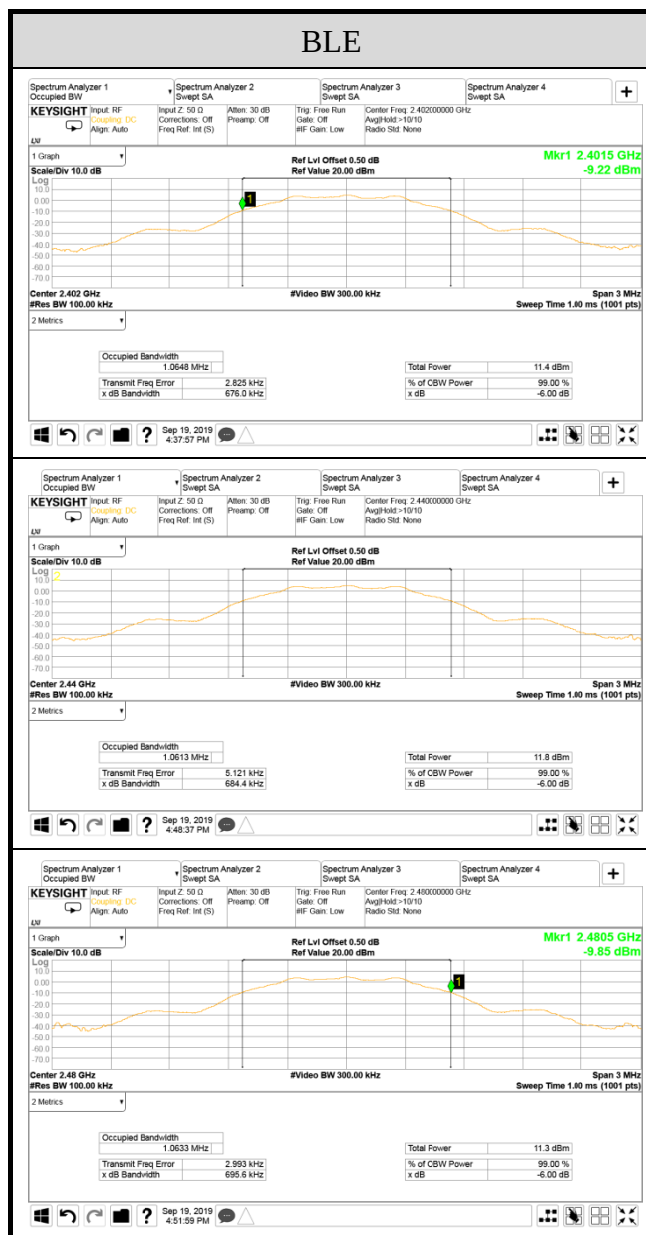

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2019/09/18 ~ 12/19	Temp./Hum.	24~25°C / 51~55%
Test Voltage	AC 120V, 60Hz (via AC Adapter)	Tested By	Martin Chen
Cable Loss	---		

A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11b	2412	21.72	21.89	21.89	0.155	2.79	24.68	0.294	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P.)
	2417	22.40	22.43	22.43	0.175		25.22	0.333	
	2442	22.53	22.52	22.53	0.179		25.32	0.340	
	2457	22.52	22.41	22.52	0.179		25.31	0.340	
	2462	21.61	21.55	21.61	0.145		24.40	0.275	
	2467	20.72	20.65	20.72	0.118		23.51	0.224	
	2472	15.64	15.56	15.64	0.037		18.43	0.070	

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11b	2412	21.82	21.99	21.99	0.158
	2417	22.43	22.16	22.43	0.175
	2442	22.26	22.40	22.40	0.174
	2457	22.32	22.31	22.32	0.171
	2462	21.45	21.29	21.45	0.140
	2467	20.59	20.74	20.74	0.119
	2472	15.42	15.47	15.47	0.035

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11g	2412	21.59	21.78	21.78	0.151	2.79	24.57	0.286	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	22.49	22.46	22.49	0.177		25.28	0.337	
	2442	23.71	23.81	23.81	0.240		26.60	0.457	
	2457	22.77	22.64	22.77	0.189		25.56	0.360	
	2462	22.14	22.05	22.14	0.164		24.93	0.311	
	2467	19.81	19.79	19.81	0.096		22.60	0.182	
	2472	12.92	12.29	12.92	0.020		15.71	0.037	

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11g	2412	21.52	21.73	21.73	0.149
	2417	22.30	22.31	22.31	0.170
	2442	23.47	23.60	23.60	0.229
	2457	22.82	22.47	22.82	0.191
	2462	22.21	21.84	22.21	0.166
	2467	19.76	19.72	19.76	0.095
	2472	12.67	12.28	12.67	0.018

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	19.04	19.25	22.16	0.164	2.79	24.95	0.313	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.21	20.11	23.17	0.207		25.96	0.394	
	2442	22.01	21.96	25.00	0.316		27.79	0.601	
	2457	20.38	20.34	23.37	0.217		26.16	0.413	
	2462	19.65	19.51	22.59	0.182		25.38	0.345	
	2467	17.11	17.01	20.07	0.102		22.86	0.193	
	2472	10.01	9.81	12.92	0.020		15.71	0.037	

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11n-HT20	2412	19.02	19.19	22.12	0.163
	2417	20.04	19.85	22.96	0.198
	2442	22.03	21.98	25.02	0.318
	2457	20.38	20.19	23.30	0.214
	2462	19.66	19.43	22.56	0.180
	2467	16.98	17.10	20.05	0.101
	2472	9.77	9.84	12.82	0.019

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	19.32	19.22	22.28	0.169	2.79	25.07	0.321	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.22	18.17	21.21	0.132		24.00	0.251	
	2442	19.96	19.82	22.90	0.195		25.69	0.371	
	2447	19.98	19.93	22.97	0.198		25.76	0.377	
	2452	18.69	18.64	21.68	0.147		24.47	0.280	
	2457	15.36	15.14	18.26	0.067		21.05	0.127	
	2462	12.02	11.02	14.56	0.029		17.35	0.054	

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11n-HT40	2422	19.15	19.20	22.19	0.166
	2427	18.13	18.23	21.19	0.132
	2442	19.80	19.83	22.83	0.192
	2447	19.91	19.76	22.85	0.193
	2452	18.67	18.45	21.57	0.144
	2457	15.37	14.99	18.19	0.066
	2462	11.84	10.76	14.34	0.027

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	18.98	19.22	22.11	0.163	2.79	24.90	0.309	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.23	20.17	23.21	0.209		26.00	0.398	
	2442	21.93	21.95	24.95	0.313		27.74	0.594	
	2457	20.40	20.21	23.32	0.215		26.11	0.408	
	2462	19.63	19.53	22.59	0.182		25.38	0.345	
	2467	16.98	17.04	20.02	0.100		22.81	0.191	
	2472	10.21	9.91	13.07	0.020		15.86	0.039	

Note: The results have been included cable loss.

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE20	2412	18.94	19.30	22.13	0.163
	2417	20.04	20.16	23.11	0.205
	2442	21.82	21.77	24.81	0.303
	2457	20.12	20.01	23.08	0.203
	2462	19.64	19.41	22.54	0.179
	2467	17.00	17.13	20.08	0.102
	2472	10.30	9.65	13.00	0.020

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	19.08	19.13	22.12	0.163	2.79	24.91	0.310	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.02	17.94	20.99	0.126		23.78	0.239	
	2442	19.84	19.79	22.83	0.192		25.62	0.365	
	2447	19.81	19.73	22.78	0.190		25.57	0.361	
	2452	18.35	18.41	21.39	0.138		24.18	0.262	
	2457	15.11	14.94	18.04	0.064		20.83	0.121	
	2462	11.93	10.60	14.33	0.027		17.12	0.052	

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE40	2422	18.86	19.07	21.98	0.158
	2427	17.96	17.75	20.87	0.122
	2442	19.83	19.59	22.72	0.187
	2447	19.77	19.49	22.64	0.184
	2452	18.33	18.16	21.26	0.134
	2457	15.08	14.81	17.96	0.063
	2462	11.96	10.67	14.37	0.027

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	23.52	23.65	26.60	0.457	2.79	29.39	0.869	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		23.55	23.62	26.60	0.457		29.39	0.869	
	106/53		23.42	23.67	26.56	0.453		29.35	0.861	
	26/8	2472	10.74	10.07	13.43	0.022		16.22	0.042	
	52/40		10.93	10.11	13.55	0.023		16.34	0.043	
	106/54		10.97	10.24	13.63	0.023		16.42	0.044	

SPOT CHECK

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
			Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE20	26/0	2412	23.20	23.38	26.30	0.427
	52/37		23.78	23.53	26.67	0.465
	106/53		23.03	23.44	26.25	0.422
	26/8	2472	10.84	9.68	13.31	0.021
	52/40		11.12	9.85	13.54	0.023
	106/54		10.96	10.35	13.68	0.023

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	23.44	13.65	23.87	0.244	2.79	26.66	0.463	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	14.18	14.08	17.14	0.052		19.93	0.098	

SPOT CHECK

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
			Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE40	242/61	2422	23.77	13.79	24.19	0.262
	242/62	2467	14.11	14.21	17.17	0.052

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
BLE (1M)	2402	4.85	---	4.85	0.003	2.79	7.64	0.006	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2440	5.37	---	5.37	0.003		8.16	0.007	
	2480	4.66	---	4.66	0.003		7.45	0.006	
BLE (2M)	2402	4.84	---	4.84	0.003		7.63	0.006	
	2440	5.37	---	5.37	0.003		8.16	0.007	
	2480	4.66	---	4.66	0.003		7.45	0.006	
BLE (PHY Coded S2)	2402	4.82	---	4.82	0.003		7.61	0.006	
	2440	5.36	---	5.36	0.003		8.15	0.007	
	2480	4.65	---	4.65	0.003		7.44	0.006	
BLE (PHY Coded S8)	2402	4.82	---	4.82	0.003		7.61	0.006	
	2440	5.36	---	5.36	0.003		8.15	0.007	
	2480	4.65	---	4.65	0.003		7.44	0.006	

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
BLE (1M)	2402	5.01	---	5.01	0.003
	2440	5.42	---	5.42	0.003
	2480	4.62	---	4.62	0.003

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

A.4.2 Average Output Power (Reporting only)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11b	2412	19.16	19.35	0	19.35	0.086	2.79	22.14	0.164	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	19.91	19.96		19.96	0.099		22.75	0.188	
	2442	20.04	20.02		20.04	0.101		22.83	0.192	
	2457	20.02	19.95		20.02	0.100		22.81	0.191	
	2462	19.08	18.91		19.08	0.081		21.87	0.154	
	2467	18.18	18.08		18.18	0.066		20.97	0.125	
	2472	13.08	13.05		13.08	0.020		15.87	0.039	

SPOT CHECK

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11b	2412	19.25	19.13	0	19.25	0.084
	2417	19.77	20.08		20.08	0.102
	2442	20.17	19.79		20.17	0.104
	2457	19.72	19.59		19.72	0.094
	2462	19.48	18.78		19.48	0.089
	2467	17.89	18.09		18.09	0.064
	2472	13.47	13.44		13.47	0.022

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11g	2412	16.72	16.91	0	16.91	0.049	2.79	19.70	0.093	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	17.94	17.9		17.94	0.062		20.73	0.118	
	2442	19.63	19.74		19.74	0.094		22.53	0.179	
	2457	18.21	18.05		18.21	0.066		21.00	0.126	
	2462	17.47	17.37		17.47	0.056		20.26	0.106	
	2467	14.79	14.78		14.79	0.030		17.58	0.057	
	2472	1.52	1.28		1.52	0.001		4.31	0.003	

SPOT CHECK

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11g	2412	16.72	16.53	0	16.72	0.047
	2417	17.89	18.07		18.07	0.064
	2442	19.55	19.93		19.93	0.098
	2457	17.91	18.29		18.29	0.067
	2462	17.42	17.76		17.76	0.060
	2467	15.06	14.81		15.06	0.032
	2472	1.87	1.11		1.87	0.002

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	14.01	14.23	0	17.13	0.052	2.79	19.92	0.098	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.45	15.38		18.43	0.070		21.22	0.132	
	2442	17.15	17.13		20.15	0.104		22.94	0.197	
	2457	15.63	15.55		18.60	0.072		21.39	0.138	
	2462	14.83	14.63		17.74	0.059		20.53	0.113	
	2467	11.95	11.84		14.91	0.031		17.70	0.059	
	2472	-0.04	-0.86		2.58	0.002		5.37	0.003	

SPOT CHECK

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11n-HT20	2412	14.26	14.53	0	17.41	0.055
	2417	15.11	15.31		18.22	0.066
	2442	17.03	17.5		20.28	0.107
	2457	15.28	15.55		18.43	0.070
	2462	14.83	15.01		17.93	0.062
	2467	11.76	11.82		14.80	0.030
	2472	0.17	-0.93		2.67	0.002

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	13.83	13.81	0	16.83	0.048	2.79	19.62	0.092	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.8	12.73		15.78	0.038		18.57	0.072	
	2442	14.65	14.59		17.63	0.058		20.42	0.110	
	2447	14.78	14.73		17.77	0.060		20.56	0.114	
	2452	13.14	13.22		16.19	0.042		18.98	0.079	
	2457	9.53	9.42		12.49	0.018		15.28	0.034	
	2462	1.41	0.54		4.01	0.003		6.80	0.005	

SPOT CHECK

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11n-HT40	2422	14.23	13.52	0	16.90	0.049
	2427	12.68	13.06		15.88	0.039
	2442	14.41	14.59		17.51	0.056
	2447	14.85	14.65		17.76	0.060
	2452	13.43	13.26		16.36	0.043
	2457	9.87	9.23		12.57	0.018
	2462	1.8	0.2		4.08	0.003

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	13.92	14.12	17.03	0.050	2.79	19.82	0.096	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.28	15.22	18.26	0.067		21.05	0.127	
	2442	17.03	17.05	20.05	0.101		22.84	0.192	
	2457	15.56	15.39	18.49	0.071		21.28	0.134	
	2462	14.68	14.58	17.64	0.058		20.43	0.110	
	2467	11.78	11.79	14.80	0.030		17.59	0.057	
	2472	-0.11	-0.95	2.50	0.002		5.29	0.003	

SPOT CHECK

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE20	2412	13.86	14.49	17.20	0.052
	2417	15.02	14.93	17.99	0.063
	2442	17.11	17.44	20.29	0.107
	2457	15.48	15.29	18.40	0.069
	2462	14.44	14.51	17.49	0.056
	2467	11.97	11.81	14.90	0.031
	2472	-0.32	-1.21	2.27	0.002

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	13.66	13.70	16.69	0.047	2.79	19.48	0.089	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.61	12.49	15.56	0.036		18.35	0.068	
	2442	14.47	14.42	17.46	0.056		20.25	0.106	
	2447	14.58	14.55	17.58	0.057		20.37	0.109	
	2452	12.96	13.00	15.99	0.040		18.78	0.076	
	2457	9.28	9.24	12.27	0.017		15.06	0.032	
	2462	1.06	0.14	3.63	0.002		6.42	0.004	

SPOT CHECK

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE40	2422	13.65	13.93	16.80	0.048
	2427	12.27	12.37	15.33	0.034
	2442	14.61	14.81	17.72	0.059
	2447	14.35	14.39	17.38	0.055
	2452	12.81	13.24	16.04	0.040
	2457	9.66	9.48	12.58	0.018
	2462	1.21	-0.03	3.64	0.002

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	14.13	14.45	0	17.30	0.054	2.79	20.09	0.102	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		14.26	14.43		17.36	0.054		20.15	0.104	
	106/53		14.28	14.48		17.39	0.055		20.18	0.104	
	26/8	2472	-1.36	-2.57		1.09	0.001		3.88	0.002	
	52/40		-1.13	-2.29		1.34	0.001		4.13	0.003	
	106/54		-1.02	-2.05		1.51	0.001		4.30	0.003	

SPOT CHECK

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
			Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE20	26/0	2412	13.97	14.6	0	17.31	0.054
	52/37		14.12	14.14		17.14	0.052
	106/53		14.11	14.66		17.40	0.055
	26/8	2472	-0.96	-2.3		1.43	0.001
	52/40		-0.99	-2.43		1.36	0.001
	106/54		-0.84	-2.03		1.62	0.001

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	13.85	14.08	0	16.98	0.050	2.79	19.77	0.095	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	1.27	1.17		4.23	0.003		7.02	0.005	


SPOT CHECK

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
			Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE40	242/61	2422	13.48	14.27	0	16.90	0.049
	242/62	2467	1.60	1.20		4.41	0.003

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

A.4.3 Measurement Plots

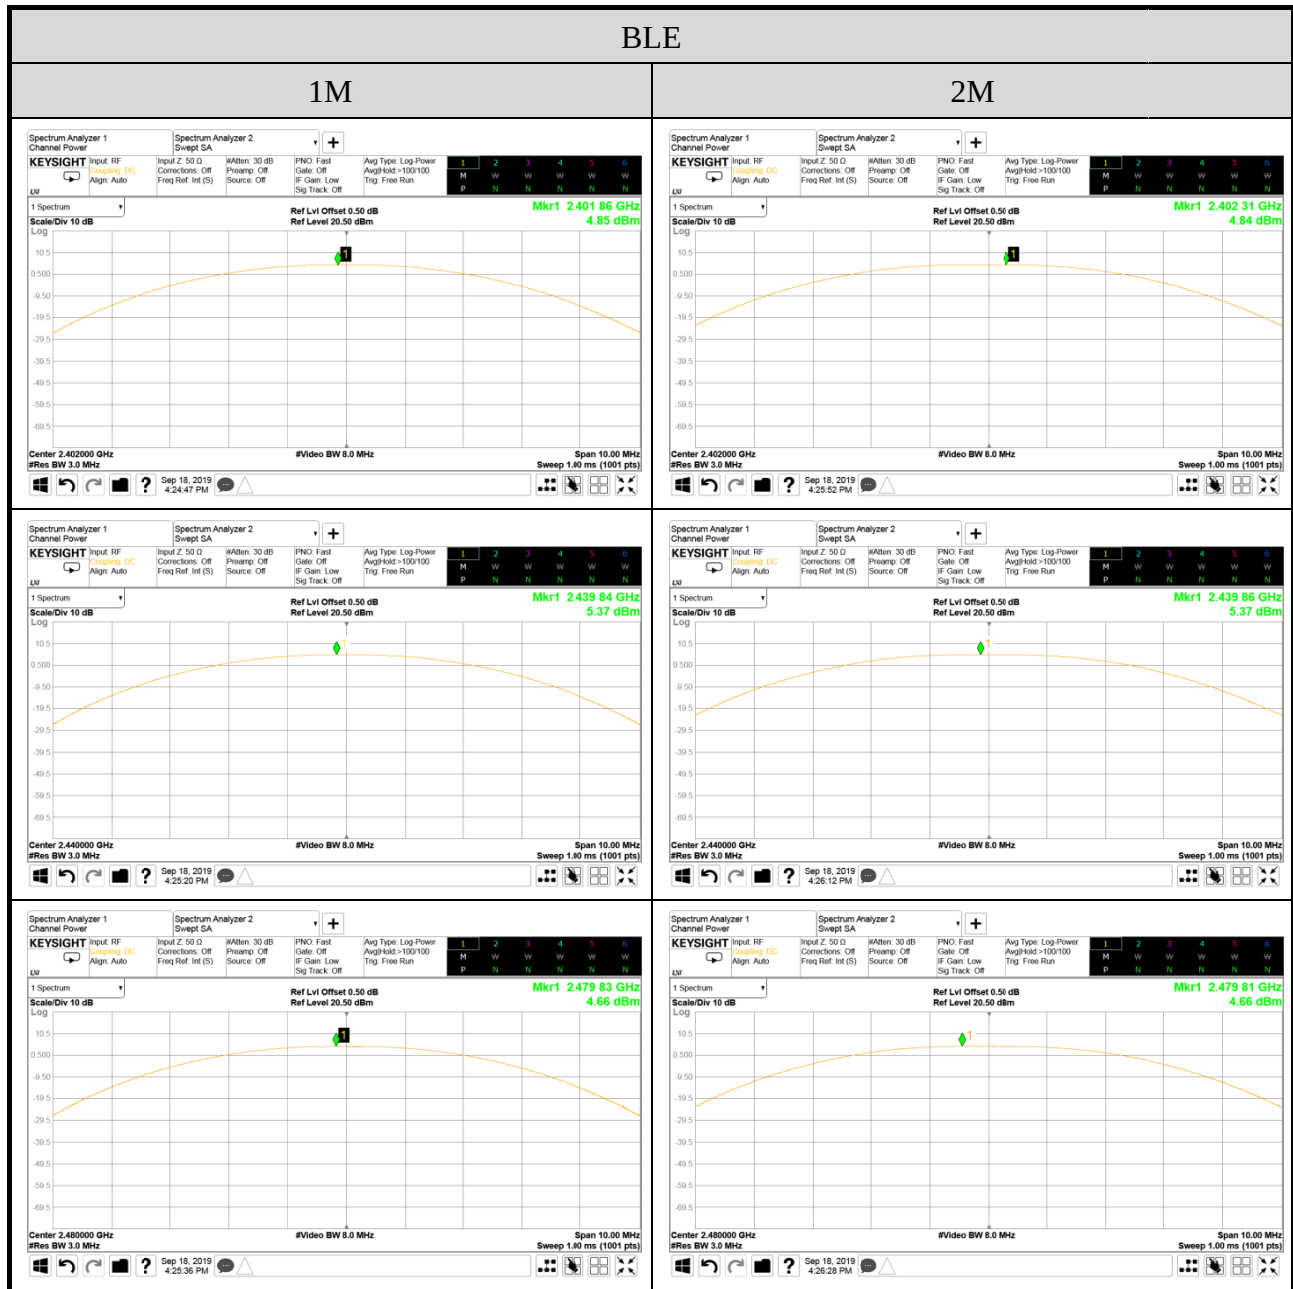

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

