

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	153
A.2.3 Emissions in Non-restricted Frequency Bands.....	168
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	169
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	169
A.3.2 Measurement Plots	179
A.4 POWER SPECTRAL DENSITY	236
A.4.1 Power Spectral Density Result	236
A.4.2 Measurement Plots	245
A.5 FREQUENCY STABILITY	287
A.5.1 Frequency stability Result	287

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

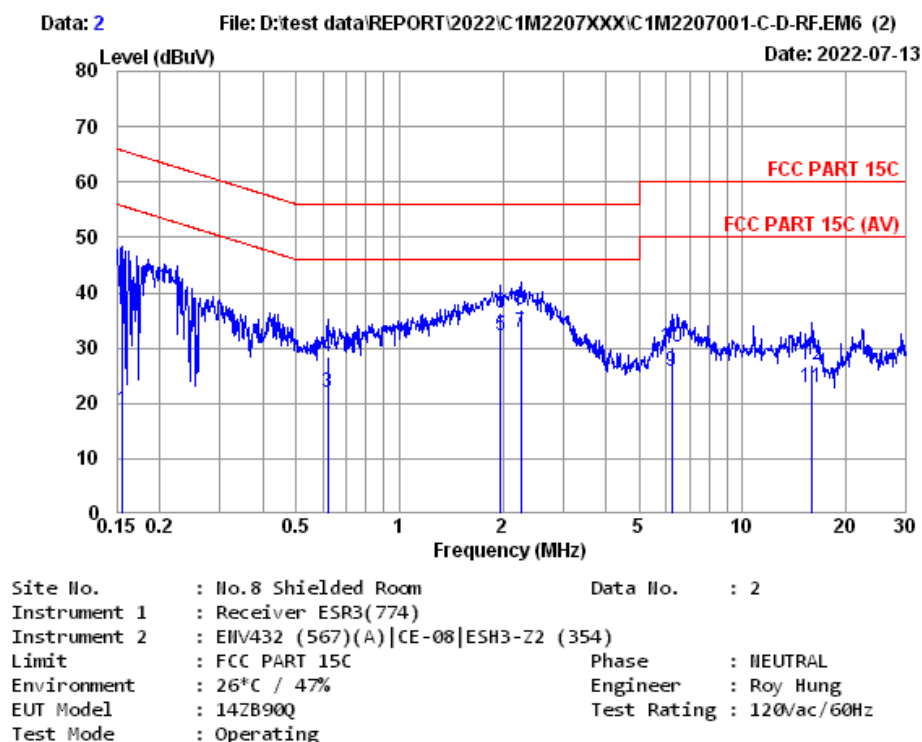


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.156	10.34	0.03	9.85	-1.32	18.90	55.69	36.79	Average
2	0.156	10.34	0.03	9.85	19.98	40.20	65.69	25.49	QP
3	0.617	10.33	0.03	9.85	1.82	22.03	46.00	23.97	Average
4	0.617	10.33	0.03	9.85	8.08	28.29	56.00	27.71	QP
5	1.970	10.36	0.06	9.86	11.97	32.25	46.00	13.75	Average
6	1.970	10.36	0.06	9.86	16.11	36.39	56.00	19.61	QP
7	2.261	10.37	0.07	9.86	12.47	32.77	46.00	13.23	Average
8	2.261	10.37	0.07	9.86	16.68	36.98	56.00	19.02	QP
9	6.219	10.51	0.11	9.87	5.21	25.70	50.00	24.30	Average
10	6.219	10.51	0.11	9.87	9.79	30.28	60.00	29.72	QP
11	15.970	10.91	0.17	9.92	1.92	22.92	50.00	27.08	Average
12	15.970	10.91	0.17	9.92	6.11	27.11	60.00	32.89	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/07/13	Temp./Hum.	26°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

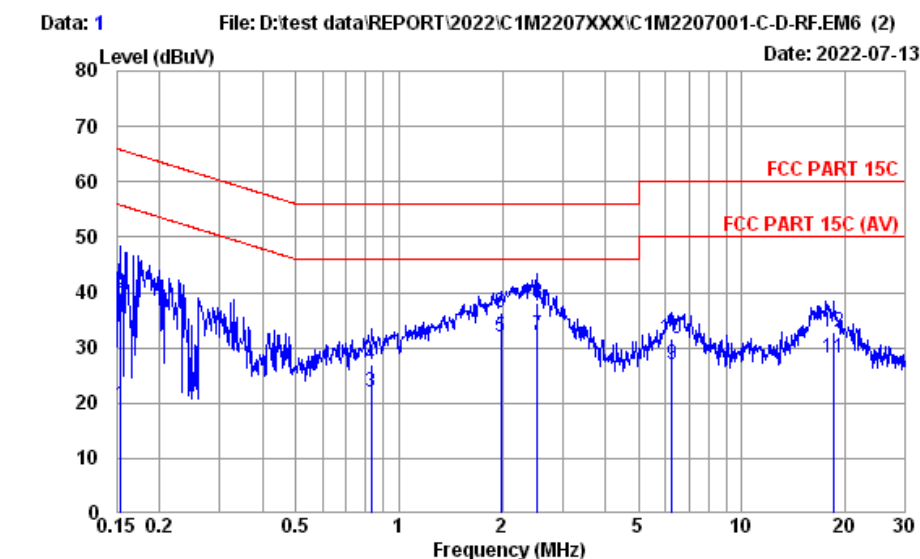

Site No. : No.8 Shielded Room Data No. : 1
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC PART 15C Phase : LINE
Environment : 26°C / 47% Engineer : Roy Hung
EUT Model : 14ZB90Q Test Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.22	0.03	9.85	-0.50	19.60	55.78	36.18	Average
2	0.154	10.22	0.03	9.85	19.79	39.89	65.78	25.89	QP
3	0.830	10.23	0.04	9.85	1.98	22.10	46.00	23.90	Average
4	0.830	10.23	0.04	9.85	6.77	26.89	56.00	29.11	QP
5	1.980	10.25	0.06	9.86	11.75	31.92	46.00	14.08	Average
6	1.980	10.25	0.06	9.86	16.26	36.43	56.00	19.57	QP
7	2.527	10.26	0.07	9.86	11.98	32.17	46.00	13.83	Average
8	2.527	10.26	0.07	9.86	17.92	38.11	56.00	17.89	QP
9	6.252	10.35	0.11	9.87	6.68	27.01	50.00	22.99	Average
10	6.252	10.35	0.11	9.87	11.31	31.64	60.00	28.36	QP
11	18.622	10.62	0.18	9.93	7.53	28.26	50.00	21.74	Average
12	18.622	10.62	0.18	9.93	12.17	32.90	60.00	27.10	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/07/18 ~ 20	Temp./Hum.	23 ~ 25°C/59 ~ 63%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.86	1.46	26.48	29.21	27.05	40.00	12.95	Peak
218.180	16.31	3.92	25.75	42.06	36.54	46.00	9.46	Peak
233.700	17.24	4.09	25.72	38.64	34.25	46.00	11.75	Peak
400.540	21.40	5.93	26.44	32.61	33.50	46.00	12.50	Peak
540.220	23.61	6.90	27.24	31.18	34.45	46.00	11.55	Peak
976.720	26.94	9.17	26.72	28.32	37.71	54.00	16.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.48	26.48	40.34	37.86	40.00	2.14	Peak
114.390	17.61	2.79	26.19	35.69	29.90	43.50	13.60	Peak
191.990	15.05	3.62	25.82	41.55	34.40	43.50	9.10	Peak
417.030	21.73	6.09	26.56	34.16	35.42	46.00	10.58	Peak
540.220	23.61	6.90	27.24	32.40	35.67	46.00	10.33	Peak
997.090	27.10	9.27	26.66	28.76	38.47	54.00	15.53	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

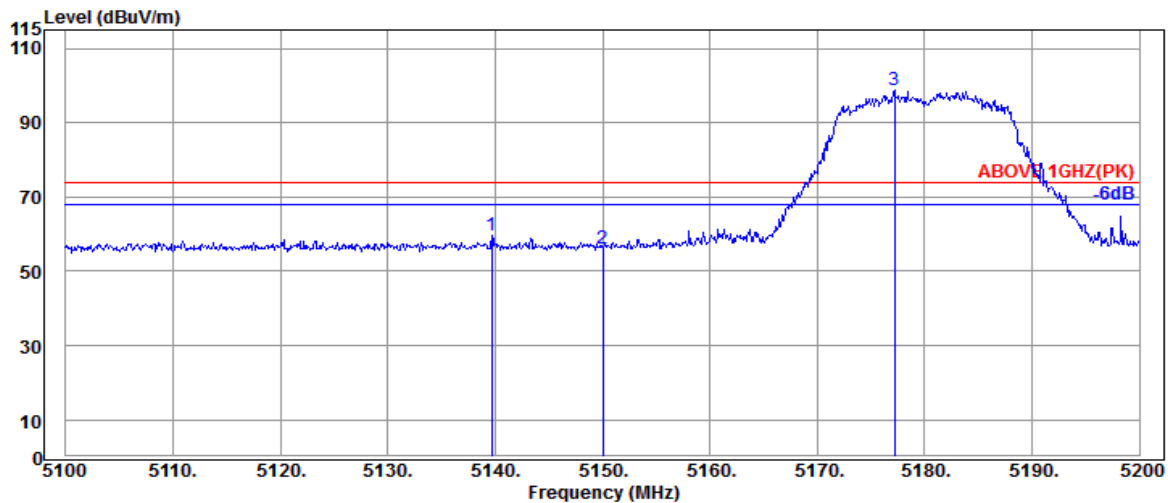

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5139.700	33.70	8.88	39.29	56.48	59.77	74.00	14.23	Peak
5150.000	33.70	8.88	39.29	53.02	56.31	74.00	17.69	Peak
@ 5177.200	33.70	8.90	39.28	95.38	98.70	---	---	Peak

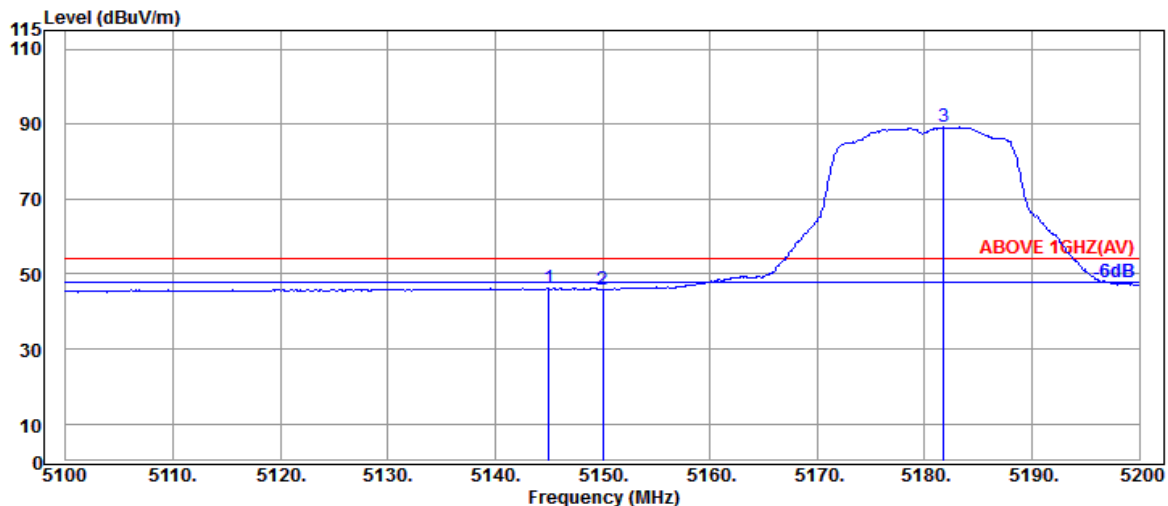


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5145.000	33.70	8.88	39.29	43.10	46.39	54.00	7.61	Average
5150.000	33.70	8.88	39.29	42.55	45.84	54.00	8.16	Average
@ 5181.800	33.70	8.90	39.28	85.83	89.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

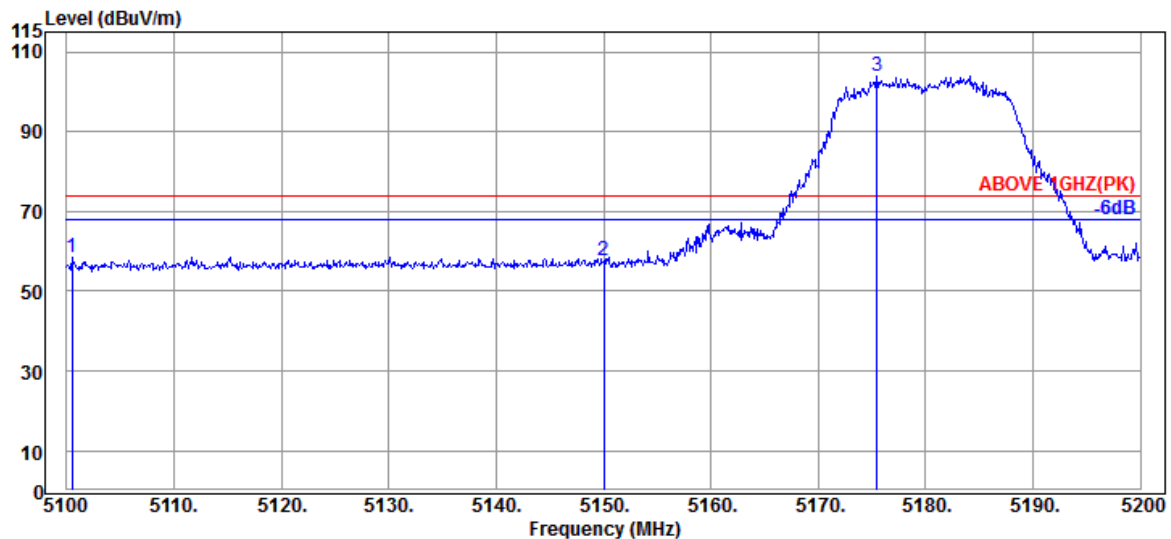

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.500	33.70	8.86	39.29	55.37	58.64	74.00	15.36	Peak
5150.000	33.70	8.88	39.29	54.44	57.73	74.00	16.27	Peak
@ 5175.500	33.70	8.90	39.28	100.75	104.07	---	---	Peak

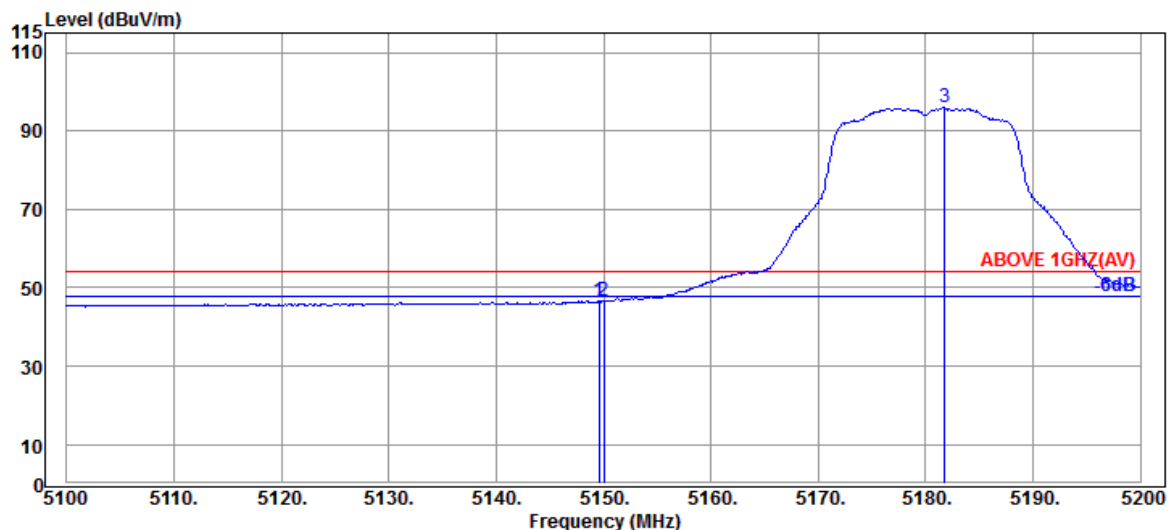

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
	5149.600	33.70	8.88	39.29	43.39	46.68	54.00	7.32	Average
	5150.000	33.70	8.88	39.29	43.25	46.54	54.00	7.46	Average
@	5181.800	33.70	8.90	39.28	92.63	95.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2207001

Report Number: EM-F220532

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

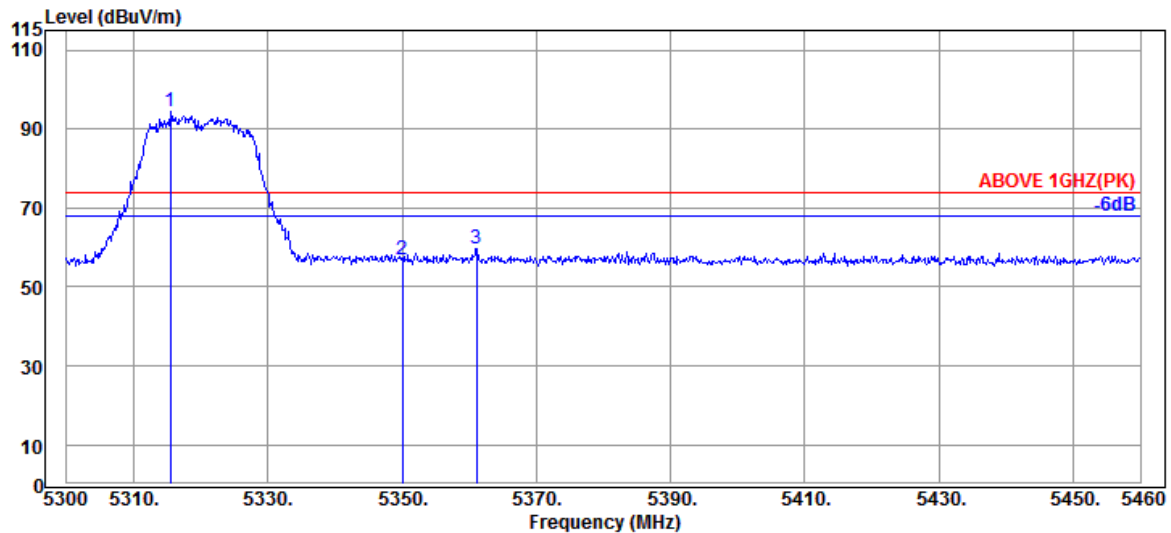

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.520	34.03	8.98	39.27	90.89	94.63	---	---	Peak
5350.080	33.90	8.99	39.27	53.36	56.98	74.00	17.02	Peak
5361.120	33.97	9.00	39.27	55.97	59.67	74.00	14.33	Peak

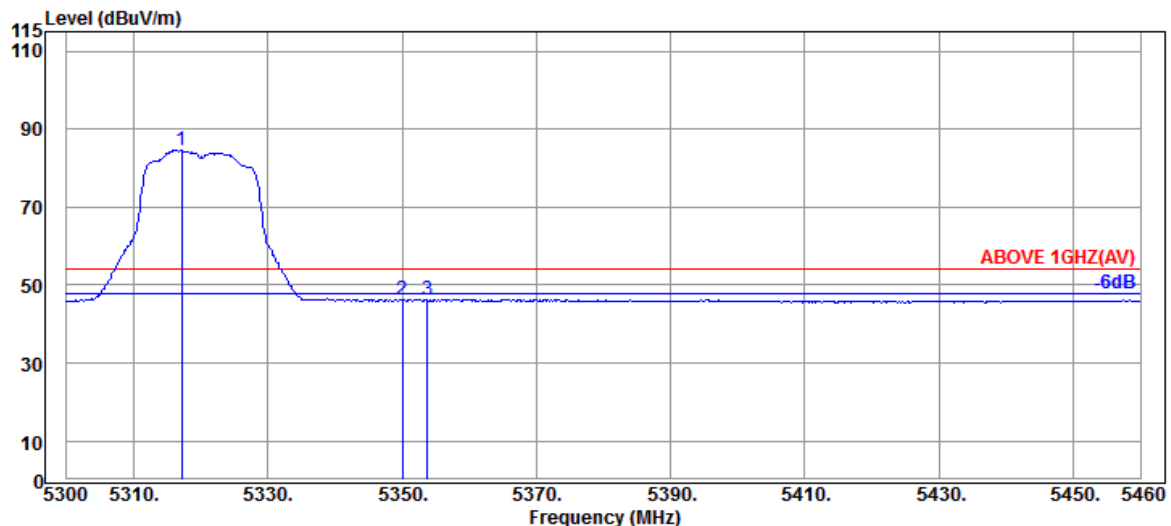

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.03	8.98	39.27	80.92	84.66	---	---	Average
5350.080	33.90	8.99	39.27	42.53	46.15	54.00	7.85	Average
5353.760	33.90	8.99	39.27	42.70	46.32	54.00	7.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2207001

Report Number: EM-F220532

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

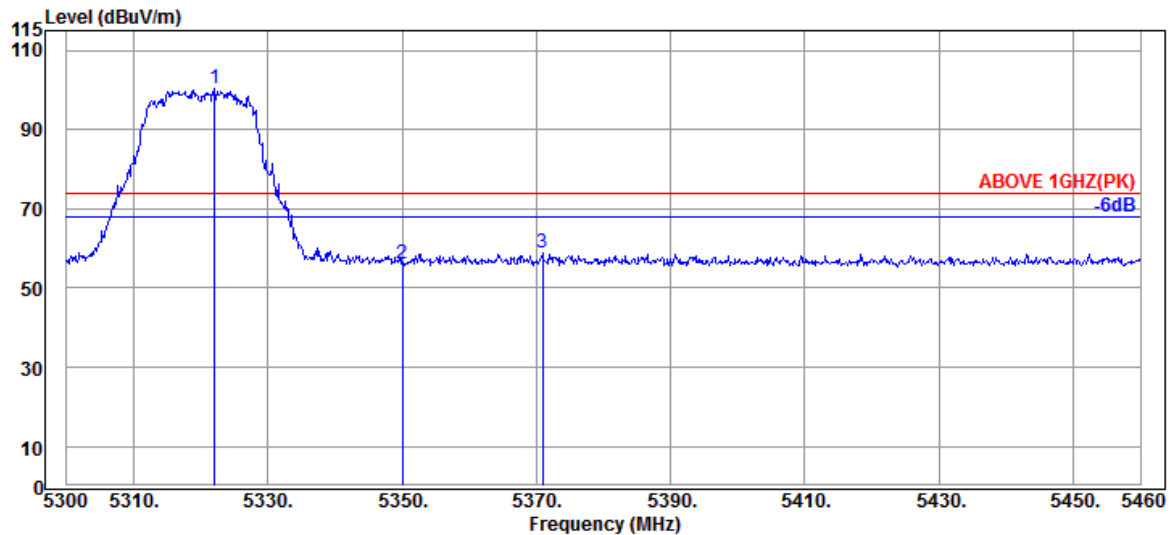

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.080	34.03	8.98	39.27	96.59	100.33	---	---	Peak
5350.080	33.90	8.99	39.27	52.39	56.01	74.00	17.99	Peak
5370.880	34.03	9.01	39.27	55.04	58.81	74.00	15.19	Peak

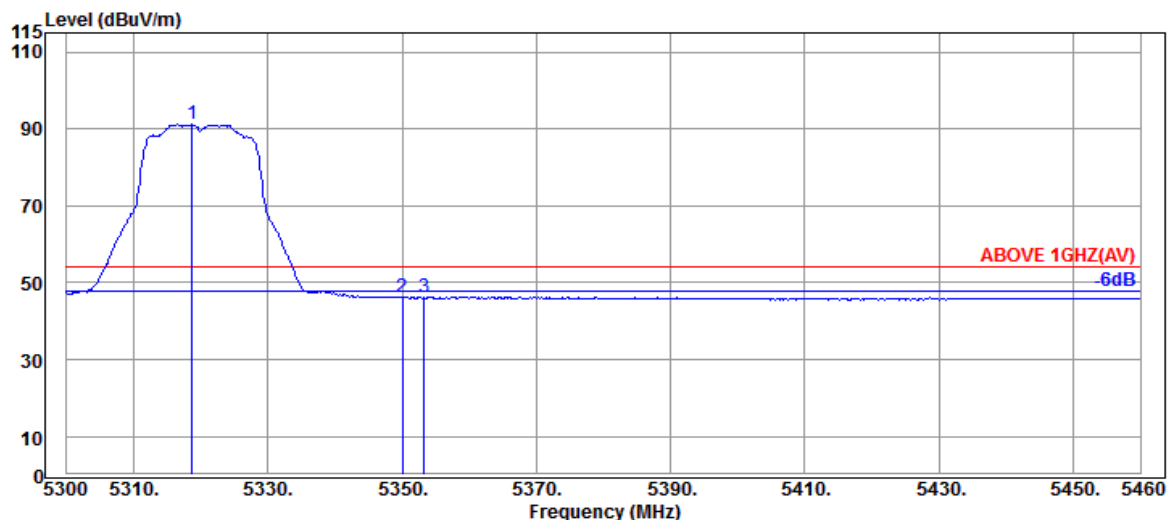

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.720	34.03	8.98	39.27	87.45	91.19	---	---	Average
5350.080	33.90	8.99	39.27	42.64	46.26	54.00	7.74	Average
5353.280	33.90	8.99	39.27	42.65	46.27	54.00	7.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

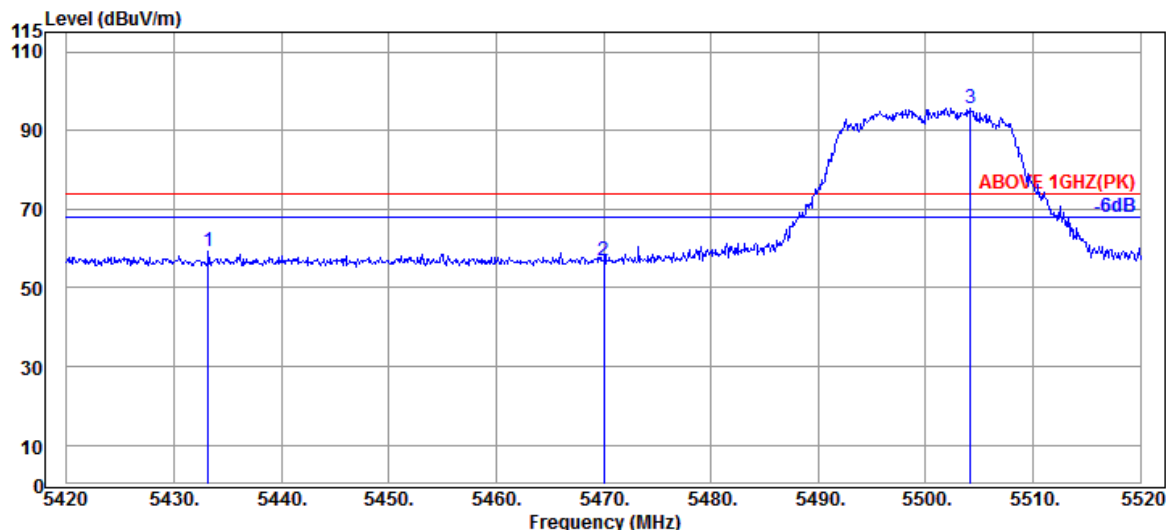

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.200	34.17	9.04	39.27	55.31	59.25	74.00	14.75	Peak
5470.000	34.17	9.06	39.26	52.86	56.83	74.00	17.17	Peak
@ 5504.200	34.10	9.08	39.26	91.80	95.72	---	---	Peak

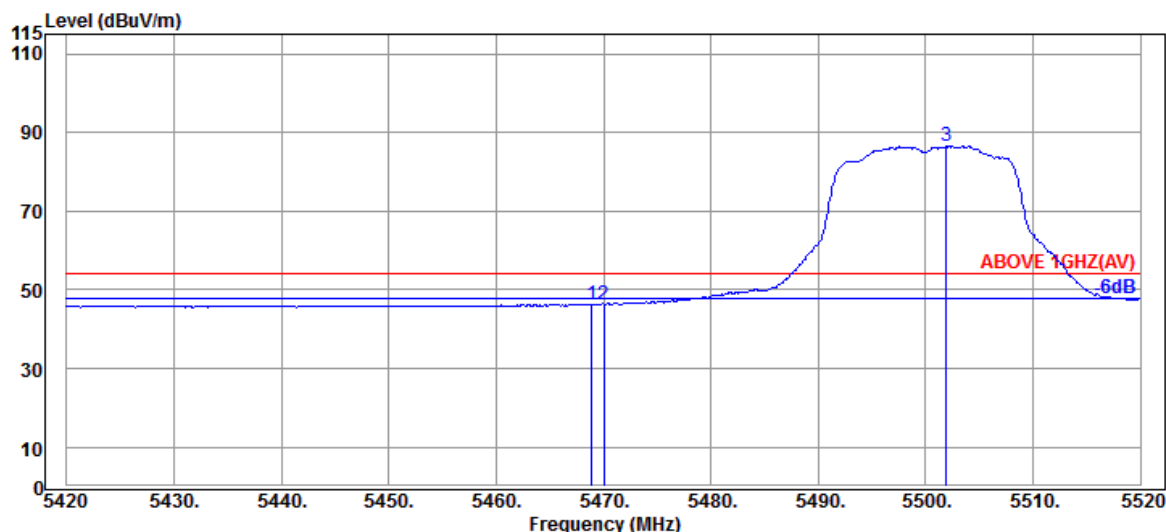

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.17	9.06	39.26	42.31	46.28	54.00	7.72	Average
5470.000	34.17	9.06	39.26	42.31	46.28	54.00	7.72	Average
@ 5501.900	34.10	9.08	39.26	82.57	86.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

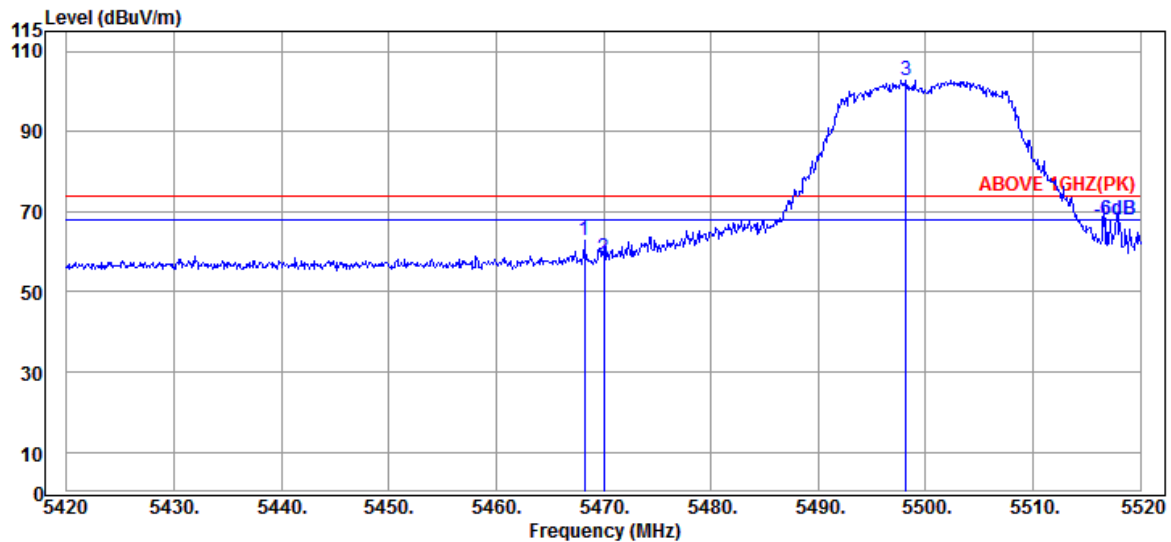

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.17	9.06	39.26	58.72	62.69	74.00	11.31	Peak
5470.000	34.17	9.06	39.26	54.46	58.43	74.00	15.57	Peak
@ 5498.200	34.10	9.08	39.26	98.91	102.83	---	---	Peak

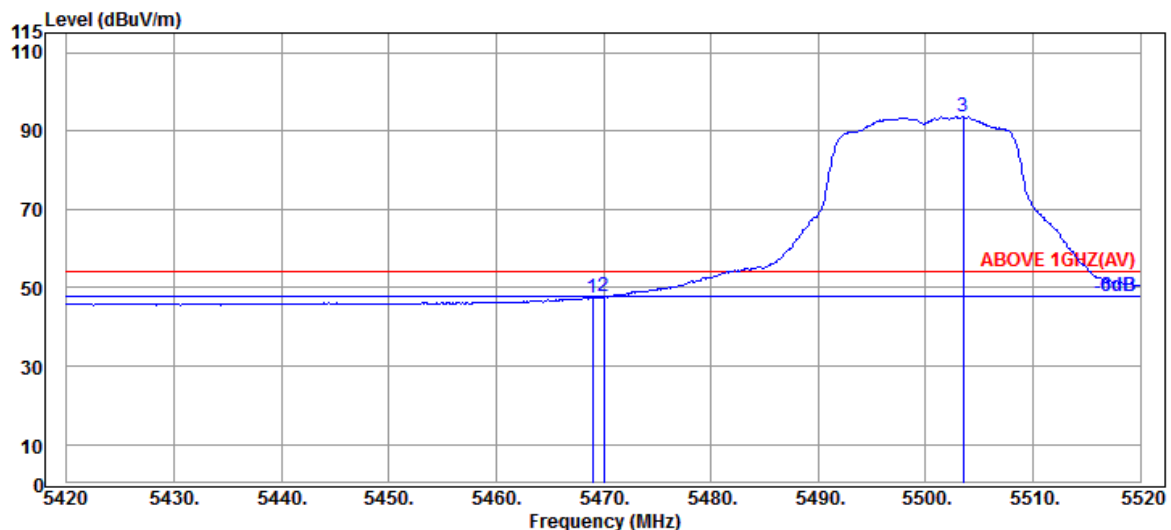

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	43.60	47.57	54.00	6.43	Average
5470.000	34.17	9.06	39.26	43.80	47.77	54.00	6.23	Average
@ 5503.500	34.10	9.08	39.26	89.65	93.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2207001

Report Number: EM-F220532


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

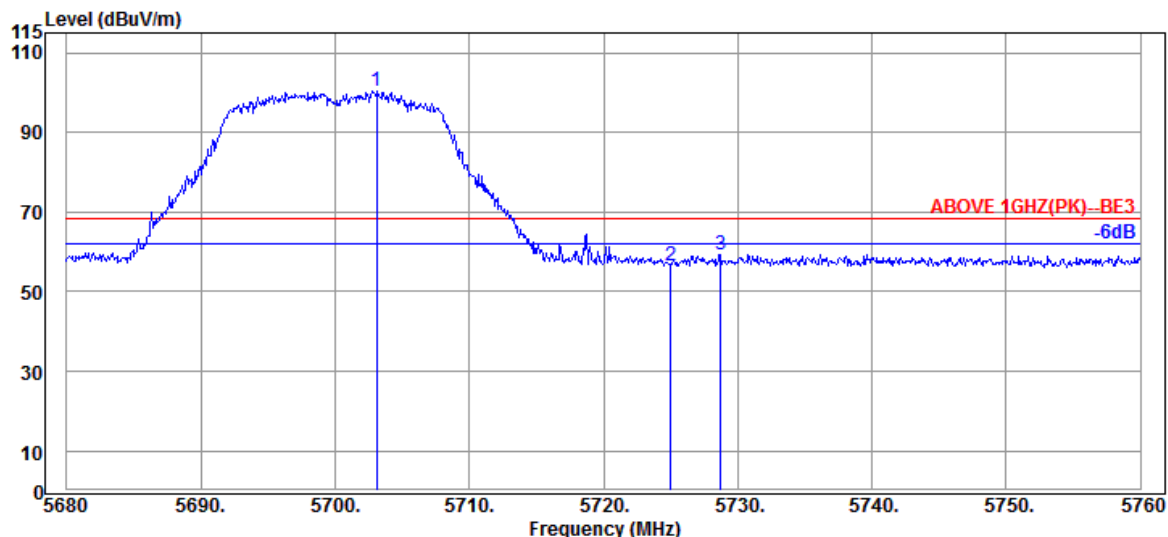

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5703.120	33.80	9.18	39.30	96.61	100.29	---	---	Peak
	5725.040	33.80	9.20	39.30	52.91	56.61	68.20	11.59	Peak
	5728.720	33.80	9.20	39.31	55.67	59.36	68.20	8.84	Peak

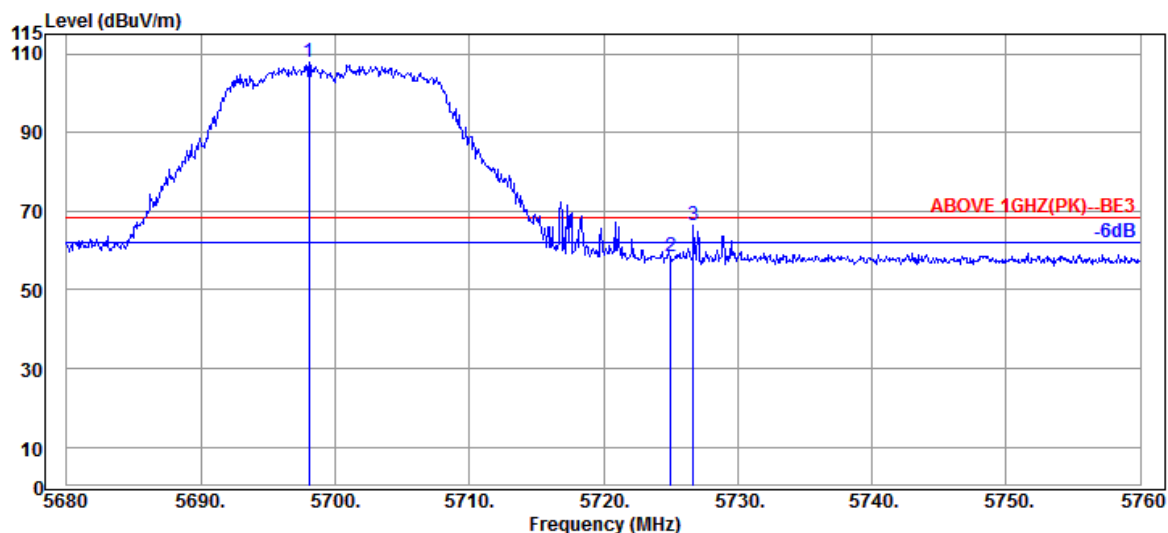

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.080	33.80	9.18	39.30	104.13	107.81	---	---	Peak
	5725.040	33.80	9.20	39.30	54.75	58.45	68.20	9.75	Peak
	5726.720	33.80	9.20	39.31	62.65	66.34	68.20	1.86	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

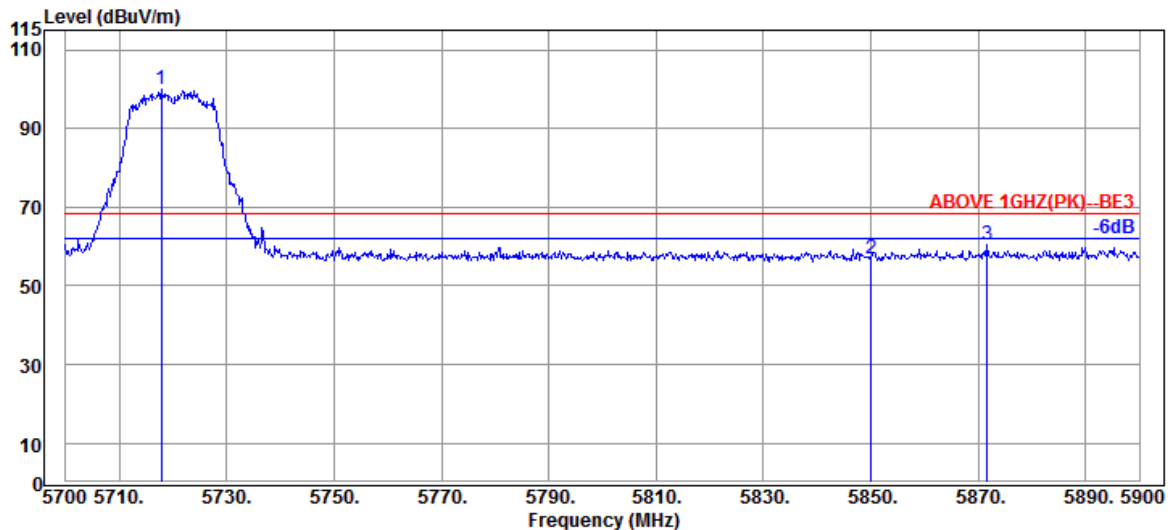

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.800	33.80	9.19	39.30	96.29	99.98	---	---	Peak
	5850.000	34.10	9.25	39.33	53.07	57.09	68.20	11.11	Peak
	5871.600	34.10	9.26	39.33	56.44	60.47	68.20	7.73	Peak

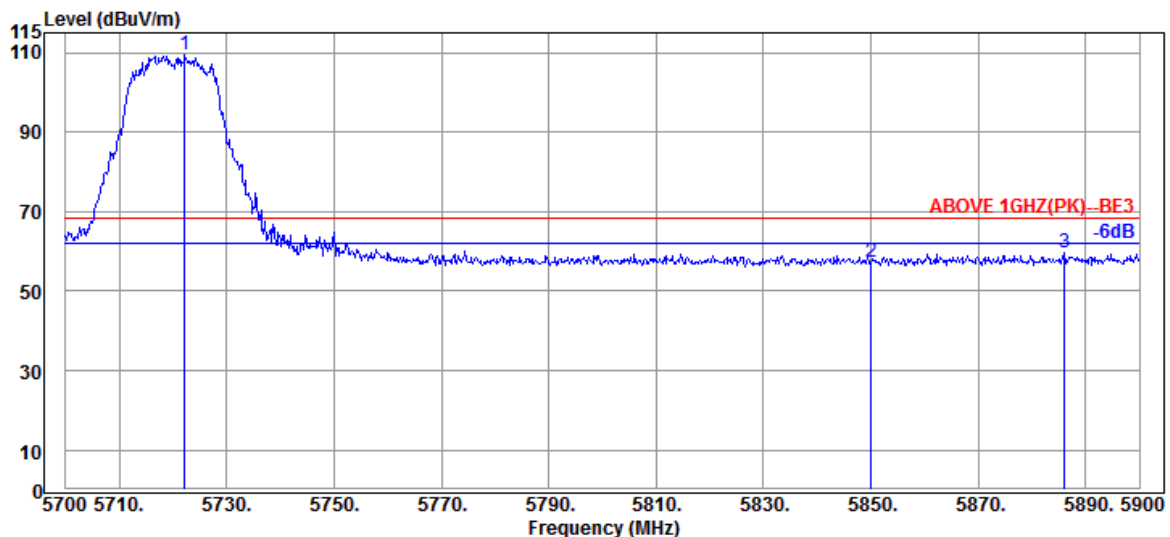

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.200	33.80	9.20	39.30	105.65	109.35	---	---	Peak
	5850.000	34.10	9.25	39.33	53.12	57.14	68.20	11.06	Peak
	5886.000	34.10	9.27	39.34	55.61	59.64	68.20	8.56	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2207001

Report Number: EM-F220532

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

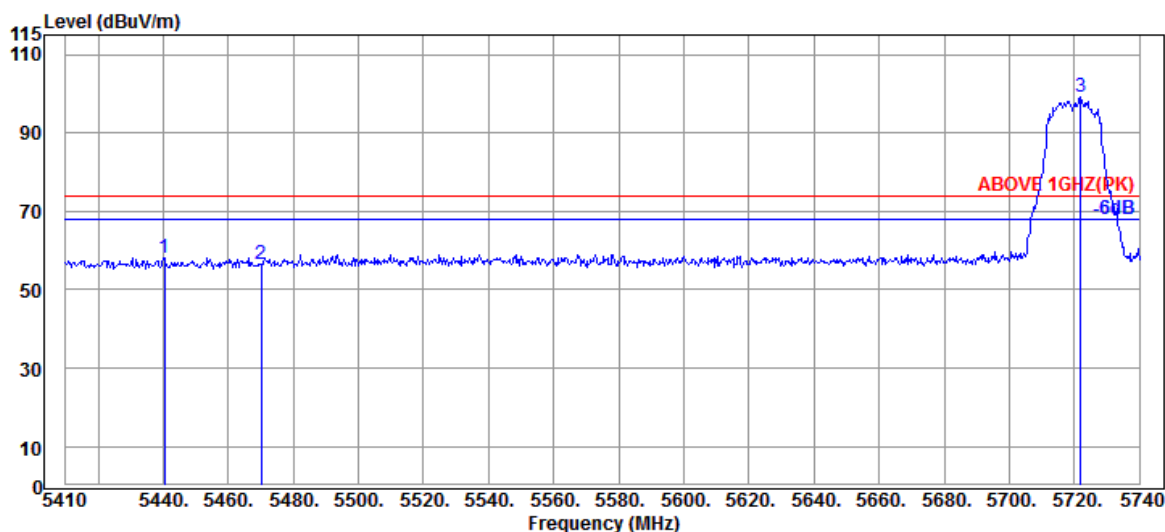

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.360	34.17	9.04	39.26	54.21	58.16	74.00	15.84	Peak
5470.060	34.17	9.06	39.26	52.47	56.44	74.00	17.56	Peak
@ 5721.850	33.80	9.19	39.30	95.35	99.04	---	---	Peak

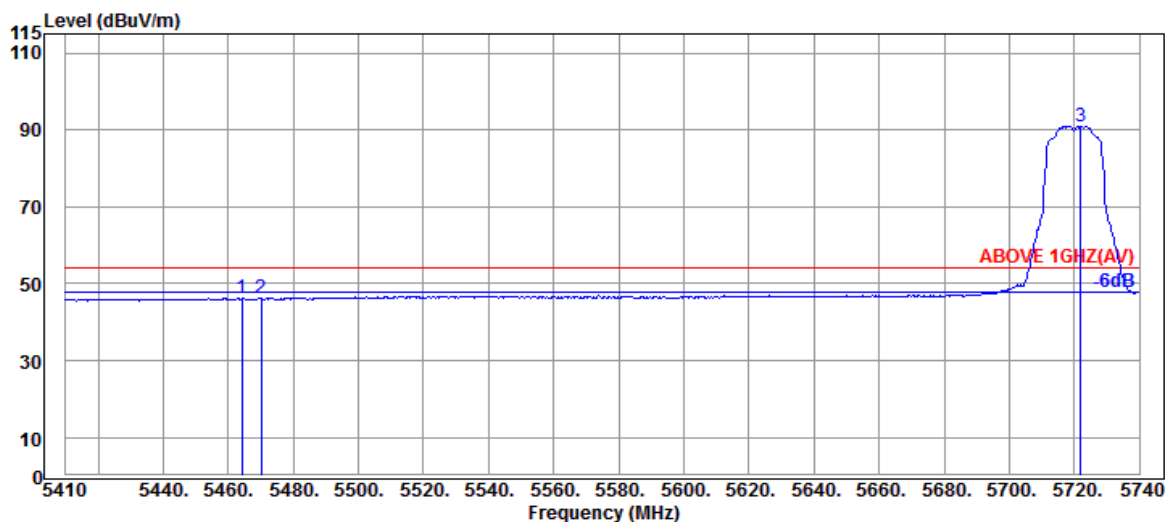

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.120	34.17	9.06	39.26	42.26	46.23	54.00	7.77	Average
5470.060	34.17	9.06	39.26	42.09	46.06	54.00	7.94	Average
@ 5721.850	33.80	9.19	39.30	87.40	91.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

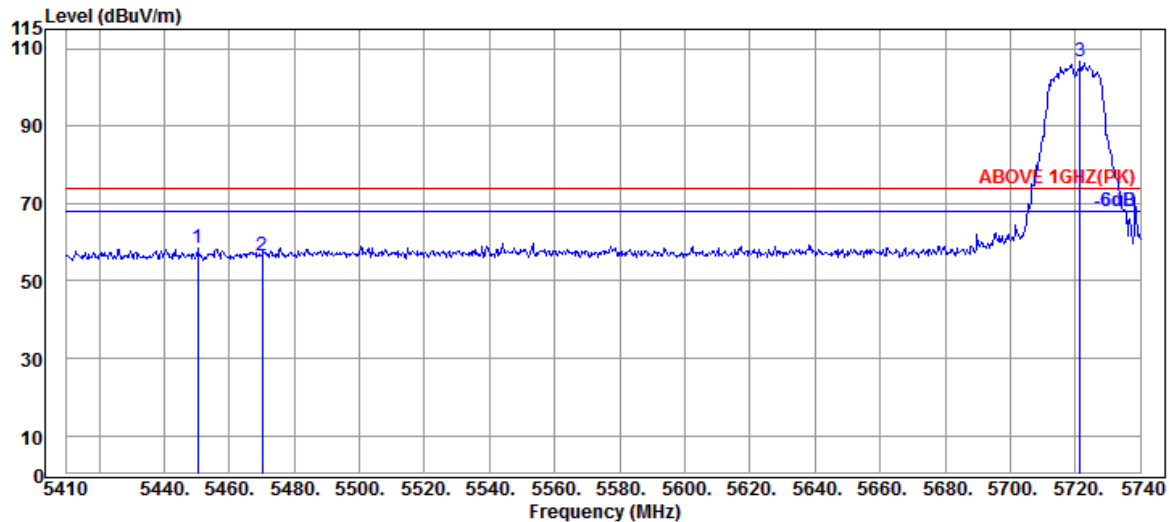

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5450.260	34.20	9.05	39.26	54.32	58.31	74.00	15.69	Peak
5470.060	34.17	9.06	39.26	52.67	56.64	74.00	17.36	Peak
@ 5721.520	33.80	9.19	39.30	103.18	106.87	---	---	Peak

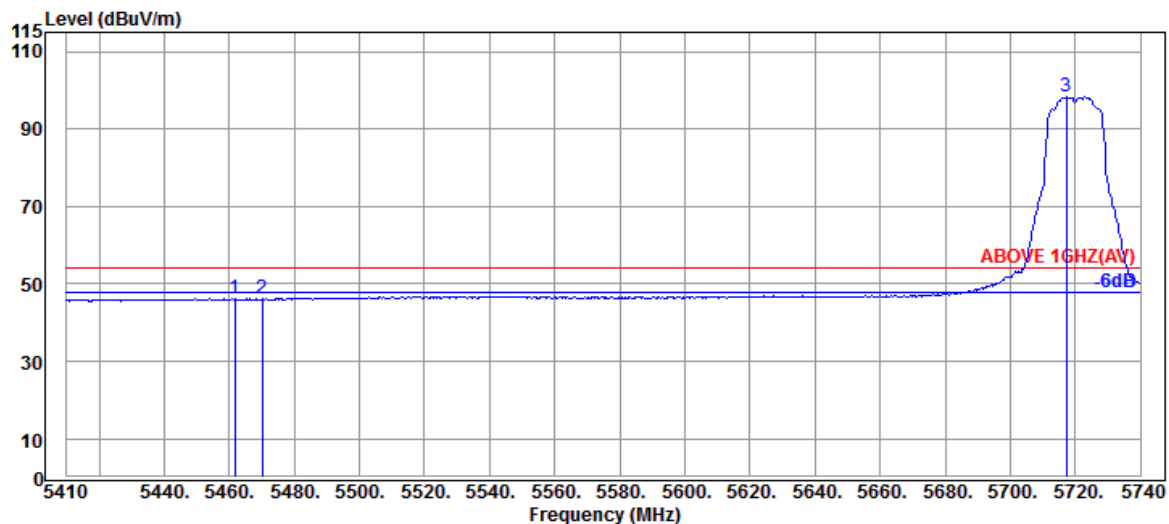

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.810	34.20	9.05	39.26	42.29	46.28	54.00	7.72	Average
5470.060	34.17	9.06	39.26	42.07	46.04	54.00	7.96	Average
@ 5717.230	33.80	9.19	39.30	94.55	98.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

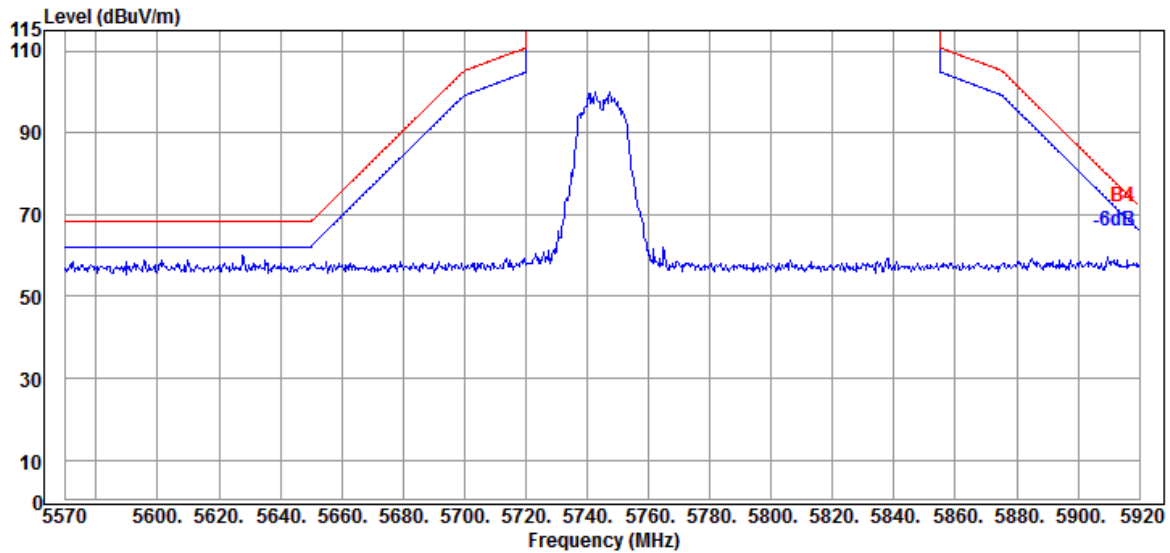

Antenna at Vertical Polarization

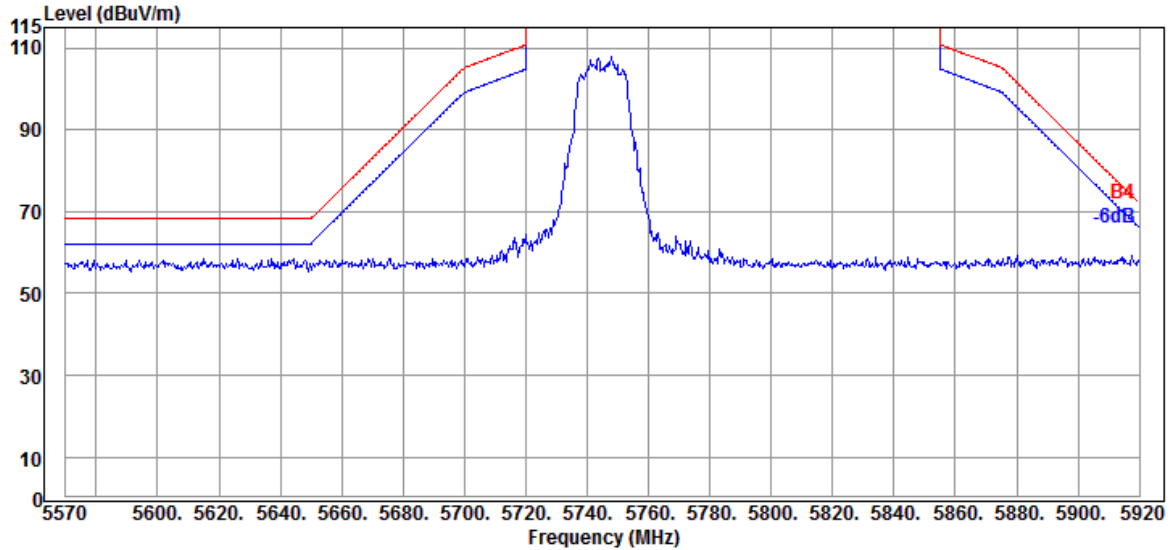


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

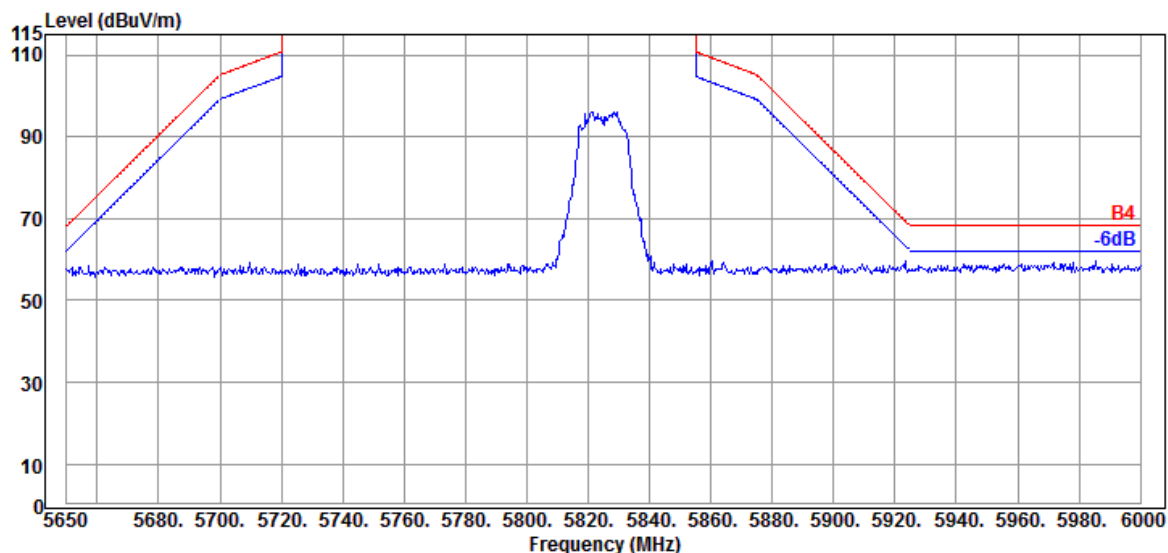

Antenna at Vertical Polarization

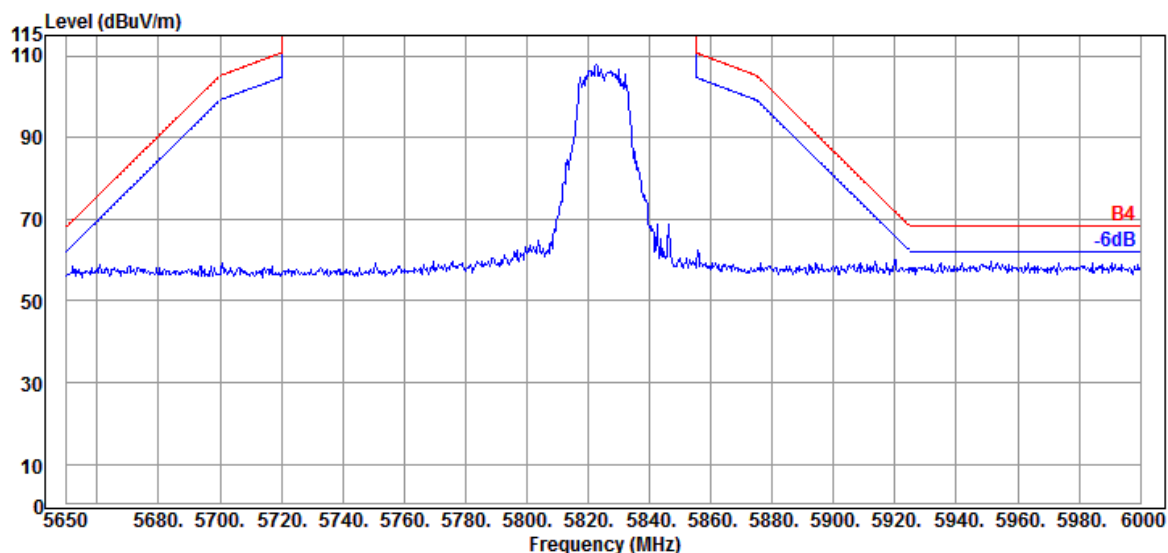

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

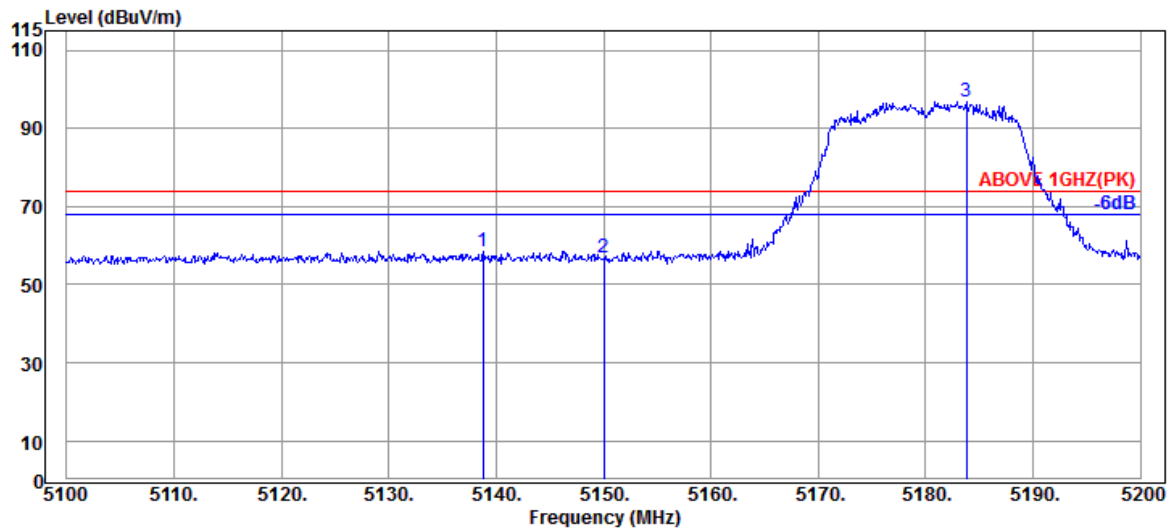

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.800	33.70	8.88	39.29	55.29	58.58	74.00	15.42	Peak
5150.000	33.70	8.88	39.29	53.66	56.95	74.00	17.05	Peak
@ 5183.800	33.70	8.90	39.28	93.48	96.80	---	---	Peak

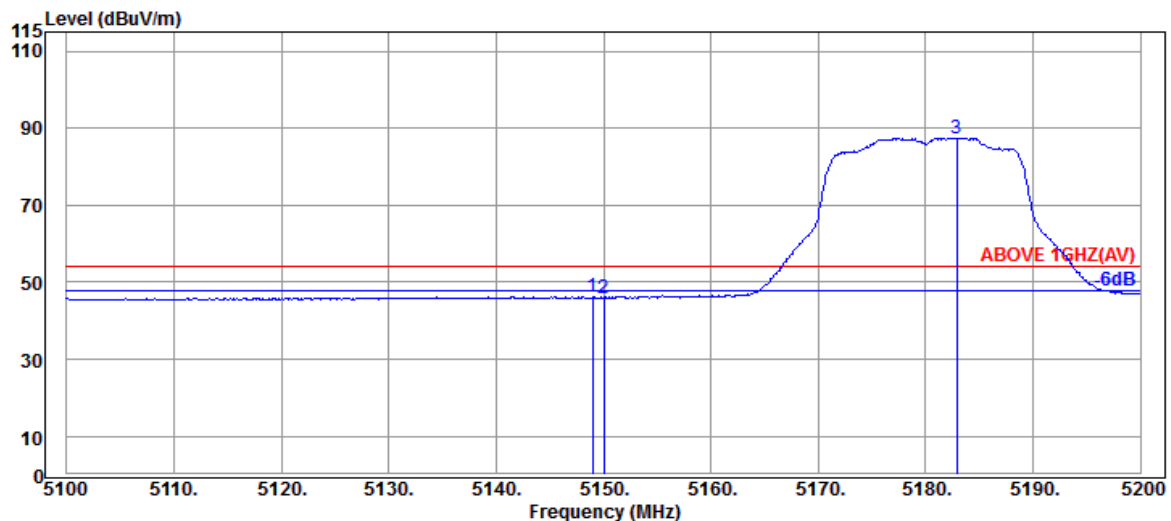


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.70	8.88	39.29	42.88	46.17	54.00	7.83	Average
5150.000	33.70	8.88	39.29	42.74	46.03	54.00	7.97	Average
@ 5182.900	33.70	8.90	39.28	84.19	87.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

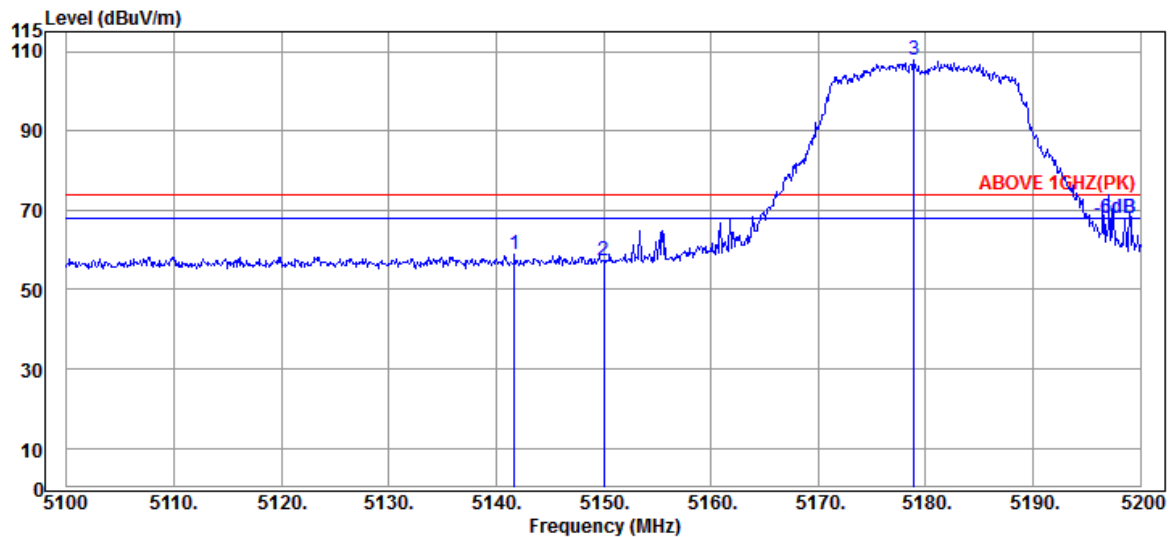

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.700	33.70	8.88	39.29	55.59	58.88	74.00	15.12	Peak
5150.000	33.70	8.88	39.29	53.83	57.12	74.00	16.88	Peak
@ 5178.900	33.70	8.90	39.28	104.71	108.03	---	---	Peak

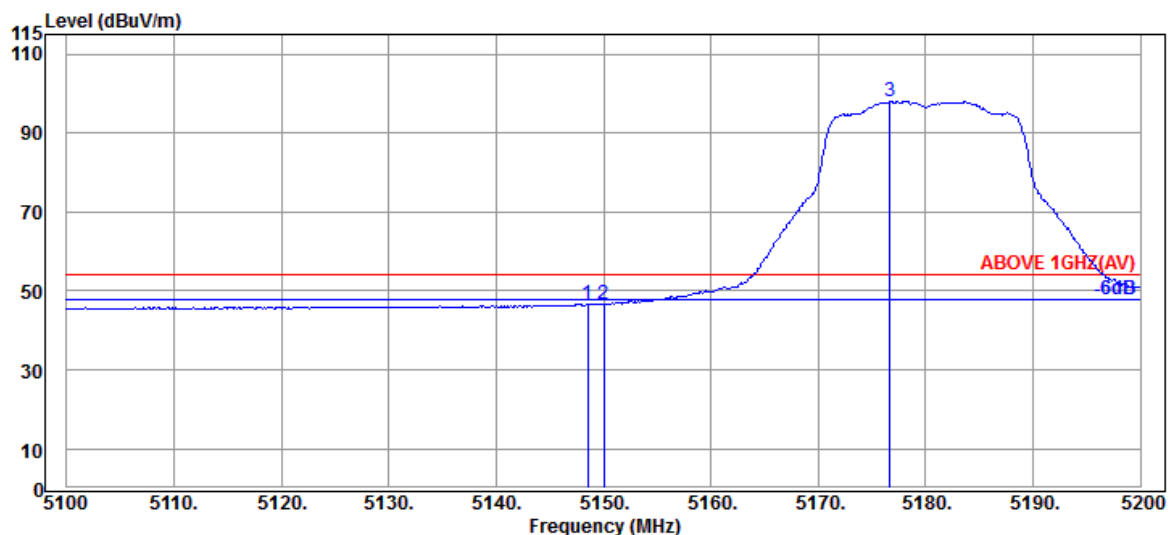

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.70	8.88	39.29	43.45	46.74	54.00	7.26	Average
5150.000	33.70	8.88	39.29	43.45	46.74	54.00	7.26	Average
@ 5176.700	33.70	8.90	39.28	94.67	97.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

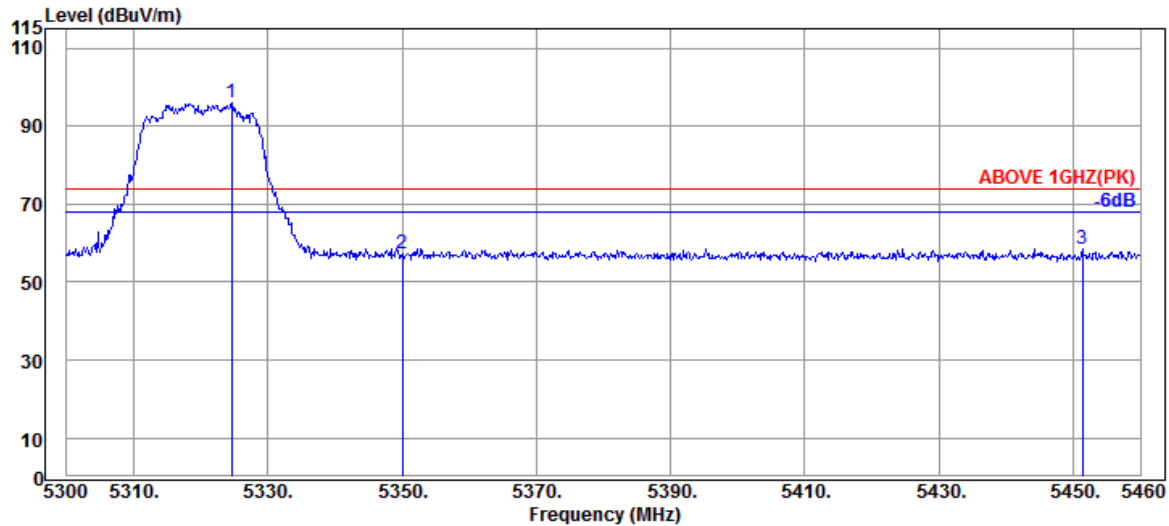

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5324.640	33.97	8.99	39.27	92.41	96.10	---	---	Peak
	5350.080	33.90	8.99	39.27	53.65	57.27	74.00	16.73	Peak
	5451.360	34.20	9.05	39.26	54.59	58.58	74.00	15.42	Peak

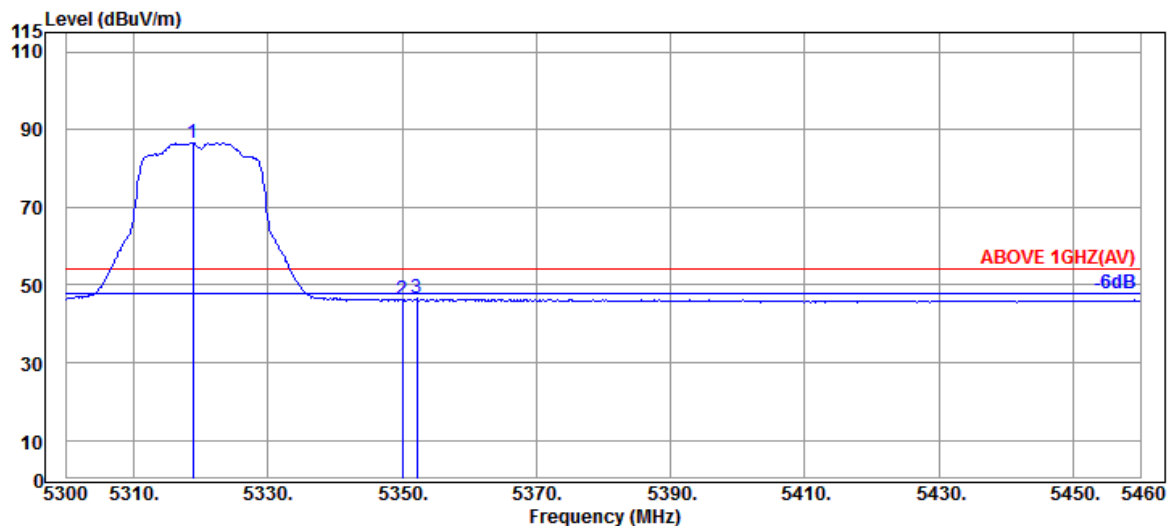


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.880	34.03	8.98	39.27	82.81	86.55	---	---	Average
	5350.080	33.90	8.99	39.27	42.54	46.16	54.00	7.84	Average
	5352.160	33.90	8.99	39.27	42.84	46.46	54.00	7.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

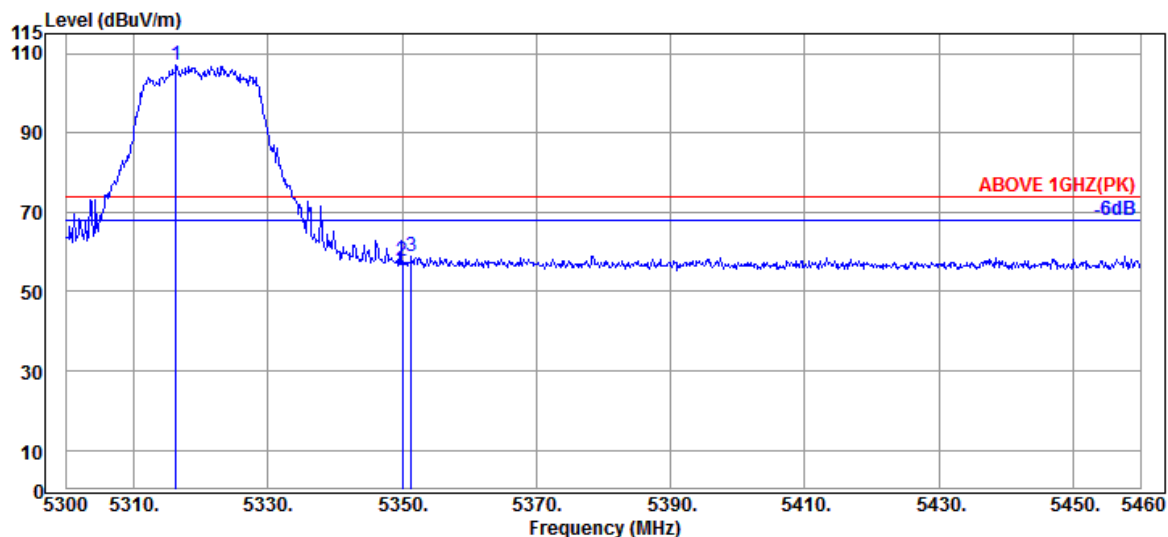

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.320	34.03	8.98	39.27	103.34	107.08	---	---	Peak
5350.080	33.90	8.99	39.27	54.25	57.87	74.00	16.13	Peak
5351.360	33.90	8.99	39.27	55.43	59.05	74.00	14.95	Peak

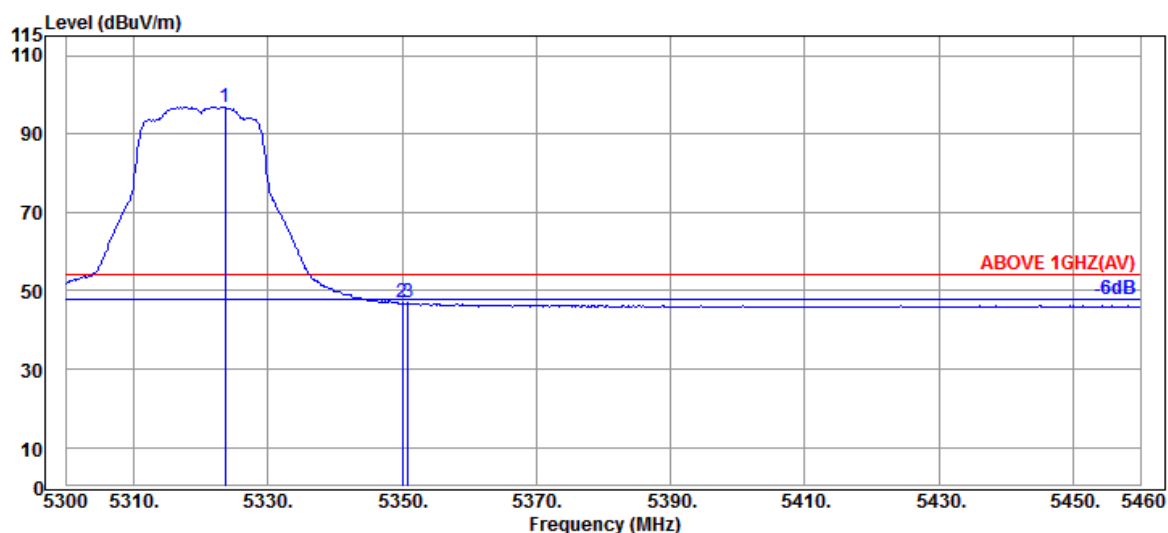

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	33.97	8.99	39.27	93.25	96.94	---	---	Average
5350.080	33.90	8.99	39.27	43.28	46.90	54.00	7.10	Average
5350.880	33.90	8.99	39.27	43.36	46.98	54.00	7.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

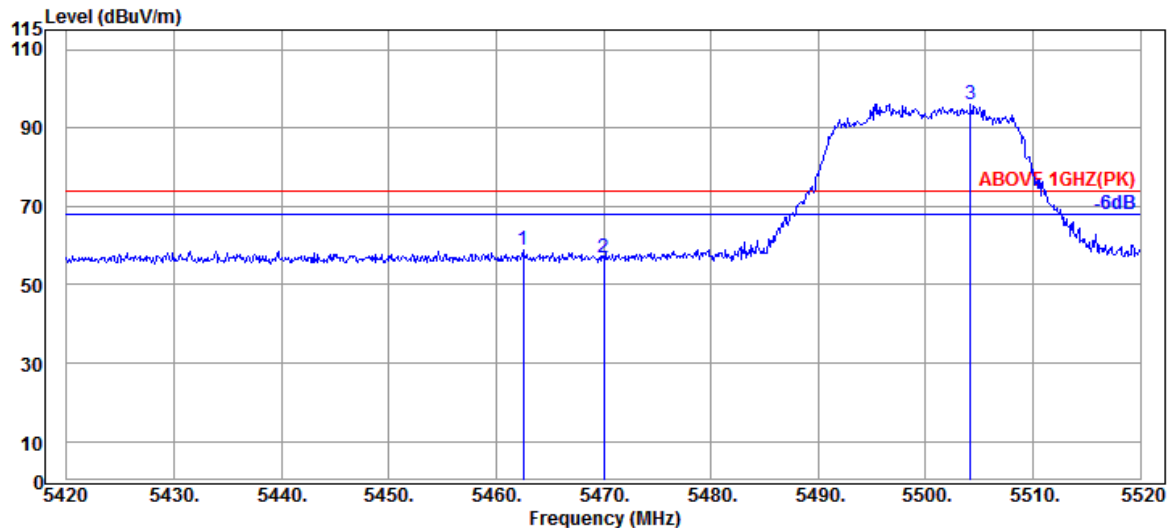

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.20	9.05	39.26	54.99	58.98	74.00	15.02	Peak
5470.000	34.17	9.06	39.26	52.95	56.92	74.00	17.08	Peak
@ 5504.200	34.10	9.08	39.26	92.21	96.13	---	---	Peak

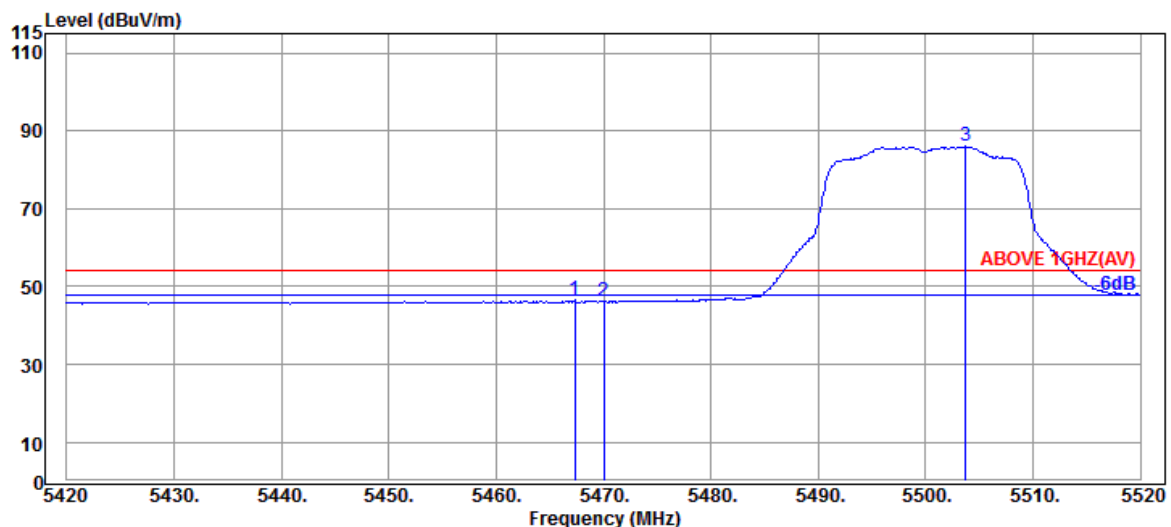

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.17	9.06	39.26	42.52	46.49	54.00	7.51	Average
5470.000	34.17	9.06	39.26	42.10	46.07	54.00	7.93	Average
@ 5503.700	34.10	9.08	39.26	82.04	85.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

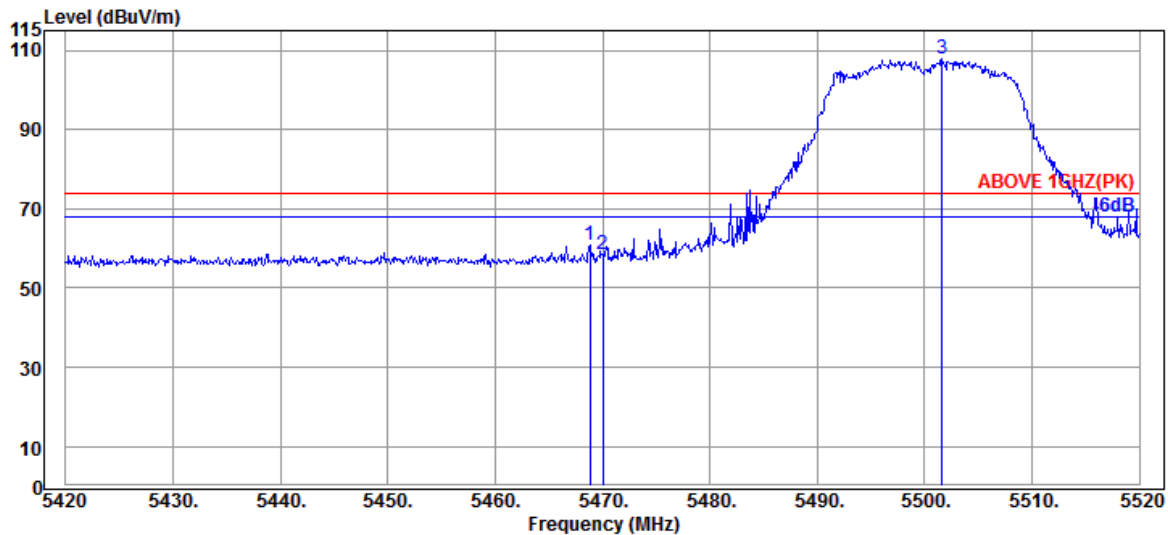

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.17	9.06	39.26	56.93	60.90	74.00	13.10	Peak
5470.000	34.17	9.06	39.26	54.37	58.34	74.00	15.66	Peak
@ 5501.600	34.10	9.08	39.26	103.89	107.81	---	---	Peak

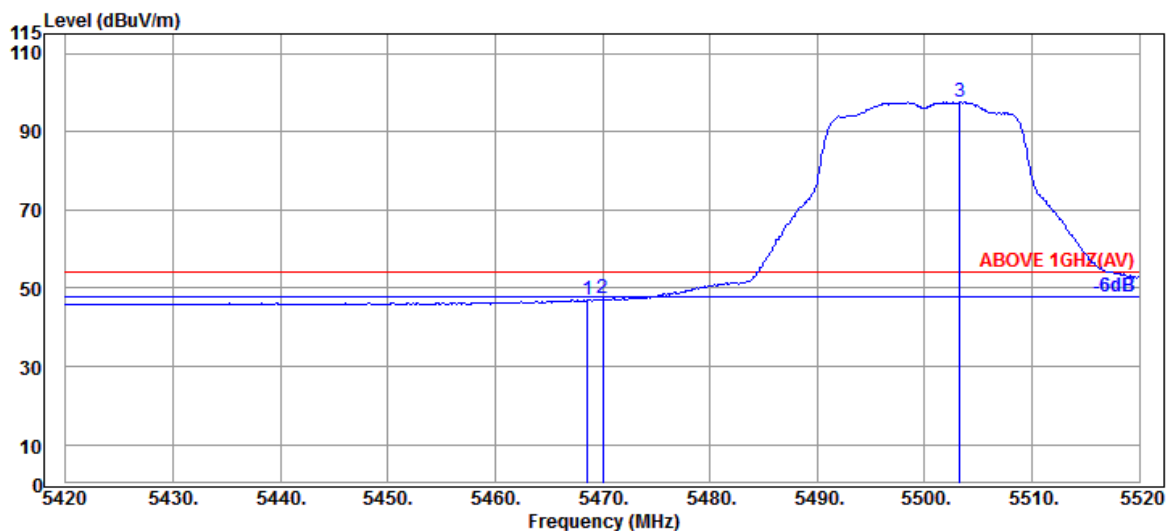


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.600	34.17	9.06	39.26	43.03	47.00	54.00	7.00	Average
5470.000	34.17	9.06	39.26	43.30	47.27	54.00	6.73	Average
@ 5503.300	34.10	9.08	39.26	93.66	97.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

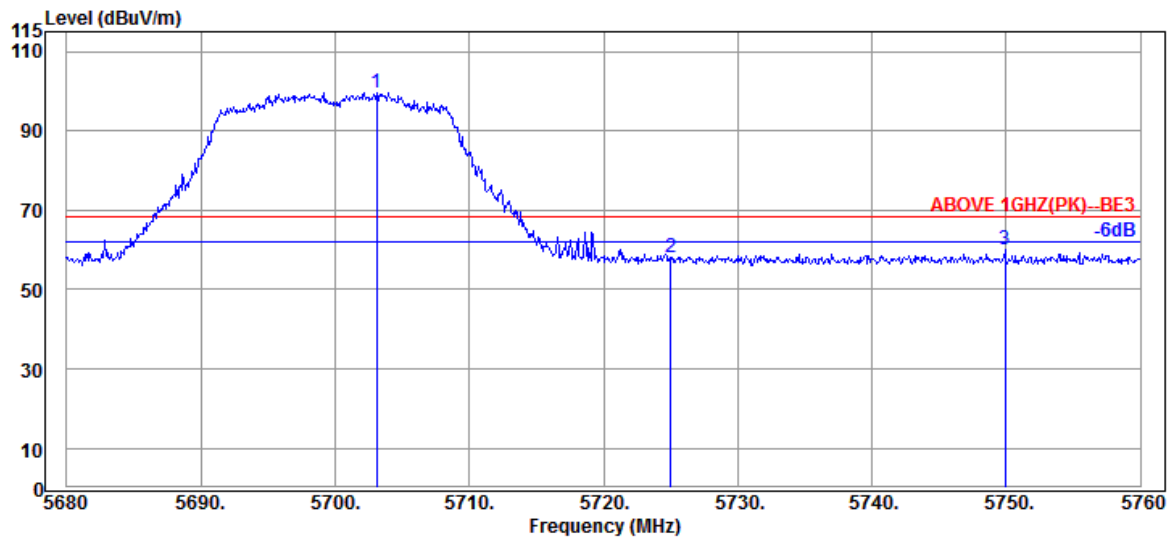

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.120	33.80	9.18	39.30	96.05	99.73	---	---	Peak
5725.040	33.80	9.20	39.30	54.39	58.09	68.20	10.11	Peak
5749.920	33.80	9.20	39.31	56.23	59.92	68.20	8.28	Peak

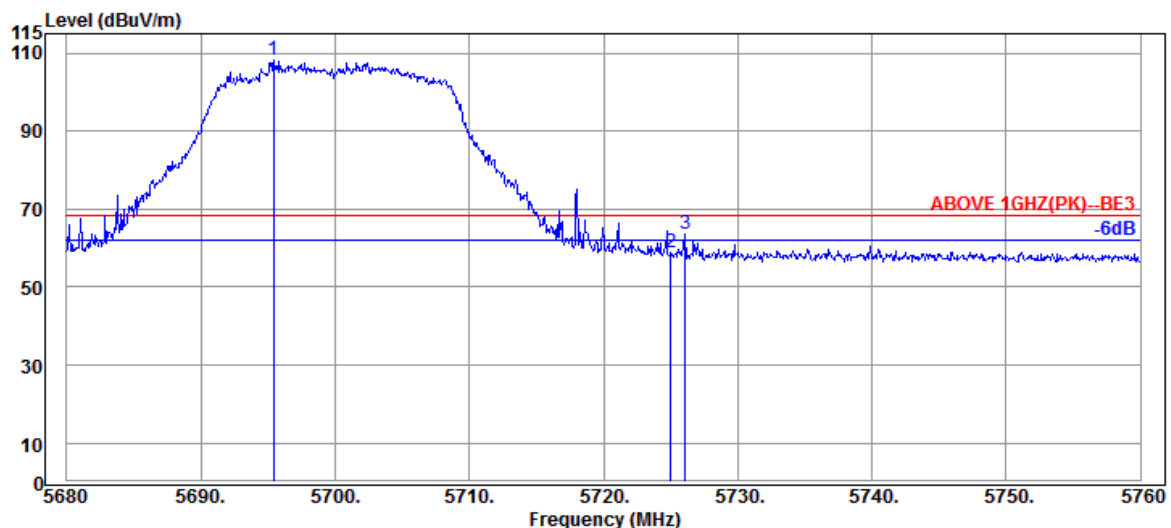

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.440	33.80	9.18	39.30	104.44	108.12	---	---	Peak
5725.040	33.80	9.20	39.30	55.10	58.80	68.20	9.40	Peak
5726.080	33.80	9.20	39.30	60.08	63.78	68.20	4.42	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

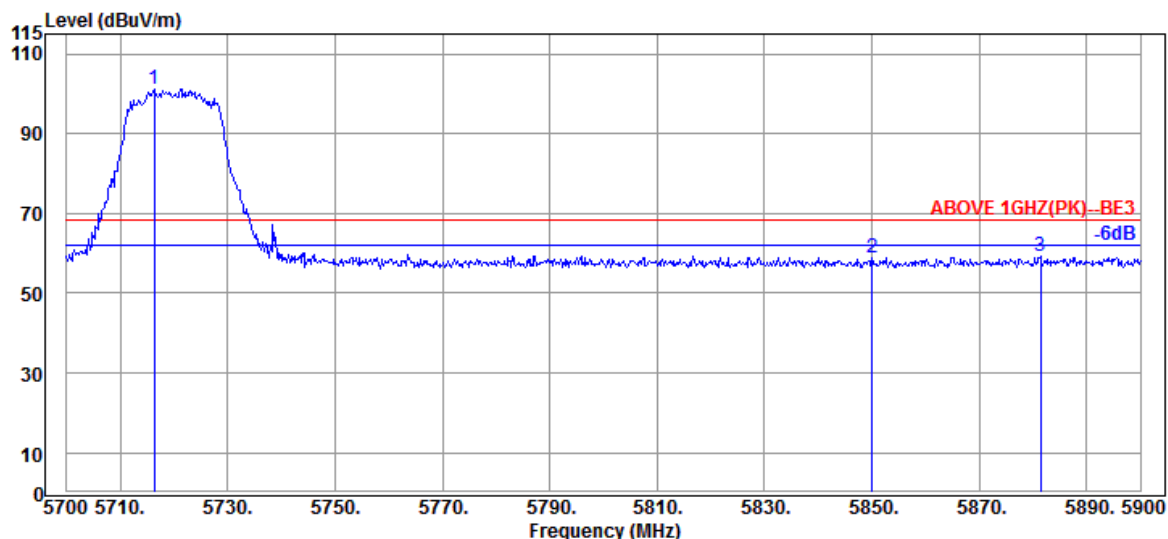

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.400	33.80	9.19	39.30	97.58	101.27	---	---	Peak
5850.000	34.10	9.25	39.33	54.70	58.72	68.20	9.48	Peak
5881.400	34.10	9.27	39.34	55.11	59.14	68.20	9.06	Peak

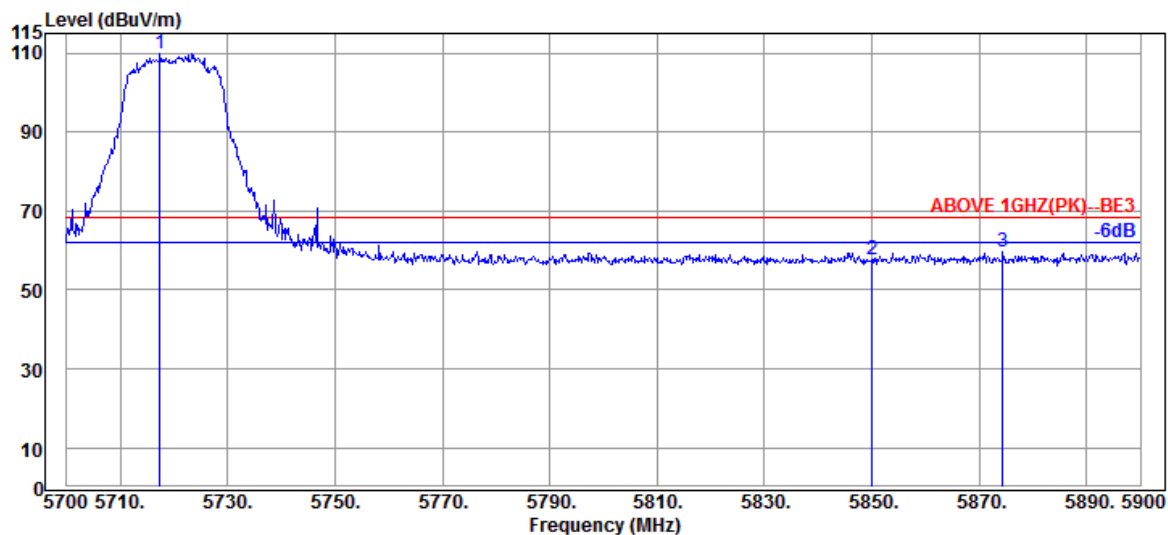

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.400	33.80	9.19	39.30	106.28	109.97	---	---	Peak
5850.000	34.10	9.25	39.33	53.66	57.68	68.20	10.52	Peak
5874.400	34.10	9.27	39.33	55.52	59.56	68.20	8.64	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2207001

Report Number: EM-F220532

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

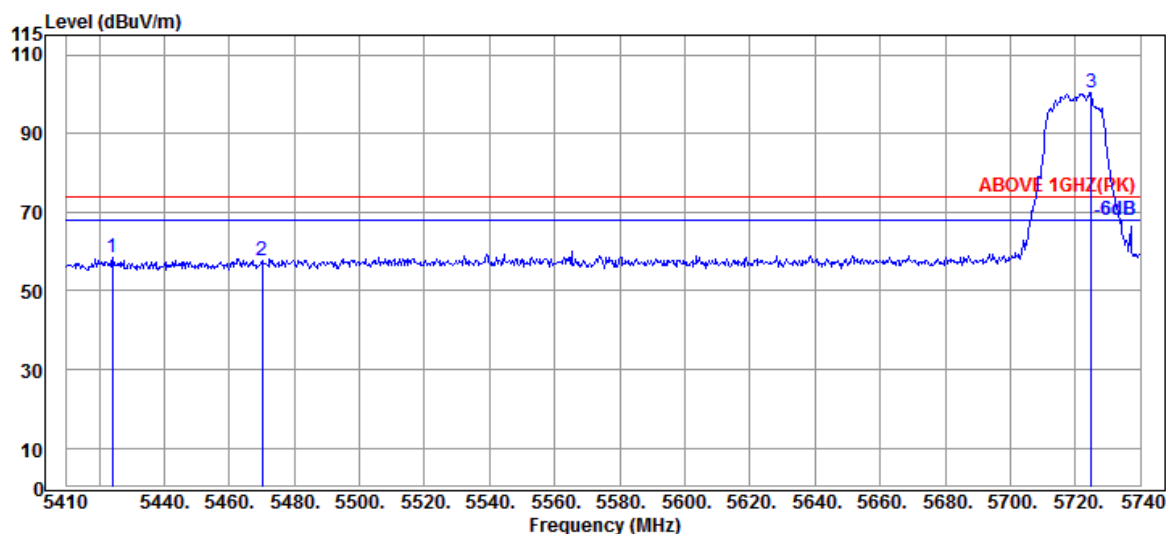

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.190	34.15	9.04	39.27	54.62	58.54	74.00	15.46	Peak
5470.060	34.17	9.06	39.26	53.57	57.54	74.00	16.46	Peak
@ 5724.820	33.80	9.20	39.30	96.59	100.29	---	---	Peak

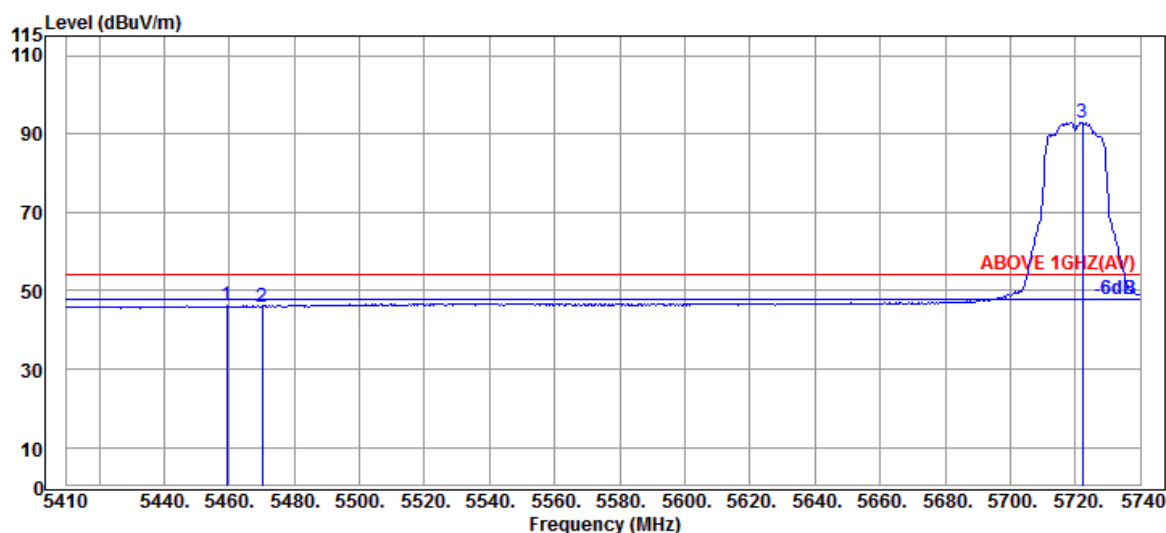

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.170	34.20	9.05	39.26	42.18	46.17	54.00	7.83	Average
5470.060	34.17	9.06	39.26	41.99	45.96	54.00	8.04	Average
@ 5722.180	33.80	9.20	39.30	89.18	92.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

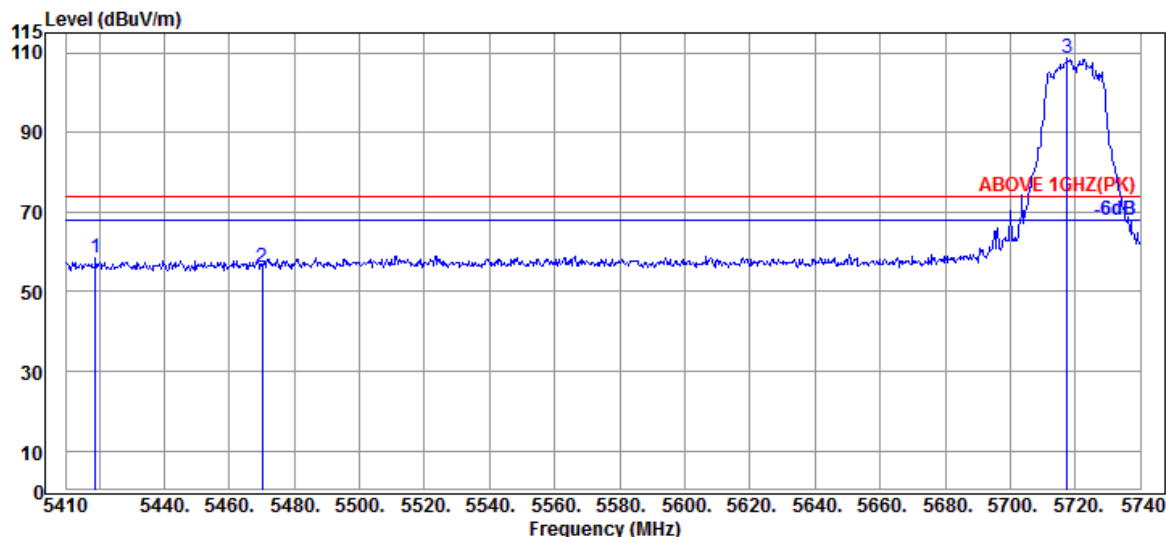

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.910	34.15	9.04	39.27	54.38	58.30	74.00	15.70	Peak
5470.060	34.17	9.06	39.26	52.03	56.00	74.00	18.00	Peak
@ 5717.560	33.80	9.19	39.30	105.00	108.69	---	---	Peak

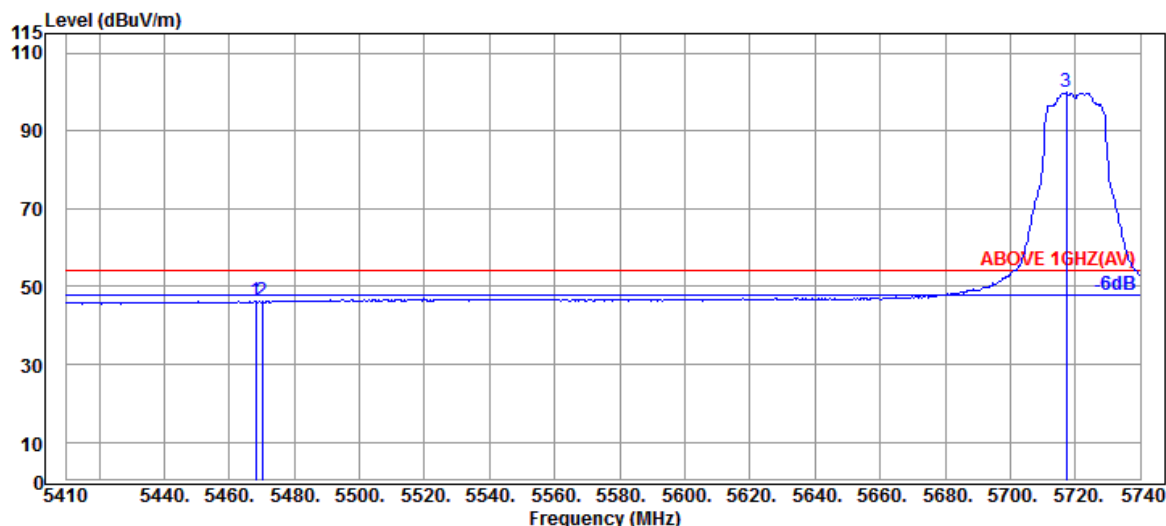

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.080	34.17	9.06	39.26	42.20	46.17	54.00	7.83	Average
5470.060	34.17	9.06	39.26	42.15	46.12	54.00	7.88	Average
@ 5717.230	33.80	9.19	39.30	96.11	99.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

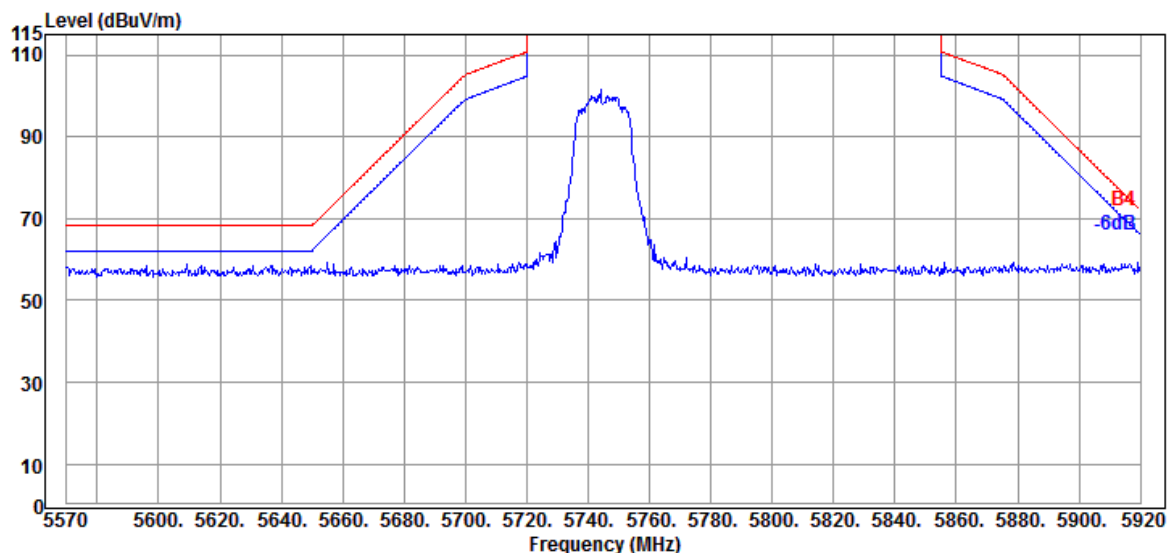

Antenna at Vertical Polarization

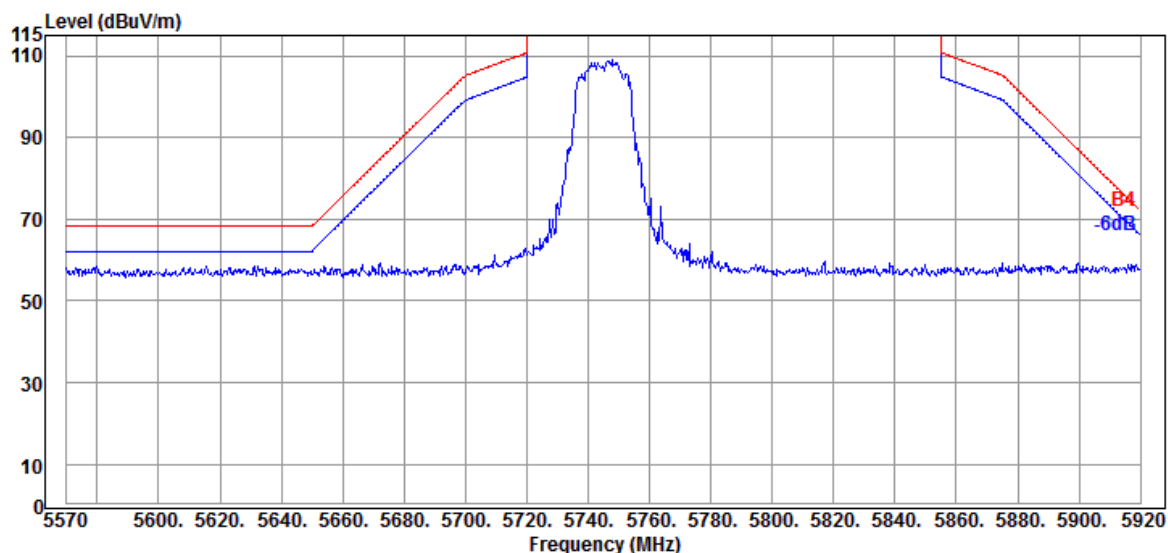


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

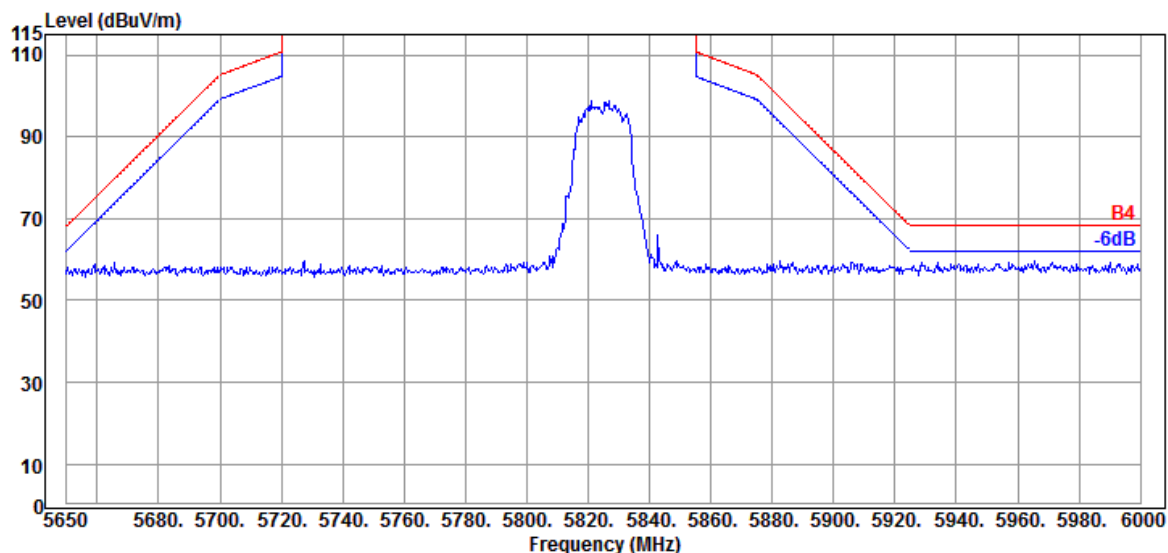

Antenna at Vertical Polarization

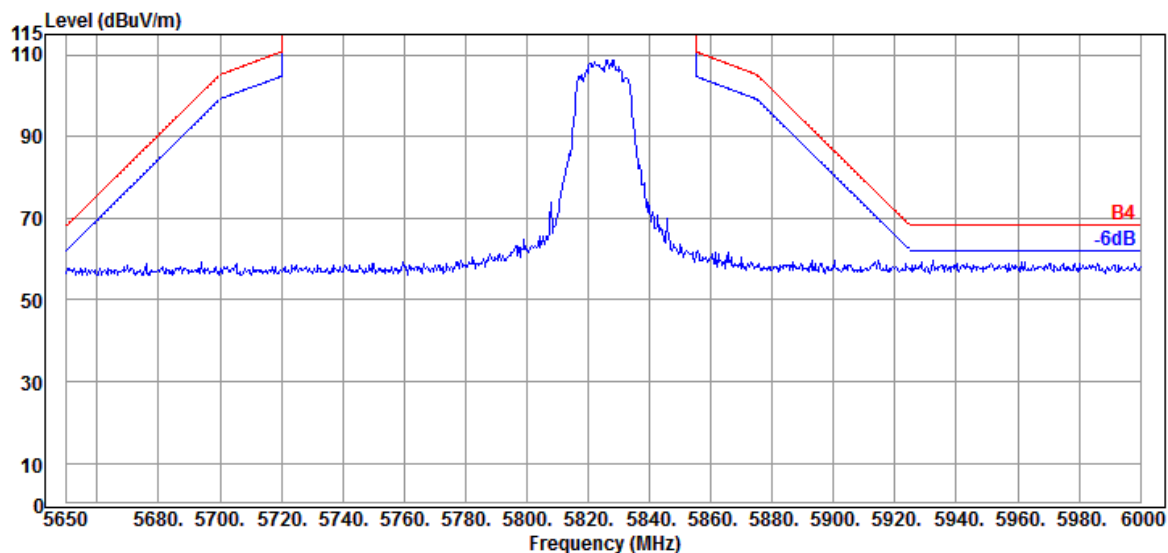


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

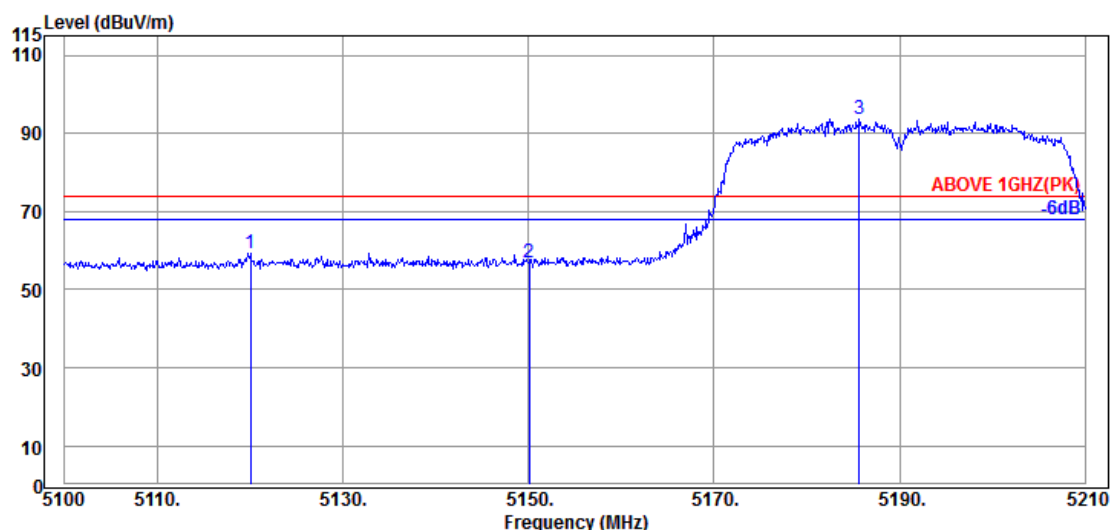

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.020	33.70	8.87	39.29	55.98	59.26	74.00	14.74	Peak
5150.050	33.70	8.88	39.29	53.75	57.04	74.00	16.96	Peak
@ 5185.690	33.70	8.90	39.28	90.54	93.86	---	---	Peak

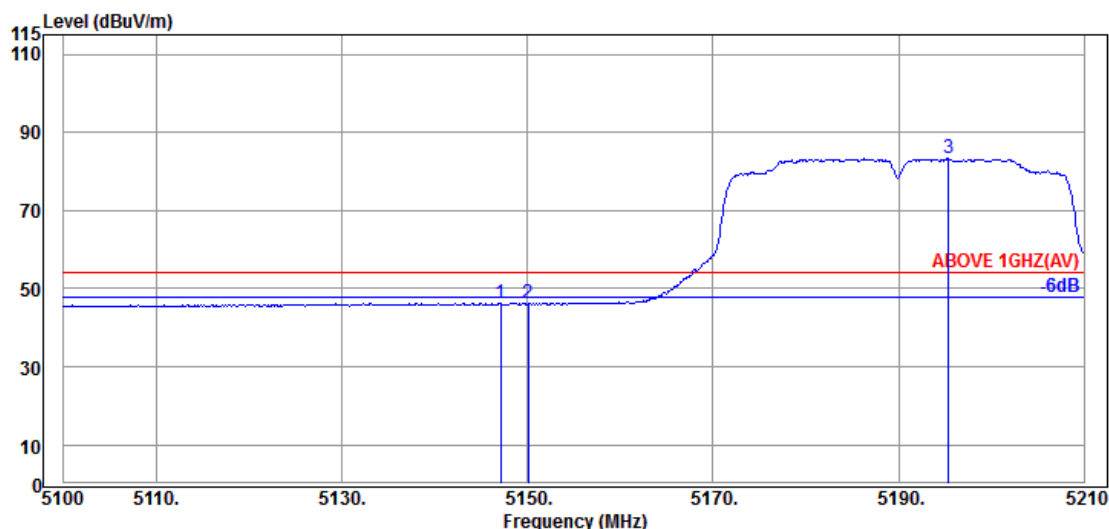


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.080	33.70	8.88	39.29	42.90	46.19	54.00	7.81	Average
5150.050	33.70	8.88	39.29	42.78	46.07	54.00	7.93	Average
@ 5195.370	33.70	8.91	39.28	79.93	83.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

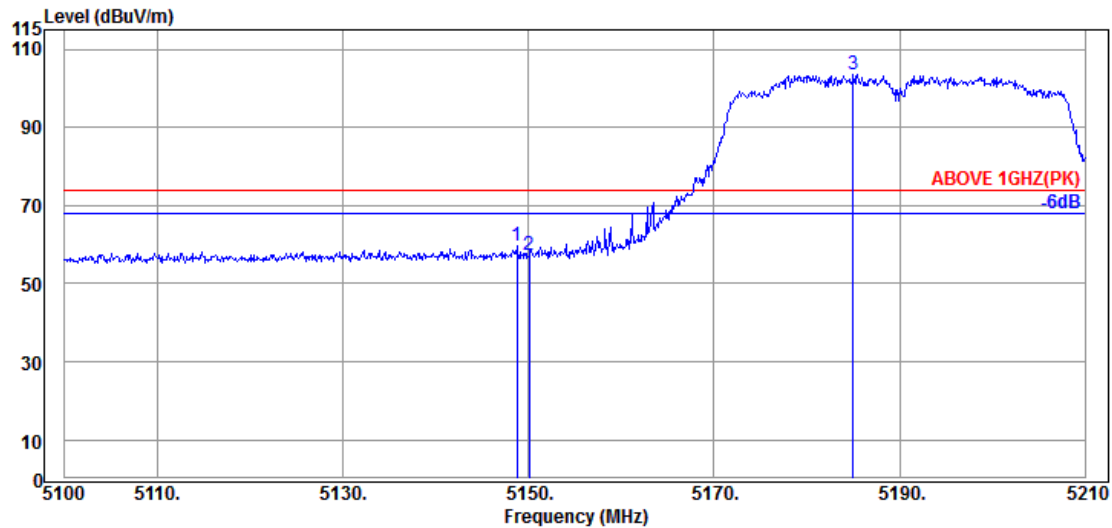

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	33.70	8.88	39.29	56.26	59.55	74.00	14.45	Peak
5150.050	33.70	8.88	39.29	53.84	57.13	74.00	16.87	Peak
@ 5185.030	33.70	8.90	39.28	100.15	103.47	---	---	Peak

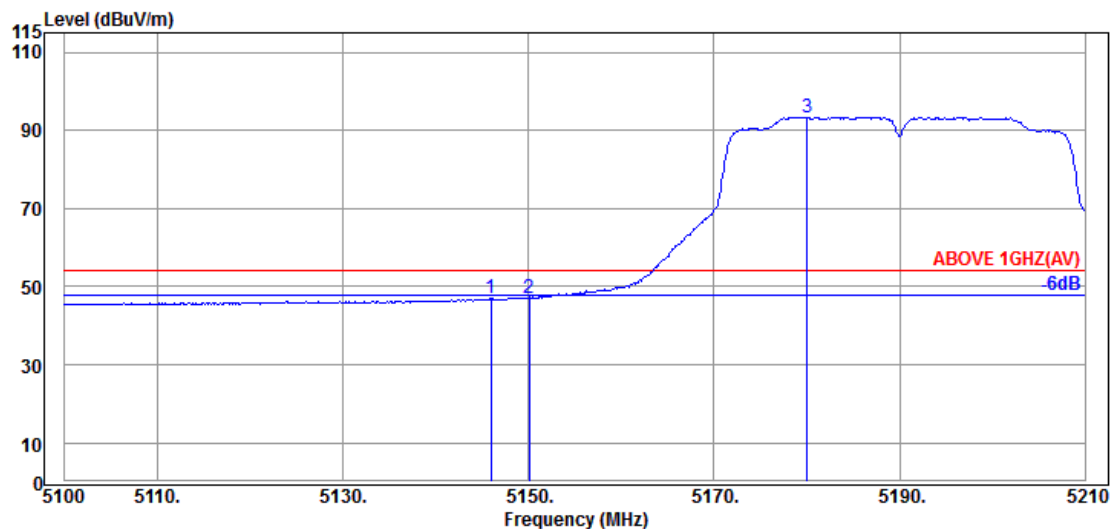


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.980	33.70	8.88	39.29	43.91	47.20	54.00	6.80	Average
5150.050	33.70	8.88	39.29	43.75	47.04	54.00	6.96	Average
@ 5180.080	33.70	8.90	39.28	90.12	93.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

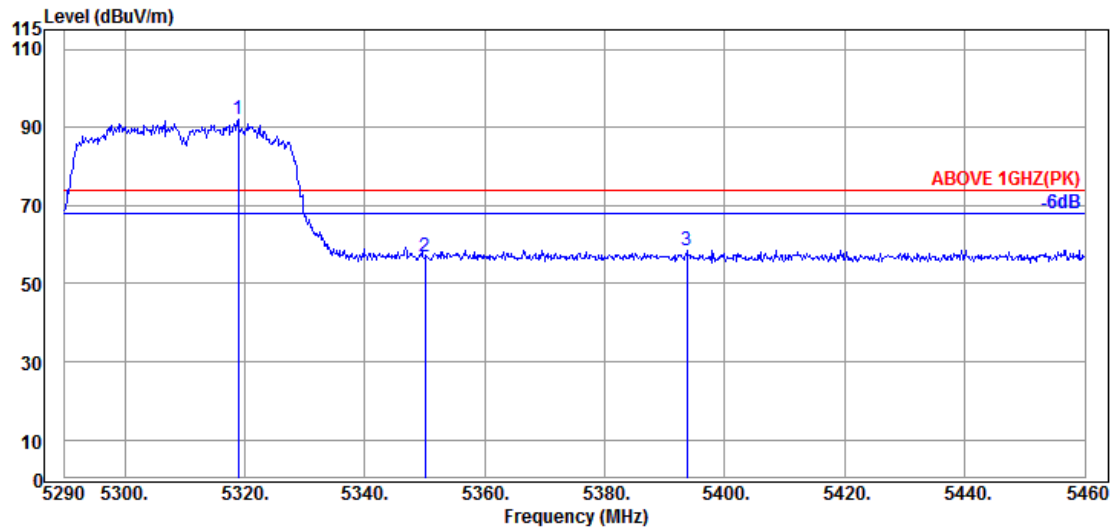

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.900	34.03	8.98	39.27	88.26	92.00	---	---	Peak
5350.010	33.90	8.99	39.27	53.39	57.01	74.00	16.99	Peak
5393.700	34.10	9.02	39.27	54.83	58.68	74.00	15.32	Peak

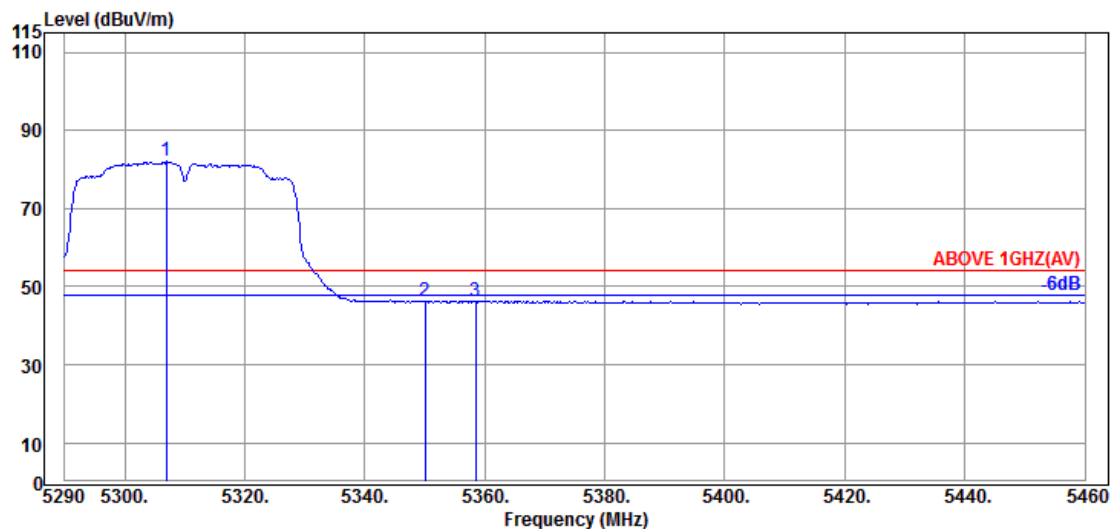

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.000	34.10	8.97	39.28	78.22	82.01	---	---	Average
5350.010	33.90	8.99	39.27	42.58	46.20	54.00	7.80	Average
5358.510	33.97	9.00	39.27	42.68	46.38	54.00	7.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

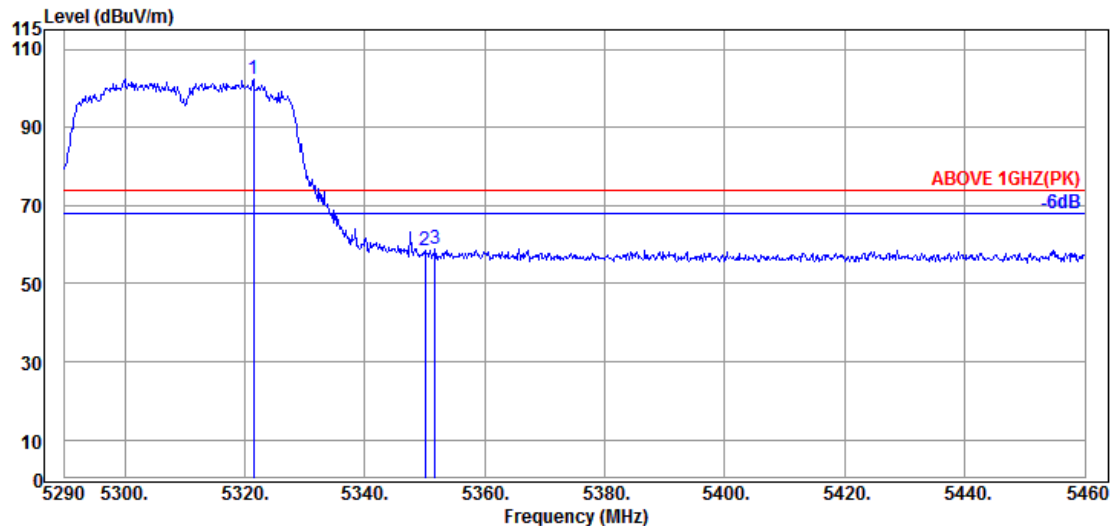

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.450	34.03	8.98	39.27	98.81	102.55	---	---	Peak
5350.010	33.90	8.99	39.27	54.77	58.39	74.00	15.61	Peak
5351.710	33.90	8.99	39.27	55.44	59.06	74.00	14.94	Peak

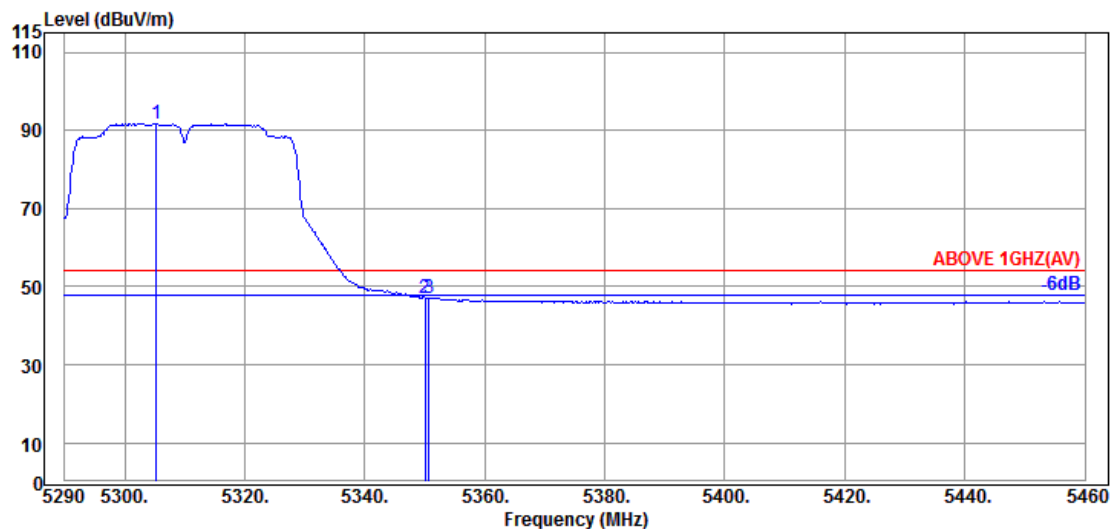

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.300	34.10	8.97	39.28	87.92	91.71	---	---	Average
5350.010	33.90	8.99	39.27	43.46	47.08	54.00	6.92	Average
5350.690	33.90	8.99	39.27	43.54	47.16	54.00	6.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

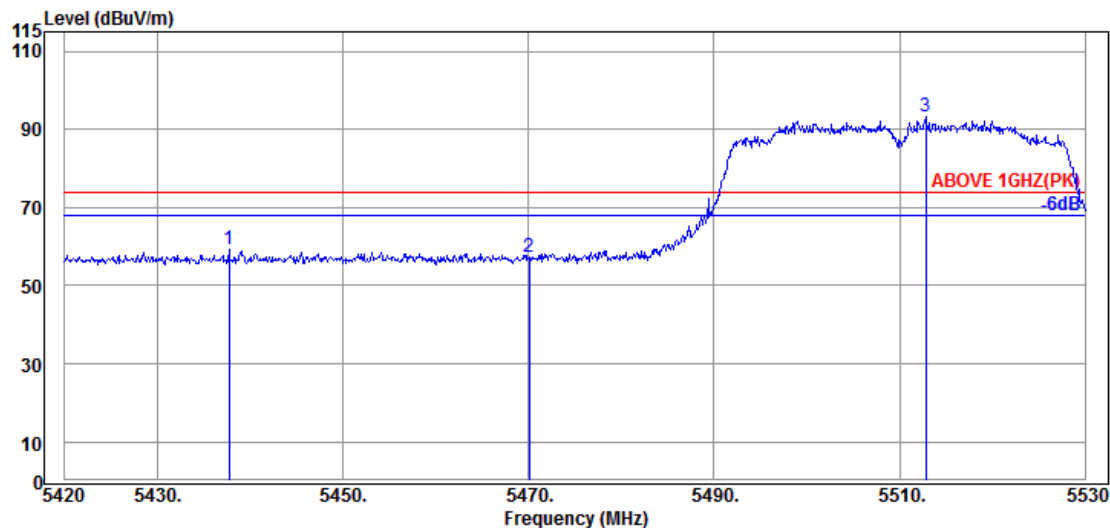

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.710	34.17	9.04	39.26	55.27	59.22	74.00	14.78	Peak
5470.050	34.17	9.06	39.26	53.40	57.37	74.00	16.63	Peak
@ 5512.840	34.10	9.09	39.26	89.49	93.42	---	---	Peak

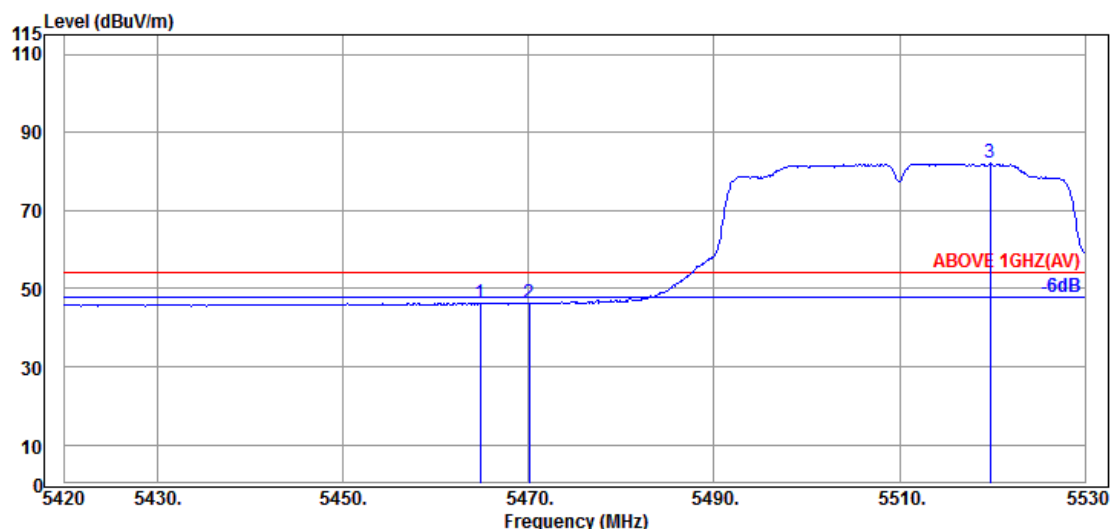


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.770	34.17	9.06	39.26	42.39	46.36	54.00	7.64	Average
5470.050	34.17	9.06	39.26	42.26	46.23	54.00	7.77	Average
@ 5519.770	34.10	9.09	39.26	78.15	82.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

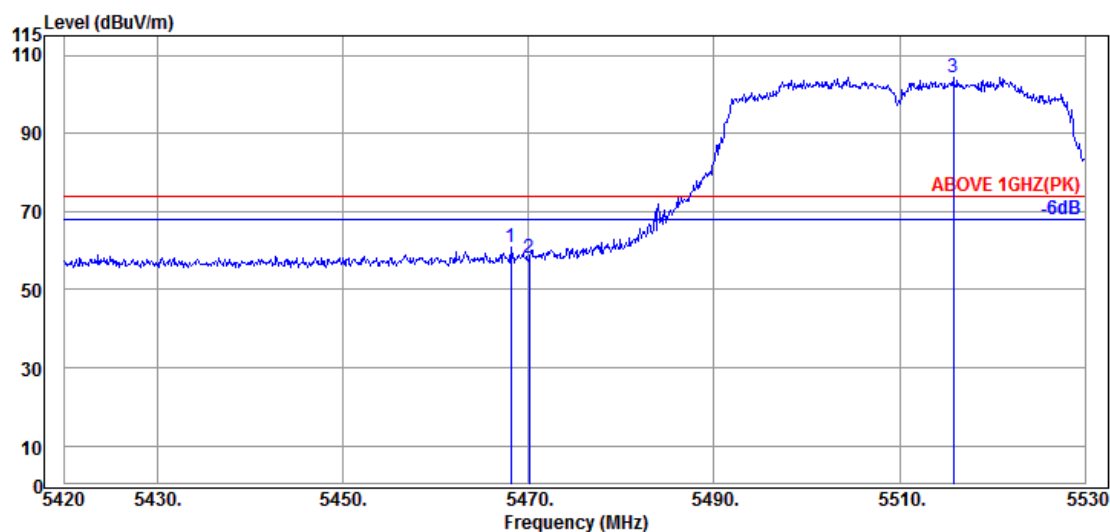

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.070	34.17	9.06	39.26	57.03	61.00	74.00	13.00	Peak
5470.050	34.17	9.06	39.26	54.06	58.03	74.00	15.97	Peak
@ 5515.810	34.10	9.09	39.26	100.33	104.26	---	---	Peak

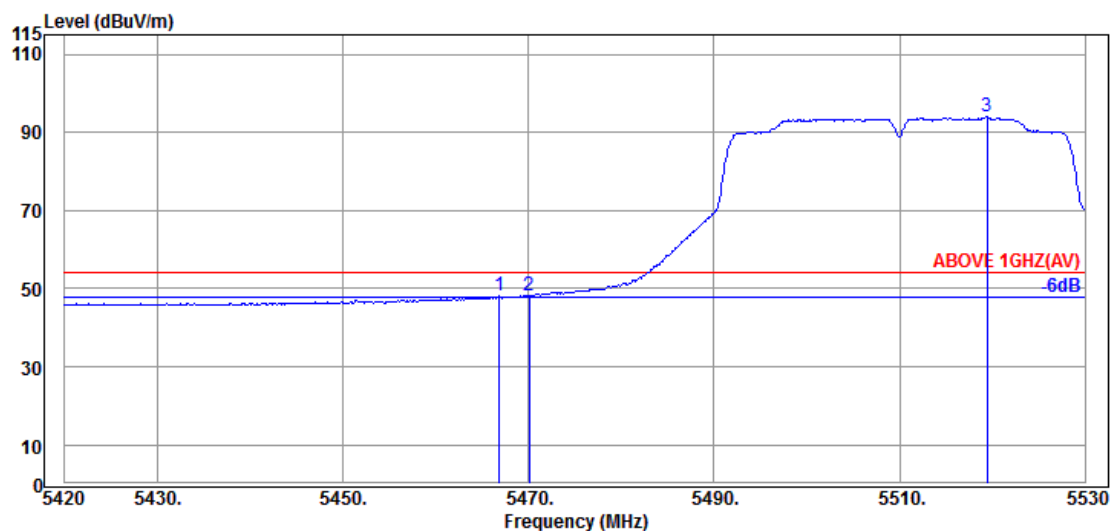

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.860	34.17	9.06	39.26	44.08	48.05	54.00	5.95	Average
5470.050	34.17	9.06	39.26	44.23	48.20	54.00	5.80	Average
@ 5519.440	34.10	9.09	39.26	90.05	93.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

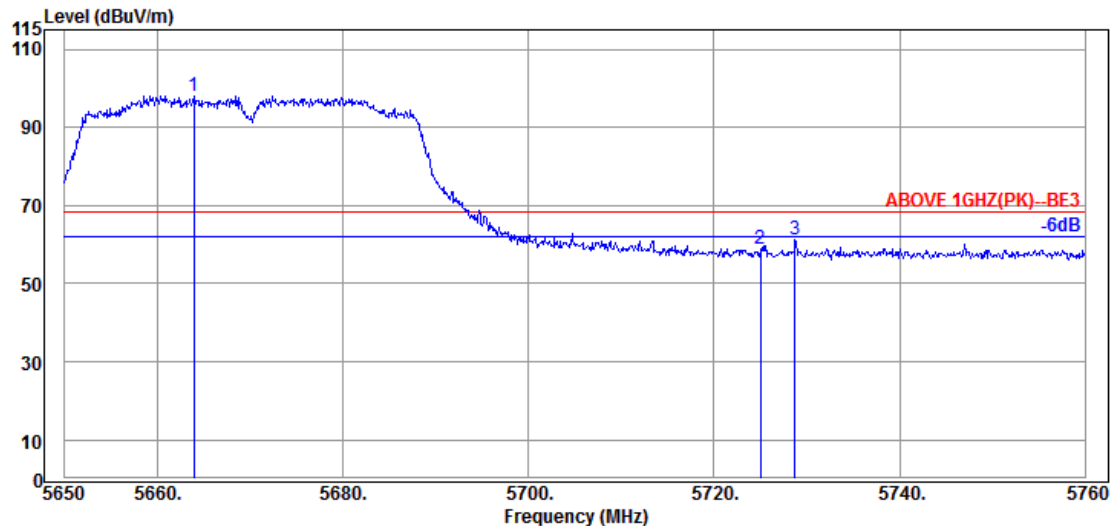

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5663.970	33.93	9.16	39.29	94.31	98.11	---	---	Peak
5725.020	33.80	9.20	39.30	55.04	58.74	68.20	9.46	Peak
5728.760	33.80	9.20	39.31	57.46	61.15	68.20	7.05	Peak

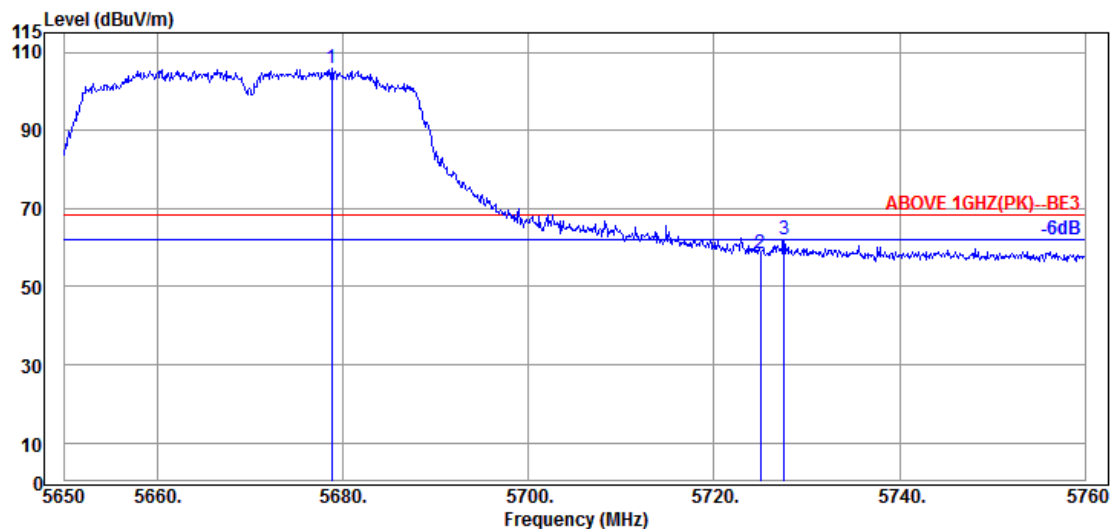

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.820	33.87	9.17	39.30	102.25	105.99	---	---	Peak
5725.020	33.80	9.20	39.30	54.76	58.46	68.20	9.74	Peak
5727.550	33.80	9.20	39.31	58.23	61.92	68.20	6.28	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

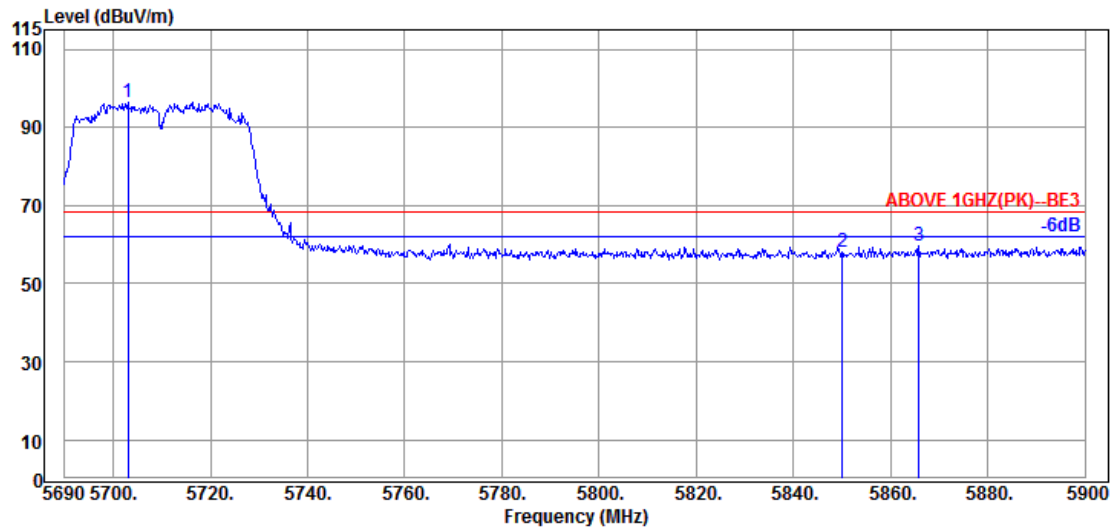

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.020	33.80	9.18	39.30	92.80	96.48	---	---	Peak
5850.020	34.10	9.25	39.33	53.93	57.95	68.20	10.25	Peak
5865.770	34.10	9.26	39.33	55.81	59.84	68.20	8.36	Peak

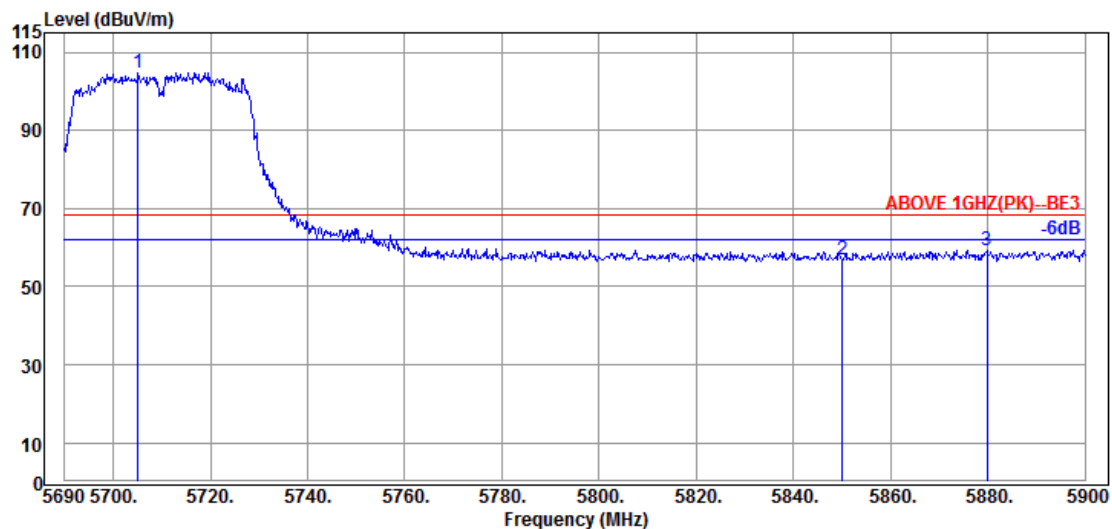


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.120	33.80	9.18	39.30	101.04	104.72	---	---	Peak
5850.020	34.10	9.25	39.33	52.71	56.73	68.20	11.47	Peak
5879.840	34.10	9.27	39.34	55.35	59.38	68.20	8.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

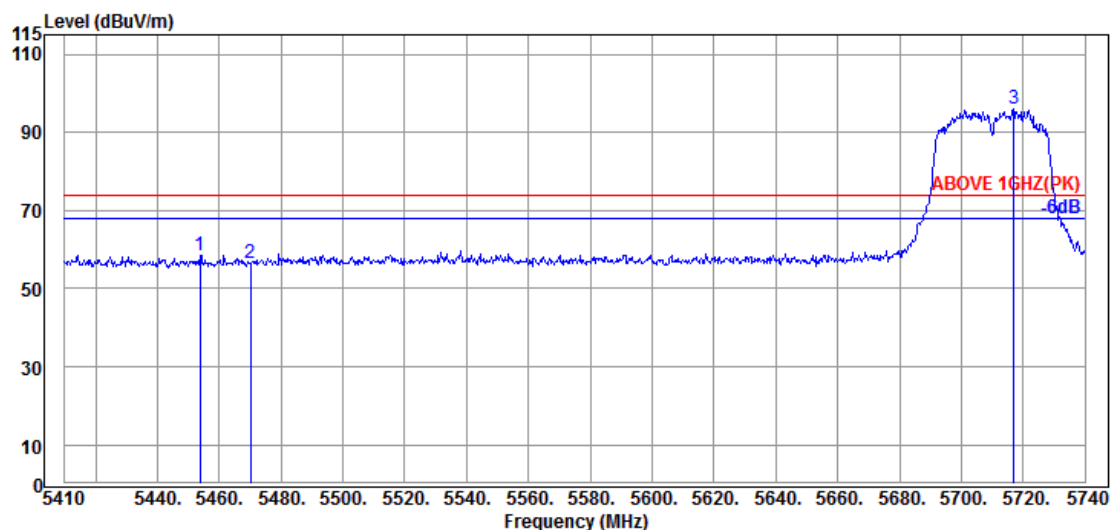

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.890	34.20	9.05	39.26	54.63	58.62	74.00	15.38	Peak
5470.060	34.17	9.06	39.26	52.37	56.34	74.00	17.66	Peak
@ 5716.900	33.80	9.19	39.30	92.23	95.92	---	---	Peak

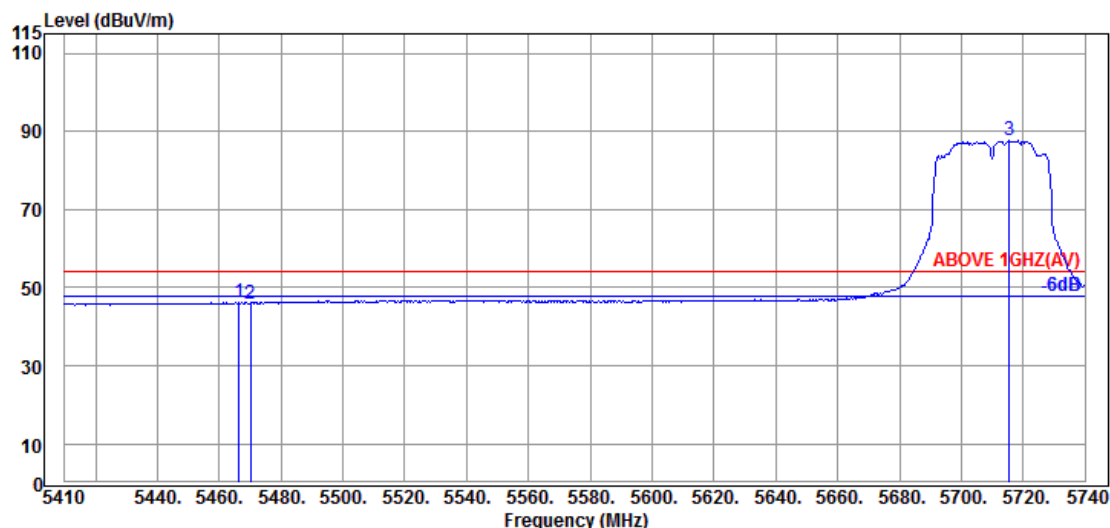

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.17	9.06	39.26	42.17	46.14	54.00	7.86	Average
5470.060	34.17	9.06	39.26	41.99	45.96	54.00	8.04	Average
@ 5715.580	33.80	9.19	39.30	83.85	87.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

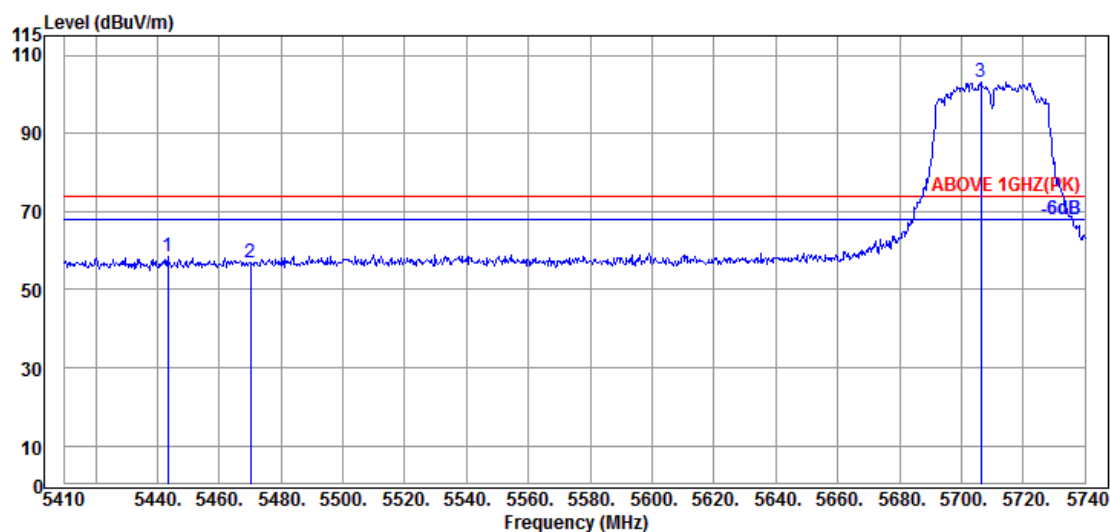

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.330	34.17	9.04	39.26	54.62	58.57	74.00	15.43	Peak
5470.060	34.17	9.06	39.26	52.97	56.94	74.00	17.06	Peak
@ 5706.340	33.80	9.19	39.30	99.46	103.15	---	---	Peak

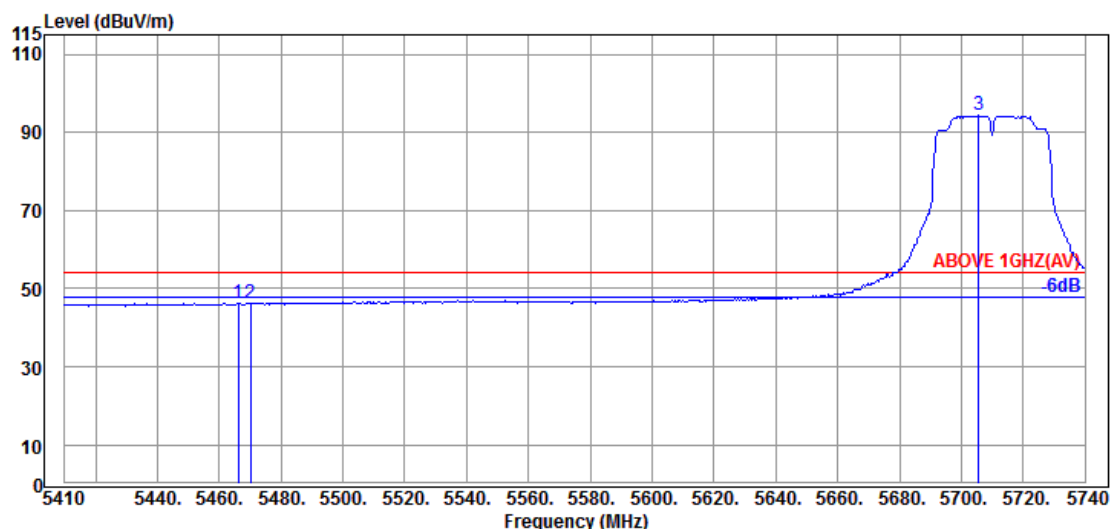

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	9.06	39.26	42.20	46.17	54.00	7.83	Average
5470.060	34.17	9.06	39.26	42.08	46.05	54.00	7.95	Average
@ 5705.680	33.80	9.19	39.30	90.60	94.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

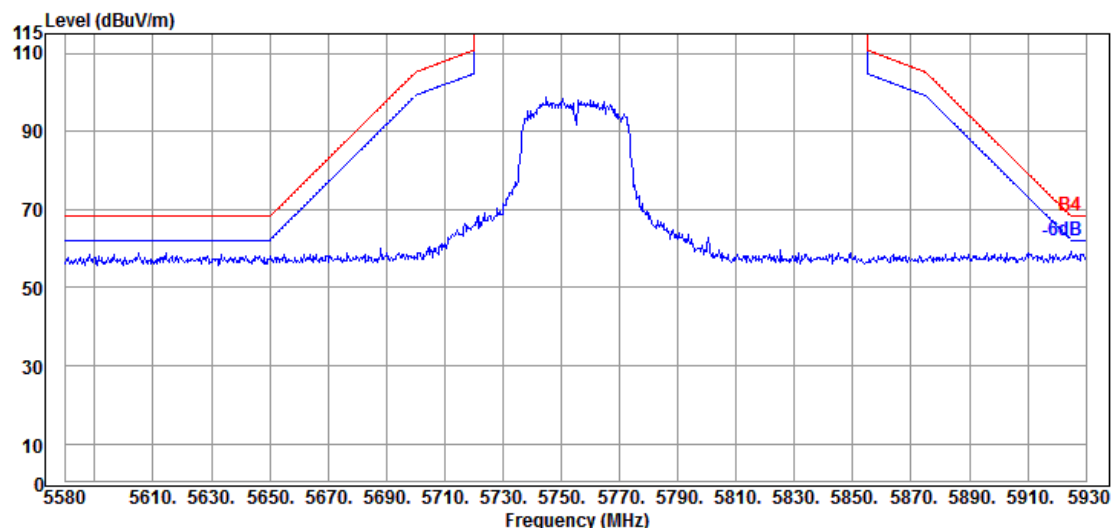

Antenna at Vertical Polarization

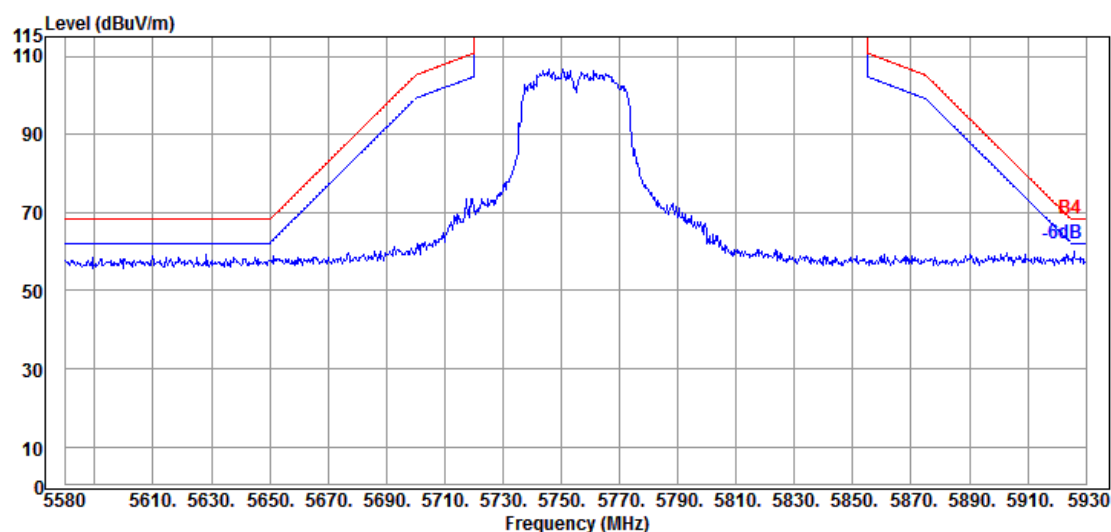


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

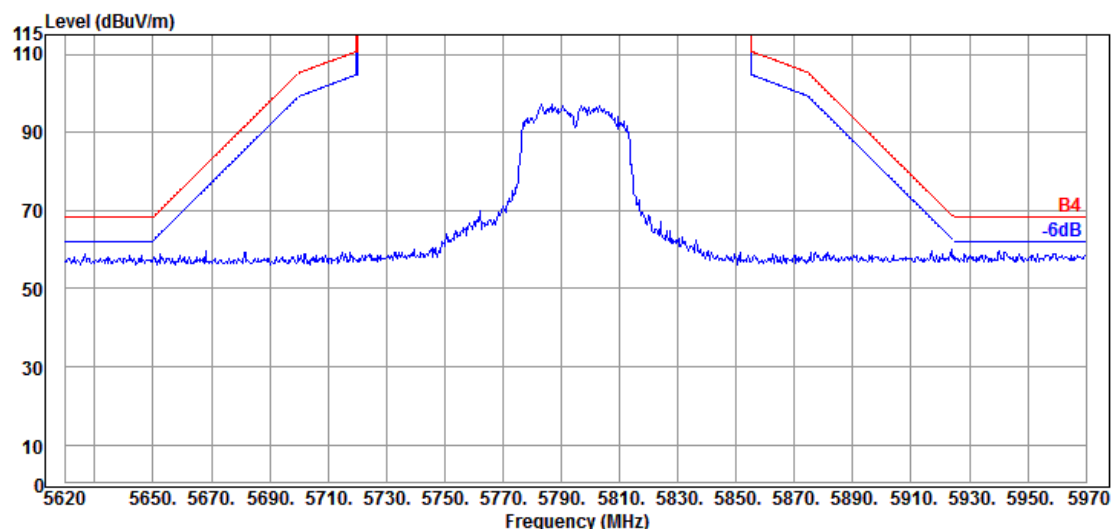

Antenna at Vertical Polarization

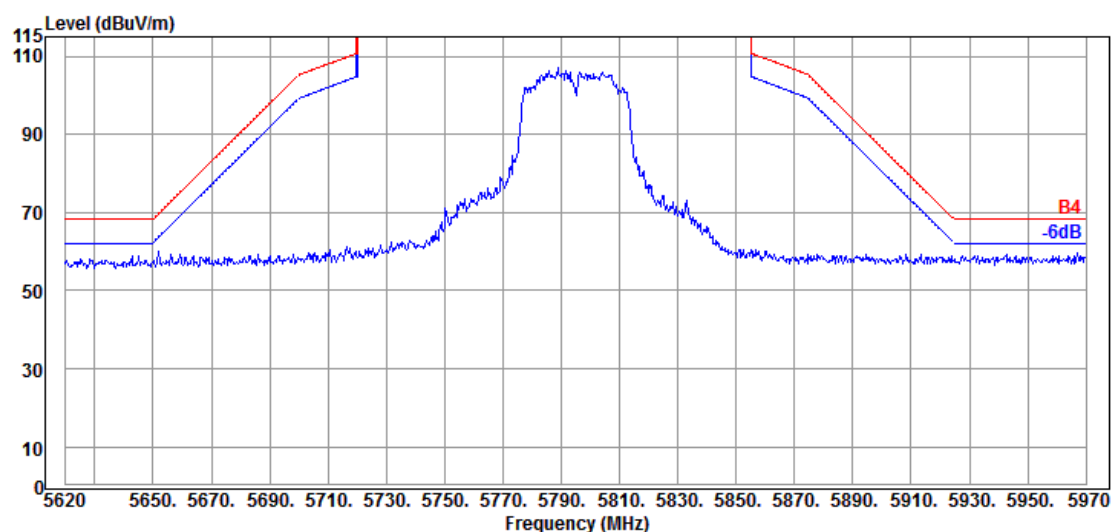


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

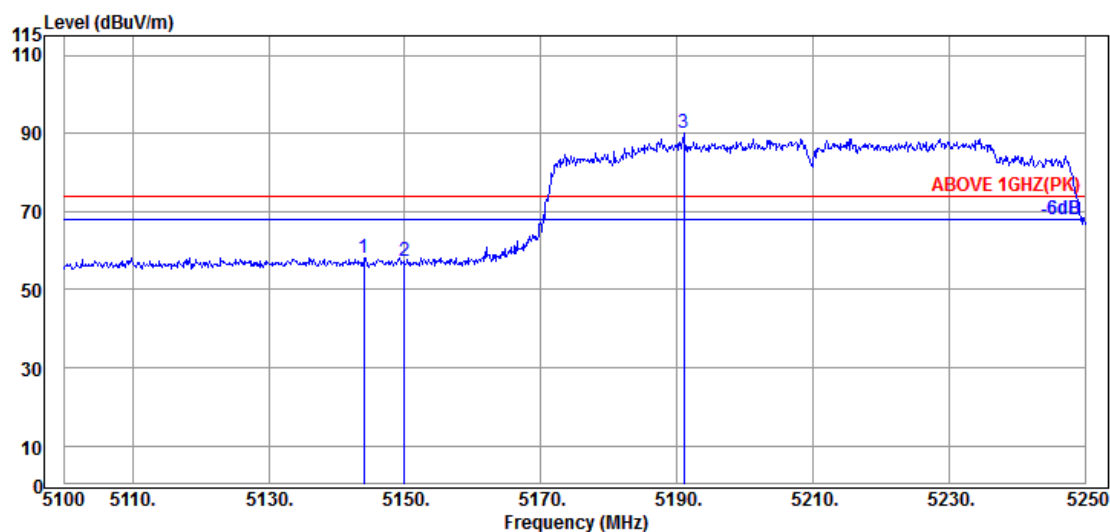

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.950	33.70	8.88	39.29	54.91	58.20	74.00	15.80	Peak
5149.950	33.70	8.88	39.29	53.94	57.23	74.00	16.77	Peak
@ 5191.050	33.70	8.91	39.28	86.86	90.19	---	---	Peak

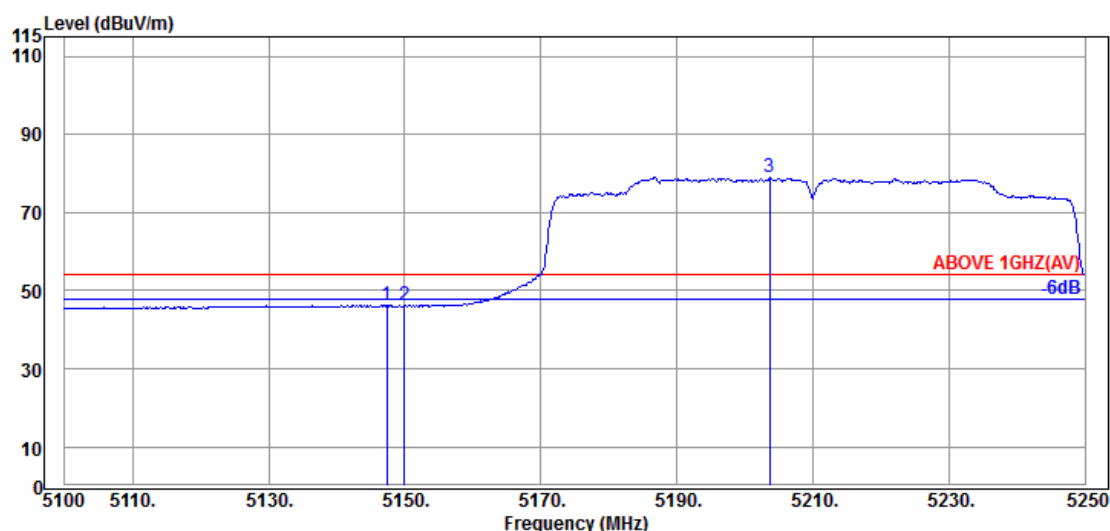


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.70	8.88	39.29	42.90	46.19	54.00	7.81	Average
5149.950	33.70	8.88	39.29	42.79	46.08	54.00	7.92	Average
@ 5203.650	33.72	8.92	39.28	75.61	78.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

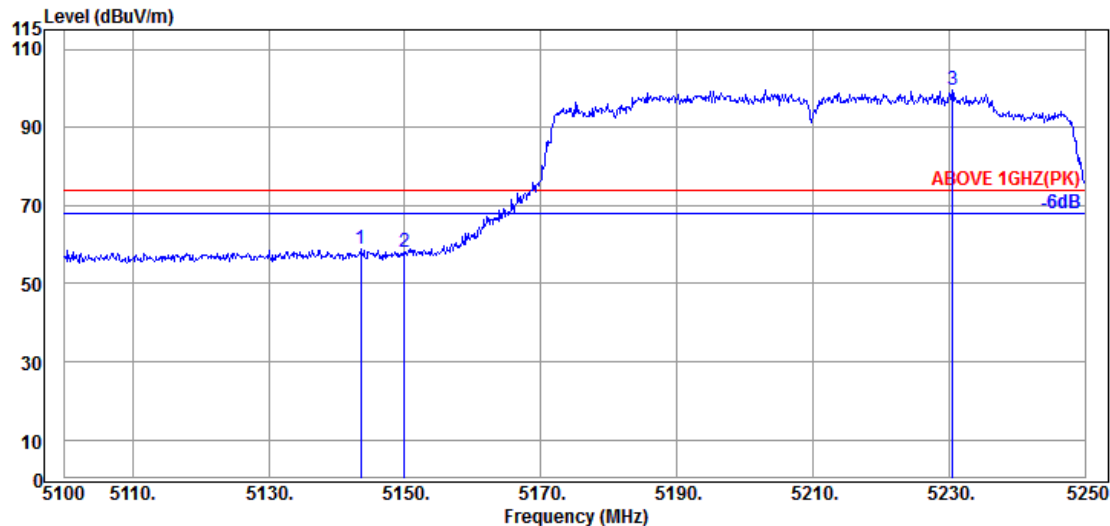

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.500	33.70	8.88	39.29	55.45	58.74	74.00	15.26	Peak
5149.950	33.70	8.88	39.29	54.93	58.22	74.00	15.78	Peak
@ 5230.500	33.75	8.93	39.28	96.09	99.49	---	---	Peak

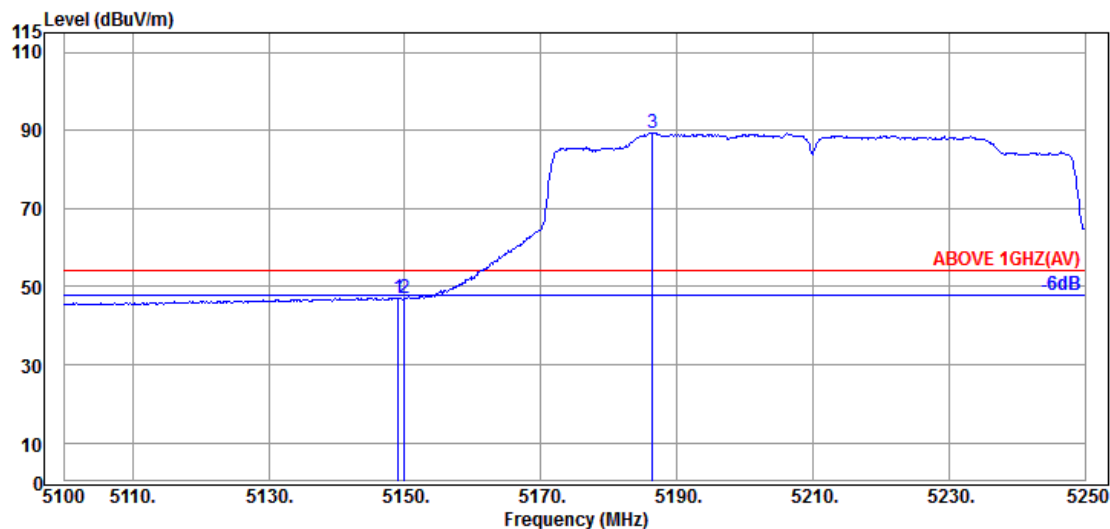


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	33.70	8.88	39.29	43.81	47.10	54.00	6.90	Average
5149.950	33.70	8.88	39.29	43.61	46.90	54.00	7.10	Average
@ 5186.400	33.70	8.90	39.28	86.06	89.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

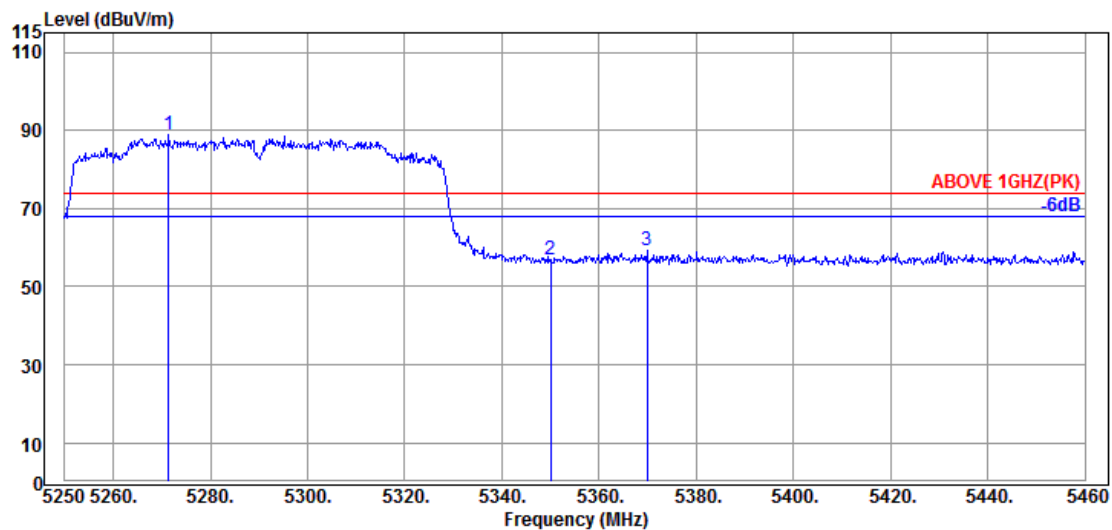

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5271.420	33.90	8.95	39.28	85.17	88.74	---	---	Peak
	5349.960	33.90	8.99	39.27	53.43	57.05	74.00	16.95	Peak
	5369.910	34.03	9.01	39.27	55.67	59.44	74.00	14.56	Peak

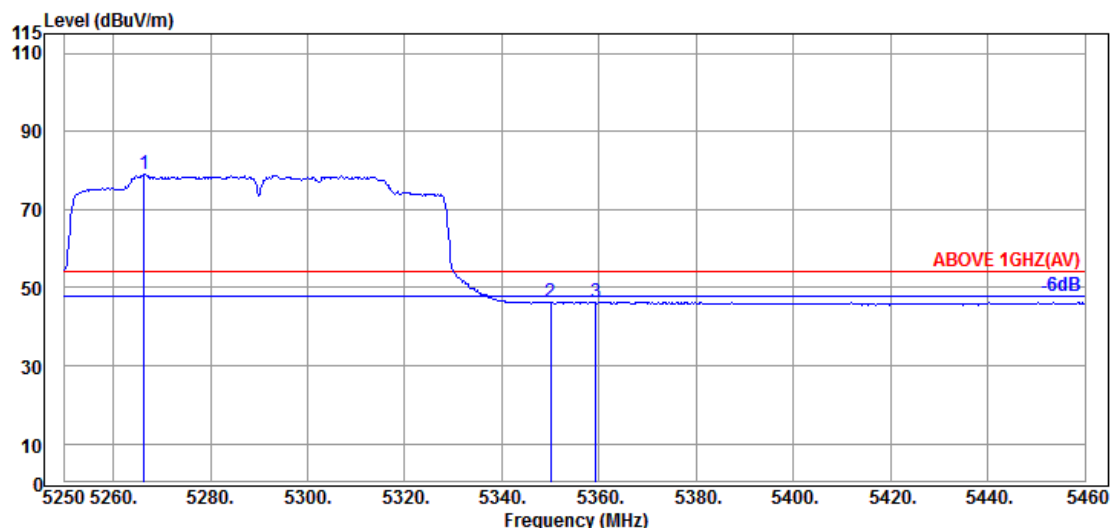

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5266.380	33.90	8.95	39.28	75.50	79.07	---	---	Average
	5349.960	33.90	8.99	39.27	42.57	46.19	54.00	7.81	Average
	5359.410	33.97	9.00	39.27	42.68	46.38	54.00	7.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

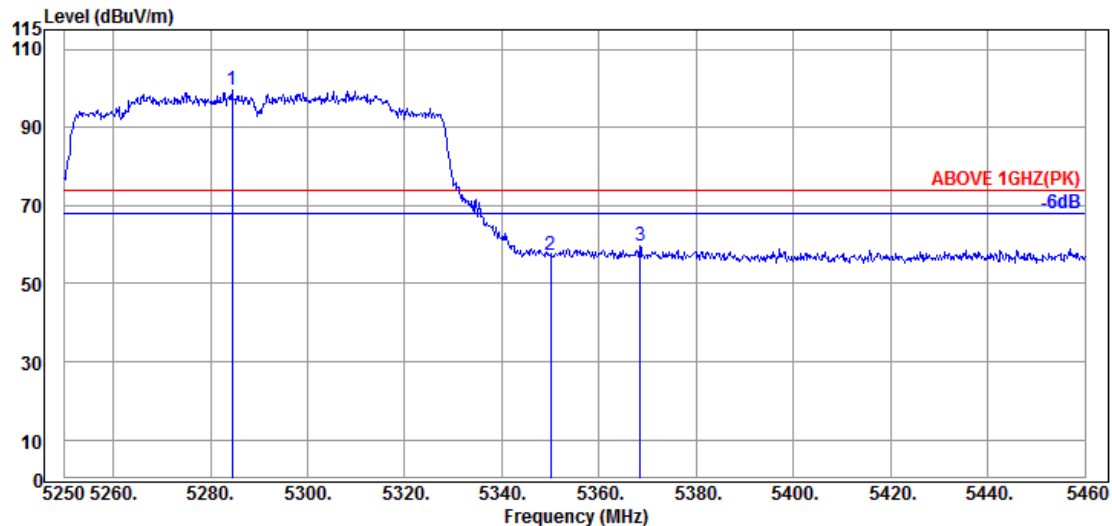

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.440	34.00	8.96	39.28	95.85	99.53	---	---	Peak
5349.960	33.90	8.99	39.27	53.84	57.46	74.00	16.54	Peak
5368.440	33.97	9.00	39.27	55.80	59.50	74.00	14.50	Peak

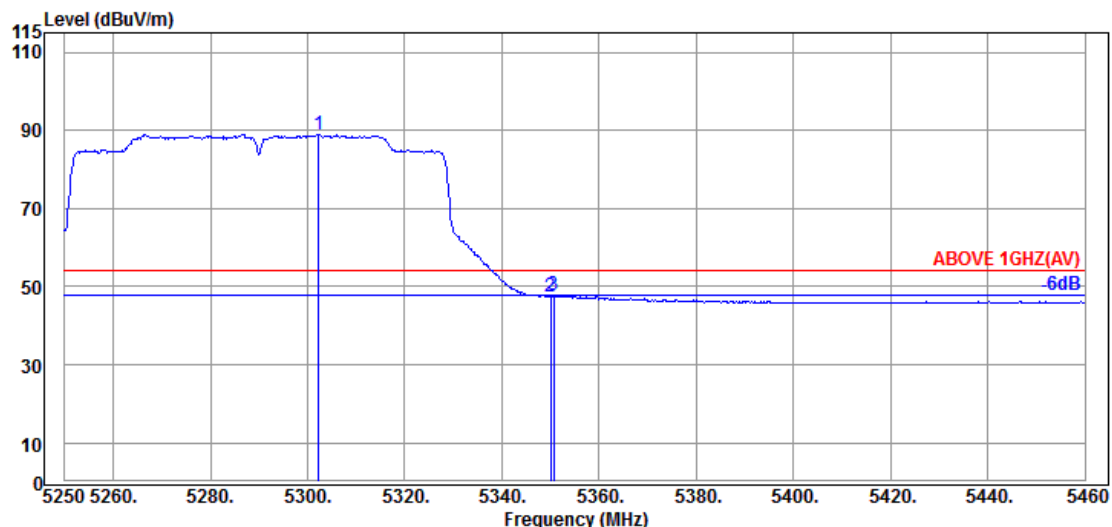


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.290	34.10	8.97	39.28	85.22	89.01	---	---	Average
5349.960	33.90	8.99	39.27	43.93	47.55	54.00	6.45	Average
5350.590	33.90	8.99	39.27	44.03	47.65	54.00	6.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

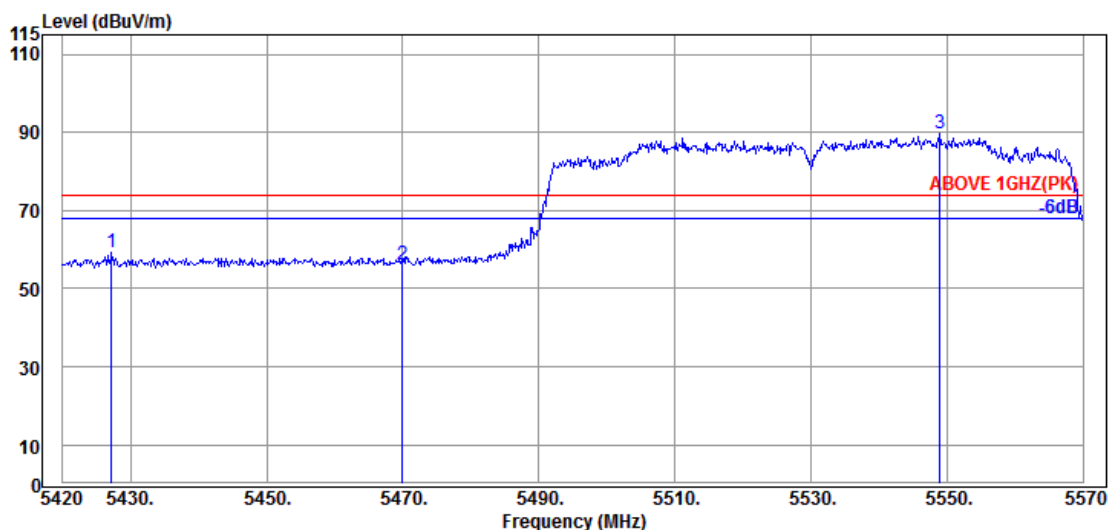

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.200	34.15	9.04	39.27	55.17	59.09	74.00	14.91	Peak
5469.950	34.17	9.06	39.26	52.09	56.06	74.00	17.94	Peak
@ 5549.000	34.10	9.10	39.27	85.61	89.54	---	---	Peak

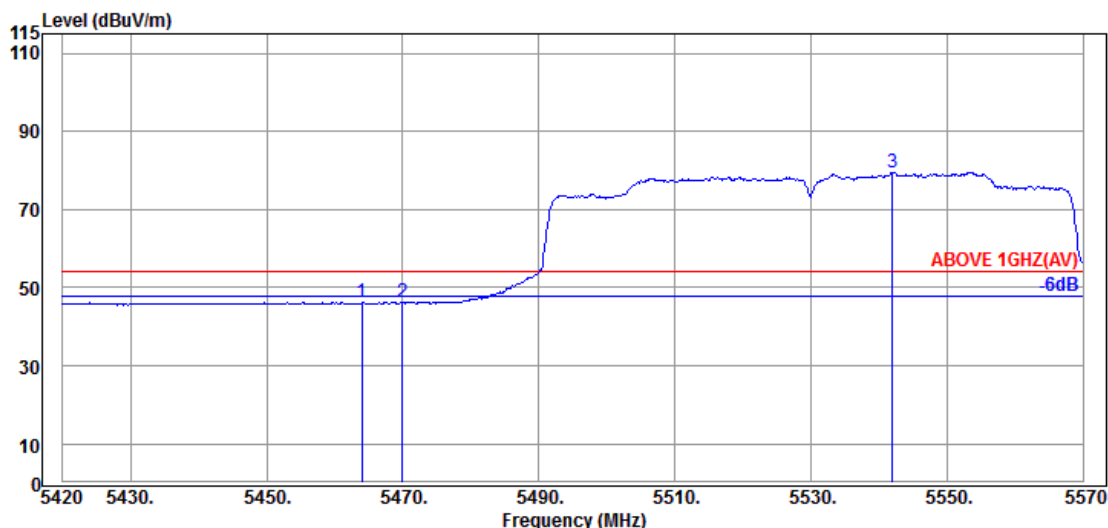


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.950	34.17	9.06	39.26	42.35	46.32	54.00	7.68	Average
5469.950	34.17	9.06	39.26	42.19	46.16	54.00	7.84	Average
@ 5541.950	34.10	9.09	39.27	75.56	79.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

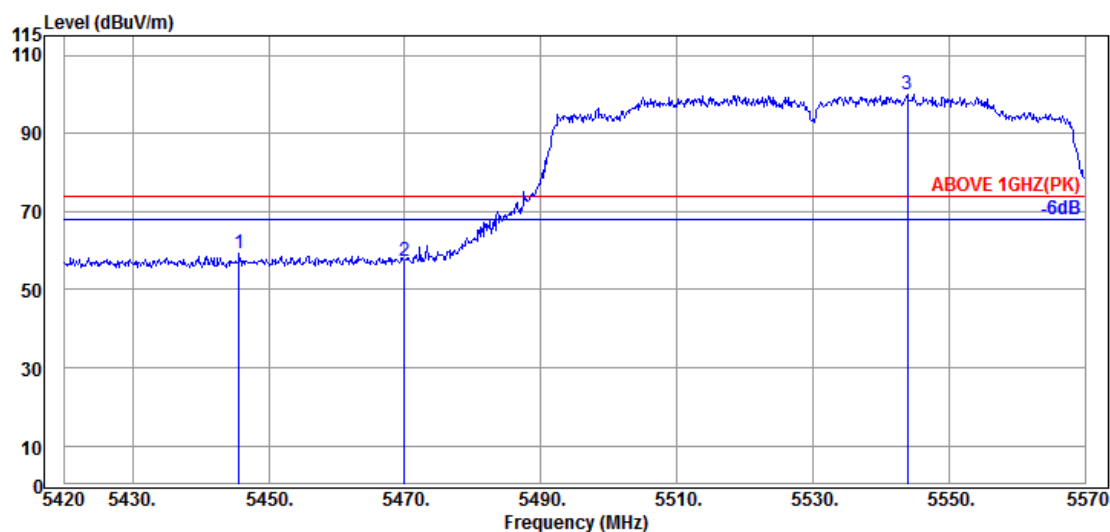

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.650	34.17	9.04	39.26	55.17	59.12	74.00	14.88	Peak
5469.950	34.17	9.06	39.26	53.22	57.19	74.00	16.81	Peak
@ 5543.900	34.10	9.10	39.27	96.18	100.11	---	---	Peak

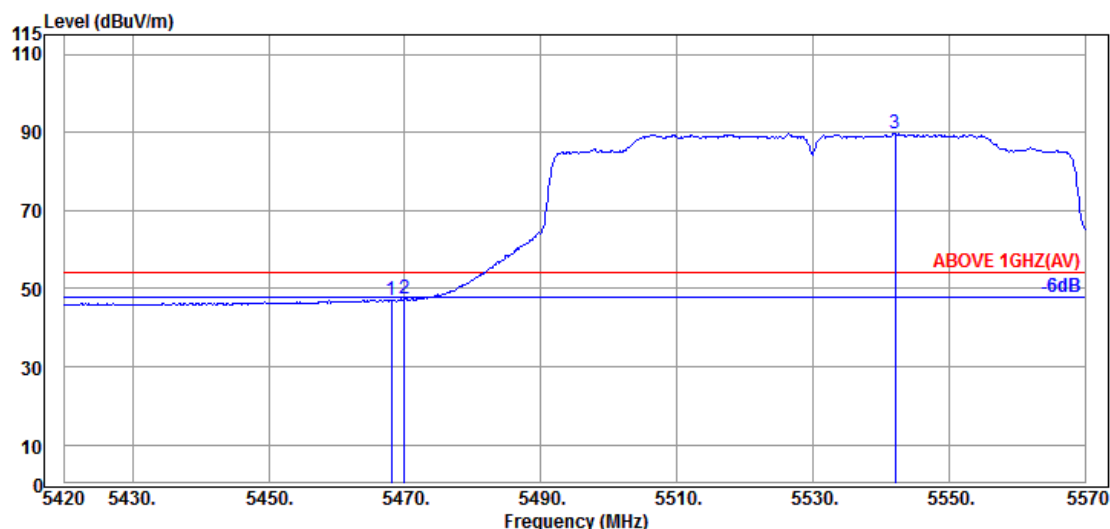

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.17	9.06	39.26	43.22	47.19	54.00	6.81	Average
5469.950	34.17	9.06	39.26	43.33	47.30	54.00	6.70	Average
@ 5542.100	34.10	9.09	39.27	85.81	89.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

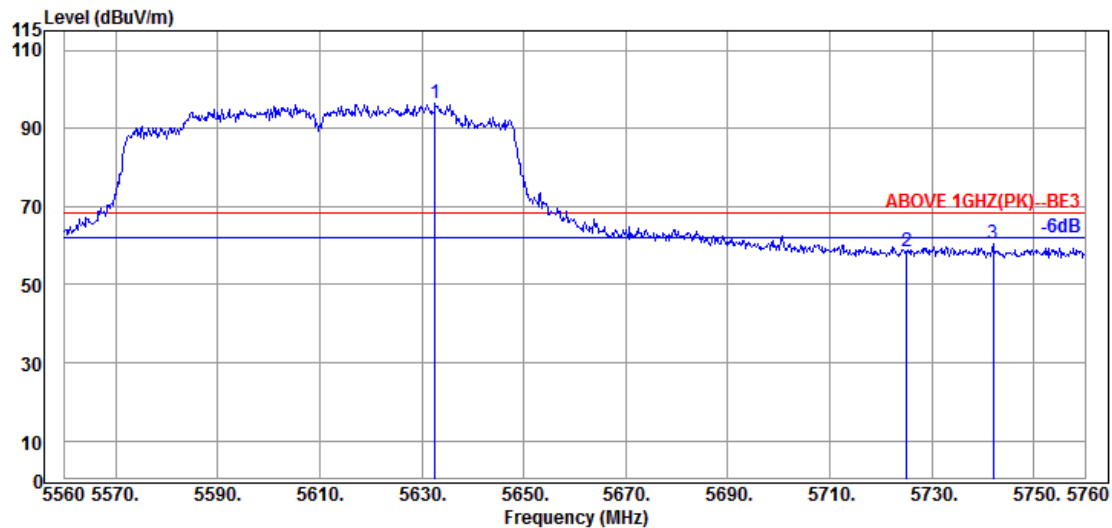

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5632.600	34.00	9.14	39.29	92.47	96.32	---	---	Peak
5725.000	33.80	9.20	39.30	54.92	58.62	68.20	9.58	Peak
5742.000	33.80	9.20	39.31	56.63	60.32	68.20	7.88	Peak

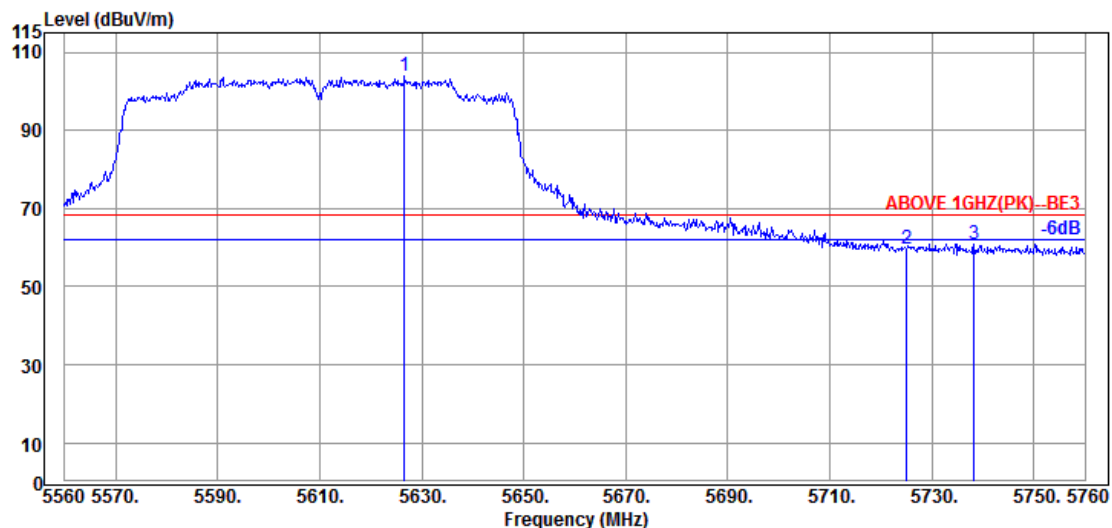

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.600	34.00	9.14	39.29	100.13	103.98	---	---	Peak
5725.000	33.80	9.20	39.30	55.81	59.51	68.20	8.69	Peak
5738.200	33.80	9.20	39.31	57.19	60.88	68.20	7.32	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

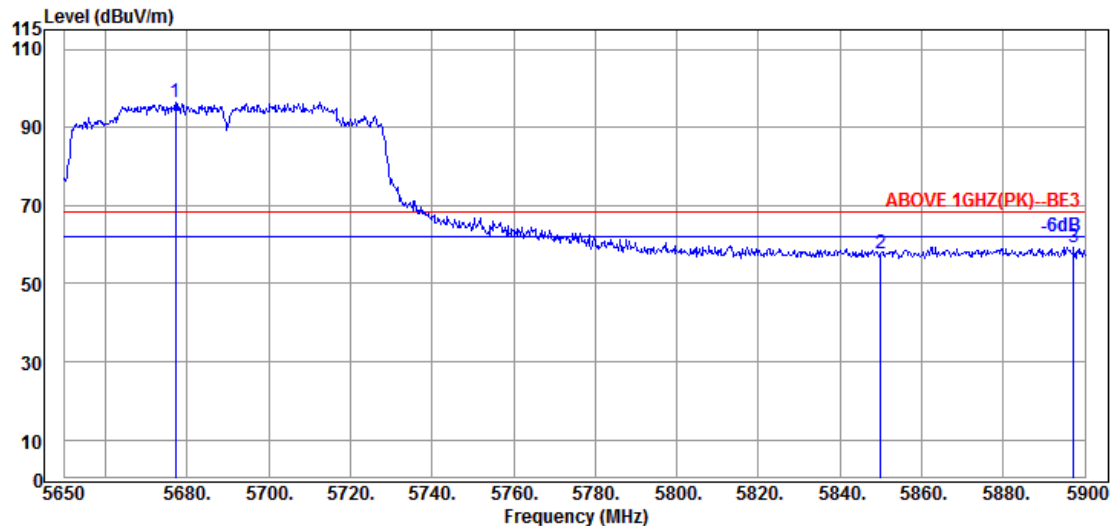

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.250	33.87	9.17	39.30	92.86	96.60	---	---	Peak
5850.000	34.10	9.25	39.33	53.53	57.55	68.20	10.65	Peak
5897.250	34.10	9.28	39.34	55.43	59.47	68.20	8.73	Peak

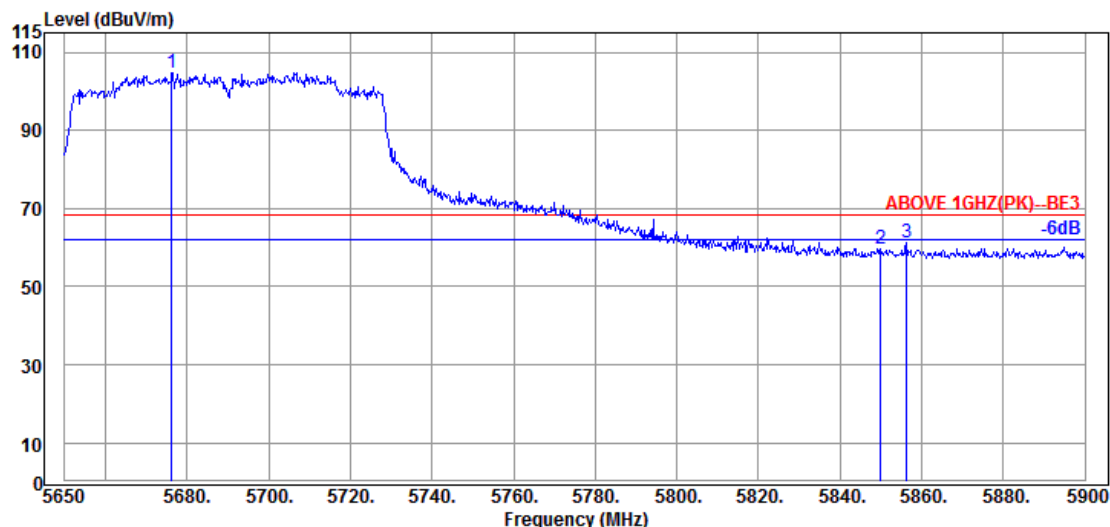


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.250	33.87	9.17	39.30	101.18	104.92	---	---	Peak
5850.000	34.10	9.25	39.33	55.77	59.79	68.20	8.41	Peak
5856.250	34.10	9.26	39.33	57.16	61.19	68.20	7.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

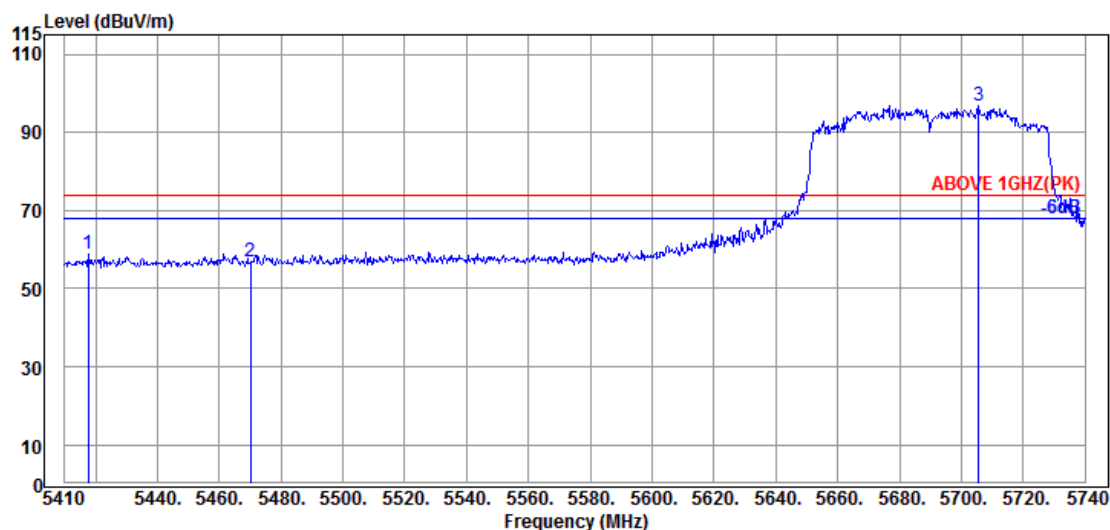

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.590	34.15	9.04	39.27	55.02	58.94	74.00	15.06	Peak
5470.060	34.17	9.06	39.26	52.96	56.93	74.00	17.07	Peak
@ 5705.680	33.80	9.19	39.30	93.31	97.00	---	---	Peak

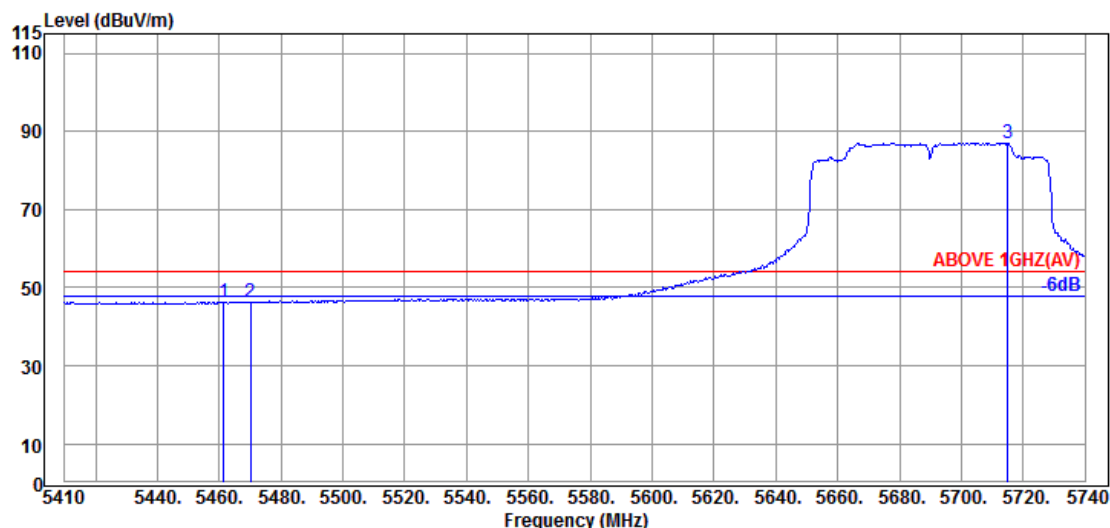


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.480	34.20	9.05	39.26	42.36	46.35	54.00	7.65	Average
5470.060	34.17	9.06	39.26	42.18	46.15	54.00	7.85	Average
@ 5714.920	33.80	9.19	39.30	83.36	87.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

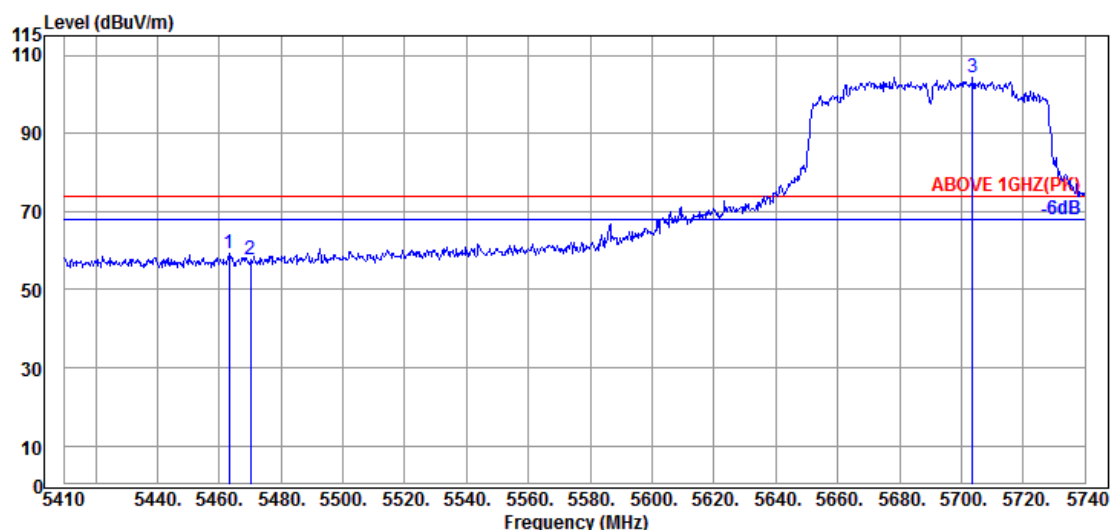

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.130	34.20	9.05	39.26	55.17	59.16	74.00	14.84	Peak
5470.060	34.17	9.06	39.26	53.92	57.89	74.00	16.11	Peak
@ 5703.700	33.80	9.18	39.30	100.81	104.49	---	---	Peak

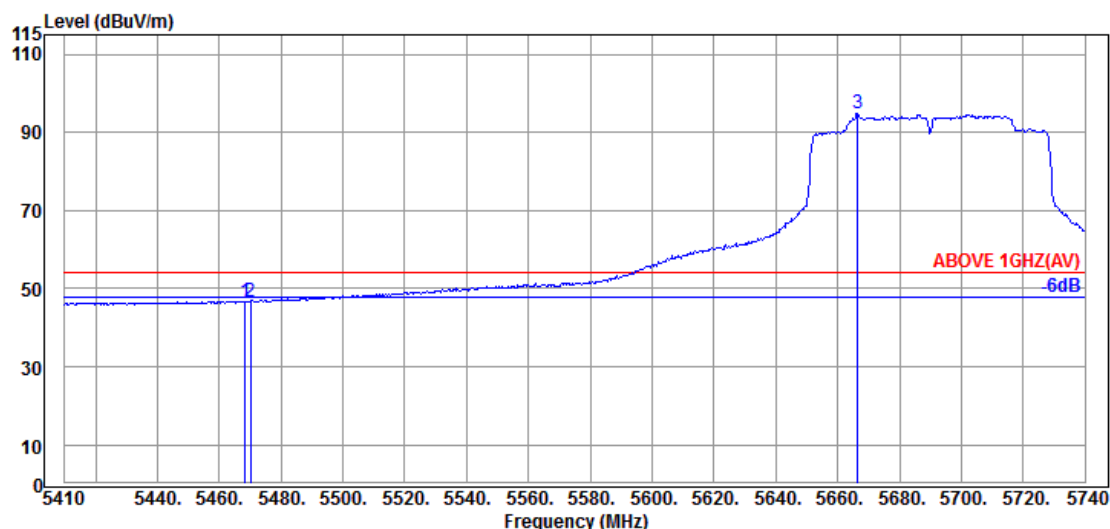

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.410	34.17	9.06	39.26	42.84	46.81	54.00	7.19	Average
5470.060	34.17	9.06	39.26	42.70	46.67	54.00	7.33	Average
@ 5666.410	33.93	9.16	39.29	90.99	94.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

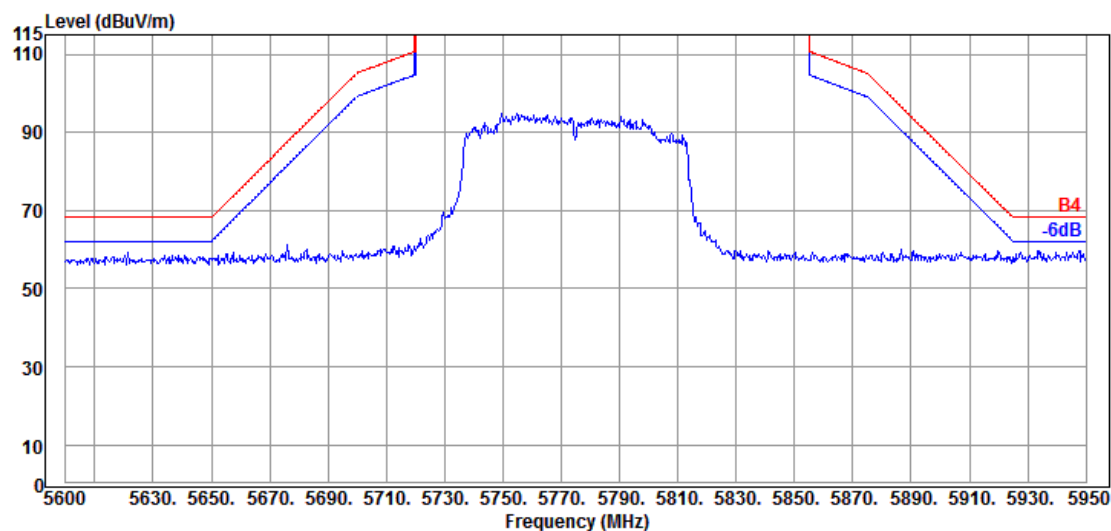

Antenna at Vertical Polarization

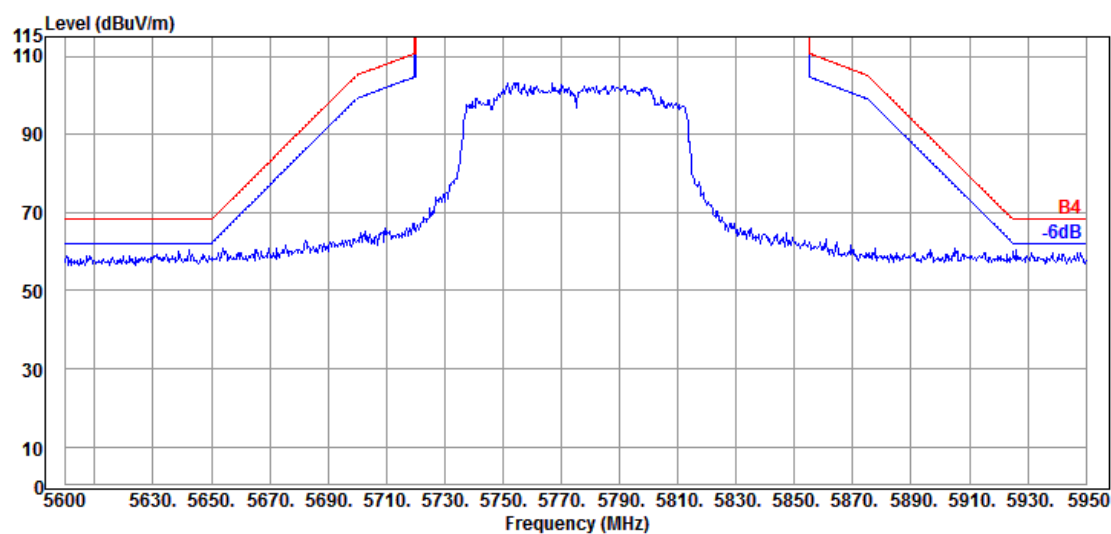

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

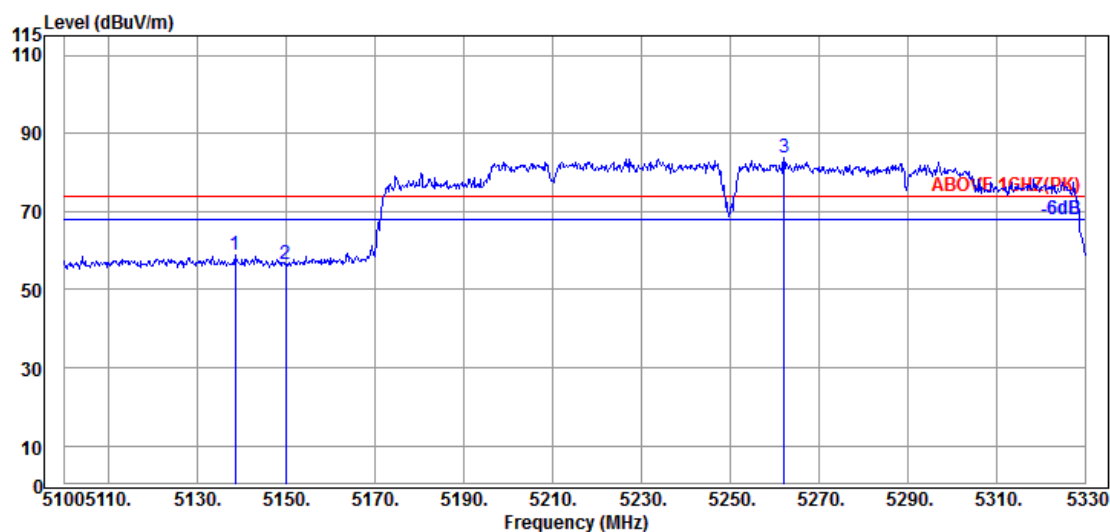

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.410	33.70	8.88	39.29	55.62	58.91	74.00	15.09	Peak
5149.910	33.70	8.88	39.29	53.22	56.51	74.00	17.49	Peak
@ 5262.150	33.90	8.95	39.28	80.26	83.83	---	---	Peak

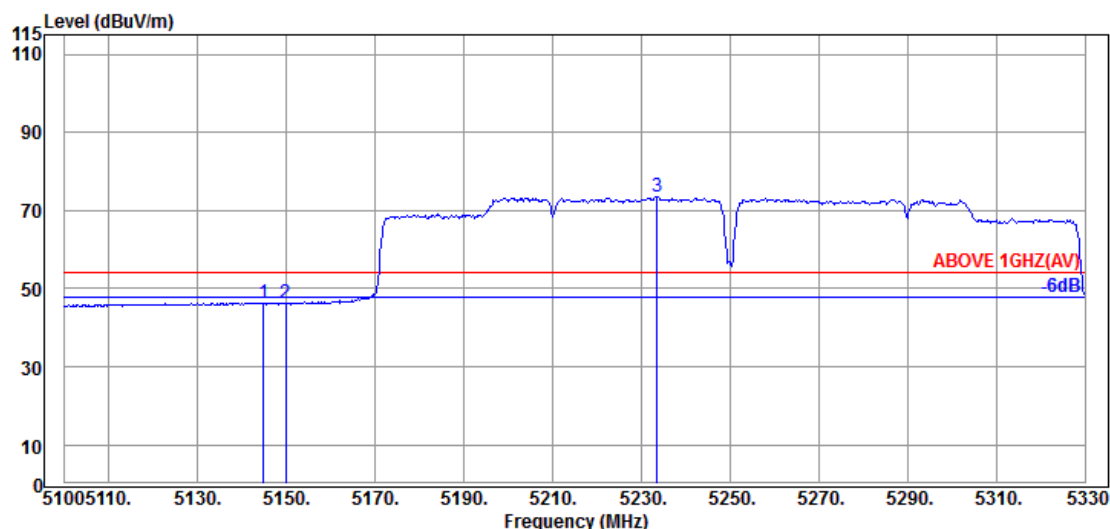


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.850	33.70	8.88	39.29	43.09	46.38	54.00	7.62	Average
5149.910	33.70	8.88	39.29	42.82	46.11	54.00	7.89	Average
@ 5233.630	33.78	8.93	39.28	70.26	73.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

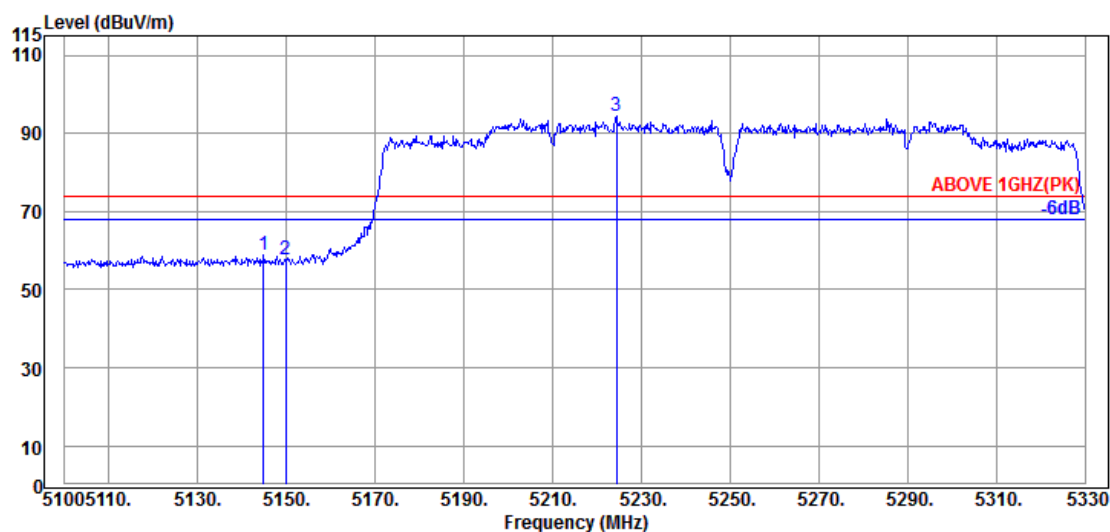

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.850	33.70	8.88	39.29	55.49	58.78	74.00	15.22	Peak
5149.910	33.70	8.88	39.29	54.48	57.77	74.00	16.23	Peak
@ 5224.430	33.75	8.93	39.28	90.90	94.30	---	---	Peak

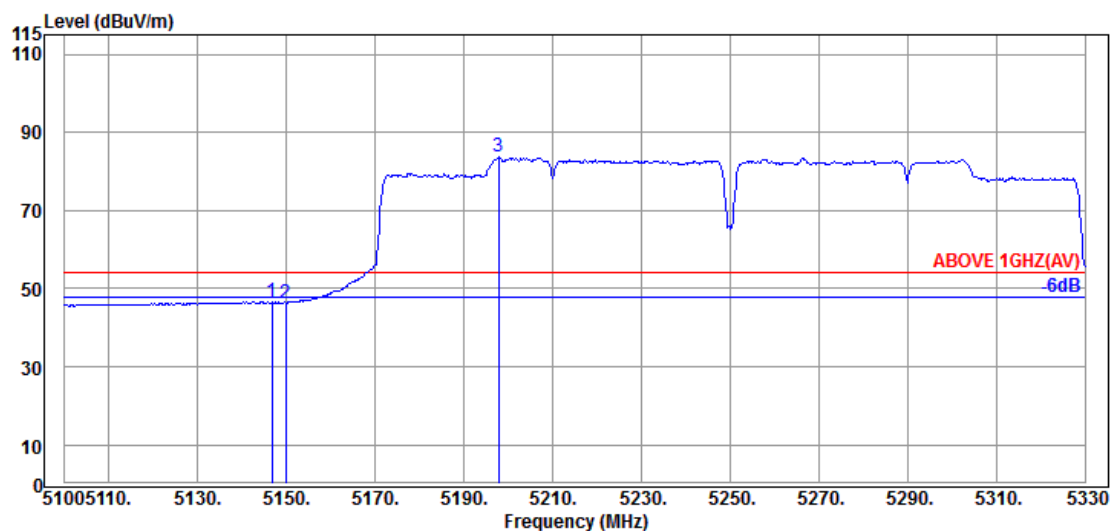


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.690	33.70	8.88	39.29	43.32	46.61	54.00	7.39	Average
5149.910	33.70	8.88	39.29	43.08	46.37	54.00	7.63	Average
@ 5197.750	33.70	8.91	39.28	80.57	83.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

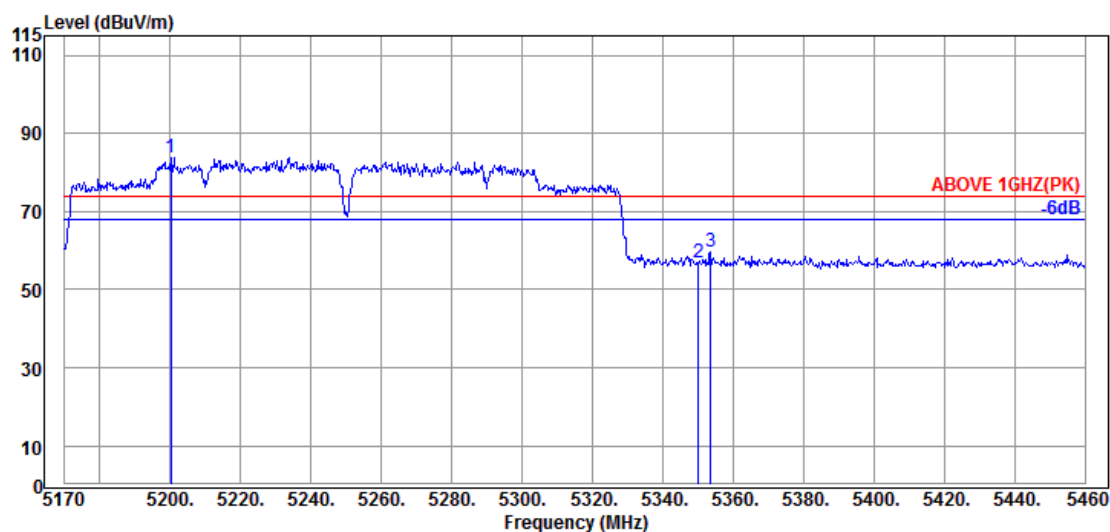

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5200.160	33.70	8.91	39.28	80.46	83.79	---	---	Peak
5350.090	33.90	8.99	39.27	53.23	56.85	74.00	17.15	Peak
5353.570	33.90	8.99	39.27	56.06	59.68	74.00	14.32	Peak

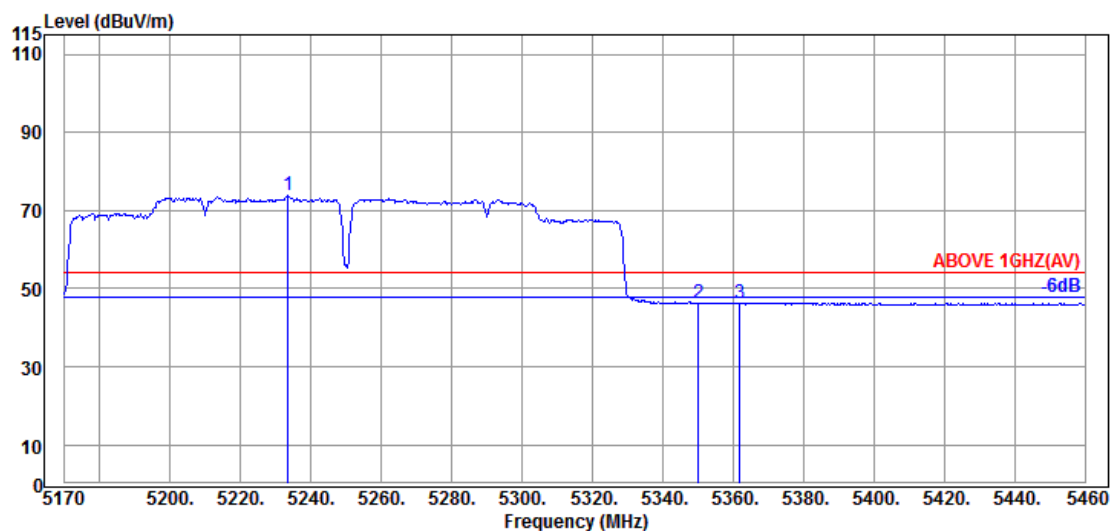


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5233.510	33.78	8.93	39.28	70.46	73.89	---	---	Average
5350.090	33.90	8.99	39.27	42.70	46.32	54.00	7.68	Average
5361.980	33.97	9.00	39.27	42.73	46.43	54.00	7.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

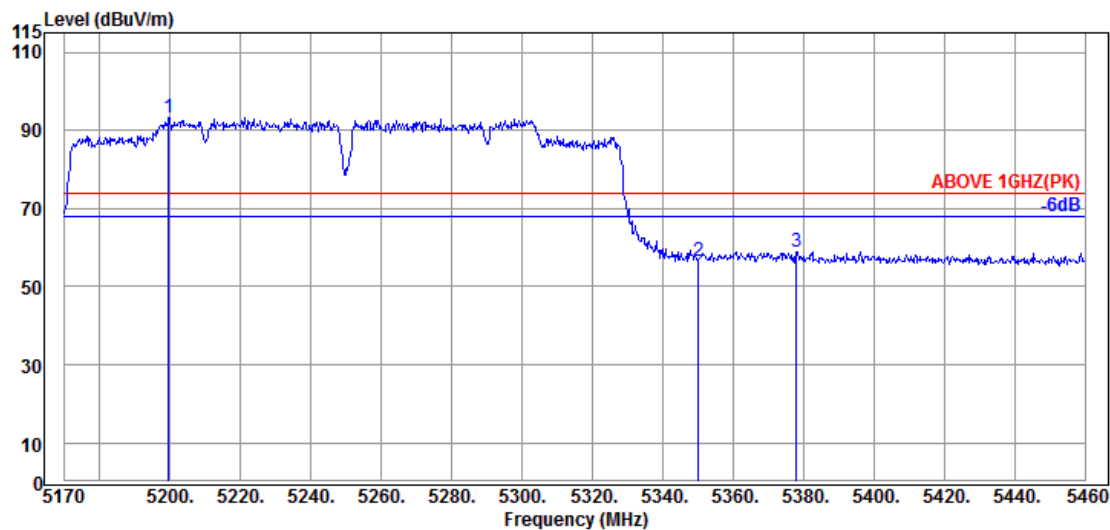

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5199.580	33.70	8.91	39.28	90.11	93.44	---	---	Peak
	5350.090	33.90	8.99	39.27	52.91	56.53	74.00	17.47	Peak
	5377.930	34.03	9.01	39.27	55.31	59.08	74.00	14.92	Peak

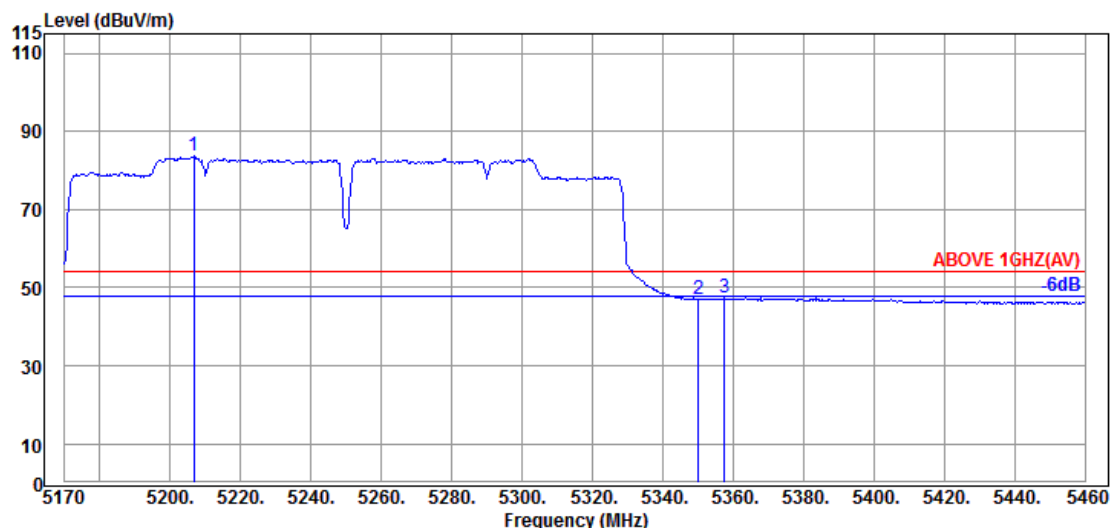


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5206.830	33.72	8.92	39.28	80.29	83.65	---	---	Average
	5350.090	33.90	8.99	39.27	43.48	47.10	54.00	6.90	Average
	5357.630	33.97	9.00	39.27	43.61	47.31	54.00	6.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

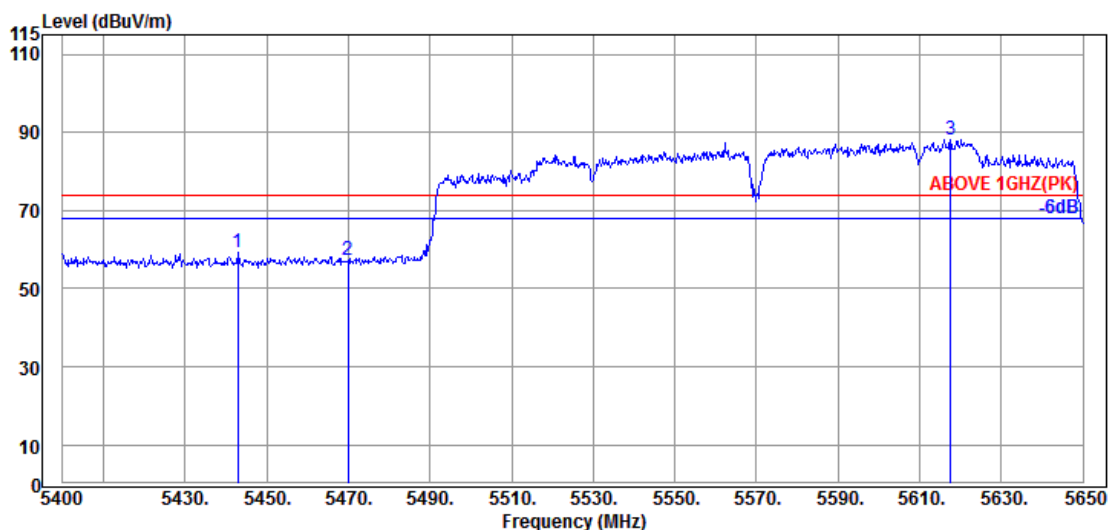

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.000	34.17	9.04	39.26	55.26	59.21	74.00	14.79	Peak
5470.000	34.17	9.06	39.26	53.17	57.14	74.00	16.86	Peak
@ 5617.500	34.00	9.14	39.29	84.32	88.17	---	---	Peak

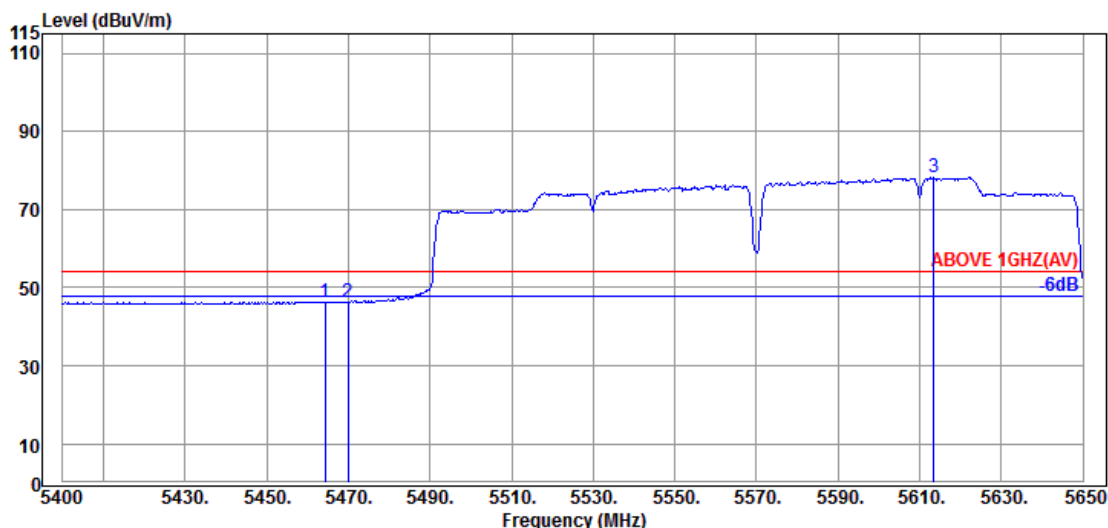

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.250	34.17	9.06	39.26	42.44	46.41	54.00	7.59	Average
5470.000	34.17	9.06	39.26	42.34	46.31	54.00	7.69	Average
@ 5613.500	34.00	9.14	39.28	74.37	78.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

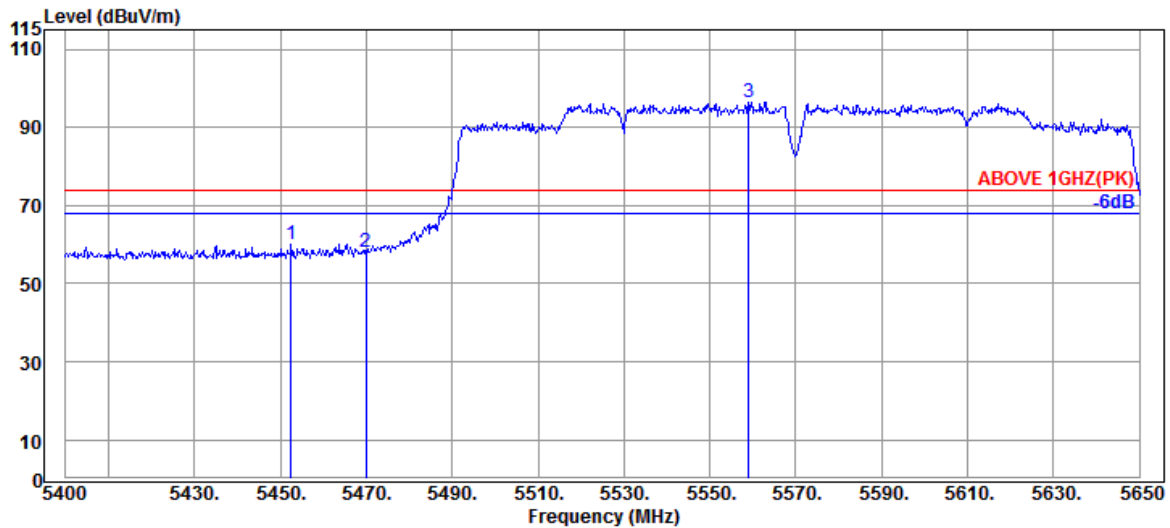

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.500	34.20	9.05	39.26	56.04	60.03	74.00	13.97	Peak
5470.000	34.17	9.06	39.26	54.26	58.23	74.00	15.77	Peak
@ 5559.000	34.10	9.10	39.27	92.62	96.55	---	---	Peak

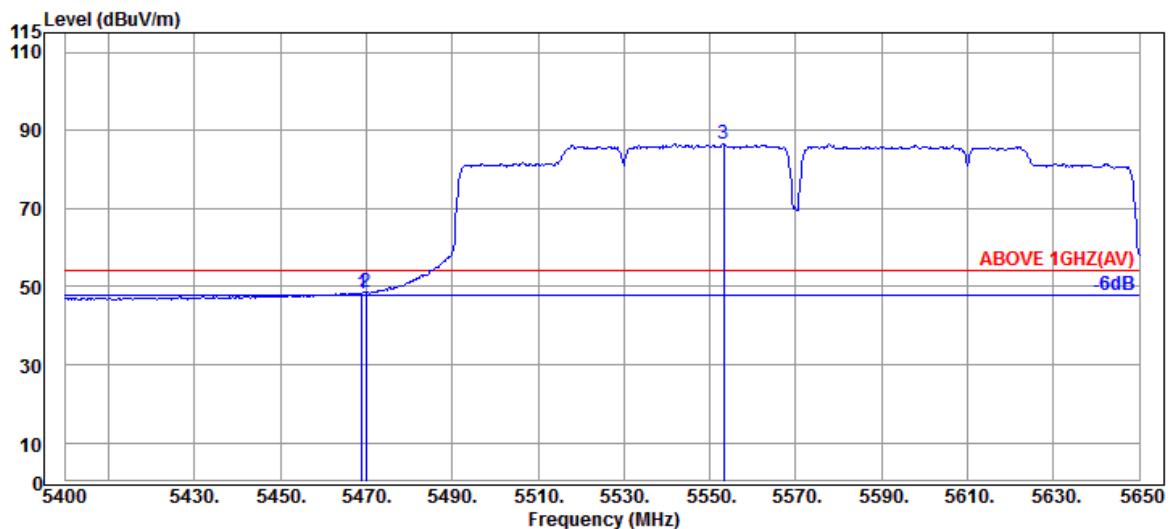

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	44.39	48.36	54.00	5.64	Average
5470.000	34.17	9.06	39.26	44.74	48.71	54.00	5.29	Average
@ 5553.250	34.10	9.10	39.27	82.55	86.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

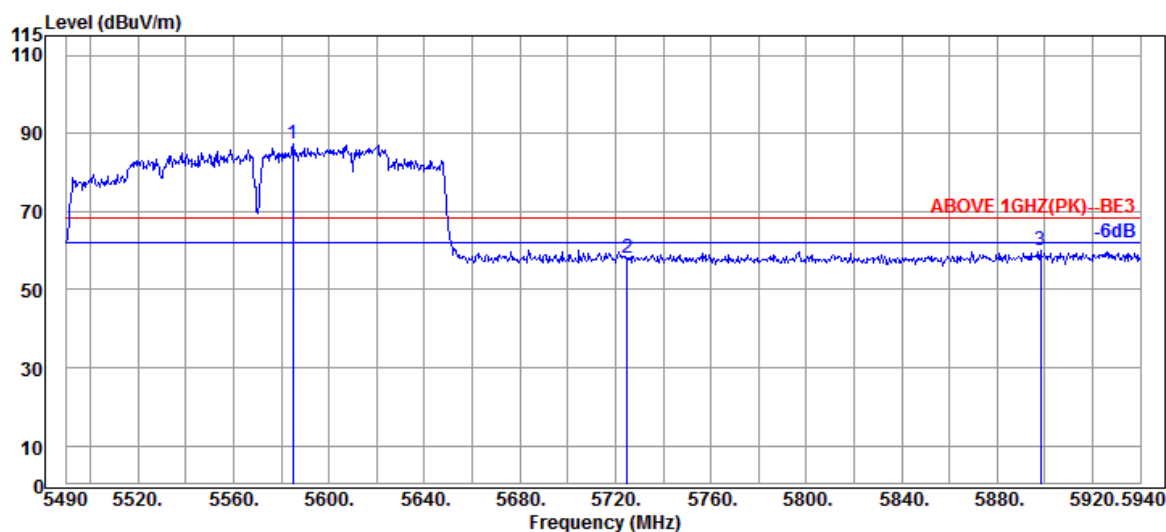

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5584.950	34.03	9.12	39.28	83.36	87.23	---	---	Peak
5724.900	33.80	9.20	39.30	54.47	58.17	68.20	10.03	Peak
5898.150	34.10	9.28	39.34	55.92	59.96	68.20	8.24	Peak

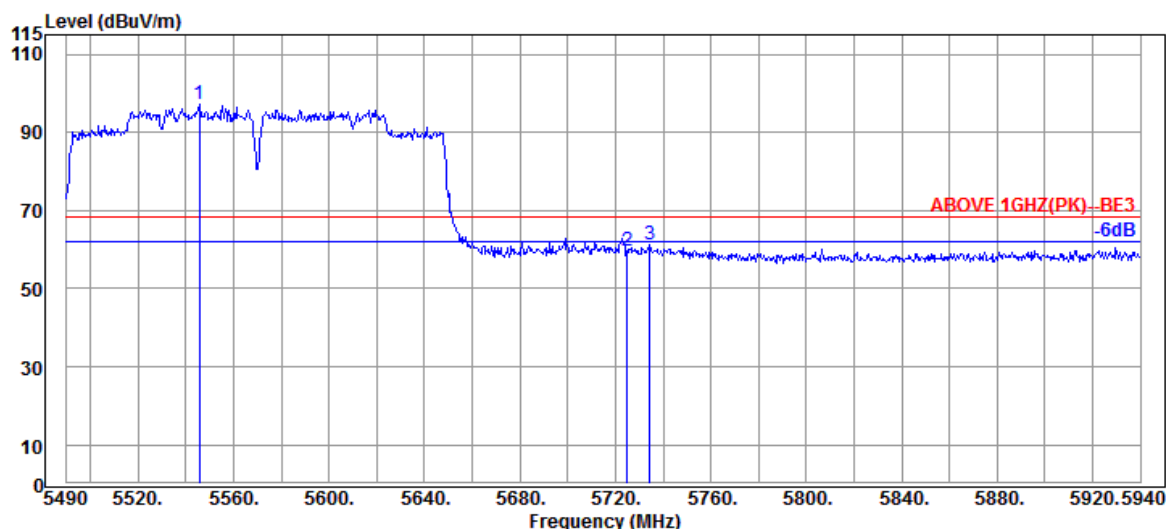

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5545.800	34.10	9.10	39.27	93.26	97.19	---	---	Peak
5724.900	33.80	9.20	39.30	56.02	59.72	68.20	8.48	Peak
5734.350	33.80	9.20	39.31	57.46	61.15	68.20	7.05	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

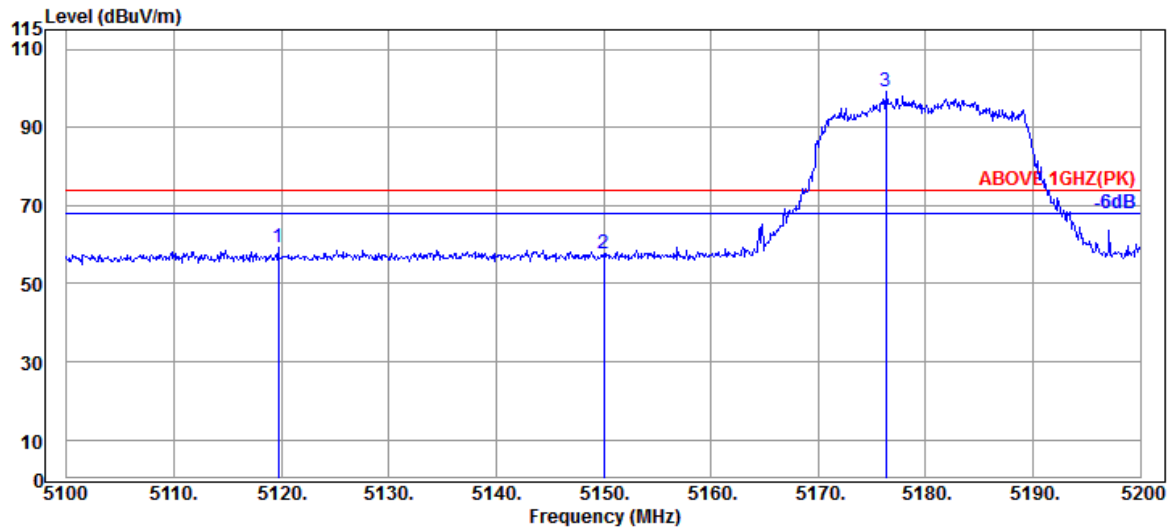

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5119.700	33.70	8.87	39.29	55.84	59.12	74.00	14.88	Peak
5150.000	33.70	8.88	39.29	54.58	57.87	74.00	16.13	Peak
@ 5176.300	33.70	8.90	39.28	95.81	99.13	---	---	Peak

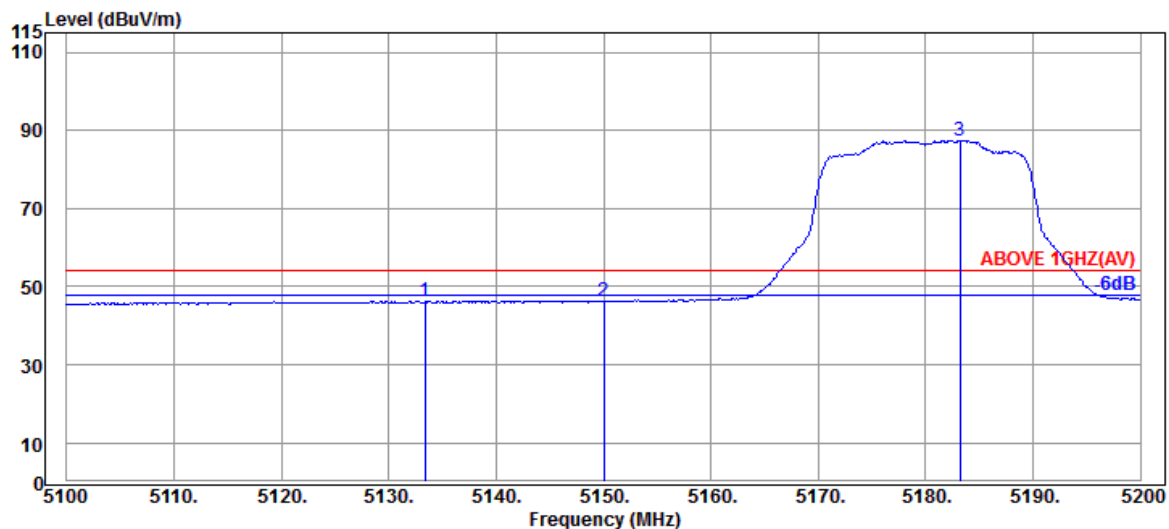

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5133.400	33.70	8.88	39.29	43.13	46.42	54.00	7.58	Average
5150.000	33.70	8.88	39.29	42.85	46.14	54.00	7.86	Average
@ 5183.200	33.70	8.90	39.28	84.11	87.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

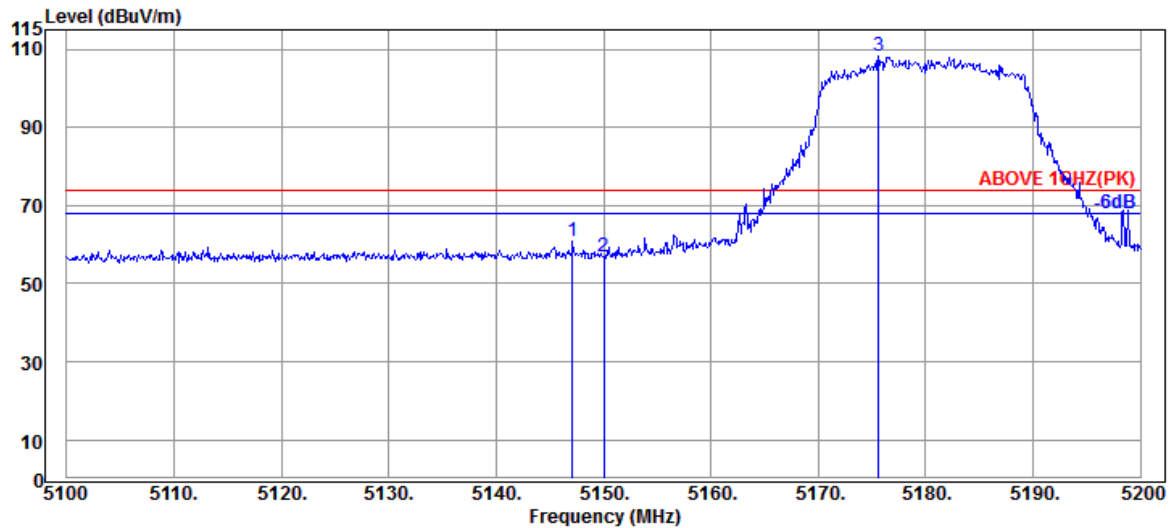

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.70	8.88	39.29	57.60	60.89	74.00	13.11	Peak
5150.000	33.70	8.88	39.29	53.68	56.97	74.00	17.03	Peak
@ 5175.600	33.70	8.90	39.28	104.96	108.28	---	---	Peak

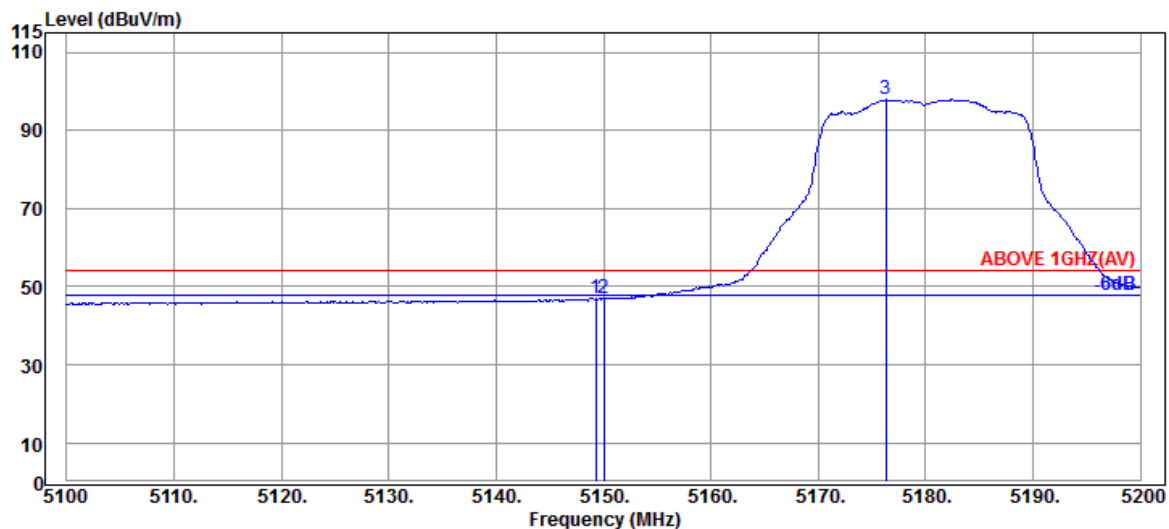

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.70	8.88	39.29	43.68	46.97	54.00	7.03	Average
5150.000	33.70	8.88	39.29	43.60	46.89	54.00	7.11	Average
@ 5176.300	33.70	8.90	39.28	94.70	98.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

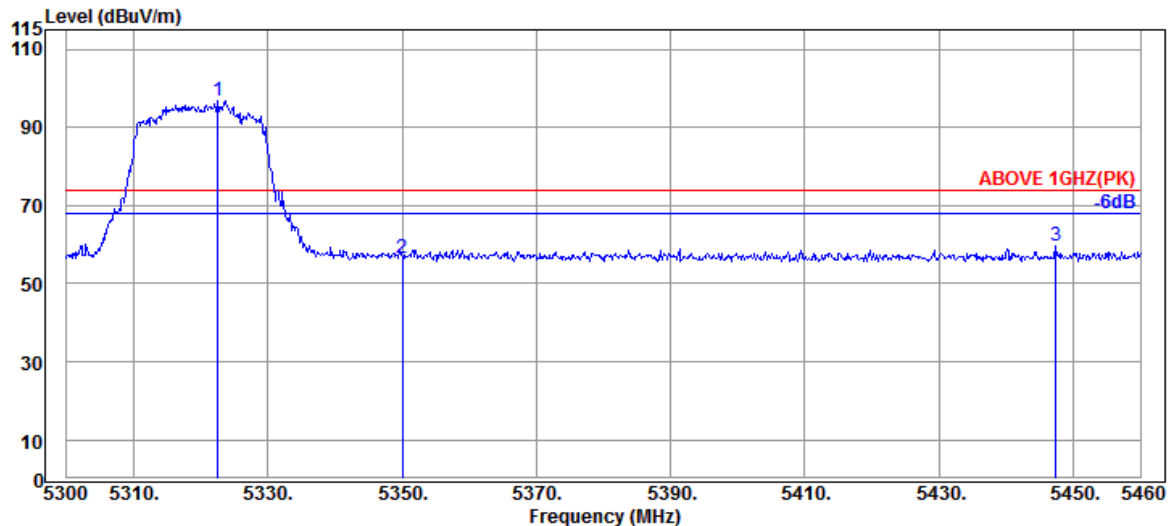

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.560	34.03	8.98	39.27	93.20	96.94	---	---	Peak
5350.080	33.90	8.99	39.27	53.05	56.67	74.00	17.33	Peak
5447.360	34.17	9.04	39.26	55.86	59.81	74.00	14.19	Peak

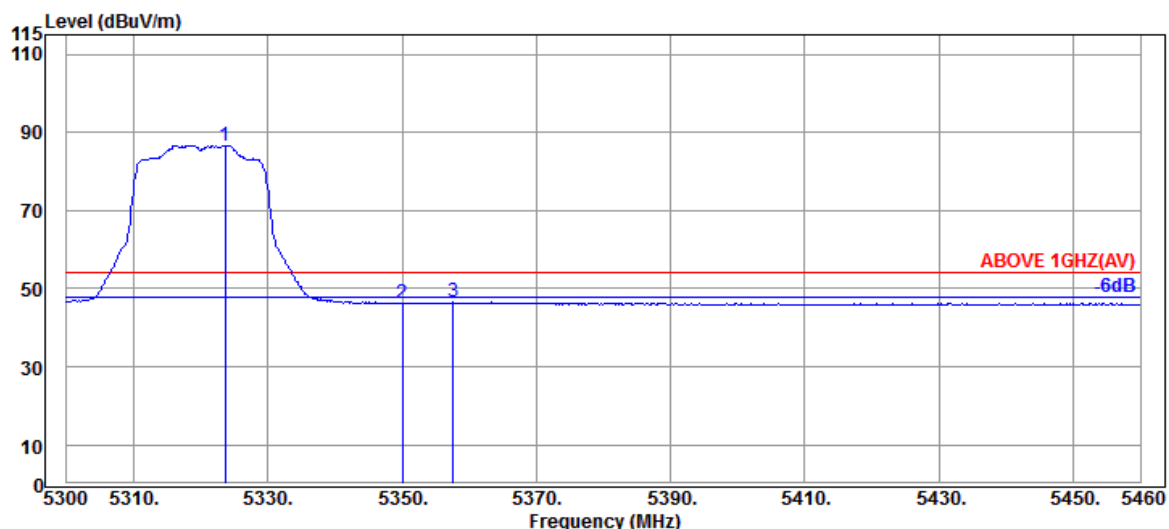

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	33.97	8.99	39.27	82.97	86.66	---	---	Average
5350.080	33.90	8.99	39.27	42.70	46.32	54.00	7.68	Average
5357.600	33.97	9.00	39.27	42.74	46.44	54.00	7.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

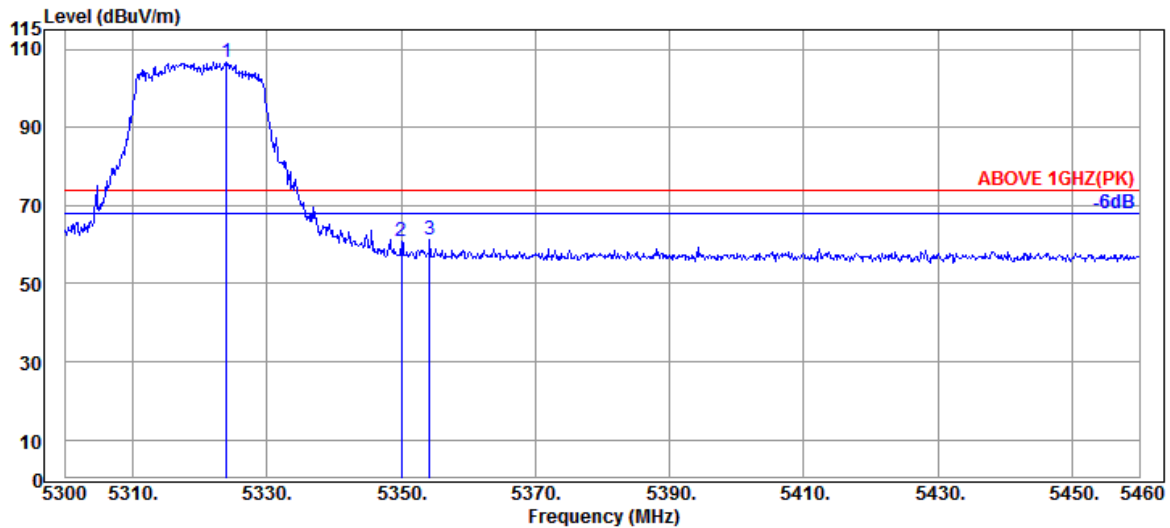

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	33.97	8.99	39.27	103.18	106.87	---	---	Peak
5350.080	33.90	8.99	39.27	57.15	60.77	74.00	13.23	Peak
5354.240	33.97	9.00	39.27	57.37	61.07	74.00	12.93	Peak

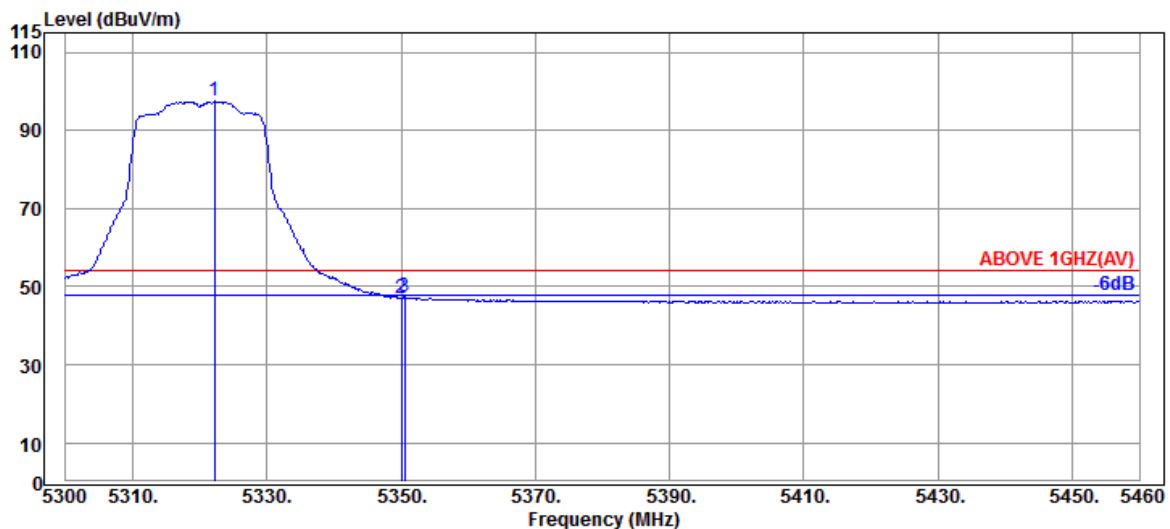

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.240	34.03	8.98	39.27	93.69	97.43	---	---	Average
5350.080	33.90	8.99	39.27	43.41	47.03	54.00	6.97	Average
5350.560	33.90	8.99	39.27	43.70	47.32	54.00	6.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

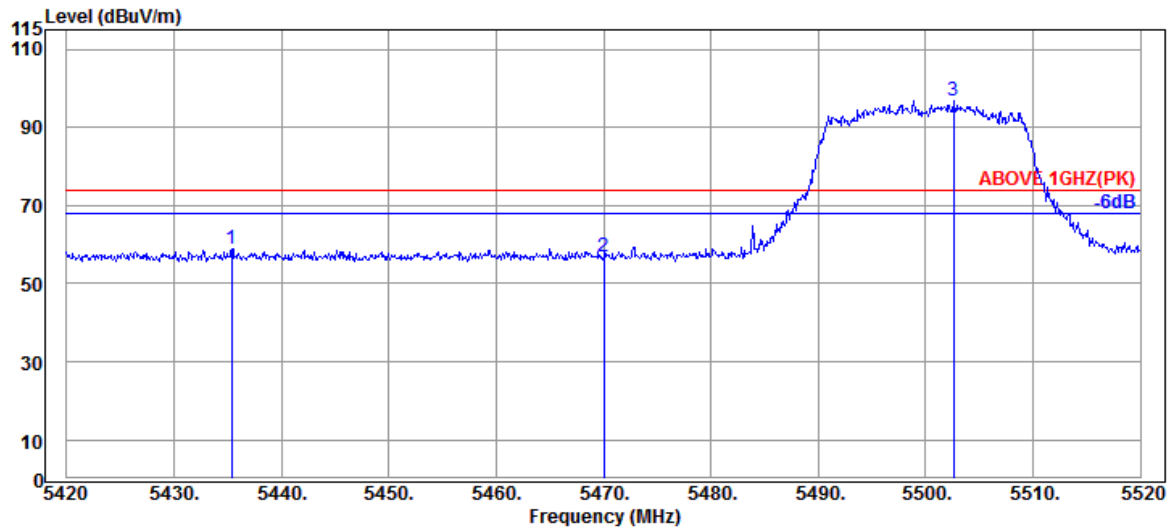

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.400	34.17	9.04	39.26	54.85	58.80	74.00	15.20	Peak
5470.000	34.17	9.06	39.26	53.11	57.08	74.00	16.92	Peak
@ 5502.600	34.10	9.08	39.26	92.77	96.69	---	---	Peak

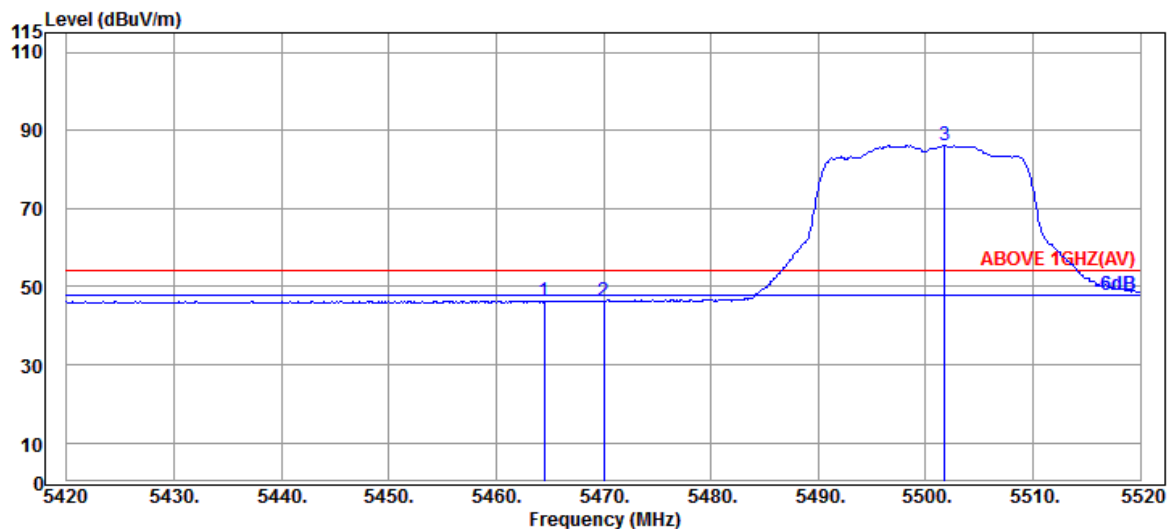

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.17	9.06	39.26	42.36	46.33	54.00	7.67	Average
5470.000	34.17	9.06	39.26	42.24	46.21	54.00	7.79	Average
@ 5501.800	34.10	9.08	39.26	82.15	86.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

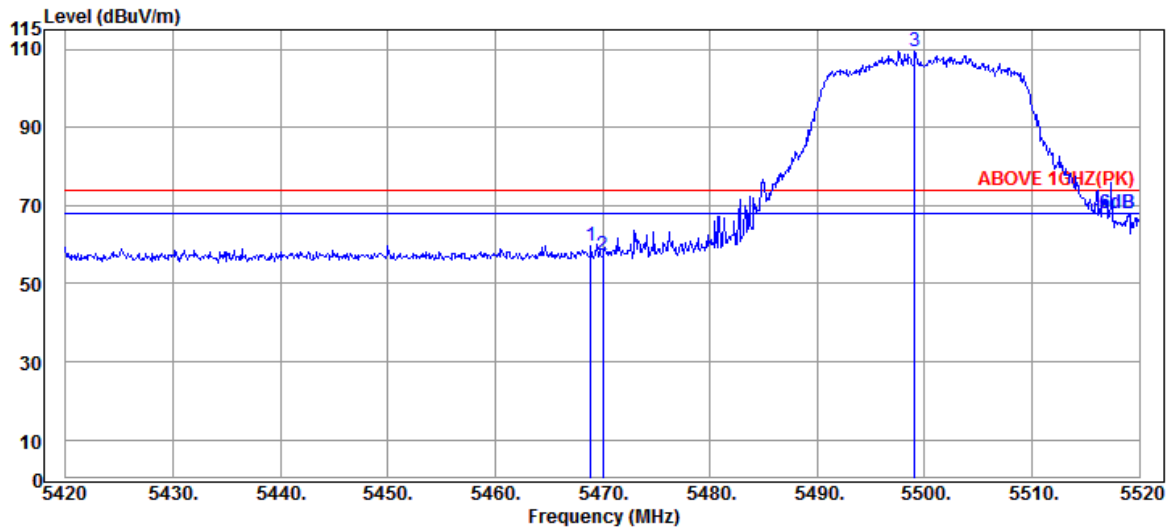

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.17	9.06	39.26	55.79	59.76	74.00	14.24	Peak
5470.000	34.17	9.06	39.26	53.23	57.20	74.00	16.80	Peak
@ 5499.100	34.10	9.08	39.26	105.69	109.61	---	---	Peak

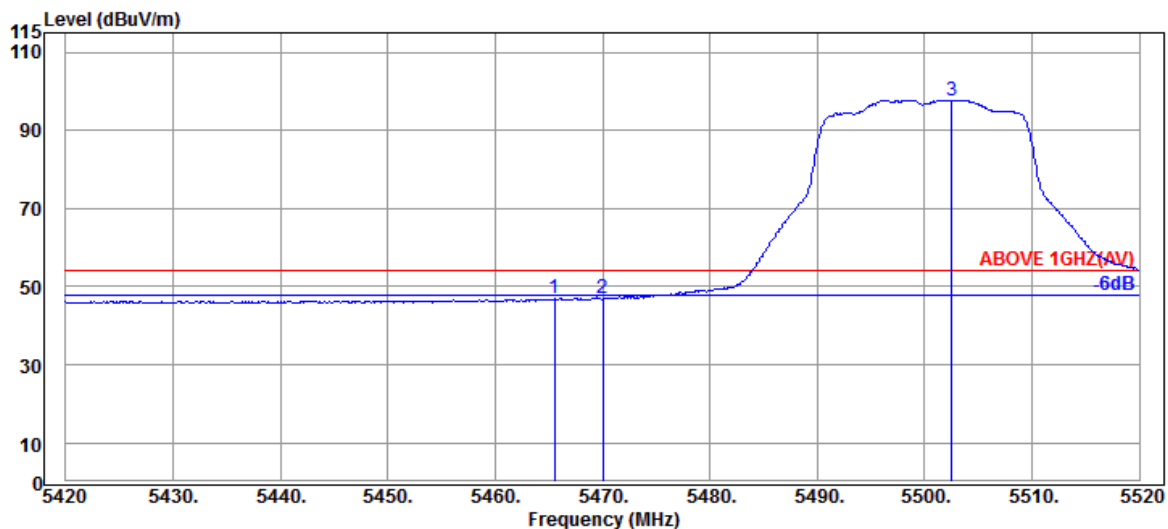

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.17	9.06	39.26	43.00	46.97	54.00	7.03	Average
5470.000	34.17	9.06	39.26	42.99	46.96	54.00	7.04	Average
@ 5502.500	34.10	9.08	39.26	93.87	97.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

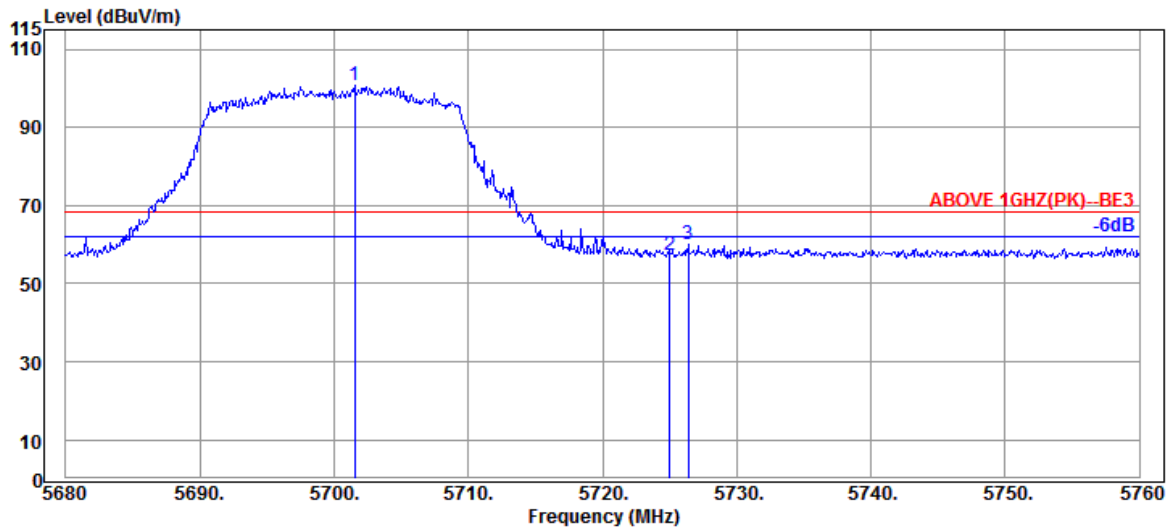

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.520	33.80	9.18	39.30	97.00	100.68	---	---	Peak
5725.040	33.80	9.20	39.30	53.64	57.34	68.20	10.86	Peak
5726.400	33.80	9.20	39.31	56.41	60.10	68.20	8.10	Peak

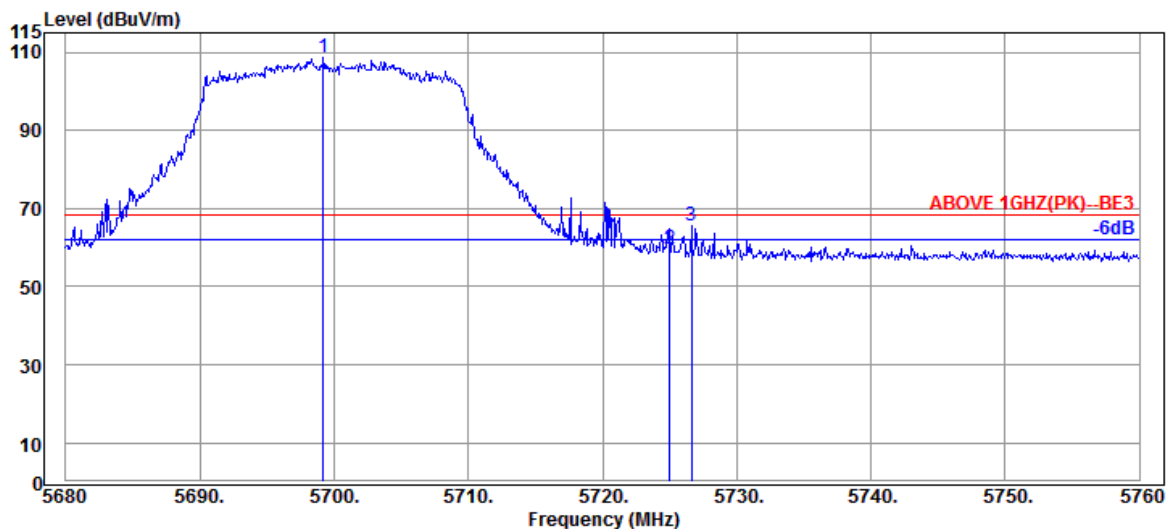

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.200	33.80	9.18	39.30	105.14	108.82	---	---	Peak
5725.040	33.80	9.20	39.30	55.84	59.54	68.20	8.66	Peak
5726.640	33.80	9.20	39.31	61.92	65.61	68.20	2.59	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

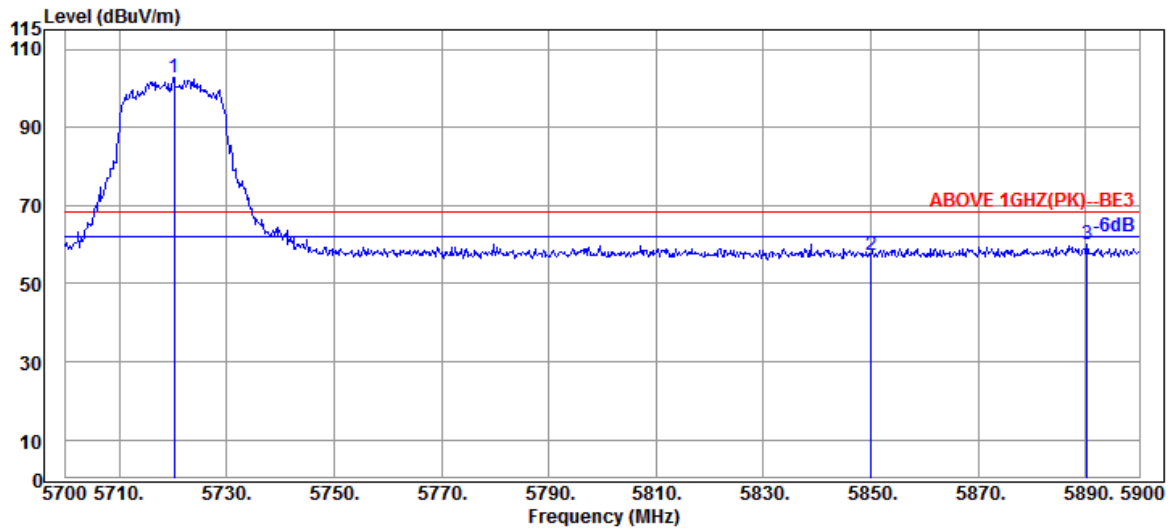

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.200	33.80	9.19	39.30	99.17	102.86	---	---	Peak
5850.000	34.10	9.25	39.33	53.29	57.31	68.20	10.89	Peak
5890.200	34.10	9.28	39.34	56.22	60.26	68.20	7.94	Peak

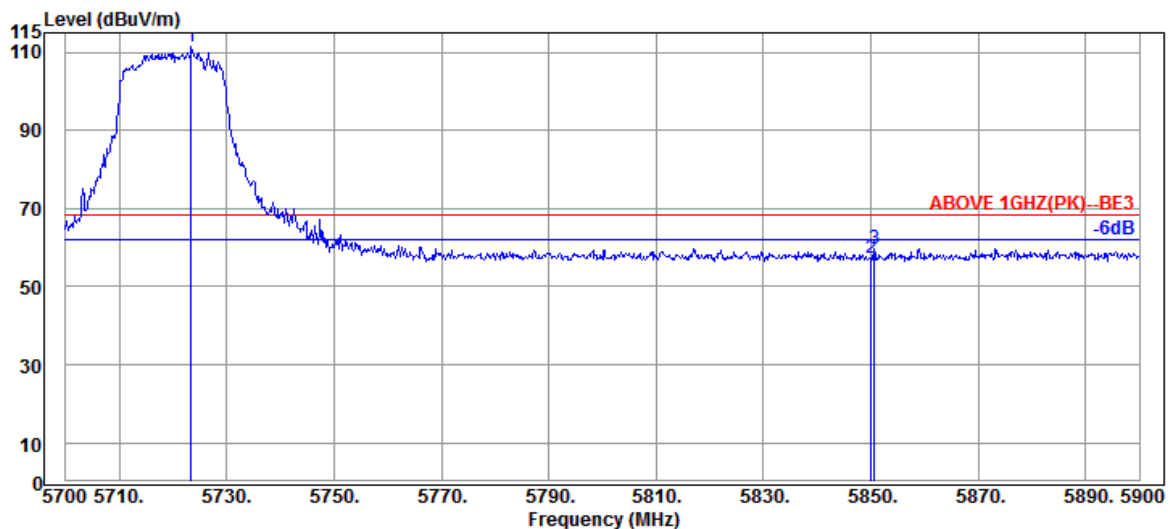

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.400	33.80	9.20	39.30	107.55	111.25	---	---	Peak
5850.000	34.10	9.25	39.33	53.19	57.21	68.20	10.99	Peak
5850.600	34.10	9.25	39.33	55.76	59.78	68.20	8.42	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

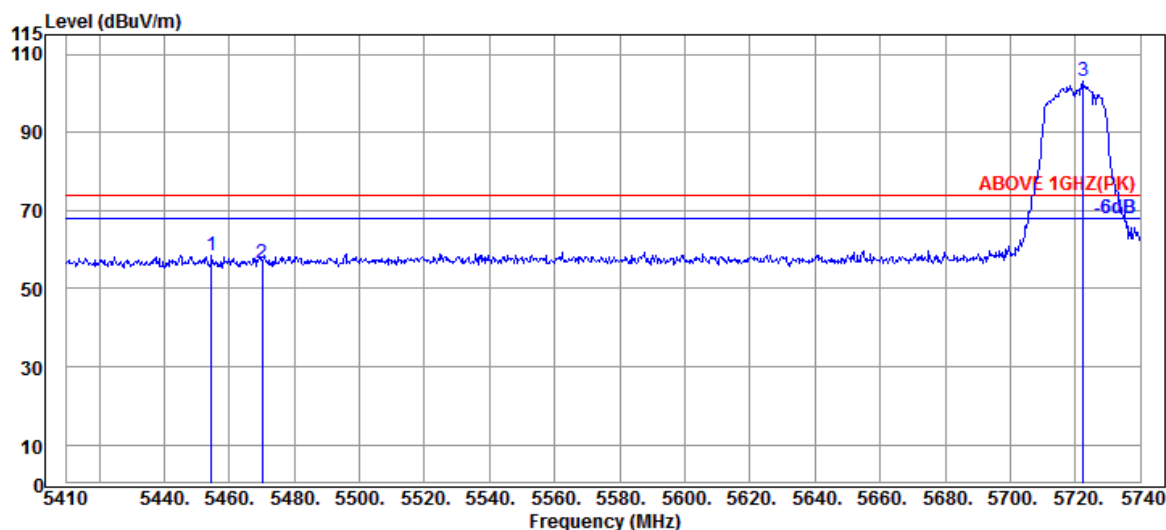

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.550	34.20	9.05	39.26	54.49	58.48	74.00	15.52	Peak
5470.060	34.17	9.06	39.26	52.69	56.66	74.00	17.34	Peak
@ 5722.510	33.80	9.20	39.30	99.35	103.05	---	---	Peak

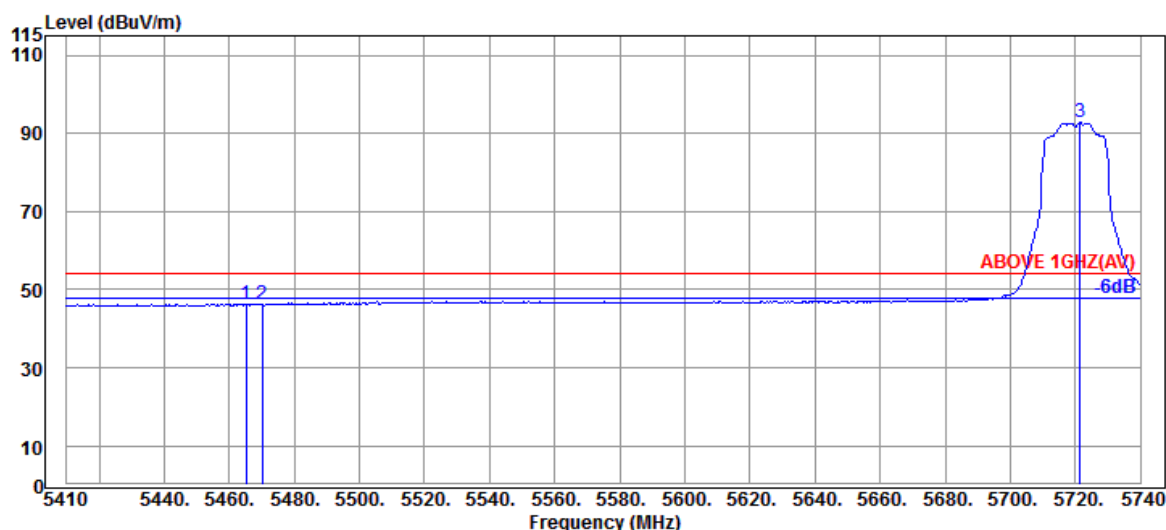

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.110	34.17	9.06	39.26	42.37	46.34	54.00	7.66	Average
5470.060	34.17	9.06	39.26	42.43	46.40	54.00	7.60	Average
@ 5721.520	33.80	9.19	39.30	89.16	92.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

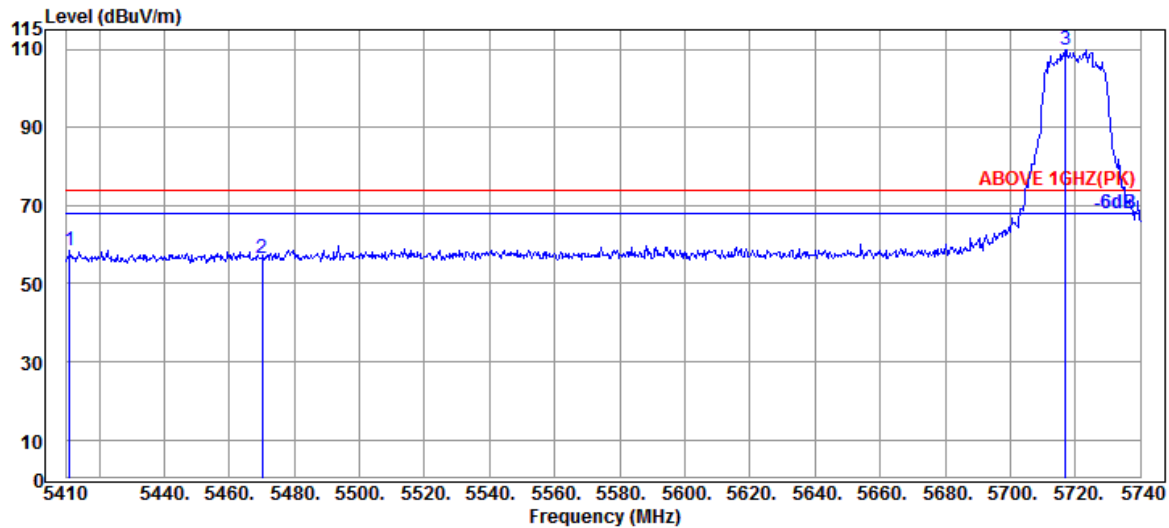

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.990	34.12	9.03	39.27	54.56	58.44	74.00	15.56	Peak
5470.060	34.17	9.06	39.26	52.38	56.35	74.00	17.65	Peak
@ 5716.900	33.80	9.19	39.30	106.26	109.95	---	---	Peak

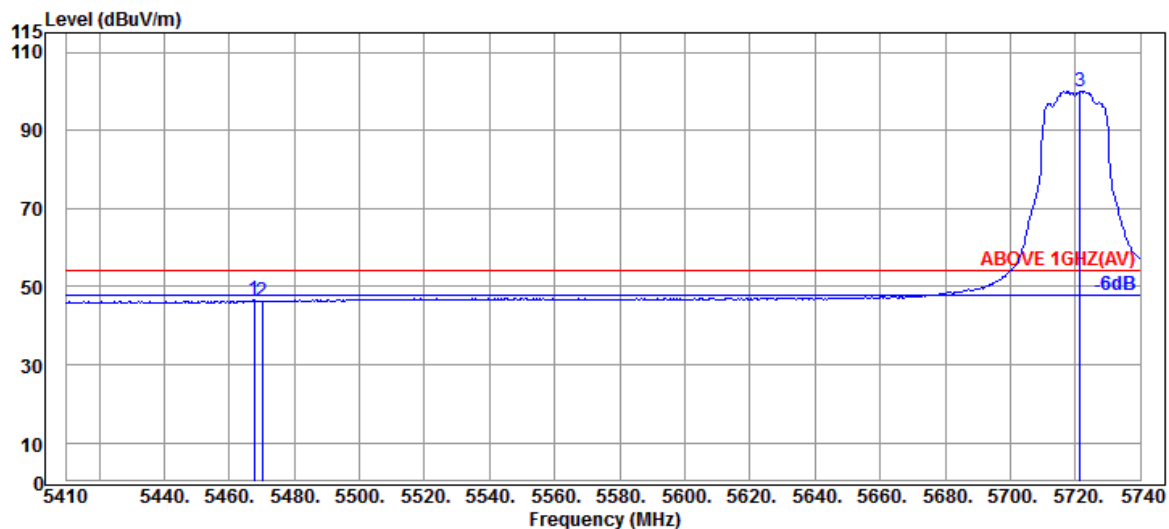

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.17	9.06	39.26	42.48	46.45	54.00	7.55	Average
5470.060	34.17	9.06	39.26	42.32	46.29	54.00	7.71	Average
@ 5721.520	33.80	9.19	39.30	96.40	100.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

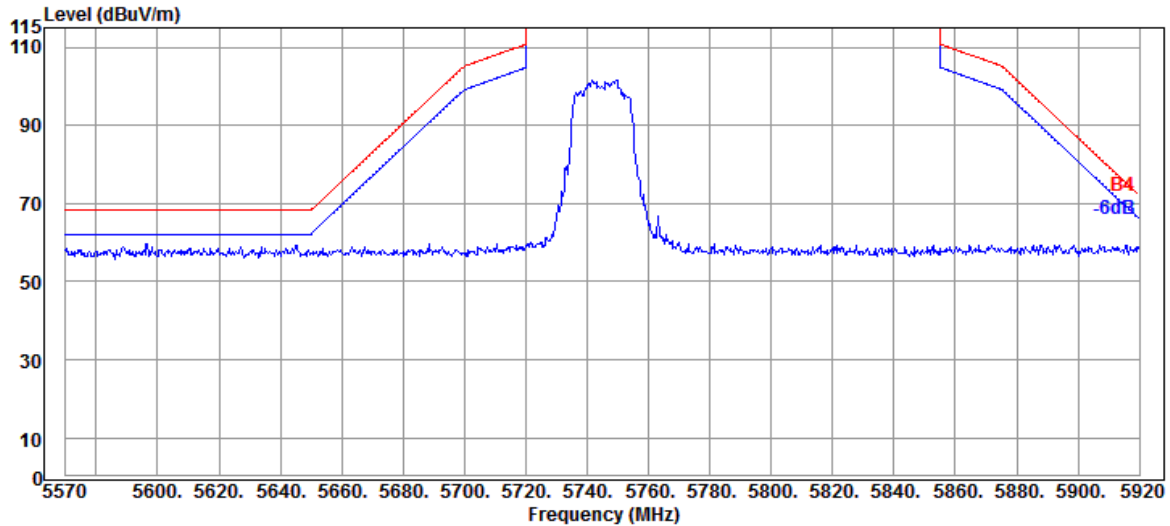

Antenna at Vertical Polarization

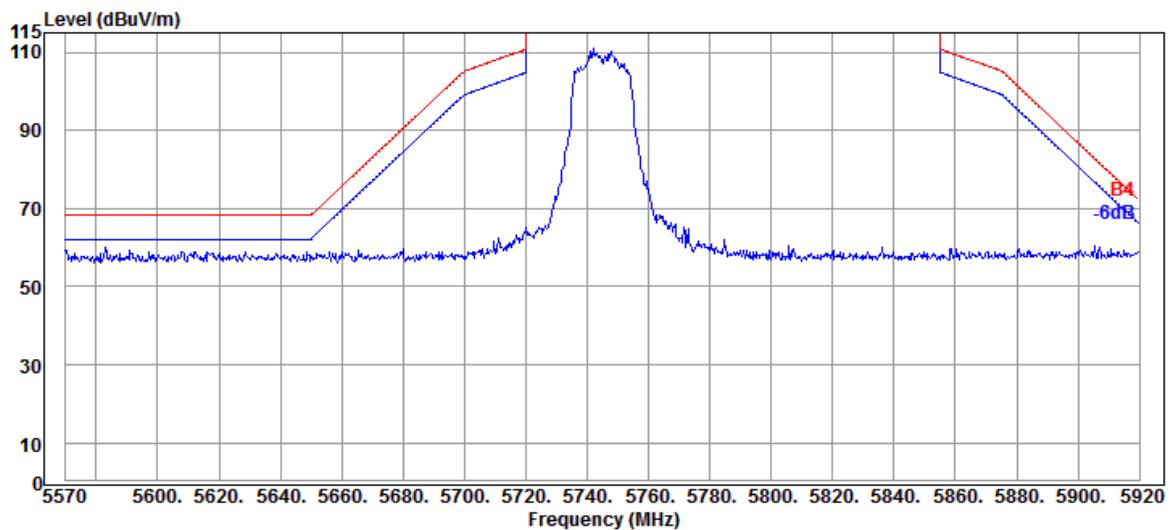


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

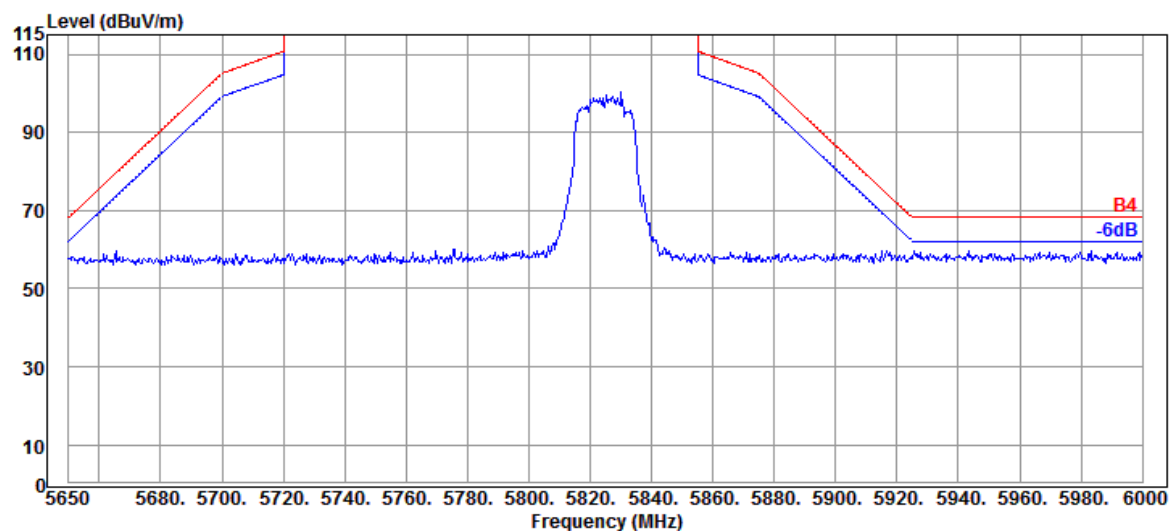


Antenna at Vertical Polarization

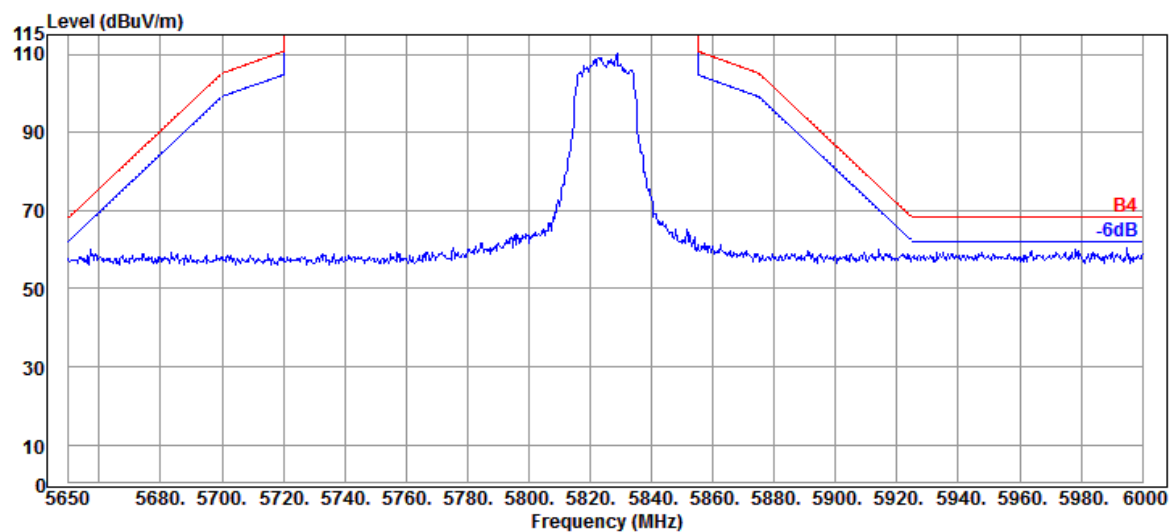

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

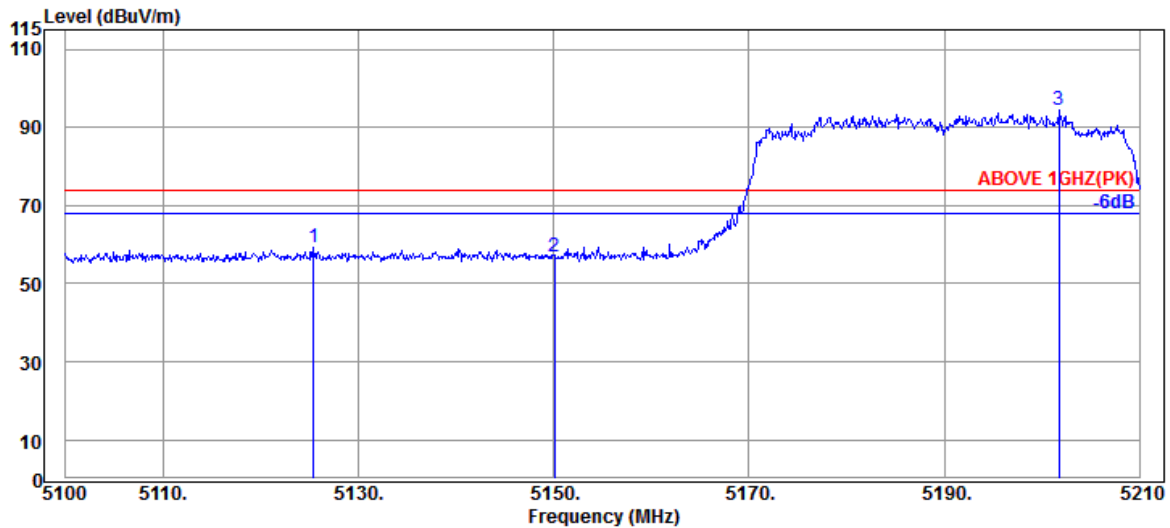

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.410	33.70	8.87	39.29	56.00	59.28	74.00	14.72	Peak
5150.050	33.70	8.88	39.29	53.68	56.97	74.00	17.03	Peak
@ 5201.750	33.72	8.92	39.28	90.94	94.30	---	---	Peak

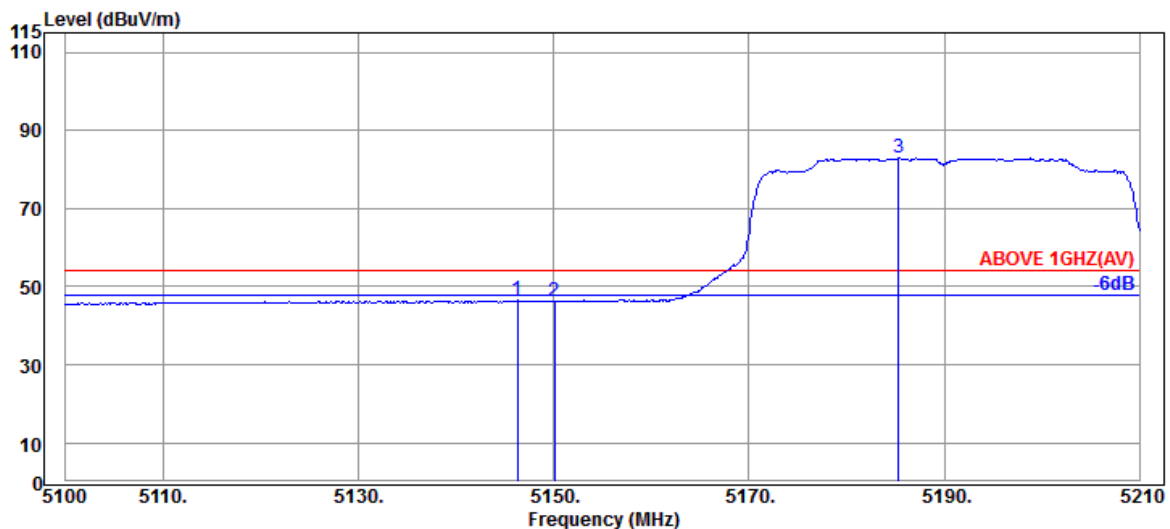

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.310	33.70	8.88	39.29	43.18	46.47	54.00	7.53	Average
5150.050	33.70	8.88	39.29	43.00	46.29	54.00	7.71	Average
@ 5185.360	33.70	8.90	39.28	79.56	82.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

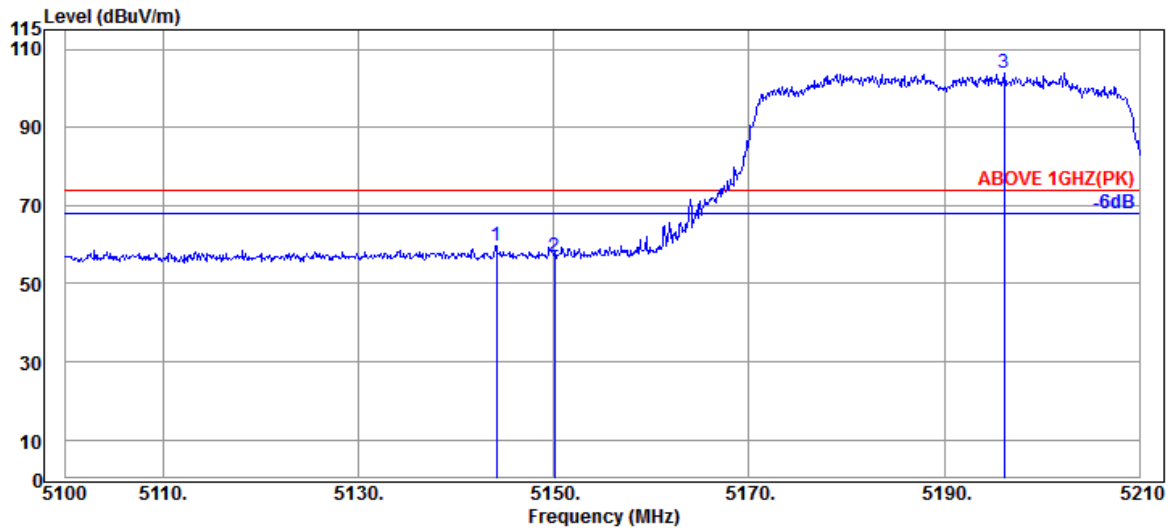

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.110	33.70	8.88	39.29	56.33	59.62	74.00	14.38	Peak
5150.050	33.70	8.88	39.29	53.57	56.86	74.00	17.14	Peak
@ 5196.140	33.70	8.91	39.28	100.53	103.86	---	---	Peak

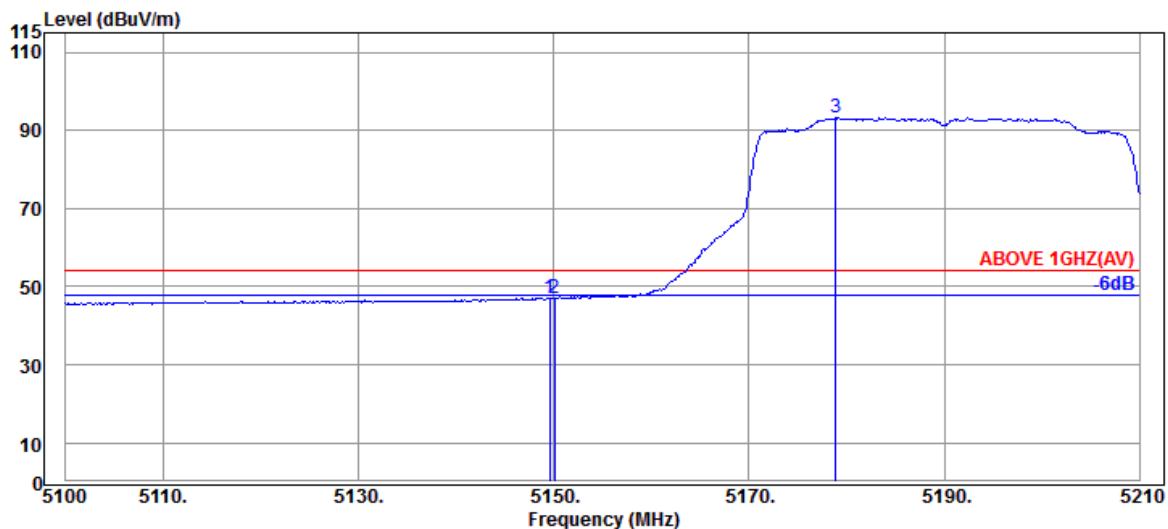

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	33.70	8.88	39.29	43.84	47.13	54.00	6.87	Average
5150.050	33.70	8.88	39.29	43.86	47.15	54.00	6.85	Average
@ 5178.870	33.70	8.90	39.28	89.94	93.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

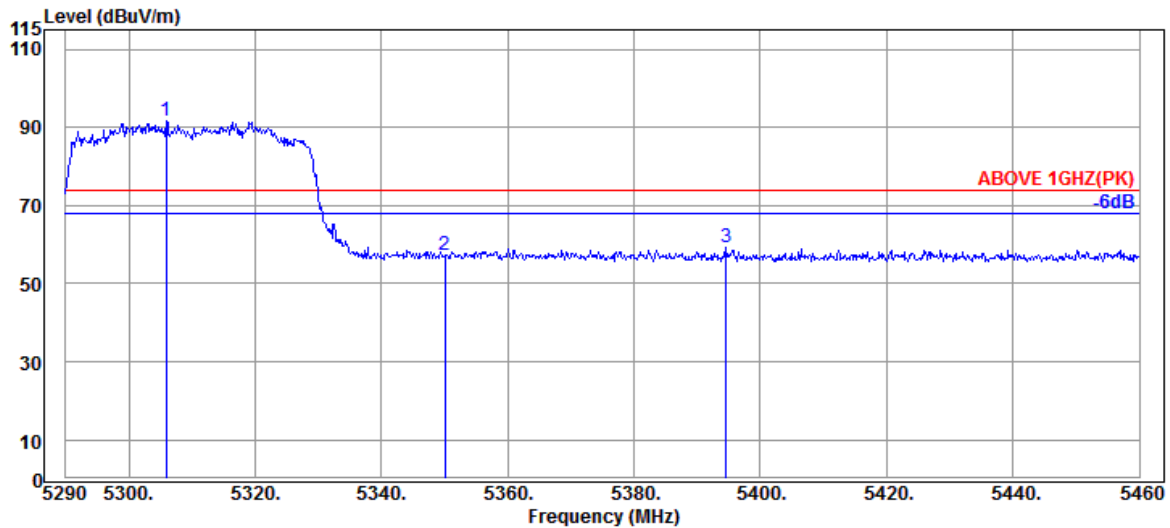

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.980	34.10	8.97	39.28	87.86	91.65	---	---	Peak
5350.010	33.90	8.99	39.27	53.77	57.39	74.00	16.61	Peak
5394.550	34.10	9.02	39.27	55.25	59.10	74.00	14.90	Peak

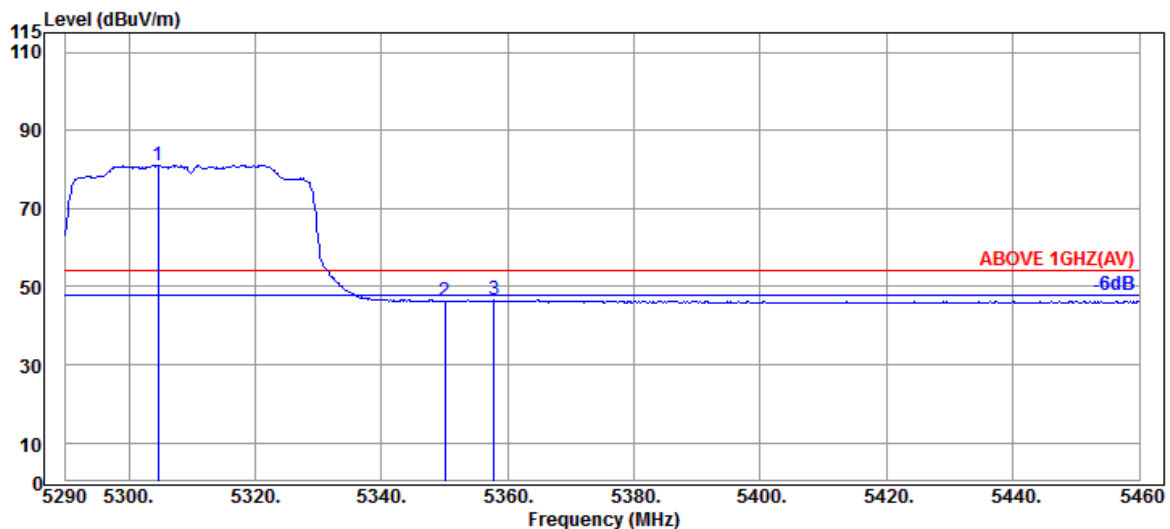

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.620	34.10	8.97	39.28	77.31	81.10	---	---	Average
5350.010	33.90	8.99	39.27	42.52	46.14	54.00	7.86	Average
5357.830	33.97	9.00	39.27	42.80	46.50	54.00	7.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

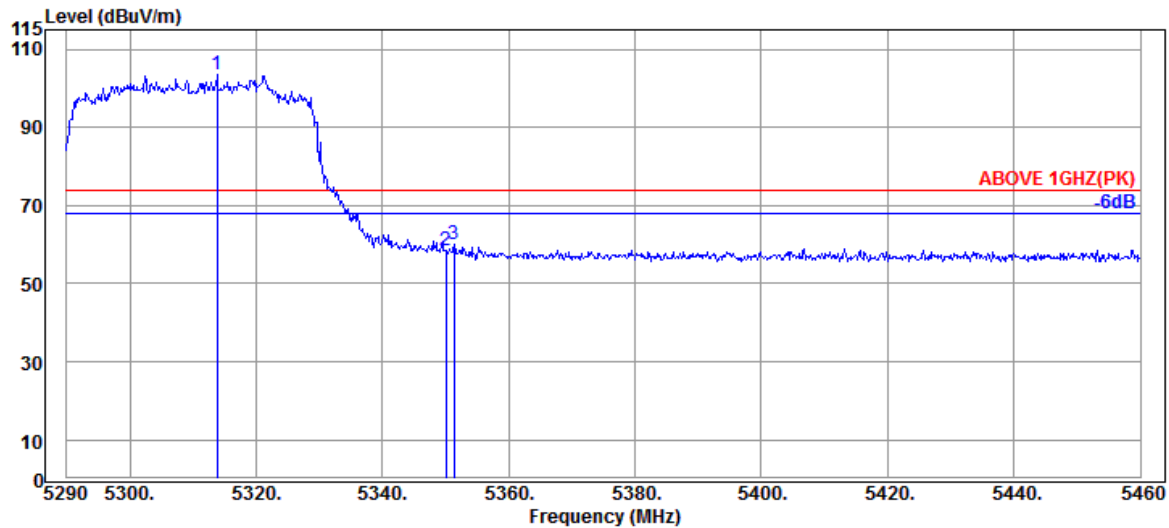

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.800	34.03	8.98	39.27	99.70	103.44	---	---	Peak
5350.010	33.90	8.99	39.27	54.80	58.42	74.00	15.58	Peak
5351.370	33.90	8.99	39.27	56.35	59.97	74.00	14.03	Peak

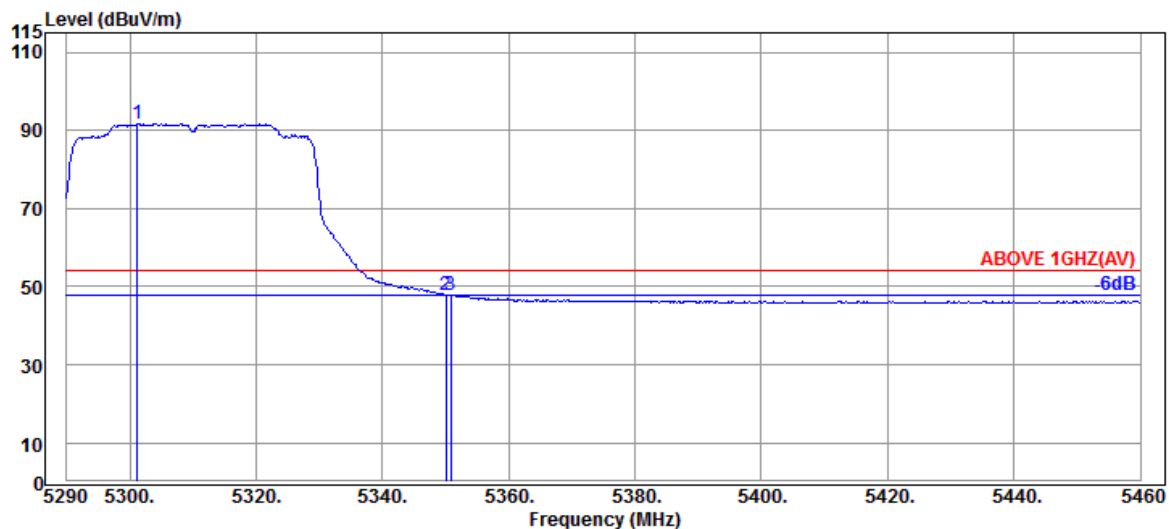


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.220	34.10	8.97	39.28	87.94	91.73	---	---	Average
5350.010	33.90	8.99	39.27	44.16	47.78	54.00	6.22	Average
5350.860	33.90	8.99	39.27	44.29	47.91	54.00	6.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

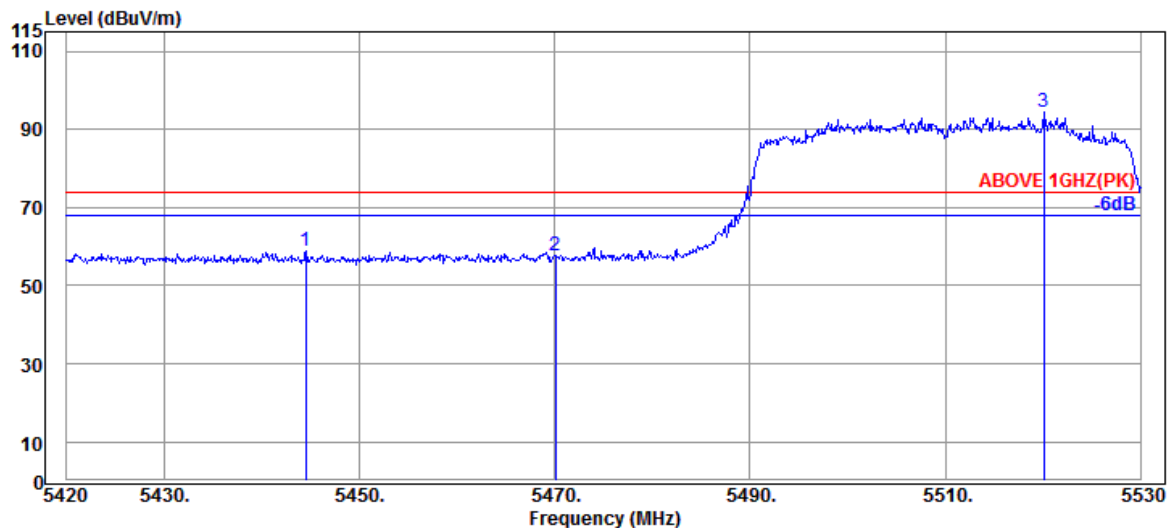

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5444.530	34.17	9.04	39.26	54.84	58.79	74.00	15.21	Peak
5470.050	34.17	9.06	39.26	53.65	57.62	74.00	16.38	Peak
@ 5520.100	34.10	9.09	39.26	90.37	94.30	---	---	Peak

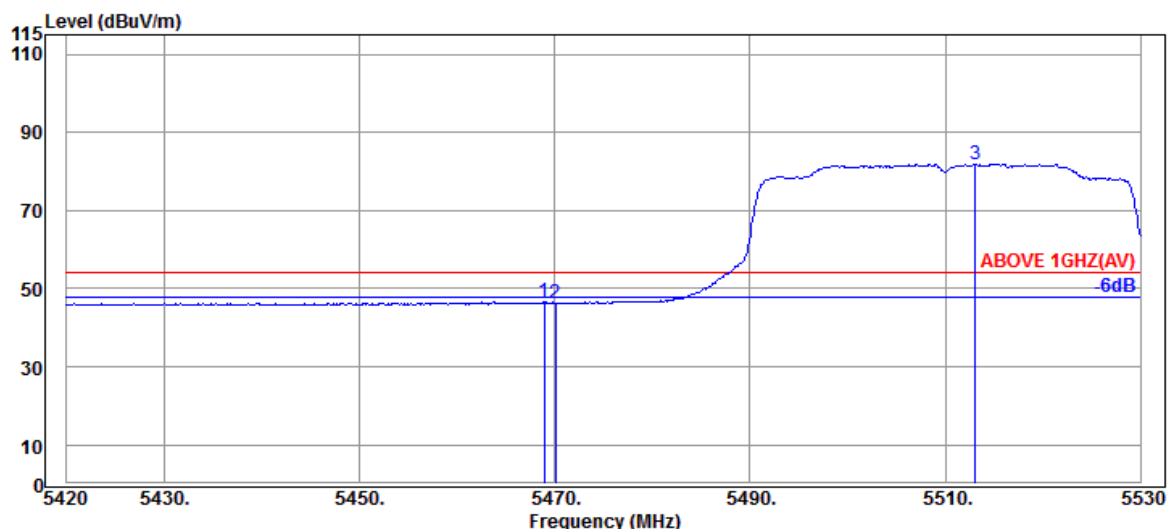

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.950	34.17	9.06	39.26	42.59	46.56	54.00	7.44	Average
5470.050	34.17	9.06	39.26	42.22	46.19	54.00	7.81	Average
@ 5513.060	34.10	9.09	39.26	77.89	81.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

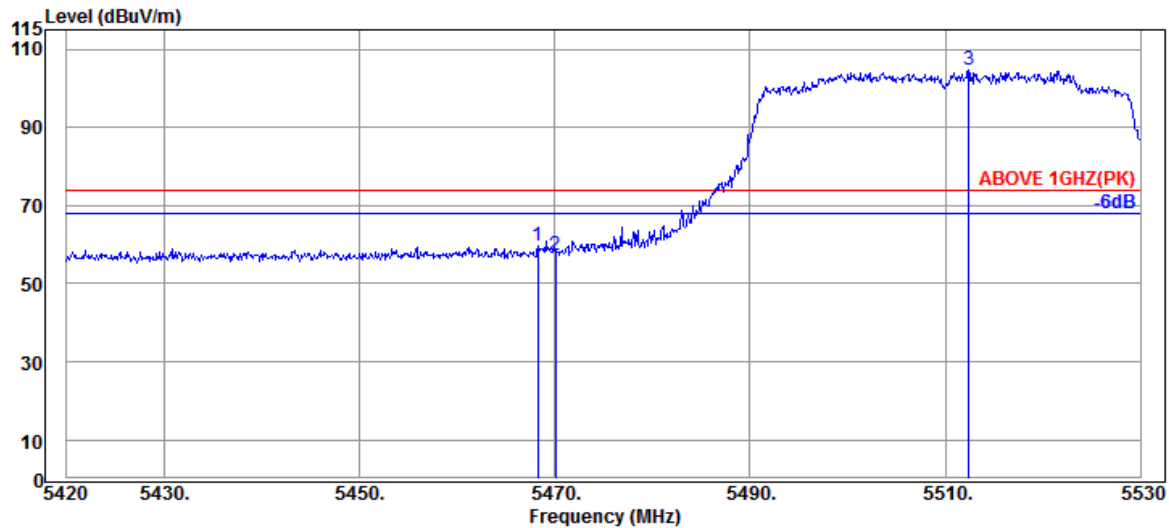

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	34.17	9.06	39.26	55.86	59.83	74.00	14.17	Peak
5470.050	34.17	9.06	39.26	53.27	57.24	74.00	16.76	Peak
@ 5512.400	34.10	9.09	39.26	100.67	104.60	---	---	Peak

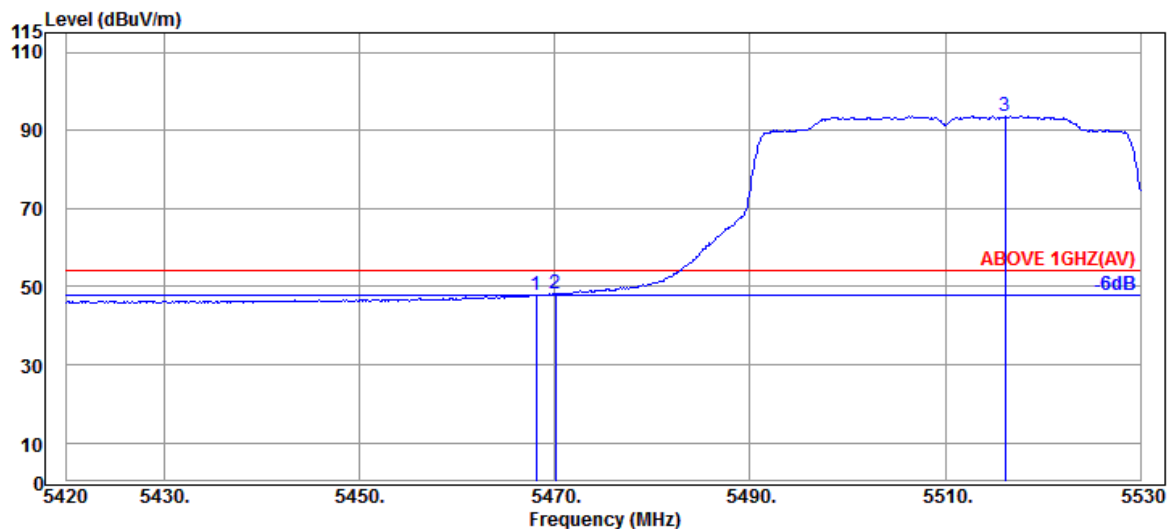

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.070	34.17	9.06	39.26	43.97	47.94	54.00	6.06	Average
5470.050	34.17	9.06	39.26	44.20	48.17	54.00	5.83	Average
@ 5516.140	34.10	9.09	39.26	89.71	93.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

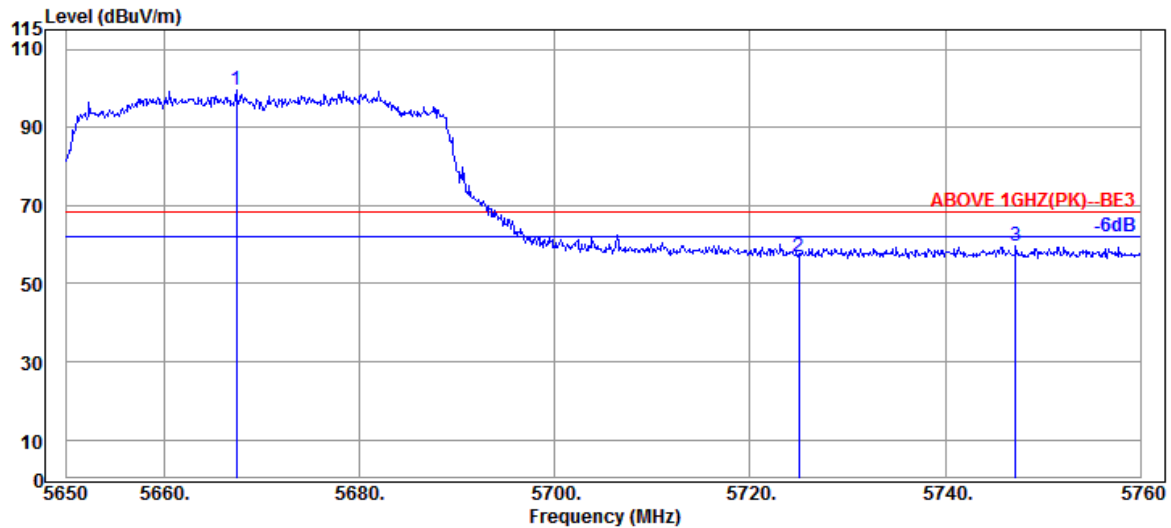

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.380	33.93	9.16	39.29	95.68	99.48	---	---	Peak
5725.020	33.80	9.20	39.30	53.40	57.10	68.20	11.10	Peak
5747.240	33.80	9.20	39.31	55.92	59.61	68.20	8.59	Peak

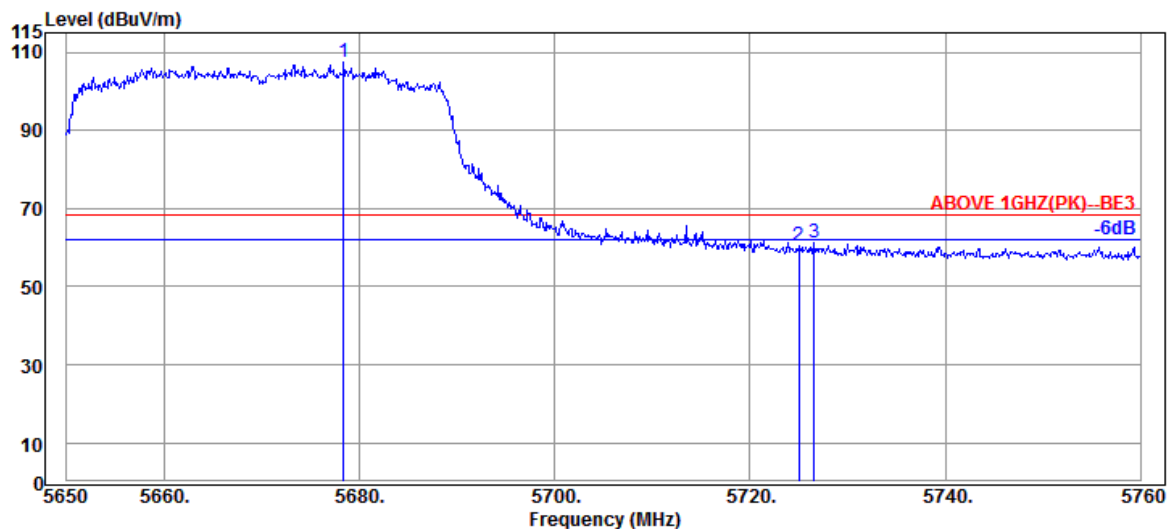

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.380	33.87	9.17	39.30	103.70	107.44	---	---	Peak
5725.020	33.80	9.20	39.30	56.64	60.34	68.20	7.86	Peak
5726.560	33.80	9.20	39.31	57.47	61.16	68.20	7.04	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

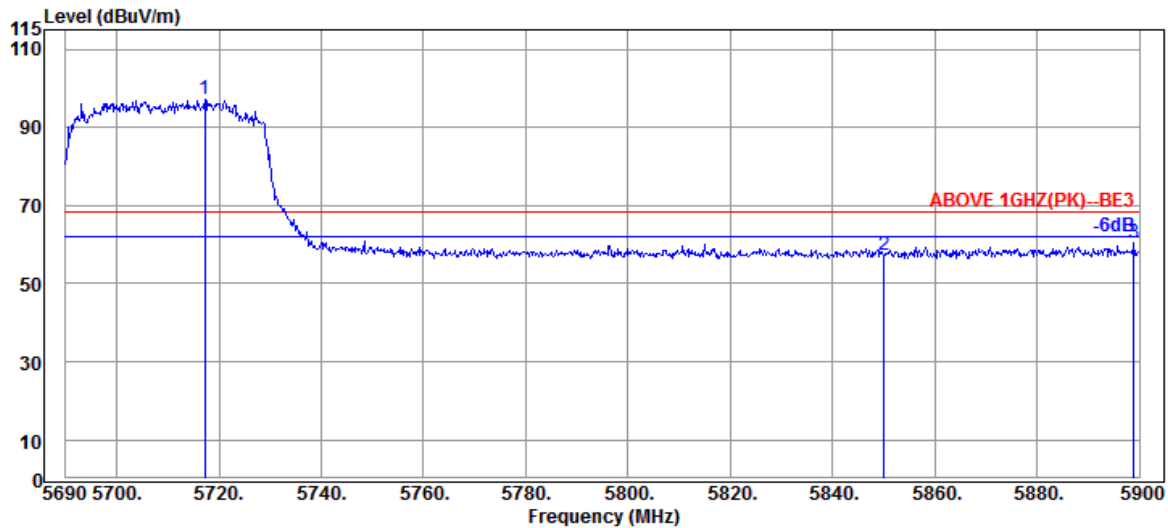

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.300	33.80	9.19	39.30	93.55	97.24	---	---	Peak
5850.020	34.10	9.25	39.33	53.44	57.46	68.20	10.74	Peak
5898.950	34.10	9.28	39.34	56.27	60.31	68.20	7.89	Peak

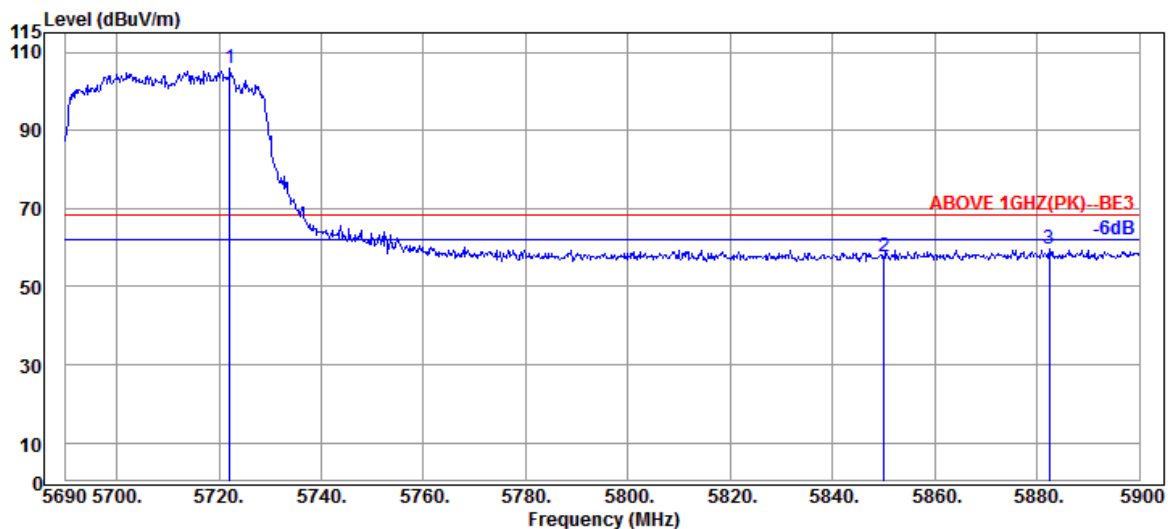

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.130	33.80	9.20	39.30	102.07	105.77	---	---	Peak
5850.020	34.10	9.25	39.33	53.87	57.89	68.20	10.31	Peak
5882.360	34.10	9.27	39.34	55.46	59.49	68.20	8.71	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

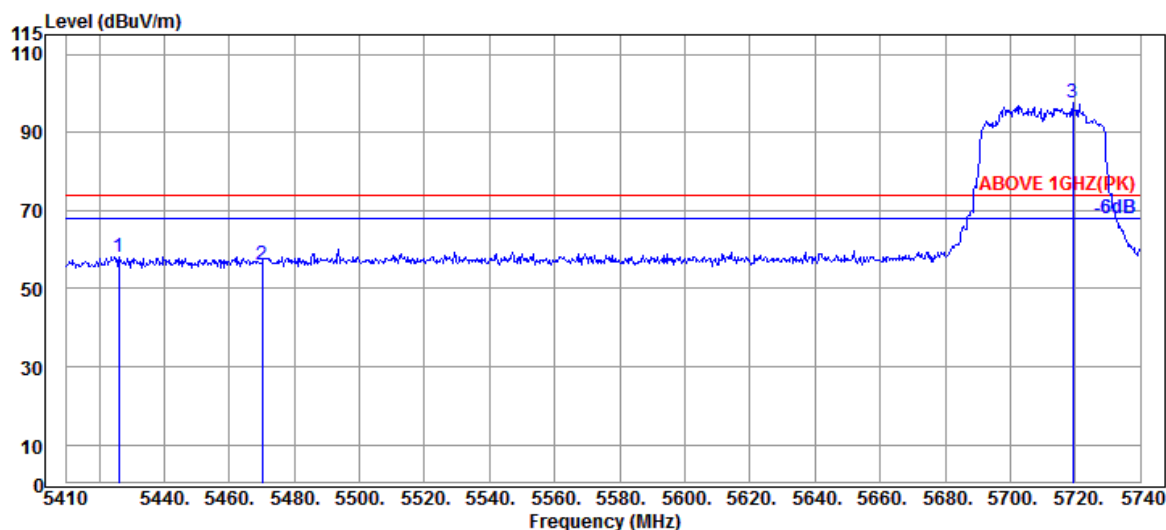

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.170	34.15	9.04	39.27	54.23	58.15	74.00	15.85	Peak
5470.060	34.17	9.06	39.26	52.07	56.04	74.00	17.96	Peak
@ 5719.210	33.80	9.19	39.30	93.97	97.66	---	---	Peak

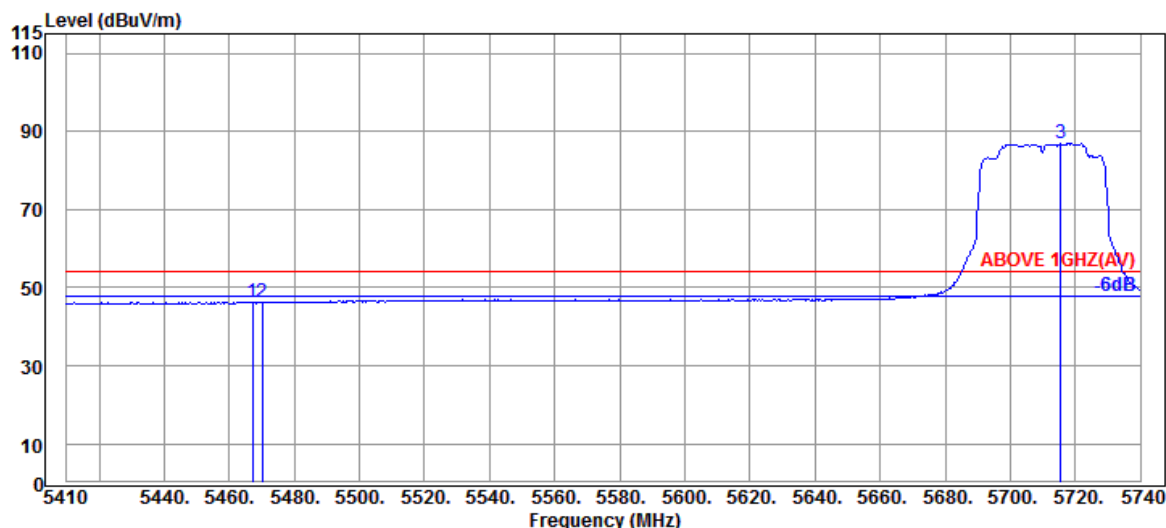

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.090	34.17	9.06	39.26	42.34	46.31	54.00	7.69	Average
5470.060	34.17	9.06	39.26	42.32	46.29	54.00	7.71	Average
@ 5715.580	33.80	9.19	39.30	83.18	86.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

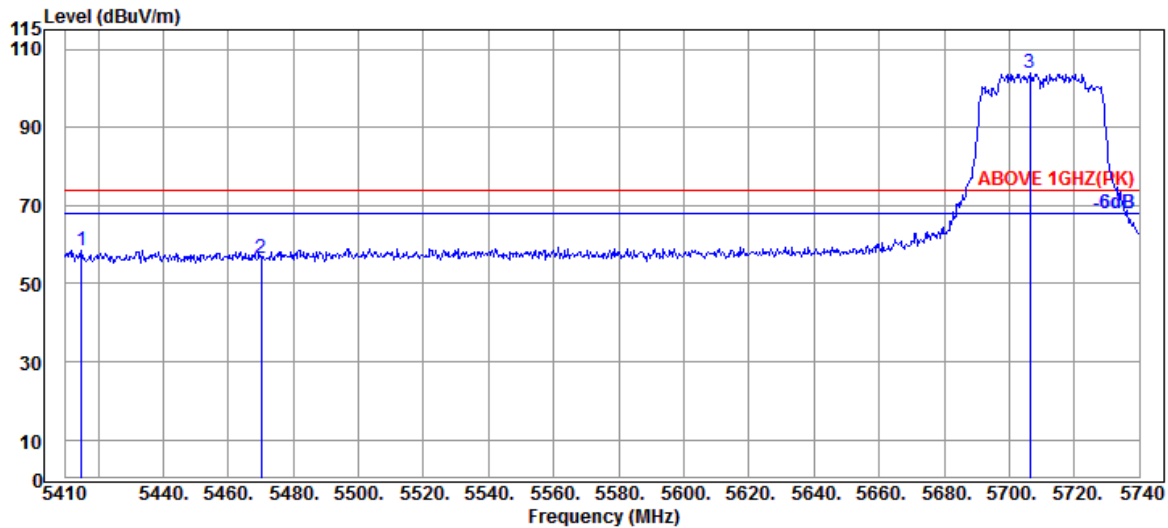

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5414.950	34.12	9.03	39.27	54.74	58.62	74.00	15.38	Peak
5470.060	34.17	9.06	39.26	52.58	56.55	74.00	17.45	Peak
@ 5706.340	33.80	9.19	39.30	100.35	104.04	---	---	Peak

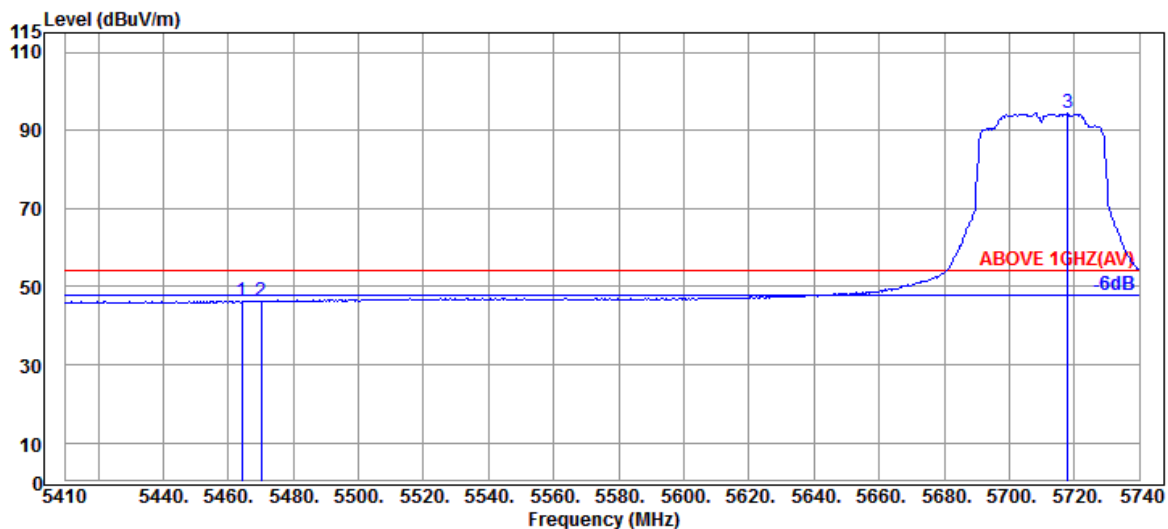

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.120	34.17	9.06	39.26	42.32	46.29	54.00	7.71	Average
5470.060	34.17	9.06	39.26	42.14	46.11	54.00	7.89	Average
@ 5717.890	33.80	9.19	39.30	90.76	94.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

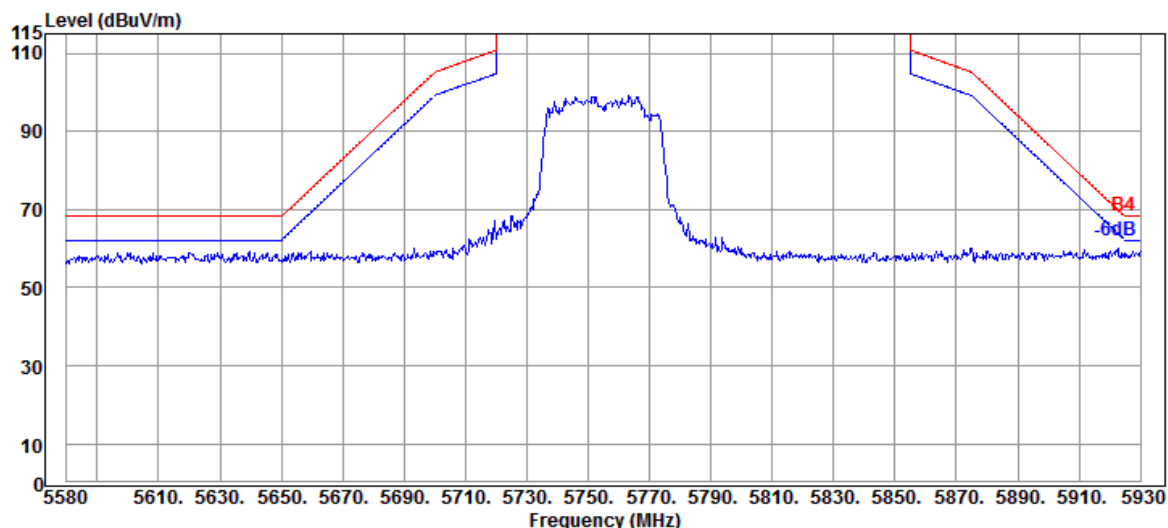

Antenna at Vertical Polarization

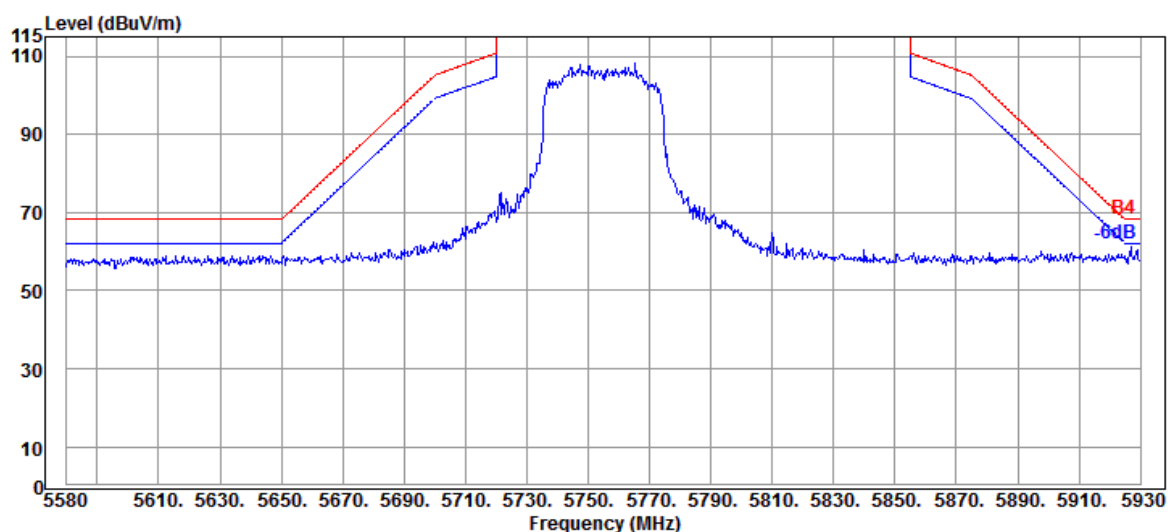


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

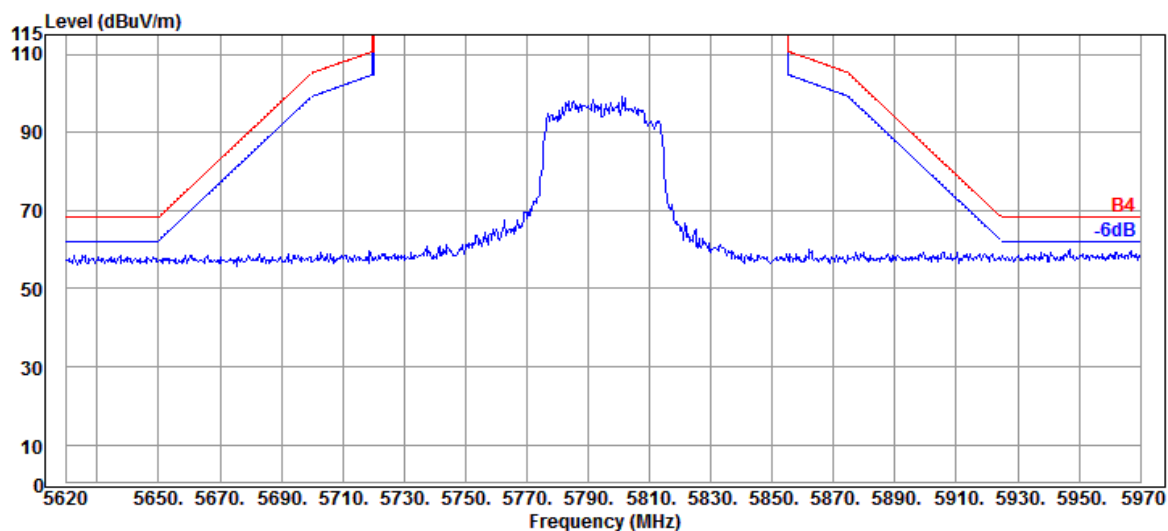

Antenna at Vertical Polarization

