



|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1          |
|      |               | Frequency  | TX 5210MHz |

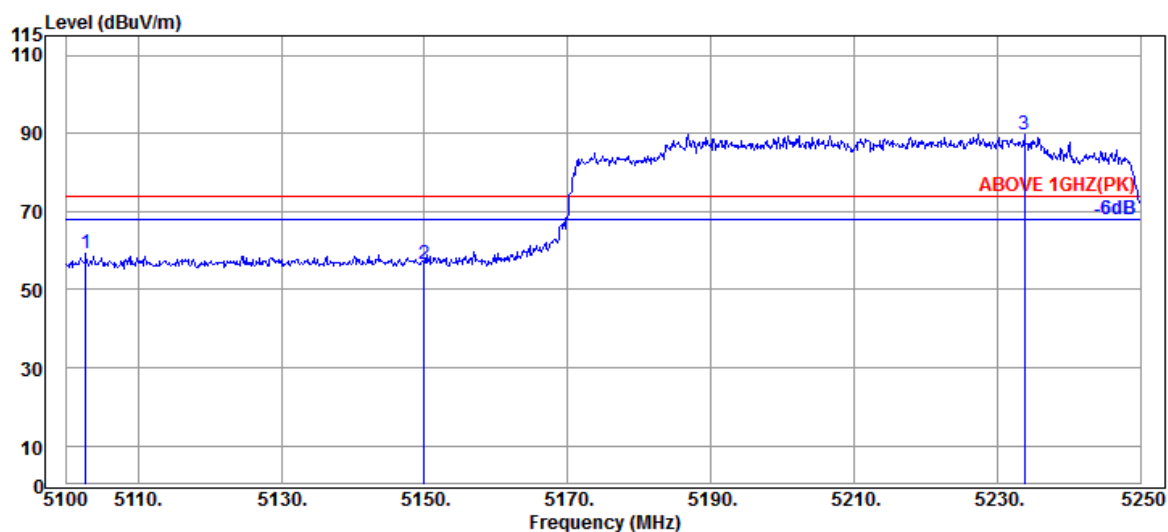

### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5102.700                 | 33.70                 | 8.86            | 39.29                  | 55.96             | 59.23                   | 74.00           | 14.77       | Peak     |
| 5149.950                 | 33.70                 | 8.88            | 39.29                  | 53.35             | 56.64                   | 74.00           | 17.36       | Peak     |
| @ 5233.800               | 33.78                 | 8.93            | 39.28                  | 86.21             | 89.64                   | ---             | ---         | Peak     |

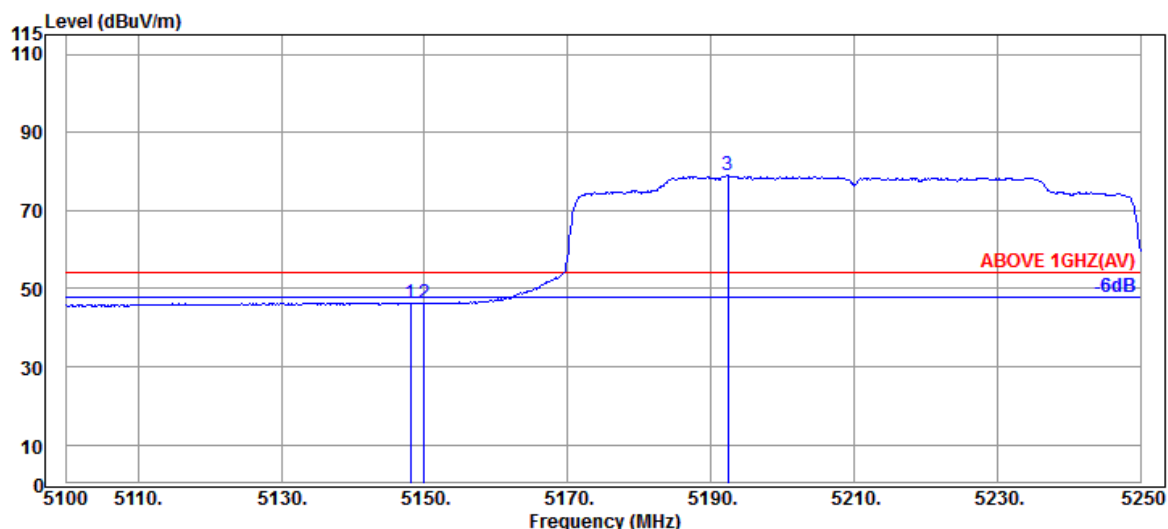


### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.000                 | 33.70                 | 8.88            | 39.29                  | 43.09             | 46.38                   | 54.00           | 7.62        | Average  |
| 5149.950                 | 33.70                 | 8.88            | 39.29                  | 42.94             | 46.23                   | 54.00           | 7.77        | Average  |
| @ 5192.400               | 33.70                 | 8.91            | 39.28                  | 75.68             | 79.01                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1          |
|      |               | Frequency  | TX 5210MHz |

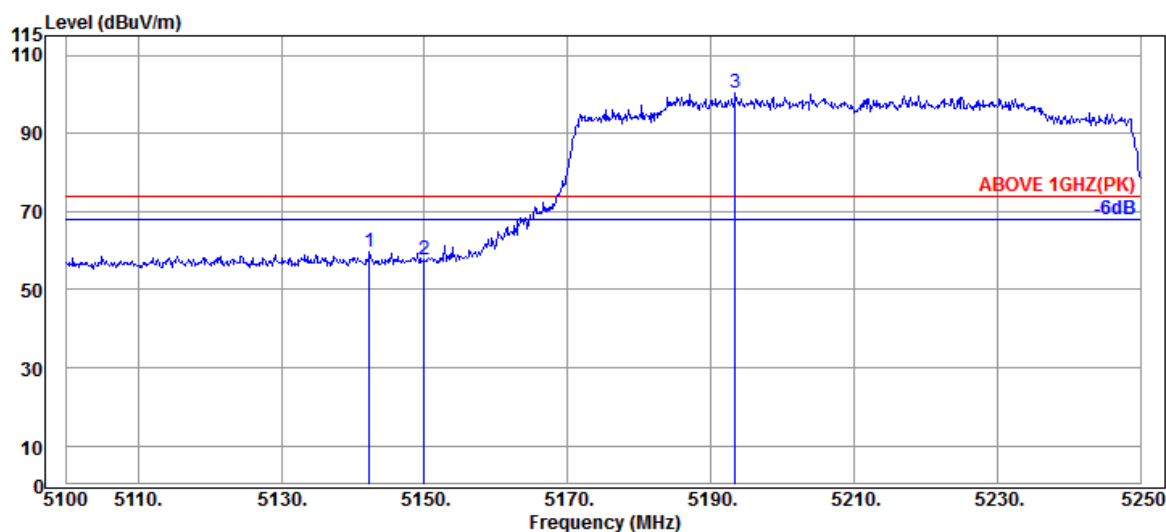

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5142.300                 | 33.70                 | 8.88            | 39.29            | 56.19             | 59.48                   | 74.00           | 14.52       | Peak     |
| 5149.950                 | 33.70                 | 8.88            | 39.29            | 54.36             | 57.65                   | 74.00           | 16.35       | Peak     |
| @ 5193.450               | 33.70                 | 8.91            | 39.28            | 97.00             | 100.33                  | ---             | ---         | Peak     |

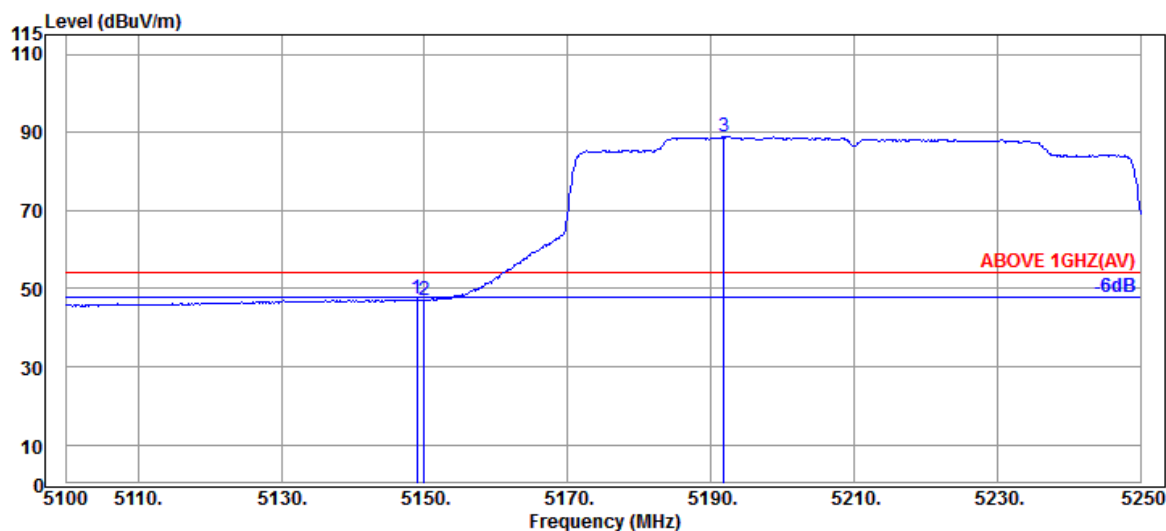

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.900                 | 33.70                 | 8.88            | 39.29            | 44.03             | 47.32                   | 54.00           | 6.68        | Average  |
| 5149.950                 | 33.70                 | 8.88            | 39.29            | 43.62             | 46.91                   | 54.00           | 7.09        | Average  |
| @ 5191.800               | 33.70                 | 8.91            | 39.28            | 85.71             | 89.04                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5290MHz |

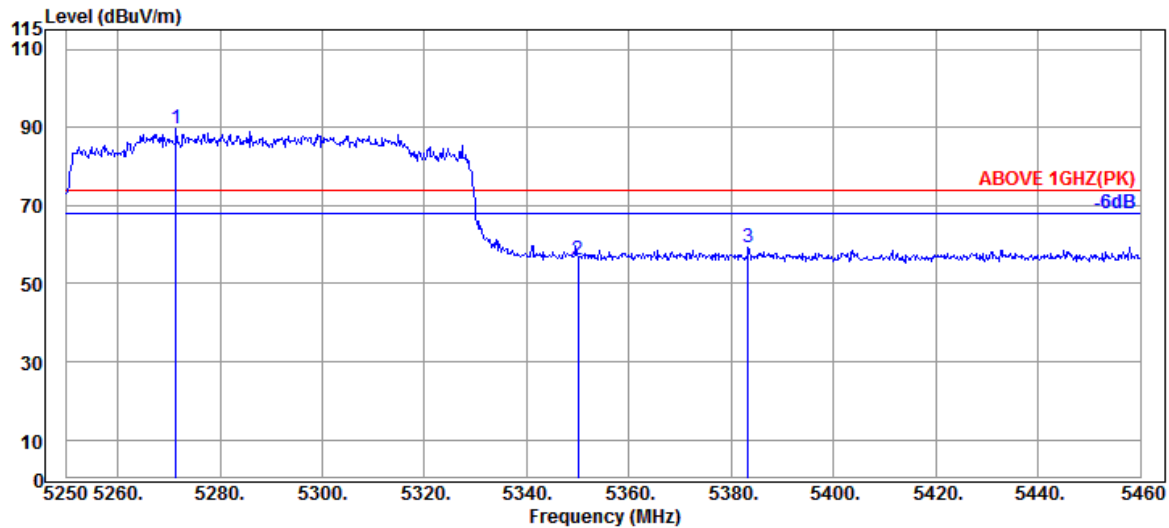

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5271.420               | 33.90                 | 8.95            | 39.28            | 85.99             | 89.56                   | ---             | ---         | Peak     |
| 5349.960                 | 33.90                 | 8.99            | 39.27            | 52.56             | 56.18                   | 74.00           | 17.82       | Peak     |
| 5383.350                 | 34.03                 | 9.01            | 39.27            | 55.64             | 59.41                   | 74.00           | 14.59       | Peak     |

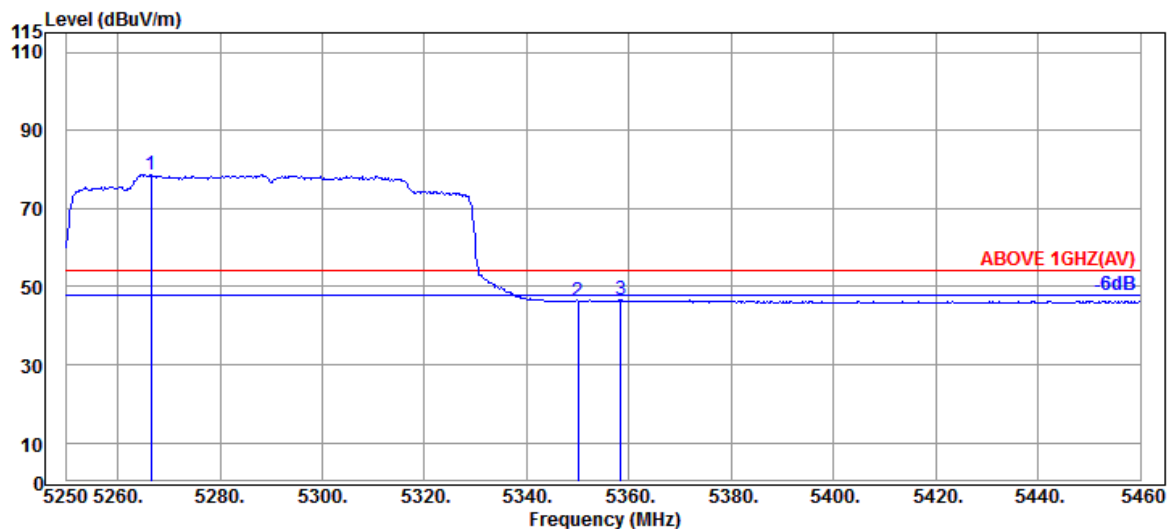

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5266.590               | 33.90                 | 8.95            | 39.28            | 75.14             | 78.71                   | ---             | ---         | Average  |
| 5349.960                 | 33.90                 | 8.99            | 39.27            | 42.56             | 46.18                   | 54.00           | 7.82        | Average  |
| 5358.360                 | 33.97                 | 9.00            | 39.27            | 42.97             | 46.67                   | 54.00           | 7.33        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5290MHz |

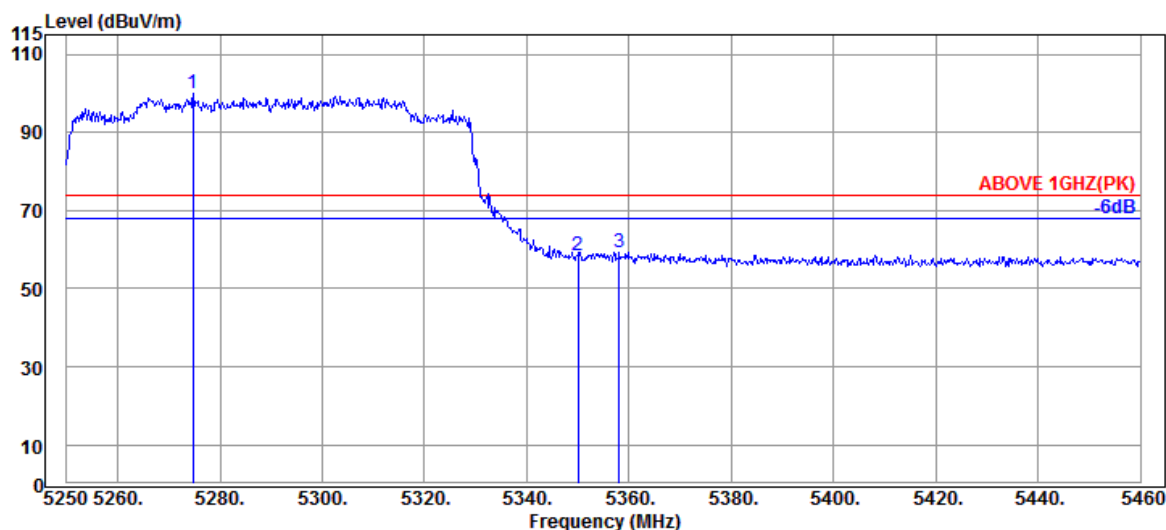

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5274.780               | 33.90                 | 8.95            | 39.28                  | 96.38             | 99.95                   | ---             | ---         | Peak     |
| 5349.960                 | 33.90                 | 8.99            | 39.27                  | 54.76             | 58.38                   | 74.00           | 15.62       | Peak     |
| 5358.150                 | 33.97                 | 9.00            | 39.27                  | 55.76             | 59.46                   | 74.00           | 14.54       | Peak     |

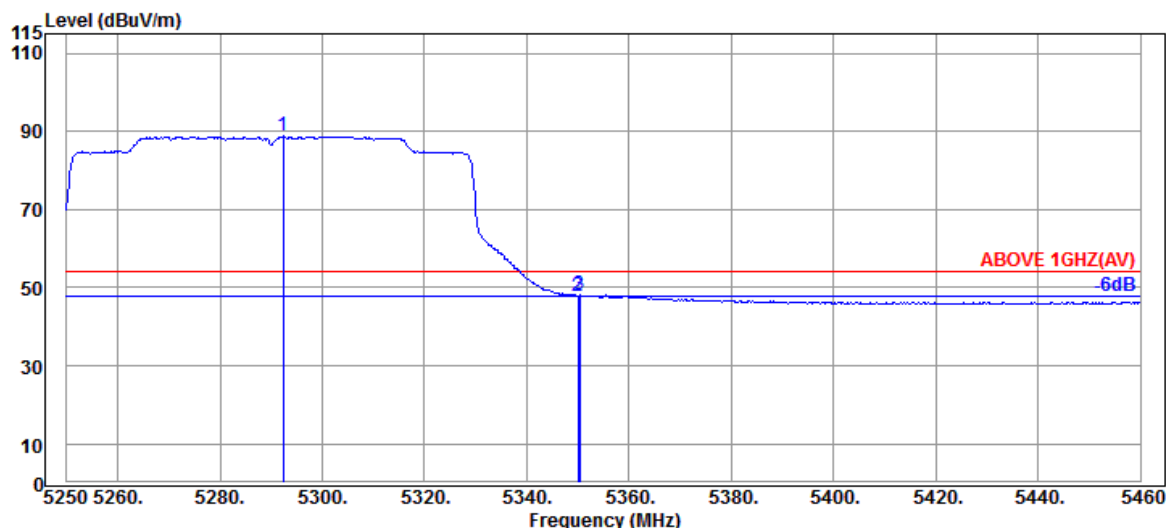


## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5292.420               | 34.00                 | 8.96            | 39.28                  | 85.05             | 88.73                   | ---             | ---         | Average  |
| 5349.960                 | 33.90                 | 8.99            | 39.27                  | 44.39             | 48.01                   | 54.00           | 5.99        | Average  |
| 5350.380                 | 33.90                 | 8.99            | 39.27                  | 44.43             | 48.05                   | 54.00           | 5.95        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5530MHz |

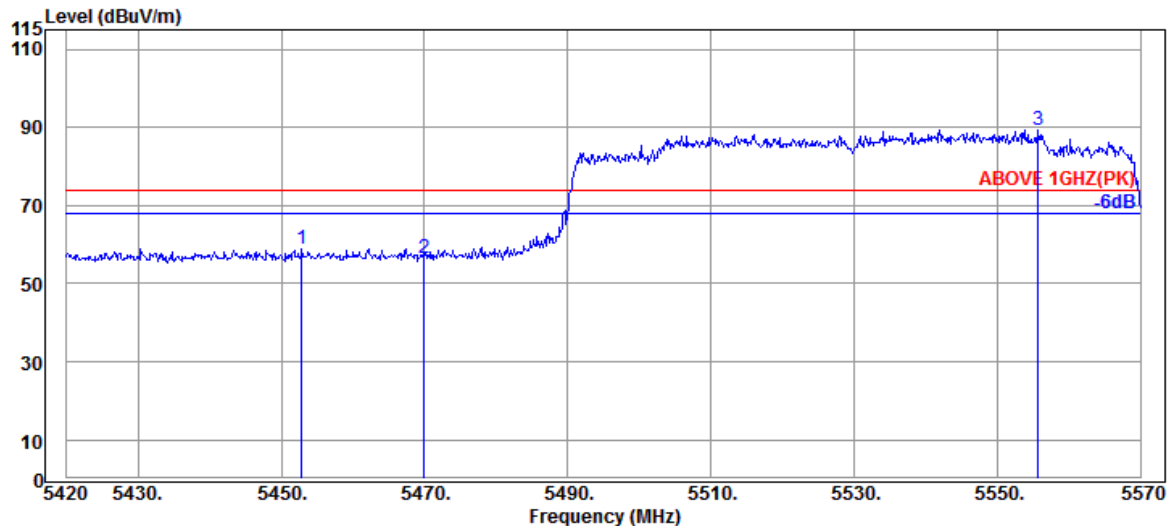

### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5452.850                 | 34.20                 | 9.05            | 39.26                  | 54.95             | 58.94                   | 74.00           | 15.06       | Peak     |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 52.65             | 56.62                   | 74.00           | 17.38       | Peak     |
| @ 5555.750               | 34.10                 | 9.10            | 39.27                  | 85.31             | 89.24                   | ---             | ---         | Peak     |

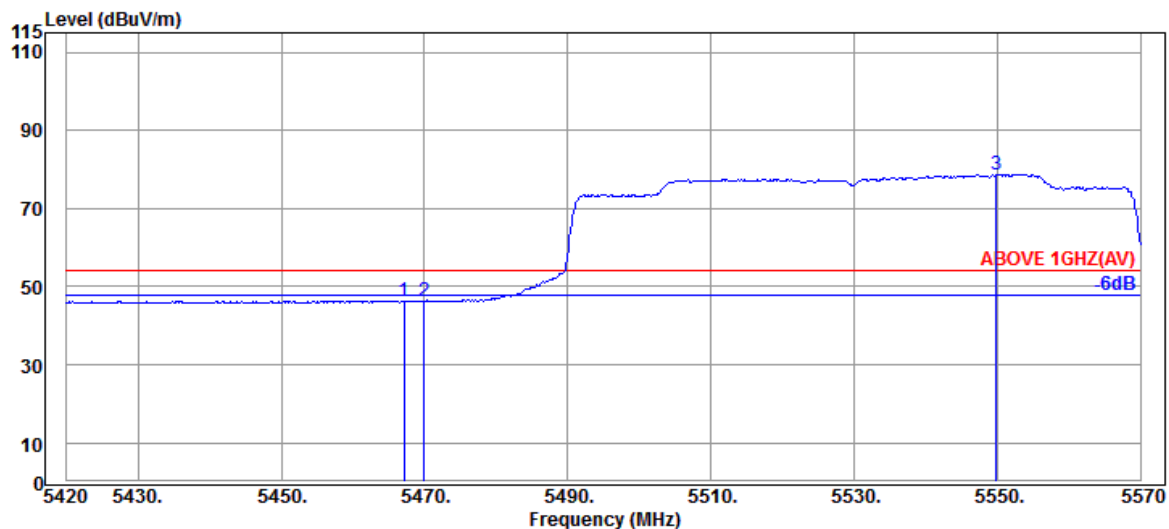


### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.100                 | 34.17                 | 9.06            | 39.26                  | 42.38             | 46.35                   | 54.00           | 7.65        | Average  |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 42.28             | 46.25                   | 54.00           | 7.75        | Average  |
| @ 5549.900               | 34.10                 | 9.10            | 39.27                  | 74.91             | 78.84                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5530MHz |

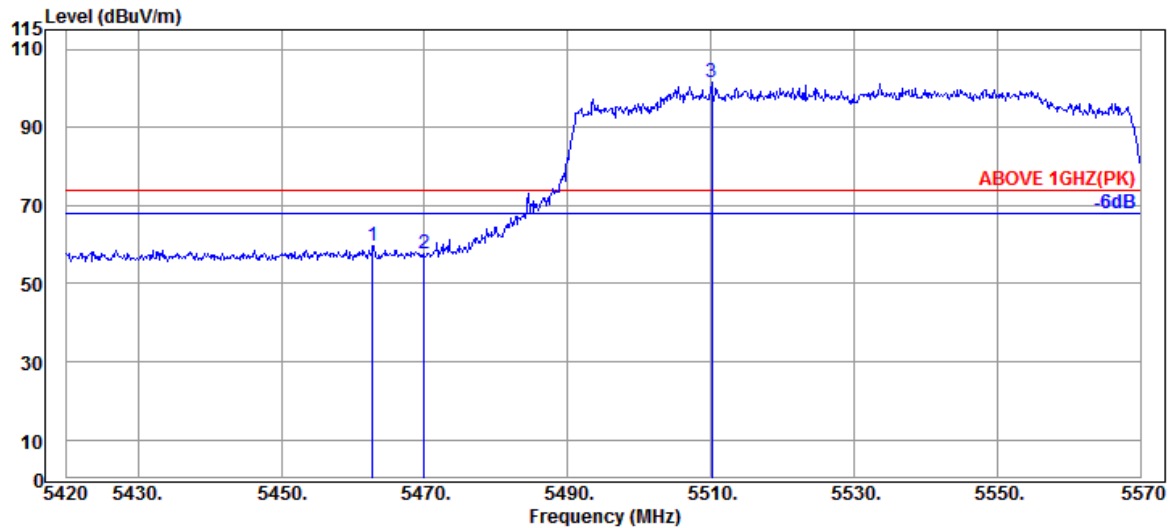

### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5462.750                 | 34.20                 | 9.05            | 39.26                  | 55.50             | 59.49                   | 74.00           | 14.51       | Peak     |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 53.69             | 57.66                   | 74.00           | 16.34       | Peak     |
| @ 5510.150               | 34.10                 | 9.08            | 39.26                  | 97.45             | 101.37                  | ---             | ---         | Peak     |

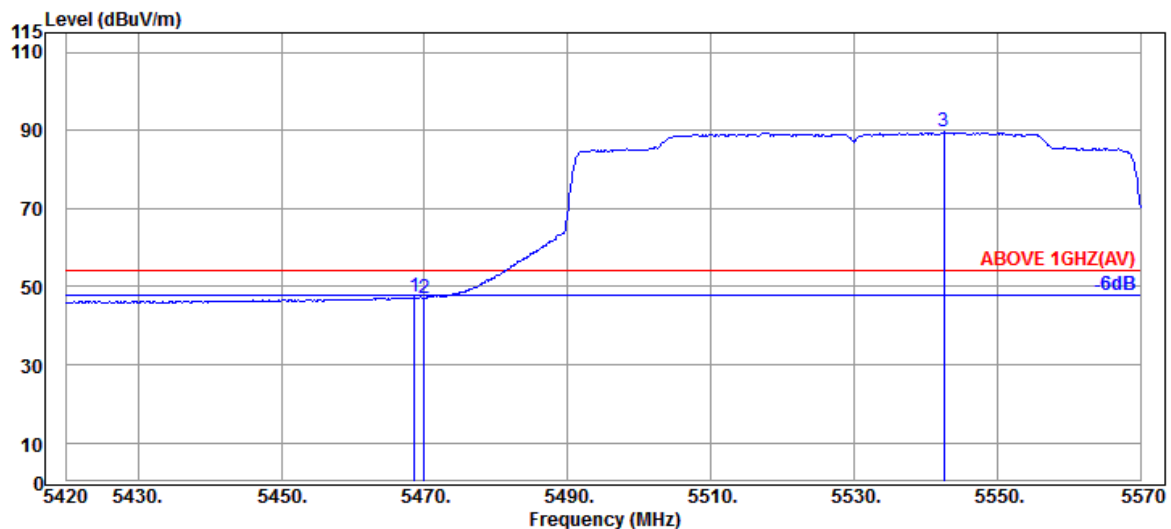

### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.600                 | 34.17                 | 9.06            | 39.26                  | 43.33             | 47.30                   | 54.00           | 6.70        | Average  |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 43.24             | 47.21                   | 54.00           | 6.79        | Average  |
| @ 5542.550               | 34.10                 | 9.09            | 39.27                  | 85.64             | 89.56                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5610MHz |

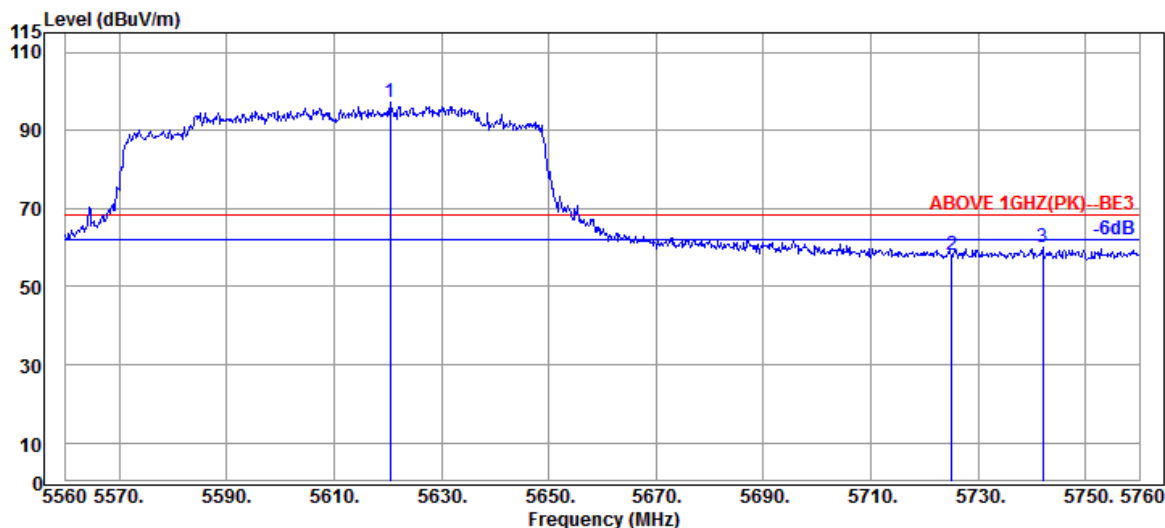

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5620.400               | 34.00                 | 9.14            | 39.29                  | 93.26             | 97.11                   | ---             | ---         | Peak     |
| 5725.000                 | 33.80                 | 9.20            | 39.30                  | 54.46             | 58.16                   | 68.20           | 10.04       | Peak     |
| 5742.000                 | 33.80                 | 9.20            | 39.31                  | 56.33             | 60.02                   | 68.20           | 8.18        | Peak     |

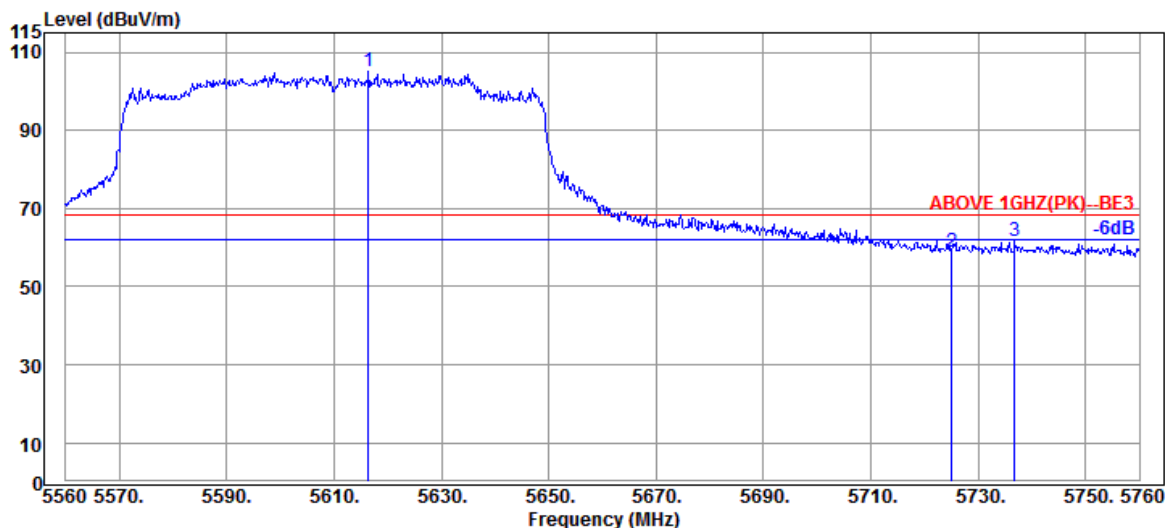

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5616.400               | 34.00                 | 9.14            | 39.29                  | 101.30            | 105.15                  | ---             | ---         | Peak     |
| 5725.000                 | 33.80                 | 9.20            | 39.30                  | 55.37             | 59.07                   | 68.20           | 9.13        | Peak     |
| 5736.800                 | 33.80                 | 9.20            | 39.31                  | 57.85             | 61.54                   | 68.20           | 6.66        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5690MHz |

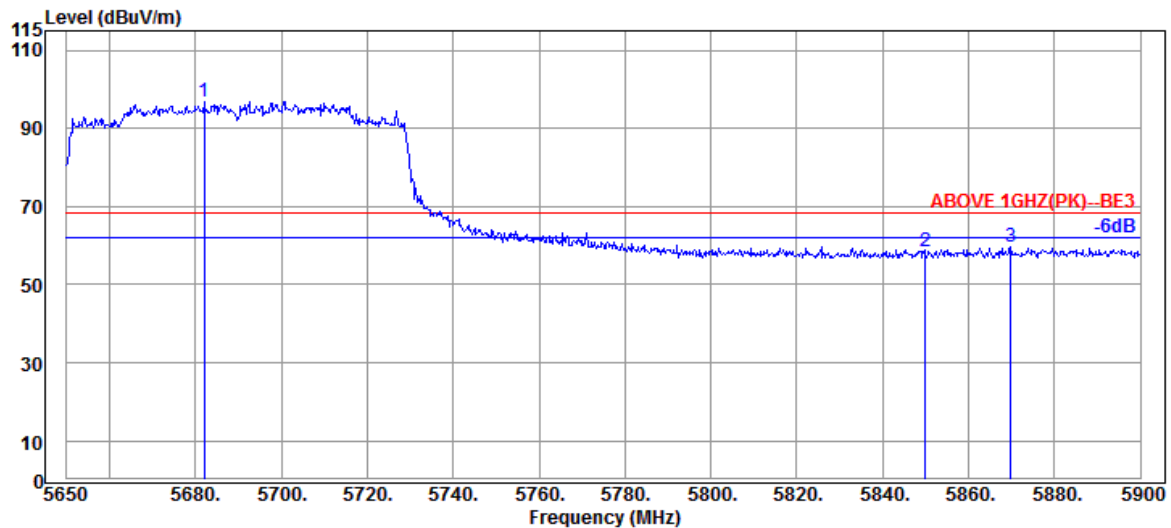

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5682.000               | 33.87                 | 9.17            | 39.30            | 93.23             | 96.97                   | ---             | ---         | Peak     |
| 5850.000                 | 34.10                 | 9.25            | 39.33            | 54.29             | 58.31                   | 68.20           | 9.89        | Peak     |
| 5869.750                 | 34.10                 | 9.26            | 39.33            | 55.57             | 59.60                   | 68.20           | 8.60        | Peak     |

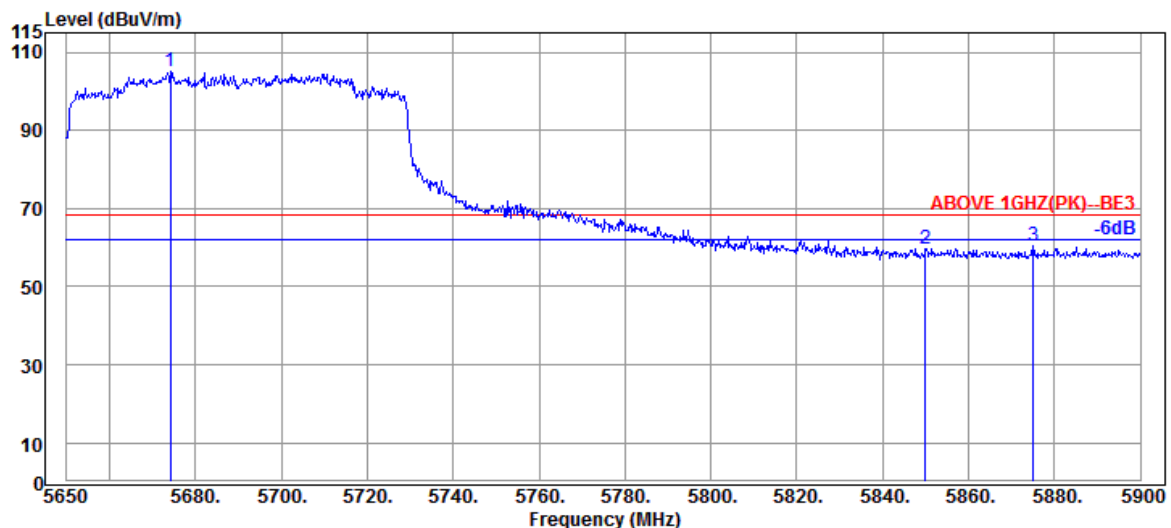

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5674.250               | 33.87                 | 9.17            | 39.30            | 101.22            | 104.96                  | ---             | ---         | Peak     |
| 5850.000                 | 34.10                 | 9.25            | 39.33            | 55.69             | 59.71                   | 68.20           | 8.49        | Peak     |
| 5875.000                 | 34.10                 | 9.27            | 39.33            | 56.46             | 60.50                   | 68.20           | 7.70        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5690MHz |

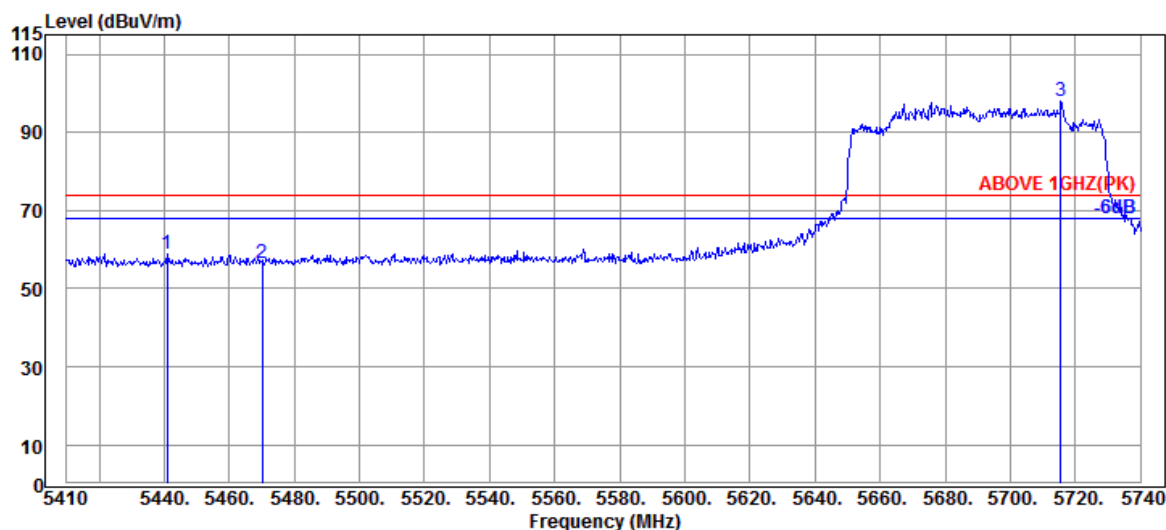

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5441.020                 | 34.17                 | 9.04            | 39.26            | 54.78             | 58.73                   | 74.00           | 15.27       | Peak     |
| 5470.060                 | 34.17                 | 9.06            | 39.26            | 52.39             | 56.36                   | 74.00           | 17.64       | Peak     |
| @ 5715.580               | 33.80                 | 9.19            | 39.30            | 94.29             | 97.98                   | ---             | ---         | Peak     |

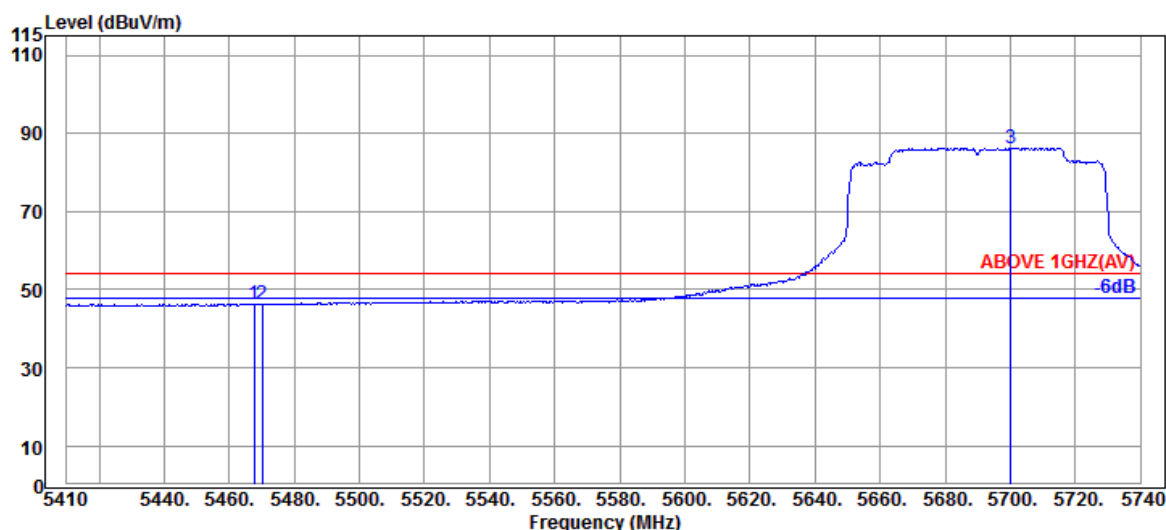

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.750                 | 34.17                 | 9.06            | 39.26            | 42.40             | 46.37                   | 54.00           | 7.63        | Average  |
| 5470.060                 | 34.17                 | 9.06            | 39.26            | 42.28             | 46.25                   | 54.00           | 7.75        | Average  |
| @ 5700.070               | 33.80                 | 9.18            | 39.30            | 82.64             | 86.32                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5690MHz |

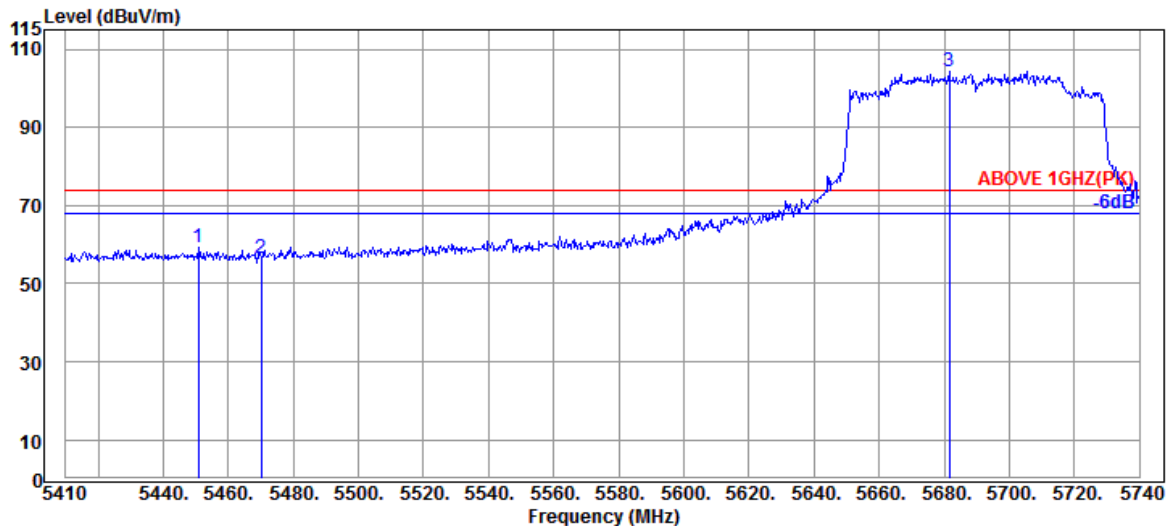

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5450.920                 | 34.20                 | 9.05            | 39.26                  | 55.19             | 59.18                   | 74.00           | 14.82       | Peak     |
| 5470.060                 | 34.17                 | 9.06            | 39.26                  | 52.54             | 56.51                   | 74.00           | 17.49       | Peak     |
| @ 5681.590               | 33.87                 | 9.17            | 39.30                  | 100.44            | 104.18                  | ---             | ---         | Peak     |

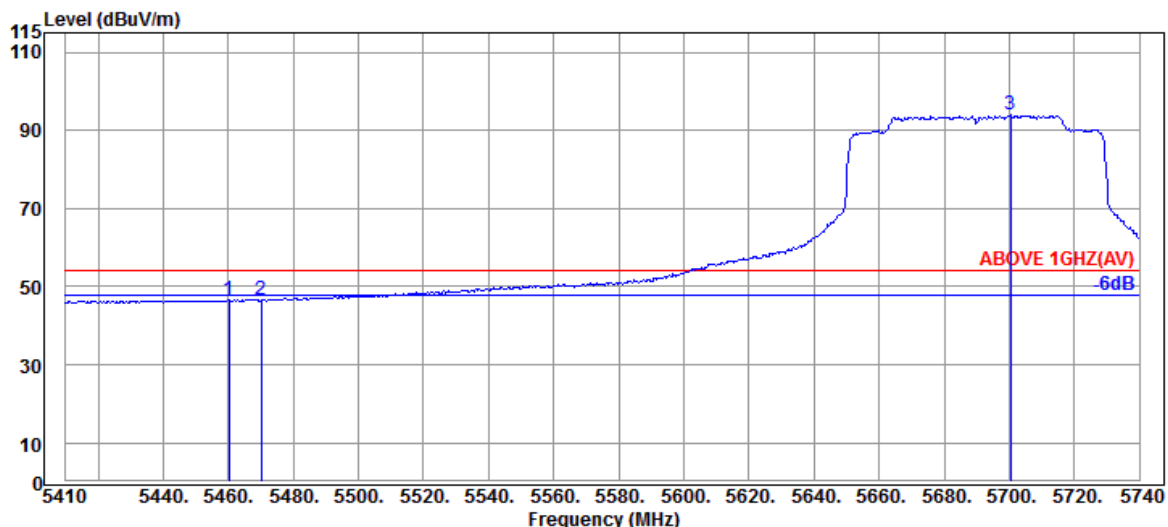

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5460.160                 | 34.20                 | 9.05            | 39.26                  | 42.66             | 46.65                   | 54.00           | 7.35        | Average  |
| 5470.060                 | 34.17                 | 9.06            | 39.26                  | 42.53             | 46.50                   | 54.00           | 7.50        | Average  |
| @ 5700.400               | 33.80                 | 9.18            | 39.30                  | 90.20             | 93.88                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ac-HE80 | U-NII Band | 3          |
|      |               | Frequency  | TX 5775MHz |

## Antenna at Horizontal Polarization

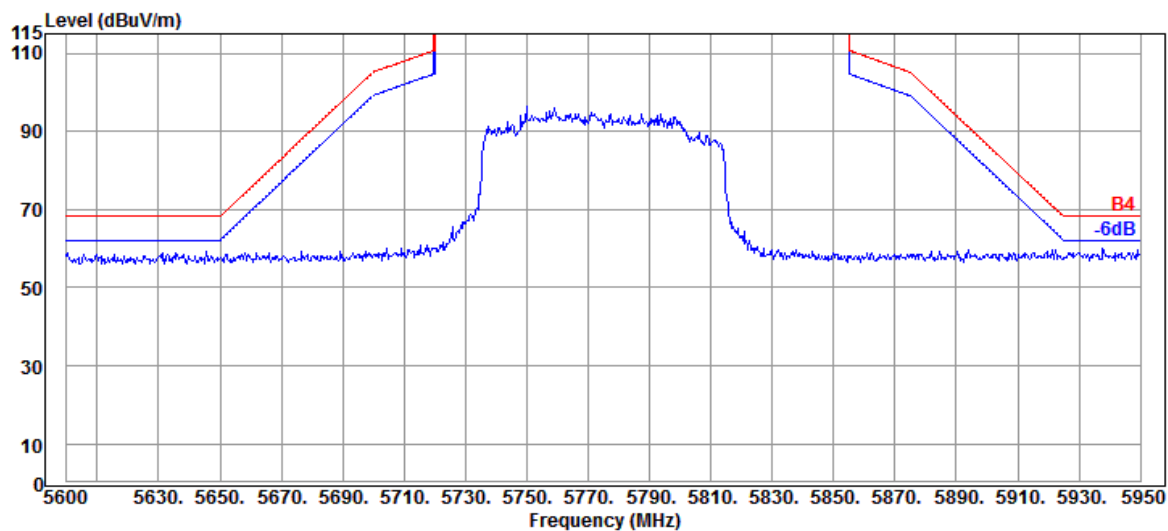


## Antenna at Vertical Polarization

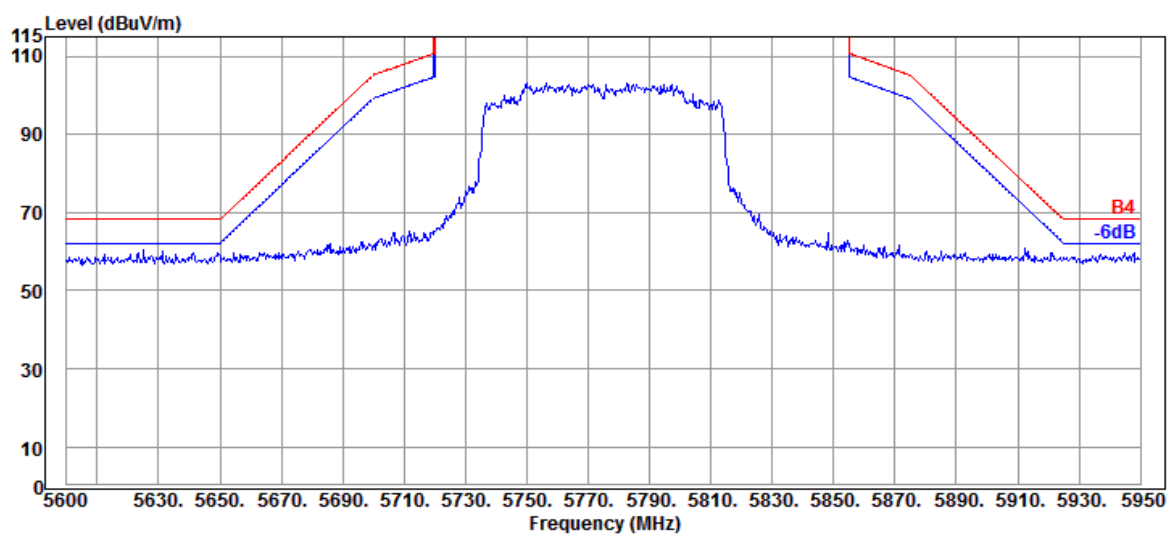

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A     |
|      |                | Frequency  | TX 5250MHz |

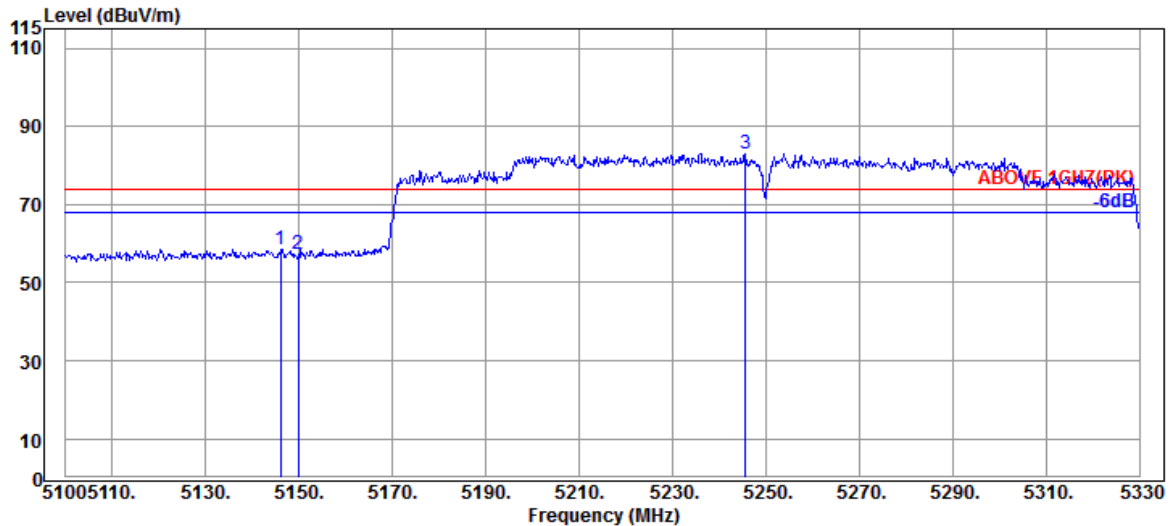

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.000                 | 33.70                 | 8.88            | 39.29                  | 55.24             | 58.53                   | 74.00           | 15.47       | Peak     |
| 5149.910                 | 33.70                 | 8.88            | 39.29                  | 54.08             | 57.37                   | 74.00           | 16.63       | Peak     |
| @ 5245.590               | 33.78                 | 8.93            | 39.28                  | 79.68             | 83.11                   | ---             | ---         | Peak     |

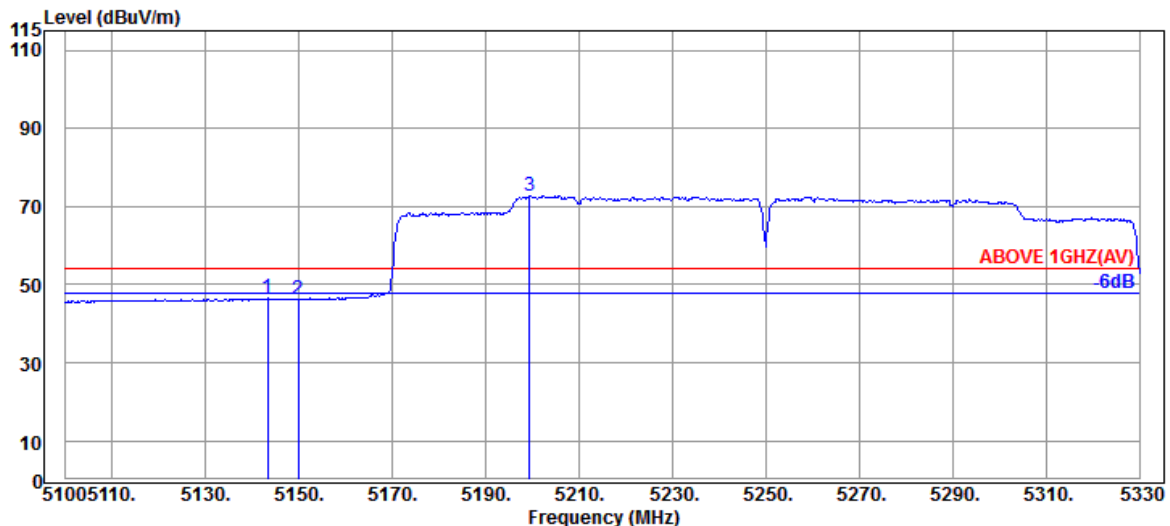

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5143.240                 | 33.70                 | 8.88            | 39.29                  | 43.15             | 46.44                   | 54.00           | 7.56        | Average  |
| 5149.910                 | 33.70                 | 8.88            | 39.29                  | 42.90             | 46.19                   | 54.00           | 7.81        | Average  |
| @ 5199.360               | 33.70                 | 8.91            | 39.28                  | 69.33             | 72.66                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

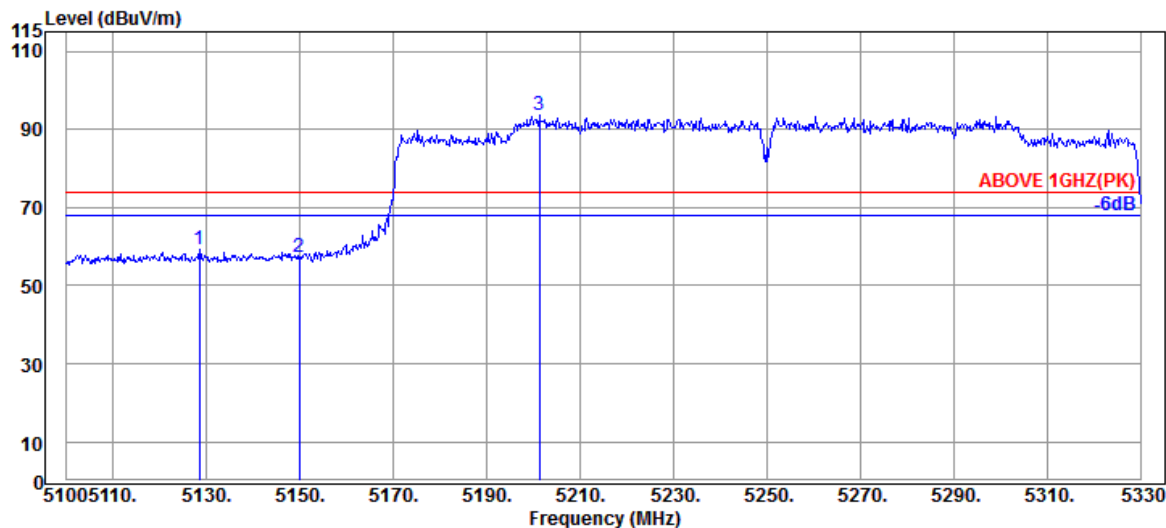

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5128.520                 | 33.70                 | 8.88            | 39.29            | 55.92             | 59.21                   | 74.00           | 14.79       | Peak     |
| 5149.910                 | 33.70                 | 8.88            | 39.29            | 53.96             | 57.25                   | 74.00           | 16.75       | Peak     |
| @ 5201.200               | 33.70                 | 8.91            | 39.28            | 90.46             | 93.79                   | ---             | ---         | Peak     |

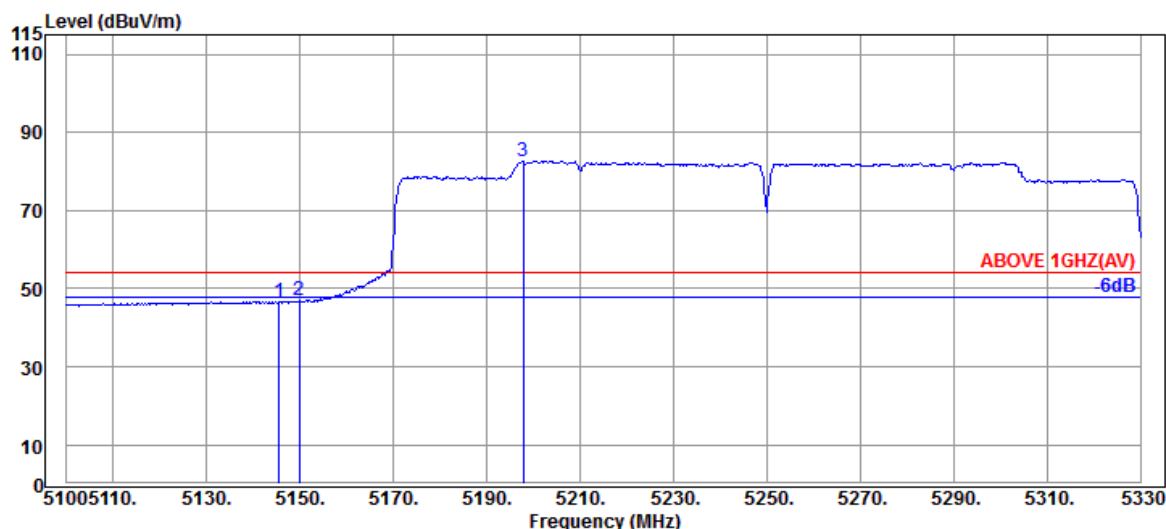

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.540                 | 33.70                 | 8.88            | 39.29            | 43.42             | 46.71                   | 54.00           | 7.29        | Average  |
| 5149.910                 | 33.70                 | 8.88            | 39.29            | 43.66             | 46.95                   | 54.00           | 7.05        | Average  |
| @ 5197.750               | 33.70                 | 8.91            | 39.28            | 79.43             | 82.76                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A     |
|      |                | Frequency  | TX 5250MHz |

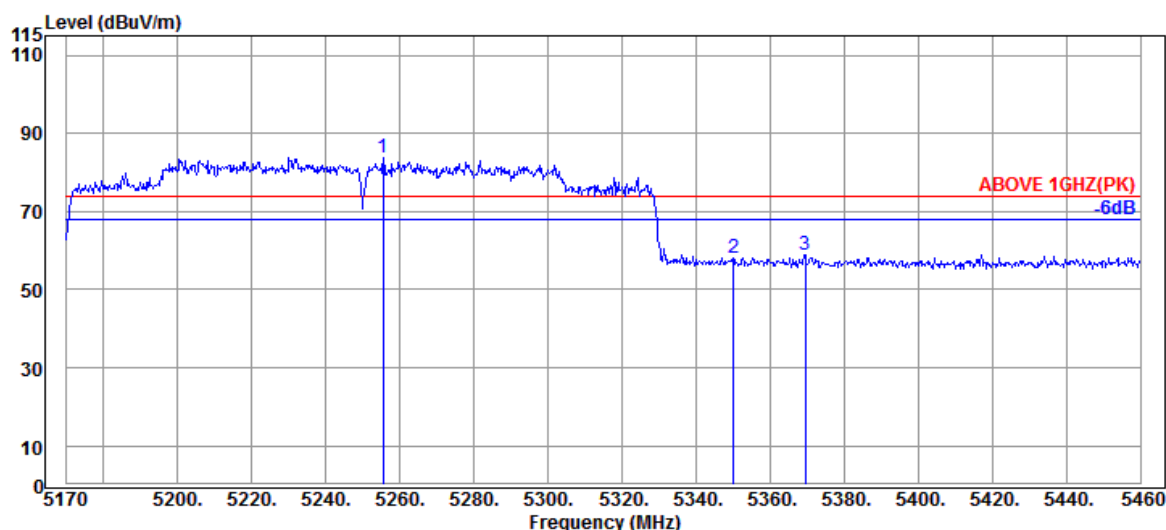

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5255.550               | 33.80                 | 8.94            | 39.28            | 80.40             | 83.86                   | ---             | ---         | Peak     |
| 5350.090                 | 33.90                 | 8.99            | 39.27            | 54.29             | 57.91                   | 74.00           | 16.09       | Peak     |
| 5369.520                 | 33.97                 | 9.00            | 39.27            | 55.21             | 58.91                   | 74.00           | 15.09       | Peak     |

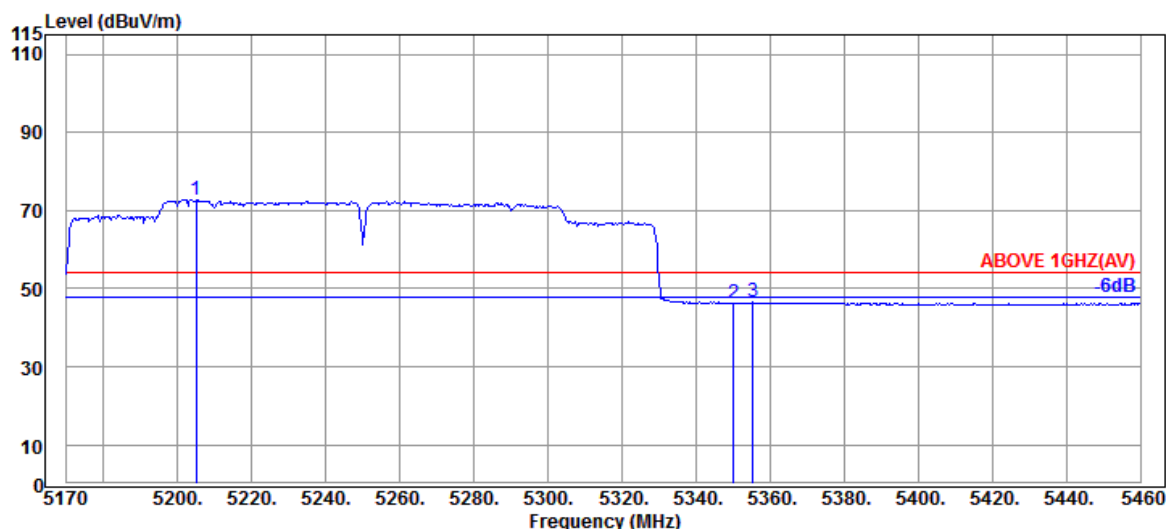

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5205.090               | 33.72                 | 8.92            | 39.28            | 69.39             | 72.75                   | ---             | ---         | Average  |
| 5350.090                 | 33.90                 | 8.99            | 39.27            | 42.52             | 46.14                   | 54.00           | 7.86        | Average  |
| 5355.310                 | 33.97                 | 9.00            | 39.27            | 42.85             | 46.55                   | 54.00           | 7.45        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A     |
|      |                | Frequency  | TX 5250MHz |

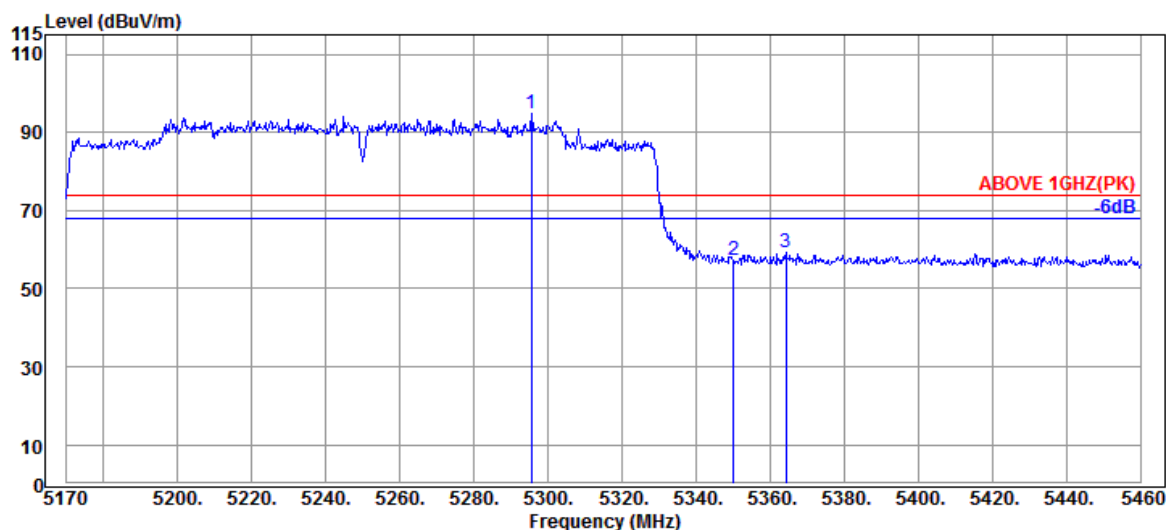

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5295.570               | 34.10                 | 8.97            | 39.28            | 90.91             | 94.70                   | ---             | ---         | Peak     |
| 5350.090                 | 33.90                 | 8.99            | 39.27            | 53.81             | 57.43                   | 74.00           | 16.57       | Peak     |
| 5364.300                 | 33.97                 | 9.00            | 39.27            | 55.45             | 59.15                   | 74.00           | 14.85       | Peak     |

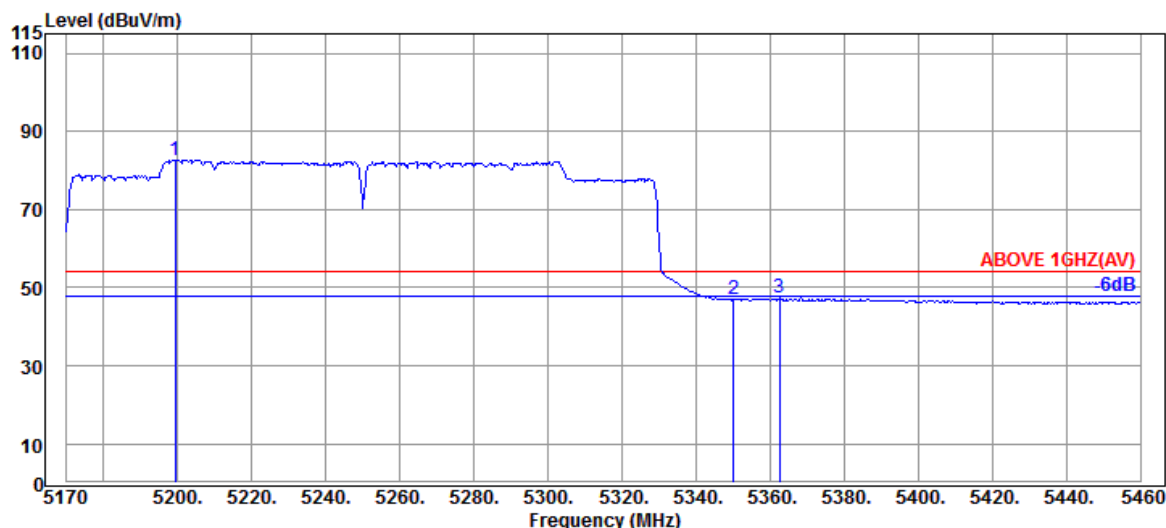

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5199.290               | 33.70                 | 8.91            | 39.28            | 79.38             | 82.71                   | ---             | ---         | Average  |
| 5350.090                 | 33.90                 | 8.99            | 39.27            | 43.22             | 46.84                   | 54.00           | 7.16        | Average  |
| 5362.560                 | 33.97                 | 9.00            | 39.27            | 43.62             | 47.32                   | 54.00           | 6.68        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

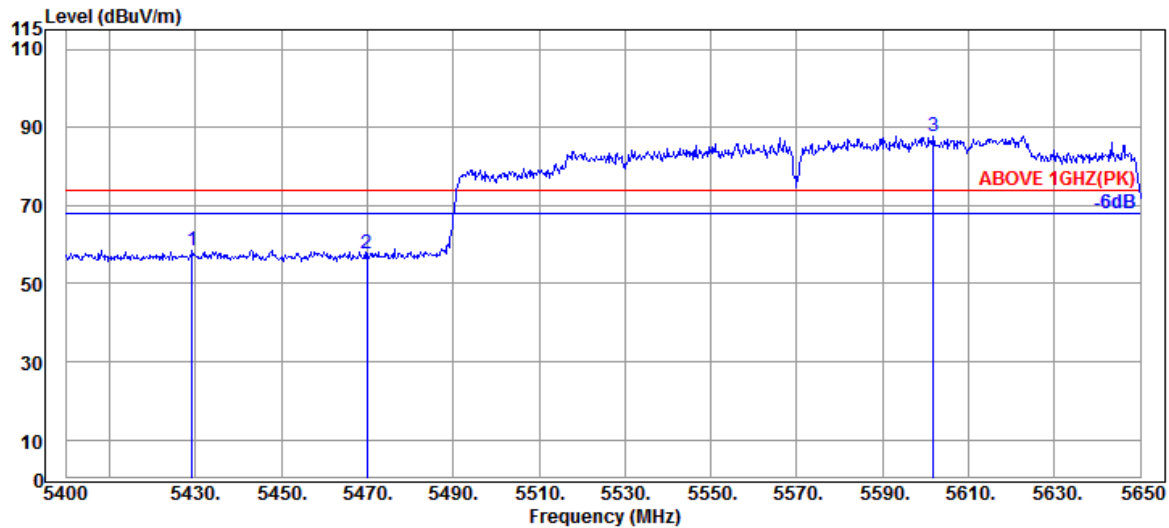

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5429.250                 | 34.15                 | 9.04            | 39.27                  | 54.52             | 58.44                   | 74.00           | 15.56       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 53.79             | 57.76                   | 74.00           | 16.24       | Peak     |
| @ 5601.750               | 34.00                 | 9.13            | 39.28                  | 83.85             | 87.70                   | ---             | ---         | Peak     |

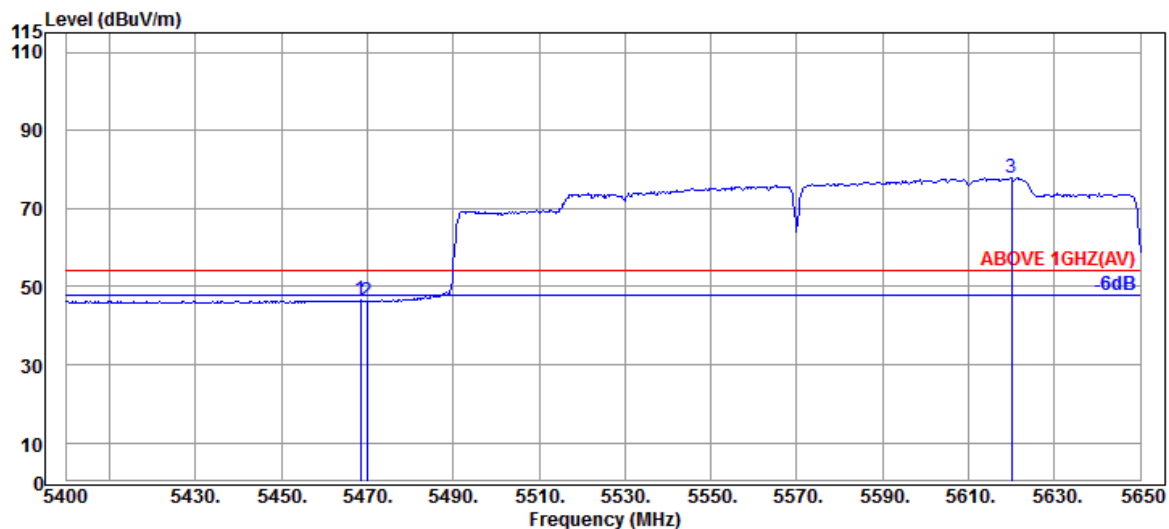

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.500                 | 34.17                 | 9.06            | 39.26                  | 42.48             | 46.45                   | 54.00           | 7.55        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 42.33             | 46.30                   | 54.00           | 7.70        | Average  |
| @ 5620.000               | 34.00                 | 9.14            | 39.29                  | 73.95             | 77.80                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

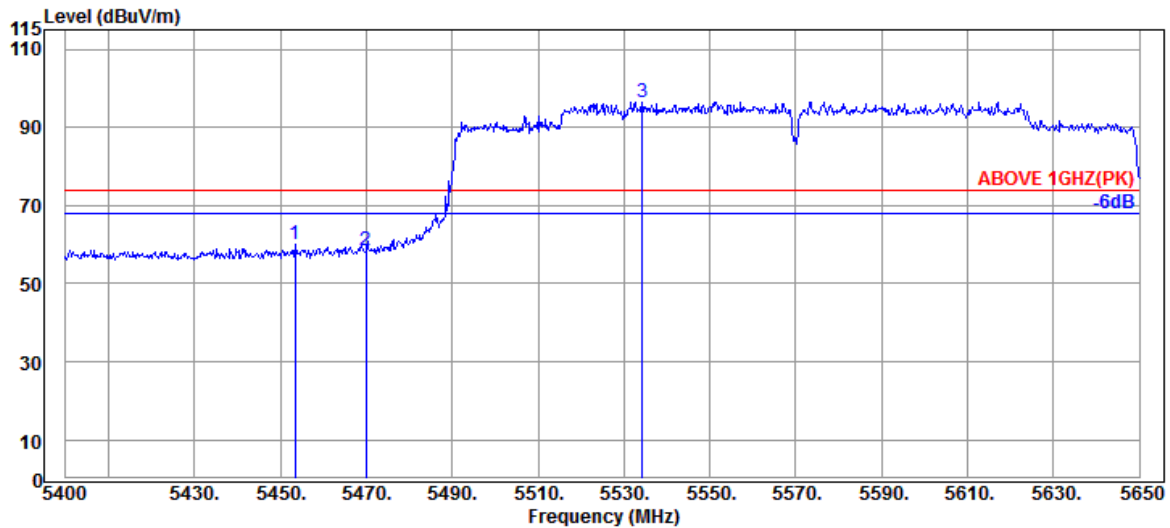

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5453.500                 | 34.20                 | 9.05            | 39.26                  | 56.23             | 60.22                   | 74.00           | 13.78       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 54.43             | 58.40                   | 74.00           | 15.60       | Peak     |
| @ 5534.250               | 34.10                 | 9.09            | 39.27                  | 92.63             | 96.55                   | ---             | ---         | Peak     |

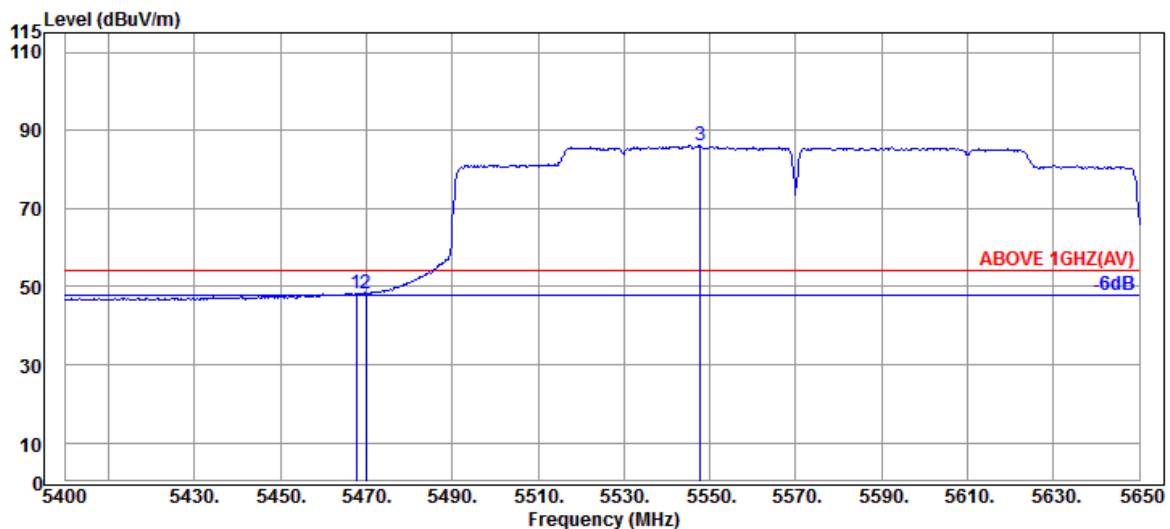


## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.750                 | 34.17                 | 9.06            | 39.26                  | 44.31             | 48.28                   | 54.00           | 5.72        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 44.37             | 48.34                   | 54.00           | 5.66        | Average  |
| @ 5547.750               | 34.10                 | 9.10            | 39.27                  | 82.14             | 86.07                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

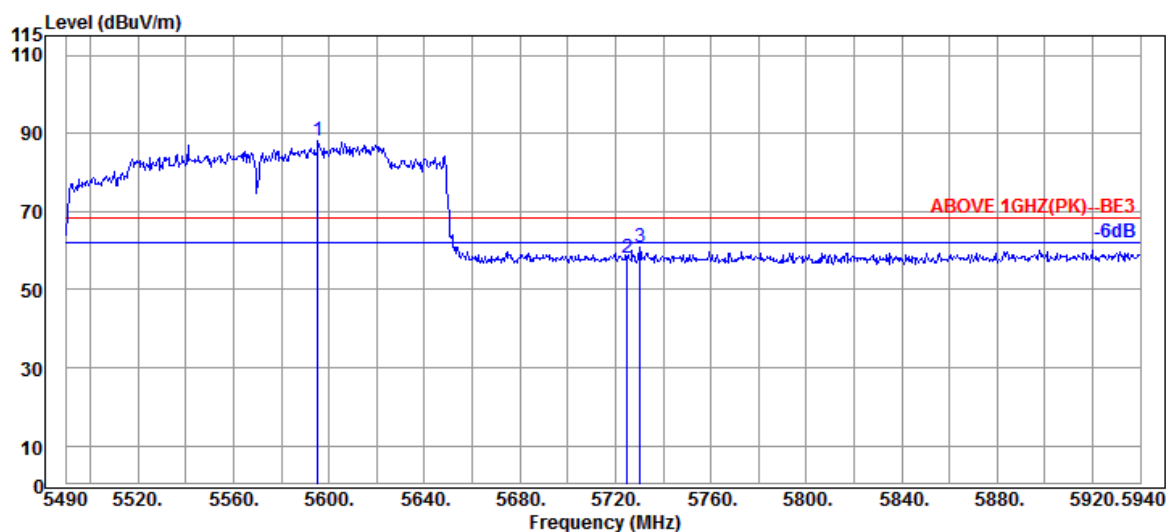

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5595.300               | 34.00                 | 9.13            | 39.28                  | 84.24             | 88.09                   | ---             | ---         | Peak     |
| 5724.900                 | 33.80                 | 9.20            | 39.30                  | 54.50             | 58.20                   | 68.20           | 10.00       | Peak     |
| 5730.300                 | 33.80                 | 9.20            | 39.31                  | 57.01             | 60.70                   | 68.20           | 7.50        | Peak     |

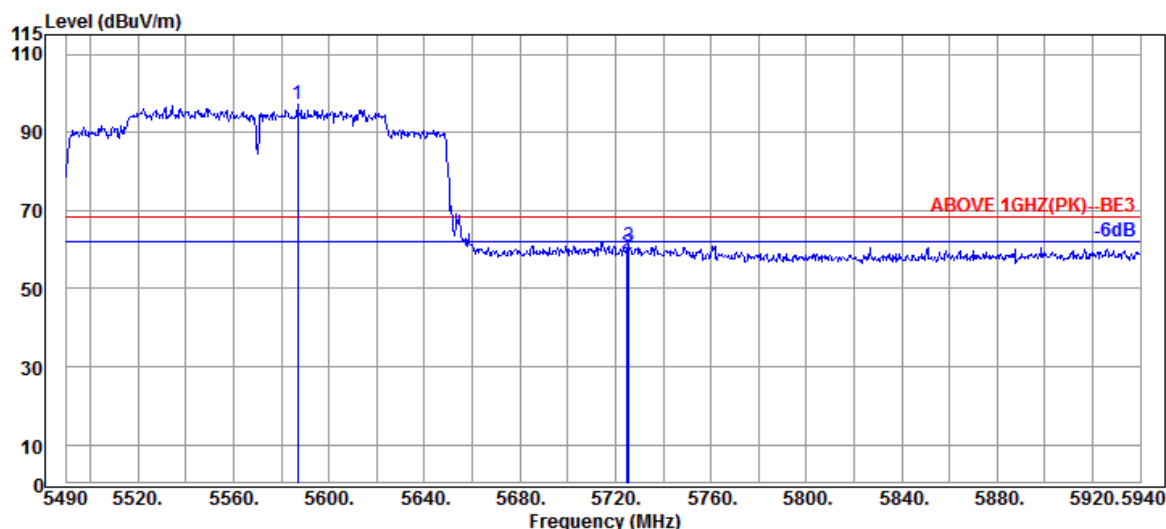

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5586.750               | 34.03                 | 9.12            | 39.28                  | 93.27             | 97.14                   | ---             | ---         | Peak     |
| 5724.900                 | 33.80                 | 9.20            | 39.30                  | 55.14             | 58.84                   | 68.20           | 9.36        | Peak     |
| 5725.800                 | 33.80                 | 9.20            | 39.30                  | 57.30             | 61.00                   | 68.20           | 7.20        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 1          |
| RU Configuration | 26/0          | Frequency  | TX 5180MHz |

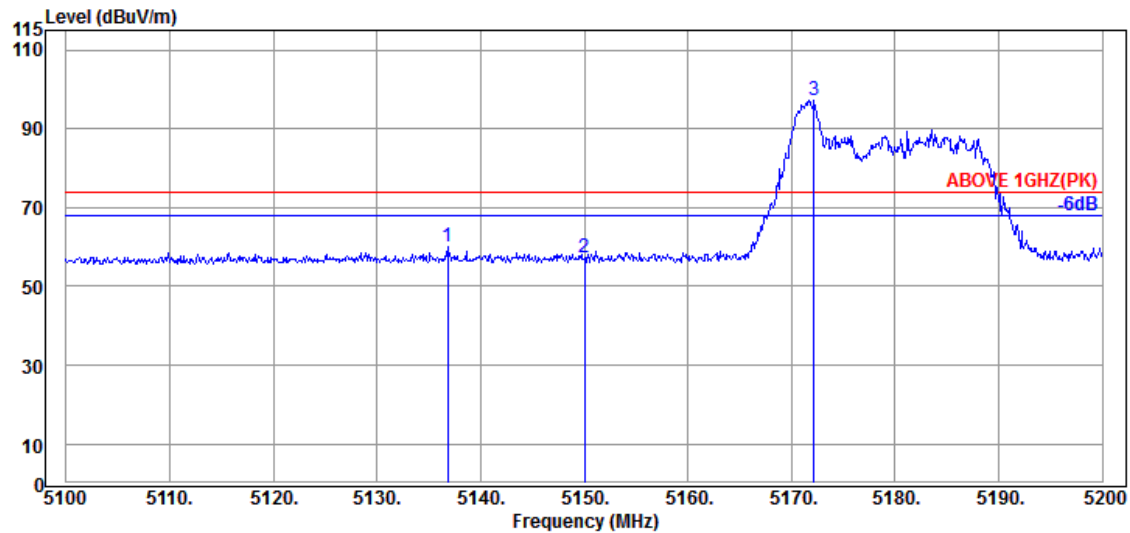

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5136.800                 | 33.70                 | 8.88            | 39.29            | 56.64             | 59.93                   | 74.00           | 14.07       | Peak     |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 53.83             | 57.12                   | 74.00           | 16.88       | Peak     |
| @ 5172.200               | 33.70                 | 8.90            | 39.29            | 93.77             | 97.08                   | ---             | ---         | Peak     |

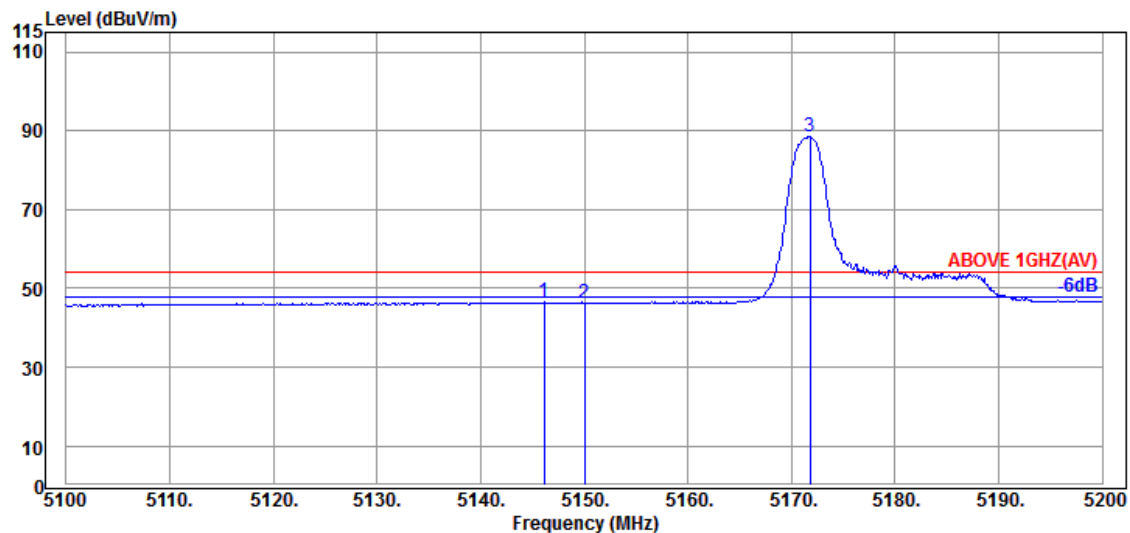


## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.100                 | 33.70                 | 8.88            | 39.29            | 43.18             | 46.47                   | 54.00           | 7.53        | Average  |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 42.95             | 46.24                   | 54.00           | 7.76        | Average  |
| @ 5171.800               | 33.70                 | 8.90            | 39.29            | 85.33             | 88.64                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 1          |
| RU Configuration | 26/0          | Frequency  | TX 5180MHz |

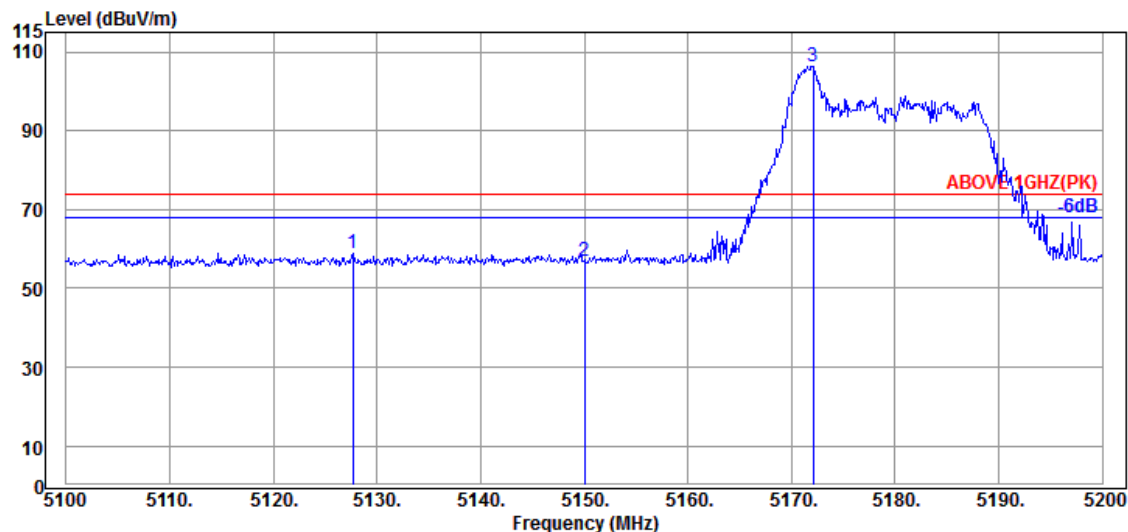

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5127.700                 | 33.70                 | 8.88            | 39.29            | 55.70             | 58.99                   | 74.00           | 15.01       | Peak     |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 53.45             | 56.74                   | 74.00           | 17.26       | Peak     |
| @ 5172.100               | 33.70                 | 8.90            | 39.29            | 103.02            | 106.33                  | ---             | ---         | Peak     |

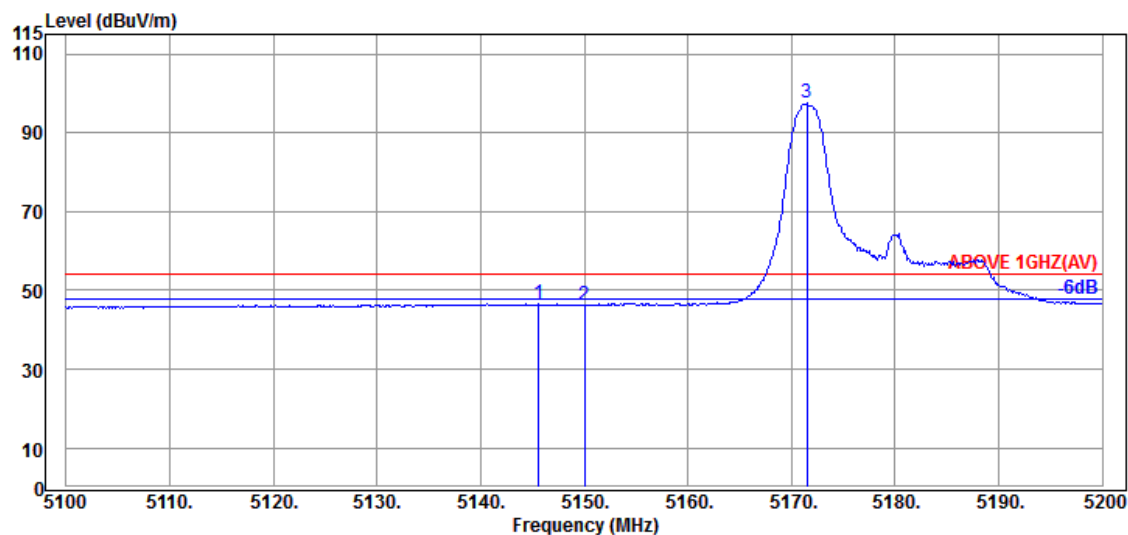


## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.600                 | 33.70                 | 8.88            | 39.29            | 43.29             | 46.58                   | 54.00           | 7.42        | Average  |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 42.98             | 46.27                   | 54.00           | 7.73        | Average  |
| @ 5171.500               | 33.70                 | 8.89            | 39.29            | 94.15             | 97.45                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 1          |
| RU Configuration | 52/37         | Frequency  | TX 5180MHz |

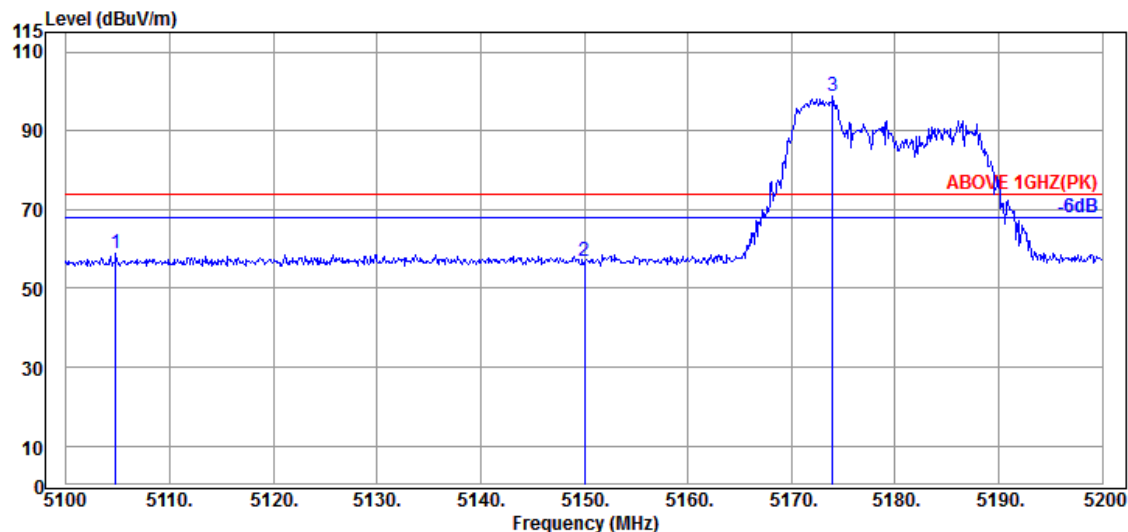

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5104.800                 | 33.70                 | 8.86            | 39.29            | 55.54             | 58.81                   | 74.00           | 15.19       | Peak     |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 53.68             | 56.97                   | 74.00           | 17.03       | Peak     |
| @ 5174.000               | 33.70                 | 8.90            | 39.28            | 95.52             | 98.84                   | ---             | ---         | Peak     |

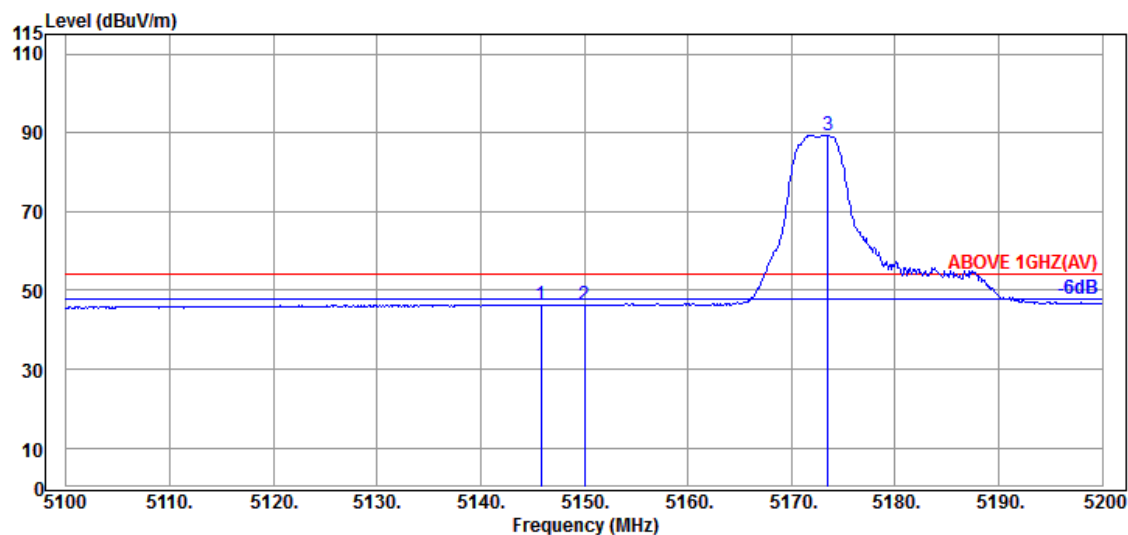

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.800                 | 33.70                 | 8.88            | 39.29            | 43.13             | 46.42                   | 54.00           | 7.58        | Average  |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 43.09             | 46.38                   | 54.00           | 7.62        | Average  |
| @ 5173.500               | 33.70                 | 8.90            | 39.28            | 86.15             | 89.47                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 1          |
| RU Configuration | 52/37         | Frequency  | TX 5180MHz |

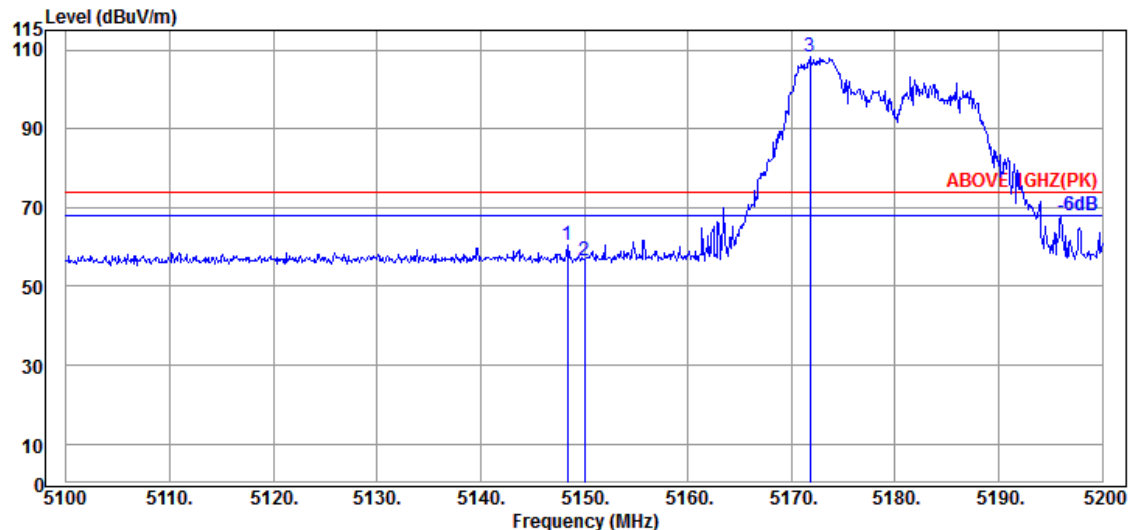

### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.400                 | 33.70                 | 8.88            | 39.29            | 56.99             | 60.28                   | 74.00           | 13.72       | Peak     |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 53.17             | 56.46                   | 74.00           | 17.54       | Peak     |
| @ 5171.800               | 33.70                 | 8.90            | 39.29            | 104.92            | 108.23                  | ---             | ---         | Peak     |

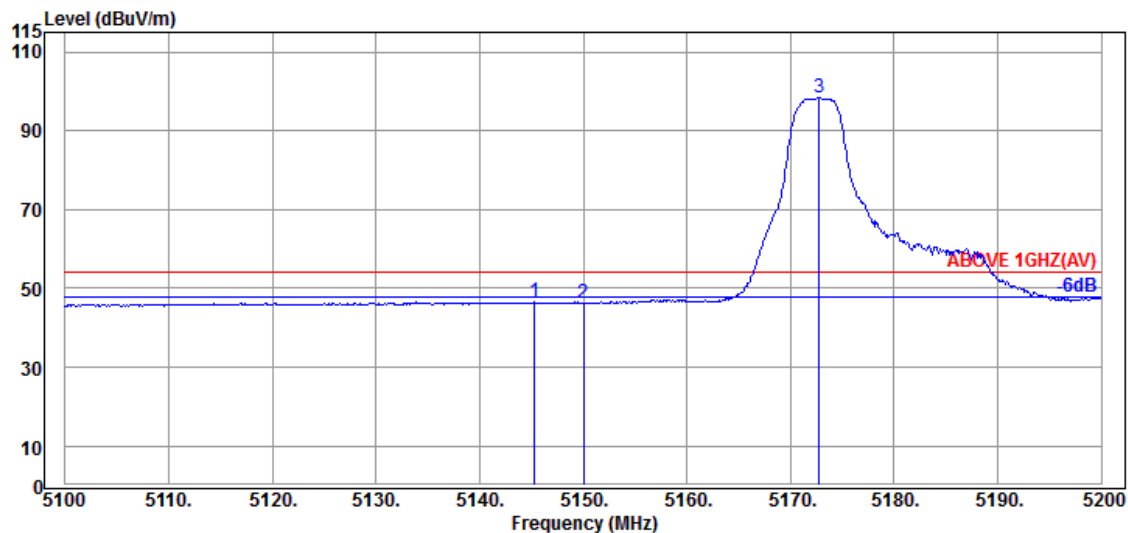

### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.300                 | 33.70                 | 8.88            | 39.29            | 43.28             | 46.57                   | 54.00           | 7.43        | Average  |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 43.06             | 46.35                   | 54.00           | 7.65        | Average  |
| @ 5172.800               | 33.70                 | 8.90            | 39.29            | 95.05             | 98.36                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 1          |
| RU Configuration | 106/53        | Frequency  | TX 5180MHz |

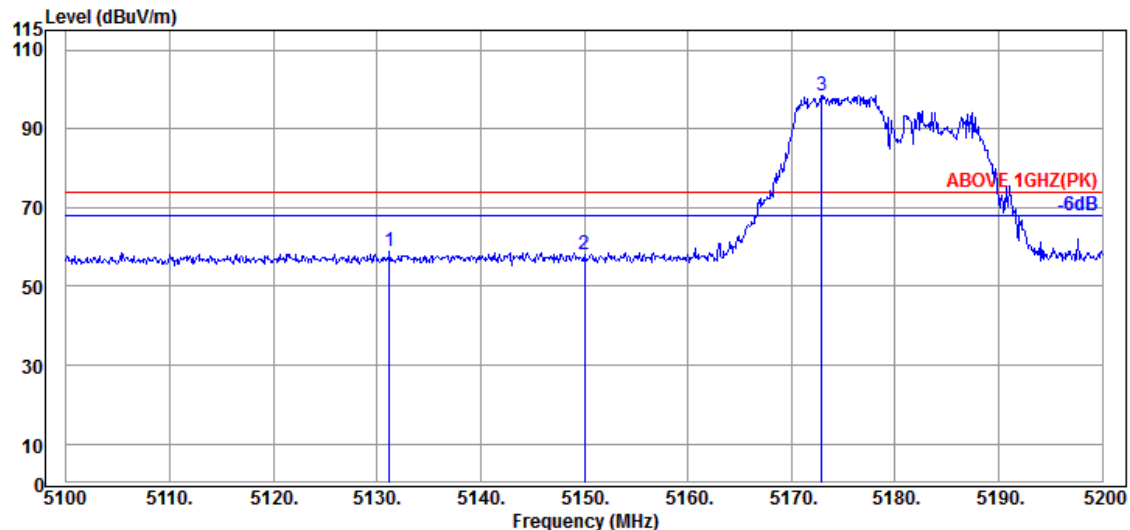

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5131.200                 | 33.70                 | 8.88            | 39.29            | 55.41             | 58.70                   | 74.00           | 15.30       | Peak     |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 54.99             | 58.28                   | 74.00           | 15.72       | Peak     |
| @ 5172.900               | 33.70                 | 8.90            | 39.29            | 95.19             | 98.50                   | ---             | ---         | Peak     |

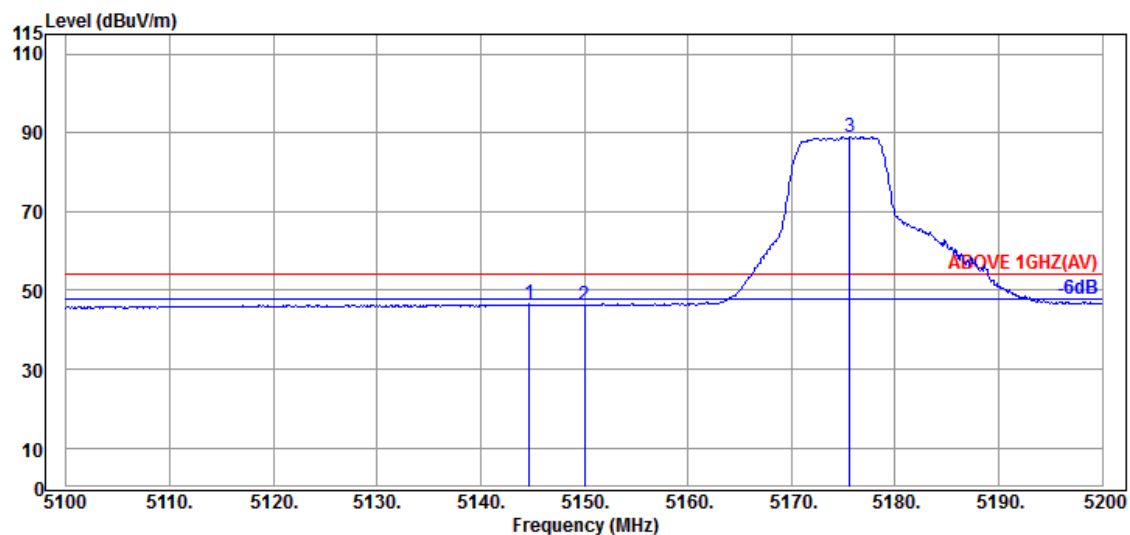


## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5144.700                 | 33.70                 | 8.88            | 39.29            | 43.17             | 46.46                   | 54.00           | 7.54        | Average  |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 42.90             | 46.19                   | 54.00           | 7.81        | Average  |
| @ 5175.600               | 33.70                 | 8.90            | 39.28            | 85.61             | 88.93                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 1          |
| RU Configuration | 106/53        | Frequency  | TX 5180MHz |

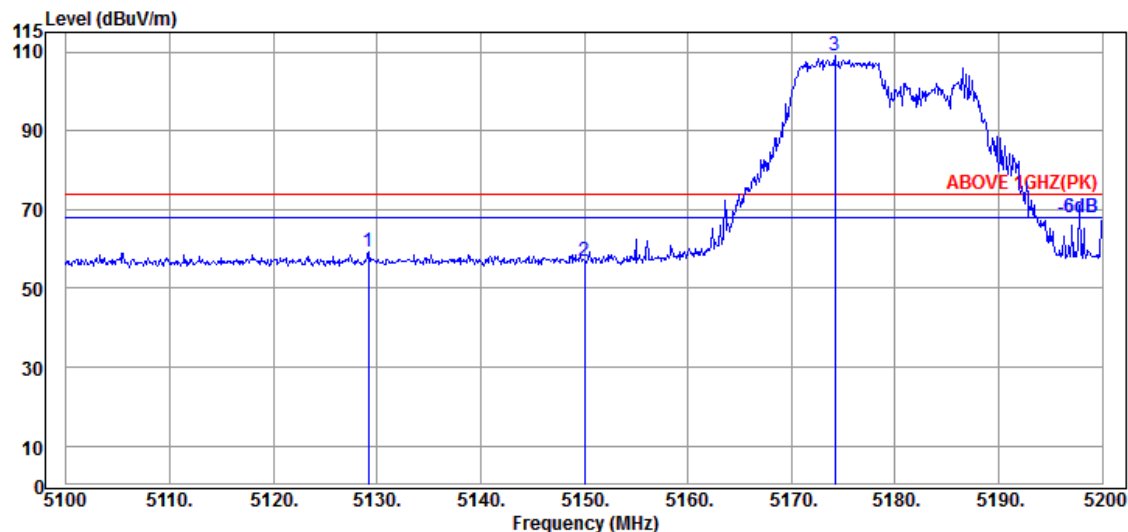

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5129.200                 | 33.70                 | 8.88            | 39.29            | 55.88             | 59.17                   | 74.00           | 14.83       | Peak     |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 53.69             | 56.98                   | 74.00           | 17.02       | Peak     |
| @ 5174.200               | 33.70                 | 8.90            | 39.28            | 105.85            | 109.17                  | ---             | ---         | Peak     |

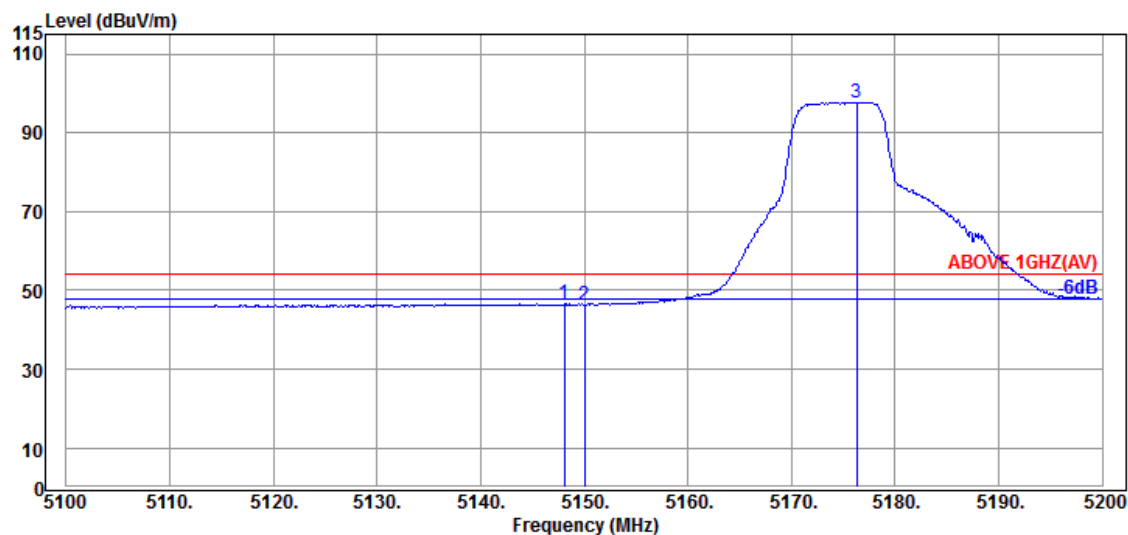

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.100                 | 33.70                 | 8.88            | 39.29            | 43.30             | 46.59                   | 54.00           | 7.41        | Average  |
| 5150.000                 | 33.70                 | 8.88            | 39.29            | 43.04             | 46.33                   | 54.00           | 7.67        | Average  |
| @ 5176.300               | 33.70                 | 8.90            | 39.28            | 94.48             | 97.80                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 26/8          | Frequency  | TX 5320MHz |

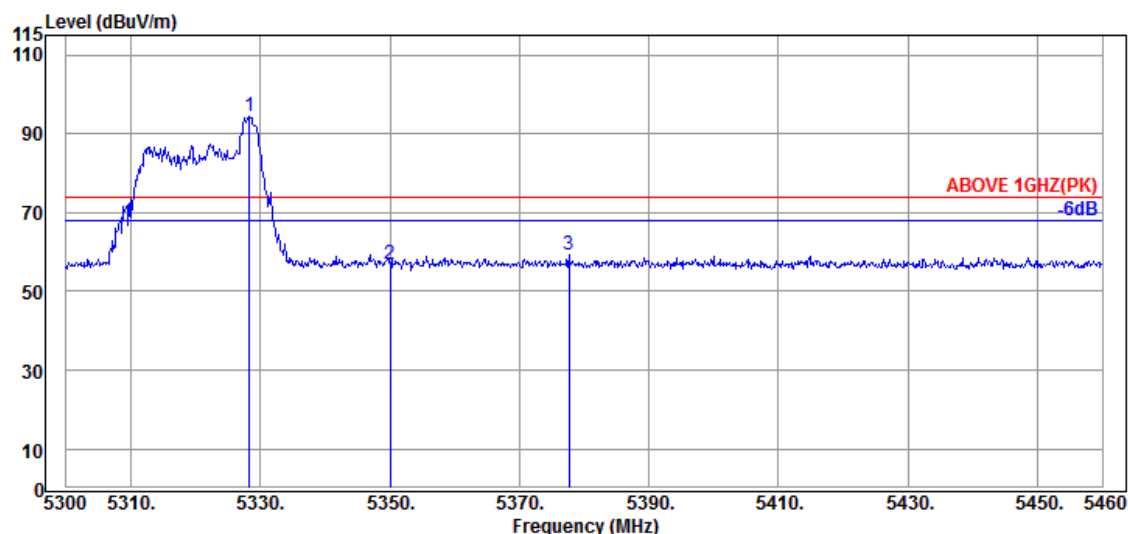

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.320               | 33.97                 | 8.99            | 39.27            | 90.80             | 94.49                   | ---             | ---         | Peak     |
| 5350.080                 | 33.90                 | 8.99            | 39.27            | 53.35             | 56.97                   | 74.00           | 17.03       | Peak     |
| 5377.600                 | 34.03                 | 9.01            | 39.27            | 55.53             | 59.30                   | 74.00           | 14.70       | Peak     |

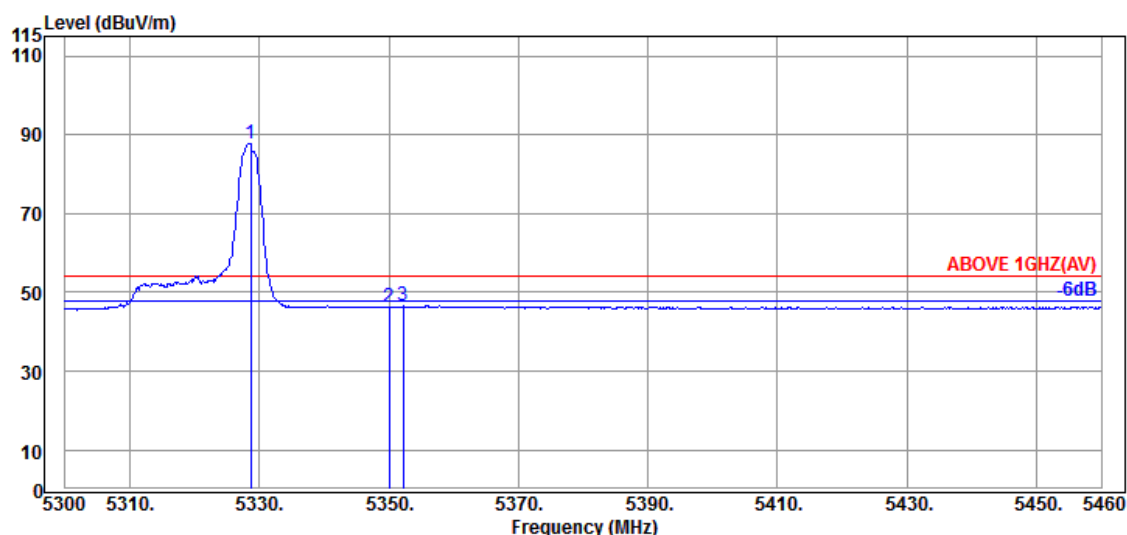

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.640               | 33.97                 | 8.99            | 39.27            | 84.04             | 87.73                   | ---             | ---         | Average  |
| 5350.080                 | 33.90                 | 8.99            | 39.27            | 42.57             | 46.19                   | 54.00           | 7.81        | Average  |
| 5352.160                 | 33.90                 | 8.99            | 39.27            | 42.91             | 46.53                   | 54.00           | 7.47        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 26/8          | Frequency  | TX 5320MHz |

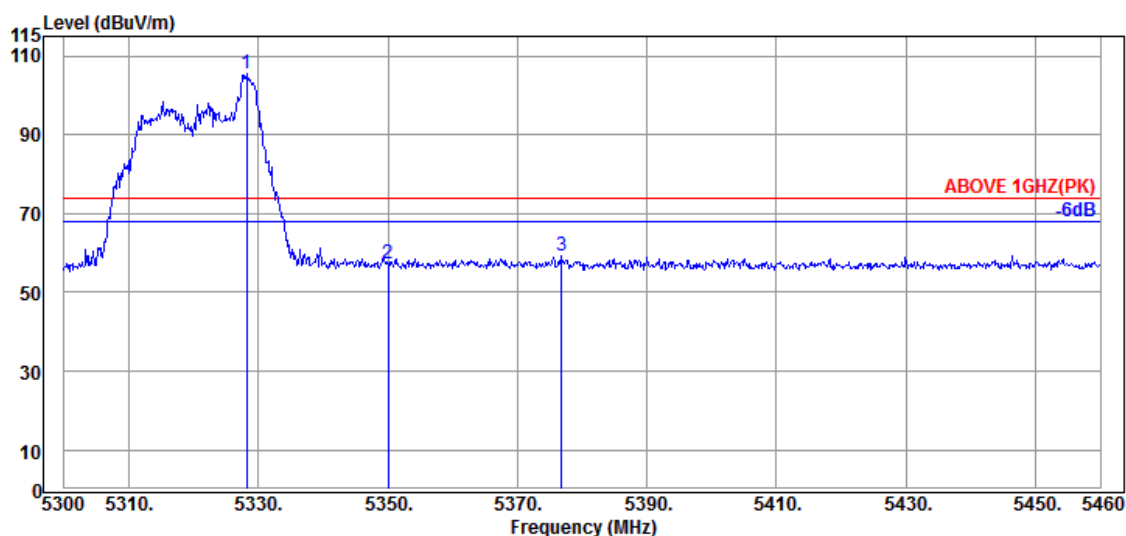

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160               | 33.97                 | 8.99            | 39.27                  | 101.67            | 105.36                  | ---             | ---         | Peak     |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 53.62             | 57.24                   | 74.00           | 16.76       | Peak     |
| 5376.800                 | 34.03                 | 9.01            | 39.27                  | 55.43             | 59.20                   | 74.00           | 14.80       | Peak     |

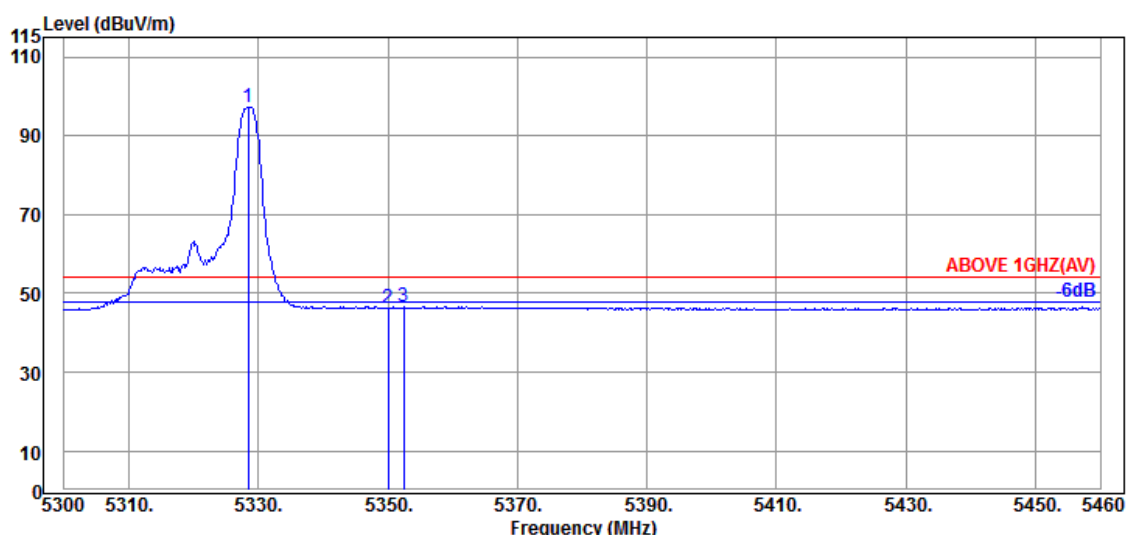

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.480               | 33.97                 | 8.99            | 39.27                  | 93.63             | 97.32                   | ---             | ---         | Average  |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 42.73             | 46.35                   | 54.00           | 7.65        | Average  |
| 5352.480                 | 33.90                 | 8.99            | 39.27                  | 42.96             | 46.58                   | 54.00           | 7.42        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 52/40         | Frequency  | TX 5320MHz |

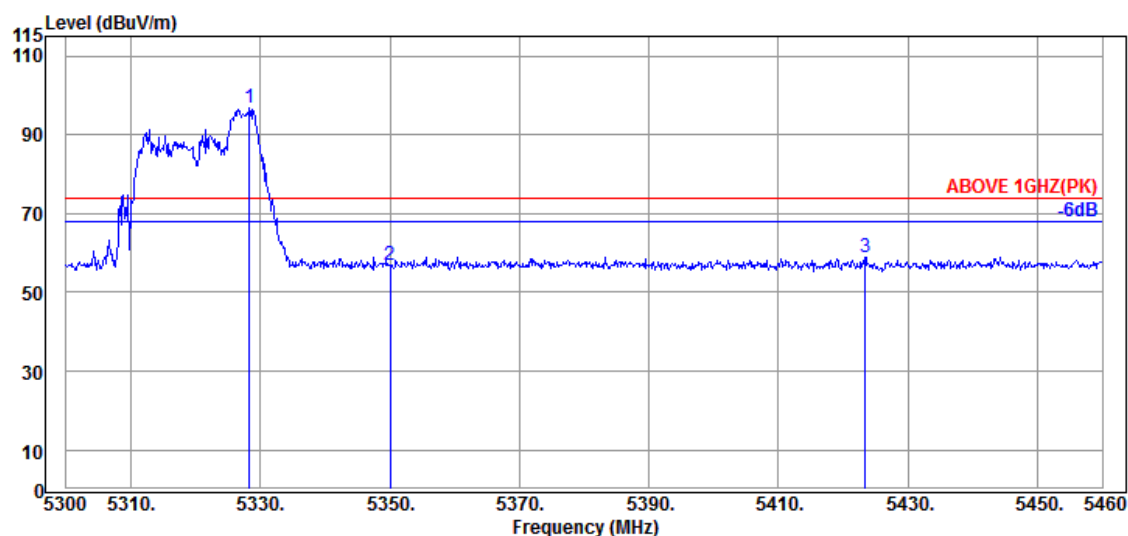

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.320               | 33.97                 | 8.99            | 39.27                  | 93.18             | 96.87                   | ---             | ---         | Peak     |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 53.48             | 57.10                   | 74.00           | 16.90       | Peak     |
| 5423.360                 | 34.15                 | 9.04            | 39.27                  | 55.07             | 58.99                   | 74.00           | 15.01       | Peak     |

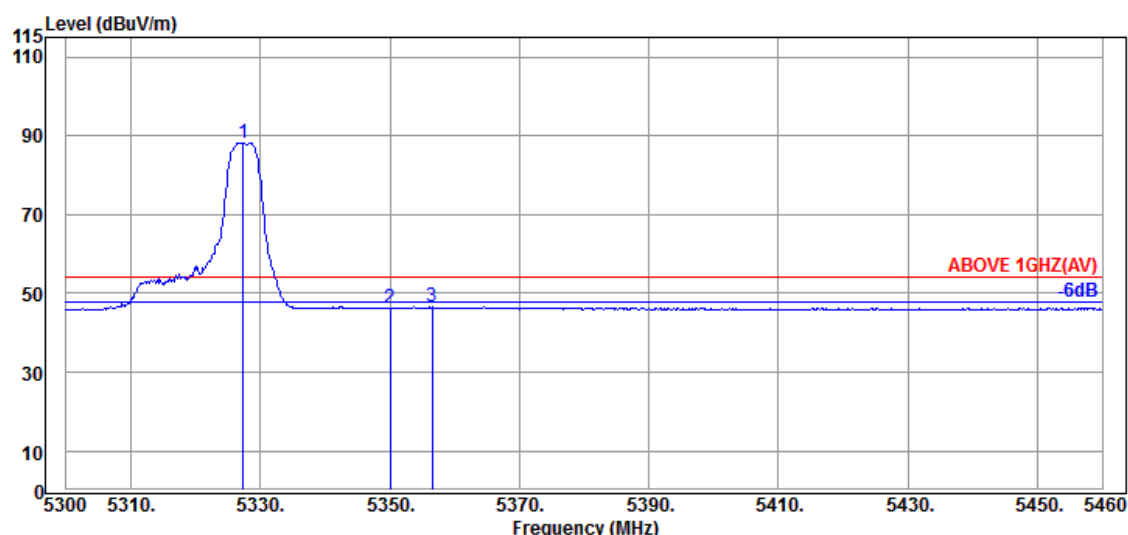

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.360               | 33.97                 | 8.99            | 39.27                  | 84.60             | 88.29                   | ---             | ---         | Average  |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 42.65             | 46.27                   | 54.00           | 7.73        | Average  |
| 5356.480                 | 33.97                 | 9.00            | 39.27                  | 42.85             | 46.55                   | 54.00           | 7.45        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 52/40         | Frequency  | TX 5320MHz |

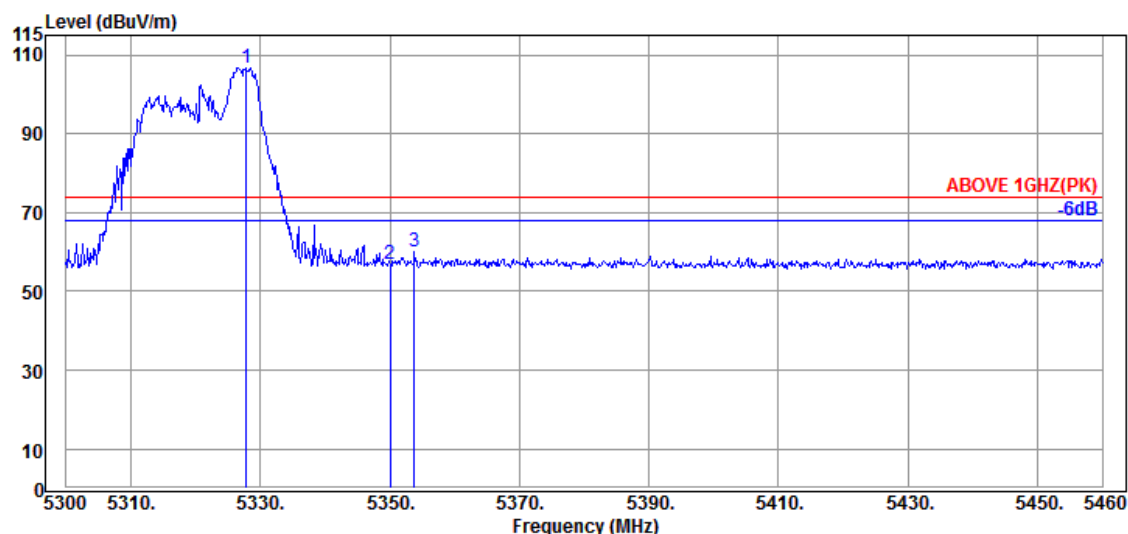

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.840               | 33.97                 | 8.99            | 39.27                  | 103.17            | 106.86                  | ---             | ---         | Peak     |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 53.39             | 57.01                   | 74.00           | 16.99       | Peak     |
| 5353.760                 | 33.90                 | 8.99            | 39.27                  | 56.42             | 60.04                   | 74.00           | 13.96       | Peak     |

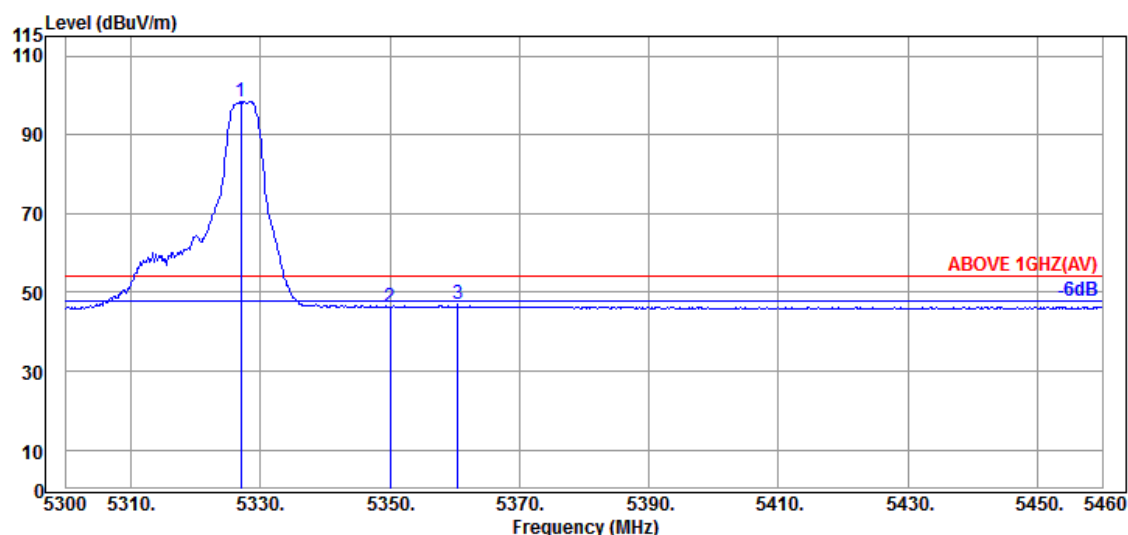

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.040               | 33.97                 | 8.99            | 39.27                  | 94.74             | 98.43                   | ---             | ---         | Average  |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 42.81             | 46.43                   | 54.00           | 7.57        | Average  |
| 5360.480                 | 33.97                 | 9.00            | 39.27                  | 43.20             | 46.90                   | 54.00           | 7.10        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 106/54        | Frequency  | TX 5320MHz |

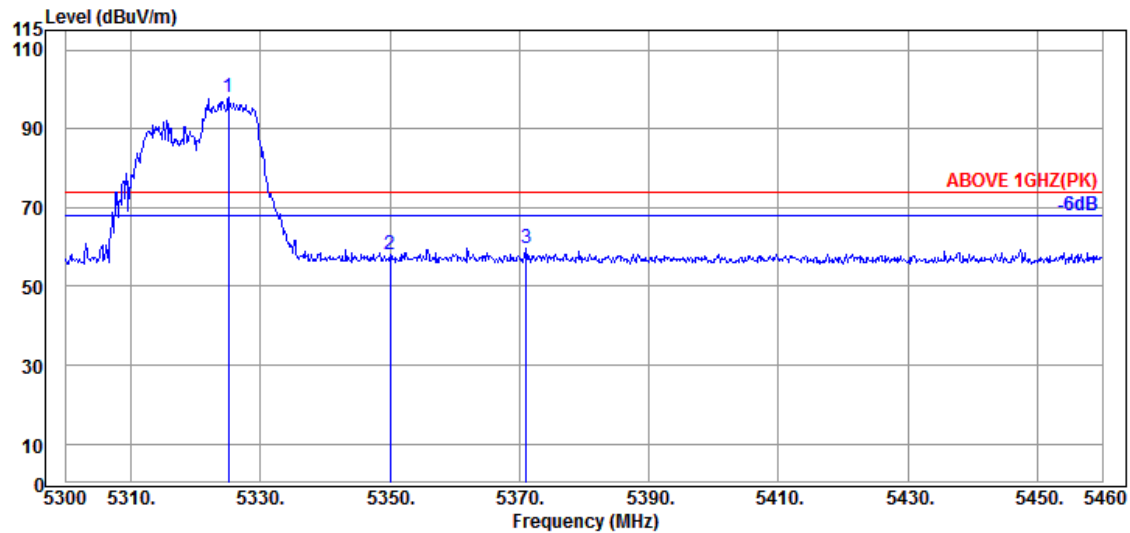

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5325.120               | 33.97                 | 8.99            | 39.27                  | 94.29             | 97.98                   | ---             | ---         | Peak     |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 54.38             | 58.00                   | 74.00           | 16.00       | Peak     |
| 5371.040                 | 34.03                 | 9.01            | 39.27                  | 55.83             | 59.60                   | 74.00           | 14.40       | Peak     |

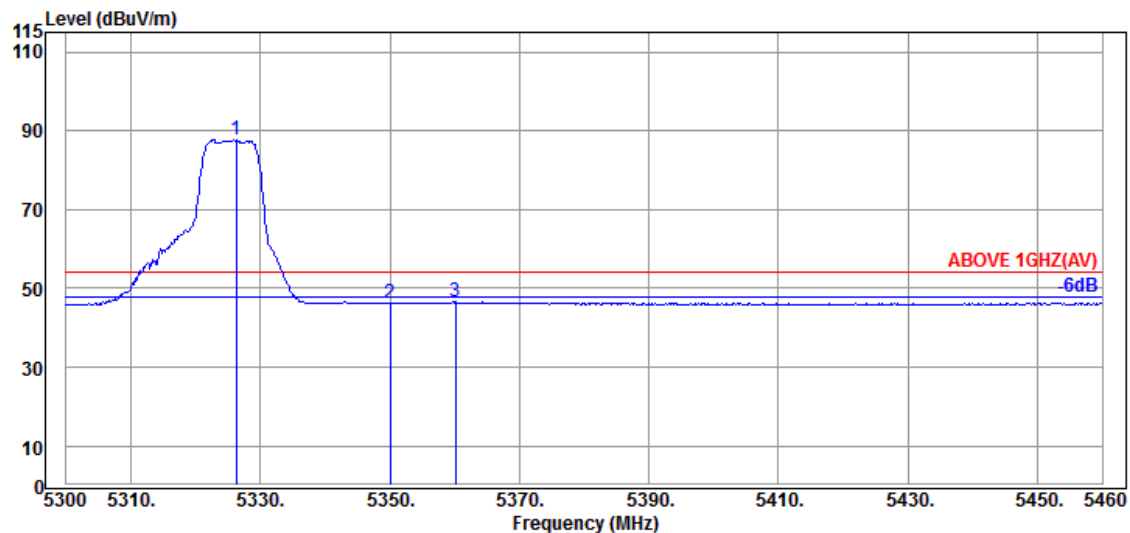

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5326.240               | 33.97                 | 8.99            | 39.27                  | 83.96             | 87.65                   | ---             | ---         | Average  |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 42.54             | 46.16                   | 54.00           | 7.84        | Average  |
| 5360.160                 | 33.97                 | 9.00            | 39.27                  | 42.84             | 46.54                   | 54.00           | 7.46        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 106/54        | Frequency  | TX 5320MHz |

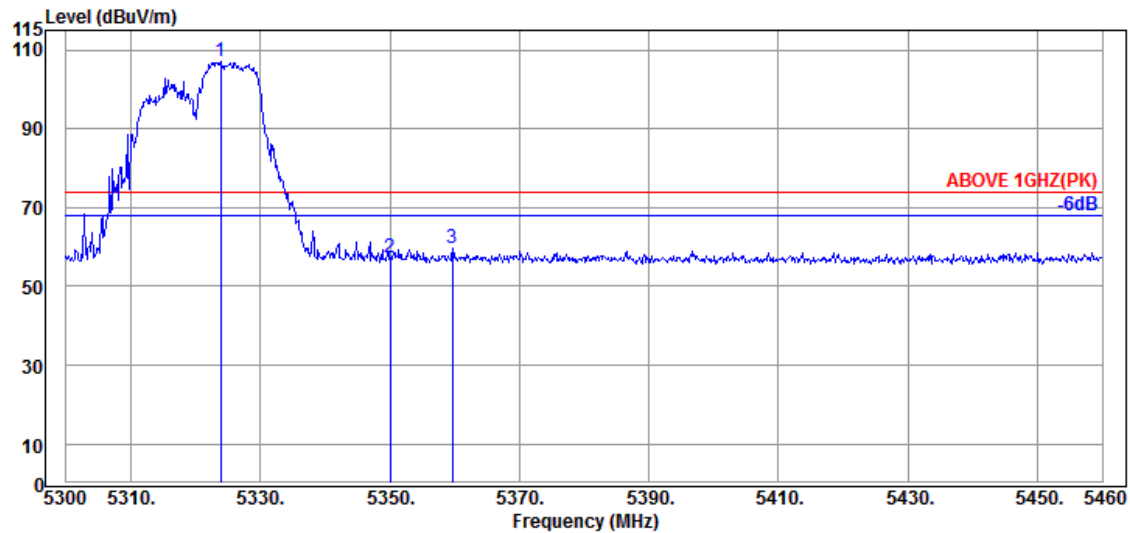

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5323.840               | 33.97                 | 8.99            | 39.27                  | 103.50            | 107.19                  | ---             | ---         | Peak     |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 53.49             | 57.11                   | 74.00           | 16.89       | Peak     |
| 5359.680                 | 33.97                 | 9.00            | 39.27                  | 55.80             | 59.50                   | 74.00           | 14.50       | Peak     |

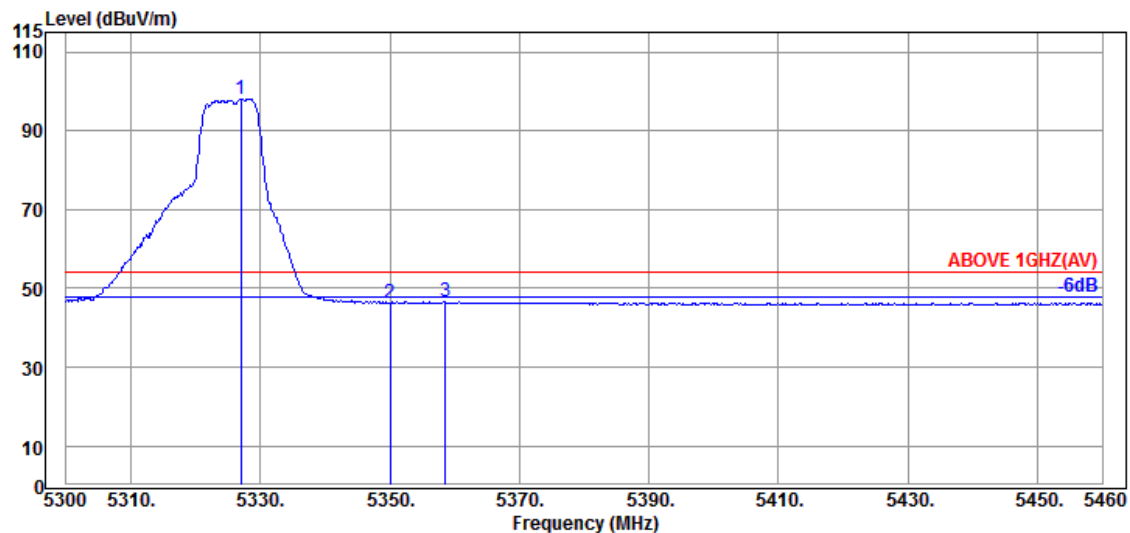

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.040               | 33.97                 | 8.99            | 39.27                  | 94.42             | 98.11                   | ---             | ---         | Average  |
| 5350.080                 | 33.90                 | 8.99            | 39.27                  | 42.64             | 46.26                   | 54.00           | 7.74        | Average  |
| 5358.560                 | 33.97                 | 9.00            | 39.27                  | 42.82             | 46.52                   | 54.00           | 7.48        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 26/0          | Frequency  | TX 5500MHz |

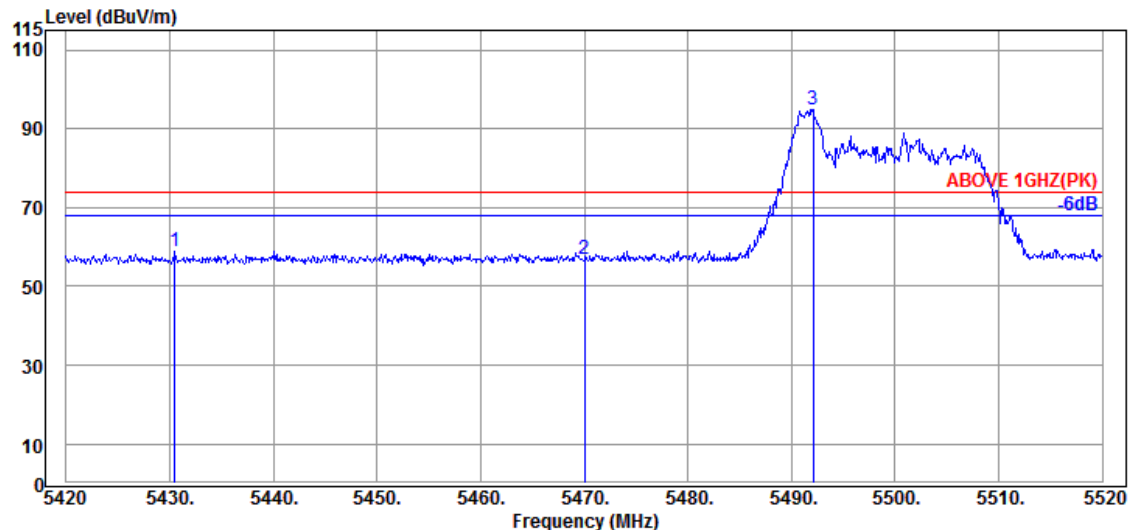

### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5430.500                 | 34.15                 | 9.04            | 39.27                  | 55.06             | 58.98                   | 74.00           | 15.02       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 52.88             | 56.85                   | 74.00           | 17.15       | Peak     |
| @ 5492.100               | 34.13                 | 9.07            | 39.26                  | 90.91             | 94.85                   | ---             | ---         | Peak     |

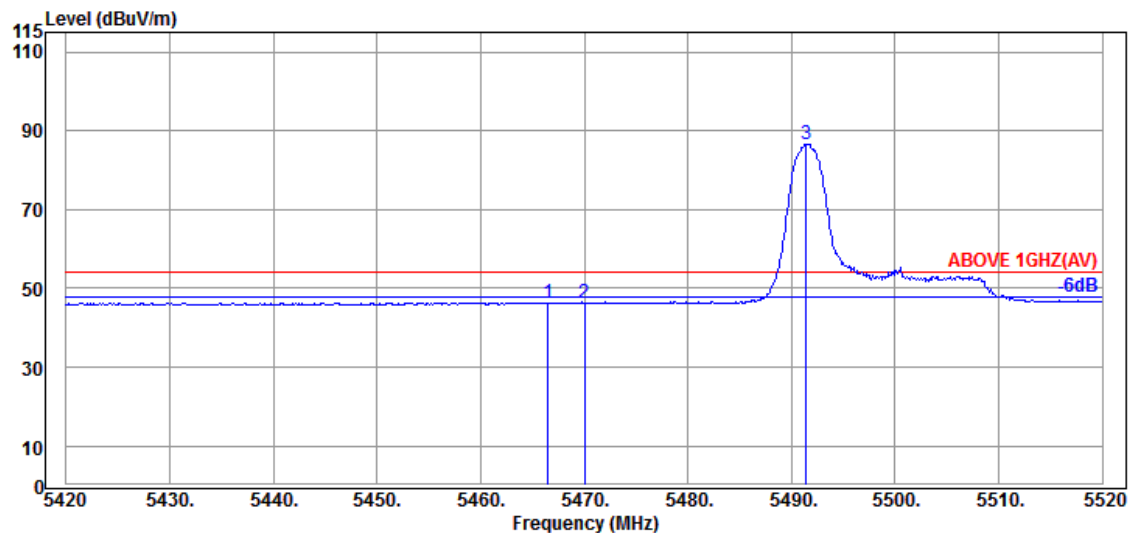

### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.500                 | 34.17                 | 9.06            | 39.26                  | 42.39             | 46.36                   | 54.00           | 7.64        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 42.19             | 46.16                   | 54.00           | 7.84        | Average  |
| @ 5491.400               | 34.13                 | 9.07            | 39.26                  | 82.73             | 86.67                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 26/0          | Frequency  | TX 5500MHz |

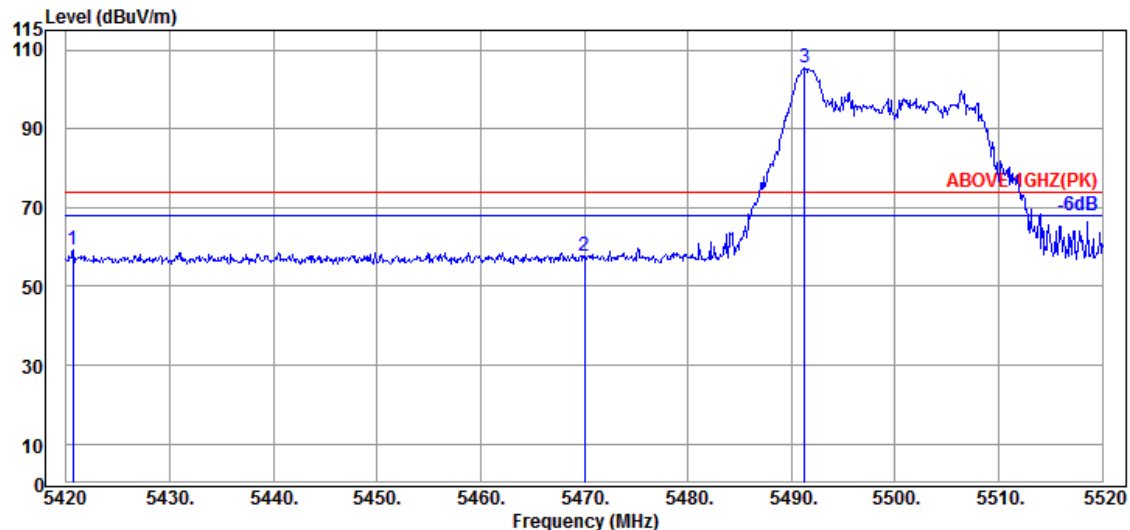

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5420.700                 | 34.15                 | 9.04            | 39.27                  | 55.30             | 59.22                   | 74.00           | 14.78       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 53.66             | 57.63                   | 74.00           | 16.37       | Peak     |
| @ 5491.300               | 34.13                 | 9.07            | 39.26                  | 101.44            | 105.38                  | ---             | ---         | Peak     |

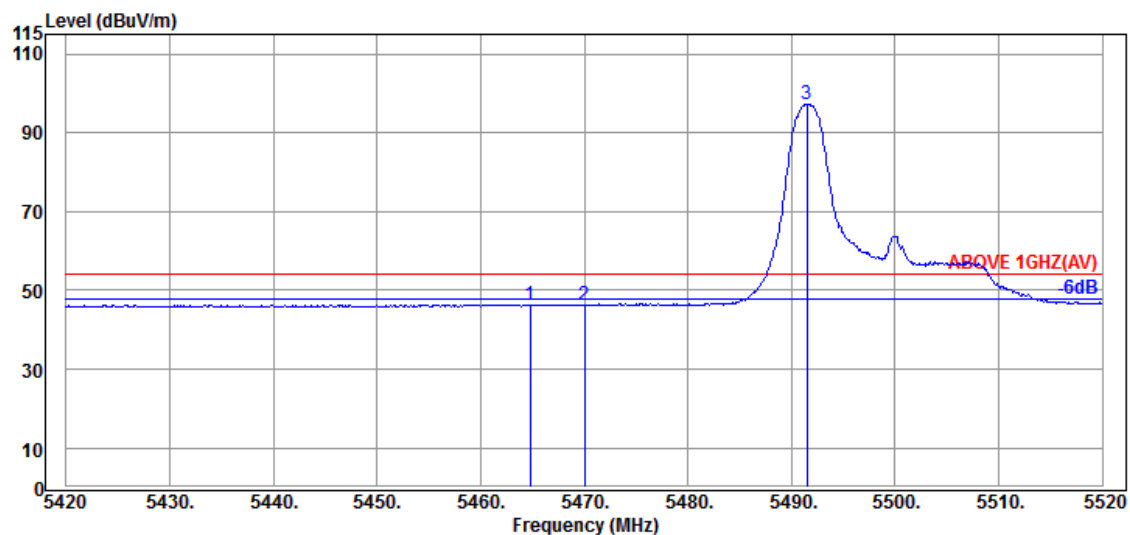

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5464.800                 | 34.17                 | 9.06            | 39.26                  | 42.46             | 46.43                   | 54.00           | 7.57        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 42.31             | 46.28                   | 54.00           | 7.72        | Average  |
| @ 5491.500               | 34.13                 | 9.07            | 39.26                  | 93.31             | 97.25                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section..

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 52/37         | Frequency  | TX 5500MHz |

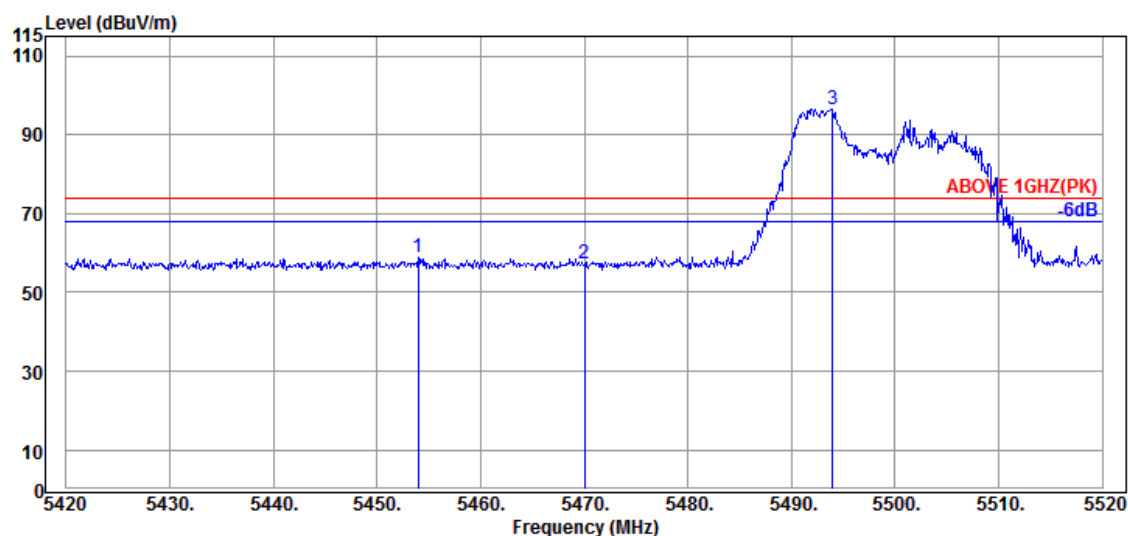

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5454.000                 | 34.20                 | 9.05            | 39.26                  | 54.75             | 58.74                   | 74.00           | 15.26       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 53.28             | 57.25                   | 74.00           | 16.75       | Peak     |
| @ 5494.000               | 34.13                 | 9.07            | 39.26                  | 92.66             | 96.60                   | ---             | ---         | Peak     |

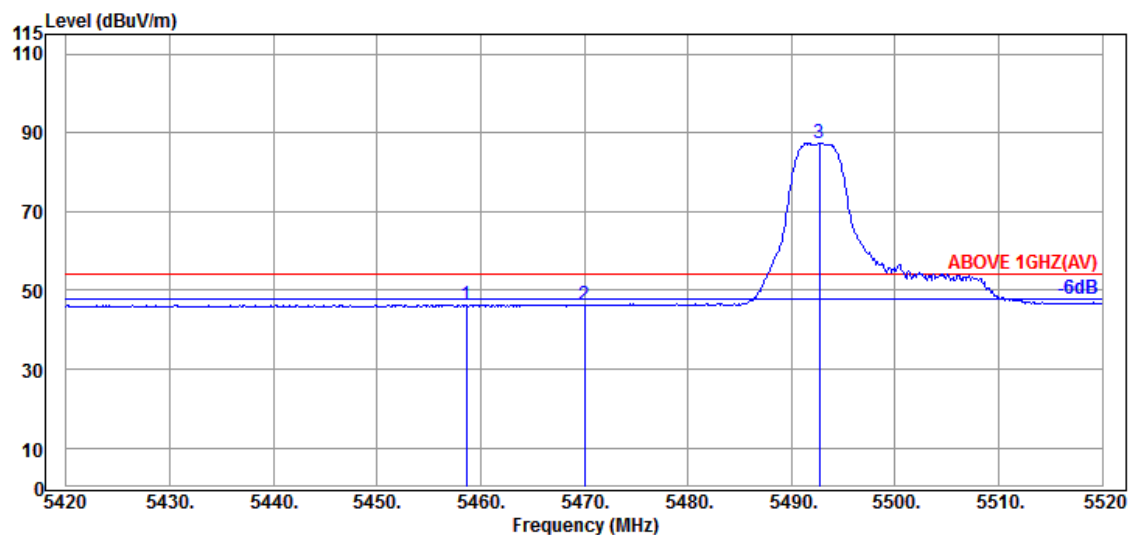

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.600                 | 34.20                 | 9.05            | 39.26                  | 42.37             | 46.36                   | 54.00           | 7.64        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 42.31             | 46.28                   | 54.00           | 7.72        | Average  |
| @ 5492.700               | 34.13                 | 9.07            | 39.26                  | 83.39             | 87.33                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 52/37         | Frequency  | TX 5500MHz |

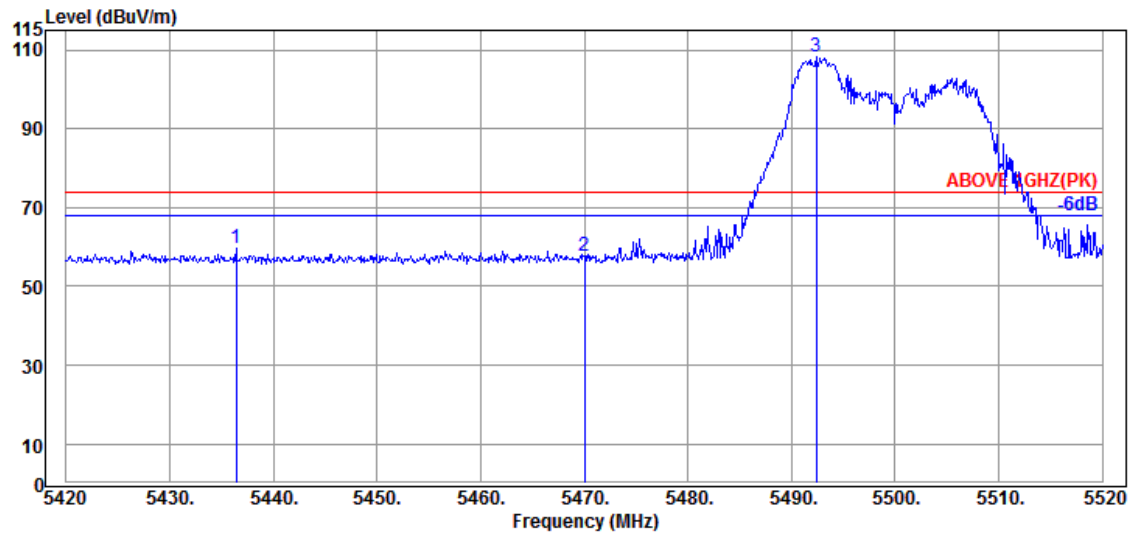

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5436.400                 | 34.17                 | 9.04            | 39.26                  | 55.62             | 59.57                   | 74.00           | 14.43       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 53.69             | 57.66                   | 74.00           | 16.34       | Peak     |
| @ 5492.400               | 34.13                 | 9.07            | 39.26                  | 104.51            | 108.45                  | ---             | ---         | Peak     |

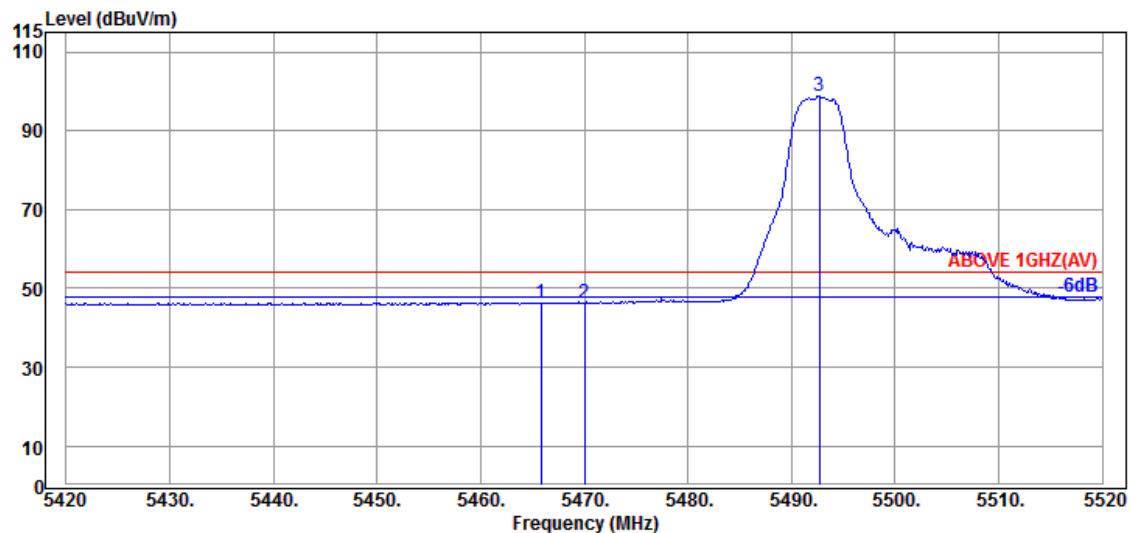

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.800                 | 34.17                 | 9.06            | 39.26                  | 42.41             | 46.38                   | 54.00           | 7.62        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 42.18             | 46.15                   | 54.00           | 7.85        | Average  |
| @ 5492.700               | 34.13                 | 9.07            | 39.26                  | 94.74             | 98.68                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 106/53        | Frequency  | TX 5500MHz |

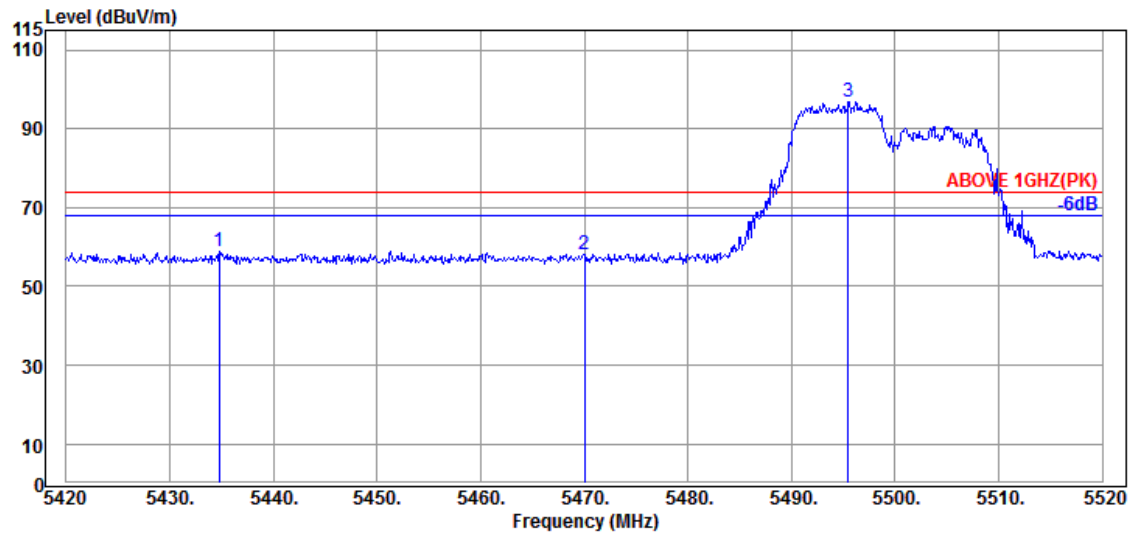

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5434.800                 | 34.17                 | 9.04            | 39.26                  | 54.99             | 58.94                   | 74.00           | 15.06       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 54.18             | 58.15                   | 74.00           | 15.85       | Peak     |
| @ 5495.500               | 34.10                 | 9.08            | 39.26                  | 92.83             | 96.75                   | ---             | ---         | Peak     |

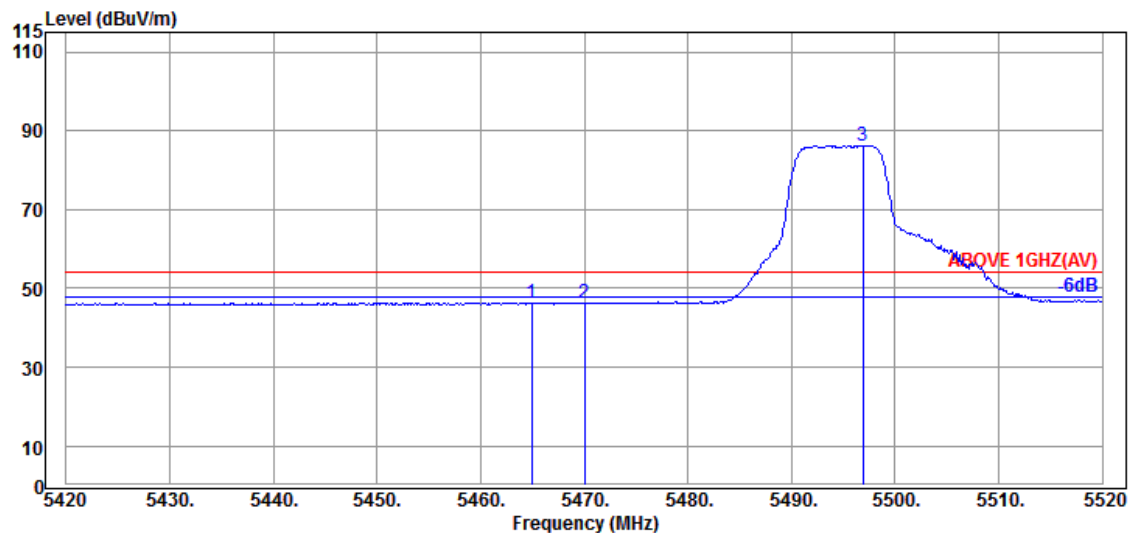

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5464.900                 | 34.17                 | 9.06            | 39.26                  | 42.40             | 46.37                   | 54.00           | 7.63        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 42.42             | 46.39                   | 54.00           | 7.61        | Average  |
| @ 5496.900               | 34.10                 | 9.08            | 39.26                  | 82.39             | 86.31                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 106/53        | Frequency  | TX 5500MHz |

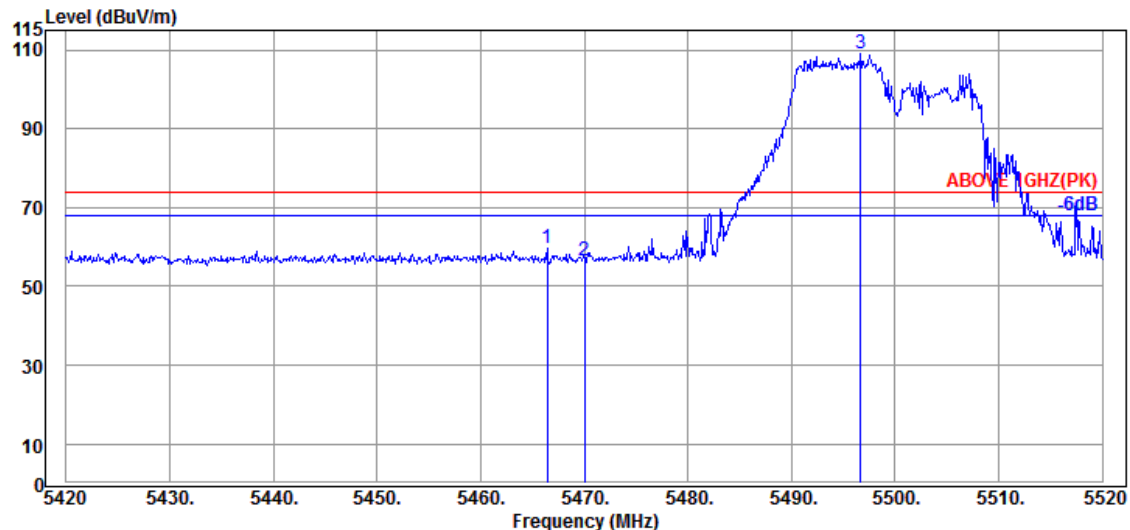

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.400                 | 34.17                 | 9.06            | 39.26            | 55.51             | 59.48                   | 74.00           | 14.52       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26            | 52.49             | 56.46                   | 74.00           | 17.54       | Peak     |
| @ 5496.700               | 34.10                 | 9.08            | 39.26            | 105.07            | 108.99                  | ---             | ---         | Peak     |

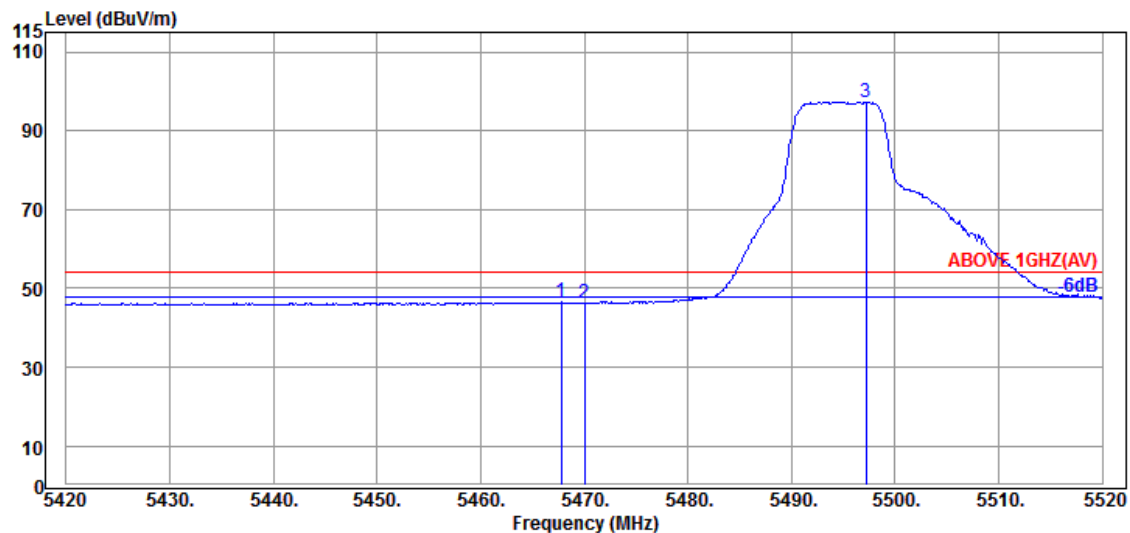

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.800                 | 34.17                 | 9.06            | 39.26            | 42.49             | 46.46                   | 54.00           | 7.54        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26            | 42.20             | 46.17                   | 54.00           | 7.83        | Average  |
| @ 5497.200               | 34.10                 | 9.08            | 39.26            | 93.40             | 97.32                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 26/8          | Frequency  | TX 5700MHz |

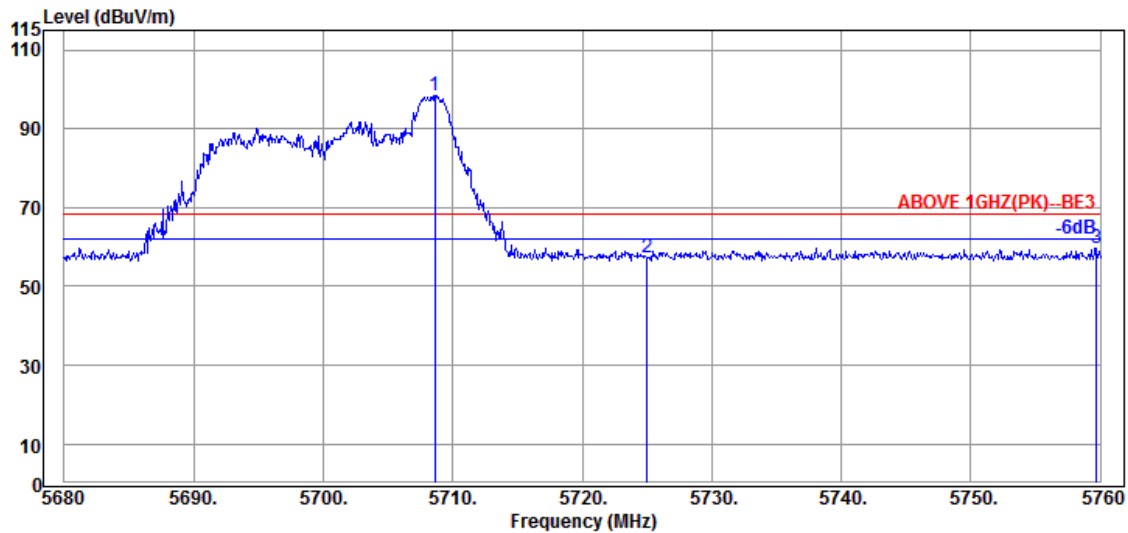

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.640               | 33.80                 | 9.19            | 39.30            | 94.67             | 98.36                   | ---             | ---         | Peak     |
| 5725.040                 | 33.80                 | 9.20            | 39.30            | 53.59             | 57.29                   | 68.20           | 10.91       | Peak     |
| 5759.680                 | 33.87                 | 9.21            | 39.31            | 55.98             | 59.75                   | 68.20           | 8.45        | Peak     |

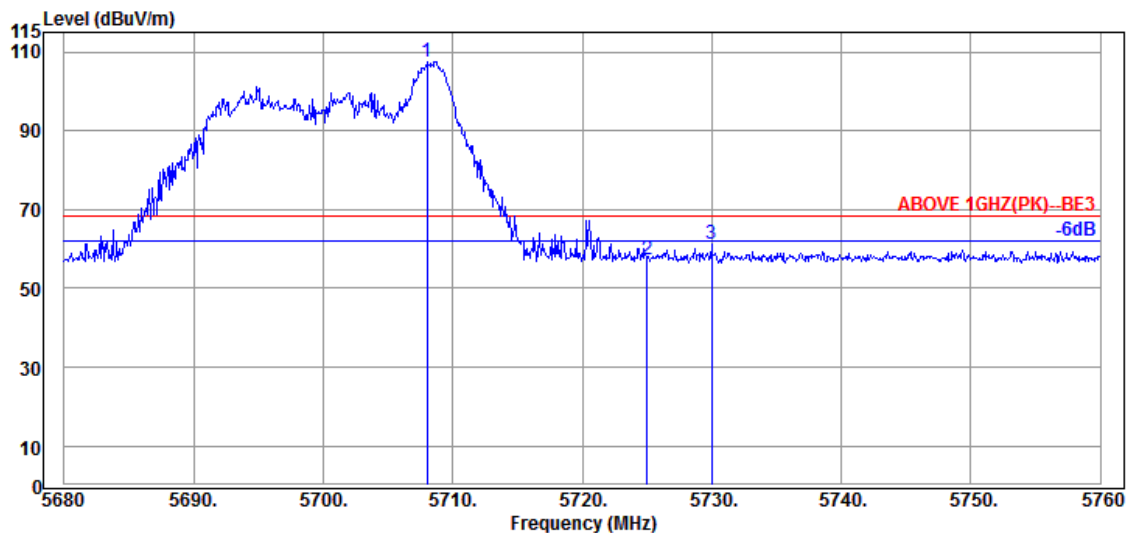

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.000               | 33.80                 | 9.19            | 39.30            | 103.93            | 107.62                  | ---             | ---         | Peak     |
| 5725.040                 | 33.80                 | 9.20            | 39.30            | 53.41             | 57.11                   | 68.20           | 11.09       | Peak     |
| 5730.000                 | 33.80                 | 9.20            | 39.31            | 57.39             | 61.08                   | 68.20           | 7.12        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 52/40         | Frequency  | TX 5700MHz |

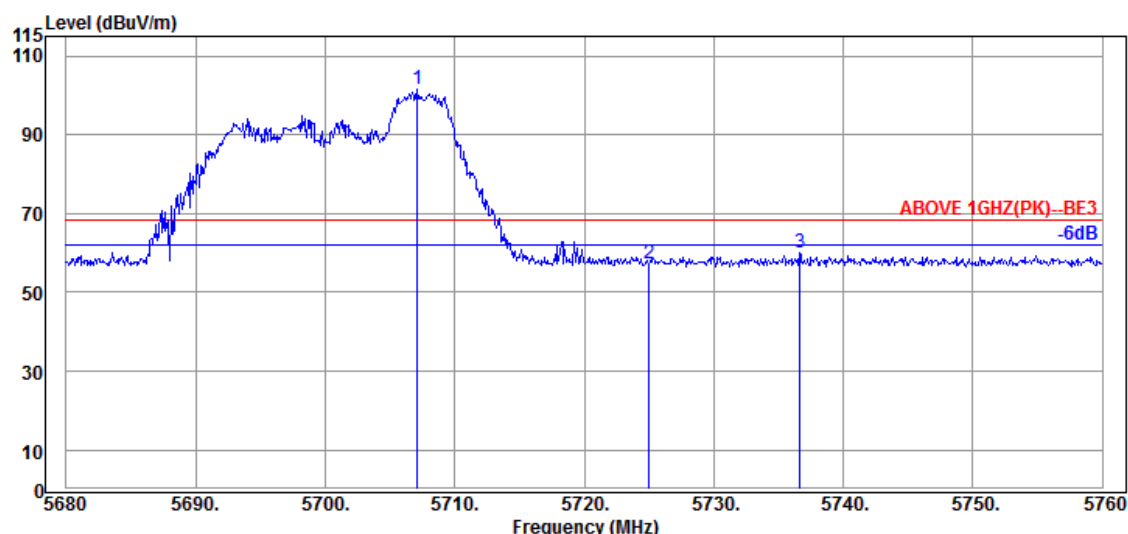

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5707.120               | 33.80                 | 9.19            | 39.30            | 97.75             | 101.44                  | ---             | ---         | Peak     |
| 5725.040                 | 33.80                 | 9.20            | 39.30            | 53.75             | 57.45                   | 68.20           | 10.75       | Peak     |
| 5736.640                 | 33.80                 | 9.20            | 39.31            | 56.31             | 60.00                   | 68.20           | 8.20        | Peak     |

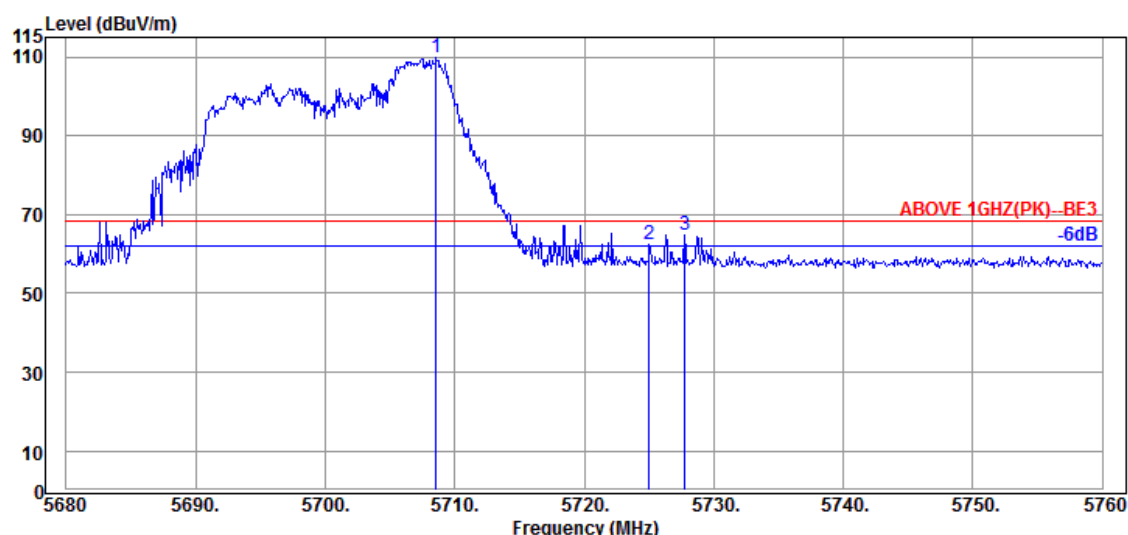

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.560               | 33.80                 | 9.19            | 39.30            | 106.26            | 109.95                  | ---             | ---         | Peak     |
| 5725.040                 | 33.80                 | 9.20            | 39.30            | 58.68             | 62.38                   | 68.20           | 5.82        | Peak     |
| 5727.760                 | 33.80                 | 9.20            | 39.31            | 61.24             | 64.93                   | 68.20           | 3.27        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 106/54        | Frequency  | TX 5700MHz |

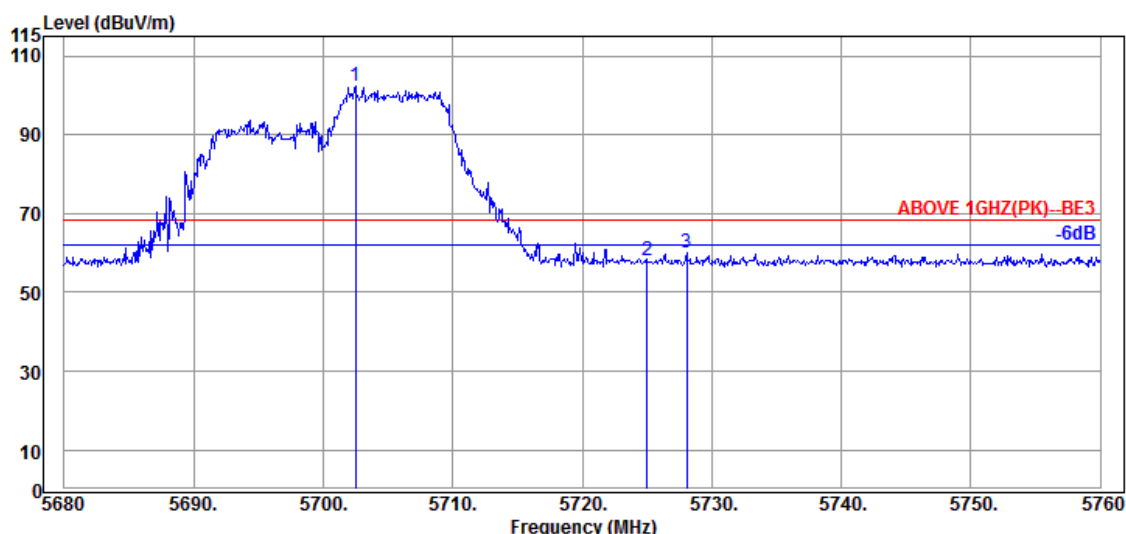

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5702.480               | 33.80                 | 9.18            | 39.30            | 98.62             | 102.30                  | ---             | ---         | Peak     |
| 5725.040                 | 33.80                 | 9.20            | 39.30            | 54.27             | 57.97                   | 68.20           | 10.23       | Peak     |
| 5728.080                 | 33.80                 | 9.20            | 39.31            | 56.24             | 59.93                   | 68.20           | 8.27        | Peak     |

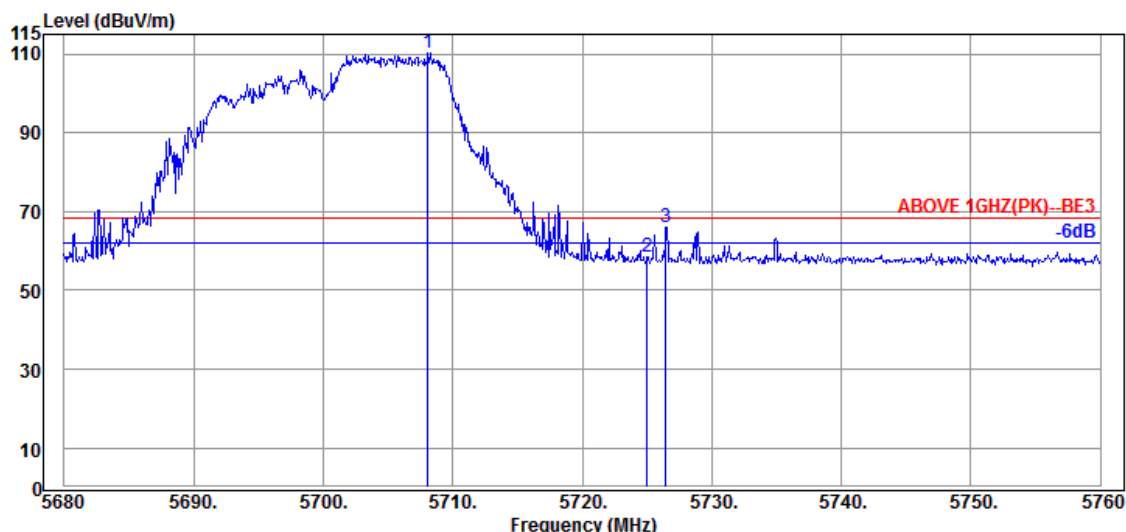

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.080               | 33.80                 | 9.19            | 39.30            | 106.70            | 110.39                  | ---             | ---         | Peak     |
| 5725.040                 | 33.80                 | 9.20            | 39.30            | 54.61             | 58.31                   | 68.20           | 9.89        | Peak     |
| 5726.480                 | 33.80                 | 9.20            | 39.31            | 62.42             | 66.11                   | 68.20           | 2.09        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 3          |
| RU Configuration | 26/0          | Frequency  | TX 5745MHz |

#### Antenna at Horizontal Polarization

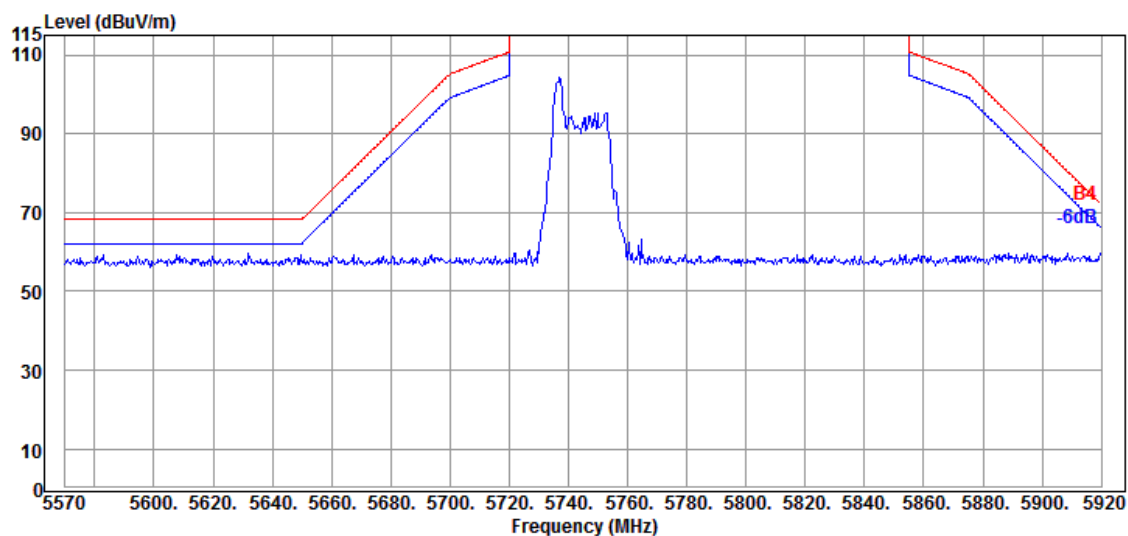

#### Antenna at Vertical Polarization

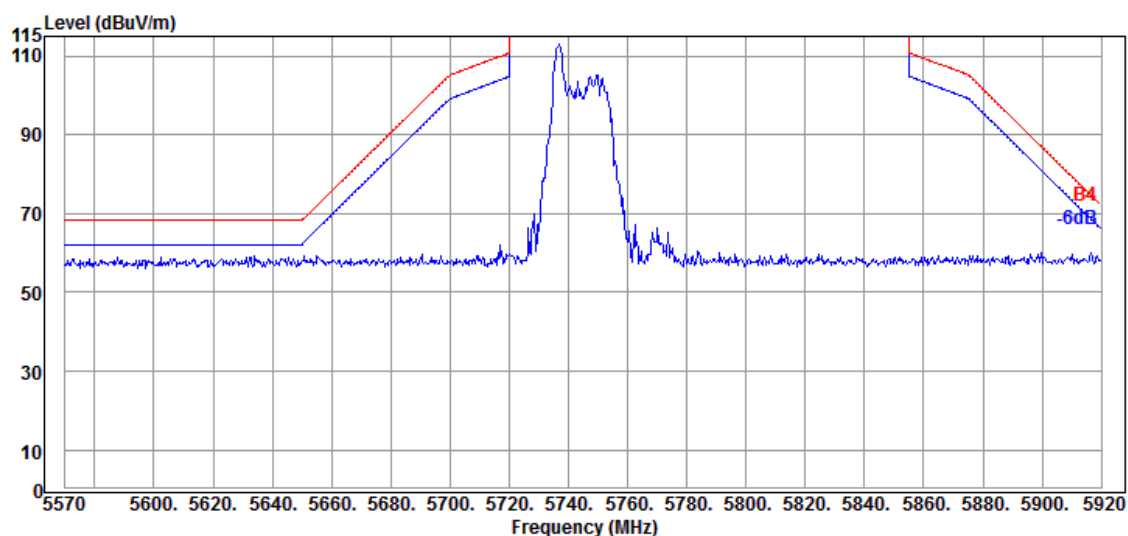


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 3          |
| RU Configuration | 52/37         | Frequency  | TX 5745MHz |

### Antenna at Horizontal Polarization

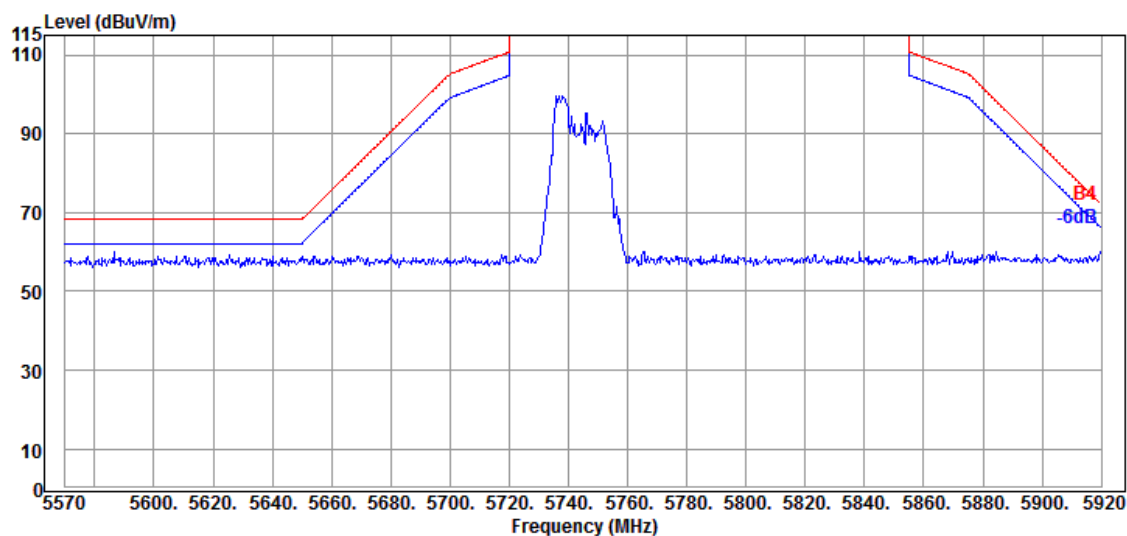

### Antenna at Vertical Polarization

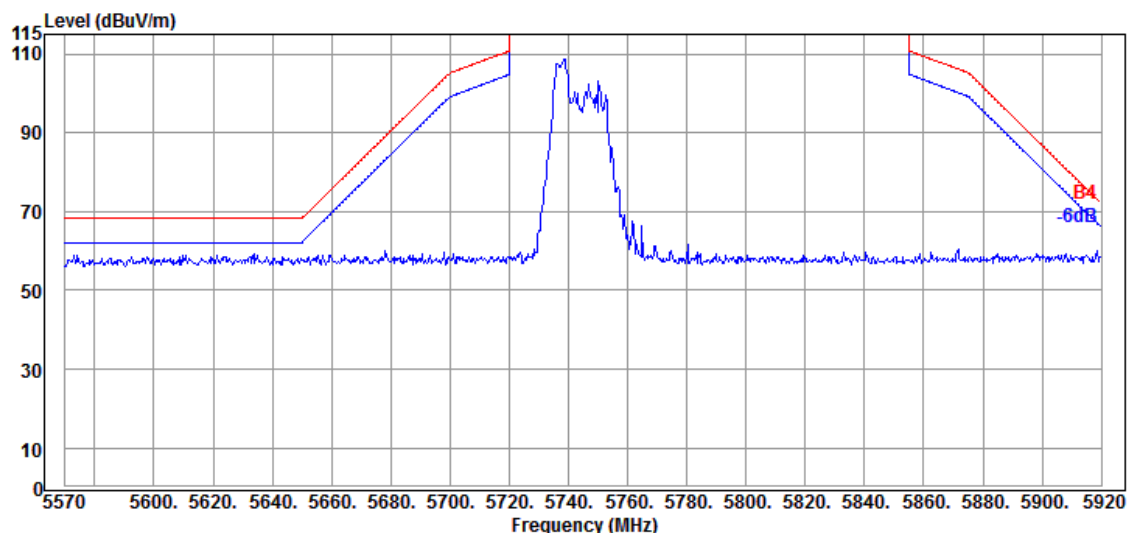


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 3          |
| RU Configuration | 106/53        | Frequency  | TX 5745MHz |

### Antenna at Horizontal Polarization

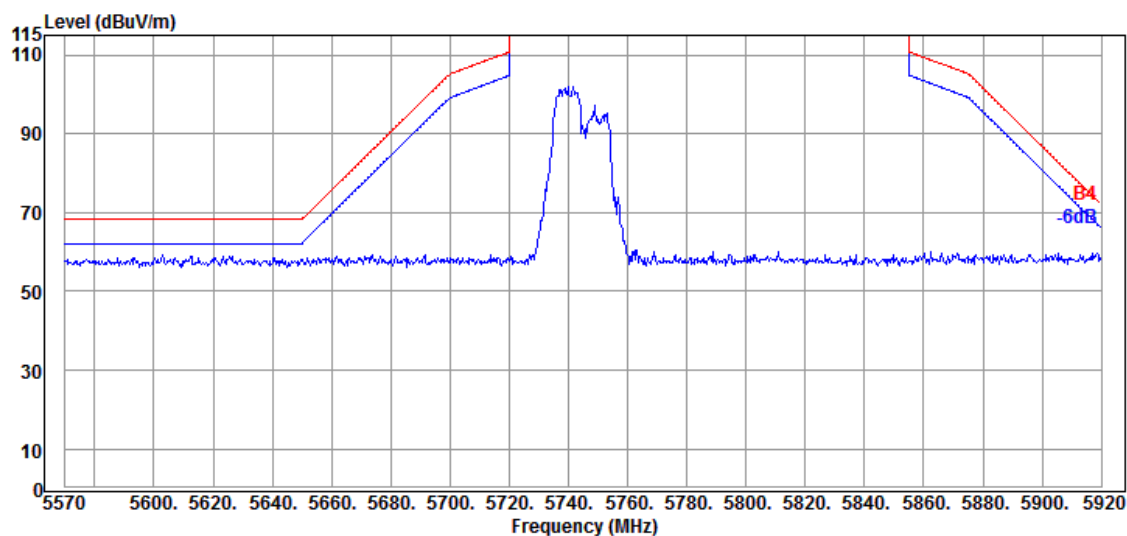

### Antenna at Vertical Polarization

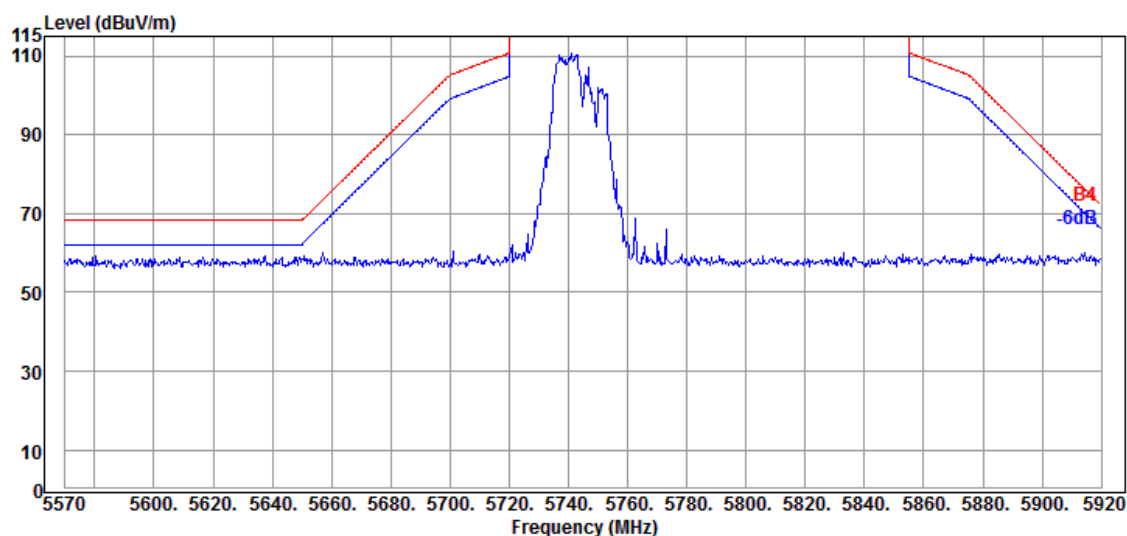


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 3          |
| RU Configuration | 26/8          | Frequency  | TX 5825MHz |

## Antenna at Horizontal Polarization

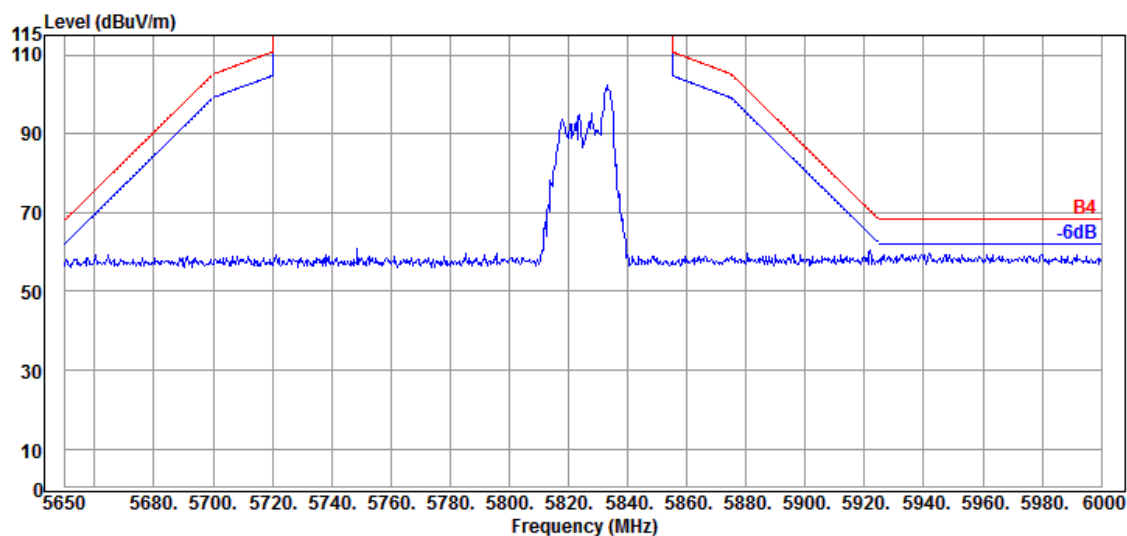


## Antenna at Vertical Polarization

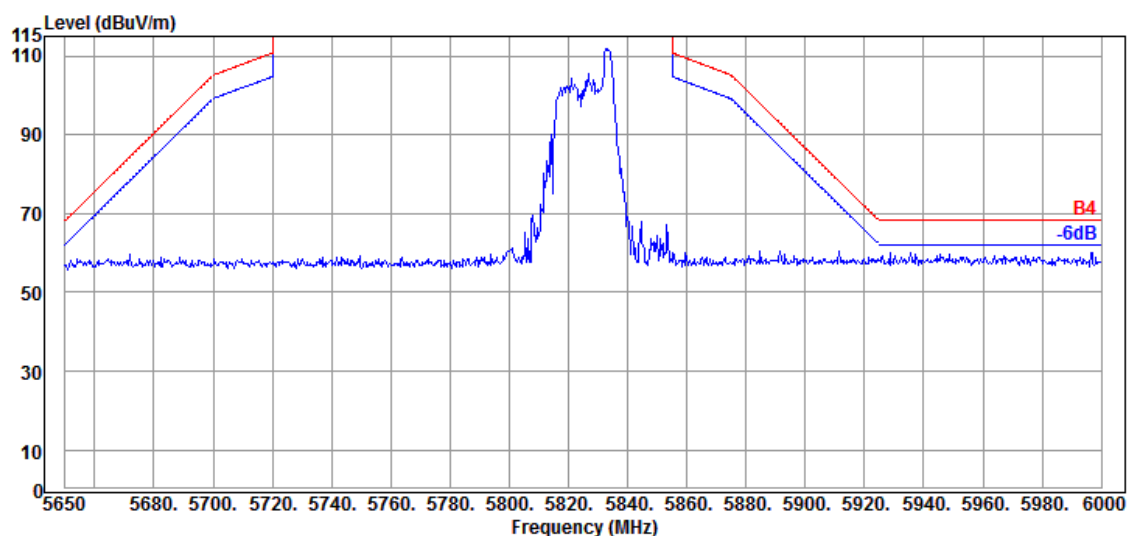


|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 3          |
| RU Configuration | 52/40         | Frequency  | TX 5825MHz |

## Antenna at Horizontal Polarization

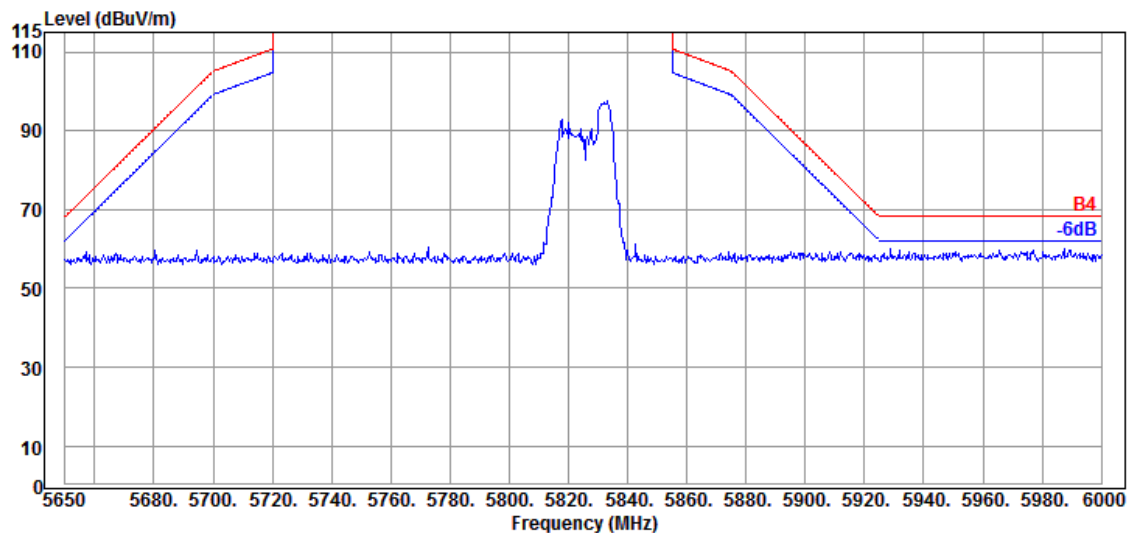

## Antenna at Vertical Polarization

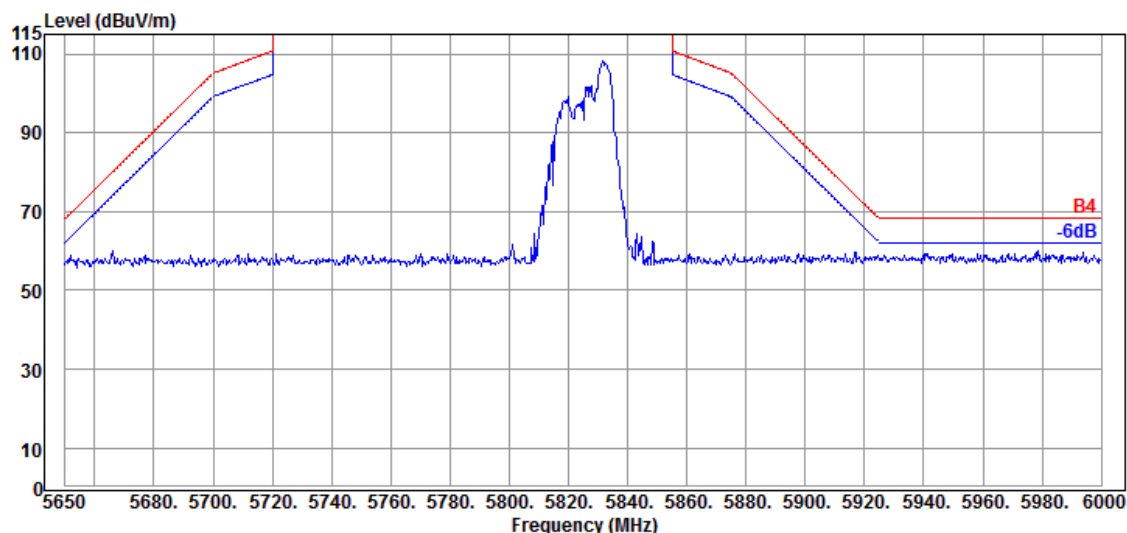


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 3          |
| RU Configuration | 106/54        | Frequency  | TX 5825MHz |

### Antenna at Horizontal Polarization

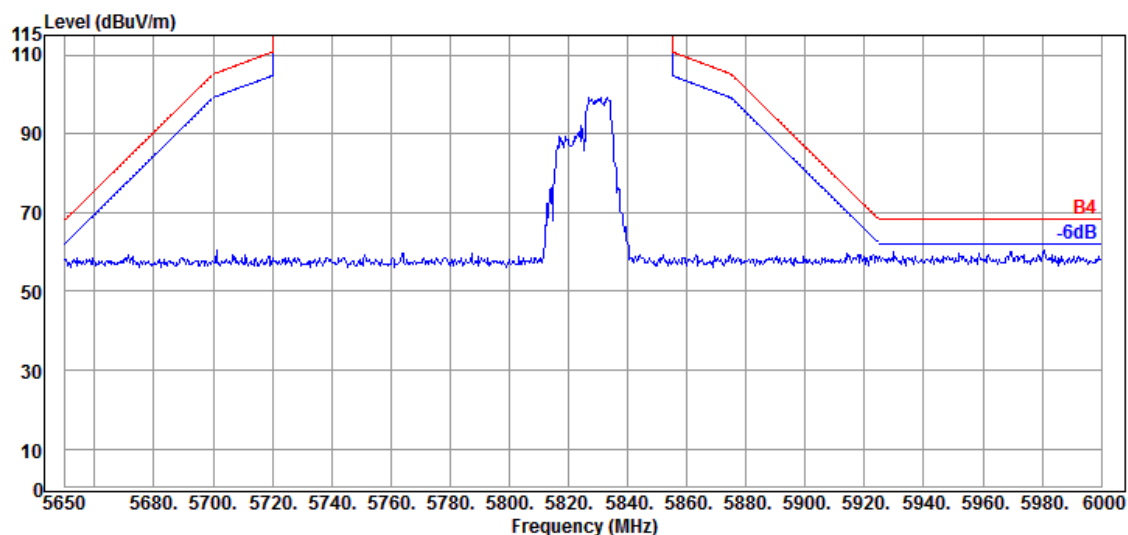

### Antenna at Vertical Polarization

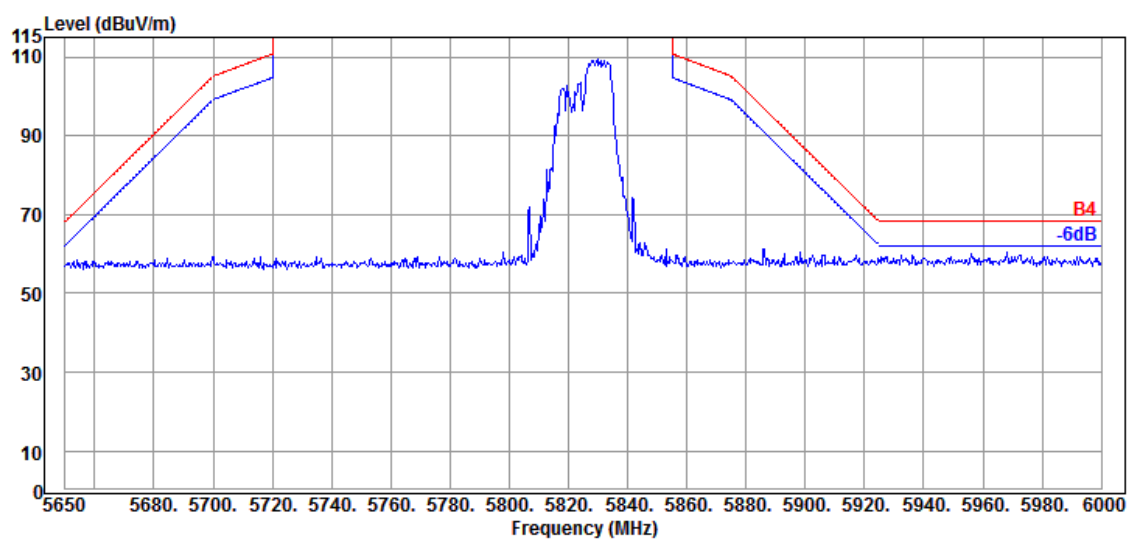

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 1          |
| RU Configuration | 242/61        | Frequency  | TX 5190MHz |

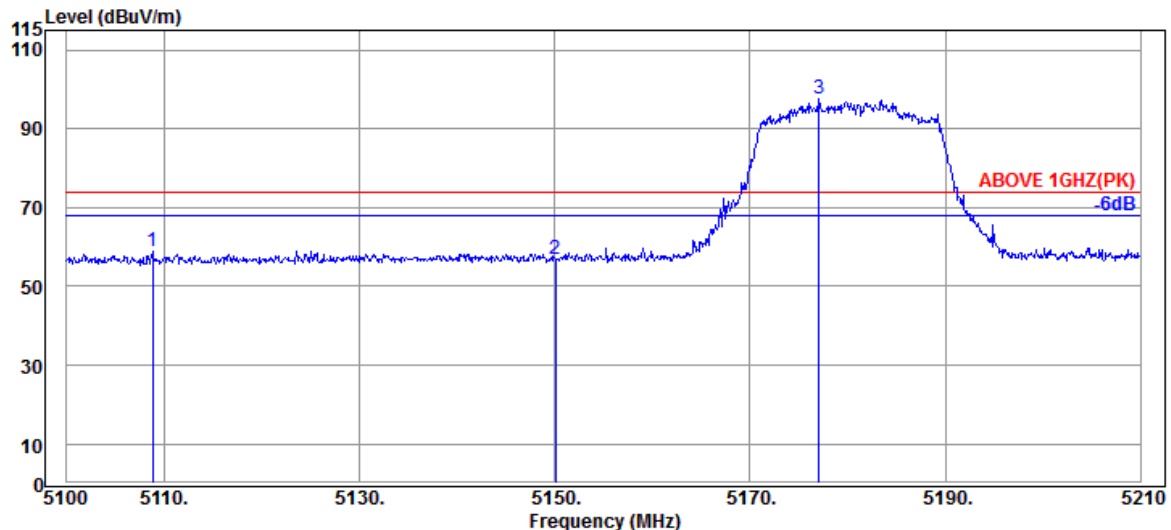

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5108.800                 | 33.70                 | 8.86            | 39.29            | 55.73             | 59.00                   | 74.00           | 15.00       | Peak     |
| 5150.050                 | 33.70                 | 8.88            | 39.29            | 53.55             | 56.84                   | 74.00           | 17.16       | Peak     |
| @ 5177.110               | 33.70                 | 8.90            | 39.28            | 94.13             | 97.45                   | ---             | ---         | Peak     |

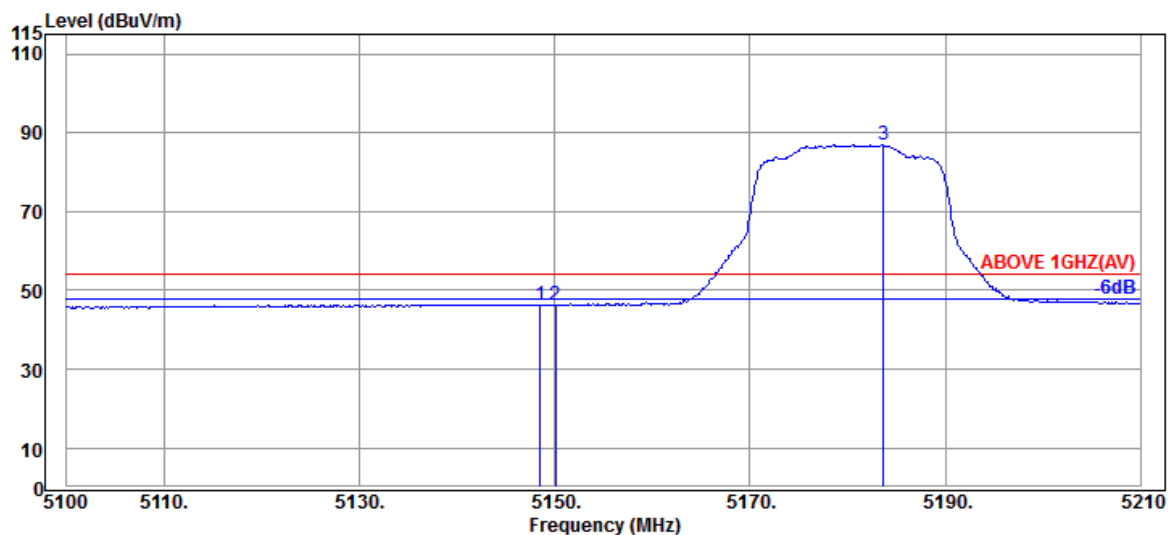

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.510                 | 33.70                 | 8.88            | 39.29            | 43.12             | 46.41                   | 54.00           | 7.59        | Average  |
| 5150.050                 | 33.70                 | 8.88            | 39.29            | 43.13             | 46.42                   | 54.00           | 7.58        | Average  |
| @ 5183.710               | 33.70                 | 8.90            | 39.28            | 83.65             | 86.97                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 1          |
| RU Configuration | 242/61        | Frequency  | TX 5190MHz |

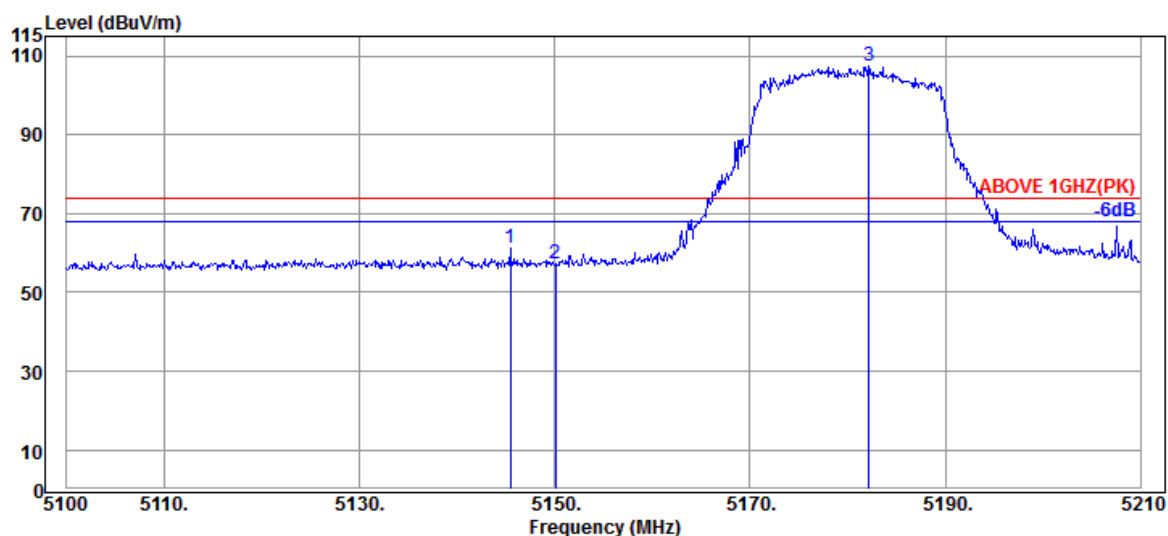

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.430                 | 33.70                 | 8.88            | 39.29                  | 57.91             | 61.20                   | 74.00           | 12.80       | Peak     |
| 5150.050                 | 33.70                 | 8.88            | 39.29                  | 53.93             | 57.22                   | 74.00           | 16.78       | Peak     |
| @ 5182.170               | 33.70                 | 8.90            | 39.28                  | 104.15            | 107.47                  | ---             | ---         | Peak     |

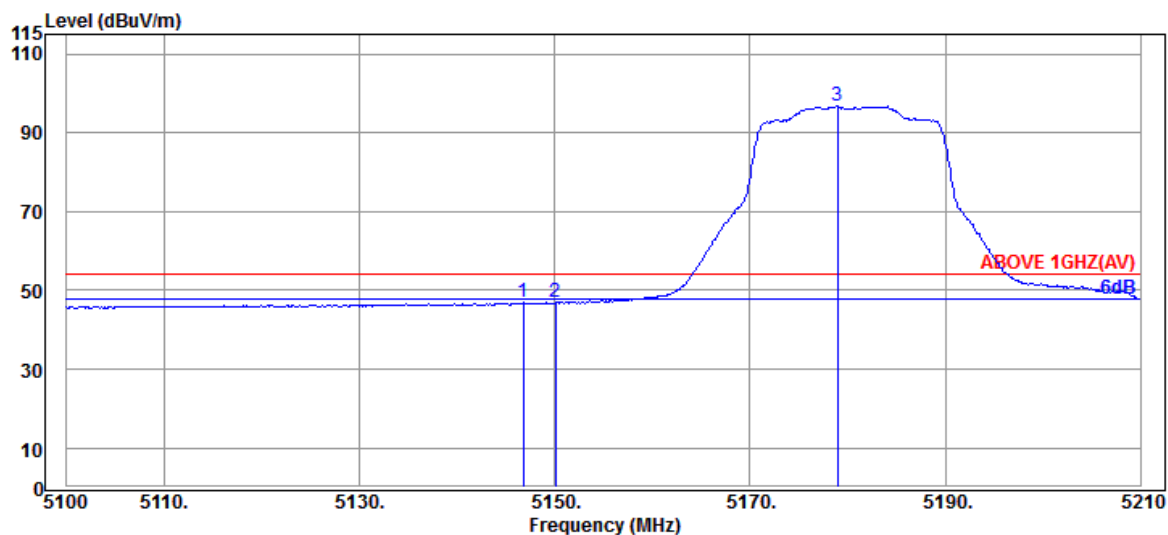

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.750                 | 33.70                 | 8.88            | 39.29                  | 43.59             | 46.88                   | 54.00           | 7.12        | Average  |
| 5150.050                 | 33.70                 | 8.88            | 39.29                  | 43.54             | 46.83                   | 54.00           | 7.17        | Average  |
| @ 5178.980               | 33.70                 | 8.90            | 39.28                  | 93.51             | 96.83                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2A         |
| RU Configuration | 242/62        | Frequency  | TX 5310MHz |

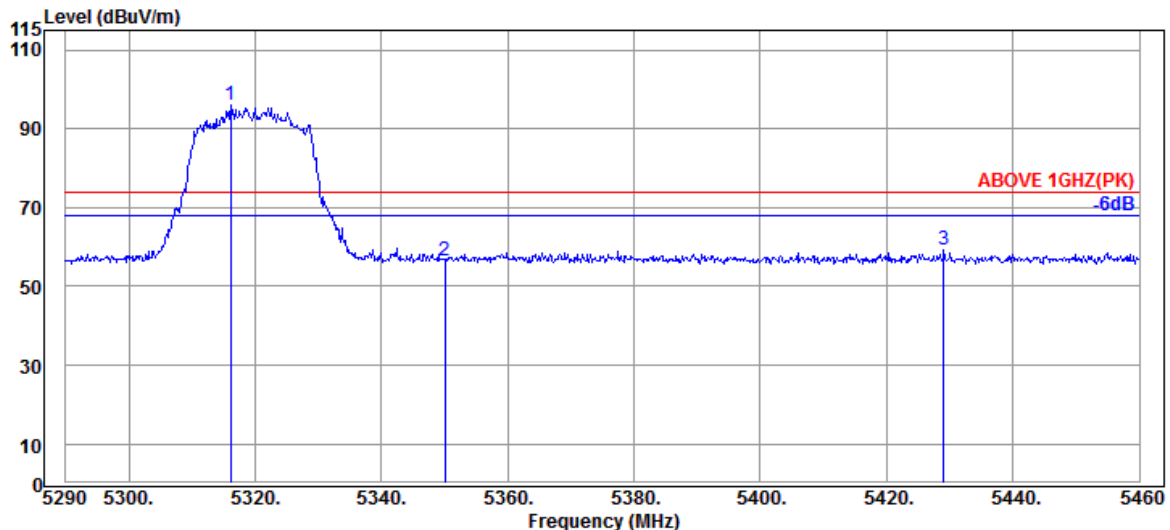

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.180               | 34.03                 | 8.98            | 39.27                  | 92.11             | 95.85                   | ---             | ---         | Peak     |
| 5350.010                 | 33.90                 | 8.99            | 39.27                  | 52.92             | 56.54                   | 74.00           | 17.46       | Peak     |
| 5429.060                 | 34.15                 | 9.04            | 39.27                  | 55.51             | 59.43                   | 74.00           | 14.57       | Peak     |

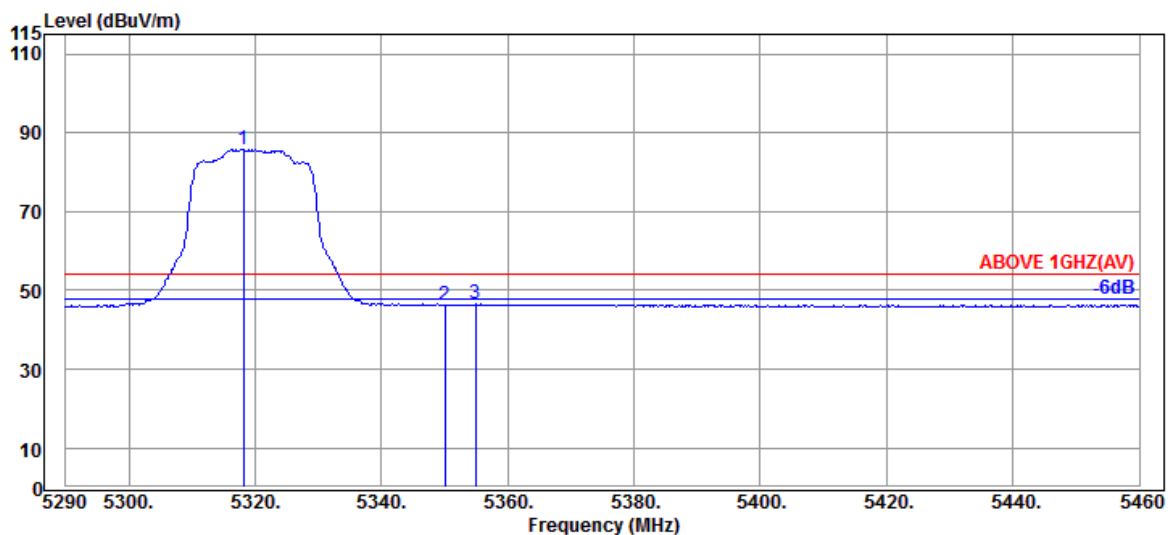

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.220               | 34.03                 | 8.98            | 39.27                  | 82.10             | 85.84                   | ---             | ---         | Average  |
| 5350.010                 | 33.90                 | 8.99            | 39.27                  | 42.54             | 46.16                   | 54.00           | 7.84        | Average  |
| 5354.940                 | 33.97                 | 9.00            | 39.27                  | 42.87             | 46.57                   | 54.00           | 7.43        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2A         |
| RU Configuration | 242/62        | Frequency  | TX 5310MHz |

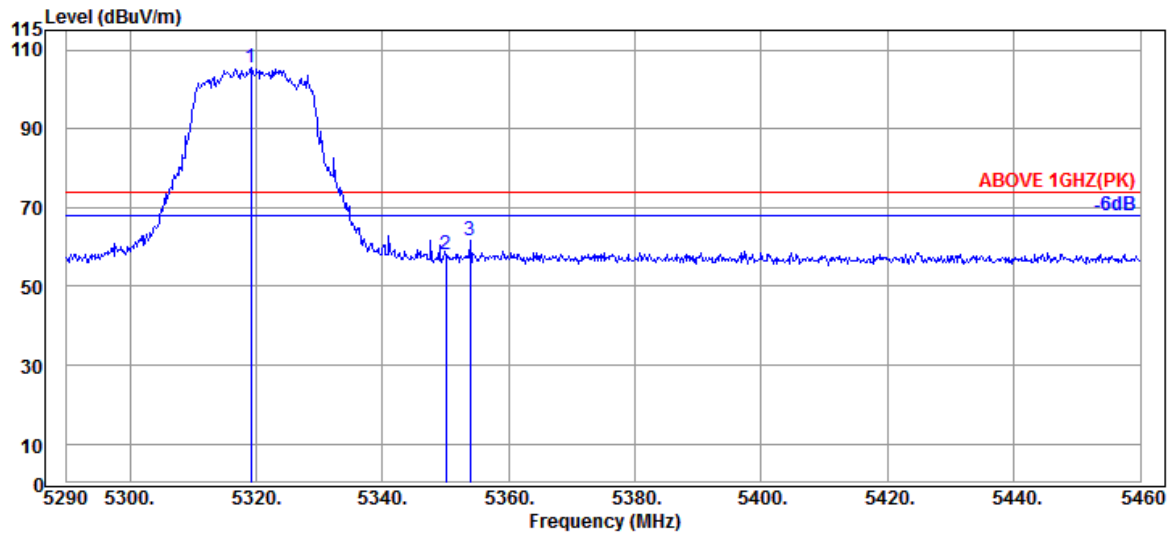

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5319.240               | 34.03                 | 8.98            | 39.27                  | 101.66            | 105.40                  | ---             | ---         | Peak     |
| 5350.010                 | 33.90                 | 8.99            | 39.27                  | 54.56             | 58.18                   | 74.00           | 15.82       | Peak     |
| 5353.920                 | 33.90                 | 8.99            | 39.27                  | 57.87             | 61.49                   | 74.00           | 12.51       | Peak     |

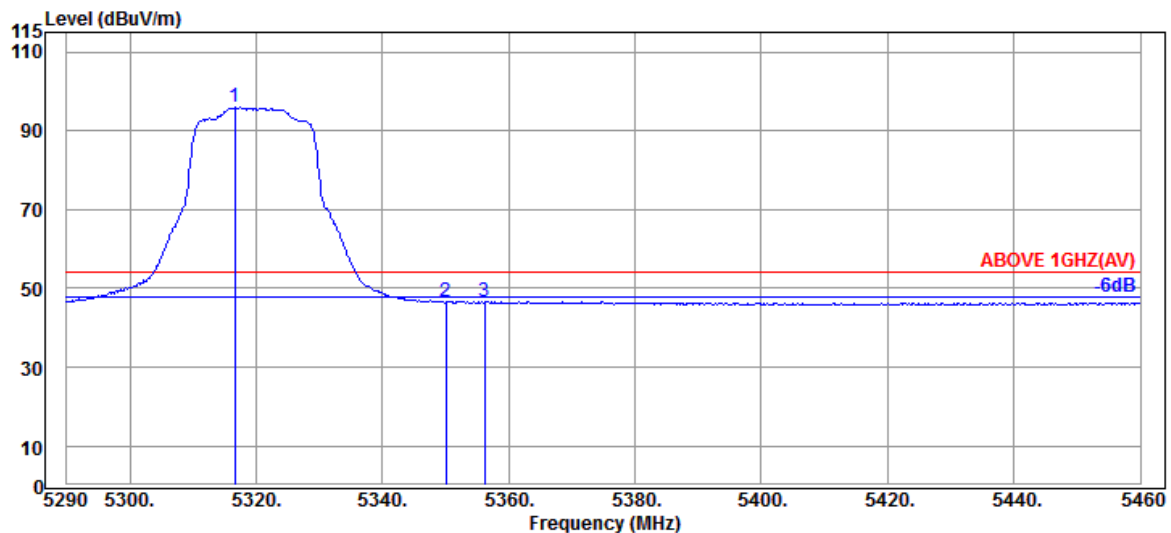

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.690               | 34.03                 | 8.98            | 39.27                  | 92.17             | 95.91                   | ---             | ---         | Average  |
| 5350.010                 | 33.90                 | 8.99            | 39.27                  | 43.11             | 46.73                   | 54.00           | 7.27        | Average  |
| 5356.130                 | 33.97                 | 9.00            | 39.27                  | 42.99             | 46.69                   | 54.00           | 7.31        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2C         |
| RU Configuration | 242/61        | Frequency  | TX 5510MHz |

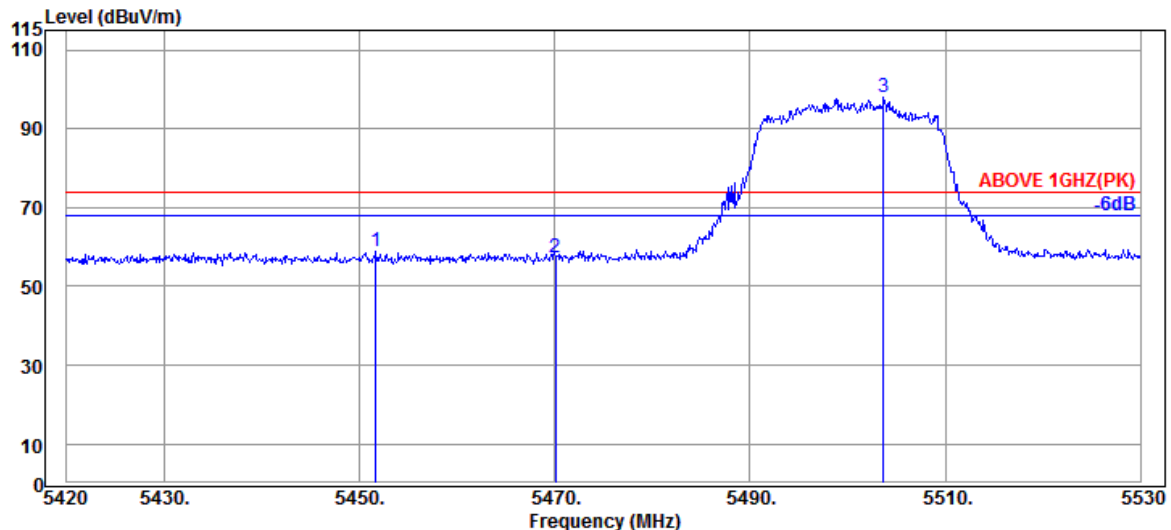

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5451.680                 | 34.20                 | 9.05            | 39.26                  | 55.01             | 59.00                   | 74.00           | 15.00       | Peak     |
| 5470.050                 | 34.17                 | 9.06            | 39.26                  | 53.43             | 57.40                   | 74.00           | 16.60       | Peak     |
| @ 5503.710               | 34.10                 | 9.08            | 39.26                  | 93.99             | 97.91                   | ---             | ---         | Peak     |

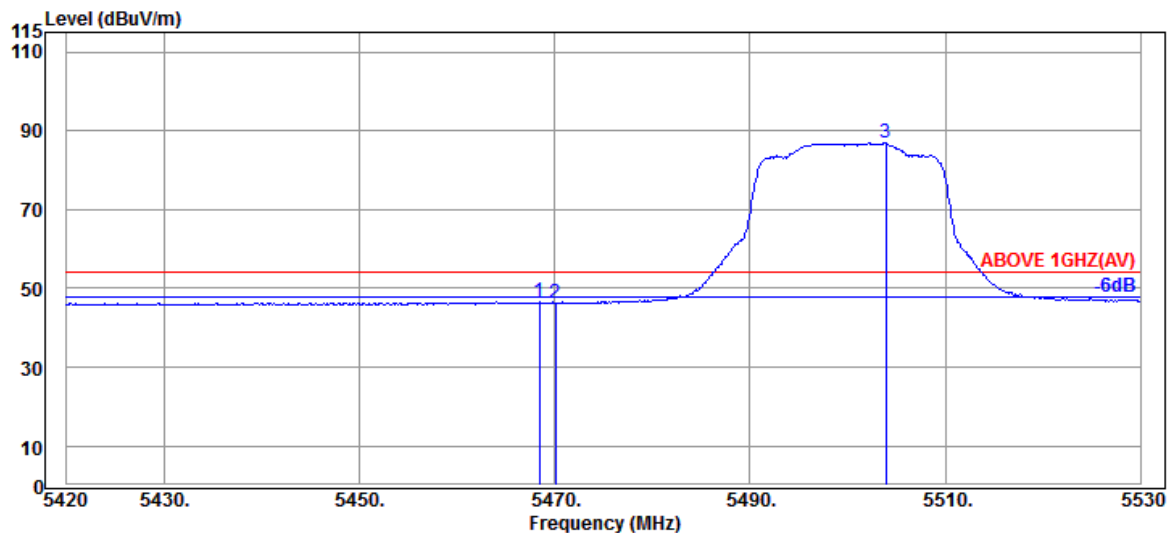

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.400                 | 34.17                 | 9.06            | 39.26                  | 42.57             | 46.54                   | 54.00           | 7.46        | Average  |
| 5470.050                 | 34.17                 | 9.06            | 39.26                  | 42.38             | 46.35                   | 54.00           | 7.65        | Average  |
| @ 5503.930               | 34.10                 | 9.08            | 39.26                  | 83.03             | 86.95                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2C         |
| RU Configuration | 242/61        | Frequency  | TX 5510MHz |

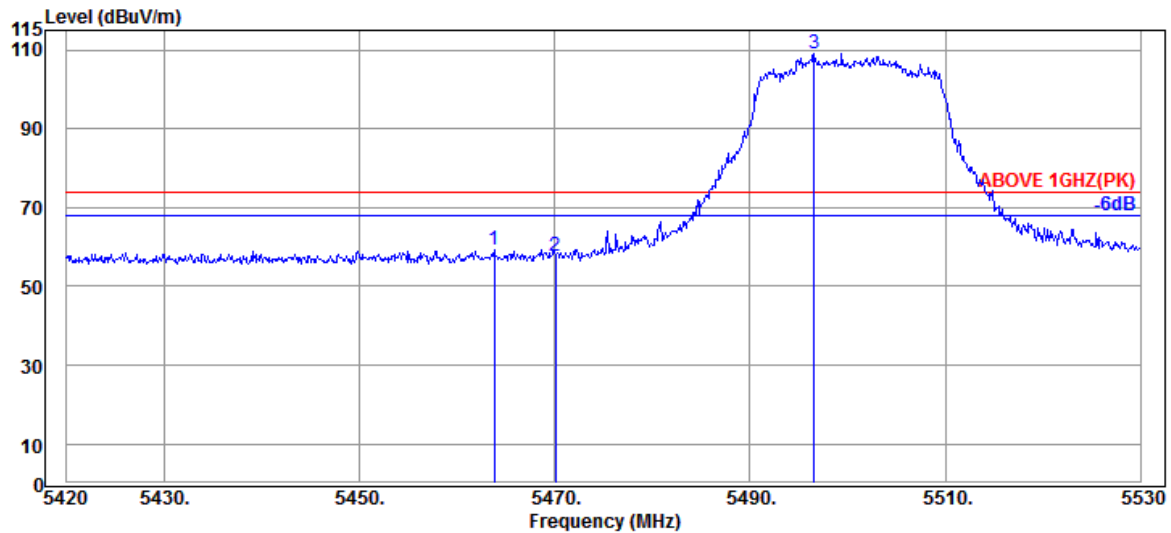

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5463.780                 | 34.17                 | 9.06            | 39.26                  | 55.35             | 59.32                   | 74.00           | 14.68       | Peak     |
| 5470.050                 | 34.17                 | 9.06            | 39.26                  | 53.76             | 57.73                   | 74.00           | 16.27       | Peak     |
| @ 5496.560               | 34.10                 | 9.08            | 39.26                  | 105.17            | 109.09                  | ---             | ---         | Peak     |

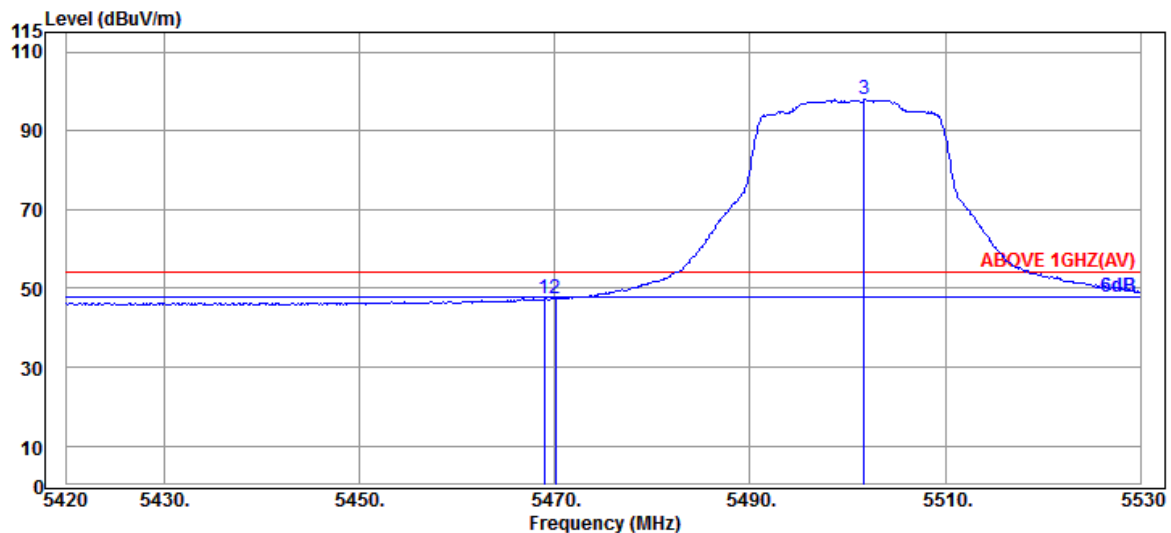

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.950                 | 34.17                 | 9.06            | 39.26                  | 43.31             | 47.28                   | 54.00           | 6.72        | Average  |
| 5470.050                 | 34.17                 | 9.06            | 39.26                  | 43.40             | 47.37                   | 54.00           | 6.63        | Average  |
| @ 5501.730               | 34.10                 | 9.08            | 39.26                  | 93.97             | 97.89                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2C         |
| RU Configuration | 242/62        | Frequency  | TX 5670MHz |

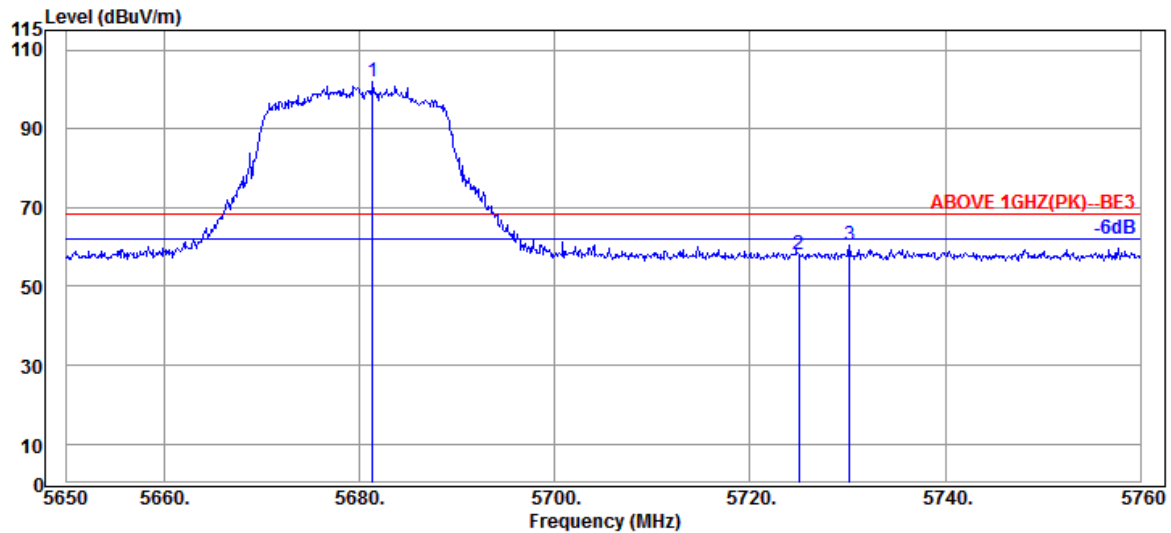

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5681.350               | 33.87                 | 9.17            | 39.30                  | 98.28             | 102.02                  | ---             | ---         | Peak     |
| 5725.020                 | 33.80                 | 9.20            | 39.30                  | 54.39             | 58.09                   | 68.20           | 10.11       | Peak     |
| 5730.190                 | 33.80                 | 9.20            | 39.31                  | 56.62             | 60.31                   | 68.20           | 7.89        | Peak     |

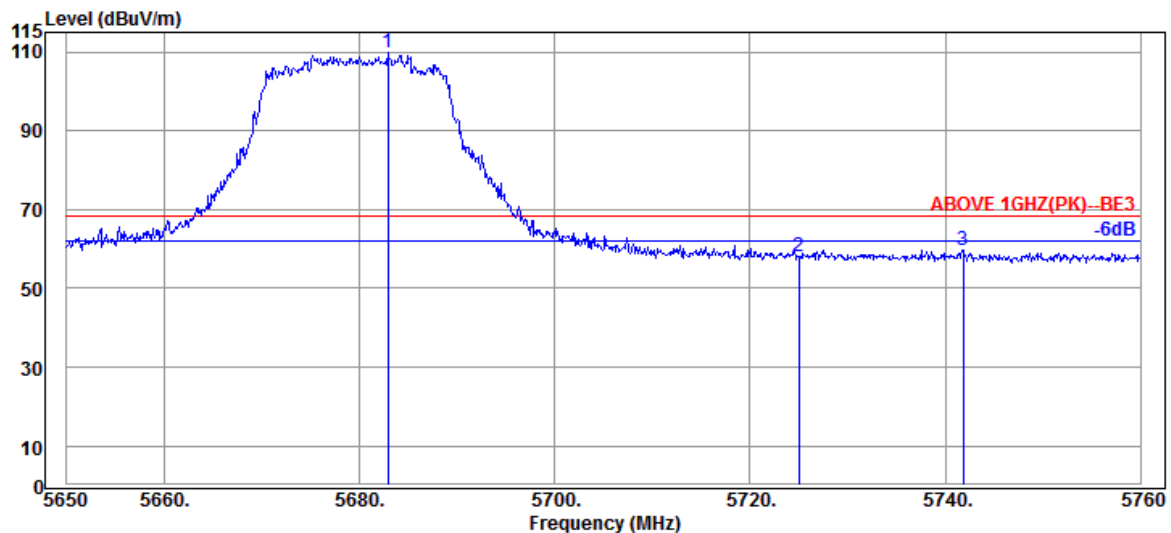

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5682.890               | 33.87                 | 9.17            | 39.30                  | 106.25            | 109.99                  | ---             | ---         | Peak     |
| 5725.020                 | 33.80                 | 9.20            | 39.30                  | 54.42             | 58.12                   | 68.20           | 10.08       | Peak     |
| 5741.850                 | 33.80                 | 9.20            | 39.31                  | 56.09             | 59.78                   | 68.20           | 8.42        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 3          |
| RU Configuration | 242/61        | Frequency  | TX 5755MHz |

#### Antenna at Horizontal Polarization

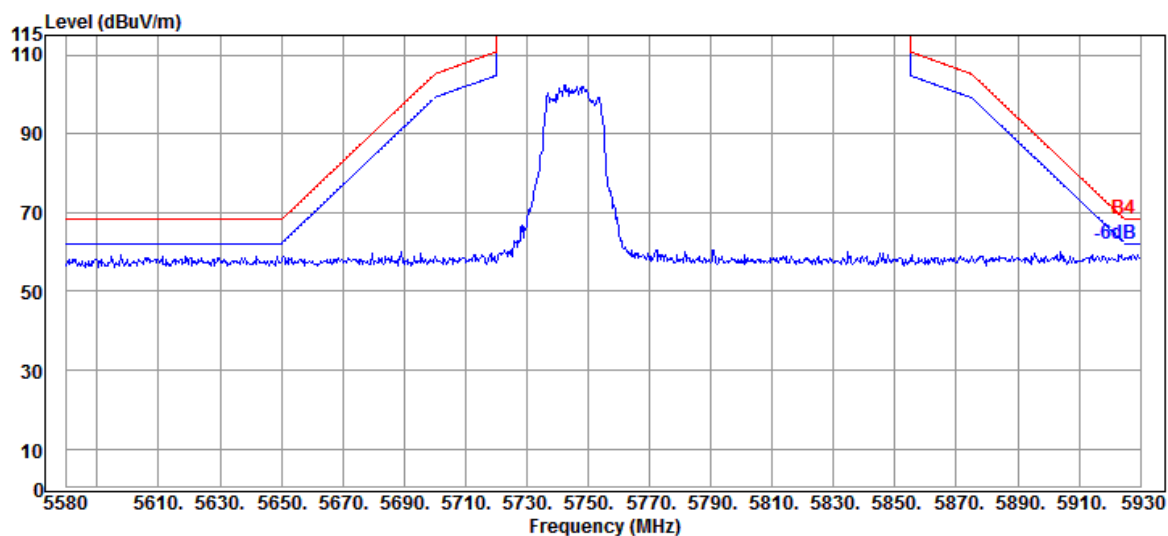

#### Antenna at Vertical Polarization

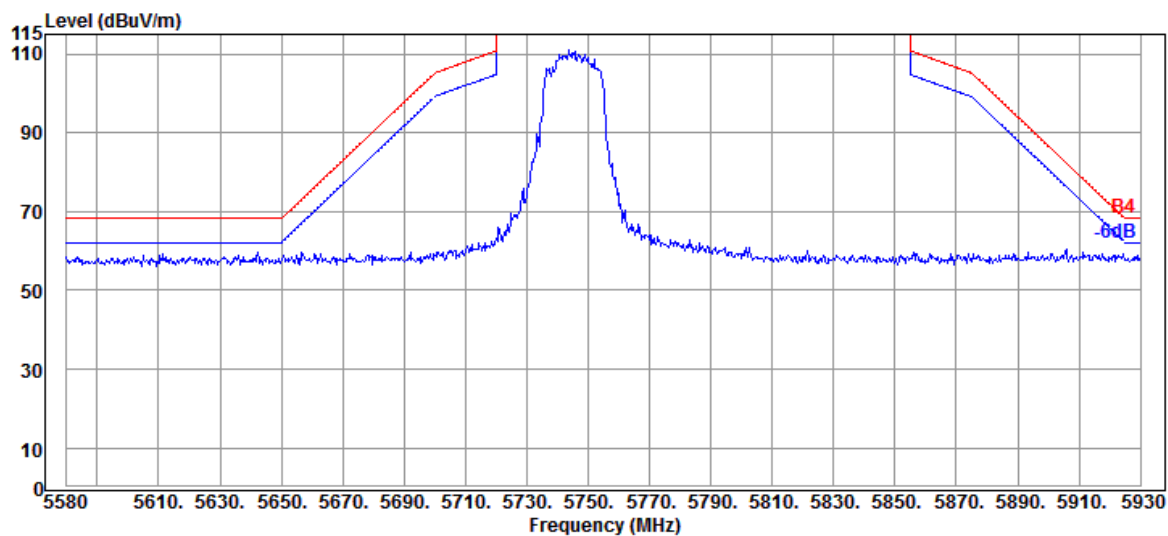


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 3          |
| RU Configuration | 242/62        | Frequency  | TX 5795MHz |

## Antenna at Horizontal Polarization

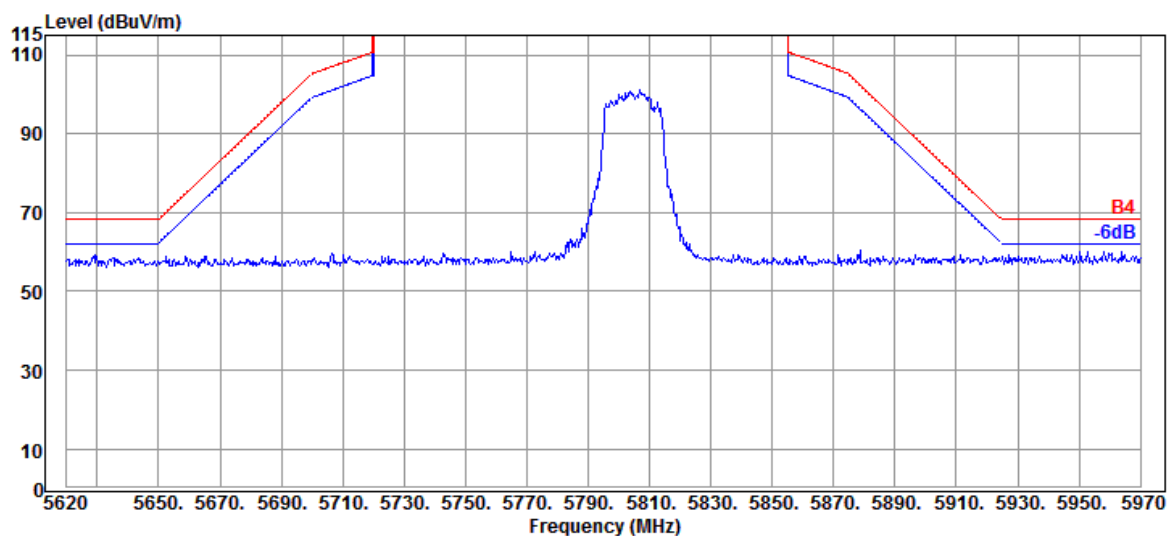

## Antenna at Vertical Polarization

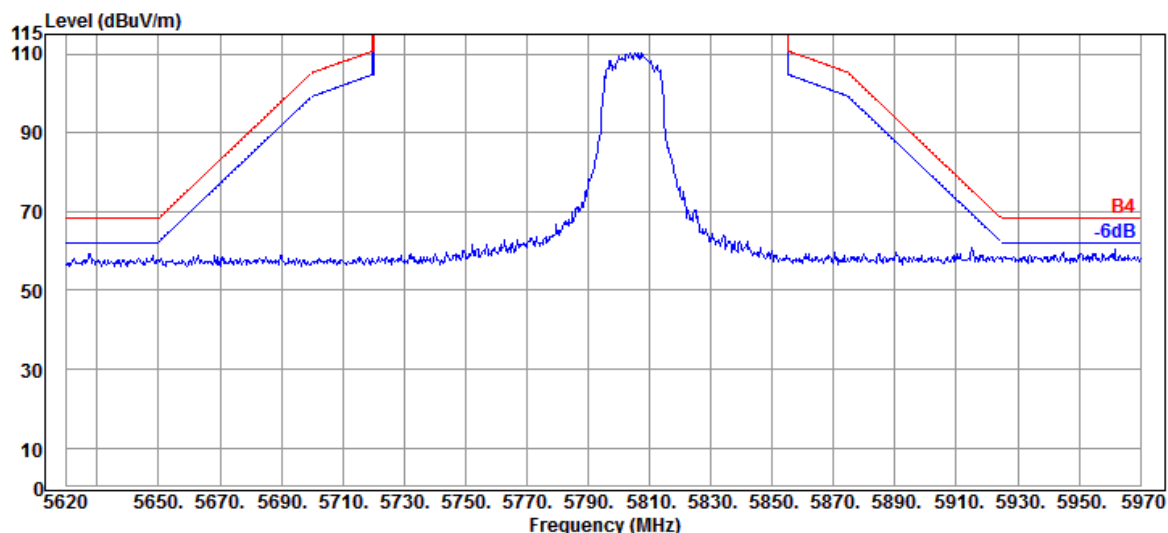


**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 1          |
| RU Configuration | 484/65        | Frequency  | TX 5210MHz |

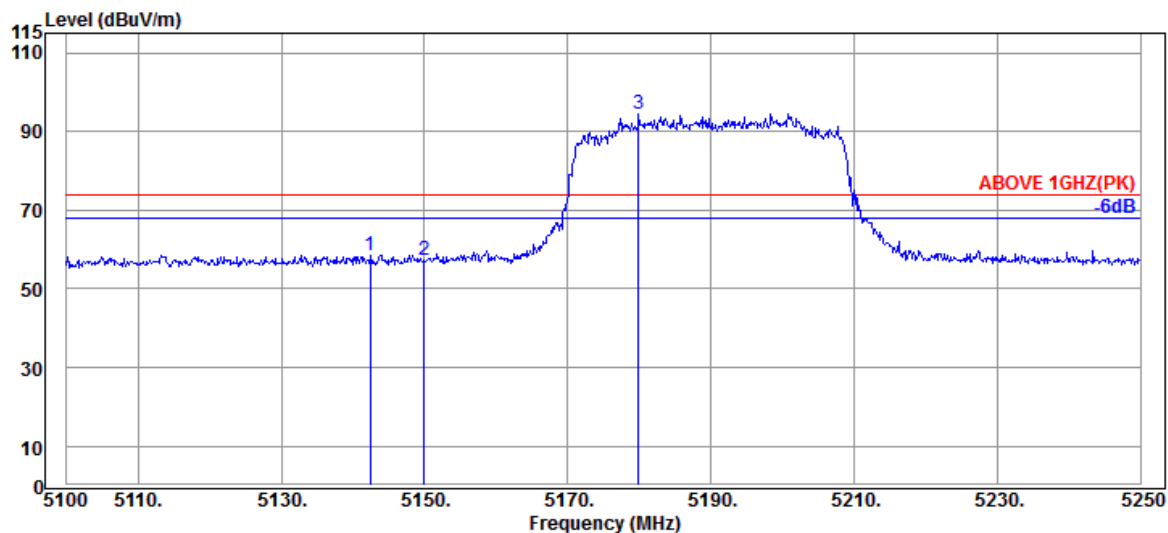

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5142.450                 | 33.70                 | 8.88            | 39.29                  | 55.37             | 58.66                   | 74.00           | 15.34       | Peak     |
| 5149.950                 | 33.70                 | 8.88            | 39.29                  | 53.91             | 57.20                   | 74.00           | 16.80       | Peak     |
| @ 5179.950               | 33.70                 | 8.90            | 39.28                  | 91.31             | 94.63                   | ---             | ---         | Peak     |

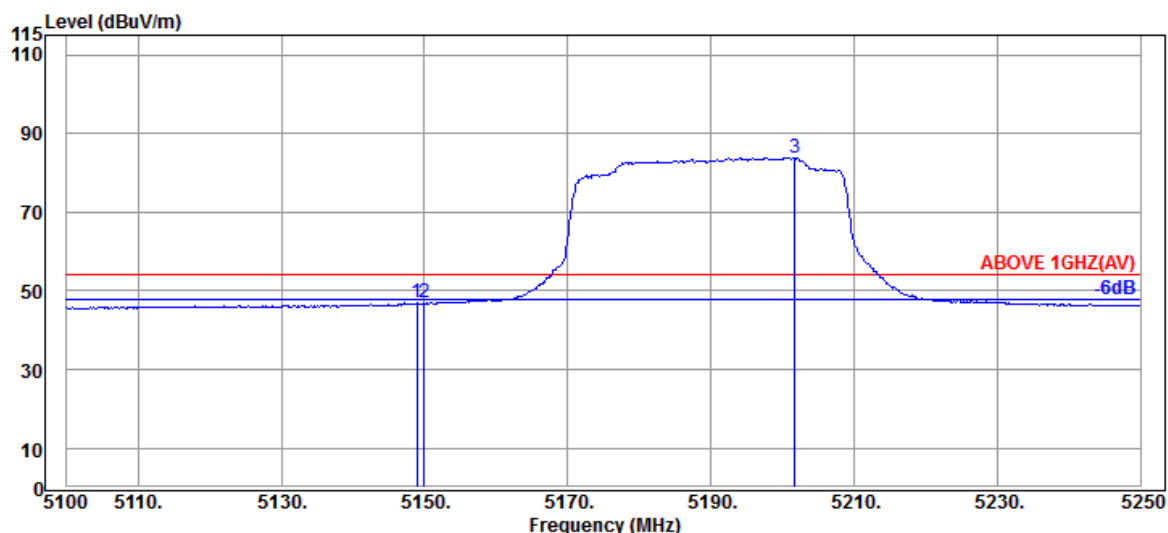

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.900                 | 33.70                 | 8.88            | 39.29                  | 43.66             | 46.95                   | 54.00           | 7.05        | Average  |
| 5149.950                 | 33.70                 | 8.88            | 39.29                  | 43.68             | 46.97                   | 54.00           | 7.03        | Average  |
| @ 5201.700               | 33.72                 | 8.92            | 39.28                  | 80.46             | 83.82                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2207001

Report Number: EM-F220532


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 1          |
| RU Configuration | 484/65        | Frequency  | TX 5210MHz |

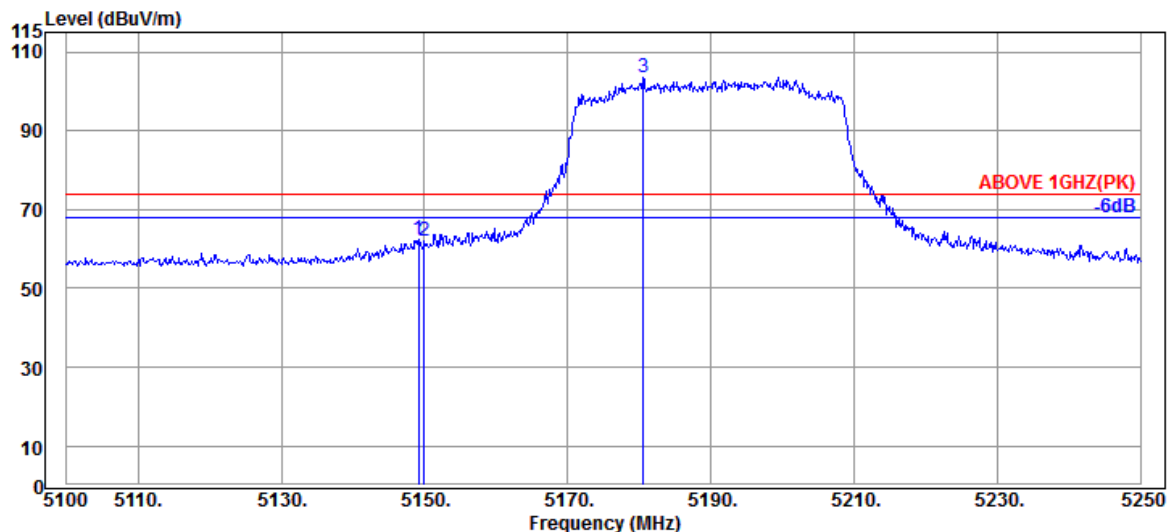

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.200                 | 33.70                 | 8.88            | 39.29                  | 59.07             | 62.36                   | 74.00           | 11.64       | Peak     |
| 5149.950                 | 33.70                 | 8.88            | 39.29                  | 58.85             | 62.14                   | 74.00           | 11.86       | Peak     |
| @ 5180.550               | 33.70                 | 8.90            | 39.28                  | 100.23            | 103.55                  | ---             | ---         | Peak     |

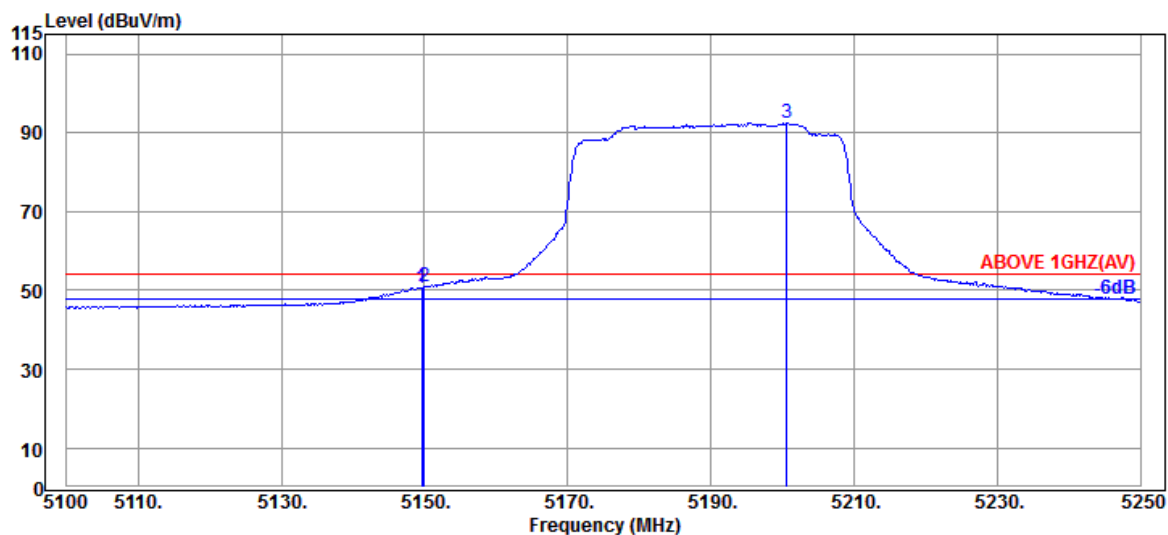

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.650                 | 33.70                 | 8.88            | 39.29                  | 47.45             | 50.74                   | 54.00           | 3.26        | Average  |
| 5149.950                 | 33.70                 | 8.88            | 39.29                  | 47.54             | 50.83                   | 54.00           | 3.17        | Average  |
| @ 5200.650               | 33.70                 | 8.91            | 39.28                  | 89.13             | 92.46                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2A         |
| RU Configuration | 484/66        | Frequency  | TX 5290MHz |

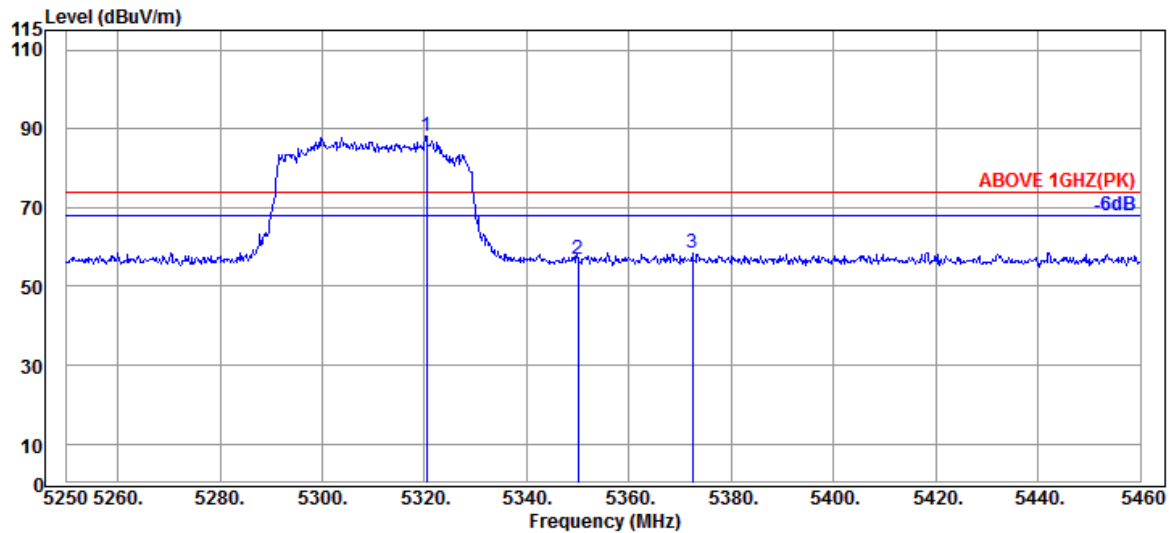

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5320.350               | 34.03                 | 8.98            | 39.27            | 84.41             | 88.15                   | ---             | ---         | Peak     |
| 5349.960                 | 33.90                 | 8.99            | 39.27            | 53.20             | 56.82                   | 74.00           | 17.18       | Peak     |
| 5372.430                 | 34.03                 | 9.01            | 39.27            | 54.87             | 58.64                   | 74.00           | 15.36       | Peak     |

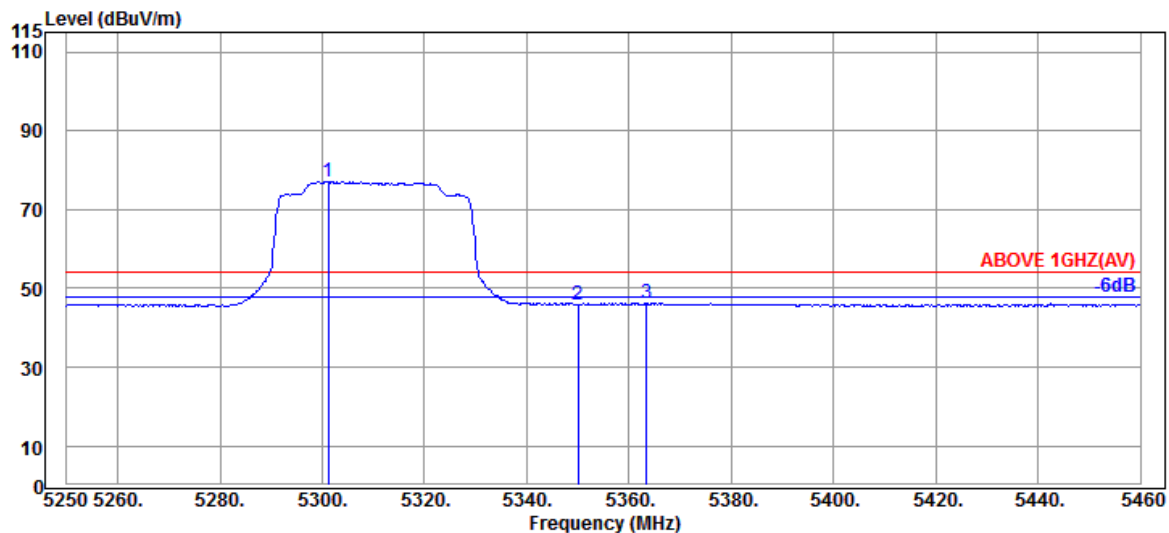

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5301.240               | 34.10                 | 8.97            | 39.28            | 73.41             | 77.20                   | ---             | ---         | Average  |
| 5349.960                 | 33.90                 | 8.99            | 39.27            | 42.36             | 45.98                   | 54.00           | 8.02        | Average  |
| 5363.400                 | 33.97                 | 9.00            | 39.27            | 42.53             | 46.23                   | 54.00           | 7.77        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2A         |
| RU Configuration | 484/66        | Frequency  | TX 5290MHz |

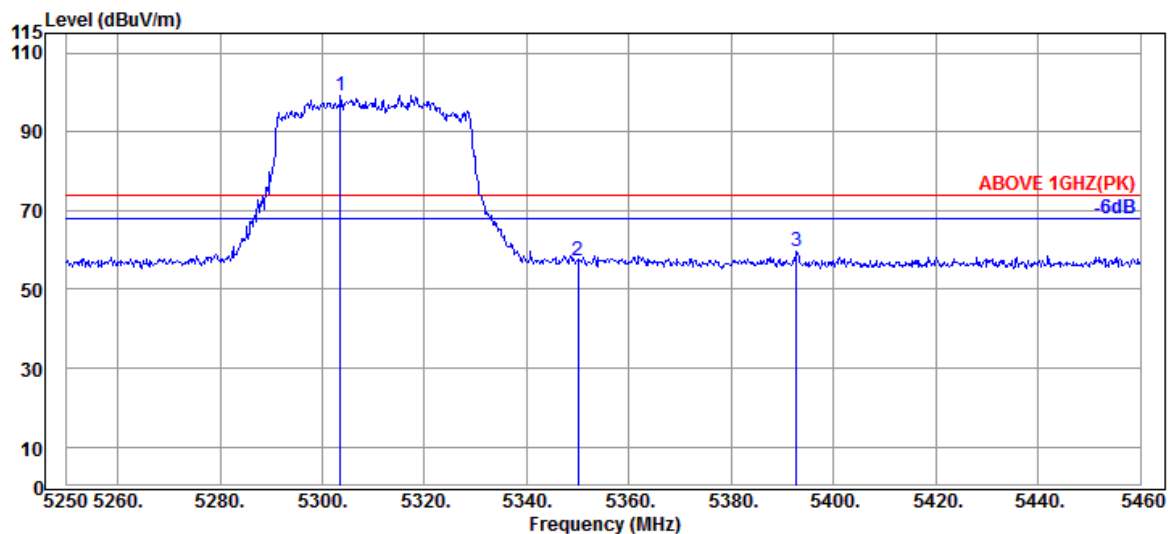

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5303.550               | 34.10                 | 8.97            | 39.28                  | 95.41             | 99.20                   | ---             | ---         | Peak     |
| 5349.960                 | 33.90                 | 8.99            | 39.27                  | 53.51             | 57.13                   | 74.00           | 16.87       | Peak     |
| 5392.800                 | 34.10                 | 9.02            | 39.27                  | 55.79             | 59.64                   | 74.00           | 14.36       | Peak     |

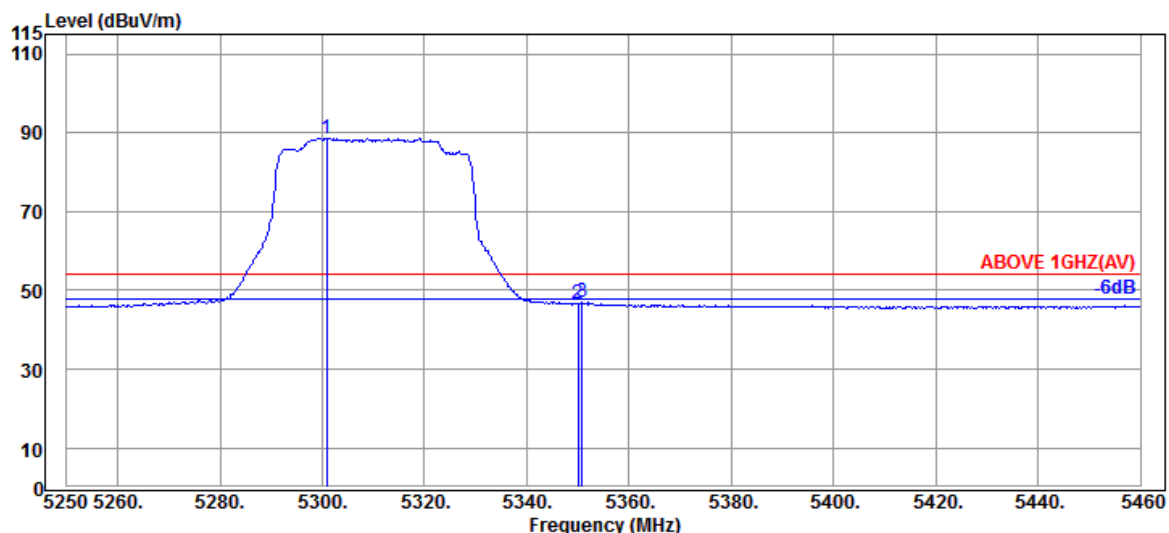

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5300.820               | 34.10                 | 8.97            | 39.28                  | 84.86             | 88.65                   | ---             | ---         | Average  |
| 5349.960                 | 33.90                 | 8.99            | 39.27                  | 42.88             | 46.50                   | 54.00           | 7.50        | Average  |
| 5350.800                 | 33.90                 | 8.99            | 39.27                  | 43.28             | 46.90                   | 54.00           | 7.10        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2C         |
| RU Configuration | 484/65        | Frequency  | TX 5530MHz |

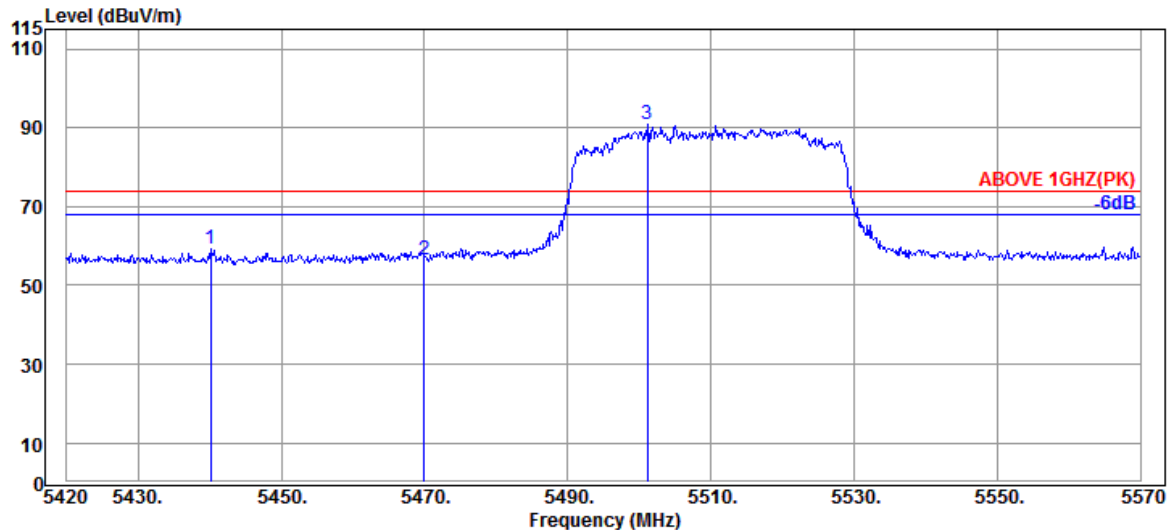

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5440.100                 | 34.17                 | 9.04            | 39.26                  | 55.28             | 59.23                   | 74.00           | 14.77       | Peak     |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 52.66             | 56.63                   | 74.00           | 17.37       | Peak     |
| @ 5501.150               | 34.10                 | 9.08            | 39.26                  | 87.15             | 91.07                   | ---             | ---         | Peak     |

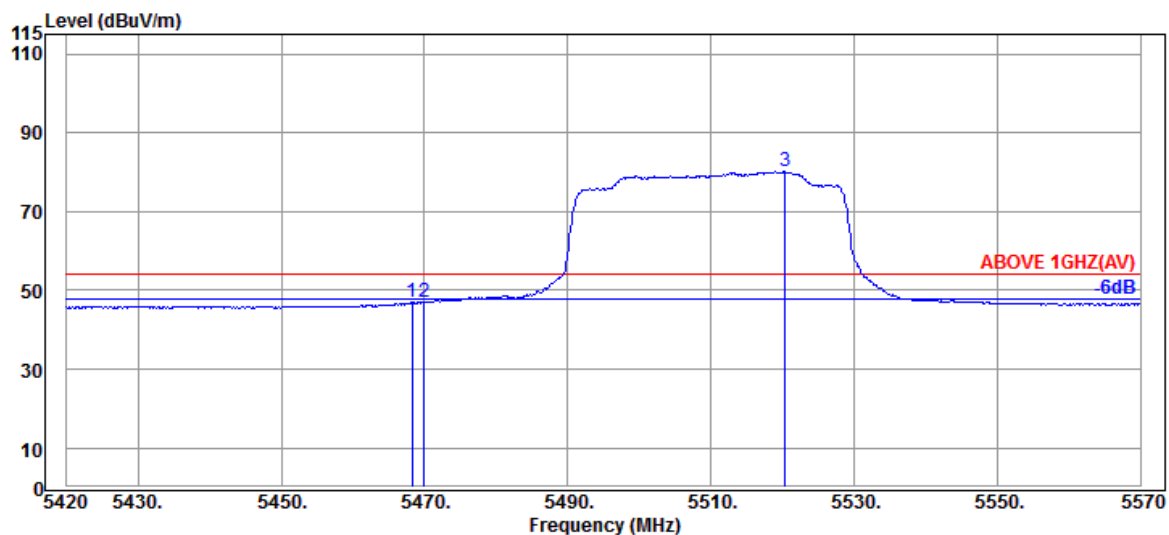

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.300                 | 34.17                 | 9.06            | 39.26                  | 42.98             | 46.95                   | 54.00           | 7.05        | Average  |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 42.90             | 46.87                   | 54.00           | 7.13        | Average  |
| @ 5520.350               | 34.10                 | 9.09            | 39.26                  | 76.21             | 80.14                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2C         |
| RU Configuration | 484/65        | Frequency  | TX 5530MHz |

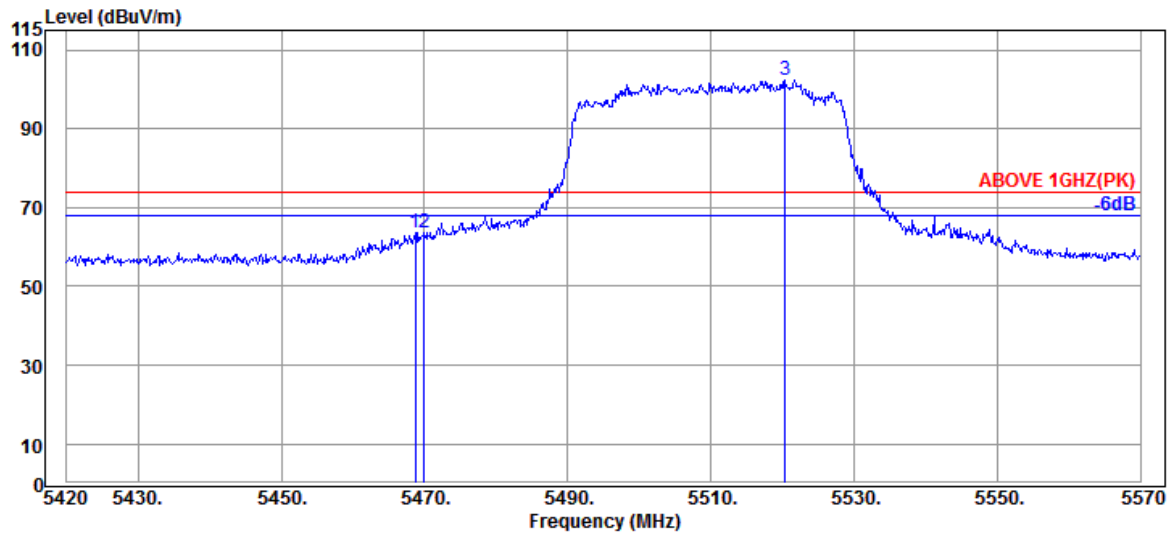

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.750                 | 34.17                 | 9.06            | 39.26                  | 59.58             | 63.55                   | 74.00           | 10.45       | Peak     |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 59.47             | 63.44                   | 74.00           | 10.56       | Peak     |
| @ 5520.350               | 34.10                 | 9.09            | 39.26                  | 98.47             | 102.40                  | ---             | ---         | Peak     |

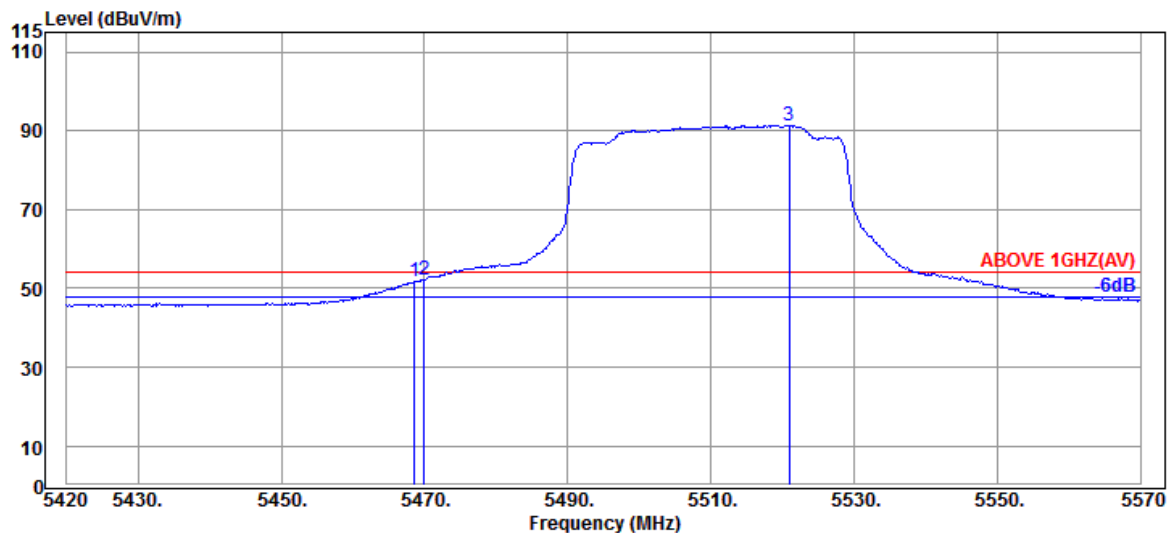

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.600                 | 34.17                 | 9.06            | 39.26                  | 47.77             | 51.74                   | 54.00           | 2.26        | Average  |
| 5469.950                 | 34.17                 | 9.06            | 39.26                  | 48.33             | 52.30                   | 54.00           | 1.70        | Average  |
| @ 5520.950               | 34.10                 | 9.09            | 39.26                  | 87.46             | 91.39                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2C         |
| RU Configuration | 484/66        | Frequency  | TX 5610MHz |

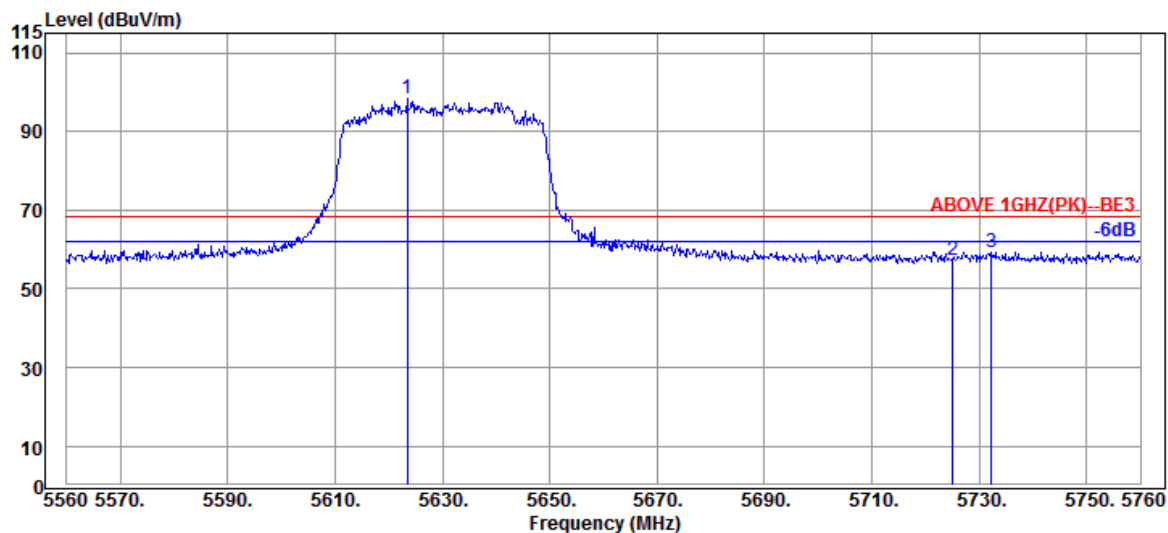

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5623.400               | 34.00                 | 9.14            | 39.29            | 94.41             | 98.26                   | ---             | ---         | Peak     |
| 5725.000                 | 33.80                 | 9.20            | 39.30            | 53.50             | 57.20                   | 68.20           | 11.00       | Peak     |
| 5732.200                 | 33.80                 | 9.20            | 39.31            | 55.70             | 59.39                   | 68.20           | 8.81        | Peak     |

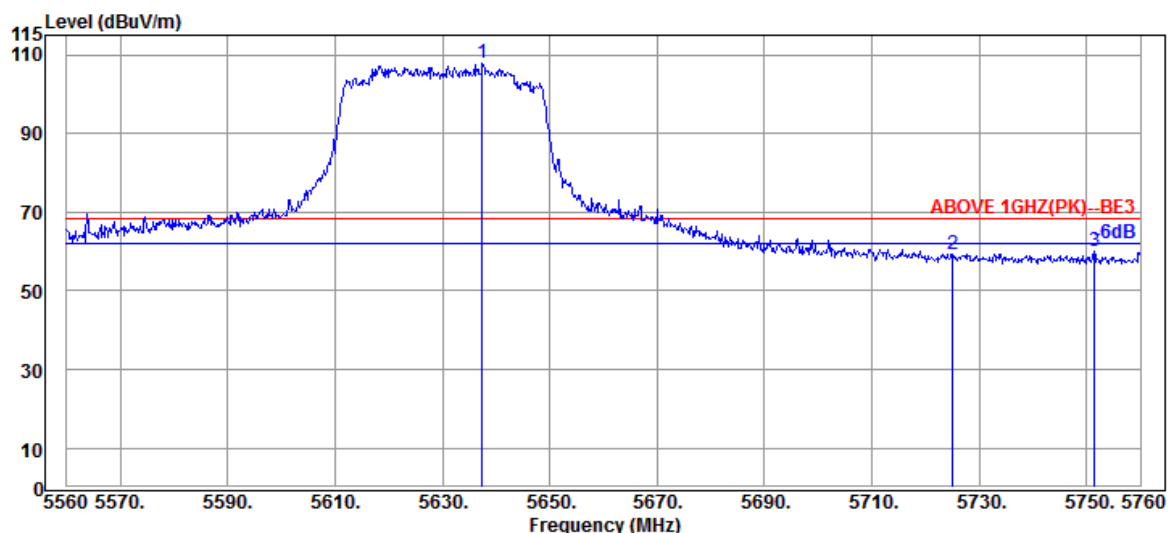

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5637.400               | 34.00                 | 9.14            | 39.29            | 103.86            | 107.71                  | ---             | ---         | Peak     |
| 5725.000                 | 33.80                 | 9.20            | 39.30            | 55.73             | 59.43                   | 68.20           | 8.77        | Peak     |
| 5751.400                 | 33.80                 | 9.20            | 39.31            | 56.38             | 60.07                   | 68.20           | 8.13        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2207001

Report Number: EM-F220532


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 3          |
| RU Configuration | 484/65        | Frequency  | TX 5775MHz |

#### Antenna at Horizontal Polarization

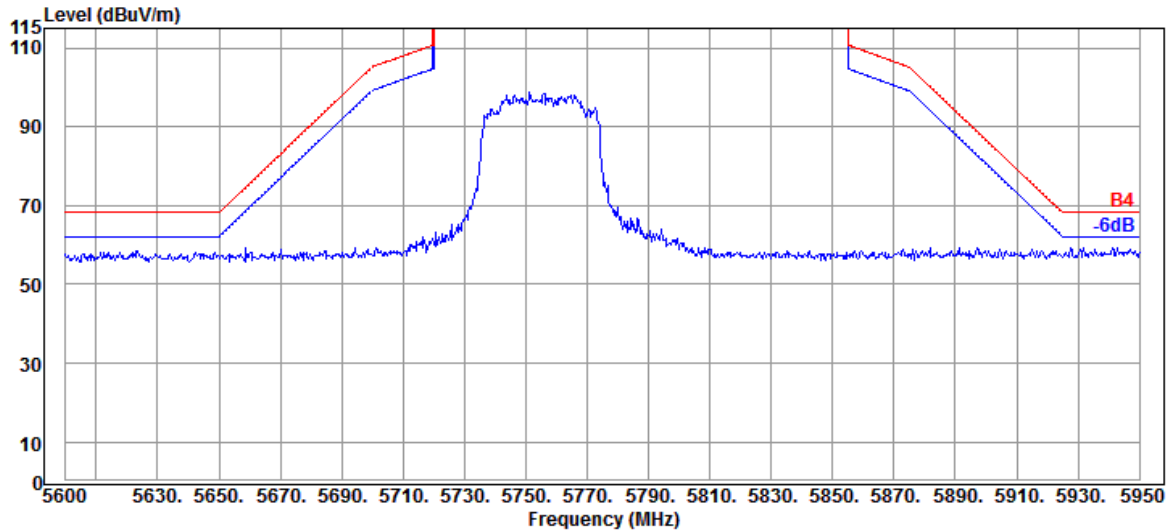

#### Antenna at Vertical Polarization

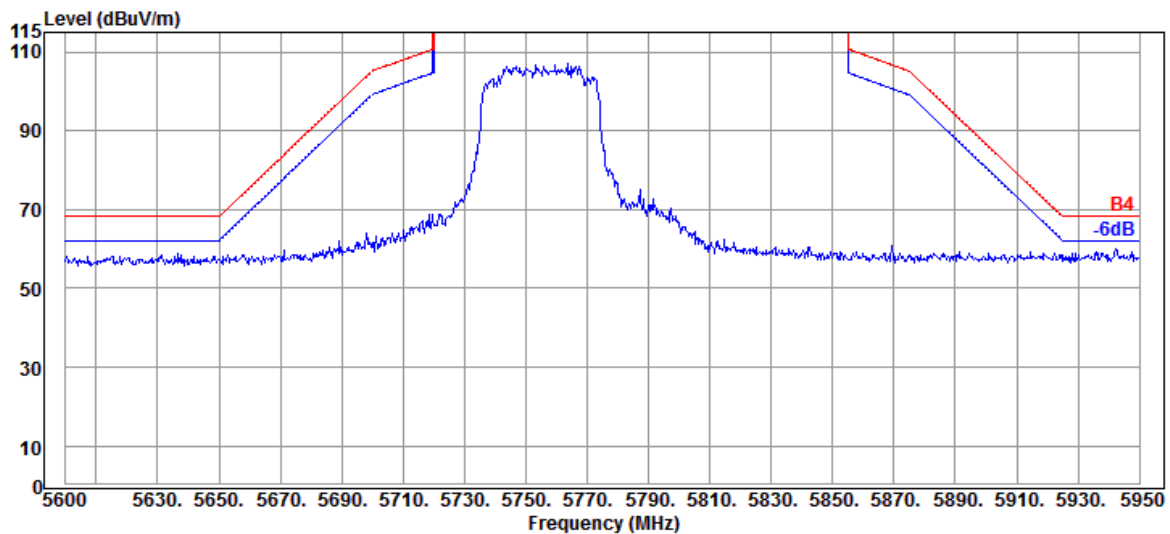


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 3          |
| RU Configuration | 484/66        | Frequency  | TX 5775MHz |

### Antenna at Horizontal Polarization

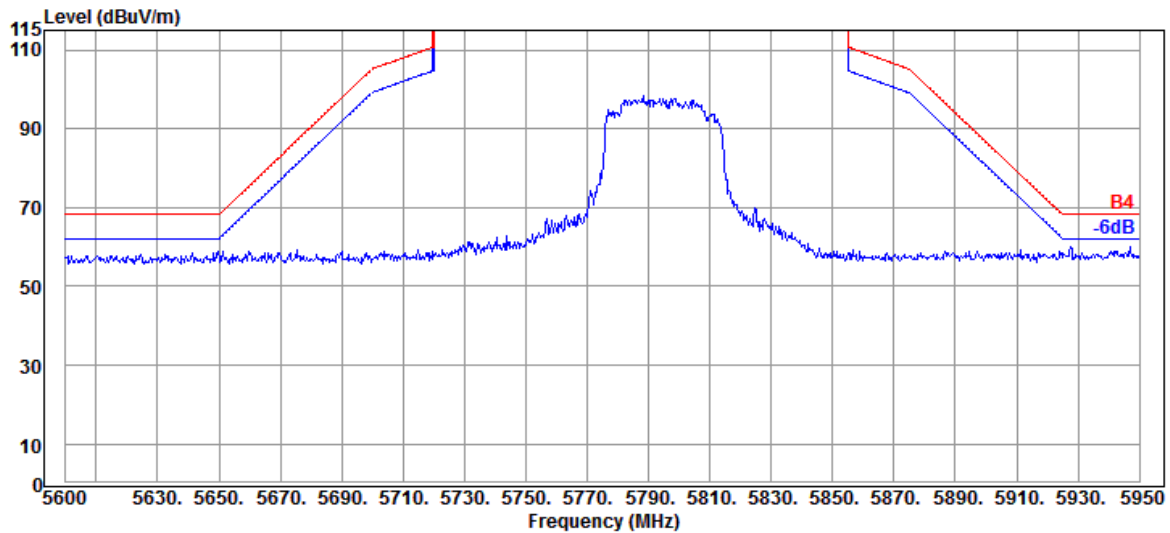


### Antenna at Vertical Polarization

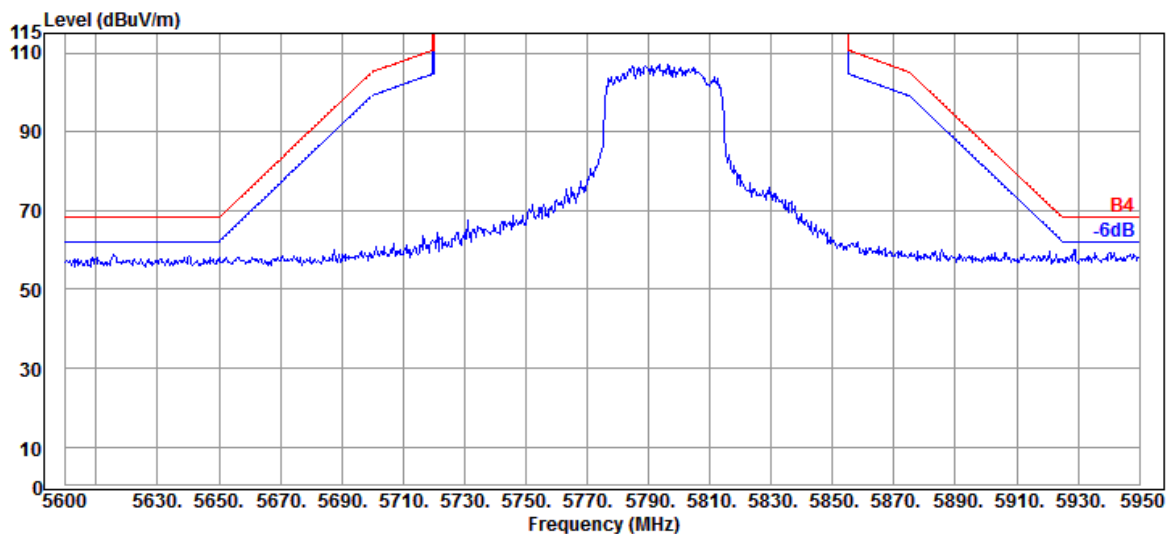

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 1 & 2A     |
| RU Configuration | 996/67         | Frequency  | TX 5250MHz |

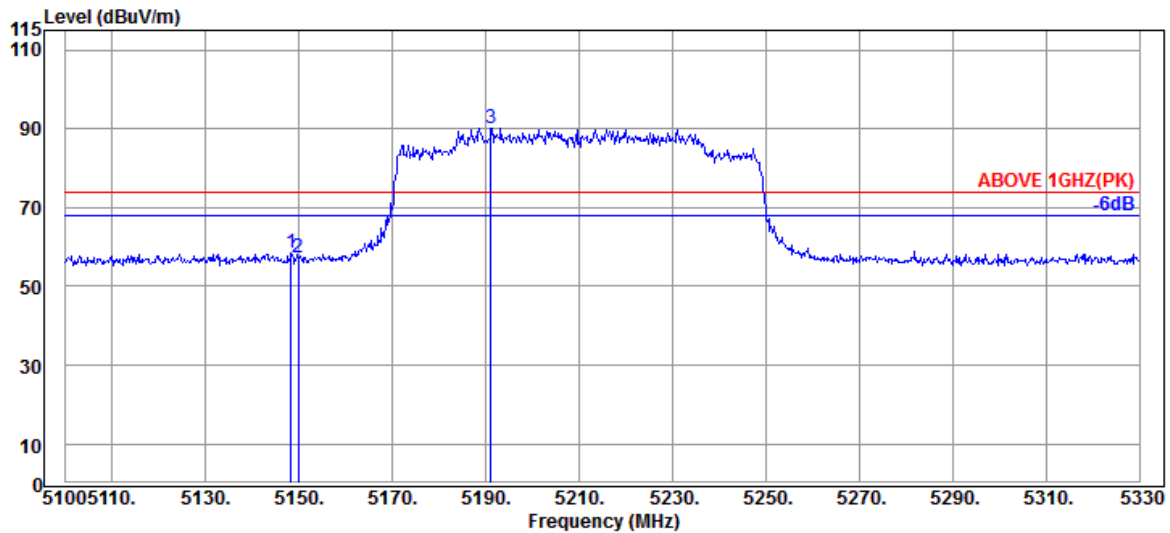

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.300                 | 33.70                 | 8.88            | 39.29                  | 55.07             | 58.36                   | 74.00           | 15.64       | Peak     |
| 5149.910                 | 33.70                 | 8.88            | 39.29                  | 53.84             | 57.13                   | 74.00           | 16.87       | Peak     |
| @ 5191.080               | 33.70                 | 8.91            | 39.28                  | 86.93             | 90.26                   | ---             | ---         | Peak     |

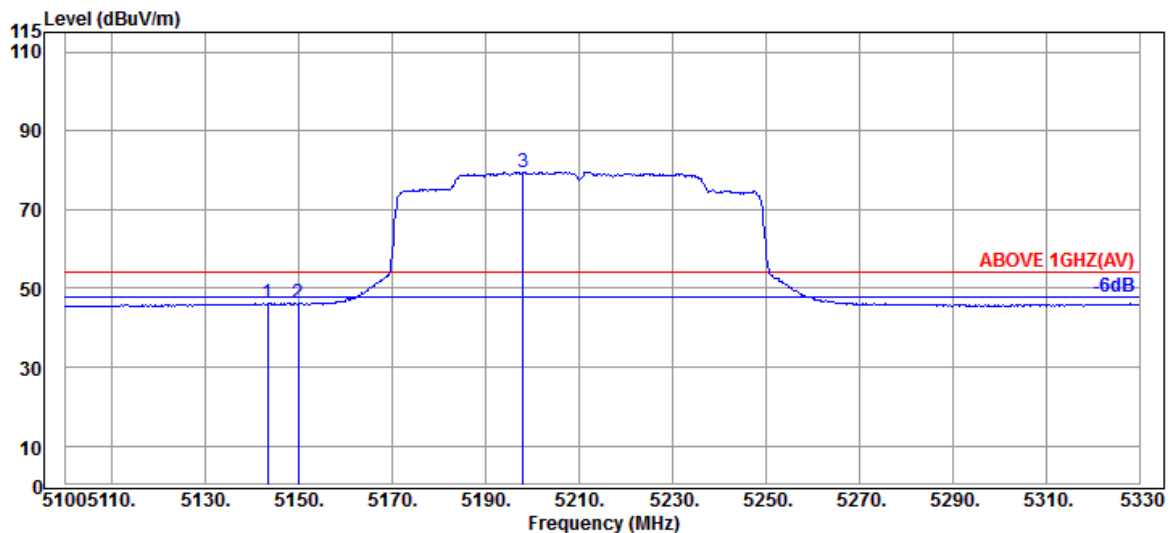

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5143.240                 | 33.70                 | 8.88            | 39.29                  | 42.90             | 46.19                   | 54.00           | 7.81        | Average  |
| 5149.910                 | 33.70                 | 8.88            | 39.29                  | 42.95             | 46.24                   | 54.00           | 7.76        | Average  |
| @ 5197.980               | 33.70                 | 8.91            | 39.28                  | 76.20             | 79.53                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 1 & 2A     |
| RU Configuration | 996/67         | Frequency  | TX 5250MHz |

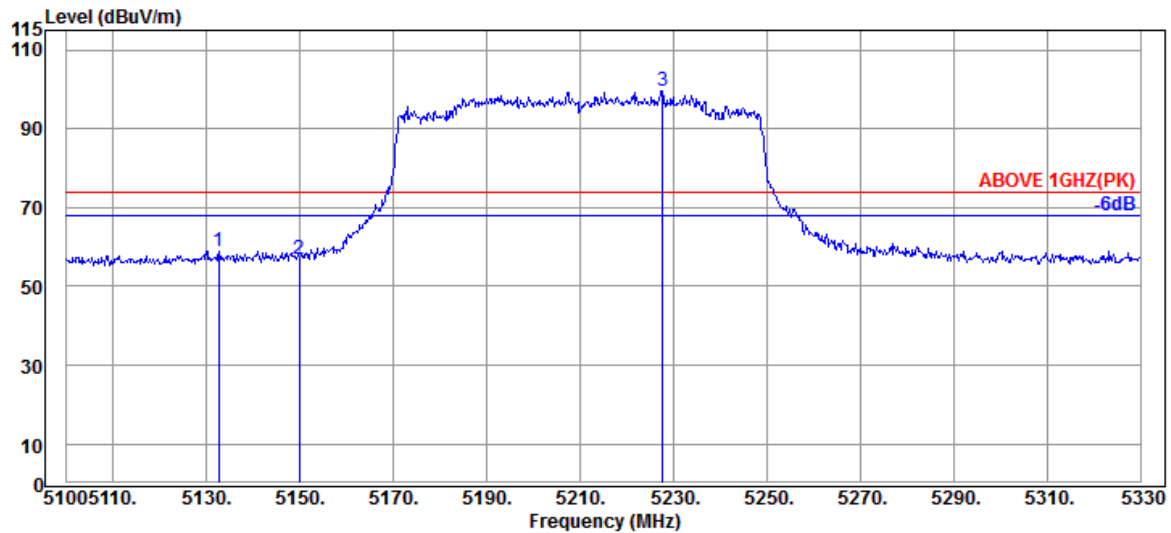

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5132.660                 | 33.70                 | 8.88            | 39.29                  | 55.75             | 59.04                   | 74.00           | 14.96       | Peak     |
| 5149.910                 | 33.70                 | 8.88            | 39.29                  | 53.58             | 56.87                   | 74.00           | 17.13       | Peak     |
| @ 5227.650               | 33.75                 | 8.93            | 39.28                  | 96.14             | 99.54                   | ---             | ---         | Peak     |

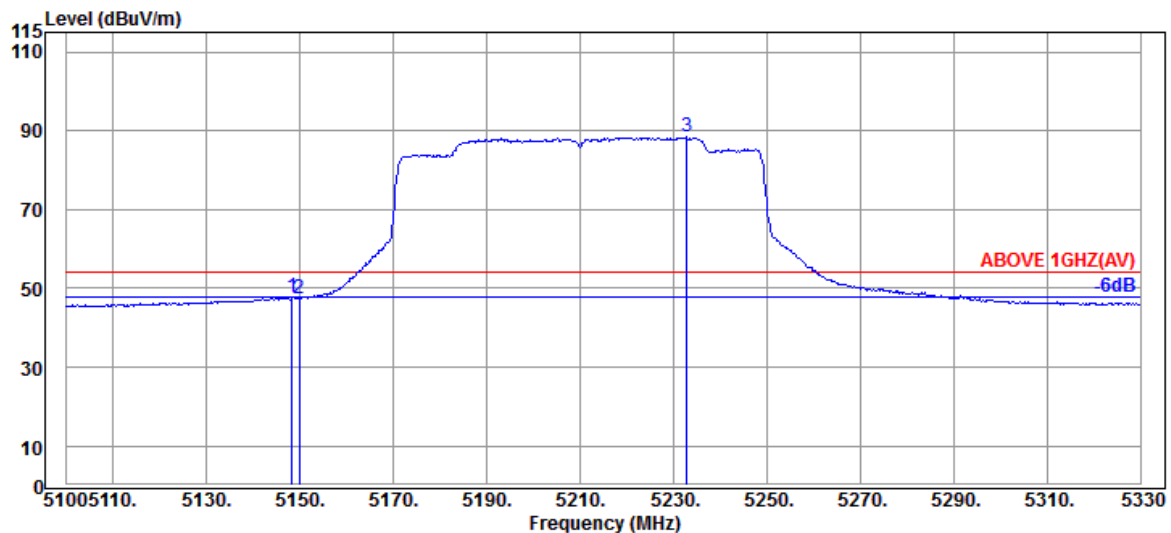

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.300                 | 33.70                 | 8.88            | 39.29                  | 44.41             | 47.70                   | 54.00           | 6.30        | Average  |
| 5149.910                 | 33.70                 | 8.88            | 39.29                  | 44.07             | 47.36                   | 54.00           | 6.64        | Average  |
| @ 5232.940               | 33.78                 | 8.93            | 39.28                  | 85.19             | 88.62                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 1 & 2A     |
| RU Configuration | 996/S67        | Frequency  | TX 5250MHz |

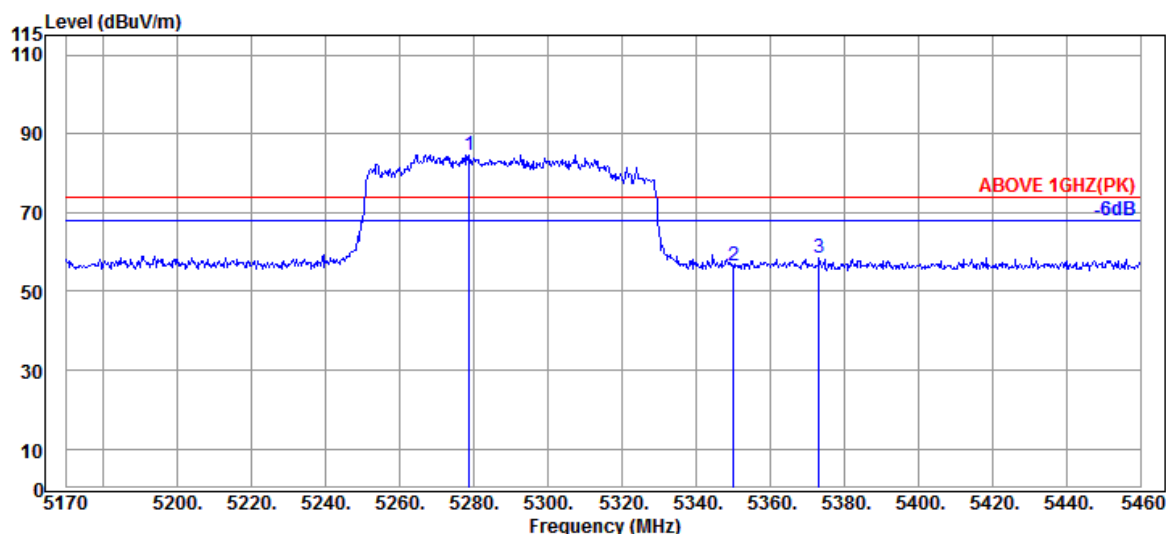

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5278.750               | 34.00                 | 8.96            | 39.28            | 81.03             | 84.71                   | ---             | ---         | Peak     |
| 5350.090                 | 33.90                 | 8.99            | 39.27            | 52.70             | 56.32                   | 74.00           | 17.68       | Peak     |
| 5373.290                 | 34.03                 | 9.01            | 39.27            | 54.76             | 58.53                   | 74.00           | 15.47       | Peak     |

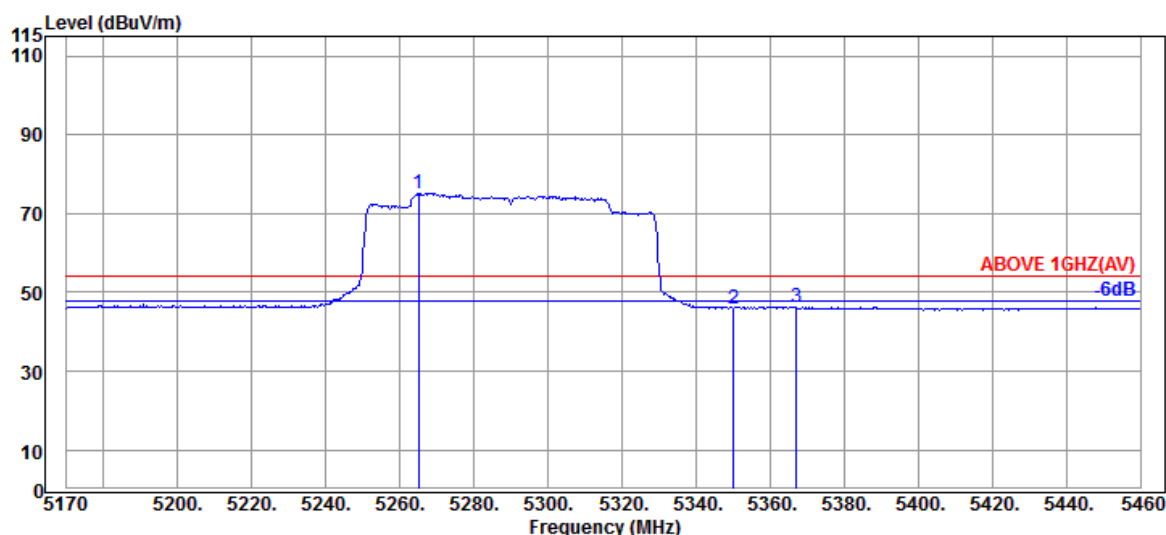

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5265.120               | 33.90                 | 8.95            | 39.28            | 71.71             | 75.28                   | ---             | ---         | Average  |
| 5350.090                 | 33.90                 | 8.99            | 39.27            | 42.41             | 46.03                   | 54.00           | 7.97        | Average  |
| 5367.200                 | 33.97                 | 9.00            | 39.27            | 42.55             | 46.25                   | 54.00           | 7.75        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 1 & 2A     |
| RU Configuration | 996/S67        | Frequency  | TX 5250MHz |

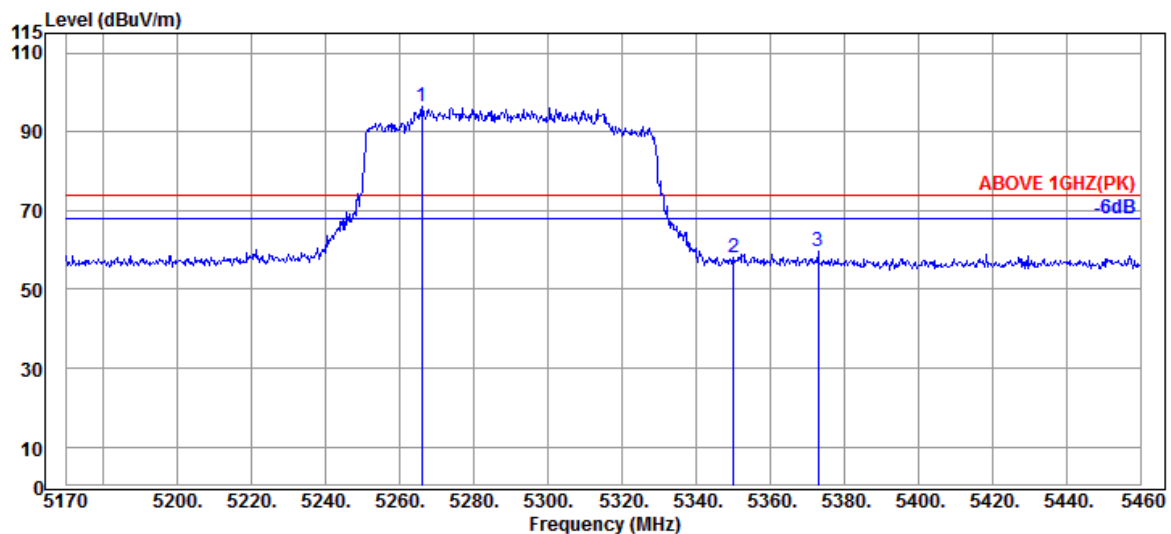

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5265.990               | 33.90                 | 8.95            | 39.28                  | 92.97             | 96.54                   | ---             | ---         | Peak     |
| 5350.090                 | 33.90                 | 8.99            | 39.27                  | 54.35             | 57.97                   | 74.00           | 16.03       | Peak     |
| 5373.000                 | 34.03                 | 9.01            | 39.27                  | 55.92             | 59.69                   | 74.00           | 14.31       | Peak     |

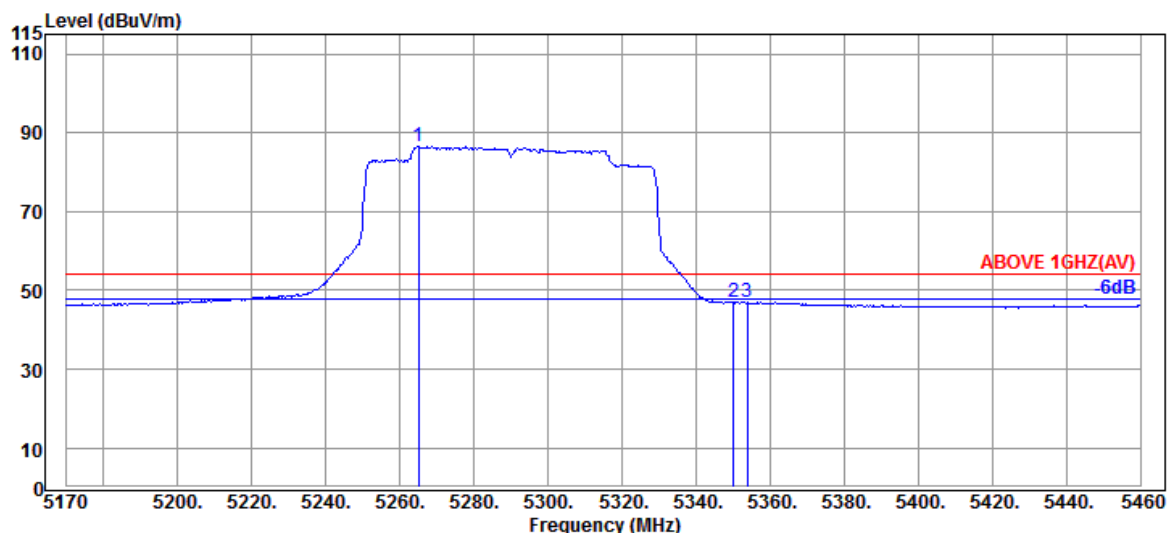

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5265.120               | 33.90                 | 8.95            | 39.28                  | 83.11             | 86.68                   | ---             | ---         | Average  |
| 5350.090                 | 33.90                 | 8.99            | 39.27                  | 43.28             | 46.90                   | 54.00           | 7.10        | Average  |
| 5353.860                 | 33.90                 | 8.99            | 39.27                  | 43.45             | 47.07                   | 54.00           | 6.93        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 2C         |
| RU Configuration | 996/67         | Frequency  | TX 5570MHz |

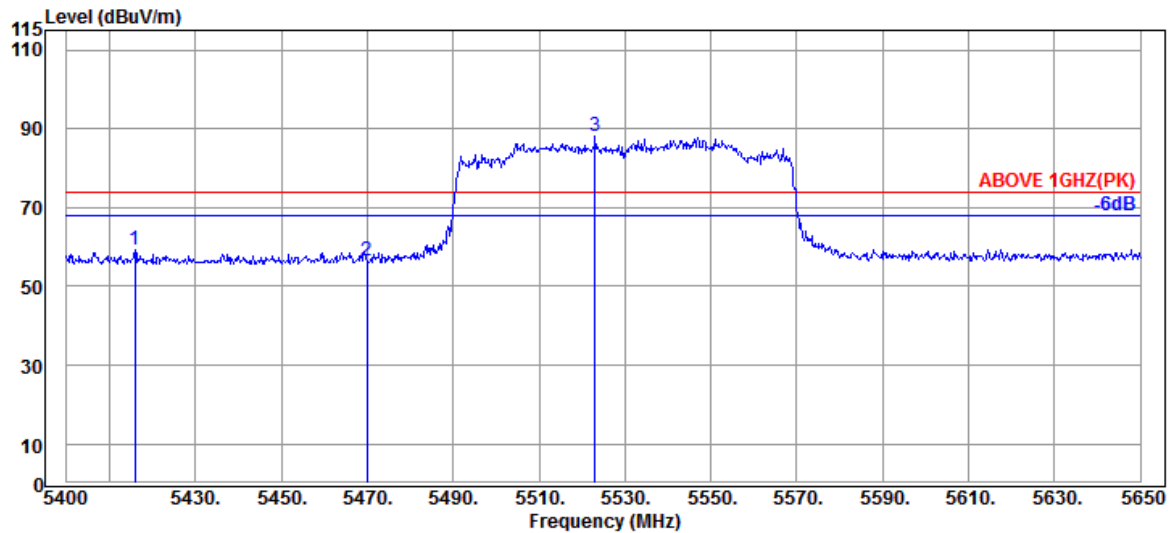

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5416.000                 | 34.12                 | 9.03            | 39.27                  | 55.23             | 59.11                   | 74.00           | 14.89       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 52.64             | 56.61                   | 74.00           | 17.39       | Peak     |
| @ 5523.000               | 34.10                 | 9.09            | 39.26                  | 84.12             | 88.05                   | ---             | ---         | Peak     |

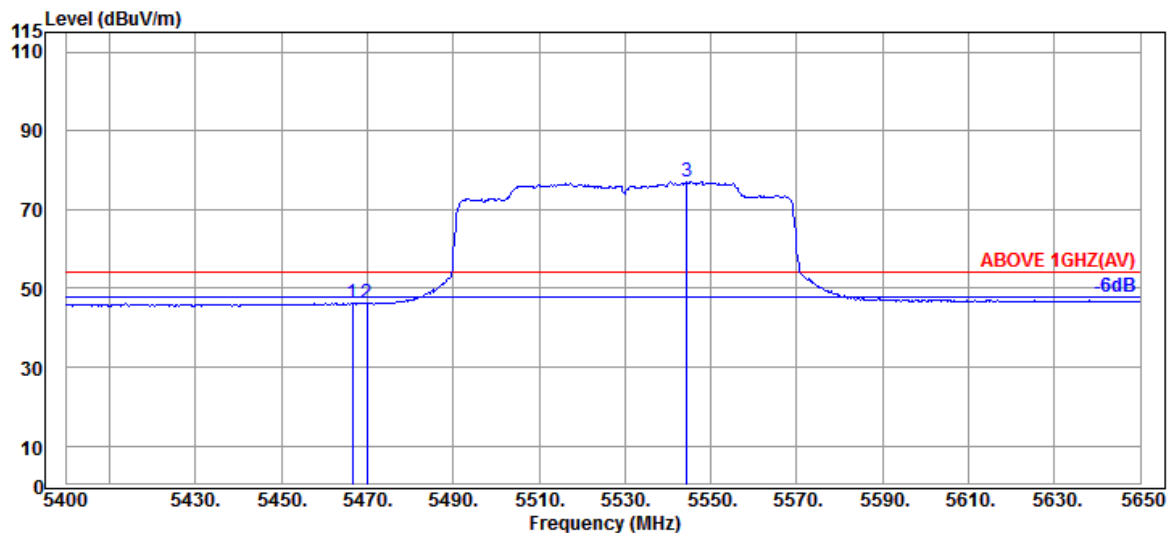


## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.500                 | 34.17                 | 9.06            | 39.26                  | 42.29             | 46.26                   | 54.00           | 7.74        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26                  | 42.19             | 46.16                   | 54.00           | 7.84        | Average  |
| @ 5544.500               | 34.10                 | 9.10            | 39.27                  | 73.07             | 77.00                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 2C         |
| RU Configuration | 996/67         | Frequency  | TX 5570MHz |

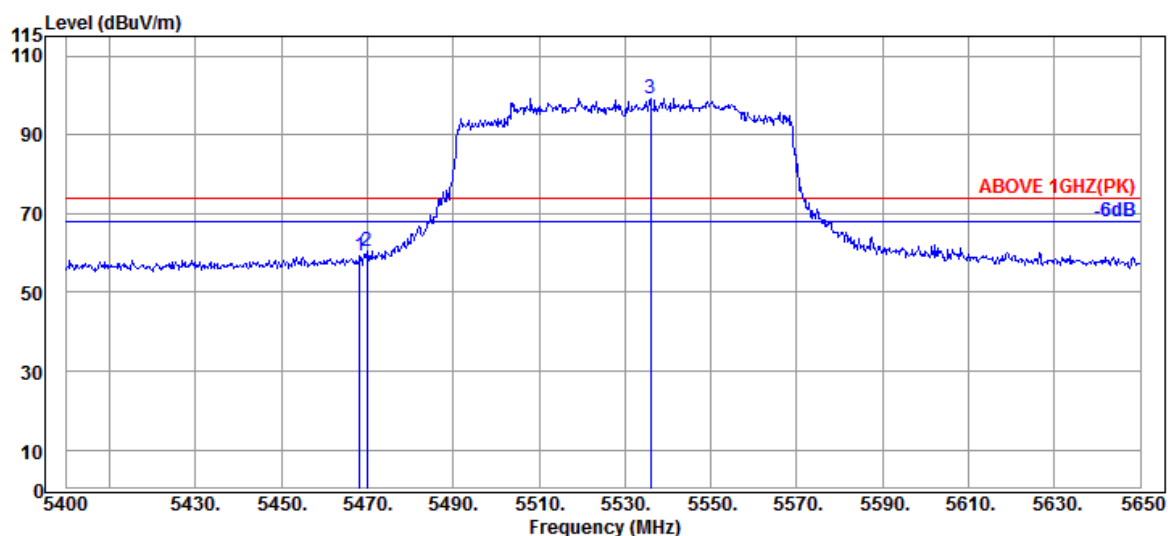

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.250                 | 34.17                 | 9.06            | 39.26            | 55.37             | 59.34                   | 74.00           | 14.66       | Peak     |
| 5470.000                 | 34.17                 | 9.06            | 39.26            | 56.47             | 60.44                   | 74.00           | 13.56       | Peak     |
| @ 5536.000               | 34.10                 | 9.09            | 39.27            | 95.37             | 99.29                   | ---             | ---         | Peak     |

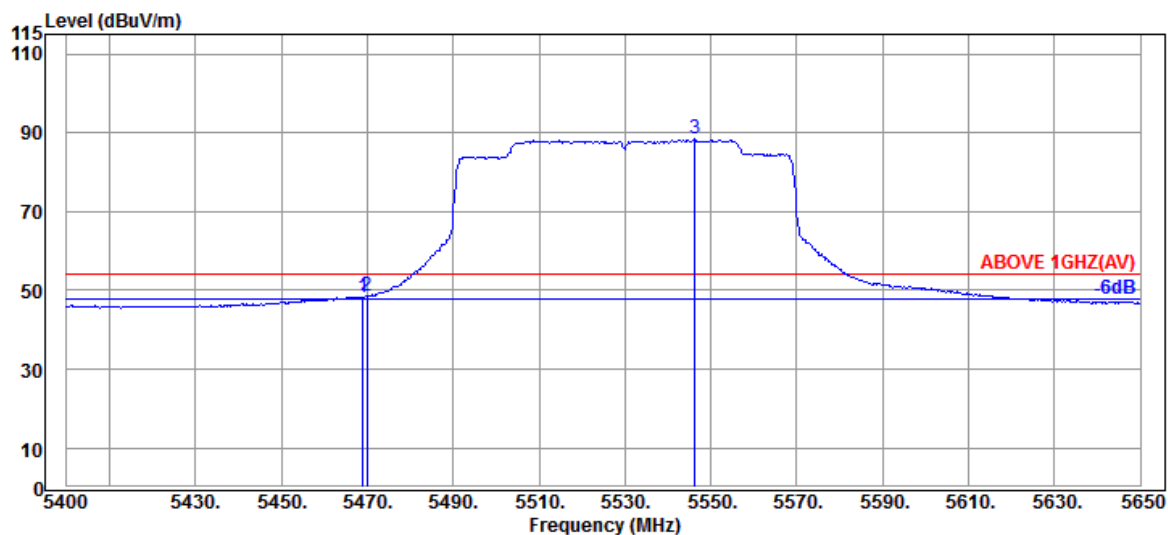

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.000                 | 34.17                 | 9.06            | 39.26            | 44.37             | 48.34                   | 54.00           | 5.66        | Average  |
| 5470.000                 | 34.17                 | 9.06            | 39.26            | 44.76             | 48.73                   | 54.00           | 5.27        | Average  |
| @ 5546.250               | 34.10                 | 9.10            | 39.27            | 84.40             | 88.33                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 2C         |
| RU Configuration | 996/S67        | Frequency  | TX 5570MHz |

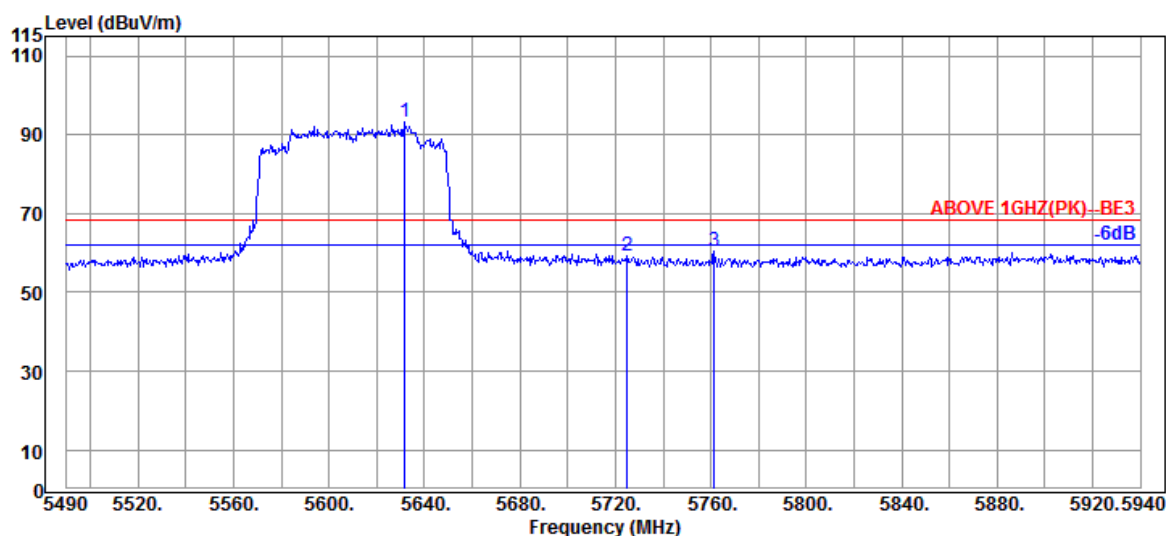

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5631.750                 | 34.00                 | 9.14            | 39.29            | 89.22             | 93.07                   | ---             | ---         | Peak     |
|   | 5724.900                 | 33.80                 | 9.20            | 39.30            | 55.63             | 59.33                   | 68.20           | 8.87        | Peak     |
|   | 5761.350                 | 33.87                 | 9.21            | 39.31            | 56.52             | 60.29                   | 68.20           | 7.91        | Peak     |

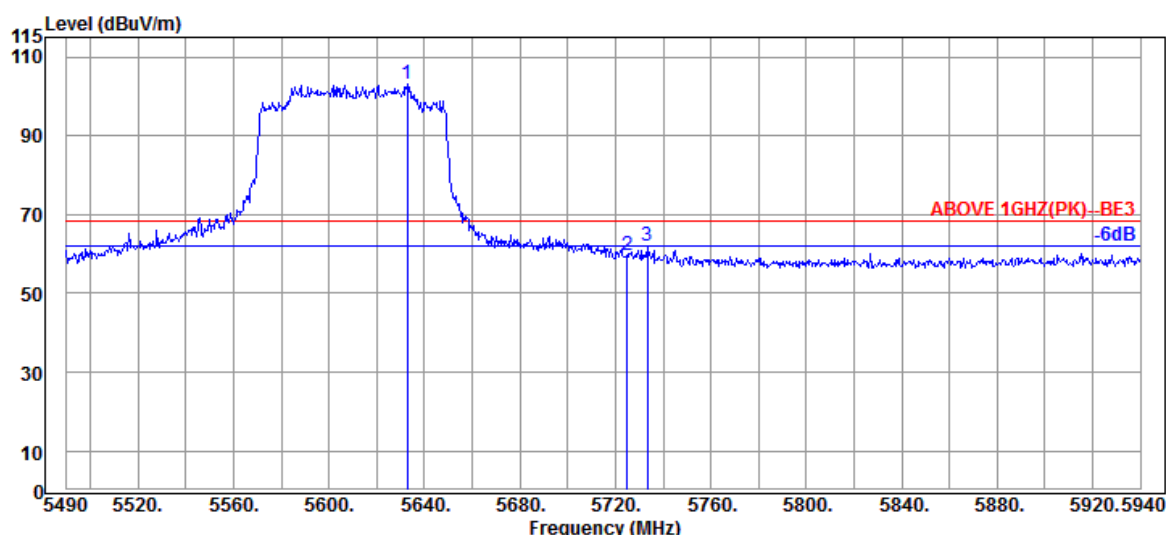

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5632.650                 | 34.00                 | 9.14            | 39.29            | 99.12             | 102.97                  | ---             | ---         | Peak     |
|   | 5724.900                 | 33.80                 | 9.20            | 39.30            | 55.81             | 59.51                   | 68.20           | 8.69        | Peak     |
|   | 5733.450                 | 33.80                 | 9.20            | 39.31            | 58.50             | 62.19                   | 68.20           | 6.01        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**A.2.2 Emissions outside the frequency band**

The emissions (up to 40GHz) not reported for there is no emission be found.

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 1          |
|      |         | Frequency  | TX 5200MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10400.000                | 38.10                 | 12.64           | 39.44                  | 35.71             | 47.01                   | 54.00           | 6.99        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10400.000                | 38.10                 | 12.64           | 39.44                  | 36.45             | 47.75                   | 54.00           | 6.25        | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2A         |
|      |         | Frequency  | TX 5300MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10600.000                | 38.40                 | 12.79           | 39.28                  | 36.03             | 47.94                   | 54.00           | 6.06        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10600.000                | 38.40                 | 12.79           | 39.28                  | 35.61             | 47.52                   | 54.00           | 6.48        | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5580MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.77                 | 13.27           | 39.06                  | 34.33             | 47.31                   | 54.00           | 6.69        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.77                 | 13.27           | 39.06                  | 34.41             | 47.39                   | 54.00           | 6.61        | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5720MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.97                 | 13.55           | 39.13                  | 35.13             | 48.52                   | 54.00           | 5.48        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.97                 | 13.55           | 39.13                  | 36.46             | 49.85                   | 54.00           | 4.15        | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 3          |
|      |         | Frequency  | TX 5785MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 39.17                 | 13.69           | 39.18                  | 35.75             | 49.43                   | 54.00           | 4.57        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 39.17                 | 13.69           | 39.18                  | 36.00             | 49.68                   | 54.00           | 4.32        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 1          |
|      |              | Frequency  | TX 5240MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 38.25                 | 12.70           | 39.36            | 37.03             | 48.62                   | 54.00           | 5.38        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 38.25                 | 12.70           | 39.36            | 36.95             | 48.54                   | 54.00           | 5.46        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5260MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000                | 38.30                 | 12.73           | 39.32            | 35.40             | 47.11                   | 54.00           | 6.89        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000                | 38.30                 | 12.73           | 39.32            | 36.98             | 48.69                   | 54.00           | 5.31        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5580MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.77                 | 13.27           | 39.06            | 34.27             | 47.25                   | 54.00           | 6.75        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.77                 | 13.27           | 39.06            | 34.05             | 47.03                   | 54.00           | 6.97        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5720MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.97                 | 13.55           | 39.13                  | 36.14             | 49.53                   | 54.00           | 4.47        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.97                 | 13.55           | 39.13                  | 34.91             | 48.30                   | 54.00           | 5.70        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 3          |
|      |              | Frequency  | TX 5785MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 39.17                 | 13.69           | 39.18                  | 35.07             | 48.75                   | 54.00           | 5.25        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 39.17                 | 13.69           | 39.18                  | 35.89             | 49.57                   | 54.00           | 4.43        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 1          |
|      |              | Frequency  | TX 5230MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000                | 38.20                 | 12.68           | 39.40                  | 35.36             | 46.84                   | 54.00           | 7.16        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000                | 38.20                 | 12.68           | 39.40                  | 36.75             | 48.23                   | 54.00           | 5.77        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5270MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000                | 38.33                 | 12.75           | 39.30                  | 34.97             | 46.75                   | 54.00           | 7.25        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000                | 38.33                 | 12.75           | 39.30                  | 36.19             | 47.97                   | 54.00           | 6.03        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5550MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000                | 38.70                 | 13.19           | 39.05                  | 34.61             | 47.45                   | 54.00           | 6.55        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000                | 38.70                 | 13.19           | 39.05                  | 35.31             | 48.15                   | 54.00           | 5.85        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5710MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.97                 | 13.55           | 39.12                  | 35.31             | 48.71                   | 54.00           | 5.29        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.97                 | 13.55           | 39.12                  | 35.43             | 48.83                   | 54.00           | 5.17        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3          |
|      |              | Frequency  | TX 5795MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000                | 39.20                 | 13.72           | 39.20                  | 35.89             | 49.61                   | 54.00           | 4.39        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000                | 39.20                 | 13.72           | 39.20                  | 35.90             | 49.62                   | 54.00           | 4.38        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 1          |
|      |                | Frequency  | TX 5210MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 38.15                 | 12.66           | 39.44                  | 36.62             | 47.99                   | 54.00           | 6.01        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 38.15                 | 12.66           | 39.44                  | 36.24             | 47.61                   | 54.00           | 6.39        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A         |
|      |                | Frequency  | TX 5290MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 38.37                 | 12.77           | 39.28                  | 36.30             | 48.16                   | 54.00           | 5.84        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 38.37                 | 12.77           | 39.28                  | 34.88             | 46.74                   | 54.00           | 7.26        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5610MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.80                 | 13.30           | 39.08                  | 34.87             | 47.89                   | 54.00           | 6.11        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.80                 | 13.30           | 39.08                  | 34.10             | 47.12                   | 54.00           | 6.88        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5690MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.83                 | 13.48           | 39.11                  | 36.19             | 49.39                   | 54.00           | 4.61        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.83                 | 13.48           | 39.11                  | 35.19             | 48.39                   | 54.00           | 5.61        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 3          |
|      |                | Frequency  | TX 5775MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 39.13                 | 13.65           | 39.18                  | 35.33             | 48.93                   | 54.00           | 5.07        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 39.13                 | 13.65           | 39.18                  | 35.54             | 49.14                   | 54.00           | 4.86        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 1/2A       |
|      |                 | Frequency  | TX 5250MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 38.30                 | 12.73           | 39.32                  | 35.58             | 47.29                   | 54.00           | 6.71        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 38.30                 | 12.73           | 39.32                  | 35.37             | 47.08                   | 54.00           | 6.92        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C         |
|      |                 | Frequency  | TX 5570MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.73                 | 13.23           | 39.06                  | 35.32             | 48.22                   | 54.00           | 5.78        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.73                 | 13.23           | 39.06                  | 35.02             | 47.92                   | 54.00           | 6.08        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1          |
|      |               | Frequency  | TX 5240MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 38.25                 | 12.70           | 39.36                  | 35.73             | 47.32                   | 54.00           | 6.68        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 38.25                 | 12.70           | 39.36                  | 35.76             | 47.35                   | 54.00           | 6.65        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5300MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10600.000                | 38.40                 | 12.79           | 39.28                  | 35.74             | 47.65                   | 54.00           | 6.35        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10600.000                | 38.40                 | 12.79           | 39.28                  | 35.13             | 47.04                   | 54.00           | 6.96        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5500MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11000.000                | 38.70                 | 13.09           | 39.03                  | 35.04             | 47.80                   | 54.00           | 6.20        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11000.000                | 38.70                 | 13.09           | 39.03                  | 35.74             | 48.50                   | 54.00           | 5.50        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5720MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.97                 | 13.55           | 39.13                  | 35.26             | 48.65                   | 54.00           | 5.35        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.97                 | 13.55           | 39.13                  | 35.80             | 49.19                   | 54.00           | 4.81        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3          |
|      |               | Frequency  | TX 5825MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000                | 39.27                 | 13.76           | 39.21                  | 35.76             | 49.58                   | 54.00           | 4.42        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000                | 39.27                 | 13.76           | 39.21                  | 34.67             | 48.49                   | 54.00           | 5.51        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1          |
|      |               | Frequency  | TX 5230MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10460.000                      | 38.20                       | 12.68                 | 39.40                  | 36.69                   | 48.17                         | 54.00              | 5.83           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10460.000                      | 38.20                       | 12.68                 | 39.40                  | 37.21                   | 48.69                         | 54.00              | 5.31           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5270MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10540.000                      | 38.33                       | 12.75                 | 39.30                  | 36.47                   | 48.25                         | 54.00              | 5.75           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10540.000                      | 38.33                       | 12.75                 | 39.30                  | 35.63                   | 47.41                         | 54.00              | 6.59           | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5550MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000                | 38.70                 | 13.19           | 39.05                  | 34.84             | 47.68                   | 54.00           | 6.32        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000                | 38.70                 | 13.19           | 39.05                  | 35.32             | 48.16                   | 54.00           | 5.84        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5710MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.97                 | 13.55           | 39.12                  | 34.10             | 47.50                   | 54.00           | 6.50        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.97                 | 13.55           | 39.12                  | 33.99             | 47.39                   | 54.00           | 6.61        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3          |
|      |               | Frequency  | TX 5755MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000                | 39.10                 | 13.61           | 39.16                  | 35.12             | 48.67                   | 54.00           | 5.33        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000                | 39.10                 | 13.61           | 39.16                  | 35.44             | 48.99                   | 54.00           | 5.01        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1          |
|      |               | Frequency  | TX 5210MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 38.15                 | 12.66           | 39.44                  | 35.91             | 47.28                   | 54.00           | 6.72        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 38.15                 | 12.66           | 39.44                  | 35.89             | 47.26                   | 54.00           | 6.74        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5290MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 38.37                 | 12.77           | 39.28                  | 34.79             | 46.65                   | 54.00           | 7.35        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 38.37                 | 12.77           | 39.28                  | 36.59             | 48.45                   | 54.00           | 5.55        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5610MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.80                 | 13.30           | 39.08                  | 34.80             | 47.82                   | 54.00           | 6.18        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.80                 | 13.30           | 39.08                  | 34.79             | 47.81                   | 54.00           | 6.19        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5690MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.83                 | 13.48           | 39.11                  | 35.03             | 48.23                   | 54.00           | 5.77        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.83                 | 13.48           | 39.11                  | 35.17             | 48.37                   | 54.00           | 5.63        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3          |
|      |               | Frequency  | TX 5775MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 39.13                 | 13.65           | 39.18                  | 36.48             | 50.08                   | 54.00           | 3.92        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 39.13                 | 13.65           | 39.18                  | 34.96             | 48.56                   | 54.00           | 5.44        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1/2A       |
|      |                | Frequency  | TX 5250MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 38.30                 | 12.73           | 39.32                  | 36.58             | 48.29                   | 54.00           | 5.71        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 38.30                 | 12.73           | 39.32                  | 36.13             | 47.84                   | 54.00           | 6.16        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.73                 | 13.23           | 39.06                  | 34.75             | 47.65                   | 54.00           | 6.35        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.73                 | 13.23           | 39.06                  | 34.75             | 47.65                   | 54.00           | 6.35        | Peak     |

**A.2.3 Emissions in Non-restricted Frequency Bands**

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.