

A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED

BANDWIDTH

Test Date	2022/07/11 ~ 21	Temp./Hum.	24 ~ 25°C/41 ~ 52%
Cable Loss	1.0dB	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Average Output Power and Emission/Occupied Bandwidth

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	22.37	21.80	16.617	16.616	17.84	18.52	0.110	18.63	24	N/A
	5200	22.29	21.92	16.534	16.626	18.04	18.56		18.67		
	5240	21.47	23.13	16.563	16.569	18.15	18.52		18.63		
U-NII Band 2A	5260	23.21	22.35	16.575	16.538	18.36	18.67		18.78		24.49
	5300	22.48	22.41	16.563	16.588	18.68	18.77		18.88		24.50
	5320	22.98	22.58	16.518	16.583	18.41	18.66		18.77		24.54
U-NII Band 2C	5500	22.22	22.54	16.587	16.580	18.25	18.76		18.87		24.47
	5580	22.89	21.01	16.507	16.511	18.71	18.81		18.92		24.22
	5700	23.15	22.87	16.602	16.637	18.04	18.66		18.77		24.59
	5720	22.53	22.76	16.529	16.641	17.77	18.28		18.39		24.53
Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				18.65		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB)		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	16.30	16.35	16.583	16.615	17.87	18.65	0.110	18.76	30	N/A
	5785	16.35	13.35	16.592	16.607	18.24	18.78		18.89		
	5825	16.36	15.09	16.561	16.562	18.63	18.70		18.81		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	23.54	22.44	17.740	17.714	16.31	16.79	N/A	19.57	24	N/A
	5200	22.65	22.10	17.713	17.741	17.47	17.60		20.55		
	5240	22.36	23.29	17.750	17.728	17.86	17.52		20.70		
U-NII Band 2A	5260	23.63	23.52	17.727	17.711	17.56	18.10		20.85		24.71
	5300	22.95	24.03	17.759	17.726	17.46	17.91		20.70		24.61
	5320	22.82	22.42	17.739	17.721	17.00	17.31		20.17		24.51
U-NII Band 2C	5500	23.62	22.06	17.694	17.706	17.43	17.94		20.70		24.44
	5580	22.46	22.63	17.711	17.714	17.63	18.40		21.04		24.51
	5700	21.26	22.49	17.693	17.729	16.87	17.38		20.14		24.28
	5720	24.53	23.26	17.703	17.671	17.86	18.25		21.07		24.67
Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	13.60	15.08	17.712	17.685	18.23	18.39	N/A	21.32	30	N/A
	5785	14.83	13.19	17.696	17.693	18.31	18.66		21.50		
	5825	14.70	12.30	17.679	17.680	18.52	17.99		21.27		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	41.89	40.94	36.011	36.054	15.41	15.83	0.123	18.76	24	N/A
	5230	42.60	41.48	36.058	36.037	18.25	18.63		21.58		
U-NII Band 2A	5270	42.67	44.01	36.063	36.139	18.68	18.62		21.78		27.30
	5310	41.40	41.32	35.960	36.068	15.34	15.33		18.47		27.16
U-NII Band 2C	5510	42.65	41.74	36.070	35.998	16.68	17.20		20.08		27.21
	5550	45.52	41.47	36.164	35.933	19.00	18.88		22.07		27.18
	5670	42.84	42.04	36.034	36.038	17.90	18.35		21.26		27.24
	5710	42.07	41.09	36.116	35.998	17.21	17.60		20.54		27.14
Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	31.16	35.14	36.115	36.074	17.98	18.45	0.123	21.35	30	N/A
	5795	30.91	33.24	36.114	36.083	18.25	18.79		21.66		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	84.04	84.50	75.094	75.048	14.64	14.51	N/A	17.59	24	N/A
U-NII Band 2A	5290	85.04	81.89	75.121	74.979	14.90	14.84		17.88		30.13
U-NII Band 2C	5530	83.11	81.88	75.039	75.084	15.68	15.44		18.57		30.13
	5610	86.57	86.28	75.250	75.311	18.30	17.98		21.15		30.36
	5690	85.45	88.07	75.279	75.116	18.18	17.90		21.05		30.32
Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	67.59	66.95	75.048	74.889	18.64	18.60	N/A	21.63	30	N/A

Mode 802.11ac- VHT160	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	162.40	162.30	153.410	153.010	11.59	11.69	0.097	14.75	24	33.10
U-NII Band 2C	5570	164.50	162.40	153.070	153.070	14.71	14.74		17.83		33.11

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	22.65	22.54	18.874	18.926	16.57	17.32	N/A	19.97	24	N/A
	5200	22.47	22.32	18.865	18.888	16.86	17.53		20.22		
	5240	23.36	22.68	18.882	18.868	17.16	17.60		20.40		
U-NII Band 2A	5260	23.44	23.57	18.917	18.849	17.57	17.91		20.75		24.70
	5300	23.47	23.48	18.874	18.870	17.68	17.86		20.78		24.71
	5320	23.36	22.99	18.896	18.857	17.32	17.77		20.56		24.62
U-NII Band 2C	5500	24.66	22.37	18.847	18.845	17.78	18.29		21.05		24.50
	5580	23.19	23.15	18.852	18.889	17.28	17.77		20.54		24.65
	5700	23.28	23.26	18.896	18.863	16.61	17.10		19.87		24.67
	5720	23.75	24.15	18.877	18.915	17.94	18.20		21.08		24.76
Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	14.36	13.83	18.880	18.892	17.53	18.21	N/A	20.89	30	N/A
	5785	16.47	15.85	18.870	18.875	18.18	18.67		21.44		
	5825	11.45	15.61	18.820	18.919	18.69	18.54		21.63		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	42.45	41.83	37.492	37.453	14.73	15.33	N/A	18.05	24	N/A
	5230	40.87	42.83	37.442	37.453	17.76	18.03		20.91		
U-NII Band 2A	5270	41.95	40.11	37.532	37.400	18.41	17.96		21.20		27.03
	5310	40.85	40.79	37.533	37.512	15.03	15.49		18.28		27.11
U-NII Band 2C	5510	42.60	41.19	37.516	37.440	16.64	17.07		19.87		27.15
	5550	42.37	41.02	37.437	37.371	18.06	18.83		21.47		27.13
	5670	42.27	41.23	37.556	37.478	18.16	18.30		21.24		27.15
	5710	42.29	41.37	37.522	37.512	16.95	17.38		20.18		27.17
Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	35.86	34.73	37.426	37.494	18.29	18.70	N/A	21.51	30	N/A
	5795	37.08	35.72	37.450	37.533	18.04	18.53		21.30		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
		U-NII Band 1	5210	81.59	81.88	76.585	76.501				
U-NII Band 2A	5290	83.01	83.31	76.746	76.673	14.65	14.43	17.55	30.19		
U-NII Band 2C	5530	82.37	82.38	76.611	76.539	15.31	15.15	18.24	30.16		
	5610	81.08	82.42	76.618	76.799	18.08	17.60	20.86	30.09		
	5690	81.98	83.95	76.693	76.705	17.92	17.60	20.77	30.14		
Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	72.46	71.35	76.565	76.663	18.42	18.32	N/A	21.38	30	N/A

Note: 1. The results have been included cable loss.

2. Duty cycle factor is not applicable for duty cycle > 98%, please refer to section 3.7.

3. Max. Average Output Power= The Max. of Average Output Power (AUX or Main)+ Duty Cycle Factor.

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	163.10	162.40	155.41	155.04	11.63	11.51	0.097	14.68	24	33.11
U-NII Band 2C	5570	163.40	162.50	154.54	154.7.3	14.71	14.55		17.74	33.11	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	26/0	20.37	20.70	18.501	18.674	10.29	10.05	0.150	13.33	24	N/A
		52/37	21.32	21.26	18.280	18.422	13.69	14.17		17.09		
		106/53	20.96	20.95	18.313	18.212	16.00	16.43		19.38		
U-NII Band 2A	5320	26/8	20.48	20.05	18.569	18.377	9.62	9.82		12.88		24.02
		52/40	21.56	21.68	18.030	17.896	12.63	13.13		16.05		24.34
		106/54	23.21	22.37	18.161	18.102	15.33	15.71		18.68		24.50
U-NII Band 2C	5500	26/0	20.21	20.13	18.589	18.617	9.90	9.79		13.00		24.04
		52/37	21.25	21.63	18.460	18.428	13.13	13.67		16.57		24.27
		106/53	22.89	22.91	18.303	18.212	14.78	15.11		18.11		24.60
	5700	26/8	20.48	20.35	18.685	18.689	9.93	10.00		13.13		24.09
		52/40	21.73	20.75	18.494	18.373	14.06	13.24		16.83		24.17
		106/54	22.82	23.09	18.273	18.207	16.54	15.96		19.42		24.58
Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	26/0	16.980	14.480	18.554	18.492	14.84	14.82	0.150	17.99	30	N/A
		52/37	17.040	16.990	18.424	18.856	16.06	16.00		19.19		
		106/53	17.120	17.150	18.301	18.292	17.34	17.16		20.41		
	5825	26/8	2.071	17.010	18.484	18.521	15.17	15.30		18.39		
		52/40	17.030	17.040	18.452	18.151	13.54	14.06		16.97		
		106/54	17.200	17.080	18.401	17.402	16.36	17.06		19.88		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	242/61	24.08	24.31	18.716	18.707	17.25	17.60	N/A	20.44	24	N/A
U-NII Band 2A	5310	242/62	22.78	25.39	18.667	18.691	16.60	16.35		19.49		24.58
U-NII Band 2C	5510	242/61	23.06	23.04	18.681	18.694	15.76	16.08		18.93		24.62
	5670	242/62	23.04	22.13	18.741	18.691	17.45	18.10		20.80		24.45
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	242/61	18.10	16.63	18.728	18.735	18.15	18.54	N/A	21.36	30	N/A
	5795	242/62	15.85	16.08	18.694	18.662	18.11	18.39		21.26		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	484/65	41.60	41.72	37.180	37.349	14.75	15.23	N/A	18.01	24	N/A
U-NII Band 2A	5290	484/66	41.52	41.27	37.140	37.062	12.50	11.82		15.18		27.16
U-NII Band 2C	5530	484/65	43.09	40.98	37.184	37.095	14.58	14.62		17.61		27.13
	5610	484/66	41.56	42.58	36.999	37.260	18.22	18.44		21.34		27.19
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	484/65	37.06	36.90	37.239	37.119	17.79	18.06	N/A	20.94	30	N/A
		484/66	36.52	37.10	37.132	37.396	18.28	18.60		21.45		

Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	996/97	84.37	81.55	76.878	76.892	14.68	14.46	N/A	17.58	24	30.11
		996/S67	82.23	85.05	76.957	76.693	12.63	12.42		15.54		30.15
U-NII Band 2C	5570	996/97	82.35	81.48	76.869	76.888	14.49	14.28		17.40		30.11
		996/S67	82.92	82.91	76.779	76.854	18.33	17.96		21.16		30.19

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.


3. B is the 26 dB emission bandwidth


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303


A.3.2 Measurement Plots

- Maximum Output Power

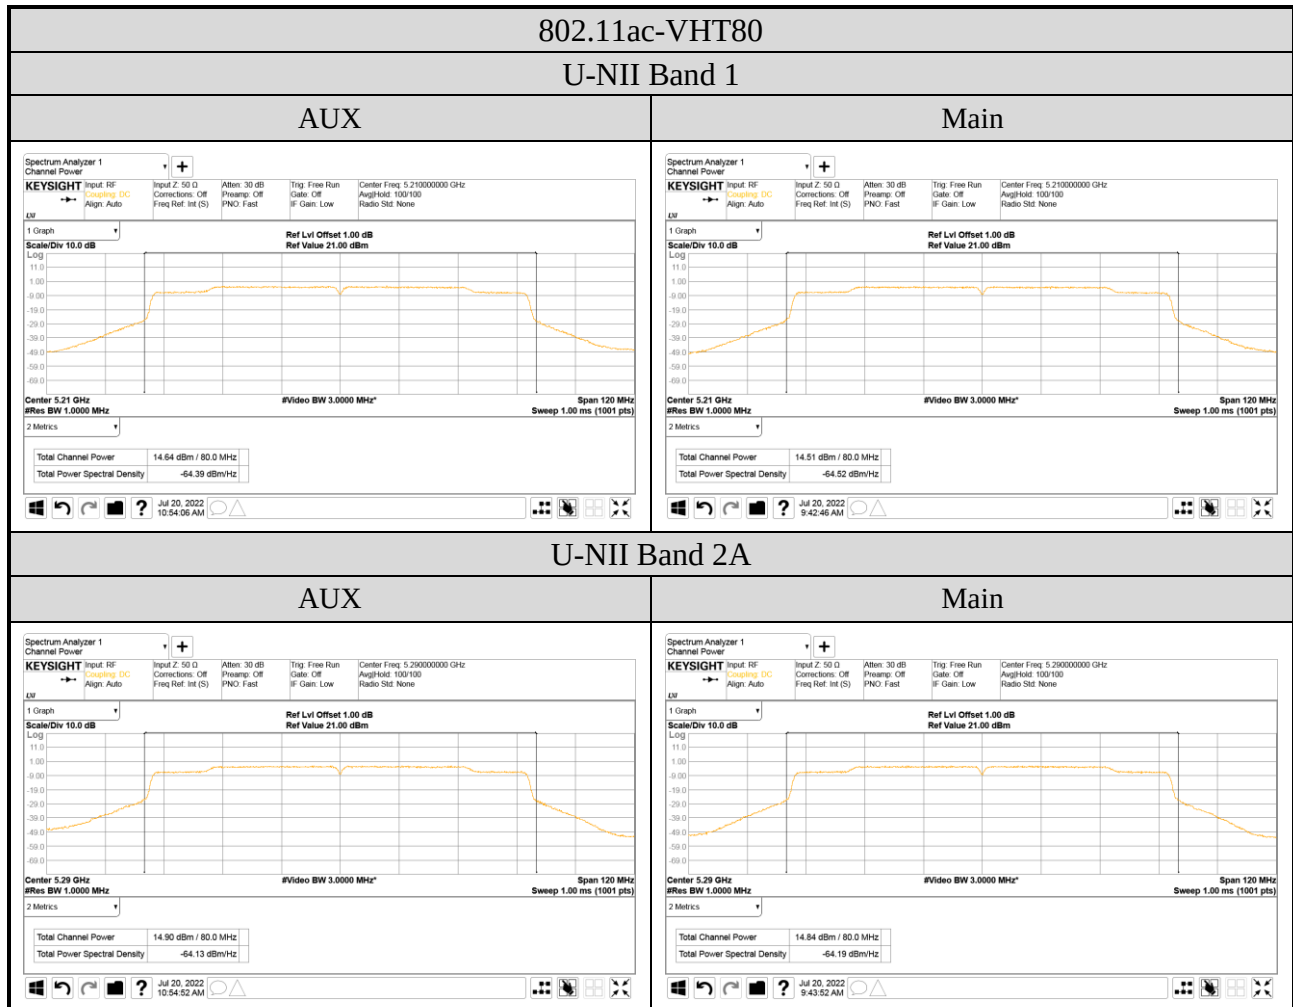

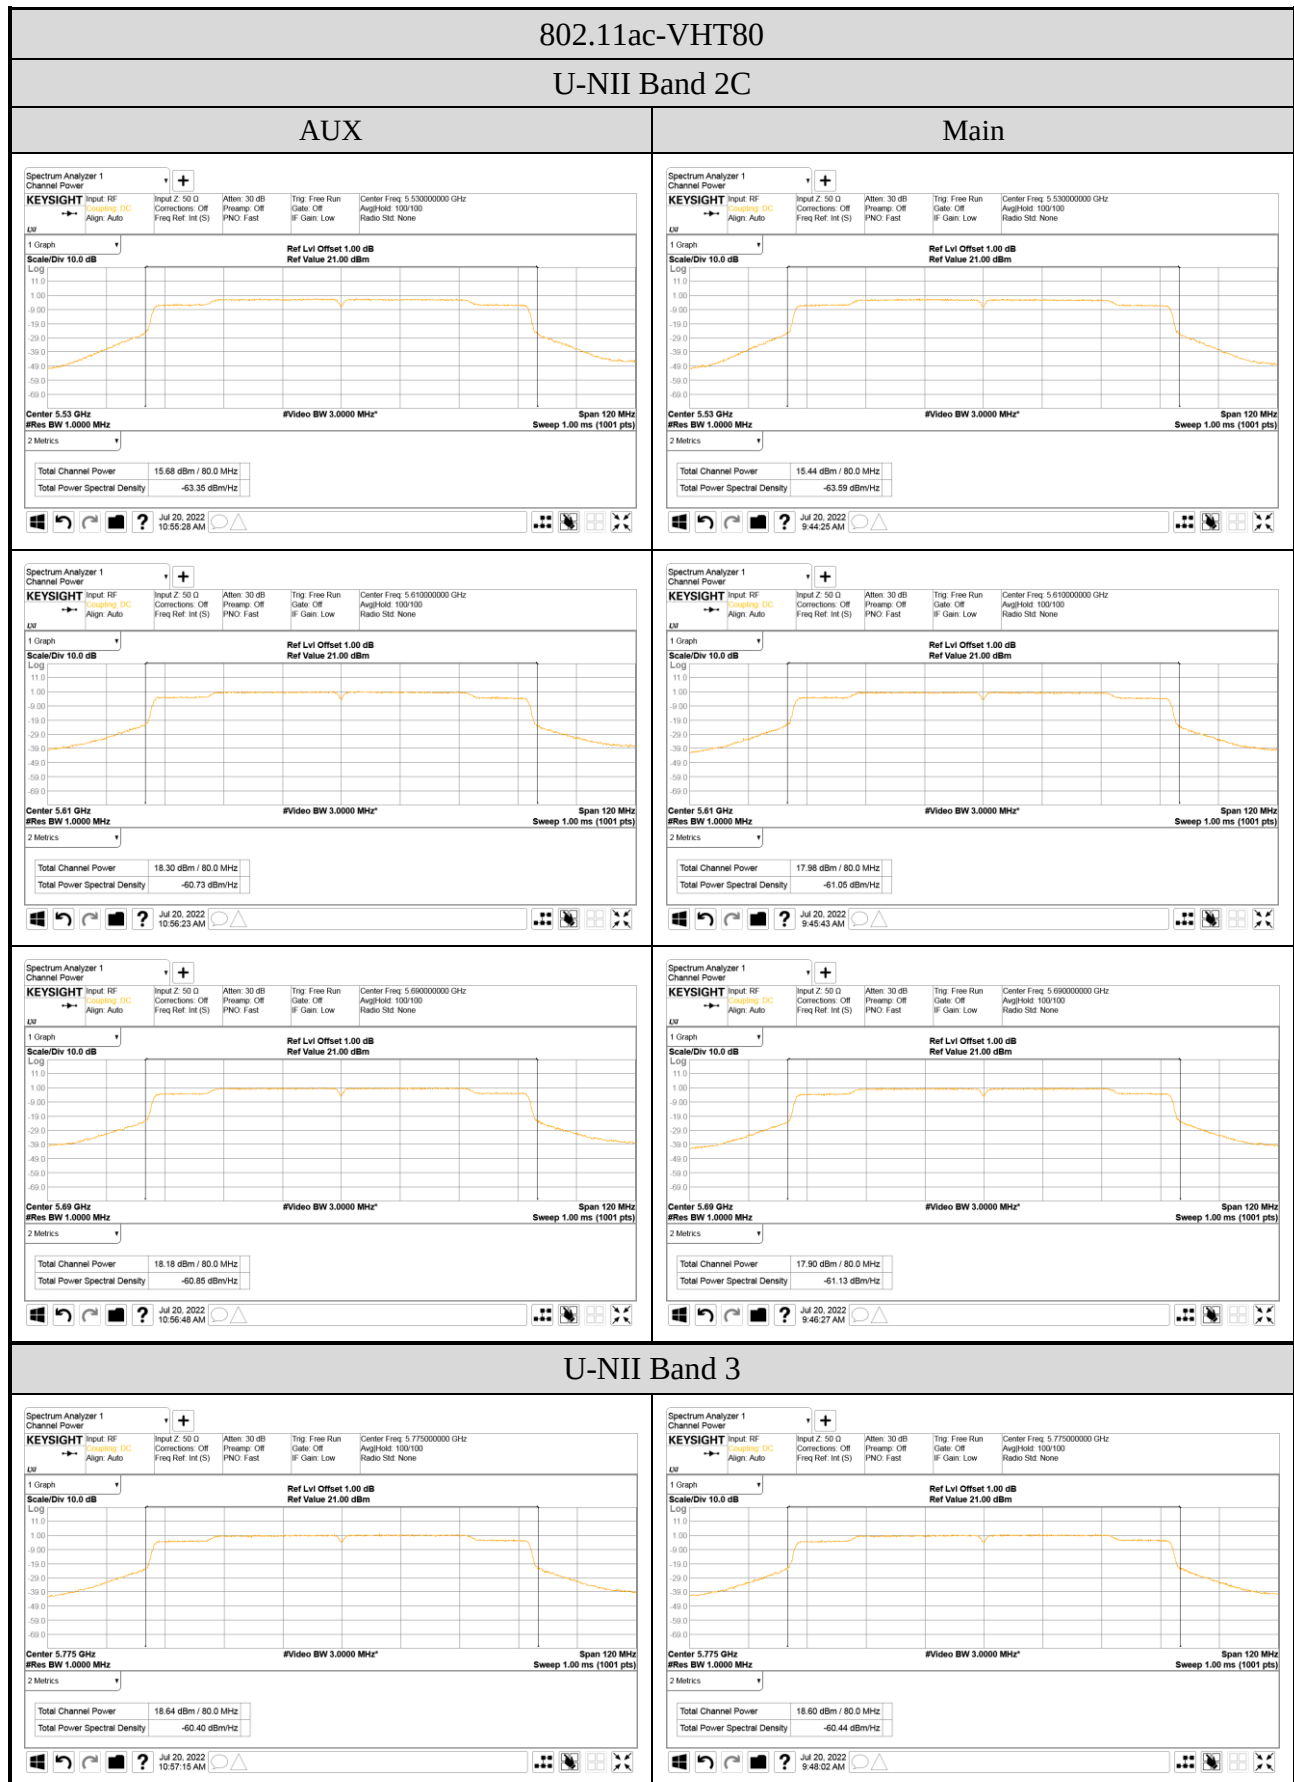


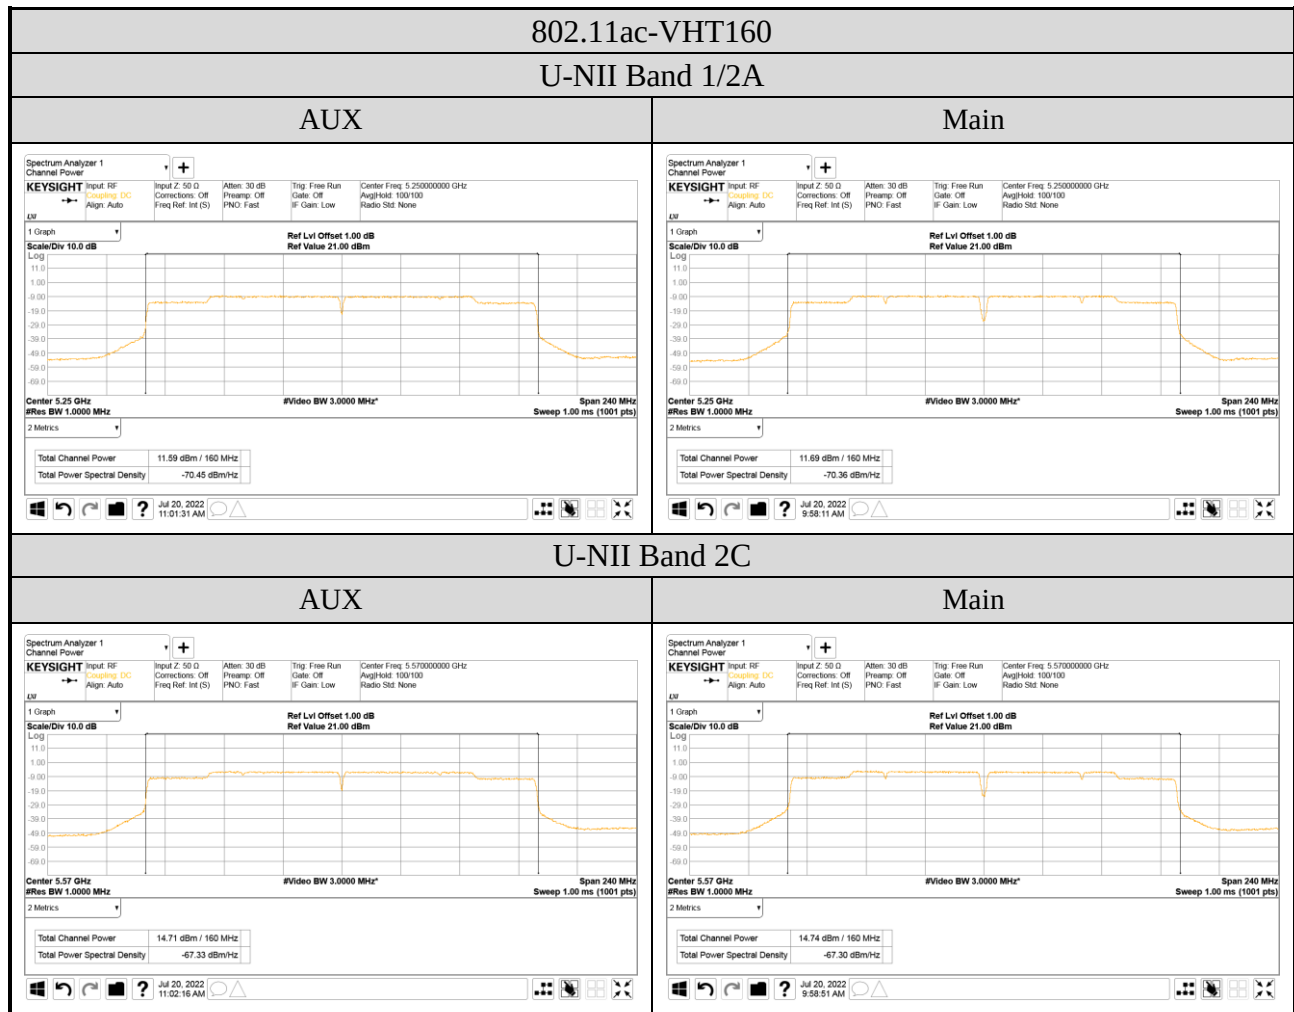

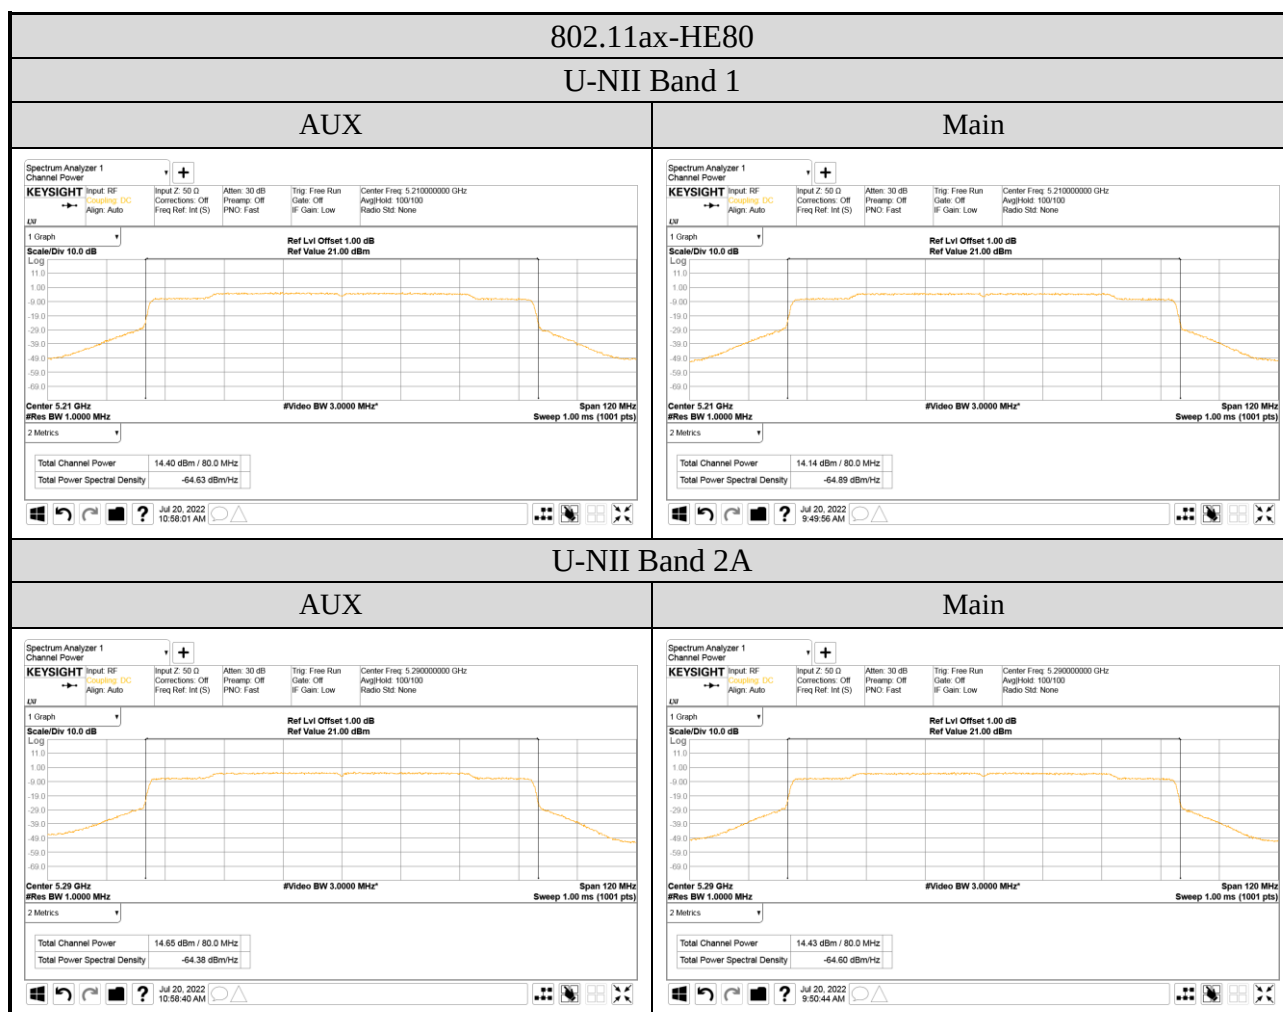




Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

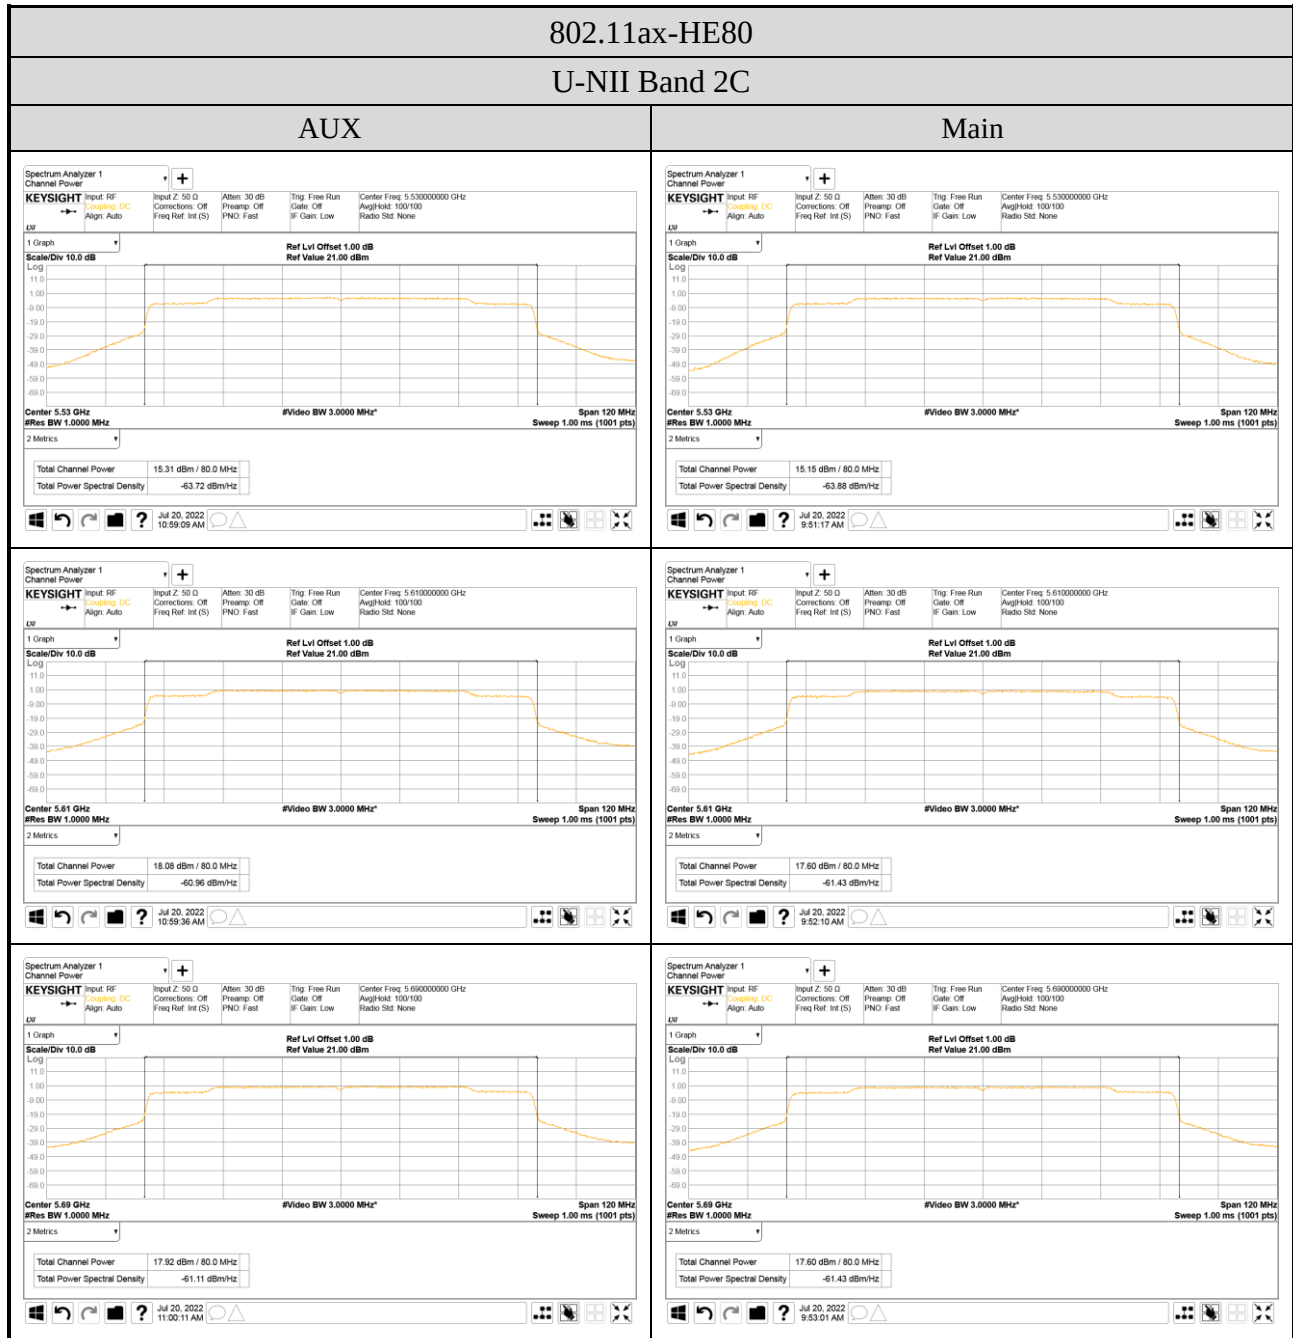


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

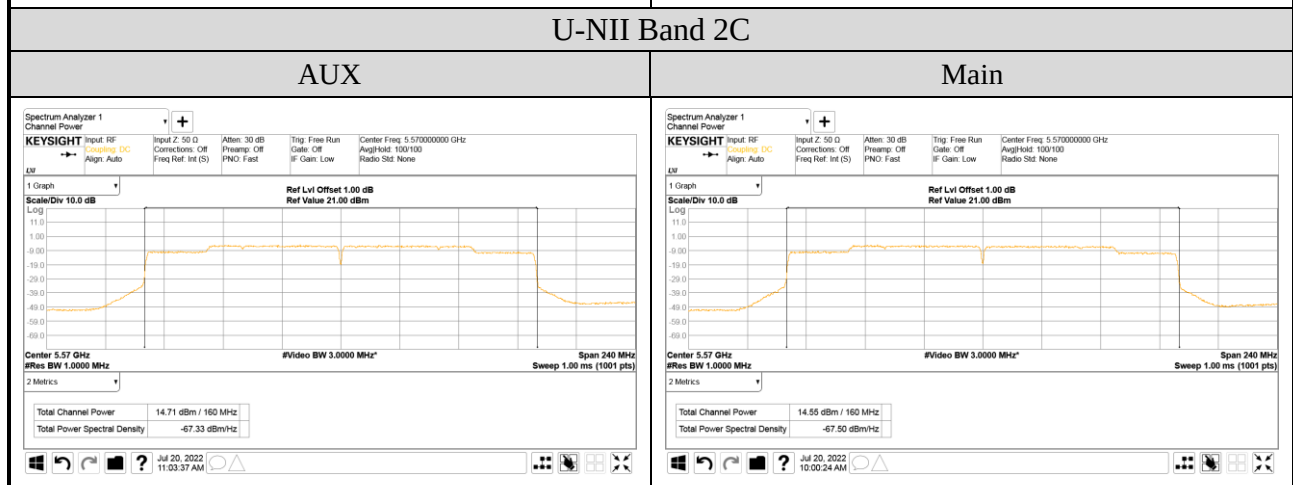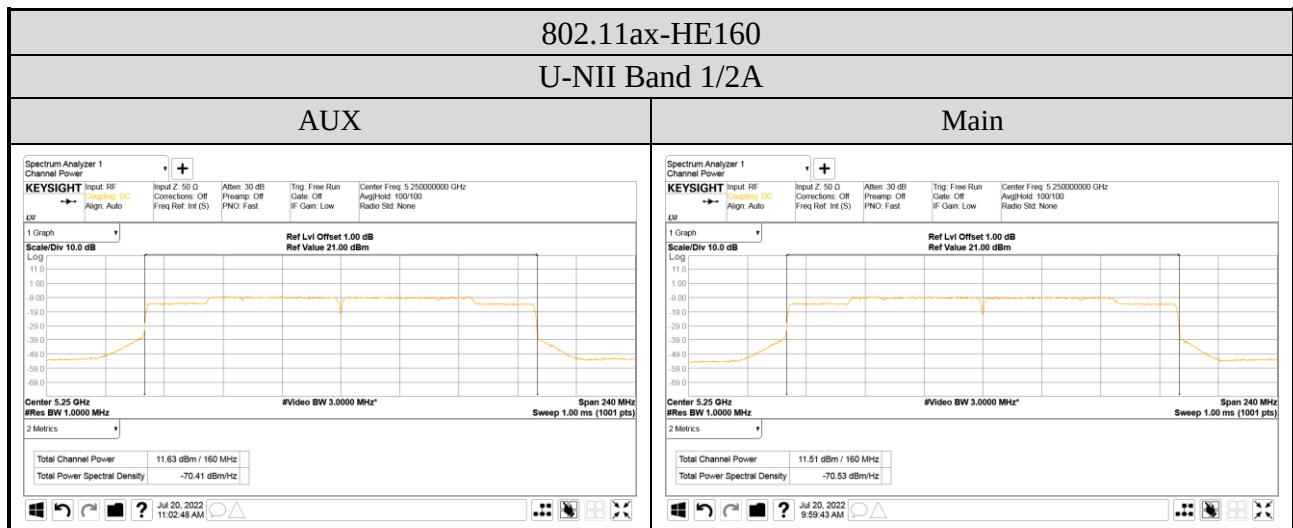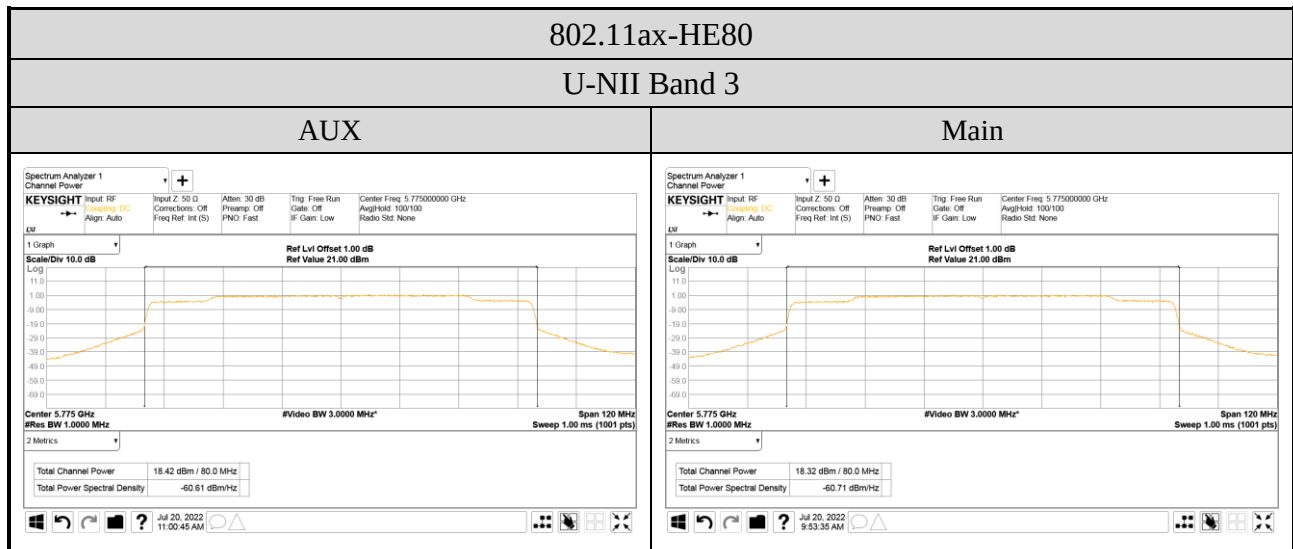


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

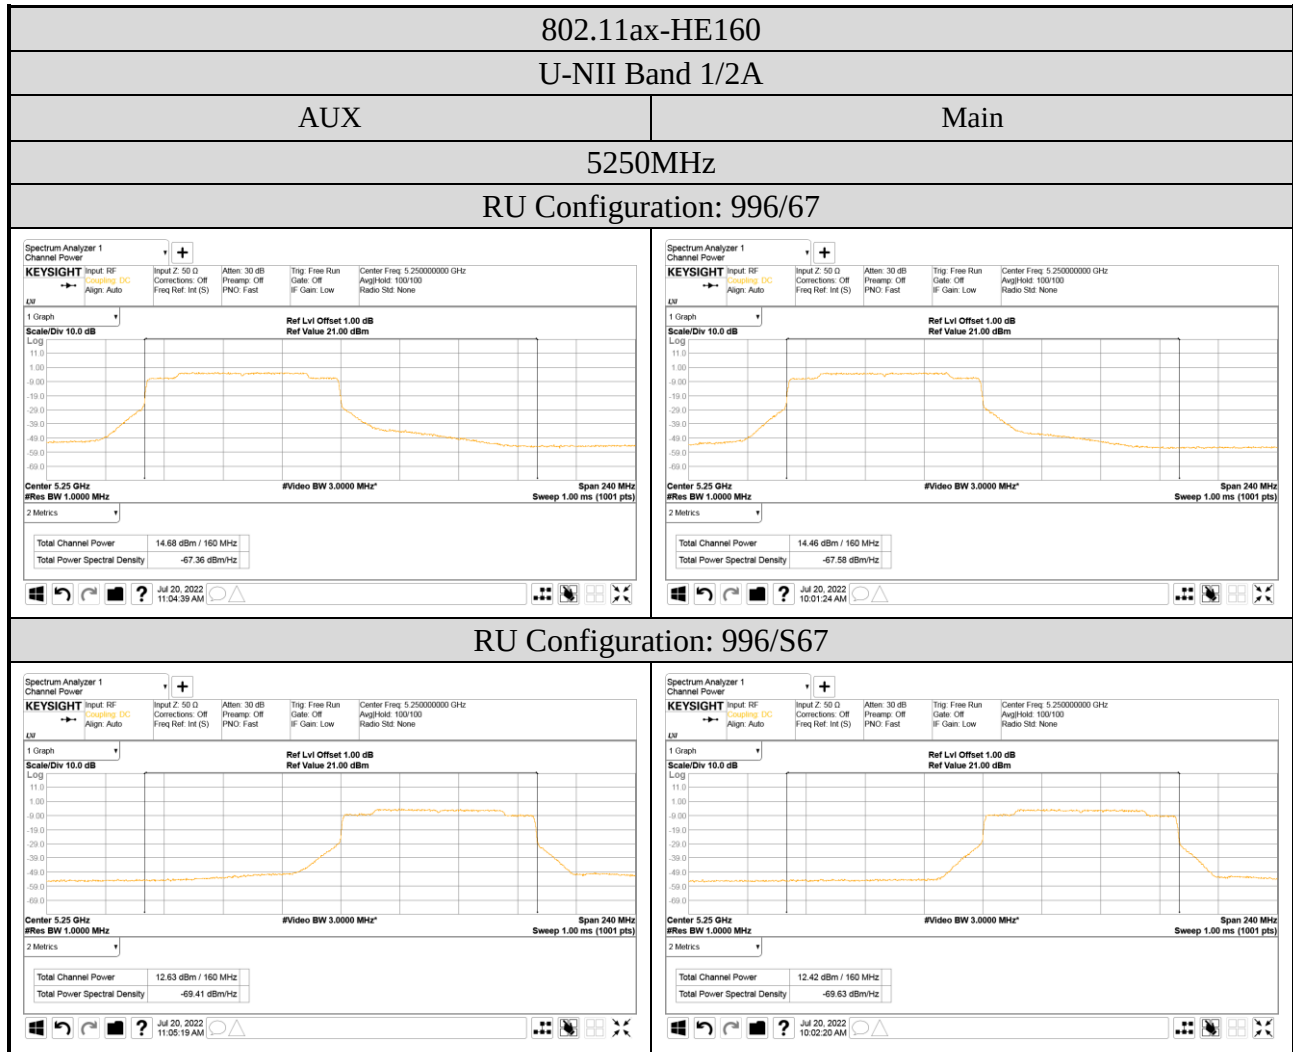

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

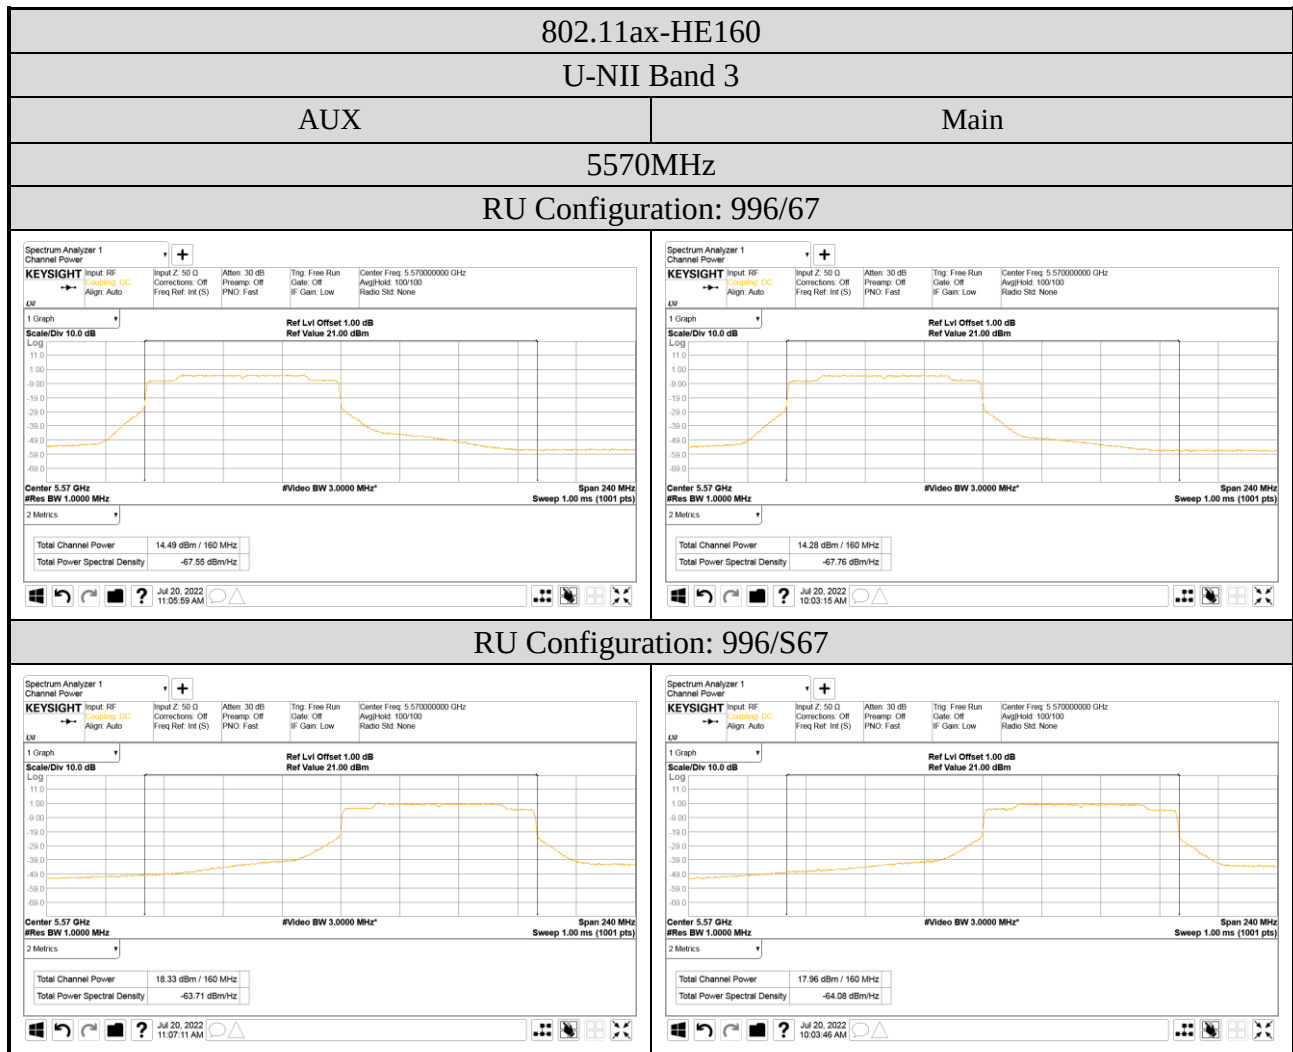


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● Emission (26dB) Bandwidth

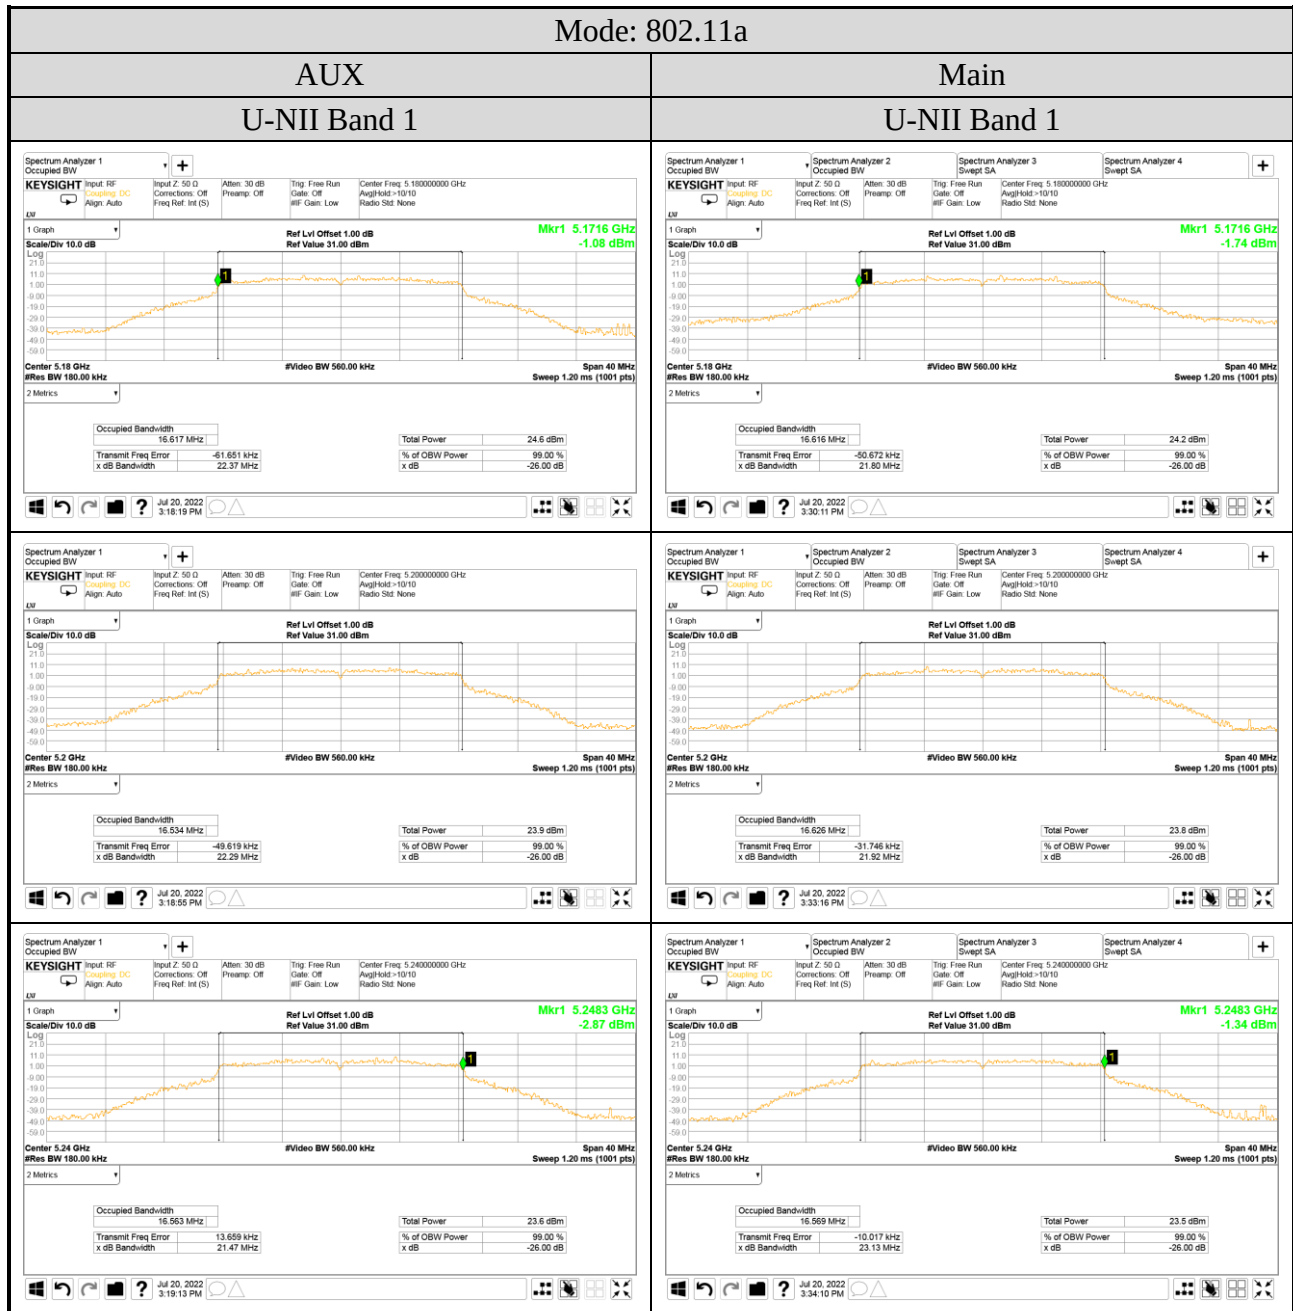

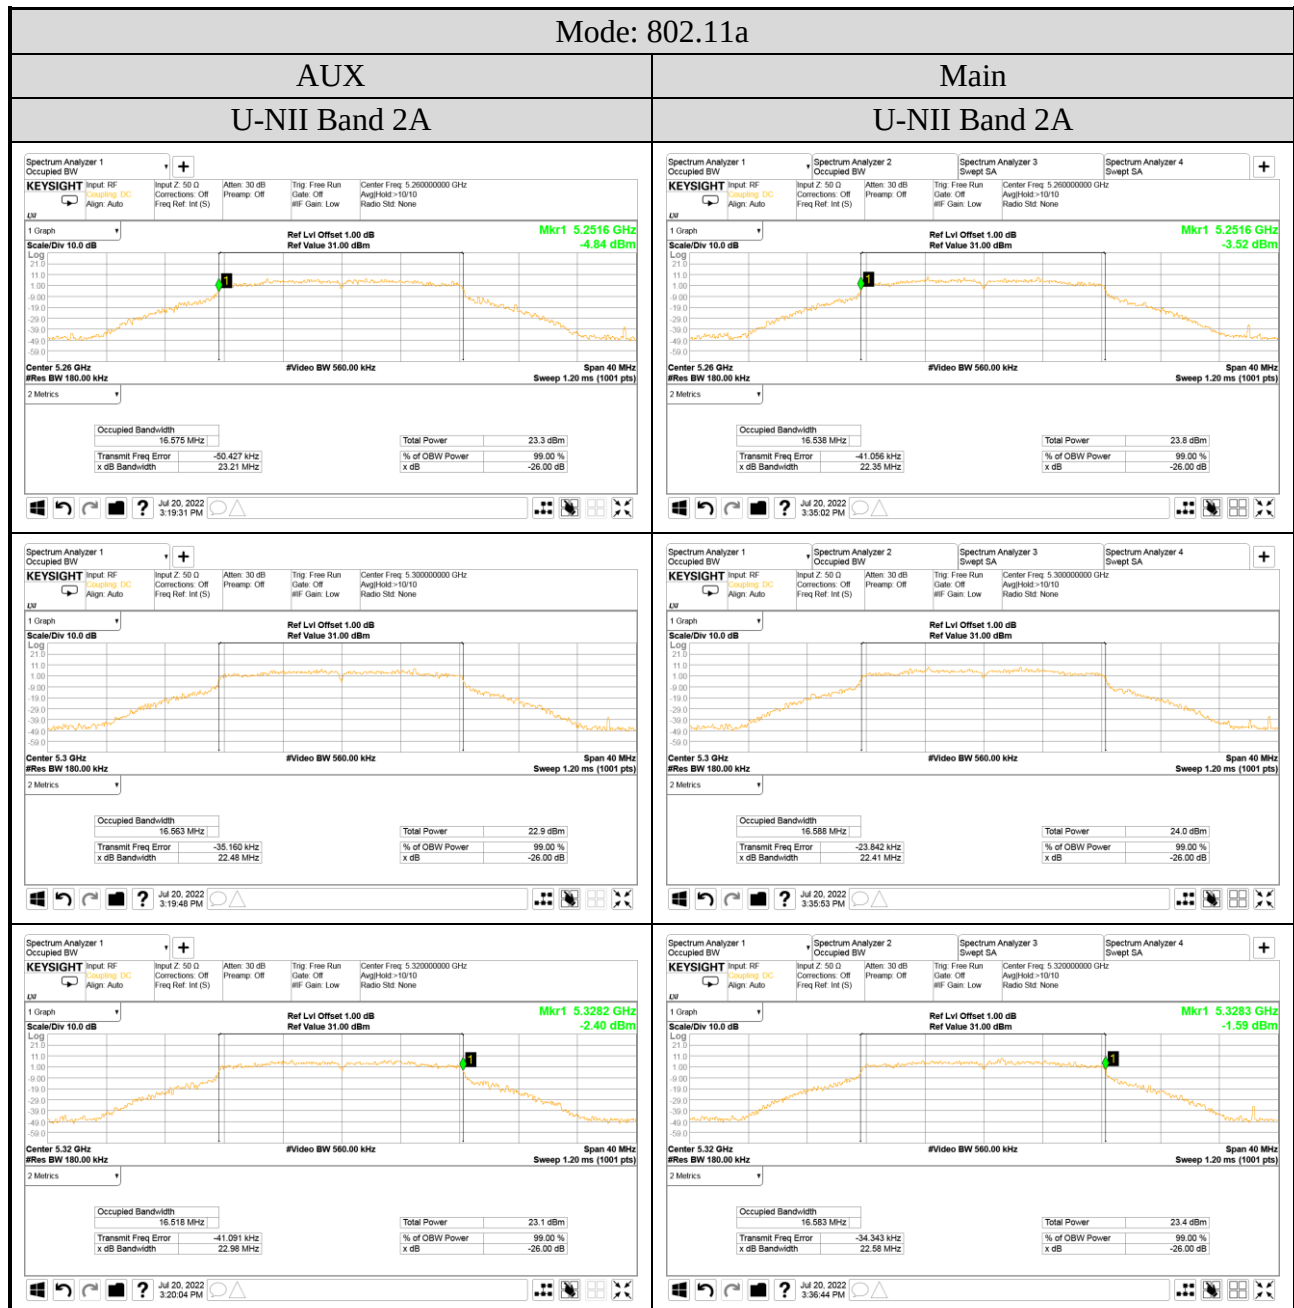


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

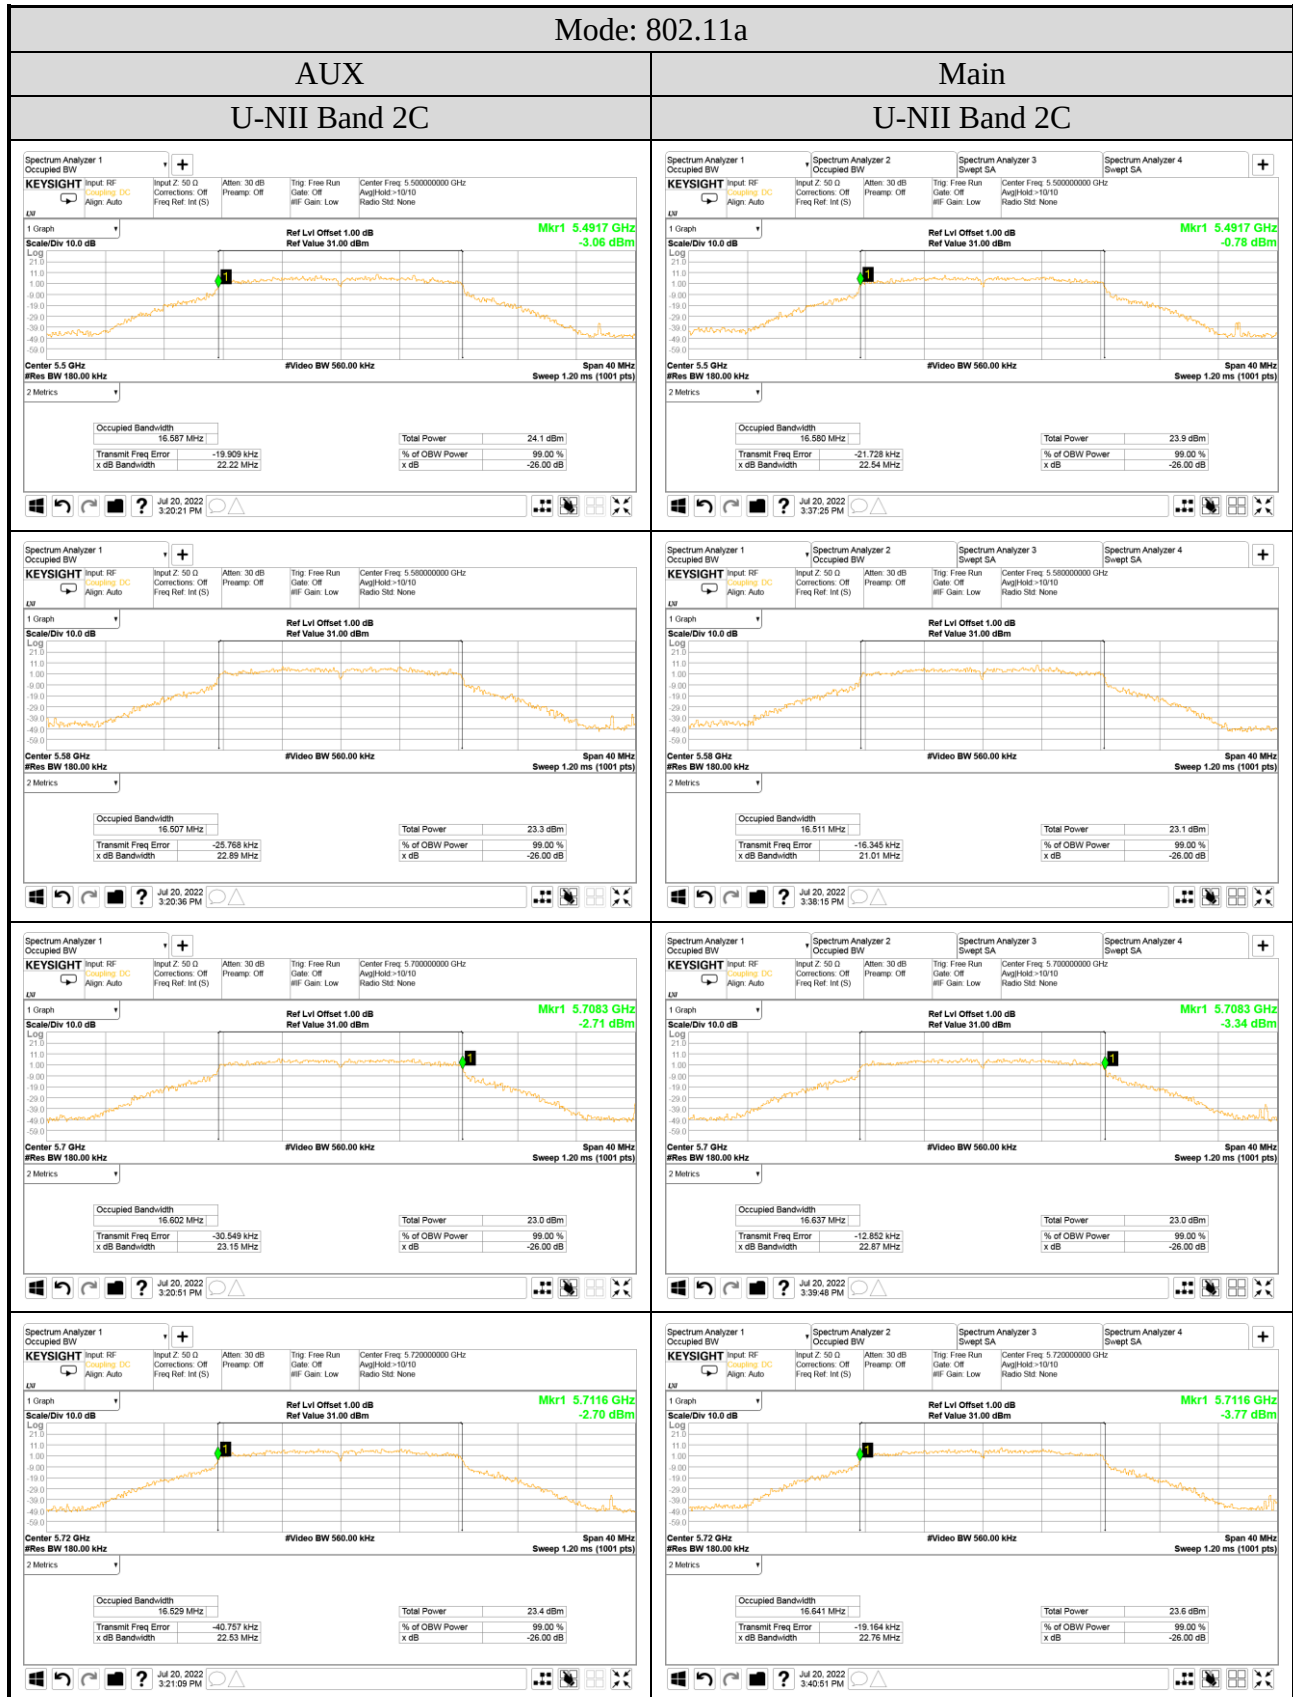


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

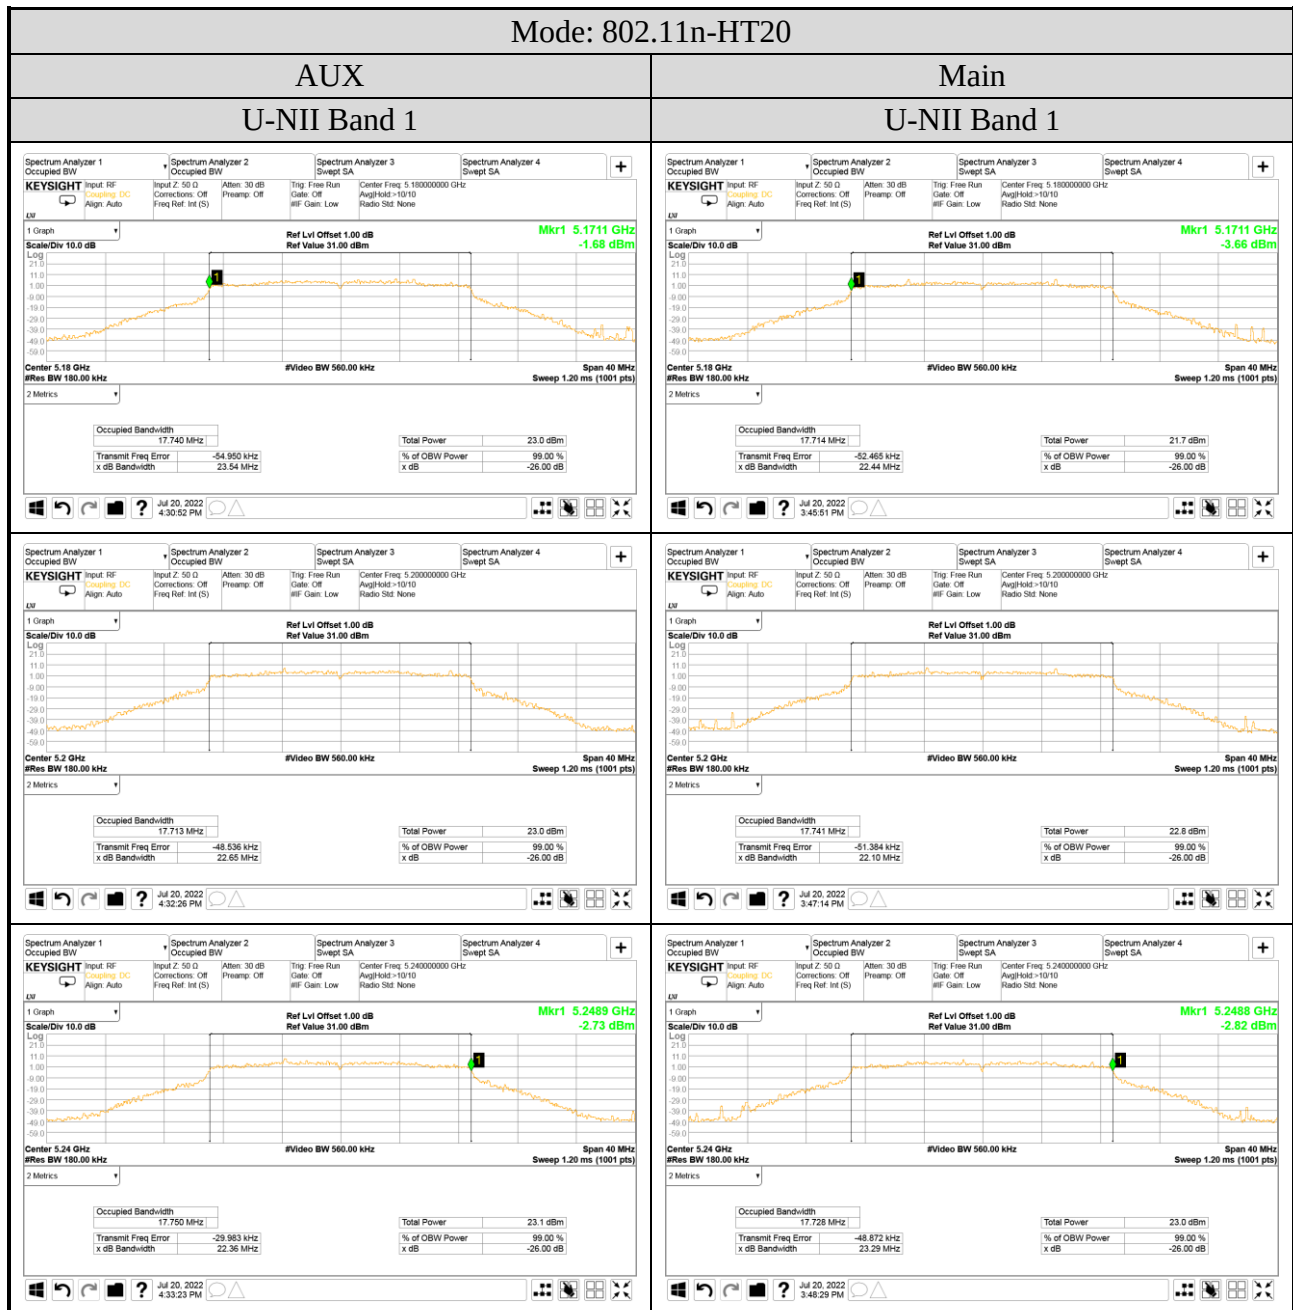


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

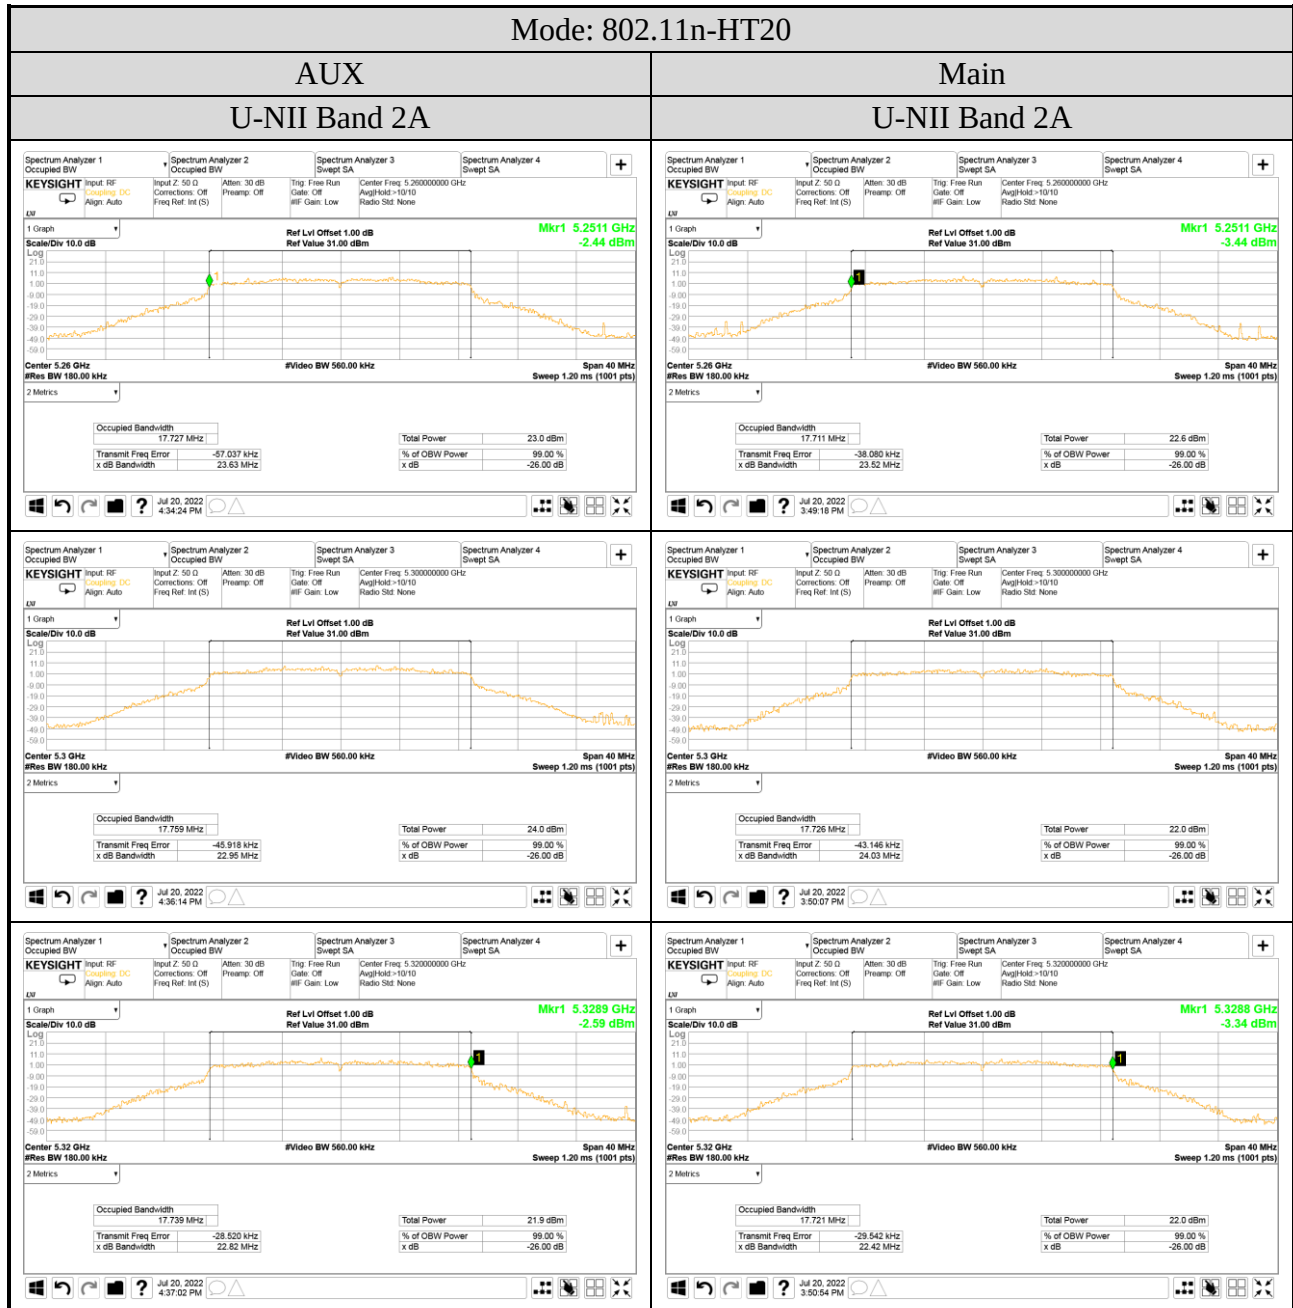

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

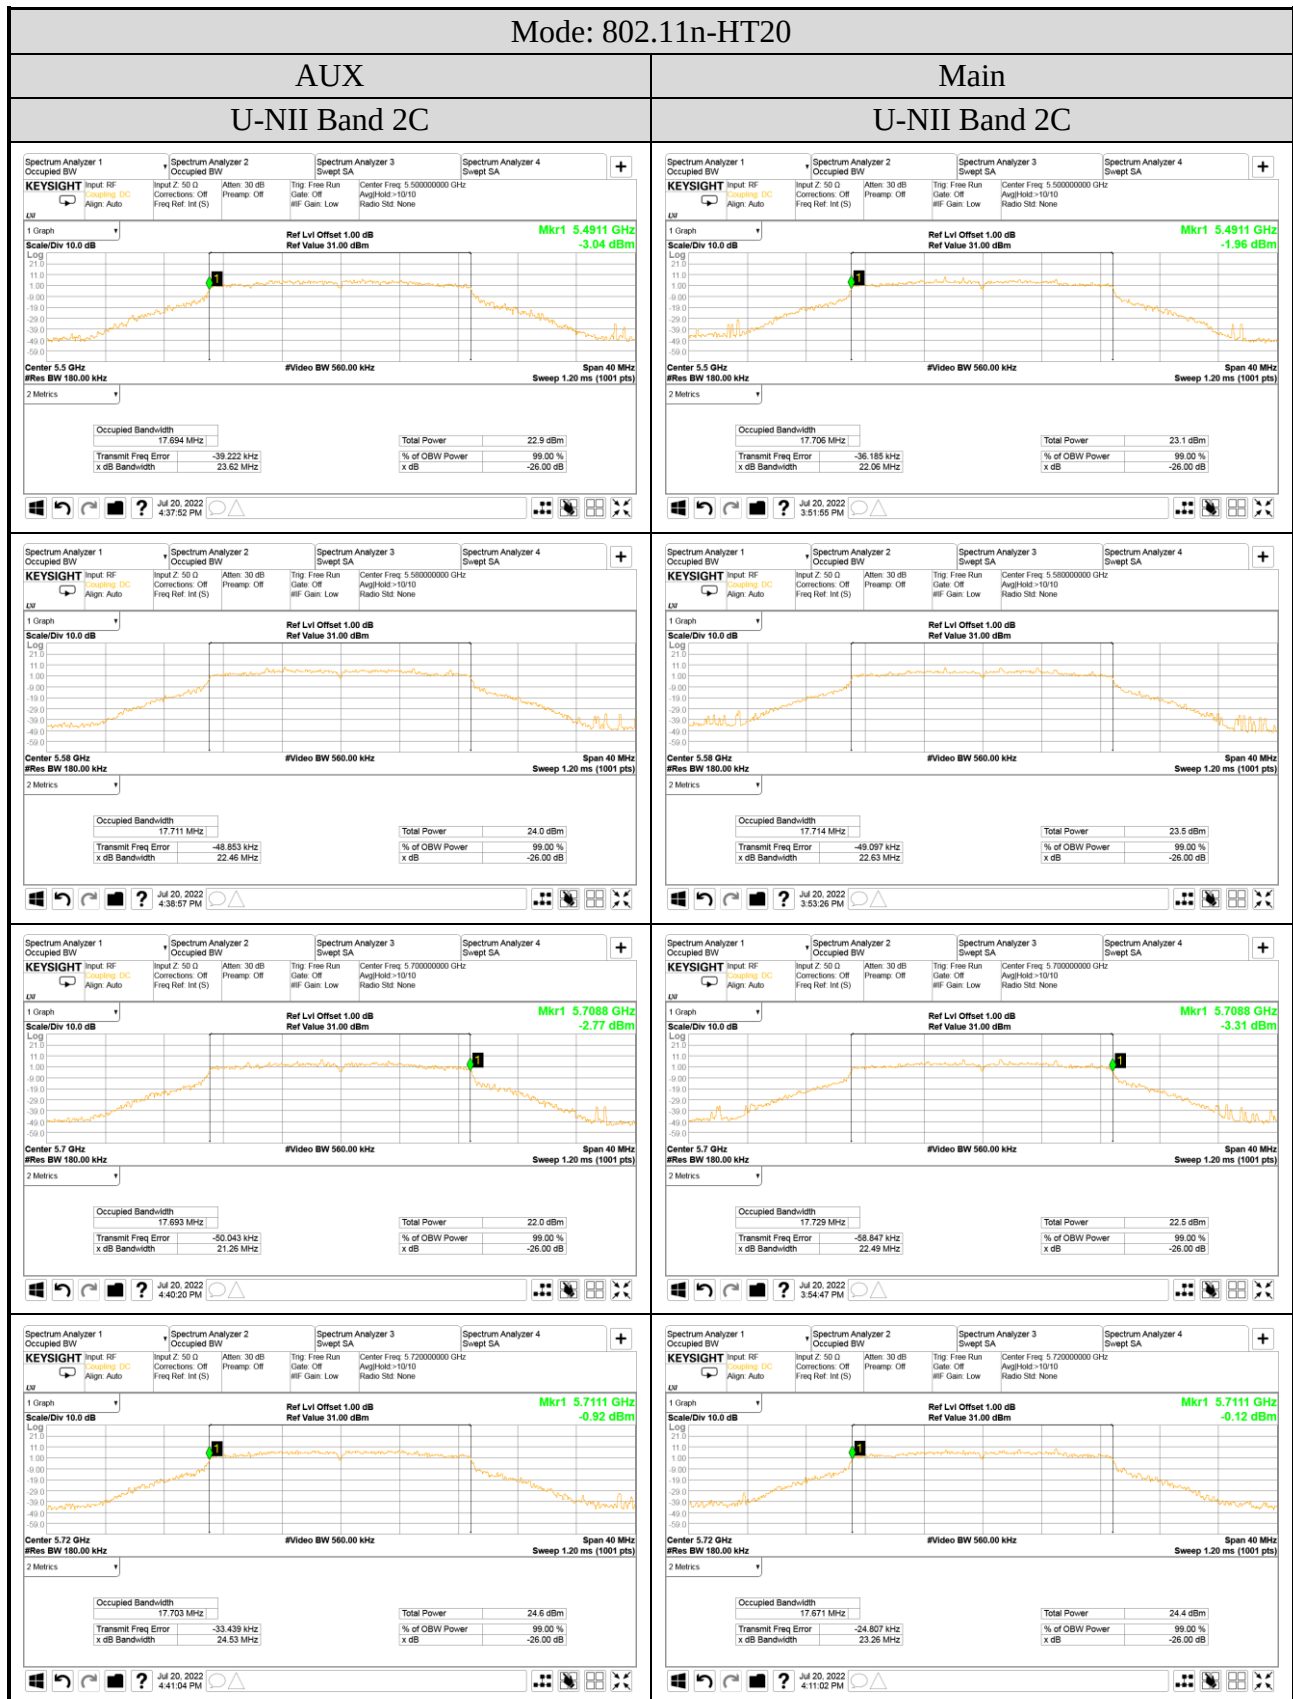

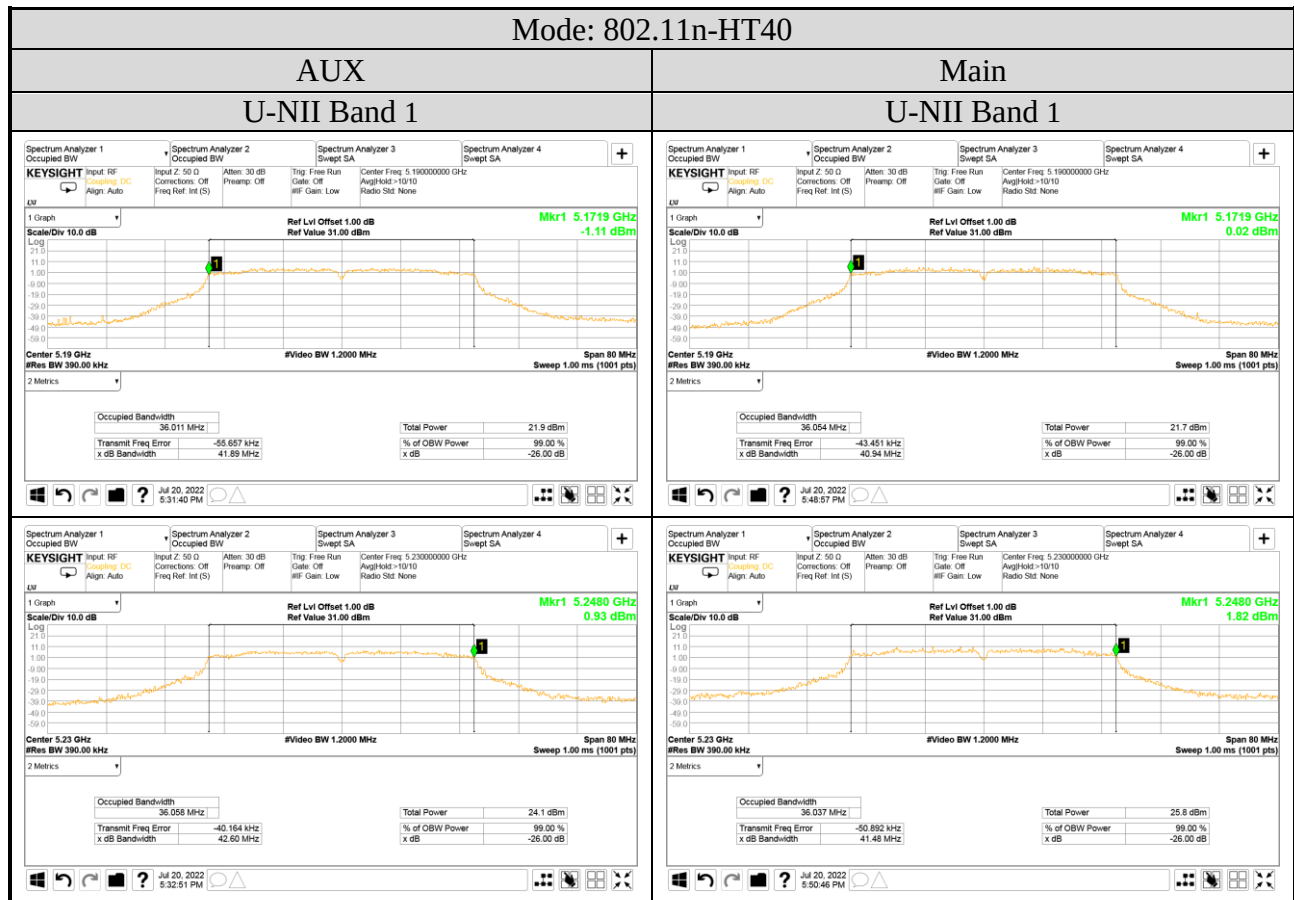

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

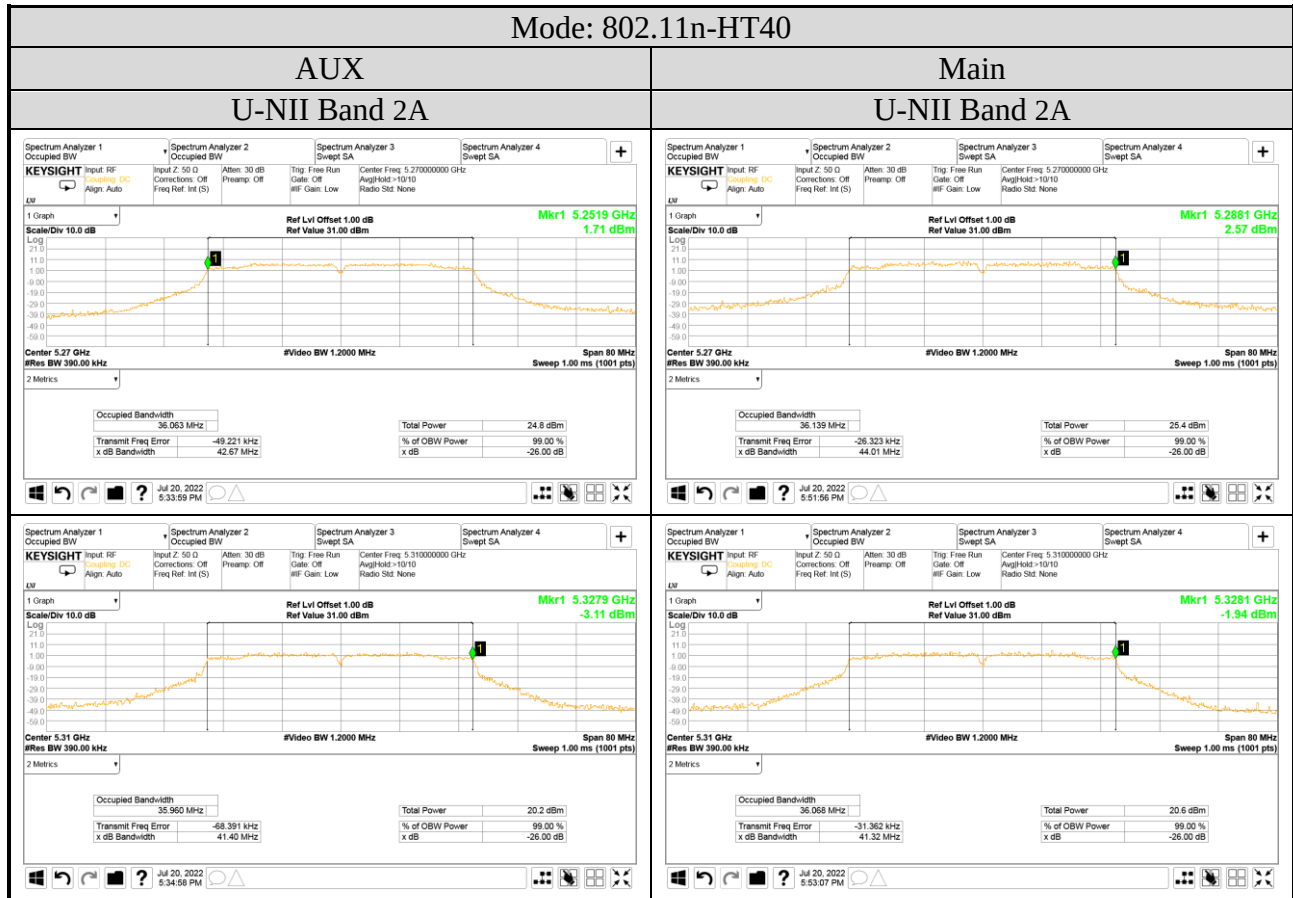


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303

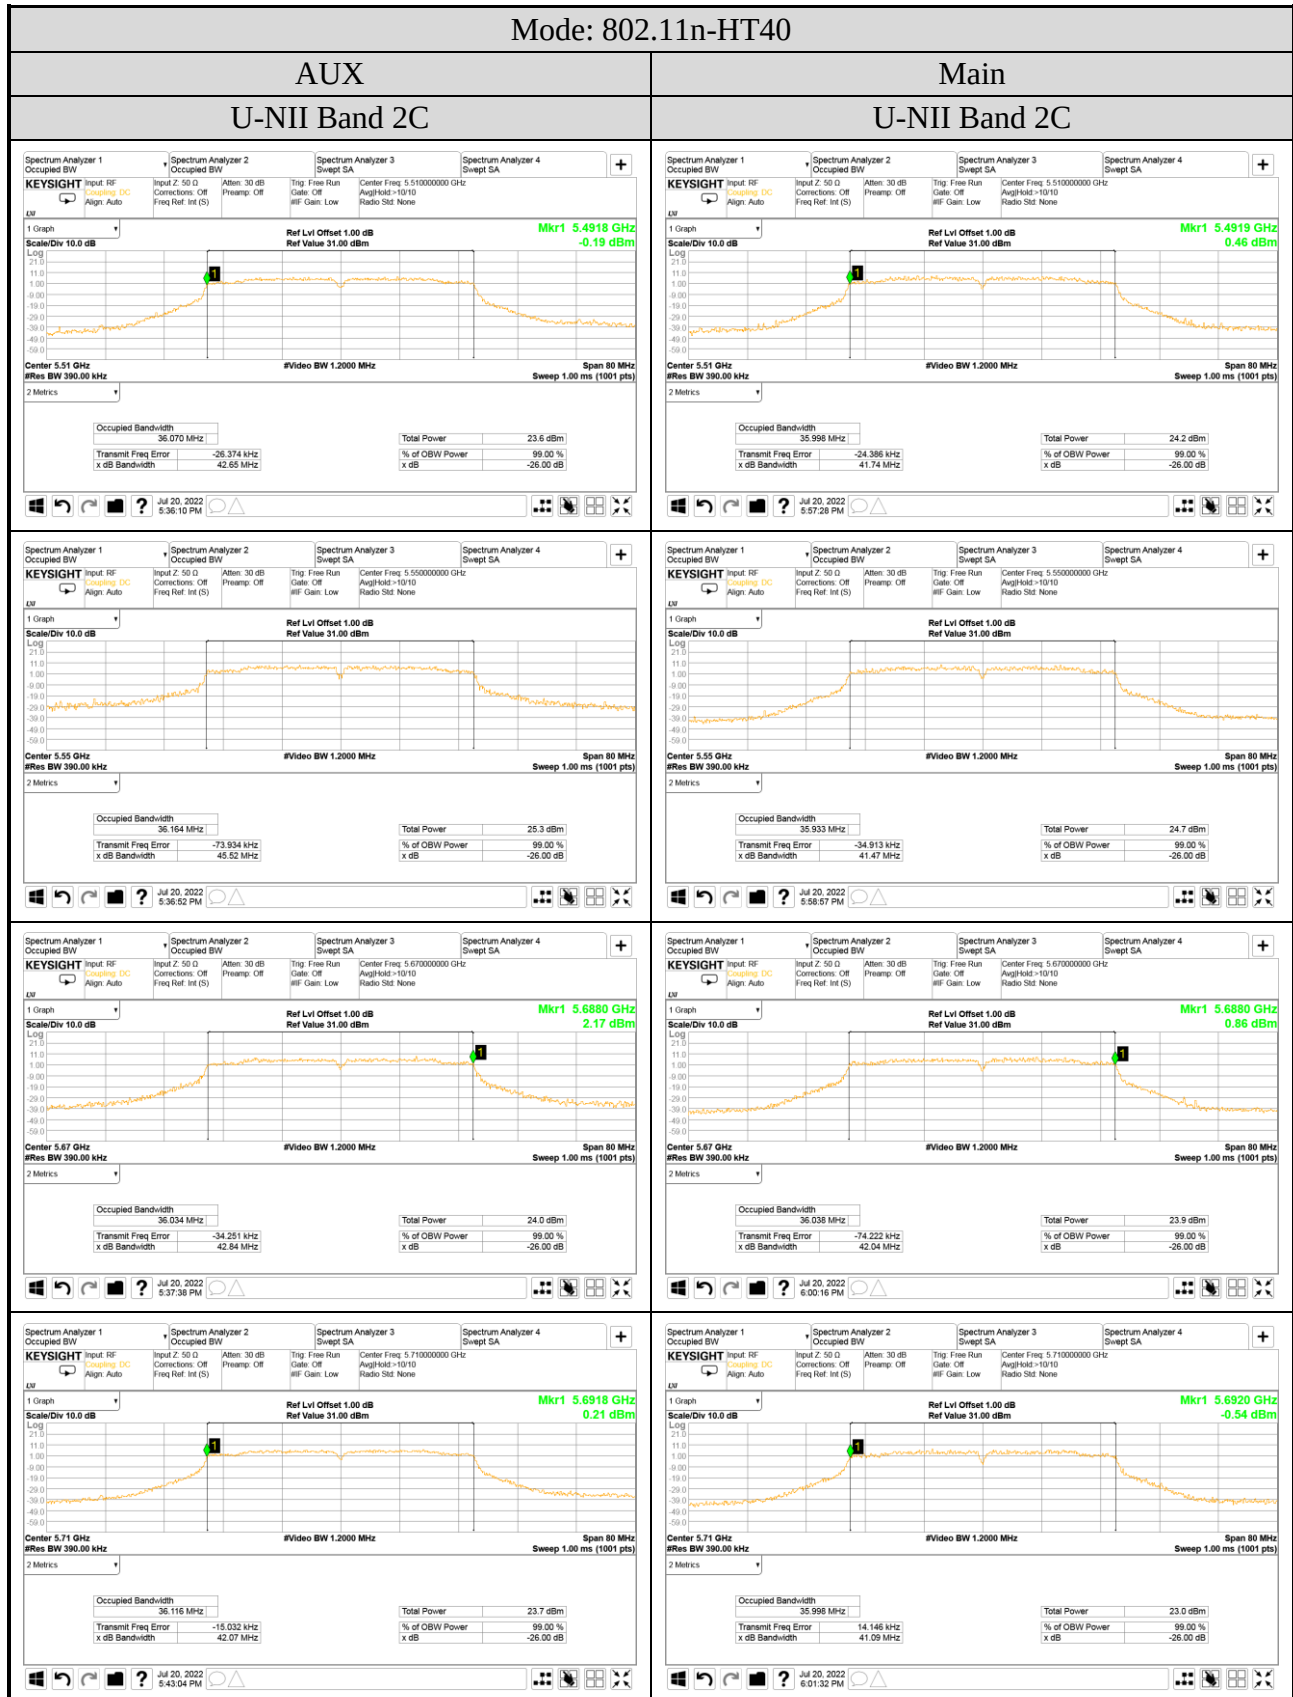

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

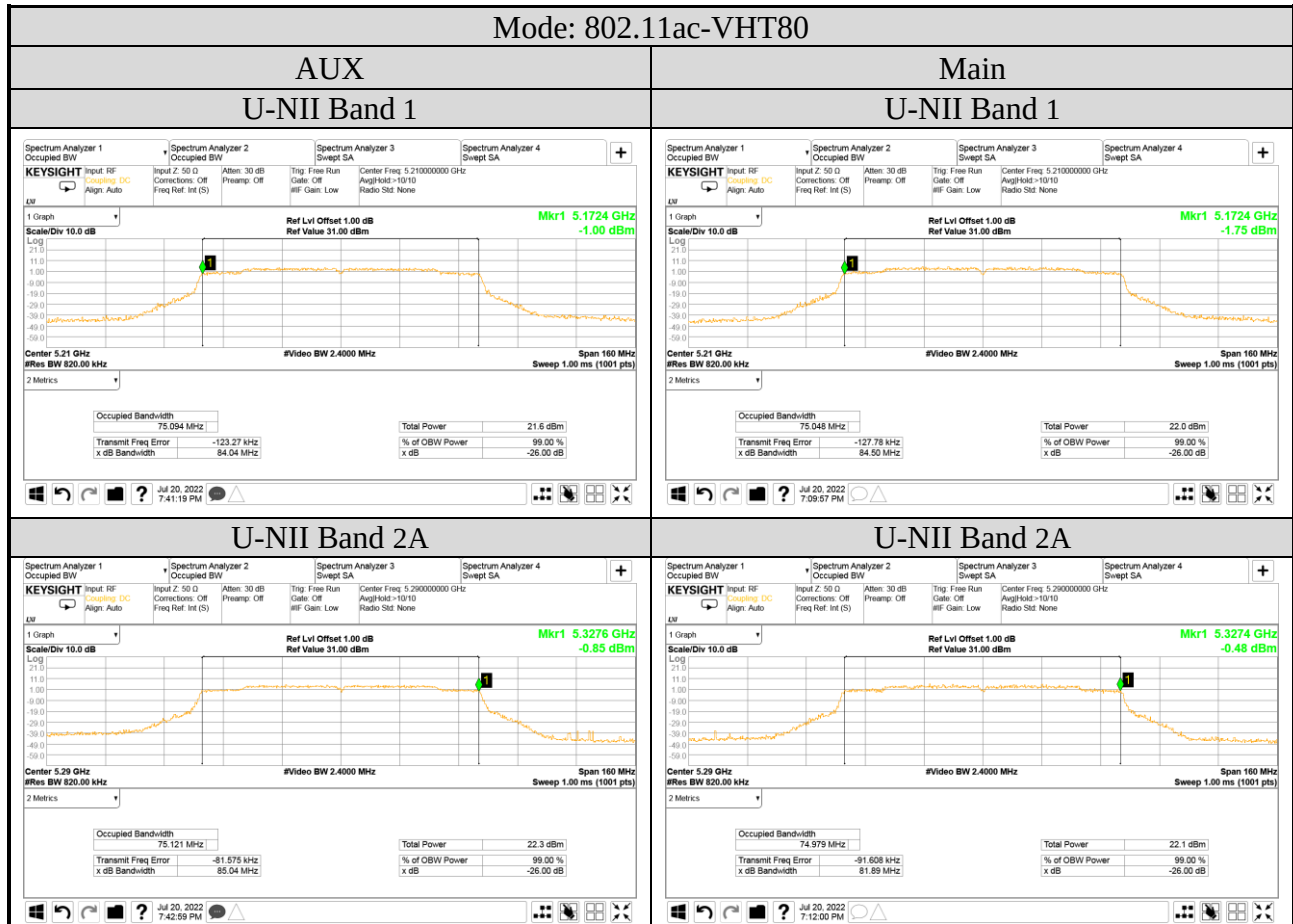

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

