

FCC 15.407
(Permissive Change)
WLAN 6GHz Test Report

for

LG Electronics Inc.

222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,
17709 Republic of Korea

Product Name : Notebook Computer
Model Name : (1)16Z90R (2)16ZB90R
(3)16ZD90R (4)16ZG90R
Brand LG
FCC ID : BEJNT-16Z90R

Prepared by: : AUDIX Technology Corporation,
EMC Department



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TABLE OF CONTENTS

Description	Page
TEST REPORT.....	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Reference Test Guidance.....	9
3.4. Information for Permissive Change.....	9
3.5. Antenna Information	10
3.6. EUT Specifications Assessed in Current Report	11
3.7. Description of Key Components	14
3.8. Test Configuration.....	17
3.9. Output Power Setting	24
3.10. Tested Supporting System List.....	25
3.11. Setup Configuration.....	26
3.12. Operating Condition of EUT	26
3.13. Description of Test Facility	27
3.14. Measurement Uncertainty	28
4. MEASUREMENT EQUIPMENTLIST.....	29
4.1. Conducted Emission Measurement	29
4.2. Radiated Emission Measurement	29
4.3. RF Conducted Measurement	30
4.4. Contention Based Protocol Measurement	30
5. CONDUCTED EMISSION.....	31
5.1. Block Diagram of Test Setup	31
5.2. Conducted Emission Limit	31
5.3. Test Procedure	31
5.4. Test Results	31
6. RADIATED EMISSION	32
6.1. Block Diagram of Test Setup	32
6.2. Radiated Emission Limits.....	34
6.3. Test Procedure	35
6.4. Measurement Result Explanation.....	37
6.5. Test Results	37
7. MAXIMUM CONDUCTED OUTPUT POWER	38
7.1. Block Diagram of Test Setup	38
7.2. Specification Limits.....	38
7.3. Test Procedure	39
7.4. Test Results	39
8. CONTENTION BASED PROTOCOL	40
8.1. Block Diagram of Test Setup	40
8.2. Specification Limits.....	40
8.3. Test Procedure	42
8.4. Test Results	42



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9. DEVIATION TO TEST SPECIFICATIONS 43

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT (Permissive Change)

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory : LG Electronics Nanjing New Technology Co., Ltd.
EUT Description
(1) Product : Notebook Computer
(2) Model : (1)16Z90R (2)16ZB90R (3)16ZD90R (4)16ZG90R
(3) Brand : LG
(4) Power Supply: DC 20V, 3.25A

Applicable Standards:

Title 47 FCC CFR Part 15 Subpart E

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2023. 07. 20

Reviewed by:



(Annie Yu/Administrator)

Approved by:



(Johnny Hsueh/Section Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2023. 07. 20	Original Report	EM-F230368

2. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Description	Results
15.207	Conducted Emission	PASS
15.205/15.209 15.407 (b)(6)	Radiated Band Edge and Radiated Spurious Emission	PASS
15.407(a)(8)	Maximum Power Spectral Density	N/A ^{Note3}
15.407(a)(8)	Maximum Conducted Output Power	PASS ^{Note4}
2.1049 15.407(a)(10)	Emission/Occupied Bandwidth	N/A ^{Note3}
15.407(b)(6)	Undesirable emission limits: Spurious Emission (Conducted)	N/A ^{Note3}
15.407(b)(7)	In-Band Emission (Channel Mask)	N/A ^{Note3}
15.407(d)(6)	Contention Based Protocol	PASS
15.203	Antenna Requirement	PASS
Note: 1. Decision rule according to the limit of the test standard chapter, the test value is lower than the limit specified in the test chapter, and it is judged as Pass. 2. The uncertainties value is not used in determining the result. 3. Due to add components can't influence on RF circuit, so it is unnecessary to re-test. 4. Due to add Touch Board for Panel and new Antenna. We did spot check for output power and all output power values keep identical original grant power.		

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Product	Notebook Computer
Model	(1)16Z90R (2)16ZB90R (3)16ZD90R (4)16ZG90R The difference between all models is different in the sales customers and color difference.
Configuration (HVIN)	16Z90R-K, 16Z90R-N, 16Z90R-A, 16Z90R-R, 16Z90R-Q, 16Z90R-H and 16Z90R-T.
Brand	LG

The model 16Z90R has following different configuration and components, and the details are as follows:

Difference Configuration (HVIN)		Main Board	GPU	Battery	CPU	TPM (Trusted Platform Module)	Panel Touch Function	Antenna
Original	16Z90R-K	ROYAL MAIN B/D	Intel Iris Xe Graphics	LBV7227E (80 Wh)	Intel, i7-1360P Intel, i5-1340P	Not Support	Without	#1 WA-P-LELE-04-009 #2 L1LRF008-CS-H
	16Z90R-N					Support		
	16Z90R-A	ROYAL NVIDIA	NVIDIA GeForce RTX 3050	LBY122CM (90 Wh)		Not Support		
	16Z90R-R	MAIN B/D				Support		
This Time	16Z90R-Q	ROYAL MAIN B/D	Intel Iris Xe Graphics	LBV7227E (80 Wh)	Intel, i7-1370P Intel, i5-1350P	Support	With	#3 WA-P-LBLB-04-110
	16Z90R-H	ROYAL MAIN B/D	Intel Iris Xe Graphics	LBV7227E (80 Wh)	Intel, i7-1360P Intel, i5-1340P	Not Support		
	16Z90R-T					Support		

3.2. Description of EUT

Test Model	16Z90R								
Serial Number	N/A								
Power Rating	DC 20V, 3.25A								
Software Version	XY (X, Y can be 0 to 9 for different SW version not influence RF parameter)								
RF Features	WLAN:802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.1)								
Transmit Type	2.4 GHz								
	802.11b	1T1R							
	802.11g	1T1R							
	802.11n-HT20	2T2R							
	802.11n-HT40	2T2R							
	802.11ax-HE20	2T2R							
	802.11ax-HE40	2T2R							
	BT/BLE	1T1R							
	U-NII Bands								
	802.11a	1T1R							
	802.11n-HT20/802.11ac-VHT20/802.11ax-HE20	2T2R							
	802.11n-HT40/802.11ac-VHT40/802.11ax-HE40	2T2R							
	802.11ac-VHT80/802.11ax-HE80	2T2R							
	802.11ac-VHT160/802.11ax-HE160	2T2R							
	The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).								
Device Category	☐ Outdoor Access Point ☐ Fixed point-to-point Access Point ☐ Indoor Access Point ☒ Mobile and Portable client device								
Test Sample	<table><tr><th>Sample No.</th><th>Test Item</th><th>Firmware</th></tr><tr><td>02</td><td>AC Conduction, RSE, Output Power, CBP</td><td>N/A</td></tr></table>			Sample No.	Test Item	Firmware	02	AC Conduction, RSE, Output Power, CBP	N/A
Sample No.	Test Item	Firmware							
02	AC Conduction, RSE, Output Power, CBP	N/A							
Sample Status	Trial sample								
Date of Receipt	2023. 06. 29								
Date of Test	2023. 07. 05 ~ 19								

Interface Ports of EUT	• One HDMI Port • Two USB Type C Ports • One Earphone Port • One Micro SD Card Slot • Two USB 3.0 Ports
Accessories Supplied	• AC Adapter • USB C Cable • LAN Gender

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.

3.3. Reference Test Guidance

ANSI C63.10:2013

KDB 789033 D02 v02r01, KDB 662911 D01 v02r01, KDB 987594 D02 v01r01

3.4. Information for Permissive Change

- The EUT is an addition version with original FCC ID: BEJNT-16Z90R and IC: 2703H-16Z90R are as following.
 - To add new Configuration (HVIN) 16Z90R-Q, 16Z90R-H and 16Z90R-T for FCC ID application.
 - To add new Configuration (HVIN) 16Z90R-H and 16Z90R-T for ISSED application.
 - To add Touch Board for Panel for new Configuration (HVIN) 16Z90R-H and 16Z90R-T.
 - To add new Antenna for Main Board (GM).
 - To decrease power for WIFI 2.4GHz Only. Other BT/BLE/UNII/6XD power is not change.
- The differences between this application and original's ID as clarify in following list.

Configuration (HVIN) \ Difference		Antenna	CPU	LCD Panel (Include Touch Board)
Original	16Z90R-K 16Z90R-N 16Z90R-A 16Z90R-R	#1 WA-P-LELE-04-009 #2 L1LRF008-CS-H	Intel, i7-1360P Intel, i5-1340P	Without
	16Z90R-Q		Intel, i7-1370P Intel, i5-1350P	
Permissive Change	16Z90R-H, 16Z90R-T	#3 WA-P-LBLB-04-110	Intel, i7-1360P Intel, i5-1340P	With

- Due to above different item, there have some test item should be re-tested (see section 2), the test data are recorded in this report.

3.5. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Gain(dBi)	
					Main	AUX
1.	WA-P-LBLB-04-110	INPAQ	Mono-Pole	2400-2500	3.1	2.9
				5150-5350	-2.1	2.8
				5470-5725	2.5	5.7
				5725-5850	5.2	5.3
				5925-6425	4.8	3.7
				6425-6525	1.0	-1.0
				6525-6875	1.6	2.8
				6875-7125	2.9	-1.4
According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then						
Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi						
Note : WLAN 2.4GHz: Directional gain =						
5925-6425MHz: Directional gain = $10 \log[(10^{3.7/10} + 10^{4.8/10})/2]$ = 4.28dBi						
6425-6525MHz: Directional gain = $10 \log[(10^{-1.0/10} + 10^{1.0/10})/2]$ = 0.11dBi						
6525-6875MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{1.6/10})/2]$ = 2.24dBi						
6875-7125MHz: Directional gain = $10 \log[(10^{-1.4/10} + 10^{2.9/10})/2]$ = 1.26dBi						
We chose the antenna gain corresponding to the frequency listed on the table which is closer to center frequency of WLAN.						

3.6. EUT Specifications Assessed in Current Report

Mode	U-NII Band	Fundamental Range (MHz)	Channel Number
802.11ax-HE20	5	5955-6415	24
	6	6435-6515	5
	7	6535-6855	17
	8	6875-7115	13
802.11ax-HE40	5	5965-6405	12
	6	6445-6485	2
	7	6525-6845	9
	8	6885-7085	6
802.11ax-HE80	5	5985-6385	6
	6	6465-6545	2
	7	6625-6785	3
	8	6865-7025	3
802.11ax-HE160	5	6025-6345	3
	6	6505	1
	7	6665-6825	2
	8	6985	1

Mode	Modulation	Data Rate (Mbps)
802.11ax-HE20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM)	Up to 287
802.11ax-HE40		Up to 574
802.11ax-HE80		Up to 1201
802.11ax-HE160		Up to 2402

Channel List								
802.11ax-HE20								
U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)
5	2	5955	5	81	6335	7	161	6755
	5	5975		85	6375		165	6775
	9	5995		89	6395		169	6795
	13	6015		93	6415		173	6815
	17	6035	6	97	6435	8	177	6835
	21	6055		101	6455		181	6855
	25	6075		105	6475		185	6875
	29	6095		109	6495		189	6895
	33	6115		113	6515		193	6915
	37	6135	7	117	6535		197	6935
	41	6155		121	6555		201	6955
	45	6175		125	6575		205	6975
	49	6195		129	6595		209	6995
	53	6215		133	6615		213	7015
	57	6235		137	6635		217	7035
	61	6255		141	6655		221	7055
	65	6275		145	6675		225	7075
	69	6295		149	6695		229	7095
	73	6315		153	6715		233	7115
	77	6335		157	6735			

Channel List								
802.11ax-HE40								
U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)
5	3	5965	5	83	6365	7	163	6765
	11	6005		91	6405		171	6805
	19	6045	6	99	6445		179	6845
	27	6085		107	6485	8	187	6885
	35	6125	7	115	6525		195	6925
	43	6165		123	6565		203	6965
	51	6205		131	6505		211	7005
	59	6245		139	6645		219	7045
	67	6285		147	6685		227	7085
	75	6325		155	6725			

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Channel List								
802.11ax-HE80								
U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)
5	7	5985	5	87	6385	7	167	6785
	23	6065	6	103	6465	8	183	6865
	39	6145		119	6545		199	6945
	55	6225	7	135	6625		215	7025
	71	6305		151	6705			

Channel List					
802.11ax-HE160					
U-NII Band	Channel Number	Frequency (MHz)	U-NII Band	Channel Number	Frequency (MHz)
5	15	6025	7	143	6665
	47	6185	8	175	6825
	79	6345		207	6985
6	111	6505			

Note: Test modes are presented at section 3.7.

3.7. Description of Key Components

3.7.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Win 10	---
		Win 10 Pro	
		Win11 Home	
Main Board	LG	ROYAL MAIN B/D	GM Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
	LG	ROYAL NVIDIA MAIN B/D	PM Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
WLAN SUB Board	LG	16Z90R SUB B/D	Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 JiangSuHuaShen Electronic co.,ltd (HXF) #3 Elec&Eltek Company (MCO) Limited.
CPU (Socket: BGA1744)	Intel	i7-1360P	2.2GHz
	Intel	i5-1340P	1.9GHz
	Intel	i7-1370P	1.9GHz
	Intel	i5-1350P	1.9GHz
16" LCD Panel	LG Display	LP160WQ1	Resolution: 2560 x 1600, 60Hz WQXGA IPS With Touch* Without Touch
	LG Display	LP160WQ2	Resolution: 2560 x 1600, 144Hz WQXGA IPS
Storage (SSD)	SK hynix	---	256GB
		---	512GB
		---	1TB
		---	2TB
	Samsung	---	256GB
		---	256GB
		---	512GB
		---	1TB
Memory (RAM)	Samsung	---	16GB LPDDR5x(On Board)
		---	8GB LPDDR5x(On Board)
		---	32GB LPDDR5x(On Board)
	SK Hynix	---	16GB LPDDR5x(On Board)
		---	8GB LPDDR5x(On Board)
		---	32GB LPDDR5x(On Board)
Battery Pack	LG	LBY122CM	90Wh with PM M/B, DC 7.76V,90Wh
	LG	LBV7227E	80Wh with GM M/B DC 7.74V,80Wh
WLAN Combo Card	Intel	AX211D2W	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card FCC ID: PD9AX211D2 IC: 1000M-AX211D2

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Item	Supplier	Model / Type	Character
WLAN Combo Antenna	LG (INPAQ)	WA-P-LELE-04-009	PCB, Mono-pole Type Main: Black, Aux: Gray
	LG (INPAQ)	WA-P-LBLB-04-110*	PCB, Mono-pole Type Main: Black, Aux: Gray
	LG (Luxshare)	L1LRF008-CS-H	PCB, Mono-pole Type Main: Black, Aux: Gray
Keyboard	TIC	KT0120B8	---
	LITE-ON	SN8B01	---
Touch Pad	LITE-ON	SP8001(SG-A0630-00A)	---
	ELAN	SD081A-36H0	---
Web Camera	Chicony	CKFLF26	---
	Luxvisions	1BF225N3	---
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet
		80-5946-101	(Black) 10/100 Megabit Ethernet
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100 Megabit Ethernet
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet
	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	370-50713	(White) 10/100 Megabit Ethernet
		370-50714	(Black) 10/100 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
AC Adapter	LG (PI ELECTRONICS)	LP65WFC20P-NJ W	I/P: AC 100-240V, 1.6A, 50-60Hz O/P:DC 5V,3A(15W) or DC 9V, 3A(27W)or DC 15V,3A (45W) or DC 20V,3.25A (65W) (US Type, Wall-mount)
	LG (PI ELECTRONICS)	LP65WFC20P-NJ B	I/P: AC 100-240V, 1.6A, 50-60Hz O/P:DC 5V,3A(15W) or DC 9V, 3A(27W)or DC 15V,3A (45W) or DC 20V,3.25A (65W) (US Type, Wall-mount)
	Type C Cable, Shielded, Undetached, 2.0m		
Note: “*” Standing for adding new configuration.			

Remark: For more detailed features description, please refer to the manufacturer’s specifications or the user manual.

3.7.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

SKU (Mode) 1		
Main Board		LG, ROYAL MAIN B/D (GM)
SUB Board		LG, 16Z90R SUB B/D
CPU		Intel, i5-1340P
16" LCD Panel		LG Display, LP160WQ1 with Touch
Storage (SSD)		SK hynix, 2TB
		Samsung, 256GB
Memory (RAM)		Samsung, 32GB
Battery Pack		LG, 90Wh
Keyboard		TIC, KT0120B8
Touch Pad		LITE-ON, SP8001(SG-A0630-00A)
Web Camera		Chicony, CKFLF26
WLAN Combo Card		Intel, AX211D2W
WLAN Combo Antenna		LG (INPAQ), WA-P-LBLB-04-110
HDMI		2560 x 1600, 144Hz
Type C #1	AC Adapter	LG (PI ELECTRONICS), LP65WFC20P-NJ W
Type C #2	Link to LAN Gender	MEC (White)


3.8. Test Configuration

Mode	TX _{on} (ms)	1/ TX _{on} (kHz)	TX _{on+off} (ms)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
802.11ax-HE20	2.600	0.385	2.650	0.981	N/A
802.11ax-HE40	2.600	0.385	2.650	0.981	N/A
802.11ax-HE80	2.600	0.385	2.640	0.985	N/A
802.11ax-HE160	2.290	0.437	2.330	0.983	N/A
26T	0.760	1.316	0.810	0.938	0.278
52T	1.450	0.690	1.500	0.967	0.146
106T	3.040	0.329	3.080	0.987	N/A
242T	1.410	0.709	1.460	0.966	0.150
484T	2.780	0.360	2.830	0.982	N/A
996T	1.330	0.752	1.380	0.964	0.159

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

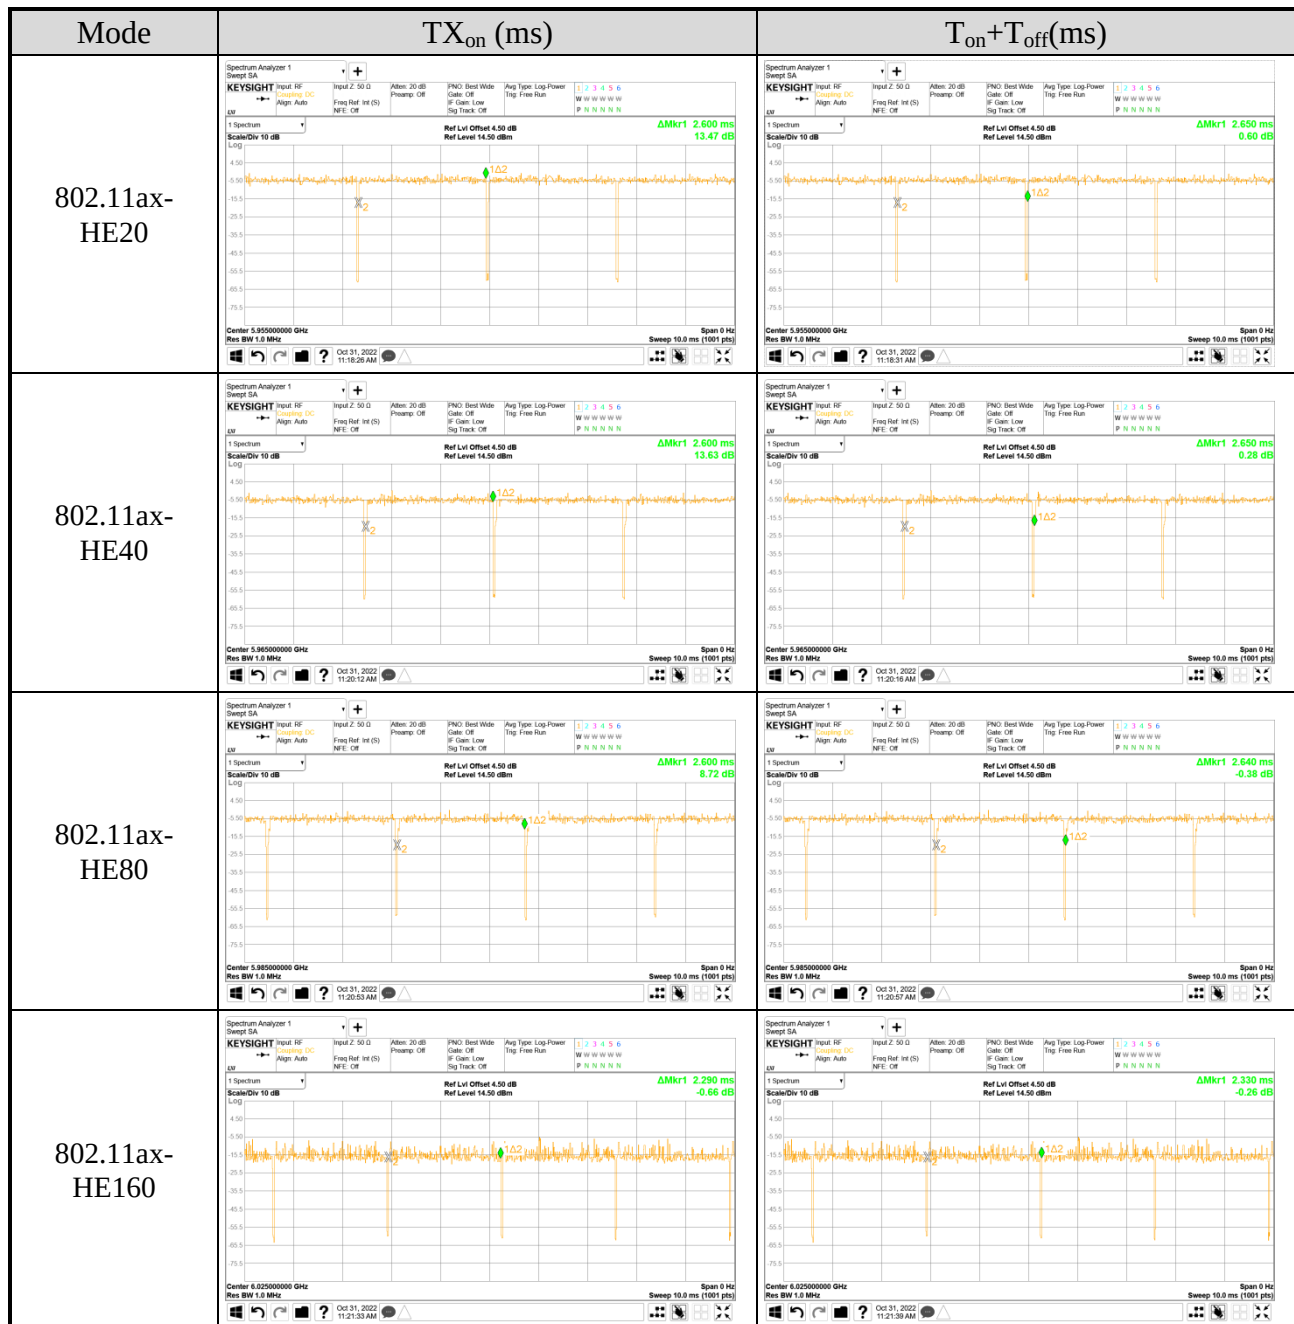

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

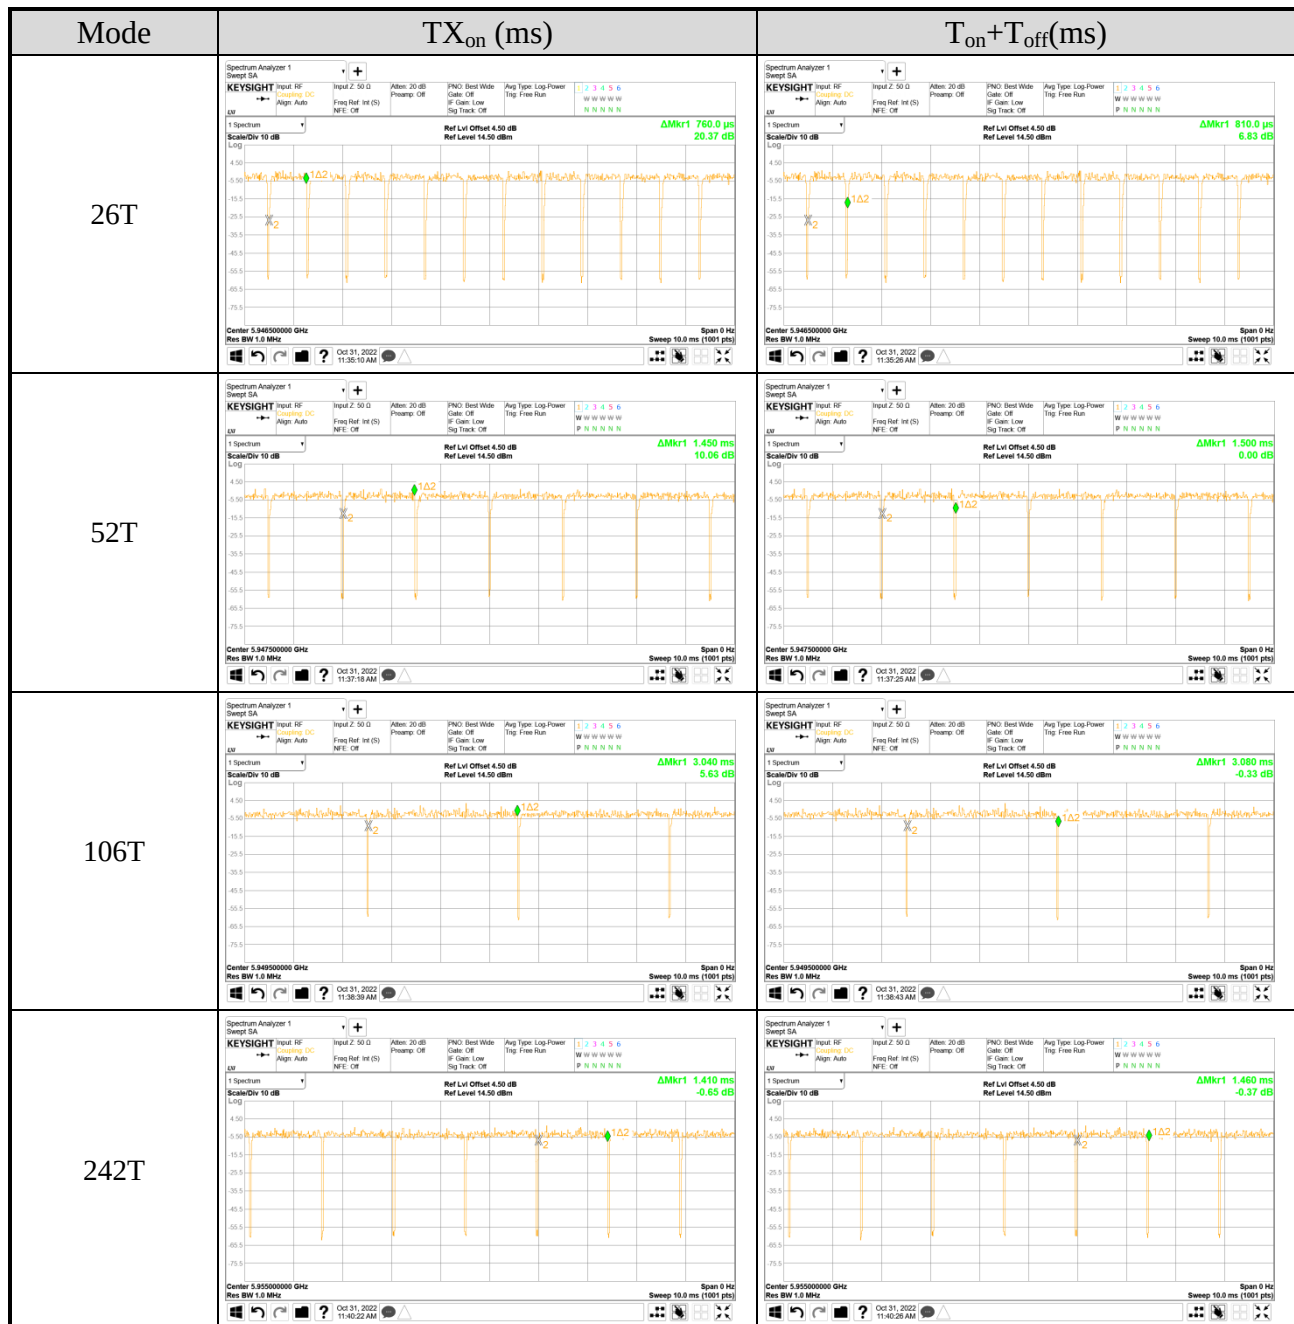

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



AC Conduction				
Normal operation				

Item	Mode	Data Rate	Test Channel
Radiated Test Case Radiated Spurious Emission (30MHz~1GHz)	802.11ax-HE160	HE0	79

● OFDM Modulation

Item	Mode	Data Rate	Test Channel
Radiated Test Case Radiated Spurious Emission (Above 1GHz) (SPOT CHECK For U-NII Band 6 ~ 8 Original Report Worse Mode)	802.11ax-HE20	HE0	9
	802.11ax-HE40	HE0	3/227
	802.11ax-HE80	HE0	87
	802.11ax-HE160	HE0	79
	Band Edge	802.11ax-HE20	2
		802.11ax-HE40	3/227
		802.11ax-HE80	7/215
		802.11ax-HE160	15/207
	Band Edge-Marker Delta	802.11ax-HE20	233

Item	Mode	Data Rate	Test Channel
Conducted Test Case Maximum Conducted Output power (SPOT Check)	802.11ax-HE20	HE0	2/45/93/97/105/113/117/149/181/185/209/233
	802.11ax-HE40	HE0	3/43/91/99/107/115/147/179/187/211/227
	802.11ax-HE80	HE0	7/39/87/103/119/135/151/167/183/199/215
	802.11ax-HE160	HE0	15/47/79/111/143/175/207
	Contention Based Protocol	802.11ax-HE20	45/105/149/209
		802.11ax-HE160	47/111/143/207

● OFDMA Modulation

Item		Tones	RU Index	Mode	Data Rate	Test Channel
Radiated Test Case	Radiated Spurious Emission (Above 1GHz) ^{Note 4} (Full Test)	26T	18	802.11ax-HE80	HE0	7
		52T	44	802.11ax-HE80	HE0	7
		106T	56	802.11ax-HE80	HE0	7
		242T	62	802.11ax-HE80	HE0	7
		484T	65	802.11ax-HE40	HE0	3
		996T	67	802.11ax-HE160	HE0	79
	Band Edge ^{Note 5}	26T	0	802.11ax-HE20	HE0	2
		52T	37	802.11ax-HE20	HE0	2
			44	802.11ax-HE40	HE0	227
		106T	53	802.11ax-HE20	HE0	2
			56	802.11ax-HE40	HE0	227
		242T	61	802.11ax-HE20	HE0	2
			62	802.11ax-HE40	HE0	227
			61	802.11ax-HE80	HE0	7
		484T	65	802.11ax-HE40	HE0	3
			65	802.11ax-HE40	HE0	227
		996T	67	802.11ax-HE80	HE0	7
			67	802.11ax-HE80	HE0	215
			67	802.11ax-HE160	HE0	15
	Band Edge- Marker Delta	26T	8	802.11ax-HE20	HE0	233
		52T	40	802.11ax-HE20	HE0	233
		106T	54	802.11ax-HE20	HE0	233
		242T	61	802.11ax-HE20	HE0	233

Item		Tones	RU Index	Mode	Data Rate	Test Channel
Conducted Test Case	Maximum Conducted Output power (SPOT Check)	26T	0/4/8	802.11ax-HE20	HE0	2/45/93/97/ 105/113/117/ 149/181/185/ 209/233
		52T	37/39/40			
		106T	53/54			
		242T	61			
		26T	0/8/17	802.11ax-HE40	HE0	3/43/91/99/10 7/115/147/179 /187/211/227
		52T	37/40/44			
		106T	53/54/56			
		242T	61/62			
		484T	65	802.11ax-HE80	HE0	7/39/87/103/1 19/135/151/16 7/183/199/215
		26T	0/18/36			
		52T	37/44/52			
		106T	53/56/60			
		242T	61/62/64			
		484T	65/66			
		996T	67	802.11ax-HE160	HE0	15/47/79/111/ 143/175/207
		26T	0/18/36 S0/S18/S36			
		52T	37/44/52 S37/S44/S52			
		106T	53/56/60 S53/S56/S60			
		242T	61/62/64 S61/S62/S64			
		484T	65/66 S65/S66			
		996T	65/S67			

Note 1: ☐ Mobile Device ☒ Portable Device

and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

☒ Lie ☐ Side ☐ Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

Note 3: The data rates were selected based on preliminary testing that identified rate as the worst case for output power.

Note 4: After preliminary test, we present worst case with maximum power of each RU type.

Note 5: We present worst case (max. power, closest band-edge channel or both) in the report.

3.9. Output Power Setting

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE20	5	5955	1.000	1.000	802.11ax-HE20	7	6535	0.750	0.750
		6175	1.000	1.000			6695	0.750	0.750
		6415	1.000	1.000			6855	0.750	0.750
	6	6435	1.500	1.500		8	6875	0.750	0.750
		6475	1.500	1.500			6995	0.750	0.750
		6515	1.500	1.500			7115	-3.000	-3.000

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE40	5	5965	4.250	4.250	802.11ax-HE0	7	6525	4.750	4.750
		6165	4.250	4.250			6685	4.000	4.000
		6405	4.250	4.250			6845	4.000	4.000
	6	6445	4.750	4.750		8	6885	4.000	4.000
		6485	4.750	4.750			7005	4.000	4.000
							7085	4.500	4.500

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE80	5	5985	6.375	6.375	802.11ax-HE80	7	6625	6.500	6.500
		6145	6.750	6.750			6705	6.500	6.500
		6385	6.750	6.750			6785	6.500	6.500
	6	6465	7.250	7.250		8	6865	6.500	6.500
		6545	7.250	7.250			6945	6.500	6.500
							7025	6.500	6.500

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE160	5	6025	9.250	9.250	802.11ax-HE160	7	6665	9.250	9.250
		6185	9.375	9.375			6825	9.250	9.250
		6345	9.500	9.500		8	6985	9.250	9.250
	6	6505	10.000	10.000					

3.10. Tested Supporting System List

3.10.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	DELL	P2418D	CN-0P7KK0-TV2 00-8BJ-021T	N/A
2.	USB Mouse	hp	MOFYUO	FCMHH0AKZB D7LC	N/A
3.	Earphone	APPLE	N/A	N/A	N/A
4.	SD Card	ADATA	MicroSDHC Card	N/A	N/A
5.	USB Storage	SanDisk	SDCZ48-032G	N/A	N/A
Partner System					
6	AP Server	ASUS	RT-AX88U	N/A	FCC ID: MSQ-RTAXHP00 IC: 3568A-RTAXHP00

3.10.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8 AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8
3.	Earphone Cable: Unshielded, Undetachable, 1.2m
4.	N/A
5.	USB Cable: Unshielded, Undetachable, 1.8
6.	AC adapter: M/N:WA-30B12, Cable: Unshielded, Detachable, 1.2m LAN cable: Unshielded, Detachable, 3.0m
7.	LAN cable: Unshielded, Detachable, 1.8m

3.11. Setup Configuration

3.11.1. EUT Configuration for Power Line & Radiated Emission

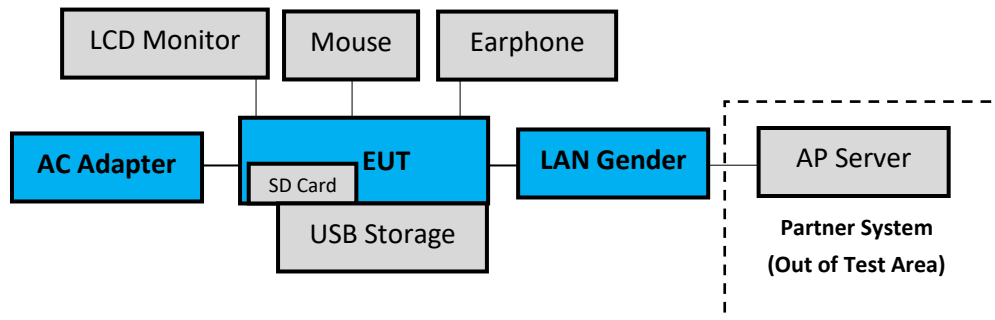

3.11.2. EUT Configuration for RF Conducted Test Items



3.12. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

[ANT AUX port (A Button in DRTU), ANT Main port (B Button in DRTU)].

3.13. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.14.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities			Frequency Range	Uncertainty
Conduction Test	☐	No. 7 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
	☒	No. 8 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.5dB
Radiation Test	☒	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.6dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.4dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.5dB
	☐	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.0dB
			200MHz-1000MHz, 3m, Horizontal	±4.4dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.5dB
	☐	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.3dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
			1GHz-6GHz, 3m	±4.6dB
			6GHz-18GHz, 3m	±4.4dB
	☐	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.6dB
			200MHz-1000MHz, 3m, Horizontal	±4.4dB
			30MHz-200MHz, 3m, Vertical	±4.5dB
			200MHz-1000MHz, 3m, Vertical	±4.9dB
			1GHz-6GHz, 3m	±4.9dB
			6GHz-18GHz, 3m	±4.6dB
	Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m	±3.4dB

Remark : Uncertainty = $ku_c(y)$

Test Items	Uncertainty
Maximum Conducted Output Power	± 0.72dB
Contention Based Protocol	± 2%

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2023. 01. 11	1 Year
2.	A.M.N.	R&S	ENV432	101567	2023. 06. 02	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2022. 12. 19	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2022. 12. 14	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2023. 04. 13	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2022. 09. 07	1 Year
7.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010B-526	MY57410128	2022.12.21	1 Year
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2023.03.29	1 Year
3.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2022.08.24	1 Year
4.	Test Receiver	R&S	ESCS30	100338	2023.06.20	1 Year
5.	Amplifier	HP	8447D	2944A06305	2022.12.29	1 Year
6.	Microwave Amplifier	Keysight	83051A	MY56480113	2022.09.07	1 Year
7.	Microwave Amplifier	HP	8449B	3008A01284	2023.06.06	1 Year
8.	Loop Antenna	TESEQ	HLA 6121	60478	2023.02.21	1 Year
9.	Bilog Antenna	TESEQ	CBL6112D	33821	2023.06.30	1 Year
10.	Horn Antenna	EMCO	3115	9112-3775	2023.05.04	1 Year
11.	Horn Antenna	COM-POWER	AH-840	101092	2022.12.30	1 Year
12.	Notch Filter	Warison	WFIL-N5925-6 425F	WR61CFWC4B1	2023.01.13	1 Year
13.	Notch Filter	Warison	WFIL-N6425-6 525F	WR61CFWC6B1	2023.01.13	1 Year
14.	Notch Filter	Warison	WFIL-N6525-6 875F	WR61CFWC8B1	2023.01.13	1 Year
15.	Notch Filter	Warison	WFIL-N6875-7 125F	WR61CFWC2B1	2023.01.13	1 Year
16.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2023.01.07	1 Year
17.	Coaxial Cable	HUBER+SUHN ER	SUCOFLEX 106	RE-14	2023.01.07	1 Year
18.	Coaxial Cable	HUBER+SUHN ER	SUCOFLEX 102	RE-30	2022.08.22	1 Year
19.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2023.04.13	1 Year
20.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2023. 02. 22	1 Year
2.	Power Meter	Anritsu	ML2495A	2127005	2022. 12. 01	1 Year
3.	Power Meter	Anritsu	ML2495A	2127004	2022. 12. 07	1 Year
4.	Power Sensor	Anritsu	MA2411B	1911360	2022. 12. 07	1 Year
5.	Power Sensor	Anritsu	MA2411B	1911356	2022. 12. 01	1 Year
6.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2023. 04. 13	1 Year

4.4. Contention Based Protocol Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9030B	MY61330403	2022. 12. 16	1 Year
2.	Spectrum Analyzer	Keysight	N9010B	MY59071380	2023. 03. 02	1 Year
3.	MXG RF Vector Signal Generator	Agilent	N5182B	MY53050409	2022. 11.14	1 Year
4.	Frequency Extender	KEYSIGHT	N5182BX07	MY59362533	2022. 11.14	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2023. 04. 13	1 Year
6.	Power Splitter	minicircuit	ZFRSC-183-S ⁺	SF688901703	2023. 03. 30	1 Year
7.	Power Divider	EMEC	EM-MPD-0.5/8-2SS	22072002-17	2023. 03. 30	1 Year
8.	Attenuator (10dB) X2	Worken	WK0602-10	0120A02208001 S	N.C.R	N.C.R
9.	Attenuator (30dB) X1	Worken	WK0602-30	0120A02208002 S	N.C.R	N.C.R
10.	CBP Test Unit	KEYSIGHT	N/A	N/A	N.C.R.	N.C.R.


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.11

5.1.2. Shielded Room Setup Diagram

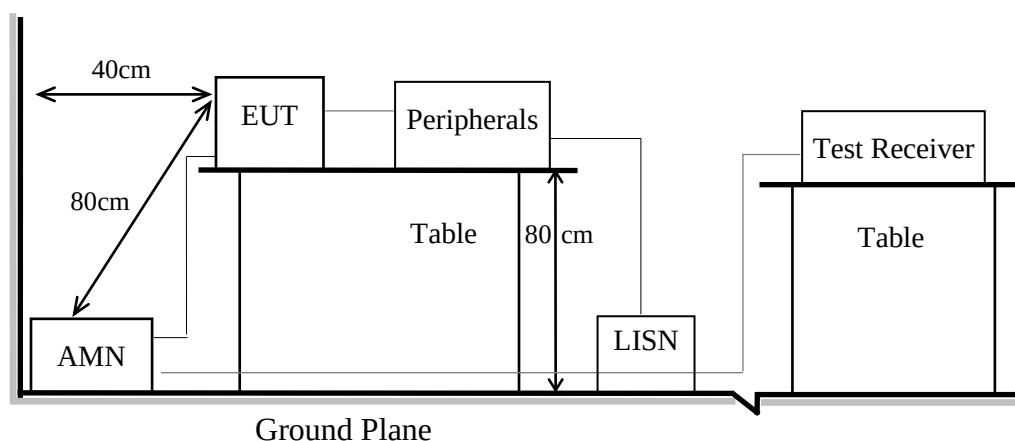

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.11


6.1.2. Setup Diagram for 9kHz-30MHz

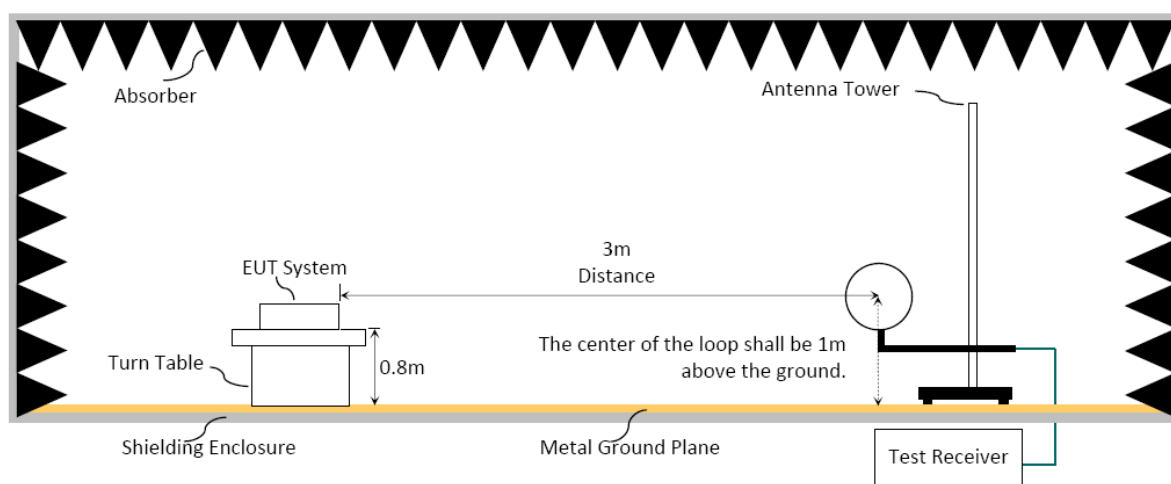

6.1.3. Setup Diagram for 30-1000MHz

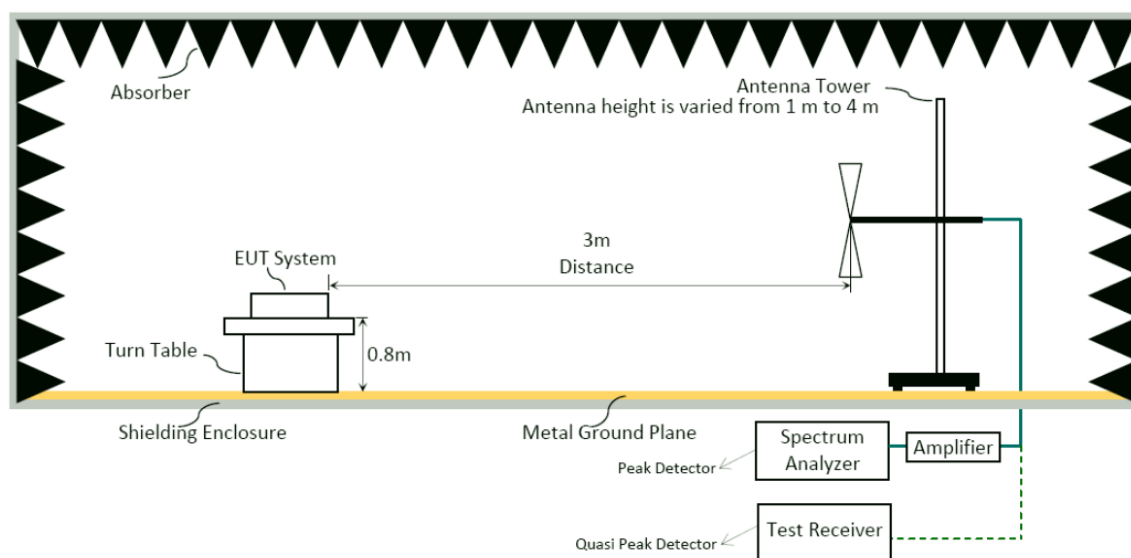

6.1.4. Setup Diagram for above 1GHz

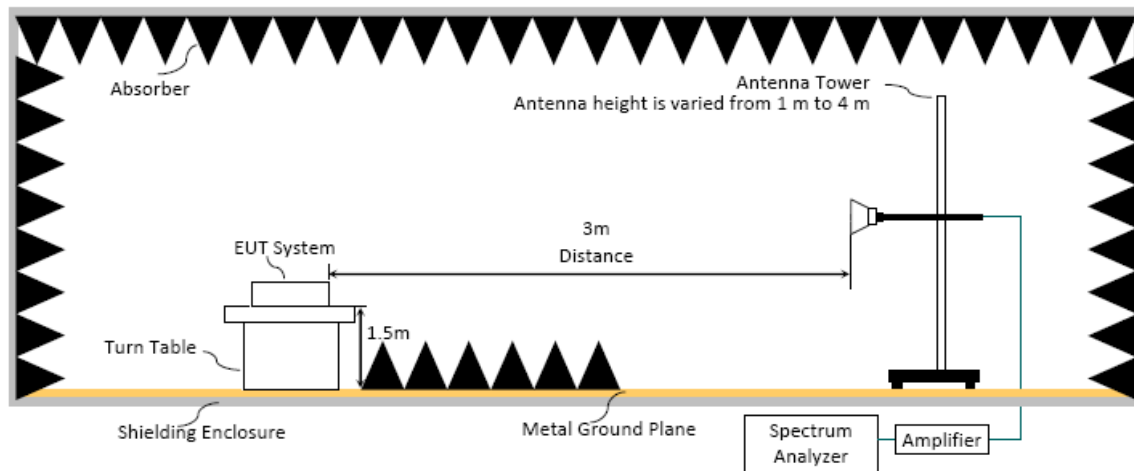

6.2. Radiated Emission Limits

Radiated emissions fall in restricted bands, as defined in FCC Section 15.205/RSS-Gen Section 8.10 table 7 must be in compliance with the radiated emission limits specified in FCC Section 15.209/RSS-Gen Section 8.9 table 6 as below.

6.2.1. General Limit

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

(2) The tighter limit applies to the edge between two frequency bands.

(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(4) Fundamental and emission fall within operation band are exempted from this section.

(5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.2.2. Limit for non-restricted frequency above 1 GHz

Frequency Band (MHz)	E.I.R.P. Limit	Field Strength Limit at 3 m
Out of 5925 to 7125	-27 dBm/MHz	68.2 dB μ V/m

Note: Field Strength at 3 m= E.I.R.P. + 95.2 dB

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

6.3.1. Radiated measurement Spectrum Analyzer Setting

6.3.1.1 Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120kHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

6.3.1.2 Frequency above 1GHz to 10th harmonic (up to 40 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:☒ **Option 1:**

(1) RBW = 1MHz

(2) $VBW \geq 1/T$. (Duty Cycle < 98%, when duty cycle presented in section 3.7)

Mode	VBW Setting
26T	1.5kHz
52T	750Hz
242T	750Hz
996T	820Hz

(3) $VBW = \text{set } VBW \leq RBW / 100$, but not less than 10Hz (Duty Cycle $\geq 98\%$, when duty cycle presented in section 3.7)

Mode	VBW Setting
802.11ax-HE20	10Hz
802.11ax-HE40	10Hz
802.11ax-HE80	10Hz
802.11ax-HE160	10Hz
106T	10Hz
484T	10Hz

(4) Detector = Peak.

(5) Sweep time = auto.

(6) Trace mode = max hold.

(7) Allow sweeps to continue until the trace stabilizes.

☐ **Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

6.3.2. Radiated band edge measurement Spectrum Analyzer Setting

For without 99% OBW edge within 2 MHz of the authorized band edge:

The spectrum analyzer setting, please refer to section 6.3.1.2

For with 99% OBW edge within 2 MHz of the authorized band edge:

Per KDB 789033 Section G.3.d and ANSI C63.10 -2013 6.10.4, SA setting as below:

a. Fundamental field strength of SA setting:

The spectrum analyzer setting, please refer to section 6.3.1.2

b. Delta of SA setting:

- (1) RBW = 1% SPAN but no less than 30 KHz
(In this case, RBW = 500 KHz)
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Correction Factor (Via delta, dB) = Fundamental Emission Level (dB μ V/m) @ RBW 500KHz - Band Edge Emission Level (dB μ V/m) @ RBW 500kHz

Band Edge Emission Level (dB μ V/m) =
Fundamental Emission Level (dB μ V/m) @ RBW 1MHz - Marker Delta (dB)

6.4. Measurement Result Explanation


- Peak Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Meter Reading (dB μ V) (including Preamp factor if test used)
- Average Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Meter Reading (dB μ V) (including Preamp factor if test used)
- ☐ Average Emission Level (dB μ V/m) = Peak Emission Level (dB μ V/m) + DCCF (dB)
Duty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7.
- ☐ ERP = Peak Emission Level (dB μ V/m) - 95.2dB - 2.14dB
- ☐ Band Edge Emission Level (dB μ V/m) = Fundamental Emission Level (dB μ V/m) - Marker-Delta (dB)

6.5. Test Results


Please refer to Appendix A.

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1. Block Diagram of Test Setup

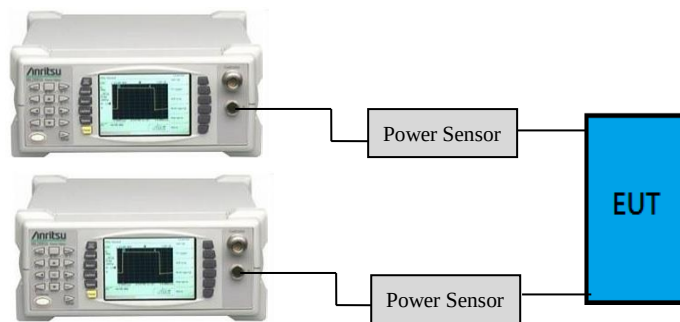

- For 802.11ac-VHT80/160, 802.11ax-HE160 modes only

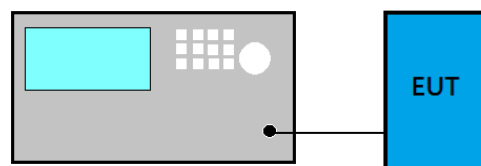

7.2. Specification Limits

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

7.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

■ **Method AVGSA-2 (Spectrum channel power) for 802.11ac-VHT80/160, 802.11ax-HE80/160 modes only**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW) $\geq$ 3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

7.4. Test Results

Please refer to Appendix A

8. CONTENTION BASED PROTOCOL

8.1. Block Diagram of Test Setup

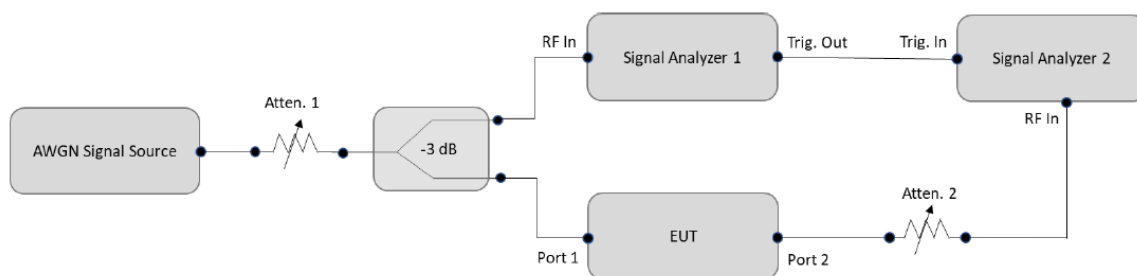

8.2. Specification Limits

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01v01

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	One	Tune incumbent and EUT transmission ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	One	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

Where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

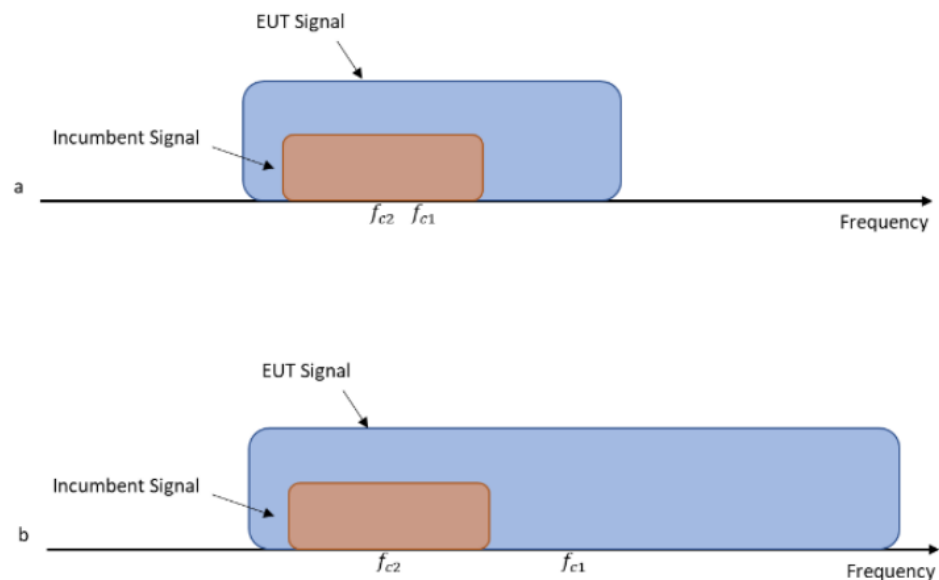


Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it

8.3. Test Procedure

Following measurement procedure is reference to KDB 987594 D02 U-NII 6GHz EMC Measurement v01v01:

- (1) To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the EUT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
- (2) Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- (3) Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- (4) (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- (5) Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center frequency for the AWGN signal and repeat the process.
- (6) The test tool is "LAN test" to let the EUT to transmit with a constant duty cycle.

8.4. Test Results

Please refer to Appendix A

9. DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

TEST DATA AND PLOTS

(Model: 16Z90R)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX B

TEST PHOTOGRAPHS

(Model: 16Z90R)