

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	155
A.2.3 Emissions in Non-restricted Frequency Bands.....	162
A.3 MAXIMUM OUTPUT POWER	163
A.3.1 Average Output Power	163

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2023/07/05	Temp./Hum.	25°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

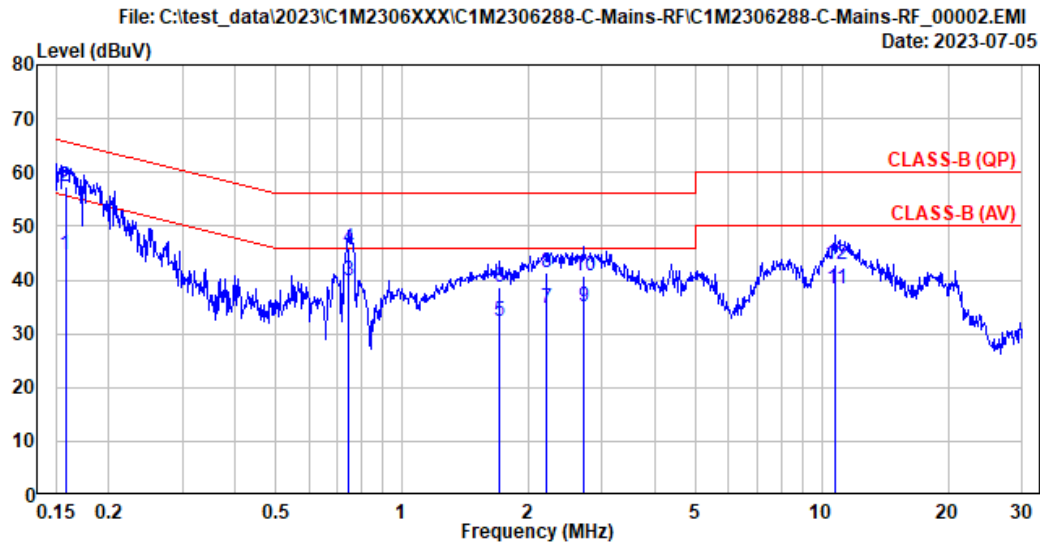

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/60%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90R	Engineer	: Bruce
Test Mode	: operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.158	10.30	0.03	9.85	24.56	44.74	55.59	10.85	Average
2	0.158	10.30	0.03	9.85	37.03	57.21	65.59	8.38	QP
3	0.747	10.29	0.04	9.85	19.80	39.98	46.00	6.02	Average
4	0.747	10.29	0.04	9.85	25.68	45.86	56.00	10.14	QP
5	1.708	10.31	0.05	9.86	12.09	32.31	46.00	13.69	Average
6	1.708	10.31	0.05	9.86	18.53	38.75	56.00	17.25	QP
7	2.202	10.33	0.06	9.86	14.41	34.66	46.00	11.34	Average
8	2.202	10.33	0.06	9.86	21.20	41.45	56.00	14.55	QP
9	2.701	10.34	0.07	9.86	14.88	35.15	46.00	10.85	Average
10	2.701	10.34	0.07	9.86	20.57	40.84	56.00	15.16	QP
11	10.799	10.62	0.14	9.89	17.55	38.20	50.00	11.80	Average
12	10.799	10.62	0.14	9.89	22.28	42.93	60.00	17.07	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2023/07/05	Temp./Hum.	25°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

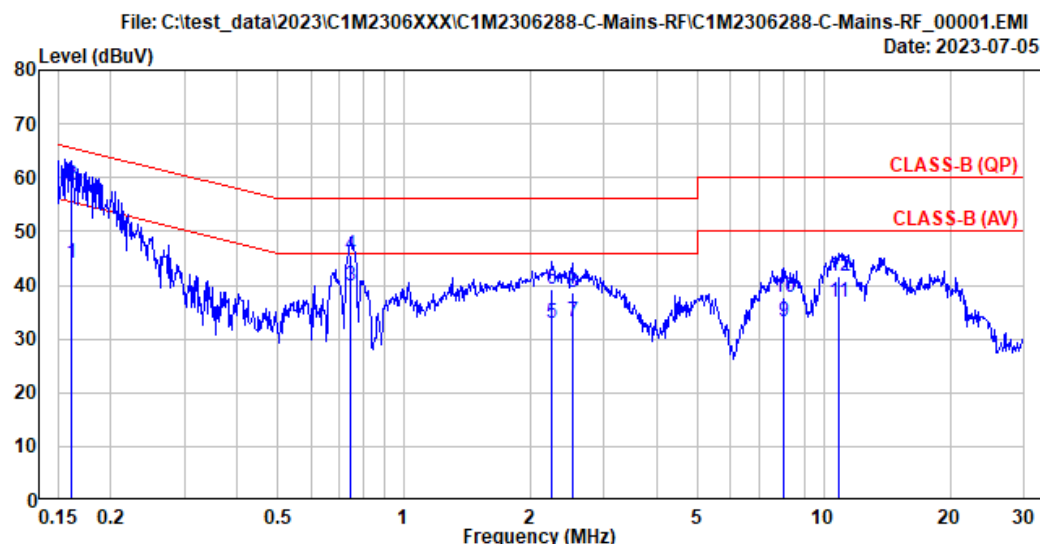

Site No. : No.8 Shielded Room
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B (QP)
Environment : 25°C/60%
EUT Model : 16Z90R
Test Mode : operating

Data No. : 1
Phase : Line
Test Rating : 120Vac/60Hz
Engineer : Bruce

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.161	10.30	0.03	9.85	23.89	44.07	55.42	11.35	Average
2	0.161	10.30	0.03	9.85	38.35	58.53	65.42	6.89	QP
3	0.747	10.28	0.04	9.85	19.73	39.90	46.00	6.10	Average
4	0.747	10.28	0.04	9.85	25.28	45.45	56.00	10.55	QP
5	2.258	10.31	0.06	9.86	12.54	32.77	46.00	13.23	Average
6	2.258	10.31	0.06	9.86	18.87	39.10	56.00	16.90	QP
7	2.519	10.31	0.07	9.86	12.85	33.09	46.00	12.91	Average
8	2.519	10.31	0.07	9.86	18.52	38.76	56.00	17.24	QP
9	8.007	10.43	0.12	9.88	12.80	33.23	50.00	16.77	Average
10	8.007	10.43	0.12	9.88	17.27	37.70	60.00	22.30	QP
11	10.853	10.49	0.14	9.89	16.34	36.86	50.00	13.14	Average
12	10.853	10.49	0.14	9.89	21.16	41.68	60.00	18.32	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2023/07/07 ~ 17	Temp./Hum.	22 ~ 25°C/40 ~ 59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Ryan Chiang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.173	22.19	1.30	26.51	34.60	31.58	40.00	8.42	Peak
84.320	14.05	2.10	26.35	39.46	29.25	40.00	10.75	Peak
134.113	17.66	2.70	26.10	36.86	31.12	43.50	12.38	Peak
736.160	24.94	7.55	27.35	33.35	38.48	46.00	7.52	Peak
925.633	26.32	8.87	26.97	32.39	40.60	46.00	5.40	Peak
987.713	26.98	9.21	26.79	32.39	41.79	54.00	12.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.527	22.38	1.29	26.51	39.49	36.65	40.00	3.35	Peak
83.027	13.77	2.08	26.36	48.38	37.87	40.00	2.13	Peak
134.113	17.66	2.70	26.10	37.12	31.38	43.50	12.12	Peak
169.033	15.95	3.07	25.93	37.82	30.91	43.50	12.59	Peak
664.380	24.62	7.12	27.40	32.97	37.30	46.00	8.70	Peak
989.653	27.00	9.22	26.79	32.41	41.84	54.00	12.16	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

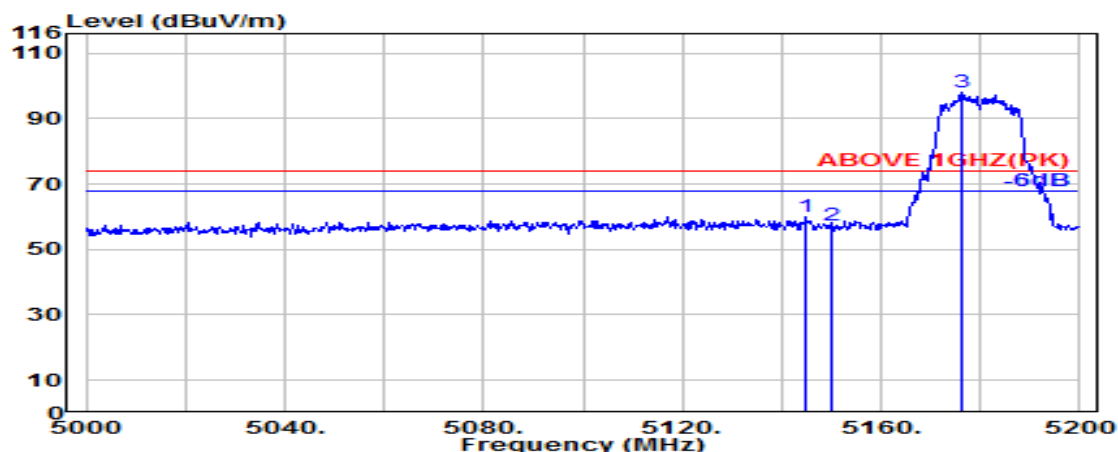

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	33.60	8.54	39.27	57.07	59.94	74.00	14.06	Peak
5150.000	33.60	8.54	39.27	54.65	57.52	74.00	16.48	Peak
@ 5176.000	33.65	8.56	39.27	94.94	97.88	---	---	Peak

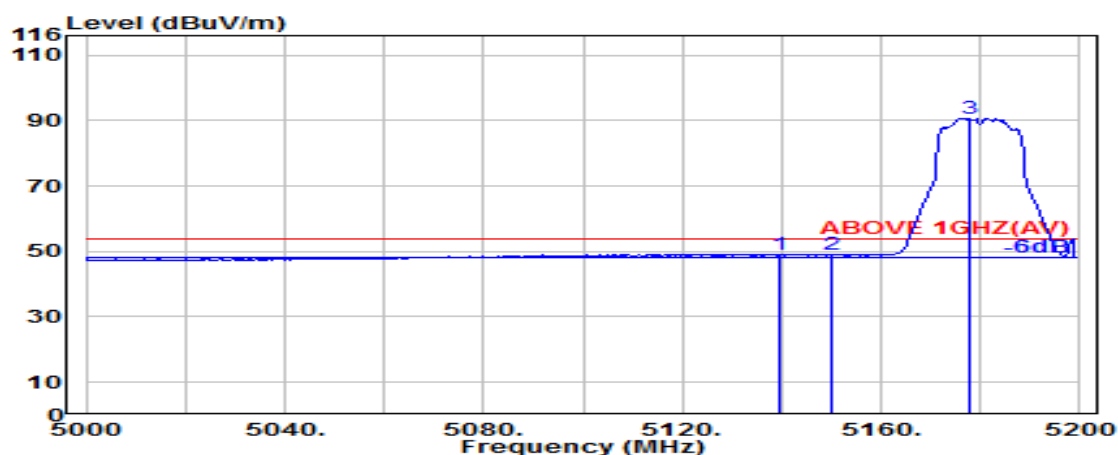

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.400	33.60	8.54	39.27	46.30	49.16	54.00	4.84	Average
5150.000	33.60	8.54	39.27	46.00	48.88	54.00	5.12	Average
@ 5177.800	33.66	8.56	39.27	87.79	90.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

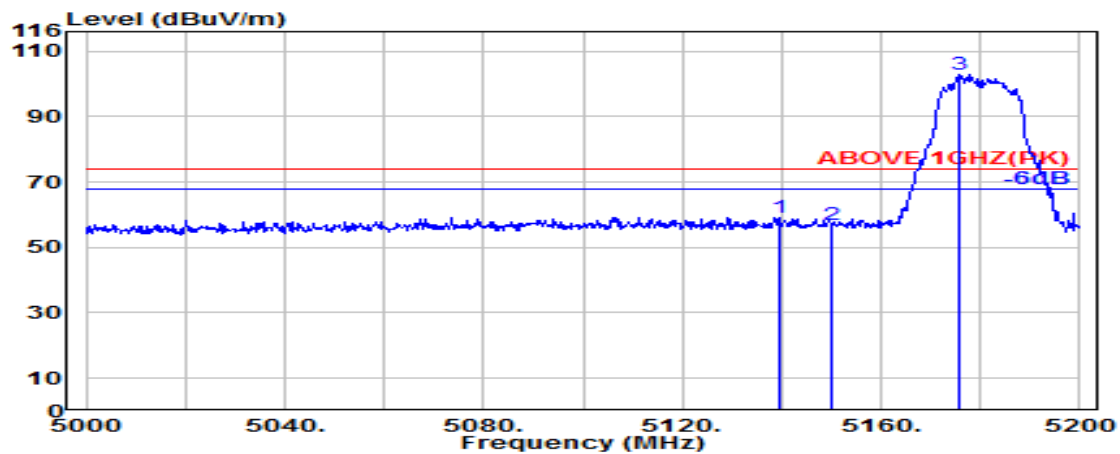

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.600	33.60	8.54	39.27	56.29	59.16	74.00	14.84	Peak
5150.000	33.60	8.54	39.27	53.94	56.81	74.00	17.19	Peak
@ 5175.800	33.65	8.56	39.27	100.09	103.03	---	---	Peak

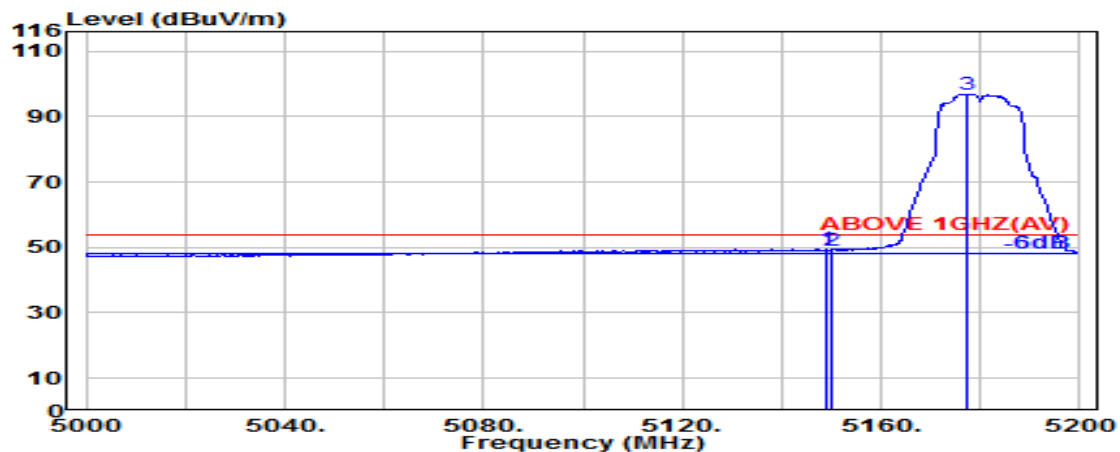

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.60	8.54	39.27	46.50	49.37	54.00	4.63	Average
5150.000	33.60	8.54	39.27	46.34	49.21	54.00	4.79	Average
@ 5177.400	33.65	8.56	39.27	93.89	96.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

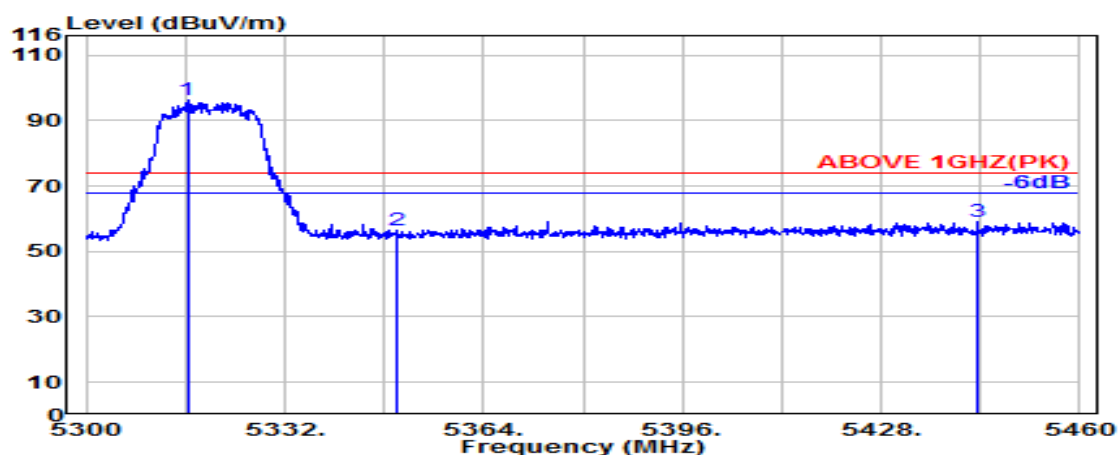

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.300	33.97	8.65	39.26	92.76	96.11	---	---	Peak
5350.000	33.90	8.67	39.26	53.02	56.33	74.00	17.67	Peak
5443.500	33.99	8.72	39.25	55.64	59.09	74.00	14.91	Peak

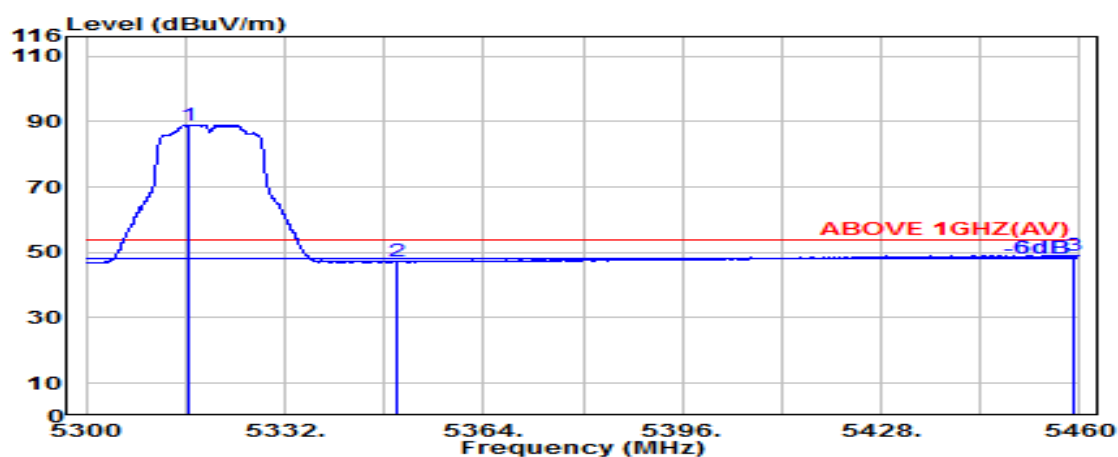

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.600	33.97	8.65	39.26	85.69	89.04	---	---	Average
5350.000	33.90	8.67	39.26	43.79	47.09	54.00	6.91	Average
5459.000	34.02	8.73	39.25	45.59	49.08	54.00	4.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

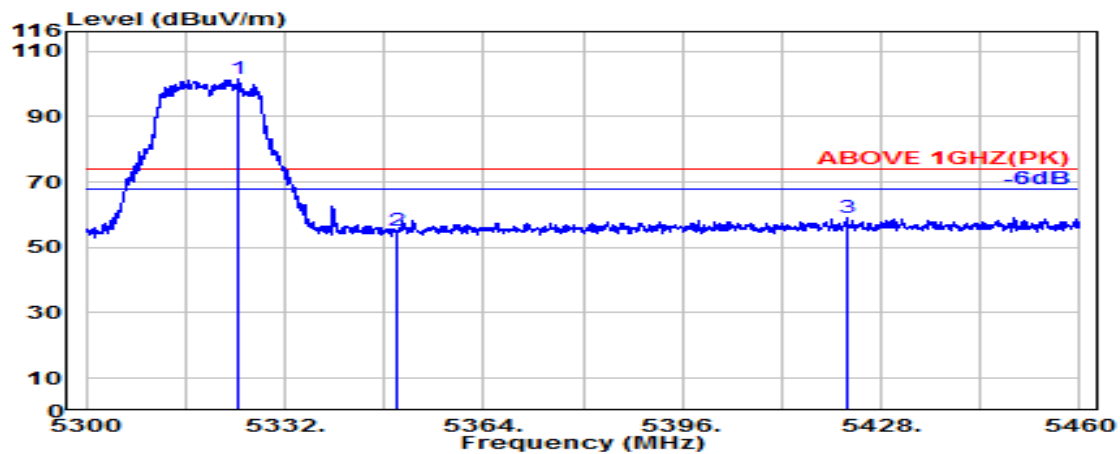

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5324.600	33.95	8.65	39.26	98.38	101.72	---	---	Peak
5350.000	33.90	8.67	39.26	51.65	54.95	74.00	19.05	Peak
5422.400	33.94	8.71	39.25	55.65	59.05	74.00	14.95	Peak

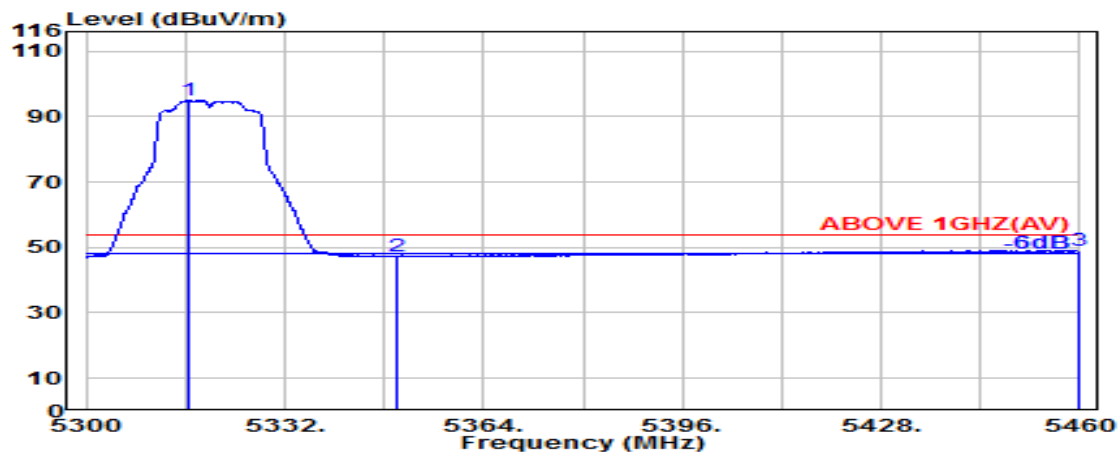


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5316.600	33.97	8.65	39.26	91.64	94.99	---	---	Average
5350.000	33.90	8.67	39.26	43.80	47.11	54.00	6.89	Average
5460.000	34.02	8.73	39.25	45.63	49.13	54.00	4.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

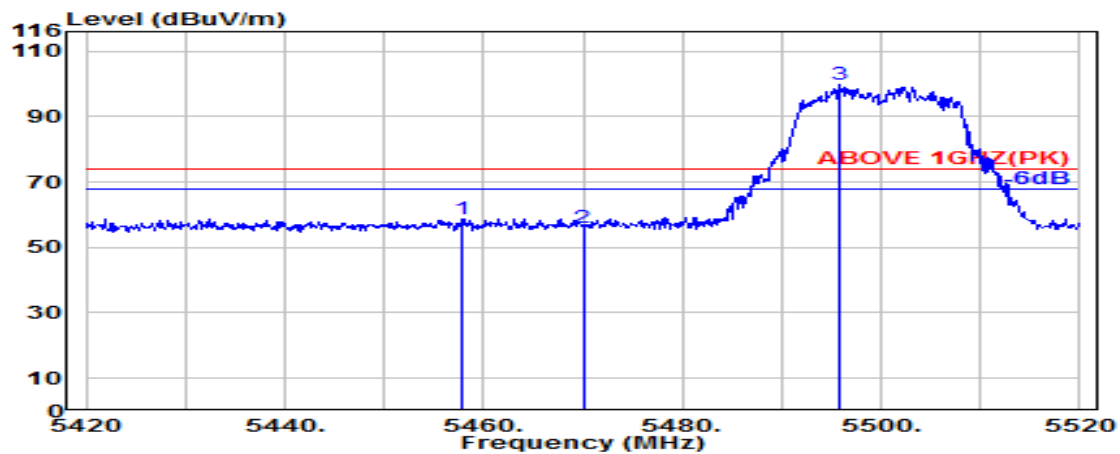

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.700	34.02	8.73	39.25	55.30	58.79	74.00	15.21	Peak
5470.000	34.04	8.74	39.25	52.57	56.09	74.00	17.91	Peak
@ 5495.900	34.09	8.75	39.25	96.29	99.89	---	---	Peak

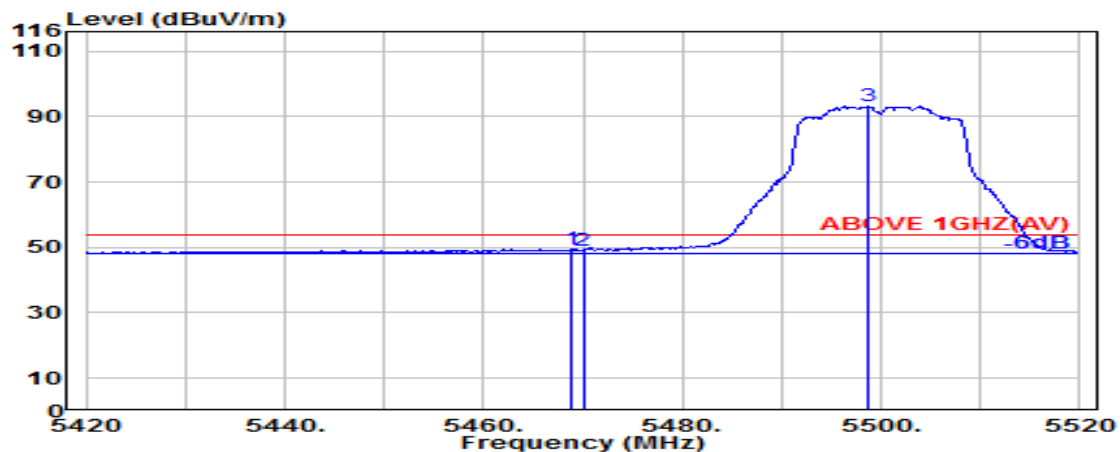

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.74	39.25	45.80	49.32	54.00	4.68	Average
5470.000	34.04	8.74	39.25	45.59	49.11	54.00	4.89	Average
@ 5498.700	34.10	8.75	39.25	89.48	93.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

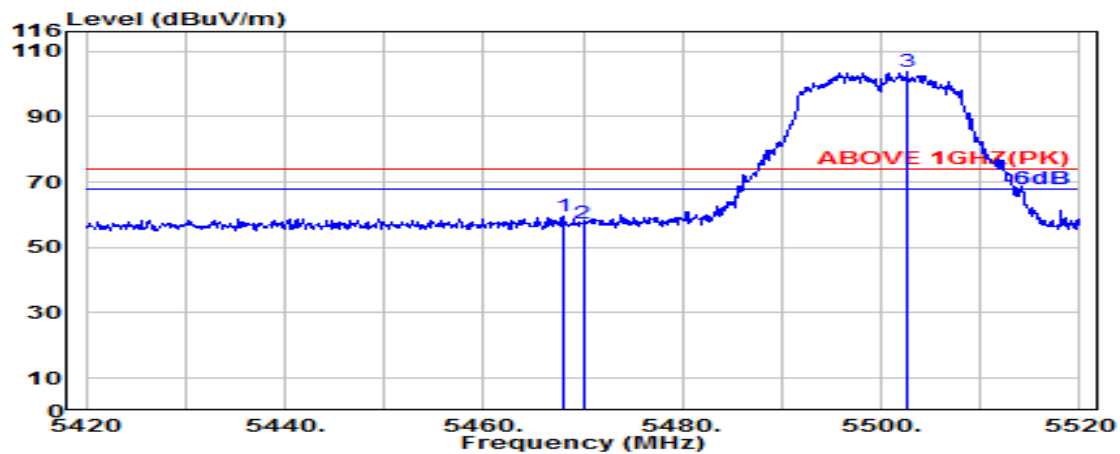

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.100	34.04	8.73	39.25	55.92	59.44	74.00	14.56	Peak
5470.000	34.04	8.74	39.25	53.72	57.24	74.00	16.76	Peak
@ 5502.600	34.09	8.75	39.25	99.97	103.57	---	---	Peak

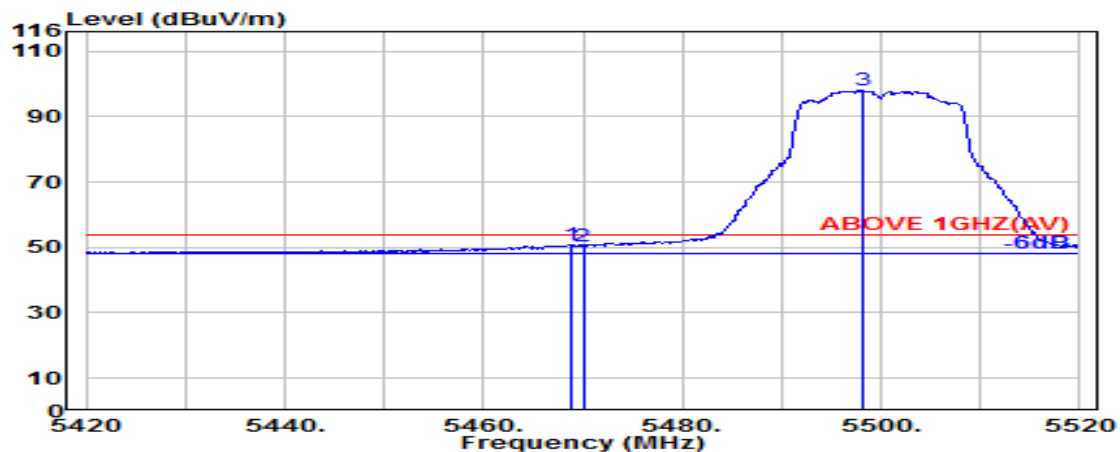


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.900	34.04	8.74	39.25	47.34	50.86	54.00	3.14	Average
5470.000	34.04	8.74	39.25	46.96	50.48	54.00	3.52	Average
@ 5498.100	34.10	8.75	39.25	94.31	97.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

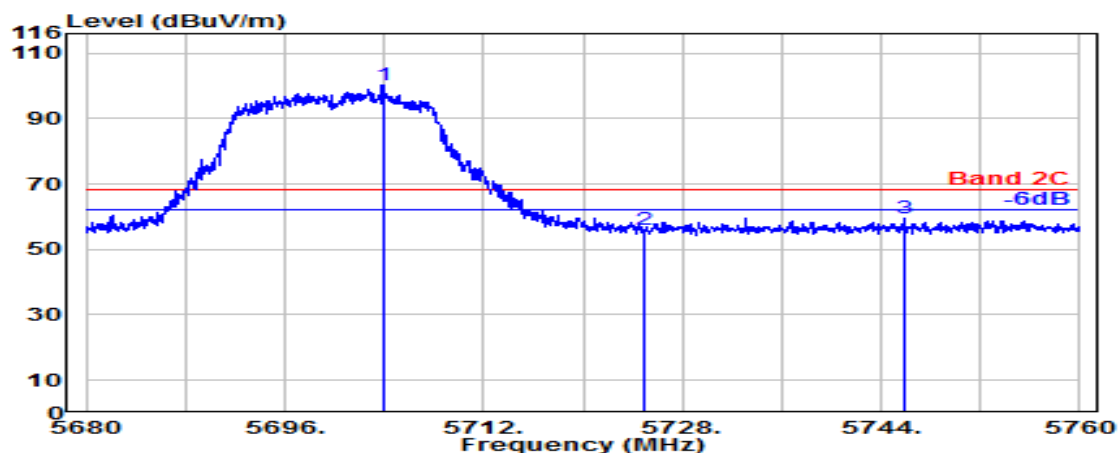

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.900	33.70	8.87	39.29	96.89	100.17	---	---	Peak
5725.000	33.70	8.88	39.29	52.60	55.89	68.20	12.31	Peak
5745.850	33.70	8.89	39.30	56.12	59.42	68.20	8.78	Peak

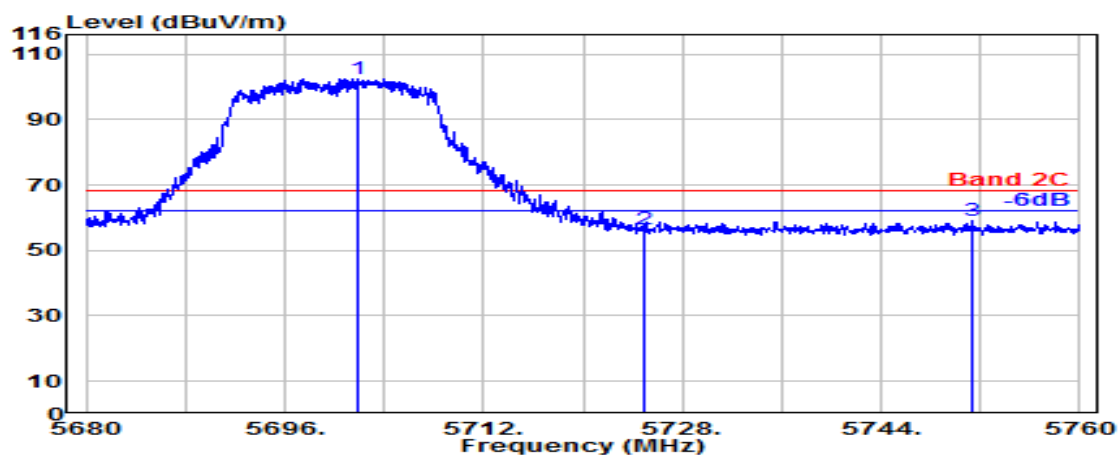

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.900	33.70	8.87	39.29	99.34	102.62	---	---	Peak
5725.000	33.70	8.88	39.29	53.36	56.65	68.20	11.55	Peak
5751.350	33.71	8.90	39.30	55.57	58.88	68.20	9.32	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

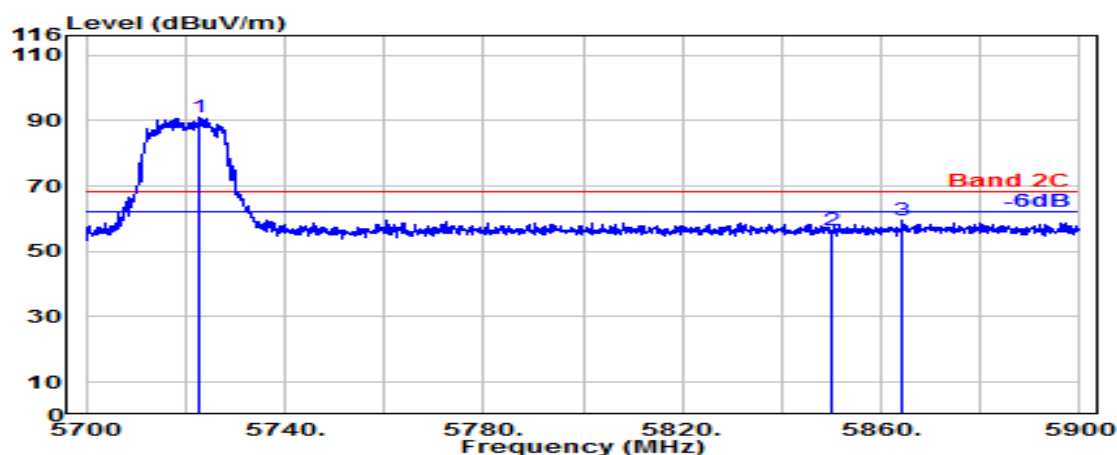

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.600	33.70	8.88	39.29	87.56	90.85	---	---	Peak
5850.000	34.00	8.95	39.31	52.63	56.26	68.20	11.94	Peak
5864.400	34.03	8.96	39.32	55.68	59.35	68.20	8.85	Peak

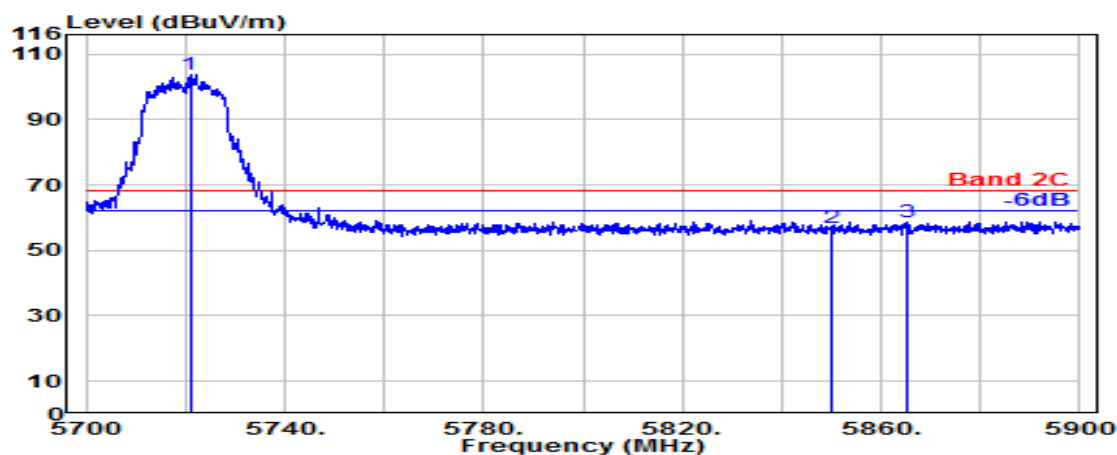


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.900	33.70	8.88	39.29	100.63	103.91	---	---	Peak
5850.000	34.00	8.95	39.31	53.26	56.90	68.20	11.30	Peak
5865.100	34.03	8.96	39.32	55.05	58.72	68.20	9.48	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

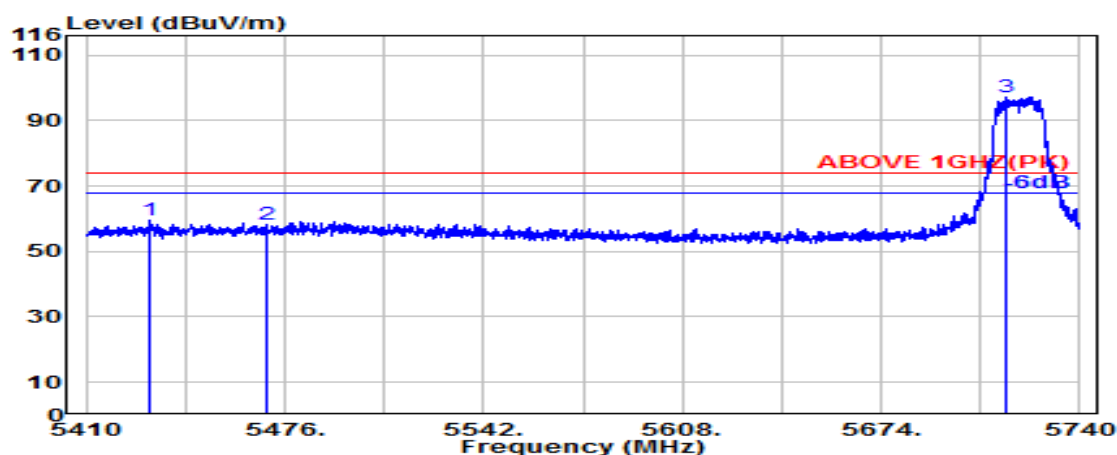

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5431.100	33.96	8.71	39.25	56.06	59.48	74.00	14.52	Peak
5470.000	34.04	8.74	39.25	54.48	58.01	74.00	15.99	Peak
@ 5715.500	33.70	8.88	39.29	94.03	97.31	---	---	Peak

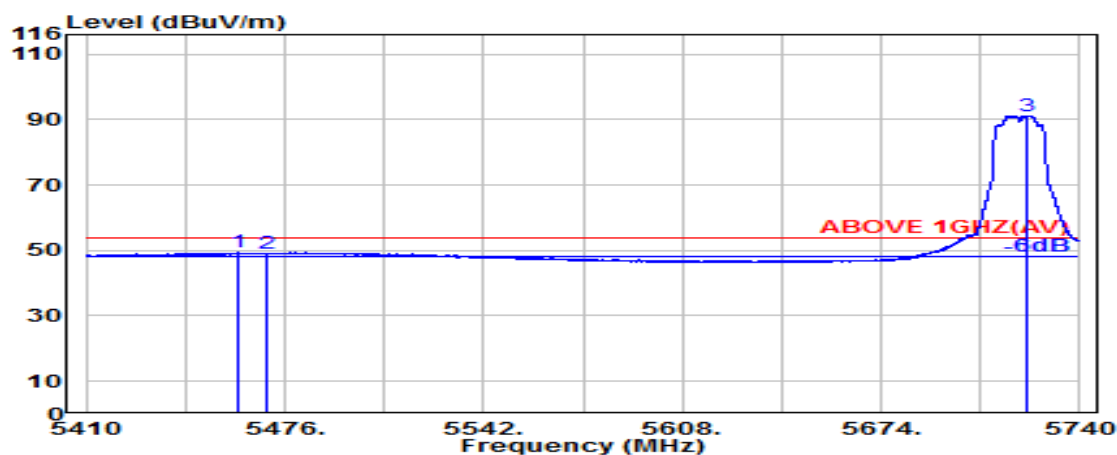


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5460.600	34.02	8.73	39.25	45.75	49.25	54.00	4.75	Average
5470.000	34.04	8.74	39.25	45.40	48.93	54.00	5.07	Average
@ 5722.000	33.70	8.88	39.29	87.97	91.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

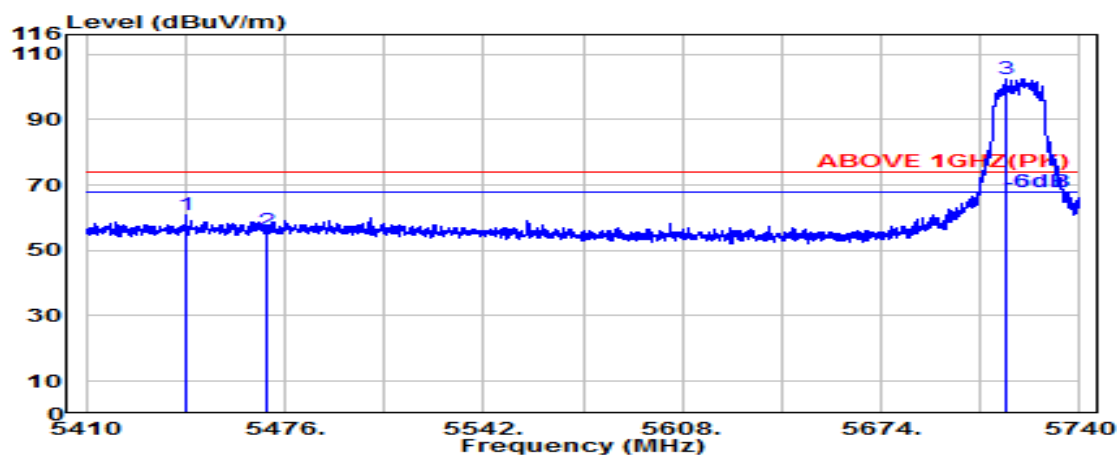

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.200	33.99	8.72	39.25	57.44	60.89	74.00	13.11	Peak
5470.000	34.04	8.74	39.25	52.41	55.94	74.00	18.06	Peak
@ 5715.500	33.70	8.88	39.29	99.24	102.52	---	---	Peak

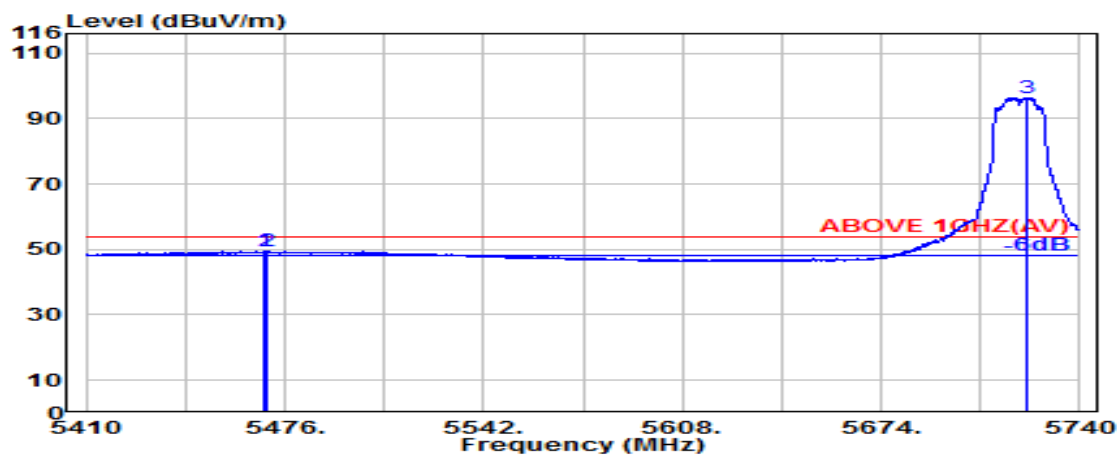

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.74	39.25	45.80	49.32	54.00	4.68	Average
5470.000	34.04	8.74	39.25	45.76	49.28	54.00	4.72	Average
@ 5722.000	33.70	8.88	39.29	93.13	96.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

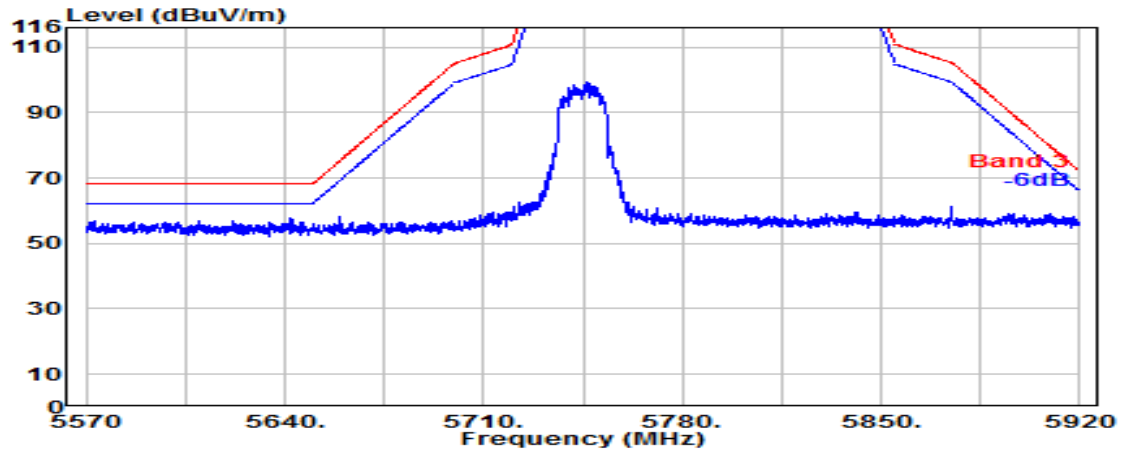

Antenna at Vertical Polarization

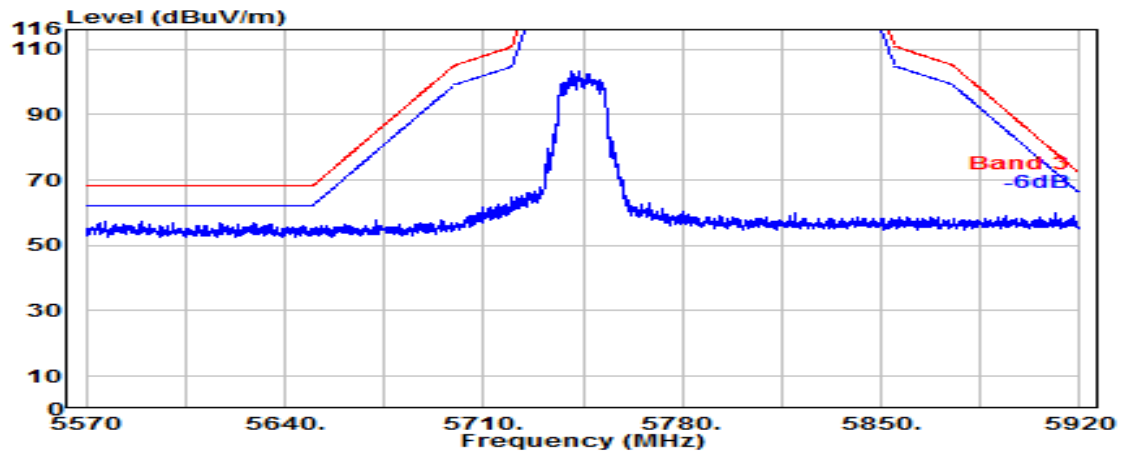


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

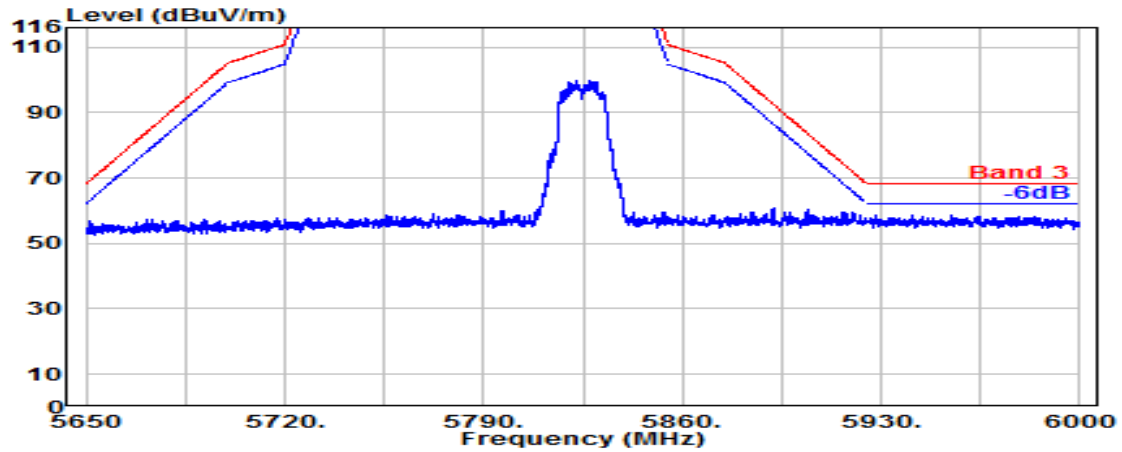

Antenna at Vertical Polarization

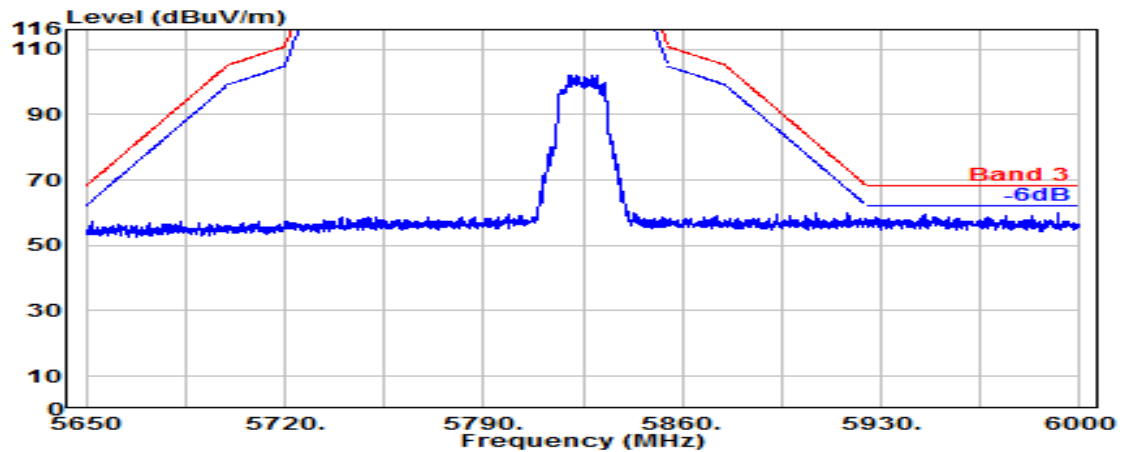


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

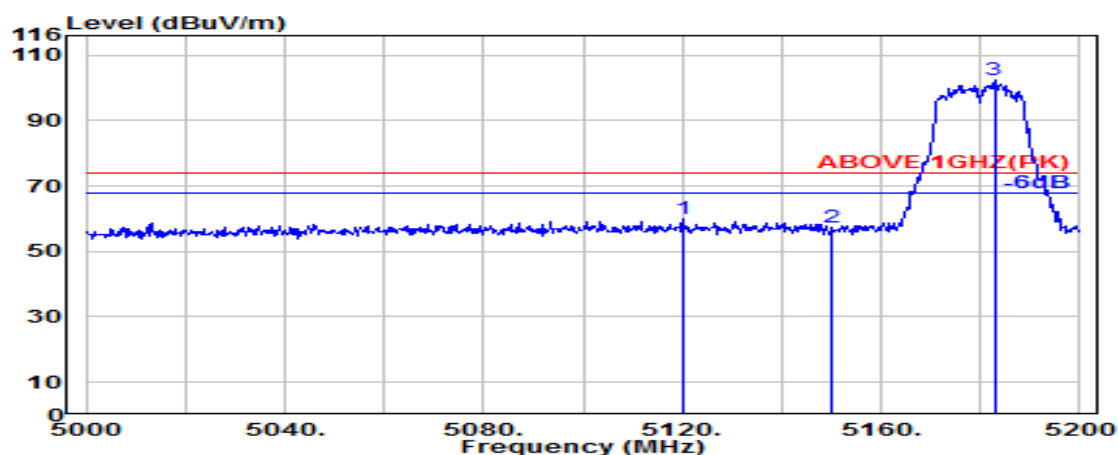

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.200	33.60	8.53	39.27	56.97	59.82	74.00	14.18	Peak
5150.000	33.60	8.54	39.27	54.39	57.26	74.00	16.74	Peak
@ 5182.800	33.67	8.56	39.27	99.35	102.31	---	---	Peak

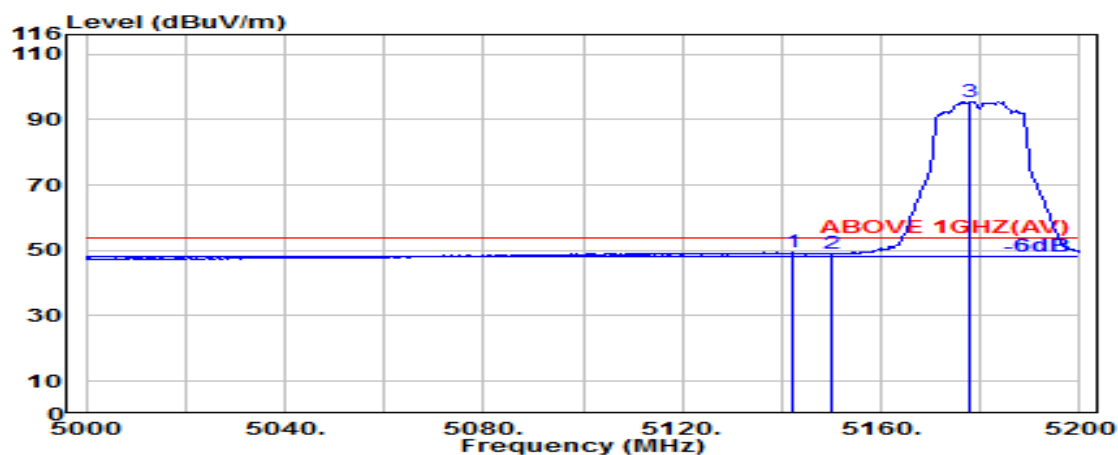

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.400	33.60	8.54	39.27	46.44	49.31	54.00	4.69	Average
5150.000	33.60	8.54	39.27	46.12	48.99	54.00	5.01	Average
@ 5178.000	33.66	8.56	39.27	92.54	95.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

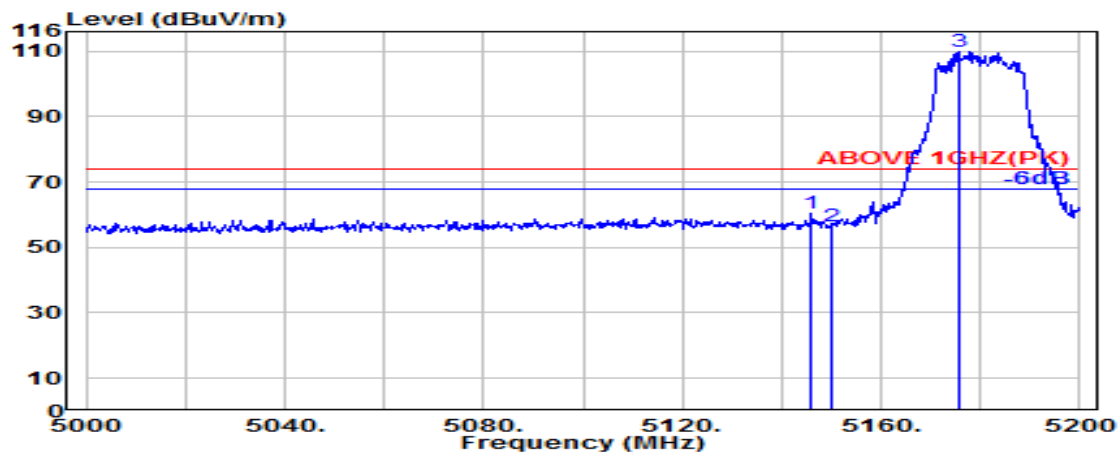

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.60	8.54	39.27	57.52	60.39	74.00	13.61	Peak
5150.000	33.60	8.54	39.27	53.70	56.57	74.00	17.43	Peak
@ 5175.600	33.65	8.56	39.27	107.07	110.02	---	---	Peak

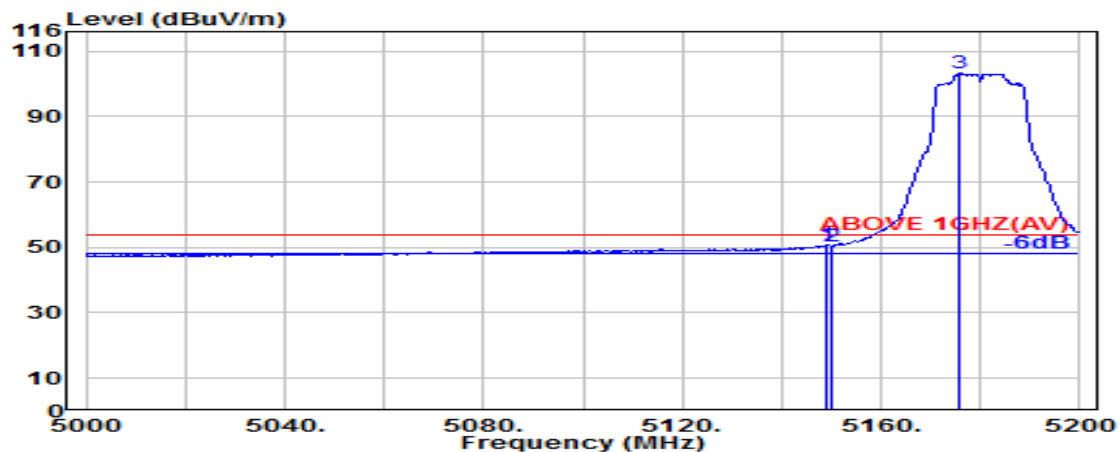

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.60	8.54	39.27	47.87	50.74	54.00	3.26	Average
5150.000	33.60	8.54	39.27	47.62	50.50	54.00	3.50	Average
@ 5175.800	33.65	8.56	39.27	100.39	103.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

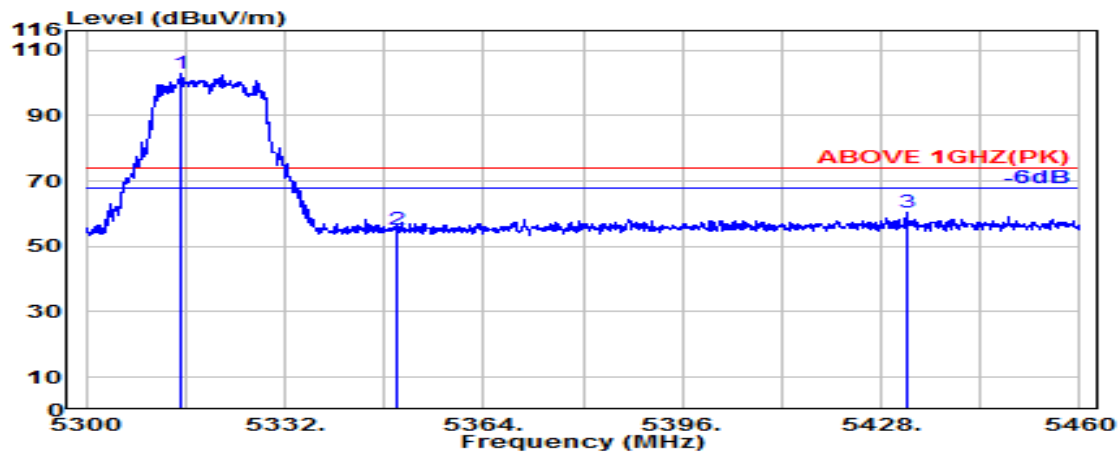

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.200	33.97	8.64	39.26	99.45	102.80	---	---	Peak
5350.000	33.90	8.67	39.26	51.64	54.94	74.00	19.06	Peak
5432.000	33.96	8.71	39.25	57.09	60.52	74.00	13.48	Peak

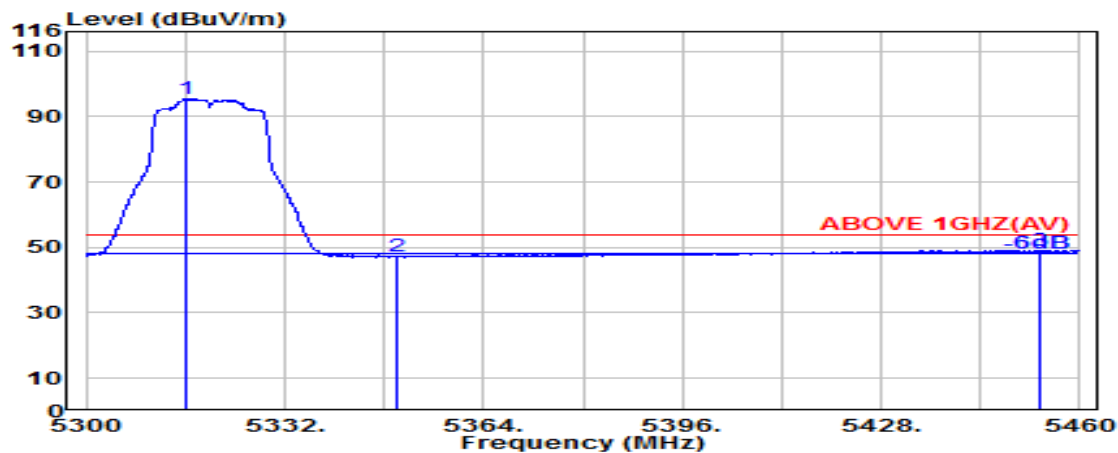

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.97	8.65	39.26	92.27	95.62	---	---	Average
5350.000	33.90	8.67	39.26	43.96	47.26	54.00	6.74	Average
5453.400	34.01	8.73	39.25	45.57	49.05	54.00	4.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

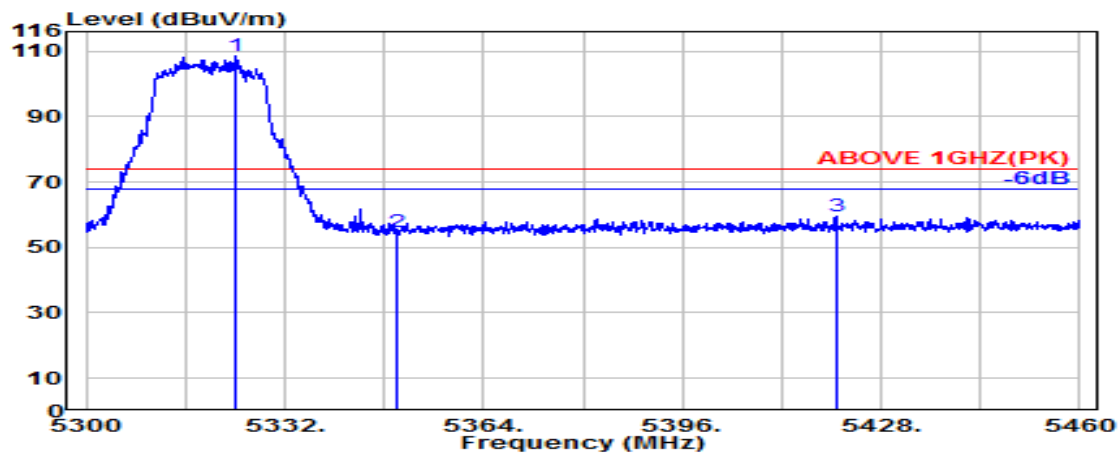

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.200	33.95	8.65	39.26	105.29	108.63	---	---	Peak
5350.000	33.90	8.67	39.26	51.59	54.89	74.00	19.11	Peak
5420.700	33.94	8.71	39.25	56.07	59.47	74.00	14.53	Peak

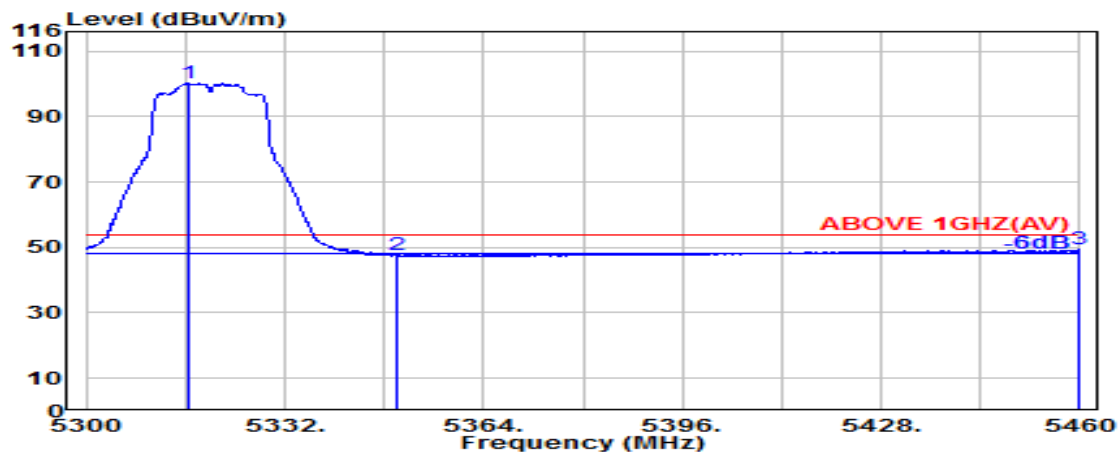

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.500	33.97	8.65	39.26	97.01	100.36	---	---	Average
5350.000	33.90	8.67	39.26	44.33	47.63	54.00	6.37	Average
5459.900	34.02	8.73	39.25	45.88	49.38	54.00	4.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

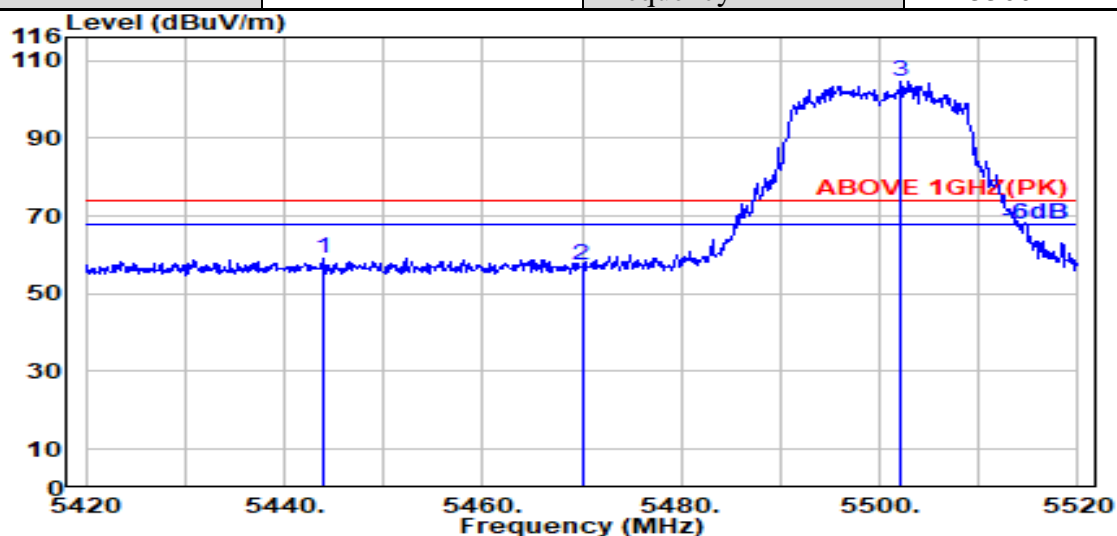

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.000	34.19	9.05	39.26	55.14	59.12	74.00	14.88	Peak
5470.000	34.16	9.06	39.26	53.29	57.25	74.00	16.75	Peak
@ 5502.200	34.10	9.08	39.26	100.61	104.53	---	---	Peak

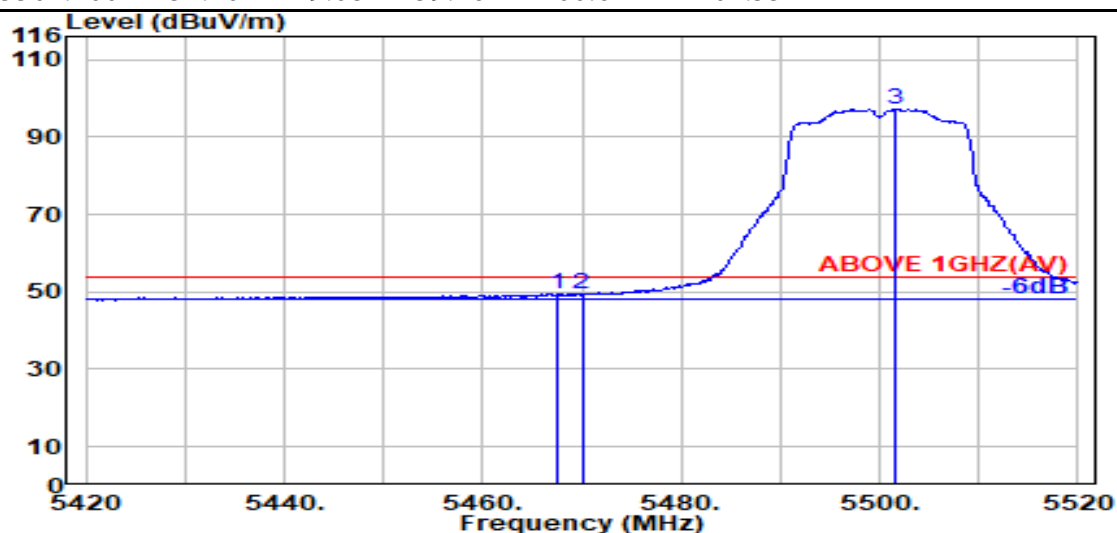


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.16	9.06	39.26	45.48	49.44	54.00	4.56	Average
5470.000	34.16	9.06	39.26	45.36	49.32	54.00	4.68	Average
@ 5501.500	34.10	9.08	39.26	93.46	97.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

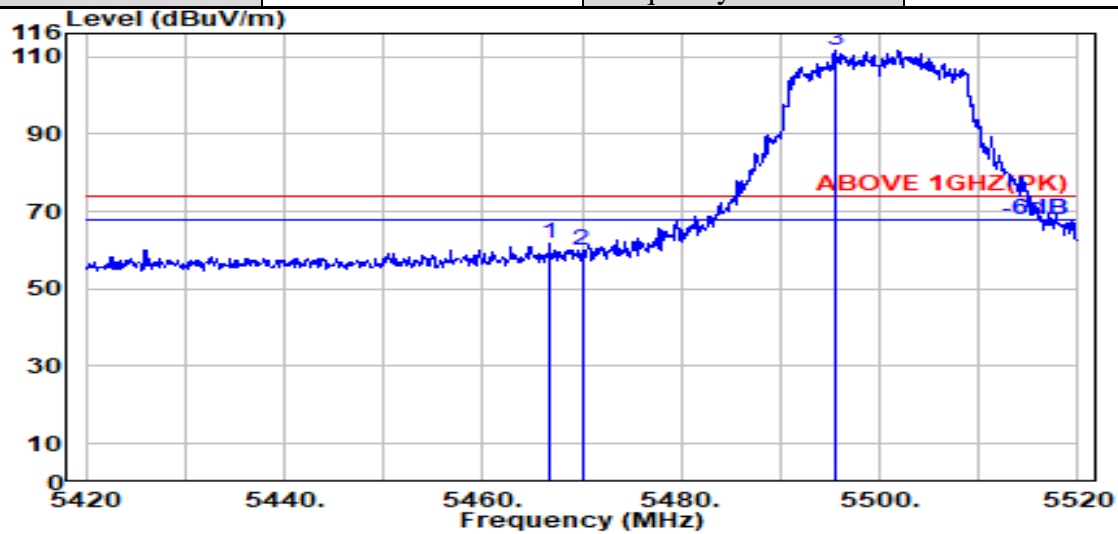

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.17	9.06	39.26	57.58	61.55	74.00	12.45	Peak
5470.000	34.16	9.06	39.26	55.93	59.89	74.00	14.11	Peak
@ 5495.500	34.11	9.07	39.26	107.82	111.75	---	---	Peak

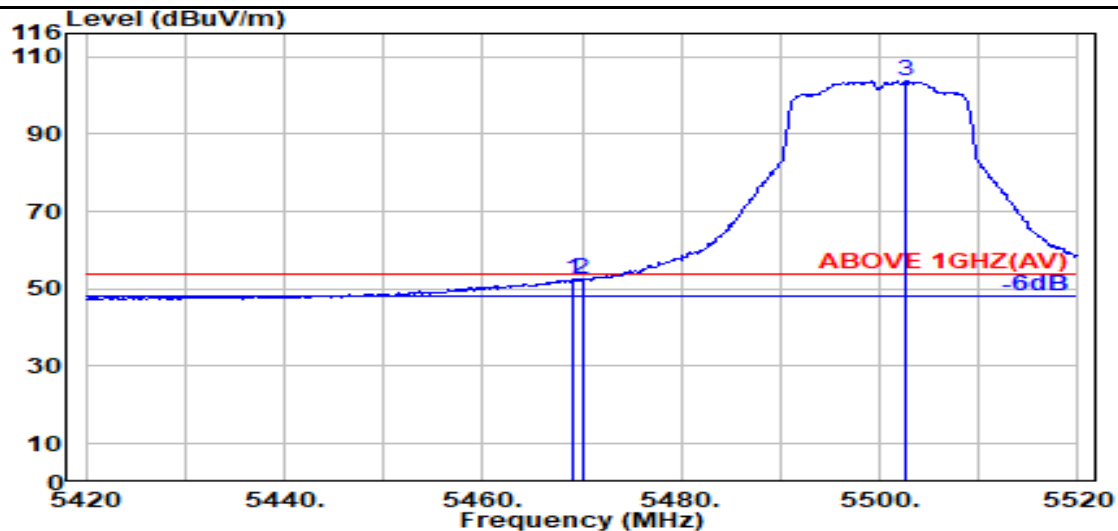

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.100	34.16	9.06	39.26	48.49	52.45	54.00	1.55	Average
5470.000	34.16	9.06	39.26	48.70	52.66	54.00	1.34	Average
@ 5502.700	34.10	9.08	39.26	99.78	103.70	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

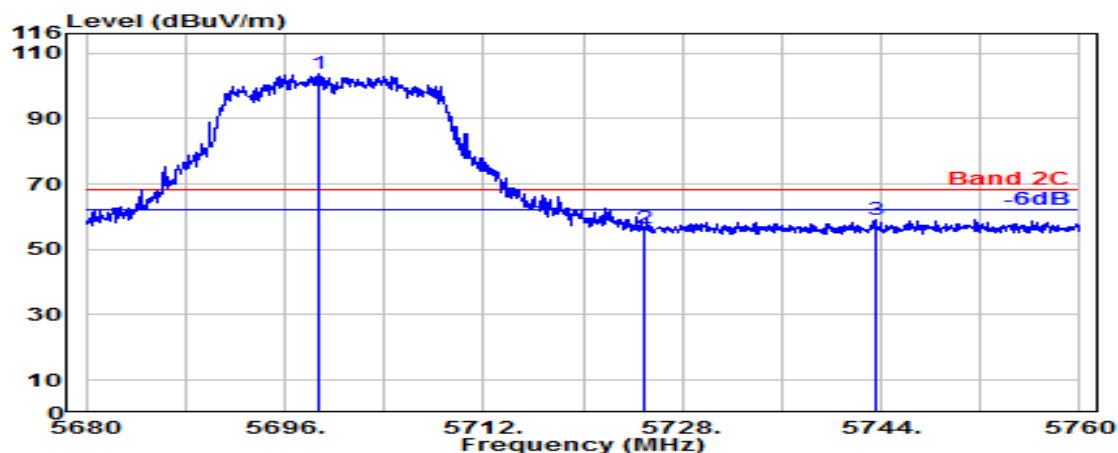

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.700	33.70	8.87	39.29	100.29	103.58	---	---	Peak
	5725.000	33.70	8.88	39.29	53.24	56.52	68.20	11.68	Peak
	5743.500	33.70	8.89	39.29	55.86	59.16	68.20	9.04	Peak

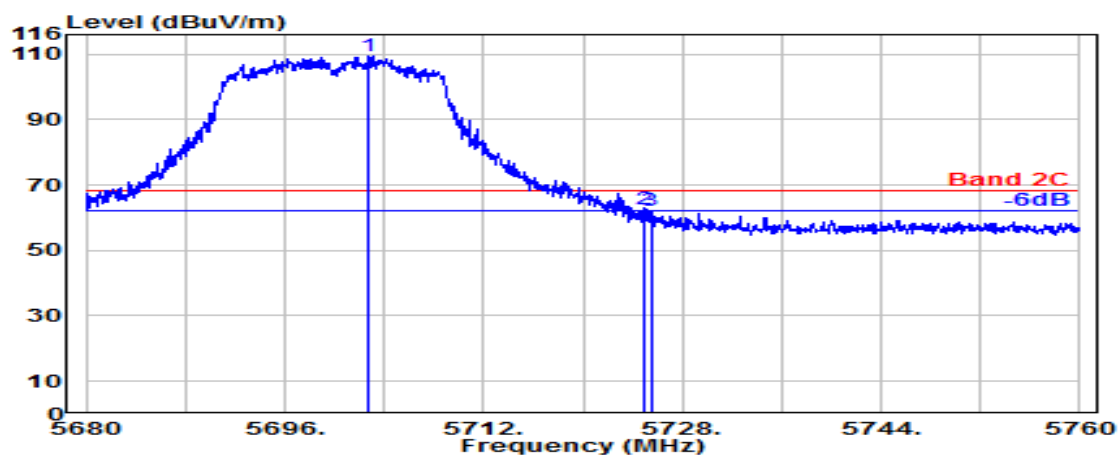

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.800	33.70	8.87	39.29	106.36	109.64	---	---	Peak
	5725.000	33.70	8.88	39.29	59.10	62.39	68.20	5.81	Peak
	5725.450	33.70	8.88	39.29	58.67	61.96	68.20	6.24	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

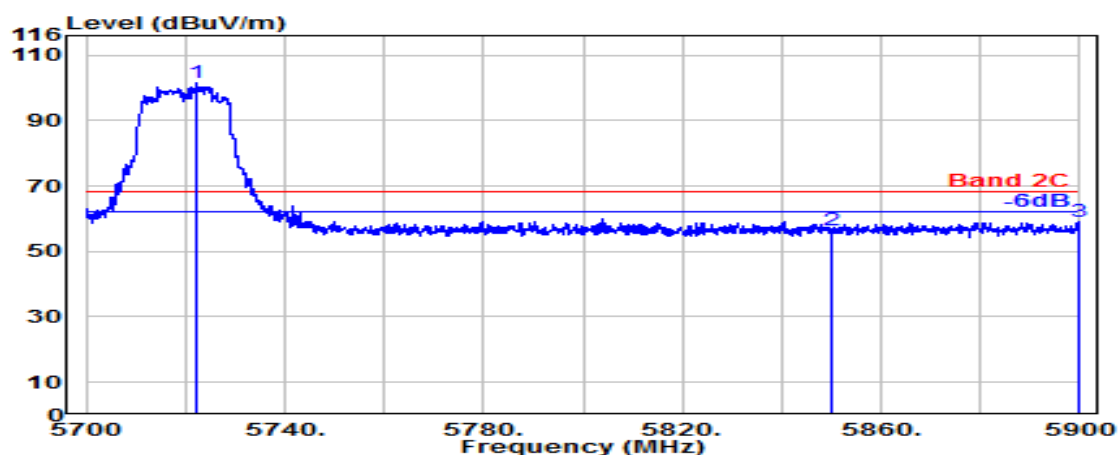

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5722.100	33.70	8.88	39.29	98.17	101.46	---	---	Peak
5850.000	34.00	8.95	39.31	52.62	56.25	68.20	11.95	Peak
5899.600	34.10	8.98	39.32	55.15	58.91	68.20	9.29	Peak

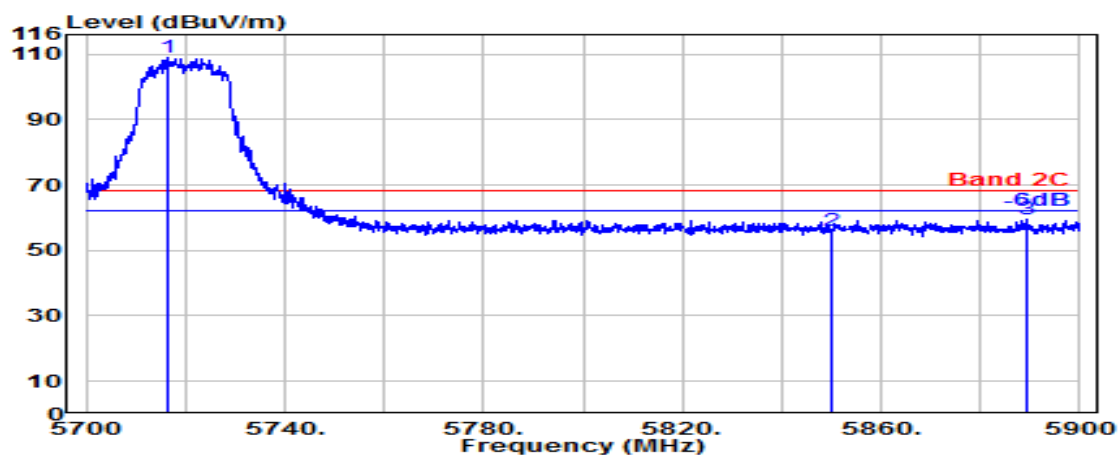

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5716.600	33.70	8.88	39.29	105.61	108.89	---	---	Peak
5850.000	34.00	8.95	39.31	52.36	55.99	68.20	12.21	Peak
5889.200	34.08	8.97	39.32	55.72	59.45	68.20	8.75	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

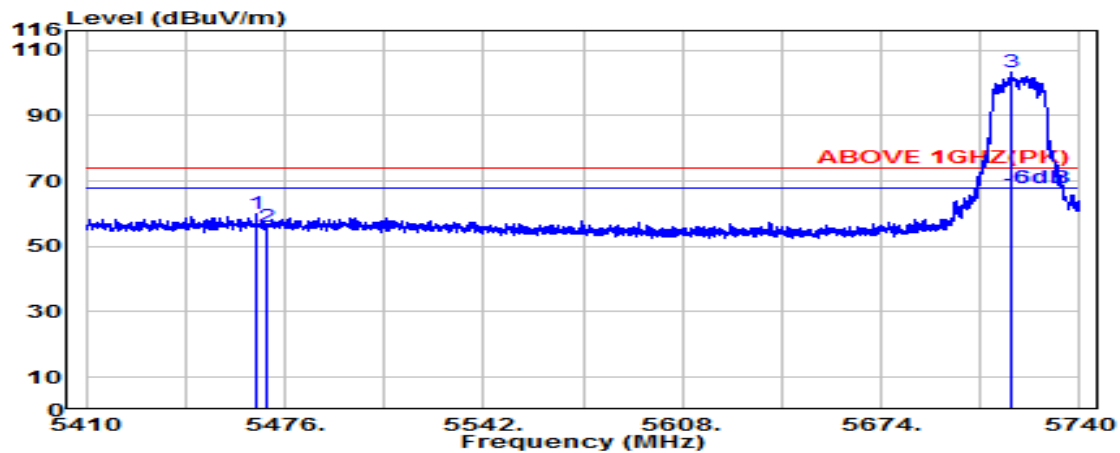

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.73	39.25	56.59	60.10	74.00	13.90	Peak
5470.000	34.04	8.74	39.25	52.35	55.87	74.00	18.13	Peak
@ 5717.500	33.70	8.88	39.29	99.92	103.21	---	---	Peak

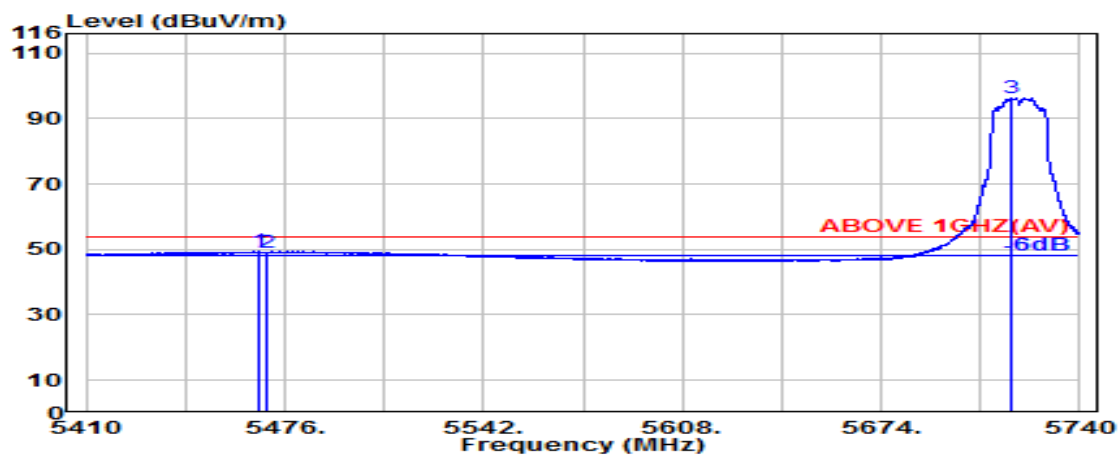

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.03	8.73	39.25	45.77	49.28	54.00	4.72	Average
5470.000	34.04	8.74	39.25	45.29	48.82	54.00	5.18	Average
@ 5717.200	33.70	8.88	39.29	92.93	96.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

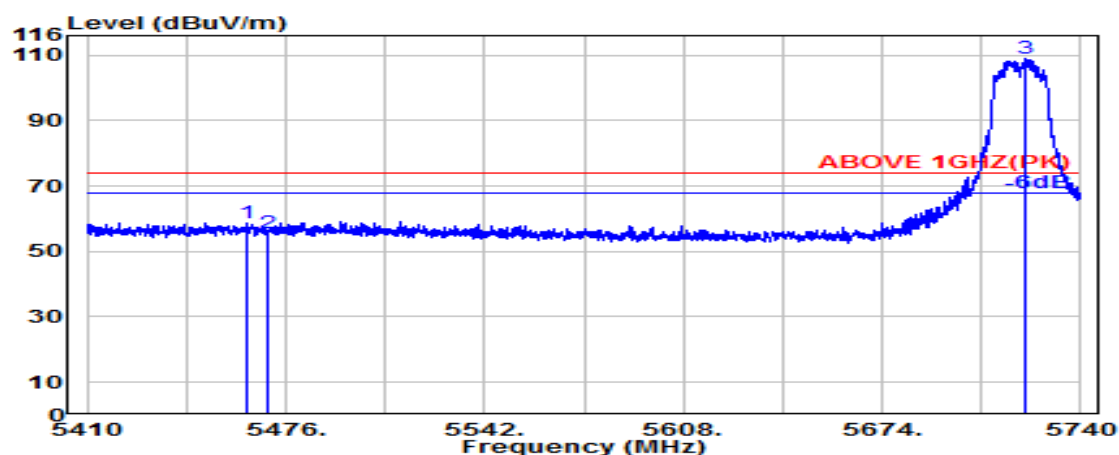

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.03	8.73	39.25	55.05	58.55	74.00	15.45	Peak
5470.000	34.04	8.74	39.25	52.00	55.52	74.00	18.48	Peak
@ 5721.600	33.70	8.88	39.29	105.61	108.90	---	---	Peak

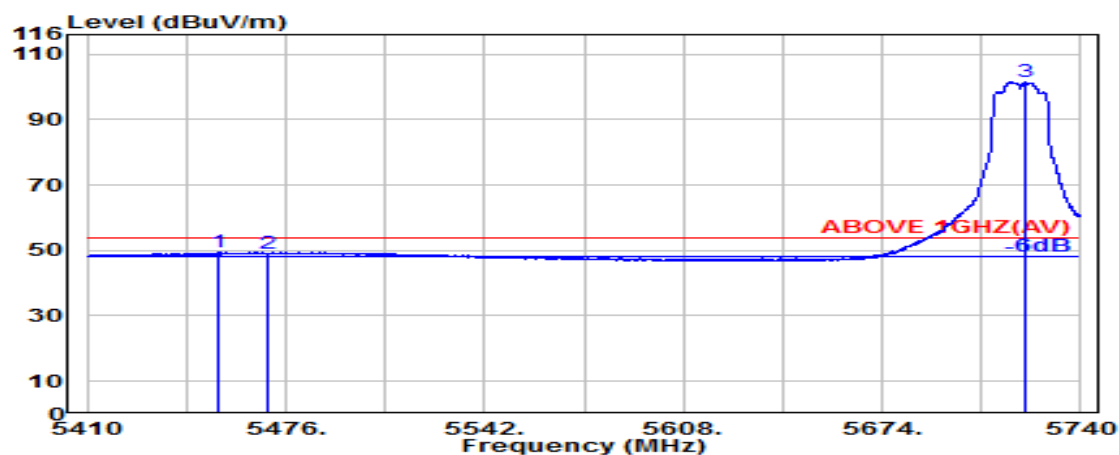

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.900	34.01	8.73	39.25	45.90	49.38	54.00	4.62	Average
5470.000	34.04	8.74	39.25	45.53	49.05	54.00	4.95	Average
@ 5721.300	33.70	8.88	39.29	98.15	101.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

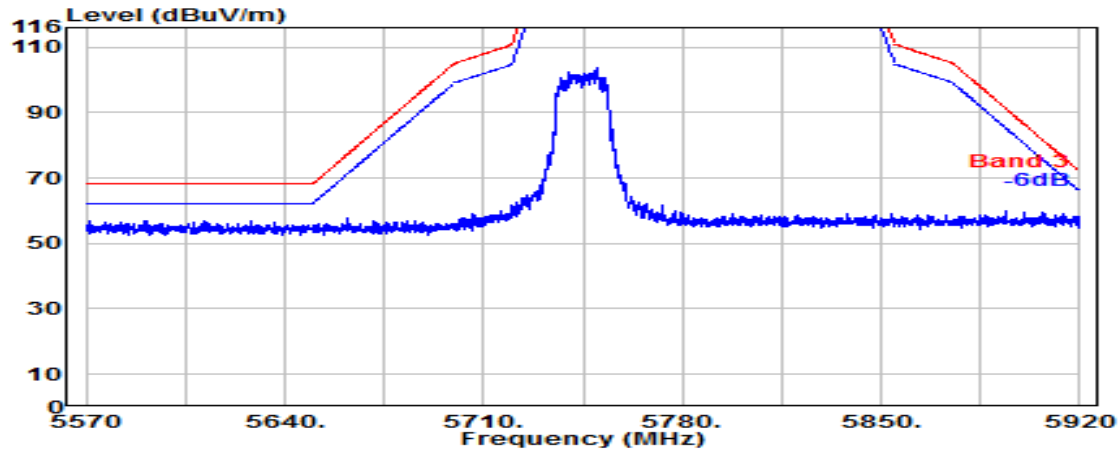

Antenna at Vertical Polarization

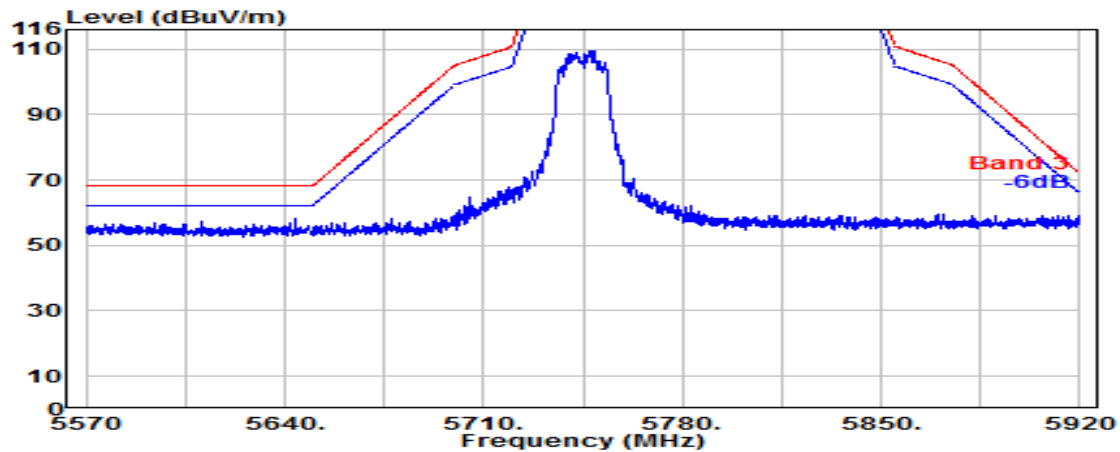


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

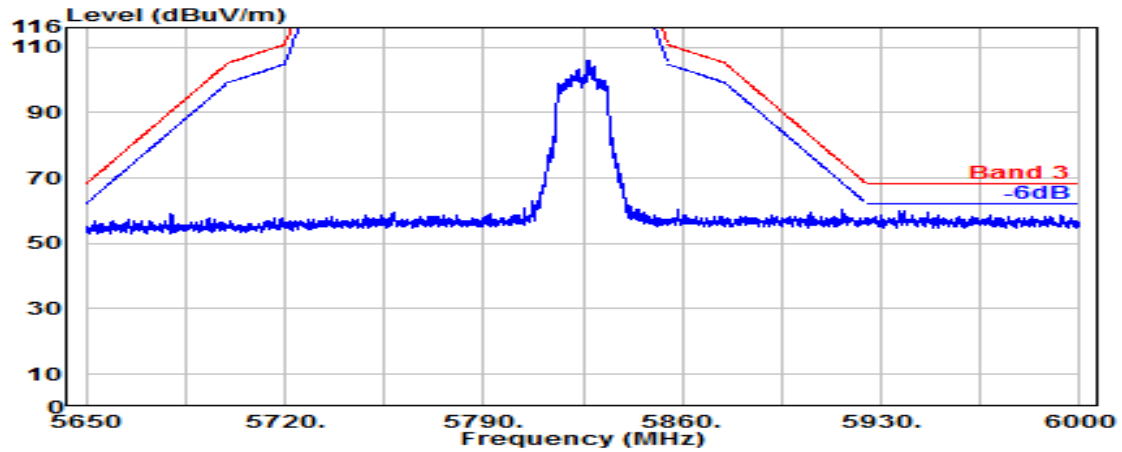

Antenna at Vertical Polarization

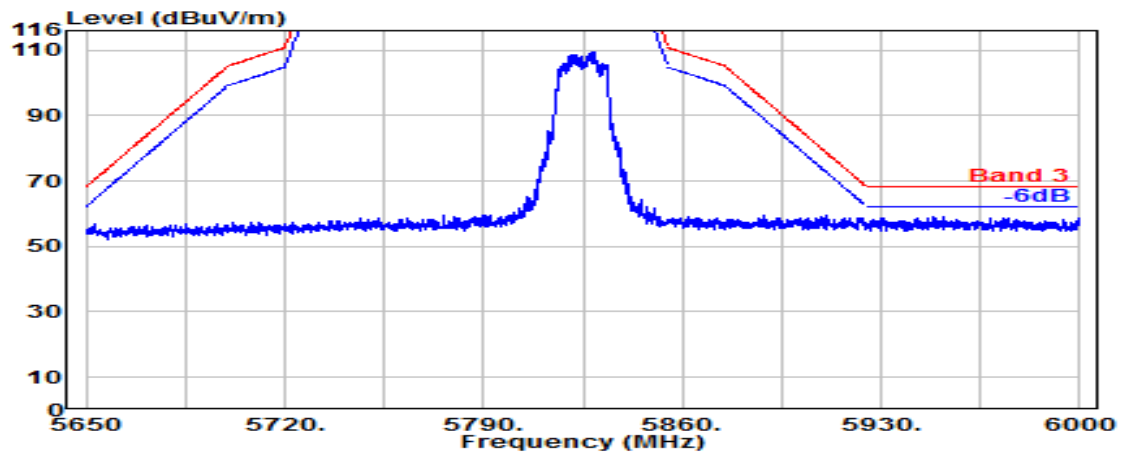


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

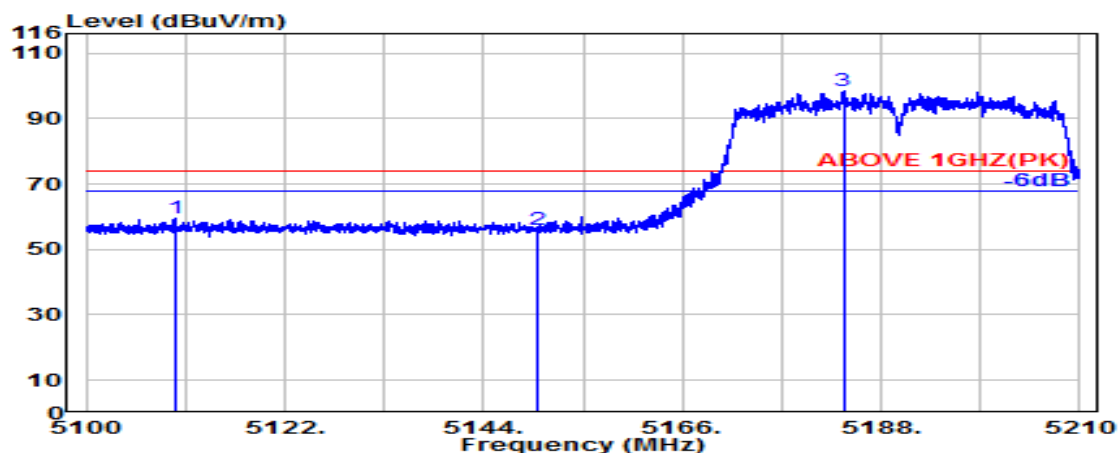

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5109.774	33.60	8.52	39.27	56.57	59.41	74.00	14.59	Peak
5150.000	33.60	8.54	39.27	53.25	56.12	74.00	17.88	Peak
@ 5183.820	33.67	8.56	39.27	95.33	98.29	---	---	Peak

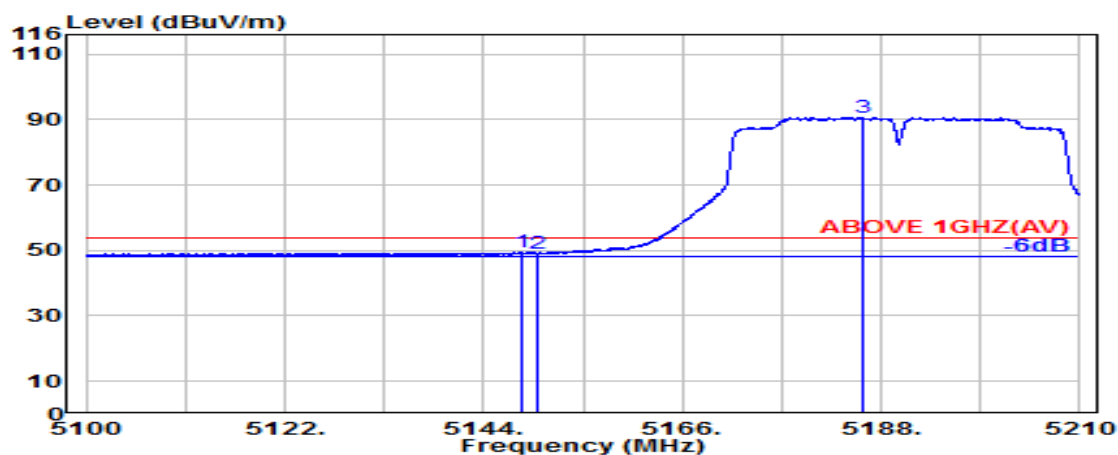


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.369	33.60	8.54	39.27	46.61	49.48	54.00	4.52	Average
5150.000	33.60	8.54	39.27	46.27	49.14	54.00	4.86	Average
@ 5185.863	33.67	8.57	39.27	87.70	90.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

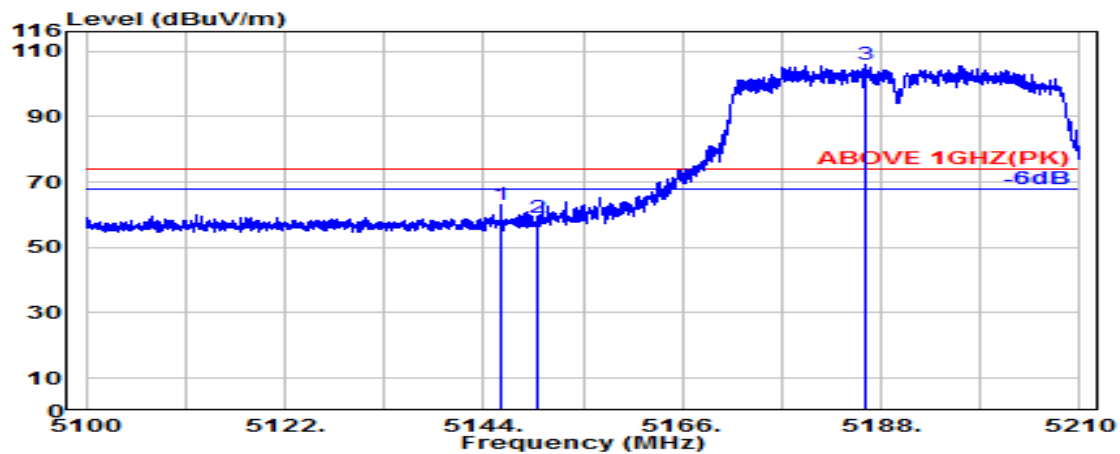

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.011	33.60	8.54	39.27	60.03	62.90	74.00	11.10	Peak
5150.000	33.60	8.54	39.27	56.34	59.22	74.00	14.78	Peak
@ 5186.366	33.67	8.57	39.27	102.75	105.72	---	---	Peak

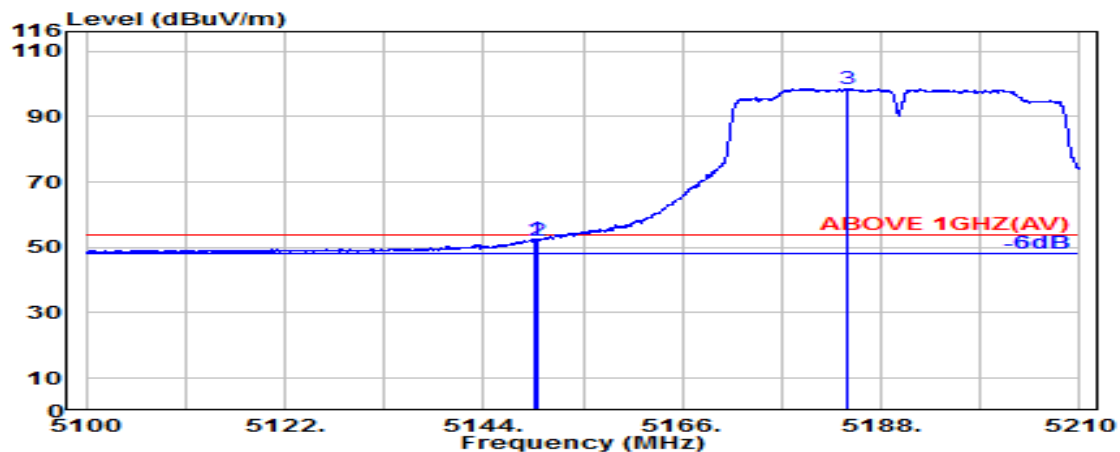

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.594	33.60	8.54	39.27	49.72	52.59	54.00	1.41	Average
5150.003	33.60	8.54	39.27	49.31	52.19	54.00	1.81	Average
@ 5184.197	33.67	8.57	39.27	95.60	98.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

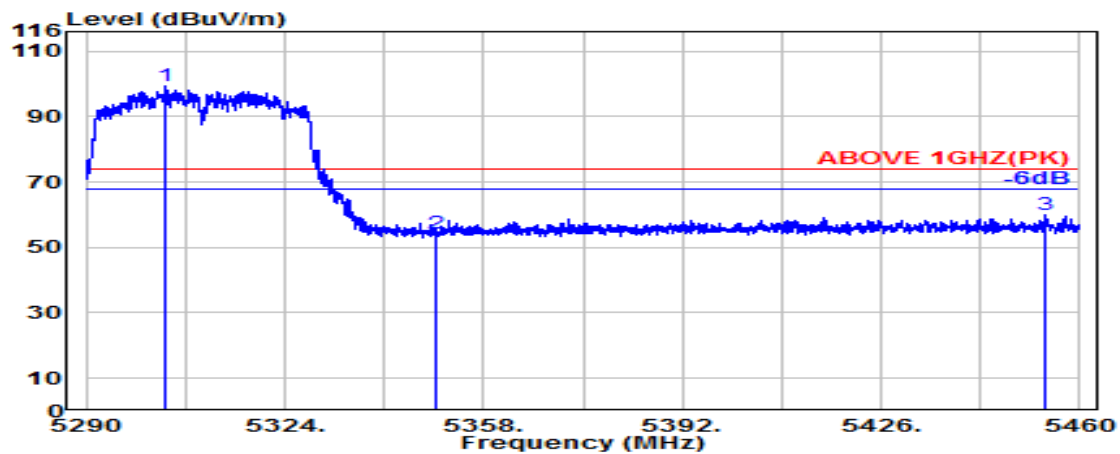

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.600	33.99	8.64	39.26	96.00	99.37	---	---	Peak
5350.000	33.90	8.67	39.26	50.98	54.29	74.00	19.71	Peak
5453.880	34.01	8.73	39.25	56.37	59.86	74.00	14.14	Peak

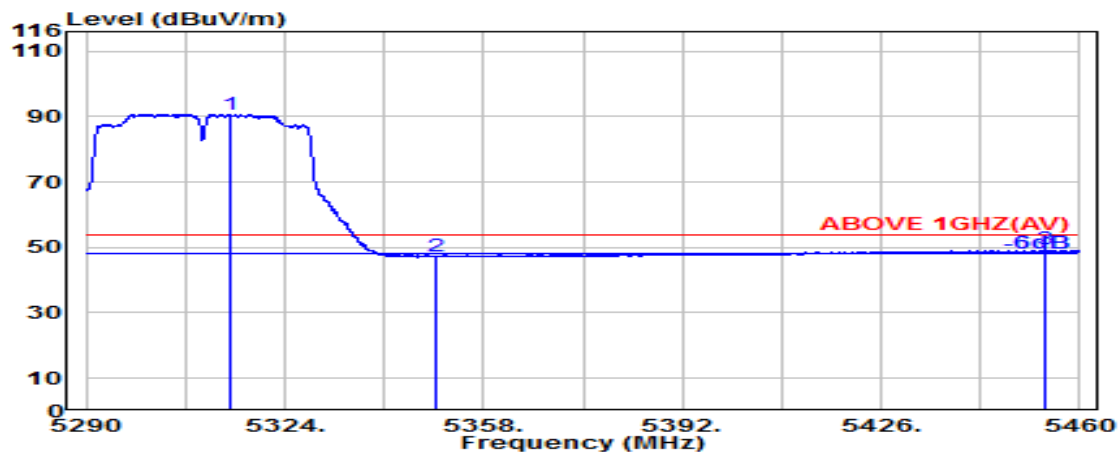

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.771	33.97	8.64	39.26	87.43	90.79	---	---	Average
5350.000	33.90	8.67	39.26	43.85	47.16	54.00	6.84	Average
5453.929	34.01	8.73	39.25	45.94	49.43	54.00	4.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

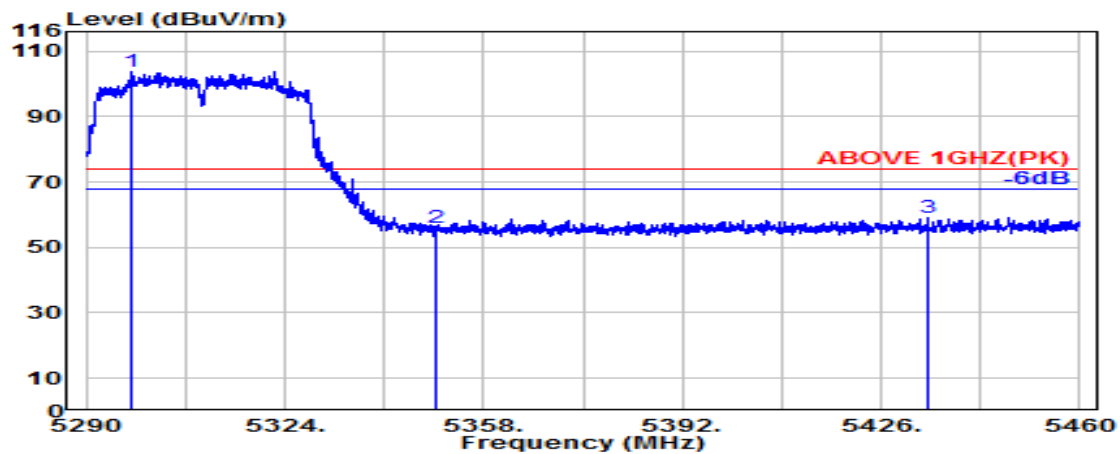

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5297.820	33.99	8.63	39.26	100.32	103.68	---	---	Peak
5350.000	33.90	8.67	39.26	52.62	55.93	74.00	18.07	Peak
5434.014	33.97	8.71	39.25	55.56	58.99	74.00	15.01	Peak

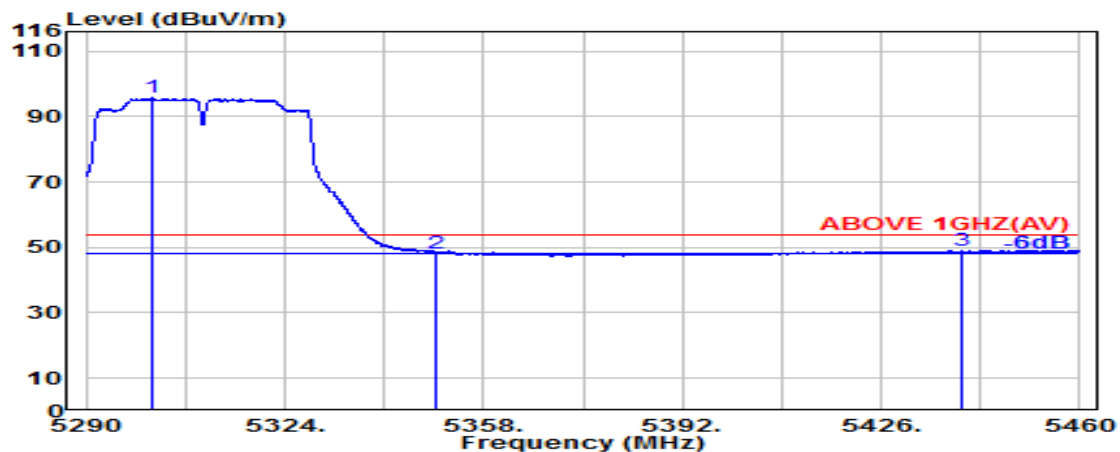

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5301.366	34.00	8.64	39.26	92.34	95.71	---	---	Average
5350.000	33.90	8.67	39.26	44.97	48.28	54.00	5.72	Average
5439.794	33.98	8.72	39.25	45.69	49.13	54.00	4.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

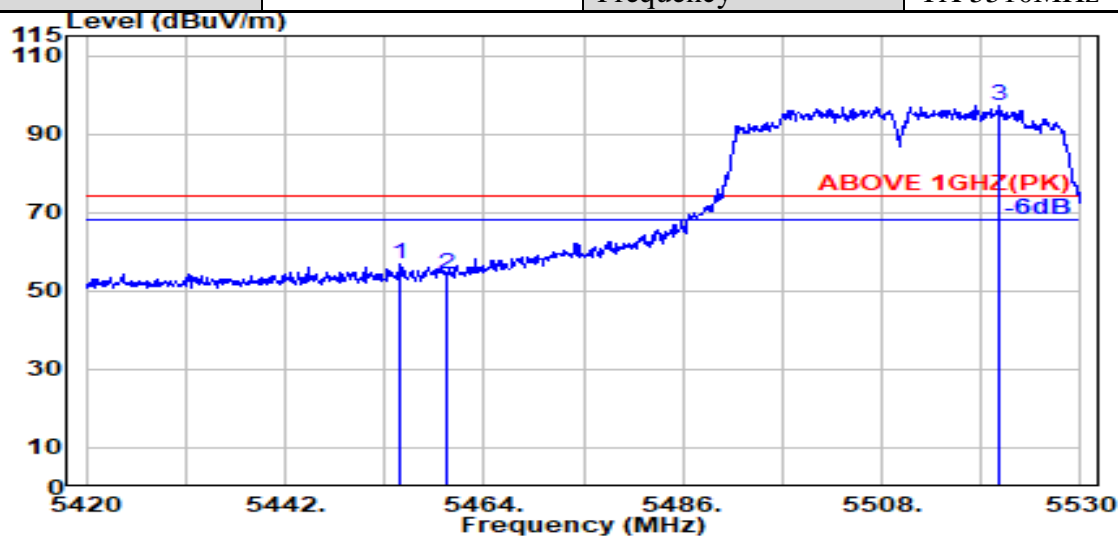

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5454.700	34.01	8.73	39.25	53.35	56.83	74.00	17.17	Peak
5460.000	34.02	8.73	39.25	50.70	54.20	74.00	19.80	Peak
@ 5520.900	34.06	8.77	39.25	93.84	97.41	---	---	Peak

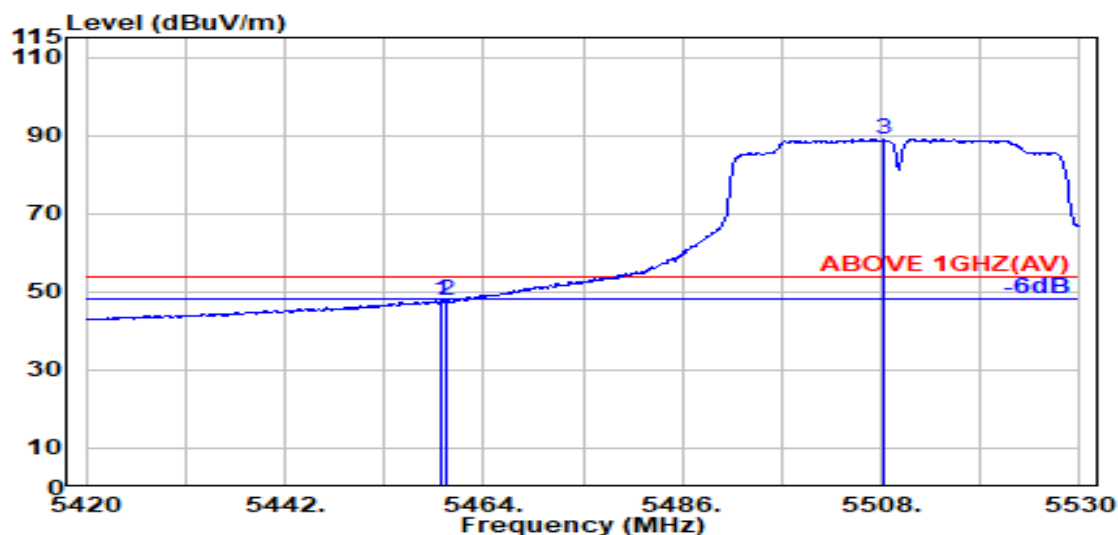


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.300	34.02	8.73	39.25	44.25	47.75	54.00	6.25	Average
5460.000	34.02	8.73	39.25	44.21	47.71	54.00	6.29	Average
@ 5508.300	34.08	8.76	39.25	85.31	88.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

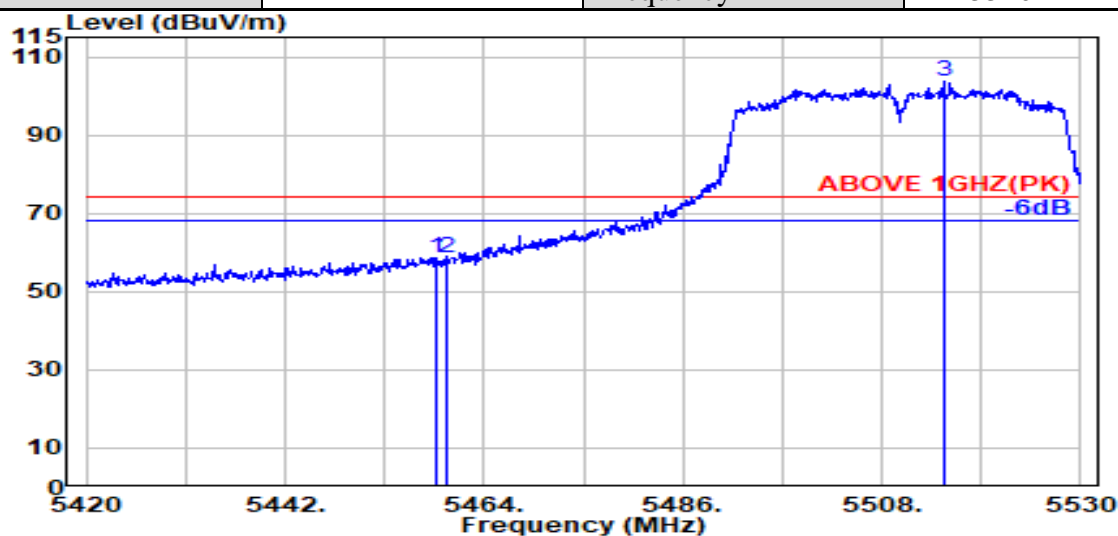

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.600	34.02	8.73	39.25	55.27	58.76	74.00	15.24	Peak
5460.000	34.02	8.73	39.25	54.90	58.40	74.00	15.60	Peak
@ 5514.900	34.07	8.76	39.25	100.15	103.73	---	---	Peak

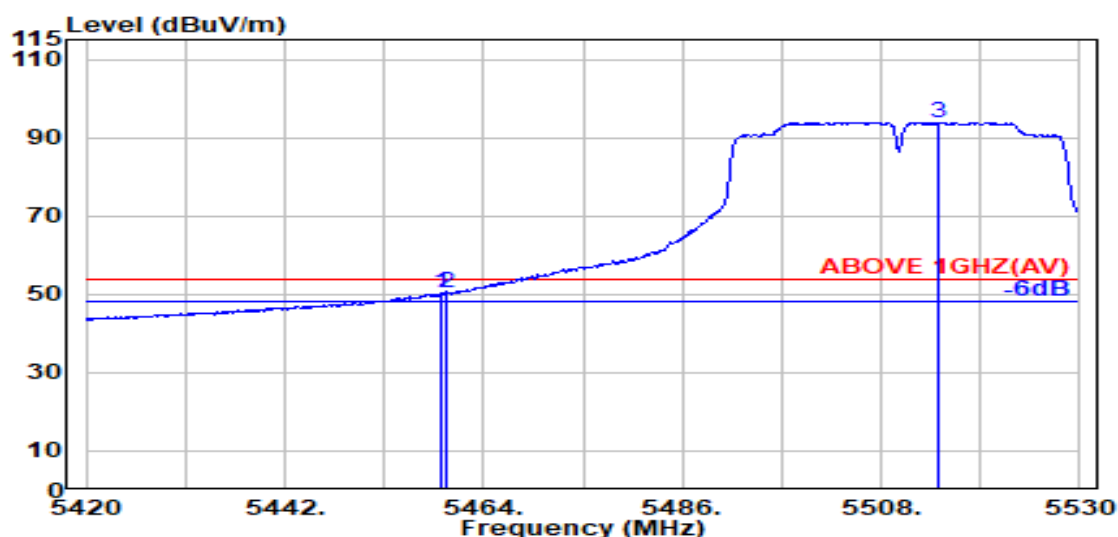

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.400	34.02	8.73	39.25	46.86	50.36	54.00	3.64	Average
5460.000	34.02	8.73	39.25	46.83	50.33	54.00	3.67	Average
@ 5514.400	34.07	8.76	39.25	90.36	93.94	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

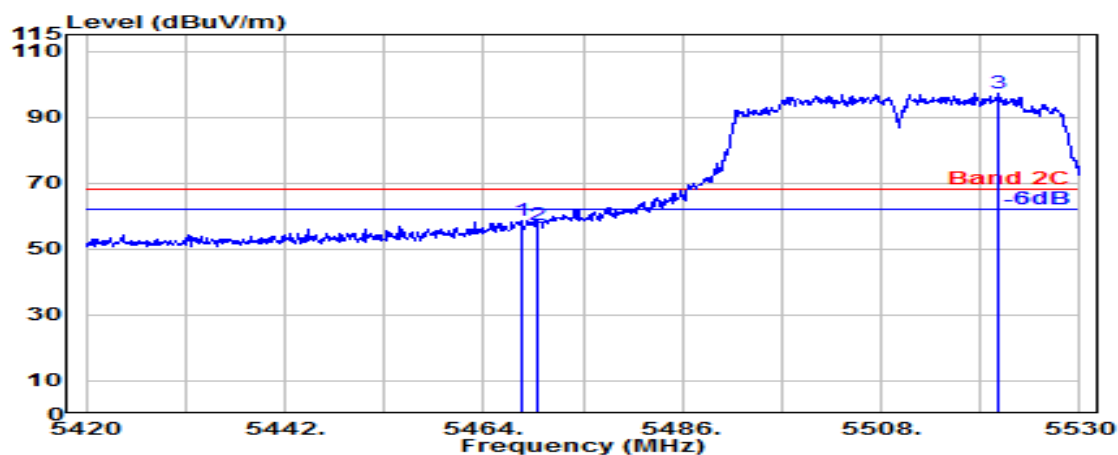

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.73	39.25	55.18	58.69	68.20	9.51	Peak
5470.000	34.04	8.74	39.25	53.93	57.45	68.20	10.75	Peak
@ 5520.900	34.06	8.77	39.25	93.84	97.41	---	---	Peak

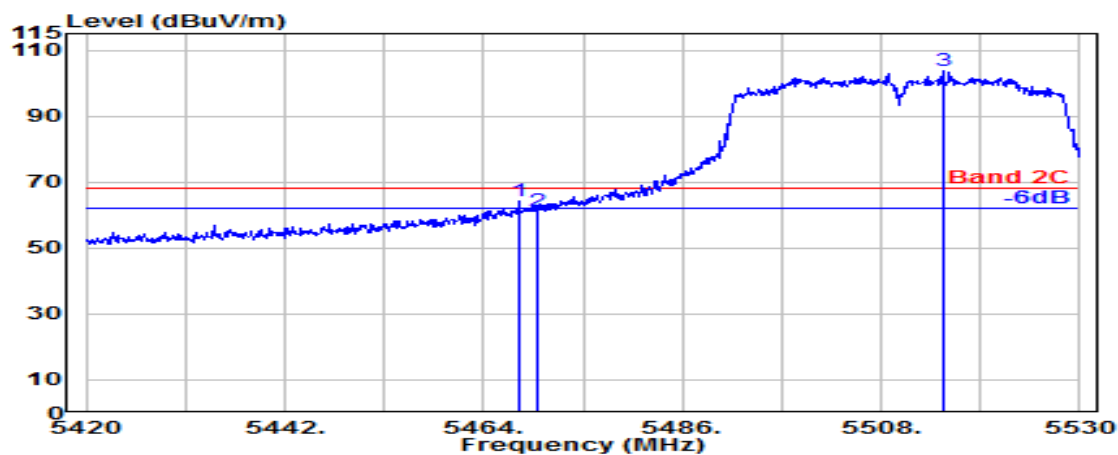

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.73	39.25	60.85	64.37	68.20	3.83	Peak
5470.000	34.04	8.74	39.25	57.88	61.40	68.20	6.80	Peak
@ 5514.900	34.07	8.76	39.25	100.15	103.73	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

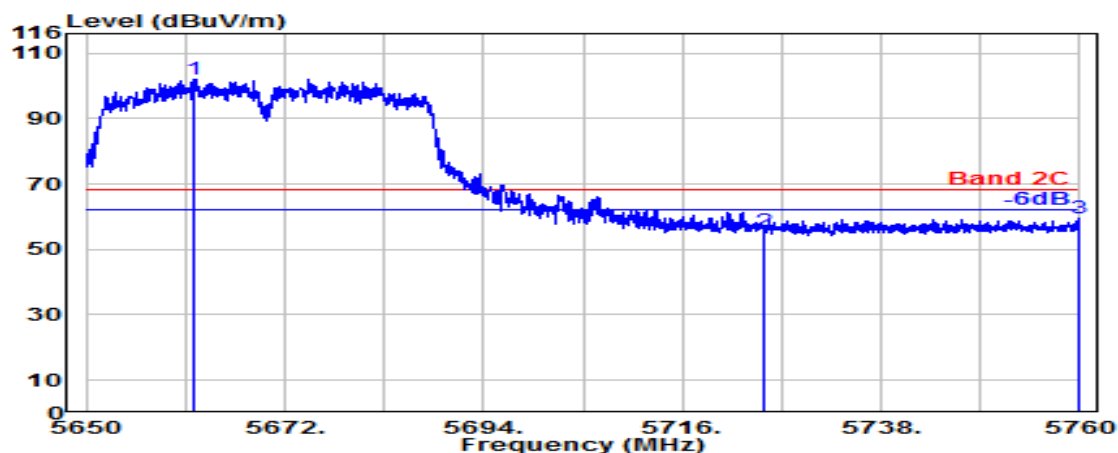

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5662.037	33.78	8.85	39.28	98.66	102.00	---	---	Peak
5725.000	33.70	8.88	39.29	52.11	55.40	68.20	12.80	Peak
5759.780	33.74	8.90	39.30	56.00	59.34	68.20	8.86	Peak

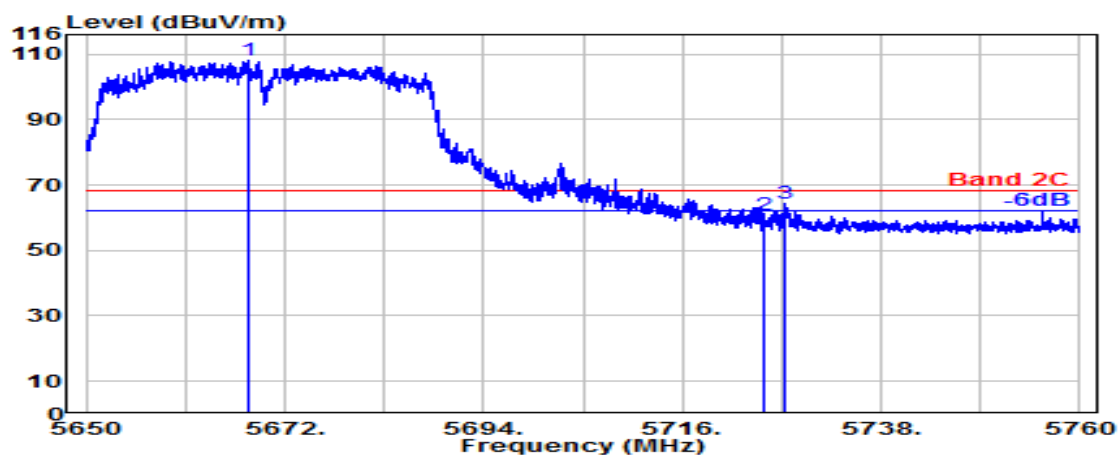

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5668.040	33.76	8.85	39.28	104.65	107.98	---	---	Peak
5725.000	33.70	8.88	39.29	57.49	60.78	68.20	7.42	Peak
5727.471	33.70	8.88	39.29	61.13	64.42	68.20	3.78	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

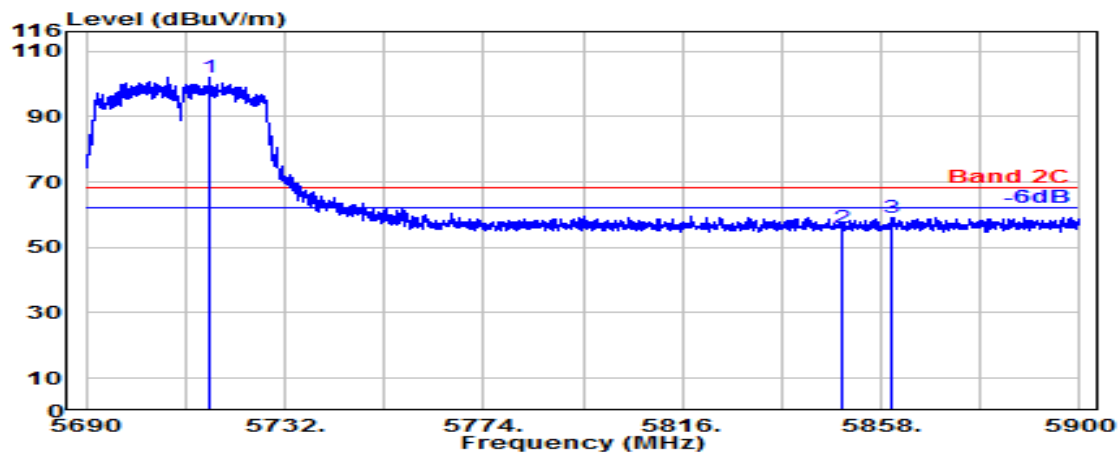

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5716.160	33.70	8.88	39.29	98.63	101.91	---	---	Peak
5850.000	34.00	8.95	39.31	52.28	55.91	68.20	12.29	Peak
5860.460	34.02	8.96	39.32	55.58	59.24	68.20	8.96	Peak

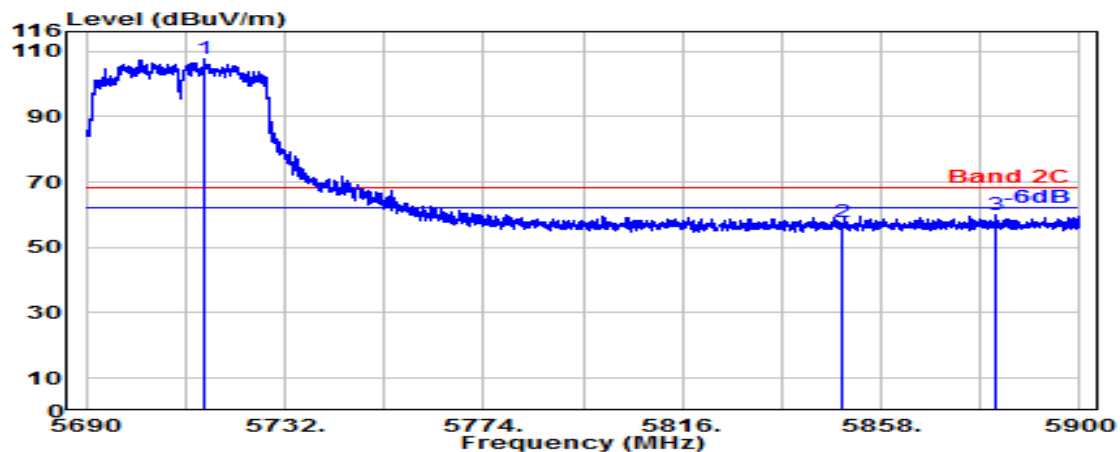

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5715.140	33.70	8.88	39.29	104.20	107.49	---	---	Peak
5850.000	34.00	8.95	39.31	54.21	57.85	68.20	10.35	Peak
5882.120	34.06	8.97	39.32	56.19	59.91	68.20	8.29	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

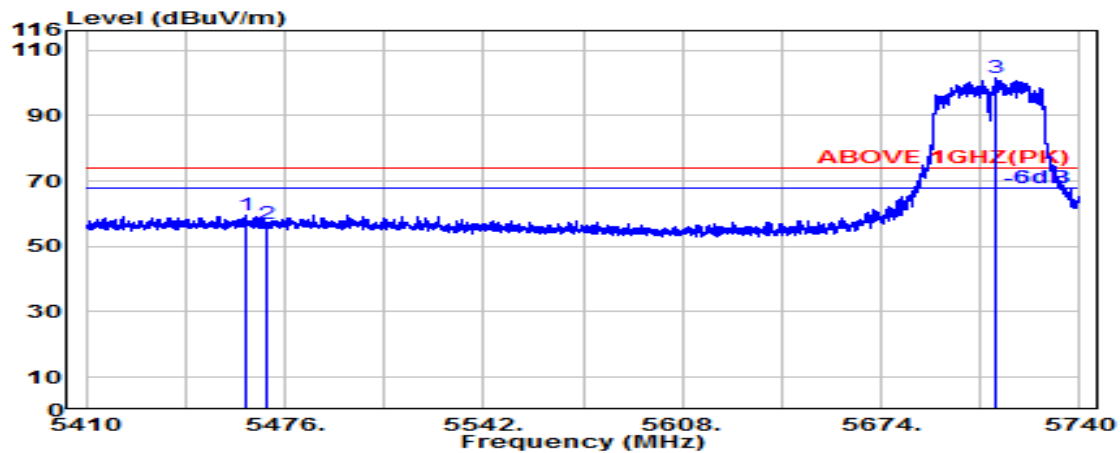

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.271	34.03	8.73	39.25	56.12	59.63	74.00	14.37	Peak
5470.000	34.04	8.74	39.25	53.35	56.88	74.00	17.12	Peak
@ 5711.809	33.70	8.87	39.29	98.08	101.37	---	---	Peak

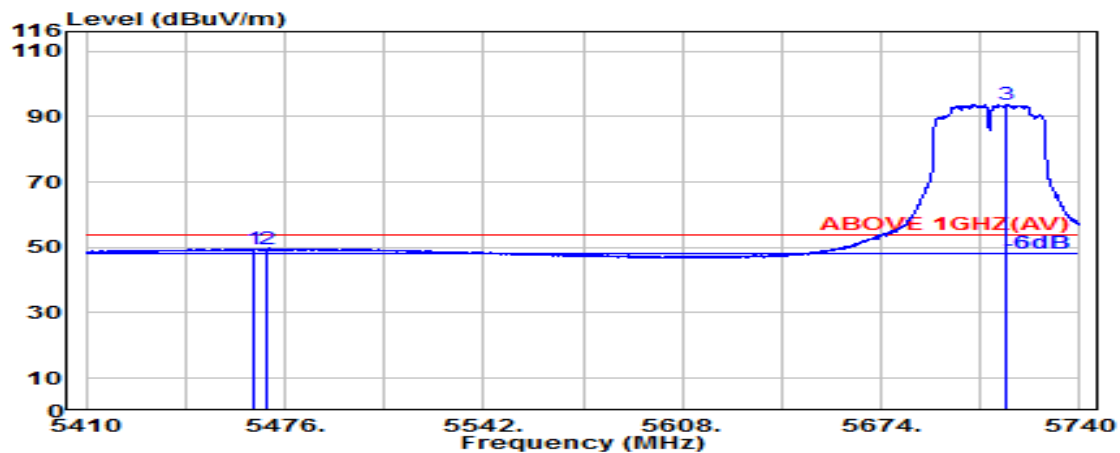

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.628	34.03	8.73	39.25	46.14	49.65	54.00	4.35	Average
5470.000	34.04	8.74	39.25	45.76	49.29	54.00	4.71	Average
@ 5715.863	33.70	8.88	39.29	90.58	93.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

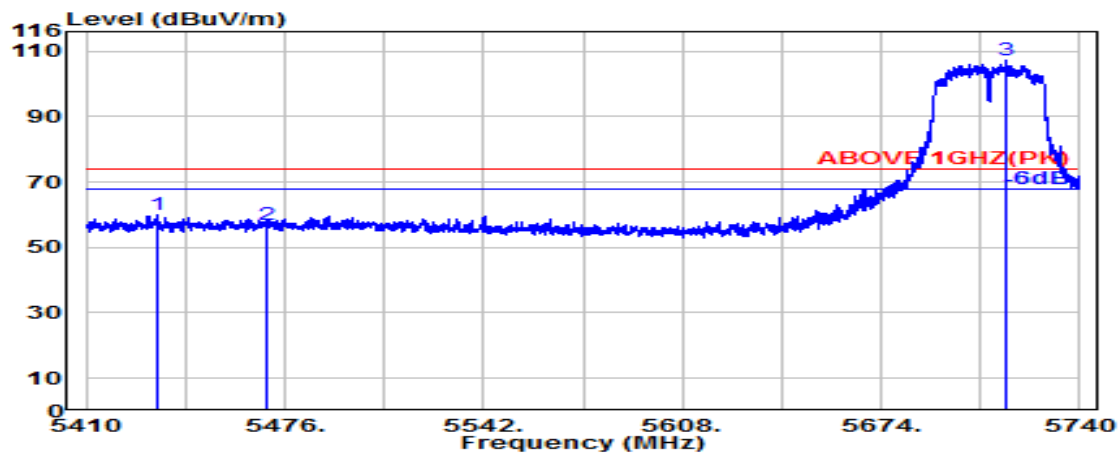

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.949	33.97	8.71	39.25	56.50	59.93	74.00	14.07	Peak
5470.000	34.04	8.74	39.25	53.31	56.83	74.00	17.17	Peak
@ 5715.392	33.70	8.88	39.29	103.86	107.14	---	---	Peak

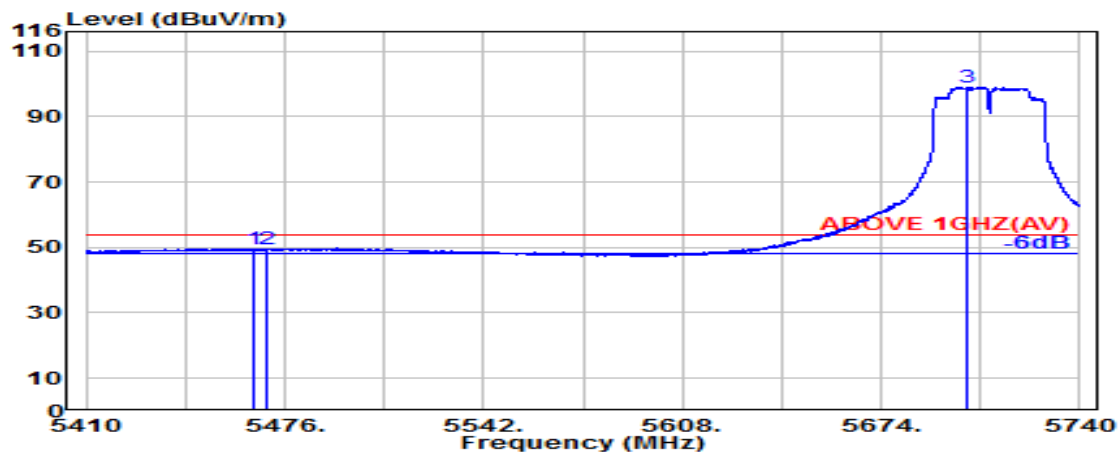

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.817	34.03	8.73	39.25	46.12	49.64	54.00	4.36	Average
5470.000	34.04	8.74	39.25	45.89	49.41	54.00	4.59	Average
@ 5702.852	33.70	8.87	39.29	95.73	99.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

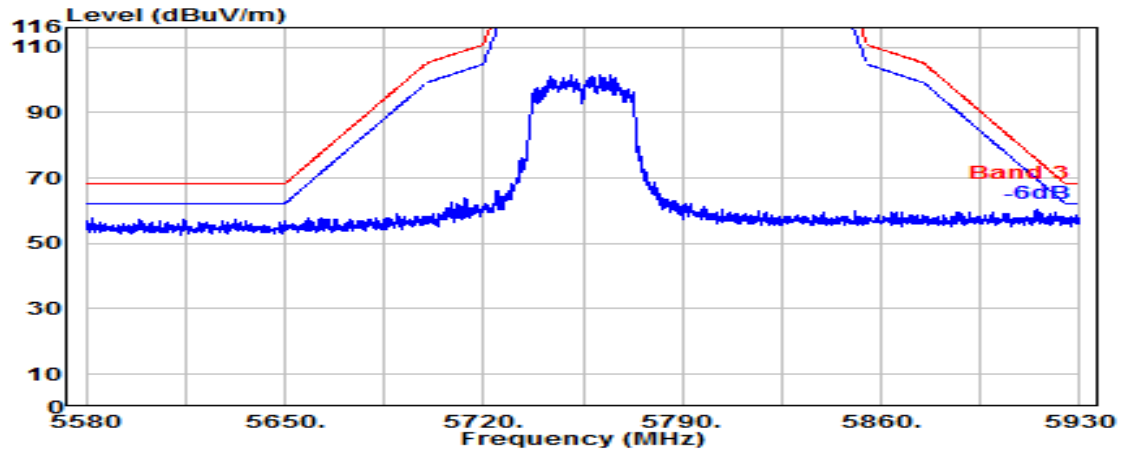

Antenna at Vertical Polarization

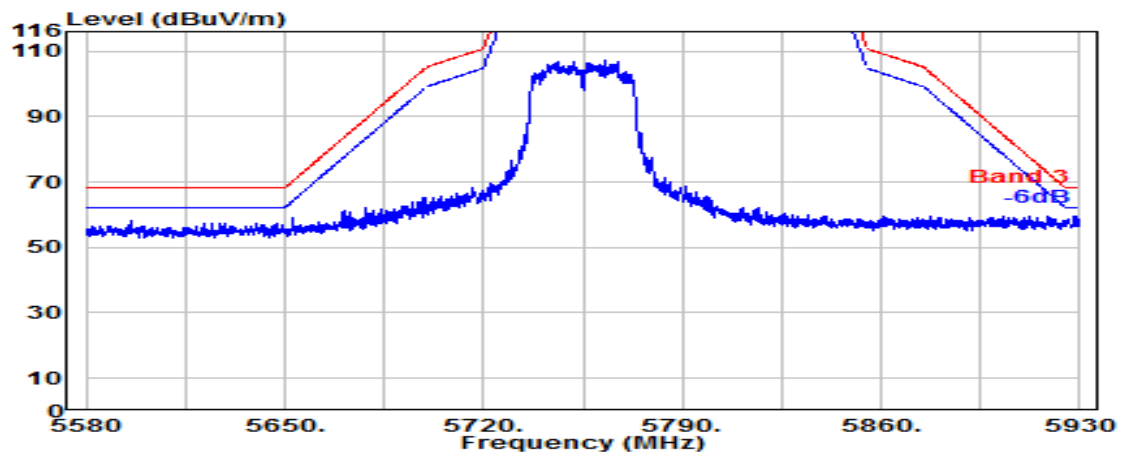


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

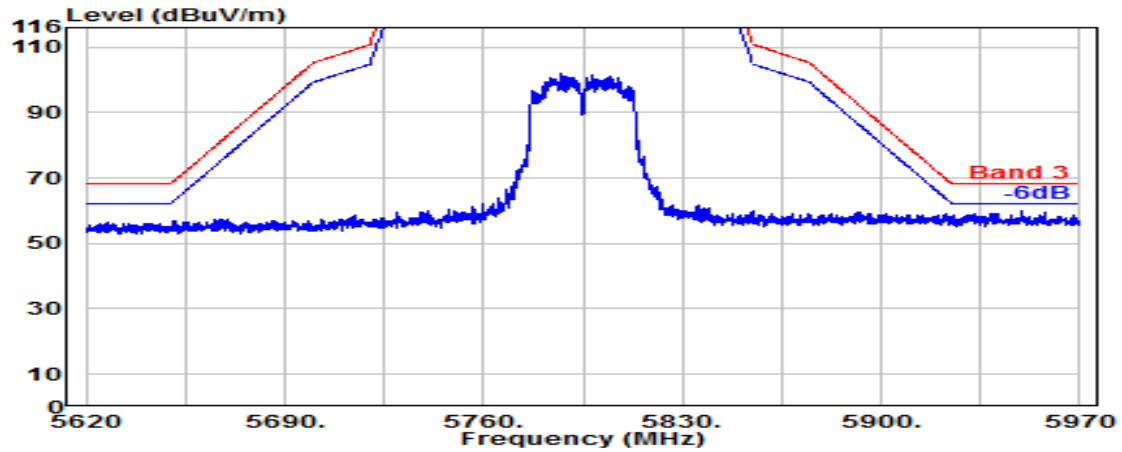

Antenna at Vertical Polarization

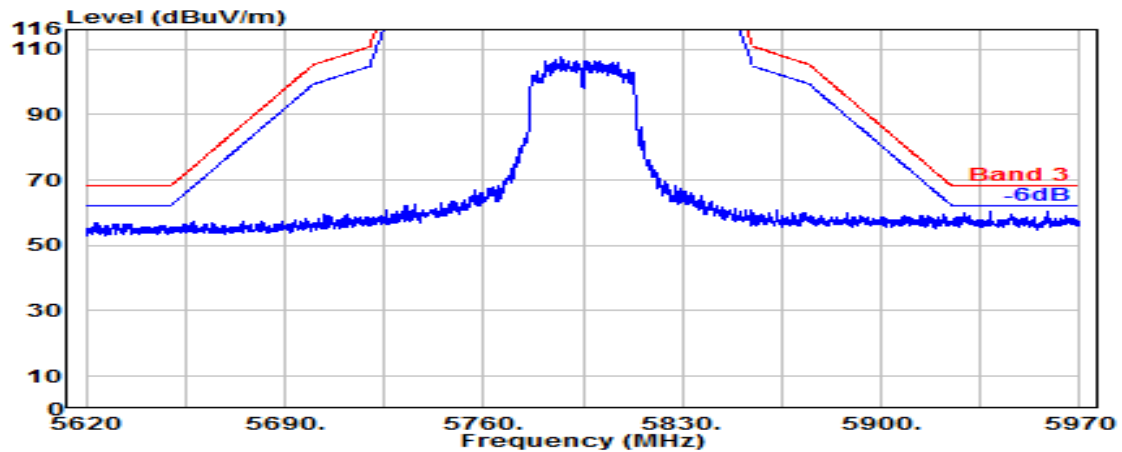


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

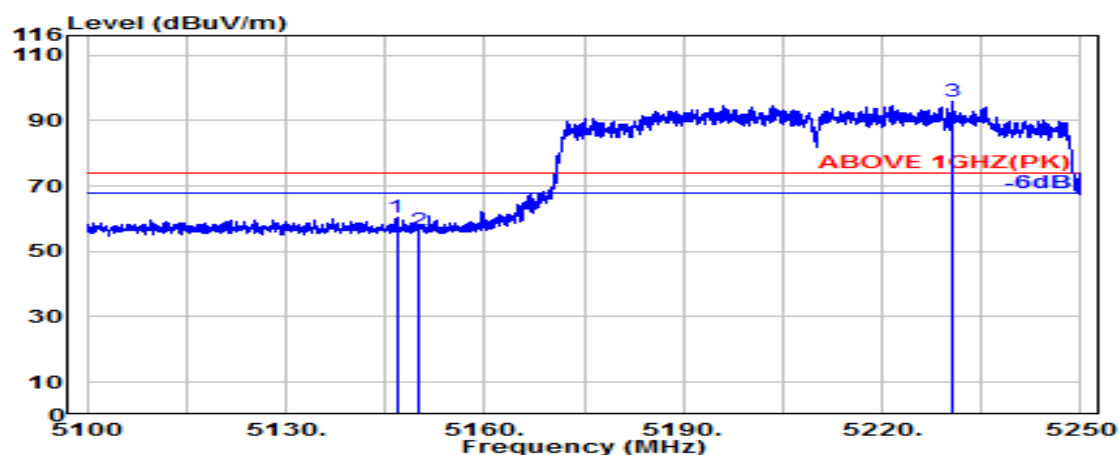

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.714	33.60	8.54	39.27	57.62	60.49	74.00	13.51	Peak
5150.000	33.60	8.54	39.27	53.46	56.33	74.00	17.67	Peak
@ 5230.628	33.70	8.59	39.27	92.90	95.92	---	---	Peak

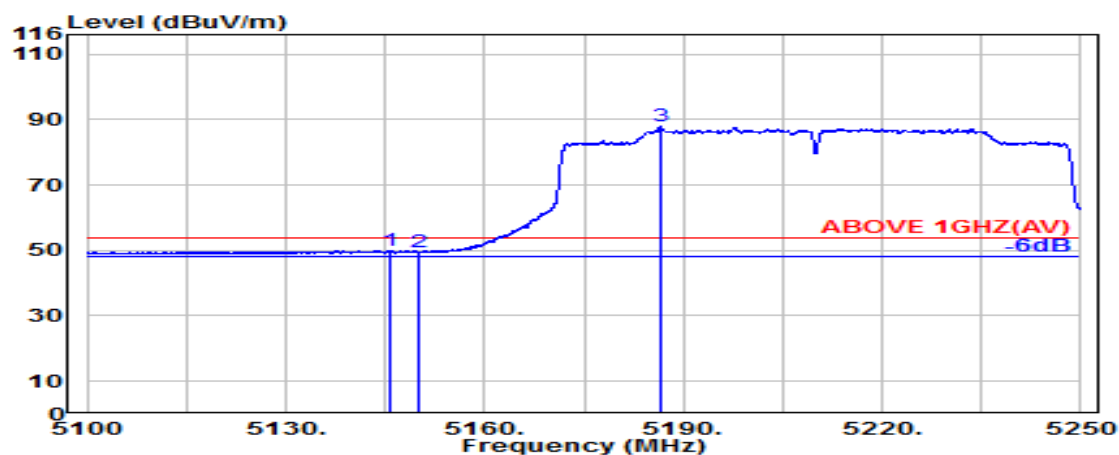


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.814	33.60	8.54	39.27	47.21	50.08	54.00	3.92	Average
5150.000	33.60	8.54	39.27	46.69	49.57	54.00	4.43	Average
@ 5186.529	33.67	8.57	39.27	84.94	87.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

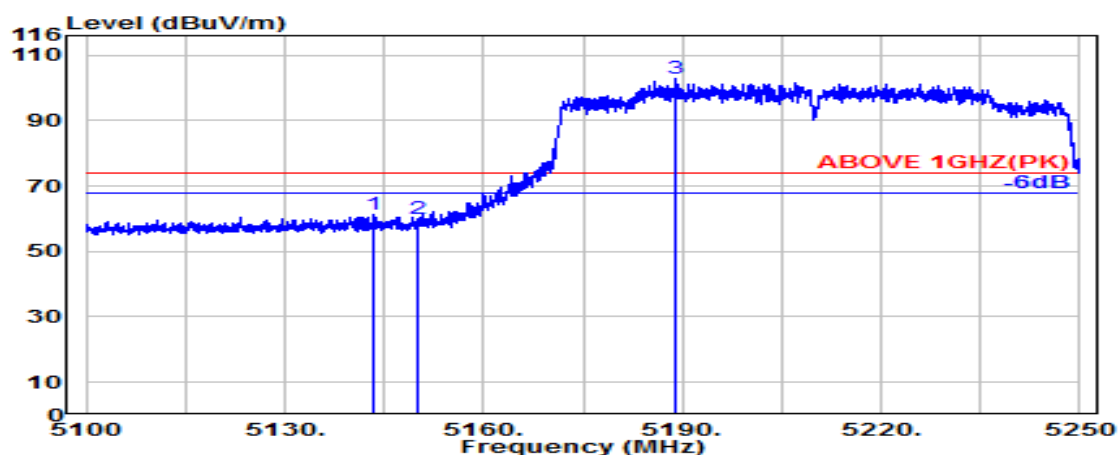

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.414	33.60	8.54	39.27	58.34	61.21	74.00	12.79	Peak
5150.000	33.60	8.54	39.27	56.91	59.78	74.00	14.22	Peak
@ 5189.100	33.68	8.57	39.27	99.98	102.96	---	---	Peak

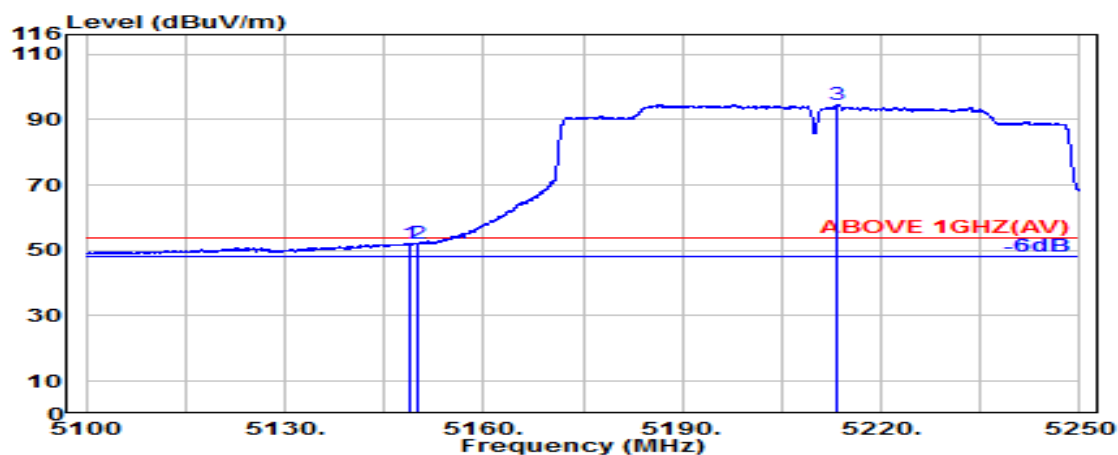


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.986	33.60	8.54	39.27	49.31	52.19	54.00	1.81	Average
5150.014	33.60	8.54	39.27	49.12	51.99	54.00	2.01	Average
@ 5213.357	33.70	8.58	39.27	91.64	94.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

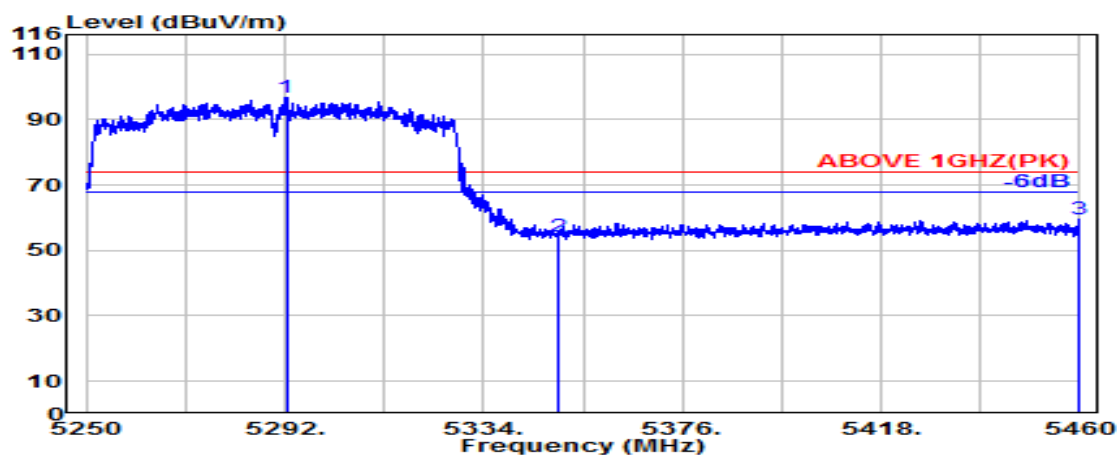

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.300	33.95	8.63	39.26	93.46	96.78	---	---	Peak
5350.000	33.90	8.67	39.26	50.93	54.23	74.00	19.77	Peak
5459.640	34.02	8.73	39.25	56.10	59.60	74.00	14.40	Peak

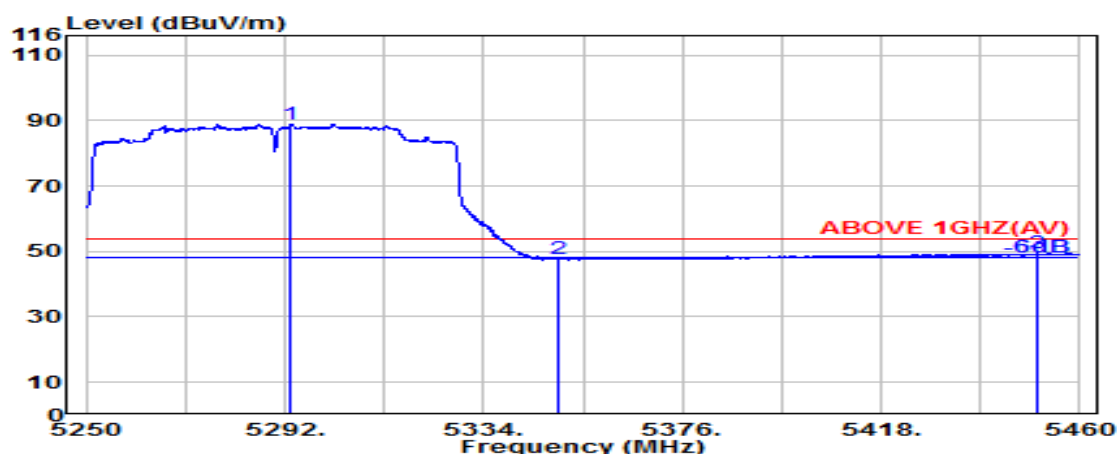


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.320	33.96	8.63	39.26	85.55	88.88	---	---	Average
5350.000	33.90	8.67	39.26	44.54	47.85	54.00	6.15	Average
5450.940	34.00	8.72	39.25	45.97	49.45	54.00	4.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

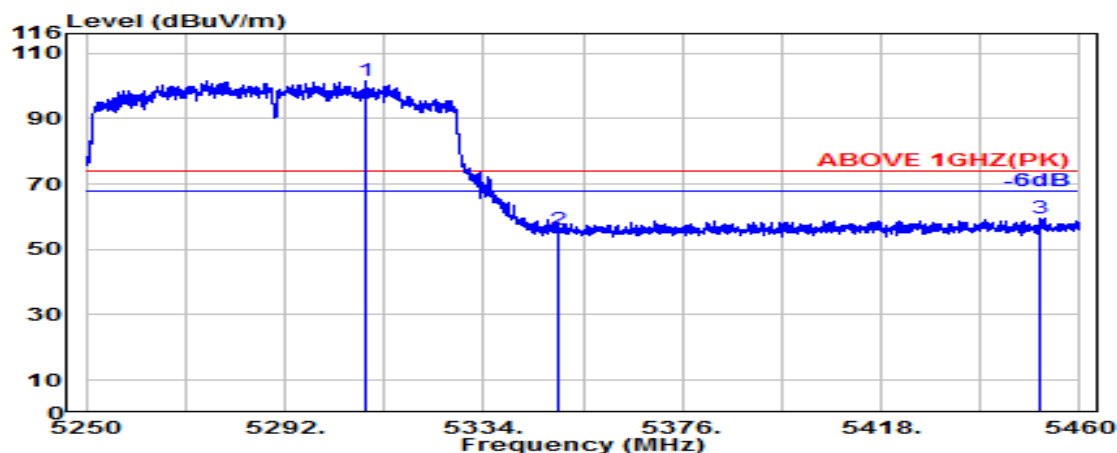

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5308.980	33.98	8.64	39.26	98.25	101.61	---	---	Peak
5350.000	33.90	8.67	39.26	52.69	56.00	74.00	18.00	Peak
5451.480	34.00	8.73	39.25	56.22	59.70	74.00	14.30	Peak

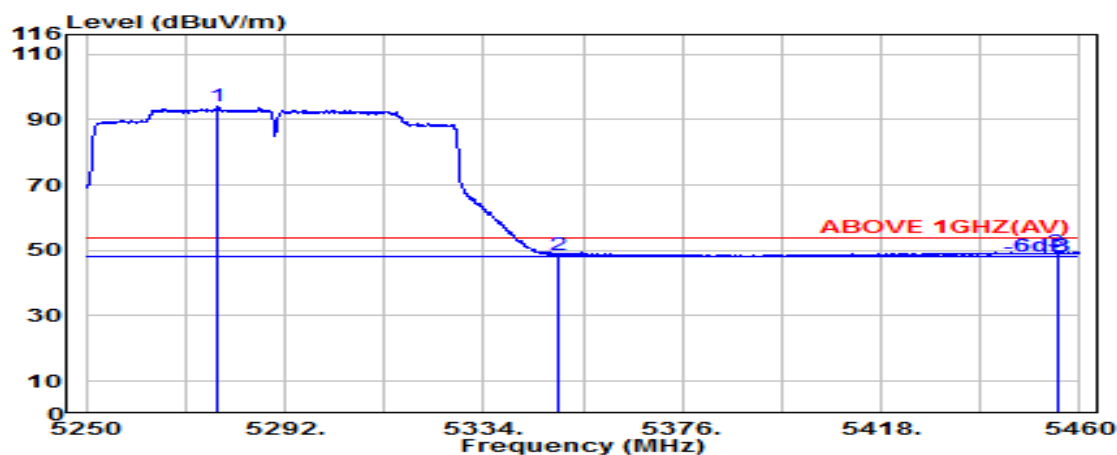

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5277.720	33.87	8.62	39.26	90.79	94.02	---	---	Average
5350.000	33.90	8.67	39.26	45.31	48.61	54.00	5.39	Average
5455.140	34.01	8.73	39.25	46.04	49.53	54.00	4.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

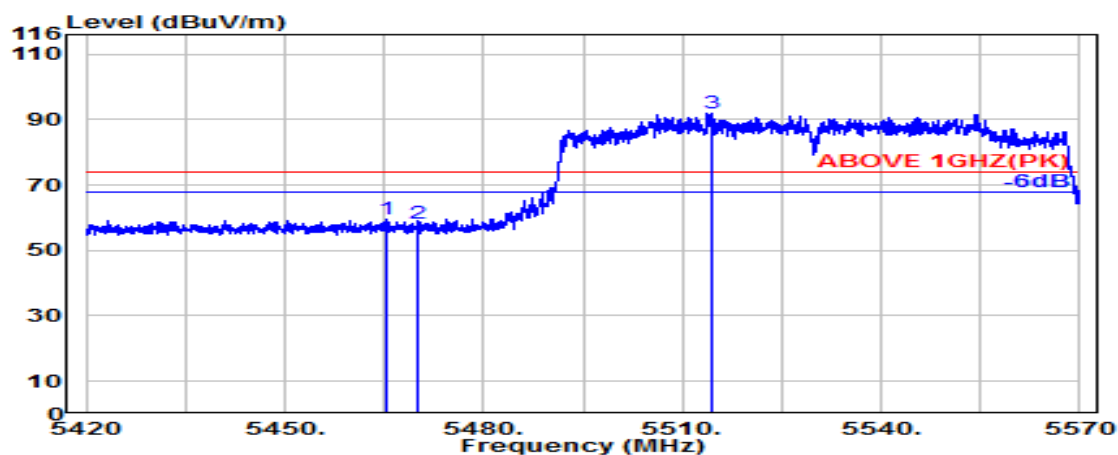

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.214	34.03	8.73	39.25	56.16	59.67	74.00	14.33	Peak
5470.000	34.04	8.74	39.25	54.63	58.16	74.00	15.84	Peak
@ 5514.286	34.07	8.76	39.25	88.40	91.98	---	---	Peak

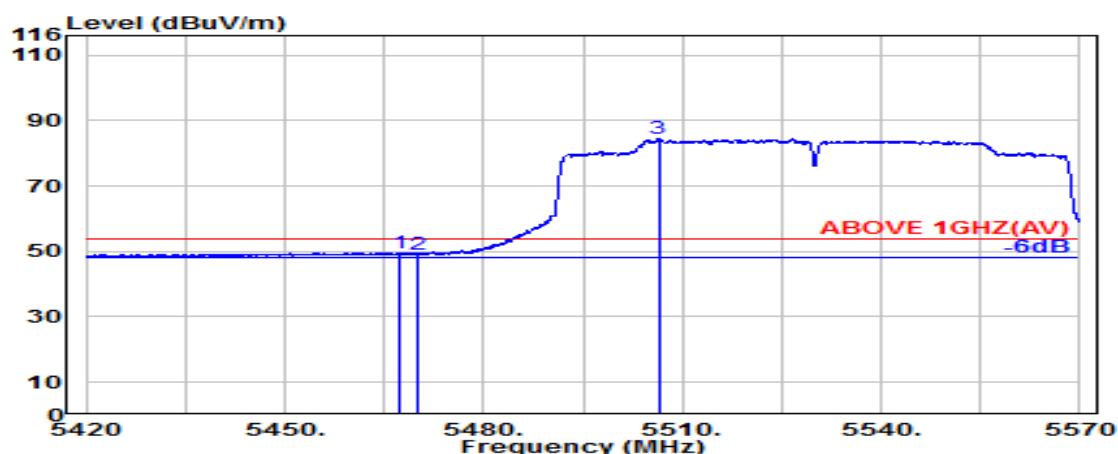

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.443	34.03	8.73	39.25	46.16	49.68	54.00	4.32	Average
5470.000	34.04	8.74	39.25	45.64	49.16	54.00	4.84	Average
@ 5506.400	34.09	8.76	39.25	80.78	84.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

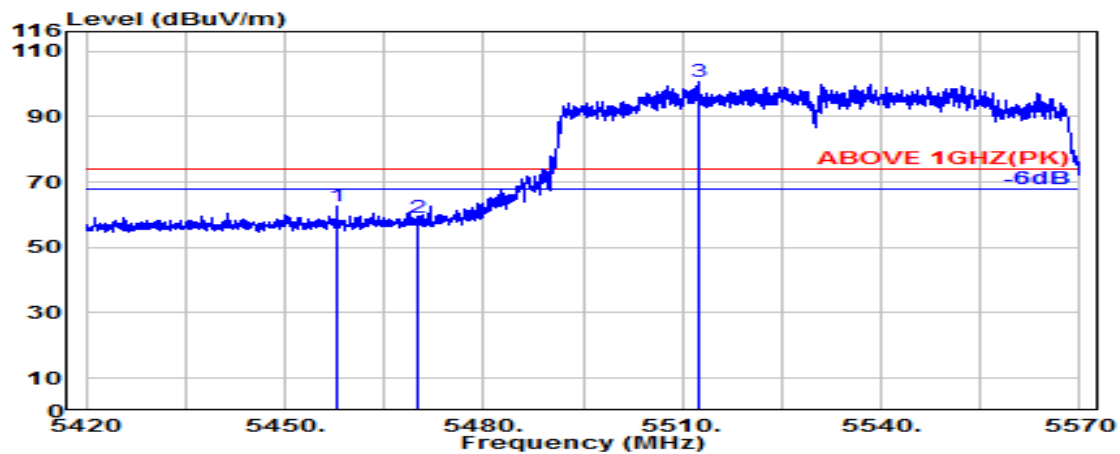

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.971	34.02	8.73	39.25	59.01	62.50	74.00	11.50	Peak
5470.000	34.04	8.74	39.25	55.45	58.97	74.00	15.03	Peak
@ 5512.486	34.07	8.76	39.25	97.12	100.70	---	---	Peak

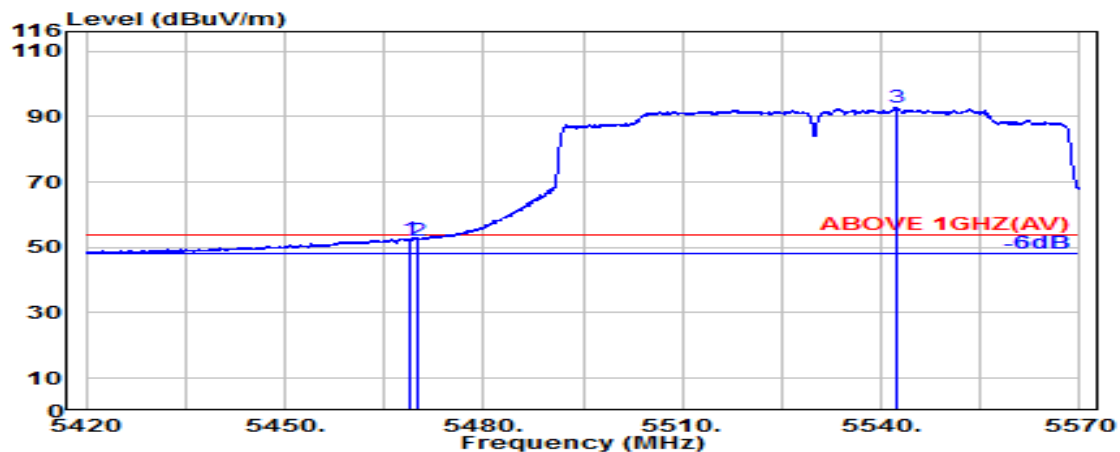

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.771	34.04	8.74	39.25	49.17	52.69	54.00	1.31	Average
5470.000	34.04	8.74	39.25	48.72	52.25	54.00	1.75	Average
@ 5542.400	34.02	8.78	39.26	89.29	92.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

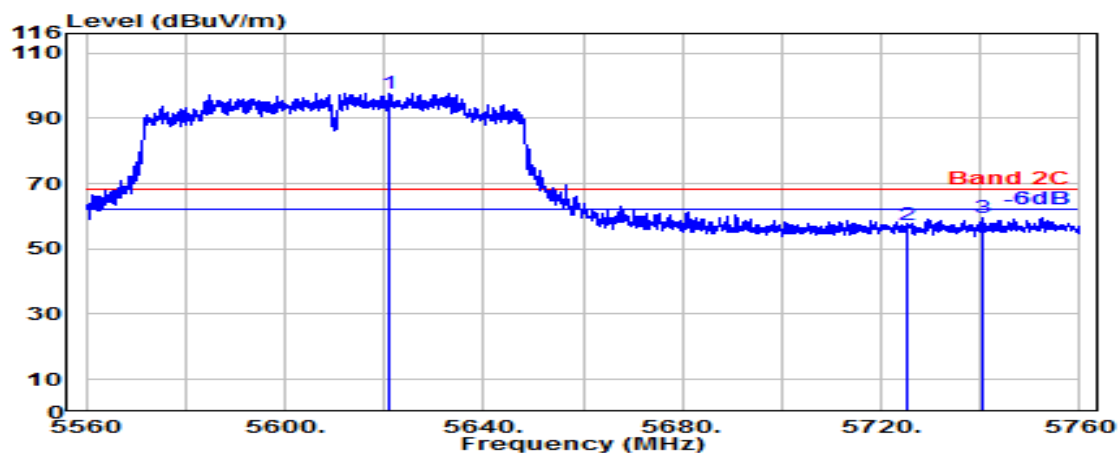

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5620.971	33.80	8.82	39.27	94.28	97.63	---	---	Peak
5725.000	33.70	8.88	39.29	54.23	57.52	68.20	10.68	Peak
5740.457	33.70	8.89	39.29	56.07	59.36	68.20	8.84	Peak

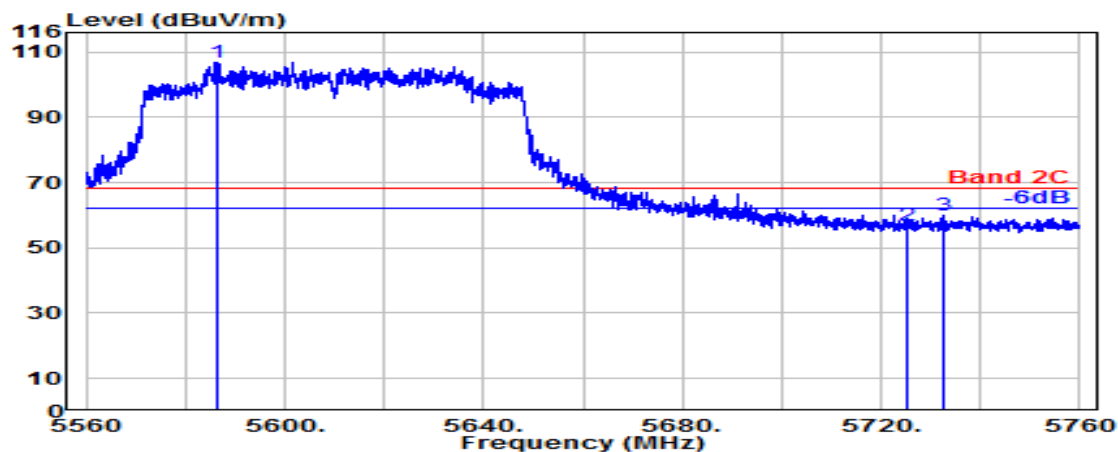


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5586.171	33.86	8.80	39.27	103.59	106.98	---	---	Peak
5725.000	33.70	8.88	39.29	53.41	56.69	68.20	11.51	Peak
5732.743	33.70	8.89	39.29	56.58	59.88	68.20	8.32	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

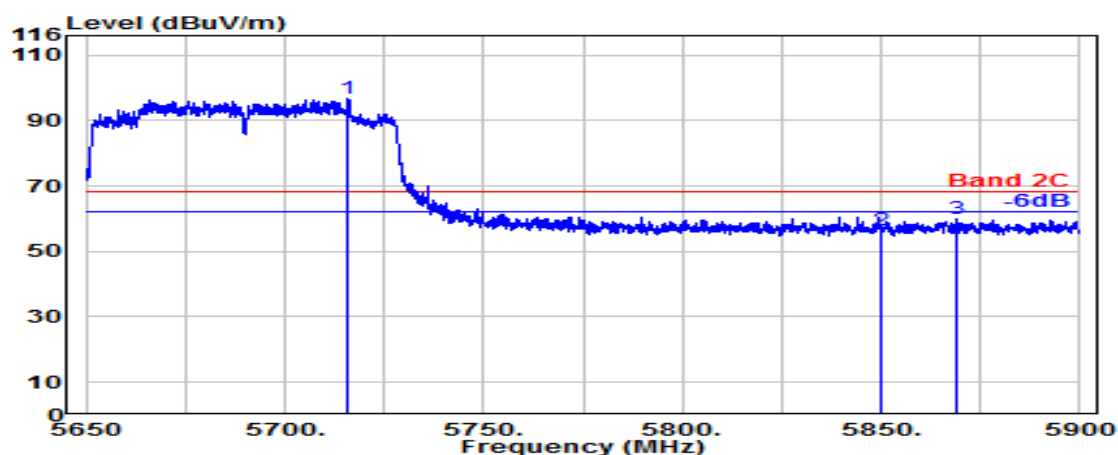

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.000	33.70	8.88	39.29	93.25	96.53	---	---	Peak
5850.000	34.00	8.95	39.31	52.73	56.36	68.20	11.84	Peak
5869.071	34.04	8.96	39.32	56.11	59.79	68.20	8.41	Peak

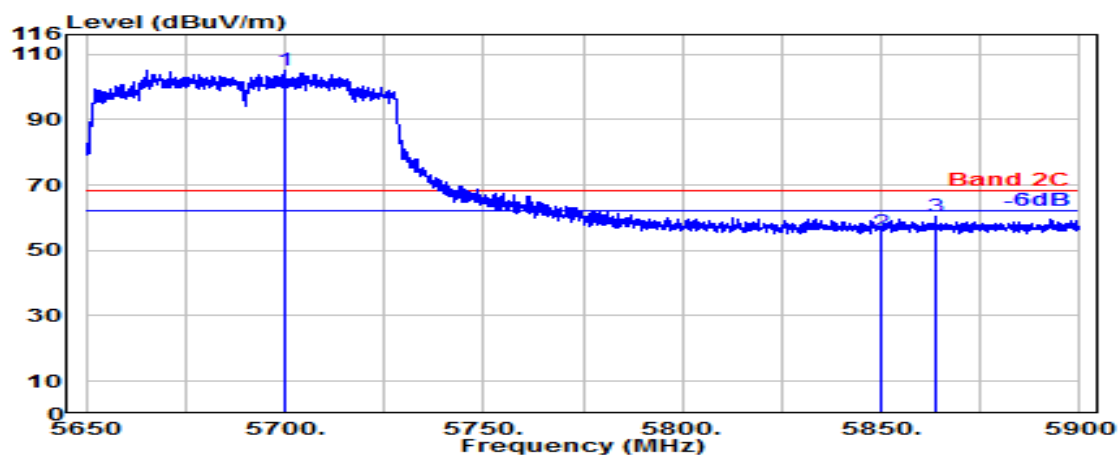

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.786	33.70	8.87	39.29	101.65	104.93	---	---	Peak
5850.000	34.00	8.95	39.31	52.13	55.77	68.20	12.43	Peak
5863.571	34.03	8.96	39.32	56.56	60.23	68.20	7.97	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

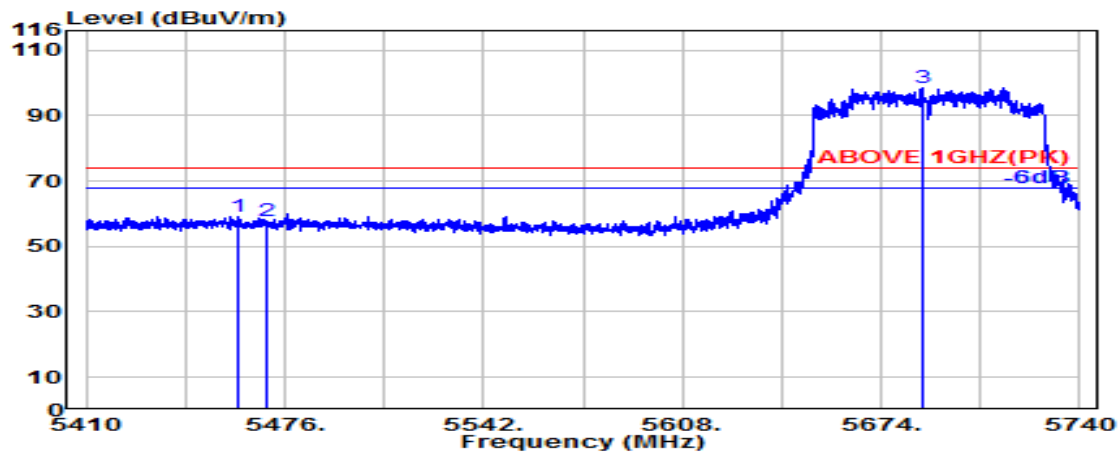

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.443	34.02	8.73	39.25	55.75	59.25	74.00	14.75	Peak
5470.000	34.04	8.74	39.25	54.11	57.64	74.00	16.36	Peak
@ 5687.483	33.72	8.86	39.28	95.38	98.68	---	---	Peak

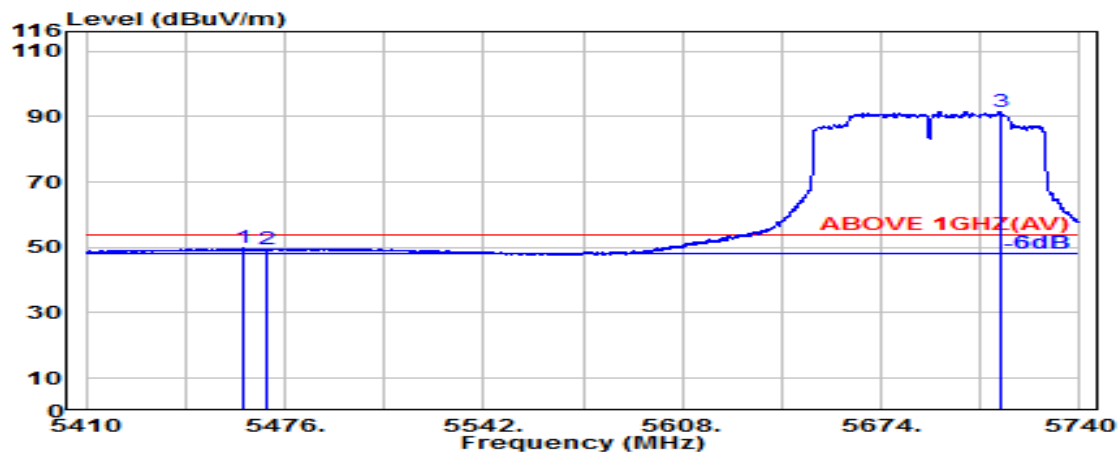

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.517	34.03	8.73	39.25	46.24	49.74	54.00	4.26	Average
5470.000	34.04	8.74	39.25	45.83	49.35	54.00	4.65	Average
@ 5713.600	33.70	8.87	39.29	88.36	91.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

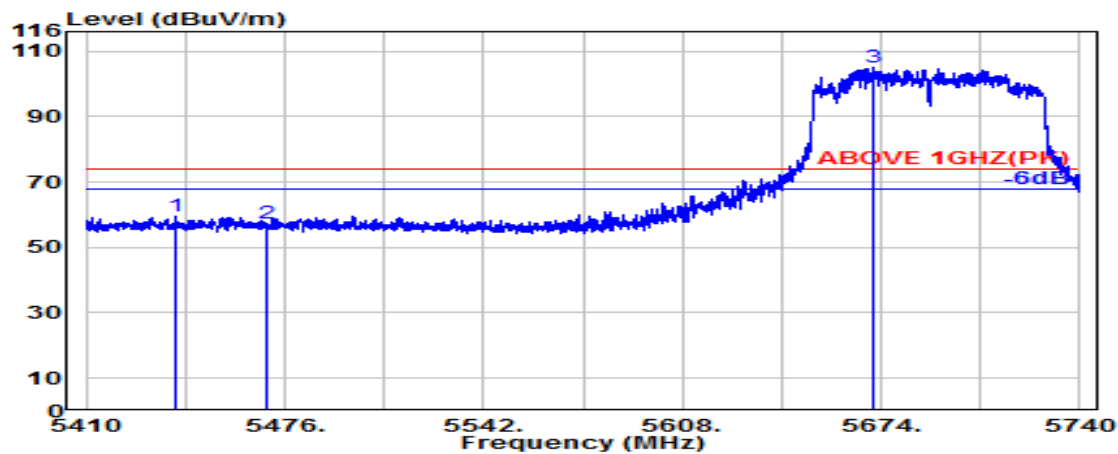

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.511	33.98	8.72	39.25	56.23	59.67	74.00	14.33	Peak
5470.000	34.04	8.74	39.25	53.93	57.46	74.00	16.54	Peak
@ 5671.643	33.76	8.85	39.28	101.56	104.89	---	---	Peak

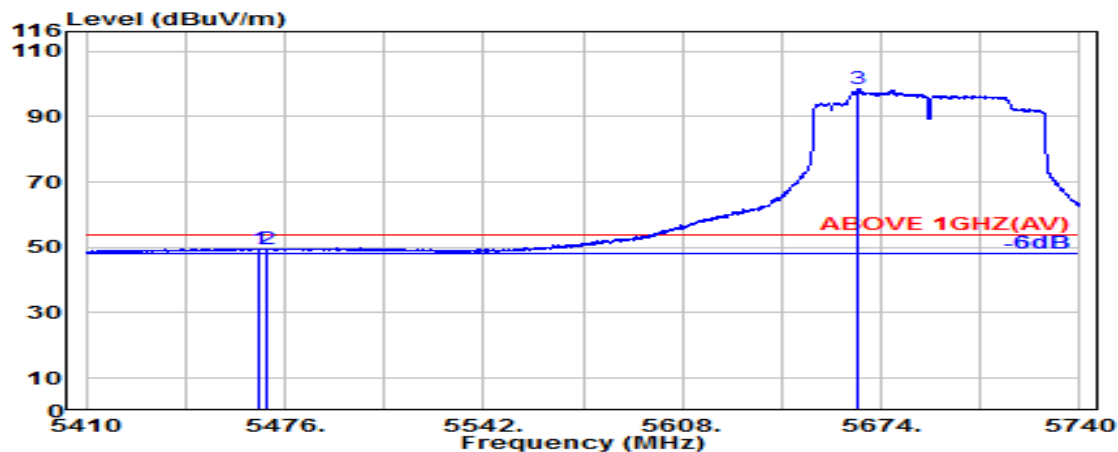

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.137	34.03	8.73	39.25	46.08	49.60	54.00	4.40	Average
5470.000	34.04	8.74	39.25	46.07	49.60	54.00	4.40	Average
@ 5666.551	33.77	8.85	39.28	95.10	98.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

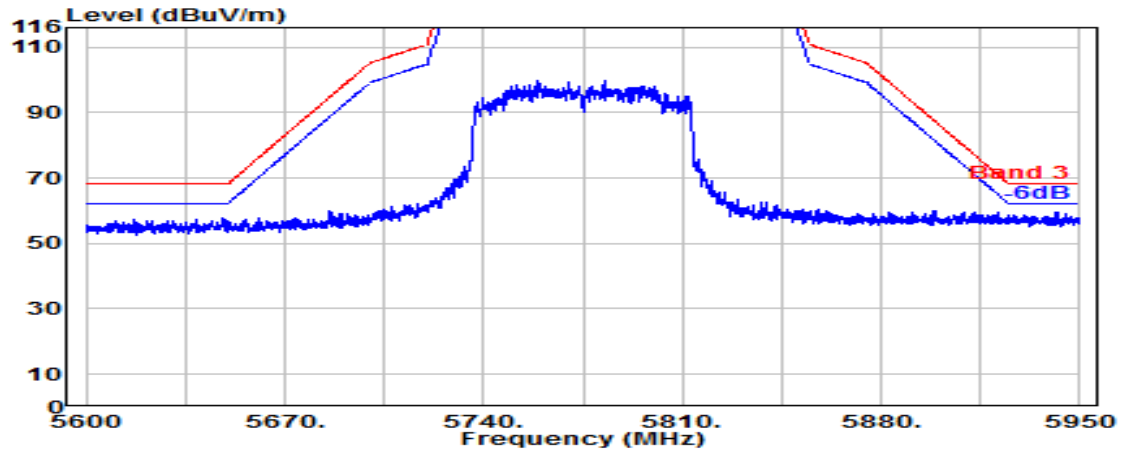


Antenna at Vertical Polarization

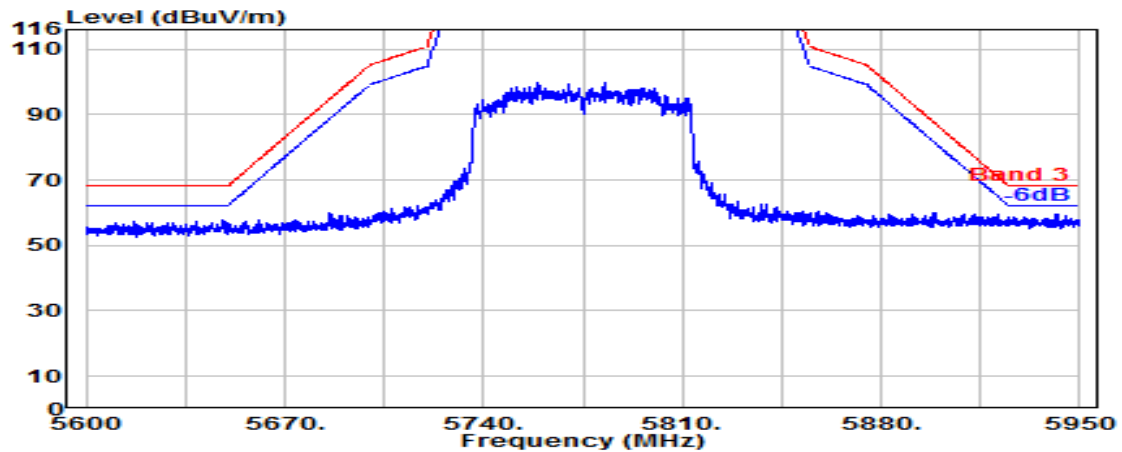

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

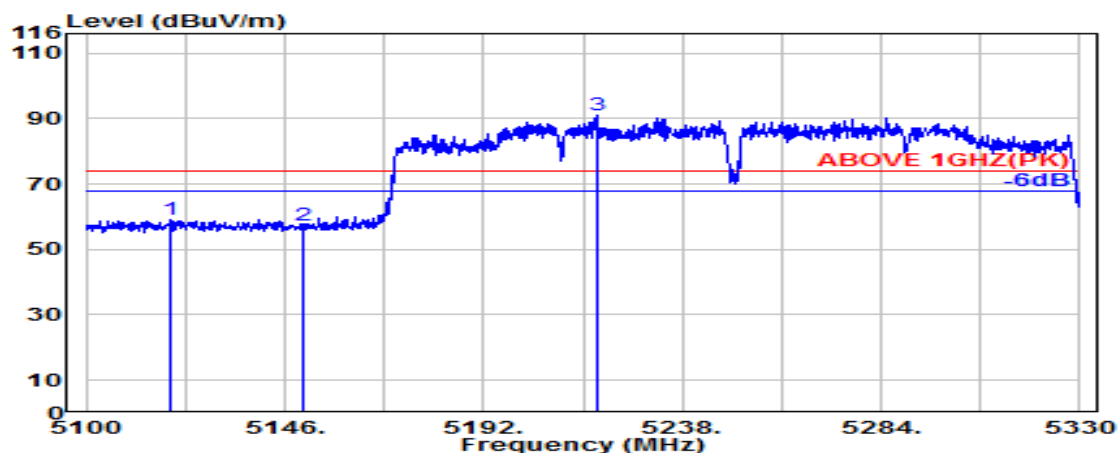

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.600	33.60	8.53	39.27	56.19	59.04	74.00	14.96	Peak
5150.000	33.60	8.54	39.27	54.49	57.36	74.00	16.64	Peak
@ 5218.300	33.70	8.59	39.27	87.91	90.93	---	---	Peak

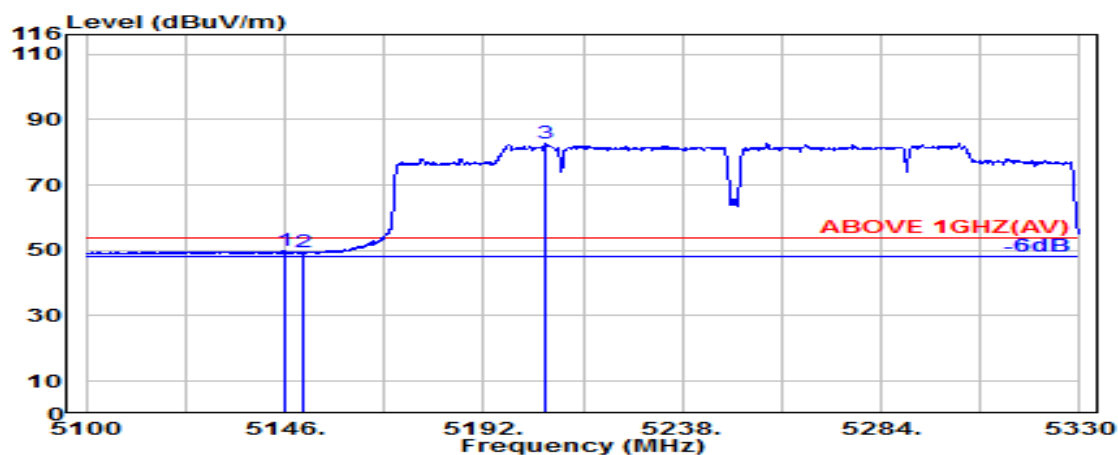


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.800	33.60	8.54	39.27	46.92	49.79	54.00	4.21	Average
5150.000	33.60	8.54	39.27	46.53	49.40	54.00	4.60	Average
@ 5206.400	33.70	8.58	39.27	79.54	82.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

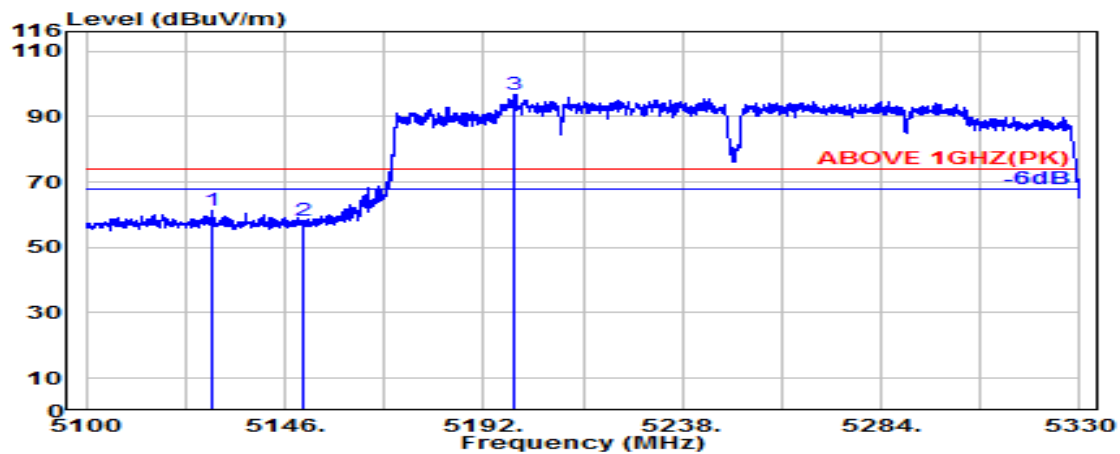

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.300	33.60	8.53	39.27	58.35	61.21	74.00	12.79	Peak
5150.000	33.60	8.54	39.27	55.45	58.32	74.00	15.68	Peak
@ 5199.300	33.70	8.57	39.27	93.69	96.69	---	---	Peak

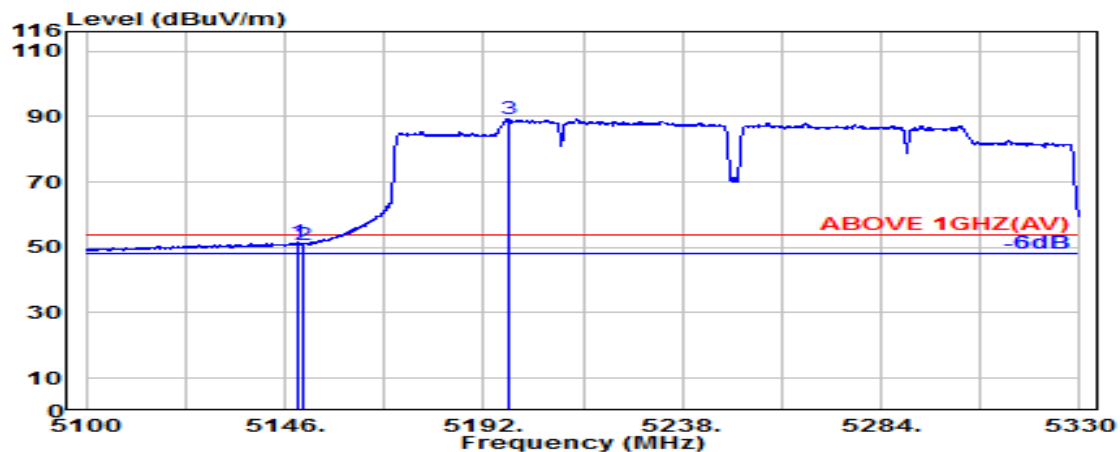


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.60	8.54	39.27	48.58	51.45	54.00	2.55	Average
5150.000	33.60	8.54	39.27	48.05	50.92	54.00	3.08	Average
@ 5197.700	33.70	8.57	39.27	86.35	89.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

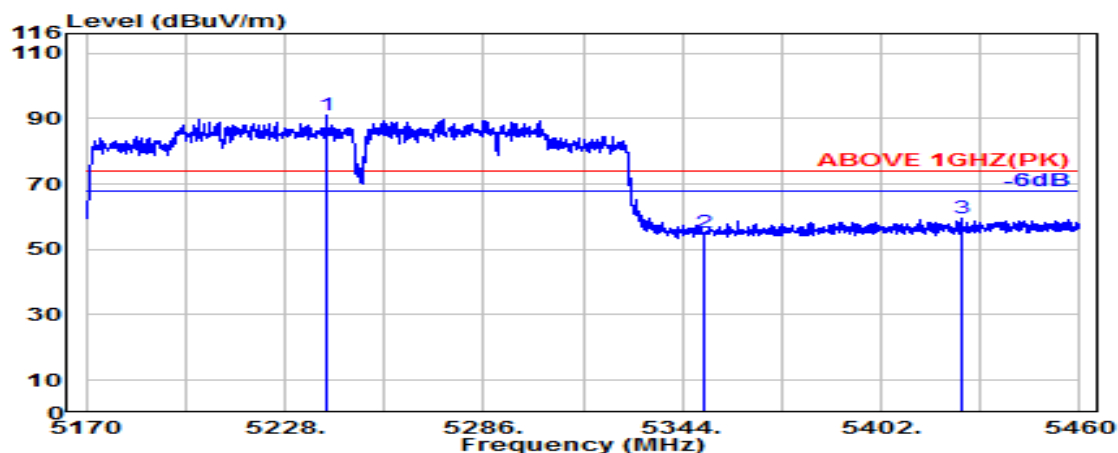

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5240.000	33.70	8.60	39.27	87.89	90.92	---	---	Peak
	5350.000	33.90	8.67	39.26	51.82	55.13	74.00	18.87	Peak
	5425.300	33.95	8.71	39.25	55.96	59.37	74.00	14.63	Peak

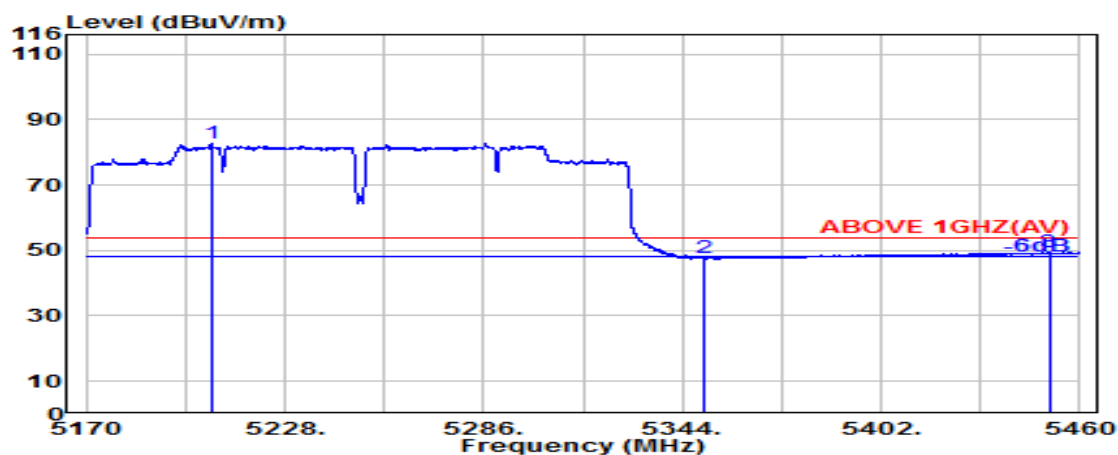

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5206.500	33.70	8.58	39.27	79.60	82.62	---	---	Average
	5350.000	33.90	8.67	39.26	44.57	47.88	54.00	6.12	Average
	5451.000	34.00	8.72	39.25	46.07	49.55	54.00	4.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

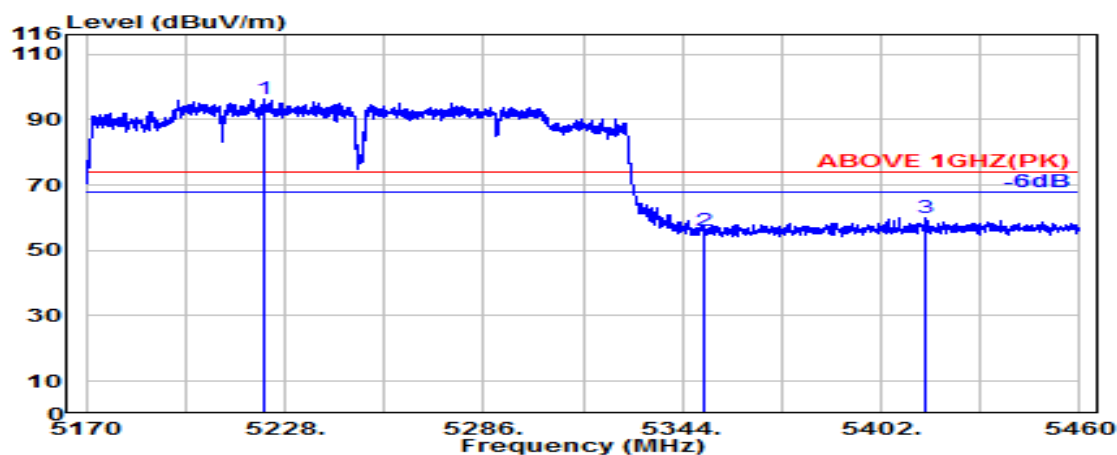

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.000	33.70	8.59	39.27	93.45	96.47	---	---	Peak
5350.000	33.90	8.67	39.26	52.74	56.05	74.00	17.95	Peak
5415.000	33.93	8.70	39.25	56.62	60.00	74.00	14.00	Peak

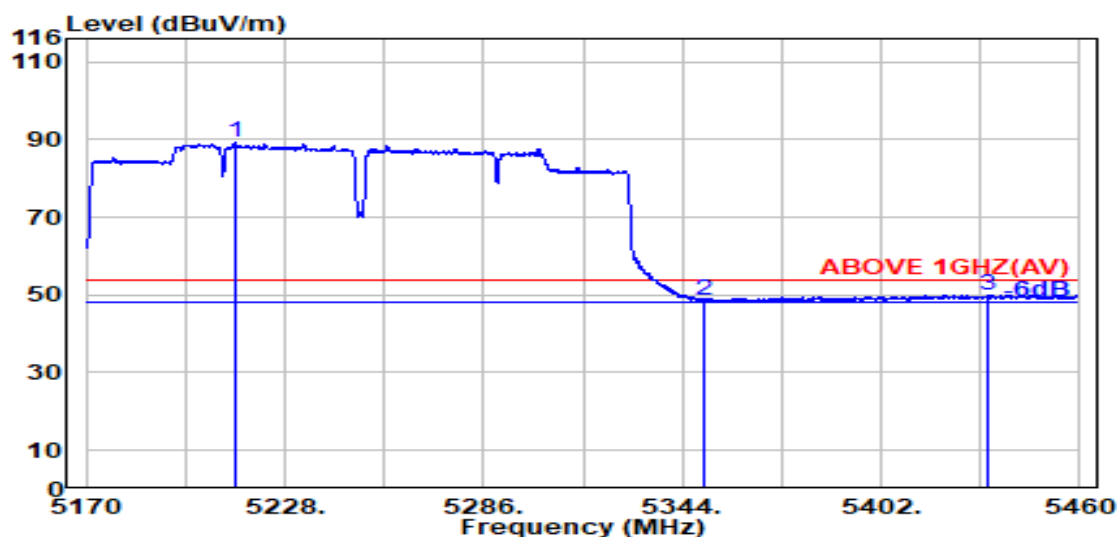


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5213.500	33.73	8.92	39.28	85.89	89.26	---	---	Average
5350.000	33.90	9.00	39.27	45.07	48.70	54.00	5.30	Average
5433.500	34.17	9.04	39.27	46.07	50.02	54.00	3.98	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

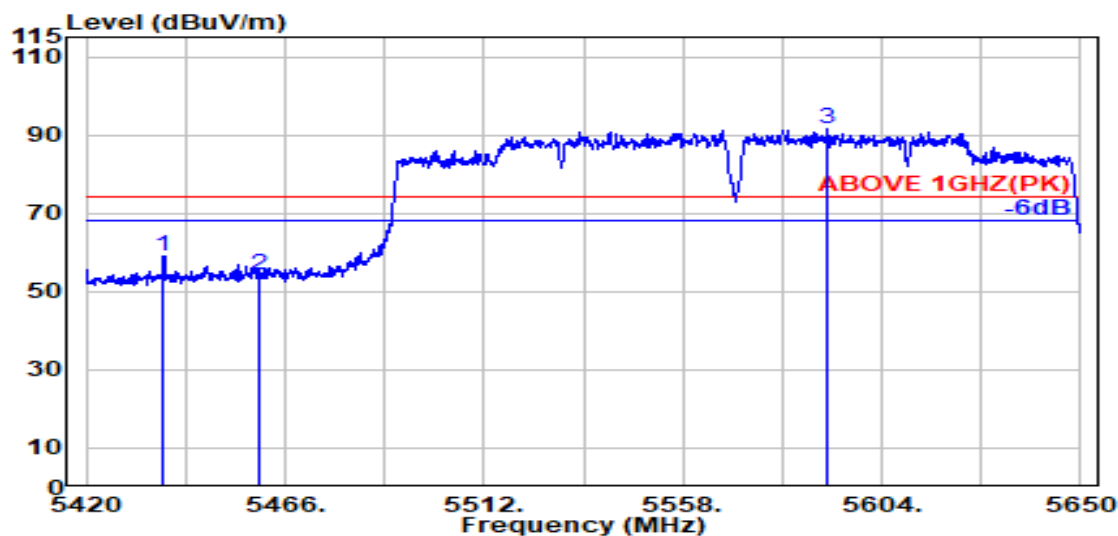

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
	5437.940	33.98	8.72	39.25	55.71	59.15	74.00	14.85	Peak
	5460.020	34.02	8.73	39.25	50.55	54.05	74.00	19.95	Peak
@	5591.427	33.83	8.81	39.27	88.33	91.71	---	---	Peak

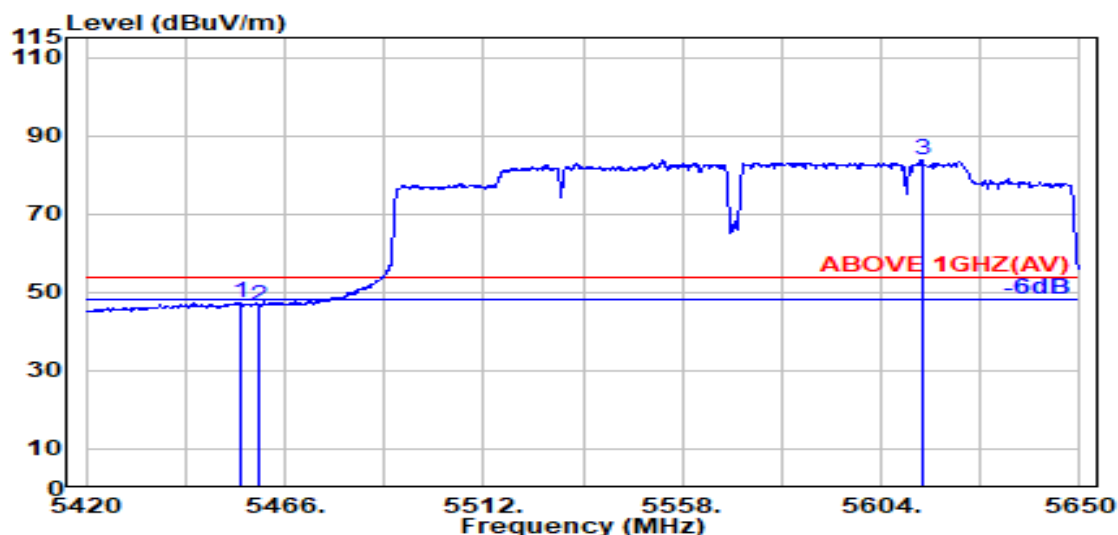

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.727	34.01	8.73	39.25	43.71	47.20	54.00	6.80	Average
5460.020	34.02	8.73	39.25	43.12	46.62	54.00	7.38	Average
@ 5613.507	33.80	8.82	39.27	80.54	83.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2306288

Report Number: EM-F230366


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

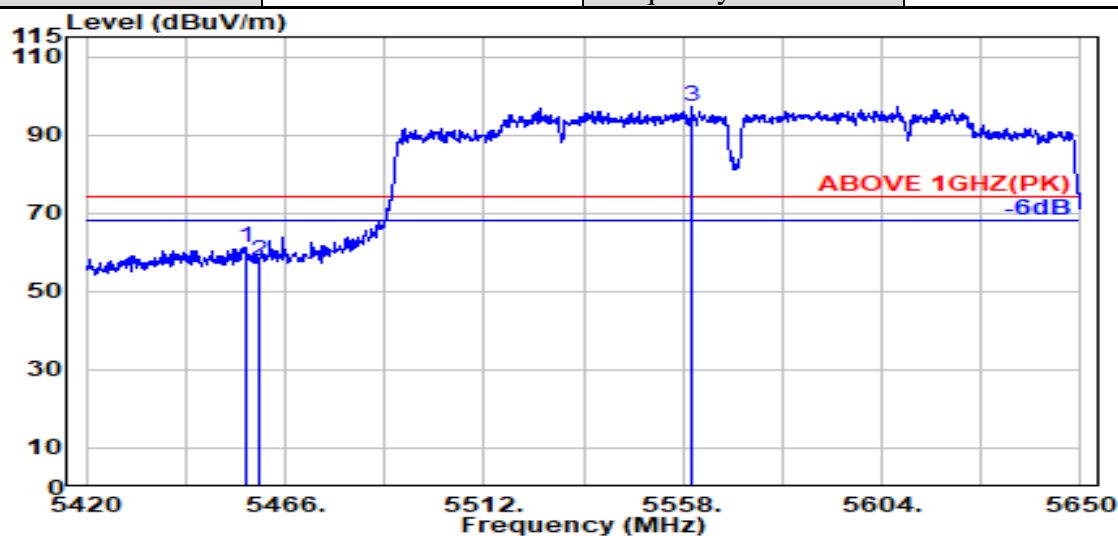

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.106	34.01	8.73	39.25	57.89	61.38	74.00	12.62	Peak
5460.000	34.02	8.73	39.25	54.07	57.57	74.00	16.43	Peak
@ 5560.146	33.96	8.79	39.26	93.86	97.35	---	---	Peak

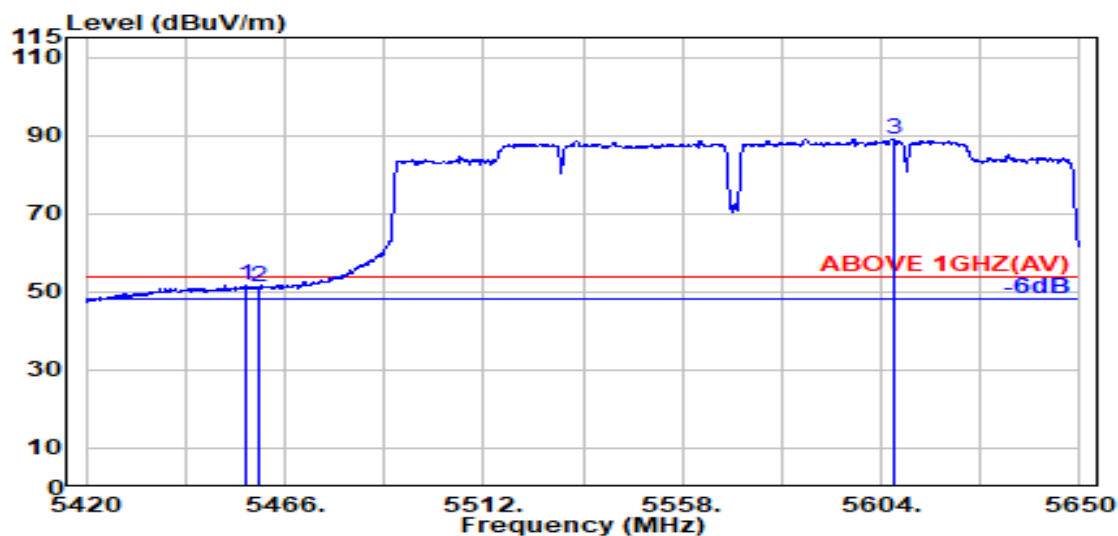


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5456.953	34.01	8.73	39.25	48.07	51.56	54.00	2.44	Average
5460.000	34.02	8.73	39.25	47.65	51.15	54.00	2.85	Average
@ 5606.760	33.80	8.81	39.27	85.82	89.17	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

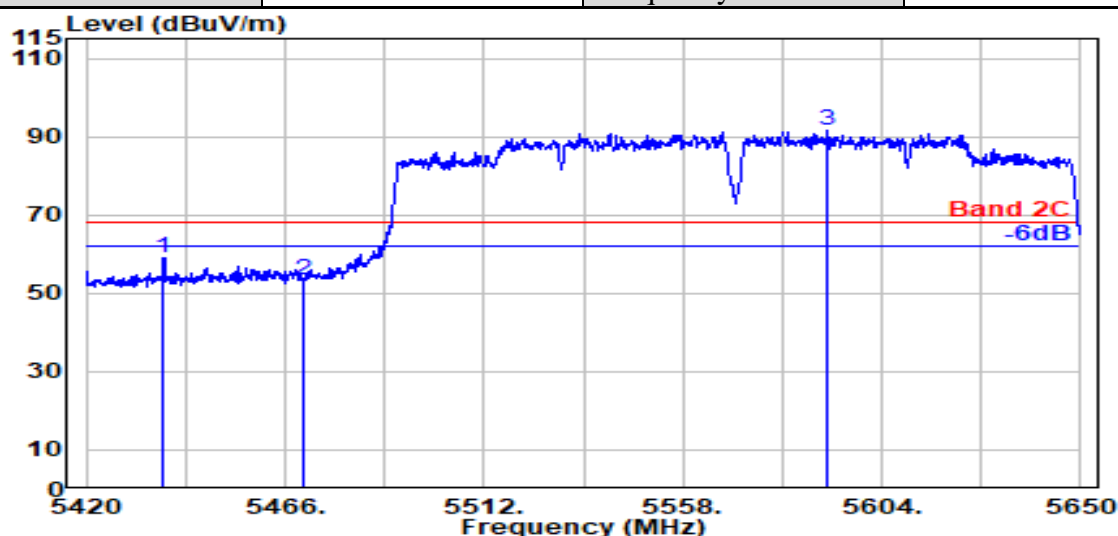

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.940	33.98	8.72	39.25	55.71	59.15	68.20	9.05	Peak
5469.987	34.04	8.74	39.25	50.02	53.54	68.20	14.66	Peak
@ 5591.427	33.83	8.81	39.27	88.33	91.71	--	---	Peak

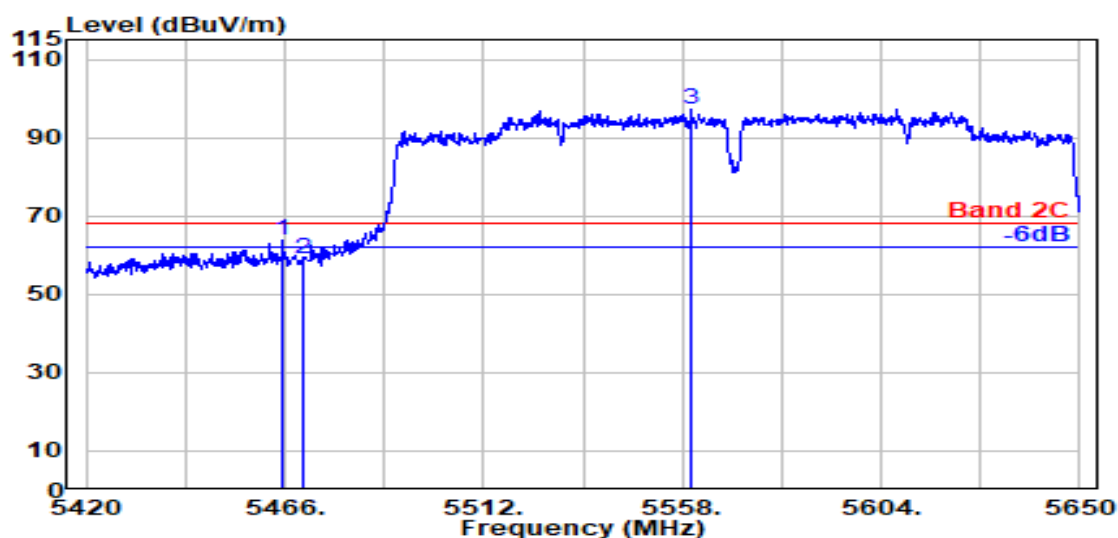


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.387	34.03	8.73	39.25	60.11	63.62	68.20	4.58	Peak
5469.987	34.04	8.74	39.25	55.52	59.05	68.20	9.15	Peak
@ 5560.146	33.96	8.79	39.26	93.86	97.35	--	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

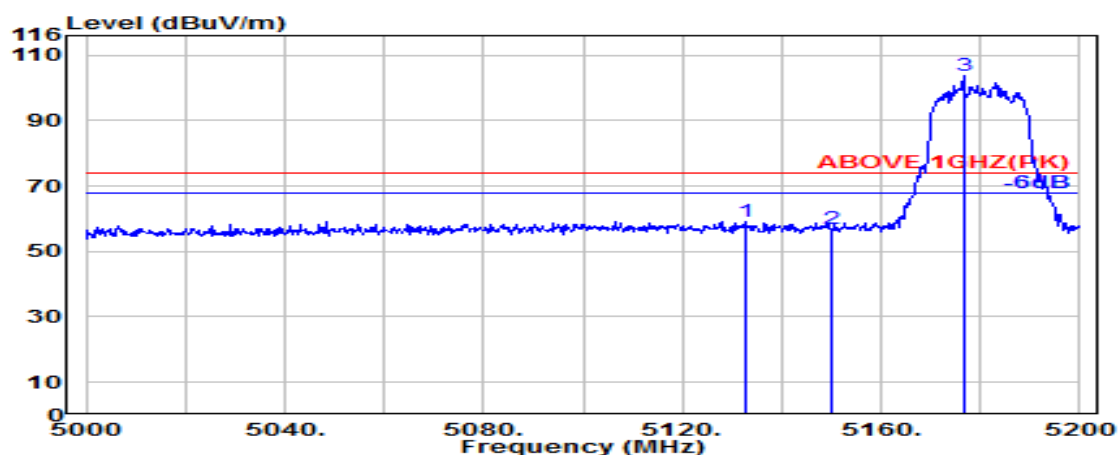

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.000	33.60	8.53	39.27	56.36	59.22	74.00	14.78	Peak
5150.000	33.60	8.54	39.27	54.00	56.87	74.00	17.13	Peak
@ 5176.800	33.65	8.56	39.27	100.76	103.70	---	---	Peak

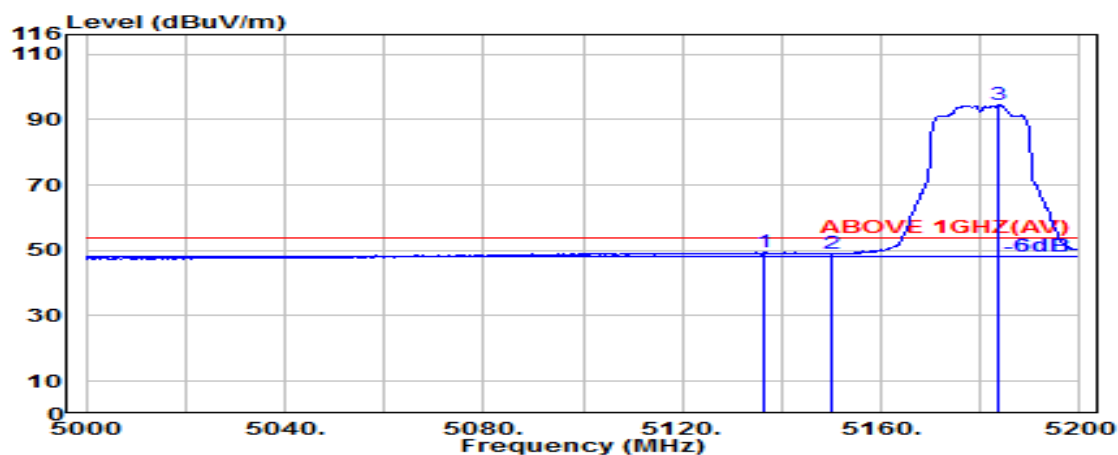


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.600	33.60	8.54	39.27	46.46	49.32	54.00	4.68	Average
5150.000	33.60	8.54	39.27	46.17	49.04	54.00	4.96	Average
@ 5183.800	33.67	8.56	39.27	91.50	94.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

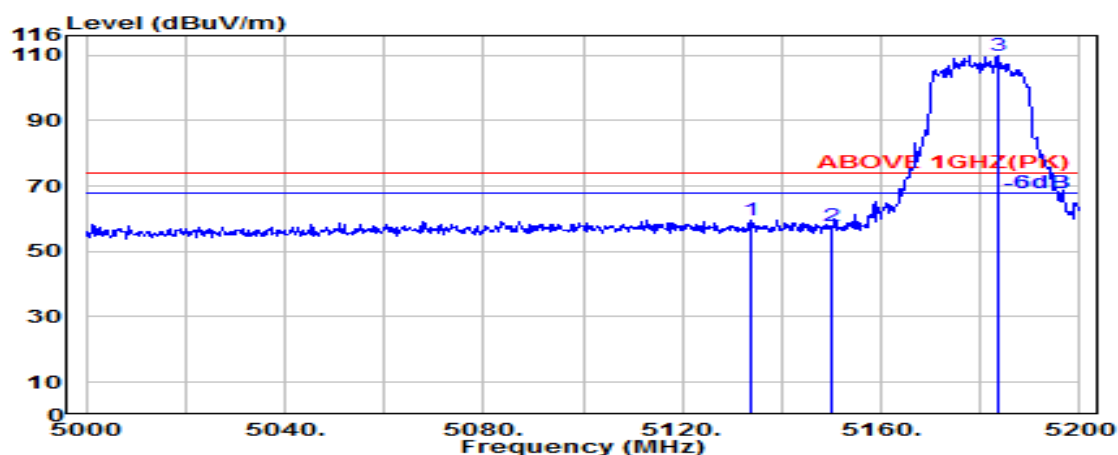

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.000	33.60	8.53	39.27	56.74	59.60	74.00	14.40	Peak
5150.000	33.60	8.54	39.27	54.88	57.75	74.00	16.25	Peak
@ 5183.600	33.67	8.56	39.27	107.07	110.03	---	---	Peak

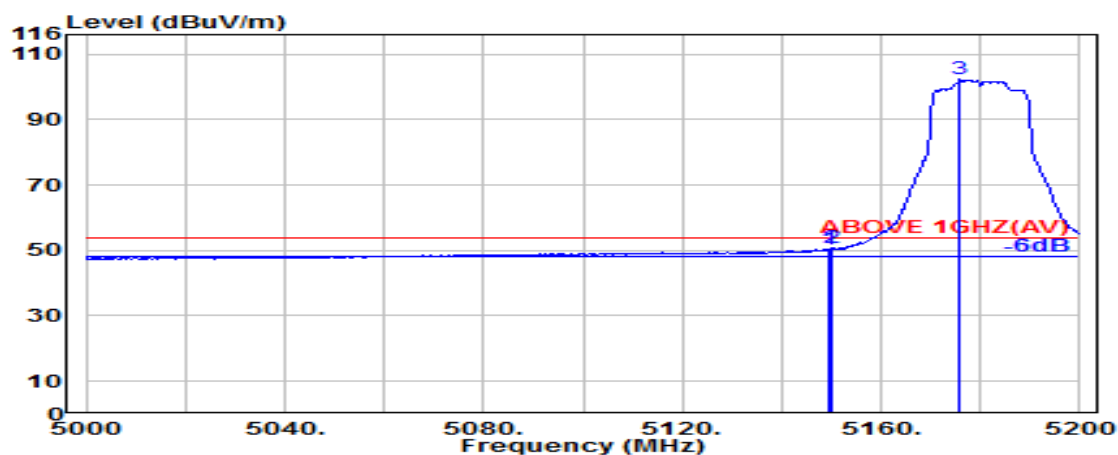

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.60	8.54	39.27	47.40	50.27	54.00	3.73	Average
5150.000	33.60	8.54	39.27	47.78	50.65	54.00	3.35	Average
@ 5175.800	33.65	8.56	39.27	99.29	102.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

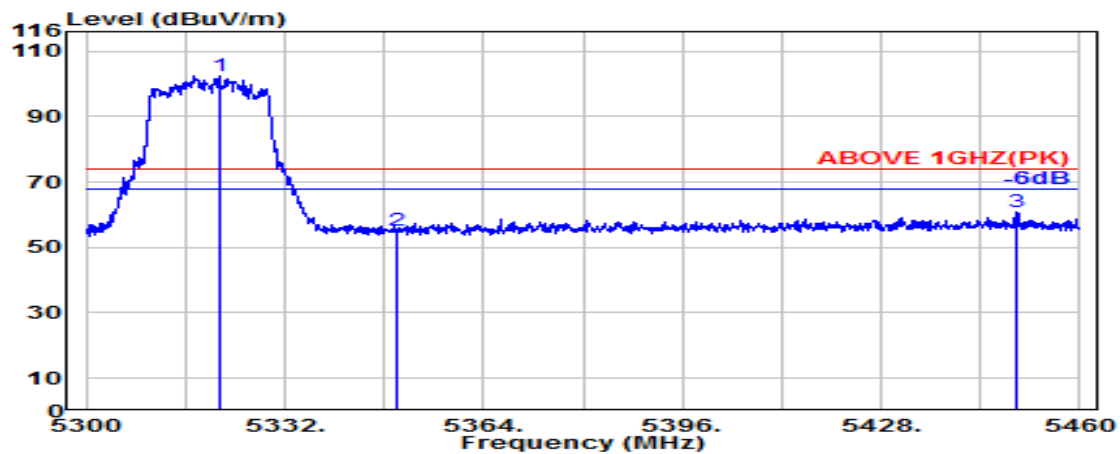

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5321.600	33.96	8.65	39.26	98.93	102.27	---	---	Peak
5350.000	33.90	8.67	39.26	51.64	54.95	74.00	19.05	Peak
5449.900	34.00	8.72	39.25	57.27	60.74	74.00	13.26	Peak

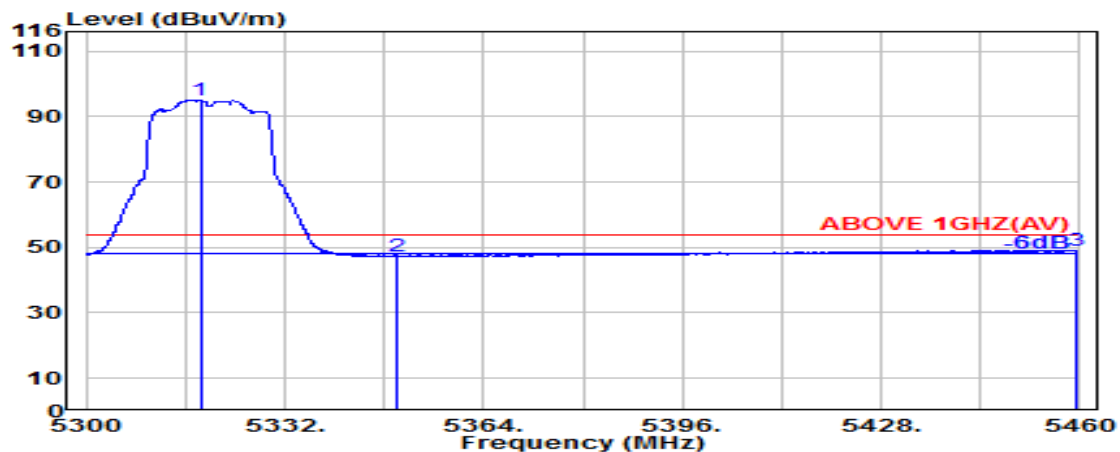

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5318.400	33.96	8.65	39.26	91.85	95.19	---	---	Average
5350.000	33.90	8.67	39.26	44.02	47.33	54.00	6.67	Average
5459.400	34.02	8.73	39.25	45.73	49.23	54.00	4.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

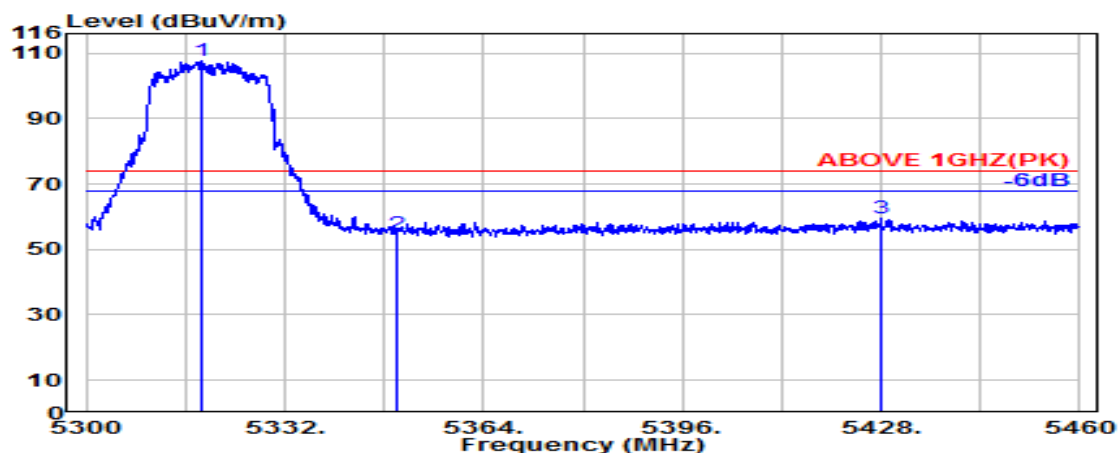

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5318.600	33.96	8.65	39.26	104.16	107.51	---	---	Peak
5350.000	33.90	8.67	39.26	51.29	54.60	74.00	19.40	Peak
5428.000	33.96	8.71	39.25	56.02	59.44	74.00	14.56	Peak

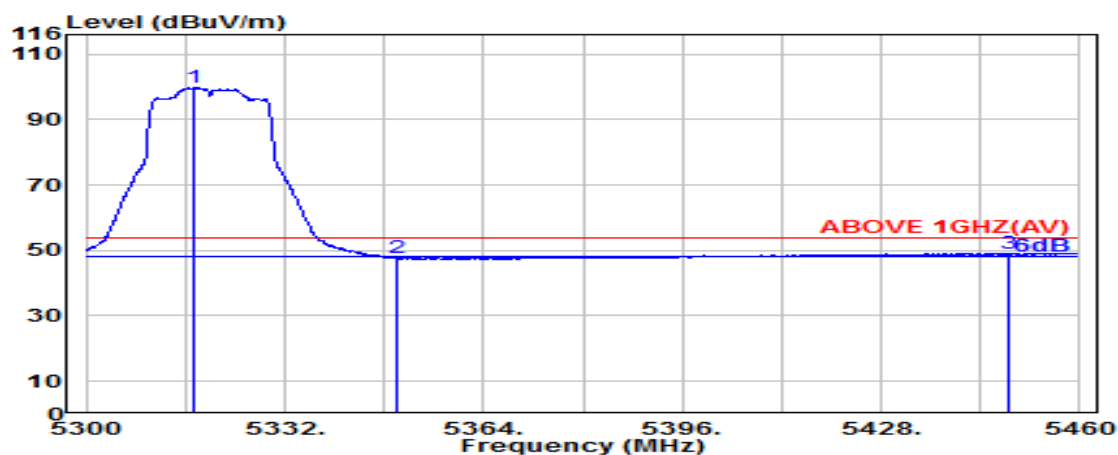


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5317.300	33.97	8.65	39.26	96.48	99.84	---	---	Average
5350.000	33.90	8.67	39.26	44.32	47.62	54.00	6.38	Average
5448.500	34.00	8.72	39.25	45.70	49.17	54.00	4.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

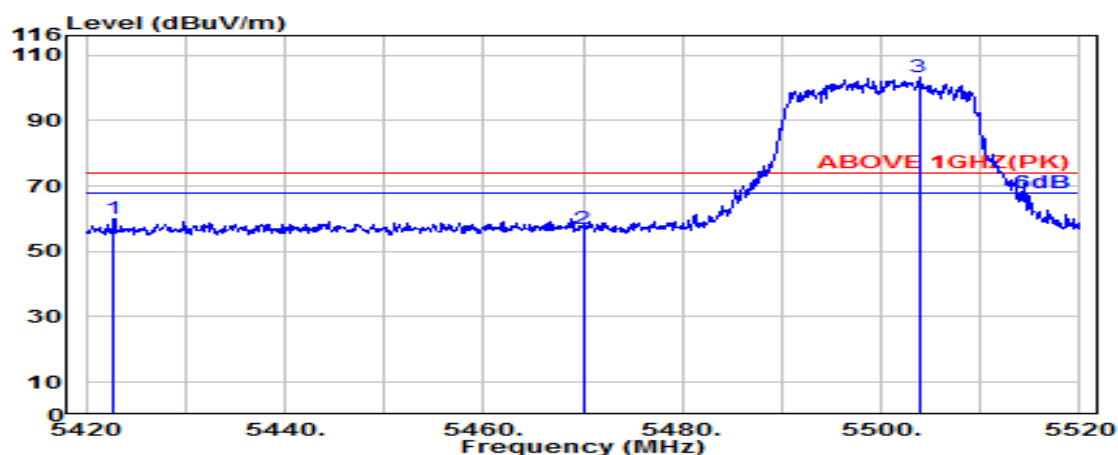

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.800	33.95	8.71	39.25	56.64	60.04	74.00	13.96	Peak
5470.000	34.04	8.74	39.25	53.33	56.86	74.00	17.14	Peak
@ 5503.800	34.09	8.76	39.25	99.82	103.42	---	---	Peak

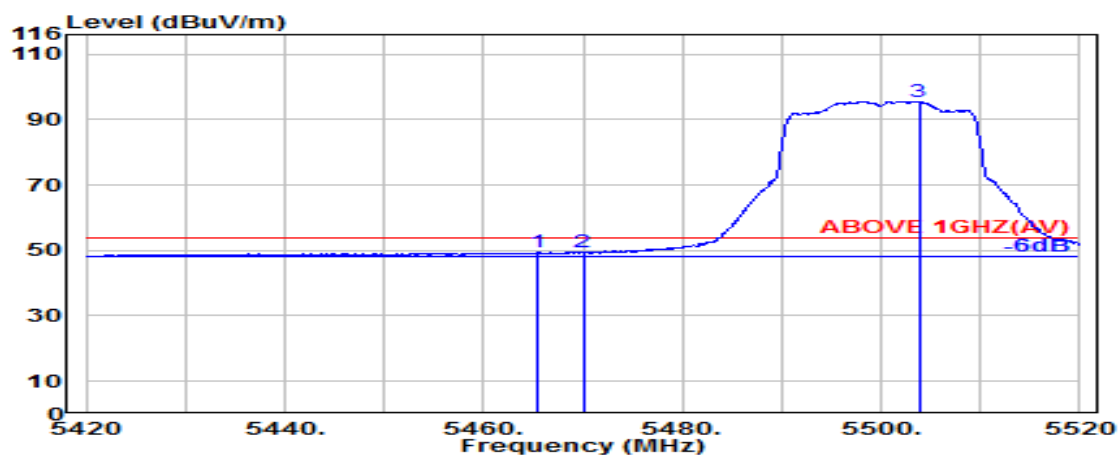

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.73	39.25	45.83	49.34	54.00	4.66	Average
5470.000	34.04	8.74	39.25	45.78	49.31	54.00	4.69	Average
@ 5503.800	34.09	8.76	39.25	91.99	95.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

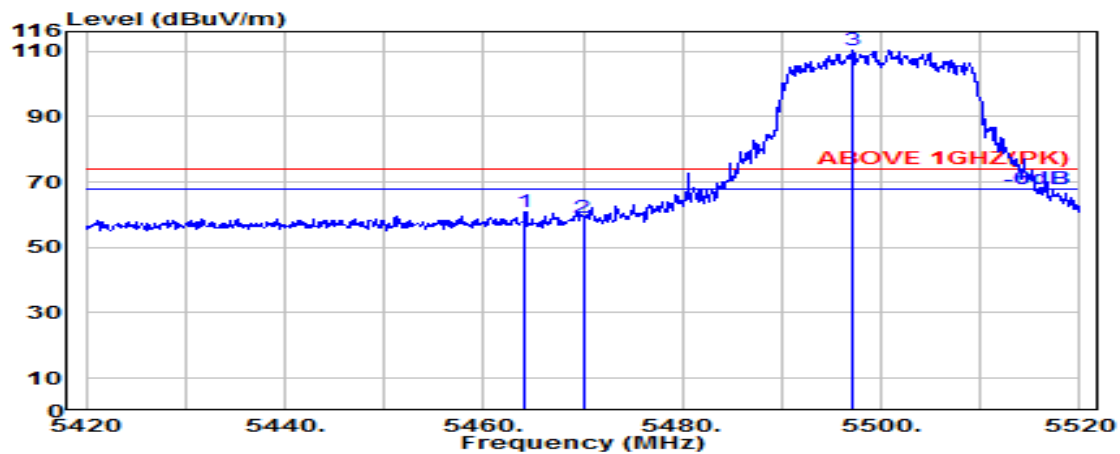

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.03	8.73	39.25	57.49	61.00	74.00	13.00	Peak
5470.000	34.04	8.74	39.25	55.69	59.22	74.00	14.78	Peak
@ 5497.100	34.09	8.75	39.25	106.72	110.31	---	---	Peak

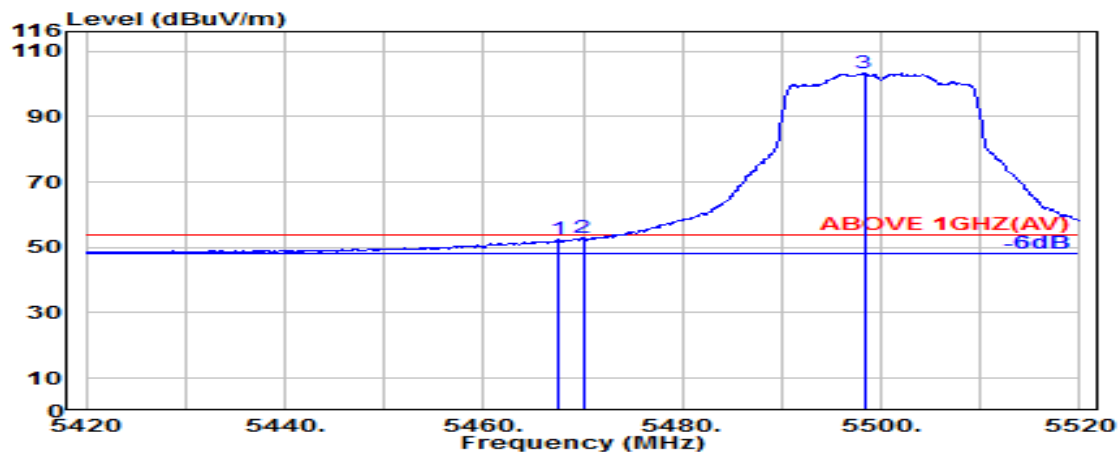

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.73	39.25	48.85	52.37	54.00	1.63	Average
5470.000	34.04	8.74	39.25	49.23	52.76	54.00	1.24	Average
@ 5498.300	34.10	8.75	39.25	99.63	103.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

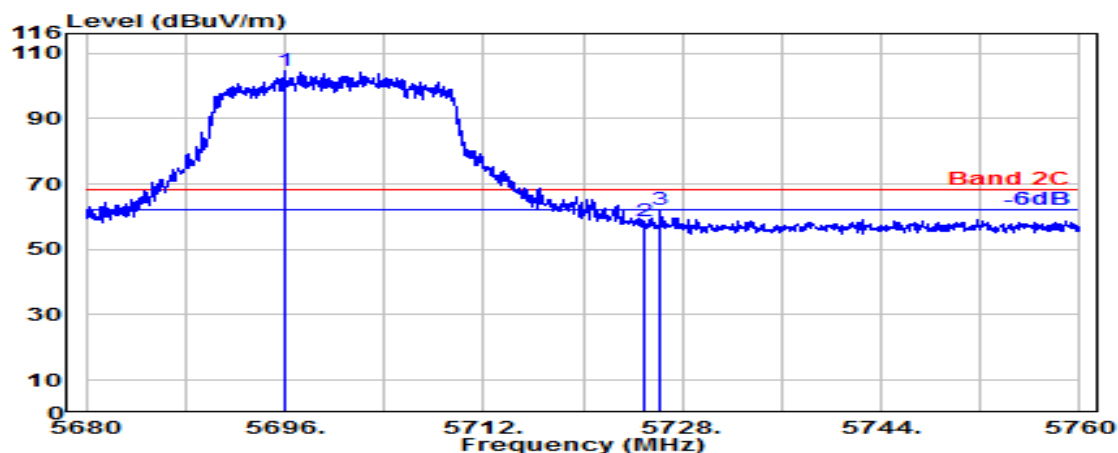

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.000	33.71	8.86	39.29	101.12	104.40	---	---	Peak
5725.000	33.70	8.88	39.29	55.55	58.84	68.20	9.36	Peak
5726.250	33.70	8.88	39.29	58.68	61.97	68.20	6.23	Peak

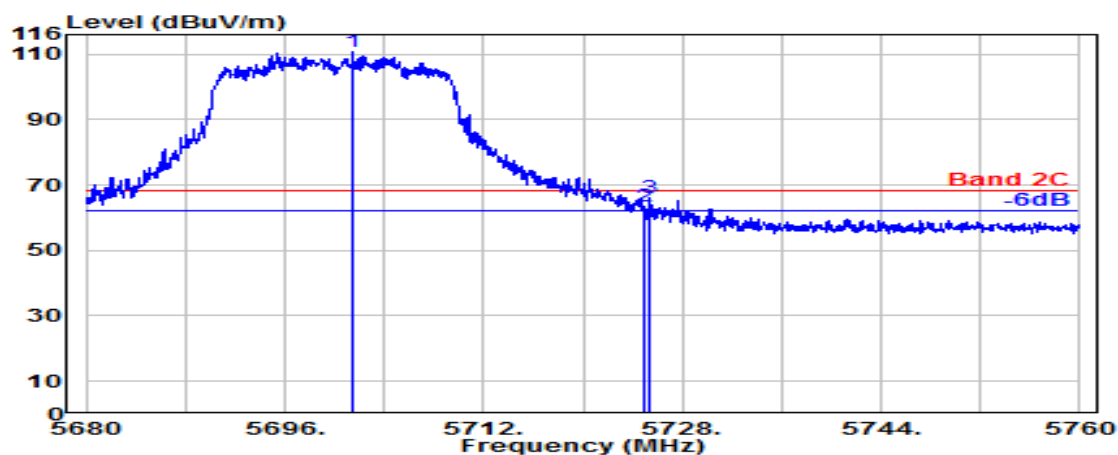

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.450	33.70	8.87	39.29	107.43	110.71	---	---	Peak
5725.000	33.70	8.88	39.29	60.02	63.31	68.20	4.89	Peak
5725.400	33.70	8.88	39.29	62.59	65.88	68.20	2.32	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

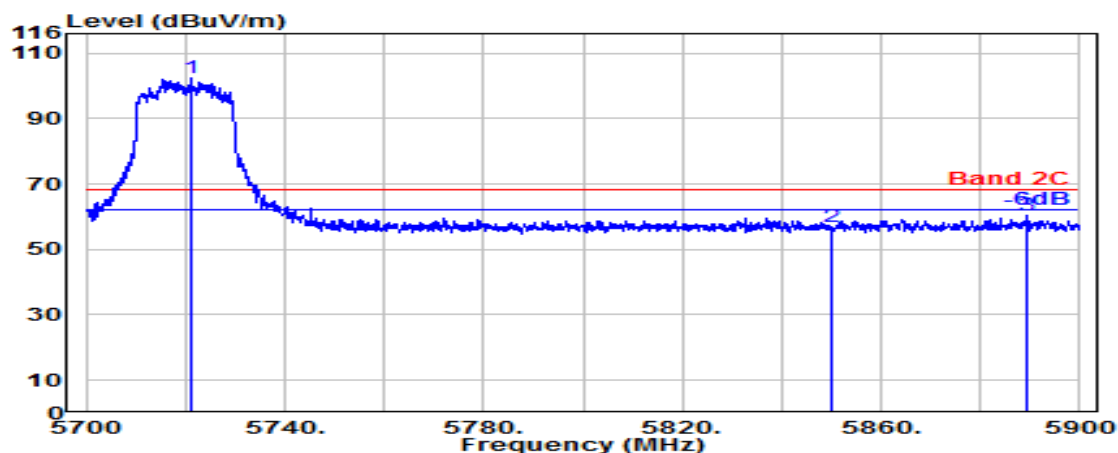

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.200	33.70	8.88	39.29	99.02	102.31	---	---	Peak
5850.000	34.00	8.95	39.31	53.06	56.70	68.20	11.50	Peak
5889.300	34.08	8.97	39.32	56.62	60.34	68.20	7.86	Peak

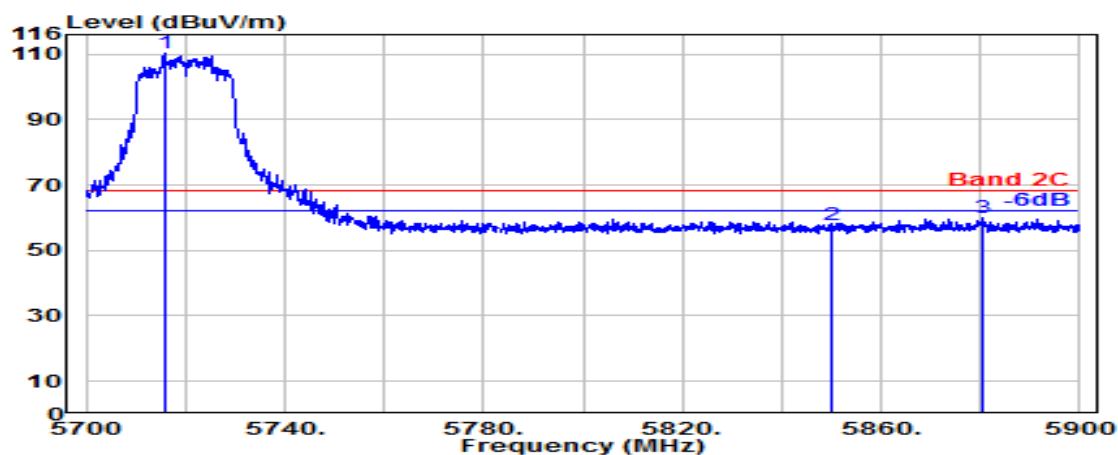

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.700	33.70	8.88	39.29	106.82	110.11	---	---	Peak
5850.000	34.00	8.95	39.31	54.30	57.94	68.20	10.26	Peak
5880.200	34.06	8.97	39.32	56.23	59.94	68.20	8.26	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

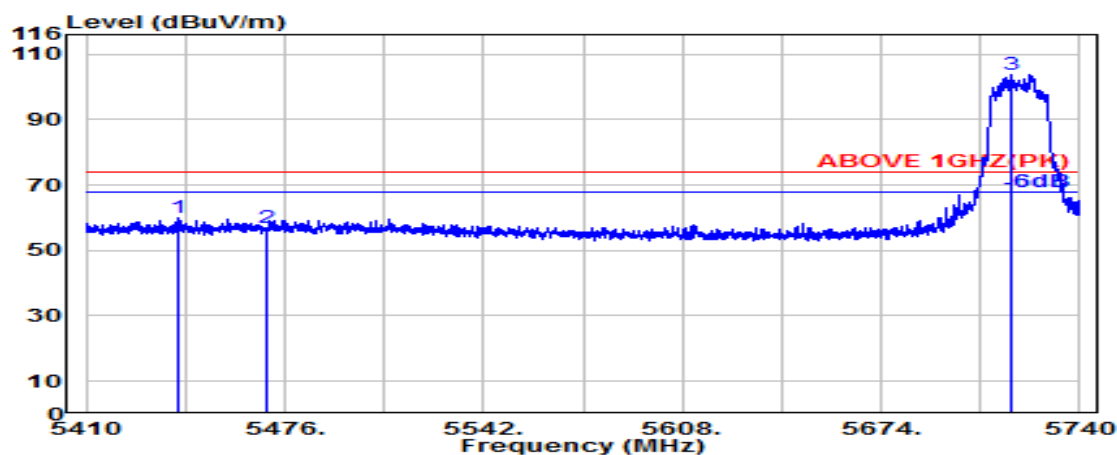

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.300	33.98	8.72	39.25	56.69	60.14	74.00	13.86	Peak
5470.000	34.04	8.74	39.25	53.32	56.84	74.00	17.16	Peak
@ 5717.100	33.70	8.88	39.29	100.38	103.66	---	---	Peak

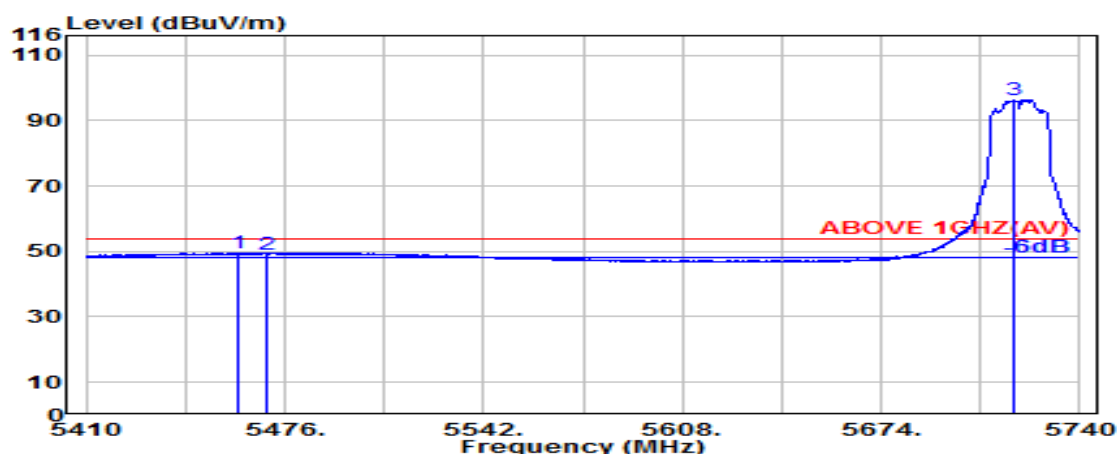


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.300	34.02	8.73	39.25	46.14	49.64	54.00	4.36	Average
5470.000	34.04	8.74	39.25	45.64	49.17	54.00	4.83	Average
@ 5718.000	33.70	8.88	39.29	92.90	96.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

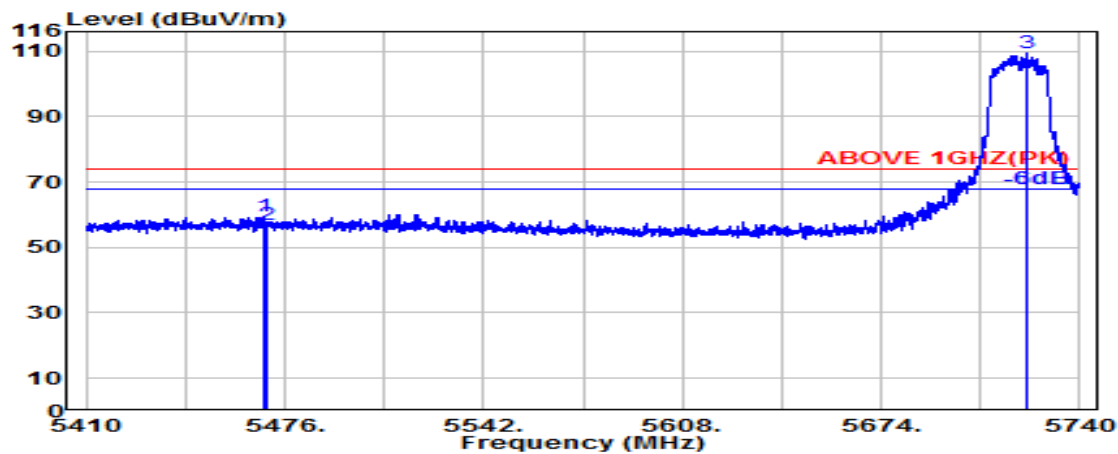

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.74	39.25	56.05	59.57	74.00	14.43	Peak
5470.000	34.04	8.74	39.25	53.39	56.92	74.00	17.08	Peak
@ 5722.400	33.70	8.88	39.29	106.33	109.61	---	---	Peak

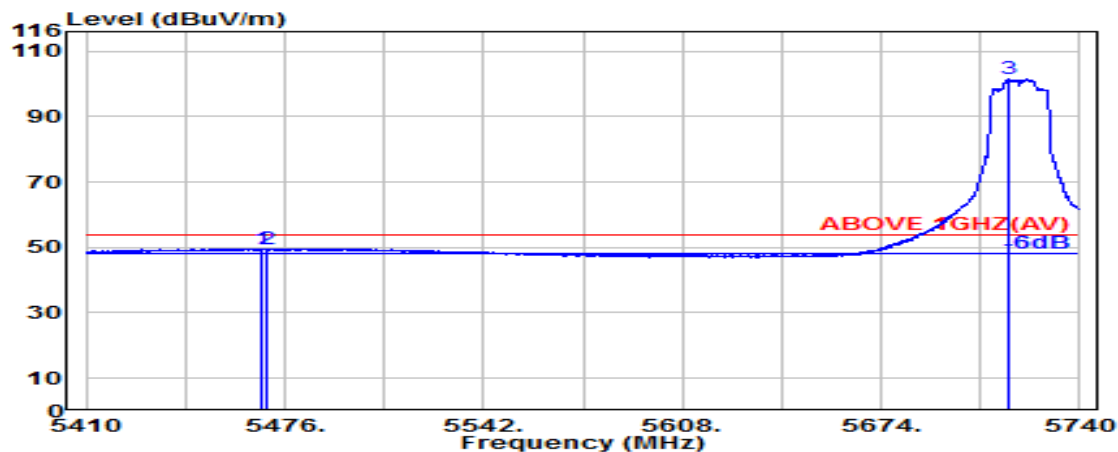

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.73	39.25	46.13	49.65	54.00	4.35	Average
5470.000	34.04	8.74	39.25	45.96	49.49	54.00	4.51	Average
@ 5716.600	33.70	8.88	39.29	98.07	101.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

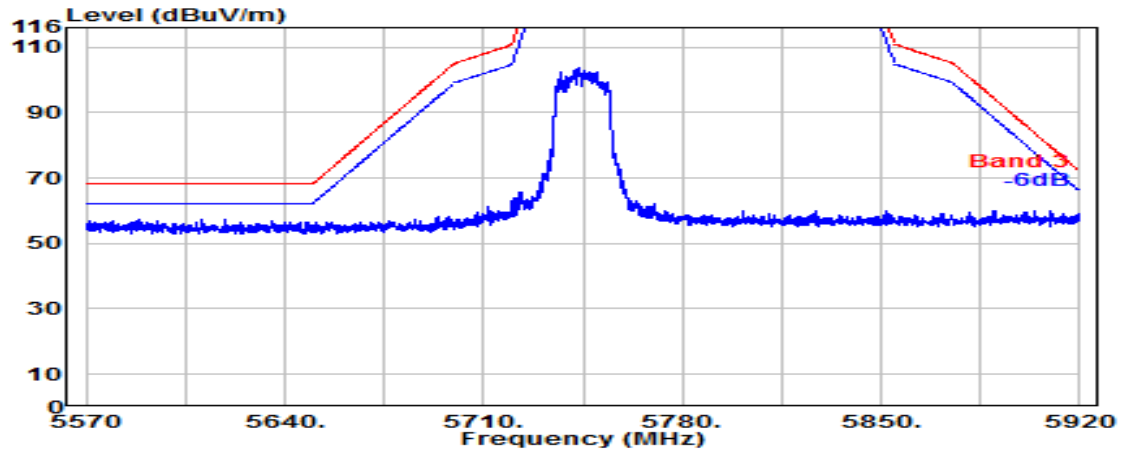

Antenna at Vertical Polarization

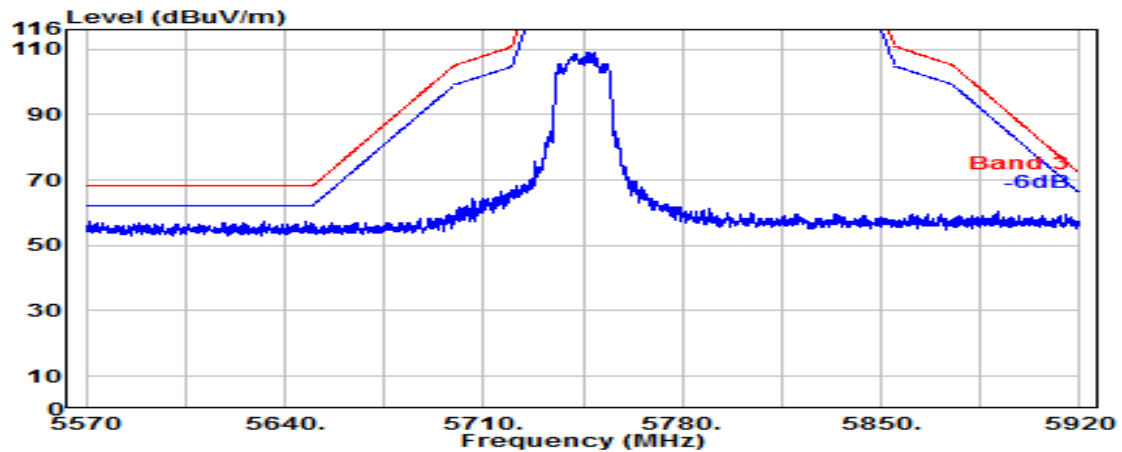


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

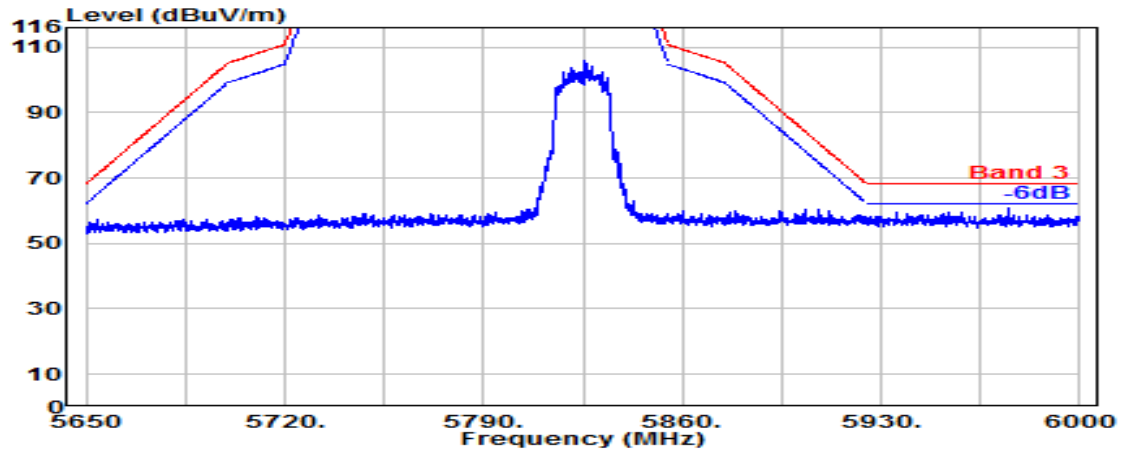

Antenna at Vertical Polarization

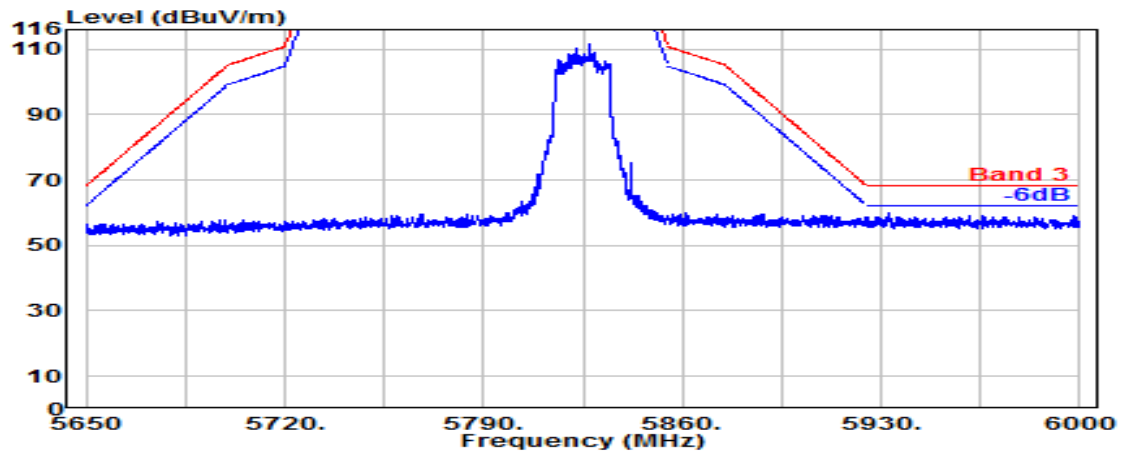


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

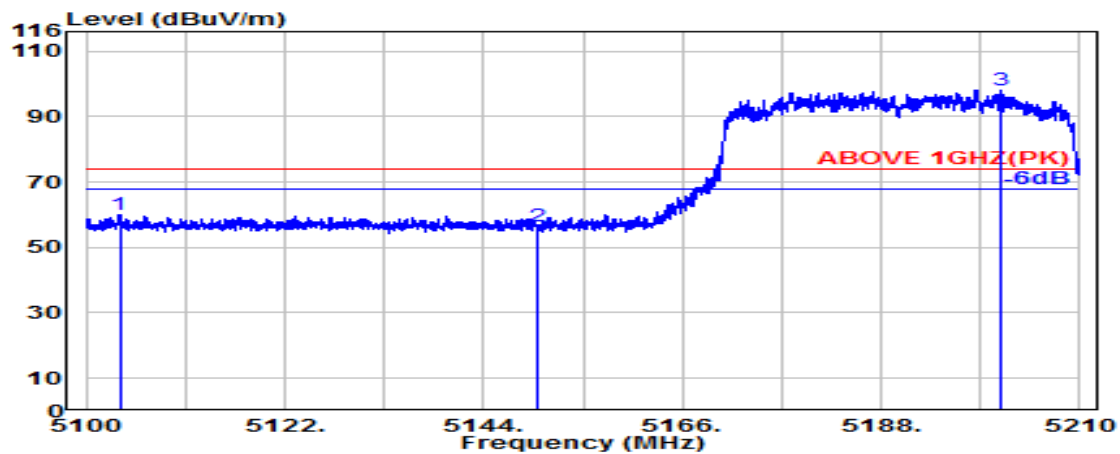

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.708	33.60	8.52	39.27	57.03	59.87	74.00	14.13	Peak
5150.000	33.60	8.54	39.27	53.79	56.66	74.00	17.34	Peak
@ 5201.263	33.70	8.58	39.27	95.07	98.07	---	---	Peak

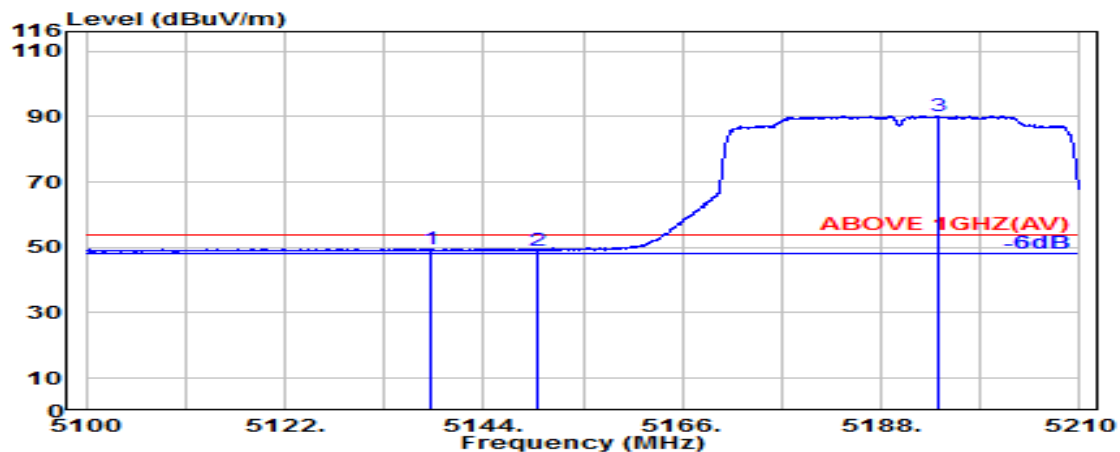

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.060	33.60	8.54	39.27	46.76	49.63	54.00	4.37	Average
5150.000	33.60	8.54	39.27	46.29	49.16	54.00	4.84	Average
@ 5194.223	33.69	8.57	39.27	87.30	90.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

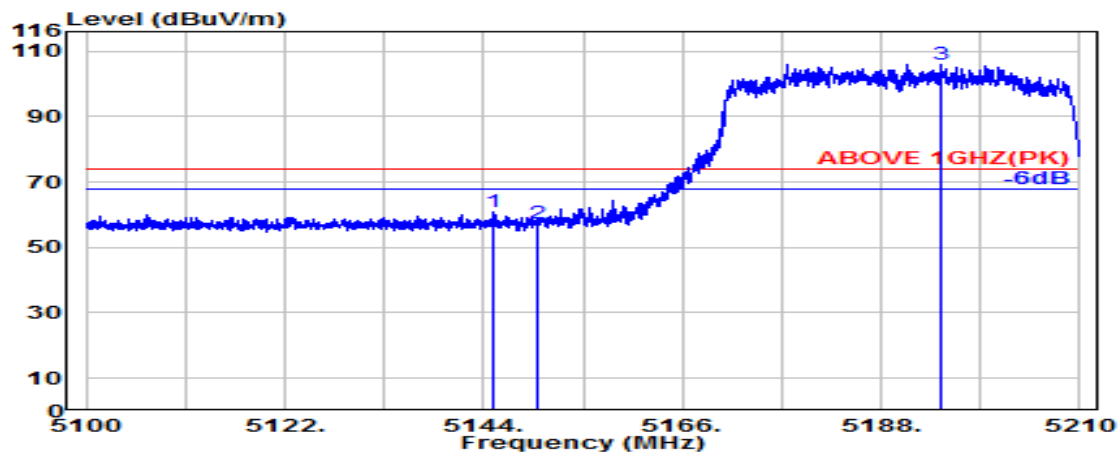

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.194	33.60	8.54	39.27	58.04	60.91	74.00	13.09	Peak
5150.000	33.60	8.54	39.27	54.45	57.32	74.00	16.68	Peak
@ 5194.631	33.69	8.57	39.27	103.12	106.12	---	---	Peak

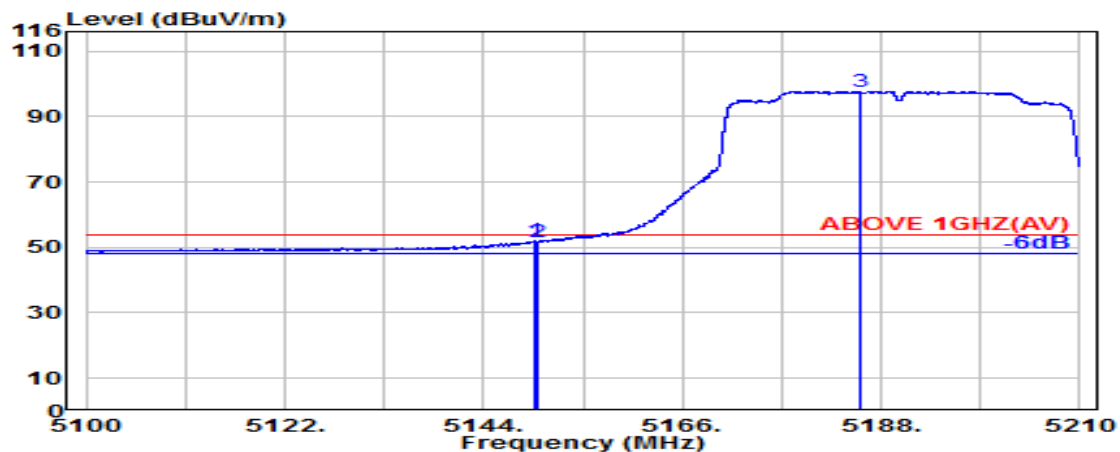

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.688	33.60	8.54	39.27	49.02	51.89	54.00	2.11	Average
5150.000	33.60	8.54	39.27	48.86	51.74	54.00	2.26	Average
@ 5185.737	33.67	8.57	39.27	94.84	97.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

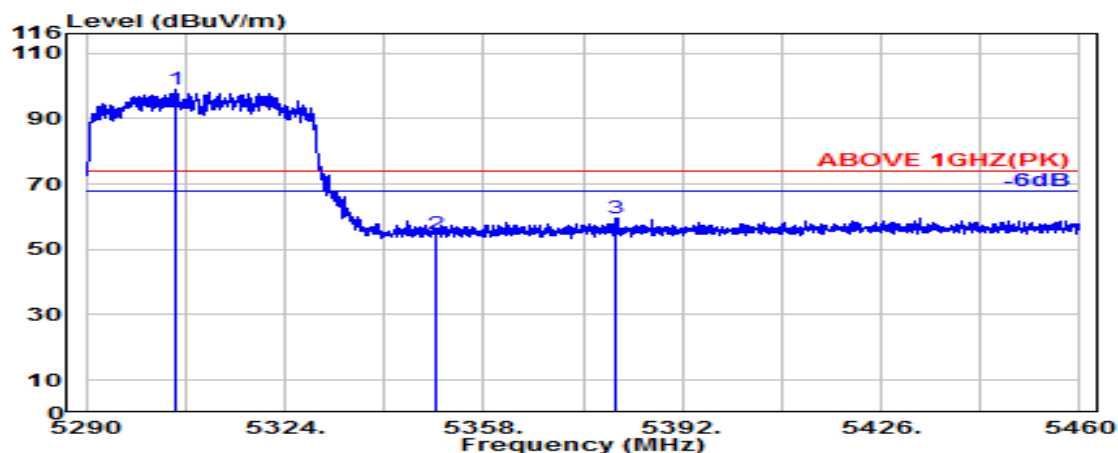

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.446	33.99	8.64	39.26	95.47	98.84	---	---	Peak
5350.000	33.90	8.67	39.26	51.62	54.93	74.00	19.07	Peak
5380.780	33.90	8.68	39.26	56.40	59.73	74.00	14.27	Peak

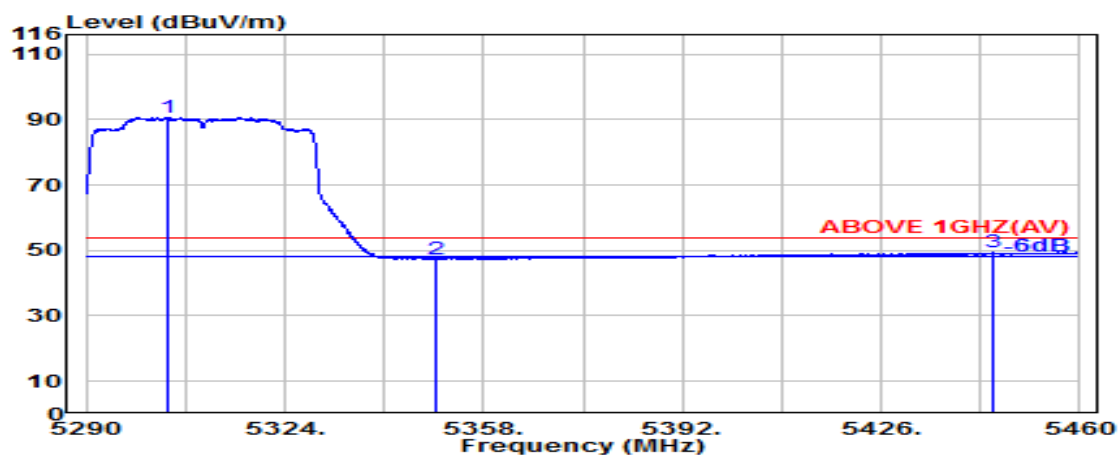

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.843	33.99	8.64	39.26	87.30	90.67	---	---	Average
5350.000	33.90	8.67	39.26	44.07	47.37	54.00	6.63	Average
5445.137	33.99	8.72	39.25	45.97	49.43	54.00	4.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

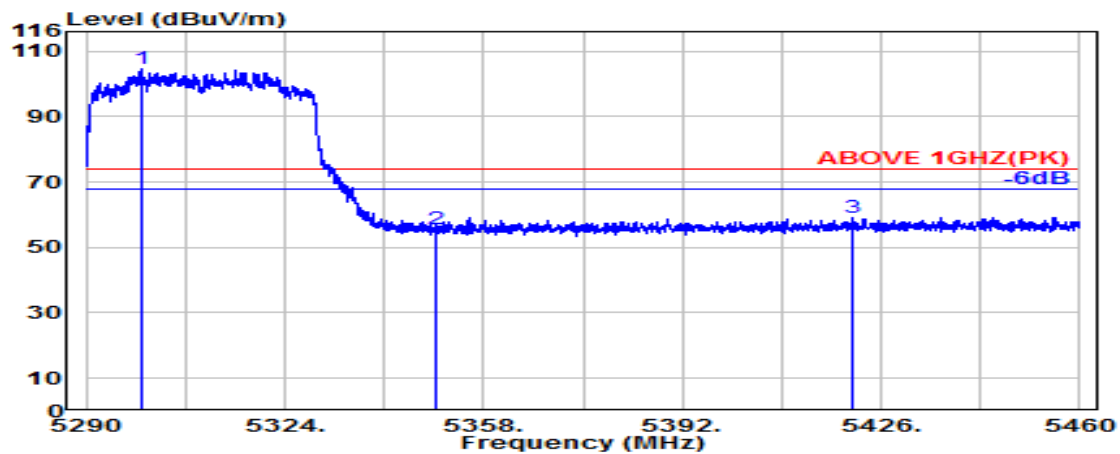

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5299.326	34.00	8.63	39.26	101.12	104.49	---	---	Peak
5350.000	33.90	8.67	39.26	52.44	55.75	74.00	18.25	Peak
5420.949	33.94	8.71	39.25	55.89	59.29	74.00	14.71	Peak

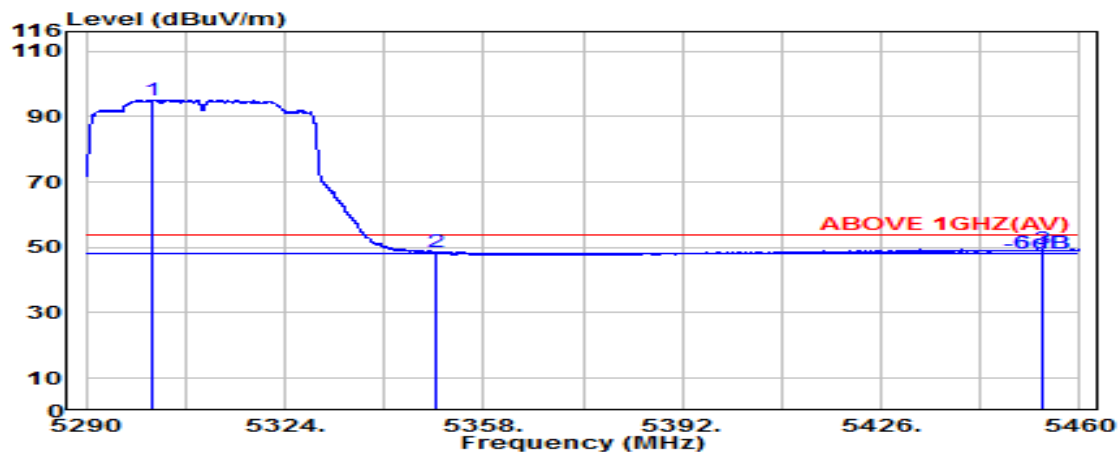


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5301.511	34.00	8.64	39.26	91.80	95.17	---	---	Average
5350.000	33.90	8.67	39.26	45.21	48.52	54.00	5.48	Average
5453.783	34.01	8.73	39.25	45.81	49.29	54.00	4.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

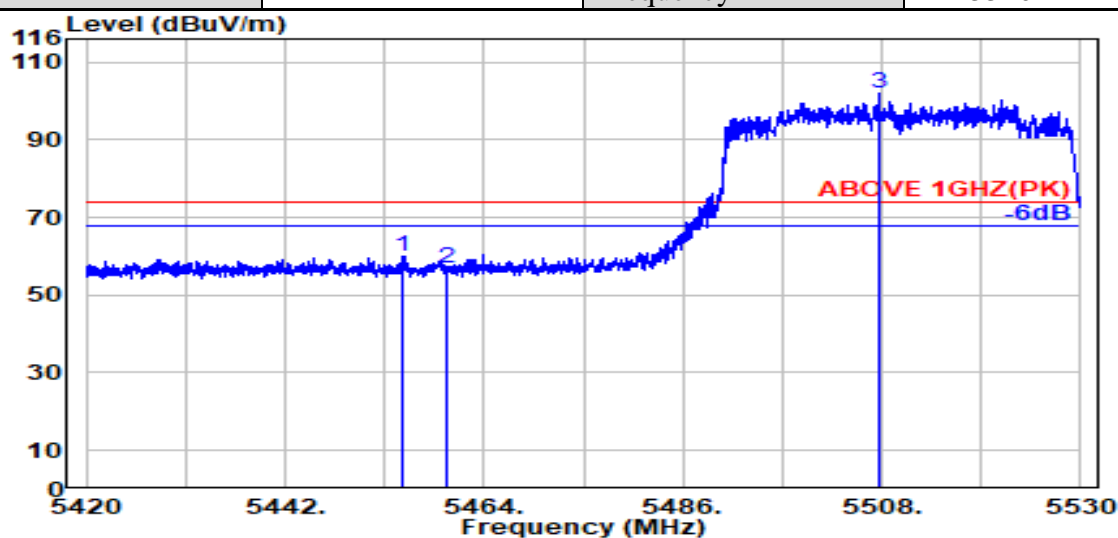

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.106	34.01	8.73	39.25	56.47	59.95	74.00	14.05	Peak
5460.009	34.02	8.73	39.25	53.60	57.10	74.00	16.90	Peak
@ 5507.654	34.08	8.76	39.25	98.29	101.89	---	---	Peak

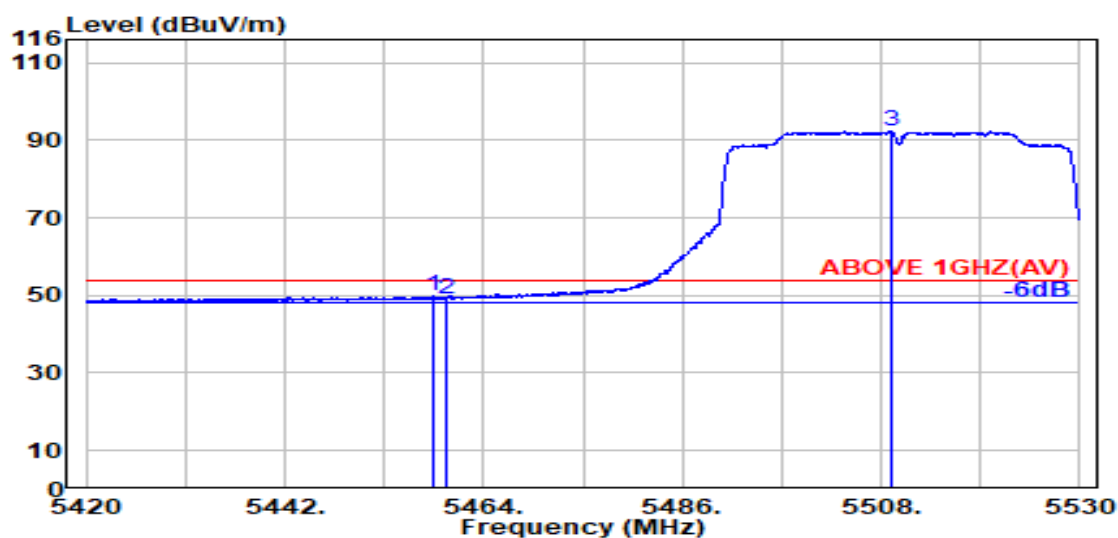


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.437	34.02	8.73	39.25	46.23	49.72	54.00	4.28	Average
5460.009	34.02	8.73	39.25	45.74	49.24	54.00	4.76	Average
@ 5509.068	34.08	8.76	39.25	88.68	92.27	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

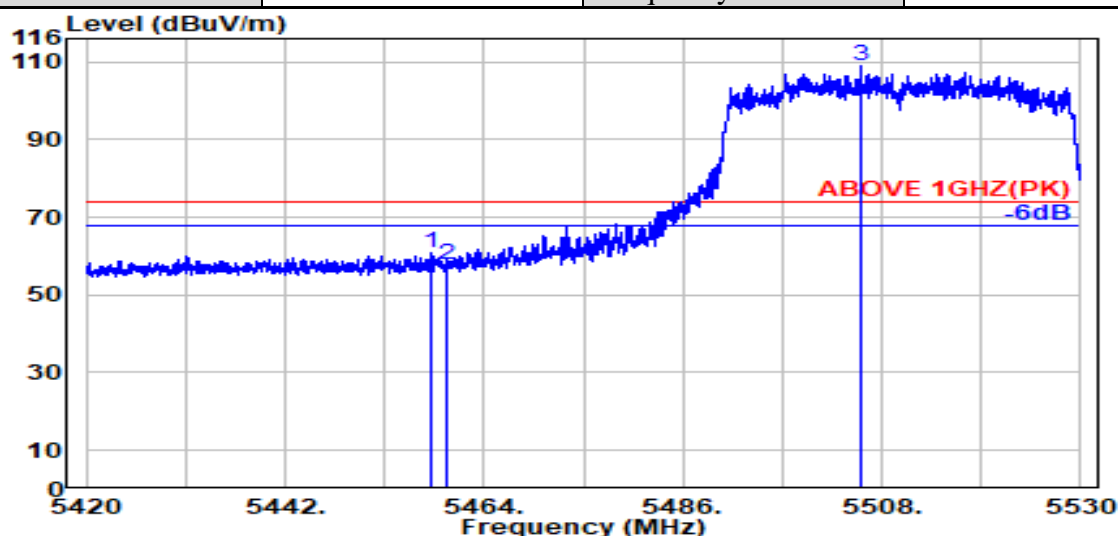

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.154	34.02	8.73	39.25	57.32	60.81	74.00	13.19	Peak
5460.009	34.02	8.73	39.25	54.37	57.87	74.00	16.13	Peak
@ 5505.769	34.09	8.76	39.25	105.29	108.89	---	---	Peak

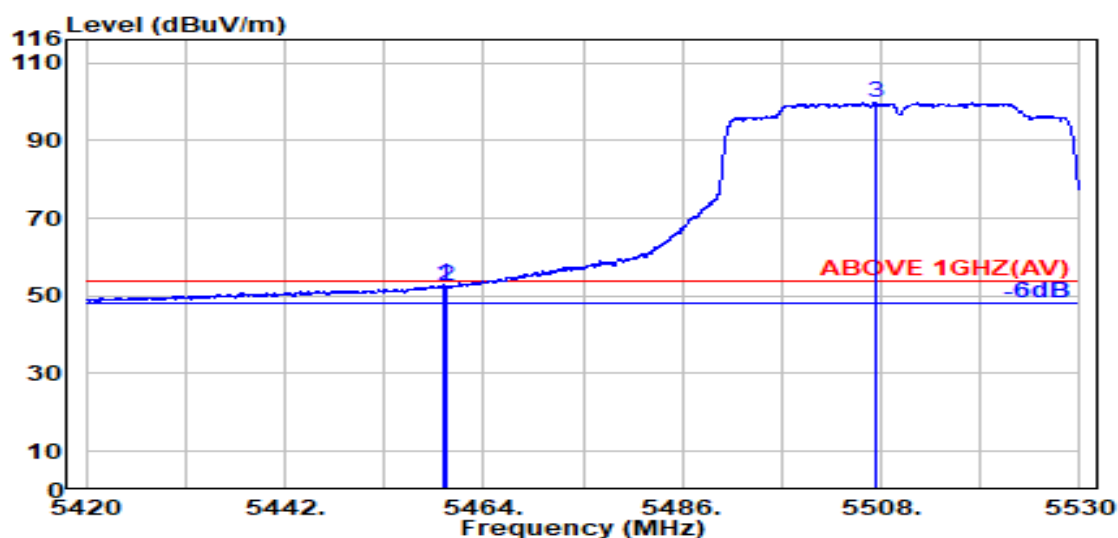

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.537	34.02	8.73	39.25	48.98	52.48	54.00	1.52	Average
5460.009	34.02	8.73	39.25	48.88	52.37	54.00	1.63	Average
@ 5507.340	34.09	8.76	39.25	96.13	99.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

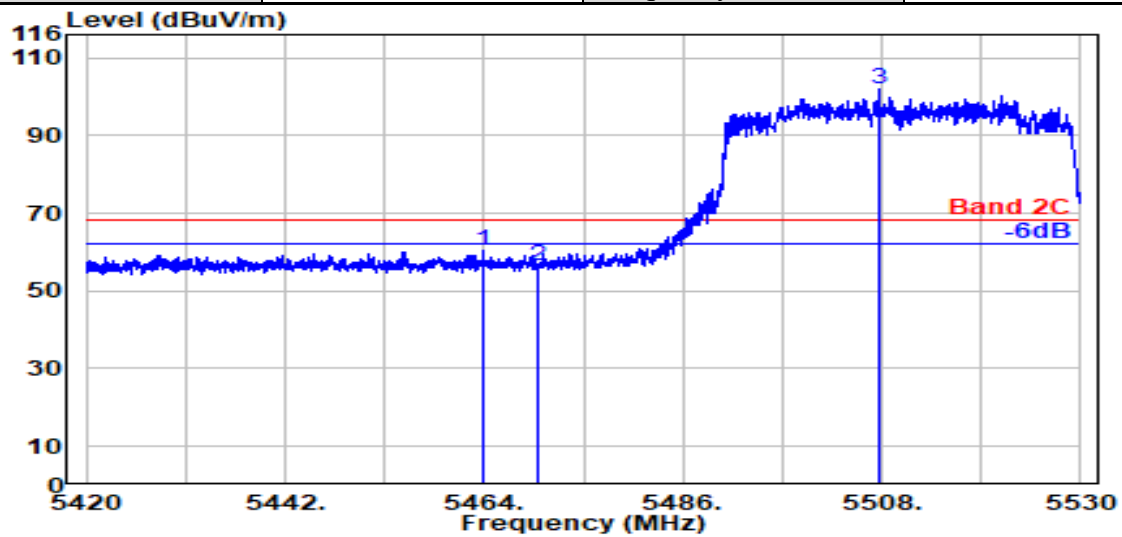

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.906	34.03	8.73	39.25	56.72	60.23	68.20	7.97	Peak
5470.000	34.04	8.74	39.25	52.75	56.27	68.20	11.93	Peak
@ 5507.654	34.08	8.76	39.25	98.29	101.89	---	---	Peak

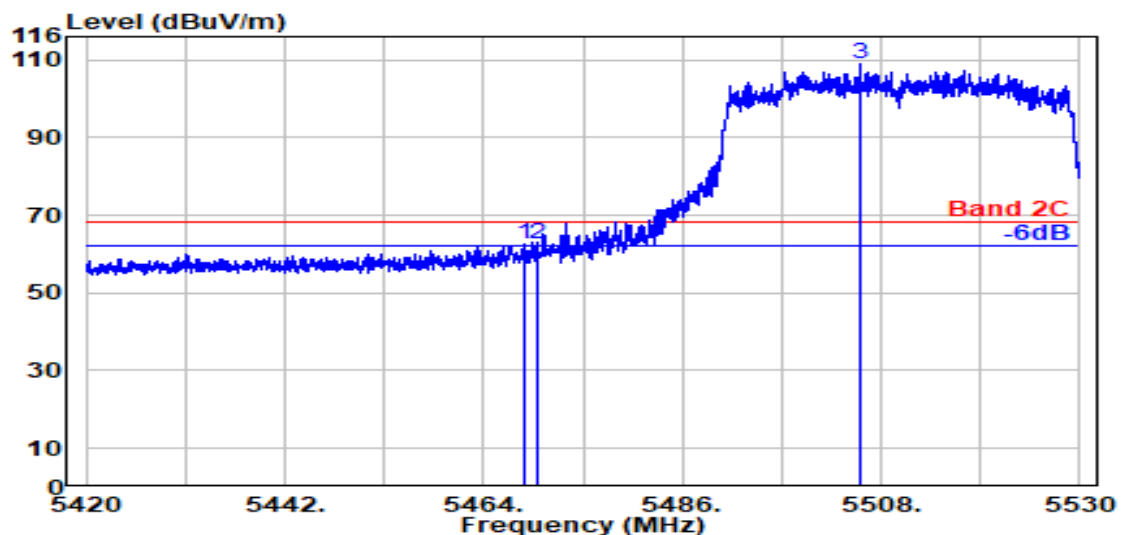

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.620	34.04	8.73	39.25	59.29	62.81	68.20	5.39	Peak
5470.000	34.04	8.74	39.25	58.99	62.51	68.20	5.69	Peak
@ 5505.769	34.09	8.76	39.25	105.29	108.89	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2306288


Report Number: EM-F230366

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

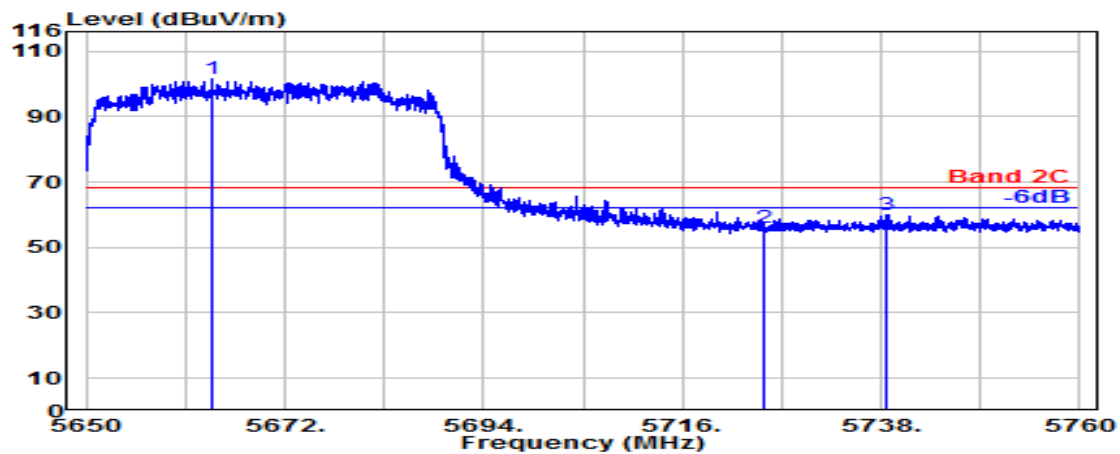

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5663.923	33.77	8.85	39.28	98.32	101.66	---	---	Peak
5725.000	33.70	8.88	39.29	52.82	56.11	68.20	12.09	Peak
5738.691	33.70	8.89	39.29	56.79	60.08	68.20	8.12	Peak

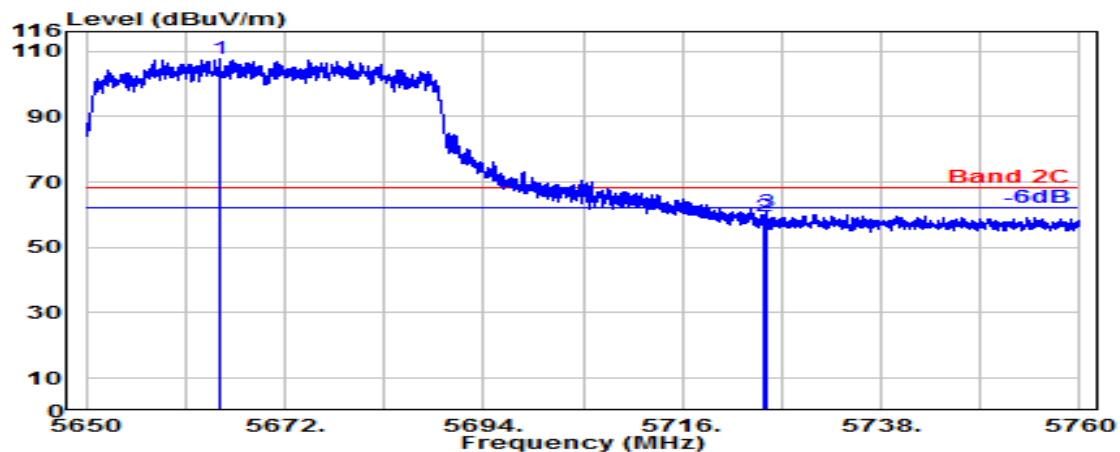

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5664.803	33.77	8.85	39.28	104.27	107.60	---	---	Peak
5725.000	33.70	8.88	39.29	56.22	59.51	68.20	8.69	Peak
5725.303	33.70	8.88	39.29	57.36	60.65	68.20	7.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

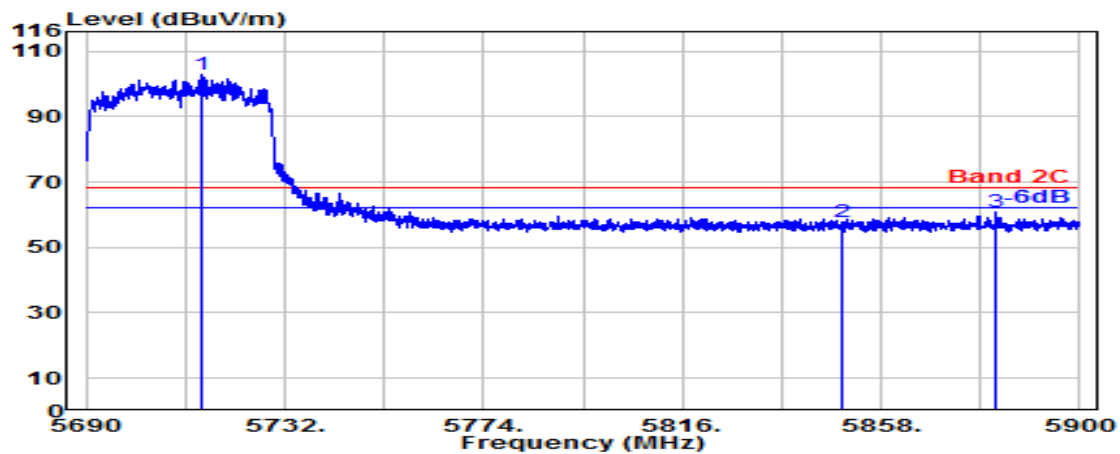

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.240	33.70	8.87	39.29	99.68	102.97	---	---	Peak
5850.000	34.00	8.95	39.31	53.98	57.61	68.20	10.59	Peak
5882.120	34.06	8.97	39.32	56.93	60.64	68.20	7.56	Peak

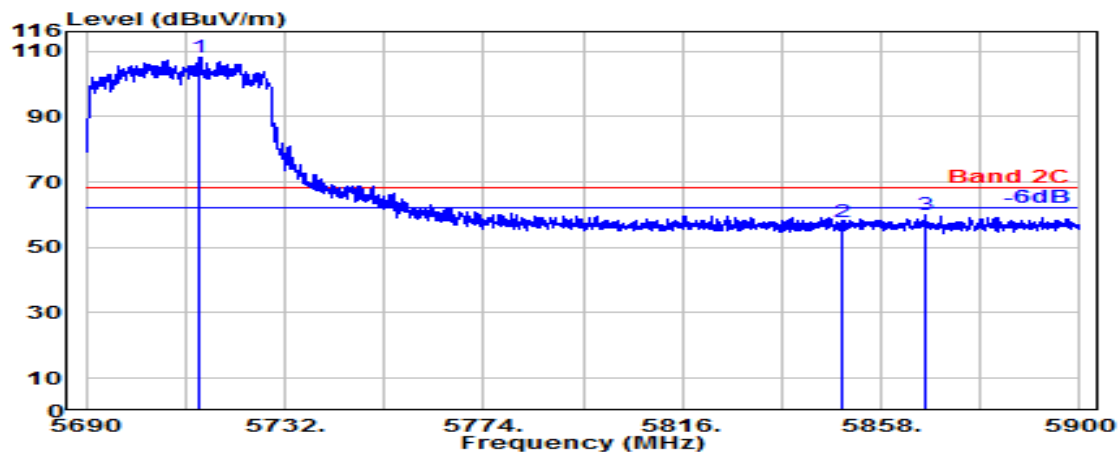


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.120	33.70	8.87	39.29	104.84	108.13	---	---	Peak
5850.000	34.00	8.95	39.31	54.05	57.68	68.20	10.52	Peak
5867.300	34.03	8.96	39.32	56.28	59.96	68.20	8.24	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

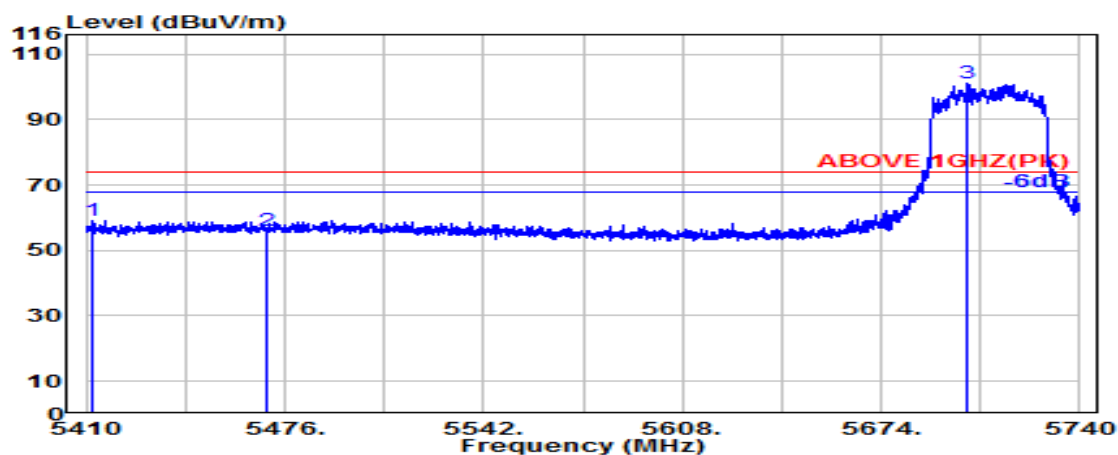

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.168	33.92	8.70	39.26	55.61	58.98	74.00	15.02	Peak
5470.000	34.04	8.74	39.25	52.69	56.22	74.00	17.78	Peak
@ 5702.474	33.70	8.87	39.29	97.77	101.05	---	---	Peak

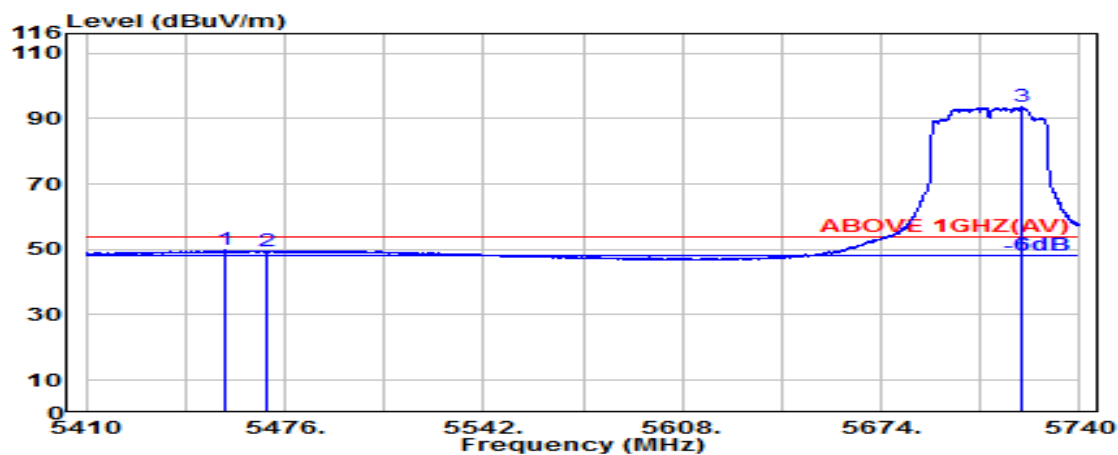

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.483	34.01	8.73	39.25	46.23	49.72	54.00	4.28	Peak
5470.000	34.04	8.74	39.25	45.83	49.35	54.00	4.65	Peak
@ 5720.954	33.70	8.88	39.29	90.21	93.49	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

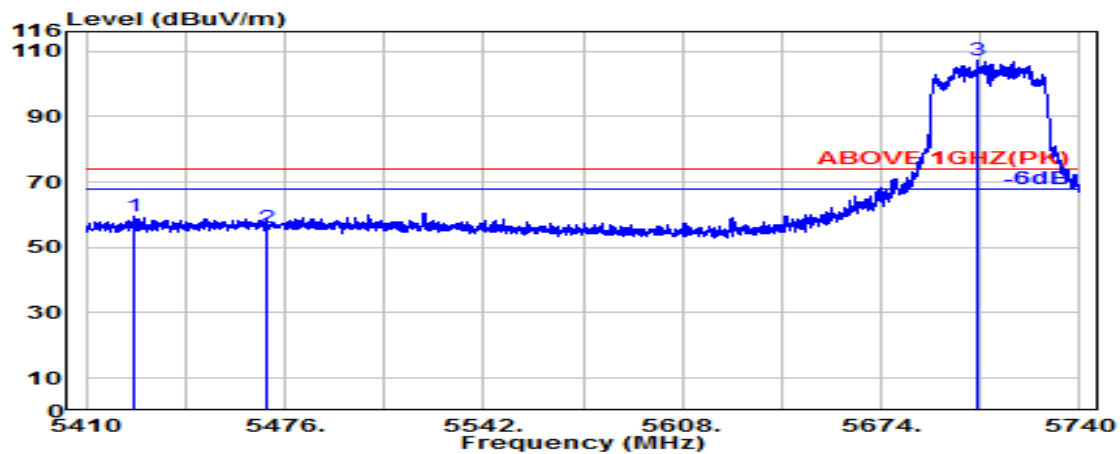

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.217	33.95	8.71	39.25	56.21	59.61	74.00	14.39	Peak
5470.000	34.04	8.74	39.25	52.64	56.16	74.00	17.84	Peak
@ 5705.869	33.70	8.87	39.29	103.75	107.03	---	---	Peak

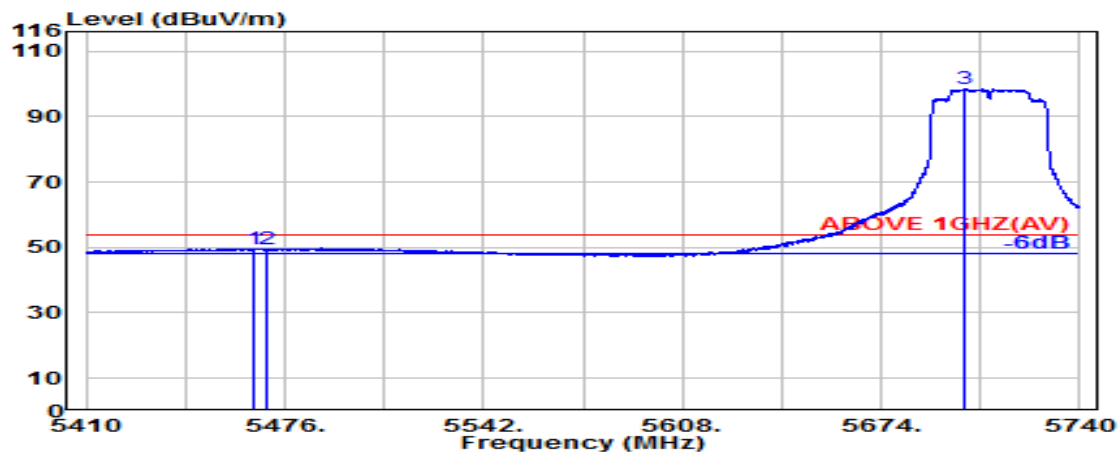

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.534	34.03	8.73	39.25	46.06	49.58	54.00	4.42	Peak
5470.000	34.04	8.74	39.25	45.92	49.44	54.00	4.56	Peak
@ 5701.814	33.70	8.87	39.29	95.34	98.63	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

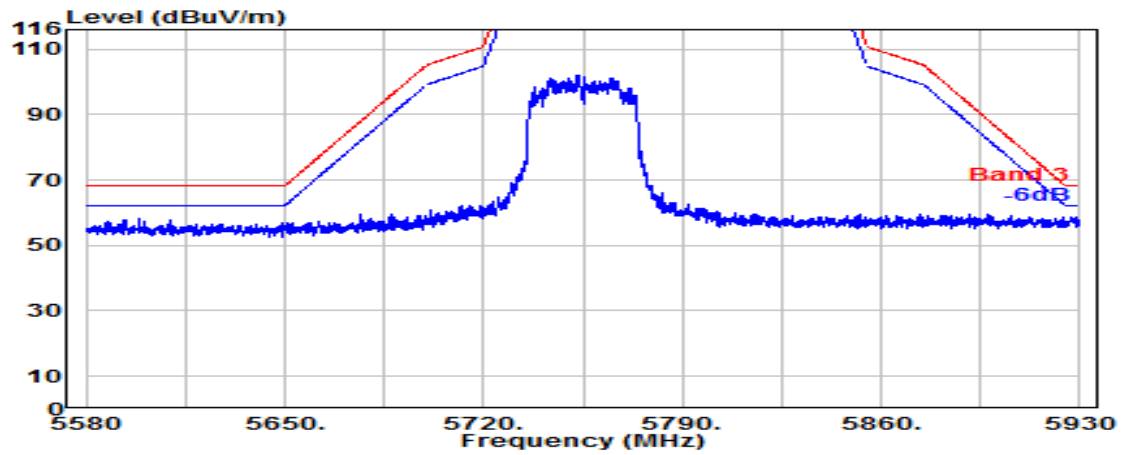

Antenna at Vertical Polarization

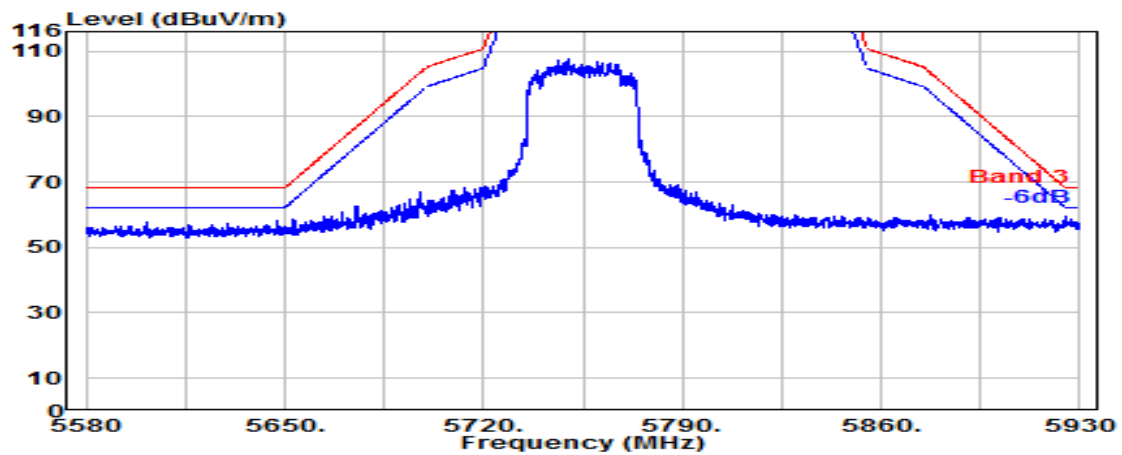


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

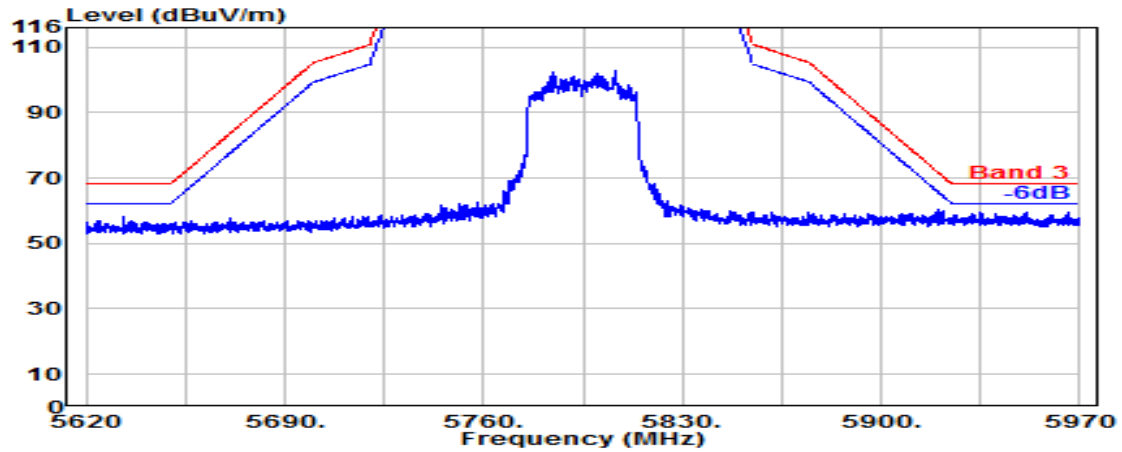


Antenna at Vertical Polarization

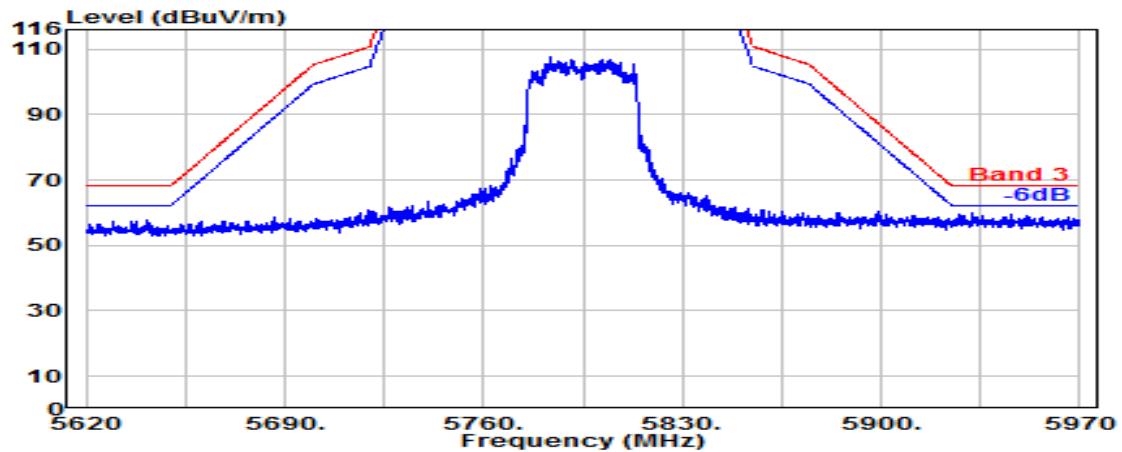

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

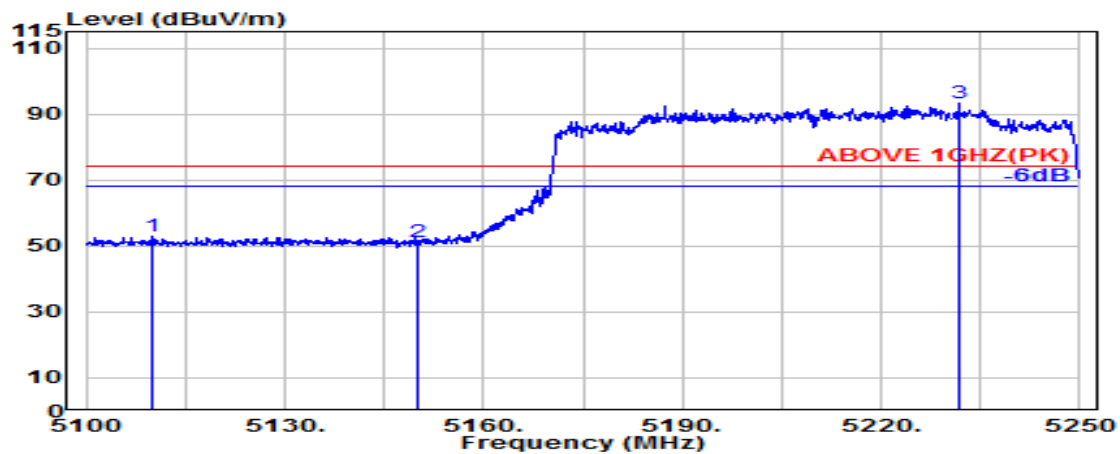

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.800	33.60	8.52	39.27	50.17	53.02	74.00	20.98	Peak
5150.000	33.60	8.54	39.27	48.52	51.39	74.00	22.61	Peak
@ 5231.700	33.70	8.59	39.27	90.23	93.25	---	---	Peak

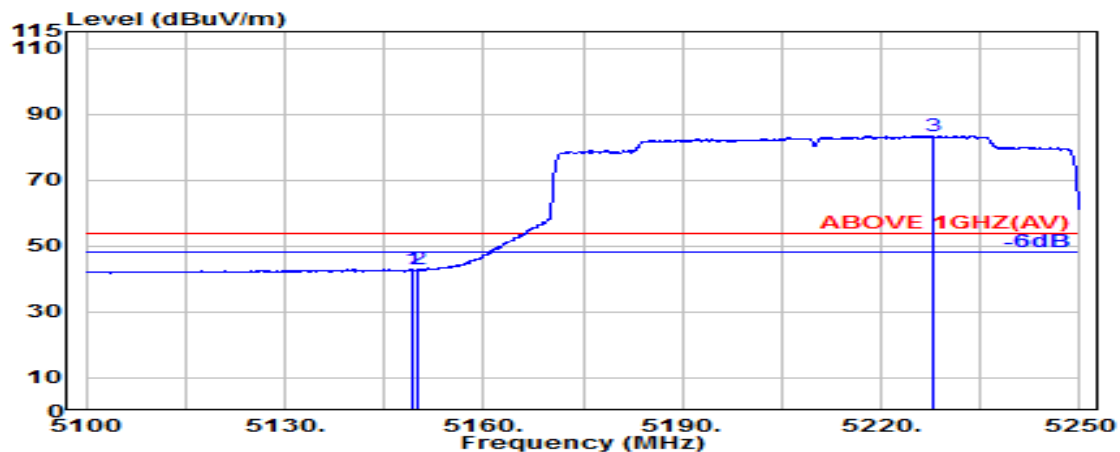

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.60	8.54	39.27	40.01	42.89	54.00	11.11	Average
5150.000	33.60	8.54	39.27	40.03	42.90	54.00	11.10	Average
@ 5227.700	33.70	8.59	39.27	80.26	83.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

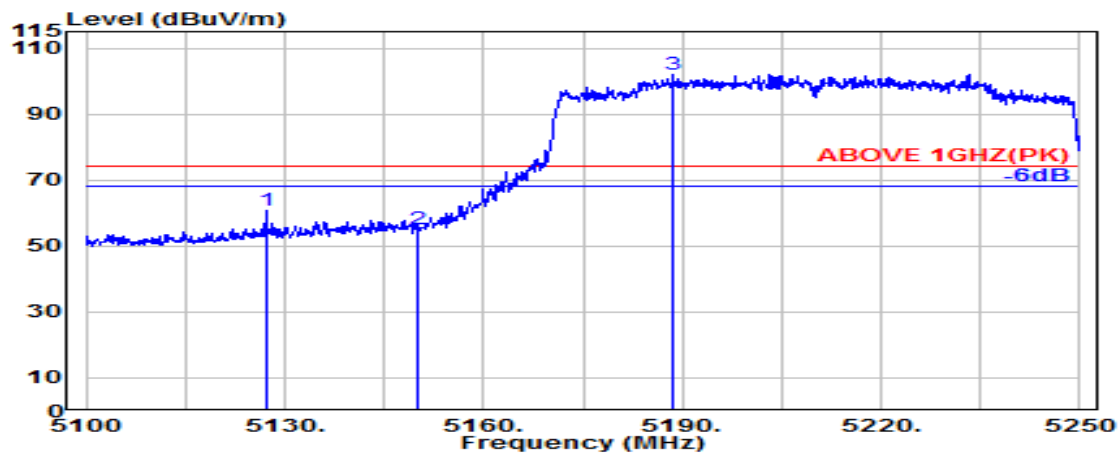

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5127.200	33.60	8.53	39.27	57.74	60.60	74.00	13.40	Peak
5150.000	33.60	8.54	39.27	52.13	55.01	74.00	18.99	Peak
@ 5188.500	33.68	8.57	39.27	99.14	102.12	---	---	Peak

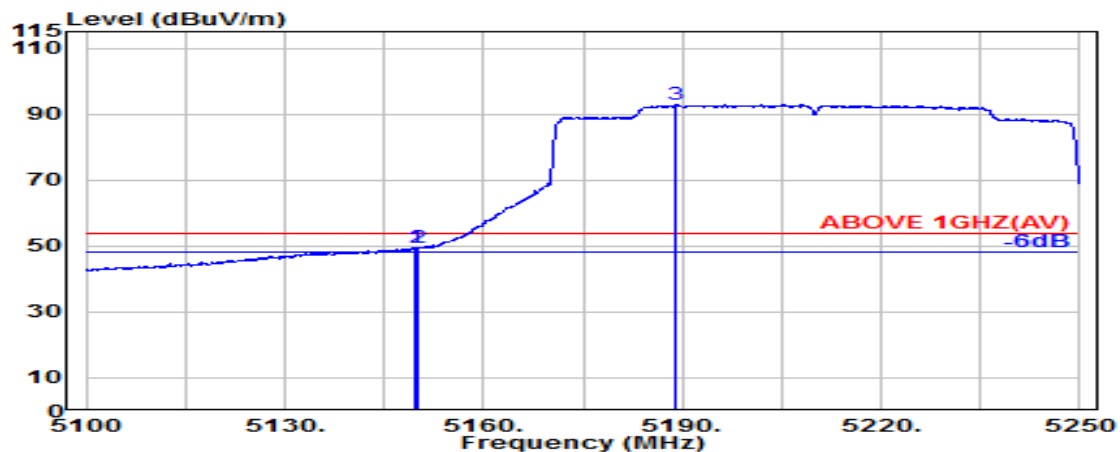

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	33.60	8.54	39.27	46.46	49.33	54.00	4.67	Average
5150.000	33.60	8.54	39.27	46.46	49.34	54.00	4.66	Average
@ 5189.000	33.68	8.57	39.27	89.75	92.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

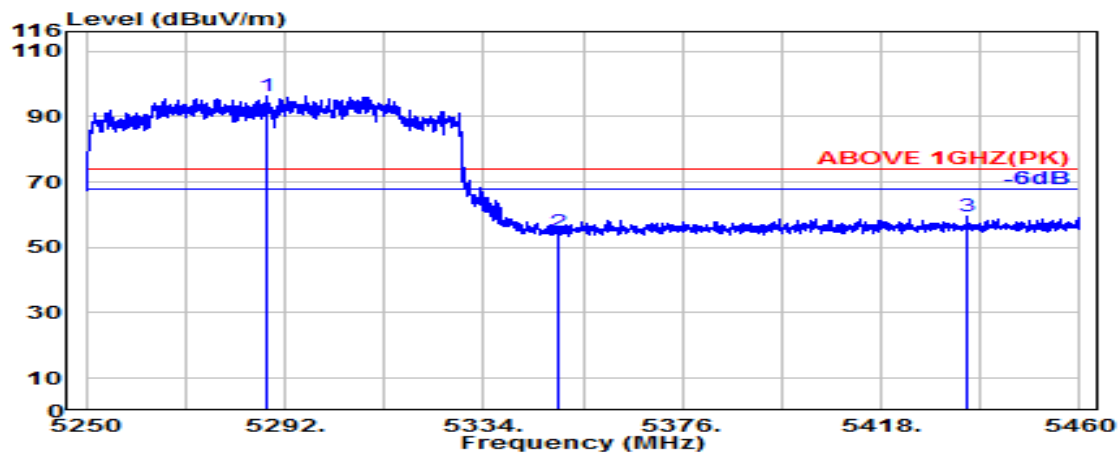

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5288.340	33.93	8.63	39.26	92.95	96.25	---	---	Peak
	5350.000	33.90	8.67	39.26	51.51	54.81	74.00	19.19	Peak
	5436.300	33.97	8.72	39.25	56.17	59.61	74.00	14.39	Peak

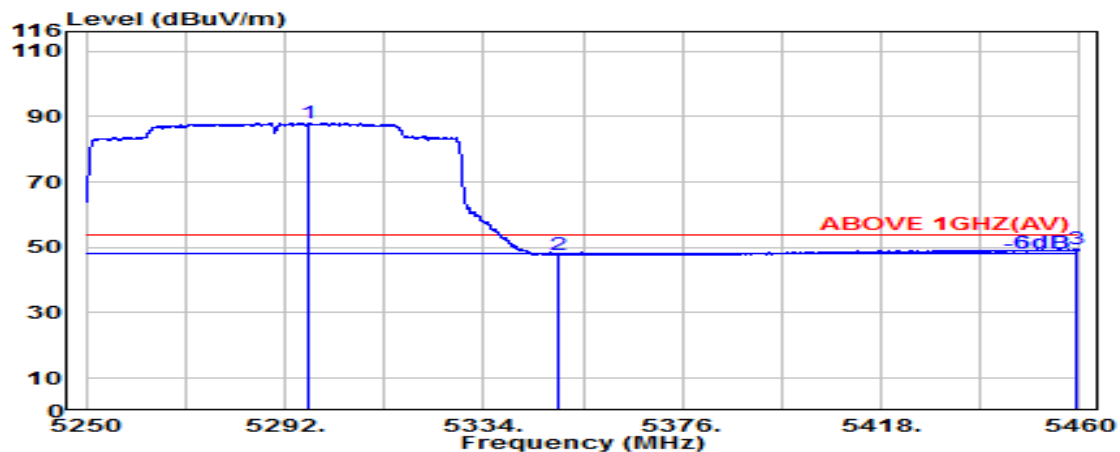

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5297.160	33.98	8.63	39.26	84.73	88.08	---	---	Average
	5350.000	33.90	8.67	39.26	44.31	47.61	54.00	6.39	Average
	5459.400	34.02	8.73	39.25	45.99	49.49	54.00	4.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

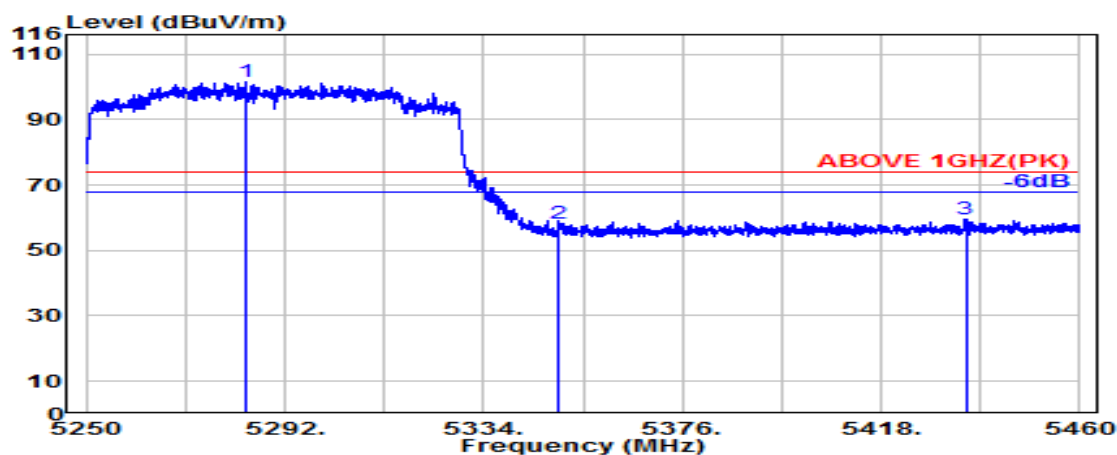

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.840	33.90	8.63	39.26	98.29	101.56	---	---	Peak
5350.000	33.90	8.67	39.26	54.91	58.21	74.00	15.79	Peak
5435.880	33.97	8.72	39.25	56.06	59.50	74.00	14.50	Peak

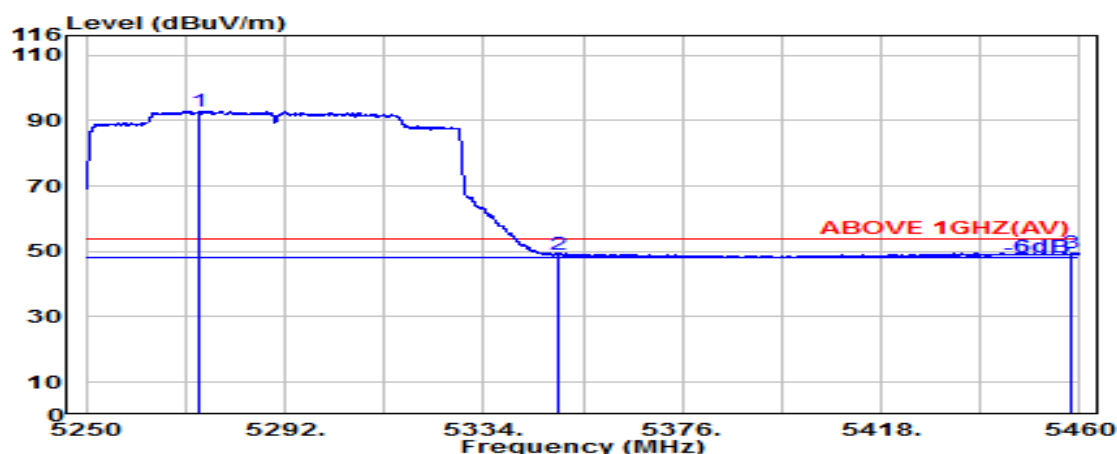

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.000	33.84	8.62	39.26	89.67	92.87	---	---	Average
5350.000	33.90	8.67	39.26	45.65	48.96	54.00	5.04	Average
5458.020	34.02	8.73	39.25	46.02	49.51	54.00	4.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

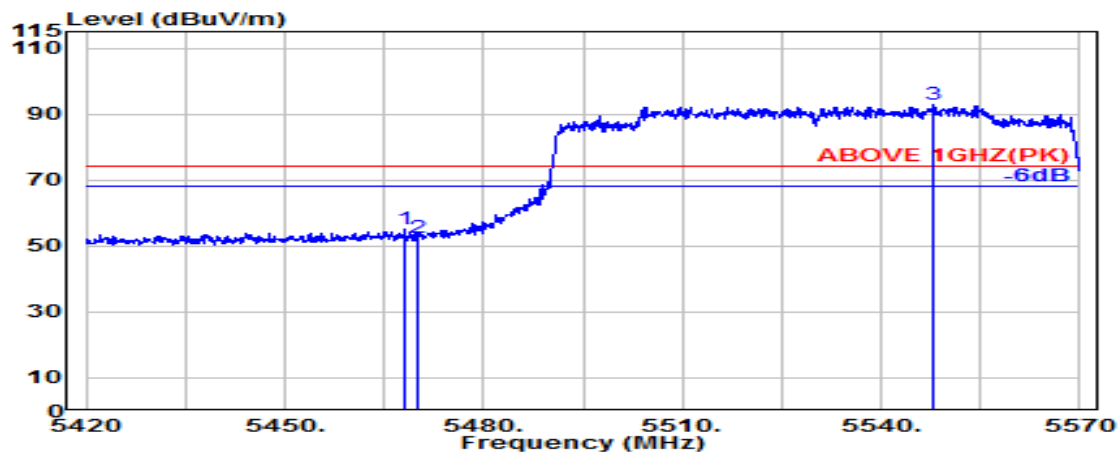

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.73	39.25	51.38	54.90	74.00	19.10	Peak
5470.000	34.04	8.74	39.25	49.15	52.67	74.00	21.33	Peak
@ 5547.800	34.00	8.78	39.26	89.39	92.92	---	---	Peak

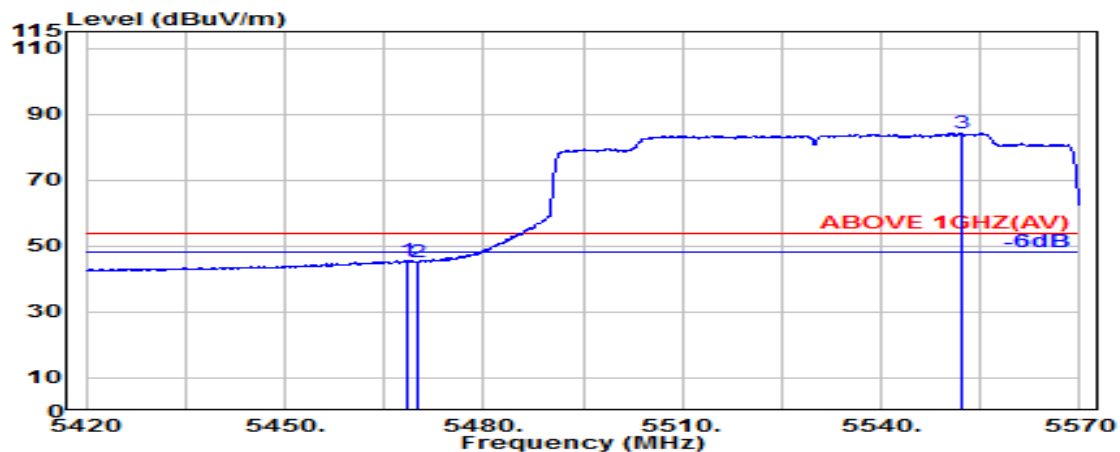


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.73	39.25	41.96	45.48	54.00	8.52	Average
5470.000	34.04	8.74	39.25	41.59	45.12	54.00	8.88	Average
@ 5552.300	33.99	8.78	39.26	80.63	84.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

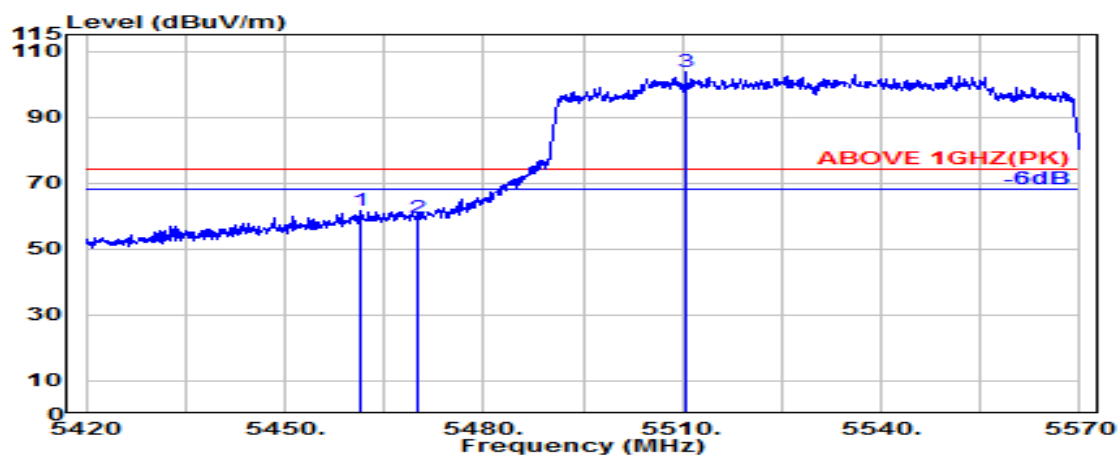

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.02	8.73	39.25	58.01	61.51	74.00	12.49	Peak
5470.000	34.04	8.74	39.25	56.06	59.58	74.00	14.42	Peak
@ 5510.600	34.08	8.76	39.25	100.14	103.72	---	---	Peak

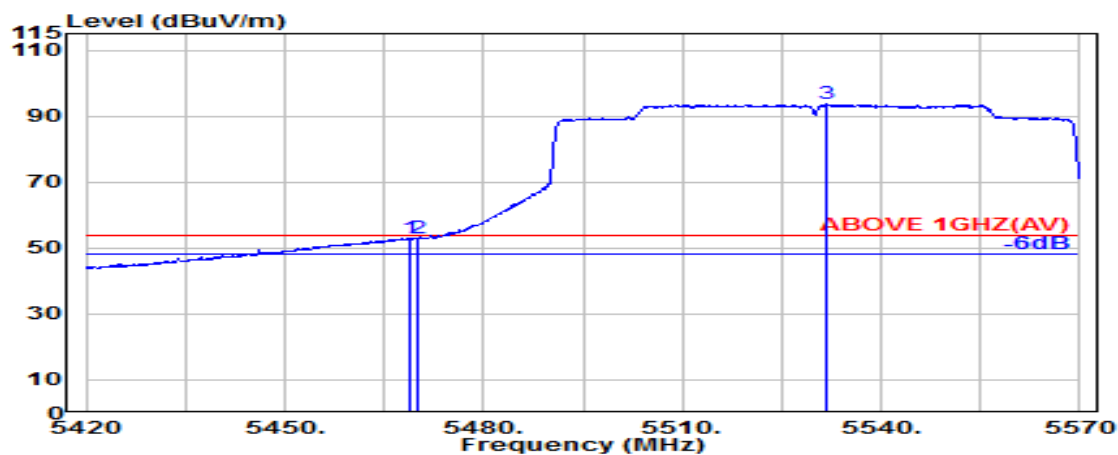

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.74	39.25	49.35	52.87	54.00	1.13	Average
5470.000	34.04	8.74	39.25	49.45	52.98	54.00	1.02	Average
@ 5531.900	34.04	8.77	39.26	90.03	93.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

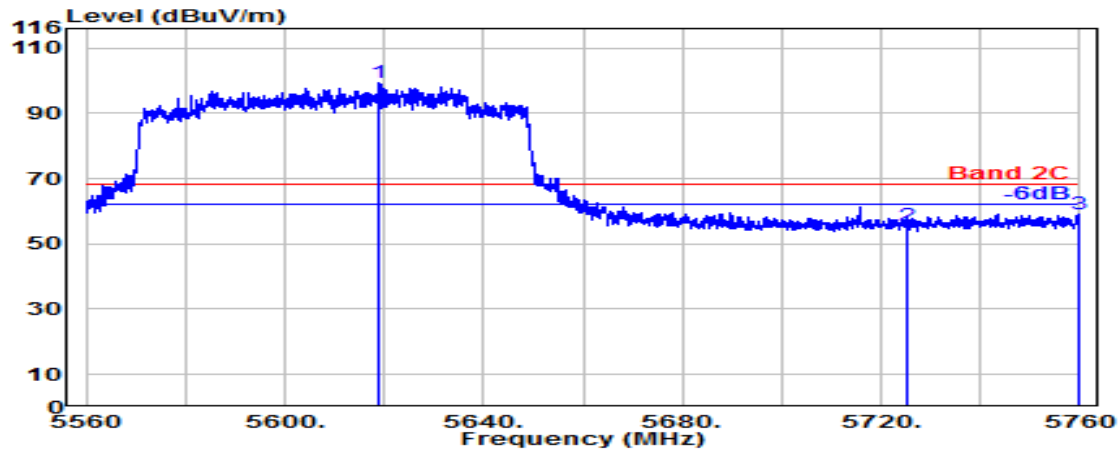

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.086	33.80	8.82	39.27	95.86	99.21	---	---	Peak
5725.000	33.70	8.88	39.29	52.50	55.79	68.20	12.41	Peak
5759.771	33.74	8.90	39.30	55.93	59.27	68.20	8.93	Peak

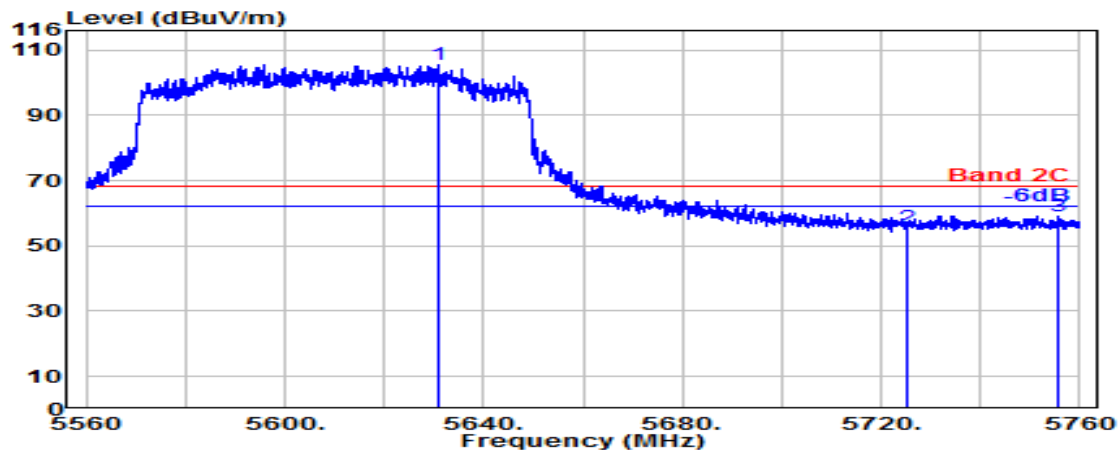

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5630.800	33.80	8.83	39.27	102.18	105.53	---	---	Peak
5725.000	33.70	8.88	39.29	52.09	55.38	68.20	12.82	Peak
5755.429	33.72	8.90	39.30	55.71	59.03	68.20	9.17	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

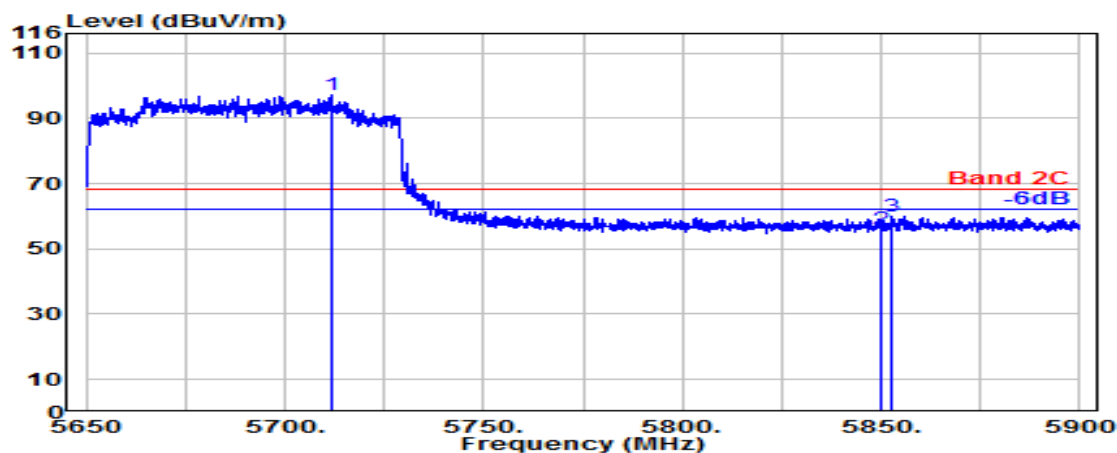

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.571	33.70	8.87	39.29	93.95	97.23	---	---	Peak
5850.000	34.00	8.95	39.31	52.52	56.15	68.20	12.05	Peak
5852.429	34.00	8.95	39.31	56.30	59.94	68.20	8.26	Peak

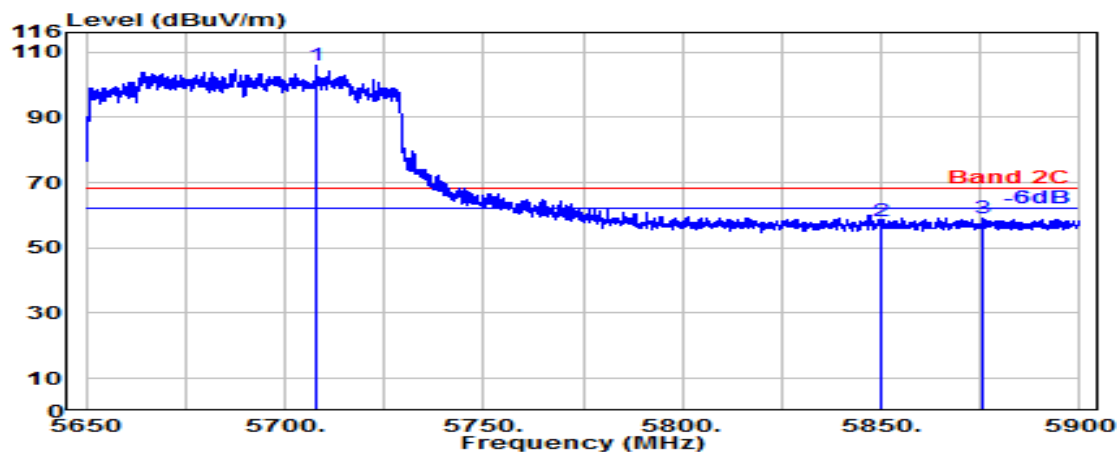

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.929	33.70	8.87	39.29	102.74	106.02	---	---	Peak
5850.000	34.00	8.95	39.31	54.72	58.35	68.20	9.85	Peak
5875.786	34.05	8.96	39.32	55.52	59.22	68.20	8.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

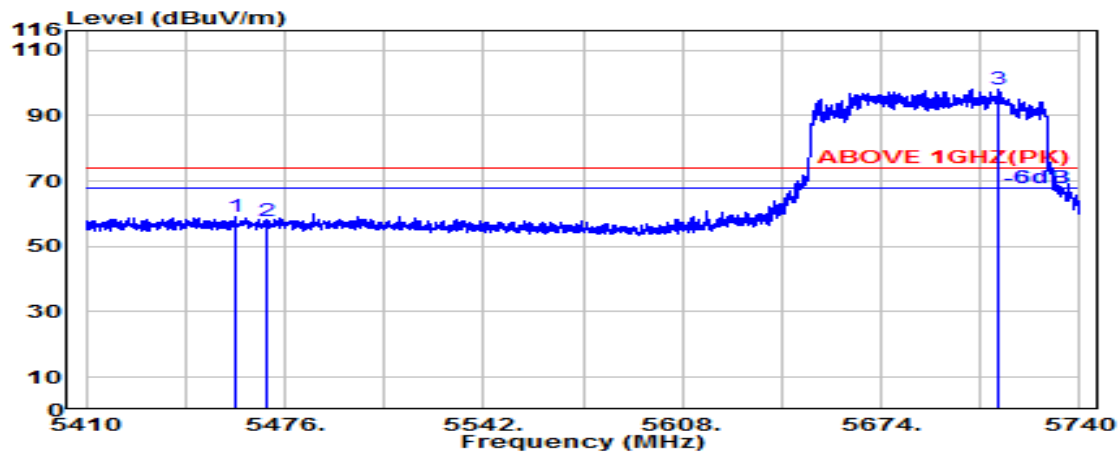

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.02	8.73	39.25	55.50	58.99	74.00	15.01	Peak
5470.000	34.04	8.74	39.25	54.09	57.61	74.00	16.39	Peak
@ 5713.223	33.70	8.87	39.29	94.80	98.08	---	---	Peak

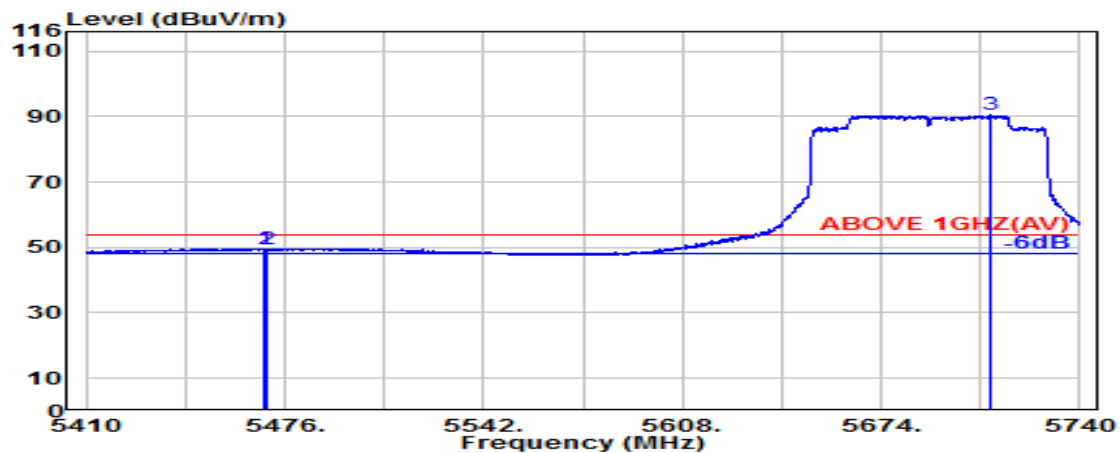

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.04	8.74	39.25	46.09	49.61	74.00	24.39	Average
5470.000	34.04	8.74	39.25	45.88	49.40	74.00	24.60	Average
@ 5710.677	33.70	8.87	39.29	87.12	90.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

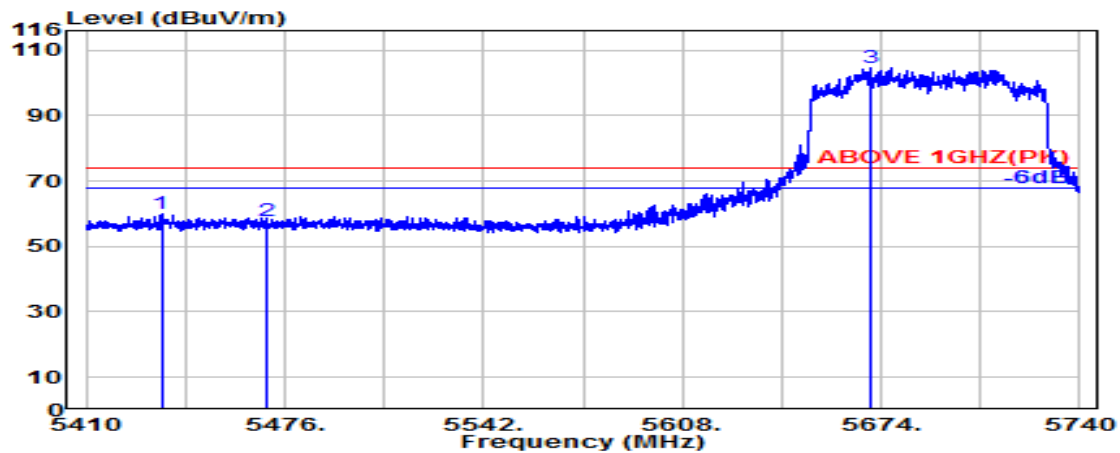

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.986	33.97	8.72	39.25	56.39	59.82	74.00	14.18	Peak
5470.000	34.04	8.74	39.25	54.18	57.71	74.00	16.29	Peak
@ 5670.417	33.76	8.85	39.28	101.19	104.52	---	---	Peak

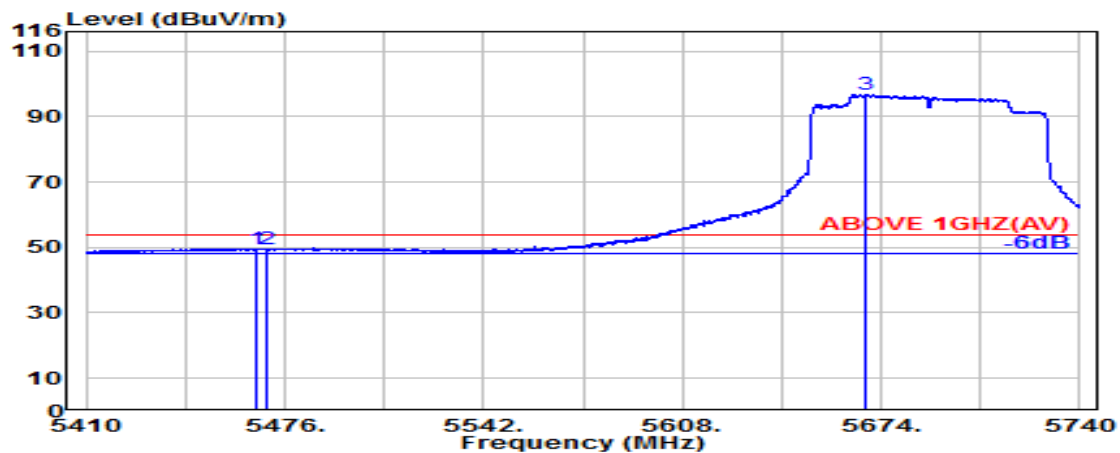

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.194	34.03	8.73	39.25	46.14	49.65	54.00	4.35	Average
5470.000	34.04	8.74	39.25	45.96	49.48	54.00	4.52	Average
@ 5668.909	33.76	8.85	39.28	93.58	96.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

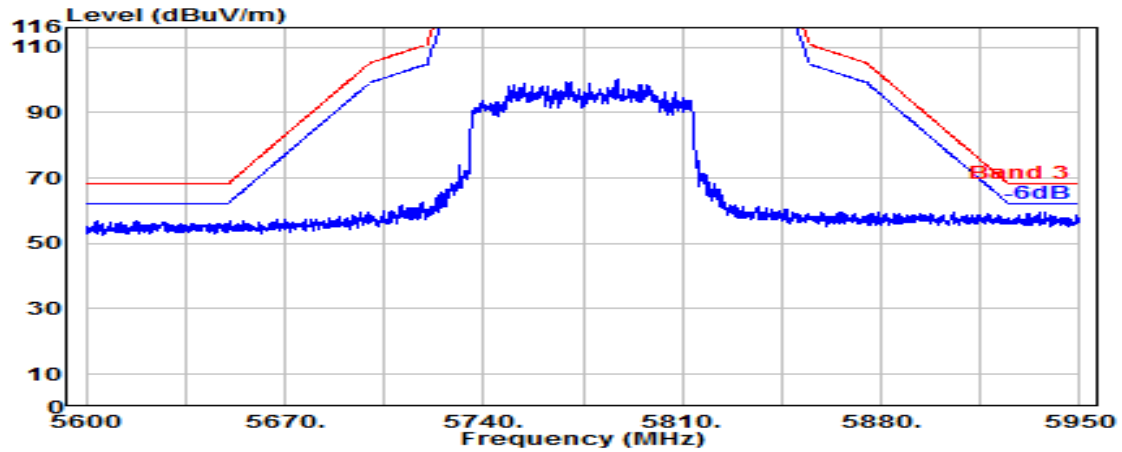

Antenna at Vertical Polarization

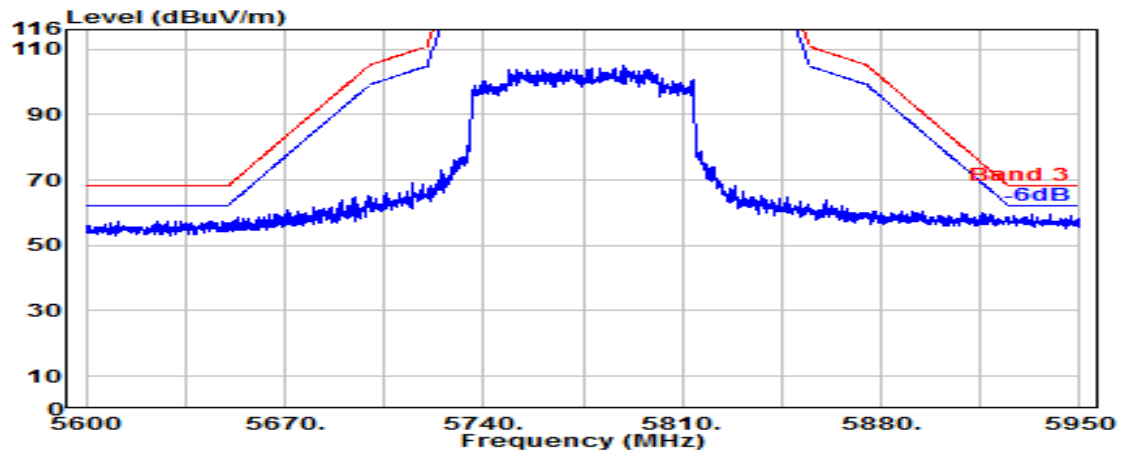


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

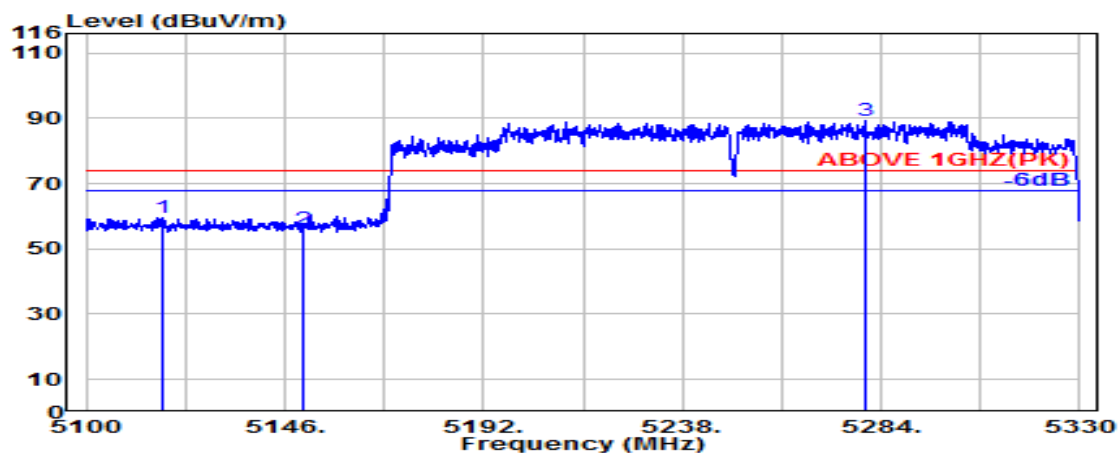

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.900	33.60	8.52	39.27	56.85	59.70	74.00	14.30	Peak
5150.000	33.60	8.54	39.27	53.04	55.91	74.00	18.09	Peak
@ 5280.400	33.88	8.62	39.26	85.99	89.23	---	---	Peak

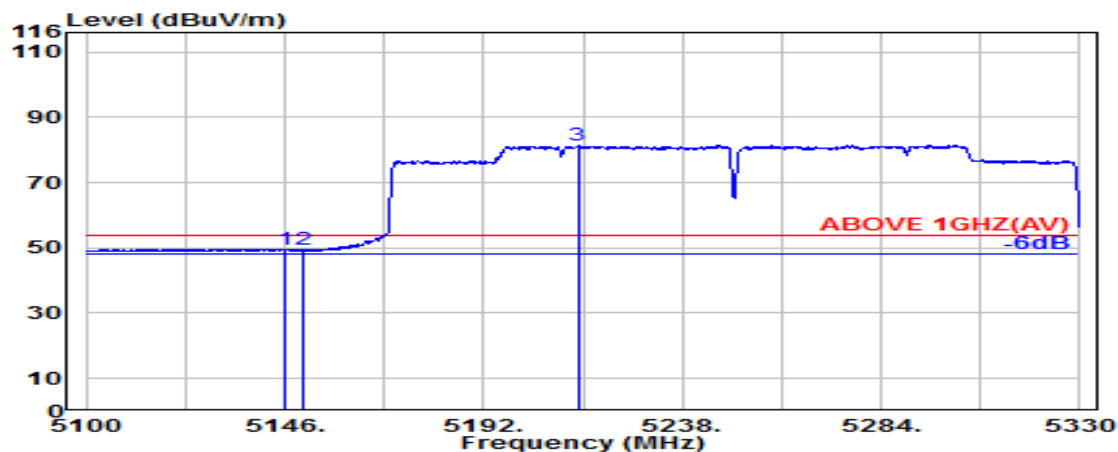


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.60	8.54	39.27	46.80	49.67	54.00	4.33	Average
5150.000	33.60	8.54	39.27	46.39	49.27	54.00	4.73	Average
@ 5213.800	33.70	8.58	39.27	78.36	81.38	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

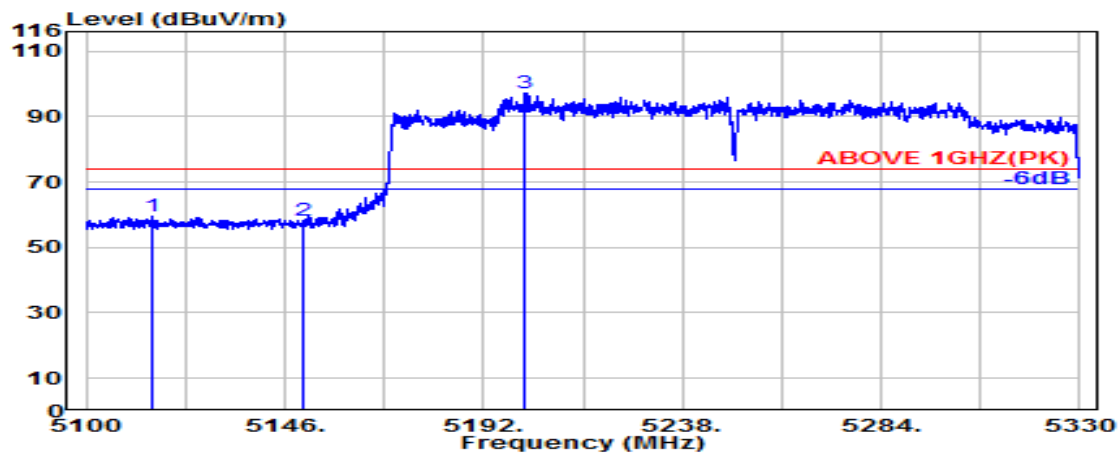

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5115.100	33.60	8.52	39.27	56.74	59.59	74.00	14.41	Peak
5150.000	33.60	8.54	39.27	55.24	58.12	74.00	15.88	Peak
@ 5201.700	33.70	8.58	39.27	94.28	97.29	---	---	Peak

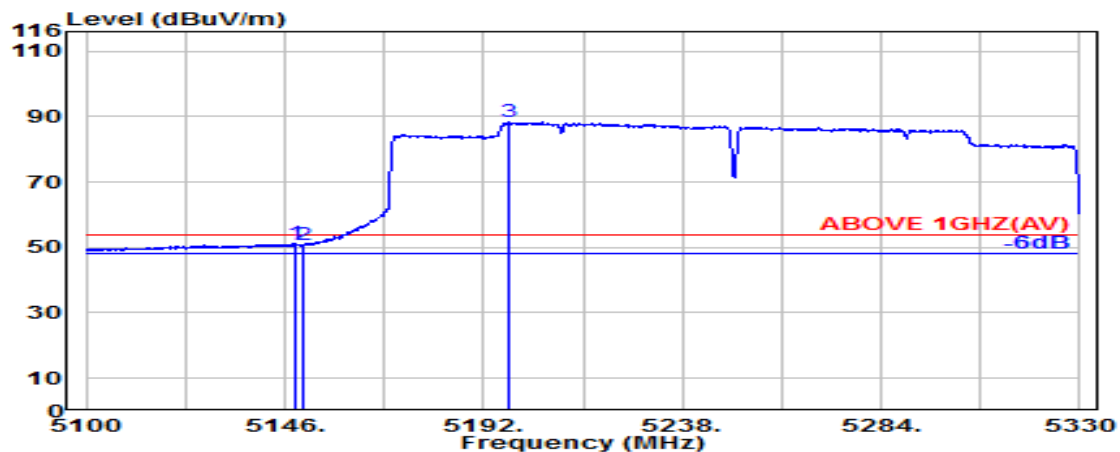

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.300	33.60	8.54	39.27	48.36	51.23	54.00	2.77	Average
5150.000	33.60	8.54	39.27	48.12	50.99	54.00	3.01	Average
@ 5197.600	33.70	8.57	39.27	85.29	88.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

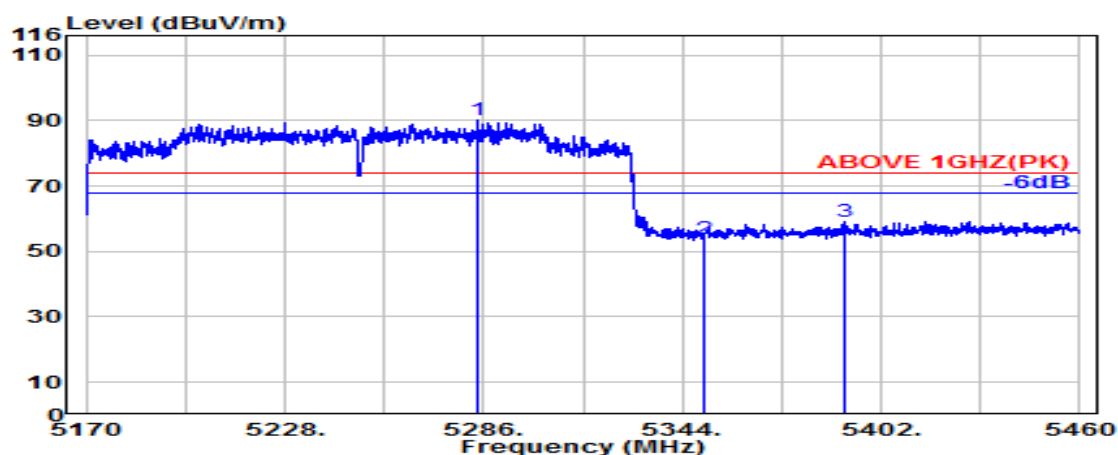

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.300	33.91	8.63	39.26	86.74	90.01	---	---	Peak
5350.000	33.90	8.67	39.26	50.70	54.00	74.00	20.00	Peak
5391.600	33.90	8.69	39.26	55.78	59.11	74.00	14.89	Peak

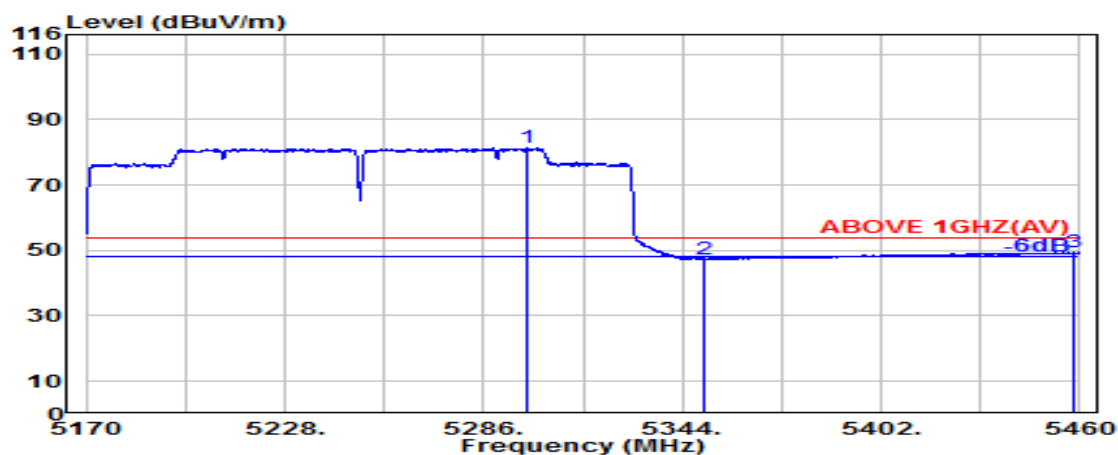


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.500	33.99	8.63	39.26	77.92	81.28	---	---	Average
5350.000	33.90	8.67	39.26	44.14	47.44	54.00	6.56	Average
5458.200	34.02	8.73	39.25	45.97	49.46	54.00	4.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

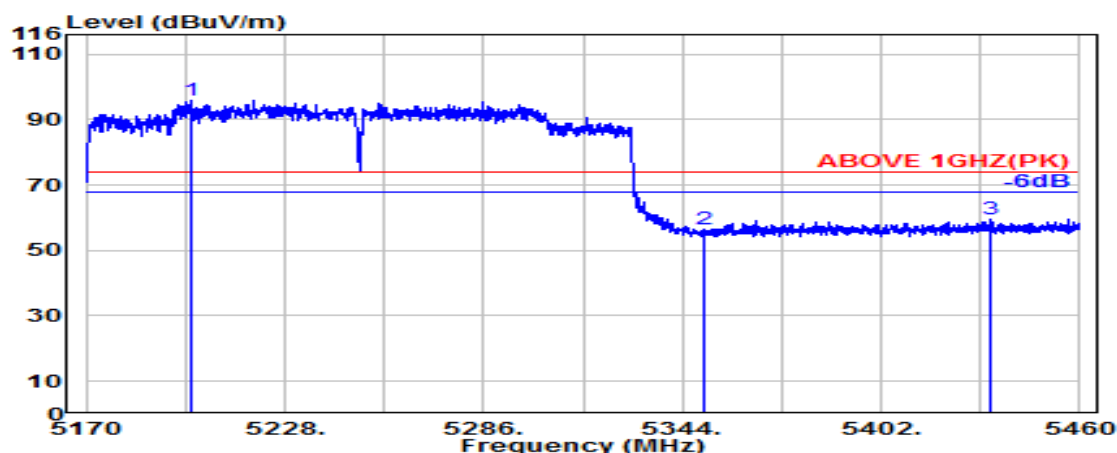

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5200.700	33.70	8.58	39.27	92.93	95.94	---	---	Peak
5350.000	33.90	8.67	39.26	53.01	56.31	74.00	17.69	Peak
5434.000	33.97	8.71	39.25	56.25	59.68	74.00	14.32	Peak

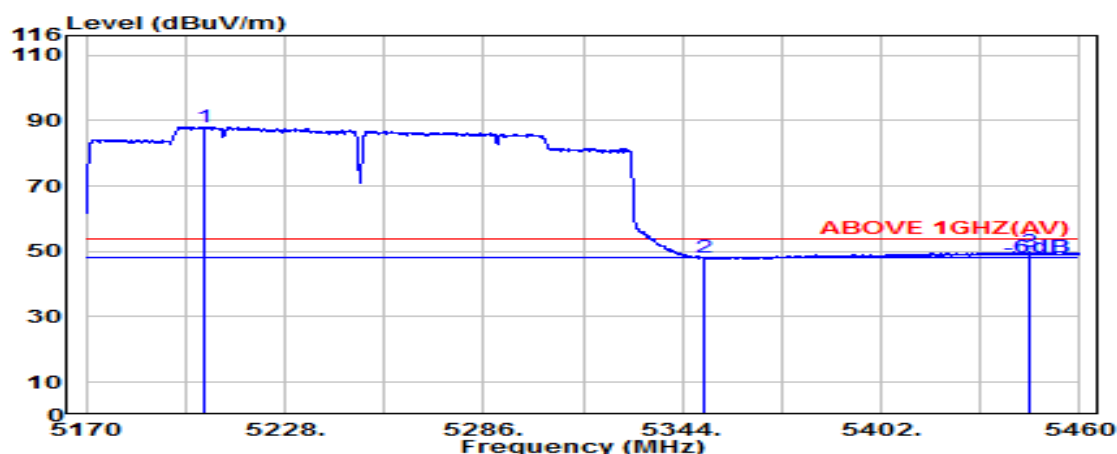


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5204.200	33.70	8.58	39.27	85.12	88.13	---	---	Average
5350.000	33.90	8.67	39.26	44.69	48.00	54.00	6.00	Average
5445.000	33.99	8.72	39.25	46.31	49.77	54.00	4.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

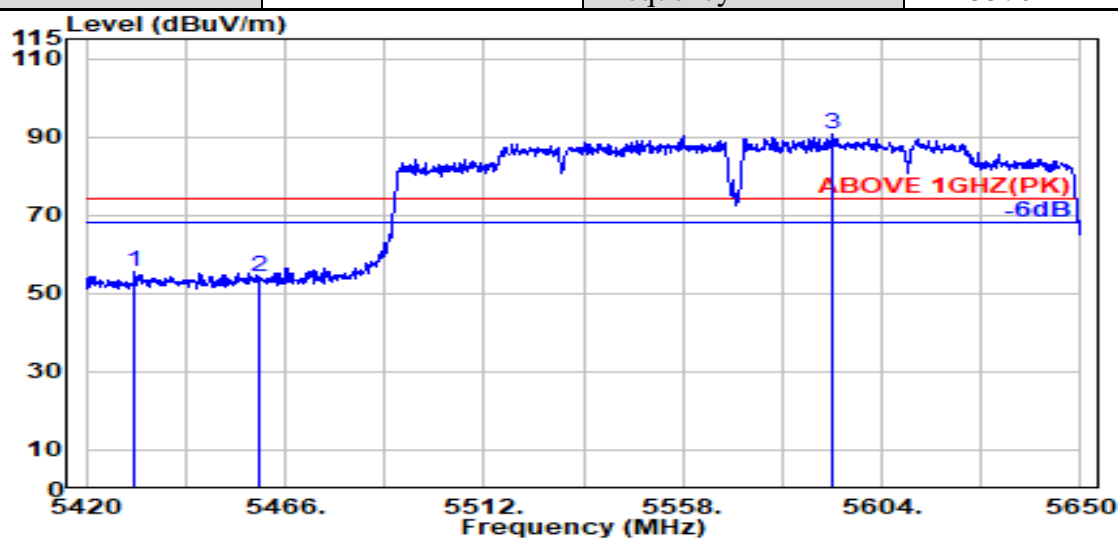

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.347	33.96	8.71	39.25	52.09	55.52	74.00	18.48	Peak
5460.020	34.02	8.73	39.25	50.70	54.20	74.00	19.80	Peak
@ 5592.807	33.83	8.81	39.27	87.14	90.51	---	---	Peak

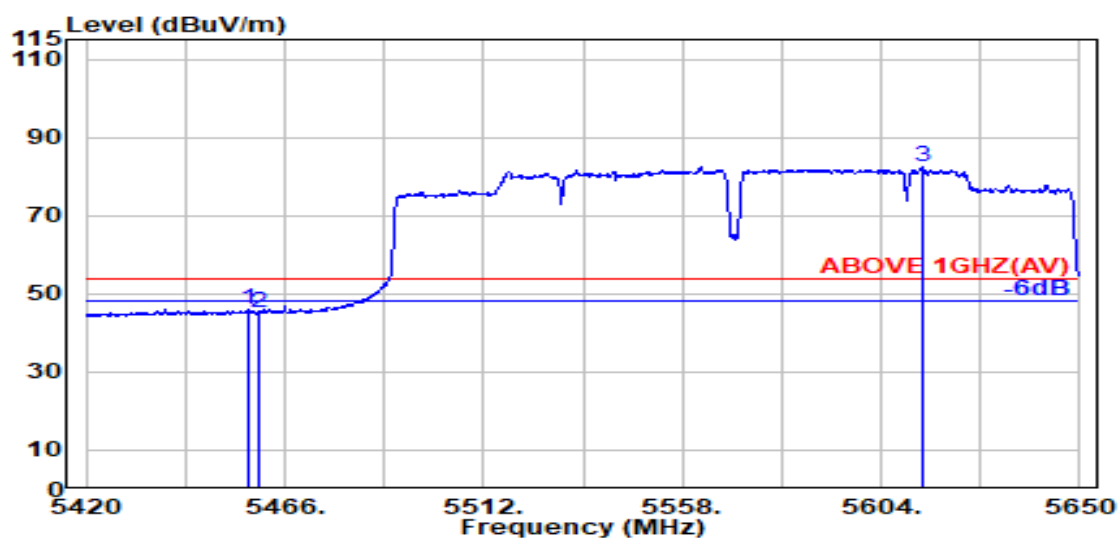


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.414	34.01	8.73	39.25	42.37	45.86	54.00	8.14	Average
5460.020	34.02	8.73	39.25	41.64	45.13	54.00	8.87	Average
@ 5613.507	33.80	8.82	39.27	79.09	82.44	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

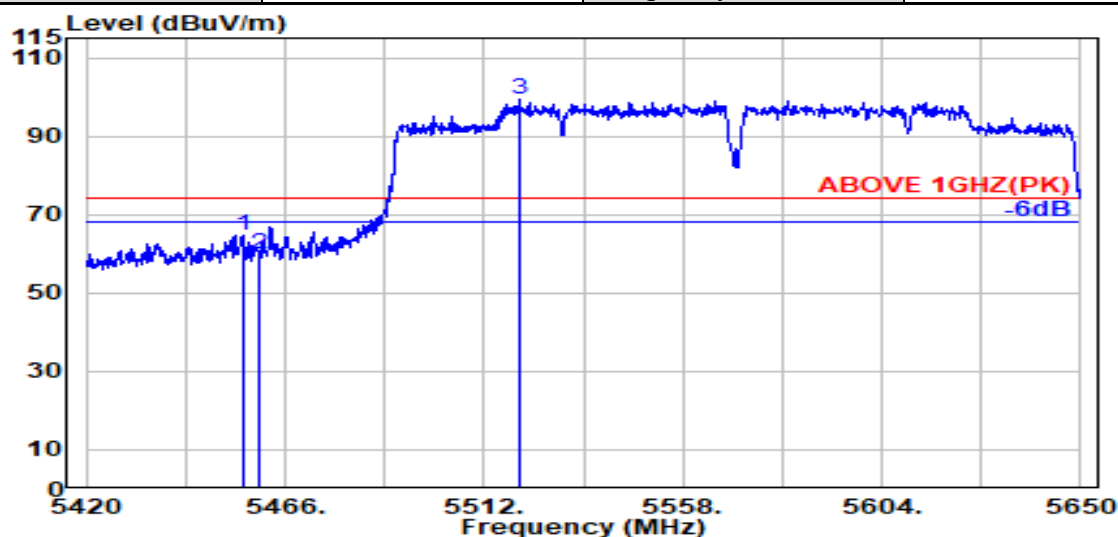

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.340	34.01	8.73	39.25	61.27	64.76	74.00	9.24	Peak
5460.020	34.02	8.73	39.25	56.33	59.83	74.00	14.17	Peak
@ 5519.973	34.06	8.76	39.25	95.85	99.42	---	---	Peak

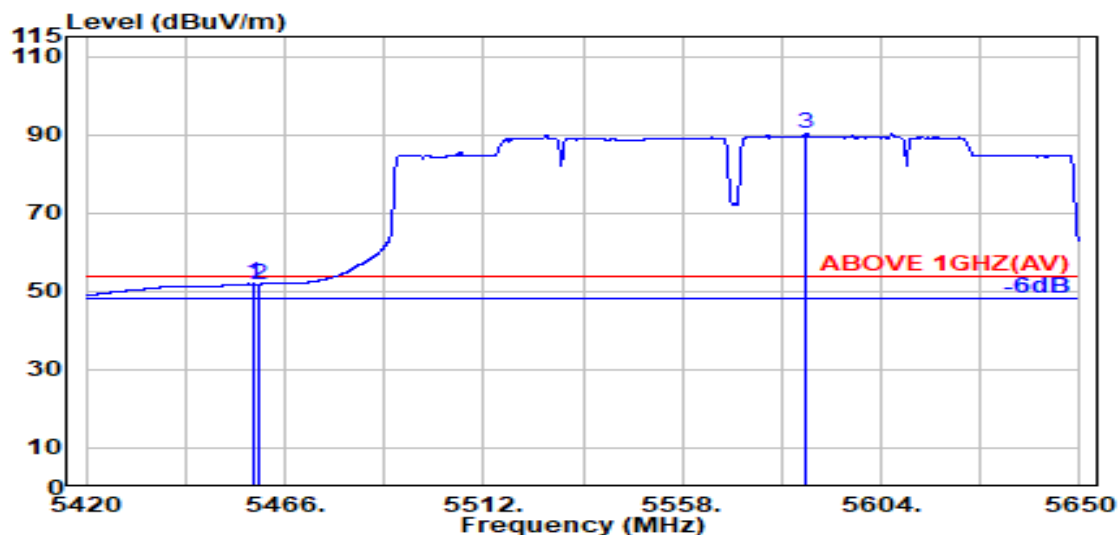


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.947	34.02	8.73	39.25	48.38	51.88	54.00	2.12	Average
5460.020	34.02	8.73	39.25	48.25	51.75	54.00	2.25	Average
@ 5586.520	33.85	8.80	39.27	86.93	90.32	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

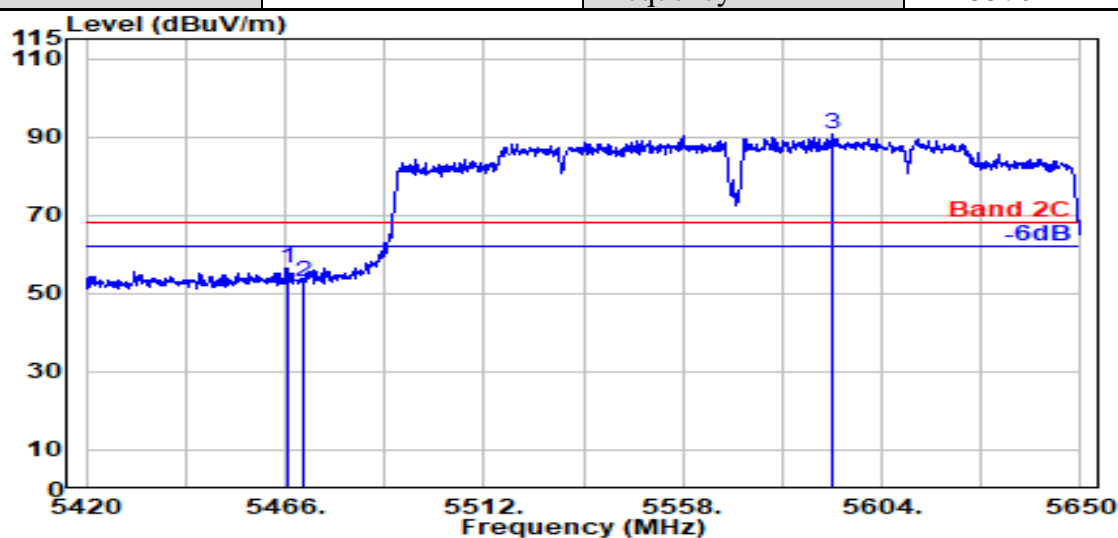

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.460	34.03	8.73	39.25	52.94	56.45	68.20	11.75	Peak
5469.987	34.04	8.74	39.25	49.41	52.93	68.20	15.27	Peak
@ 5592.807	33.83	8.81	39.27	87.14	90.51	---	---	Peak

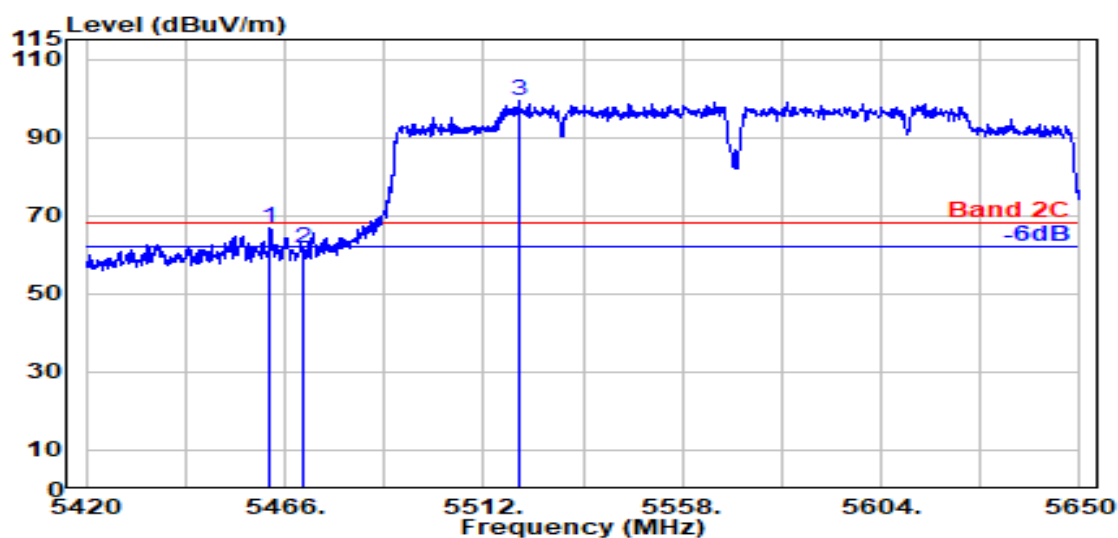

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.626	34.03	8.73	39.25	63.16	66.66	68.20	1.54	Peak
5469.987	34.04	8.74	39.25	57.92	61.45	68.20	6.75	Peak
@ 5519.973	34.06	8.76	39.25	95.85	99.42	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

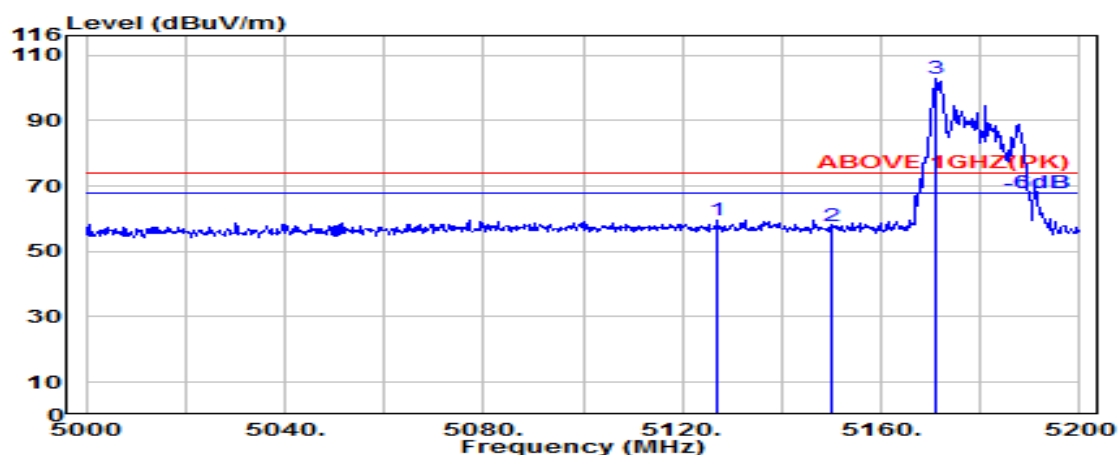

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5127.000	33.60	8.53	39.27	56.84	59.70	74.00	14.30	Peak
5150.000	33.60	8.54	39.27	55.12	58.00	74.00	16.00	Peak
@ 5170.800	33.64	8.56	39.27	99.87	102.80	---	---	Peak

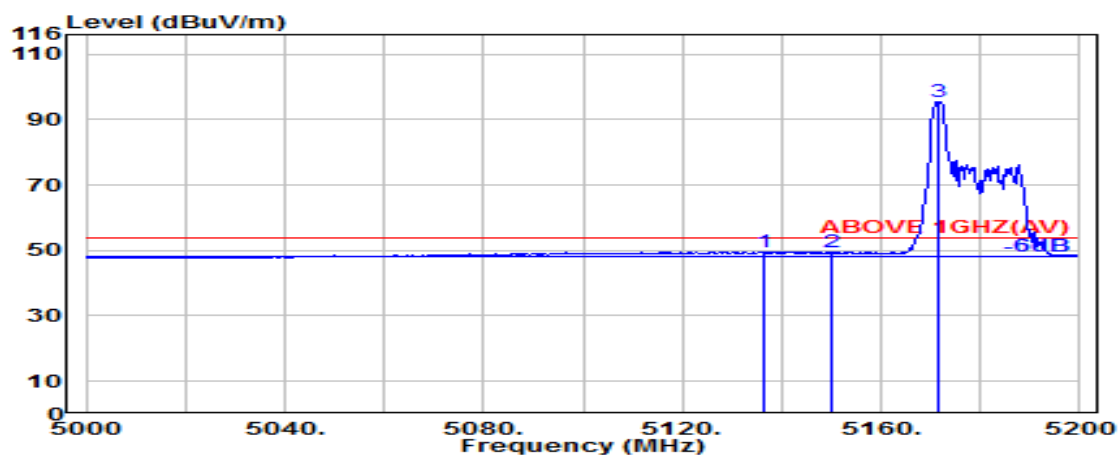

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5136.400	33.60	8.54	39.27	46.71	49.57	54.00	4.43	Average
5150.000	33.60	8.54	39.27	46.38	49.25	54.00	4.75	Average
@ 5171.600	33.64	8.56	39.27	92.60	95.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

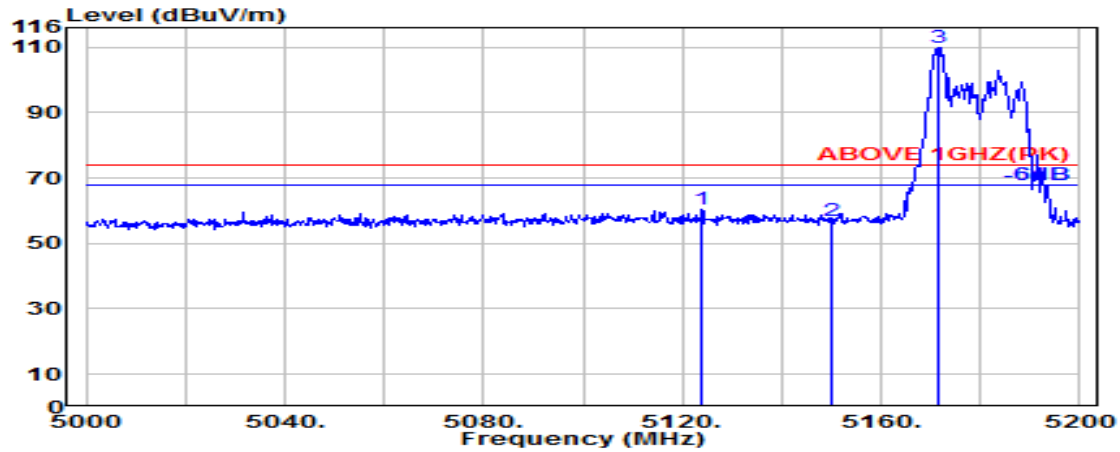

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5124.000	33.60	8.53	39.27	57.34	60.19	74.00	13.81	Peak
5150.000	33.60	8.54	39.27	54.24	57.11	74.00	16.89	Peak
@ 5171.600	33.64	8.56	39.27	107.11	110.04	---	---	Peak

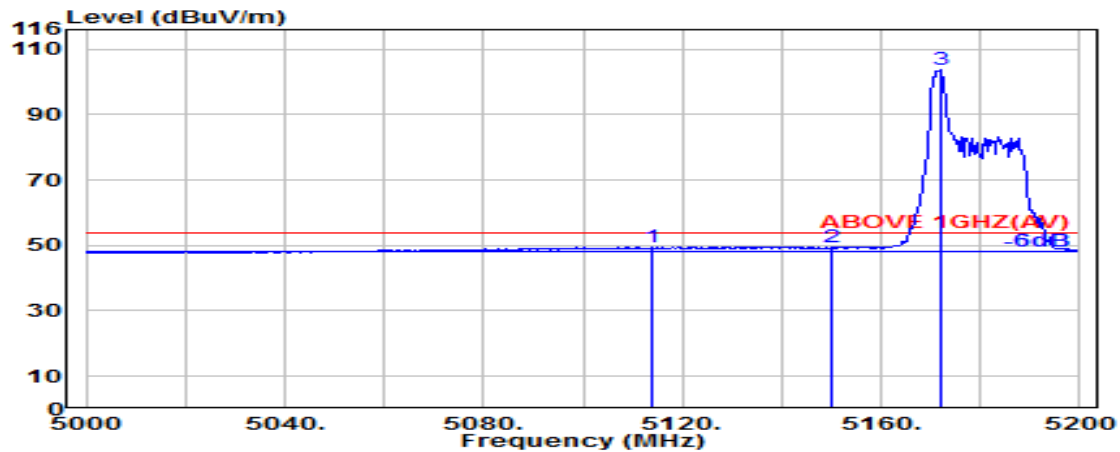

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5113.800	33.60	8.52	39.27	46.72	49.57	54.00	4.43	Average
5150.000	33.60	8.54	39.27	46.44	49.32	54.00	4.68	Average
@ 5172.000	33.64	8.56	39.27	100.84	103.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

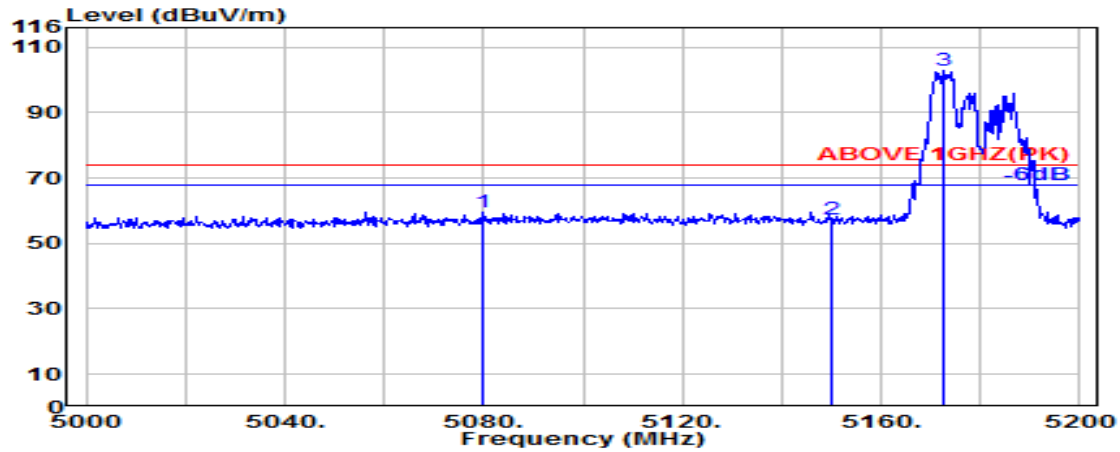

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5079.600	33.56	8.50	39.28	56.61	59.40	74.00	14.60	Peak
5150.000	33.60	8.54	39.27	54.56	57.43	74.00	16.57	Peak
@ 5172.600	33.65	8.56	39.27	100.01	102.95	---	---	Peak

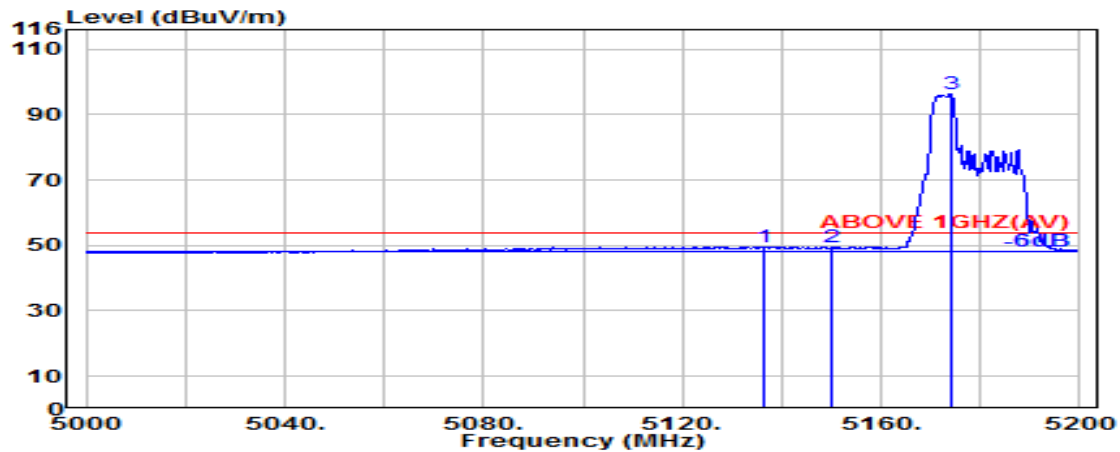

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.600	33.60	8.54	39.27	46.66	49.53	54.00	4.47	Average
5150.000	33.60	8.54	39.27	46.41	49.28	54.00	4.72	Average
@ 5174.000	33.65	8.56	39.27	93.27	96.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

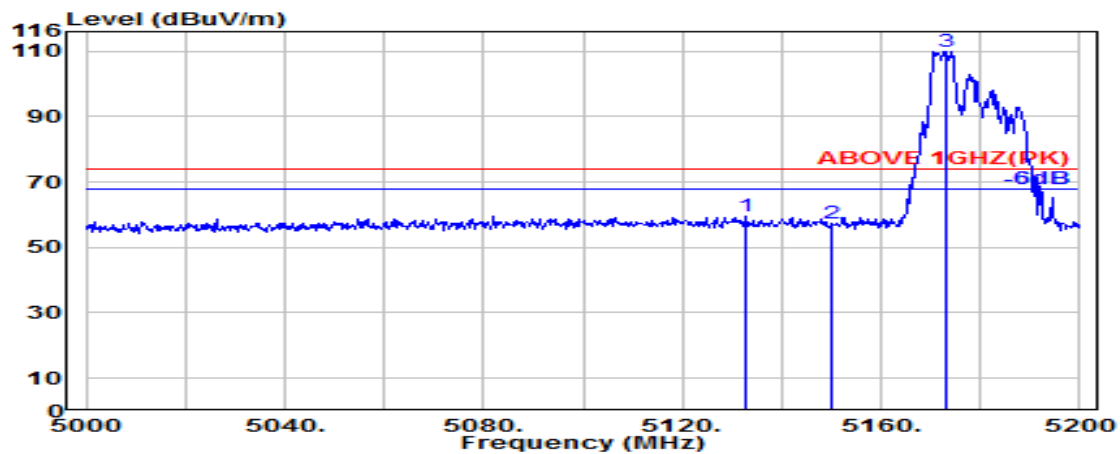

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.000	33.60	8.53	39.27	56.54	59.40	74.00	14.60	Peak
5150.000	33.60	8.54	39.27	54.65	57.52	74.00	16.48	Peak
@ 5173.200	33.65	8.56	39.27	107.15	110.08	---	---	Peak

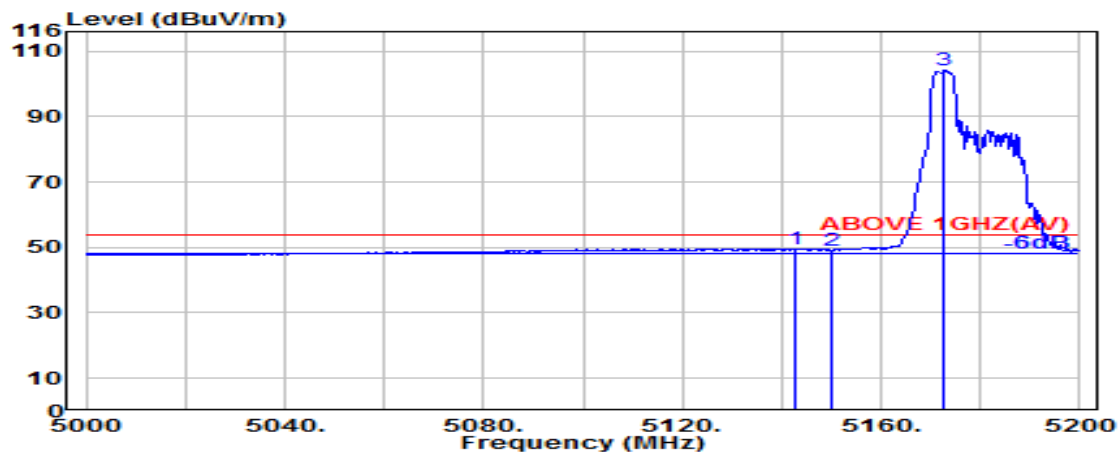

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.800	33.60	8.54	39.27	46.75	49.61	54.00	4.39	Average
5150.000	33.60	8.54	39.27	46.28	49.15	54.00	4.85	Average
@ 5172.800	33.65	8.56	39.27	101.19	104.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

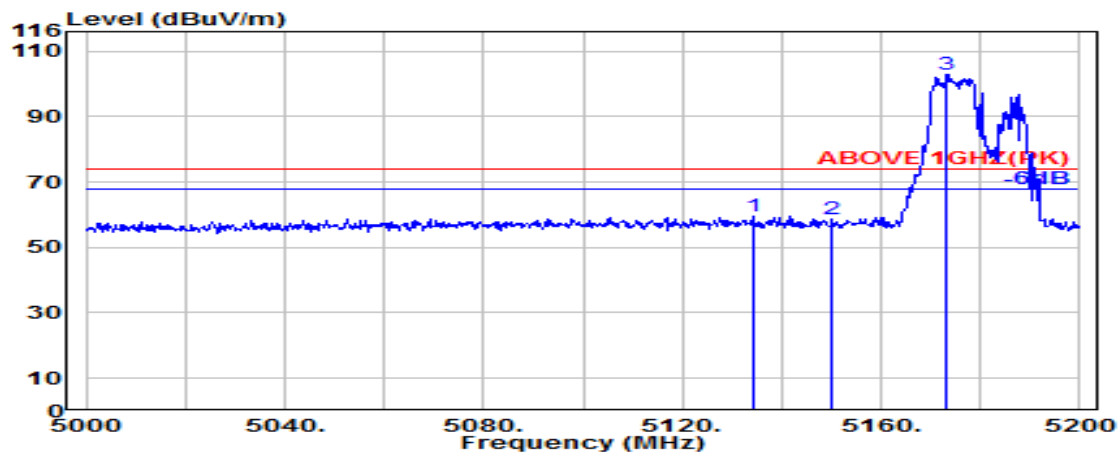

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.200	33.60	8.53	39.27	56.62	59.49	74.00	14.51	Peak
5150.000	33.60	8.54	39.27	55.70	58.57	74.00	15.43	Peak
@ 5173.200	33.65	8.56	39.27	99.89	102.83	---	---	Peak

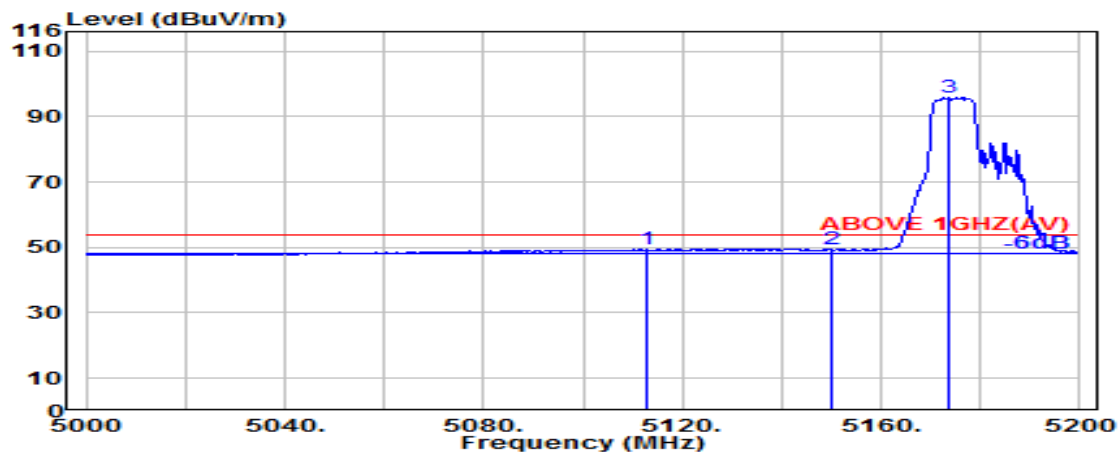

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.800	33.60	8.52	39.27	46.75	49.60	54.00	4.40	Average
5150.000	33.60	8.54	39.27	46.47	49.35	54.00	4.65	Average
@ 5173.800	33.65	8.56	39.27	92.82	95.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

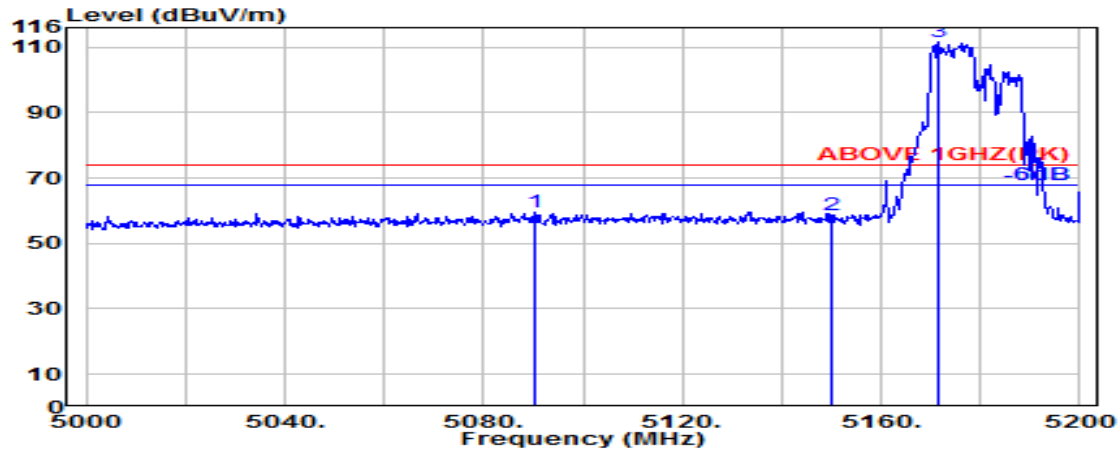

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5090.200	33.58	8.51	39.27	56.87	59.68	74.00	14.32	Peak
5150.000	33.60	8.54	39.27	55.58	58.45	74.00	15.55	Peak
@ 5171.400	33.64	8.56	39.27	108.50	111.43	---	---	Peak

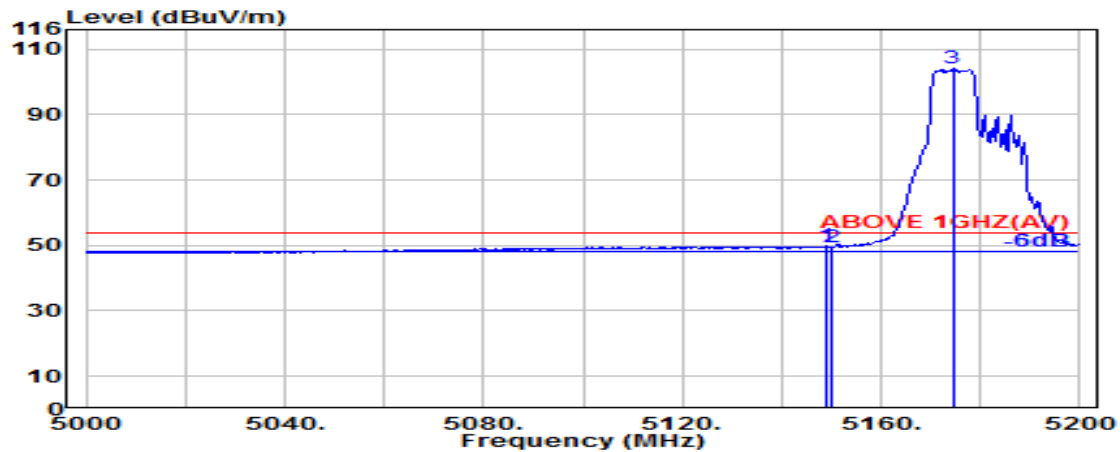

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.60	8.54	39.27	47.04	49.91	54.00	4.09	Average
5150.000	33.60	8.54	39.27	46.78	49.65	54.00	4.35	Average
@ 5174.400	33.65	8.56	39.27	101.17	104.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

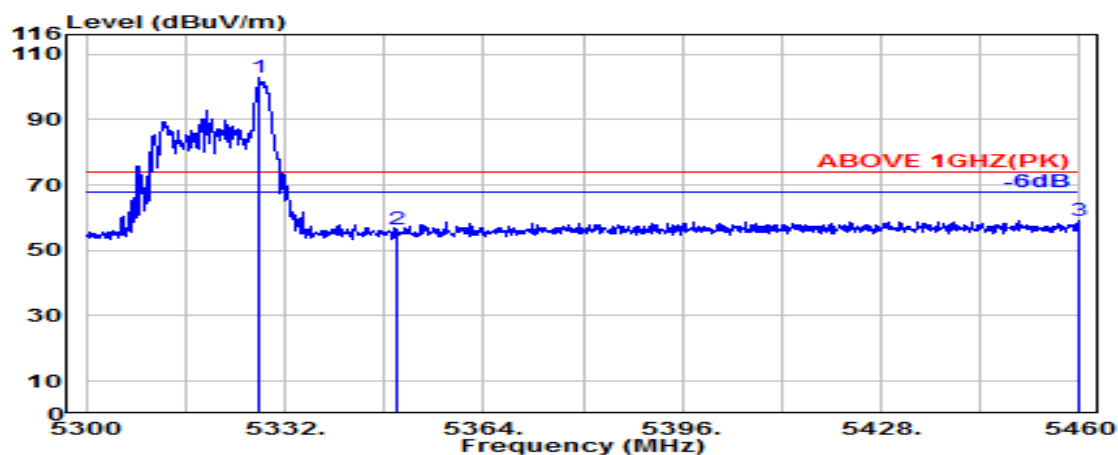

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.94	8.65	39.26	99.53	102.87	---	---	Peak
5350.000	33.90	8.67	39.26	53.07	56.37	74.00	17.63	Peak
5459.700	34.02	8.73	39.25	55.80	59.29	74.00	14.71	Peak

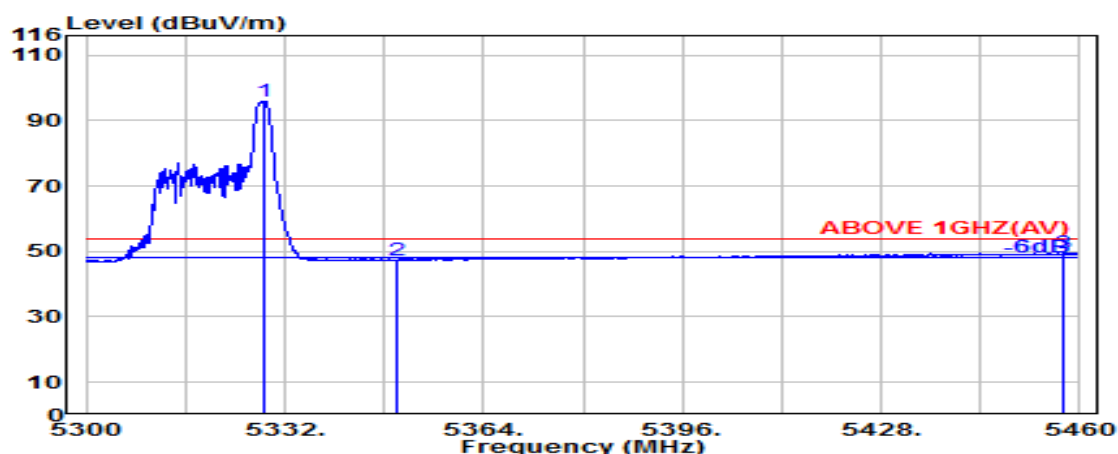

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	33.94	8.65	39.26	92.55	95.89	---	---	Average
5350.000	33.90	8.67	39.26	44.16	47.47	54.00	6.53	Average
5457.400	34.01	8.73	39.25	46.12	49.61	54.00	4.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

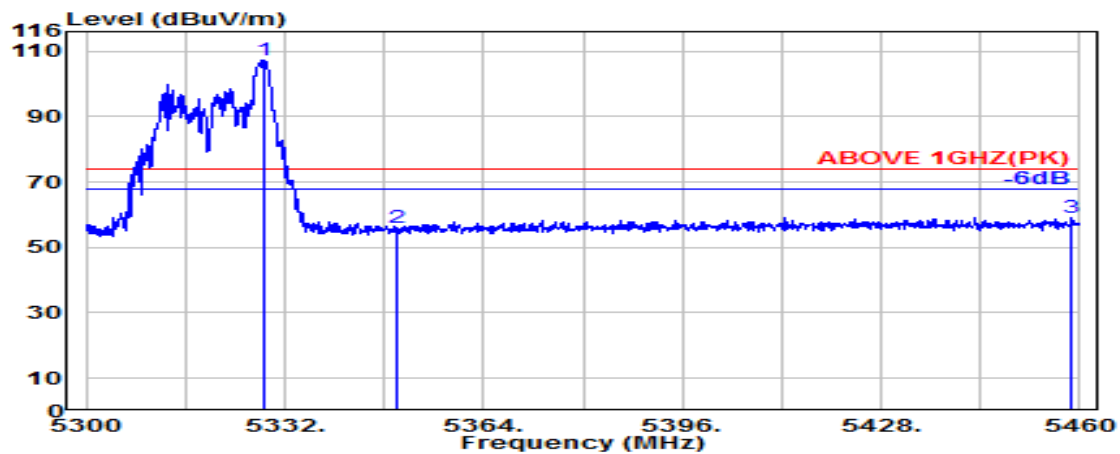

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.94	8.65	39.26	103.75	107.09	---	---	Peak
5350.000	33.90	8.67	39.26	52.93	56.24	74.00	17.76	Peak
5458.500	34.02	8.73	39.25	55.50	58.99	74.00	15.01	Peak

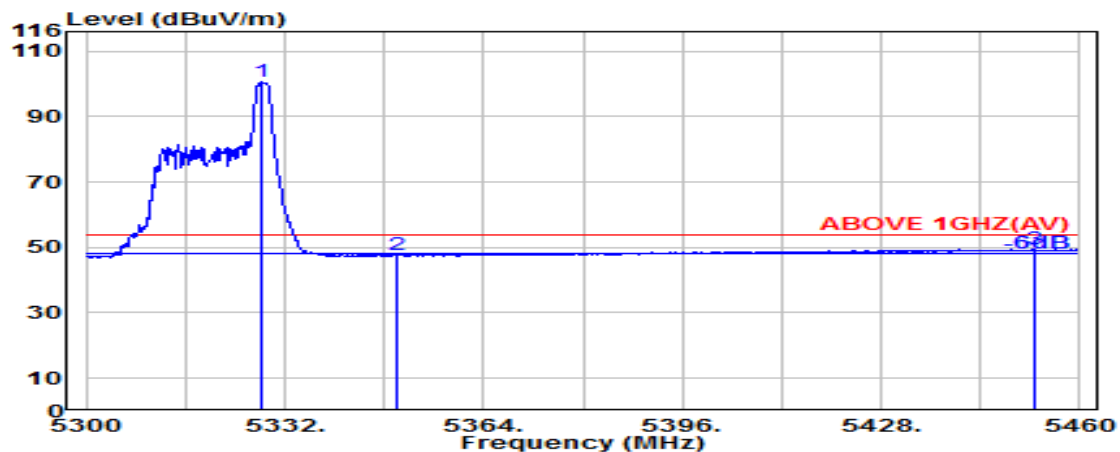

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.94	8.65	39.26	97.15	100.49	---	---	Average
5350.000	33.90	8.67	39.26	44.41	47.72	54.00	6.28	Average
5452.900	34.01	8.73	39.25	45.81	49.29	54.00	4.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

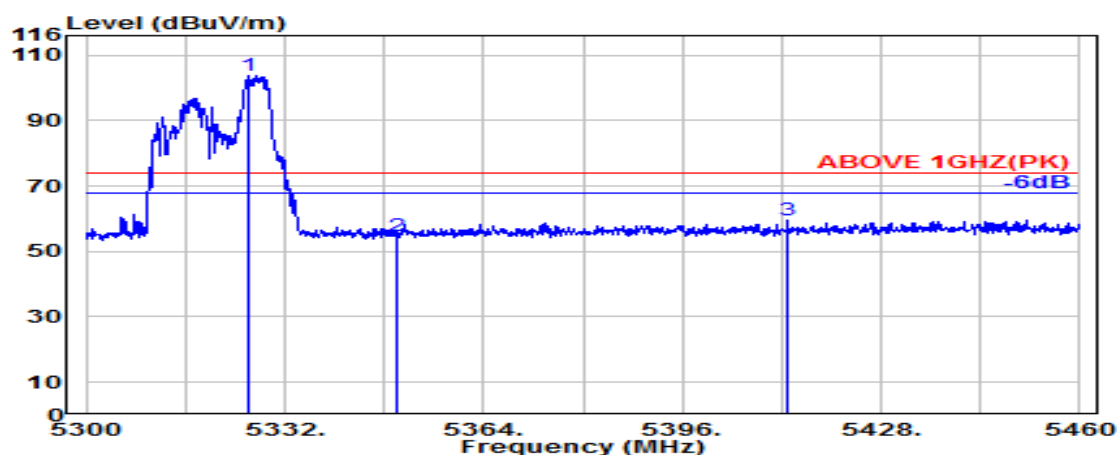

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	33.95	8.65	39.26	100.61	103.95	---	---	Peak
5350.000	33.90	8.67	39.26	51.51	54.82	74.00	19.18	Peak
5413.000	33.93	8.70	39.26	56.16	59.53	74.00	14.47	Peak

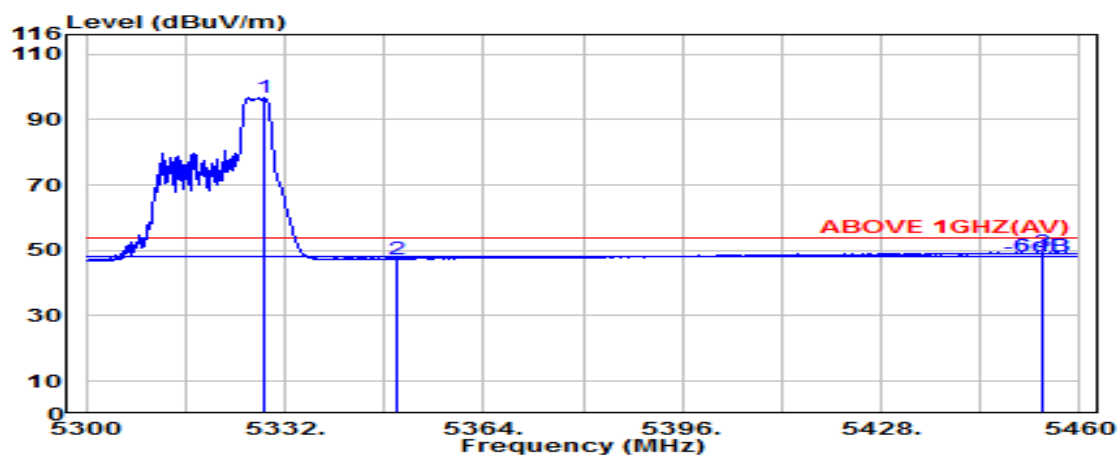

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.94	8.65	39.26	93.32	96.66	---	---	Average
5350.000	33.90	8.67	39.26	44.13	47.43	54.00	6.57	Average
5453.900	34.01	8.73	39.25	45.95	49.44	54.00	4.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

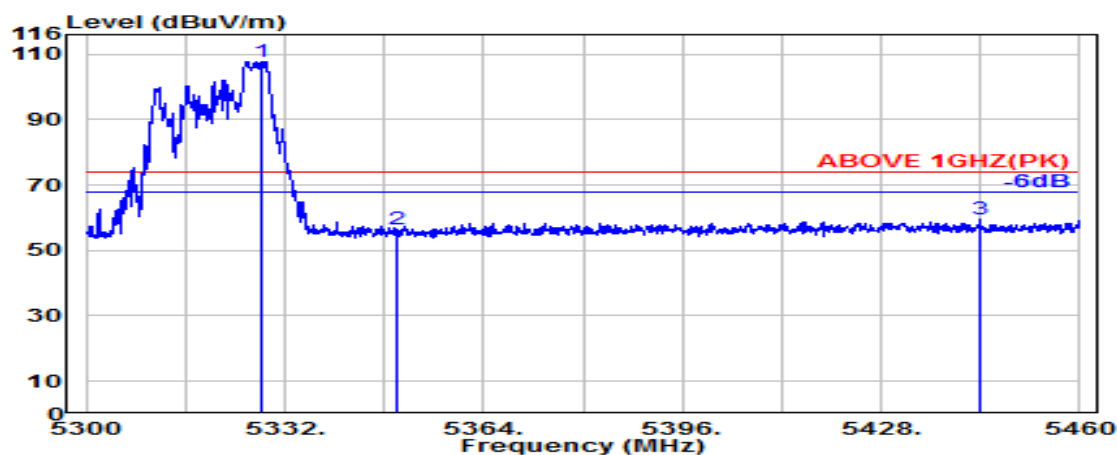

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.94	8.65	39.26	104.49	107.83	---	---	Peak
5350.000	33.90	8.67	39.26	53.00	56.31	74.00	17.69	Peak
5443.900	33.99	8.72	39.25	55.89	59.34	74.00	14.66	Peak

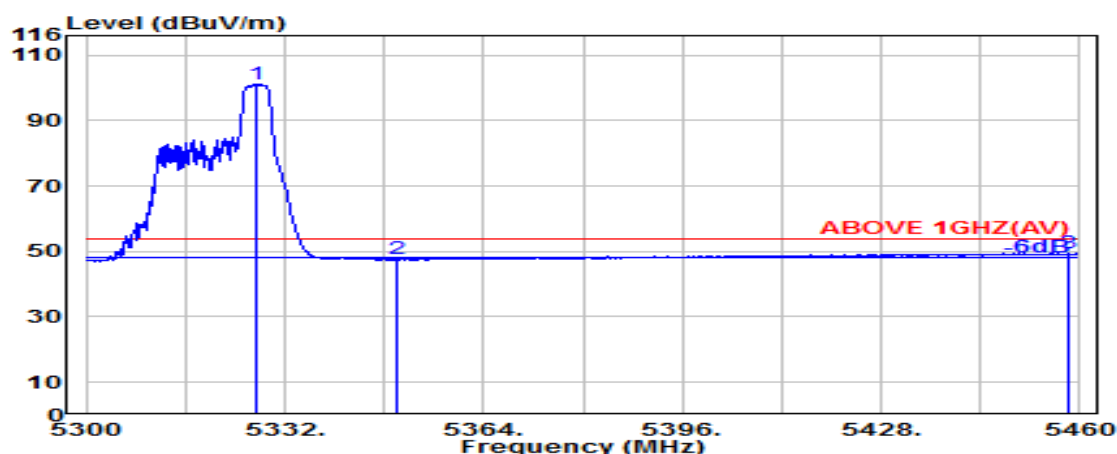

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.94	8.65	39.26	97.77	101.11	---	---	Average
5350.000	33.90	8.67	39.26	44.21	47.52	54.00	6.48	Average
5458.100	34.02	8.73	39.25	45.84	49.33	54.00	4.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

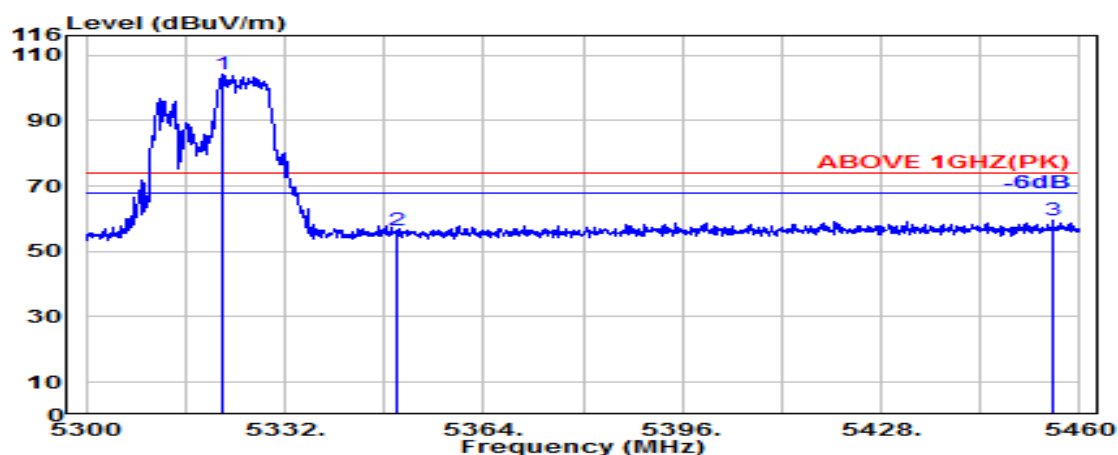

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	33.96	8.65	39.26	100.93	104.27	---	---	Peak
5350.000	33.90	8.67	39.26	53.01	56.32	74.00	17.68	Peak
5455.700	34.01	8.73	39.25	55.94	59.43	74.00	14.57	Peak

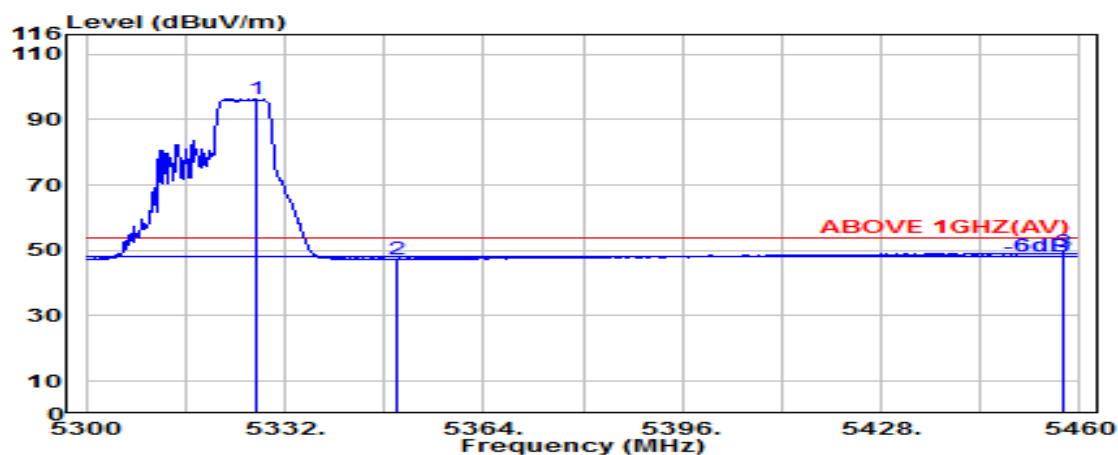

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.94	8.65	39.26	93.07	96.41	---	---	Average
5350.000	33.90	8.67	39.26	44.07	47.37	54.00	6.63	Average
5457.300	34.01	8.73	39.25	45.82	49.31	54.00	4.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

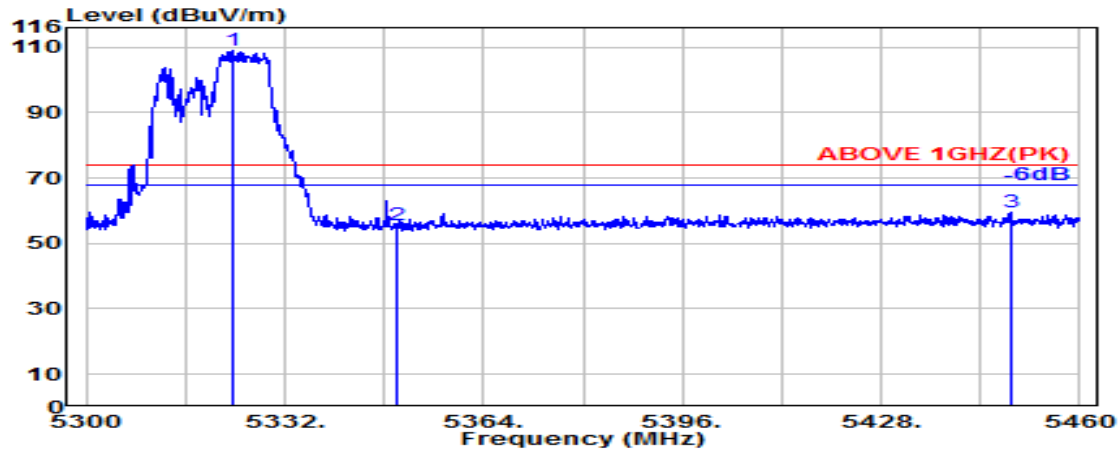

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	33.95	8.65	39.26	105.62	108.97	---	---	Peak
5350.000	33.90	8.67	39.26	52.40	55.71	74.00	18.29	Peak
5448.900	34.00	8.72	39.25	56.04	59.50	74.00	14.50	Peak

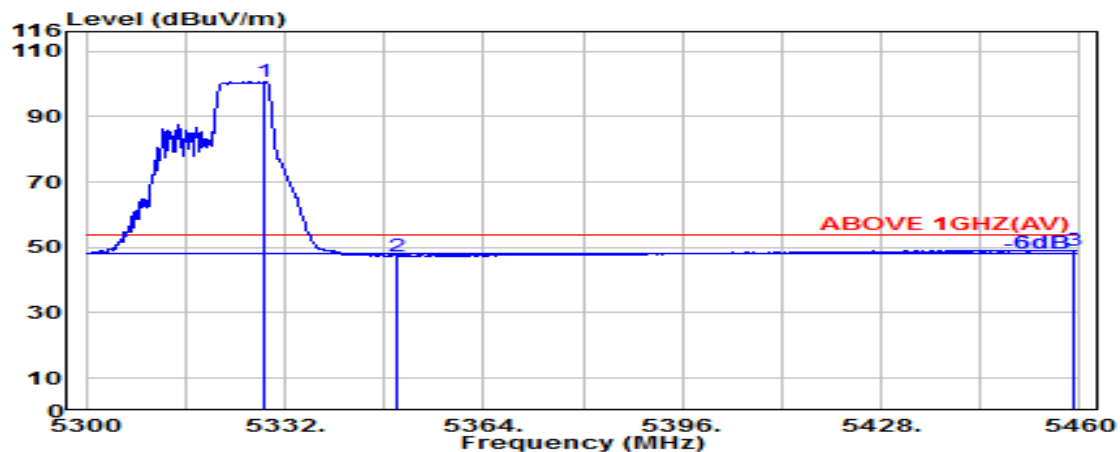

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.94	8.65	39.26	97.35	100.69	---	---	Average
5350.000	33.90	8.67	39.26	44.04	47.35	54.00	6.65	Average
5459.000	34.02	8.73	39.25	45.71	49.21	54.00	4.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

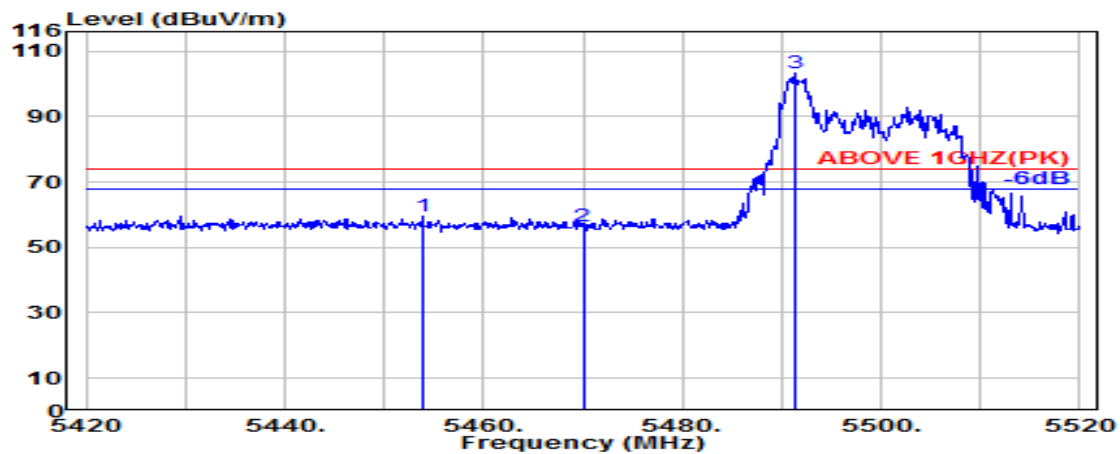

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.900	34.01	8.73	39.25	56.02	59.50	74.00	14.50	Peak
5470.000	34.04	8.74	39.25	52.79	56.32	74.00	17.68	Peak
@ 5491.300	34.08	8.75	39.25	99.58	103.16	---	---	Peak

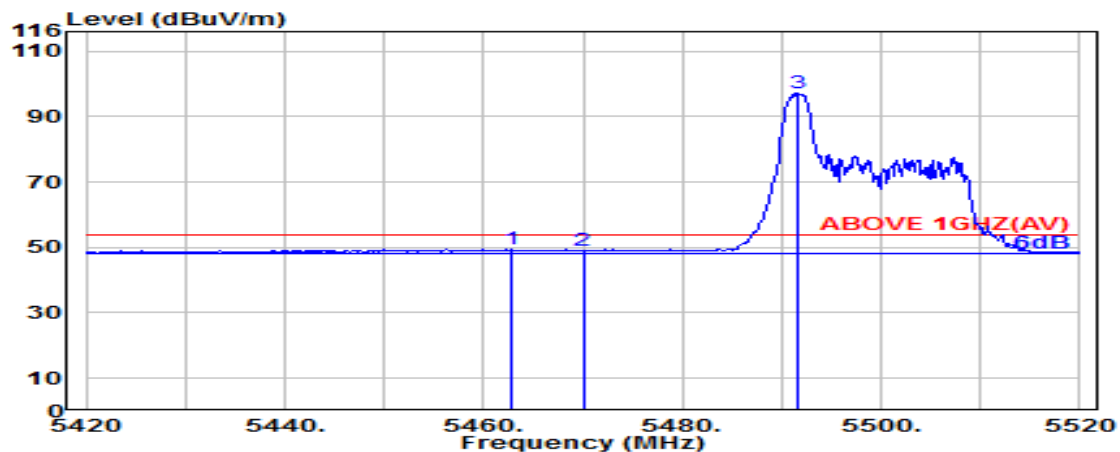

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.03	8.73	39.25	45.87	49.38	54.00	4.62	Average
5470.000	34.04	8.74	39.25	45.52	49.04	54.00	4.96	Average
@ 5491.500	34.08	8.75	39.25	93.71	97.30	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

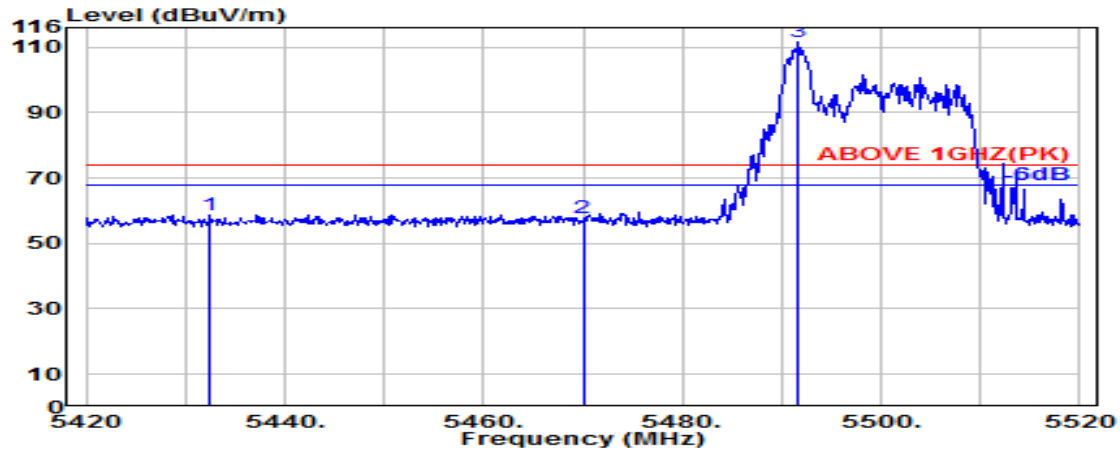

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.500	33.97	8.71	39.25	55.35	58.77	74.00	15.23	Peak
5470.000	34.04	8.74	39.25	54.27	57.79	74.00	16.21	Peak
@ 5491.700	34.08	8.75	39.25	108.23	111.81	---	---	Peak

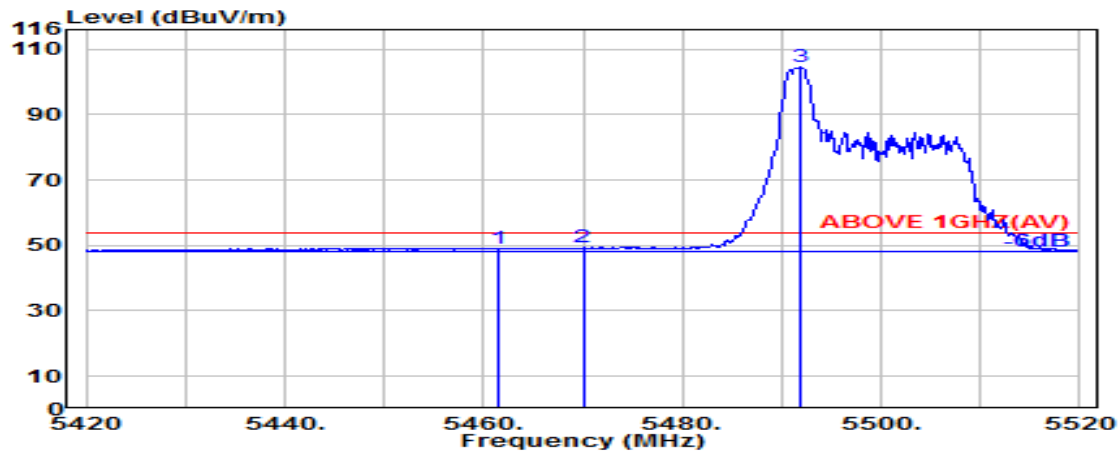

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.400	34.02	8.73	39.25	45.74	49.24	54.00	4.76	Average
5470.000	34.04	8.74	39.25	45.73	49.26	54.00	4.74	Average
@ 5491.900	34.08	8.75	39.25	100.96	104.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

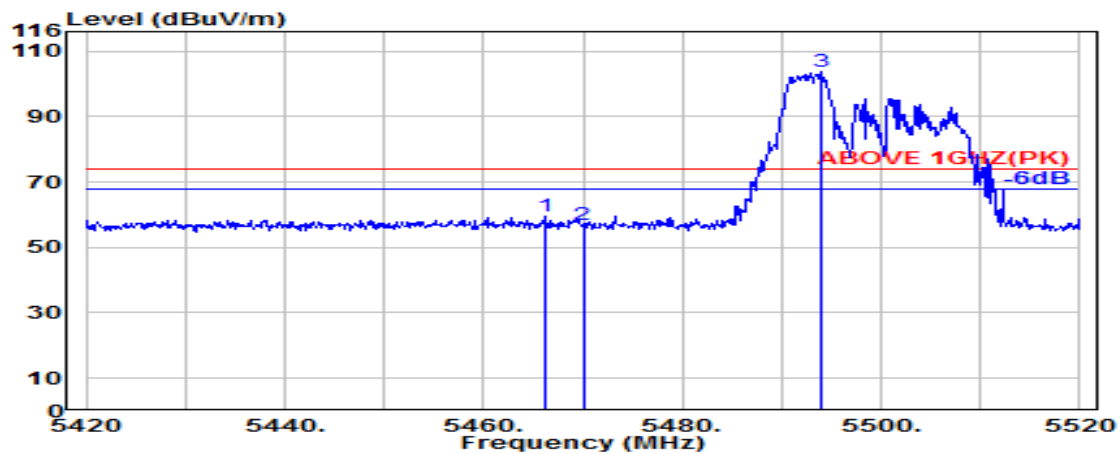

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.03	8.73	39.25	55.88	59.40	74.00	14.60	Peak
5470.000	34.04	8.74	39.25	53.51	57.03	74.00	16.97	Peak
@ 5494.000	34.09	8.75	39.25	100.02	103.61	---	---	Peak

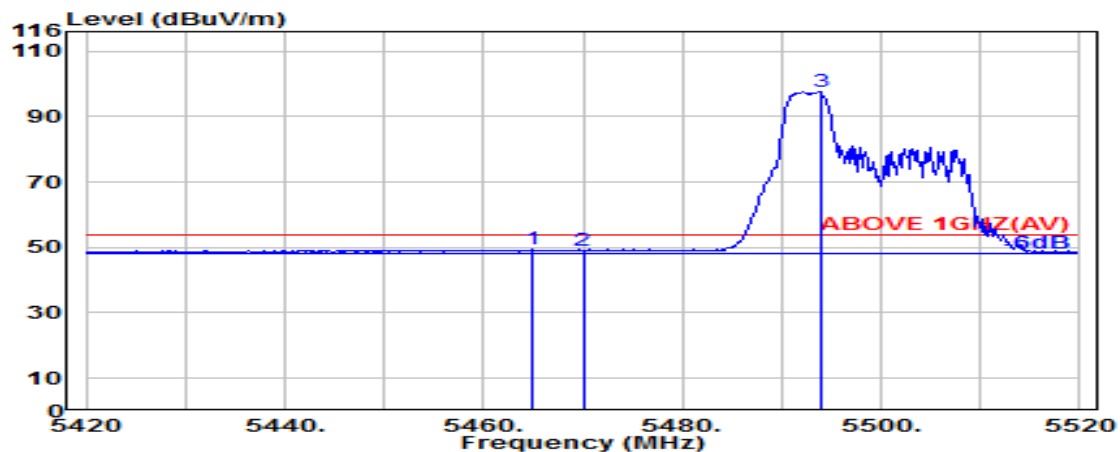

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.800	34.03	8.73	39.25	45.82	49.33	54.00	4.67	Average
5470.000	34.04	8.74	39.25	45.47	48.99	54.00	5.01	Average
@ 5493.900	34.09	8.75	39.25	94.04	97.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

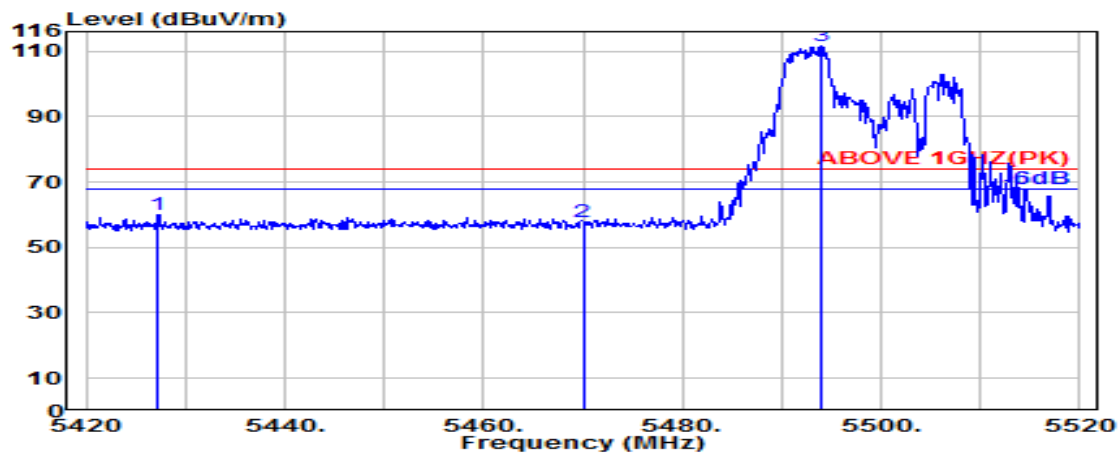

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.200	33.95	8.71	39.25	56.53	59.94	74.00	14.06	Peak
5470.000	34.04	8.74	39.25	54.11	57.64	74.00	16.36	Peak
@ 5493.900	34.09	8.75	39.25	107.97	111.56	---	---	Peak

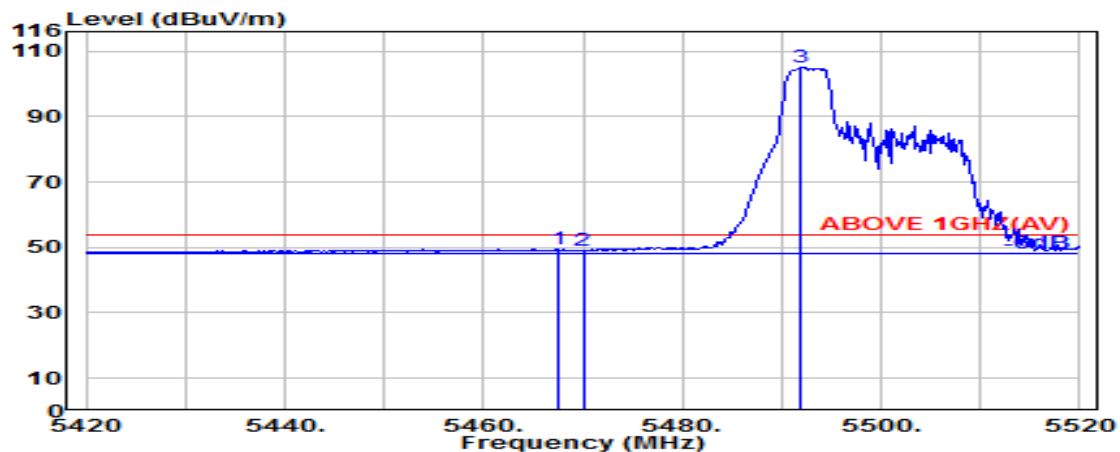

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.73	39.25	45.80	49.32	54.00	4.68	Average
5470.000	34.04	8.74	39.25	45.51	49.04	54.00	4.96	Average
@ 5491.800	34.08	8.75	39.25	101.46	105.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

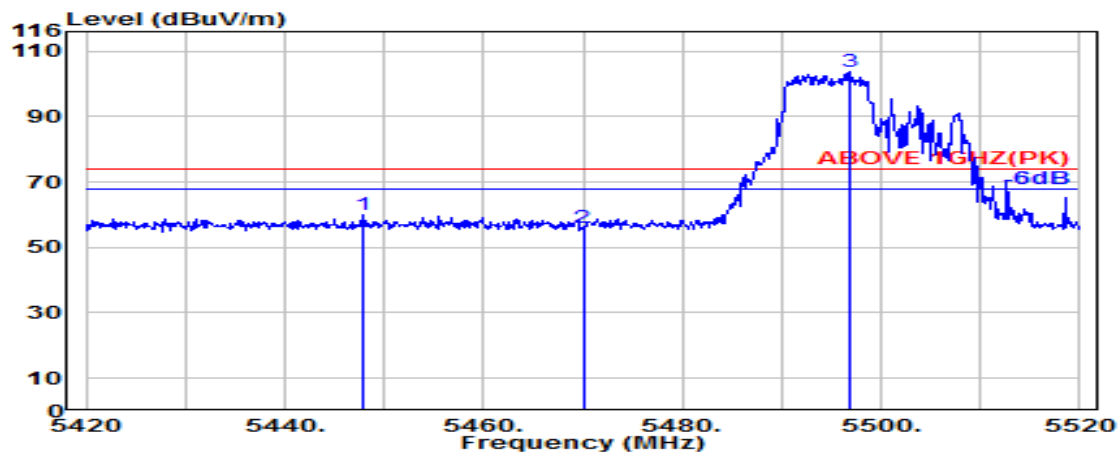

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.900	34.00	8.72	39.25	56.66	60.13	74.00	13.87	Peak
5470.000	34.04	8.74	39.25	52.71	56.23	74.00	17.77	Peak
@ 5496.900	34.09	8.75	39.25	100.36	103.96	---	---	Peak

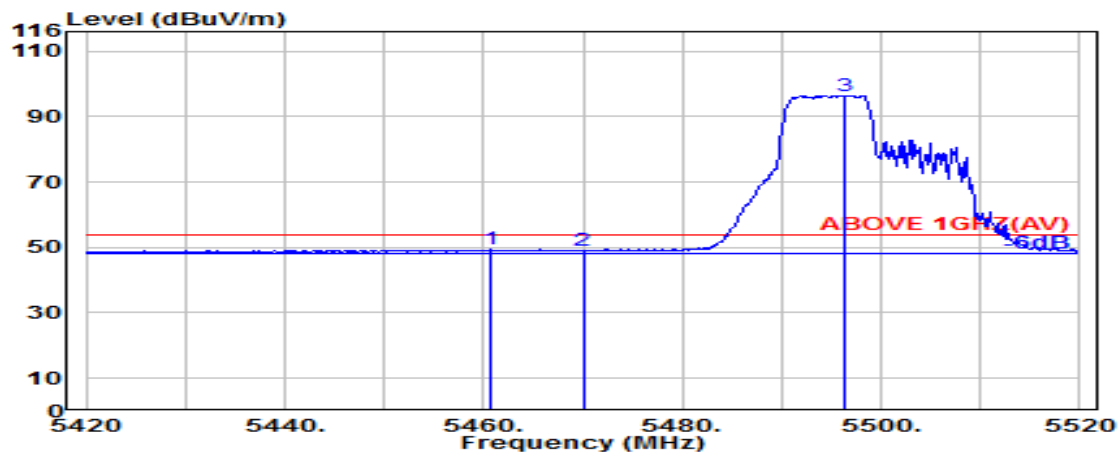

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.700	34.02	8.73	39.25	45.84	49.34	54.00	4.66	Average
5470.000	34.04	8.74	39.25	45.50	49.03	54.00	4.97	Average
@ 5496.300	34.09	8.75	39.25	92.89	96.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

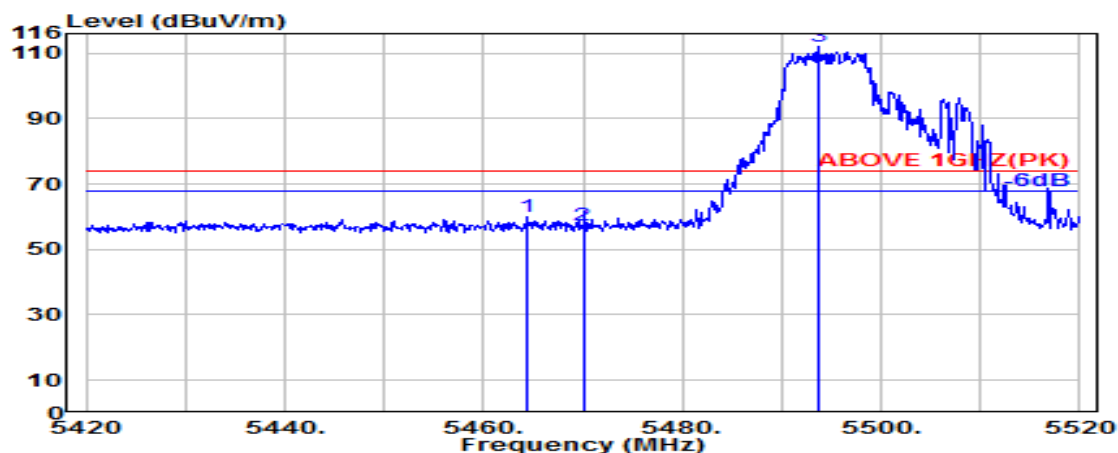

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.03	8.73	39.25	56.44	59.95	74.00	14.05	Peak
5470.000	34.04	8.74	39.25	53.61	57.13	74.00	16.87	Peak
@ 5493.800	34.09	8.75	39.25	108.55	112.14	---	---	Peak

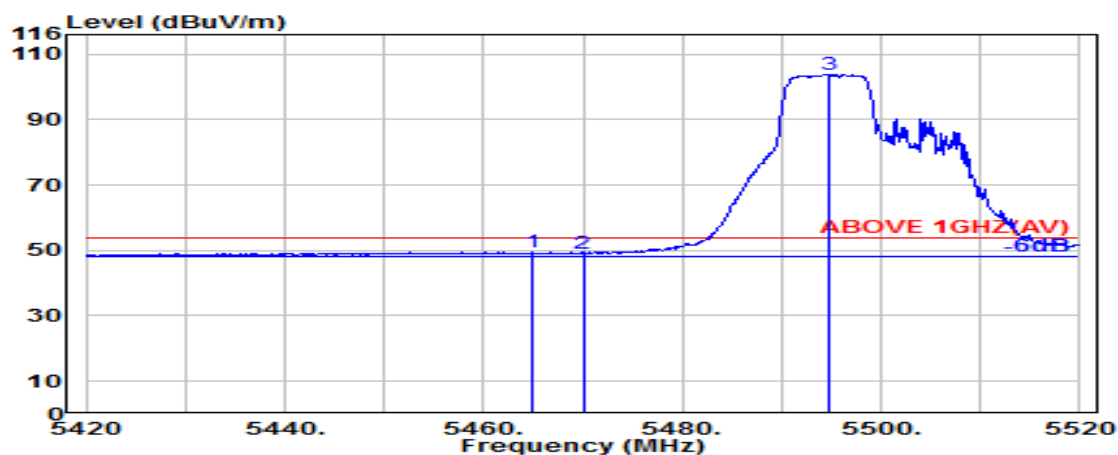


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.03	8.73	39.25	45.81	49.32	54.00	4.68	Average
5470.000	34.04	8.74	39.25	45.67	49.19	54.00	4.81	Average
@ 5494.800	34.09	8.75	39.25	100.36	103.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

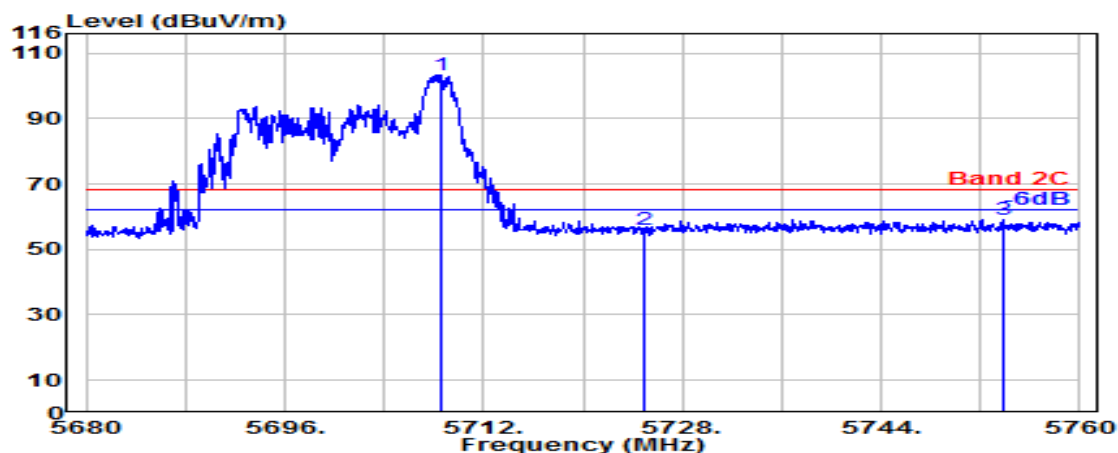

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.550	33.70	8.87	39.29	100.19	103.47	---	---	Peak
5725.000	33.70	8.88	39.29	52.85	56.14	68.20	12.06	Peak
5753.850	33.72	8.90	39.30	55.66	58.98	68.20	9.22	Peak

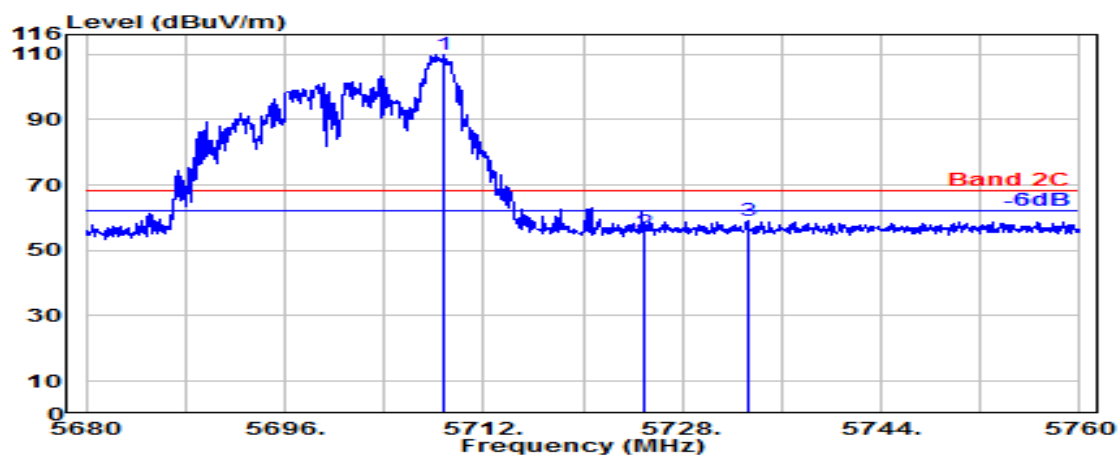

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.700	33.70	8.87	39.29	106.64	109.92	---	---	Peak
5725.000	33.70	8.88	39.29	52.31	55.60	68.20	12.60	Peak
5733.250	33.70	8.89	39.29	55.65	58.95	68.20	9.25	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

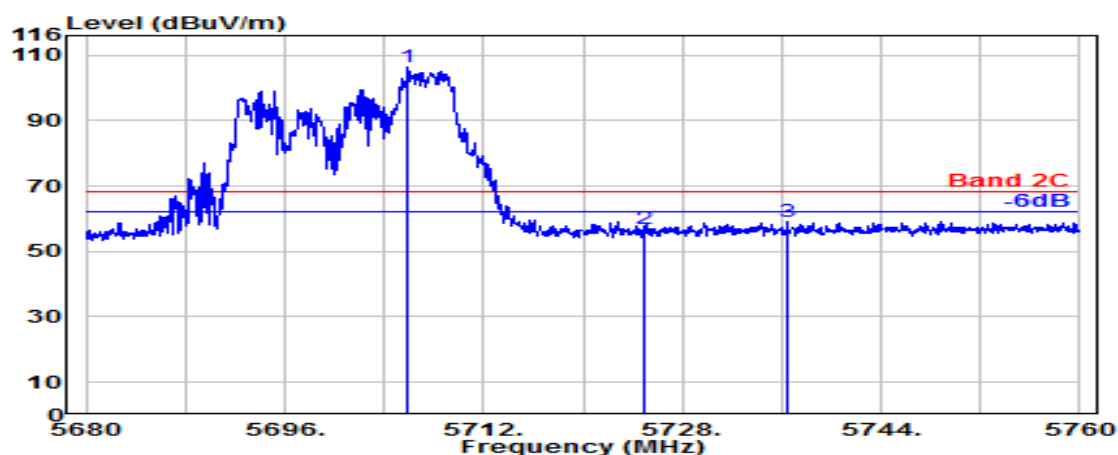

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5705.900	33.70	8.87	39.29	103.04	106.33	---	---	Peak
5725.000	33.70	8.88	39.29	53.71	57.00	68.20	11.20	Peak
5736.450	33.70	8.89	39.29	55.73	59.02	68.20	9.18	Peak

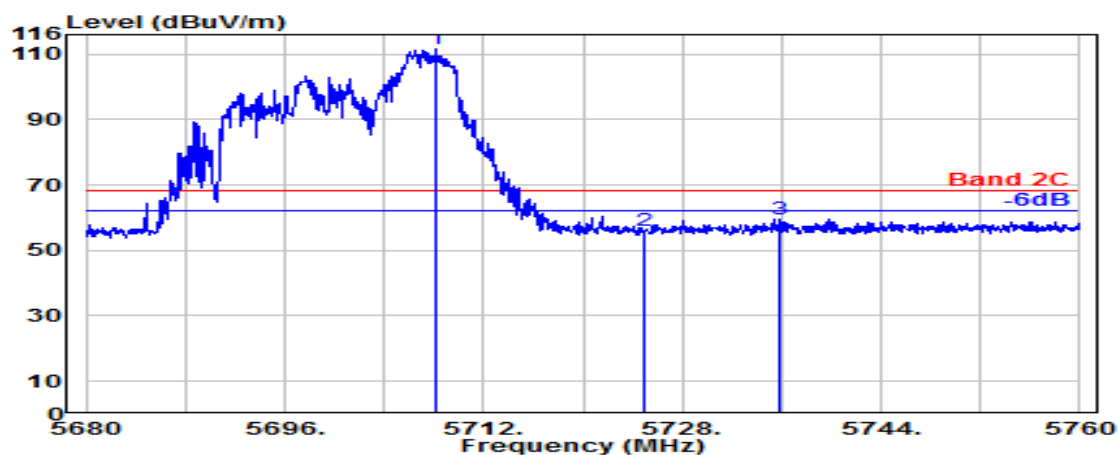

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5708.150	33.70	8.87	39.29	108.34	111.62	---	---	Peak
5725.000	33.70	8.88	39.29	52.95	56.24	68.20	11.96	Peak
5735.750	33.70	8.89	39.29	56.22	59.51	68.20	8.69	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

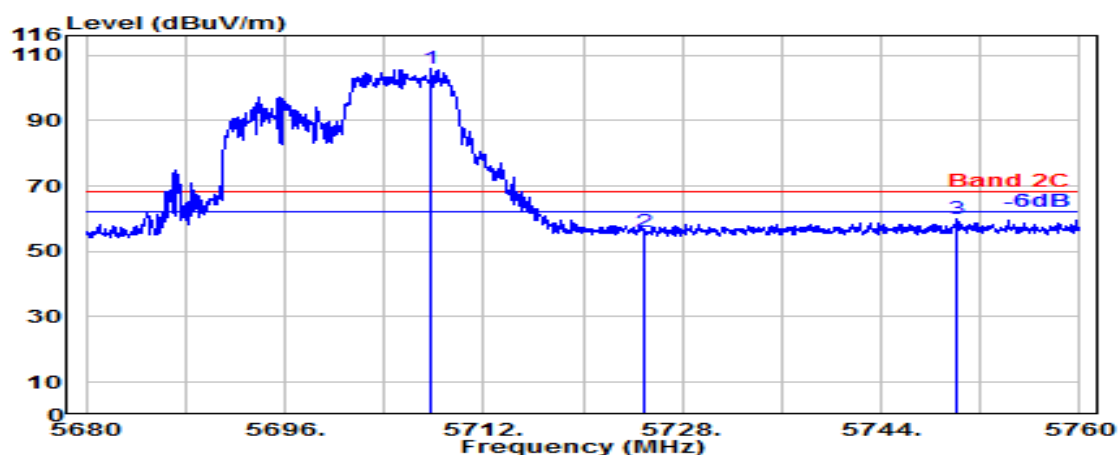

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.750	33.70	8.87	39.29	102.55	105.83	---	---	Peak
5725.000	33.70	8.88	39.29	52.57	55.86	68.20	12.34	Peak
5750.150	33.70	8.89	39.30	56.75	60.05	68.20	8.15	Peak

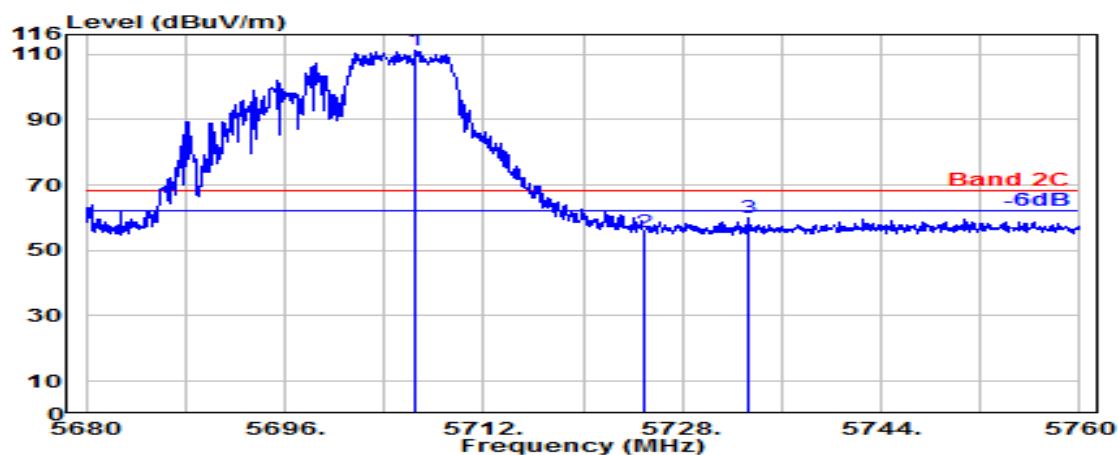

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.550	33.70	8.87	39.29	108.02	111.30	---	---	Peak
5725.000	33.70	8.88	39.29	52.44	55.73	68.20	12.47	Peak
5733.400	33.70	8.89	39.29	56.83	60.13	68.20	8.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

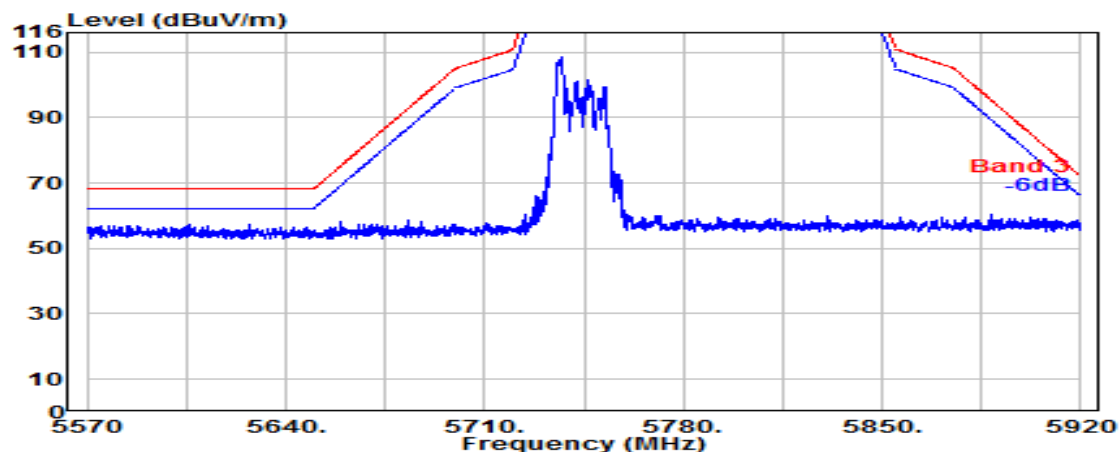

Antenna at Vertical Polarization

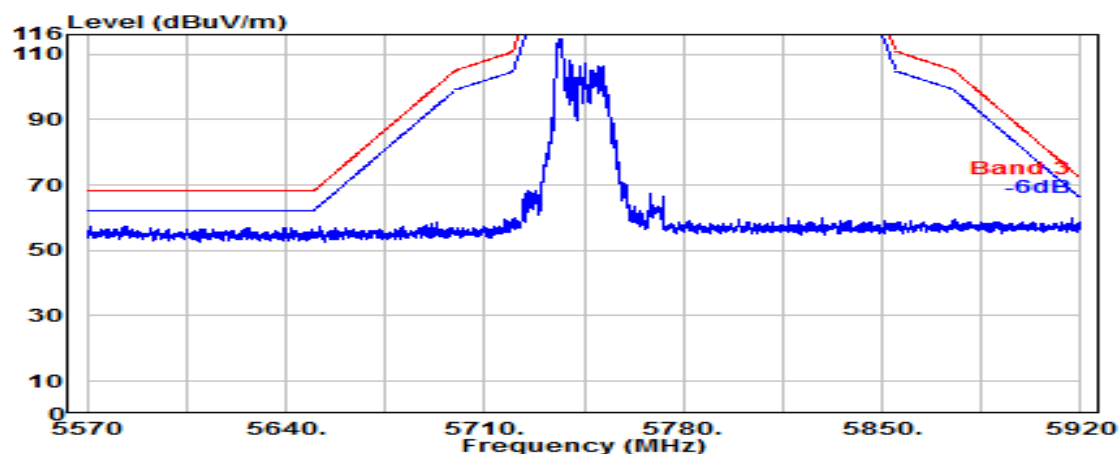


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

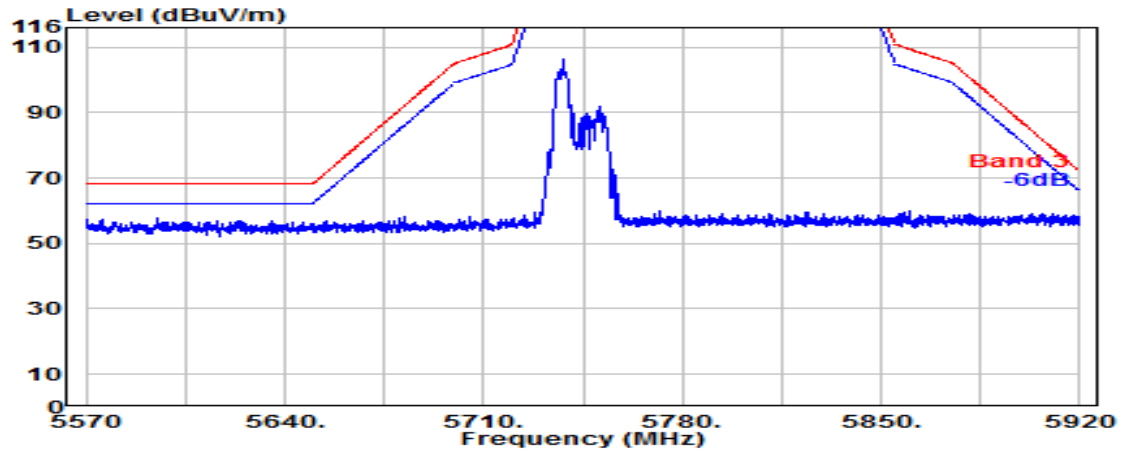

Antenna at Vertical Polarization

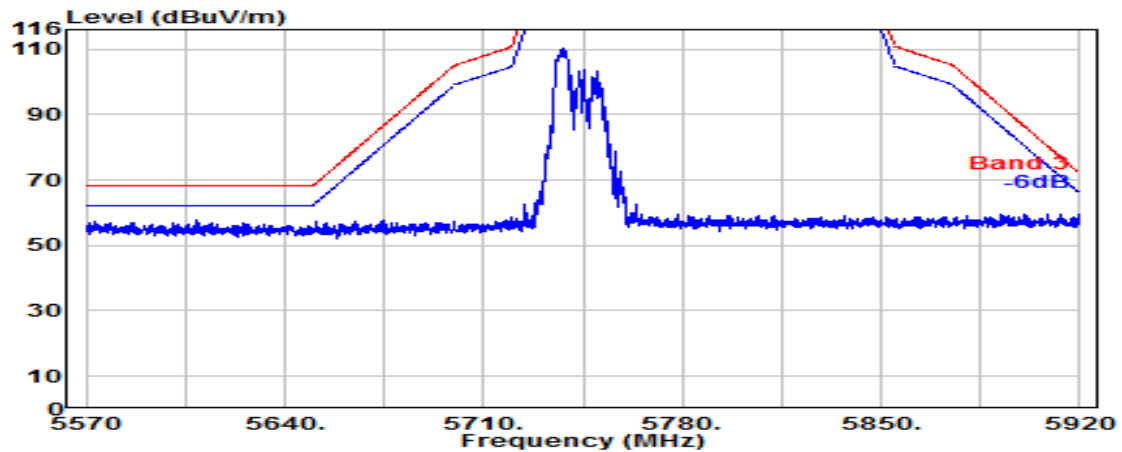


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

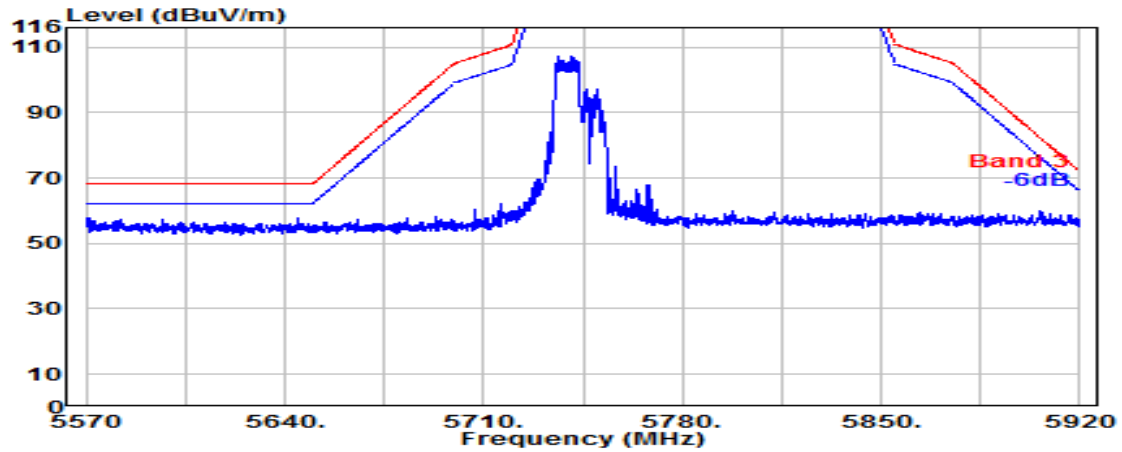


Antenna at Vertical Polarization

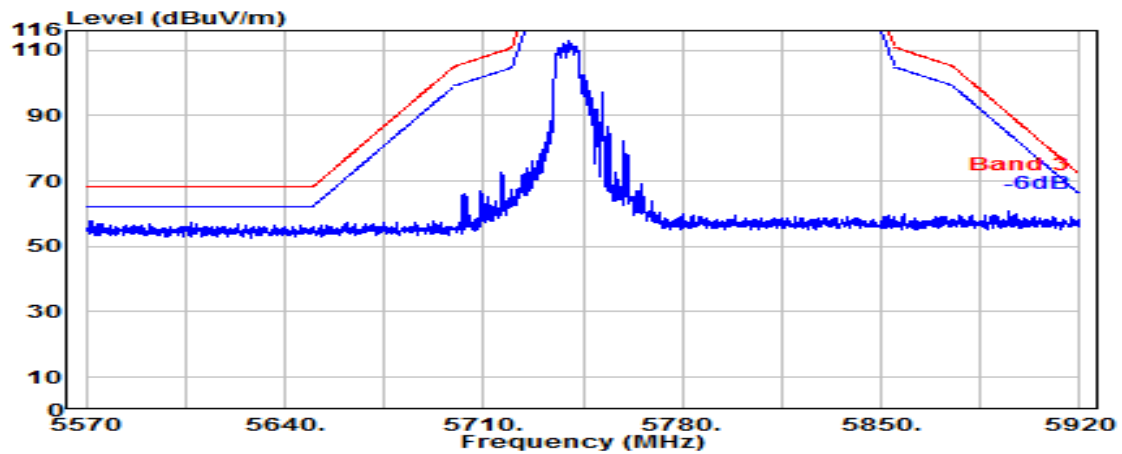


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

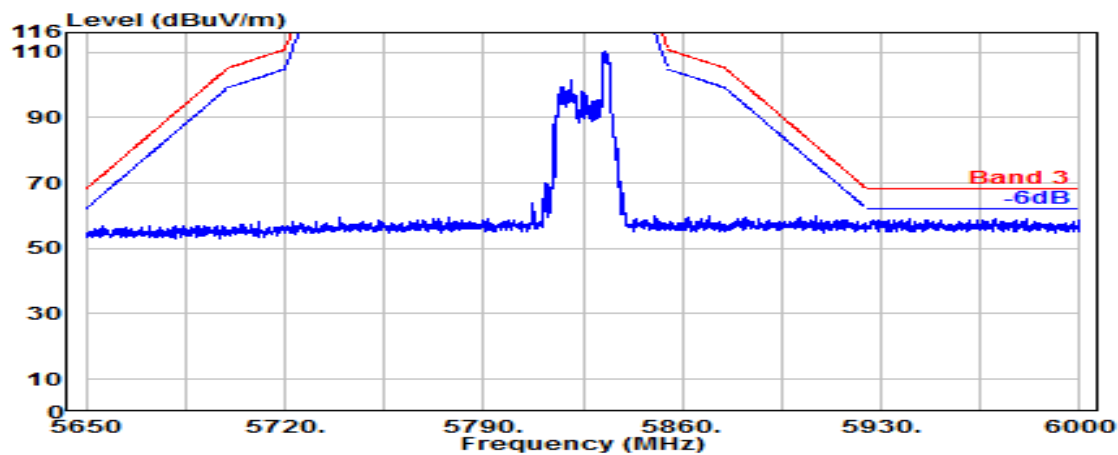

Antenna at Vertical Polarization

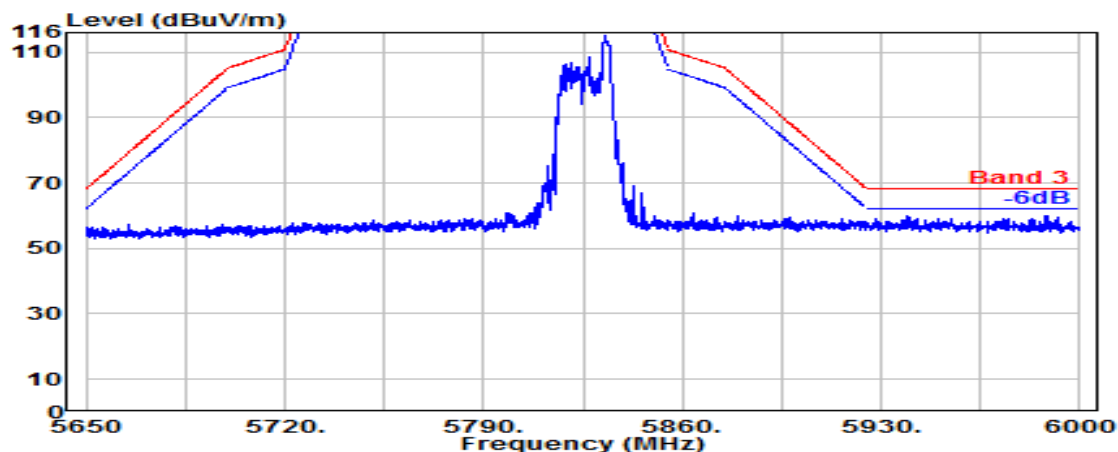


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

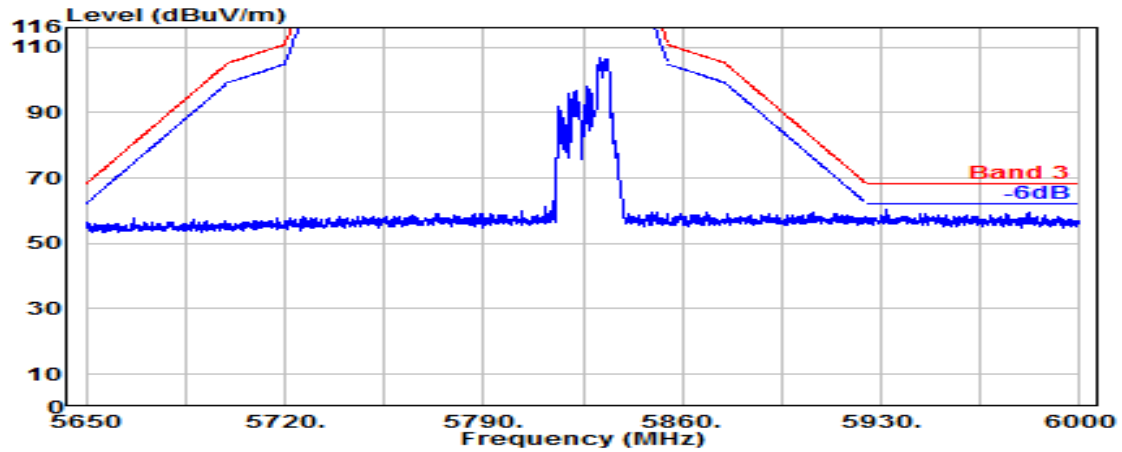

Antenna at Vertical Polarization

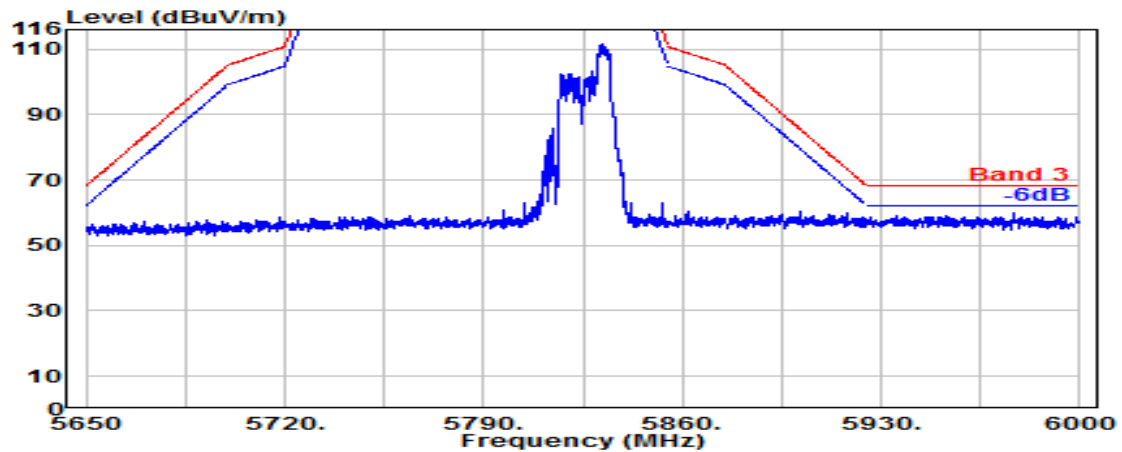


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

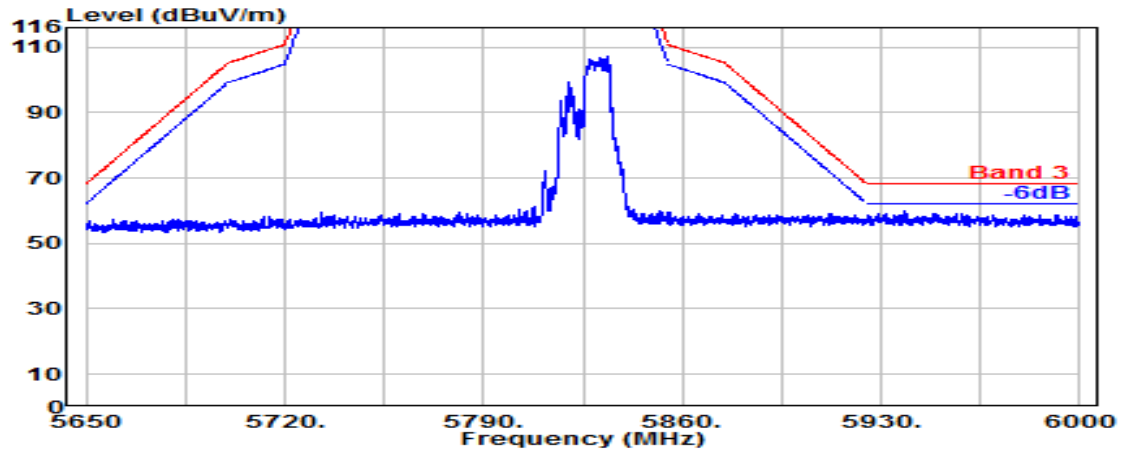

Antenna at Vertical Polarization

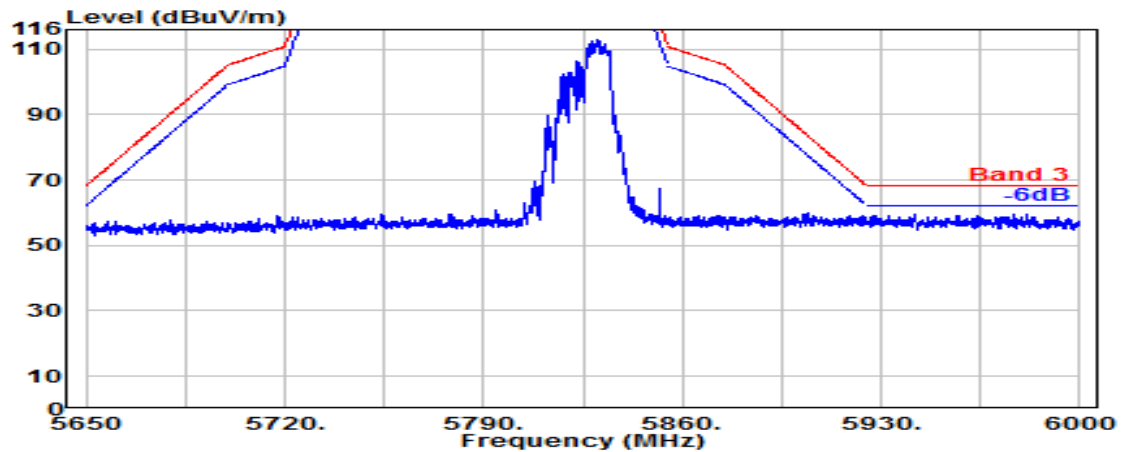

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

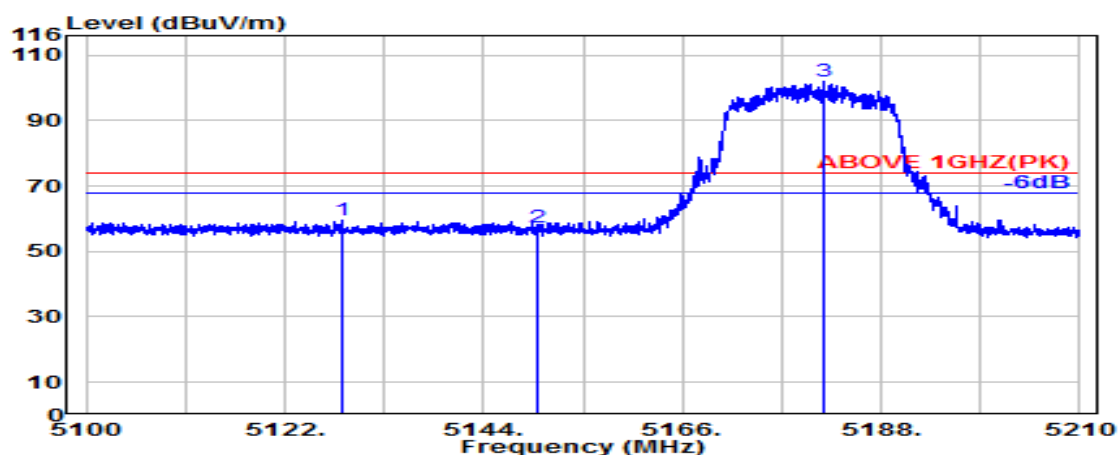

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.380	33.60	8.53	39.27	56.51	59.37	74.00	14.63	Peak
5150.000	33.60	8.54	39.27	54.49	57.36	74.00	16.64	Peak
@ 5181.746	33.66	8.56	39.27	99.16	102.12	---	---	Peak

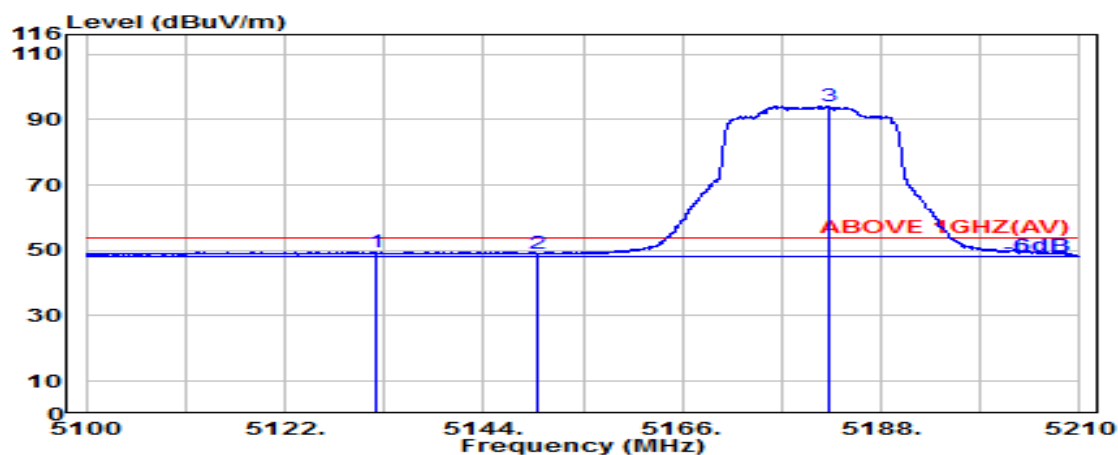

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.088	33.60	8.53	39.27	46.65	49.51	54.00	4.49	Average
5150.000	33.60	8.54	39.27	46.18	49.05	54.00	4.95	Average
@ 5182.312	33.66	8.56	39.27	91.08	94.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

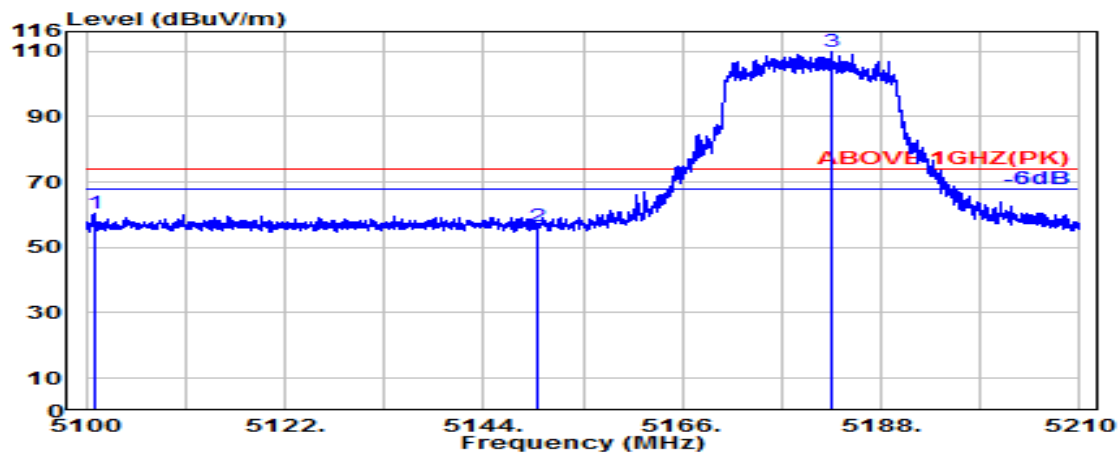

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5100.849	33.60	8.51	39.27	57.54	60.38	74.00	13.62	Peak
5150.000	33.60	8.54	39.27	53.71	56.58	74.00	17.42	Peak
@ 5182.437	33.66	8.56	39.27	106.72	109.68	---	---	Peak

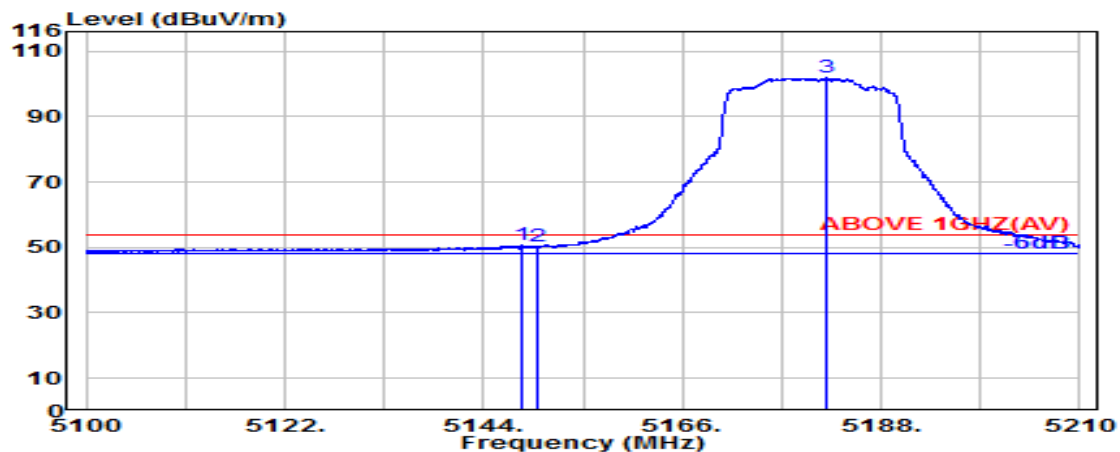

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.211	33.60	8.54	39.27	47.76	50.63	54.00	3.37	Average
5150.000	33.60	8.54	39.27	47.26	50.14	54.00	3.86	Average
@ 5181.997	33.66	8.56	39.27	98.85	101.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

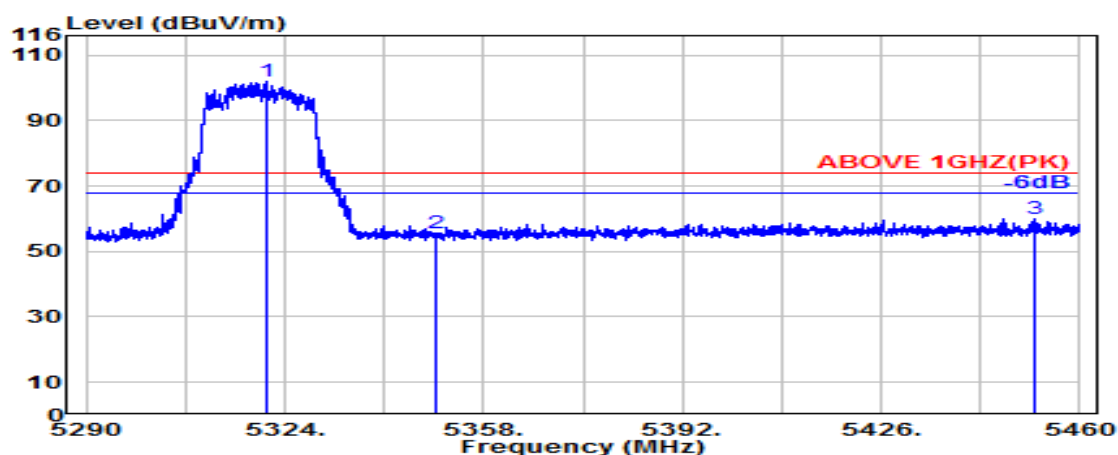

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.746	33.96	8.65	39.26	98.84	102.18	---	---	Peak
5350.000	33.90	8.67	39.26	52.30	55.60	74.00	18.40	Peak
5452.131	34.00	8.73	39.25	56.69	60.17	74.00	13.83	Peak

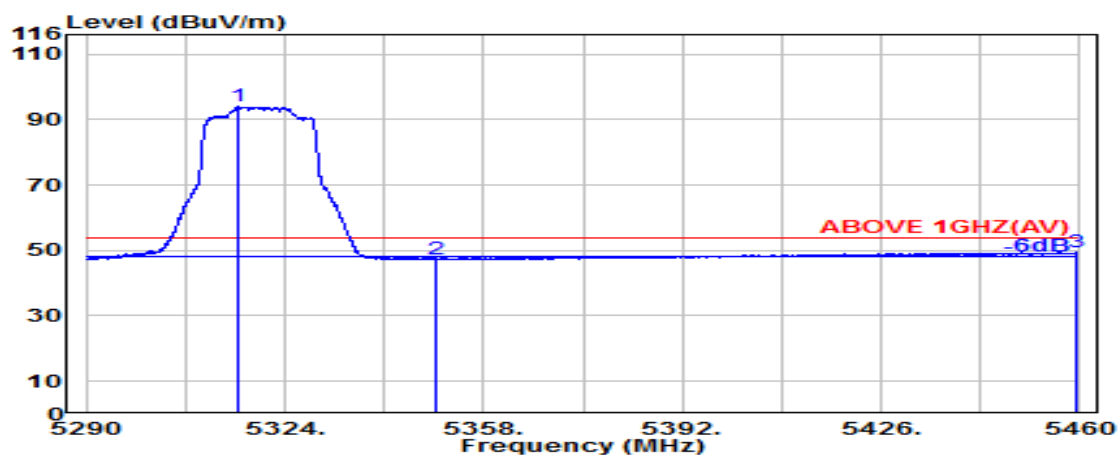

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.034	33.97	8.64	39.26	90.96	94.31	---	---	Average
5350.000	33.90	8.67	39.26	44.14	47.44	54.00	6.56	Average
5459.417	34.02	8.73	39.25	45.78	49.27	54.00	4.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

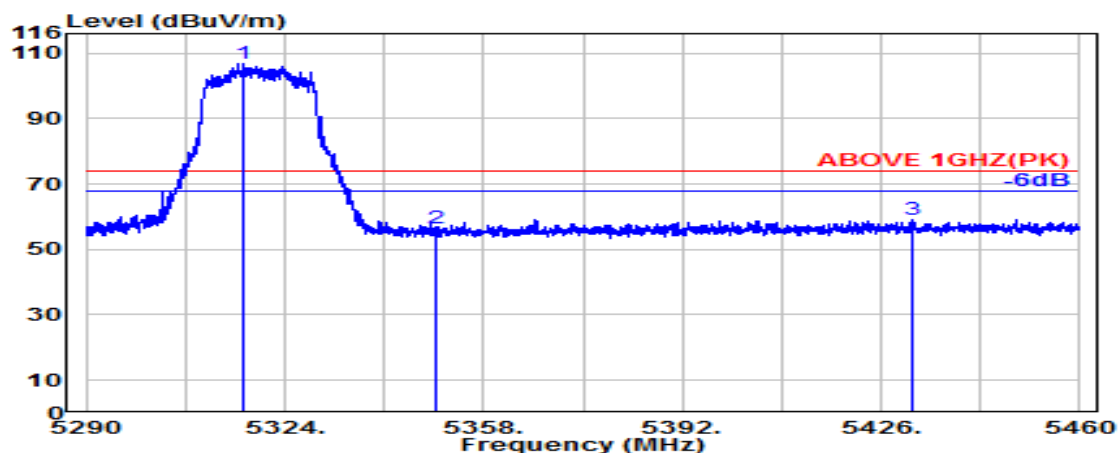

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.860	33.97	8.65	39.26	103.59	106.94	---	---	Peak
5350.000	33.90	8.67	39.26	53.30	56.60	74.00	17.40	Peak
5431.148	33.96	8.71	39.25	55.68	59.10	74.00	14.90	Peak

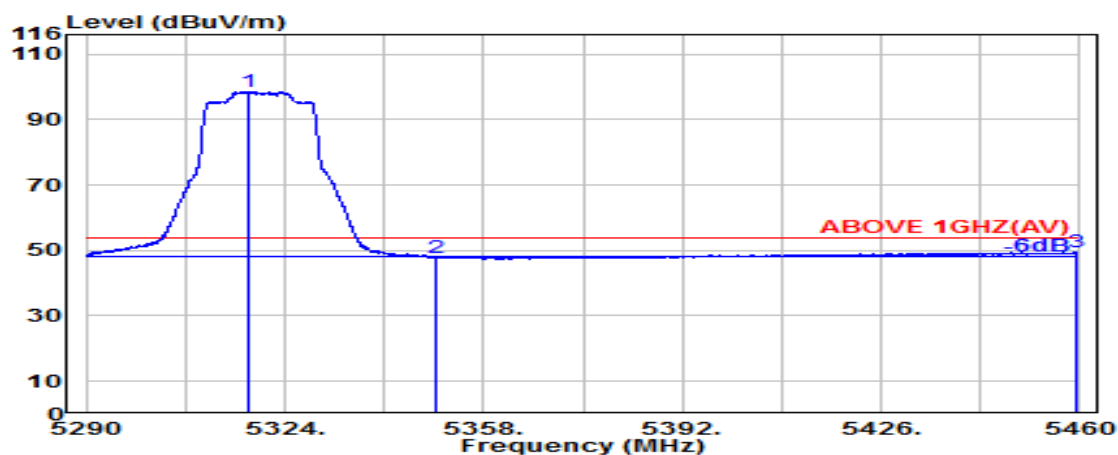

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.977	33.96	8.65	39.26	95.24	98.59	---	---	Average
5350.000	33.90	8.67	39.26	44.57	47.88	54.00	6.12	Average
5459.466	34.02	8.73	39.25	45.87	49.37	54.00	4.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

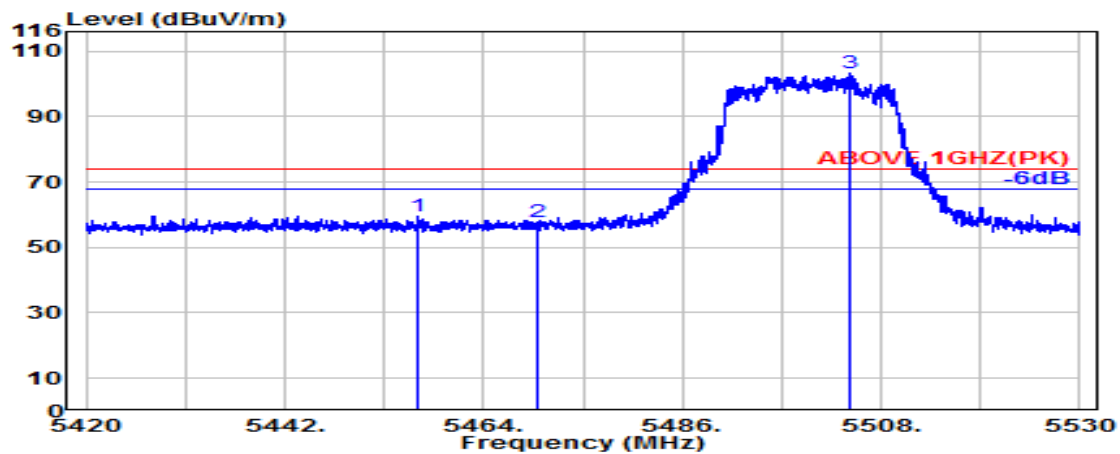

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.646	34.01	8.73	39.25	56.11	59.60	74.00	14.40	Peak
5470.000	34.04	8.74	39.25	54.04	57.57	74.00	16.43	Peak
@ 5504.637	34.09	8.76	39.25	99.71	103.31	---	---	Peak

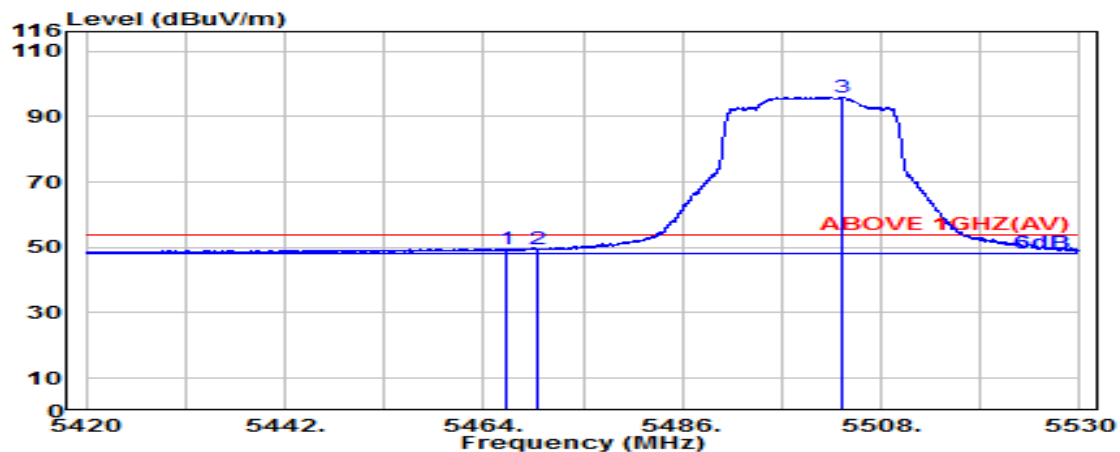


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.389	34.03	8.73	39.25	46.09	49.60	54.00	4.40	Average
5470.000	34.04	8.74	39.25	45.87	49.39	54.00	4.61	Average
@ 5503.789	34.09	8.76	39.25	92.47	96.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

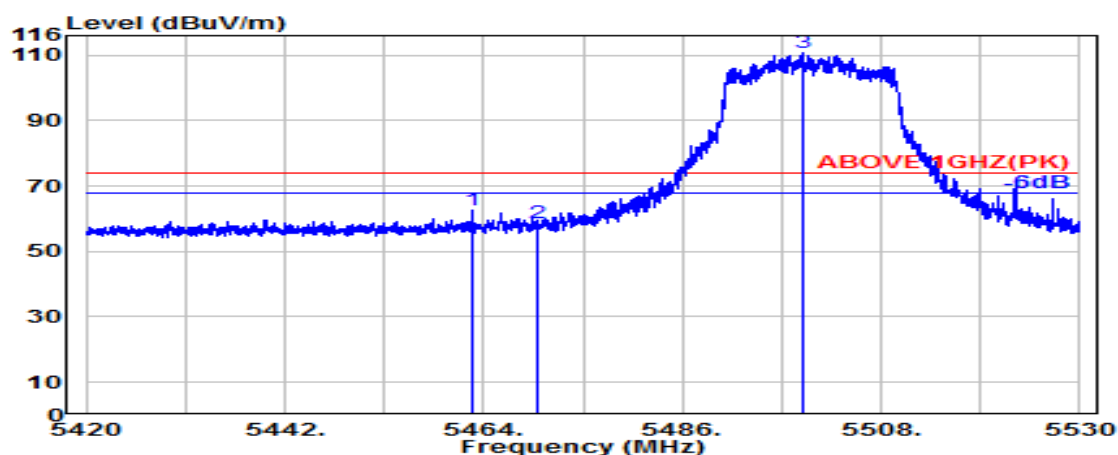

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.837	34.03	8.73	39.25	58.93	62.44	74.00	11.56	Peak
5470.000	34.04	8.74	39.25	55.35	58.88	74.00	15.12	Peak
@ 5499.263	34.10	8.75	39.25	107.34	110.94	---	---	Peak

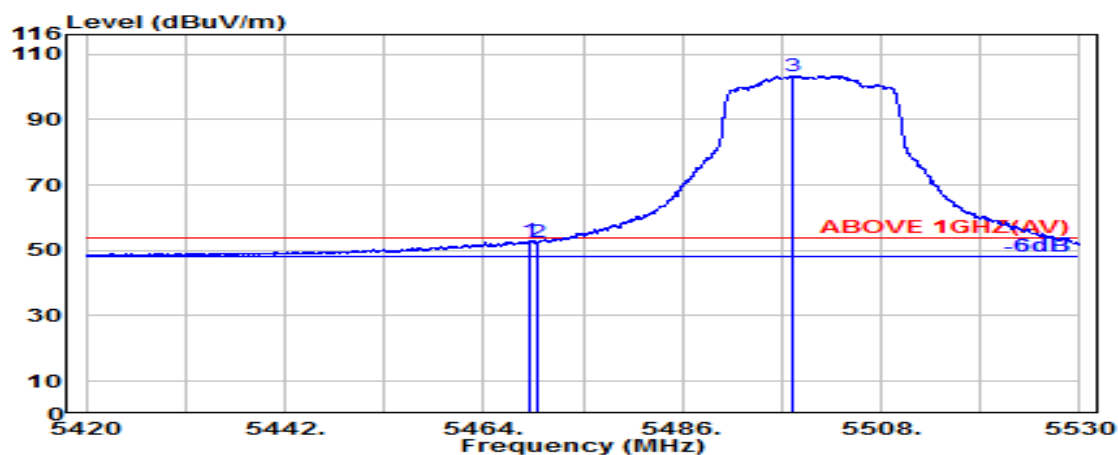

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.997	34.04	8.74	39.25	49.26	52.78	54.00	1.22	Average
5470.000	34.04	8.74	39.25	49.07	52.59	54.00	1.41	Average
@ 5498.131	34.10	8.75	39.25	99.81	103.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

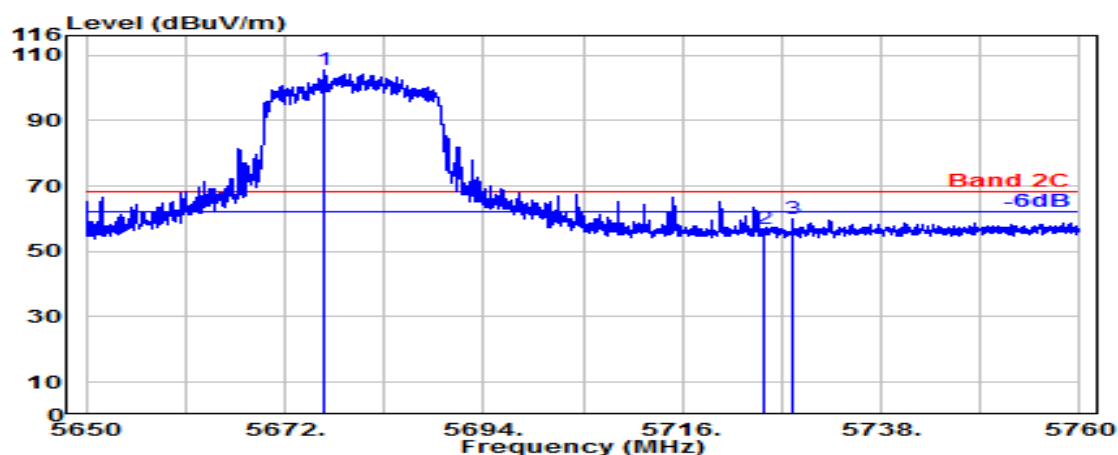

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.400	33.75	8.85	39.28	102.28	105.60	---	---	Peak
5725.000	33.70	8.88	39.29	53.52	56.81	68.20	11.39	Peak
5728.131	33.70	8.88	39.29	56.48	59.77	68.20	8.43	Peak

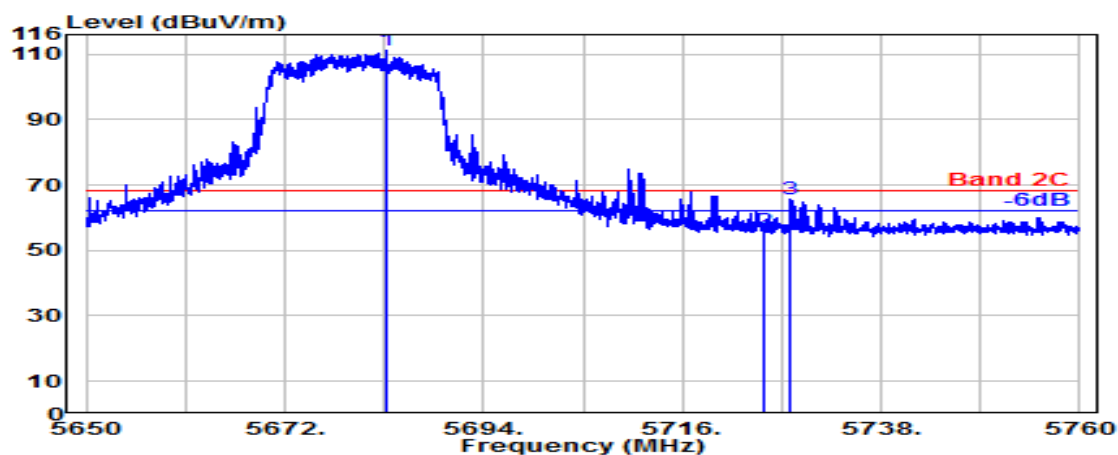

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.251	33.73	8.86	39.28	107.91	111.22	---	---	Peak
5725.000	33.70	8.88	39.29	52.58	55.87	68.20	12.33	Peak
5728.006	33.70	8.88	39.29	62.27	65.56	68.20	2.64	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

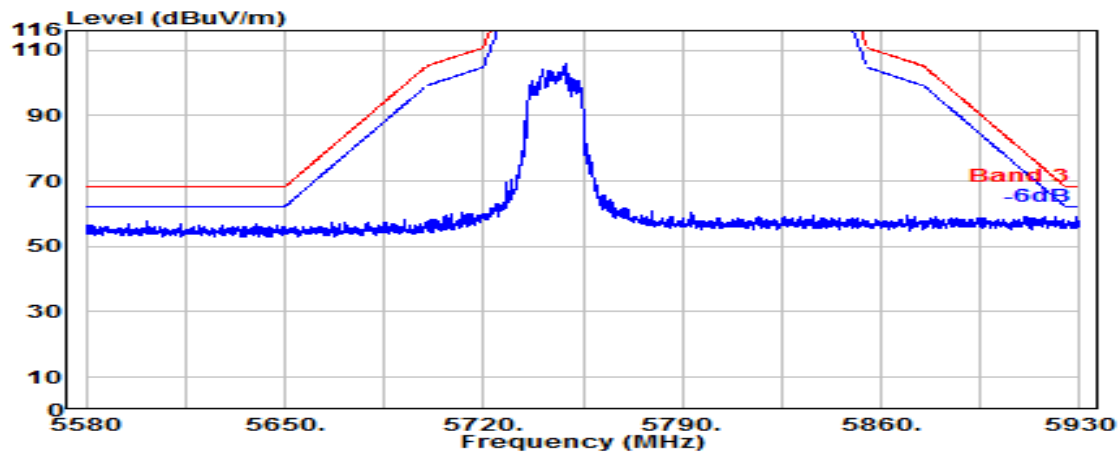

Antenna at Vertical Polarization

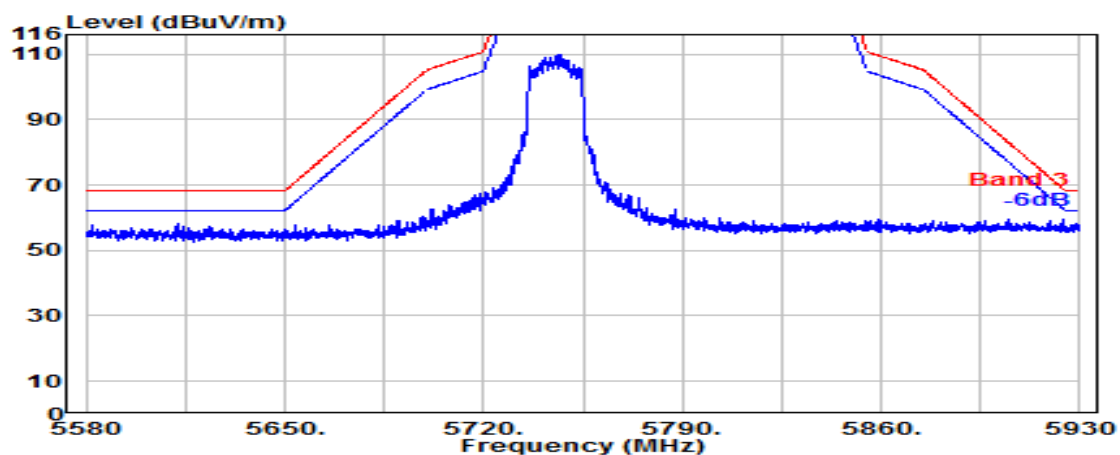


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

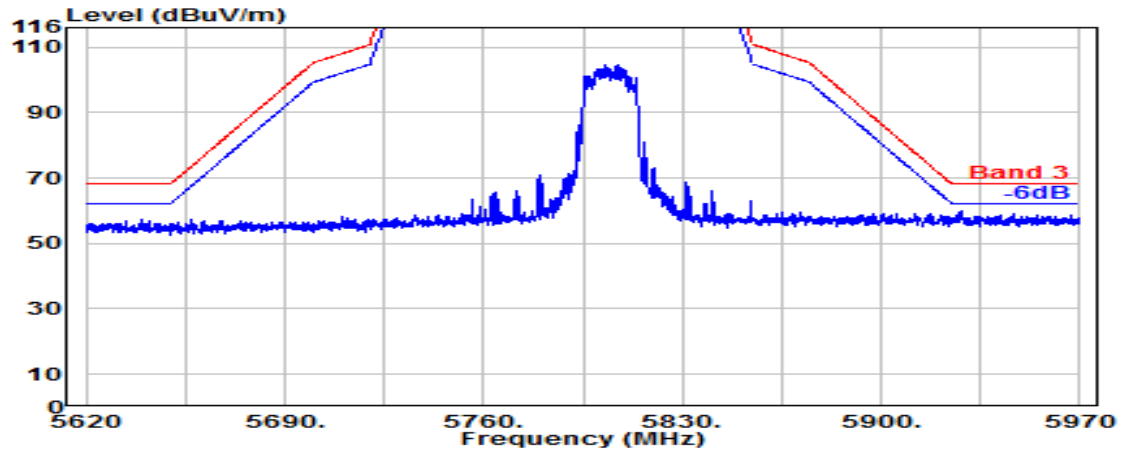

Antenna at Vertical Polarization

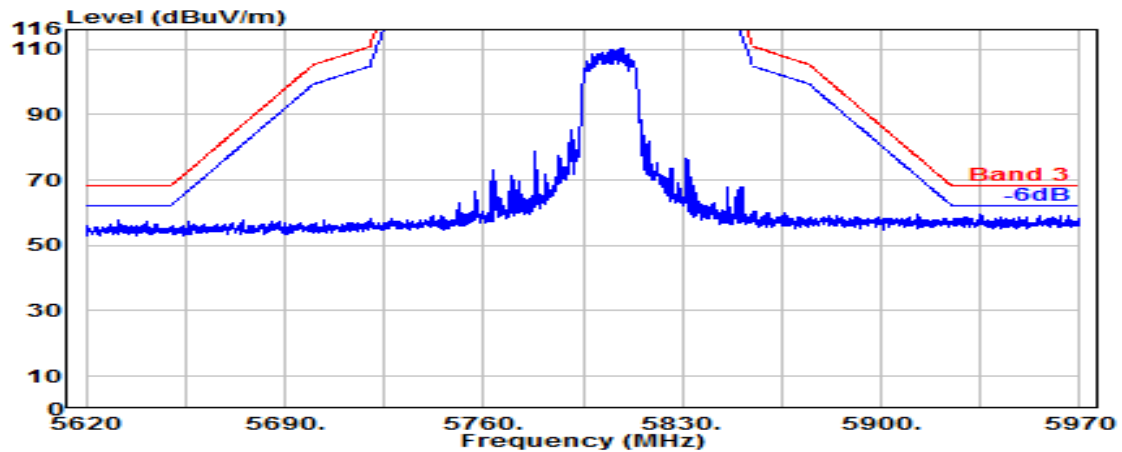


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

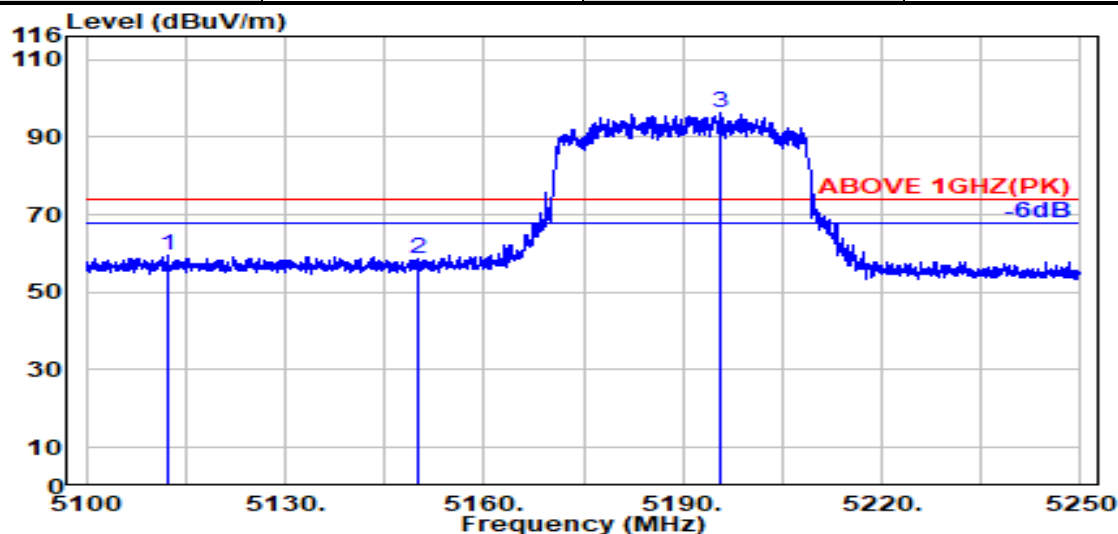

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.386	33.70	8.86	39.29	56.48	59.75	74.00	14.25	Peak
5150.014	33.70	8.89	39.29	55.30	58.60	74.00	15.40	Peak
@ 5195.571	33.70	8.91	39.28	93.12	96.45	---	---	Peak

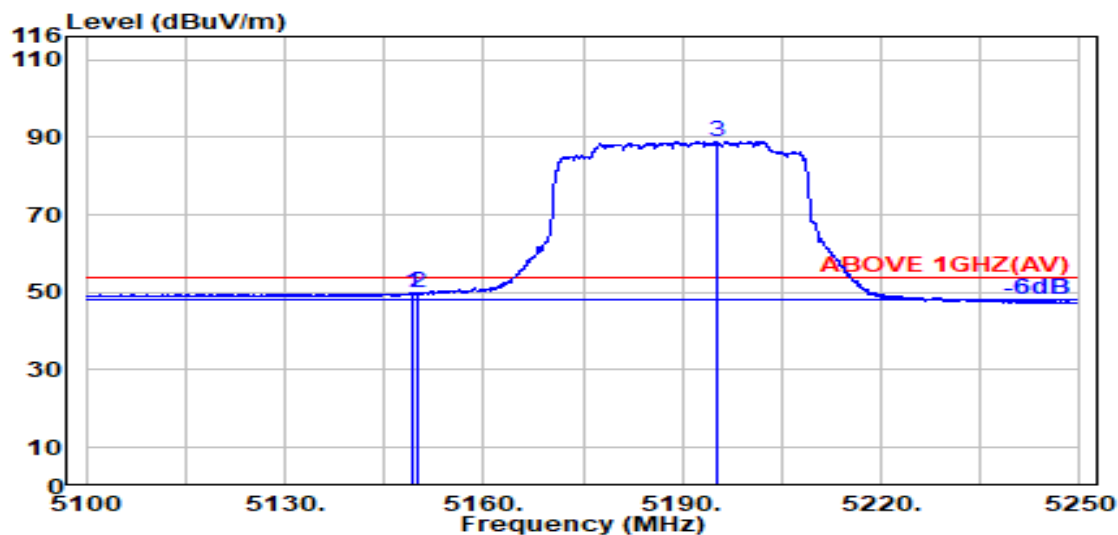

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.457	33.70	8.89	39.29	46.62	49.91	54.00	4.09	Average
5150.014	33.70	8.89	39.29	46.46	49.75	54.00	4.25	Average
@ 5195.229	33.70	8.91	39.28	85.55	88.88	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2306288

Report Number: EM-F230366


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

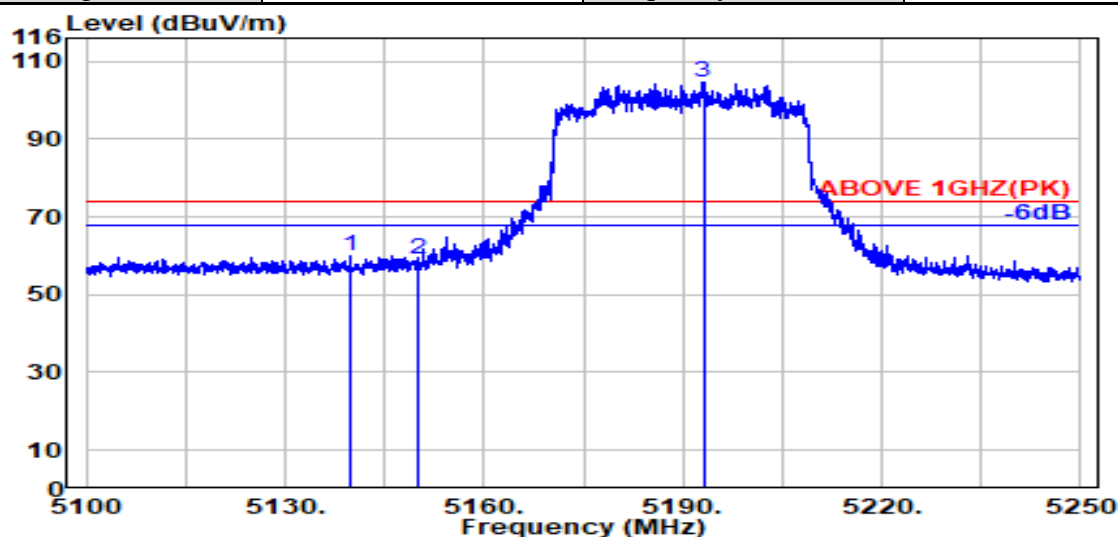

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5139.729	33.70	8.88	39.29	56.81	60.10	74.00	13.90	Peak
5150.014	33.70	8.89	39.29	55.58	58.88	74.00	15.12	Peak
@ 5193.086	33.70	8.91	39.28	101.18	104.50	---	---	Peak

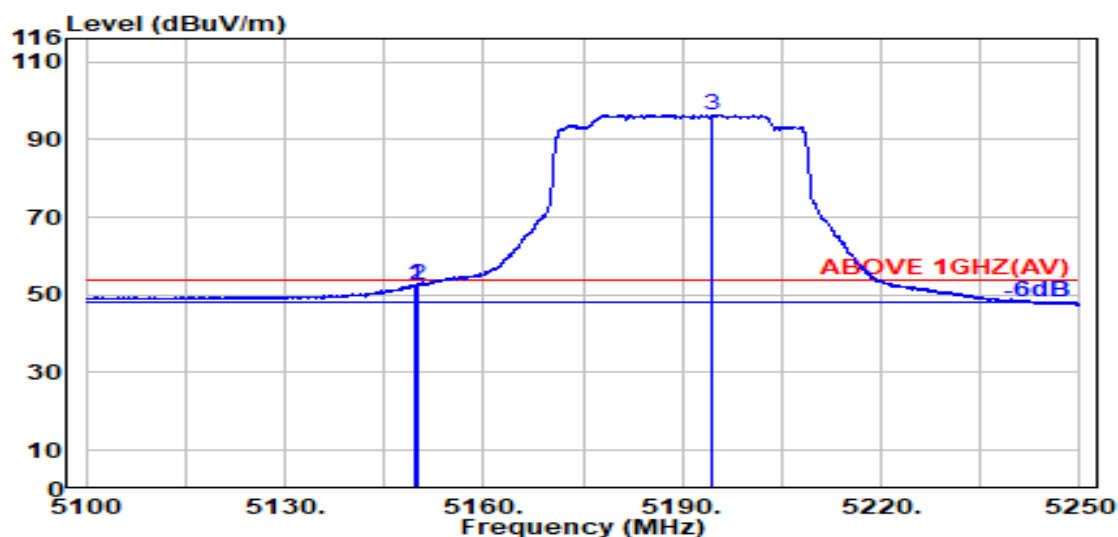


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	33.70	8.89	39.29	49.43	52.73	54.00	1.27	Average
5150.014	33.70	8.89	39.29	49.18	52.48	54.00	1.52	Average
@ 5194.543	33.70	8.91	39.28	93.17	96.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

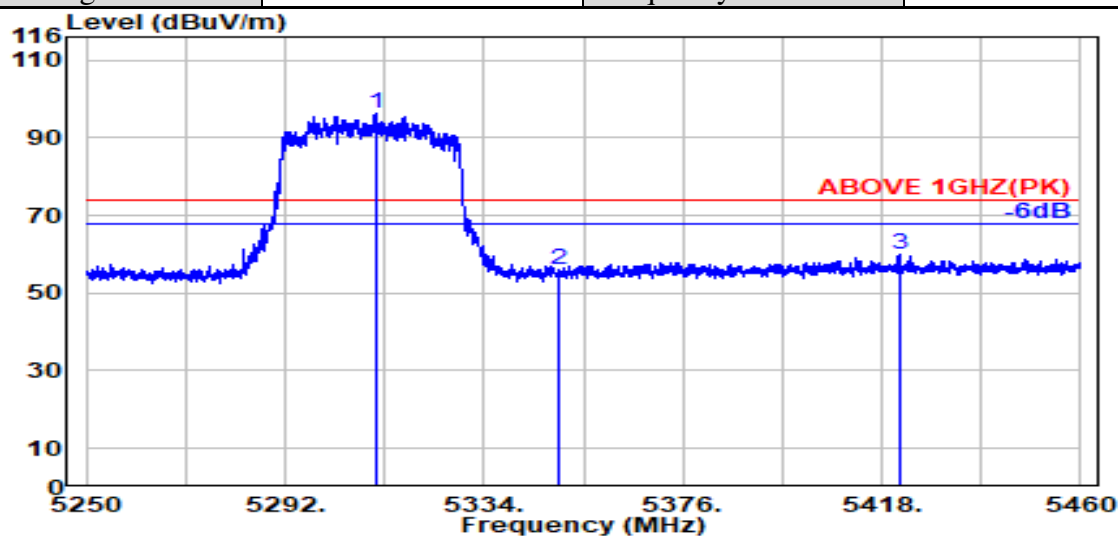

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.320	34.05	8.98	39.27	92.50	96.26	---	---	Peak
5350.000	33.90	9.00	39.27	52.21	55.83	74.00	18.17	Peak
5421.600	34.14	9.04	39.27	56.09	60.00	74.00	14.00	Peak

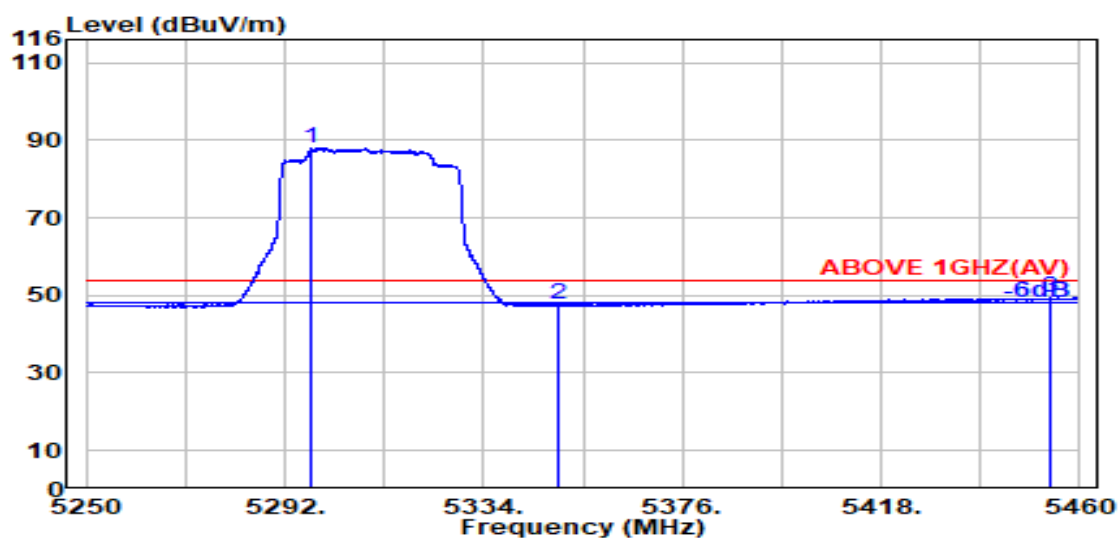


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.460	34.08	8.97	39.28	84.20	87.98	---	---	Average
5350.000	33.90	9.00	39.27	44.03	47.66	54.00	6.34	Average
5454.000	34.19	9.05	39.26	45.41	49.40	54.00	4.60	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

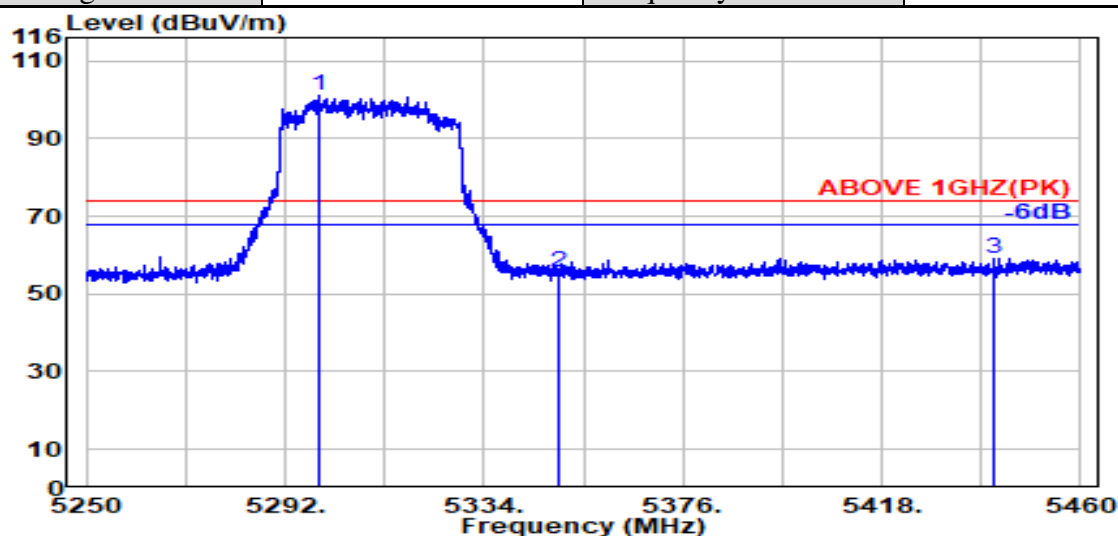

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.960	34.09	8.97	39.28	97.33	101.12	---	---	Peak
5350.000	33.90	9.00	39.27	52.18	55.80	74.00	18.20	Peak
5441.760	34.18	9.05	39.26	55.15	59.11	74.00	14.89	Peak

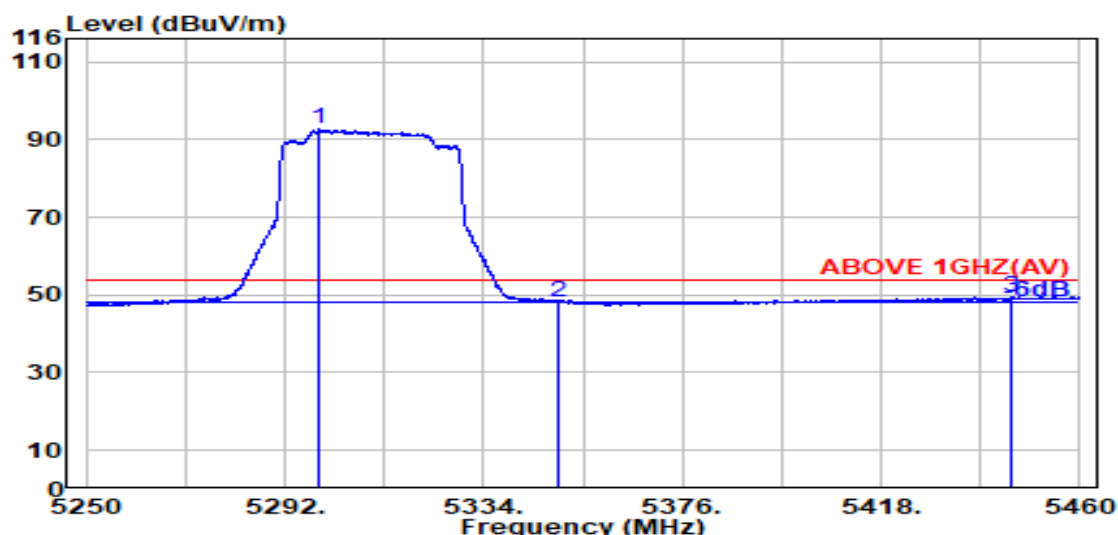

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.260	34.10	8.97	39.28	88.92	92.71	---	---	Average
5350.000	33.90	9.00	39.27	44.65	48.28	54.00	5.72	Average
5445.540	34.19	9.05	39.26	45.42	49.39	54.00	4.61	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

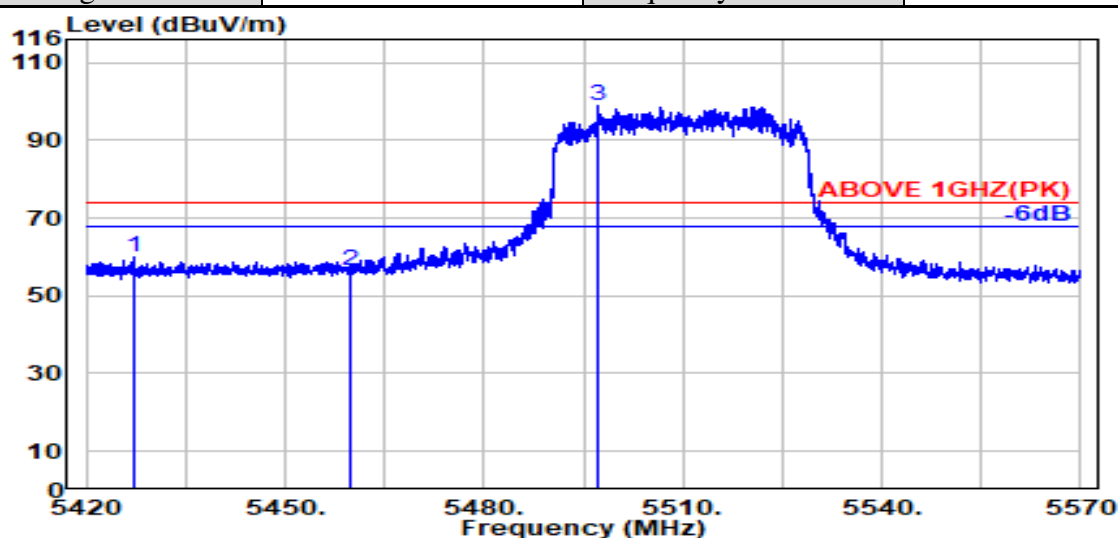

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5427.071	34.15	9.04	39.27	55.90	59.83	74.00	14.17	Peak
5459.986	34.18	9.06	39.26	52.33	56.30	74.00	17.70	Peak
@ 5497.186	34.11	9.08	39.26	94.83	98.75	---	---	Peak

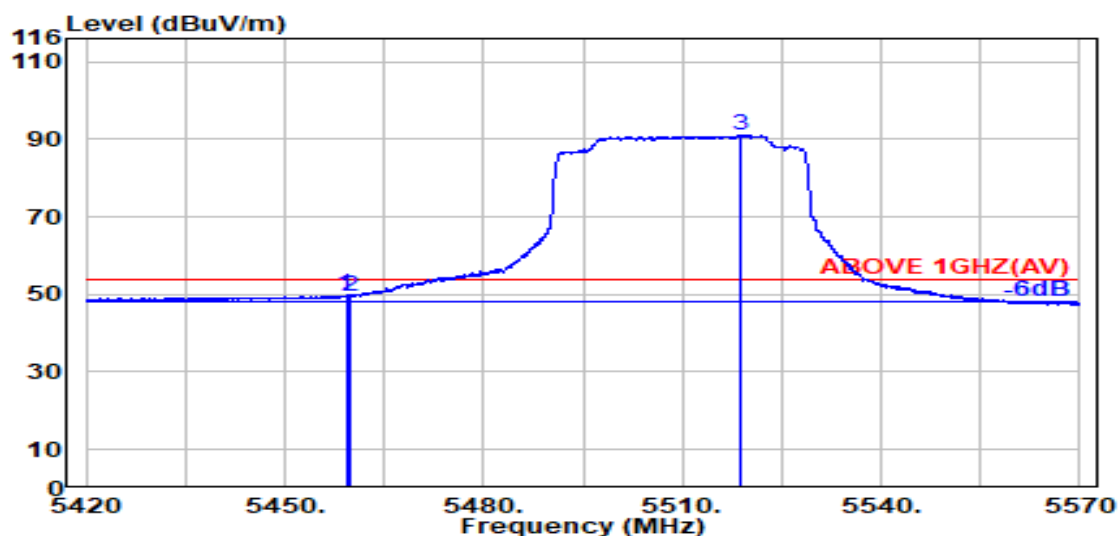

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.257	34.18	9.06	39.26	45.85	49.82	54.00	4.18	Average
5459.986	34.18	9.06	39.26	45.49	49.46	54.00	4.54	Average
@ 5518.743	34.10	9.09	39.26	87.31	91.24	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2306288

Report Number: EM-F230366

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

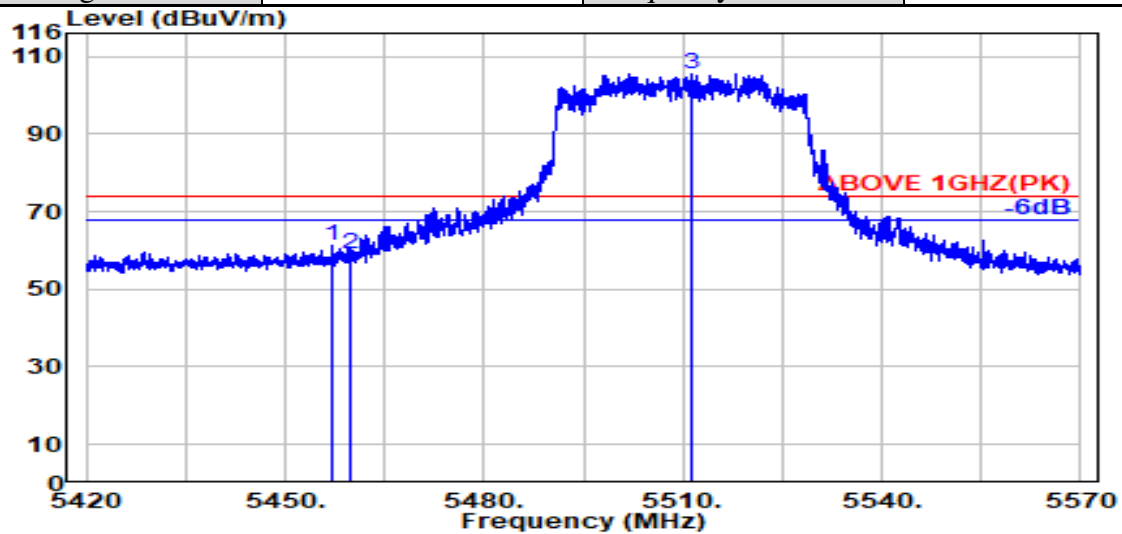

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.200	34.19	9.05	39.26	57.25	61.22	74.00	12.78	Peak
5459.986	34.18	9.06	39.26	54.91	58.89	74.00	15.11	Peak
@ 5511.157	34.10	9.08	39.26	101.74	105.66	---	---	Peak

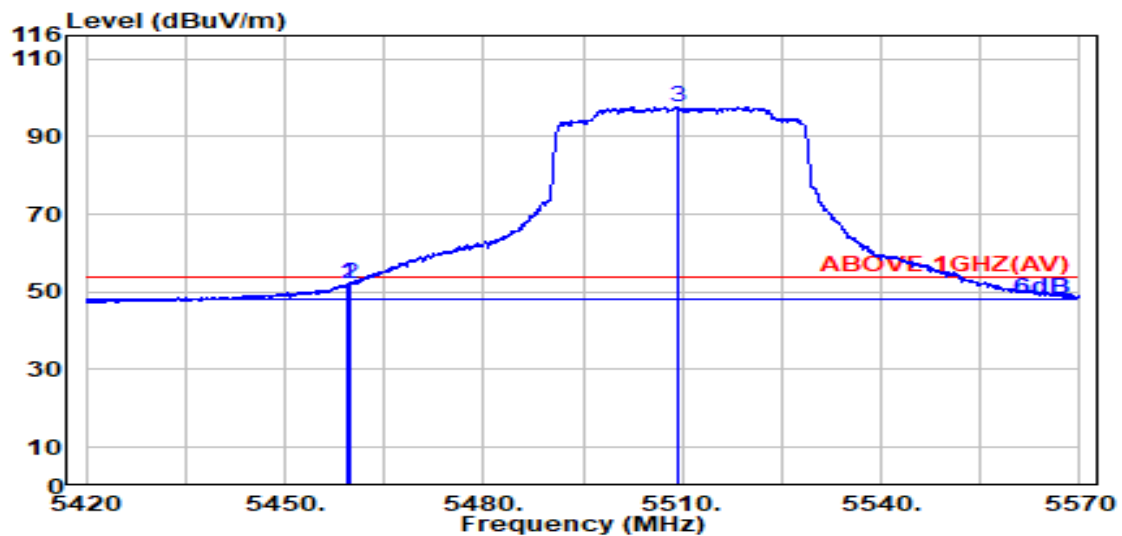

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.600	34.18	9.06	39.26	48.10	52.08	54.00	1.92	Average
5459.986	34.18	9.06	39.26	47.98	51.95	54.00	2.05	Average
@ 5509.443	34.10	9.08	39.26	93.68	97.60	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2306288

Report Number: EM-F230366


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

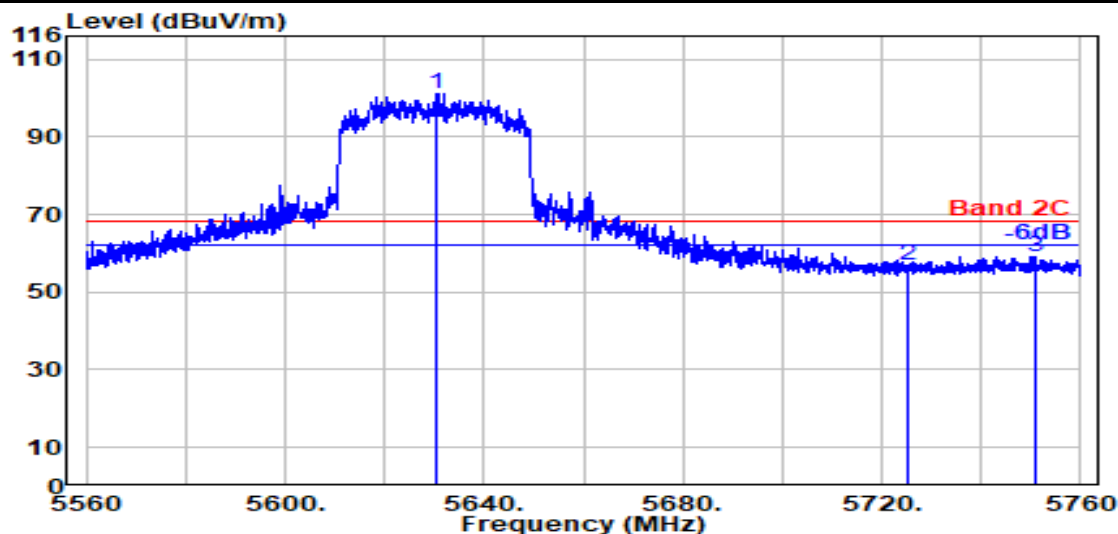

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5630.628	34.00	9.15	39.29	97.45	101.31	---	---	Peak
5725.000	33.80	9.19	39.31	53.02	56.70	68.20	11.50	Peak
5750.971	33.80	9.21	39.31	55.54	59.24	68.20	8.96	Peak

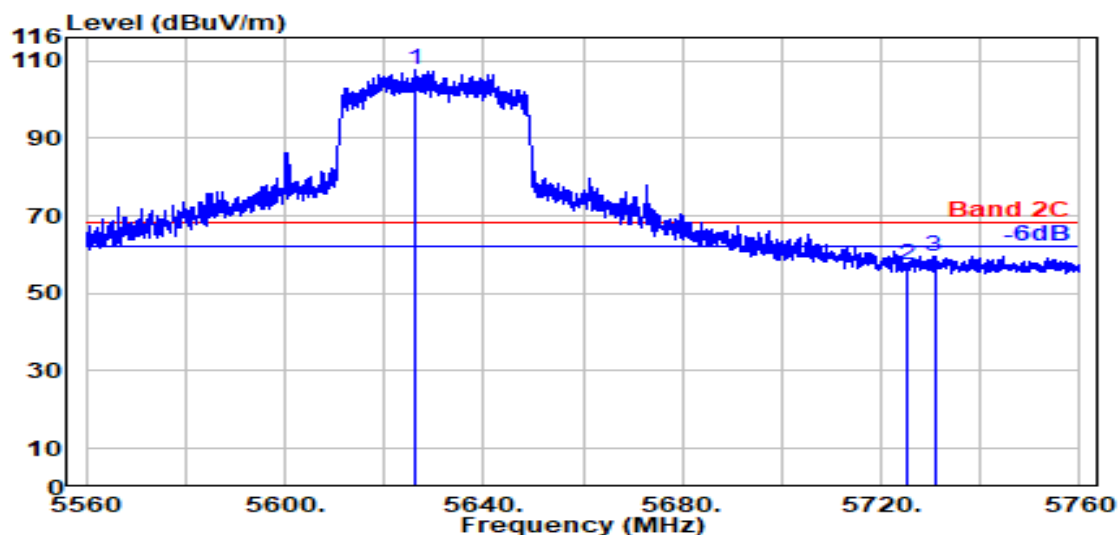

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.229	34.00	9.14	39.29	103.67	107.53	---	---	Peak
5725.000	33.80	9.19	39.31	53.65	57.33	68.20	10.87	Peak
5730.743	33.80	9.20	39.31	56.04	59.73	68.20	8.47	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2306288

Report Number: EM-F230366


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

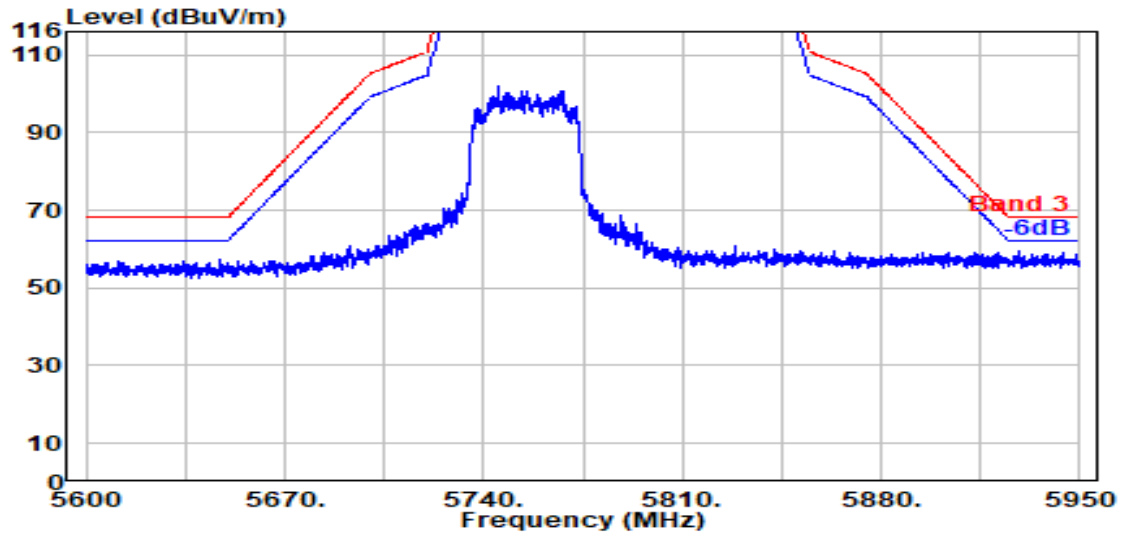

Antenna at Vertical Polarization

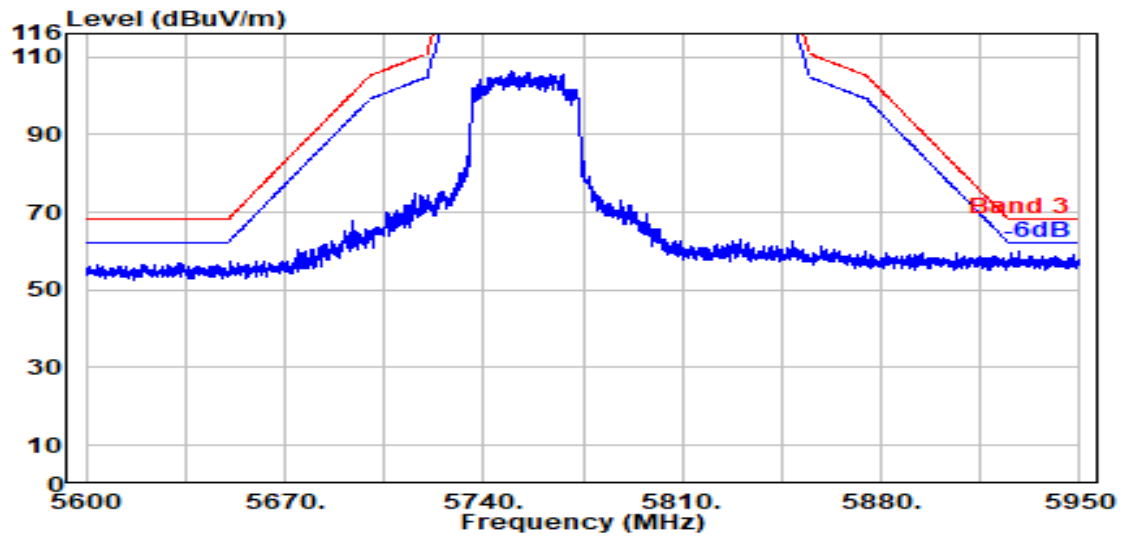


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

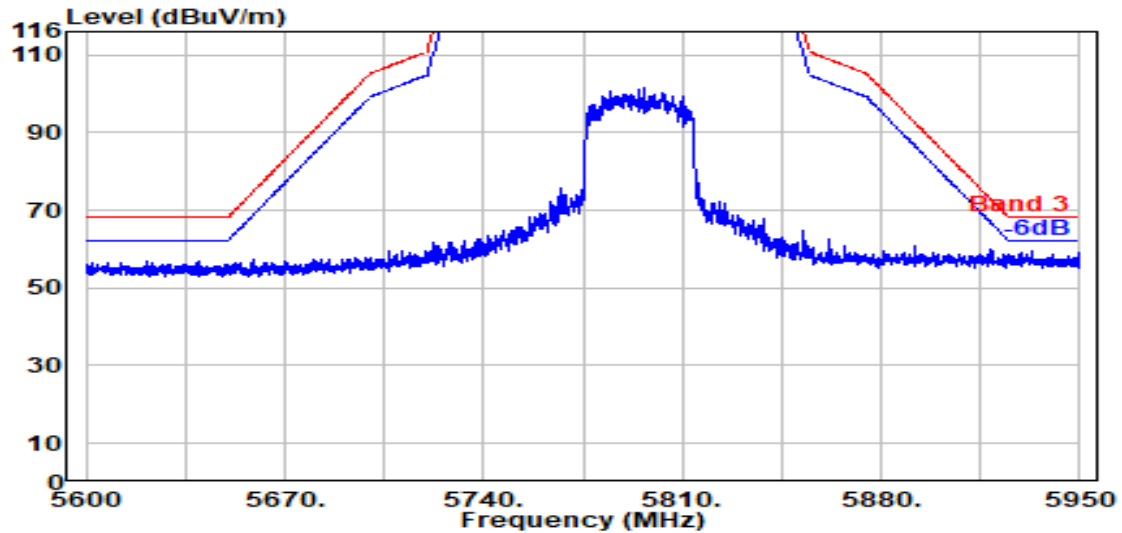

Antenna at Vertical Polarization

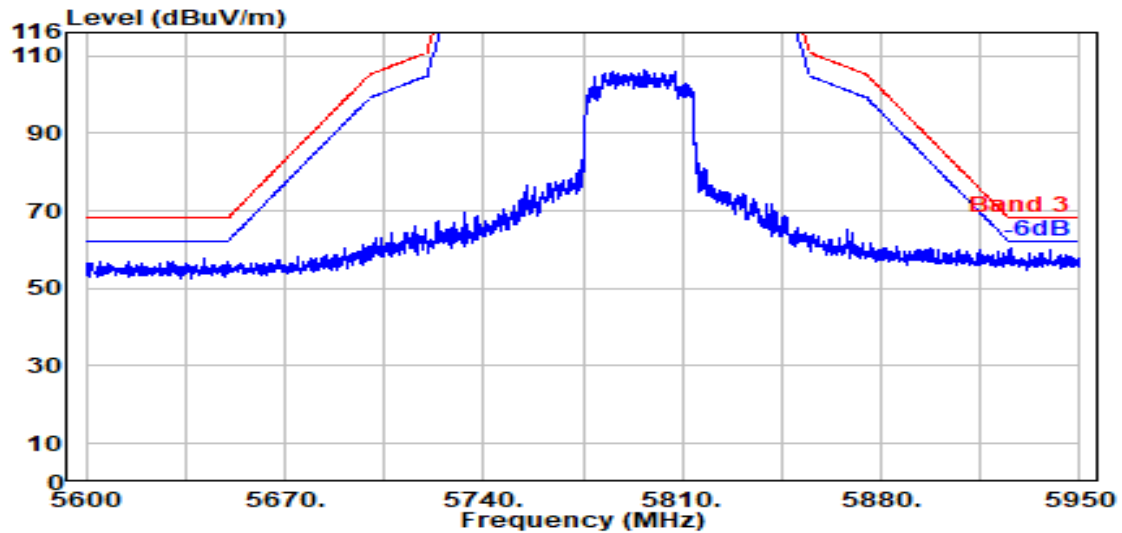


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

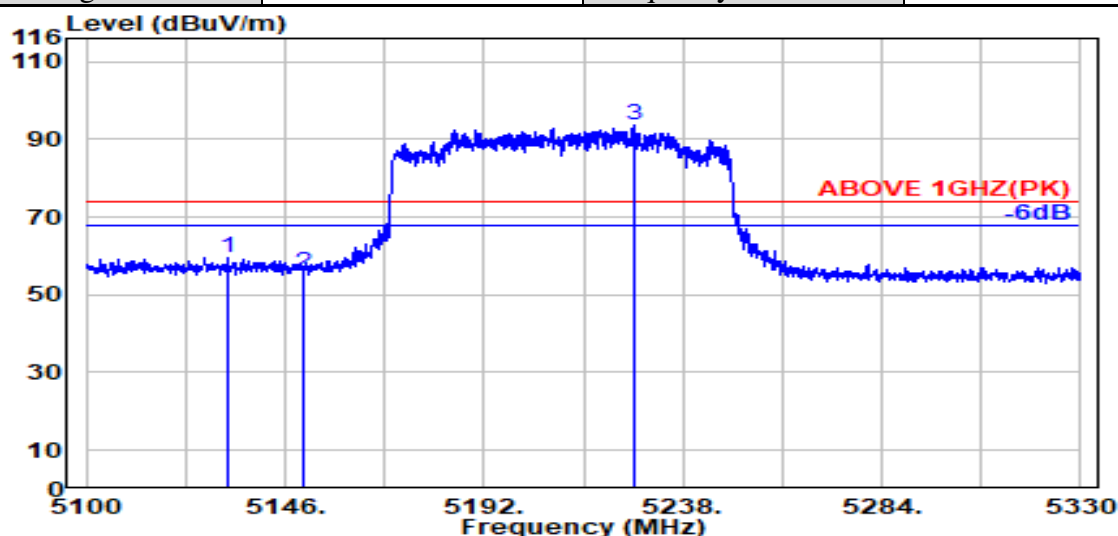

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.700	33.70	8.88	39.29	56.40	59.69	74.00	14.31	Peak
5150.000	33.70	8.89	39.29	52.31	55.61	74.00	18.39	Peak
@ 5226.500	33.75	8.93	39.28	90.11	93.51	---	---	Peak

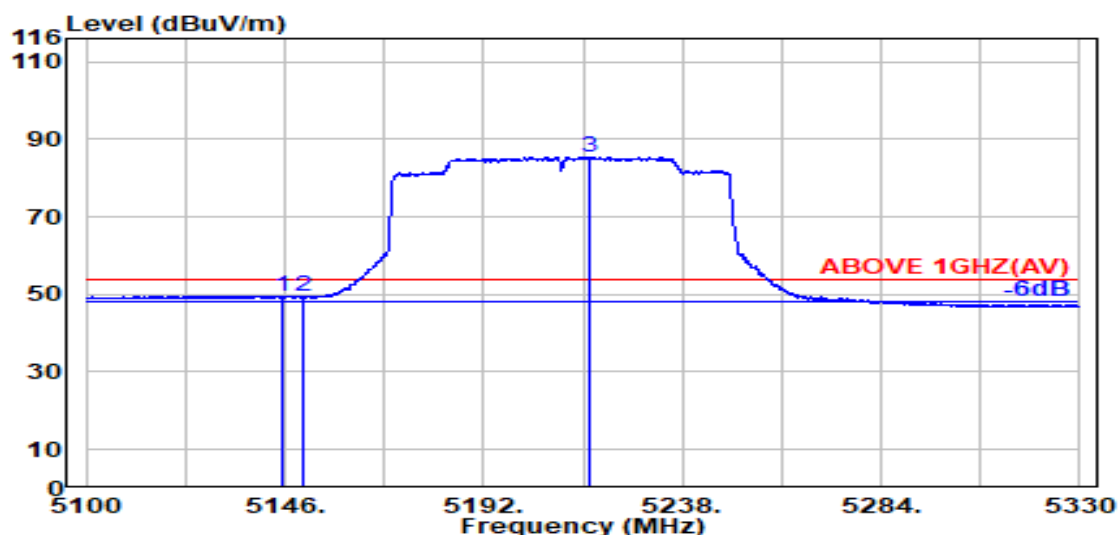


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.70	8.88	39.29	46.32	49.62	54.00	4.38	Average
5150.000	33.70	8.89	39.29	46.05	49.34	54.00	4.66	Average
@ 5216.300	33.73	8.92	39.28	82.17	85.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

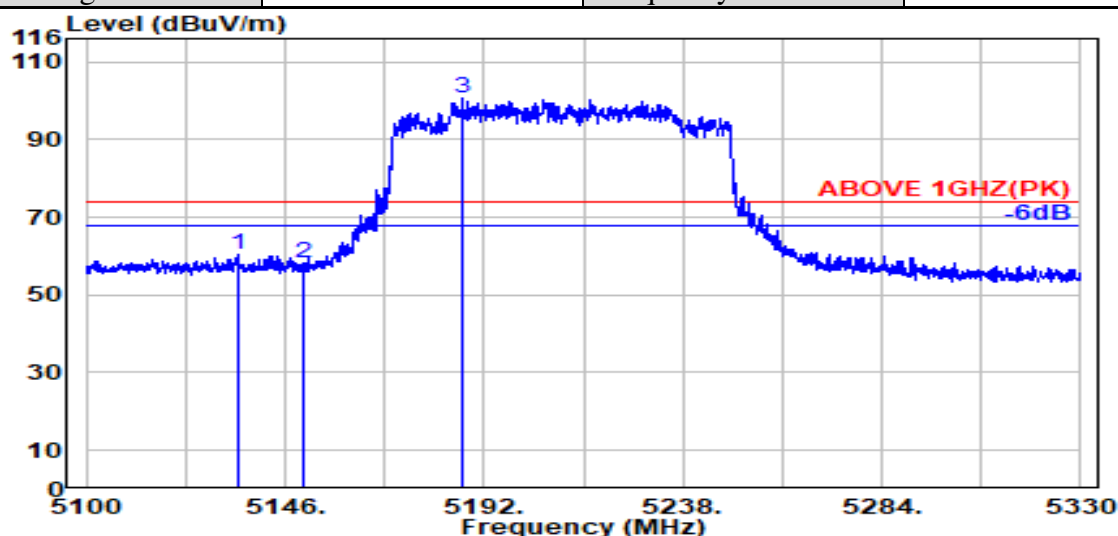

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.900	33.70	8.88	39.29	57.08	60.36	74.00	13.64	Peak
5150.000	33.70	8.89	39.29	55.07	58.37	74.00	15.63	Peak
@ 5186.900	33.70	8.91	39.28	97.48	100.80	---	---	Peak

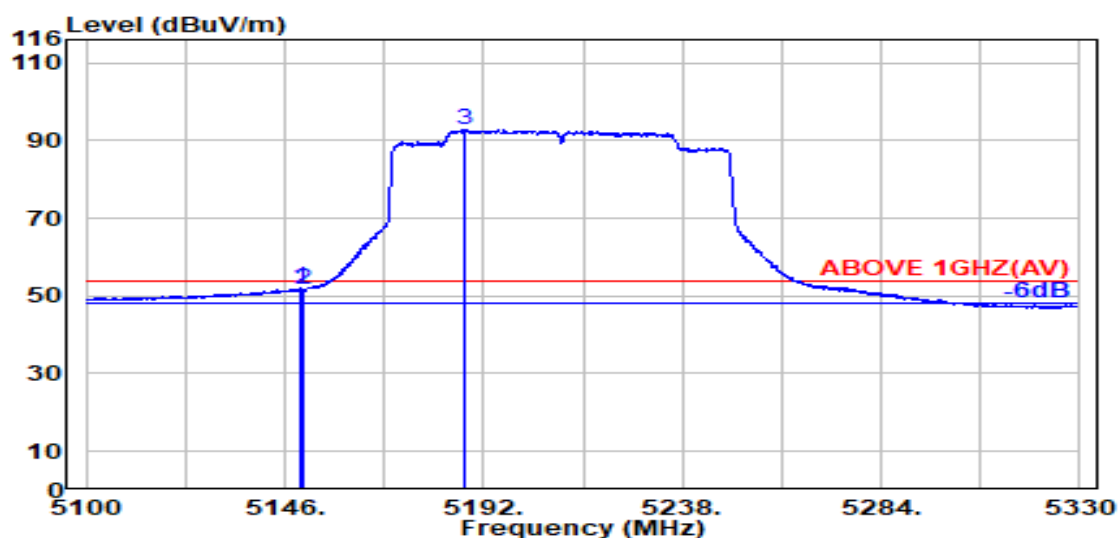


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.89	39.29	48.58	51.87	54.00	2.13	Average
5150.000	33.70	8.89	39.29	48.18	51.48	54.00	2.52	Average
@ 5187.800	33.70	8.91	39.28	89.33	92.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

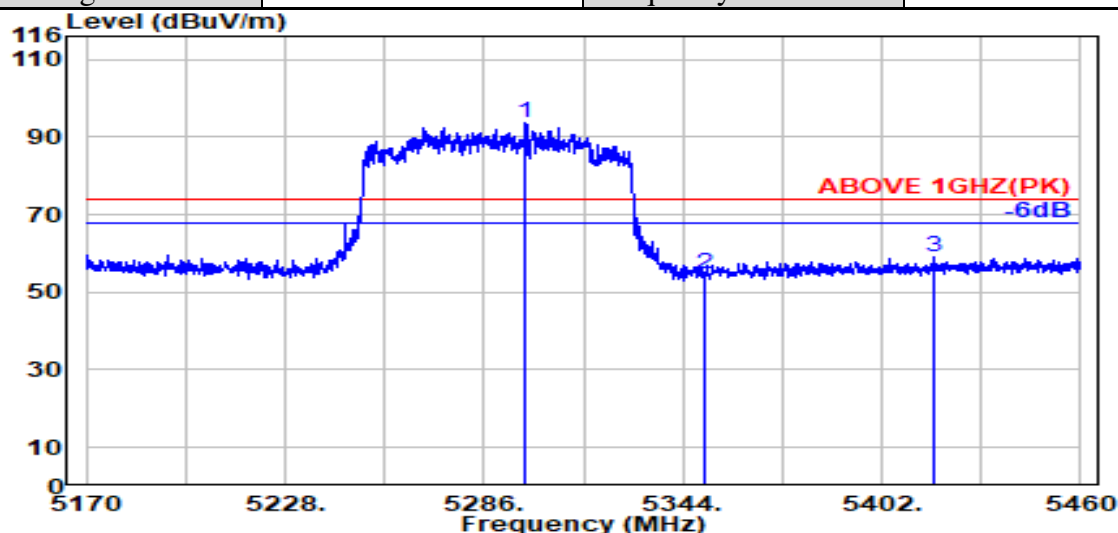

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.200	34.09	8.97	39.28	89.74	93.52	---	---	Peak
5350.000	33.90	9.00	39.27	51.27	54.89	74.00	19.11	Peak
5416.900	34.13	9.03	39.27	55.26	59.16	74.00	14.84	Peak

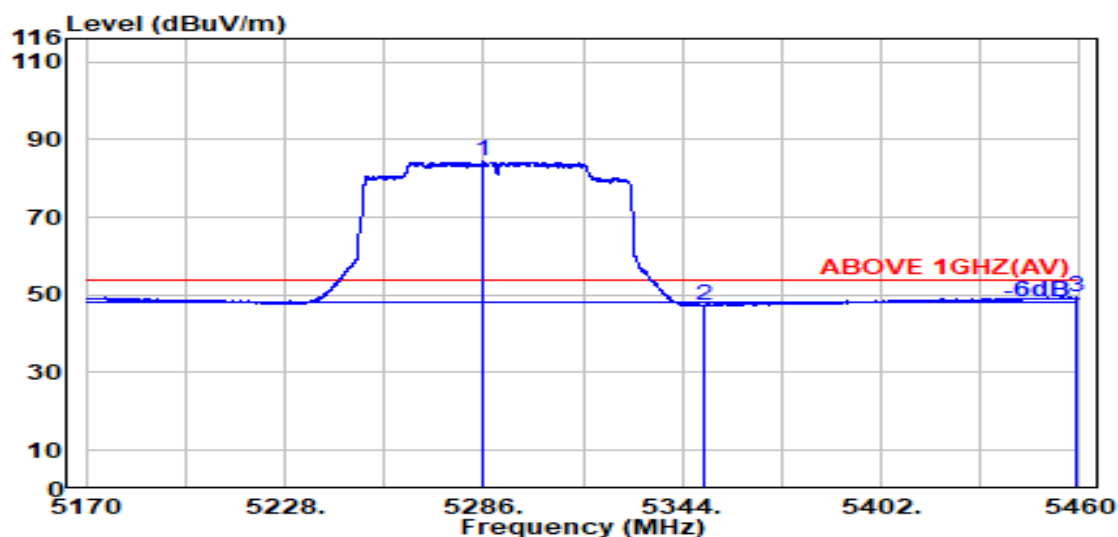

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.000	34.02	8.96	39.28	80.60	84.30	---	---	Average
5350.000	33.90	9.00	39.27	43.67	47.30	54.00	6.70	Average
5459.000	34.18	9.06	39.26	45.69	49.66	54.00	4.34	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

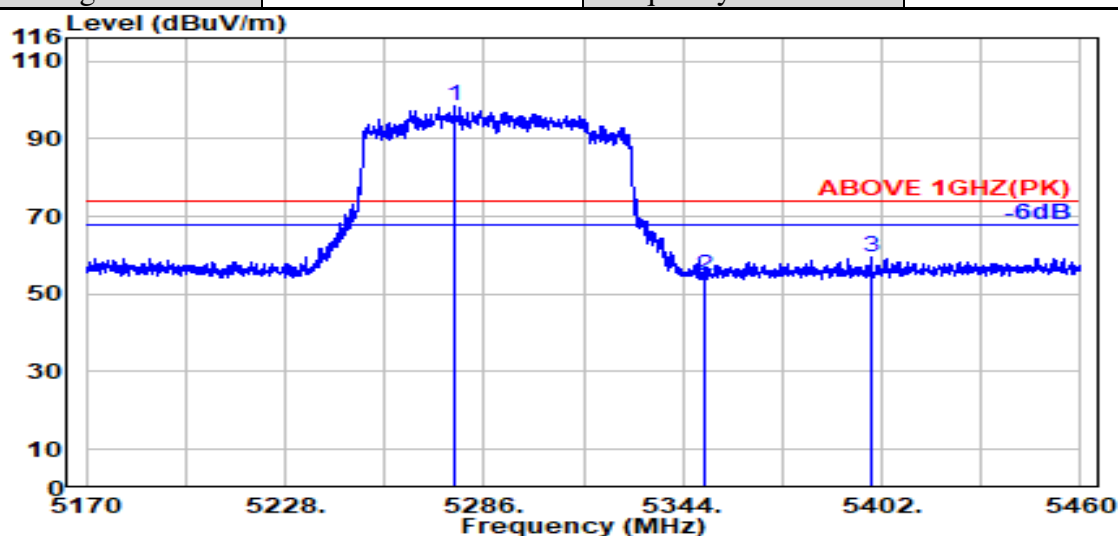

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5277.400	33.96	8.96	39.28	94.84	98.49	---	---	Peak
5350.000	33.90	9.00	39.27	51.23	54.86	74.00	19.14	Peak
5398.900	34.10	9.02	39.27	55.66	59.51	74.00	14.49	Peak

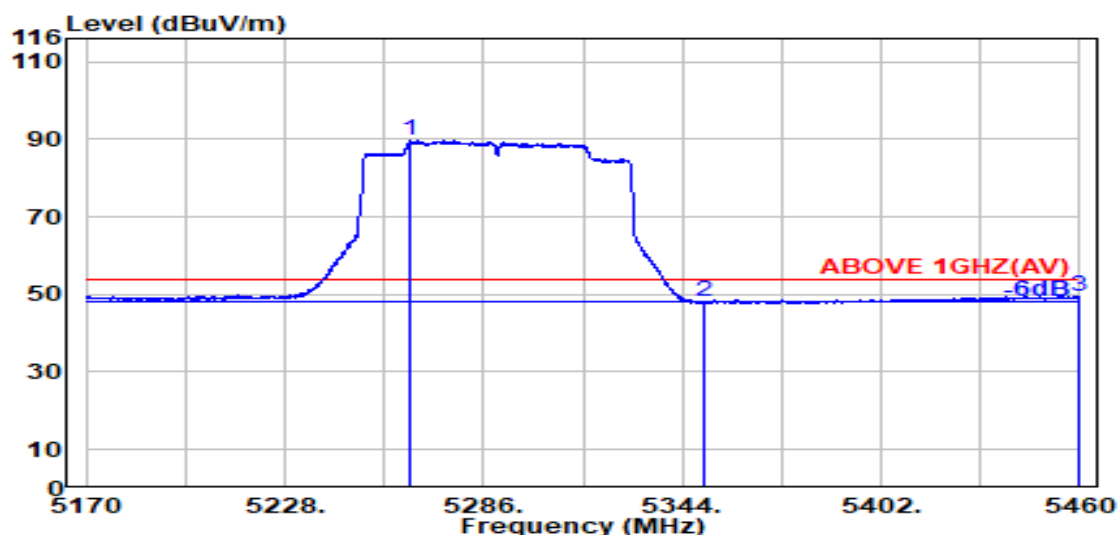


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5264.700	33.89	8.95	39.28	86.13	89.69	---	---	Average
5350.000	33.90	9.00	39.27	44.61	48.24	54.00	5.76	Average
5459.600	34.18	9.06	39.26	45.45	49.42	54.00	4.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

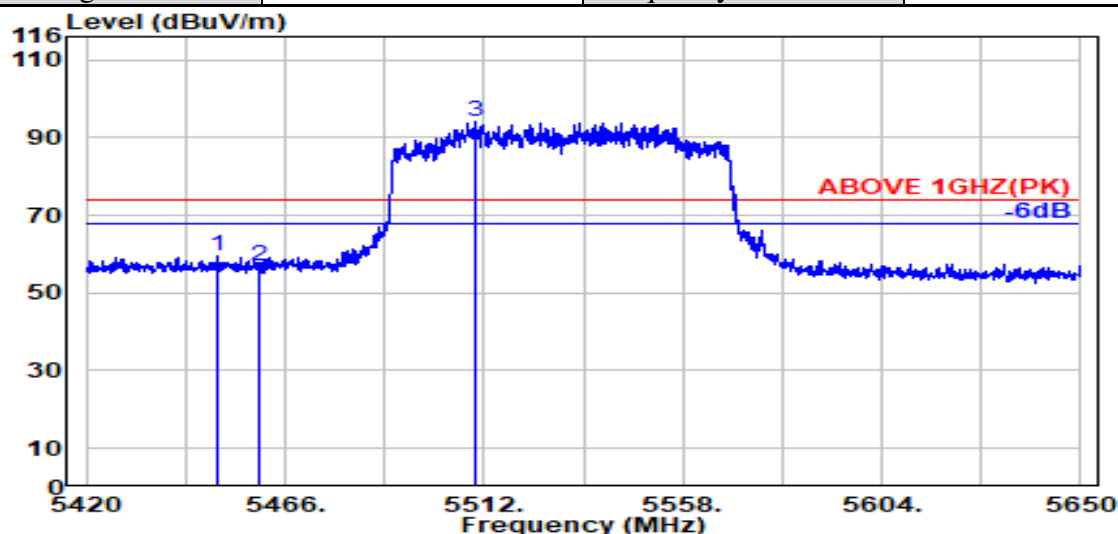

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.300	34.20	9.05	39.26	55.65	59.63	74.00	14.37	Peak
5460.000	34.18	9.06	39.26	53.08	57.06	74.00	16.94	Peak
@ 5509.800	34.10	9.08	39.26	90.23	94.15	---	---	Peak

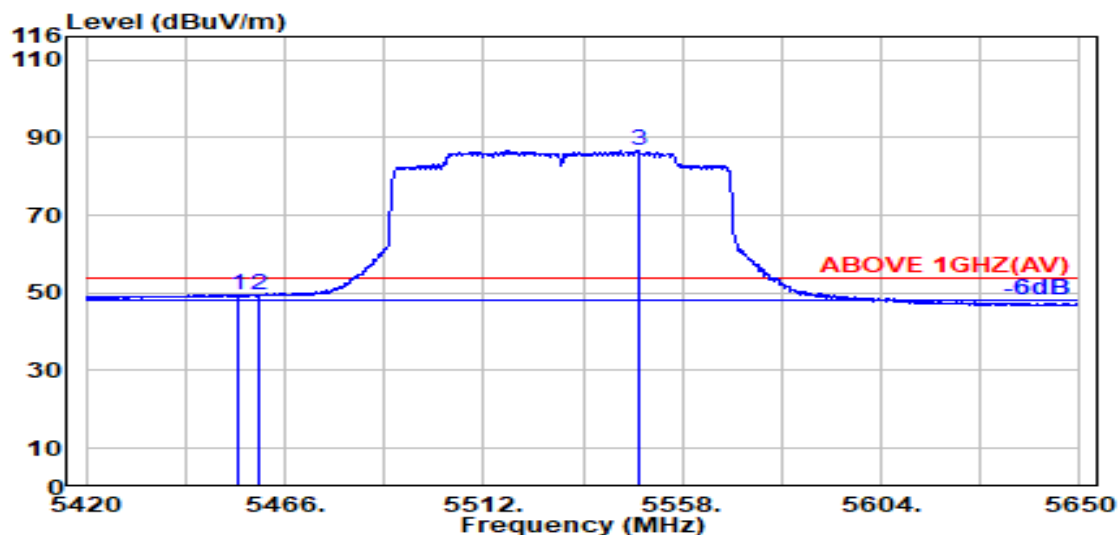


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.400	34.19	9.05	39.26	45.61	49.59	54.00	4.41	Average
5460.000	34.18	9.06	39.26	45.38	49.35	54.00	4.65	Average
@ 5547.800	34.10	9.10	39.27	82.67	86.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

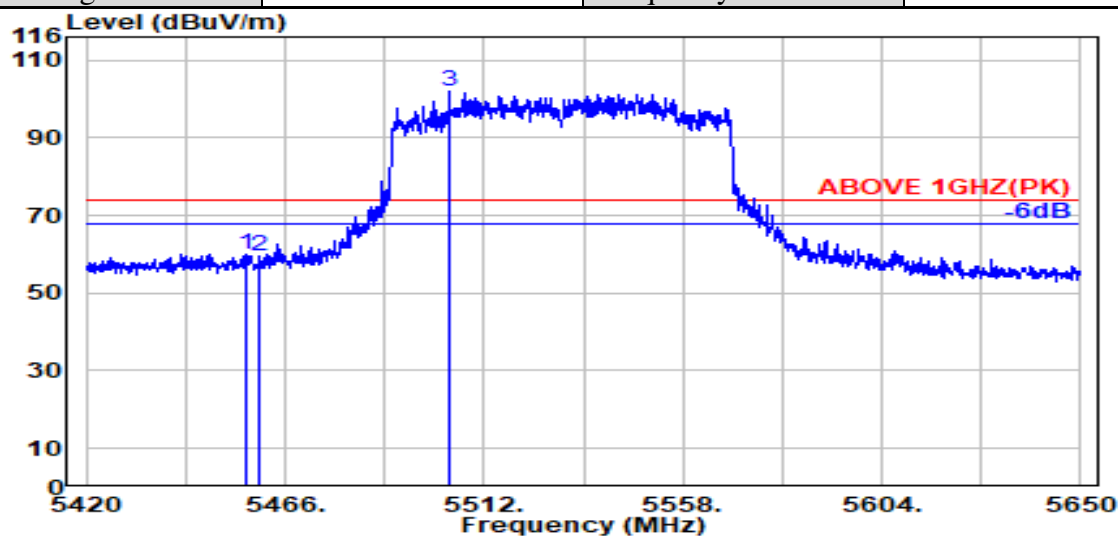

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.700	34.19	9.05	39.26	55.96	59.94	74.00	14.06	Peak
5460.000	34.18	9.06	39.26	55.66	59.63	74.00	14.37	Peak
@ 5504.000	34.10	9.08	39.26	98.15	102.07	---	---	Peak

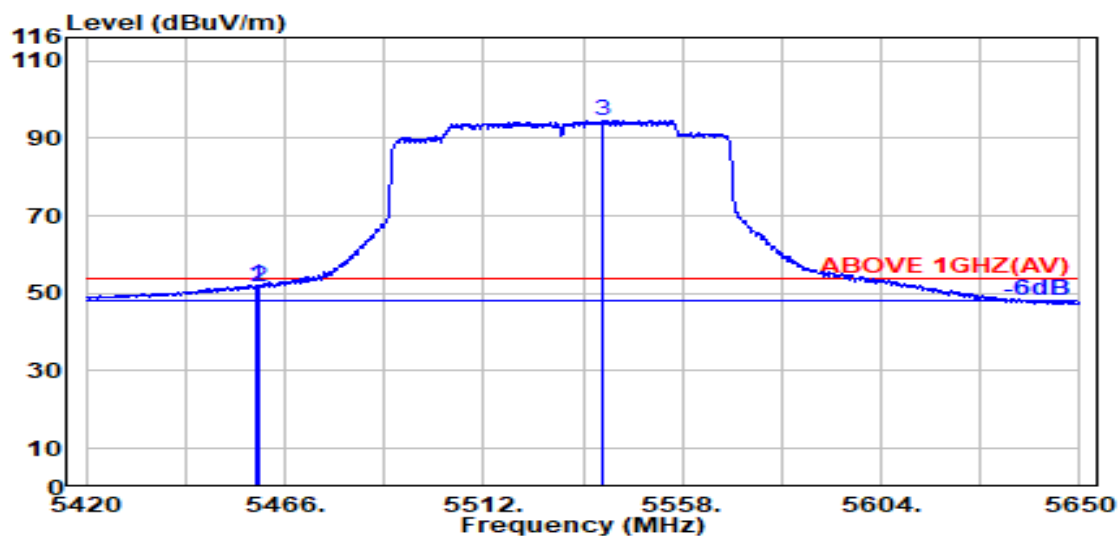


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.18	9.06	39.26	48.08	52.05	54.00	1.95	Average
5460.000	34.18	9.06	39.26	47.52	51.49	54.00	2.51	Average
@ 5539.300	34.10	9.10	39.27	90.79	94.72	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

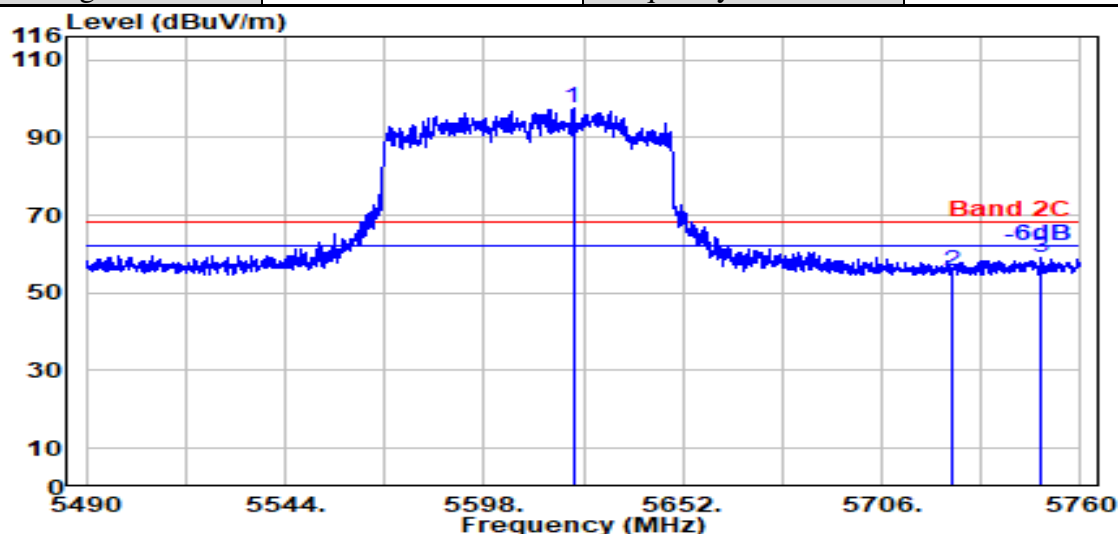

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5622.200	34.00	9.14	39.29	93.66	97.51	---	---	Peak
	5725.000	33.80	9.19	39.31	51.95	55.64	68.20	12.56	Peak
	5749.300	33.80	9.21	39.31	55.48	59.18	68.20	9.02	Peak

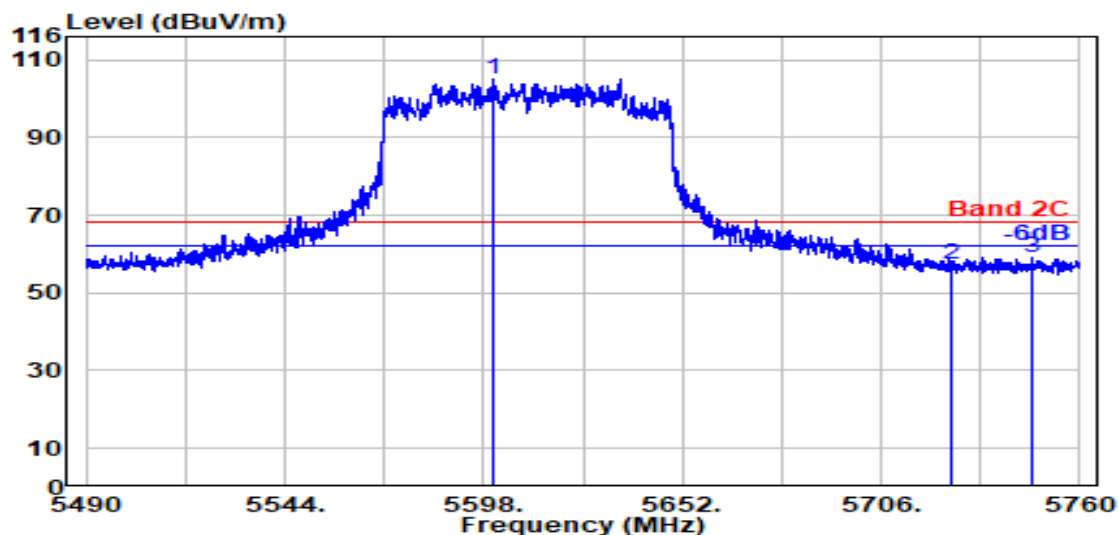

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5600.700	34.00	9.13	39.28	101.40	105.25	---	---	Peak
	5725.000	33.80	9.19	39.31	53.52	57.21	68.20	10.99	Peak
	5747.000	33.80	9.20	39.31	55.35	59.04	68.20	9.16	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.76	13.26	39.07	34.74	47.70	54.00	6.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.76	13.26	39.07	34.03	46.98	54.00	7.02	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.56	39.13	33.83	47.25	54.00	6.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.56	39.13	33.71	47.13	54.00	6.87	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.30	13.78	39.21	34.25	48.12	54.00	5.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.30	13.78	39.21	34.87	48.74	54.00	5.26	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.52	39.12	33.46	46.76	54.00	7.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.52	39.12	34.47	47.78	54.00	6.22	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.56	39.13	33.88	47.30	54.00	6.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.56	39.13	33.37	46.78	54.00	7.22	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.08	13.62	39.14	32.53	46.09	54.00	7.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.08	13.62	39.14	33.98	47.54	54.00	6.46	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.20	39.05	34.69	47.54	54.00	6.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.20	39.05	33.69	46.54	54.00	7.46	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.94	13.54	39.12	33.63	46.99	54.00	7.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.94	13.54	39.12	34.15	47.51	54.00	6.49	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.11	13.64	39.14	32.53	46.13	54.00	7.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.11	13.64	39.14	34.08	47.69	54.00	6.31	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	13.16	39.04	34.55	47.36	54.00	6.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	13.16	39.04	34.31	47.12	54.00	6.88	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.15	13.68	39.16	33.51	47.18	54.00	6.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.15	13.68	39.16	32.76	46.42	54.00	7.58	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	13.24	39.06	35.63	48.55	54.00	5.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	13.24	39.06	32.52	45.45	54.00	8.55	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.76	13.26	39.07	33.32	46.28	54.00	7.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.76	13.26	39.07	33.85	46.81	54.00	7.19	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.17	13.70	39.17	34.99	48.69	54.00	5.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.17	13.70	39.17	32.82	46.52	54.00	7.48	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.20	39.05	33.79	46.64	54.00	7.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.70	13.20	39.05	32.77	45.61	54.00	8.39	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.11	13.64	39.14	32.14	45.74	54.00	8.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.11	13.64	39.14	34.01	47.61	54.00	6.39	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.14	12.66	39.42	34.90	46.28	54.00	7.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.14	12.66	39.42	33.25	44.64	54.00	9.36	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.78	13.33	39.08	33.23	46.26	54.00	7.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.78	13.33	39.08	32.54	45.57	54.00	8.43	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.15	13.68	39.16	33.40	47.06	54.00	6.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.15	13.68	39.16	33.93	47.59	54.00	6.41	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	13.24	39.06	34.16	47.08	54.00	6.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	13.24	39.06	34.36	47.28	54.00	6.72	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 MAXIMUM OUTPUT POWER

Test Date	2023/06/29 ~ 07/19	Temp./Hum.	24 ~ 25°C/55%
Cable Loss	1.0dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Average Output Power

● SPOT Check

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power (dBm)
		Aux	Main		
802.11a	5180	16.410	16.720	0.101	16.821
	5200	16.540	16.580		16.681
	5240	16.660	16.510		16.761
	5260	16.490	16.740		16.841
	5300	16.560	16.580		16.681
	5320	16.530	16.790		16.891
	5500	17.030	16.760		17.131
	5580	16.710	16.730		16.831
	5700	17.000	16.800		17.101
	5720	16.960	16.900		17.061
	5745	16.820	16.790		16.921
	5785	17.000	16.530		17.101
	5825	17.060	16.680		17.161

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total. Average Output Power (dBm)
		Aux	Main		
802.11n-HT20	5180	16.480	16.450	N/A	19.475
	5200	16.300	16.420		19.371
	5240	16.420	16.610		19.526
	5260	16.300	16.470		19.396
	5300	15.850	16.370		19.128
	5320	16.220	16.460		19.352
	5500	16.490	16.430		19.470
	5580	16.760	16.400		19.594
	5700	16.790	16.460		19.638
	5720	16.780	16.530		19.667
	5745	16.830	16.550		19.703
	5785	16.830	16.470		19.664
	5825	16.860	16.250		19.576
802.11n-HT40	5190	15.230	15.410	N/A	18.331
	5230	16.900	16.740		19.831
	5270	16.820	16.870		19.855
	5310	14.840	15.210		18.039
	5510	17.030	16.830		19.941
	5550	17.240	16.960		20.113
	5670	17.110	16.840		19.987
	5710	17.160	16.860		20.023
	5755	17.210	16.990		20.112
	5795	17.380	16.720		20.073
802.11ac-VHT80	5210	13.770	13.770	N/A	16.780
	5290	13.850	13.970		16.921
	5530	13.860	13.740		16.811
	5610	16.130	15.910		19.032
	5690	16.230	16.080		19.166
	5775	16.450	16.240		19.357
802.11ac-VHT160	5250	10.890	10.670	N/A	13.792
	5570	13.430	13.730		16.593

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total. Average Output Power (dBm)
		Aux	Main		
802.11ax-HE20	5180	16.480	15.970	N/A	19.243
	5200	16.520	16.100		19.325
	5240	16.650	16.420		19.547
	5260	16.410	16.530		19.481
	5300	16.380	16.380		19.390
	5320	16.390	16.370		19.390
	5500	16.580	16.630		19.615
	5580	16.880	16.590		19.748
	5700	16.910	16.590		19.763
	5720	16.890	16.590		19.753
	5745	17.020	16.670		19.859
	5785	16.930	16.600		19.778
	5825	16.980	16.370		19.696
802.11ax-HE40	5190	14.850	15.080	N/A	17.977
	5230	16.620	16.510		19.576
	5270	16.500	16.520		19.520
	5310	14.680	14.970		17.838
	5510	16.760	16.680		19.730
	5550	17.010	16.710		19.873
	5670	16.830	16.530		19.693
	5710	16.990	16.750		19.882
	5755	16.970	16.630		19.814
	5795	17.050	16.550		19.817
802.11ax-HE80	5210	13.340	13.420	N/A	16.390
	5290	13.470	13.730		16.612
	5530	13.600	13.580		16.600
	5610	15.920	15.720		18.831
	5690	15.940	15.840		18.901
	5775	16.090	16.120		19.115
802.11ax-HE160	5250	10.670	10.360	0.092	13.620
	5570	13.340	13.540		16.543

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power (dBm)		10log (1/X)	Total. Average Output Power (dBm)
			Aux	Main		
802.11ax-HE20	5180	26/0	9.410	9.560	0.164	12.660
		52/37	13.080	13.140	0.146	16.266
		106/53	15.730	15.550	N/A	18.651
	5320	26/8	9.440	9.510	0.164	12.649
		52/40	12.930	12.830	0.146	16.037
		106/54	15.510	15.480	N/A	18.505
	5500	26/0	9.810	9.720	0.164	12.940
		52/37	13.270	13.210	0.146	16.396
		106/53	15.050	15.120	N/A	18.095
	5700	26/8	9.360	9.390	0.164	12.549
		52/40	13.030	12.930	0.146	16.137
		106/54	16.040	15.870	N/A	18.966
	5745	26/0	15.640	15.410	0.164	18.701
		52/37	12.890	12.880	0.146	16.041
		106/53	17.050	16.950	N/A	20.011
	5825	26/8	15.740	15.240	0.164	18.671
		52/40	13.220	12.900	0.146	16.219
		106/54	17.300	16.900	N/A	20.115
802.11ax-HE40	5190	242/61	15.960	16.070	0.164	19.190
	5310	242/62	15.710	15.810		18.935
	5510	242/61	16.710	16.820		19.940
	5670	242/62	17.230	17.270		20.424
	5755	242/61	16.890	16.750		19.995
	5795	242/62	17.460	17.050		20.434
802.11ax-HE80	5210	484/65	14.010	14.110	0.092	17.163
	5290	484/66	11.830	11.910		14.972
	5530	484/65	15.030	15.210		18.223
	5610	484/66	17.080	16.850		20.069
	5775	484/65	17.030	16.980		20.107
	5775	484/66	17.050	16.810		20.034
802.11ax-HE160	5250	996/67	13.440	13.700	0.177	16.759
		996/S67	11.780	12.090		15.125
	5570	996/67	13.630	13.730		16.868
		996/S67	17.190	17.110		20.337

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● Original FCC ID: BEJNT-16Z90R Power

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	23.59	23.98	16.682	16.681	16.610	16.980	0.101	17.081	24	N/A
	5200	23.26	23.01	16.645	16.626	16.690	16.790		16.891		
	5240	23.02	23.14	16.678	16.657	16.920	16.740		17.021		
U-NII Band 2A	5260	23.25	21.60	16.663	16.581	16.790	16.910		17.011		24.34
	5300	23.51	22.87	16.663	16.632	16.710	16.870		16.971		24.59
	5320	23.00	23.17	16.693	16.681	16.680	16.980		17.081		24.62
U-NII Band 2C	5500	22.99	23.26	16.664	16.680	17.240	16.980		17.341		24.62
	5580	23.23	23.20	16.675	16.658	16.940	17.000		17.101		24.65
	5700	23.38	23.39	16.680	16.595	17.210	17.040		17.311		24.69
	5720	23.28	23.59	16.624	16.635	17.170	17.100		17.271		24.67
Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	15.09	15.43	16.655	16.612	17.140	17.000	0.101	17.241	30	N/A
	5785	15.36	14.98	16.657	16.715	17.270	16.950		17.371		
	5825	15.47	15.12	16.660	16.616	17.320	16.810		17.421		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	23.96	23.82	17.761	17.770	16.540	16.500	N/A	19.530	24	N/A
	5200	23.34	23.51	17.758	17.756	16.450	16.520		19.495		
	5240	23.67	23.35	17.765	17.758	16.610	16.670		19.650		
U-NII Band 2A	5260	23.59	23.41	17.745	17.773	16.350	16.650		19.513		24.69
	5300	23.55	23.19	17.771	17.757	15.940	16.480		19.229		24.65
	5320	24.11	23.80	17.774	17.756	16.370	16.510		19.451		24.77
U-NII Band 2C	5500	23.89	23.23	17.768	17.740	16.630	16.610		19.630		24.66
	5580	23.14	23.20	17.776	17.778	16.860	16.600		19.742		24.64
	5700	22.77	24.19	17.755	17.720	16.870	16.660		19.777		24.57
	5720	23.51	24.06	17.739	17.789	16.930	16.670		19.812		24.71
Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	13.82	16.88	17.743	17.759	16.980	16.690	N/A	19.848	30	N/A
	5785	15.07	15.00	17.727	17.763	16.970	16.570		19.785		
	5825	13.80	15.37	17.764	17.751	17.010	16.370		19.712		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	42.55	41.95	36.075	35.963	15.370	15.520	N/A	18.456	24	N/A
	5230	42.84	41.01	36.001	35.951	16.960	16.920		19.950		
U-NII Band 2A	5270	42.12	41.64	36.015	36.031	16.880	16.950		19.925		27.20
	5310	42.42	41.41	36.027	36.068	15.020	15.270		18.157		27.17
U-NII Band 2C	5510	43.37	41.24	36.052	36.051	17.080	17.010		20.055		27.15
	5550	41.90	42.09	36.044	36.005	17.310	17.160		20.246		27.22
	5670	41.87	41.98	36.031	36.001	17.220	16.930		20.088		27.22
	5710	41.96	41.48	36.055	36.019	17.350	17.010		20.194		27.18
Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	35.06	35.45	36.036	36.023	17.390	17.060	N/A	20.238	30	N/A
	5795	32.67	35.71	36.043	35.983	17.440	16.830		20.156		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	83.16	83.86	75.103	75.135	14.010	14.050	N/A	17.040	24	N/A
U-NII Band 2A	5290	82.28	82.84	75.122	74.996	14.070	14.360		17.228		30.15
U-NII Band 2C	5530	83.01	82.04	75.099	75.044	14.170	14.170		17.180		30.14
	5610	88.07	82.72	75.299	75.055	16.490	16.380		19.446		30.18
	5690	85.09	82.79	75.241	75.204	16.500	16.500		19.510		30.18
Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	73.88	75.16	75.095	75.196	16.850	16.780	N/A	19.825	30	N/A

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	161.60	161.00	153.410	153.330	11.290	10.960	N/A	14.138	24	33.07
U-NII Band 2C	5570	163.40	161.10	153.510	153.490	13.960	14.030		17.005		33.07

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	24.18	23.62	18.923	18.943	16.560	16.150	N/A	19.370	24	N/A
	5200	23.49	23.35	18.892	18.905	16.610	16.250		19.444		
	5240	23.95	23.95	18.902	18.942	16.770	16.620		19.706		
U-NII Band 2A	5260	23.54	23.25	18.886	18.904	16.570	16.590		19.590		24.66
	5300	22.98	23.50	18.940	18.892	16.540	16.580		19.570		24.61
	5320	22.85	23.56	18.920	18.895	16.510	16.570		19.550		24.59
U-NII Band 2C	5500	23.65	23.45	18.902	18.917	16.780	16.700		19.750		24.70
	5580	23.19	24.45	18.913	18.917	17.030	16.690		19.874		24.65
	5700	23.22	23.33	18.844	18.901	16.990	16.650		19.834		24.66
	5720	23.18	22.82	18.915	18.891	16.950	16.790		19.881		24.58
Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	16.40	16.60	18.848	18.944	17.070	16.720	N/A	19.909	30	N/A
	5785	16.17	12.13	18.897	18.889	17.110	16.730		19.934		
	5825	13.79	16.24	18.893	18.872	17.170	16.450		19.835		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	41.41	41.00	37.623	37.520	15.050	15.160	N/A	18.116	24	N/A
	5230	41.81	42.41	37.543	37.525	16.730	16.670		19.710		
U-NII Band 2A	5270	41.24	40.90	37.526	37.513	16.650	16.690		19.680		27.12
	5310	41.91	40.87	37.497	37.448	14.730	15.020		17.888		27.11
U-NII Band 2C	5510	41.04	42.02	37.552	37.445	16.890	16.730		19.821		27.13
	5550	41.53	42.38	37.489	37.610	17.090	16.810		19.963		27.18
	5670	41.16	41.05	37.450	37.498	16.970	16.650		19.823		27.13
	5710	43.56	41.94	37.560	37.572	17.120	16.830		19.988		27.23
Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	33.86	31.37	37.560	37.456	17.110	16.780	N/A	19.958	30	N/A
	5795	35.14	32.22	37.442	37.563	17.180	16.650		19.933		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	82.20	81.52	76.454	76.635	13.730	13.740	N/A	16.745	24	N/A
U-NII Band 2A	5290	82.71	81.83	76.546	76.739	13.900	14.090		17.006		30.13
U-NII Band 2C	5530	81.73	82.27	76.629	76.612	13.900	13.880		16.900		30.12
	5610	82.18	83.78	76.664	76.603	16.240	16.160		19.210		30.15
	5690	82.33	82.55	76.767	76.661	16.270	16.230		19.260		30.16
Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	75.20	73.91	76.814	76.713	16.540	16.580	N/A	19.570	30	N/A

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	162.30	162.90	155.07	155.06	11.10	10.76	0.092	14.036	24	33.10
U-NII Band 2C	5570	162.40	162.20	155.16	155.42	13.74	13.83		16.888		33.10

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/ X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	26/0	24.18	23.62	18.923	18.943	9.560	9.760	0.164	12.835	24	N/A
		52/37	24.18	23.62	18.923	18.943	13.220	13.210	0.146	16.371		
		106/53	24.18	23.62	18.923	18.943	15.860	15.660	N/A	18.771		
U-NII Band 2A	5320	26/8	22.85	23.56	18.920	18.895	9.520	9.570	0.164	12.719		24.59
		52/40	22.85	23.56	18.920	18.895	13.130	13.020	0.146	16.232		24.59
		106/54	22.85	23.56	18.920	18.895	15.620	15.610	N/A	18.625		24.59
U-NII Band 2C	5500	26/0	23.65	23.45	18.902	18.917	9.960	9.770	0.164	13.040		24.70
		52/37	23.65	23.45	18.902	18.917	13.350	13.270	0.146	16.466		24.70
		106/53	23.65	23.45	18.902	18.917	15.240	15.190	N/A	18.225		24.70
	5700	26/8	23.22	23.33	18.844	18.901	9.480	9.550	0.164	12.689		24.66
		52/40	23.22	23.33	18.844	18.901	13.140	13.090	0.146	16.271		24.66
		106/54	23.22	23.33	18.844	18.901	16.180	15.970	N/A	19.087		24.66
Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/ X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	26/0	16.40	16.60	18.848	18.944	15.820	15.550	0.164	18.861	30	N/A
		52/37	16.40	16.60	18.848	18.944	13.090	13.040	0.146	16.221		
		106/53	16.40	16.60	18.848	18.944	17.150	17.080	N/A	20.125		
	5825	26/8	13.79	16.24	18.893	18.872	15.940	15.370	0.164	18.839		
		52/40	13.79	16.24	18.893	18.872	13.370	13.000	0.146	16.345		
		106/54	13.79	16.24	18.893	18.872	17.460	16.950	N/A	20.223		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	242/61	41.41	41.00	37.623	37.520	16.160	16.170	0.164	19.339	24	N/A
U-NII Band 2A	5310	242/62	41.91	40.87	37.497	37.448	15.770	15.970		19.045		27.11
U-NII Band 2C	5510	242/61	41.04	42.02	37.552	37.445	16.830	16.910		20.044		27.13
	5670	242/62	41.16	41.05	37.450	37.498	17.350	17.360		20.529		27.13
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	242/61	33.86	31.37	37.560	37.456	17.030	16.950	0.164	20.164	30	N/A
	5795	242/62	35.14	32.22	37.442	37.563	17.580	17.220		20.578		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	484/65	82.20	81.52	76.454	76.635	14.120	14.220	0.092	17.273	24	N/A
U-NII Band 2A	5290	484/66	82.71	81.83	76.546	76.739	12.010	11.960		15.087		30.13
U-NII Band 2C	5530	484/65	81.73	82.27	76.629	76.612	15.120	15.290		18.308		30.12
	5610	484/66	82.18	83.78	76.664	76.603	17.150	17.020		20.188		30.15
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	484/65	75.20	73.91	76.814	76.713	17.140	17.090	0.092	20.217	30	N/A
		484/66	75.20	73.91	76.814	76.713	17.110	16.960		20.138		

Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	996/97	162.30	162.90	155.07	155.06	13.810	14.010	0.177	17.098	24	33.10
		996/S67	162.30	162.90	155.07	155.06	12.190	12.410		15.489		33.10
U-NII Band 2C	5570	996/97	162.40	162.20	155.16	155.42	14.060	14.160		17.298		33.10
		996/S67	162.40	162.20	155.16	155.42	17.600	17.550		20.762		33.10

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.