

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	246
A.2.3 Emissions in Non-restricted Frequency Bands:.....	255
A.3 DTS/OCCUPIED BANDWIDTH.....	256
A.3.1 DTS/Occupied Bandwidth Result.....	256
A.3.2 Measurement Plots	258
A.4 MAXIMUM PEAK OUTPUT POWER	266
A.4.1 Peak Output Power	266
A.4.2 Average Output Power (Reporting only).....	274
A.5 EMISSION LIMITATIONS	280
A.6 POWER SPECTRAL DENSITY	316
A.6.1 Power Spectral Density Result	316
A.6.2 Measurement Plots	319

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test Mode	Operating (with INPAQ Antenna)		

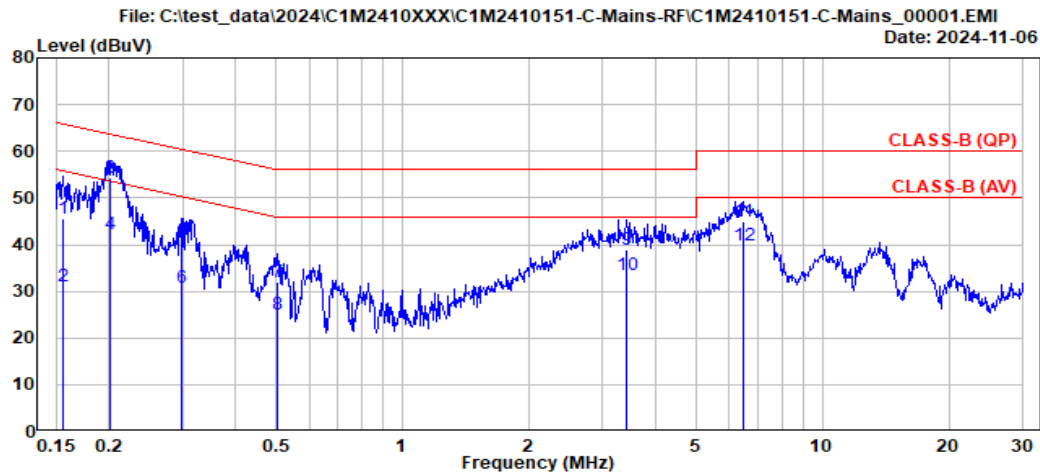

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating INPAQ		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.156	10.27	0.03	9.85	25.51	45.66	65.67	20.01	QP
2	0.156	10.27	0.03	9.85	10.90	31.05	55.67	24.62	Average
3	0.201	10.26	0.03	9.85	34.21	54.35	63.56	9.21	QP
4	0.201	10.26	0.03	9.85	22.08	42.22	53.56	11.34	Average
5	0.298	10.26	0.03	9.85	20.22	40.36	60.29	19.93	QP
6	0.298	10.26	0.03	9.85	10.79	30.93	50.29	19.36	Average
7	0.504	10.26	0.03	9.85	11.80	31.94	56.00	24.06	QP
8	0.504	10.26	0.03	9.85	4.86	25.00	46.00	21.00	Average
9	3.415	10.33	0.08	9.86	18.57	38.84	56.00	17.16	QP
10	3.415	10.33	0.08	9.86	13.21	33.48	46.00	12.52	Average
11	6.463	10.46	0.11	9.87	24.45	44.89	60.00	15.11	QP
12	6.463	10.46	0.11	9.87	19.53	39.97	50.00	10.03	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test Mode	Operating (with INPAQ Antenna)		

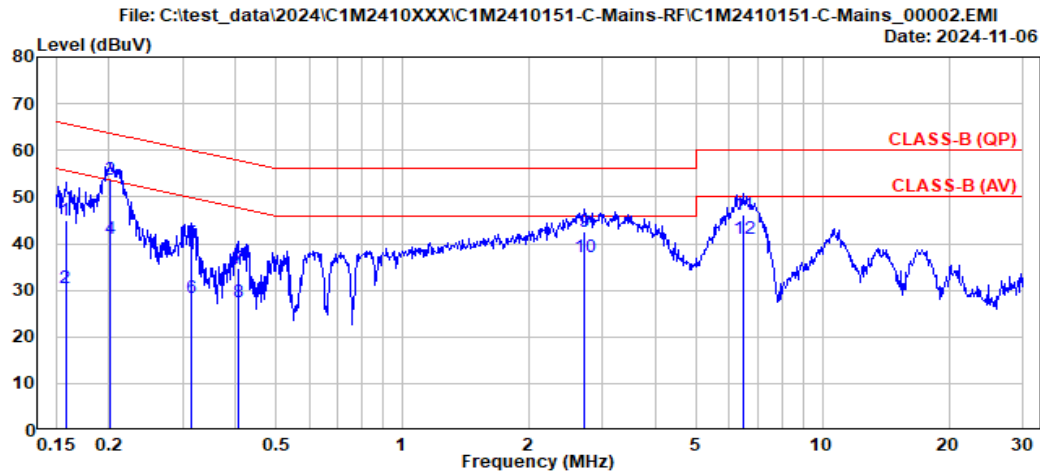

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating INPAQ		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.158	10.26	0.03	9.85	24.94	45.08	65.59	20.51	QP
2	0.158	10.26	0.03	9.85	10.30	30.44	55.59	25.15	Average
3	0.202	10.25	0.03	9.85	33.57	53.70	63.52	9.82	QP
4	0.202	10.25	0.03	9.85	21.07	41.20	53.52	12.32	Average
5	0.315	10.25	0.03	9.85	19.91	40.04	59.83	19.79	QP
6	0.315	10.25	0.03	9.85	8.30	28.43	49.83	21.40	Average
7	0.406	10.25	0.03	9.85	14.68	34.81	57.72	22.91	QP
8	0.406	10.25	0.03	9.85	7.21	27.34	47.72	20.38	Average
9	2.715	10.29	0.07	9.86	22.21	42.43	56.00	13.57	QP
10	2.715	10.29	0.07	9.86	16.95	37.17	46.00	8.83	Average
11	6.463	10.38	0.11	9.87	25.78	46.14	60.00	13.86	QP
12	6.463	10.38	0.11	9.87	20.84	41.20	50.00	8.80	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test Mode	Operating (with LUXSHARE Antenna)		

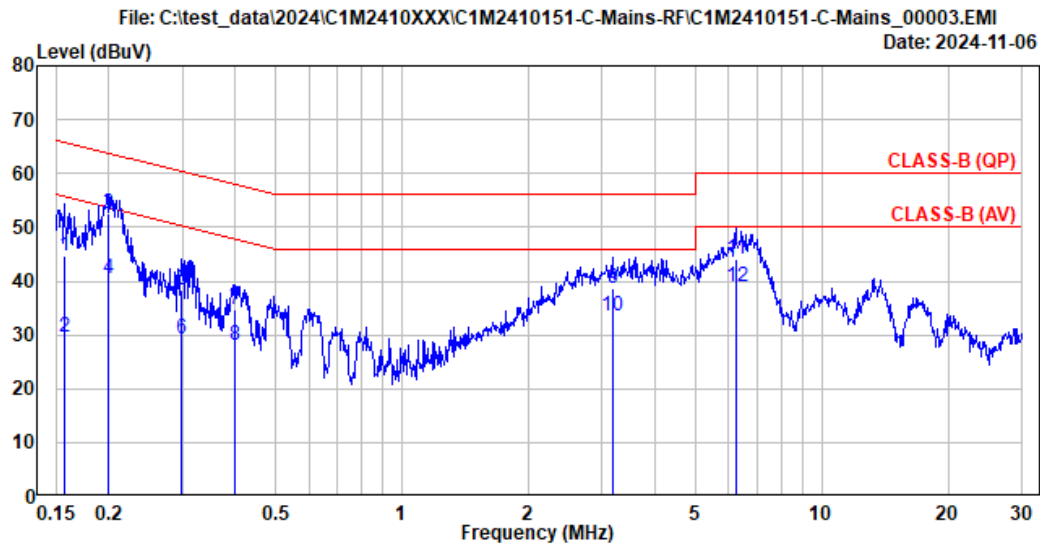

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.157	10.27	0.03	9.85	24.60	44.75	65.63	20.88	QP
2	0.157	10.27	0.03	9.85	9.53	29.68	55.63	25.95	Average
3	0.200	10.26	0.03	9.85	32.32	52.46	63.60	11.14	QP
4	0.200	10.26	0.03	9.85	20.29	40.43	53.60	13.17	Average
5	0.297	10.26	0.03	9.85	18.22	38.36	60.33	21.97	QP
6	0.297	10.26	0.03	9.85	9.24	29.38	50.33	20.95	Average
7	0.400	10.26	0.03	9.85	14.53	34.67	57.84	23.17	QP
8	0.400	10.26	0.03	9.85	8.02	28.16	47.84	19.68	Average
9	3.169	10.32	0.07	9.86	18.26	38.51	56.00	17.49	QP
10	3.169	10.32	0.07	9.86	13.22	33.47	46.00	12.53	Average
11	6.241	10.45	0.10	9.87	23.57	43.99	60.00	16.01	QP
12	6.241	10.45	0.10	9.87	18.44	38.86	50.00	11.14	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test Mode	Operating (with LUXSHARE-ICT Antenna)		

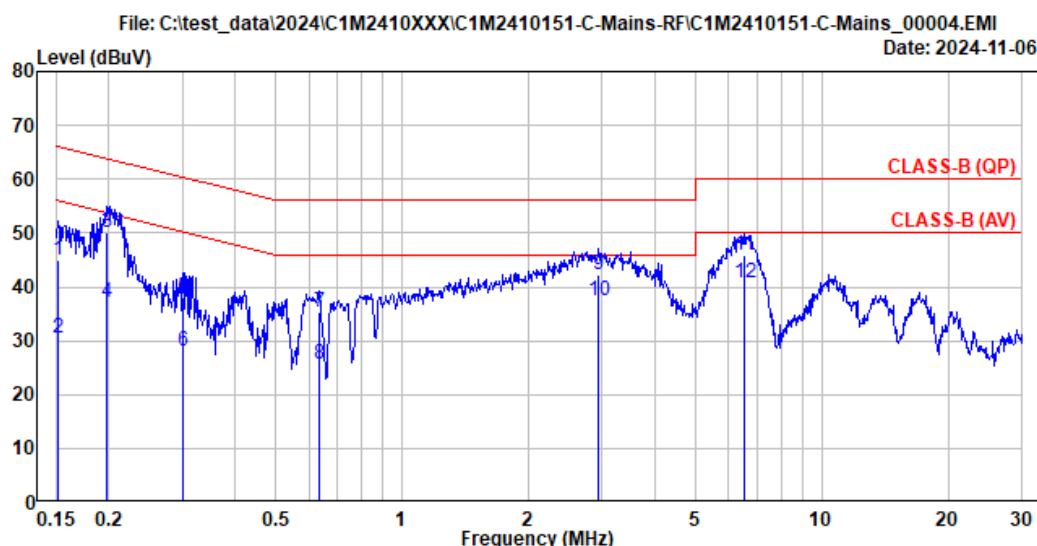

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.26	0.03	9.85	24.89	45.03	65.92	20.89	QP
2	0.152	10.26	0.03	9.85	10.44	30.58	55.92	25.34	Average
3	0.197	10.25	0.03	9.85	30.07	50.20	63.72	13.52	QP
4	0.197	10.25	0.03	9.85	16.99	37.12	53.72	16.60	Average
5	0.301	10.25	0.03	9.85	17.78	37.91	60.20	22.29	QP
6	0.301	10.25	0.03	9.85	8.08	28.21	50.20	21.99	Average
7	0.633	10.26	0.04	9.85	15.20	35.35	56.00	20.65	QP
8	0.633	10.26	0.04	9.85	5.45	25.60	46.00	20.40	Average
9	2.940	10.29	0.07	9.86	21.99	42.21	56.00	13.79	QP
10	2.940	10.29	0.07	9.86	17.19	37.41	46.00	8.59	Average
11	6.527	10.38	0.11	9.87	25.45	45.81	60.00	14.19	QP
12	6.527	10.38	0.11	9.87	20.51	40.87	50.00	9.13	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/10/23 ~ 11/15	Temp./Hum.	23 ~ 24°C/51 ~ 58%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	(1) Harry Huang (2) Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

● With INPAQ Antenna

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.500	22.91	1.40	26.50	31.28	29.09	40.00	10.91	Peak
79.500	12.60	2.27	26.38	41.13	29.62	40.00	10.38	Peak
155.500	15.91	3.12	26.01	39.36	32.38	43.50	11.12	Peak
251.500	17.88	4.05	25.73	37.35	33.55	46.00	12.45	Peak
345.500	19.84	5.13	26.08	35.72	34.62	46.00	11.38	Peak
708.000	24.56	7.35	27.48	32.67	37.11	46.00	8.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.50	39.99	36.97	40.00	3.03	Peak
86.500	14.05	2.34	26.36	47.88	37.91	40.00	2.09	Peak
156.000	15.87	3.12	26.01	43.50	36.48	43.50	7.02	Peak
345.500	19.84	5.13	26.08	36.20	35.10	46.00	10.90	Peak
480.000	22.51	6.48	27.09	31.59	33.49	46.00	12.51	Peak
742.500	24.75	7.53	27.42	31.30	36.15	46.00	9.85	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.50	32.84	29.82	40.00	10.18	Peak
78.500	12.51	2.26	26.38	41.03	29.41	40.00	10.59	Peak
155.000	15.95	3.11	26.01	37.80	30.85	43.50	12.65	Peak
249.500	17.83	4.03	25.73	37.74	33.86	46.00	12.14	Peak
708.500	24.56	7.35	27.48	32.91	37.36	46.00	8.64	Peak
773.000	24.89	7.67	27.37	32.21	37.41	46.00	8.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.50	38.83	35.82	40.00	4.18	Peak
86.000	13.92	2.34	26.36	48.21	38.11	40.00	1.89	Peak
157.000	15.79	3.13	26.00	43.01	35.93	43.50	7.57	Peak
345.500	19.84	5.13	26.08	36.61	35.50	46.00	10.50	Peak
455.000	22.08	6.28	26.93	33.22	34.66	46.00	11.34	Peak
755.500	24.81	7.59	27.40	29.76	34.77	46.00	11.23	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **With LUXSHARE-ICT Antenna**

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.45	26.49	31.74	30.07	40.00	9.93	Peak
150.500	16.26	3.20	26.00	39.58	33.04	43.50	10.46	Peak
244.000	17.53	4.20	25.70	33.30	29.33	46.00	16.67	Peak
298.500	18.59	4.68	25.61	33.47	31.13	46.00	14.87	Peak
388.500	20.84	5.80	26.36	33.72	34.01	46.00	11.99	Peak
523.500	23.14	6.85	27.20	32.72	35.51	46.00	10.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.52	26.48	39.47	36.56	40.00	3.44	Peak
58.000	12.25	1.97	26.42	38.98	26.77	40.00	13.23	Peak
153.500	16.04	3.23	25.98	35.80	29.09	43.50	14.41	Peak
354.500	20.06	5.41	26.09	31.12	30.49	46.00	15.51	Peak
428.000	21.62	6.18	26.65	34.81	35.97	46.00	10.03	Peak
545.500	23.42	6.92	27.26	32.29	35.38	46.00	10.62	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.52	26.48	33.60	30.69	40.00	9.31	Peak
150.500	16.26	3.20	26.00	39.63	33.09	43.50	10.41	Peak
304.500	18.72	4.75	25.65	34.48	32.30	46.00	13.70	Peak
436.500	21.78	6.25	26.71	32.52	33.85	46.00	12.15	Peak
520.500	23.11	6.83	27.19	32.08	34.83	46.00	11.17	Peak
624.000	24.18	7.23	27.41	31.69	35.70	46.00	10.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.52	26.48	39.43	36.52	40.00	3.48	Peak
155.000	15.95	3.25	25.97	36.36	29.59	43.50	13.91	Peak
278.000	18.29	4.51	25.64	31.99	29.15	46.00	16.85	Peak
388.500	20.84	5.80	26.36	33.86	34.15	46.00	11.85	Peak
507.500	22.92	6.79	27.15	32.48	35.03	46.00	10.97	Peak
571.000	23.73	7.01	27.33	31.80	35.21	46.00	10.79	Peak

File Number: C1M2410151

Report Number: EM-F240550

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

● With INPAQ Antenna


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

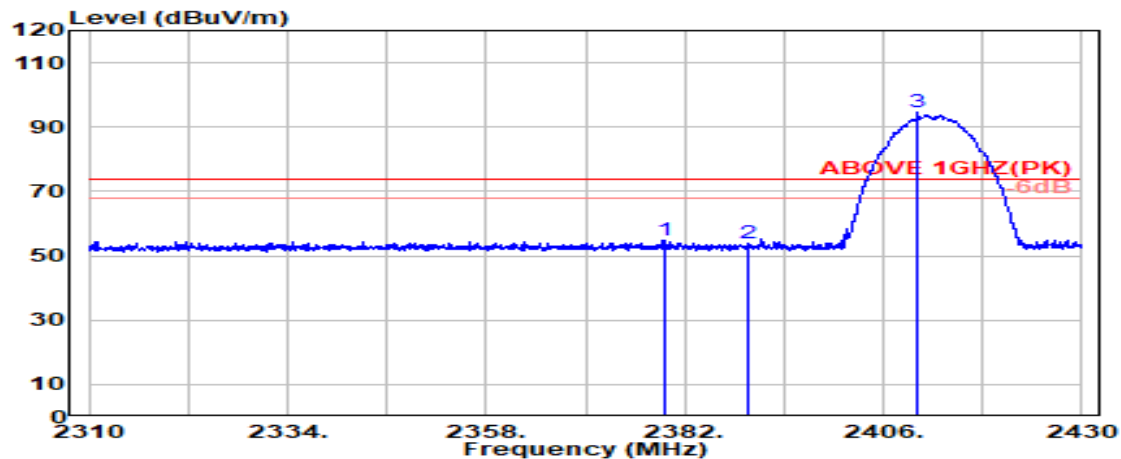

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.450	28.18	5.71	39.88	60.97	54.98	74.00	19.02	Peak
2389.800	28.14	5.72	39.88	59.77	53.75	74.00	20.25	Peak
@ 2410.050	28.14	5.74	39.88	100.57	94.58	---	---	Peak

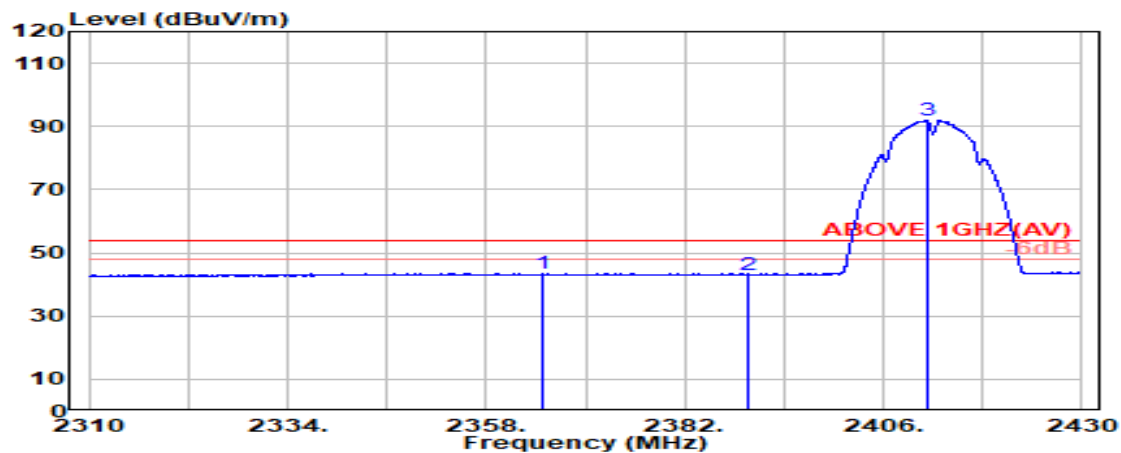

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2364.800	28.24	5.69	39.88	49.43	43.48	54.00	10.52	Average
2389.800	28.14	5.72	39.88	49.10	43.08	54.00	10.92	Average
@ 2411.250	28.15	5.75	39.88	97.93	91.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

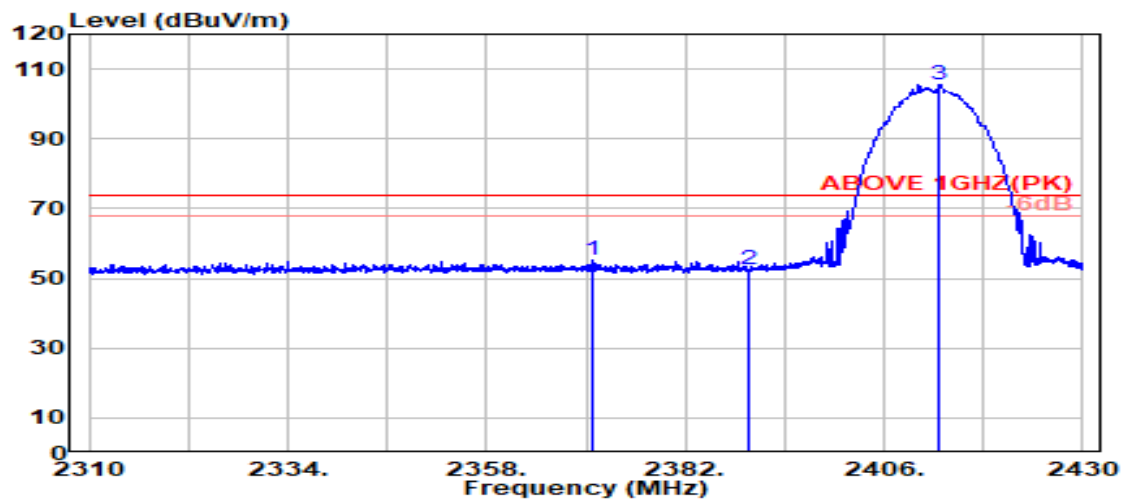

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.650	28.22	5.70	39.88	61.08	55.12	74.00	18.88	Peak
2389.800	28.14	5.72	39.88	58.52	52.50	74.00	21.50	Peak
@ 2412.750	28.15	5.75	39.88	111.70	105.72	---	---	Peak

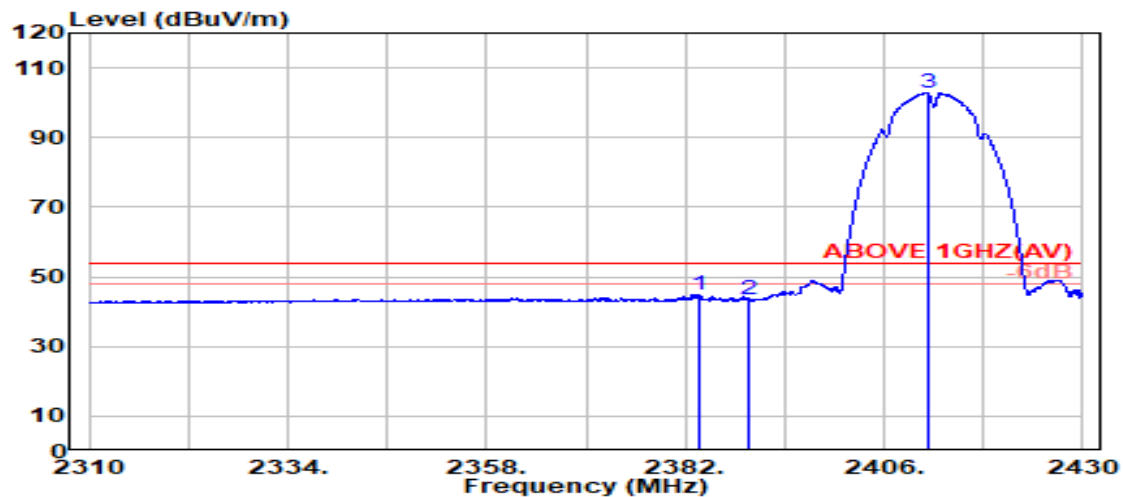

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.600	28.17	5.71	39.88	50.75	44.75	54.00	9.25	Average
2389.800	28.14	5.72	39.88	49.45	43.43	54.00	10.57	Average
@ 2411.250	28.15	5.75	39.88	108.86	102.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

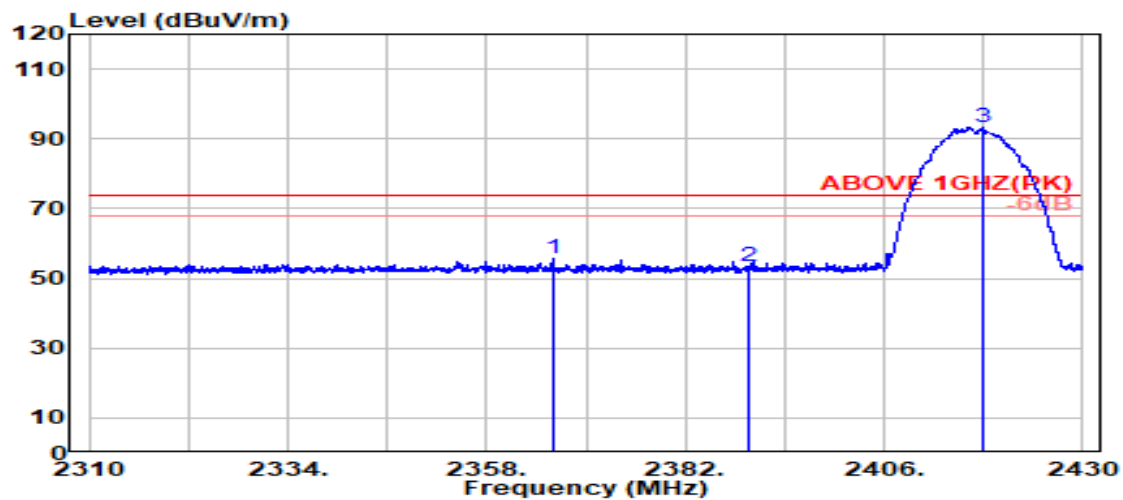

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2365.950	28.24	5.69	39.88	61.62	55.66	74.00	18.34	Peak
2389.800	28.14	5.72	39.88	59.50	53.49	74.00	20.51	Peak
@ 2417.800	28.17	5.75	39.88	99.44	93.49	---	---	Peak

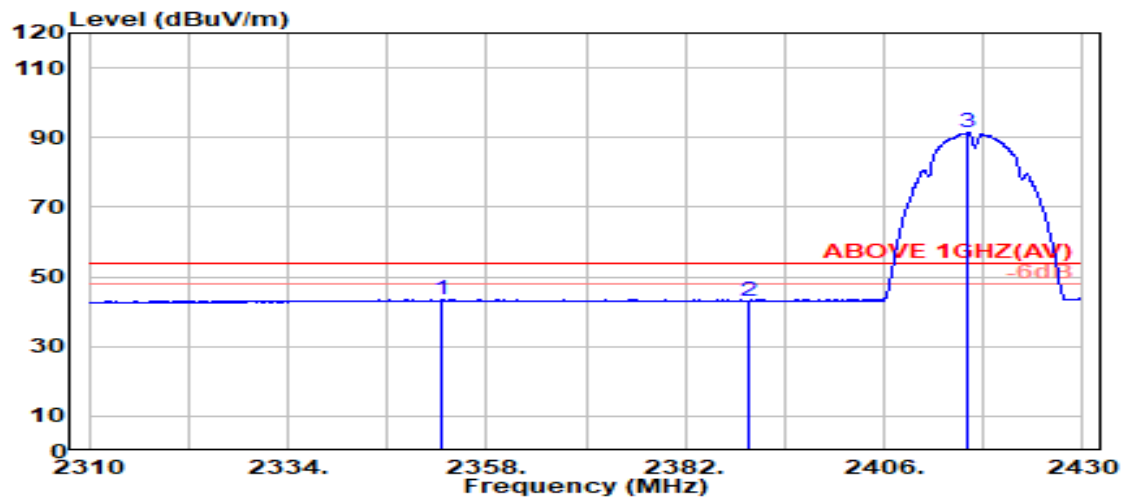

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2352.550	28.29	5.68	39.88	49.37	43.46	54.00	10.54	Average
2389.800	28.14	5.72	39.88	49.24	43.22	54.00	10.78	Average
@ 2416.200	28.17	5.75	39.88	97.37	91.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

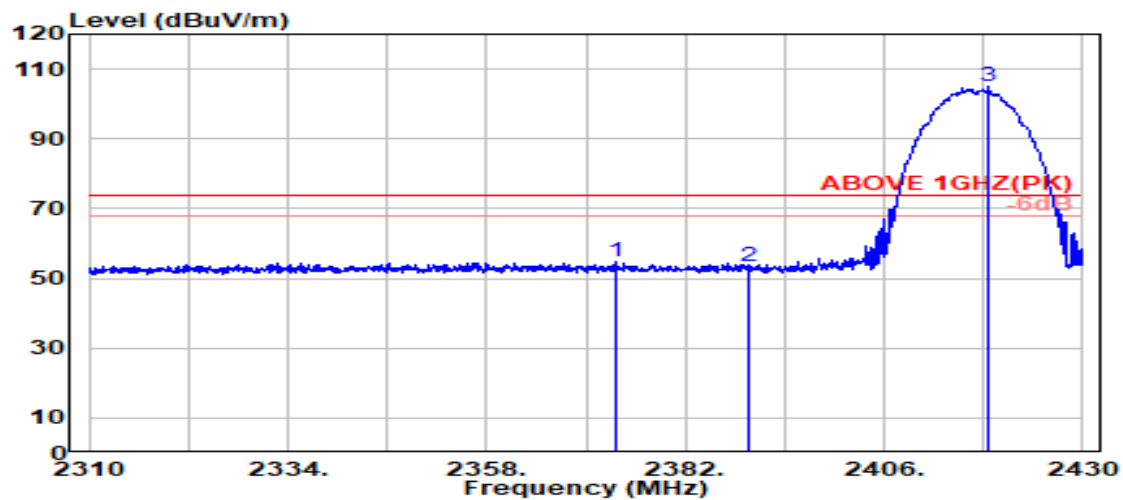

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.650	28.20	5.70	39.88	60.62	54.65	74.00	19.35	Peak
2389.800	28.14	5.72	39.88	59.34	53.32	74.00	20.68	Peak
@ 2418.650	28.18	5.76	39.88	110.92	104.98	---	---	Peak

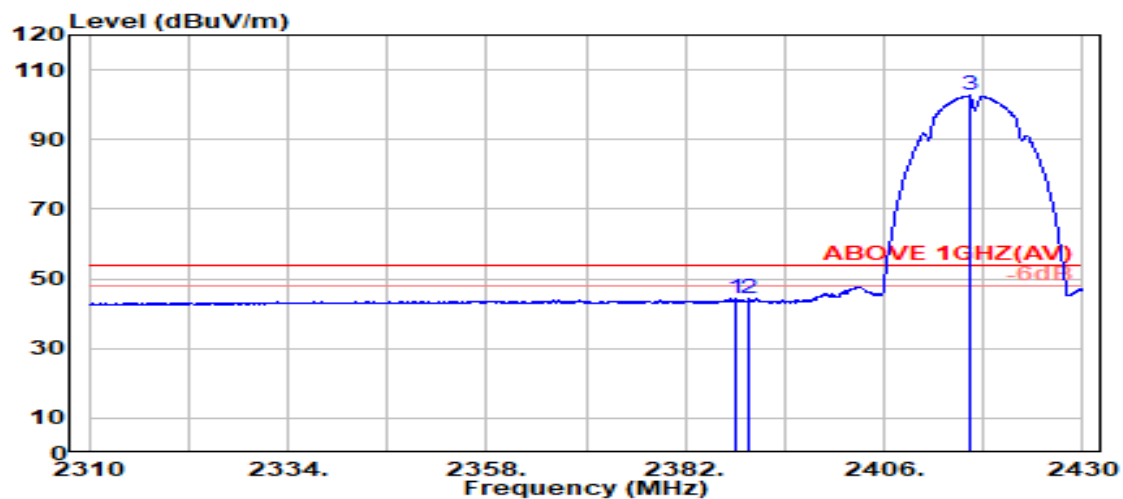

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	28.15	5.72	39.88	50.20	44.18	54.00	9.82	Average
2389.800	28.14	5.72	39.88	50.19	44.17	54.00	9.83	Average
@ 2416.250	28.17	5.75	39.88	108.55	102.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

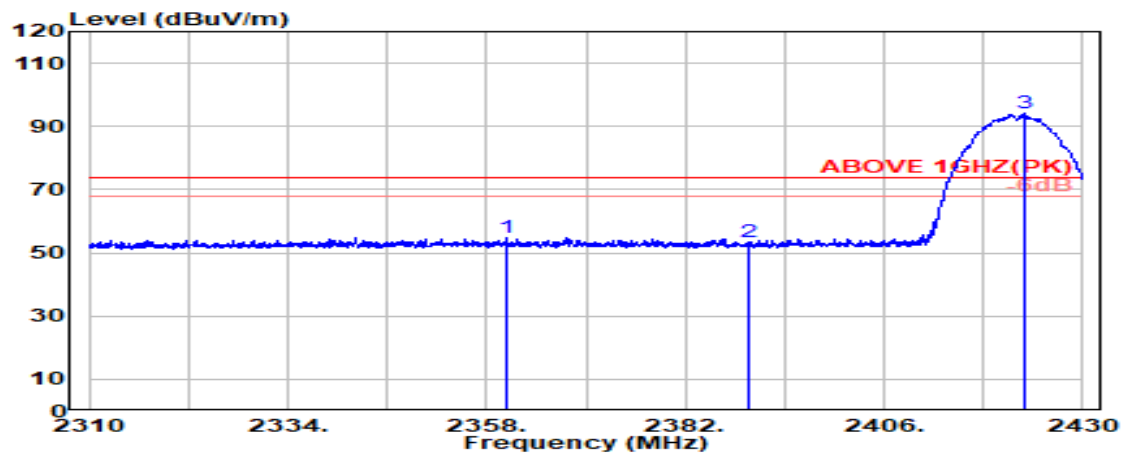

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2360.350	28.26	5.69	39.88	60.86	54.93	74.00	19.07	Peak
2389.800	28.14	5.72	39.88	59.23	53.21	74.00	20.79	Peak
@ 2422.850	28.19	5.76	39.88	99.91	93.98	---	---	Peak

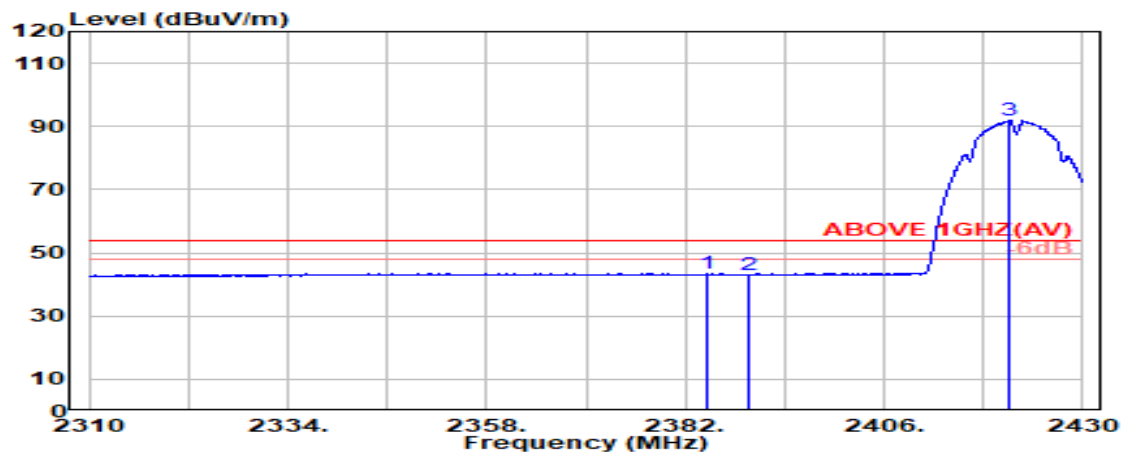

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.500	28.16	5.71	39.88	49.49	43.49	54.00	10.51	Average
2389.800	28.14	5.72	39.88	49.22	43.20	54.00	10.80	Average
@ 2421.200	28.19	5.76	39.88	97.66	91.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

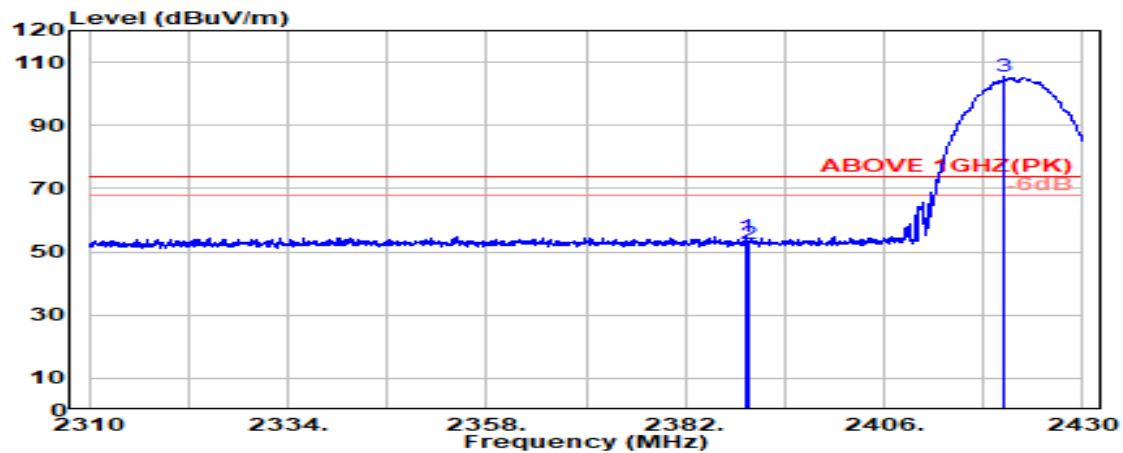

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	60.95	54.94	74.00	19.06	Peak
2389.800	28.14	5.72	39.88	58.44	52.42	74.00	21.58	Peak
@ 2420.550	28.18	5.76	39.88	111.32	105.38	---	---	Peak

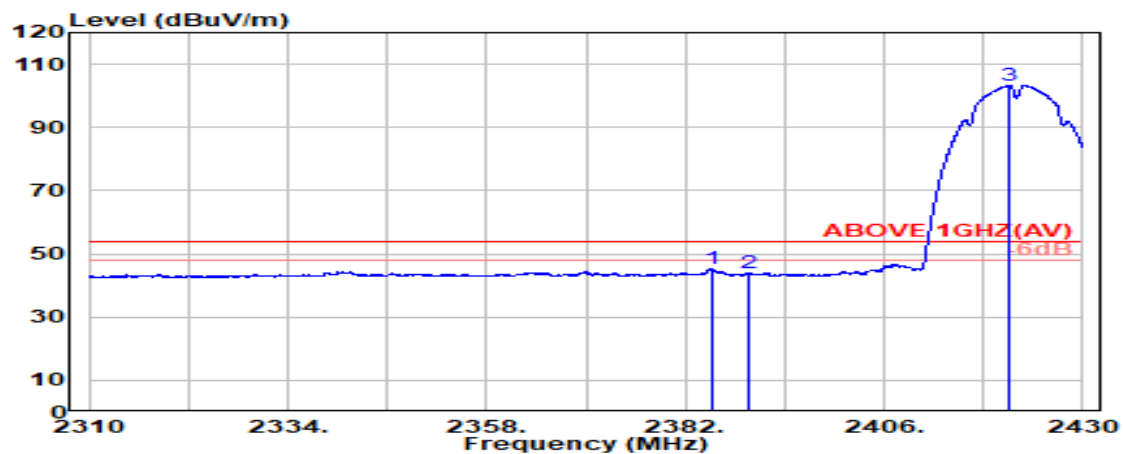

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.200	28.16	5.72	39.88	51.43	45.42	54.00	8.58	Average
2389.800	28.14	5.72	39.88	49.81	43.79	54.00	10.21	Average
@ 2421.150	28.19	5.76	39.88	109.28	103.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

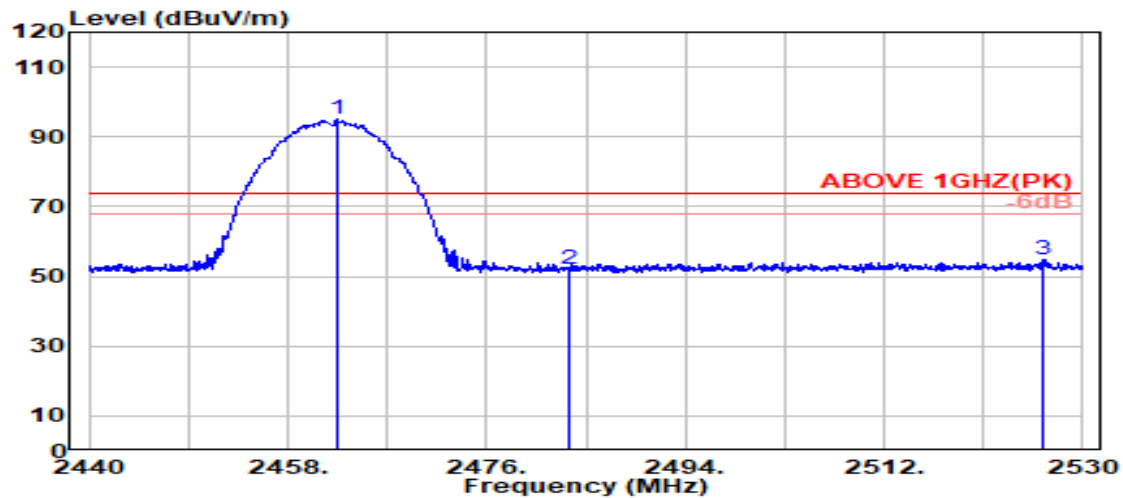

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.400	28.32	5.81	39.87	100.79	95.05	---	---	Peak
	2483.500	28.37	5.83	39.87	57.56	51.88	74.00	22.12	Peak
	2526.300	28.56	5.88	39.88	60.45	55.01	74.00	18.99	Peak

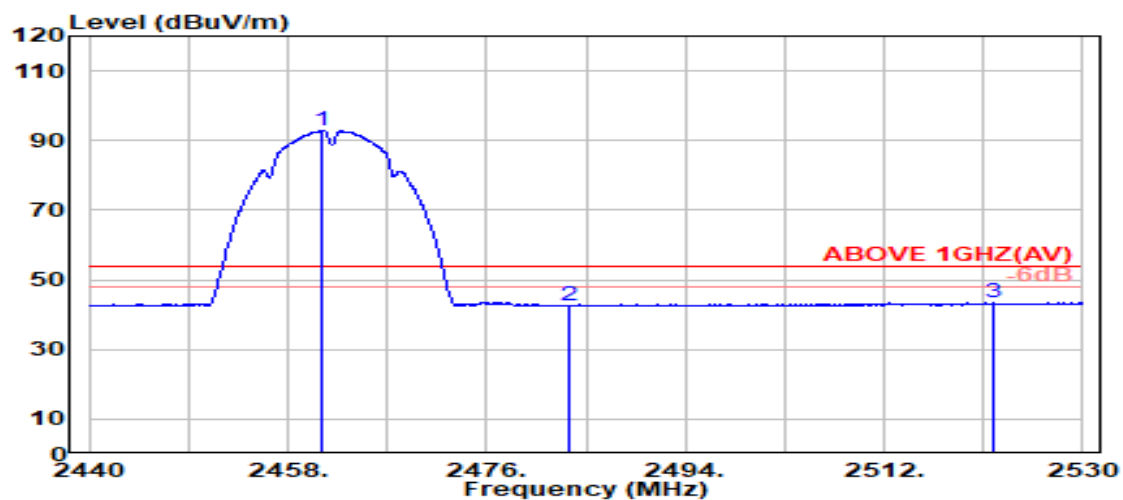


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.150	28.32	5.81	39.87	98.59	92.85	---	---	Average
	2483.500	28.37	5.83	39.87	48.32	42.65	54.00	11.35	Average
	2521.950	28.53	5.88	39.88	48.84	43.37	54.00	10.63	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

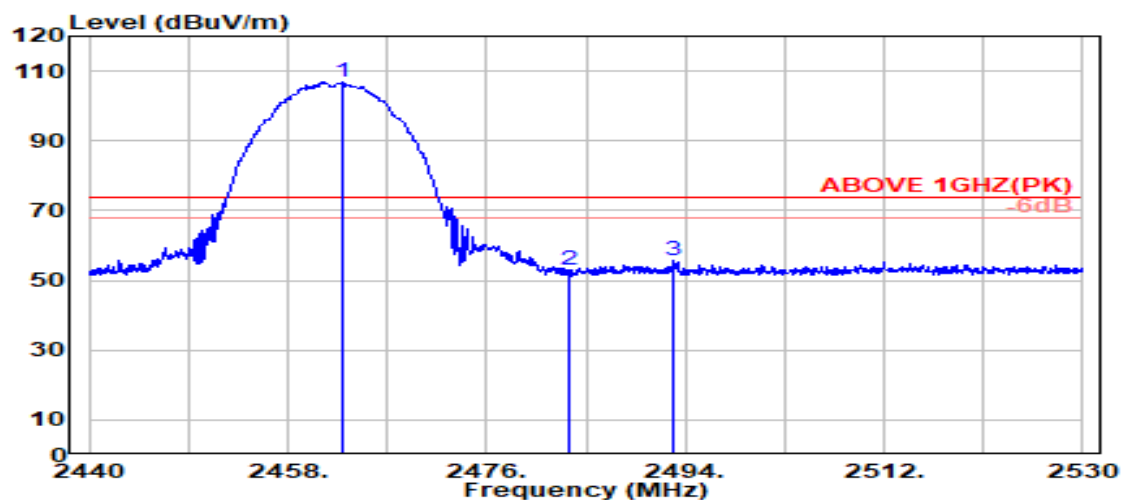

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.950	28.33	5.81	39.87	112.54	106.81	---	---	Peak
2483.500	28.37	5.83	39.87	58.49	52.81	74.00	21.19	Peak
2492.900	28.39	5.84	39.87	61.15	55.51	74.00	18.49	Peak

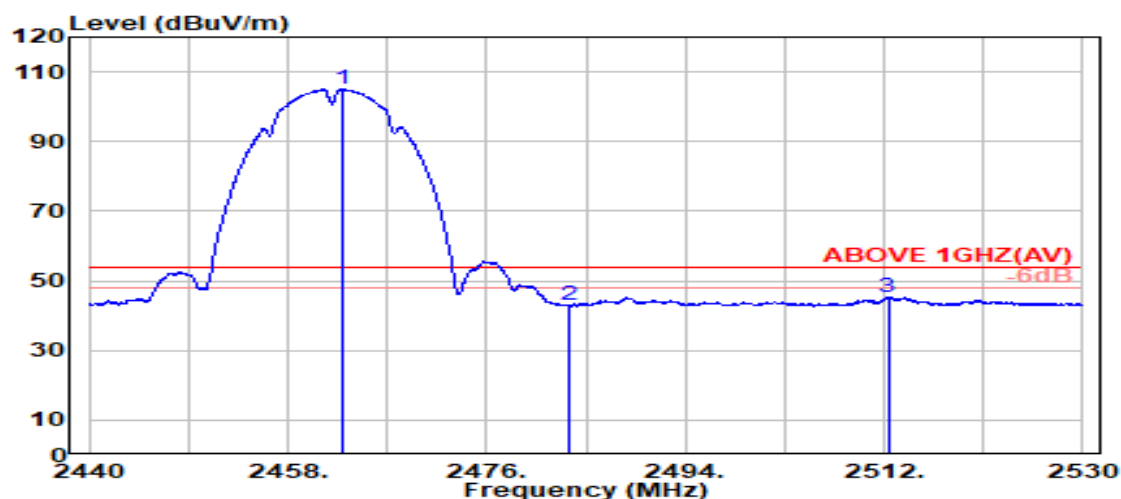

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.850	28.33	5.81	39.87	110.87	105.13	---	---	Average
2483.500	28.37	5.83	39.87	48.81	43.13	54.00	10.87	Average
2512.350	28.47	5.87	39.87	50.90	45.37	54.00	8.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

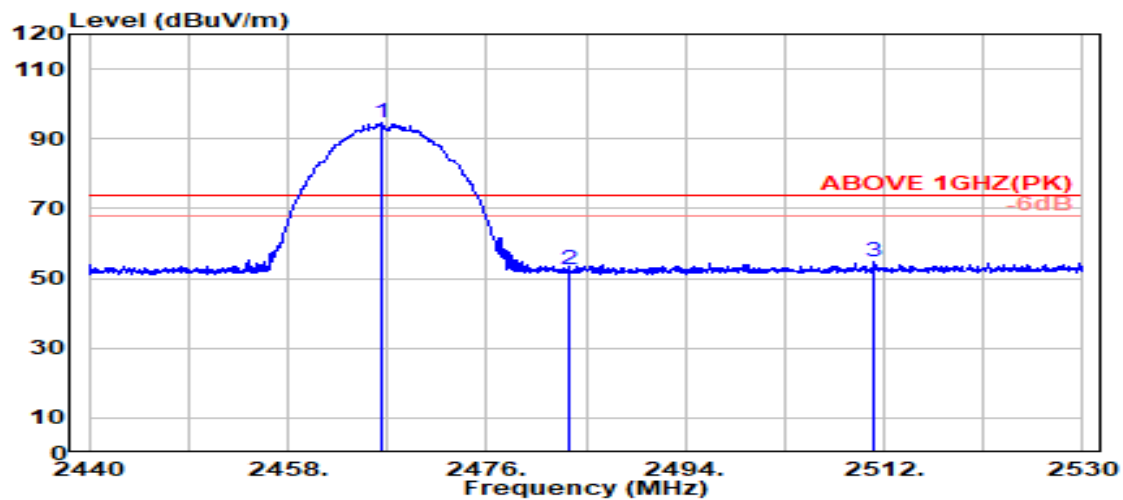

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.450	28.33	5.81	39.87	100.28	94.55	---	---	Peak
2483.500	28.37	5.83	39.87	58.37	52.70	74.00	21.30	Peak
2511.150	28.47	5.86	39.87	60.36	54.81	74.00	19.19	Peak

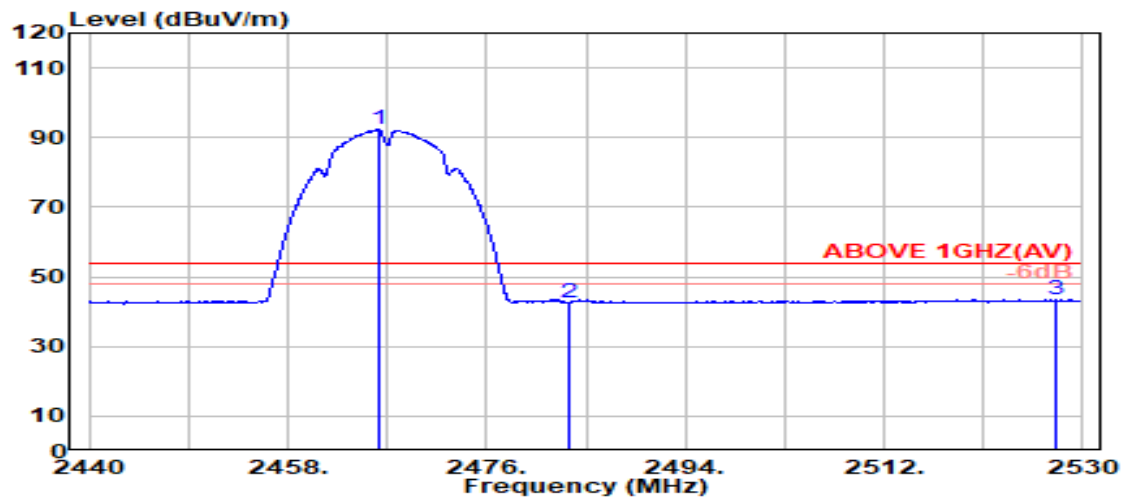

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.200	28.33	5.81	39.87	97.98	92.26	---	---	Average
2483.500	28.37	5.83	39.87	48.21	42.53	54.00	11.47	Average
2527.600	28.57	5.88	39.88	48.99	43.56	54.00	10.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

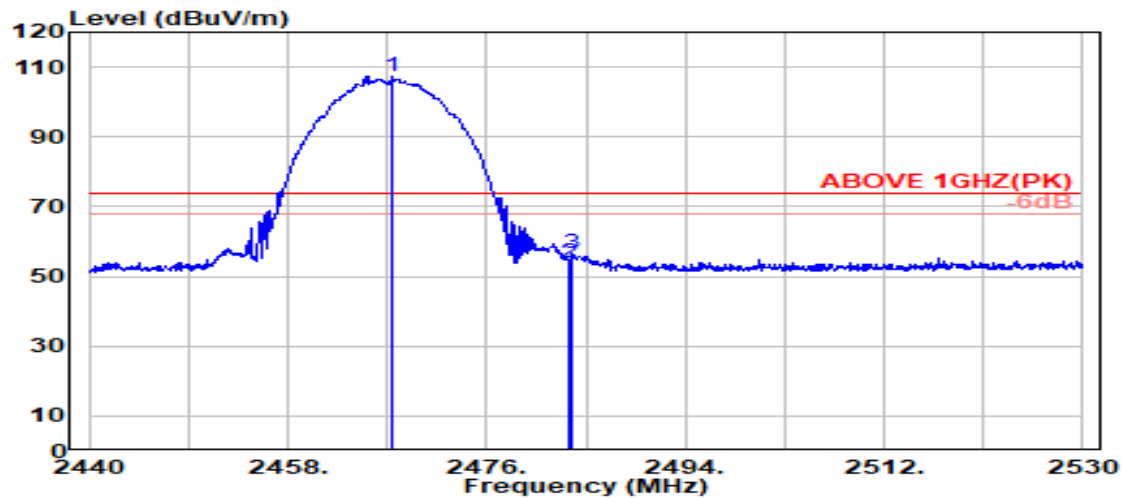

11

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.550	28.34	5.81	39.87	113.02	107.29	---	---	Peak
2483.500	28.37	5.83	39.87	59.40	53.73	74.00	20.27	Peak
2483.750	28.37	5.83	39.87	62.35	56.68	74.00	17.32	Peak

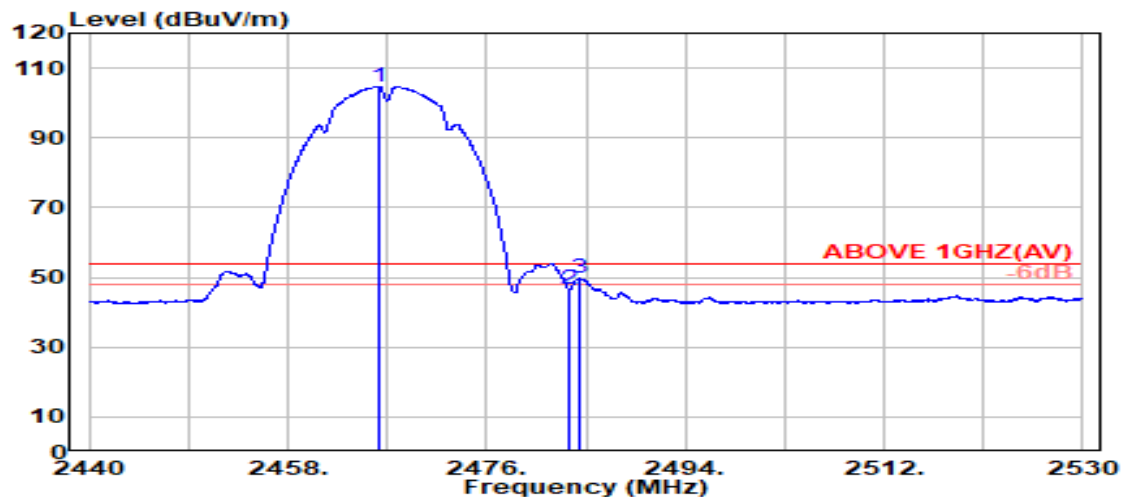

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.33	5.81	39.87	110.49	104.76	---	---	Average
2483.500	28.37	5.83	39.87	52.20	46.53	54.00	7.47	Average
2484.400	28.37	5.83	39.87	55.32	49.65	54.00	4.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

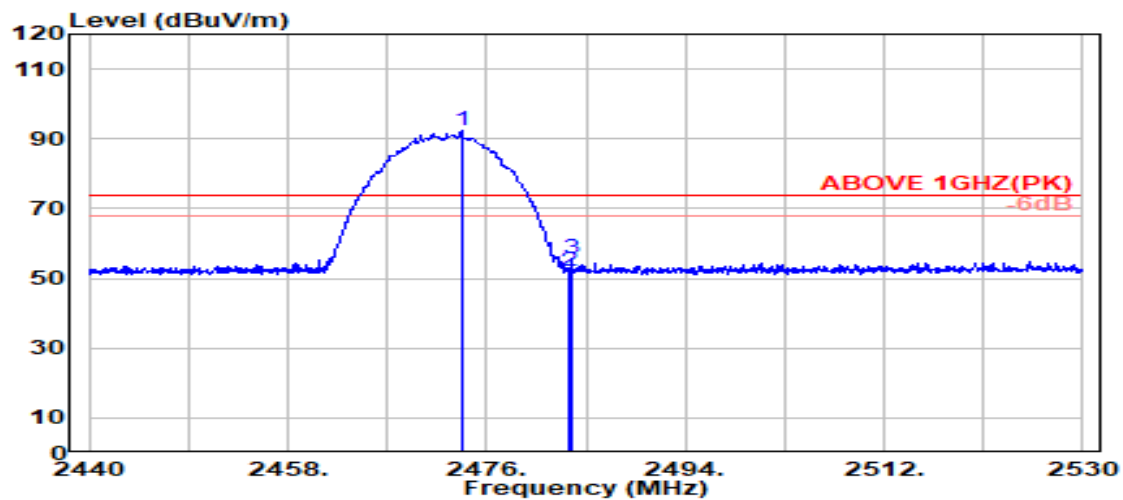

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.700	28.35	5.82	39.87	98.15	92.44	---	---	Peak
2483.500	28.37	5.83	39.87	57.63	51.96	74.00	22.04	Peak
2483.650	28.37	5.83	39.87	61.52	55.84	74.00	18.16	Peak

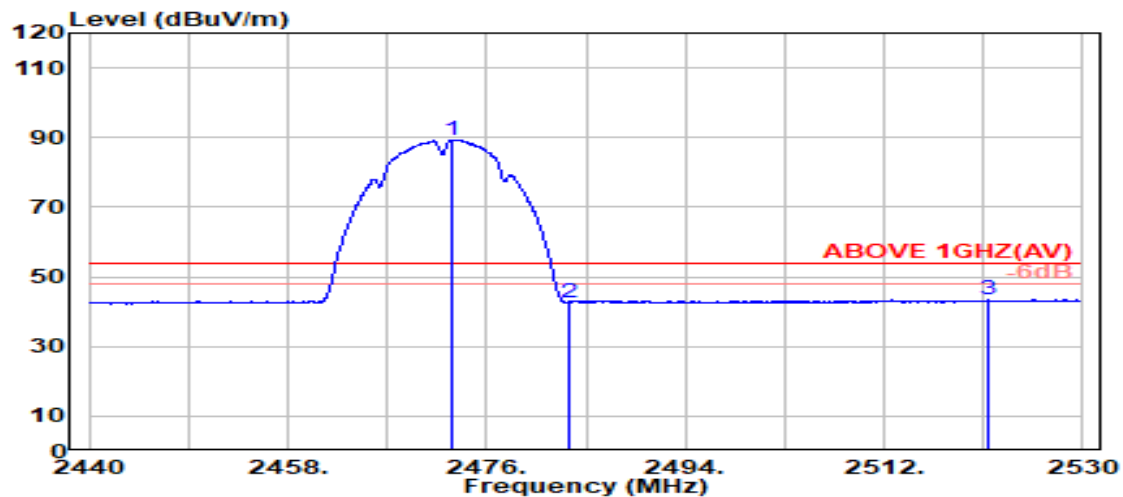

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.35	5.82	39.87	95.14	89.43	---	---	Average
2483.500	28.37	5.83	39.87	48.21	42.54	54.00	11.46	Average
2521.400	28.53	5.88	39.88	48.93	43.46	54.00	10.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

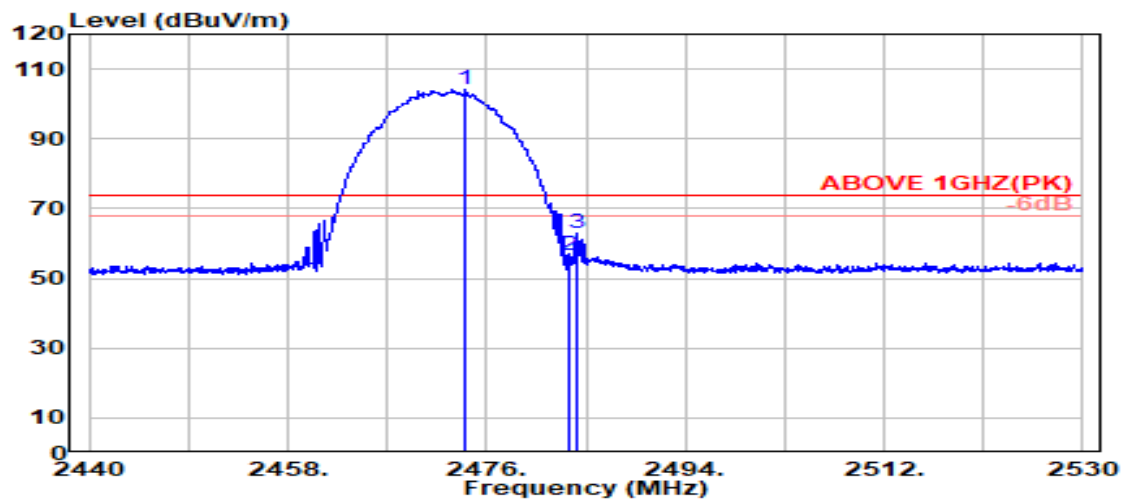

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.150	28.35	5.82	39.87	109.82	104.12	---	---	Peak
2483.500	28.37	5.83	39.87	62.47	56.79	74.00	17.21	Peak
2484.100	28.37	5.83	39.87	68.42	62.75	74.00	11.25	Peak

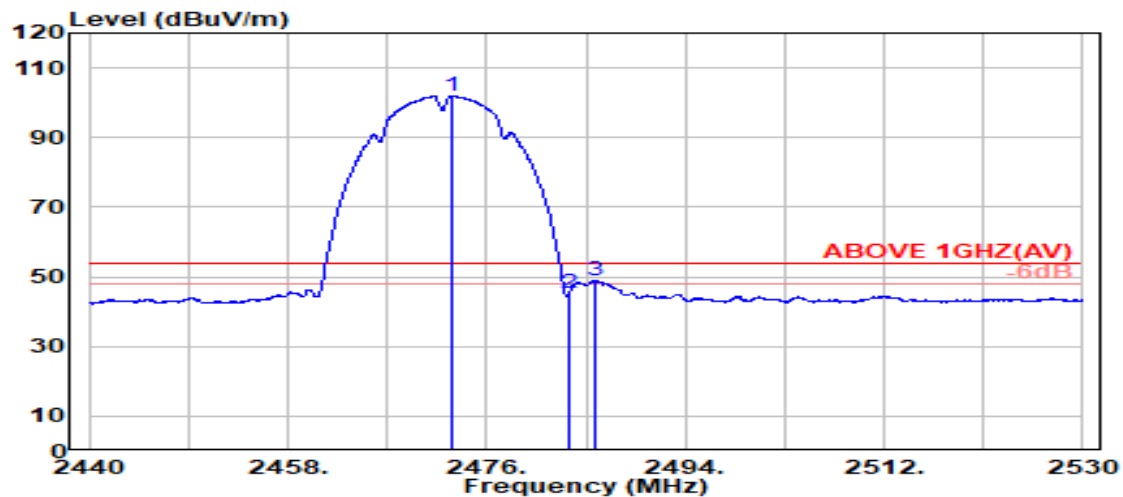

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.35	5.82	39.87	107.66	101.96	---	---	Average
2483.500	28.37	5.83	39.87	50.87	45.20	54.00	8.80	Average
2485.800	28.37	5.83	39.87	54.65	48.98	54.00	5.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

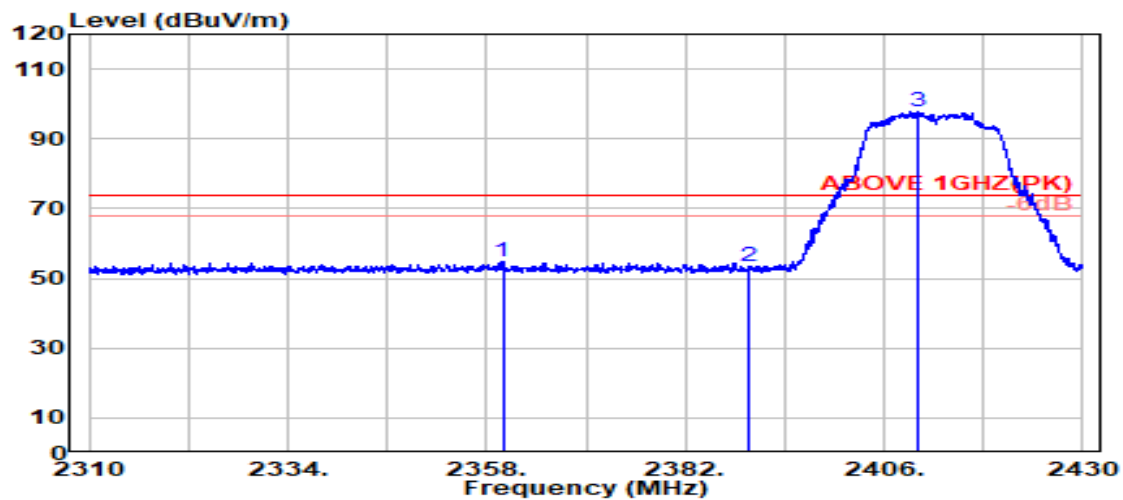

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2359.950	28.26	5.68	39.88	60.68	54.75	74.00	19.25	Peak
2389.800	28.14	5.72	39.88	59.40	53.38	74.00	20.62	Peak
@ 2410.150	28.14	5.75	39.88	103.87	97.88	---	---	Peak

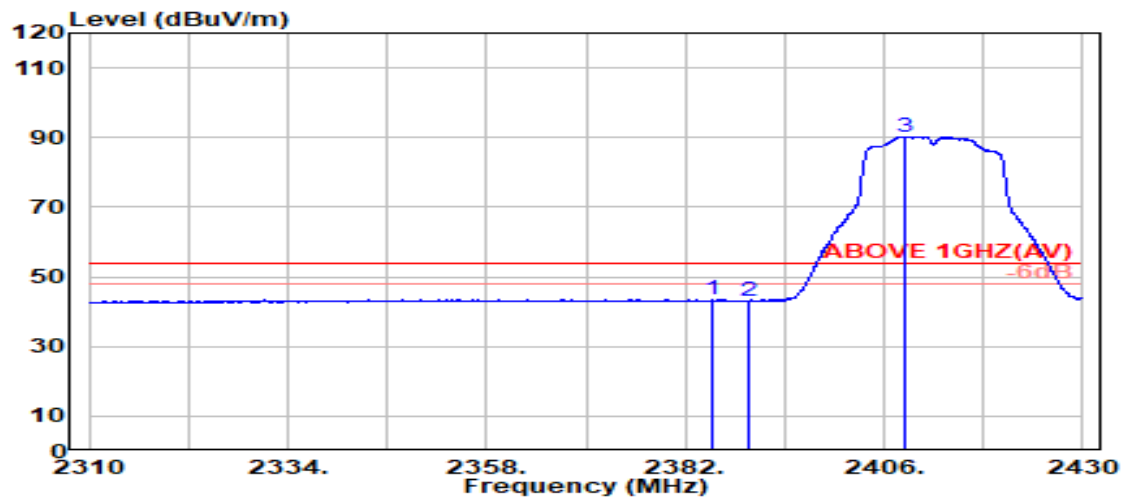

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.150	28.16	5.72	39.88	49.46	43.45	54.00	10.55	Average
2389.800	28.14	5.72	39.88	49.18	43.16	54.00	10.84	Average
@ 2408.600	28.13	5.74	39.88	96.25	90.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

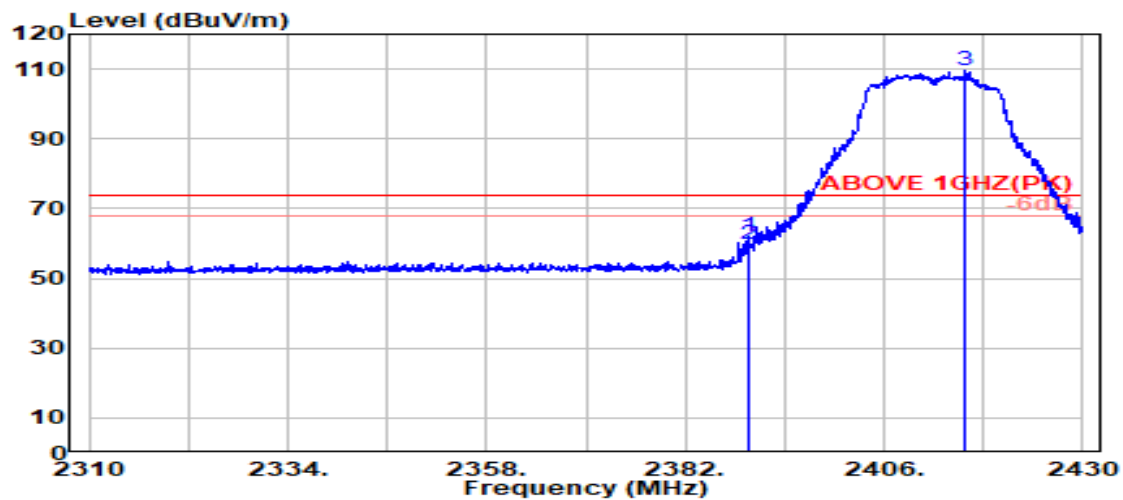

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	67.84	61.82	74.00	12.18	Peak
2389.800	28.14	5.72	39.88	65.97	59.96	74.00	14.04	Peak
@ 2415.800	28.16	5.75	39.88	115.45	109.49	---	---	Peak

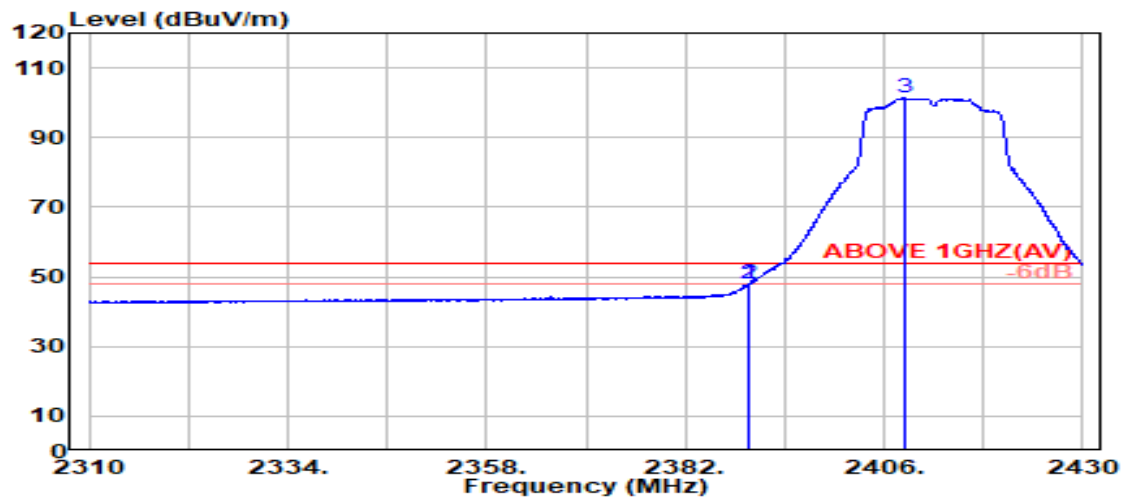

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	54.10	48.08	54.00	5.92	Average
2389.800	28.14	5.72	39.88	53.90	47.89	54.00	6.11	Average
@ 2408.550	28.13	5.74	39.88	107.21	101.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

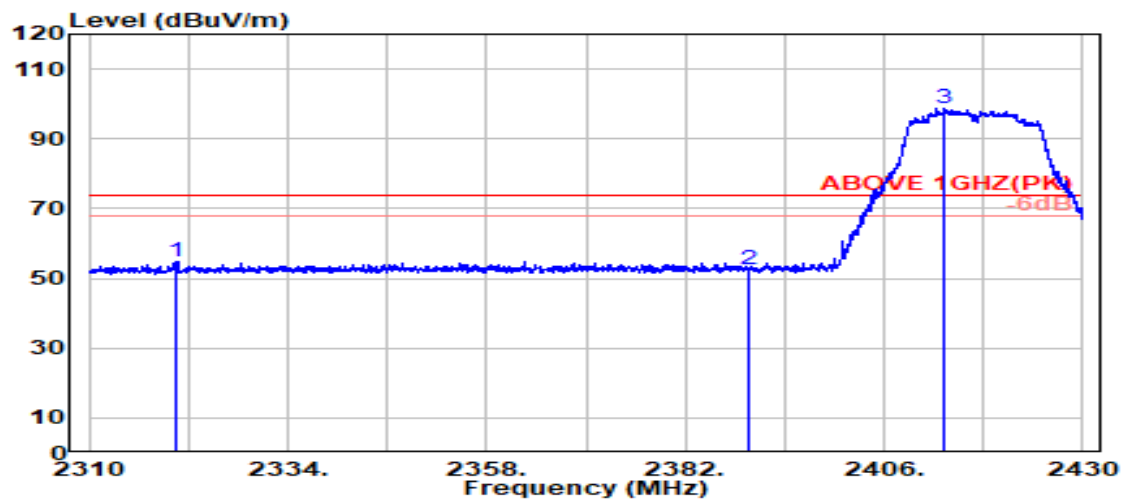

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2320.600	28.12	5.64	39.88	60.75	54.63	74.00	19.37	Peak
2389.800	28.14	5.72	39.88	58.68	52.67	74.00	21.33	Peak
@ 2413.250	28.15	5.75	39.88	104.85	98.88	---	---	Peak

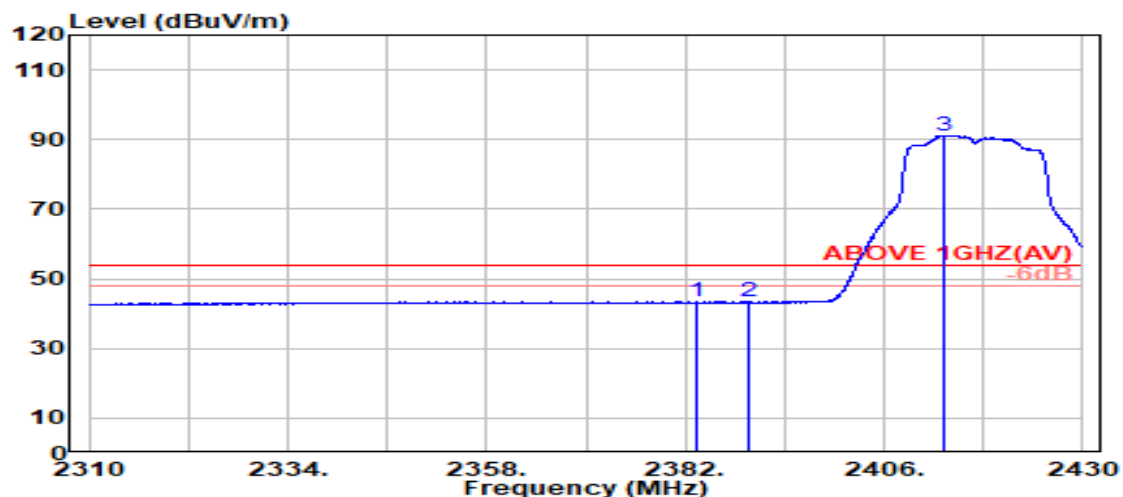

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.300	28.17	5.71	39.88	49.49	43.49	54.00	10.51	Average
2389.800	28.14	5.72	39.88	49.39	43.38	54.00	10.62	Average
@ 2413.200	28.15	5.75	39.88	97.16	91.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

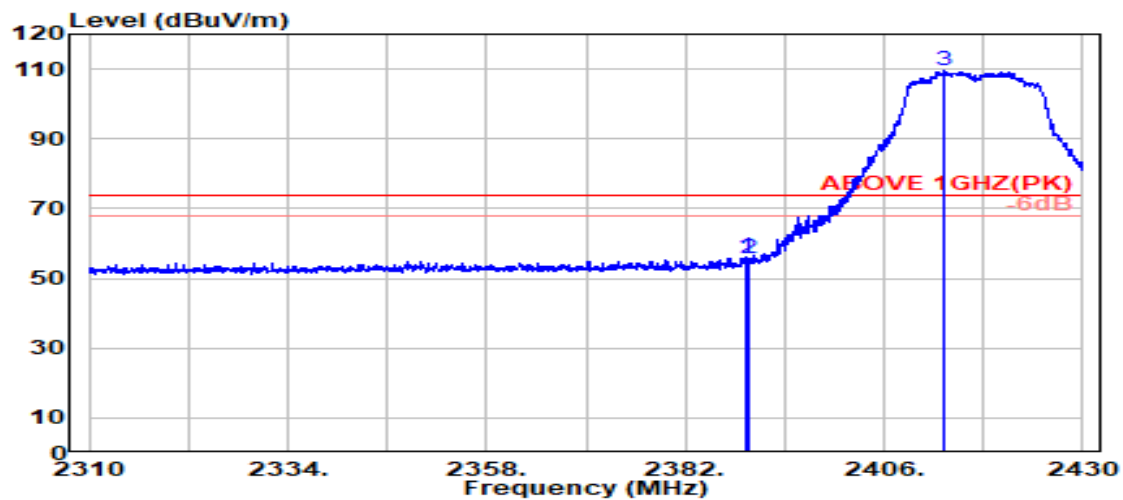

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	62.08	56.06	74.00	17.94	Peak
2389.800	28.14	5.72	39.88	61.55	55.53	74.00	18.47	Peak
@ 2413.200	28.15	5.75	39.88	115.43	109.45	---	---	Peak

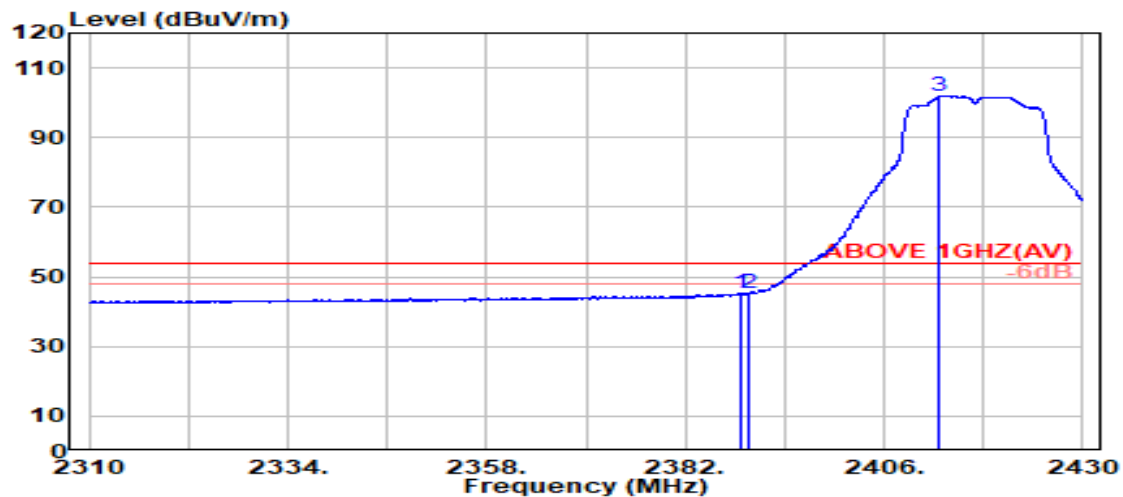

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	51.39	45.37	54.00	8.63	Average
2389.800	28.14	5.72	39.88	51.12	45.10	54.00	8.90	Average
@ 2412.750	28.15	5.75	39.88	107.87	101.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

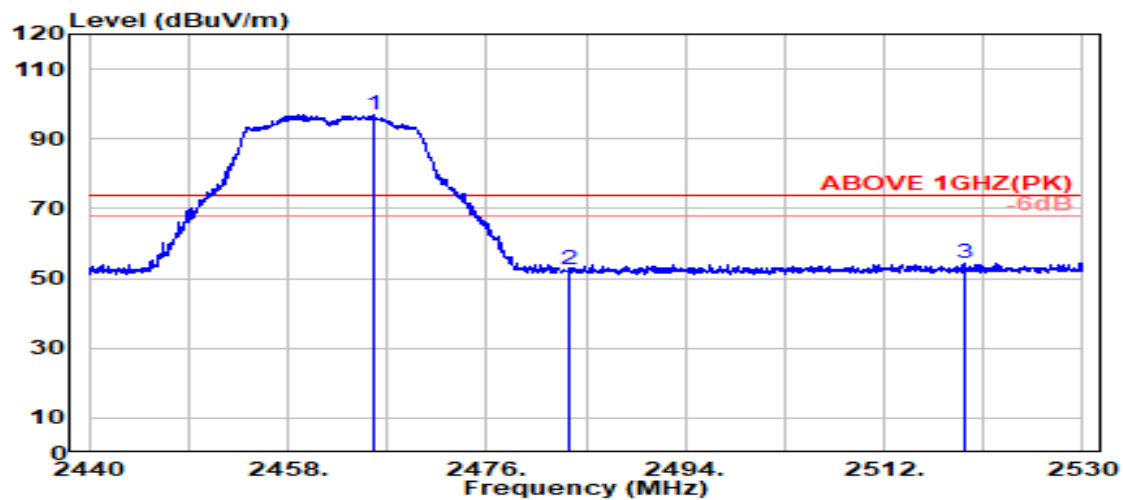

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.33	5.81	39.87	102.60	96.87	---	---	Peak
2483.500	28.37	5.83	39.87	58.08	52.40	74.00	21.60	Peak
2519.300	28.52	5.87	39.88	59.89	54.41	74.00	19.59	Peak

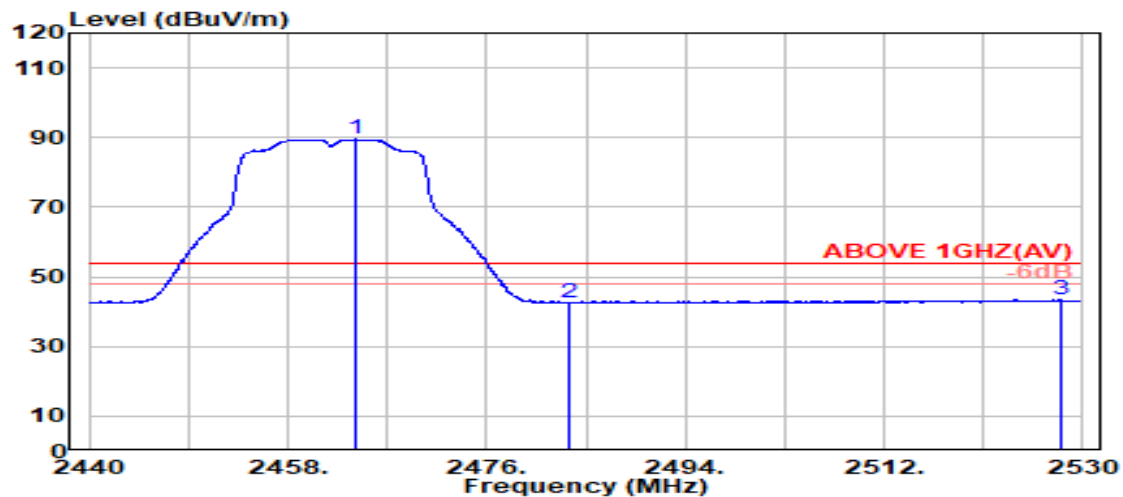


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.150	28.33	5.81	39.87	95.26	89.52	---	---	Average
2483.500	28.37	5.83	39.87	48.35	42.68	54.00	11.32	Average
2527.950	28.57	5.88	39.88	48.80	43.37	54.00	10.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

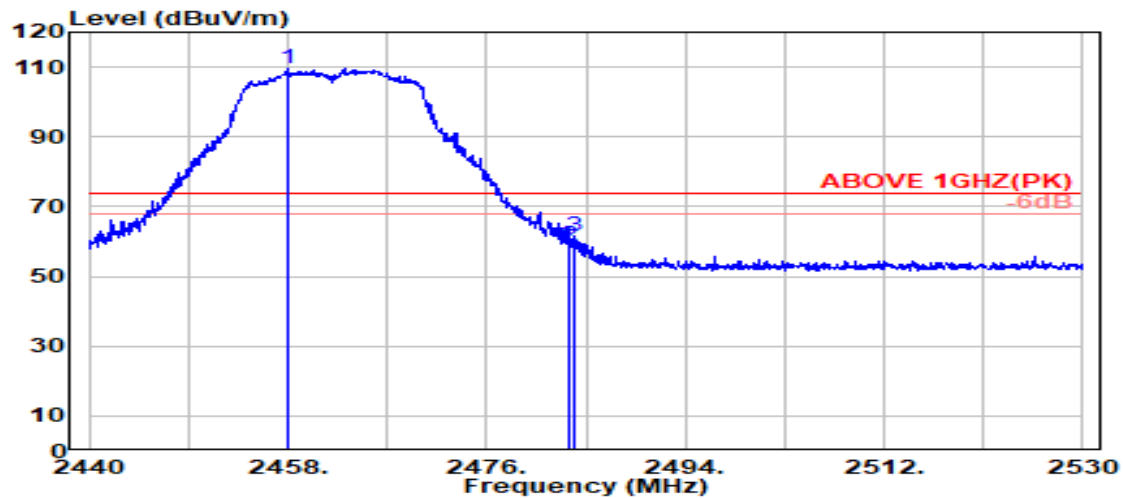

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.32	5.80	39.87	115.18	109.43	---	---	Peak
2483.500	28.37	5.83	39.87	64.41	58.73	74.00	15.27	Peak
2483.900	28.37	5.83	39.87	67.10	61.43	74.00	12.57	Peak

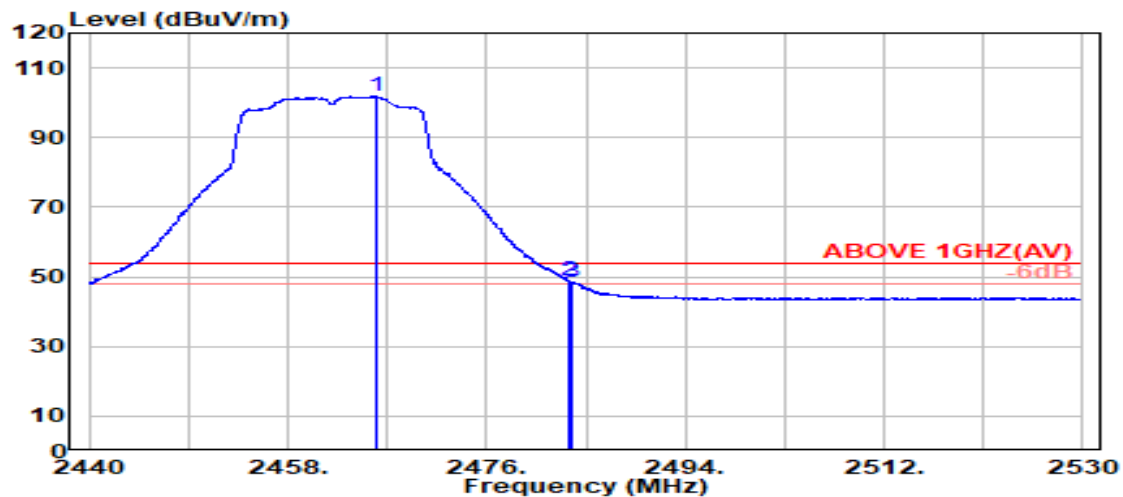

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.33	5.81	39.87	107.59	101.86	---	---	Average
2483.500	28.37	5.83	39.87	54.57	48.90	54.00	5.10	Average
2483.700	28.37	5.83	39.87	54.26	48.58	54.00	5.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

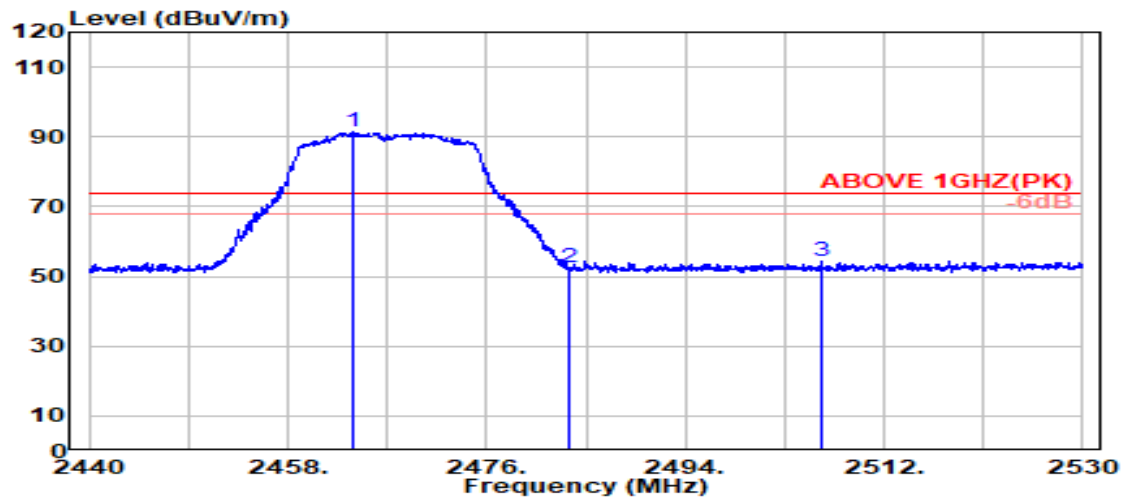

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.800	28.33	5.81	39.87	97.07	91.34	---	---	Peak
2483.500	28.37	5.83	39.87	58.43	52.75	74.00	21.25	Peak
2506.350	28.44	5.86	39.87	60.06	54.49	74.00	19.51	Peak

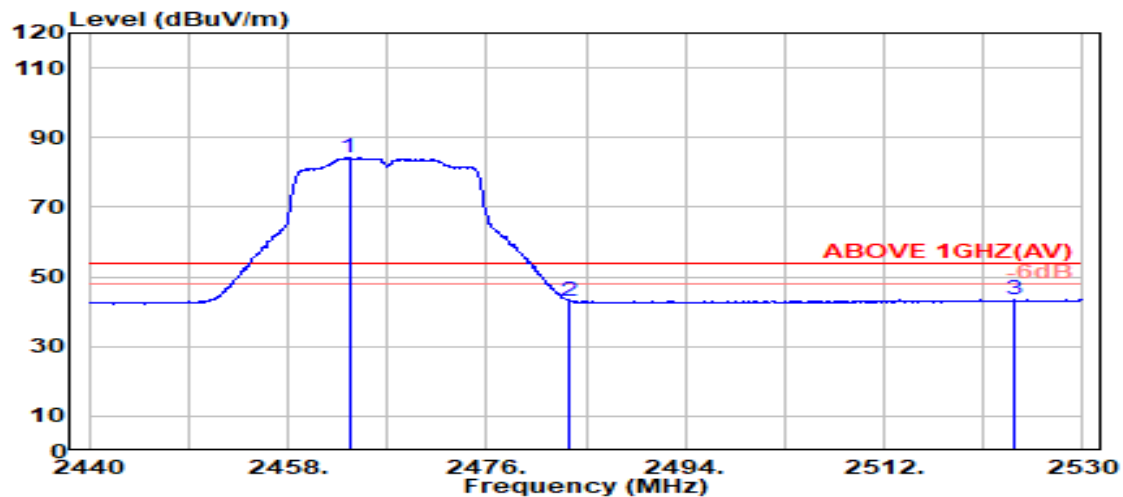

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.550	28.33	5.81	39.87	89.85	84.11	---	---	Average
2483.500	28.37	5.83	39.87	48.91	43.24	54.00	10.76	Average
2523.900	28.54	5.88	39.88	48.86	43.41	54.00	10.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

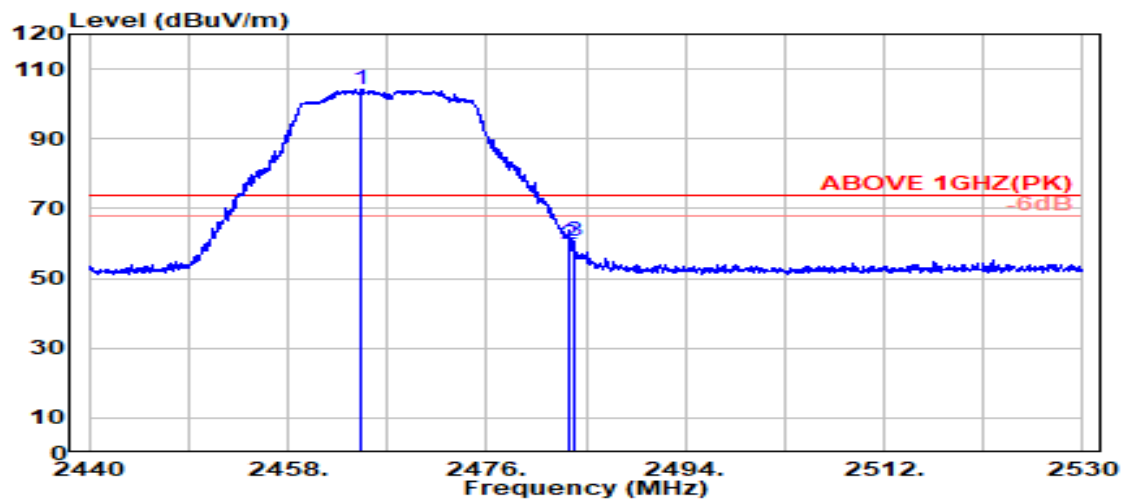

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.650	28.33	5.81	39.87	110.07	104.34	---	---	Peak
2483.500	28.37	5.83	39.87	65.33	59.66	74.00	14.34	Peak
2483.900	28.37	5.83	39.87	66.53	60.86	74.00	13.14	Peak

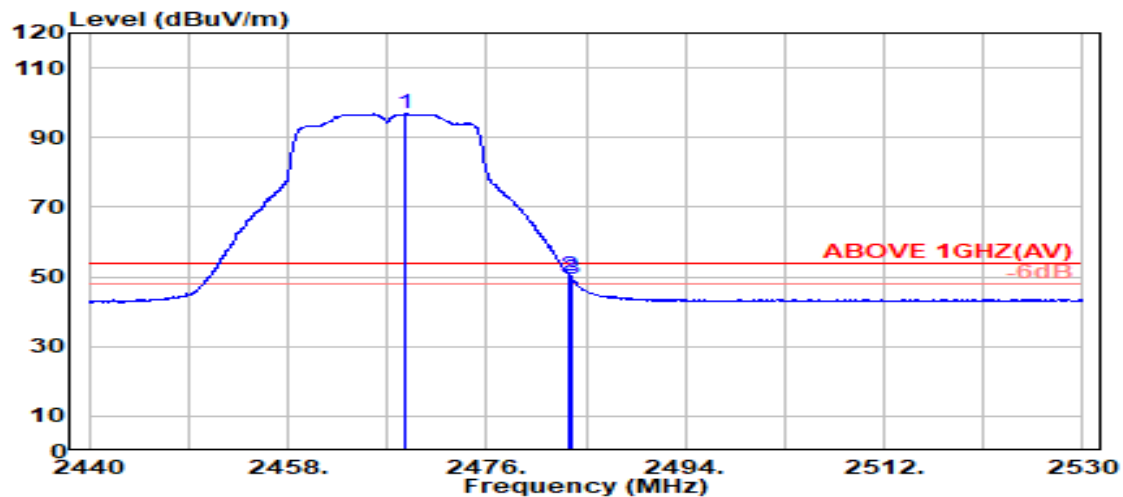

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.700	28.34	5.81	39.87	102.50	96.78	---	---	Average
2483.500	28.37	5.83	39.87	56.07	50.39	54.00	3.61	Average
2483.700	28.37	5.83	39.87	55.10	49.42	54.00	4.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

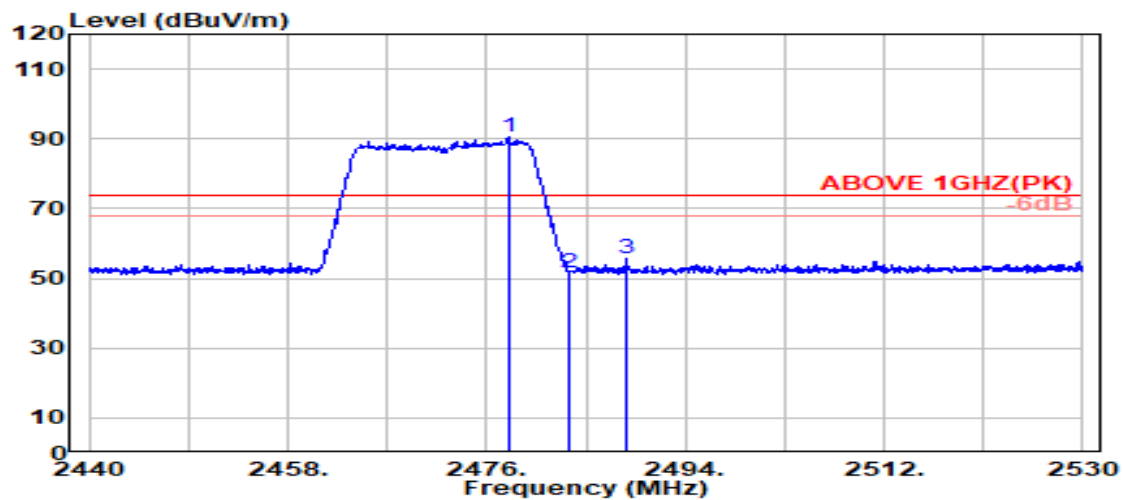

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.950	28.36	5.82	39.87	96.16	90.47	---	---	Peak
2483.500	28.37	5.83	39.87	57.24	51.57	74.00	22.43	Peak
2488.700	28.38	5.84	39.87	61.24	55.59	74.00	18.41	Peak

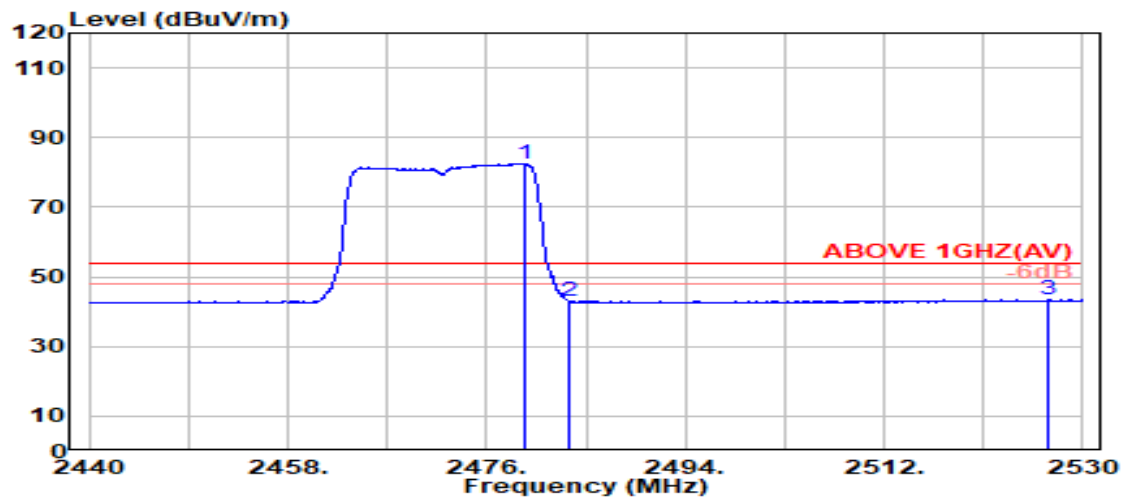

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.450	28.36	5.83	39.87	88.25	82.56	---	---	Average
2483.500	28.37	5.83	39.87	48.58	42.90	54.00	11.10	Average
2526.950	28.56	5.88	39.88	48.90	43.47	54.00	10.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

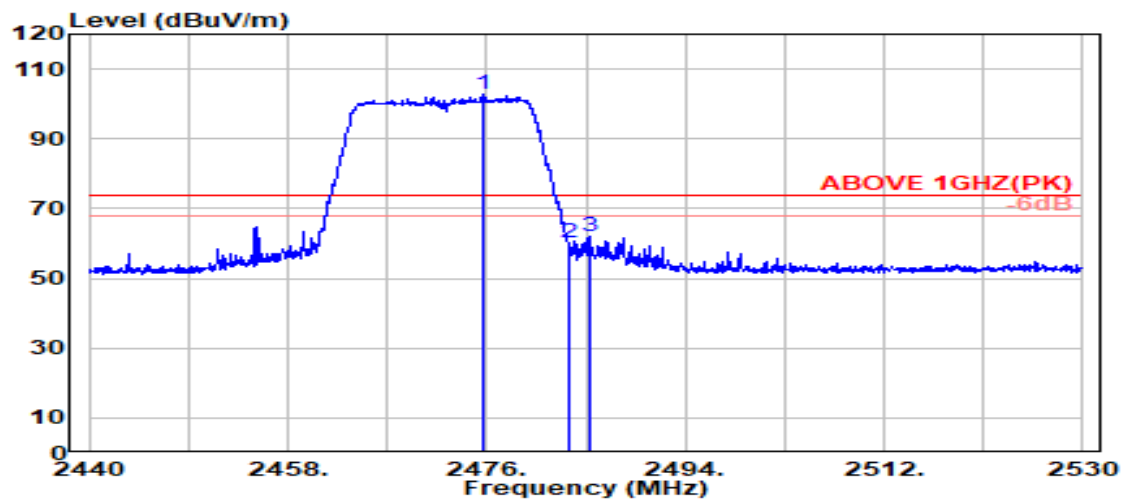

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	28.35	5.82	39.87	108.34	102.64	---	---	Peak
2483.500	28.37	5.83	39.87	66.12	60.45	74.00	13.55	Peak
2485.250	28.37	5.83	39.87	67.66	62.00	74.00	12.00	Peak

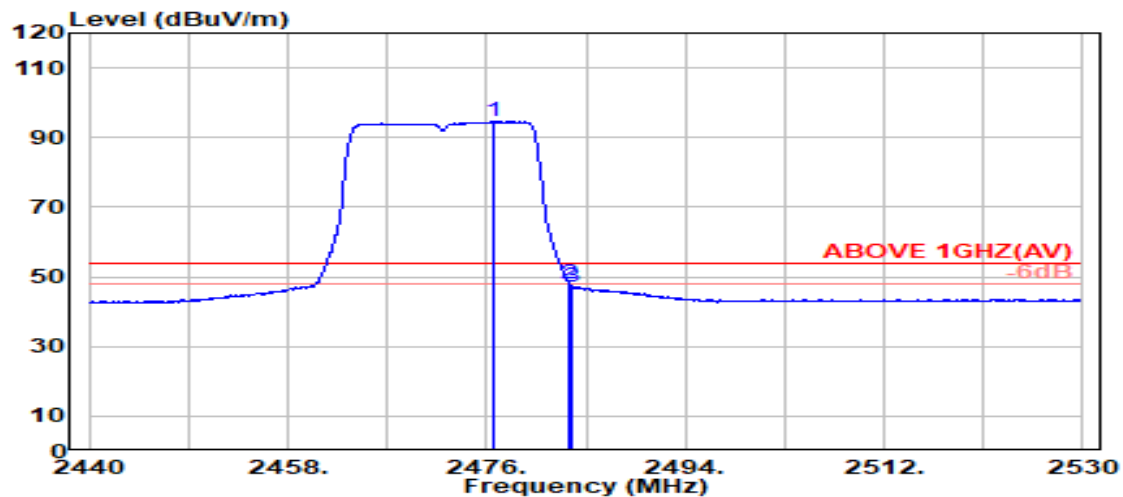

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.550	28.35	5.82	39.87	100.26	94.57	---	---	Average
2483.500	28.37	5.83	39.87	53.58	47.91	54.00	6.09	Average
2483.750	28.37	5.83	39.87	52.93	47.25	54.00	6.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

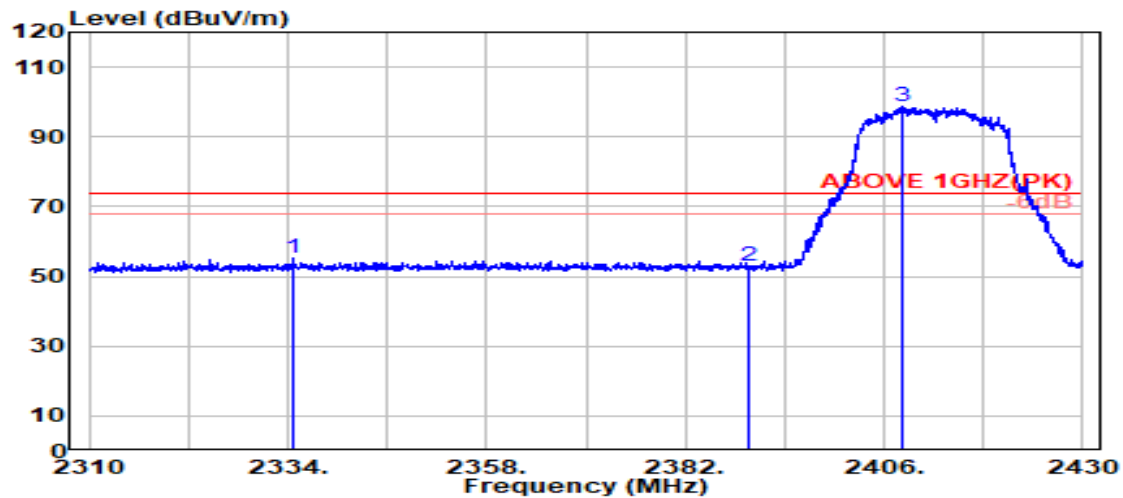

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2334.600	28.21	5.65	39.88	61.30	55.28	74.00	18.72	Peak
2389.800	28.14	5.72	39.88	58.88	52.87	74.00	21.13	Peak
@ 2408.100	28.13	5.74	39.88	104.50	98.50	---	---	Peak

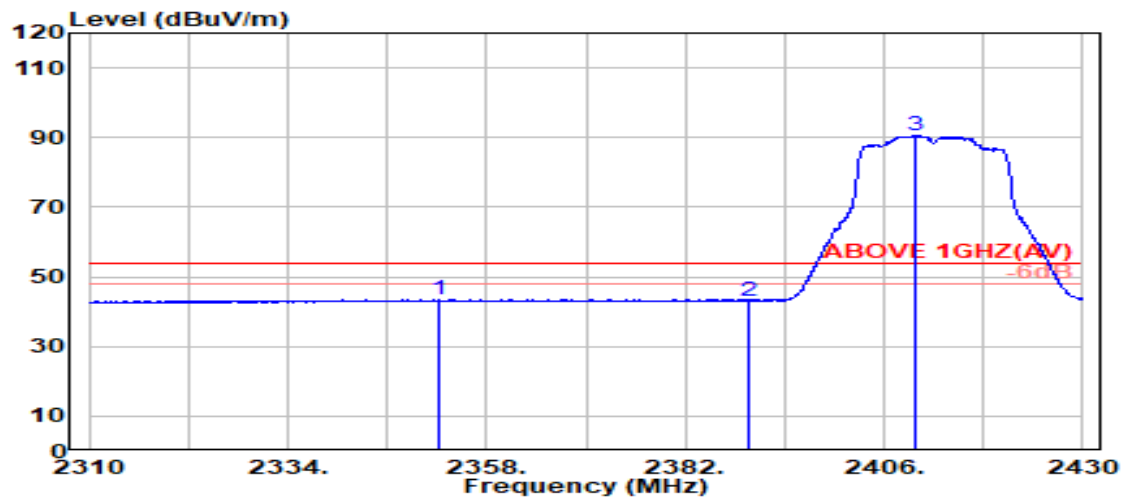

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2352.300	28.29	5.68	39.88	49.40	43.49	54.00	10.51	Average
2389.800	28.14	5.72	39.88	49.10	43.09	54.00	10.91	Average
@ 2409.800	28.14	5.74	39.88	96.71	90.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

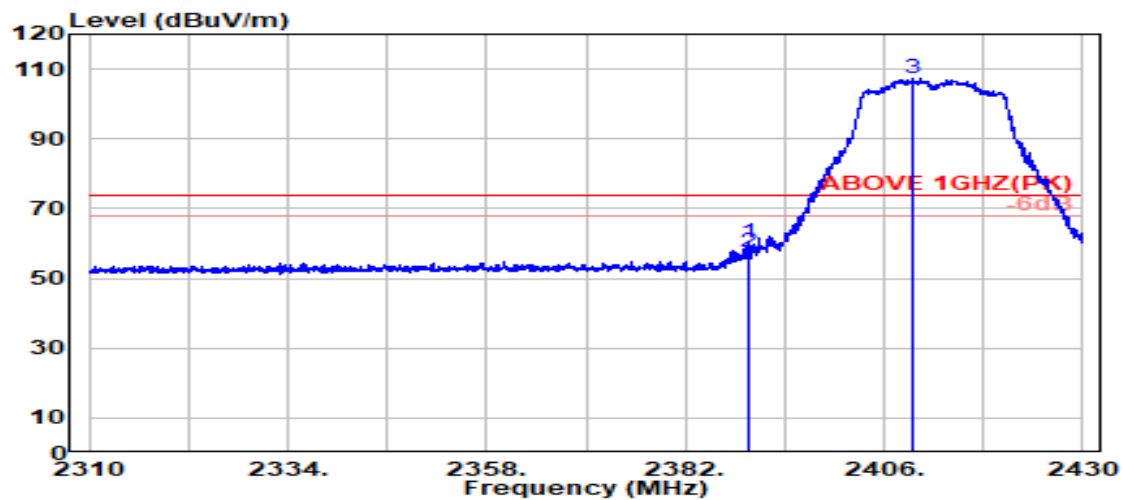

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	66.17	60.15	74.00	13.85	Peak
2389.800	28.14	5.72	39.88	63.59	57.58	74.00	16.42	Peak
@ 2409.550	28.14	5.74	39.88	113.45	107.46	---	---	Peak

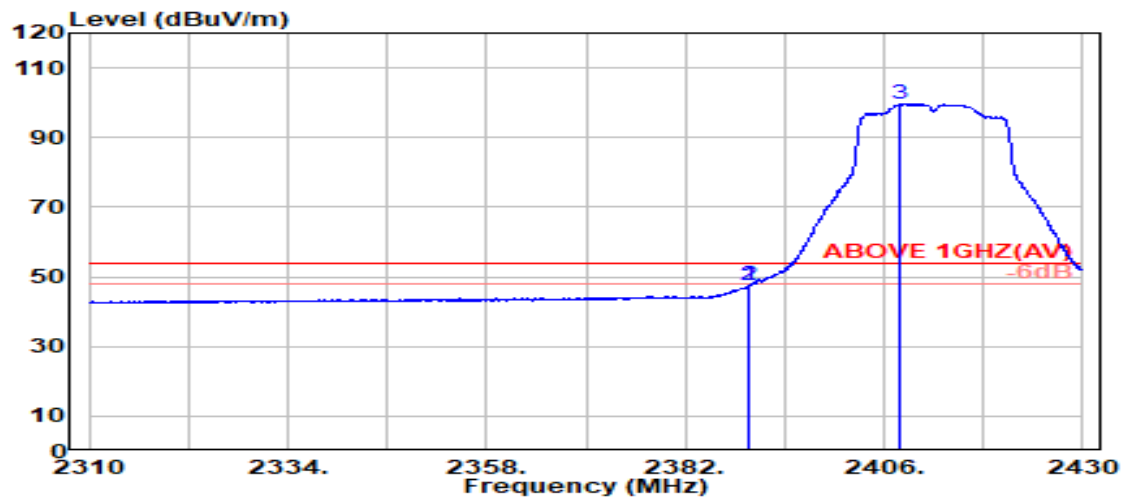

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	53.42	47.40	54.00	6.60	Average
2389.800	28.14	5.72	39.88	53.62	47.60	54.00	6.40	Average
@ 2407.950	28.13	5.74	39.88	105.77	99.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

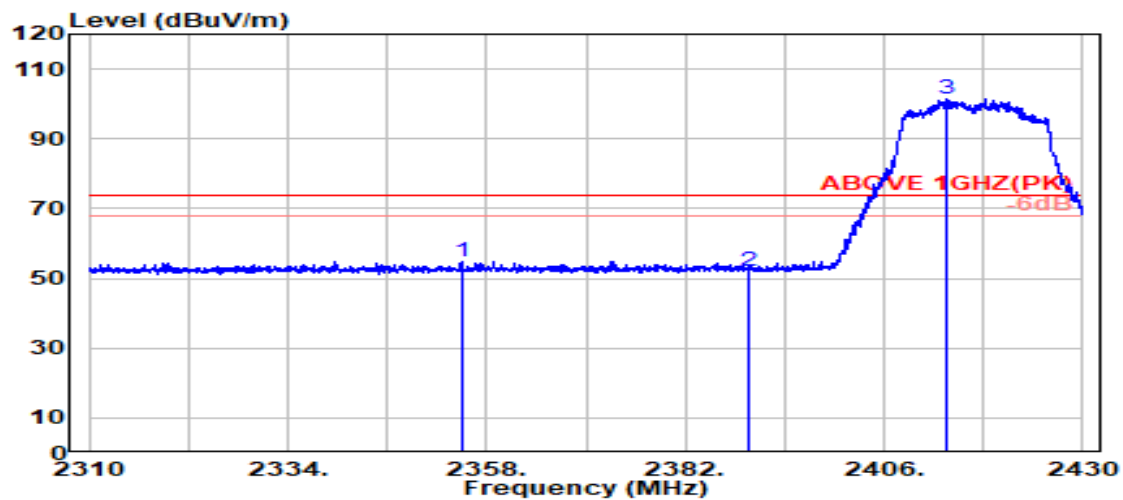

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.100	28.28	5.68	39.88	60.91	54.98	74.00	19.02	Peak
2389.800	28.14	5.72	39.88	58.08	52.06	74.00	21.94	Peak
@ 2413.600	28.15	5.75	39.88	107.42	101.44	---	---	Peak

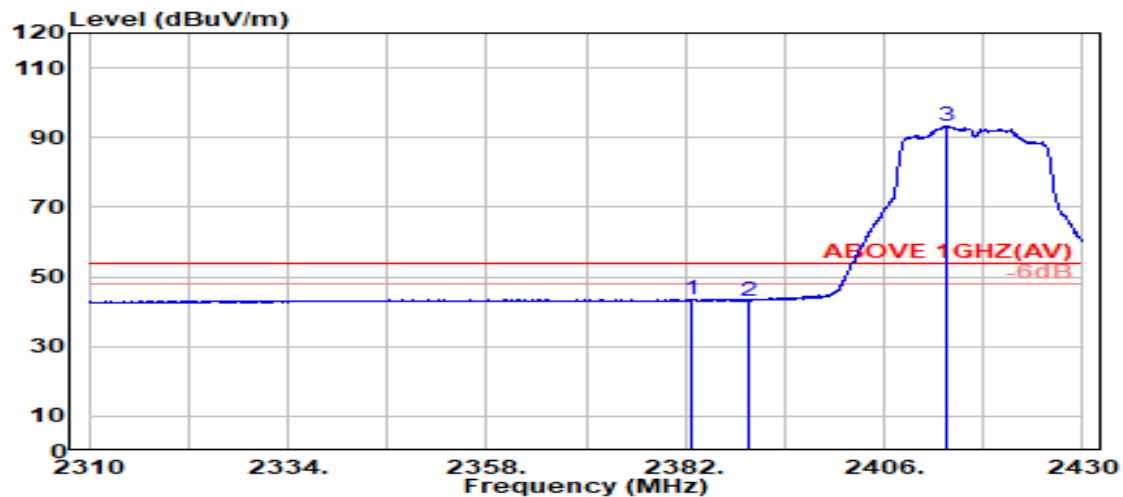

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.600	28.17	5.71	39.88	49.59	43.59	54.00	10.41	Average
2389.800	28.14	5.72	39.88	49.25	43.23	54.00	10.77	Average
@ 2413.650	28.16	5.75	39.88	99.21	93.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

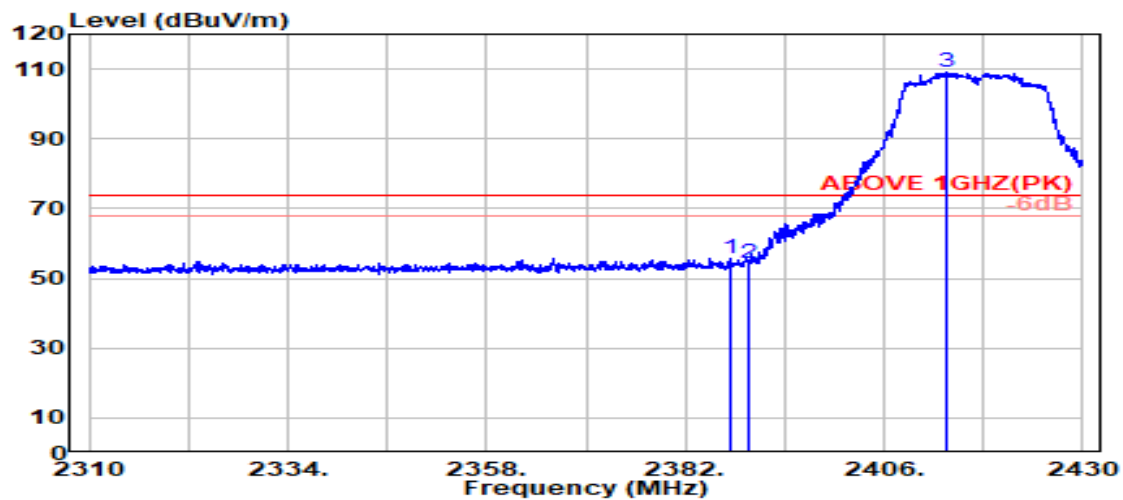

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.15	5.72	39.88	61.81	55.80	74.00	18.20	Peak
2389.800	28.14	5.72	39.88	60.38	54.36	74.00	19.64	Peak
@ 2413.400	28.15	5.75	39.88	115.03	109.06	---	---	Peak

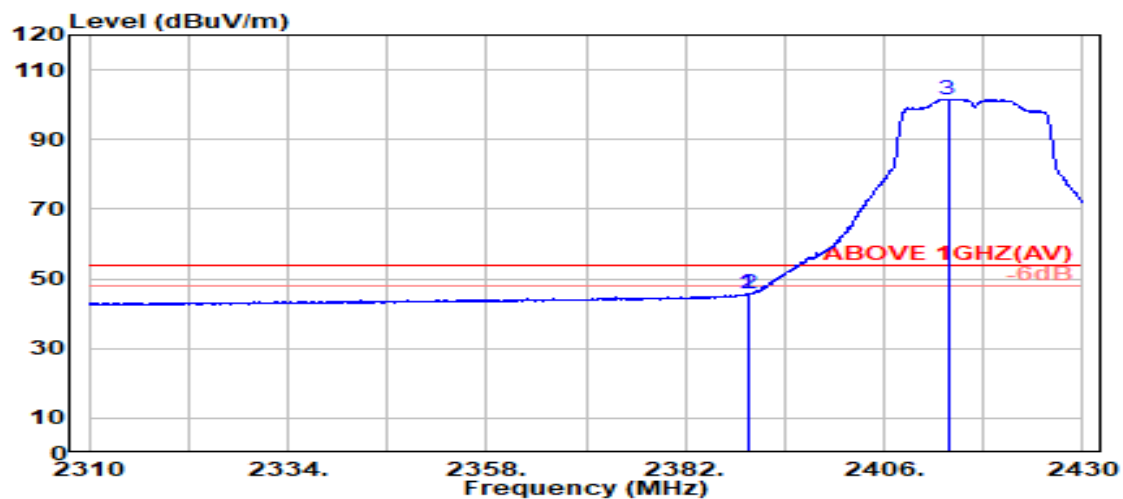

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	51.79	45.78	54.00	8.22	Average
2389.800	28.14	5.72	39.88	51.65	45.63	54.00	8.37	Average
@ 2413.700	28.16	5.75	39.88	107.57	101.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

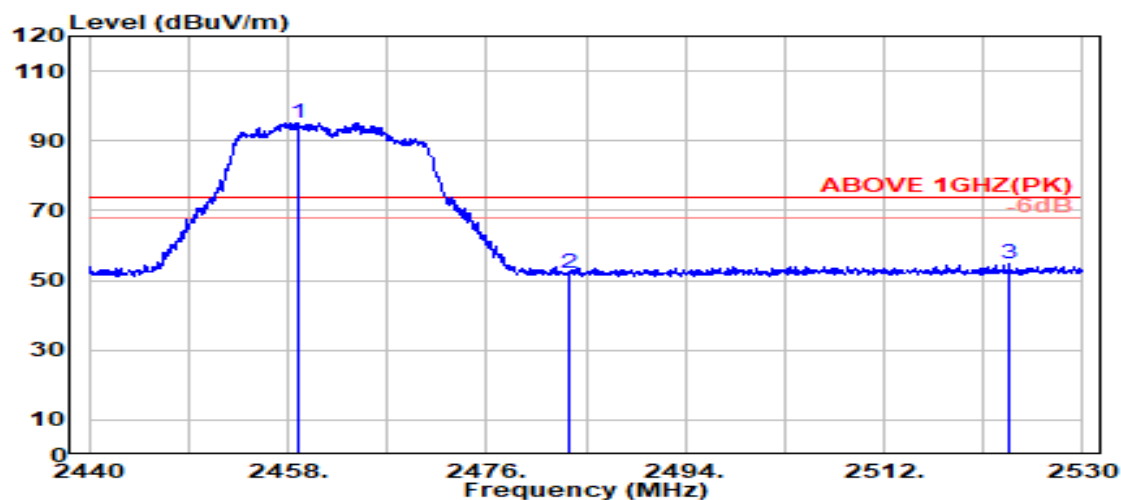

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	28.32	5.80	39.87	100.96	95.21	---	---	Peak
2483.500	28.37	5.83	39.87	57.90	52.23	74.00	21.77	Peak
2523.250	28.54	5.88	39.88	60.20	54.74	74.00	19.26	Peak

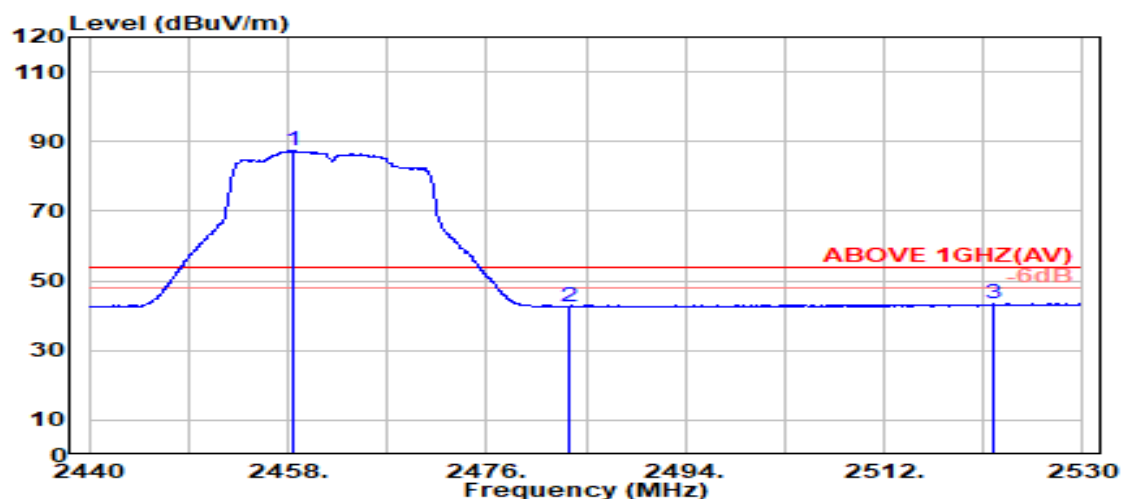

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.450	28.32	5.80	39.87	93.25	87.50	---	---	Average
2483.500	28.37	5.83	39.87	48.36	42.69	54.00	11.31	Average
2521.950	28.53	5.88	39.88	48.86	43.39	54.00	10.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

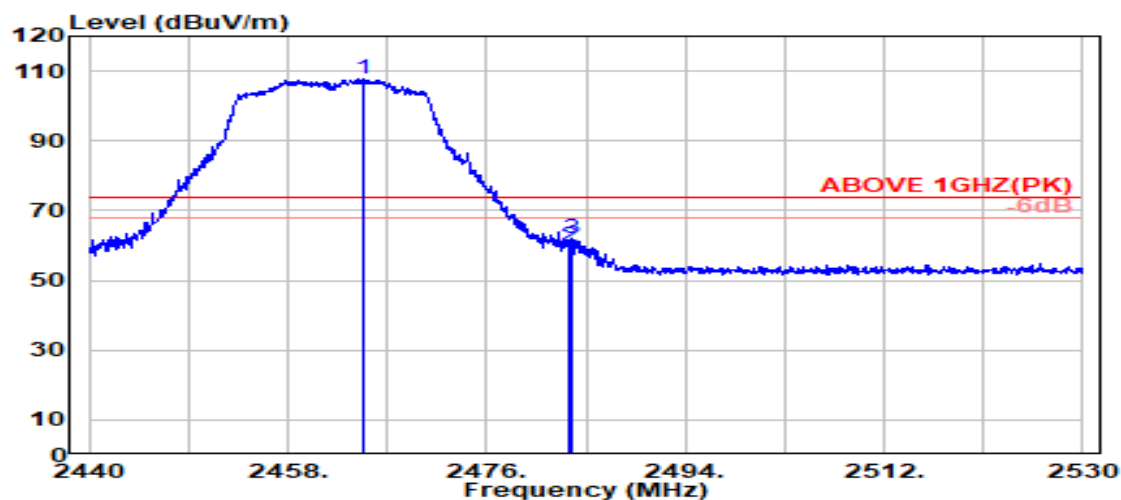

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.950	28.33	5.81	39.87	113.62	107.89	---	---	Peak
2483.500	28.37	5.83	39.87	65.39	59.72	74.00	14.28	Peak
2483.800	28.37	5.83	39.87	67.55	61.88	74.00	12.12	Peak

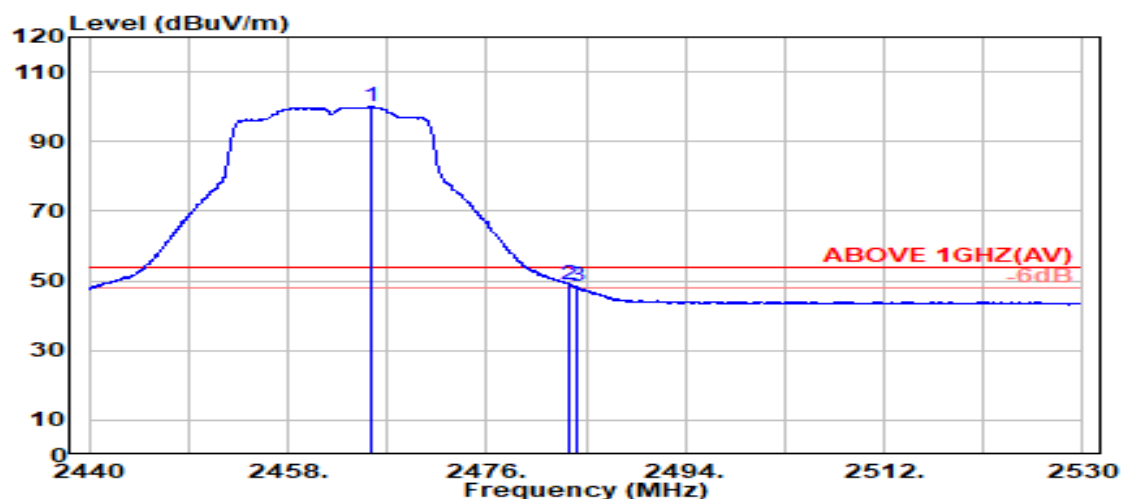

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.33	5.81	39.87	105.76	100.03	---	---	Average
2483.500	28.37	5.83	39.87	54.70	49.03	54.00	4.97	Average
2484.150	28.37	5.83	39.87	54.10	48.43	54.00	5.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

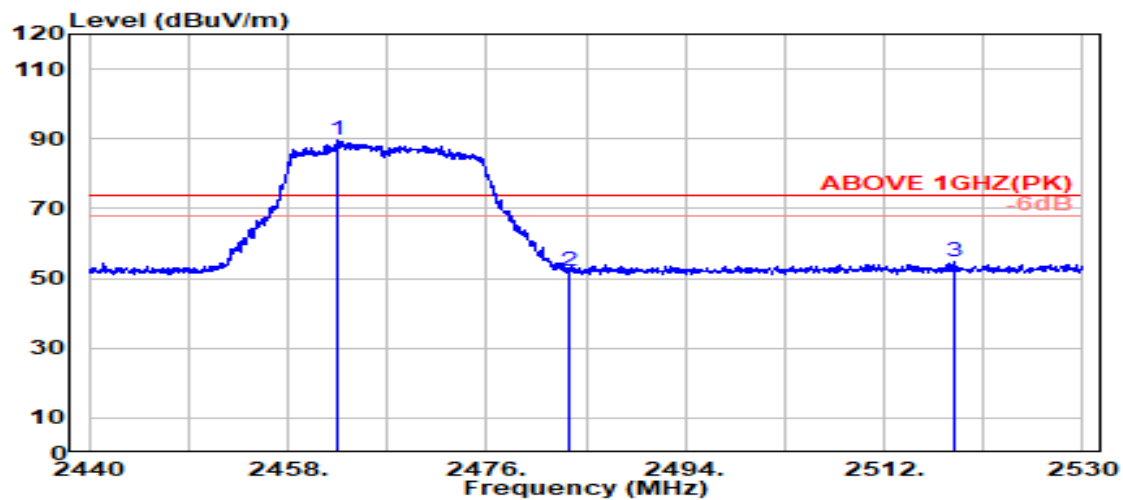

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.550	28.33	5.81	39.87	95.59	89.85	---	---	Peak
2483.500	28.37	5.83	39.87	57.58	51.91	74.00	22.09	Peak
2518.450	28.51	5.87	39.88	60.19	54.70	74.00	19.30	Peak

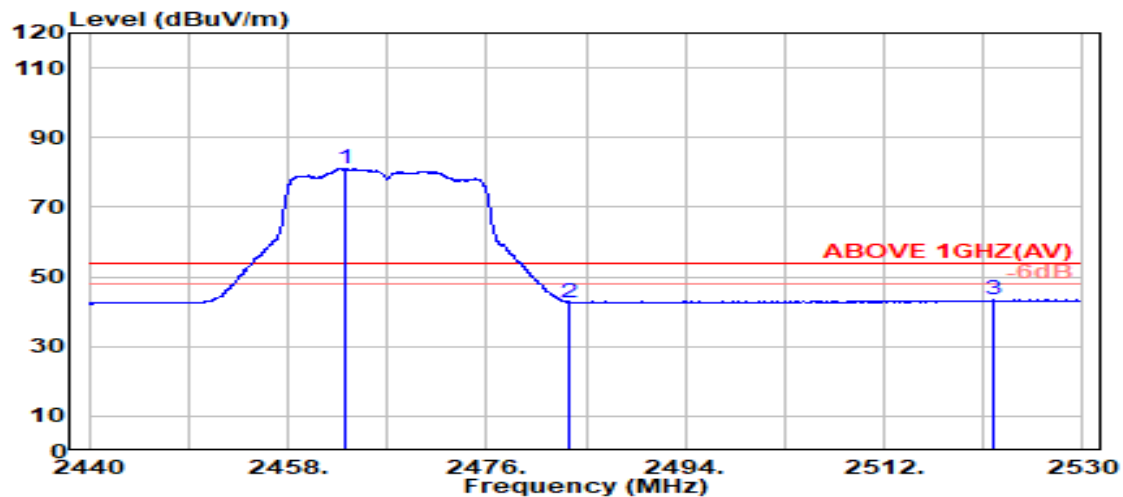

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.250	28.33	5.81	39.87	86.89	81.15	---	---	Average
2483.500	28.37	5.83	39.87	48.39	42.72	54.00	11.28	Average
2521.850	28.53	5.88	39.88	48.91	43.44	54.00	10.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

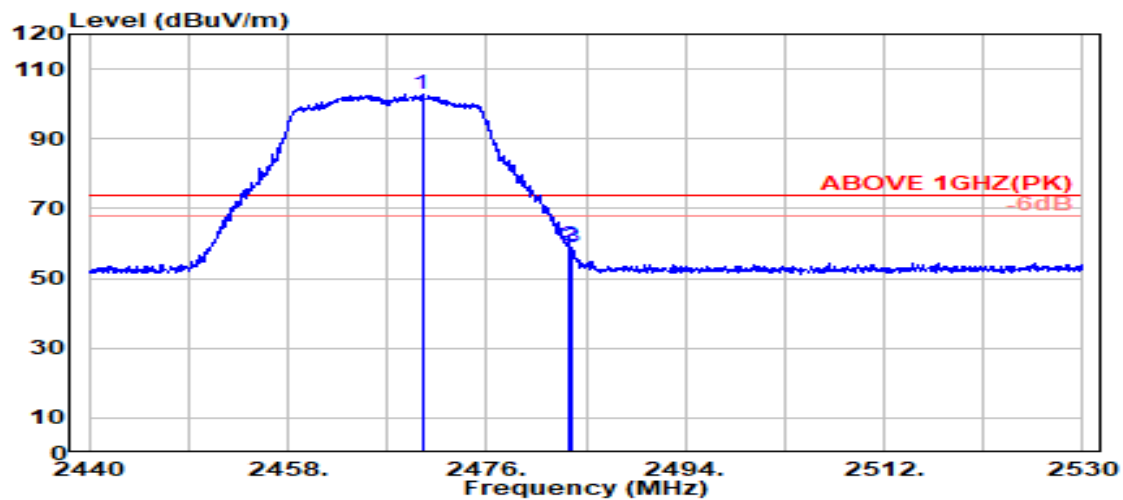

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.150	28.34	5.82	39.87	108.35	102.64	---	---	Peak
2483.500	28.37	5.83	39.87	65.19	59.52	74.00	14.48	Peak
2483.800	28.37	5.83	39.87	64.69	59.02	74.00	14.98	Peak

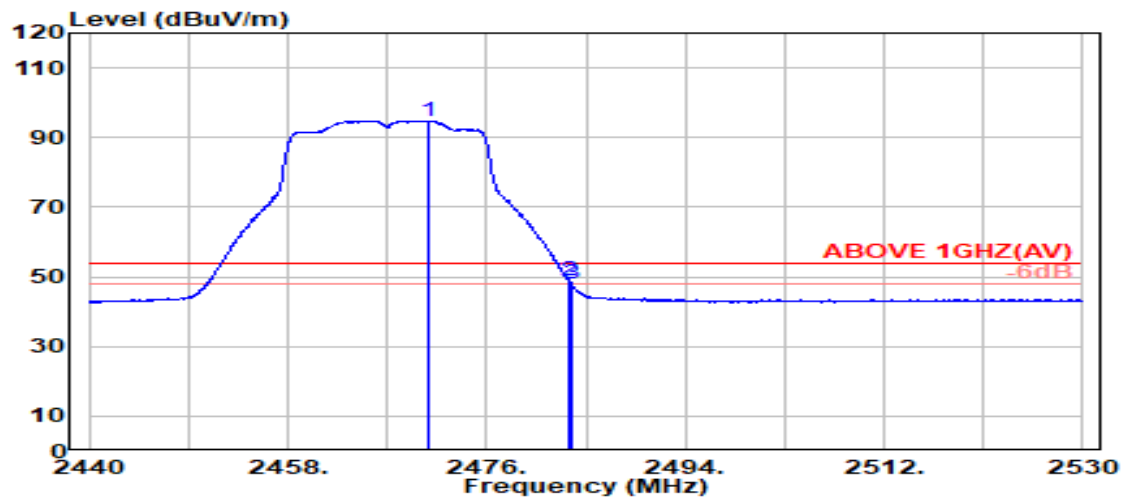

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.650	28.34	5.82	39.87	100.50	94.78	---	---	Average
2483.500	28.37	5.83	39.87	54.73	49.06	54.00	4.94	Average
2483.700	28.37	5.83	39.87	53.50	47.83	54.00	6.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

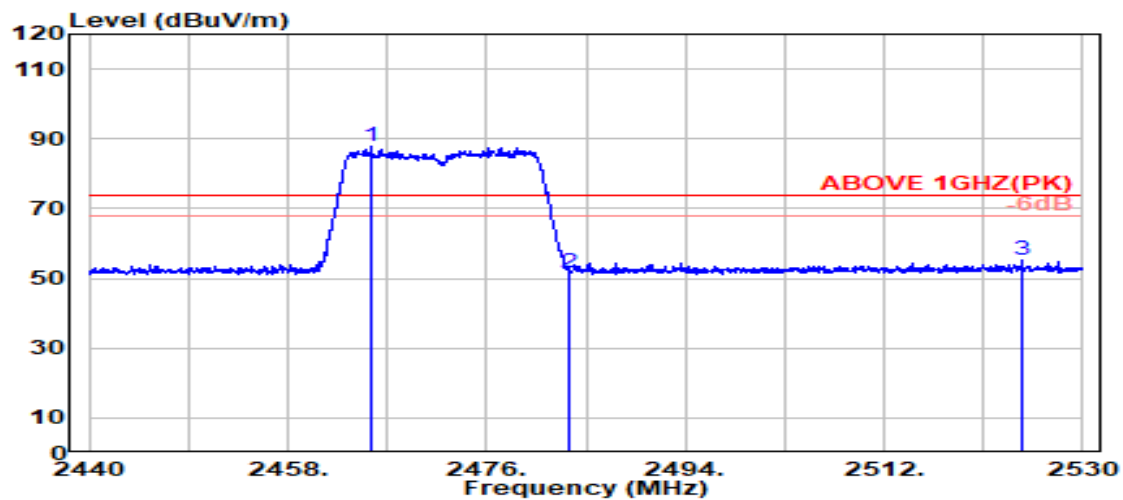

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.550	28.33	5.81	39.87	93.36	87.63	---	---	Peak
2483.500	28.37	5.83	39.87	57.35	51.67	74.00	22.33	Peak
2524.450	28.55	5.88	39.88	60.66	55.21	74.00	18.79	Peak

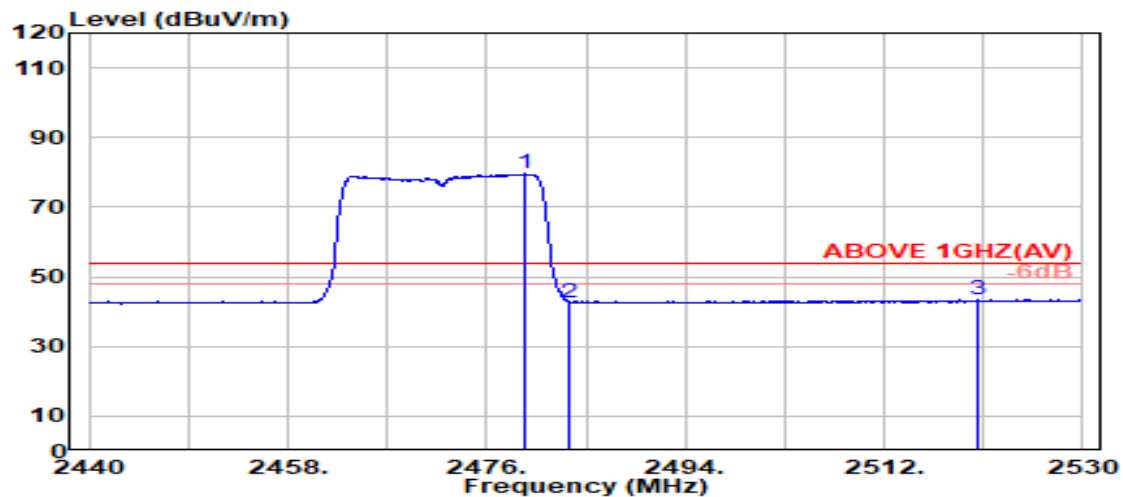

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.36	5.83	39.87	85.28	79.60	---	---	Average
2483.500	28.37	5.83	39.87	48.42	42.74	54.00	11.26	Average
2520.550	28.52	5.88	39.88	48.87	43.39	54.00	10.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

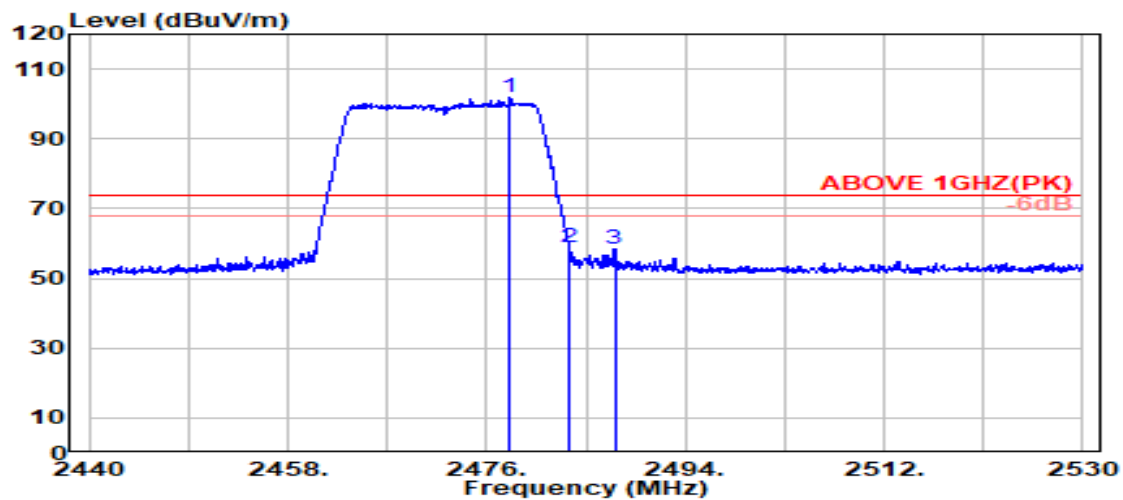

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.36	5.82	39.87	107.36	101.67	---	---	Peak
2483.500	28.37	5.83	39.87	64.75	59.07	74.00	14.93	Peak
2487.600	28.38	5.84	39.87	64.04	58.38	74.00	15.62	Peak

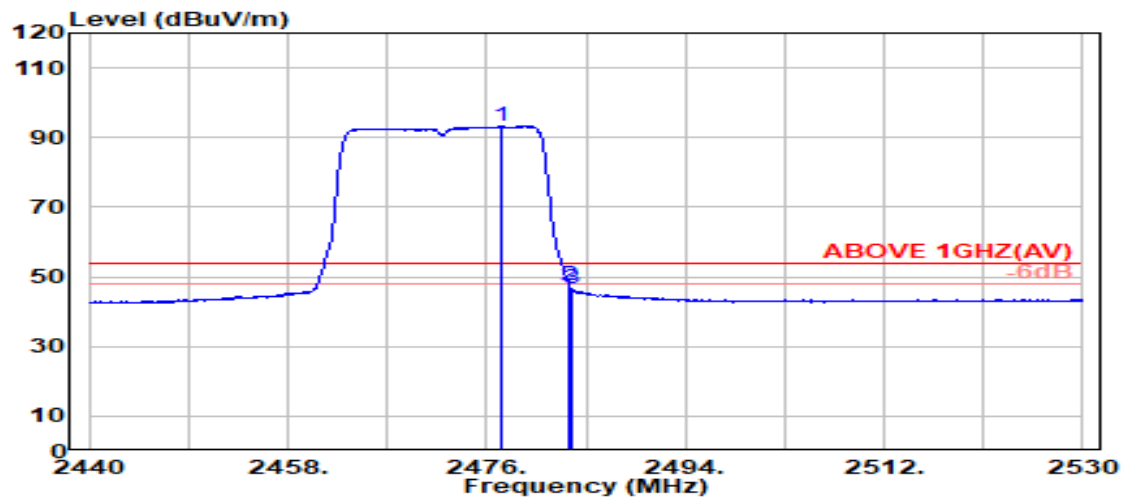

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.300	28.35	5.82	39.87	98.96	93.27	---	---	Average
2483.500	28.37	5.83	39.87	53.17	47.49	54.00	6.51	Average
2483.700	28.37	5.83	39.87	52.12	46.45	54.00	7.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

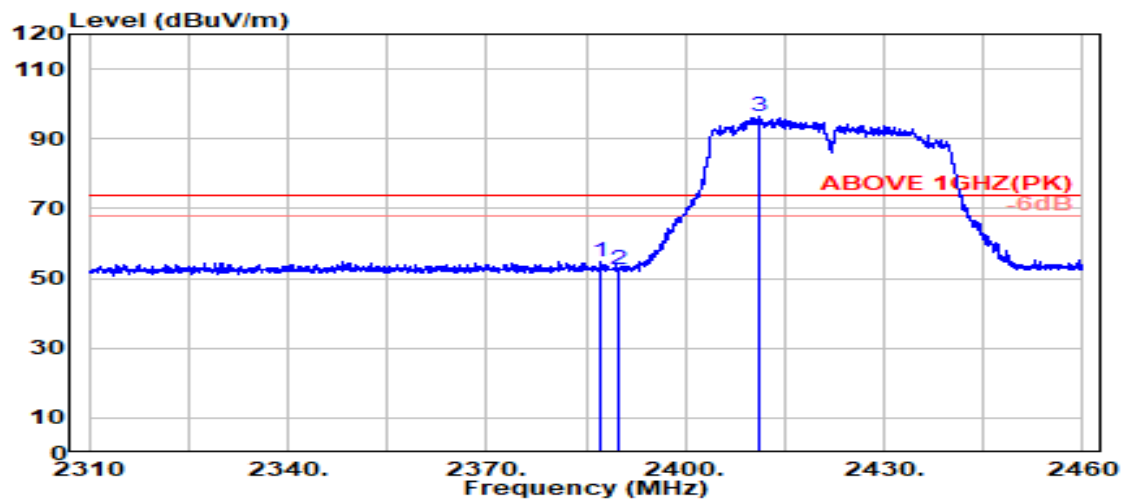

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.250	28.15	5.72	39.88	60.65	54.64	74.00	19.36	Peak
2389.800	28.14	5.72	39.88	58.61	52.59	74.00	21.41	Peak
@ 2411.250	28.15	5.75	39.88	102.31	96.32	---	---	Peak

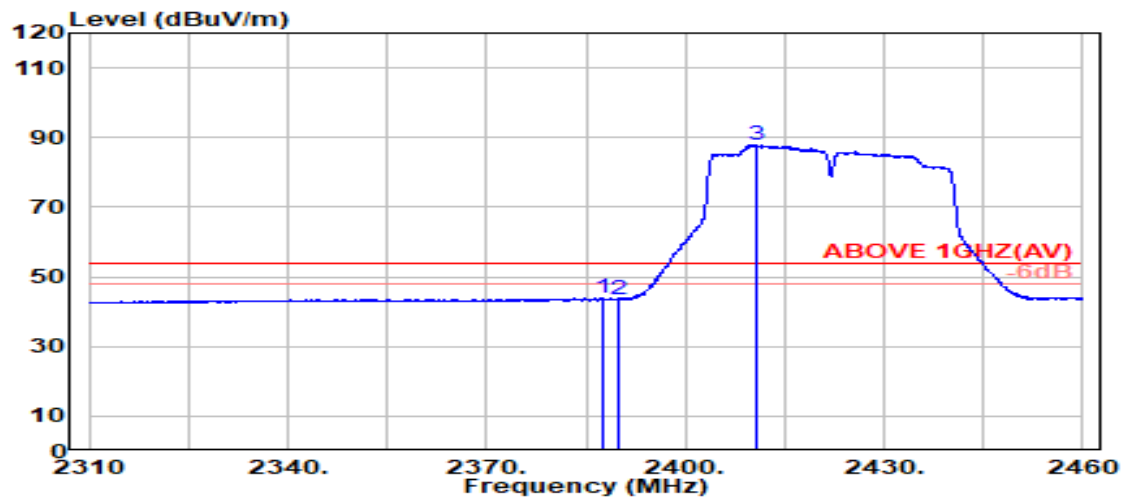

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.15	5.72	39.88	49.81	43.80	54.00	10.20	Average
2389.800	28.14	5.72	39.88	49.47	43.46	54.00	10.54	Average
@ 2410.600	28.14	5.75	39.88	93.89	87.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

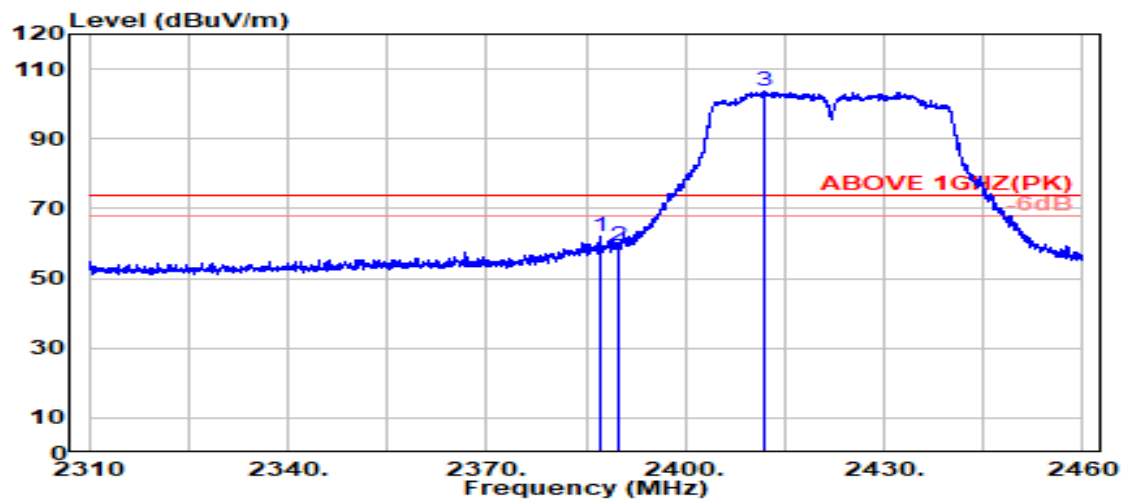

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.150	28.15	5.72	39.88	68.10	62.09	74.00	11.91	Peak
2389.800	28.14	5.72	39.88	65.16	59.14	74.00	14.86	Peak
@ 2412.000	28.15	5.75	39.88	109.64	103.66	---	---	Peak

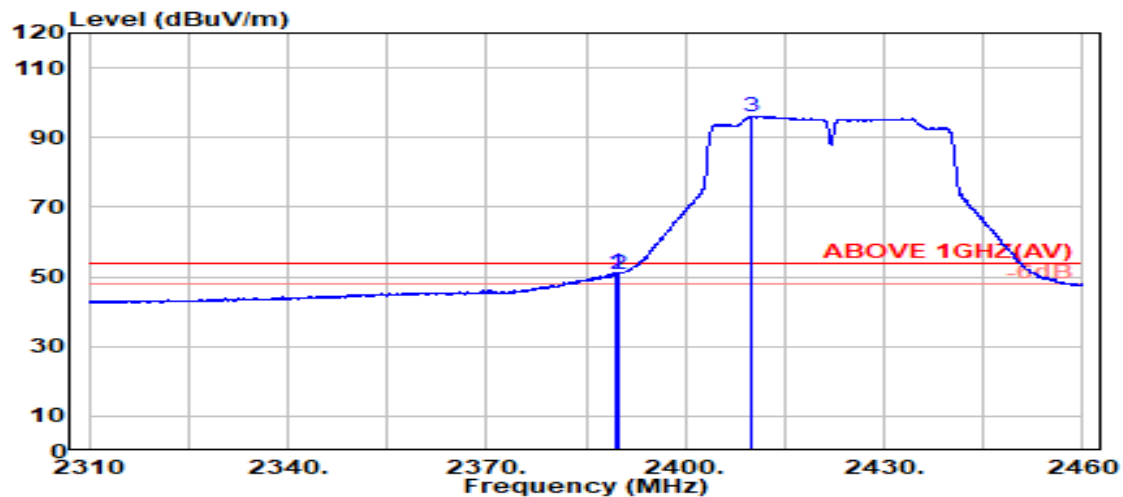

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	57.19	51.18	54.00	2.82	Average
2389.800	28.14	5.72	39.88	56.74	50.72	54.00	3.28	Average
@ 2409.950	28.14	5.74	39.88	102.01	96.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

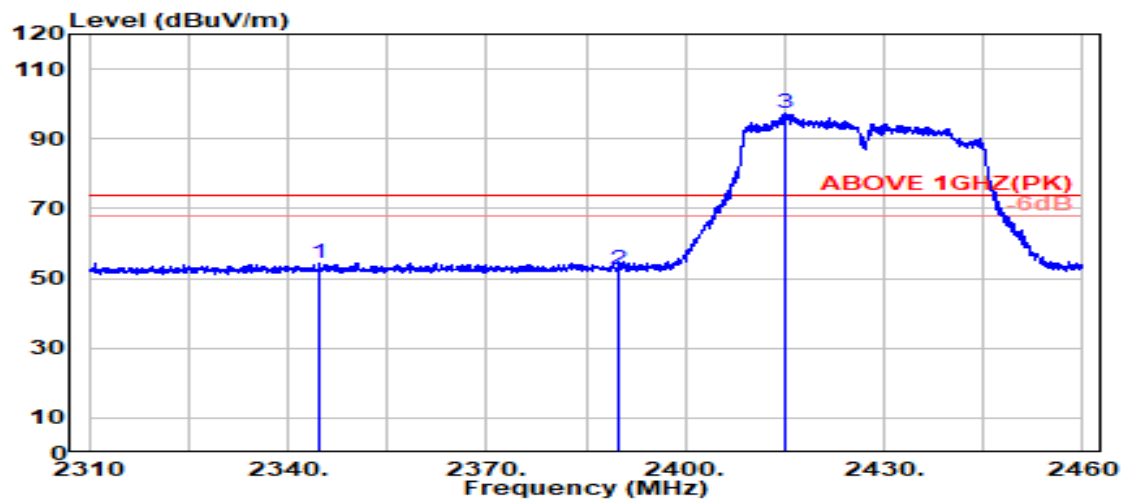

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.850	28.27	5.67	39.88	60.48	54.53	74.00	19.47	Peak
2389.800	28.14	5.72	39.88	58.47	52.45	74.00	21.55	Peak
@ 2415.250	28.16	5.75	39.88	103.51	97.55	---	---	Peak

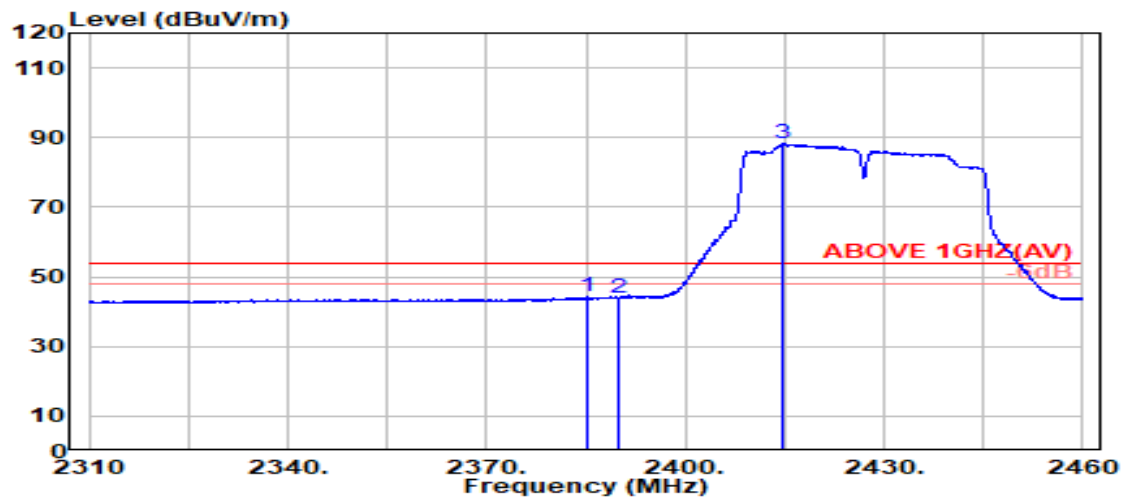

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.250	28.16	5.72	39.88	50.23	44.23	54.00	9.77	Average
2389.800	28.14	5.72	39.88	49.94	43.92	54.00	10.08	Average
@ 2414.850	28.16	5.75	39.88	94.37	88.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

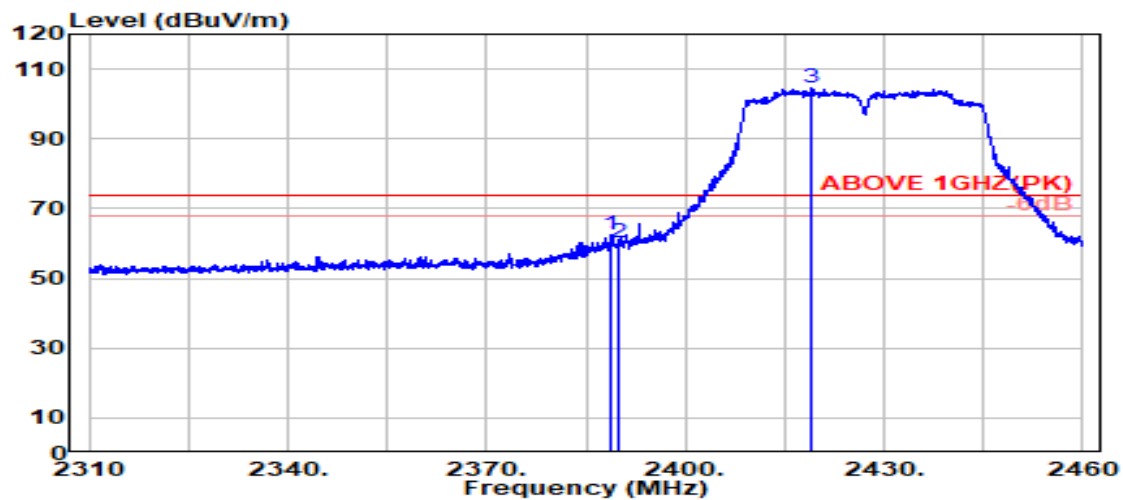

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.88	68.51	62.49	74.00	11.51	Peak
2389.800	28.14	5.72	39.88	66.15	60.13	74.00	13.87	Peak
@ 2419.150	28.18	5.76	39.88	110.51	104.57	---	---	Peak

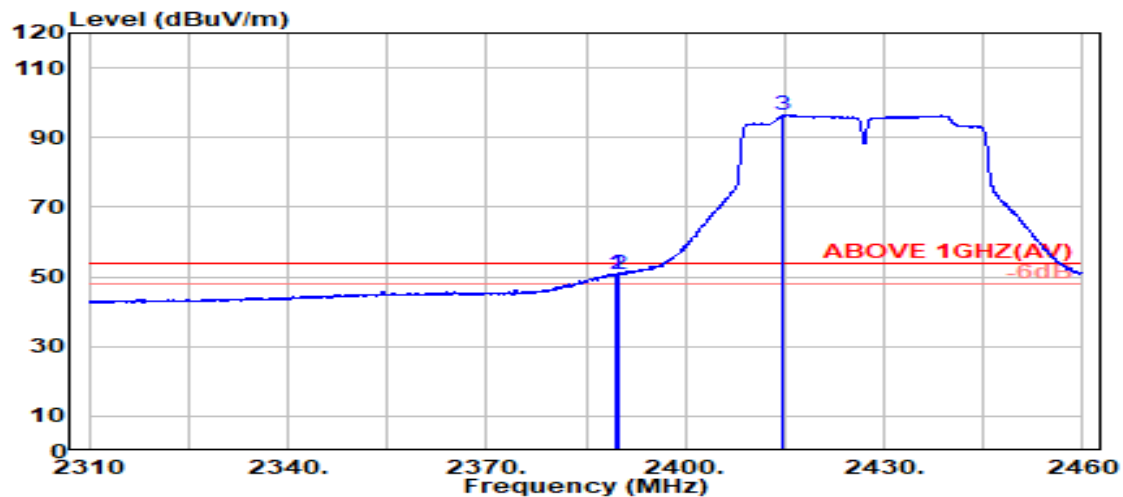

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	56.89	50.88	54.00	3.12	Average
2389.800	28.14	5.72	39.88	56.90	50.88	54.00	3.12	Average
@ 2414.750	28.16	5.75	39.88	102.49	96.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

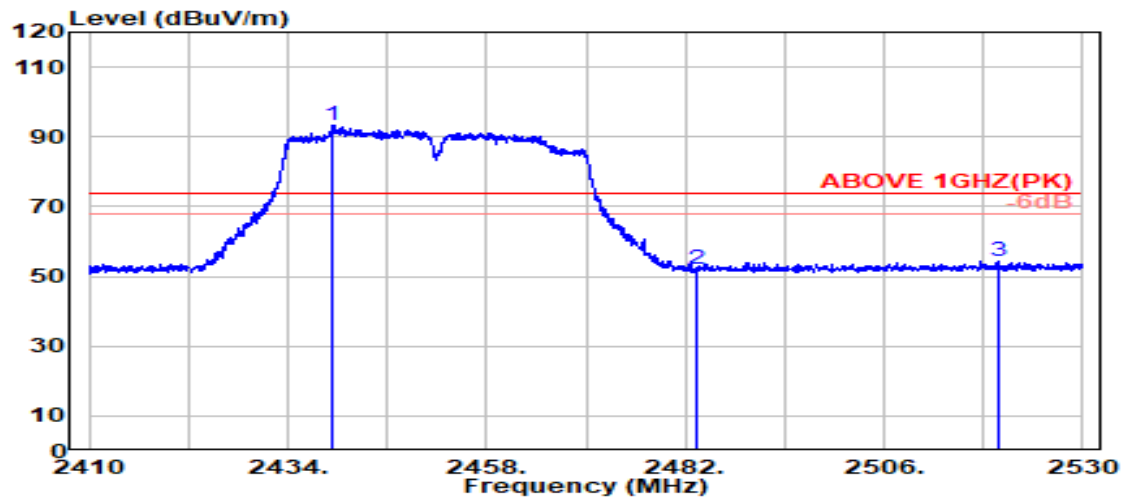

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2439.500	28.26	5.78	39.87	99.20	93.37	---	---	Peak
2483.500	28.37	5.83	39.87	57.94	52.27	74.00	21.73	Peak
2519.750	28.52	5.87	39.88	59.75	54.27	74.00	19.73	Peak

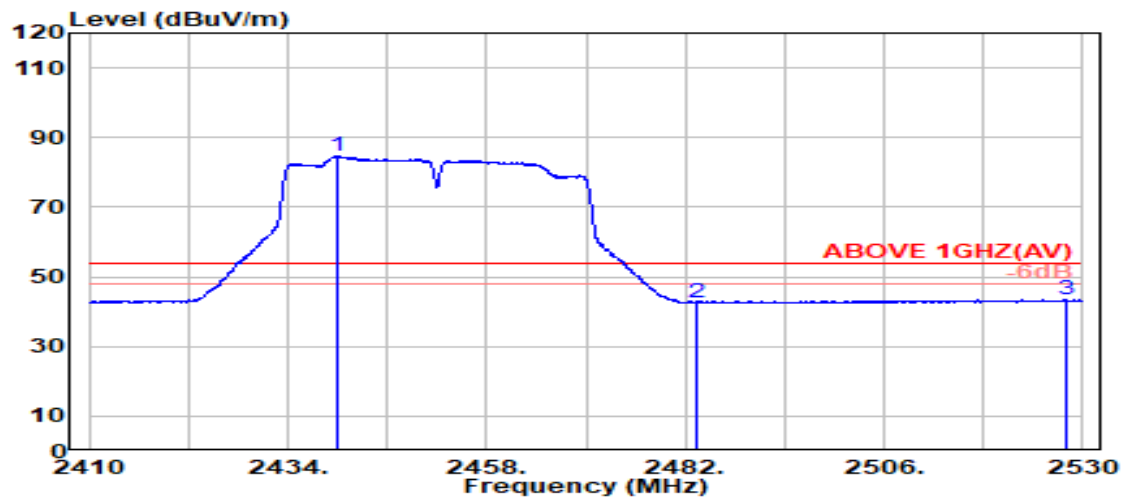

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.100	28.26	5.78	39.87	90.52	84.69	---	---	Average
2483.500	28.37	5.83	39.87	48.26	42.59	54.00	11.41	Average
2528.150	28.57	5.88	39.88	48.80	43.38	54.00	10.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

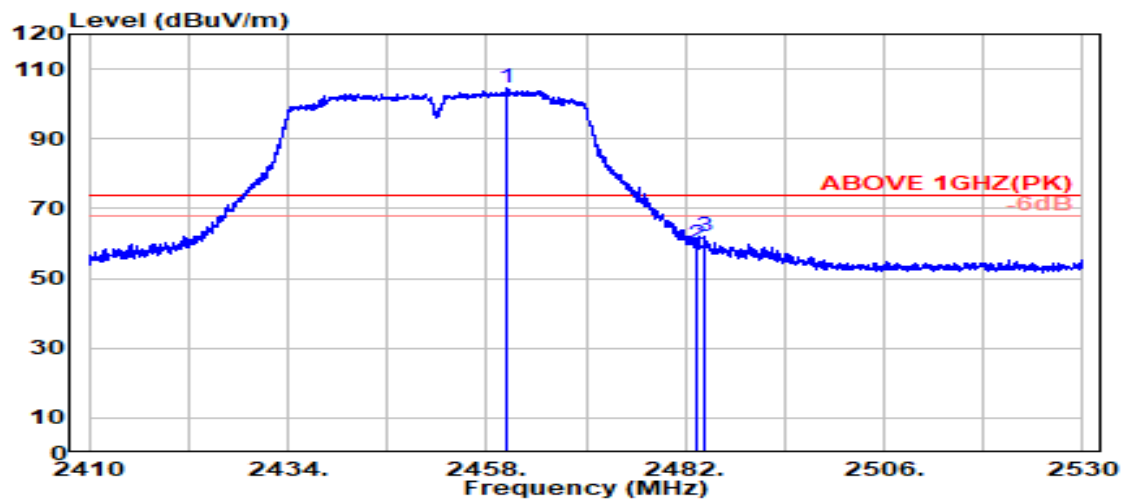

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.450	28.32	5.80	39.87	110.24	104.49	---	---	Peak
2483.500	28.37	5.83	39.87	65.42	59.75	74.00	14.25	Peak
2484.350	28.37	5.83	39.87	67.80	62.13	74.00	11.87	Peak

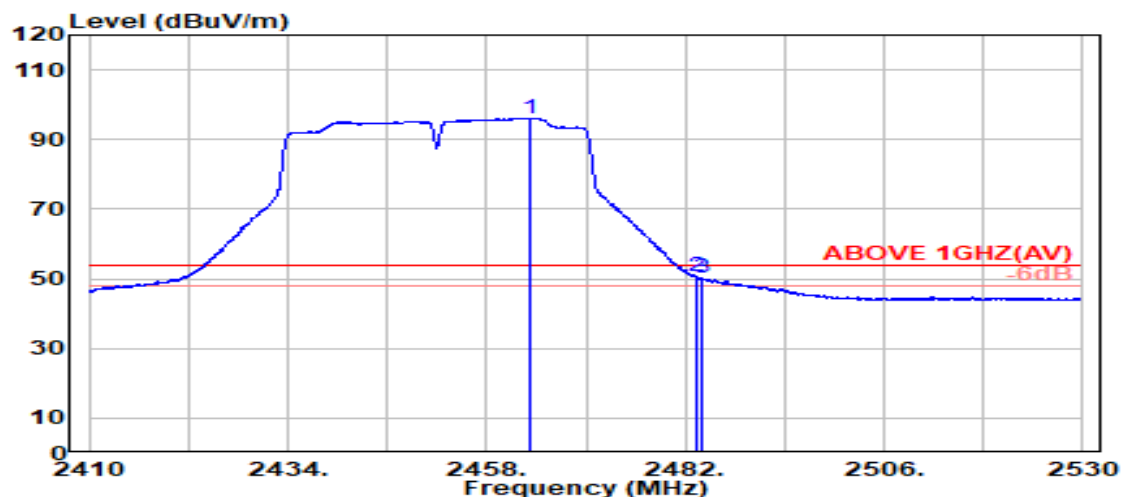

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	28.33	5.81	39.87	101.89	96.15	---	---	Average
2483.500	28.37	5.83	39.87	56.32	50.65	54.00	3.35	Average
2483.900	28.37	5.83	39.87	56.05	50.38	54.00	3.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

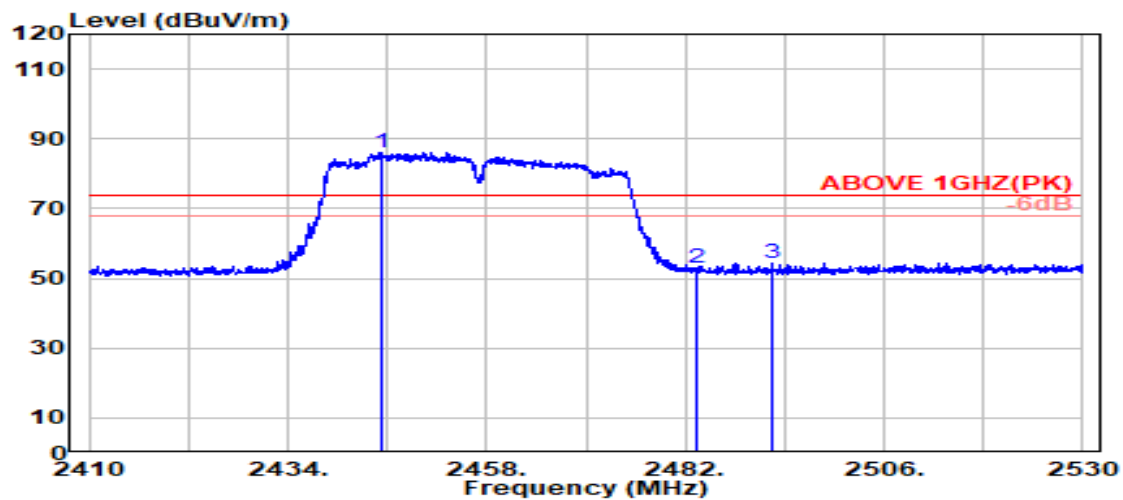

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.250	28.28	5.79	39.87	91.88	86.08	---	---	Peak
2483.500	28.37	5.83	39.87	58.46	52.79	74.00	21.21	Peak
2492.450	28.39	5.84	39.87	60.20	54.56	74.00	19.44	Peak

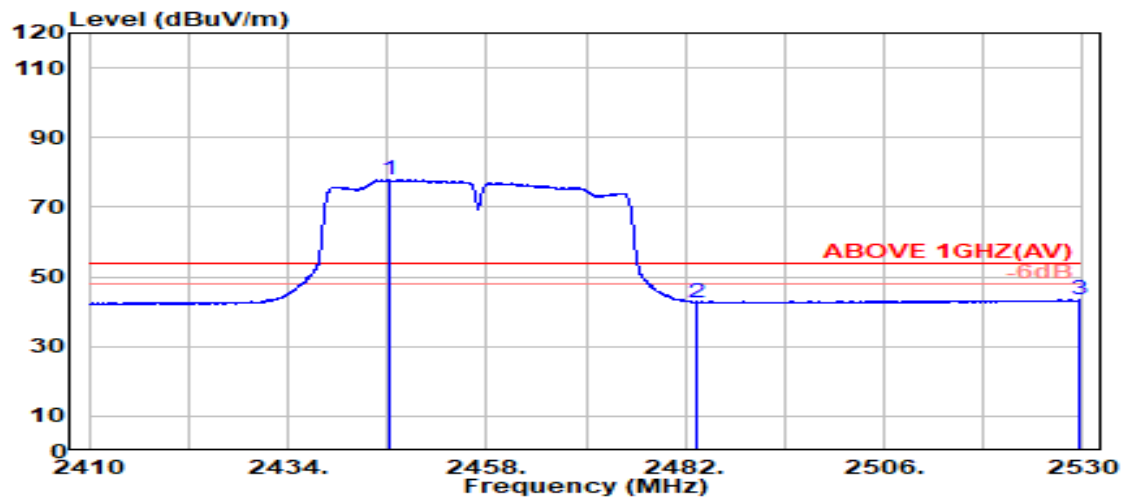


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.350	28.29	5.79	39.87	83.55	77.75	---	---	Average
2483.500	28.37	5.83	39.87	48.27	42.60	54.00	11.40	Average
2529.450	28.58	5.89	39.88	48.79	43.38	54.00	10.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

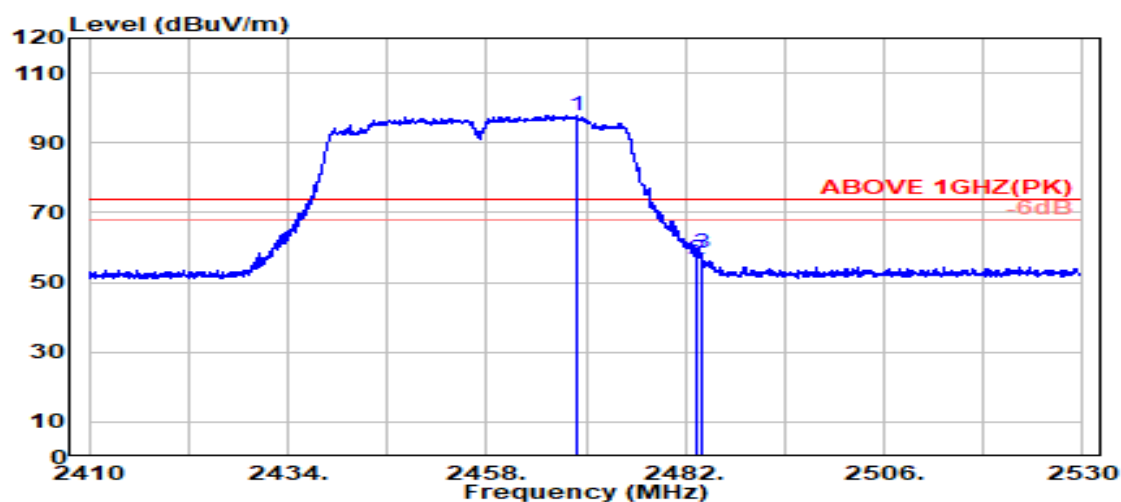

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.050	28.34	5.81	39.87	103.69	97.97	---	---	Peak
	2483.500	28.37	5.83	39.87	62.34	56.67	74.00	17.33	Peak
	2484.050	28.37	5.83	39.87	64.09	58.42	74.00	15.58	Peak

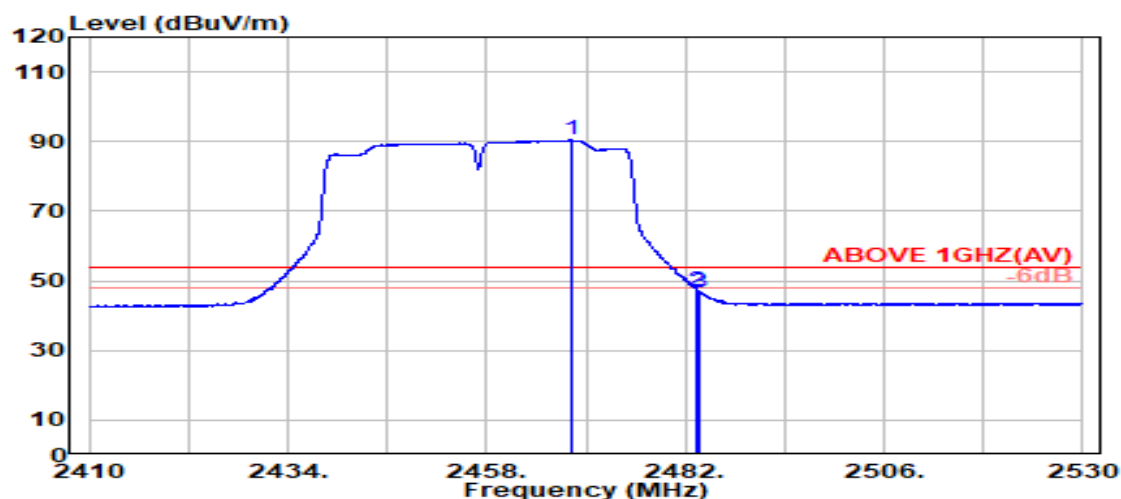

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.150	28.34	5.81	39.87	96.29	90.57	---	---	Average
	2483.500	28.37	5.83	39.87	52.94	47.27	54.00	6.73	Average
	2483.700	28.37	5.83	39.87	52.49	46.82	54.00	7.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

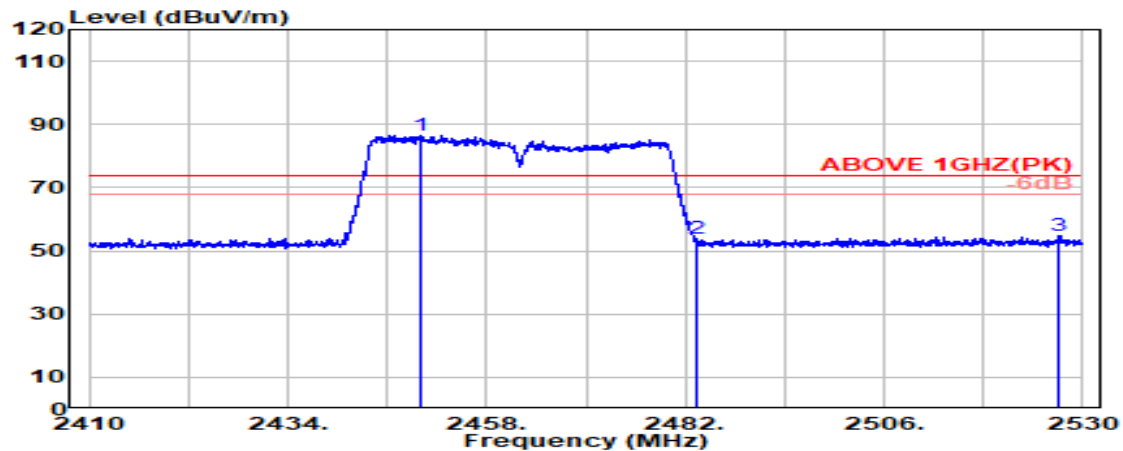

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.950	28.30	5.79	39.87	92.45	86.66	---	---	Peak
2483.500	28.37	5.83	39.87	59.40	53.73	74.00	20.27	Peak
2527.050	28.56	5.88	39.88	60.05	54.62	74.00	19.38	Peak

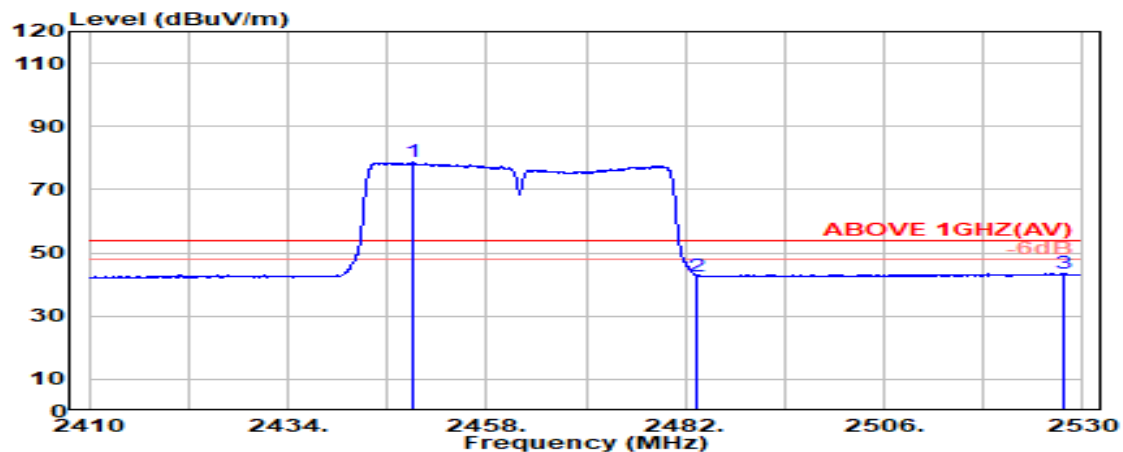

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.250	28.30	5.79	39.87	84.44	78.65	---	---	Average
2483.500	28.37	5.83	39.87	48.43	42.76	54.00	11.24	Average
2527.750	28.57	5.88	39.88	48.87	43.44	54.00	10.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

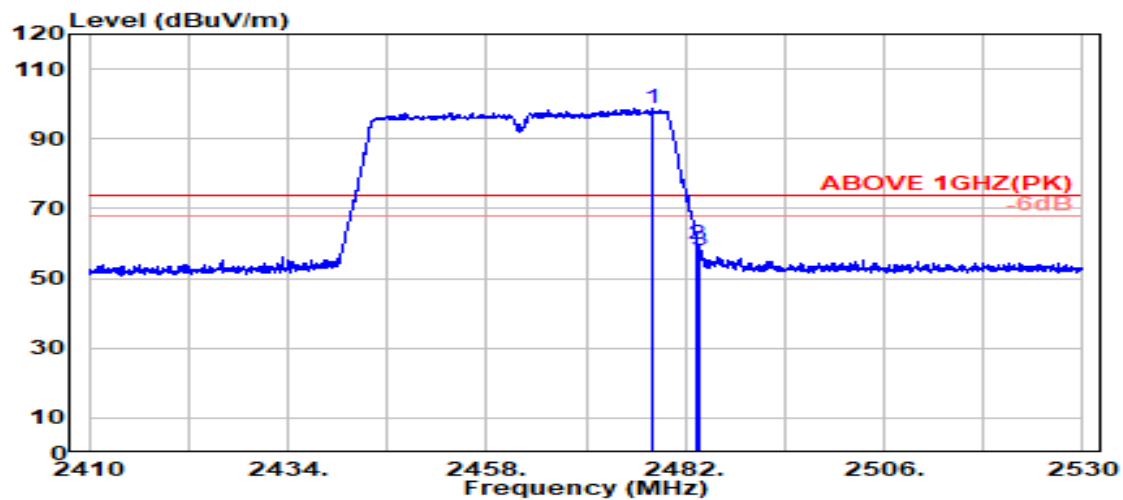

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.950	28.36	5.82	39.87	104.45	98.76	---	---	Peak
2483.500	28.37	5.83	39.87	65.60	59.92	74.00	14.08	Peak
2483.700	28.37	5.83	39.87	63.47	57.80	74.00	16.20	Peak

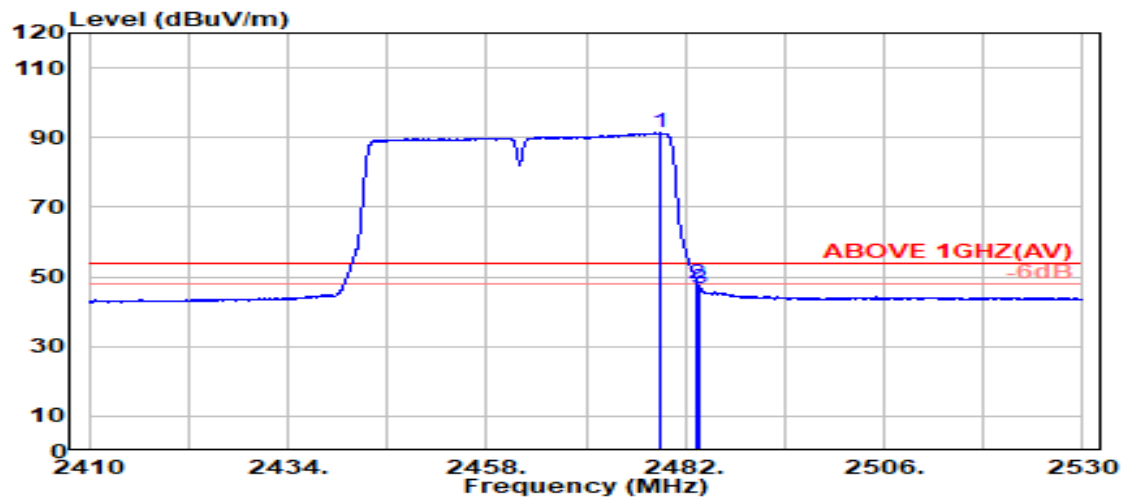

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.36	5.83	39.87	97.02	91.34	---	---	Average
2483.500	28.37	5.83	39.87	53.66	47.99	54.00	6.01	Average
2483.700	28.37	5.83	39.87	52.40	46.73	54.00	7.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

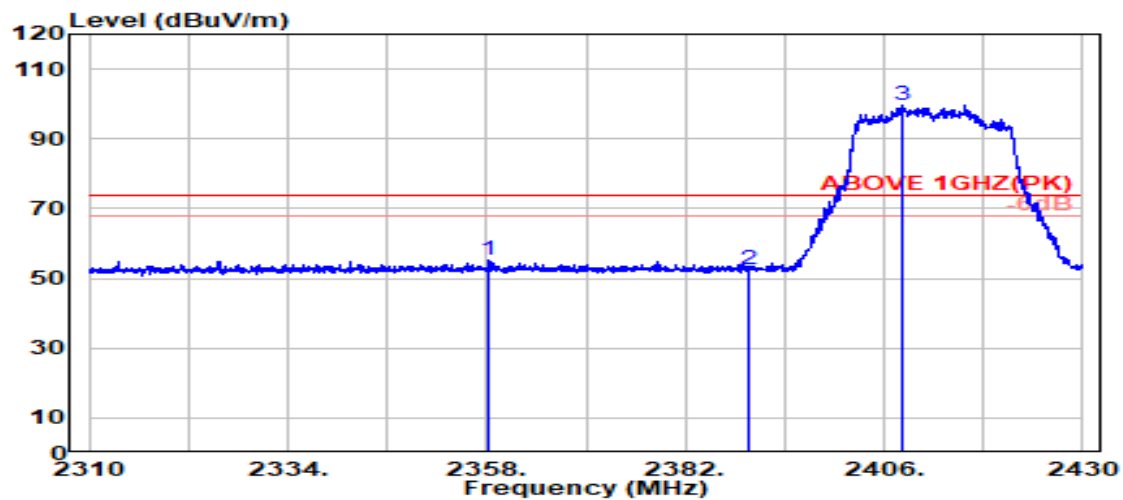

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.350	28.27	5.68	39.88	61.30	55.37	74.00	18.63	Peak
2389.800	28.14	5.72	39.88	58.53	52.51	74.00	21.49	Peak
@ 2408.100	28.13	5.74	39.88	105.75	99.75	---	---	Peak

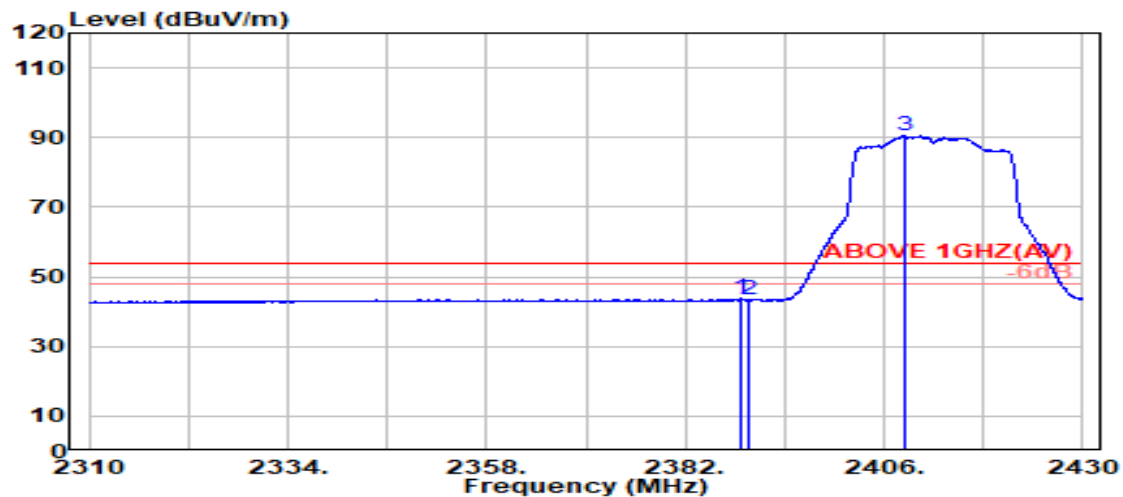

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	49.75	43.74	54.00	10.26	Average
2389.800	28.14	5.72	39.88	49.45	43.43	54.00	10.57	Average
@ 2408.400	28.13	5.74	39.88	96.44	90.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

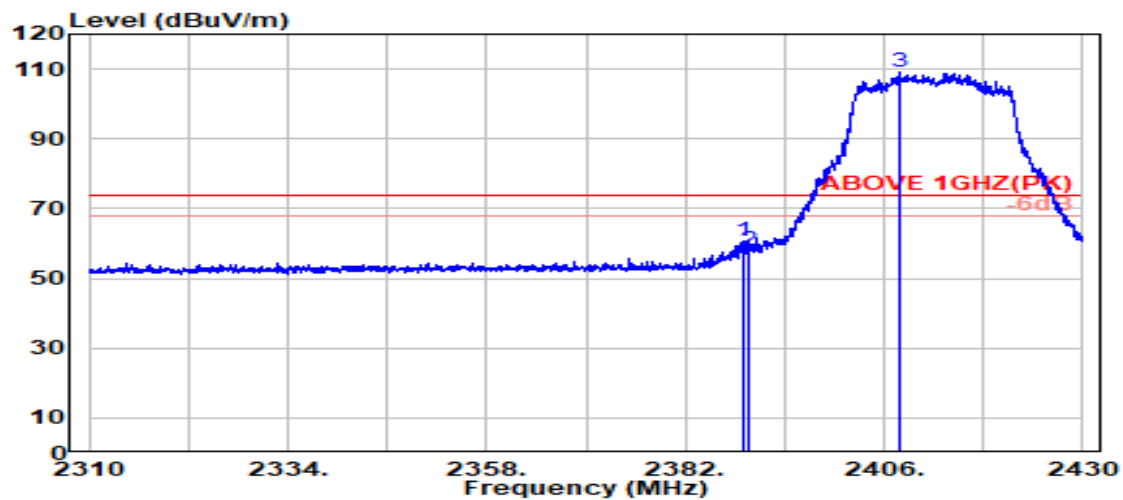

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	66.57	60.55	74.00	13.45	Peak
2389.800	28.14	5.72	39.88	63.96	57.94	74.00	16.06	Peak
@ 2407.800	28.13	5.74	39.88	114.93	108.93	---	---	Peak

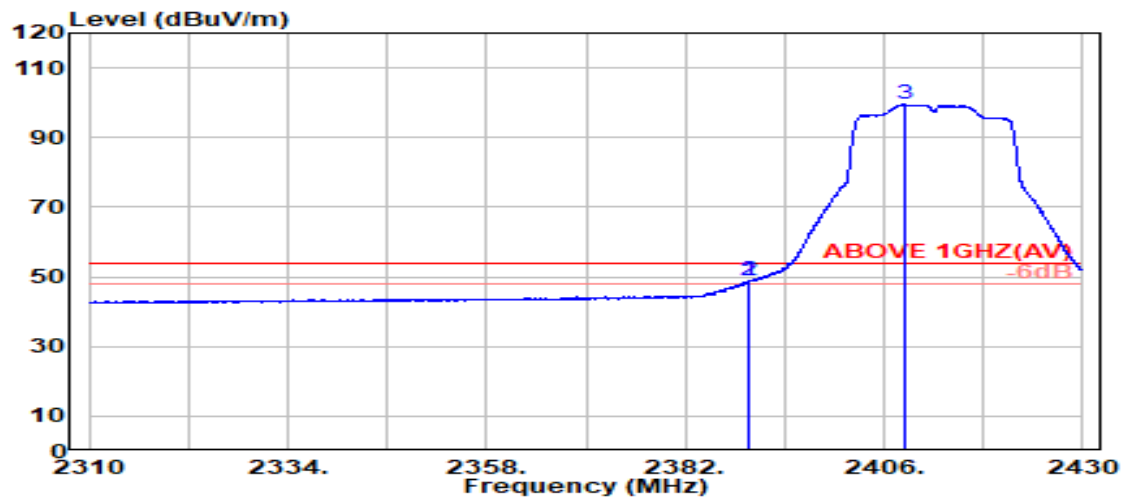

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	54.74	48.72	54.00	5.28	Average
2389.800	28.14	5.72	39.88	54.73	48.71	54.00	5.29	Average
@ 2408.450	28.13	5.74	39.88	105.49	99.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

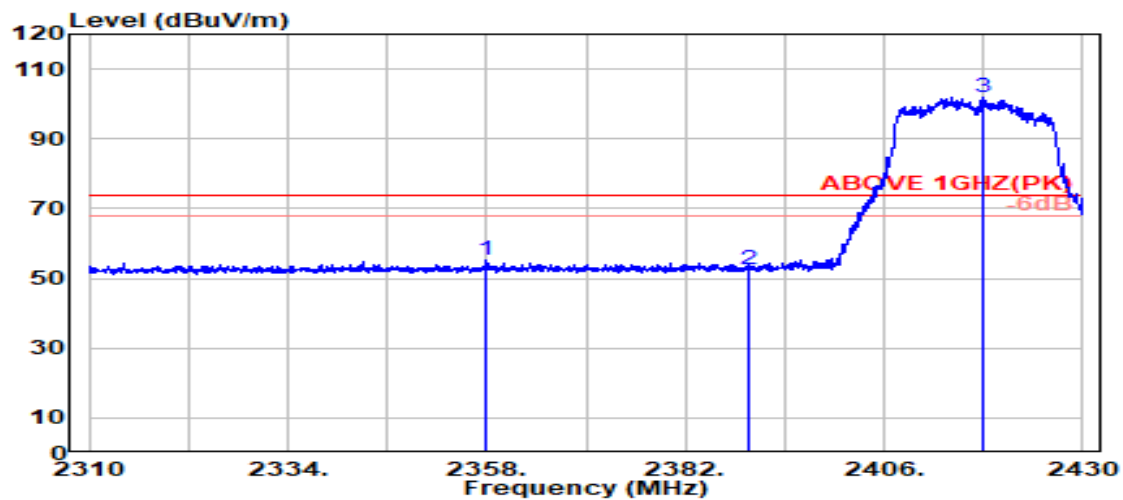

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.050	28.27	5.68	39.88	61.19	55.26	74.00	18.74	Peak
2389.800	28.14	5.72	39.88	58.49	52.48	74.00	21.52	Peak
@ 2417.950	28.17	5.75	39.88	107.94	102.00	---	---	Peak

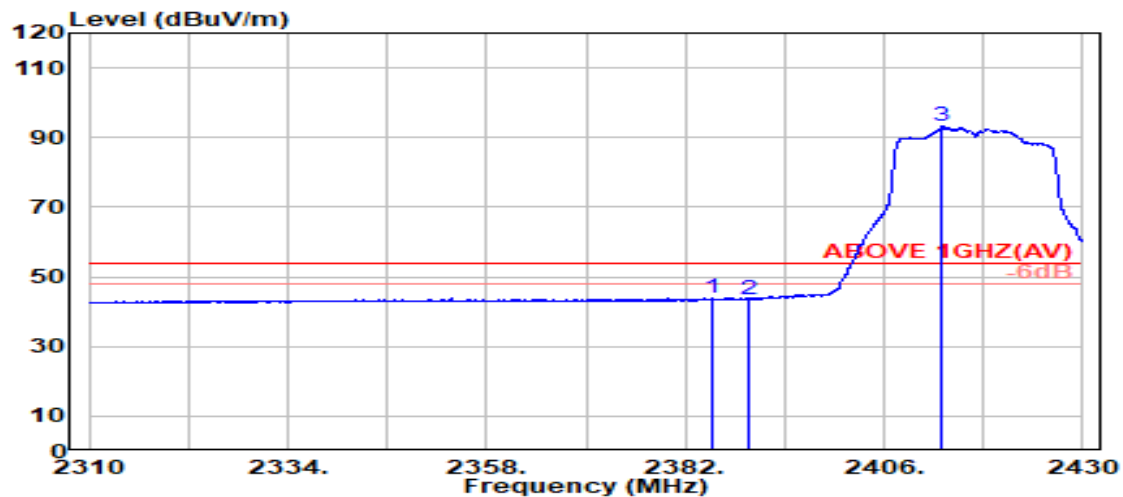

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.350	28.16	5.72	39.88	49.96	43.95	54.00	10.05	Average
2389.800	28.14	5.72	39.88	49.54	43.52	54.00	10.48	Average
@ 2413.050	28.15	5.75	39.88	99.17	93.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

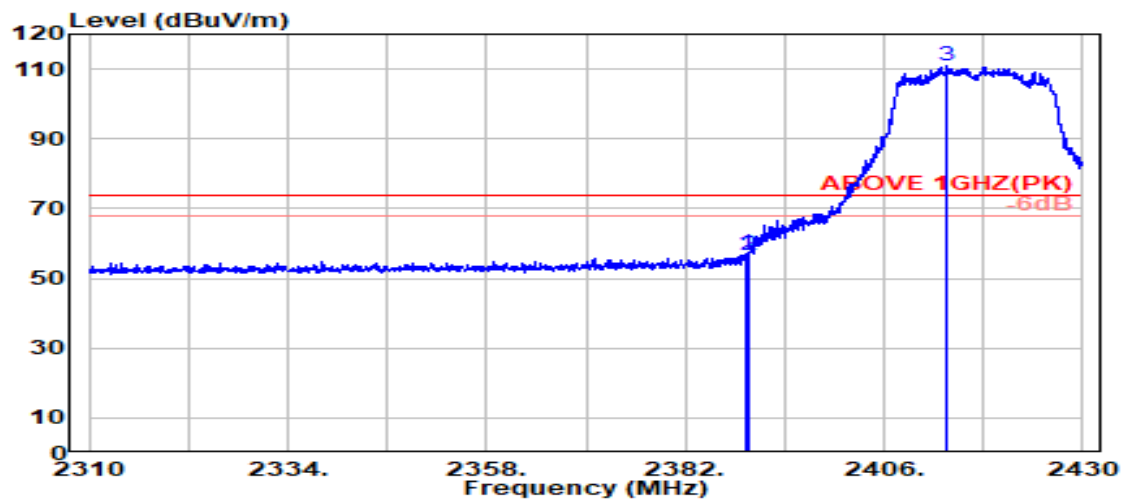

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	63.00	56.99	74.00	17.01	Peak
2389.800	28.14	5.72	39.88	62.84	56.83	74.00	17.17	Peak
@ 2413.500	28.15	5.75	39.88	117.09	111.11	---	---	Peak

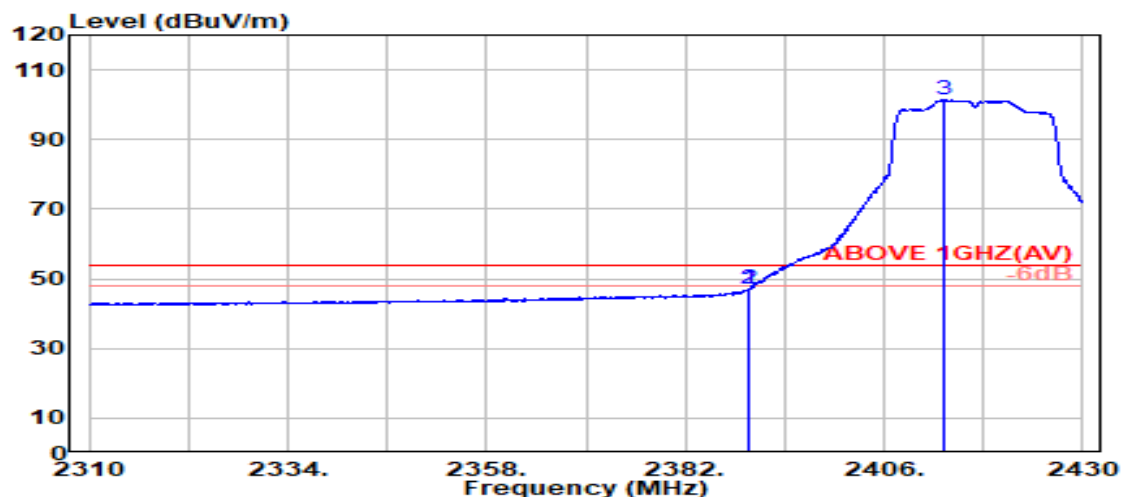

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	53.18	47.16	54.00	6.84	Average
2389.800	28.14	5.72	39.88	53.27	47.25	54.00	6.75	Average
@ 2413.200	28.15	5.75	39.88	107.30	101.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

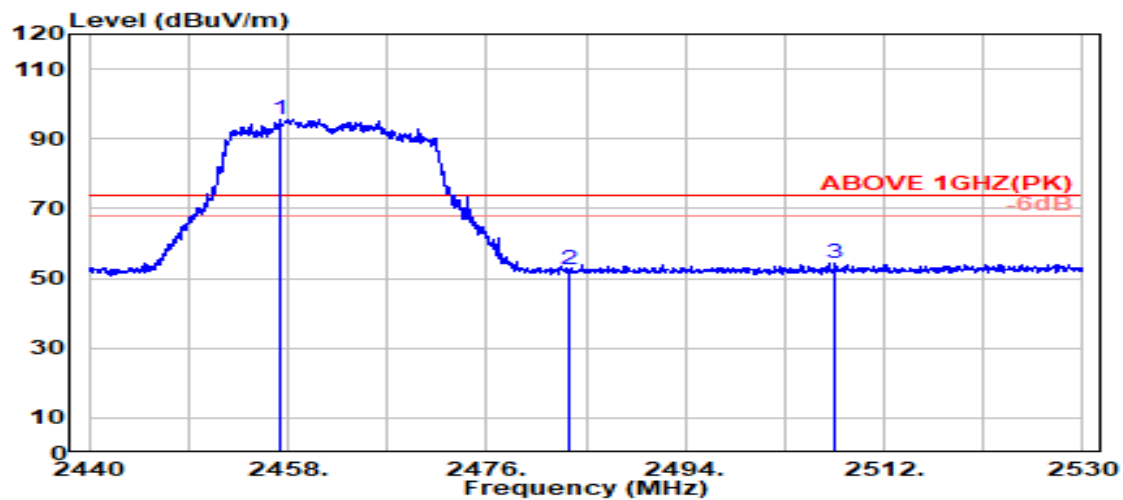

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.250	28.31	5.80	39.87	101.51	95.75	---	---	Peak
2483.500	28.37	5.83	39.87	58.03	52.36	74.00	21.64	Peak
2507.550	28.45	5.86	39.87	59.82	54.25	74.00	19.75	Peak

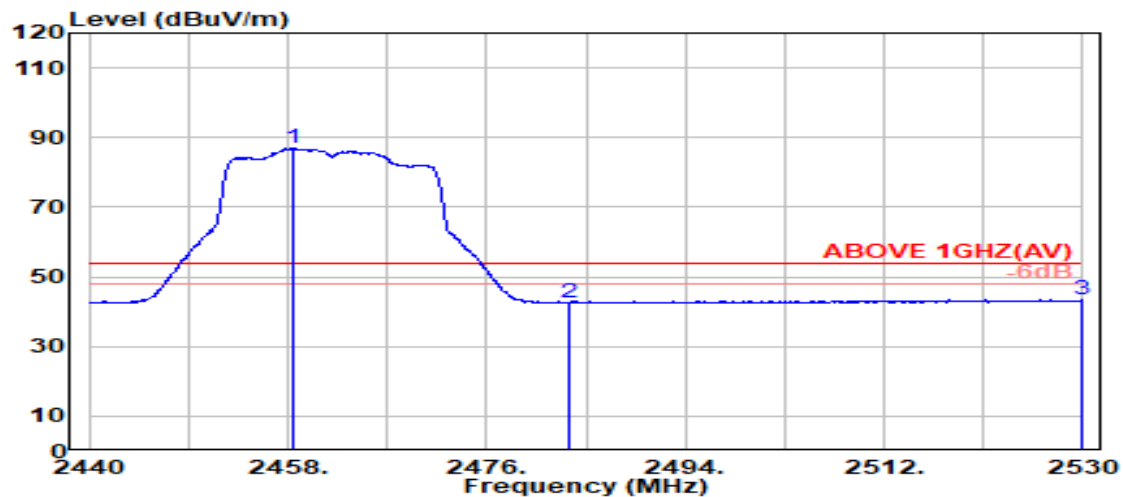

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.450	28.32	5.80	39.87	92.58	86.83	---	---	Average
2483.500	28.37	5.83	39.87	48.30	42.62	54.00	11.38	Average
2529.900	28.58	5.89	39.88	48.70	43.29	54.00	10.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

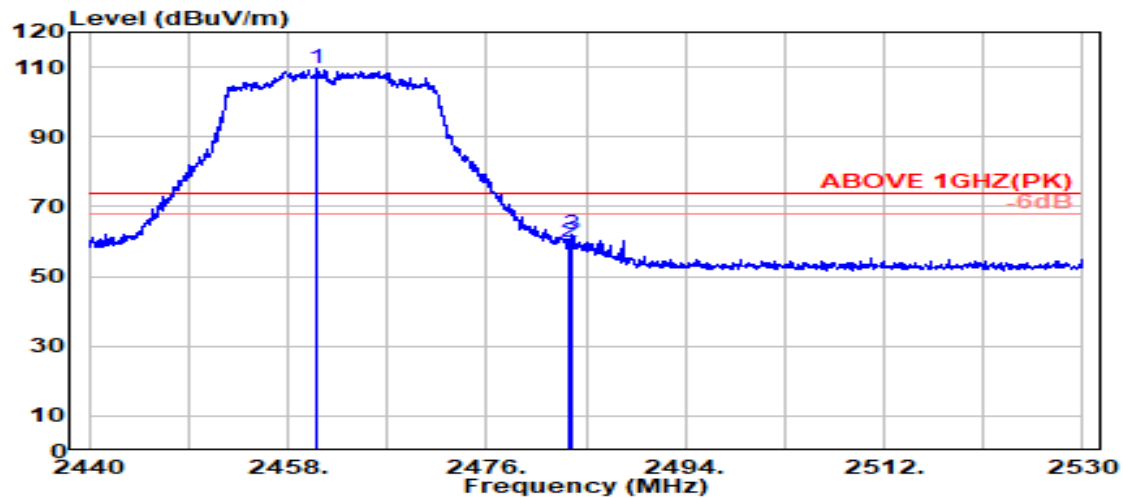

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.550	28.32	5.80	39.87	115.19	109.45	---	---	Peak
2483.500	28.37	5.83	39.87	65.39	59.72	74.00	14.28	Peak
2483.800	28.37	5.83	39.87	67.55	61.87	74.00	12.13	Peak

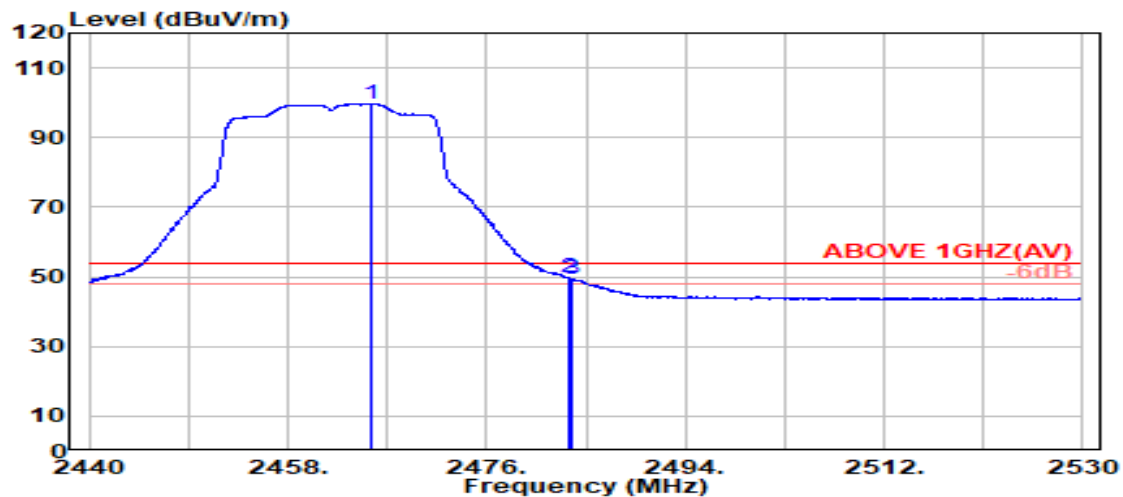

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.650	28.33	5.81	39.87	105.36	99.63	---	---	Average
2483.500	28.37	5.83	39.87	55.41	49.74	54.00	4.26	Average
2483.750	28.37	5.83	39.87	55.19	49.52	54.00	4.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

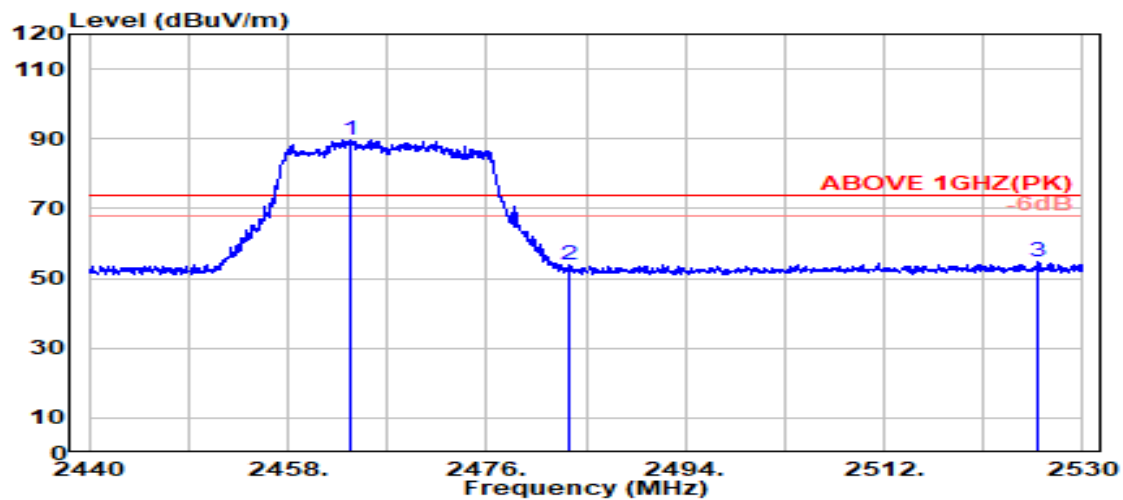

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.750	28.33	5.81	39.87	95.36	89.62	---	---	Peak
2483.500	28.37	5.83	39.87	59.39	53.72	74.00	20.28	Peak
2526.000	28.56	5.88	39.88	60.09	54.65	74.00	19.35	Peak

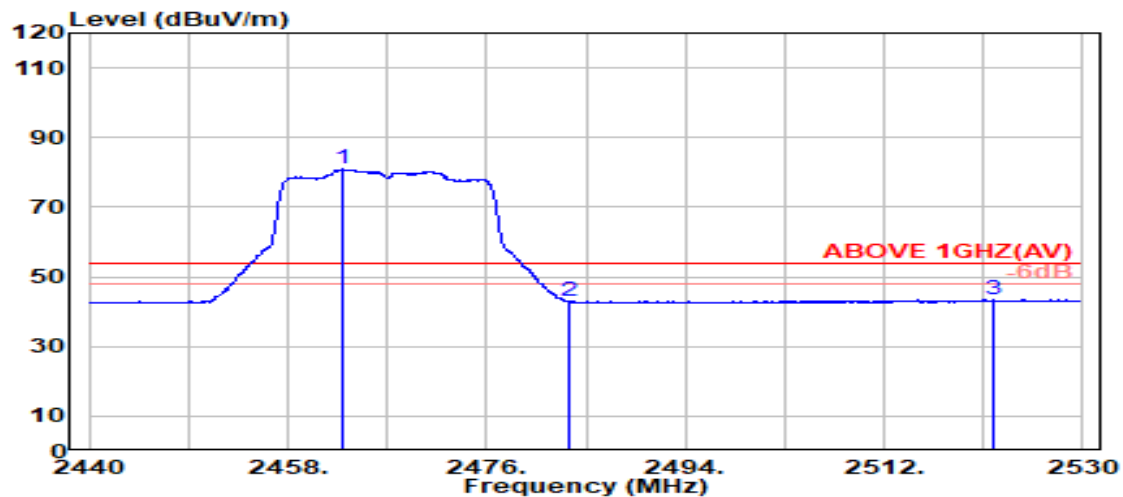

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.950	28.33	5.81	39.87	86.84	81.10	---	---	Average
2483.500	28.37	5.83	39.87	48.52	42.85	54.00	11.15	Average
2521.900	28.53	5.88	39.88	48.85	43.38	54.00	10.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

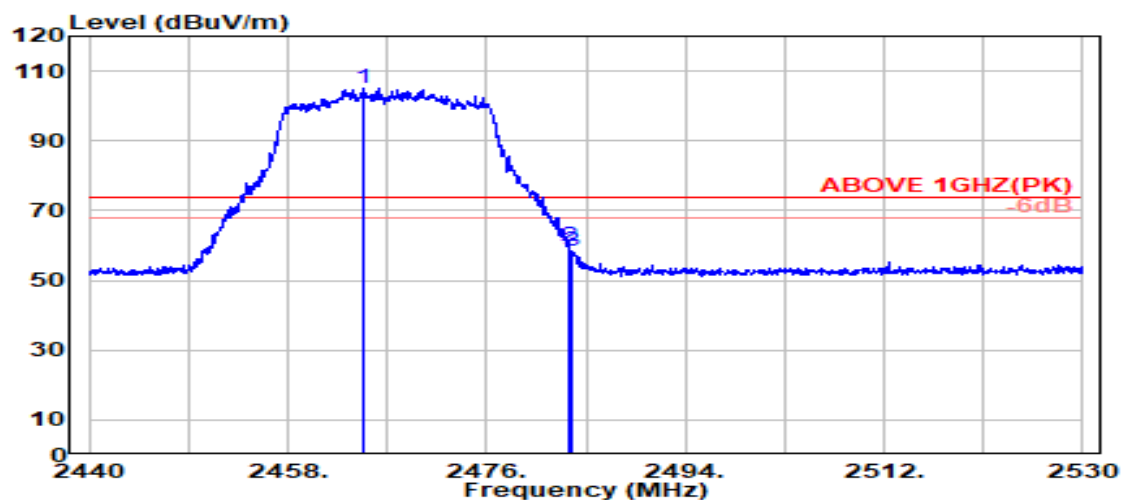

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.33	5.81	39.87	110.94	105.21	---	---	Peak
2483.500	28.37	5.83	39.87	65.54	59.87	74.00	14.13	Peak
2483.700	28.37	5.83	39.87	64.19	58.52	74.00	15.48	Peak

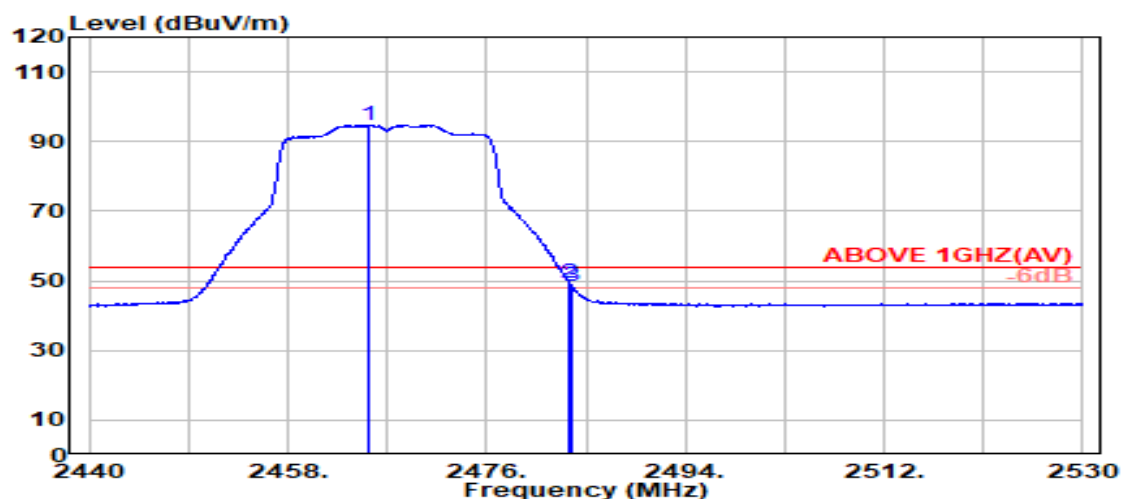

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.33	5.81	39.87	100.40	94.67	---	---	Average
2483.500	28.37	5.83	39.87	55.11	49.44	54.00	4.56	Average
2483.700	28.37	5.83	39.87	54.17	48.49	54.00	5.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

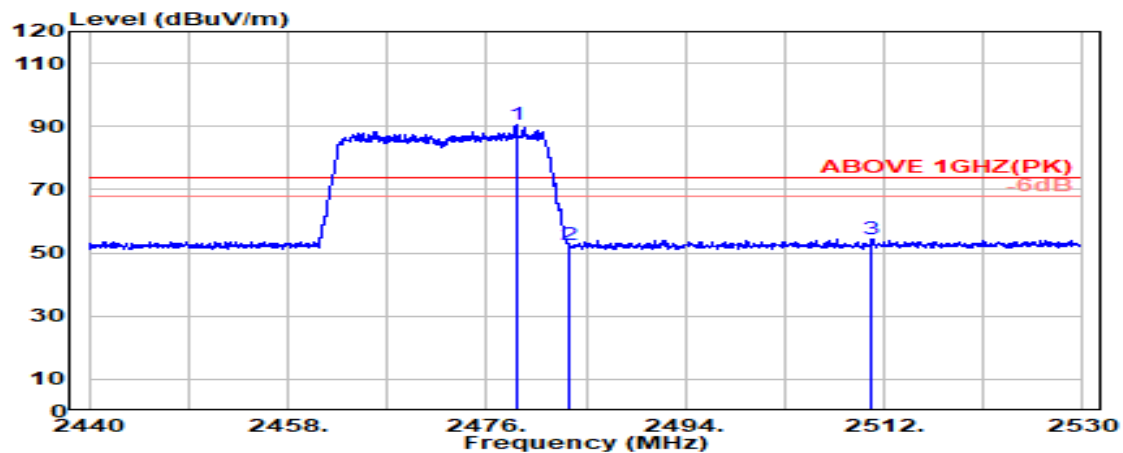

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.650	28.36	5.83	39.87	96.34	90.65	---	---	Peak
2483.500	28.37	5.83	39.87	58.24	52.57	74.00	21.43	Peak
2510.900	28.47	5.86	39.87	60.05	54.51	74.00	19.49	Peak

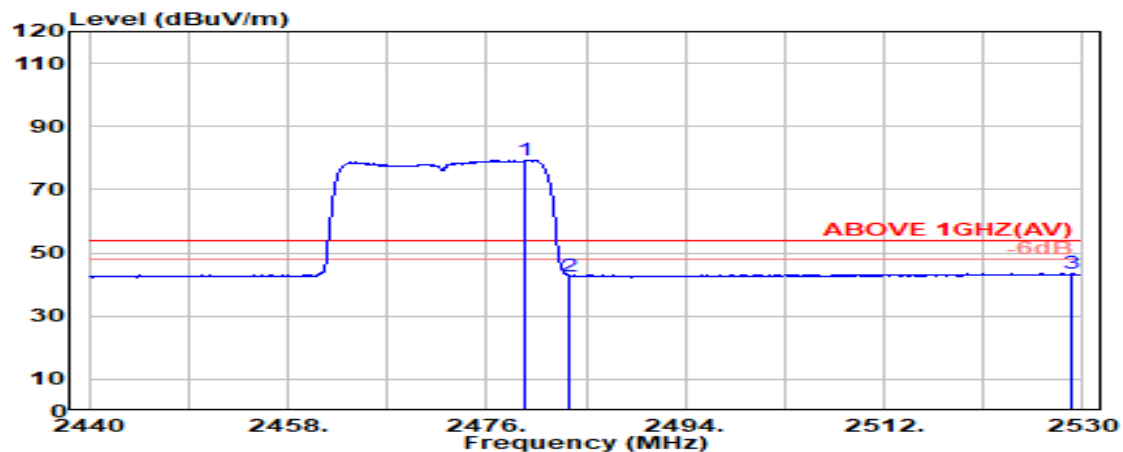

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.36	5.83	39.87	84.94	79.26	---	---	Average
2483.500	28.37	5.83	39.87	48.44	42.77	54.00	11.23	Average
2529.000	28.57	5.89	39.88	48.78	43.36	54.00	10.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

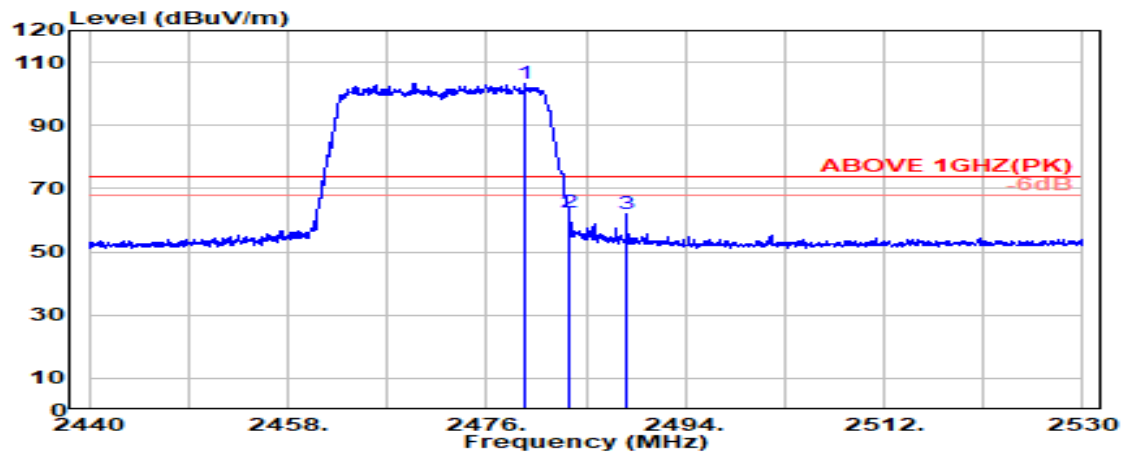

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.400	28.36	5.83	39.87	109.00	103.31	---	---	Peak
2483.500	28.37	5.83	39.87	68.27	62.59	74.00	11.41	Peak
2488.700	28.38	5.84	39.87	67.48	61.82	74.00	12.18	Peak

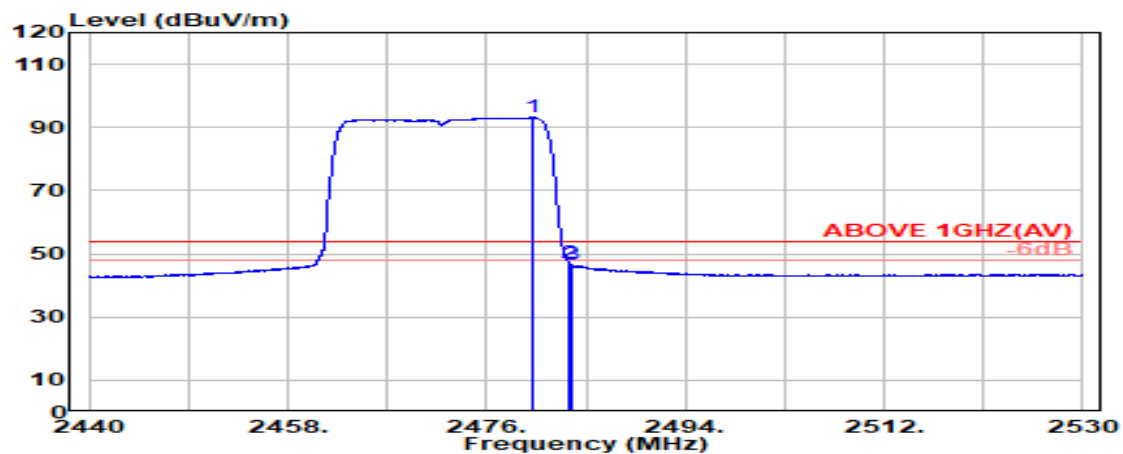

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.250	28.36	5.83	39.87	98.83	93.14	---	---	Average
2483.500	28.37	5.83	39.87	52.68	47.01	54.00	6.99	Average
2483.700	28.37	5.83	39.87	52.15	46.48	54.00	7.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

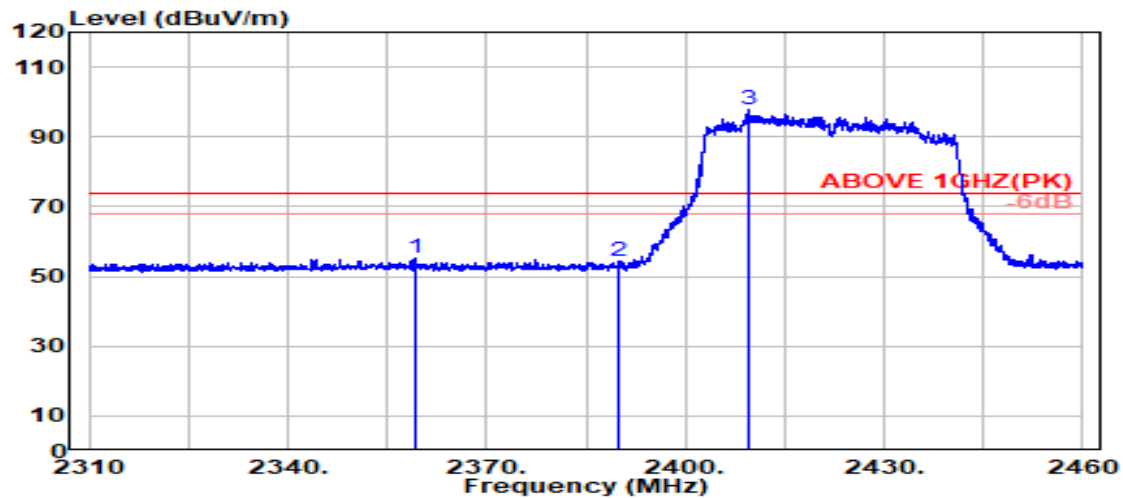

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2359.250	28.26	5.68	39.88	60.98	55.04	74.00	18.96	Peak
2389.800	28.14	5.72	39.88	60.40	54.39	74.00	19.61	Peak
@ 2409.450	28.14	5.74	39.88	103.74	97.75	---	---	Peak

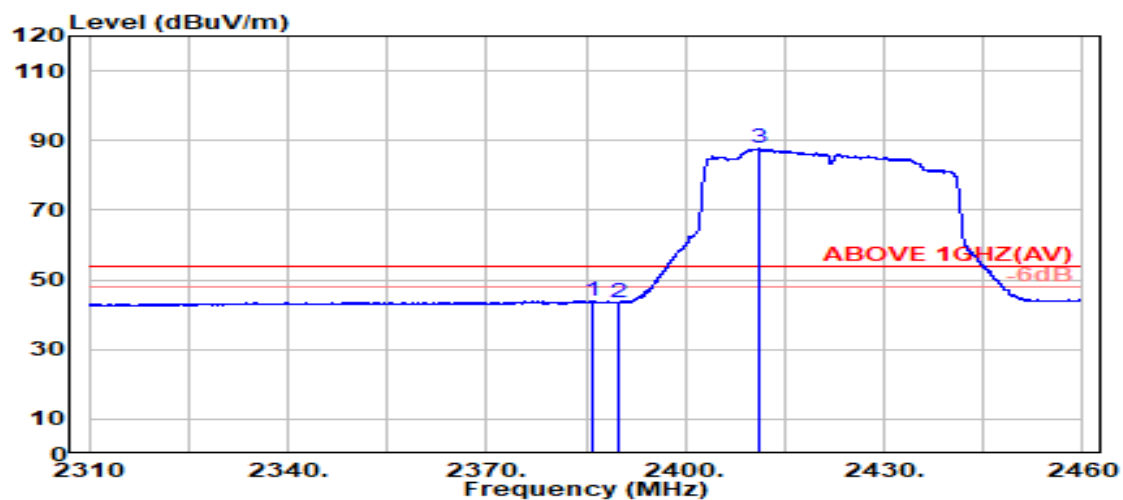

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.050	28.16	5.72	39.88	50.00	43.99	54.00	10.01	Average
2389.800	28.14	5.72	39.88	49.35	43.33	54.00	10.67	Average
@ 2411.200	28.15	5.75	39.88	93.77	87.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

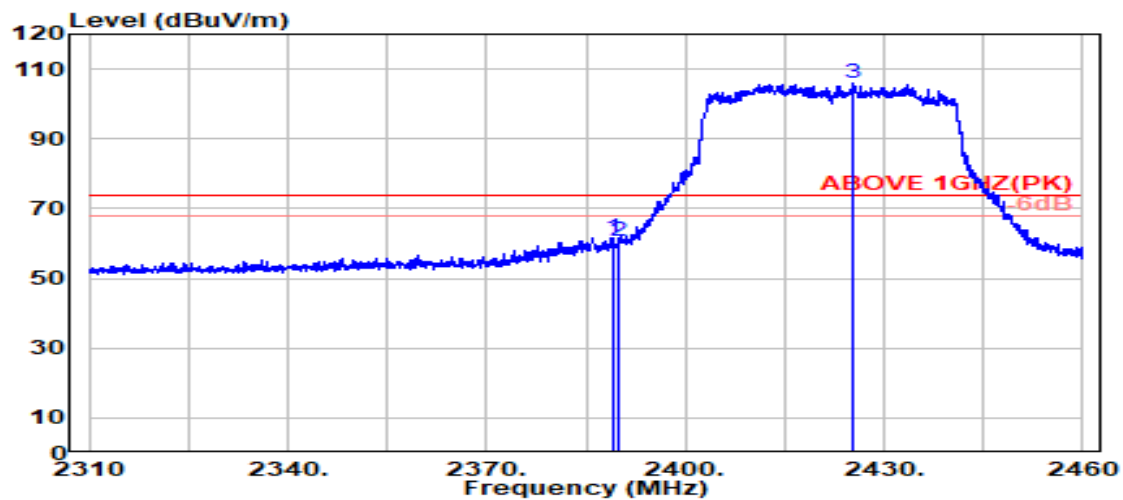

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	67.67	61.65	74.00	12.35	Peak
2389.800	28.14	5.72	39.88	66.84	60.83	74.00	13.17	Peak
@ 2425.200	28.20	5.76	39.88	111.65	105.74	---	---	Peak

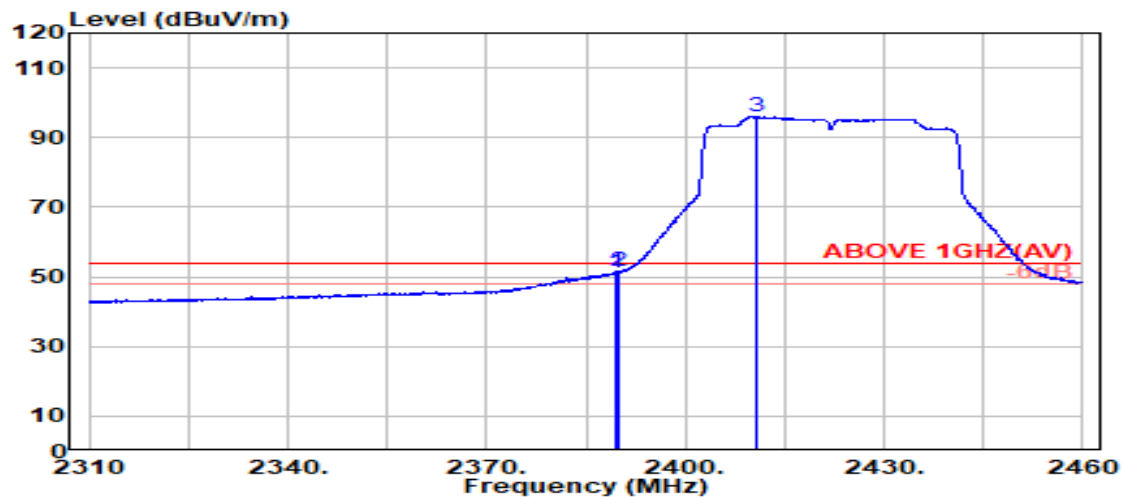

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	57.35	51.34	54.00	2.66	Average
2389.800	28.14	5.72	39.88	57.52	51.50	54.00	2.50	Average
@ 2410.850	28.14	5.75	39.88	102.05	96.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

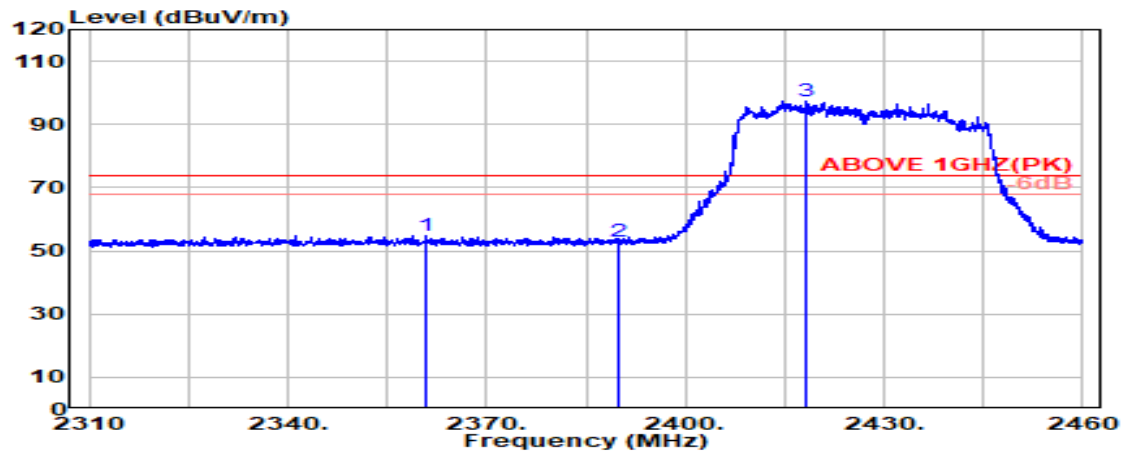

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2360.950	28.26	5.69	39.88	60.81	54.88	74.00	19.12	Peak
2389.800	28.14	5.72	39.88	58.89	52.88	74.00	21.12	Peak
@ 2418.350	28.17	5.75	39.88	103.46	97.51	---	---	Peak

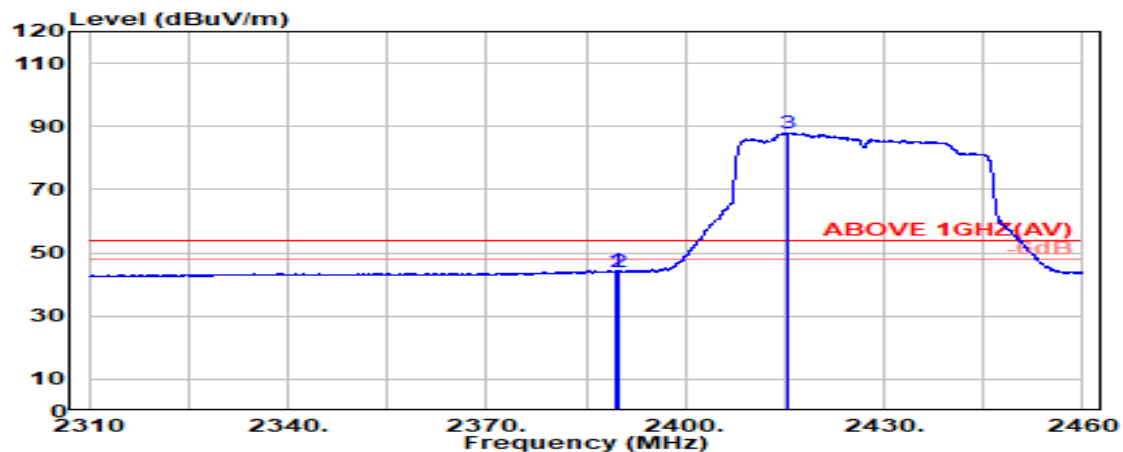

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.41	44.39	54.00	9.61	Average
2389.800	28.14	5.72	39.88	49.98	43.97	54.00	10.03	Average
@ 2415.400	28.16	5.75	39.88	93.99	88.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

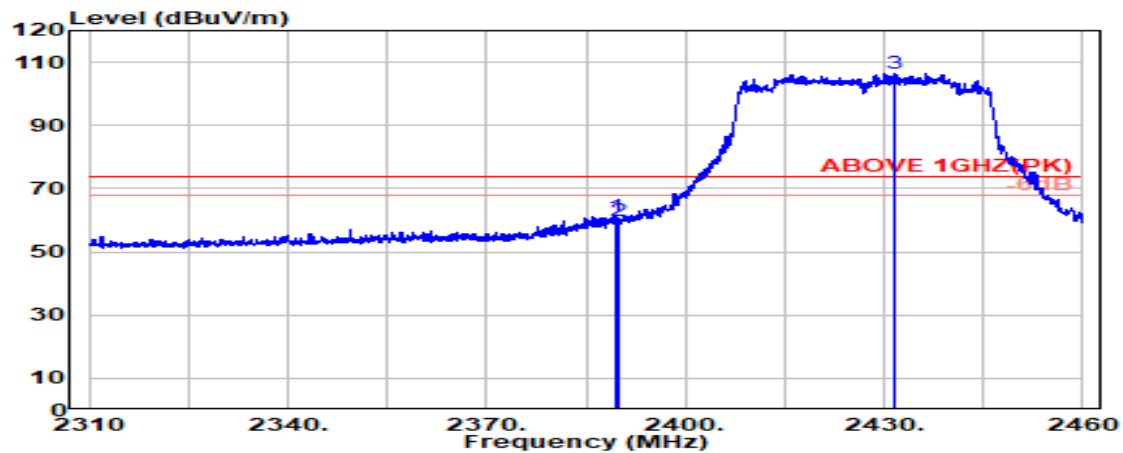

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	67.15	61.13	74.00	12.87	Peak
2389.800	28.14	5.72	39.88	65.75	59.74	74.00	14.26	Peak
@ 2431.750	28.23	5.77	39.87	112.45	106.57	---	---	Peak

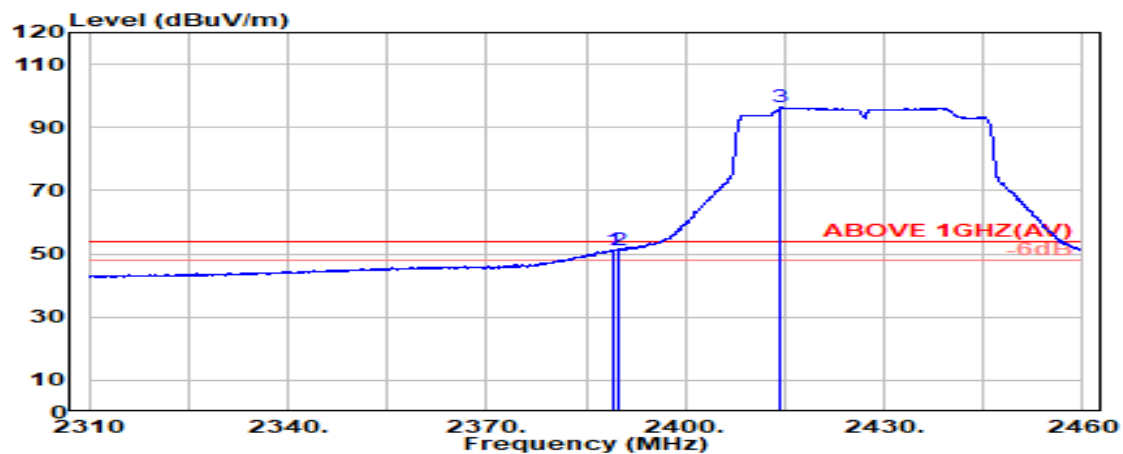

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.14	5.72	39.88	57.17	51.15	54.00	2.85	Average
2389.800	28.14	5.72	39.88	57.31	51.30	54.00	2.70	Average
@ 2414.450	28.16	5.75	39.88	102.32	96.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

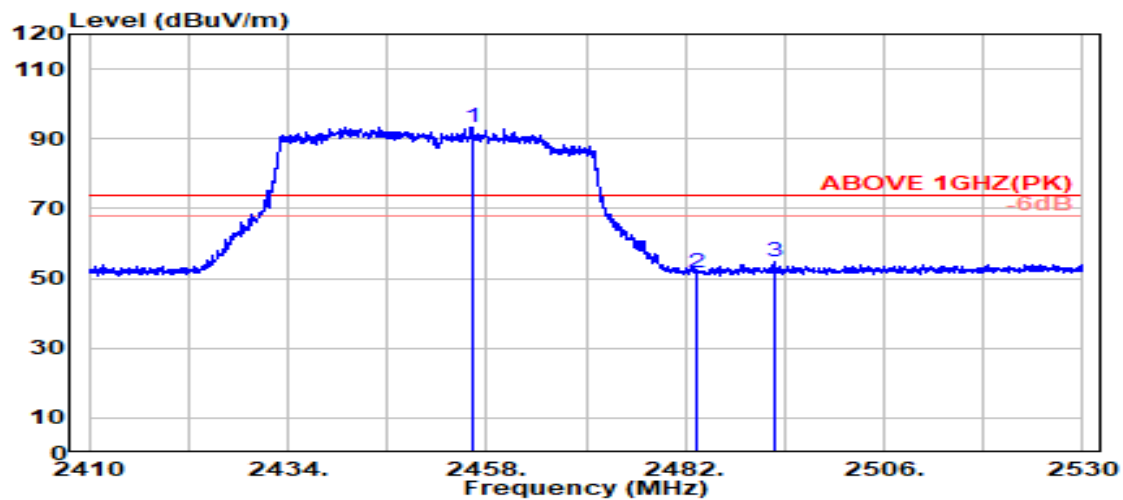

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.200	28.31	5.80	39.87	99.25	93.49	---	---	Peak
2483.500	28.37	5.83	39.87	57.48	51.80	74.00	22.20	Peak
2492.650	28.39	5.84	39.87	60.26	54.62	74.00	19.38	Peak

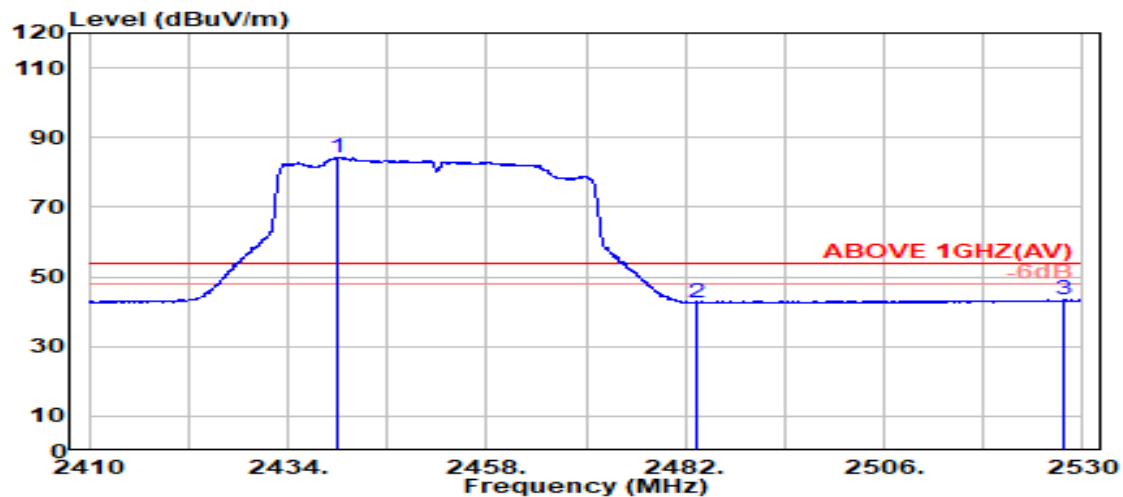

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2439.950	28.26	5.78	39.87	90.24	84.40	---	---	Average
2483.500	28.37	5.83	39.87	48.29	42.62	54.00	11.38	Average
2527.650	28.57	5.88	39.88	48.87	43.44	54.00	10.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

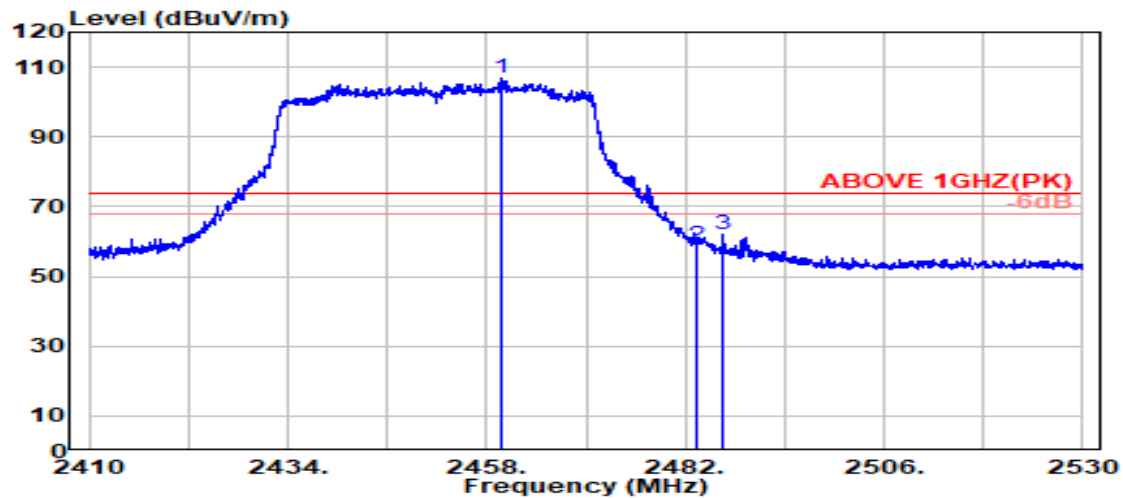

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.900	28.32	5.80	39.87	112.68	106.94	---	---	Peak
2483.500	28.37	5.83	39.87	64.38	58.70	74.00	15.30	Peak
2486.500	28.37	5.83	39.87	67.48	61.82	74.00	12.18	Peak

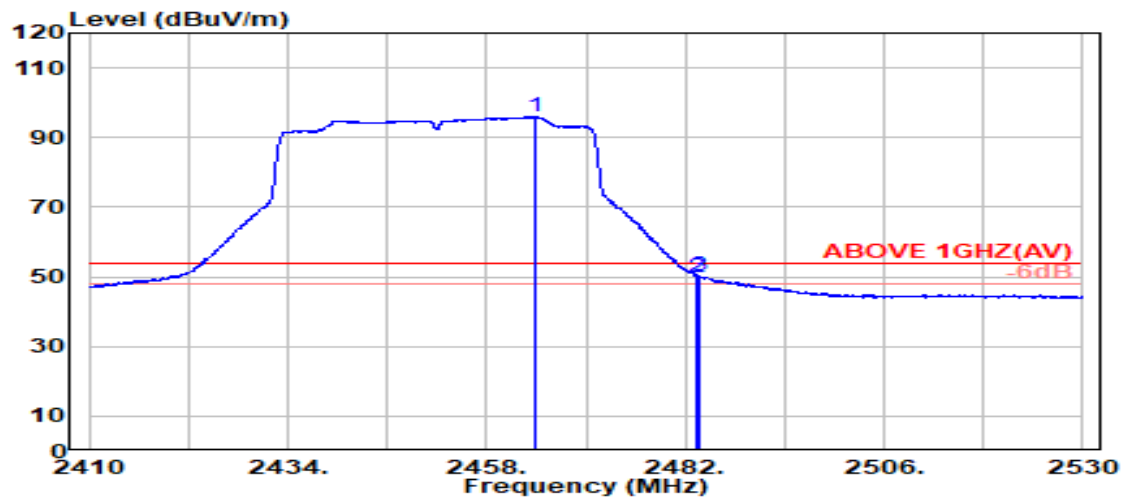

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.750	28.33	5.81	39.87	101.66	95.92	---	---	Average
2483.500	28.37	5.83	39.87	55.67	50.00	54.00	4.00	Average
2483.700	28.37	5.83	39.87	55.94	50.26	54.00	3.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

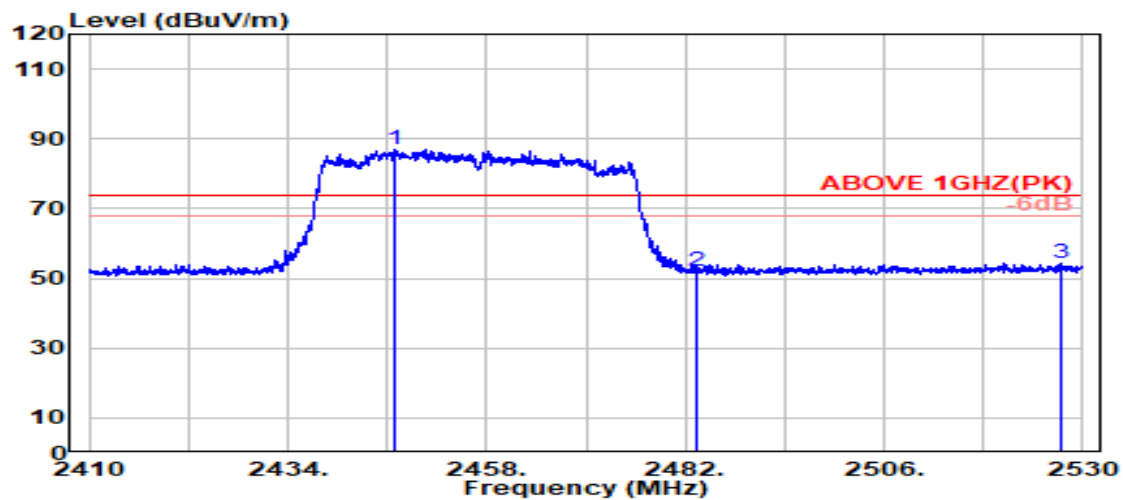

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.850	28.29	5.79	39.87	92.86	87.06	---	---	Peak
2483.500	28.37	5.83	39.87	57.59	51.92	74.00	22.08	Peak
2527.500	28.57	5.88	39.88	59.86	54.43	74.00	19.57	Peak

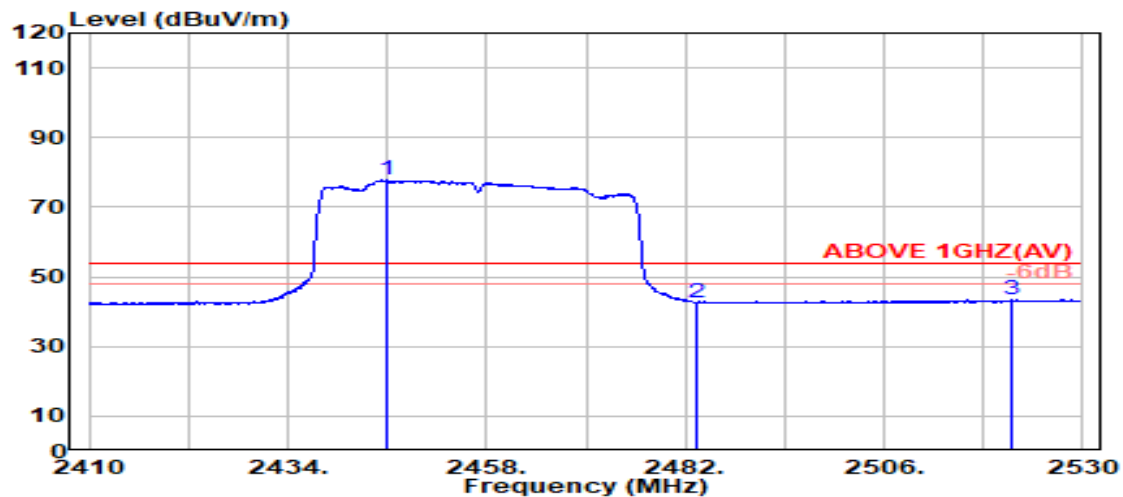

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.900	28.28	5.79	39.87	83.59	77.79	---	---	Average
2483.500	28.37	5.83	39.87	48.41	42.73	54.00	11.27	Average
2521.450	28.53	5.88	39.88	48.80	43.33	54.00	10.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

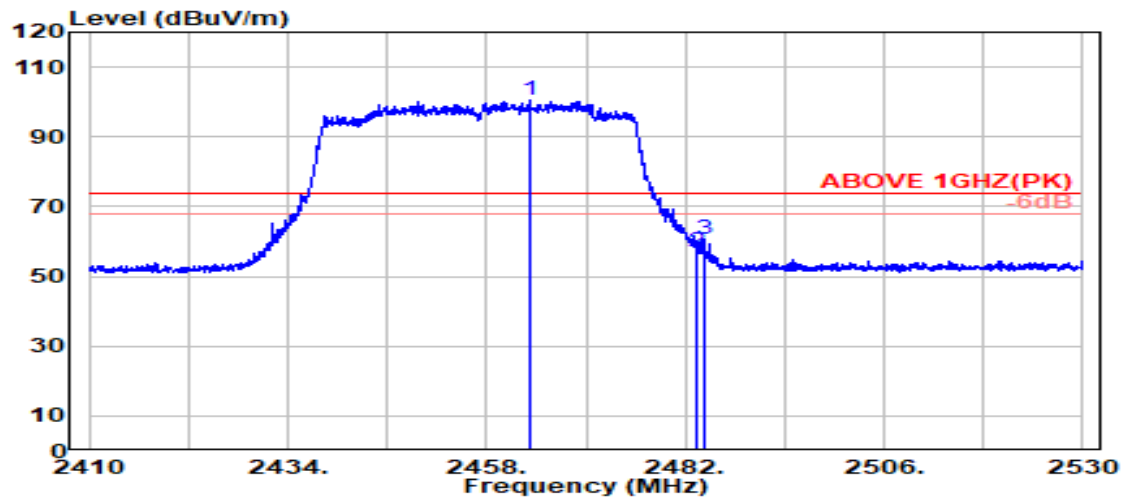

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	28.33	5.81	39.87	106.32	100.58	---	---	Peak
2483.500	28.37	5.83	39.87	62.84	57.17	74.00	16.83	Peak
2484.200	28.37	5.83	39.87	66.54	60.87	74.00	13.13	Peak

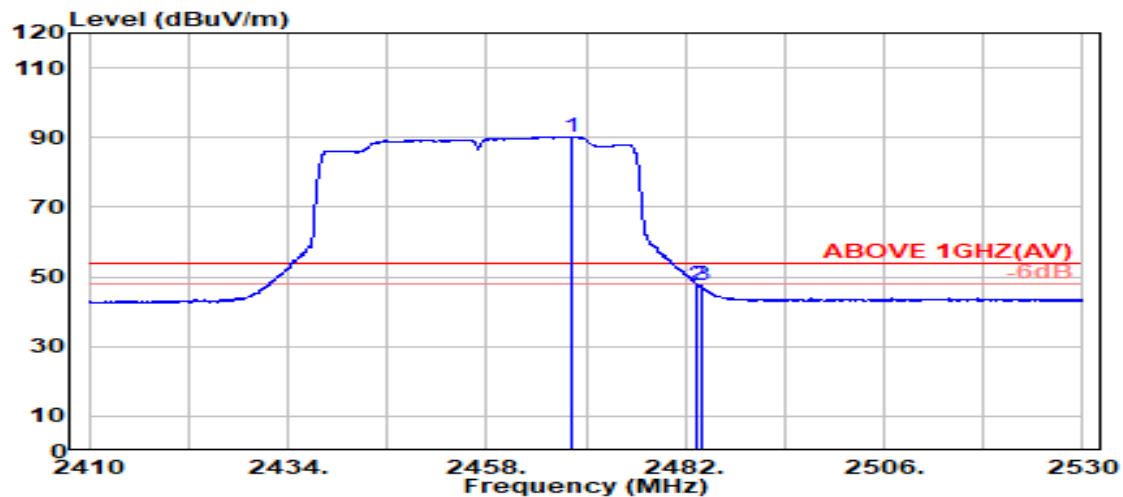

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	28.34	5.81	39.87	95.91	90.18	---	---	Average
2483.500	28.37	5.83	39.87	53.40	47.73	54.00	6.27	Average
2483.900	28.37	5.83	39.87	53.07	47.40	54.00	6.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

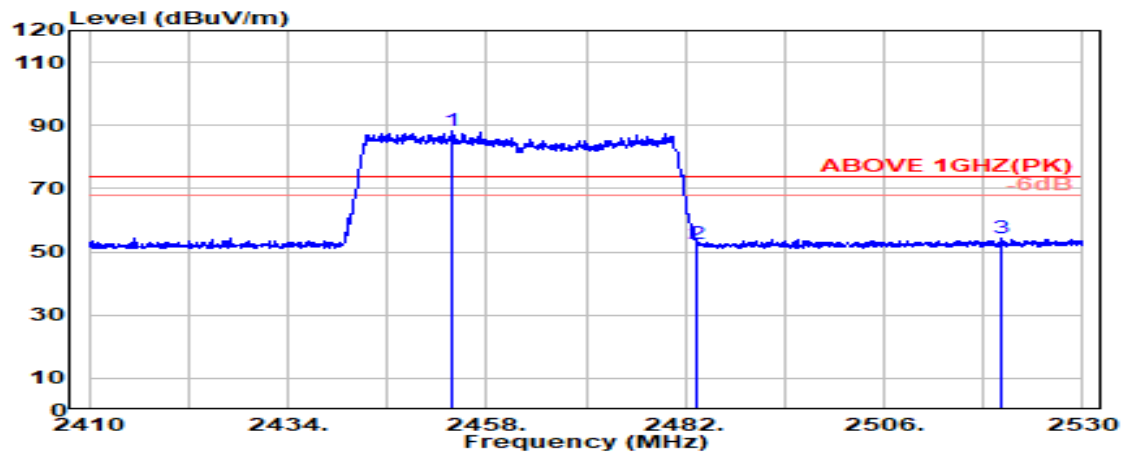

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2453.950	28.31	5.80	39.87	93.98	88.21	---	---	Peak
	2483.500	28.37	5.83	39.87	58.00	52.33	74.00	21.67	Peak
	2520.150	28.52	5.87	39.88	59.81	54.33	74.00	19.67	Peak

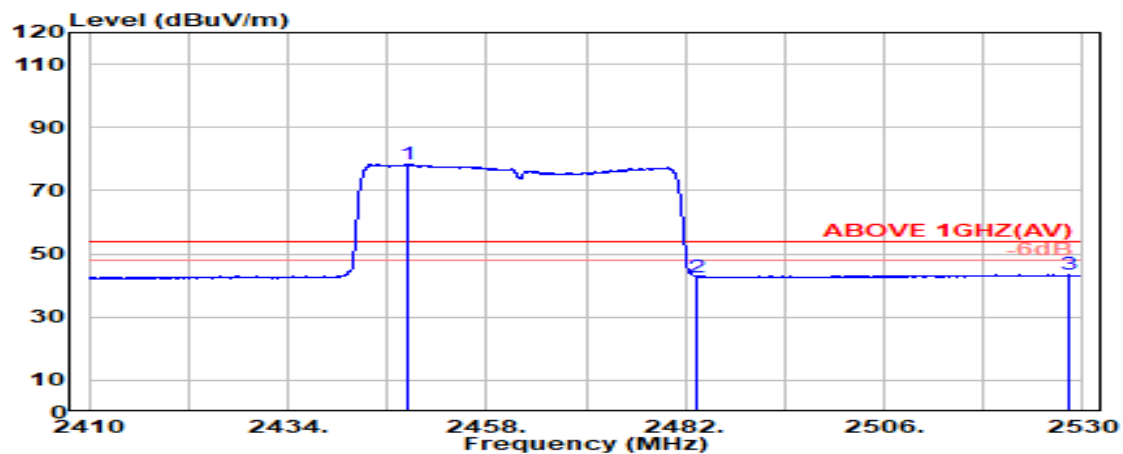

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2448.600	28.29	5.79	39.87	84.21	78.42	---	---	Average
	2483.500	28.37	5.83	39.87	48.36	42.69	54.00	11.31	Average
	2528.200	28.57	5.88	39.88	48.87	43.45	54.00	10.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

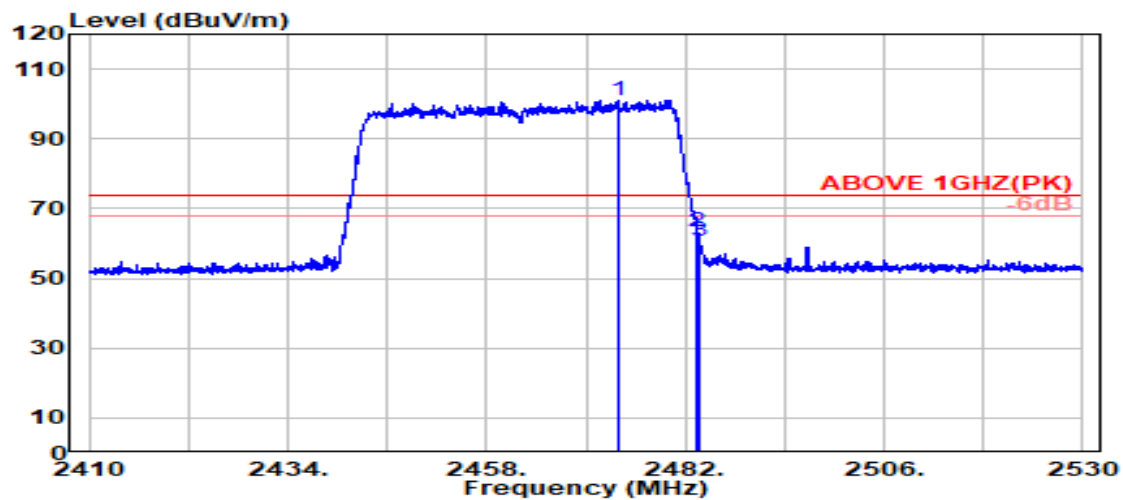

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.800	28.35	5.82	39.87	106.65	100.94	---	---	Peak
2483.500	28.37	5.83	39.87	68.90	63.23	74.00	10.77	Peak
2483.750	28.37	5.83	39.87	66.51	60.84	74.00	13.16	Peak

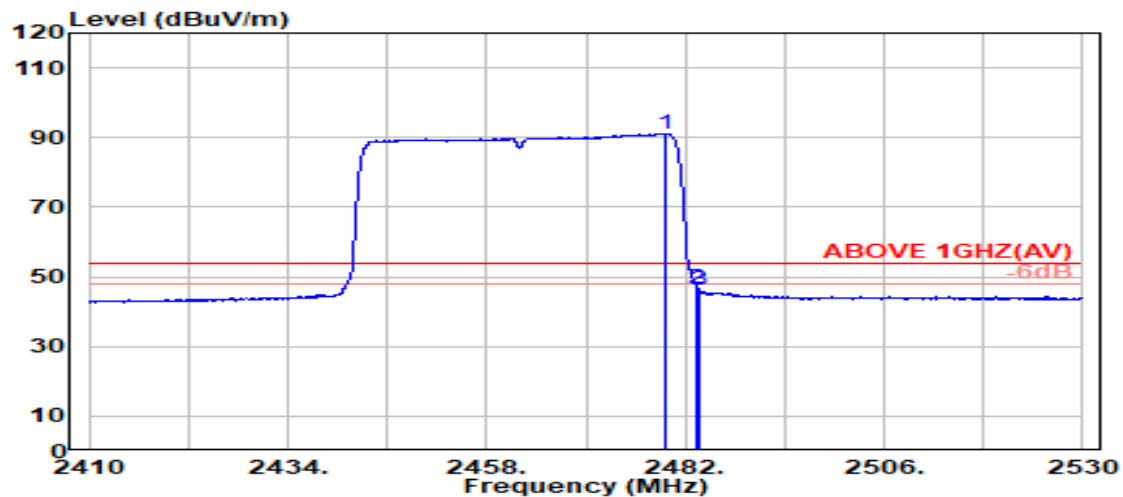

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.450	28.36	5.83	39.87	96.80	91.12	---	---	Average
2483.500	28.37	5.83	39.87	52.45	46.78	54.00	7.22	Average
2483.700	28.37	5.83	39.87	51.97	46.30	54.00	7.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

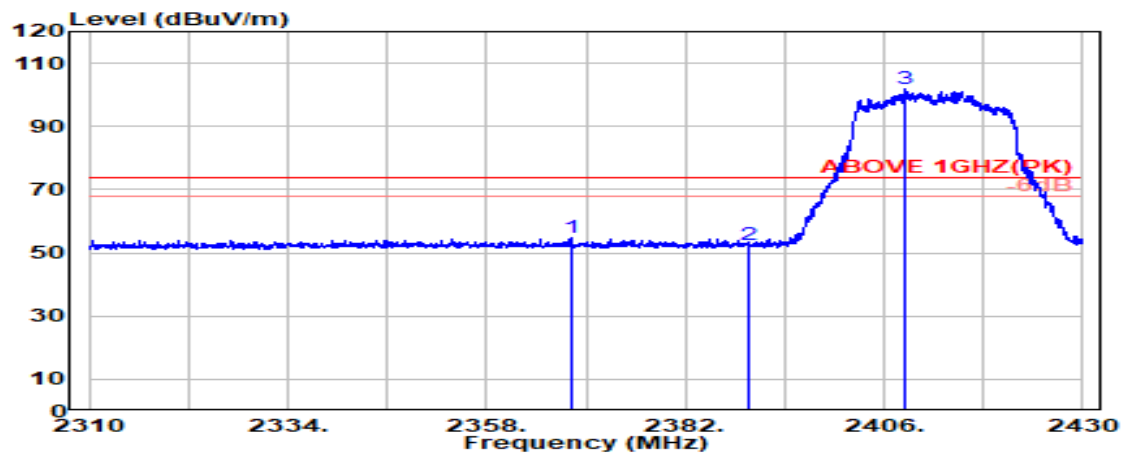

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2368.150	28.23	5.69	39.88	60.91	54.95	74.00	19.05	Peak
2389.800	28.14	5.72	39.88	58.67	52.65	74.00	21.35	Peak
@ 2408.600	28.13	5.74	39.88	107.69	101.70	---	---	Peak

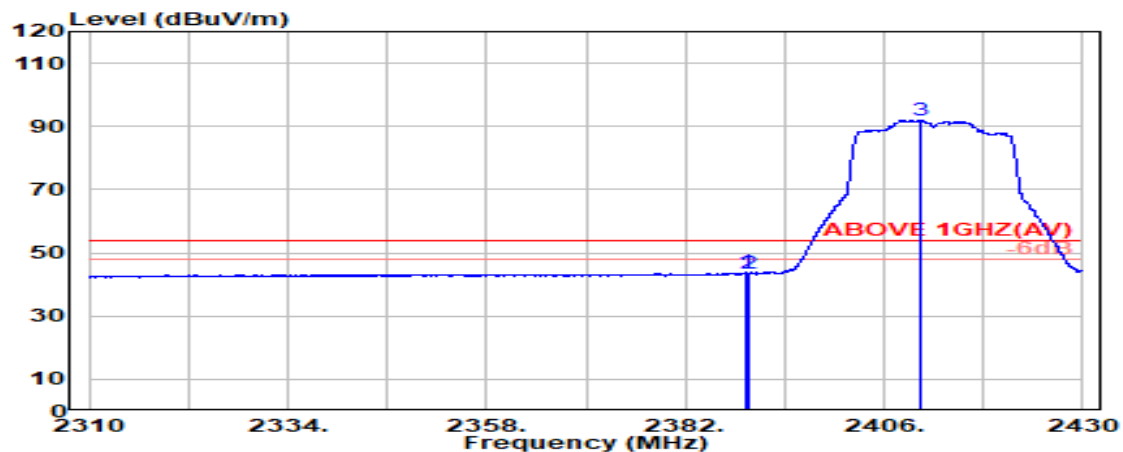

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	49.75	43.74	54.00	10.26	Average
2389.800	28.14	5.72	39.88	49.66	43.64	54.00	10.36	Average
@ 2410.400	28.14	5.75	39.88	98.09	92.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

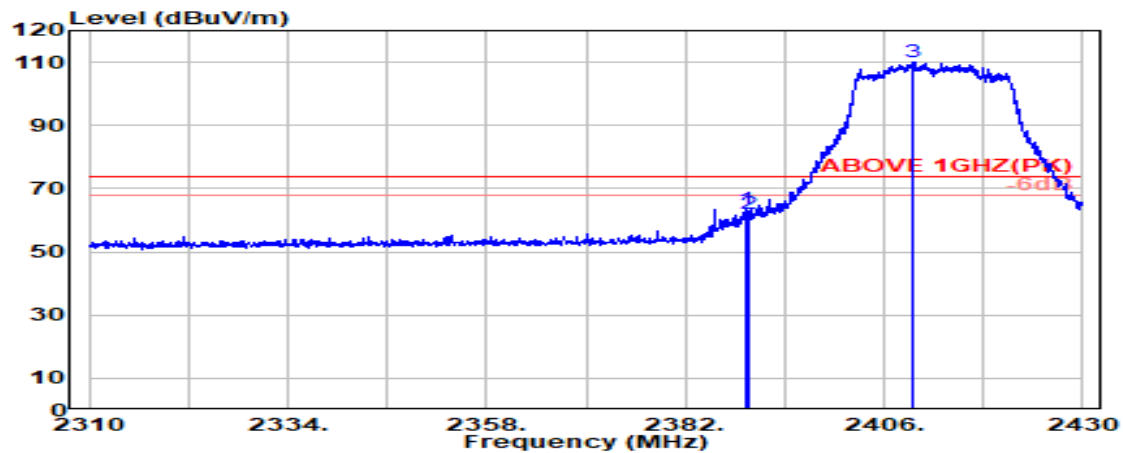

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	69.48	63.47	74.00	10.53	Peak
2389.800	28.14	5.72	39.88	68.12	62.10	74.00	11.90	Peak
@ 2409.550	28.14	5.74	39.88	116.15	110.16	---	---	Peak

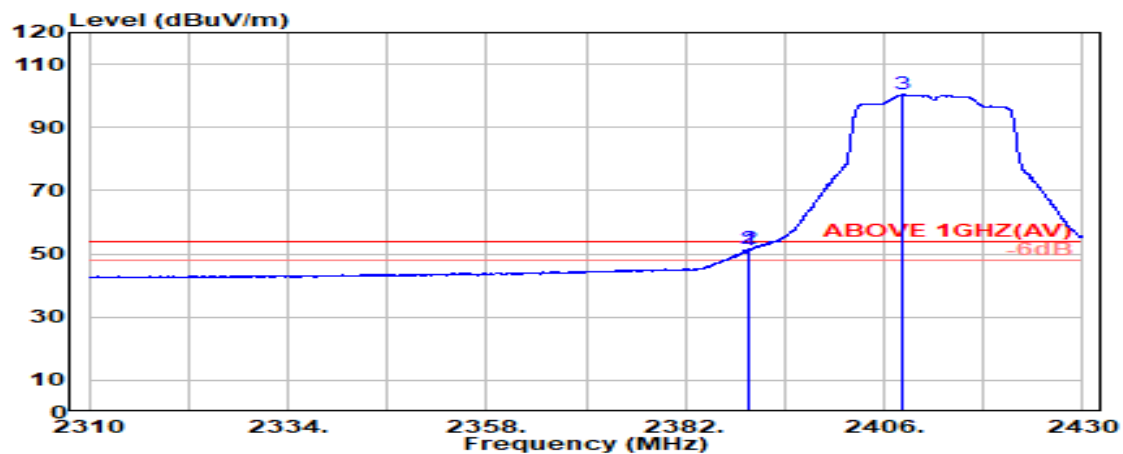

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	57.24	51.22	54.00	2.78	Average
2389.800	28.14	5.72	39.88	57.42	51.40	54.00	2.60	Average
@ 2408.350	28.13	5.74	39.88	106.35	100.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

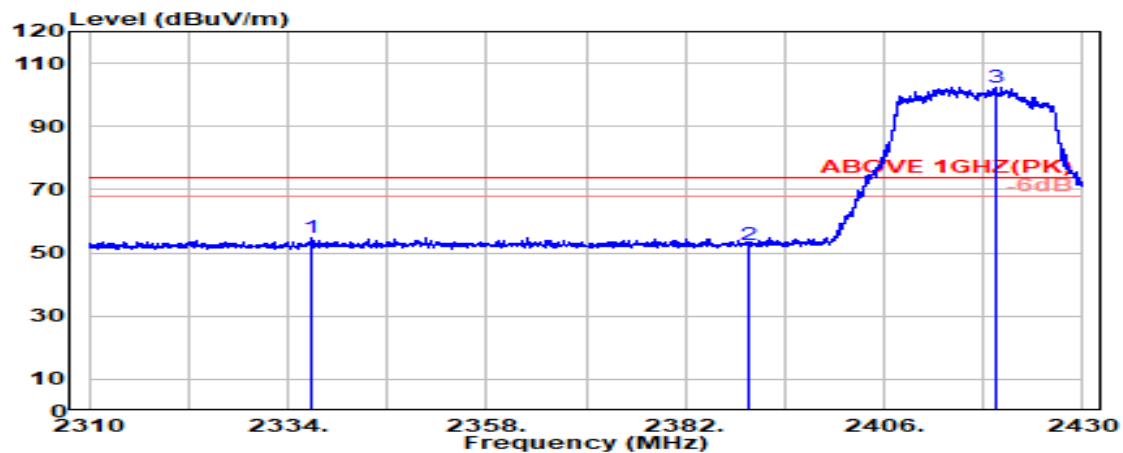

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2336.900	28.22	5.66	39.88	60.92	54.92	74.00	19.08	Peak
2389.800	28.14	5.72	39.88	58.45	52.44	74.00	21.56	Peak
@ 2419.400	28.18	5.76	39.88	108.48	102.54	---	---	Peak

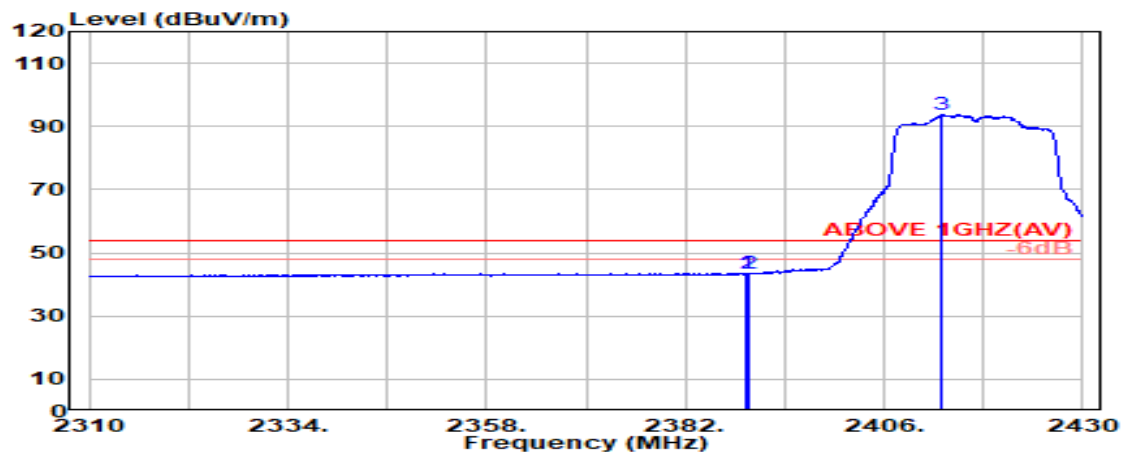

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	49.59	43.58	54.00	10.42	Average
2389.800	28.14	5.72	39.88	49.37	43.35	54.00	10.65	Average
@ 2412.950	28.15	5.75	39.88	99.71	93.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

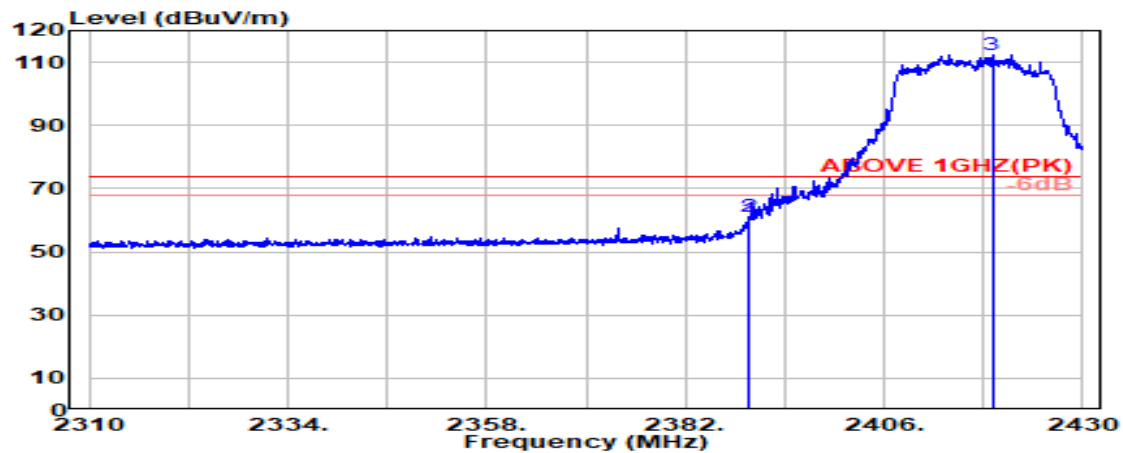

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	66.30	60.28	74.00	13.72	Peak
2389.800	28.14	5.72	39.88	67.03	61.01	74.00	12.99	Peak
@ 2419.050	28.18	5.76	39.88	118.30	112.36	---	---	Peak

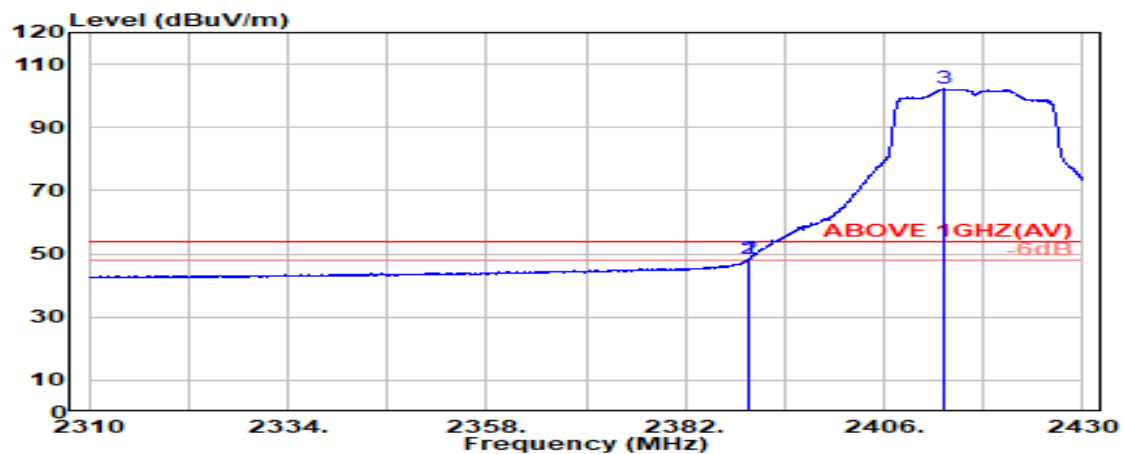

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	54.26	48.24	54.00	5.76	Average
2389.800	28.14	5.72	39.88	54.42	48.40	54.00	5.60	Average
@ 2413.300	28.15	5.75	39.88	108.21	102.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

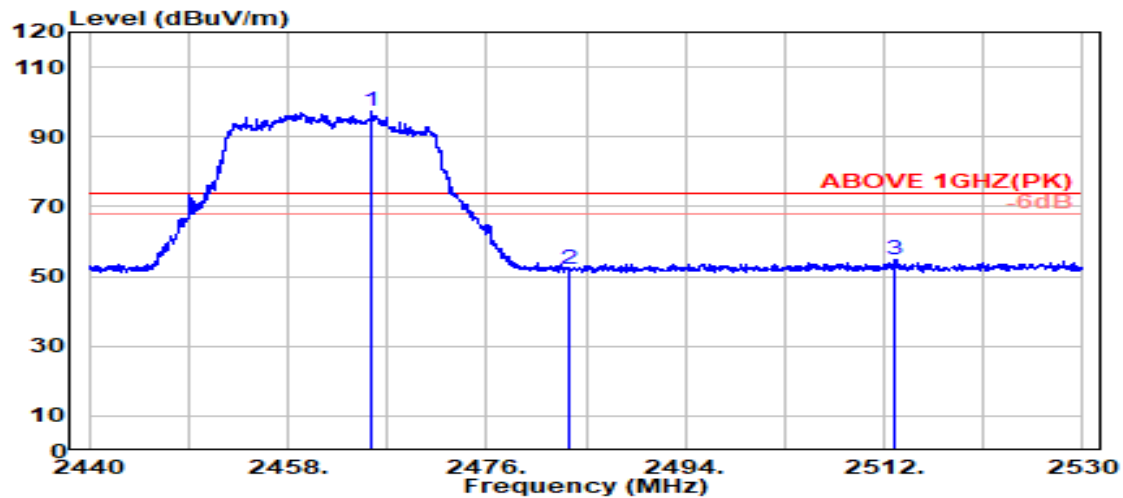

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.650	28.33	5.81	39.87	103.12	97.39	---	---	Peak
2483.500	28.37	5.83	39.87	57.87	52.20	74.00	21.80	Peak
2513.050	28.48	5.87	39.87	60.48	54.95	74.00	19.05	Peak

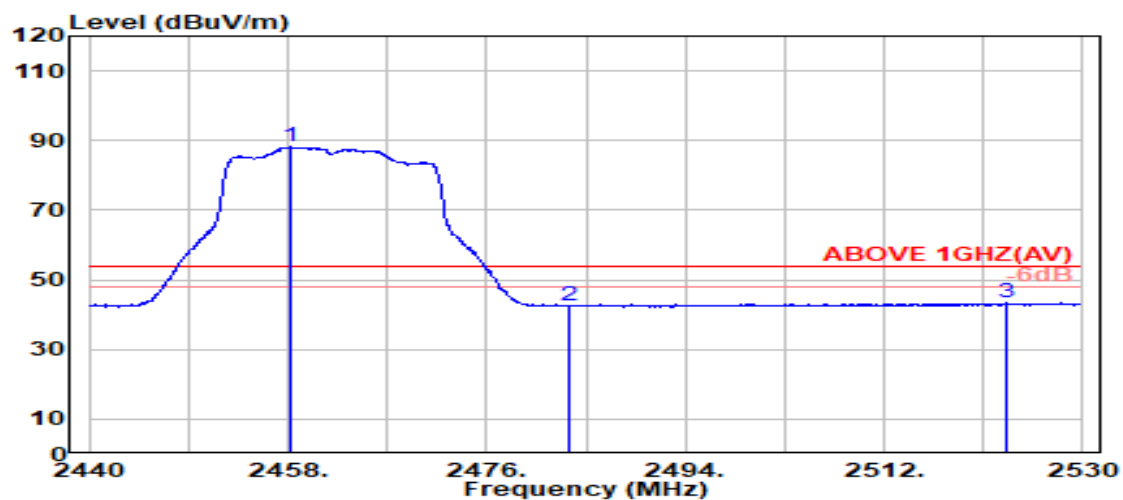

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.250	28.32	5.80	39.87	93.90	88.15	---	---	Average
2483.500	28.37	5.83	39.87	48.22	42.55	54.00	11.45	Average
2523.100	28.54	5.88	39.88	48.75	43.29	54.00	10.71	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

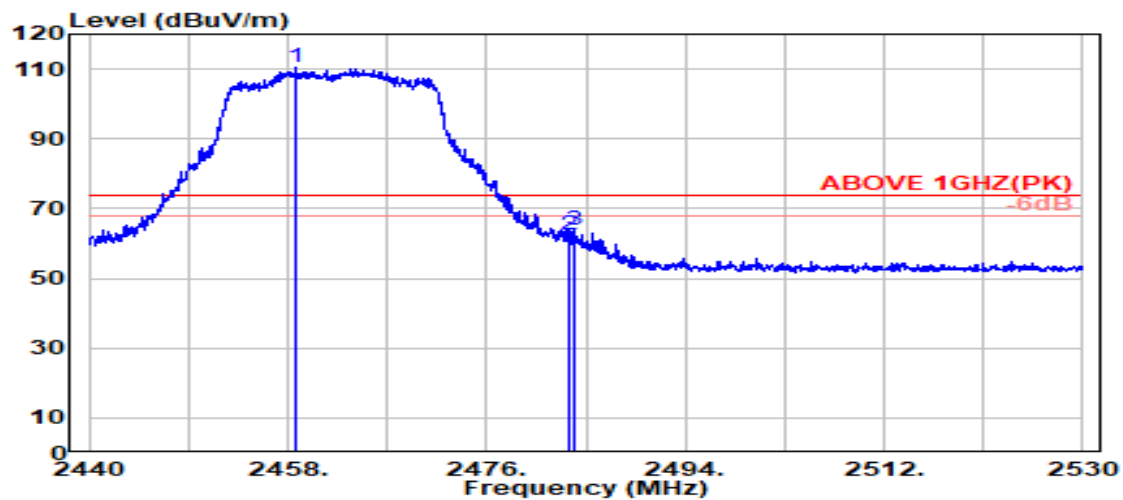

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.750	28.32	5.80	39.87	116.37	110.62	---	---	Peak
2483.500	28.37	5.83	39.87	68.22	62.55	74.00	11.45	Peak
2483.850	28.37	5.83	39.87	69.38	63.71	74.00	10.29	Peak

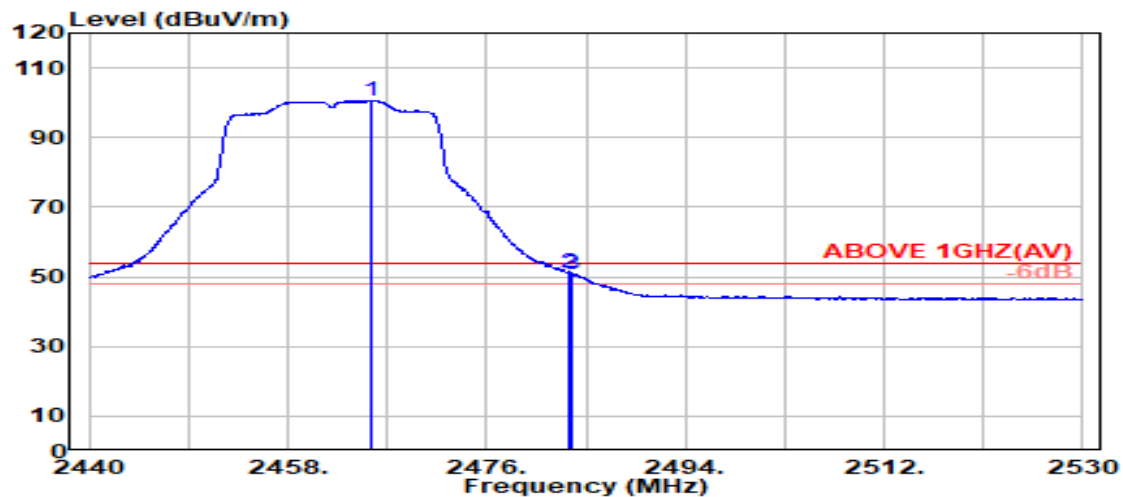

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.600	28.33	5.81	39.87	106.35	100.62	---	---	Average
2483.500	28.37	5.83	39.87	56.71	51.03	54.00	2.97	Average
2483.700	28.37	5.83	39.87	56.59	50.92	54.00	3.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

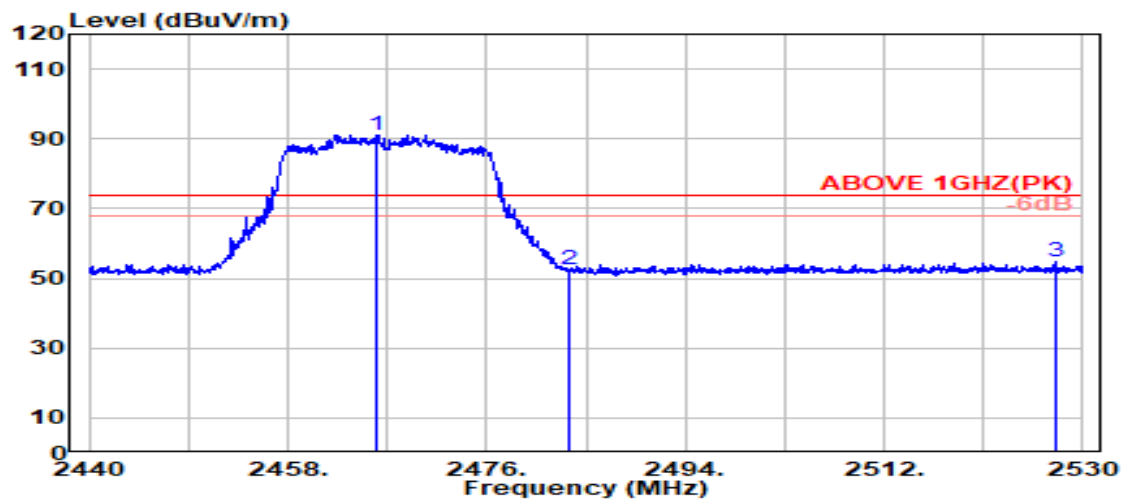

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.33	5.81	39.87	96.91	91.18	---	---	Peak
2483.500	28.37	5.83	39.87	57.99	52.32	74.00	21.68	Peak
2527.450	28.57	5.88	39.88	60.06	54.63	74.00	19.37	Peak

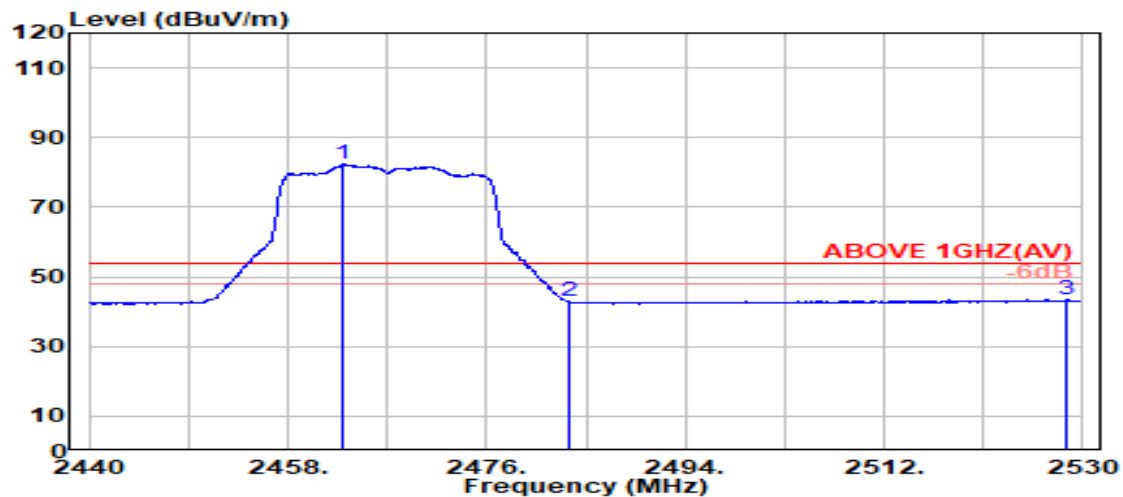

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.050	28.33	5.81	39.87	88.01	82.27	---	---	Average
2483.500	28.37	5.83	39.87	48.61	42.93	54.00	11.07	Average
2528.600	28.57	5.88	39.88	48.84	43.42	54.00	10.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

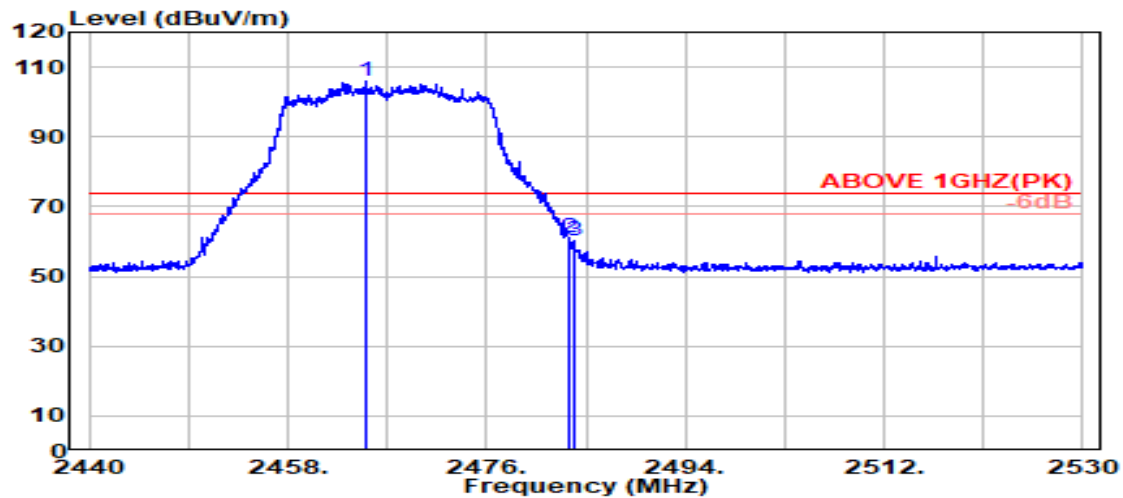

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.050	28.33	5.81	39.87	111.65	105.92	---	---	Peak
2483.500	28.37	5.83	39.87	66.78	61.10	74.00	12.90	Peak
2483.950	28.37	5.83	39.87	65.82	60.14	74.00	13.86	Peak

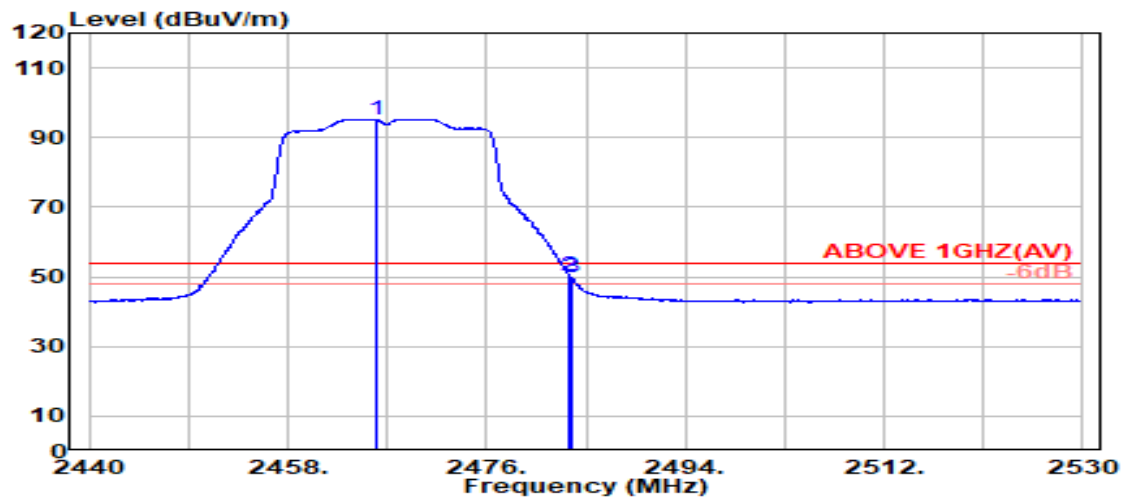

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.950	28.33	5.81	39.87	101.02	95.30	---	---	Average
2483.500	28.37	5.83	39.87	56.12	50.45	54.00	3.55	Average
2483.700	28.37	5.83	39.87	55.35	49.68	54.00	4.32	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

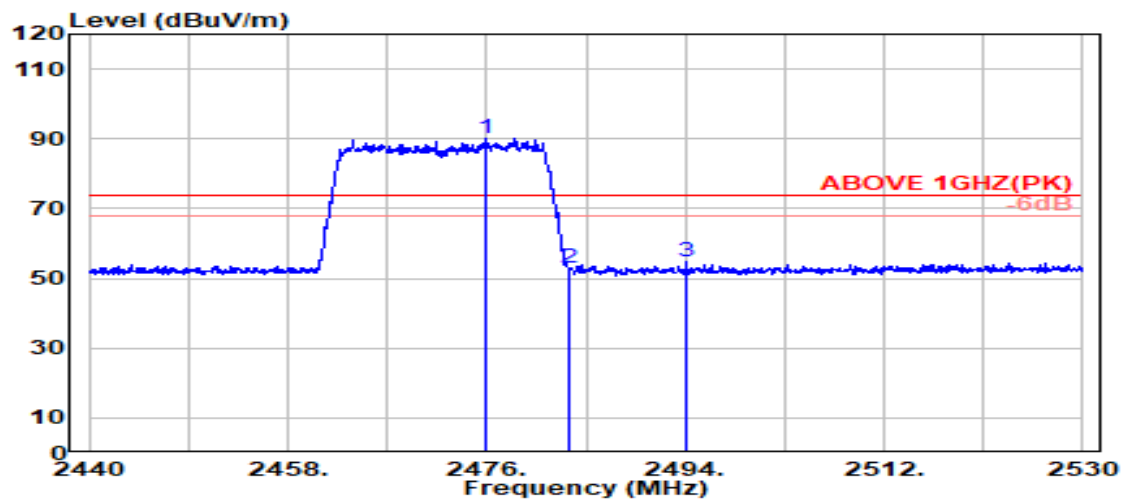

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.35	5.82	39.87	95.75	90.05	---	---	Peak
2483.500	28.37	5.83	39.87	58.75	53.08	74.00	20.92	Peak
2494.100	28.39	5.84	39.87	60.26	54.62	74.00	19.38	Peak

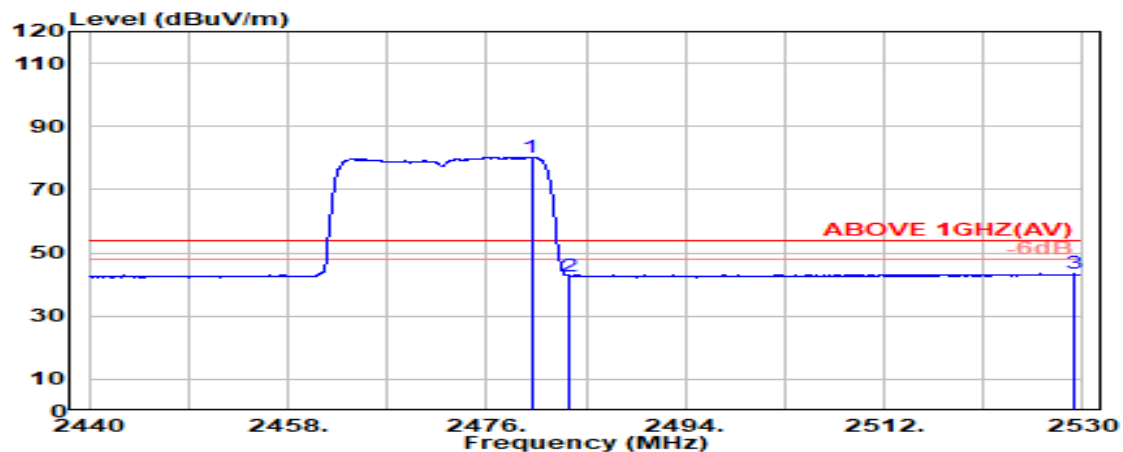

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	85.98	80.30	54.00	---	Average
2483.500	28.37	5.83	39.87	48.37	42.70	54.00	11.30	Average
2529.250	28.58	5.89	39.88	48.67	43.25	54.00	10.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

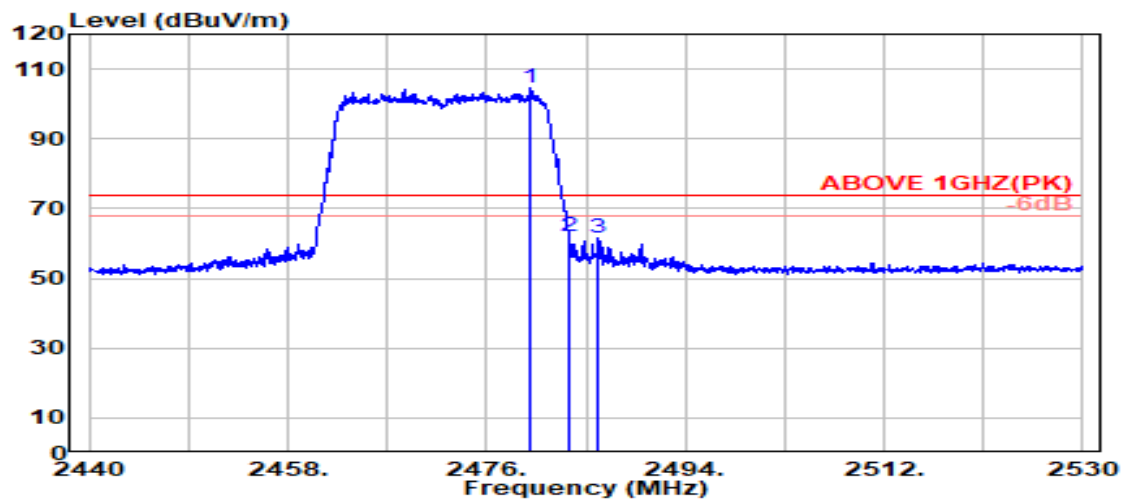

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	110.10	104.41	---	---	Peak
2483.500	28.37	5.83	39.87	67.74	62.07	74.00	11.93	Peak
2486.150	28.37	5.83	39.87	67.43	61.76	74.00	12.24	Peak

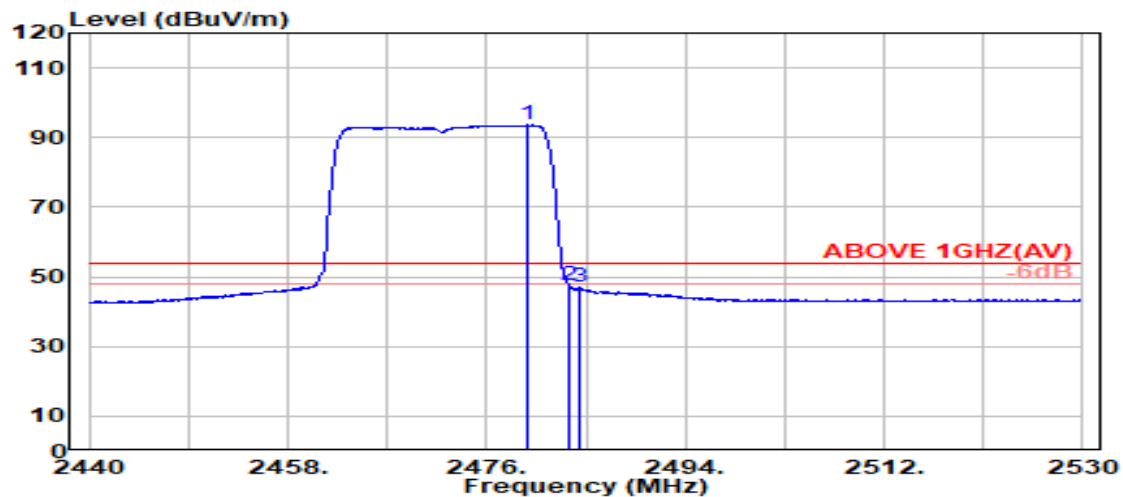

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.650	28.36	5.83	39.87	99.25	93.57	---	---	Average
2483.500	28.37	5.83	39.87	53.03	47.36	54.00	6.64	Average
2484.350	28.37	5.83	39.87	52.58	46.91	54.00	7.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

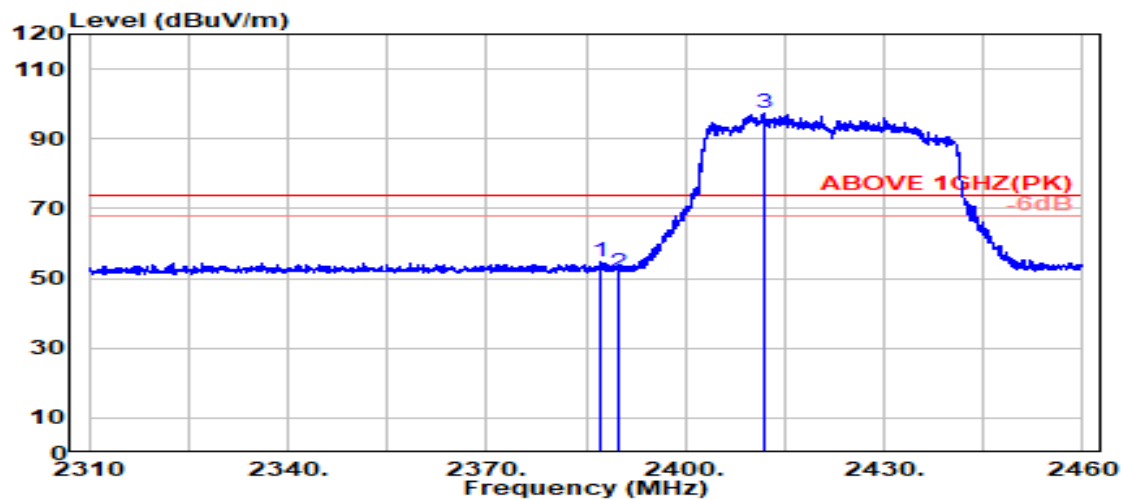

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	28.15	5.72	39.88	60.71	54.70	74.00	19.30	Peak
2389.800	28.14	5.72	39.88	57.86	51.85	74.00	22.15	Peak
@ 2411.750	28.15	5.75	39.88	103.31	97.32	---	---	Peak

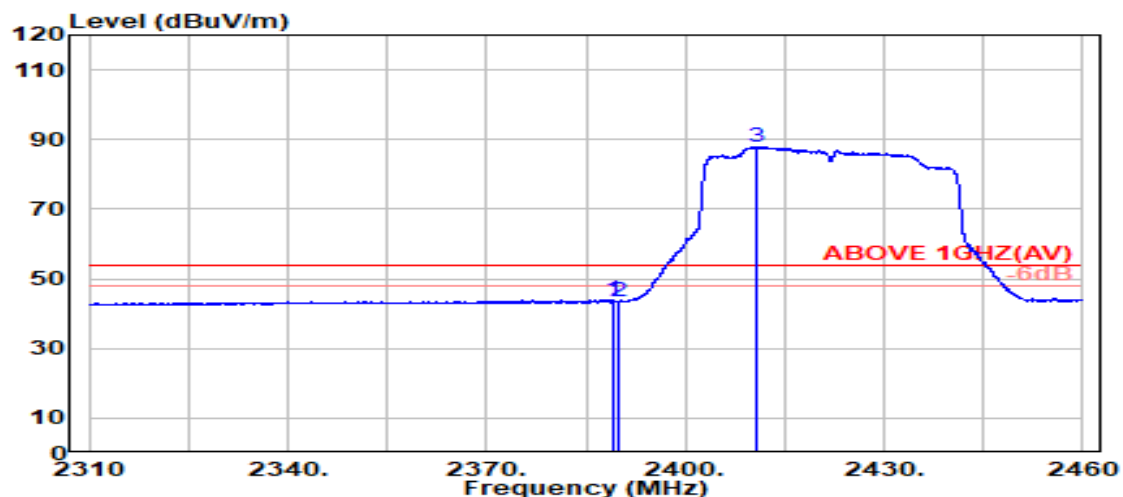

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	49.88	43.87	54.00	10.13	Average
2389.800	28.14	5.72	39.88	49.68	43.66	54.00	10.34	Average
@ 2410.750	28.14	5.75	39.88	93.98	87.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

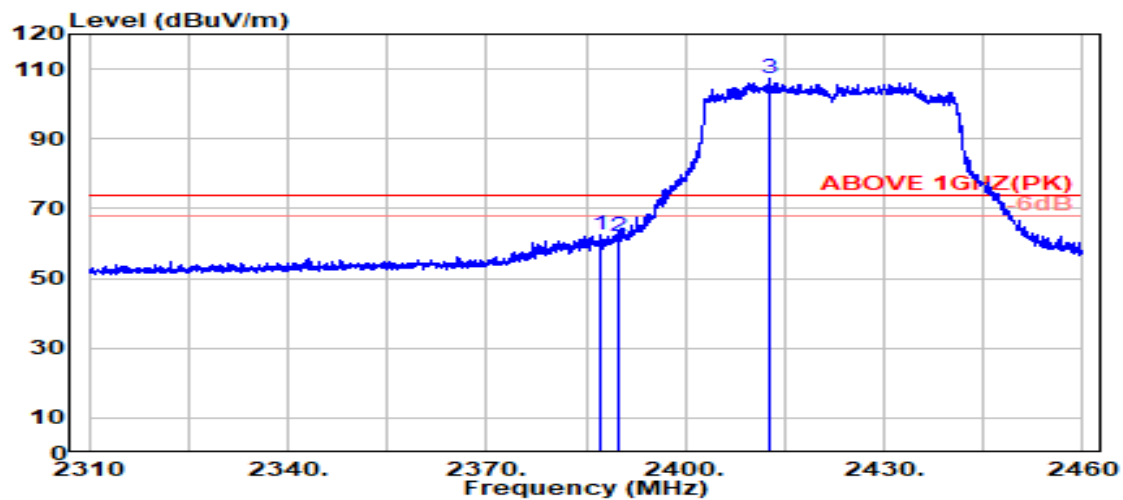

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.15	5.72	39.88	68.69	62.68	74.00	11.32	Peak
2389.800	28.14	5.72	39.88	68.06	62.05	74.00	11.95	Peak
@ 2412.600	28.15	5.75	39.88	113.08	107.10	---	---	Peak

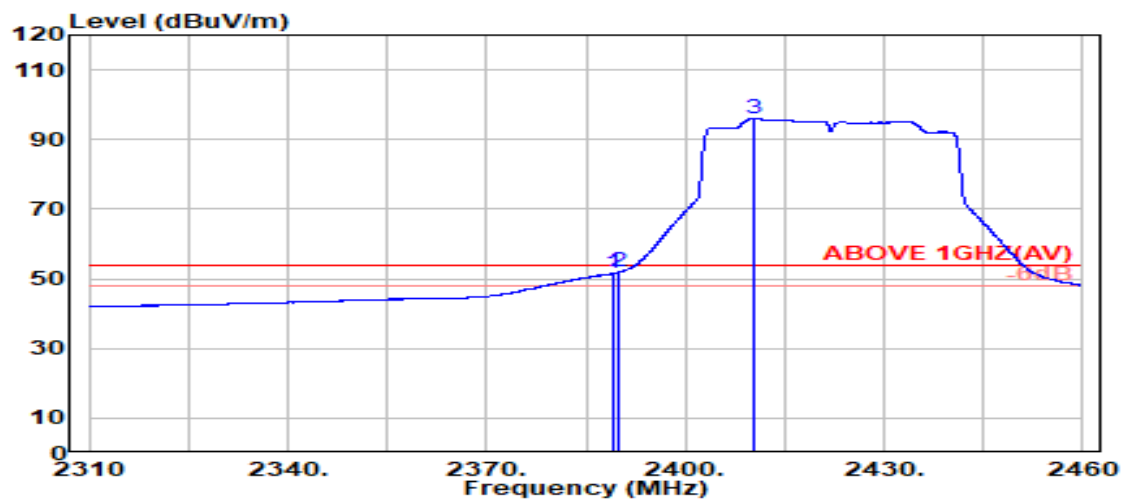

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	57.52	51.51	54.00	2.49	Average
2390.000	28.14	5.72	39.88	57.92	51.90	54.00	2.10	Average
@ 2410.450	28.14	5.75	39.88	101.98	95.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

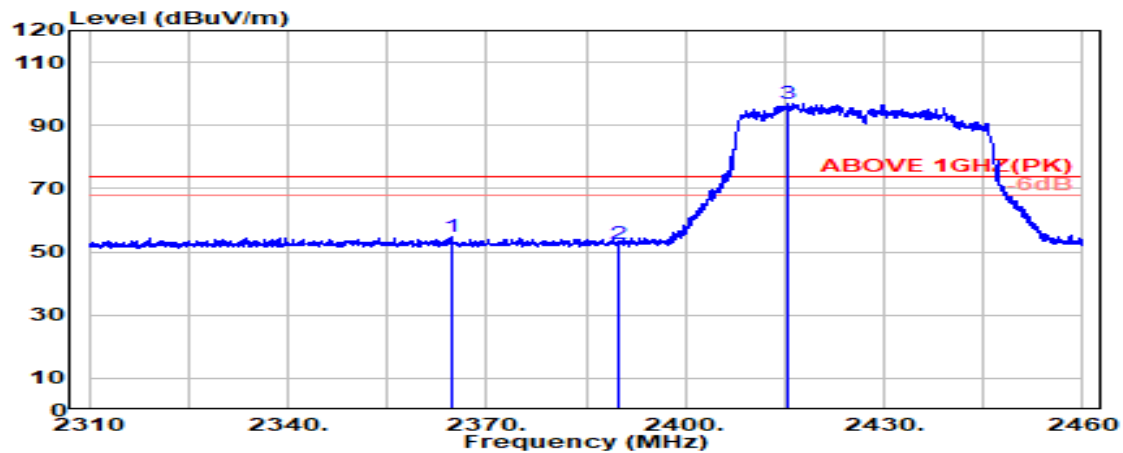

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2364.600	28.24	5.69	39.88	60.55	54.60	74.00	19.40	Peak
2389.800	28.14	5.72	39.88	58.40	52.38	74.00	21.62	Peak
@ 2415.350	28.16	5.75	39.88	103.07	97.10	---	---	Peak

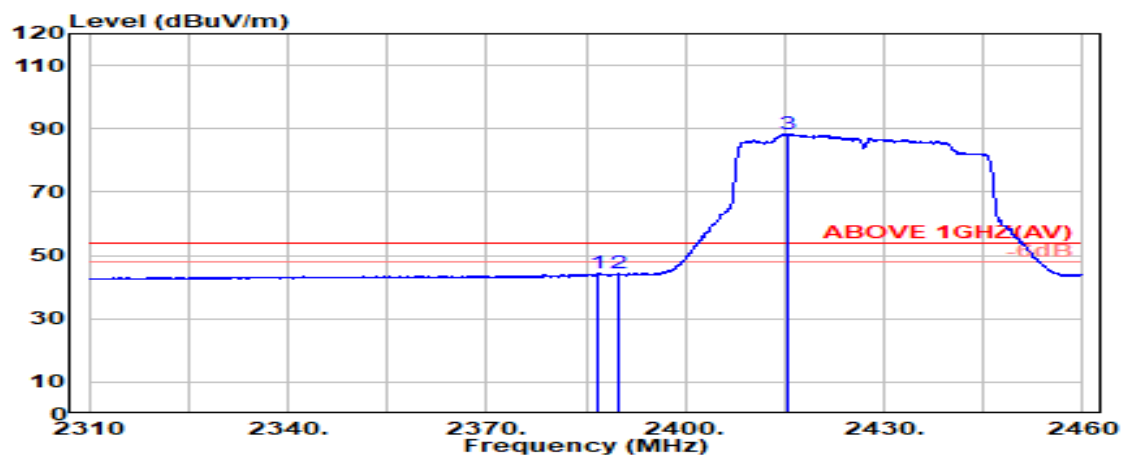


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.750	28.15	5.72	39.88	50.30	44.29	54.00	9.71	Average
2389.800	28.14	5.72	39.88	50.28	44.27	54.00	9.73	Average
@ 2415.500	28.16	5.75	39.88	94.38	88.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

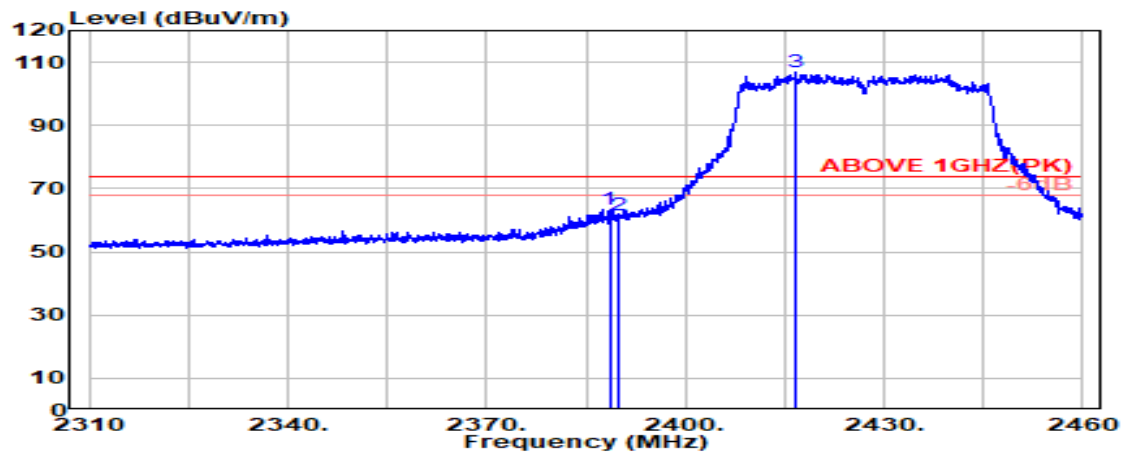

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.550	28.15	5.72	39.88	69.22	63.20	74.00	10.80	Peak
2389.800	28.14	5.72	39.88	67.54	61.53	74.00	12.47	Peak
@ 2416.650	28.17	5.75	39.88	112.81	106.85	---	---	Peak

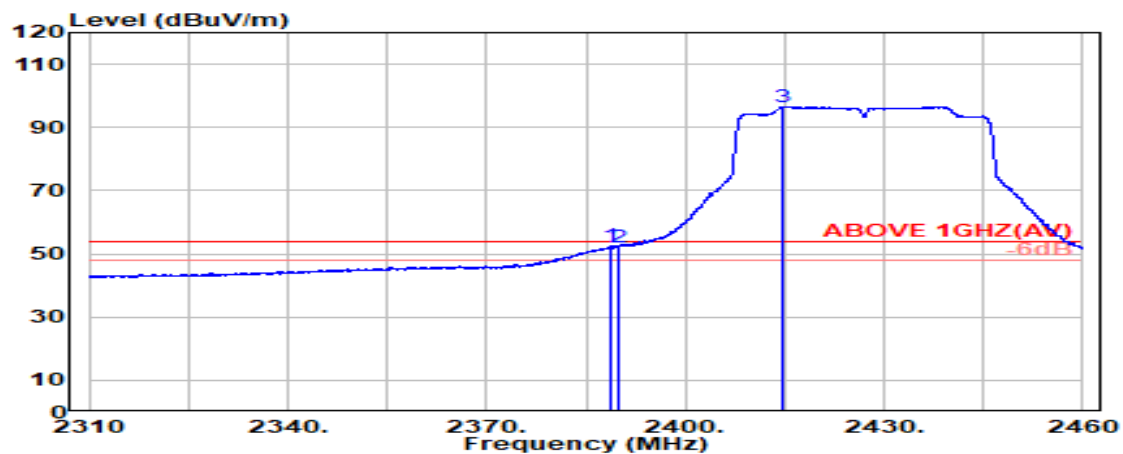

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.88	58.45	52.43	54.00	1.57	Average
2389.800	28.14	5.72	39.88	58.31	52.29	54.00	1.71	Average
@ 2414.700	28.16	5.75	39.88	102.62	96.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

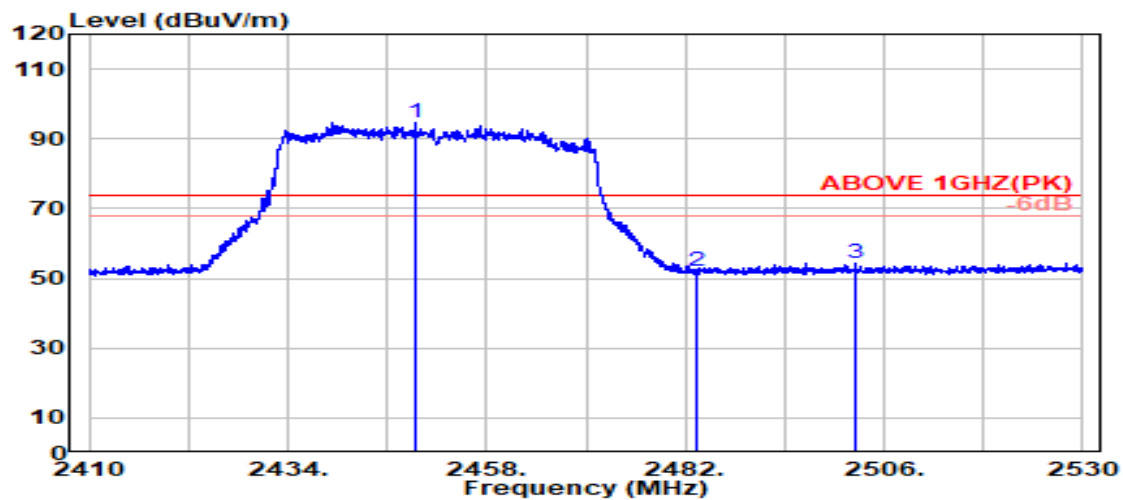

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2449.400	28.30	5.79	39.87	100.29	94.51	---	---	Peak
	2483.500	28.37	5.83	39.87	57.65	51.98	74.00	22.02	Peak
	2502.550	28.42	5.85	39.87	60.03	54.42	74.00	19.58	Peak

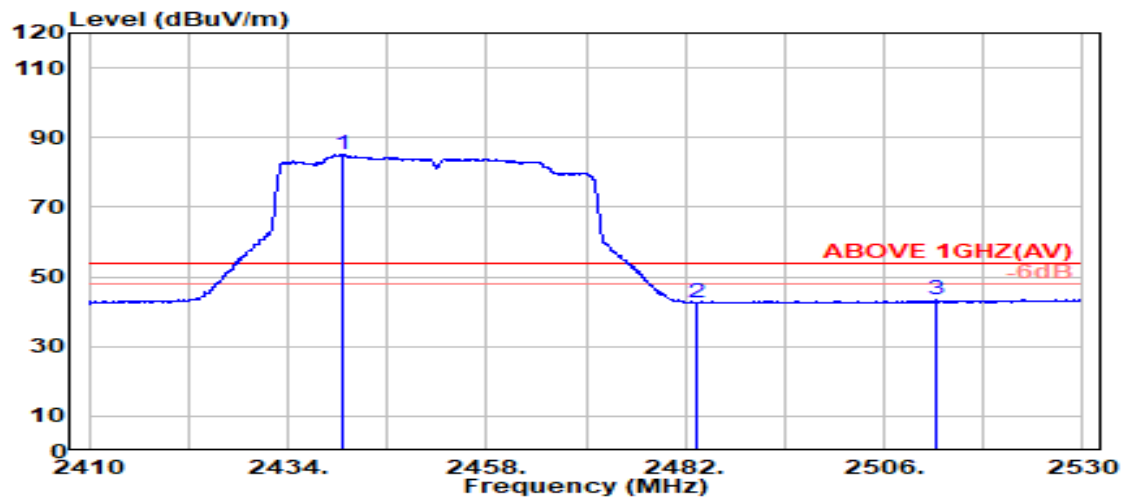

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.750	28.26	5.78	39.87	90.96	85.13	---	---	Average
	2483.500	28.37	5.83	39.87	48.33	42.66	54.00	11.34	Average
	2512.350	28.47	5.87	39.87	48.93	43.39	54.00	10.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

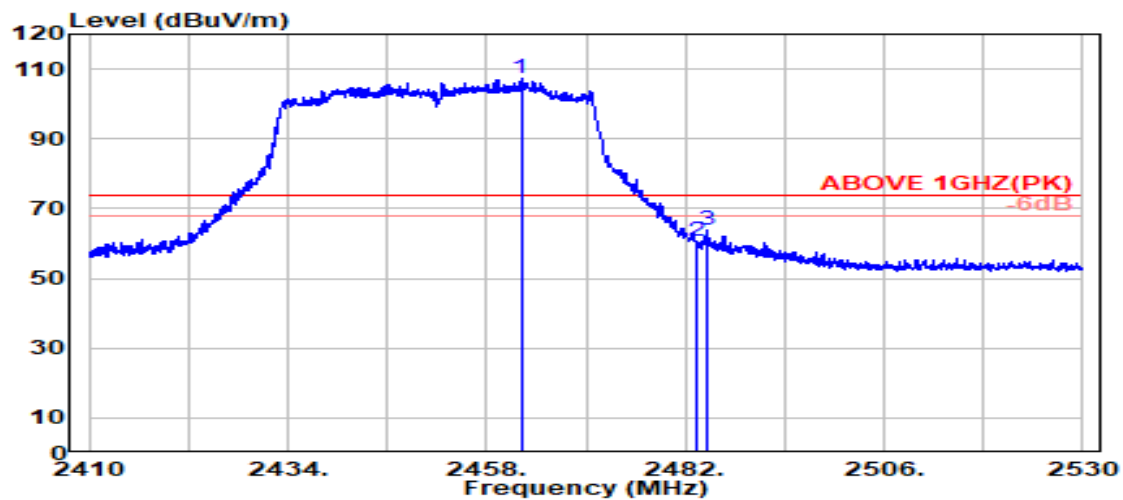

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.150	28.32	5.81	39.87	113.07	107.33	---	---	Peak
2483.500	28.37	5.83	39.87	66.24	60.57	74.00	13.43	Peak
2484.500	28.37	5.83	39.87	69.30	63.63	74.00	10.37	Peak

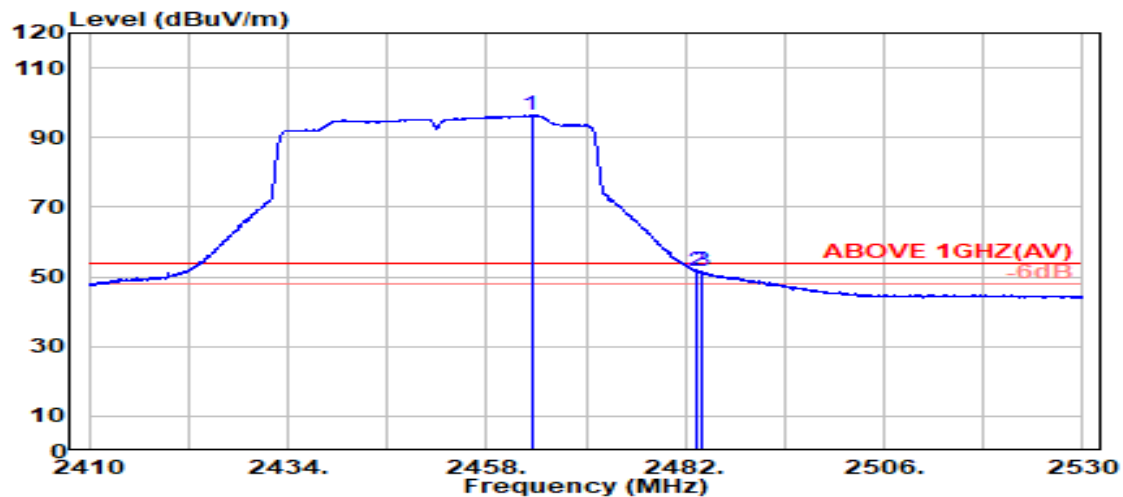

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.400	28.33	5.81	39.87	102.06	96.32	---	---	Average
2483.500	28.37	5.83	39.87	57.15	51.48	54.00	2.52	Average
2483.850	28.37	5.83	39.87	57.15	51.47	54.00	2.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

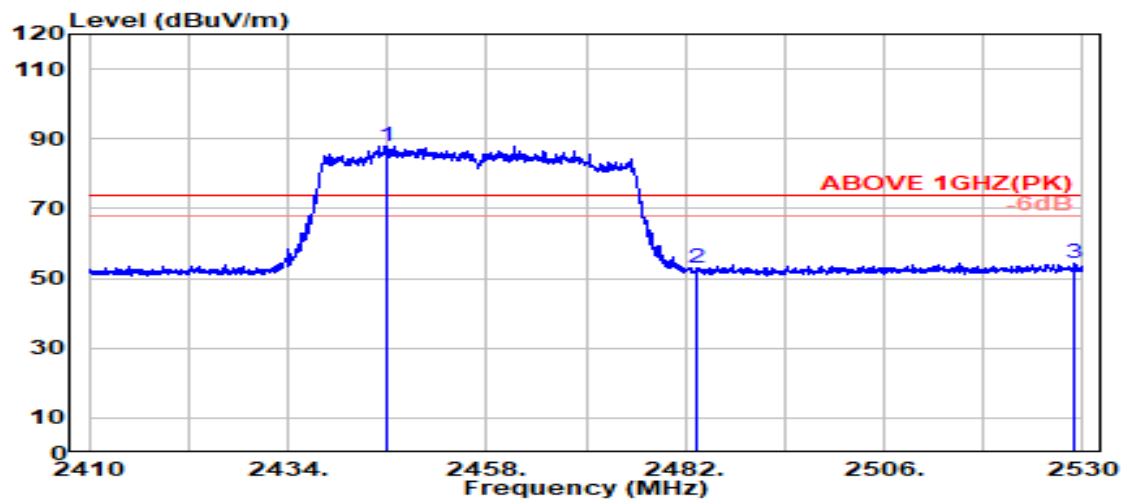

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	28.28	5.79	39.87	93.87	88.06	---	---	Peak
2483.500	28.37	5.83	39.87	58.63	52.96	74.00	21.04	Peak
2528.900	28.57	5.89	39.88	59.81	54.39	74.00	19.61	Peak

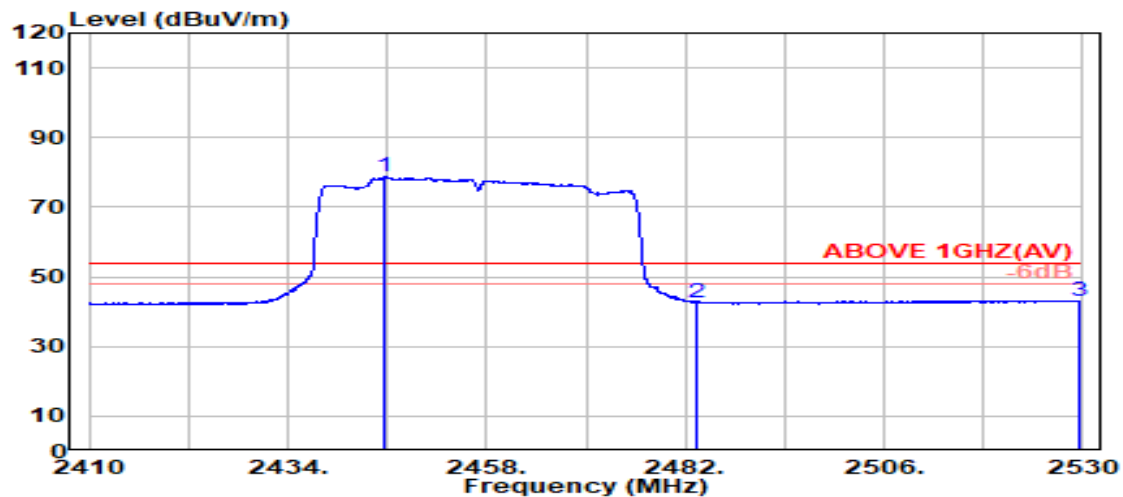

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.750	28.28	5.79	39.87	84.53	78.73	---	---	Average
2483.500	28.37	5.83	39.87	48.39	42.72	54.00	11.28	Average
2529.450	28.58	5.89	39.88	48.65	43.23	54.00	10.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

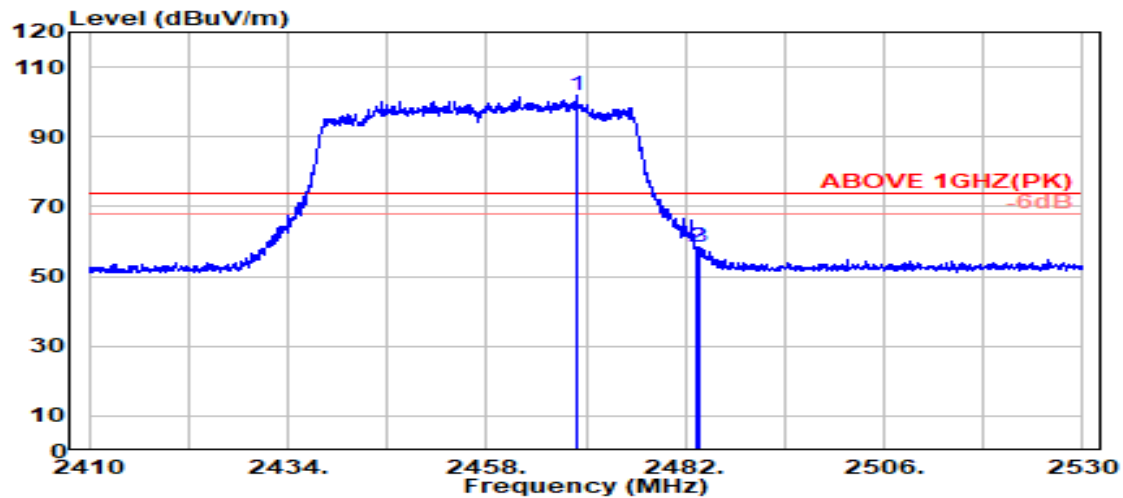

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.950	28.34	5.81	39.87	107.38	101.66	---	---	Peak
2483.500	28.37	5.83	39.87	64.11	58.44	74.00	15.56	Peak
2483.700	28.37	5.83	39.87	64.03	58.36	74.00	15.64	Peak

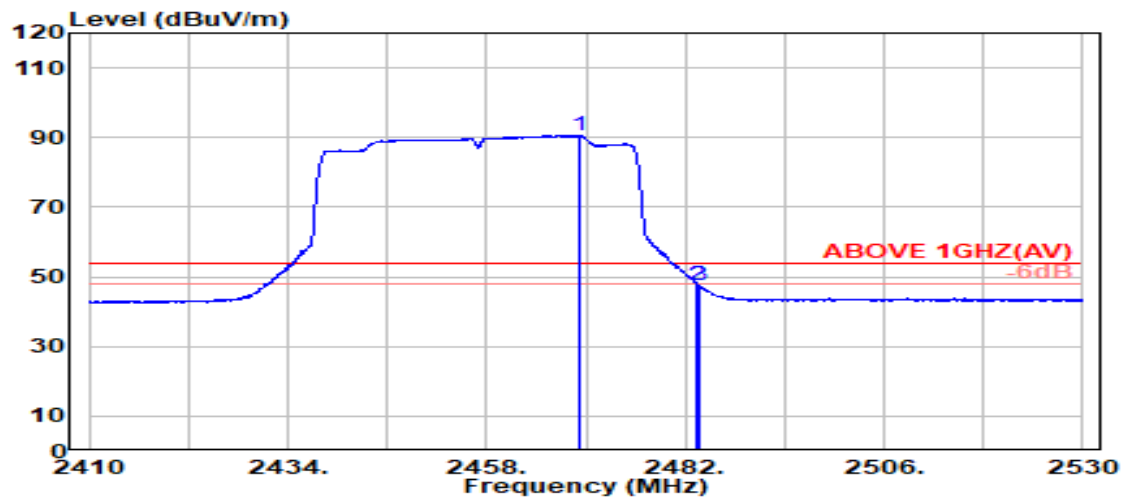

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	28.34	5.81	39.87	96.27	90.55	---	---	Average
2483.500	28.37	5.83	39.87	53.29	47.62	54.00	6.38	Average
2483.750	28.37	5.83	39.87	53.07	47.40	54.00	6.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

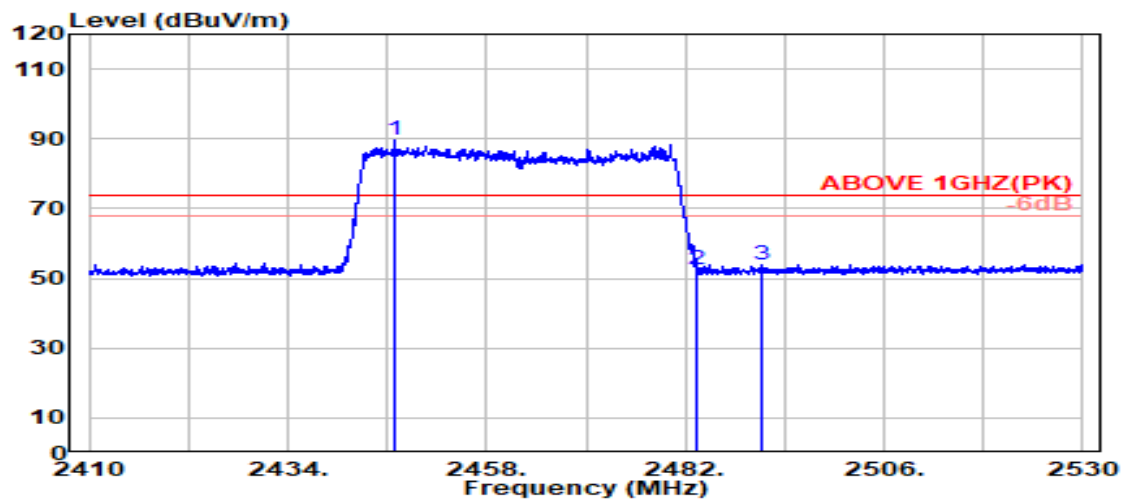

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.800	28.29	5.79	39.87	95.54	89.74	---	---	Peak
2483.500	28.37	5.83	39.87	58.13	52.46	74.00	21.54	Peak
2491.350	28.38	5.84	39.87	59.71	54.06	74.00	19.94	Peak

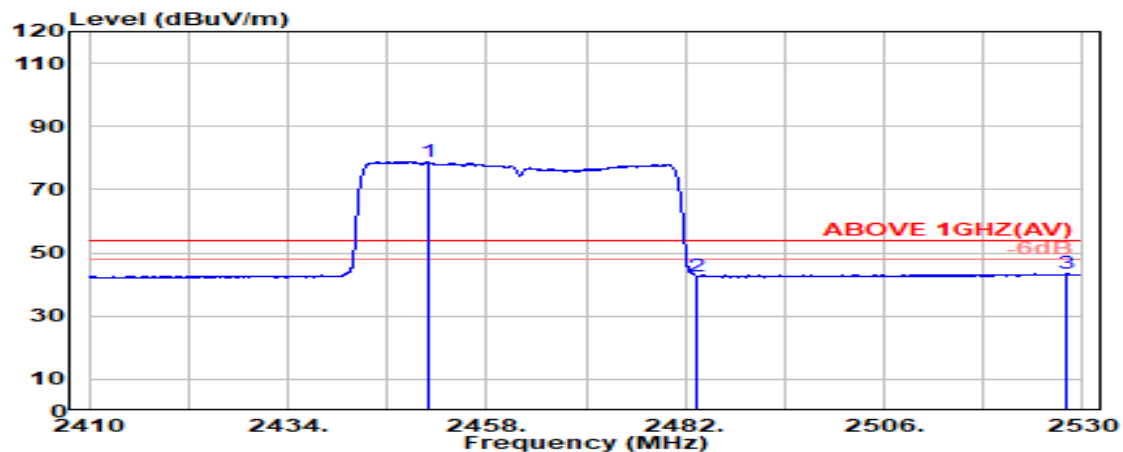

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.900	28.30	5.79	39.87	84.64	78.86	---	---	Average
2483.500	28.37	5.83	39.87	48.32	42.65	54.00	11.35	Average
2528.150	28.57	5.88	39.88	48.93	43.50	54.00	10.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

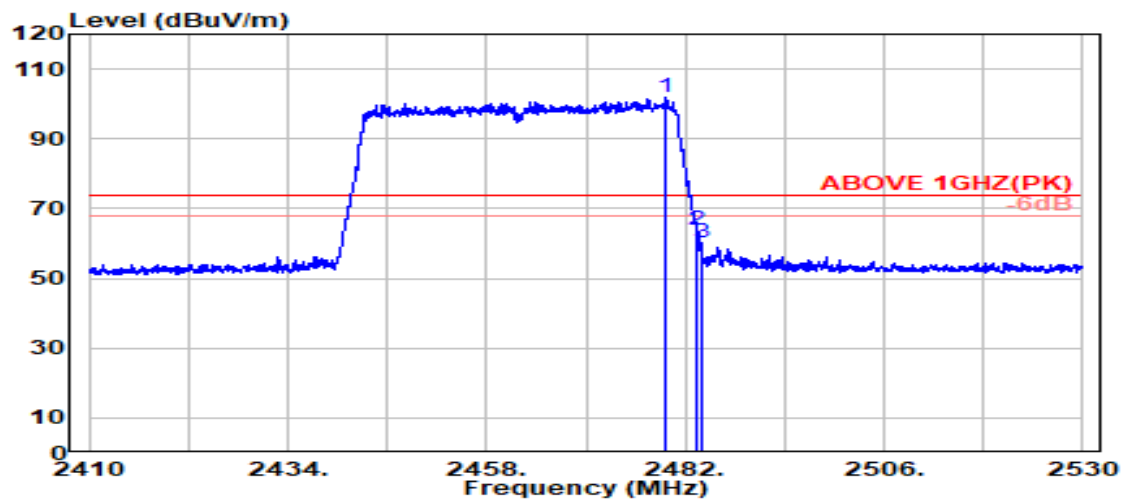

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.36	5.83	39.87	107.55	101.86	---	---	Peak
2483.500	28.37	5.83	39.87	69.71	64.04	74.00	9.96	Peak
2484.000	28.37	5.83	39.87	66.07	60.40	74.00	13.60	Peak

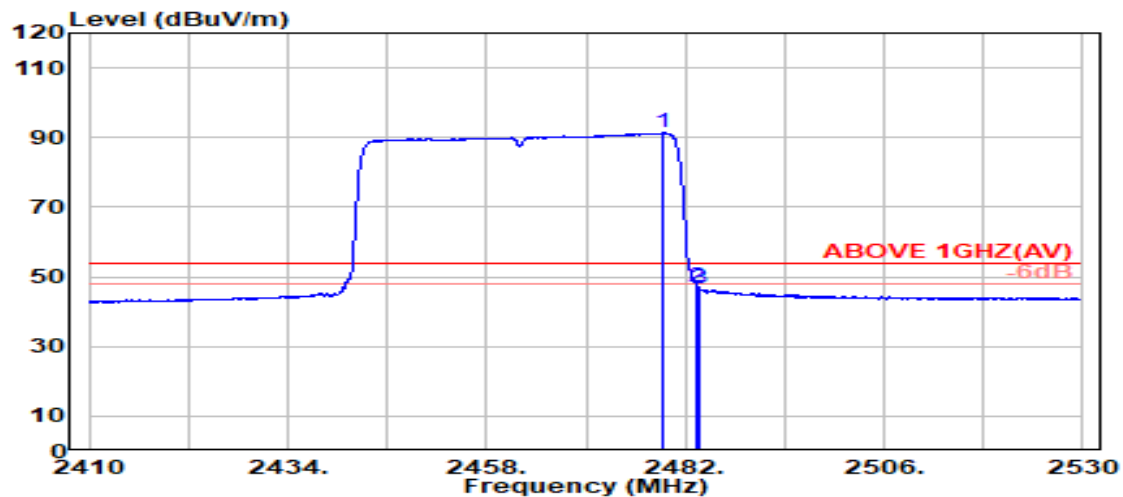

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.36	5.83	39.87	97.07	91.39	---	---	Average
2483.500	28.37	5.83	39.87	52.82	47.15	54.00	6.85	Average
2483.800	28.37	5.83	39.87	52.25	46.58	54.00	7.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

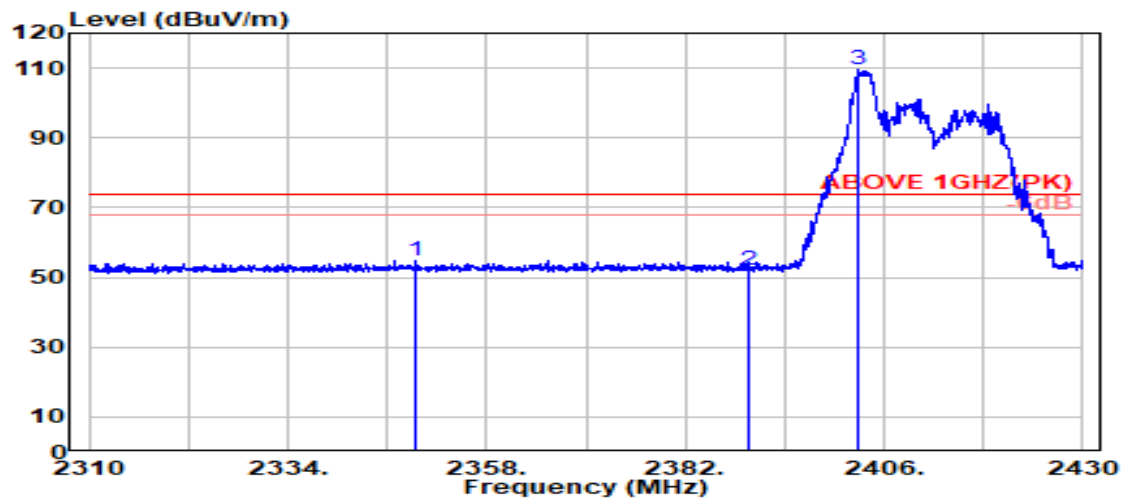

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2349.500	28.30	5.67	39.88	60.77	54.86	74.00	19.14	Peak
2389.800	28.14	5.72	39.88	58.23	52.21	74.00	21.79	Peak
@ 2402.900	28.11	5.74	39.88	115.83	109.80	---	---	Peak

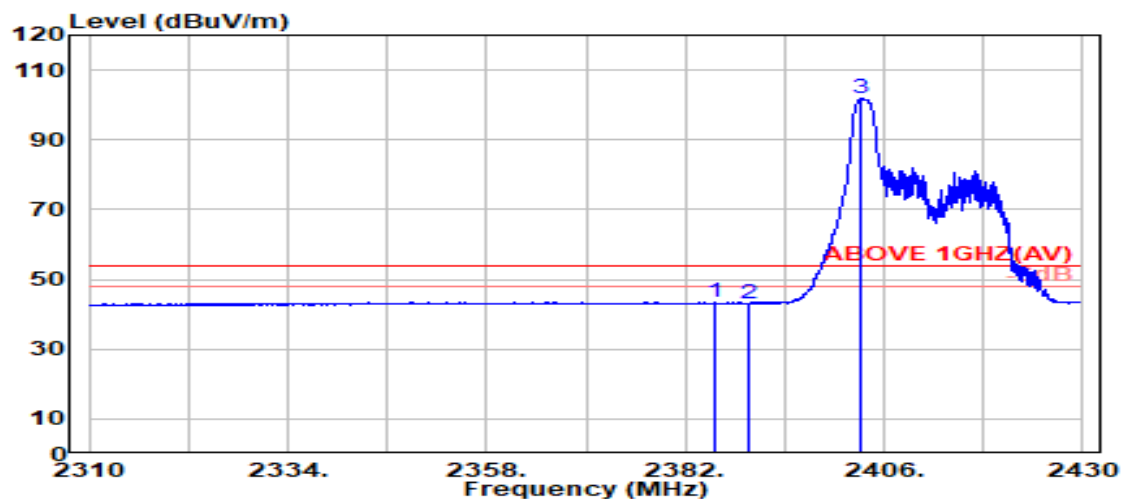

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.500	28.16	5.72	39.88	49.60	43.59	54.00	10.41	Average
2389.800	28.14	5.72	39.88	49.04	43.03	54.00	10.97	Average
@ 2403.300	28.11	5.74	39.88	107.83	101.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

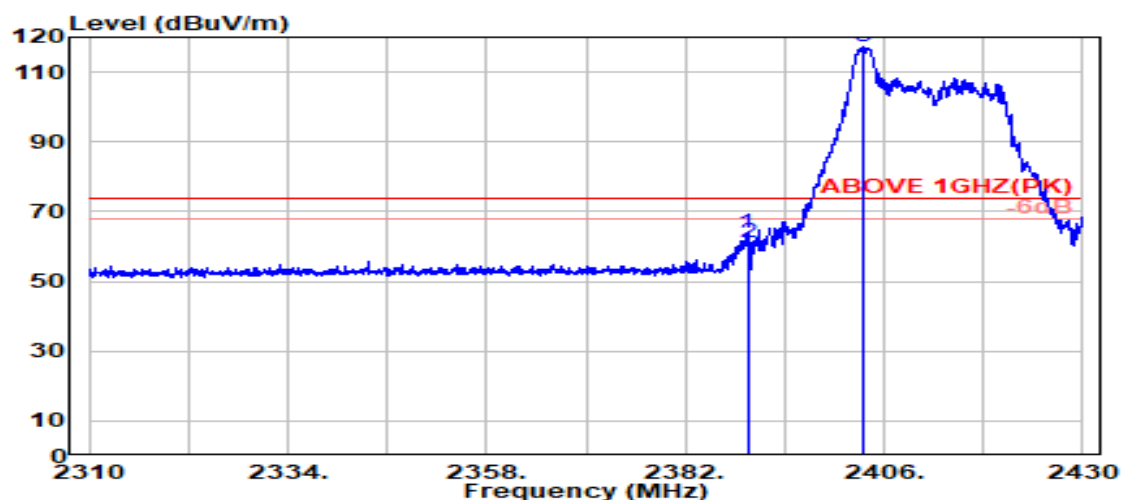

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	69.73	63.71	74.00	10.29	Peak
2389.800	28.14	5.72	39.88	67.00	60.99	74.00	13.01	Peak
@ 2403.500	28.11	5.74	39.88	123.44	117.41	---	---	Peak

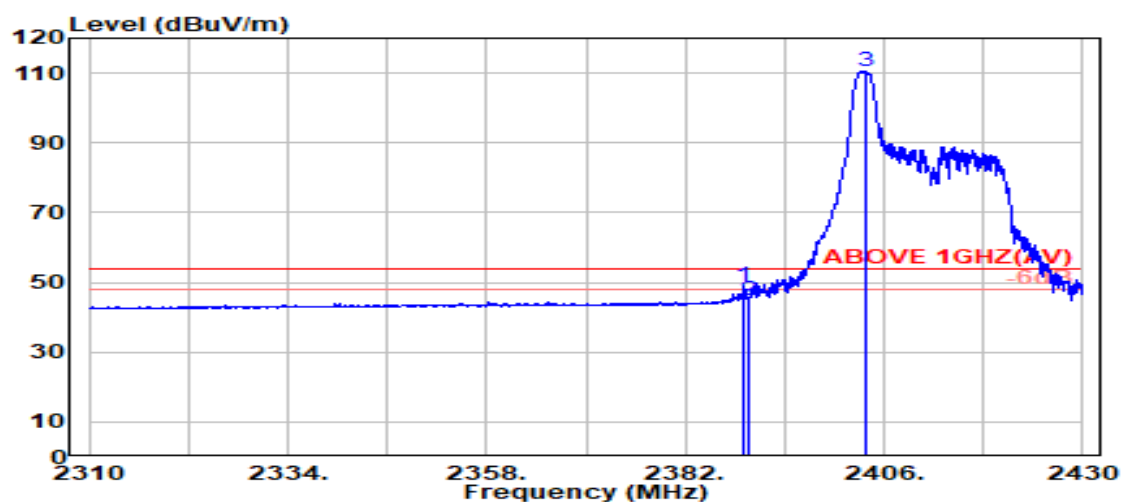

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.14	5.72	39.88	54.74	48.72	54.00	5.28	Average
2389.800	28.14	5.72	39.88	50.88	44.86	54.00	9.14	Average
@ 2403.950	28.12	5.74	39.88	116.46	110.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

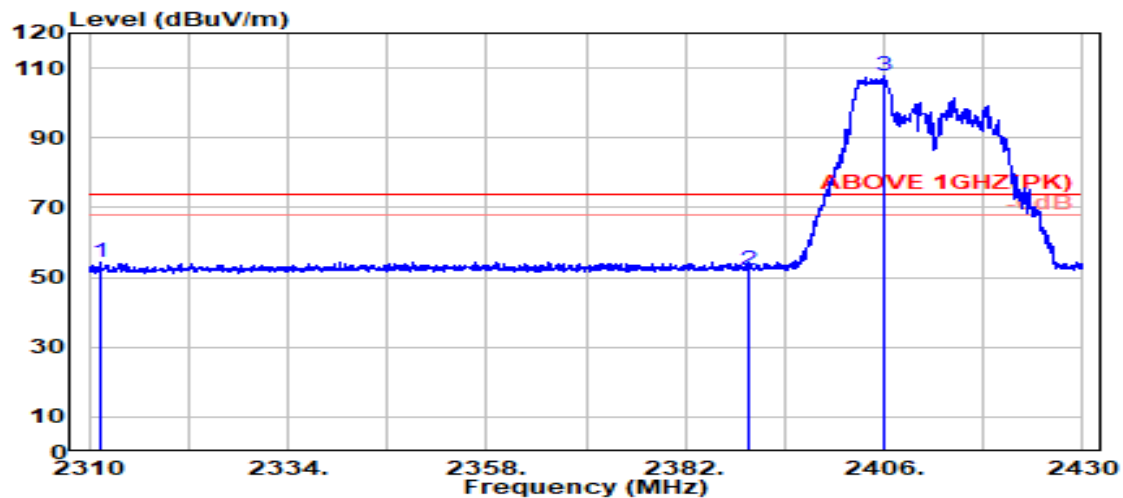

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2311.300	28.07	5.62	39.88	60.52	54.33	74.00	19.67	Peak
2389.800	28.14	5.72	39.88	58.24	52.22	74.00	21.78	Peak
@ 2406.150	28.12	5.74	39.88	113.89	107.88	---	---	Peak

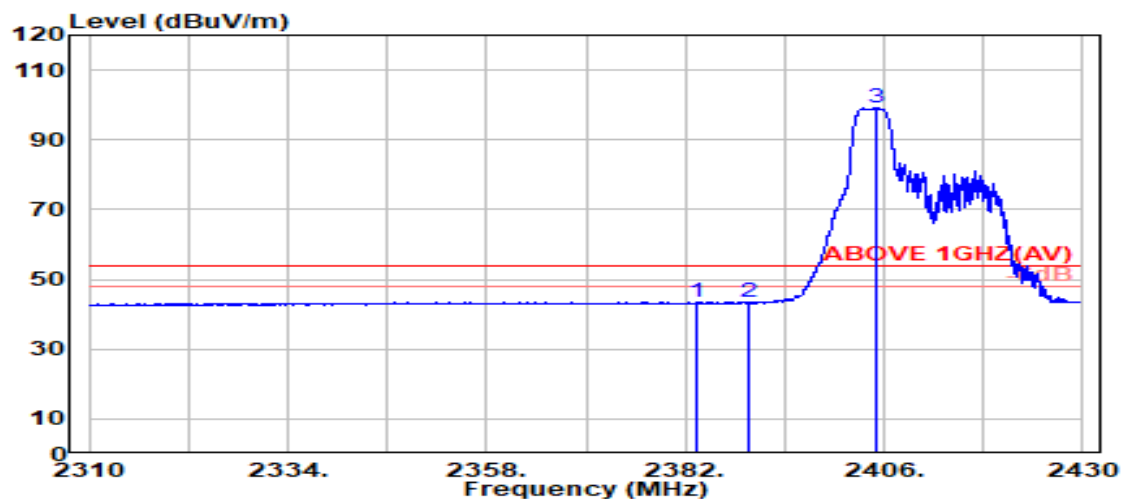

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2383.400	28.17	5.71	39.88	49.60	43.61	54.00	10.39	Average
2389.800	28.14	5.72	39.88	49.47	43.45	54.00	10.55	Average
@ 2405.200	28.12	5.74	39.88	105.20	99.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

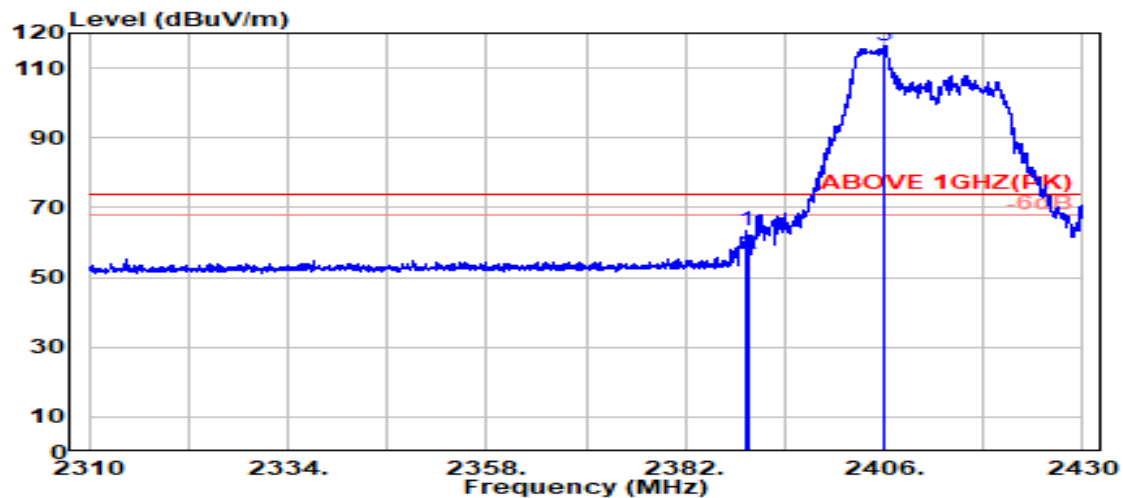

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	69.31	63.29	74.00	10.71	Peak
2389.800	28.14	5.72	39.88	62.46	56.44	74.00	17.56	Peak
@ 2406.150	28.12	5.74	39.88	122.50	116.49	---	---	Peak

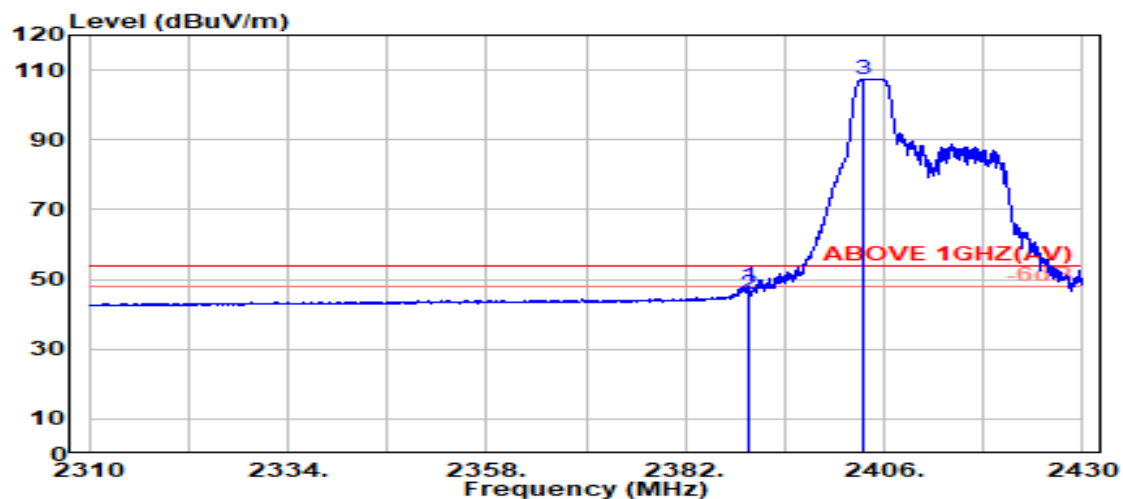

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	54.03	48.01	54.00	5.99	Average
2389.800	28.14	5.72	39.88	51.77	45.75	54.00	8.25	Average
@ 2403.600	28.11	5.74	39.88	113.57	107.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

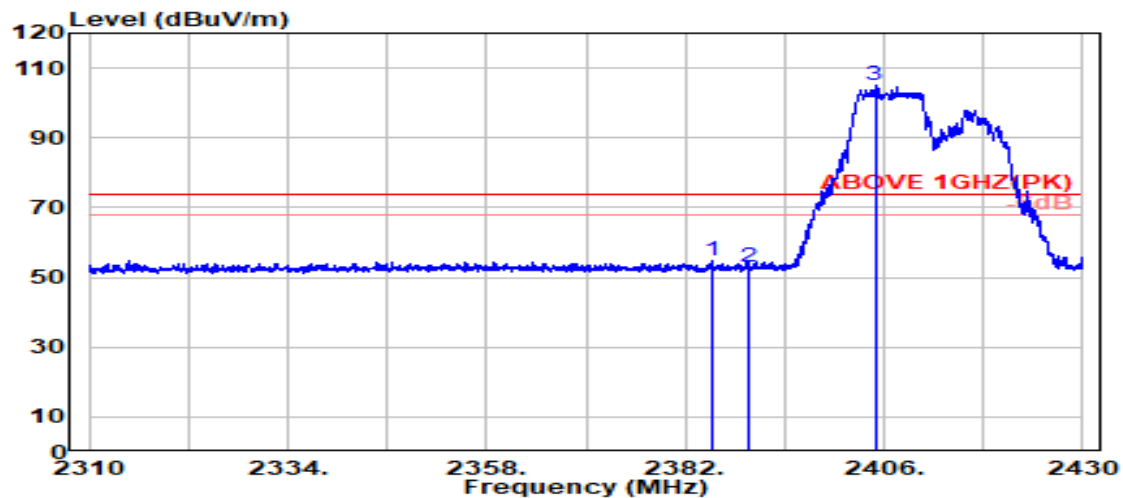

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.150	28.16	5.72	39.88	60.86	54.85	74.00	19.15	Peak
2389.800	28.14	5.72	39.88	58.83	52.82	74.00	21.18	Peak
@ 2404.900	28.12	5.74	39.88	111.18	105.16	---	---	Peak

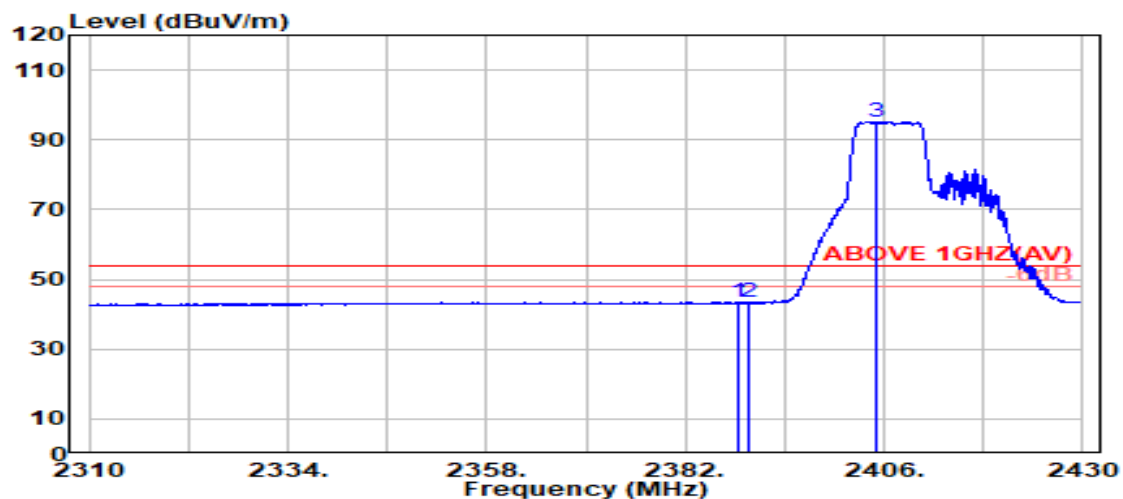

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.450	28.15	5.72	39.88	49.62	43.61	54.00	10.39	Average
2389.800	28.14	5.72	39.88	49.54	43.53	54.00	10.47	Average
@ 2404.950	28.12	5.74	39.88	101.20	95.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

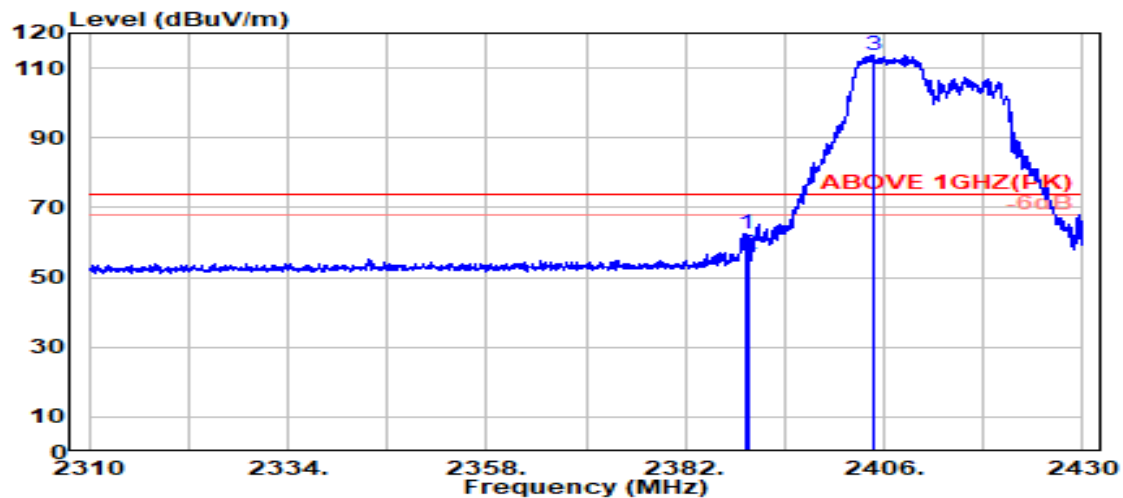

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	68.57	62.56	74.00	11.44	Peak
2389.800	28.14	5.72	39.88	62.45	56.44	74.00	17.56	Peak
@ 2404.600	28.12	5.74	39.88	119.78	113.76	---	---	Peak

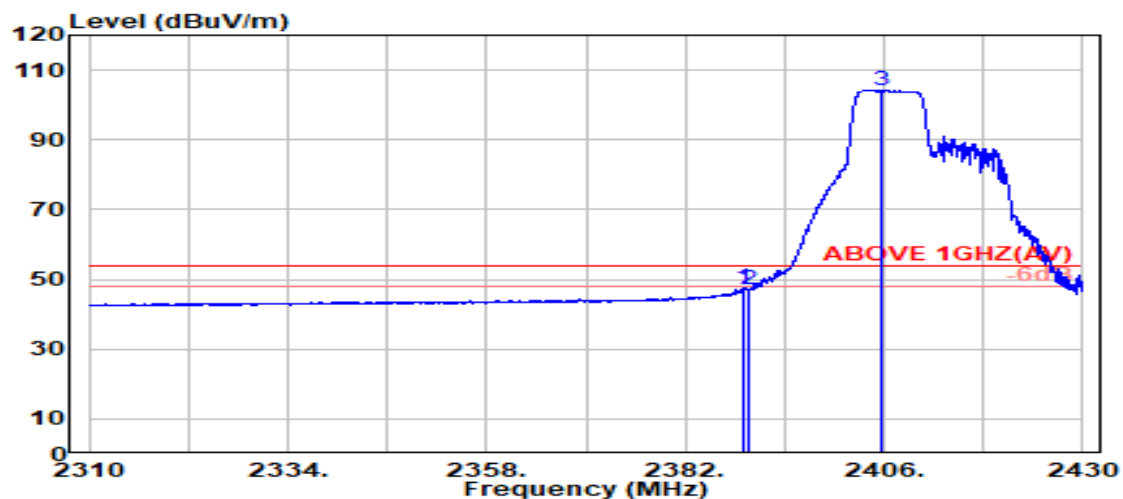

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	53.53	47.51	54.00	6.49	Average
2389.800	28.14	5.72	39.88	53.19	47.17	54.00	6.83	Average
@ 2405.800	28.12	5.74	39.88	110.35	104.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

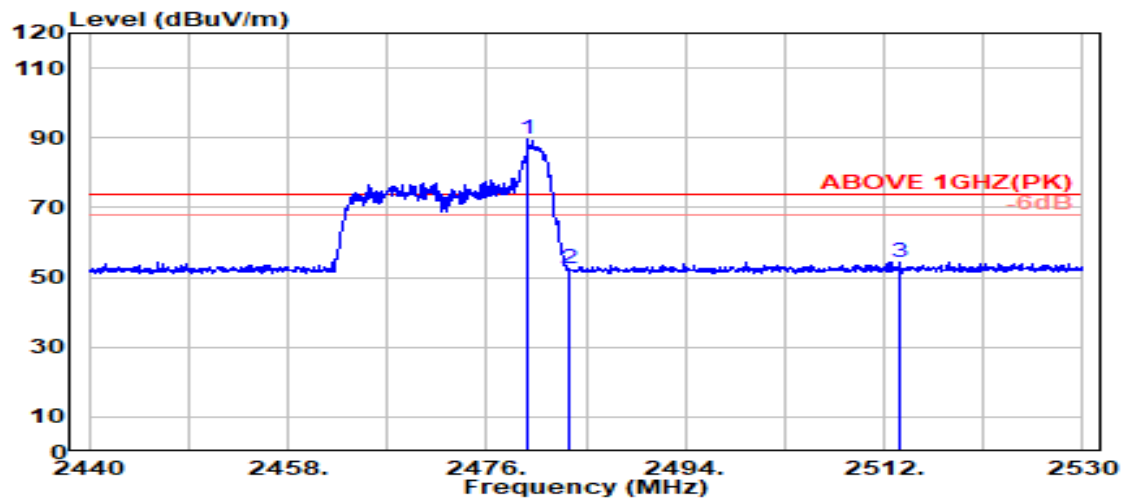

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2479.800	28.36	5.83	39.87	95.17	89.48	---	---	Peak
	2483.500	28.37	5.83	39.87	58.02	52.35	74.00	21.65	Peak
	2513.400	28.48	5.87	39.87	59.96	54.44	74.00	19.56	Peak

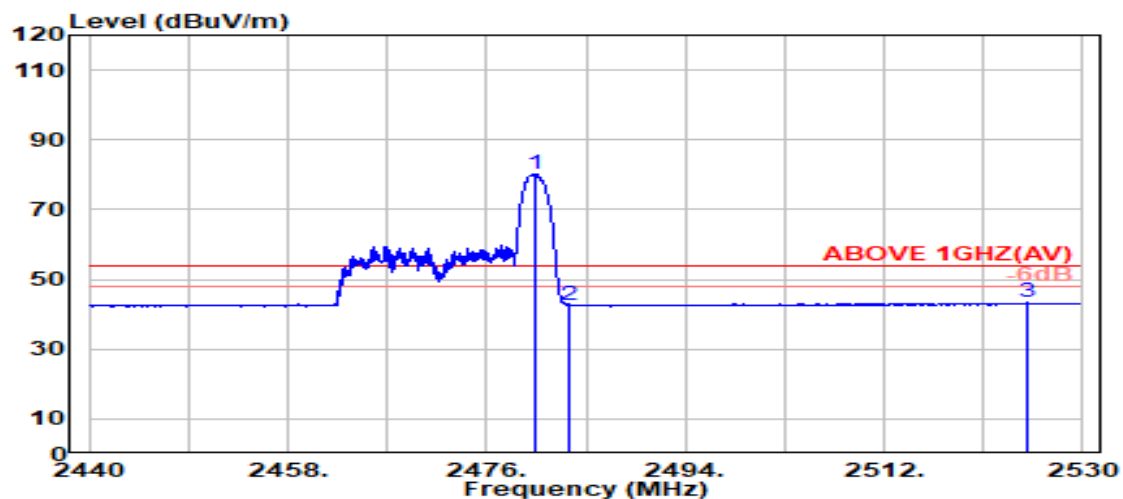

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.500	28.36	5.83	39.87	85.72	80.03	---	---	Average
	2483.500	28.37	5.83	39.87	48.45	42.78	54.00	11.22	Average
	2524.950	28.55	5.88	39.88	48.81	43.37	54.00	10.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

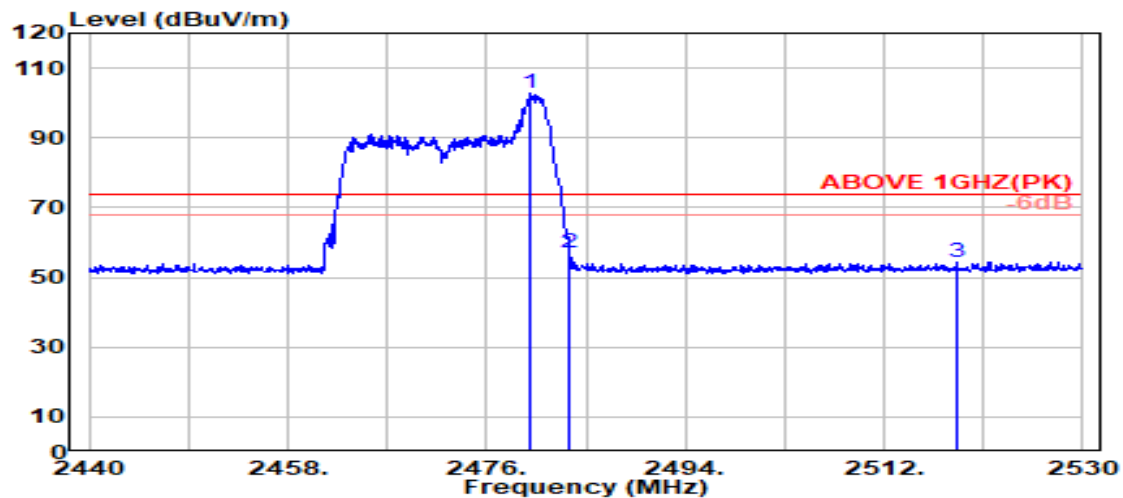

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.36	5.83	39.87	108.41	102.73	---	---	Peak
2483.500	28.37	5.83	39.87	62.71	57.04	74.00	16.96	Peak
2518.600	28.51	5.87	39.88	59.94	54.45	74.00	19.55	Peak

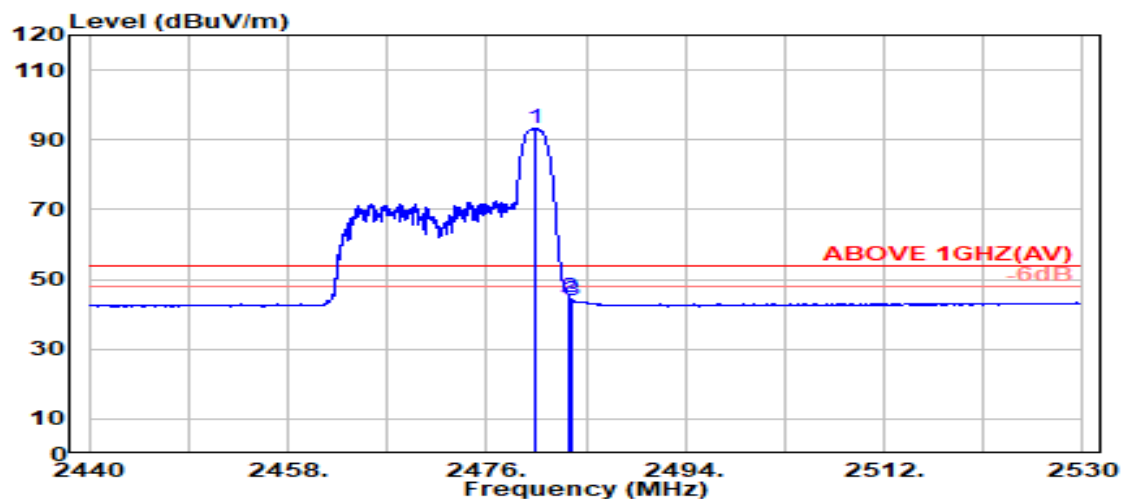

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.36	5.83	39.87	98.99	93.30	---	---	Average
2483.500	28.37	5.83	39.87	50.41	44.73	54.00	9.27	Average
2483.700	28.37	5.83	39.87	49.57	43.90	54.00	10.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

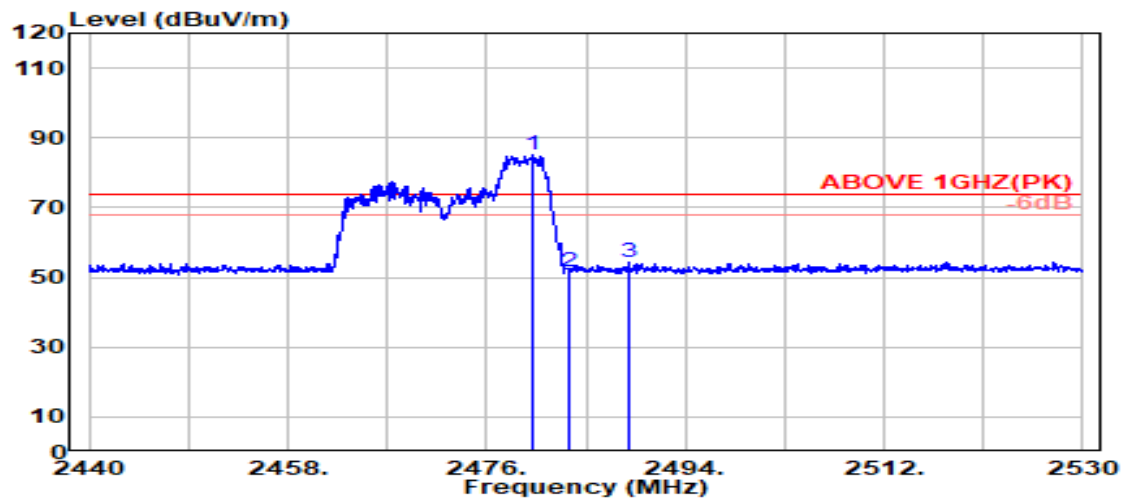

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.83	39.87	91.01	85.32	---	---	Peak
2483.500	28.37	5.83	39.87	57.43	51.76	74.00	22.24	Peak
2488.900	28.38	5.84	39.87	59.89	54.23	74.00	19.77	Peak

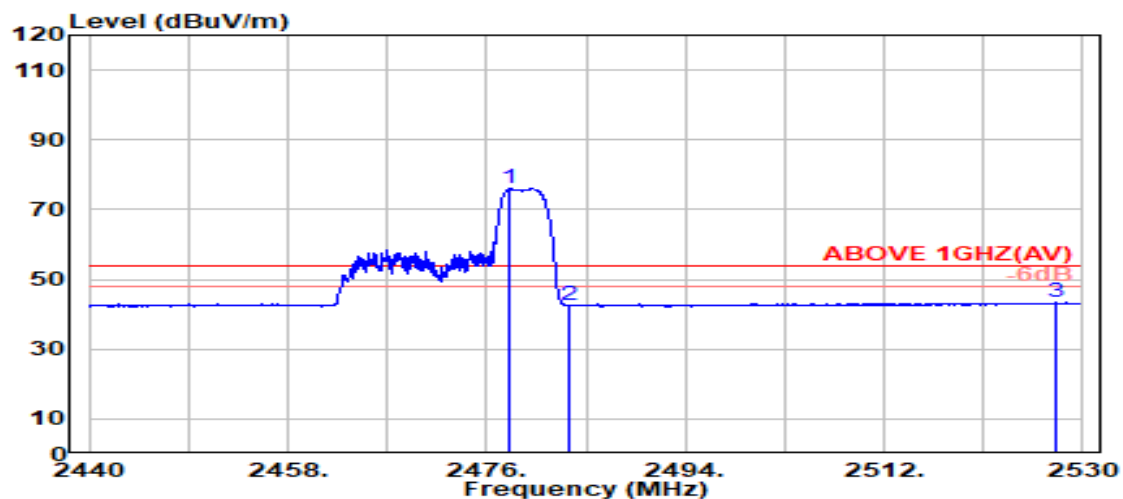

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.000	28.36	5.82	39.87	81.80	76.11	---	---	Average
2483.500	28.37	5.83	39.87	48.37	42.70	54.00	11.30	Average
2527.500	28.57	5.88	39.88	48.75	43.32	54.00	10.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

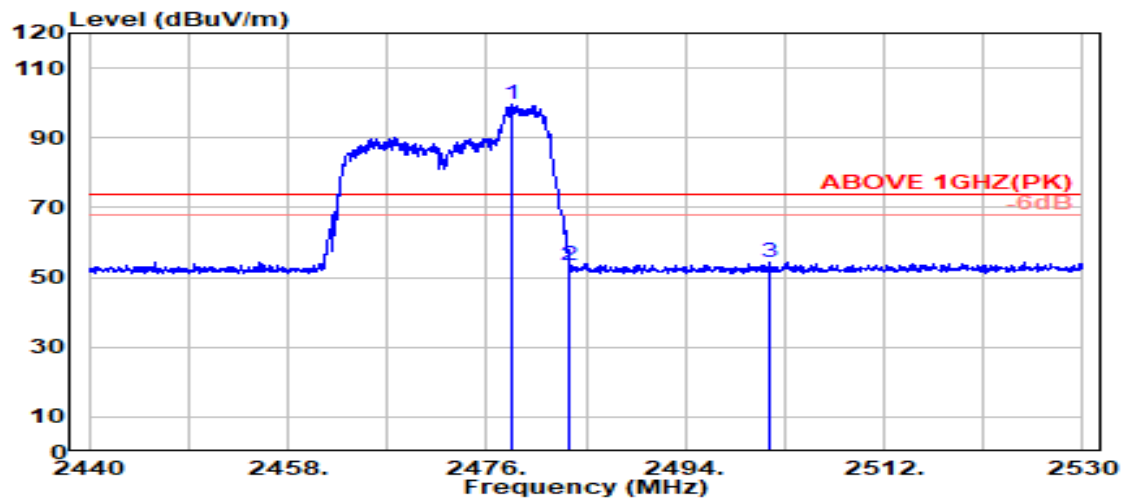

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.200	28.36	5.82	39.87	105.44	99.75	---	---	Peak
2483.500	28.37	5.83	39.87	59.21	53.54	74.00	20.46	Peak
2501.650	28.41	5.85	39.87	59.79	54.18	74.00	19.82	Peak

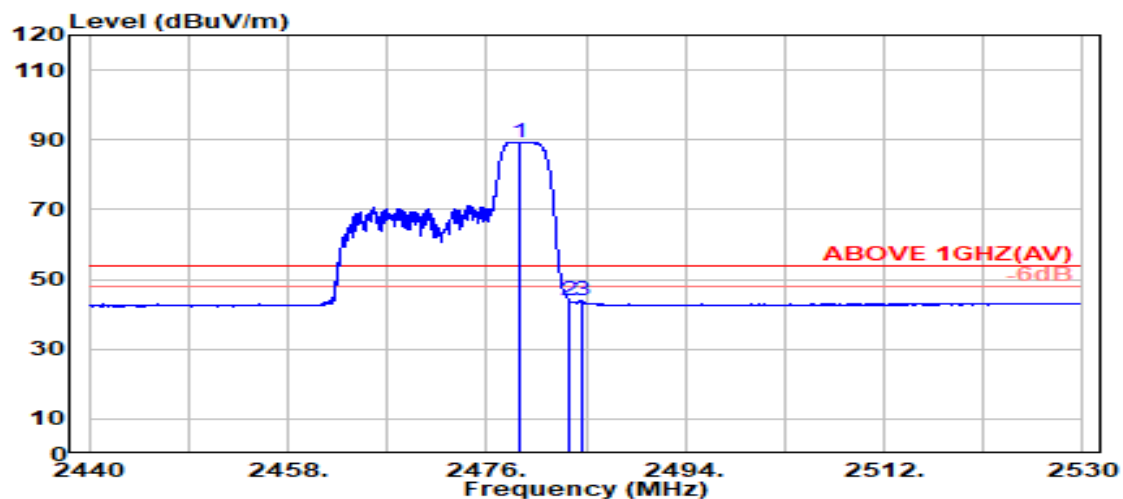

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.36	5.83	39.87	95.06	89.37	---	---	Average
2483.500	28.37	5.83	39.87	49.61	43.94	54.00	10.06	Average
2484.550	28.37	5.83	39.87	49.51	43.84	54.00	10.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

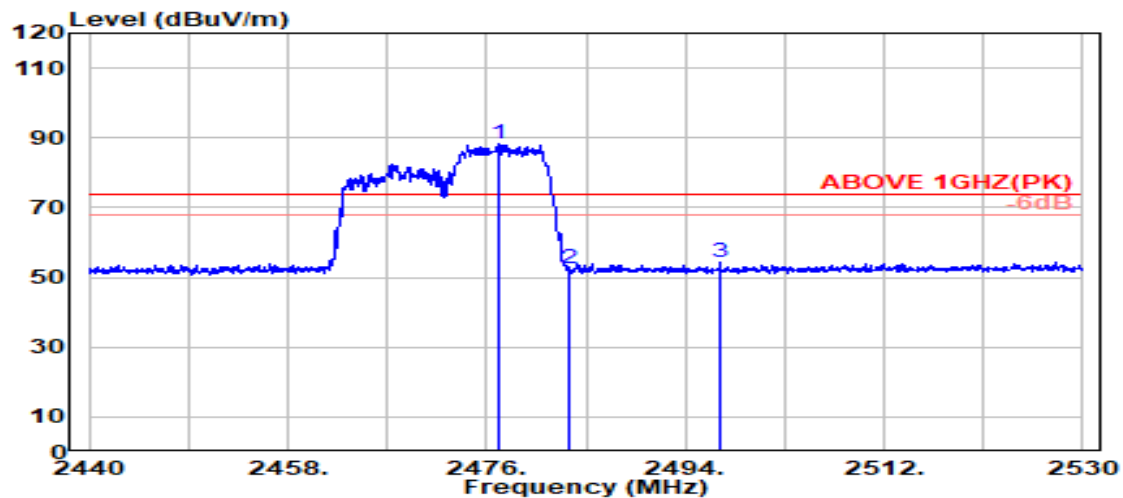

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.050	28.35	5.82	39.87	94.07	88.38	---	---	Peak
2483.500	28.37	5.83	39.87	58.19	52.51	74.00	21.49	Peak
2497.200	28.39	5.85	39.87	60.08	54.45	74.00	19.55	Peak

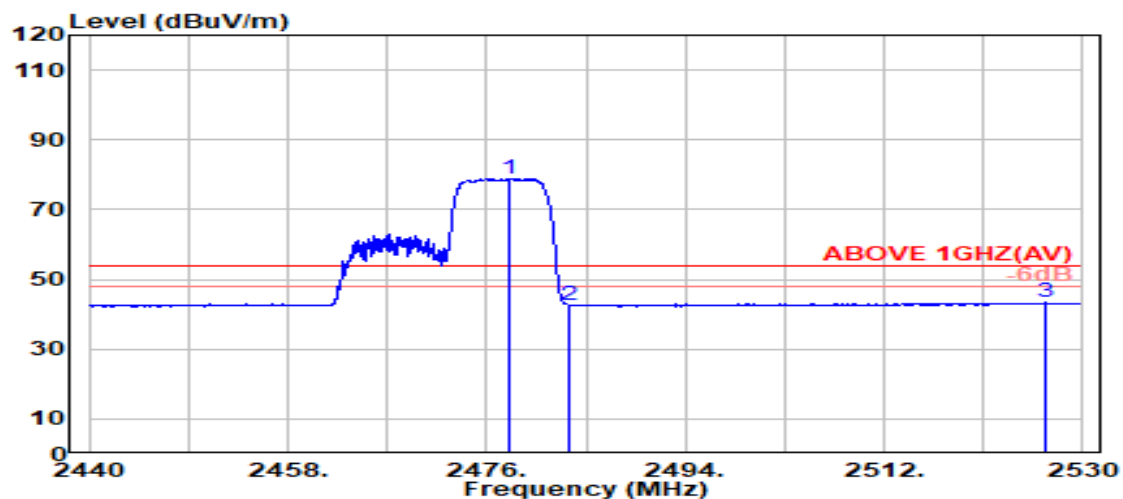

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.150	28.36	5.82	39.87	84.53	78.84	---	---	Average
2483.500	28.37	5.83	39.87	48.39	42.72	54.00	11.28	Average
2526.700	28.56	5.88	39.88	48.83	43.40	54.00	10.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

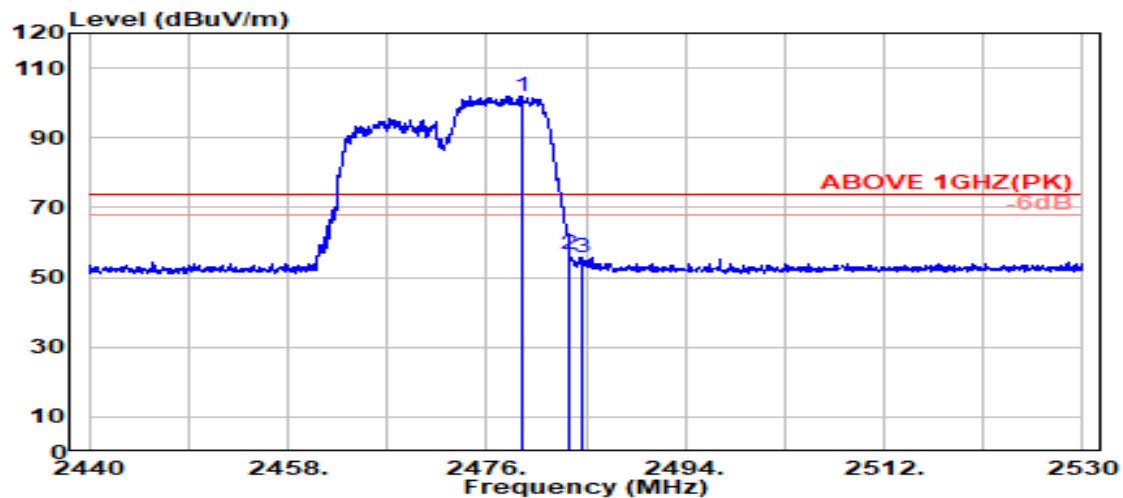

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.36	5.83	39.87	107.61	101.92	---	---	Peak
2483.500	28.37	5.83	39.87	62.17	56.50	74.00	17.50	Peak
2484.700	28.37	5.83	39.87	61.59	55.92	74.00	18.08	Peak

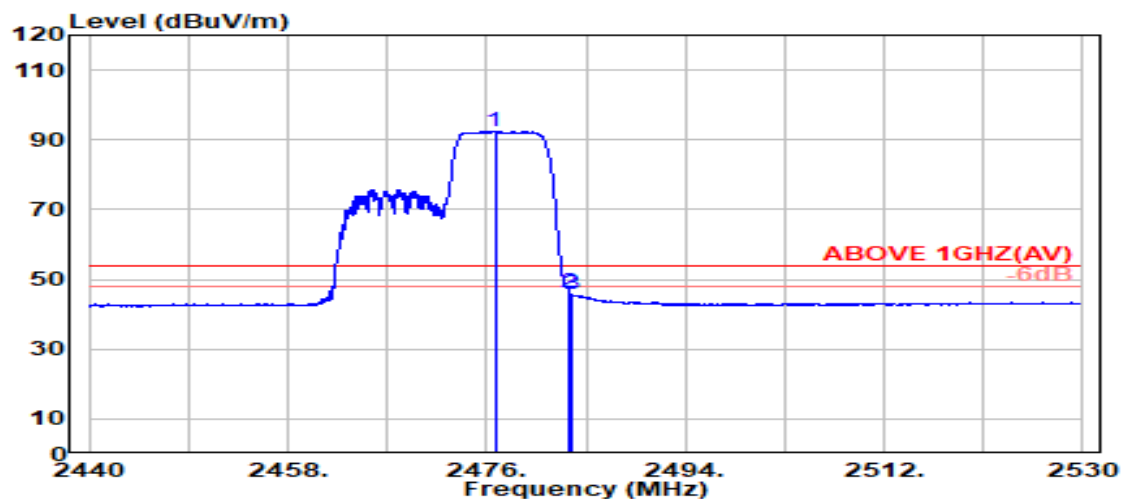

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.750	28.35	5.82	39.87	97.96	92.27	---	---	Average
2483.500	28.37	5.83	39.87	51.72	46.04	54.00	7.96	Average
2483.750	28.37	5.83	39.87	51.39	45.72	54.00	8.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

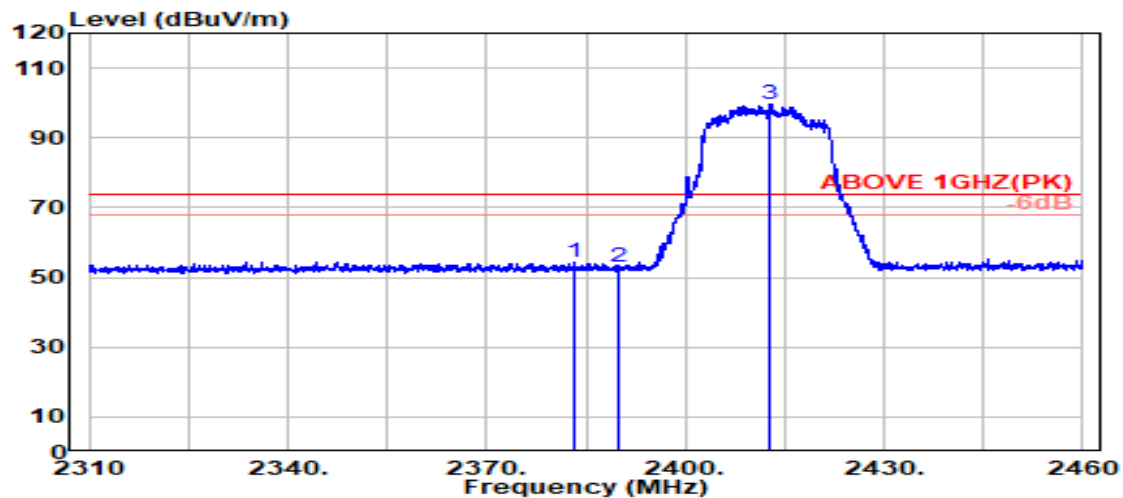

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2383.150	28.17	5.71	39.88	60.38	54.38	74.00	19.62	Peak
2389.800	28.14	5.72	39.88	59.01	52.99	74.00	21.01	Peak
@ 2412.850	28.15	5.75	39.88	105.78	99.80	---	---	Peak

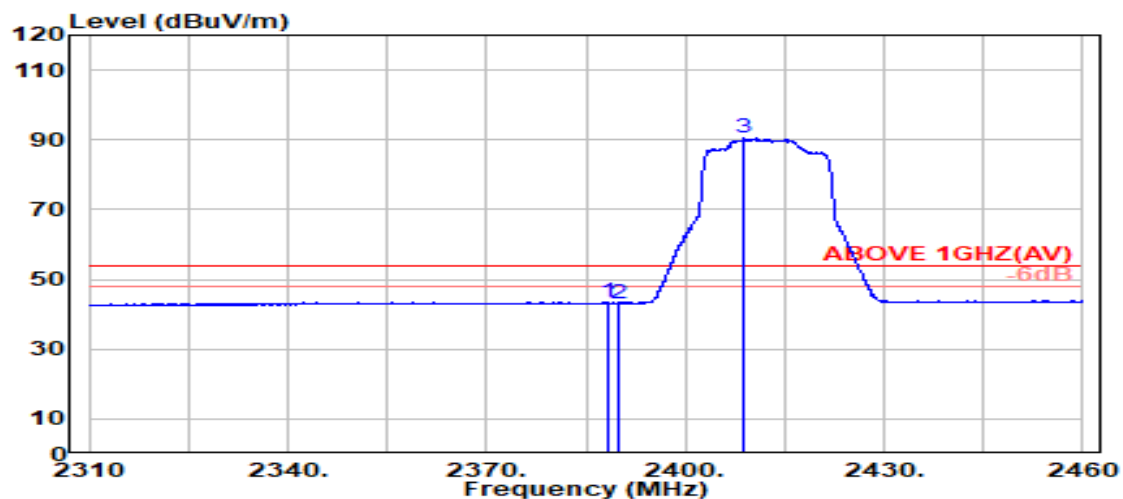

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.250	28.15	5.72	39.88	49.57	43.56	54.00	10.44	Average
2389.800	28.14	5.72	39.88	49.11	43.09	54.00	10.91	Average
@ 2408.850	28.14	5.74	39.88	96.48	90.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

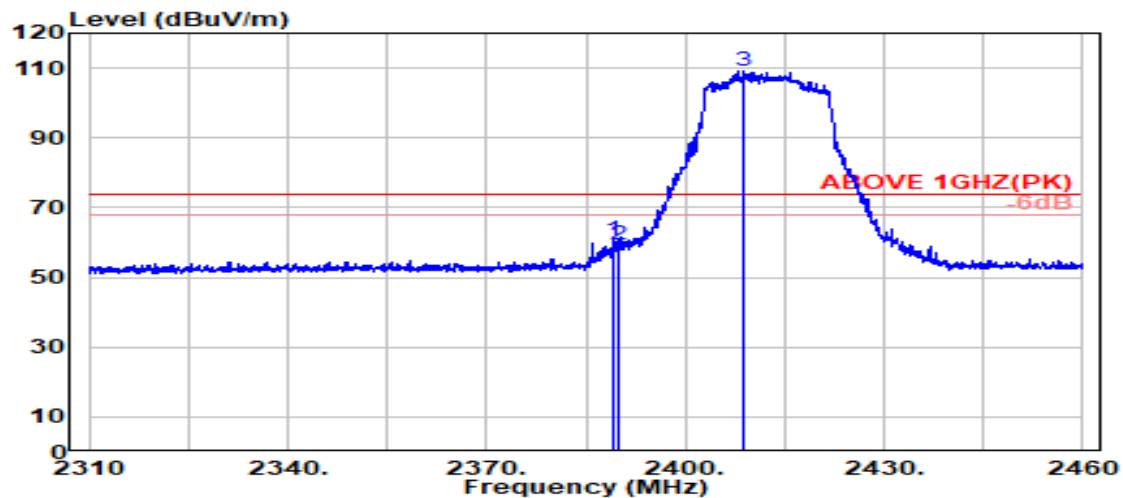

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.050	28.14	5.72	39.88	66.74	60.72	74.00	13.28	Peak
2389.800	28.14	5.72	39.88	65.41	59.40	74.00	14.60	Peak
@ 2408.700	28.14	5.74	39.88	115.24	109.25	---	---	Peak

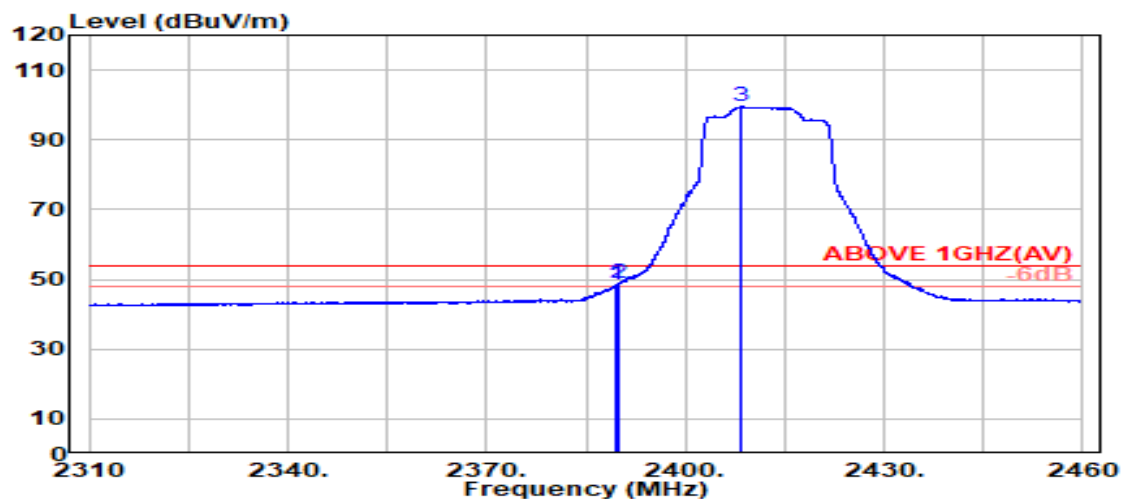

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	54.63	48.61	54.00	5.39	Average
2389.800	28.14	5.72	39.88	54.71	48.69	54.00	5.31	Average
@ 2408.550	28.13	5.74	39.88	105.58	99.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

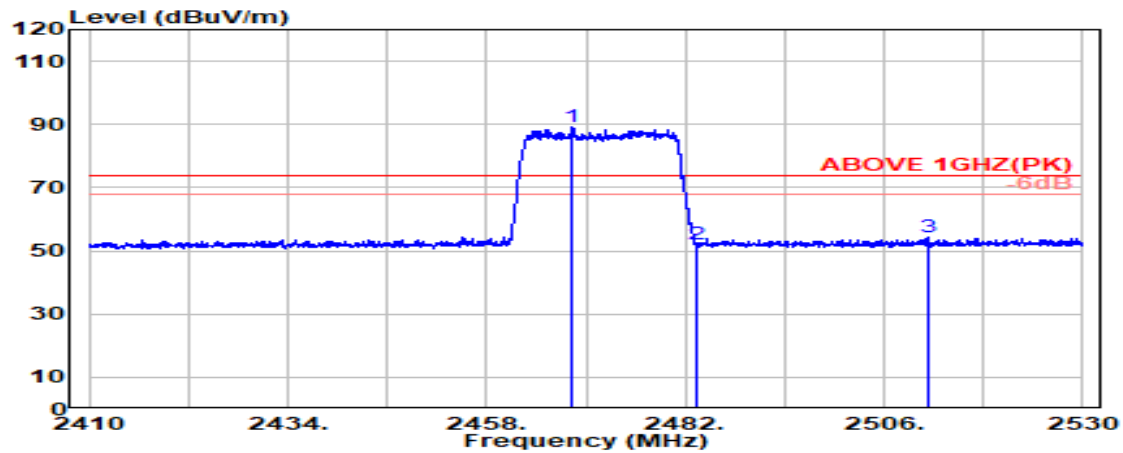

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	28.34	5.81	39.87	94.76	89.04	---	---	Peak
2483.500	28.37	5.83	39.87	57.60	51.93	74.00	22.07	Peak
2511.200	28.47	5.86	39.87	59.70	54.15	74.00	19.85	Peak

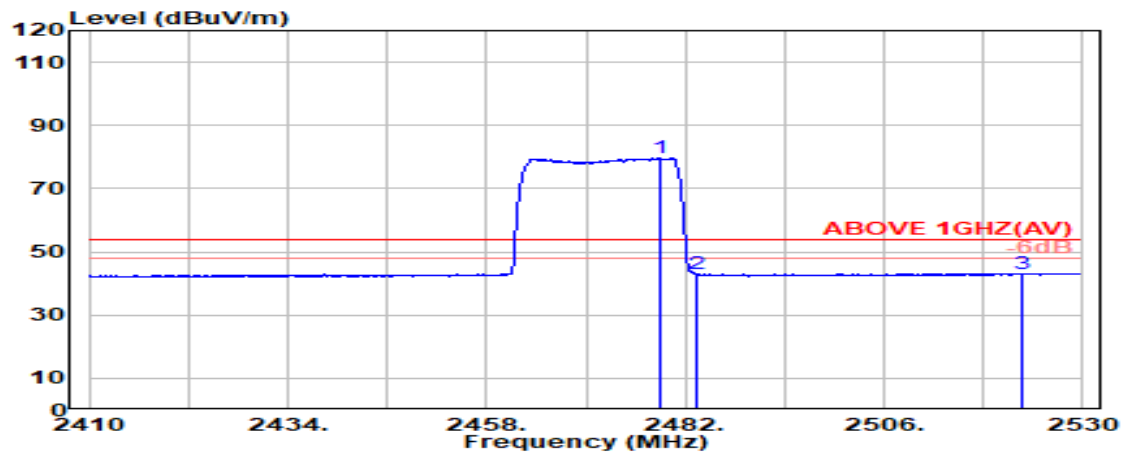

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.850	28.36	5.83	39.87	85.37	79.68	---	---	Average
2483.500	28.37	5.83	39.87	48.57	42.90	54.00	11.10	Average
2522.650	28.54	5.88	39.88	48.69	43.23	54.00	10.77	Average

備註：“@”為主波，在此章節是不予以判定

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

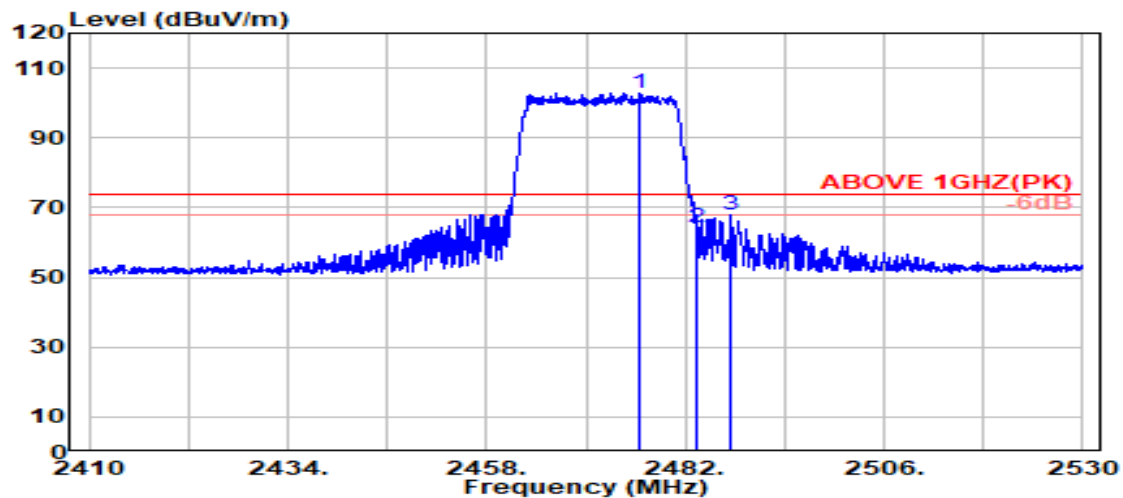

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.450	28.35	5.82	39.87	108.50	102.80	---	---	Peak
2483.500	28.37	5.83	39.87	70.07	64.40	74.00	9.60	Peak
2487.450	28.38	5.84	39.87	73.49	67.83	74.00	6.17	Peak

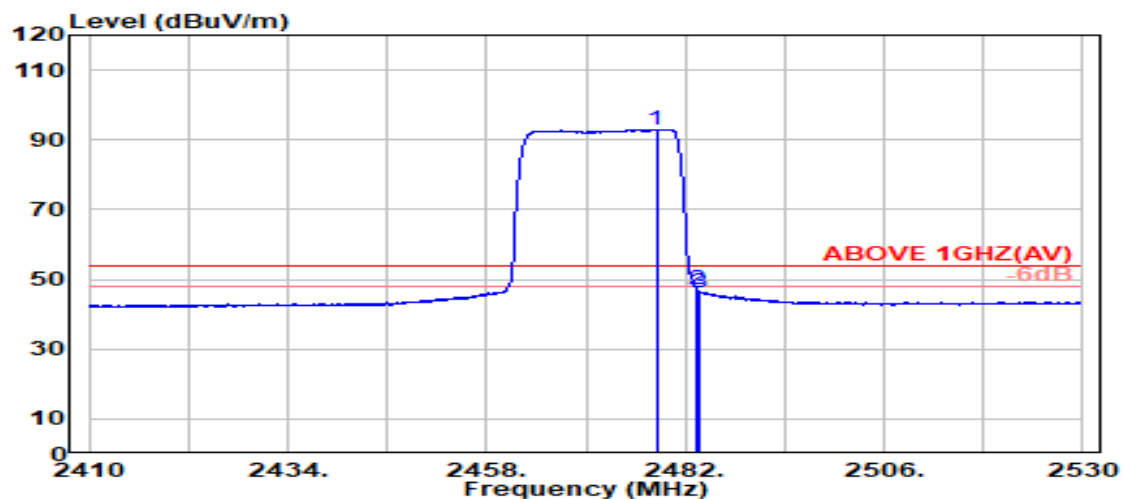

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.500	28.36	5.83	39.87	98.56	92.87	---	---	Average
2483.500	28.37	5.83	39.87	52.72	47.05	54.00	6.95	Average
2483.750	28.37	5.83	39.87	52.06	46.38	54.00	7.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

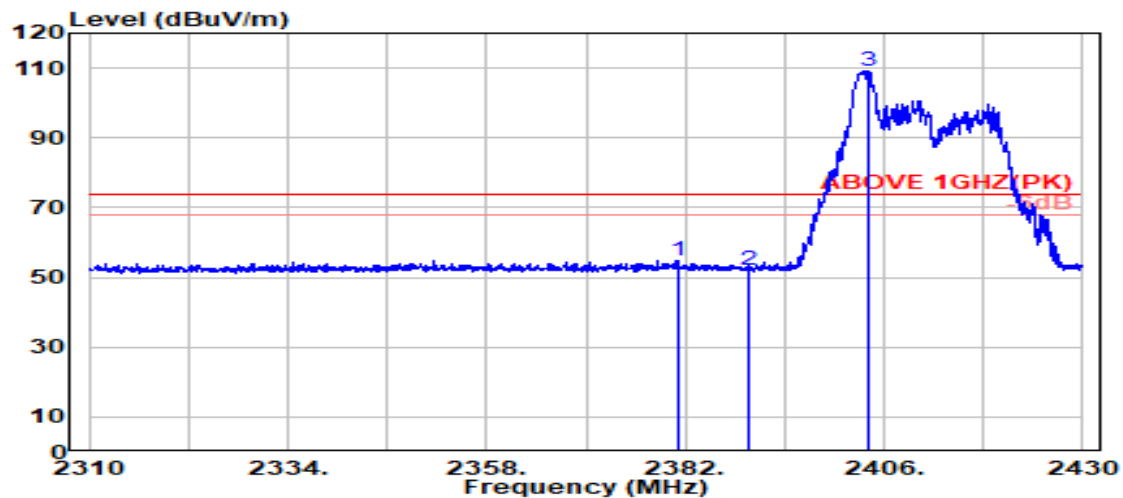

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.050	28.18	5.71	39.88	60.66	54.66	74.00	19.34	Peak
2389.800	28.14	5.72	39.88	58.09	52.07	74.00	21.93	Peak
@ 2404.250	28.12	5.74	39.88	115.30	109.27	---	---	Peak

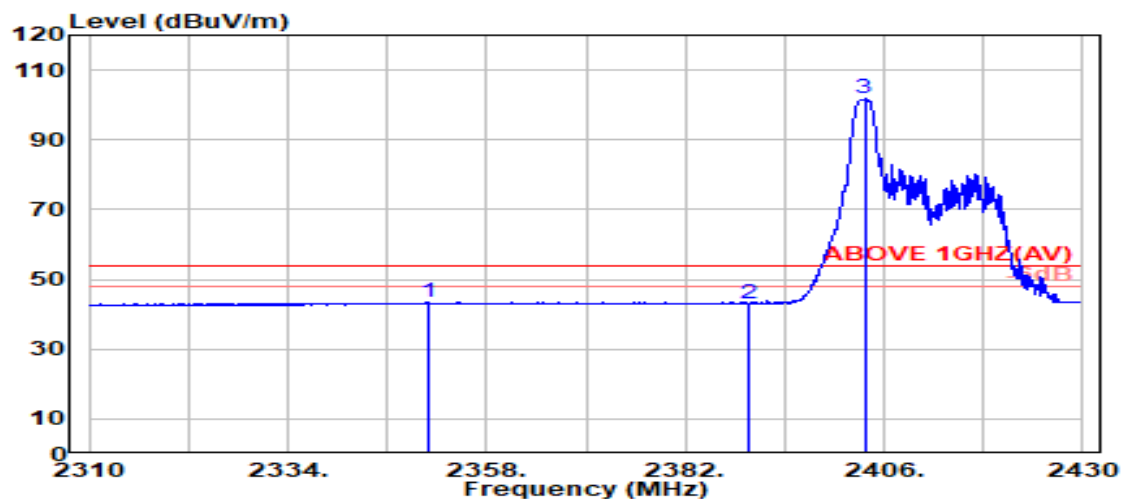

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2350.850	28.30	5.67	39.88	49.56	43.65	54.00	10.36	Average
2389.800	28.14	5.72	39.88	49.19	43.17	54.00	10.83	Average
@ 2403.650	28.11	5.74	39.88	107.69	101.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

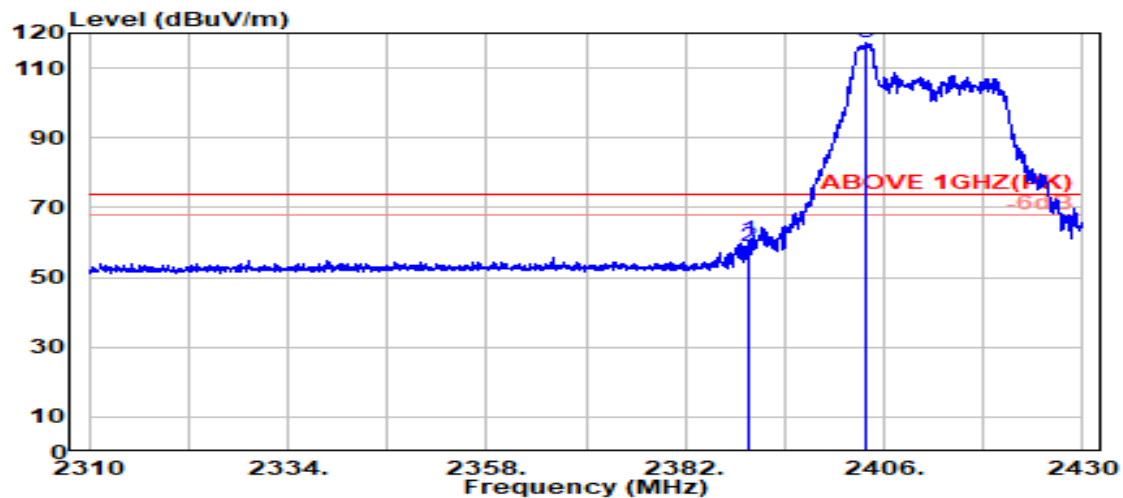

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	66.79	60.78	74.00	13.22	Peak
2389.800	28.14	5.72	39.88	65.10	59.08	74.00	14.92	Peak
@ 2403.800	28.12	5.74	39.88	123.20	117.18	---	---	Peak

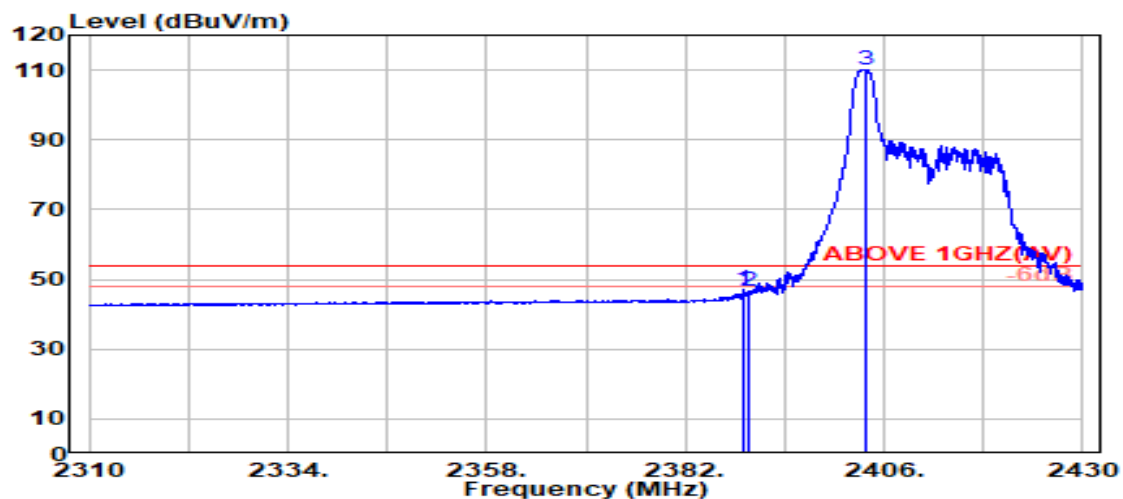

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	52.98	46.97	54.00	7.03	Average
2389.800	28.14	5.72	39.88	52.49	46.47	54.00	7.53	Average
@ 2403.850	28.12	5.74	39.88	116.26	110.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

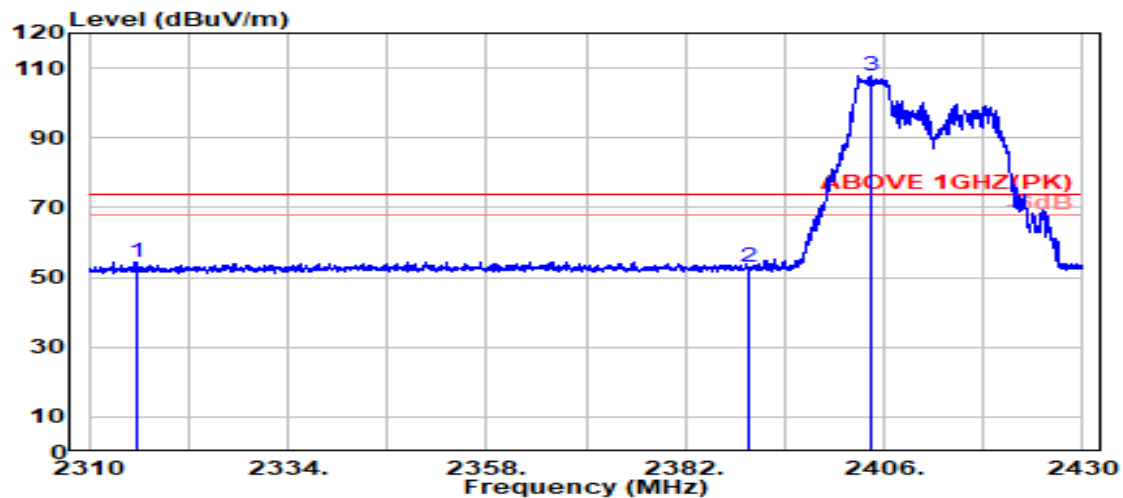

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2315.650	28.09	5.63	39.88	60.60	54.44	74.00	19.56	Peak
2389.800	28.14	5.72	39.88	58.84	52.82	74.00	21.18	Peak
@ 2404.350	28.12	5.74	39.88	113.70	107.68	---	---	Peak

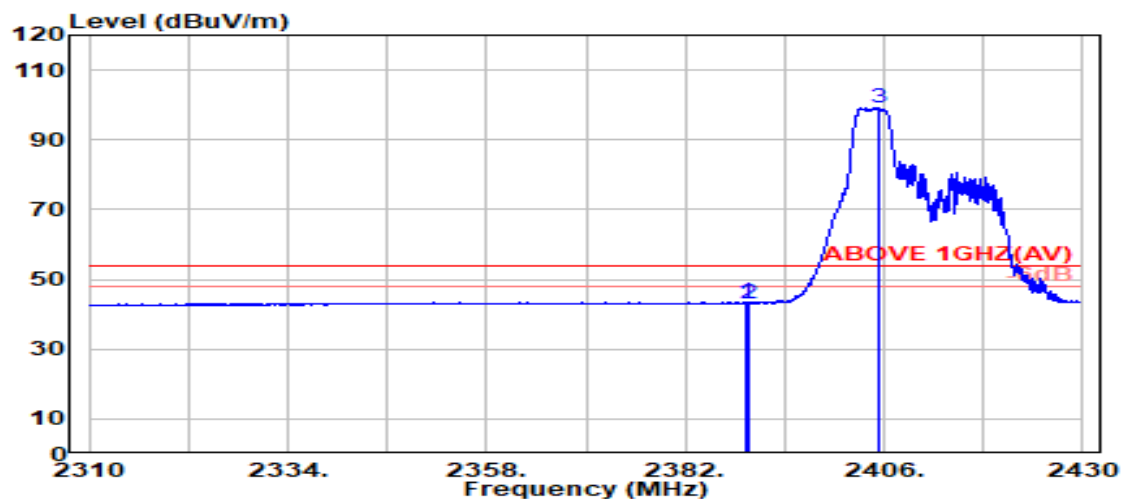

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	49.45	43.43	54.00	10.57	Average
2389.800	28.14	5.72	39.88	49.17	43.15	54.00	10.85	Average
@ 2405.250	28.12	5.74	39.88	105.14	99.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

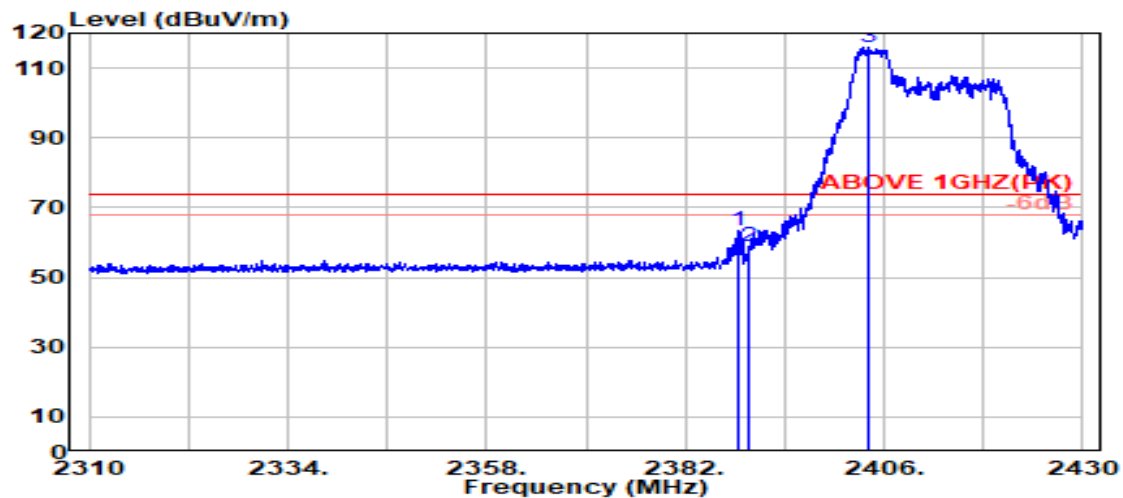

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.88	69.19	63.18	74.00	10.82	Peak
2389.800	28.14	5.72	39.88	64.75	58.73	74.00	15.27	Peak
@ 2404.200	28.12	5.74	39.88	122.13	116.11	---	---	Peak

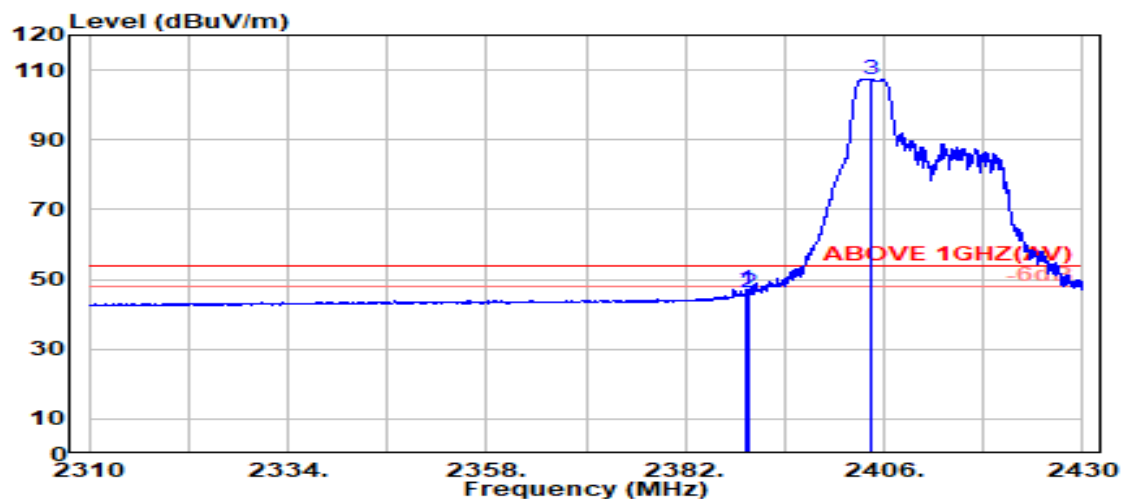

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	53.16	47.14	54.00	6.86	Average
2389.800	28.14	5.72	39.88	52.26	46.24	54.00	7.76	Average
@ 2404.500	28.12	5.74	39.88	113.35	107.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

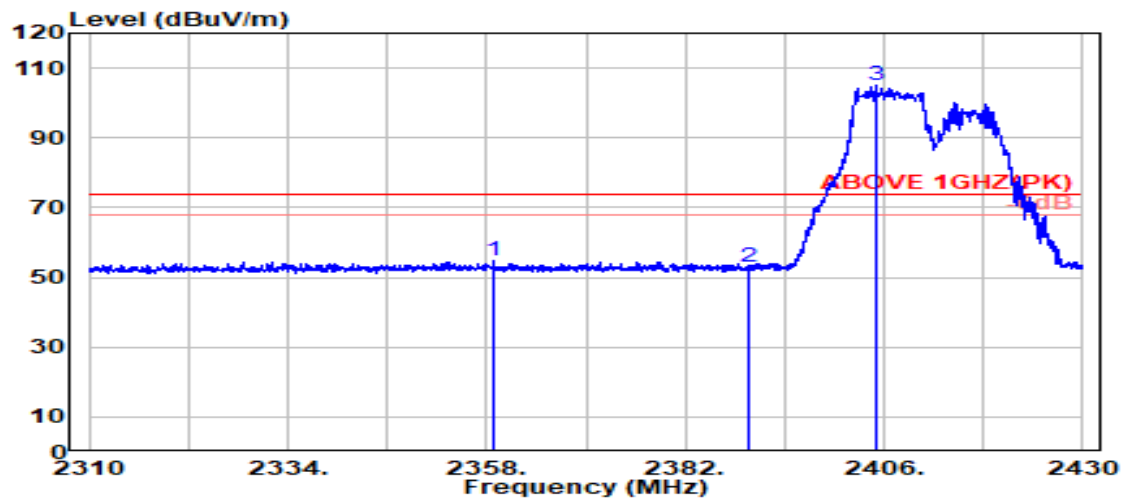

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.900	28.26	5.68	39.88	60.74	54.81	74.00	19.19	Peak
2389.800	28.14	5.72	39.88	59.03	53.01	74.00	20.99	Peak
@ 2405.100	28.12	5.74	39.88	110.89	104.87	---	---	Peak

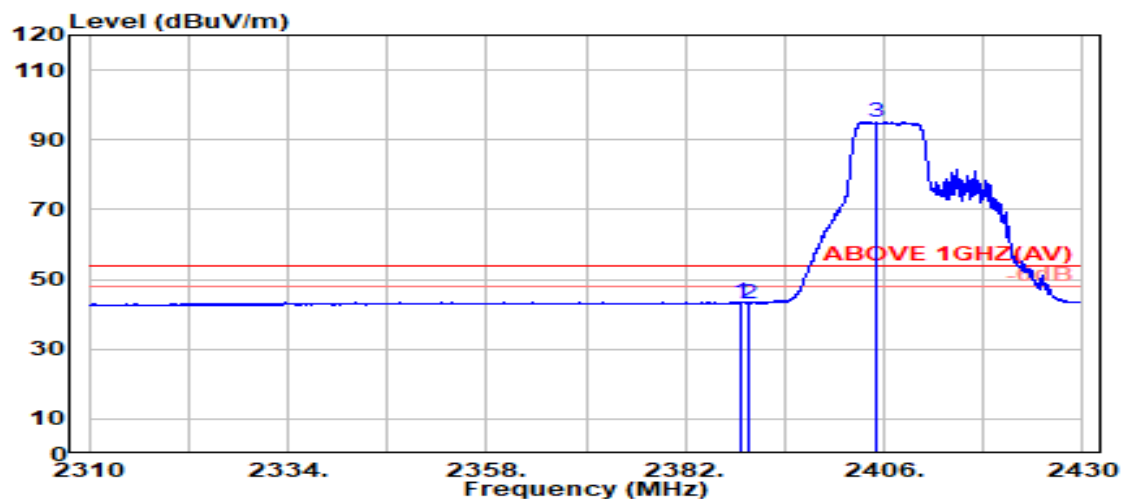

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.14	5.72	39.88	49.64	43.63	54.00	10.37	Average
2389.800	28.14	5.72	39.88	49.22	43.20	54.00	10.80	Average
@ 2405.100	28.12	5.74	39.88	101.14	95.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

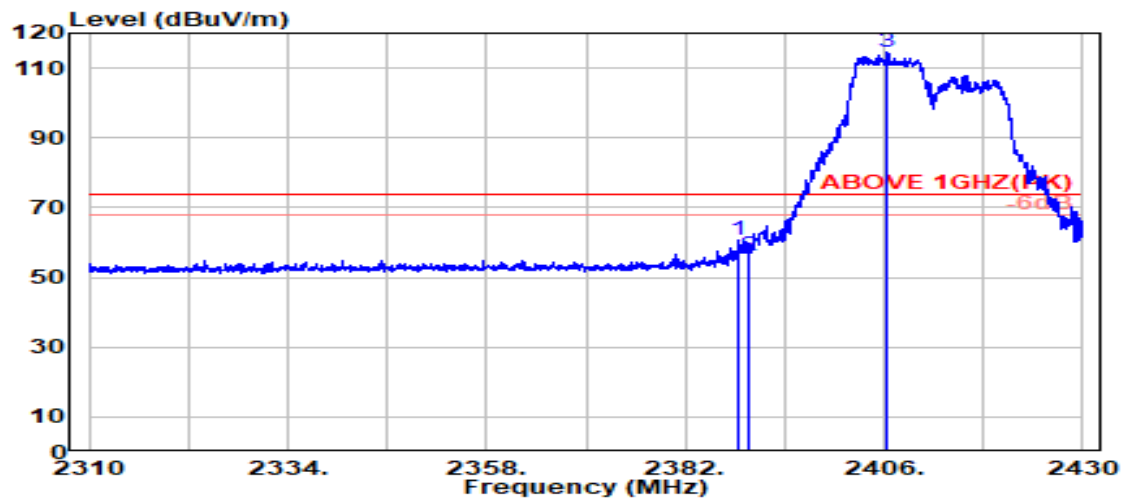

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.350	28.15	5.72	39.88	66.73	60.72	74.00	13.28	Peak
2389.800	28.14	5.72	39.88	61.97	55.96	74.00	18.04	Peak
@ 2406.250	28.13	5.74	39.88	120.70	114.69	---	---	Peak

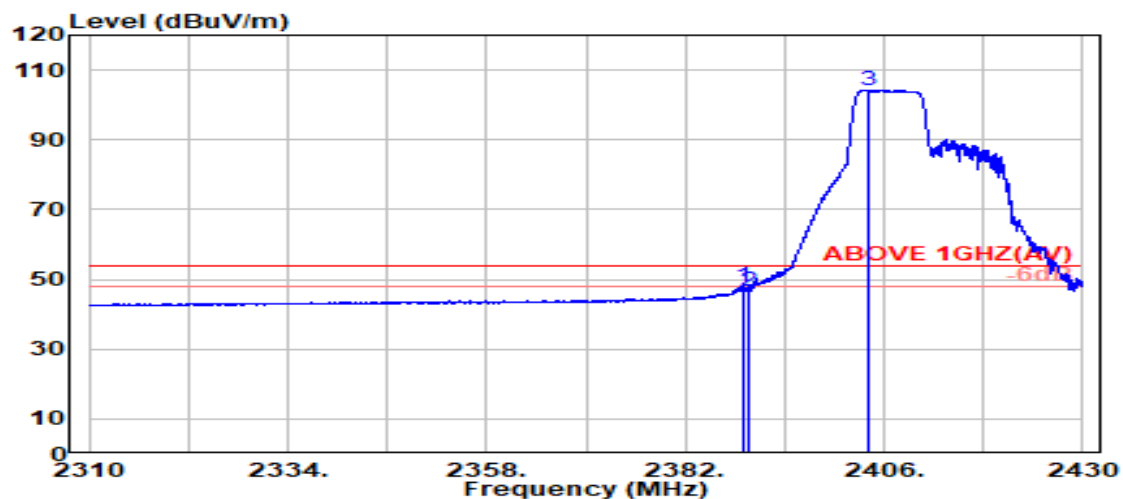

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	54.05	48.03	54.00	5.97	Average
2389.800	28.14	5.72	39.88	52.86	46.85	54.00	7.15	Average
@ 2404.100	28.12	5.74	39.88	110.23	104.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

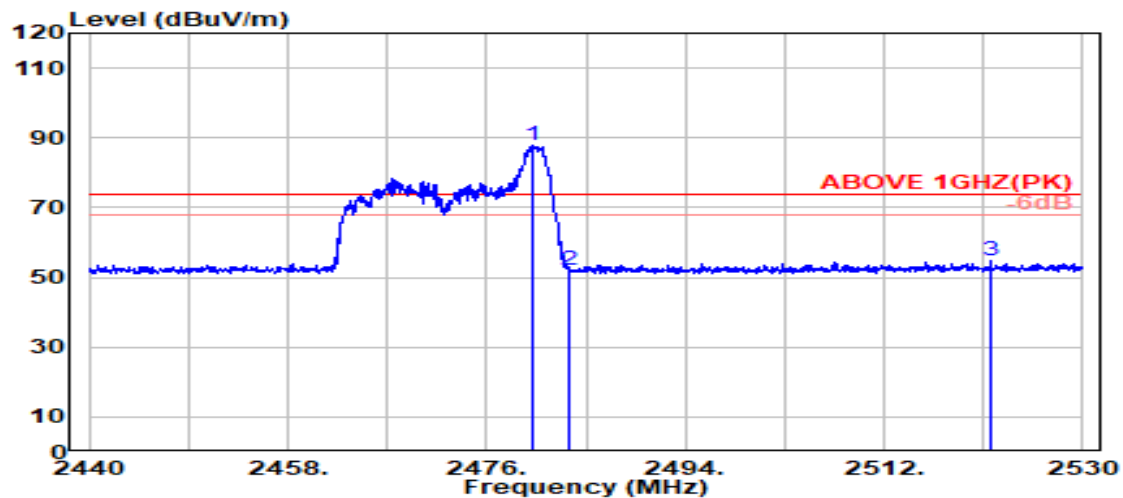

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.36	5.83	39.87	93.36	87.68	---	---	Peak
2483.500	28.37	5.83	39.87	57.76	52.09	74.00	21.91	Peak
2521.650	28.53	5.88	39.88	60.08	54.61	74.00	19.39	Peak

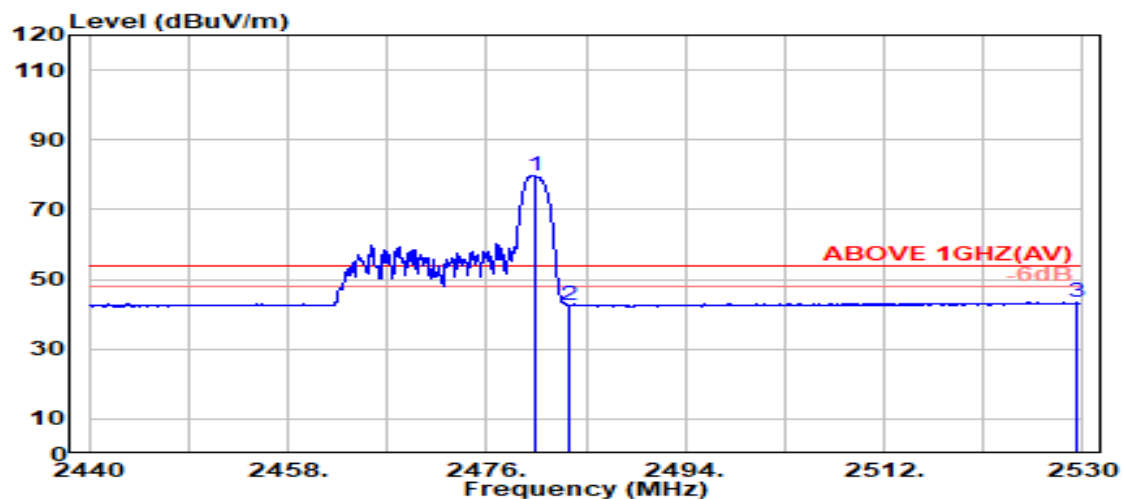

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	85.55	79.87	---	---	Average
2483.500	28.37	5.83	39.87	48.23	42.56	54.00	11.44	Average
2529.350	28.58	5.89	39.88	48.72	43.31	54.00	10.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

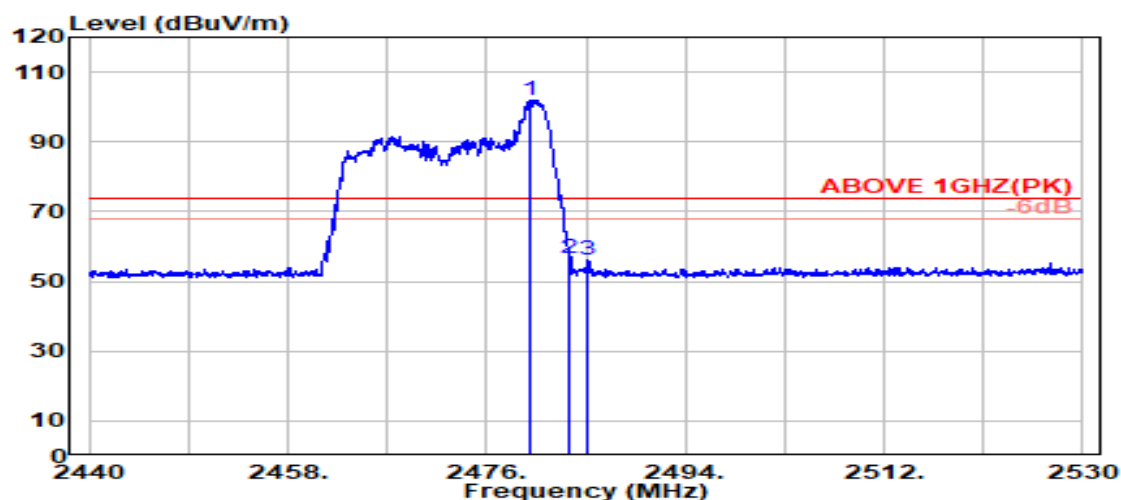

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.36	5.83	39.87	107.74	102.05	---	---	Peak
2483.500	28.37	5.83	39.87	62.15	56.47	74.00	17.53	Peak
2485.050	28.37	5.83	39.87	61.75	56.08	74.00	17.92	Peak

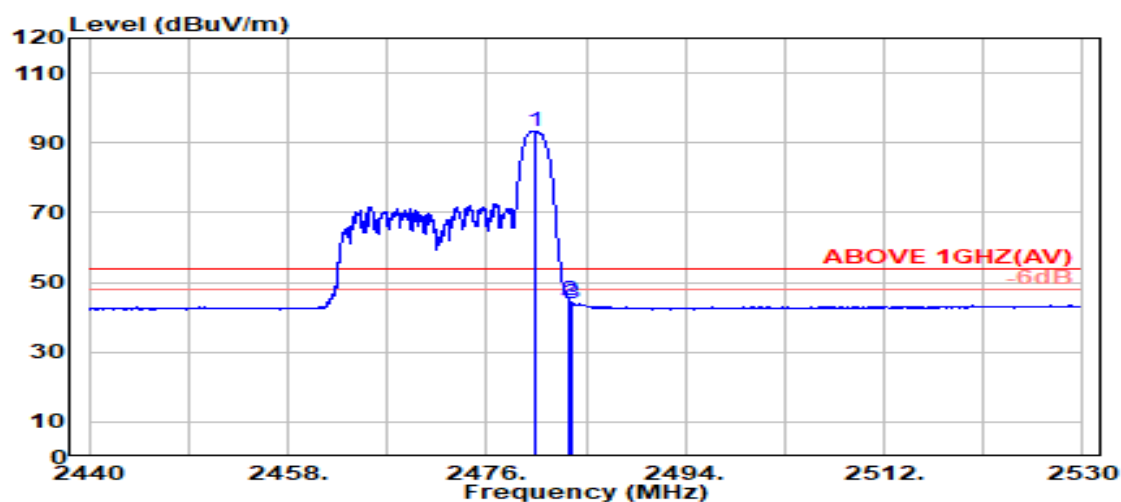

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.350	28.36	5.83	39.87	99.04	93.36	---	---	Average
2483.500	28.37	5.83	39.87	50.62	44.95	54.00	9.05	Average
2483.700	28.37	5.83	39.87	49.68	44.00	54.00	10.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

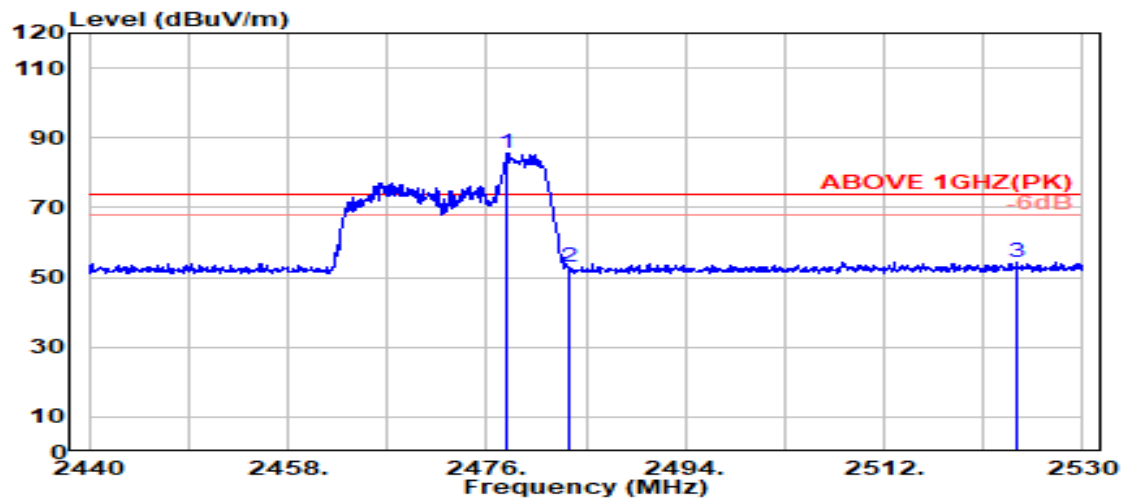

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2477.900	28.36	5.82	39.87	91.23	85.54	---	---	Peak
	2483.500	28.37	5.83	39.87	58.63	52.96	74.00	21.04	Peak
	2524.050	28.55	5.88	39.88	59.70	54.25	74.00	19.75	Peak

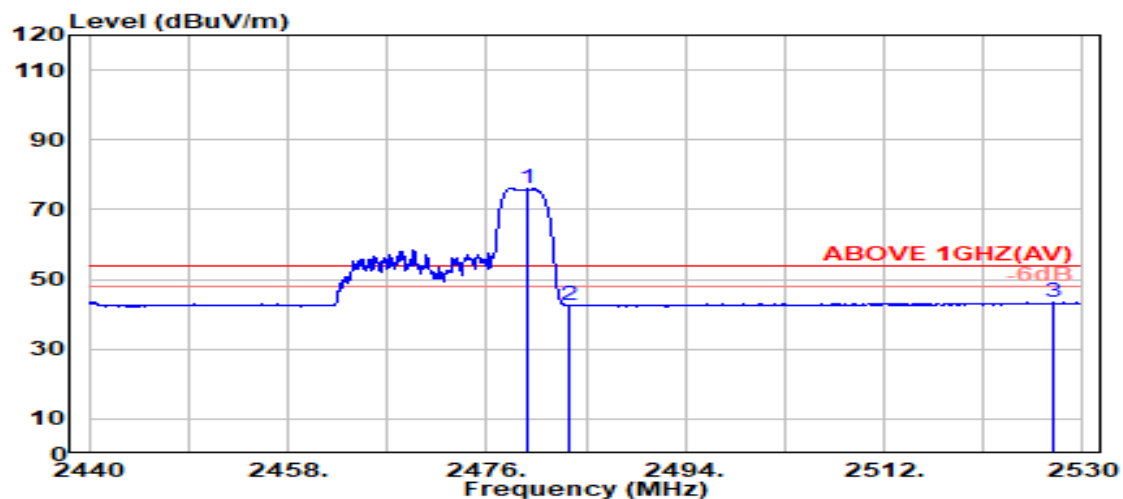

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2479.650	28.36	5.83	39.87	81.72	76.03	---	---	Average
	2483.500	28.37	5.83	39.87	48.39	42.71	54.00	11.29	Average
	2527.250	28.56	5.88	39.88	48.86	43.43	54.00	10.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

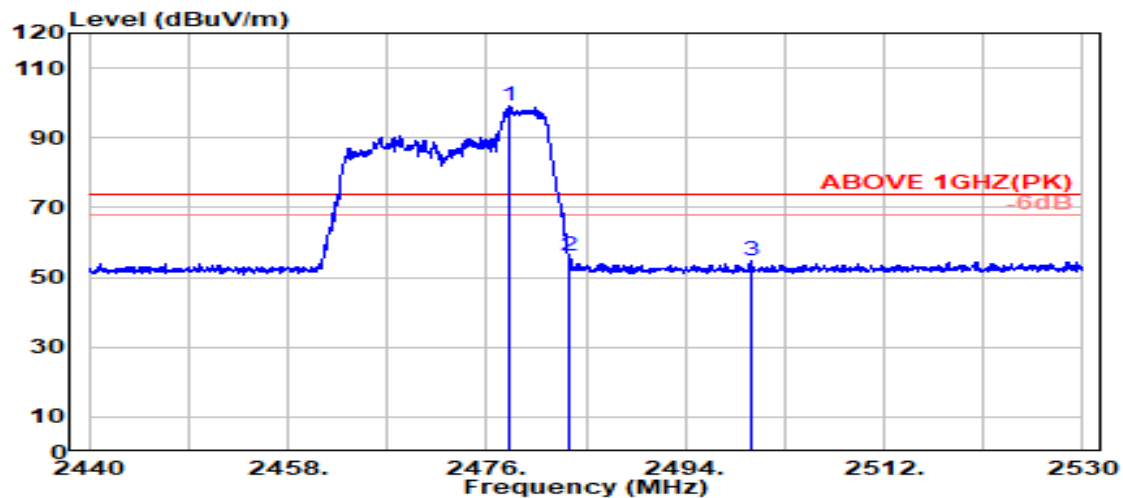

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2477.950	28.36	5.82	39.87	104.82	99.13	---	---	Peak
	2483.500	28.37	5.83	39.87	61.61	55.94	74.00	18.06	Peak
	2499.900	28.40	5.85	39.87	60.28	54.66	74.00	19.34	Peak

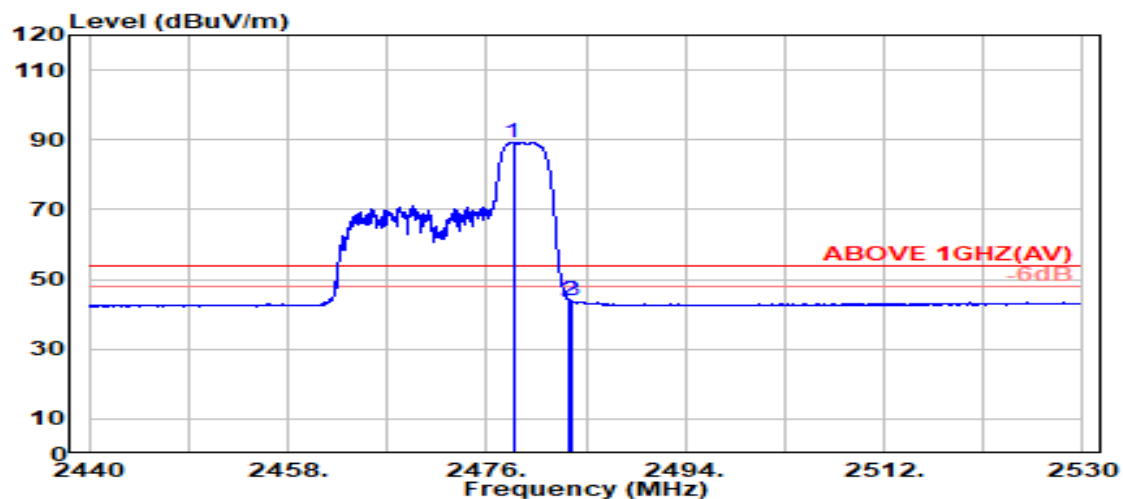

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2478.400	28.36	5.83	39.87	94.93	89.24	---	---	Average
	2483.500	28.37	5.83	39.87	49.68	44.01	54.00	9.99	Average
	2483.700	28.37	5.83	39.87	49.42	43.75	54.00	10.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

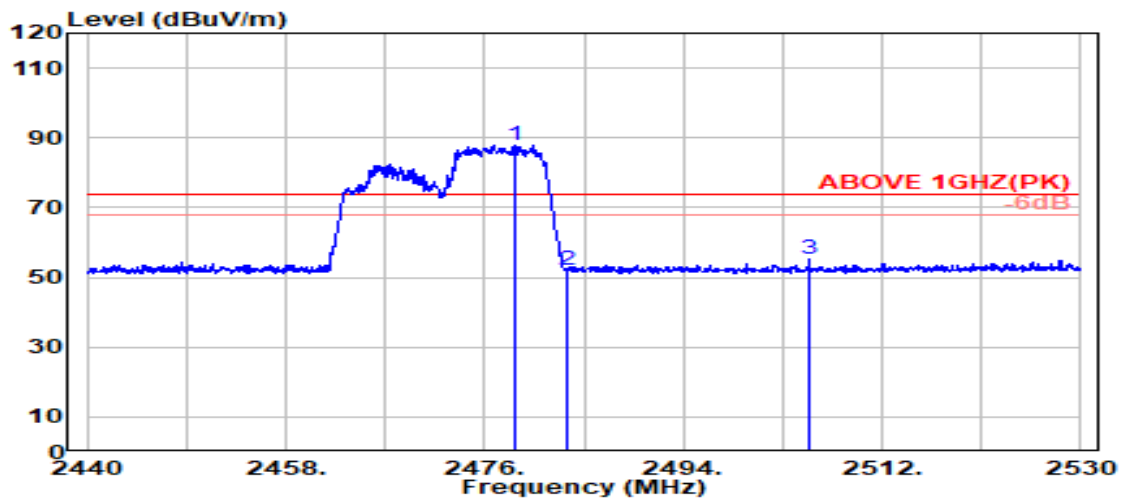

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	93.65	87.96	---	---	Peak
2483.500	28.37	5.83	39.87	57.74	52.07	74.00	21.93	Peak
2505.350	28.43	5.86	39.87	60.81	55.23	74.00	18.77	Peak

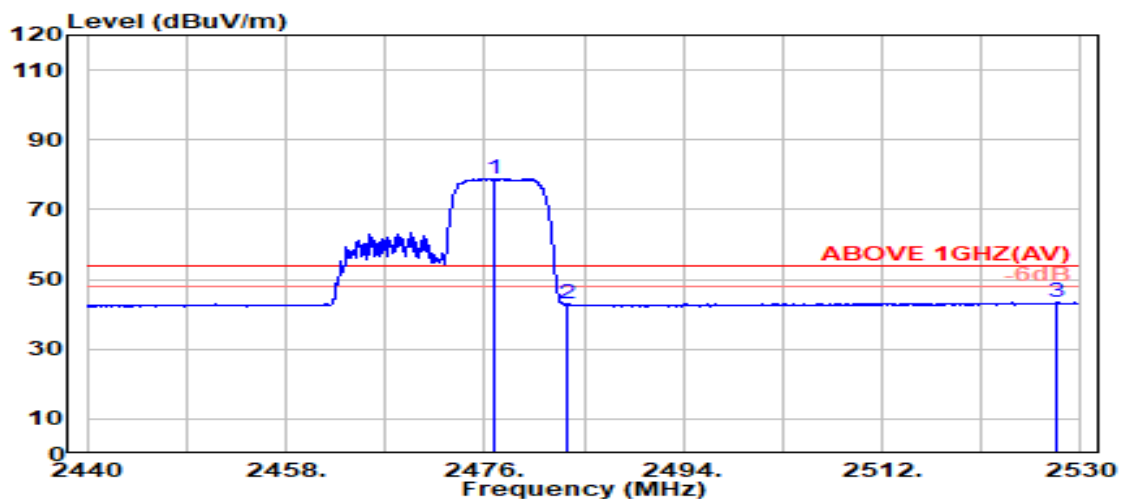

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.800	28.35	5.82	39.87	84.62	78.93	---	---	Average
2483.500	28.37	5.83	39.87	48.56	42.88	54.00	11.12	Average
2527.900	28.57	5.88	39.88	48.76	43.34	54.00	10.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

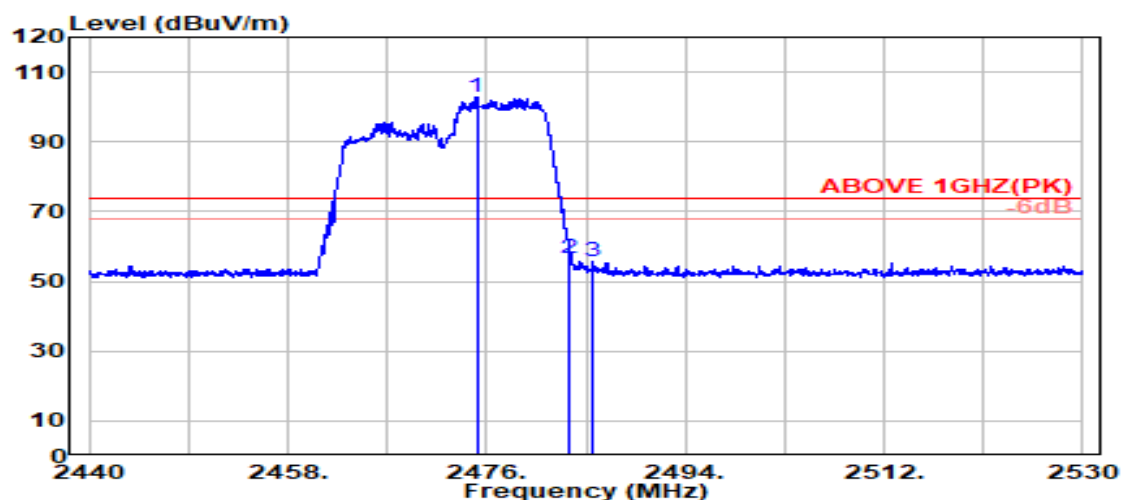

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.100	28.35	5.82	39.87	108.59	102.88	---	---	Peak
2483.500	28.37	5.83	39.87	62.41	56.74	74.00	17.26	Peak
2485.650	28.37	5.83	39.87	61.25	55.59	74.00	18.41	Peak

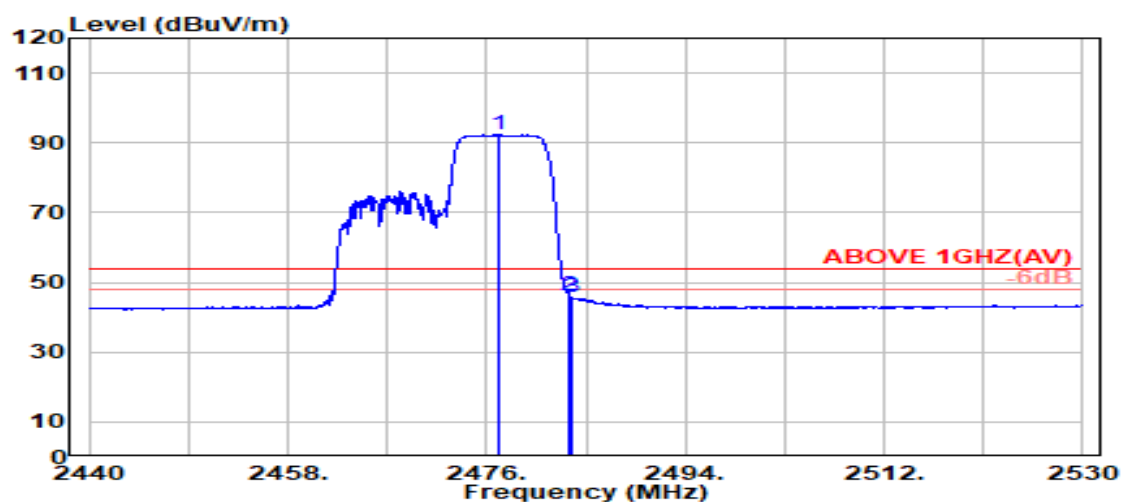

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.100	28.35	5.82	39.87	97.97	92.28	---	---	Average
2483.500	28.37	5.83	39.87	51.96	46.29	54.00	7.71	Average
2483.750	28.37	5.83	39.87	51.33	45.66	54.00	8.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

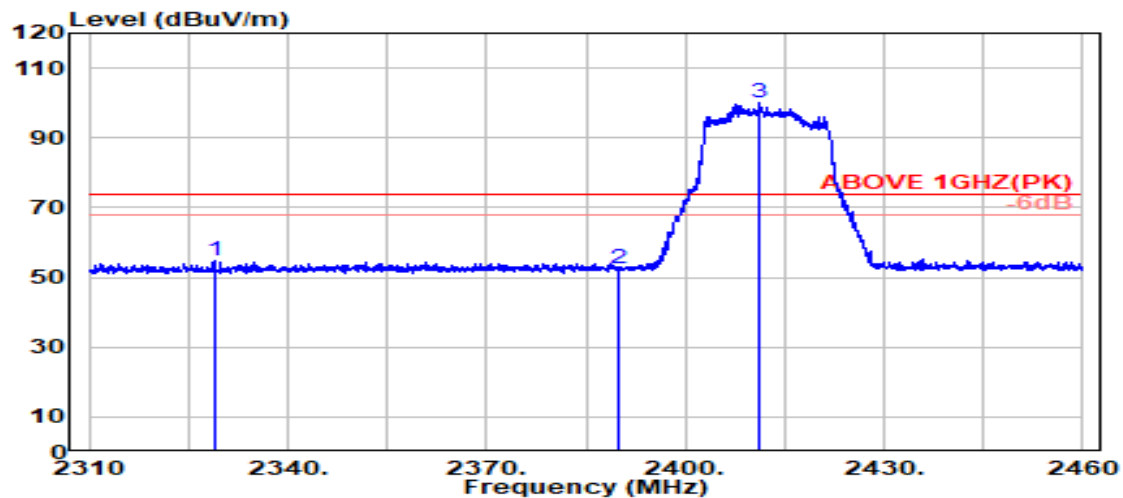

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2328.850	28.17	5.65	39.88	60.67	54.61	74.00	19.39	Peak
2389.800	28.14	5.72	39.88	58.66	52.65	74.00	21.35	Peak
@ 2411.150	28.14	5.75	39.88	106.04	100.06	---	---	Peak

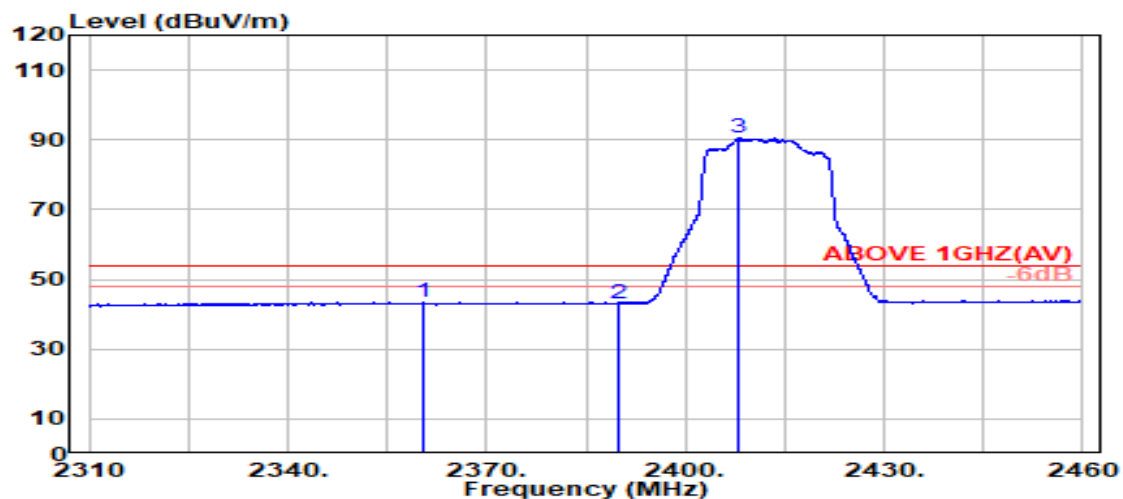

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2360.450	28.26	5.69	39.88	49.28	43.35	54.00	10.65	Average
2389.800	28.14	5.72	39.88	49.11	43.10	54.00	10.90	Average
@ 2407.950	28.13	5.74	39.88	96.47	90.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

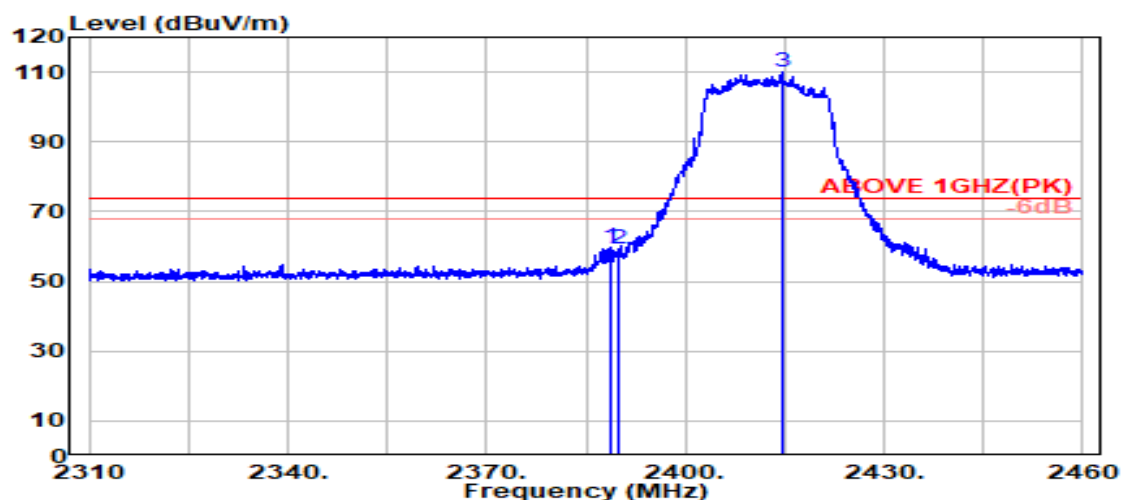

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.14	5.72	39.88	65.96	59.95	74.00	14.05	Peak
2389.800	28.14	5.72	39.88	65.20	59.18	74.00	14.82	Peak
@ 2414.600	28.16	5.75	39.88	115.85	109.88	---	---	Peak

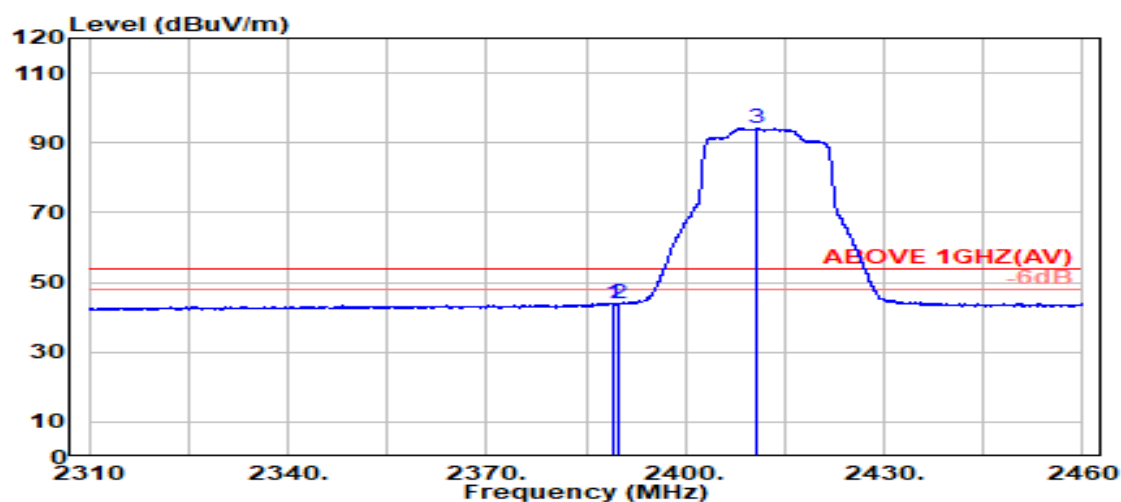

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	50.14	44.12	54.00	9.88	Average
2389.800	28.14	5.72	39.88	49.77	43.76	54.00	10.24	Average
@ 2410.800	28.14	5.75	39.88	100.30	94.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

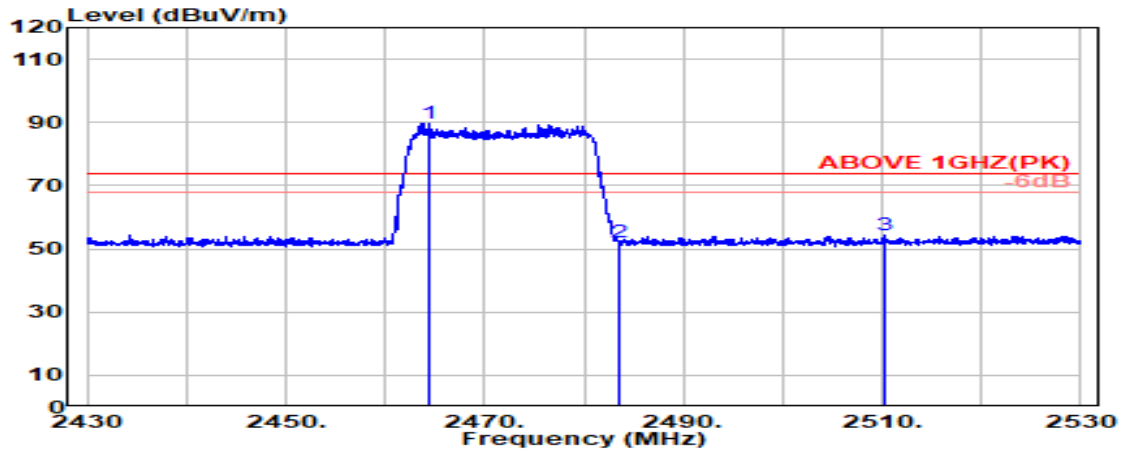

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.433	28.33	5.81	39.87	95.55	89.82	---	---	Peak
	2483.500	28.37	5.83	39.87	57.69	52.01	74.00	21.99	Peak
	2510.167	28.46	5.86	39.87	59.86	54.31	74.00	19.69	Peak

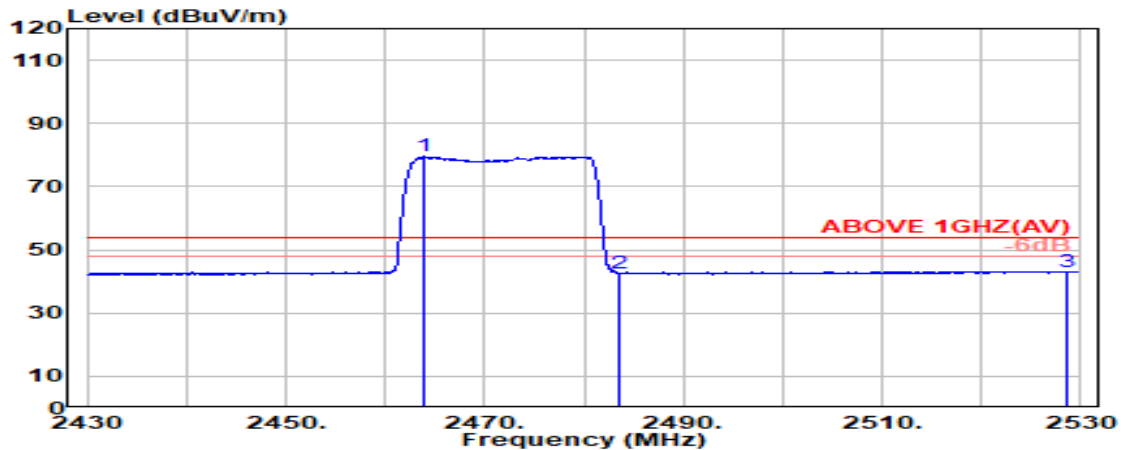

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.933	28.33	5.81	39.87	85.23	79.49	---	---	Average
	2483.500	28.37	5.83	39.87	48.38	42.71	54.00	11.29	Average
	2528.567	28.57	5.88	39.88	48.65	43.23	54.00	10.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

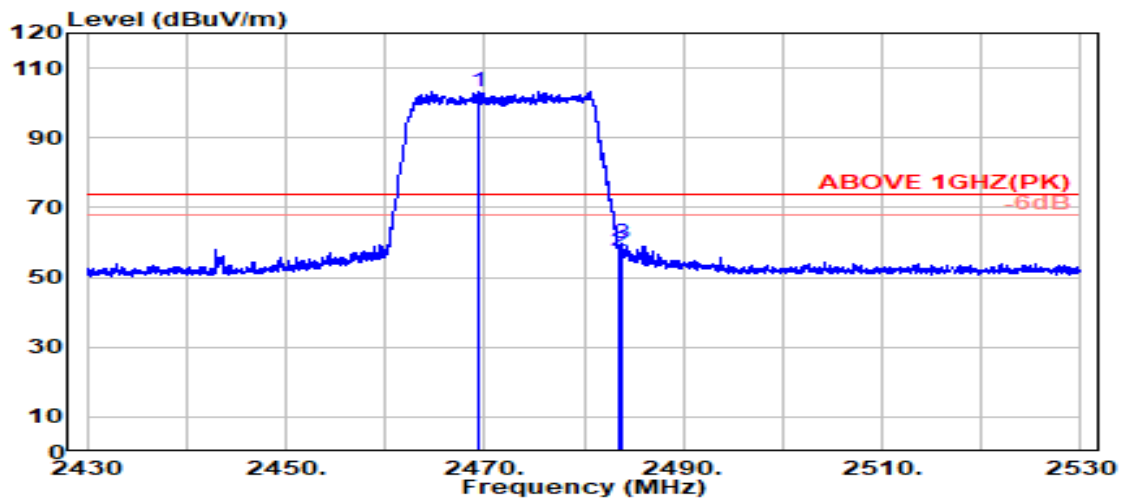

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.333	28.34	5.81	39.87	108.84	103.13	---	---	Peak
	2483.500	28.37	5.83	39.87	63.18	57.50	74.00	16.50	Peak
	2483.833	28.37	5.83	39.87	65.32	59.65	74.00	14.35	Peak

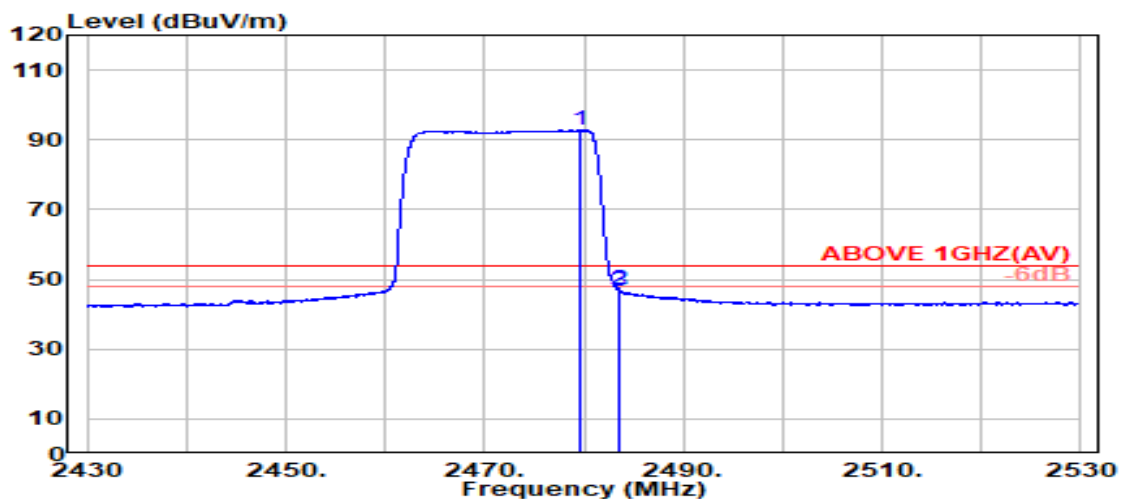

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.533	28.36	5.83	39.87	98.42	92.74	---	---	Average
	2483.500	28.37	5.83	39.87	52.65	46.97	54.00	7.03	Average
	2483.667	28.37	5.83	39.87	52.46	46.79	54.00	7.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

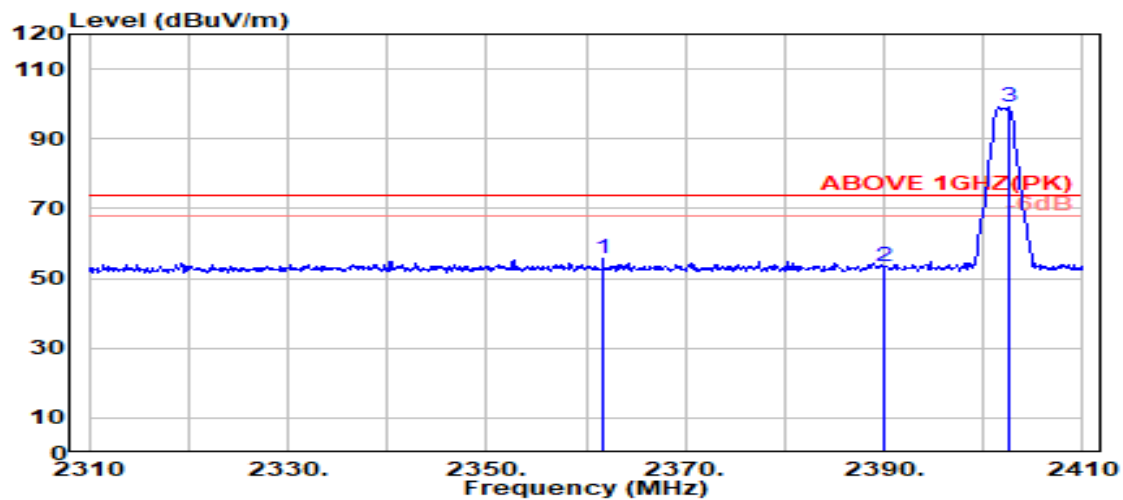

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2361.700	28.25	5.69	39.88	61.42	55.48	74.00	18.52	Peak
2390.000	28.14	5.72	39.88	59.51	53.49	74.00	20.51	Peak
@ 2402.500	28.11	5.74	39.88	105.06	99.03	---	---	Peak

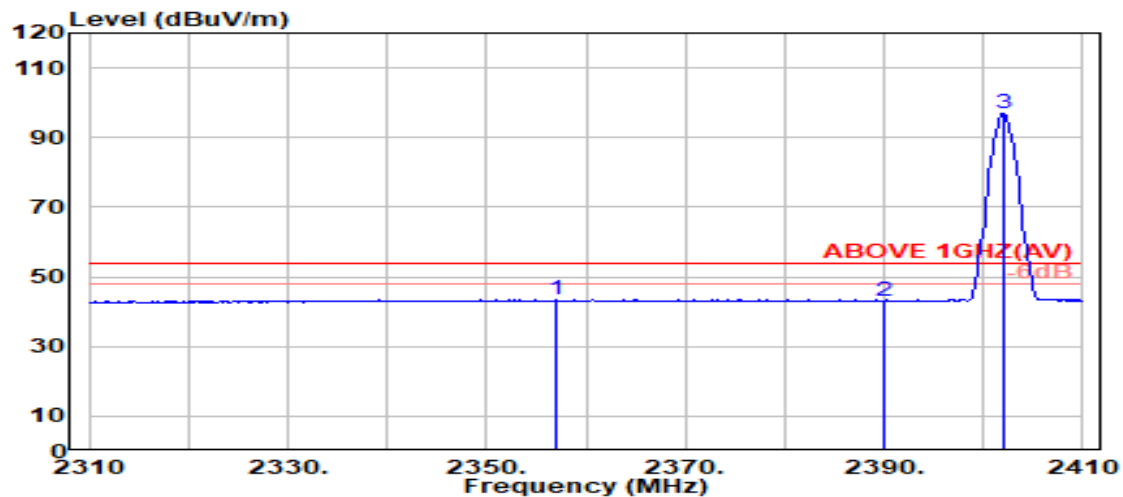

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2357.100	28.27	5.68	39.88	49.41	43.48	54.00	10.52	Average
2390.000	28.14	5.72	39.88	49.14	43.12	54.00	10.88	Average
@ 2402.000	28.11	5.74	39.88	102.82	96.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

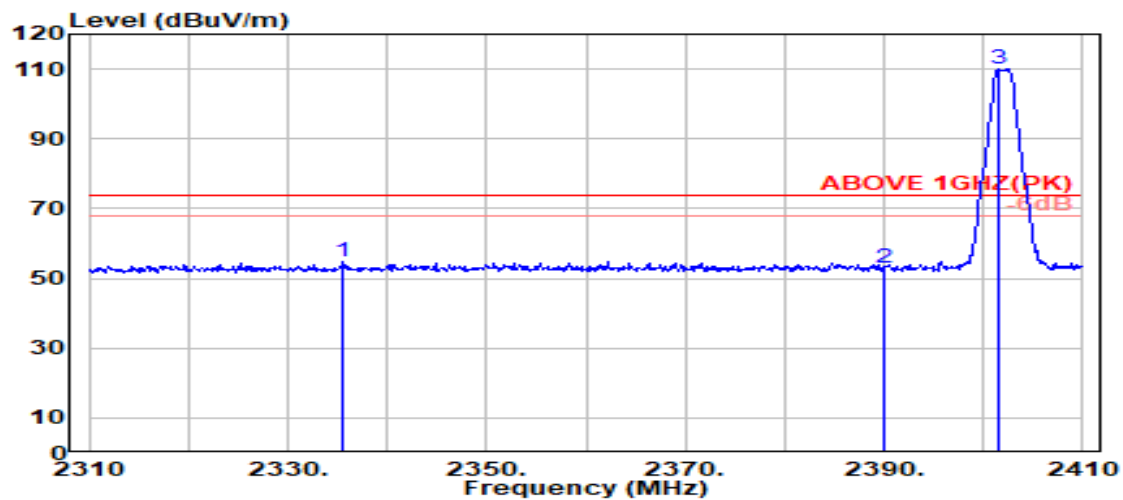

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2335.500	28.21	5.65	39.88	60.89	54.88	74.00	19.12	Peak
2390.000	28.14	5.72	39.88	59.06	53.04	74.00	20.96	Peak
@ 2401.500	28.11	5.73	39.88	116.11	110.07	---	---	Peak

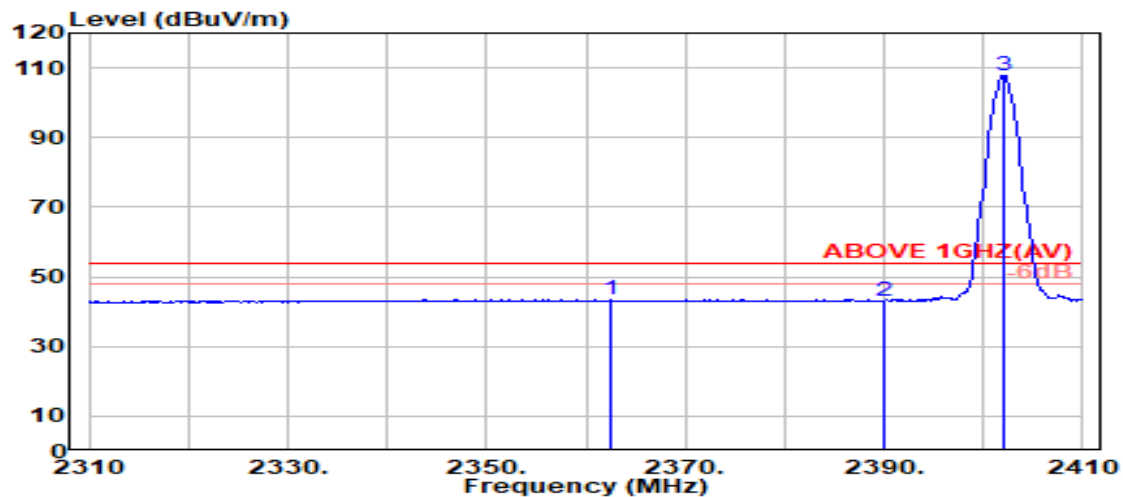

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2362.400	28.25	5.69	39.88	49.34	43.40	54.00	10.60	Average
2390.000	28.14	5.72	39.88	49.13	43.11	54.00	10.89	Average
@ 2402.000	28.11	5.74	39.88	113.93	107.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

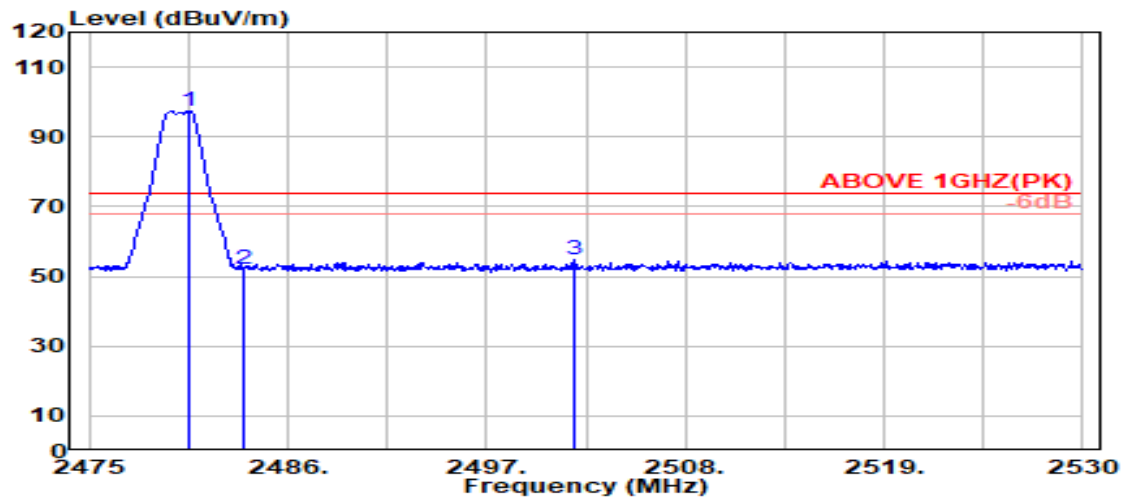

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.83	39.87	103.11	97.42	---	---	Peak
2483.500	28.37	5.83	39.87	57.91	52.24	74.00	21.76	Peak
2501.800	28.41	5.85	39.87	60.31	54.71	74.00	19.29	Peak

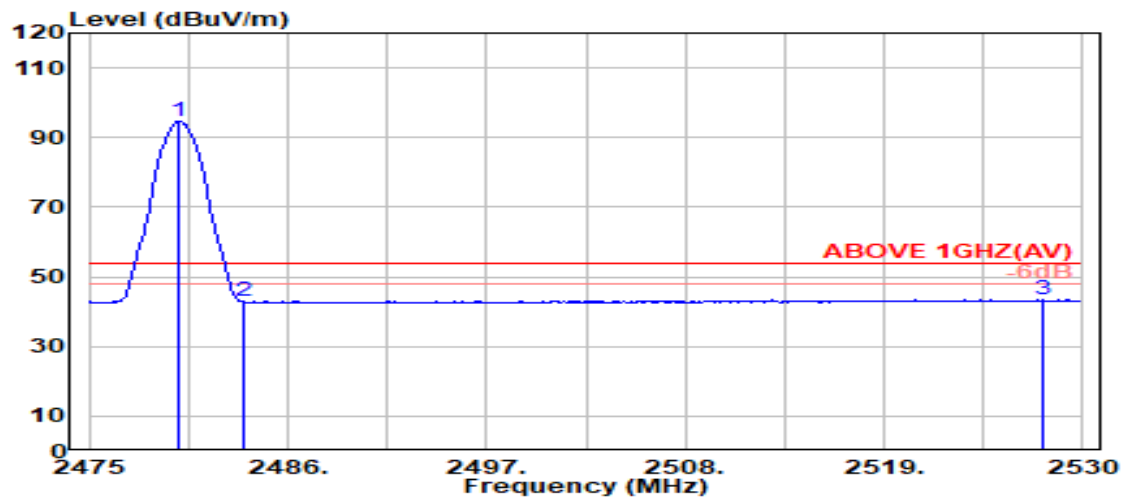

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	100.40	94.71	---	---	Average
2483.500	28.37	5.83	39.87	48.69	43.01	54.00	10.99	Average
2527.800	28.57	5.88	39.88	48.86	43.44	54.00	10.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

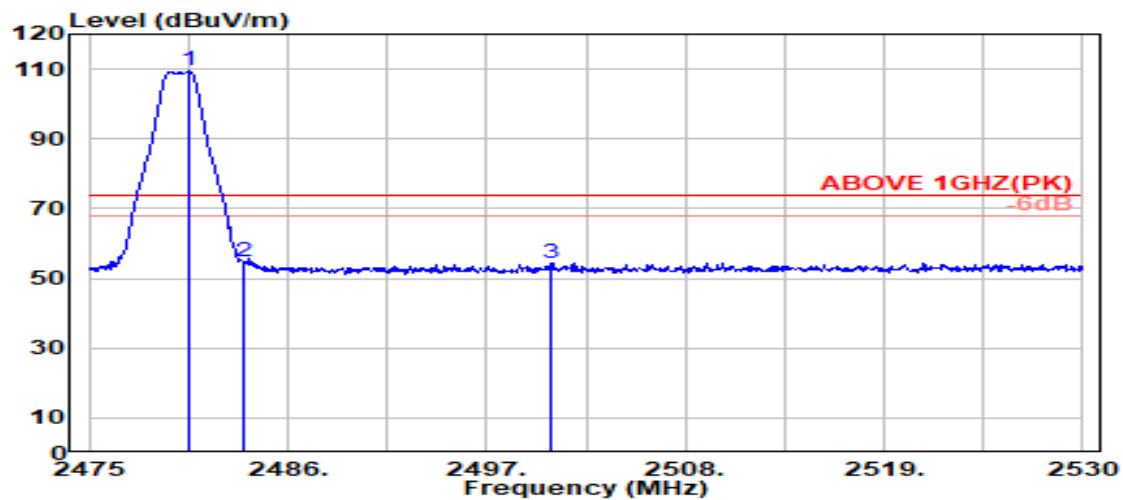

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.83	39.87	115.05	109.37	---	---	Peak
2483.500	28.37	5.83	39.87	60.54	54.87	74.00	19.13	Peak
2500.600	28.40	5.85	39.87	60.14	54.52	74.00	19.48	Peak

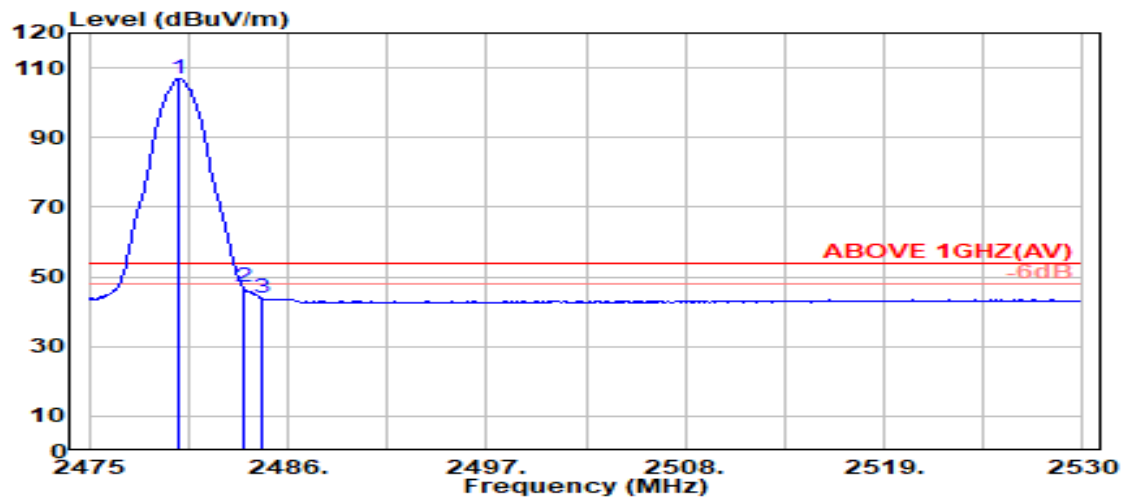


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	112.70	107.02	---	---	Average
2483.500	28.37	5.83	39.87	52.84	47.16	54.00	6.84	Average
2484.500	28.37	5.83	39.87	49.75	44.08	54.00	9.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section


● **With LUXSHARE-ICT Antenna**

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

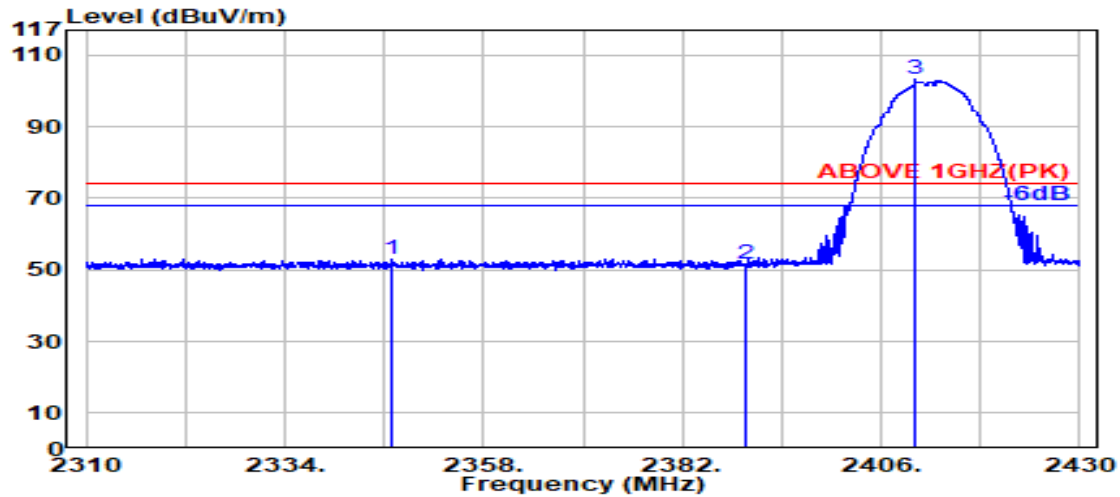

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2347.000	28.48	5.97	34.49	53.21	53.17	74.00	20.83	Peak
2389.800	28.18	6.03	34.50	51.74	51.46	74.00	22.54	Peak
@ 2410.050	28.16	6.06	34.50	103.64	103.36	---	---	Peak

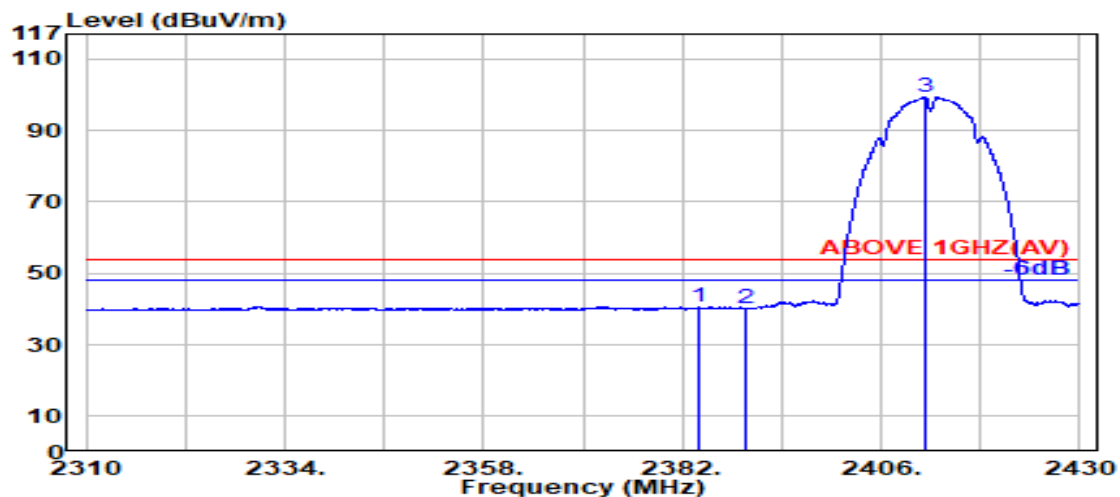

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.000	28.23	6.03	34.50	40.88	40.64	54.00	13.36	Average
2389.800	28.18	6.03	34.50	40.40	40.12	54.00	13.88	Average
@ 2411.200	28.17	6.07	34.50	99.76	99.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

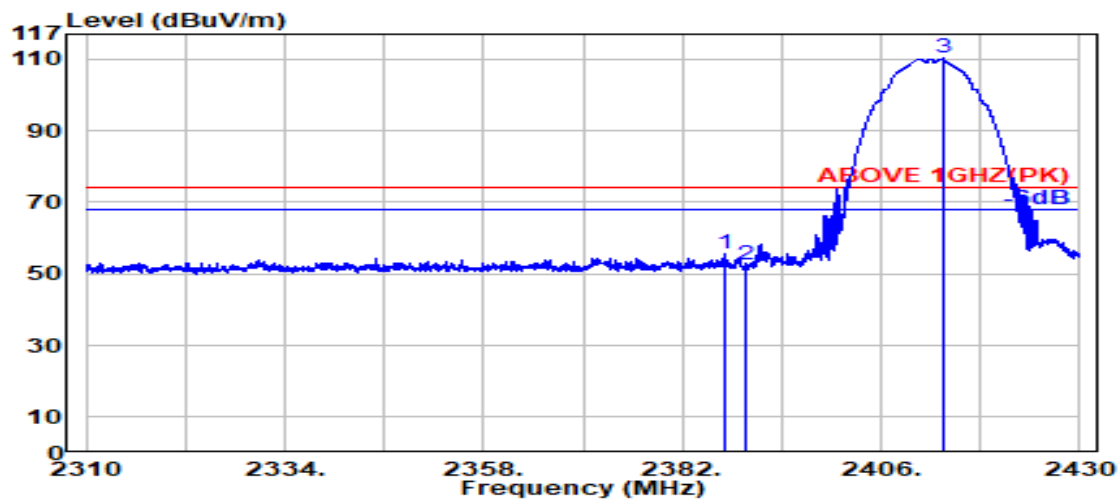

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.20	6.03	34.50	56.09	55.83	74.00	18.17	Peak
2389.800	28.18	6.03	34.50	52.63	52.35	74.00	21.65	Peak
@ 2413.450	28.18	6.07	34.50	110.67	110.42	---	---	Peak

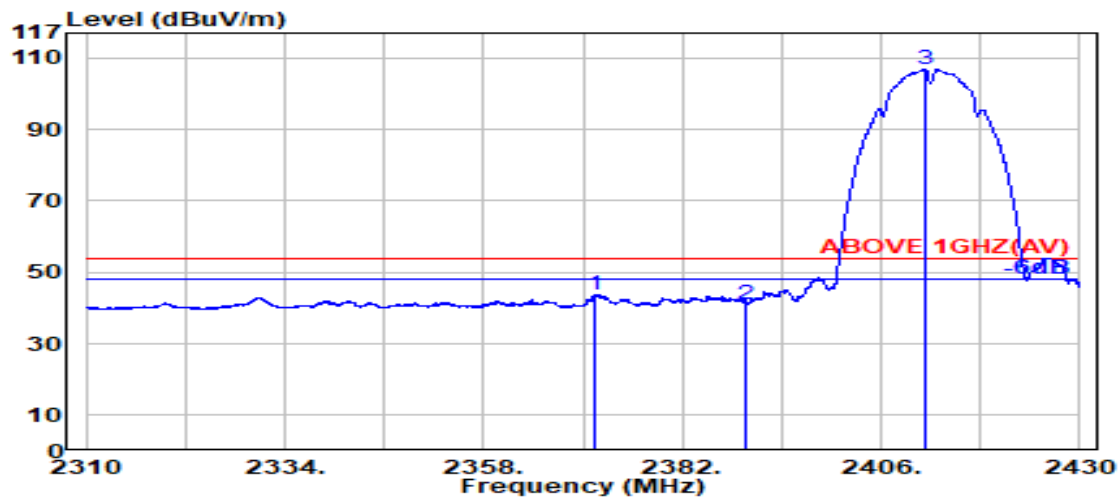

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.450	28.33	6.01	34.49	43.92	43.76	54.00	10.24	Average
2389.800	28.18	6.03	34.50	41.48	41.20	54.00	12.80	Average
@ 2411.250	28.17	6.07	34.50	107.32	107.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

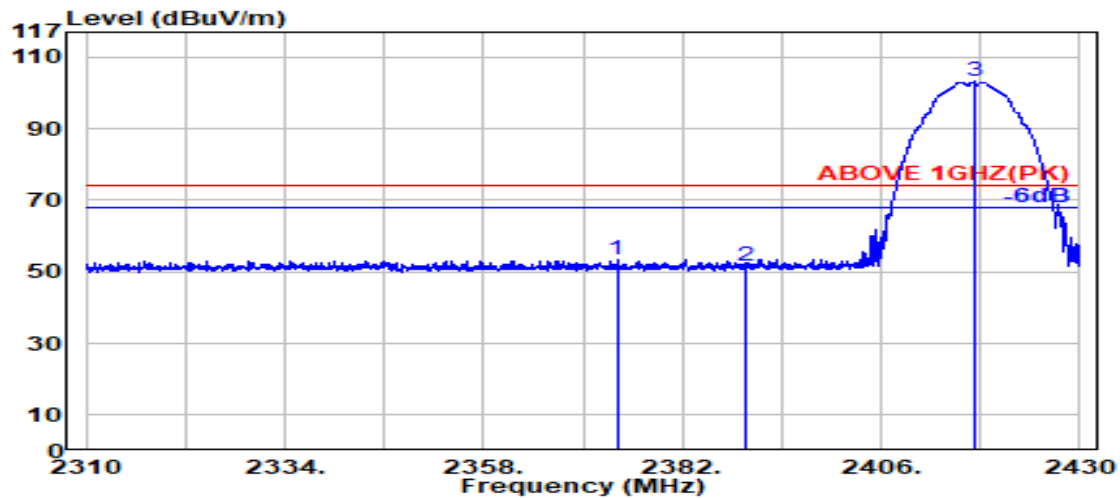

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.100	28.31	6.01	34.49	53.78	53.60	74.00	20.40	Peak
2389.800	28.18	6.03	34.50	51.79	51.51	74.00	22.49	Peak
@ 2417.250	28.20	6.07	34.50	103.47	103.24	---	---	Peak

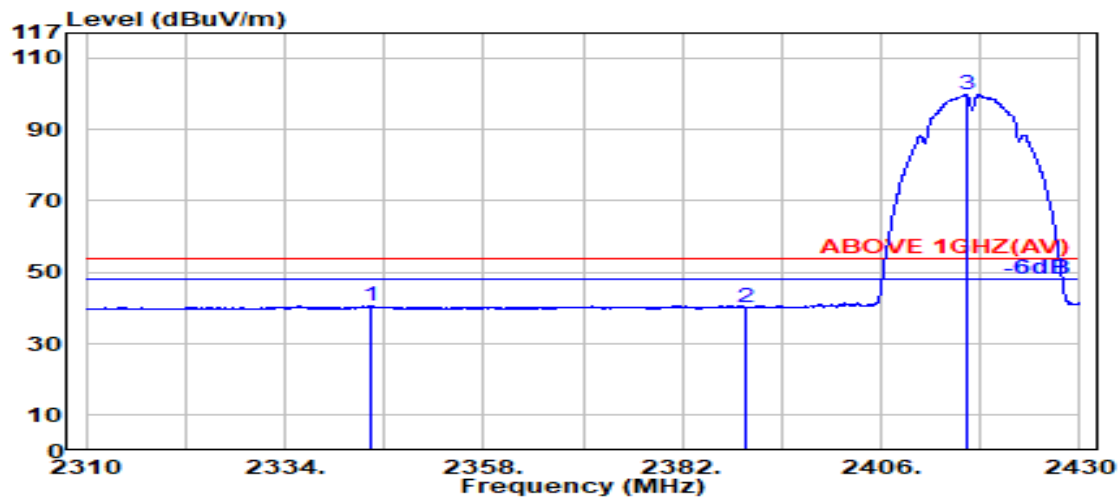

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.500	28.46	5.97	34.49	40.69	40.63	54.00	13.37	Average
2389.800	28.18	6.03	34.50	40.26	39.98	54.00	14.02	Average
@ 2416.250	28.20	6.07	34.50	100.13	99.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

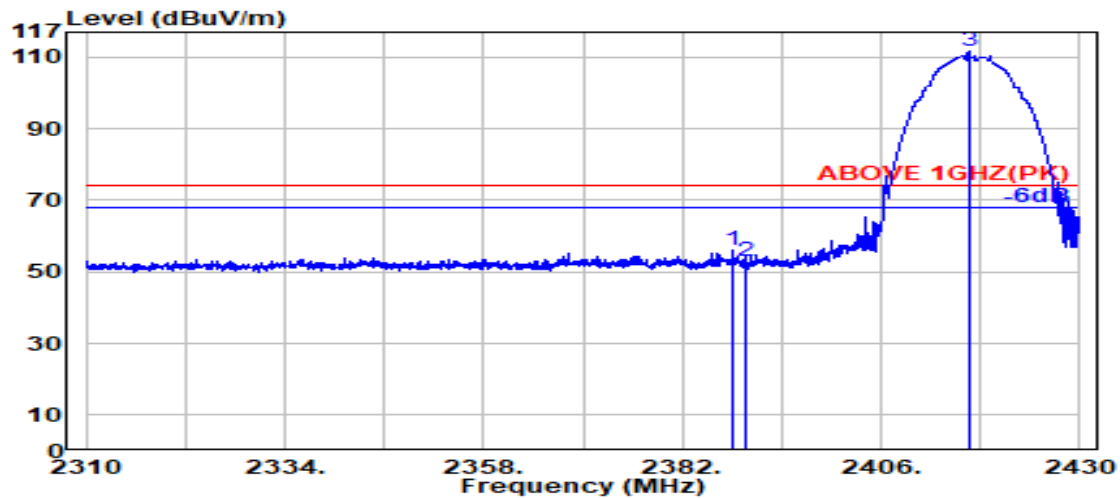

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.050	28.19	6.03	34.50	56.18	55.91	74.00	18.09	Peak
2389.800	28.18	6.03	34.50	53.14	52.86	74.00	21.14	Peak
@ 2416.650	28.20	6.07	34.50	111.97	111.74	---	---	Peak

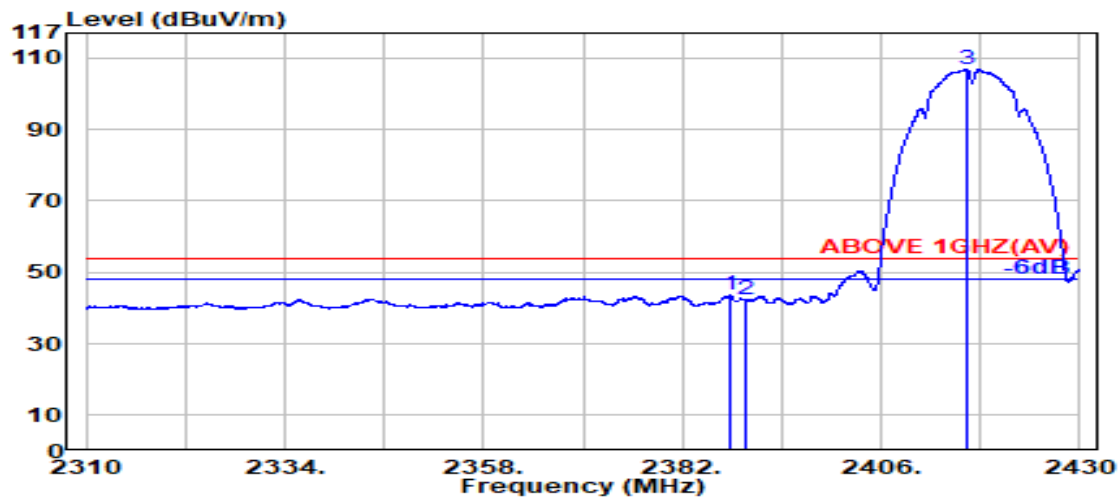

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.900	28.20	6.03	34.50	43.82	43.55	54.00	10.45	Average
2389.800	28.18	6.03	34.50	42.56	42.27	54.00	11.73	Average
@ 2416.250	28.20	6.07	34.50	107.28	107.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

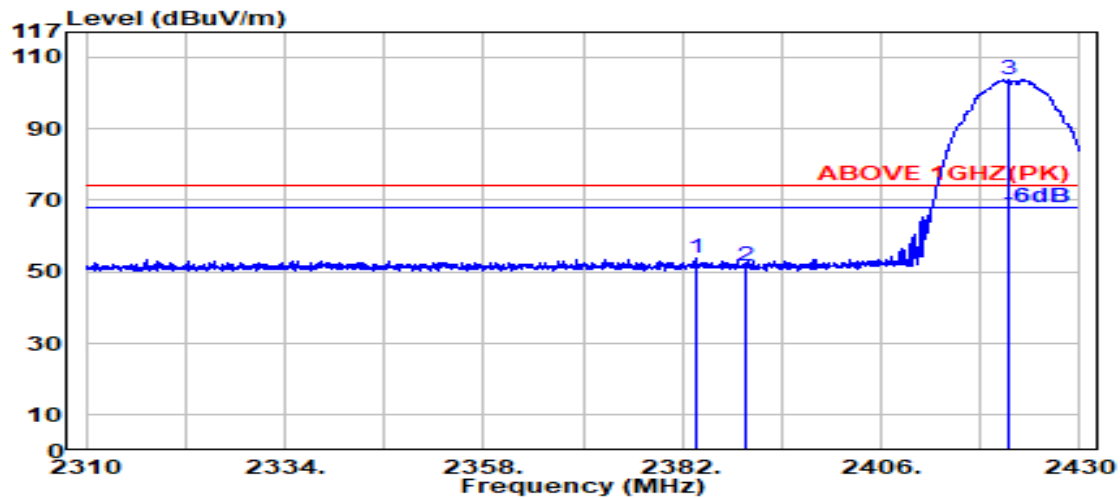

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.550	28.23	6.03	34.50	54.17	53.93	74.00	20.07	Peak
2389.800	28.18	6.03	34.50	51.76	51.47	74.00	22.53	Peak
@ 2421.500	28.23	6.08	34.50	103.79	103.59	---	---	Peak

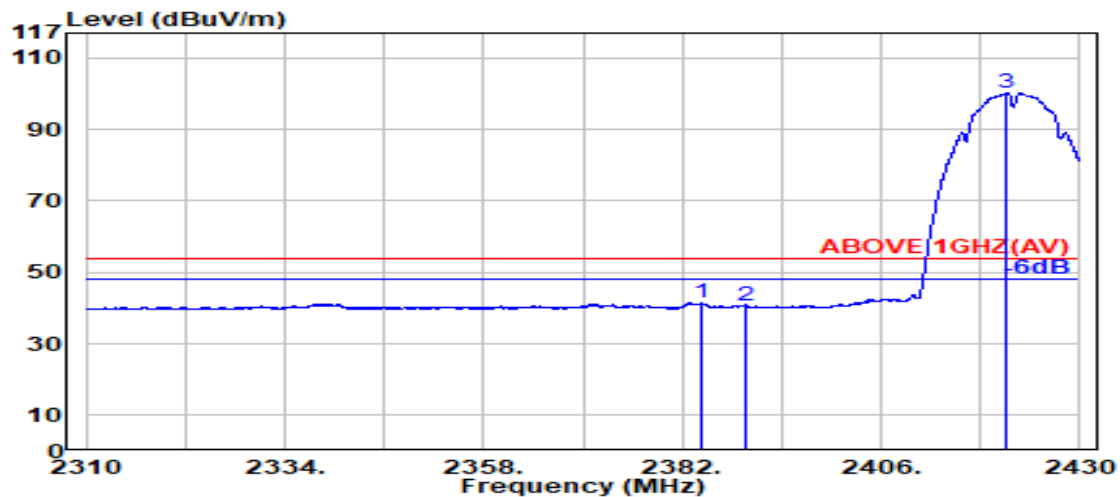

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.350	28.22	6.03	34.50	41.81	41.56	54.00	12.44	Average
2389.800	28.18	6.03	34.50	40.95	40.67	54.00	13.33	Average
@ 2421.200	28.23	6.08	34.50	100.58	100.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

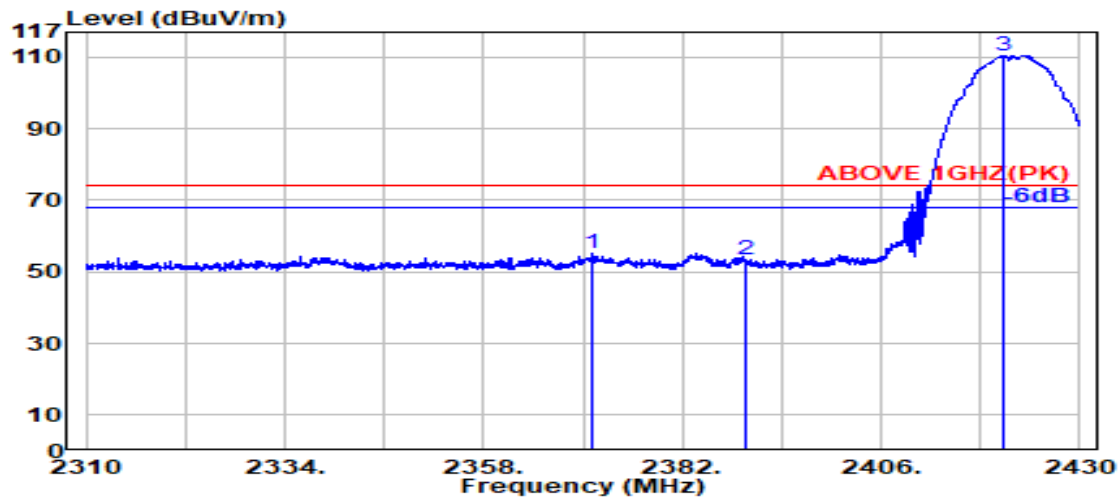

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.200	28.33	6.01	34.49	55.22	55.06	74.00	18.94	Peak
2389.800	28.18	6.03	34.50	53.88	53.60	74.00	20.40	Peak
@ 2420.850	28.23	6.08	34.50	110.66	110.46	---	---	Peak

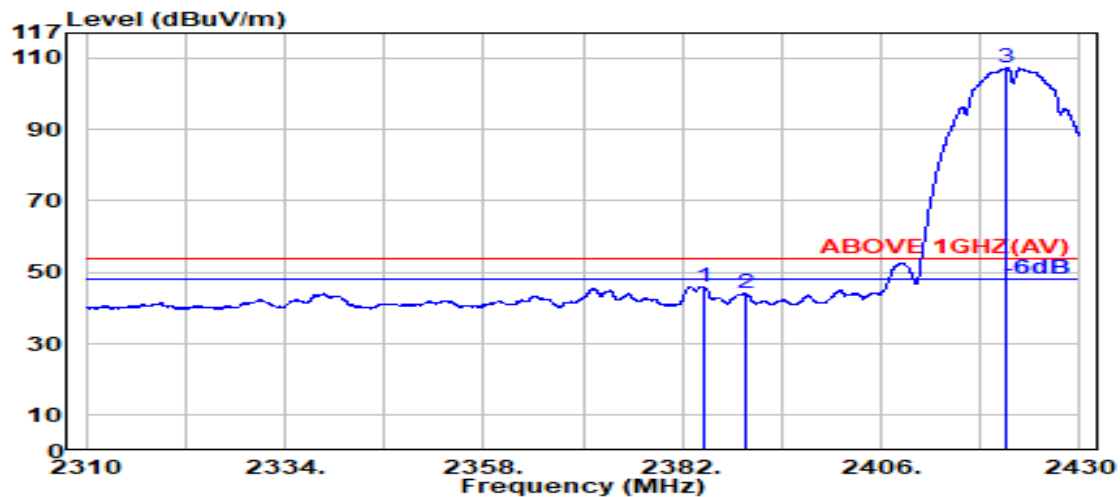

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.550	28.22	6.03	34.50	46.30	46.05	54.00	7.95	Average
2389.800	28.18	6.03	34.50	44.27	43.99	54.00	10.01	Average
@ 2421.200	28.23	6.08	34.50	107.51	107.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

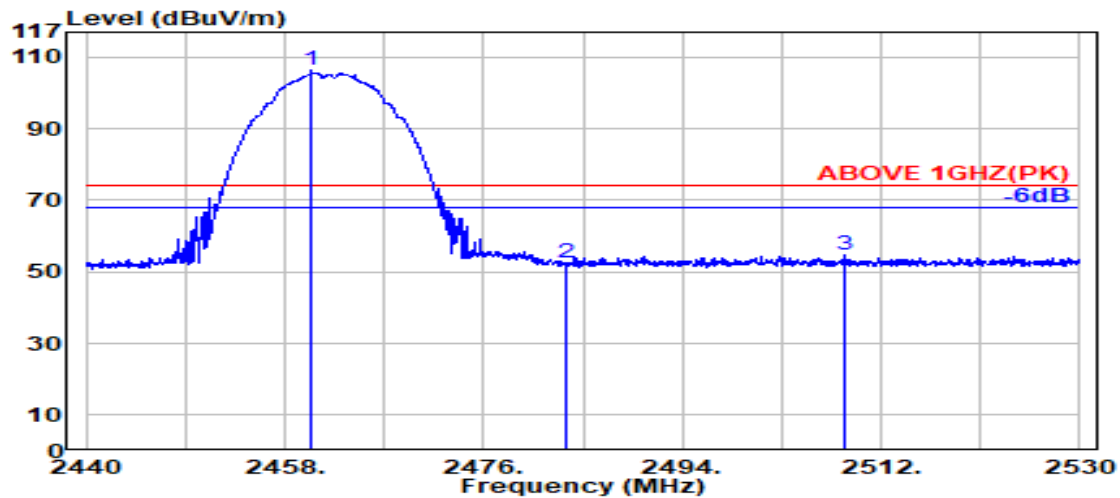

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.400	28.42	6.13	34.51	106.50	106.55	---	---	Peak
	2483.500	28.47	6.17	34.52	52.45	52.57	74.00	21.43	Peak
	2508.600	28.55	6.20	34.52	54.52	54.75	74.00	19.25	Peak

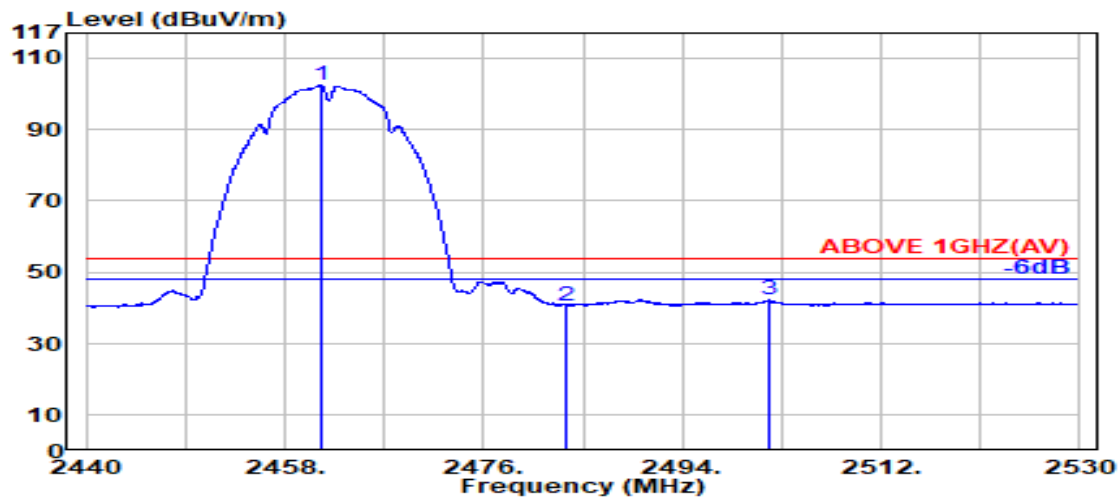

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.250	28.42	6.14	34.51	102.36	102.41	---	---	Average
	2483.500	28.47	6.17	34.52	40.69	40.80	54.00	13.20	Average
	2501.800	28.51	6.19	34.52	42.16	42.34	54.00	11.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

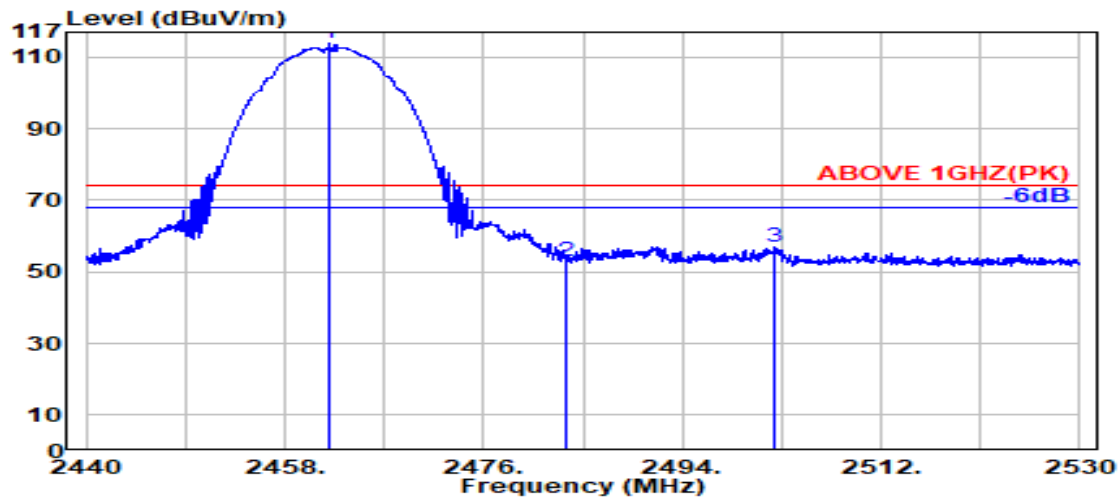

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.000	28.42	6.14	34.51	113.66	113.71	---	---	Peak
2483.500	28.47	6.17	34.52	52.81	52.93	74.00	21.07	Peak
2502.300	28.51	6.19	34.52	56.91	57.09	74.00	16.91	Peak

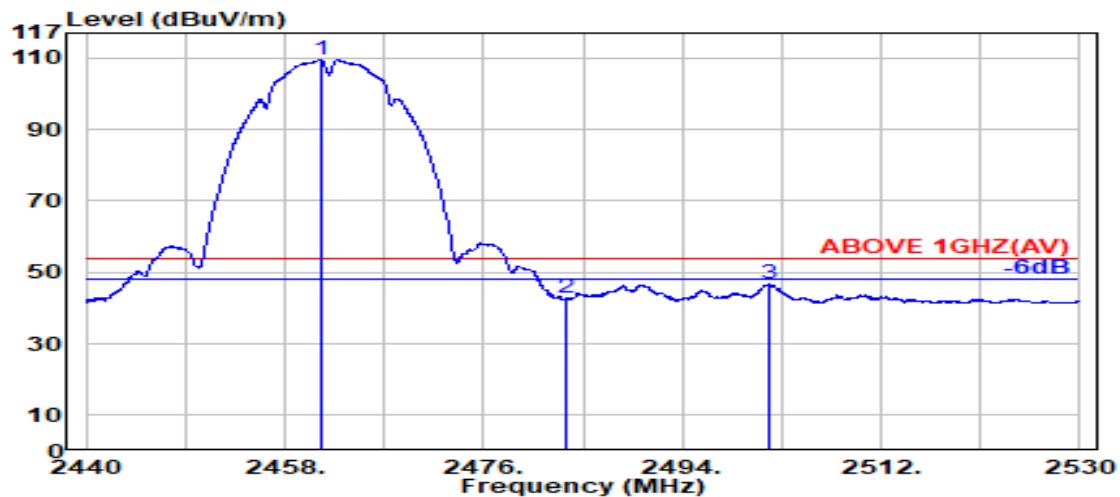

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.200	28.42	6.14	34.51	109.59	109.63	---	---	Average
2483.500	28.47	6.17	34.52	42.49	42.61	54.00	11.39	Average
2501.950	28.51	6.19	34.52	46.52	46.71	54.00	7.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

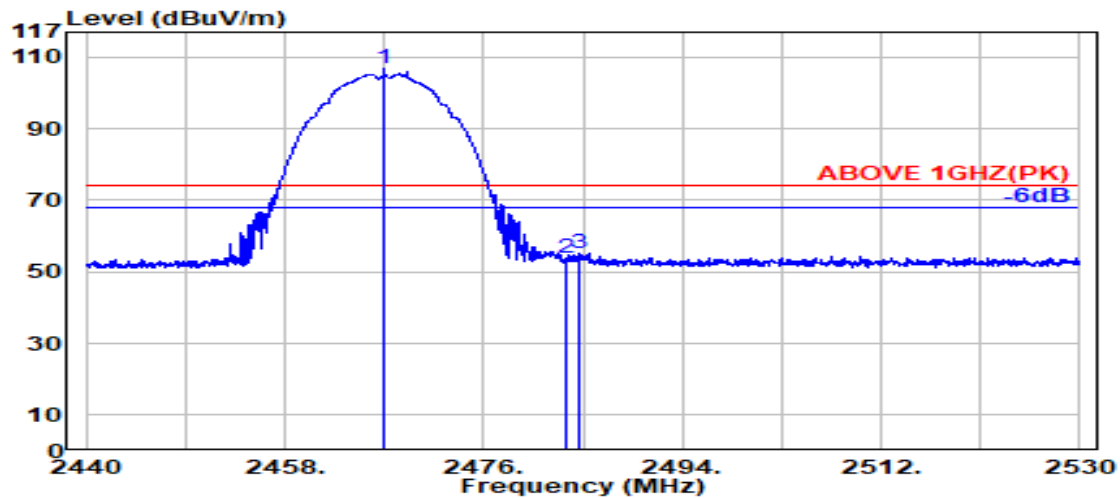

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.43	6.14	34.51	106.60	106.67	---	---	Peak
2483.500	28.47	6.17	34.52	53.78	53.90	74.00	20.10	Peak
2484.600	28.47	6.17	34.52	55.03	55.15	74.00	18.85	Peak

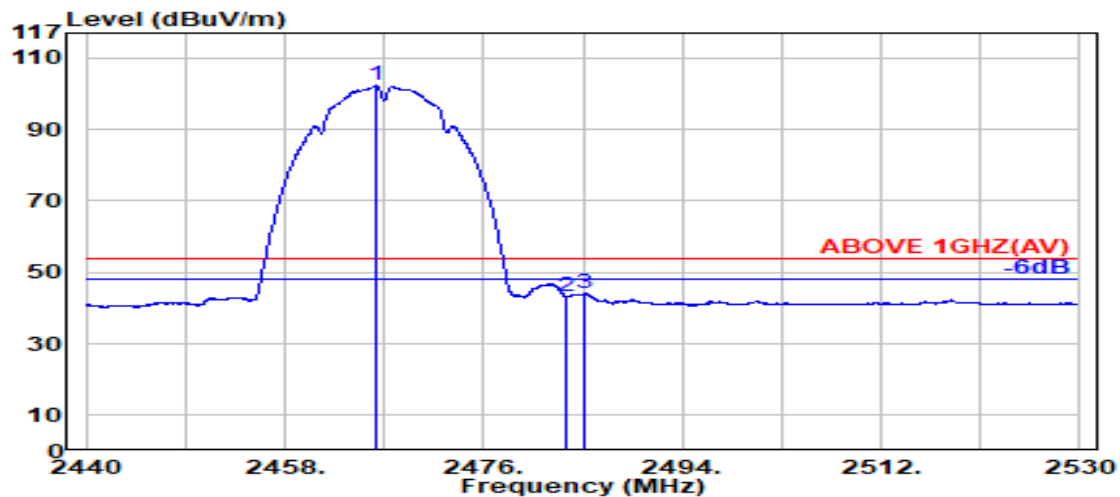

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	102.15	102.21	---	---	Average
2483.500	28.47	6.17	34.52	43.00	43.12	54.00	10.88	Average
2485.100	28.47	6.17	34.52	44.02	44.14	54.00	9.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

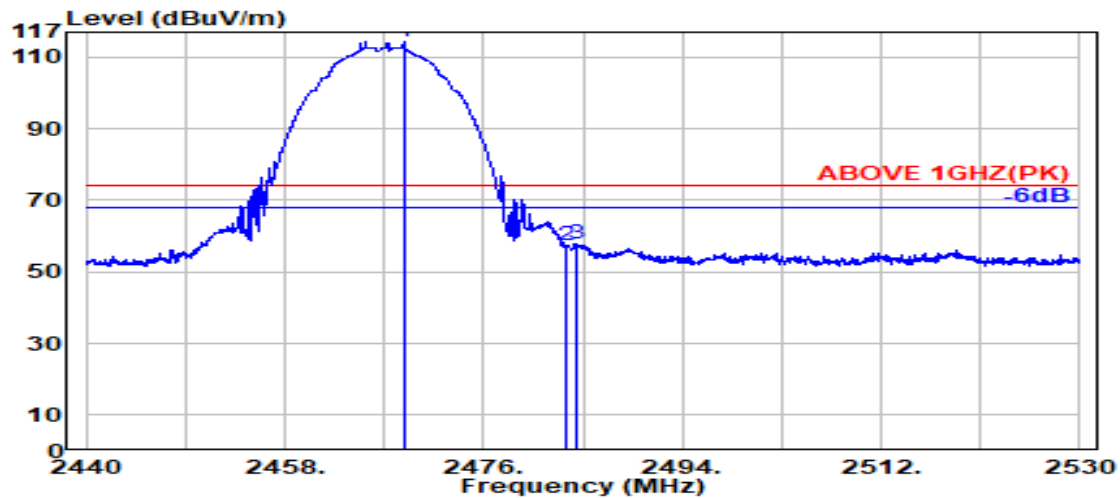

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.750	28.44	6.15	34.51	114.11	114.18	---	---	Peak
2483.500	28.47	6.17	34.52	57.08	57.20	74.00	16.80	Peak
2484.400	28.47	6.17	34.52	57.85	57.97	74.00	16.03	Peak

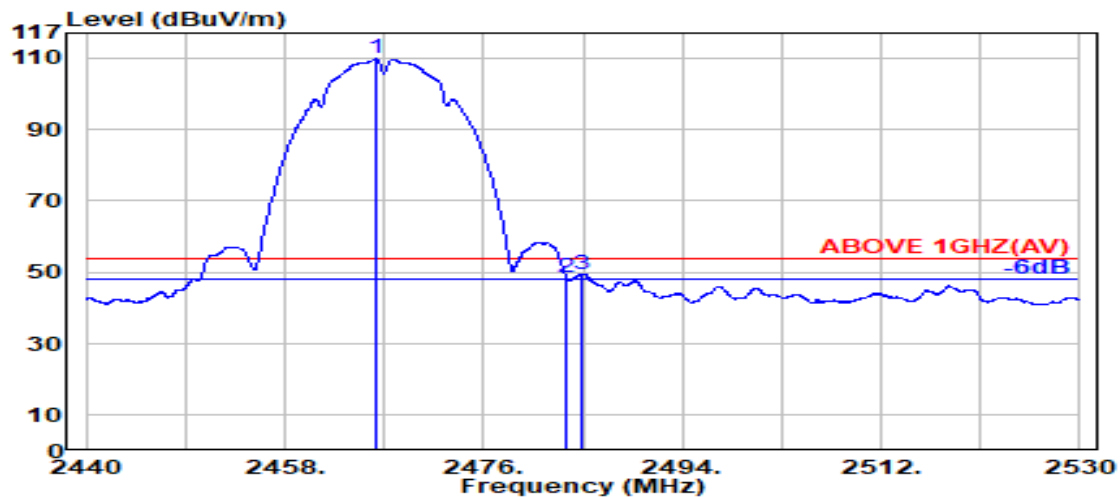

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	109.66	109.73	---	---	Average
2483.500	28.47	6.17	34.52	48.25	48.37	54.00	5.63	Average
2484.950	28.47	6.17	34.52	49.54	49.66	54.00	4.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

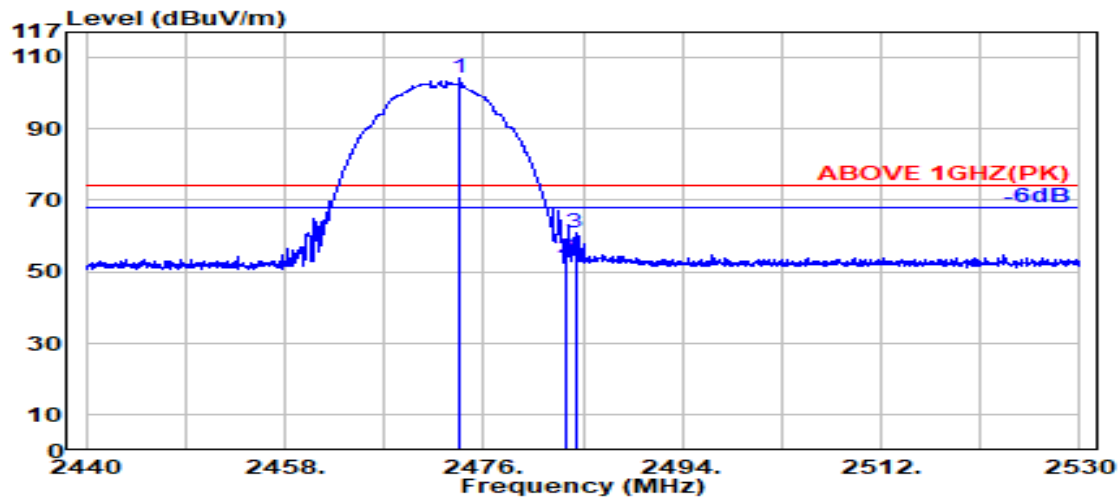

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.800	28.45	6.15	34.51	103.99	104.08	---	---	Peak
2483.500	28.47	6.17	34.52	53.72	53.84	74.00	20.16	Peak
2484.300	28.47	6.17	34.52	60.91	61.03	74.00	12.97	Peak

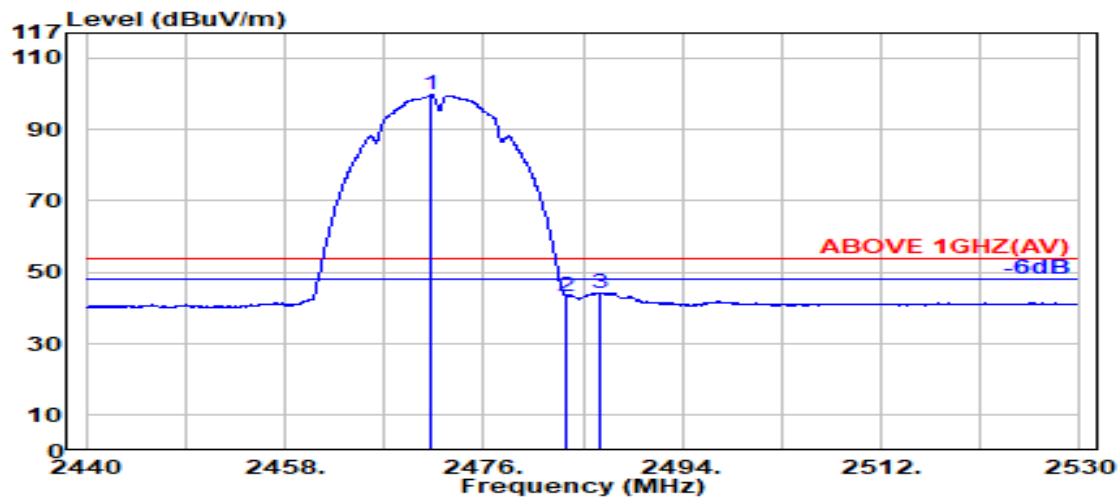

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.250	28.44	6.15	34.51	99.72	99.79	---	---	Average
2483.500	28.47	6.17	34.52	43.22	43.34	54.00	10.66	Average
2486.500	28.47	6.17	34.52	44.13	44.26	54.00	9.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

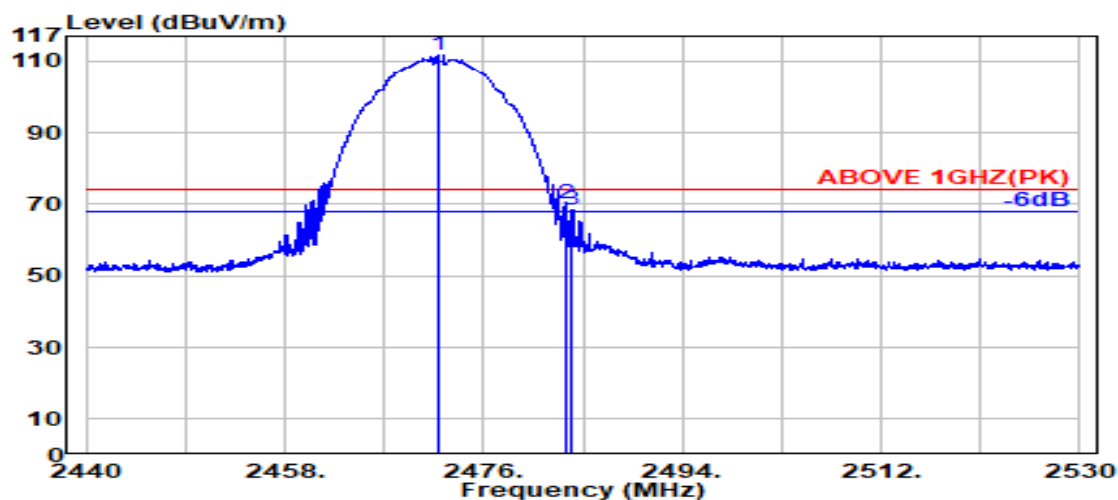

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.900	28.44	6.15	34.51	111.76	111.84	---	---	Peak
2483.500	28.47	6.17	34.52	70.27	70.38	74.00	3.62	Peak
2484.050	28.47	6.17	34.52	68.18	68.30	74.00	5.70	Peak

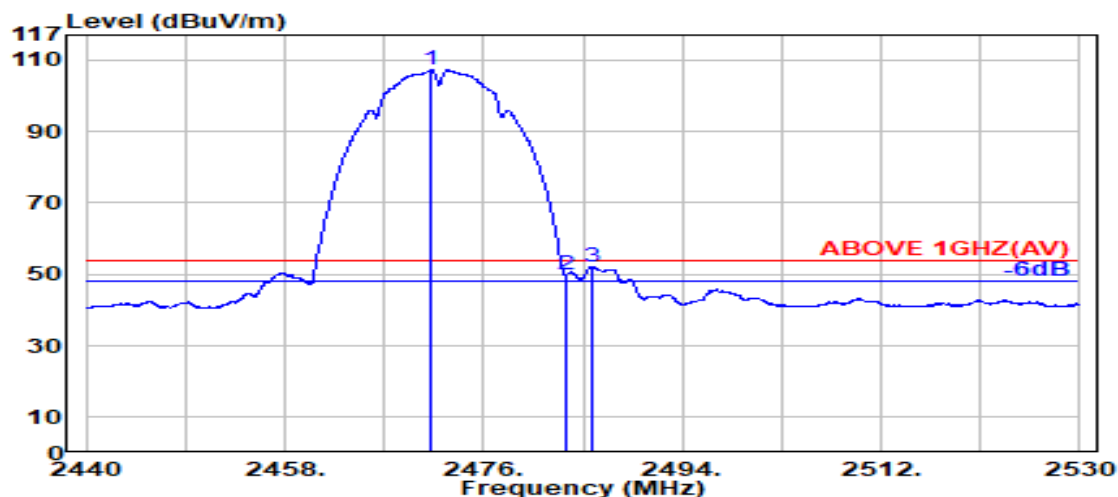

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.250	28.44	6.15	34.51	107.20	107.27	---	---	Average
2483.500	28.47	6.17	34.52	49.81	49.93	54.00	4.07	Average
2485.850	28.47	6.17	34.52	52.06	52.18	54.00	1.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

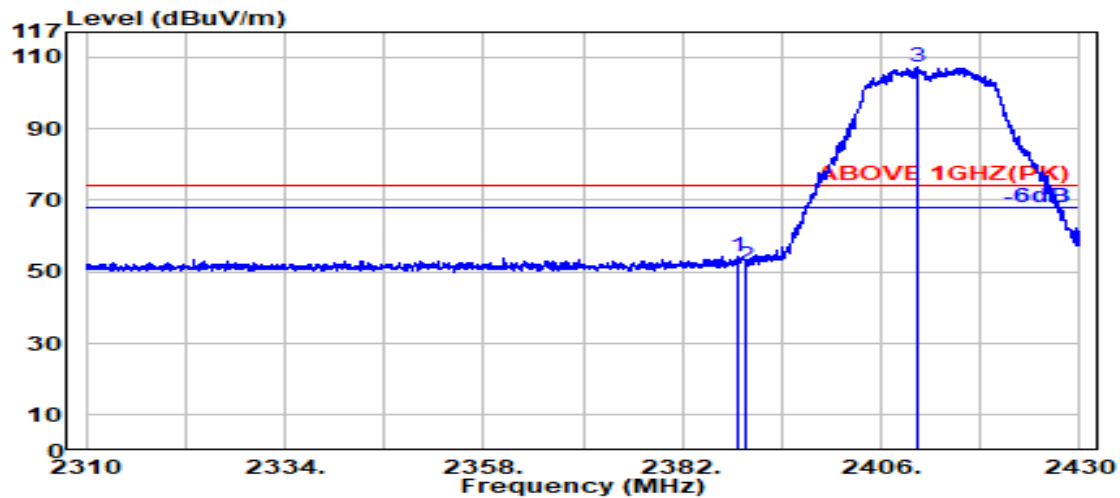

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.19	6.03	34.50	54.78	54.51	74.00	19.49	Peak
2389.800	28.18	6.03	34.50	51.79	51.51	74.00	22.49	Peak
@ 2410.300	28.16	6.06	34.50	107.35	107.08	---	---	Peak

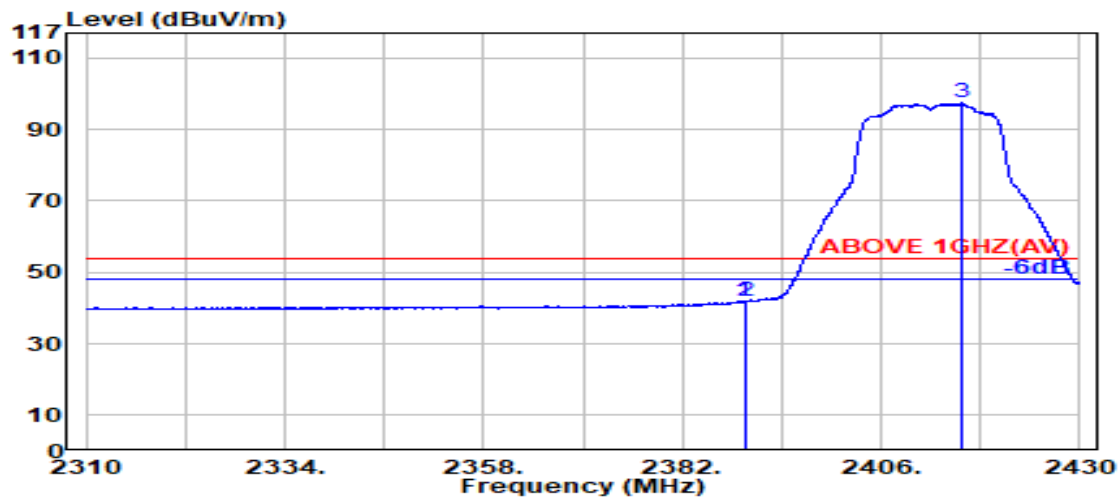

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	42.20	41.92	54.00	12.08	Average
2389.800	28.18	6.03	34.50	42.10	41.82	54.00	12.18	Average
@ 2415.750	28.20	6.07	34.50	97.67	97.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

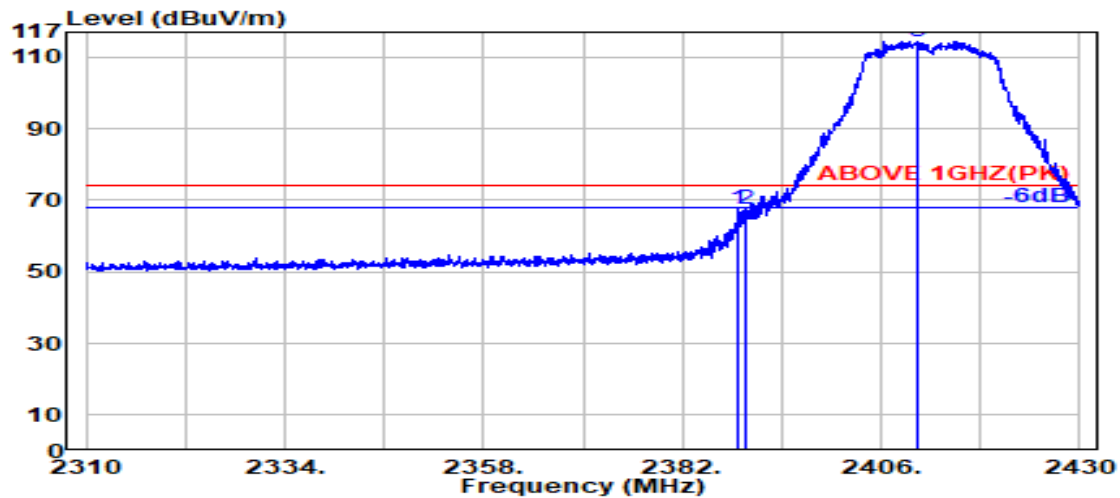

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.19	6.03	34.50	67.82	67.54	74.00	6.46	Peak
2389.800	28.18	6.03	34.50	67.77	67.49	74.00	6.51	Peak
@ 2410.400	28.16	6.06	34.50	114.70	114.42	---	---	Peak

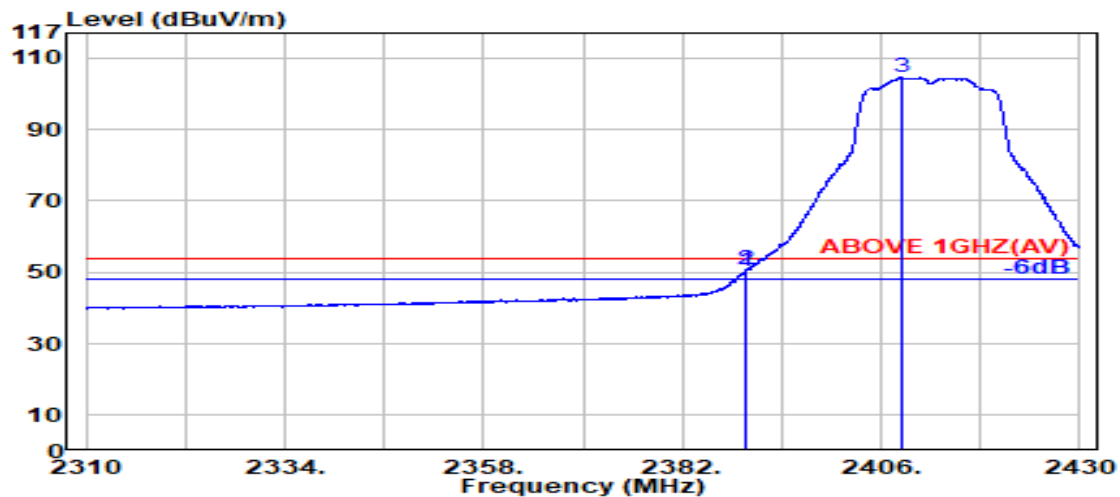

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	50.58	50.30	54.00	3.70	Average
2389.800	28.18	6.03	34.50	50.95	50.67	54.00	3.33	Average
@ 2408.400	28.15	6.06	34.50	104.86	104.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

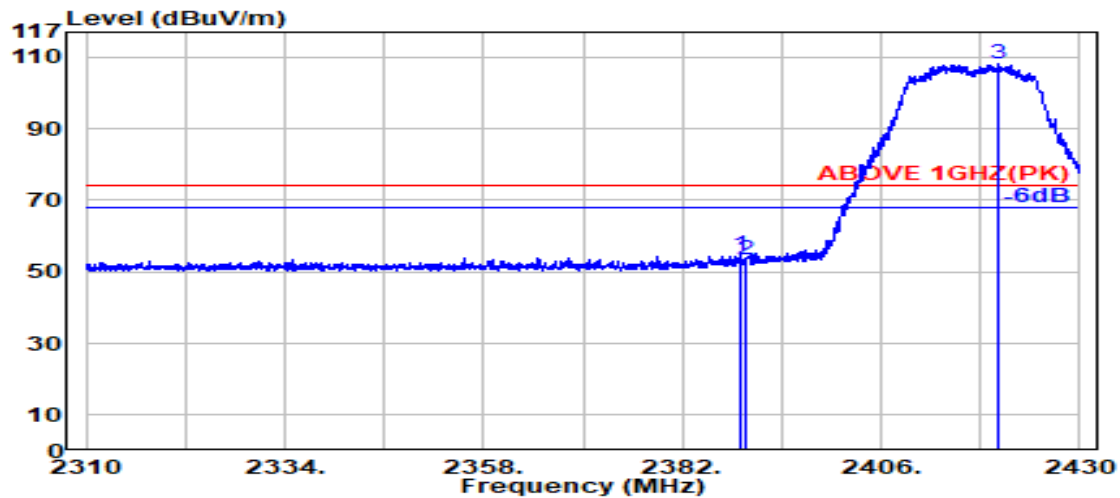

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.19	6.03	34.50	54.84	54.56	74.00	19.44	Peak
2389.800	28.18	6.03	34.50	53.86	53.58	74.00	20.42	Peak
@ 2420.050	28.22	6.08	34.50	108.25	108.05	---	---	Peak

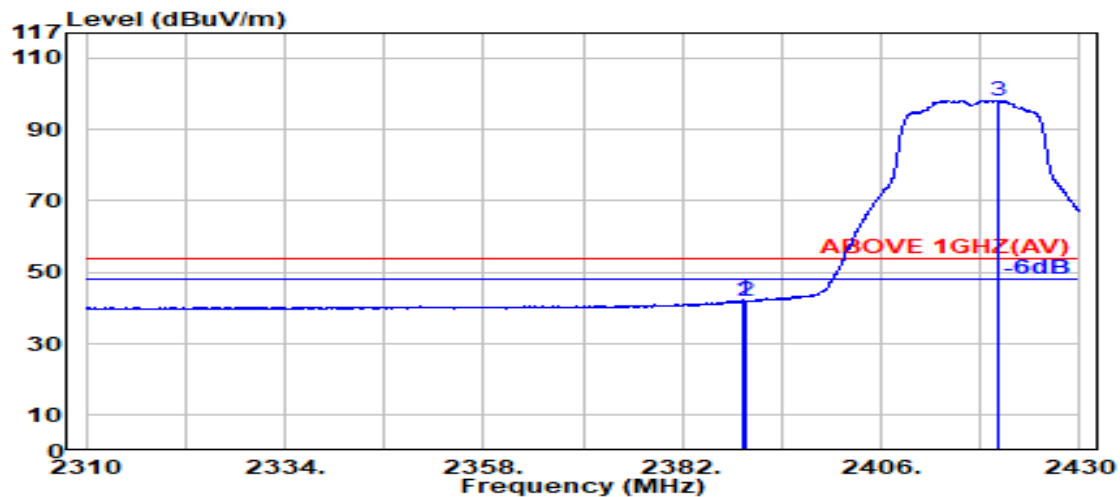

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	42.45	42.17	54.00	11.83	Average
2389.800	28.18	6.03	34.50	42.16	41.88	54.00	12.12	Average
@ 2420.000	28.22	6.08	34.50	98.43	98.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

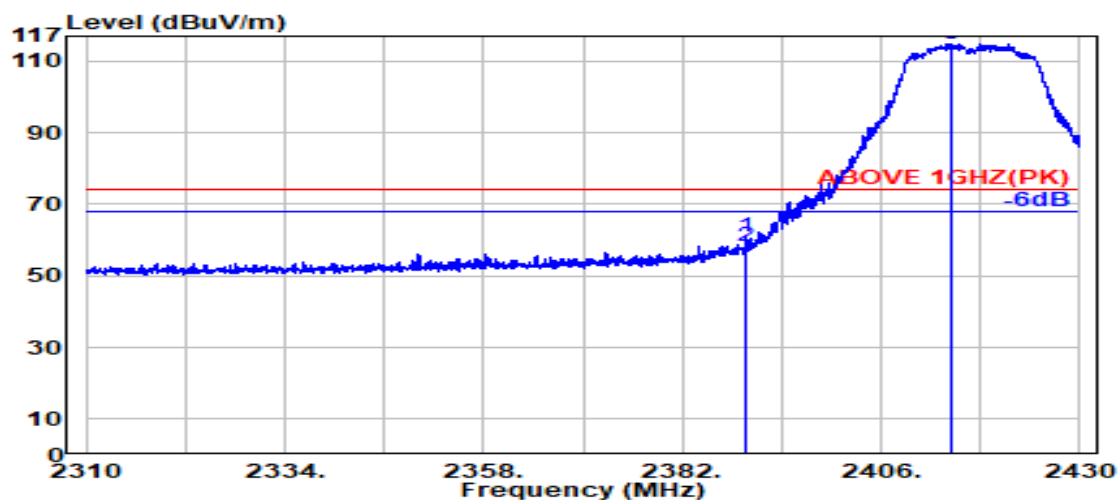

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	61.08	60.80	74.00	13.20	Peak
2389.800	28.18	6.03	34.50	58.57	58.29	74.00	15.71	Peak
@ 2414.600	28.19	6.07	34.50	115.23	114.98	---	---	Peak

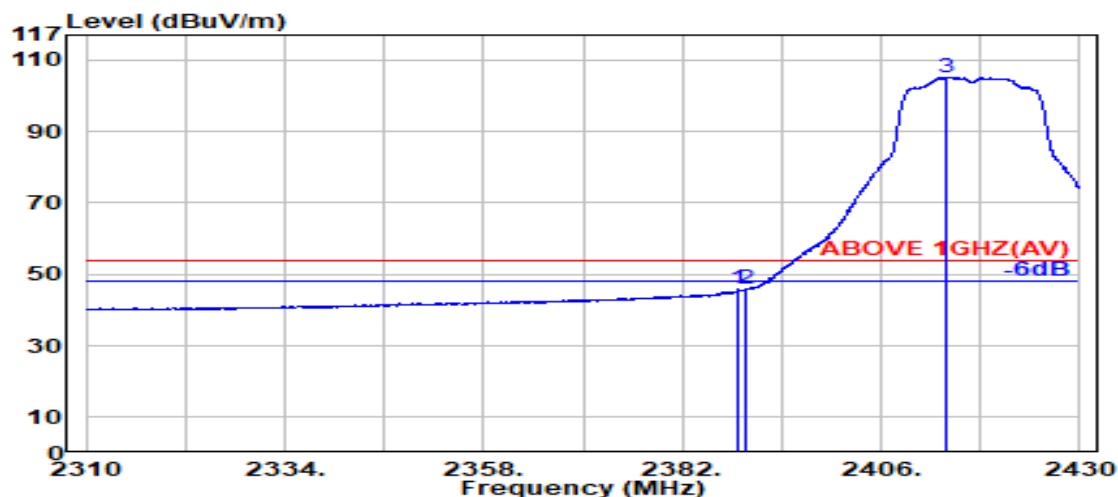

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.50	46.11	45.83	54.00	8.17	Average
2389.800	28.18	6.03	34.50	46.08	45.80	54.00	8.20	Average
@ 2413.800	28.18	6.07	34.50	105.43	105.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

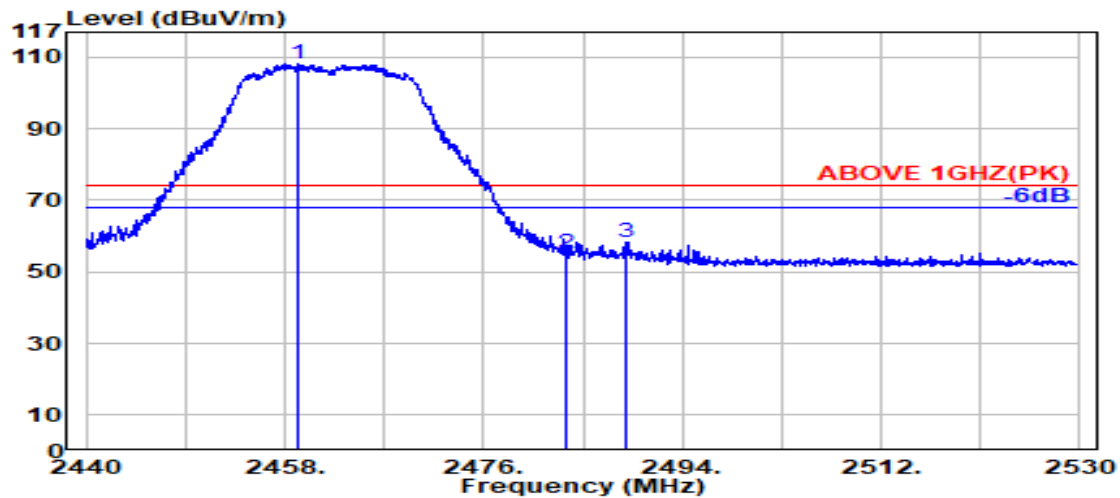

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.250	28.42	6.13	34.51	108.17	108.21	---	---	Peak
2483.500	28.47	6.17	34.52	55.18	55.30	74.00	18.70	Peak
2489.000	28.48	6.17	34.52	58.20	58.34	74.00	15.66	Peak

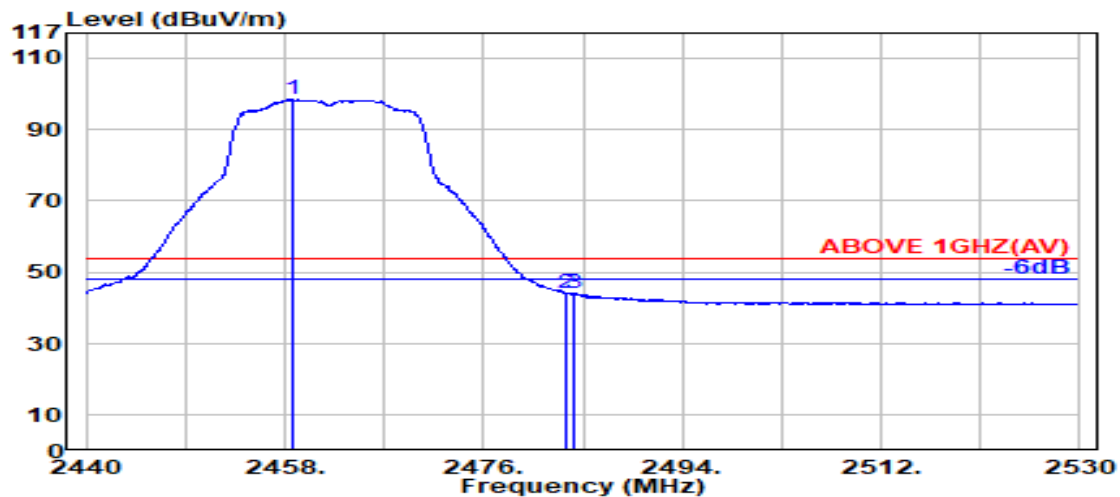

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	28.42	6.13	34.51	98.41	98.45	---	---	Average
2483.500	28.47	6.17	34.52	43.93	44.04	54.00	9.96	Average
2484.150	28.47	6.17	34.52	44.16	44.28	54.00	9.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

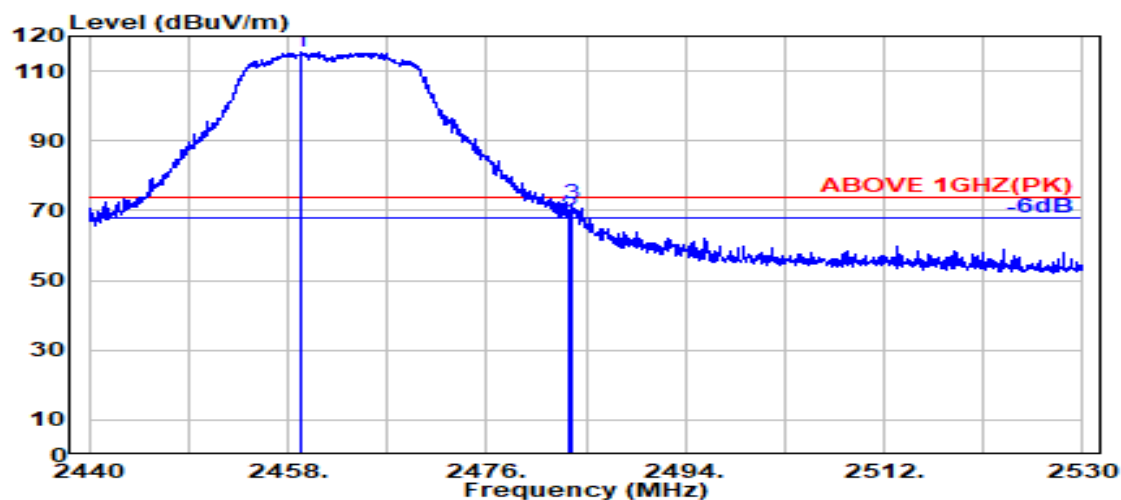

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.150	28.42	6.13	34.51	115.29	115.33	---	---	Peak
2483.500	28.47	6.17	34.52	68.11	68.23	74.00	5.77	Peak
2483.700	28.47	6.17	34.52	71.88	72.00	74.00	2.00	Peak

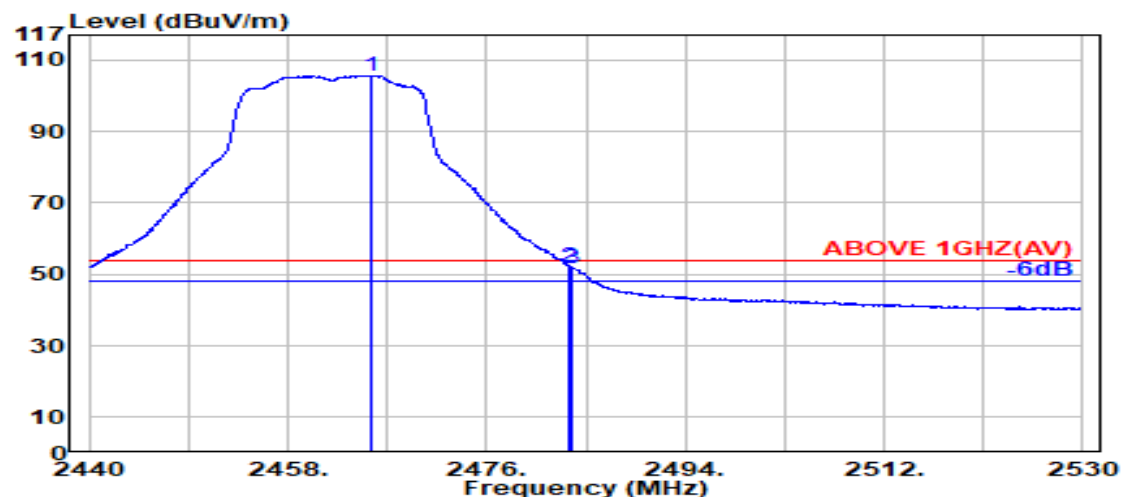

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.450	28.43	6.14	34.51	105.68	105.74	---	---	Average
2483.500	28.47	6.17	34.52	52.00	52.12	54.00	1.88	Average
2483.700	28.47	6.17	34.52	51.73	51.85	54.00	2.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

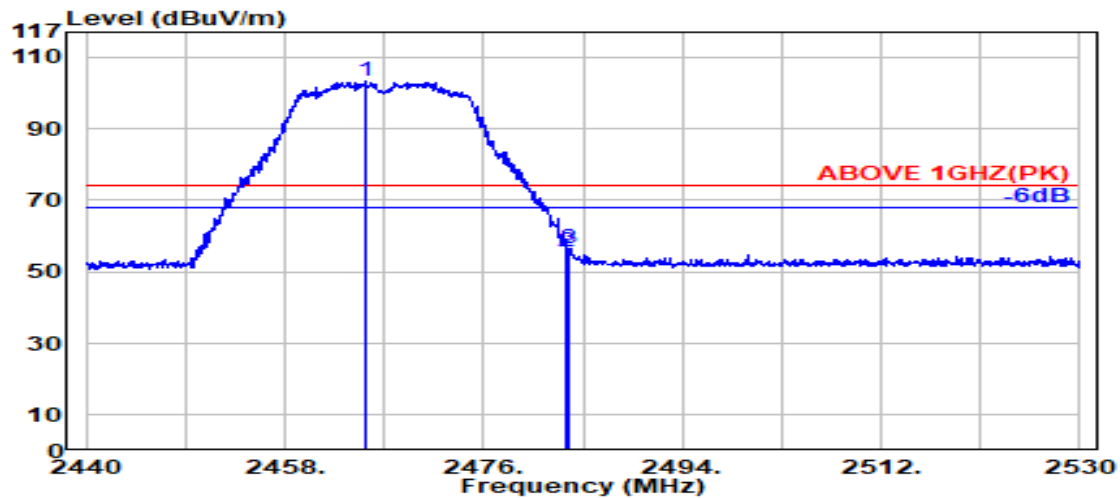

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.250	28.43	6.14	34.51	103.06	103.11	---	---	Peak
2483.500	28.47	6.17	34.52	55.68	55.79	74.00	18.21	Peak
2483.800	28.47	6.17	34.52	56.60	56.72	74.00	17.28	Peak

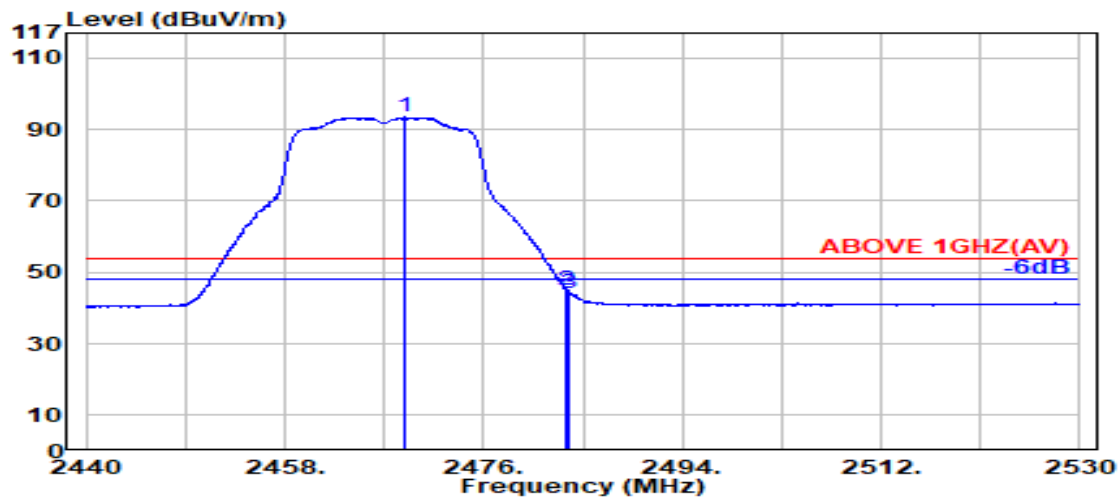

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.850	28.44	6.15	34.51	93.41	93.48	---	---	Average
2483.500	28.47	6.17	34.52	44.93	45.05	54.00	8.95	Average
2483.700	28.47	6.17	34.52	44.20	44.32	54.00	9.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

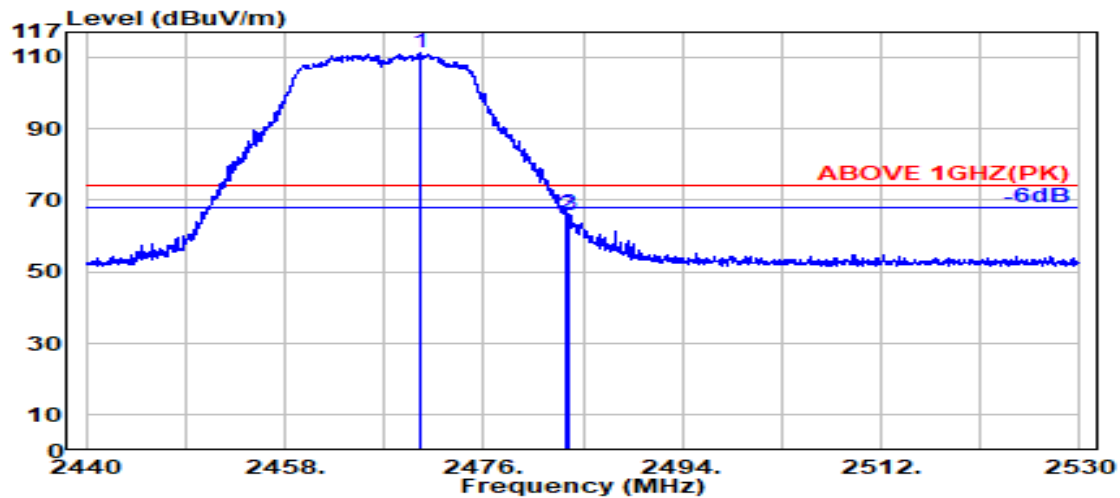

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.350	28.44	6.15	34.51	111.14	111.21	---	---	Peak
2483.500	28.47	6.17	34.52	65.79	65.91	74.00	8.09	Peak
2483.800	28.47	6.17	34.52	66.02	66.13	74.00	7.87	Peak

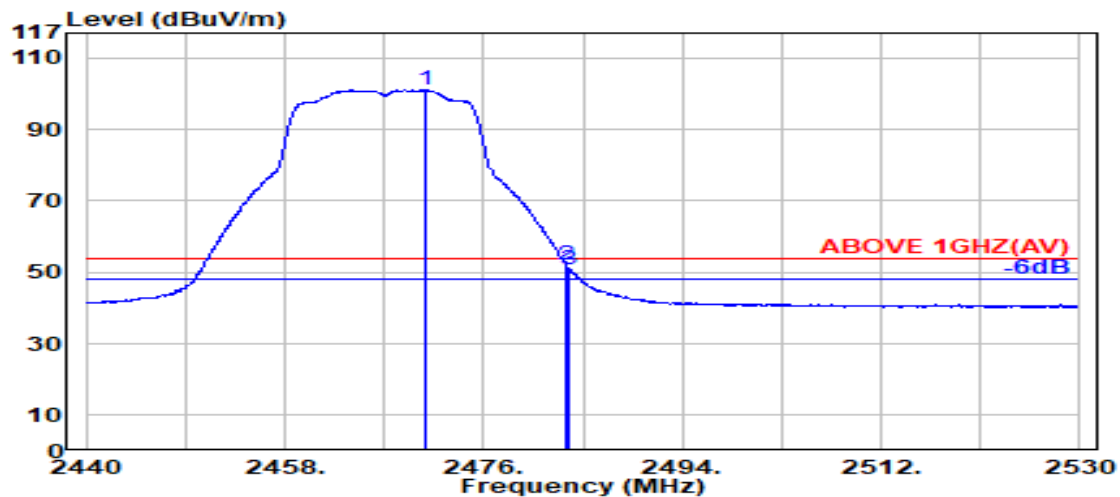

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.700	28.44	6.15	34.51	100.96	101.03	---	---	Average
2483.500	28.47	6.17	34.52	52.02	52.13	54.00	1.87	Average
2483.700	28.47	6.17	34.52	50.83	50.95	54.00	3.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

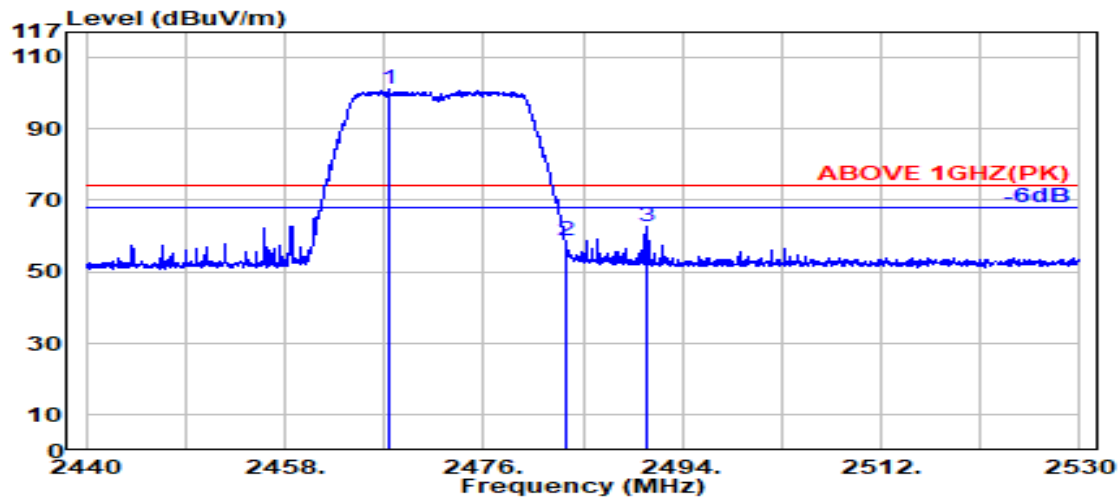

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.350	28.43	6.14	34.51	101.09	101.15	---	---	Peak
2483.500	28.47	6.17	34.52	58.50	58.62	74.00	15.38	Peak
2490.700	28.48	6.18	34.52	62.53	62.67	74.00	11.33	Peak

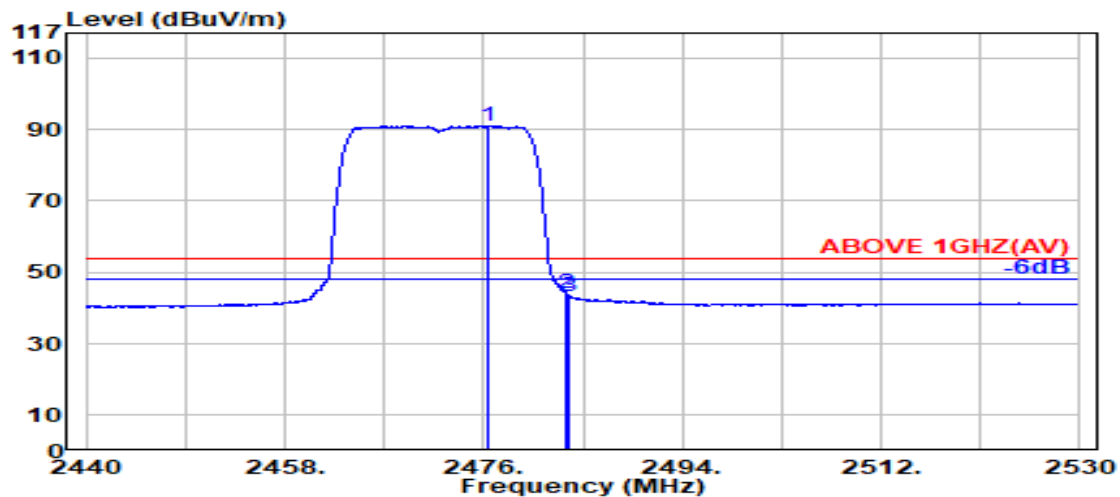

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.350	28.45	6.16	34.52	91.05	91.14	---	---	Average
2483.500	28.47	6.17	34.52	43.89	44.00	54.00	10.00	Average
2483.700	28.47	6.17	34.52	43.30	43.41	54.00	10.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

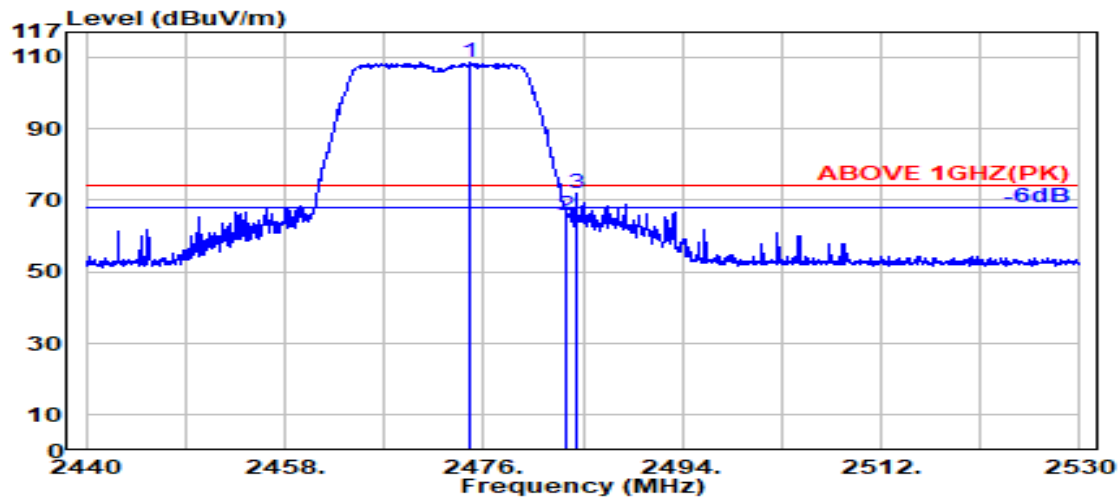

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.850	28.45	6.16	34.52	108.51	108.60	---	---	Peak
2483.500	28.47	6.17	34.52	65.87	65.98	74.00	8.02	Peak
2484.350	28.47	6.17	34.52	71.66	71.78	74.00	2.22	Peak

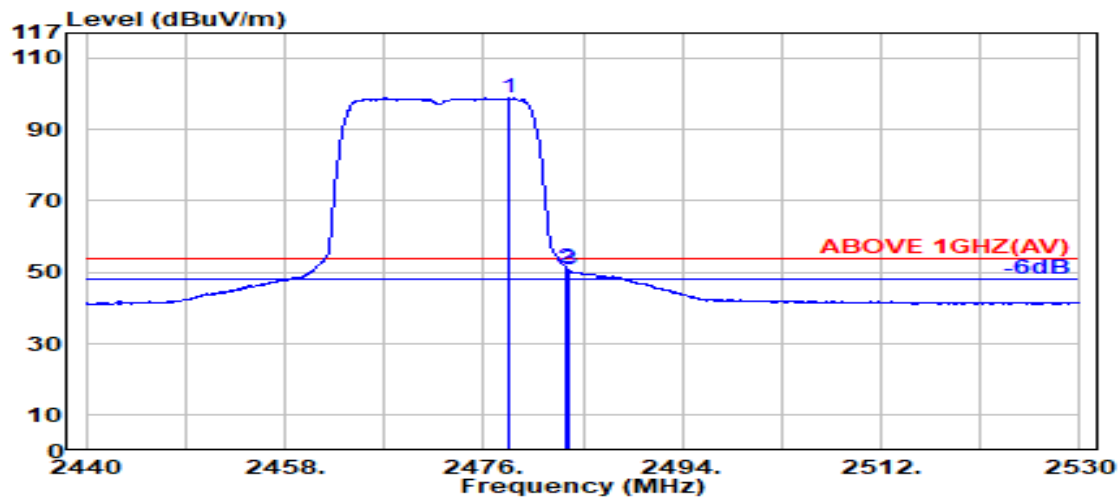

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.250	28.46	6.16	34.52	98.73	98.83	---	---	Average
2483.500	28.47	6.17	34.52	51.03	51.15	54.00	2.85	Average
2483.700	28.47	6.17	34.52	50.48	50.60	54.00	3.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

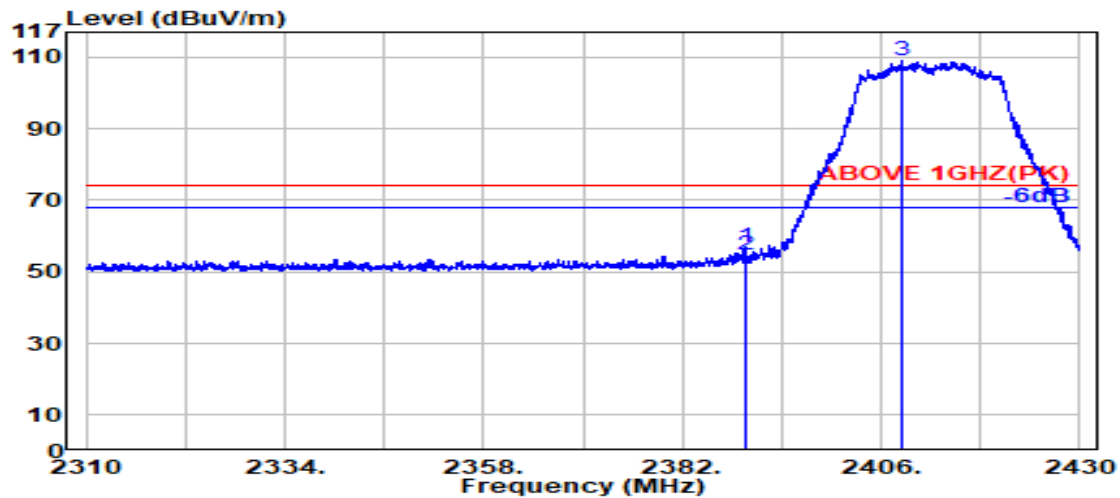

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	57.20	56.91	74.00	17.09	Peak
2389.800	28.18	6.03	34.50	55.11	54.82	74.00	19.18	Peak
@ 2408.450	28.15	6.06	34.50	109.16	108.87	---	---	Peak

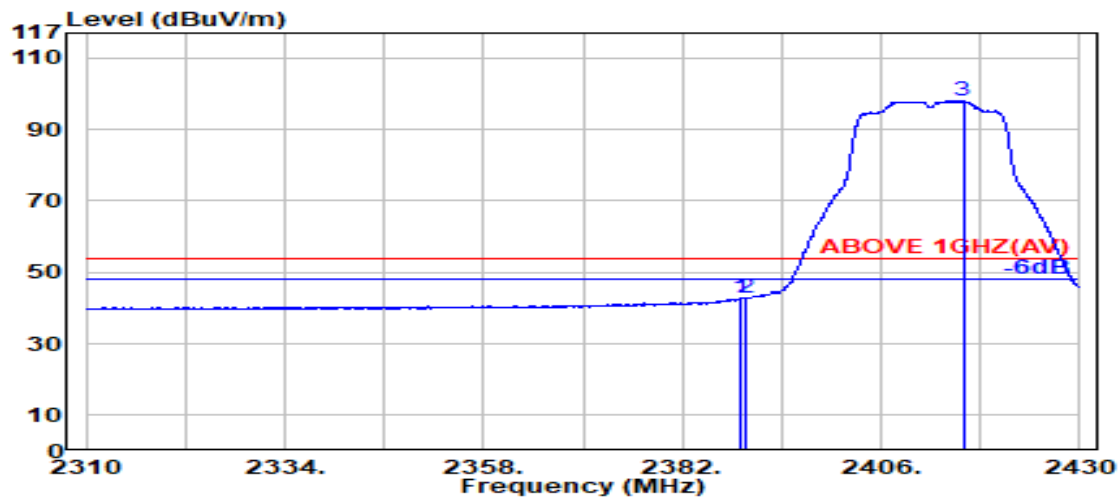

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.50	43.30	43.02	54.00	10.98	Average
2389.800	28.18	6.03	34.50	43.08	42.80	54.00	11.20	Average
@ 2415.900	28.20	6.07	34.50	98.33	98.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

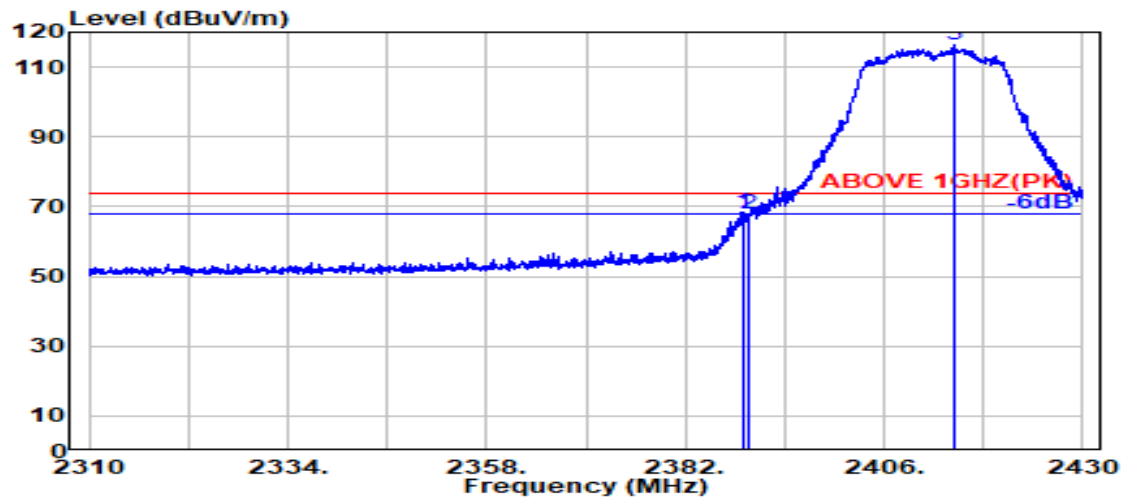

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.50	68.58	68.30	74.00	5.70	Peak
2389.800	28.18	6.03	34.50	68.01	67.73	74.00	6.27	Peak
@ 2414.500	28.19	6.07	34.50	116.57	116.33	---	---	Peak

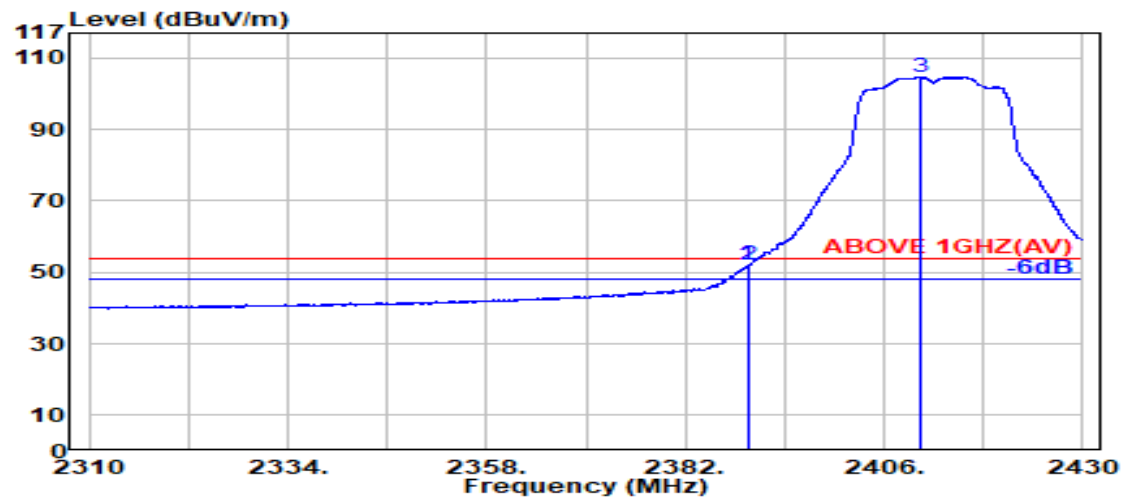

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	52.31	52.03	54.00	1.97	Average
2389.800	28.18	6.03	34.50	52.37	52.09	54.00	1.91	Average
@ 2410.450	28.16	6.06	34.50	105.03	104.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

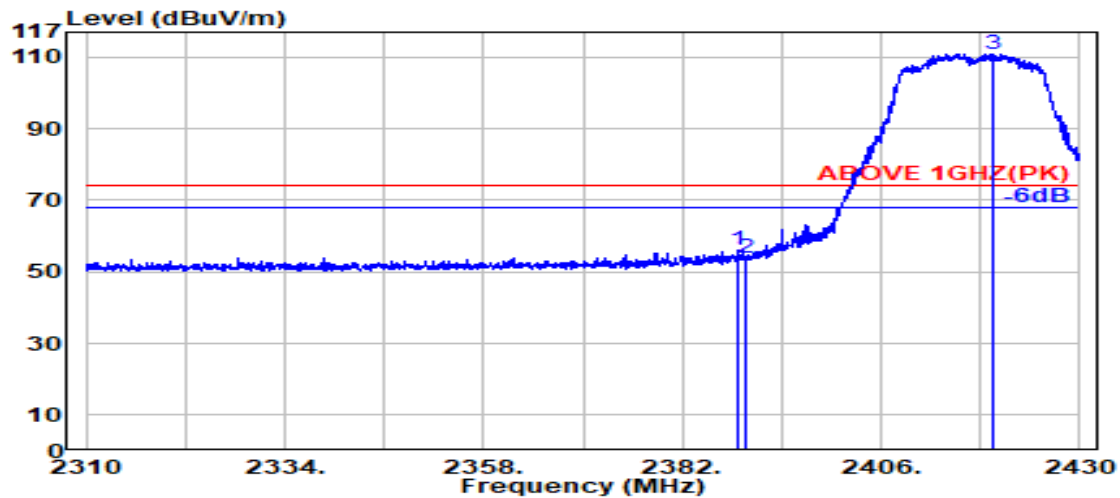

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.19	6.03	34.50	56.21	55.94	74.00	18.06	Peak
2389.800	28.18	6.03	34.50	54.28	54.00	74.00	20.00	Peak
@ 2419.400	28.22	6.08	34.50	111.22	111.01	---	---	Peak

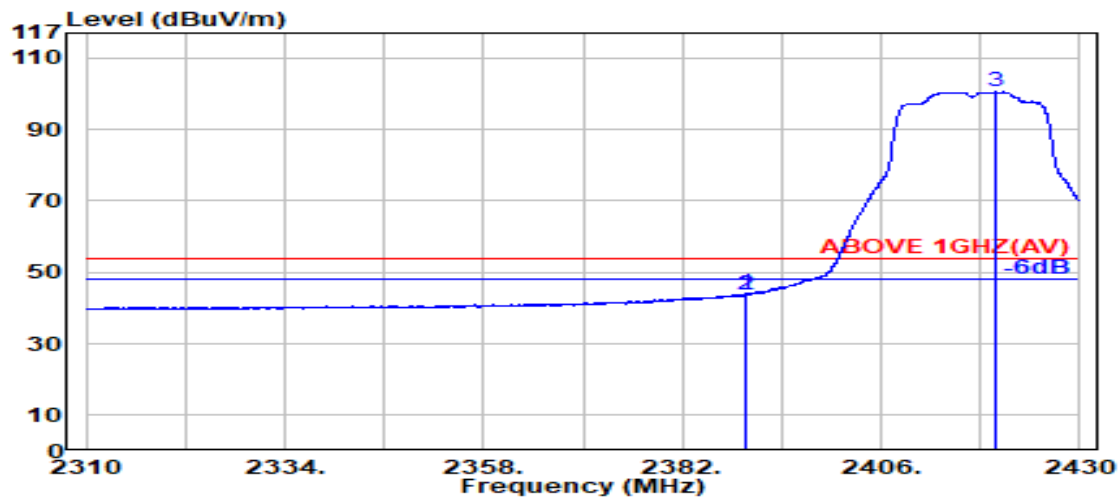

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	44.27	43.99	54.00	10.01	Average
2389.800	28.18	6.03	34.50	44.19	43.91	54.00	10.09	Average
@ 2419.850	28.22	6.08	34.50	100.95	100.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

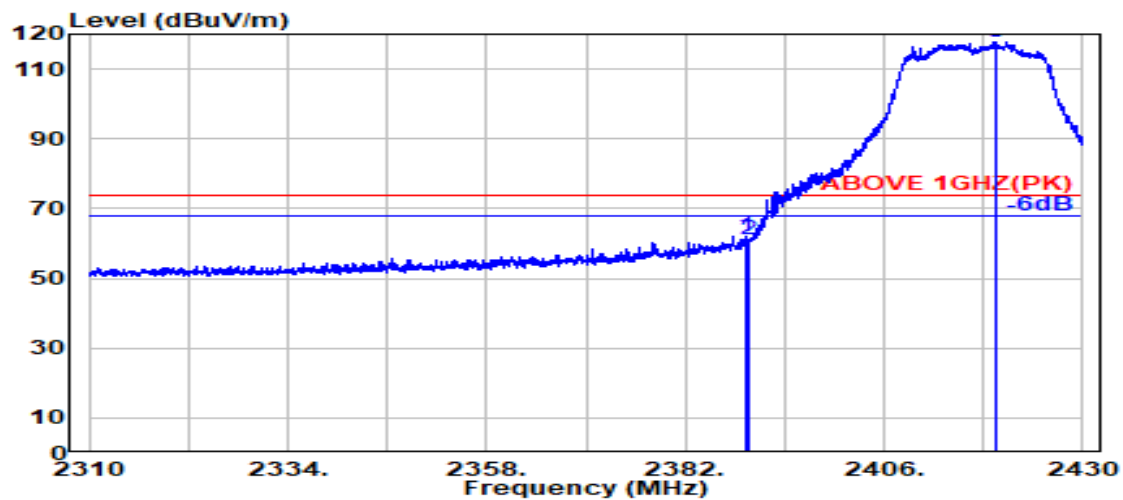

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	62.50	62.22	74.00	11.78	Peak
2389.800	28.18	6.03	34.50	61.21	60.92	74.00	13.08	Peak
@ 2419.500	28.22	6.08	34.50	118.17	117.96	---	---	Peak

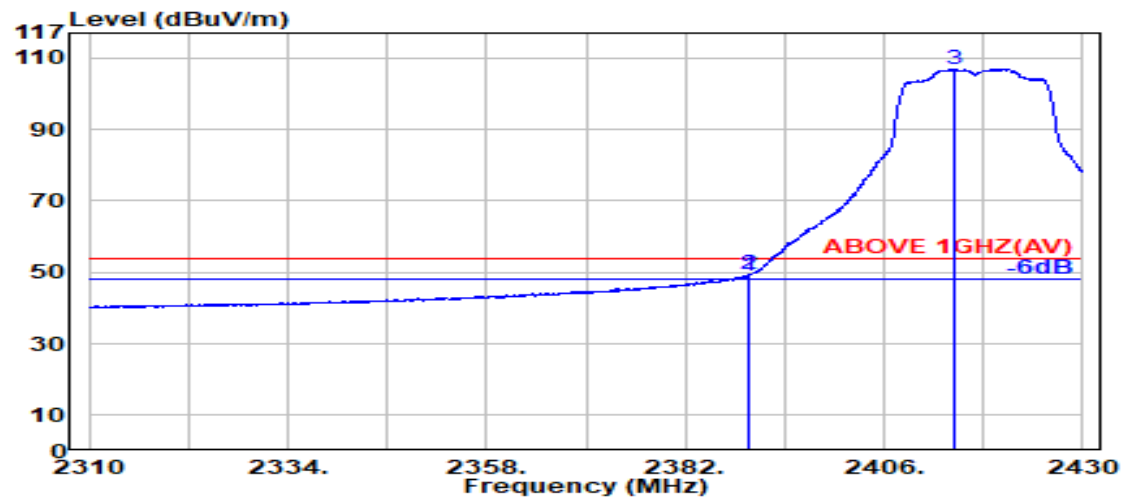

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	49.34	49.06	54.00	4.94	Average
2389.800	28.18	6.03	34.50	49.73	49.44	54.00	4.56	Average
@ 2414.550	28.19	6.07	34.50	107.08	106.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

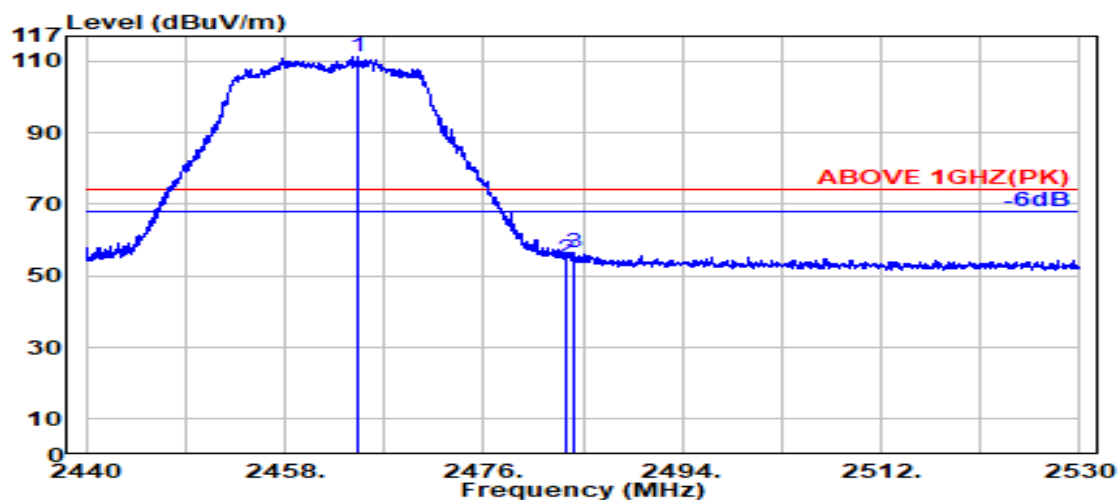

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.43	6.14	34.51	111.24	111.30	---	---	Peak
2483.500	28.47	6.17	34.52	54.73	54.85	74.00	19.15	Peak
2484.150	28.47	6.17	34.52	56.29	56.41	74.00	17.59	Peak

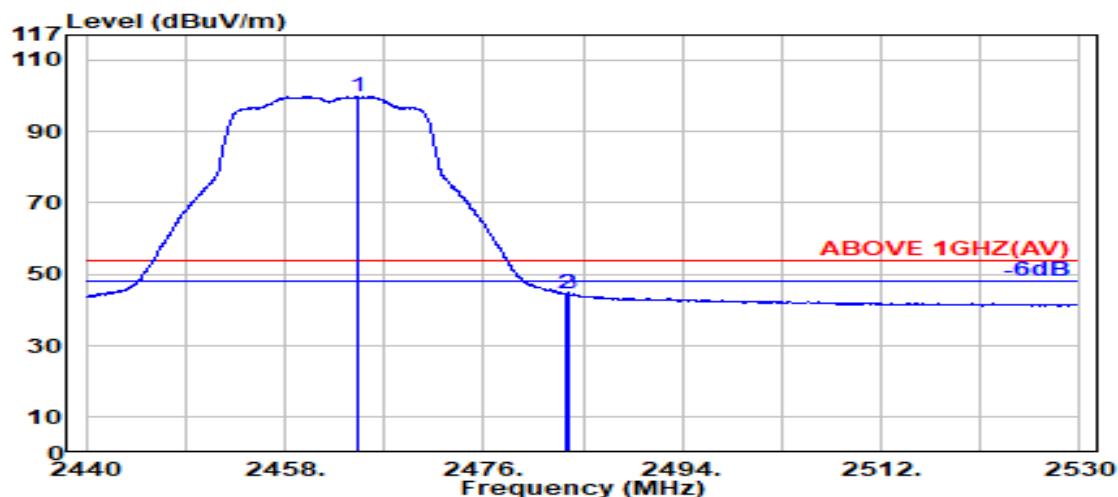

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.43	6.14	34.51	99.73	99.78	---	---	Average
2483.500	28.47	6.17	34.52	44.43	44.55	54.00	9.45	Average
2483.700	28.47	6.17	34.52	44.43	44.55	54.00	9.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

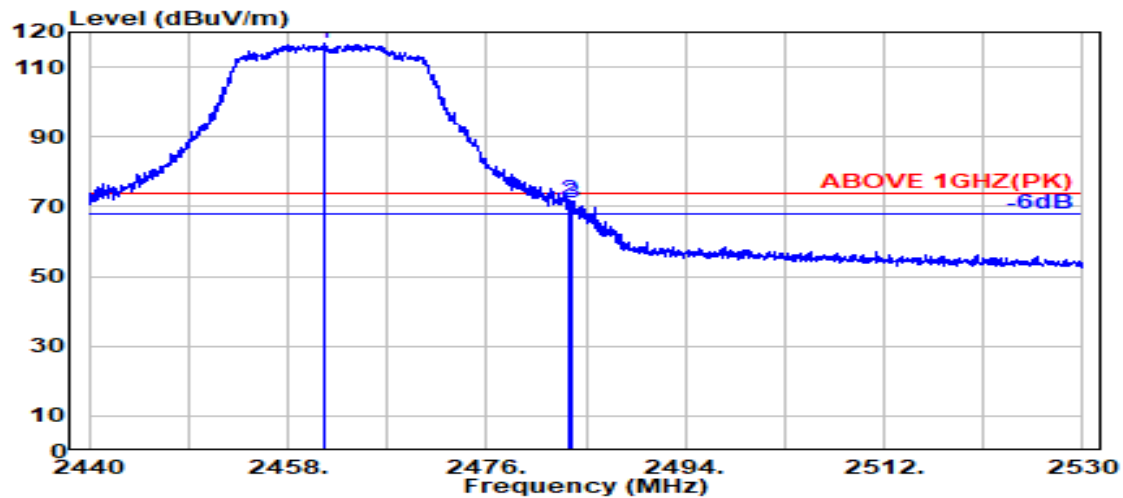

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.350	28.42	6.14	34.51	116.58	116.63	---	---	Peak
2483.500	28.47	6.17	34.52	71.69	71.81	74.00	2.19	Peak
2483.800	28.47	6.17	34.52	71.03	71.15	74.00	2.85	Peak

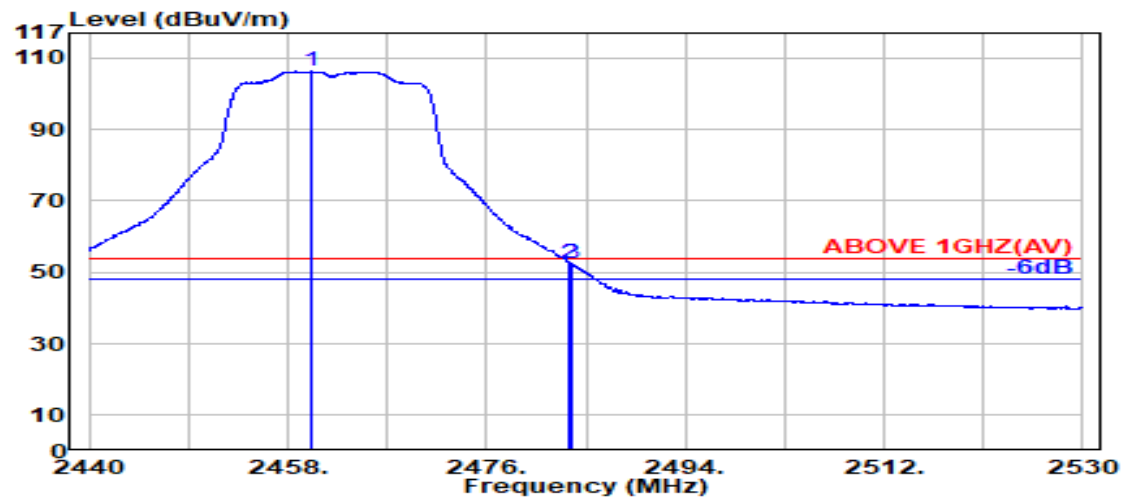

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.150	28.42	6.13	34.51	106.21	106.25	---	---	Average
2483.500	28.47	6.17	34.52	52.37	52.49	54.00	1.51	Average
2483.750	28.47	6.17	34.52	52.35	52.47	54.00	1.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

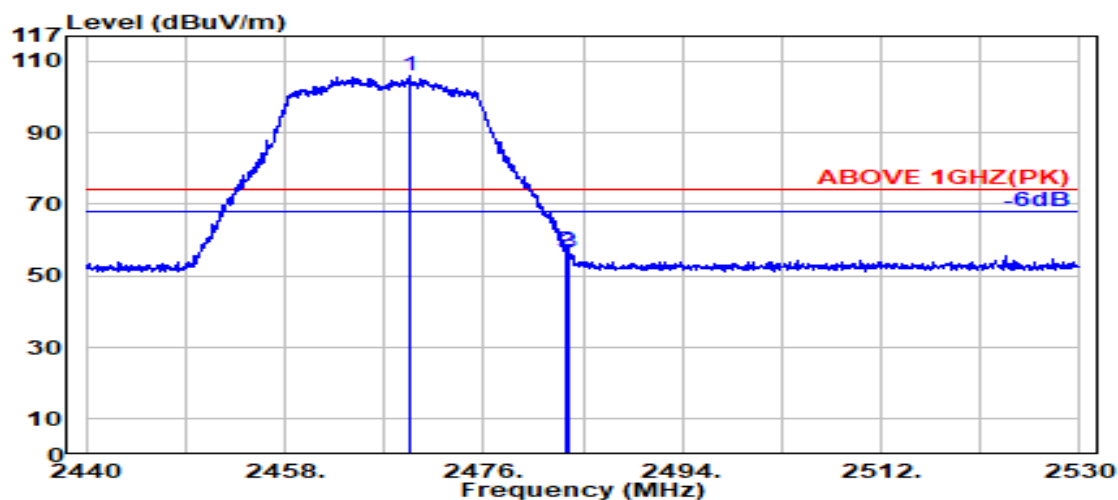

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.250	28.44	6.15	34.51	105.79	105.86	---	---	Peak
2483.500	28.47	6.17	34.52	56.75	56.87	74.00	17.13	Peak
2483.750	28.47	6.17	34.52	56.61	56.73	74.00	17.27	Peak

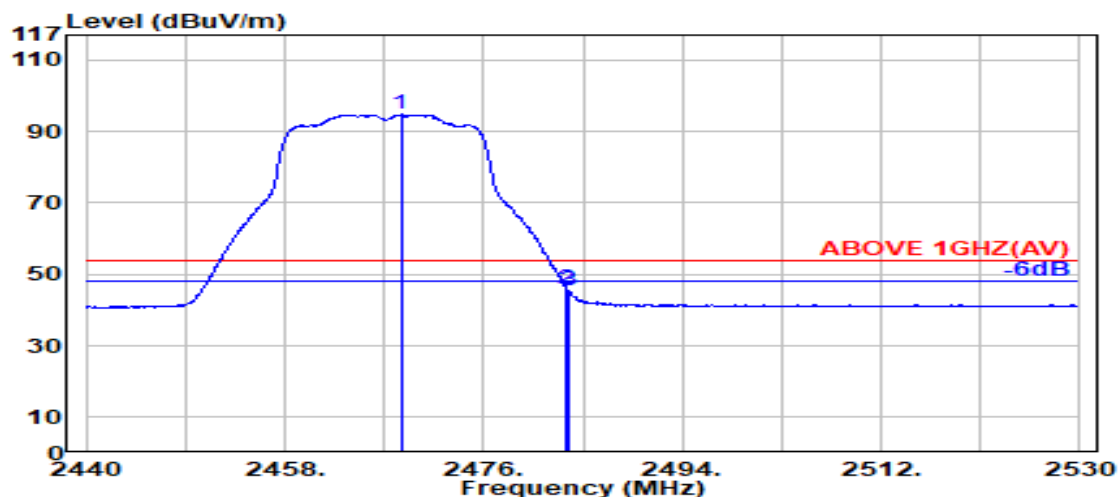

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.44	6.15	34.51	94.67	94.74	---	---	Average
2483.500	28.47	6.17	34.52	45.99	46.11	54.00	7.89	Average
2483.750	28.47	6.17	34.52	45.36	45.48	54.00	8.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

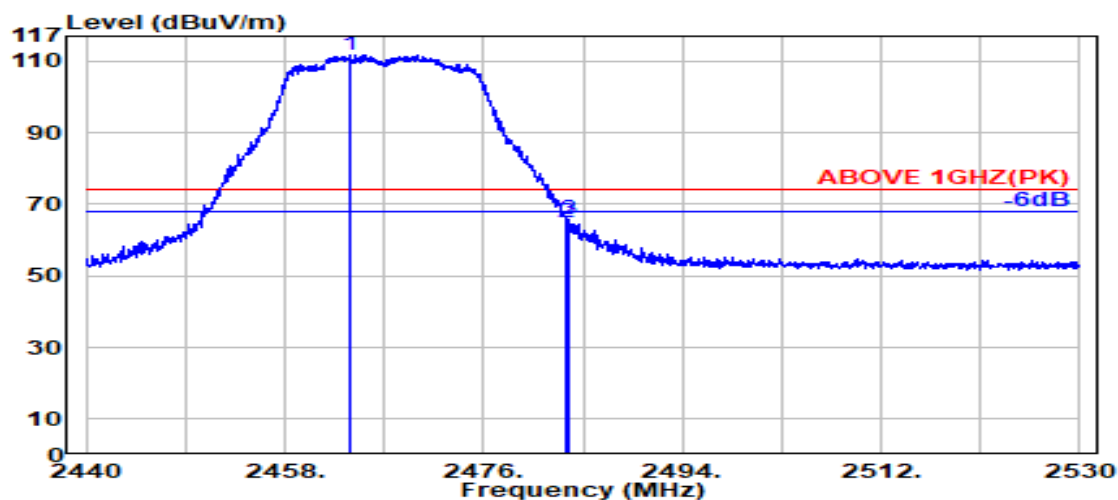

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.900	28.43	6.14	34.51	111.82	111.87	---	---	Peak
2483.500	28.47	6.17	34.52	64.85	64.97	74.00	9.03	Peak
2483.700	28.47	6.17	34.52	65.50	65.62	74.00	8.38	Peak

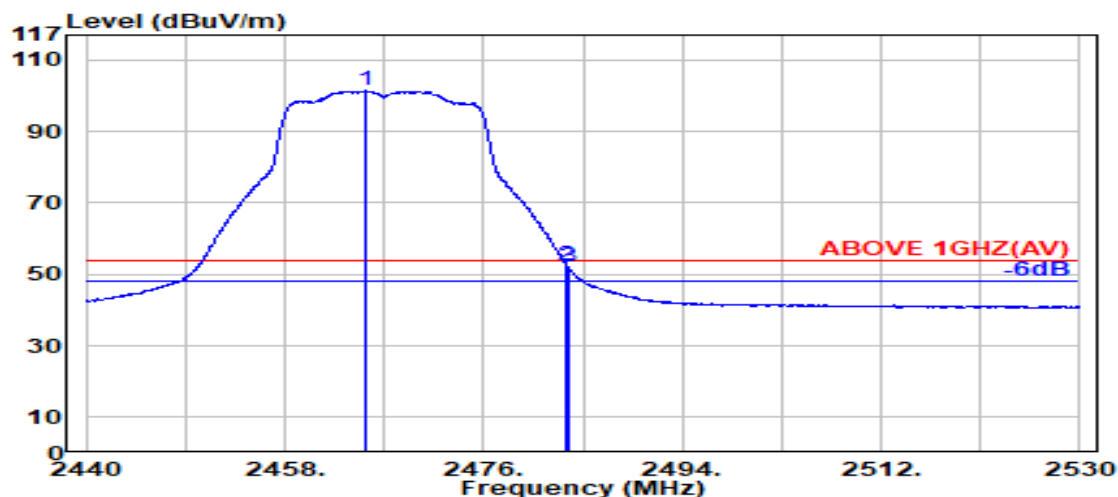

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	34.51	101.28	101.34	---	---	Average
2483.500	28.47	6.17	34.52	52.39	52.50	54.00	1.50	Average
2483.700	28.47	6.17	34.52	51.79	51.91	54.00	2.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

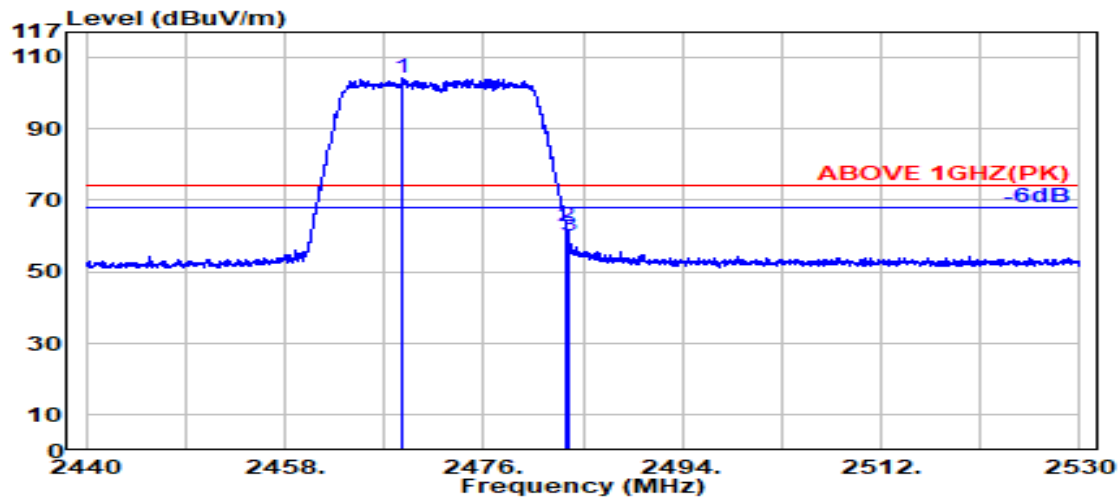

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.700	28.44	6.15	34.51	103.94	104.01	---	---	Peak
2483.500	28.47	6.17	34.52	62.36	62.48	74.00	11.52	Peak
2483.700	28.47	6.17	34.52	59.99	60.10	74.00	13.90	Peak

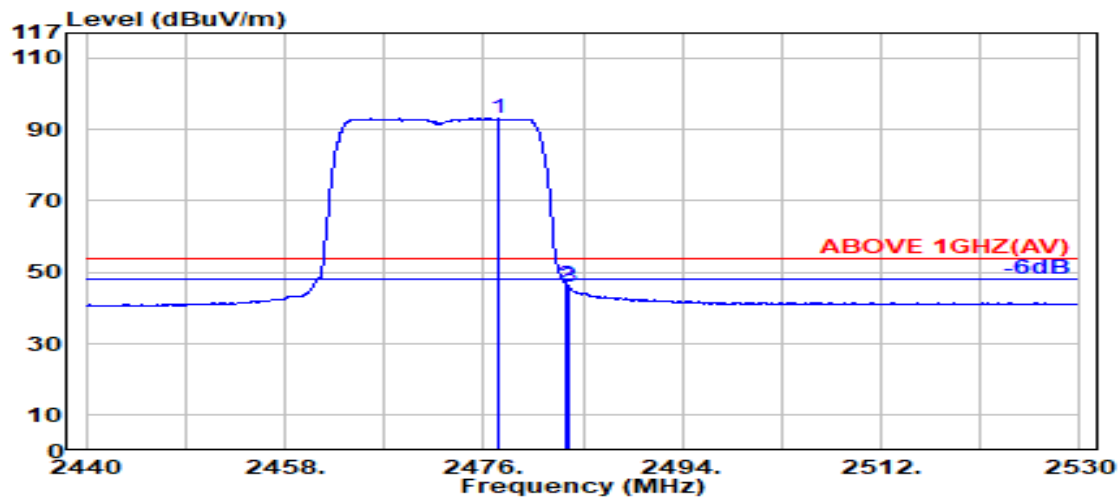

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.450	28.46	6.16	34.52	92.95	93.05	---	---	Average
2483.500	28.47	6.17	34.52	46.42	46.54	54.00	7.46	Average
2483.700	28.47	6.17	34.52	45.70	45.81	54.00	8.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

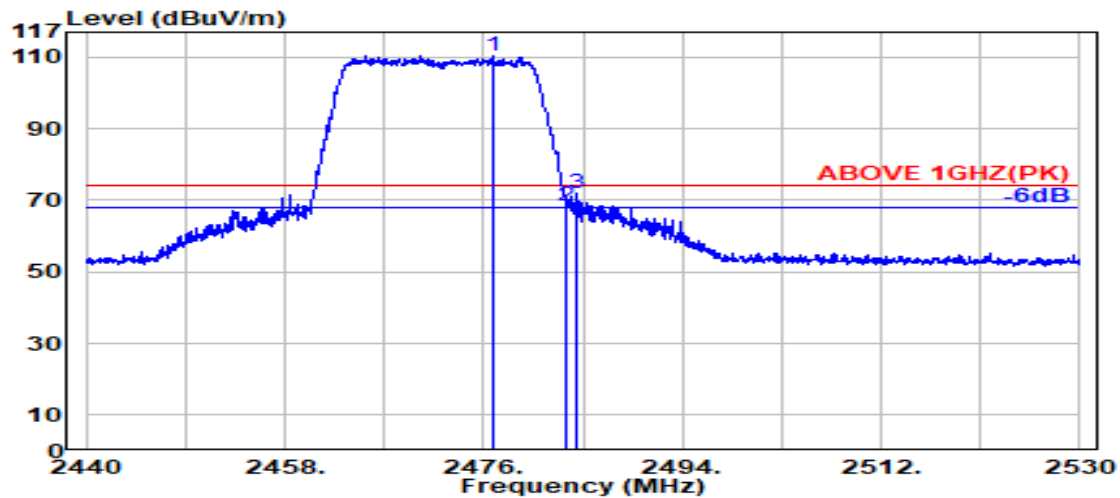

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.850	28.45	6.16	34.52	110.24	110.33	---	---	Peak
2483.500	28.47	6.17	34.52	68.41	68.53	74.00	5.47	Peak
2484.350	28.47	6.17	34.52	71.67	71.79	74.00	2.21	Peak

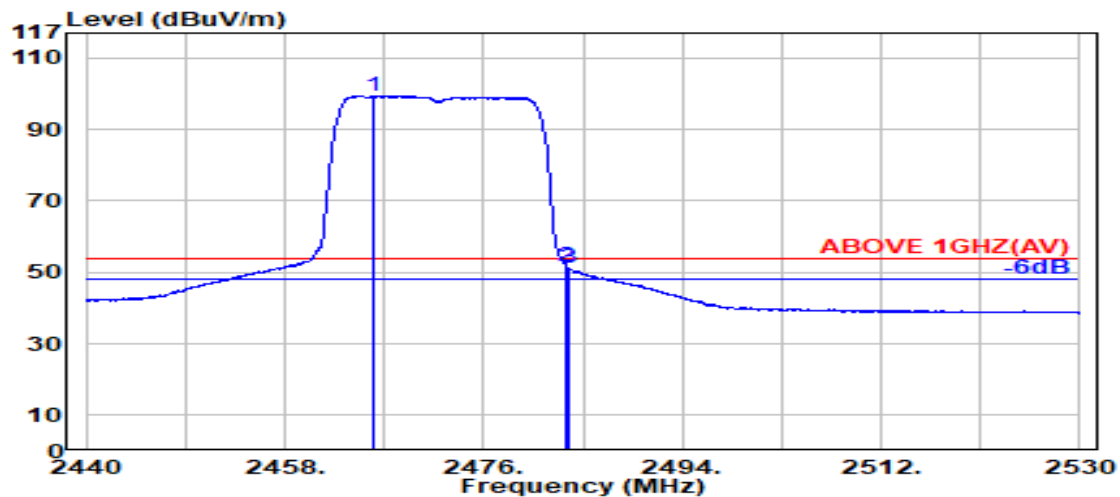

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.950	28.43	6.14	34.51	99.38	99.45	---	---	Average
2483.500	28.47	6.17	34.52	51.43	51.54	54.00	2.46	Average
2483.700	28.47	6.17	34.52	50.98	51.10	54.00	2.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

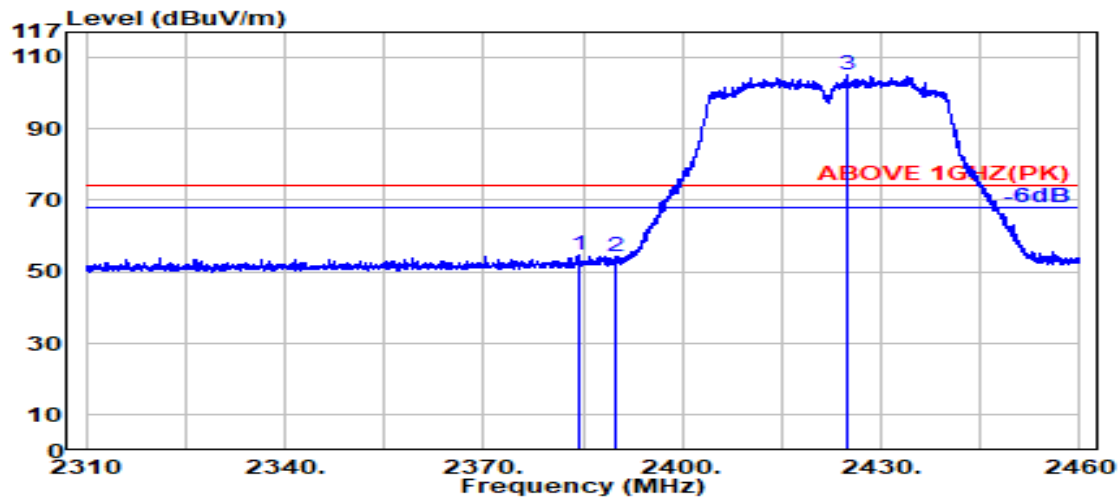

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.500	28.22	6.03	34.50	54.80	54.55	74.00	19.45	Peak
2389.800	28.18	6.03	34.50	54.41	54.13	74.00	19.87	Peak
@ 2424.800	28.25	6.08	34.50	105.14	104.97	---	---	Peak

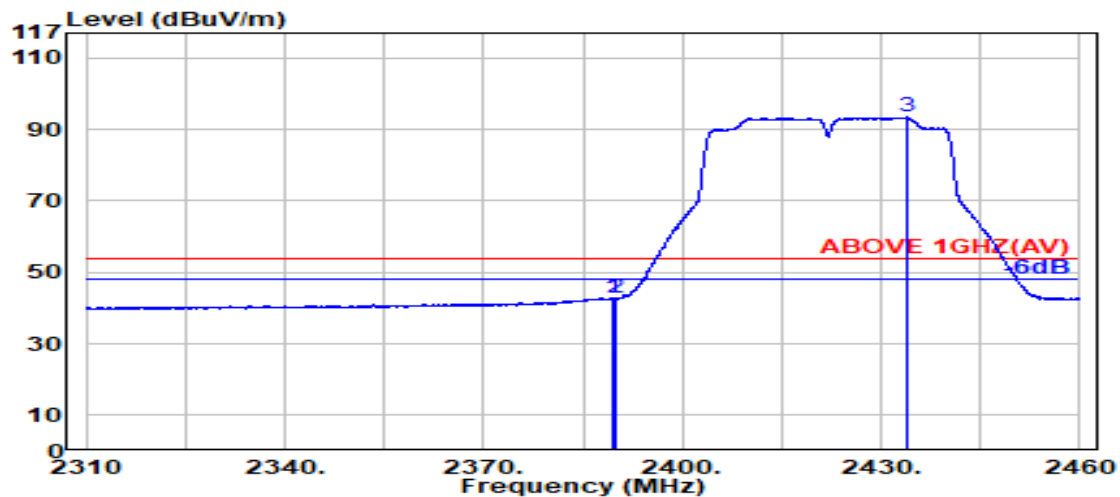

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	43.19	42.91	54.00	11.09	Average
2389.800	28.18	6.03	34.50	42.97	42.69	54.00	11.31	Average
@ 2433.900	28.30	6.10	34.51	93.49	93.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

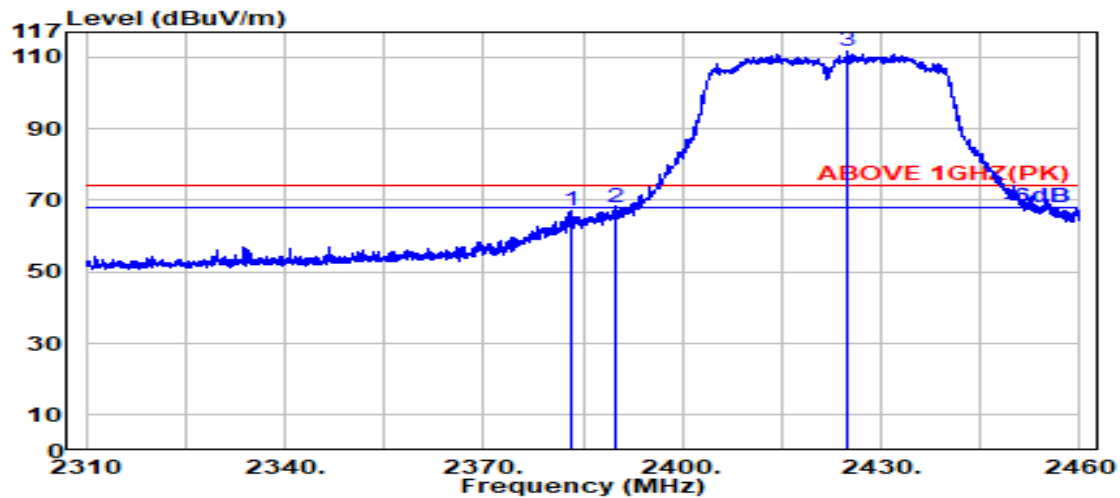

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.350	28.23	6.03	34.50	67.36	67.13	74.00	6.87	Peak
2389.800	28.18	6.03	34.50	68.43	68.15	74.00	5.85	Peak
@ 2424.800	28.25	6.08	34.50	111.69	111.52	---	---	Peak

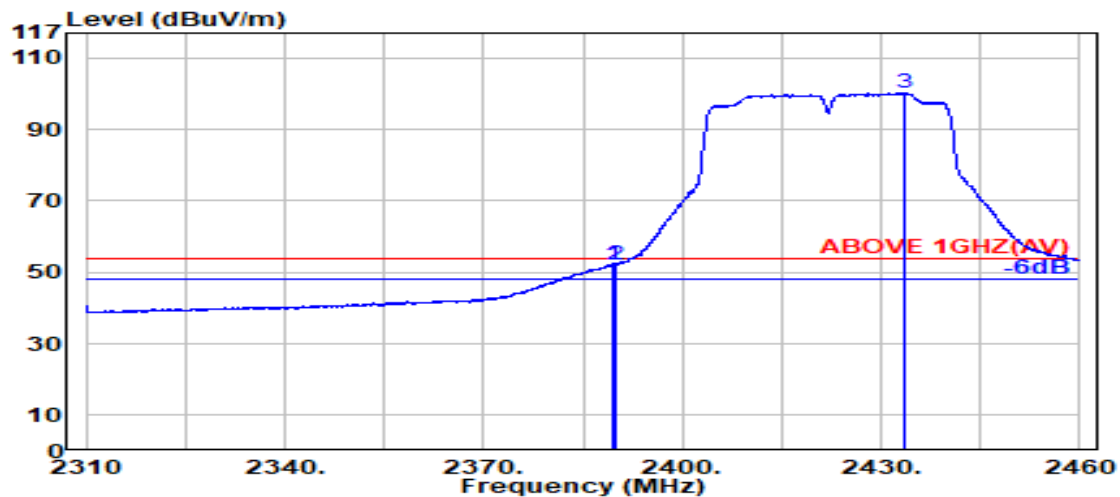

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	52.41	52.13	54.00	1.87	Average
2389.800	28.18	6.03	34.50	52.26	51.98	54.00	2.02	Average
@ 2433.500	28.30	6.10	34.51	100.50	100.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

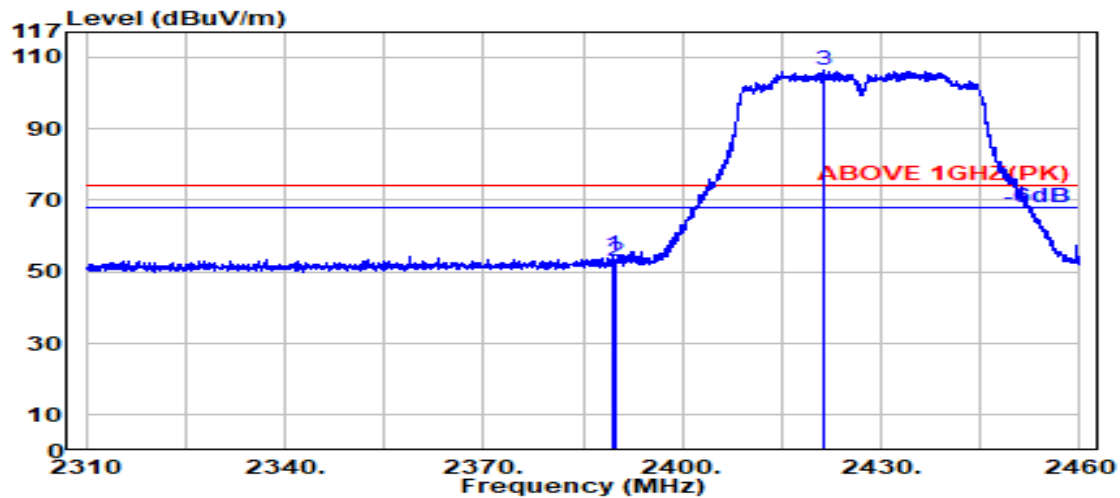

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	54.89	54.61	74.00	19.39	Peak
2389.800	28.18	6.03	34.50	53.11	52.82	74.00	21.18	Peak
@ 2421.350	28.23	6.08	34.50	106.59	106.39	---	---	Peak

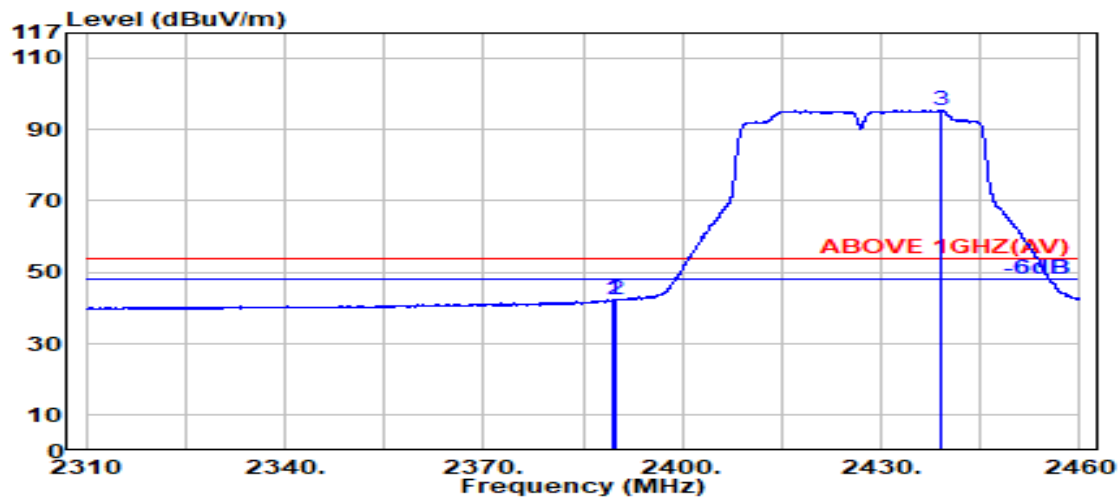

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	42.49	42.21	54.00	11.79	Average
2389.800	28.18	6.03	34.50	42.52	42.24	54.00	11.76	Average
@ 2439.200	28.34	6.11	34.51	95.60	95.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

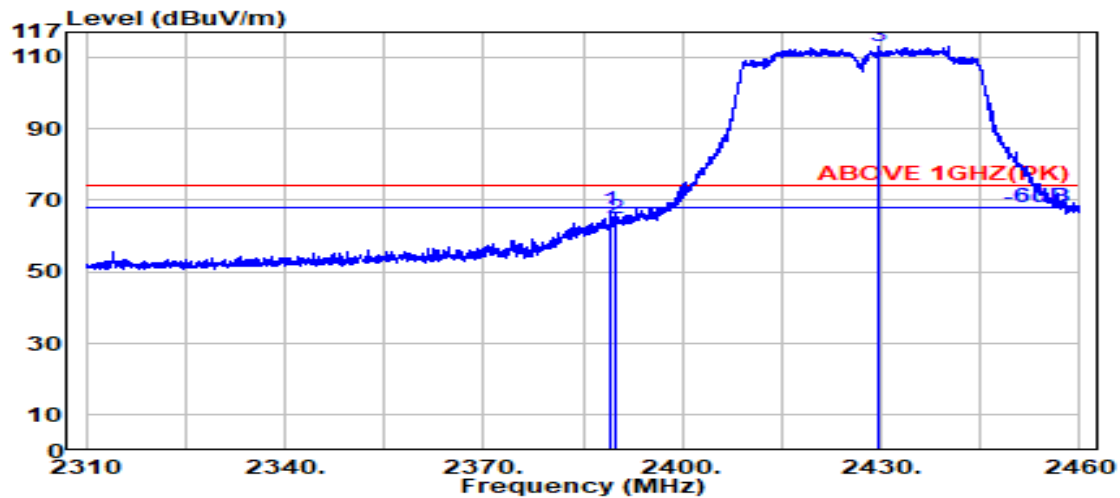

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.19	6.03	34.50	67.20	66.92	74.00	7.08	Peak
2389.800	28.18	6.03	34.50	65.04	64.76	74.00	9.24	Peak
@ 2429.700	28.28	6.09	34.51	113.28	113.15	---	---	Peak

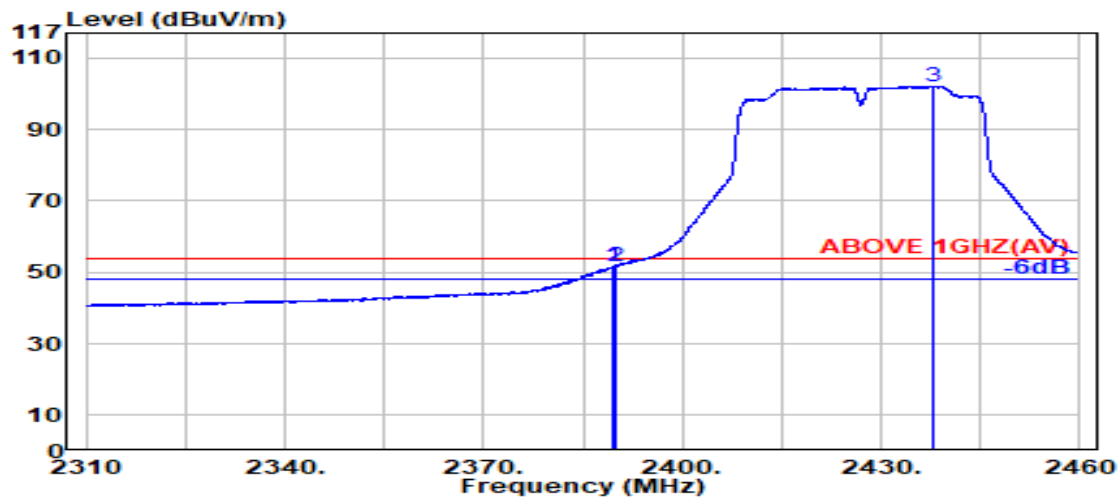

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	51.95	51.67	54.00	2.33	Average
2389.800	28.18	6.03	34.50	52.06	51.78	54.00	2.22	Average
@ 2438.000	28.33	6.10	34.51	102.26	102.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

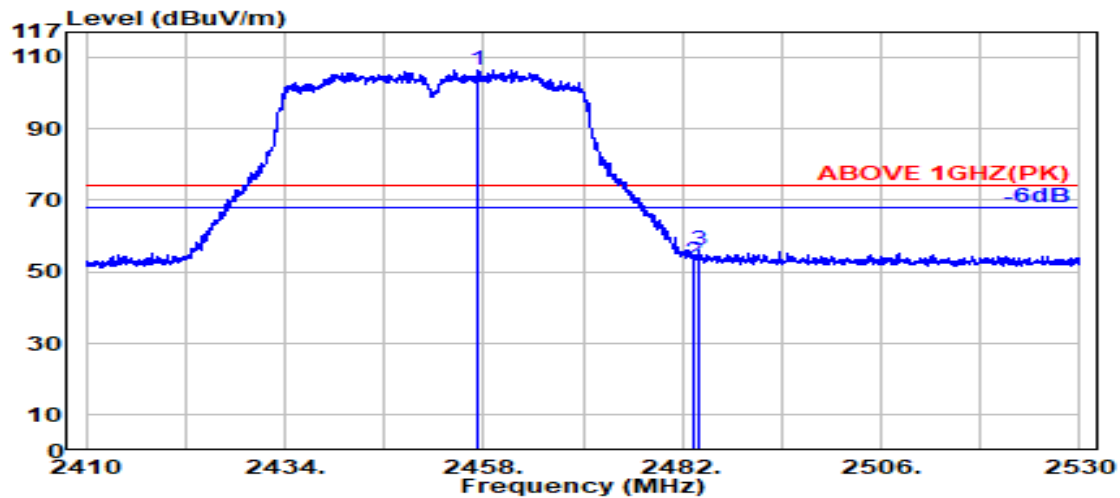

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.300	28.41	6.13	34.51	106.29	106.33	---	---	Peak
2483.500	28.47	6.17	34.52	52.95	53.07	74.00	20.93	Peak
2483.950	28.47	6.17	34.52	56.04	56.15	74.00	17.85	Peak

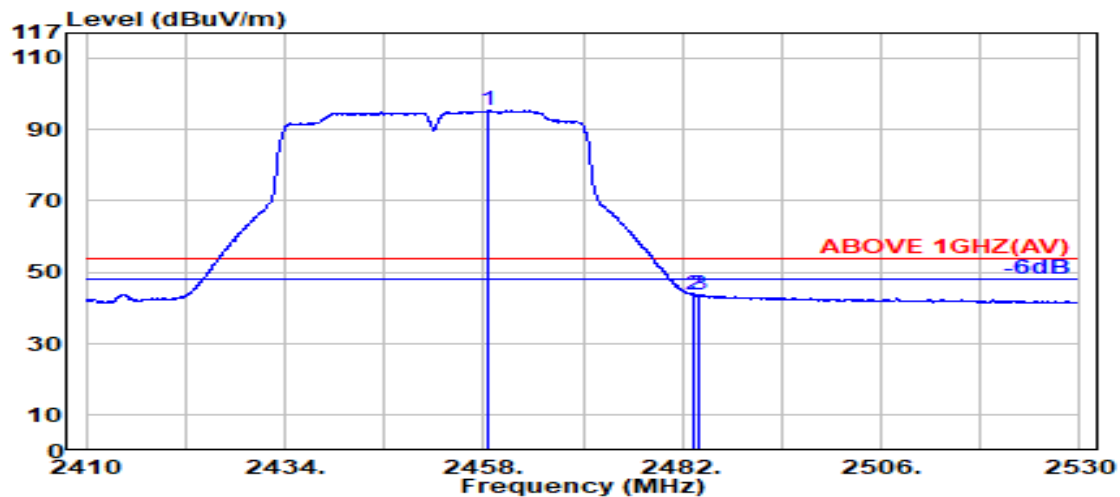

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.650	28.42	6.13	34.51	95.29	95.33	---	---	Average
2483.500	28.47	6.17	34.52	43.53	43.65	54.00	10.35	Average
2483.850	28.47	6.17	34.52	43.49	43.61	54.00	10.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

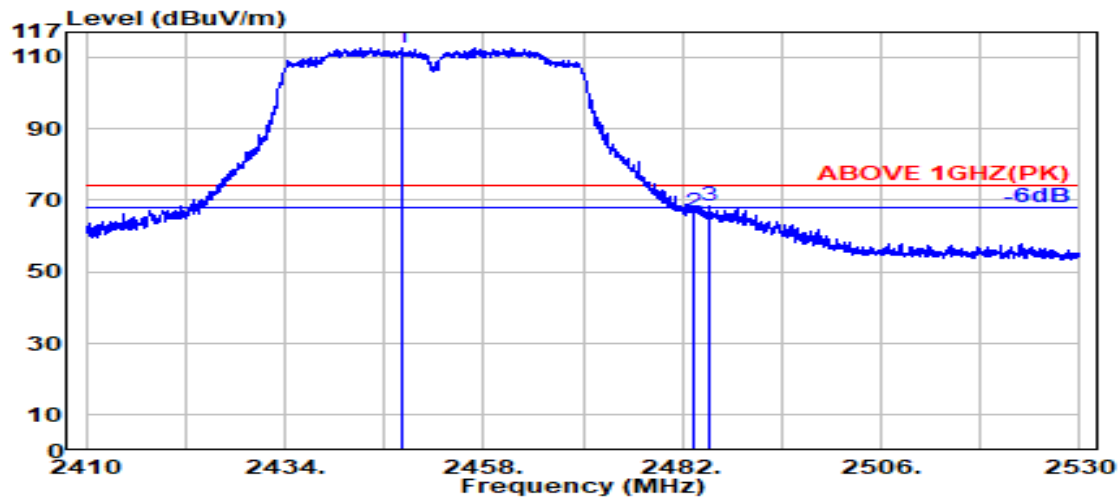

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.100	28.39	6.12	34.51	112.56	112.56	---	---	Peak
2483.500	28.47	6.17	34.52	66.45	66.57	74.00	7.43	Peak
2485.350	28.47	6.17	34.52	68.43	68.55	74.00	5.45	Peak

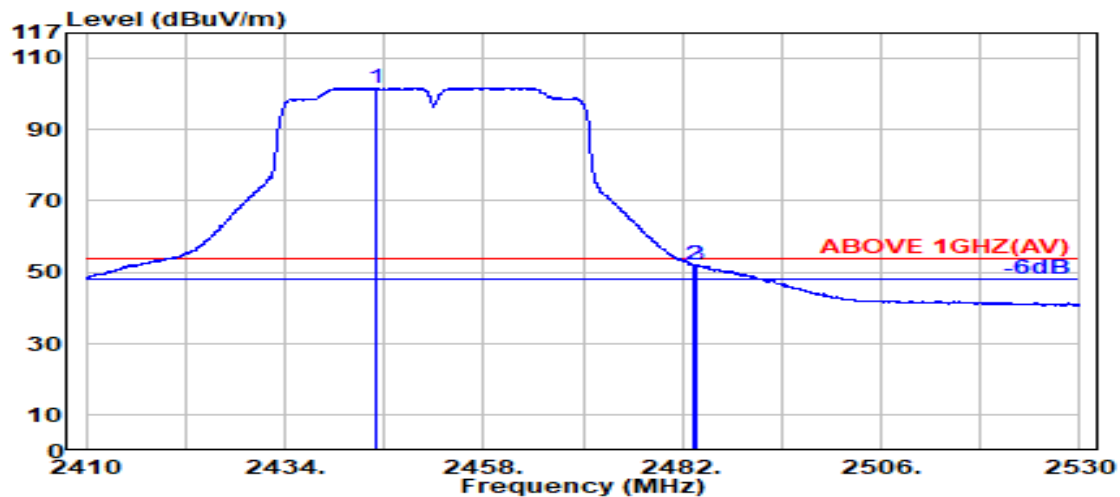

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.100	28.37	6.11	34.51	101.69	101.66	---	---	Average
2483.500	28.47	6.17	34.52	51.93	52.05	54.00	1.95	Average
2483.750	28.47	6.17	34.52	51.95	52.06	54.00	1.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

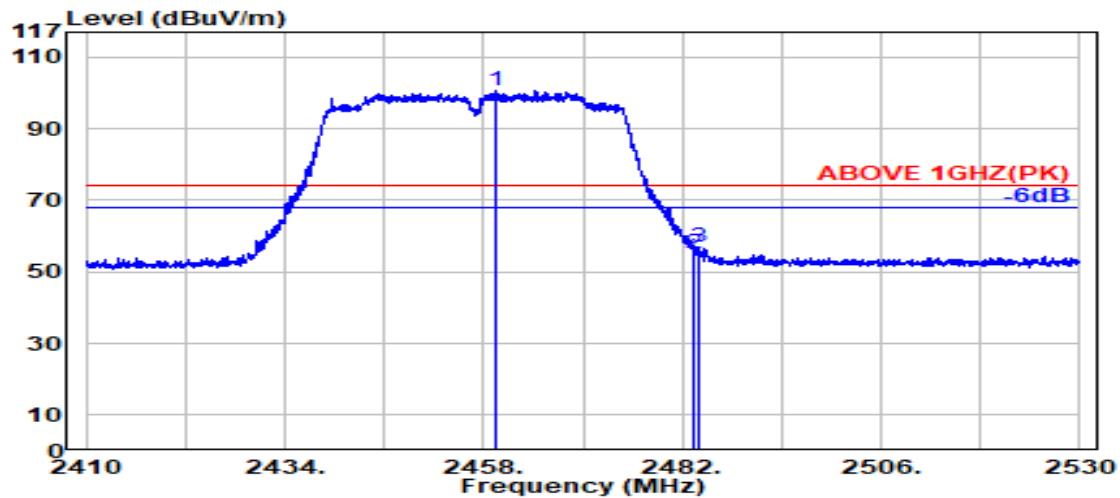

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.600	28.42	6.13	34.51	100.81	100.85	---	---	Peak
2483.500	28.47	6.17	34.52	54.95	55.06	74.00	18.94	Peak
2483.850	28.47	6.17	34.52	56.86	56.98	74.00	17.02	Peak

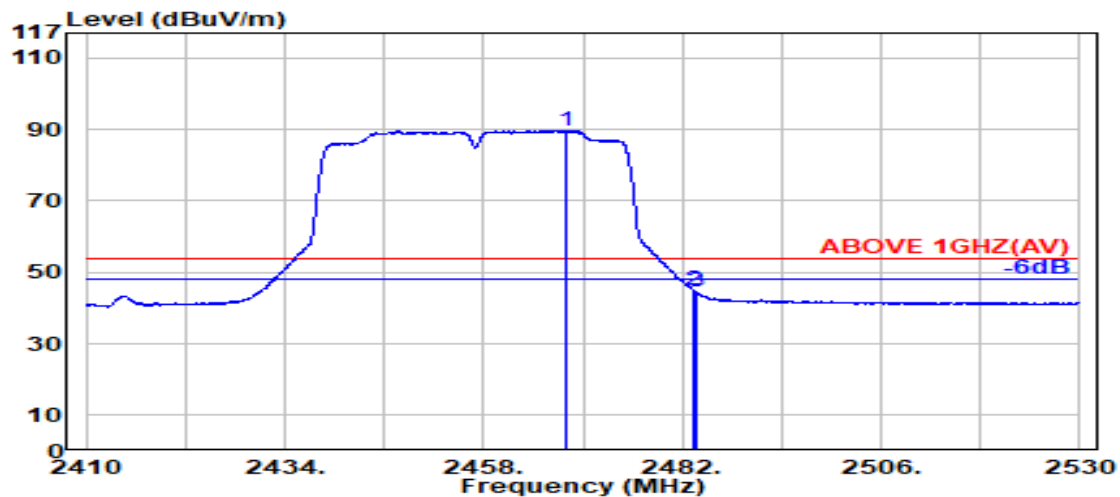

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.44	6.15	34.51	89.70	89.77	---	---	Average
2483.500	28.47	6.17	34.52	44.72	44.84	54.00	9.16	Average
2483.700	28.47	6.17	34.52	44.54	44.65	54.00	9.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

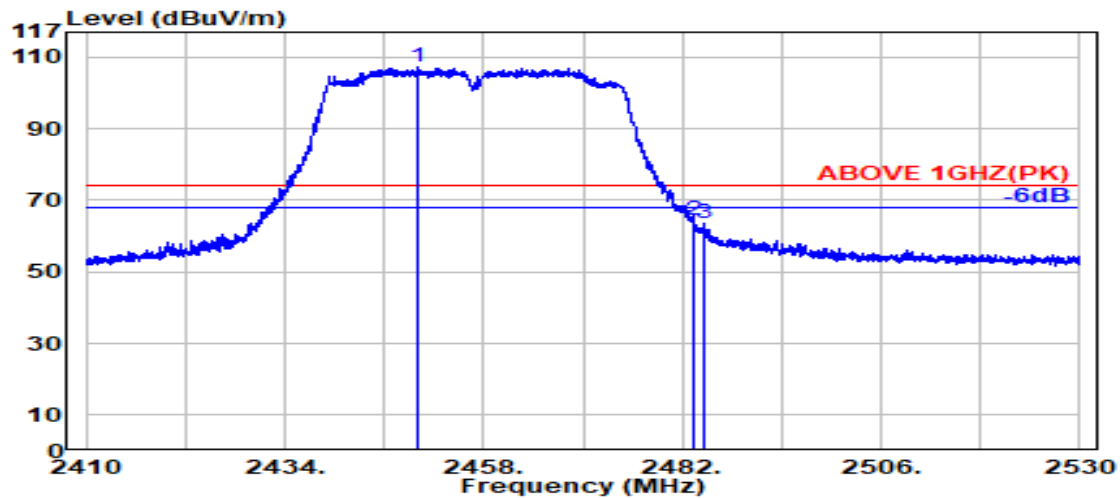

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.000	28.40	6.12	34.51	107.33	107.34	---	---	Peak
2483.500	28.47	6.17	34.52	64.35	64.47	74.00	9.53	Peak
2484.550	28.47	6.17	34.52	63.39	63.51	74.00	10.49	Peak

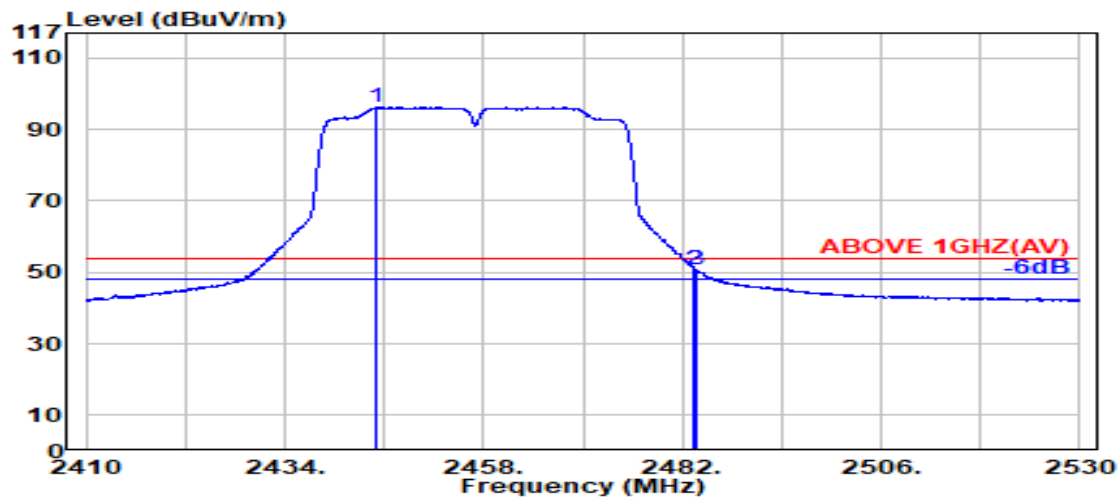

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.950	28.37	6.11	34.51	96.26	96.24	---	---	Average
2483.500	28.47	6.17	34.52	50.83	50.95	54.00	3.05	Average
2483.700	28.47	6.17	34.52	50.46	50.57	54.00	3.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

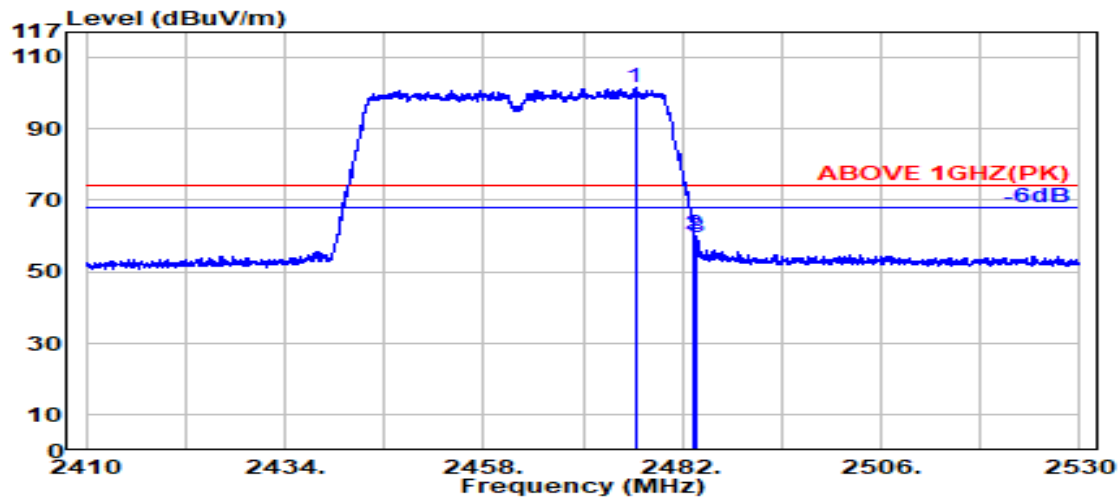

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.300	28.45	6.16	34.52	101.56	101.65	---	---	Peak
2483.500	28.47	6.17	34.52	60.26	60.38	74.00	13.62	Peak
2483.800	28.47	6.17	34.52	59.66	59.78	74.00	14.22	Peak

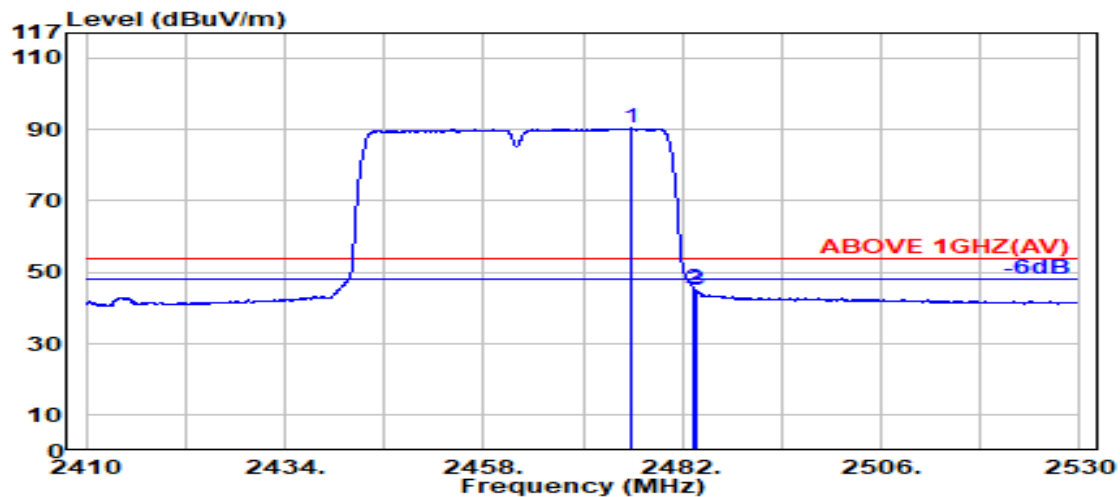

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.900	28.45	6.16	34.52	90.21	90.31	---	---	Average
2483.500	28.47	6.17	34.52	45.15	45.27	54.00	8.73	Average
2483.700	28.47	6.17	34.52	44.85	44.97	54.00	9.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

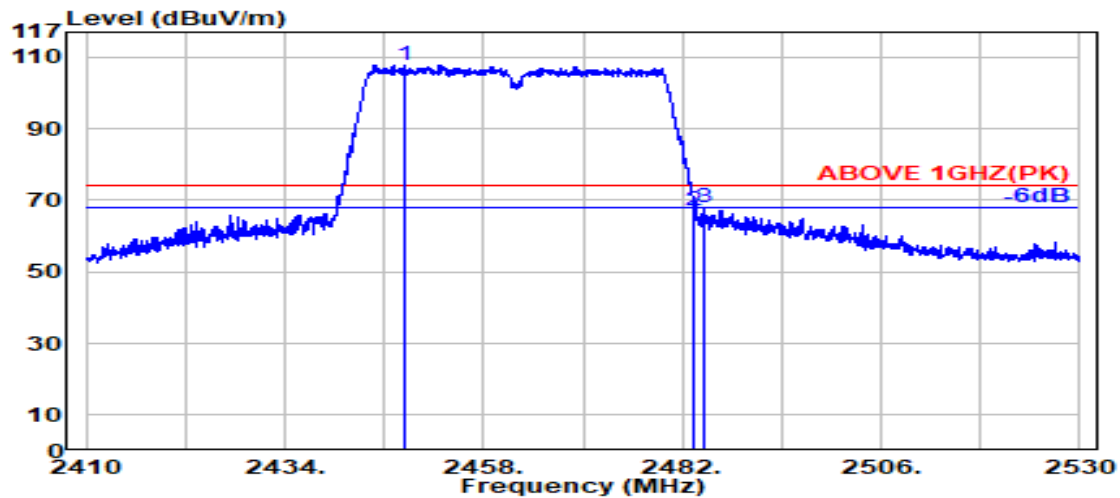

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.450	28.39	6.12	34.51	107.89	107.89	---	---	Peak
2483.500	28.47	6.17	34.52	67.21	67.33	74.00	6.67	Peak
2484.700	28.47	6.17	34.52	67.70	67.82	74.00	6.18	Peak

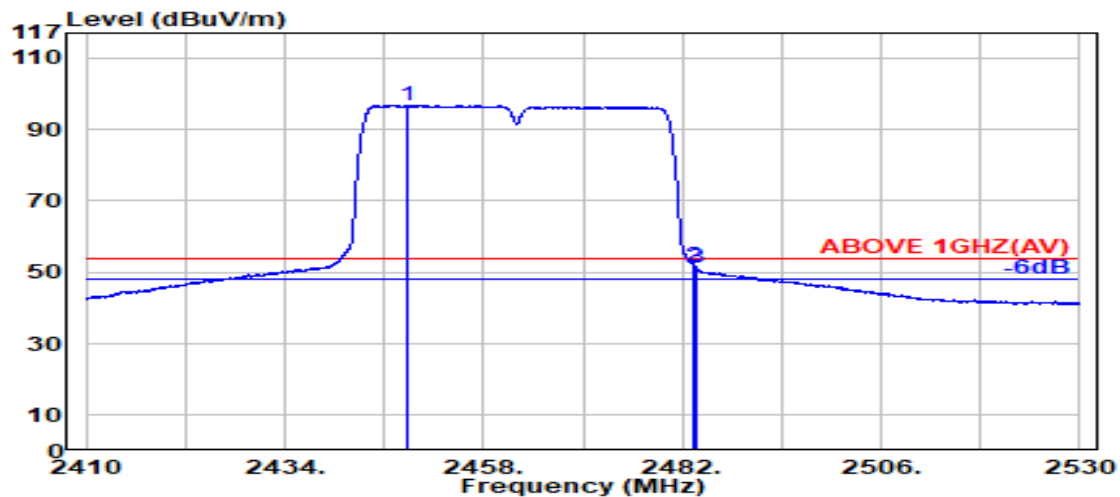

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.750	28.39	6.12	34.51	96.76	96.76	---	---	Average
2483.500	28.47	6.17	34.52	51.53	51.65	54.00	2.35	Average
2483.700	28.47	6.17	34.52	51.20	51.32	54.00	2.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

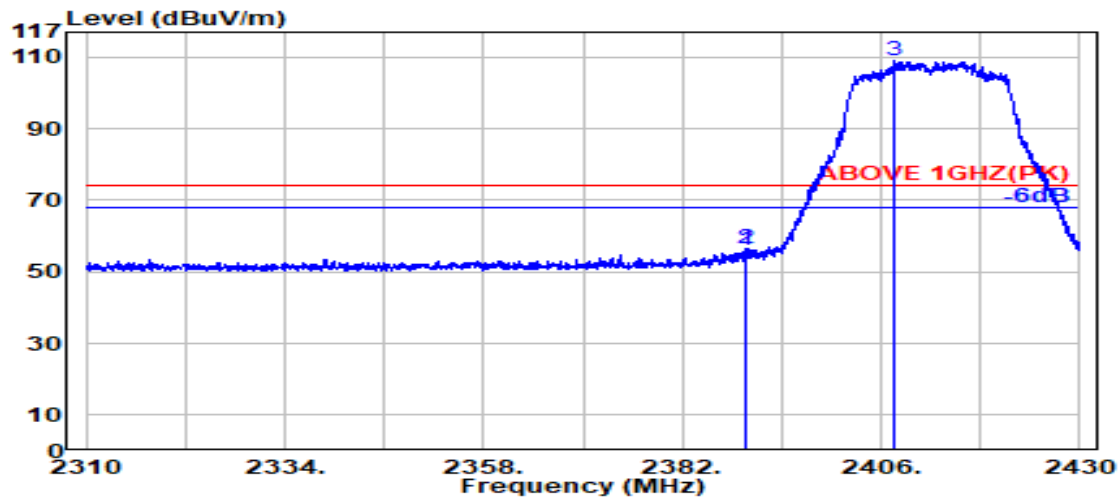

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	56.31	56.03	74.00	17.97	Peak
2389.800	28.18	6.03	34.50	56.96	56.68	74.00	17.32	Peak
@ 2407.700	28.15	6.06	34.50	109.37	109.08	---	---	Peak

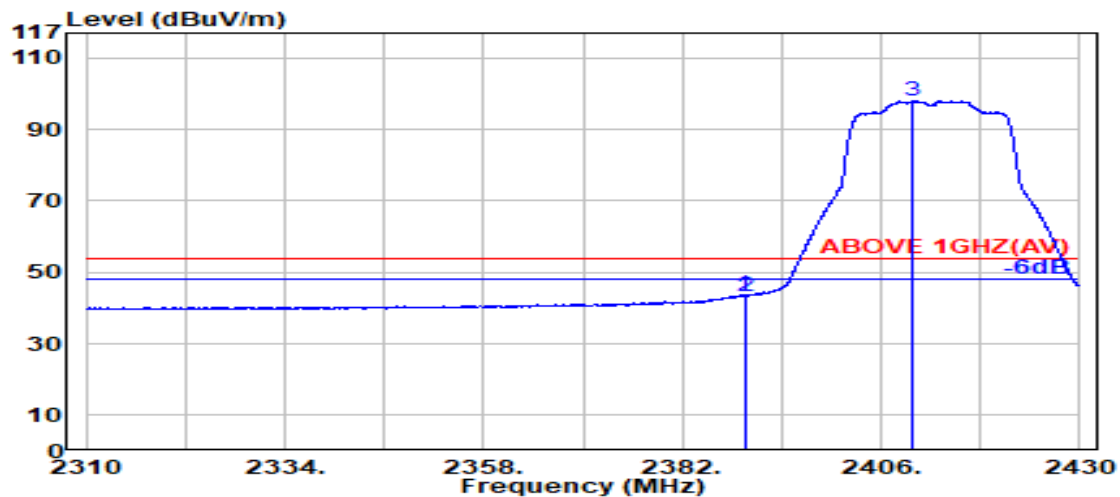

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	44.00	43.72	54.00	10.28	Average
2389.800	28.18	6.03	34.50	43.61	43.33	54.00	10.67	Average
@ 2409.850	28.16	6.06	34.50	98.26	97.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

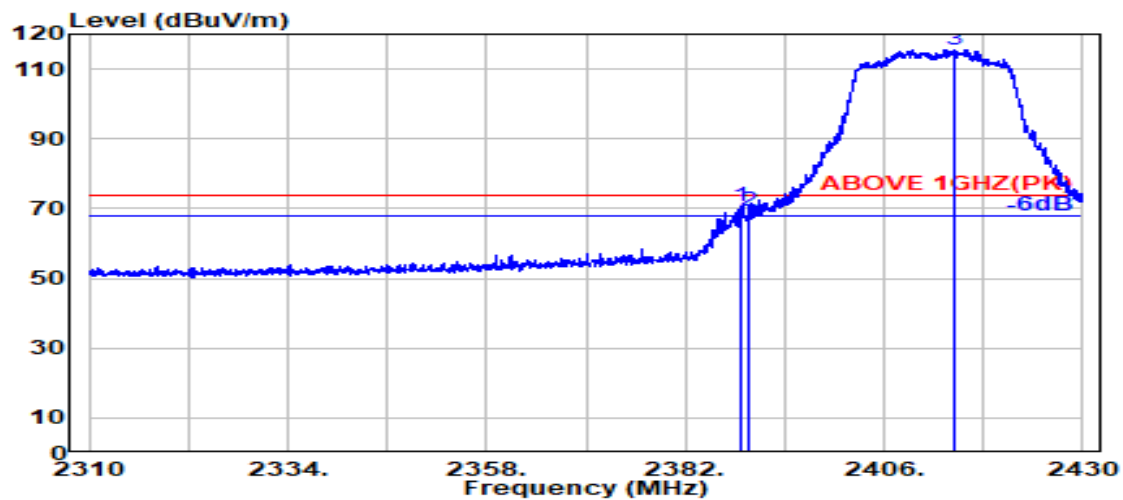

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.850	28.19	6.03	34.50	71.07	70.80	74.00	3.20	Peak
2389.800	28.18	6.03	34.50	69.45	69.16	74.00	4.84	Peak
@ 2414.550	28.19	6.07	34.50	115.89	115.64	---	---	Peak

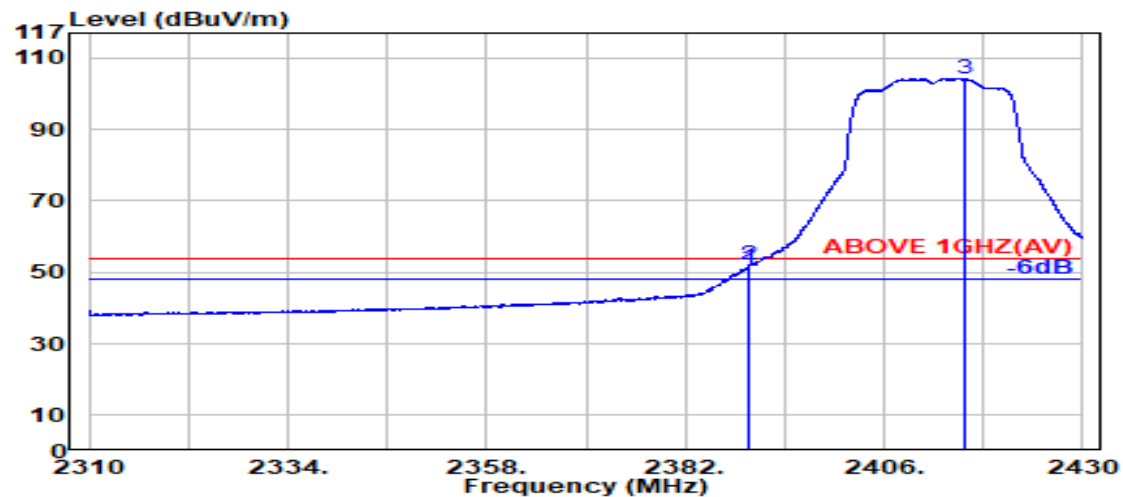

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	51.45	51.17	54.00	2.83	Average
2389.800	28.18	6.03	34.50	52.37	52.08	54.00	1.92	Average
@ 2415.800	28.20	6.07	34.50	104.52	104.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

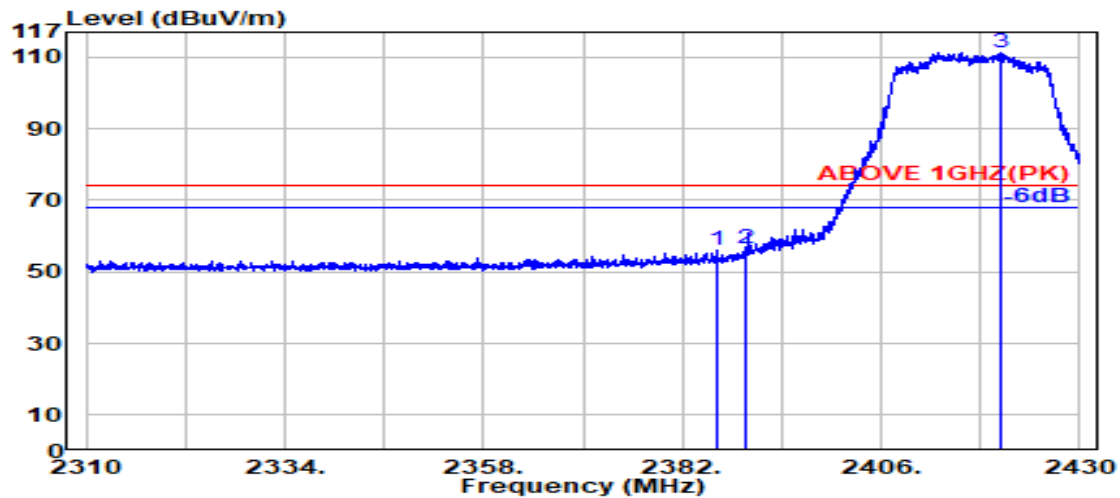

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.250	28.21	6.03	34.50	56.42	56.16	74.00	17.84	Peak
2389.800	28.18	6.03	34.50	56.90	56.62	74.00	17.38	Peak
@ 2420.550	28.22	6.08	34.50	111.62	111.42	---	---	Peak

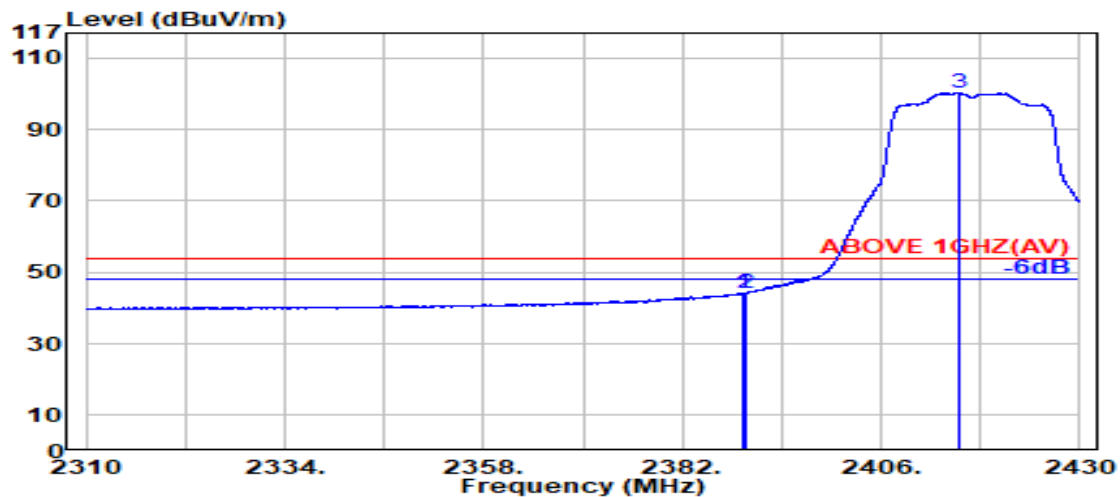

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	44.61	44.33	54.00	9.67	Average
2389.800	28.18	6.03	34.50	44.53	44.25	54.00	9.75	Average
@ 2415.300	28.19	6.07	34.50	100.42	100.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

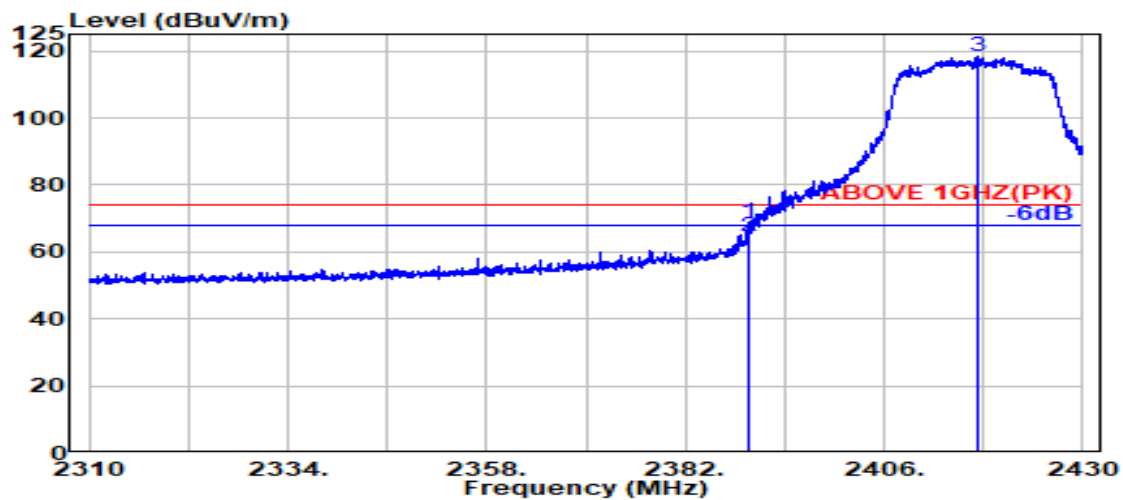

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	69.09	68.81	74.00	5.19	Peak
2389.800	28.18	6.03	34.50	64.80	64.52	74.00	9.48	Peak
@ 2417.200	28.20	6.07	34.50	118.43	118.21	---	---	Peak

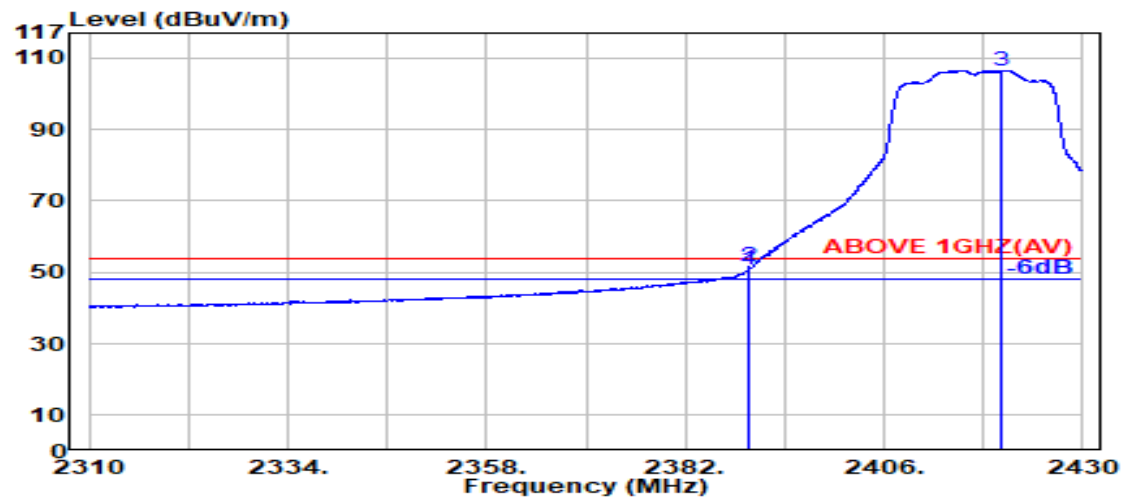


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	51.13	50.85	54.00	3.15	Average
2389.800	28.18	6.03	34.50	51.73	51.45	54.00	2.55	Average
@ 2420.150	28.22	6.08	34.50	106.80	106.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

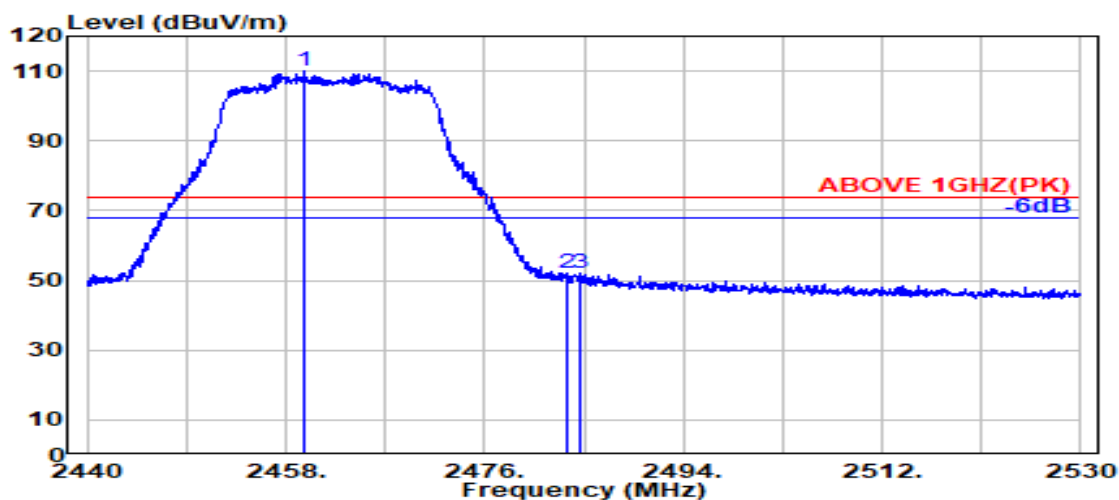

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.550	28.42	6.13	34.51	109.86	109.90	---	---	Peak
	2483.500	28.47	6.17	34.52	51.74	51.86	74.00	22.14	Peak
	2484.650	28.47	6.17	34.52	51.78	51.91	74.00	22.09	Peak

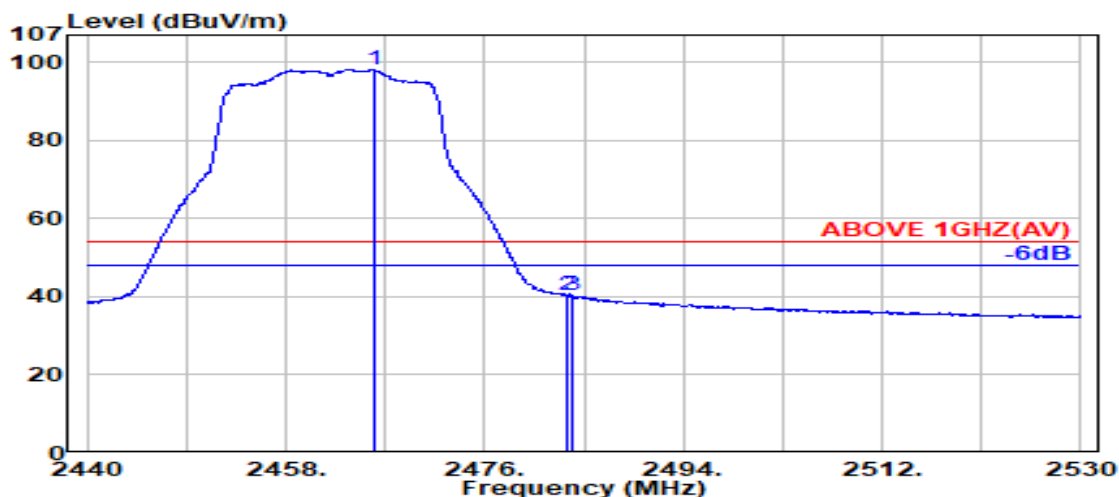

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.950	28.43	6.14	34.51	98.25	98.31	---	---	Average
	2483.500	28.47	6.17	34.52	40.40	40.51	54.00	13.49	Average
	2484.000	28.47	6.17	34.52	40.27	40.39	54.00	13.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

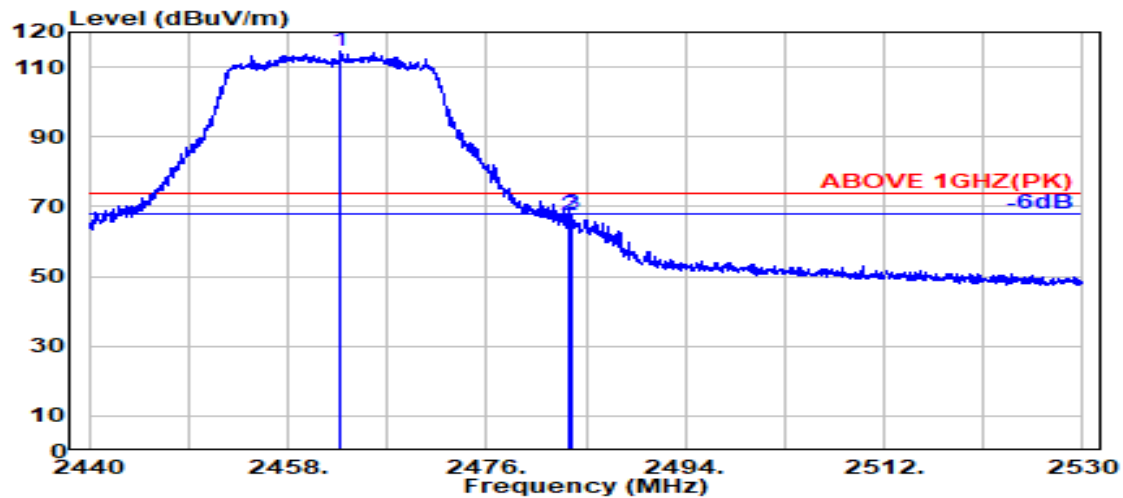

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	28.43	6.14	34.51	114.32	114.37	---	---	Peak
2483.500	28.47	6.17	34.52	67.15	67.27	74.00	6.73	Peak
2483.700	28.47	6.17	34.52	67.79	67.91	74.00	6.09	Peak

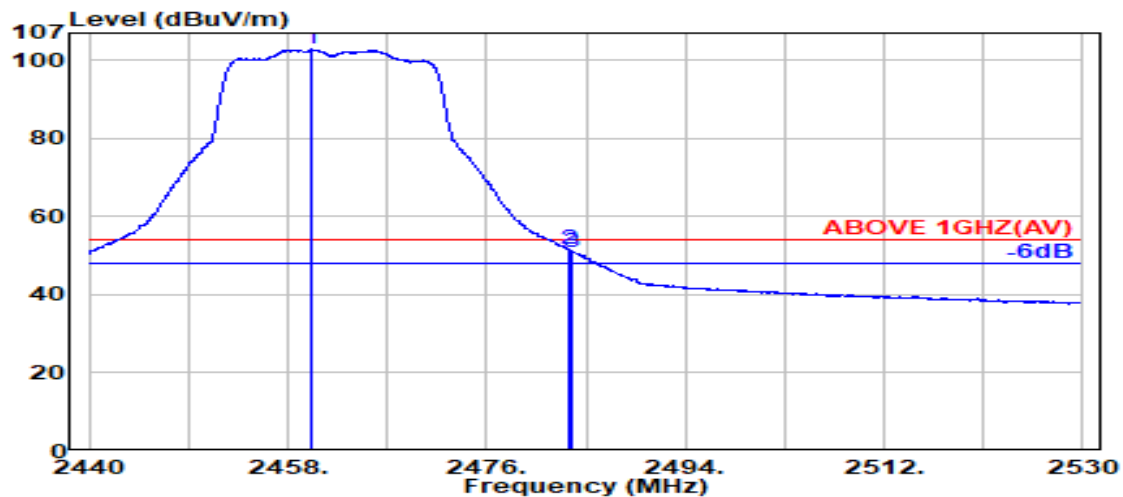

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.42	6.13	34.51	102.76	102.80	---	---	Average
2483.500	28.47	6.17	34.52	51.37	51.48	54.00	2.52	Average
2483.750	28.47	6.17	34.52	50.93	51.05	54.00	2.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

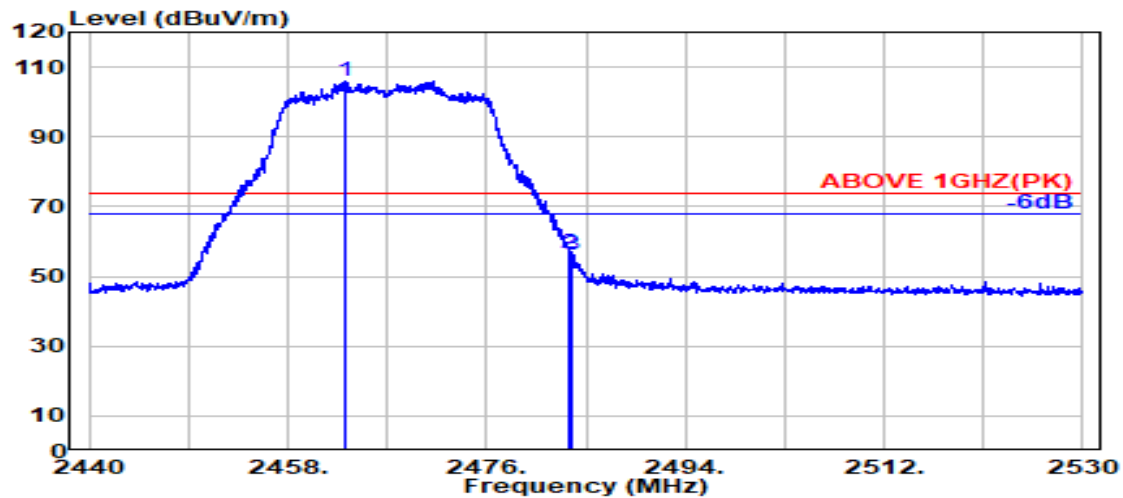

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.43	6.14	34.51	105.92	105.98	---	---	Peak
2483.500	28.47	6.17	34.52	56.62	56.74	74.00	17.26	Peak
2483.700	28.47	6.17	34.52	56.22	56.34	74.00	17.66	Peak

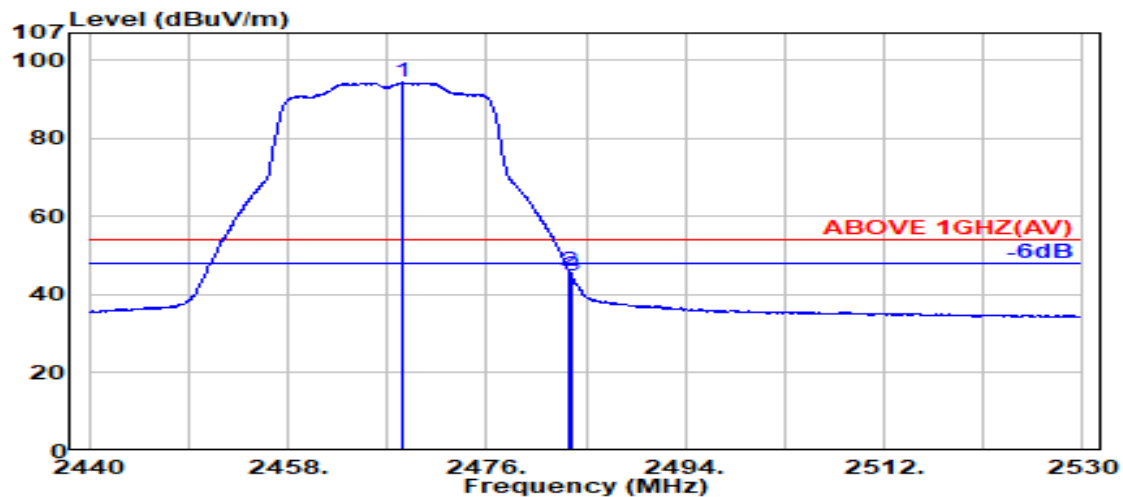

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.400	28.44	6.15	34.51	94.23	94.30	---	---	Average
2483.500	28.47	6.17	34.52	45.88	46.00	54.00	8.00	Average
2483.700	28.47	6.17	34.52	44.71	44.83	54.00	9.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

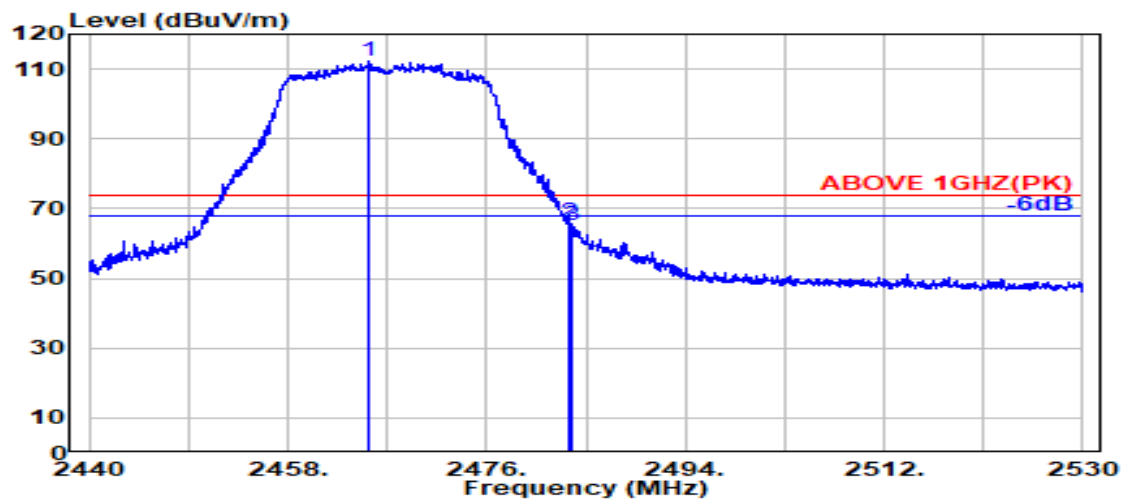

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.300	28.43	6.14	34.51	112.39	112.45	---	---	Peak
2483.500	28.47	6.17	34.52	66.07	66.19	74.00	7.81	Peak
2483.750	28.47	6.17	34.52	65.00	65.12	74.00	8.88	Peak

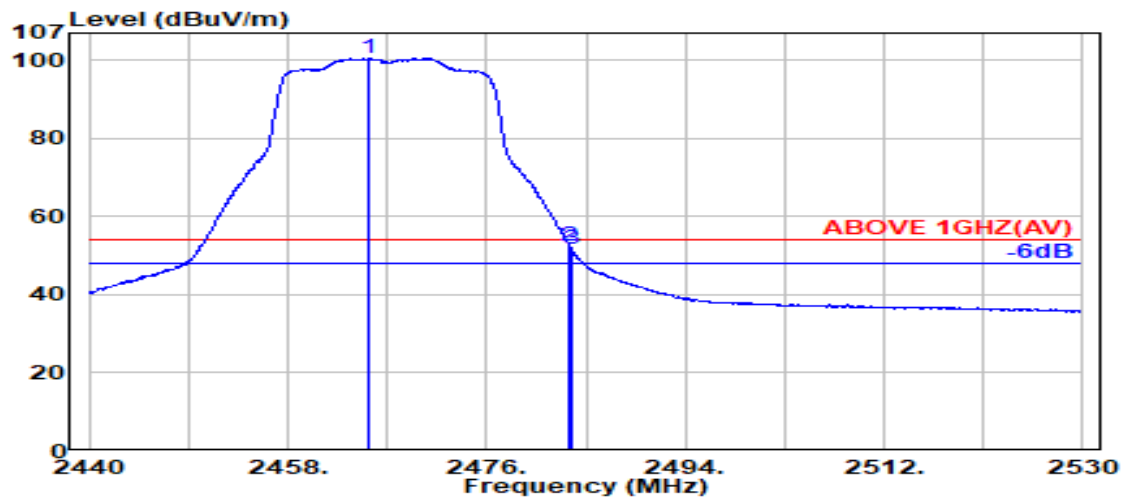


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	34.51	100.43	100.49	---	---	Average
2483.500	28.47	6.17	34.52	52.34	52.46	54.00	1.54	Average
2483.700	28.47	6.17	34.52	51.38	51.50	54.00	2.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

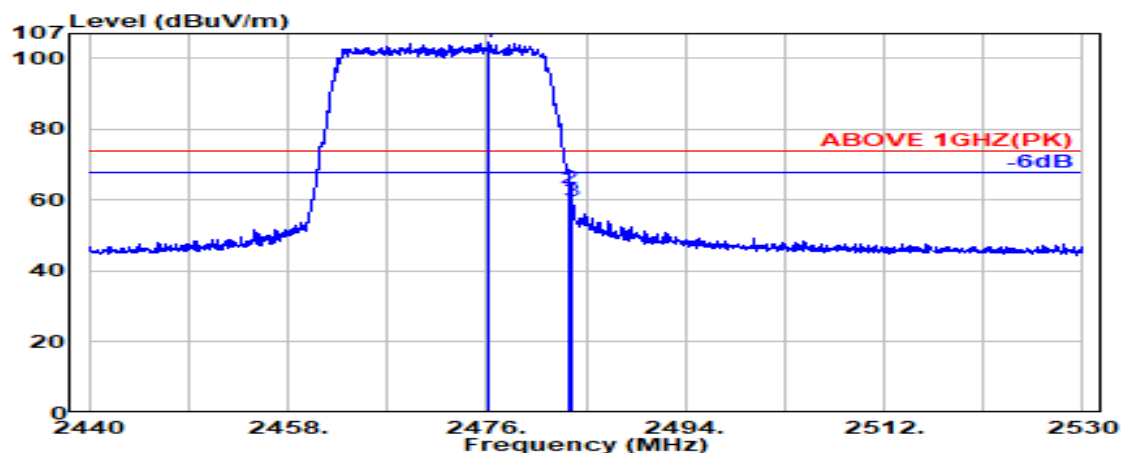

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.250	28.45	6.16	34.52	104.33	104.42	---	---	Peak
2483.500	28.47	6.17	34.52	63.21	63.33	74.00	10.67	Peak
2483.750	28.47	6.17	34.52	59.59	59.71	74.00	14.29	Peak

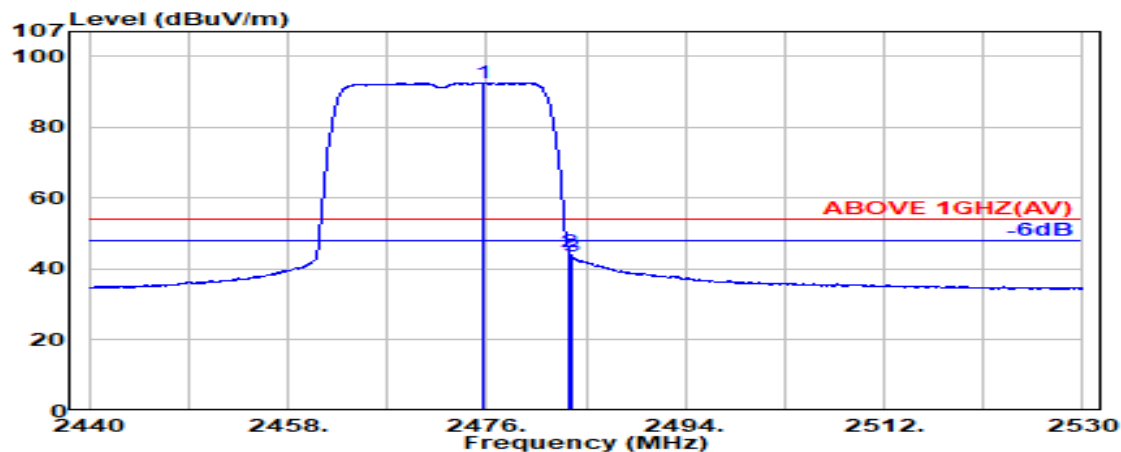

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.750	28.45	6.16	34.52	92.53	92.62	---	---	Average
2483.500	28.47	6.17	34.52	44.62	44.74	54.00	9.26	Average
2483.700	28.47	6.17	34.52	43.64	43.76	54.00	10.24	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

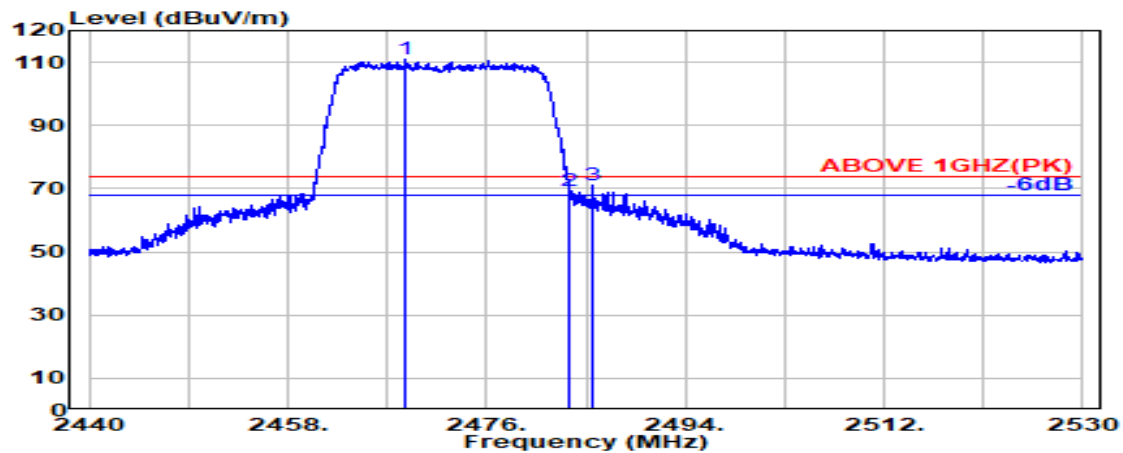

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.550	28.44	6.15	34.51	110.67	110.74	---	---	Peak
2483.500	28.47	6.17	34.52	69.27	69.39	74.00	4.61	Peak
2485.650	28.47	6.17	34.52	71.15	71.28	74.00	2.72	Peak

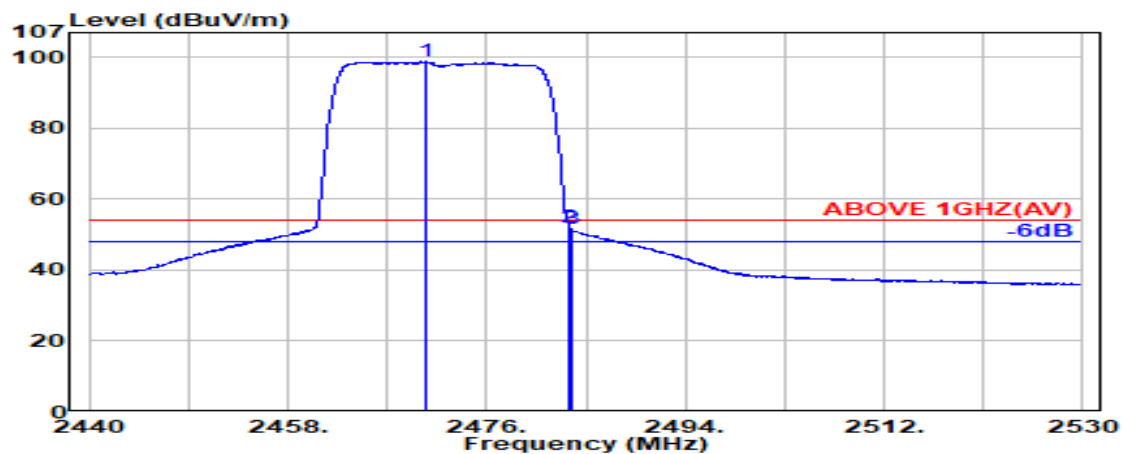

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.550	28.44	6.15	34.51	98.71	98.79	---	---	Average
2483.500	28.47	6.17	34.52	52.01	52.13	54.00	1.87	Average
2483.700	28.47	6.17	34.52	51.54	51.66	54.00	2.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

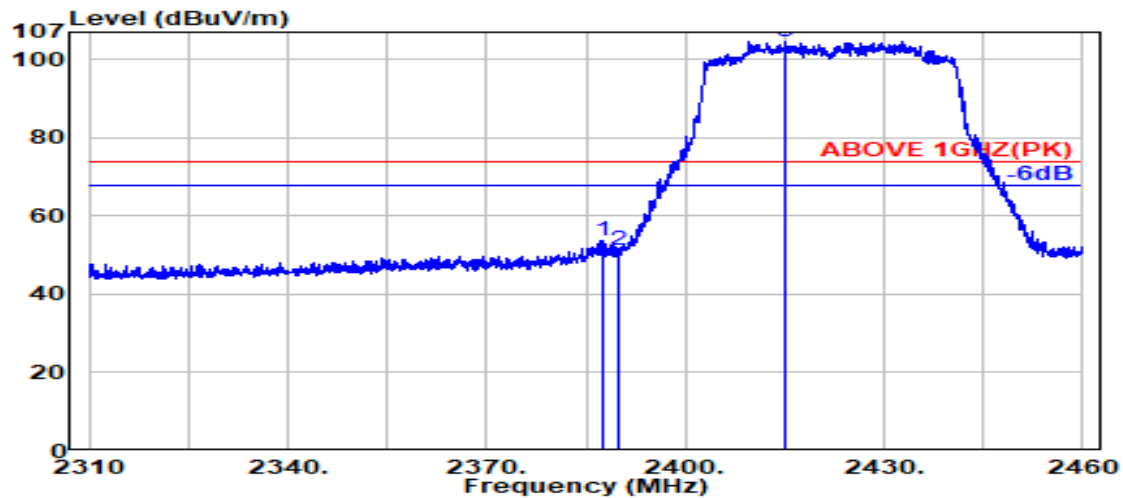

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.20	6.03	34.50	53.97	53.70	74.00	20.30	Peak
2389.800	28.18	6.03	34.50	51.61	51.32	74.00	22.68	Peak
@ 2415.100	28.19	6.07	34.50	104.97	104.73	---	---	Peak

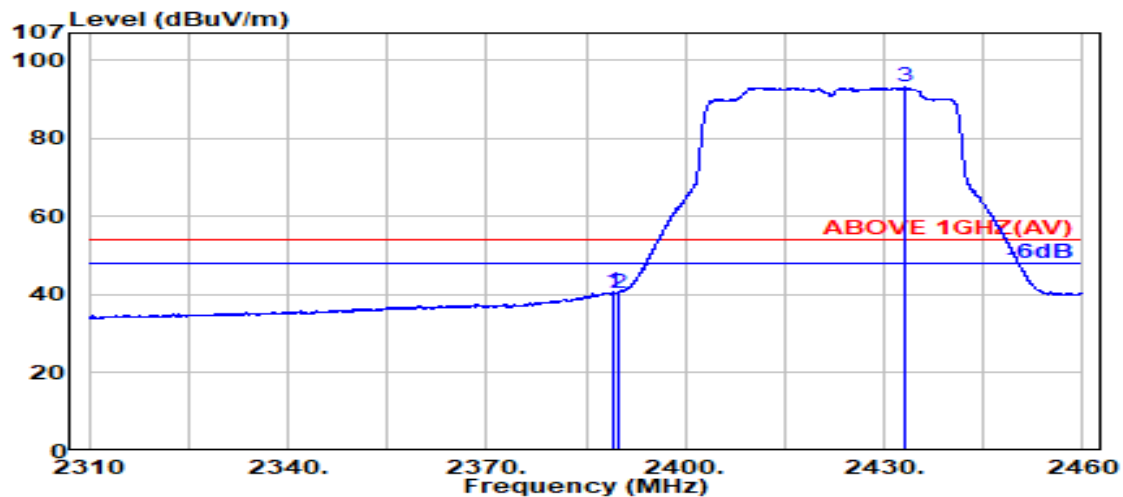

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	40.92	40.64	54.00	13.36	Average
2389.800	28.18	6.03	34.50	40.82	40.54	54.00	13.46	Average
@ 2433.050	28.30	6.10	34.51	93.24	93.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

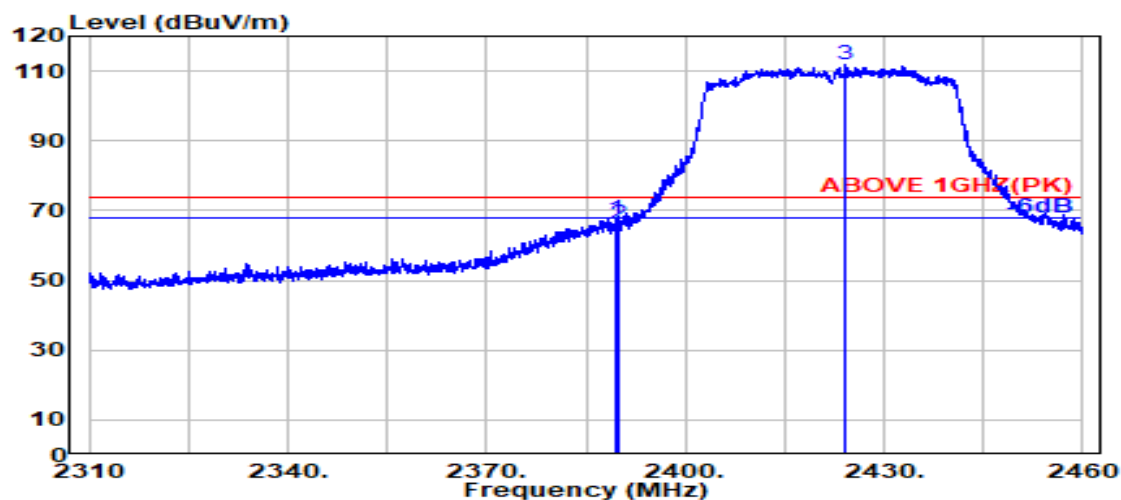

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	67.71	67.43	74.00	6.57	Peak
2389.800	28.18	6.03	34.50	66.21	65.93	74.00	8.07	Peak
@ 2424.200	28.25	6.08	34.50	112.07	111.90	---	---	Peak

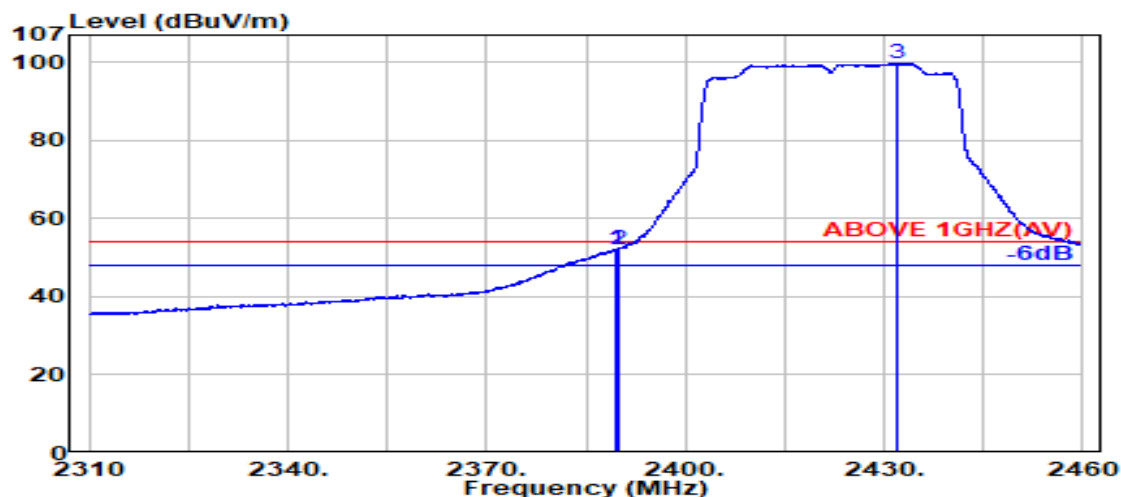

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	52.57	52.29	54.00	1.71	Average
2389.800	28.18	6.03	34.50	52.45	52.17	54.00	1.83	Average
@ 2432.100	28.29	6.09	34.51	99.82	99.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

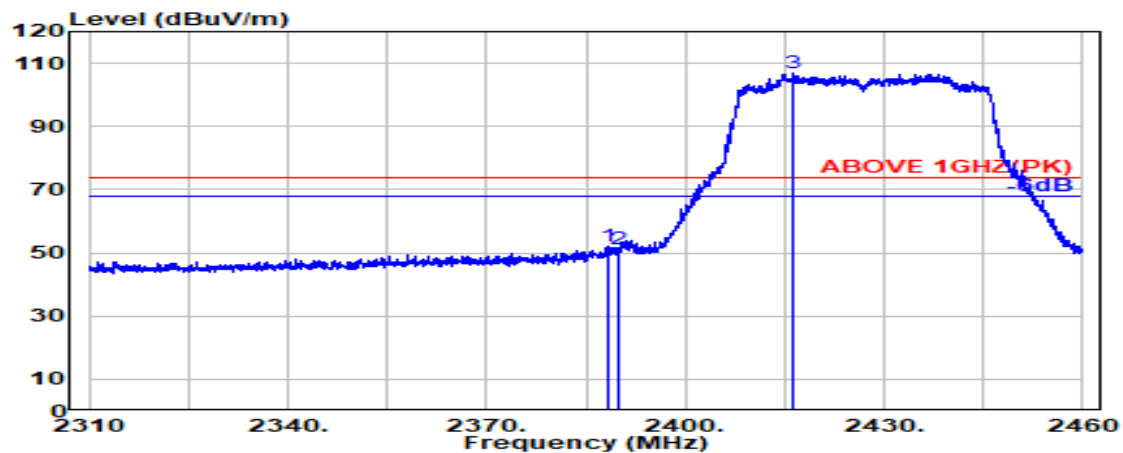

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.350	28.19	6.03	34.50	52.47	52.20	74.00	21.80	Peak
2389.800	28.18	6.03	34.50	51.65	51.37	74.00	22.63	Peak
@ 2416.250	28.20	6.07	34.50	107.14	106.91	---	---	Peak

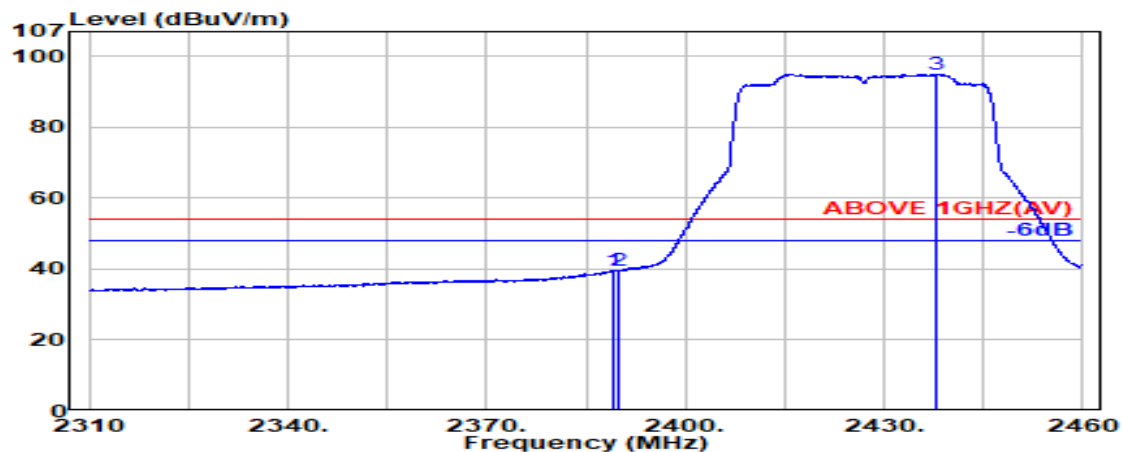

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.050	28.19	6.03	34.50	39.95	39.67	54.00	14.33	Average
2389.800	28.18	6.03	34.50	39.82	39.54	54.00	14.46	Average
@ 2437.850	28.33	6.10	34.51	95.14	95.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

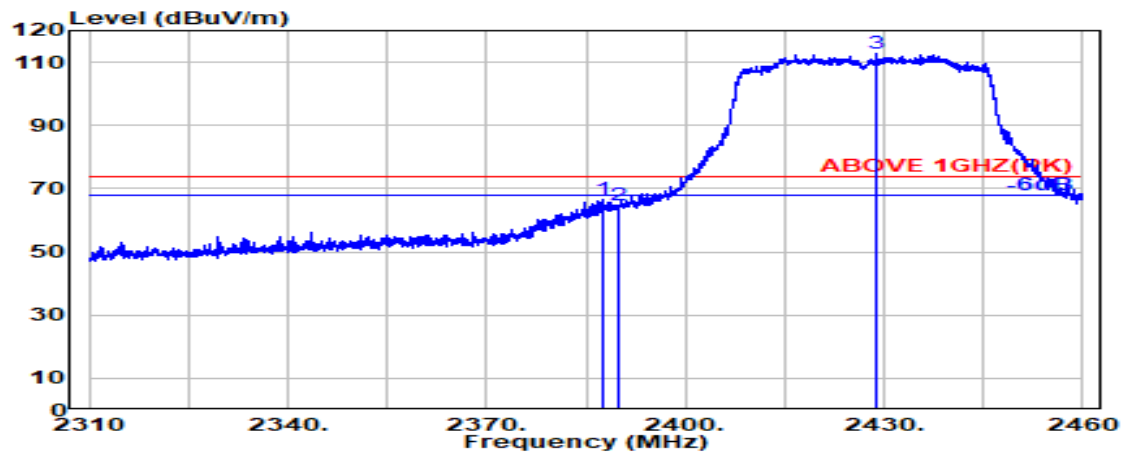

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	28.20	6.03	34.50	66.79	66.52	74.00	7.48	Peak
2389.800	28.18	6.03	34.50	65.15	64.87	74.00	9.13	Peak
@ 2428.750	28.27	6.09	34.51	113.12	112.98	---	---	Peak

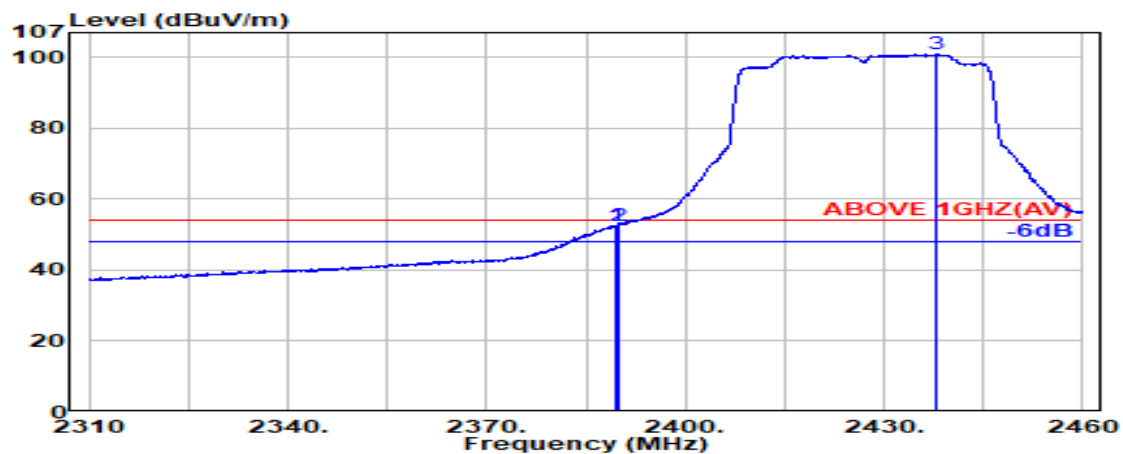

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	52.75	52.47	54.00	1.53	Average
2389.800	28.18	6.03	34.50	52.68	52.40	54.00	1.60	Average
@ 2437.950	28.33	6.10	34.51	100.94	100.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

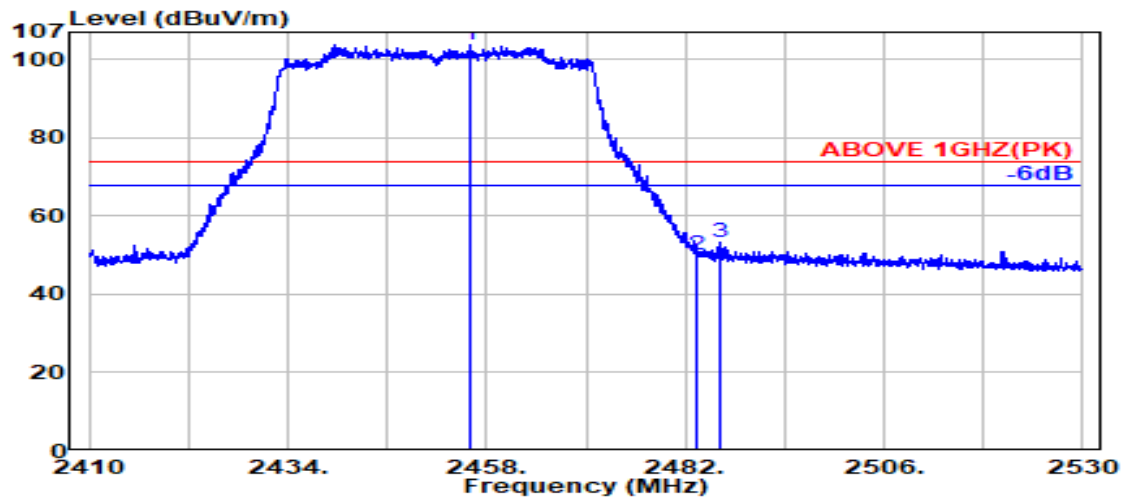

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.150	28.41	6.13	34.51	103.80	103.83	---	---	Peak
2483.500	28.47	6.17	34.52	50.13	50.25	74.00	23.75	Peak
2486.050	28.47	6.17	34.52	53.36	53.48	74.00	20.52	Peak

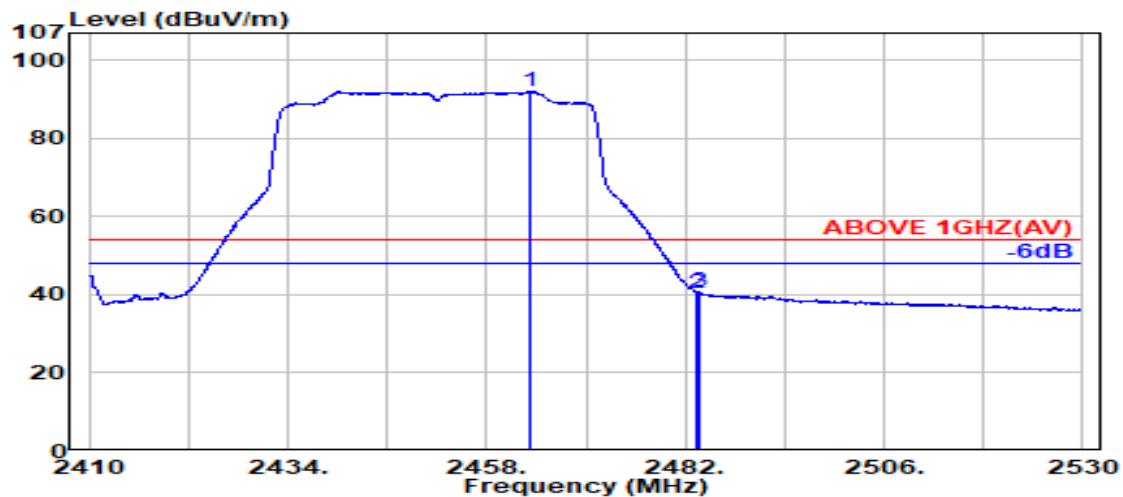

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.200	28.43	6.14	34.51	91.96	92.01	---	---	Average
2483.500	28.47	6.17	34.52	40.41	40.53	54.00	13.47	Average
2483.700	28.47	6.17	34.52	40.64	40.76	54.00	13.24	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

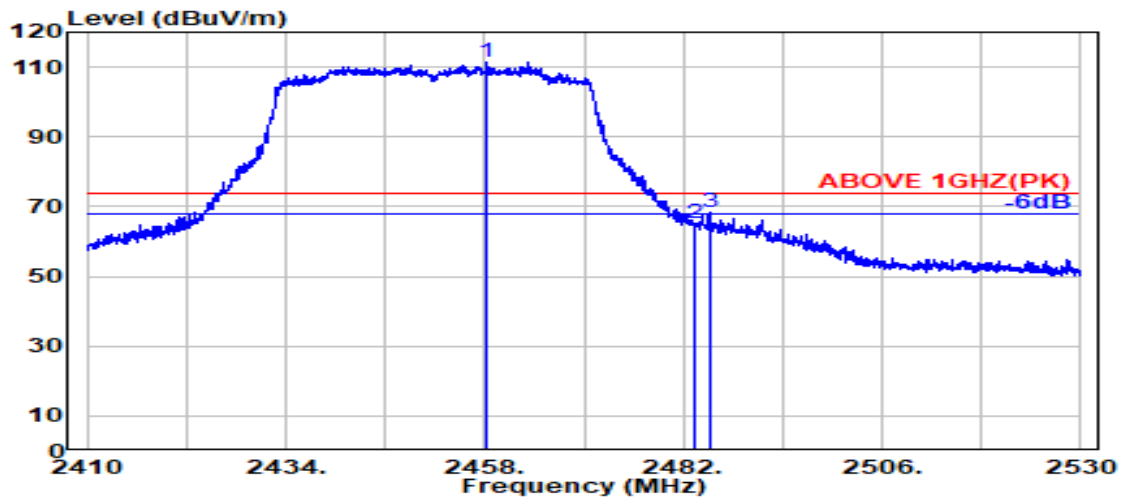

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.350	28.42	6.13	34.51	111.53	111.57	---	---	Peak
2483.500	28.47	6.17	34.52	64.98	65.10	74.00	8.90	Peak
2485.250	28.47	6.17	34.52	68.46	68.59	74.00	5.41	Peak

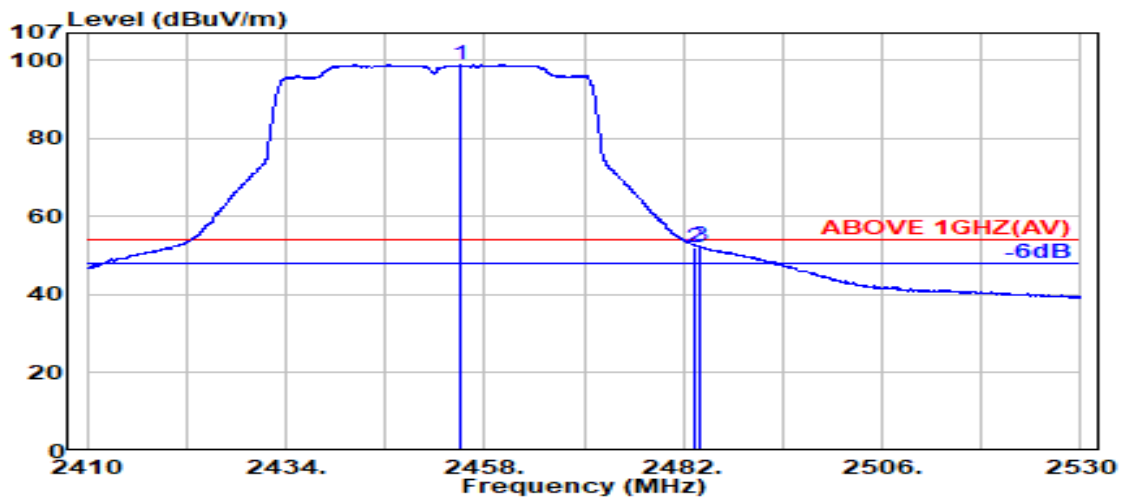

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.150	28.41	6.13	34.51	98.88	98.91	---	---	Average
2483.500	28.47	6.17	34.52	52.12	52.23	54.00	1.77	Average
2483.900	28.47	6.17	34.52	52.39	52.50	54.00	1.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

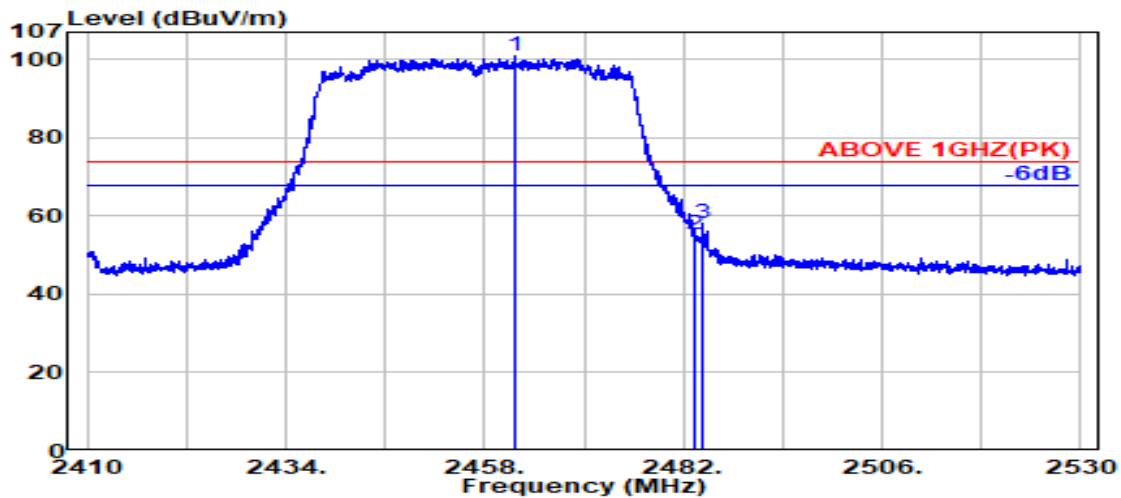

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.700	28.42	6.14	34.51	100.92	100.96	---	---	Peak
2483.500	28.47	6.17	34.52	55.05	55.17	74.00	18.83	Peak
2484.200	28.47	6.17	34.52	58.13	58.25	74.00	15.75	Peak

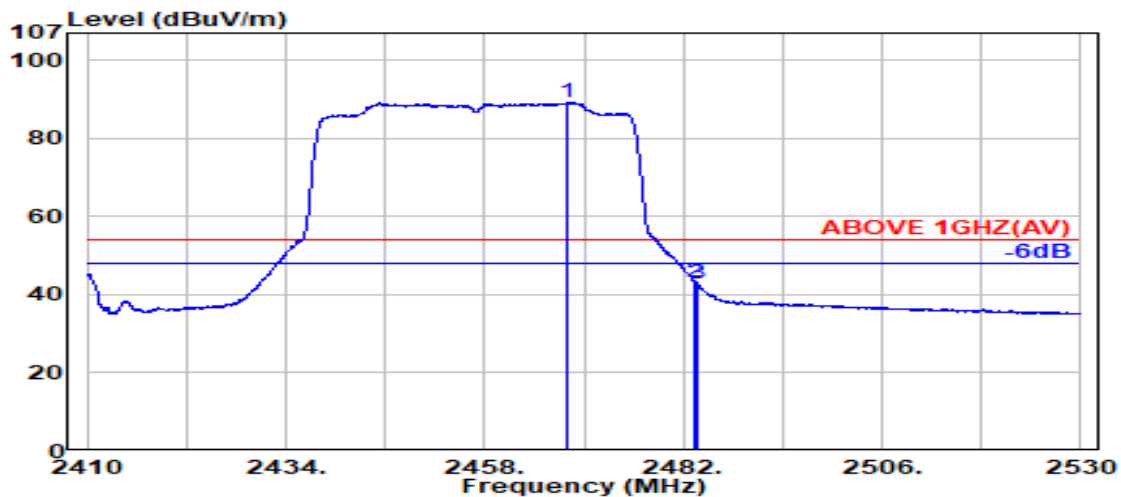

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.050	28.44	6.15	34.51	89.06	89.12	---	---	Average
2483.500	28.47	6.17	34.52	43.08	43.20	54.00	10.80	Average
2483.700	28.47	6.17	34.52	42.78	42.89	54.00	11.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

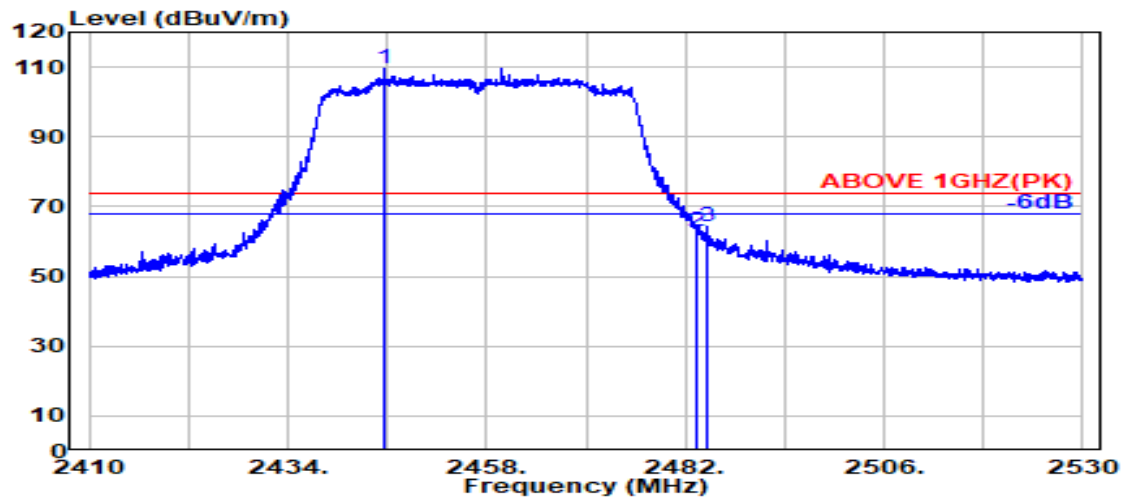

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.600	28.37	6.11	34.51	109.59	109.57	---	---	Peak
	2483.500	28.47	6.17	34.52	62.76	62.88	74.00	11.12	Peak
	2484.650	28.47	6.17	34.52	64.37	64.49	74.00	9.51	Peak

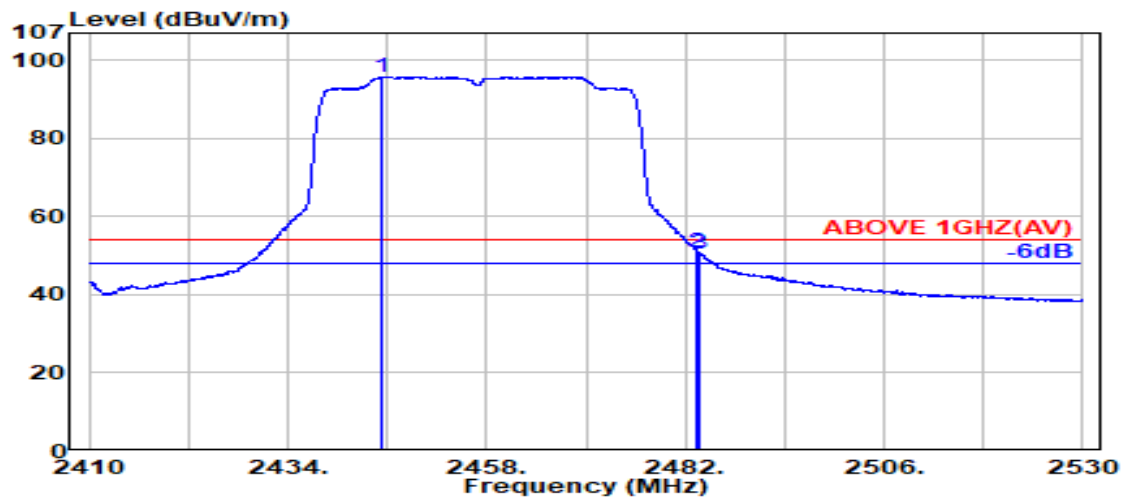

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.300	28.37	6.11	34.51	95.90	95.88	---	---	Average
	2483.500	28.47	6.17	34.52	50.81	50.93	54.00	3.07	Average
	2483.700	28.47	6.17	34.52	50.49	50.61	54.00	3.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

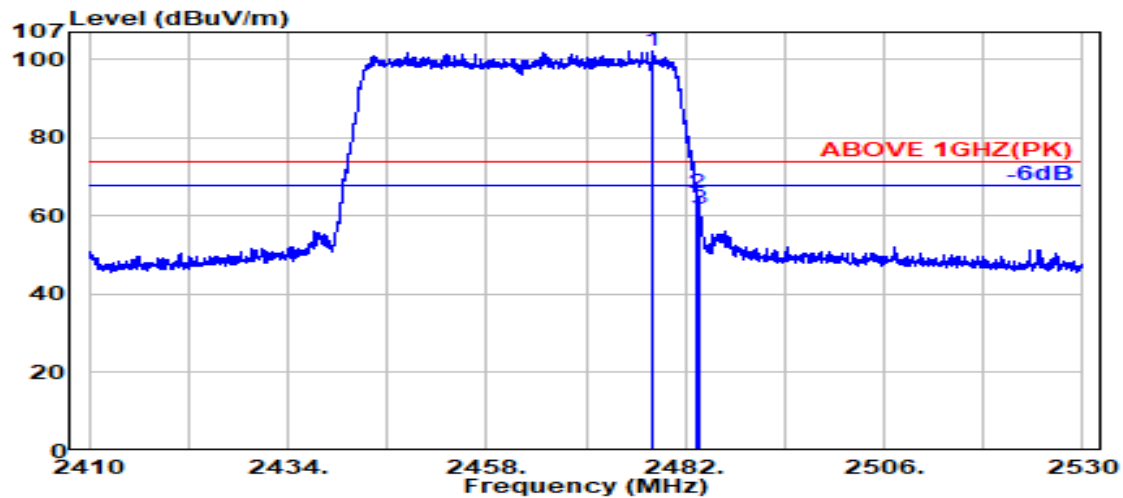

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.100	28.46	6.16	34.52	101.94	102.04	---	---	Peak
2483.500	28.47	6.17	34.52	65.57	65.69	74.00	8.31	Peak
2483.750	28.47	6.17	34.52	61.86	61.98	74.00	12.02	Peak

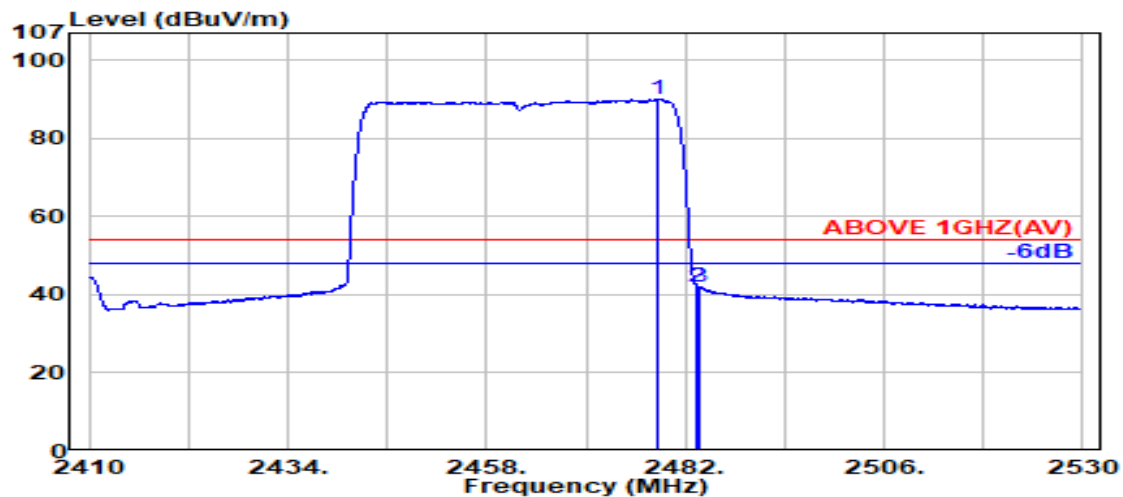

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.550	28.46	6.16	34.52	89.97	90.07	---	---	Average
2483.500	28.47	6.17	34.52	41.93	42.05	54.00	11.95	Average
2483.700	28.47	6.17	34.52	41.90	42.02	54.00	11.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

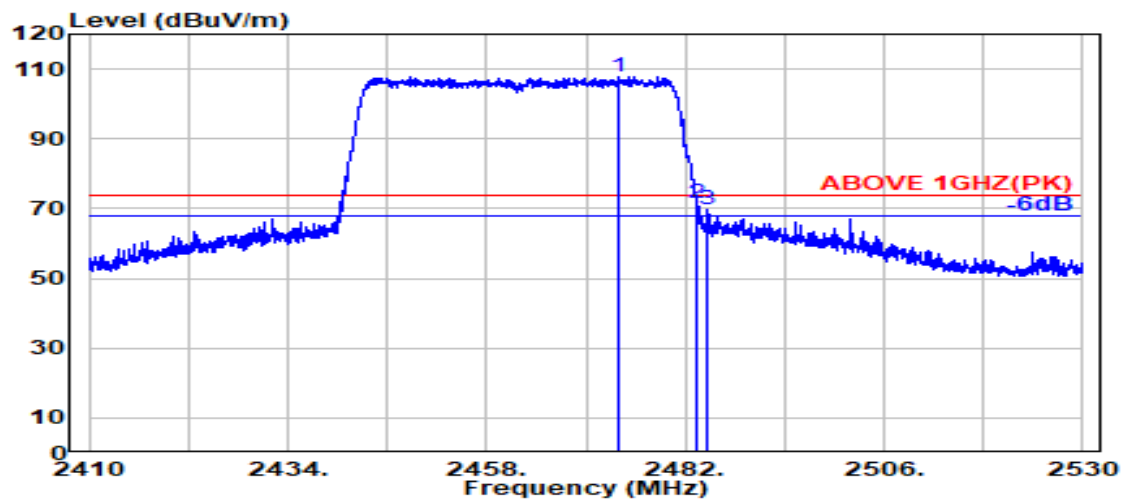

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.000	28.45	6.15	34.51	107.71	107.80	---	---	Peak
2483.500	28.47	6.17	34.52	71.34	71.46	74.00	2.54	Peak
2484.750	28.47	6.17	34.52	69.79	69.91	74.00	4.09	Peak

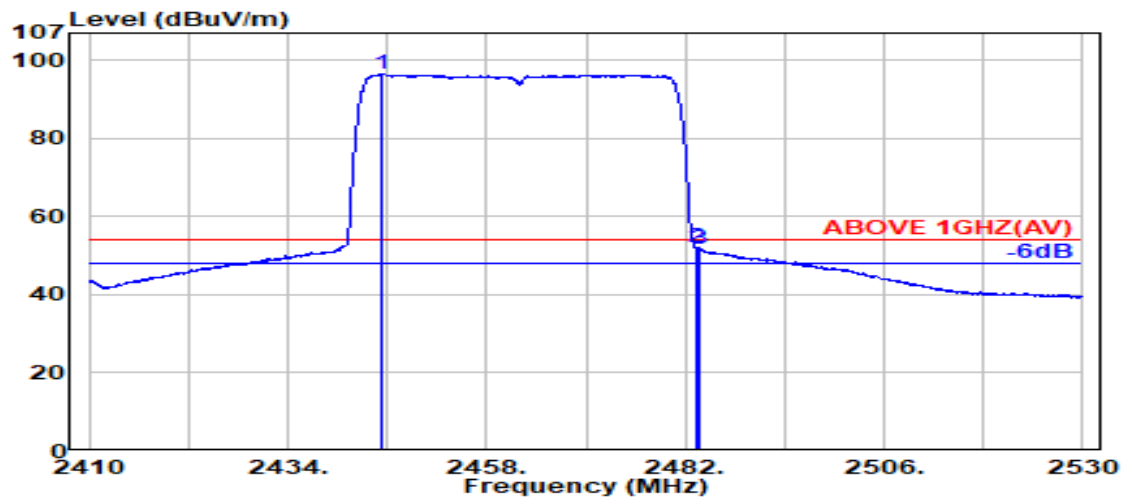


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.450	28.37	6.11	34.51	96.49	96.47	---	---	Average
2483.500	28.47	6.17	34.52	51.80	51.92	54.00	2.08	Average
2483.800	28.47	6.17	34.52	51.58	51.70	54.00	2.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

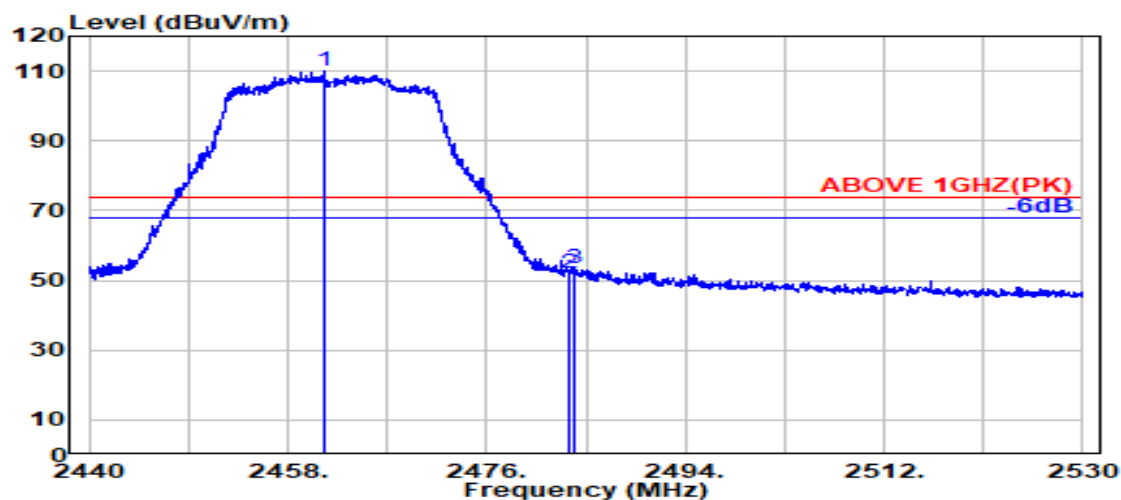

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.250	28.42	6.14	34.51	110.01	110.06	---	---	Peak
	2483.500	28.47	6.17	34.52	52.15	52.27	74.00	21.73	Peak
	2483.950	28.47	6.17	34.52	53.32	53.44	74.00	20.56	Peak

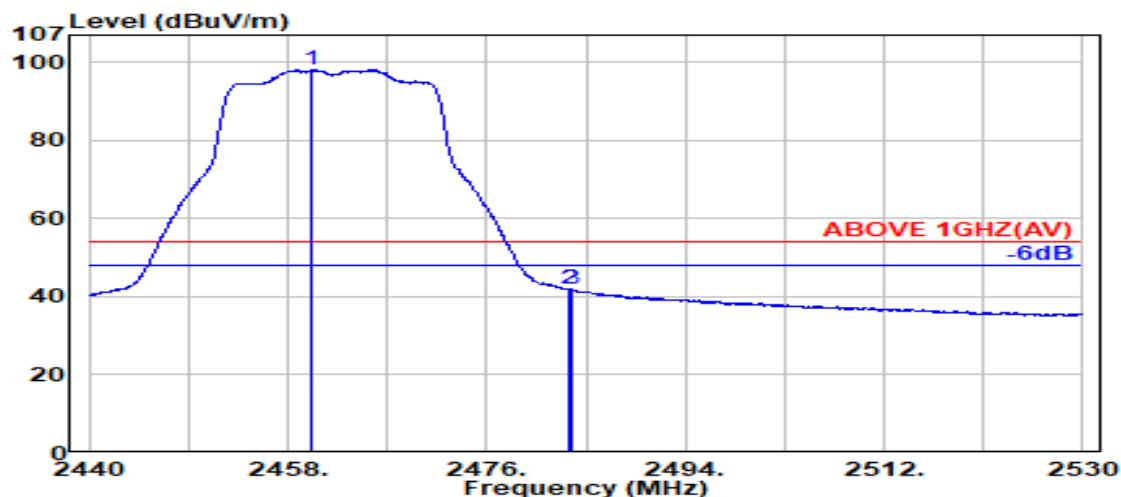

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.150	28.42	6.13	34.51	98.11	98.15	---	---	Average
2483.500	28.47	6.17	34.52	41.79	41.91	54.00	12.09	Average
2483.750	28.47	6.17	34.52	41.77	41.89	54.00	12.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

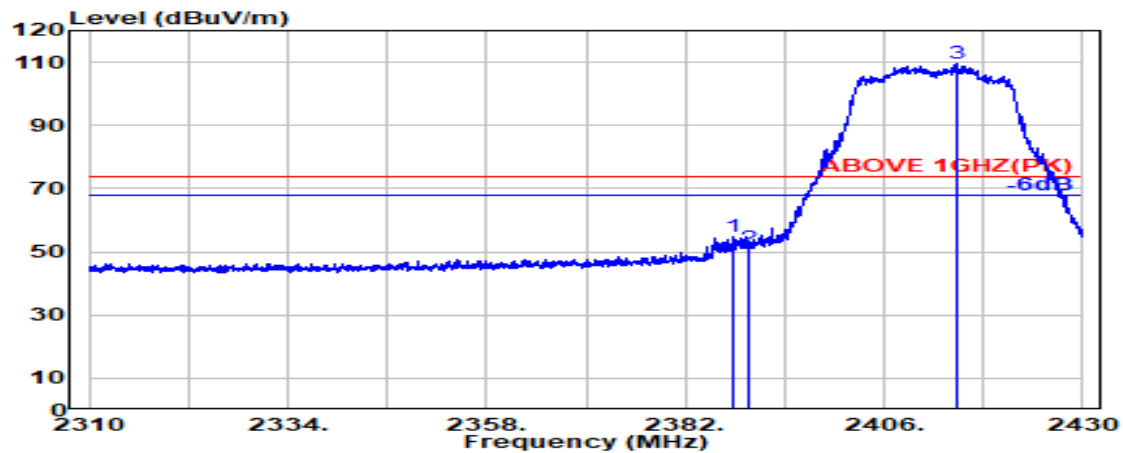

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.900	28.20	6.03	34.50	55.02	54.75	74.00	19.25	Peak
2389.800	28.18	6.03	34.50	51.66	51.37	74.00	22.63	Peak
@ 2414.850	28.19	6.07	34.50	109.86	109.61	---	---	Peak

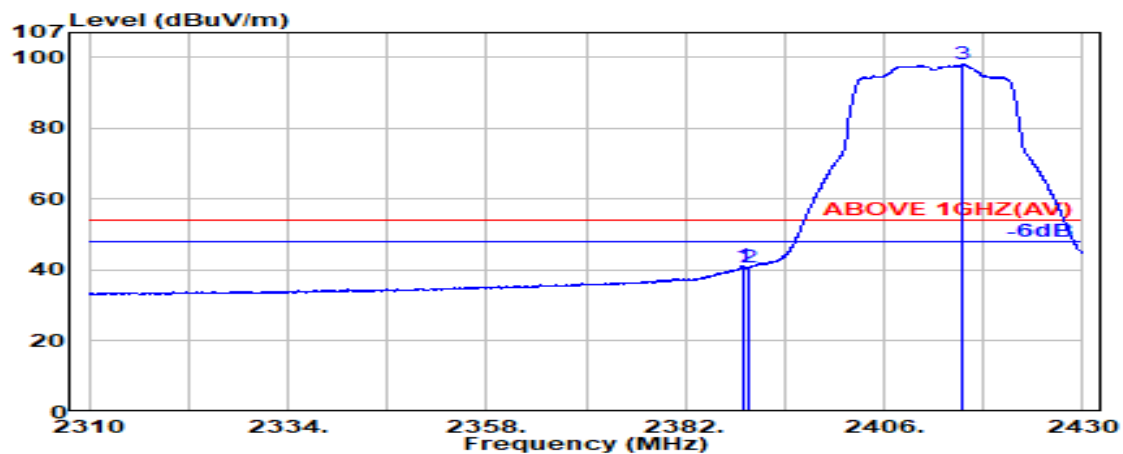


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.50	41.42	41.14	54.00	12.86	Average
2389.800	28.18	6.03	34.50	41.09	40.81	54.00	13.19	Average
@ 2415.450	28.19	6.07	34.50	98.26	98.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

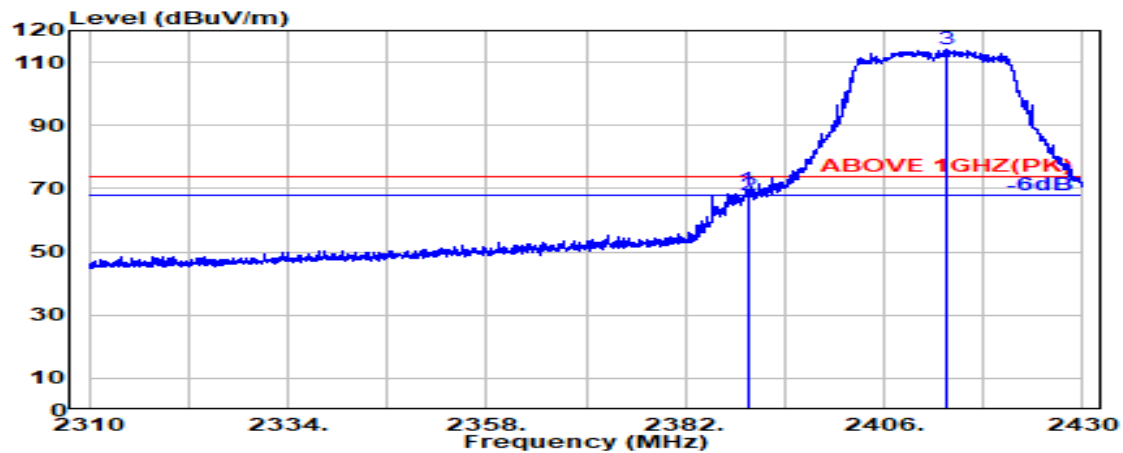

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	69.80	69.52	74.00	4.48	Peak
2389.800	28.18	6.03	34.50	68.17	67.89	74.00	6.11	Peak
@ 2413.550	28.18	6.07	34.50	114.31	114.05	---	---	Peak

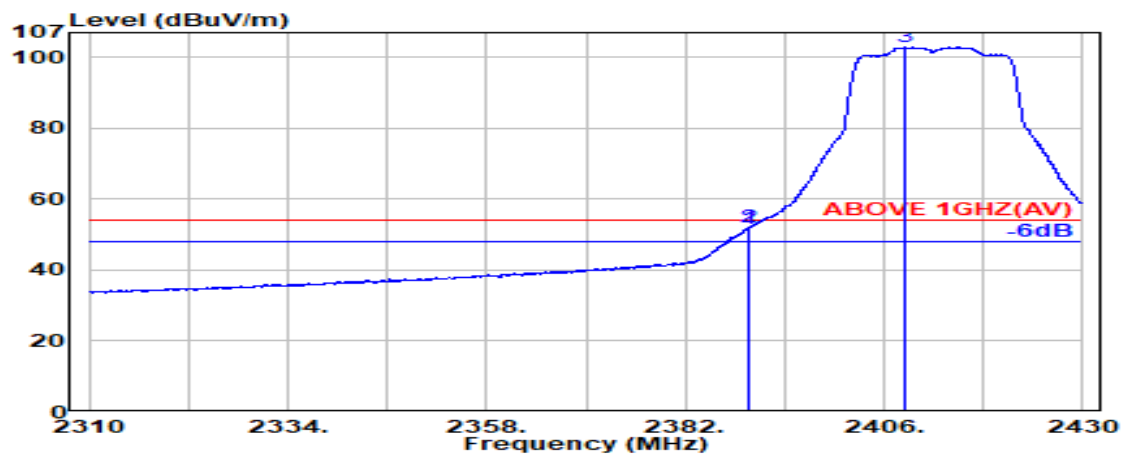

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	51.98	51.70	54.00	2.30	Average
2389.800	28.18	6.03	34.50	52.37	52.09	54.00	1.91	Average
@ 2408.550	28.15	6.06	34.50	103.33	103.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

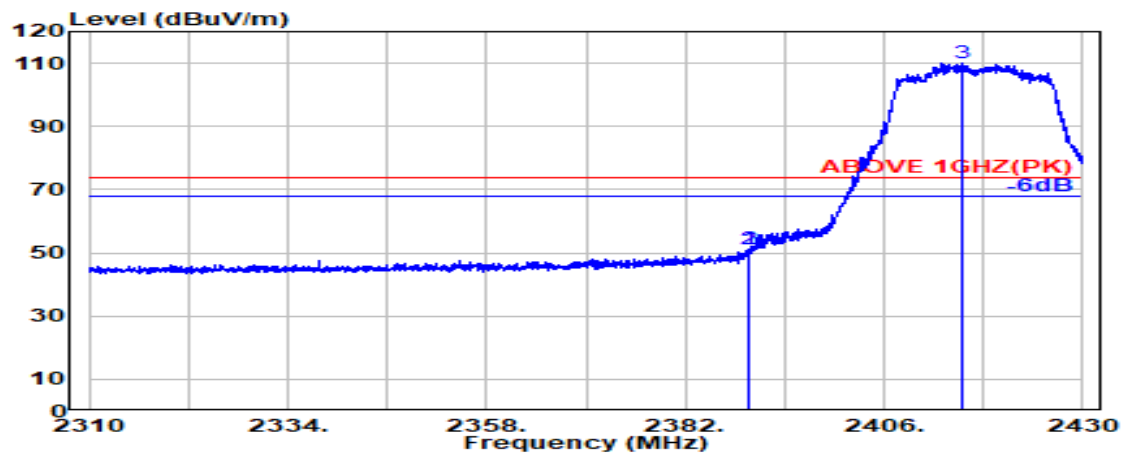

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	51.30	51.02	74.00	22.98	Peak
2389.800	28.18	6.03	34.50	51.26	50.98	74.00	23.02	Peak
@ 2415.350	28.19	6.07	34.50	110.34	110.10	---	---	Peak

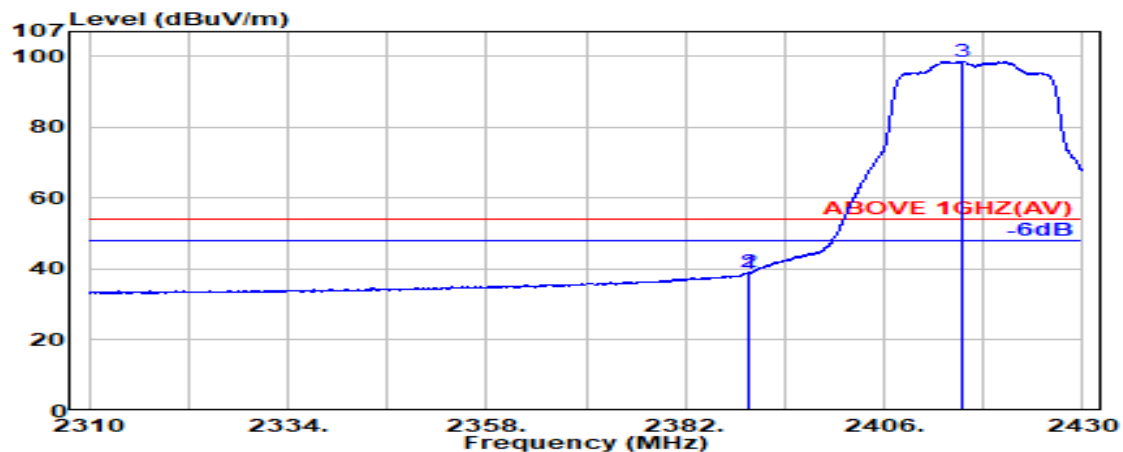


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	39.07	38.79	54.00	15.21	Average
2389.800	28.18	6.03	34.50	39.31	39.03	54.00	14.97	Average
@ 2415.550	28.19	6.07	34.50	98.79	98.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

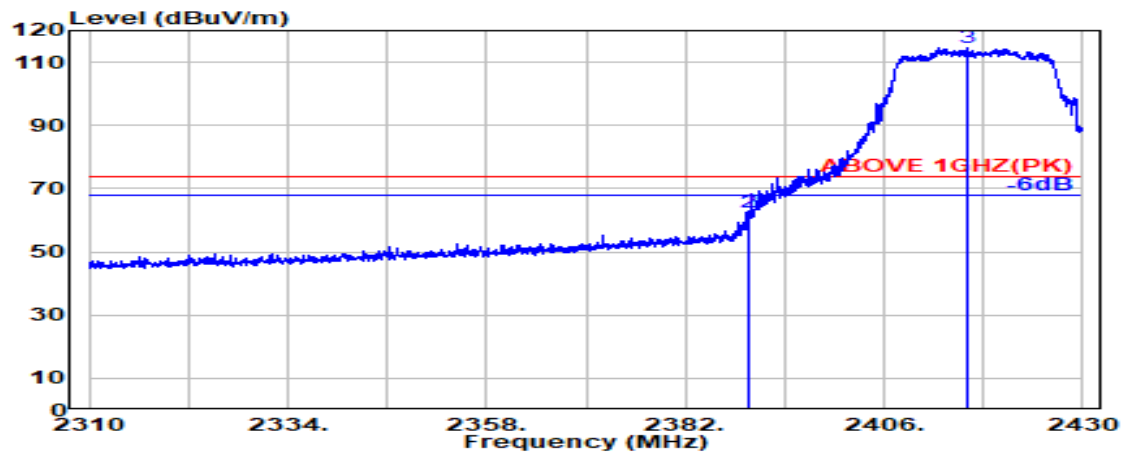

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	63.15	62.87	74.00	11.13	Peak
2389.800	28.18	6.03	34.50	62.89	62.61	74.00	11.39	Peak
@ 2416.050	28.20	6.07	34.50	114.75	114.52	---	---	Peak

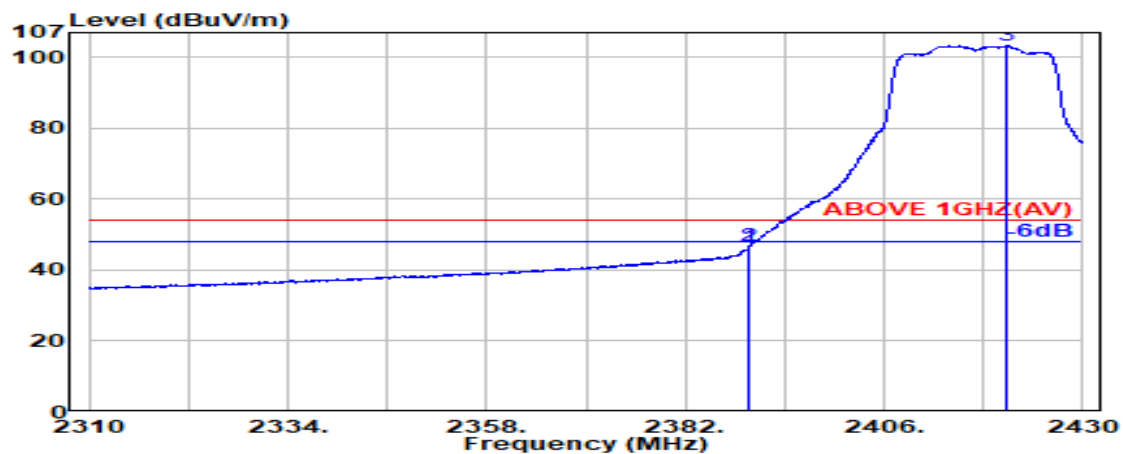

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	46.67	46.39	54.00	7.61	Average
2389.800	28.18	6.03	34.50	46.98	46.69	54.00	7.31	Average
@ 2420.850	28.23	6.08	34.50	103.53	103.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

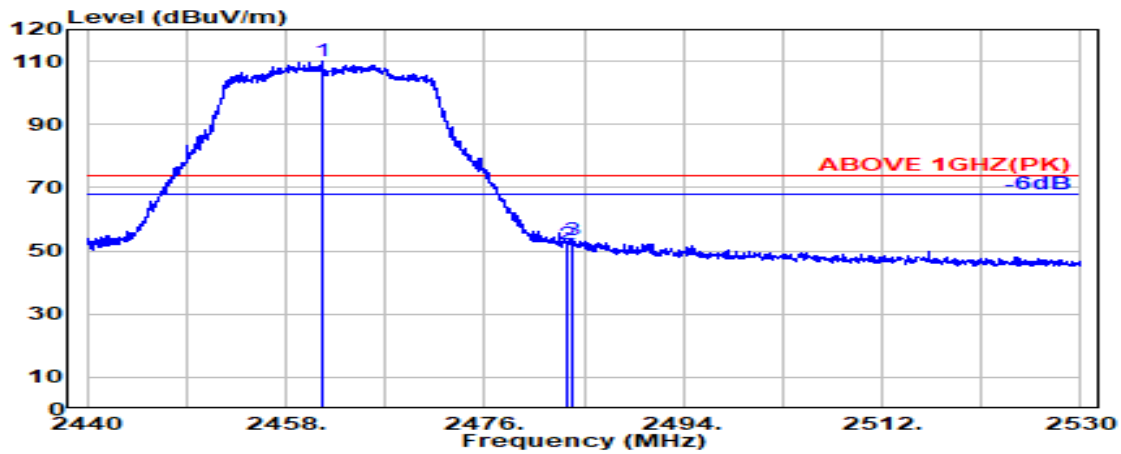

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.42	6.14	34.51	110.01	110.06	---	---	Peak
2483.500	28.47	6.17	34.52	52.15	52.27	74.00	21.73	Peak
2483.950	28.47	6.17	34.52	53.32	53.44	74.00	20.56	Peak

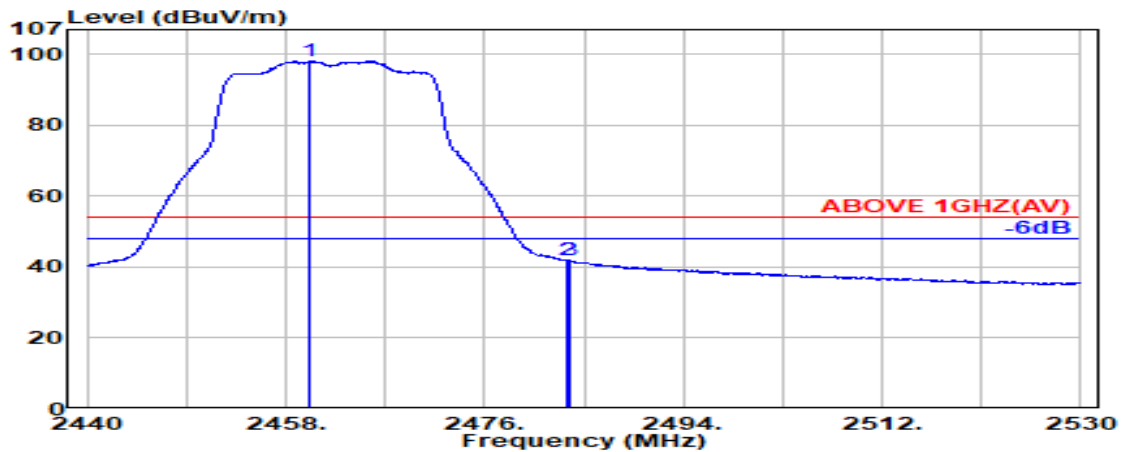

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.150	28.42	6.13	34.51	98.11	98.15	---	---	Average
2483.500	28.47	6.17	34.52	41.79	41.91	54.00	12.09	Average
2483.750	28.47	6.17	34.52	41.77	41.89	54.00	12.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

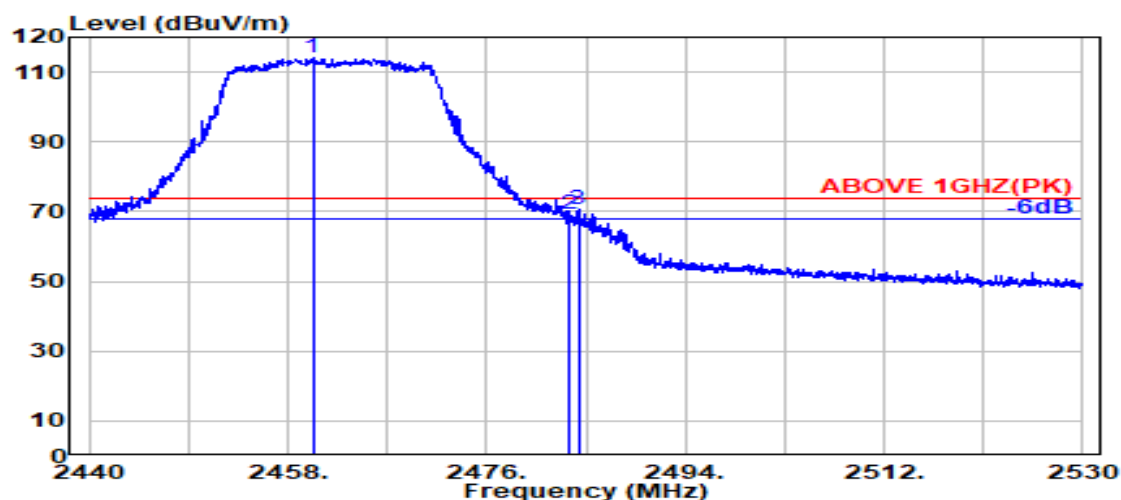

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.250	28.42	6.13	34.51	113.85	113.89	---	---	Peak
2483.500	28.47	6.17	34.52	69.09	69.21	74.00	4.79	Peak
2484.300	28.47	6.17	34.52	70.52	70.64	74.00	3.36	Peak

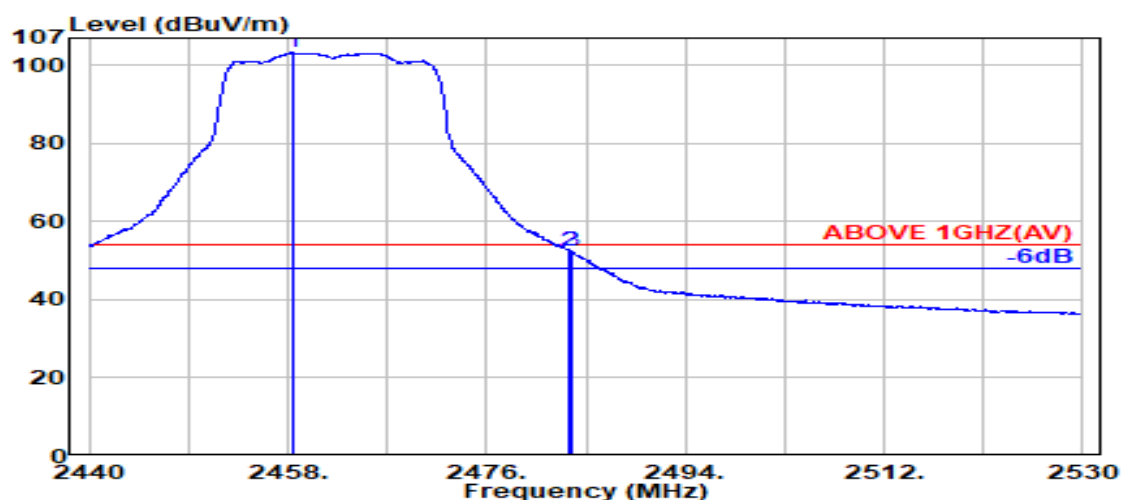

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.550	28.42	6.13	34.51	103.19	103.23	---	---	Average
2483.500	28.47	6.17	34.52	52.30	52.42	54.00	1.58	Average
2483.700	28.47	6.17	34.52	52.19	52.31	54.00	1.69	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

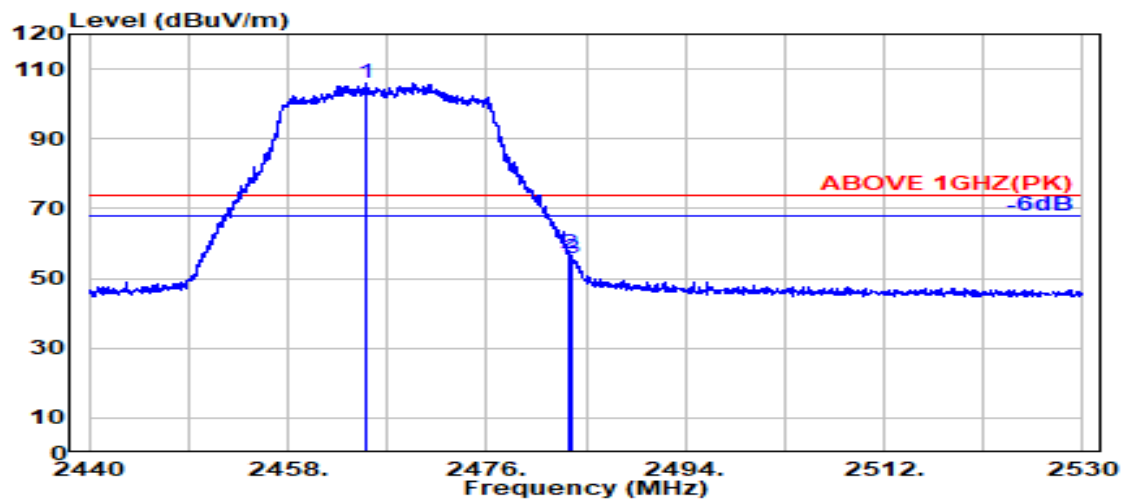

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.43	6.14	34.51	105.80	105.86	---	---	Peak
2483.500	28.47	6.17	34.52	56.98	57.10	74.00	16.90	Peak
2483.700	28.47	6.17	34.52	55.66	55.78	74.00	18.22	Peak

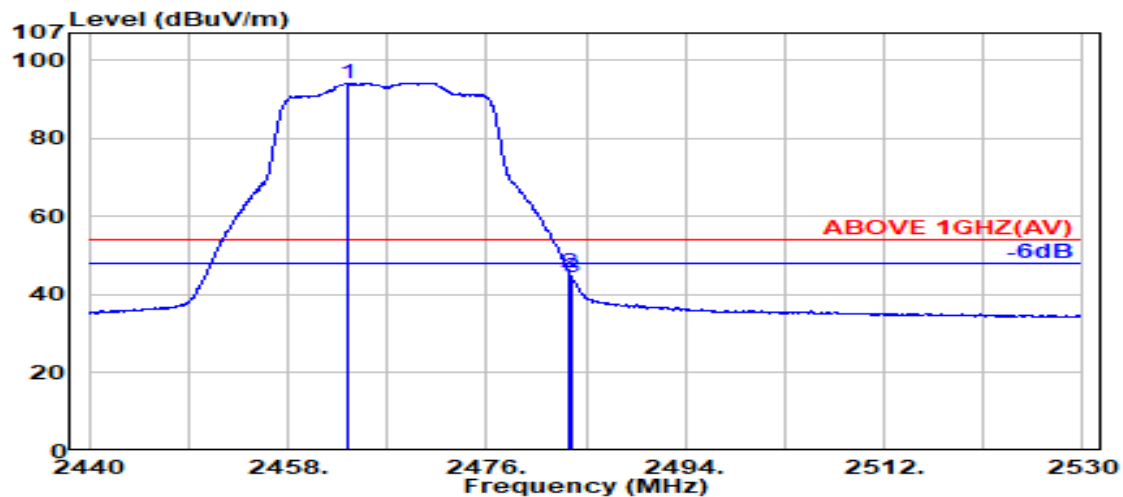

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.450	28.43	6.14	34.51	94.22	94.28	---	---	Average
2483.500	28.47	6.17	34.52	45.68	45.80	54.00	8.20	Average
2483.700	28.47	6.17	34.52	44.37	44.49	54.00	9.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

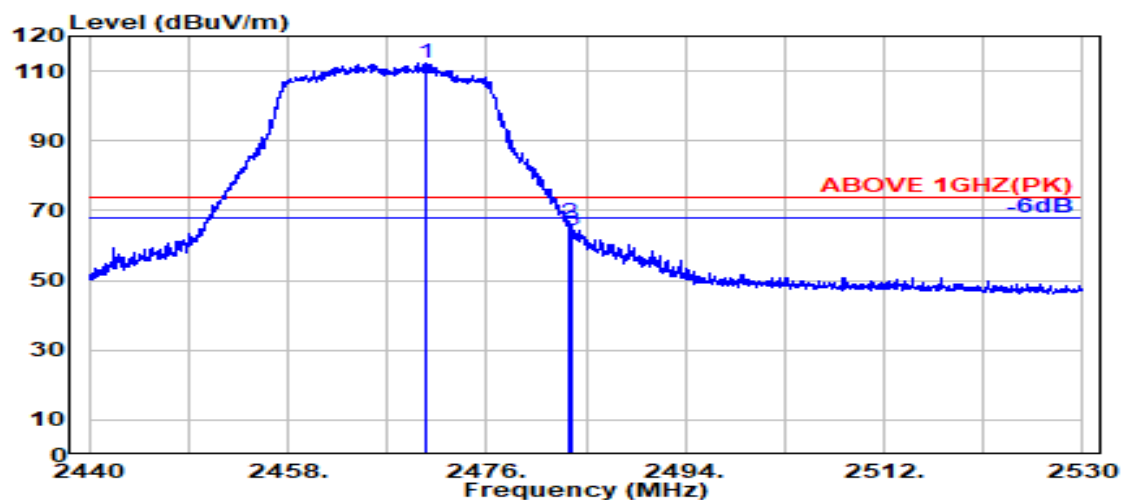

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.400	28.44	6.15	34.51	112.42	112.49	---	---	Peak
2483.500	28.47	6.17	34.52	66.31	66.43	74.00	7.57	Peak
2483.800	28.47	6.17	34.52	64.37	64.48	74.00	9.52	Peak

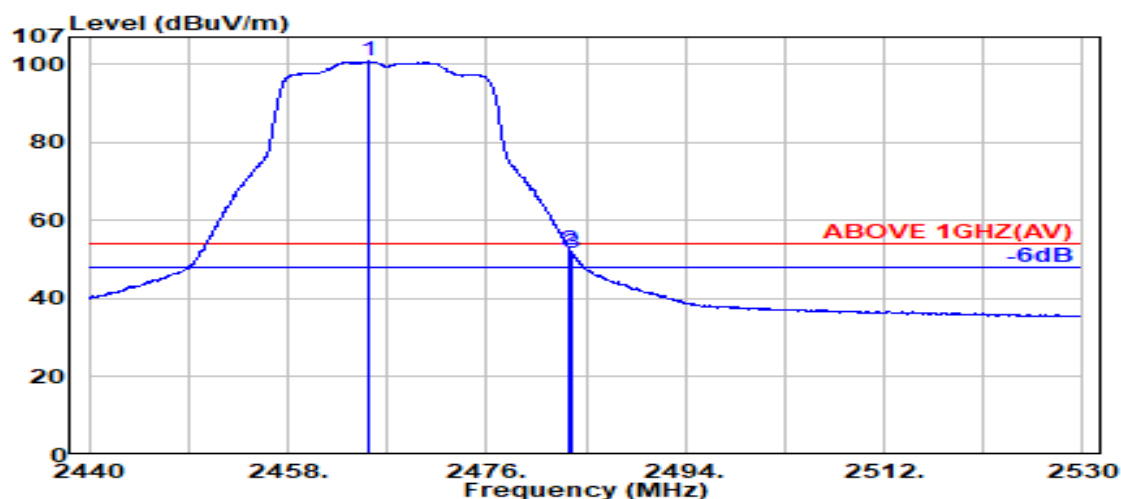

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.43	6.14	34.51	100.72	100.78	---	---	Average
2483.500	28.47	6.17	34.52	52.56	52.67	54.00	1.33	Average
2483.700	28.47	6.17	34.52	51.75	51.87	54.00	2.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

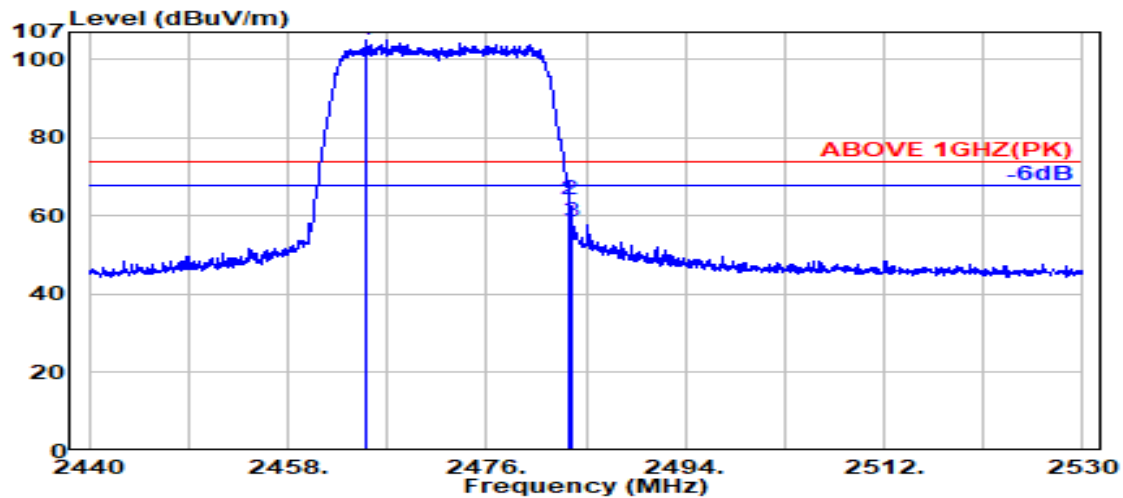

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.43	6.14	34.51	104.91	104.97	---	---	Peak
2483.500	28.47	6.17	34.52	64.10	64.22	74.00	9.78	Peak
2483.800	28.47	6.17	34.52	58.33	58.45	74.00	15.55	Peak

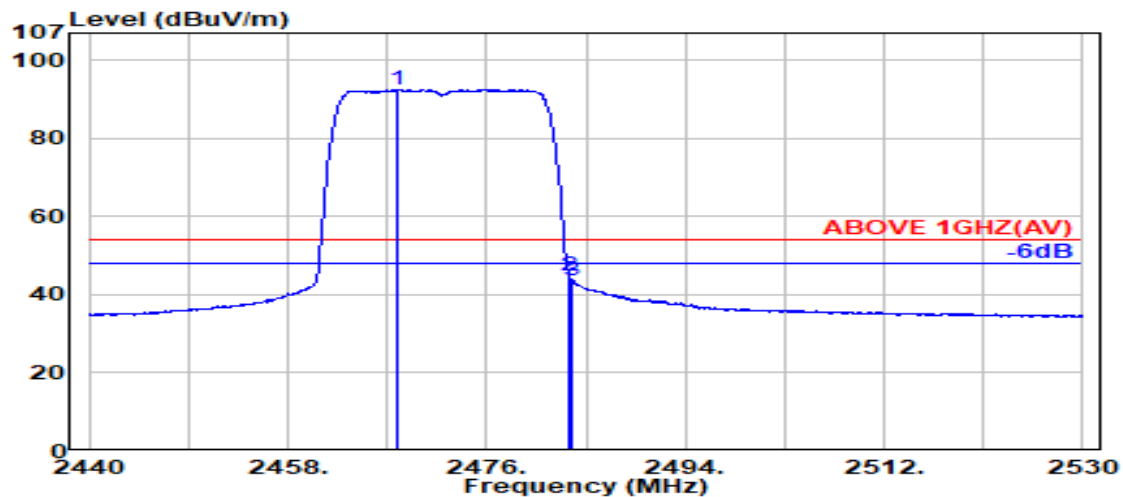

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.850	28.44	6.15	34.51	92.48	92.55	---	---	Average
2483.500	28.47	6.17	34.52	44.68	44.80	54.00	9.20	Average
2483.700	28.47	6.17	34.52	43.68	43.80	54.00	10.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

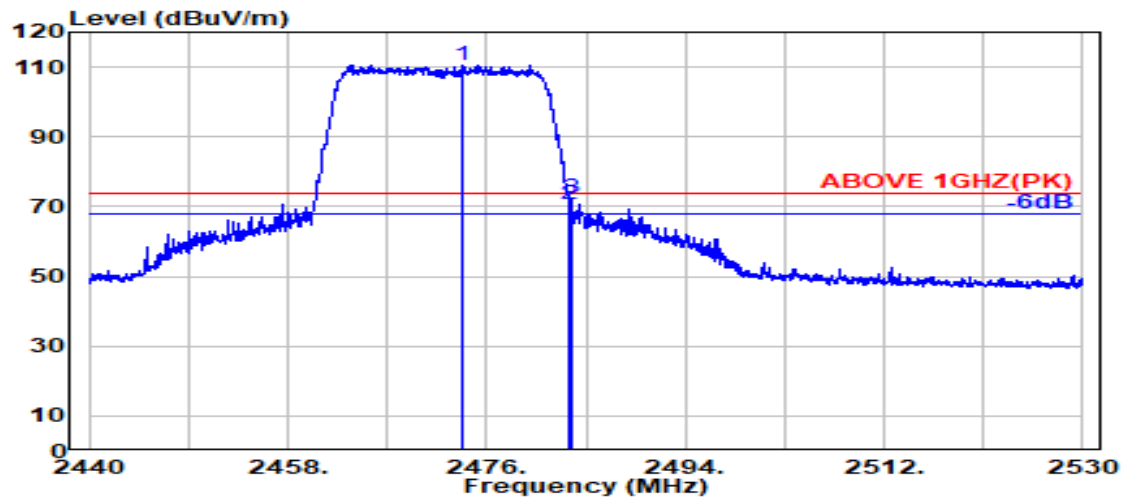

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.750	28.45	6.15	34.51	110.59	110.67	---	---	Peak
2483.500	28.47	6.17	34.52	70.60	70.72	74.00	3.28	Peak
2483.700	28.47	6.17	34.52	72.13	72.25	74.00	1.75	Peak

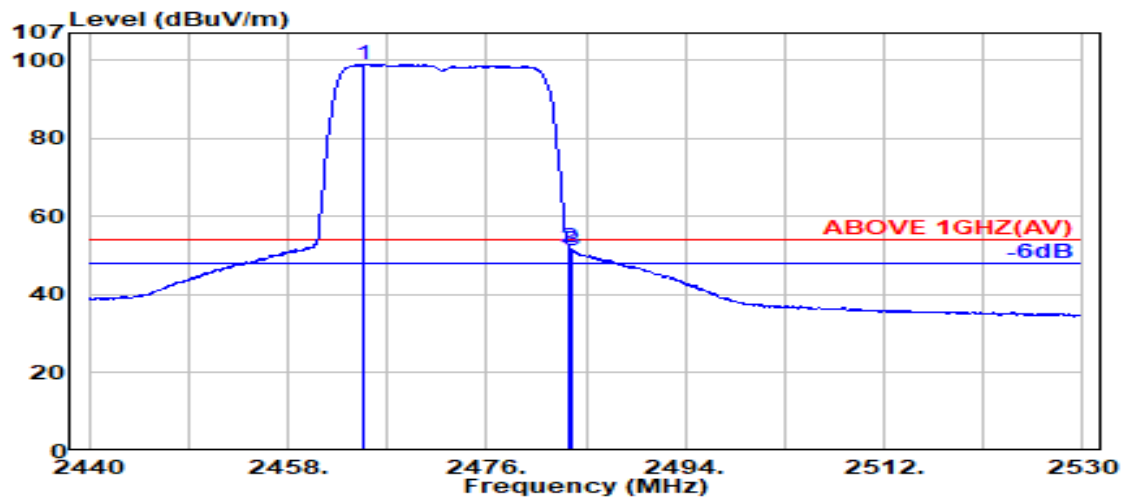

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.900	28.43	6.14	34.51	98.95	99.00	---	---	Average
2483.500	28.47	6.17	34.52	51.81	51.93	54.00	2.07	Average
2483.700	28.47	6.17	34.52	51.13	51.25	54.00	2.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

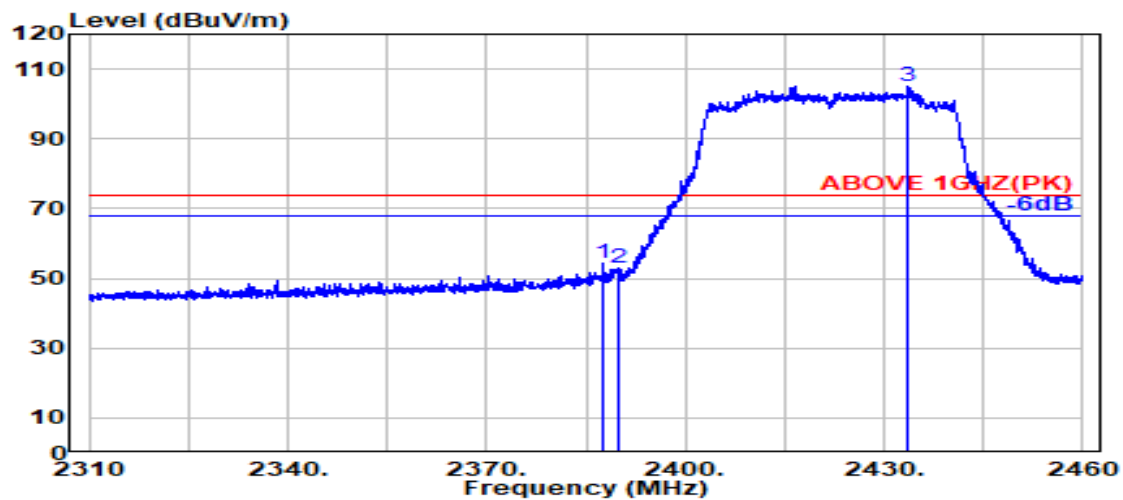

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.600	28.20	6.03	34.50	54.40	54.13	74.00	19.87	Peak
2389.800	28.18	6.03	34.50	53.34	53.06	74.00	20.94	Peak
@ 2433.700	28.30	6.10	34.51	105.22	105.12	---	---	Peak

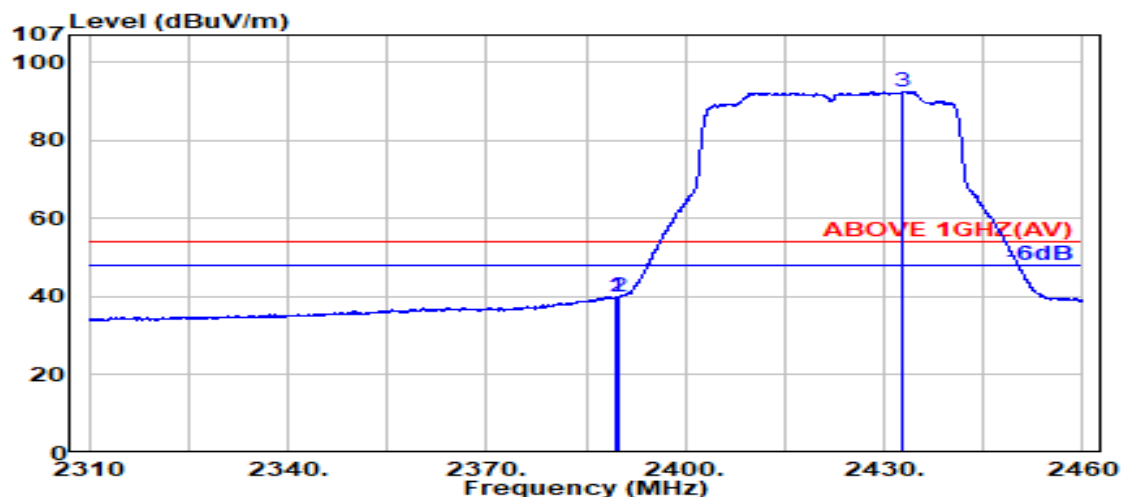

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	40.28	40.00	54.00	14.00	Average
2389.800	28.18	6.03	34.50	40.10	39.82	54.00	14.18	Average
@ 2432.700	28.30	6.10	34.51	92.75	92.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

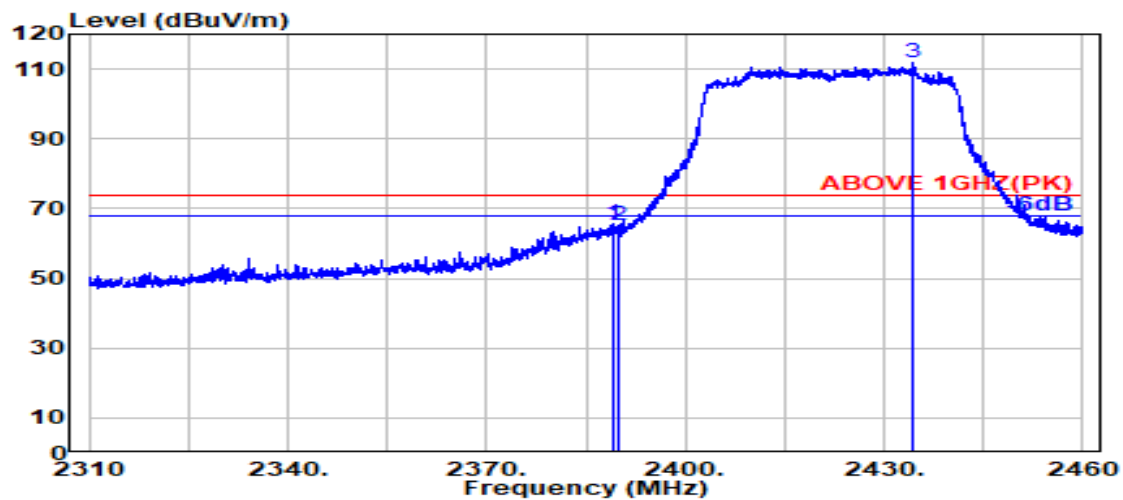

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.19	6.03	34.50	66.03	65.75	74.00	8.25	Peak
2389.800	28.18	6.03	34.50	65.27	64.98	74.00	9.02	Peak
@ 2434.500	28.31	6.10	34.51	111.76	111.66	---	---	Peak

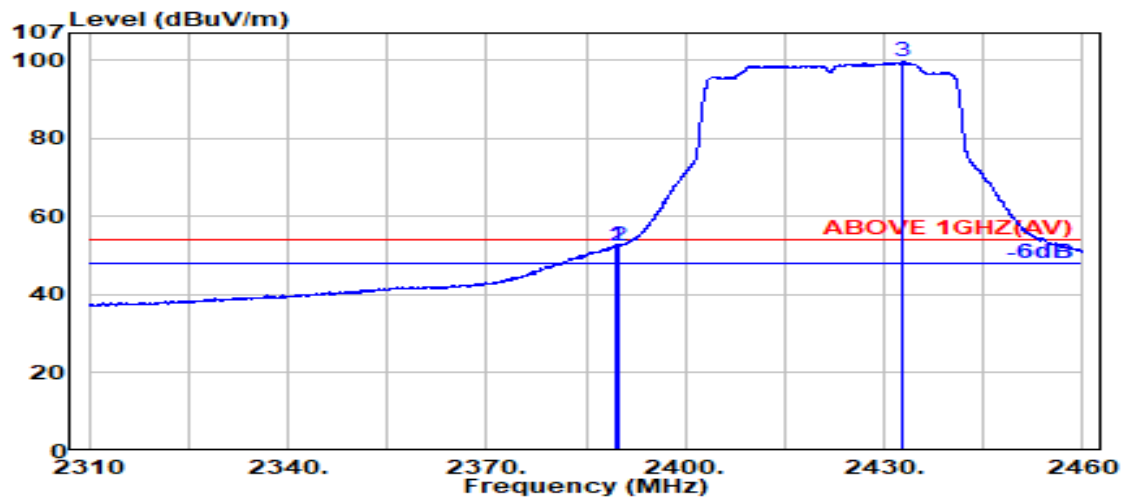

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	52.72	52.44	54.00	1.56	Average
2389.800	28.18	6.03	34.50	52.75	52.47	54.00	1.53	Average
@ 2432.900	28.30	6.10	34.51	99.90	99.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

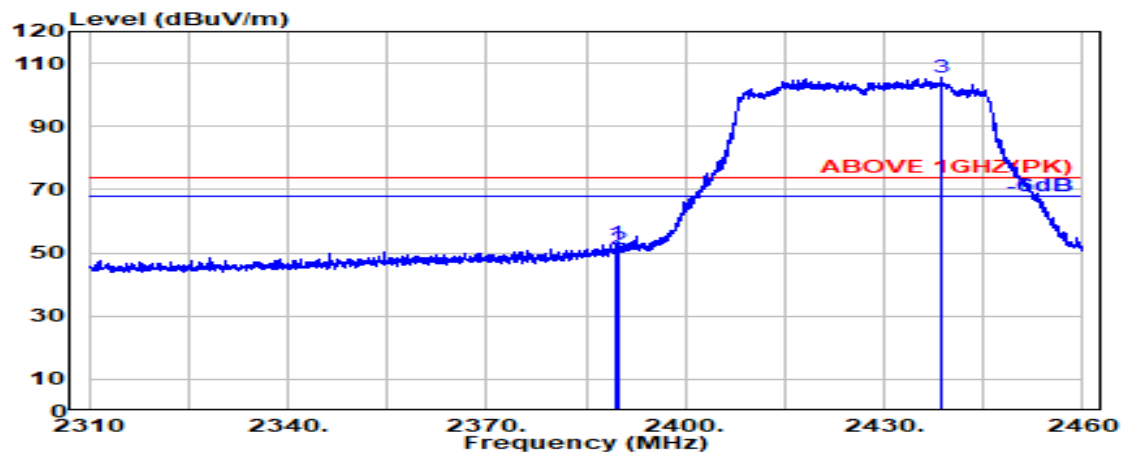

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	53.06	52.78	74.00	21.22	Peak
2389.800	28.18	6.03	34.50	51.35	51.07	74.00	22.93	Peak
@ 2438.750	28.33	6.10	34.51	105.41	105.34	---	---	Peak

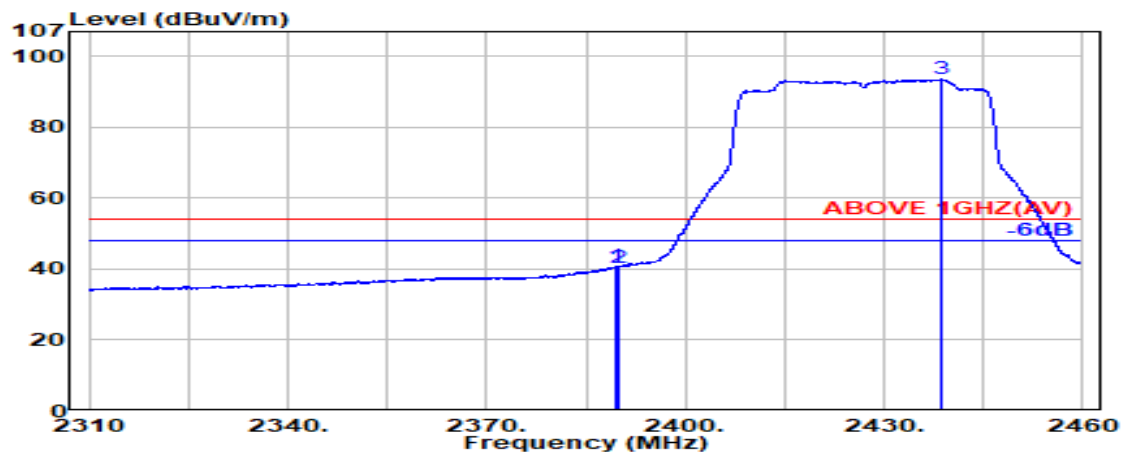

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	40.97	40.69	54.00	13.31	Average
2389.800	28.18	6.03	34.50	40.74	40.46	54.00	13.54	Average
@ 2438.650	28.33	6.10	34.51	93.78	93.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

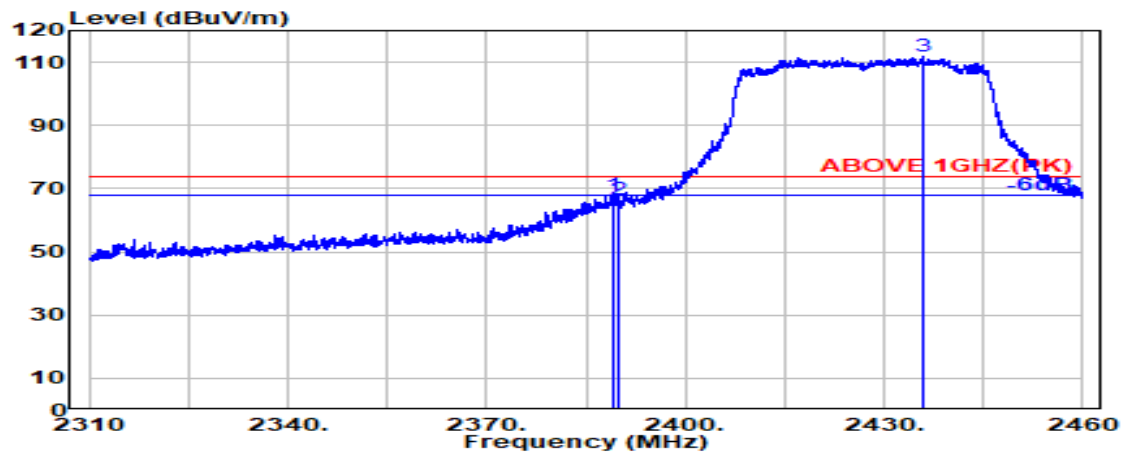

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.19	6.03	34.50	68.24	67.97	74.00	6.03	Peak
2389.800	28.18	6.03	34.50	66.92	66.64	74.00	7.36	Peak
@ 2436.000	28.32	6.10	34.51	111.81	111.72	---	---	Peak

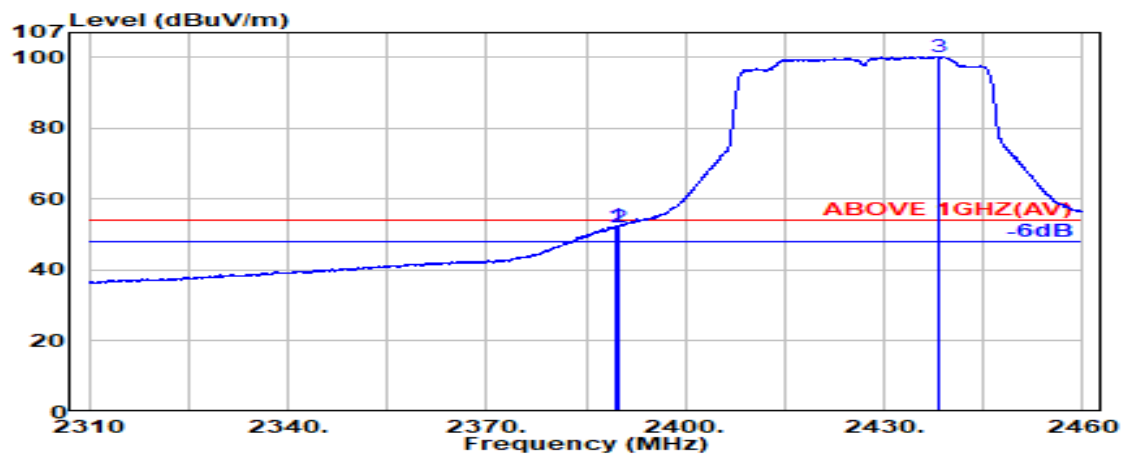

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	52.74	52.46	54.00	1.54	Average
2389.800	28.18	6.03	34.50	52.43	52.15	54.00	1.85	Average
@ 2438.400	28.33	6.10	34.51	100.34	100.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

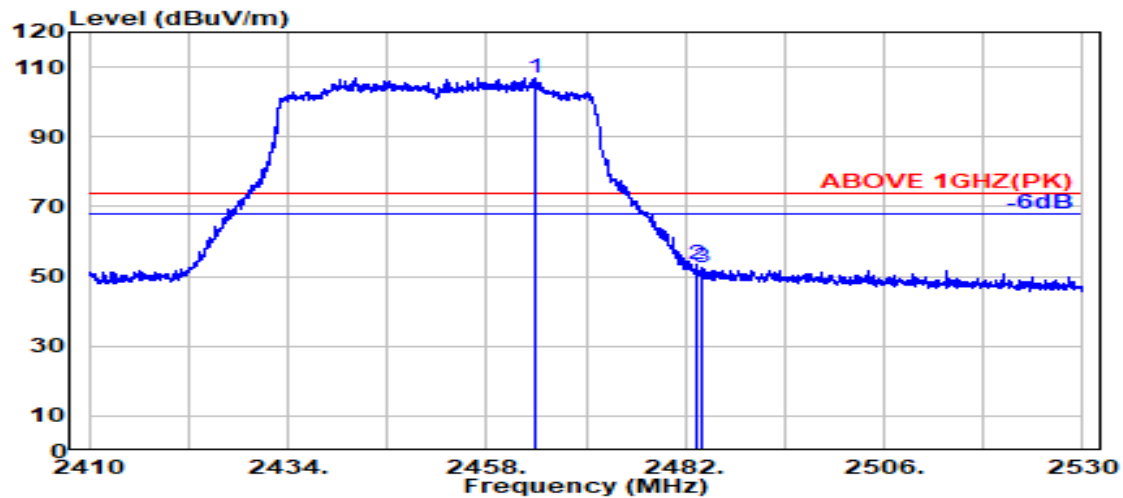

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.750	28.43	6.14	34.51	106.80	106.85	---	---	Peak
2483.500	28.47	6.17	34.52	53.37	53.49	74.00	20.51	Peak
2484.000	28.47	6.17	34.52	52.30	52.42	74.00	21.58	Peak

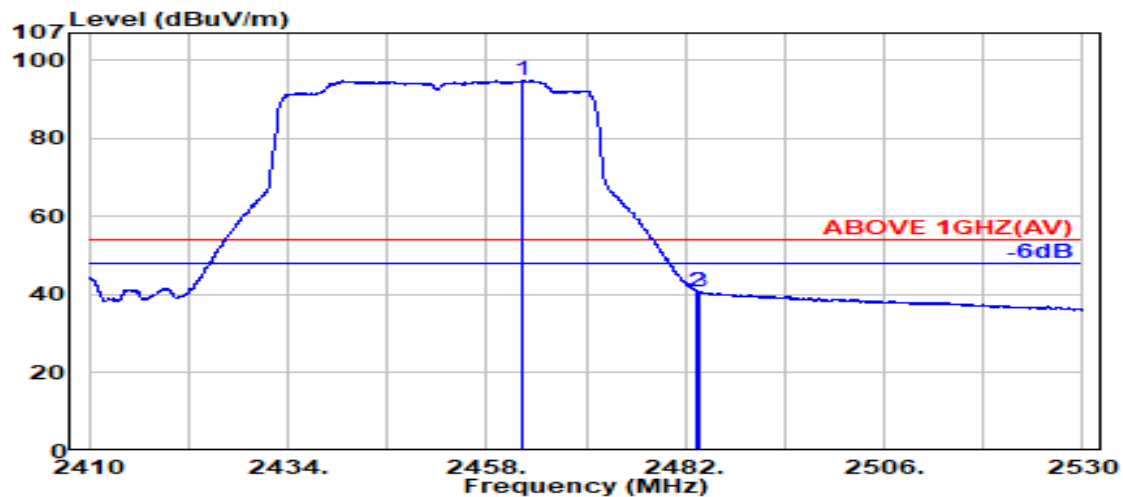

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.350	28.42	6.14	34.51	94.84	94.89	---	---	Average
2483.500	28.47	6.17	34.52	40.67	40.79	54.00	13.21	Average
2483.800	28.47	6.17	34.52	40.81	40.93	54.00	13.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

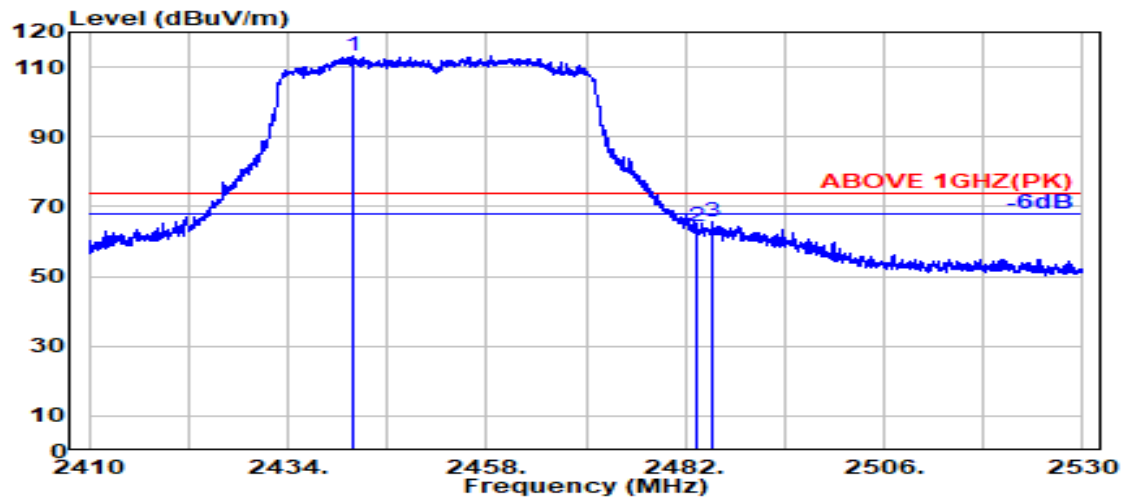

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2441.750	28.35	6.11	34.51	113.18	113.13	---	---	Peak
2483.500	28.47	6.17	34.52	64.23	64.34	74.00	9.66	Peak
2485.200	28.47	6.17	34.52	65.47	65.59	74.00	8.41	Peak

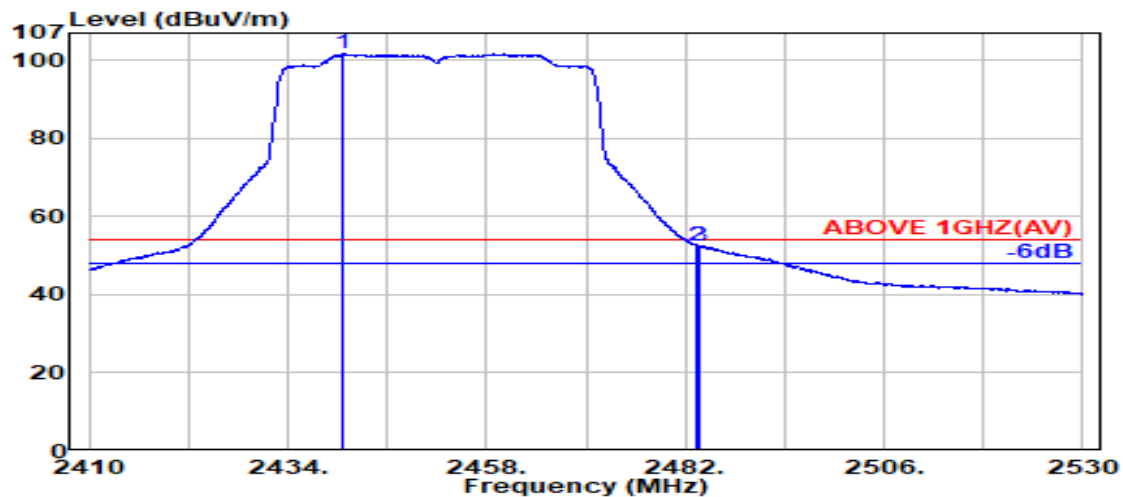

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.550	28.34	6.11	34.51	101.75	101.69	---	---	Average
2483.500	28.47	6.17	34.52	52.37	52.48	54.00	1.52	Average
2483.700	28.47	6.17	34.52	52.34	52.46	54.00	1.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

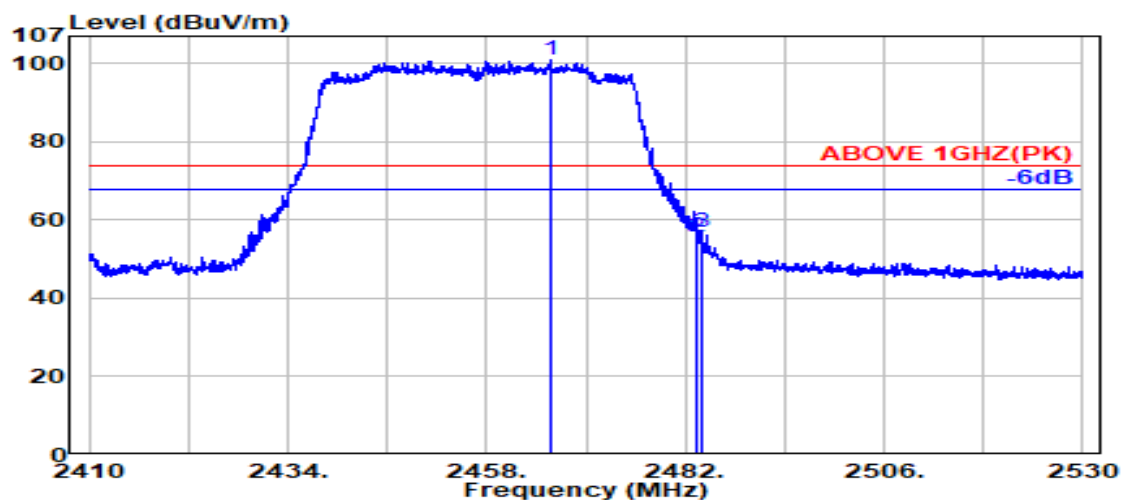

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.650	28.43	6.14	34.51	100.99	101.05	---	---	Peak
2483.500	28.47	6.17	34.52	55.55	55.67	74.00	18.33	Peak
2484.000	28.47	6.17	34.52	56.79	56.91	74.00	17.09	Peak

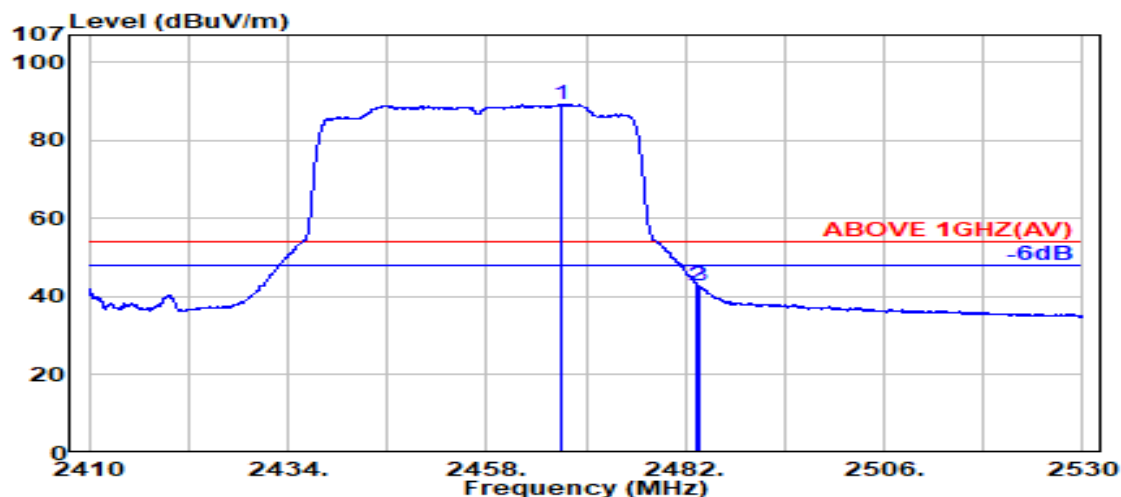

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.950	28.43	6.14	34.51	89.10	89.17	---	---	Average
2483.500	28.47	6.17	34.52	42.74	42.85	54.00	11.15	Average
2483.750	28.47	6.17	34.52	42.73	42.85	54.00	11.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

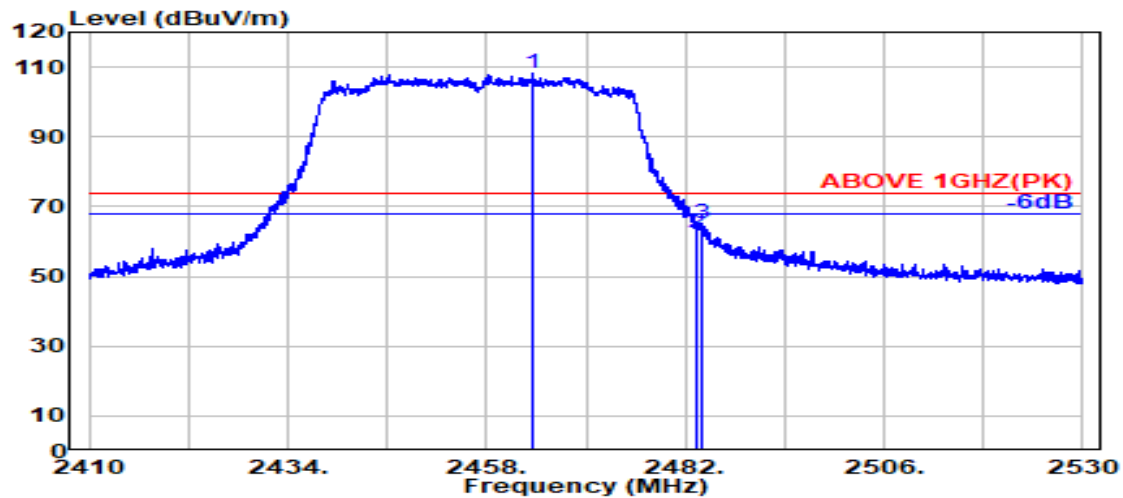

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.43	6.14	34.51	108.14	108.19	---	---	Peak
2483.500	28.47	6.17	34.52	62.50	62.62	74.00	11.38	Peak
2483.850	28.47	6.17	34.52	65.18	65.30	74.00	8.70	Peak

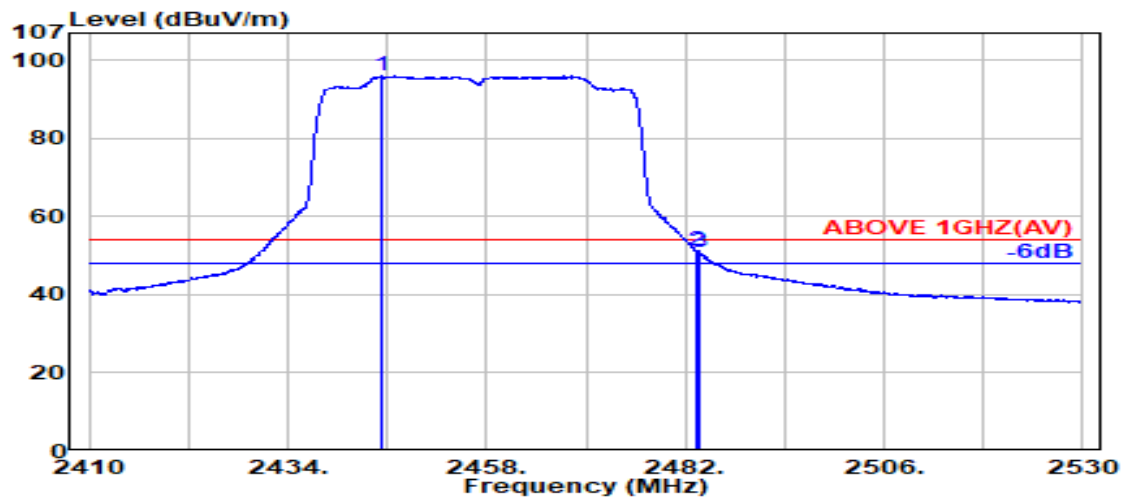

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.450	28.37	6.11	34.51	96.01	95.99	---	---	Average
2483.500	28.47	6.17	34.52	50.99	51.11	54.00	2.89	Average
2483.700	28.47	6.17	34.52	50.59	50.71	54.00	3.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

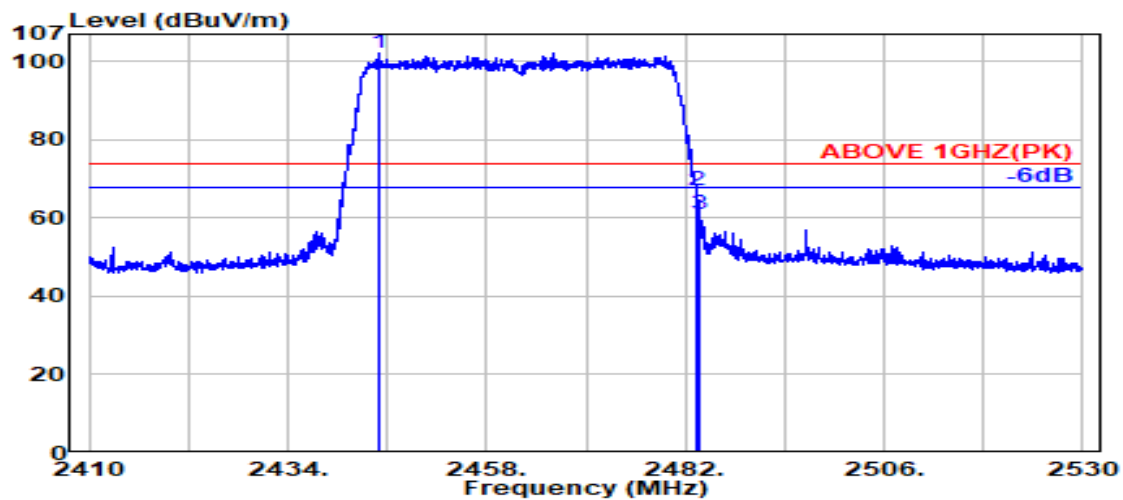

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.900	28.37	6.11	34.51	102.34	102.32	---	---	Peak
2483.500	28.47	6.17	34.52	66.72	66.84	74.00	7.16	Peak
2483.700	28.47	6.17	34.52	60.91	61.03	74.00	12.97	Peak

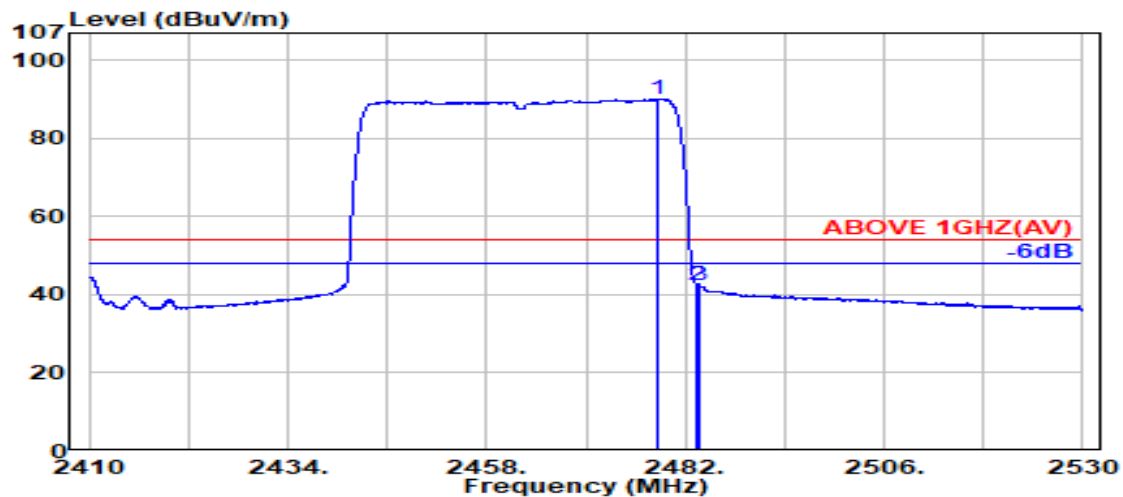

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.650	28.46	6.16	34.52	90.08	90.18	---	---	Average
2483.500	28.47	6.17	34.52	42.47	42.58	54.00	11.42	Average
2483.750	28.47	6.17	34.52	42.30	42.42	54.00	11.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

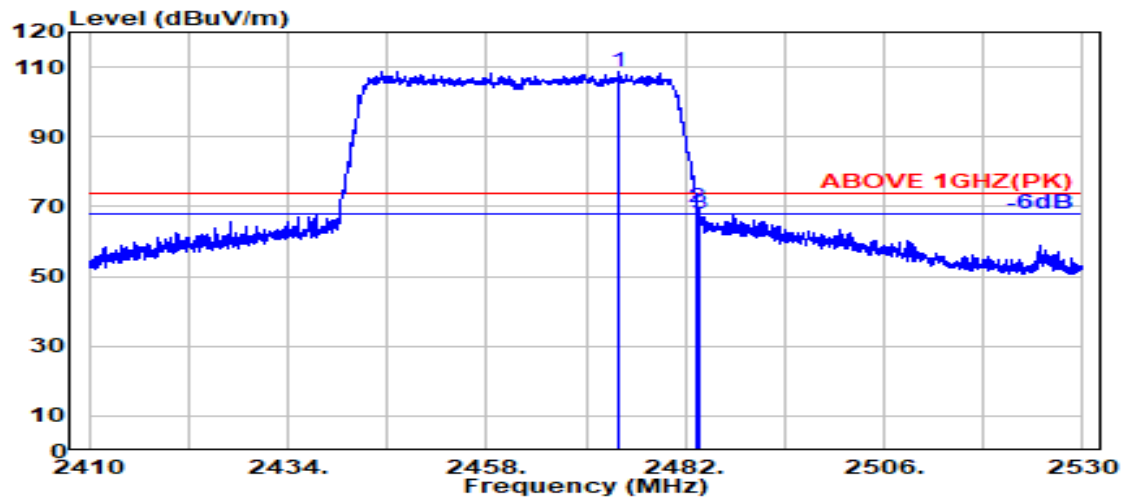

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.000	28.45	6.15	34.51	108.58	108.67	---	---	Peak
2483.500	28.47	6.17	34.52	69.74	69.85	74.00	4.15	Peak
2483.700	28.47	6.17	34.52	67.72	67.83	74.00	6.17	Peak

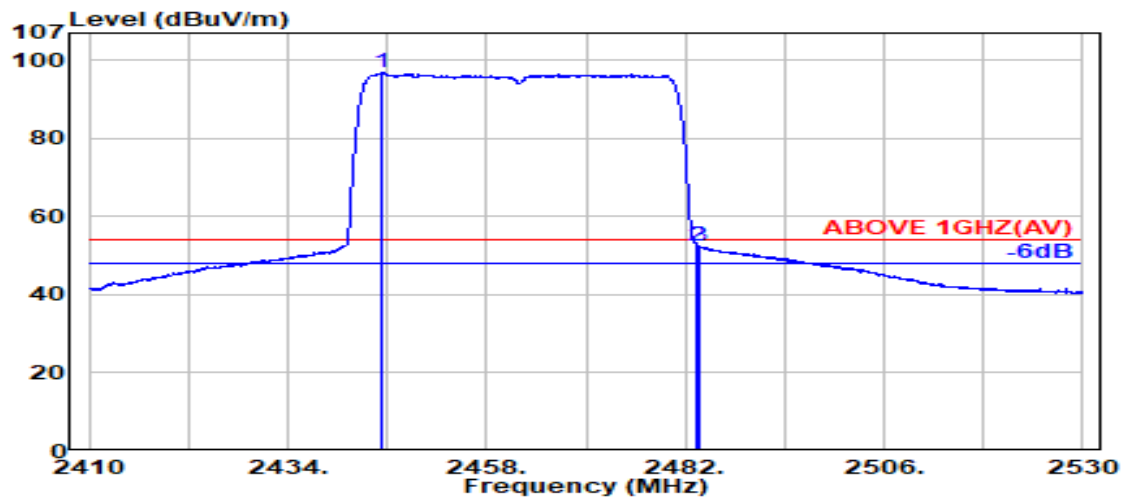

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.400	28.37	6.11	34.51	96.99	96.96	---	---	Average
2483.500	28.47	6.17	34.52	52.38	52.49	54.00	1.51	Average
2483.700	28.47	6.17	34.52	52.24	52.36	54.00	1.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

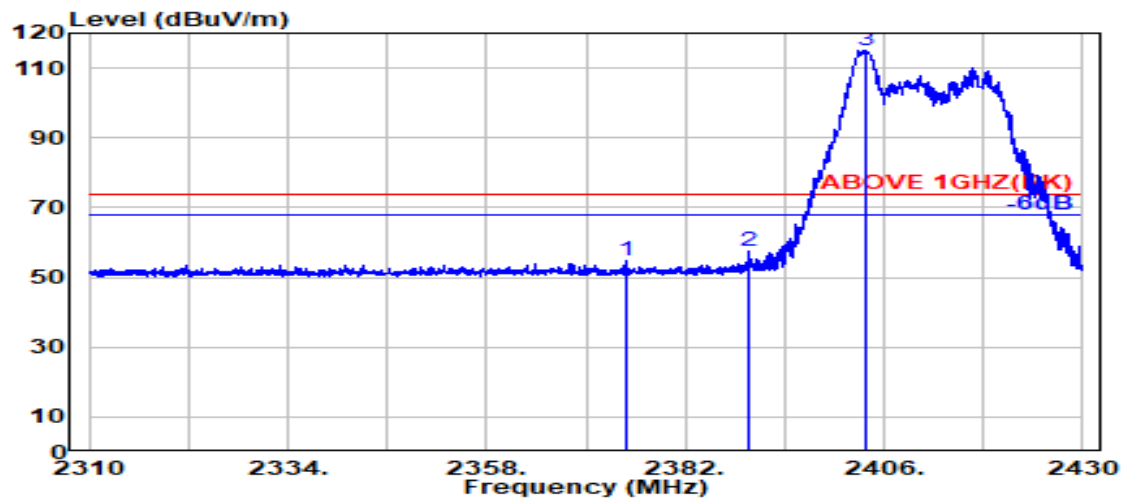

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2374.900	28.30	6.01	34.49	54.98	54.79	74.00	19.21	Peak
2389.800	28.18	6.03	34.50	57.58	57.29	74.00	16.71	Peak
@ 2403.800	28.12	6.05	34.50	115.47	115.14	---	---	Peak

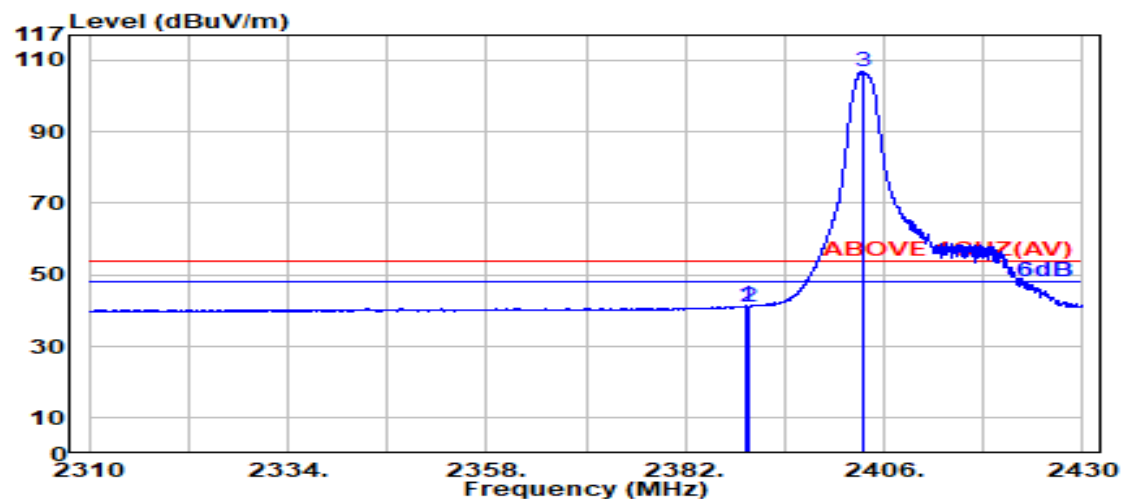

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	41.61	41.33	54.00	12.67	Average
2389.800	28.18	6.03	34.50	41.54	41.26	54.00	12.74	Average
@ 2403.400	28.12	6.05	34.50	107.16	106.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

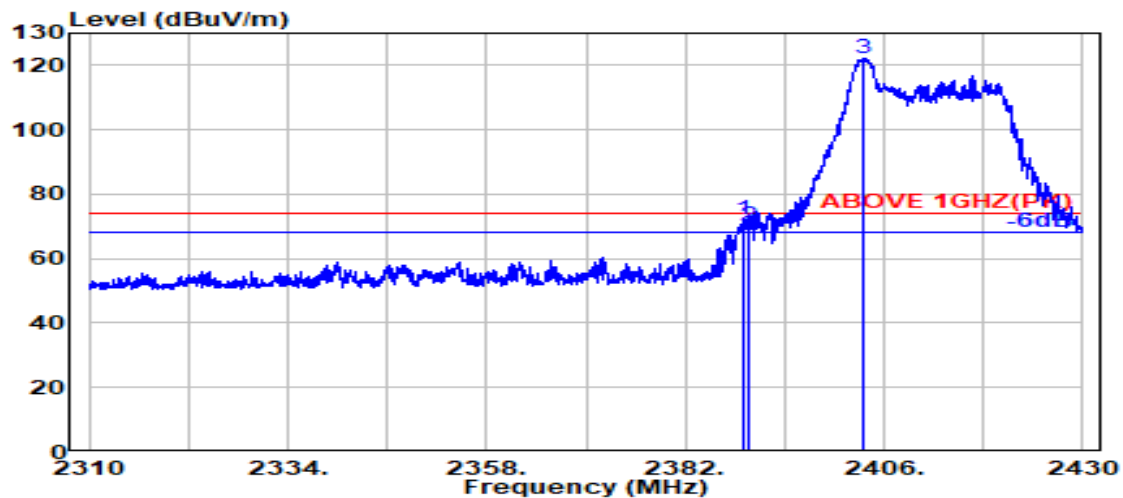

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.950	28.19	6.03	34.50	72.37	72.09	74.00	1.91	Peak
2389.800	28.18	6.03	34.50	70.45	70.17	74.00	3.83	Peak
@ 2403.400	28.12	6.05	34.50	122.30	121.98	---	---	Peak

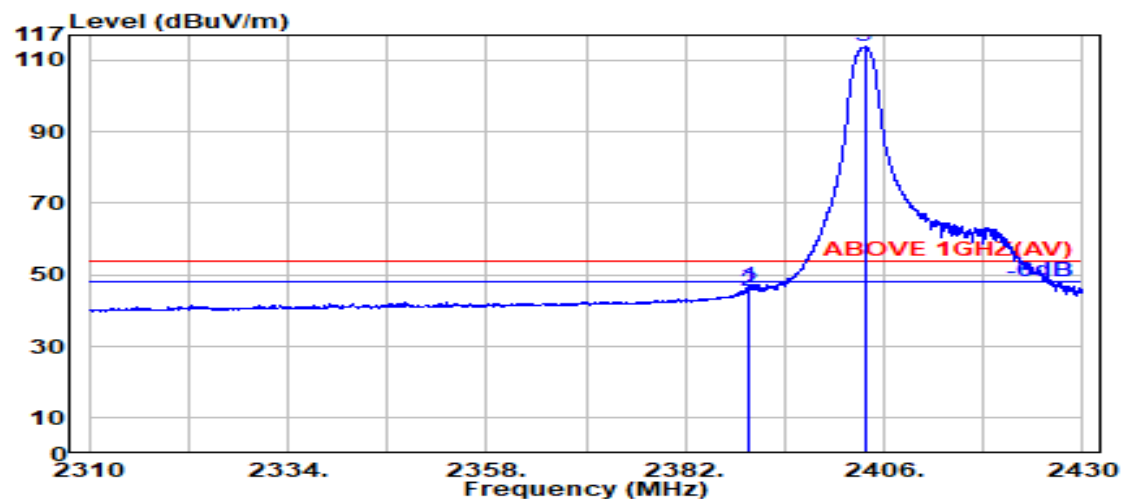

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	47.23	46.95	54.00	7.05	Average
2389.800	28.18	6.03	34.50	45.70	45.41	54.00	8.59	Average
@ 2403.650	28.12	6.05	34.50	114.02	113.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

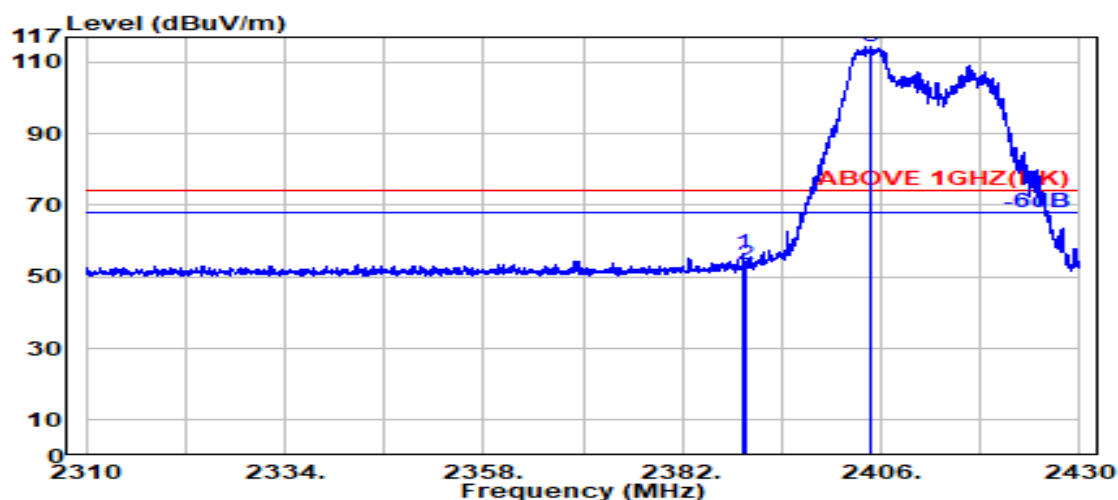

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	56.61	56.33	74.00	17.67	Peak
2389.800	28.18	6.03	34.50	53.91	53.63	74.00	20.37	Peak
@ 2404.800	28.13	6.06	34.50	114.63	114.32	---	---	Peak

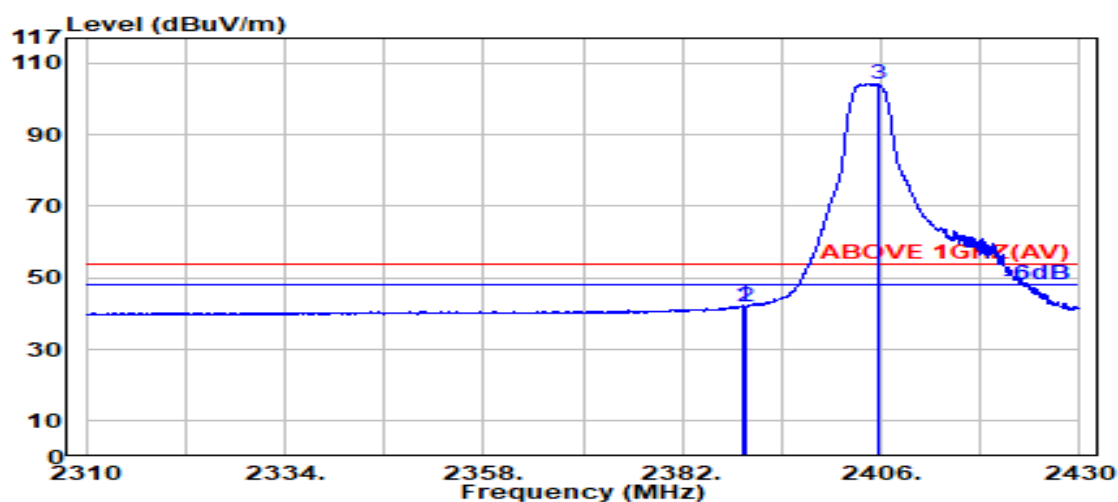

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	42.63	42.35	54.00	11.65	Average
2389.800	28.18	6.03	34.50	42.24	41.96	54.00	12.04	Average
@ 2405.700	28.13	6.06	34.50	104.60	104.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

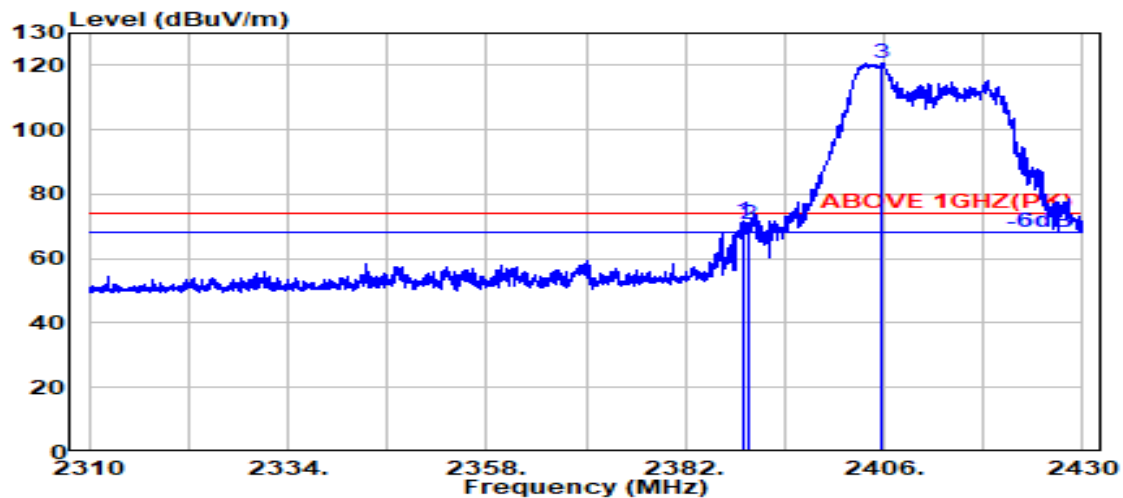

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.50	71.85	71.58	74.00	2.42	Peak
2389.800	28.18	6.03	34.50	70.97	70.69	74.00	3.31	Peak
@ 2405.650	28.13	6.06	34.50	120.99	120.68	---	---	Peak

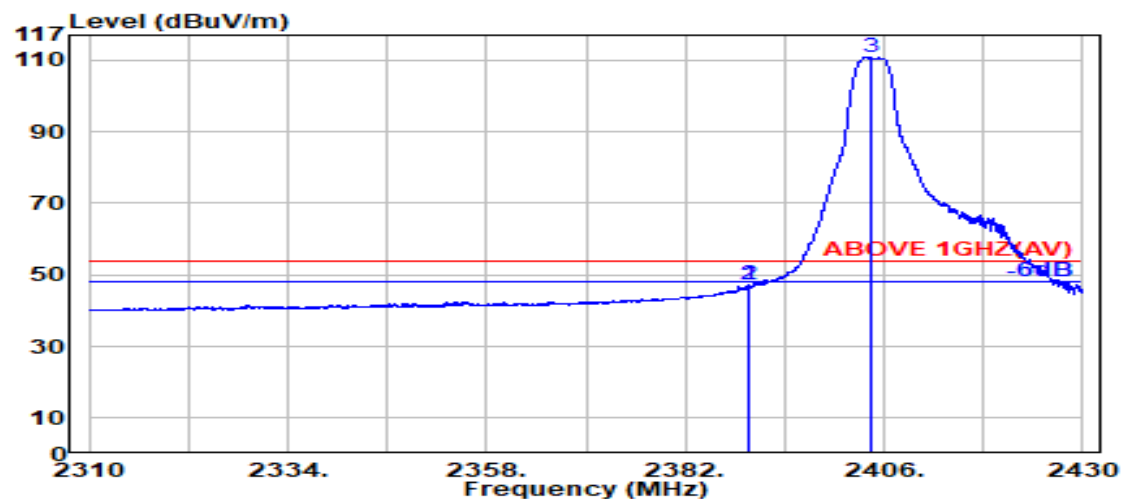

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	47.35	47.07	54.00	6.93	Average
2389.800	28.18	6.03	34.50	47.35	47.06	54.00	6.94	Average
@ 2404.500	28.13	6.06	34.50	111.03	110.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

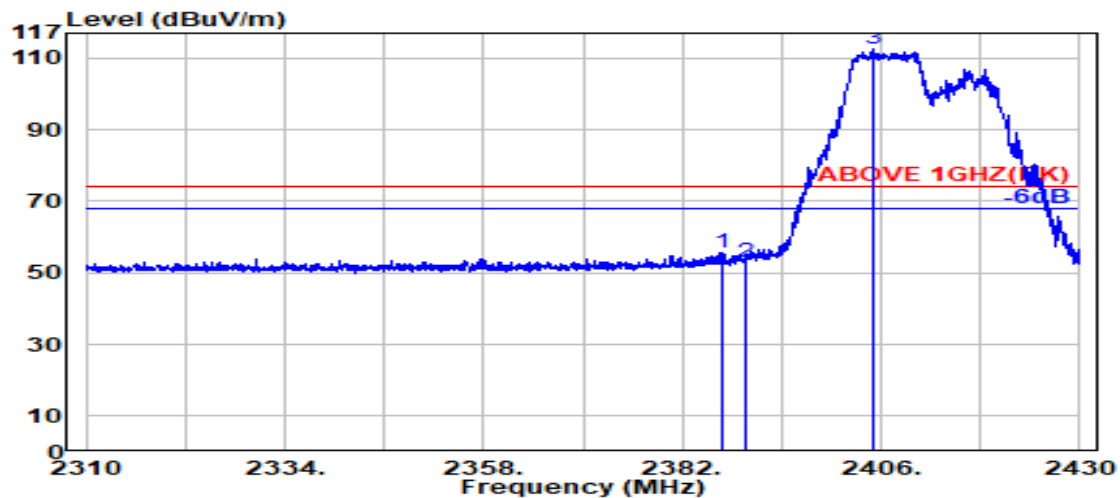

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.700	28.21	6.03	34.50	56.09	55.83	74.00	18.17	Peak
2389.800	28.18	6.03	34.50	53.27	52.99	74.00	21.01	Peak
@ 2405.200	28.13	6.06	34.50	112.77	112.45	---	---	Peak

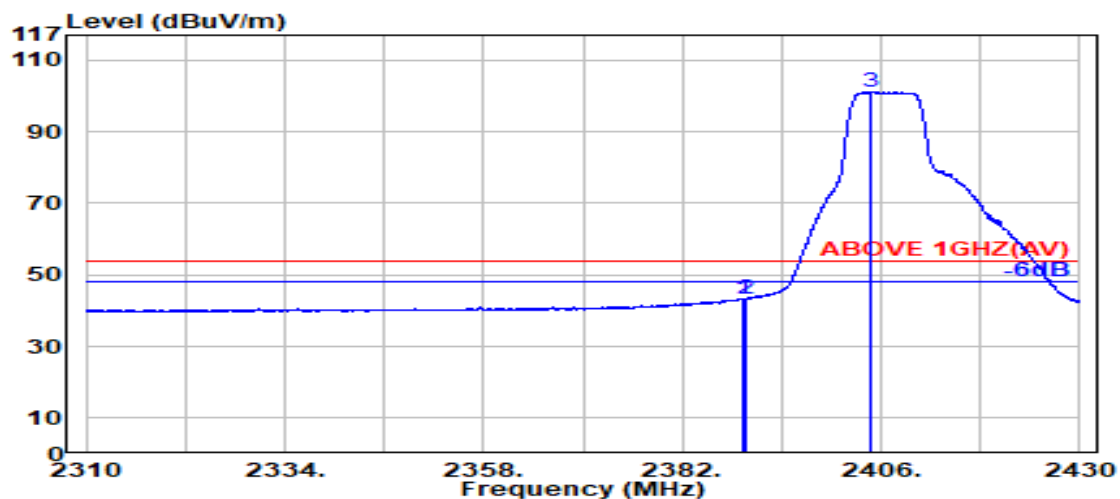

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	43.75	43.47	54.00	10.53	Average
2389.800	28.18	6.03	34.50	43.67	43.39	54.00	10.61	Average
@ 2404.750	28.13	6.06	34.50	101.41	101.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

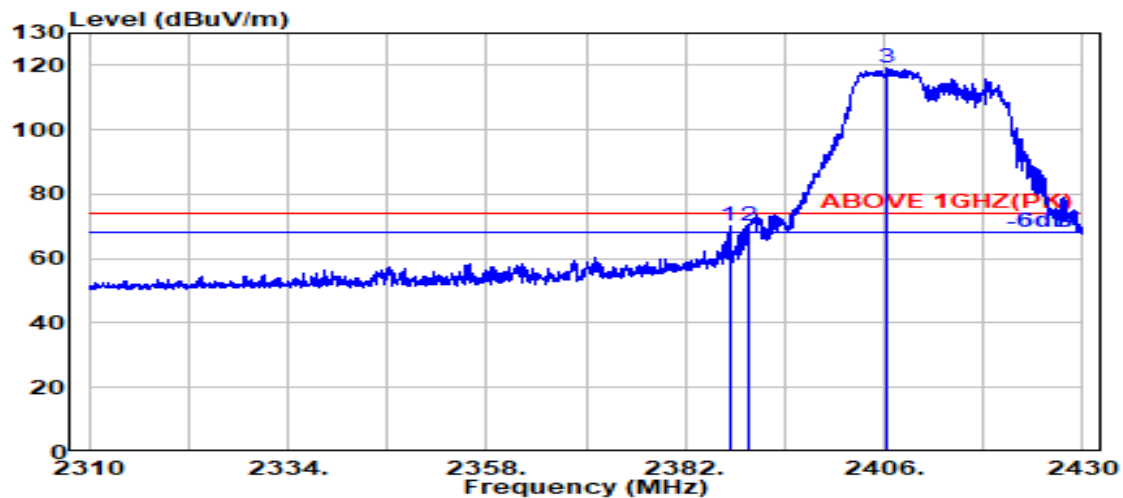

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.300	28.20	6.03	34.50	70.21	69.94	74.00	4.06	Peak
2389.800	28.18	6.03	34.50	70.57	70.29	74.00	3.71	Peak
@ 2406.450	28.14	6.06	34.50	119.33	119.02	---	---	Peak

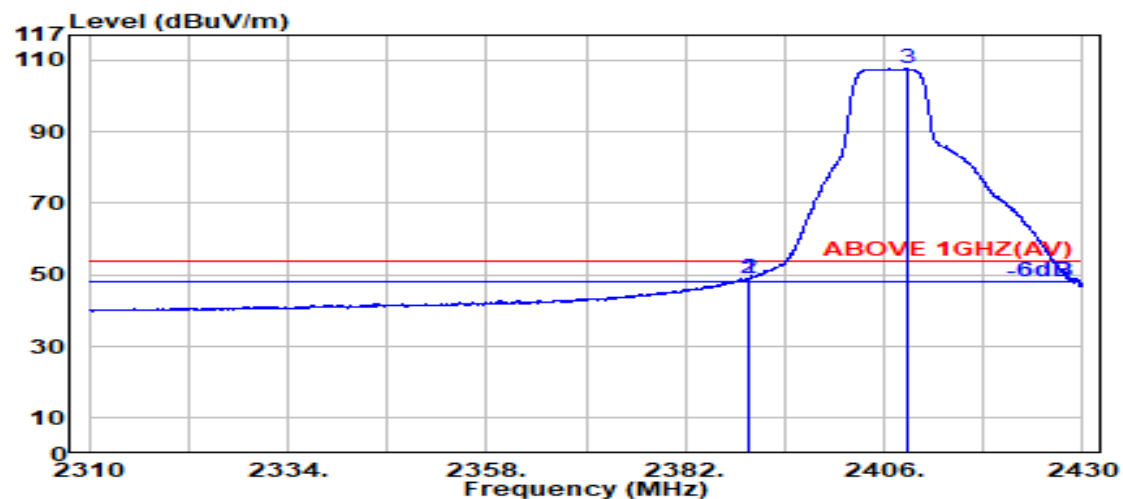

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	49.34	49.06	54.00	4.94	Average
2389.800	28.18	6.03	34.50	49.49	49.21	54.00	4.79	Average
@ 2408.700	28.15	6.06	34.50	107.99	107.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

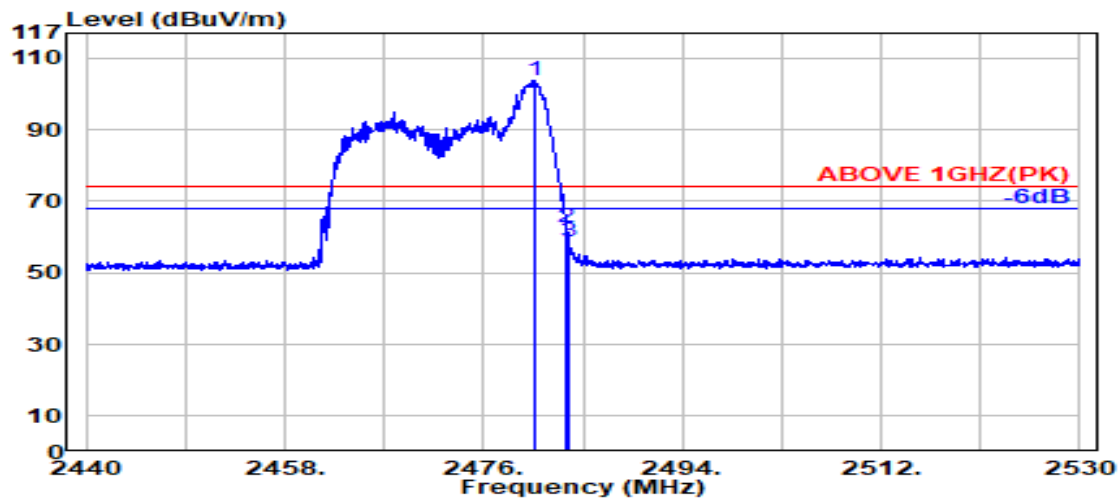

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.650	28.46	6.16	34.52	103.59	103.70	---	---	Peak
2483.500	28.47	6.17	34.52	62.45	62.57	74.00	11.43	Peak
2483.750	28.47	6.17	34.52	58.73	58.85	74.00	15.15	Peak

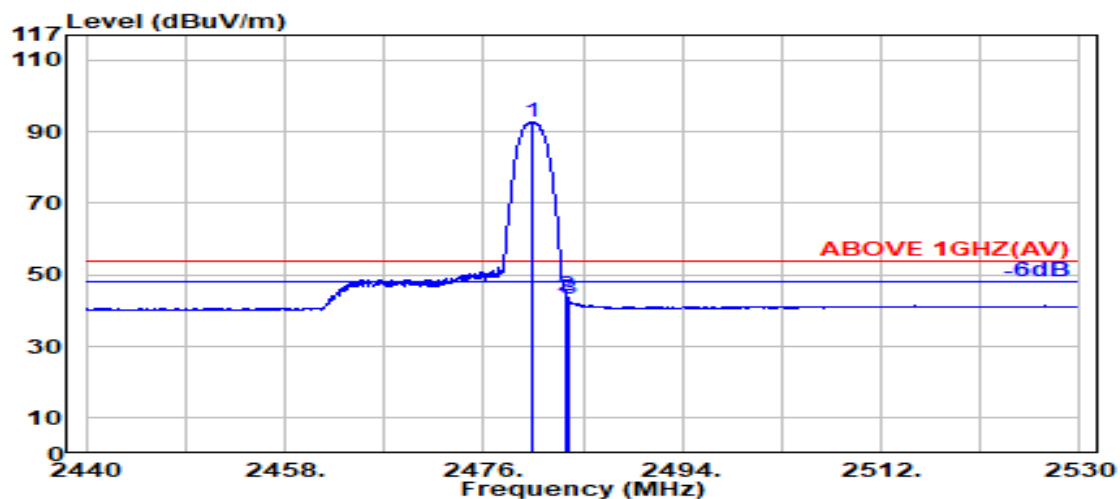

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.400	28.46	6.16	34.52	92.66	92.76	---	---	Average
2483.500	28.47	6.17	34.52	44.01	44.12	54.00	9.88	Average
2483.700	28.47	6.17	34.52	43.05	43.16	54.00	10.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

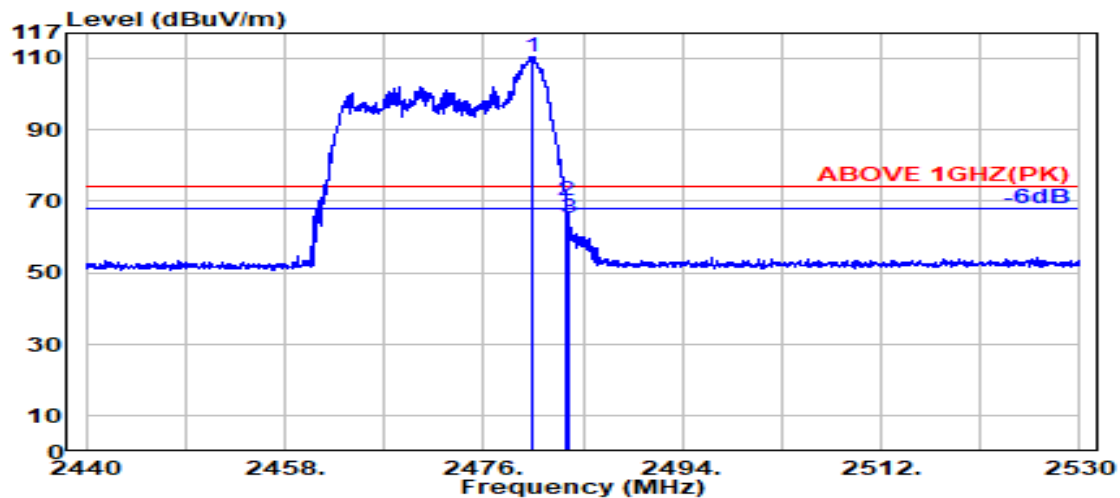

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.450	28.46	6.16	34.52	110.42	110.53	---	---	Peak
2483.500	28.47	6.17	34.52	70.05	70.17	74.00	3.83	Peak
2483.700	28.47	6.17	34.52	65.04	65.15	74.00	8.85	Peak

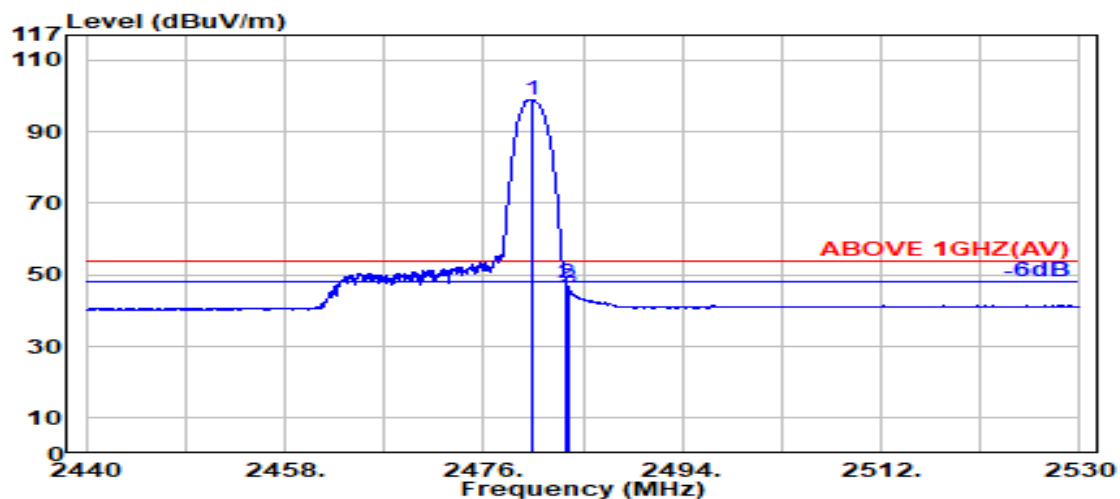

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.300	28.46	6.16	34.52	98.98	99.09	---	---	Average
2483.500	28.47	6.17	34.52	47.51	47.63	54.00	6.37	Average
2483.700	28.47	6.17	34.52	46.31	46.43	54.00	7.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

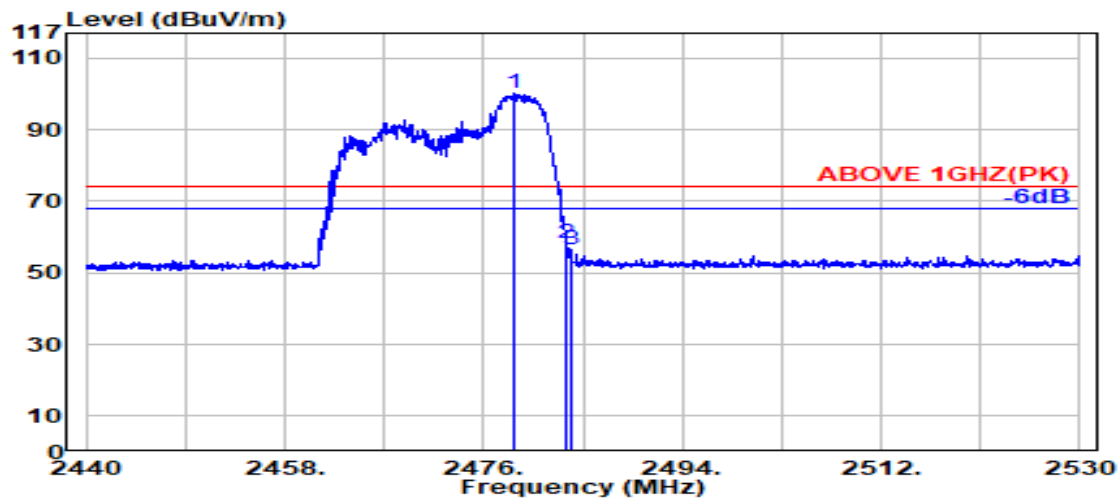

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.750	28.46	6.16	34.52	100.22	100.32	---	---	Peak
2483.500	28.47	6.17	34.52	58.17	58.28	74.00	15.72	Peak
2483.850	28.47	6.17	34.52	56.61	56.72	74.00	17.28	Peak

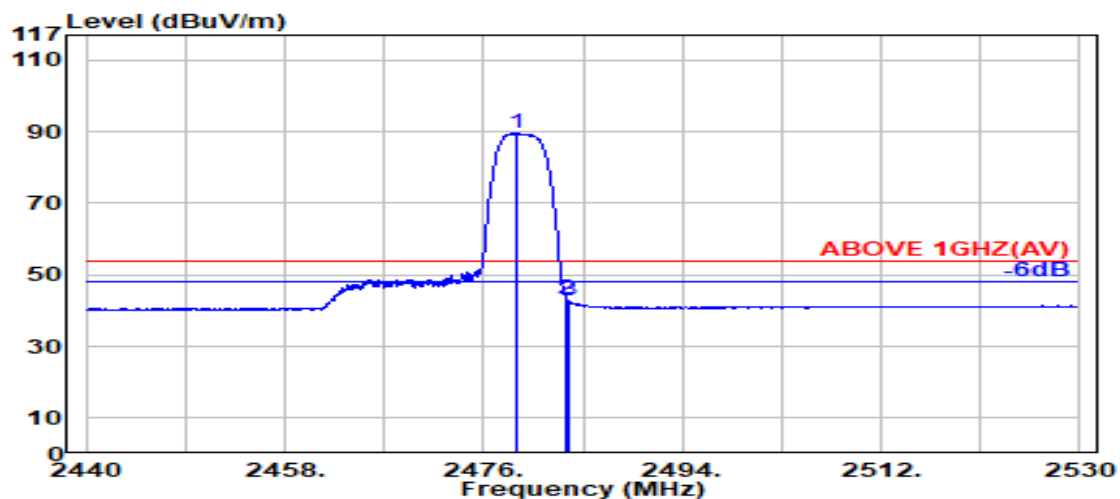

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.100	28.46	6.16	34.52	89.48	89.59	---	---	Average
2483.500	28.47	6.17	34.52	43.00	43.12	54.00	10.88	Average
2483.700	28.47	6.17	34.52	42.85	42.97	54.00	11.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

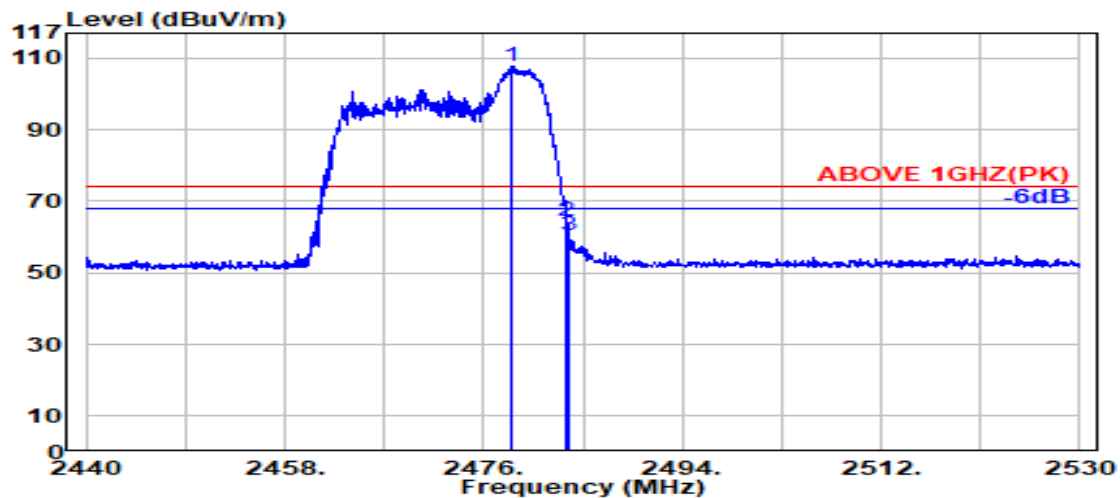

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.600	28.46	6.16	34.52	107.75	107.85	---	---	Peak
2483.500	28.47	6.17	34.52	64.56	64.68	74.00	9.32	Peak
2483.700	28.47	6.17	34.52	60.28	60.40	74.00	13.60	Peak

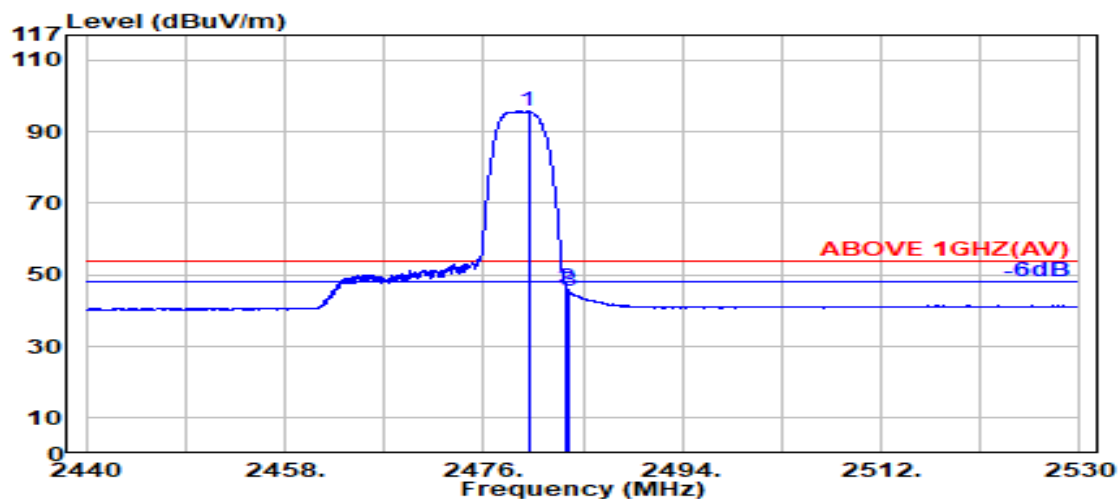

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.52	95.69	95.79	---	---	Average
2483.500	28.47	6.17	34.52	46.43	46.55	54.00	7.45	Average
2483.700	28.47	6.17	34.52	45.48	45.60	54.00	8.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

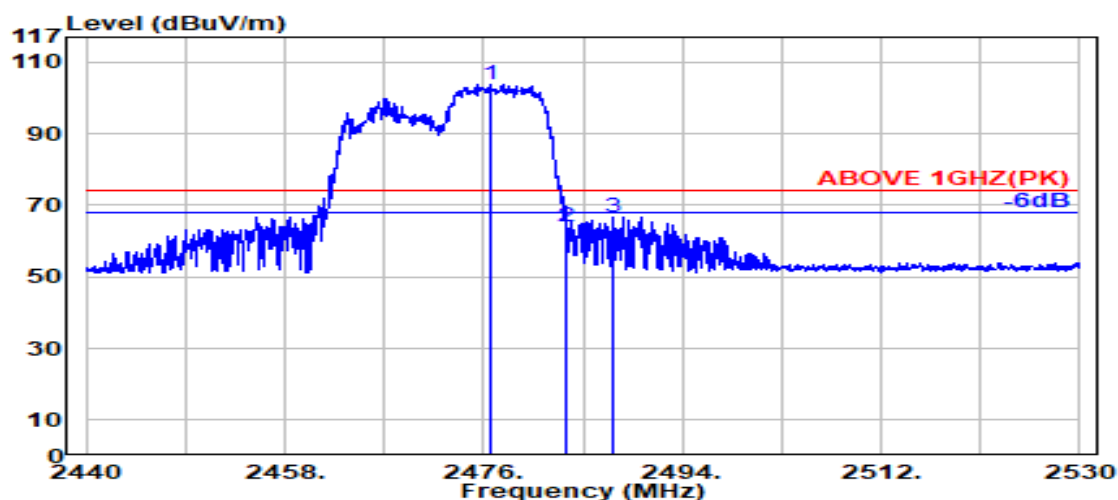

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.600	28.45	6.16	34.52	103.60	103.69	---	---	Peak
2483.500	28.47	6.17	34.52	64.05	64.17	74.00	9.83	Peak
2487.800	28.48	6.17	34.52	66.46	66.59	74.00	7.41	Peak

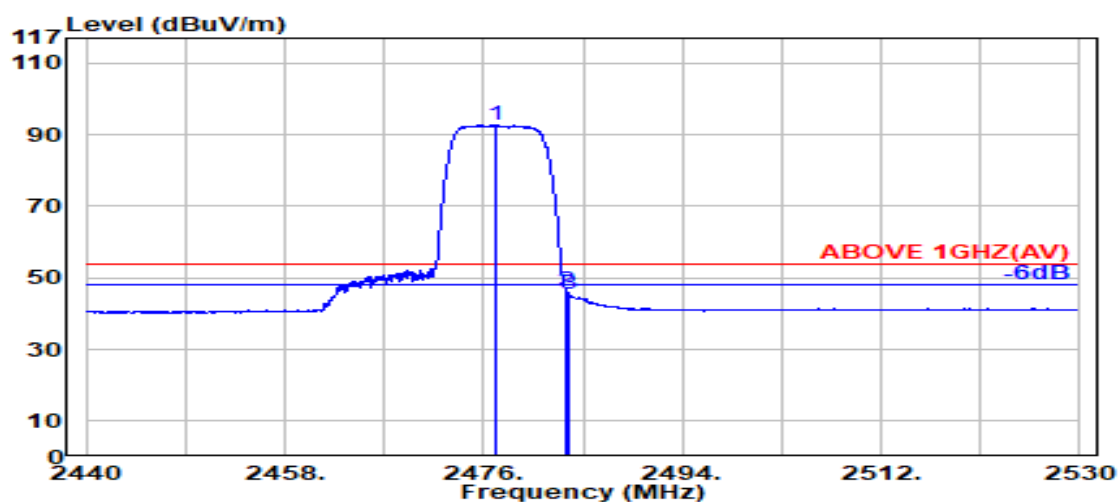

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.150	28.45	6.16	34.52	92.73	92.83	---	---	Average
2483.500	28.47	6.17	34.52	46.15	46.27	54.00	7.73	Average
2483.700	28.47	6.17	34.52	45.26	45.38	54.00	8.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

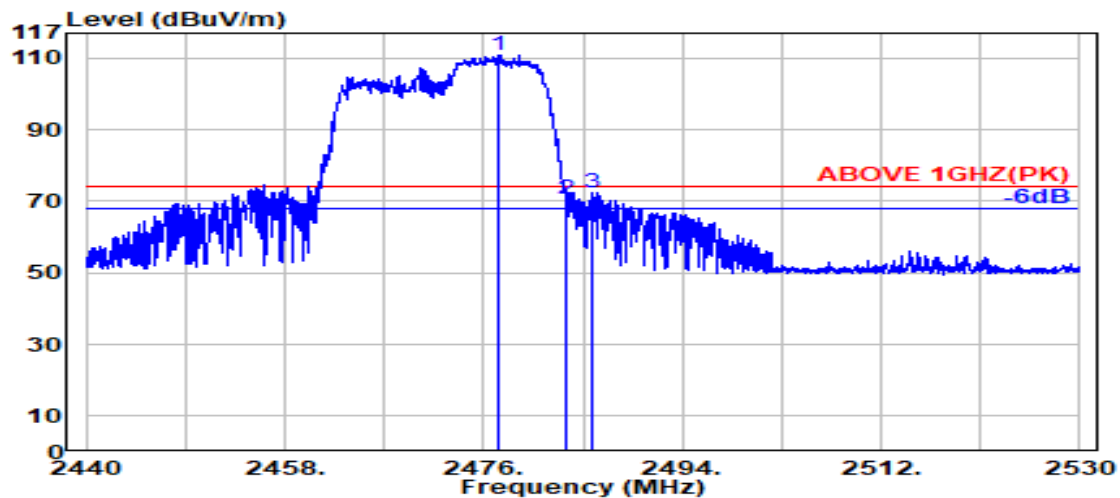

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.450	28.46	6.16	34.52	110.79	110.88	---	---	Peak
2483.500	28.47	6.17	34.52	70.46	70.58	74.00	3.42	Peak
2485.850	28.47	6.17	34.52	72.24	72.36	74.00	1.64	Peak

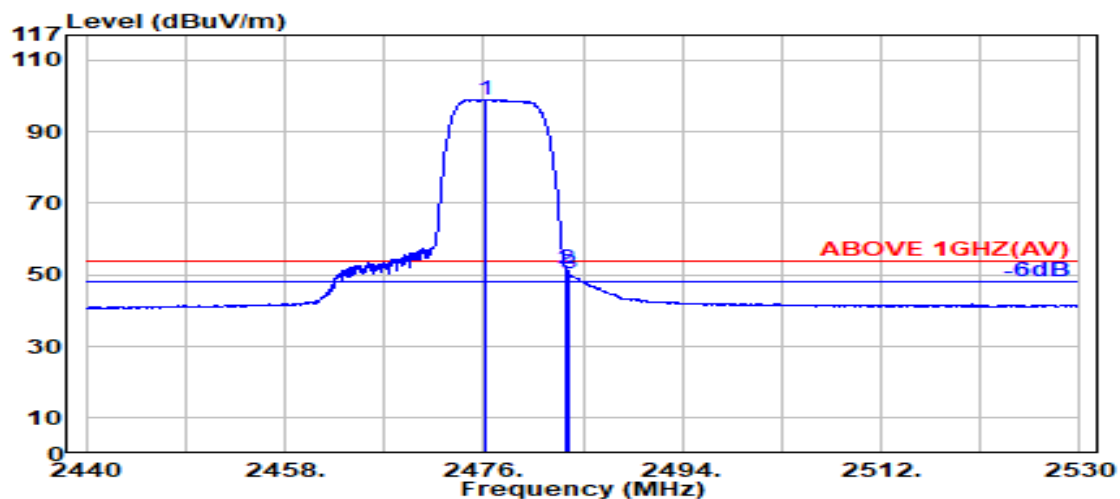

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.150	28.45	6.16	34.52	98.88	98.98	---	---	Average
2483.500	28.47	6.17	34.52	51.36	51.48	54.00	2.52	Average
2483.700	28.47	6.17	34.52	50.40	50.52	54.00	3.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

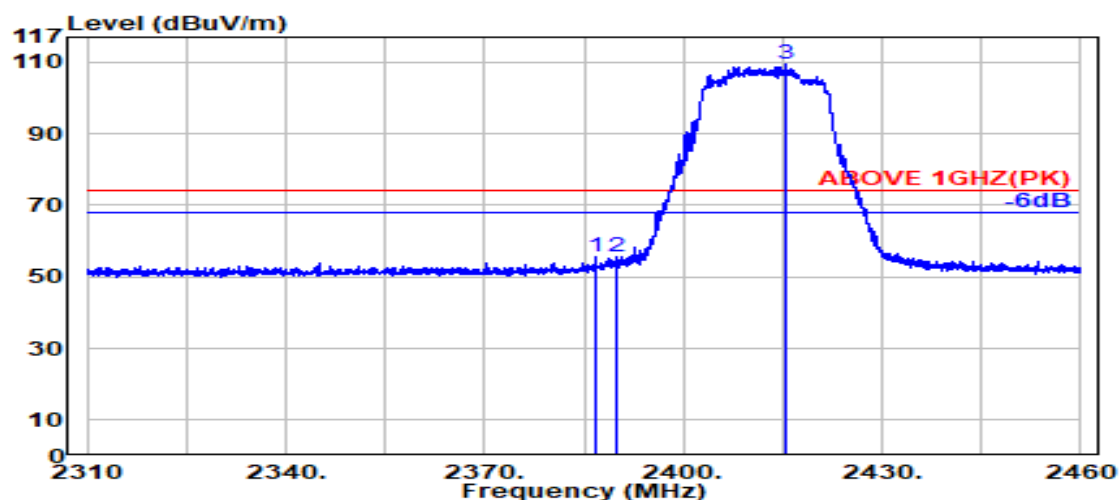

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.600	28.21	6.03	34.50	55.74	55.48	74.00	18.52	Peak
2389.800	28.18	6.03	34.50	56.03	55.75	74.00	18.25	Peak
@ 2415.350	28.19	6.07	34.50	109.80	109.56	---	---	Peak

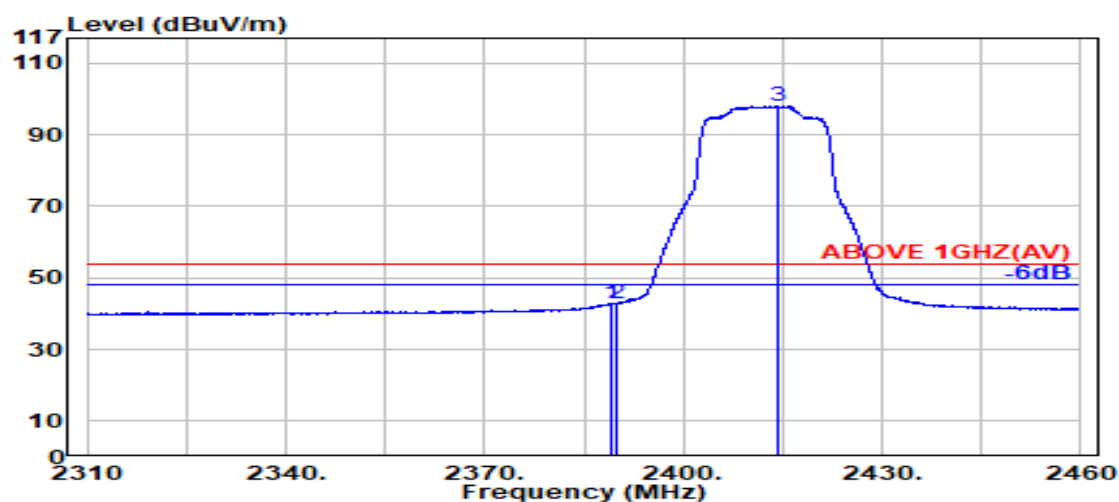

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.19	6.03	34.50	43.26	42.98	54.00	11.02	Average
2389.800	28.18	6.03	34.50	43.06	42.77	54.00	11.23	Average
@ 2414.100	28.19	6.07	34.50	98.18	97.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

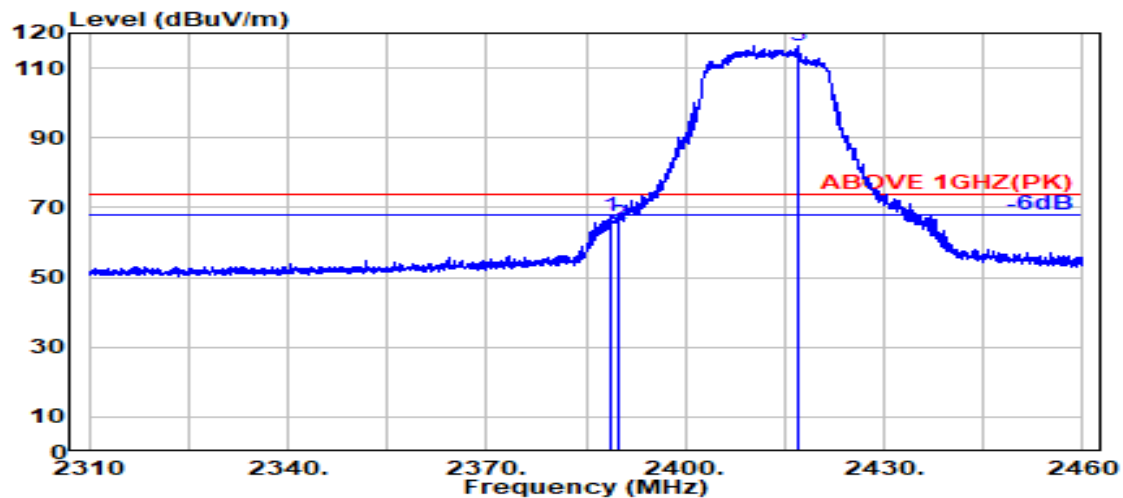

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.750	28.19	6.03	34.50	67.94	67.66	74.00	6.34	Peak
2389.800	28.18	6.03	34.50	65.62	65.34	74.00	8.66	Peak
@ 2417.050	28.20	6.07	34.50	116.49	116.27	---	---	Peak

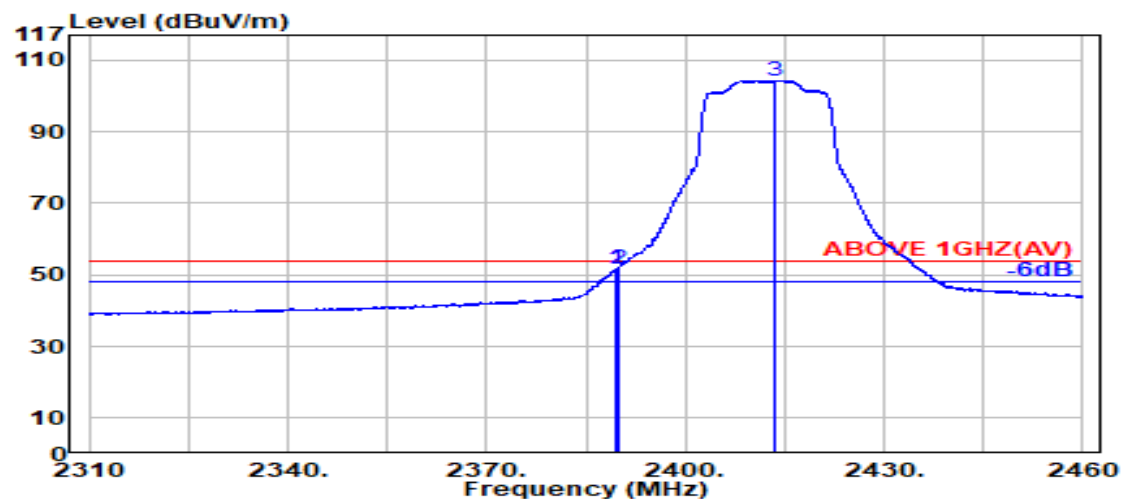

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	51.86	51.58	54.00	2.42	Average
2389.800	28.18	6.03	34.50	51.75	51.47	54.00	2.53	Average
@ 2413.350	28.18	6.07	34.50	104.61	104.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

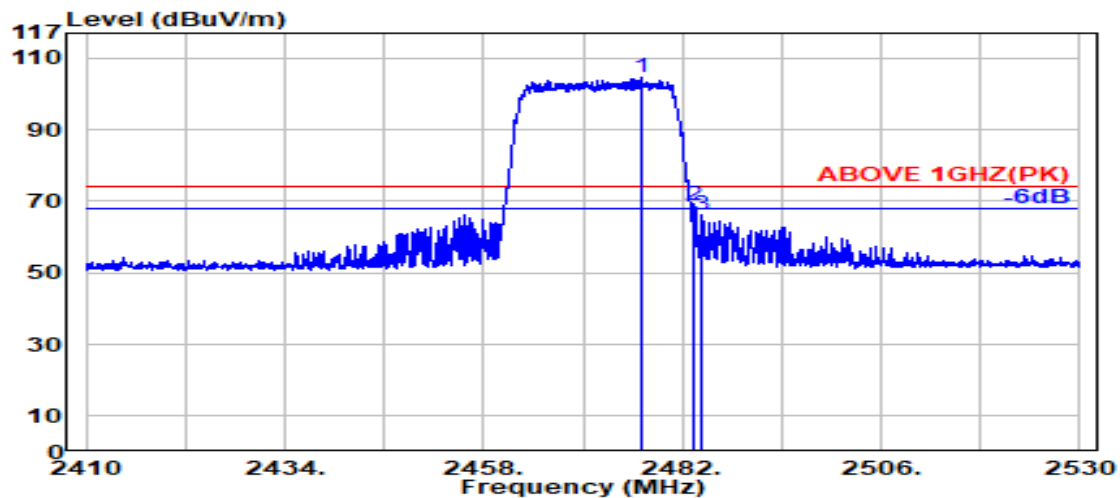

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2477.150	28.45	6.16	34.52	104.58	104.68	---	---	Peak
	2483.500	28.47	6.17	34.52	68.89	69.01	74.00	4.99	Peak
	2484.200	28.47	6.17	34.52	65.90	66.02	74.00	7.98	Peak

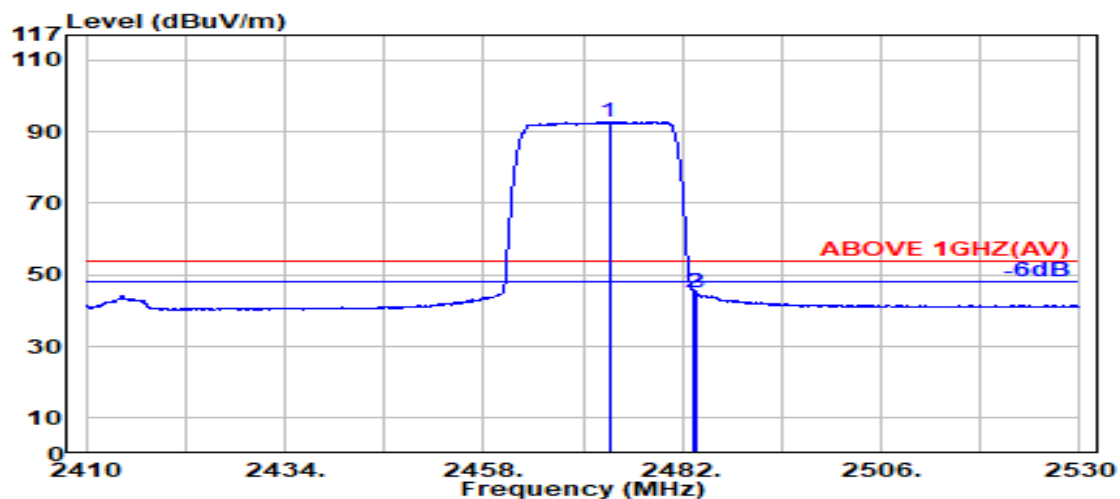

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.150	28.45	6.15	34.51	92.73	92.81	---	---	Average
	2483.500	28.47	6.17	34.52	45.07	45.19	54.00	8.81	Average
	2483.700	28.47	6.17	34.52	45.10	45.22	54.00	8.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

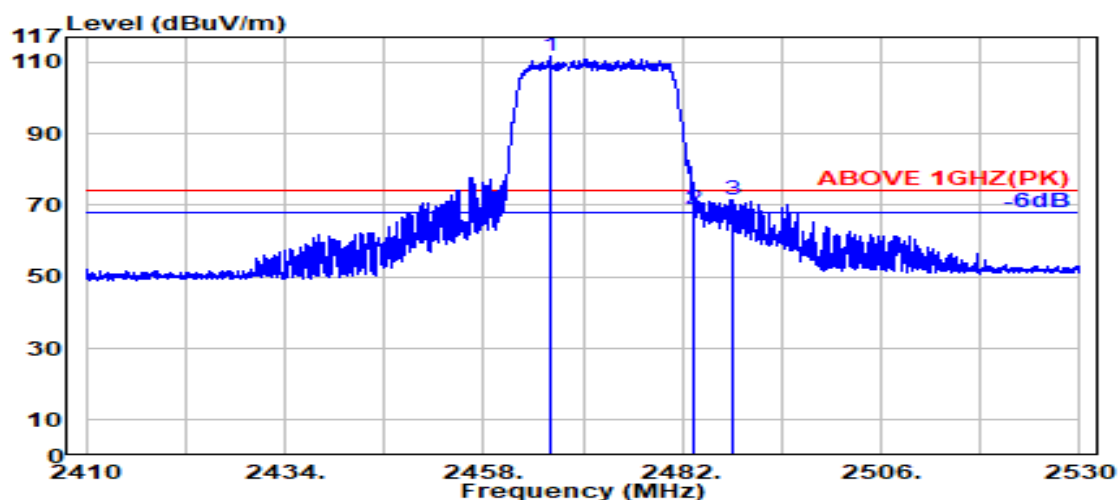

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	28.43	6.14	34.51	111.81	111.87	---	---	Peak
2483.500	28.47	6.17	34.52	68.55	68.66	74.00	5.34	Peak
2488.000	28.48	6.17	34.52	71.51	71.65	74.00	2.35	Peak

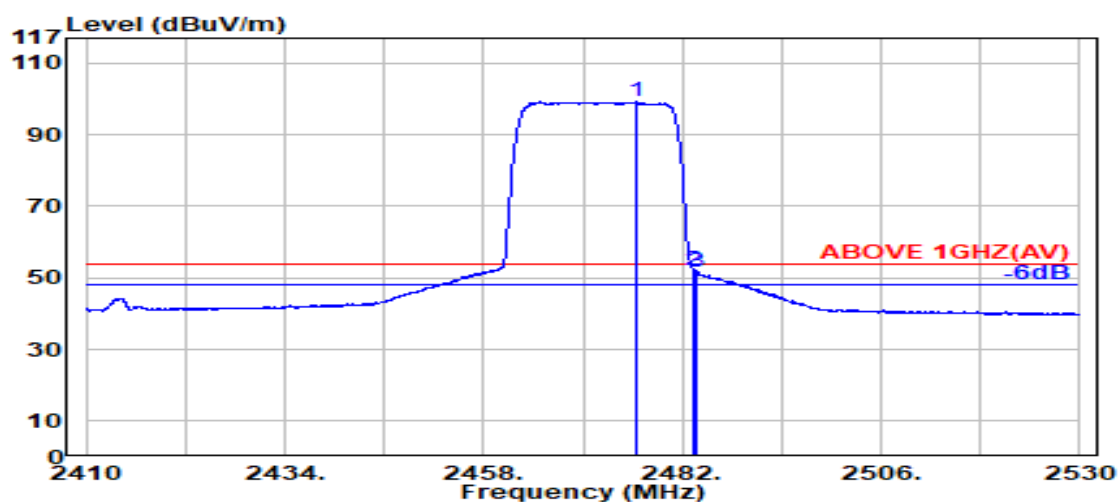

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.500	28.45	6.16	34.52	99.06	99.15	---	---	Average
2483.500	28.47	6.17	34.52	52.06	52.18	54.00	1.82	Average
2483.700	28.47	6.17	34.52	51.63	51.74	54.00	2.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

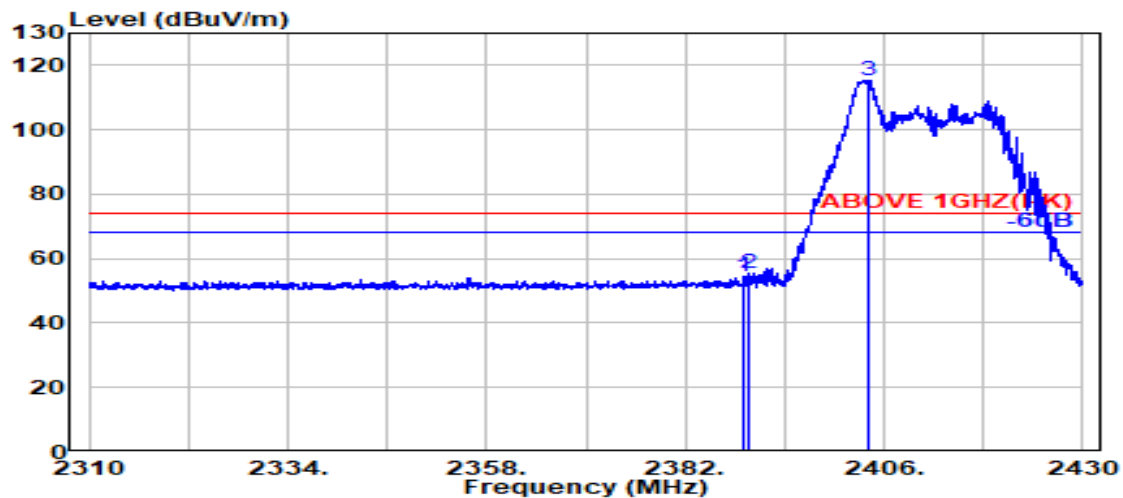

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.19	6.03	34.50	54.88	54.60	74.00	19.40	Peak
2389.800	28.18	6.03	34.50	55.49	55.20	74.00	18.80	Peak
@ 2404.250	28.13	6.06	34.50	115.72	115.40	---	---	Peak

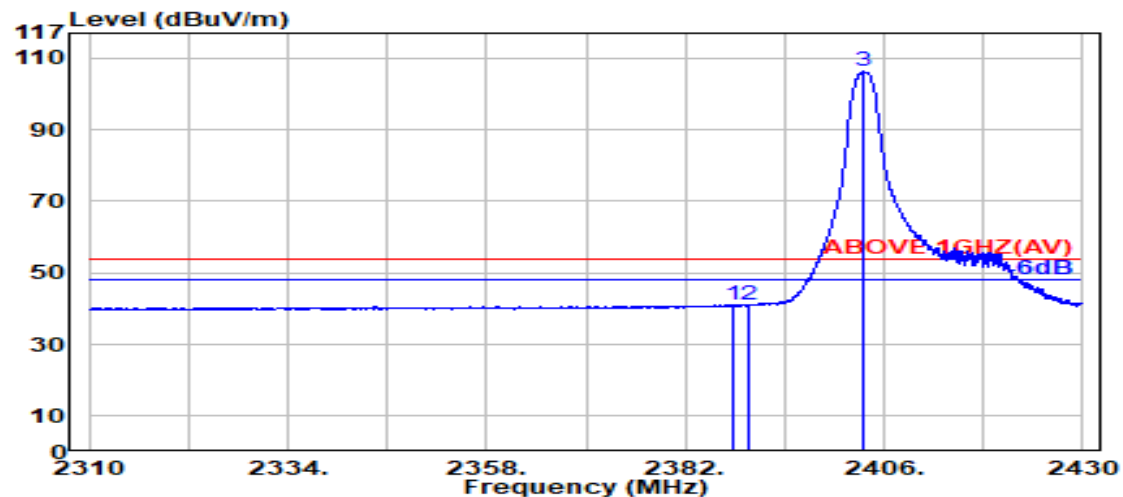

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.750	28.20	6.03	34.50	41.34	41.08	54.00	12.92	Average
2389.800	28.18	6.03	34.50	41.21	40.93	54.00	13.07	Average
@ 2403.600	28.12	6.05	34.50	106.54	106.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

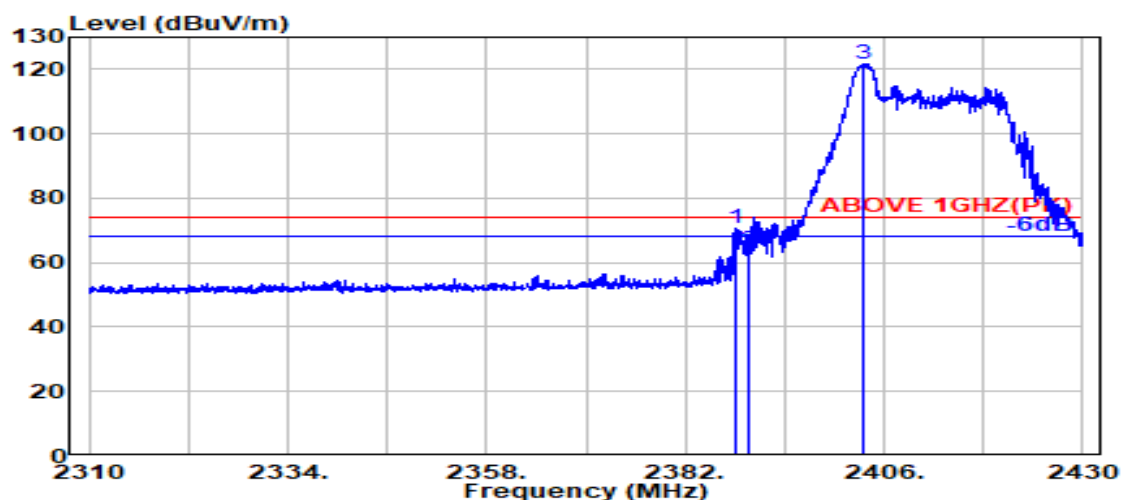

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	6.03	34.50	70.80	70.53	74.00	3.47	Peak
2389.800	28.18	6.03	34.50	63.88	63.60	74.00	10.40	Peak
@ 2403.500	28.12	6.05	34.50	122.05	121.73	---	---	Peak

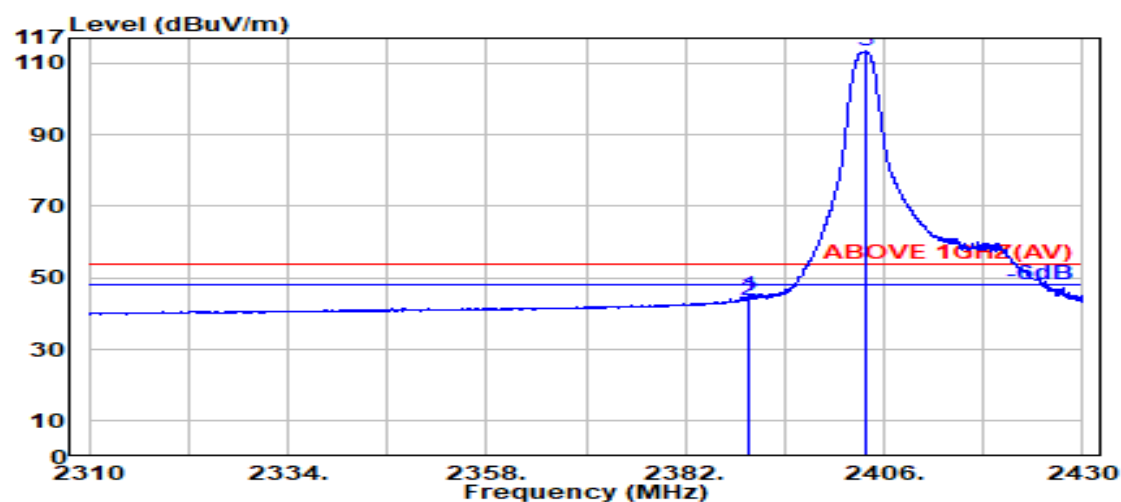

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	45.35	45.07	54.00	8.93	Average
2389.800	28.18	6.03	34.50	44.21	43.92	54.00	10.08	Average
@ 2403.700	28.12	6.05	34.50	113.60	113.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

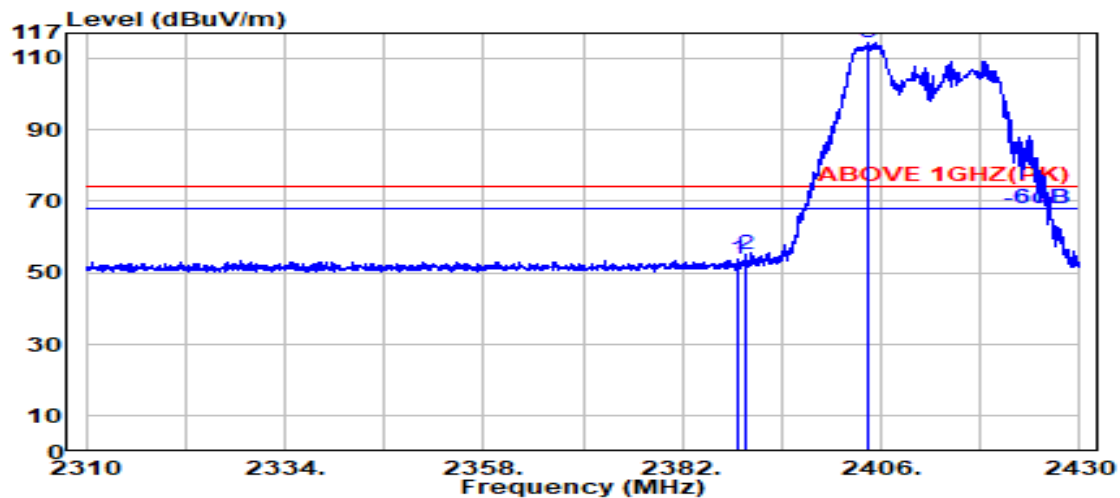

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.50	53.97	53.70	74.00	20.30	Peak
2389.800	28.18	6.03	34.50	55.50	55.21	74.00	18.79	Peak
@ 2404.400	28.13	6.06	34.50	114.51	114.19	---	---	Peak

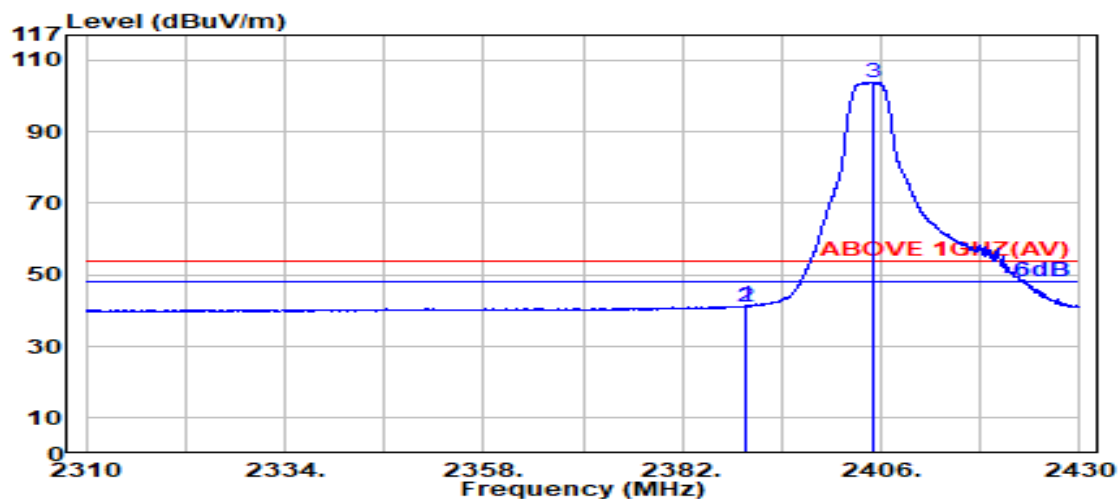

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	41.75	41.46	54.00	12.54	Average
2389.800	28.18	6.03	34.50	41.50	41.21	54.00	12.79	Average
@ 2405.200	28.13	6.06	34.50	104.12	103.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

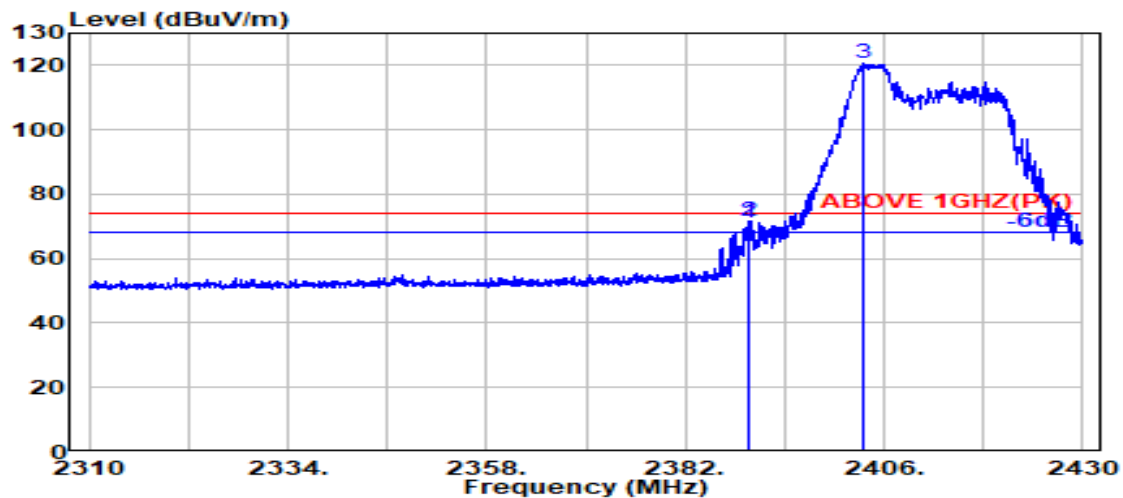

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	71.33	71.05	74.00	2.95	Peak
2389.800	28.18	6.03	34.50	72.12	71.83	74.00	2.17	Peak
@ 2403.600	28.12	6.05	34.50	120.90	120.58	---	---	Peak

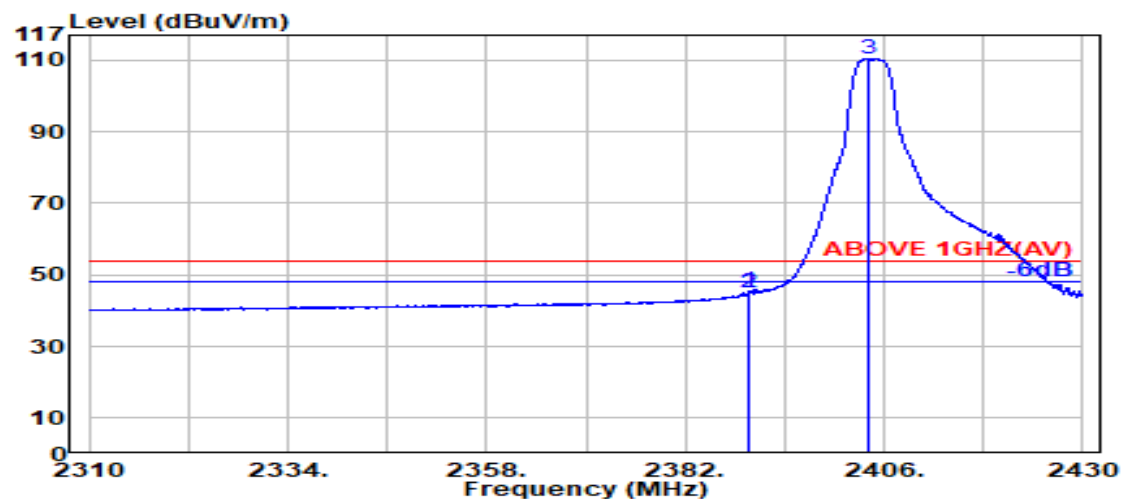

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	45.65	45.37	54.00	8.63	Average
2389.800	28.18	6.03	34.50	45.34	45.06	54.00	8.94	Average
@ 2404.200	28.13	6.06	34.50	110.85	110.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

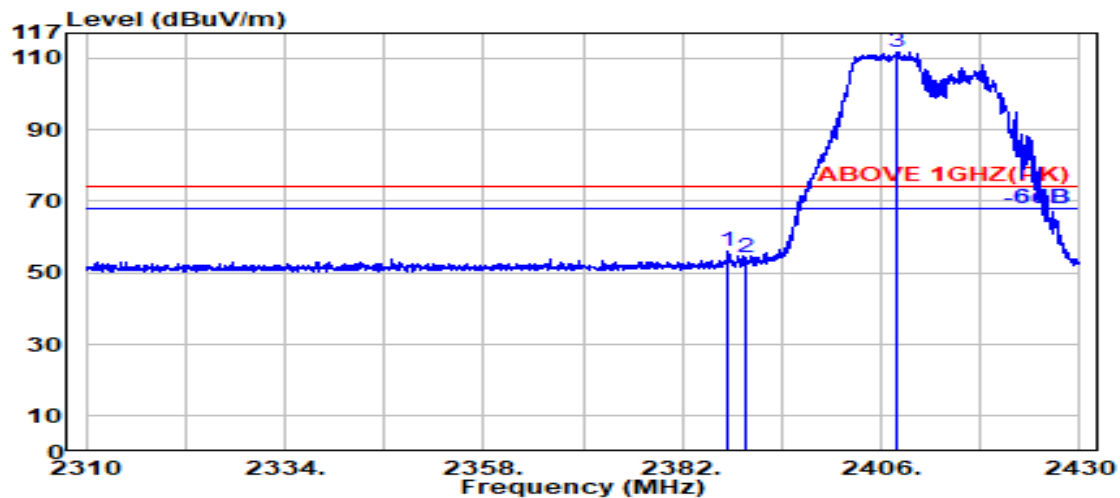

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.600	28.20	6.03	34.50	56.19	55.93	74.00	18.07	Peak
2389.800	28.18	6.03	34.50	54.38	54.10	74.00	19.90	Peak
@ 2407.950	28.15	6.06	34.50	112.10	111.81	---	---	Peak

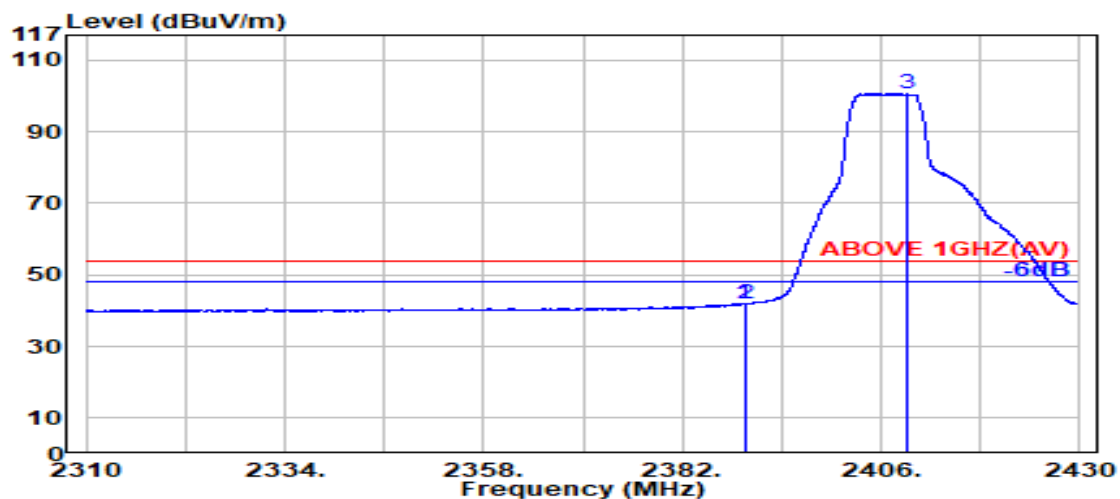

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	42.27	41.98	54.00	12.02	Average
2389.800	28.18	6.03	34.50	42.34	42.06	54.00	11.94	Average
@ 2409.100	28.16	6.06	34.50	101.01	100.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

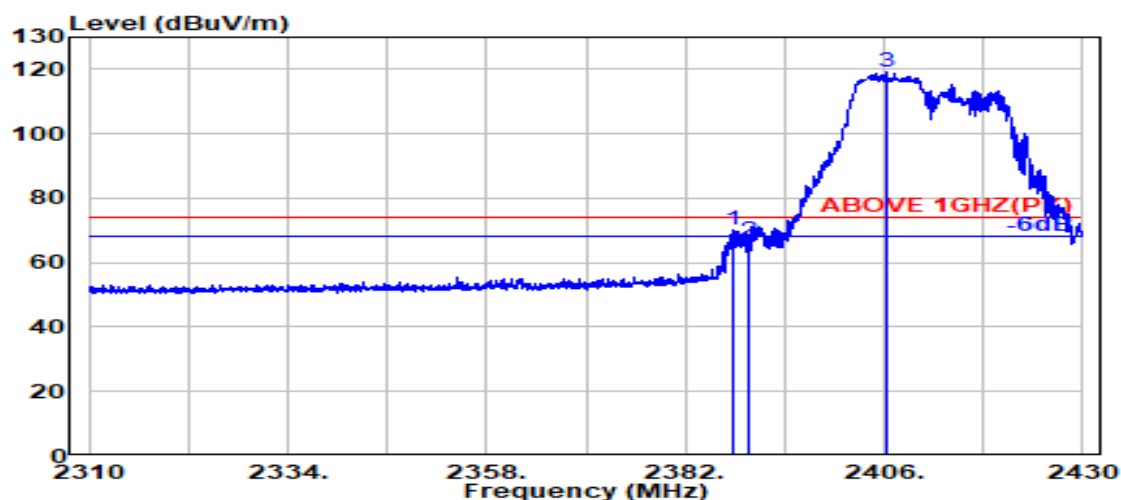

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.900	28.20	6.03	34.50	70.45	70.18	74.00	3.82	Peak
2389.800	28.18	6.03	34.50	66.99	66.71	74.00	7.29	Peak
@ 2406.300	28.14	6.06	34.50	119.68	119.37	---	---	Peak

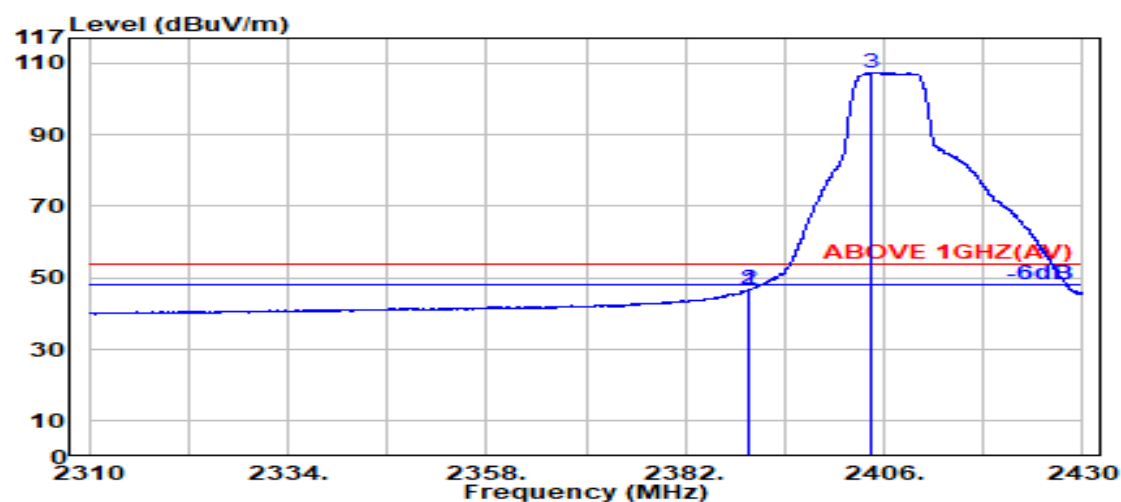

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	46.82	46.54	54.00	7.46	Average
2389.800	28.18	6.03	34.50	46.97	46.69	54.00	7.31	Average
@ 2404.450	28.13	6.06	34.50	107.68	107.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

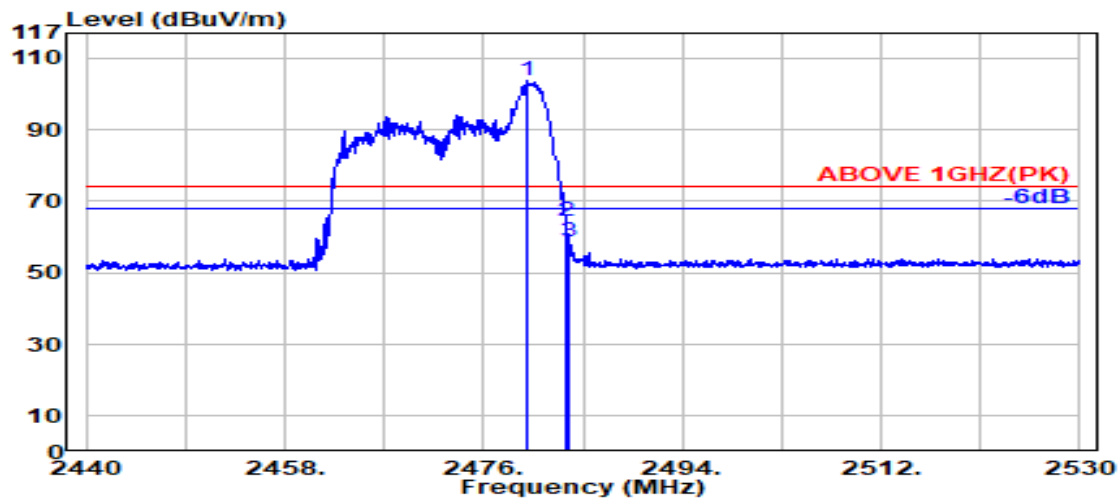

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	34.52	103.62	103.72	---	---	Peak
2483.500	28.47	6.17	34.52	64.19	64.30	74.00	9.70	Peak
2483.700	28.47	6.17	34.52	58.46	58.58	74.00	15.42	Peak

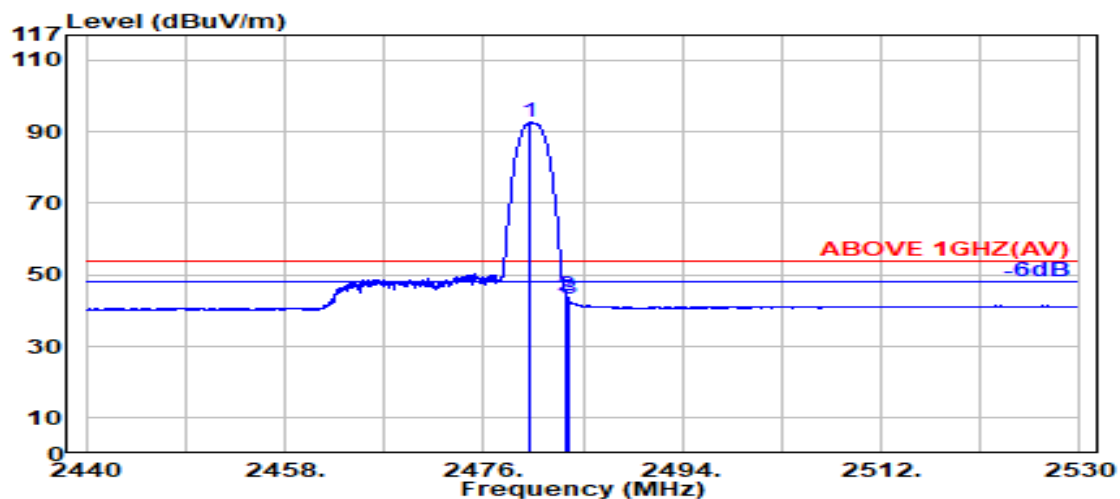

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.250	28.46	6.16	34.52	92.55	92.66	---	---	Average
2483.500	28.47	6.17	34.52	44.01	44.13	54.00	9.87	Average
2483.700	28.47	6.17	34.52	43.00	43.12	54.00	10.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

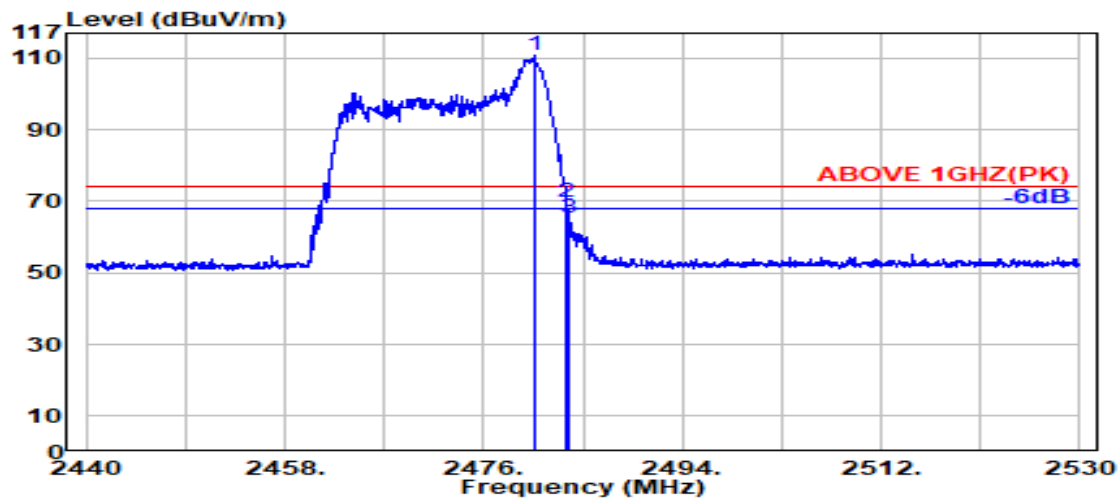

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.650	28.46	6.16	34.52	110.59	110.70	---	---	Peak
2483.500	28.47	6.17	34.52	69.80	69.92	74.00	4.08	Peak
2483.700	28.47	6.17	34.52	65.40	65.52	74.00	8.48	Peak

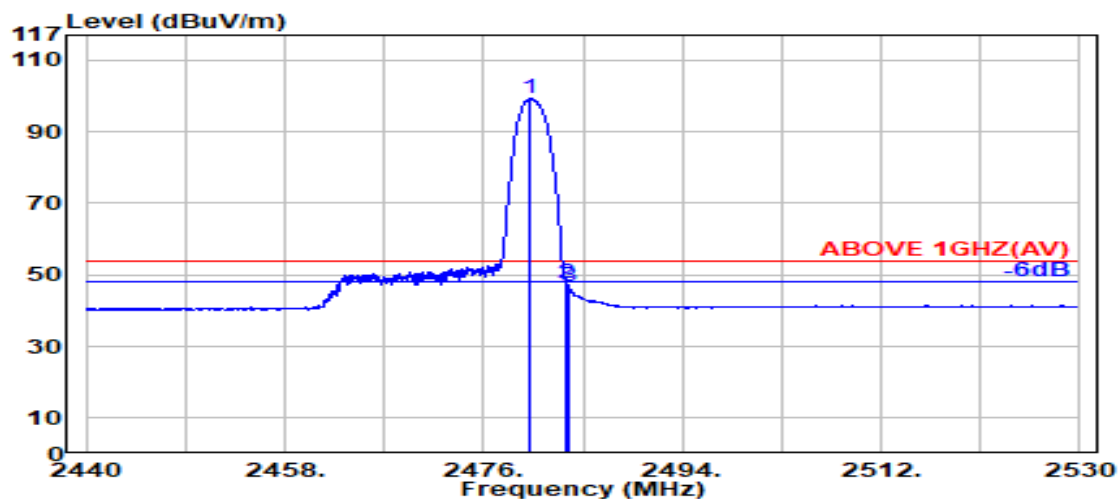

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	34.52	99.19	99.30	---	---	Average
2483.500	28.47	6.17	34.52	47.59	47.71	54.00	6.29	Average
2483.700	28.47	6.17	34.52	46.51	46.63	54.00	7.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

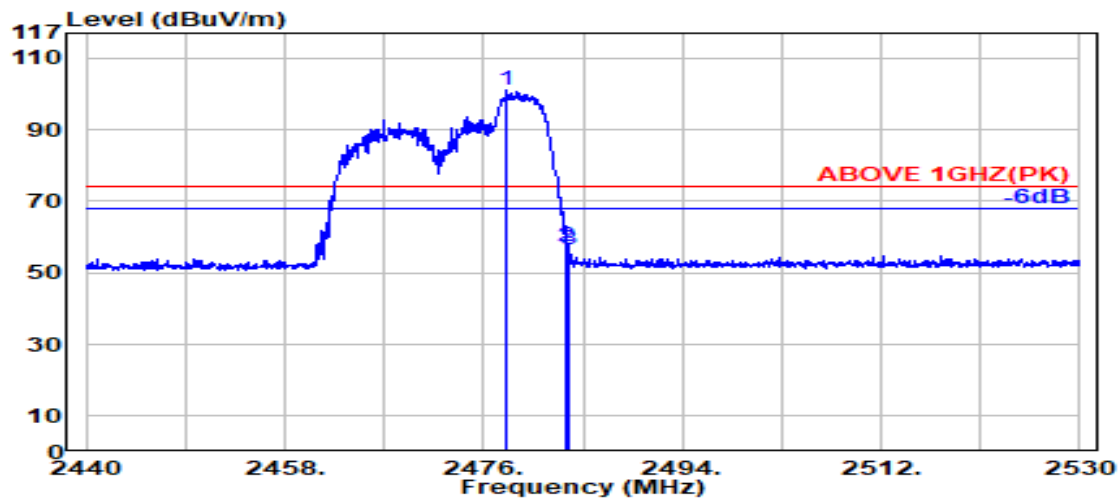

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.150	28.46	6.16	34.52	101.09	101.19	---	---	Peak
2483.500	28.47	6.17	34.52	57.36	57.48	74.00	16.52	Peak
2483.750	28.47	6.17	34.52	56.43	56.55	74.00	17.45	Peak

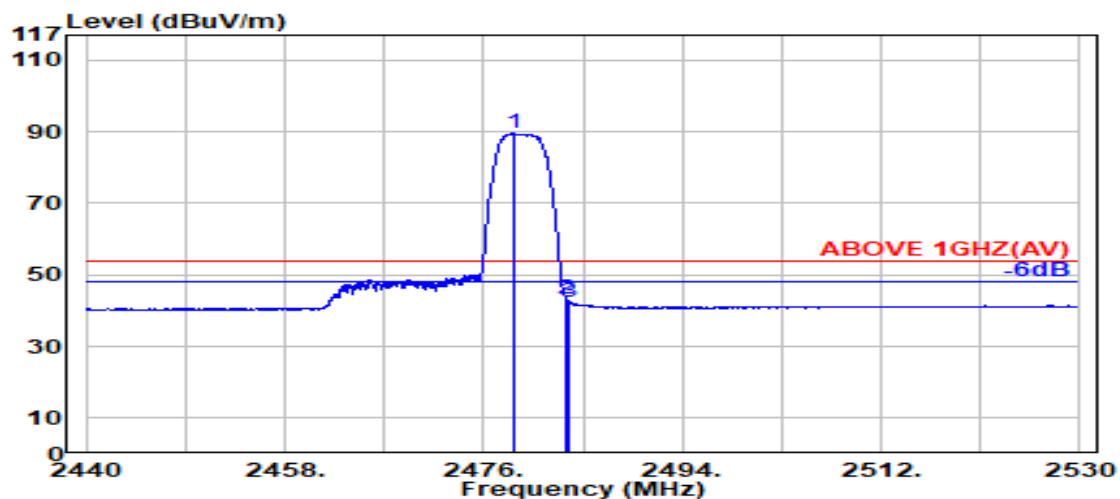

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.750	28.46	6.16	34.52	89.34	89.45	---	---	Average
2483.500	28.47	6.17	34.52	43.08	43.20	54.00	10.80	Average
2483.700	28.47	6.17	34.52	42.46	42.58	54.00	11.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

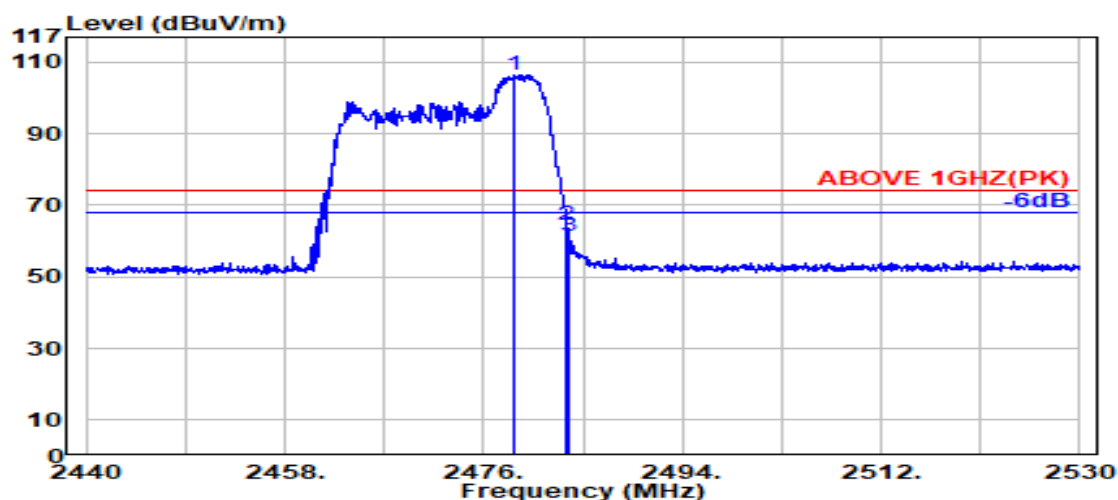

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.700	28.46	6.16	34.52	106.46	106.56	---	---	Peak
2483.500	28.47	6.17	34.52	64.13	64.25	74.00	9.75	Peak
2483.750	28.47	6.17	34.52	61.32	61.44	74.00	12.56	Peak

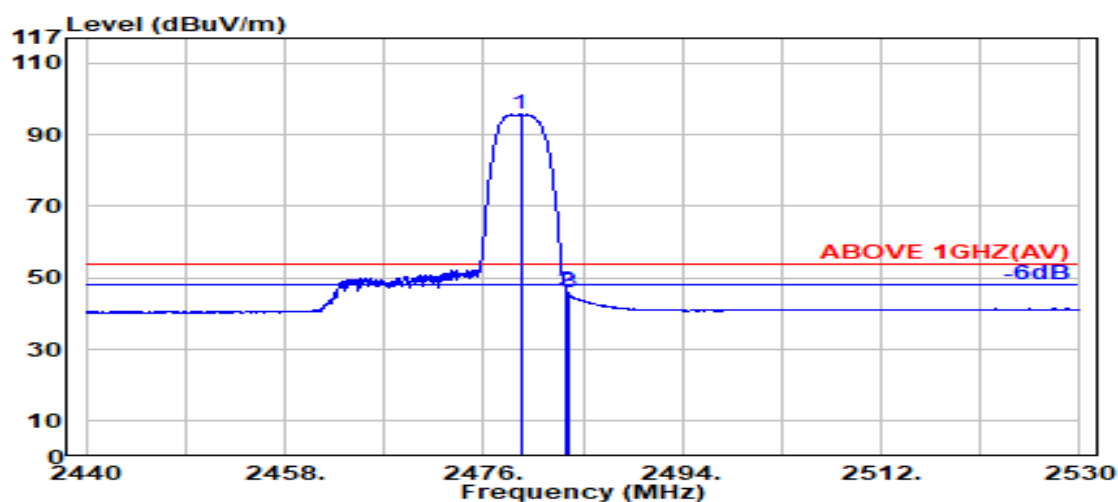

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.350	28.46	6.16	34.52	95.60	95.70	---	---	Average
2483.500	28.47	6.17	34.52	46.41	46.53	54.00	7.47	Average
2483.700	28.47	6.17	34.52	45.62	45.74	54.00	8.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

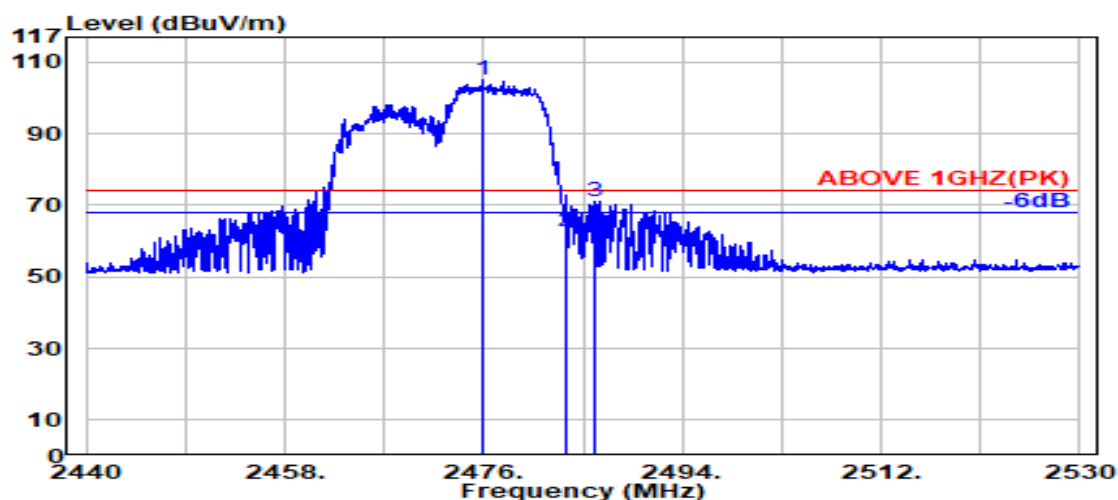

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.900	28.45	6.16	34.52	104.97	105.07	---	---	Peak
2483.500	28.47	6.17	34.52	62.41	62.53	74.00	11.47	Peak
2486.100	28.47	6.17	34.52	71.00	71.12	74.00	2.88	Peak

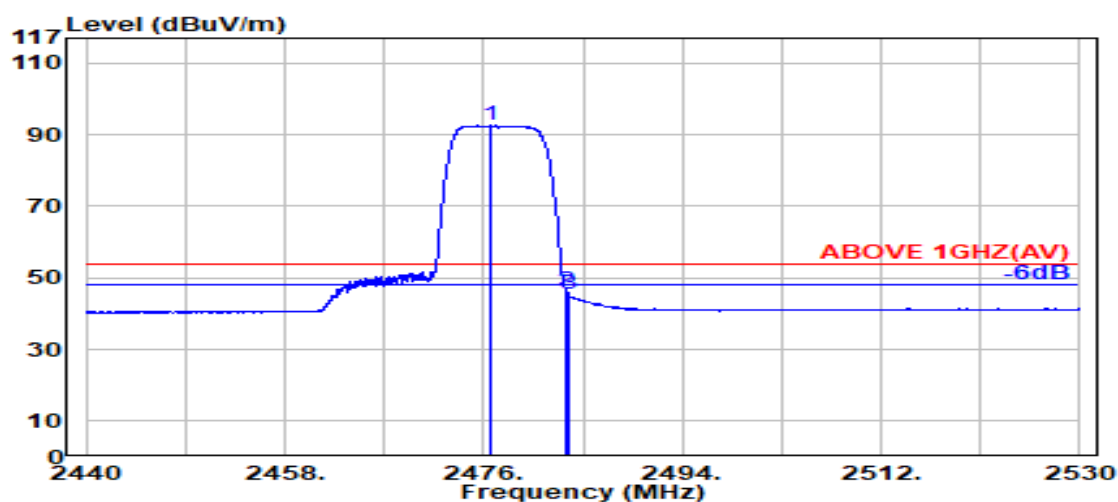

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	28.45	6.16	34.52	92.56	92.66	---	---	Average
2483.500	28.47	6.17	34.52	46.17	46.29	54.00	7.71	Average
2483.700	28.47	6.17	34.52	45.24	45.36	54.00	8.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

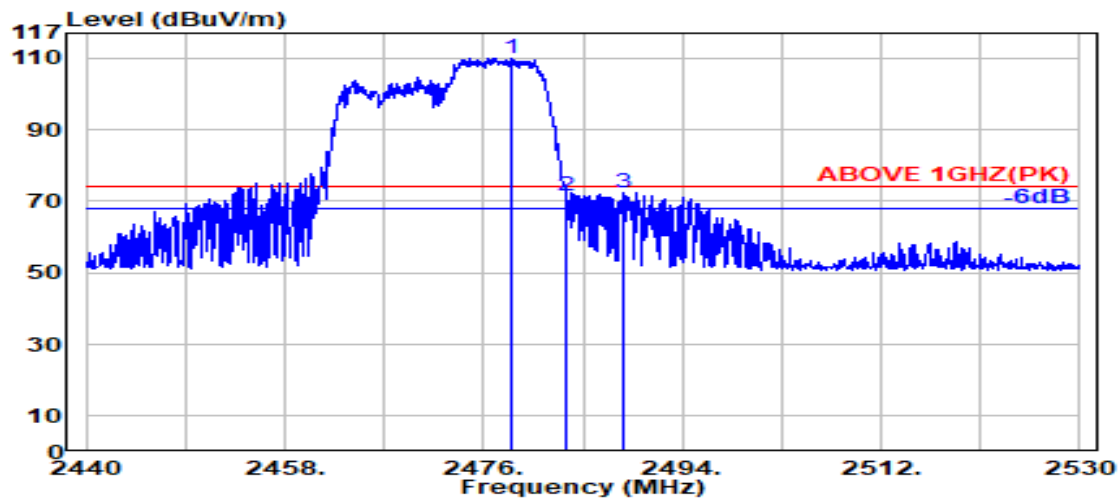

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.600	28.46	6.16	34.52	110.00	110.10	---	---	Peak
2483.500	28.47	6.17	34.52	71.19	71.31	74.00	2.69	Peak
2488.750	28.48	6.17	34.52	72.33	72.47	74.00	1.53	Peak

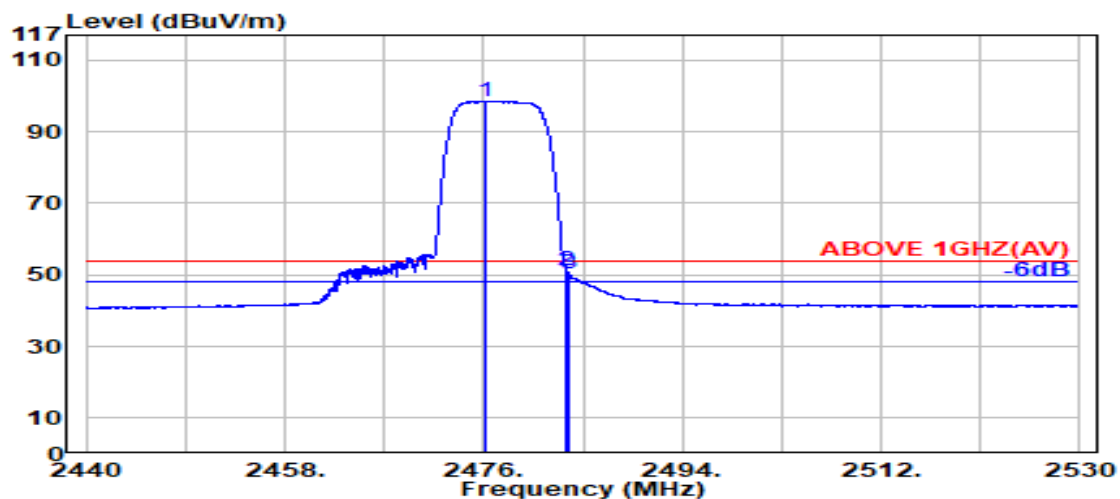

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.200	28.45	6.16	34.52	98.53	98.62	---	---	Average
2483.500	28.47	6.17	34.52	51.09	51.20	54.00	2.80	Average
2483.700	28.47	6.17	34.52	50.00	50.12	54.00	3.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

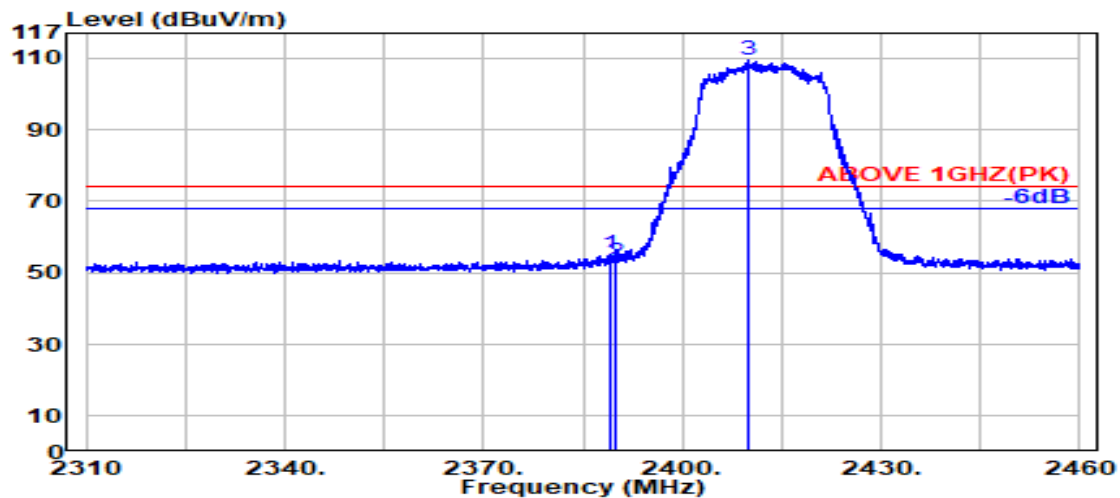

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.50	55.55	55.28	74.00	18.72	Peak
2389.800	28.18	6.03	34.50	53.19	52.91	74.00	21.09	Peak
@ 2410.100	28.16	6.06	34.50	109.90	109.62	---	---	Peak

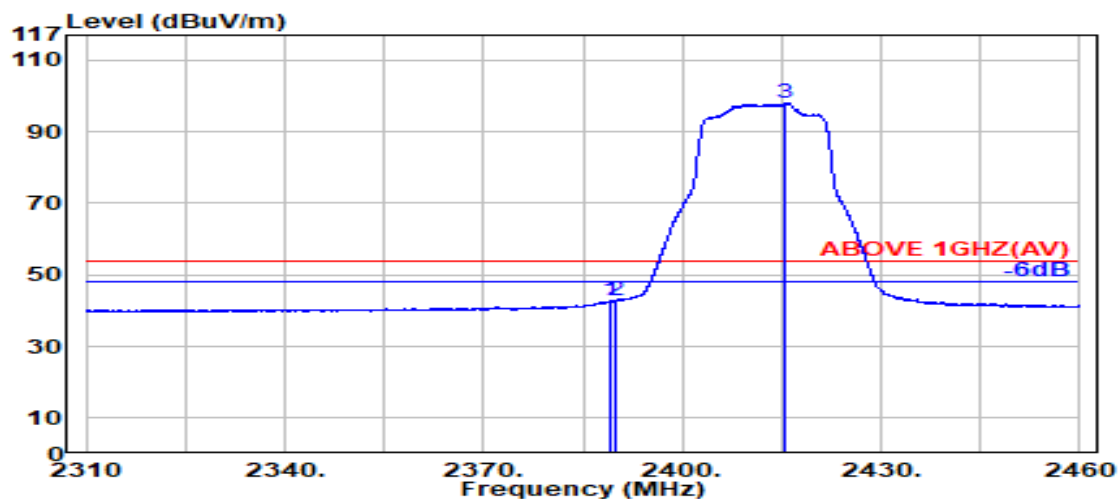

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.50	43.01	42.73	54.00	11.27	Average
2389.800	28.18	6.03	34.50	43.08	42.80	54.00	11.20	Average
@ 2415.400	28.19	6.07	34.50	98.28	98.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

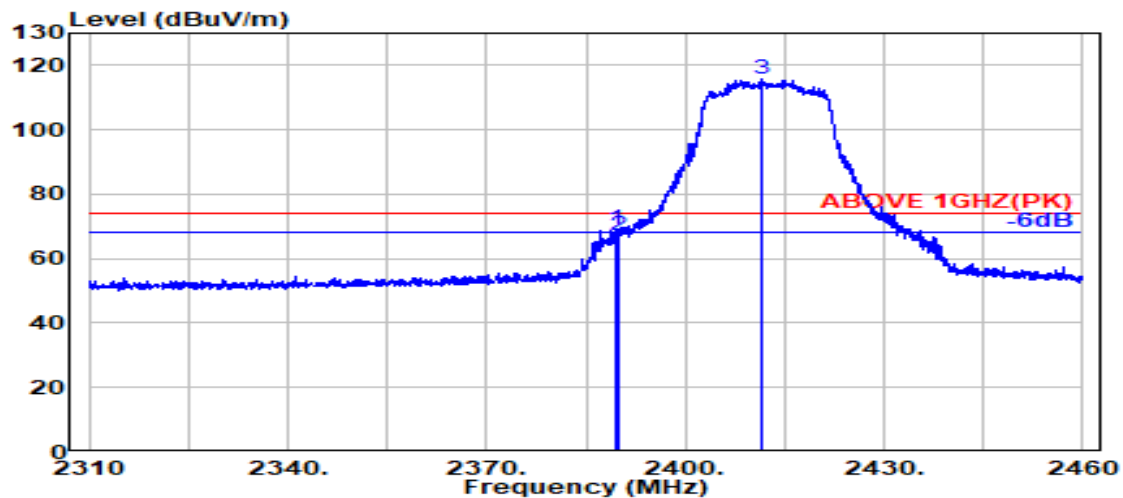

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	69.54	69.26	74.00	4.74	Peak
2389.800	28.18	6.03	34.50	67.39	67.11	74.00	6.89	Peak
@ 2411.550	28.17	6.07	34.50	116.06	115.79	---	---	Peak

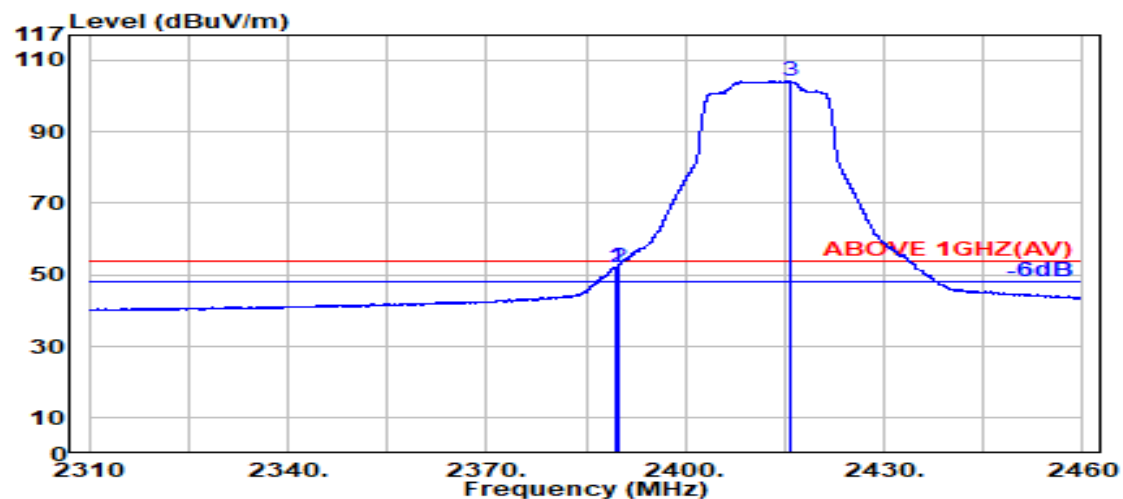

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	52.59	52.30	54.00	1.70	Average
2389.800	28.18	6.03	34.50	52.59	52.31	54.00	1.69	Average
@ 2415.750	28.20	6.07	34.50	104.36	104.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

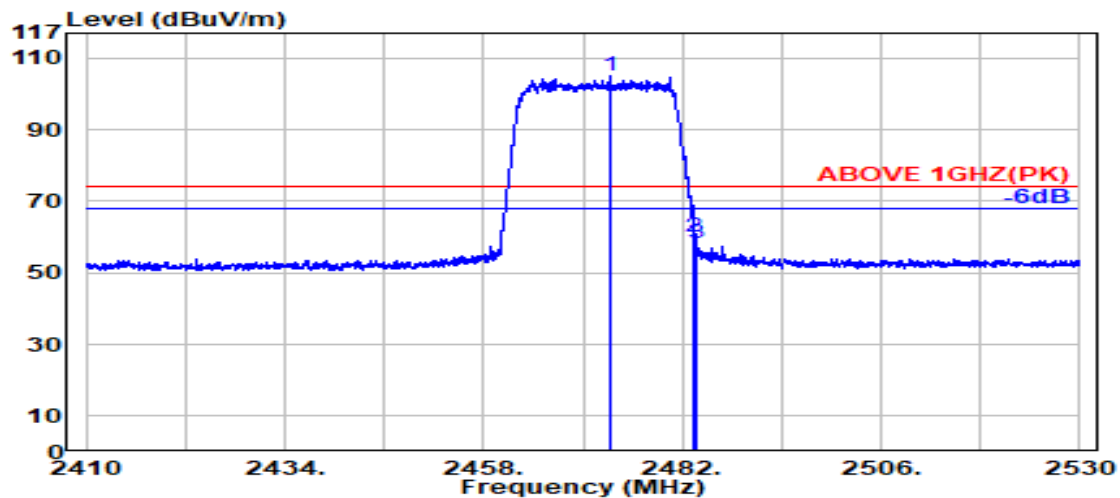

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.400	28.45	6.15	34.51	104.91	104.99	---	---	Peak
2483.500	28.47	6.17	34.52	60.01	60.13	74.00	13.87	Peak
2483.700	28.47	6.17	34.52	58.23	58.35	74.00	15.65	Peak

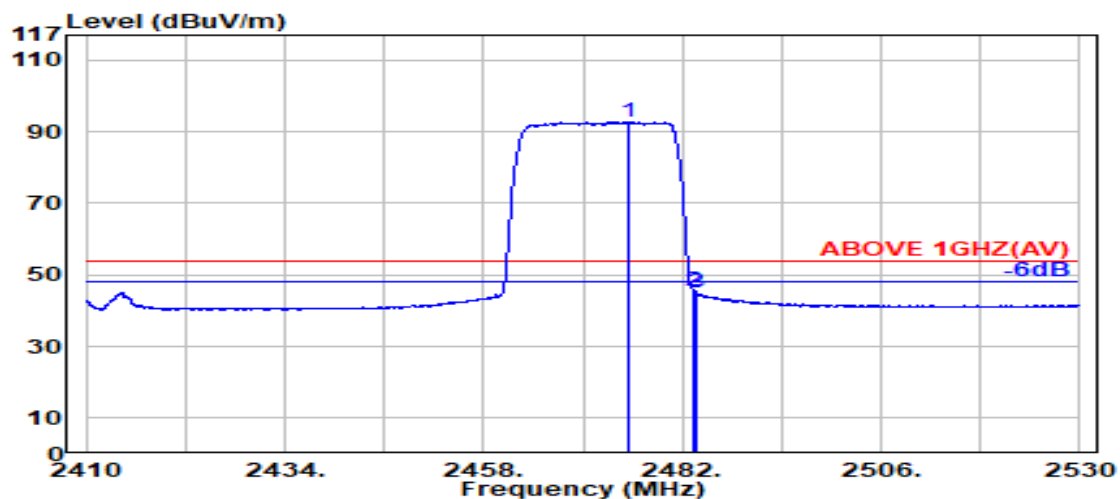

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.550	28.45	6.16	34.52	92.63	92.72	---	---	Average
2483.500	28.47	6.17	34.52	45.27	45.38	54.00	8.62	Average
2483.700	28.47	6.17	34.52	44.71	44.82	54.00	9.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

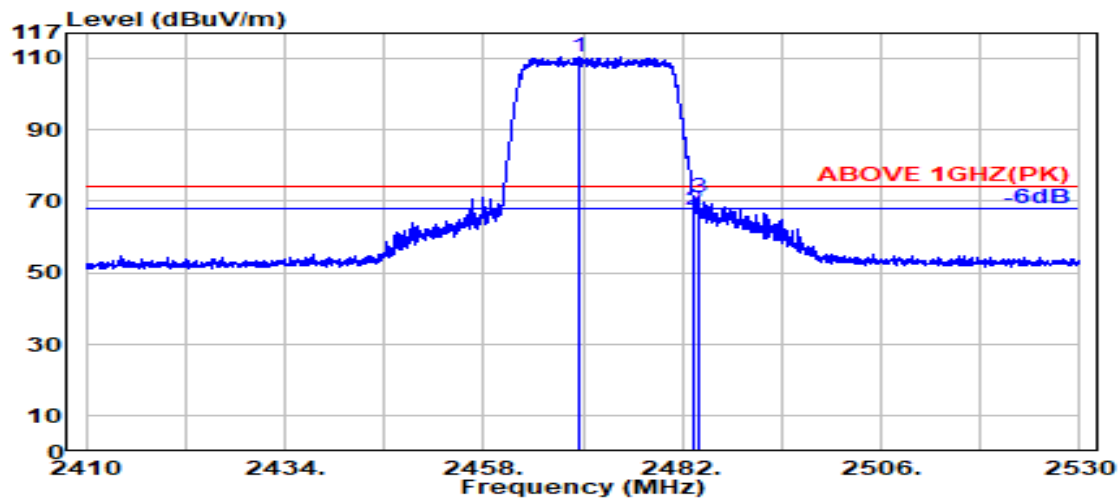

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.44	6.15	34.51	110.48	110.55	---	---	Peak
2483.500	28.47	6.17	34.52	67.51	67.63	74.00	6.37	Peak
2483.900	28.47	6.17	34.52	70.99	71.11	74.00	2.89	Peak

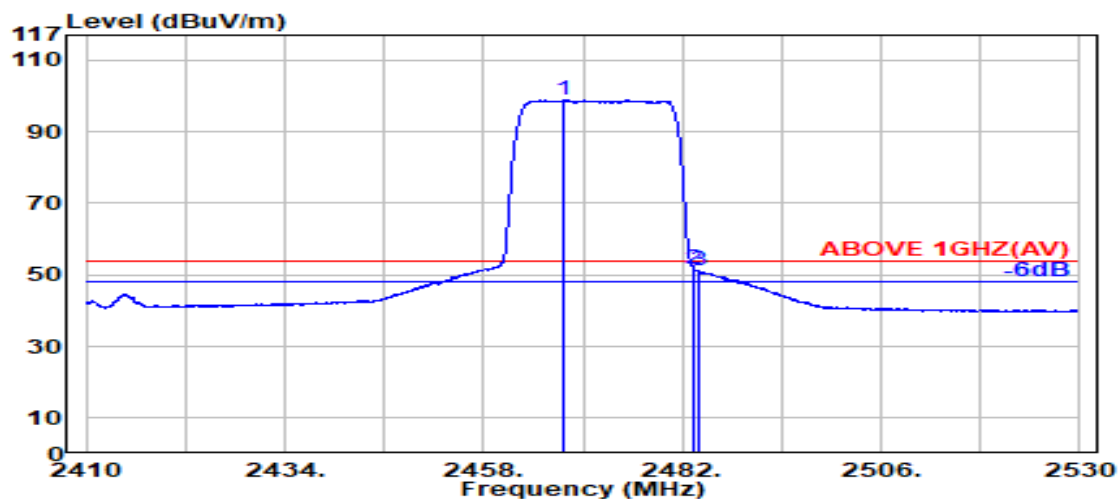

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.700	28.44	6.15	34.51	98.88	98.95	---	---	Average
2483.500	28.47	6.17	34.52	51.45	51.57	54.00	2.43	Average
2483.850	28.47	6.17	34.52	51.17	51.29	54.00	2.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

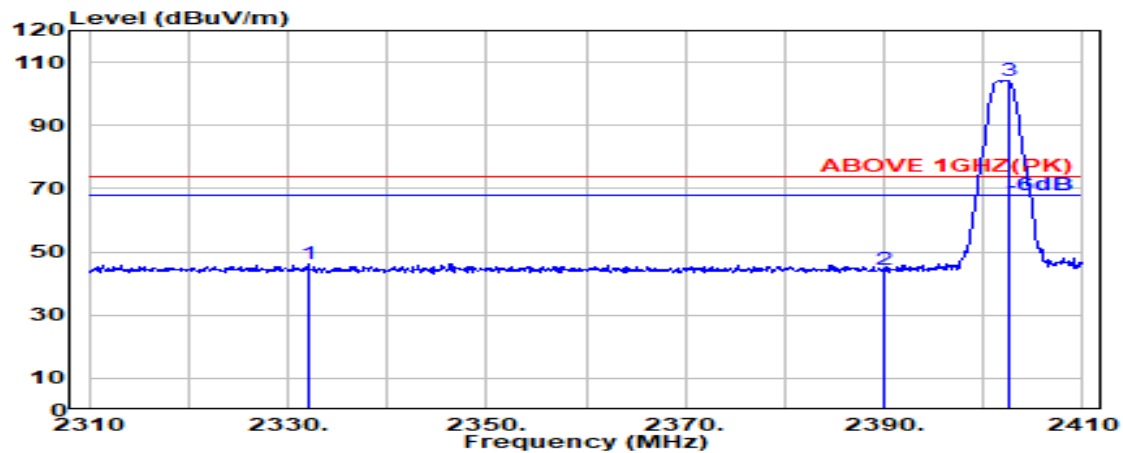

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2332.000	28.36	5.95	34.49	46.37	46.19	74.00	27.81	Peak
2390.000	28.18	6.03	34.50	44.44	44.16	74.00	29.84	Peak
@ 2402.500	28.12	6.05	34.50	104.49	104.16	---	---	Peak

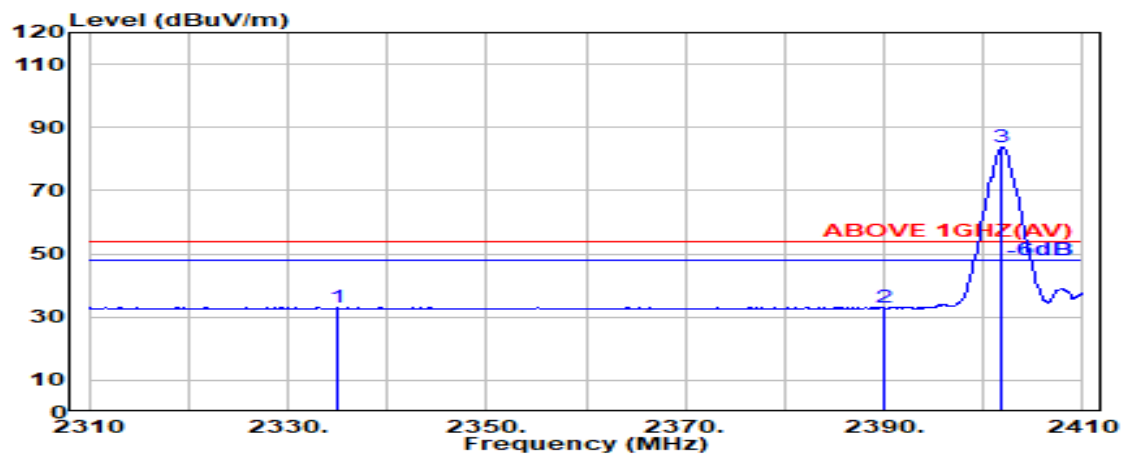

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2335.000	28.38	5.95	34.49	33.30	33.15	54.00	20.85	Average
2390.000	28.18	6.03	34.50	33.27	32.99	54.00	21.01	Average
@ 2401.800	28.11	6.05	34.50	84.18	83.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

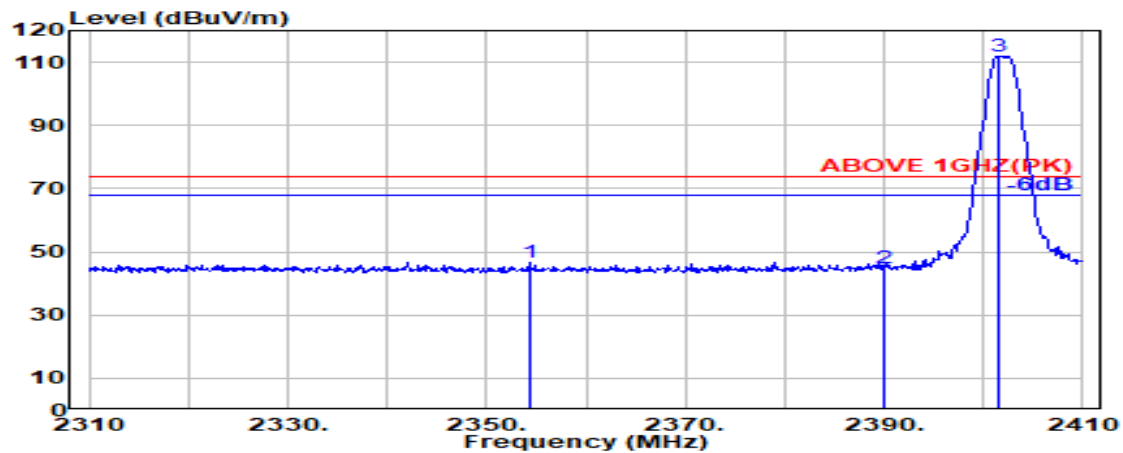

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2354.300	28.47	5.98	34.49	46.53	46.48	74.00	27.52	Peak
2390.000	28.18	6.03	34.50	45.09	44.80	74.00	29.20	Peak
@ 2401.500	28.11	6.05	34.50	112.25	111.91	---	---	Peak

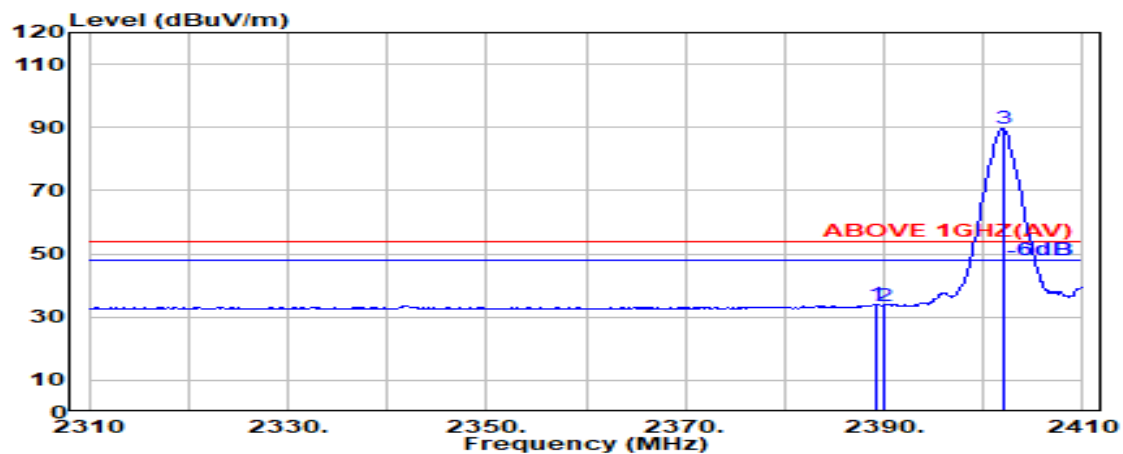

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.50	34.38	34.10	54.00	19.90	Average
2390.000	28.18	6.03	34.50	33.91	33.62	54.00	20.38	Average
@ 2402.000	28.11	6.05	34.50	90.15	89.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

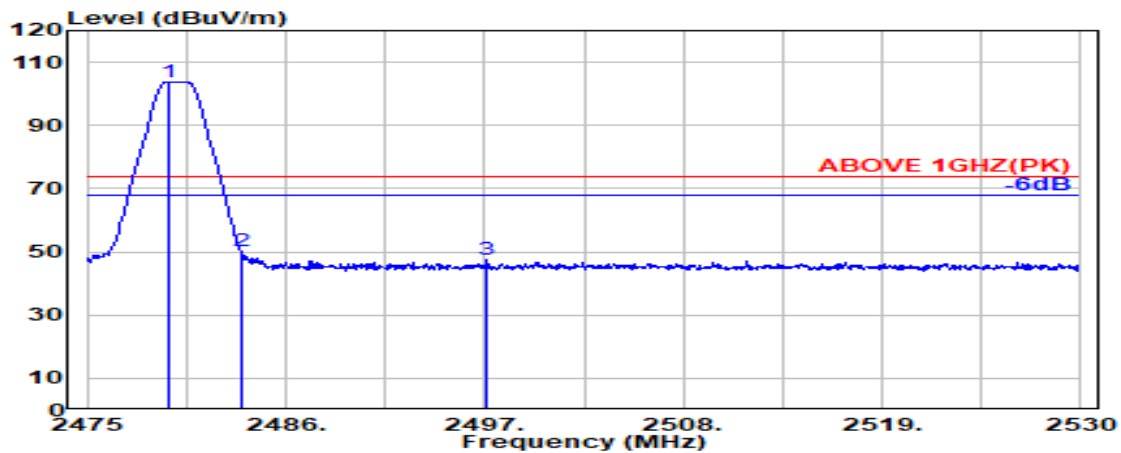

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	6.16	34.52	103.79	103.89	---	---	Peak
2483.500	28.47	6.17	34.52	50.30	50.42	74.00	23.58	Peak
2497.150	28.49	6.19	34.52	47.25	47.41	74.00	26.59	Peak

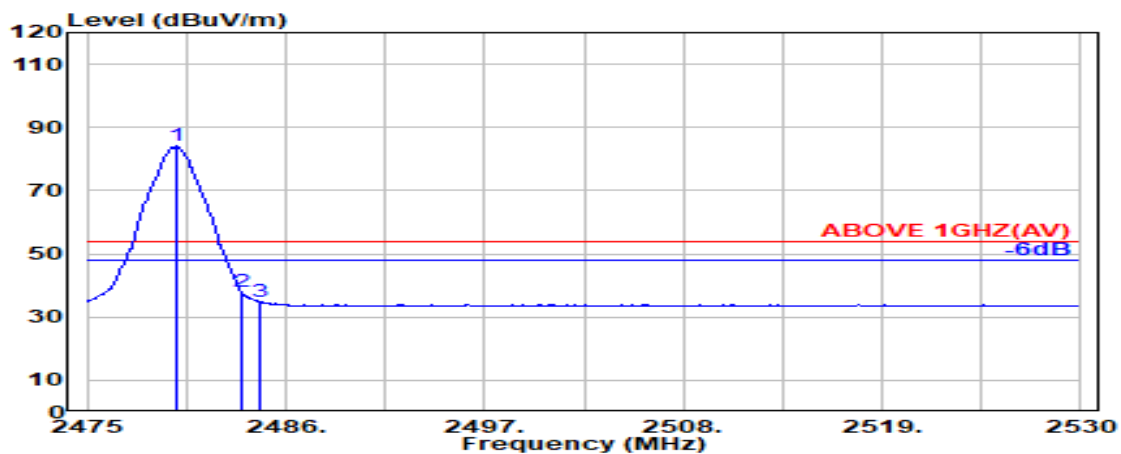

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.46	6.16	34.52	84.03	84.13	---	---	Average
2483.500	28.47	6.17	34.52	37.99	38.10	54.00	15.90	Average
2484.500	28.47	6.17	34.52	34.62	34.74	54.00	19.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

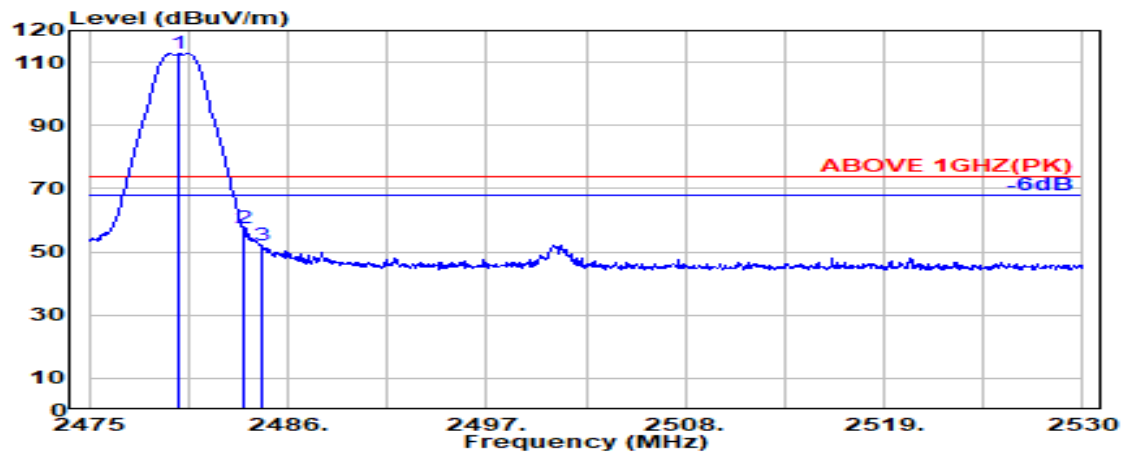

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	34.52	112.59	112.69	---	---	Peak
2483.500	28.47	6.17	34.52	57.36	57.48	74.00	16.52	Peak
2484.500	28.47	6.17	34.52	52.12	52.24	74.00	21.76	Peak

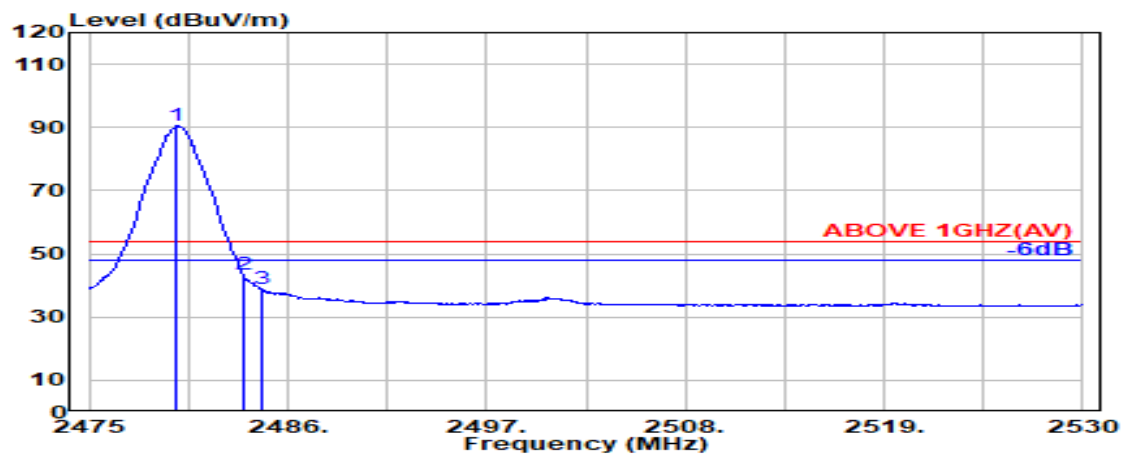

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.850	28.46	6.16	34.52	90.34	90.45	---	---	Average
2483.500	28.47	6.17	34.52	43.35	43.47	54.00	10.53	Average
2484.500	28.47	6.17	34.52	38.76	38.88	54.00	15.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

- **With INPAQ Antenna**

Wireless LAN Mode

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	41.99	44.06	54.00	9.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	41.67	43.73	54.00	10.27	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.89	43.05	54.00	10.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	41.53	43.69	54.00	10.31	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.93	42.09	54.00	11.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.61	42.77	54.00	11.23	Peak

Mode	802.11n-HT40	Frequency	TX 2437 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	40.82	42.86	54.00	11.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	41.94	43.98	54.00	10.02	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.03	42.19	54.00	11.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	41.78	43.94	54.00	10.06	Peak

Mode	802.11ax-HE40	Frequency	TX 2437 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	41.76	43.79	54.00	10.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	40.84	42.88	54.00	11.12	Peak

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	40.77	42.84	54.00	11.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	41.92	43.99	54.00	10.01	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.20	8.18	39.24	40.95	43.09	54.00	10.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.20	8.18	39.24	40.91	43.05	54.00	10.95	Peak

● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	39.00	40.74	54.00	13.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	39.89	41.63	54.00	12.37	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	41.13	43.19	54.00	10.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	40.98	43.04	54.00	10.96	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	42.51	44.72	54.00	9.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	42.39	44.60	54.00	9.40	Peak

● **With LUXSHARE-ICT Antenna**

WLAN Mode

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.52	41.77	54.00	12.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.97	42.23	54.00	11.77	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	34.67	42.13	54.00	11.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	34.14	41.60	54.00	12.40	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.24	42.69	54.00	11.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	34.58	42.03	54.00	11.97	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	34.62	41.82	54.00	12.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.36	42.56	54.00	11.44	Peak

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.16	42.62	54.00	11.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	33.73	41.19	54.00	12.81	Peak

Mode	802.11ax-HE40	Frequency	TX 2437MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.60	42.80	54.00	11.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	34.47	41.68	54.00	12.32	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.97	42.22	54.00	11.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.51	41.76	54.00	12.24	Peak

Mode	802.11be-EHT40	Frequency	TX 2437 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.18	42.39	54.00	11.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	34.98	42.19	54.00	11.81	Peak

BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	34.96	41.91	54.00	12.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	35.76	42.72	54.00	11.28	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.45	42.68	54.00	11.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.47	42.70	54.00	11.30	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	35.59	43.07	54.00	10.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	34.37	41.85	54.00	12.15	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.