

A.3. MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH

Test Date	2024/10/27~28	Temp./Hum.	23~24°C/56~61%
Cable Loss	1.00 dB	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1. Average Output Power and Emission/Occupied Bandwidth

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5260	22.20	23.57	16.659	16.751	17.74	17.70	N/A	17.74	24	24.46
	5300	23.05	22.91	16.691	16.679	17.99	17.38		17.99		24.60
	5320	21.89	23.59	16.614	16.748	17.64	17.75		17.75		24.40
U-NII Band 2C	5500	22.57	23.28	16.572	16.697	18.11	17.71		18.11		24.54
	5580	22.28	23.06	16.661	16.688	18.22	17.66		18.22		24.48
	5700	22.40	22.67	16.670	16.674	18.18	18.41		18.41		24.50
	5720	23.04	23.02	16.593	16.665	17.88	18.04		18.04		24.62

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5260	22.79	23.09	17.751	17.729	17.19	17.37	N/A	20.29	24	24.58
	5300	24.03	23.80	17.736	17.779	17.12	17.00		20.07		24.77
	5320	23.65	24.04	17.735	17.760	17.15	17.39		20.28		24.74
U-NII Band 2C	5500	23.08	22.76	17.806	17.765	17.45	16.93		20.21		24.57
	5580	23.23	23.36	17.789	17.775	17.75	17.57		20.67		24.66
	5700	23.52	23.60	17.780	17.791	17.92	17.70		20.82		24.71
	5720	23.35	22.71	17.803	17.779	17.49	17.93		20.73		24.56

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5270	42.47	42.44	36.037	36.044	16.67	16.97	N/A	19.83	24	27.28
	5310	43.08	41.72	36.072	36.096	15.98	16.36		19.18		27.20
U-NII Band 2C	5510	42.88	41.55	36.022	36.036	17.65	17.28		20.48		27.19
	5550	43.39	41.51	36.031	36.029	17.17	16.89		20.04		27.18
	5670	42.08	41.55	36.052	36.005	18.27	18.15		21.22		27.19
	5710	43.47	41.74	36.064	36.048	17.92	17.77		20.86		27.21

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB)
when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ac- VHT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5260	22.79	23.09	17.751	17.729	17.04	17.19	N/A	20.13	24	24.58
	5300	24.03	23.80	17.736	17.779	16.93	16.84		19.90		24.77
	5320	23.65	24.04	17.735	17.760	17.02	17.23		20.14		24.74
U-NII Band 2C	5500	23.08	22.76	17.806	17.765	17.33	16.80		20.08		24.57
	5580	23.23	23.36	17.789	17.775	17.62	17.37		20.51		24.66
	5700	23.52	23.60	17.780	17.791	17.78	17.59		20.70		24.71
	5720	23.35	22.71	17.803	17.779	17.38	17.82		20.62		24.56

Mode 802.11ac- VHT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5270	42.47	42.44	36.037	36.044	16.67	16.97	N/A	19.83	24	27.28
	5310	43.08	41.72	36.072	36.096	15.98	16.36		19.18		27.20
U-NII Band 2C	5510	42.88	41.55	36.022	36.036	17.65	17.28		20.48		27.19
	5550	43.39	41.51	36.031	36.029	17.17	16.89		20.04		27.18
	5670	42.08	41.55	36.052	36.005	18.27	18.15		21.22		27.19
	5710	43.47	41.74	36.064	36.048	17.92	17.77		20.86		27.21

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5290	84.87	83.12	75.176	75.162	16.73	16.18	N/A	19.47	24	30.20
U-NII Band 2C	5530	83.74	82.90	75.118	75.108	17.51	17.28		20.41		30.19
	5610	85.90	84.84	75.180	75.199	17.21	16.86		20.05		30.29
	5690	83.26	84.15	75.160	75.046	17.18	17.09		20.15		30.20

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB)
when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5250	164.10	163.70	153.50	153.57	14.83	14.37	N/A	17.62	24	33.14
U-NII Band 2C	5570	163.10	163.00	153.70	153.48	15.89	15.20		18.57		33.12

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5260	24.19	23.76	18.943	18.913	16.72	17.32	N/A	20.04	24	24.76
	5300	24.64	23.68	18.906	18.914	17.28	17.29		20.30		24.74
	5320	23.41	23.62	18.920	18.928	16.83	17.12		19.99		24.69
U-NII Band 2C	5500	23.86	23.90	18.921	18.895	17.32	17.50		20.42		24.78
	5580	22.71	23.91	18.881	18.879	17.28	16.76		20.04		24.56
	5700	23.19	23.90	18.958	18.913	17.43	17.15		20.30		24.65
	5720	23.37	23.10	18.916	18.912	18.30	17.68		21.01		24.64

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5270	42.75	41.21	37.564	37.576	17.25	17.23	N/A	20.25	24	27.15
	5310	41.68	40.92	37.570	37.502	17.02	16.89		19.97		27.12
U-NII Band 2C	5510	41.29	41.15	37.604	37.582	17.68	17.66		20.68		27.14
	5550	41.92	43.25	37.587	37.566	17.22	17.53		20.39		27.22
	5670	41.63	42.09	37.496	37.545	18.08	17.73		20.92		27.19
	5710	42.40	42.06	37.547	37.589	18.21	17.99		21.11		27.24

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5290	82.49	83.57	76.580	76.613	16.23	15.76	N/A	19.01	24	30.16
U-NII Band 2C	5530	82.22	82.68	76.609	76.619	17.18	16.83		20.02		30.15
	5610	81.71	81.46	76.499	76.785	16.86	16.48		19.68		30.11
	5690	84.89	81.47	76.620	76.588	16.87	16.74		19.82		30.11

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5250	162.20	163.50	155.10	155.26	14.53	14.68	N/A	17.62	24	33.10
U-NII Band 2C	5570	162.10	155.18	155.41	155.18	15.26	15.60		18.44		32.91

Mode 802.11be- EHT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB)		Occupied (99%)							
		Bandwidth		Bandwidth		Aux	Main				
U-NII Band 2A	5260	22.58	23.05	18.916	18.927	17.11	17.69	N/A	20.42	24	24.54
	5300	23.41	23.74	18.864	18.900	17.05	17.58		20.33		24.69
	5320	22.86	23.49	18.918	18.886	17.30	16.78		20.06		24.59
U-NII Band 2C	5500	23.28	23.50	18.917	18.908	17.21	17.03		20.13		24.67
	5580	23.30	22.44	18.919	18.866	17.73	17.27		20.52		24.51
	5700	23.10	22.82	18.931	18.915	17.60	17.90		20.76		24.58
	5720	23.34	23.09	18.909	18.962	18.24	17.74		21.01		24.63

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB)
when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11be- EHT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5270	41.42	43.88	37.494	37.579	16.82	17.28	N/A	20.07	24	27.17
	5310	41.41	41.60	37.491	37.491	16.52	16.79		19.67		27.17
U-NII Band 2C	5510	41.64	41.77	37.581	37.419	18.30	17.89		21.11		27.20
	5550	42.12	41.15	37.517	37.565	17.09	16.94		20.03		27.14
	5670	40.58	41.74	37.508	37.597	18.09	17.89		21.00		27.08
	5710	42.62	41.09	37.562	37.607	18.15	17.73		20.96		27.14

Mode 802.11be- EHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5290	83.29	82.91	76.758	76.830	16.23	15.91	N/A	19.08	24	30.19
U-NII Band 2C	5530	82.22	81.54	76.784	76.680	17.18	16.96		20.08		30.11
	5610	81.56	81.06	76.766	76.677	16.81	16.46		19.65		30.09
	5690	82.17	82.92	76.657	76.817	16.90	16.85		19.89		30.15

Mode 802.11be- EHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	162.0	163.5	154.62	155.18	14.74	14.41	N/A	17.59	24	33.10
U-NII Band 2C	5570	163.9	163.5	155.15	154.80	15.75	15.30		18.54		33.14

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5320	26/8	23.41	23.62	18.920	18.928	9.09	8.76	0.155	12.09		24.69
		52/40	23.41	23.62	18.920	18.928	11.84	12.37	0.155	15.28		24.69
		106/54	23.41	23.62	18.920	18.928	14.81	14.69	0.155	17.92		24.69
U-NII Band 2C	5500	26/0	23.86	23.90	18.921	18.895	9.22	9.17	0.155	12.36		24.78
		52/37	23.86	23.90	18.921	18.895	12.78	12.16	0.155	15.65		24.78
		106/53	23.86	23.90	18.921	18.895	15.36	15.46	0.155	18.58		24.78
	5700	26/8	23.19	23.90	18.958	18.913	9.55	9.12	0.155	12.51		24.65
		52/40	23.19	23.90	18.958	18.913	13.15	12.87	0.155	16.18		24.65
		106/54	23.19	23.90	18.958	18.913	16.32	16.13	0.155	19.39		24.65

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Confi guration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 1dBm+ 10 log B) ^{Note 3}
			Emission (26dB)		Occupied (99%)							
			Bandwidth		Bandwidth		Aux	Main				
U-NII Band 2A	5310	242/62	41.68	40.92	37.570	37.502	16.50	15.97	0.141	19.39	24	27.12
U-NII Band 2C	5510	242/61	41.29	41.15	37.604	37.582	17.17	17.22		20.35		27.14
	5670	242/62	41.63	42.09	37.496	37.545	18.02	17.35		20.85		27.19

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB)		Occupied (99%)							
			Bandwidth		Bandwidth		Aux	Main				
U-NII Band 2A	5290	484/66	82.49	83.57	76.580	76.613	14.87	15.32	0.150	18.26	24	30.16
U-NII Band 2C	5530	484/65	82.22	82.68	76.609	76.619	17.29	16.87		20.25		30.15
	5610	484/66	81.71	81.46	76.499	76.785	16.63	16.80		19.88		30.11

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB)
when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	996/97	162.20	163.50	155.10	155.26	15.45	15.12	0.15	18.45	24	33.10
		996/S67	162.20	163.50	155.10	155.26	14.52	14.20		17.52		33.10
U-NII Band 2C	5570	996/97	162.10	155.18	155.41	155.18	16.89	16.68		19.95		32.91
		996/S67	162.10	155.18	155.41	155.18	16.42	16.12		19.43		32.91

Mode 802.11be- EHT20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5320	26/8	22.86	23.49	18.918	18.886	8.95	9.02	0.155	12.15	24	24.59
		52/40	22.86	23.49	18.918	18.886	12.56	12.46	0.155	15.68		24.59
		106/54	22.86	23.49	18.918	18.886	15.31	14.95	0.155	18.30		24.59
U-NII Band 2C	5500	26/0	23.28	23.50	18.917	18.908	9.16	8.81	0.155	12.15		24.67
		52/37	23.28	23.50	18.917	18.908	12.53	12.57	0.155	15.72		24.67
		106/53	23.28	23.50	18.917	18.908	15.98	15.65	0.155	18.98		24.67
	5700	26/8	23.10	22.82	18.931	18.915	9.99	9.92	0.155	13.12		24.58
		52/40	23.10	22.82	18.931	18.915	12.52	12.42	0.155	15.64		24.58
		106/54	23.10	22.82	18.931	18.915	15.37	15.97	0.155	18.85		24.58

Mode 802.11be- EHT40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ^{Note 3}
			Emission (26dB)		Occupied (99%)							
			Bandwidth		Bandwidth		Aux	Main				
U-NII Band 2A	5310	242/62	41.41	41.60	37.491	37.491	15.78	16.24	0.150	19.18	24	27.17
U-NII Band 2C	5510	242/61	41.64	41.77	37.581	37.419	17.51	17.44		20.64		27.20
	5670	242/62	40.58	41.74	37.508	37.597	18.12	17.85		21.15		27.08

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11be- EHT80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 2A	5290	484/66	83.29	82.91	76.758	76.830	14.88	15.54	0.155	18.39	24	30.19
U-NII Band 2C	5530	484/65	82.22	81.54	76.784	76.680	16.69	17.03		20.03		30.11
	5610	484/66	81.56	81.06	76.766	76.677	16.52	15.86		19.37		30.09

Mode 802.11be- EHT160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	996/97	162.0	163.5	154.62	155.18	15.23	15.00	0.155	18.28	24	33.10
		996/S67	162.0	163.5	154.62	155.18	14.48	14.09		17.45		33.10
U-NII Band 2C	5570	996/97	163.9	163.5	155.15	154.80	16.98	16.69		20.00		33.14
		996/S67	163.9	163.5	155.15	154.80	16.35	16.10		19.39		33.14


Note: 1. The results have been included cable loss.


2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB)
when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

A.3.2. Measurement Plots

- Maximum Output Power

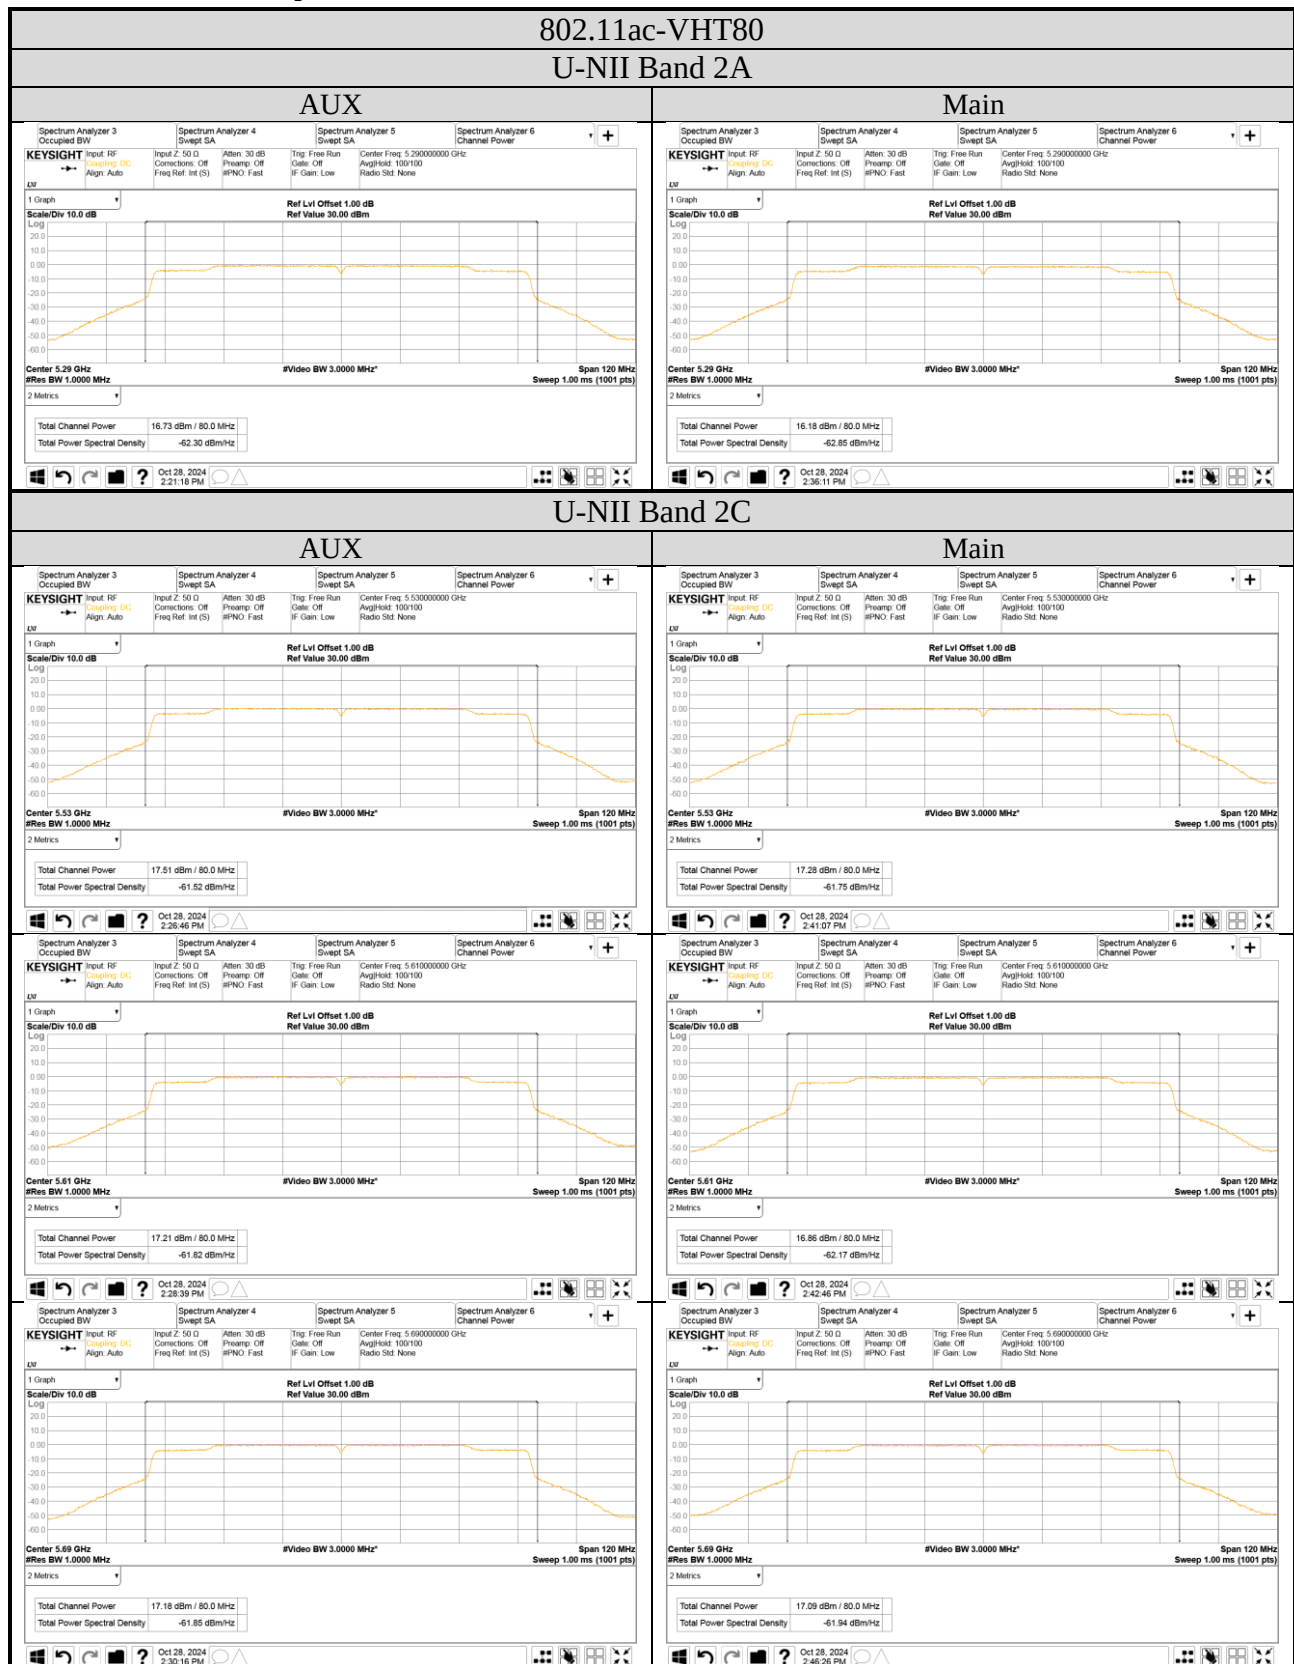


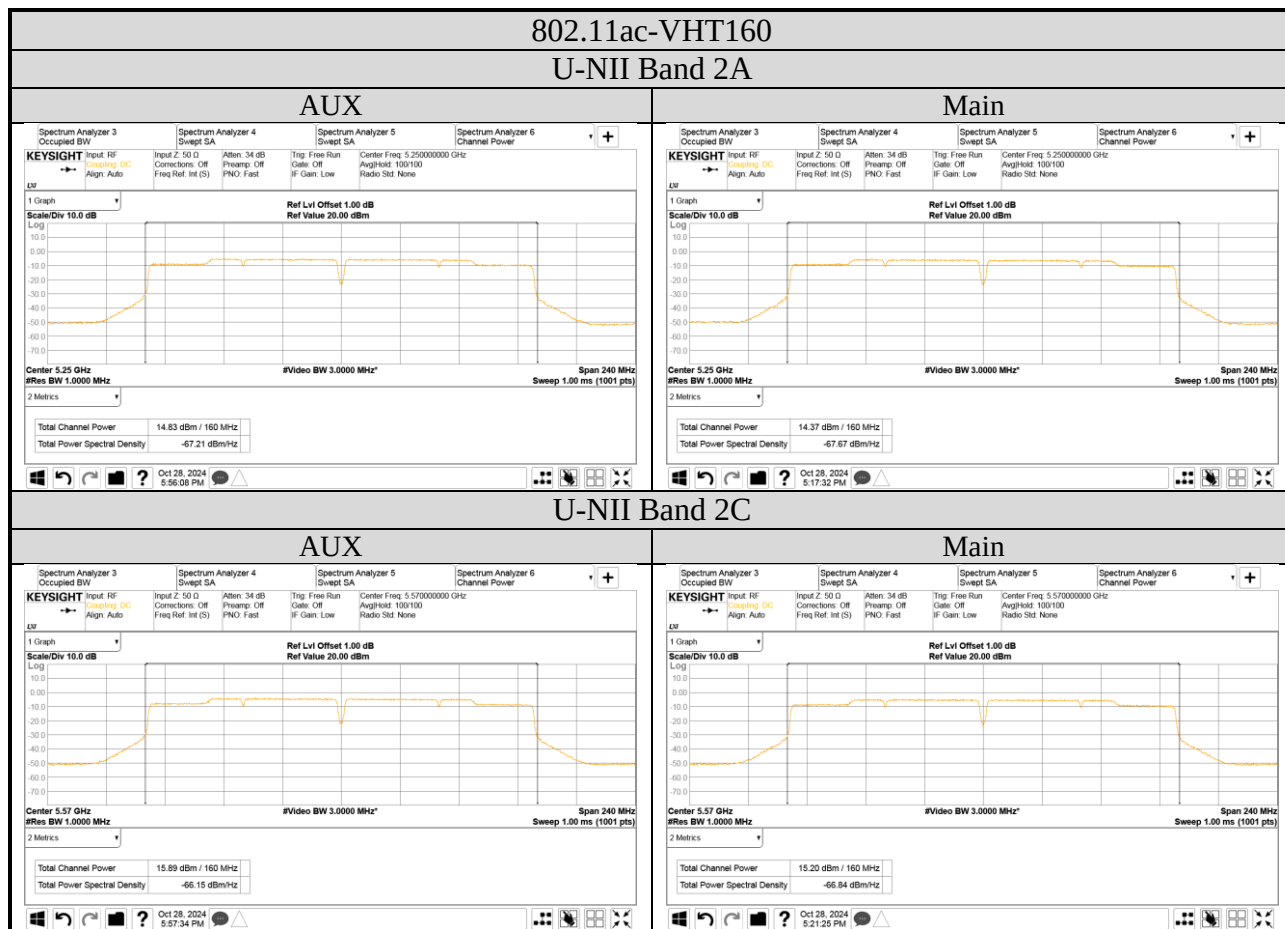


802.11ax-HE80

U-NII Band 2A

AUX

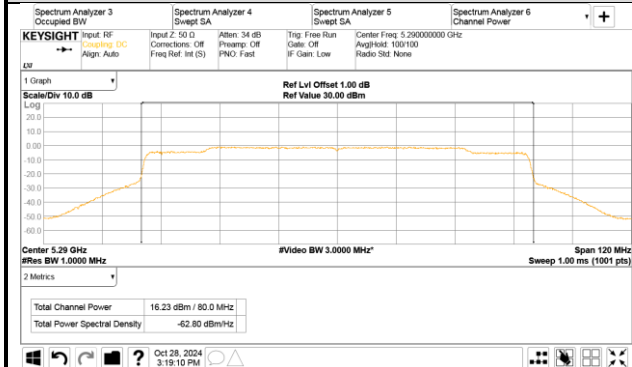


Main

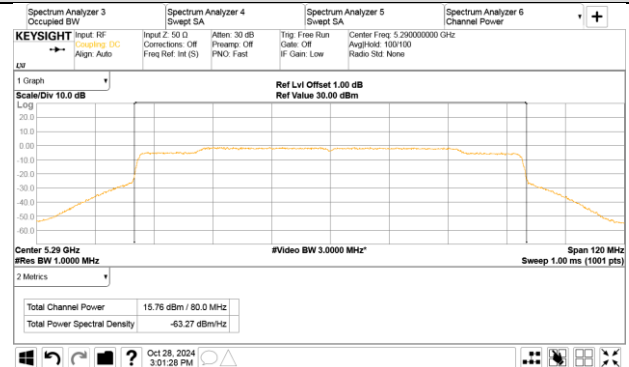


U-NII Band 2C


AUX

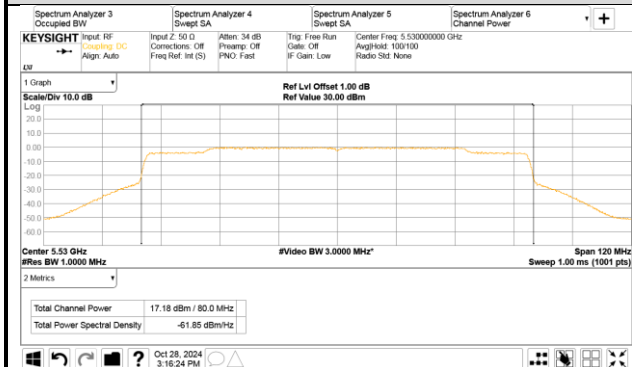


Main

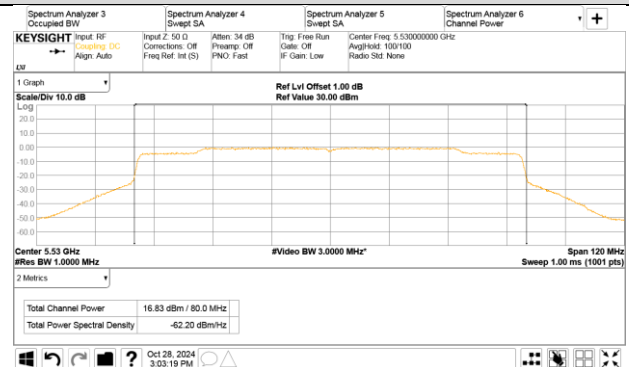


AUX

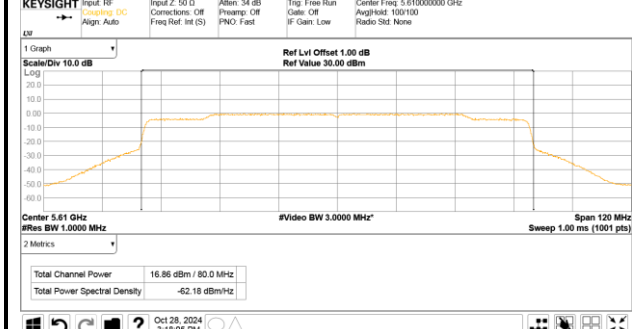


Main

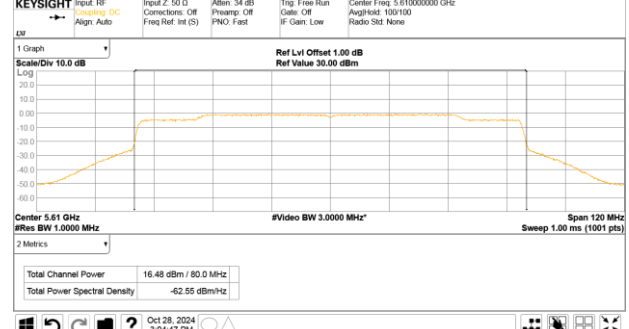



AUX

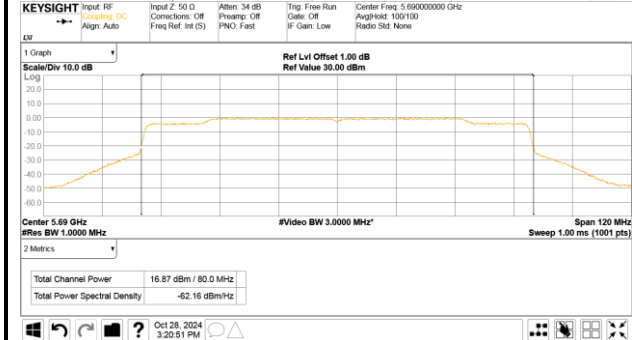



Main

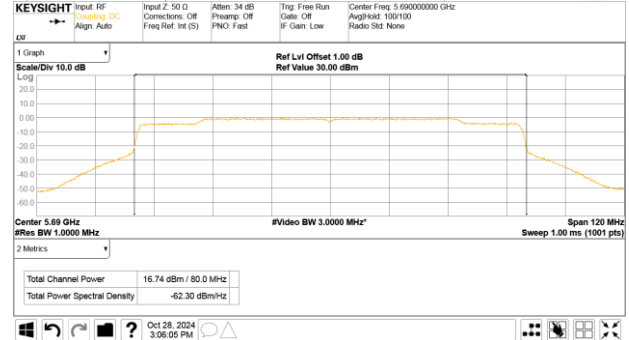


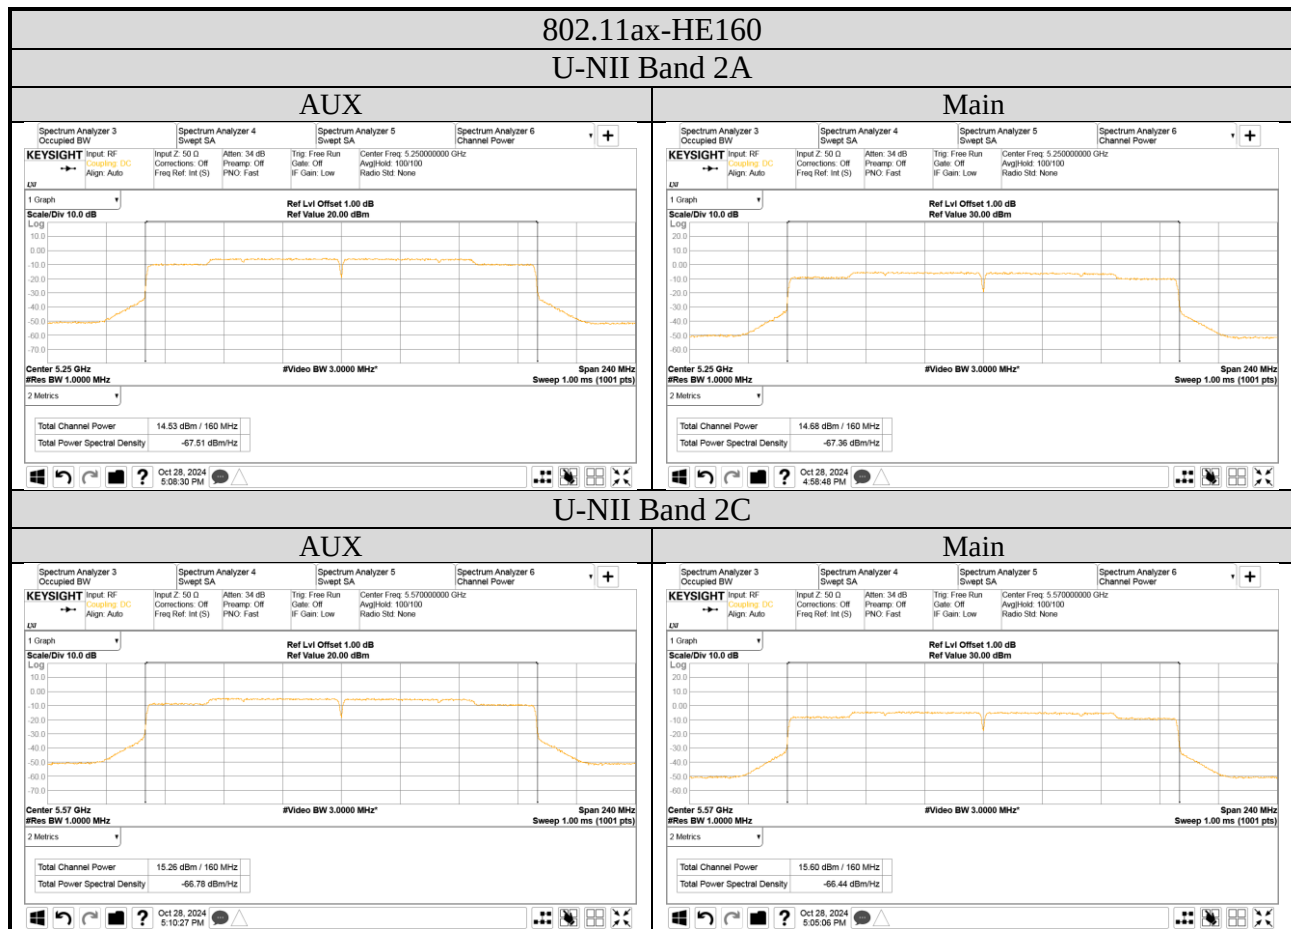


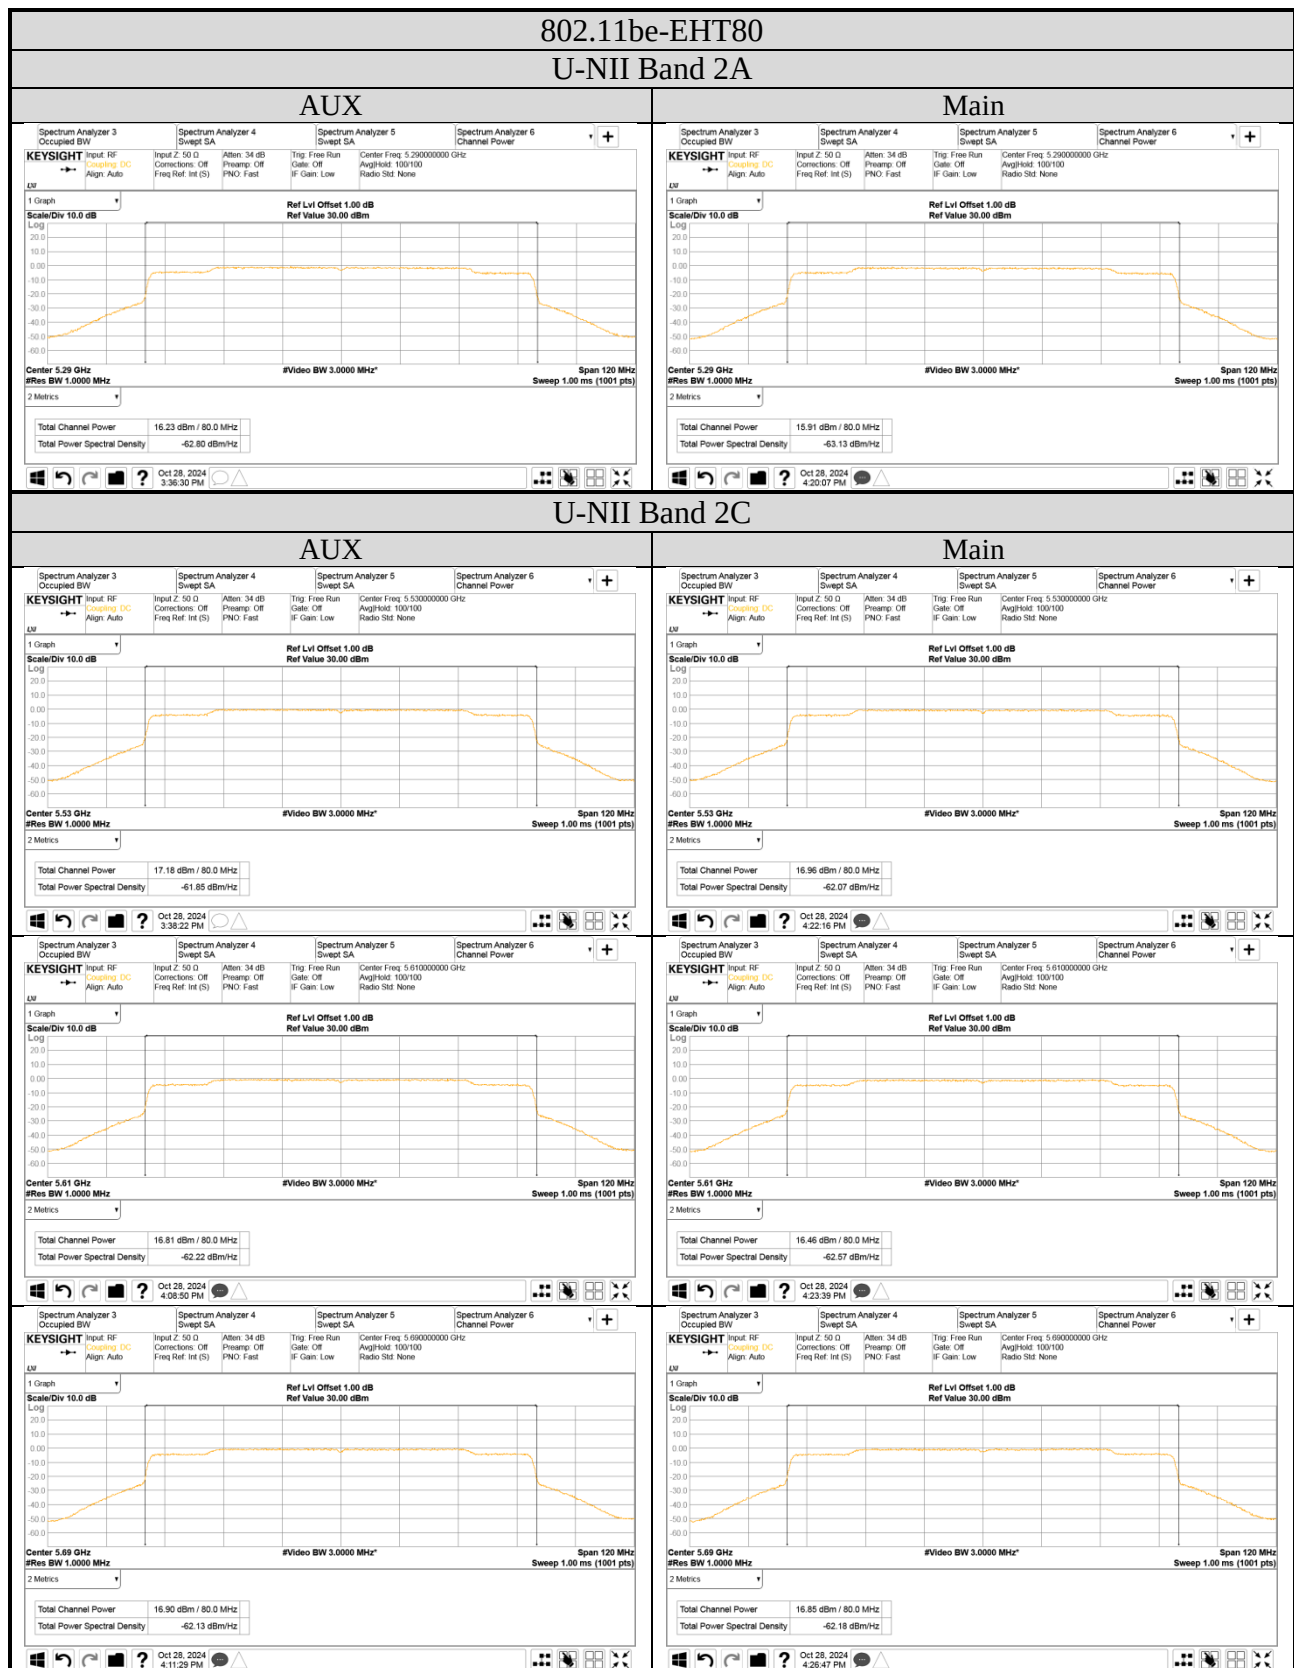


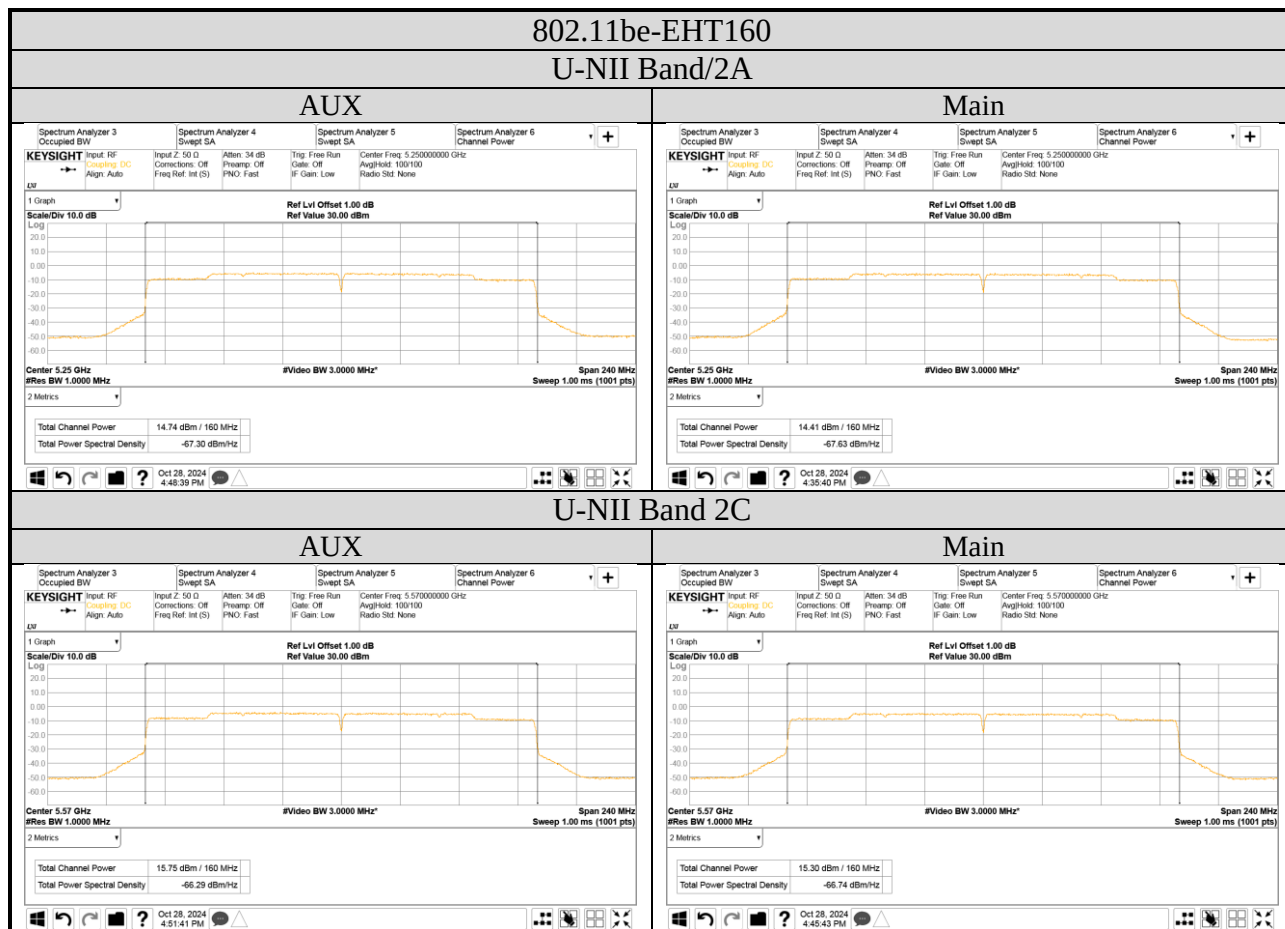

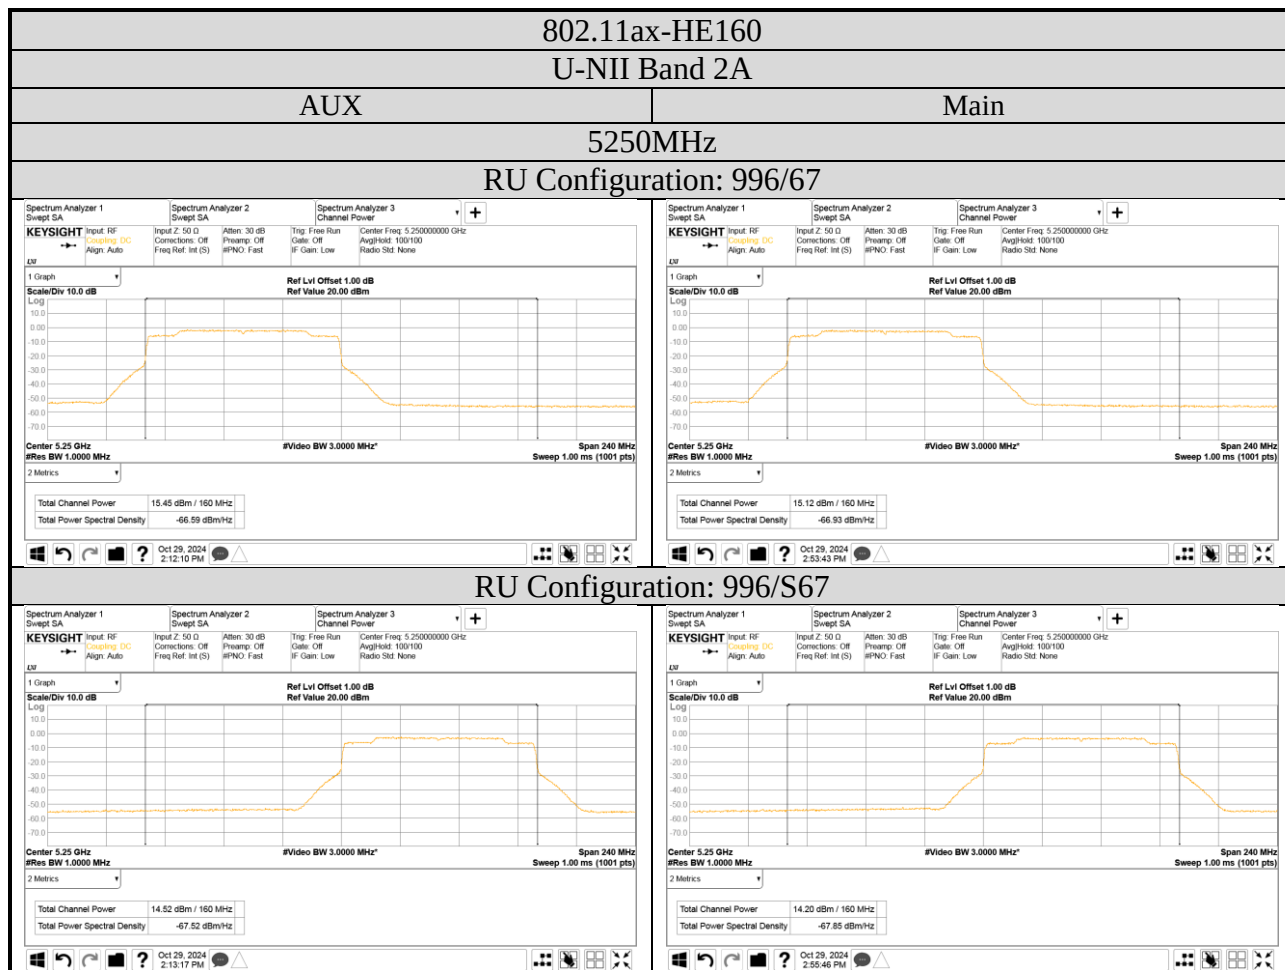


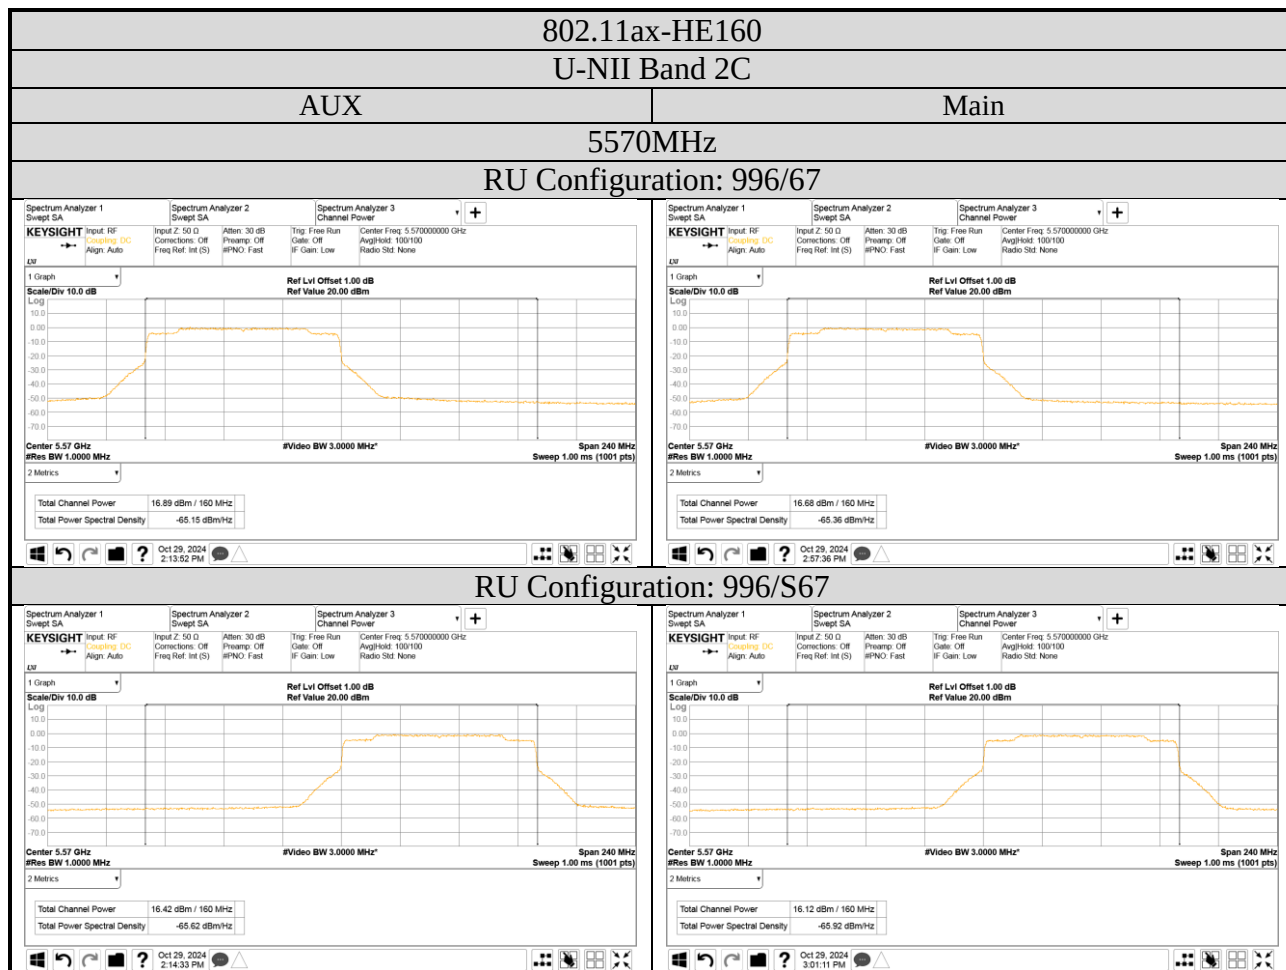

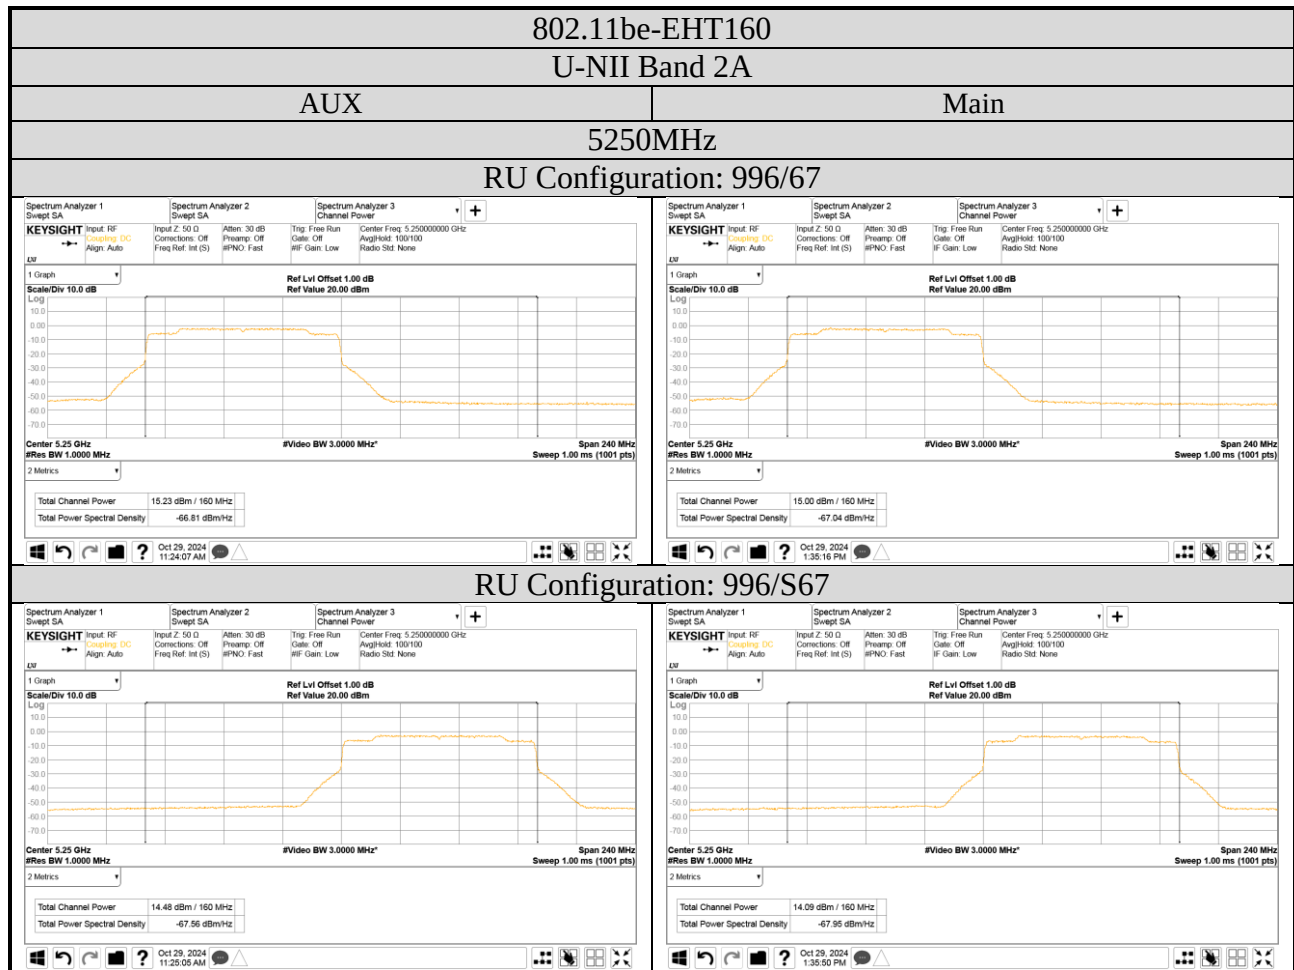


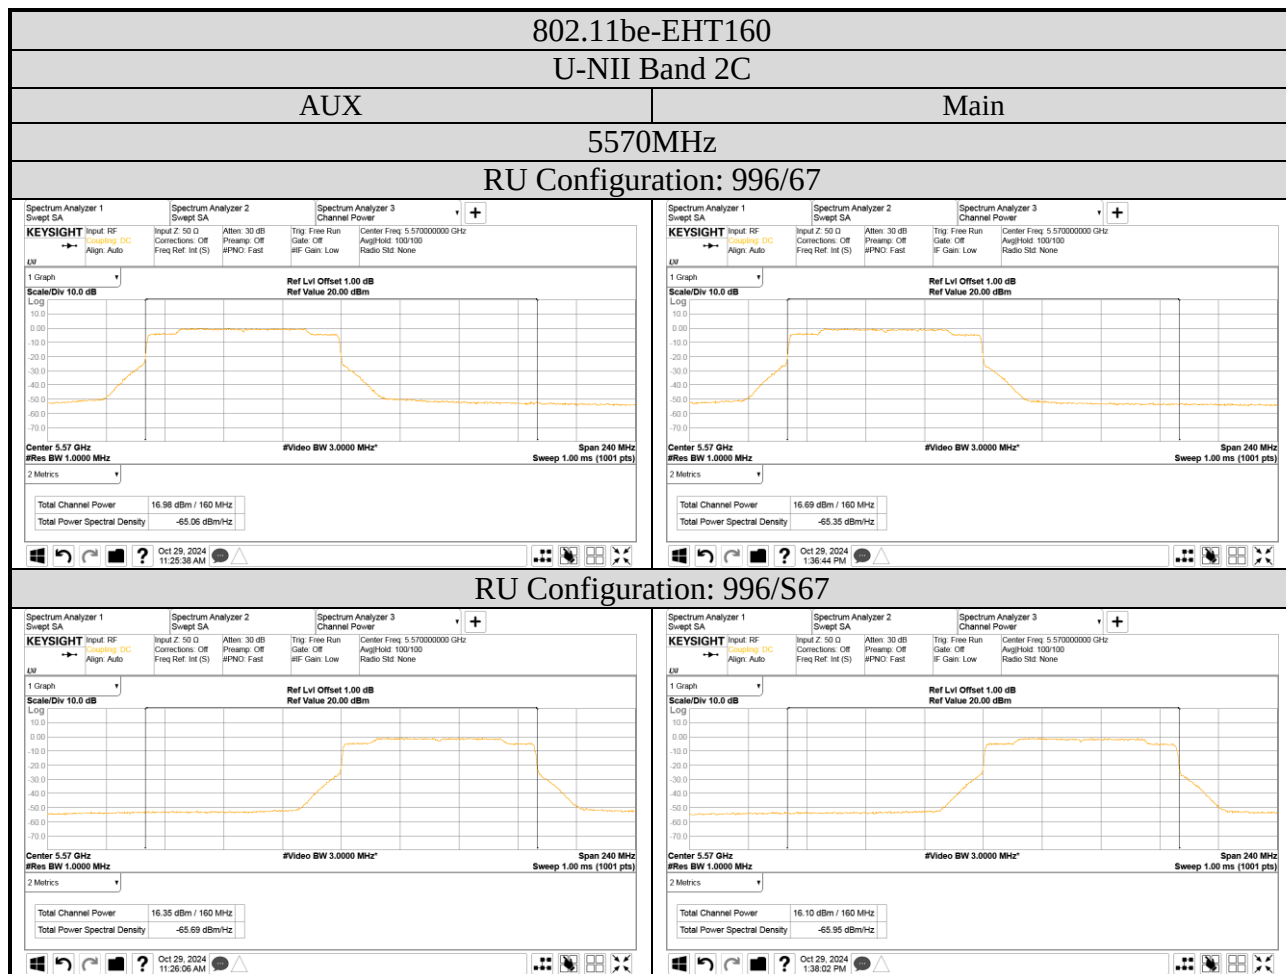


● Emission Bandwidth

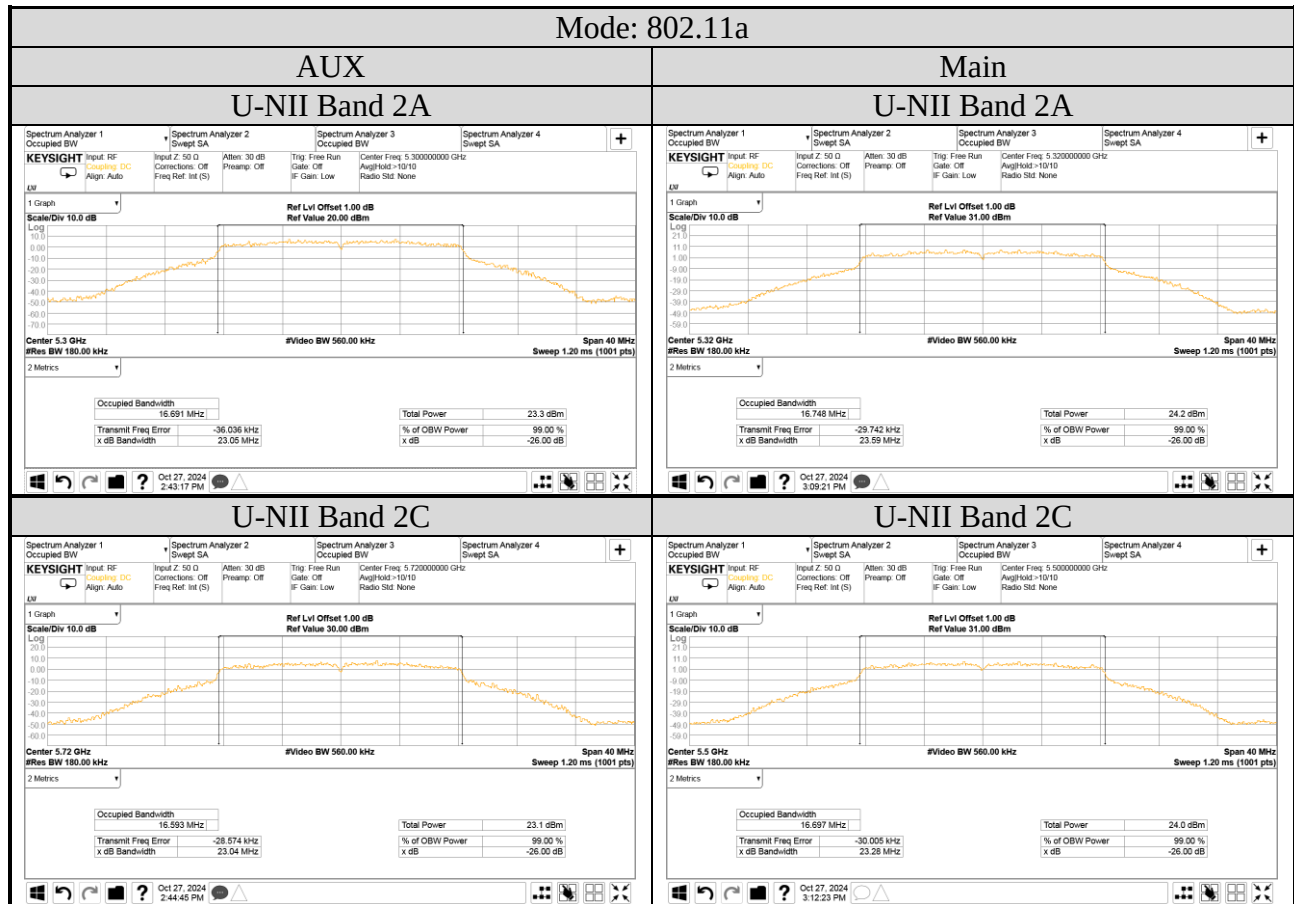


Note: We only presented max result (worst case) plots for each test mode

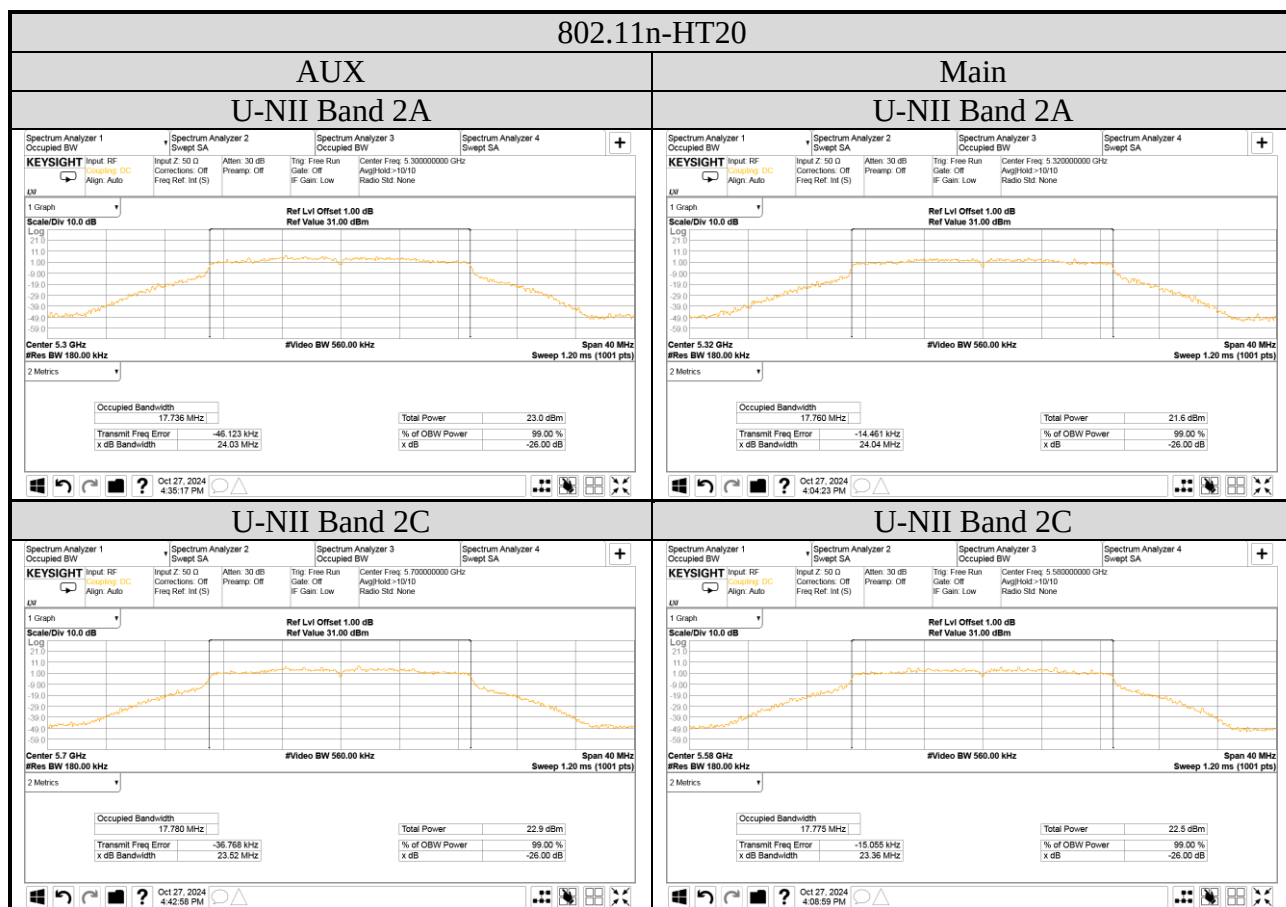


Note: We only presented max result (worst case) plots for each test mode

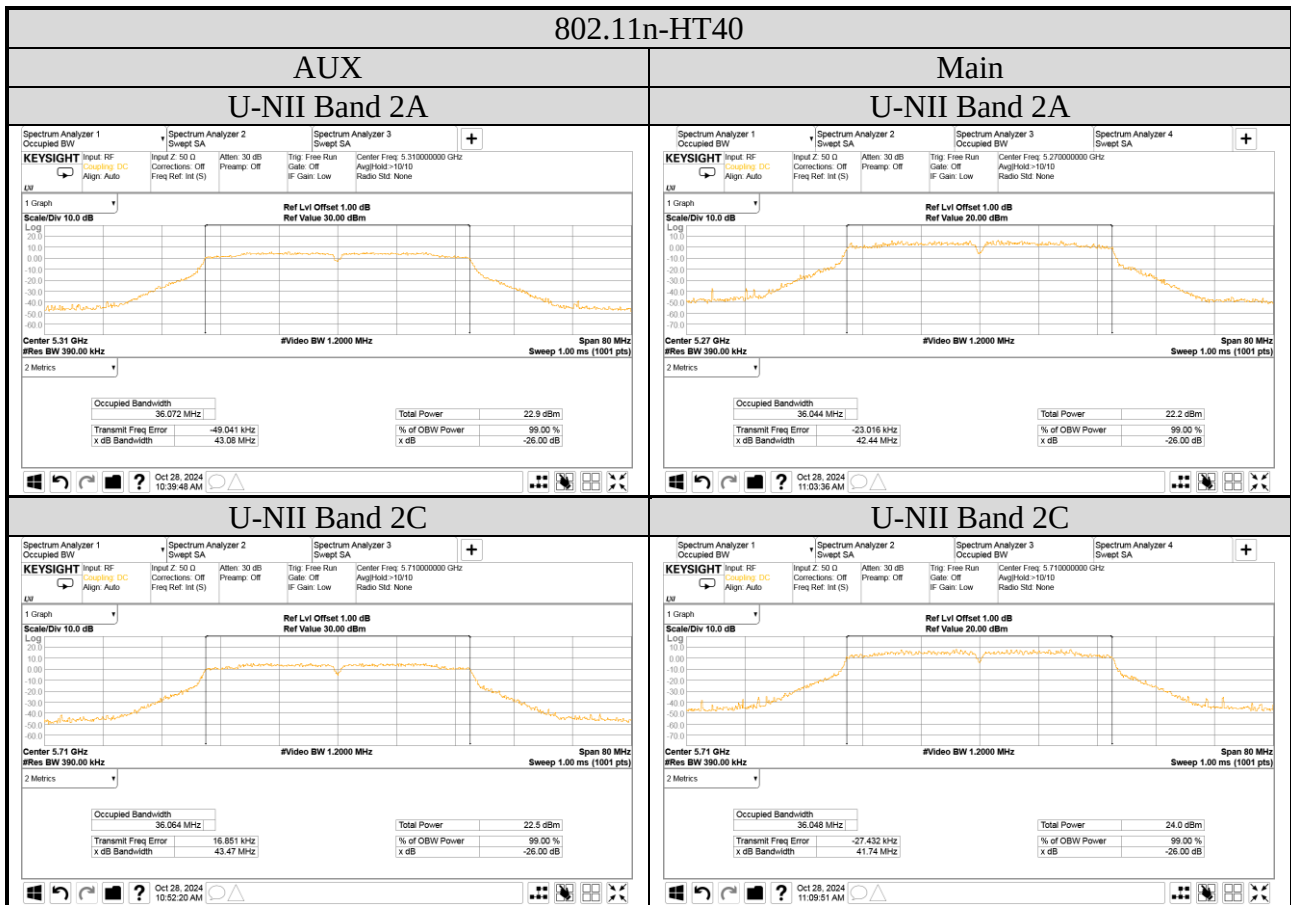


Note: We only presented max result (worst case) plots for each test mode

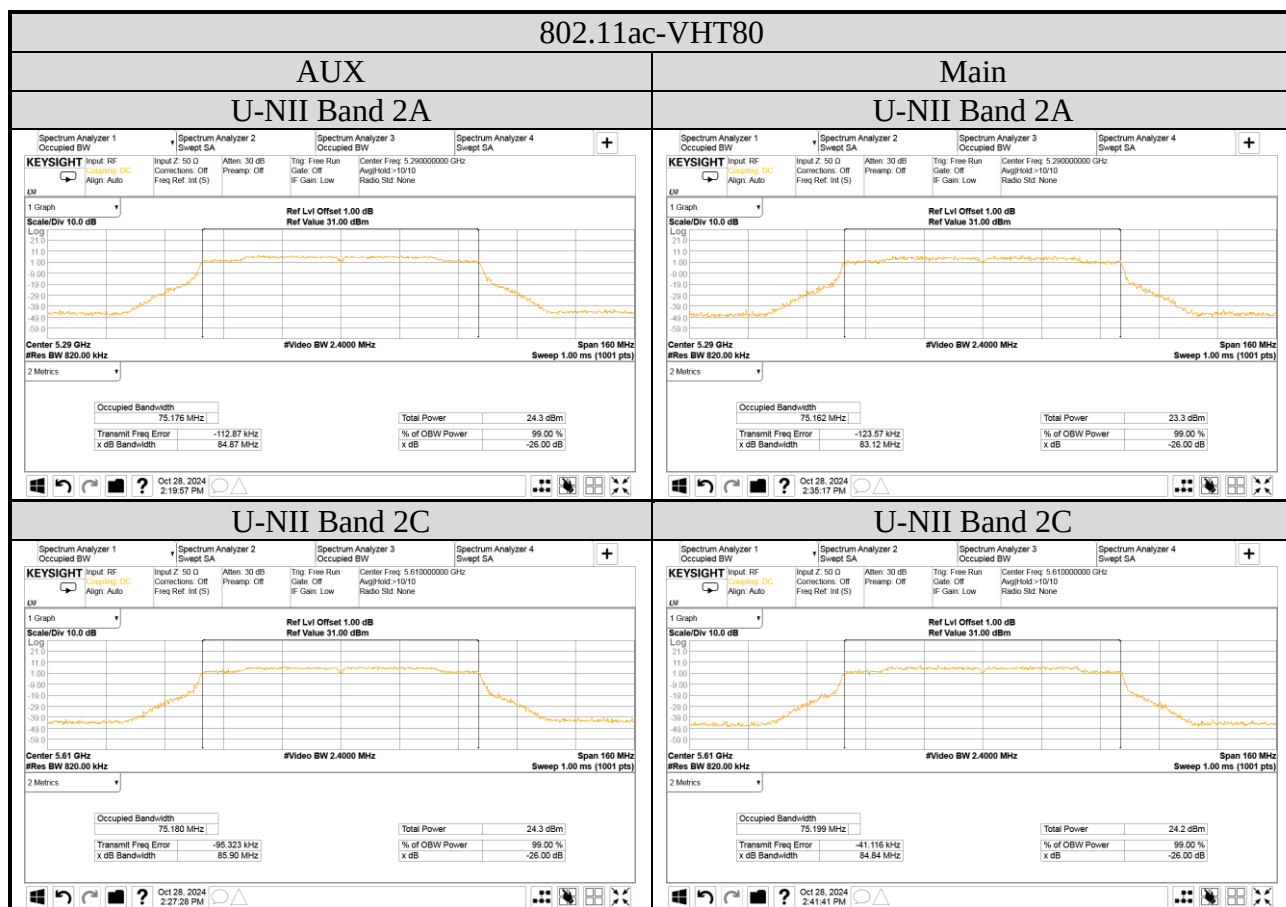


Note: We only presented max result (worst case) plots for each test mode

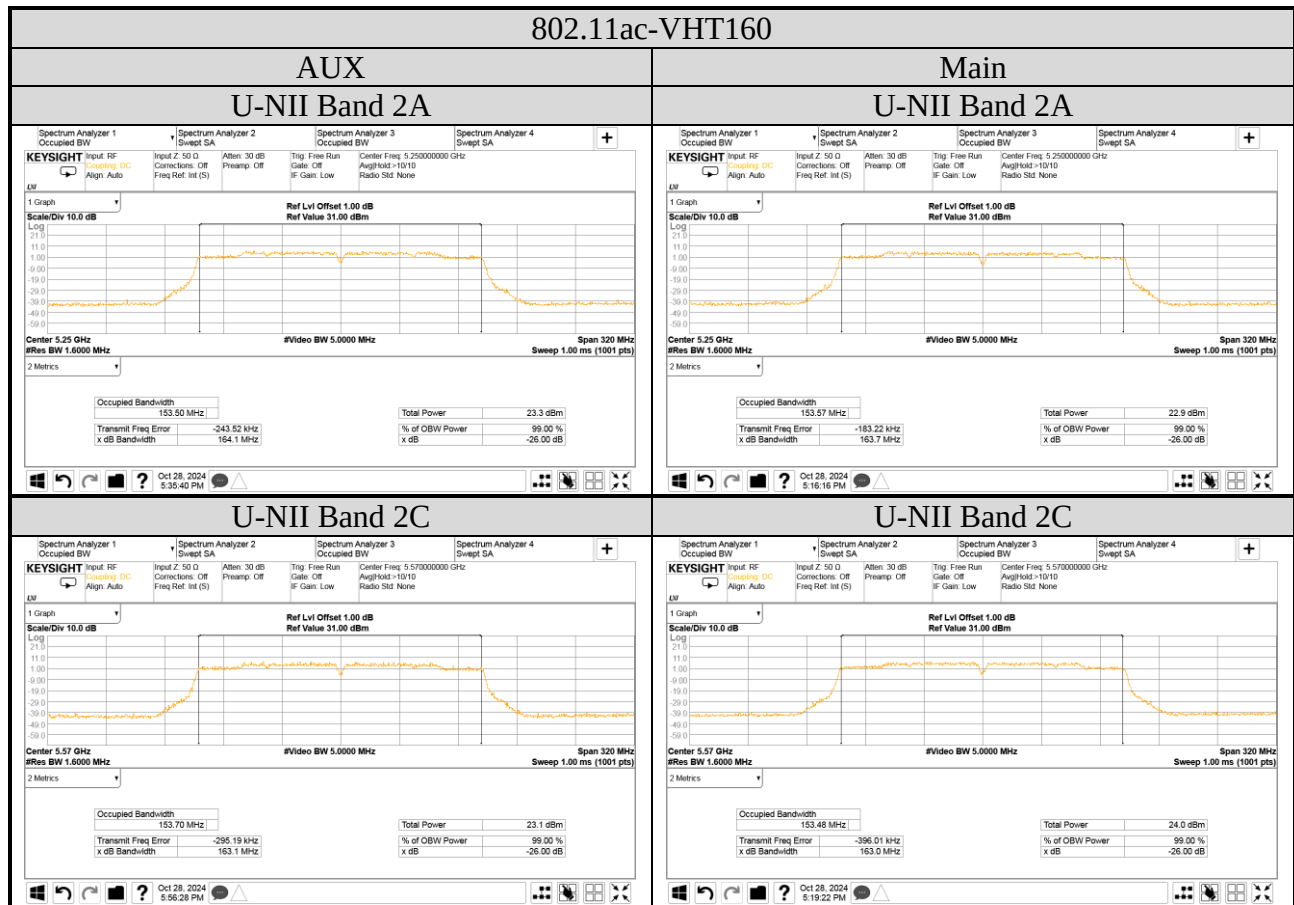


Note: We only presented max result (worst case) plots for each test mode

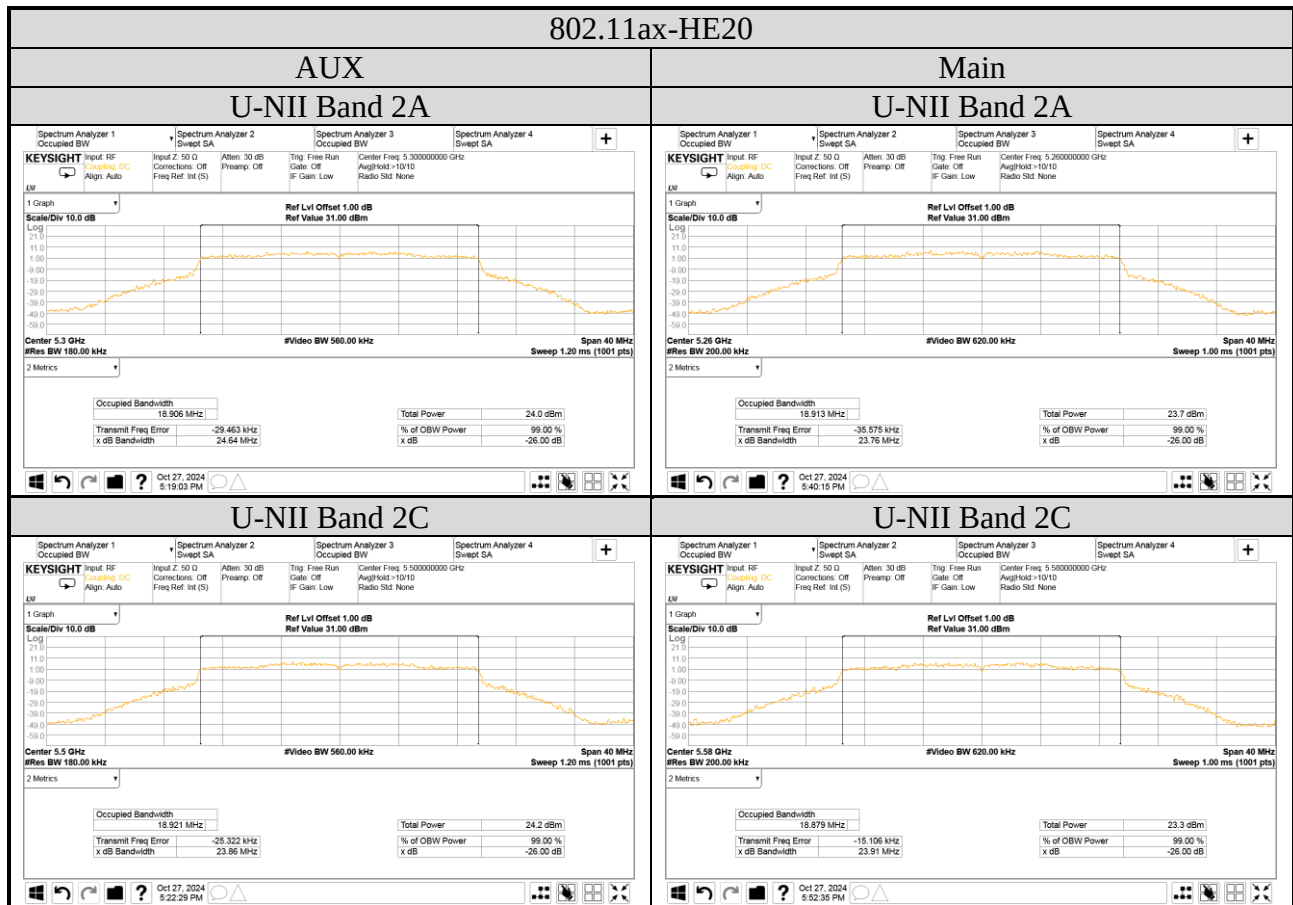


Note: We only presented max result (worst case) plots for each test mode

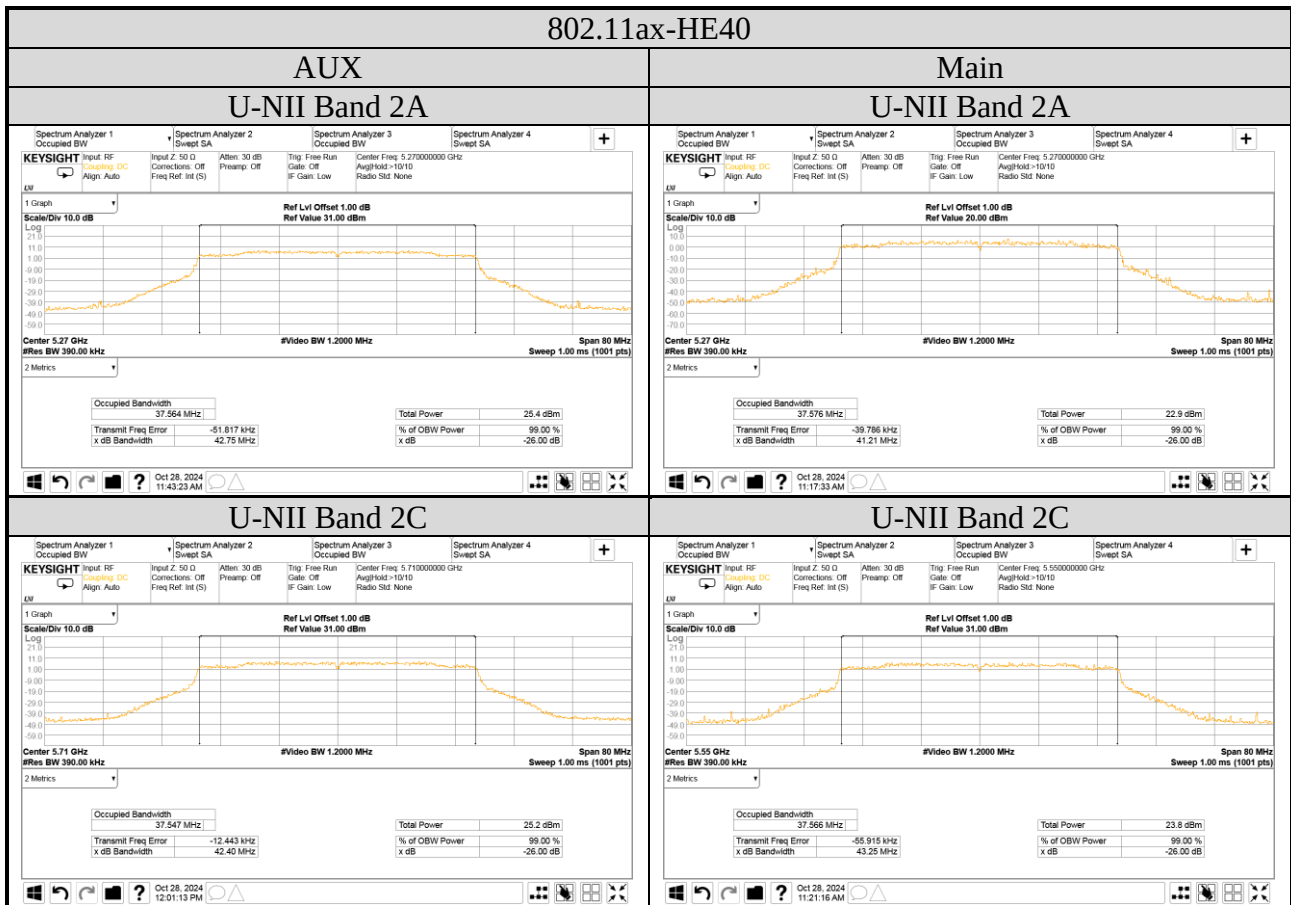


Note: We only presented max result (worst case) plots for each test mode

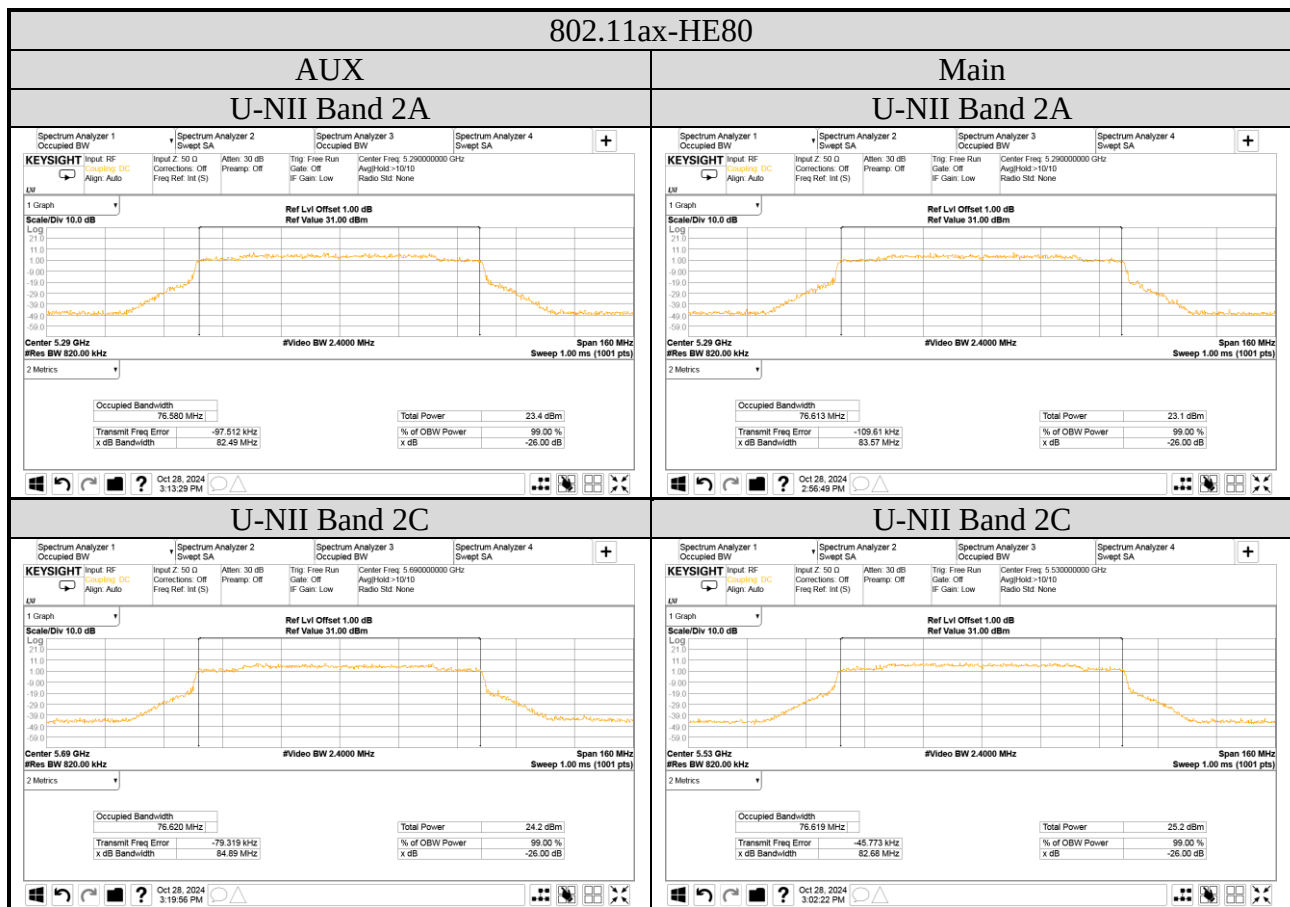


Note: We only presented max result (worst case) plots for each test mode

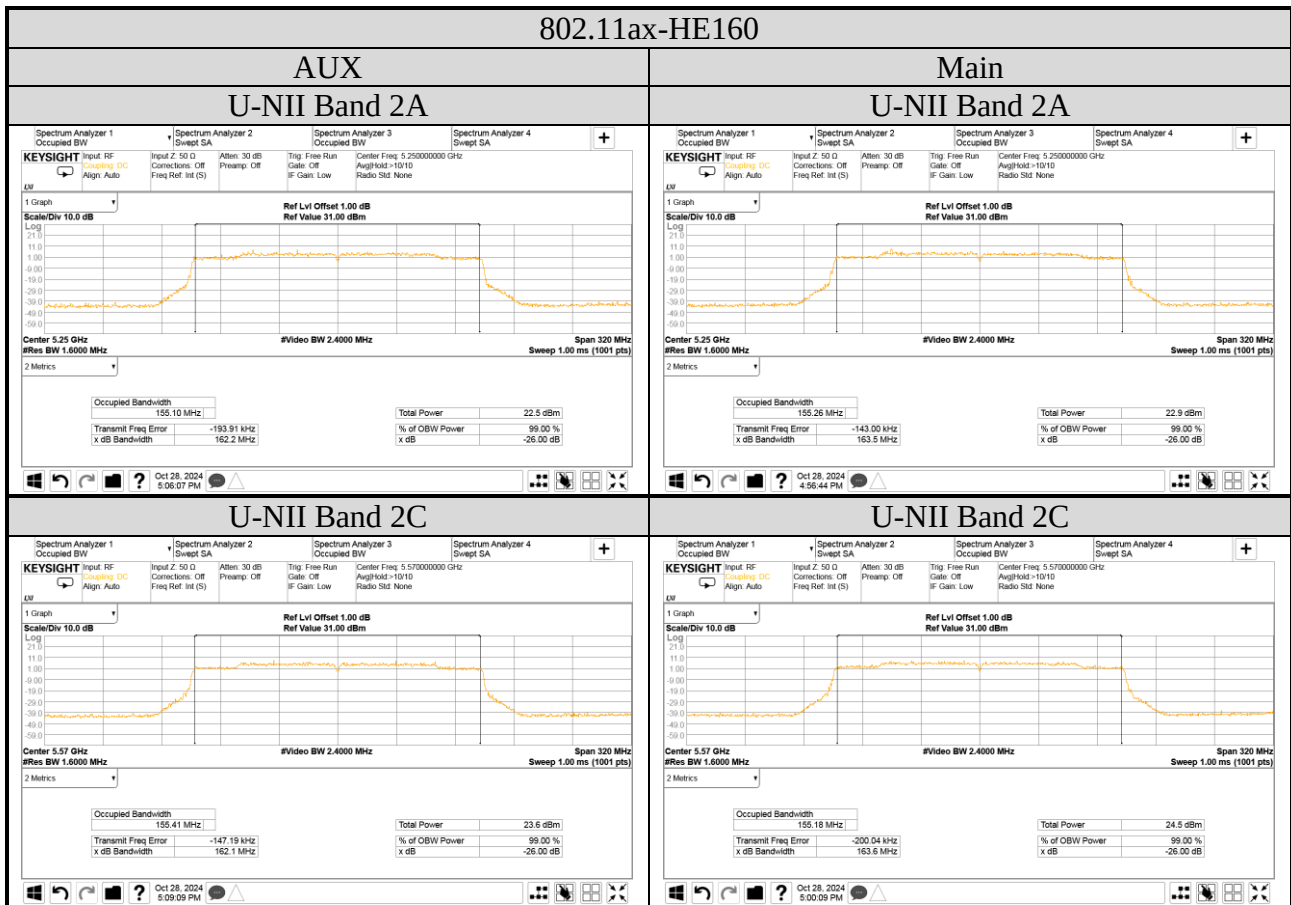

Note: We only presented max result (worst case) plots for each test mode

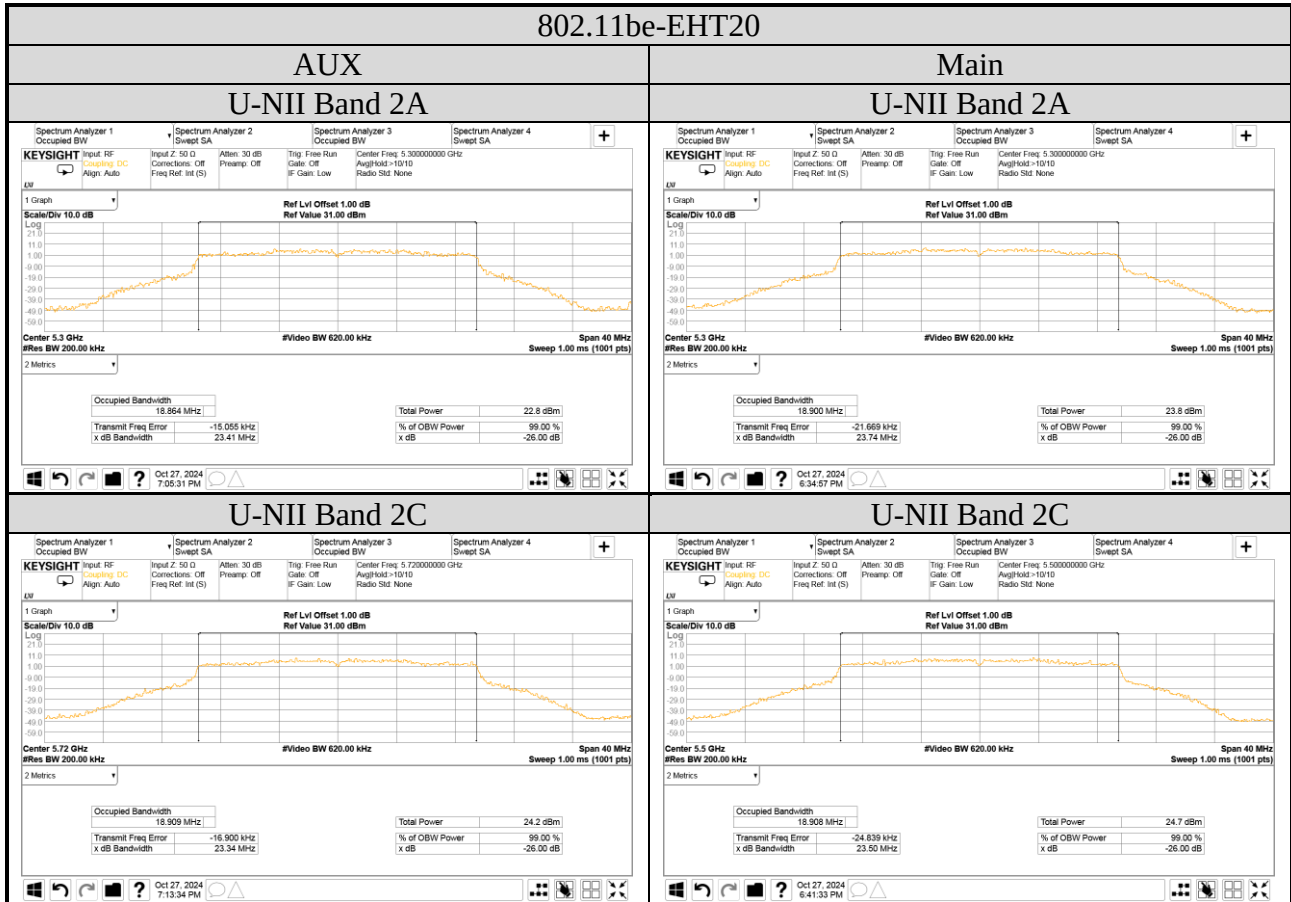


Note: We only presented max result (worst case) plots for each test mode

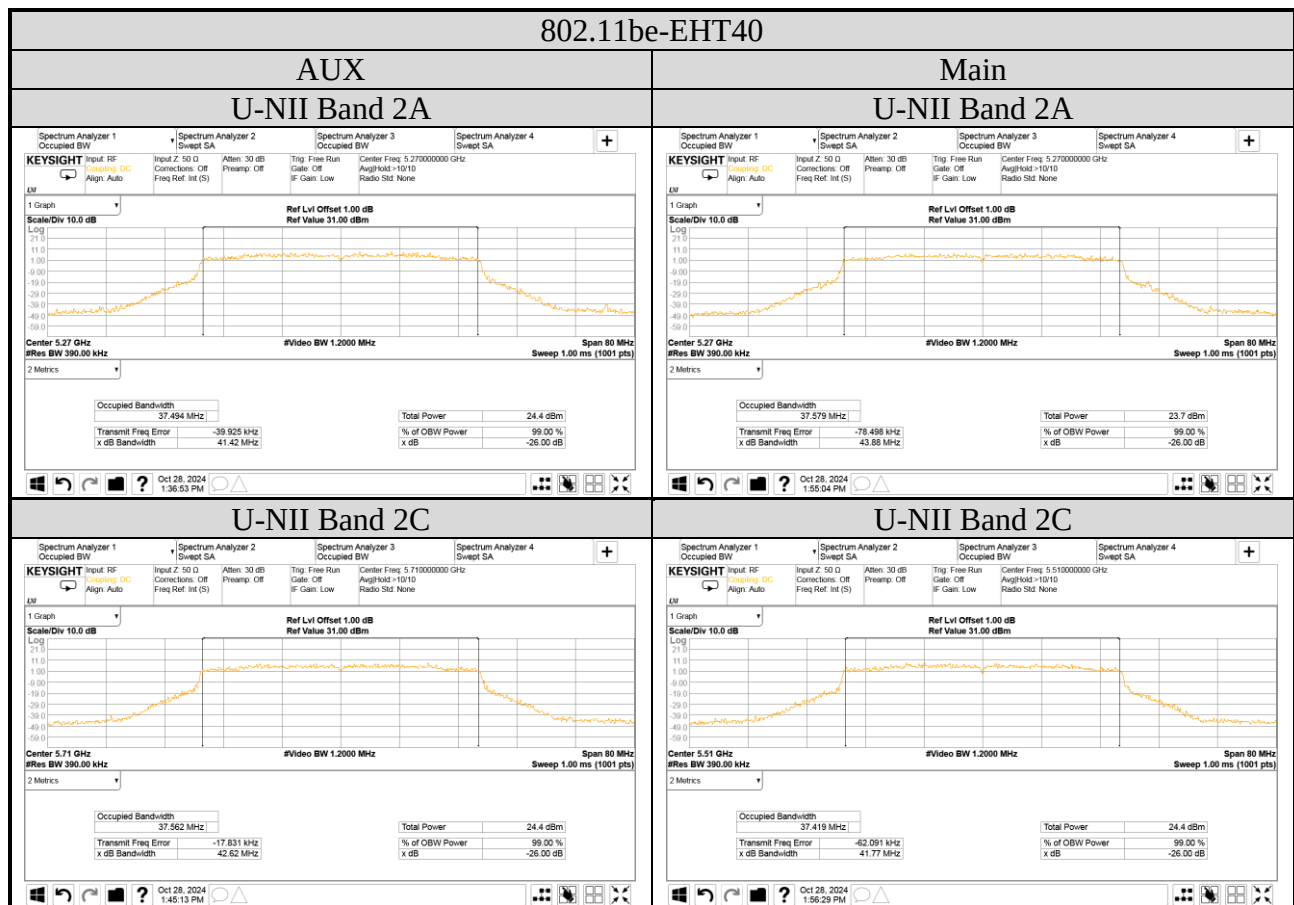


Note: We only presented max result (worst case) plots for each test mode

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

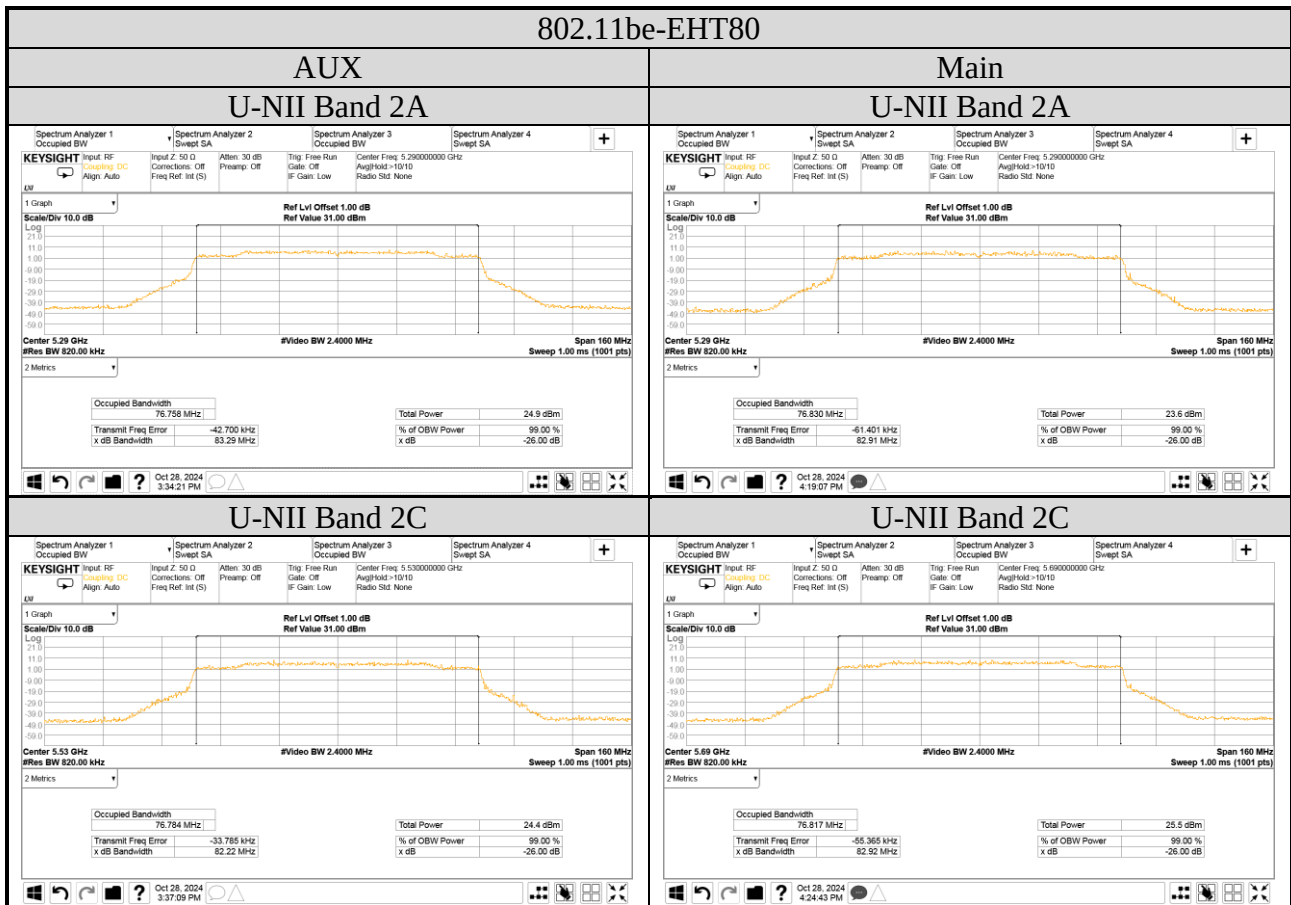

Note: We only presented max result (worst case) plots for each test mode

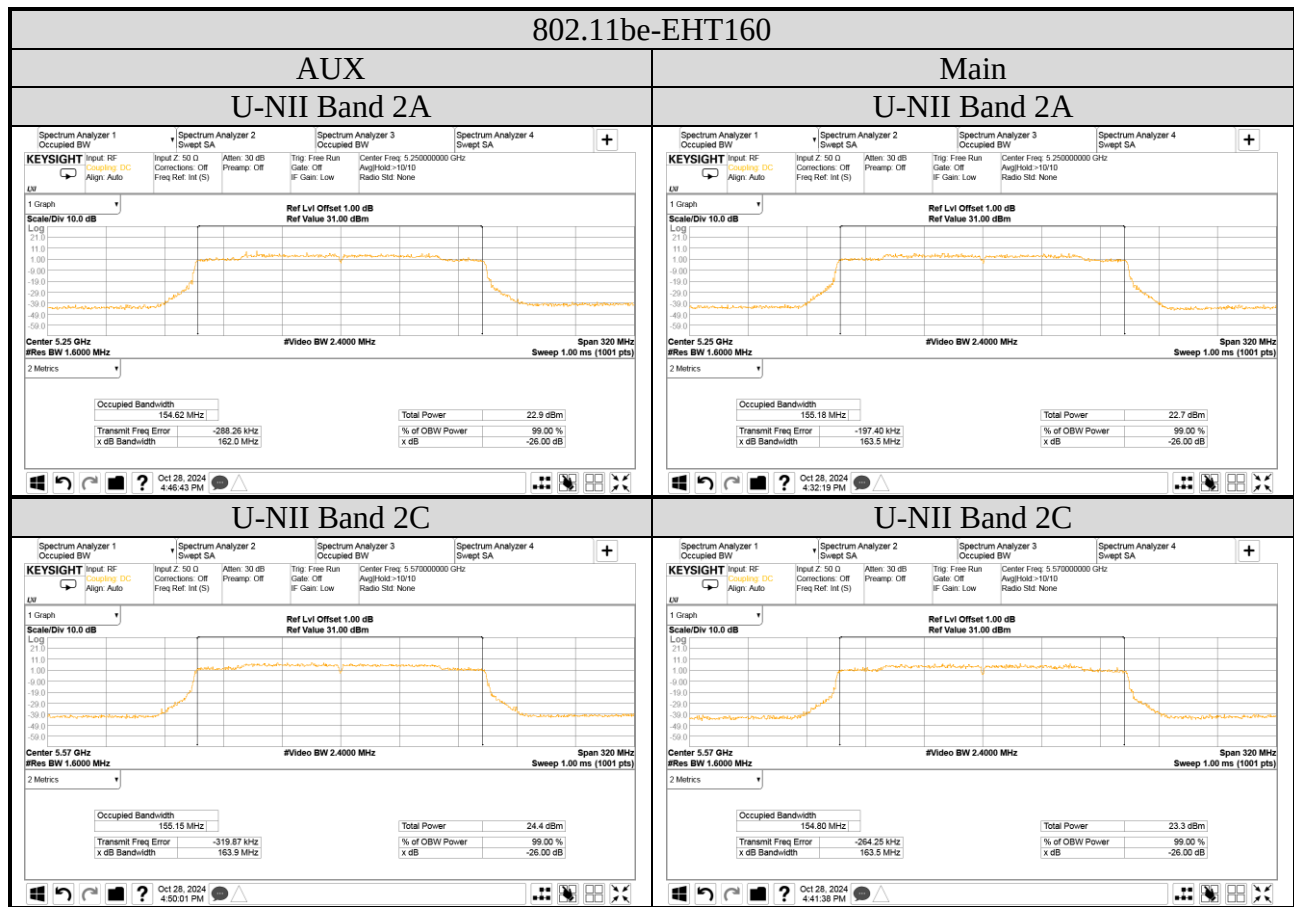

Note: We only presented max result (worst case) plots for each test mode