

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands	6
A.2.2 Emissions outside the frequency band:	209
A.2.3 Emissions in Non-restricted Frequency Bands:	216
A.3 DTS/OCCUPIED BANDWIDTH	217
A.3.1 DTS/Occupied Bandwidth Result	217
A.3.2 Measurement Plots	219
A.4 MAXIMUM PEAK OUTPUT POWER	227
A.4.1 Peak Output Power	227
A.4.2 Average Output Power (Reporting only)	233
A.5 EMISSION LIMITATIONS	239
A.6 POWER SPECTRAL DENSITY	273
A.6.1 Power Spectral Density Result	274
A.6.2 Measurement Plots	276

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Test SKU	With INPAQ Antenna		

File: C:\test_data\Report\2024\C1M2411XXX\C1M2411088-C-RF\C1M2411088-C-RF_00004.EMI

Date: 2024-11-28

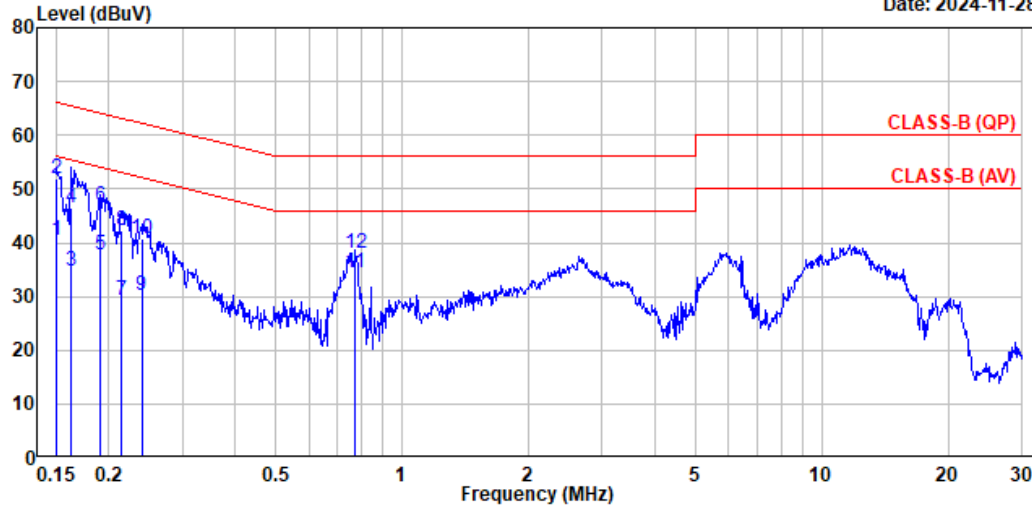

Site No. : No.7 Shielded Room
Instrument 1 : Receiver ESR(114)
Instrument 2 : ESH2-Z5 (366)(A)|CE-07|ESH3-Z2 (495)
Limit : CLASS-B (QP)
Environment : 21°C/52%
EUT Model : 16Z90TL
Test Mode : OPERATION
INPAQ

Data No. : 4
Phase : Neutral
Test Rating : 120ac/60Hz
Engineer : Byron Wu

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.17	0.05	9.86	30.44	40.52	56.00	15.48	Average
2	0.150	0.17	0.05	9.86	41.87	51.95	66.00	14.05	QP
3	0.163	0.17	0.05	9.86	24.73	34.81	55.30	20.49	Average
4	0.163	0.17	0.05	9.86	36.56	46.64	65.30	18.66	QP
5	0.191	0.17	0.05	9.87	27.76	37.85	53.97	16.12	Average
6	0.191	0.17	0.05	9.87	36.66	46.75	63.97	17.22	QP
7	0.214	0.17	0.05	9.87	19.33	29.42	53.06	23.64	Average
8	0.214	0.17	0.05	9.87	32.15	42.24	63.06	20.82	QP
9	0.240	0.17	0.05	9.87	20.14	30.23	52.11	21.88	Average
10	0.240	0.17	0.05	9.87	30.60	40.69	62.11	21.42	QP
11	0.773	0.19	0.06	9.87	24.17	34.29	46.00	11.71	Average
12	0.773	0.19	0.06	9.87	27.94	38.06	56.00	17.94	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Test SKU	With INPAQ Antenna		

File: C:\test_data\Report\2024\C1M2411XXX\C1M2411088-C-RF\C1M2411088-C-RF_00003.EMI

Date: 2024-11-28

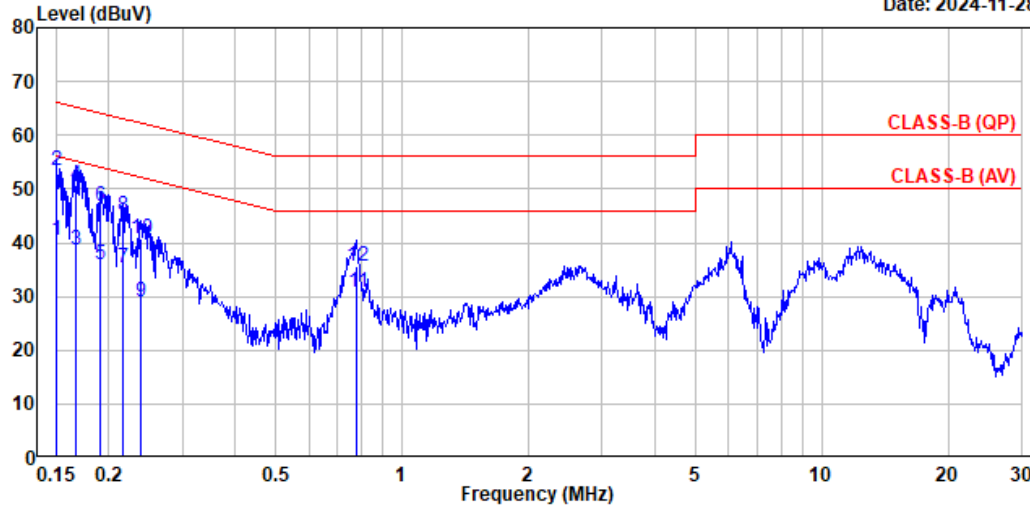

Site No. : No.7 Shielded Room
Instrument 1 : Receiver ESR(114)
Instrument 2 : ESH2-Z5 (366)(A)|CE-07|ESH3-Z2 (495)
Limit : CLASS-B (QP)
Environment : 21°C/52%
EUT Model : 16Z90TL
Test Mode : OPERATION
INPAQ

Data No. : 3
Phase : Line
Test Rating : 120ac/60Hz
Engineer : Byron Wu

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.14	0.05	9.86	30.48	40.53	56.00	15.47	Average
2	0.150	0.14	0.05	9.86	43.43	53.48	66.00	12.52	QP
3	0.167	0.14	0.05	9.86	28.63	38.68	55.09	16.41	Average
4	0.167	0.14	0.05	9.86	40.81	50.86	65.09	14.23	QP
5	0.191	0.14	0.05	9.87	25.76	35.82	54.01	18.19	Average
6	0.191	0.14	0.05	9.87	36.82	46.88	64.01	17.13	QP
7	0.217	0.14	0.05	9.87	25.37	35.43	52.94	17.51	Average
8	0.217	0.14	0.05	9.87	35.05	45.11	62.94	17.83	QP
9	0.238	0.14	0.05	9.87	18.94	29.00	52.15	23.15	Average
10	0.238	0.14	0.05	9.87	30.55	40.61	62.15	21.54	QP
11	0.781	0.18	0.06	9.87	20.74	30.85	46.00	15.15	Average
12	0.781	0.18	0.06	9.87	25.60	35.71	56.00	20.29	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Test SKU	With LUXSHARE-ICT Antenna		

File: C:\test_data\Report\2024\C1M2411XXX\C1M2411088-C-RF\C1M2411088-C-RF_00002.EMI

Date: 2024-11-28

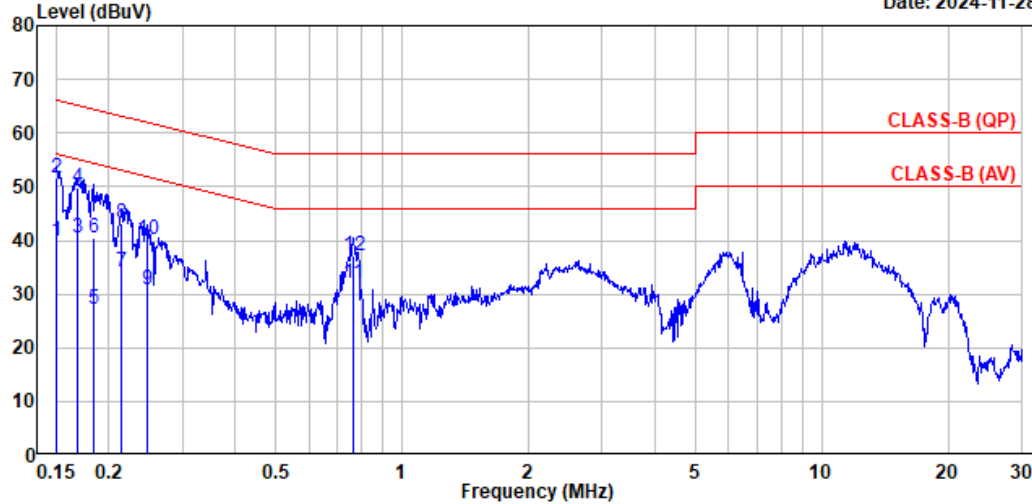

Site No.	: No.7 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ESH2-Z5 (366)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 21°C/52%	Test Rating	: 120ac/60Hz
EUT Model	: 16Z90TL	Engineer	: Byron Wu
Test Mode	: OPERATION		
	LUXSHARE		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	0.17	0.05	9.86	29.69	39.77	55.96	16.19	Average
2	0.151	0.17	0.05	9.86	41.45	51.53	65.96	14.43	QP
3	0.168	0.17	0.05	9.86	30.33	40.41	55.05	14.64	Average
4	0.168	0.17	0.05	9.86	39.82	49.90	65.05	15.15	QP
5	0.184	0.17	0.05	9.87	16.97	27.06	54.30	27.24	Average
6	0.184	0.17	0.05	9.87	30.25	40.34	64.30	23.96	QP
7	0.215	0.17	0.05	9.87	24.03	34.12	53.02	18.90	Average
8	0.215	0.17	0.05	9.87	33.15	43.24	63.02	19.78	QP
9	0.248	0.17	0.05	9.86	20.62	30.70	51.82	21.12	Average
10	0.248	0.17	0.05	9.86	30.08	40.16	61.82	21.66	QP
11	0.765	0.19	0.06	9.87	21.74	31.86	46.00	14.14	Average
12	0.765	0.19	0.06	9.87	27.15	37.27	56.00	18.73	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Test SKU	With LUXSHARE-ICT Antenna		

File: C:\test_data\Report\2024\C1M2411XXX\C1M2411088-C-RF\C1M2411088-C-RF_00001.EMI

Date: 2024-11-28

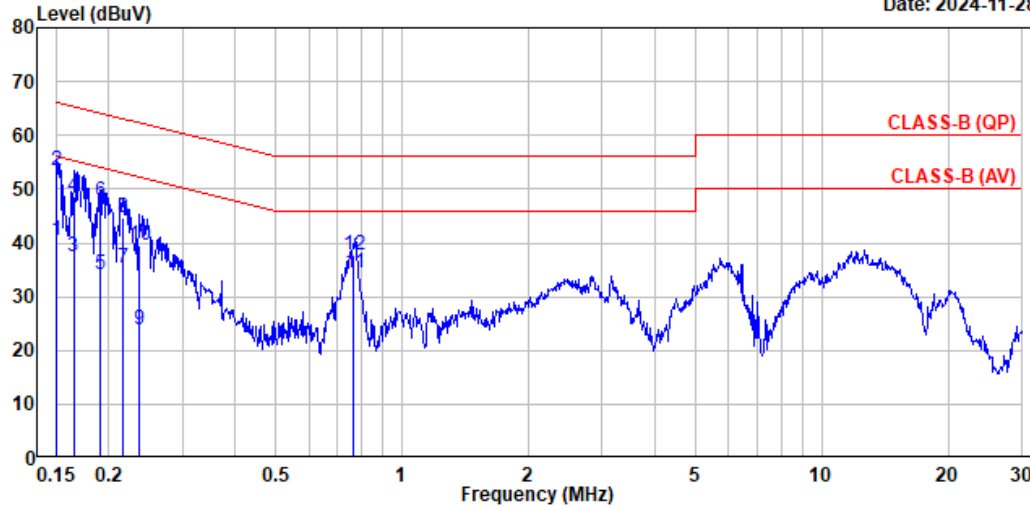

Site No. : No.7 Shielded Room
Instrument 1 : Receiver ESR(114)
Instrument 2 : ESH2-Z5 (366)(A)|CE-07|ESH3-Z2 (495)
Limit : CLASS-B (QP)
Environment : 21°C/52%
EUT Model : 16Z90TL
Test Mode : OPERATION
LUXSHARE

Data No. : 1
Phase : Line
Test Rating : 120ac/60Hz
Engineer : Byron Wu

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.14	0.05	9.86	30.42	40.47	56.00	15.53	Average
2	0.150	0.14	0.05	9.86	43.36	53.41	66.00	12.59	QP
3	0.165	0.14	0.05	9.86	27.39	37.44	55.21	17.77	Average
4	0.165	0.14	0.05	9.86	38.54	48.59	65.21	16.62	QP
5	0.191	0.14	0.05	9.87	24.18	34.24	53.97	19.73	Average
6	0.191	0.14	0.05	9.87	37.51	47.57	63.97	16.40	QP
7	0.216	0.14	0.05	9.87	25.16	35.22	52.98	17.76	Average
8	0.216	0.14	0.05	9.87	34.63	44.69	62.98	18.29	QP
9	0.237	0.14	0.05	9.87	13.69	23.75	52.19	28.44	Average
10	0.237	0.14	0.05	9.87	29.60	39.66	62.19	22.53	QP
11	0.769	0.18	0.06	9.87	24.36	34.47	46.00	11.53	Average
12	0.769	0.18	0.06	9.87	27.56	37.67	56.00	18.33	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/11/25~12/13	Temp./Hum.	22~24°C/54~58%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz.

● With INPAQ Antenna

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	22.30	1.30	26.51	37.47	34.55	40.00	5.45	Peak
158.500	16.39	2.96	25.98	35.90	29.28	43.50	14.22	Peak
378.000	21.16	5.28	26.34	32.56	32.67	46.00	13.33	Peak
673.500	24.65	7.16	27.40	28.77	33.18	46.00	12.82	Peak
844.000	25.62	8.30	27.17	27.77	34.52	46.00	11.48	Peak
972.500	26.82	9.12	26.83	26.90	36.01	54.00	17.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.98	1.31	26.51	37.83	34.61	40.00	5.39	Peak
158.500	16.39	2.96	25.98	36.69	30.07	43.50	13.43	Peak
378.000	21.16	5.28	26.34	31.34	31.44	46.00	14.56	Peak
690.000	24.70	7.25	27.40	27.73	32.28	46.00	13.72	Peak
862.500	25.76	8.44	27.13	26.94	34.01	46.00	11.99	Peak
990.500	27.01	9.22	26.79	26.78	36.22	54.00	17.78	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.98	1.31	26.51	38.05	34.83	40.00	5.17	Peak
160.500	16.30	2.99	25.97	35.65	28.97	43.50	14.53	Peak
378.000	21.16	5.28	26.34	32.39	32.49	46.00	13.51	Peak
708.000	24.78	7.36	27.39	26.97	31.71	46.00	14.29	Peak
865.500	25.78	8.46	27.12	26.59	33.72	46.00	12.28	Peak
988.000	26.98	9.21	26.79	27.20	36.60	54.00	17.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.98	1.31	26.51	38.03	34.81	40.00	5.19	Peak
162.000	16.24	3.00	25.96	35.77	29.05	43.50	14.45	Peak
378.000	21.16	5.28	26.34	31.17	31.28	46.00	14.72	Peak
710.500	24.79	7.37	27.39	27.59	32.37	46.00	13.63	Peak
867.000	25.79	8.48	27.12	27.34	34.49	46.00	11.51	Peak
974.500	26.85	9.14	26.83	27.22	36.38	54.00	17.62	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **With LUXSHARE-ICT Antenna**

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.55	1.45	26.50	38.16	34.66	40.00	5.34	Peak
123.000	17.79	2.78	26.17	33.53	27.93	43.50	15.57	Peak
158.500	15.68	3.15	25.99	37.39	30.22	43.50	13.28	Peak
378.000	20.60	5.54	26.36	31.73	31.51	46.00	14.49	Peak
457.000	22.12	6.30	26.94	27.51	28.99	46.00	17.01	Peak
558.000	23.57	6.74	27.38	27.40	30.34	46.00	15.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.55	1.45	26.50	38.50	35.01	40.00	4.99	Peak
122.500	17.81	2.78	26.18	34.73	29.14	43.50	14.36	Peak
158.500	15.68	3.15	25.99	37.46	30.29	43.50	13.21	Peak
378.000	20.60	5.54	26.36	32.83	32.61	46.00	13.39	Peak
486.000	22.61	6.53	27.13	28.61	30.62	46.00	15.38	Peak
596.000	24.02	6.80	27.47	27.95	31.31	46.00	14.69	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.44	26.50	38.33	35.13	40.00	4.87	Peak
123.500	17.76	2.79	26.17	33.34	27.72	43.50	15.78	Peak
159.000	15.64	3.15	25.99	37.58	30.37	43.50	13.13	Peak
210.000	15.55	3.65	25.81	34.17	27.56	43.50	15.94	Peak
378.000	20.60	5.54	26.36	31.71	31.49	46.00	14.51	Peak
457.500	22.14	6.30	26.95	27.38	28.88	46.00	17.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.44	26.50	37.25	34.05	40.00	5.95	Peak
123.000	17.79	2.78	26.17	32.98	27.38	43.50	16.12	Peak
162.500	15.48	3.19	25.98	38.05	30.74	43.50	12.76	Peak
205.500	15.25	3.60	25.82	34.88	27.92	43.50	15.58	Peak
378.000	20.60	5.54	26.36	31.04	30.82	46.00	15.18	Peak
461.500	22.21	6.33	26.97	28.46	30.04	46.00	15.96	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


- With INPAQ Antenna
- Wireless LAN Mode

● Mode	802.11b	Frequency	TX 2412MHz
--------	---------	-----------	------------

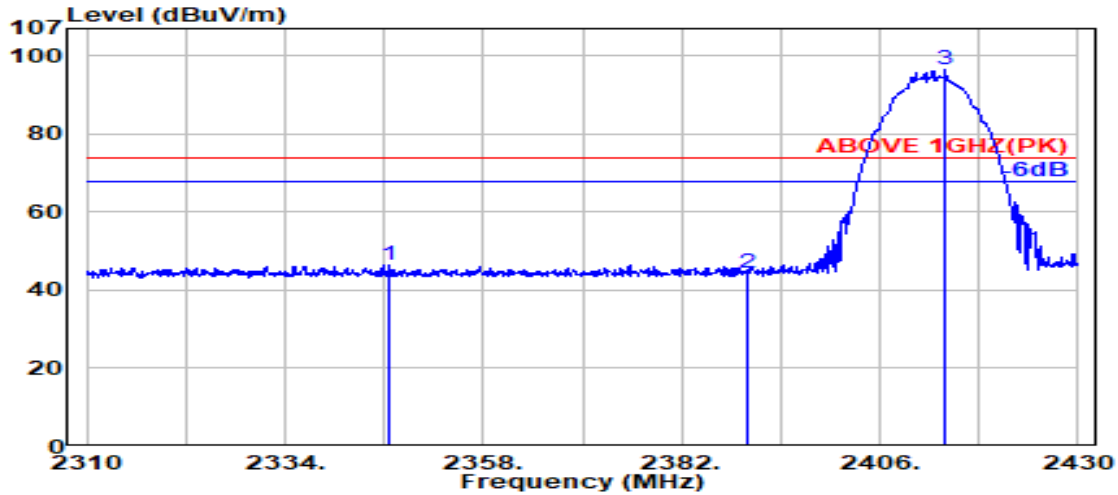

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2346.500	28.47	5.97	34.49	46.53	46.48	74.00	27.52	Peak
2390.000	28.18	6.03	34.50	44.81	44.52	74.00	29.48	Peak
@ 2414.000	28.18	6.07	34.50	96.55	96.30	---	---	Peak

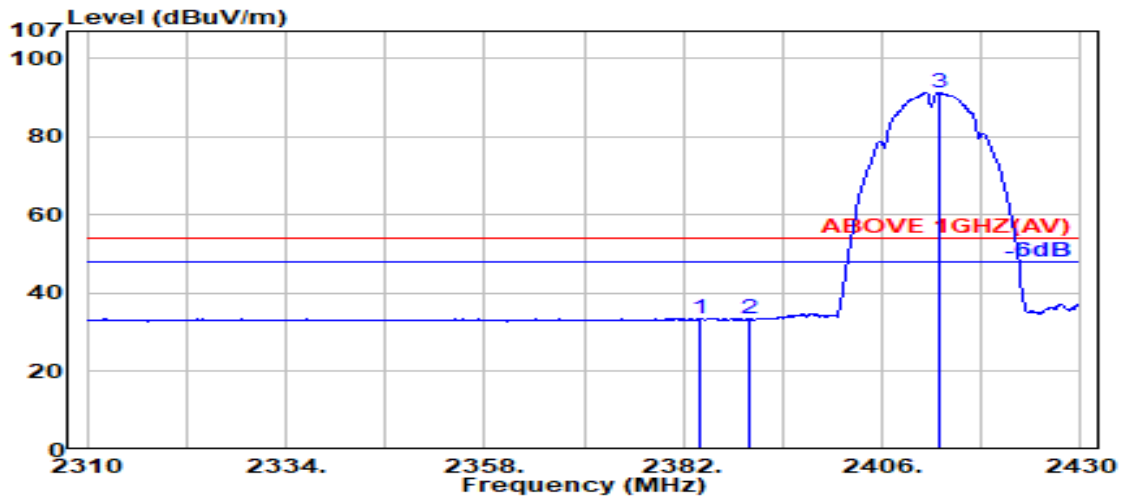

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.100	28.23	6.03	34.50	33.91	33.66	54.00	20.34	Average
2390.000	28.18	6.03	34.50	33.63	33.35	54.00	20.65	Average
@ 2412.800	28.18	6.07	34.50	91.63	91.37	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

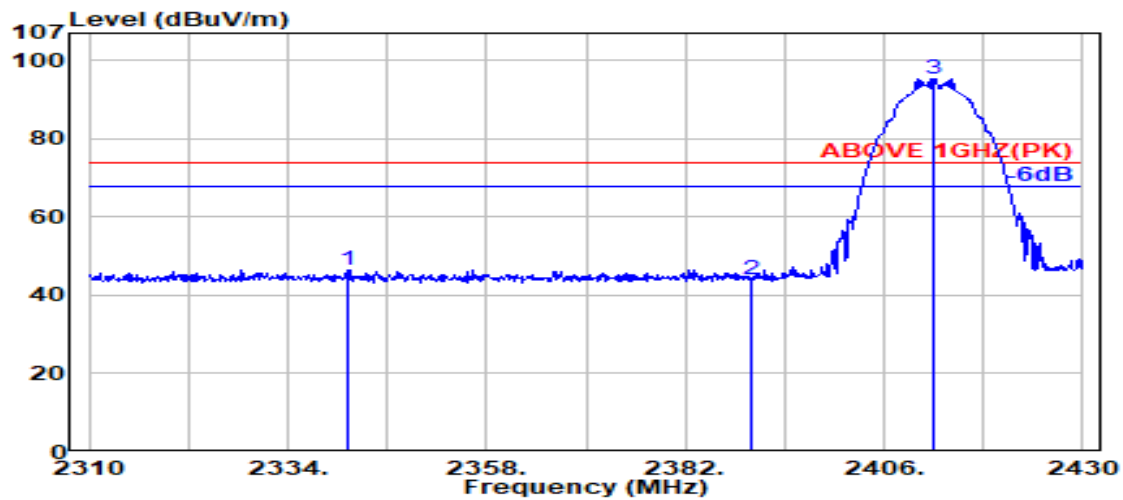

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.300	28.43	5.96	34.49	46.71	46.62	74.00	27.38	Peak
2390.000	28.18	6.03	34.50	44.38	44.10	74.00	29.90	Peak
@ 2412.000	28.17	6.07	34.50	95.56	95.30	---	---	Peak

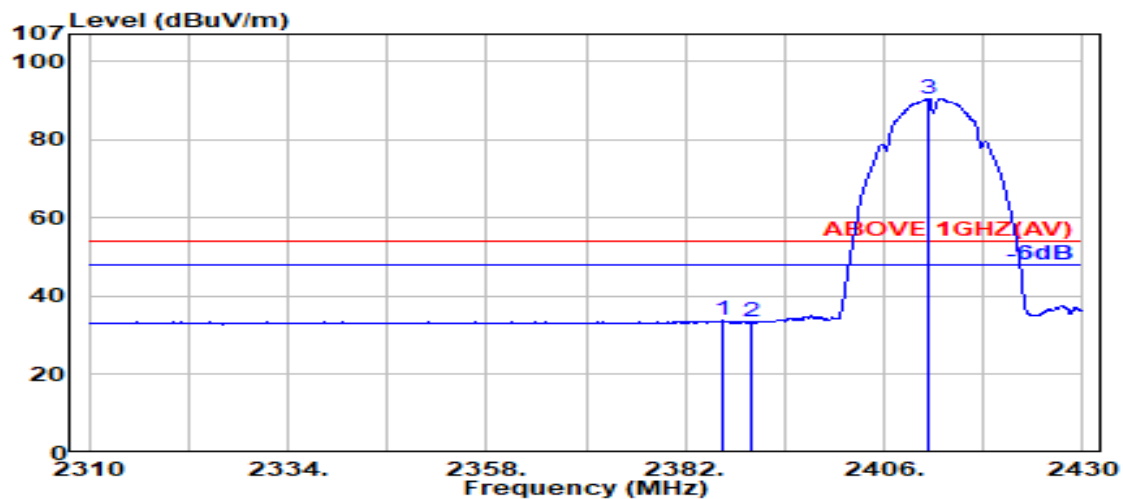

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.400	28.21	6.03	34.50	34.01	33.75	54.00	20.25	Average
2390.000	28.18	6.03	34.50	33.60	33.32	54.00	20.68	Average
@ 2411.200	28.17	6.07	34.50	90.90	90.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

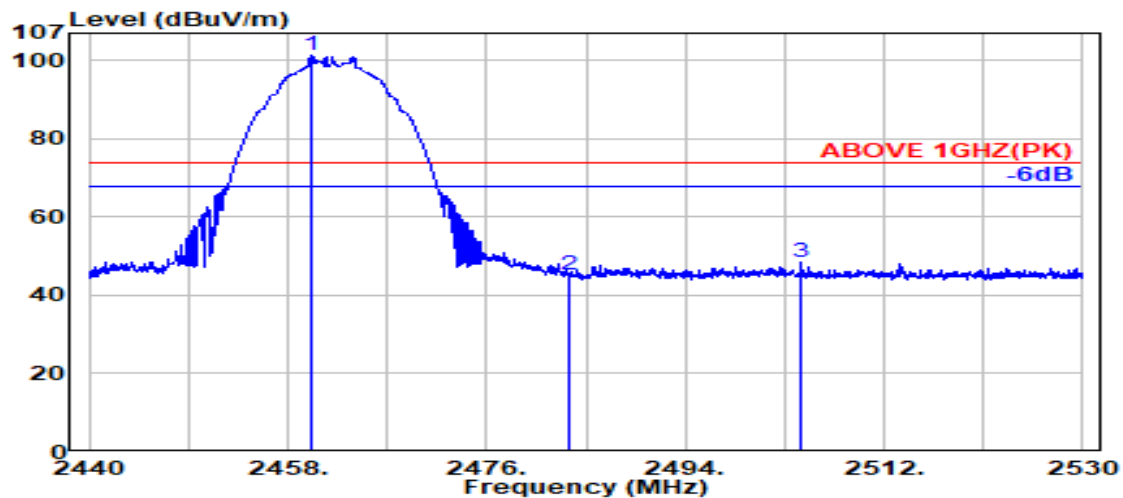

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	28.42	6.13	34.51	101.10	101.15	---	---	Peak
2483.500	28.47	6.17	34.52	45.09	45.20	74.00	28.80	Peak
2504.500	28.53	6.20	34.52	48.21	48.41	74.00	25.59	Peak

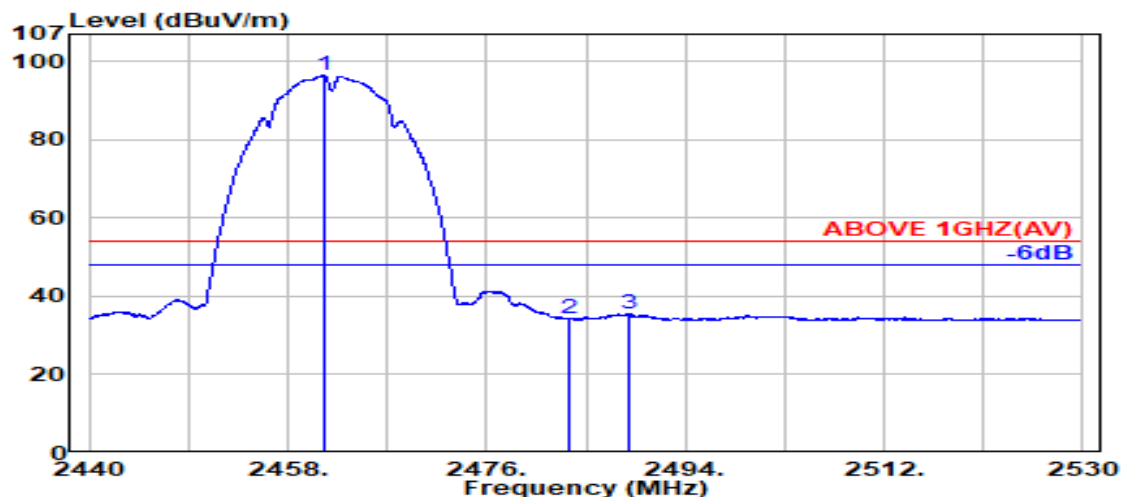

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.42	6.14	34.51	96.43	96.48	---	---	Average
2483.500	28.47	6.17	34.52	34.09	34.21	54.00	19.79	Average
2489.000	28.48	6.17	34.52	35.40	35.54	54.00	18.46	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

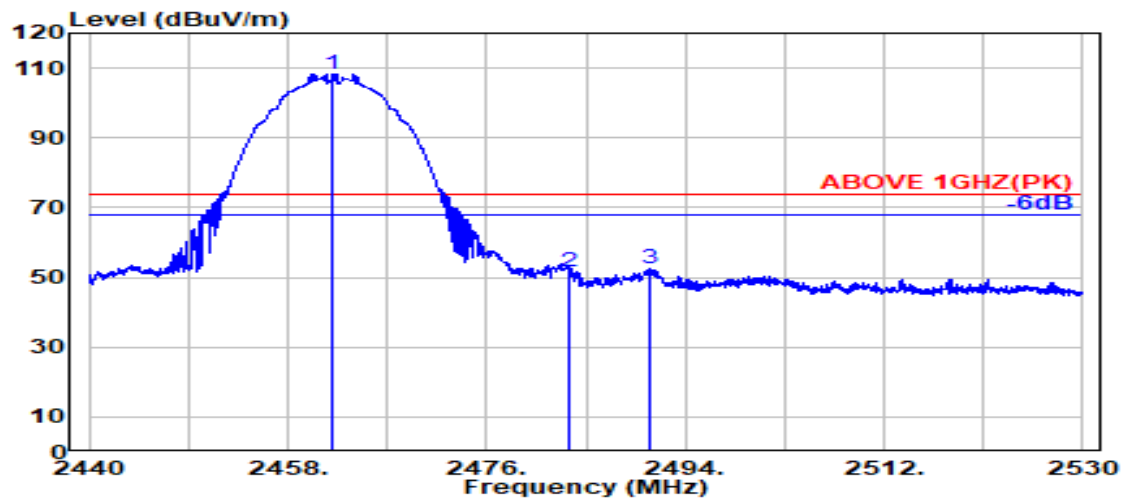

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.100	28.42	6.14	34.51	108.25	108.30	---	---	Peak
2483.500	28.47	6.17	34.52	51.56	51.68	74.00	22.32	Peak
2490.700	28.48	6.18	34.52	52.22	52.36	74.00	21.64	Peak

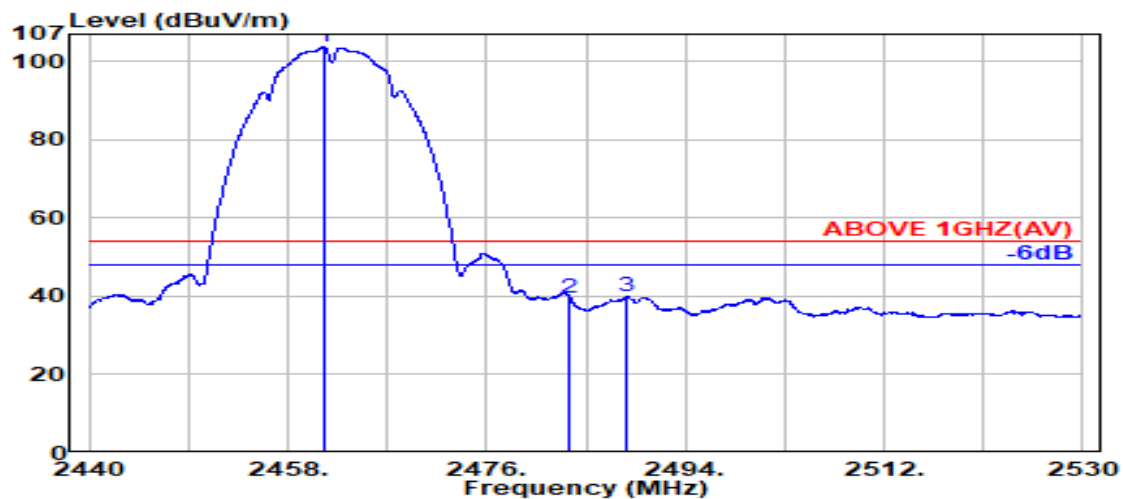

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.42	6.14	34.51	103.66	103.71	---	---	Average
2483.500	28.47	6.17	34.52	39.63	39.75	54.00	14.25	Average
2488.600	28.48	6.17	34.52	39.74	39.87	54.00	14.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

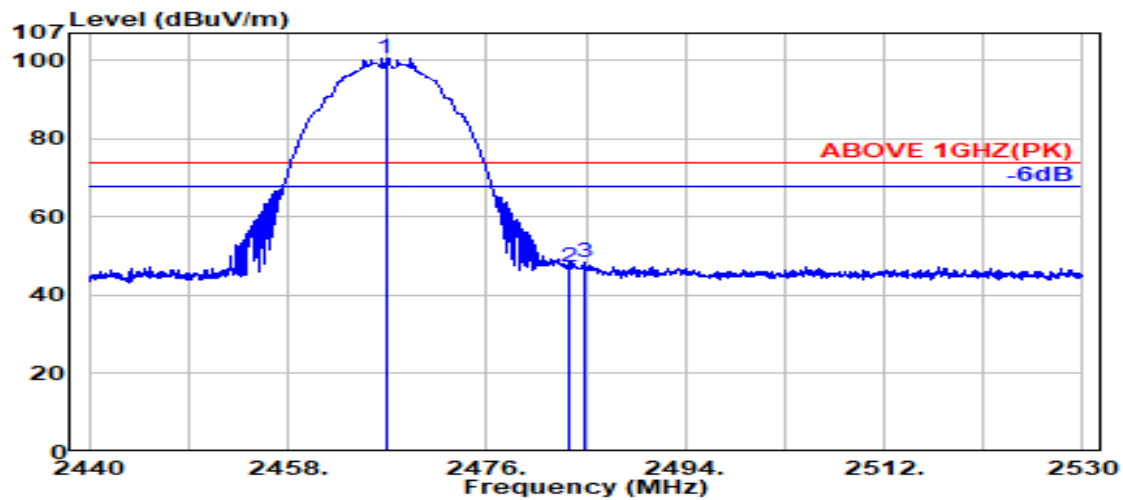

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.850	28.43	6.14	34.51	100.65	100.72	---	---	Peak
2483.500	28.47	6.17	34.52	47.25	47.37	74.00	26.63	Peak
2484.800	28.47	6.17	34.52	48.19	48.31	74.00	25.69	Peak

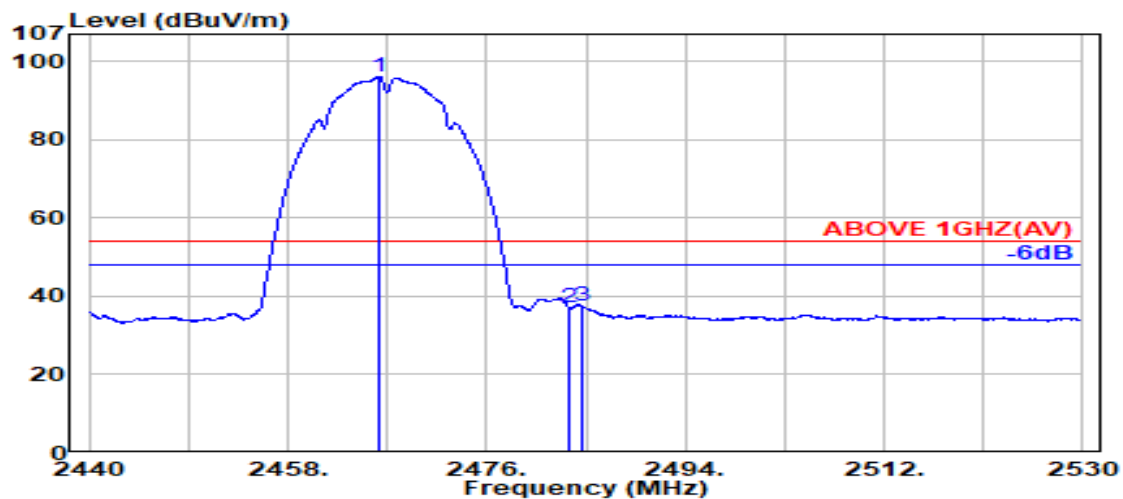

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	95.99	96.05	---	---	Average
2483.500	28.47	6.17	34.52	37.01	37.13	54.00	16.87	Average
2484.550	28.47	6.17	34.52	37.45	37.57	54.00	16.43	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

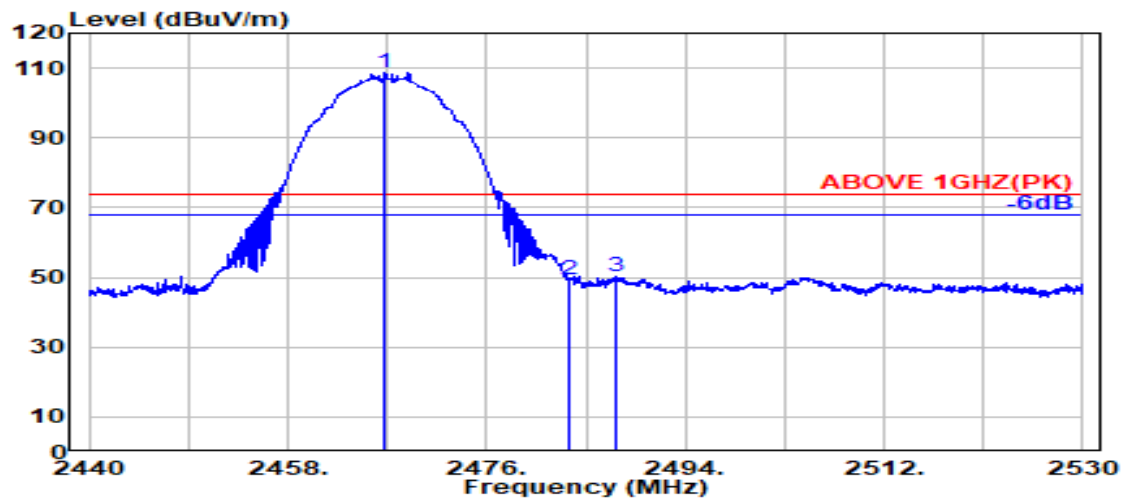

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.800	28.43	6.14	34.51	108.55	108.62	---	---	Peak
	2483.500	28.47	6.17	34.52	49.07	49.18	74.00	24.82	Peak
	2487.750	28.48	6.17	34.52	50.18	50.31	74.00	23.69	Peak

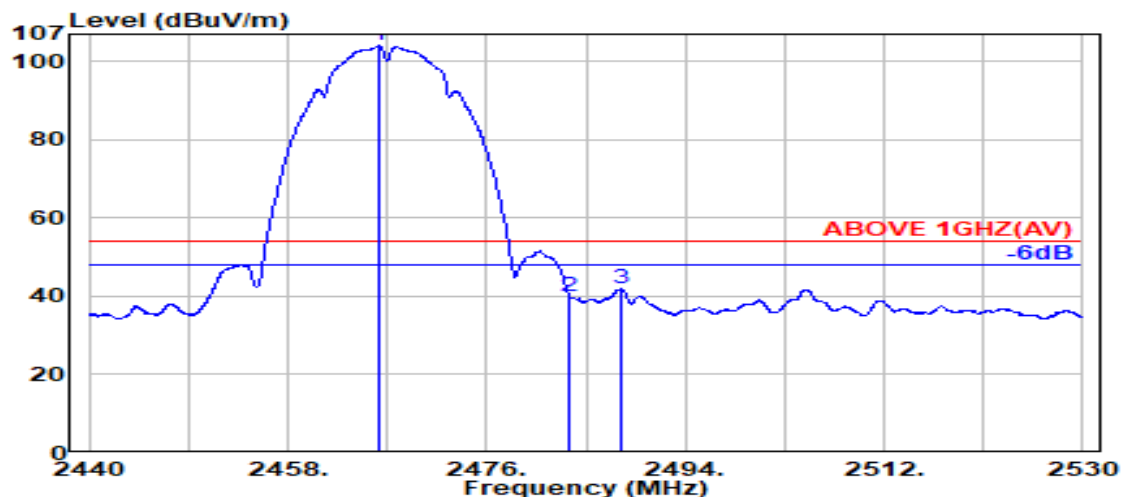

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.250	28.43	6.14	34.51	103.98	104.04	---	---	Average
	2483.500	28.47	6.17	34.52	39.89	40.01	54.00	13.99	Average
	2488.200	28.48	6.17	34.52	41.71	41.85	54.00	12.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

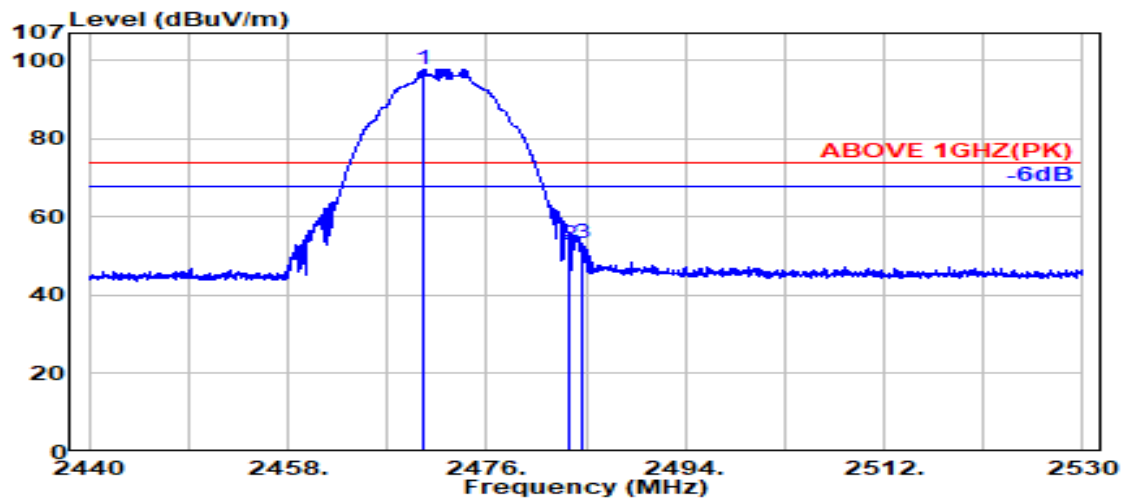

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.200	28.44	6.15	34.51	97.79	97.86	---	---	Peak
2483.500	28.47	6.17	34.52	52.82	52.94	74.00	21.06	Peak
2484.650	28.47	6.17	34.52	53.17	53.29	74.00	20.71	Peak

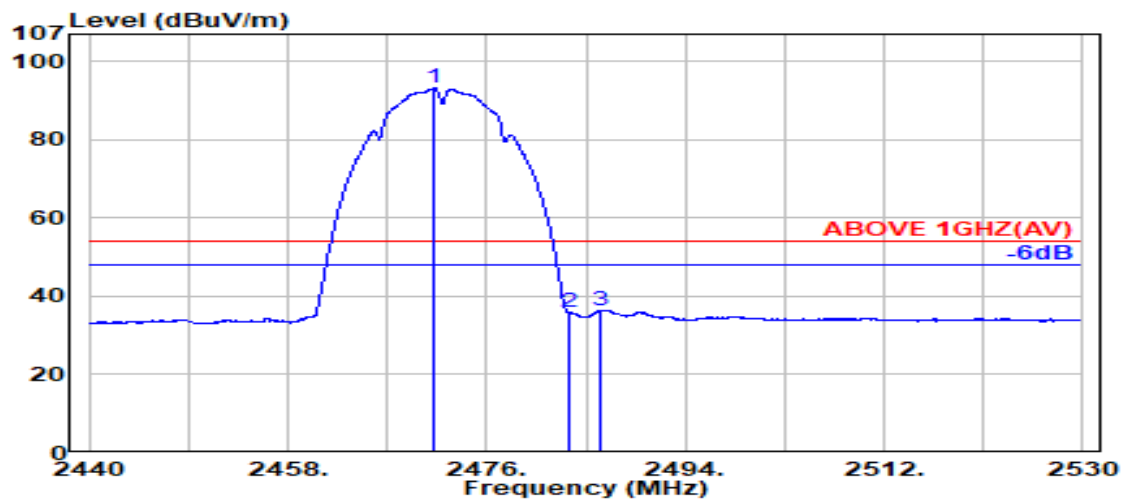


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.44	6.15	34.51	93.16	93.24	---	---	Average
2483.500	28.47	6.17	34.52	35.73	35.84	54.00	18.16	Average
2486.400	28.47	6.17	34.52	36.41	36.54	54.00	17.46	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

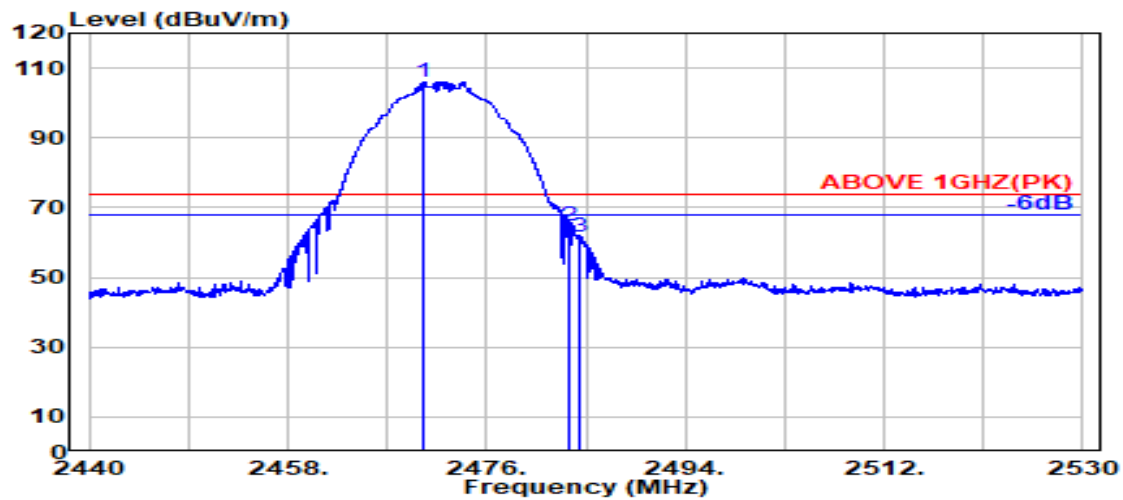

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.250	28.44	6.15	34.51	106.03	106.10	---	---	Peak
2483.500	28.47	6.17	34.52	64.65	64.77	74.00	9.23	Peak
2484.500	28.47	6.17	34.52	61.48	61.60	74.00	12.40	Peak

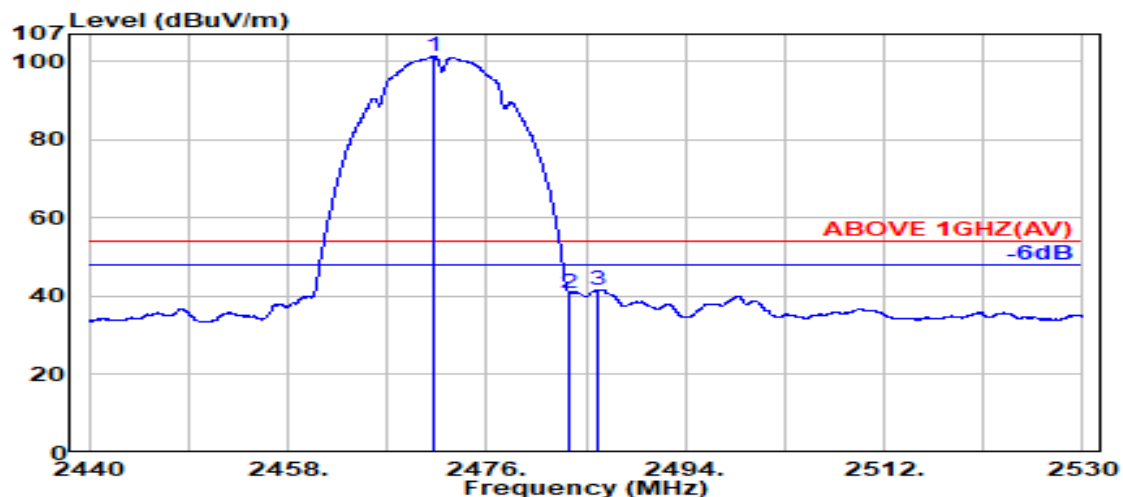

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.200	28.44	6.15	34.51	101.36	101.44	---	---	Average
2483.500	28.47	6.17	34.52	40.60	40.71	54.00	13.29	Average
2486.100	28.47	6.17	34.52	41.62	41.75	54.00	12.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

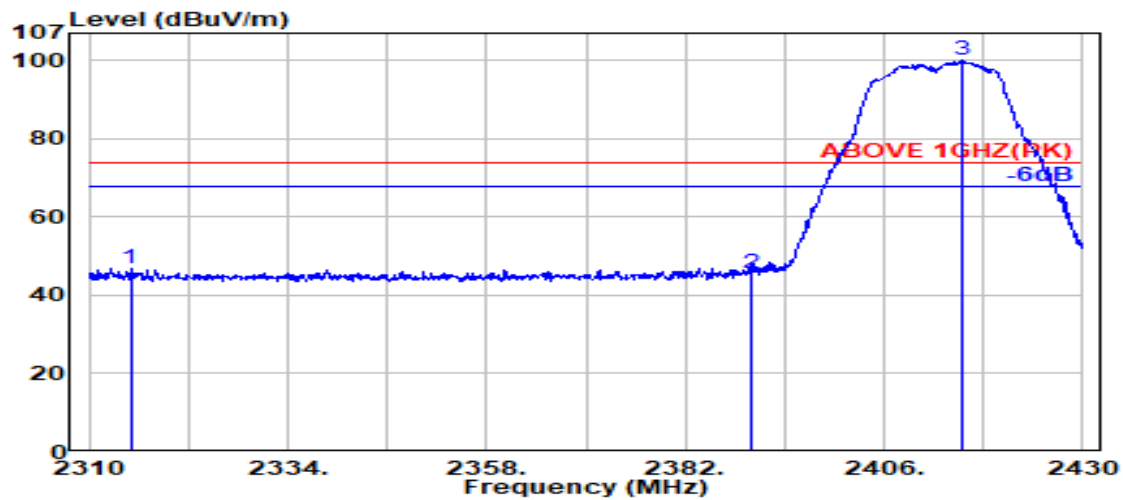

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2315.000	28.22	5.92	34.48	47.17	46.83	74.00	27.17	Peak
2390.000	28.18	6.03	34.50	45.82	45.54	74.00	28.46	Peak
@ 2415.400	28.19	6.07	34.50	100.29	100.05	---	---	Peak

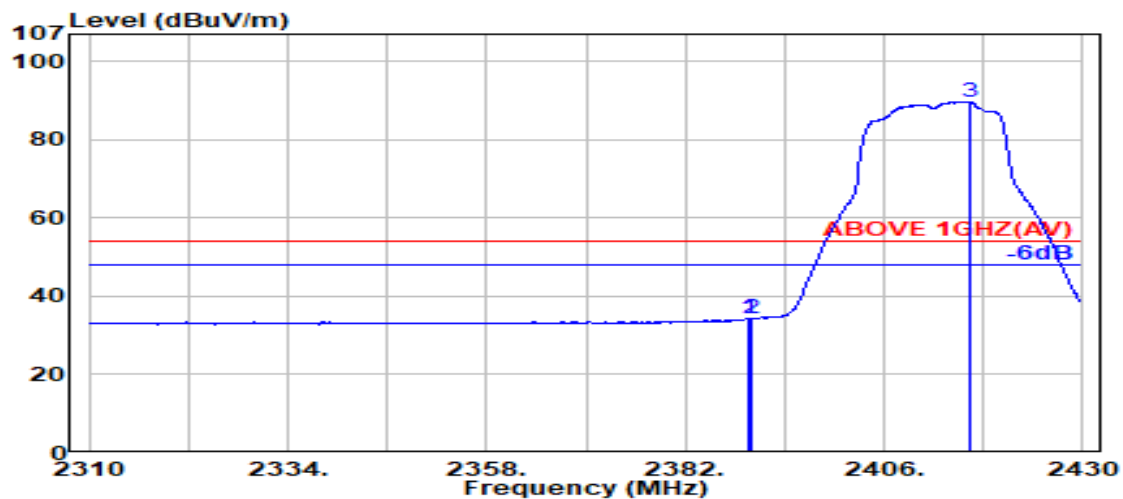

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	34.55	34.27	54.00	19.73	Average
2390.000	28.18	6.03	34.50	34.48	34.20	54.00	19.80	Average
@ 2416.300	28.20	6.07	34.50	90.01	89.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

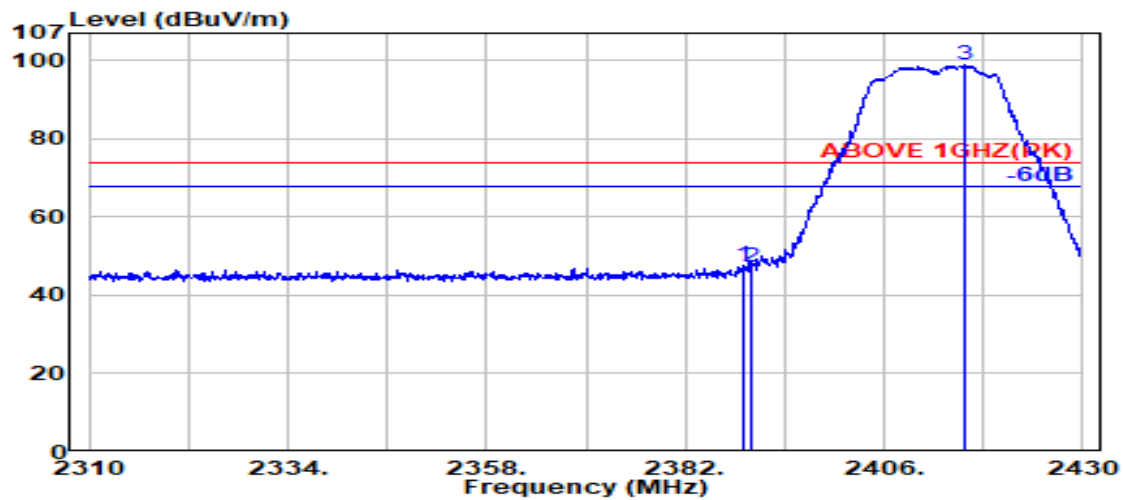

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.50	47.72	47.45	74.00	26.55	Peak
2390.000	28.18	6.03	34.50	47.61	47.33	74.00	26.67	Peak
@ 2415.700	28.19	6.07	34.50	99.20	98.96	---	---	Peak

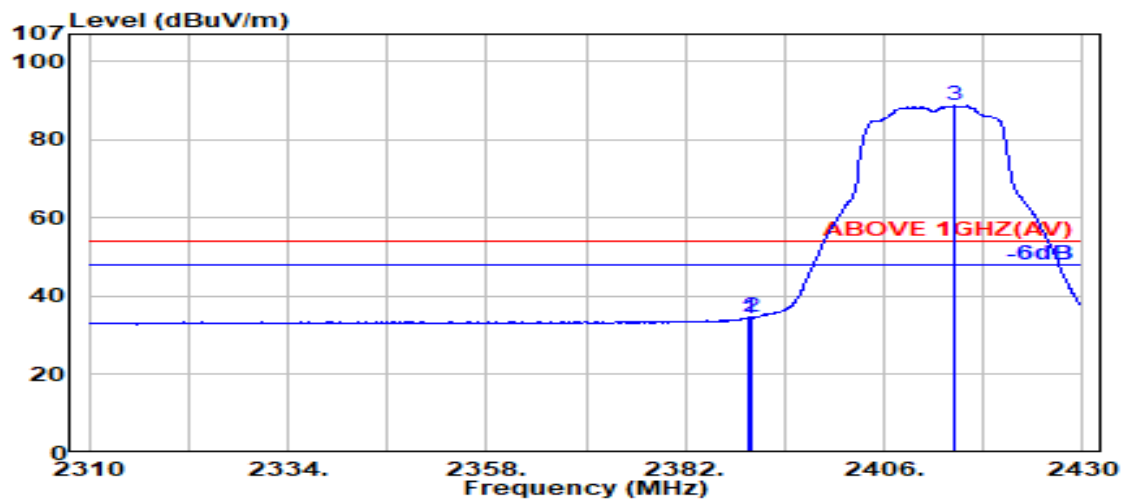


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	34.72	34.44	54.00	19.56	Average
2390.000	28.18	6.03	34.50	34.86	34.58	54.00	19.42	Average
@ 2414.400	28.19	6.07	34.50	88.99	88.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

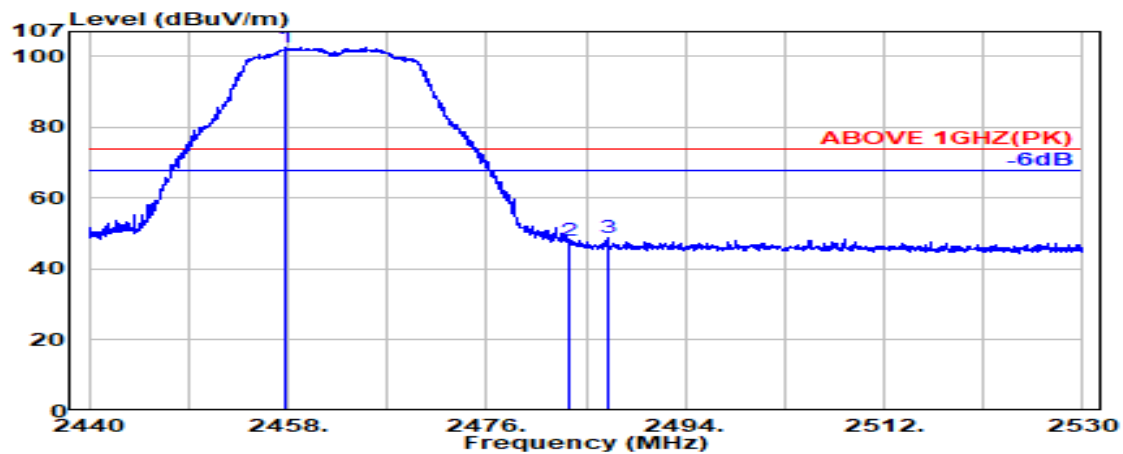

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2457.750	28.42	6.13	34.51	102.37	102.41	---	---	Peak
2483.500	28.47	6.17	34.52	48.07	48.19	74.00	25.81	Peak
2486.900	28.47	6.17	34.52	48.70	48.83	74.00	25.17	Peak

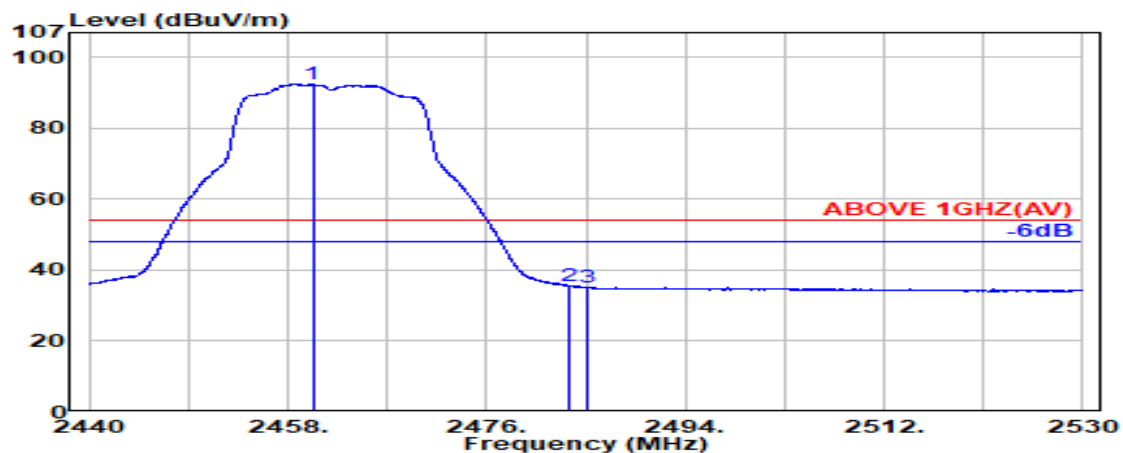


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.250	28.42	6.13	34.51	92.35	92.39	---	---	Average
2483.500	28.47	6.17	34.52	35.23	35.35	54.00	18.65	Average
2485.100	28.47	6.17	34.52	35.14	35.27	54.00	18.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

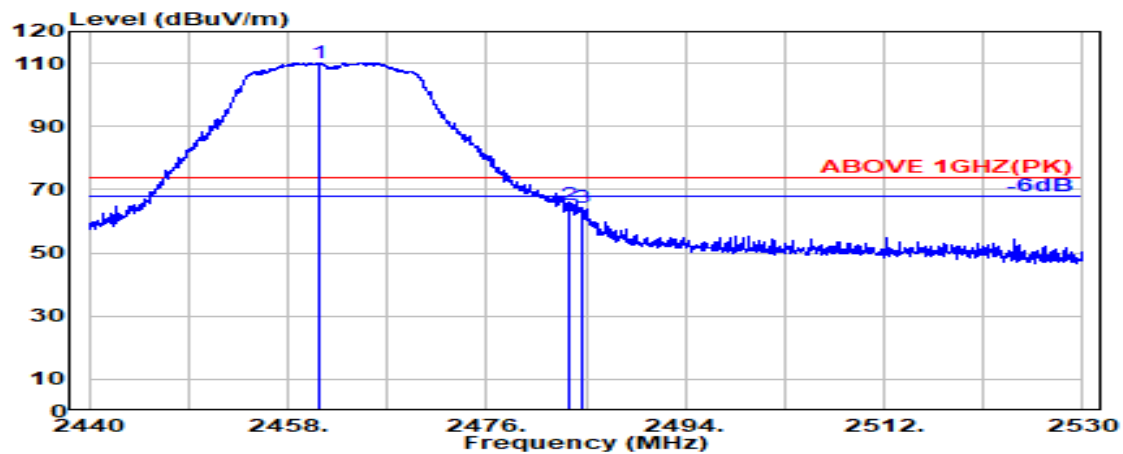

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.800	28.42	6.14	34.51	110.20	110.24	---	---	Peak
2483.500	28.47	6.17	34.52	65.18	65.29	74.00	8.71	Peak
2484.550	28.47	6.17	34.52	64.32	64.44	74.00	9.56	Peak

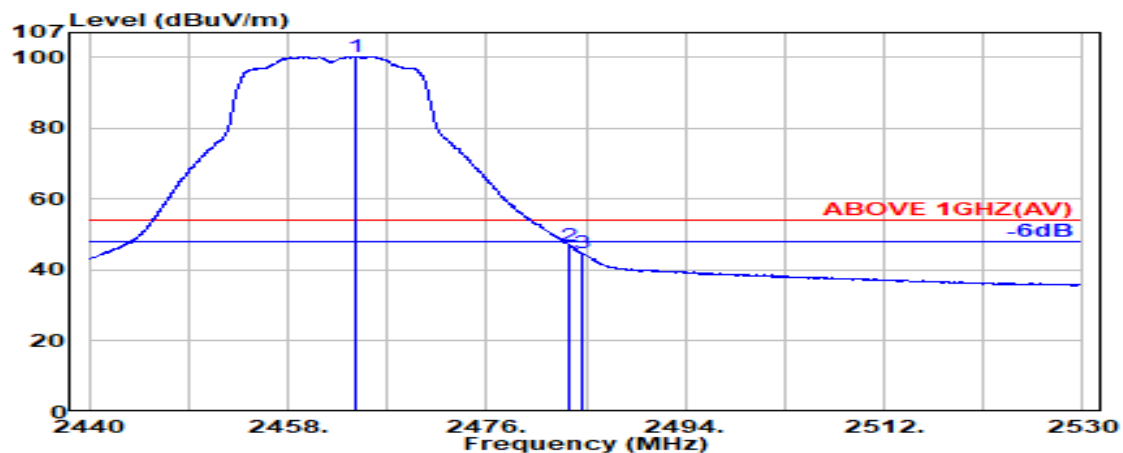

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.200	28.43	6.14	34.51	100.11	100.16	---	---	Average
2483.500	28.47	6.17	34.52	46.92	47.04	54.00	6.96	Average
2484.550	28.47	6.17	34.52	44.80	44.92	54.00	9.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

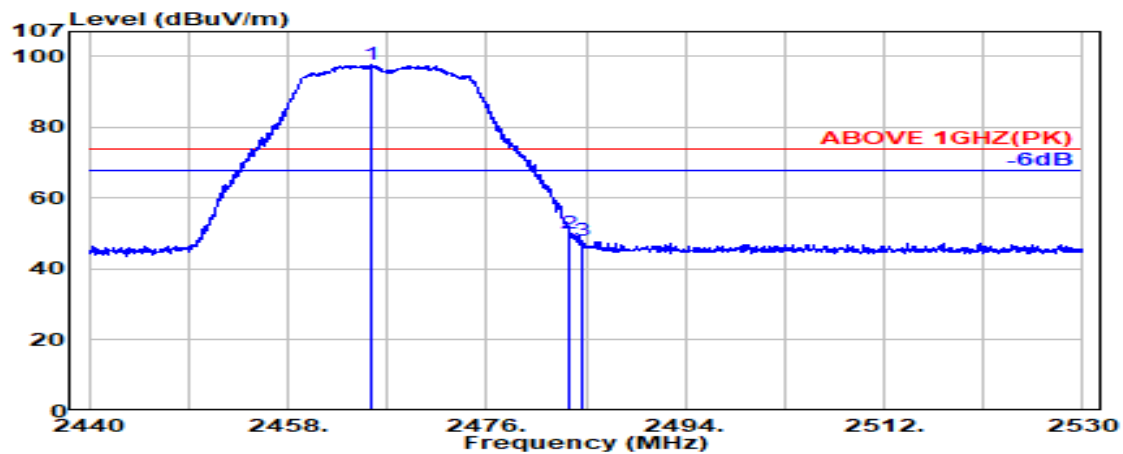

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.600	28.43	6.14	34.51	97.47	97.53	---	---	Peak
2483.500	28.47	6.17	34.52	49.98	50.09	74.00	23.91	Peak
2484.550	28.47	6.17	34.52	47.92	48.04	74.00	25.96	Peak

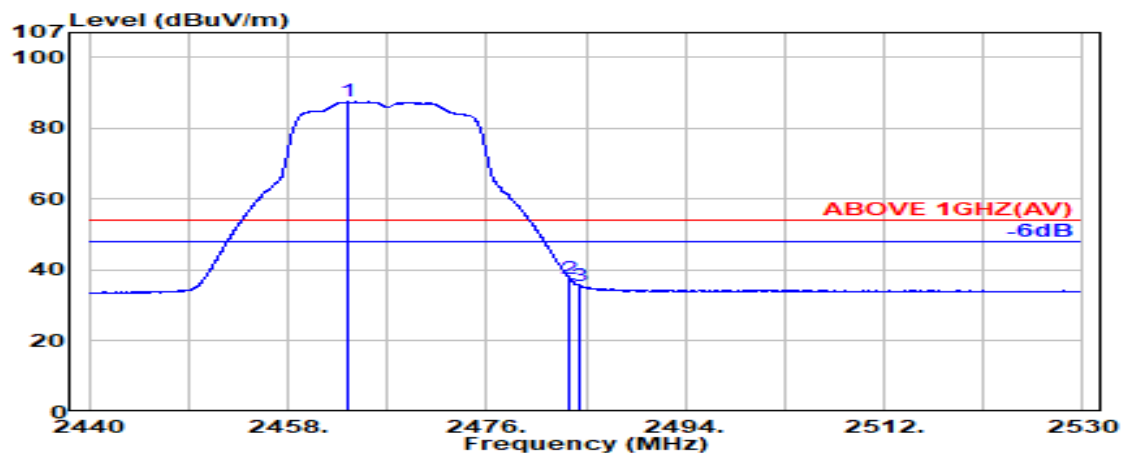

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.350	28.43	6.14	34.51	87.49	87.54	---	---	Average
2483.500	28.47	6.17	34.52	37.59	37.71	54.00	16.29	Average
2484.500	28.47	6.17	34.52	35.38	35.50	54.00	18.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

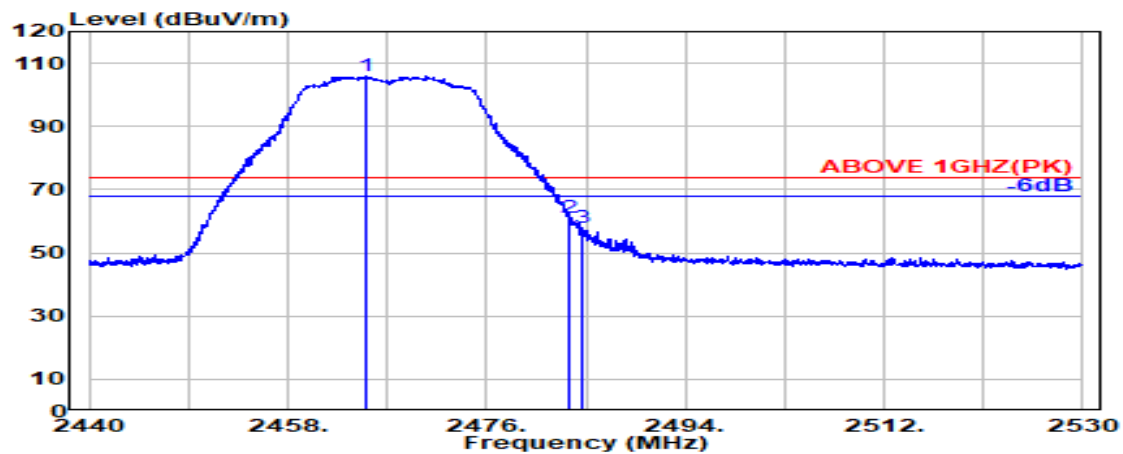

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.43	6.14	34.51	105.98	106.04	---	---	Peak
2483.500	28.47	6.17	34.52	61.10	61.22	74.00	12.78	Peak
2484.600	28.47	6.17	34.52	57.97	58.10	74.00	15.90	Peak

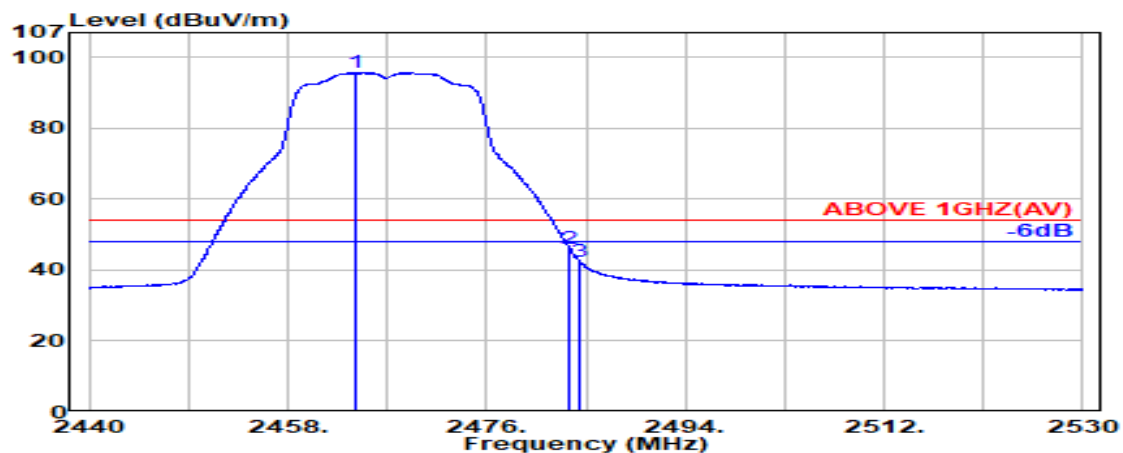

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.43	6.14	34.51	95.63	95.69	---	---	Average
2483.500	28.47	6.17	34.52	45.96	46.08	54.00	7.92	Average
2484.500	28.47	6.17	34.52	42.16	42.28	54.00	11.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

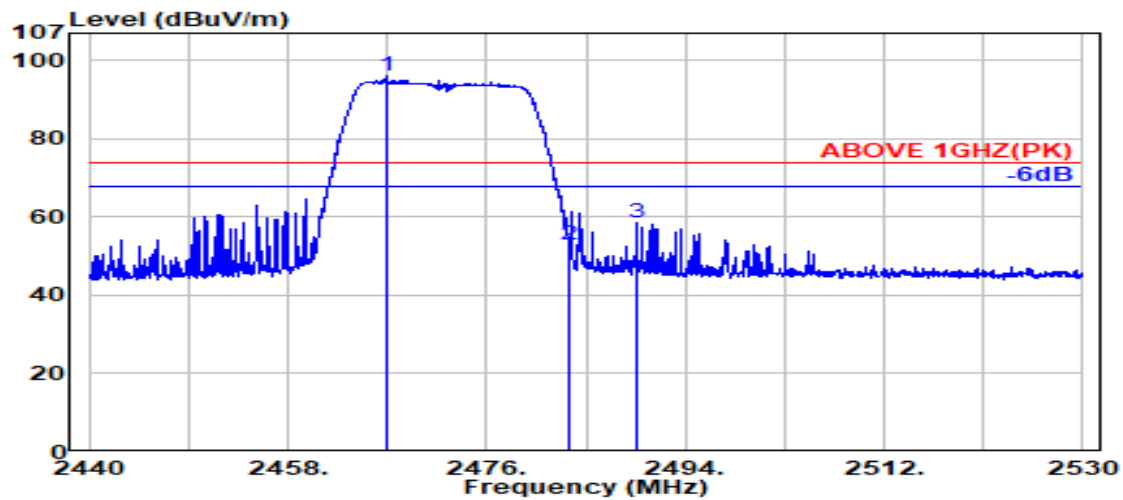

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.900	28.43	6.14	34.51	95.94	96.00	---	---	Peak
2483.500	28.47	6.17	34.52	52.97	53.08	74.00	20.92	Peak
2489.550	28.48	6.18	34.52	58.44	58.58	74.00	15.42	Peak

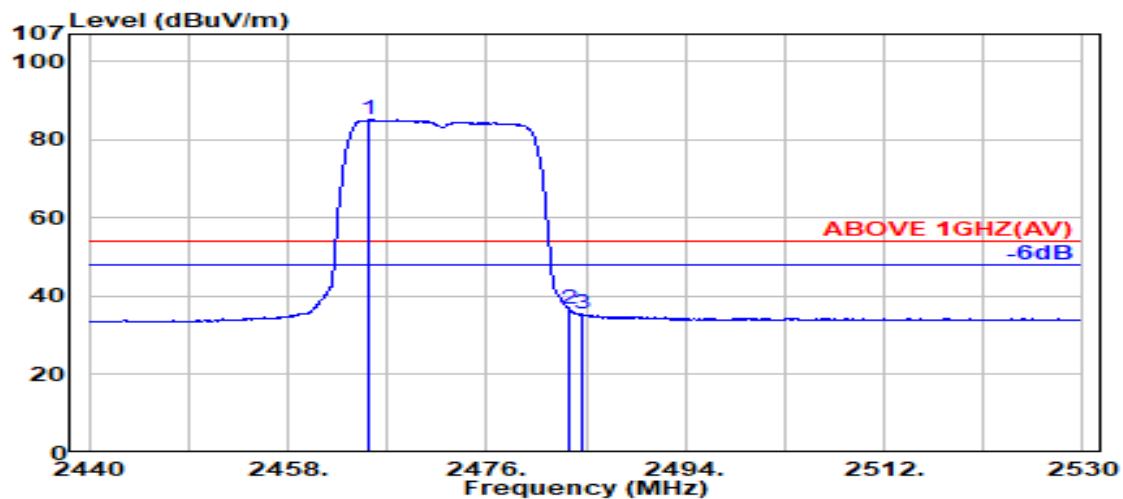

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	34.51	85.05	85.11	---	---	Average
2483.500	28.47	6.17	34.52	36.59	36.71	54.00	17.29	Average
2484.550	28.47	6.17	34.52	35.21	35.33	54.00	18.67	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

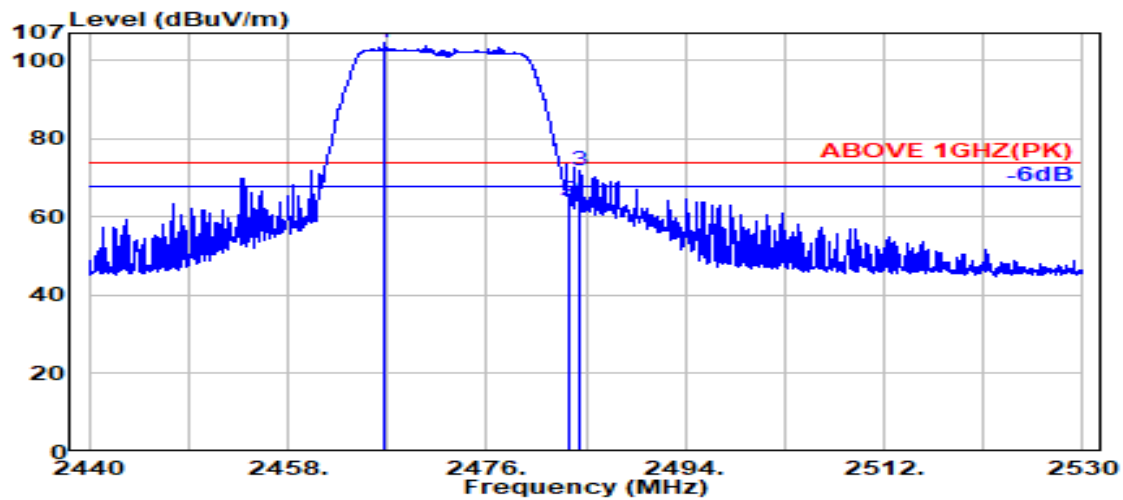

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.750	28.43	6.14	34.51	104.33	104.39	---	---	Peak
2483.500	28.47	6.17	34.52	64.01	64.13	74.00	9.87	Peak
2484.500	28.47	6.17	34.52	71.81	71.93	74.00	2.07	Peak

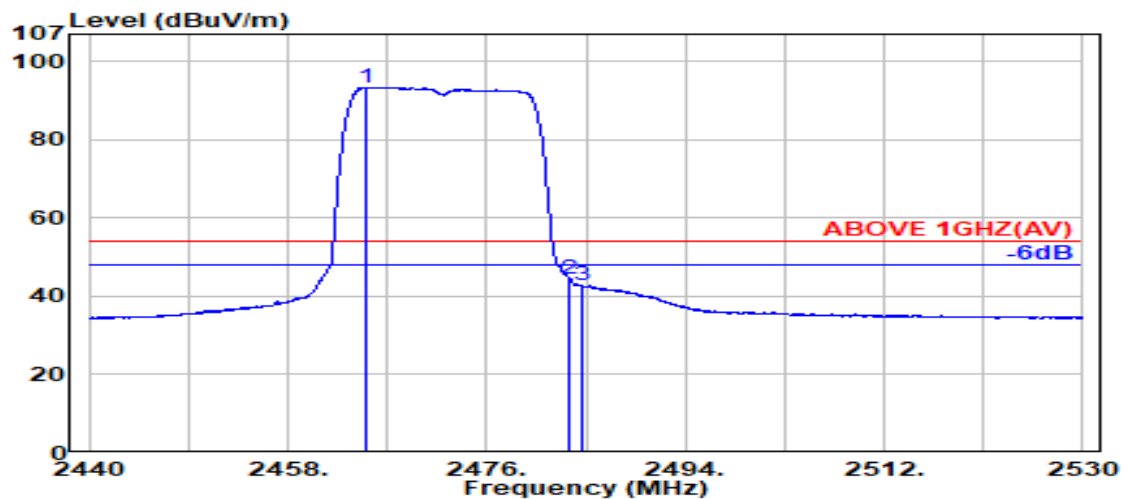

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.050	28.43	6.14	34.51	93.30	93.36	---	---	Average
2483.500	28.47	6.17	34.52	44.47	44.58	54.00	9.42	Average
2484.550	28.47	6.17	34.52	42.77	42.89	54.00	11.11	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

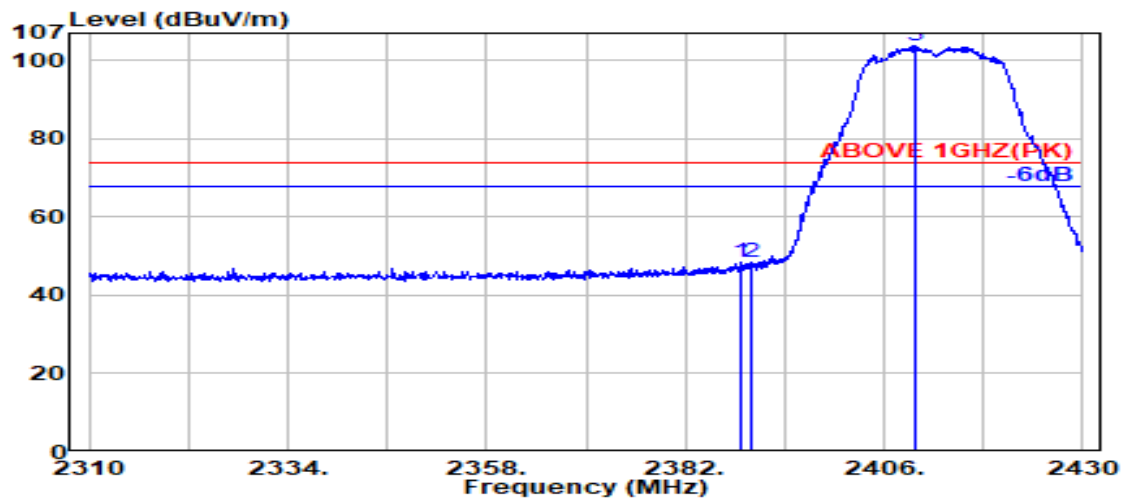

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.19	6.03	34.50	48.90	48.62	74.00	25.38	Peak
2390.000	28.18	6.03	34.50	48.68	48.40	74.00	25.60	Peak
@ 2409.900	28.16	6.06	34.50	104.22	103.94	---	---	Peak

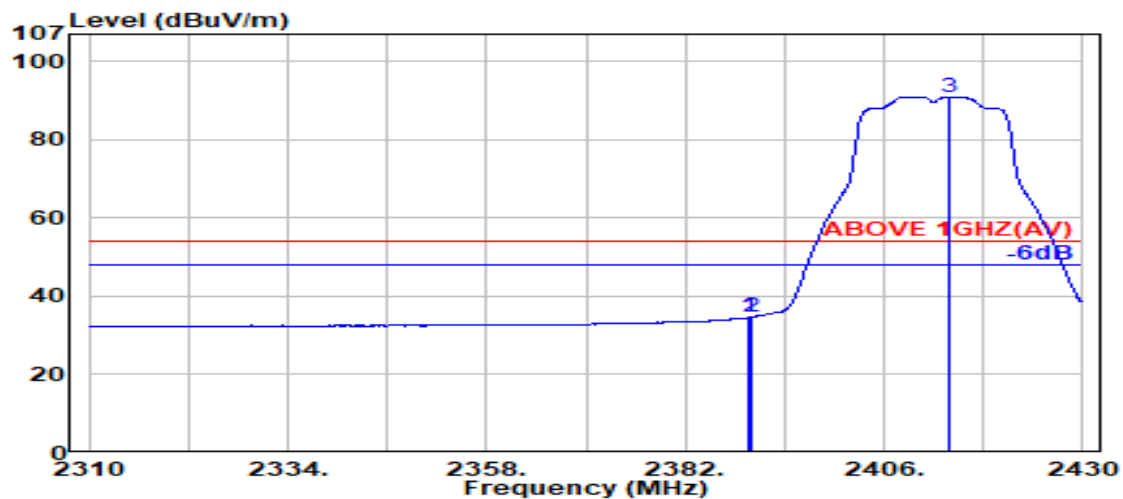

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	34.84	34.56	54.00	19.44	Average
2390.000	28.18	6.03	34.50	34.95	34.67	54.00	19.33	Average
@ 2414.000	28.18	6.07	34.50	91.15	90.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

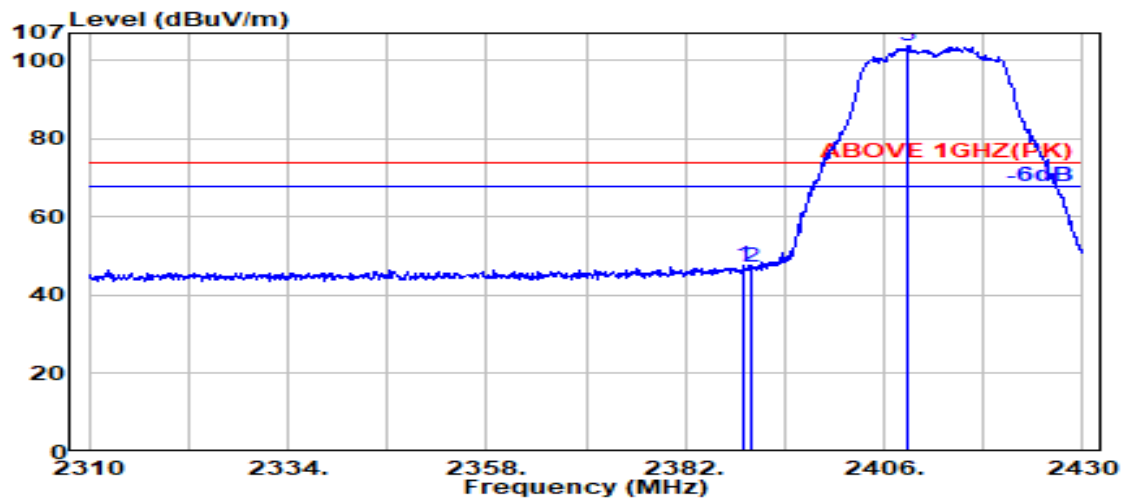

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.50	47.77	47.49	74.00	26.51	Peak
2390.000	28.18	6.03	34.50	47.40	47.12	74.00	26.88	Peak
@ 2408.800	28.15	6.06	34.50	104.15	103.87	---	---	Peak

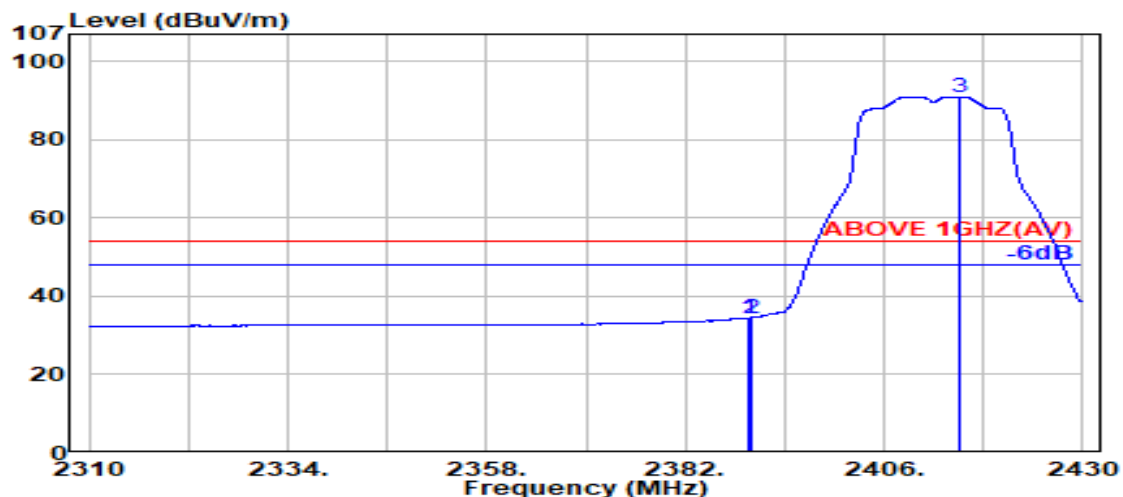


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	34.76	34.48	54.00	19.52	Average
2390.000	28.18	6.03	34.50	34.79	34.51	54.00	19.49	Average
@ 2415.100	28.19	6.07	34.50	91.17	90.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

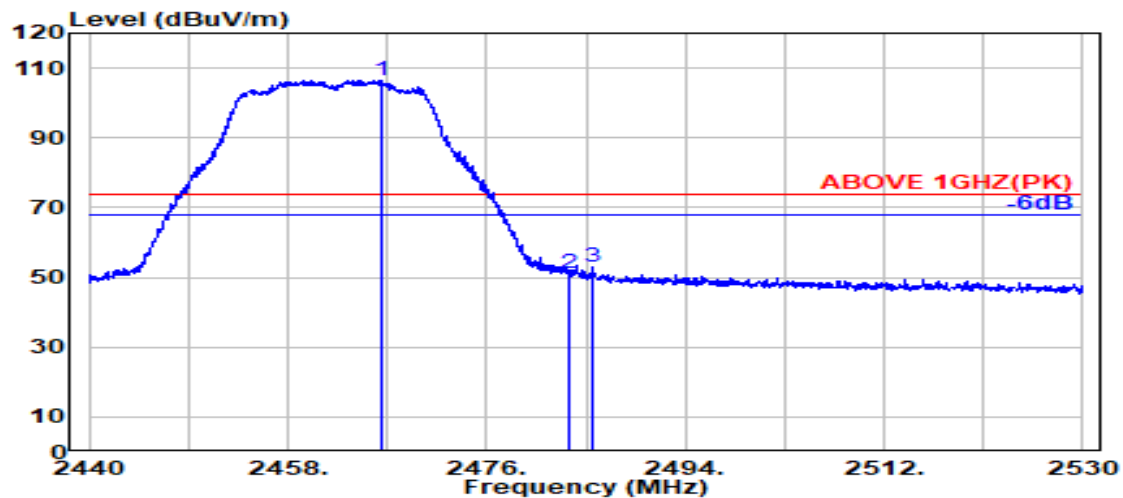

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.43	6.14	34.51	106.44	106.50	---	---	Peak
2483.500	28.47	6.17	34.52	50.94	51.05	74.00	22.95	Peak
2485.650	28.47	6.17	34.52	52.67	52.79	74.00	21.21	Peak

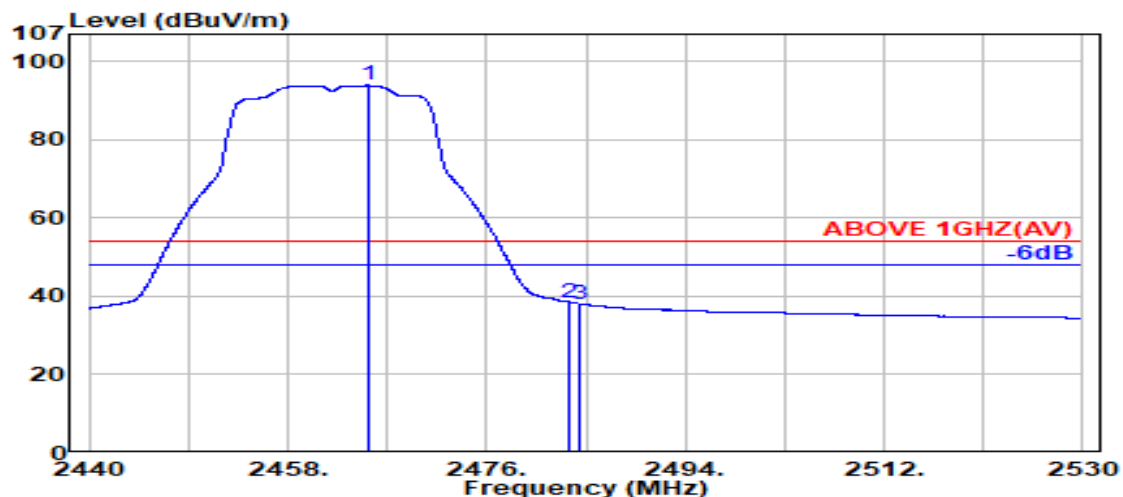

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.350	28.43	6.14	34.51	93.86	93.92	---	---	Average
2483.500	28.47	6.17	34.52	38.36	38.48	54.00	15.52	Average
2484.500	28.47	6.17	34.52	37.93	38.05	54.00	15.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

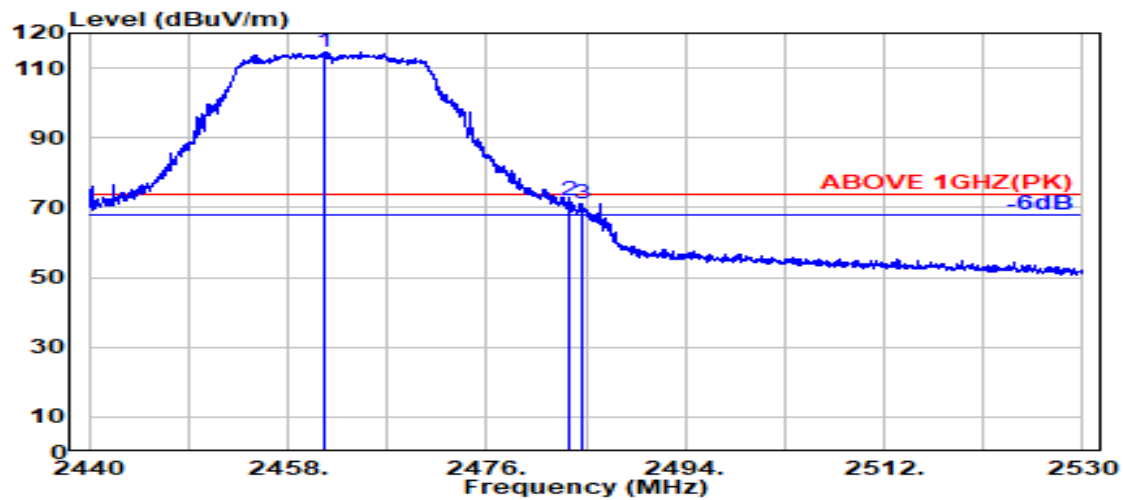

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.400	28.42	6.14	34.51	114.48	114.53	---	---	Peak
2483.500	28.47	6.17	34.52	72.03	72.14	74.00	1.86	Peak
2484.650	28.47	6.17	34.52	71.19	71.31	74.00	2.69	Peak

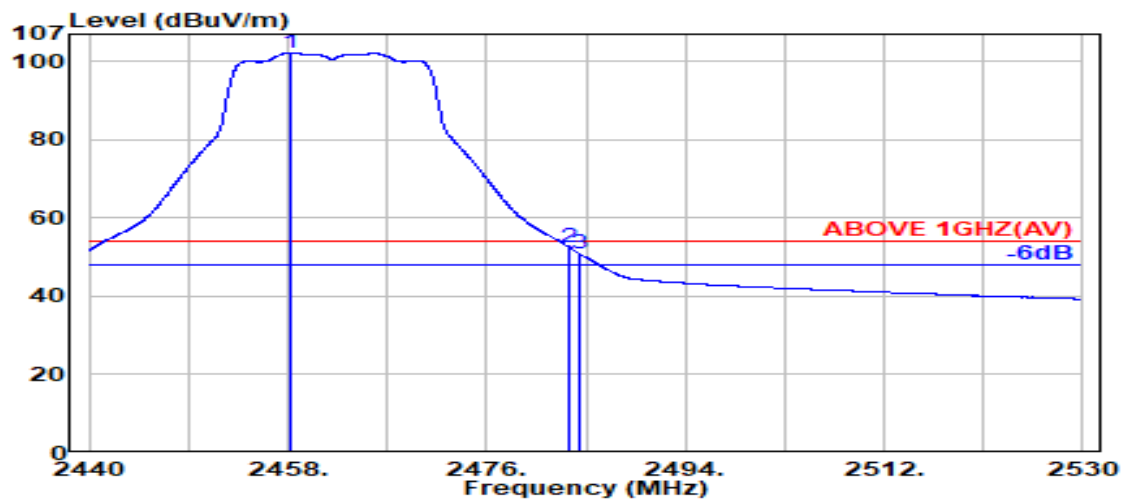


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.250	28.42	6.13	34.51	102.13	102.17	---	---	Average
2483.500	28.47	6.17	34.52	52.35	52.47	54.00	1.53	Average
2484.500	28.47	6.17	34.52	50.63	50.75	54.00	3.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

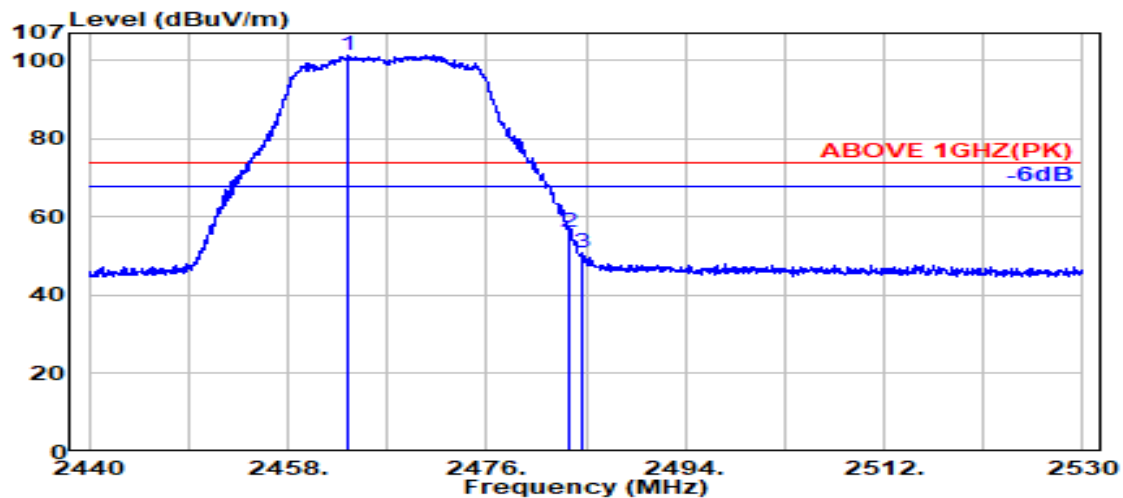

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.450	28.43	6.14	34.51	101.42	101.47	---	---	Peak
2483.500	28.47	6.17	34.52	55.99	56.11	74.00	17.89	Peak
2484.550	28.47	6.17	34.52	50.60	50.72	74.00	23.28	Peak

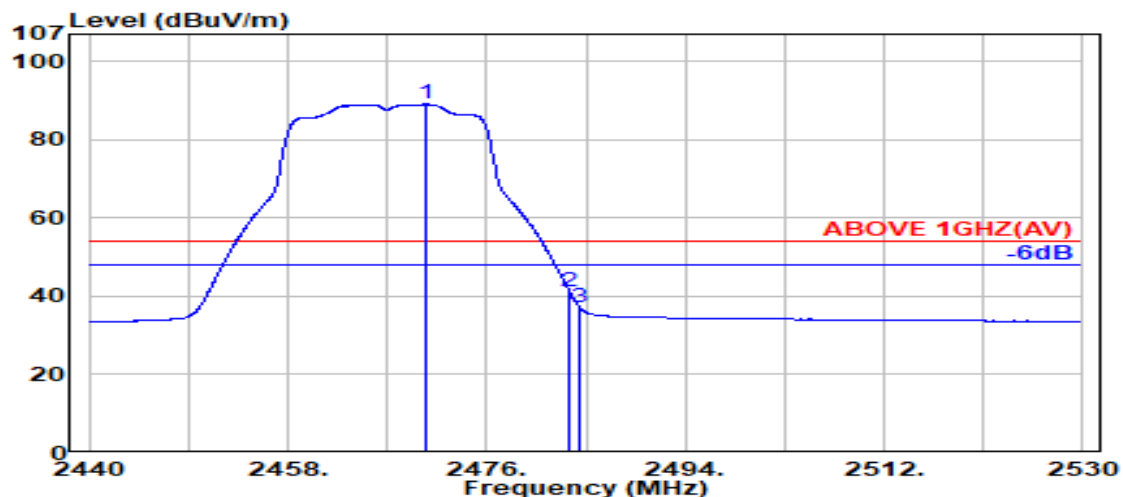

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.550	28.44	6.15	34.51	88.99	89.07	---	---	Average
2483.500	28.47	6.17	34.52	41.08	41.19	54.00	12.81	Average
2484.500	28.47	6.17	34.52	36.93	37.05	54.00	16.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

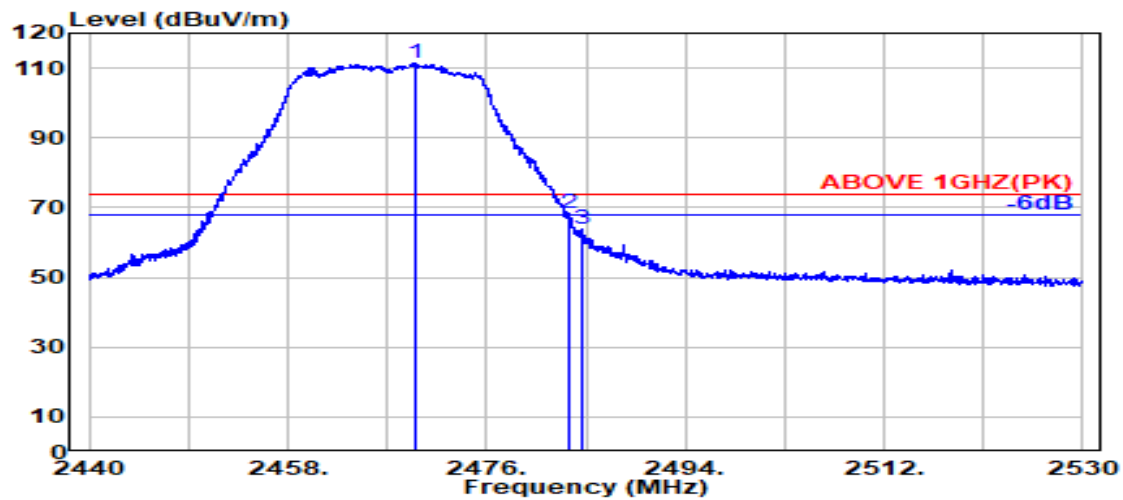

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.500	28.44	6.15	34.51	111.23	111.31	---	---	Peak
2483.500	28.47	6.17	34.52	68.20	68.31	74.00	5.69	Peak
2484.600	28.47	6.17	34.52	63.95	64.07	74.00	9.93	Peak

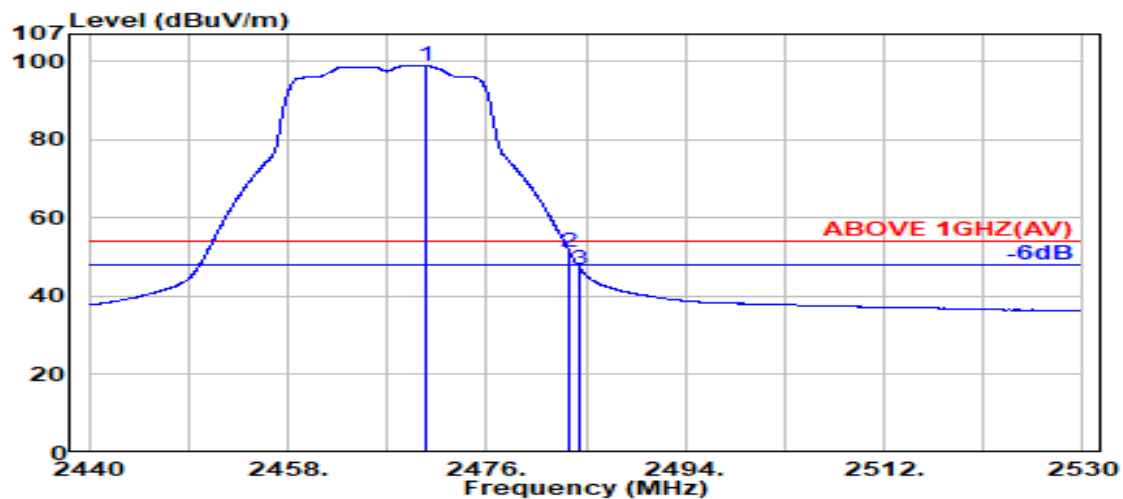

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.550	28.44	6.15	34.51	98.76	98.84	---	---	Average
2483.500	28.47	6.17	34.52	51.26	51.38	54.00	2.62	Average
2484.500	28.47	6.17	34.52	46.78	46.90	54.00	7.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

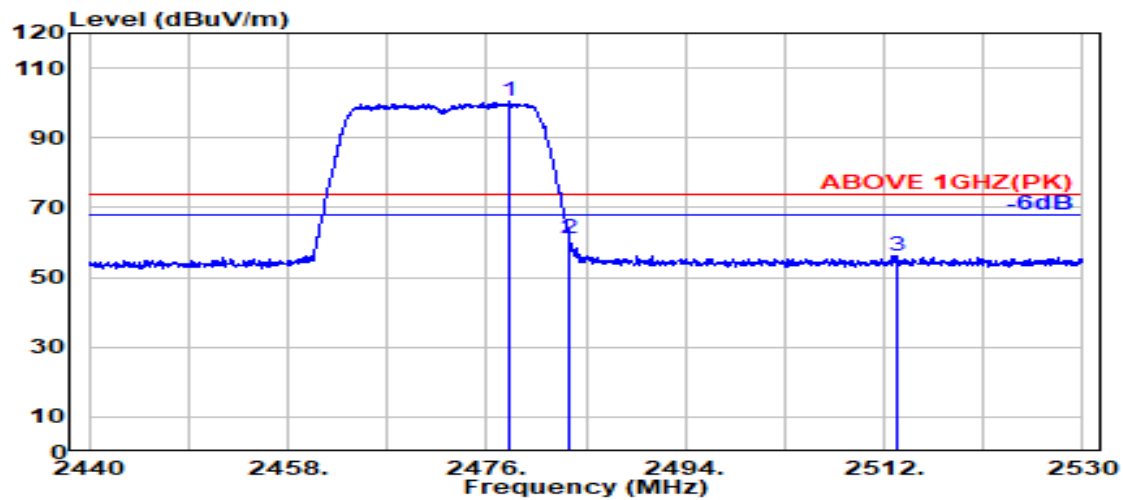

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.950	28.46	6.16	34.52	100.20	100.30	---	---	Peak
2483.500	28.47	6.17	34.52	61.10	61.22	74.00	12.78	Peak
2513.200	28.58	6.21	34.52	55.89	56.15	74.00	17.85	Peak

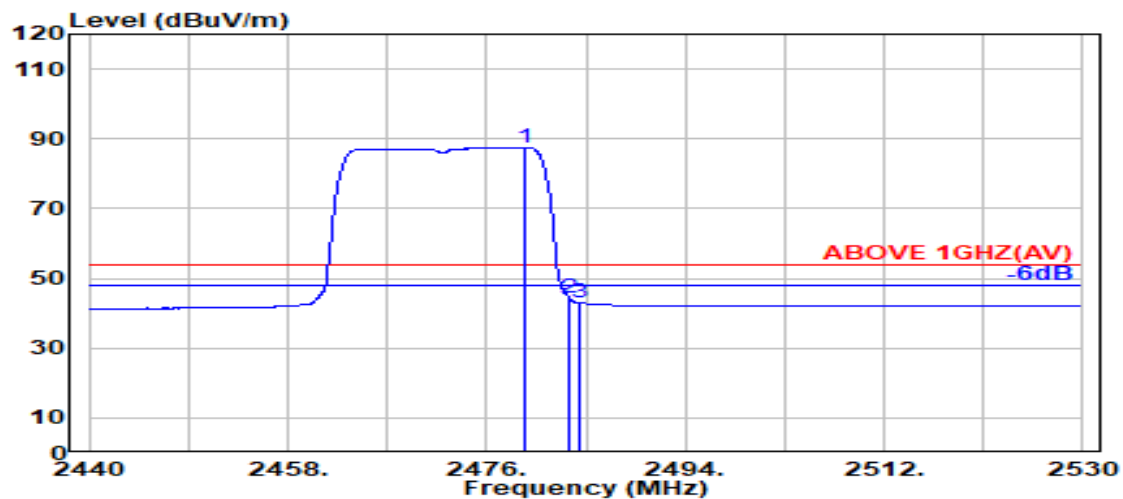

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.450	28.46	6.16	34.52	87.51	87.62	---	---	Average
2483.500	28.47	6.17	34.52	44.34	44.46	54.00	9.54	Average
2484.500	28.47	6.17	34.52	42.80	42.93	54.00	11.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

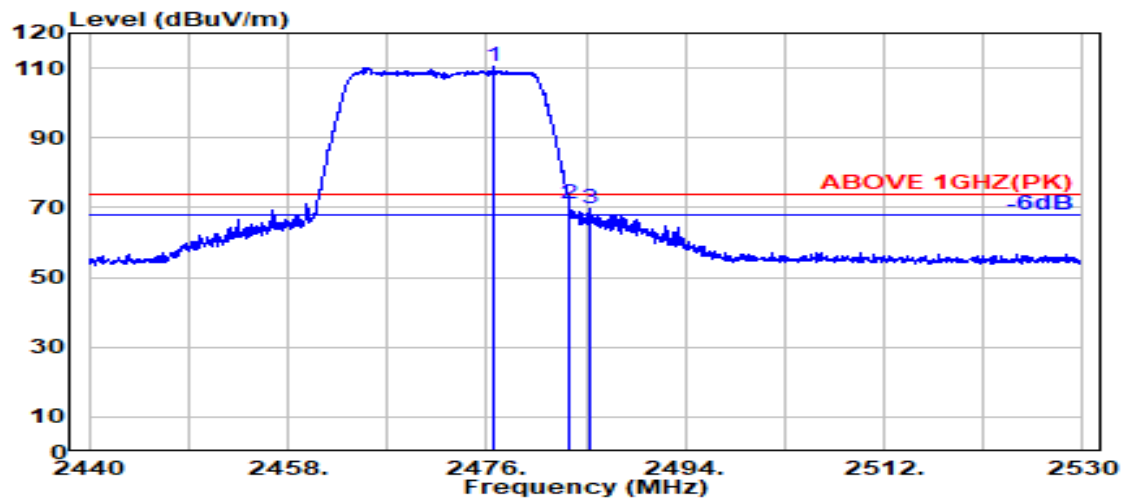

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	28.45	6.16	34.52	110.17	110.27	---	---	Peak
2483.500	28.47	6.17	34.52	71.01	71.13	74.00	2.87	Peak
2485.300	28.47	6.17	34.52	69.61	69.74	74.00	4.26	Peak

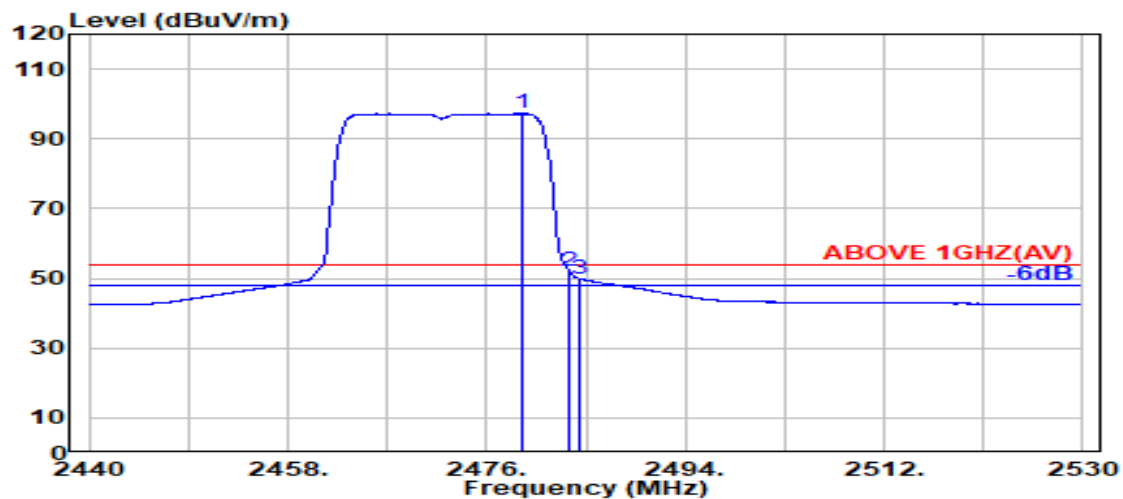

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.250	28.46	6.16	34.52	97.05	97.15	---	---	Average
2483.500	28.47	6.17	34.52	51.99	52.11	54.00	1.89	Average
2484.500	28.47	6.17	34.52	49.70	49.82	54.00	4.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

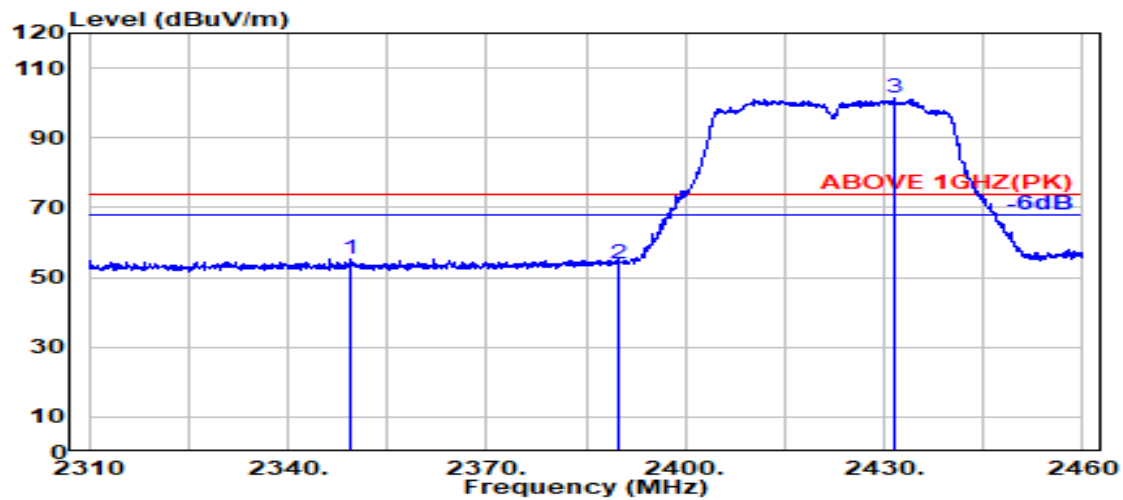

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2349.583	28.50	5.98	34.49	55.26	55.24	74.00	18.76	Peak
2390.000	28.18	6.03	34.50	54.29	54.01	74.00	19.99	Peak
@ 2431.667	28.29	6.09	34.51	101.36	101.24	---	---	Peak

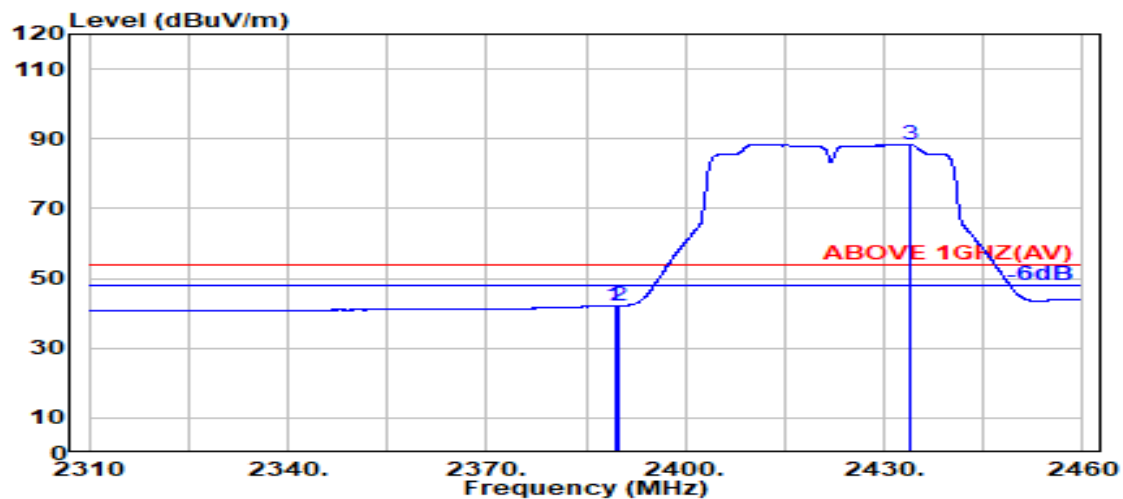

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.333	28.18	6.03	34.50	42.47	42.19	54.00	11.81	Average
2390.000	28.18	6.03	34.50	42.48	42.19	54.00	11.81	Average
@ 2433.833	28.30	6.10	34.51	88.40	88.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

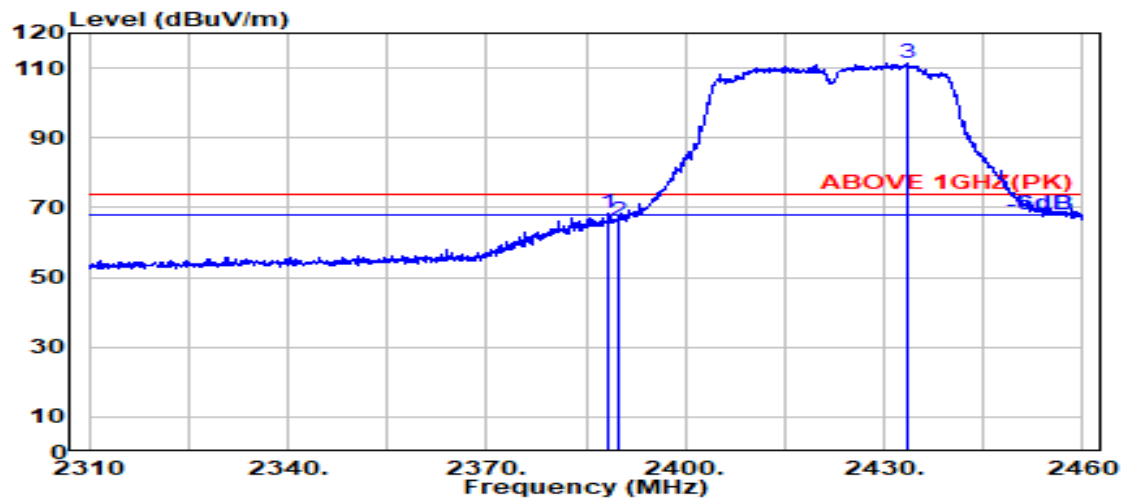

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.250	28.19	6.03	34.50	68.63	68.36	74.00	5.64	Peak
2390.000	28.18	6.03	34.50	66.43	66.15	74.00	7.85	Peak
@ 2433.583	28.30	6.10	34.51	111.42	111.31	---	---	Peak

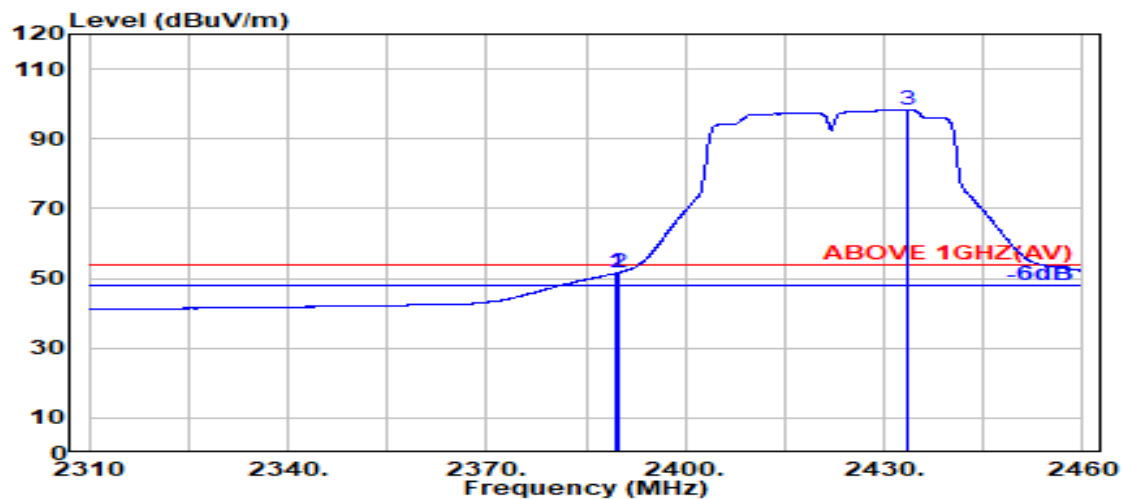


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	51.77	51.49	54.00	2.51	Peak
2390.000	28.18	6.03	34.50	51.94	51.66	54.00	2.34	Peak
@ 2433.500	28.30	6.10	34.51	98.58	98.47	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

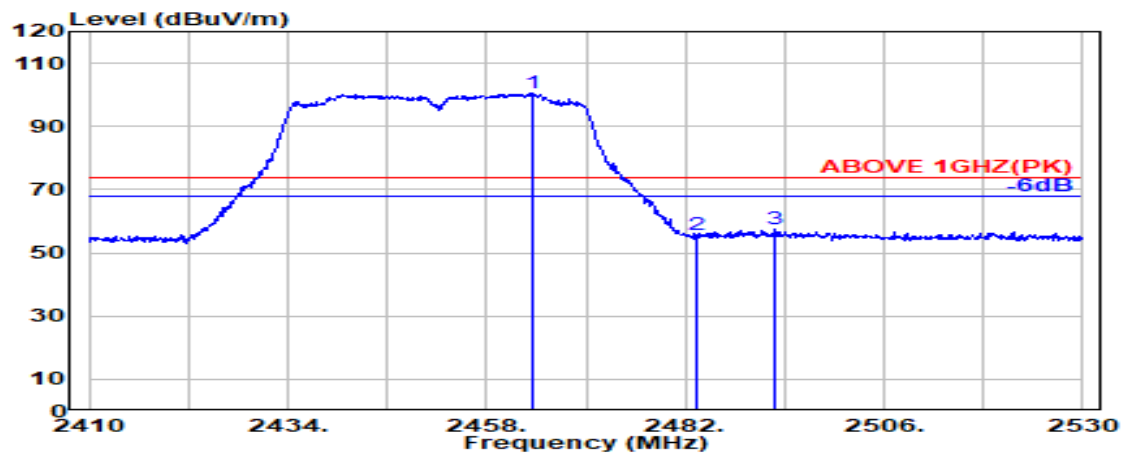

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.700	28.43	6.14	34.51	100.30	100.35	---	---	Peak
2483.500	28.47	6.17	34.52	55.78	55.90	74.00	18.10	Peak
2492.900	28.49	6.18	34.52	57.55	57.70	74.00	16.30	Peak

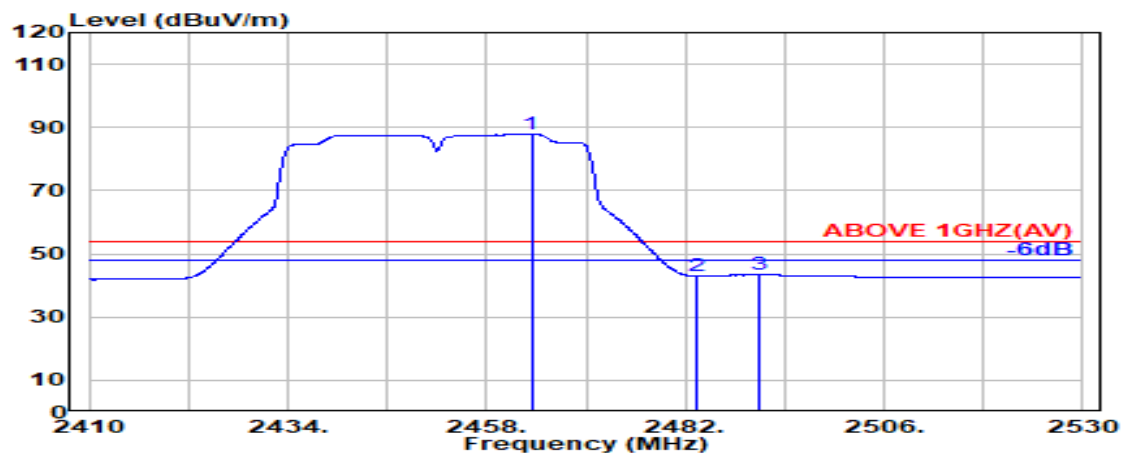

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.400	28.43	6.14	34.51	87.75	87.80	---	---	Average
2483.500	28.47	6.17	34.52	42.88	43.00	54.00	11.00	Average
2490.900	28.48	6.18	34.52	43.19	43.33	54.00	10.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

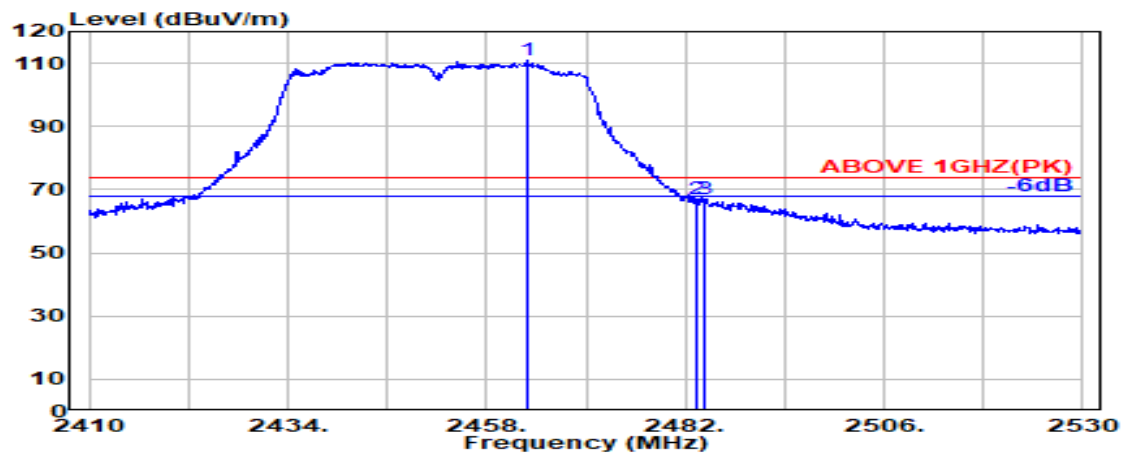

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.800	28.43	6.14	34.51	110.83	110.88	---	---	Peak
2483.500	28.47	6.17	34.52	66.84	66.96	74.00	7.04	Peak
2484.400	28.47	6.17	34.52	66.78	66.90	74.00	7.10	Peak

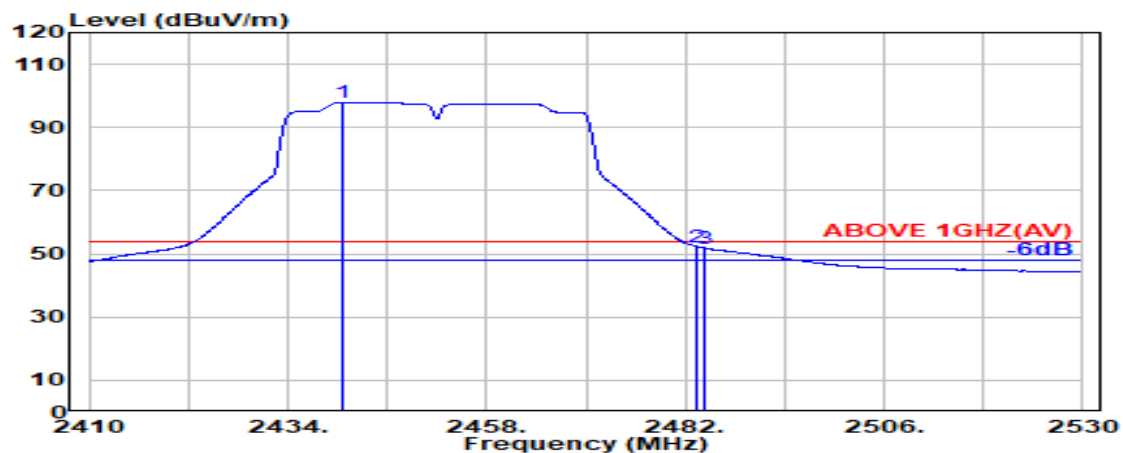

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.500	28.34	6.11	34.51	97.88	97.82	---	---	Average
2483.500	28.47	6.17	34.52	52.11	52.23	54.00	1.77	Average
2484.400	28.47	6.17	34.52	51.67	51.79	54.00	2.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

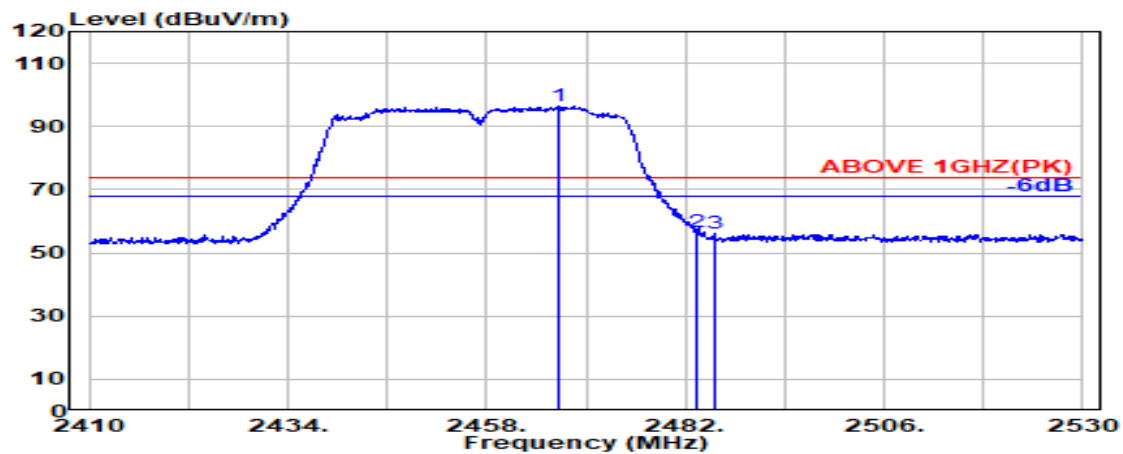

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.600	28.43	6.14	34.51	96.39	96.45	---	---	Peak
2483.500	28.47	6.17	34.52	56.54	56.65	74.00	17.35	Peak
2485.500	28.47	6.17	34.52	55.98	56.11	74.00	17.89	Peak

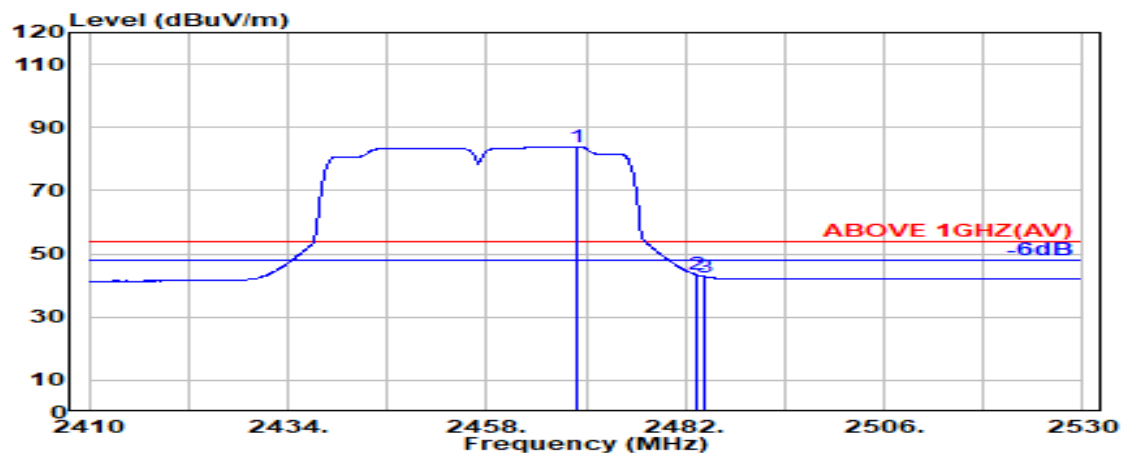


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.800	28.44	6.15	34.51	83.87	83.94	---	---	Average
2483.500	28.47	6.17	34.52	43.14	43.25	54.00	10.75	Average
2484.400	28.47	6.17	34.52	42.55	42.67	54.00	11.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

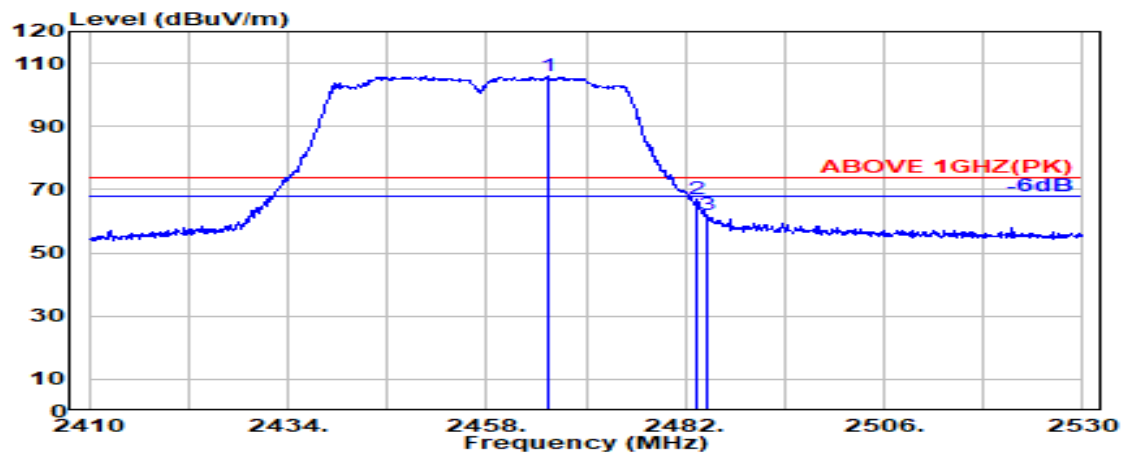

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.43	6.14	34.51	105.98	106.04	---	---	Peak
2483.500	28.47	6.17	34.52	66.94	67.06	74.00	6.94	Peak
2484.700	28.47	6.17	34.52	61.86	61.98	74.00	12.02	Peak

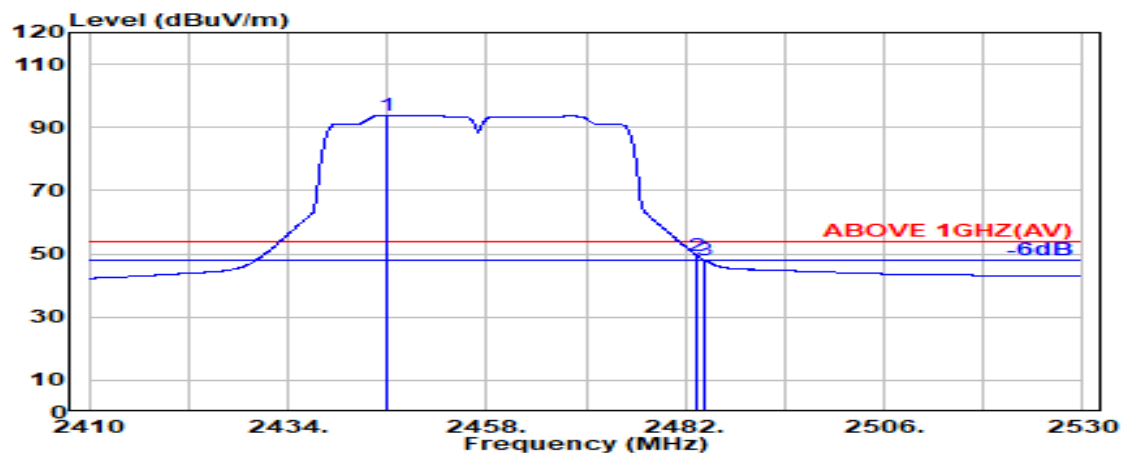

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.900	28.38	6.11	34.51	93.84	93.82	---	---	Average
2483.500	28.47	6.17	34.52	49.25	49.37	54.00	4.63	Average
2484.400	28.47	6.17	34.52	47.74	47.86	54.00	6.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

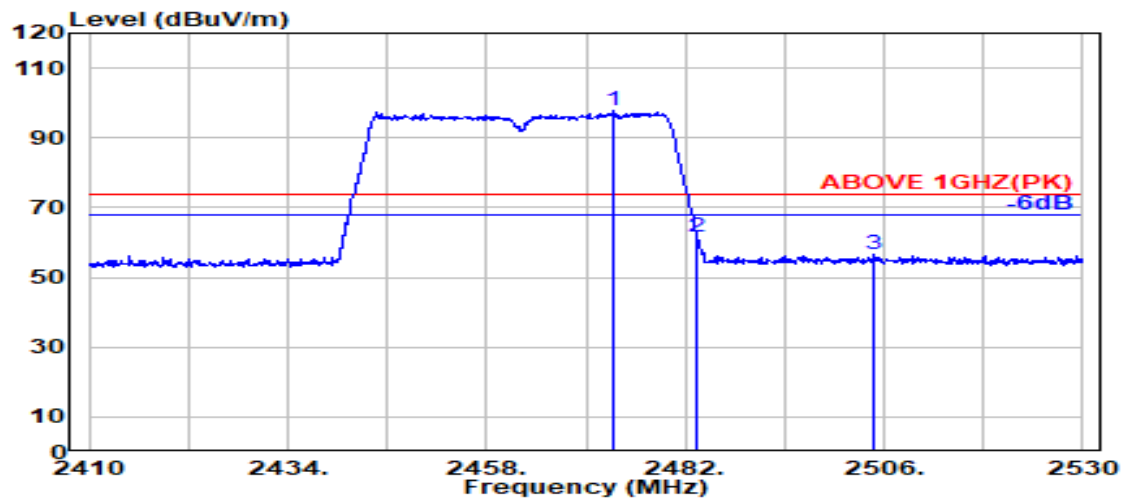

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.400	28.45	6.15	34.51	97.76	97.85	---	---	Peak
2483.500	28.47	6.17	34.52	61.59	61.71	74.00	12.29	Peak
2504.700	28.53	6.20	34.52	56.38	56.59	74.00	17.41	Peak

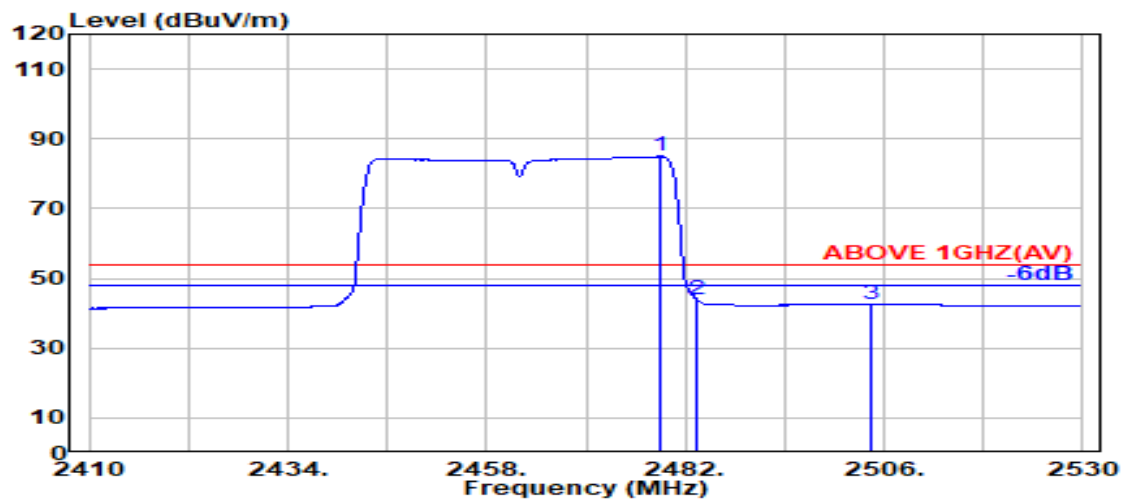

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.46	6.16	34.52	84.84	84.94	---	---	Average
2483.500	28.47	6.17	34.52	43.76	43.87	54.00	10.13	Average
2504.400	28.53	6.20	34.52	42.38	42.58	54.00	11.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

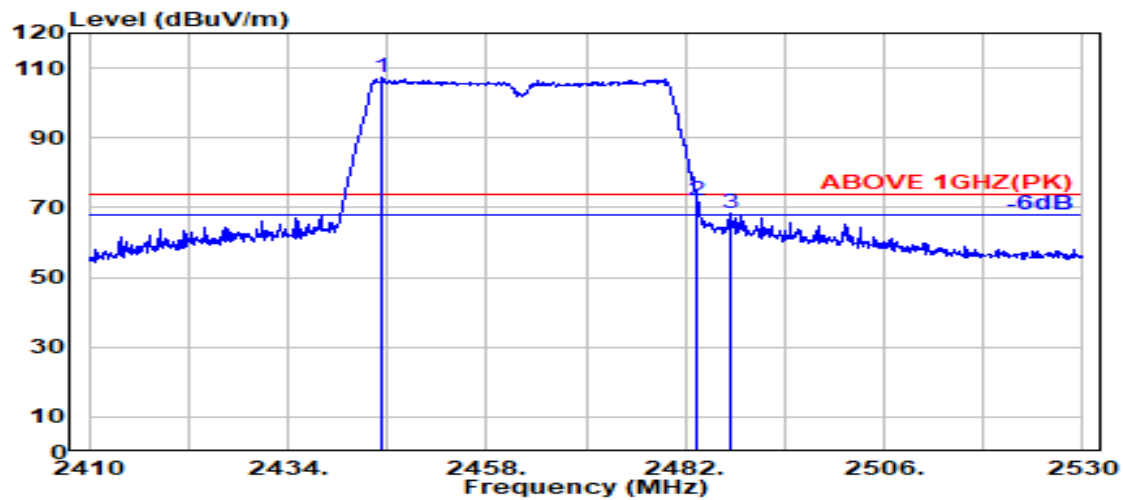

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.300	28.37	6.11	34.51	107.44	107.41	---	---	Peak
2483.500	28.47	6.17	34.52	71.84	71.96	74.00	2.04	Peak
2487.400	28.47	6.17	34.52	68.42	68.55	74.00	5.45	Peak

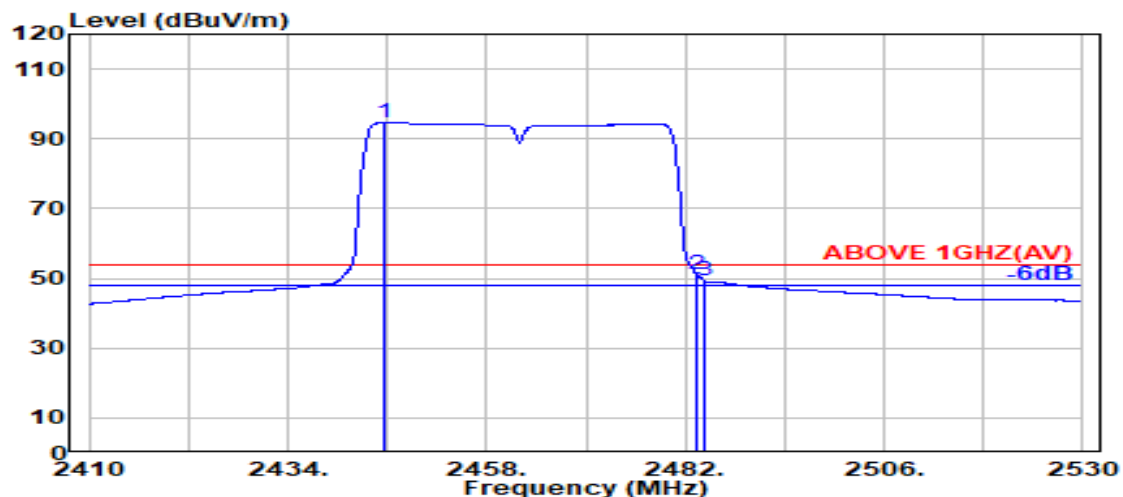

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.600	28.37	6.11	34.51	94.59	94.57	---	---	Average
2483.500	28.47	6.17	34.52	50.92	51.04	54.00	2.96	Average
2484.400	28.47	6.17	34.52	49.09	49.21	54.00	4.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

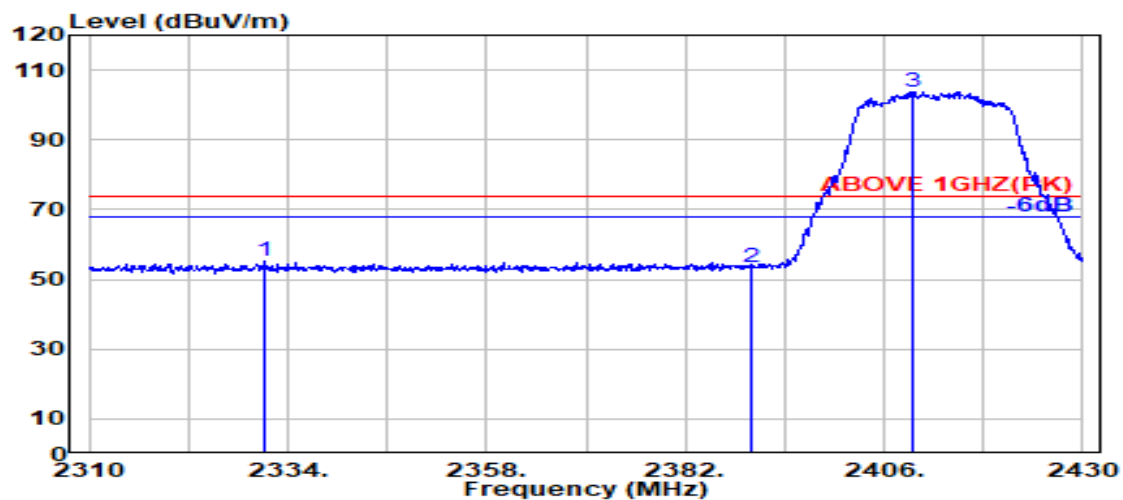

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2331.100	28.35	5.95	34.49	55.59	55.40	74.00	18.60	Peak
2390.000	28.18	6.03	34.50	53.88	53.60	74.00	20.40	Peak
@ 2409.400	28.16	6.06	34.50	104.19	103.91	---	---	Peak

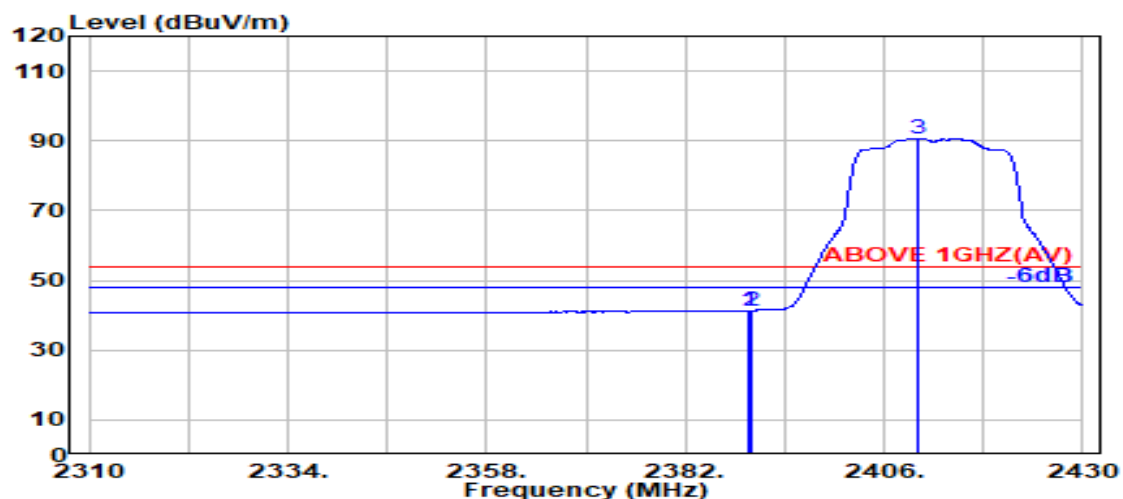

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.67	41.38	54.00	12.62	Average
2390.000	28.18	6.03	34.50	41.66	41.37	54.00	12.63	Average
@ 2410.200	28.16	6.06	34.50	90.84	90.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

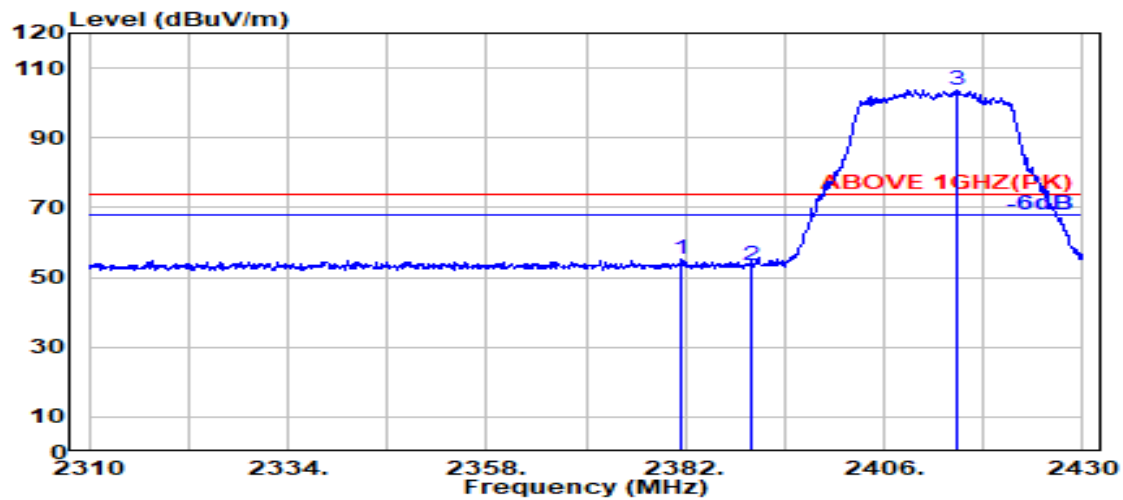

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.600	28.25	6.02	34.50	55.25	55.03	74.00	18.97	Peak
2390.000	28.18	6.03	34.50	53.66	53.38	74.00	20.62	Peak
@ 2414.900	28.19	6.07	34.50	104.10	103.86	---	---	Peak

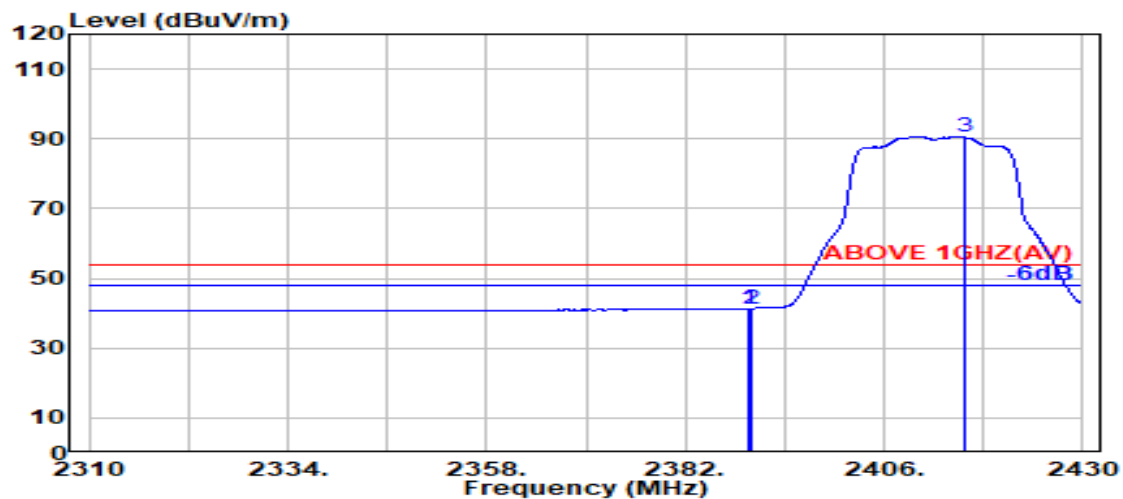

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.67	41.38	54.00	12.62	Average
2390.000	28.18	6.03	34.50	41.70	41.42	54.00	12.58	Average
@ 2415.600	28.19	6.07	34.50	90.70	90.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

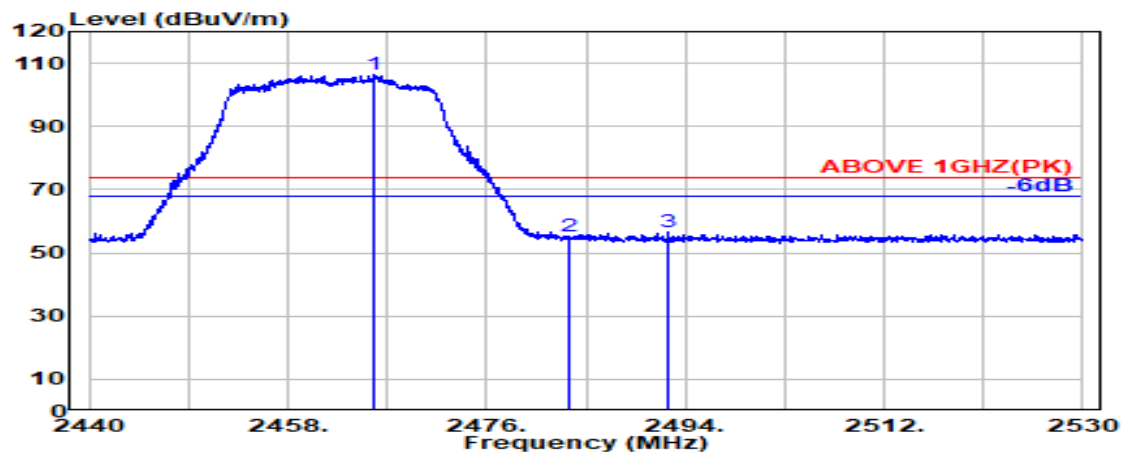

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.900	28.43	6.14	34.51	106.23	106.29	---	---	Peak
2483.500	28.47	6.17	34.52	55.15	55.26	74.00	18.74	Peak
2492.450	28.49	6.18	34.52	56.32	56.47	74.00	17.53	Peak

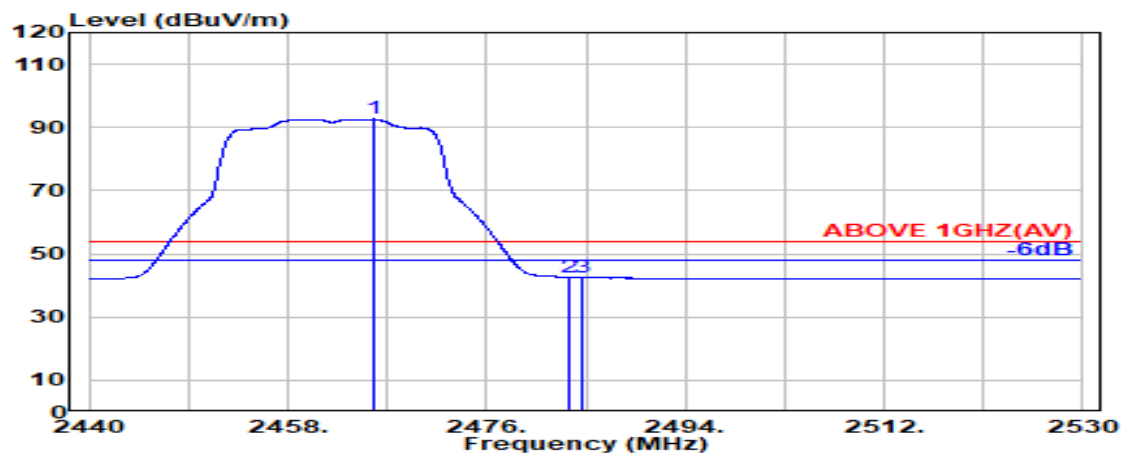

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.750	28.43	6.14	34.51	92.58	92.64	---	---	Average
2483.500	28.47	6.17	34.52	42.54	42.66	54.00	11.34	Average
2484.550	28.47	6.17	34.52	42.44	42.56	54.00	11.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

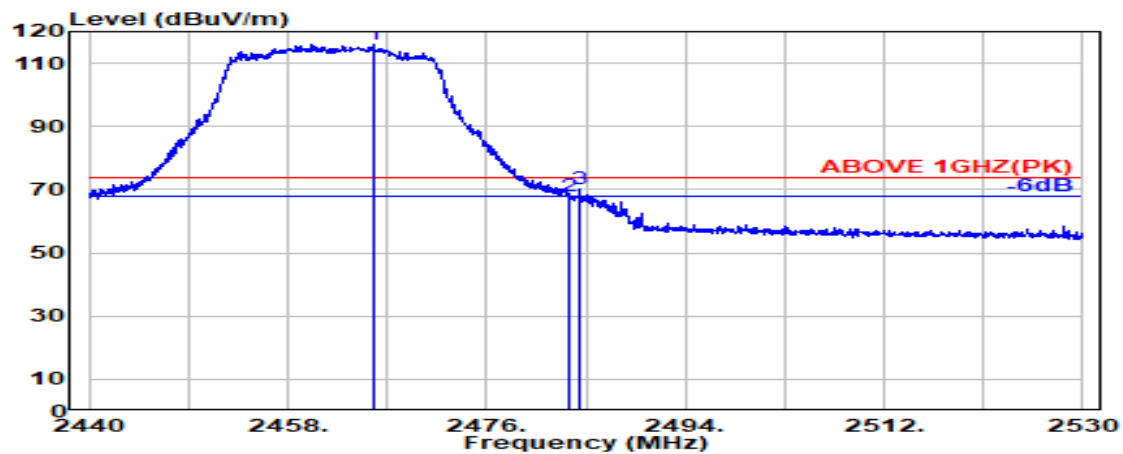

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.43	6.14	34.51	115.80	115.86	---	---	Peak
2483.500	28.47	6.17	34.52	67.82	67.93	74.00	6.07	Peak
2484.450	28.47	6.17	34.52	69.93	70.05	74.00	3.95	Peak

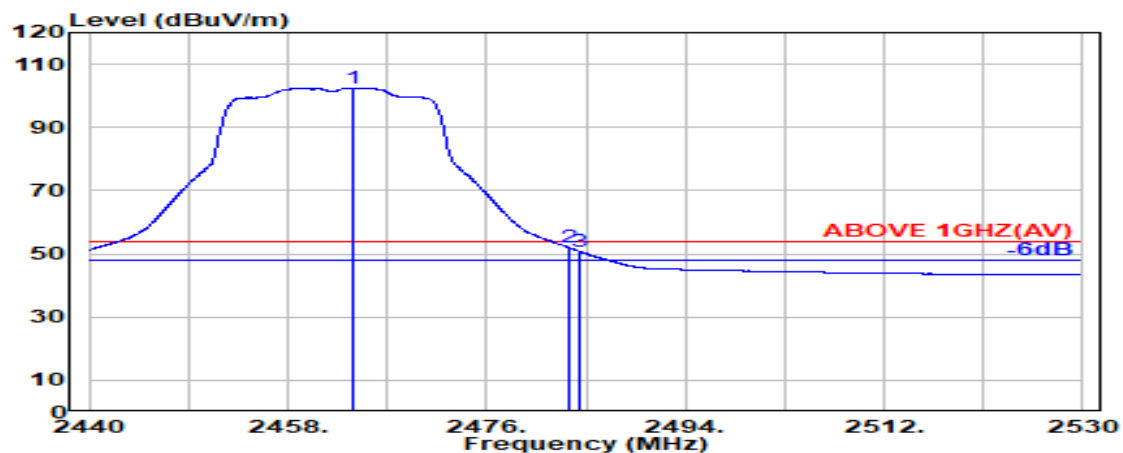

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.43	6.14	34.51	102.30	102.35	---	---	Average
2483.500	28.47	6.17	34.52	51.79	51.91	54.00	2.09	Average
2484.500	28.47	6.17	34.52	50.57	50.69	54.00	3.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

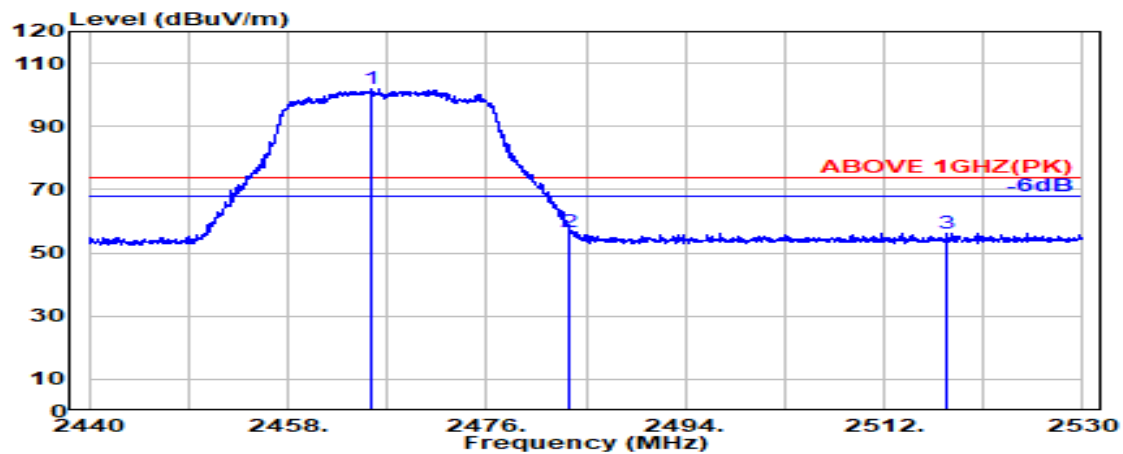

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.600	28.43	6.14	34.51	101.85	101.91	---	---	Peak
2483.500	28.47	6.17	34.52	56.52	56.64	74.00	17.36	Peak
2517.600	28.61	6.21	34.52	55.91	56.20	74.00	17.80	Peak

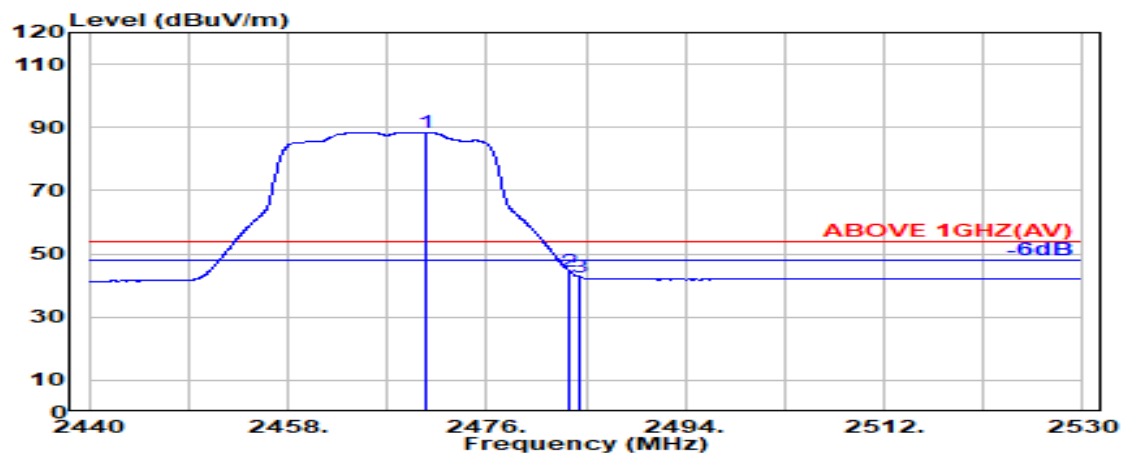

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.500	28.44	6.15	34.51	88.43	88.50	---	---	Average
2483.500	28.47	6.17	34.52	44.34	44.46	54.00	9.54	Average
2484.500	28.47	6.17	34.52	42.46	42.59	54.00	11.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

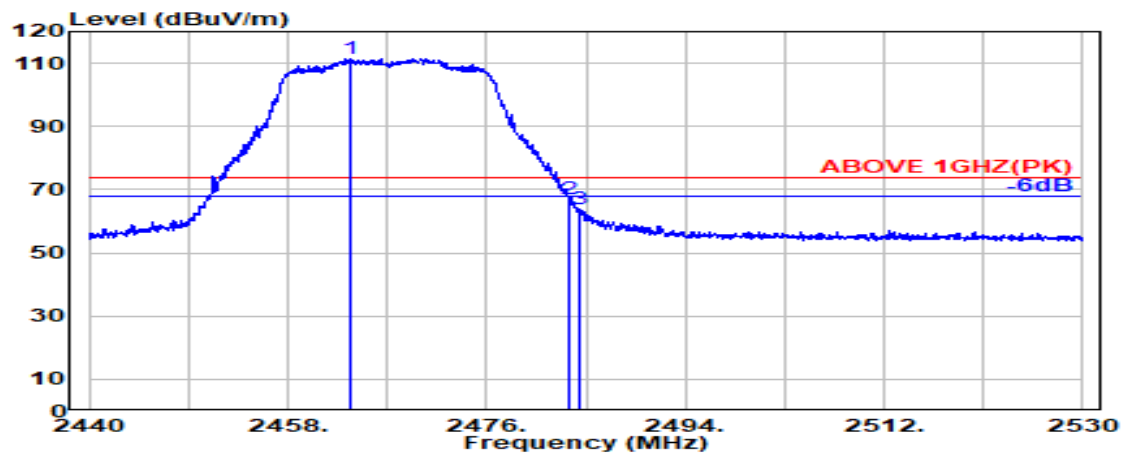

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.750	28.43	6.14	34.51	111.53	111.59	---	---	Peak
2483.500	28.47	6.17	34.52	66.82	66.94	74.00	7.06	Peak
2484.500	28.47	6.17	34.52	63.56	63.68	74.00	10.32	Peak

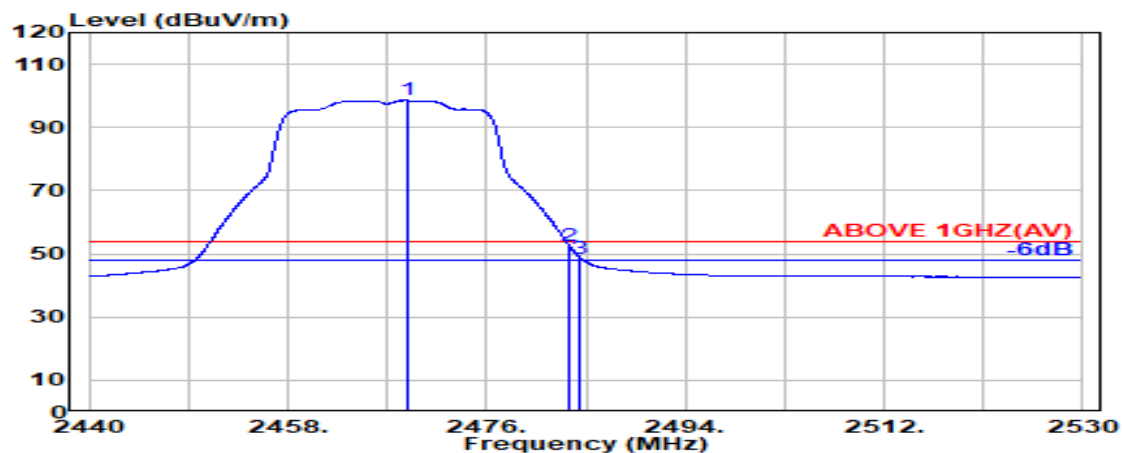

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.750	28.44	6.15	34.51	98.49	98.56	---	---	Average
2483.500	28.47	6.17	34.52	52.31	52.43	54.00	1.57	Average
2484.500	28.47	6.17	34.52	48.50	48.63	54.00	5.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

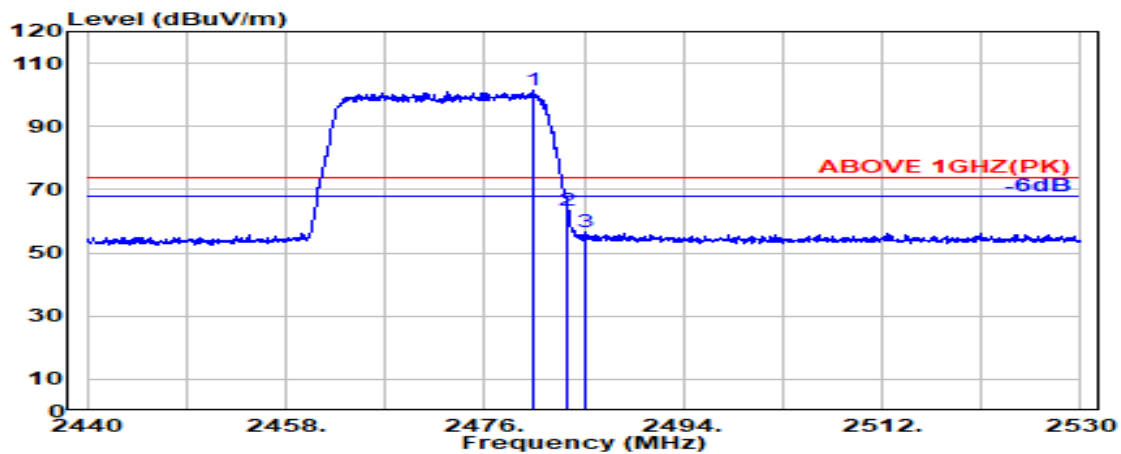

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.300	28.46	6.16	34.52	101.29	101.40	---	---	Peak
2483.500	28.47	6.17	34.52	63.47	63.59	74.00	10.41	Peak
2485.150	28.47	6.17	34.52	56.55	56.67	74.00	17.33	Peak

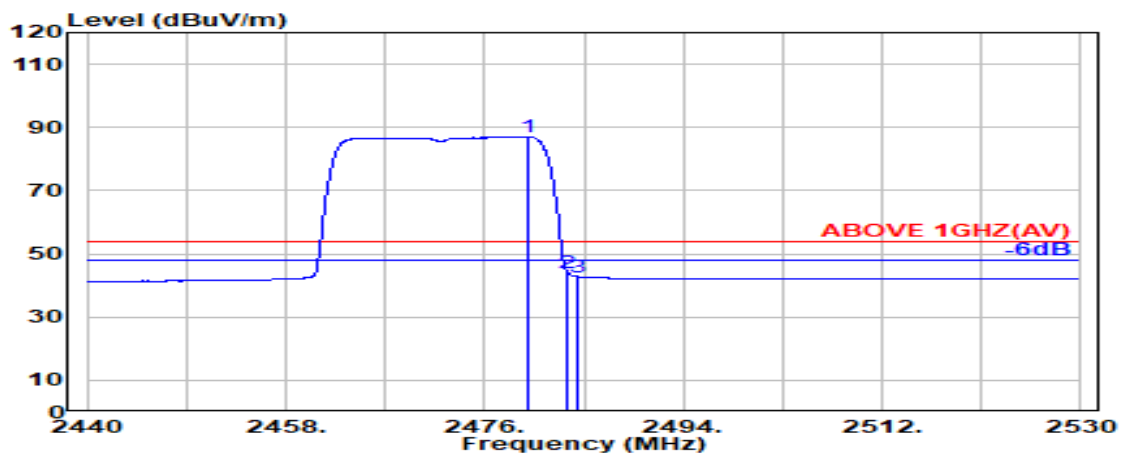

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.900	28.46	6.16	34.52	86.95	87.06	---	---	Average
2483.500	28.47	6.17	34.52	44.00	44.12	54.00	9.88	Average
2484.500	28.47	6.17	34.52	42.62	42.74	54.00	11.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

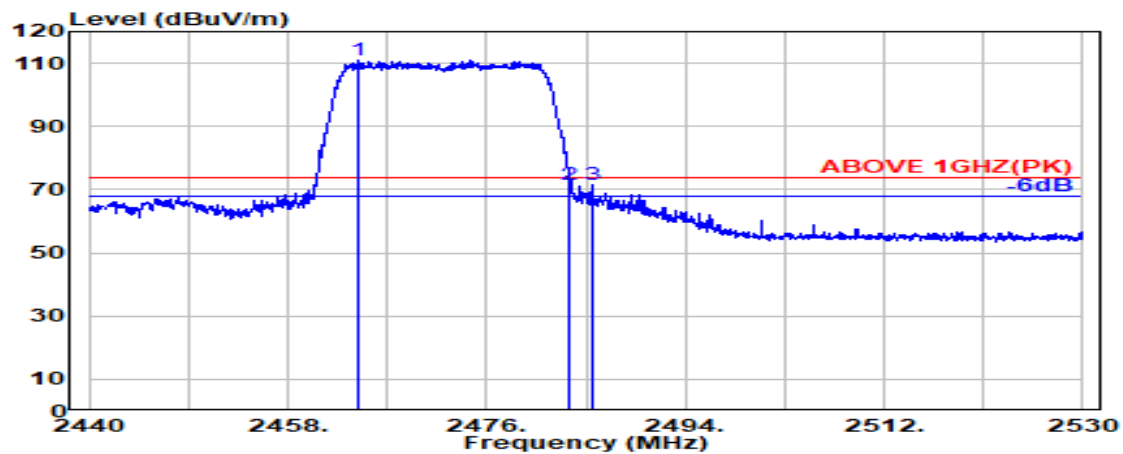

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.43	6.14	34.51	111.08	111.13	---	---	Peak
2483.500	28.47	6.17	34.52	71.51	71.63	74.00	2.37	Peak
2485.600	28.47	6.17	34.52	71.47	71.59	74.00	2.41	Peak

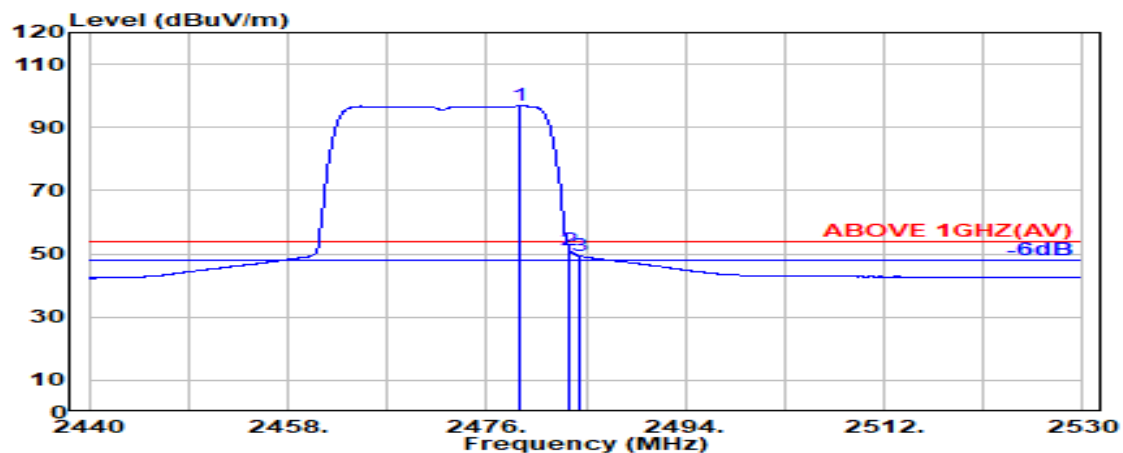

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.46	6.16	34.52	96.75	96.86	---	---	Average
2483.500	28.47	6.17	34.52	51.27	51.39	54.00	2.61	Average
2484.500	28.47	6.17	34.52	49.22	49.34	54.00	4.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

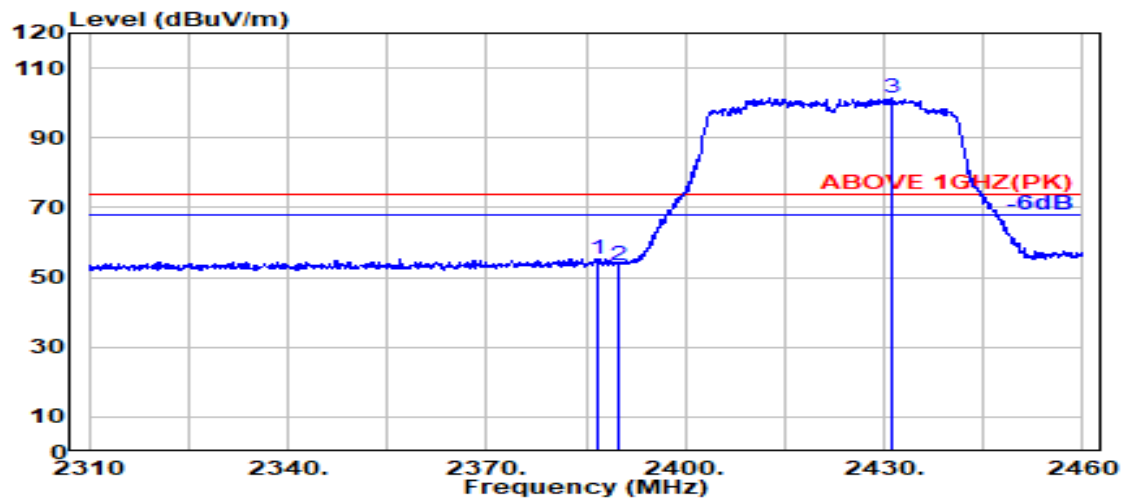

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.600	28.21	6.03	34.50	55.69	55.43	74.00	18.57	Peak
2390.000	28.18	6.03	34.50	53.90	53.62	74.00	20.38	Peak
@ 2431.300	28.29	6.09	34.51	101.76	101.64	---	---	Peak

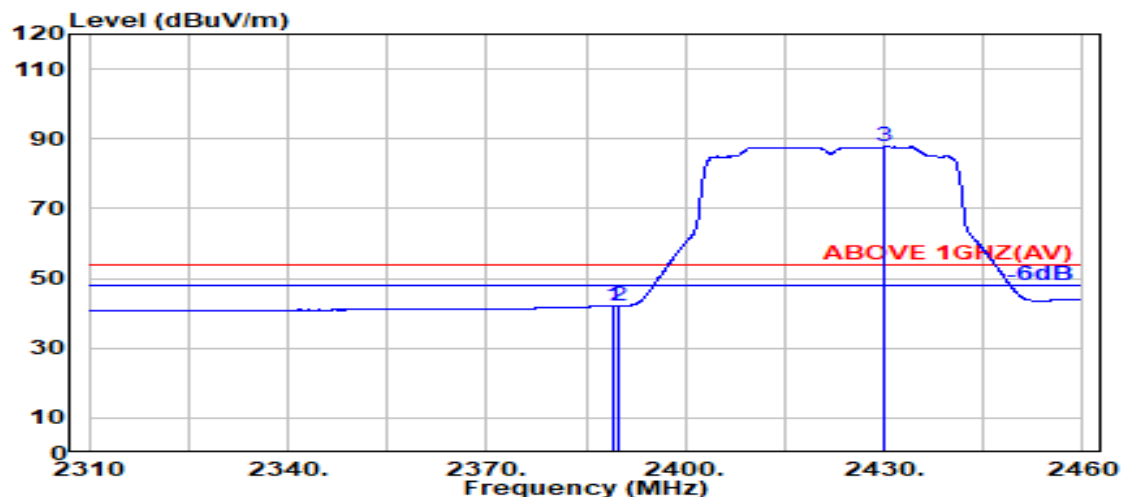

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	42.38	42.10	54.00	11.90	Average
2390.000	28.18	6.03	34.50	42.31	42.03	54.00	11.97	Average
@ 2430.100	28.28	6.09	34.51	87.83	87.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

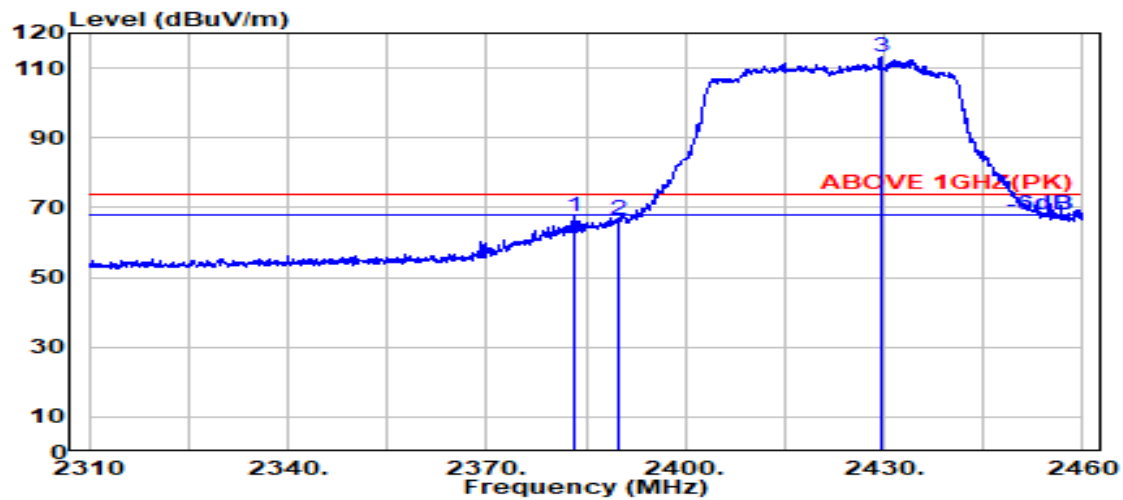

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.100	28.23	6.02	34.50	67.79	67.55	74.00	6.45	Peak
2390.000	28.18	6.03	34.50	66.84	66.55	74.00	7.45	Peak
@ 2429.500	28.28	6.09	34.51	113.12	112.99	---	---	Peak

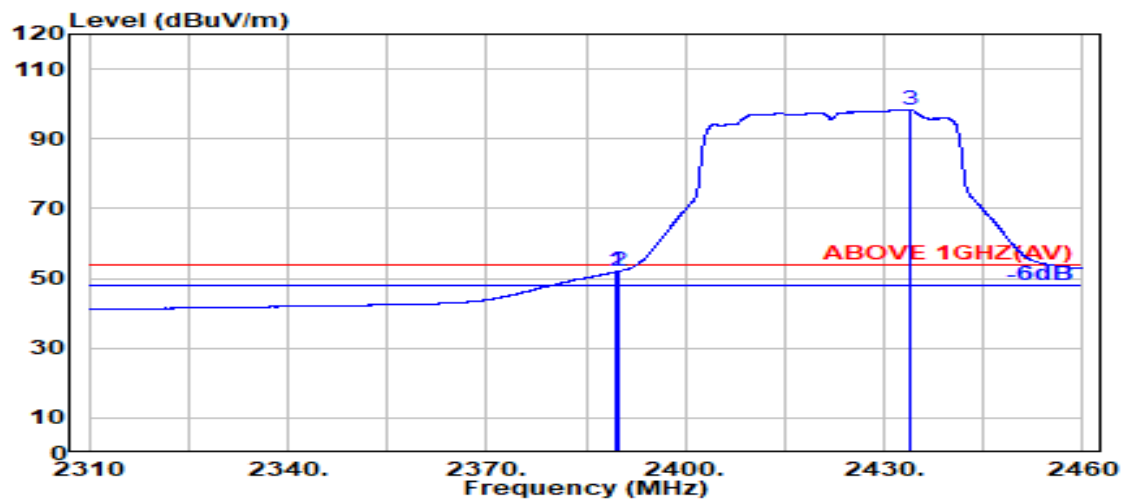


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	52.20	51.92	54.00	2.08	Average
2390.000	28.18	6.03	34.50	52.36	52.08	54.00	1.92	Average
@ 2434.000	28.30	6.10	34.51	98.37	98.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2452 MHz
------	---------------	-----------	-------------

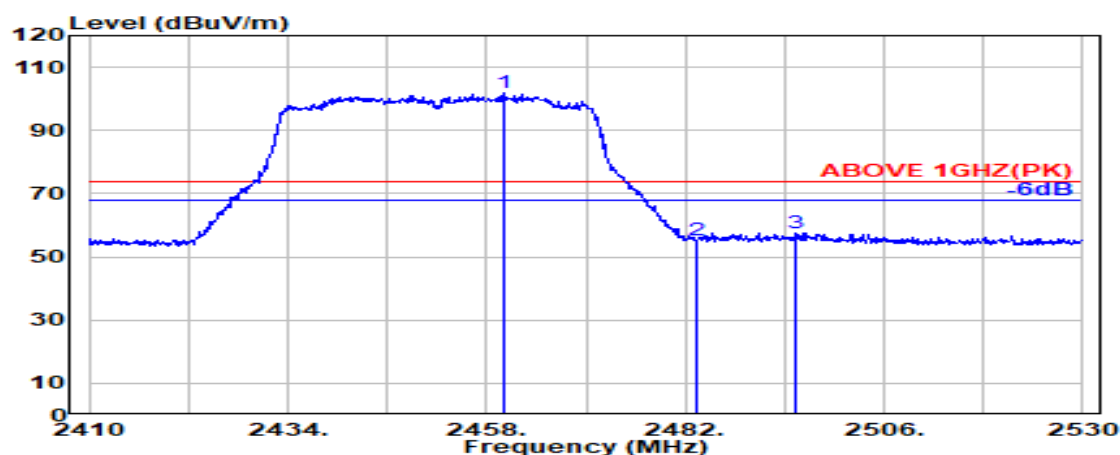

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.200	28.42	6.13	34.51	101.76	101.80	---	---	Peak
2483.500	28.47	6.17	34.52	55.26	55.38	74.00	18.62	Peak
2495.300	28.49	6.18	34.52	57.43	57.59	74.00	16.41	Peak

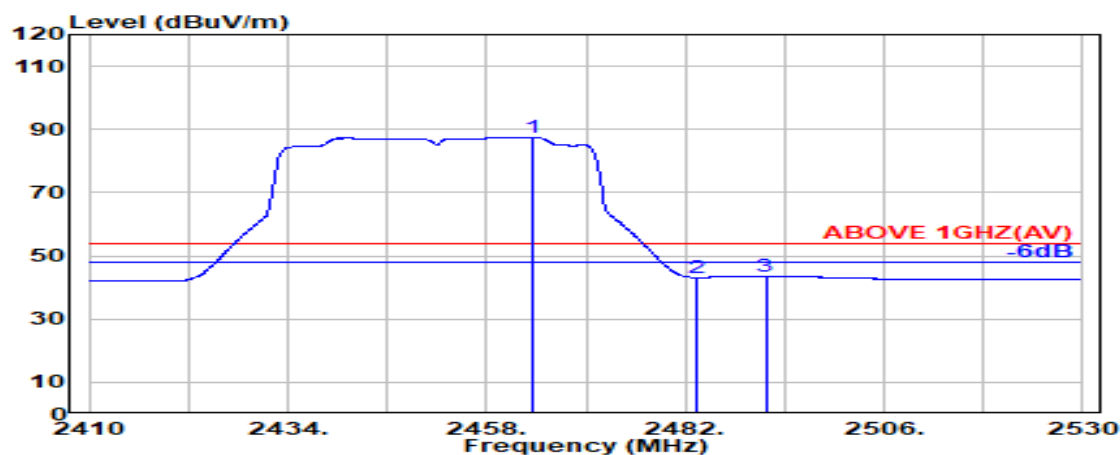

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.500	28.43	6.14	34.51	87.45	87.51	---	---	Average
2483.500	28.47	6.17	34.52	43.03	43.15	54.00	10.85	Average
2491.700	28.48	6.18	34.52	43.38	43.53	54.00	10.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452 MHz
------	---------------	-----------	-------------

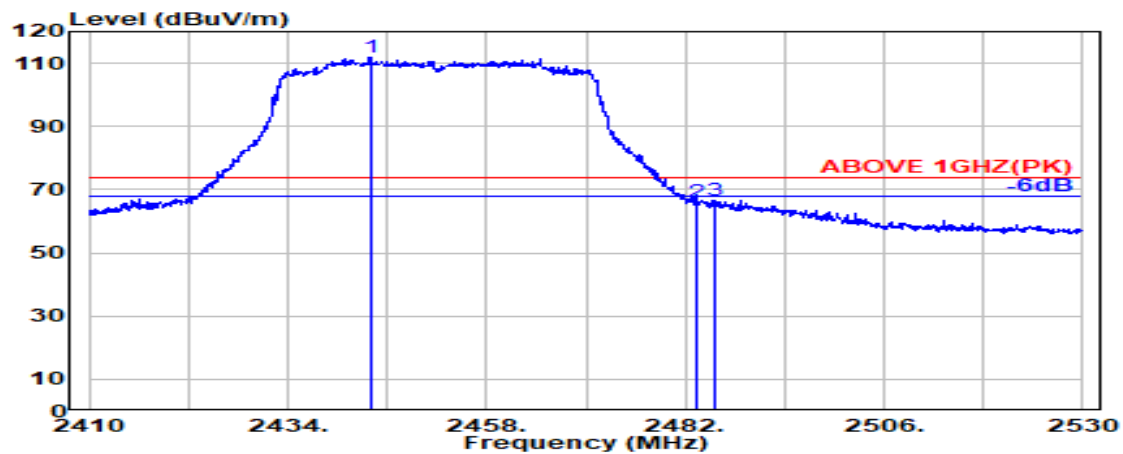

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.000	28.36	6.11	34.51	112.04	112.01	---	---	Peak
2483.500	28.47	6.17	34.52	66.17	66.29	74.00	7.71	Peak
2485.700	28.47	6.17	34.52	66.65	66.77	74.00	7.23	Peak

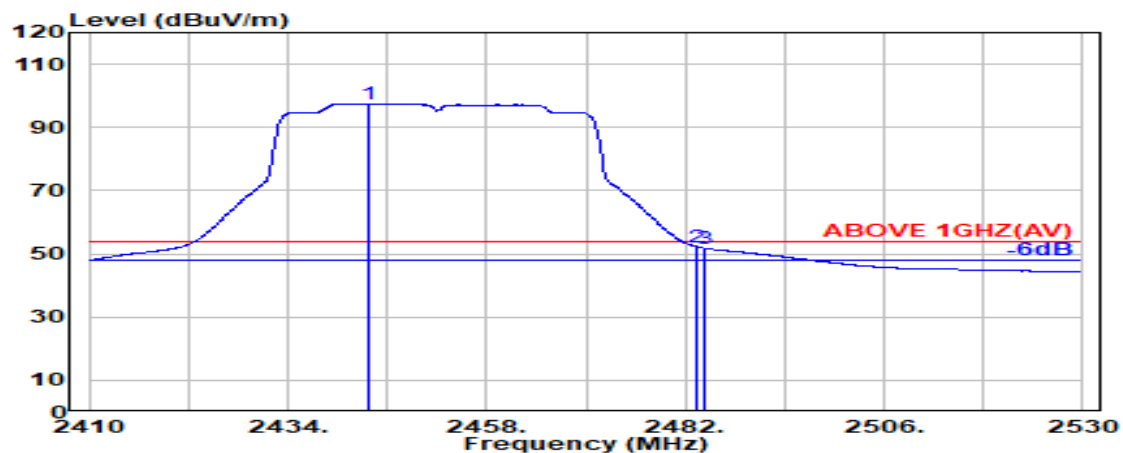

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2443.800	28.36	6.11	34.51	97.56	97.52	---	---	Average
2483.500	28.47	6.17	34.52	52.09	52.21	54.00	1.79	Average
2484.400	28.47	6.17	34.52	51.62	51.74	54.00	2.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457 MHz
------	---------------	-----------	-------------

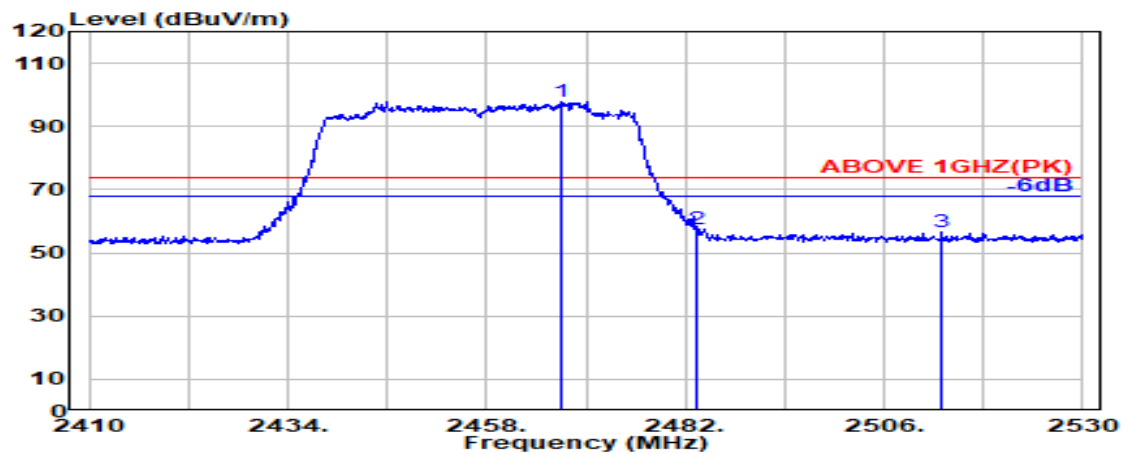

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.900	28.43	6.14	34.51	97.93	98.00	---	---	Peak
2483.500	28.47	6.17	34.52	57.44	57.56	74.00	16.44	Peak
2512.900	28.58	6.21	34.52	56.56	56.83	74.00	17.17	Peak

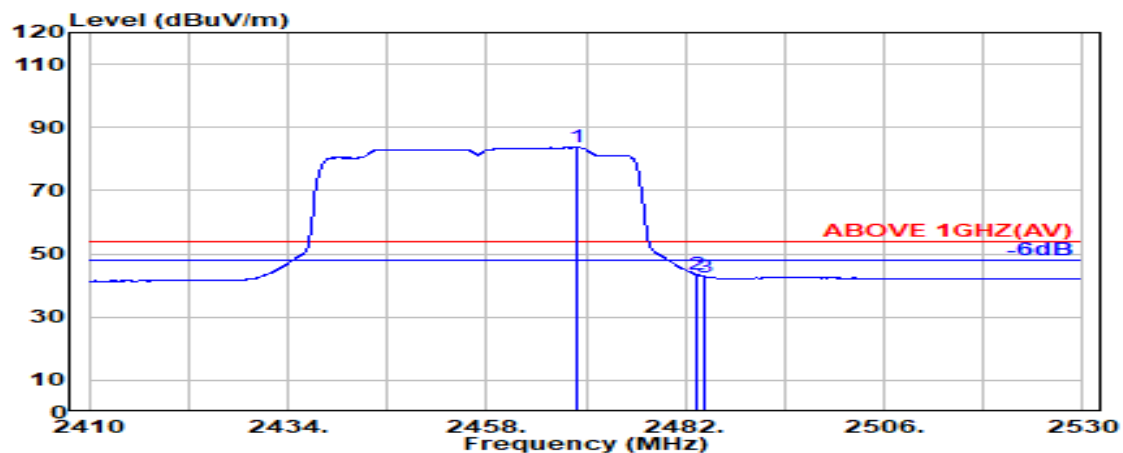

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	28.44	6.15	34.51	83.56	83.63	---	---	Average
2483.500	28.47	6.17	34.52	43.24	43.36	54.00	10.64	Average
2484.400	28.47	6.17	34.52	42.67	42.79	54.00	11.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457 MHz
------	---------------	-----------	-------------

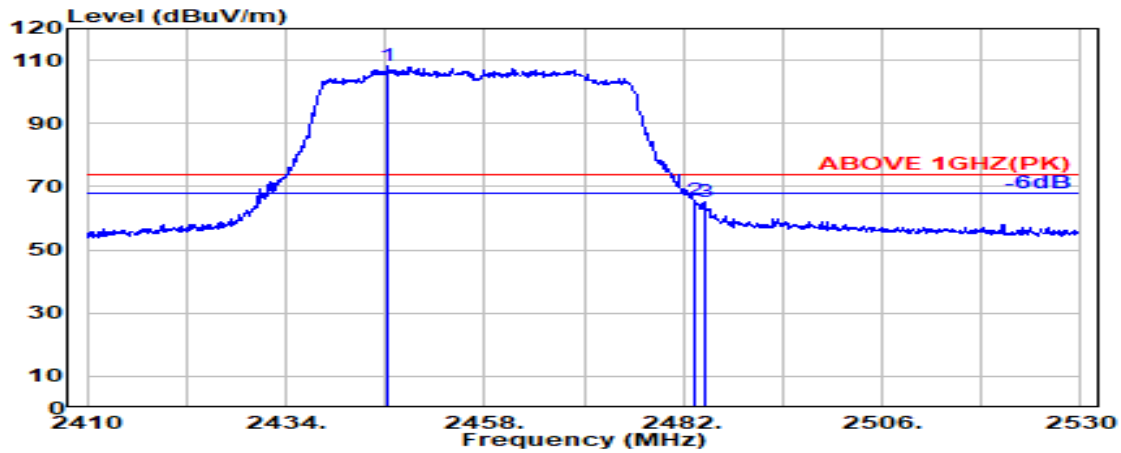

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2446.300	28.38	6.12	34.51	108.43	108.41	---	---	Peak
2483.500	28.47	6.17	34.52	65.73	65.85	74.00	8.15	Peak
2484.500	28.47	6.17	34.52	64.91	65.03	74.00	8.97	Peak

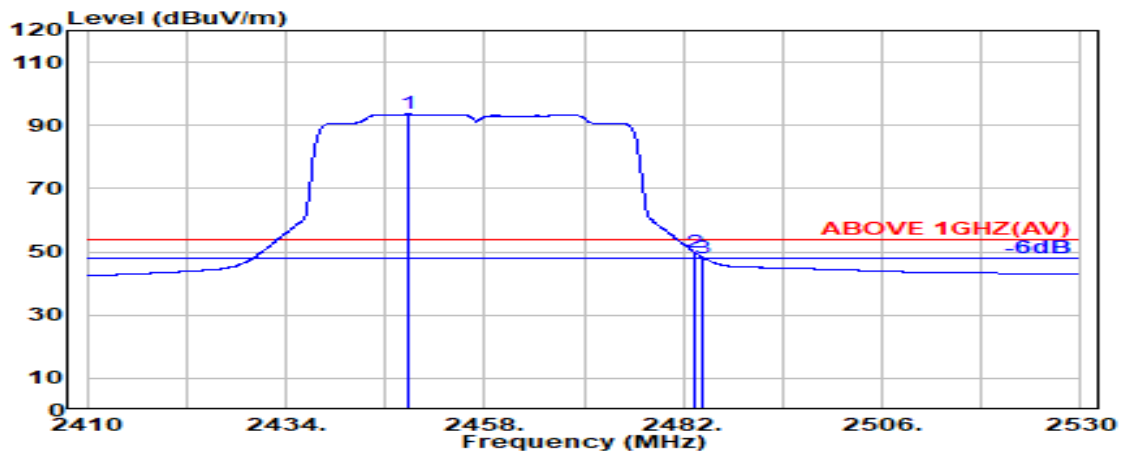

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.800	28.39	6.12	34.51	93.58	93.58	---	---	Average
2483.500	28.47	6.17	34.52	49.55	49.67	54.00	4.33	Average
2484.400	28.47	6.17	34.52	48.02	48.15	54.00	5.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462 MHz
------	---------------	-----------	-------------



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.500	28.46	6.16	34.52	98.66	98.76	---	---	Peak
2483.500	28.47	6.17	34.52	63.85	63.97	74.00	10.03	Peak
2512.100	28.57	6.20	34.52	57.25	57.51	74.00	16.49	Peak

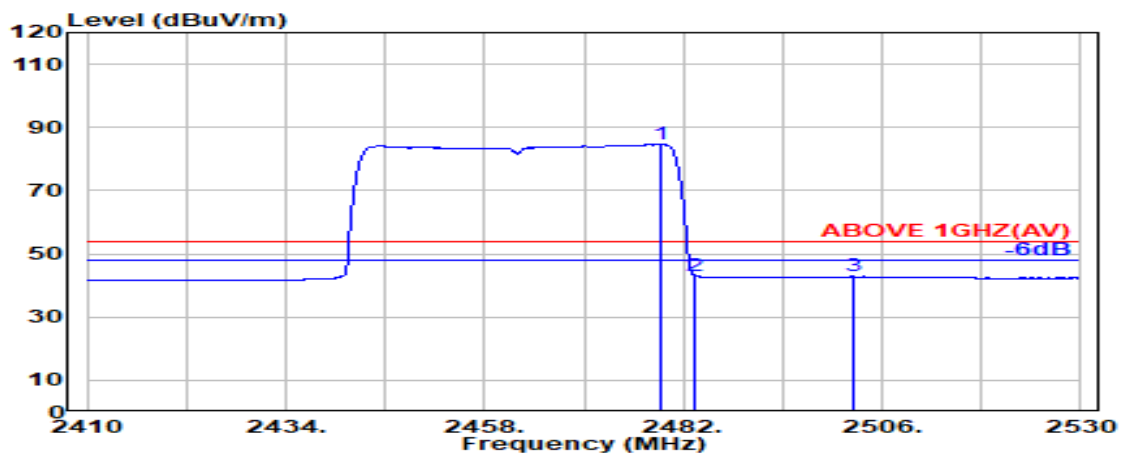

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.300	28.46	6.16	34.52	84.51	84.61	---	---	Average
2483.500	28.47	6.17	34.52	43.09	43.21	54.00	10.79	Average
2502.500	28.52	6.19	34.52	42.62	42.81	54.00	11.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

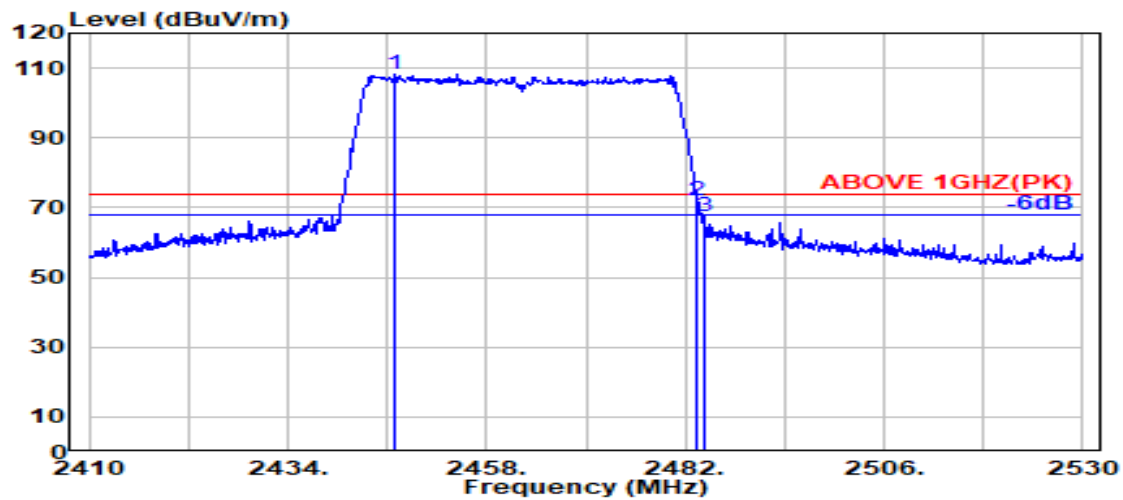

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.800	28.38	6.12	34.51	108.37	108.36	---	---	Peak
2483.500	28.47	6.17	34.52	71.97	72.08	74.00	1.92	Peak
2484.400	28.47	6.17	34.52	67.27	67.39	74.00	6.61	Peak

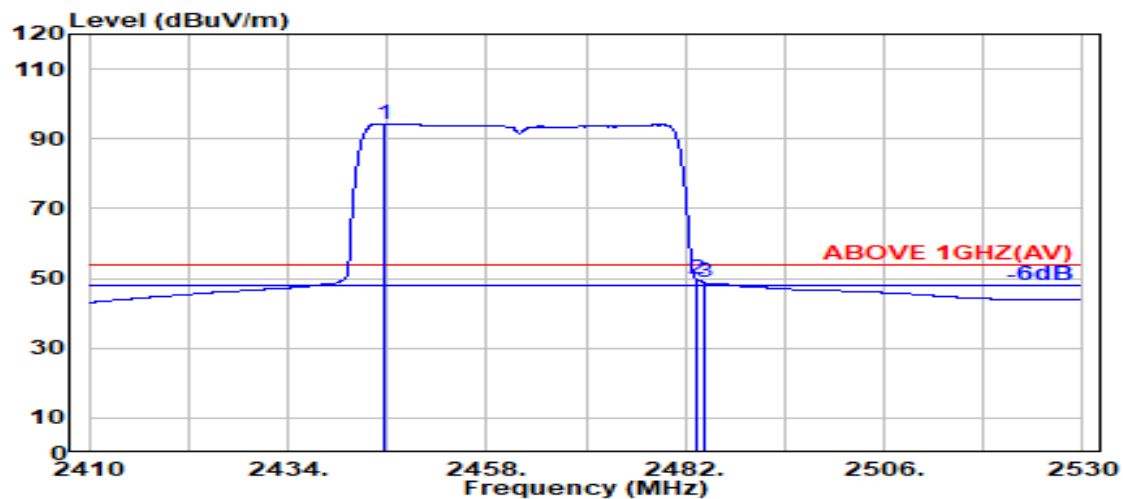

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.600	28.37	6.11	34.51	94.30	94.28	---	---	Average
2483.500	28.47	6.17	34.52	49.58	49.70	54.00	4.30	Average
2484.400	28.47	6.17	34.52	48.63	48.75	54.00	5.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

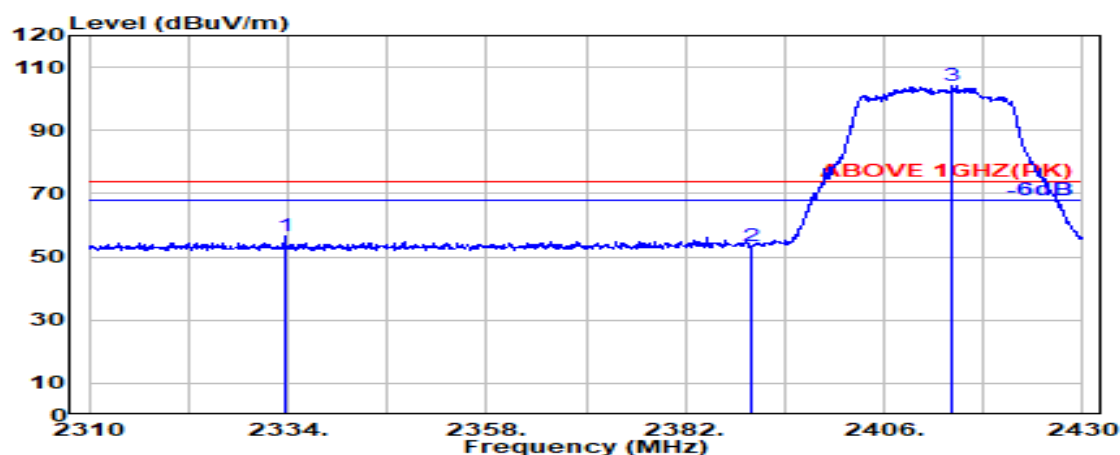

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2333.600	28.37	5.95	34.49	56.78	56.62	74.00	17.38	Peak
2390.000	28.18	6.03	34.50	53.93	53.64	74.00	20.36	Peak
@ 2414.300	28.19	6.07	34.50	104.48	104.24	---	---	Peak

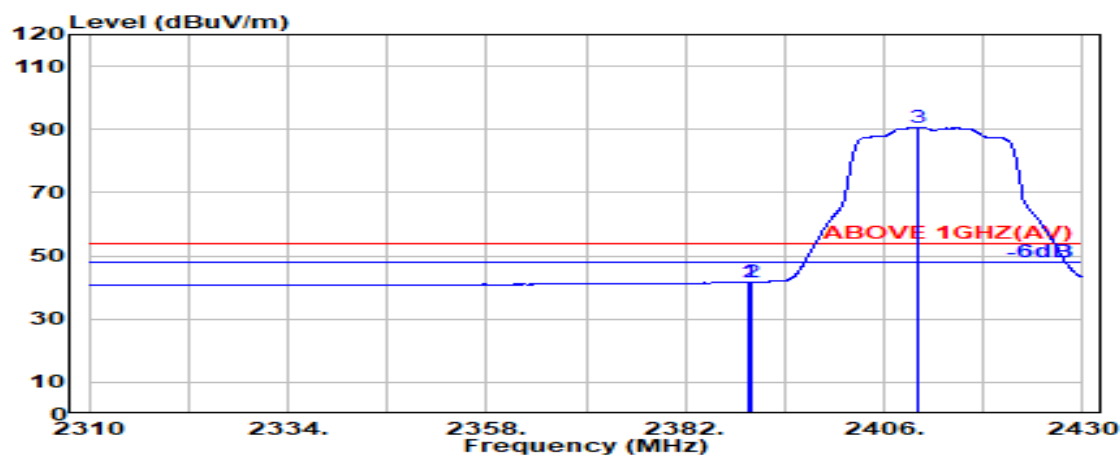


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.98	41.70	54.00	12.30	Average
2390.000	28.18	6.03	34.50	41.99	41.71	54.00	12.29	Average
@ 2410.100	28.16	6.06	34.50	90.77	90.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

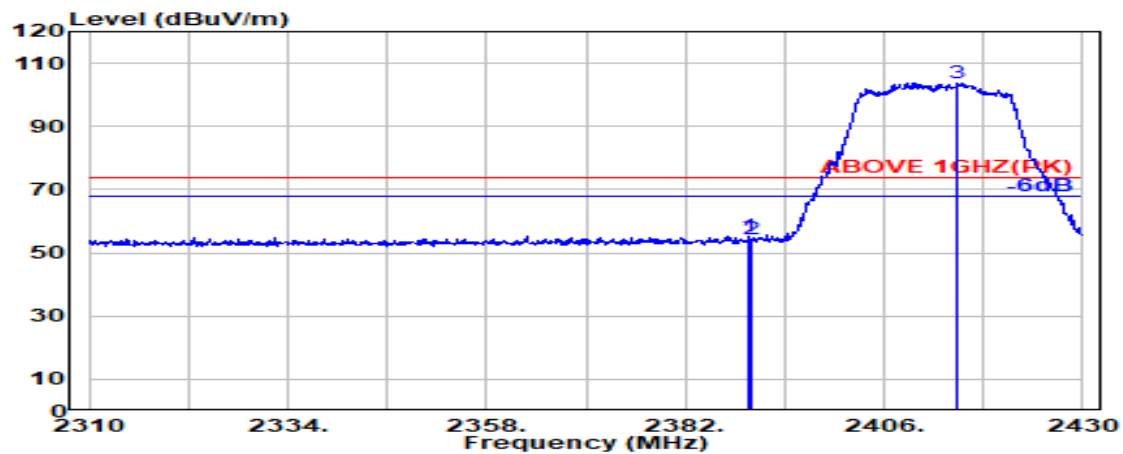

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	55.68	55.40	74.00	18.60	Peak
2390.000	28.18	6.03	34.50	54.44	54.15	74.00	19.85	Peak
@ 2414.900	28.19	6.07	34.50	103.97	103.73	---	---	Peak

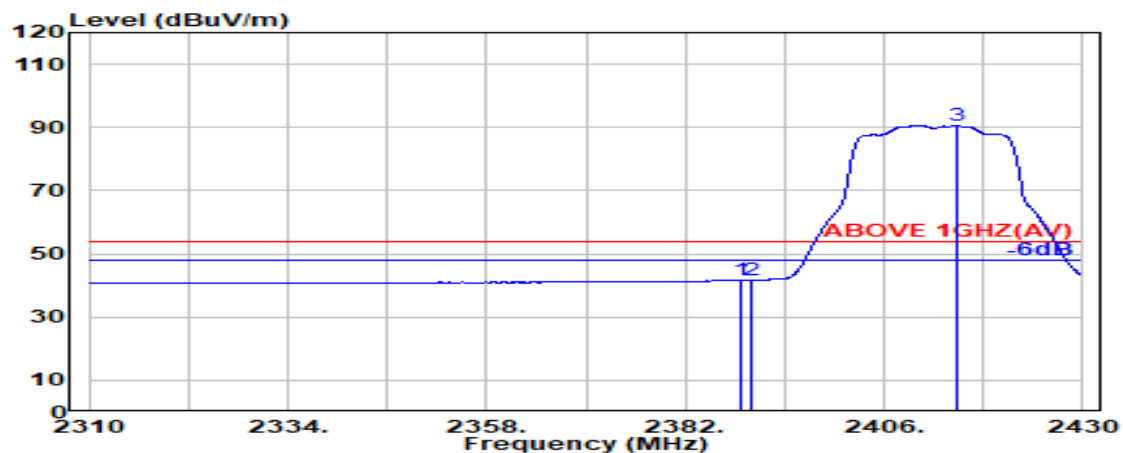

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.50	41.93	41.65	54.00	12.35	Average
2390.000	28.18	6.03	34.50	41.98	41.70	54.00	12.30	Average
@ 2414.900	28.19	6.07	34.50	90.69	90.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

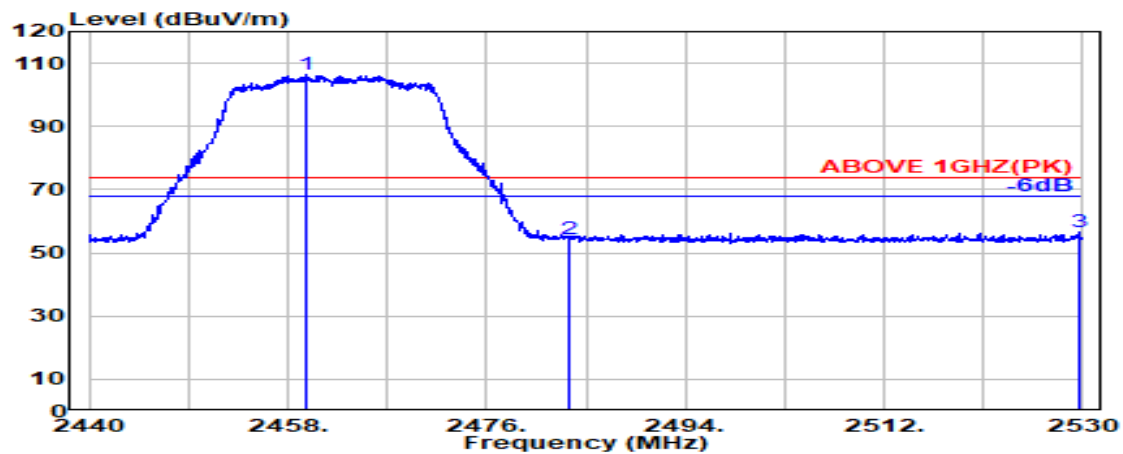

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.550	28.42	6.13	34.51	106.29	106.33	---	---	Peak
2483.500	28.47	6.17	34.52	54.21	54.33	74.00	19.67	Peak
2529.700	28.68	6.22	34.53	56.19	56.57	74.00	17.43	Peak

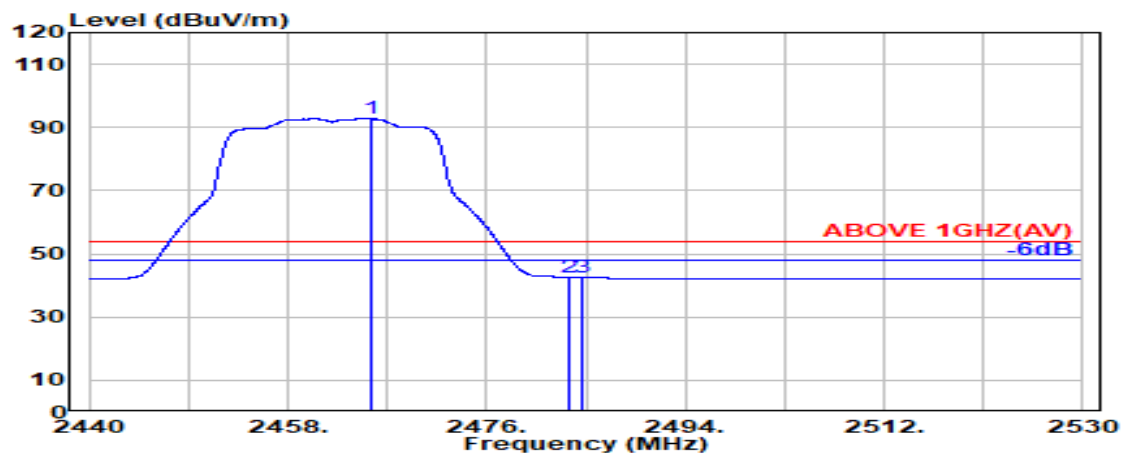

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.650	28.43	6.14	34.51	92.74	92.80	---	---	Average
2483.500	28.47	6.17	34.52	42.45	42.57	54.00	11.43	Average
2484.600	28.47	6.17	34.52	42.37	42.49	54.00	11.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

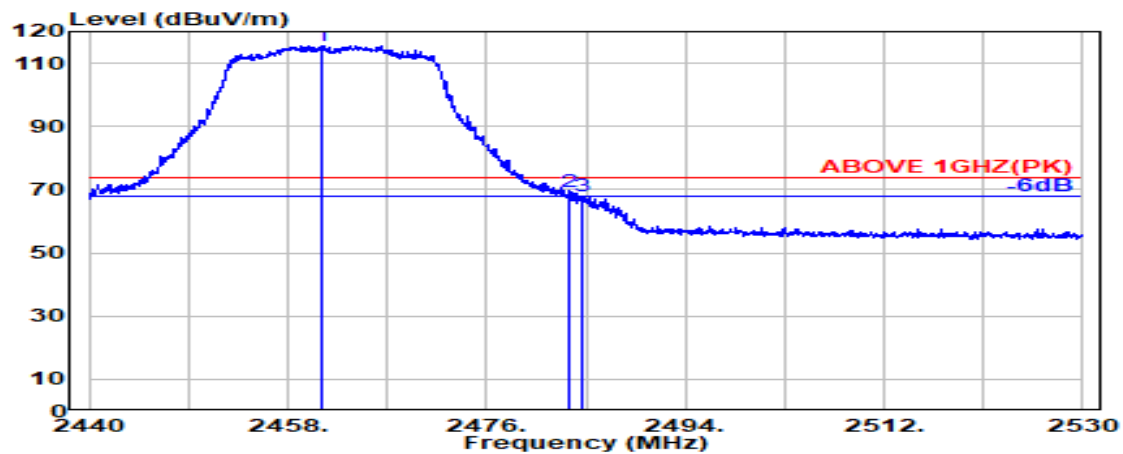

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.150	28.42	6.14	34.51	115.56	115.61	---	---	Peak
2483.500	28.47	6.17	34.52	69.01	69.13	74.00	4.87	Peak
2484.750	28.47	6.17	34.52	68.00	68.13	74.00	5.87	Peak

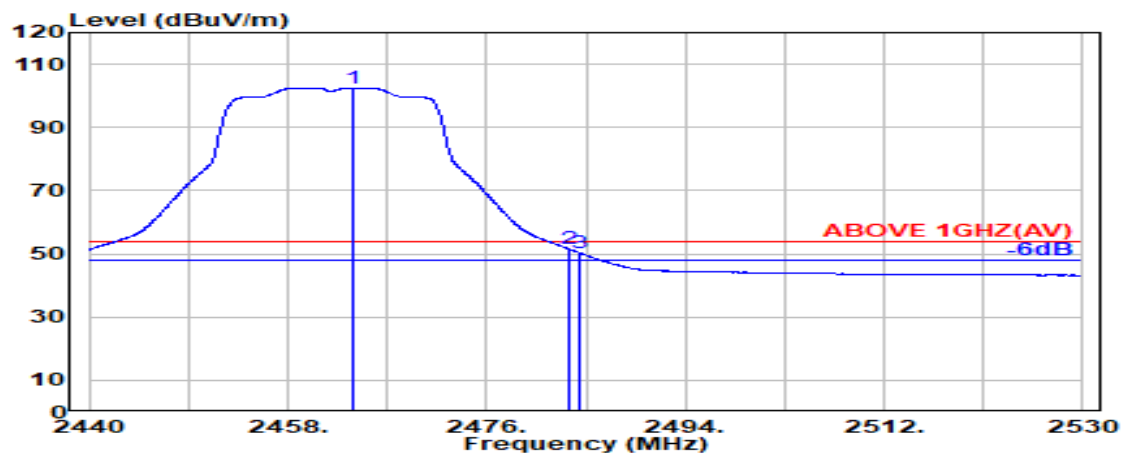


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.900	28.43	6.14	34.51	102.46	102.52	---	---	Average
2483.500	28.47	6.17	34.52	51.38	51.50	54.00	2.50	Average
2484.500	28.47	6.17	34.52	50.08	50.20	54.00	3.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

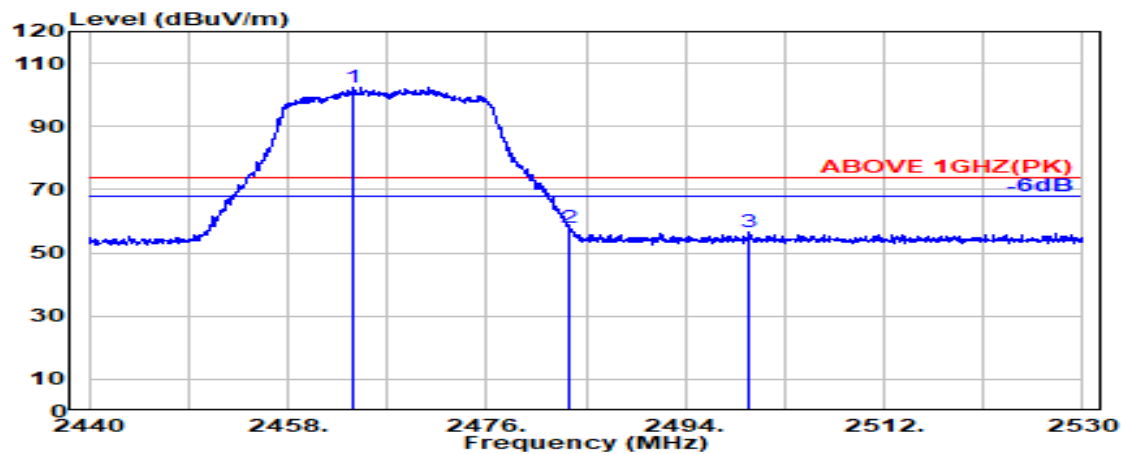

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.950	28.43	6.14	34.51	102.24	102.30	---	---	Peak
2483.500	28.47	6.17	34.52	57.96	58.08	74.00	15.92	Peak
2499.850	28.50	6.19	34.52	56.29	56.46	74.00	17.54	Peak

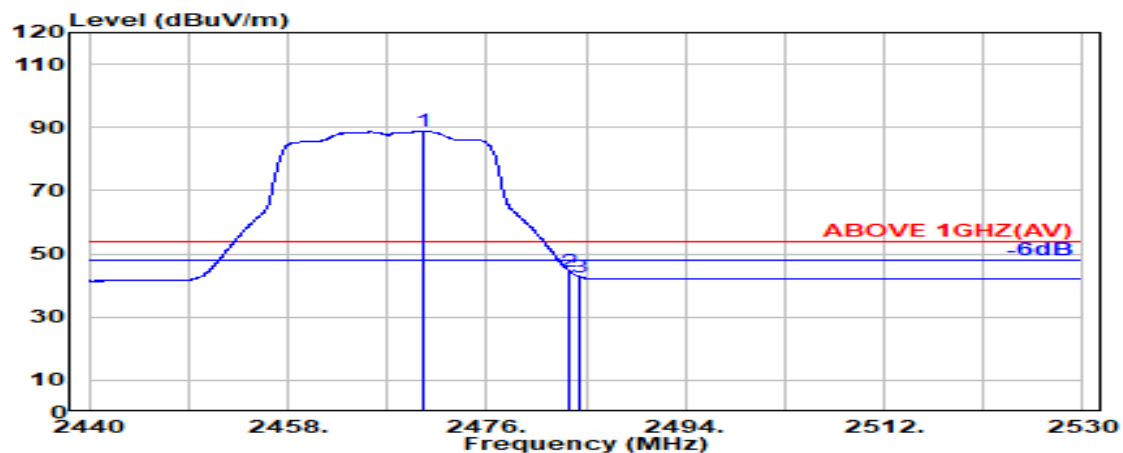


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.250	28.44	6.15	34.51	88.58	88.66	---	---	Average
2483.500	28.47	6.17	34.52	44.35	44.47	54.00	9.53	Average
2484.500	28.47	6.17	34.52	42.51	42.63	54.00	11.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

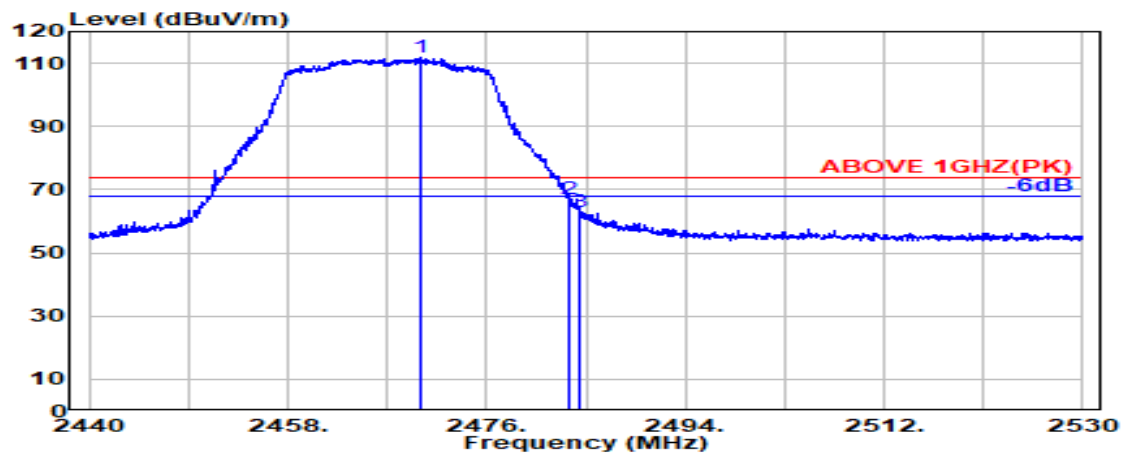

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.100	28.44	6.15	34.51	111.55	111.63	---	---	Peak
2483.500	28.47	6.17	34.52	66.69	66.81	74.00	7.19	Peak
2484.500	28.47	6.17	34.52	62.95	63.07	74.00	10.93	Peak

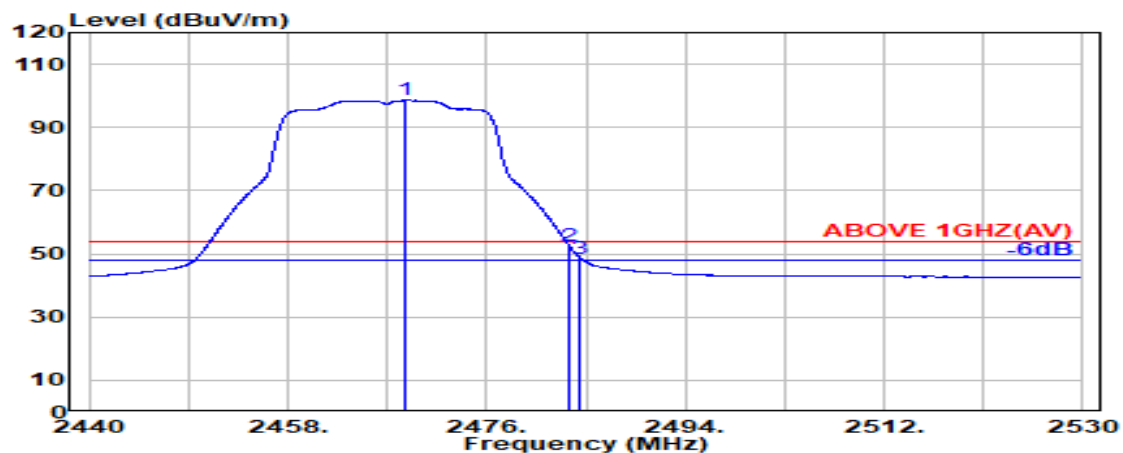

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.700	28.44	6.15	34.51	98.53	98.60	---	---	Average
2483.500	28.47	6.17	34.52	52.34	52.46	54.00	1.54	Average
2484.500	28.47	6.17	34.52	48.48	48.60	54.00	5.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

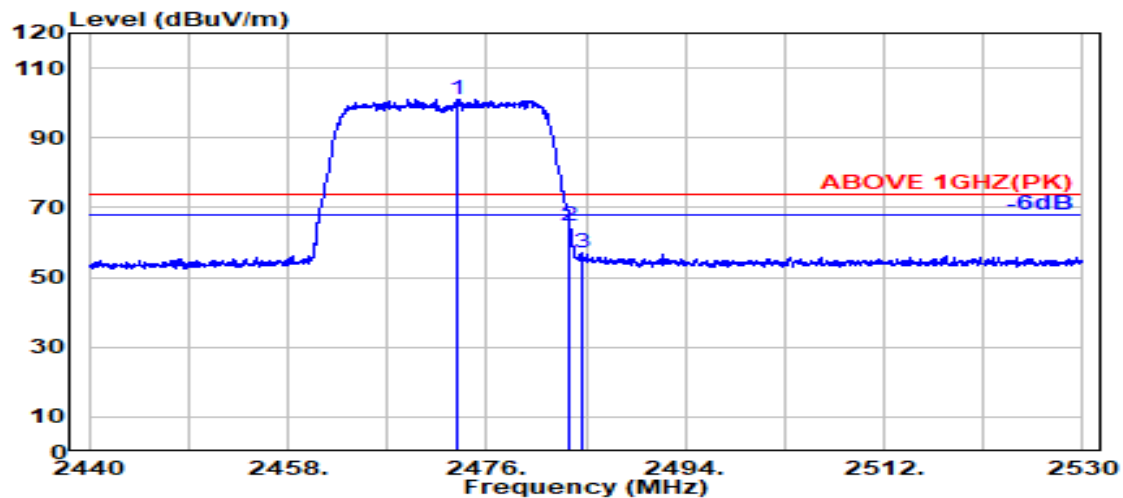

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.400	28.45	6.15	34.51	101.06	101.14	---	---	Peak
2483.500	28.47	6.17	34.52	64.47	64.58	74.00	9.42	Peak
2484.700	28.47	6.17	34.52	56.77	56.89	74.00	17.11	Peak

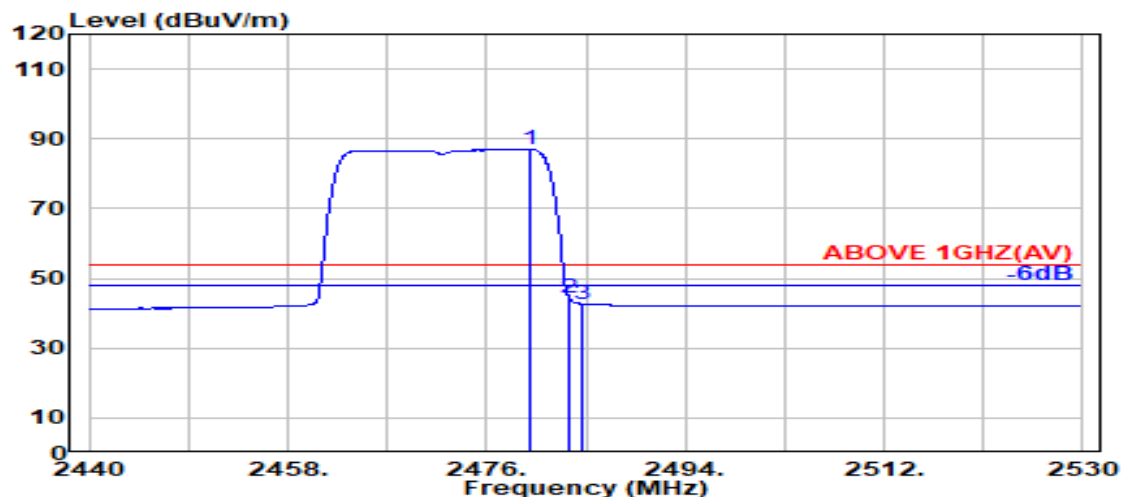

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.850	28.46	6.16	34.52	87.00	87.11	---	---	Average
2483.500	28.47	6.17	34.52	44.08	44.19	54.00	9.81	Average
2484.550	28.47	6.17	34.52	42.67	42.79	54.00	11.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

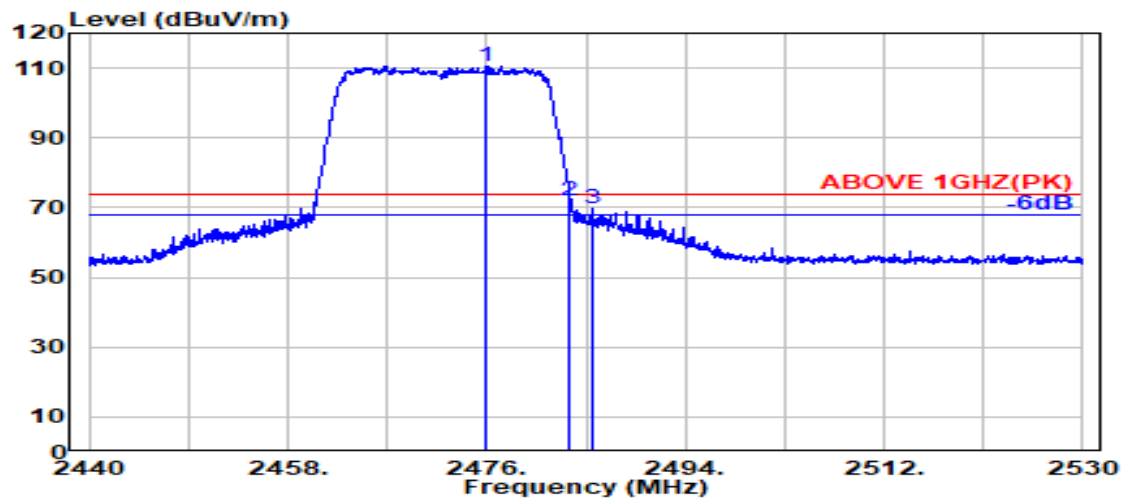

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.45	6.16	34.52	110.45	110.54	---	---	Peak
2483.500	28.47	6.17	34.52	72.08	72.20	74.00	1.80	Peak
2485.600	28.47	6.17	34.52	69.62	69.74	74.00	4.26	Peak

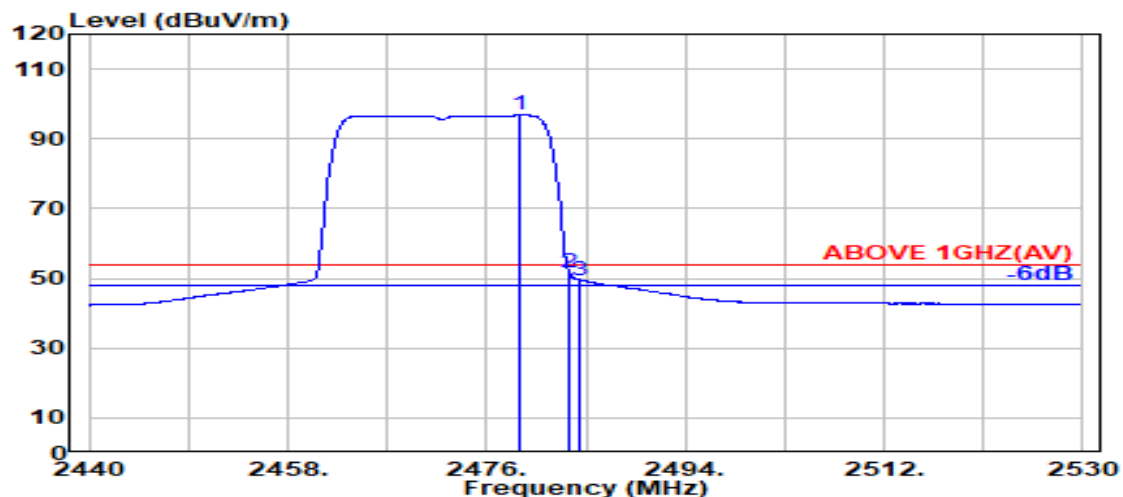

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.46	6.16	34.52	96.77	96.87	---	---	Average
2483.500	28.47	6.17	34.52	51.38	51.50	54.00	2.50	Average
2484.500	28.47	6.17	34.52	49.35	49.48	54.00	4.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

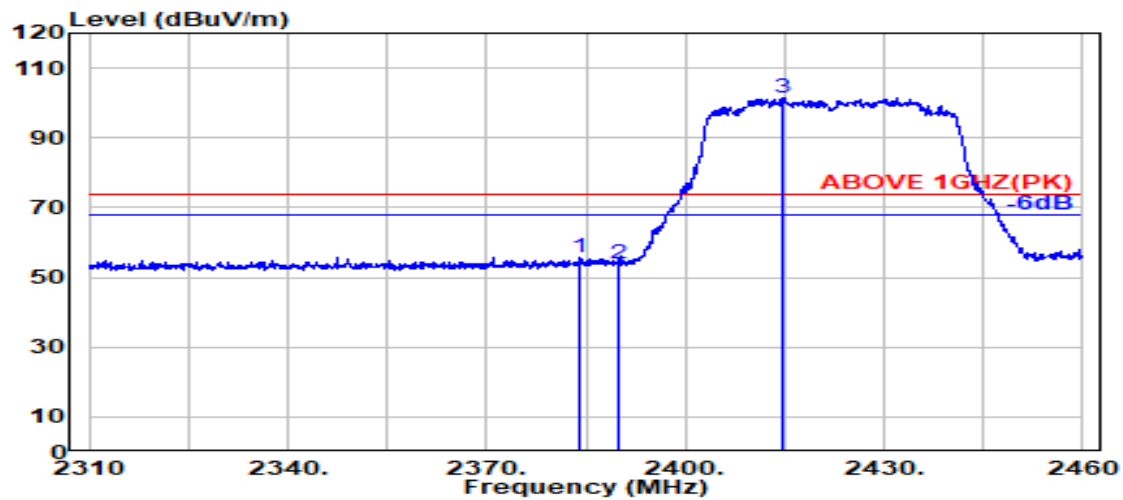

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.100	28.23	6.03	34.50	55.92	55.67	74.00	18.33	Peak
2390.000	28.18	6.03	34.50	54.38	54.10	74.00	19.90	Peak
@ 2414.700	28.19	6.07	34.50	101.84	101.60	---	---	Peak

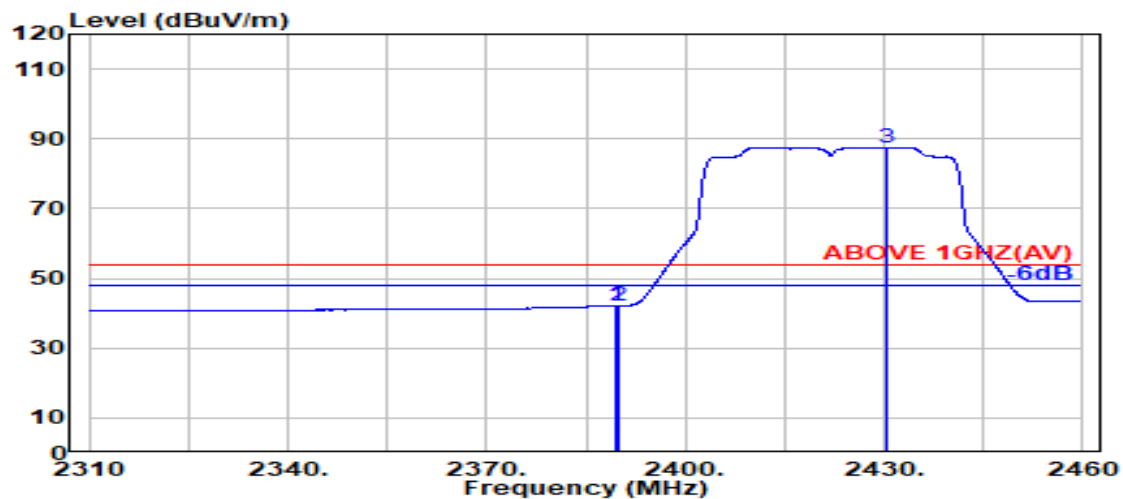

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	42.40	42.12	54.00	11.88	Average
2390.000	28.18	6.03	34.50	42.38	42.10	54.00	11.90	Average
@ 2430.300	28.28	6.09	34.51	87.72	87.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

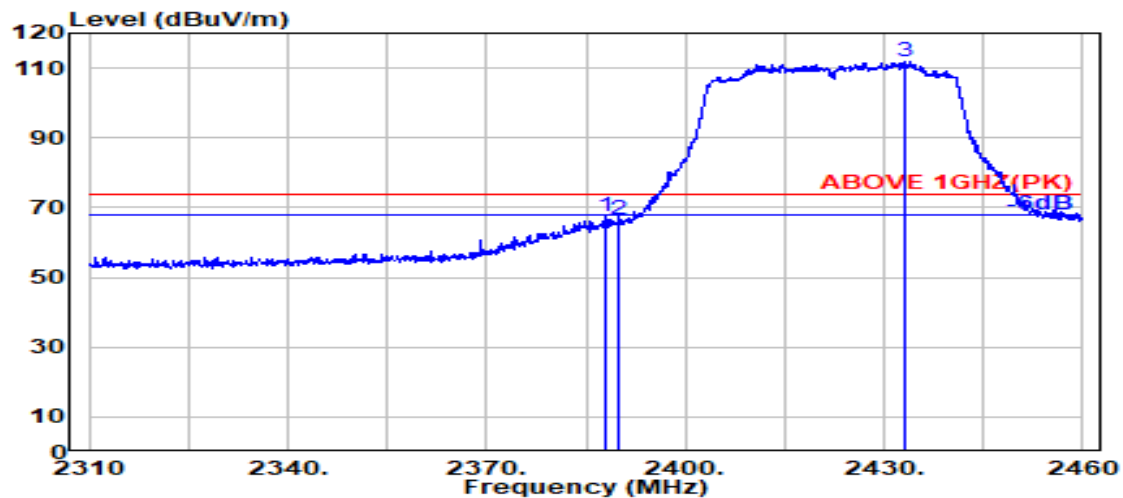

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.800	28.20	6.03	34.50	67.92	67.65	74.00	6.35	Peak
2390.000	28.18	6.03	34.50	66.92	66.63	74.00	7.37	Peak
@ 2433.000	28.30	6.10	34.51	112.04	111.92	---	---	Peak

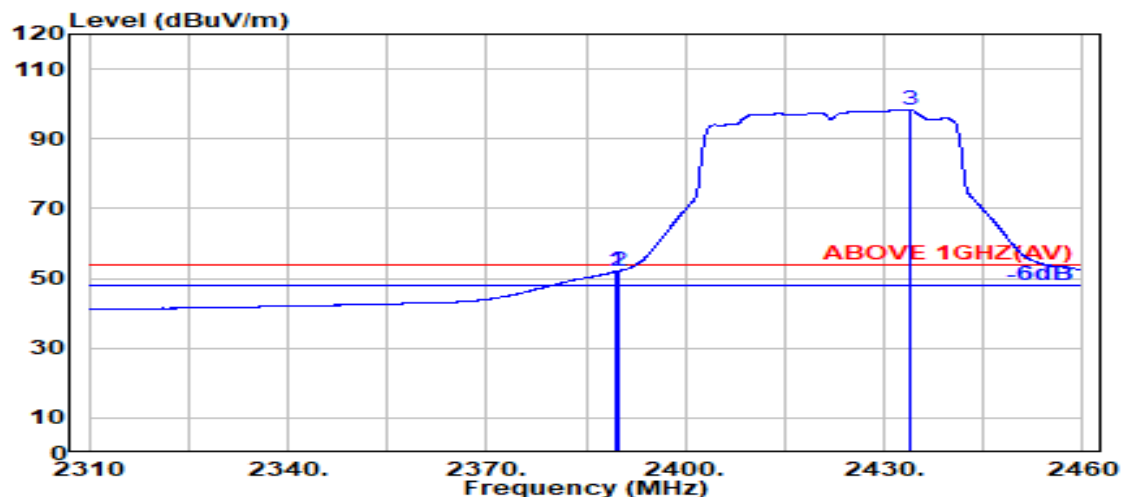

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	52.23	51.95	54.00	2.05	Average
2390.000	28.18	6.03	34.50	52.40	52.12	54.00	1.88	Average
@ 2433.800	28.30	6.10	34.51	98.36	98.25	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

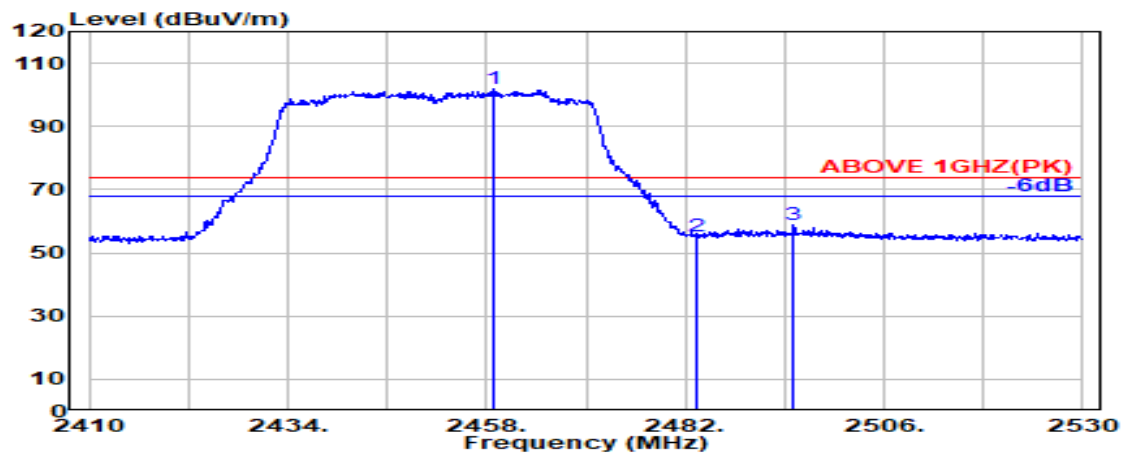

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	28.42	6.13	34.51	101.64	101.68	---	---	Peak
2483.500	28.47	6.17	34.52	55.05	55.16	74.00	18.84	Peak
2495.100	28.49	6.18	34.52	58.90	59.06	74.00	14.94	Peak

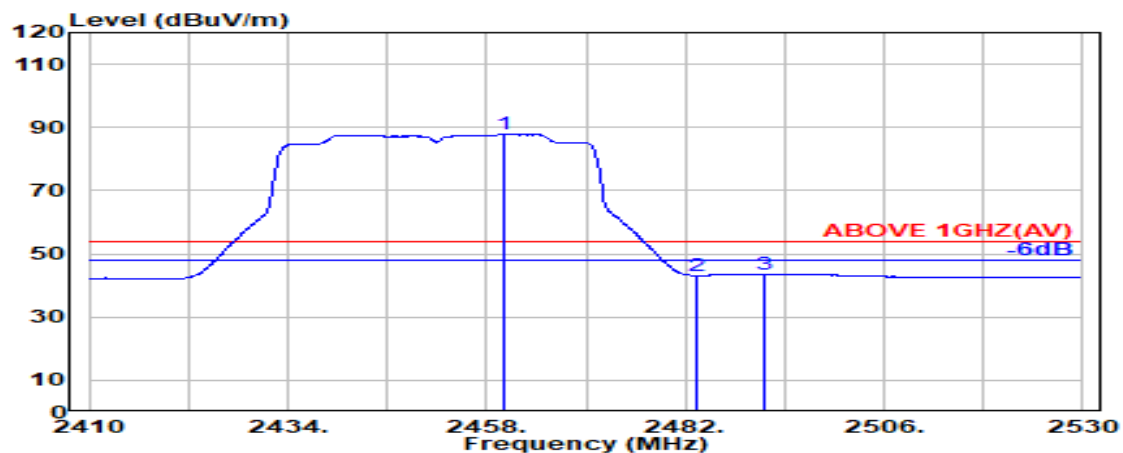


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.42	6.13	34.51	87.67	87.72	---	---	Average
2483.500	28.47	6.17	34.52	43.03	43.15	54.00	10.85	Average
2491.600	28.48	6.18	34.52	43.47	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

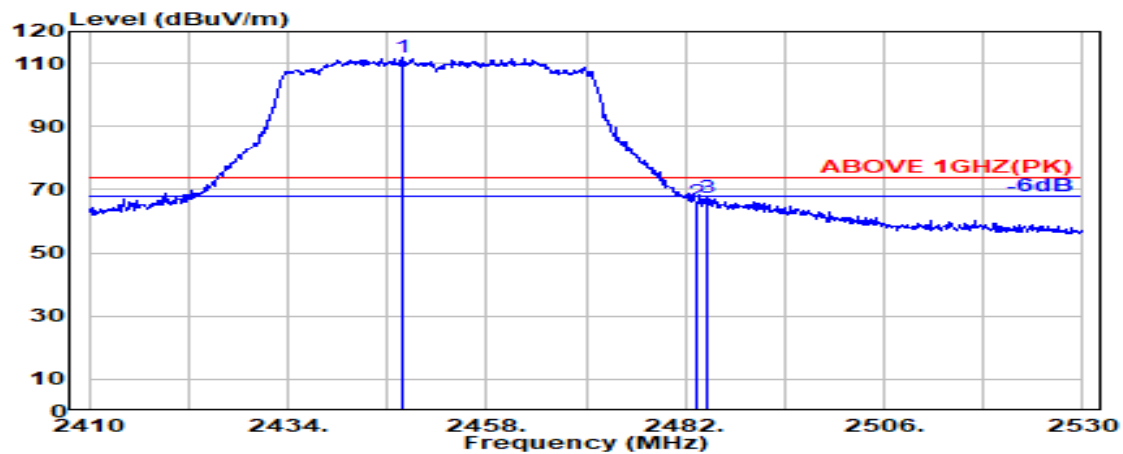

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2447.900	28.39	6.12	34.51	111.70	111.69	---	---	Peak
2483.500	28.47	6.17	34.52	66.04	66.16	74.00	7.84	Peak
2484.500	28.47	6.17	34.52	67.13	67.25	74.00	6.75	Peak

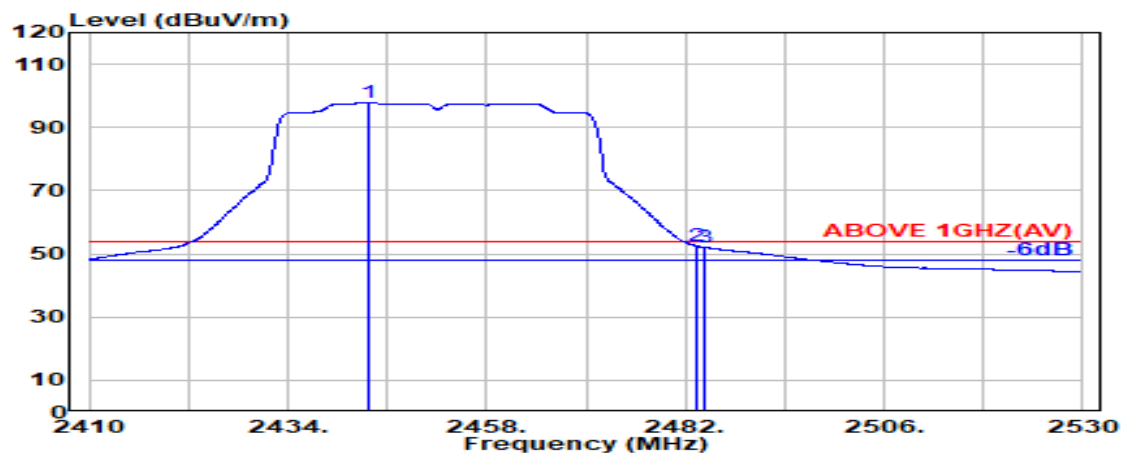

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2443.900	28.36	6.11	34.51	97.75	97.72	---	---	Average
2483.500	28.47	6.17	34.52	52.32	52.44	54.00	1.56	Average
2484.400	28.47	6.17	34.52	51.87	51.99	54.00	2.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

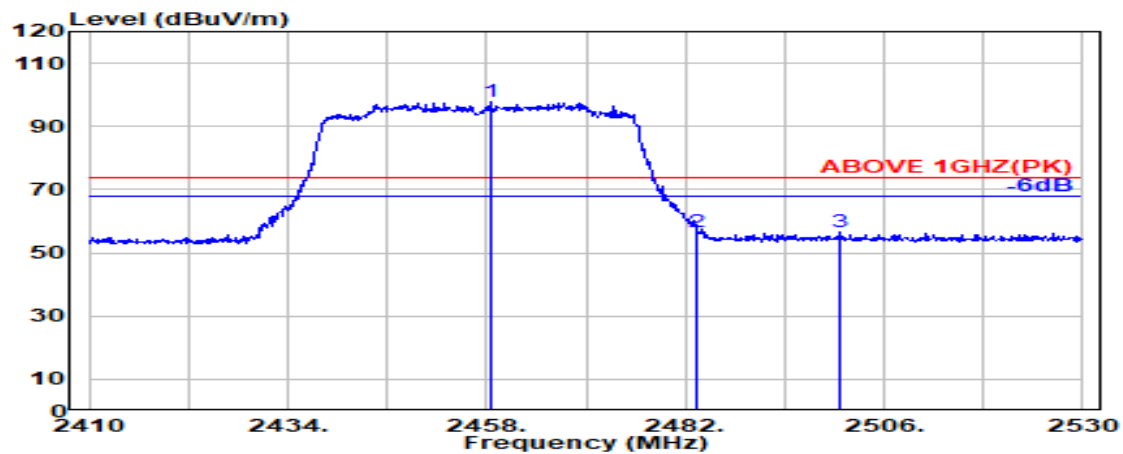

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	28.42	6.13	34.51	97.77	97.80	---	---	Peak
2483.500	28.47	6.17	34.52	56.45	56.57	74.00	17.43	Peak
2500.800	28.50	6.19	34.52	56.61	56.78	74.00	17.22	Peak

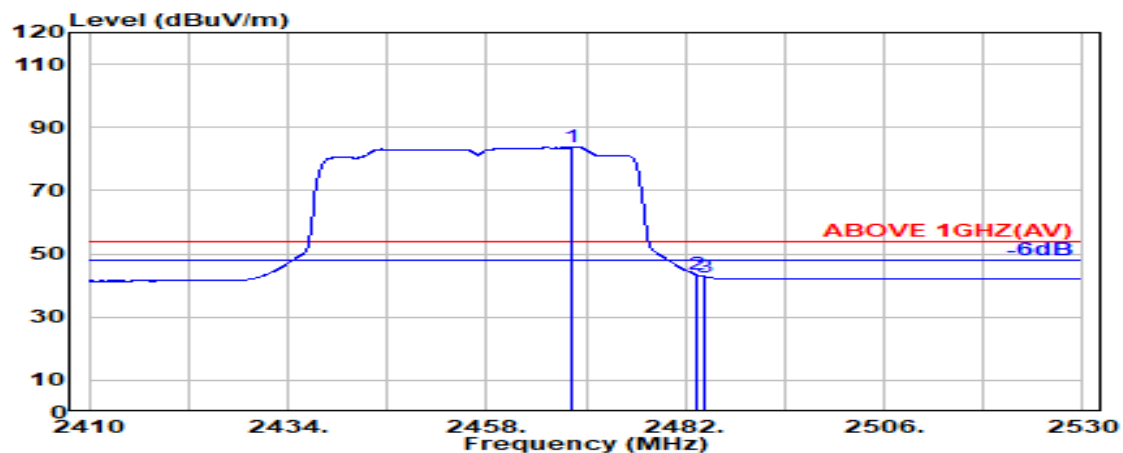

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	6.15	34.51	83.56	83.63	---	---	Average
2483.500	28.47	6.17	34.52	43.19	43.31	54.00	10.69	Average
2484.400	28.47	6.17	34.52	42.62	42.74	54.00	11.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

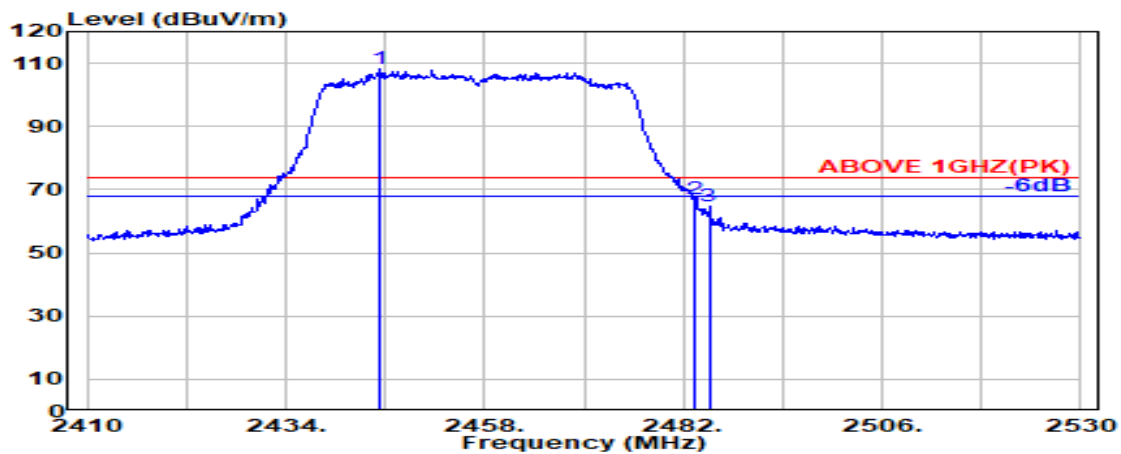

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.400	28.37	6.11	34.51	108.17	108.15	---	---	Peak
2483.500	28.47	6.17	34.52	66.72	66.84	74.00	7.16	Peak
2485.100	28.47	6.17	34.52	64.72	64.84	74.00	9.16	Peak

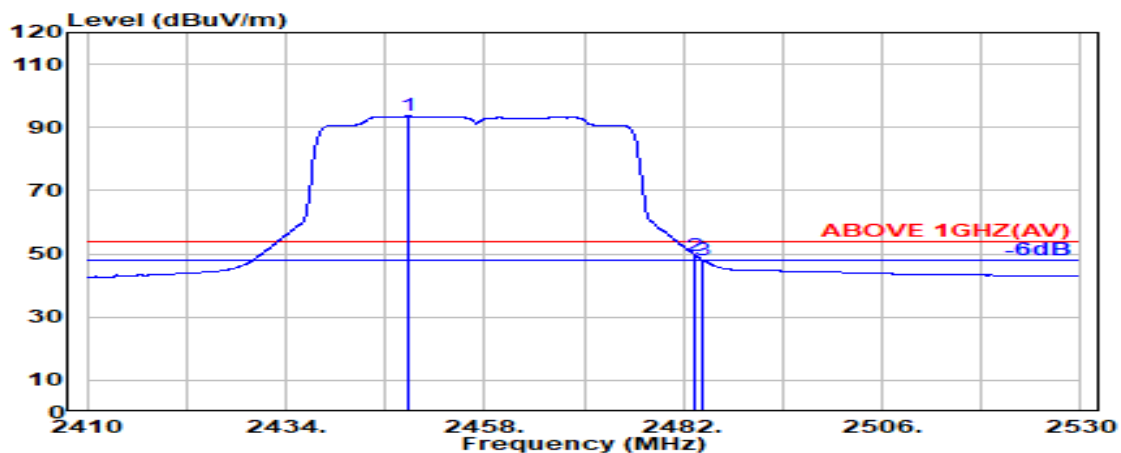

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.900	28.39	6.12	34.51	93.53	93.54	---	---	Average
2483.500	28.47	6.17	34.52	49.31	49.43	54.00	4.57	Average
2484.400	28.47	6.17	34.52	47.80	47.92	54.00	6.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

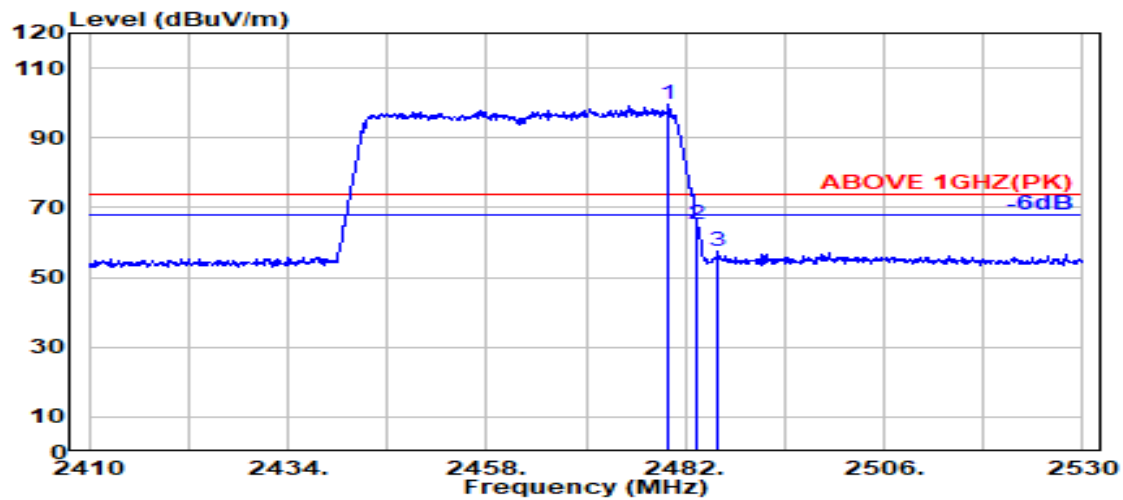

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	6.16	34.52	99.45	99.55	---	---	Peak
2483.500	28.47	6.17	34.52	65.14	65.26	74.00	8.74	Peak
2486.000	28.47	6.17	34.52	57.58	57.71	74.00	16.29	Peak

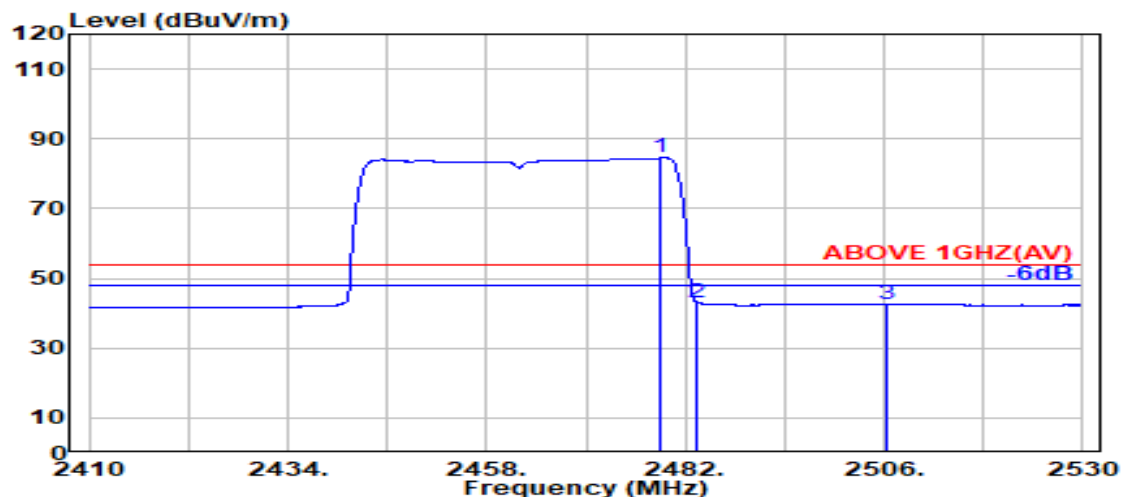

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.46	6.16	34.52	84.46	84.56	---	---	Average
2483.500	28.47	6.17	34.52	43.01	43.12	54.00	10.88	Average
2506.400	28.54	6.20	34.52	42.52	42.73	54.00	11.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

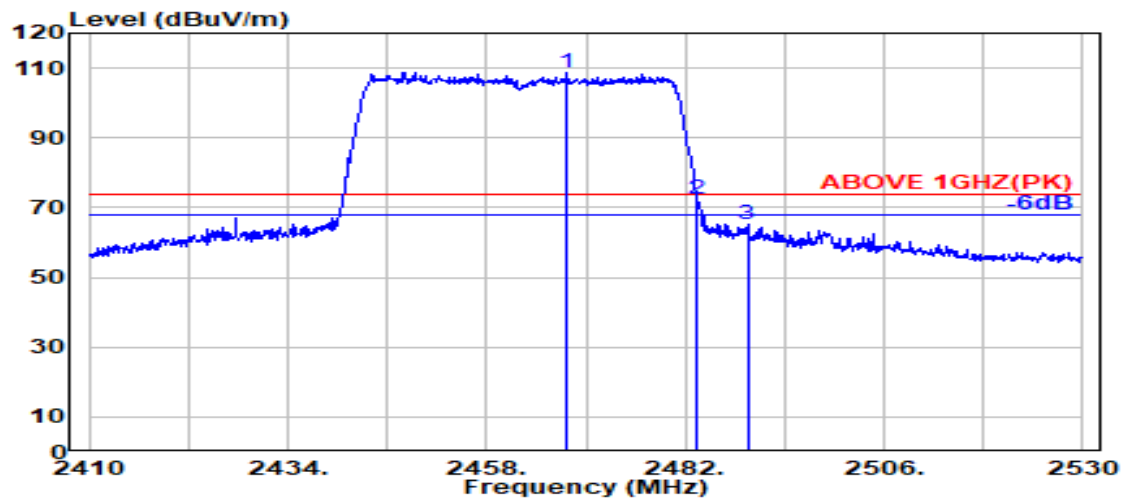

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.44	6.14	34.51	108.62	108.68	---	---	Peak
2483.500	28.47	6.17	34.52	72.38	72.50	74.00	1.50	Peak
2489.500	28.48	6.18	34.52	65.17	65.31	74.00	8.69	Peak

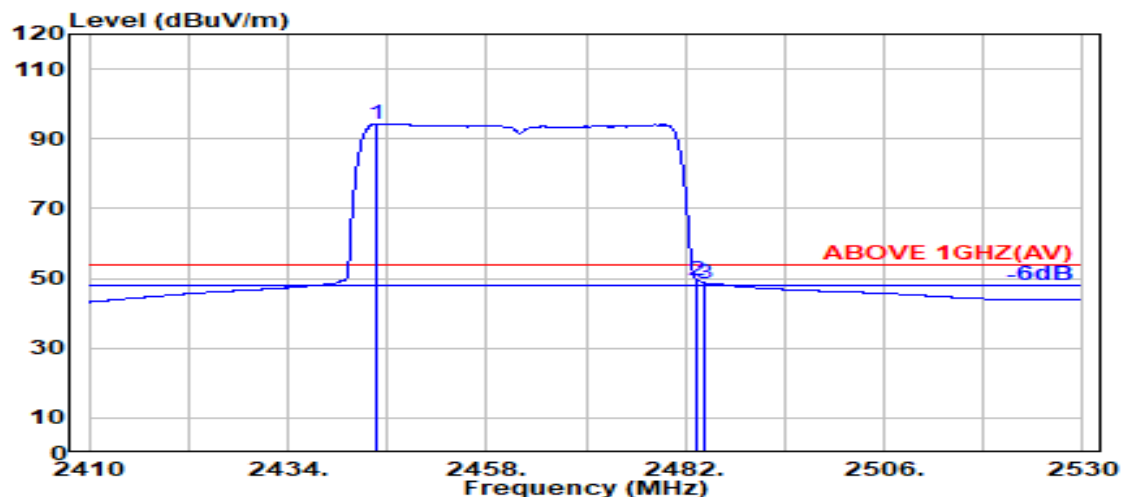

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.800	28.37	6.11	34.51	94.24	94.21	---	---	Average
2483.500	28.47	6.17	34.52	49.45	49.57	54.00	4.43	Average
2484.400	28.47	6.17	34.52	48.49	48.61	54.00	5.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

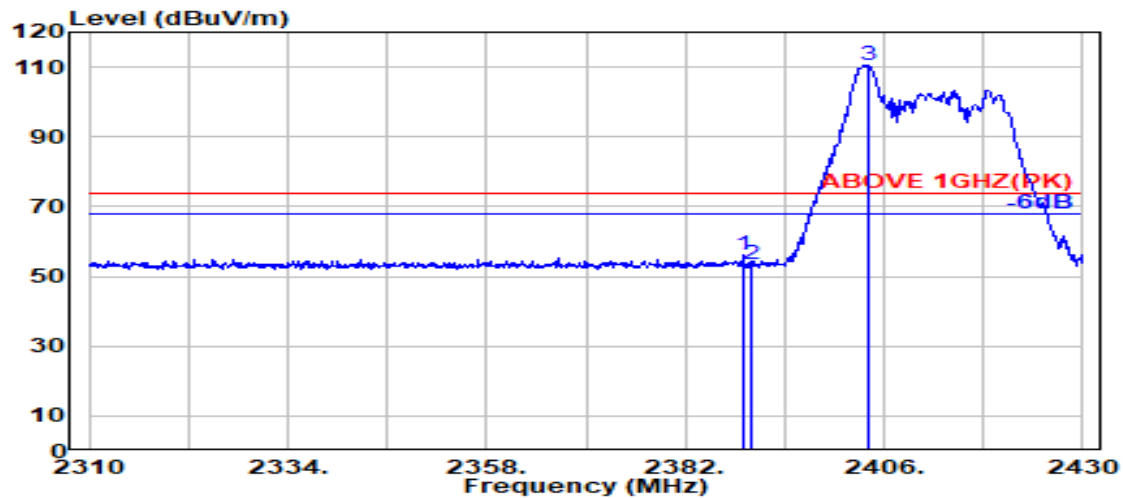

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.50	56.45	56.17	74.00	17.83	Peak
2390.000	28.18	6.03	34.50	53.52	53.24	74.00	20.76	Peak
@ 2404.100	28.12	6.06	34.50	110.80	110.48	---	---	Peak

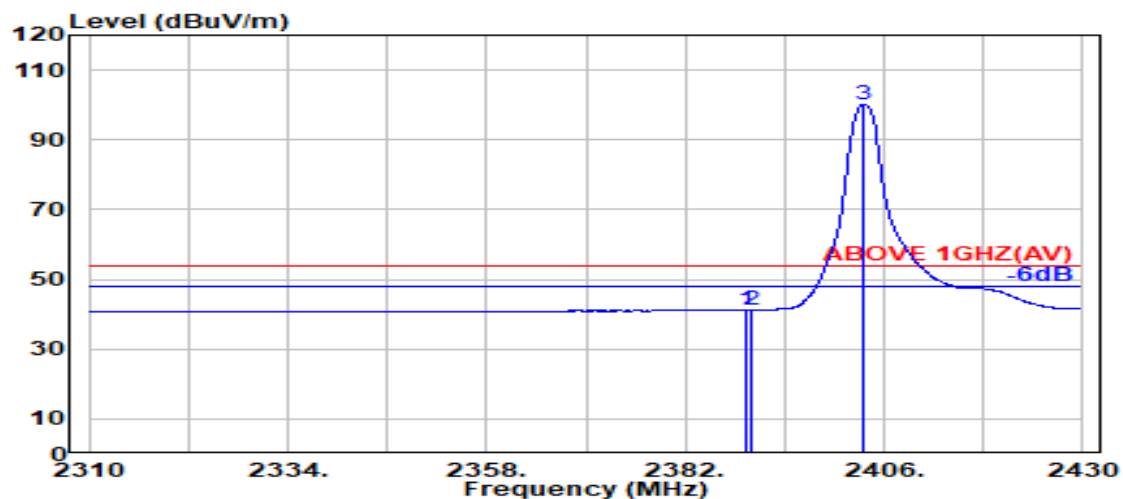

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.50	41.52	41.24	54.00	12.76	Average
2390.000	28.18	6.03	34.50	41.54	41.26	54.00	12.74	Average
@ 2403.600	28.12	6.05	34.50	100.42	100.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

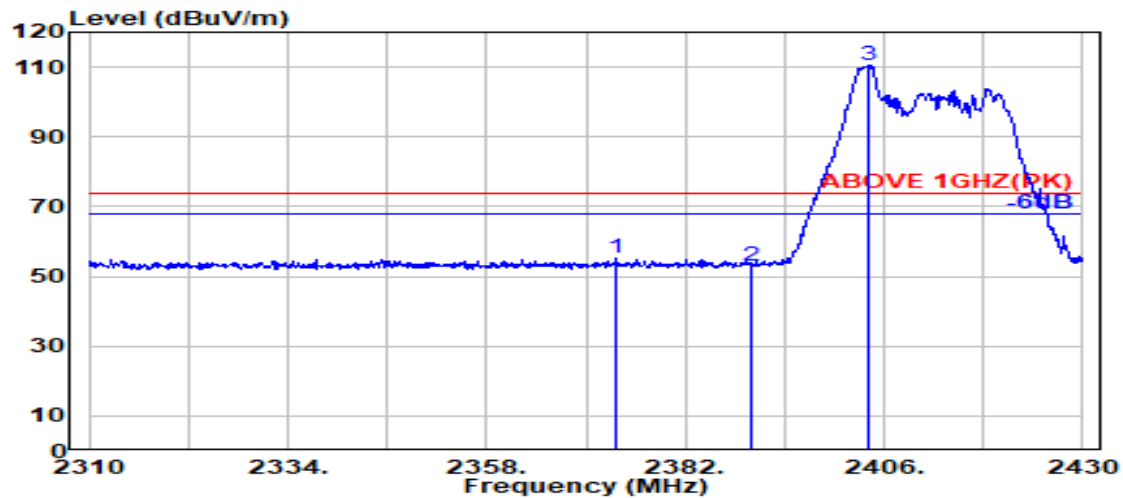

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.700	28.31	6.01	34.49	55.45	55.28	74.00	18.72	Peak
2390.000	28.18	6.03	34.50	53.13	52.84	74.00	21.16	Peak
@ 2404.200	28.13	6.06	34.50	110.88	110.56	---	---	Peak

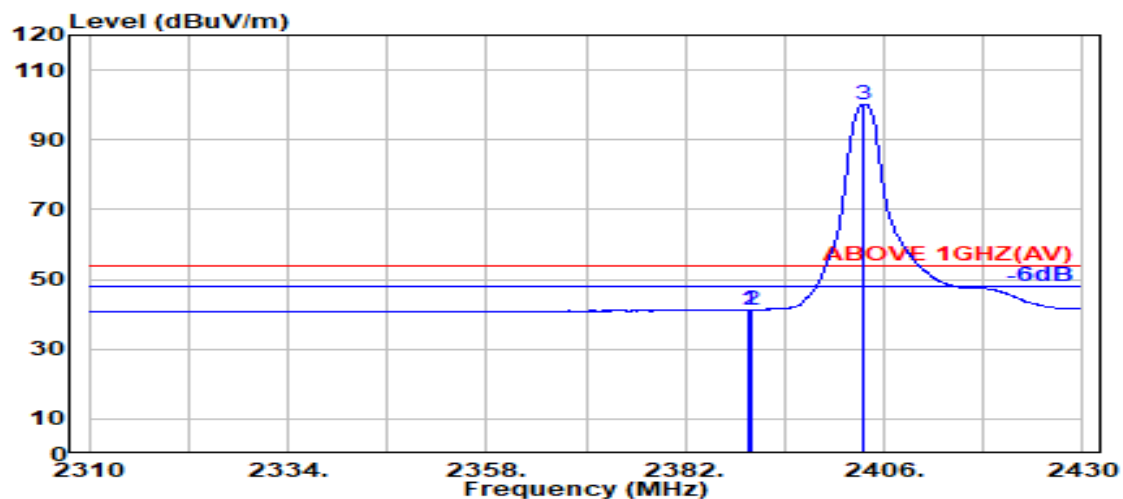

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.57	41.28	54.00	12.72	Average
2390.000	28.18	6.03	34.50	41.56	41.28	54.00	12.72	Average
@ 2403.600	28.12	6.05	34.50	100.55	100.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

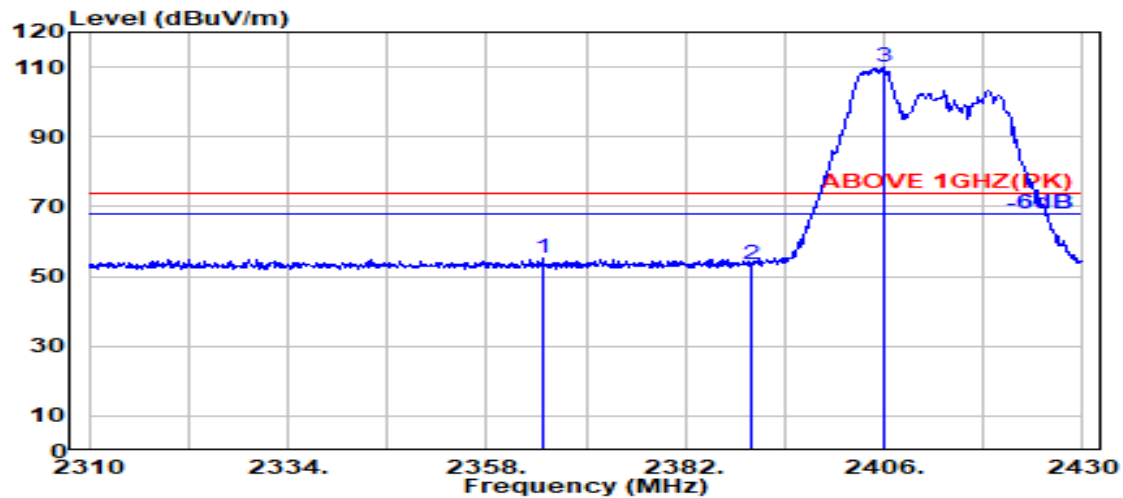

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2364.700	28.38	6.00	34.49	55.16	55.04	74.00	18.96	Peak
2390.000	28.18	6.03	34.50	53.91	53.63	74.00	20.37	Peak
@ 2405.900	28.14	6.06	34.50	110.32	110.02	---	---	Peak

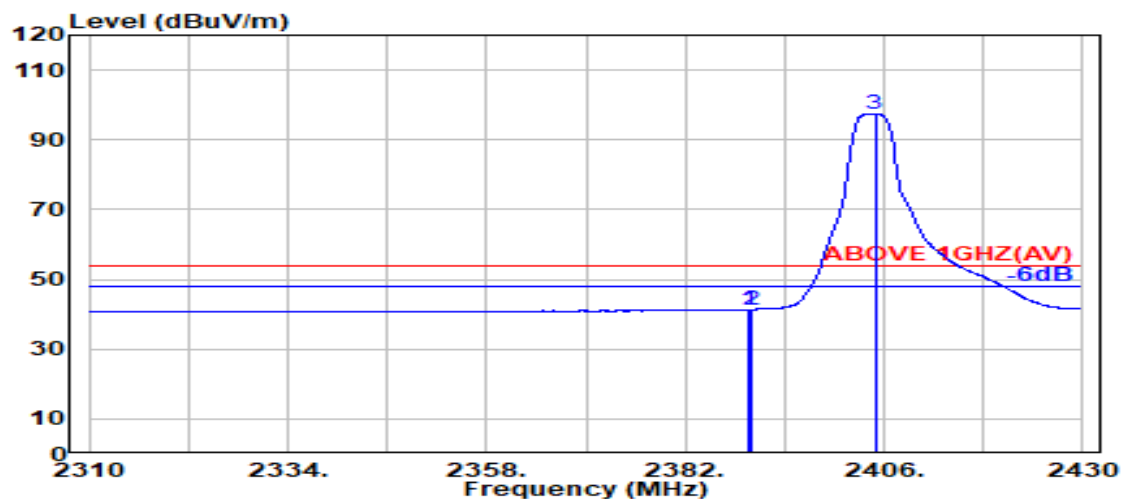

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.65	41.37	54.00	12.63	Average
2390.000	28.18	6.03	34.50	41.65	41.37	54.00	12.63	Average
@ 2404.900	28.13	6.06	34.50	97.87	97.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

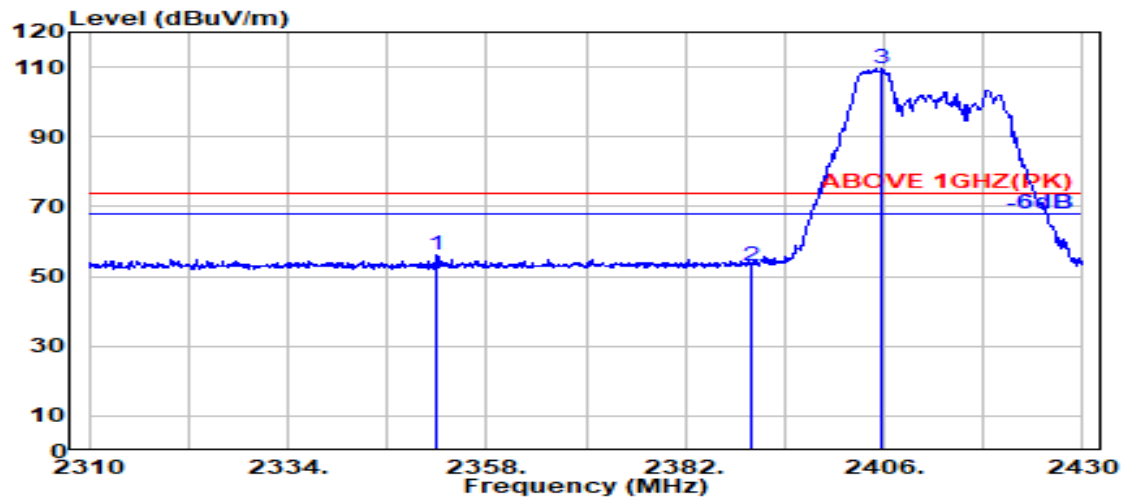

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2352.000	28.48	5.98	34.49	56.03	56.01	74.00	17.99	Peak
2390.000	28.18	6.03	34.50	53.49	53.21	74.00	20.79	Peak
@ 2405.700	28.13	6.06	34.50	109.71	109.40	---	---	Peak

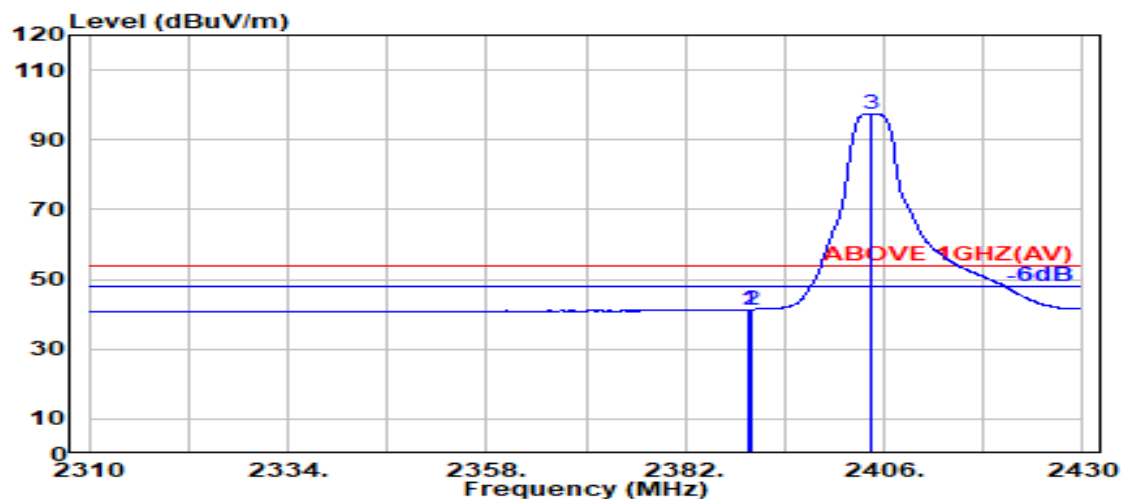

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.67	41.39	54.00	12.61	Average
2390.000	28.18	6.03	34.50	41.70	41.41	54.00	12.59	Average
@ 2404.300	28.13	6.06	34.50	97.84	97.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

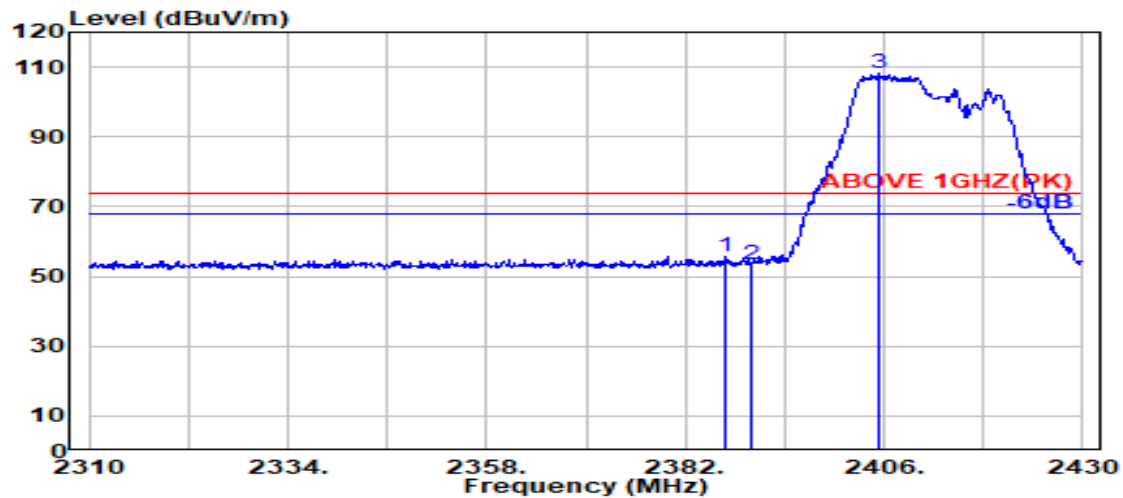

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.20	6.03	34.50	55.83	55.56	74.00	18.44	Peak
2390.000	28.18	6.03	34.50	53.91	53.62	74.00	20.38	Peak
@ 2405.500	28.13	6.06	34.50	108.32	108.01	---	---	Peak

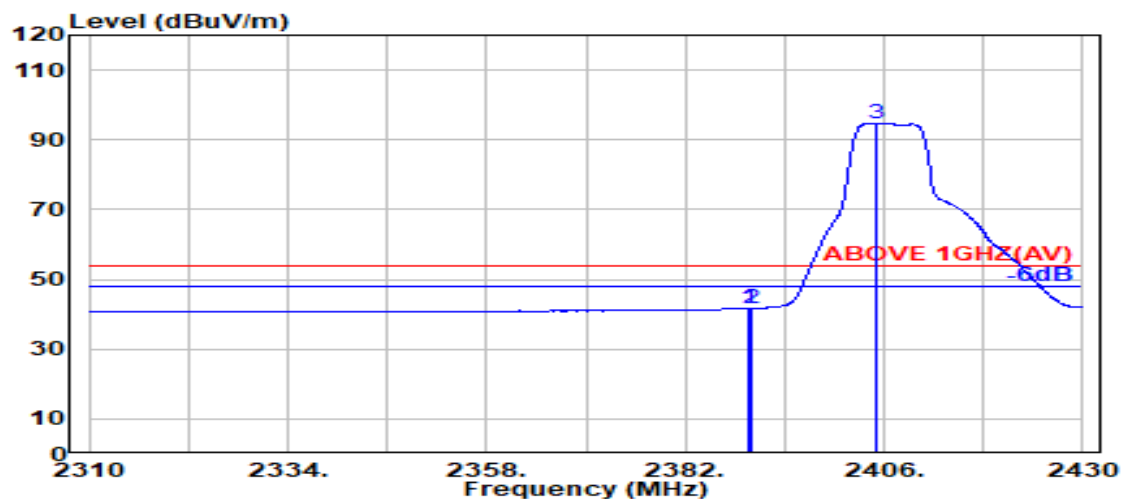

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.95	41.67	54.00	12.33	Average
2390.000	28.18	6.03	34.50	42.00	41.72	54.00	12.28	Average
@ 2405.000	28.13	6.06	34.50	95.14	94.83	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

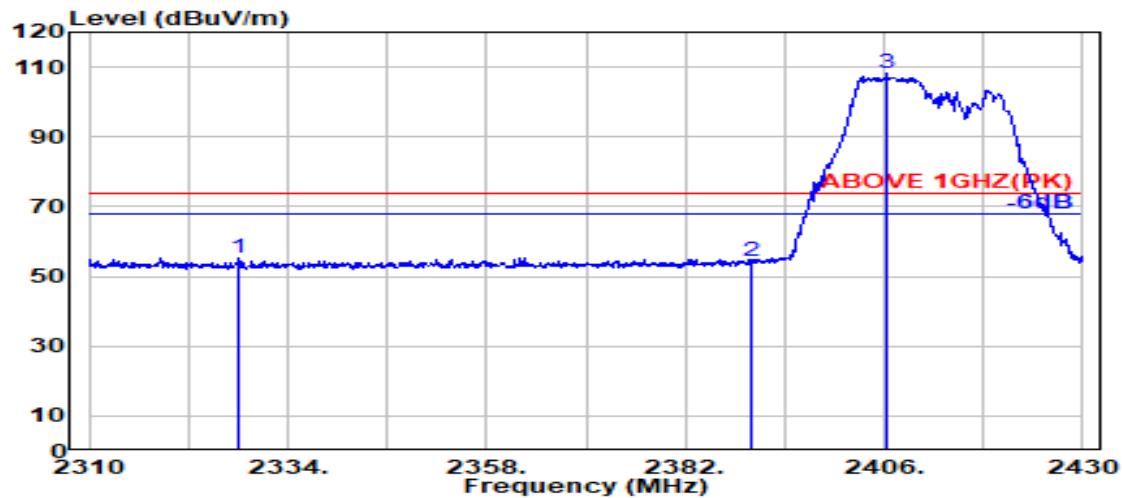

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2328.000	28.33	5.94	34.48	55.47	55.25	74.00	18.75	Peak
2390.000	28.18	6.03	34.50	54.53	54.25	74.00	19.75	Peak
@ 2406.300	28.14	6.06	34.50	108.51	108.20	---	---	Peak

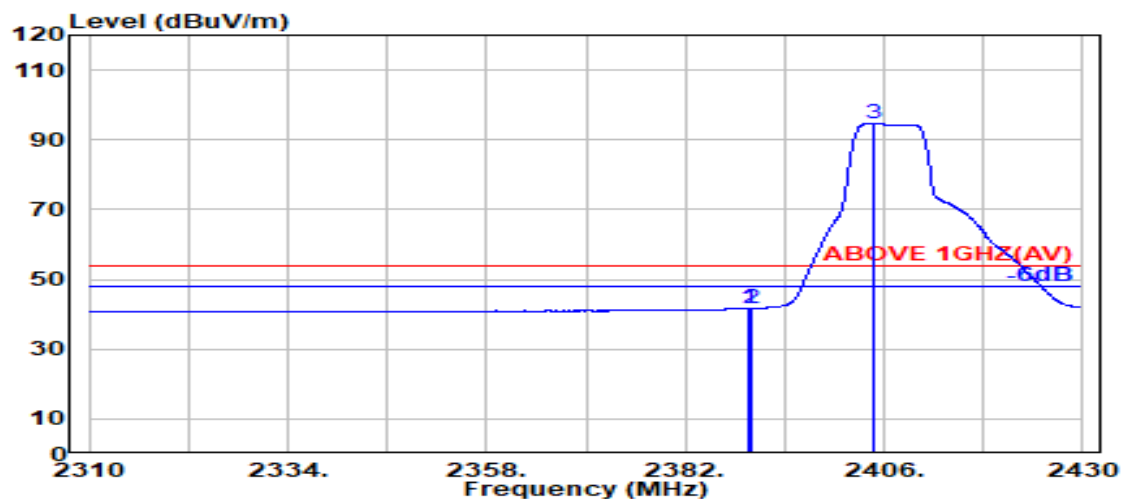

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.94	41.66	54.00	12.34	Average
2390.000	28.18	6.03	34.50	42.04	41.76	54.00	12.24	Average
@ 2404.600	28.13	6.06	34.50	94.93	94.61	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

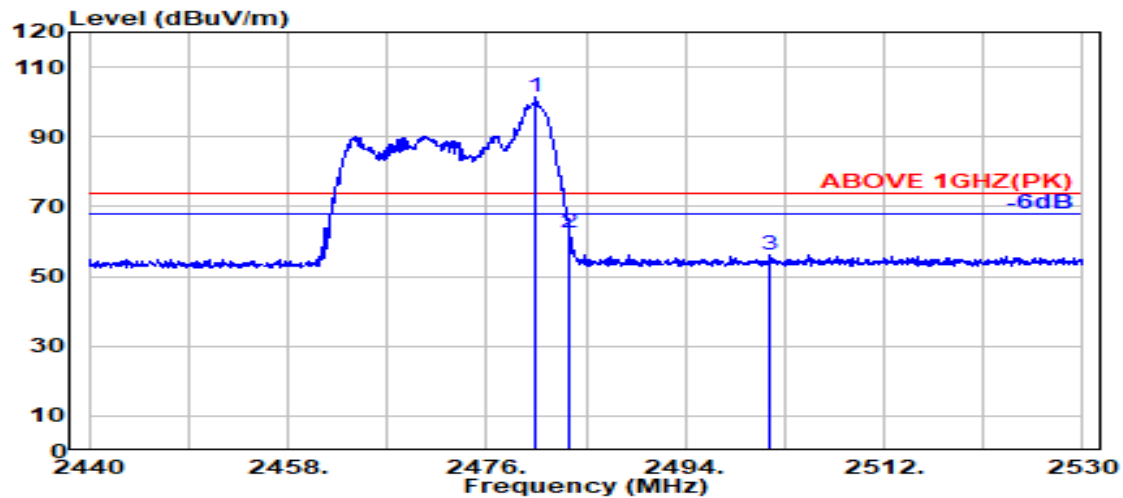

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	34.52	101.42	101.53	---	---	Peak
2483.500	28.47	6.17	34.52	62.47	62.58	74.00	11.42	Peak
2501.600	28.51	6.19	34.52	56.05	56.23	74.00	17.77	Peak

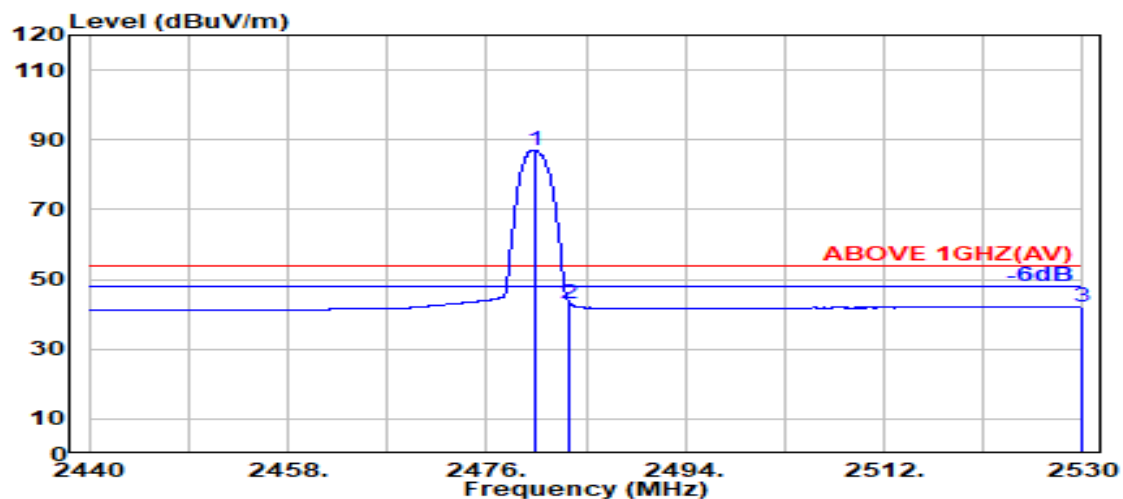

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	6.16	34.52	86.99	87.10	---	---	Average
2483.500	28.47	6.17	34.52	43.11	43.22	54.00	10.78	Average
2529.850	28.68	6.23	34.53	41.74	42.12	54.00	11.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

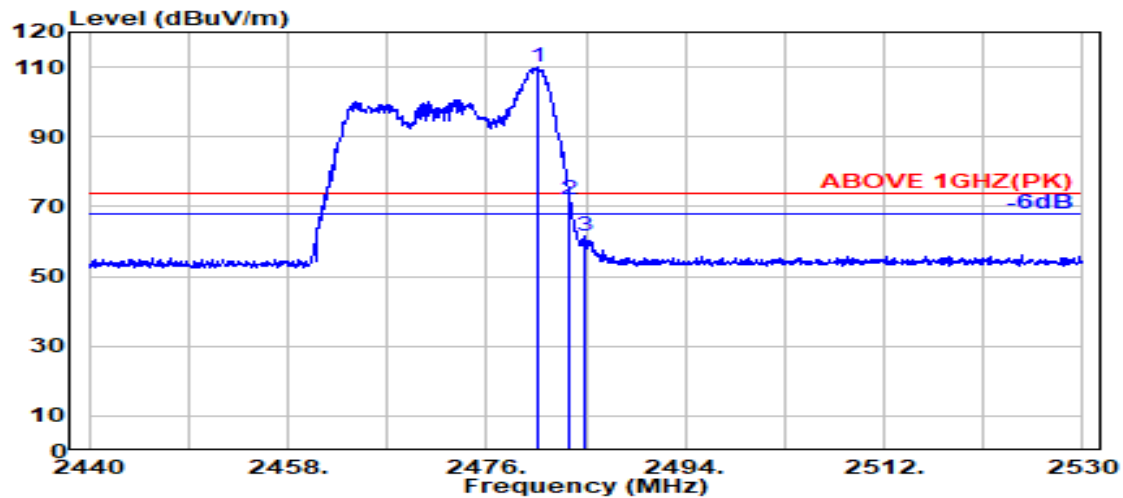

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.700	28.46	6.16	34.52	110.03	110.14	---	---	Peak
2483.500	28.47	6.17	34.52	71.71	71.83	74.00	2.17	Peak
2484.900	28.47	6.17	34.52	61.45	61.57	74.00	12.43	Peak

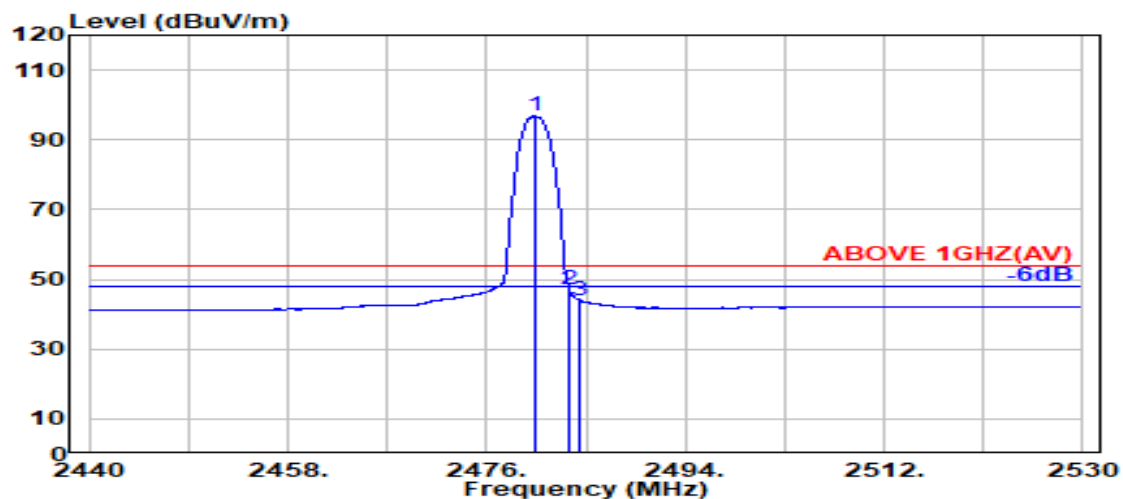

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	6.16	34.52	96.67	96.77	---	---	Average
2483.500	28.47	6.17	34.52	46.82	46.93	54.00	7.07	Average
2484.500	28.47	6.17	34.52	43.82	43.95	54.00	10.05	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

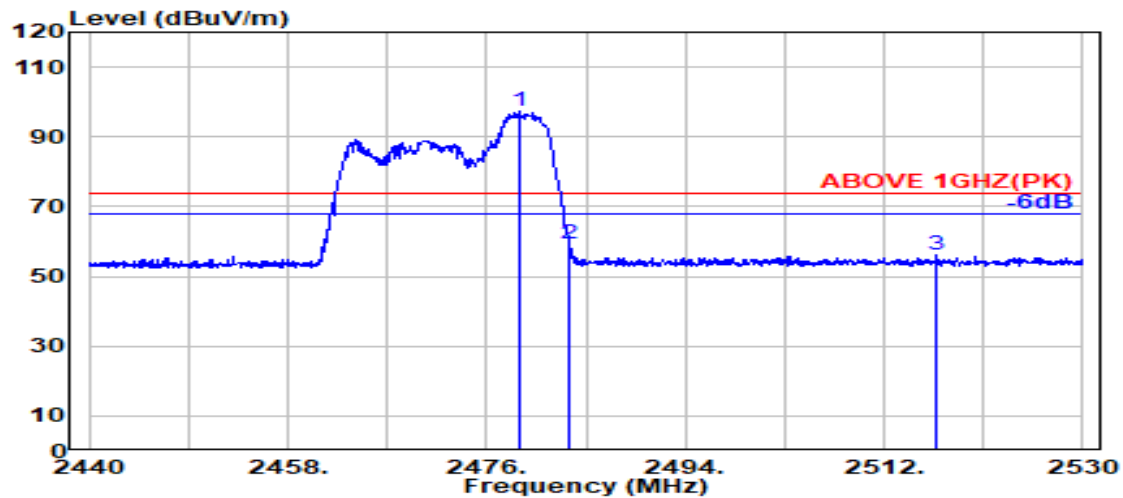

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.46	6.16	34.52	97.06	97.16	---	---	Peak
2483.500	28.47	6.17	34.52	59.11	59.23	74.00	14.77	Peak
2516.700	28.60	6.21	34.52	55.73	56.02	74.00	17.98	Peak

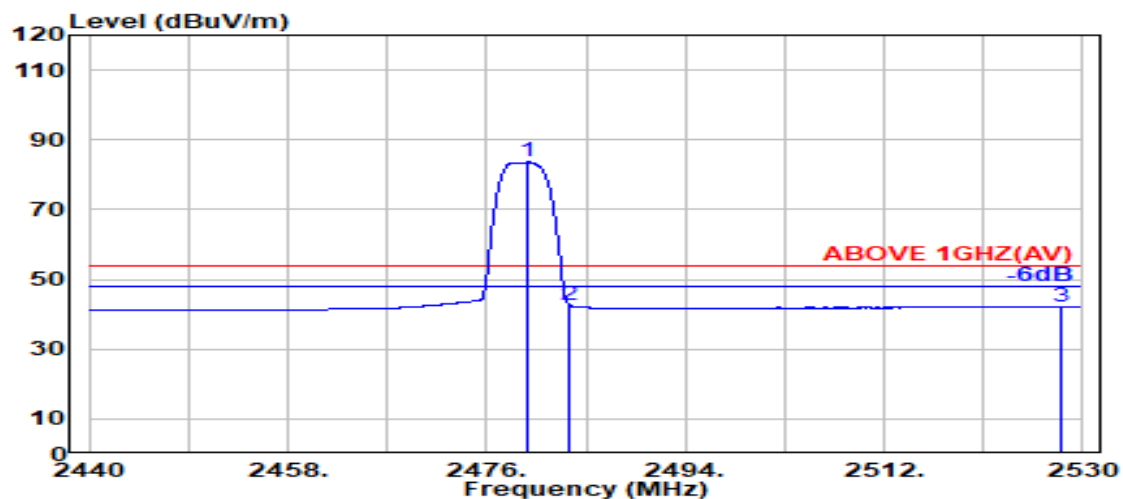

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.46	6.16	34.52	83.44	83.55	---	---	Average
2483.500	28.47	6.17	34.52	42.61	42.73	54.00	11.27	Average
2527.950	28.67	6.22	34.53	41.74	42.10	54.00	11.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

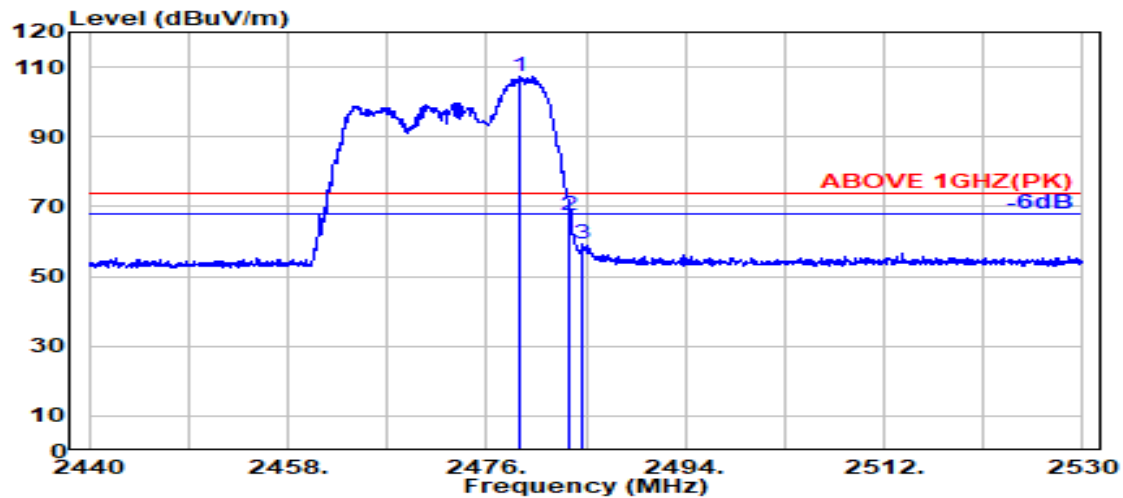

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.46	6.16	34.52	107.15	107.25	---	---	Peak
2483.500	28.47	6.17	34.52	67.37	67.49	74.00	6.51	Peak
2484.750	28.47	6.17	34.52	59.35	59.48	74.00	14.52	Peak

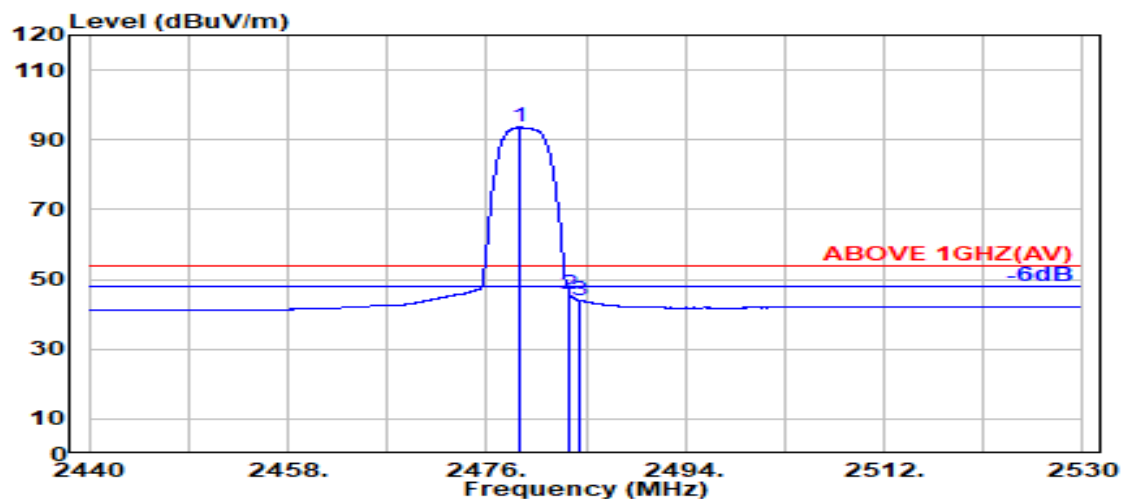

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.46	6.16	34.52	93.45	93.55	---	---	Average
2483.500	28.47	6.17	34.52	45.73	45.85	54.00	8.15	Average
2484.500	28.47	6.17	34.52	43.81	43.93	54.00	10.07	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

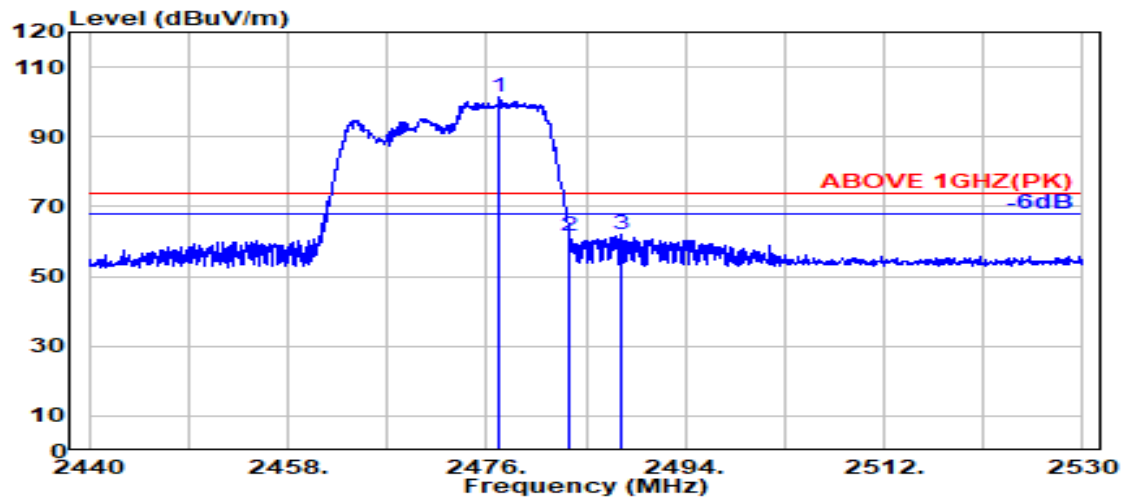

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.200	28.45	6.16	34.52	101.17	101.26	---	---	Peak
2483.500	28.47	6.17	34.52	61.31	61.43	74.00	12.57	Peak
2488.100	28.48	6.17	34.52	61.69	61.82	74.00	12.18	Peak

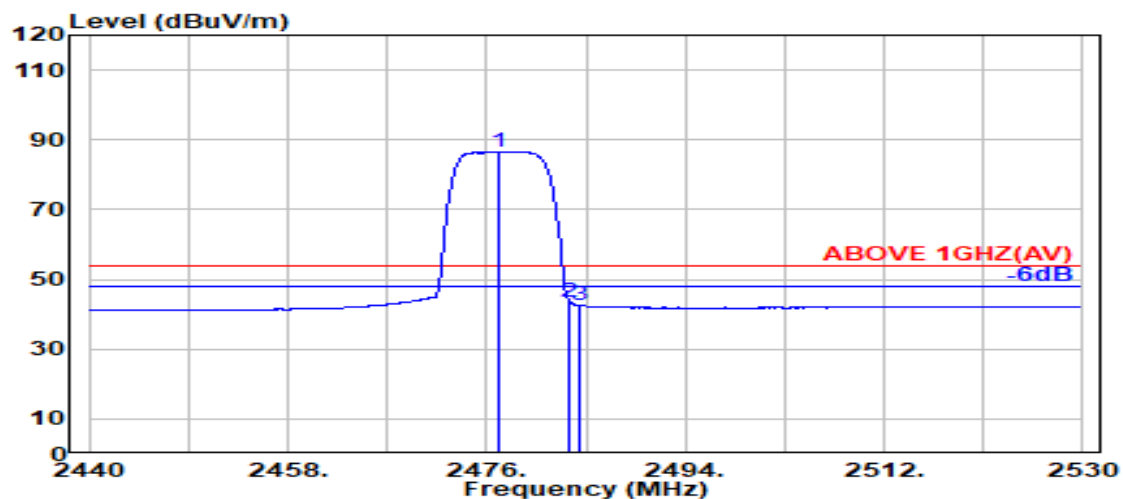

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.150	28.45	6.16	34.52	86.37	86.47	---	---	Average
2483.500	28.47	6.17	34.52	43.58	43.70	54.00	10.30	Average
2484.500	28.47	6.17	34.52	42.33	42.45	54.00	11.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

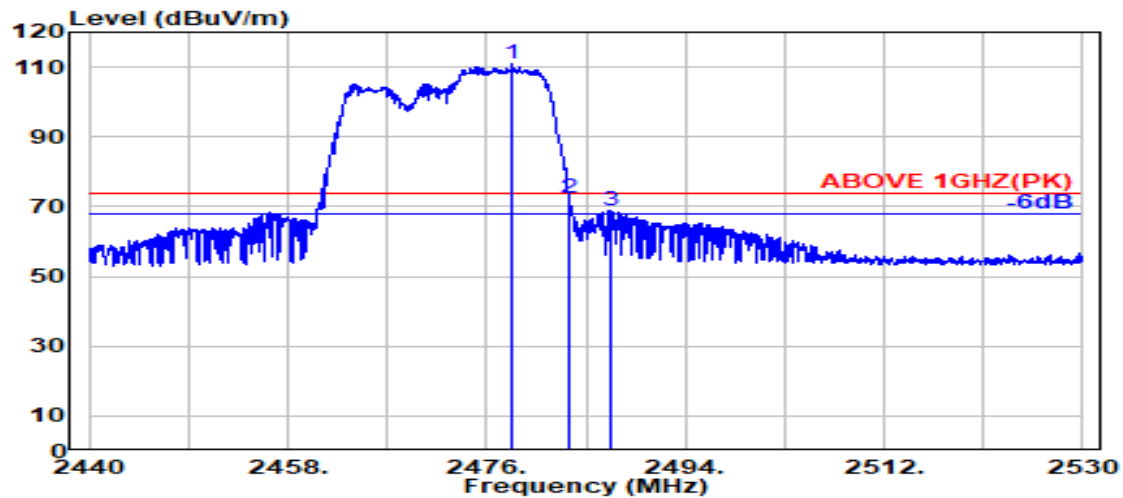

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2478.350	28.46	6.16	34.52	110.66	110.76	---	---	Peak
	2483.500	28.47	6.17	34.52	72.31	72.43	74.00	1.57	Peak
	2487.300	28.47	6.17	34.52	68.62	68.75	74.00	5.25	Peak

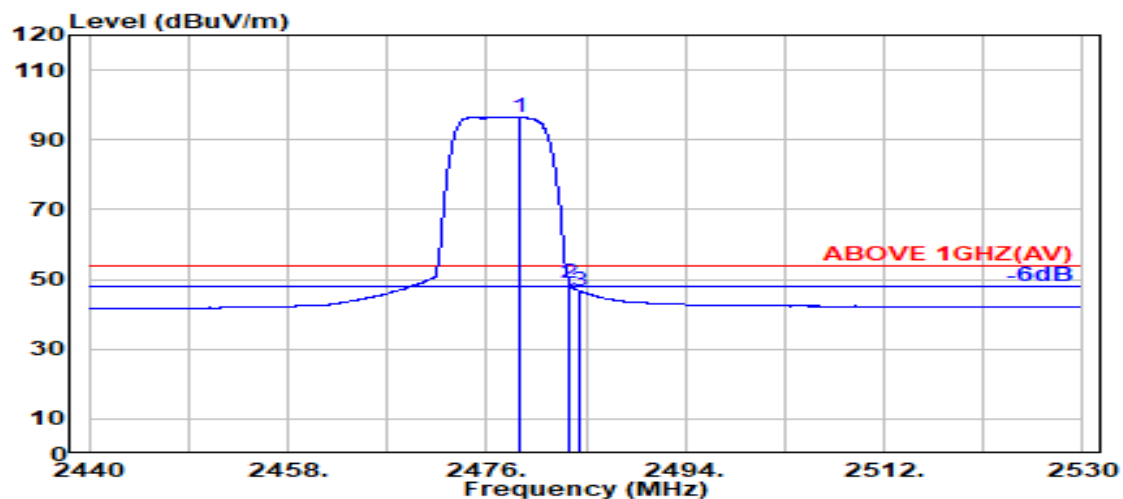

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2478.950	28.46	6.16	34.52	96.37	96.48	---	---	Average
	2483.500	28.47	6.17	34.52	49.00	49.11	54.00	4.89	Average
	2484.500	28.47	6.17	34.52	46.49	46.61	54.00	7.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

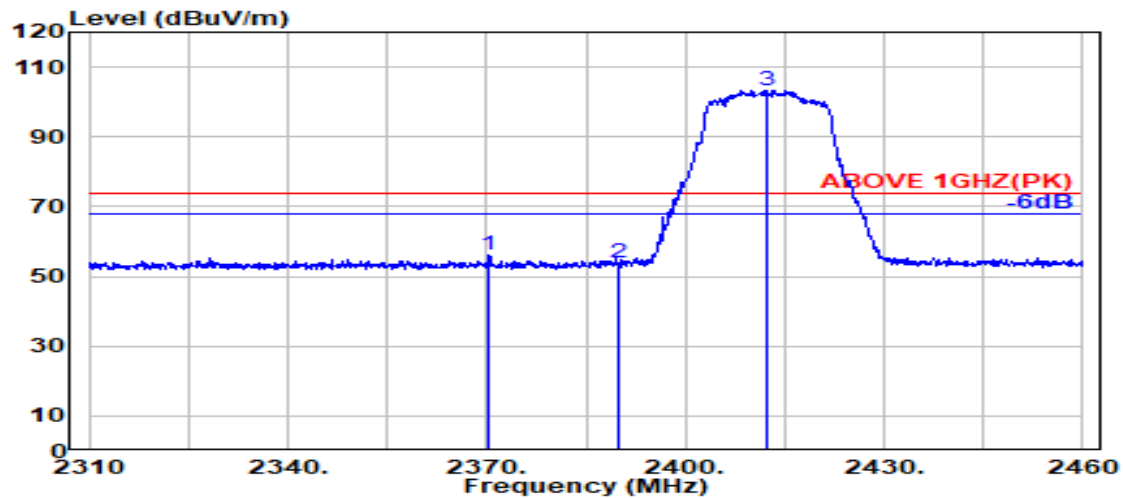

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.400	28.34	6.01	34.49	56.28	56.13	74.00	17.87	Peak
2390.000	28.18	6.03	34.50	53.96	53.67	74.00	20.33	Peak
@ 2412.400	28.17	6.07	34.50	103.66	103.40	---	---	Peak

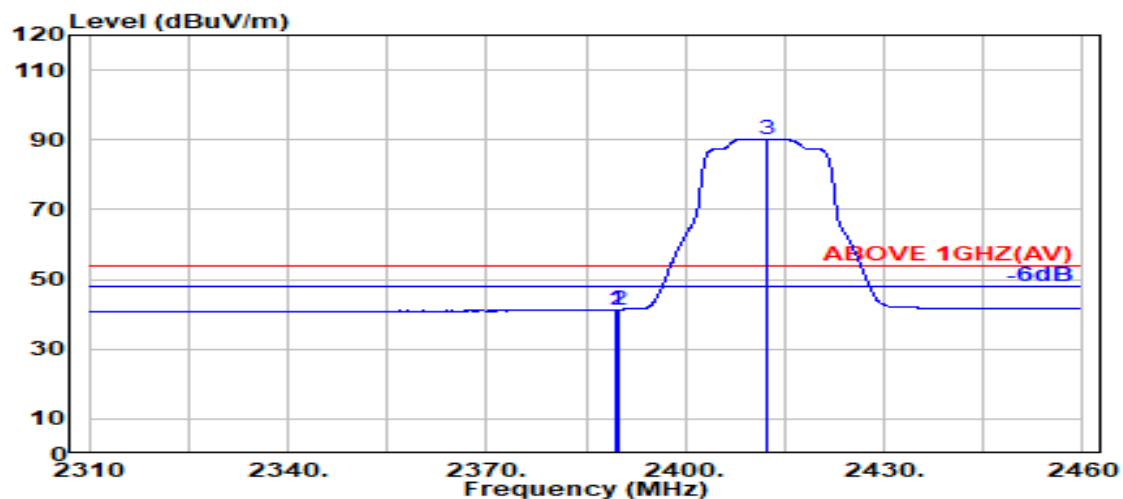

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.67	41.39	54.00	12.61	Average
2390.000	28.18	6.03	34.50	41.67	41.39	54.00	12.61	Average
@ 2412.500	28.18	6.07	34.50	90.56	90.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

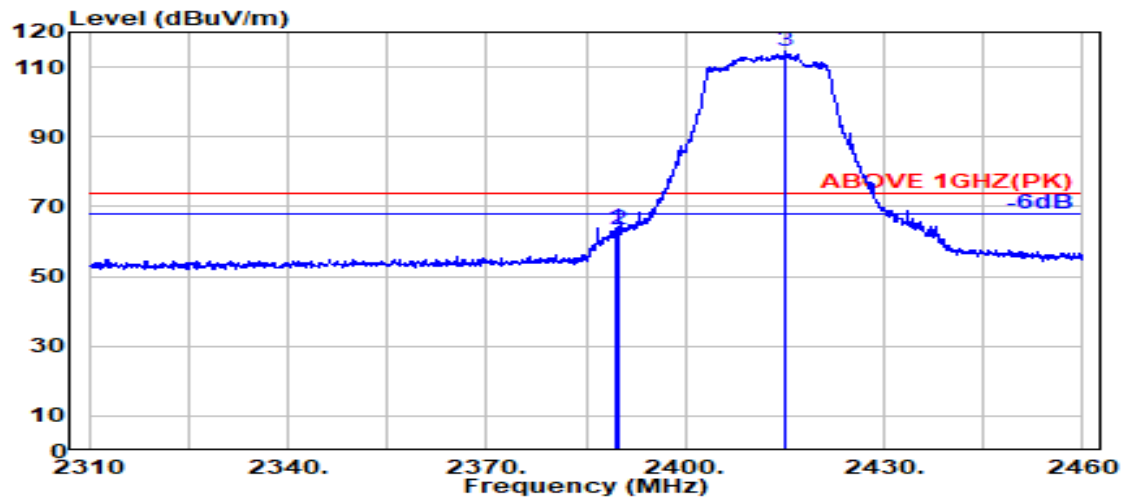

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	64.31	64.03	74.00	9.97	Peak
2390.000	28.18	6.03	34.50	63.72	63.44	74.00	10.56	Peak
@ 2414.900	28.19	6.07	34.50	114.59	114.34	---	---	Peak

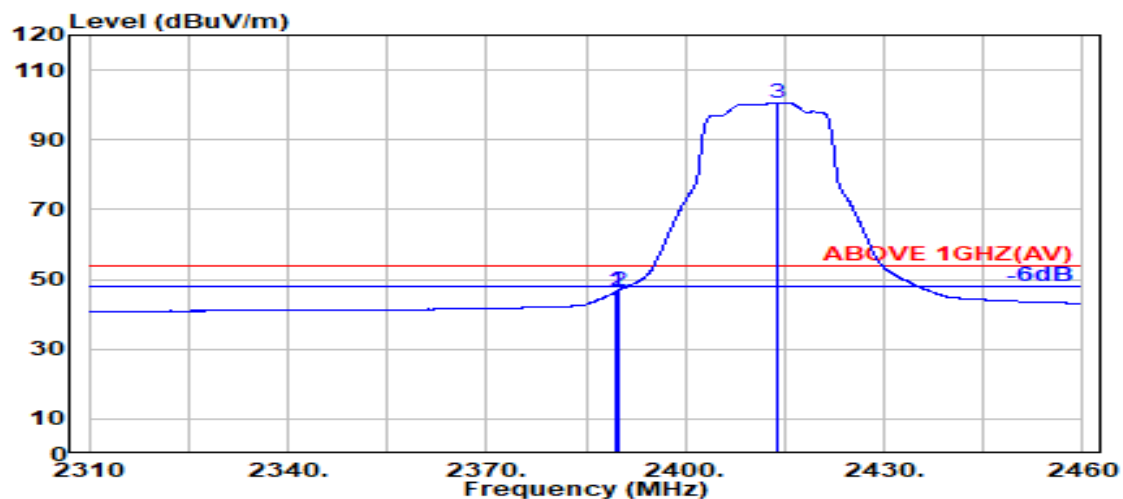

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	46.79	46.51	54.00	7.49	Average
2390.000	28.18	6.03	34.50	47.15	46.86	54.00	7.14	Average
@ 2413.900	28.18	6.07	34.50	100.85	100.60	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

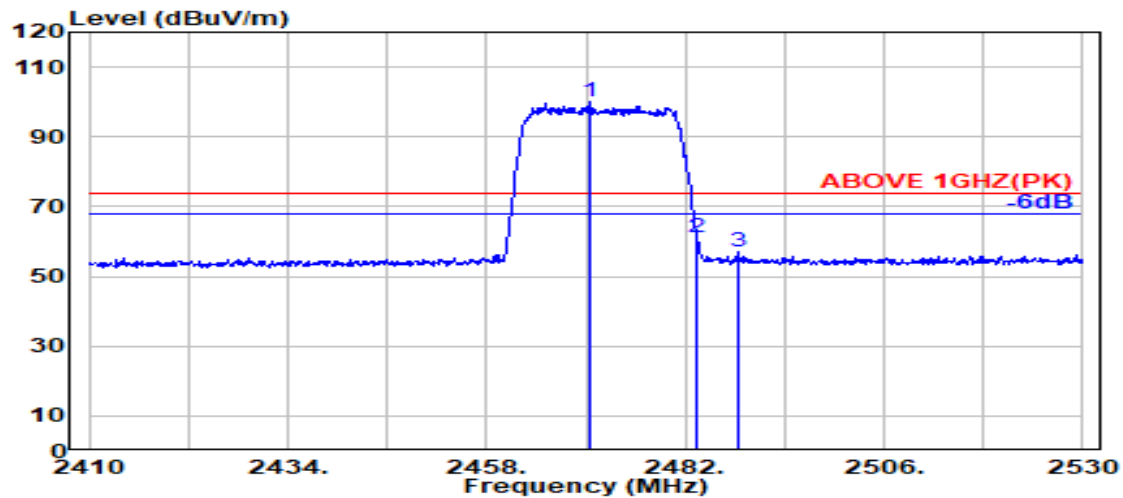

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.400	28.44	6.15	34.51	99.91	99.99	---	---	Peak
	2483.500	28.47	6.17	34.52	61.19	61.31	74.00	12.69	Peak
	2488.400	28.48	6.17	34.52	56.75	56.88	74.00	17.12	Peak

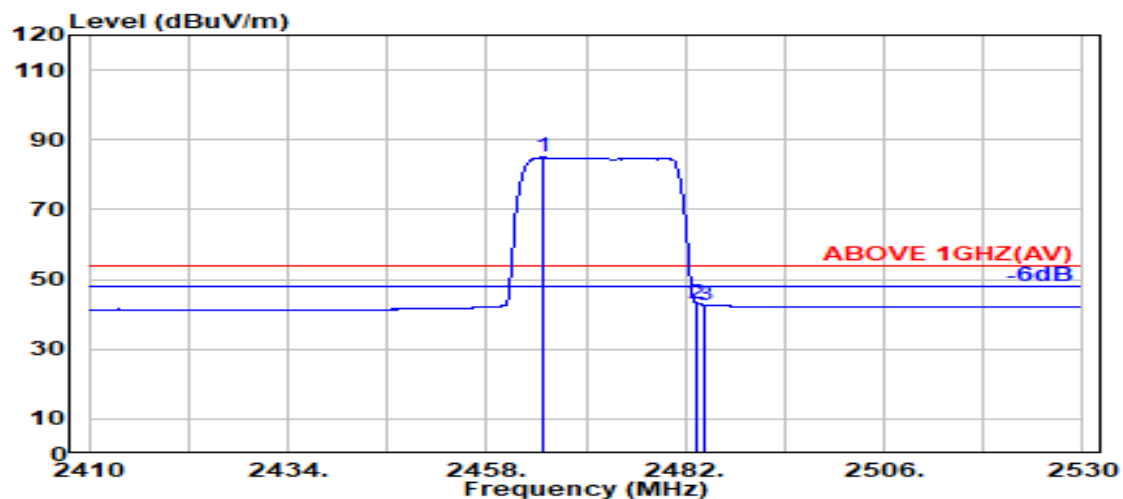

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.700	28.43	6.14	34.51	84.91	84.97	---	---	Average
	2483.500	28.47	6.17	34.52	42.99	43.11	54.00	10.89	Average
	2484.400	28.47	6.17	34.52	42.50	42.62	54.00	11.38	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

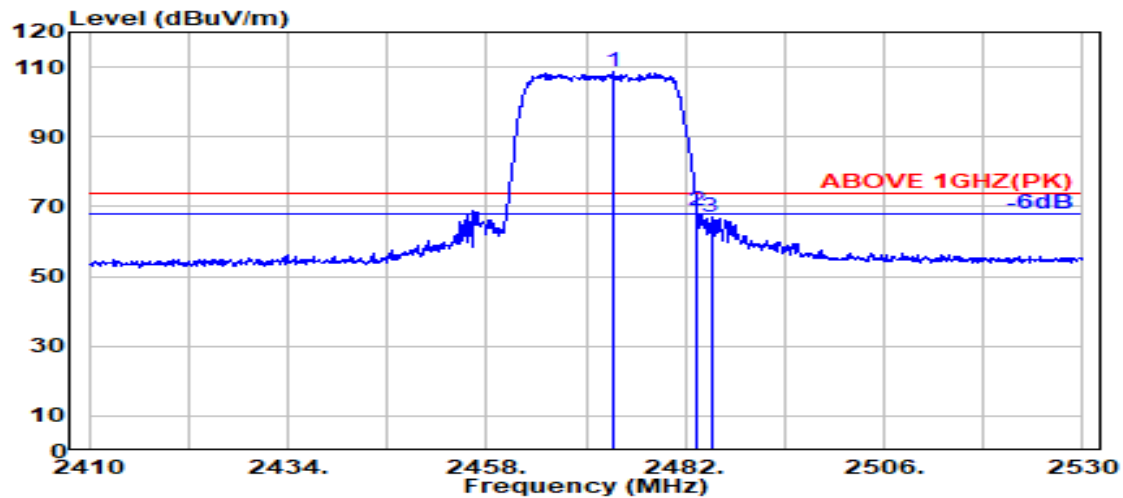

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2473.200	28.45	6.15	34.51	108.81	108.89	---	---	Peak
	2483.500	28.47	6.17	34.52	68.83	68.95	74.00	5.05	Peak
	2485.100	28.47	6.17	34.52	66.76	66.89	74.00	7.11	Peak

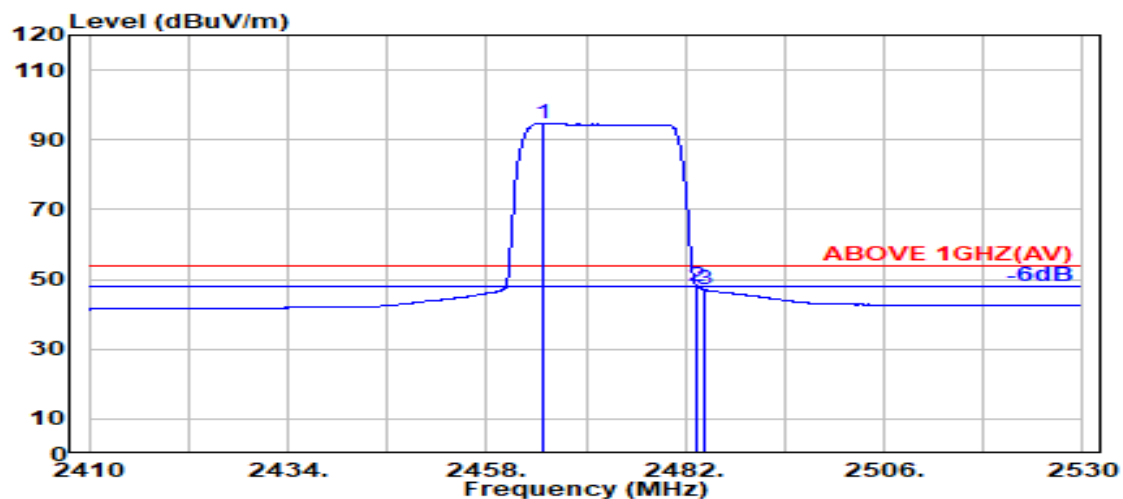

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2464.800	28.43	6.14	34.51	94.63	94.69	---	---	Average
	2483.500	28.47	6.17	34.52	47.94	48.06	54.00	5.94	Average
	2484.400	28.47	6.17	34.52	46.90	47.02	54.00	6.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

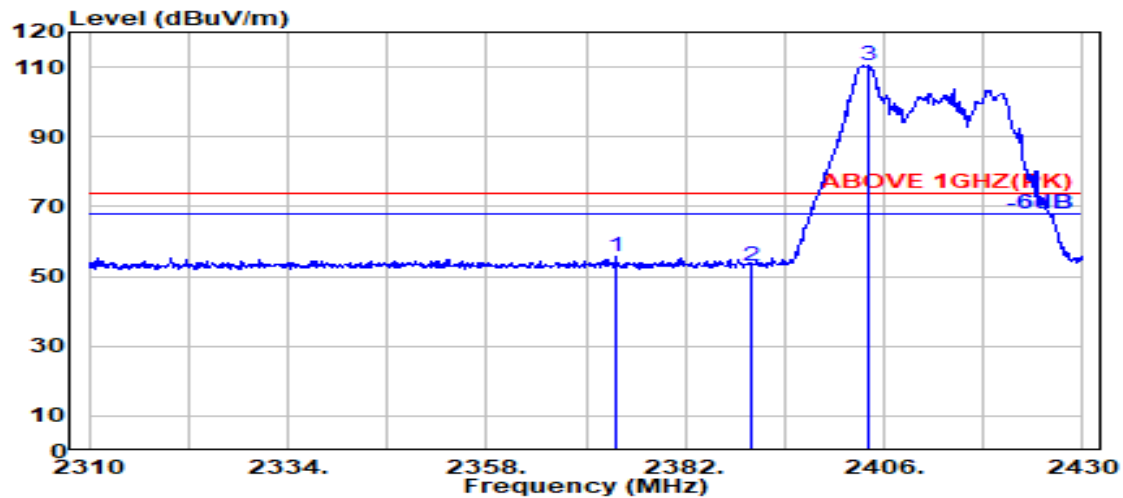

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.600	28.31	6.01	34.49	55.68	55.51	74.00	18.49	Peak
2390.000	28.18	6.03	34.50	53.14	52.85	74.00	21.15	Peak
@ 2404.100	28.12	6.06	34.50	110.69	110.37	---	---	Peak

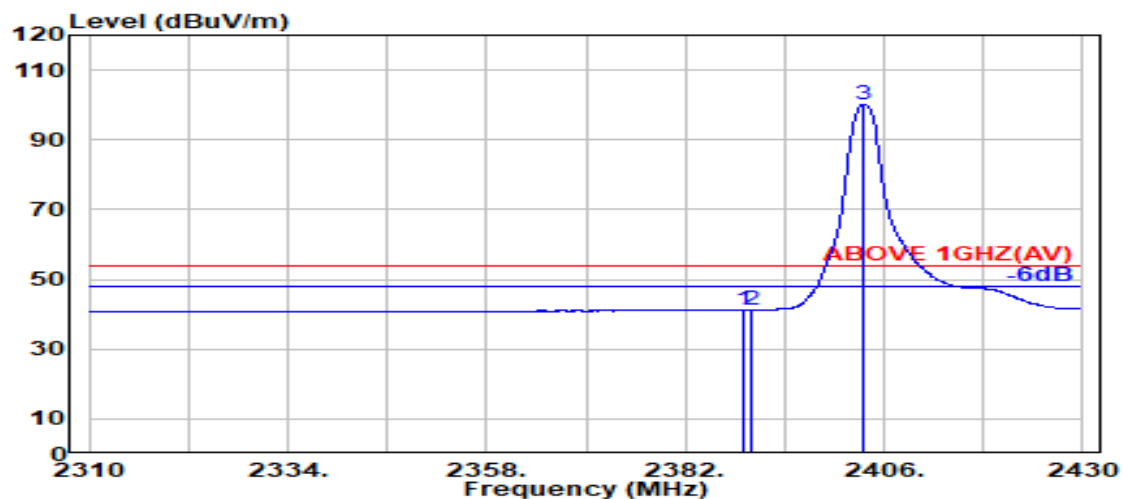

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.50	41.55	41.27	54.00	12.73	Average
2390.000	28.18	6.03	34.50	41.54	41.26	54.00	12.74	Average
@ 2403.500	28.12	6.05	34.50	100.44	100.12	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

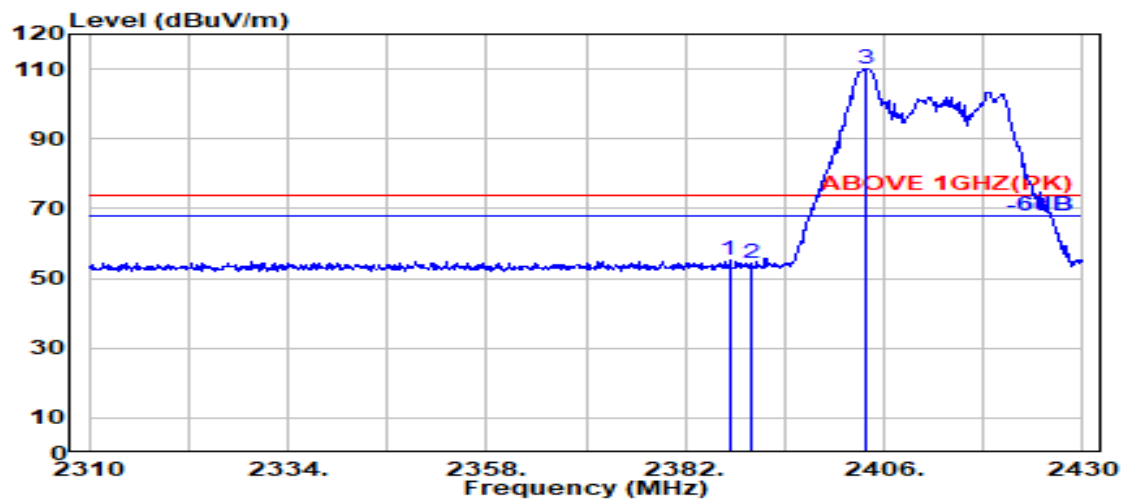

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.300	28.20	6.03	34.50	55.44	55.17	74.00	18.83	Peak
2390.000	28.18	6.03	34.50	54.55	54.26	74.00	19.74	Peak
@ 2403.900	28.12	6.05	34.50	110.53	110.21	---	---	Peak

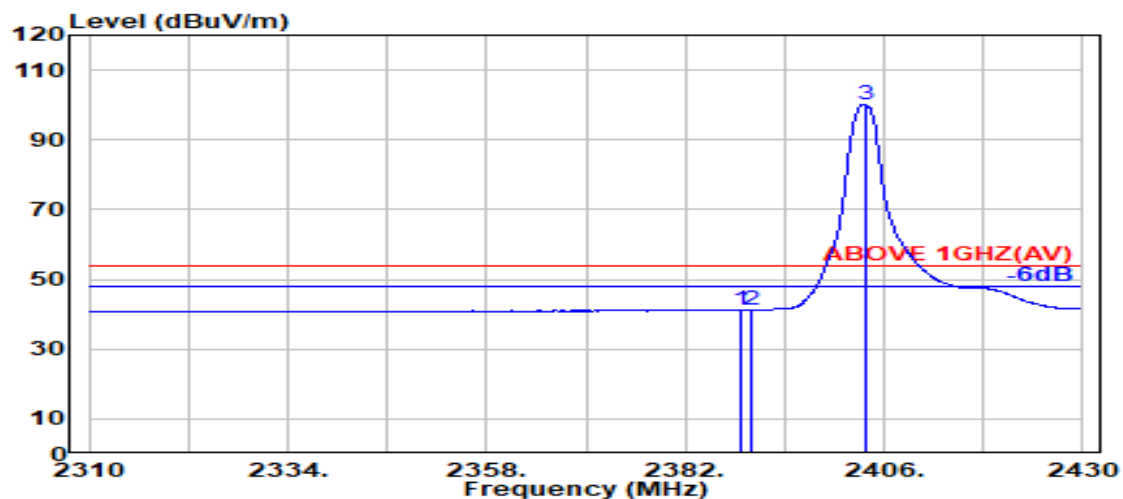

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.19	6.03	34.50	41.53	41.25	54.00	12.75	Average
2390.000	28.18	6.03	34.50	41.58	41.29	54.00	12.71	Average
@ 2403.700	28.12	6.05	34.50	100.48	100.15	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

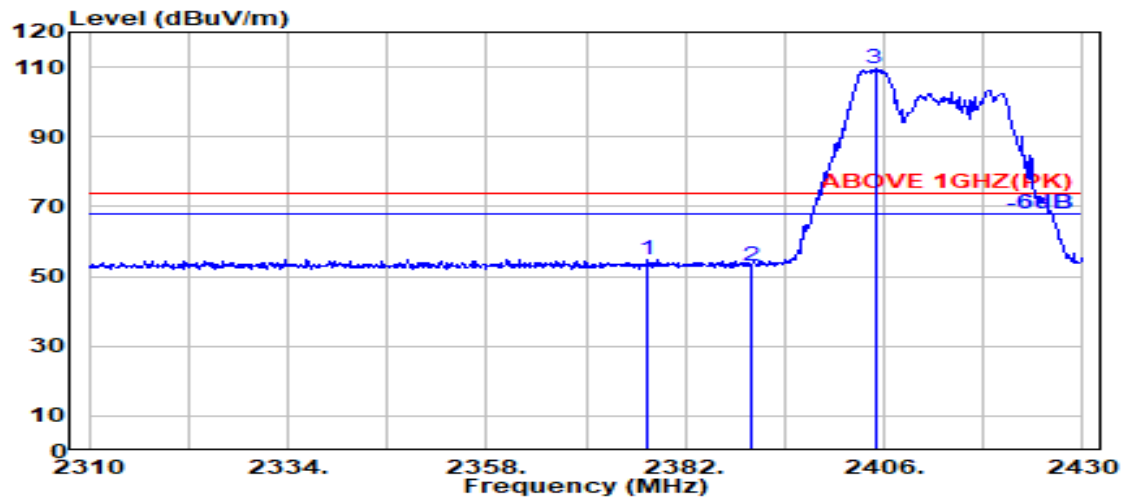

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2377.500	28.28	6.02	34.50	55.01	54.81	74.00	19.19	Peak
2390.000	28.18	6.03	34.50	53.04	52.76	74.00	21.24	Peak
@ 2404.900	28.13	6.06	34.50	109.88	109.56	---	---	Peak

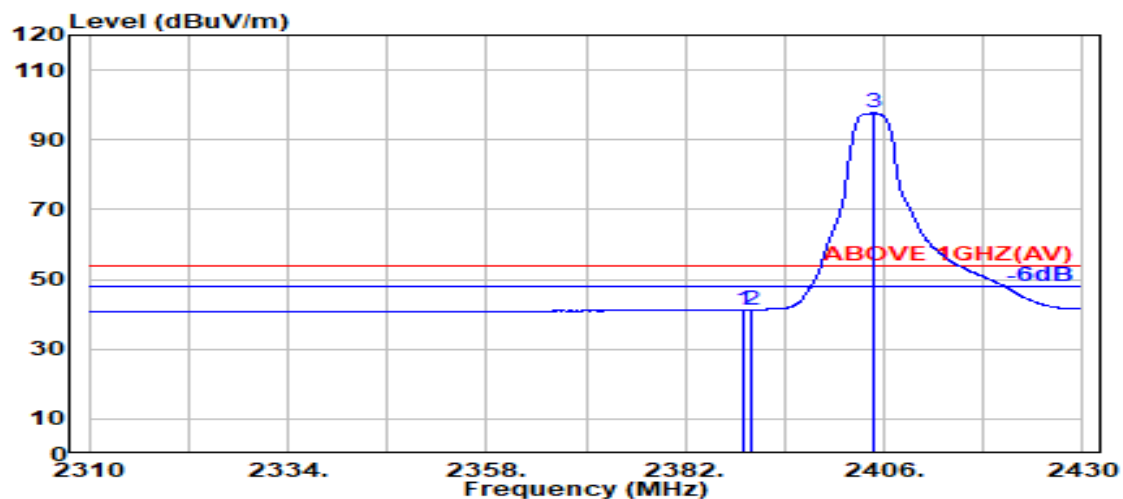

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.50	41.60	41.32	54.00	12.68	Average
2390.000	28.18	6.03	34.50	41.63	41.34	54.00	12.66	Average
@ 2404.800	28.13	6.06	34.50	98.02	97.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

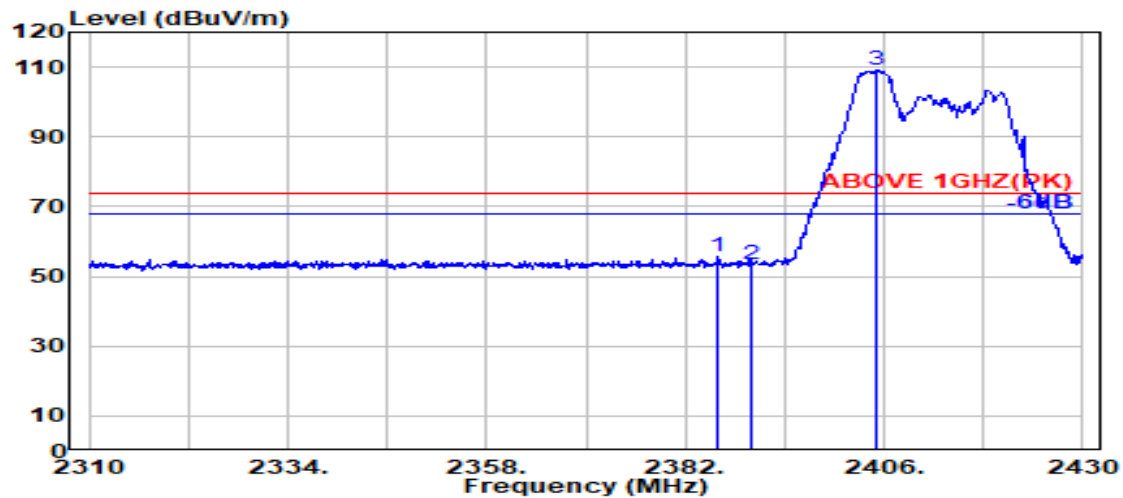

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.000	28.21	6.03	34.50	55.85	55.59	74.00	18.41	Peak
2390.000	28.18	6.03	34.50	53.63	53.35	74.00	20.65	Peak
@ 2405.100	28.13	6.06	34.50	109.52	109.21	---	---	Peak

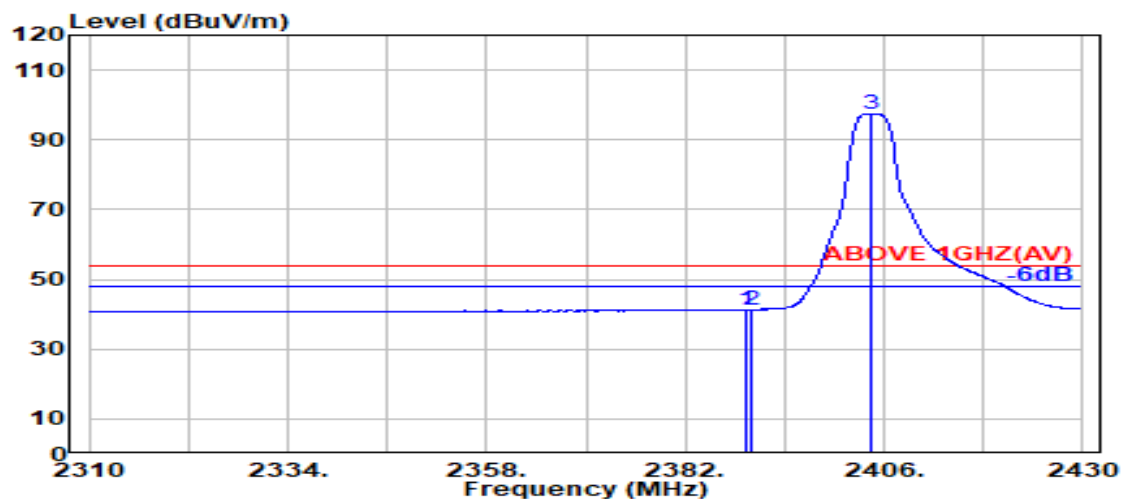

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	41.63	41.35	54.00	12.65	Average
2390.000	28.18	6.03	34.50	41.62	41.34	54.00	12.66	Average
@ 2404.500	28.13	6.06	34.50	97.85	97.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

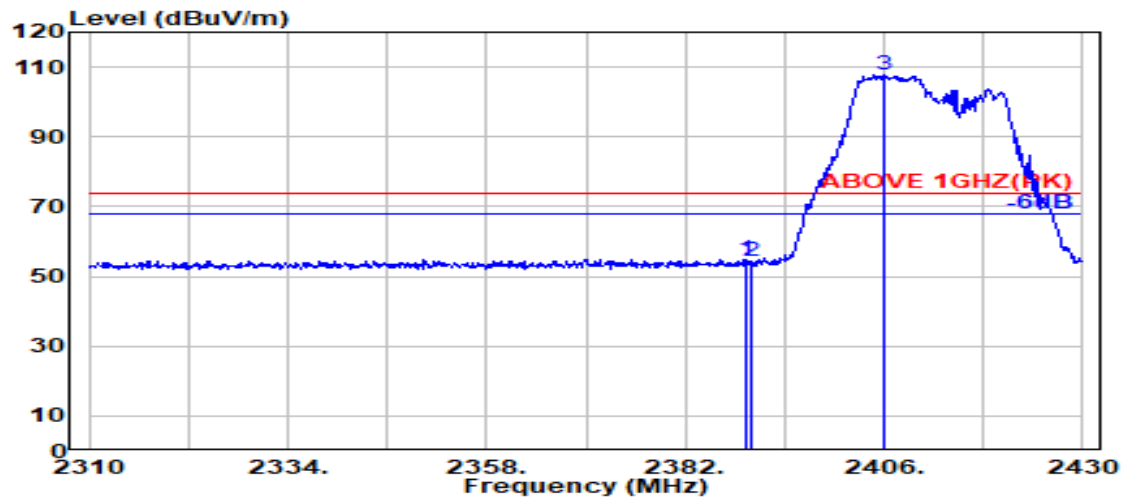

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	55.10	54.82	74.00	19.18	Peak
2390.000	28.18	6.03	34.50	54.67	54.39	74.00	19.61	Peak
@ 2406.100	28.14	6.06	34.50	108.17	107.86	---	---	Peak

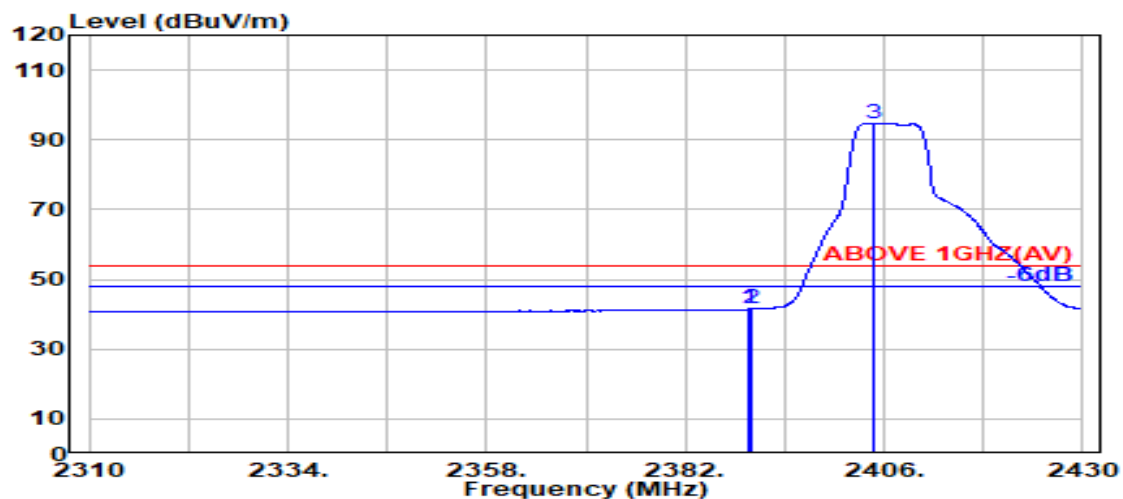

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.72	41.44	54.00	12.56	Average
2390.000	28.18	6.03	34.50	41.73	41.45	54.00	12.55	Average
@ 2404.600	28.13	6.06	34.50	95.17	94.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

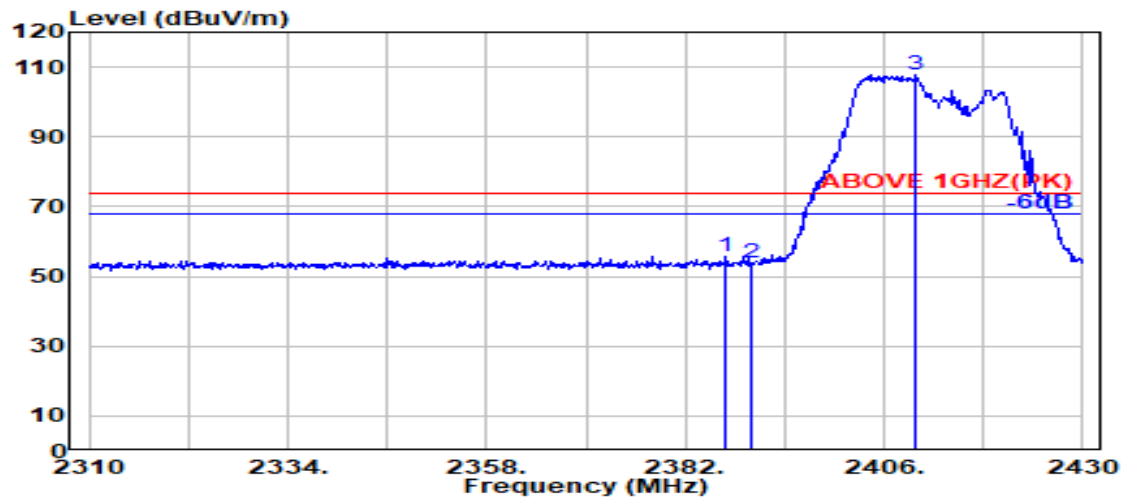

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.20	6.03	34.50	55.93	55.67	74.00	18.33	Peak
2390.000	28.18	6.03	34.50	54.25	53.97	74.00	20.03	Peak
@ 2409.900	28.16	6.06	34.50	108.09	107.81	---	---	Peak

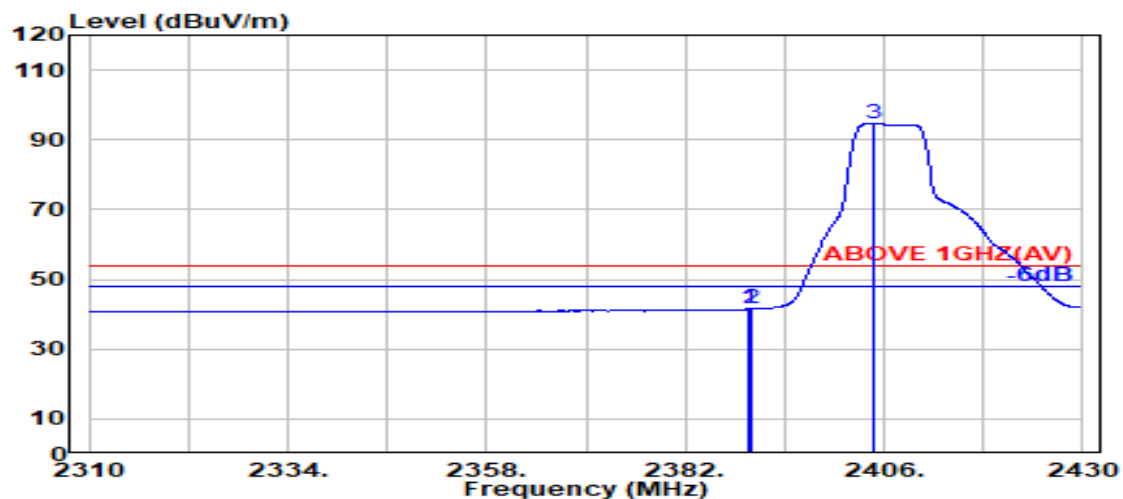

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.75	41.47	54.00	12.53	Average
2390.000	28.18	6.03	34.50	41.76	41.47	54.00	12.53	Average
@ 2404.800	28.13	6.06	34.50	95.02	94.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

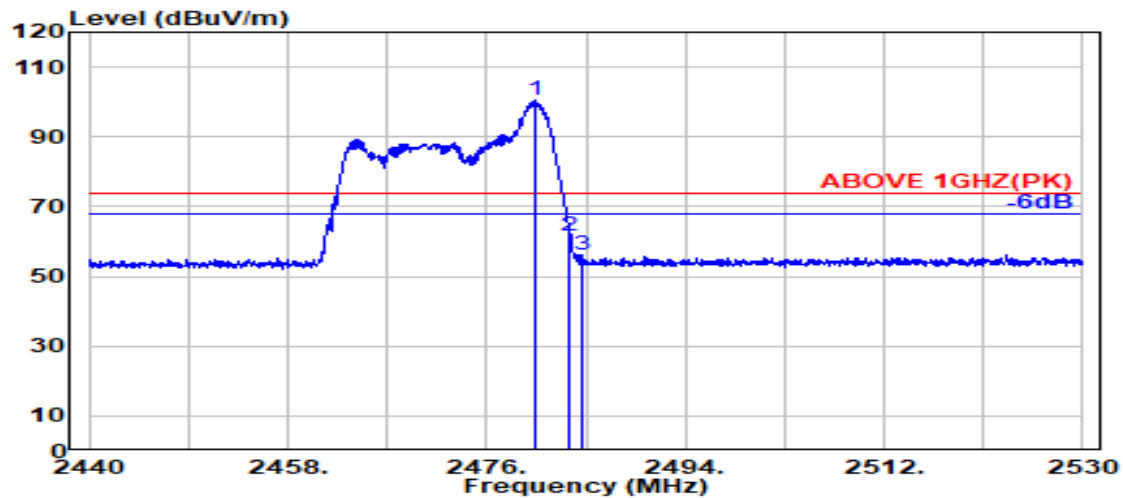

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	28.46	6.16	34.52	100.41	100.52	---	---	Peak
	2483.500	28.47	6.17	34.52	61.48	61.59	74.00	12.41	Peak
	2484.550	28.47	6.17	34.52	56.02	56.14	74.00	17.86	Peak

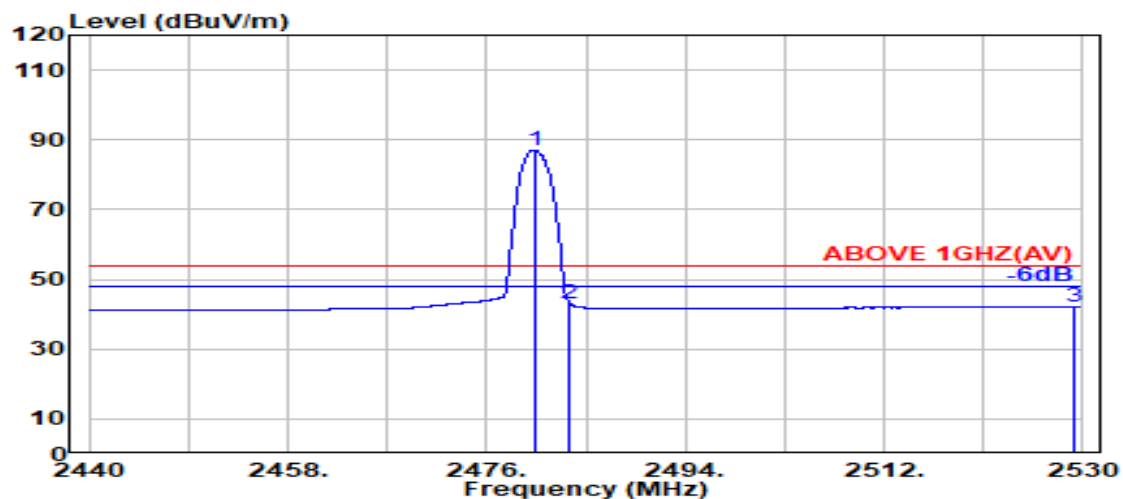

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	28.46	6.16	34.52	86.96	87.07	---	---	Average
	2483.500	28.47	6.17	34.52	43.09	43.21	54.00	10.79	Average
	2529.100	28.68	6.22	34.53	41.73	42.11	54.00	11.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

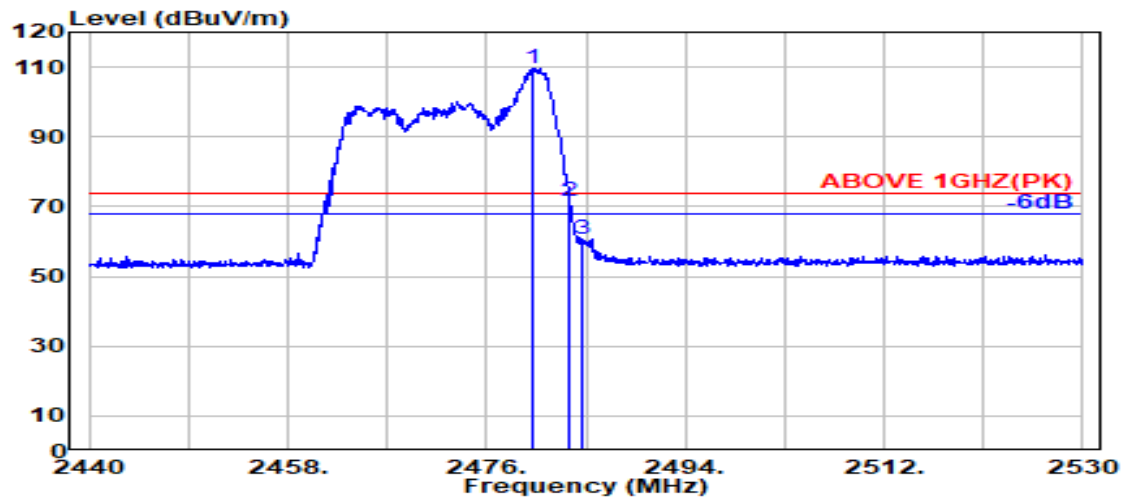

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.200	28.46	6.16	34.52	109.60	109.70	---	---	Peak
	2483.500	28.47	6.17	34.52	71.46	71.58	74.00	2.42	Peak
	2484.700	28.47	6.17	34.52	60.49	60.61	74.00	13.39	Peak

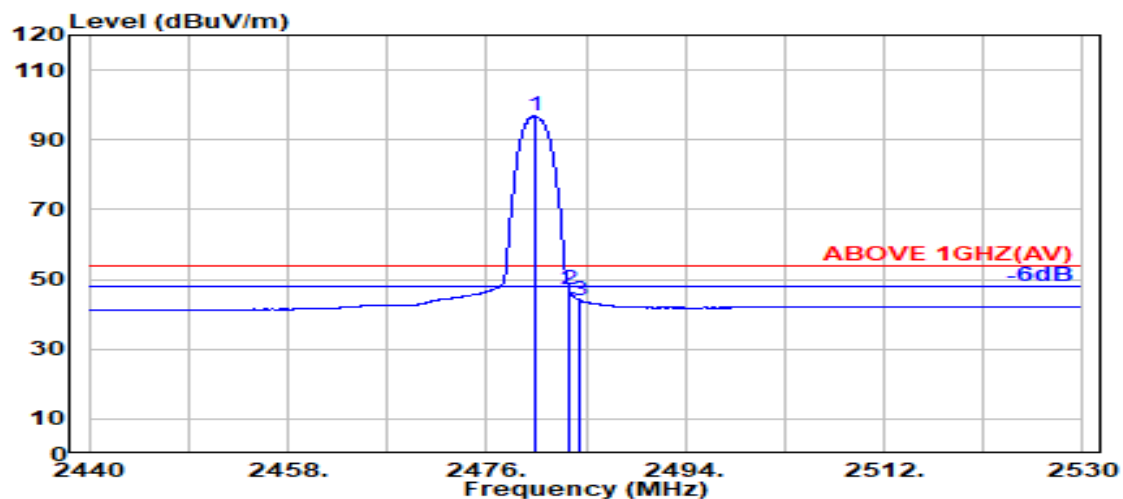

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.350	28.46	6.16	34.52	96.62	96.73	---	---	Average
	2483.500	28.47	6.17	34.52	46.80	46.92	54.00	7.08	Average
	2484.500	28.47	6.17	34.52	43.82	43.94	54.00	10.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

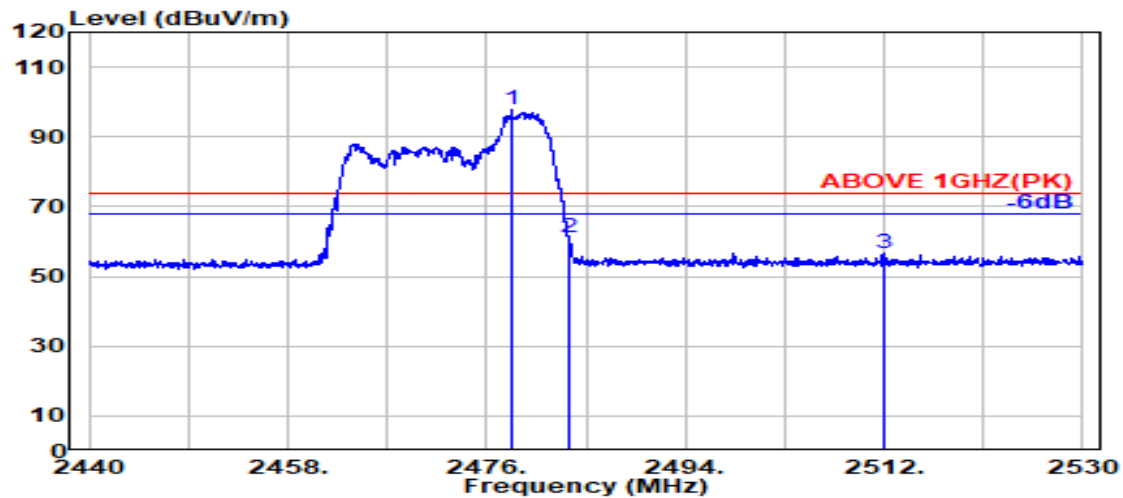

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.250	28.46	6.16	34.52	97.90	98.00	---	---	Peak
	2483.500	28.47	6.17	34.52	60.85	60.97	74.00	13.03	Peak
	2511.900	28.57	6.20	34.52	56.26	56.51	74.00	17.49	Peak

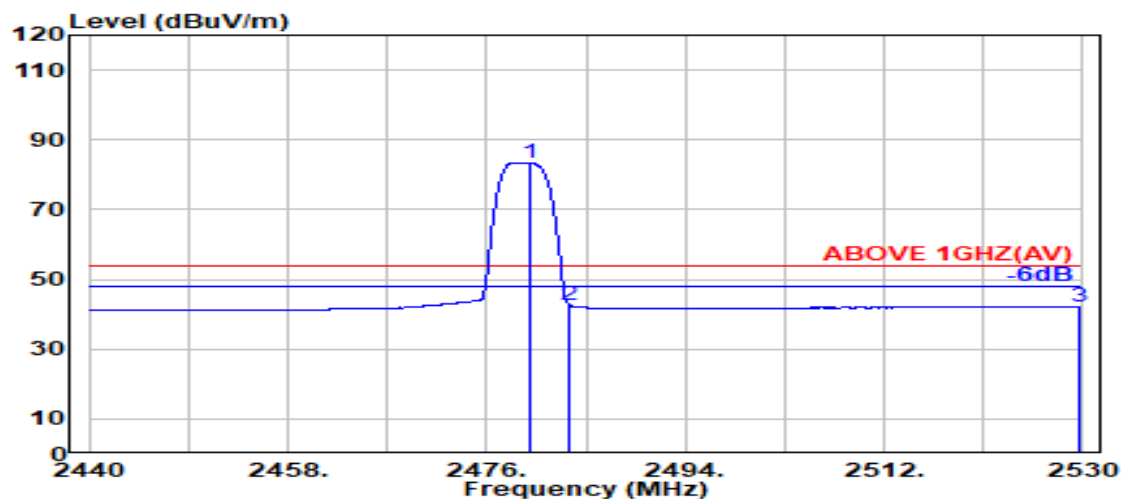

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.900	28.46	6.16	34.52	83.37	83.48	---	---	Average
	2483.500	28.47	6.17	34.52	42.62	42.74	54.00	11.26	Average
	2529.650	28.68	6.22	34.53	41.75	42.13	54.00	11.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

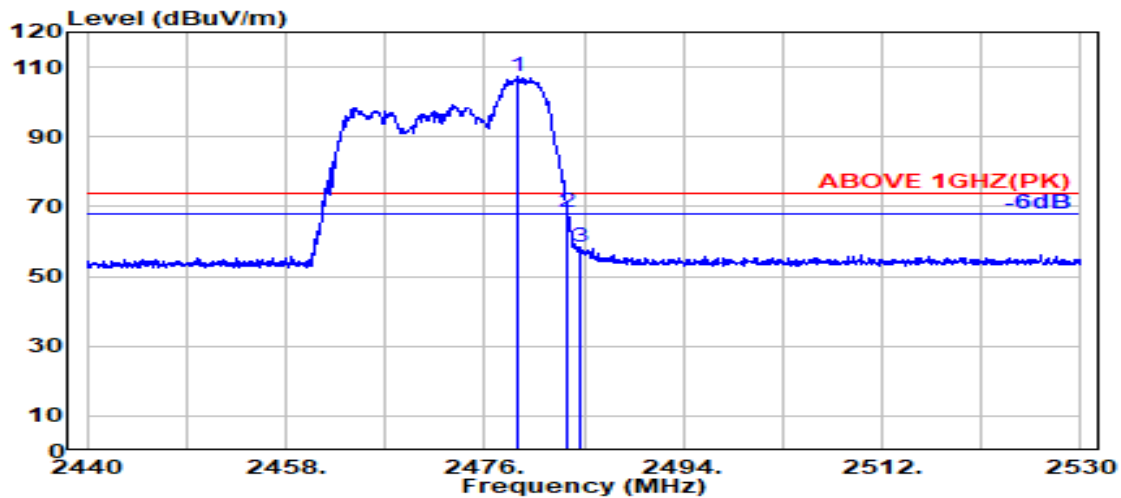

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.950	28.46	6.16	34.52	107.20	107.31	---	---	Peak
2483.500	28.47	6.17	34.52	68.14	68.26	74.00	5.74	Peak
2484.700	28.47	6.17	34.52	58.09	58.21	74.00	15.79	Peak

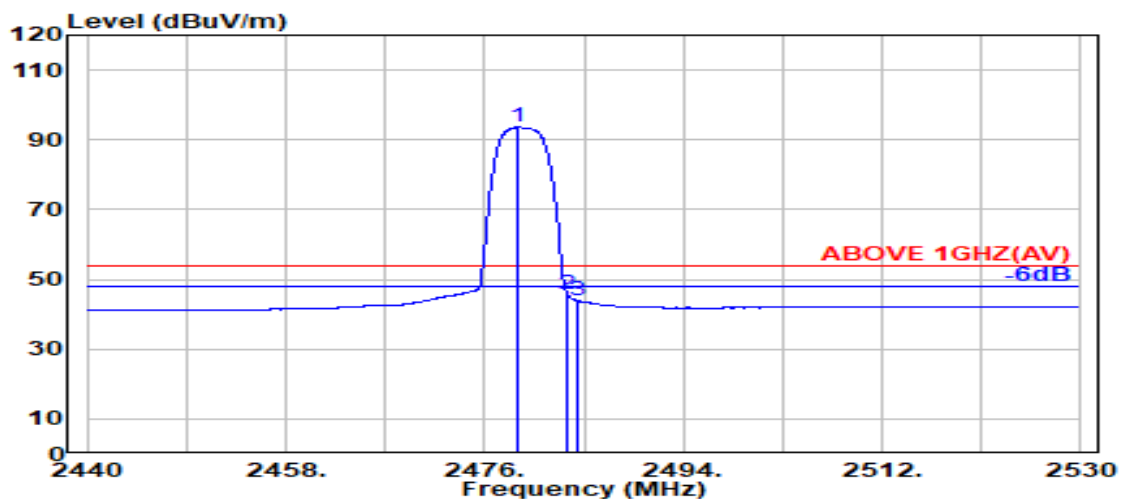

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.46	6.16	34.52	93.47	93.57	---	---	Average
2483.500	28.47	6.17	34.52	45.67	45.78	54.00	8.22	Average
2484.500	28.47	6.17	34.52	43.72	43.84	54.00	10.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

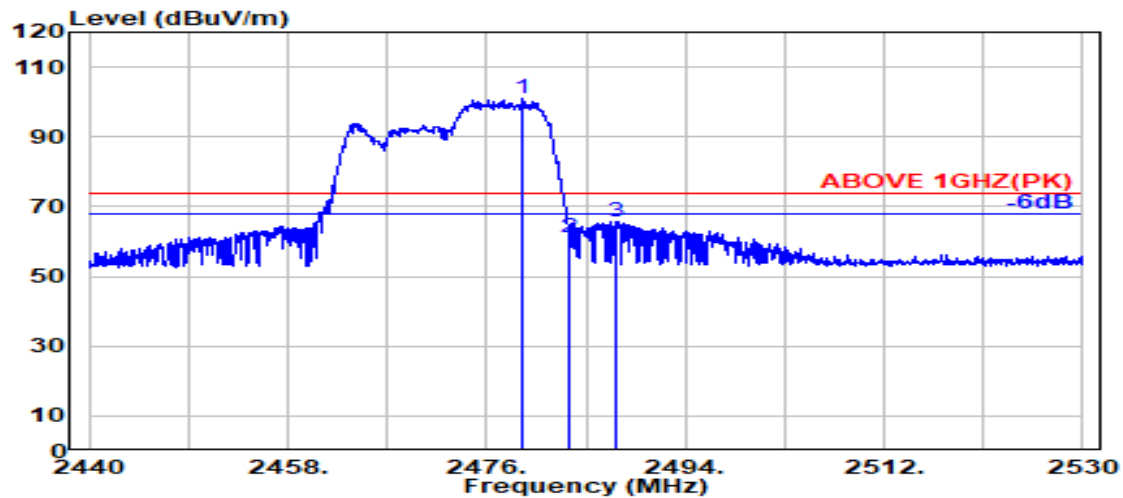

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.46	6.16	34.52	101.09	101.20	---	---	Peak
2483.500	28.47	6.17	34.52	61.13	61.25	74.00	12.75	Peak
2487.800	28.48	6.17	34.52	65.59	65.72	74.00	8.28	Peak

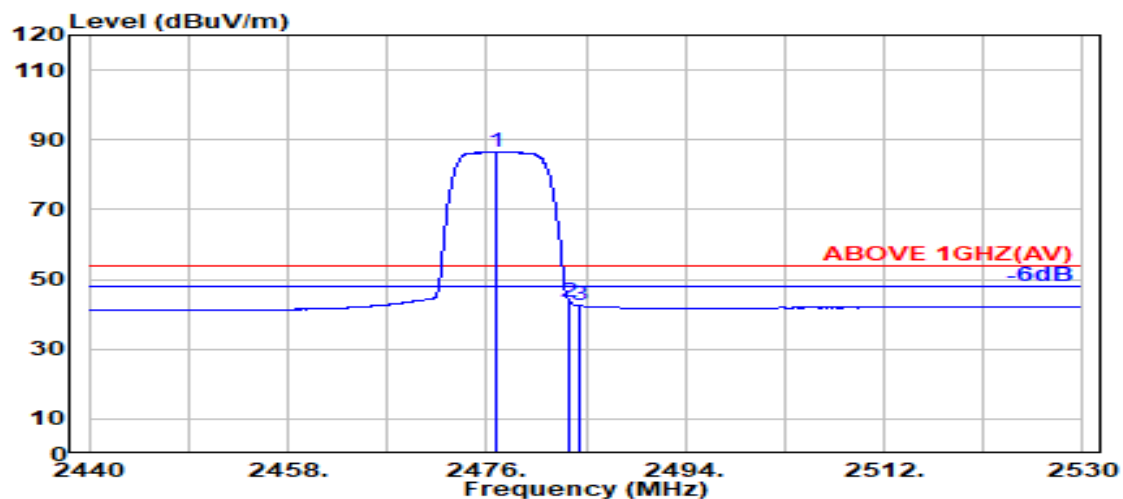

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.950	28.45	6.16	34.52	86.35	86.45	---	---	Average
2483.500	28.47	6.17	34.52	43.49	43.61	54.00	10.39	Average
2484.500	28.47	6.17	34.52	42.28	42.40	54.00	11.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

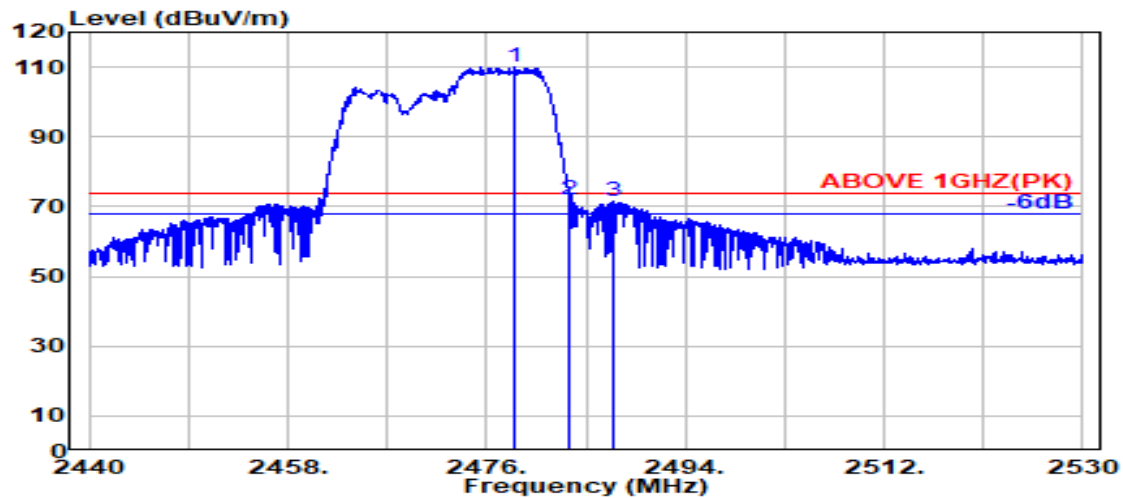

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.46	6.16	34.52	110.07	110.17	---	---	Peak
2483.500	28.47	6.17	34.52	72.04	72.16	74.00	1.84	Peak
2487.400	28.47	6.17	34.52	71.26	71.39	74.00	2.61	Peak

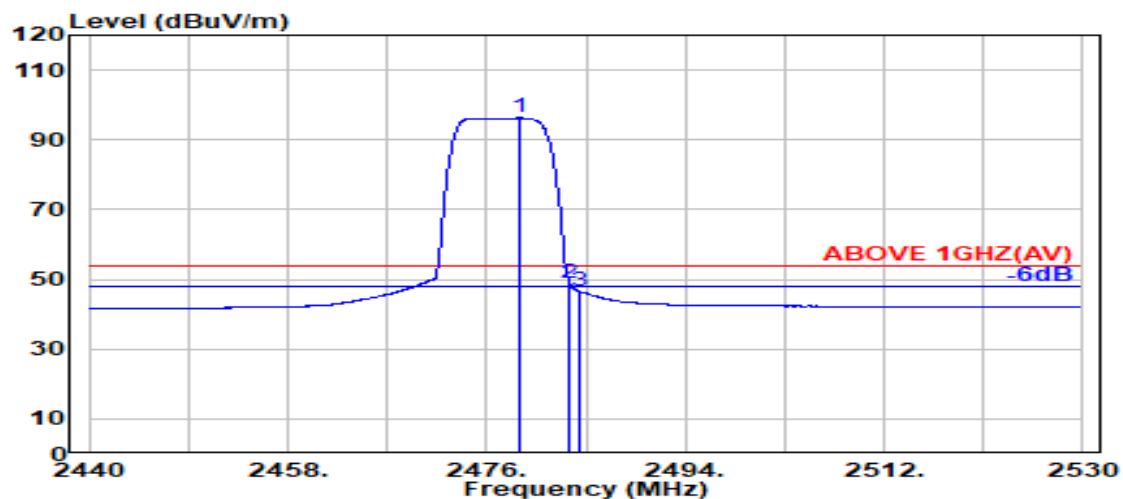

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.46	6.16	34.52	96.18	96.28	---	---	Average
2483.500	28.47	6.17	34.52	48.84	48.96	54.00	5.04	Average
2484.500	28.47	6.17	34.52	46.36	46.48	54.00	7.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

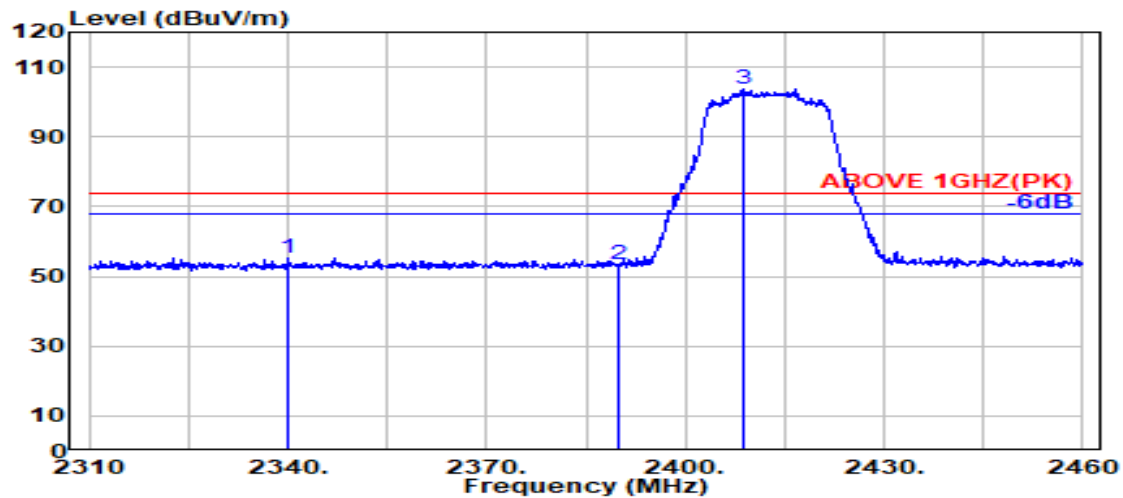

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2340.200	28.42	5.96	34.49	55.51	55.40	74.00	18.60	Peak
2390.000	28.18	6.03	34.50	53.66	53.37	74.00	20.63	Peak
@ 2408.600	28.15	6.06	34.50	103.86	103.57	---	---	Peak

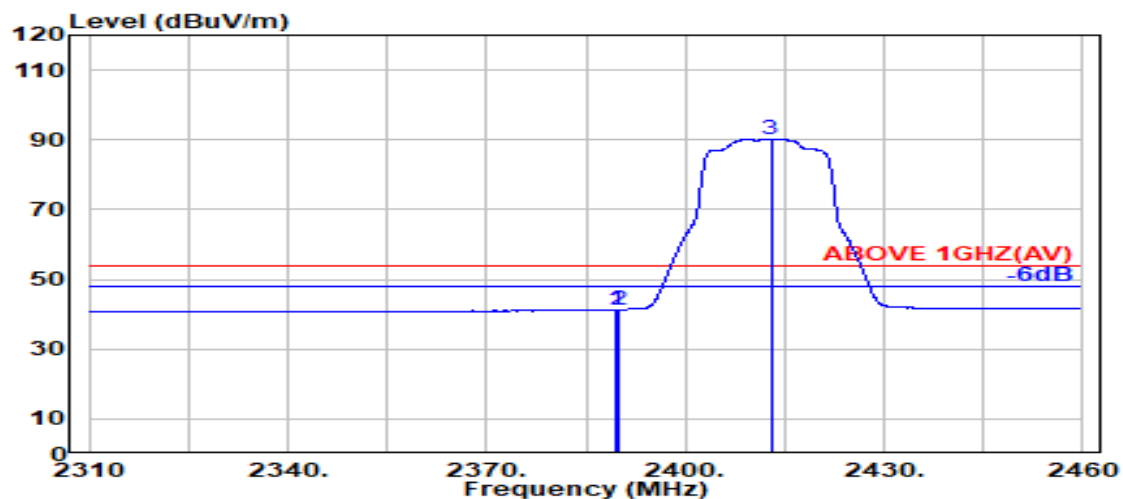

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	41.59	41.31	54.00	12.69	Average
2390.000	28.18	6.03	34.50	41.58	41.30	54.00	12.70	Average
@ 2412.900	28.18	6.07	34.50	90.35	90.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

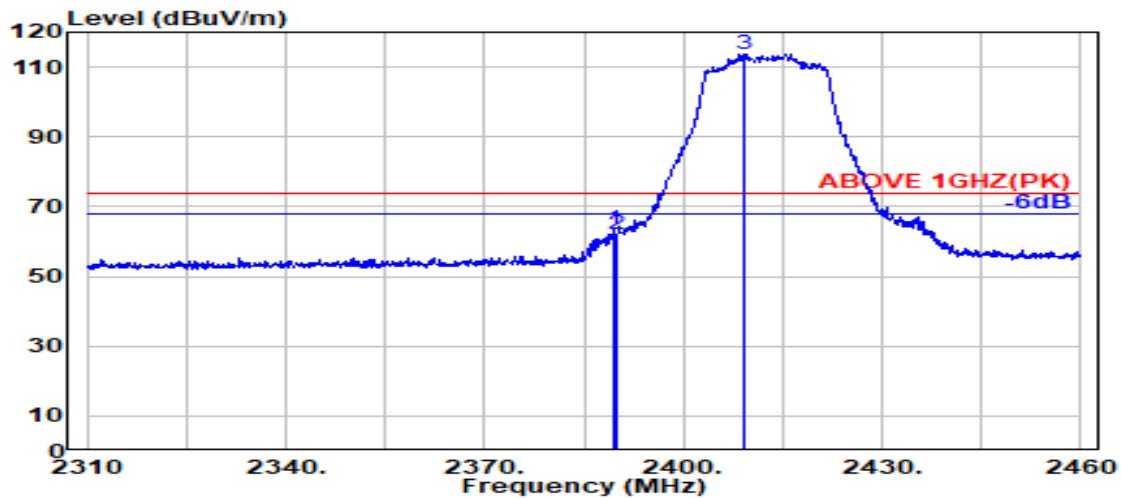

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	63.70	63.42	74.00	10.58	Peak
2390.000	28.18	6.03	34.50	62.16	61.88	74.00	12.12	Peak
@ 2409.000	28.15	6.06	34.50	113.84	113.55	---	---	Peak

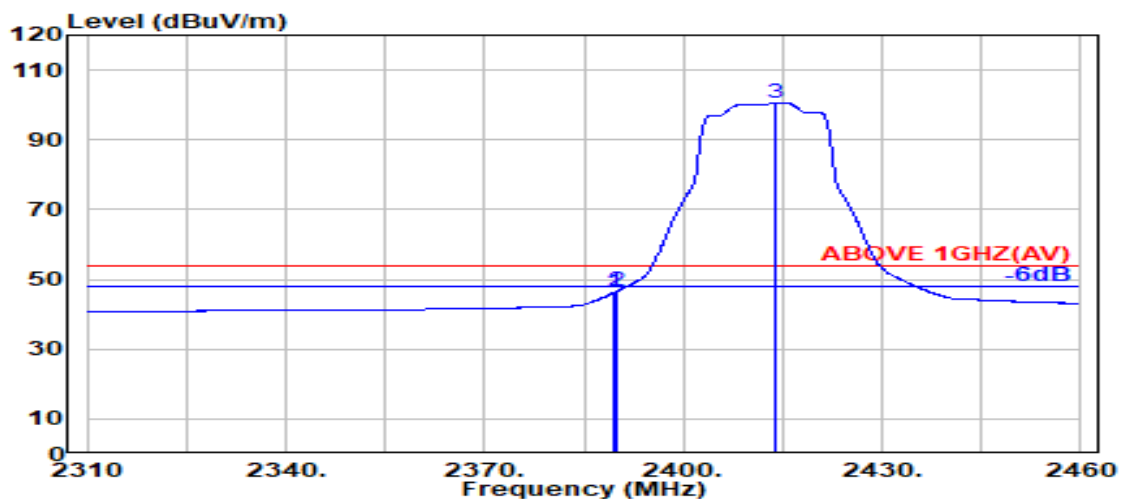

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	46.53	46.24	54.00	7.76	Average
2390.000	28.18	6.03	34.50	46.91	46.62	54.00	7.38	Average
@ 2413.900	28.18	6.07	34.50	100.78	100.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

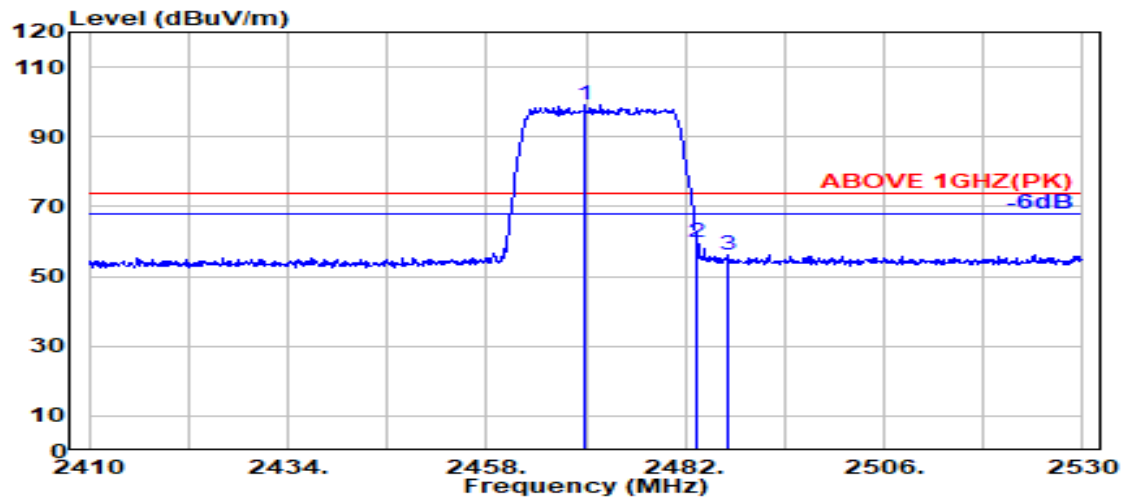

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.800	28.44	6.15	34.51	99.01	99.08	---	---	Peak
2483.500	28.47	6.17	34.52	59.66	59.78	74.00	14.22	Peak
2487.200	28.47	6.17	34.52	56.08	56.21	74.00	17.79	Peak

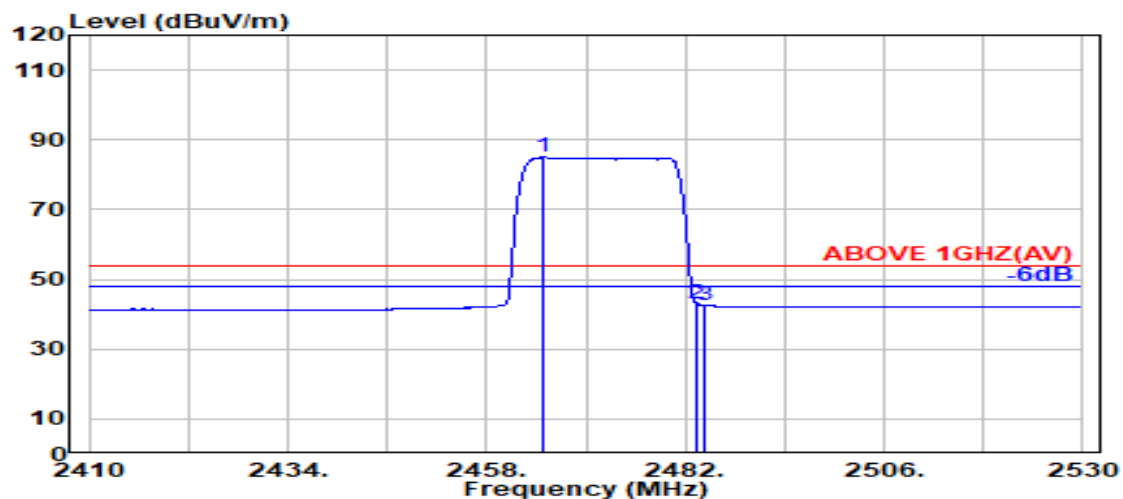

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.700	28.43	6.14	34.51	84.94	84.99	---	---	Average
2483.500	28.47	6.17	34.52	42.86	42.98	54.00	11.02	Average
2484.400	28.47	6.17	34.52	42.37	42.49	54.00	11.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

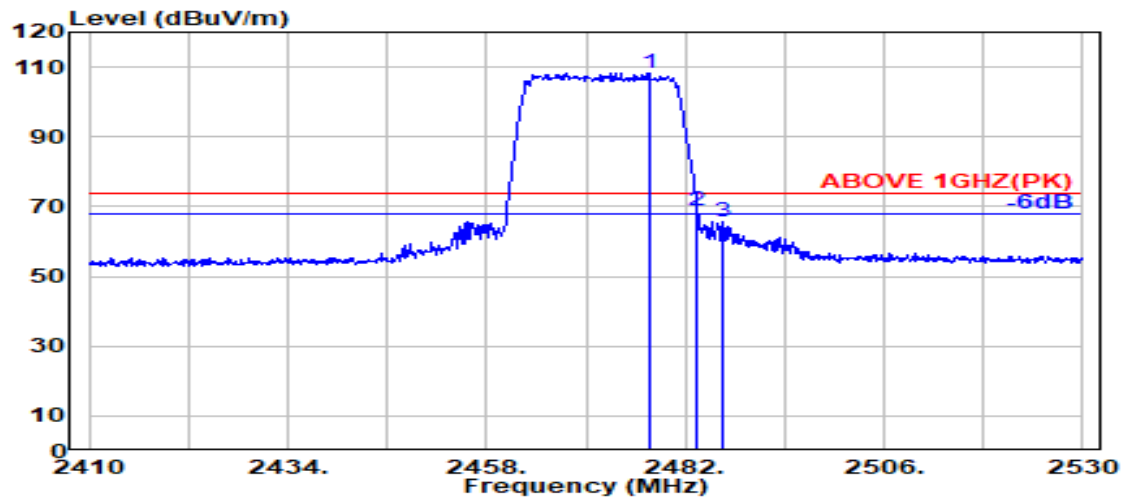

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.700	28.46	6.16	34.52	108.35	108.45	---	---	Peak
2483.500	28.47	6.17	34.52	68.64	68.76	74.00	5.24	Peak
2486.500	28.47	6.17	34.52	65.63	65.75	74.00	8.25	Peak

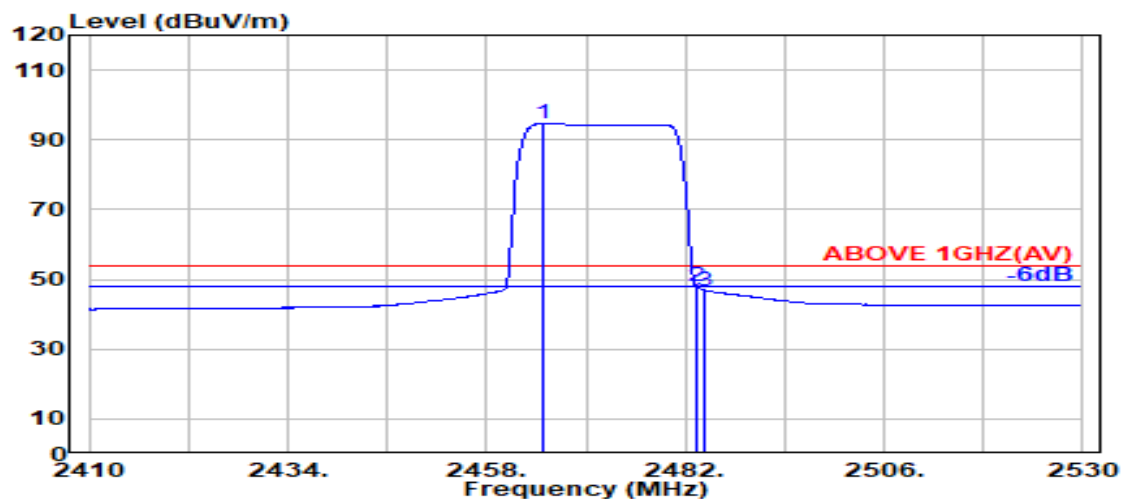

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.700	28.43	6.14	34.51	94.53	94.58	---	---	Average
2483.500	28.47	6.17	34.52	47.77	47.89	54.00	6.11	Average
2484.400	28.47	6.17	34.52	46.72	46.84	54.00	7.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

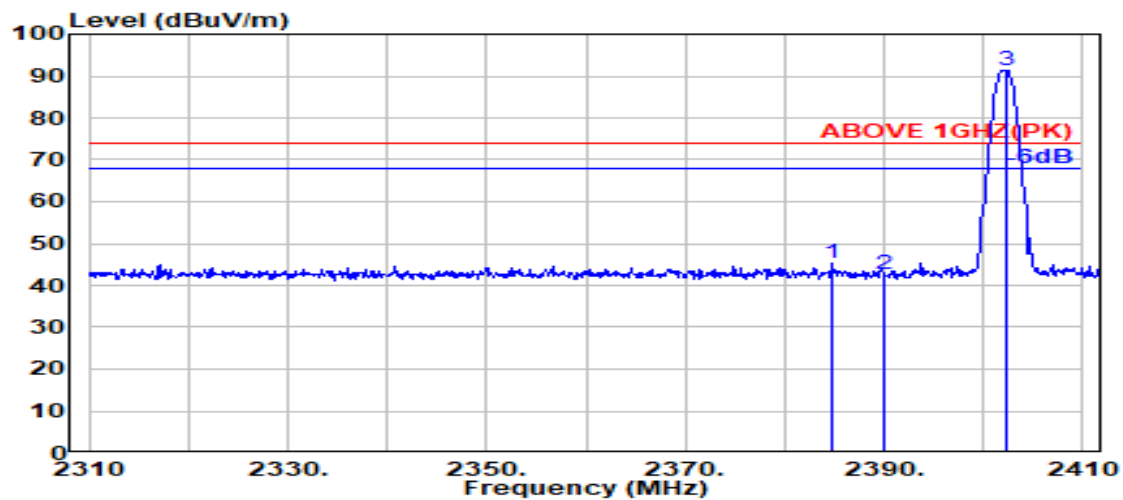

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.700	28.22	6.03	34.50	45.51	45.27	74.00	28.73	Peak
2390.000	28.18	6.03	34.50	42.77	42.48	74.00	31.52	Peak
@ 2402.400	28.11	6.05	34.50	91.55	91.22	---	---	Peak

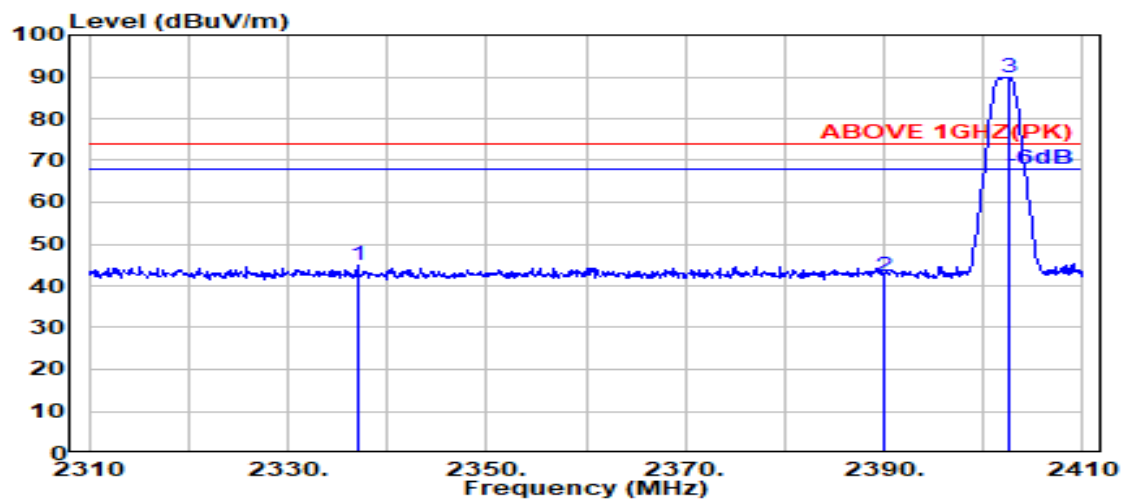

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2337.000	28.40	5.96	34.49	44.88	44.74	74.00	29.26	Peak
2390.000	28.18	6.03	34.50	42.59	42.30	74.00	31.70	Peak
@ 2402.600	28.12	6.05	34.50	90.30	89.97	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

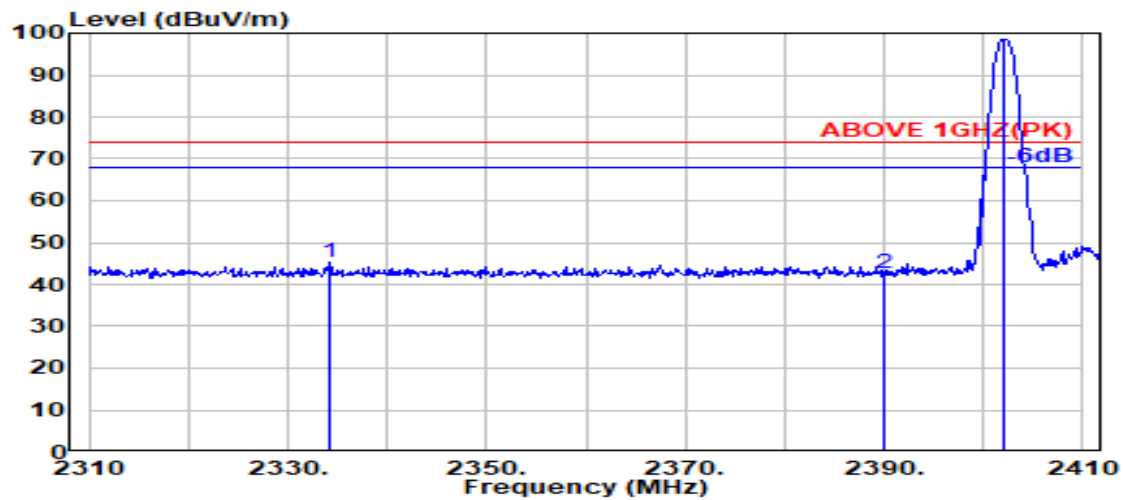

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2334.300	28.38	5.95	34.49	45.50	45.35	74.00	28.65	Peak
2390.000	28.18	6.03	34.50	43.09	42.81	74.00	31.19	Peak
@ 2402.100	28.11	6.05	34.50	98.72	98.38	---	---	Peak

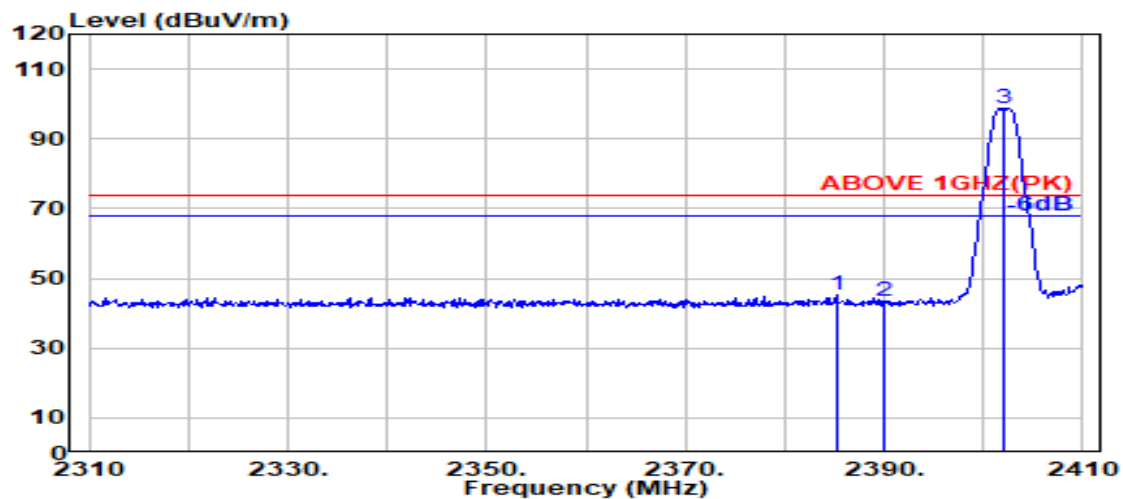

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.200	28.22	6.03	34.50	45.33	45.08	74.00	28.92	Peak
2390.000	28.18	6.03	34.50	43.92	43.63	74.00	30.37	Peak
@ 2402.100	28.11	6.05	34.50	98.99	98.66	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

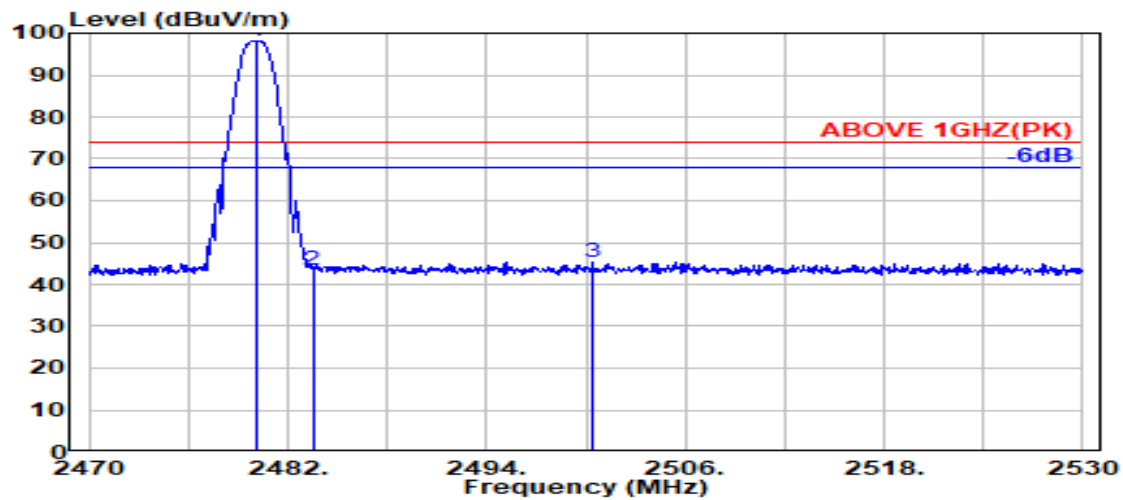

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	34.52	97.93	98.04	---	---	Peak
2483.500	28.47	6.17	34.52	43.45	43.57	74.00	30.43	Peak
2500.450	28.50	6.19	34.52	45.27	45.44	74.00	28.56	Peak

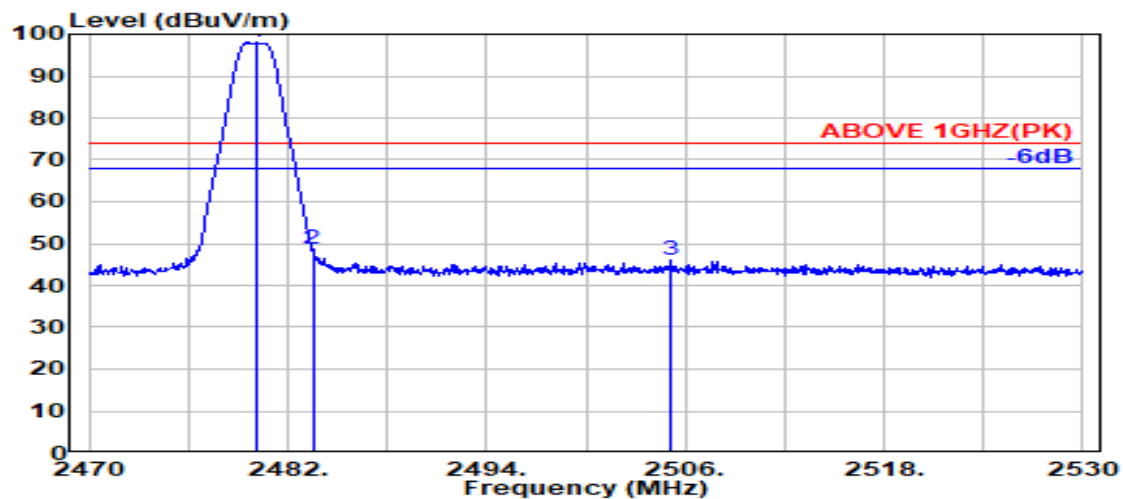

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.52	97.86	97.97	---	---	Peak
2483.500	28.47	6.17	34.52	48.56	48.68	74.00	25.32	Peak
2505.150	28.53	6.20	34.52	45.85	46.05	74.00	27.95	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

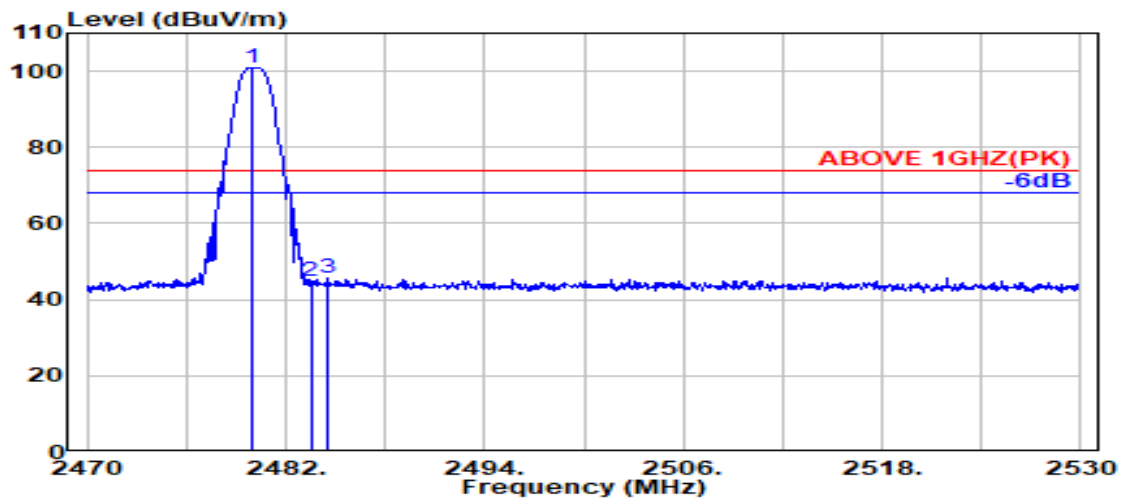

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.46	6.16	34.52	100.95	101.05	---	---	Peak
2483.500	28.47	6.17	34.52	44.72	44.84	74.00	29.16	Peak
2484.500	28.47	6.17	34.52	45.41	45.53	74.00	28.47	Peak

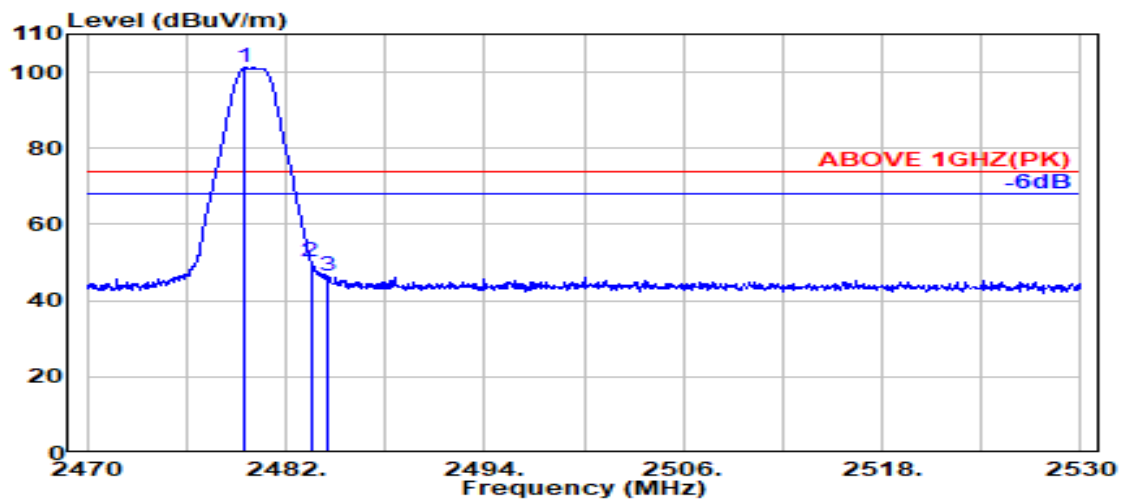

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.46	6.16	34.52	101.02	101.13	---	---	Peak
2483.500	28.47	6.17	34.52	50.28	50.40	74.00	23.60	Peak
2484.500	28.47	6.17	34.52	46.44	46.56	74.00	27.44	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


- With LUXSHARE-ICT Antenna
- Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

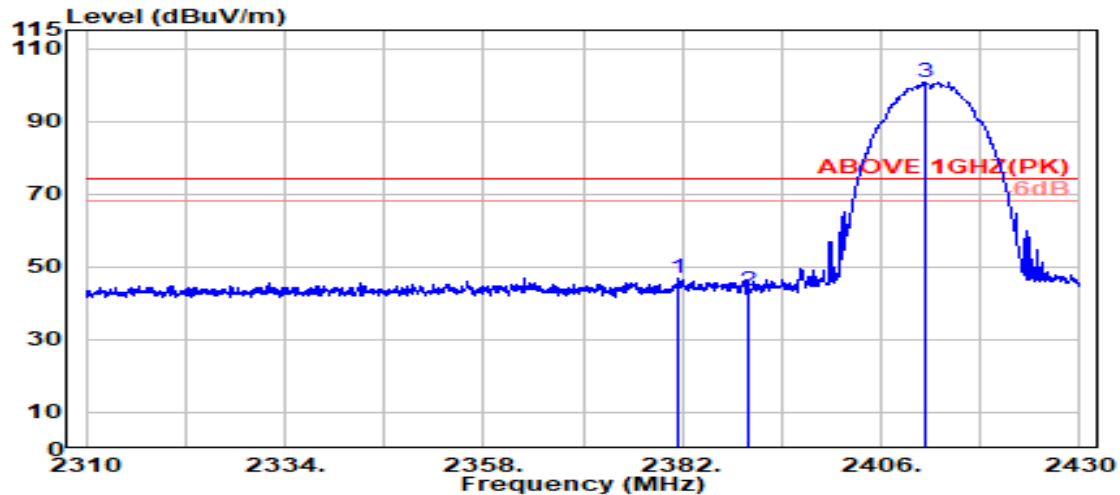

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.533	28.17	5.71	39.88	52.97	46.97	74.00	27.03	Peak
2390.000	28.14	5.72	39.88	49.35	43.33	74.00	30.67	Peak
@ 2411.200	28.15	5.75	39.88	106.65	100.67	---	---	Peak

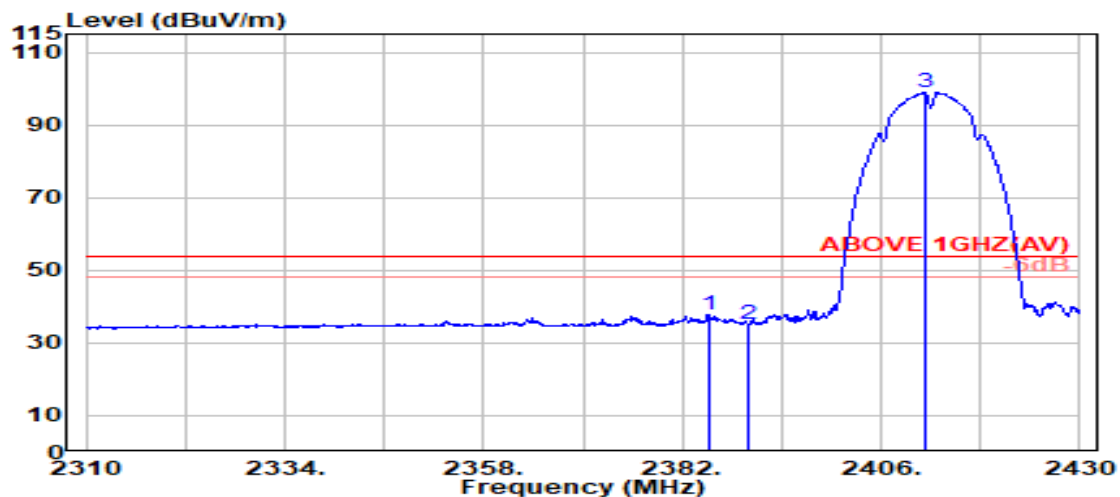

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.133	28.16	5.72	39.88	43.66	37.66	54.00	16.34	Average
2390.000	28.14	5.72	39.88	41.06	35.04	54.00	18.96	Average
@ 2411.267	28.15	5.75	39.88	104.86	98.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

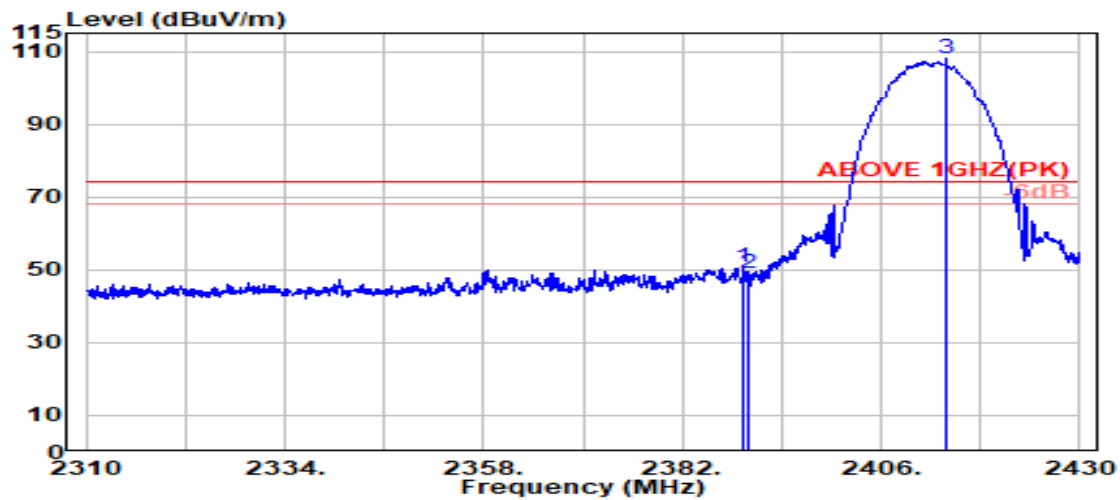

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.333	28.14	5.72	39.88	56.61	50.59	74.00	23.41	Peak
2390.000	28.14	5.72	39.88	55.07	49.05	74.00	24.95	Peak
@ 2413.867	28.16	5.75	39.88	114.18	108.21	---	---	Peak

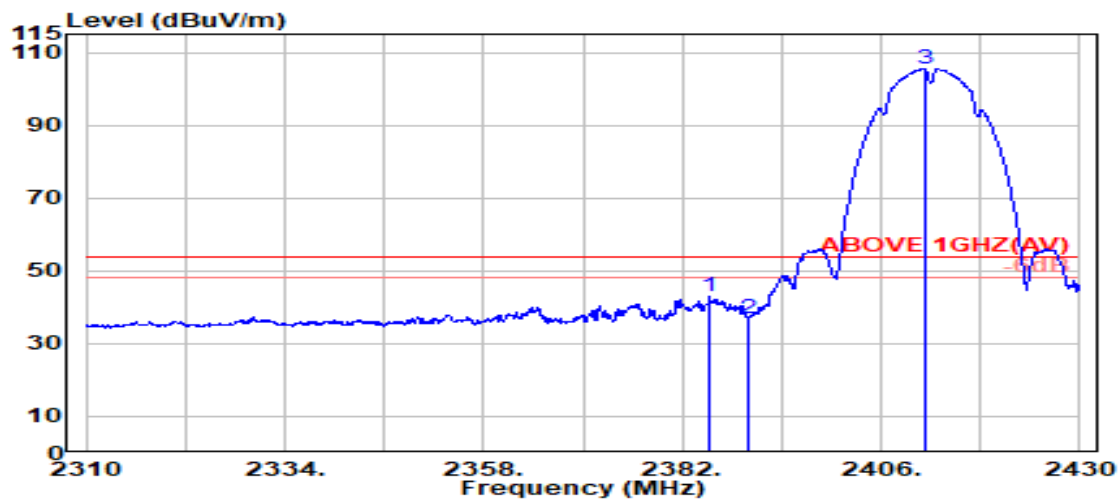

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.333	28.16	5.72	39.88	49.18	43.17	54.00	10.83	Average
2390.000	28.14	5.72	39.88	43.00	36.98	54.00	17.02	Average
@ 2411.267	28.15	5.75	39.88	111.47	105.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

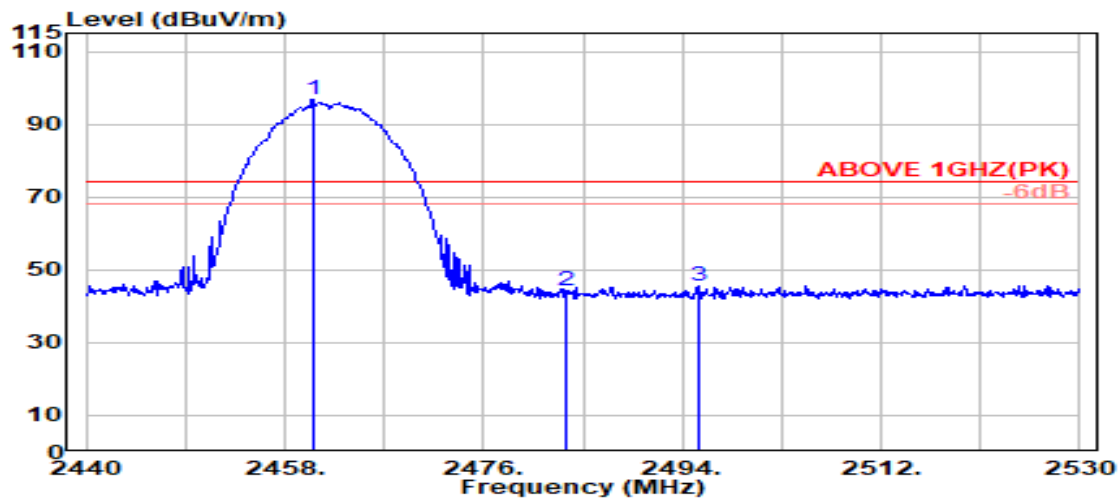

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.536	28.32	5.80	39.87	102.48	96.74	---	---	Peak
2483.500	28.37	5.83	39.87	49.88	44.21	74.00	29.79	Peak
2495.391	28.39	5.84	39.87	51.25	45.62	74.00	28.38	Peak

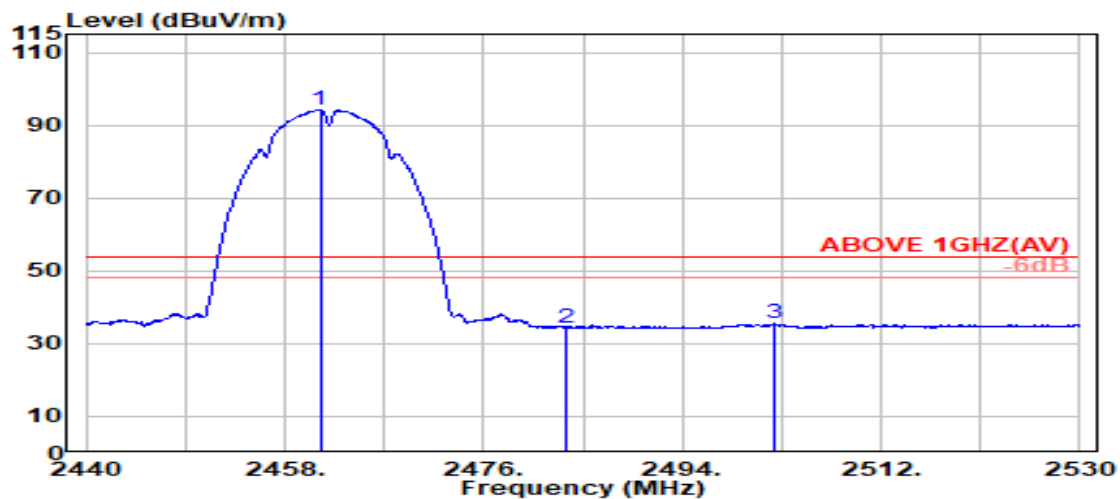

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.191	28.32	5.81	39.87	99.91	94.17	---	---	Average
2483.500	28.37	5.83	39.87	39.98	34.31	54.00	19.69	Average
2502.345	28.41	5.85	39.87	41.07	35.47	54.00	18.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

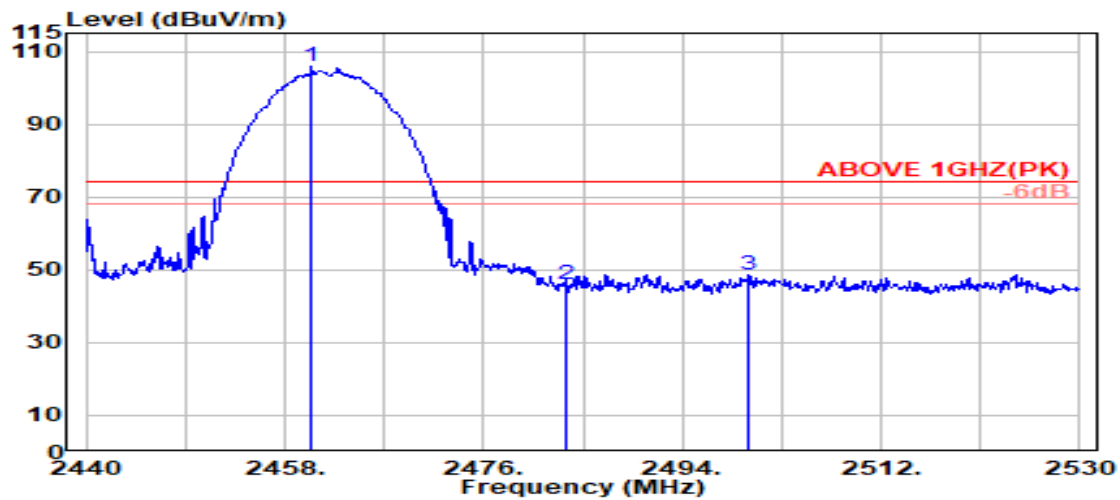

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.455	28.32	5.80	39.87	111.49	105.74	---	---	Peak
2483.500	28.37	5.83	39.87	51.85	46.18	74.00	27.82	Peak
2500.054	28.40	5.85	39.87	54.37	48.76	74.00	25.24	Peak

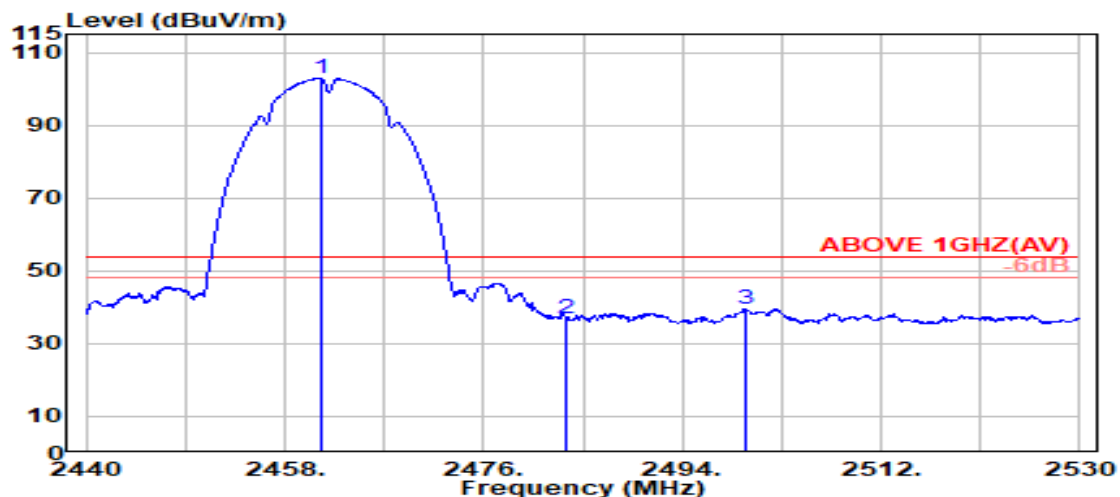

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.273	28.32	5.81	39.87	108.71	102.96	---	---	Average
2483.500	28.37	5.83	39.87	42.76	37.09	54.00	16.91	Average
2499.727	28.40	5.85	39.87	45.23	39.61	54.00	14.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

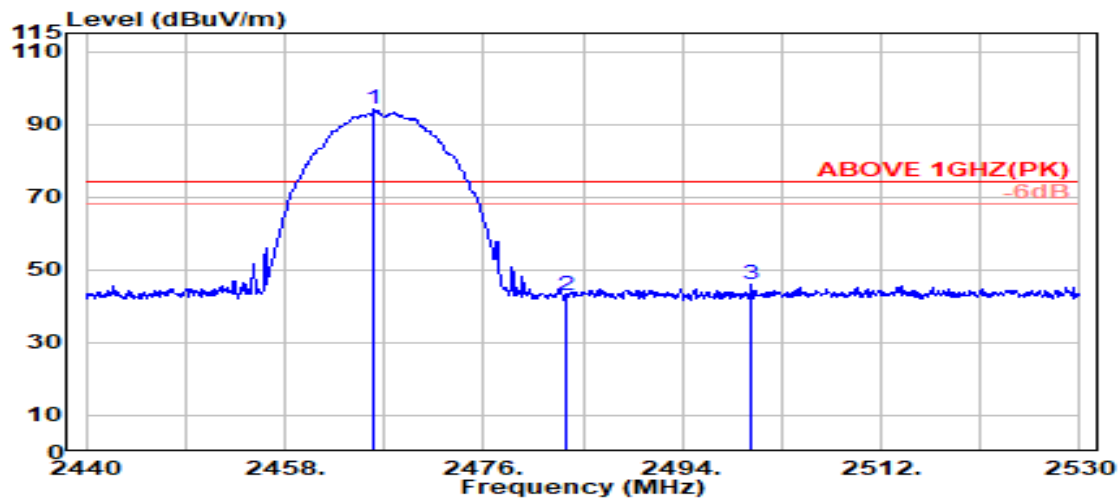

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	28.33	5.81	39.87	99.70	93.98	---	---	Peak
2483.500	28.37	5.83	39.87	48.84	43.17	74.00	30.83	Peak
2500.300	28.40	5.85	39.87	51.75	46.13	74.00	27.87	Peak

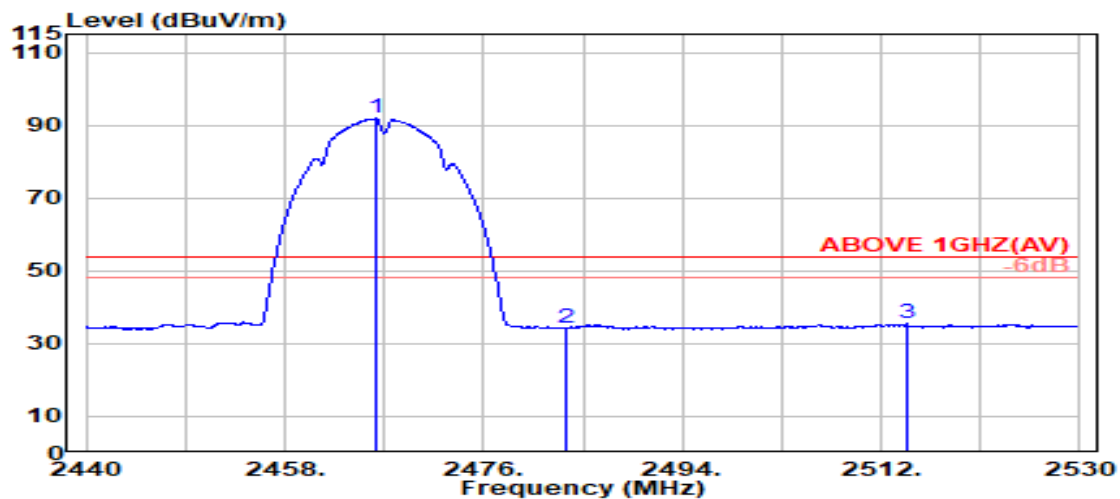


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.264	28.33	5.81	39.87	97.52	91.79	---	---	Average
2483.500	28.37	5.83	39.87	39.84	34.17	54.00	19.83	Average
2514.455	28.49	5.87	39.87	40.90	35.38	54.00	18.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

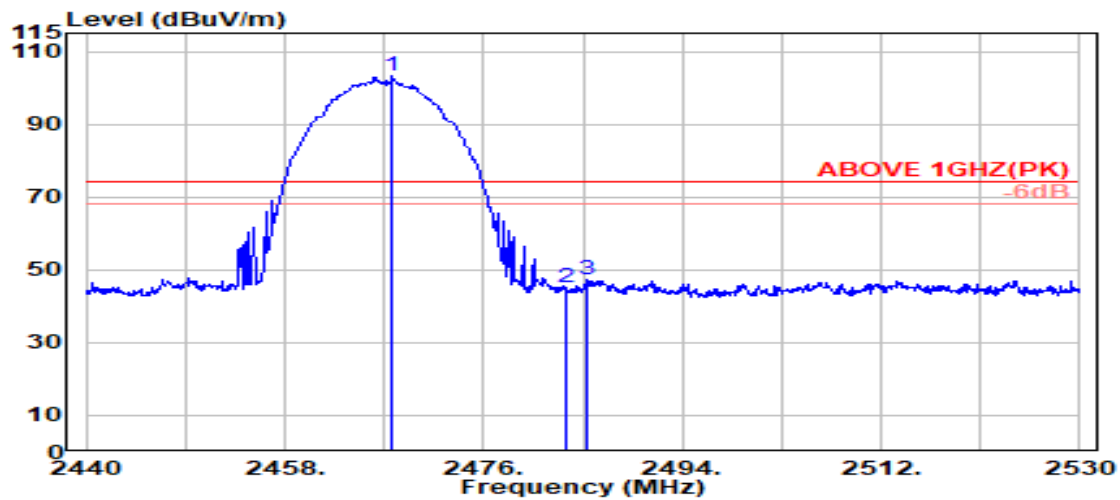

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.736	28.34	5.81	39.87	108.88	103.16	---	---	Peak
2483.500	28.37	5.83	39.87	50.85	45.18	74.00	28.82	Peak
2485.409	28.37	5.83	39.87	52.89	47.22	74.00	26.78	Peak

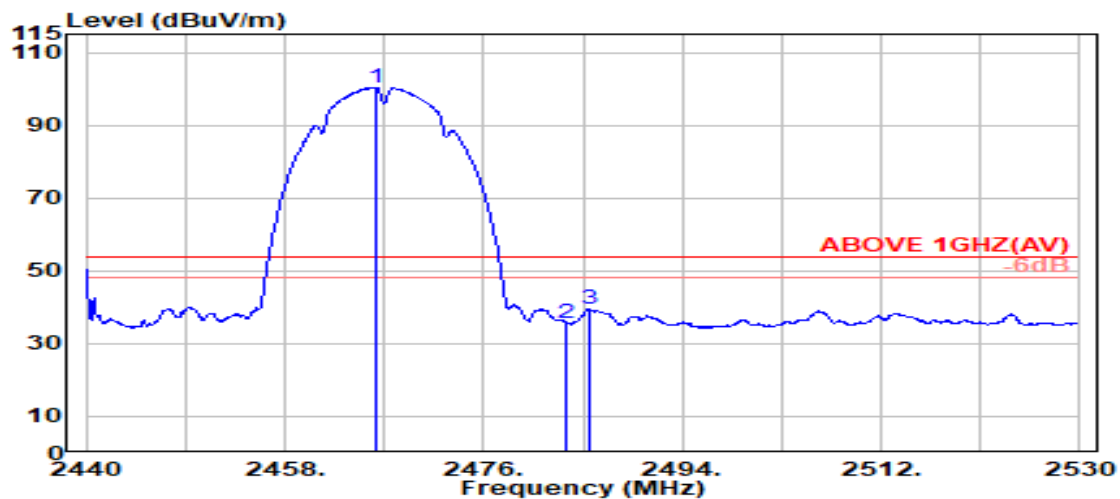

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.182	28.33	5.81	39.87	106.18	100.45	---	---	Average
2483.500	28.37	5.83	39.87	41.35	35.68	54.00	18.32	Average
2485.491	28.37	5.83	39.87	45.02	39.35	54.00	14.65	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

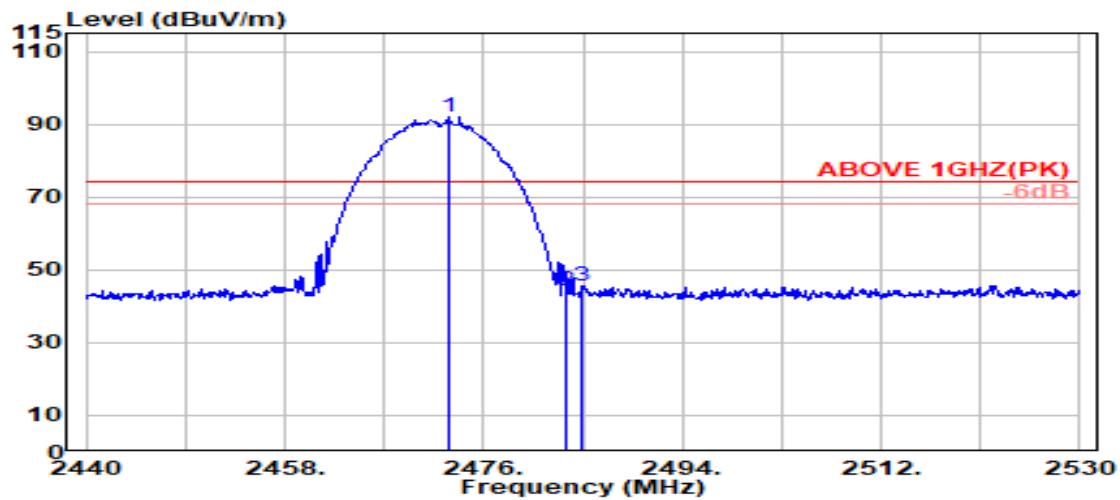

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.809	28.35	5.82	39.87	97.52	91.82	---	---	Peak
2483.500	28.37	5.83	39.87	49.80	44.12	74.00	29.88	Peak
2484.836	28.37	5.83	39.87	51.36	45.69	74.00	28.31	Peak

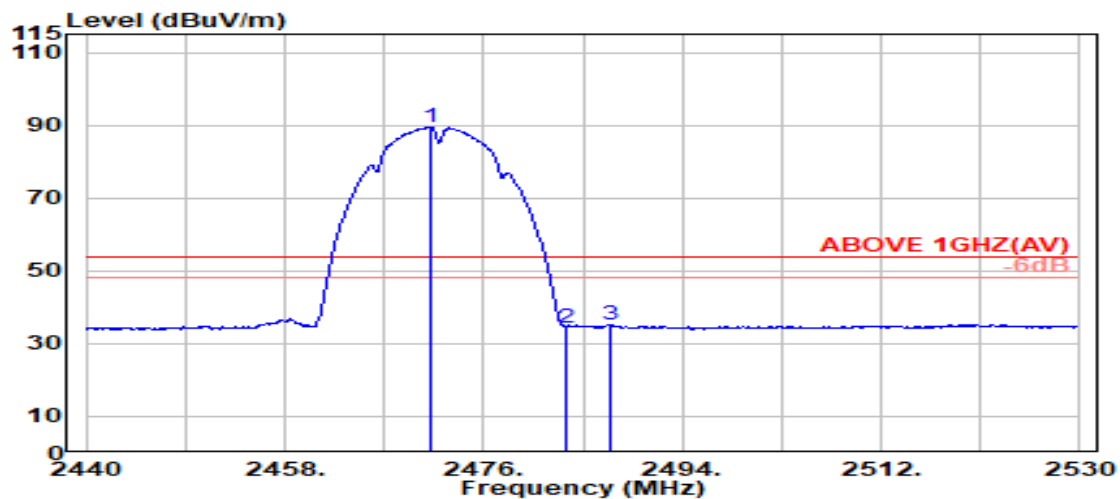

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.255	28.34	5.82	39.87	95.08	89.37	---	---	Average
2483.500	28.37	5.83	39.87	40.17	34.49	54.00	19.51	Average
2487.455	28.38	5.84	39.87	40.85	35.19	54.00	18.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

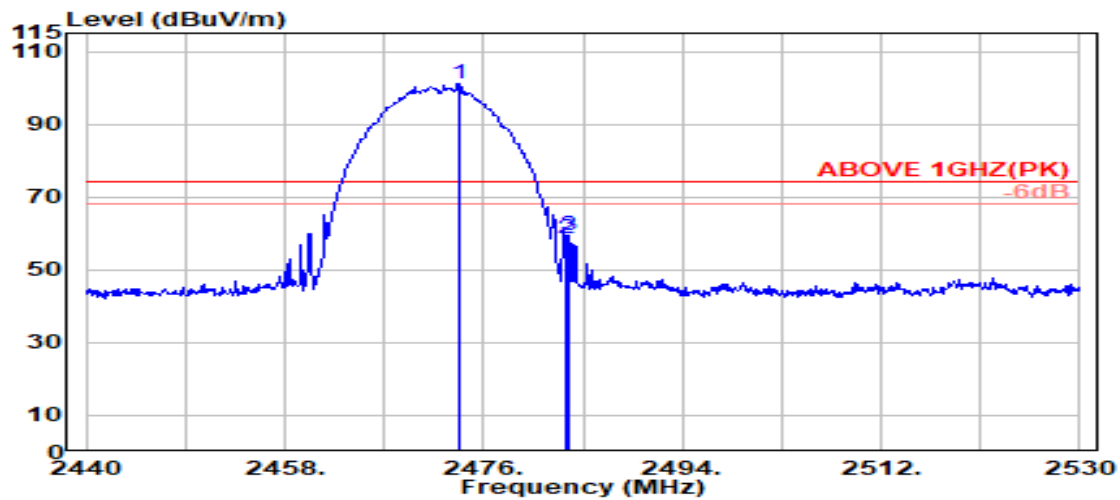

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.709	28.35	5.82	39.87	106.83	101.12	---	---	Peak
2483.500	28.37	5.83	39.87	64.45	58.77	74.00	15.23	Peak
2483.691	28.37	5.83	39.87	64.98	59.31	74.00	14.69	Peak

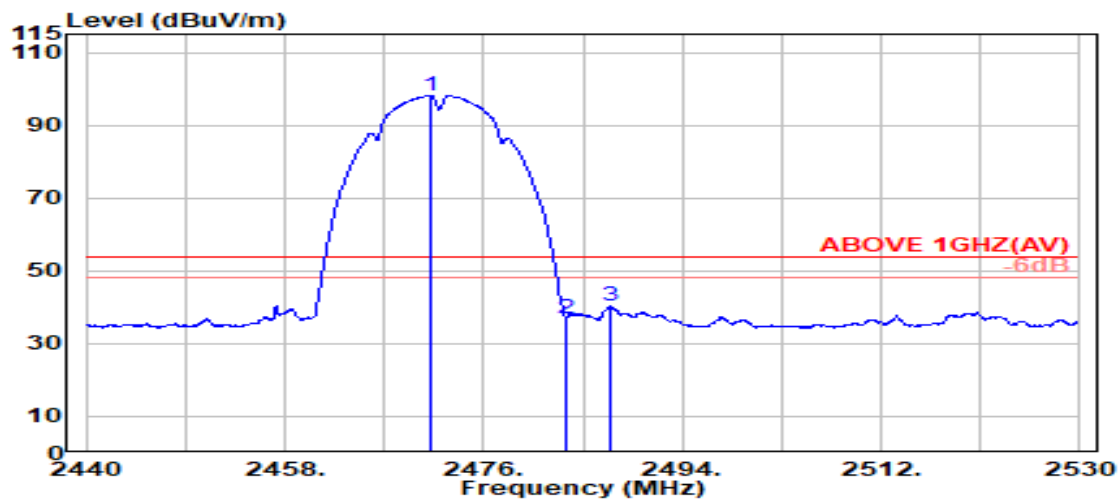

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.255	28.34	5.82	39.87	103.96	98.24	---	---	Average
2483.500	28.37	5.83	39.87	42.63	36.95	54.00	17.05	Average
2487.536	28.38	5.84	39.87	45.83	40.17	54.00	13.83	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

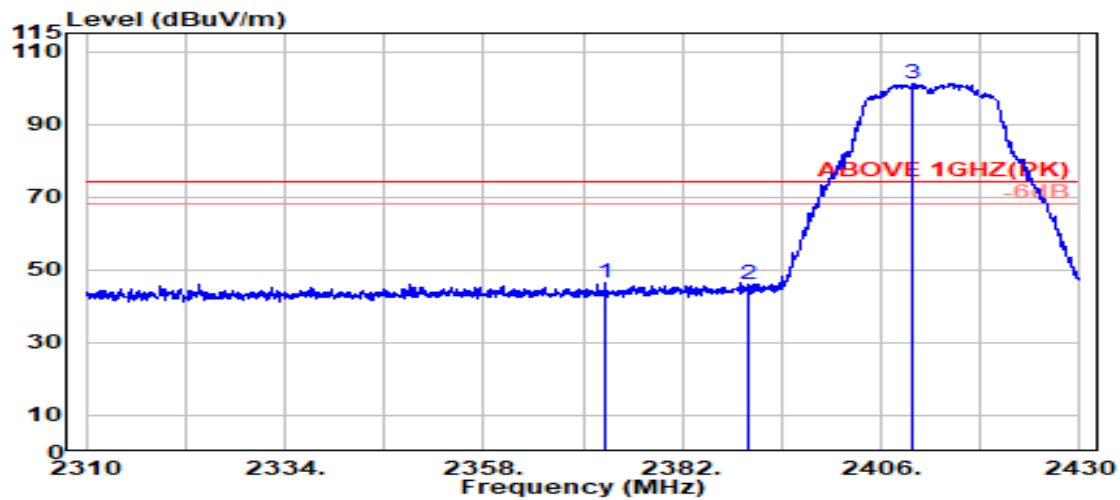

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.600	28.21	5.70	39.88	52.58	46.61	74.00	27.39	Peak
2390.000	28.14	5.72	39.88	52.08	46.06	74.00	27.94	Peak
@ 2409.867	28.14	5.74	39.88	107.09	101.09	---	---	Peak

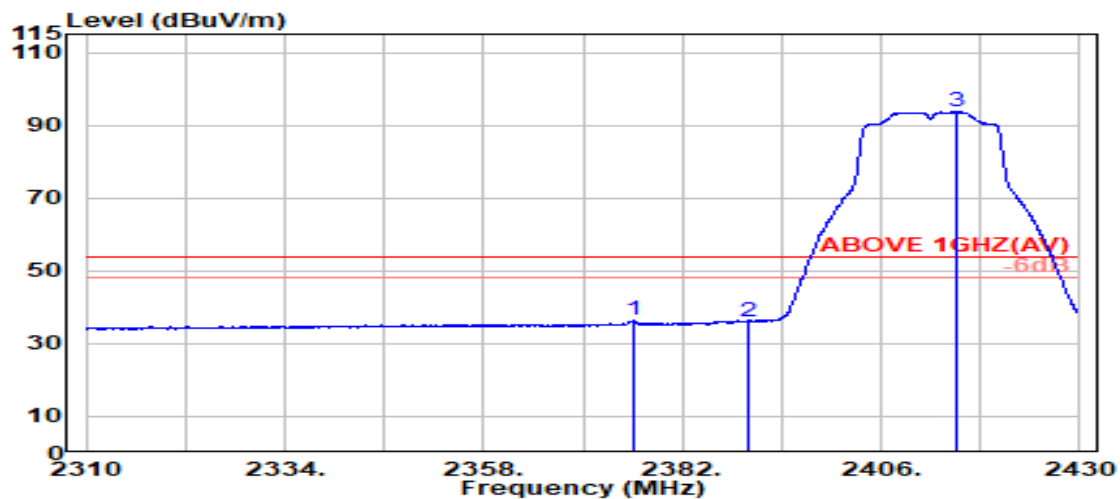

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.70	39.88	42.40	36.42	54.00	17.58	Average
2390.000	28.14	5.72	39.88	42.02	36.01	54.00	17.99	Average
@ 2415.200	28.16	5.75	39.88	99.60	93.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

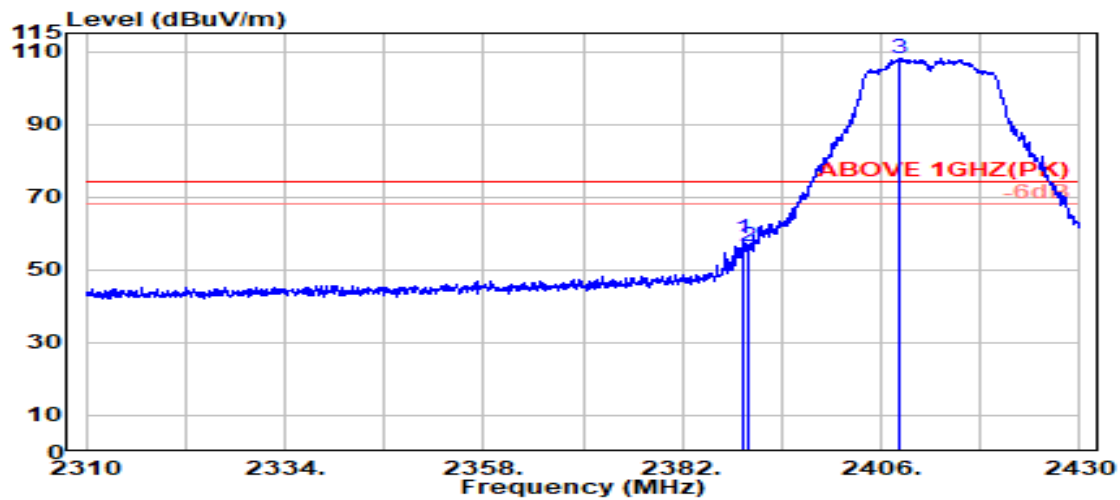

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.267	28.14	5.72	39.88	64.60	58.58	74.00	15.42	Peak
2390.000	28.14	5.72	39.88	62.46	56.45	74.00	17.55	Peak
@ 2408.333	28.13	5.74	39.88	114.05	108.05	---	---	Peak

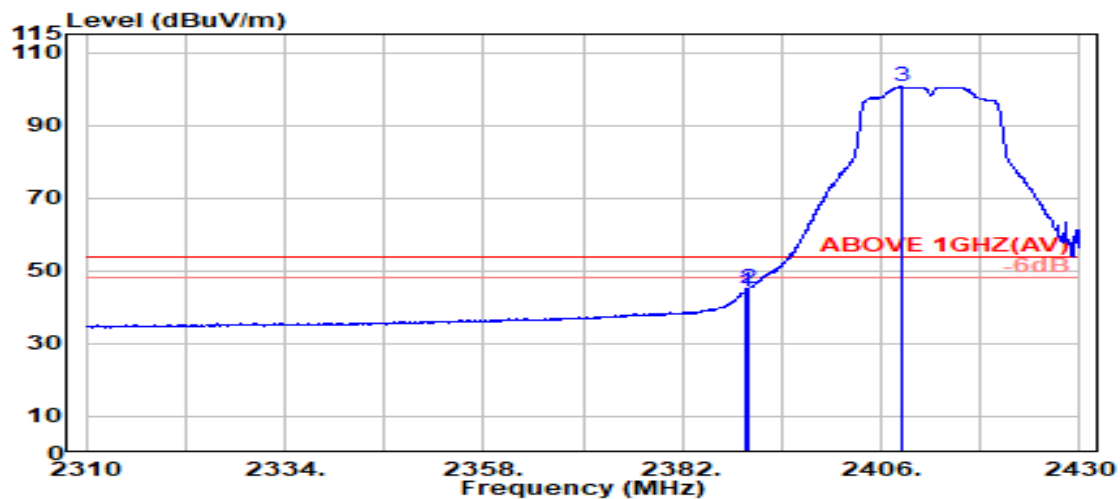

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.26	44.25	54.00	9.75	Average
2390.000	28.14	5.72	39.88	51.27	45.25	54.00	8.75	Average
@ 2408.400	28.13	5.74	39.88	106.53	100.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

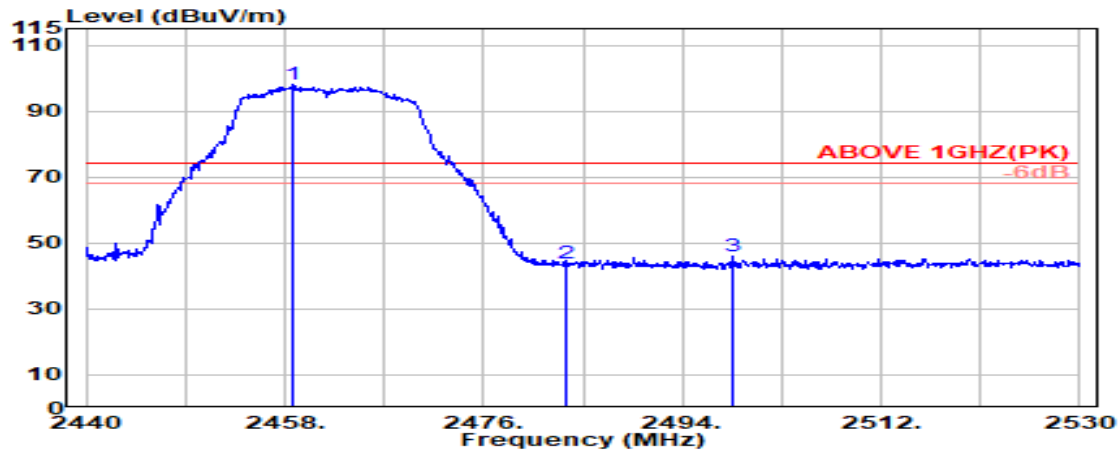

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.655	28.32	5.80	39.87	103.90	98.14	---	---	Peak
2483.500	28.37	5.83	39.87	49.52	43.85	74.00	30.15	Peak
2498.664	28.40	5.85	39.87	51.67	46.05	74.00	27.95	Peak

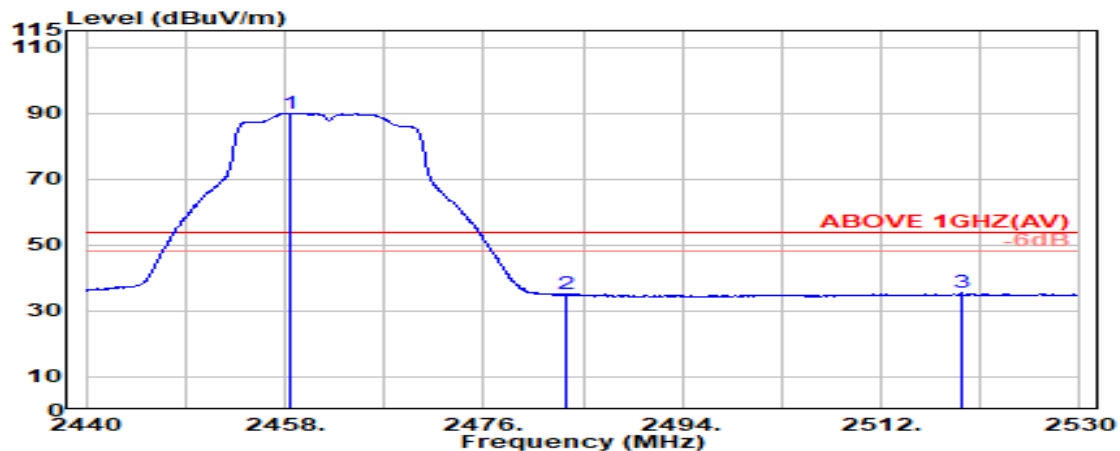

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.409	28.32	5.80	39.87	95.62	89.87	---	---	Average
2483.500	28.37	5.83	39.87	40.87	35.20	54.00	18.80	Average
2519.200	28.52	5.87	39.88	40.86	35.37	54.00	18.63	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

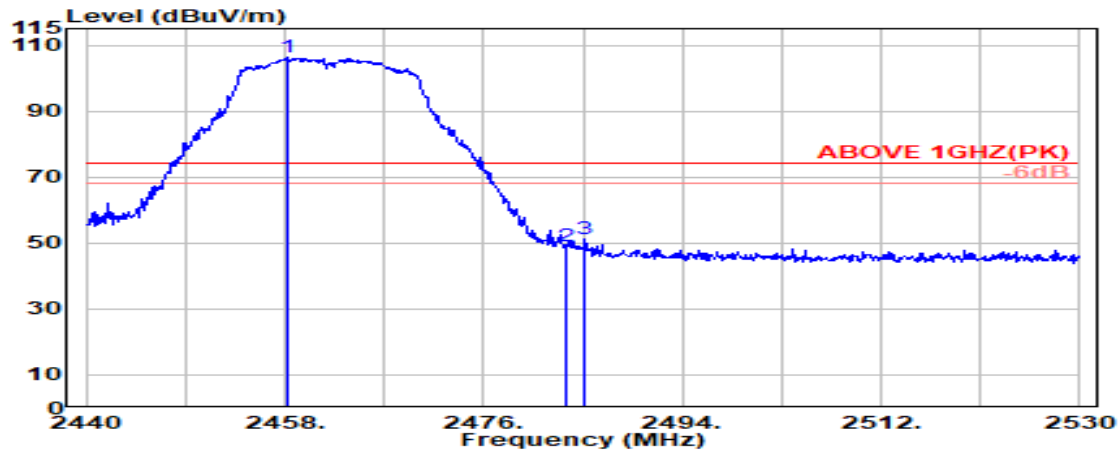

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.327	28.32	5.80	39.87	112.25	106.49	---	---	Peak
2483.500	28.37	5.83	39.87	54.66	48.99	74.00	25.01	Peak
2485.164	28.37	5.83	39.87	56.86	51.19	74.00	22.81	Peak

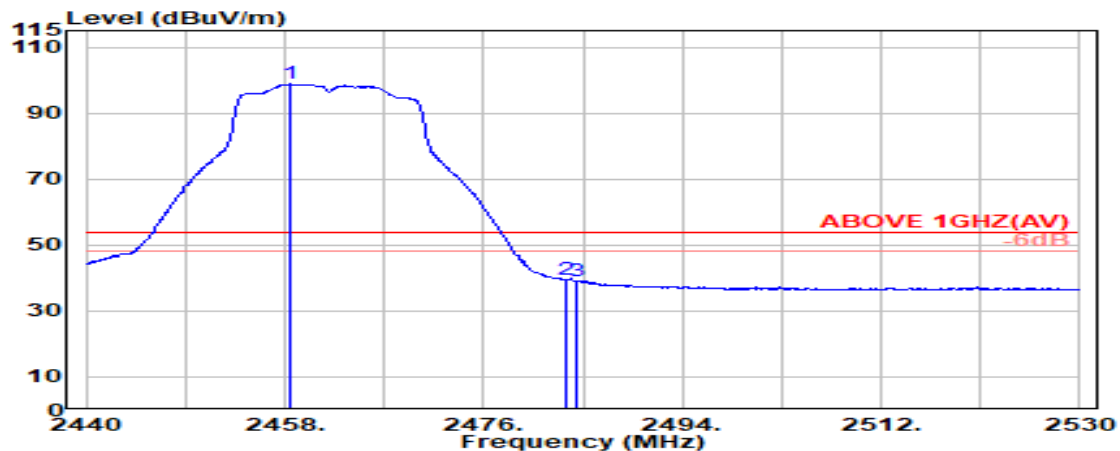

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.409	28.32	5.80	39.87	104.54	98.78	---	---	Average
2483.500	28.37	5.83	39.87	45.07	39.39	54.00	14.61	Average
2484.509	28.37	5.83	39.87	44.88	39.21	54.00	14.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

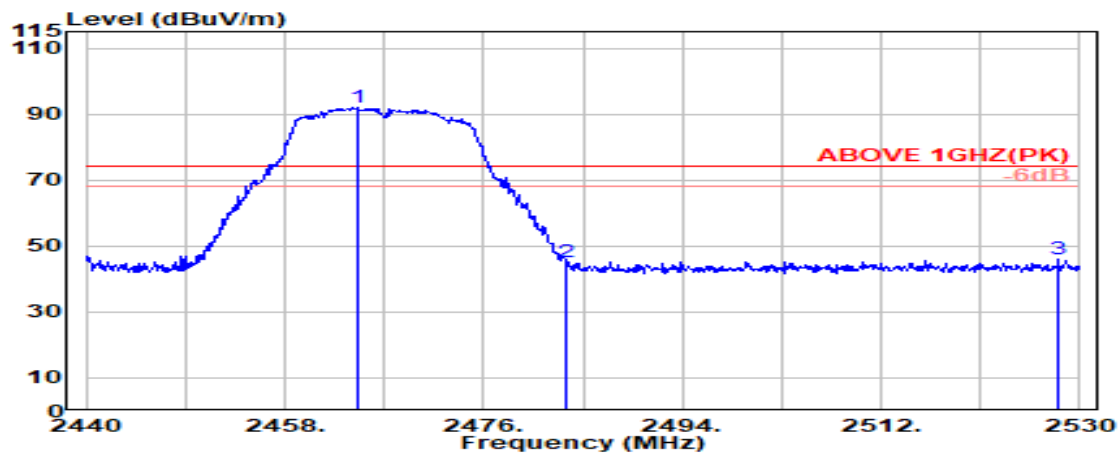

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.709	28.33	5.81	39.87	97.76	92.03	---	---	Peak
2483.500	28.37	5.83	39.87	50.64	44.97	74.00	29.03	Peak
2528.036	28.57	5.88	39.88	51.24	45.81	74.00	28.19	Peak

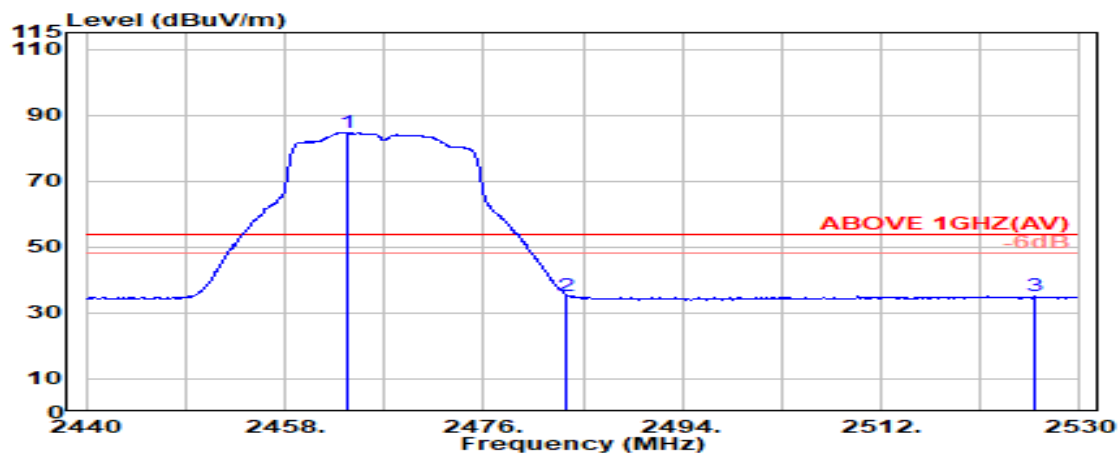

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.564	28.33	5.81	39.87	90.30	84.56	---	---	Average
2483.500	28.37	5.83	39.87	40.94	35.27	54.00	18.73	Average
2525.909	28.56	5.88	39.88	40.45	35.01	54.00	18.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

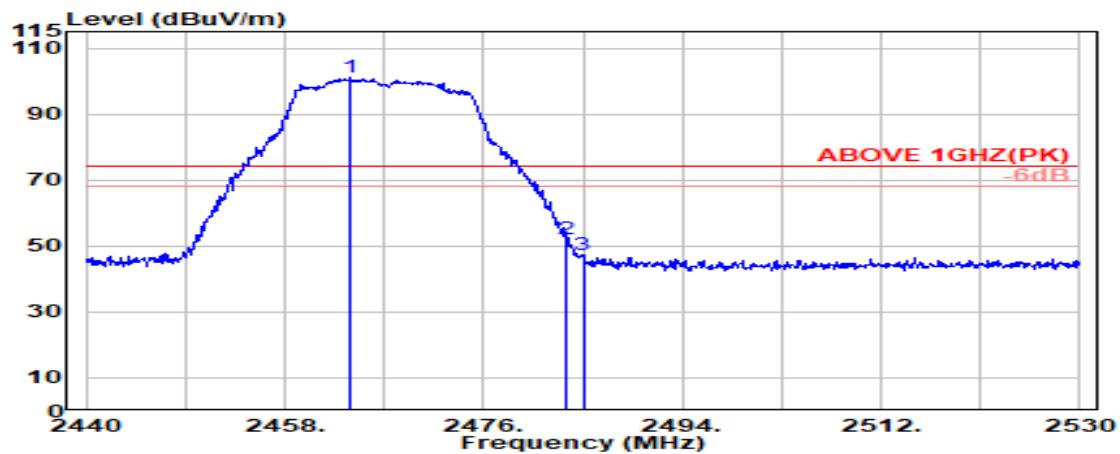

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.891	28.33	5.81	39.87	106.77	101.04	---	---	Peak
2483.500	28.37	5.83	39.87	57.66	51.98	74.00	22.02	Peak
2485.000	28.37	5.83	39.87	53.00	47.33	74.00	26.67	Peak

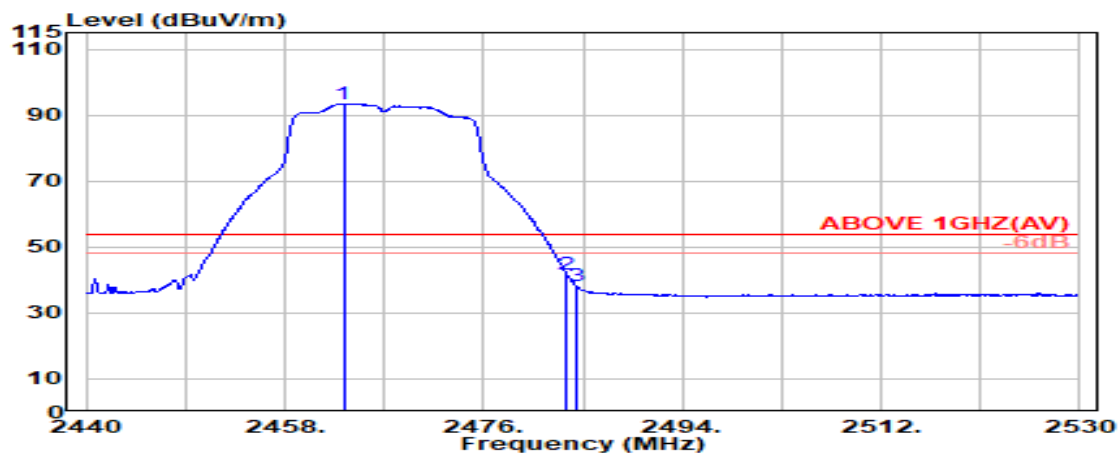

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.318	28.33	5.81	39.87	99.18	93.44	---	---	Average
2483.500	28.37	5.83	39.87	47.48	41.80	54.00	12.20	Average
2484.509	28.37	5.83	39.87	43.71	38.04	54.00	15.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

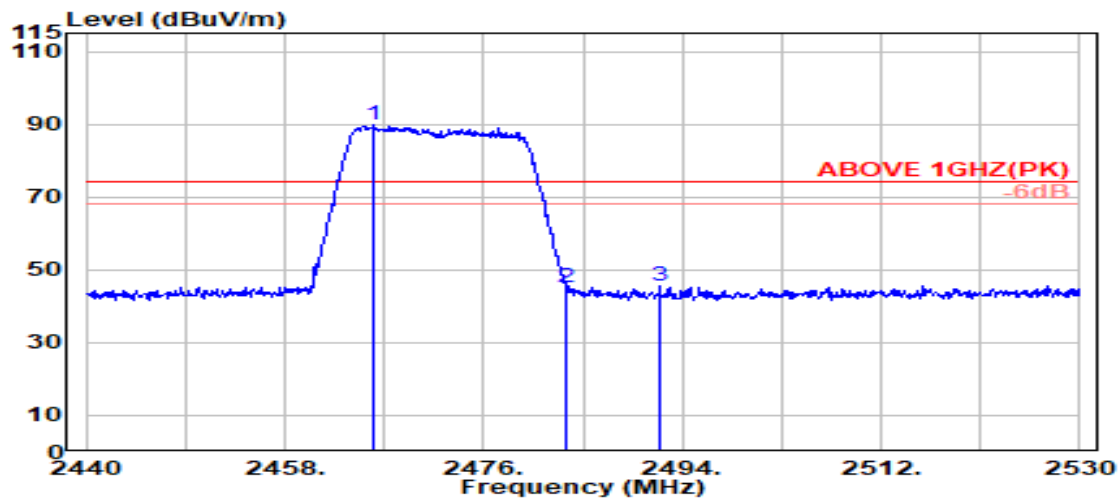

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.100	28.33	5.81	39.87	95.57	89.84	---	---	Peak
	2483.500	28.37	5.83	39.87	50.61	44.93	74.00	29.07	Peak
	2491.955	28.38	5.84	39.87	51.33	45.68	74.00	28.32	Peak

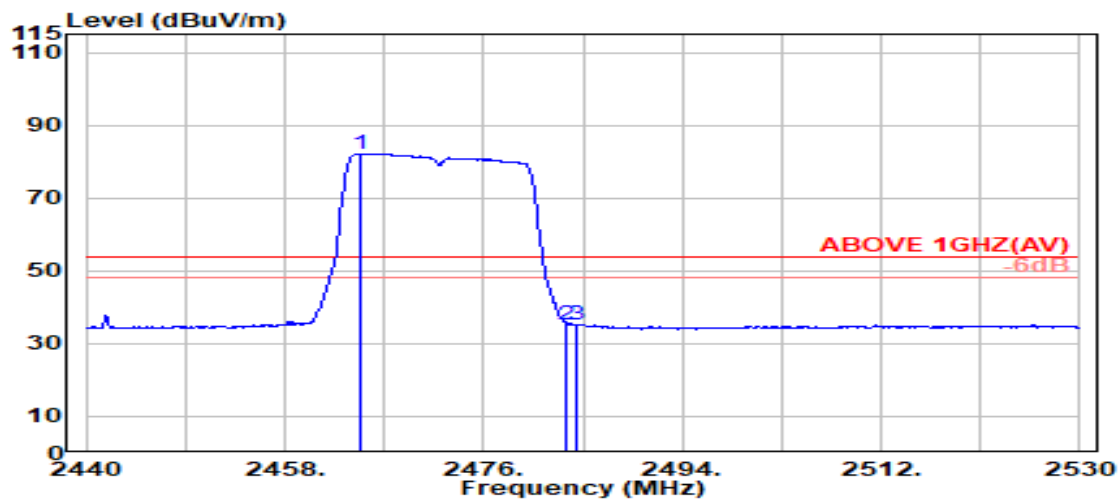

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.791	28.33	5.81	39.87	87.92	82.19	---	---	Average
	2483.500	28.37	5.83	39.87	41.03	35.36	54.00	18.64	Average
	2484.509	28.37	5.83	39.87	40.94	35.27	54.00	18.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

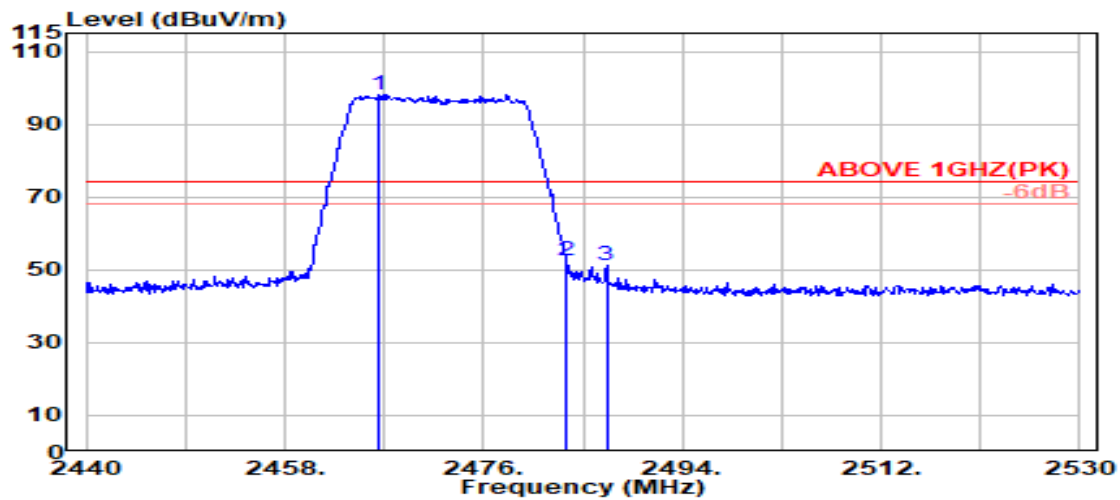

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.591	28.33	5.81	39.87	103.81	98.09	---	---	Peak
2483.500	28.37	5.83	39.87	58.11	52.43	74.00	21.57	Peak
2487.127	28.37	5.84	39.87	56.86	51.20	74.00	22.80	Peak

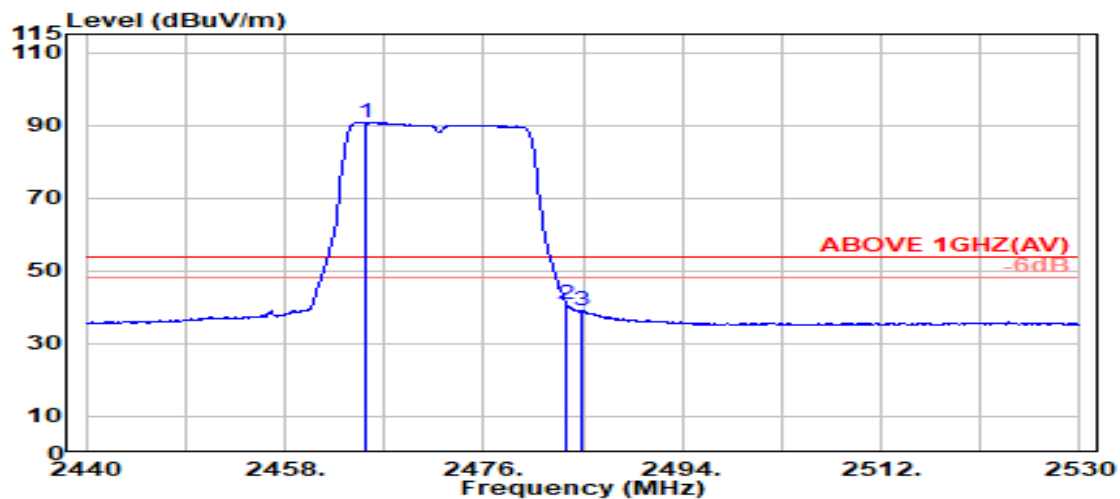

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.282	28.33	5.81	39.87	96.48	90.75	---	---	Average
2483.500	28.37	5.83	39.87	46.68	41.00	54.00	13.00	Average
2484.918	28.37	5.83	39.87	44.78	39.11	54.00	14.89	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

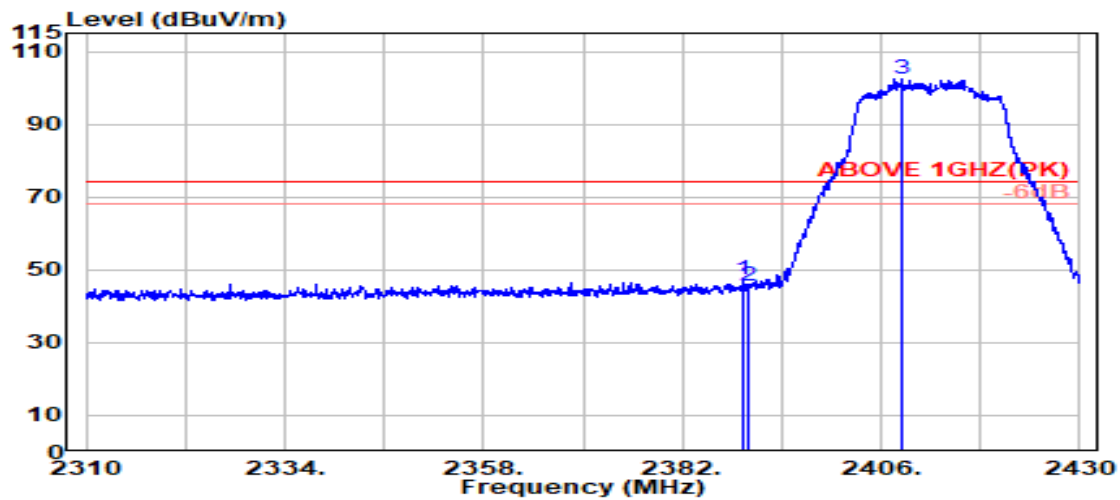

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.267	28.14	5.72	39.88	53.46	47.45	74.00	26.55	Peak
2390.000	28.14	5.72	39.88	51.52	45.51	74.00	28.49	Peak
@ 2408.467	28.13	5.74	39.88	108.25	102.25	---	---	Peak

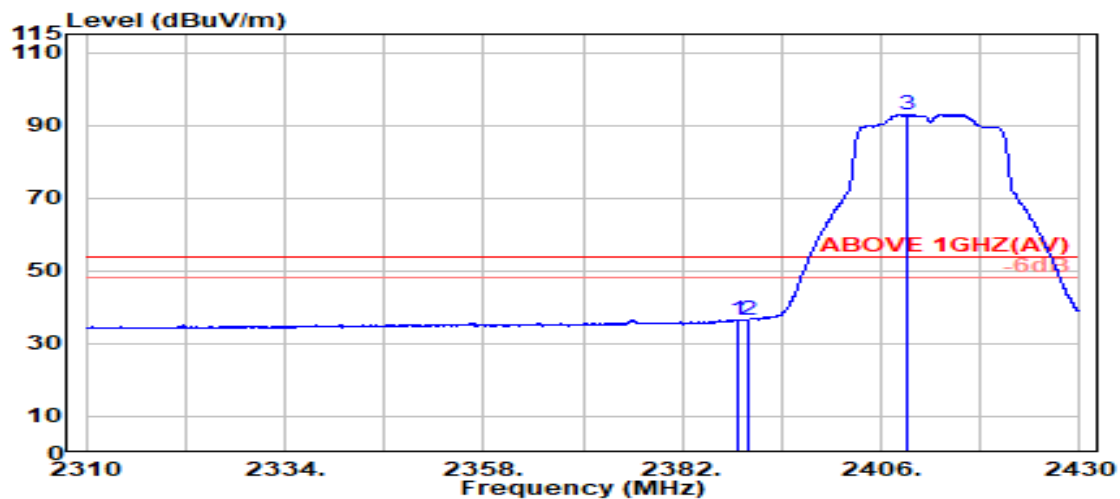

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.14	5.72	39.88	42.68	36.67	54.00	17.33	Average
2390.000	28.14	5.72	39.88	42.66	36.65	54.00	17.35	Average
@ 2409.133	28.14	5.74	39.88	98.94	92.95	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

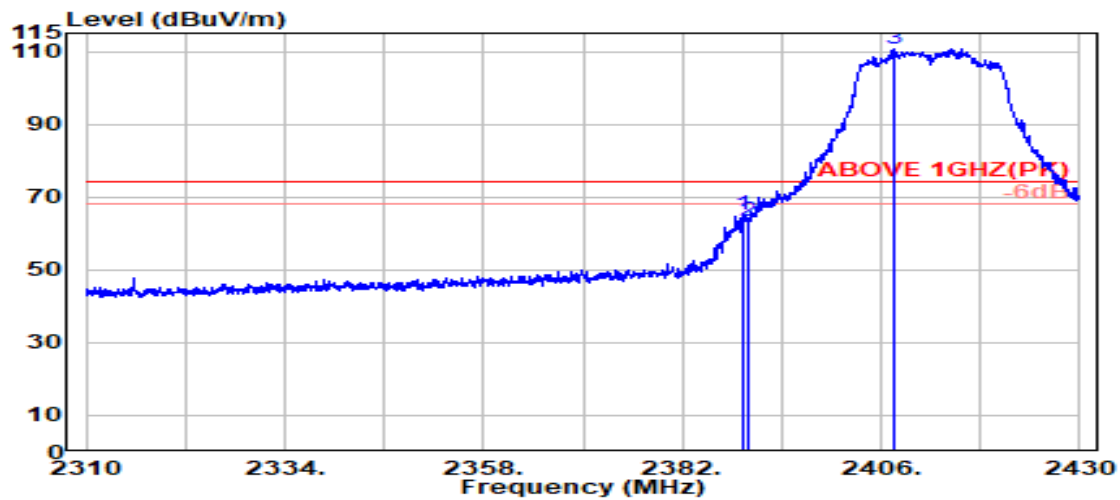

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	71.28	65.27	74.00	8.73	Peak
2390.000	28.14	5.72	39.88	69.53	63.51	74.00	10.49	Peak
@ 2407.600	28.13	5.74	39.88	116.83	110.82	---	---	Peak

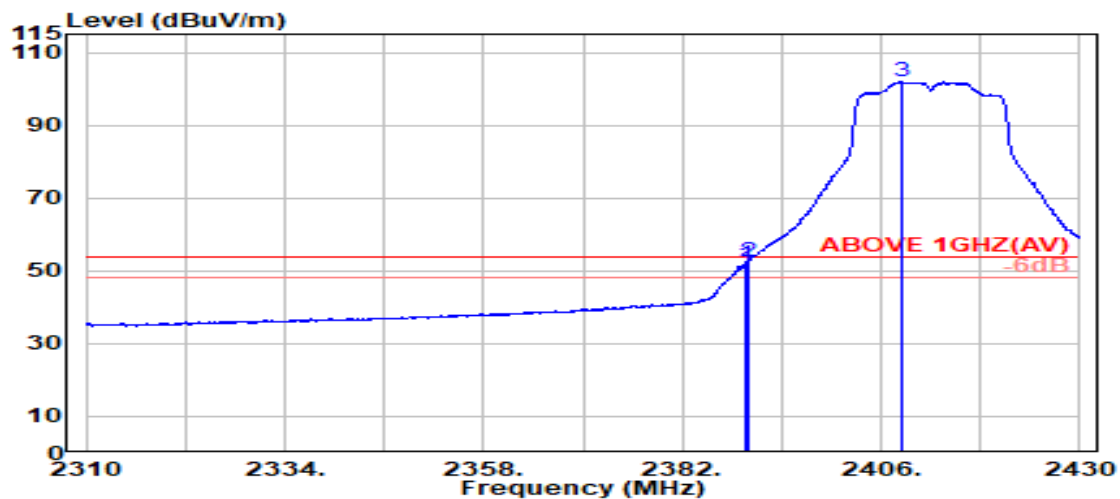


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	57.75	51.73	54.00	2.27	Average
2390.000	28.14	5.72	39.88	58.50	52.48	54.00	1.52	Average
@ 2408.600	28.13	5.74	39.88	107.95	101.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

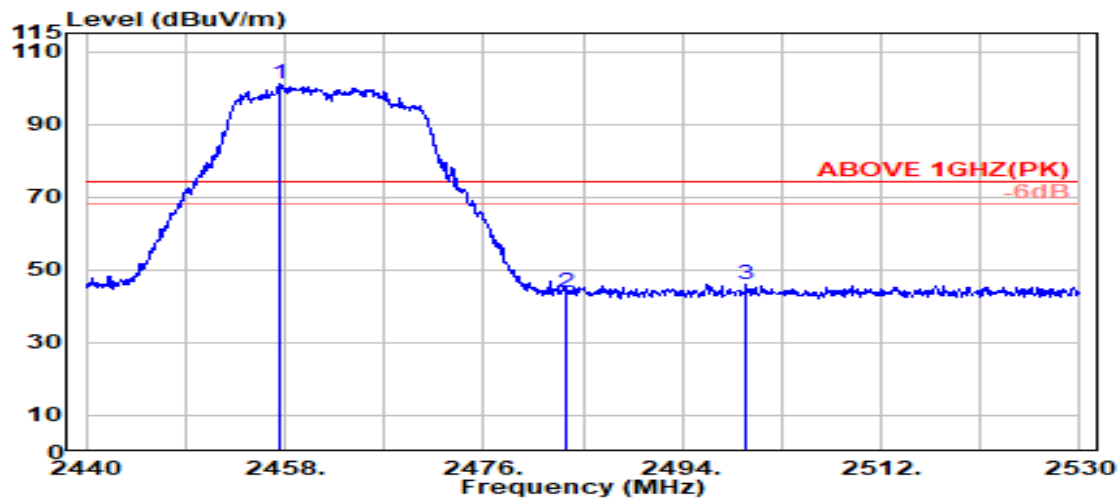

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.509	28.32	5.80	39.87	106.78	101.02	---	---	Peak
2483.500	28.37	5.83	39.87	49.67	43.99	74.00	30.01	Peak
2499.727	28.40	5.85	39.87	51.50	45.88	74.00	28.12	Peak

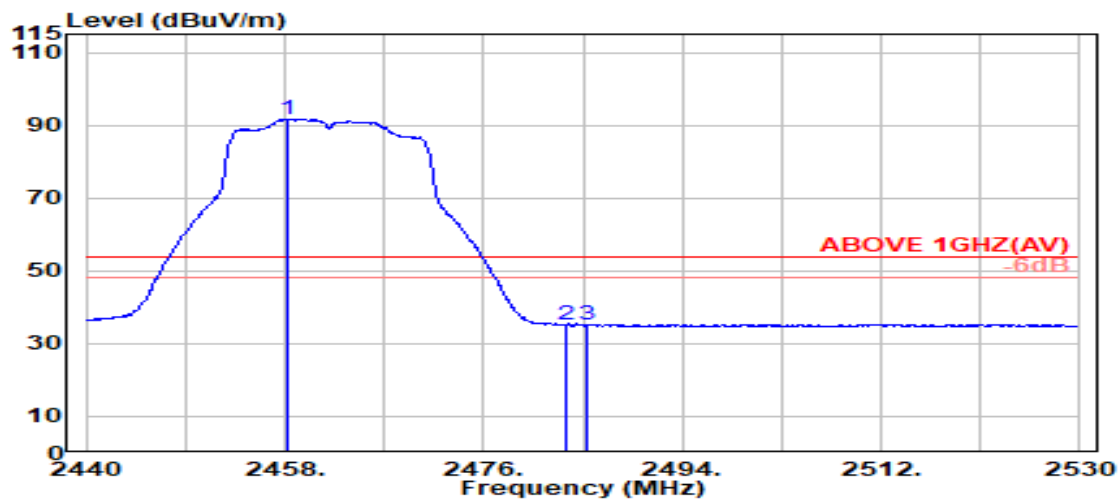

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.164	28.32	5.80	39.87	97.53	91.77	---	---	Average
2483.500	28.37	5.83	39.87	40.88	35.20	54.00	18.80	Average
2485.327	28.37	5.83	39.87	41.01	35.35	54.00	18.65	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

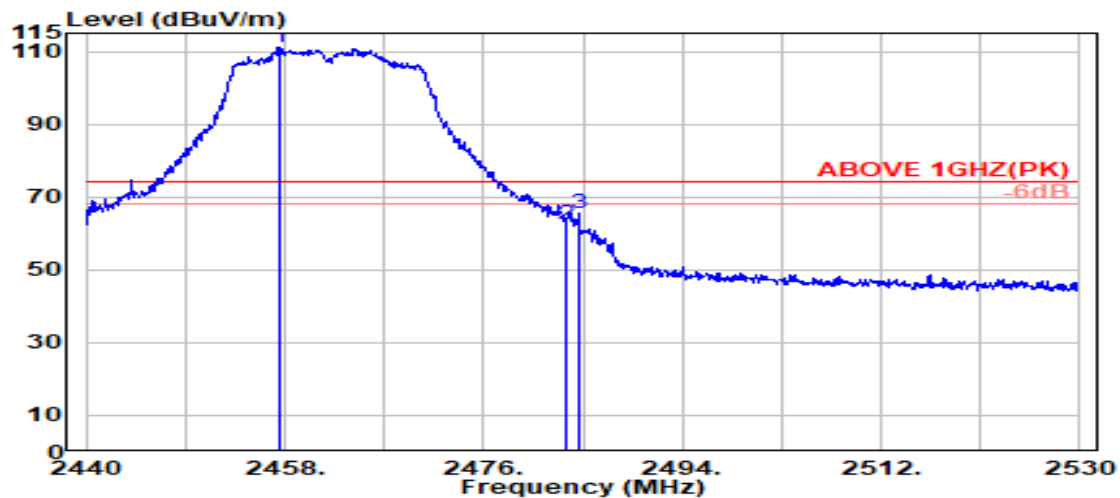

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.591	28.32	5.80	39.87	116.90	111.14	---	---	Peak
2483.500	28.37	5.83	39.87	68.05	62.37	74.00	11.63	Peak
2484.591	28.37	5.83	39.87	71.26	65.59	74.00	8.41	Peak

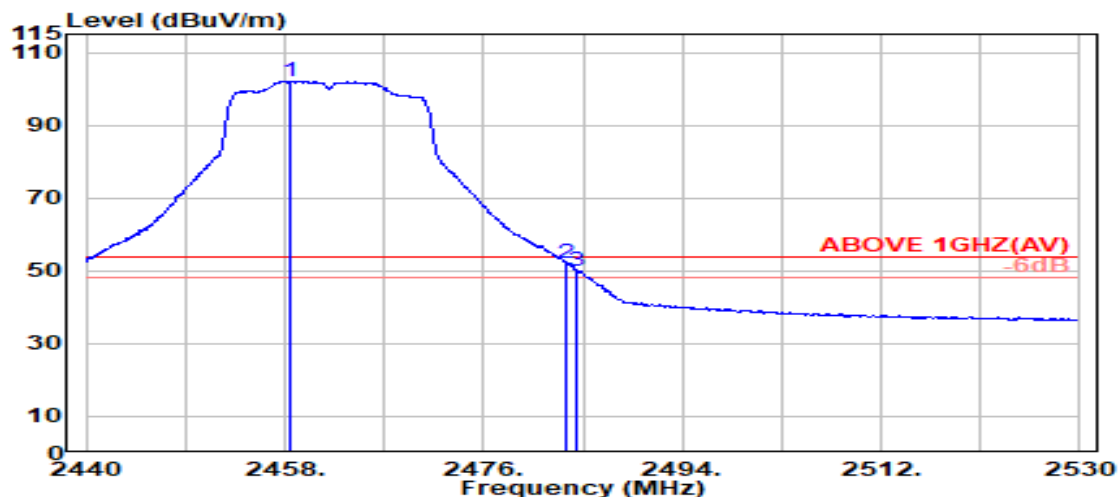

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.409	28.32	5.80	39.87	107.85	102.10	---	---	Average
2483.500	28.37	5.83	39.87	57.71	52.04	54.00	1.96	Average
2484.509	28.37	5.83	39.87	55.56	49.89	54.00	4.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

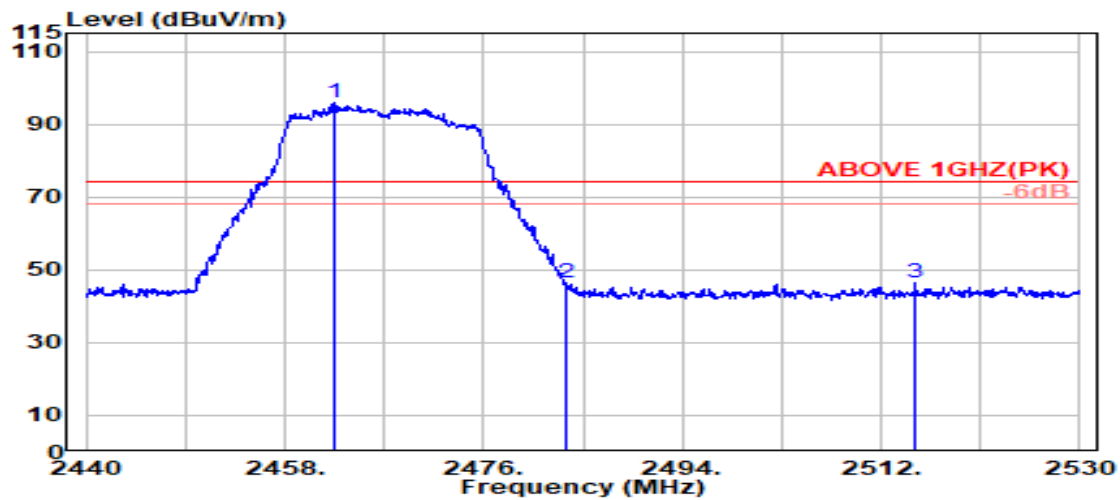

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.418	28.33	5.81	39.87	101.55	95.81	---	---	Peak
2483.500	28.37	5.83	39.87	52.28	46.61	74.00	27.39	Peak
2515.109	28.49	5.87	39.87	52.10	46.59	74.00	27.41	Peak

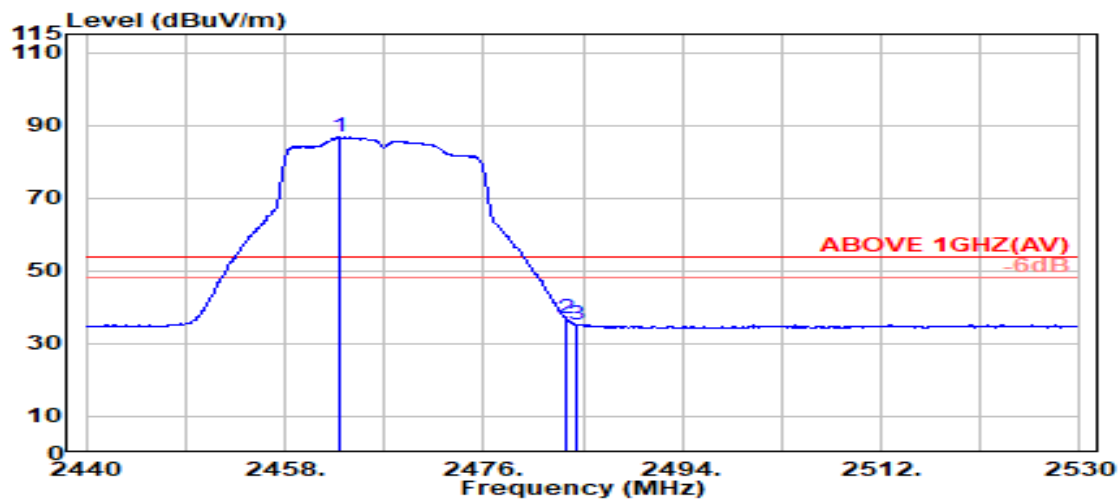

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.909	28.33	5.81	39.87	92.43	86.69	---	---	Average
2483.500	28.37	5.83	39.87	42.56	36.89	54.00	17.11	Average
2484.509	28.37	5.83	39.87	40.92	35.25	54.00	18.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

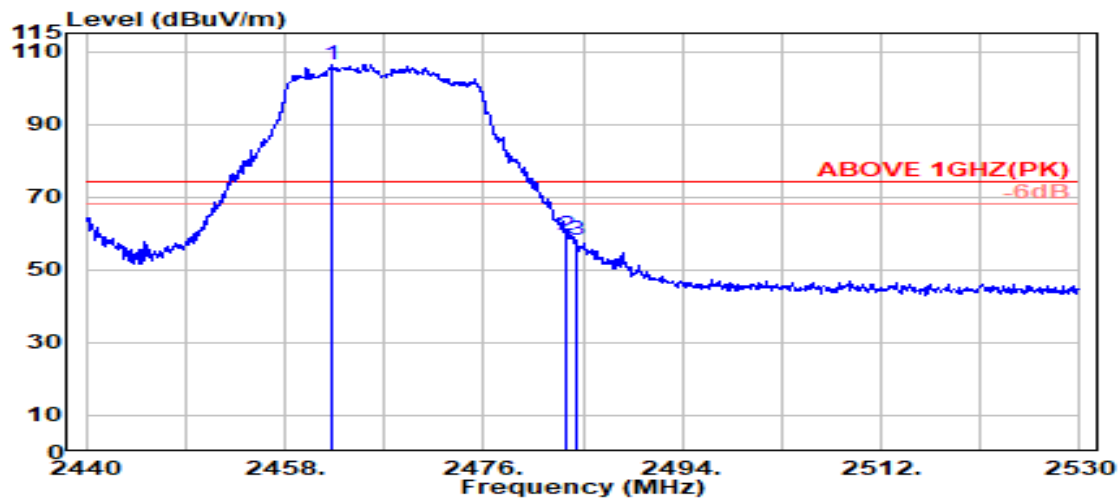

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.336	28.32	5.81	39.87	112.13	106.39	---	---	Peak
2483.500	28.37	5.83	39.87	64.98	59.31	74.00	14.69	Peak
2484.509	28.37	5.83	39.87	64.03	58.36	74.00	15.64	Peak

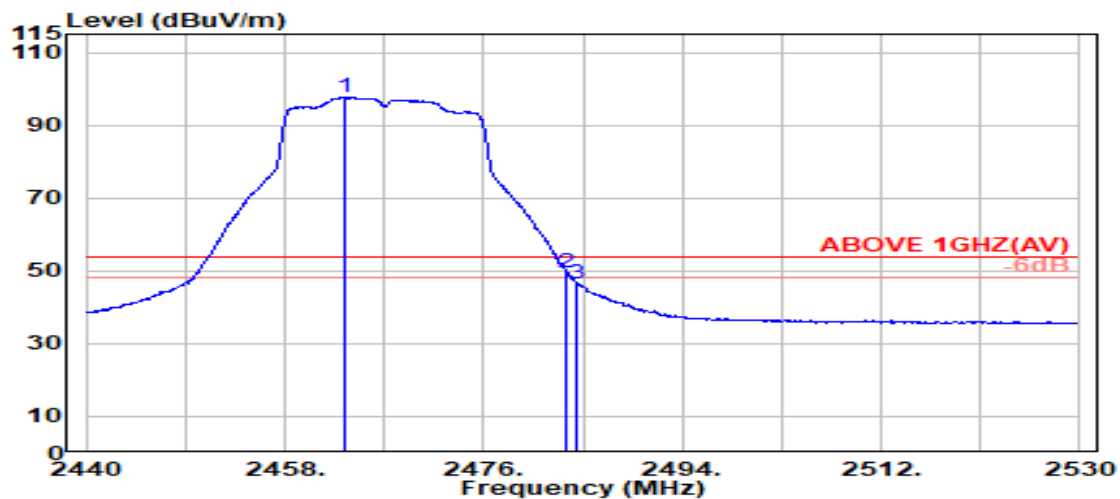

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.33	5.81	39.87	103.46	97.72	---	---	Average
2483.500	28.37	5.83	39.87	55.27	49.60	54.00	4.40	Average
2484.509	28.37	5.83	39.87	52.04	46.37	54.00	7.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

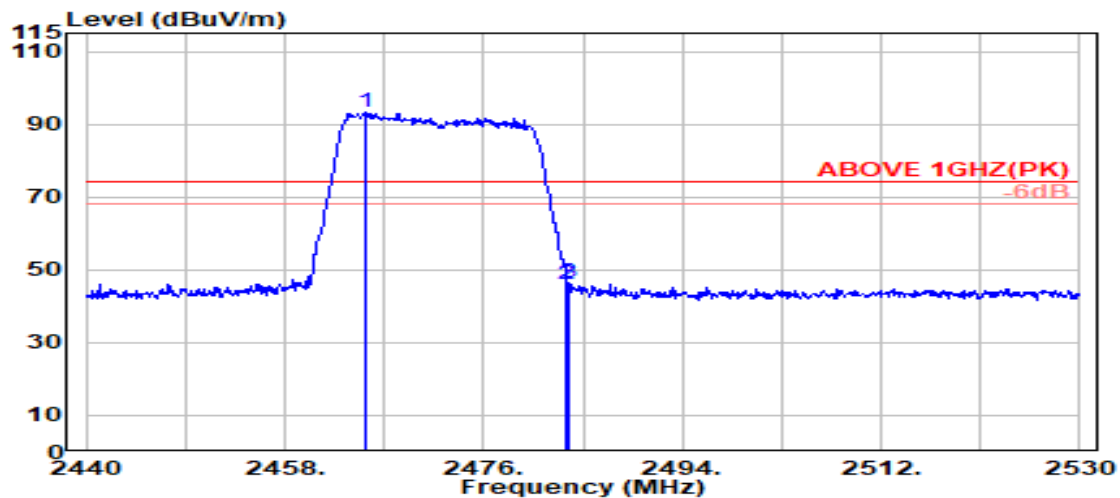

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.282	28.33	5.81	39.87	99.20	93.47	---	---	Peak
2483.500	28.37	5.83	39.87	51.48	45.81	74.00	28.19	Peak
2483.773	28.37	5.83	39.87	51.90	46.23	74.00	27.77	Peak

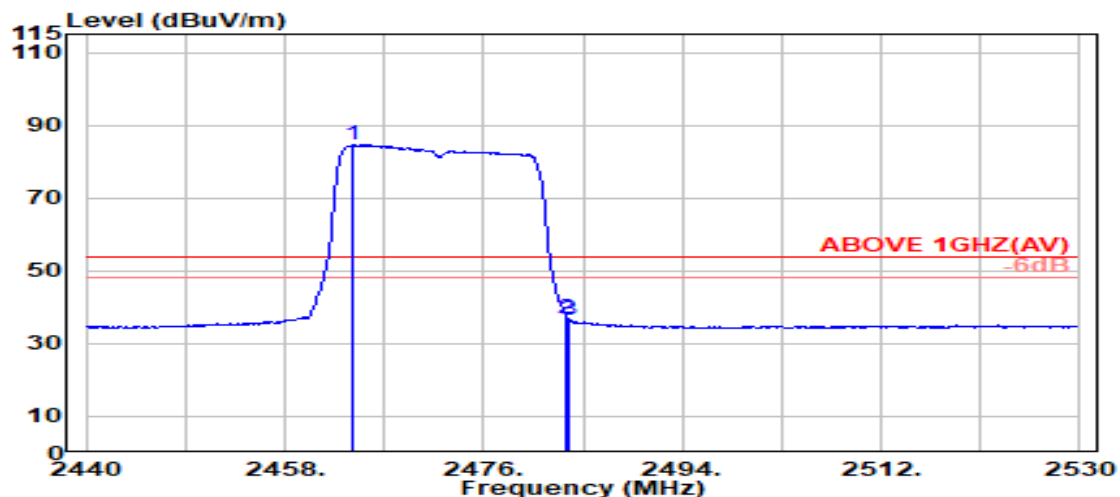

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.218	28.33	5.81	39.87	90.33	84.60	---	---	Average
2483.500	28.37	5.83	39.87	42.69	37.02	54.00	16.98	Average
2483.691	28.37	5.83	39.87	42.10	36.42	54.00	17.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

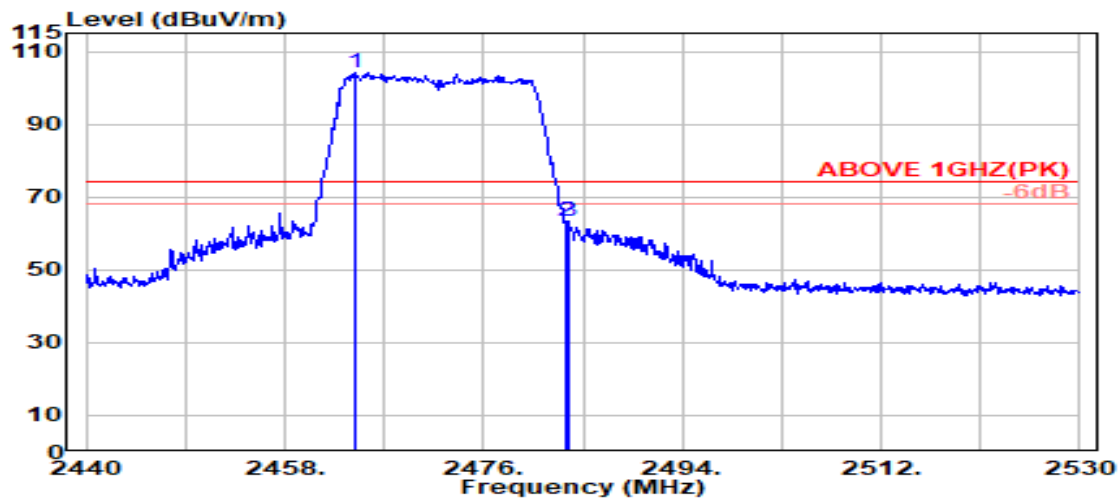

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.33	5.81	39.87	109.74	104.00	---	---	Peak
2483.500	28.37	5.83	39.87	68.94	63.27	74.00	10.73	Peak
2483.691	28.37	5.83	39.87	69.14	63.47	74.00	10.53	Peak

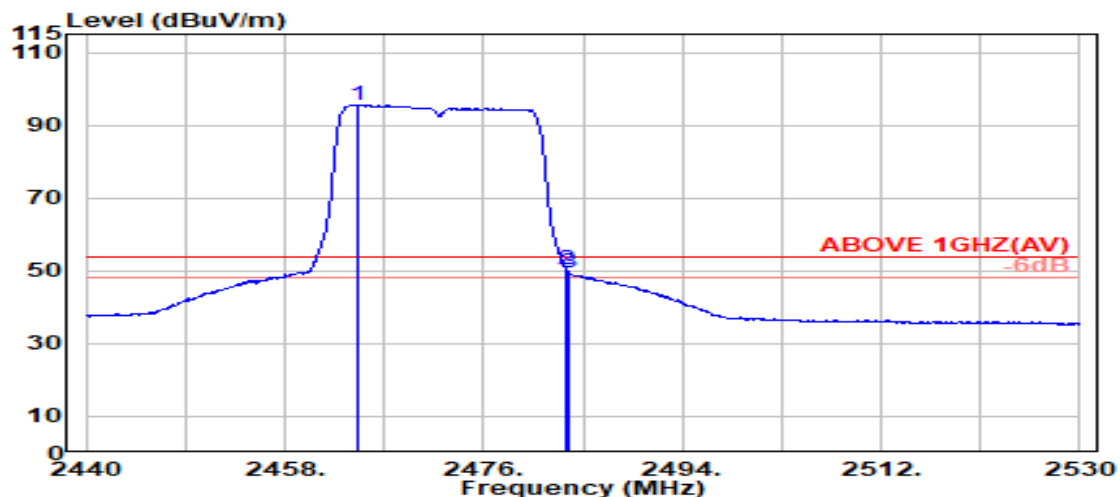

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.627	28.33	5.81	39.87	101.39	95.66	---	---	Average
2483.500	28.37	5.83	39.87	56.07	50.40	54.00	3.60	Average
2483.691	28.37	5.83	39.87	55.22	49.55	54.00	4.45	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

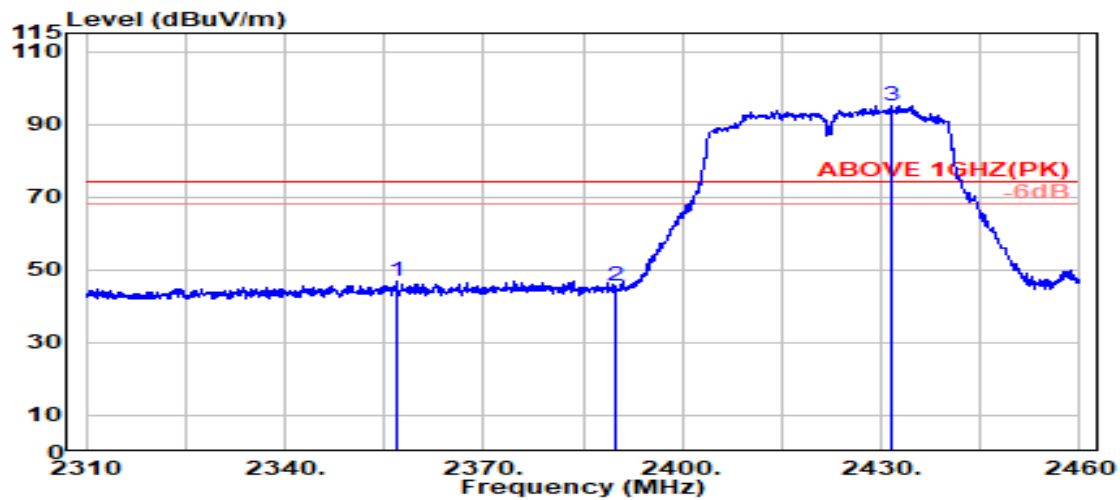

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2356.917	28.27	5.68	39.88	52.92	47.00	74.00	27.00	Peak
2390.000	28.14	5.72	39.88	51.59	45.57	74.00	28.43	Peak
@ 2431.667	28.23	5.77	39.87	100.97	95.09	---	---	Peak

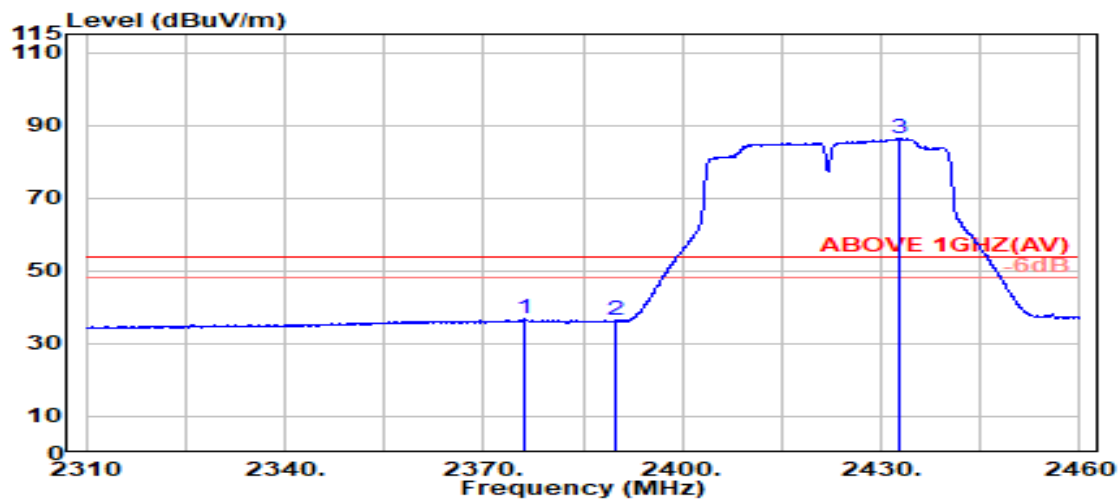

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2376.250	28.19	5.70	39.88	42.77	36.79	54.00	17.21	Average
2390.000	28.14	5.72	39.88	42.26	36.24	54.00	17.76	Average
@ 2432.750	28.23	5.77	39.87	92.20	86.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

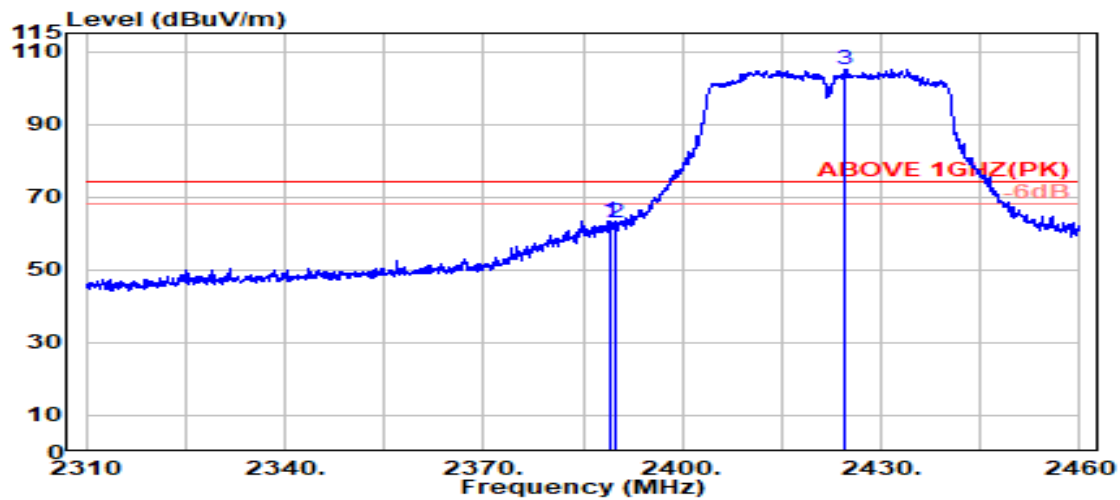

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	69.42	63.41	74.00	10.59	Peak
2390.000	28.14	5.72	39.88	69.04	63.02	74.00	10.98	Peak
@ 2424.667	28.20	5.76	39.88	111.05	105.13	---	---	Peak

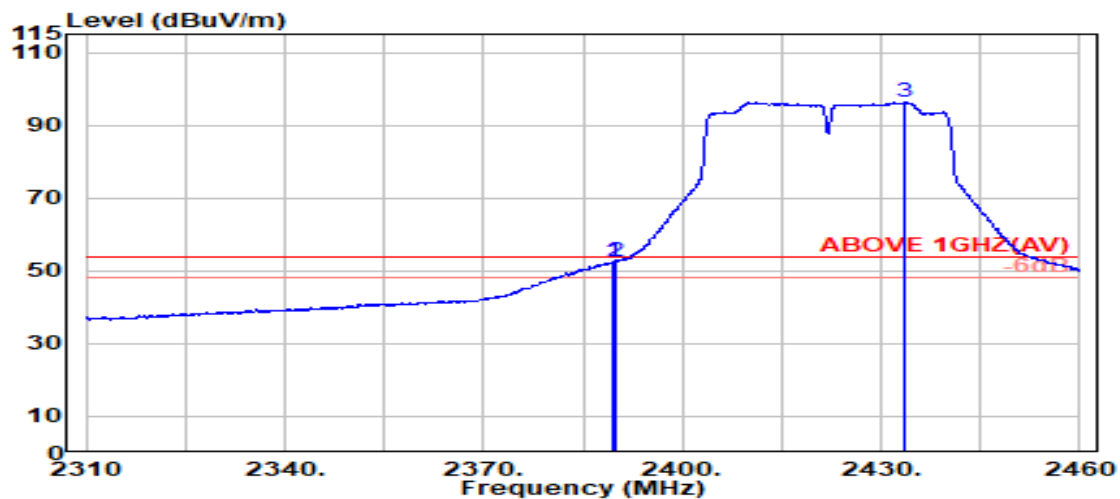

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.667	28.14	5.72	39.88	58.33	52.31	54.00	1.69	Average
2390.000	28.14	5.72	39.88	58.50	52.48	54.00	1.52	Average
@ 2433.667	28.24	5.77	39.87	102.23	96.37	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

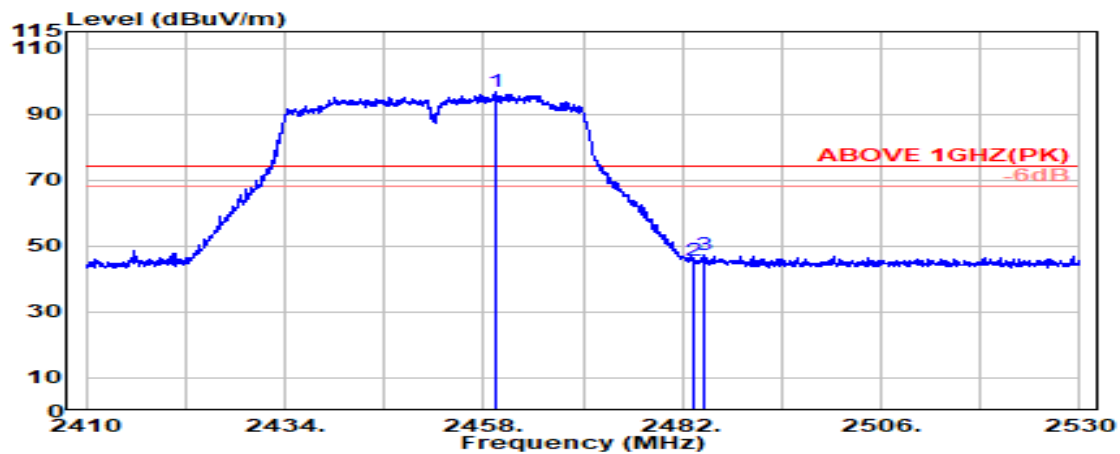

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.550	28.32	5.80	39.87	102.43	96.68	---	---	Peak
2483.500	28.37	5.83	39.87	51.41	45.73	74.00	28.27	Peak
2484.600	28.37	5.83	39.87	53.17	47.50	74.00	26.50	Peak

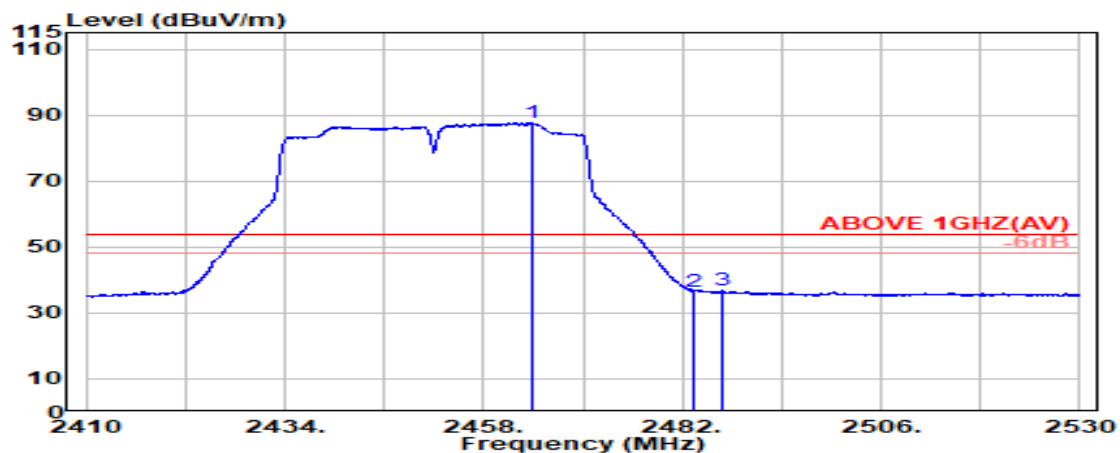


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.850	28.33	5.81	39.87	93.40	87.66	---	---	Average
2483.500	28.37	5.83	39.87	42.34	36.66	54.00	17.34	Average
2486.750	28.37	5.83	39.87	42.66	37.00	54.00	17.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

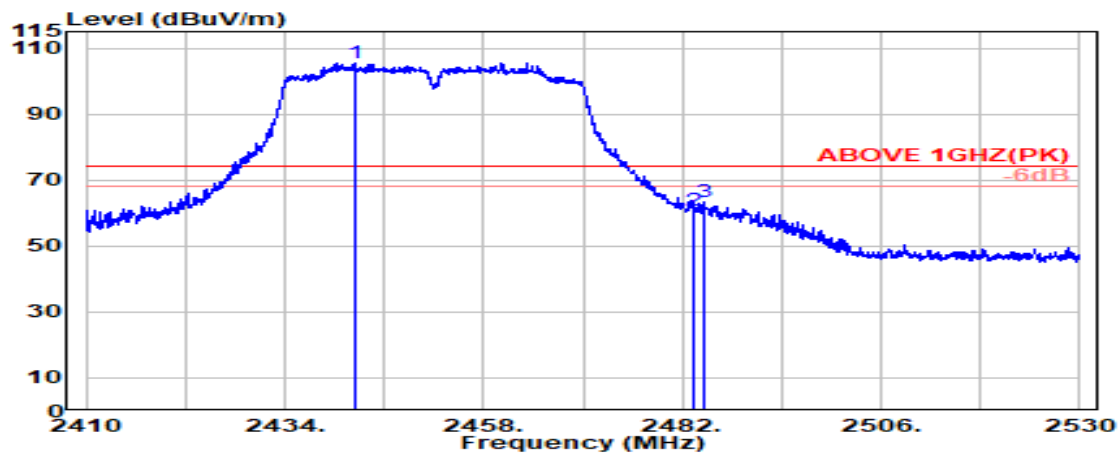

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2442.500	28.27	5.78	39.87	111.34	105.52	---	---	Peak
2483.500	28.37	5.83	39.87	66.51	60.84	74.00	13.16	Peak
2484.600	28.37	5.83	39.87	69.23	63.56	74.00	10.44	Peak

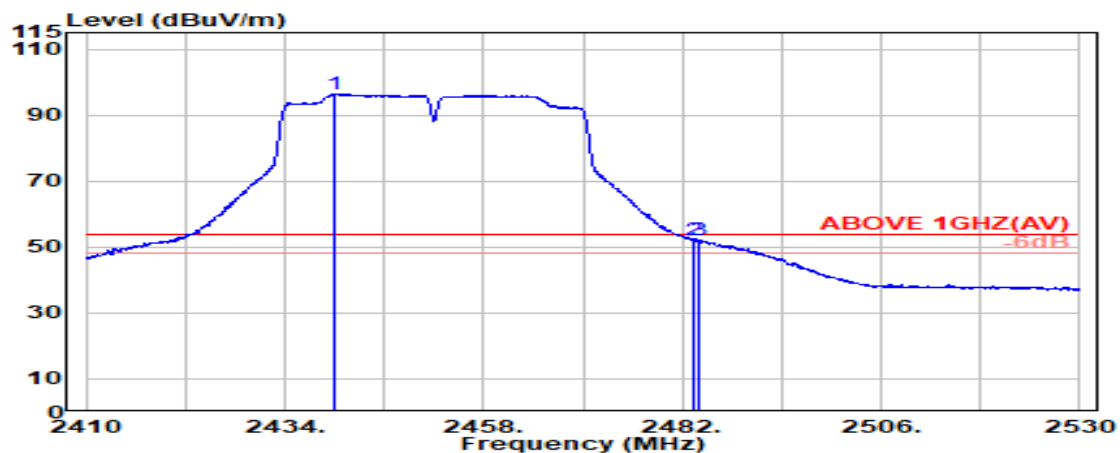

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2439.850	28.26	5.78	39.87	102.28	96.45	---	---	Average
2483.500	28.37	5.83	39.87	57.76	52.09	54.00	1.91	Average
2484.100	28.37	5.83	39.87	57.85	52.18	54.00	1.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

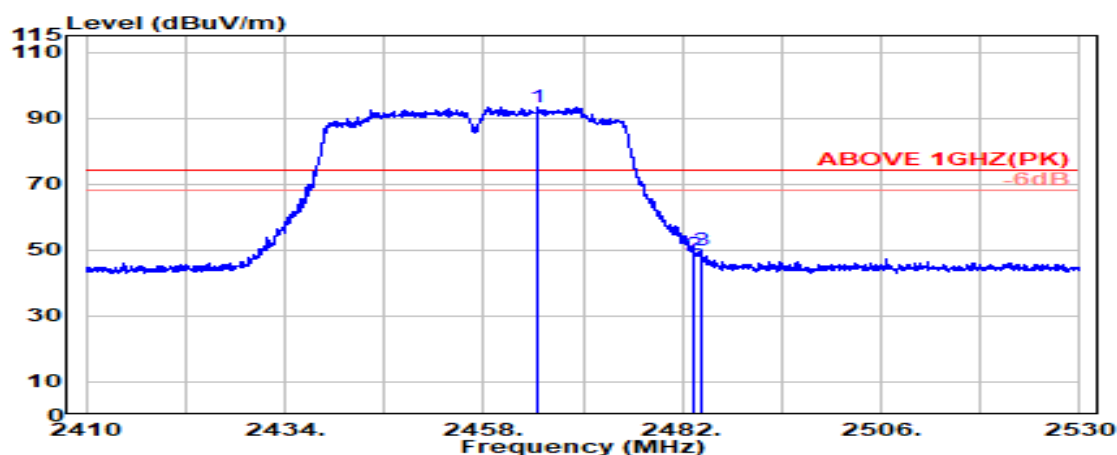

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.33	5.81	39.87	99.11	93.38	---	---	Peak
2483.500	28.37	5.83	39.87	54.49	48.81	74.00	25.19	Peak
2484.300	28.37	5.83	39.87	55.77	50.10	74.00	23.90	Peak

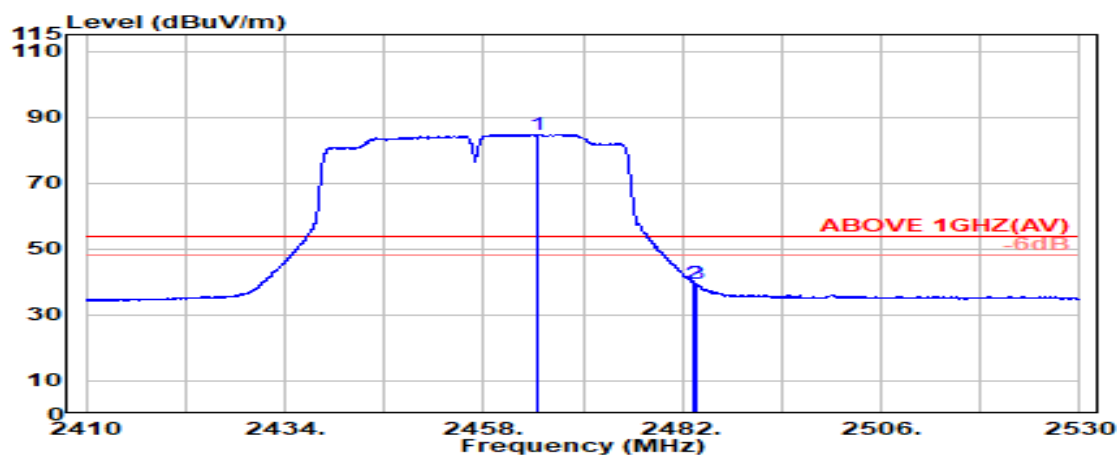

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.33	5.81	39.87	90.57	84.84	---	---	Average
2483.500	28.37	5.83	39.87	44.98	39.31	54.00	14.69	Average
2483.750	28.37	5.83	39.87	45.06	39.38	54.00	14.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

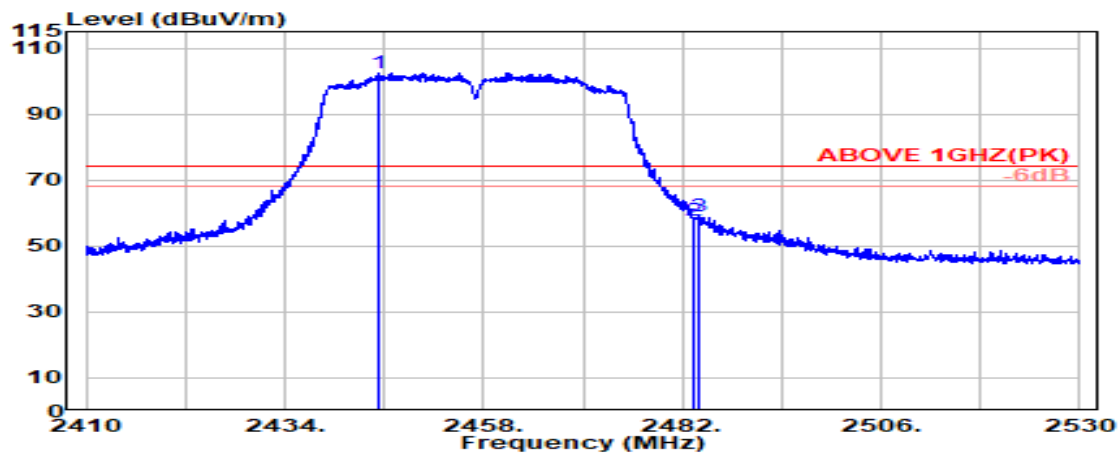

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.250	28.28	5.79	39.87	108.40	102.59	---	---	Peak
2483.500	28.37	5.83	39.87	63.27	57.60	74.00	16.40	Peak
2483.900	28.37	5.83	39.87	64.86	59.19	74.00	14.81	Peak

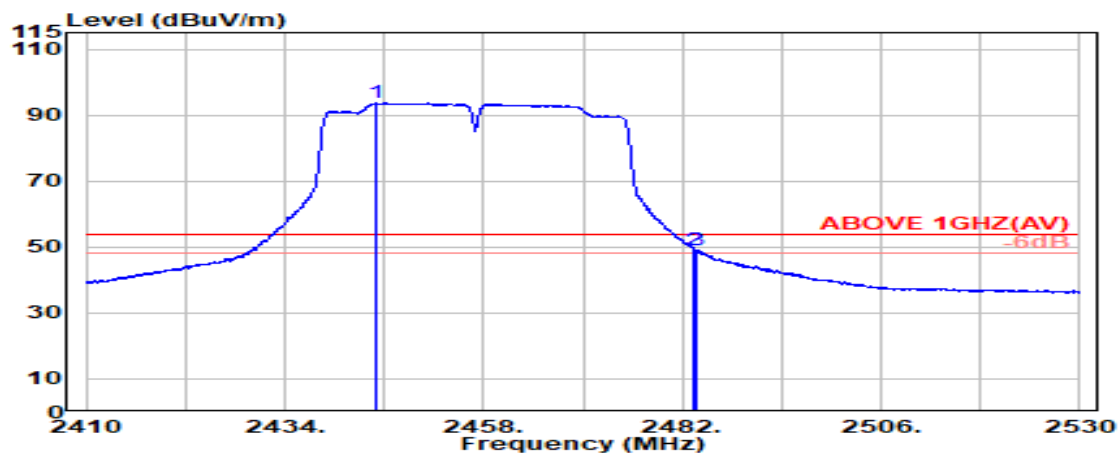

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.000	28.28	5.79	39.87	99.49	93.68	---	---	Average
2483.500	28.37	5.83	39.87	54.86	49.19	54.00	4.81	Average
2483.700	28.37	5.83	39.87	54.66	48.99	54.00	5.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

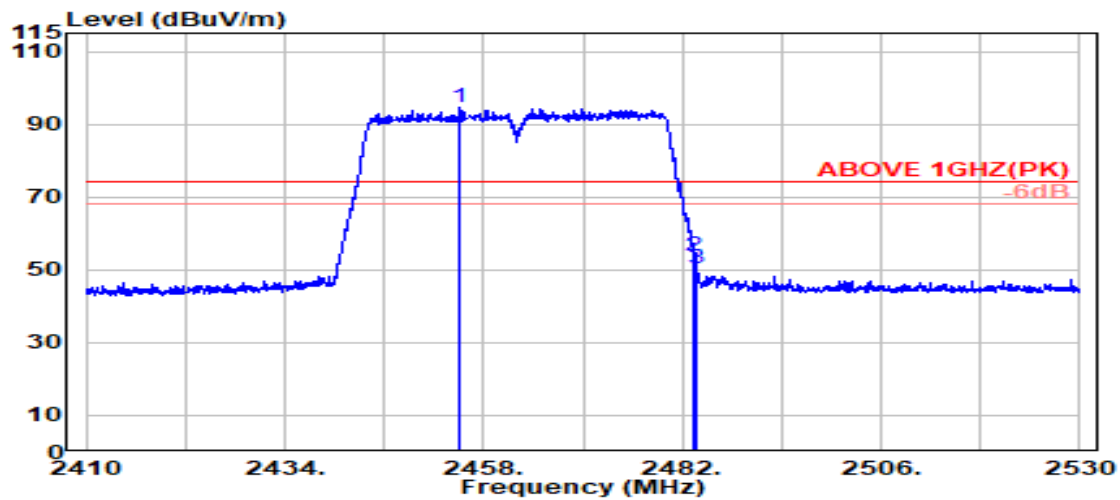

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.200	28.31	5.80	39.87	100.24	94.47	---	---	Peak
2483.500	28.37	5.83	39.87	59.35	53.68	74.00	20.32	Peak
2483.700	28.37	5.83	39.87	55.95	50.28	74.00	23.72	Peak

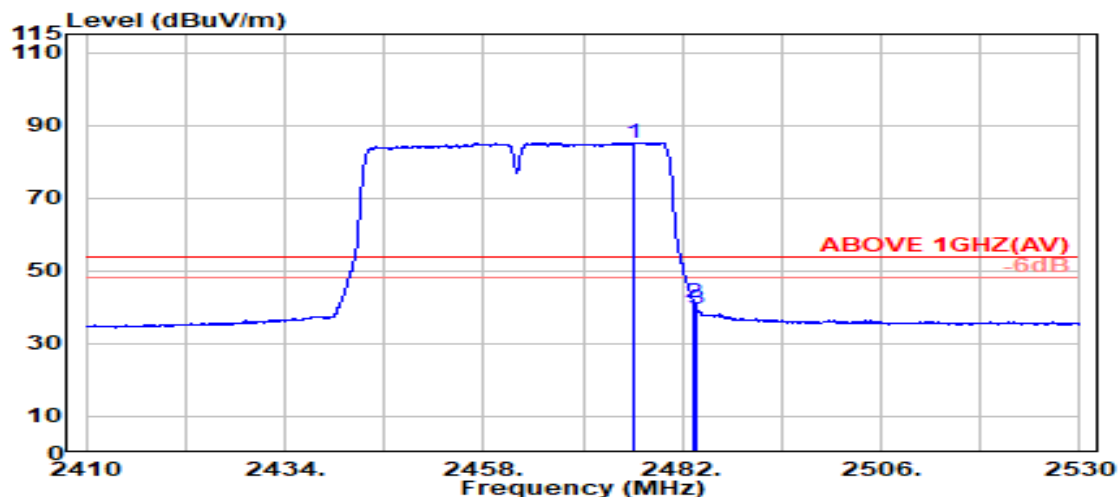

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.150	28.35	5.82	39.87	90.96	85.26	---	---	Average
2483.500	28.37	5.83	39.87	46.77	41.09	54.00	12.91	Average
2483.700	28.37	5.83	39.87	45.32	39.65	54.00	14.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

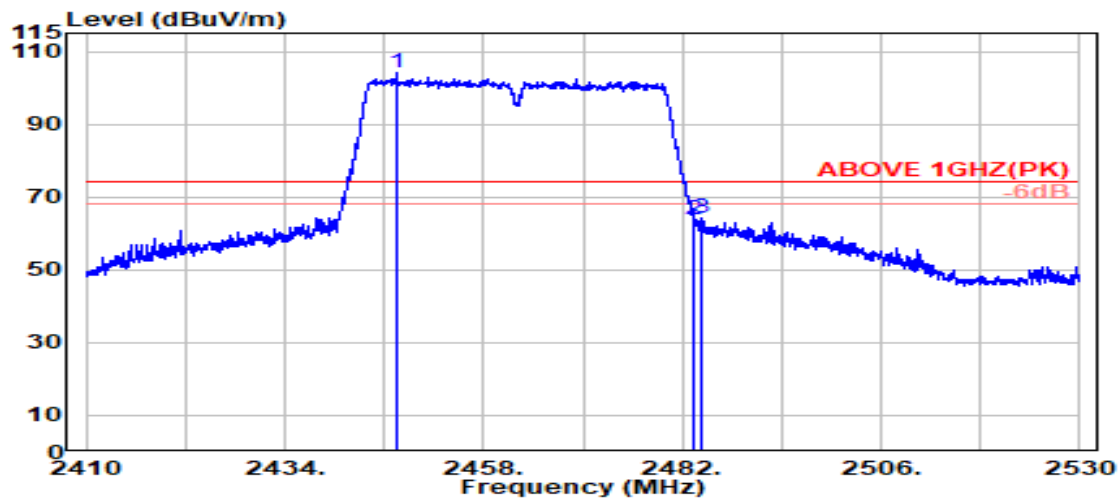

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.450	28.29	5.79	39.87	109.74	103.94	---	---	Peak
2483.500	28.37	5.83	39.87	69.45	63.77	74.00	10.23	Peak
2484.250	28.37	5.83	39.87	69.79	64.12	74.00	9.88	Peak

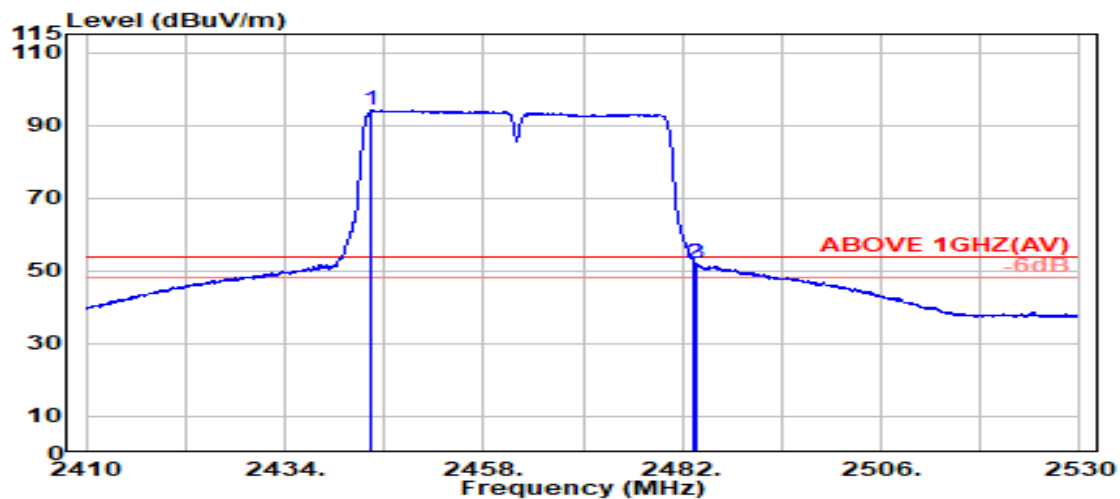

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.450	28.28	5.79	39.87	99.89	94.08	---	---	Average
2483.500	28.37	5.83	39.87	57.71	52.04	54.00	1.96	Average
2483.700	28.37	5.83	39.87	57.64	51.97	54.00	2.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

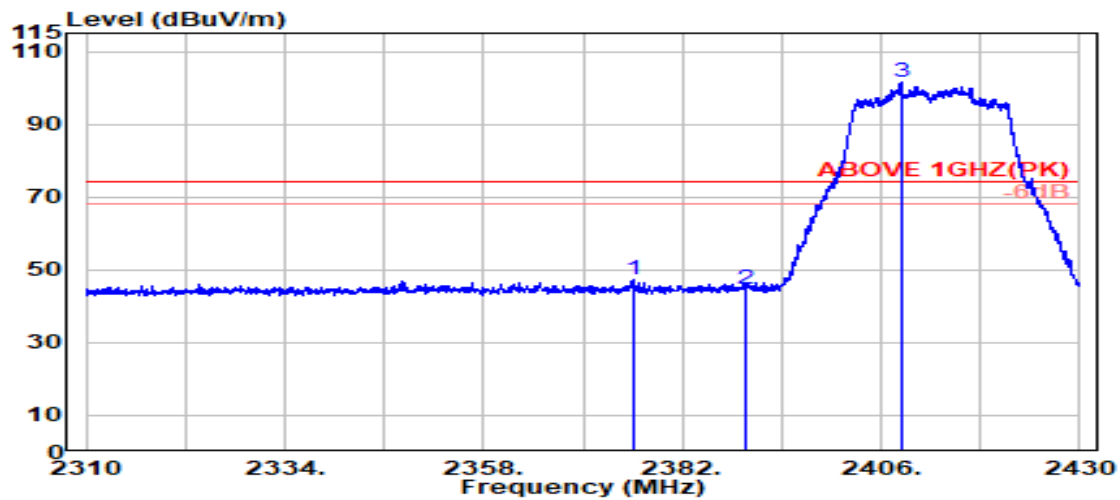

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.70	39.88	53.23	47.25	74.00	26.75	Peak
2389.800	28.14	5.72	39.88	50.58	44.56	74.00	29.44	Peak
@ 2408.400	28.13	5.74	39.88	107.36	101.36	---	---	Peak

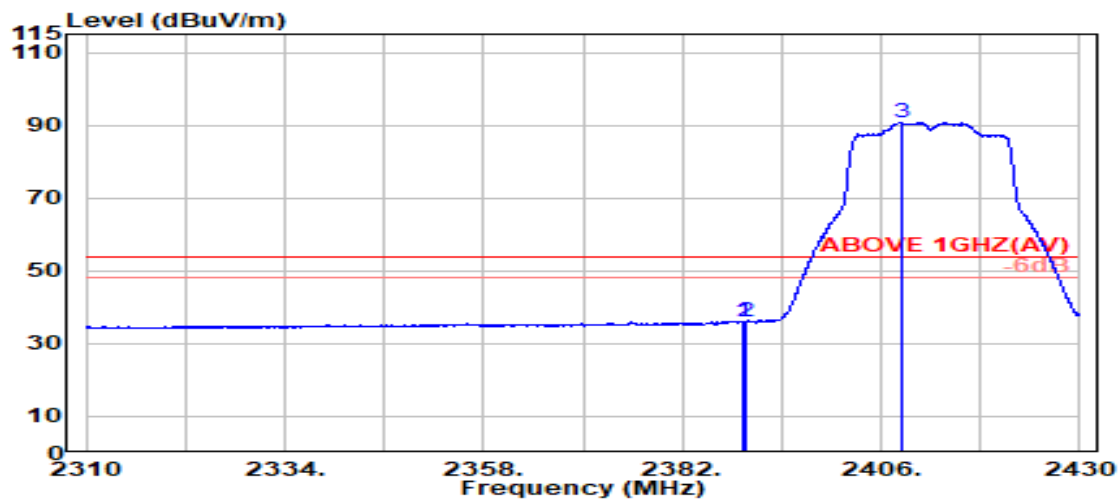

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	42.21	36.19	54.00	17.81	Average
2389.800	28.14	5.72	39.88	42.02	36.00	54.00	18.00	Average
@ 2408.500	28.13	5.74	39.88	96.81	90.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

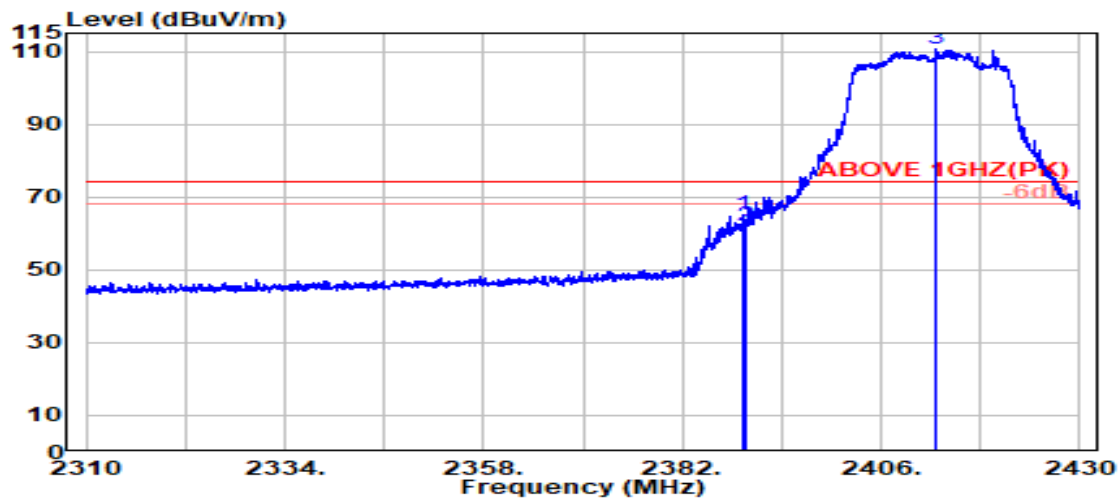

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	70.98	64.96	74.00	9.04	Peak
2389.800	28.14	5.72	39.88	67.89	61.88	74.00	12.12	Peak
@ 2412.700	28.15	5.75	39.88	116.60	110.63	---	---	Peak

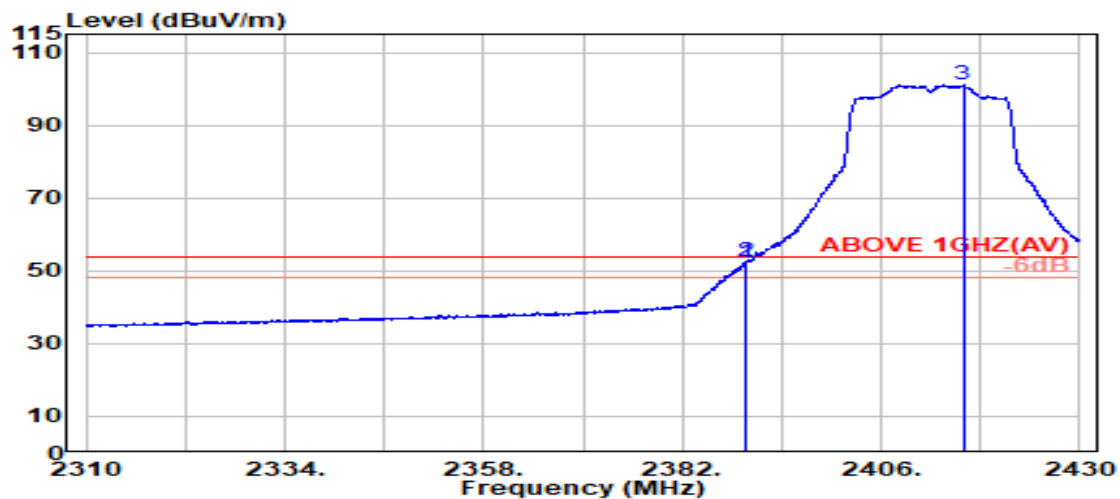

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	58.04	52.02	54.00	1.98	Average
2389.800	28.14	5.72	39.88	58.50	52.48	54.00	1.52	Average
@ 2415.900	28.16	5.75	39.88	106.97	101.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

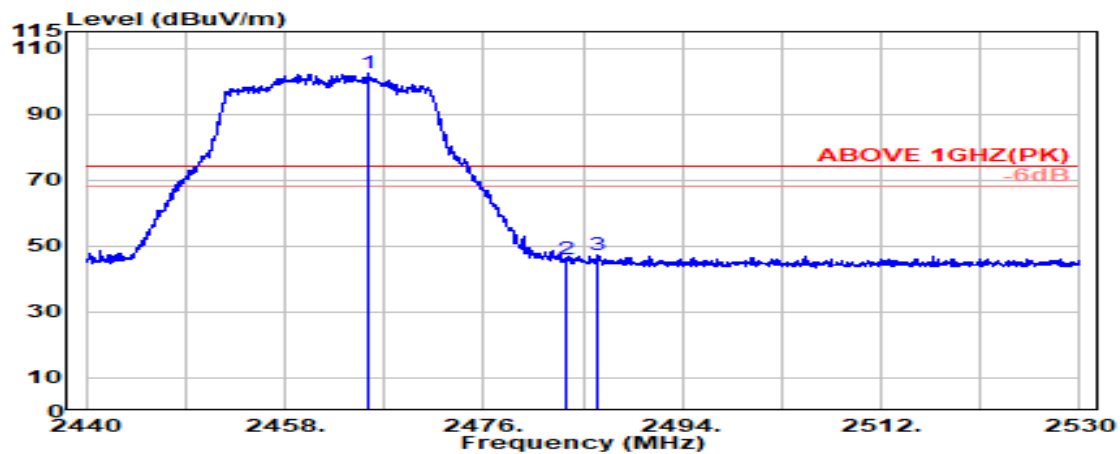

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.33	5.81	39.87	108.29	102.56	---	---	Peak
2483.500	28.37	5.83	39.87	51.54	45.86	74.00	28.14	Peak
2486.400	28.37	5.83	39.87	52.88	47.22	74.00	26.78	Peak

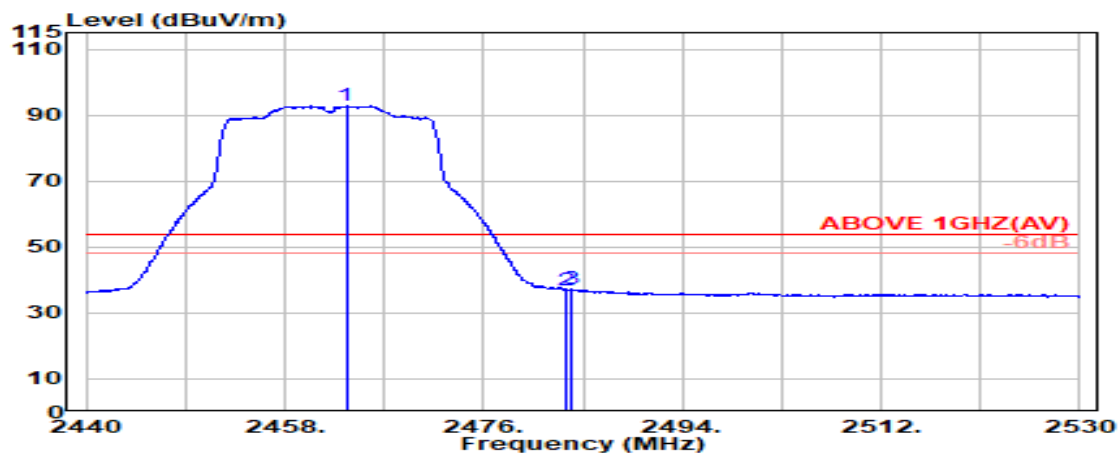

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.550	28.33	5.81	39.87	98.55	92.81	---	---	Average
2483.500	28.37	5.83	39.87	42.71	37.04	54.00	16.96	Average
2484.000	28.37	5.83	39.87	42.80	37.13	54.00	16.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

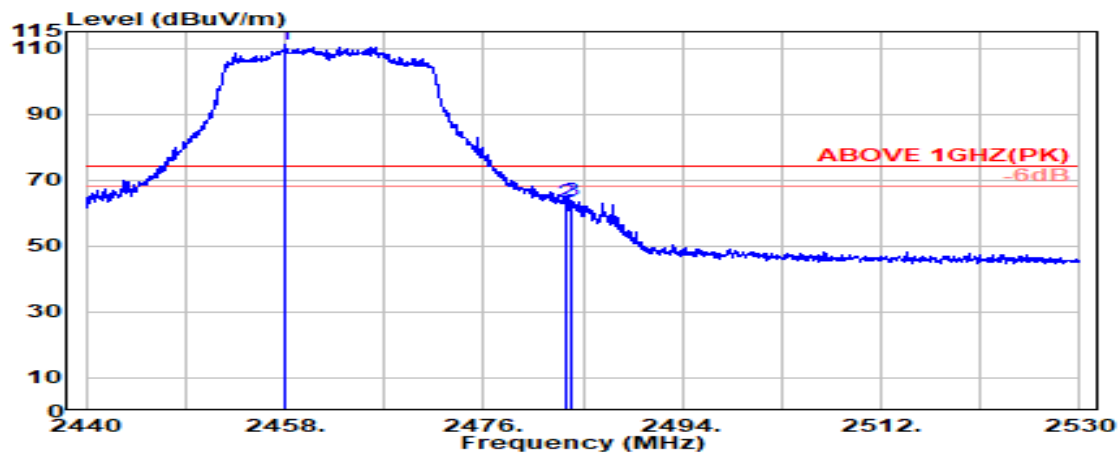

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.050	28.32	5.80	39.87	116.70	110.94	---	---	Peak
2483.500	28.37	5.83	39.87	69.18	63.51	74.00	10.49	Peak
2483.850	28.37	5.83	39.87	69.34	63.67	74.00	10.33	Peak

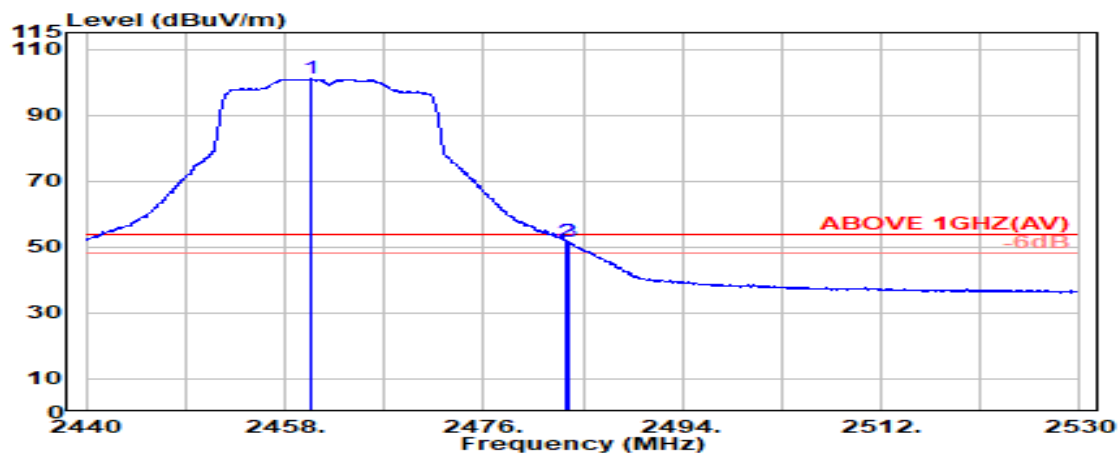

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	28.32	5.80	39.87	106.75	101.00	---	---	Average
2483.500	28.37	5.83	39.87	57.36	51.69	54.00	2.31	Average
2483.700	28.37	5.83	39.87	57.28	51.60	54.00	2.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

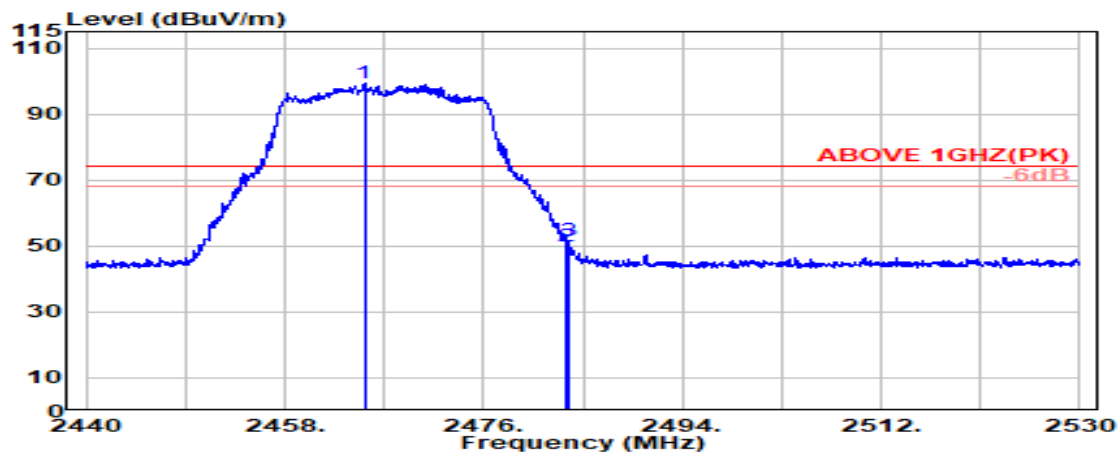

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	28.33	5.81	39.87	105.11	99.37	---	---	Peak
2483.500	28.37	5.83	39.87	55.78	50.11	74.00	23.89	Peak
2483.750	28.37	5.83	39.87	57.23	51.55	74.00	22.45	Peak

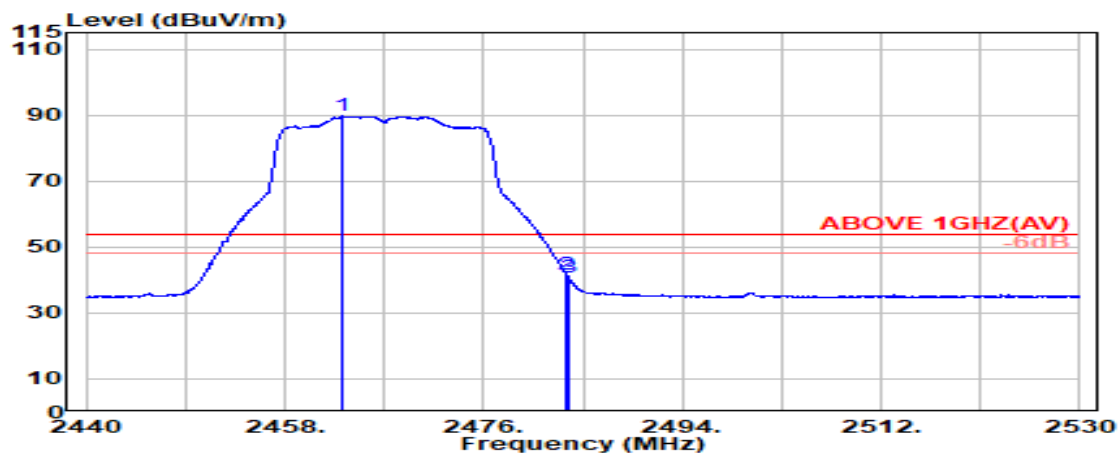


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.150	28.33	5.81	39.87	95.42	89.68	---	---	Average
2483.500	28.37	5.83	39.87	47.31	41.64	54.00	12.36	Average
2483.700	28.37	5.83	39.87	46.32	40.64	54.00	13.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

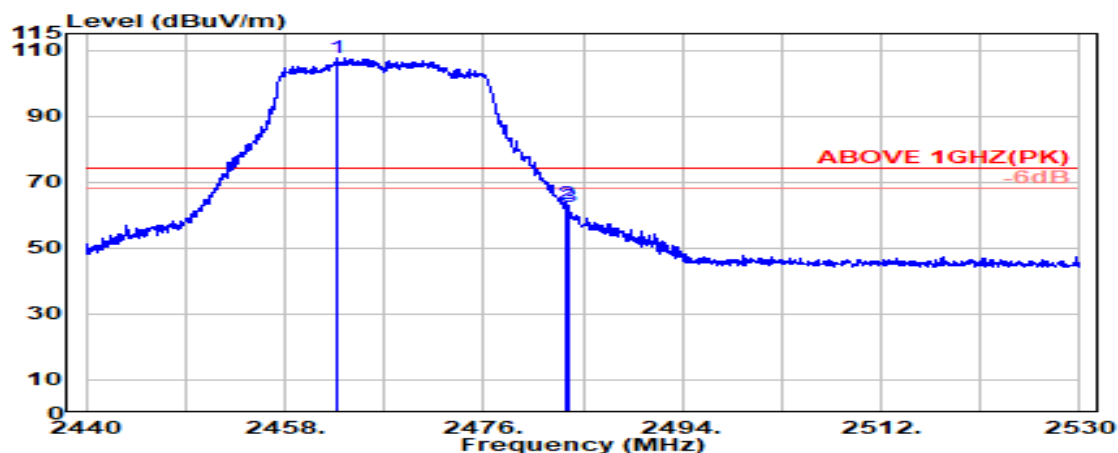

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.700	28.33	5.81	39.87	113.49	107.75	---	---	Peak
2483.500	28.37	5.83	39.87	68.99	63.32	74.00	10.68	Peak
2483.700	28.37	5.83	39.87	68.24	62.56	74.00	11.44	Peak

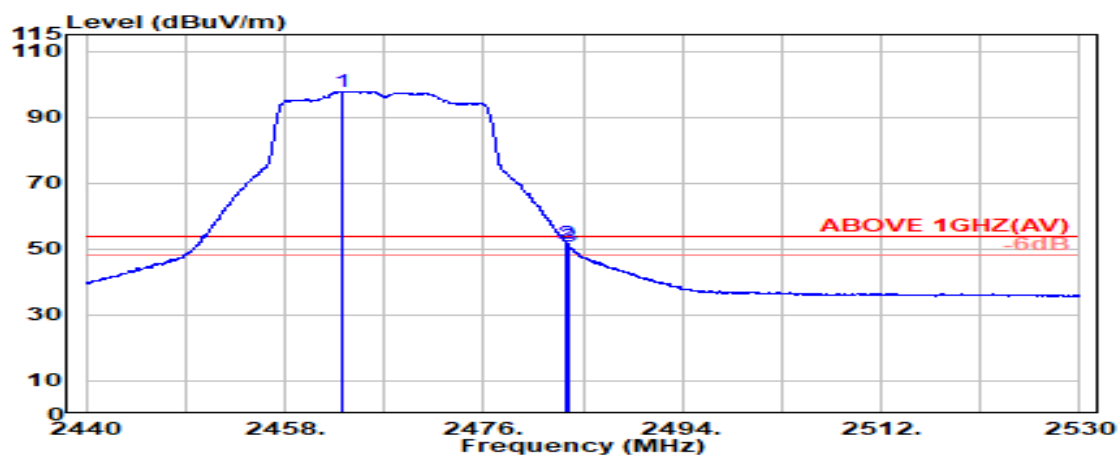

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.200	28.33	5.81	39.87	103.51	97.77	---	---	Average
2483.500	28.37	5.83	39.87	57.32	51.64	54.00	2.36	Average
2483.700	28.37	5.83	39.87	56.59	50.92	54.00	3.08	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

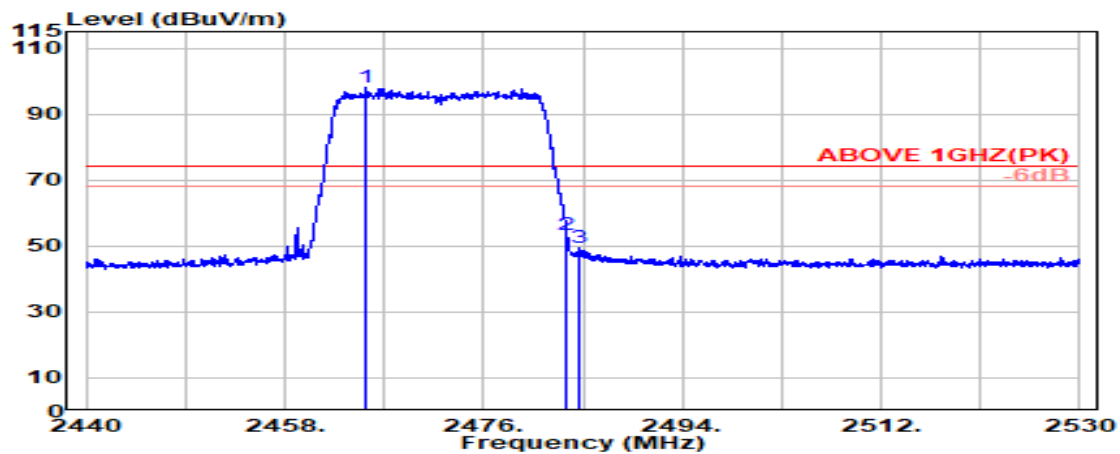

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.33	5.81	39.87	103.67	97.94	74.00	-23.94	Peak
2483.500	28.37	5.83	39.87	58.84	53.16	74.00	20.84	Peak
2484.550	28.37	5.83	39.87	55.13	49.46	74.00	24.54	Peak

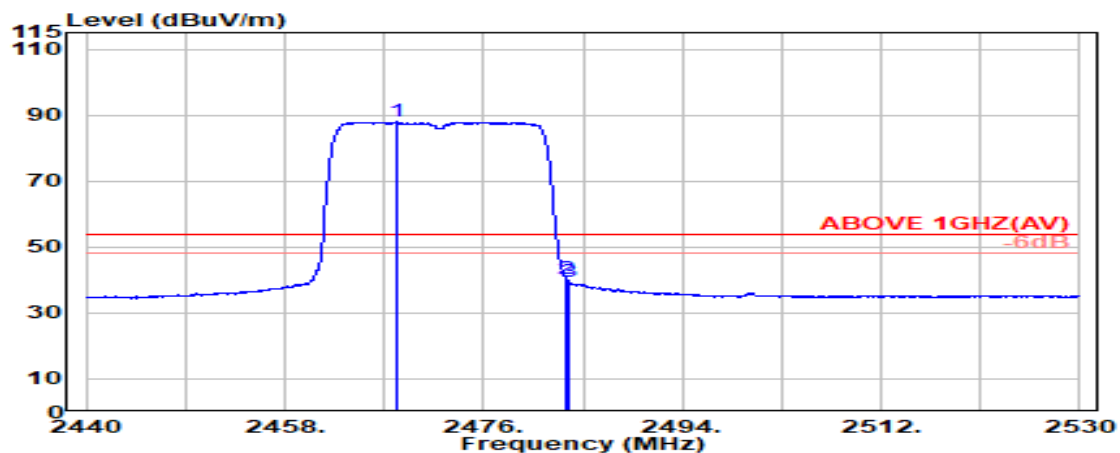

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.34	5.81	39.87	93.65	87.93	54.00	-33.93	Average
2483.500	28.37	5.83	39.87	45.92	40.25	54.00	13.75	Average
2483.700	28.37	5.83	39.87	45.17	39.50	54.00	14.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

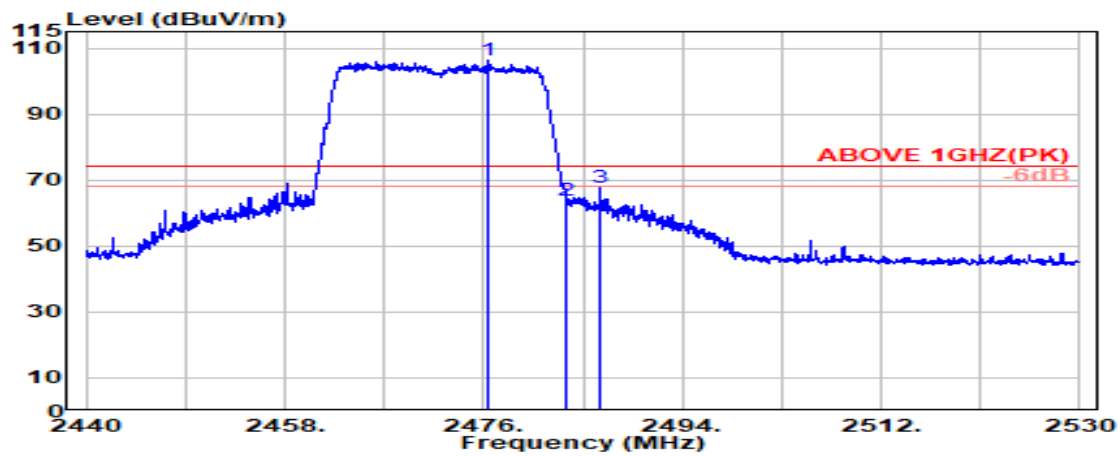

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.450	28.35	5.82	39.87	111.81	106.12	74.00	-32.12	Peak
2483.500	28.37	5.83	39.87	69.40	63.72	74.00	10.28	Peak
2486.600	28.37	5.83	39.87	73.44	67.78	74.00	6.22	Peak

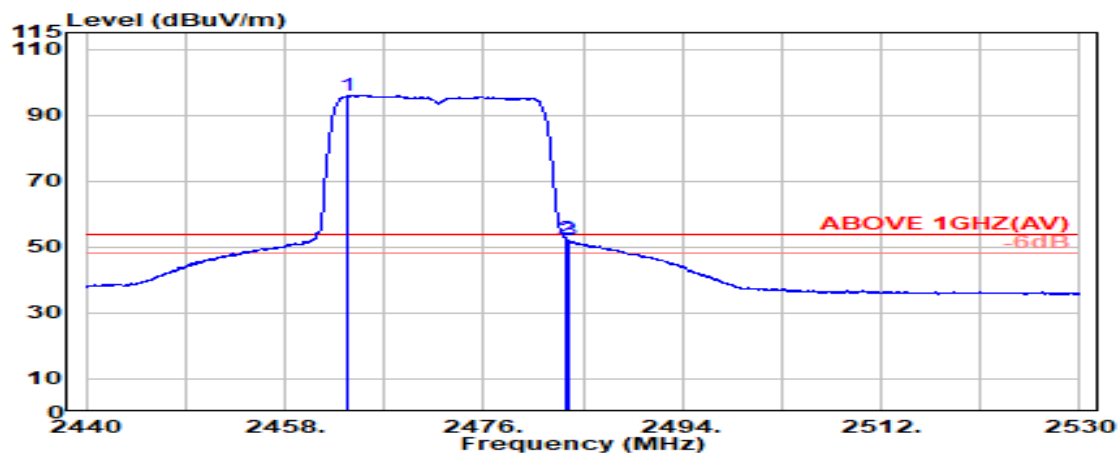

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.750	28.33	5.81	39.87	101.75	96.02	54.00	-42.02	Average
2483.500	28.37	5.83	39.87	58.00	52.33	54.00	1.67	Average
2483.750	28.37	5.83	39.87	57.55	51.88	54.00	2.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

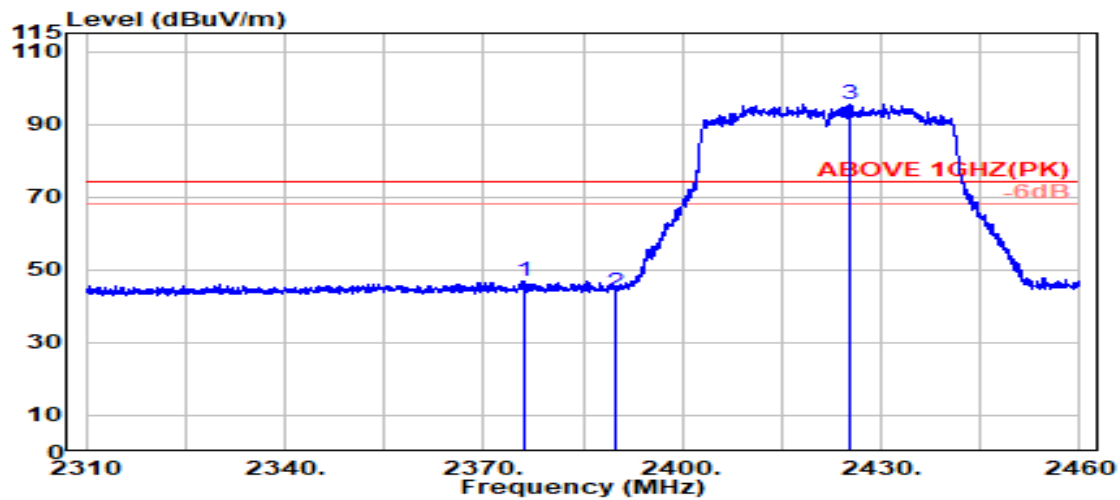

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.300	28.19	5.70	39.88	52.91	46.93	74.00	27.07	Peak
2389.800	28.14	5.72	39.88	49.95	43.93	74.00	30.07	Peak
@ 2425.350	28.20	5.76	39.88	101.53	95.62	---	---	Peak

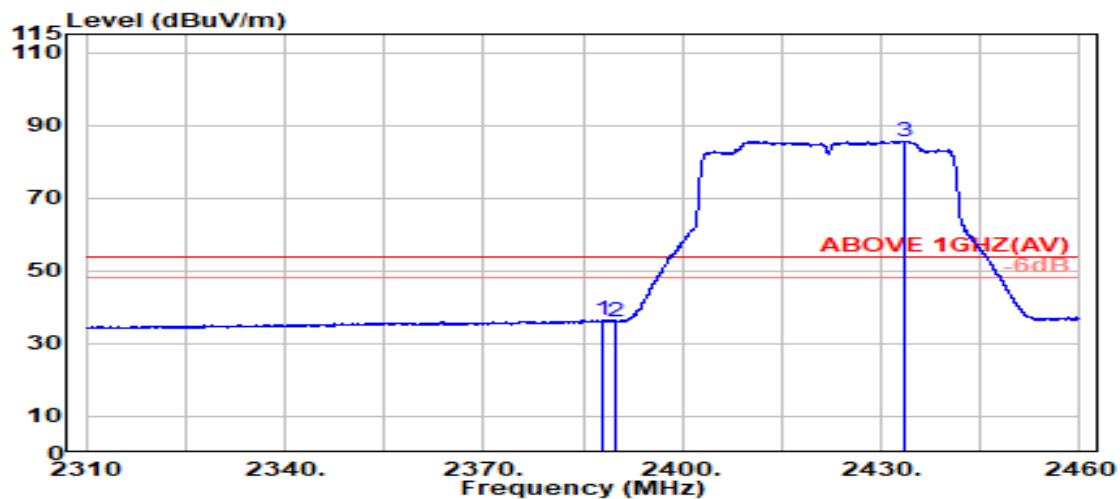

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.15	5.72	39.88	42.54	36.52	54.00	17.48	Average
2389.800	28.14	5.72	39.88	42.03	36.01	54.00	17.99	Average
@ 2433.450	28.23	5.77	39.87	91.55	85.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

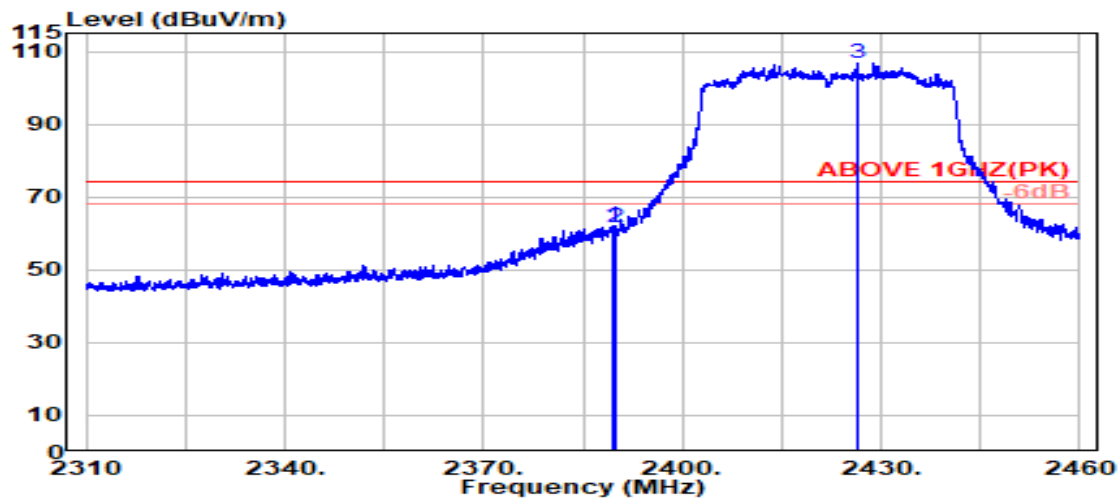

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	68.03	62.02	74.00	11.98	Peak
2389.800	28.14	5.72	39.88	67.74	61.72	74.00	12.28	Peak
@ 2426.600	28.21	5.76	39.88	112.79	106.89	---	---	Peak

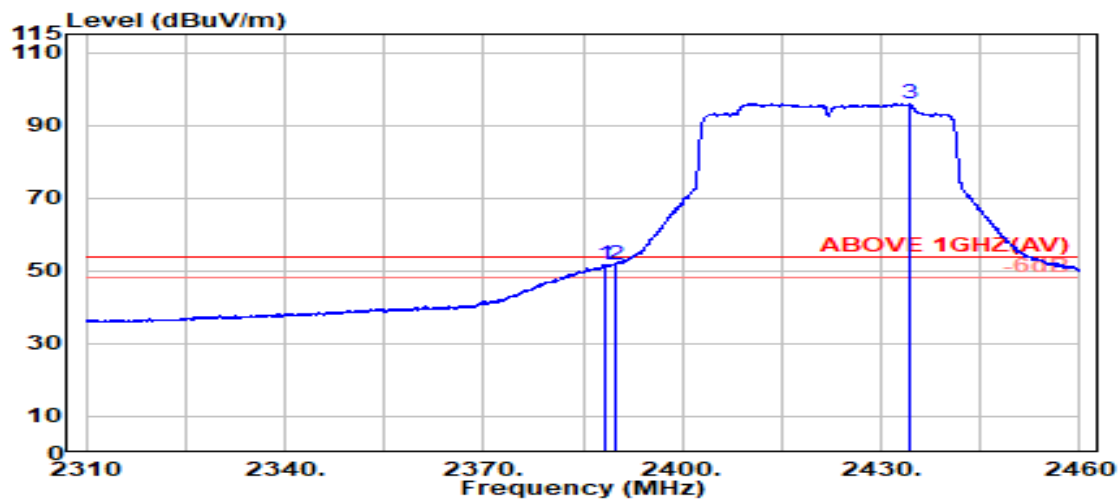

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.15	5.72	39.88	57.83	51.82	54.00	2.18	Average
2389.800	28.14	5.72	39.88	57.75	51.73	54.00	2.27	Average
@ 2434.250	28.24	5.77	39.87	101.85	95.98	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

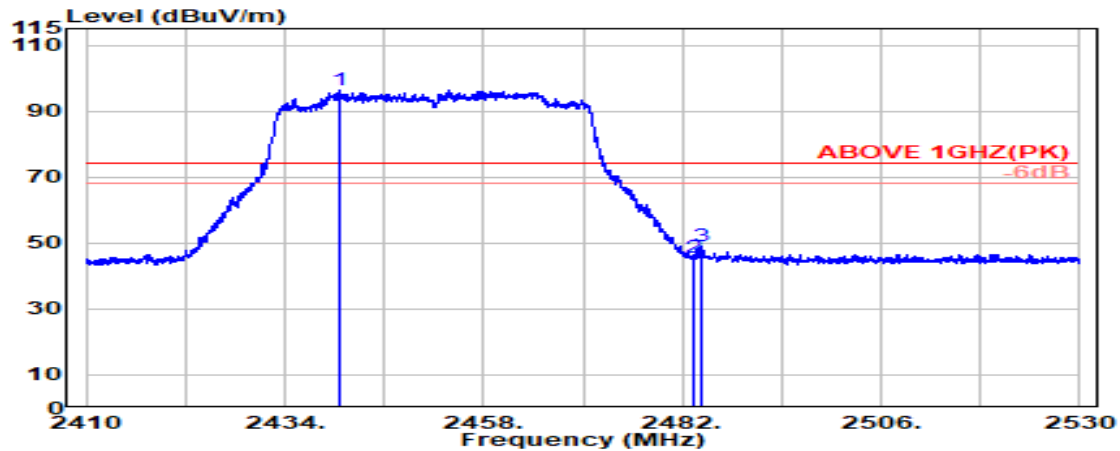

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.600	28.26	5.78	39.87	102.24	96.41	---	---	Peak
2483.500	28.37	5.83	39.87	51.39	45.72	74.00	28.28	Peak
2484.250	28.37	5.83	39.87	54.60	48.93	74.00	25.07	Peak

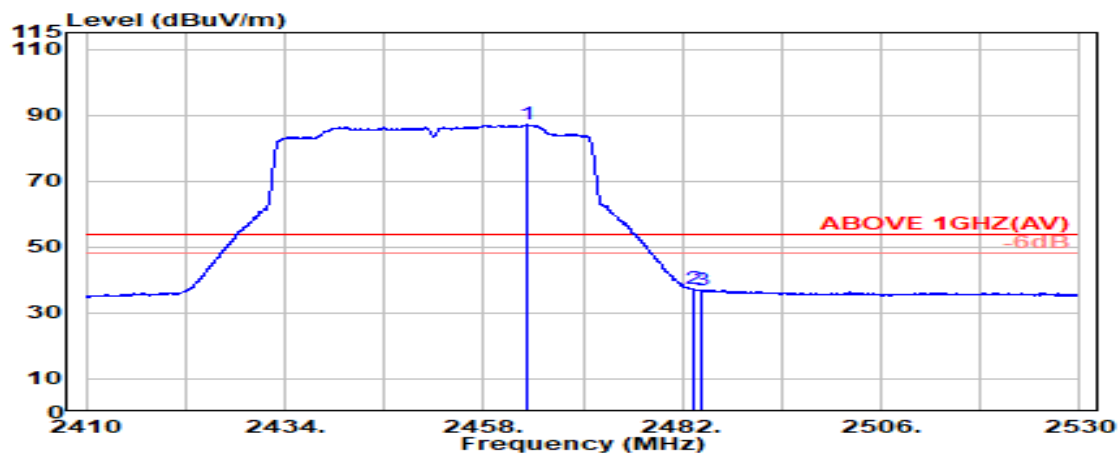


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.250	28.33	5.81	39.87	92.86	87.12	---	---	Average
2483.500	28.37	5.83	39.87	42.82	37.15	54.00	16.85	Average
2484.200	28.37	5.83	39.87	42.73	37.05	54.00	16.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

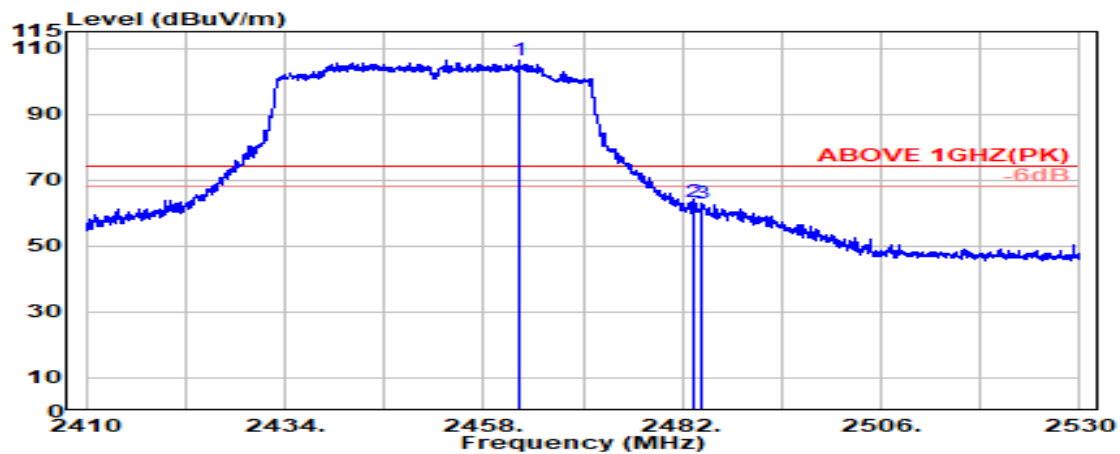

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.250	28.32	5.81	39.87	112.04	106.30	---	---	Peak
2483.500	28.37	5.83	39.87	69.20	63.53	74.00	10.47	Peak
2484.300	28.37	5.83	39.87	68.41	62.74	74.00	11.26	Peak

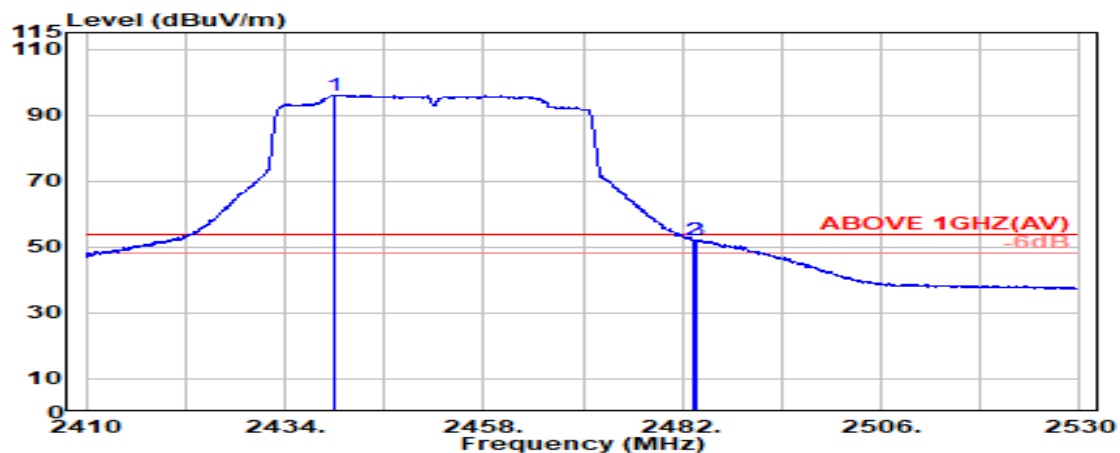

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.000	28.26	5.78	39.87	101.96	96.12	---	---	Average
2483.500	28.37	5.83	39.87	57.70	52.02	54.00	1.98	Average
2483.800	28.37	5.83	39.87	57.86	52.19	54.00	1.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

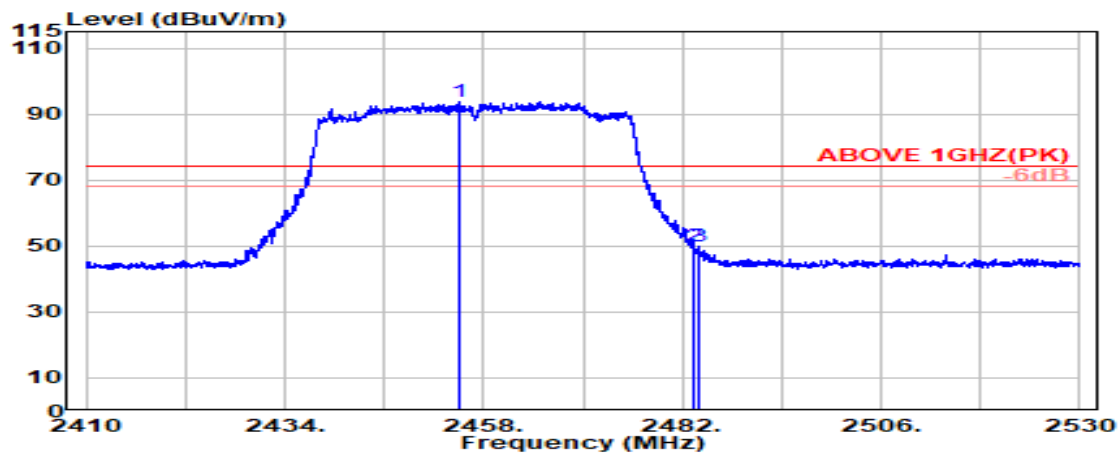

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.000	28.31	5.80	39.87	99.49	93.73	---	---	Peak
2483.500	28.37	5.83	39.87	55.77	50.10	74.00	23.90	Peak
2483.900	28.37	5.83	39.87	55.60	49.93	74.00	24.07	Peak

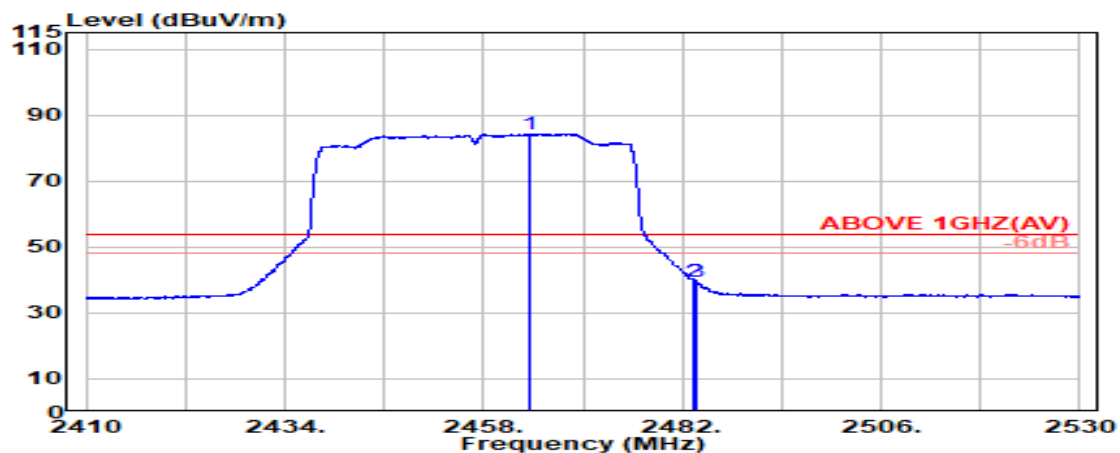


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.650	28.33	5.81	39.87	90.09	84.35	---	---	Average
2483.500	28.37	5.83	39.87	45.35	39.68	54.00	14.32	Average
2483.700	28.37	5.83	39.87	44.96	39.28	54.00	14.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

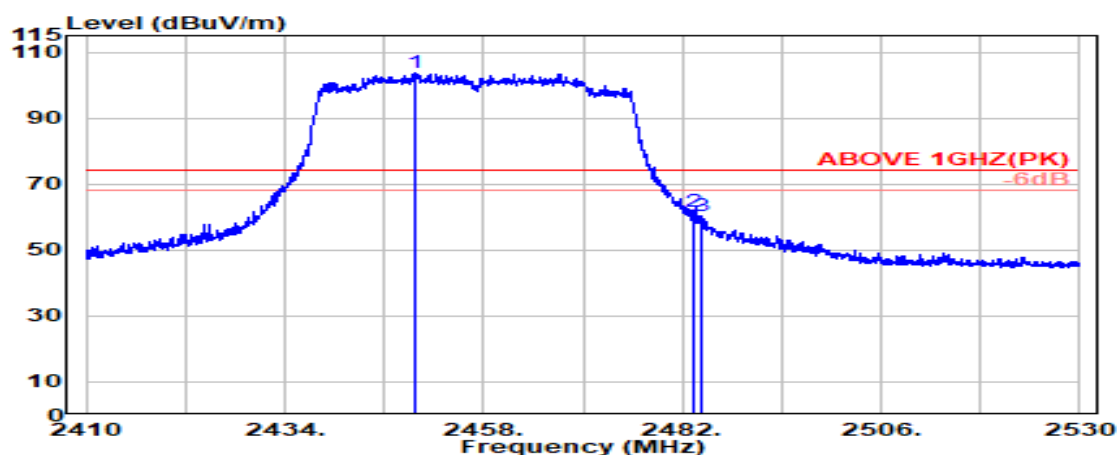

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.600	28.30	5.79	39.87	109.34	103.55	---	---	Peak
2483.500	28.37	5.83	39.87	67.50	61.83	74.00	12.17	Peak
2484.200	28.37	5.83	39.87	66.00	60.33	74.00	13.67	Peak

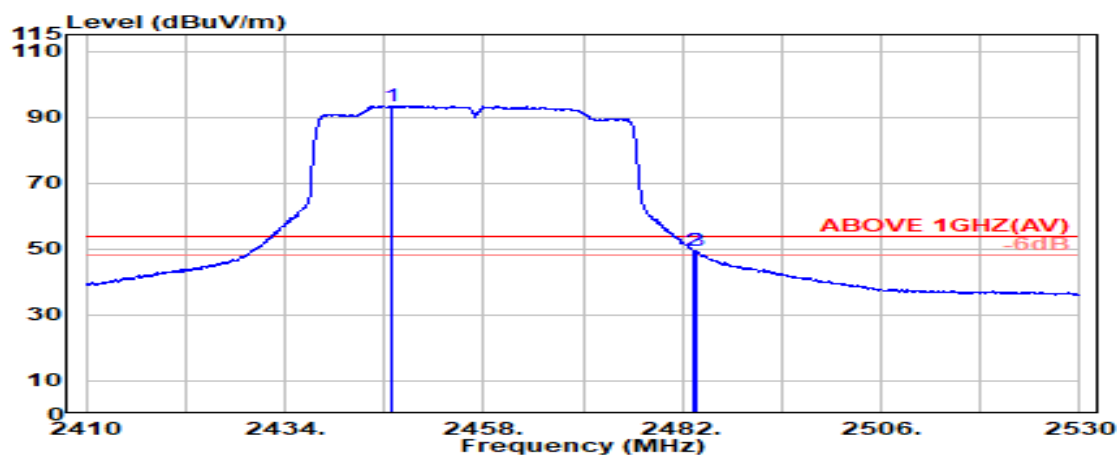

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.050	28.29	5.79	39.87	99.25	93.46	---	---	Average
2483.500	28.37	5.83	39.87	55.11	49.44	54.00	4.56	Average
2483.700	28.37	5.83	39.87	55.00	49.33	54.00	4.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

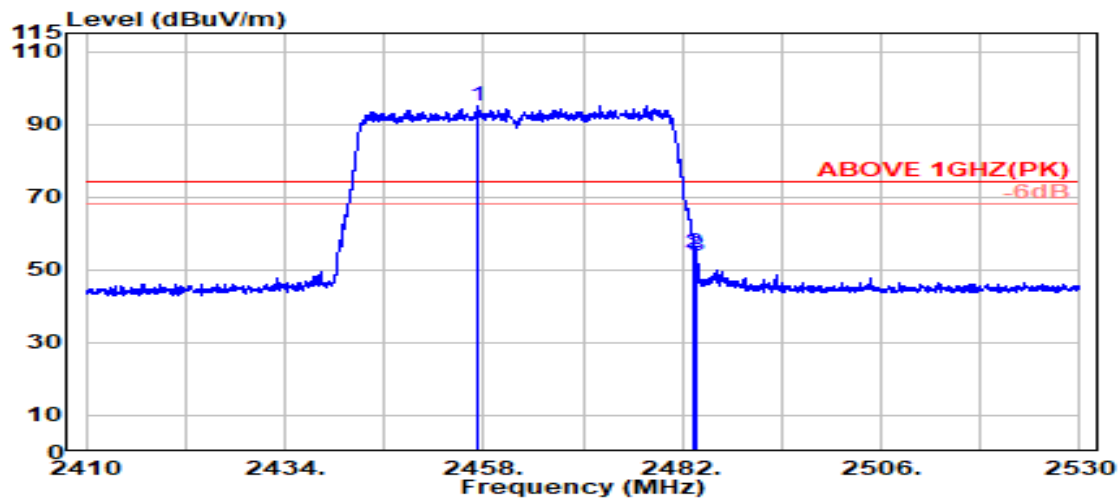

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.400	28.31	5.80	39.87	100.99	95.23	---	---	Peak
	2483.500	28.37	5.83	39.87	60.56	54.89	74.00	19.11	Peak
	2483.700	28.37	5.83	39.87	59.59	53.92	74.00	20.08	Peak

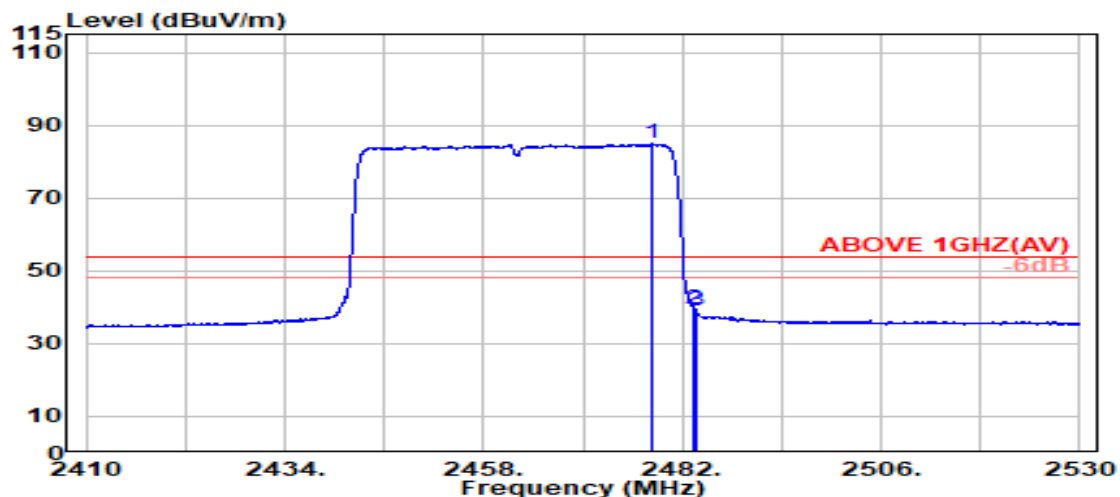

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.250	28.36	5.82	39.87	90.54	84.85	---	---	Average
	2483.500	28.37	5.83	39.87	44.96	39.28	54.00	14.72	Average
	2483.700	28.37	5.83	39.87	44.56	38.89	54.00	15.11	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

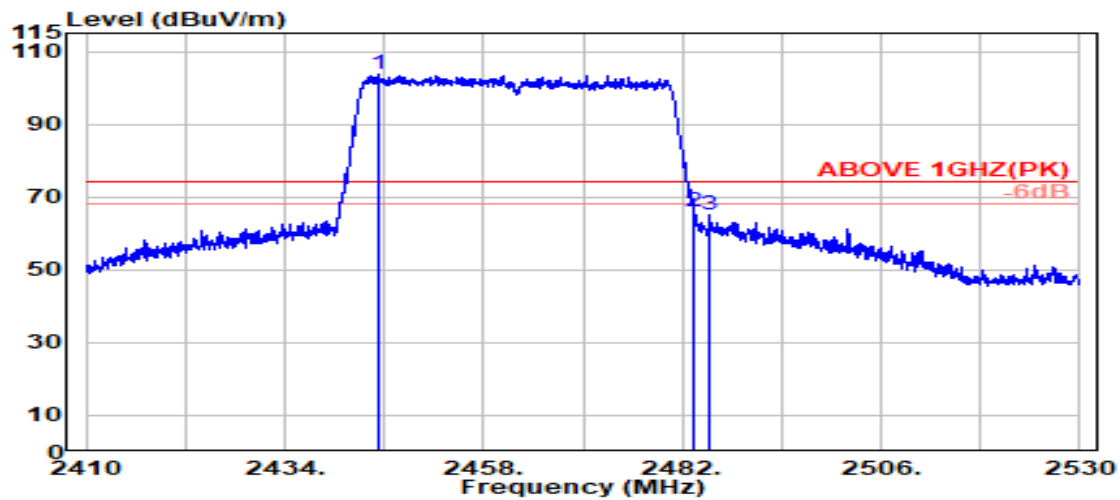

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.200	28.28	5.79	39.87	109.36	103.55	---	---	Peak
2483.500	28.37	5.83	39.87	71.55	65.87	74.00	8.13	Peak
2485.300	28.37	5.83	39.87	70.68	65.01	74.00	8.99	Peak

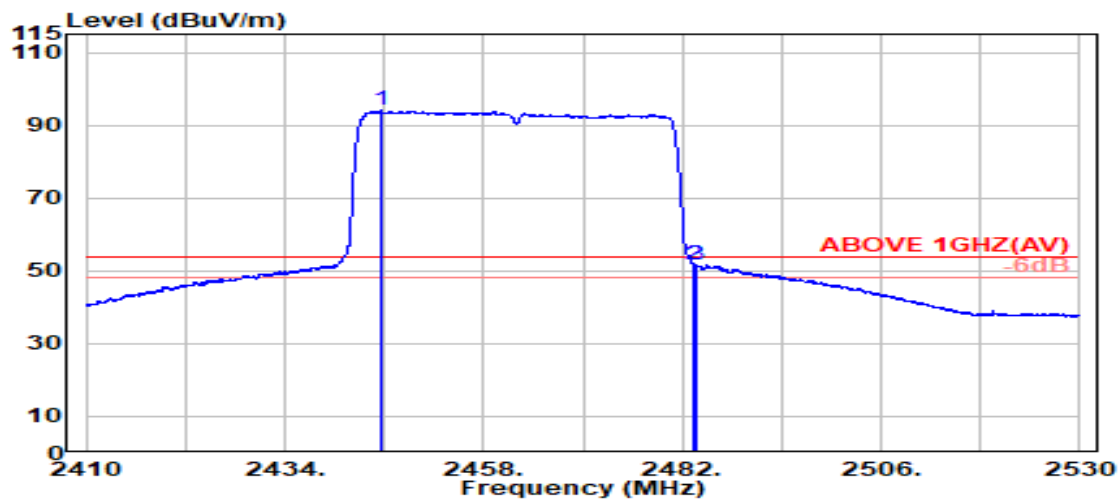

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.600	28.28	5.79	39.87	99.86	94.05	---	---	Average
2483.500	28.37	5.83	39.87	57.32	51.64	54.00	2.36	Average
2483.700	28.37	5.83	39.87	57.46	51.79	54.00	2.21	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

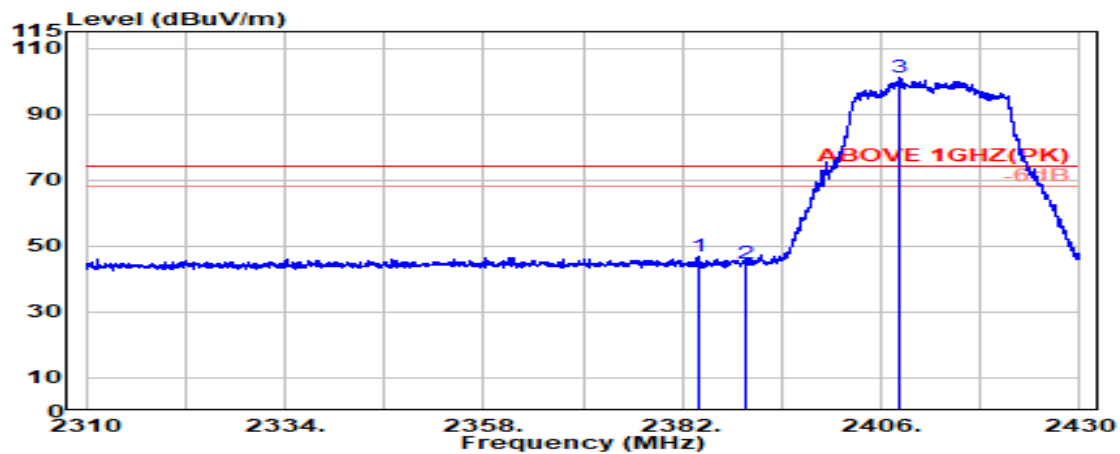

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.850	28.16	5.71	39.88	52.67	46.67	74.00	27.33	Peak
2389.800	28.14	5.72	39.88	50.66	44.64	74.00	29.36	Peak
@ 2408.350	28.13	5.74	39.88	107.02	101.02	---	---	Peak

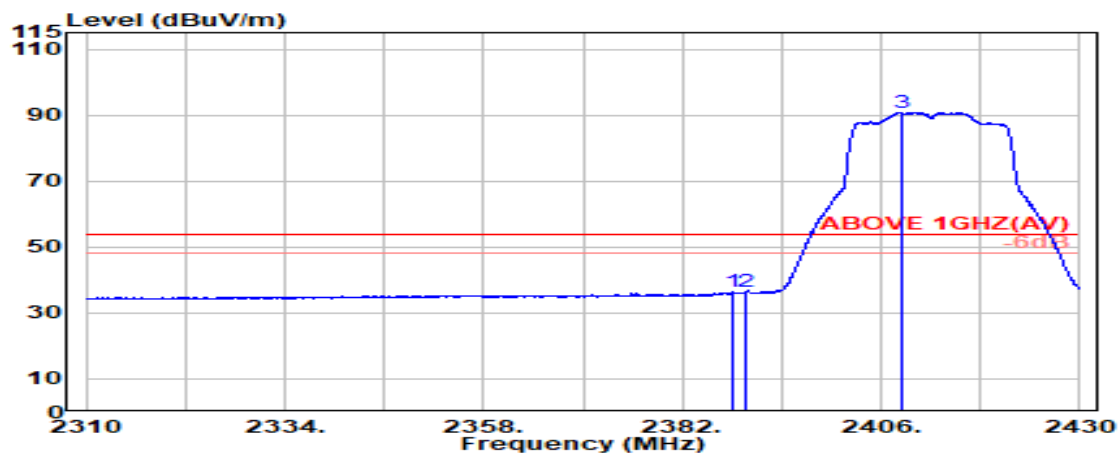

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	28.15	5.72	39.88	42.40	36.38	54.00	17.62	Average
2389.800	28.14	5.72	39.88	42.32	36.30	54.00	17.70	Average
@ 2408.400	28.13	5.74	39.88	96.86	90.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

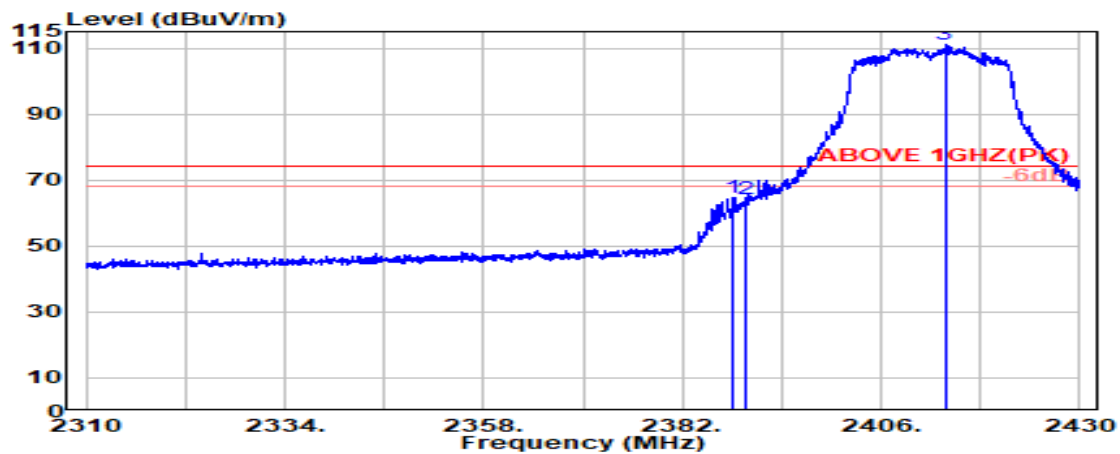

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.200	28.15	5.72	39.88	70.73	64.72	74.00	9.28	Peak
2389.800	28.14	5.72	39.88	70.18	64.16	74.00	9.84	Peak
@ 2413.700	28.16	5.75	39.88	117.04	111.07	---	---	Peak

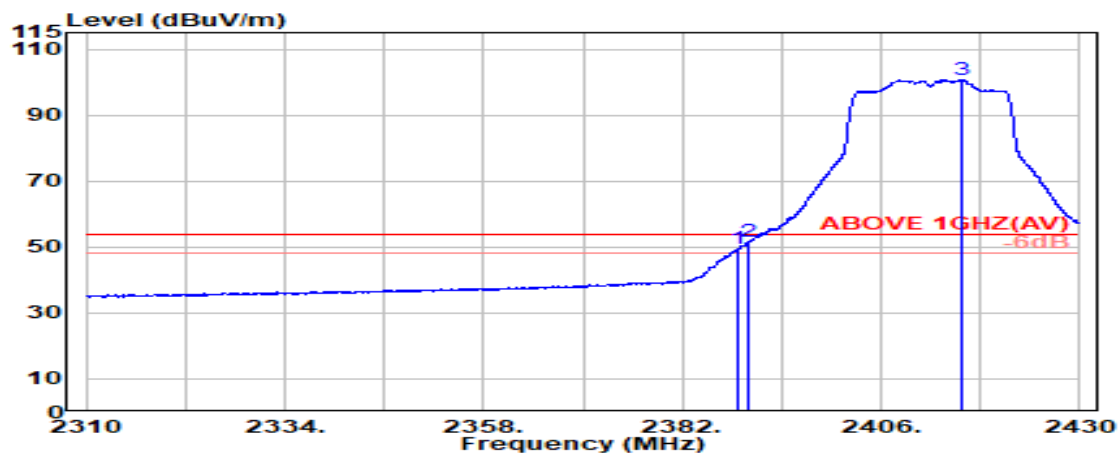

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.800	28.14	5.72	39.88	55.47	49.45	54.00	4.55	Average
2390.000	28.14	5.72	39.88	57.61	51.59	54.00	2.41	Average
@ 2415.600	28.16	5.75	39.88	106.74	100.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

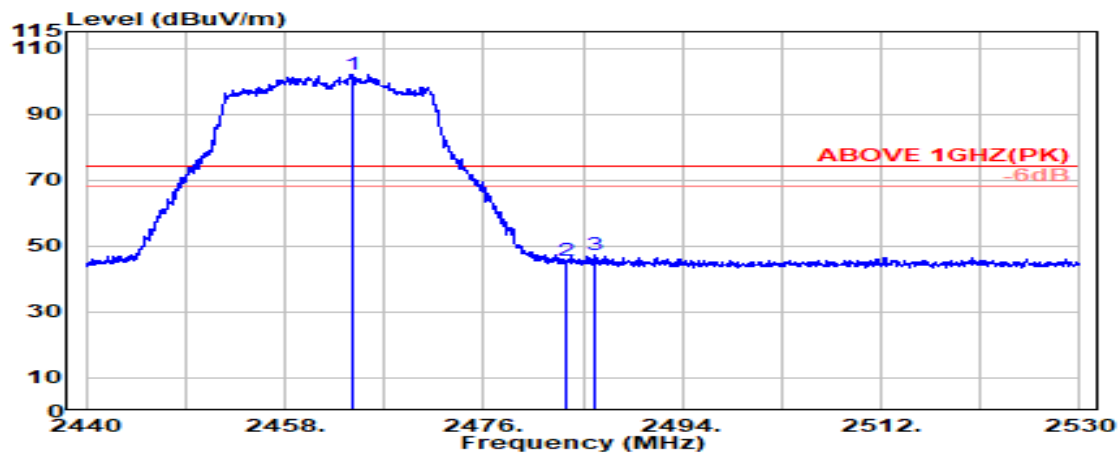

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.050	28.33	5.81	39.87	107.86	102.13	---	---	Peak
2483.500	28.37	5.83	39.87	51.26	45.59	74.00	28.41	Peak
2486.050	28.37	5.83	39.87	52.89	47.23	74.00	26.77	Peak

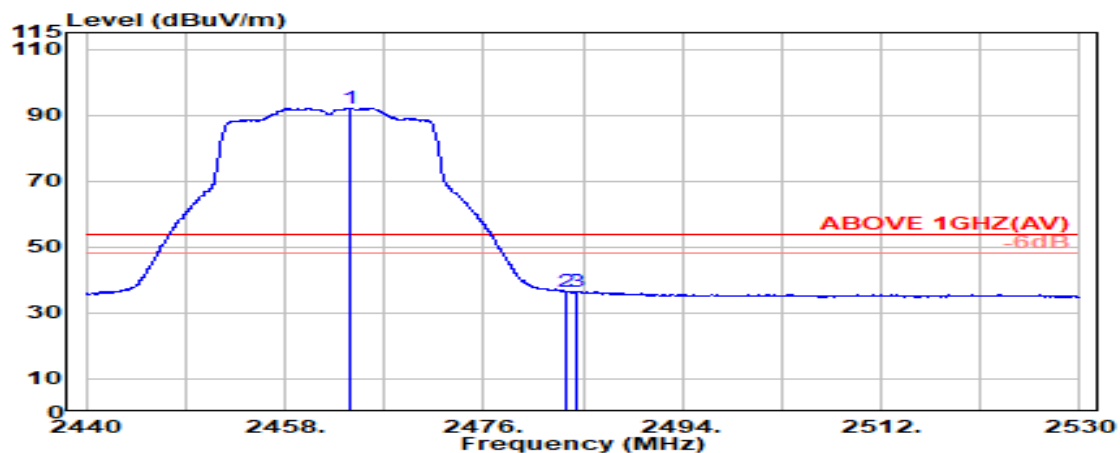


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.33	5.81	39.87	97.82	92.09	---	---	Average
2483.500	28.37	5.83	39.87	42.13	36.46	54.00	17.54	Average
2484.350	28.37	5.83	39.87	42.32	36.65	54.00	17.35	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

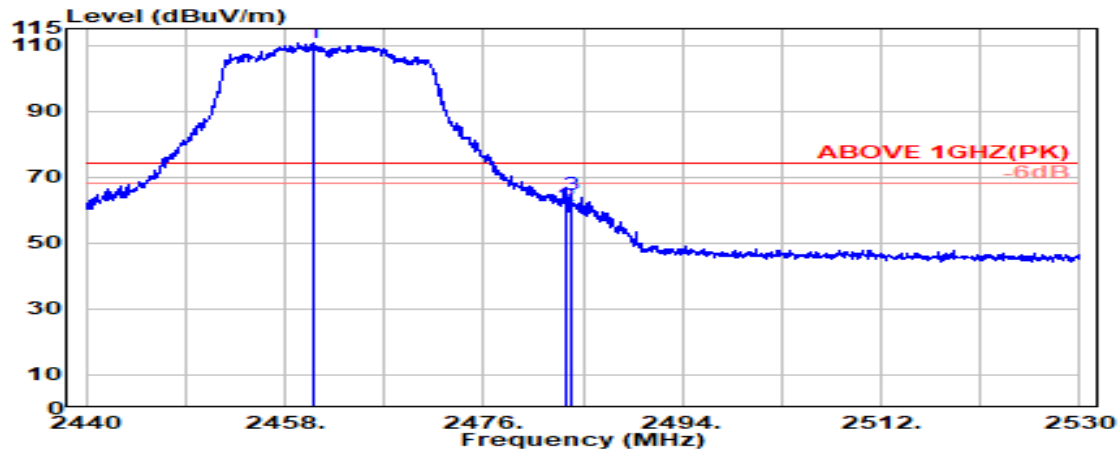

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	28.32	5.80	39.87	116.42	110.67	---	---	Peak
2483.500	28.37	5.83	39.87	66.96	61.29	74.00	12.71	Peak
2483.900	28.37	5.83	39.87	70.33	64.66	74.00	9.34	Peak

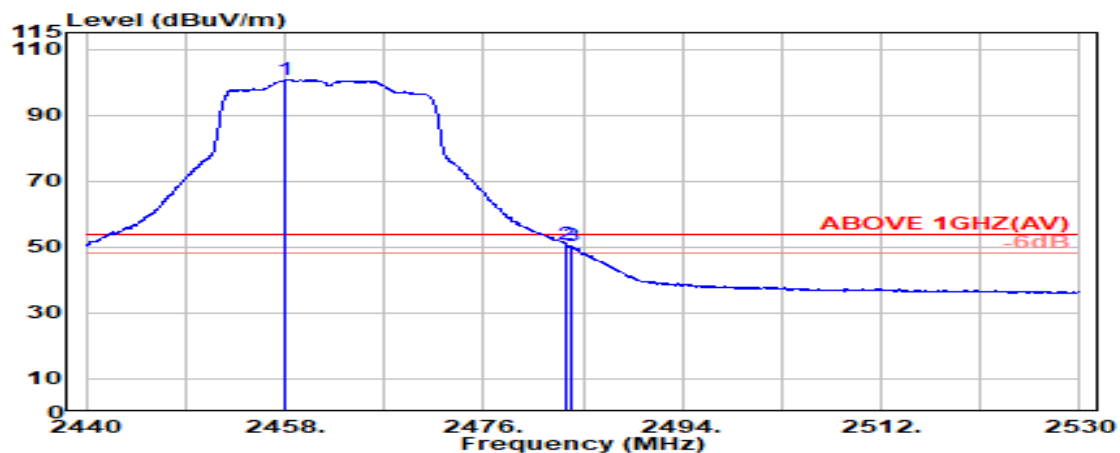

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.32	5.80	39.87	106.48	100.73	---	---	Average
2483.500	28.37	5.83	39.87	56.44	50.77	54.00	3.23	Average
2483.850	28.37	5.83	39.87	56.07	50.39	54.00	3.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

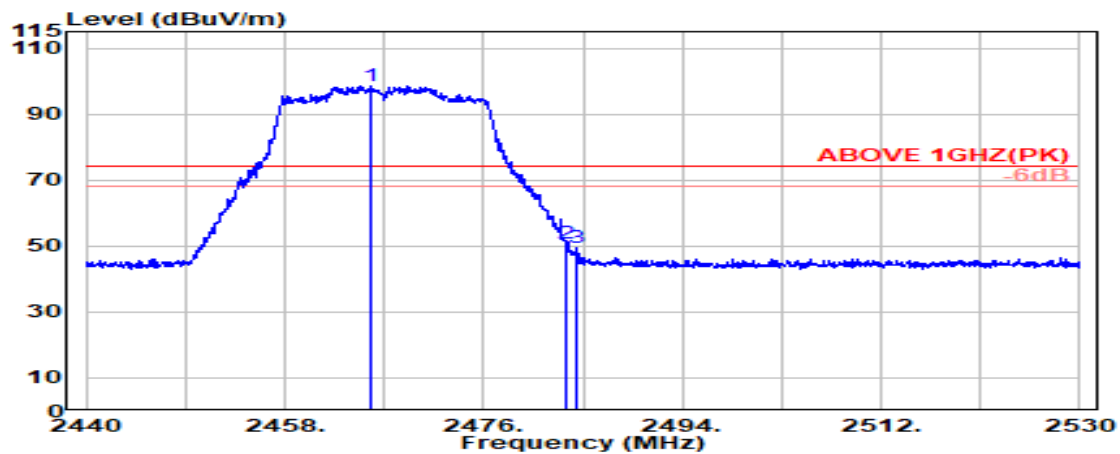

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.33	5.81	39.87	104.45	98.72	---	---	Peak
2483.500	28.37	5.83	39.87	56.61	50.94	74.00	23.06	Peak
2484.350	28.37	5.83	39.87	55.09	49.42	74.00	24.58	Peak

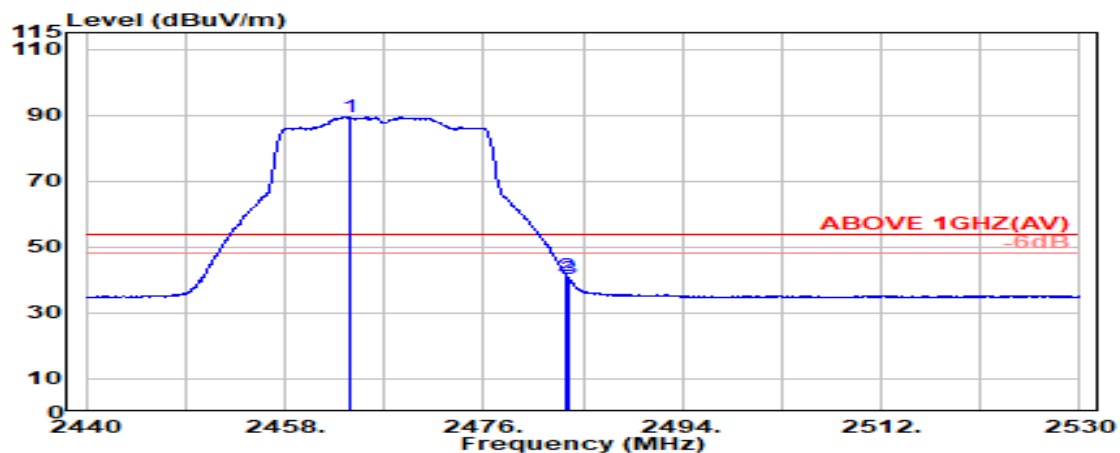


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.33	5.81	39.87	95.12	89.39	---	---	Average
2483.500	28.37	5.83	39.87	46.85	41.18	54.00	12.82	Average
2483.750	28.37	5.83	39.87	45.97	40.30	54.00	13.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

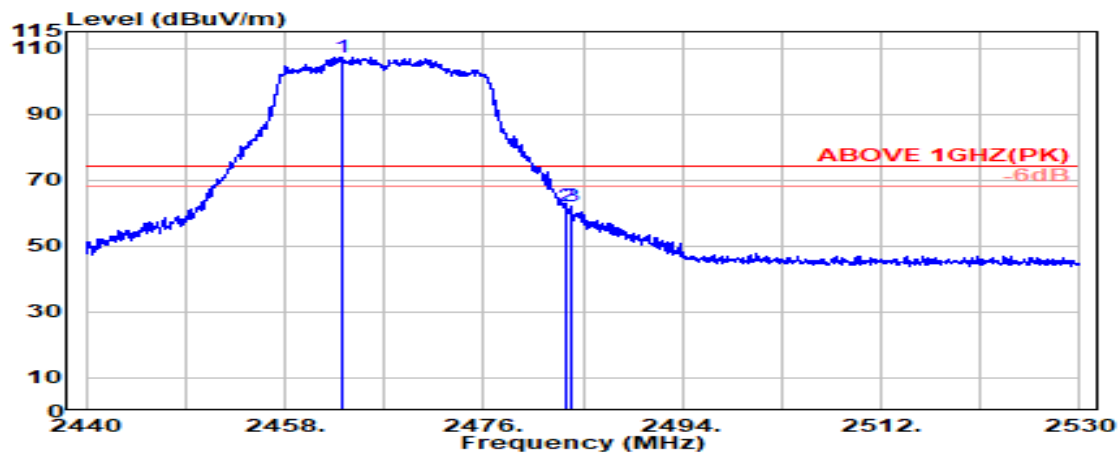

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.250	28.33	5.81	39.87	113.05	107.32	---	---	Peak
2483.500	28.37	5.83	39.87	67.67	62.00	74.00	12.00	Peak
2483.900	28.37	5.83	39.87	67.60	61.93	74.00	12.07	Peak

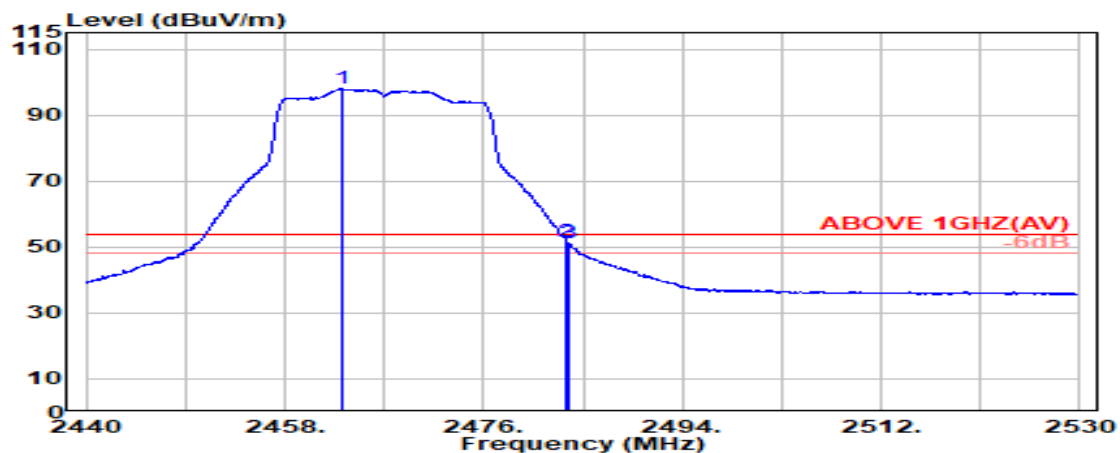

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.100	28.33	5.81	39.87	103.64	97.91	---	---	Average
2483.500	28.37	5.83	39.87	57.46	51.79	54.00	2.21	Average
2483.700	28.37	5.83	39.87	56.85	51.18	54.00	2.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

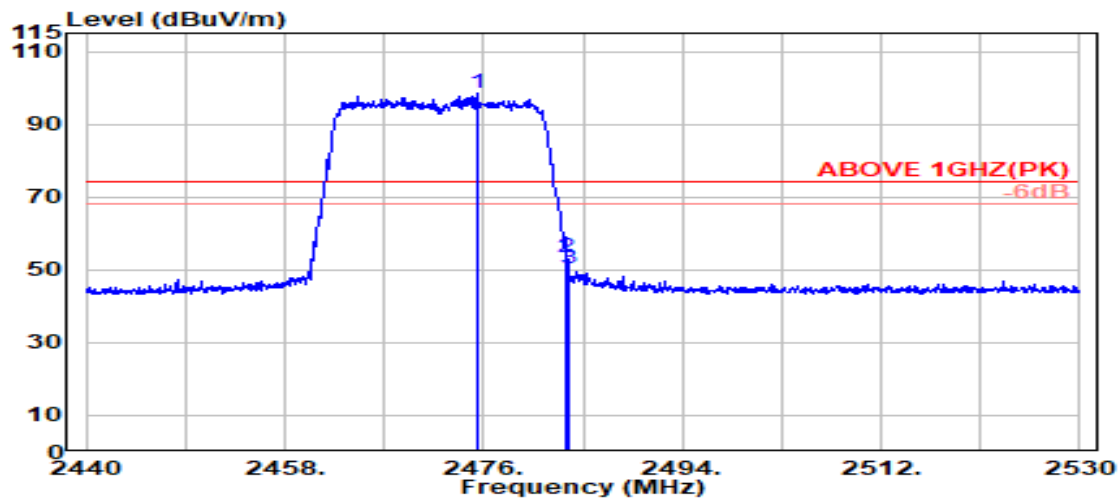

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.350	28.35	5.82	39.87	104.24	98.55	---	---	Peak
2483.500	28.37	5.83	39.87	58.96	53.28	74.00	20.72	Peak
2483.700	28.37	5.83	39.87	56.11	50.44	74.00	23.56	Peak

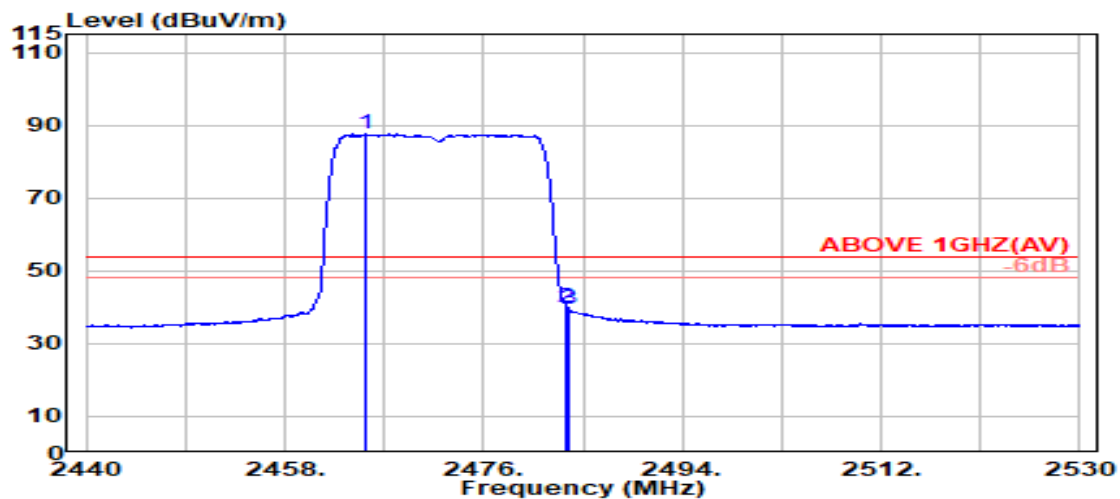

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.250	28.33	5.81	39.87	93.23	87.50	---	---	Average
2483.500	28.37	5.83	39.87	45.56	39.89	54.00	14.11	Average
2483.750	28.37	5.83	39.87	45.19	39.52	54.00	14.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

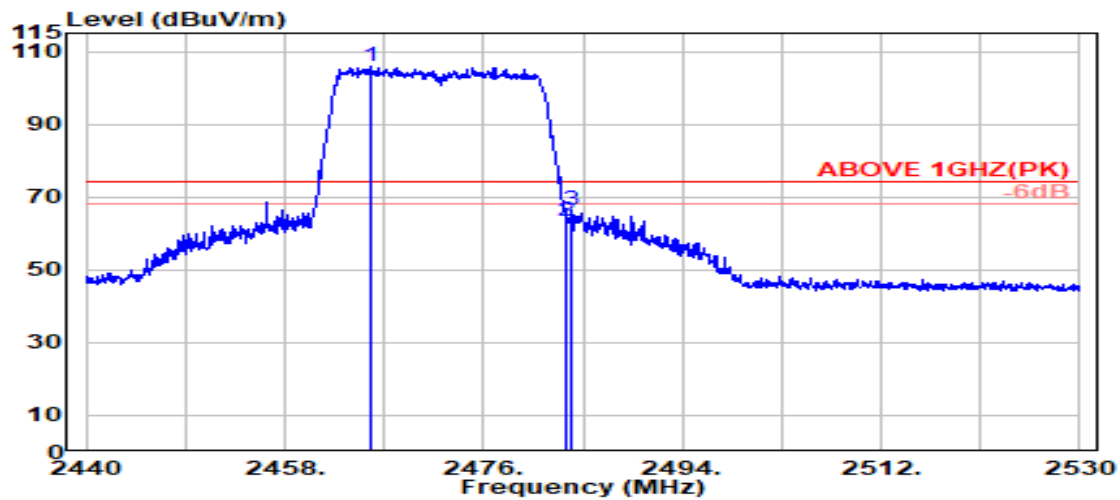

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.750	28.33	5.81	39.87	111.42	105.69	---	---	Peak
2483.500	28.37	5.83	39.87	68.82	63.15	74.00	10.85	Peak
2484.000	28.37	5.83	39.87	72.06	66.39	74.00	7.61	Peak

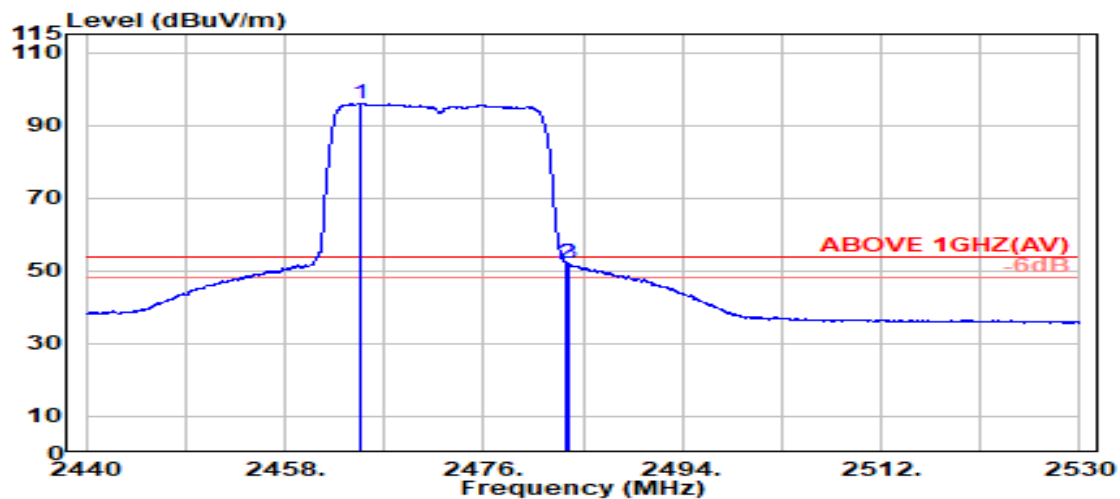

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.950	28.33	5.81	39.87	101.84	96.11	---	---	Average
2483.500	28.37	5.83	39.87	57.80	52.12	54.00	1.88	Average
2483.700	28.37	5.83	39.87	57.54	51.86	54.00	2.14	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

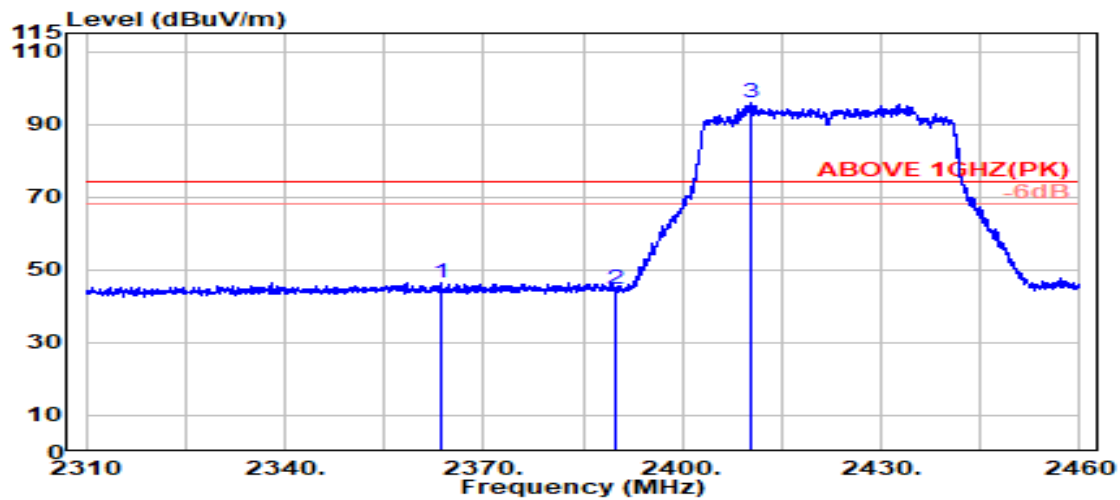

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2363.650	28.24	5.69	39.88	52.42	46.47	74.00	27.53	Peak
2389.800	28.14	5.72	39.88	50.80	44.78	74.00	29.22	Peak
@ 2410.200	28.14	5.75	39.88	101.93	95.94	---	---	Peak

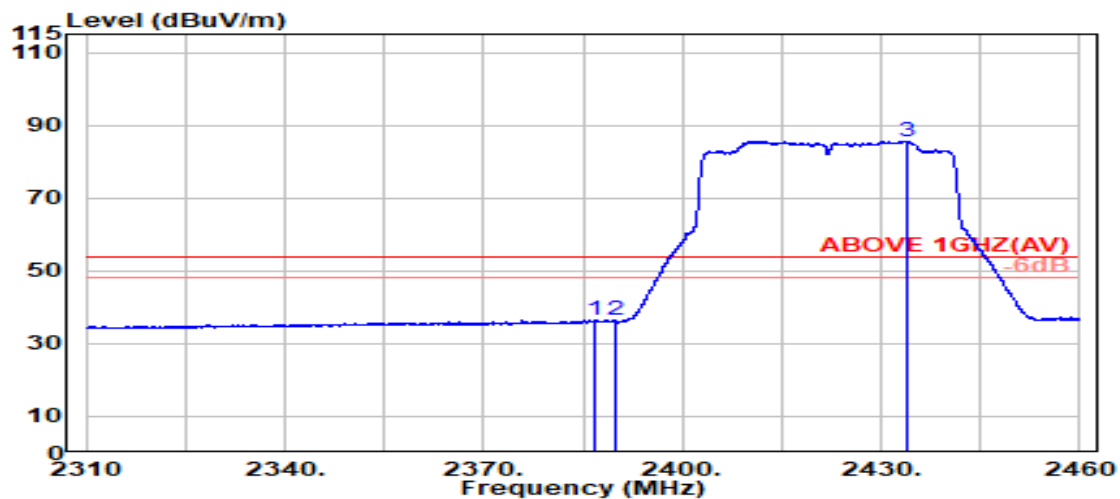

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.900	28.15	5.72	39.88	42.42	36.41	54.00	17.59	Average
2389.800	28.14	5.72	39.88	42.28	36.26	54.00	17.74	Average
@ 2434.000	28.24	5.77	39.87	91.55	85.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

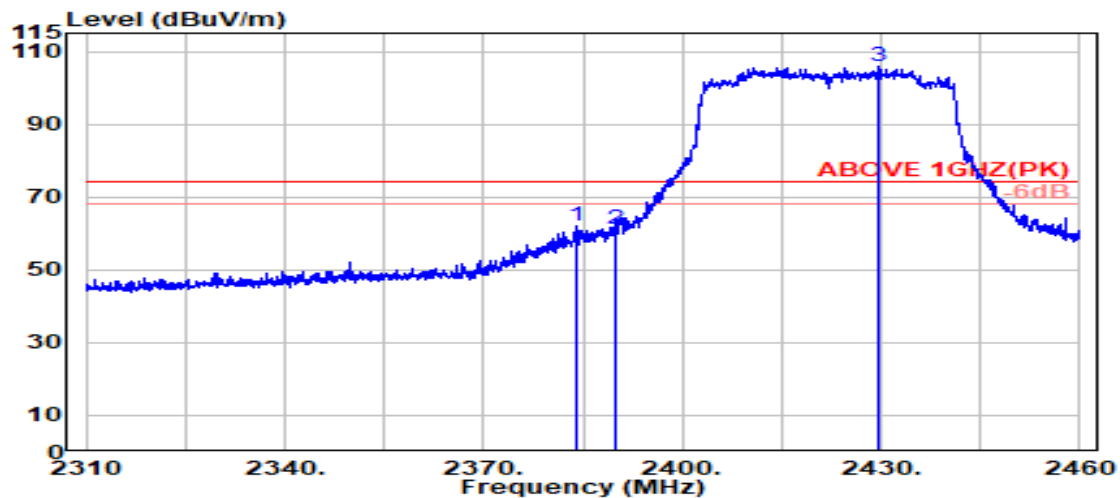

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.050	28.16	5.71	39.88	68.24	62.24	74.00	11.76	Peak
2389.800	28.14	5.72	39.88	67.41	61.39	74.00	12.61	Peak
@ 2429.700	28.22	5.77	39.88	111.88	106.00	---	---	Peak

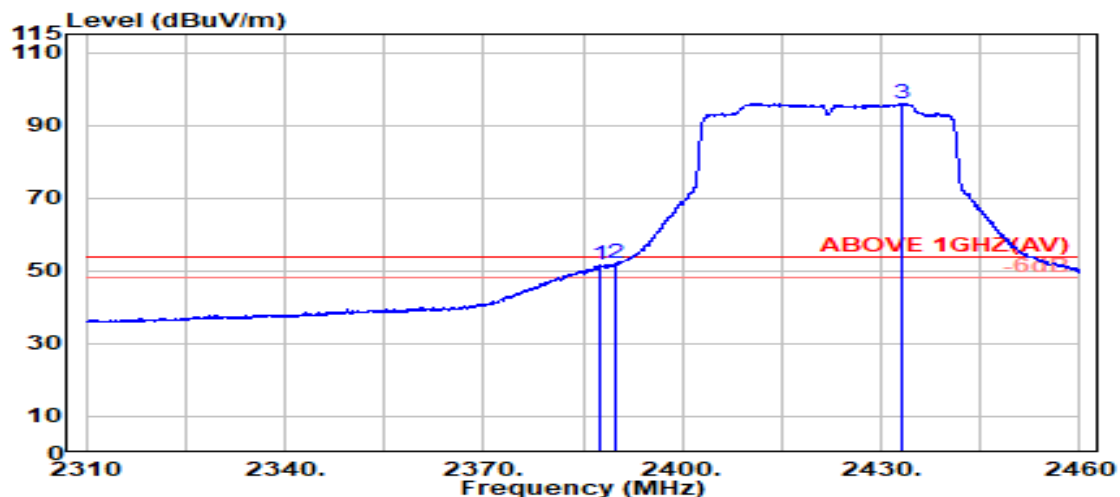


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	28.15	5.72	39.88	57.64	51.63	54.00	2.37	Average
2389.800	28.14	5.72	39.88	58.01	51.99	54.00	2.01	Average
@ 2433.150	28.23	5.77	39.87	101.75	95.88	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

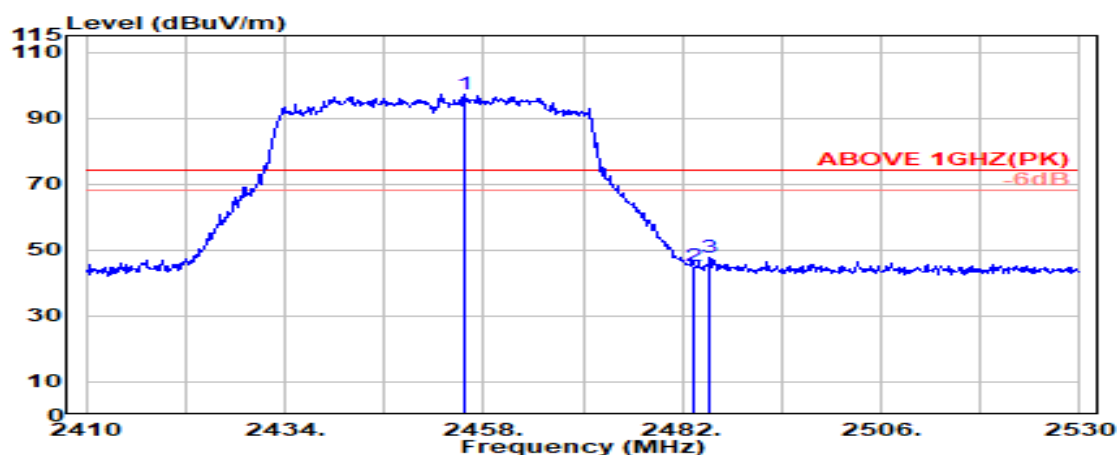

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.600	28.31	5.80	39.87	103.15	97.39	---	---	Peak
2483.500	28.37	5.83	39.87	50.73	45.06	74.00	28.94	Peak
2485.382	28.37	5.83	39.87	53.19	47.53	74.00	26.47	Peak

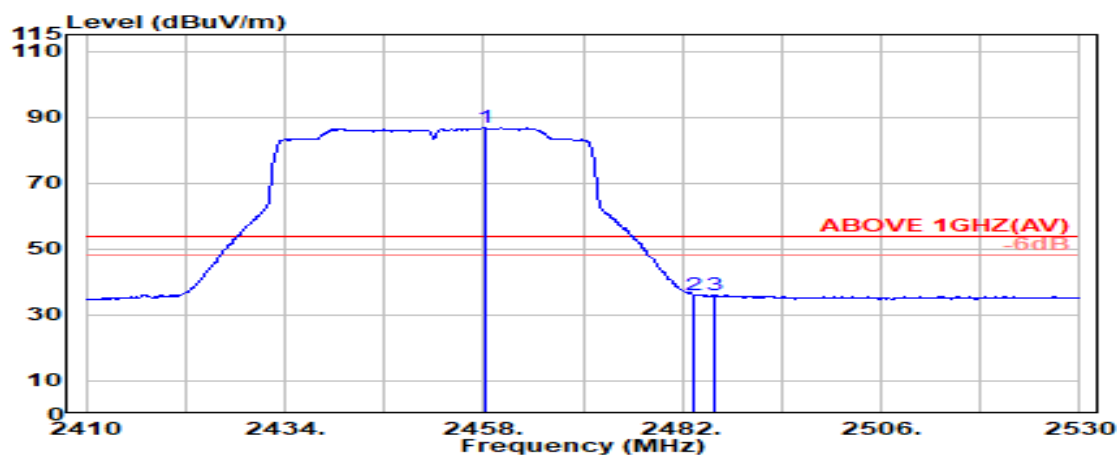

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.218	28.32	5.80	39.87	92.60	86.85	---	---	Average
2483.500	28.37	5.83	39.87	41.89	36.22	54.00	17.78	Average
2485.818	28.37	5.83	39.87	41.64	35.97	54.00	18.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

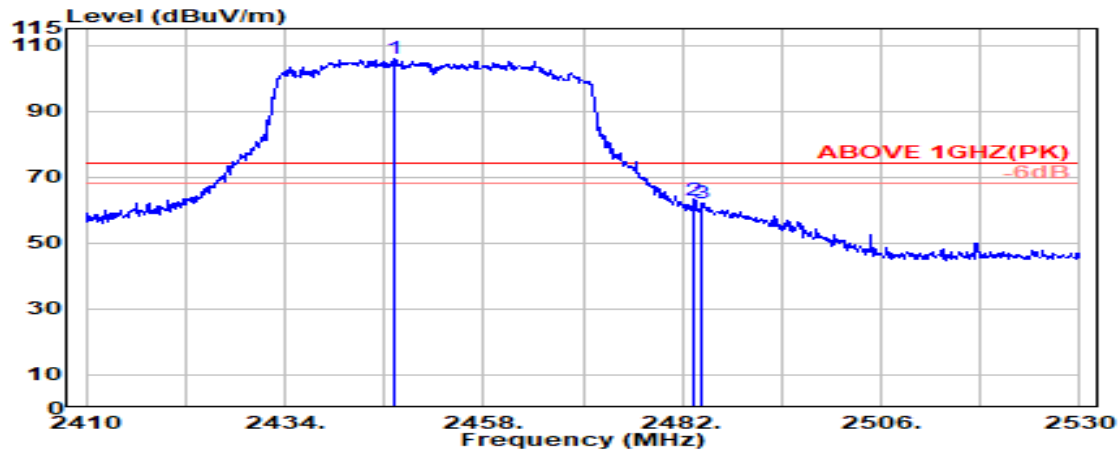

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.091	28.29	5.79	39.87	111.89	106.09	---	---	Peak
2483.500	28.37	5.83	39.87	68.42	62.75	74.00	11.25	Peak
2484.400	28.37	5.83	39.87	67.74	62.07	74.00	11.93	Peak

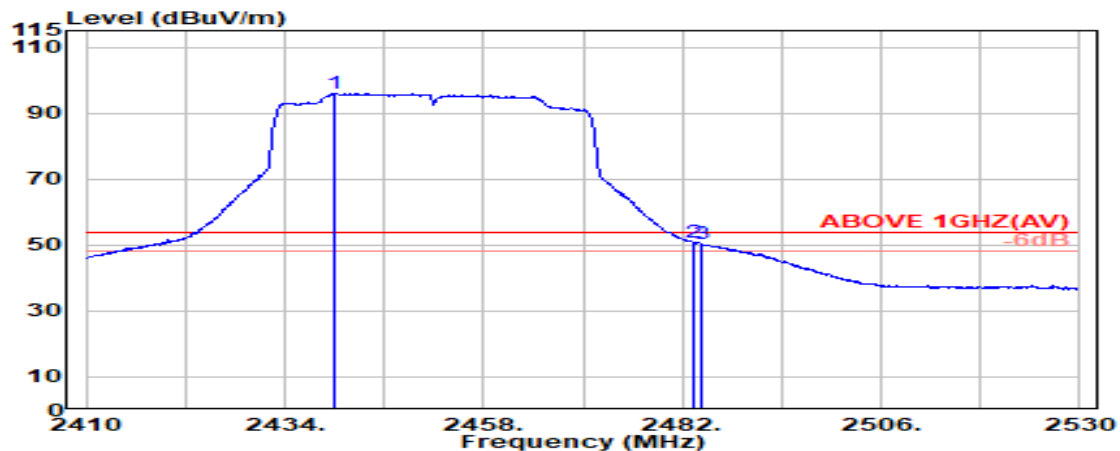

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.109	28.26	5.78	39.87	101.72	95.89	---	---	Average
2483.500	28.37	5.83	39.87	56.54	50.86	54.00	3.14	Average
2484.400	28.37	5.83	39.87	55.99	50.32	54.00	3.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

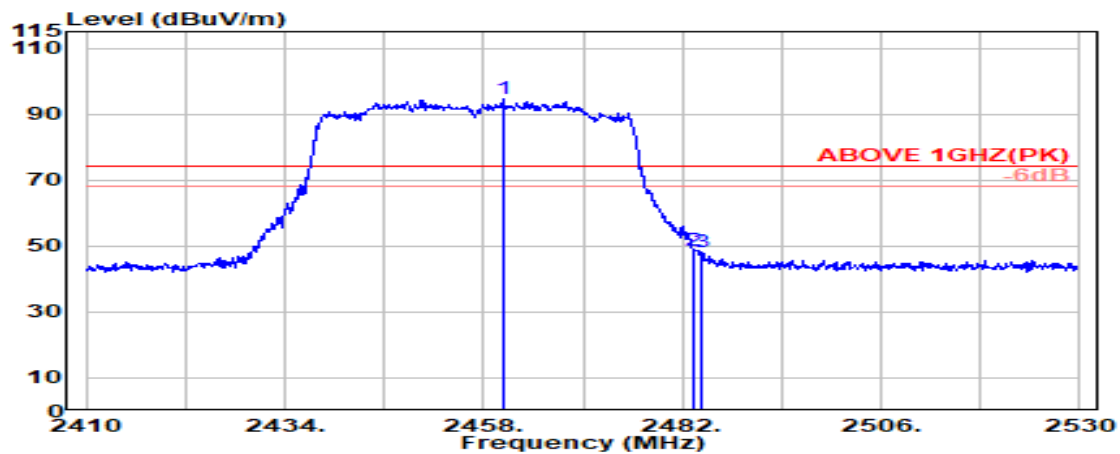

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.291	28.32	5.80	39.87	100.21	94.46	---	---	Peak
2483.500	28.37	5.83	39.87	54.40	48.73	74.00	25.27	Peak
2484.400	28.37	5.83	39.87	53.87	48.20	74.00	25.80	Peak

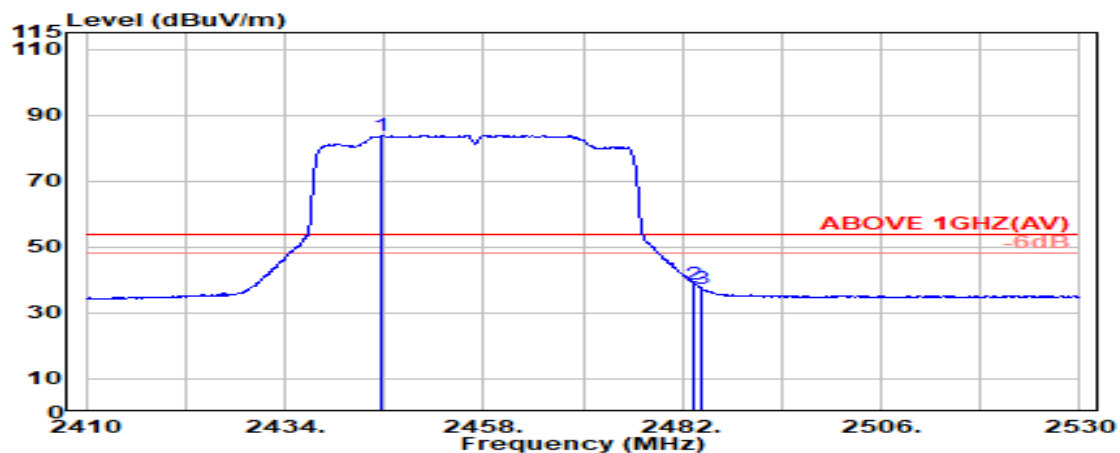


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.673	28.28	5.79	39.87	89.68	83.87	---	---	Average
2483.500	28.37	5.83	39.87	44.45	38.78	54.00	15.22	Average
2484.400	28.37	5.83	39.87	42.98	37.31	54.00	16.69	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

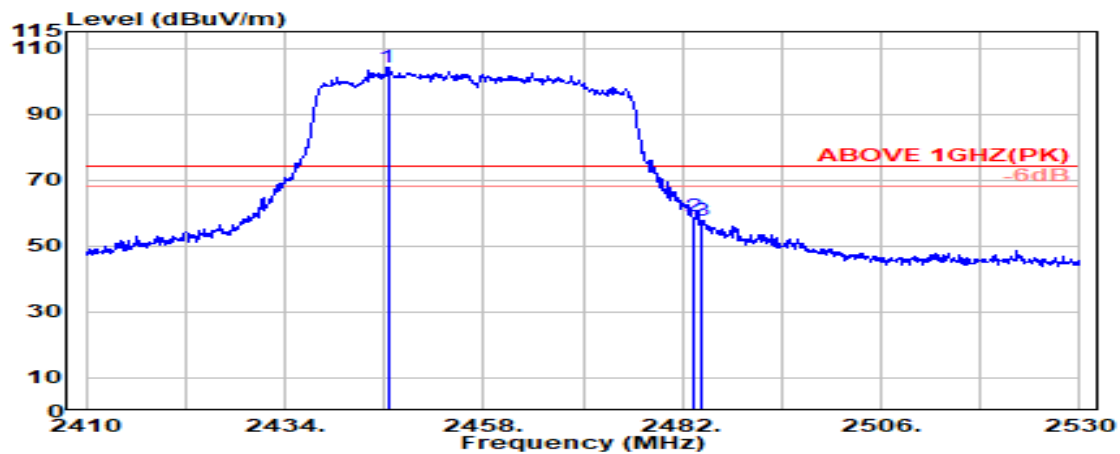

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2446.436	28.29	5.79	39.87	110.10	104.30	---	---	Peak
2483.500	28.37	5.83	39.87	64.79	59.11	74.00	14.89	Peak
2484.400	28.37	5.83	39.87	63.38	57.71	74.00	16.29	Peak

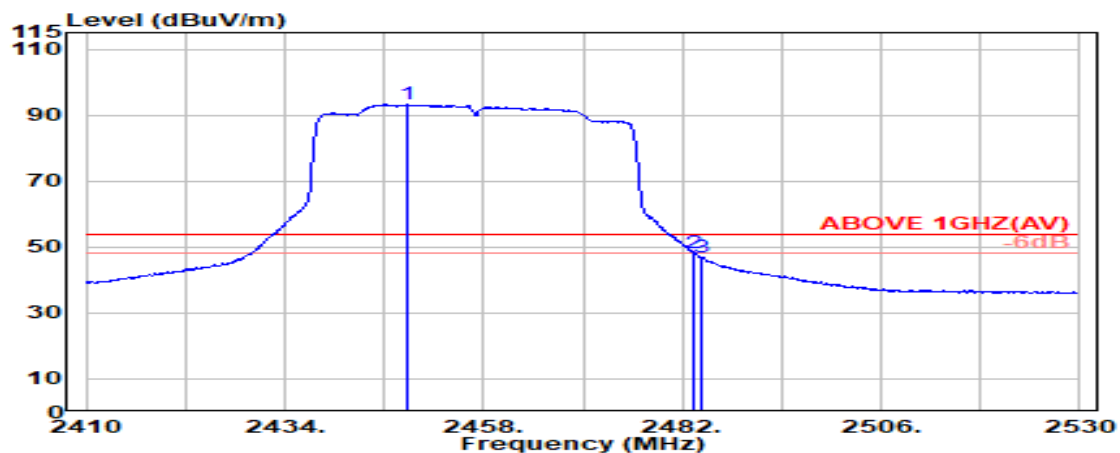

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.836	28.30	5.79	39.87	98.95	93.16	---	---	Average
2483.500	28.37	5.83	39.87	53.68	48.01	54.00	5.99	Average
2484.400	28.37	5.83	39.87	52.58	46.91	54.00	7.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

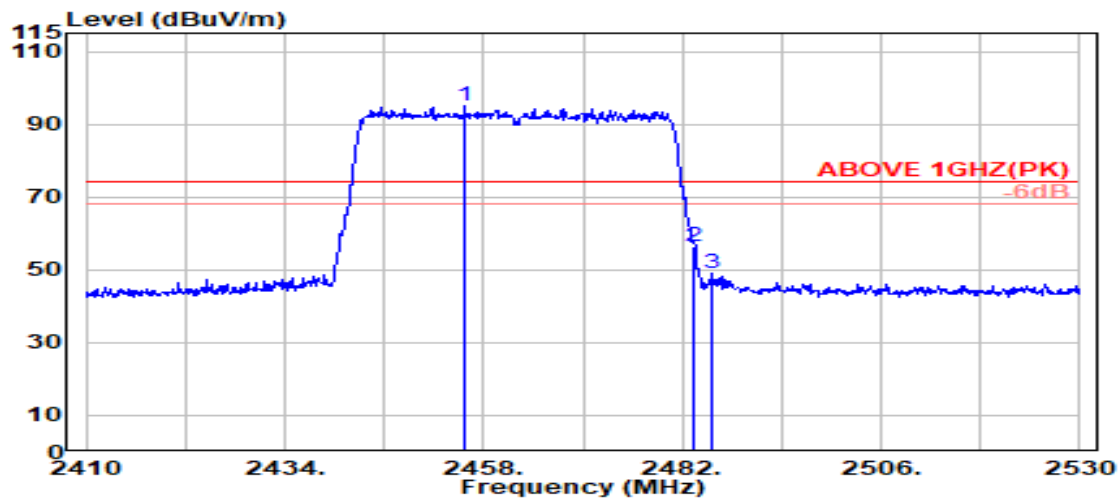

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.709	28.31	5.80	39.87	100.66	94.90	---	---	Peak
2483.500	28.37	5.83	39.87	62.29	56.62	74.00	17.38	Peak
2485.600	28.37	5.83	39.87	54.53	48.86	74.00	25.14	Peak

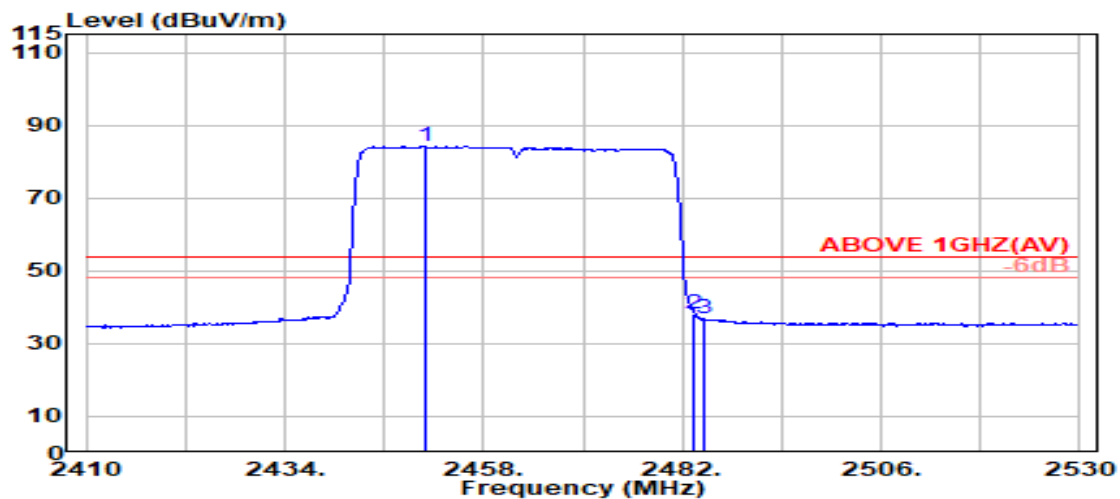

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.018	28.30	5.79	39.87	89.99	84.21	---	---	Average
2483.500	28.37	5.83	39.87	43.89	38.22	54.00	15.78	Average
2484.509	28.37	5.83	39.87	42.45	36.78	54.00	17.22	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

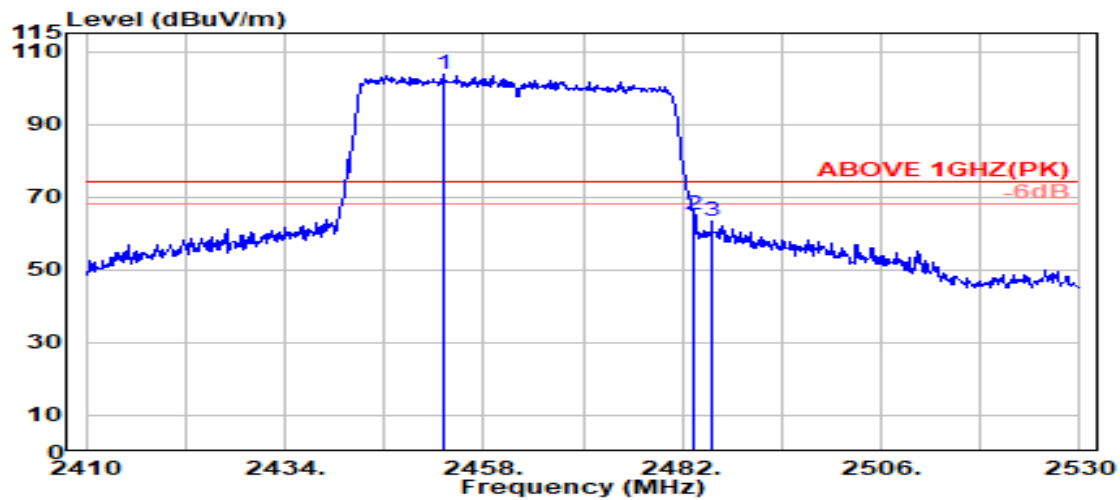

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2453.091	28.31	5.80	39.87	109.66	103.89	---	---	Peak
	2483.500	28.37	5.83	39.87	70.68	65.01	74.00	8.99	Peak
	2485.600	28.37	5.83	39.87	68.91	63.24	74.00	10.76	Peak

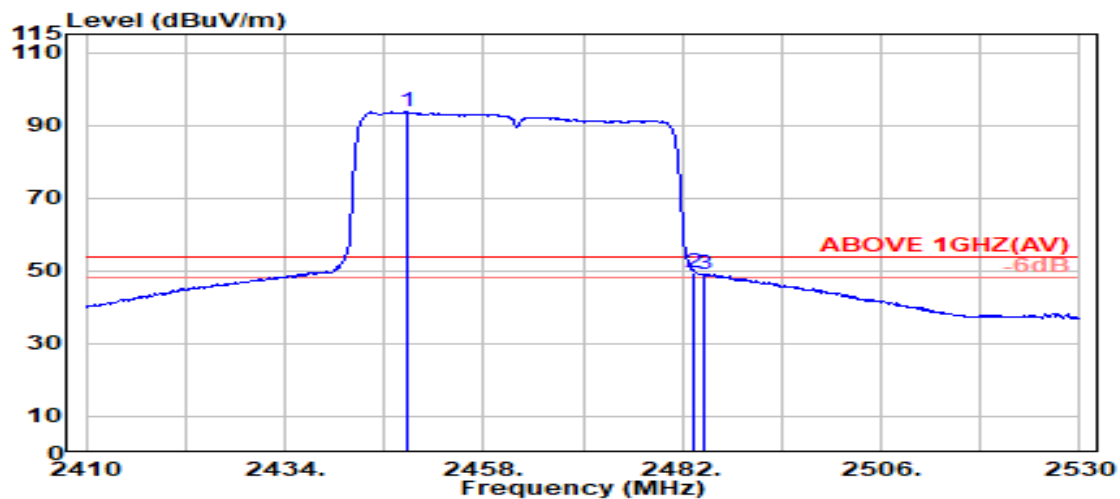

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2448.727	28.29	5.79	39.87	99.60	93.81	---	---	Average
	2483.500	28.37	5.83	39.87	55.31	49.64	54.00	4.36	Average
	2484.509	28.37	5.83	39.87	54.74	49.07	54.00	4.93	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

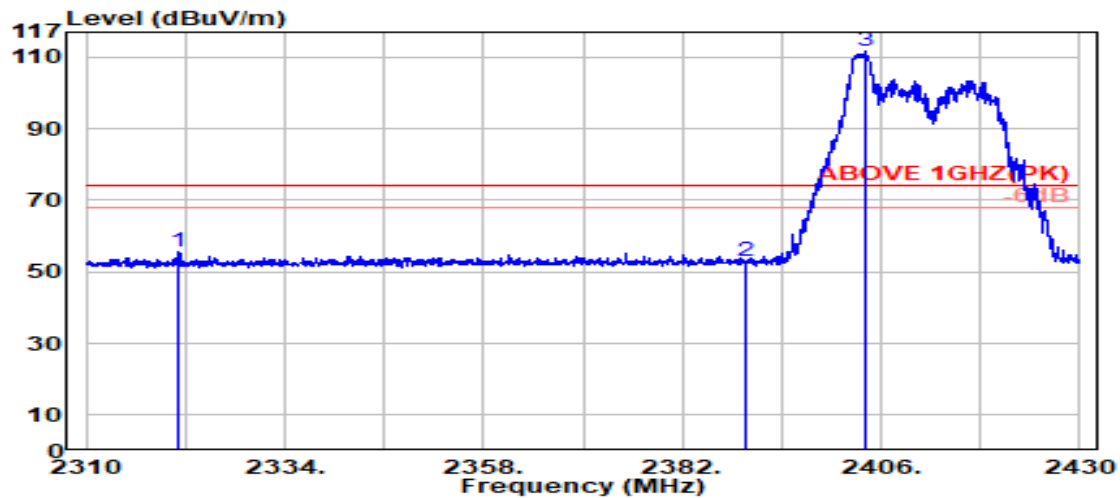

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2321.250	28.13	5.64	39.88	61.59	55.47	74.00	18.53	Peak
2389.800	28.14	5.72	39.88	59.19	53.17	74.00	20.83	Peak
@ 2404.200	28.12	5.74	39.88	117.88	111.86	---	---	Peak

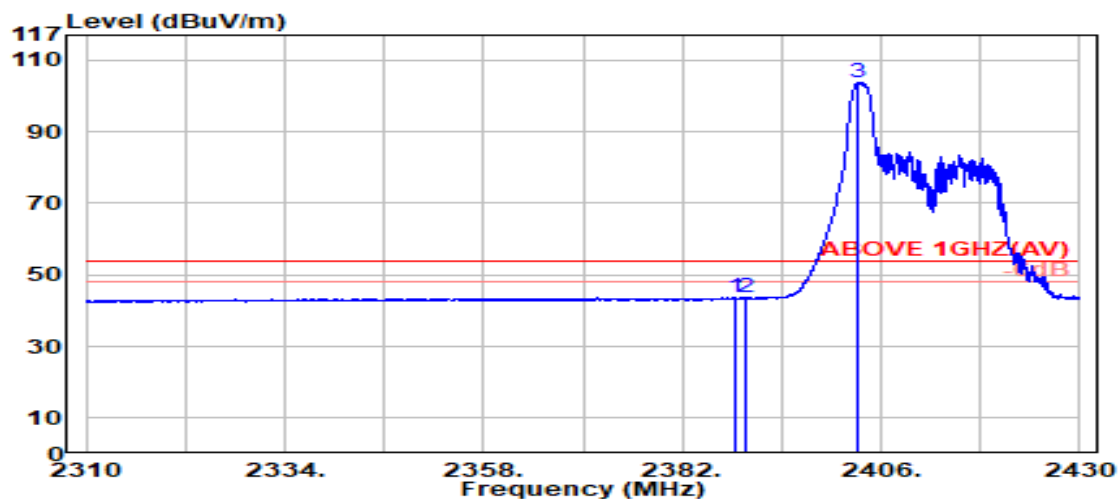

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.250	28.15	5.72	39.88	49.60	43.59	54.00	10.41	Average
2389.800	28.14	5.72	39.88	49.53	43.52	54.00	10.48	Average
@ 2403.250	28.11	5.74	39.88	109.72	103.69	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

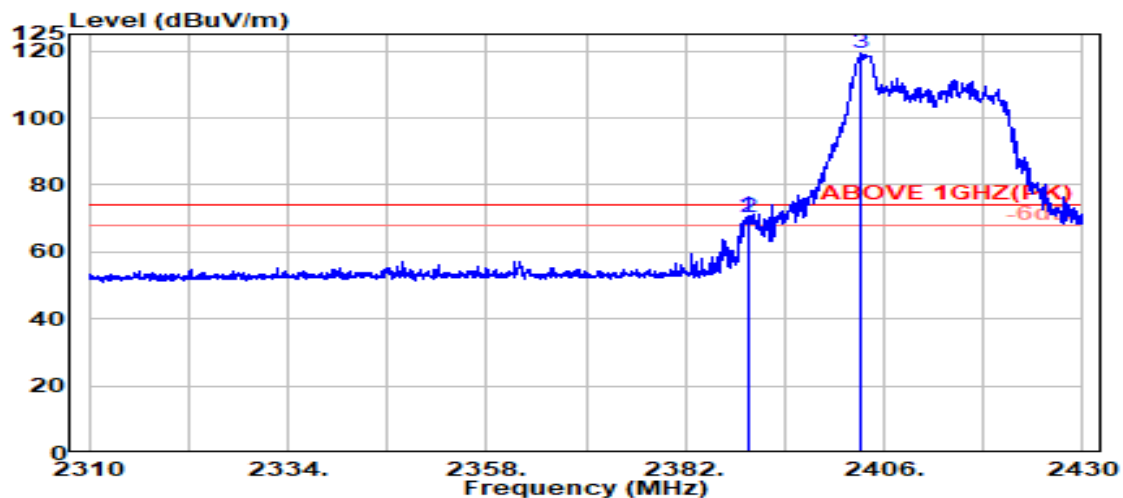

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	76.68	70.66	74.00	3.34	Peak
2389.800	28.14	5.72	39.88	76.21	70.19	74.00	3.81	Peak
@ 2403.150	28.11	5.74	39.88	125.16	119.13	---	---	Peak

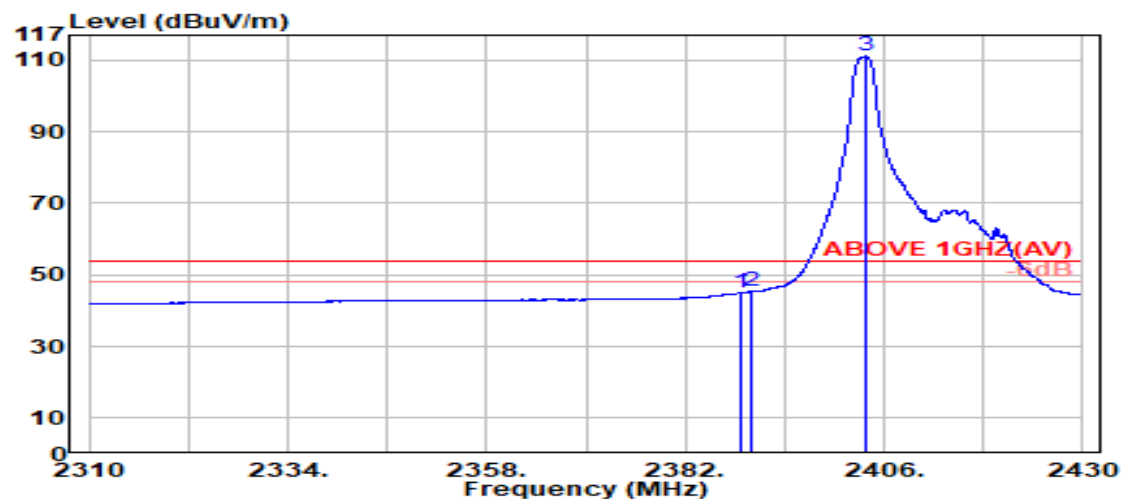

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.650	28.15	5.72	39.88	50.95	44.94	54.00	9.06	Average
2390.000	28.14	5.72	39.88	51.33	45.32	54.00	8.68	Average
@ 2403.950	28.12	5.74	39.88	117.08	111.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

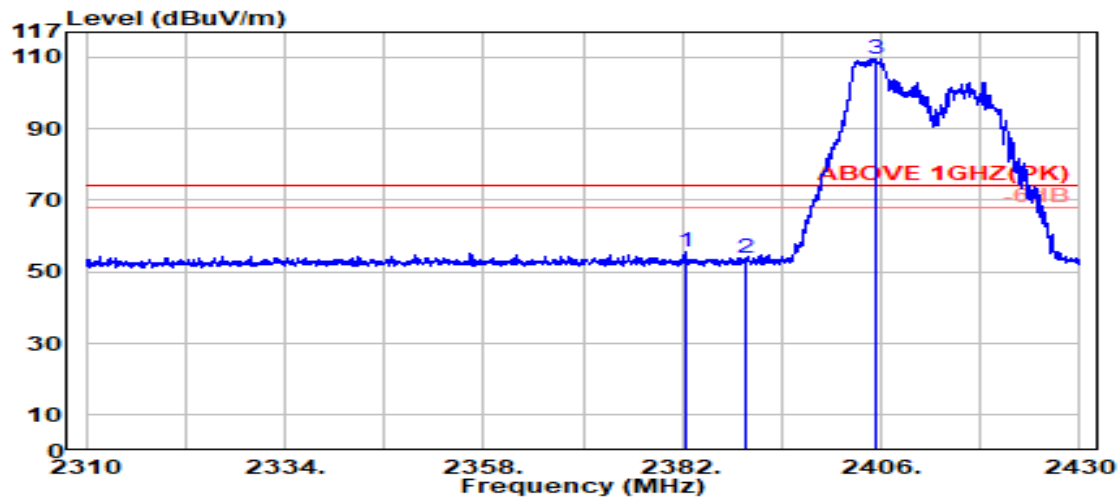

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2382.300	28.17	5.71	39.88	61.66	55.66	74.00	18.34	Peak
2389.800	28.14	5.72	39.88	59.95	53.93	74.00	20.07	Peak
@ 2405.250	28.12	5.74	39.88	115.57	109.55	---	---	Peak

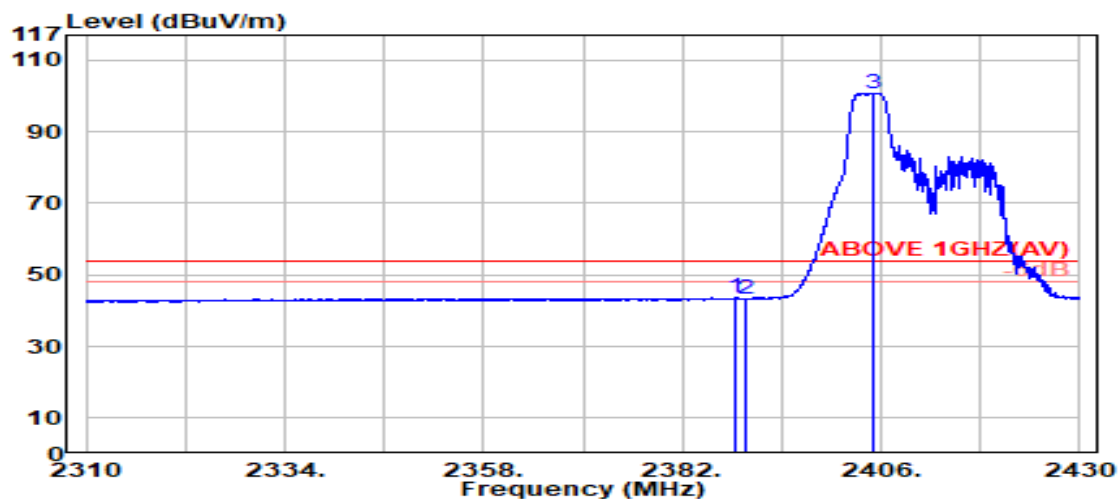

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.250	28.15	5.72	39.88	49.58	43.56	54.00	10.44	Average
2389.800	28.14	5.72	39.88	49.32	43.31	54.00	10.69	Average
@ 2405.000	28.12	5.74	39.88	106.88	100.86	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

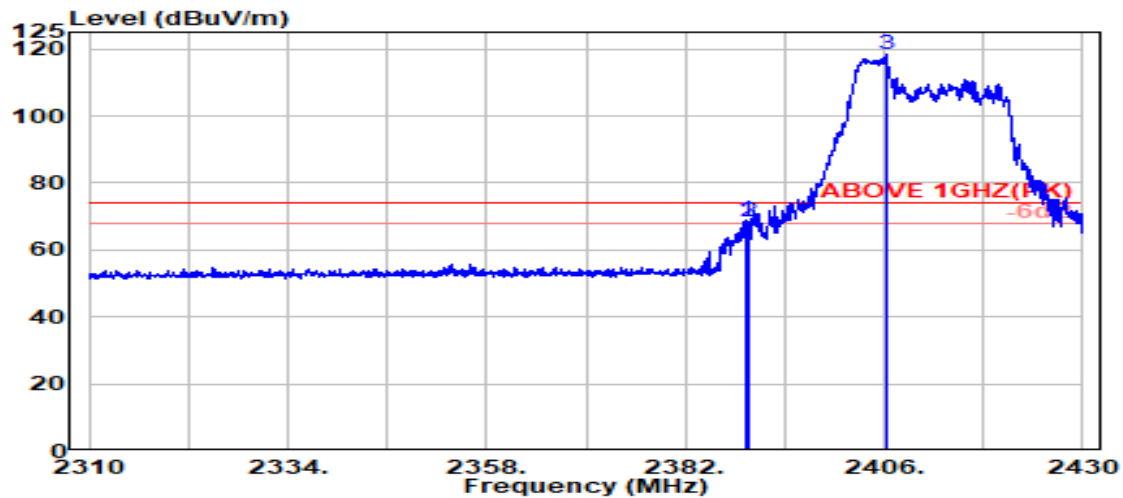

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	75.05	69.03	74.00	4.97	Peak
2389.800	28.14	5.72	39.88	74.36	68.35	74.00	5.65	Peak
@ 2406.250	28.13	5.74	39.88	124.39	118.38	---	---	Peak

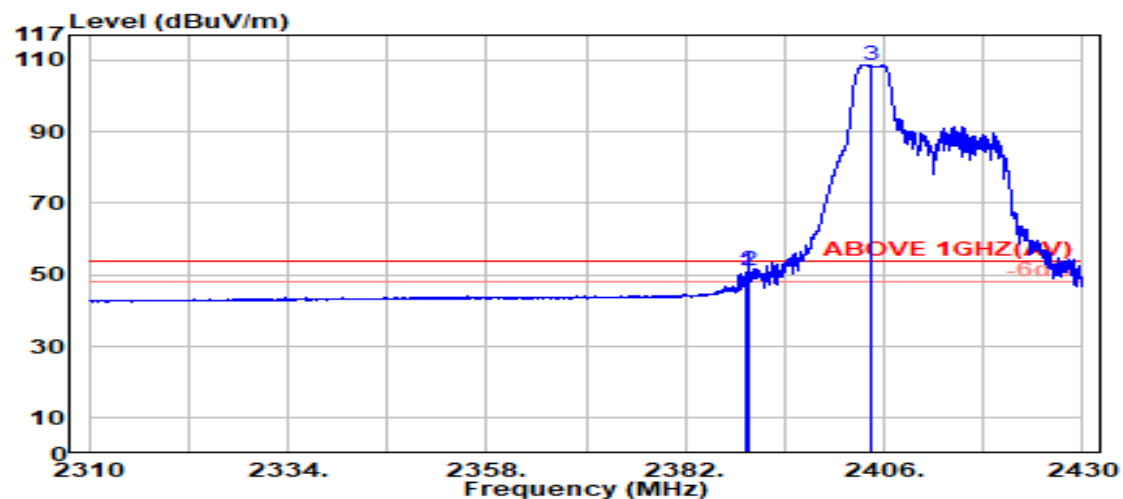

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	56.83	50.81	54.00	3.19	Average
2389.800	28.14	5.72	39.88	57.09	51.07	54.00	2.93	Average
@ 2404.400	28.12	5.74	39.88	114.74	108.72	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

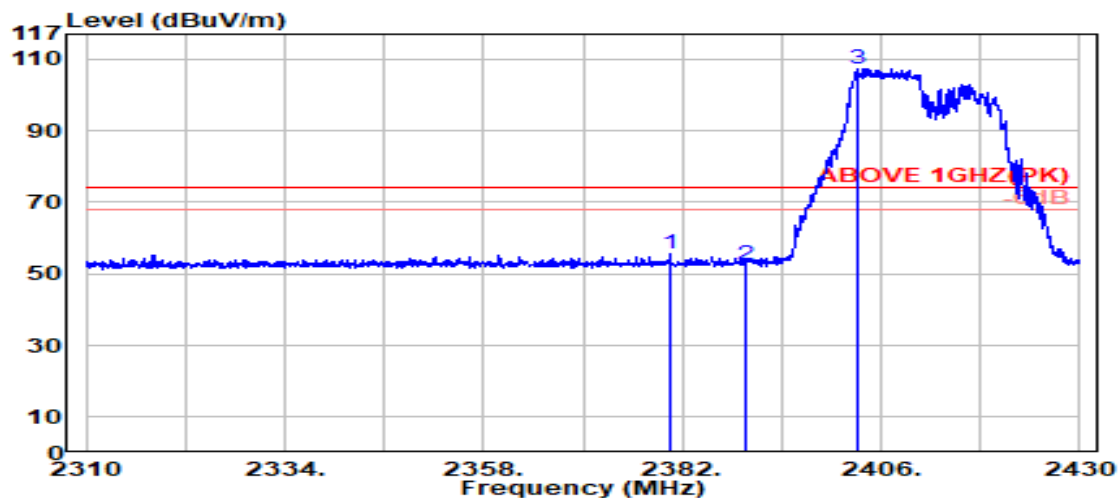

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.450	28.18	5.71	39.88	61.40	55.41	74.00	18.59	Peak
2389.800	28.14	5.72	39.88	58.50	52.48	74.00	21.52	Peak
@ 2403.100	28.11	5.74	39.88	113.48	107.45	---	---	Peak

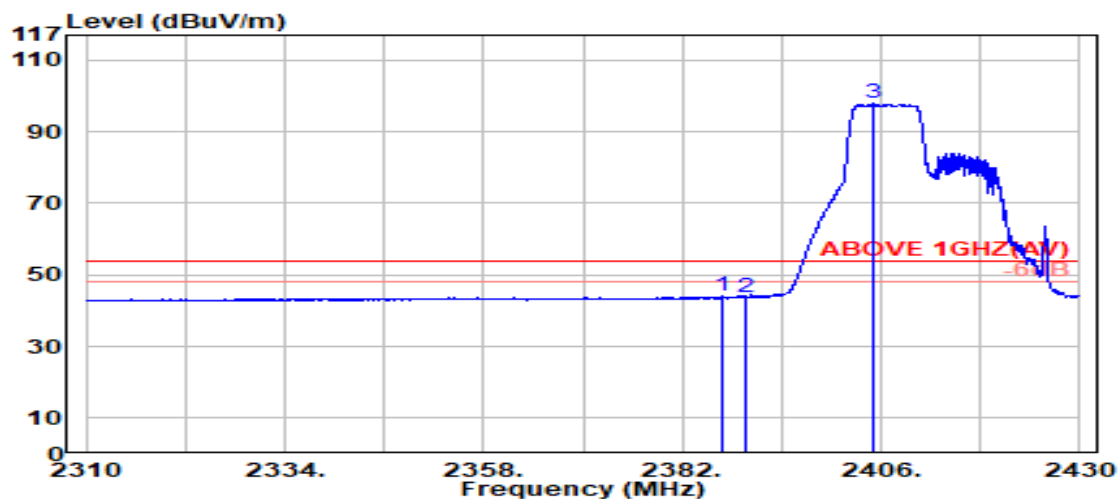

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.700	28.15	5.72	39.88	50.04	44.03	54.00	9.97	Average
2389.800	28.14	5.72	39.88	49.86	43.84	54.00	10.16	Average
@ 2405.100	28.12	5.74	39.88	103.92	97.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

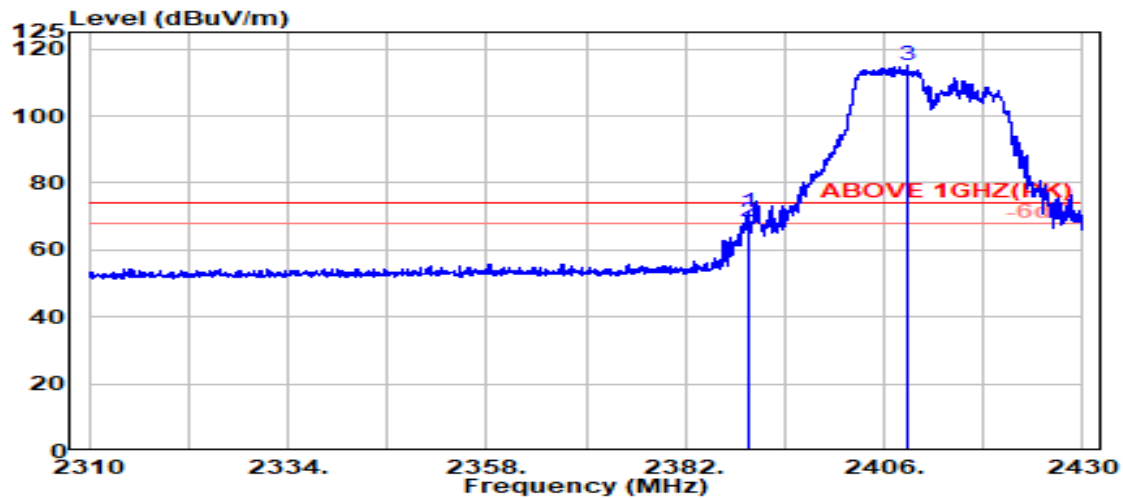

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	77.27	71.25	74.00	2.75	Peak
2389.800	28.14	5.72	39.88	74.63	68.62	74.00	5.38	Peak
@ 2408.750	28.14	5.74	39.88	120.95	114.95	---	---	Peak

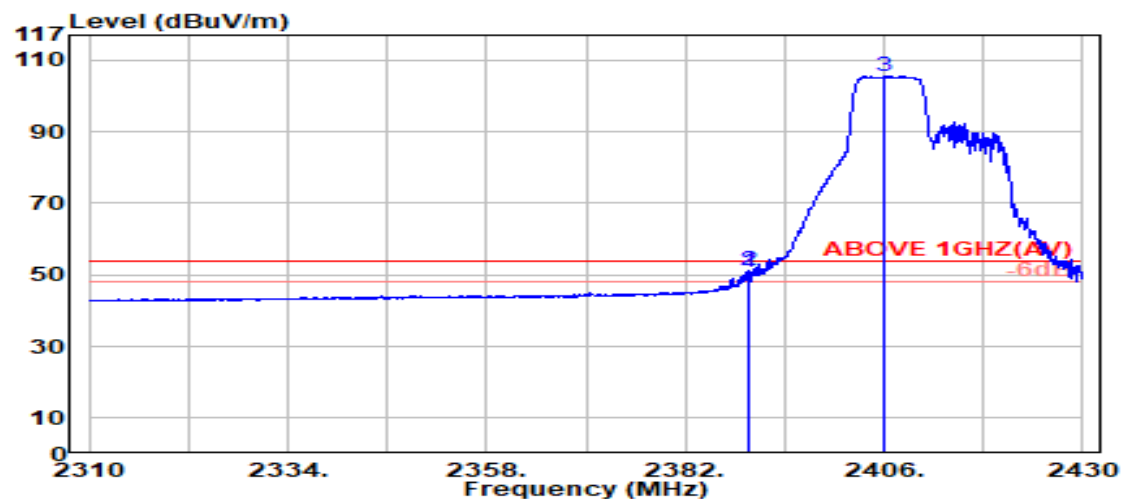

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	56.86	50.84	54.00	3.16	Average
2389.800	28.14	5.72	39.88	57.02	51.01	54.00	2.99	Average
@ 2406.000	28.12	5.74	39.88	111.47	105.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

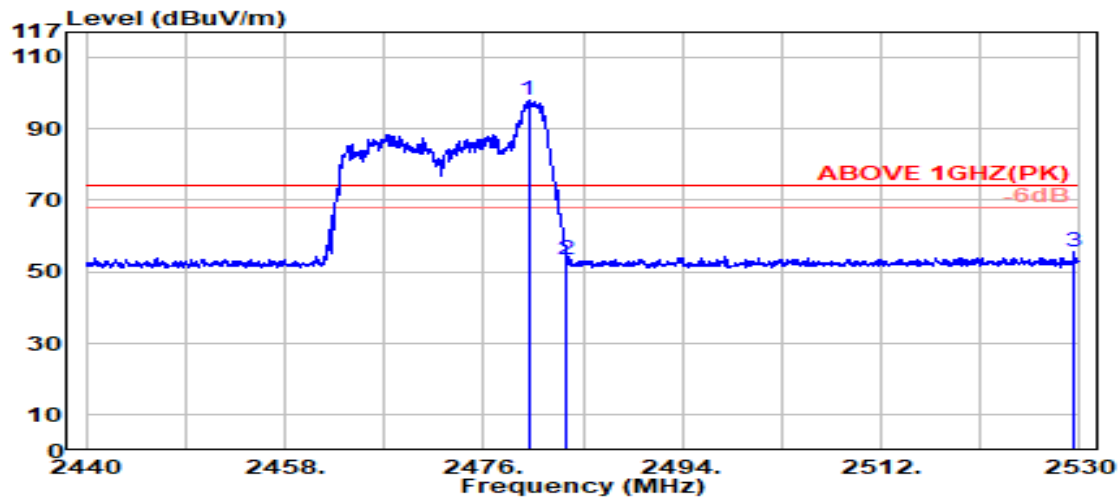

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.050	28.36	5.83	39.87	103.59	97.91	---	---	Peak
	2483.500	28.37	5.83	39.87	59.27	53.59	74.00	20.41	Peak
	2529.500	28.58	5.89	39.88	60.99	55.58	74.00	18.42	Peak

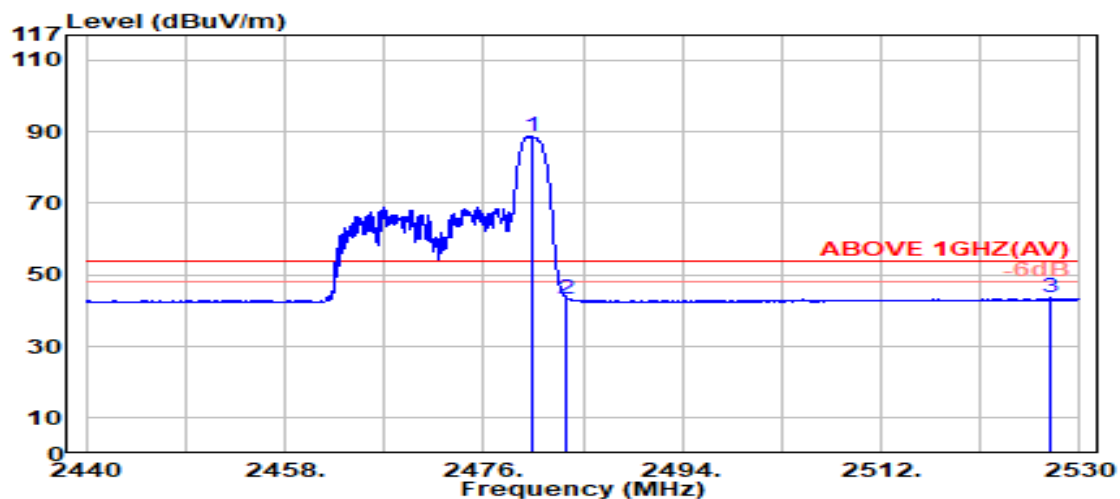

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	28.36	5.83	39.87	94.57	88.89	---	---	Average
	2483.500	28.37	5.83	39.87	49.16	43.48	54.00	10.52	Average
	2527.400	28.57	5.88	39.88	49.15	43.72	54.00	10.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

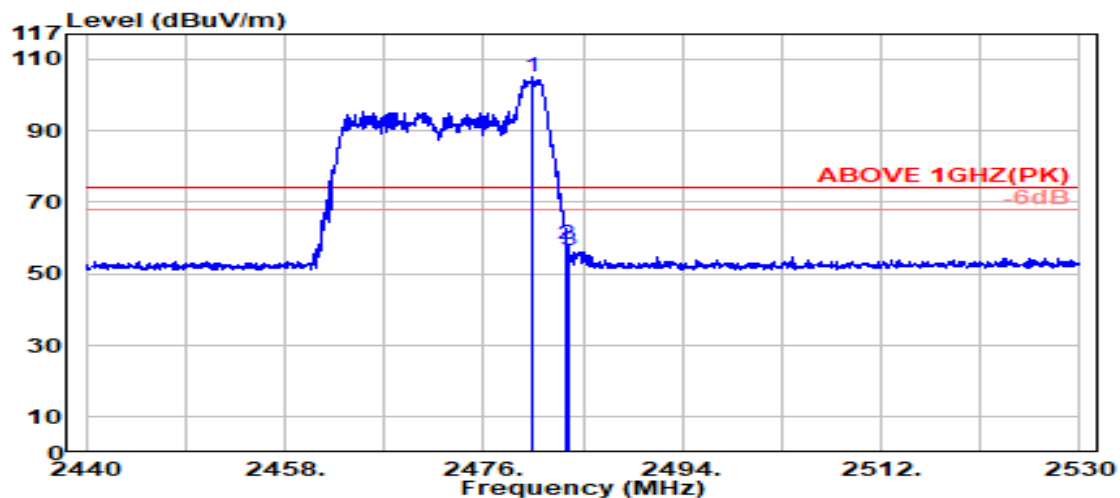

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.450	28.36	5.83	39.87	110.79	105.11	---	---	Peak
2483.500	28.37	5.83	39.87	64.10	58.43	74.00	15.57	Peak
2483.700	28.37	5.83	39.87	62.33	56.66	74.00	17.34	Peak

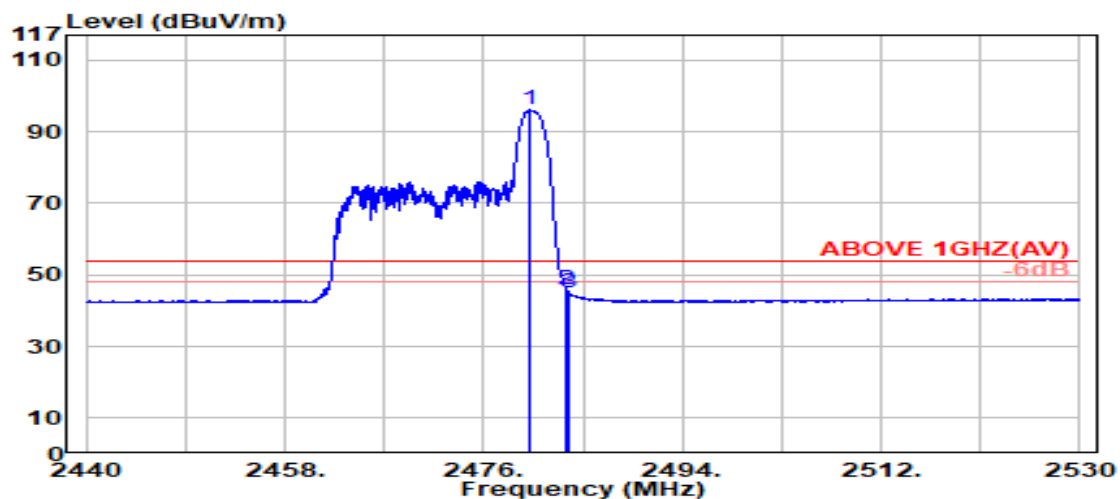

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.150	28.36	5.83	39.87	101.80	96.12	---	---	Average
2483.500	28.37	5.83	39.87	51.47	45.80	54.00	8.20	Average
2483.700	28.37	5.83	39.87	50.73	45.06	54.00	8.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

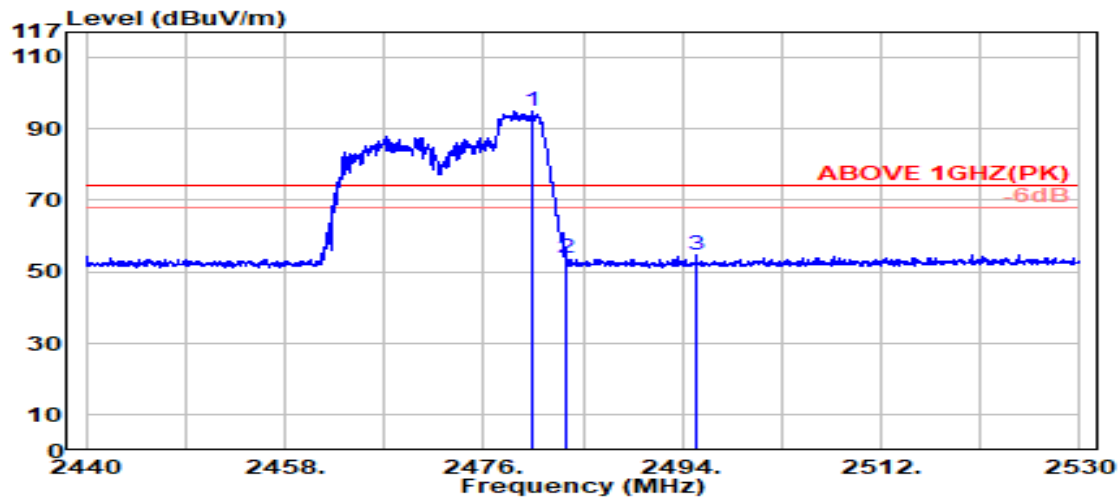

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.400	28.36	5.83	39.87	100.58	94.89	---	---	Peak
	2483.500	28.37	5.83	39.87	59.43	53.75	74.00	20.25	Peak
	2495.200	28.39	5.84	39.87	60.52	54.89	74.00	19.11	Peak

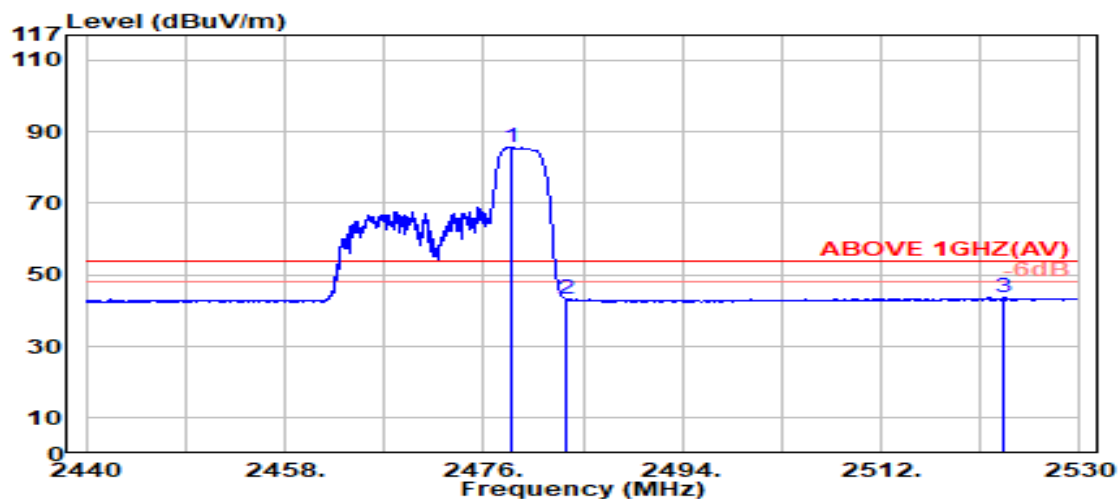

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.600	28.36	5.83	39.87	91.40	85.71	---	---	Average
	2483.500	28.37	5.83	39.87	48.87	43.20	54.00	10.80	Average
	2523.150	28.54	5.88	39.88	49.11	43.65	54.00	10.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

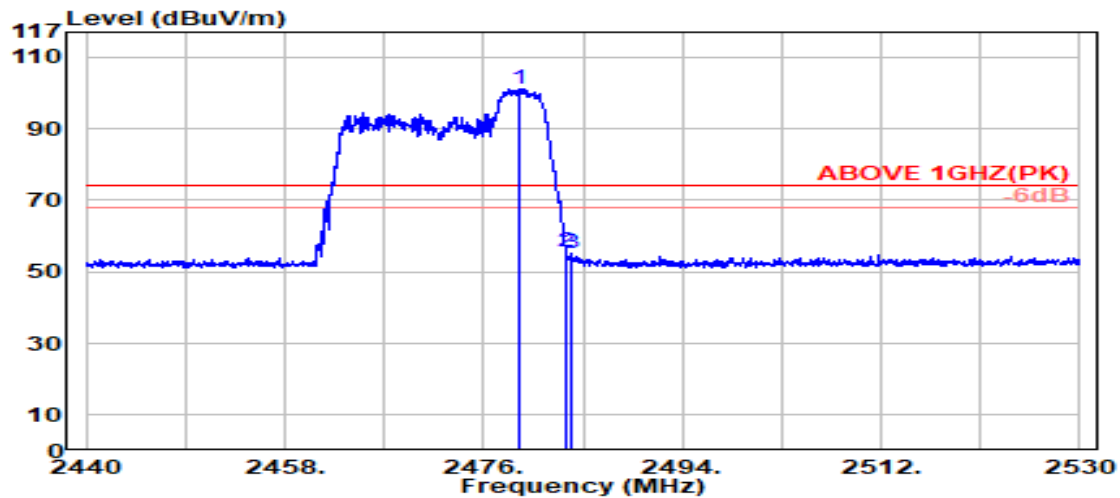

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.36	5.83	39.87	106.93	101.25	---	---	Peak
2483.500	28.37	5.83	39.87	61.35	55.68	74.00	18.32	Peak
2484.000	28.37	5.83	39.87	60.66	54.99	74.00	19.01	Peak

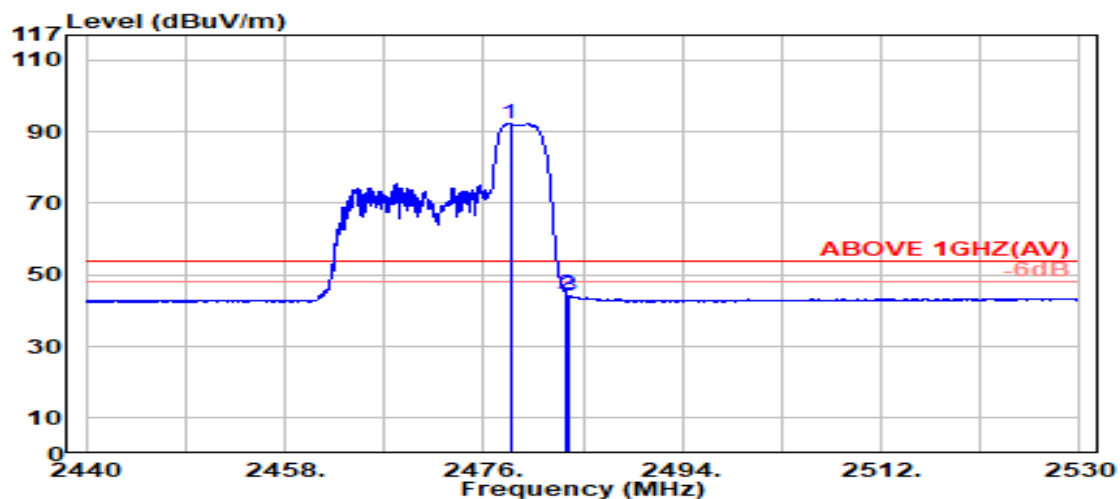

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.36	5.83	39.87	98.09	92.40	---	---	Average
2483.500	28.37	5.83	39.87	50.25	44.57	54.00	9.43	Average
2483.700	28.37	5.83	39.87	49.85	44.18	54.00	9.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

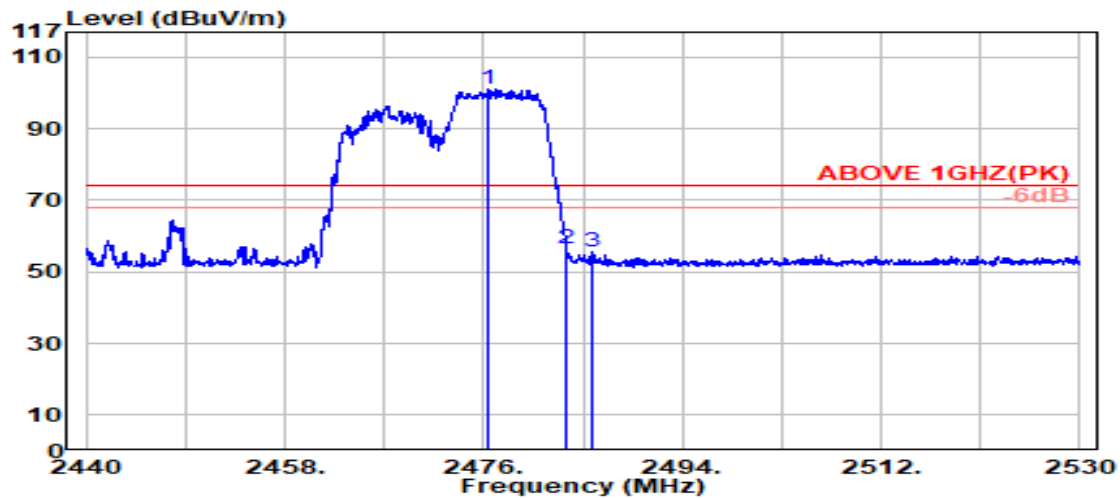

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.350	28.35	5.82	39.87	106.95	101.25	---	---	Peak
2483.500	28.37	5.83	39.87	62.27	56.60	74.00	17.40	Peak
2485.900	28.37	5.83	39.87	61.37	55.70	74.00	18.30	Peak

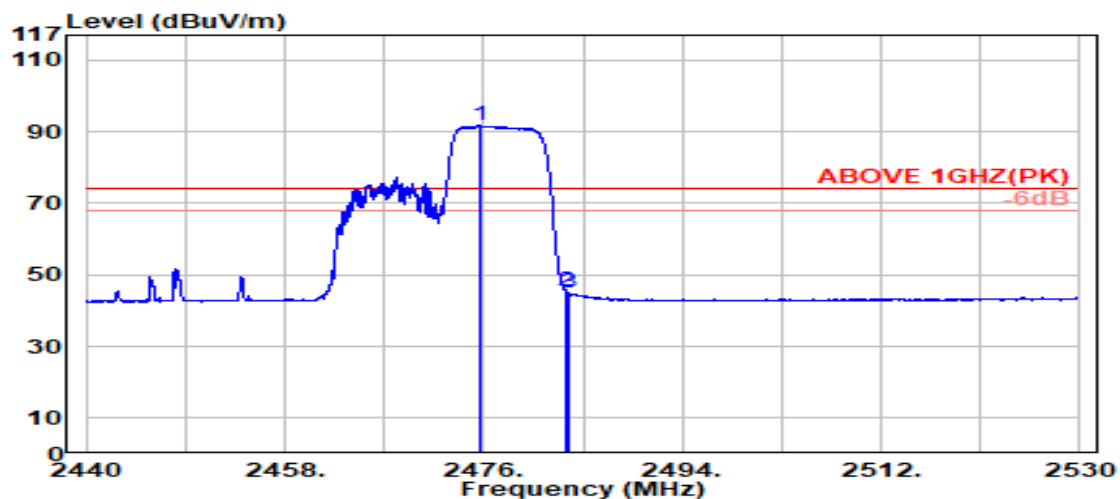

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.750	28.35	5.82	39.87	97.50	91.81	---	---	Average
2483.500	28.37	5.83	39.87	50.93	45.26	74.00	28.74	Average
2483.700	28.37	5.83	39.87	50.71	45.04	74.00	28.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

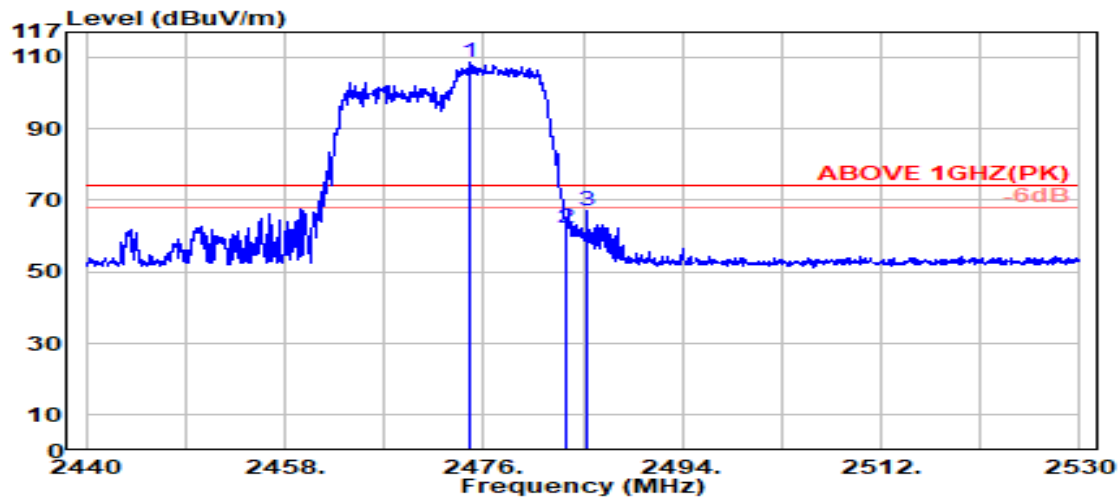

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2474.800	28.35	5.82	39.87	114.42	108.72	---	---	Peak
	2483.500	28.37	5.83	39.87	68.06	62.39	74.00	11.61	Peak
	2485.300	28.37	5.83	39.87	72.70	67.03	74.00	6.97	Peak

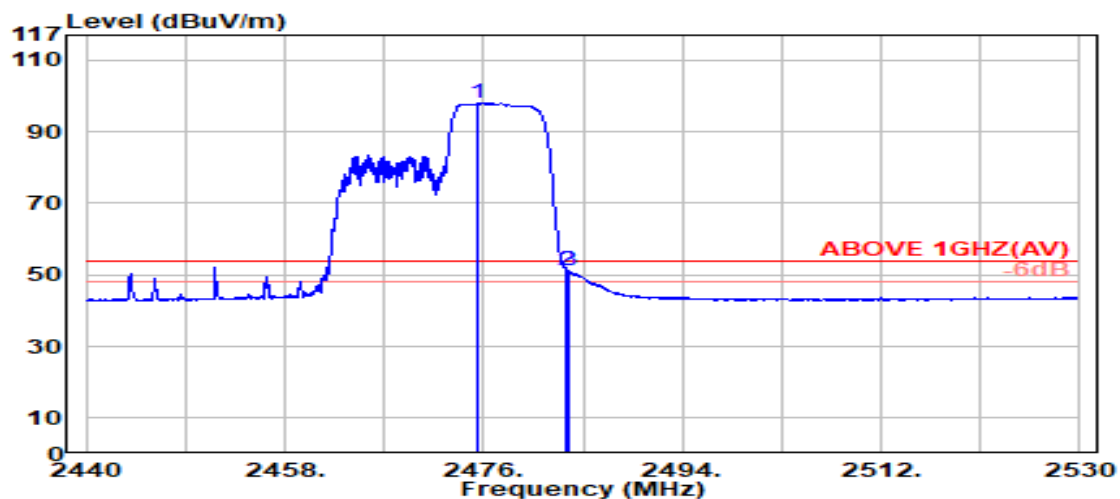

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2475.500	28.35	5.82	39.87	103.76	98.07	---	---	Average
	2483.500	28.37	5.83	39.87	57.08	51.41	54.00	2.59	Average
	2483.750	28.37	5.83	39.87	56.67	51.00	54.00	3.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

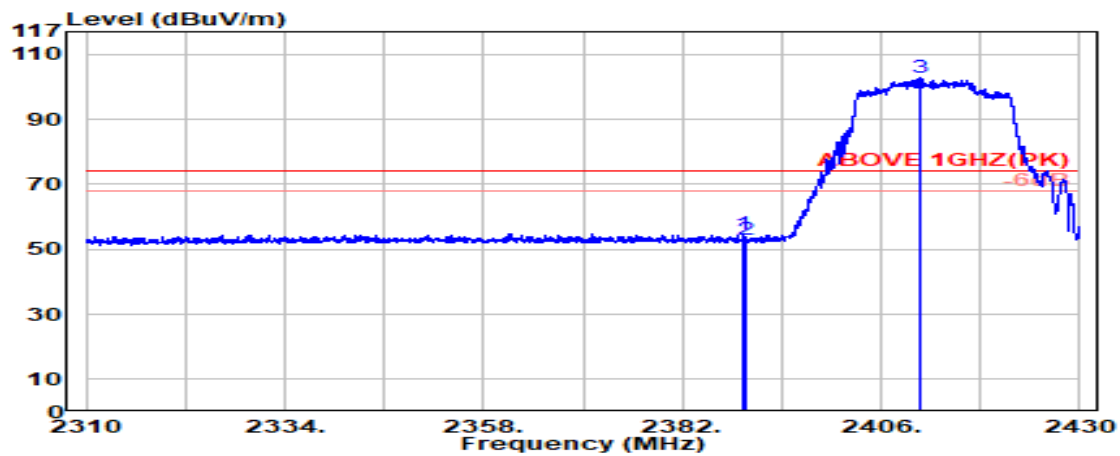

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	60.93	54.92	74.00	19.08	Peak
2389.800	28.14	5.72	39.88	58.78	52.76	74.00	21.24	Peak
@ 2410.750	28.14	5.75	39.88	108.73	102.75	---	---	Peak

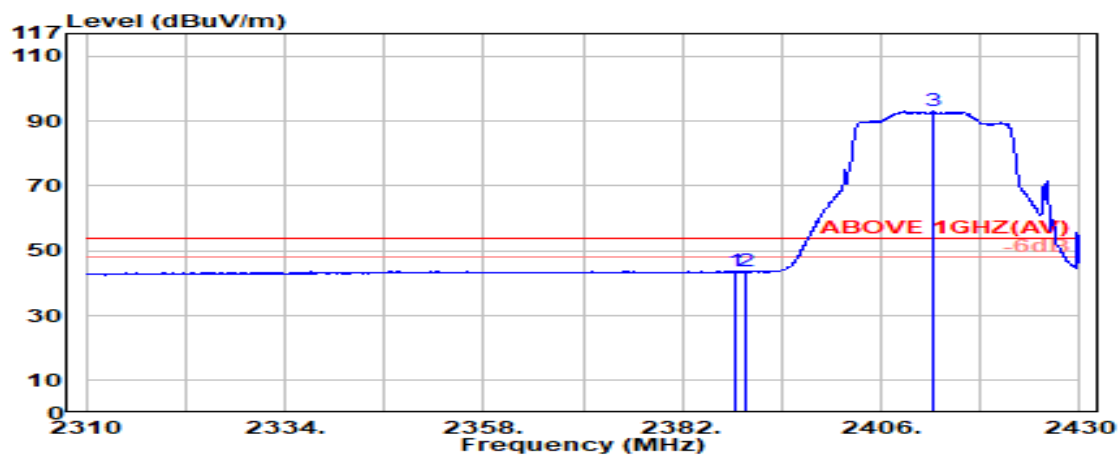

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.88	49.84	43.83	54.00	10.17	Average
2389.800	28.14	5.72	39.88	49.66	43.65	54.00	10.35	Average
@ 2412.400	28.15	5.75	39.88	98.99	93.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

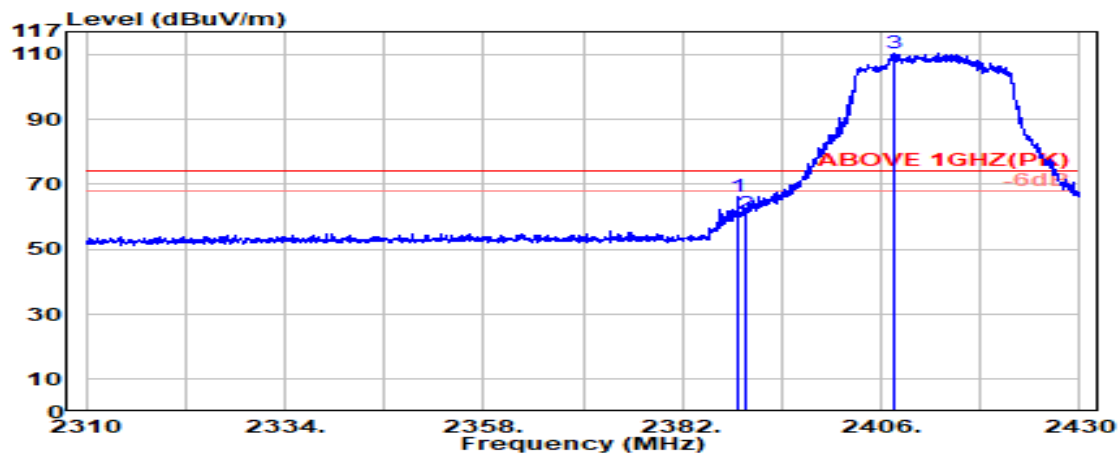

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.88	72.08	66.06	74.00	7.94	Peak
2389.800	28.14	5.72	39.88	66.84	60.83	74.00	13.17	Peak
@ 2407.700	28.13	5.74	39.88	116.38	110.37	---	---	Peak

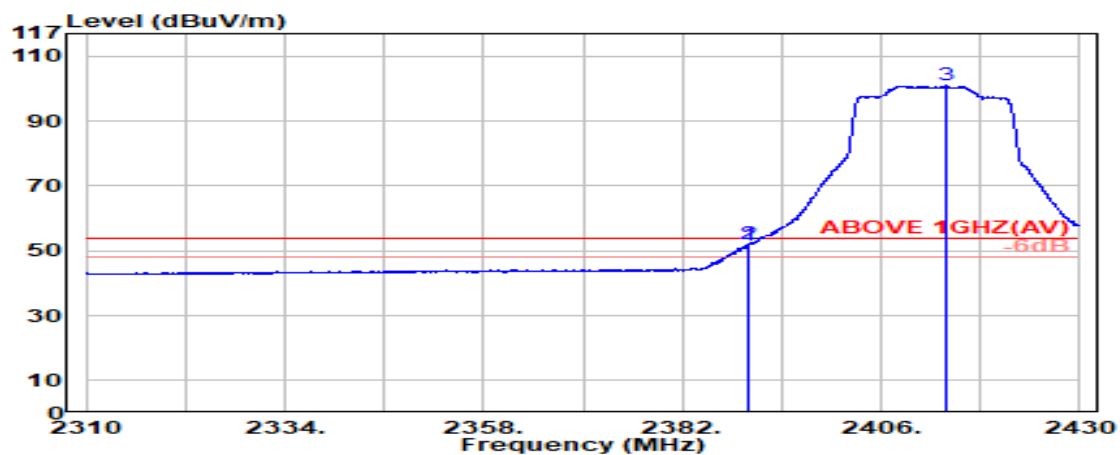

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	28.14	5.72	39.88	57.77	51.75	54.00	2.25	Average
2390.000	28.14	5.72	39.88	58.22	52.21	54.00	1.79	Average
@ 2413.800	28.16	5.75	39.88	106.87	100.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

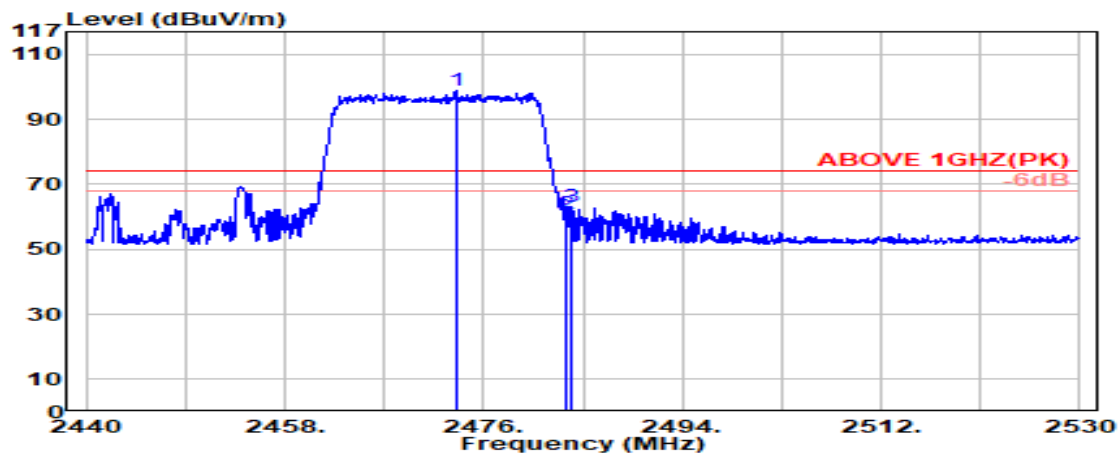

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.550	28.35	5.82	39.87	104.44	98.73	---	---	Peak
2483.500	28.37	5.83	39.87	66.68	61.01	74.00	12.99	Peak
2484.000	28.37	5.83	39.87	69.01	63.34	74.00	10.66	Peak

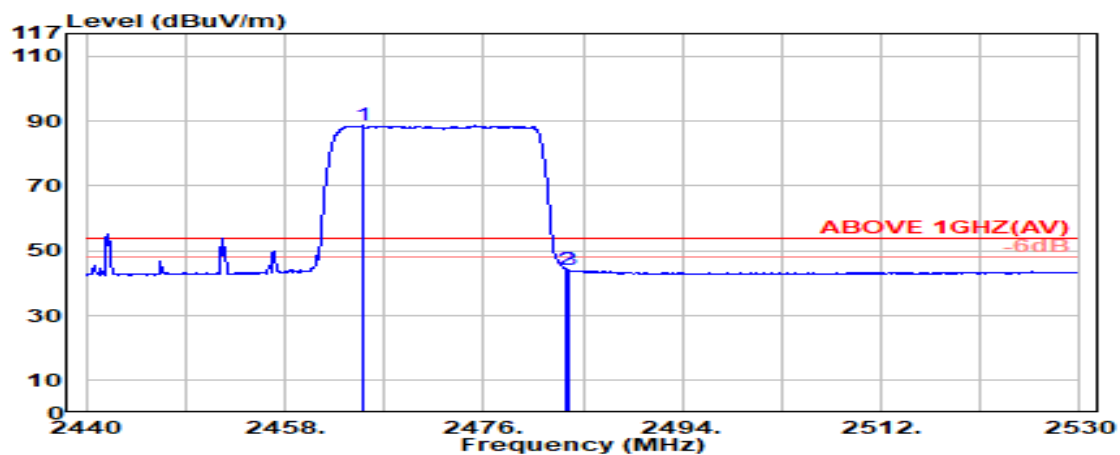

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.33	5.81	39.87	94.32	88.59	---	---	Average
2483.500	28.37	5.83	39.87	49.91	44.24	54.00	9.76	Average
2483.700	28.37	5.83	39.87	49.82	44.15	54.00	9.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

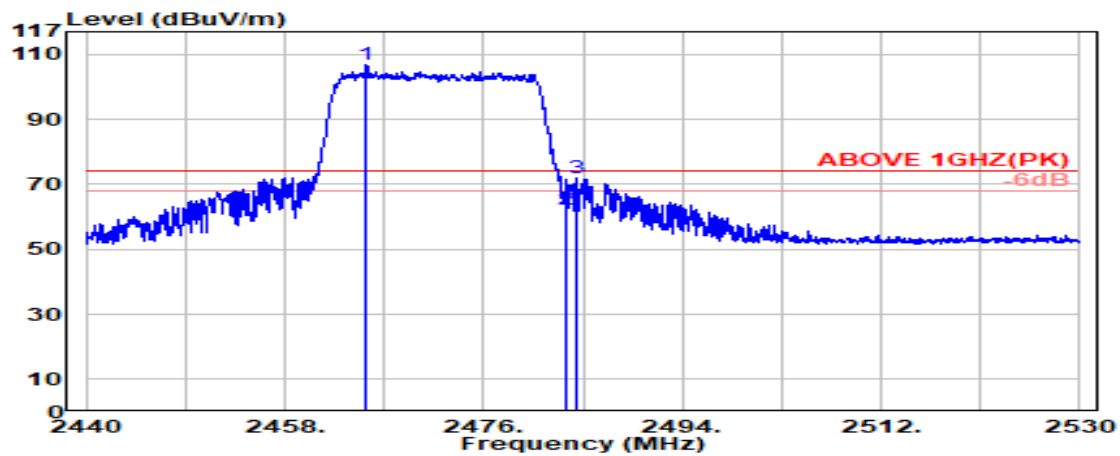

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.33	5.81	39.87	112.62	106.88	---	---	Peak
2483.500	28.37	5.83	39.87	68.11	62.44	74.00	11.56	Peak
2484.400	28.37	5.83	39.87	77.44	71.77	74.00	2.23	Peak

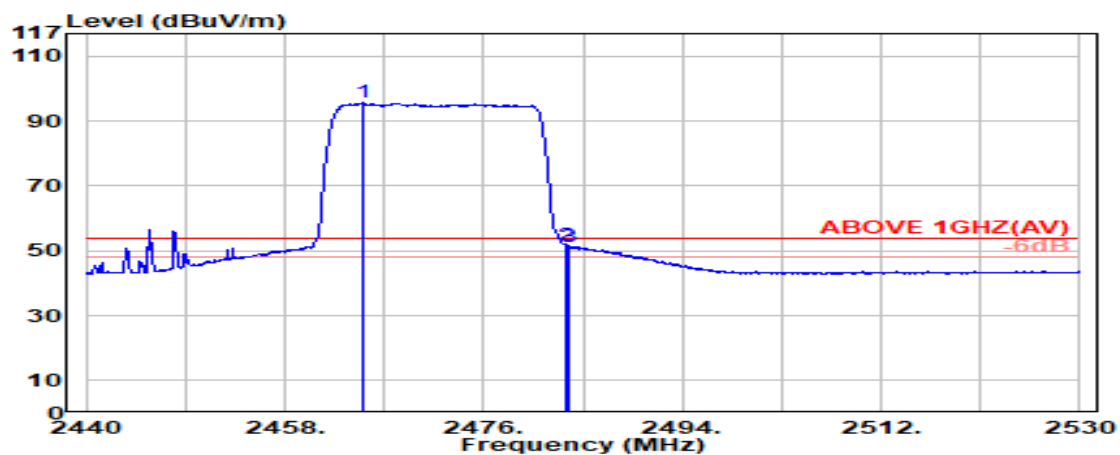

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.33	5.81	39.87	101.45	95.72	---	---	Average
2483.500	28.37	5.83	39.87	57.52	51.85	54.00	2.15	Average
2483.700	28.37	5.83	39.87	56.96	51.28	54.00	2.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

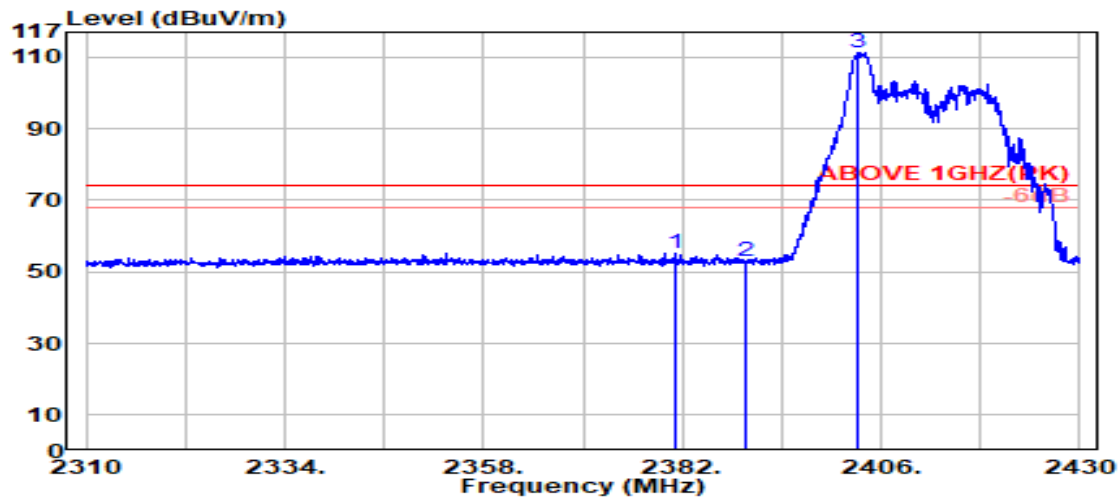

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2381.100	28.18	5.71	39.88	61.38	55.39	74.00	18.61	Peak
2389.800	28.14	5.72	39.88	59.15	53.13	74.00	20.87	Peak
@ 2403.300	28.11	5.74	39.88	117.29	111.26	---	---	Peak

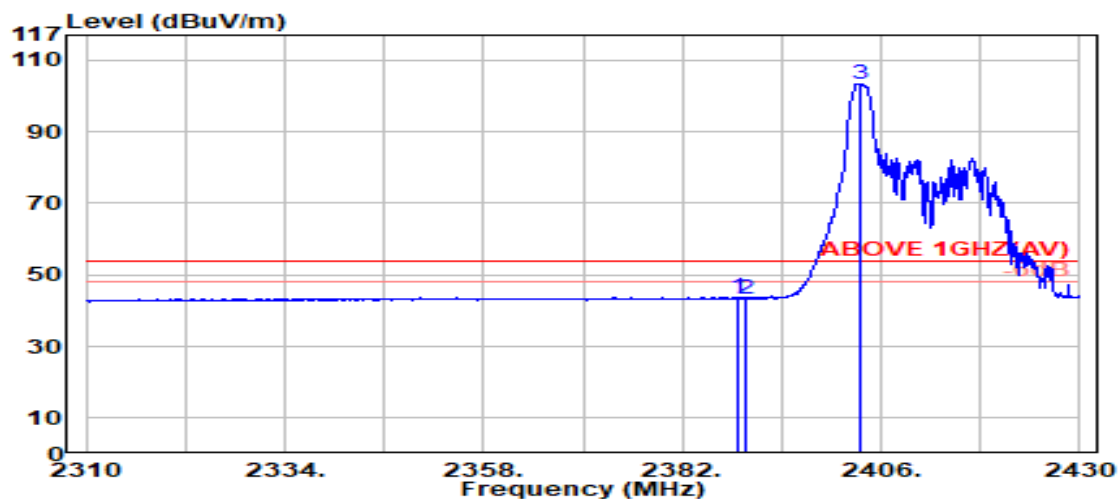

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.88	49.80	43.78	54.00	10.22	Average
2389.800	28.14	5.72	39.88	49.45	43.43	54.00	10.57	Average
@ 2403.350	28.11	5.74	39.88	109.41	103.39	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

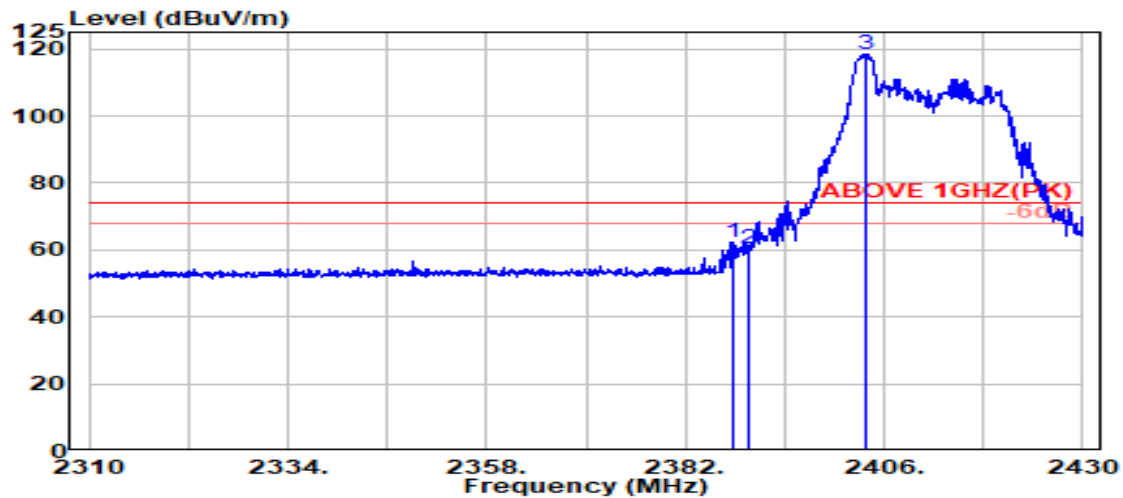

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.650	28.15	5.72	39.88	68.48	62.47	74.00	11.53	Peak
2389.800	28.14	5.72	39.88	66.61	60.60	74.00	13.40	Peak
@ 2403.900	28.12	5.74	39.88	124.64	118.62	---	---	Peak

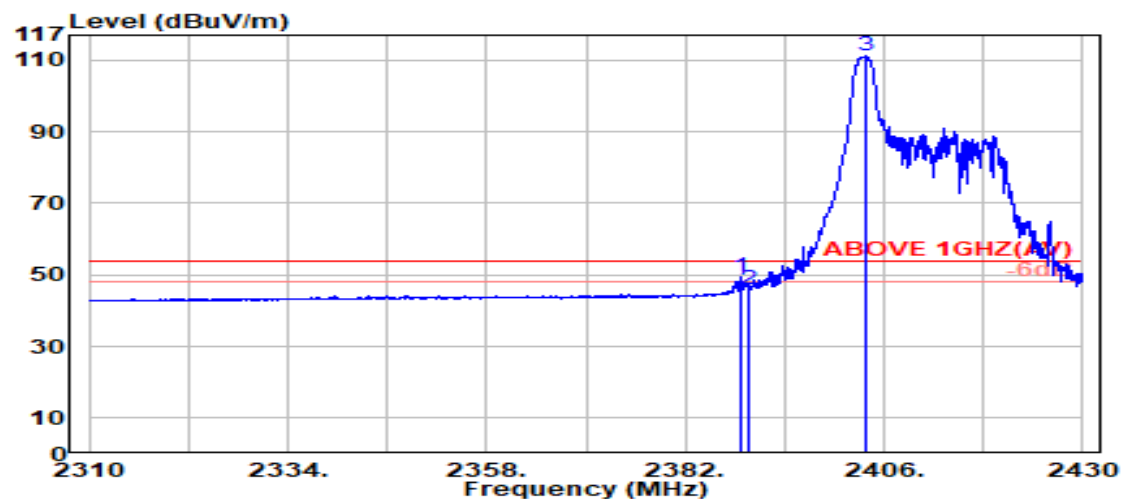

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.14	5.72	39.88	55.25	49.23	54.00	4.77	Average
2389.800	28.14	5.72	39.88	52.07	46.05	54.00	7.95	Average
@ 2403.850	28.12	5.74	39.88	117.22	111.20	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

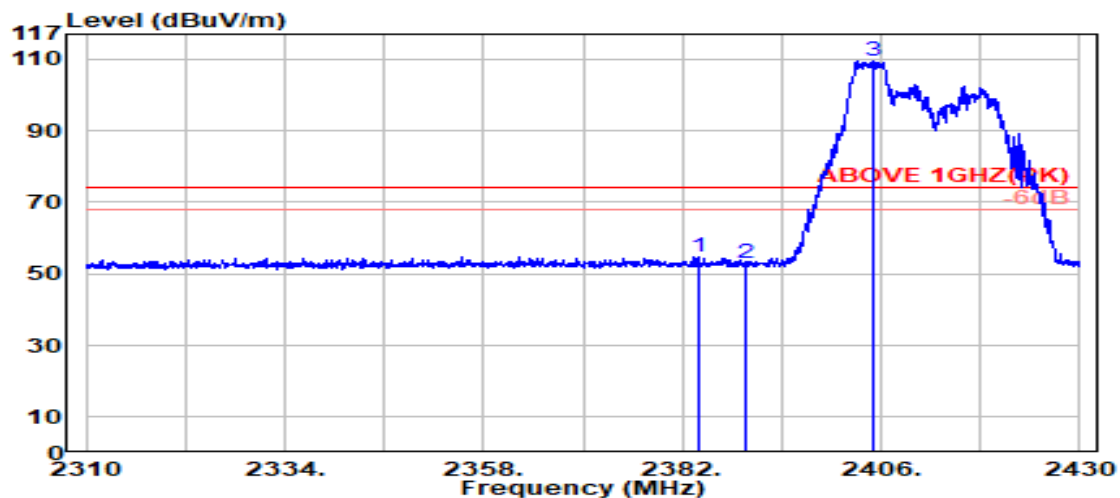

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2383.850	28.16	5.71	39.88	60.74	54.74	74.00	19.26	Peak
2389.800	28.14	5.72	39.88	59.05	53.03	74.00	20.97	Peak
@ 2405.150	28.12	5.74	39.88	115.49	109.47	---	---	Peak

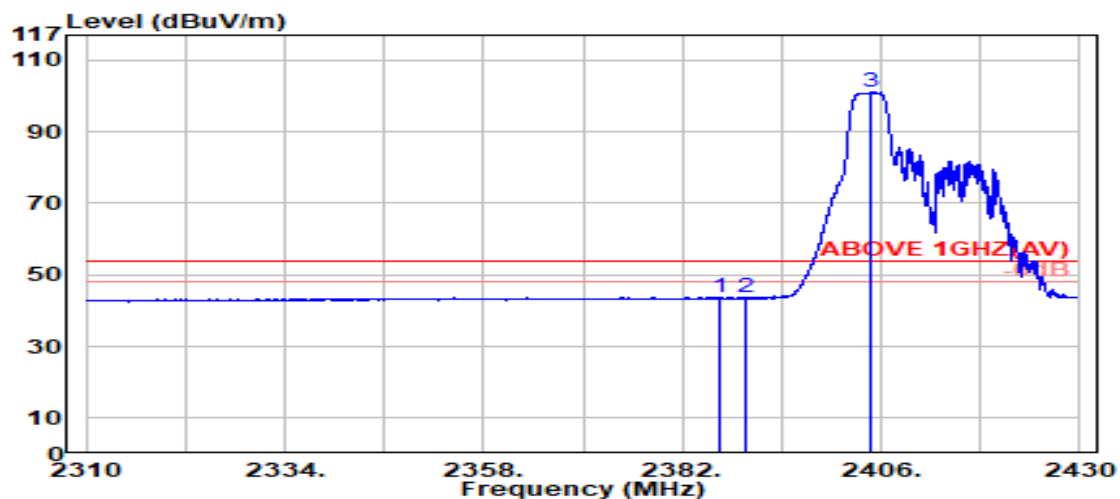

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.650	28.15	5.72	39.88	49.84	43.83	54.00	10.17	Average
2389.800	28.14	5.72	39.88	49.60	43.58	54.00	10.42	Average
@ 2404.850	28.12	5.74	39.88	107.07	101.06	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

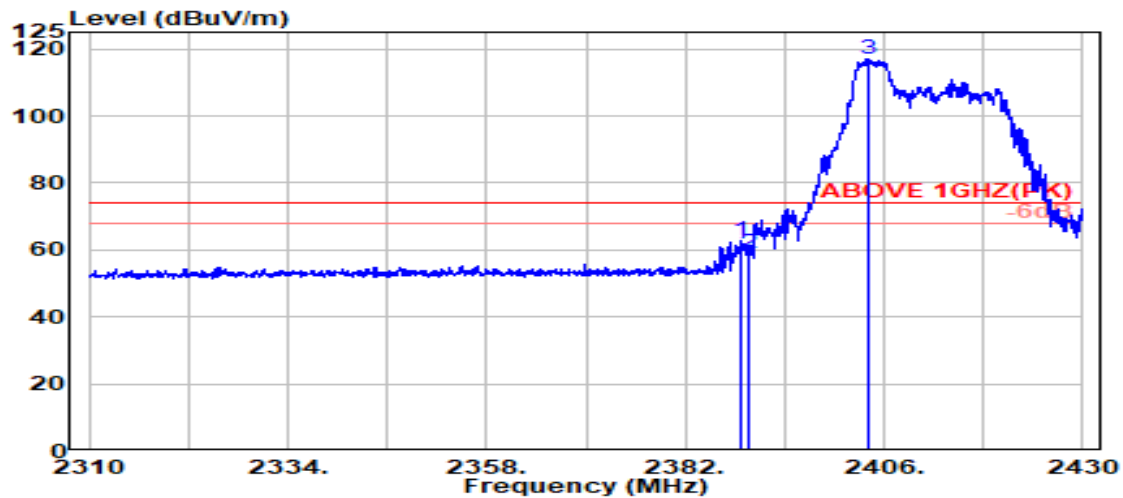

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.14	5.72	39.88	68.70	62.68	74.00	11.32	Peak
2389.800	28.14	5.72	39.88	64.90	58.89	74.00	15.11	Peak
@ 2404.050	28.12	5.74	39.88	123.06	117.03	---	---	Peak

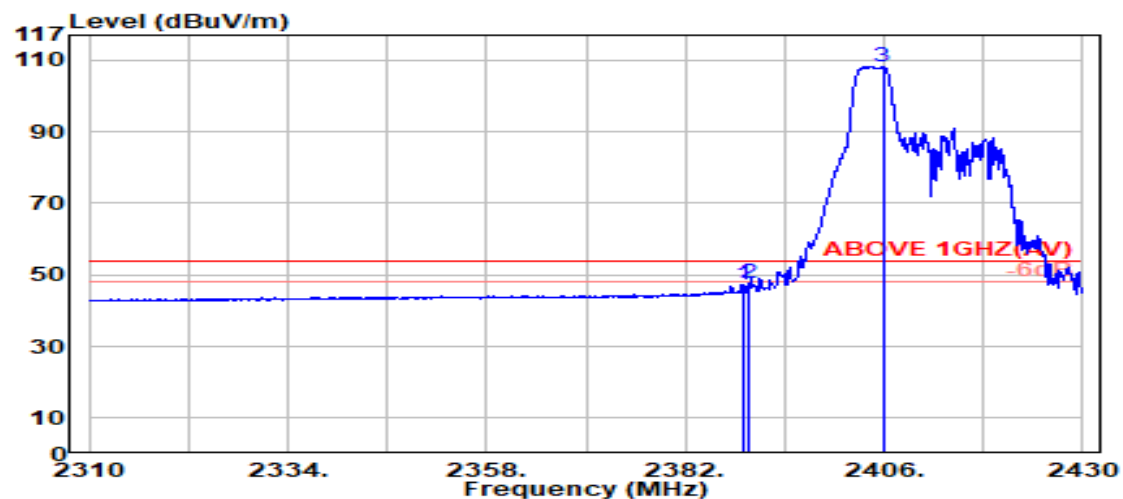

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.88	53.35	47.34	54.00	6.66	Average
2389.800	28.14	5.72	39.88	53.67	47.66	54.00	6.34	Average
@ 2405.850	28.12	5.74	39.88	114.22	108.21	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

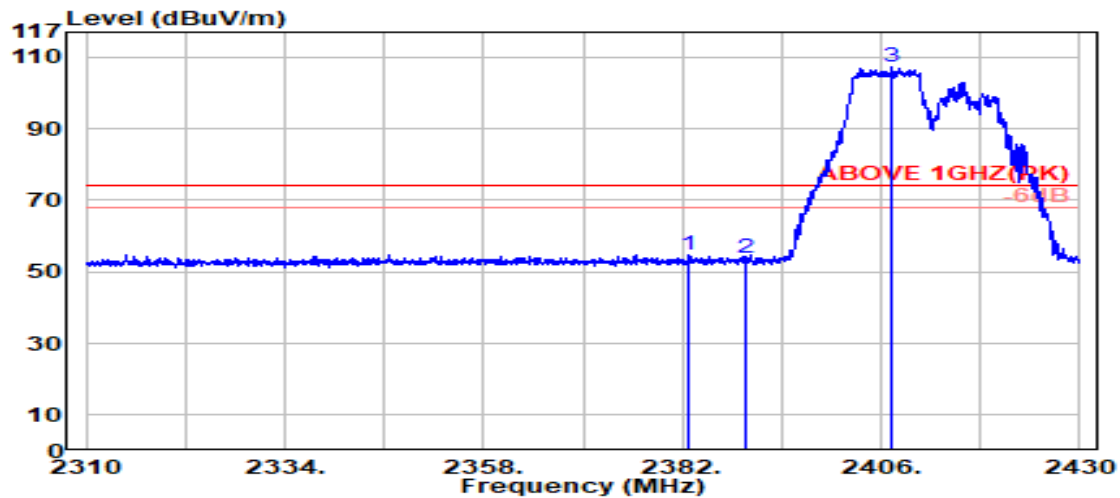

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.850	28.17	5.71	39.88	60.75	54.76	74.00	19.24	Peak
2389.800	28.14	5.72	39.88	59.72	53.70	74.00	20.30	Peak
@ 2407.250	28.13	5.74	39.88	113.23	107.23	---	---	Peak

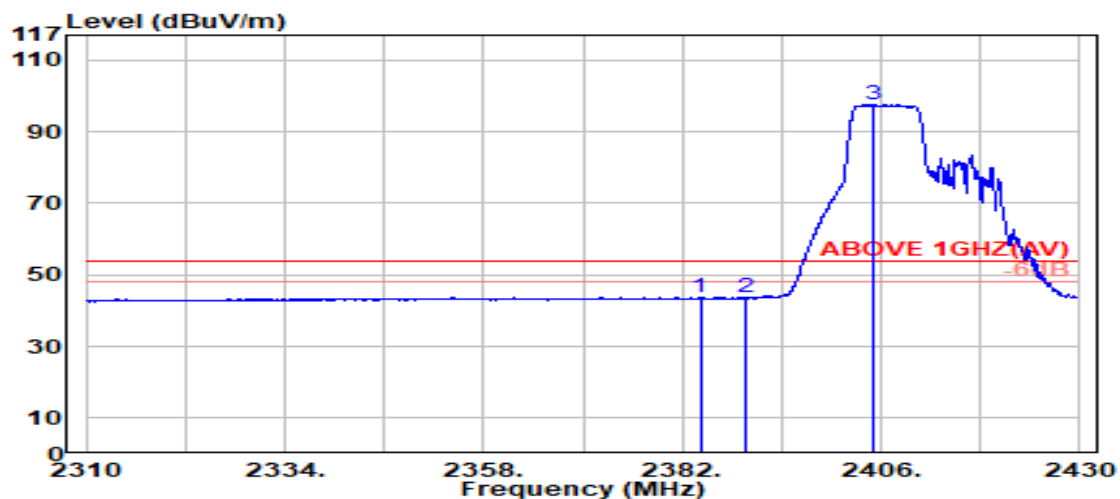

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.150	28.16	5.71	39.88	49.81	43.81	54.00	10.19	Average
2389.800	28.14	5.72	39.88	49.74	43.73	54.00	10.27	Average
@ 2405.200	28.12	5.74	39.88	103.64	97.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

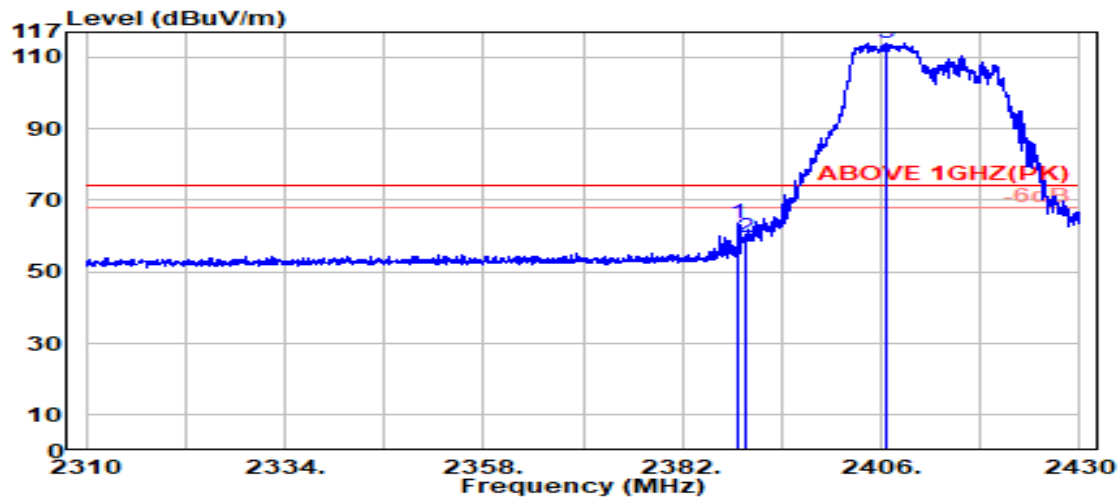

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	69.46	63.45	74.00	10.55	Peak
2389.800	28.14	5.72	39.88	65.79	59.77	74.00	14.23	Peak
@ 2406.500	28.13	5.74	39.88	119.82	113.81	---	---	Peak

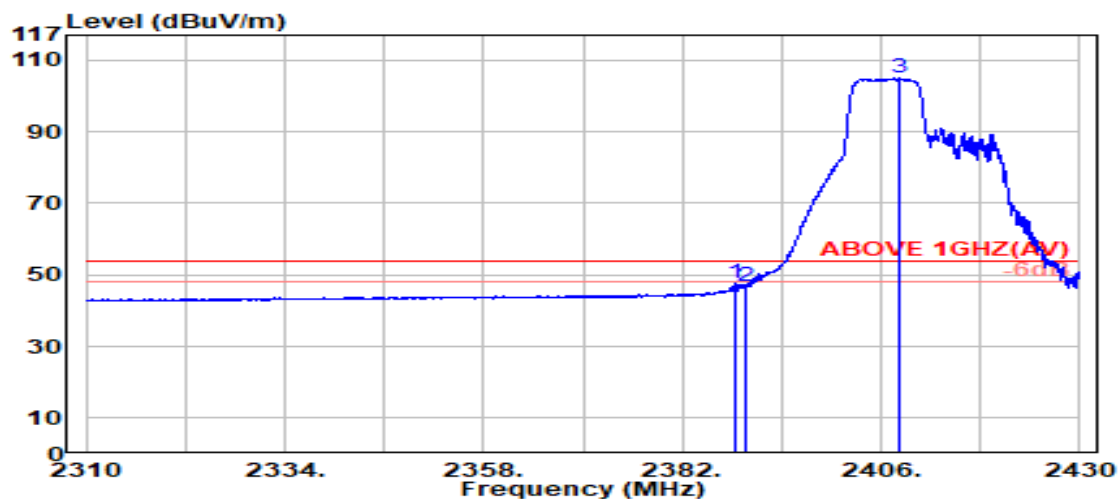

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.88	53.81	47.80	54.00	6.20	Average
2389.800	28.14	5.72	39.88	52.92	46.90	54.00	7.10	Average
@ 2408.350	28.13	5.74	39.88	110.95	104.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

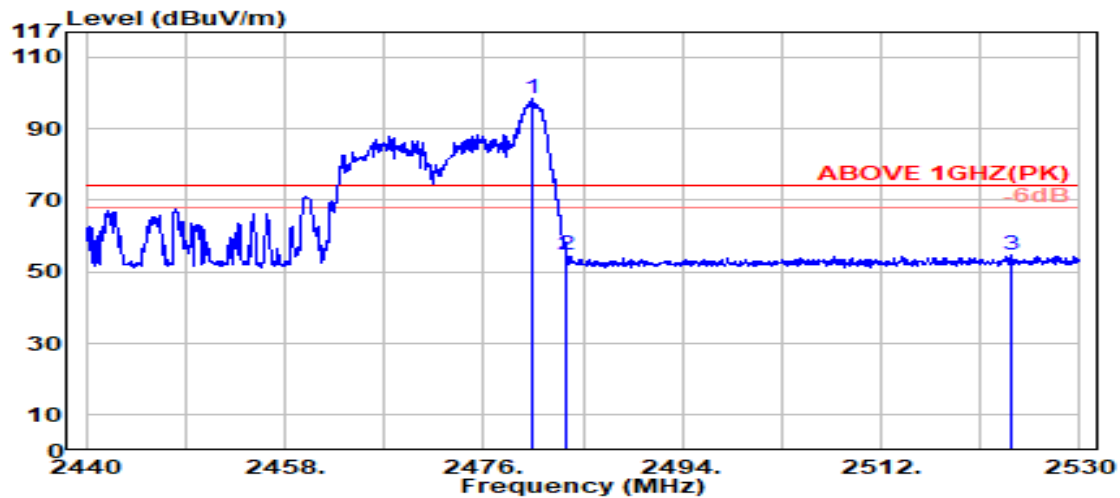

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.36	5.83	39.87	104.00	98.31	---	---	Peak
2483.500	28.37	5.83	39.87	60.37	54.70	74.00	19.30	Peak
2523.800	28.54	5.88	39.88	60.26	54.80	74.00	19.20	Peak

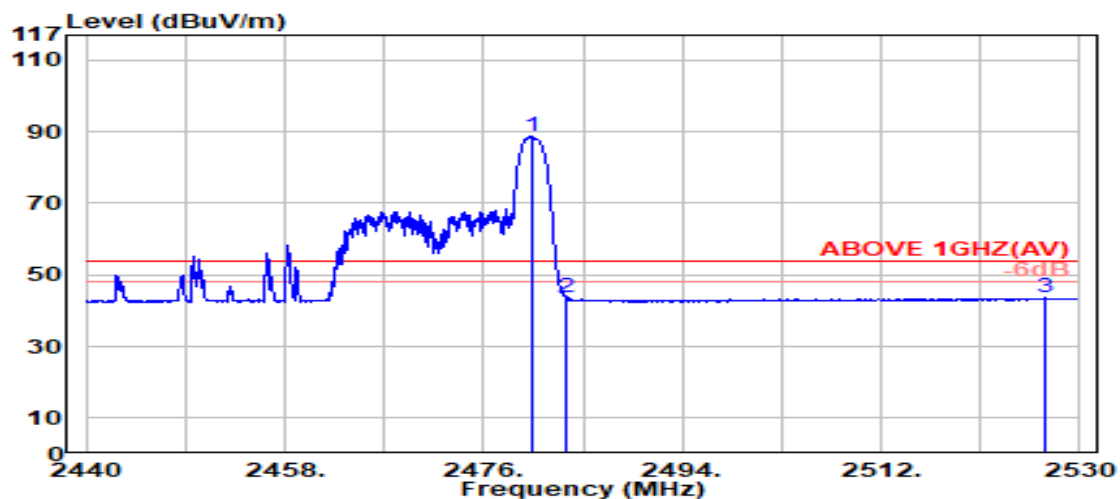

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	94.53	88.84	---	---	Average
2483.500	28.37	5.83	39.87	49.30	43.62	54.00	10.38	Average
2526.950	28.56	5.88	39.88	48.96	43.52	54.00	10.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

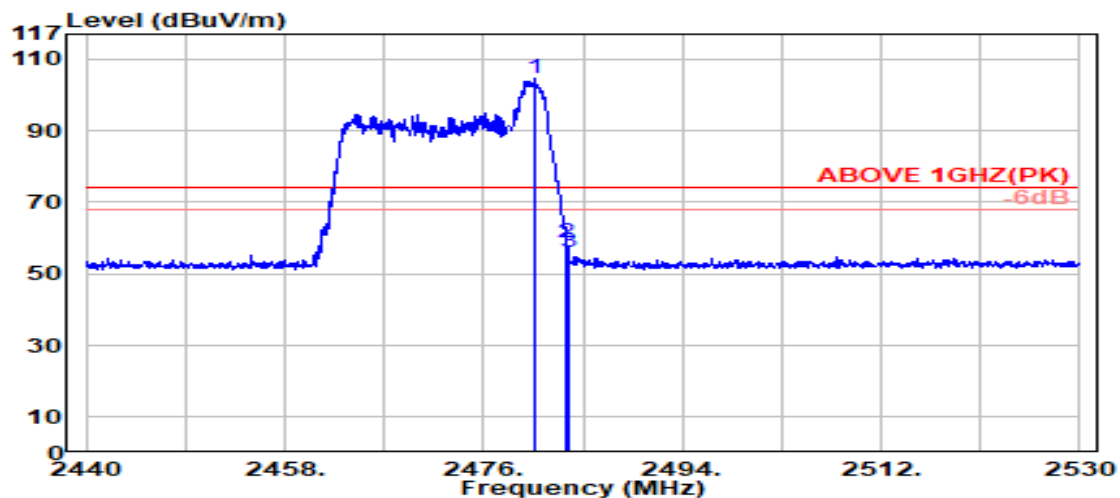

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.650	28.36	5.83	39.87	110.43	104.75	---	---	Peak
2483.500	28.37	5.83	39.87	64.21	58.54	74.00	15.46	Peak
2483.700	28.37	5.83	39.87	61.83	56.15	74.00	17.85	Peak

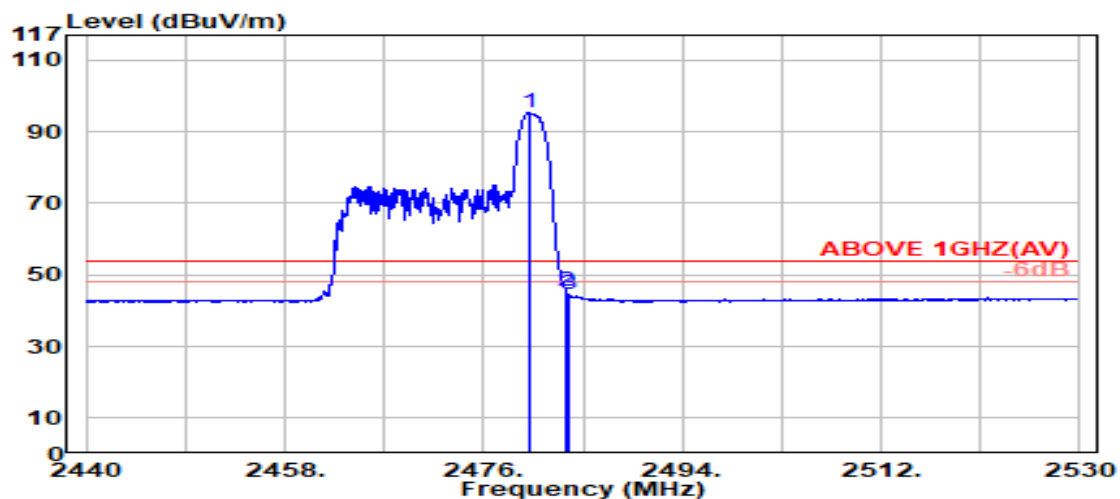

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.150	28.36	5.83	39.87	101.11	95.42	---	---	Average
2483.500	28.37	5.83	39.87	50.97	45.30	54.00	8.70	Average
2483.700	28.37	5.83	39.87	50.06	44.39	54.00	9.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

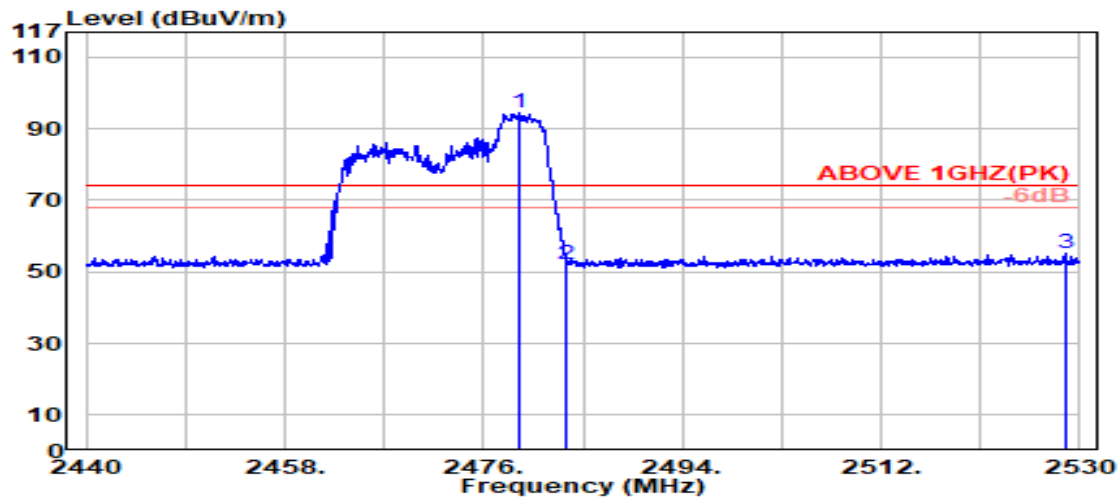

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.250	28.36	5.83	39.87	100.19	94.51	---	---	Peak
2483.500	28.37	5.83	39.87	57.77	52.09	74.00	21.91	Peak
2528.650	28.57	5.88	39.88	60.43	55.01	74.00	18.99	Peak

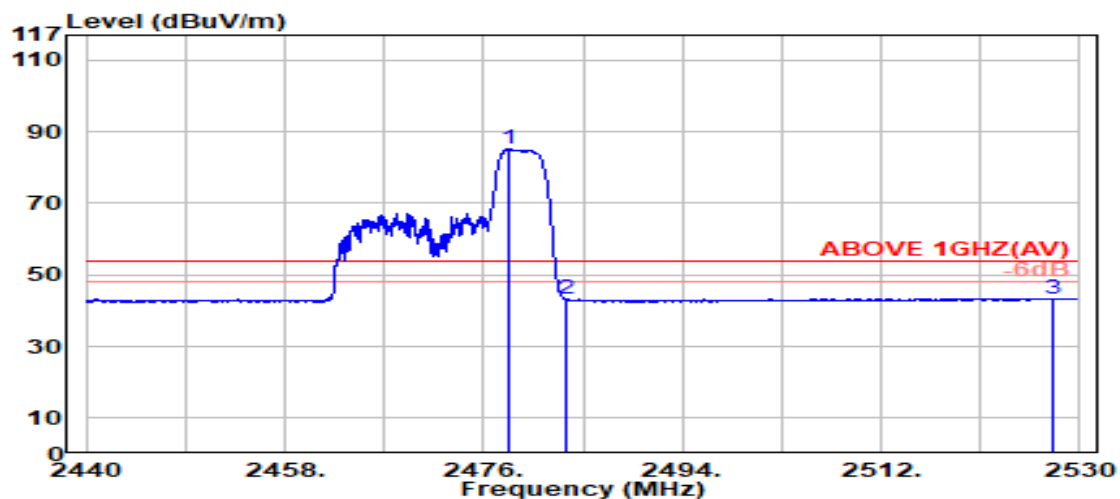

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.350	28.36	5.83	39.87	90.98	85.29	---	---	Average
2483.500	28.37	5.83	39.87	48.96	43.29	54.00	10.71	Average
2527.550	28.57	5.88	39.88	48.89	43.46	54.00	10.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

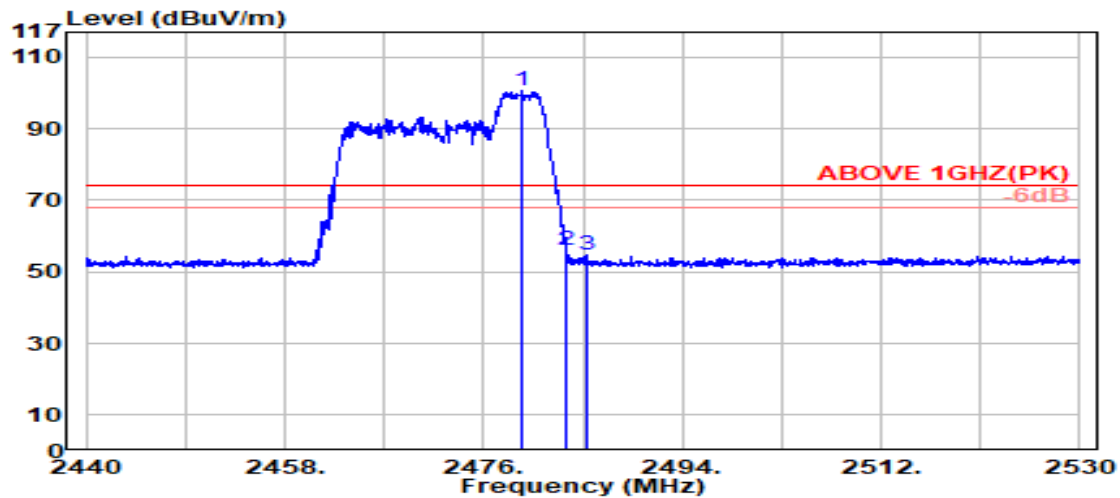

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.36	5.83	39.87	106.28	100.59	---	---	Peak
2483.500	28.37	5.83	39.87	61.70	56.02	74.00	17.98	Peak
2485.300	28.37	5.83	39.87	60.20	54.53	74.00	19.47	Peak

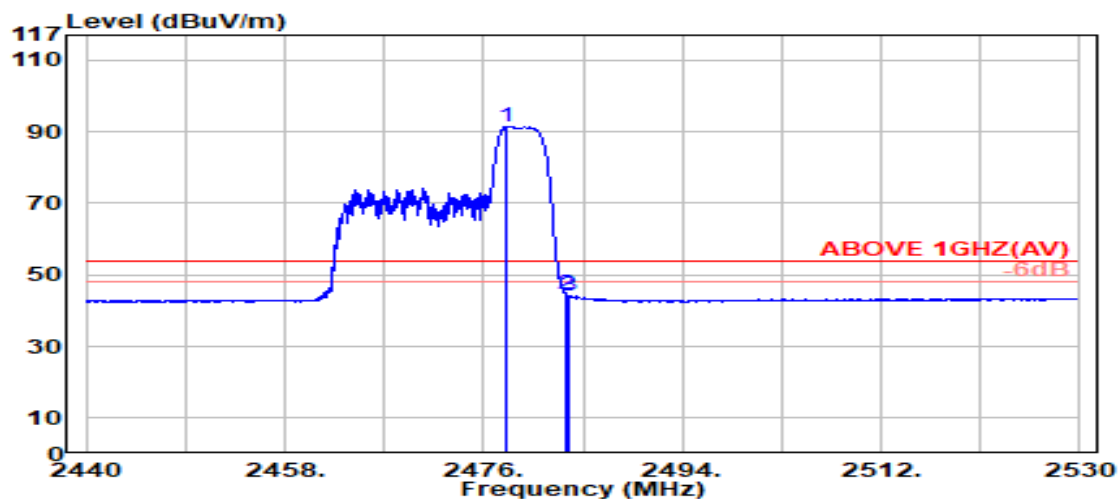

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.150	28.36	5.82	39.87	97.27	91.58	---	---	Average
2483.500	28.37	5.83	39.87	50.16	44.48	54.00	9.52	Average
2483.750	28.37	5.83	39.87	49.88	44.21	54.00	9.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

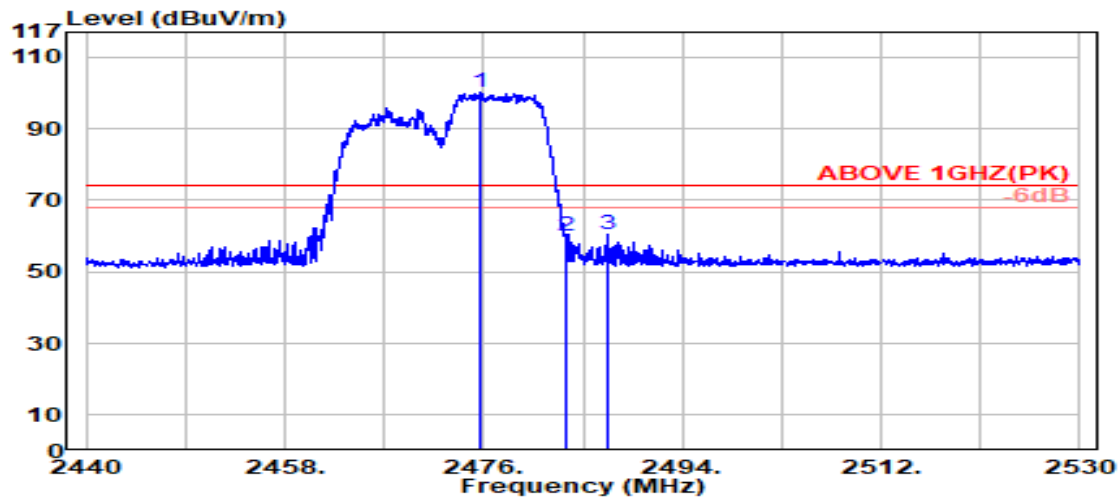

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.700	28.35	5.82	39.87	105.94	100.24	---	---	Peak
2483.500	28.37	5.83	39.87	65.88	60.21	74.00	13.79	Peak
2487.150	28.37	5.84	39.87	66.25	60.59	74.00	13.41	Peak

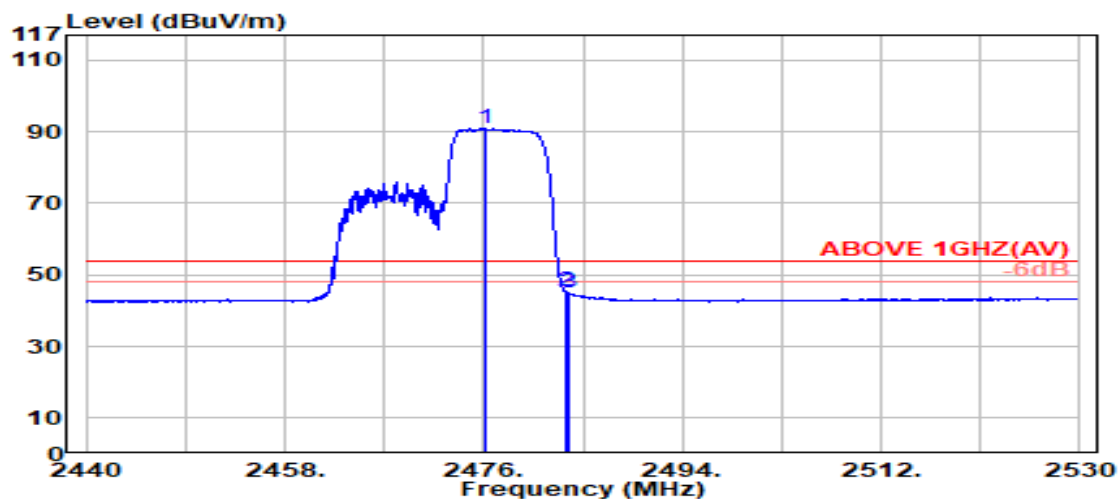

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.200	28.35	5.82	39.87	96.62	90.93	---	---	Average
2483.500	28.37	5.83	39.87	50.95	45.28	54.00	8.72	Average
2483.700	28.37	5.83	39.87	50.55	44.88	54.00	9.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

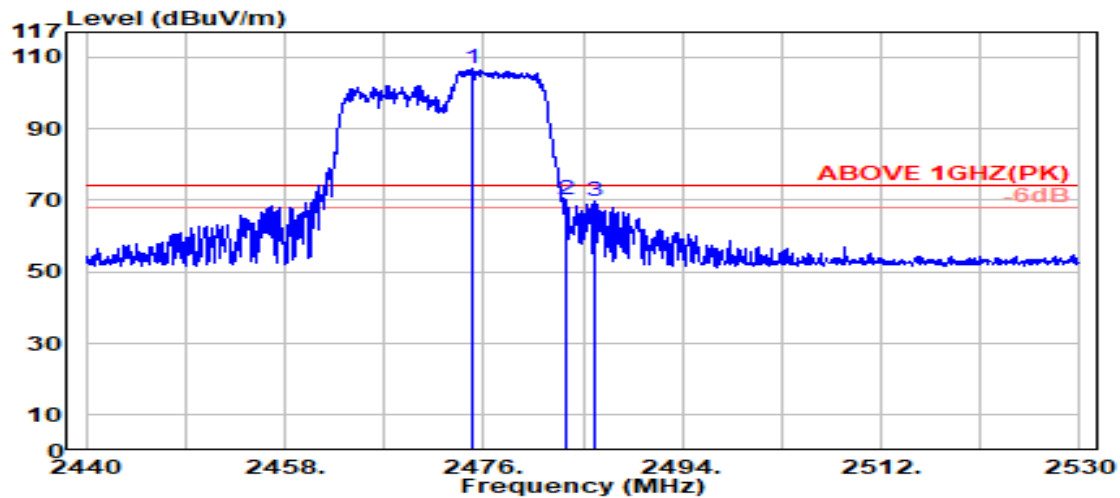

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.900	28.35	5.82	39.87	112.34	106.64	---	---	Peak
2483.500	28.37	5.83	39.87	75.95	70.28	74.00	3.72	Peak
2486.150	28.37	5.83	39.87	75.58	69.92	74.00	4.08	Peak

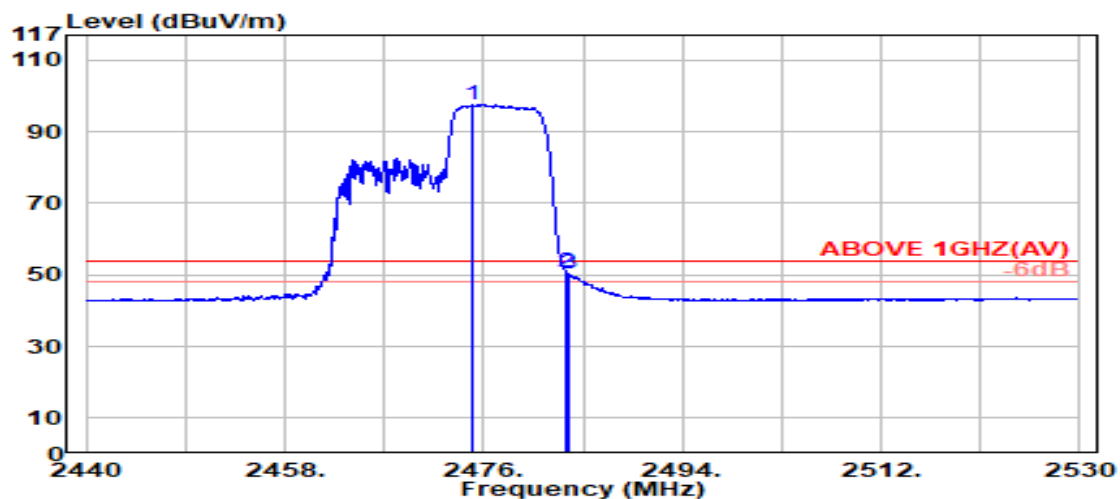

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.050	28.35	5.82	39.87	103.25	97.55	---	---	Average
2483.500	28.37	5.83	39.87	56.30	50.63	54.00	3.37	Average
2483.700	28.37	5.83	39.87	55.86	50.19	54.00	3.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

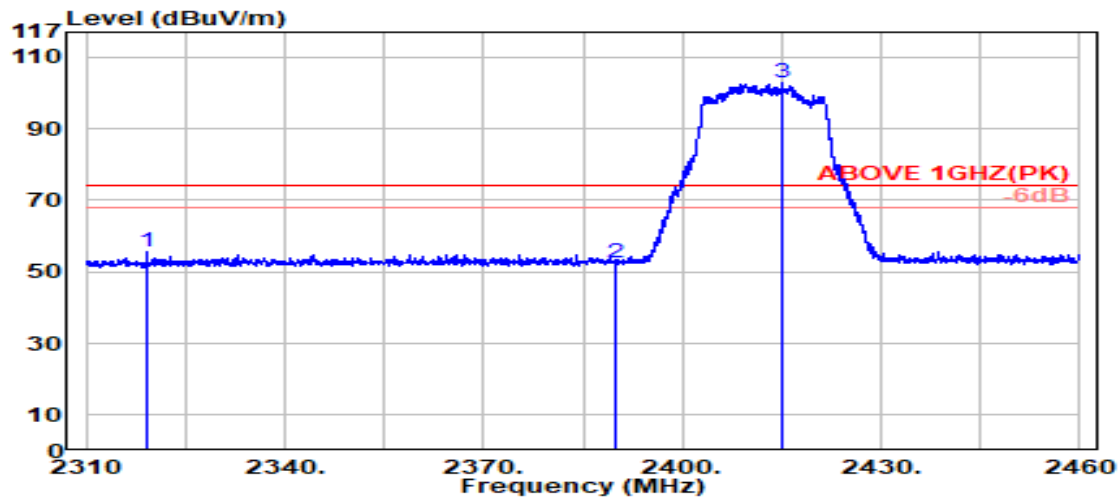

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2319.200	28.12	5.63	39.88	61.69	55.55	74.00	18.45	Peak
2389.800	28.14	5.72	39.88	58.66	52.65	74.00	21.35	Peak
@ 2415.100	28.16	5.75	39.88	108.65	102.68	---	---	Peak

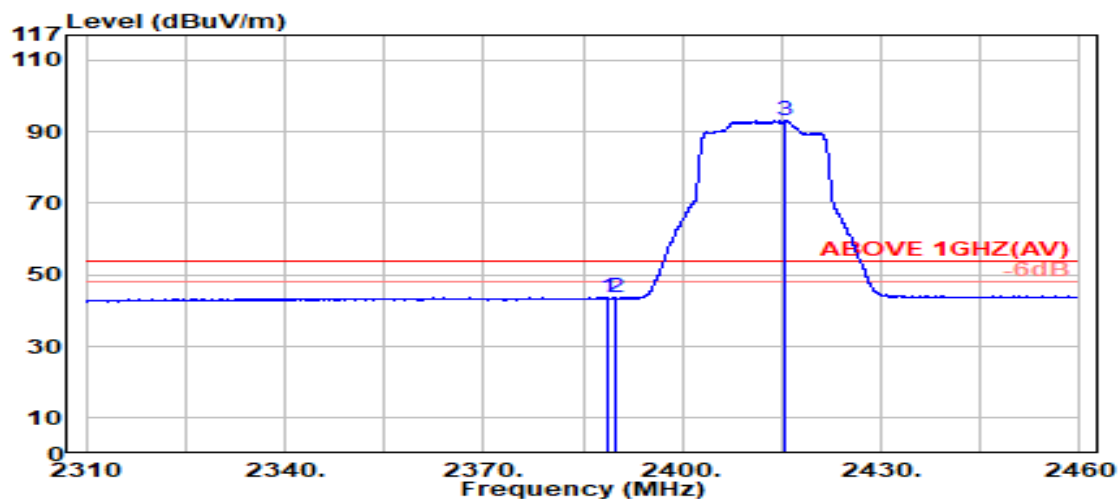

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.14	5.72	39.88	49.80	43.79	54.00	10.21	Average
2389.800	28.14	5.72	39.88	49.77	43.75	54.00	10.25	Average
@ 2415.550	28.16	5.75	39.88	98.97	93.01	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

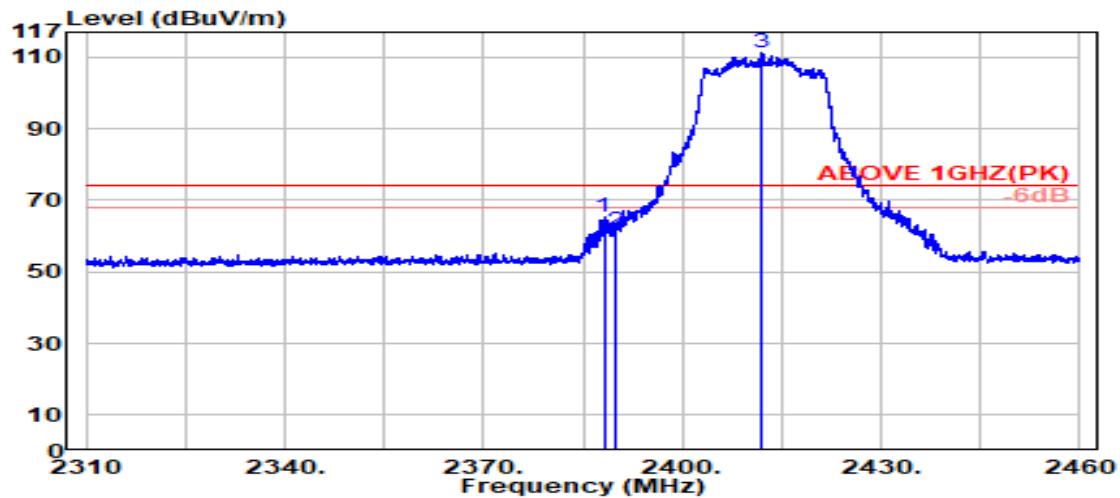

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.150	28.15	5.72	39.88	71.15	65.14	74.00	8.86	Peak
2389.800	28.14	5.72	39.88	67.37	61.35	74.00	12.65	Peak
@ 2412.100	28.15	5.75	39.88	117.14	111.16	---	---	Peak

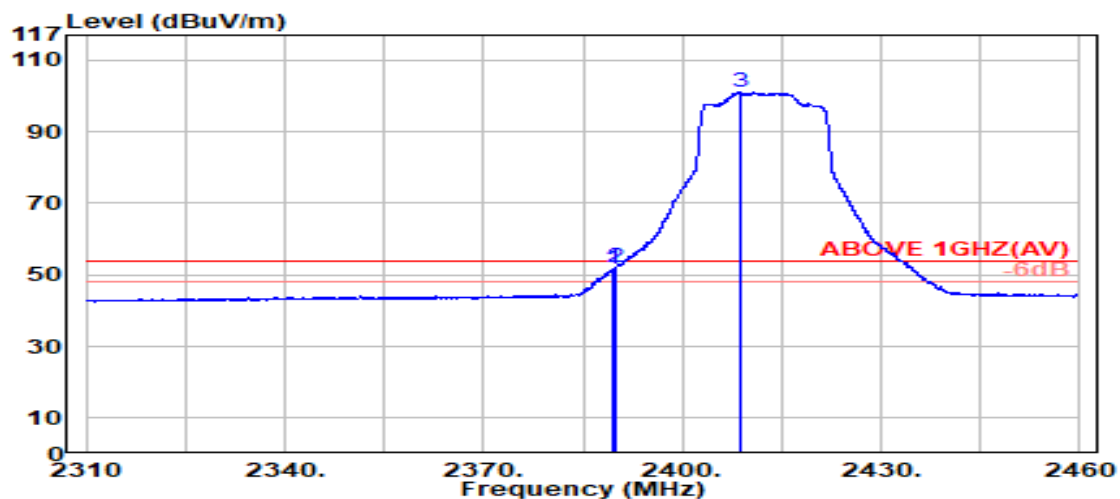

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	57.48	51.46	54.00	2.54	Average
2390.000	28.14	5.72	39.88	58.27	52.25	54.00	1.75	Average
@ 2408.600	28.13	5.74	39.88	107.03	101.03	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

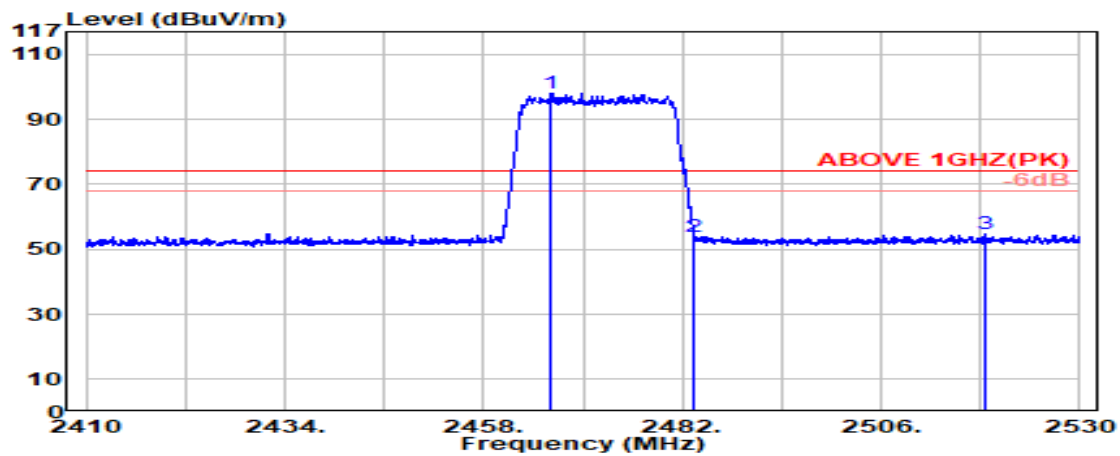

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.33	5.81	39.87	103.92	98.19	---	---	Peak
2483.500	28.37	5.83	39.87	59.68	54.00	74.00	20.00	Peak
2518.600	28.51	5.87	39.88	60.18	54.69	74.00	19.31	Peak

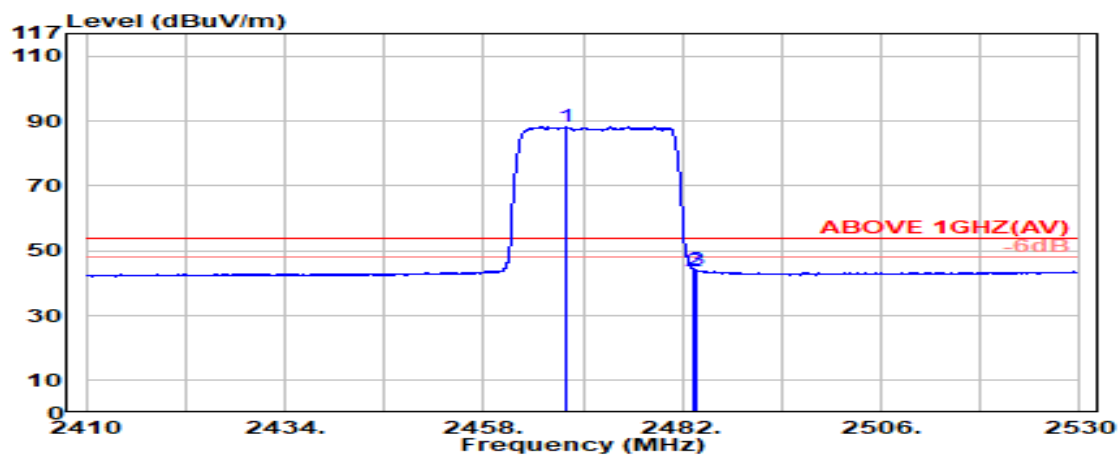

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.050	28.34	5.81	39.87	93.93	88.20	---	---	Average
2483.500	28.37	5.83	39.87	49.56	43.89	54.00	10.11	Average
2483.750	28.37	5.83	39.87	49.61	43.94	54.00	10.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

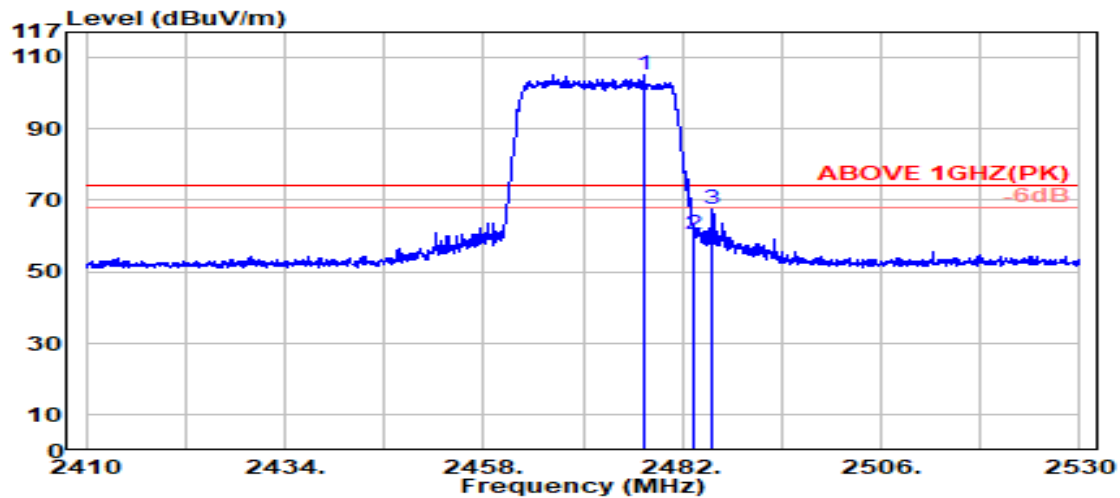

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2477.350	28.35	5.82	39.87	110.86	105.17	---	---	Peak
	2483.500	28.37	5.83	39.87	66.03	60.35	74.00	13.65	Peak
	2485.500	28.37	5.83	39.87	73.27	67.60	74.00	6.40	Peak

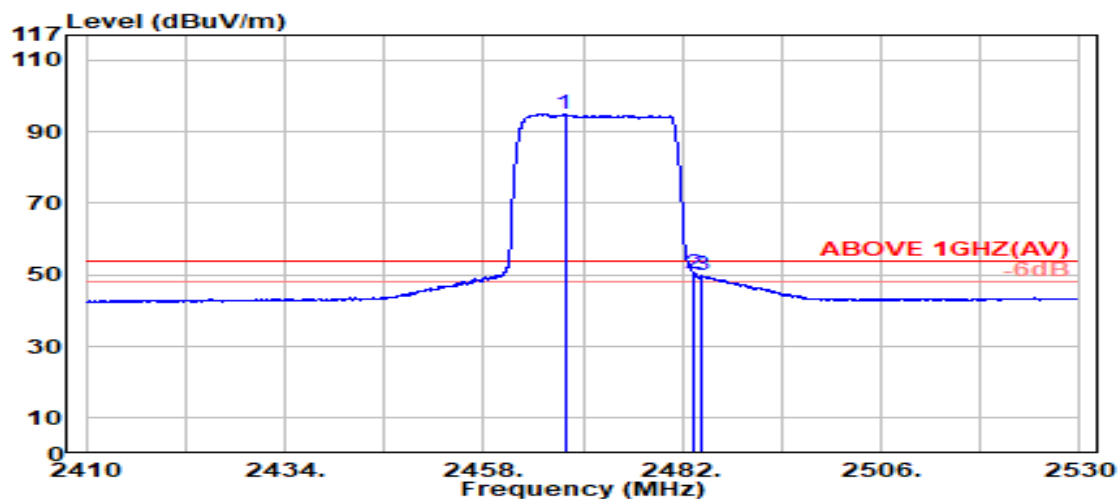

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.800	28.34	5.81	39.87	100.79	95.07	---	---	Average
	2483.500	28.37	5.83	39.87	56.00	50.33	54.00	3.67	Average
	2484.200	28.37	5.83	39.87	55.53	49.86	54.00	4.14	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

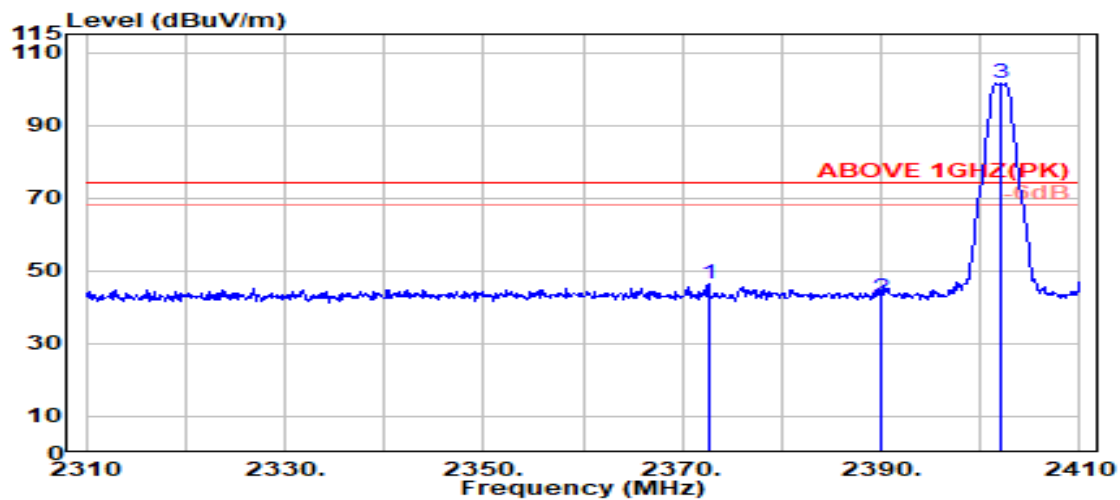

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.600	28.21	5.70	39.88	52.23	46.26	74.00	27.74	Peak
2390.000	28.14	5.72	39.88	48.38	42.36	74.00	31.64	Peak
@ 2402.000	28.11	5.74	39.88	107.52	101.49	---	---	Peak

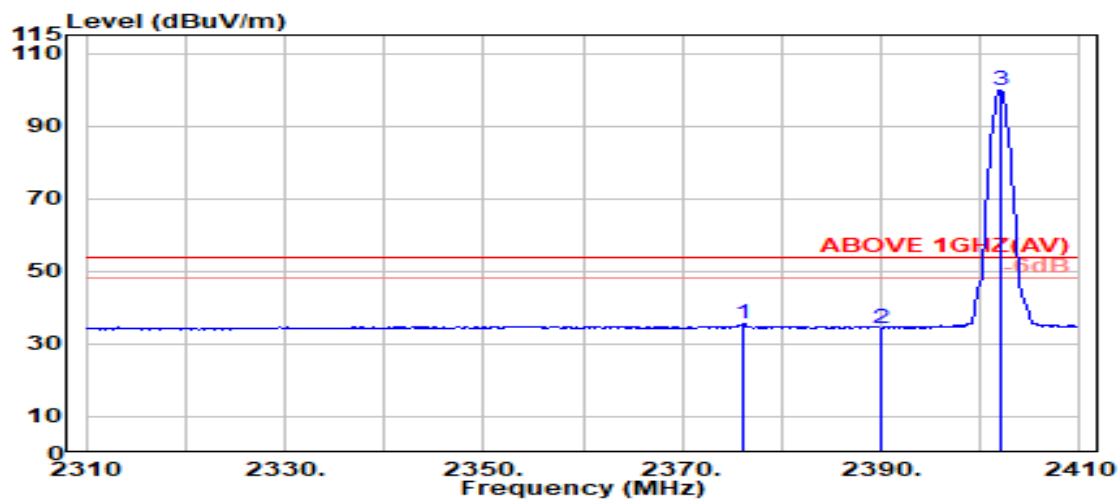

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.200	28.19	5.70	39.88	41.71	35.73	54.00	18.27	Average
2390.000	28.14	5.72	39.88	40.42	34.40	54.00	19.60	Average
@ 2402.000	28.11	5.74	39.88	106.01	99.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

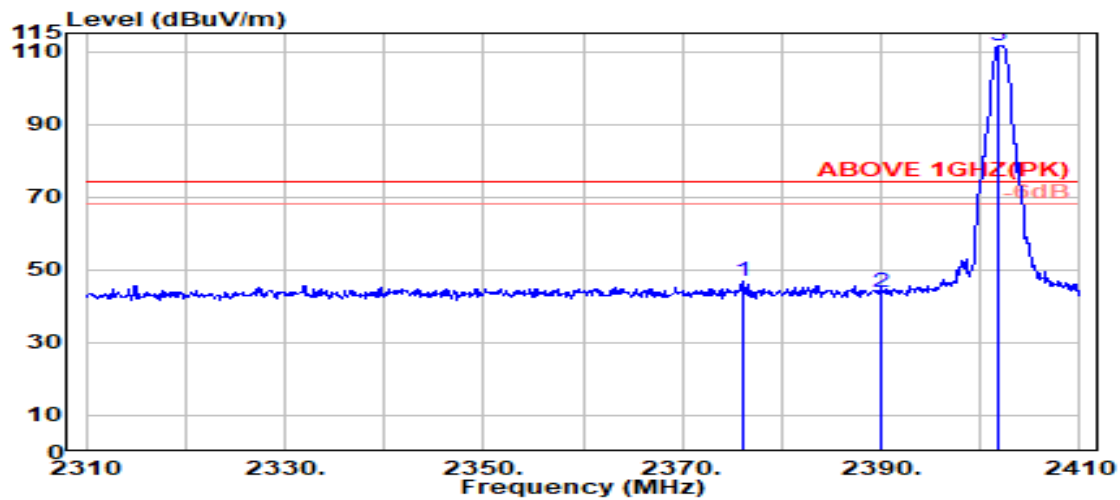

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.70	39.88	52.64	46.66	74.00	27.34	Peak
2390.000	28.14	5.72	39.88	49.67	43.65	74.00	30.35	Peak
@ 2401.800	28.11	5.74	39.88	117.39	111.35	---	---	Peak

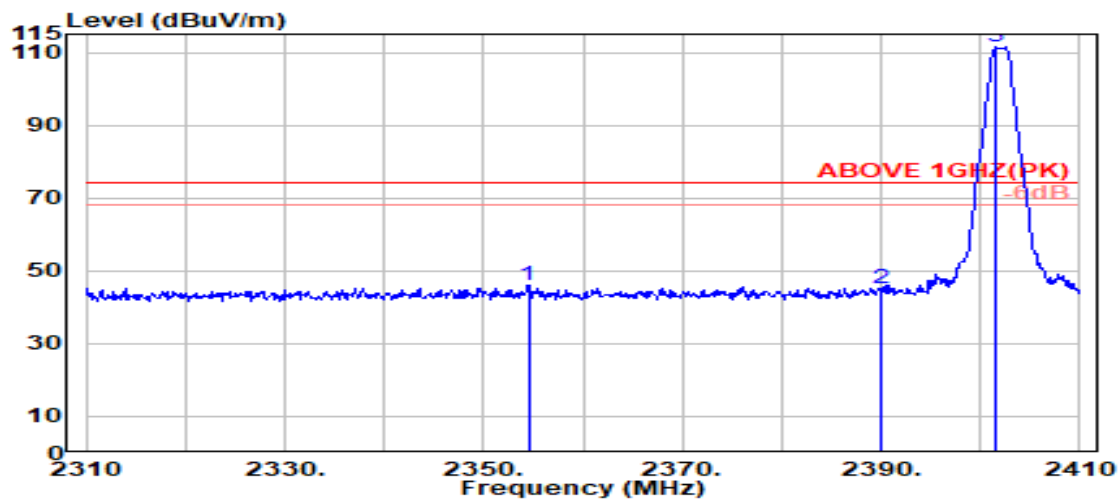

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.500	28.28	5.68	39.88	51.79	45.87	74.00	28.13	Peak
2390.000	28.14	5.72	39.88	50.96	44.95	74.00	29.05	Peak
@ 2401.500	28.11	5.73	39.88	117.45	111.41	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

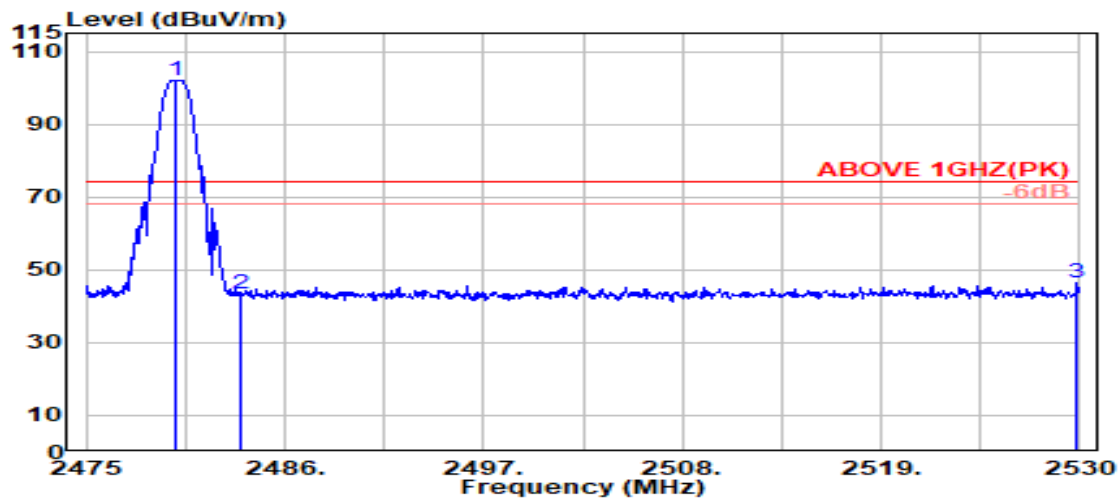

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	107.61	101.92	---	---	Peak
2483.500	28.37	5.83	39.87	49.25	43.57	74.00	30.43	Peak
2529.850	28.58	5.89	39.88	51.83	46.42	74.00	27.58	Peak

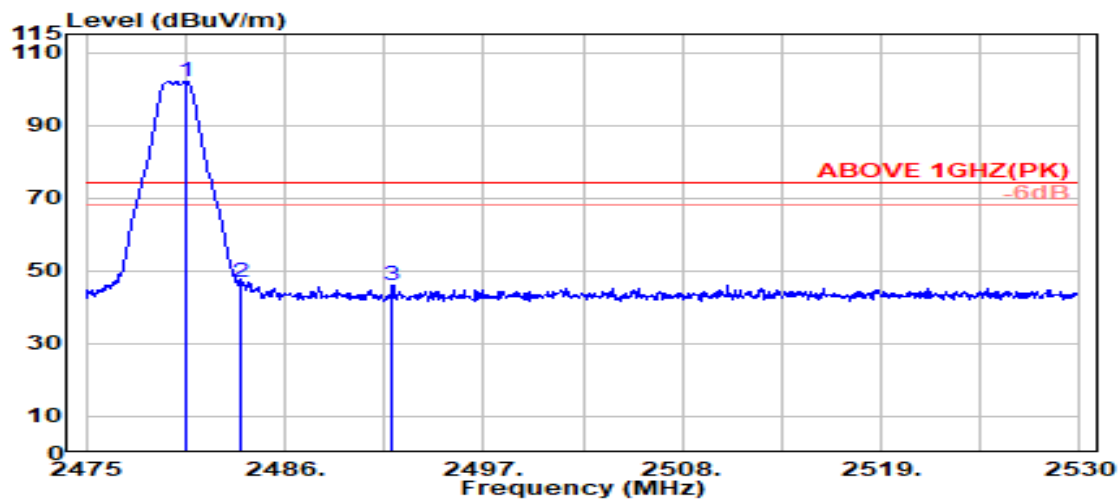

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.83	39.87	107.63	101.94	---	---	Peak
2483.500	28.37	5.83	39.87	52.51	46.84	74.00	27.16	Peak
2491.950	28.38	5.84	39.87	51.78	46.13	74.00	27.87	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

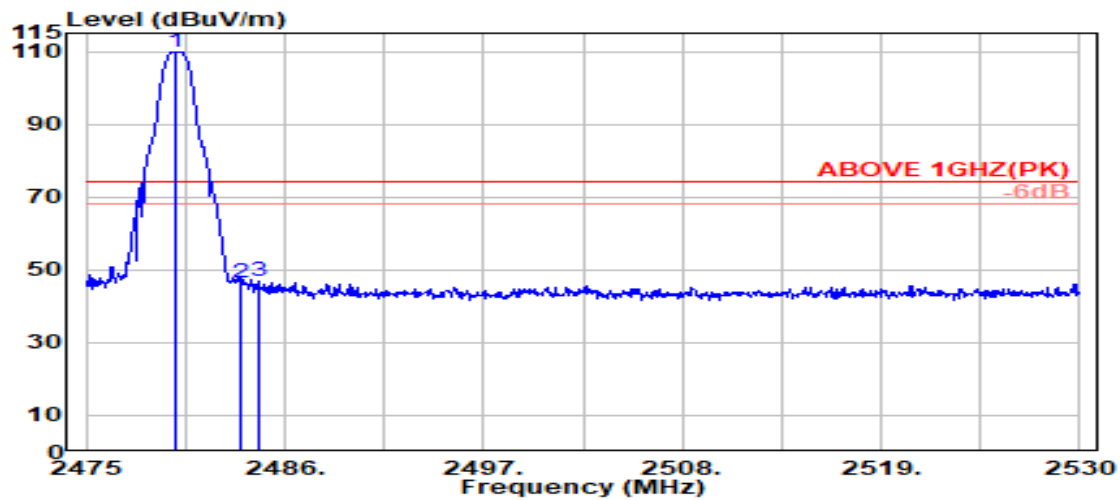

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	115.51	109.83	---	---	Peak
2483.500	28.37	5.83	39.87	51.94	46.26	74.00	27.74	Peak
2484.500	28.37	5.83	39.87	52.37	46.70	74.00	27.30	Peak

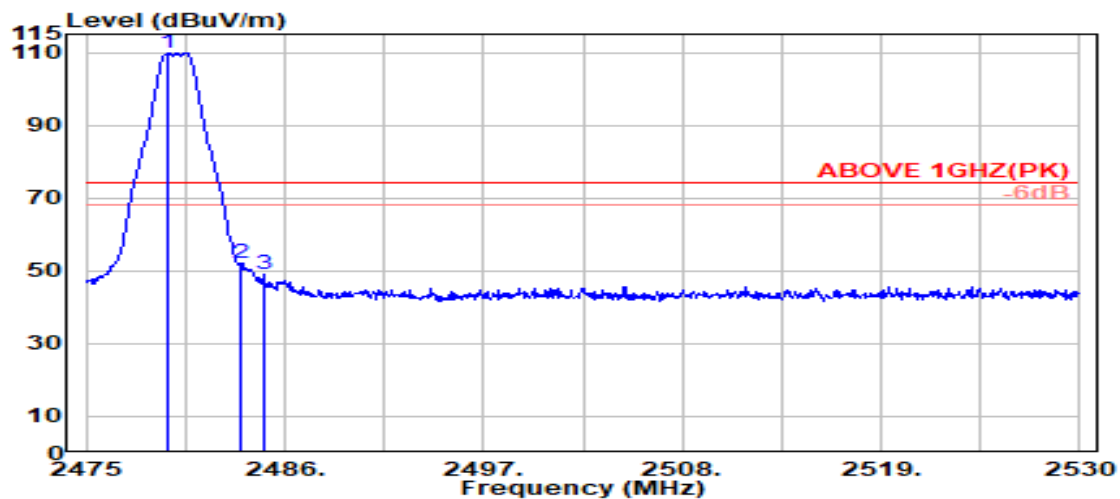

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.500	28.36	5.83	39.87	115.46	109.77	---	---	Peak
2483.500	28.37	5.83	39.87	57.72	52.04	74.00	21.96	Peak
2484.800	28.37	5.83	39.87	54.60	48.93	74.00	25.07	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

- **With INPAQ Antenna**
- **Wireless LAN Mode**

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.36	42.61	54.00	11.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.89	42.14	54.00	11.86	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.11	42.57	54.00	11.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	36.37	43.83	54.00	10.17	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.24	42.70	54.00	11.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.22	42.68	54.00	11.32	Peak

Mode	802.11n-HT40	Frequency	TX 2437 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.10	42.31	54.00	11.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.51	42.72	54.00	11.28	Peak

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.95	43.41	54.00	10.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	34.52	41.98	54.00	12.02	Peak

Mode	802.11ax-HE40	Frequency	TX 2437 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.27	42.48	54.00	11.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.32	42.53	54.00	11.47	Peak

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.64	42.89	54.00	11.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.58	42.83	54.00	11.17	Peak

Mode	802.11be-EHT40	Frequency	TX 2462 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.03	42.24	54.00	11.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	36.10	43.31	54.00	10.69	Peak

● **BLE Mode**

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	34.74	41.70	54.00	12.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	34.99	41.94	54.00	12.06	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.28	42.52	54.00	11.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.42	42.66	54.00	11.34	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	34.53	42.02	54.00	11.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	34.55	42.04	54.00	11.96	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

- **With LUXSHARE-ICT Antenna**
- **Wireless LAN Mode**

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	40.94	43.01	54.00	10.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	41.18	43.25	54.00	10.75	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.79	42.95	54.00	11.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	41.33	43.48	54.00	10.52	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.76	41.91	54.00	12.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.31	42.46	54.00	11.54	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2437 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	40.48	42.52	54.00	11.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	41.62	43.66	54.00	10.34	Peak

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.53	41.69	54.00	12.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.87	43.03	54.00	10.97	Peak

Mode	802.11ax-HE40	Frequency	TX 2437 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	40.55	42.59	54.00	11.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	39.78	41.82	54.00	12.18	Peak

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	41.07	43.14	54.00	10.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.64	41.71	54.00	12.29	Peak

Mode	802.11be-EHT40	Frequency	TX 2462 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	42.10	44.14	54.00	9.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	39.92	41.96	54.00	12.04	Peak

● **BLE Mode**

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	40.55	42.29	54.00	11.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	39.45	41.19	54.00	12.81	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	40.09	42.15	54.00	11.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	42.58	44.64	54.00	9.36	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	40.45	42.67	54.00	11.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	41.02	43.23	54.00	10.77	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.