

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	470
A.2.3 Emissions in Non-restricted Frequency Bands.....	517
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	518
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	518
A.3.2 Measurement Plots	551
A.4 POWER SPECTRAL DENSITY	600
A.4.1 Power Spectral Density Result	600
A.4.2 Measurement Plots	627
A.5 FREQUENCY STABILITY	654
A.5.1 Frequency stability Result	654
A.6 BAND EDGE	655

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2024/11/06	Temp./Hum.	24°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Antenna	INPAQ		

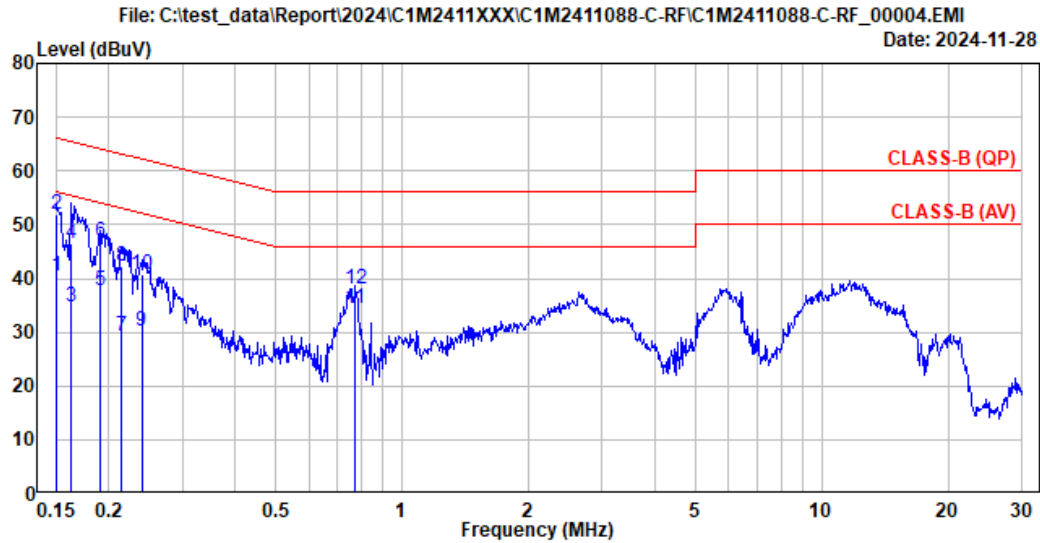

Site No.	: No.7 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ESH2-Z5 (366)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 21°C/52%	Test Rating	: 120ac/60Hz
EUT Model	: 16Z90TL	Engineer	: Byron Wu
Test Mode	: OPERATION		
	INPAQ		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.17	0.05	9.86	30.44	40.52	56.00	15.48	Average
2	0.150	0.17	0.05	9.86	41.87	51.95	66.00	14.05	QP
3	0.163	0.17	0.05	9.86	24.73	34.81	55.30	20.49	Average
4	0.163	0.17	0.05	9.86	36.56	46.64	65.30	18.66	QP
5	0.191	0.17	0.05	9.87	27.76	37.85	53.97	16.12	Average
6	0.191	0.17	0.05	9.87	36.66	46.75	63.97	17.22	QP
7	0.214	0.17	0.05	9.87	19.33	29.42	53.06	23.64	Average
8	0.214	0.17	0.05	9.87	32.15	42.24	63.06	20.82	QP
9	0.240	0.17	0.05	9.87	20.14	30.23	52.11	21.88	Average
10	0.240	0.17	0.05	9.87	30.60	40.69	62.11	21.42	QP
11	0.773	0.19	0.06	9.87	24.17	34.29	46.00	11.71	Average
12	0.773	0.19	0.06	9.87	27.94	38.06	56.00	17.94	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Antenna	INPAQ		

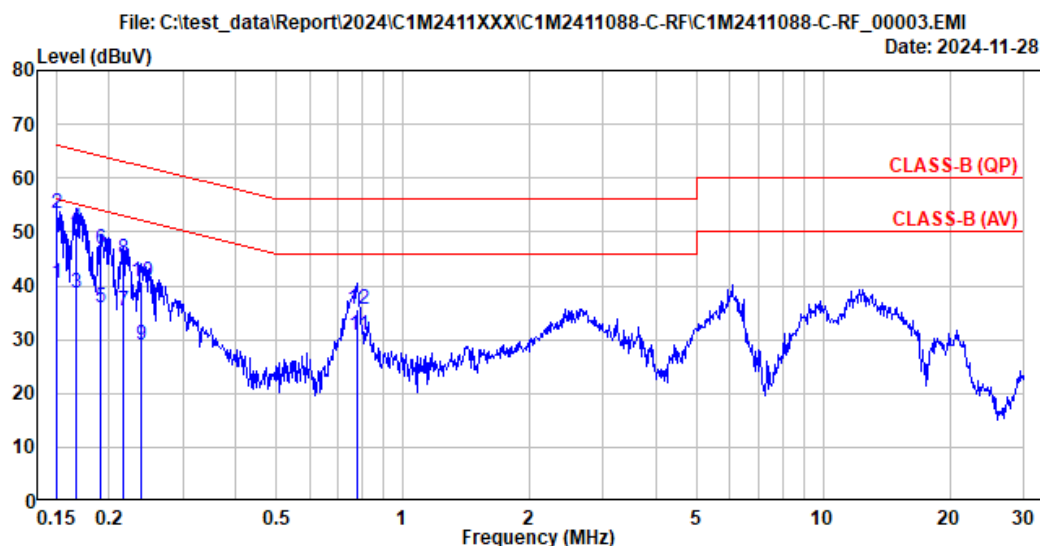

Site No.	: No.7 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ESH2-Z5 (366) (A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 21°C/52%	Test Rating	: 120ac/60Hz
EUT Model	: 16Z90TL	Engineer	: Byron Wu
Test Mode	: OPERATION		
	INPAQ		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.14	0.05	9.86	30.48	40.53	56.00	15.47	Average
2	0.150	0.14	0.05	9.86	43.43	53.48	66.00	12.52	QP
3	0.167	0.14	0.05	9.86	28.63	38.68	55.09	16.41	Average
4	0.167	0.14	0.05	9.86	40.81	50.86	65.09	14.23	QP
5	0.191	0.14	0.05	9.87	25.76	35.82	54.01	18.19	Average
6	0.191	0.14	0.05	9.87	36.82	46.88	64.01	17.13	QP
7	0.217	0.14	0.05	9.87	25.37	35.43	52.94	17.51	Average
8	0.217	0.14	0.05	9.87	35.05	45.11	62.94	17.83	QP
9	0.238	0.14	0.05	9.87	18.94	29.00	52.15	23.15	Average
10	0.238	0.14	0.05	9.87	30.55	40.61	62.15	21.54	QP
11	0.781	0.18	0.06	9.87	20.74	30.85	46.00	15.15	Average
12	0.781	0.18	0.06	9.87	25.60	35.71	56.00	20.29	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Antenna	LUXSHARE-ICT		

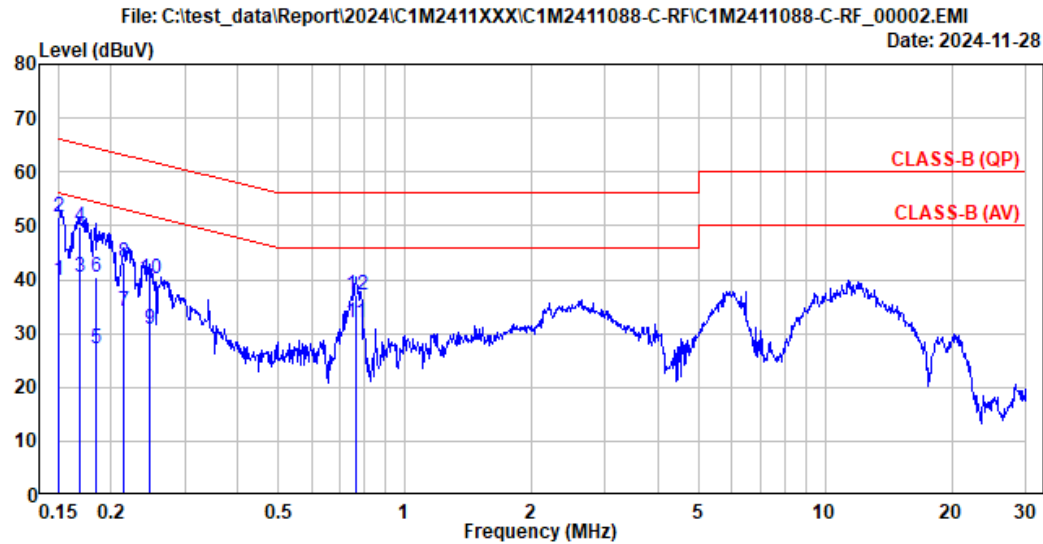

Site No.	: No.7 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ESH2-Z5 (366)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 21°C/52%	Test Rating	: 120ac/60Hz
EUT Model	: 16Z90TL	Engineer	: Byron Wu
Test Mode	: OPERATION		
	LUXSHARE		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	0.17	0.05	9.86	29.69	39.77	55.96	16.19	Average
2	0.151	0.17	0.05	9.86	41.45	51.53	65.96	14.43	QP
3	0.168	0.17	0.05	9.86	30.33	40.41	55.05	14.64	Average
4	0.168	0.17	0.05	9.86	39.82	49.90	65.05	15.15	QP
5	0.184	0.17	0.05	9.87	16.97	27.06	54.30	27.24	Average
6	0.184	0.17	0.05	9.87	30.25	40.34	64.30	23.96	QP
7	0.215	0.17	0.05	9.87	24.03	34.12	53.02	18.90	Average
8	0.215	0.17	0.05	9.87	33.15	43.24	63.02	19.78	QP
9	0.248	0.17	0.05	9.86	20.62	30.70	51.82	21.12	Average
10	0.248	0.17	0.05	9.86	30.08	40.16	61.82	21.66	QP
11	0.765	0.19	0.06	9.87	21.74	31.86	46.00	14.14	Average
12	0.765	0.19	0.06	9.87	27.15	37.27	56.00	18.73	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Antenna	LUXSHARE-ICT		

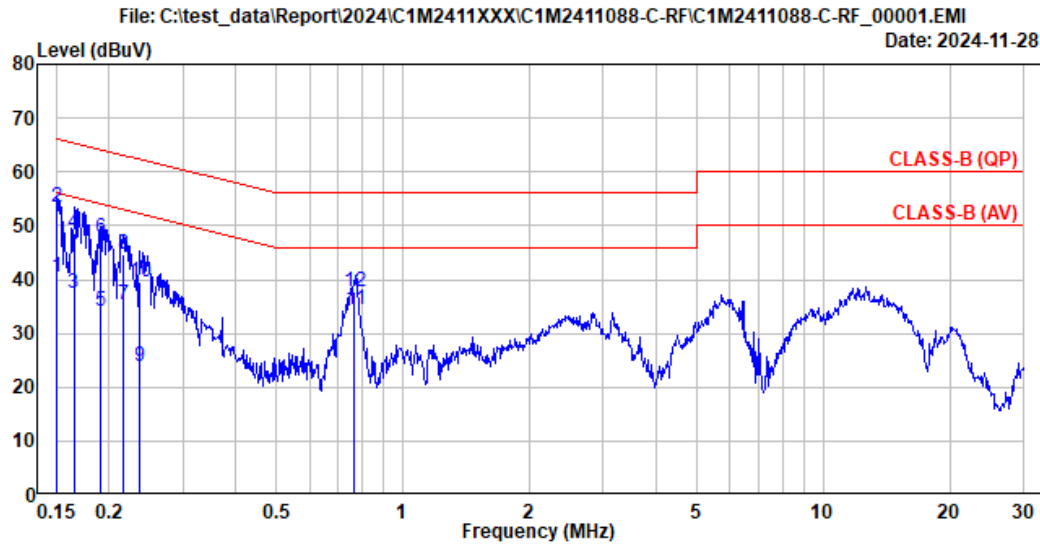

Site No. : No.7 Shielded Room
Instrument 1 : Receiver ESR(114)
Instrument 2 : ESH2-Z5 (366)(A)|CE-07|ESH3-Z2 (495)
Limit : CLASS-B (QP)
Environment : 21°C/52%
EUT Model : 16Z90TL
Test Mode : OPERATION
LUXSHARE

Data No. : 1
Phase : Line
Test Rating : 120ac/60Hz
Engineer : Byron Wu

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.150	0.14	0.05	9.86	30.42	40.47	56.00	15.53	Average
2	0.150	0.14	0.05	9.86	43.36	53.41	66.00	12.59	QP
3	0.165	0.14	0.05	9.86	27.39	37.44	55.21	17.77	Average
4	0.165	0.14	0.05	9.86	38.54	48.59	65.21	16.62	QP
5	0.191	0.14	0.05	9.87	24.18	34.24	53.97	19.73	Average
6	0.191	0.14	0.05	9.87	37.51	47.57	63.97	16.40	QP
7	0.216	0.14	0.05	9.87	25.16	35.22	52.98	17.76	Average
8	0.216	0.14	0.05	9.87	34.63	44.69	62.98	18.29	QP
9	0.237	0.14	0.05	9.87	13.69	23.75	52.19	28.44	Average
10	0.237	0.14	0.05	9.87	29.60	39.66	62.19	22.53	QP
11	0.769	0.18	0.06	9.87	24.36	34.47	46.00	11.53	Average
12	0.769	0.18	0.06	9.87	27.56	37.67	56.00	18.33	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/11/25 ~ 12/13	Temp./Hum.	22 ~ 24°C/50 ~ 58%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu/Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Antenna: INPAQ

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5835MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	22.30	1.30	26.51	37.76	34.85	40.00	5.15	Peak
158.000	16.42	2.96	25.98	35.35	28.75	43.50	14.75	Peak
378.000	21.16	5.28	26.34	32.71	32.81	46.00	13.19	Peak
669.000	24.64	7.14	27.40	27.97	32.35	46.00	13.65	Peak
867.000	25.79	8.48	27.12	27.66	34.81	46.00	11.19	Peak
968.500	26.77	9.10	26.85	27.78	36.81	54.00	17.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.98	1.31	26.51	36.79	33.57	40.00	6.43	Peak
185.500	15.48	3.24	25.86	34.64	27.49	43.50	16.01	Peak
378.000	21.16	5.28	26.34	31.38	31.49	46.00	14.51	Peak
557.000	24.02	6.61	27.31	28.85	32.18	46.00	13.82	Peak
868.500	25.79	8.49	27.11	27.69	34.86	46.00	11.14	Peak
995.500	27.07	9.25	26.77	27.07	36.61	54.00	17.39	Peak

Antenna: LUXSHARE-ICT

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5835MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.55	1.45	26.50	38.57	35.07	40.00	4.93	Peak
123.000	17.79	2.78	26.17	33.60	28.00	43.50	15.50	Peak
157.500	15.75	3.14	26.00	37.25	30.14	43.50	13.36	Peak
378.000	20.60	5.54	26.36	31.16	30.95	46.00	15.05	Peak
492.500	22.71	6.58	27.17	27.33	29.45	46.00	16.55	Peak
573.500	23.76	6.77	27.42	27.87	30.98	46.00	15.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.44	26.50	37.66	34.46	40.00	5.54	Peak
125.000	17.70	2.81	26.16	33.68	28.02	43.50	15.48	Peak
160.000	15.60	3.16	25.99	38.16	30.93	43.50	12.57	Peak
378.000	20.60	5.54	26.36	31.88	31.66	46.00	14.34	Peak
432.000	21.69	6.08	26.77	28.41	29.42	46.00	16.58	Peak
511.500	22.97	6.66	27.25	28.32	30.70	46.00	15.30	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Antenna: INPAQ

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

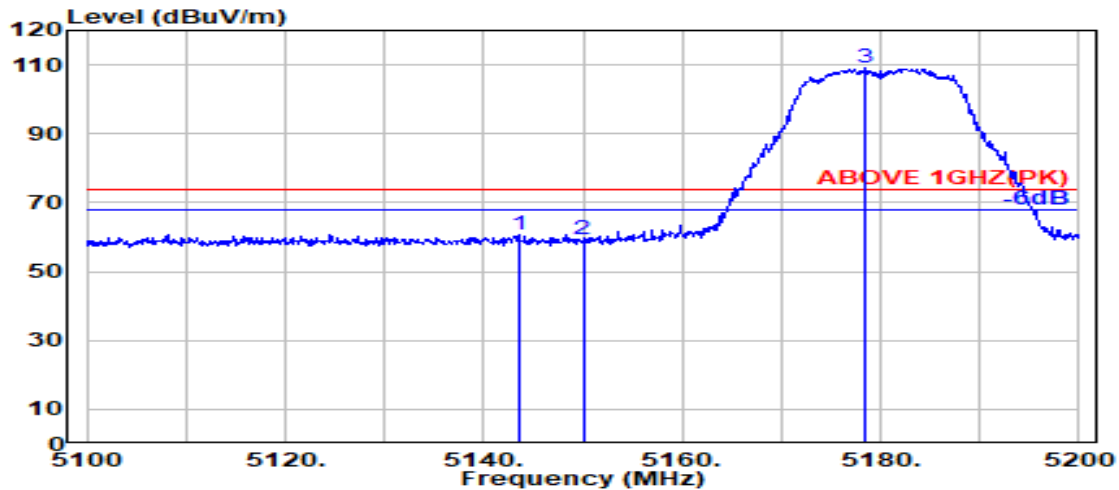

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.500	33.70	8.54	34.28	52.75	60.70	74.00	13.30	Peak
5150.000	33.70	8.54	34.28	51.55	59.51	74.00	14.49	Peak
@ 5178.500	33.70	8.56	34.27	101.02	109.01	---	---	Peak

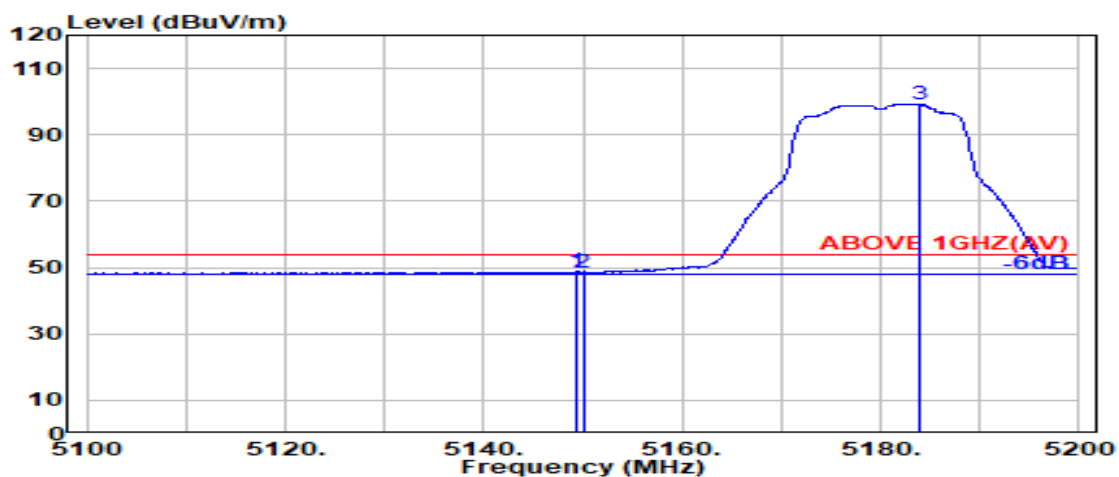

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.28	40.91	48.87	54.00	5.13	Average
5150.000	33.70	8.54	34.28	40.65	48.61	54.00	5.39	Average
@ 5183.900	33.70	8.56	34.27	91.33	99.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

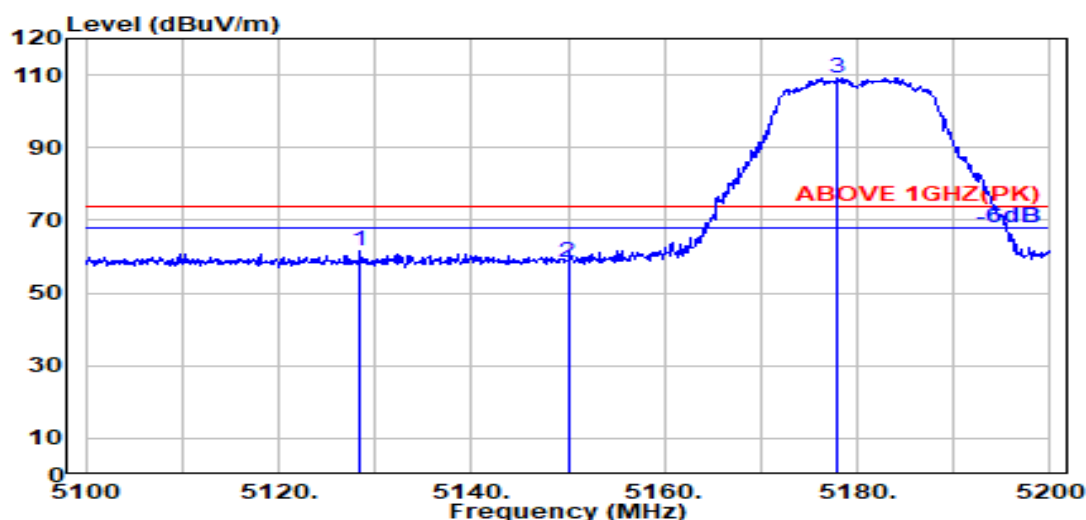

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.400	33.70	8.53	34.29	53.54	61.48	74.00	12.52	Peak
5150.000	33.70	8.54	34.28	50.58	58.54	74.00	15.46	Peak
@ 5178.000	33.70	8.56	34.27	101.18	109.17	---	---	Peak

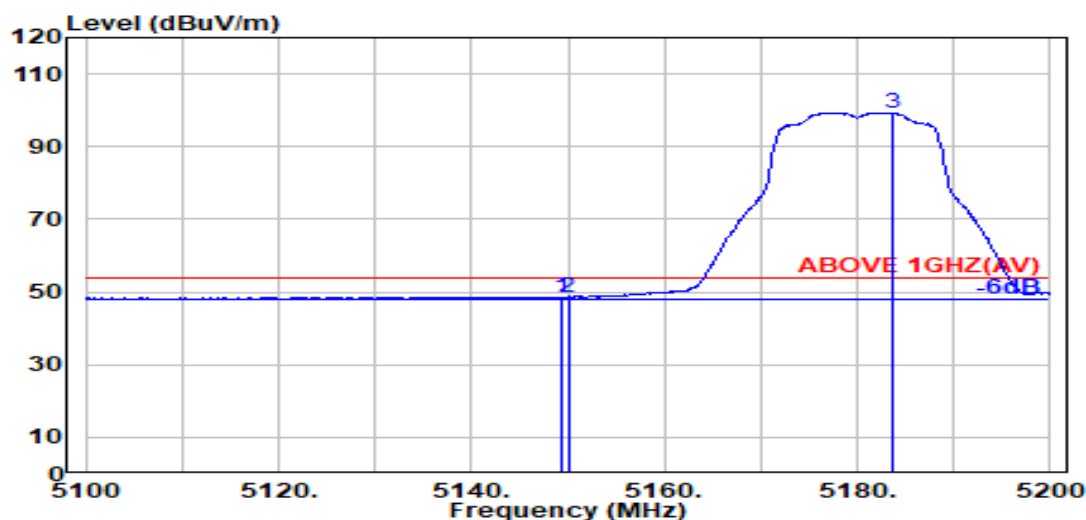


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.28	40.70	48.67	54.00	5.33	Average
5150.000	33.70	8.54	34.28	40.63	48.59	54.00	5.41	Average
@ 5183.600	33.70	8.56	34.27	91.38	99.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

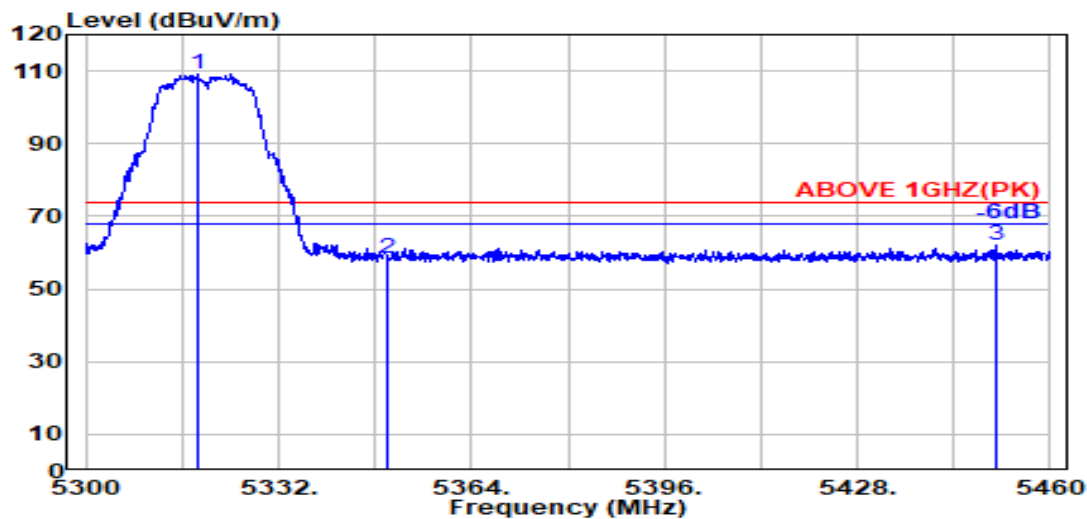

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.700	34.02	8.65	34.23	100.48	108.93	---	---	Peak
5350.000	33.90	8.67	34.22	50.22	58.57	74.00	15.43	Peak
5451.000	34.20	8.72	34.19	53.11	61.85	74.00	12.15	Peak

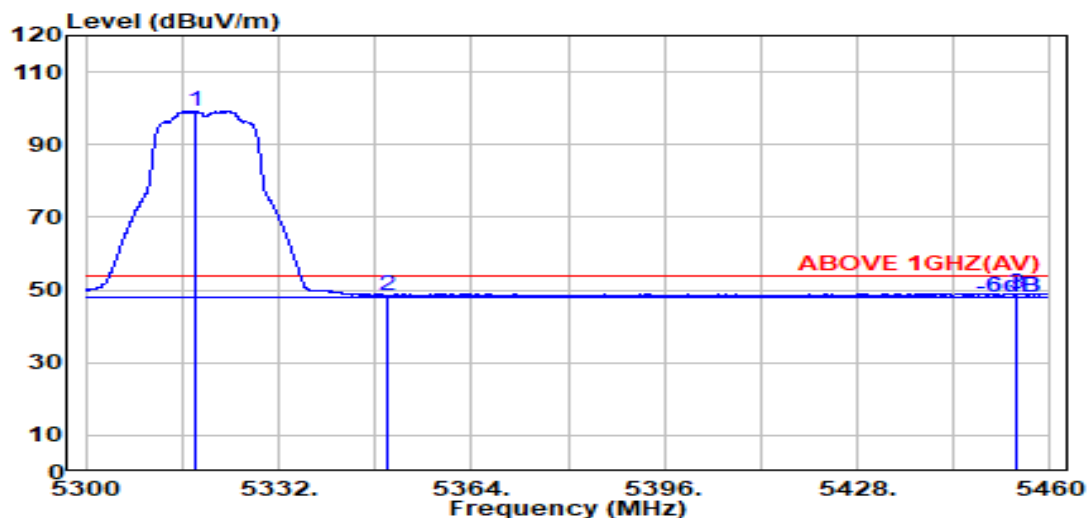

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.100	34.03	8.65	34.23	90.73	99.18	---	---	Average
5350.000	33.90	8.67	34.22	40.22	48.56	54.00	5.44	Average
5454.500	34.19	8.73	34.18	40.29	49.02	54.00	4.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

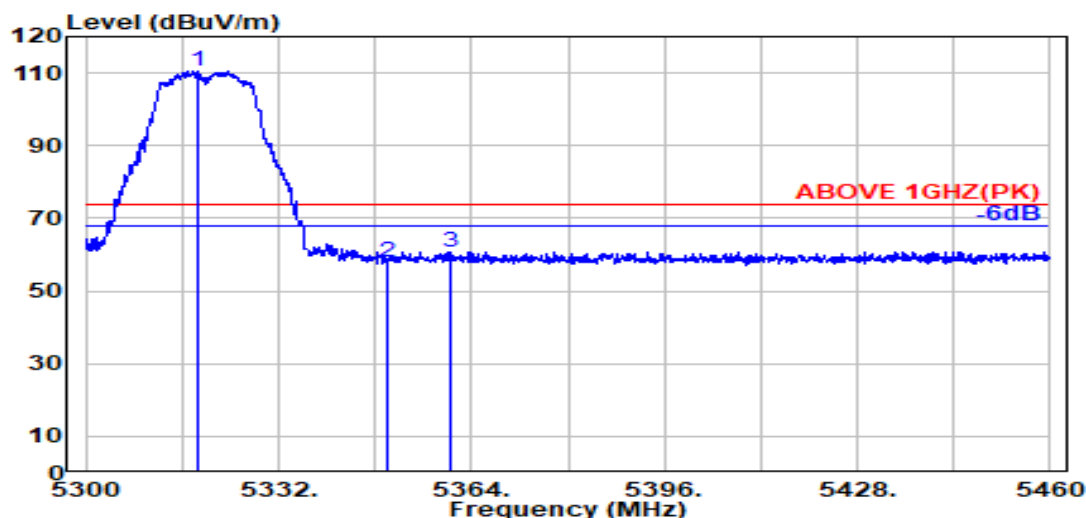

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.500	34.03	8.65	34.23	102.00	110.45	---	---	Peak
5350.000	33.90	8.67	34.22	49.81	58.16	74.00	15.84	Peak
5360.600	33.94	8.67	34.21	52.50	60.90	74.00	13.10	Peak

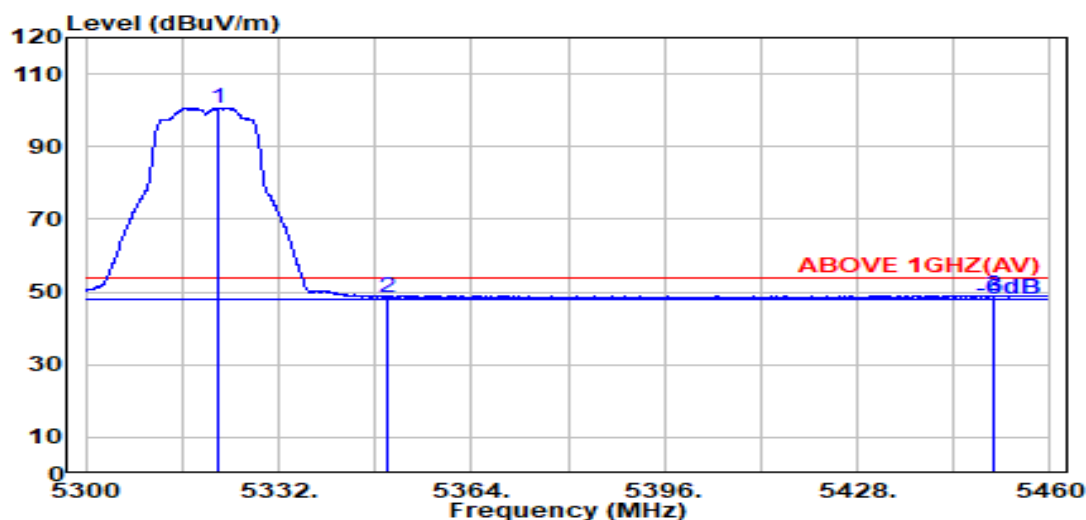

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.000	34.01	8.65	34.23	92.13	100.57	---	---	Average
5350.000	33.90	8.67	34.22	40.28	48.63	54.00	5.37	Average
5450.600	34.20	8.72	34.19	40.34	49.07	54.00	4.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

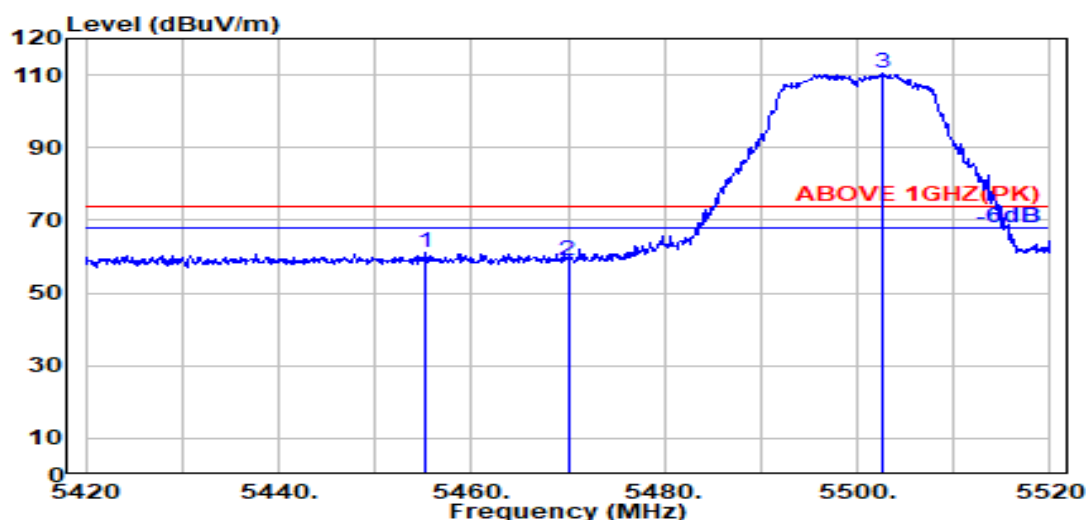

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.100	34.19	8.73	34.18	52.20	60.93	74.00	13.07	Peak
5470.000	34.16	8.74	34.18	50.04	58.76	74.00	15.24	Peak
@ 5502.700	34.10	8.75	34.17	101.75	110.43	---	---	Peak

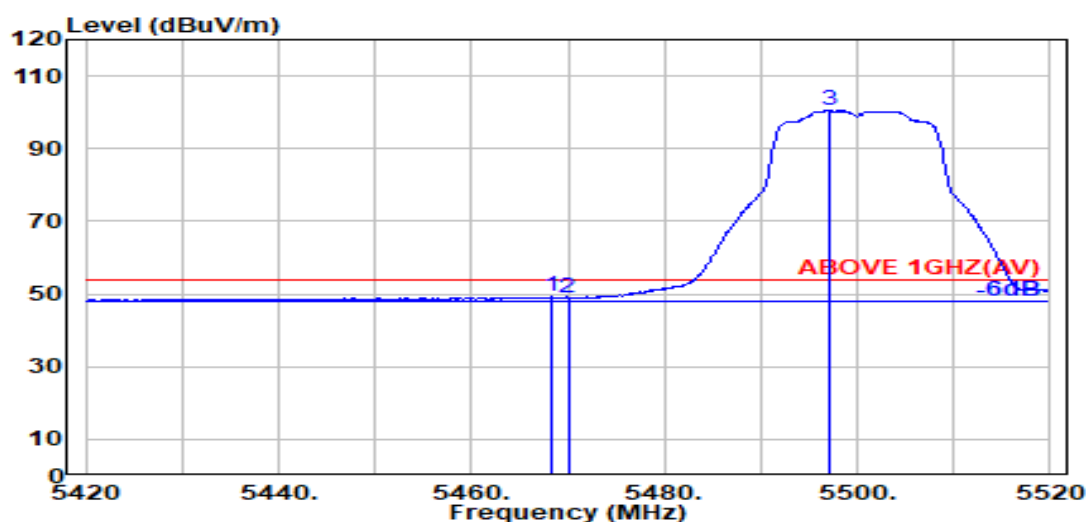

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	40.44	49.16	54.00	4.84	Average
5470.000	34.16	8.74	34.18	40.14	48.86	54.00	5.14	Average
@ 5497.000	34.11	8.75	34.17	91.72	100.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

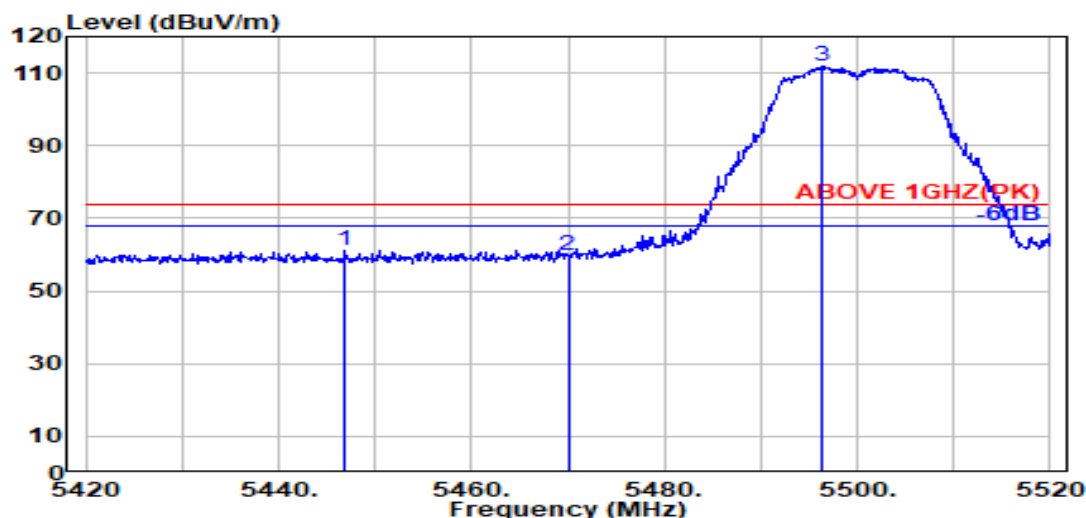

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.900	34.19	8.72	34.19	52.60	61.33	74.00	12.67	Peak
5470.000	34.16	8.74	34.18	50.84	59.55	74.00	14.45	Peak
@ 5496.400	34.11	8.75	34.17	103.07	111.76	---	---	Peak

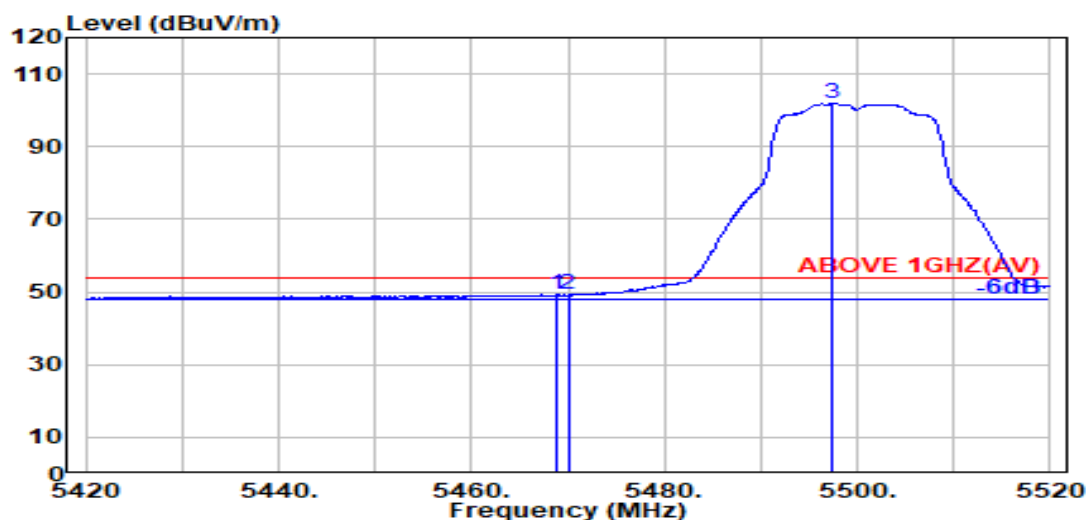

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	40.57	49.29	54.00	4.71	Average
5470.000	34.16	8.74	34.18	40.46	49.18	54.00	4.82	Average
@ 5497.500	34.10	8.75	34.17	93.08	101.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

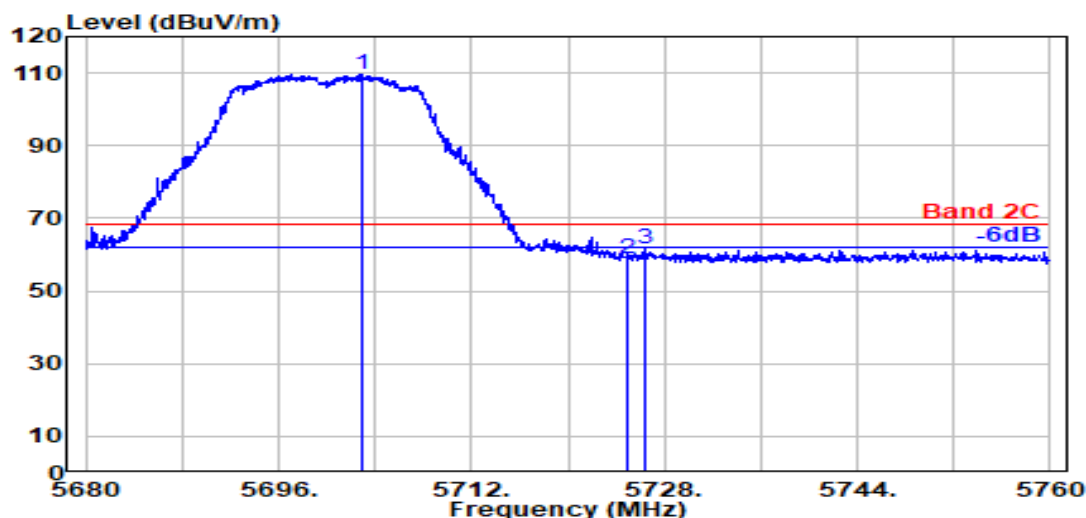

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.850	33.80	8.87	34.27	101.27	109.67	---	---	Peak
5725.000	33.80	8.88	34.28	50.24	58.65	68.20	9.55	Peak
5726.300	33.80	8.88	34.28	53.20	61.60	68.20	6.60	Peak

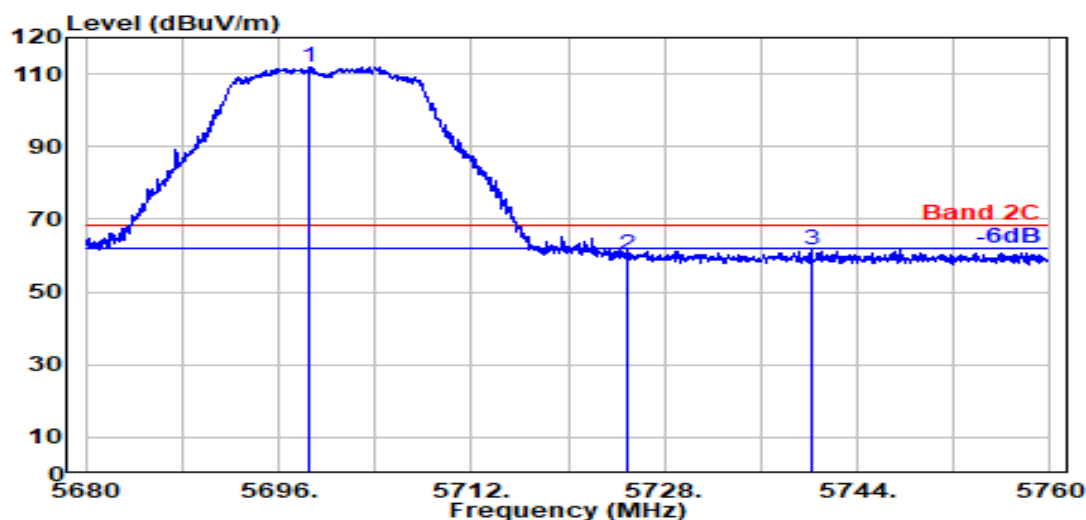

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.550	33.81	8.87	34.26	103.64	112.04	---	---	Peak
5725.000	33.80	8.88	34.28	51.67	60.07	68.20	8.13	Peak
5740.150	33.80	8.89	34.28	53.25	61.65	68.20	6.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

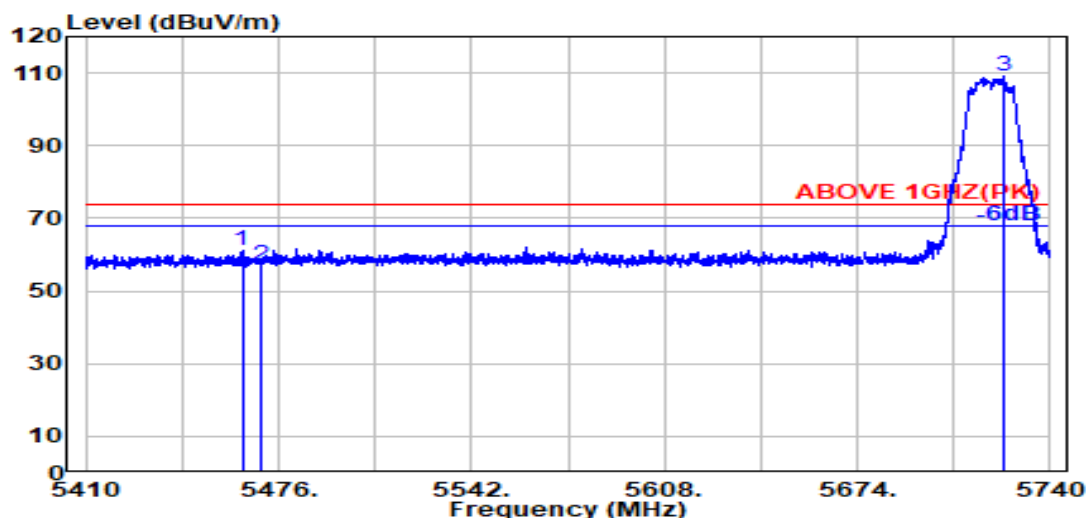

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.17	8.73	34.18	52.21	60.93	74.00	13.07	Peak
5470.000	34.16	8.74	34.18	48.50	57.22	74.00	16.78	Peak
@ 5724.000	33.80	8.88	34.28	100.53	108.93	---	---	Peak

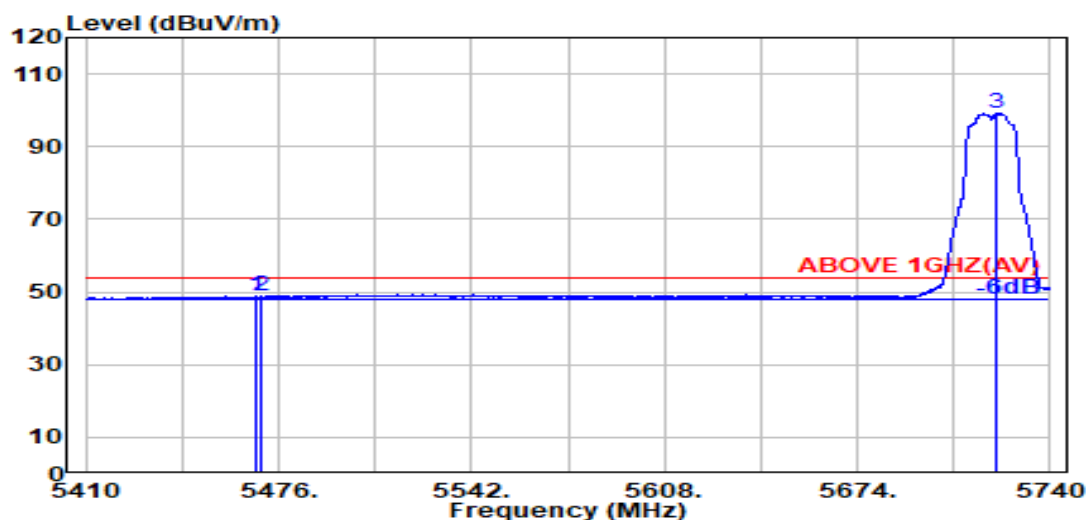

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	39.99	48.71	54.00	5.29	Average
5470.000	34.16	8.74	34.18	39.97	48.68	54.00	5.32	Average
@ 5721.700	33.80	8.88	34.27	90.68	99.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

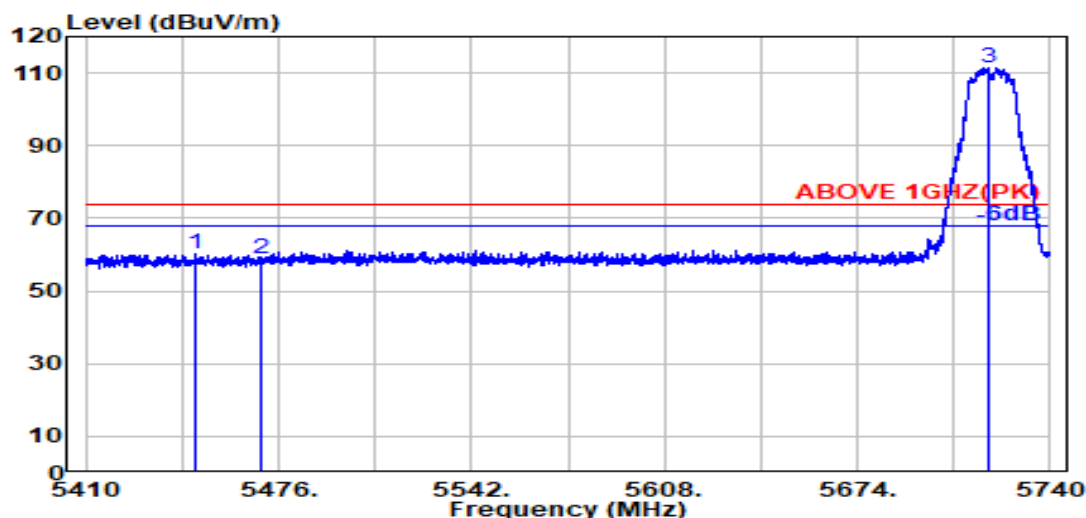

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.600	34.20	8.72	34.19	51.27	60.00	74.00	14.00	Peak
5470.000	34.16	8.74	34.18	50.13	58.85	74.00	15.15	Peak
@ 5718.900	33.80	8.88	34.27	103.01	111.41	---	---	Peak

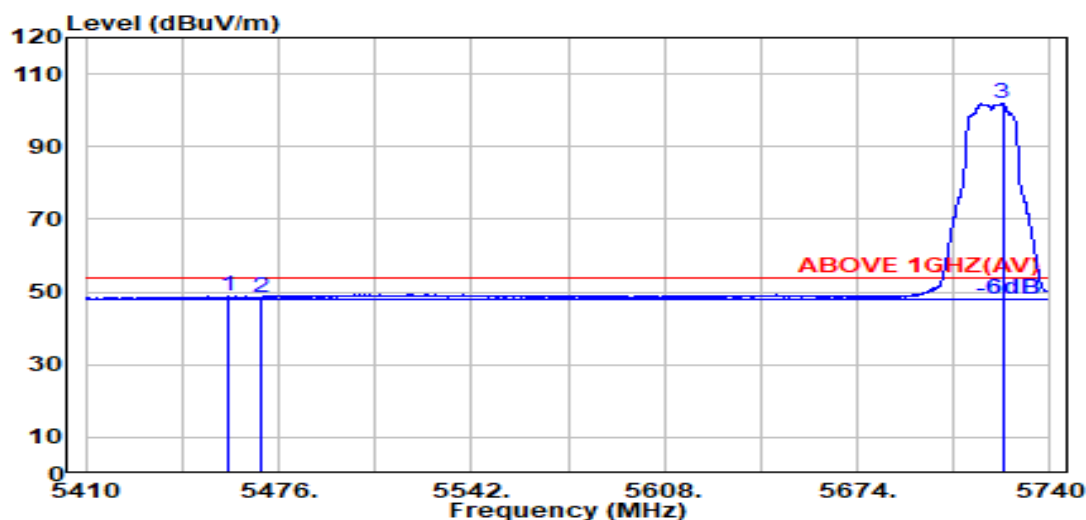

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.18	8.73	34.18	39.98	48.71	54.00	5.29	Average
5470.000	34.16	8.74	34.18	39.88	48.60	54.00	5.40	Average
@ 5723.700	33.80	8.88	34.28	93.39	101.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

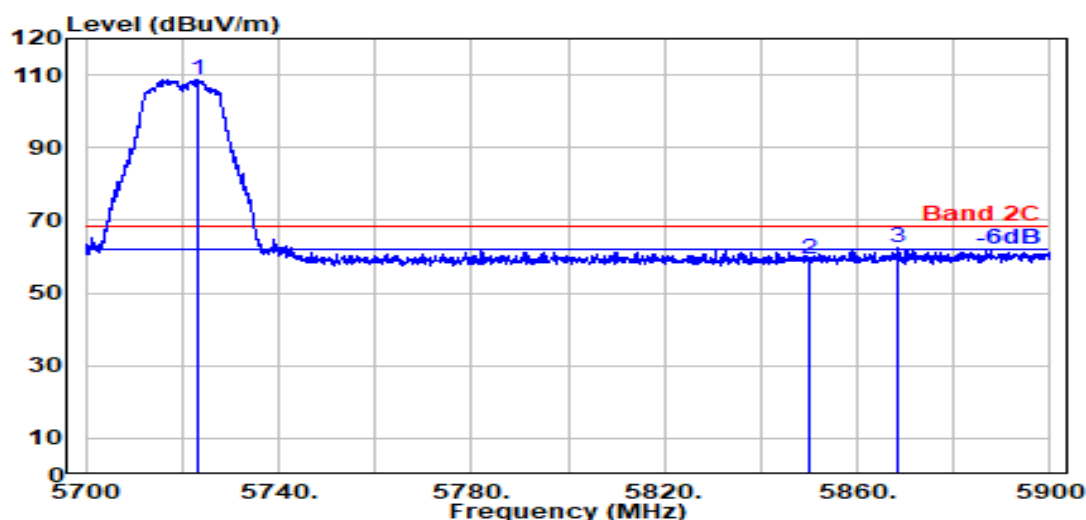

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.300	33.80	8.88	34.28	100.35	108.75	---	---	Peak
5850.000	34.10	8.95	34.33	50.83	59.55	68.20	8.65	Peak
5868.500	34.10	8.96	34.34	53.56	62.28	68.20	5.92	Peak

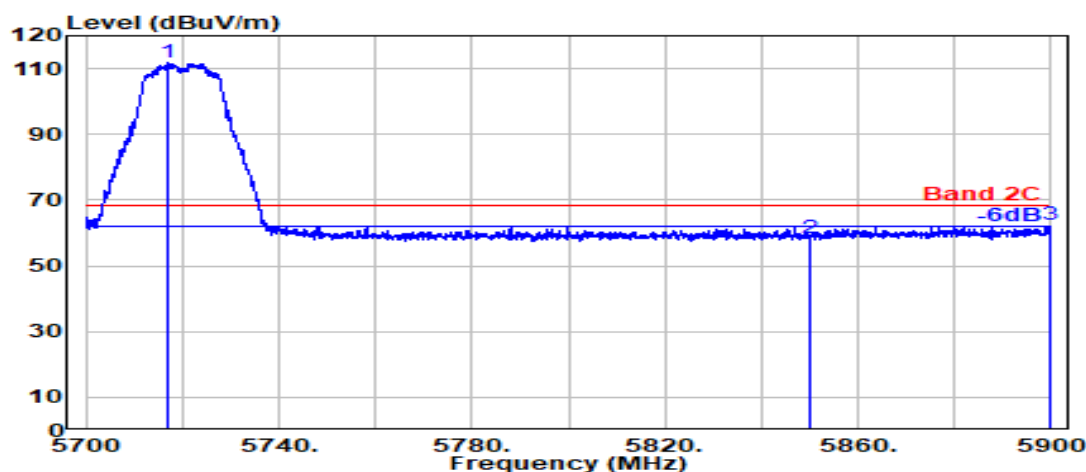

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.000	33.80	8.88	34.27	103.25	111.66	---	---	Peak
5850.000	34.10	8.95	34.33	49.92	58.64	68.20	9.56	Peak
5900.000	34.10	8.98	34.36	53.63	62.35	68.20	5.85	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

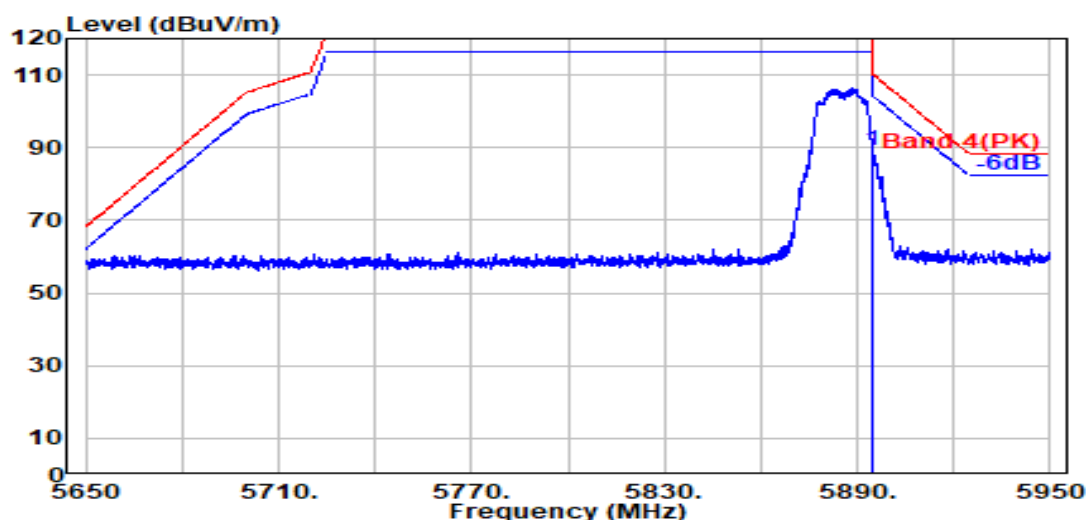

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	80.37	89.09	110.20	21.11	Peak

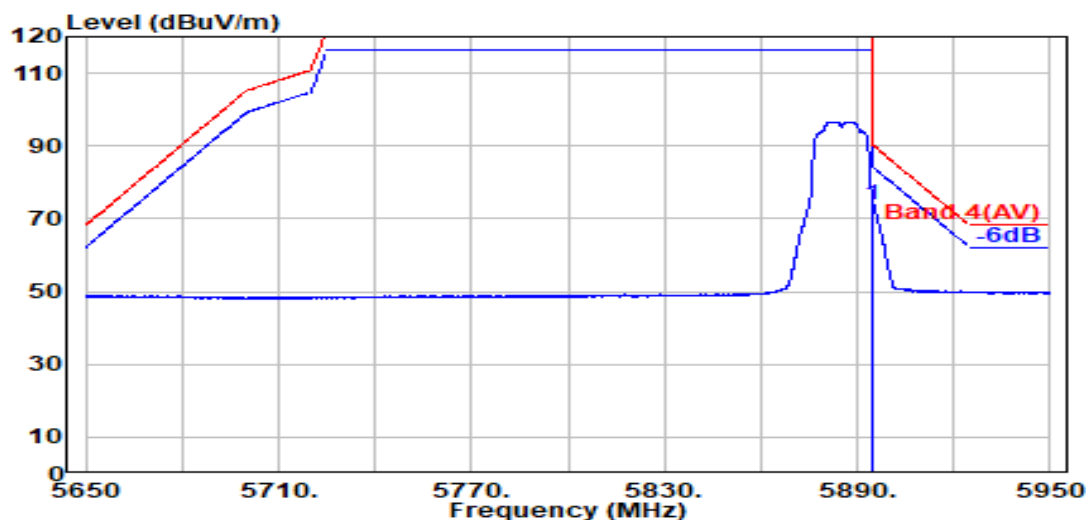

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	65.10	73.82	90.20	16.38	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

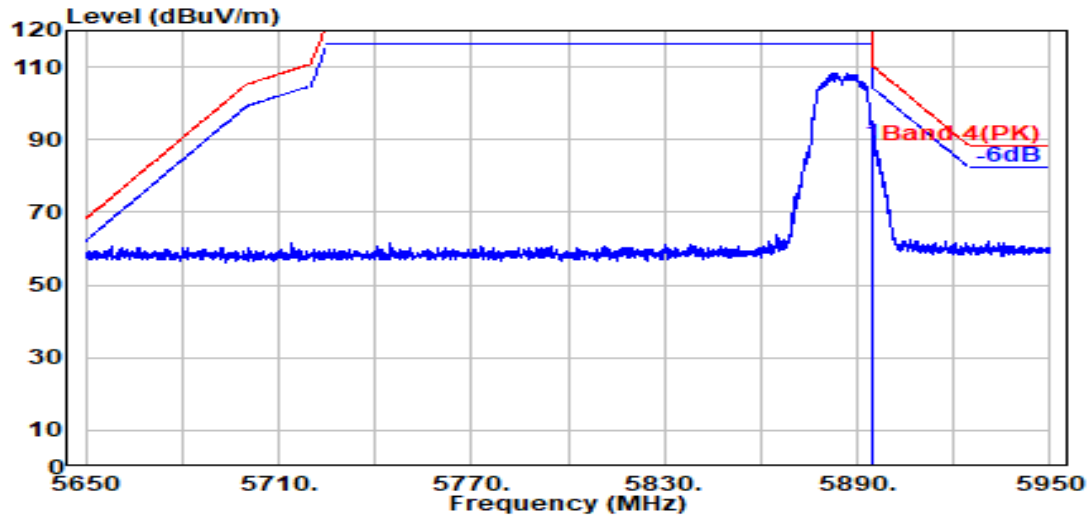

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	80.14	88.86	110.20	21.34	Peak

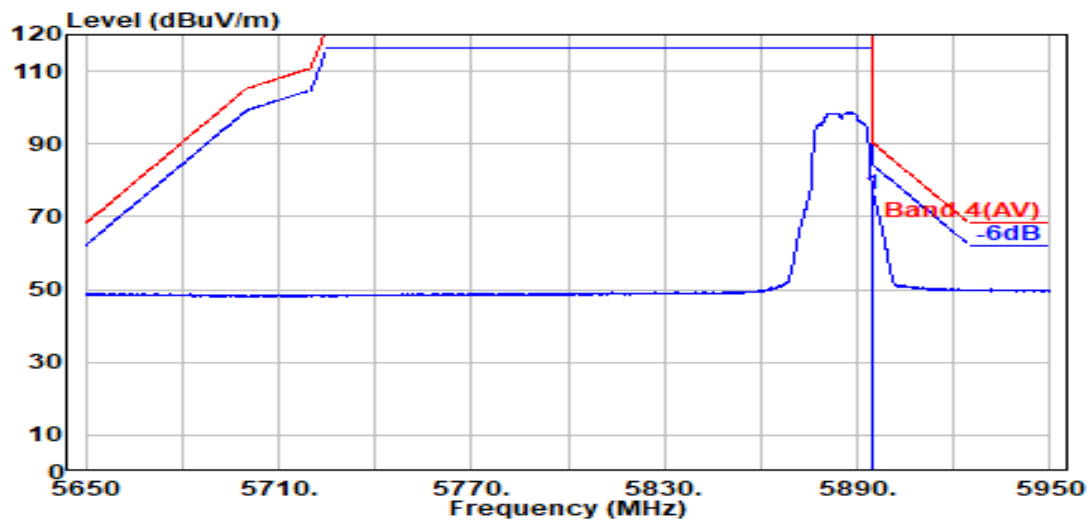

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	67.26	75.98	90.20	14.22	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

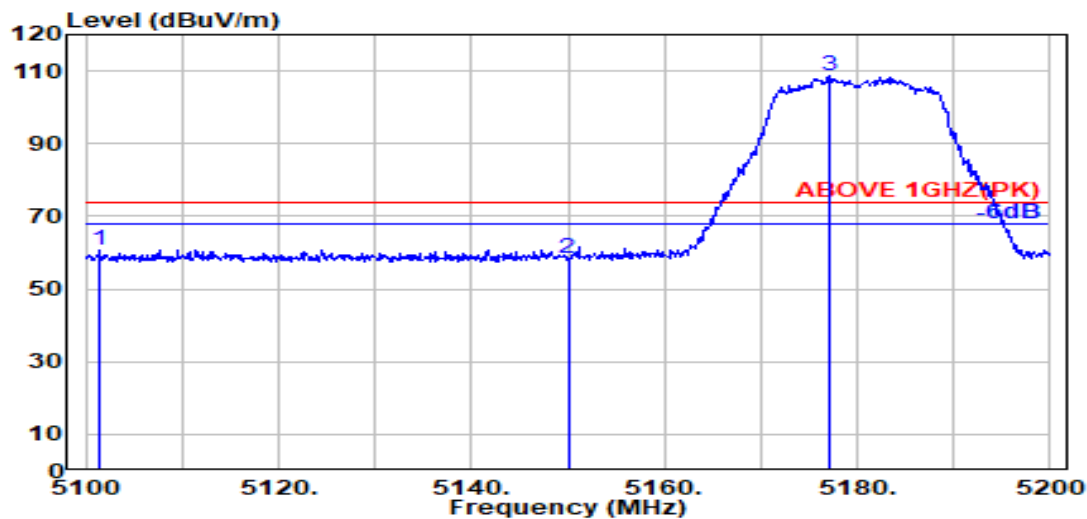

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.400	33.70	8.51	34.30	52.96	60.87	74.00	13.13	Peak
5150.000	33.70	8.54	34.28	50.57	58.53	74.00	15.47	Peak
@ 5177.000	33.70	8.56	34.27	100.61	108.60	---	---	Peak

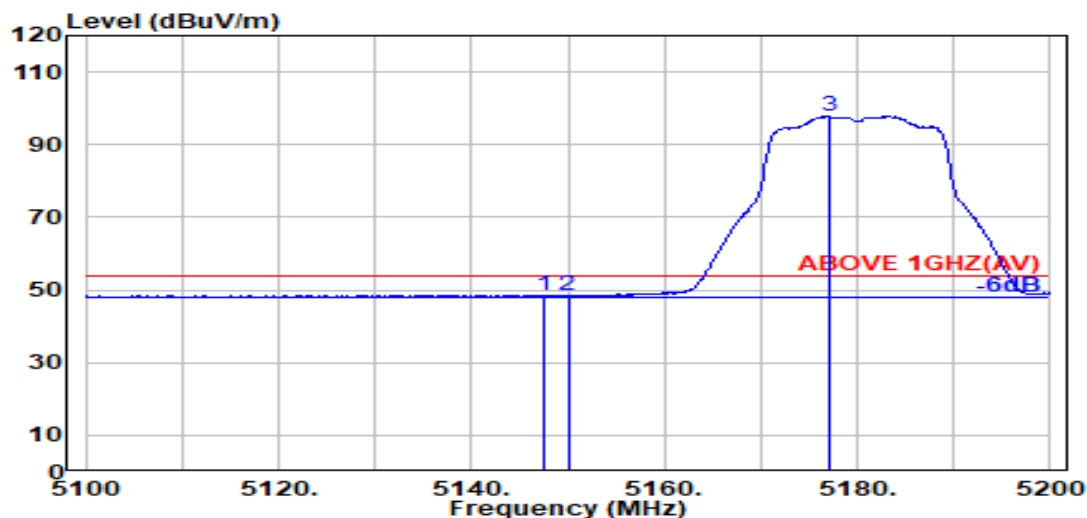

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.70	8.54	34.28	40.68	48.64	54.00	5.36	Average
5150.000	33.70	8.54	34.28	40.46	48.43	54.00	5.57	Average
@ 5177.000	33.70	8.56	34.27	89.82	97.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

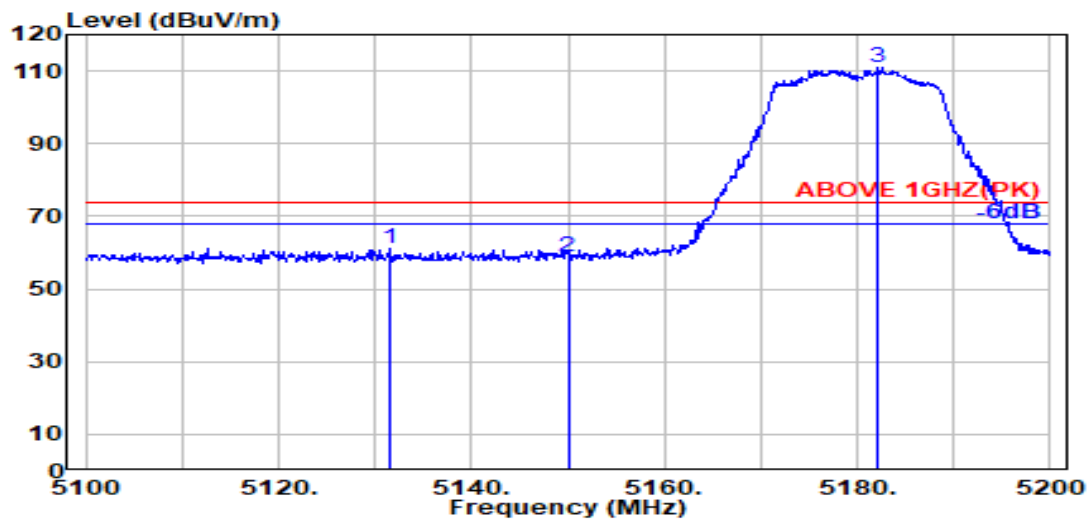

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.500	33.70	8.53	34.29	53.24	61.18	74.00	12.82	Peak
5150.000	33.70	8.54	34.28	50.91	58.87	74.00	15.13	Peak
@ 5182.200	33.70	8.56	34.27	103.14	111.13	---	---	Peak

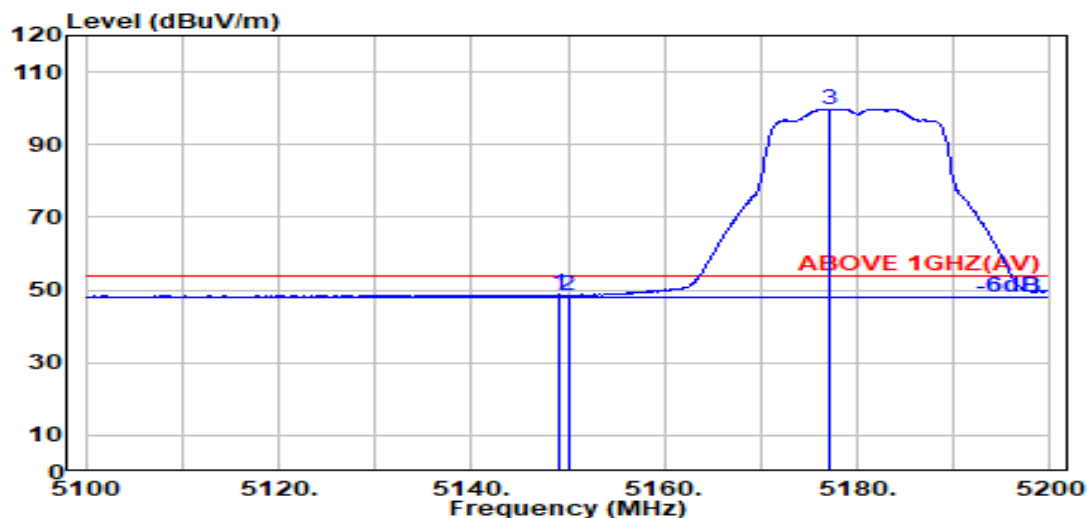

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.70	8.54	34.28	40.80	48.76	54.00	5.24	Average
5150.000	33.70	8.54	34.28	40.51	48.48	54.00	5.52	Average
@ 5177.100	33.70	8.56	34.27	91.67	99.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

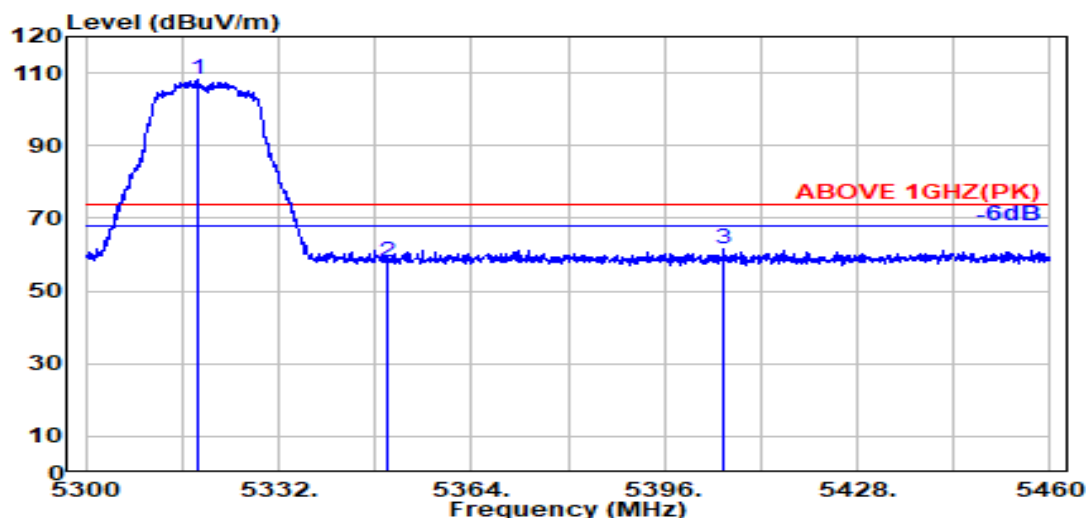

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.600	34.03	8.65	34.23	99.71	108.15	---	---	Peak
5350.000	33.90	8.67	34.22	49.56	57.91	74.00	16.09	Peak
5405.800	34.11	8.70	34.20	52.84	61.45	74.00	12.55	Peak

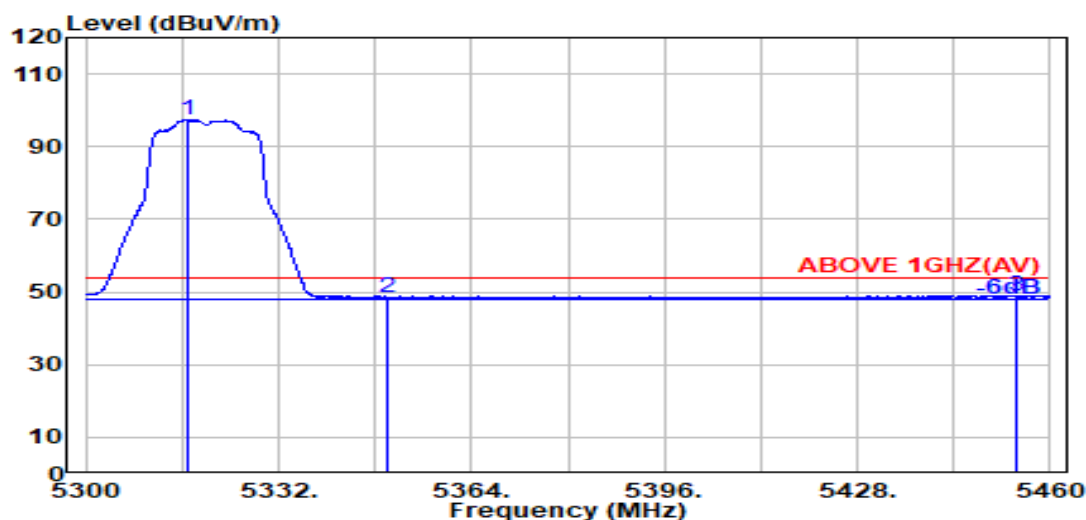

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.100	34.03	8.65	34.23	89.00	97.45	---	---	Average
5350.000	33.90	8.67	34.22	40.22	48.57	54.00	5.43	Average
5454.400	34.19	8.73	34.18	40.27	49.00	54.00	5.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

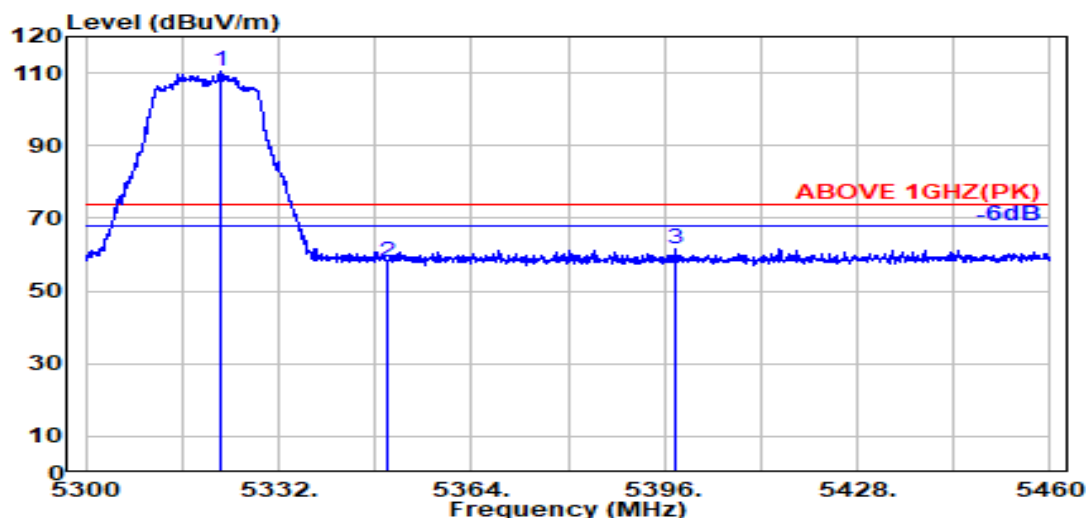

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.300	34.01	8.65	34.23	102.04	110.48	---	---	Peak
5350.000	33.90	8.67	34.22	49.71	58.06	74.00	15.94	Peak
5397.900	34.09	8.69	34.20	52.96	61.54	74.00	12.46	Peak

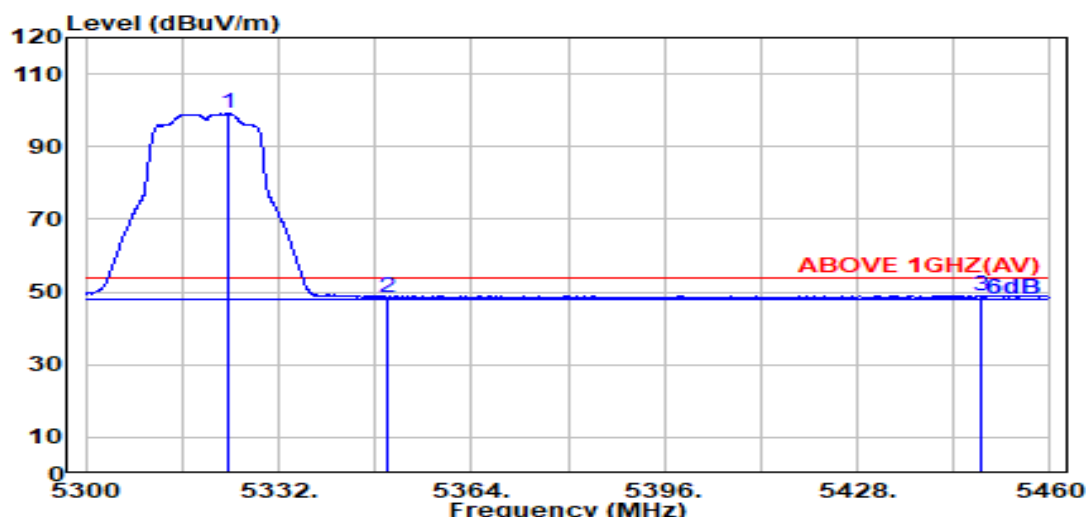

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.00	8.65	34.22	90.87	99.30	---	---	Average
5350.000	33.90	8.67	34.22	40.19	48.54	54.00	5.46	Average
5448.700	34.20	8.72	34.19	40.37	49.10	54.00	4.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

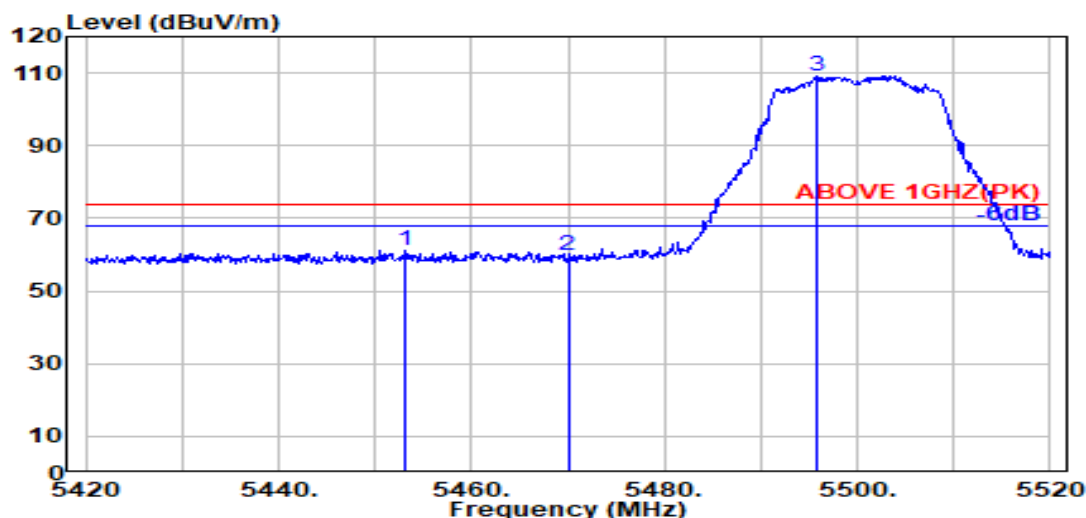

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.000	34.19	8.73	34.18	52.51	61.24	74.00	12.76	Peak
5470.000	34.16	8.74	34.18	51.24	59.96	74.00	14.04	Peak
@ 5495.700	34.11	8.75	34.17	100.61	109.30	---	---	Peak

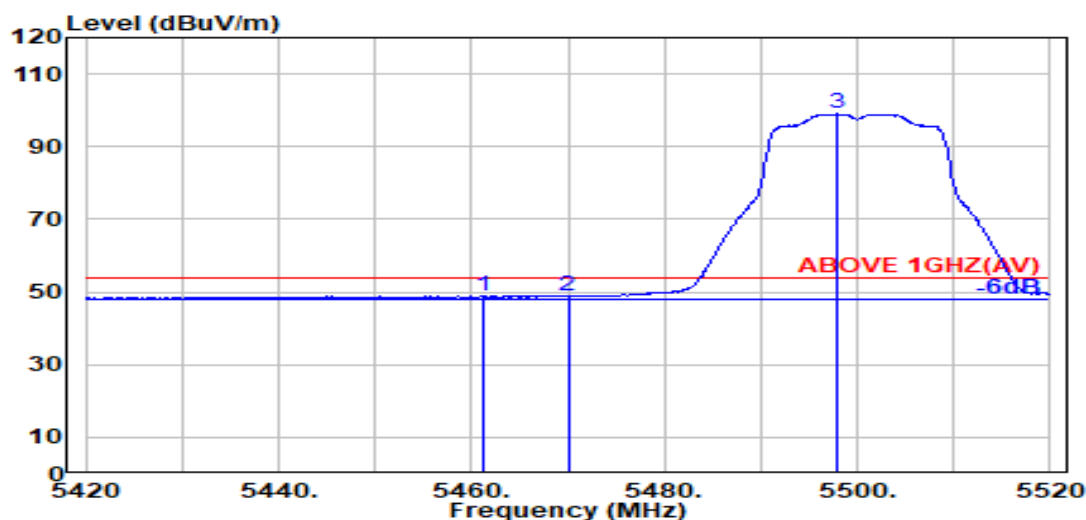

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.18	8.73	34.18	40.17	48.89	54.00	5.11	Average
5470.000	34.16	8.74	34.18	40.16	48.88	54.00	5.12	Average
@ 5498.000	34.10	8.75	34.17	90.30	98.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

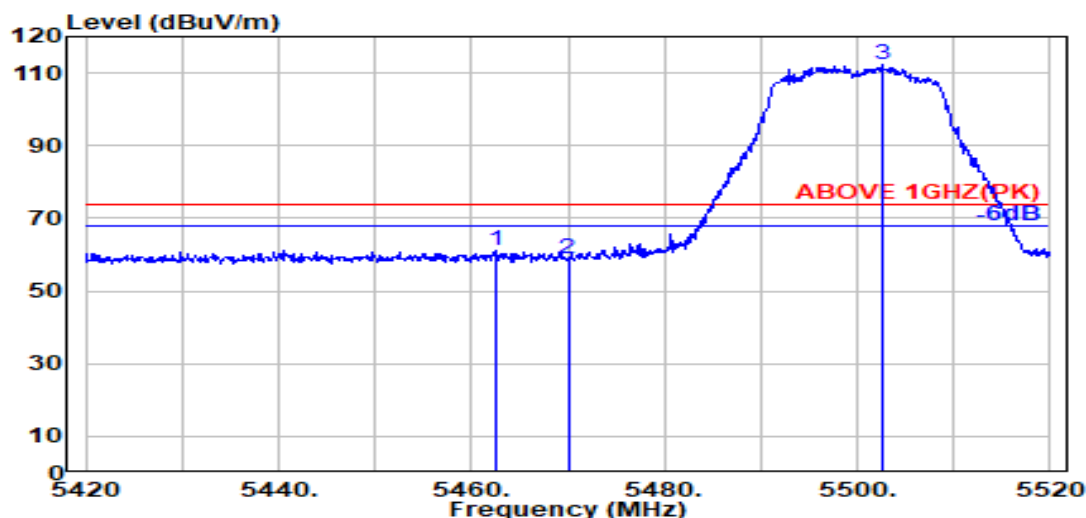

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.17	8.73	34.18	52.35	61.08	74.00	12.92	Peak
5470.000	34.16	8.74	34.18	49.93	58.65	74.00	15.35	Peak
@ 5502.500	34.10	8.75	34.17	103.72	112.40	---	---	Peak

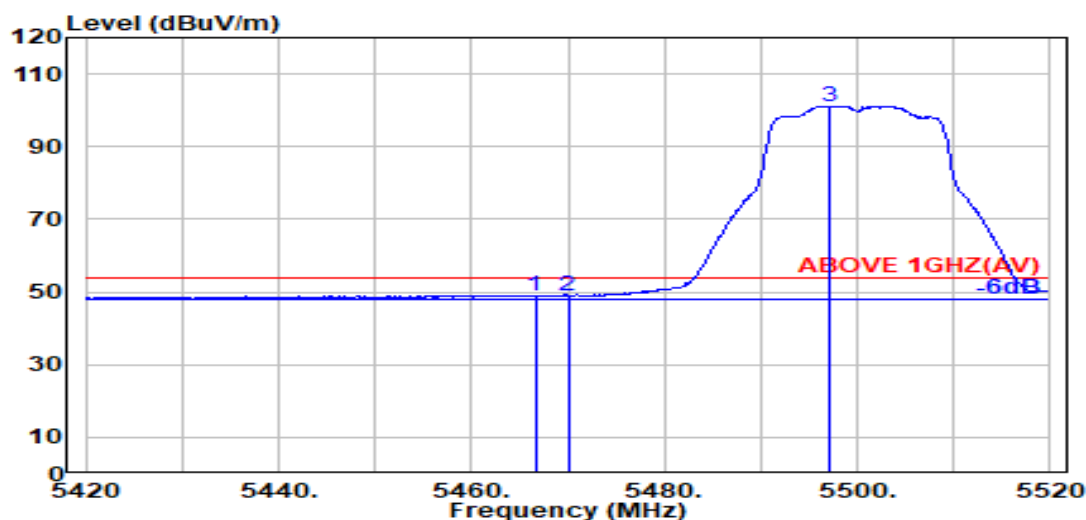

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.17	8.73	34.18	40.38	49.10	54.00	4.90	Average
5470.000	34.16	8.74	34.18	40.40	49.11	54.00	4.89	Average
@ 5497.200	34.11	8.75	34.17	92.42	101.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

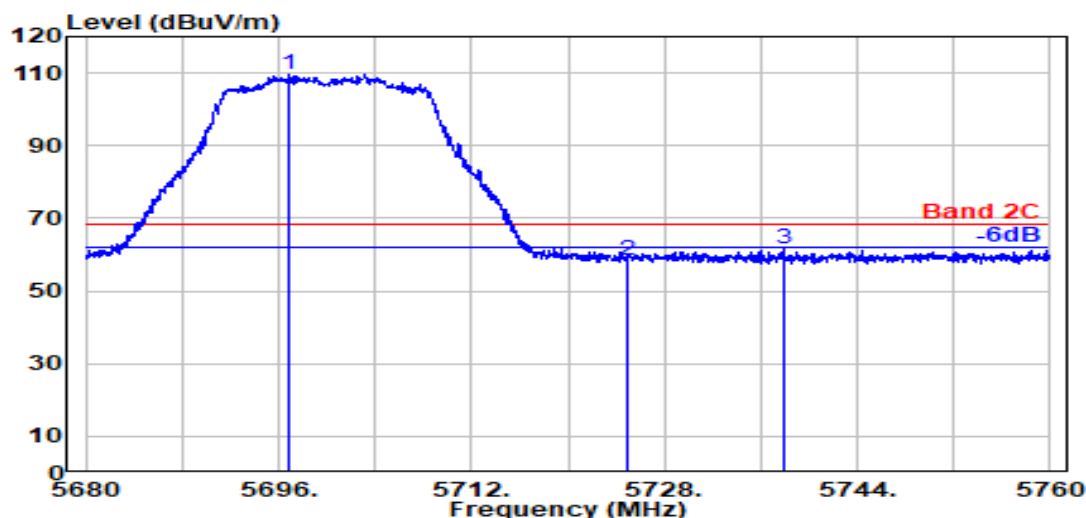

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.800	33.81	8.87	34.26	101.05	109.46	---	---	Peak
5725.000	33.80	8.88	34.28	50.00	58.40	68.20	9.80	Peak
5737.900	33.80	8.89	34.28	53.29	61.70	68.20	6.50	Peak

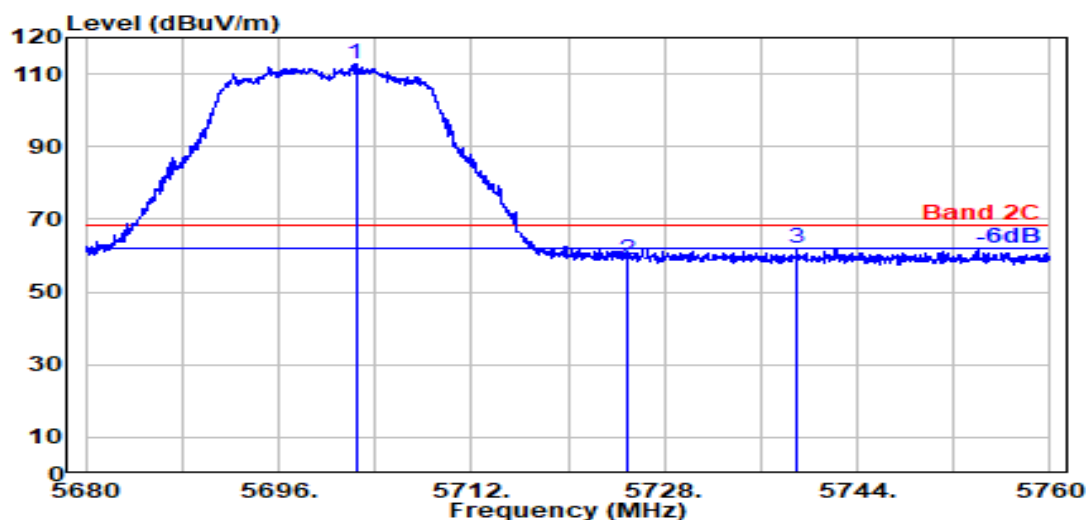

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.400	33.80	8.87	34.27	104.40	112.81	---	---	Peak
5725.000	33.80	8.88	34.28	50.29	58.70	68.20	9.50	Peak
5739.050	33.80	8.89	34.28	53.74	62.15	68.20	6.05	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

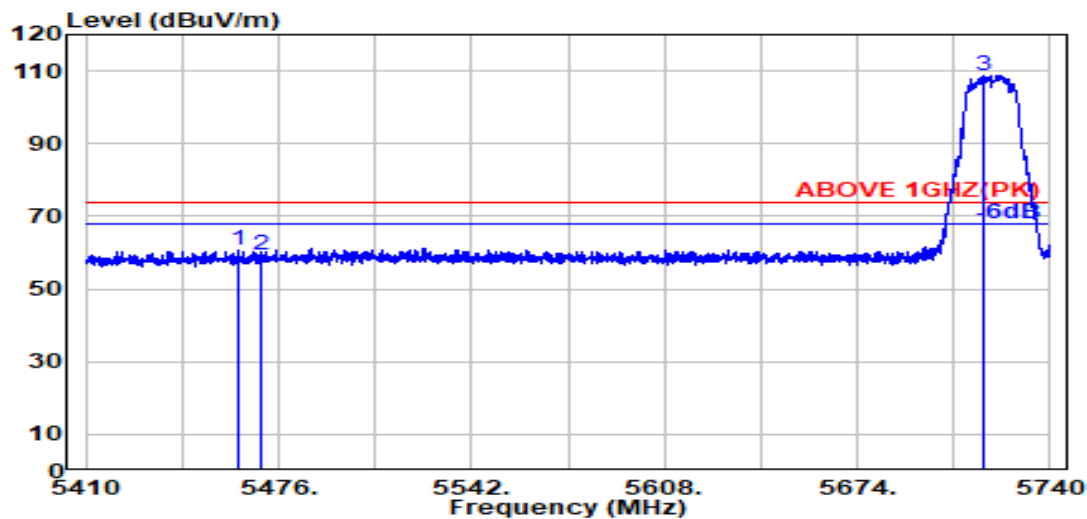

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.200	34.18	8.73	34.18	52.03	60.76	74.00	13.24	Peak
5470.000	34.16	8.74	34.18	50.56	59.27	74.00	14.73	Peak
@ 5717.300	33.80	8.88	34.27	100.39	108.80	---	---	Peak

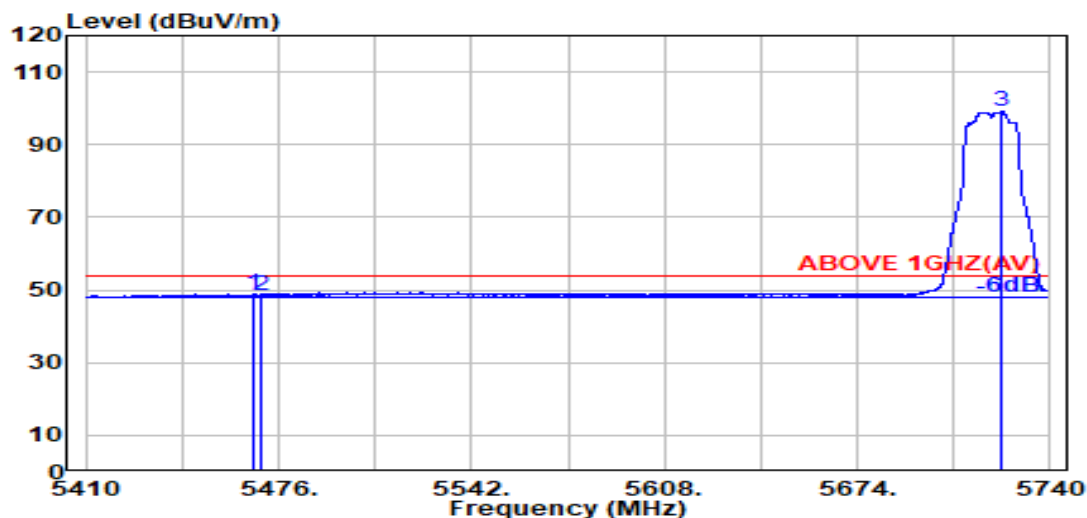

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.16	8.73	34.18	40.19	48.91	54.00	5.09	Average
5470.000	34.16	8.74	34.18	39.69	48.41	54.00	5.59	Average
@ 5723.100	33.80	8.88	34.28	90.59	99.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

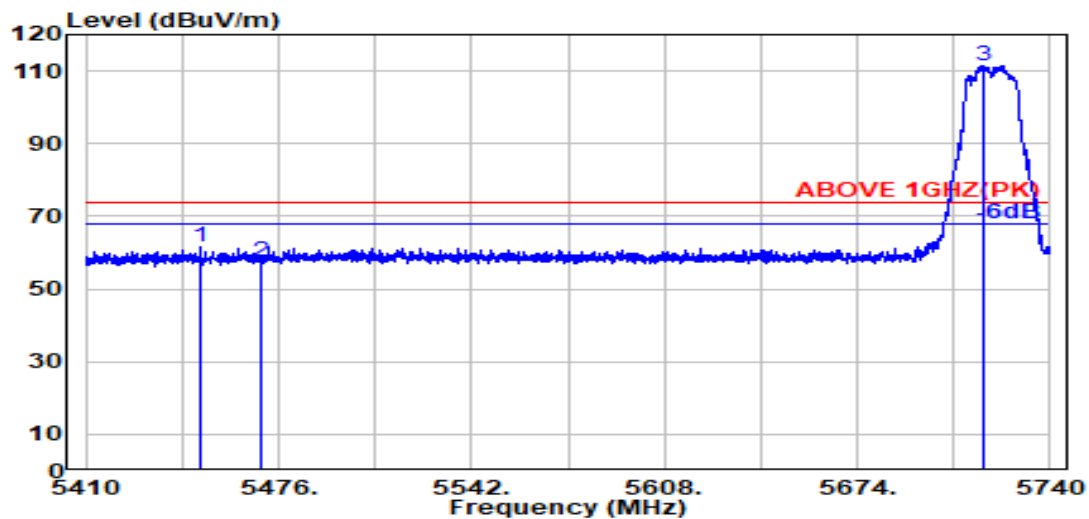

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.000	34.20	8.72	34.19	52.77	61.50	74.00	12.50	Peak
5470.000	34.16	8.74	34.18	48.98	57.69	74.00	16.31	Peak
@ 5716.900	33.80	8.88	34.27	102.94	111.34	---	---	Peak

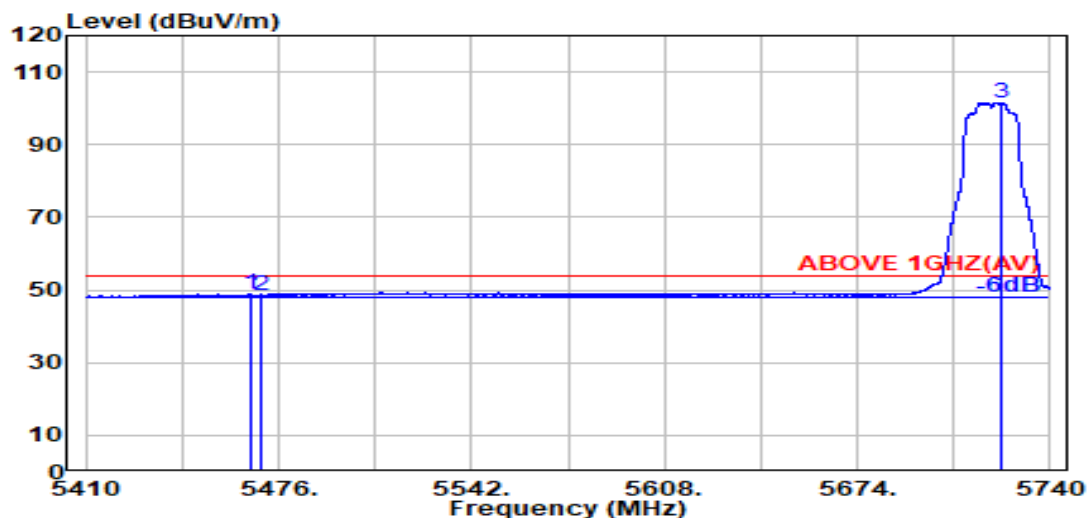

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.17	8.73	34.18	40.15	48.87	54.00	5.13	Average
5470.000	34.16	8.74	34.18	39.83	48.55	54.00	5.45	Average
@ 5723.200	33.80	8.88	34.28	93.08	101.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

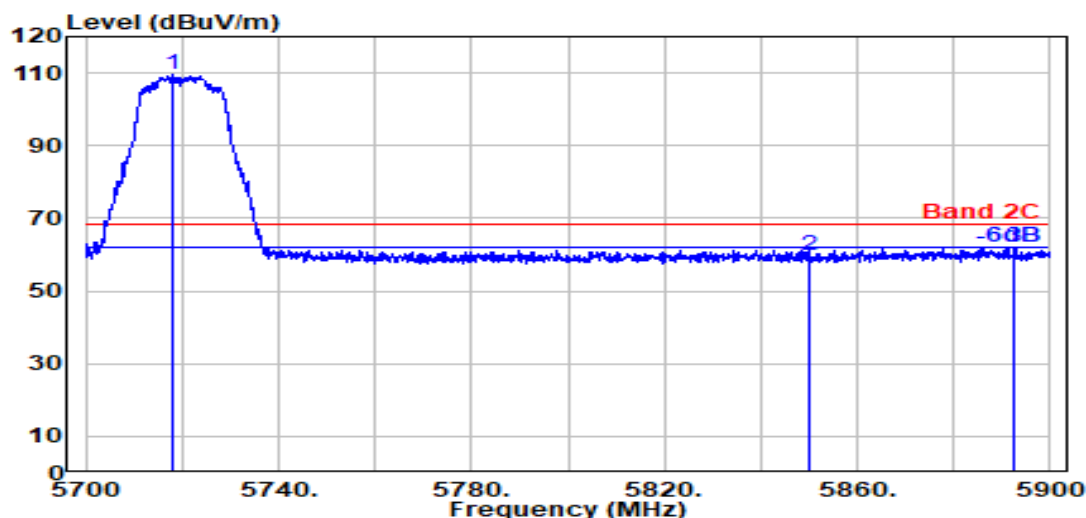

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.200	33.80	8.88	34.27	101.23	109.64	---	---	Peak
5850.000	34.10	8.95	34.33	50.87	59.58	68.20	8.62	Peak
5892.600	34.10	8.97	34.35	53.12	61.84	68.20	6.36	Peak

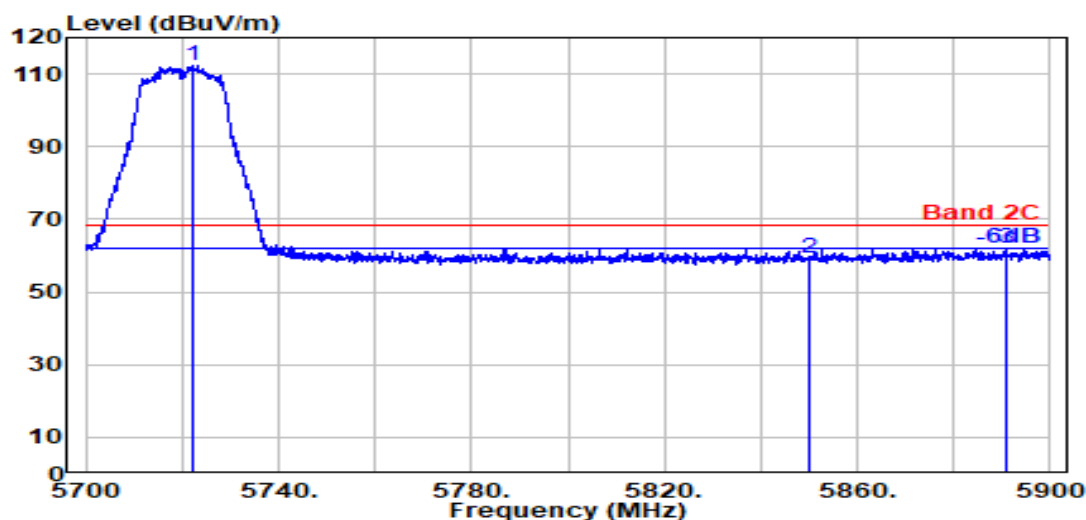

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.300	33.80	8.88	34.27	103.89	112.29	---	---	Peak
5850.000	34.10	8.95	34.33	50.71	59.43	68.20	8.77	Peak
5891.000	34.10	8.97	34.35	53.49	62.21	68.20	5.99	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

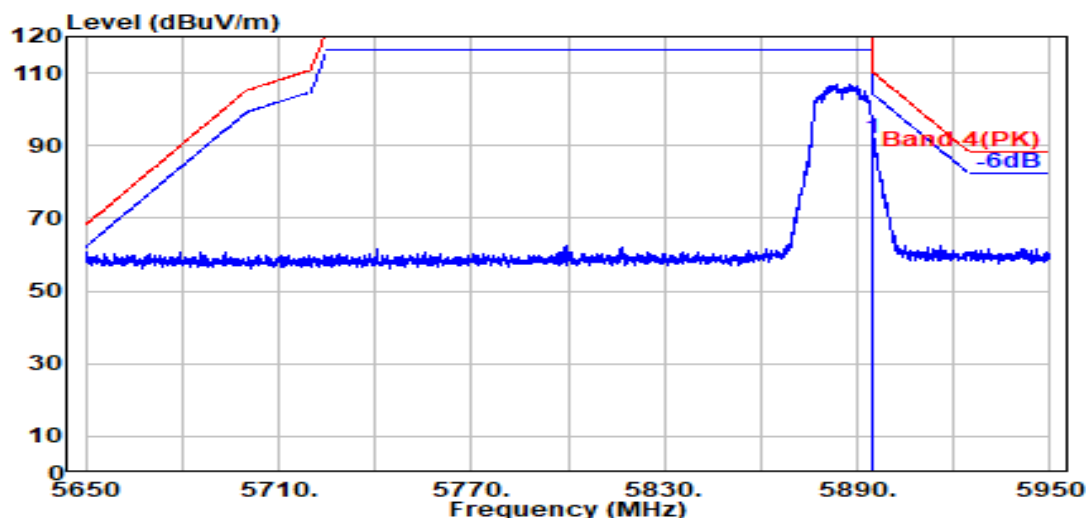

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	83.38	92.10	110.20	18.10	Peak

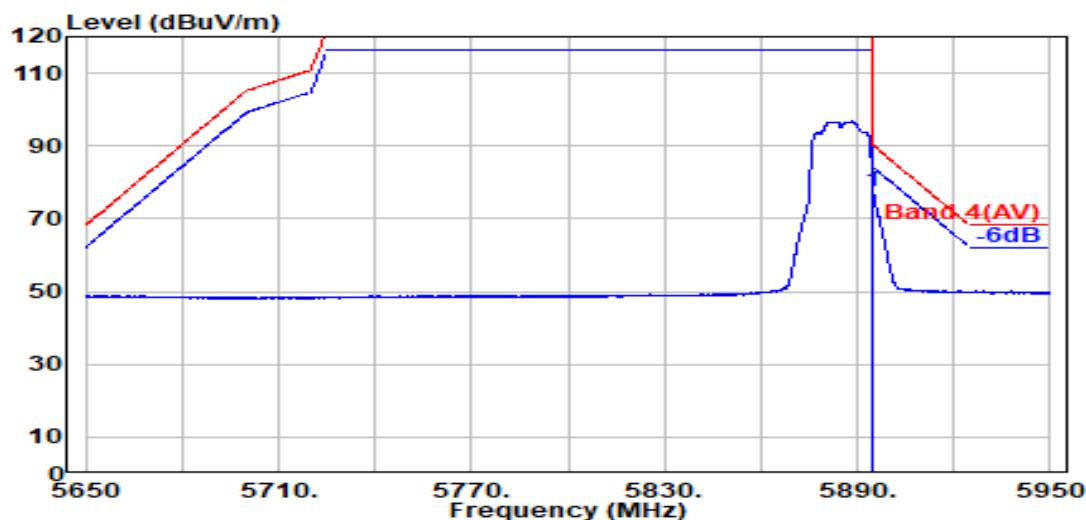

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	68.66	77.38	90.20	12.82	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

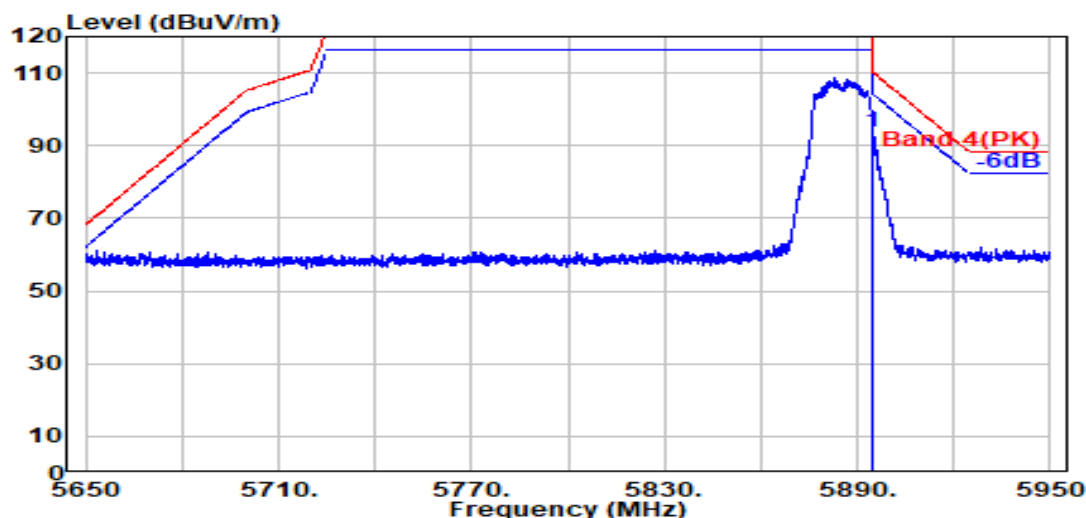

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	85.06	93.78	110.20	16.42	Peak

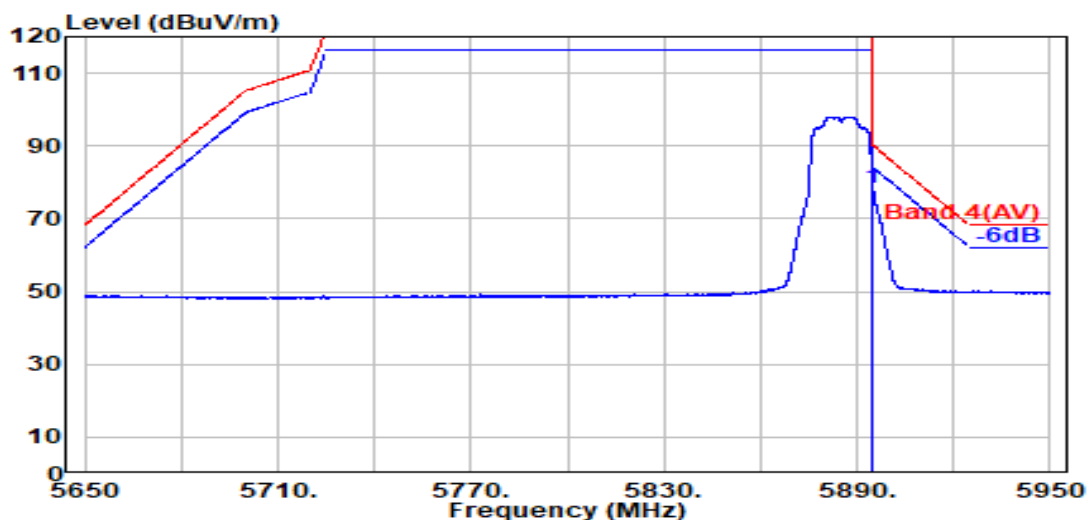

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	69.44	78.16	90.20	12.04	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

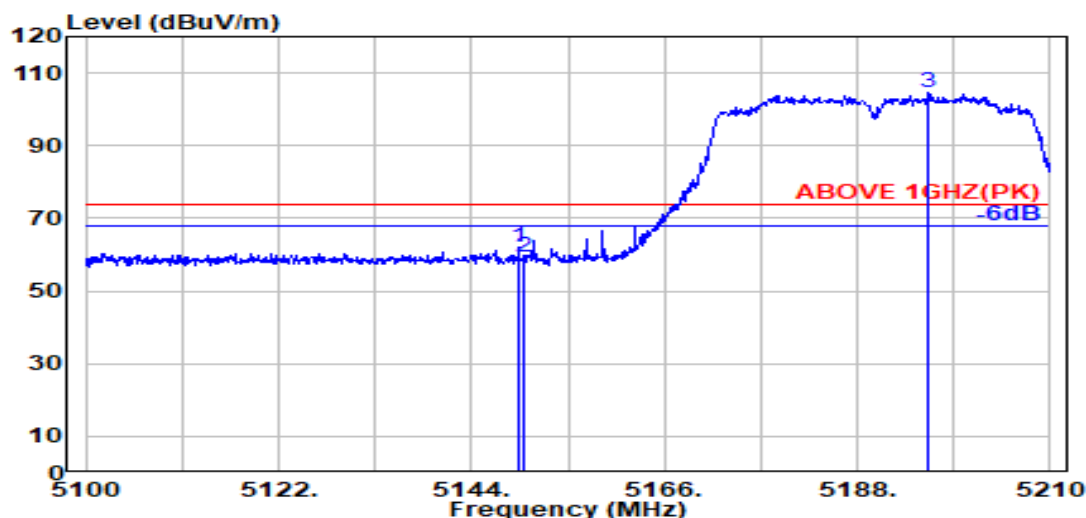

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.28	53.98	61.94	74.00	12.06	Peak
5150.000	33.70	8.54	34.28	51.23	59.20	74.00	14.80	Peak
@ 5196.000	33.70	8.57	34.27	96.44	104.44	---	---	Peak

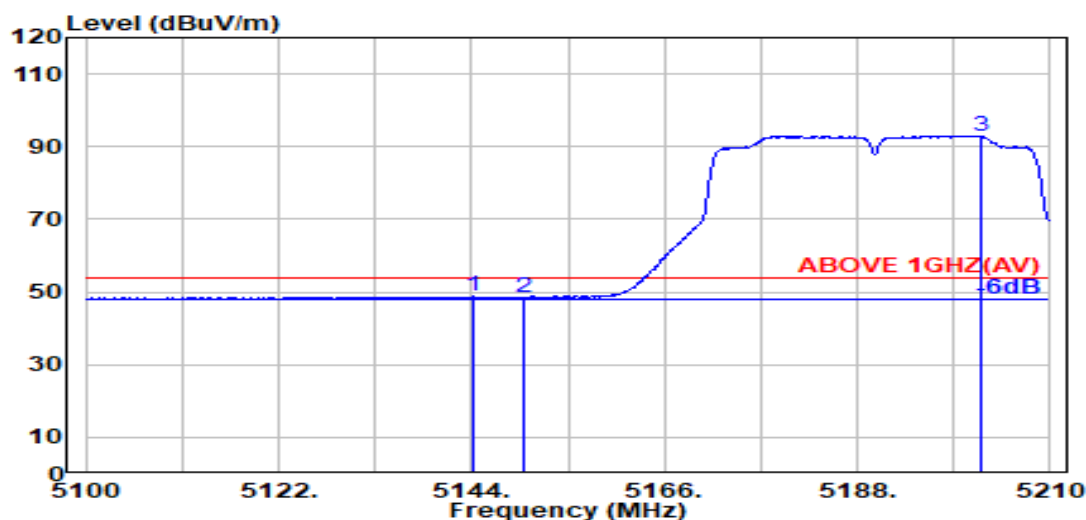

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.200	33.70	8.54	34.28	40.73	48.69	54.00	5.31	Average
5150.000	33.70	8.54	34.28	40.52	48.48	54.00	5.52	Average
@ 5202.000	33.70	8.58	34.26	85.01	93.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

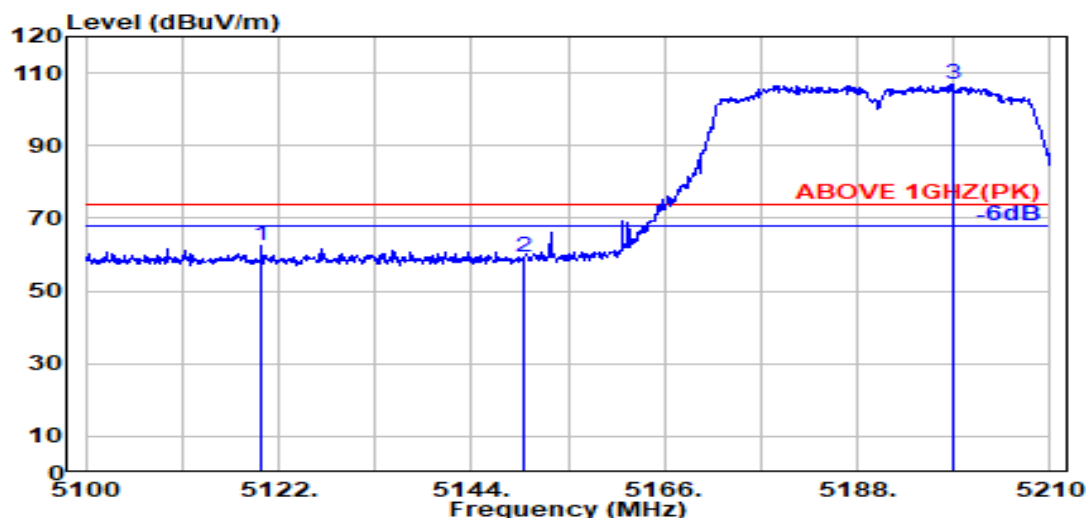

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.100	33.70	8.53	34.29	54.35	62.29	74.00	11.71	Peak
5150.000	33.70	8.54	34.28	51.25	59.21	74.00	14.79	Peak
@ 5198.900	33.70	8.57	34.26	98.85	106.86	---	---	Peak

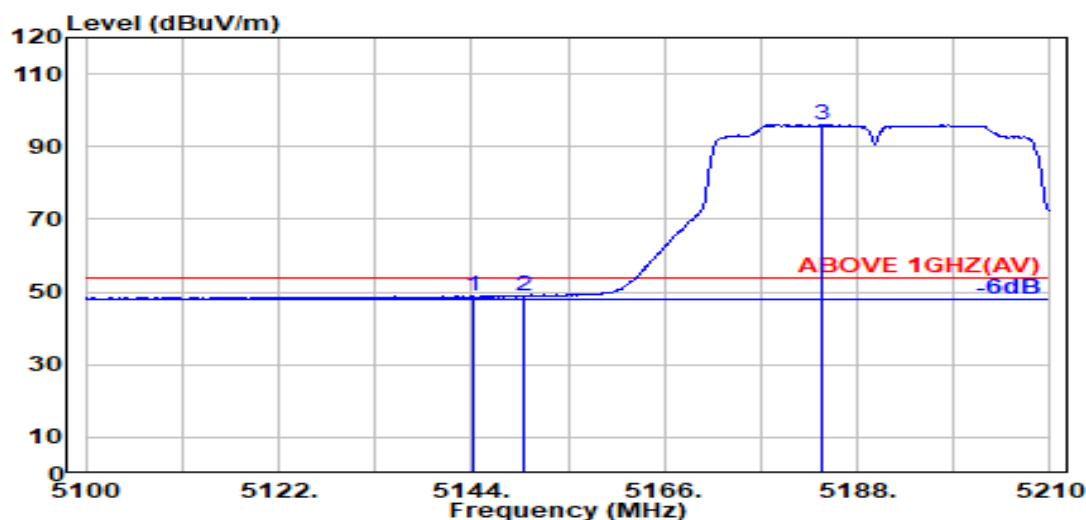

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	33.70	8.54	34.28	41.02	48.98	54.00	5.02	Average
5150.000	33.70	8.54	34.28	41.10	49.06	54.00	4.94	Average
@ 5183.900	33.70	8.56	34.27	88.11	96.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

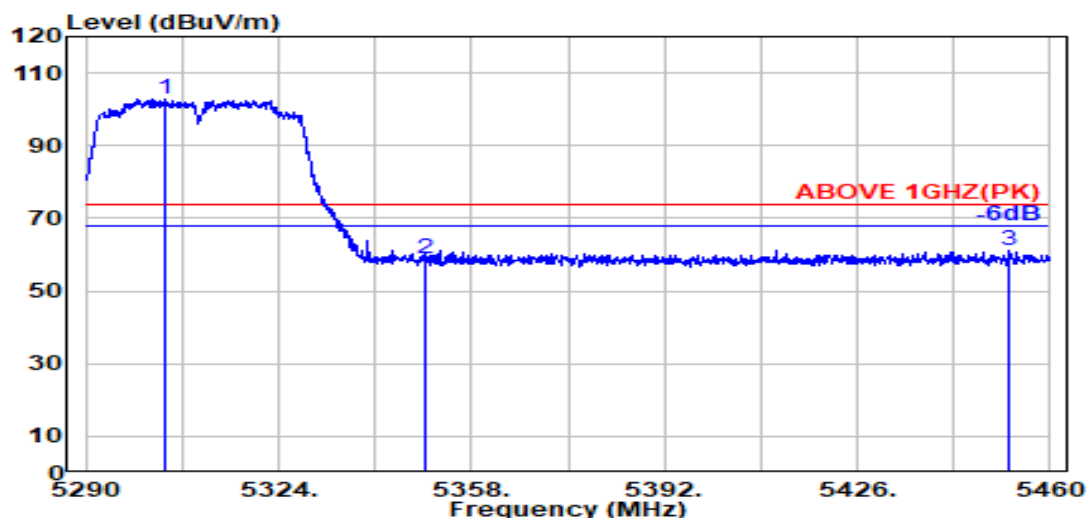

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.100	34.08	8.64	34.23	94.26	102.75	---	---	Peak
5350.000	33.90	8.67	34.22	50.53	58.87	74.00	15.13	Peak
5452.700	34.19	8.73	34.18	52.61	61.35	74.00	12.65	Peak

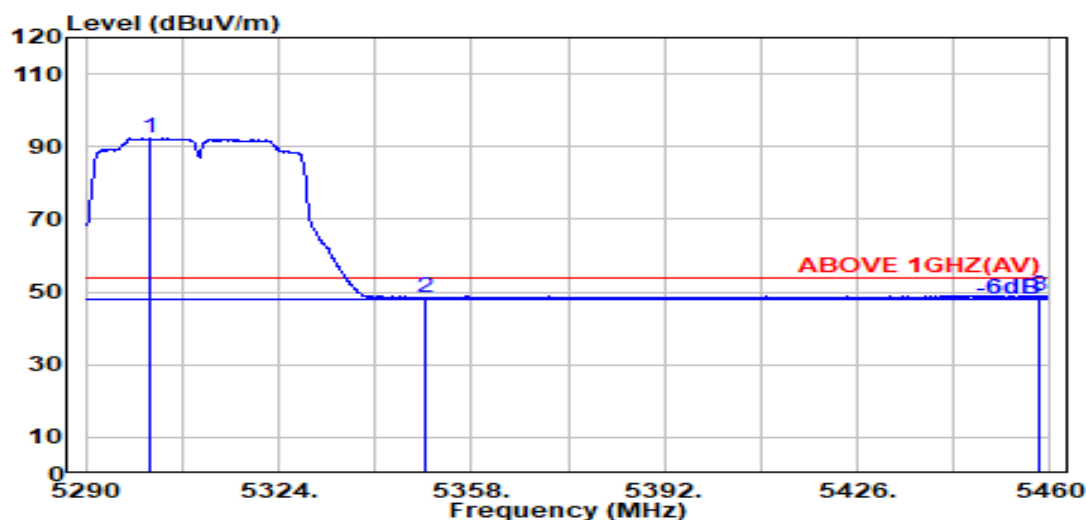

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.100	34.10	8.64	34.23	83.77	92.26	---	---	Average
5350.000	33.90	8.67	34.22	40.04	48.39	54.00	5.61	Average
5458.200	34.18	8.73	34.18	40.39	49.12	54.00	4.88	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

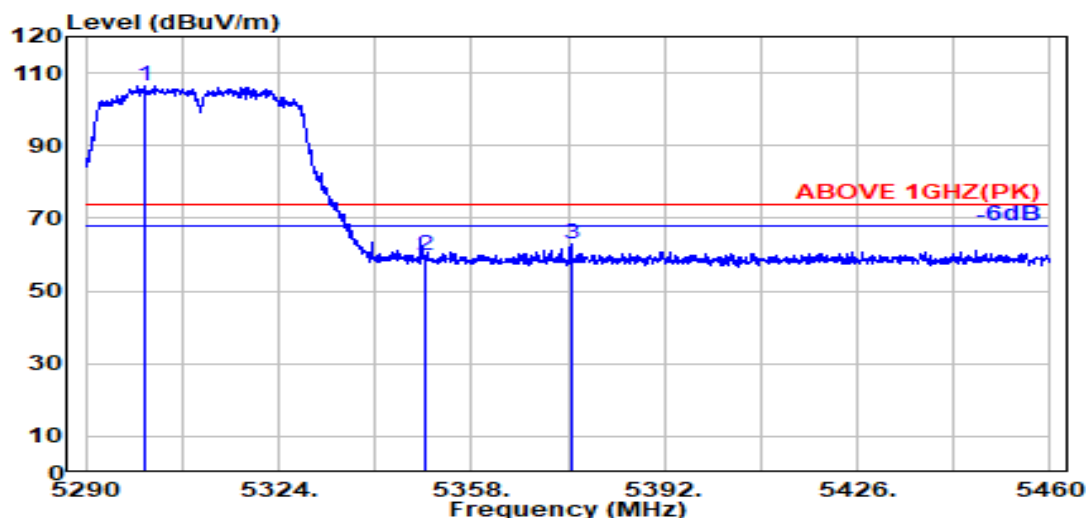

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.600	34.10	8.64	34.23	97.89	106.39	---	---	Peak
5350.000	33.90	8.67	34.22	51.62	59.97	74.00	14.03	Peak
5375.500	34.00	8.68	34.21	54.45	62.92	74.00	11.08	Peak

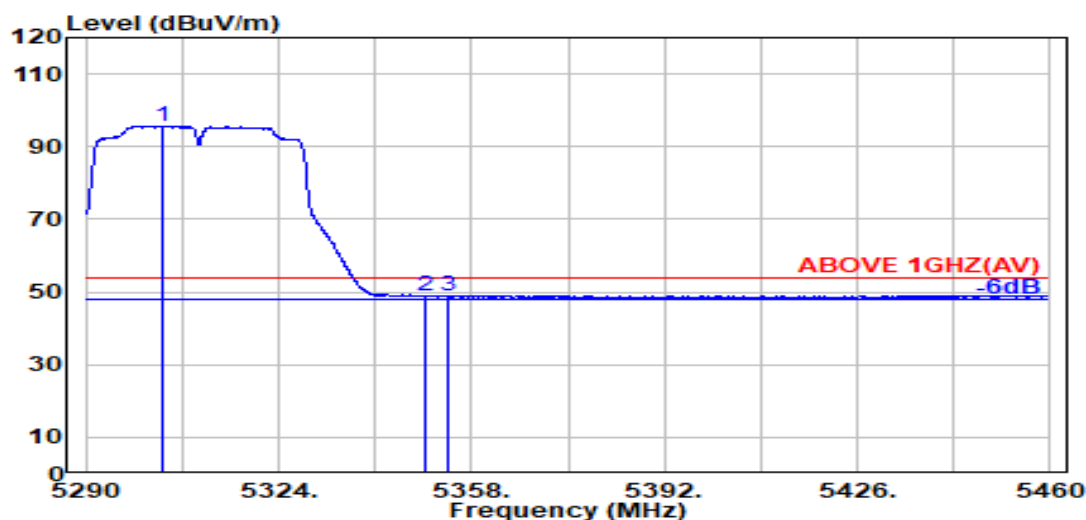

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.500	34.09	8.64	34.23	87.26	95.75	---	---	Average
5350.000	33.90	8.67	34.22	40.61	48.96	54.00	5.04	Average
5353.800	33.92	8.67	34.22	40.70	49.07	54.00	4.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

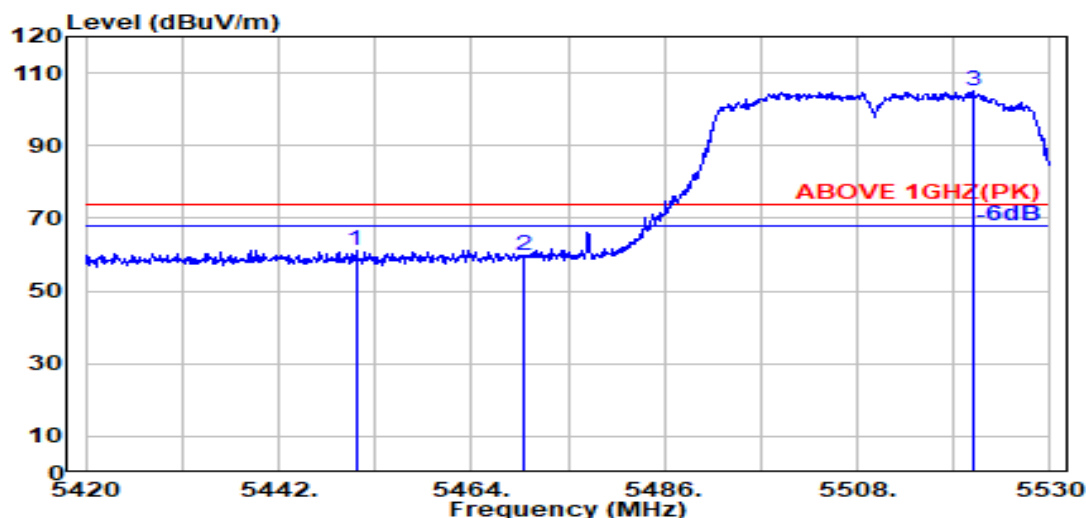

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.800	34.20	8.72	34.19	52.60	61.34	74.00	12.66	Peak
5470.000	34.16	8.74	34.18	51.07	59.79	74.00	14.21	Peak
@ 5521.200	34.10	8.77	34.18	96.42	105.11	---	---	Peak

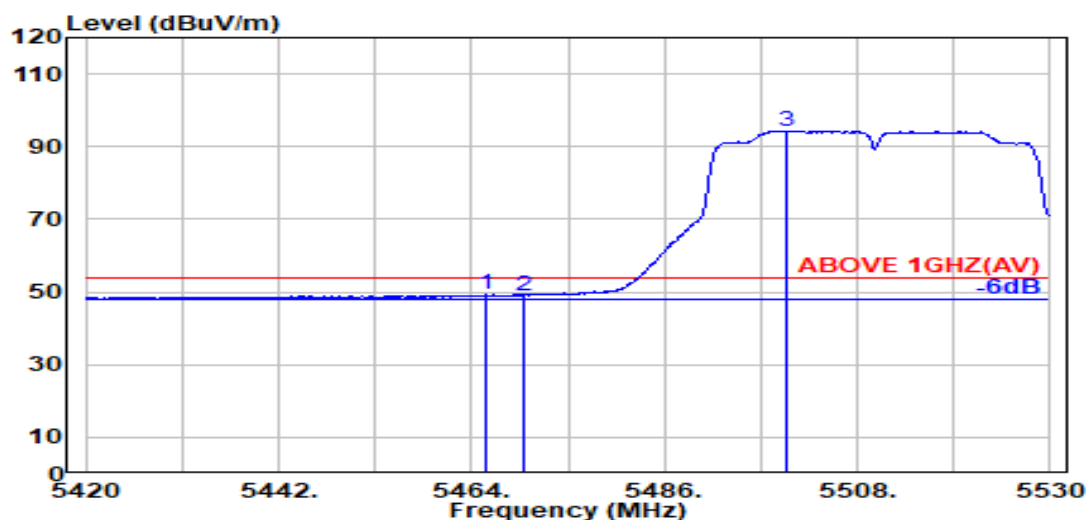

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.17	8.73	34.18	40.54	49.26	54.00	4.74	Average
5470.000	34.16	8.74	34.18	40.37	49.09	54.00	4.91	Average
@ 5499.900	34.10	8.75	34.17	85.58	94.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

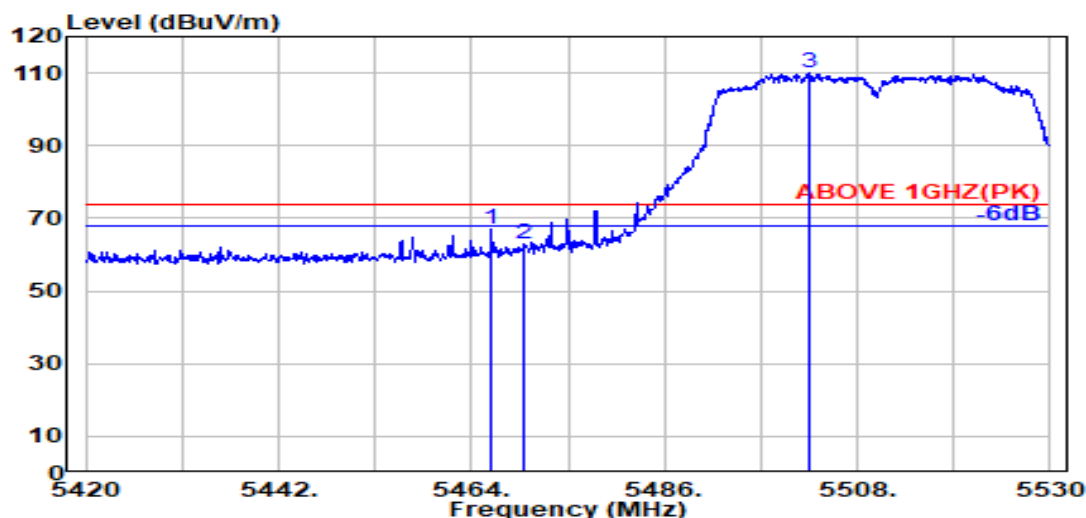

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	58.26	66.98	74.00	7.02	Peak
5470.000	34.16	8.74	34.18	54.10	62.81	74.00	11.19	Peak
@ 5502.600	34.10	8.75	34.17	101.22	109.90	---	---	Peak

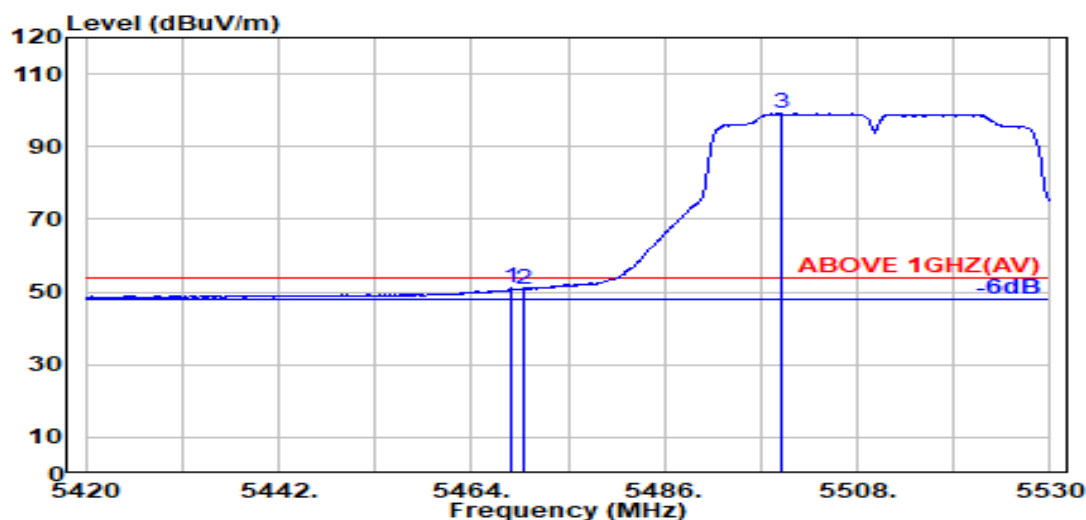

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	42.30	51.02	54.00	2.98	Average
5470.000	34.16	8.74	34.18	42.07	50.79	54.00	3.21	Average
@ 5499.300	34.10	8.75	34.17	90.36	99.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

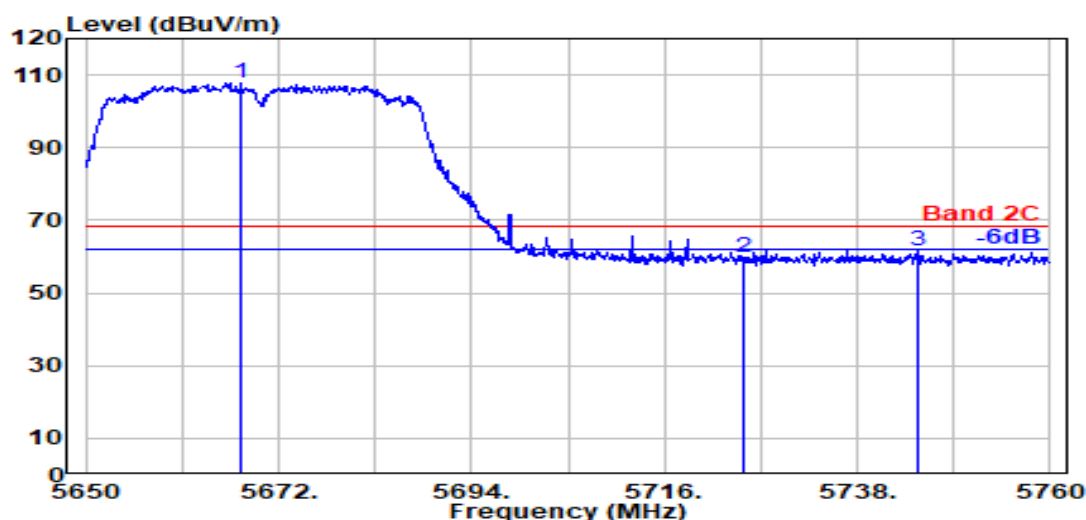

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.700	33.93	8.85	34.25	99.22	107.74	---	---	Peak
5725.000	33.80	8.88	34.28	51.35	59.75	68.20	8.45	Peak
5744.800	33.80	8.89	34.29	53.32	61.73	68.20	6.47	Peak

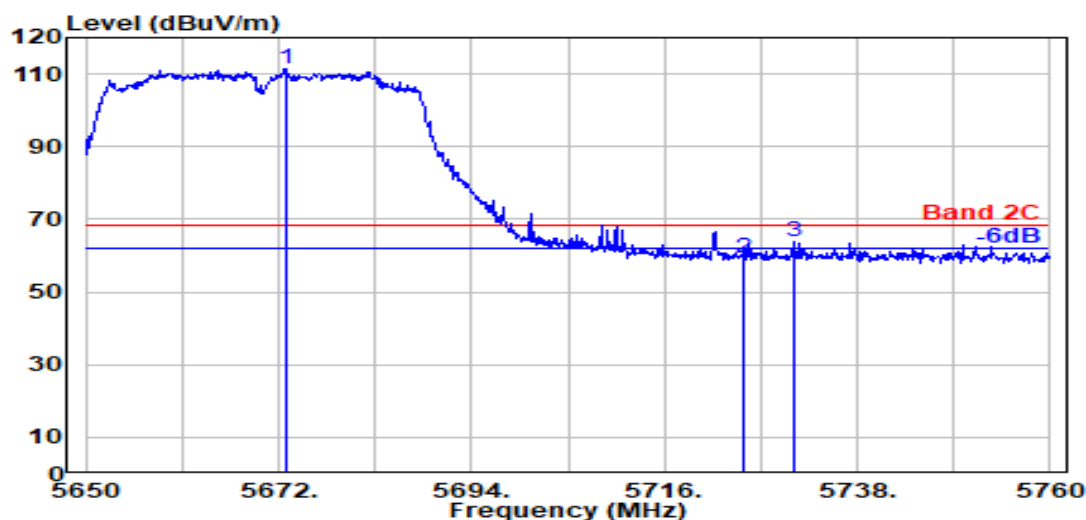

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.800	33.91	8.85	34.25	103.02	111.53	---	---	Peak
5725.000	33.80	8.88	34.28	50.88	59.29	68.20	8.91	Peak
5730.700	33.80	8.88	34.28	55.49	63.89	68.20	4.31	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

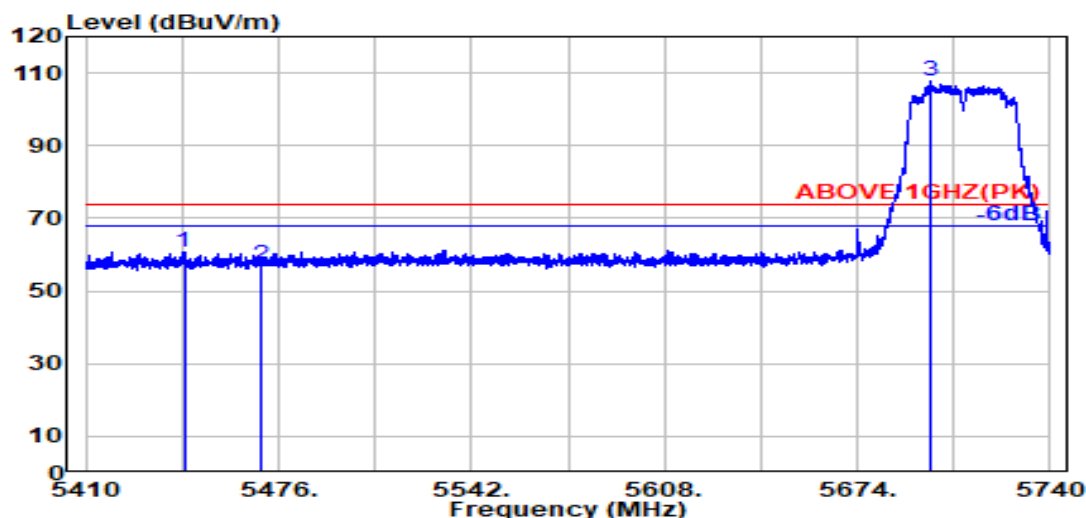

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.600	34.19	8.72	34.19	51.92	60.64	74.00	13.36	Peak
5470.000	34.16	8.74	34.18	48.52	57.23	74.00	16.77	Peak
@ 5699.300	33.80	8.87	34.26	99.18	107.58	---	---	Peak

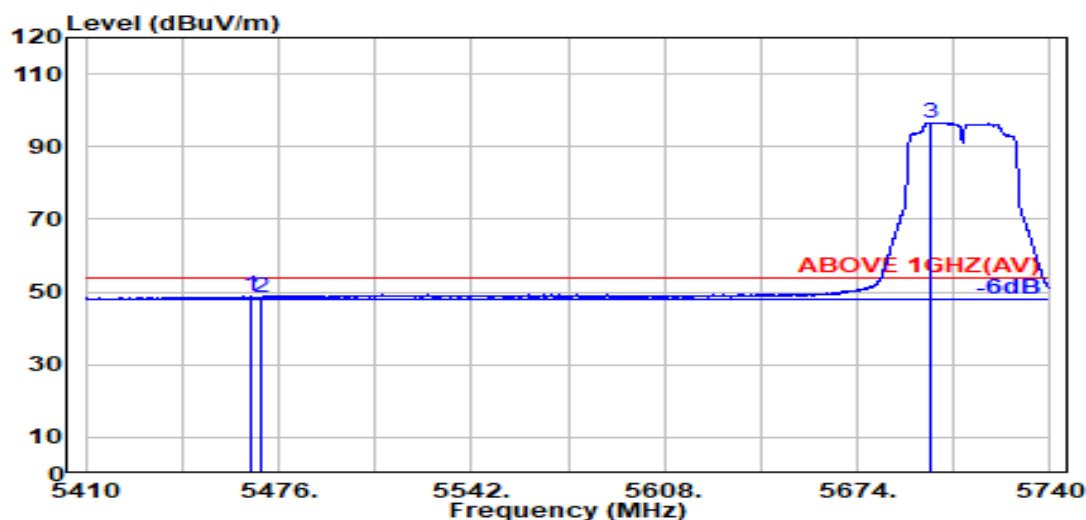

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.17	8.73	34.18	40.04	48.76	54.00	5.24	Average
5470.000	34.16	8.74	34.18	39.71	48.43	54.00	5.57	Average
@ 5699.100	33.80	8.87	34.26	88.17	96.57	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

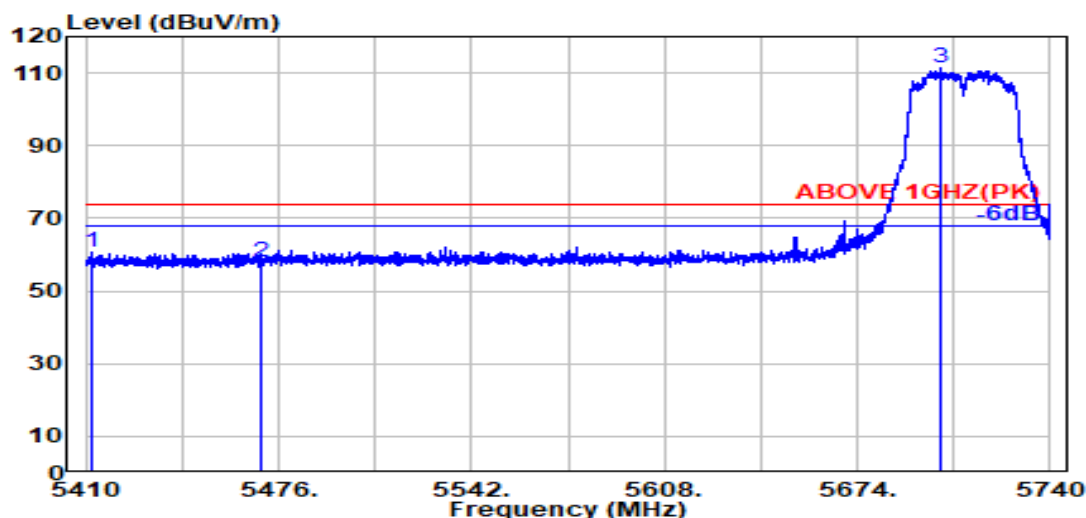

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.200	34.12	8.70	34.20	52.16	60.79	74.00	13.21	Peak
5470.000	34.16	8.74	34.18	49.02	57.74	74.00	16.26	Peak
@ 5702.600	33.80	8.87	34.27	102.86	111.27	---	---	Peak

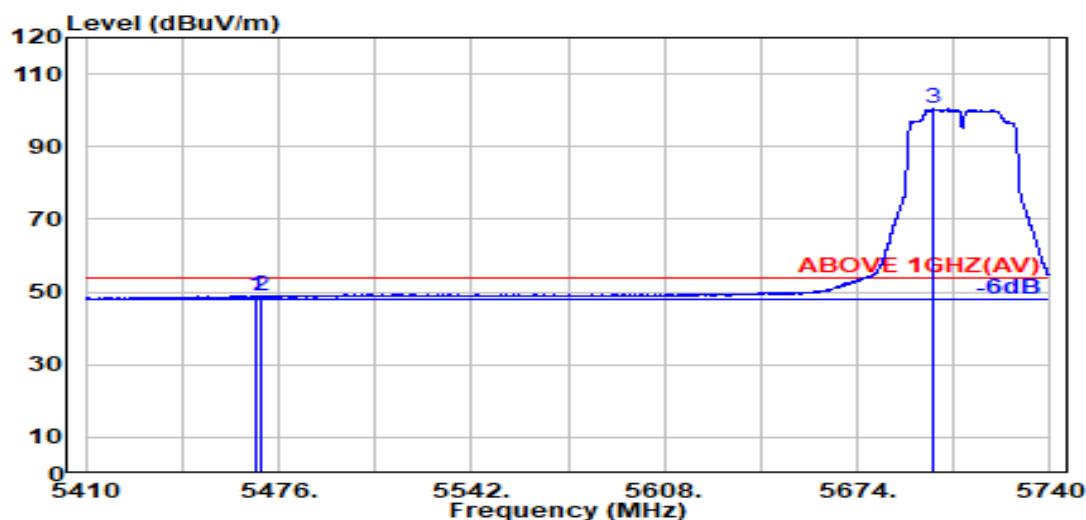

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.16	8.73	34.18	40.18	48.90	54.00	5.10	Average
5470.000	34.16	8.74	34.18	39.99	48.71	54.00	5.29	Average
@ 5700.000	33.80	8.87	34.26	91.94	100.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

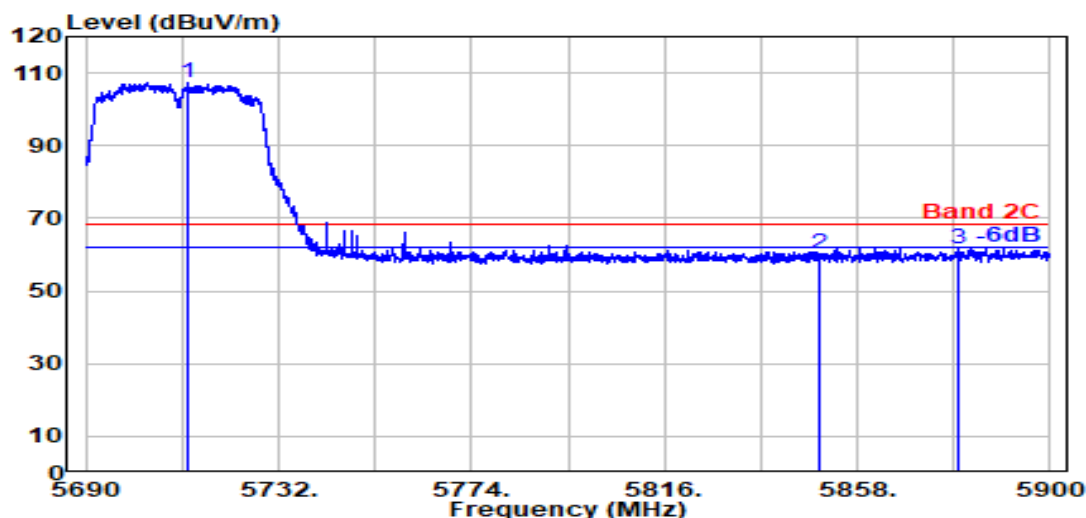

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.200	33.80	8.87	34.27	98.85	107.25	---	---	Peak
5850.000	34.10	8.95	34.33	51.39	60.11	68.20	8.09	Peak
5880.000	34.10	8.97	34.35	53.09	61.81	68.20	6.39	Peak

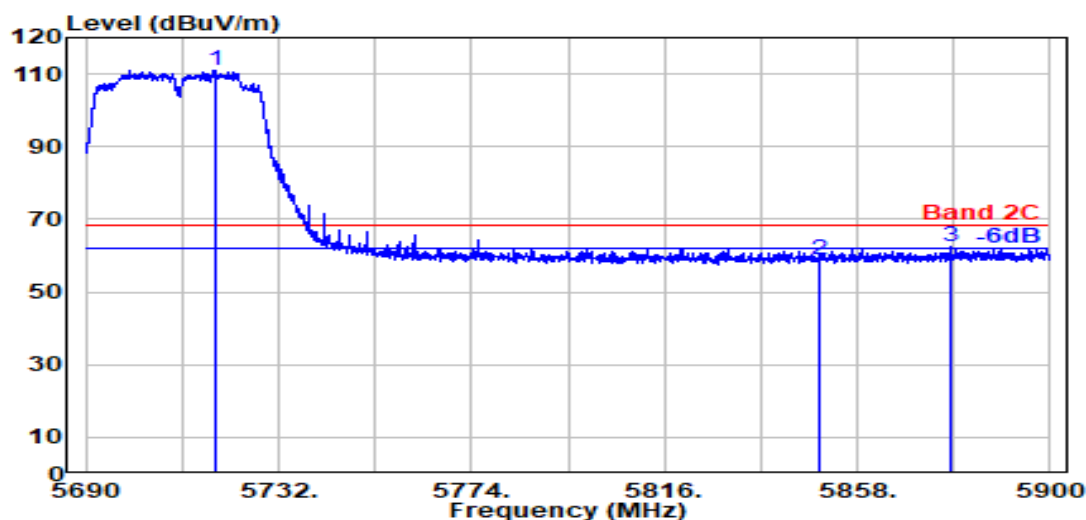

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.200	33.80	8.88	34.27	102.76	111.17	---	---	Peak
5850.000	34.10	8.95	34.33	50.18	58.90	68.20	9.30	Peak
5878.200	34.10	8.96	34.35	53.71	62.43	68.20	5.77	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

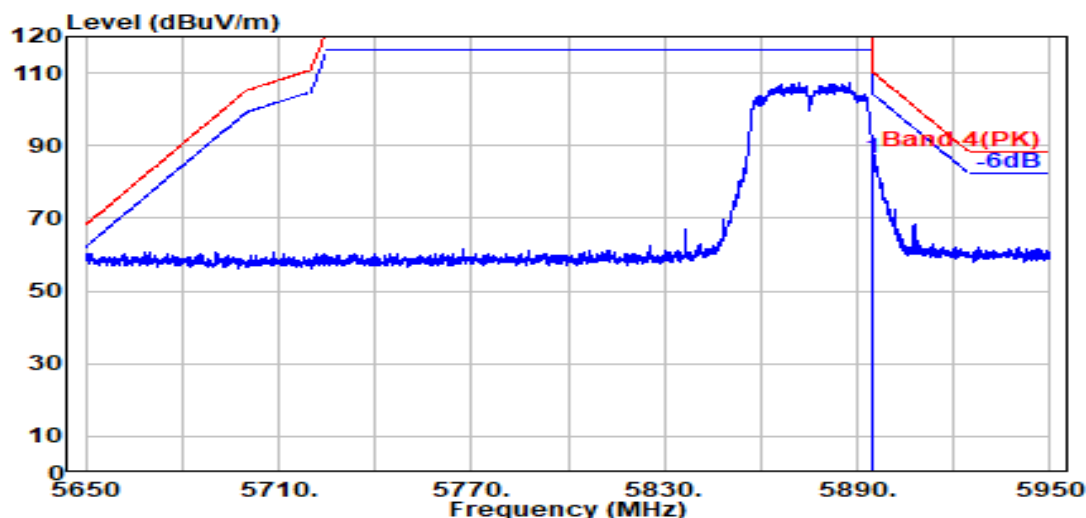

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	77.75	86.47	110.20	23.73	Peak

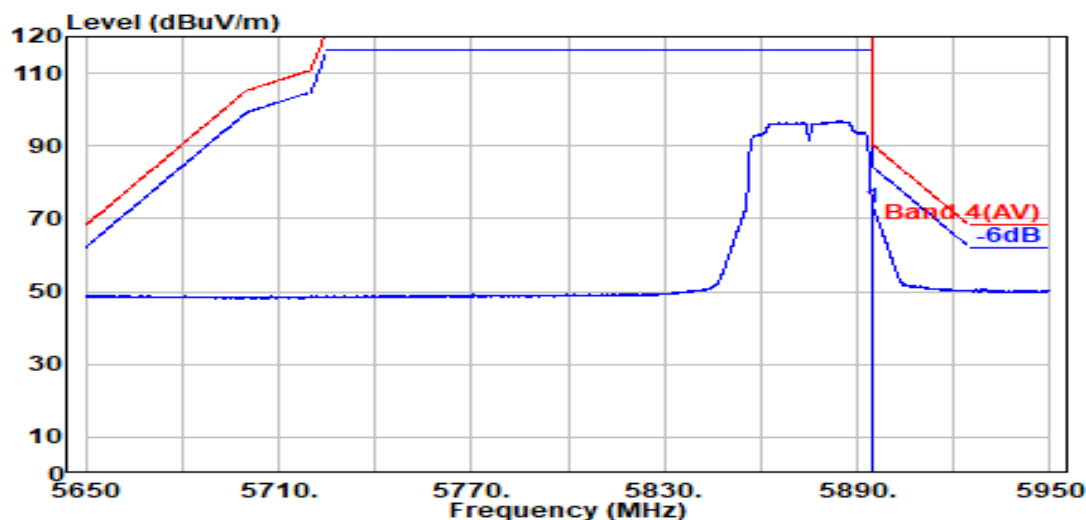

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	64.31	73.03	90.20	17.17	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

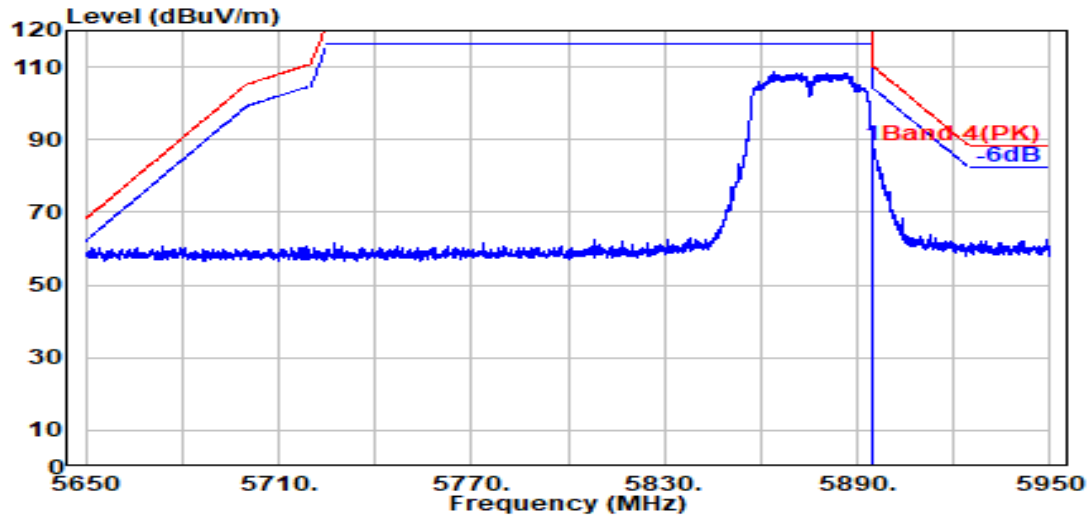

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.10	8.97	34.35	79.72	88.44	110.20	21.76	Peak

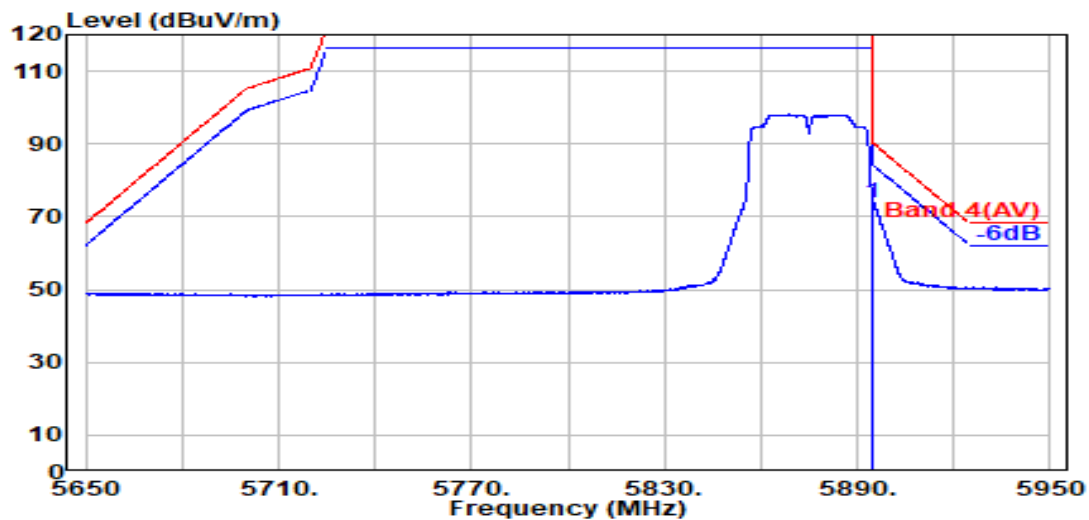

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.10	8.97	34.35	65.11	73.83	90.20	16.37	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

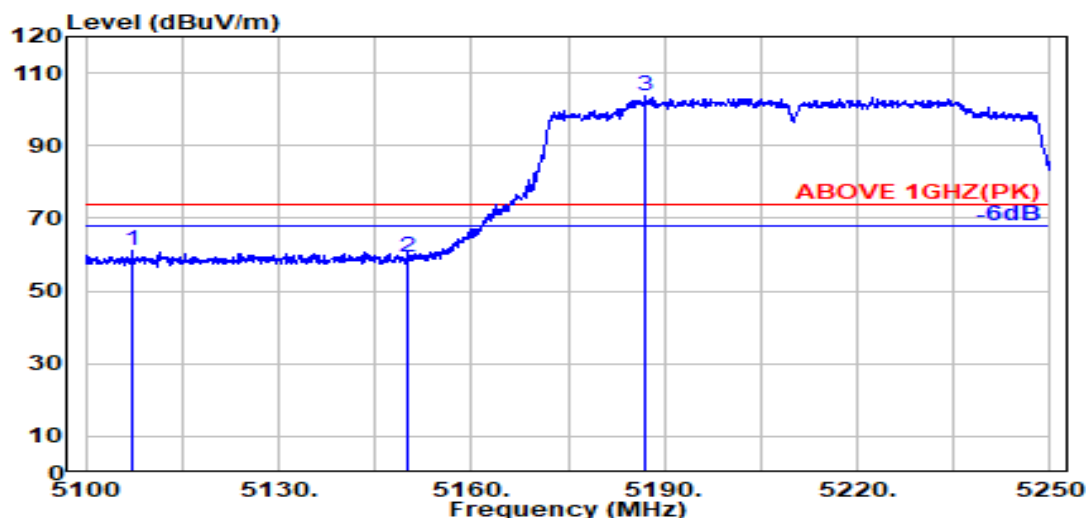

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.300	33.70	8.52	34.29	53.17	61.10	74.00	12.90	Peak
5150.000	33.70	8.54	34.28	51.32	59.28	74.00	14.72	Peak
@ 5187.000	33.70	8.57	34.27	95.48	103.48	---	---	Peak

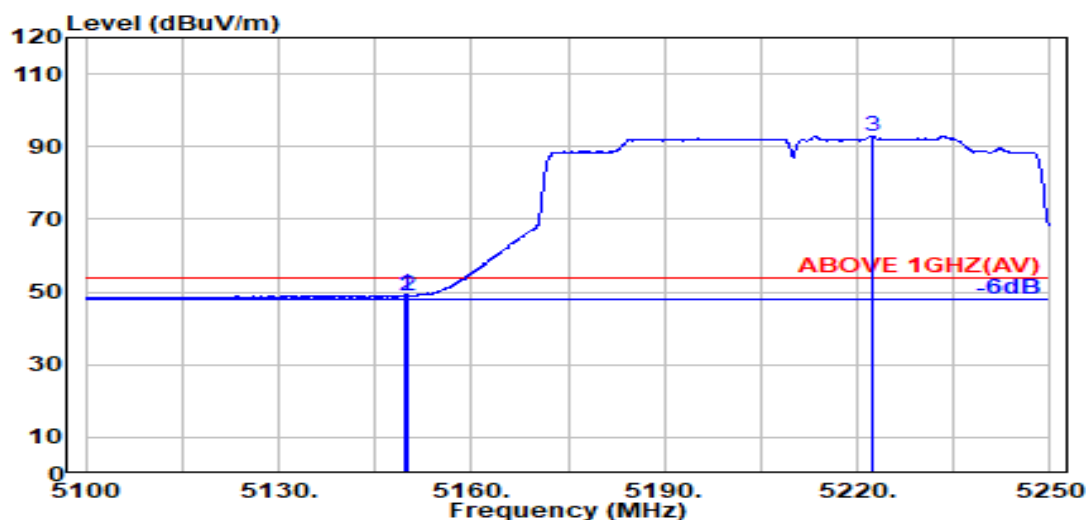

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.28	41.24	49.20	54.00	4.80	Average
5150.000	33.70	8.54	34.28	41.03	49.00	54.00	5.00	Average
@ 5222.400	33.74	8.59	34.26	84.93	93.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

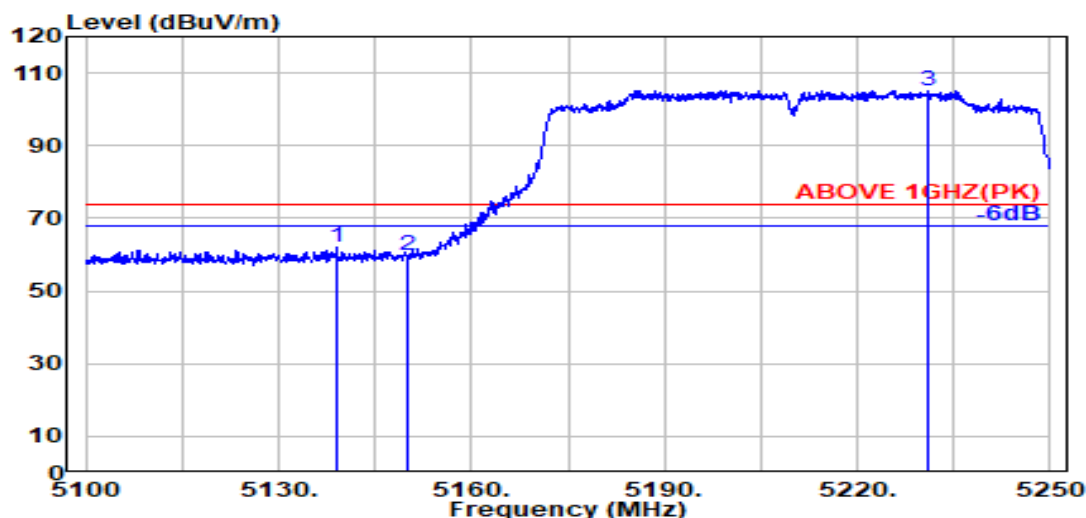

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.100	33.70	8.54	34.28	54.20	62.15	74.00	11.85	Peak
5150.000	33.70	8.54	34.28	51.85	59.81	74.00	14.19	Peak
@ 5231.000	33.76	8.59	34.25	97.10	105.20	---	---	Peak

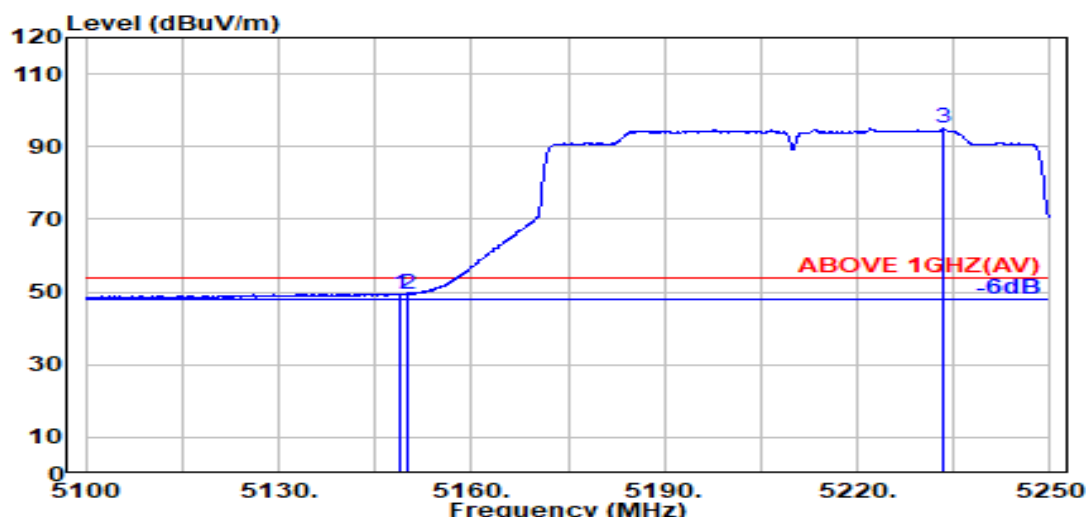

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.54	34.28	41.50	49.46	54.00	4.54	Average
5150.000	33.70	8.54	34.28	41.57	49.54	54.00	4.46	Average
@ 5233.400	33.77	8.60	34.25	86.78	94.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

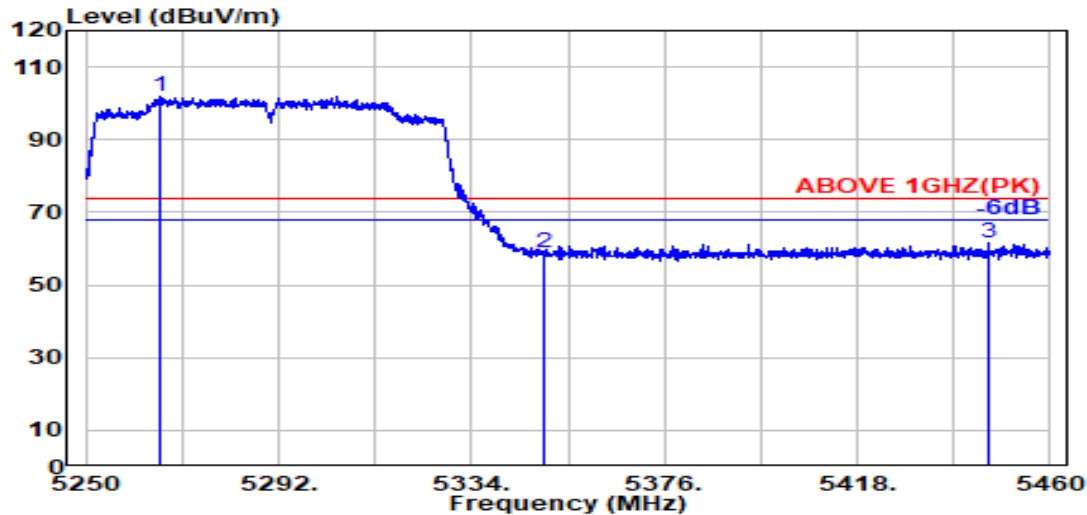

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.400	33.90	8.62	34.24	93.57	101.84	---	---	Peak
5350.000	33.90	8.67	34.22	50.41	58.75	74.00	15.25	Peak
5446.600	34.19	8.72	34.19	53.05	61.78	74.00	12.22	Peak

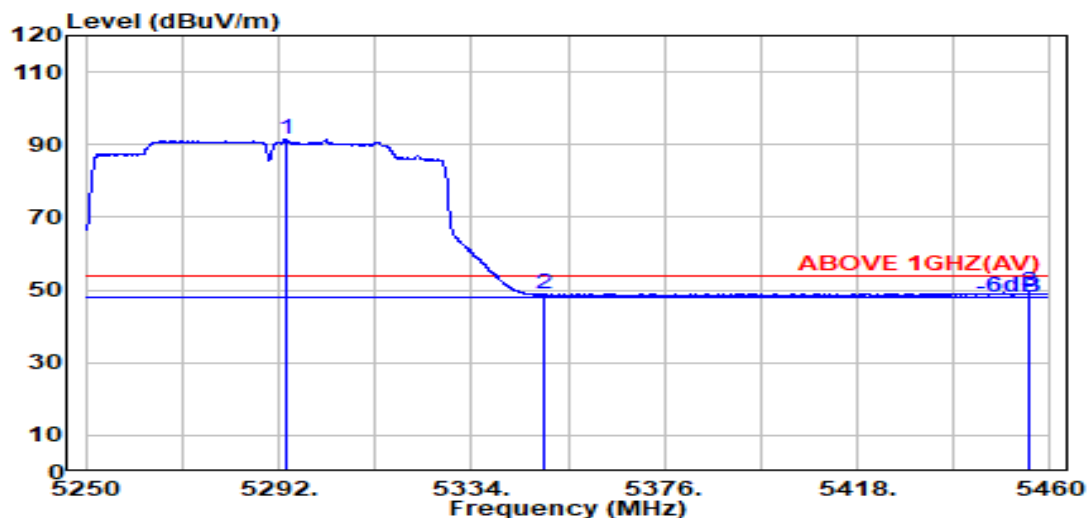

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.500	34.06	8.63	34.23	82.86	91.32	---	---	Average
5350.000	33.90	8.67	34.22	40.52	48.87	54.00	5.13	Average
5455.600	34.19	8.73	34.18	40.41	49.14	54.00	4.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

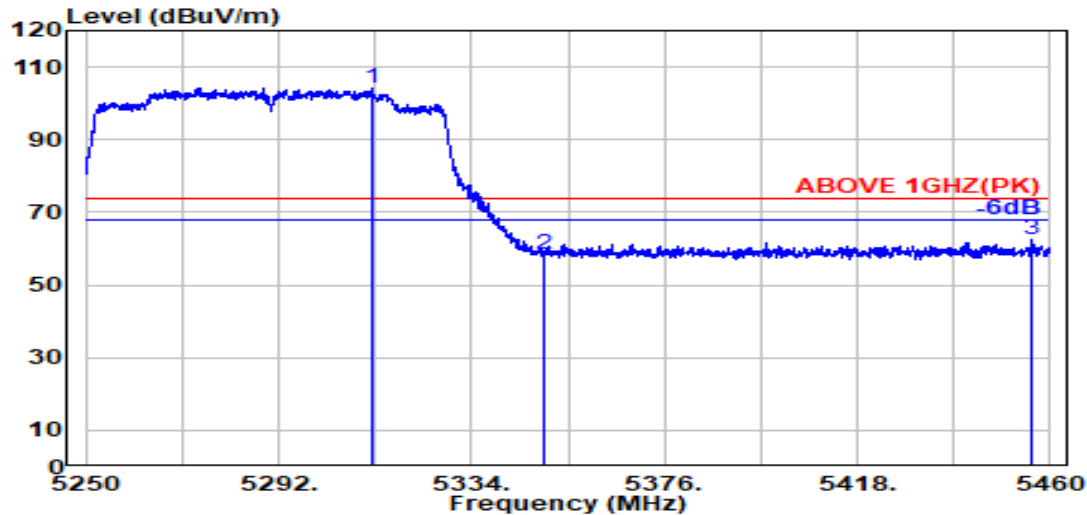

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.200	34.05	8.64	34.23	95.55	104.01	---	---	Peak
5350.000	33.90	8.67	34.22	50.29	58.64	74.00	15.36	Peak
5455.900	34.19	8.73	34.18	53.86	62.59	74.00	11.41	Peak

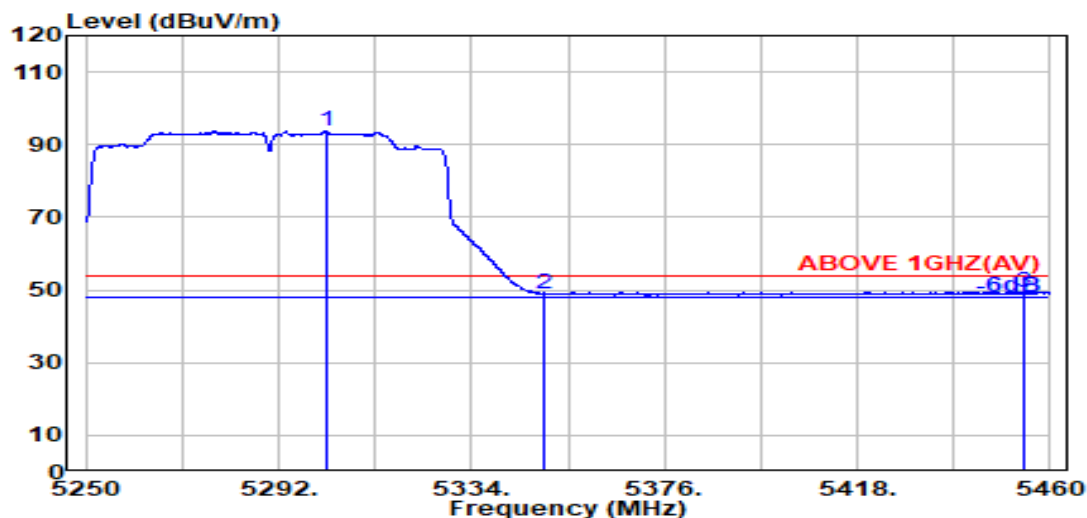

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.300	34.09	8.64	34.23	85.15	93.64	---	---	Average
5350.000	33.90	8.67	34.22	40.66	49.01	54.00	4.99	Average
5454.100	34.19	8.73	34.18	40.72	49.45	54.00	4.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

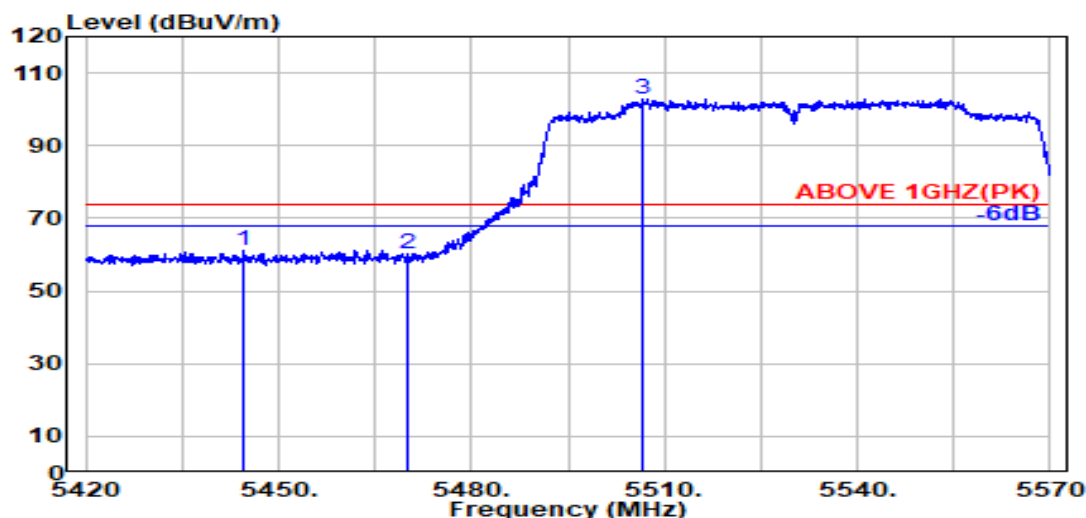

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.500	34.19	8.72	34.19	52.48	61.20	74.00	12.80	Peak
5470.000	34.16	8.74	34.18	51.32	60.04	74.00	13.96	Peak
@ 5506.600	34.10	8.76	34.17	94.30	102.99	---	---	Peak

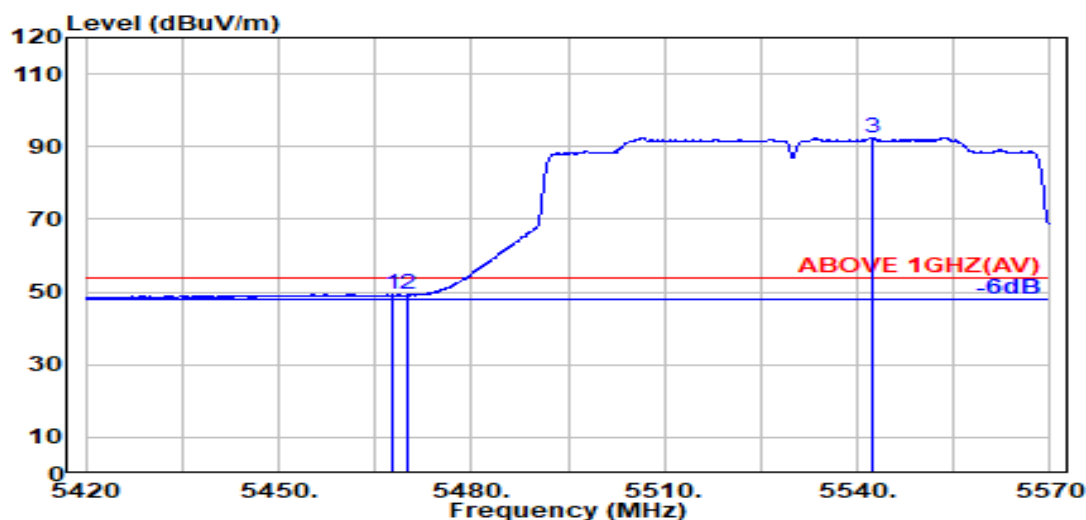

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.16	8.73	34.18	40.55	49.27	54.00	4.73	Average
5470.000	34.16	8.74	34.18	40.43	49.15	54.00	4.85	Average
@ 5542.300	34.10	8.78	34.19	83.84	92.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

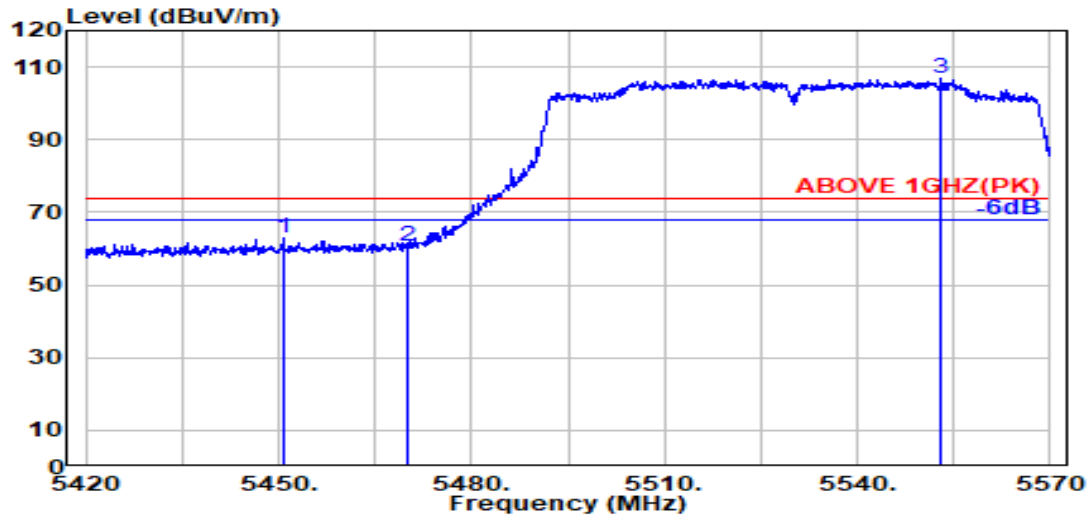

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.800	34.20	8.72	34.19	54.02	62.75	74.00	11.25	Peak
5470.000	34.16	8.74	34.18	51.91	60.63	74.00	13.37	Peak
@ 5553.100	34.09	8.78	34.20	98.11	106.79	---	---	Peak

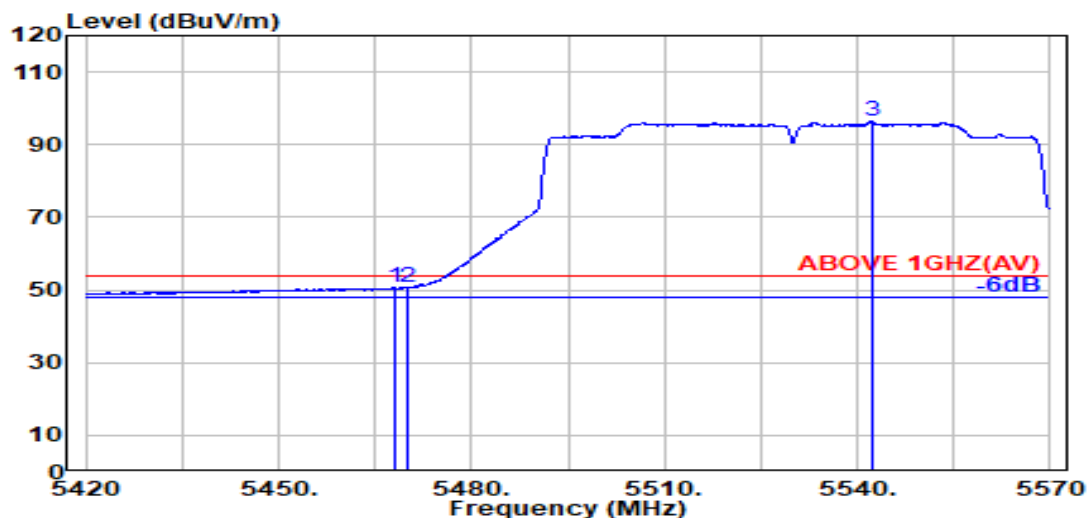

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	41.80	50.52	54.00	3.48	Average
5470.000	34.16	8.74	34.18	41.81	50.53	54.00	3.47	Average
@ 5542.200	34.10	8.78	34.19	87.61	96.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

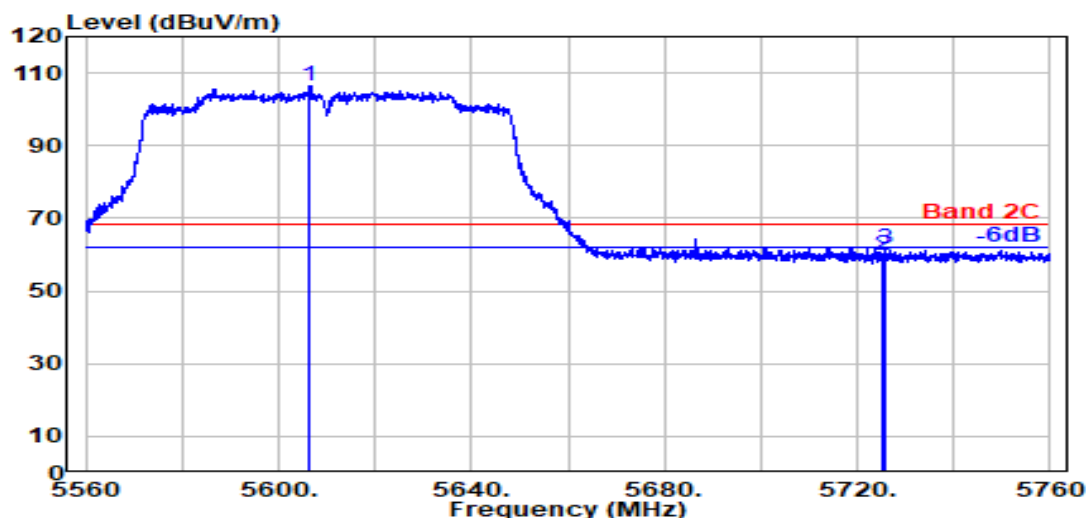

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.500	34.00	8.81	34.22	97.67	106.27	---	---	Peak
5725.000	33.80	8.88	34.28	51.55	59.96	68.20	8.24	Peak
5726.000	33.80	8.88	34.28	53.28	61.68	68.20	6.52	Peak

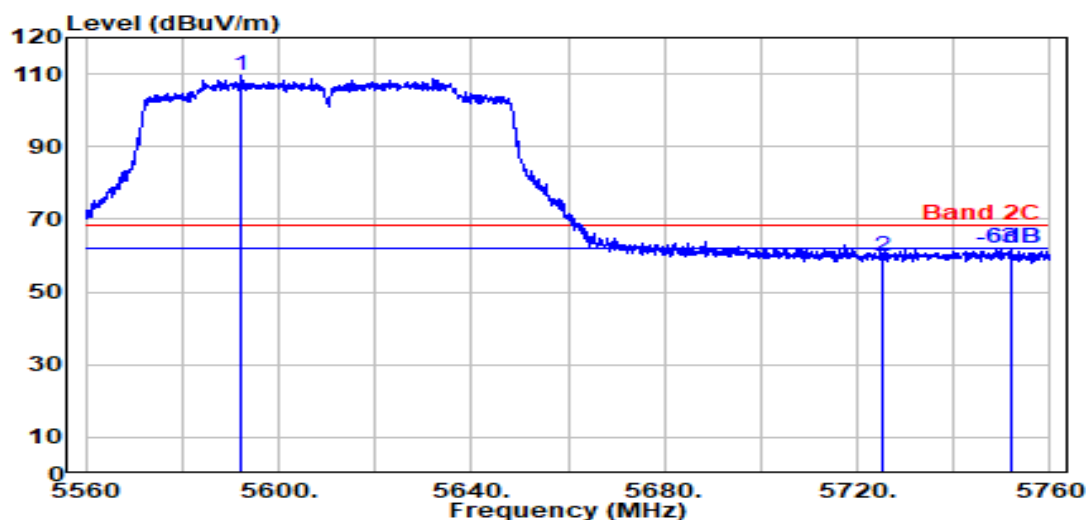

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.400	34.02	8.81	34.21	101.02	109.63	---	---	Peak
5725.000	33.80	8.88	34.28	51.31	59.72	68.20	8.48	Peak
5751.700	33.81	8.90	34.29	53.44	61.85	68.20	6.35	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

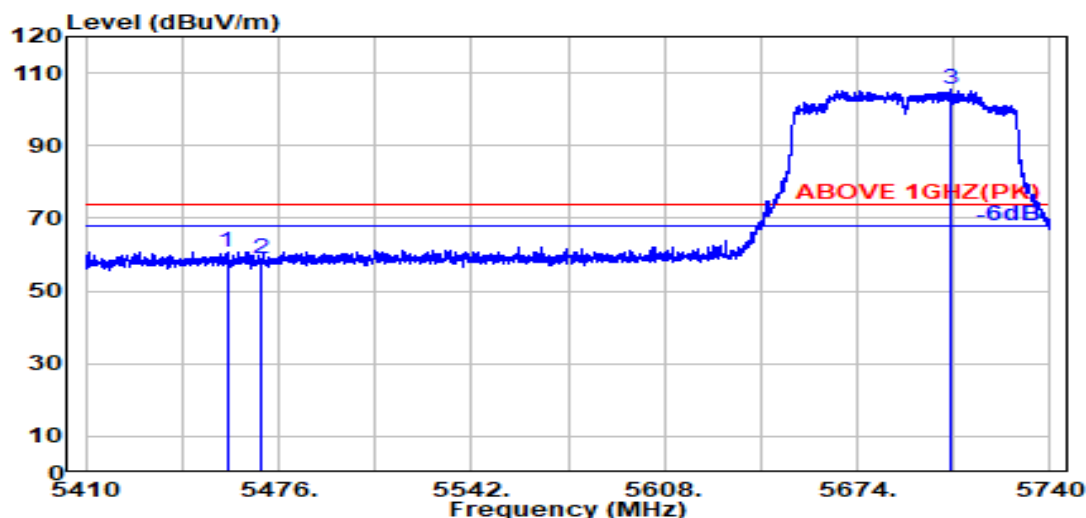

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.300	34.18	8.73	34.18	52.07	60.80	74.00	13.20	Peak
5470.000	34.16	8.74	34.18	50.03	58.75	74.00	15.25	Peak
@ 5705.700	33.80	8.87	34.27	97.04	105.44	---	---	Peak

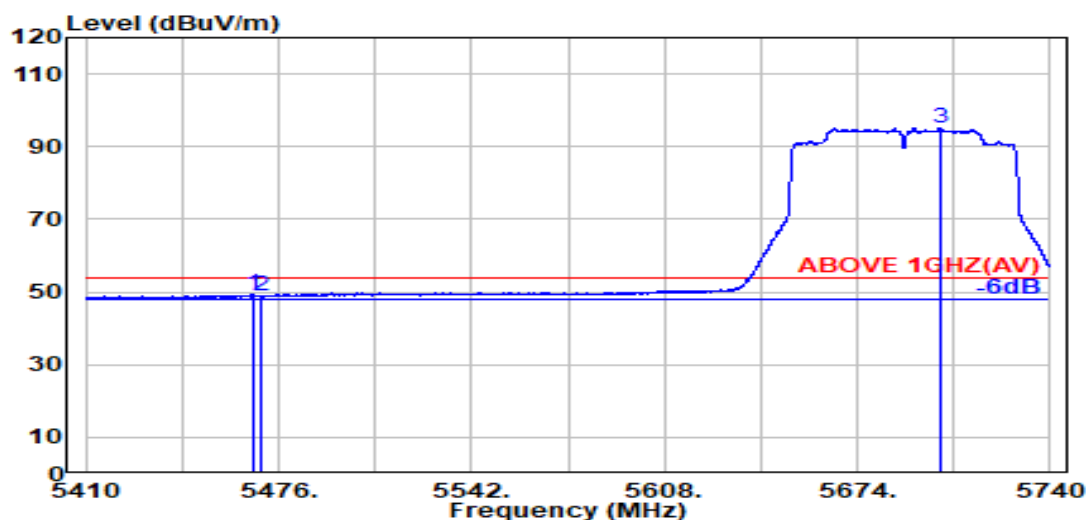

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.16	8.73	34.18	40.47	49.19	54.00	4.81	Average
5470.000	34.16	8.74	34.18	40.00	48.71	54.00	5.29	Average
@ 5702.500	33.80	8.87	34.27	86.61	95.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

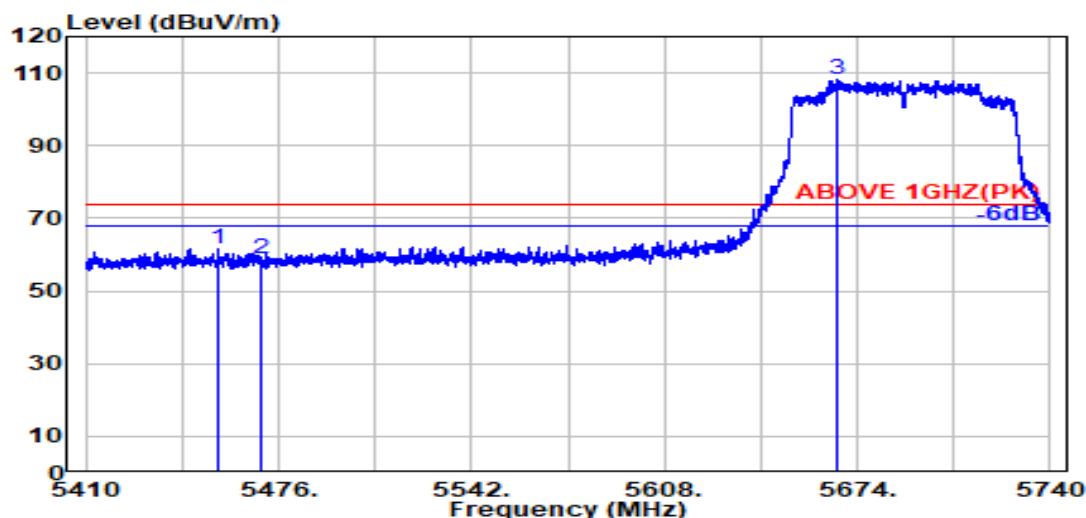

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.500	34.19	8.73	34.18	52.86	61.60	74.00	12.40	Peak
5470.000	34.16	8.74	34.18	50.07	58.79	74.00	15.21	Peak
@ 5666.700	33.93	8.85	34.25	99.60	108.13	---	---	Peak

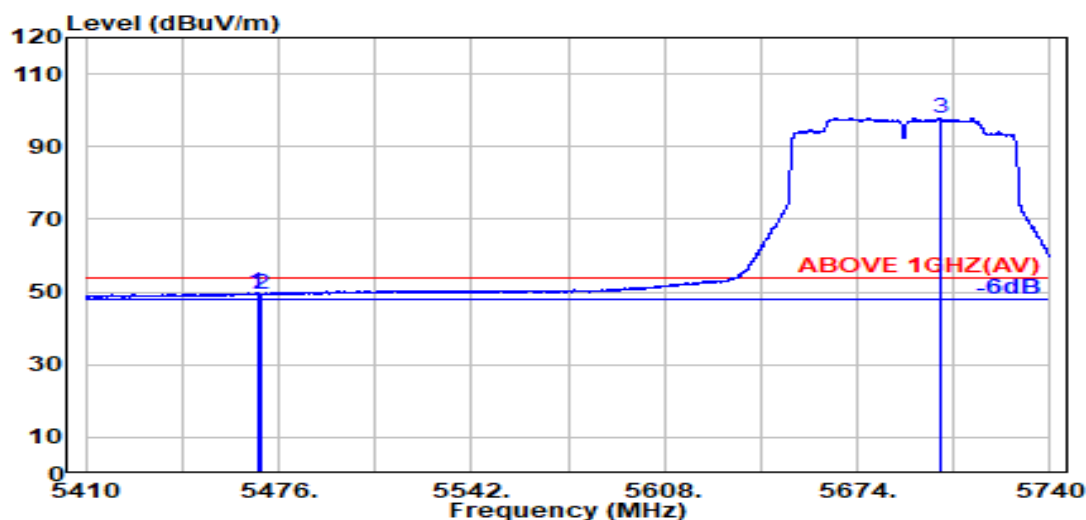

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	40.91	49.63	54.00	4.37	Average
5470.000	34.16	8.74	34.18	40.63	49.35	54.00	4.65	Average
@ 5702.200	33.80	8.87	34.27	89.61	98.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

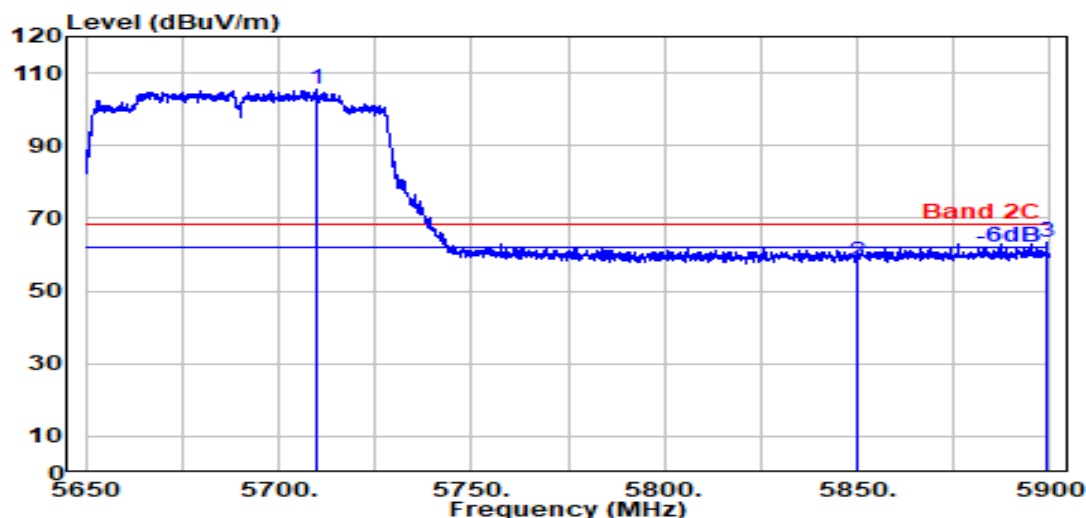

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5710.000	33.80	8.87	34.27	97.09	105.50	---	---	Peak
5850.000	34.10	8.95	34.33	49.18	57.90	68.20	10.30	Peak
5899.200	34.10	8.98	34.36	54.83	63.56	68.20	4.64	Peak

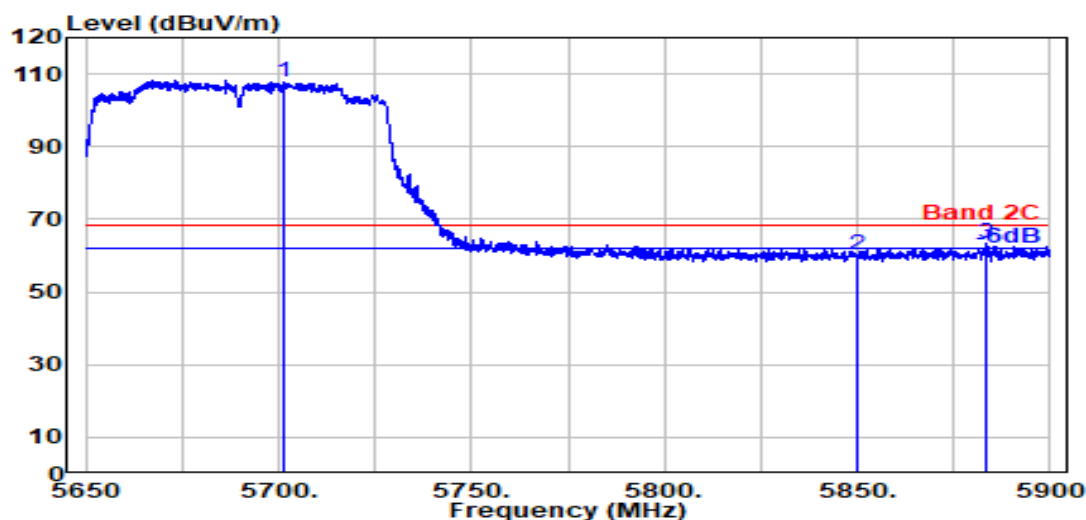

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.100	33.80	8.87	34.26	99.43	107.83	---	---	Peak
5850.000	34.10	8.95	34.33	51.67	60.39	68.20	7.81	Peak
5883.700	34.10	8.97	34.35	54.52	63.24	68.20	4.96	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

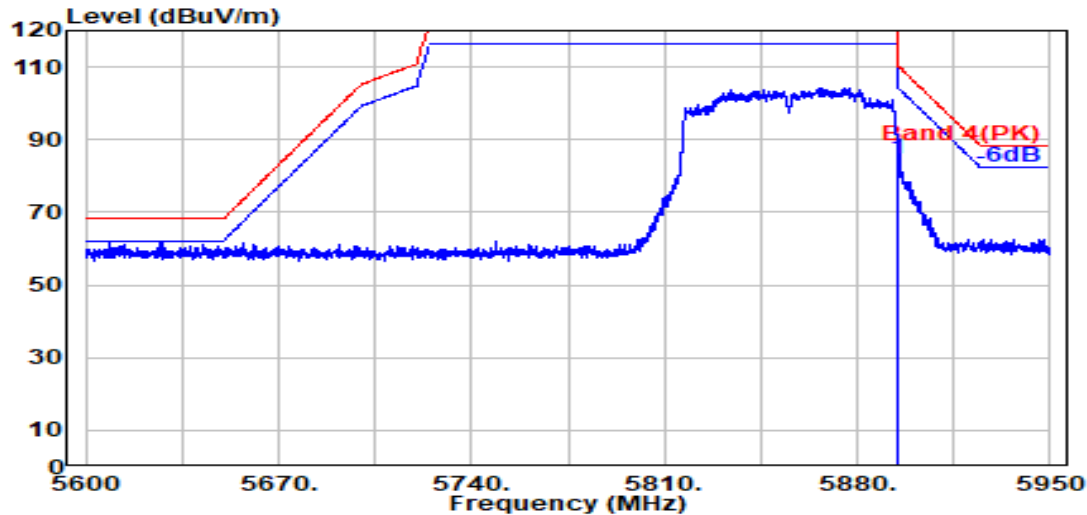

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	75.97	84.69	110.16	25.47	Peak

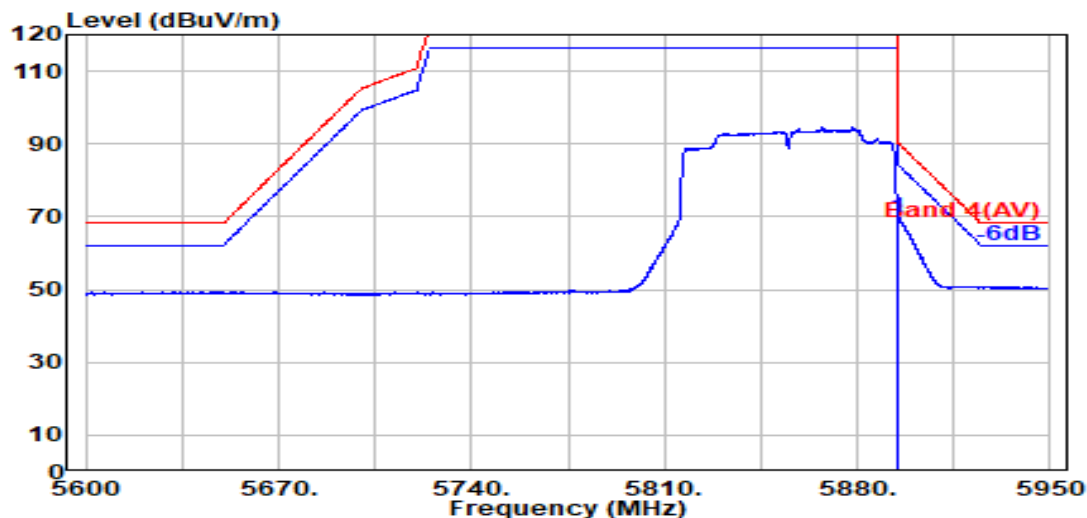

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	61.09	69.81	90.16	20.35	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

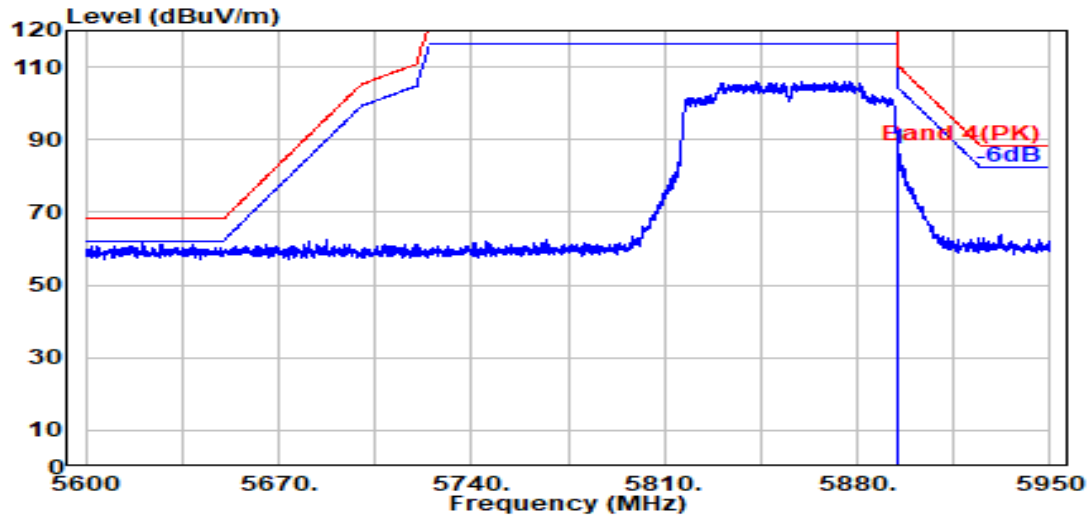

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	78.47	87.19	110.16	22.98	Peak

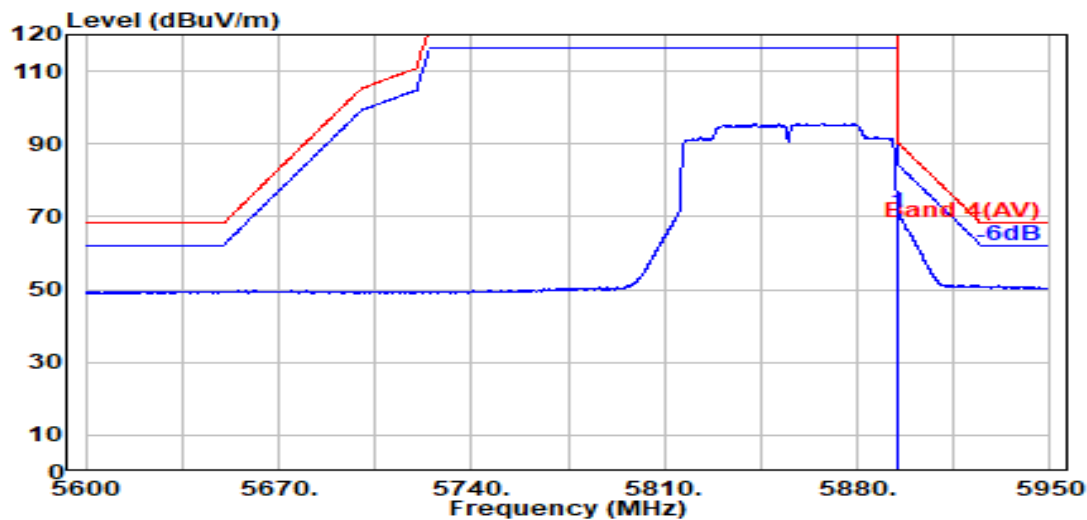

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	62.34	71.06	90.16	19.11	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

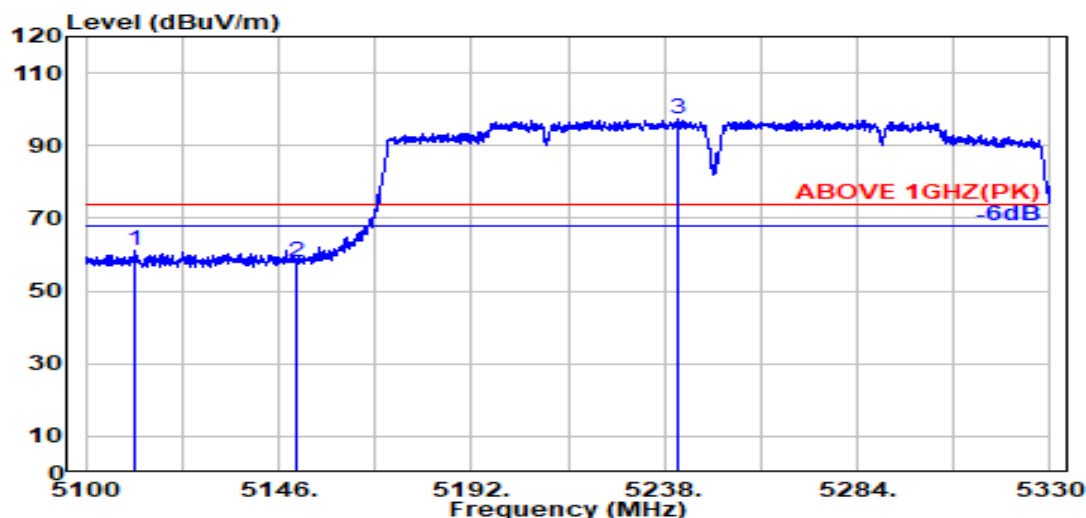

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.500	33.70	8.52	34.29	53.27	61.20	74.00	12.80	Peak
5150.000	33.70	8.54	34.28	49.81	57.77	74.00	16.23	Peak
@ 5241.400	33.78	8.60	34.25	89.23	97.37	---	---	Peak

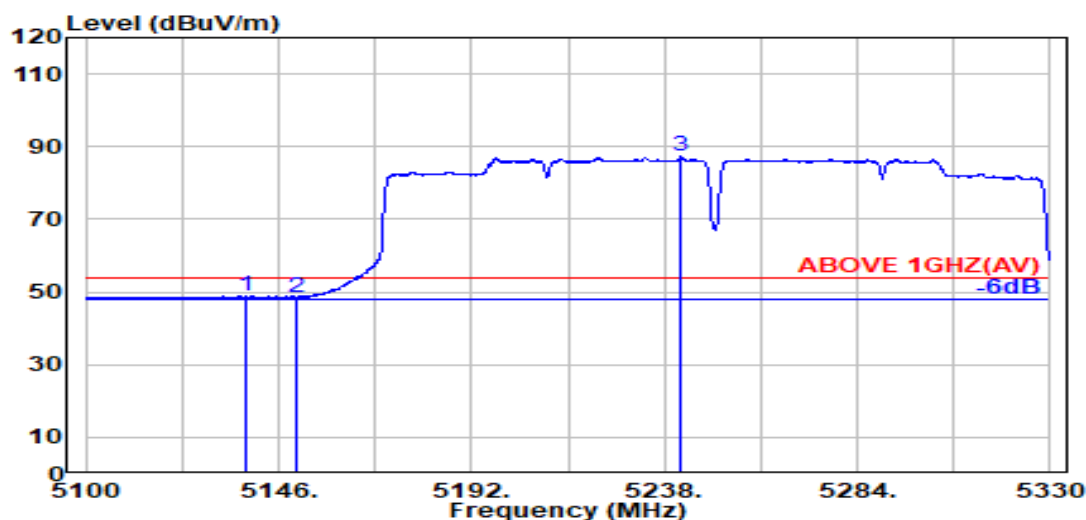

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.300	33.70	8.54	34.28	40.93	48.88	54.00	5.12	Average
5150.000	33.70	8.54	34.28	40.57	48.53	54.00	5.47	Average
@ 5242.100	33.78	8.60	34.25	79.06	87.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

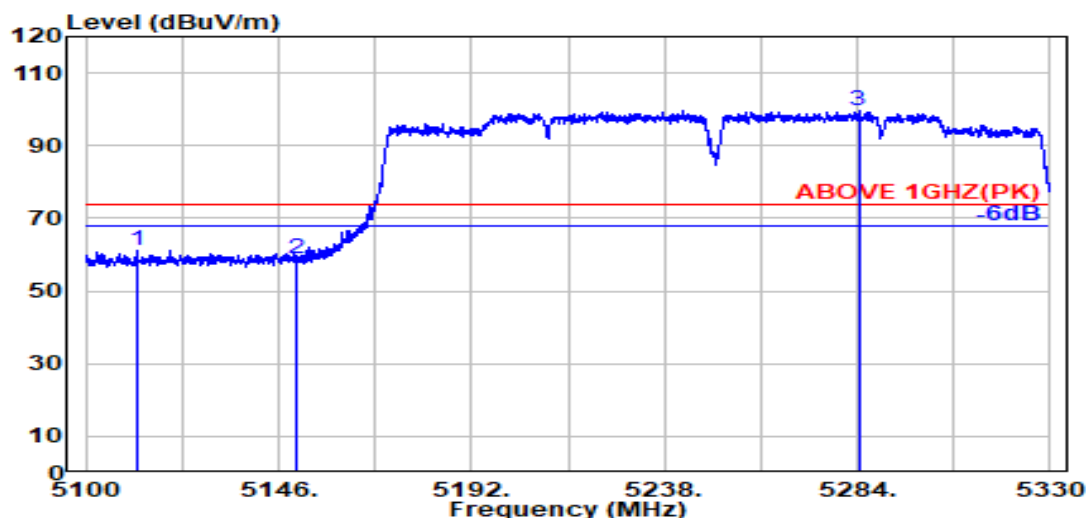

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.300	33.70	8.52	34.29	53.29	61.22	74.00	12.78	Peak
5150.000	33.70	8.54	34.28	50.72	58.68	74.00	15.32	Peak
@ 5284.300	34.01	8.63	34.24	91.09	99.48	---	---	Peak

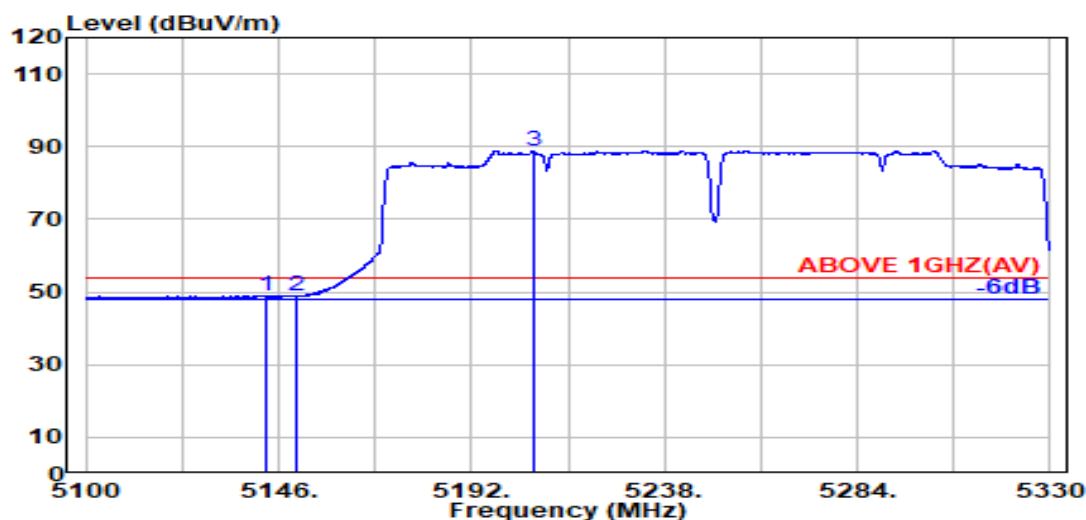

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.100	33.70	8.54	34.28	41.14	49.10	54.00	4.90	Average
5150.000	33.70	8.54	34.28	40.90	48.87	54.00	5.13	Average
@ 5206.600	33.71	8.58	34.26	80.89	88.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

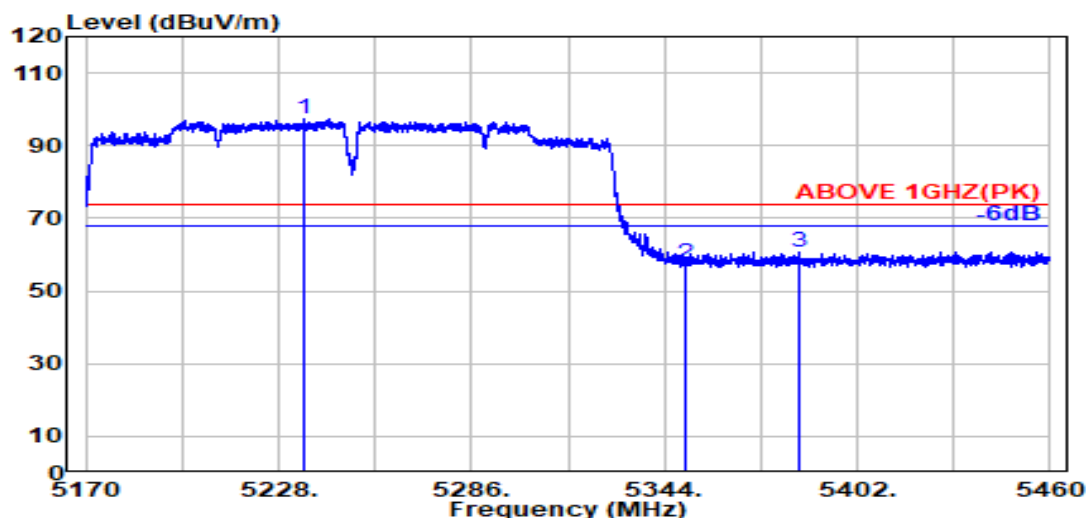

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5235.700	33.77	8.60	34.25	89.15	97.27	---	---	Peak
5350.000	33.90	8.67	34.22	49.01	57.36	74.00	16.64	Peak
5384.500	34.04	8.69	34.21	52.20	60.72	74.00	13.28	Peak

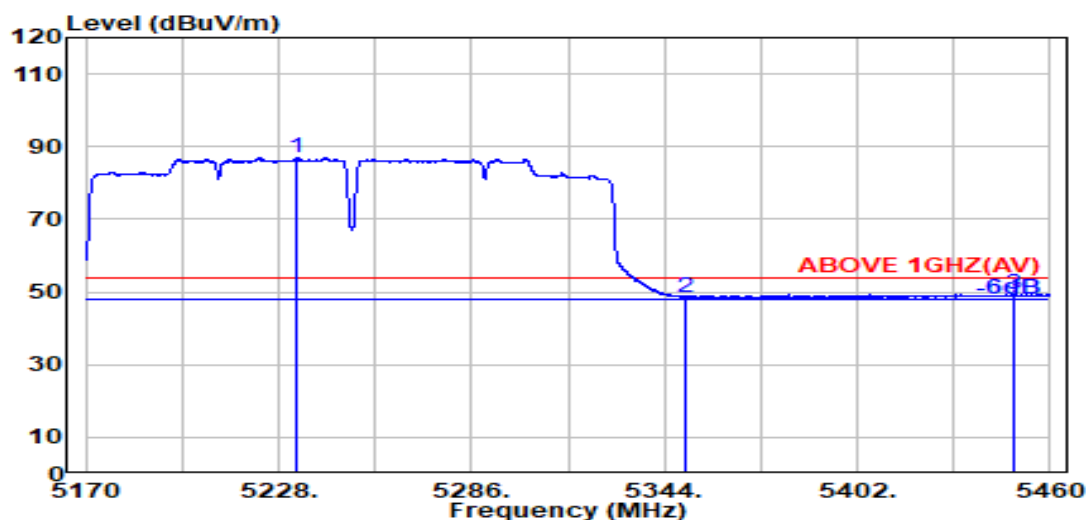

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5233.300	33.77	8.60	34.25	78.94	87.05	---	---	Average
5350.000	33.90	8.67	34.22	40.26	48.60	54.00	5.40	Average
5449.100	34.20	8.72	34.19	40.56	49.30	54.00	4.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

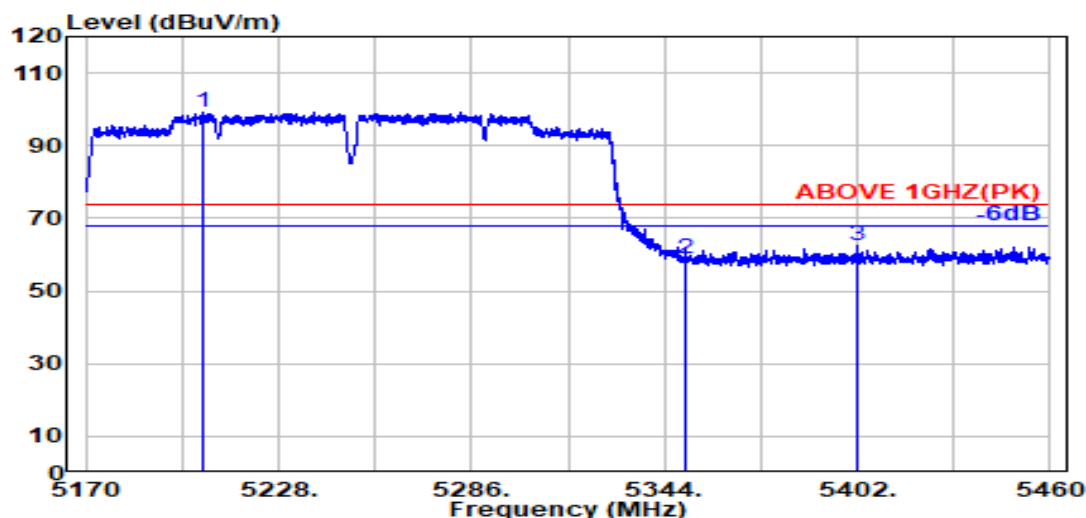

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5205.000	33.71	8.58	34.26	91.06	99.09	---	---	Peak
5350.000	33.90	8.67	34.22	50.47	58.81	74.00	15.19	Peak
5402.100	34.10	8.70	34.20	53.82	62.42	74.00	11.58	Peak

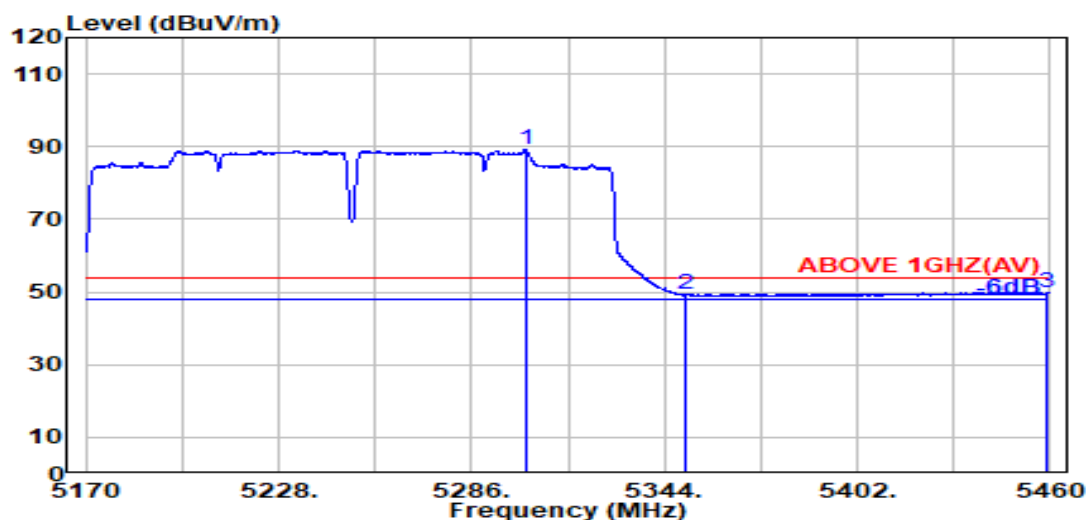


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.200	34.09	8.64	34.23	80.54	89.04	---	---	Average
5350.000	33.90	8.67	34.22	40.99	49.34	54.00	4.66	Average
5459.300	34.18	8.73	34.18	41.07	49.80	54.00	4.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

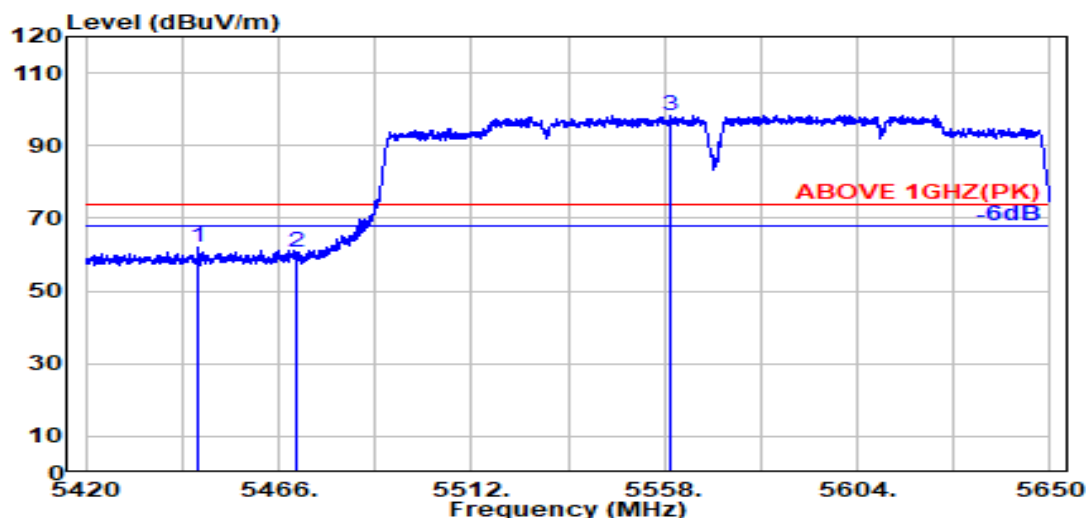

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.000	34.19	8.72	34.19	53.33	62.06	74.00	11.94	Peak
5470.000	34.16	8.74	34.18	51.74	60.45	74.00	13.55	Peak
@ 5559.300	34.08	8.79	34.20	89.78	98.45	---	---	Peak

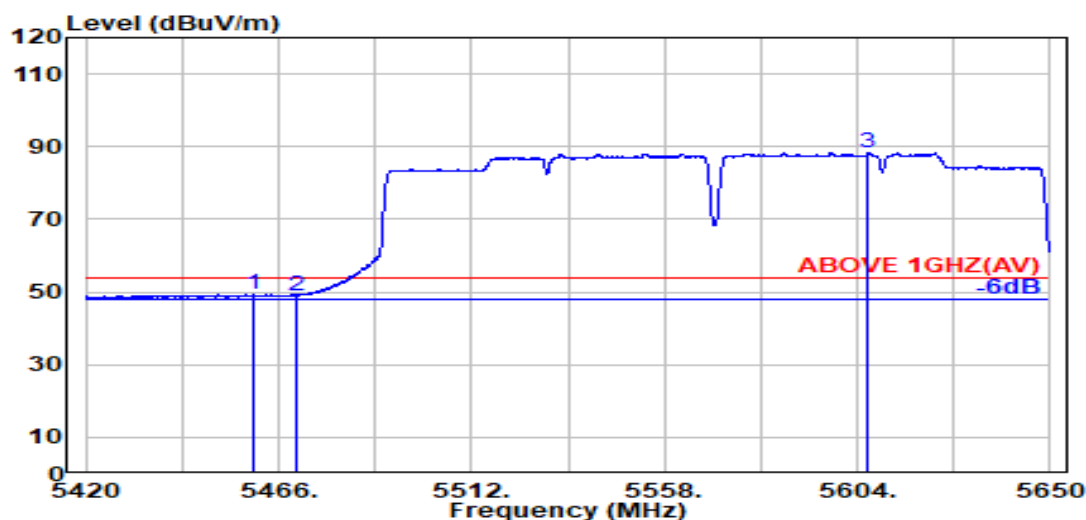

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.000	34.18	8.73	34.18	40.46	49.19	54.00	4.81	Average
5470.000	34.16	8.74	34.18	40.38	49.10	54.00	4.90	Average
@ 5606.600	34.00	8.81	34.22	79.59	88.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

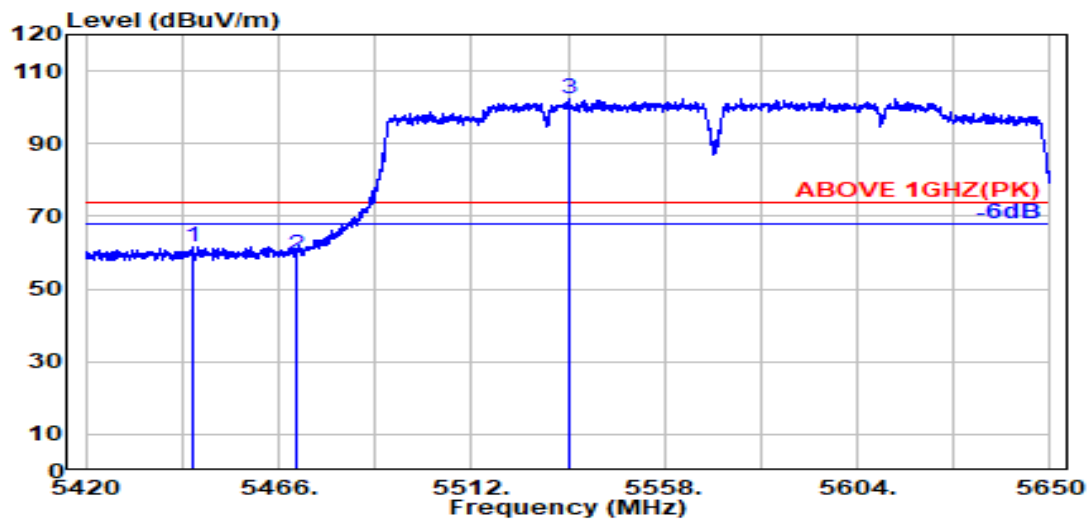

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.300	34.19	8.72	34.19	52.85	61.57	74.00	12.43	Peak
5470.000	34.16	8.74	34.18	50.80	59.52	74.00	14.48	Peak
@ 5535.500	34.10	8.77	34.19	93.74	102.42	---	---	Peak

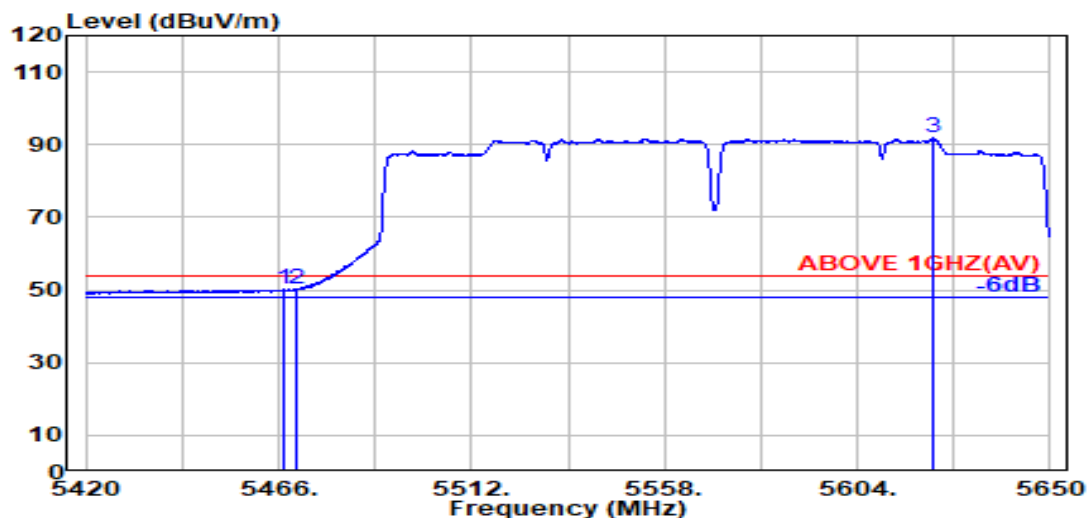

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	8.73	34.18	41.49	50.21	54.00	3.79	Average
5470.000	34.16	8.74	34.18	41.38	50.09	54.00	3.91	Average
@ 5622.100	34.00	8.82	34.23	83.30	91.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

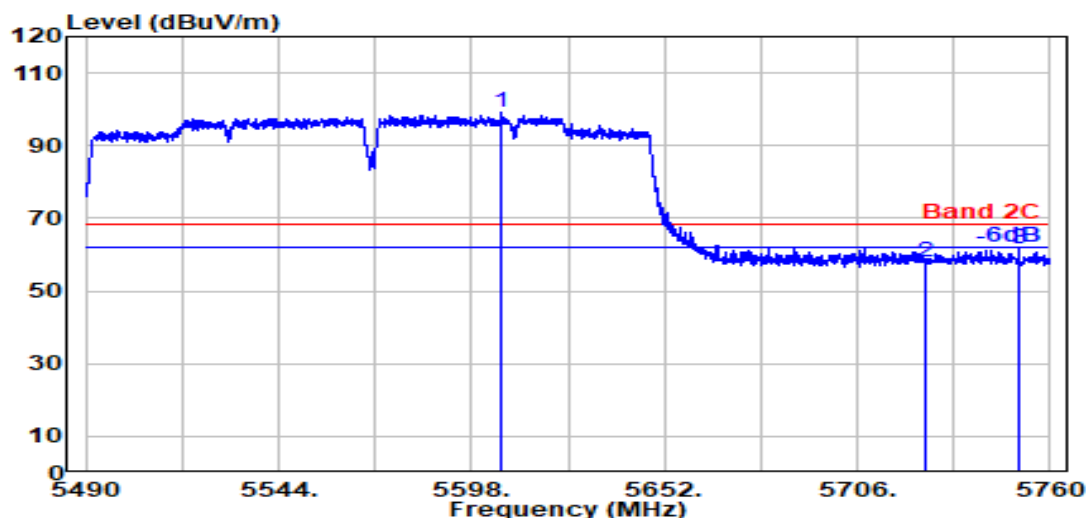

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.300	34.00	8.81	34.22	90.65	99.25	---	---	Peak
5725.000	33.80	8.88	34.28	49.67	58.07	68.20	10.13	Peak
5751.200	33.80	8.90	34.29	53.04	61.45	68.20	6.75	Peak

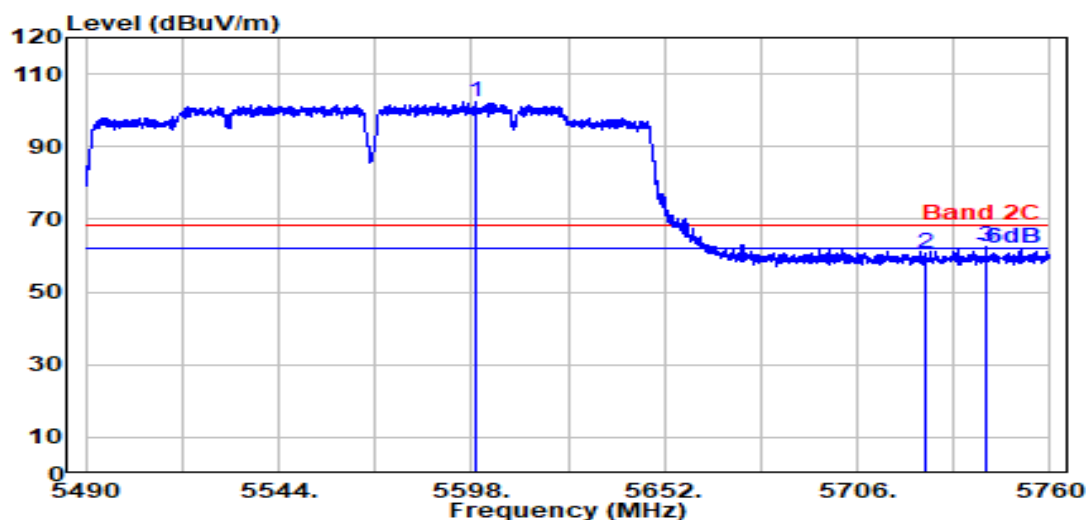

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5599.300	34.00	8.81	34.22	93.54	102.13	---	---	Peak
5725.000	33.80	8.88	34.28	52.19	60.60	68.20	7.60	Peak
5742.000	33.80	8.89	34.28	53.92	62.33	68.20	5.87	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

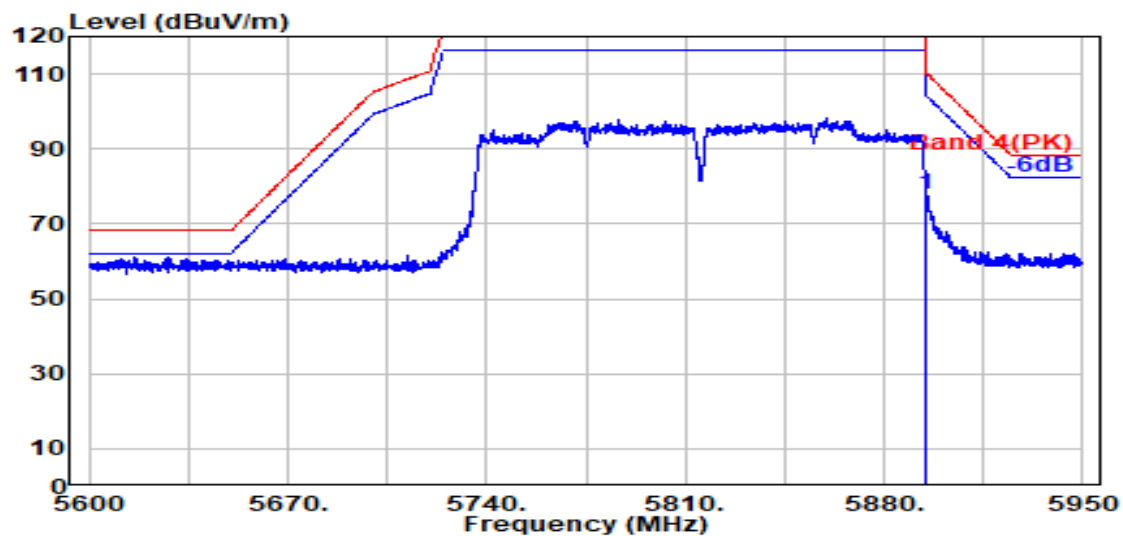

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	69.18	77.90	110.16	32.27	Peak

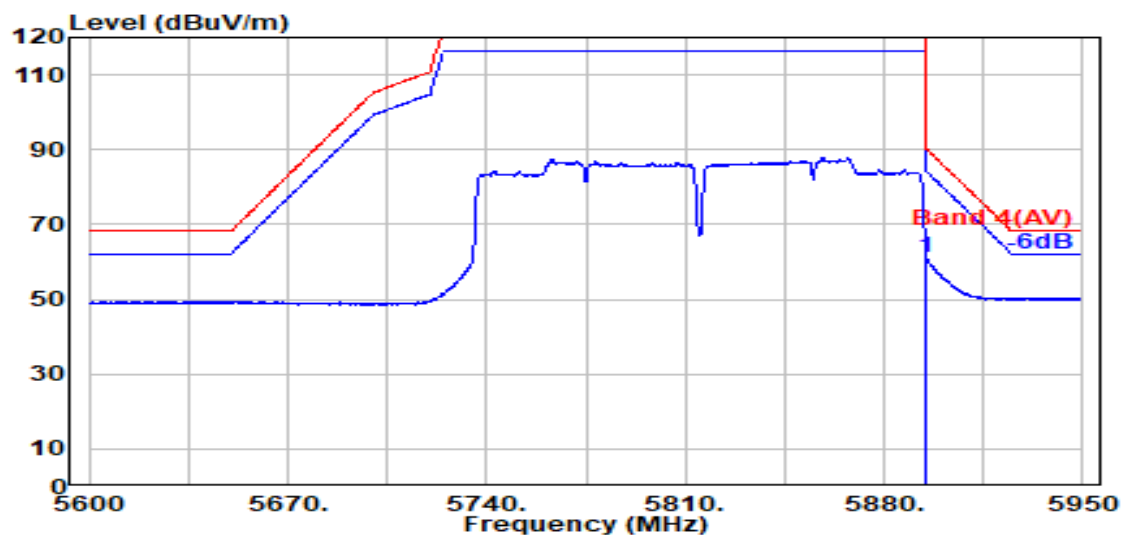

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	52.21	60.94	90.16	29.23	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

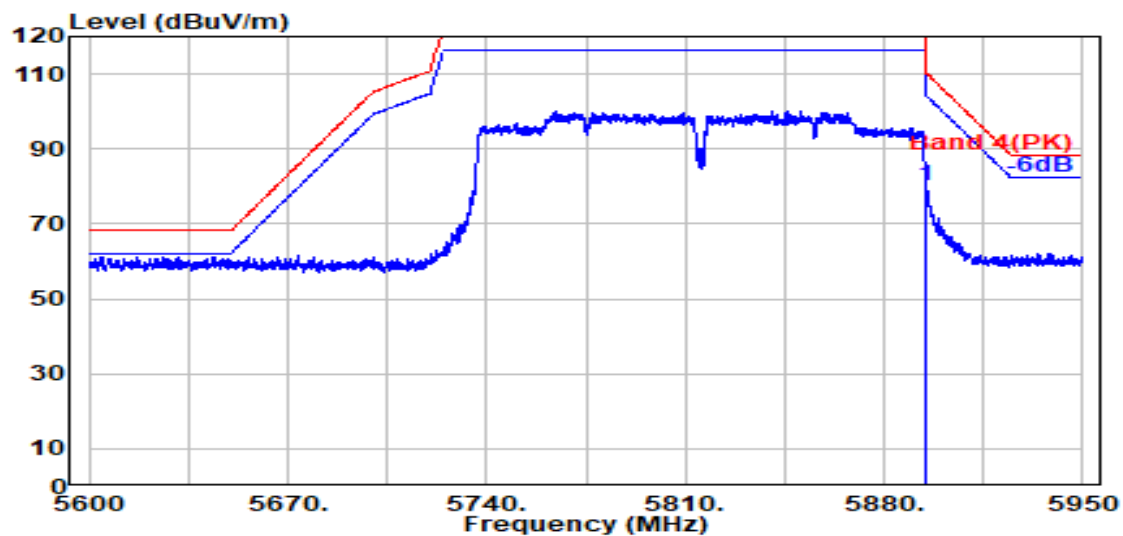

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	71.29	80.01	110.16	30.16	Peak

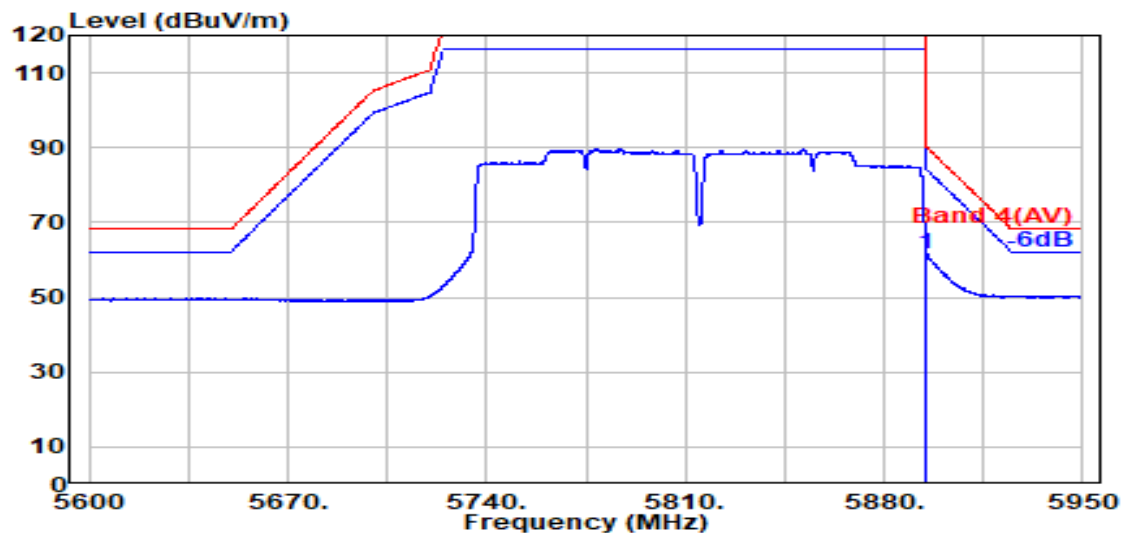

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	52.92	61.64	90.16	28.53	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

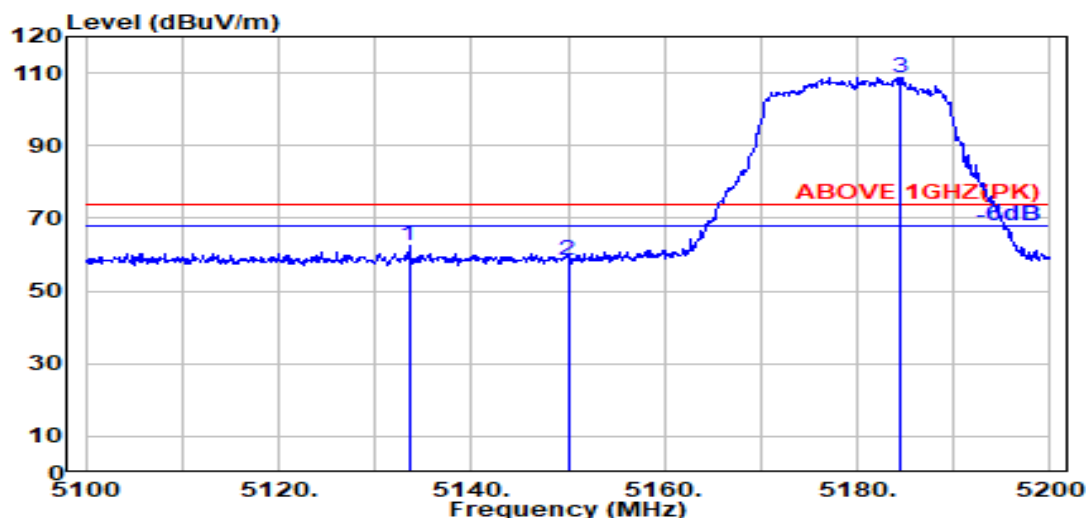

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.500	33.70	8.53	34.29	54.44	62.39	74.00	11.61	Peak
5150.000	33.70	8.54	34.28	50.44	58.40	74.00	15.60	Peak
@ 5184.400	33.70	8.57	34.27	100.90	108.90	---	---	Peak

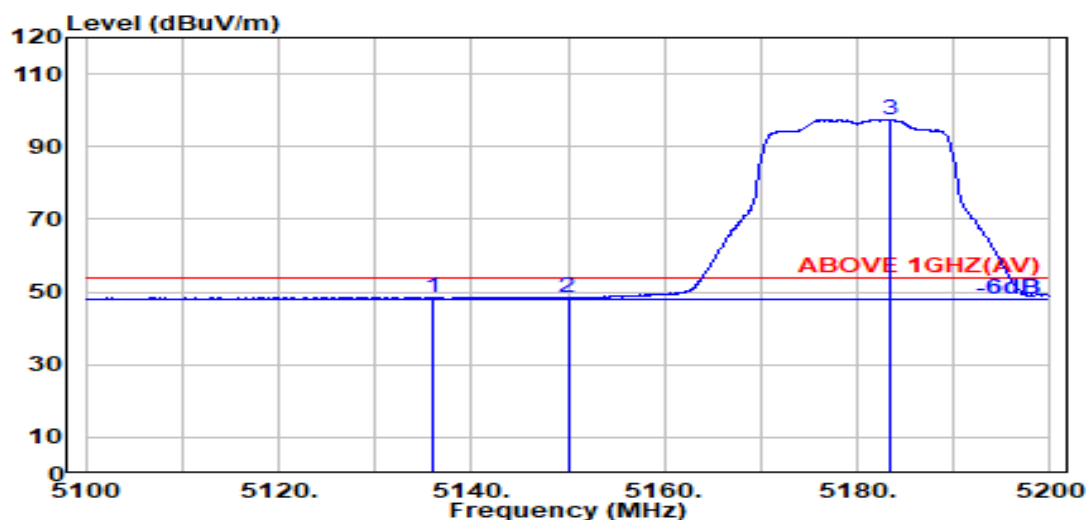

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.000	33.70	8.54	34.28	40.60	48.55	54.00	5.45	Average
5150.000	33.70	8.54	34.28	40.50	48.47	54.00	5.53	Average
@ 5183.300	33.70	8.56	34.27	89.45	97.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

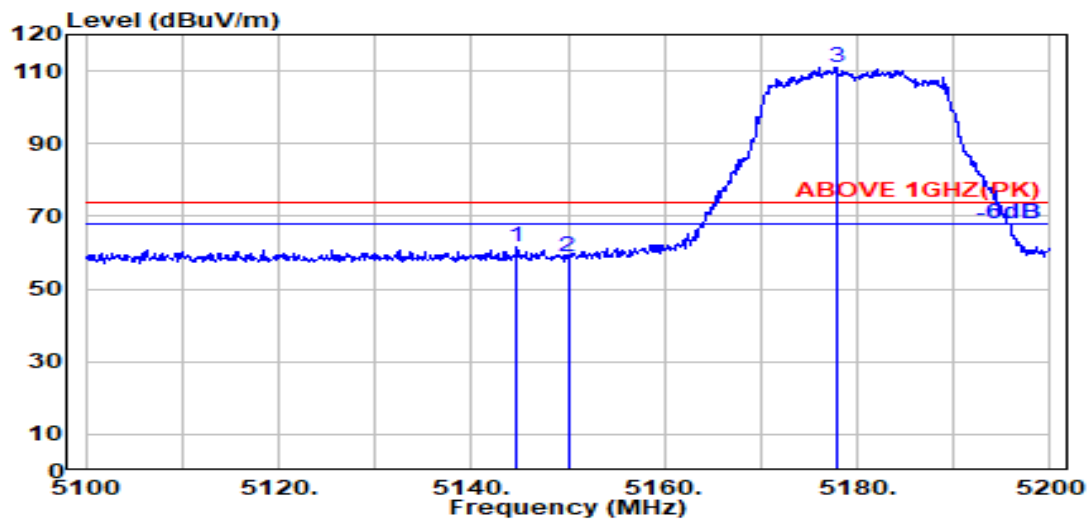

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	33.70	8.54	34.28	53.59	61.55	74.00	12.45	Peak
5150.000	33.70	8.54	34.28	50.92	58.88	74.00	15.12	Peak
@ 5177.800	33.70	8.56	34.27	103.13	111.12	---	---	Peak

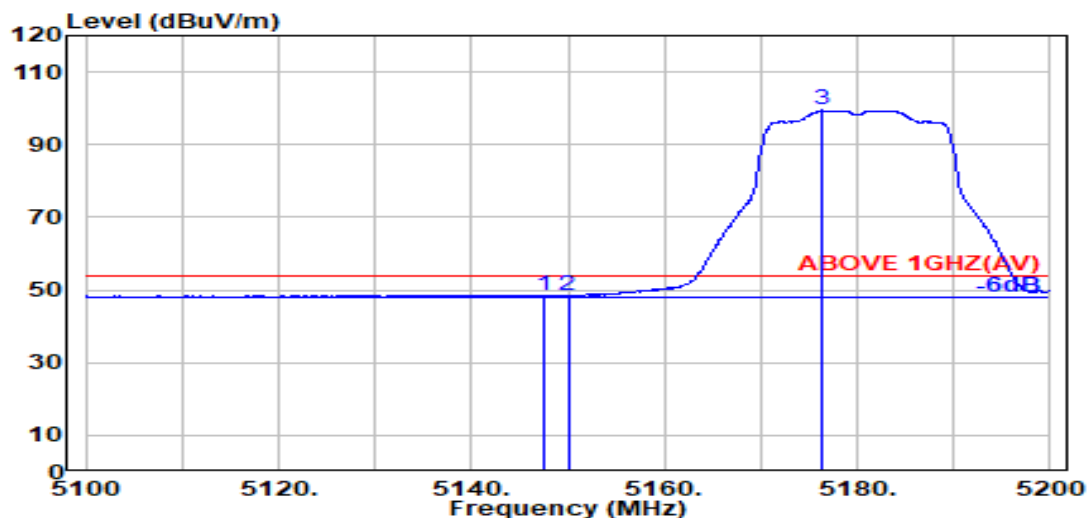

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	33.70	8.54	34.28	40.71	48.67	54.00	5.33	Average
5150.000	33.70	8.54	34.28	40.50	48.47	54.00	5.53	Average
@ 5176.300	33.70	8.56	34.27	91.51	99.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

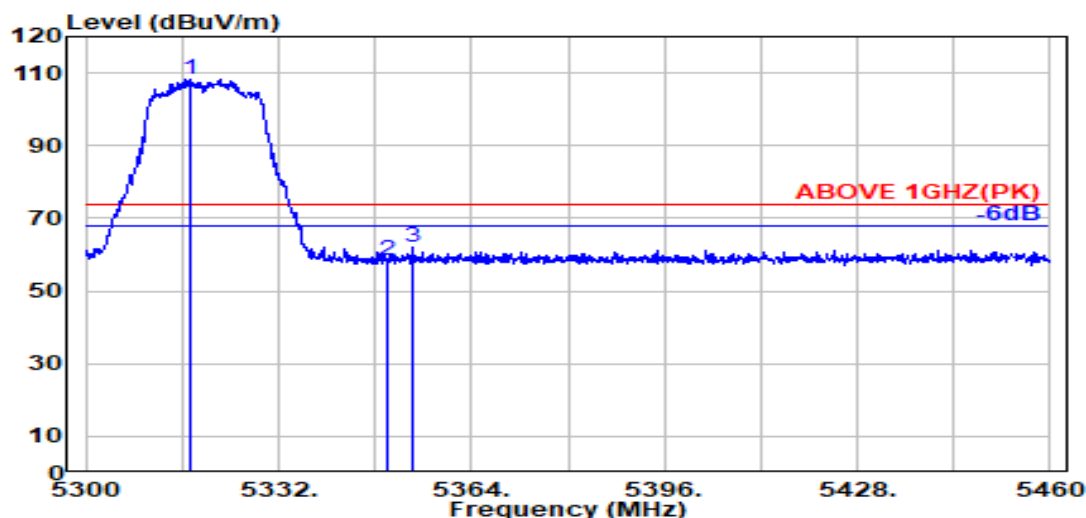

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.400	34.03	8.65	34.23	100.00	108.45	---	---	Peak
5350.000	33.90	8.67	34.22	50.14	58.49	74.00	15.51	Peak
5354.400	33.92	8.67	34.22	53.68	62.05	74.00	11.95	Peak

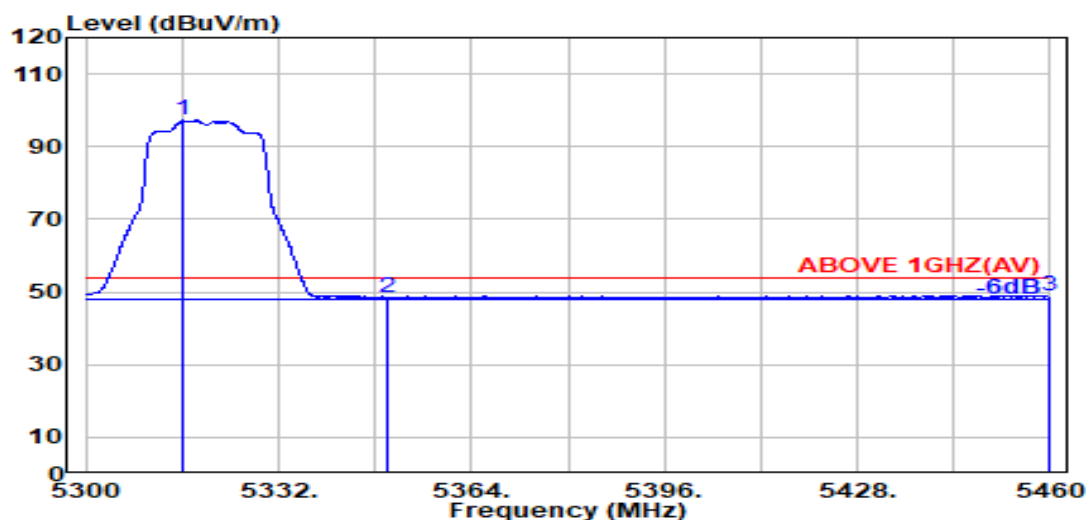

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	34.04	8.64	34.23	88.84	97.30	---	---	Average
5350.000	33.90	8.67	34.22	40.20	48.55	54.00	5.45	Average
5460.000	34.18	8.73	34.18	40.36	49.09	54.00	4.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

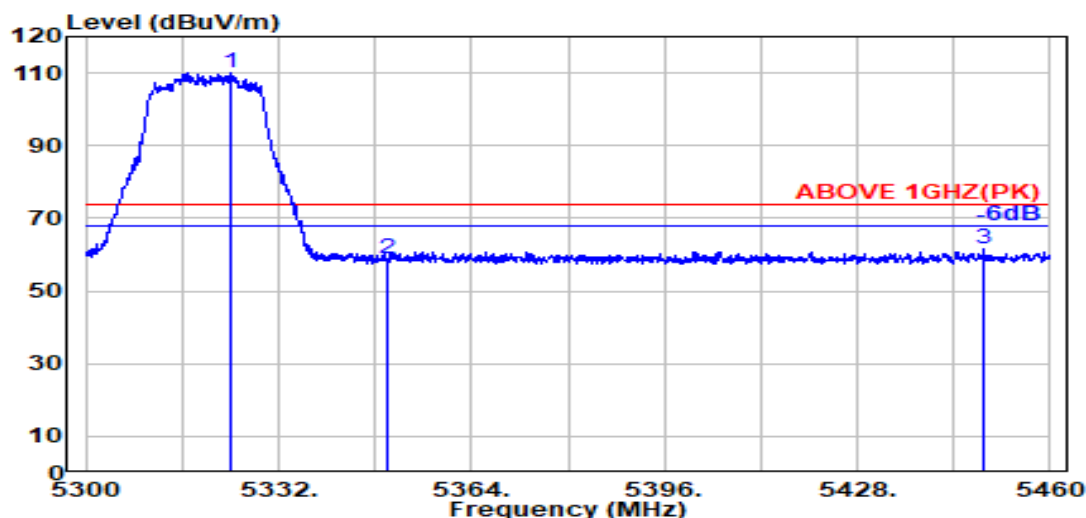

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.100	34.00	8.65	34.22	101.66	110.09	---	---	Peak
5350.000	33.90	8.67	34.22	50.52	58.87	74.00	15.13	Peak
5449.100	34.20	8.72	34.19	52.95	61.69	74.00	12.31	Peak

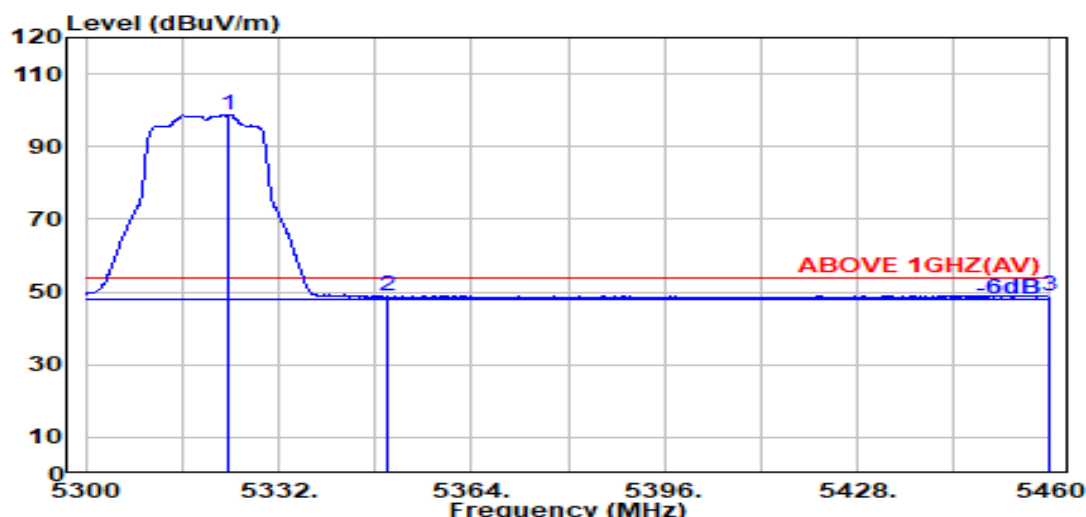

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	34.01	8.65	34.22	90.43	98.86	---	---	Average
5350.000	33.90	8.67	34.22	40.35	48.70	54.00	5.30	Average
5459.900	34.18	8.73	34.18	40.26	48.99	54.00	5.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

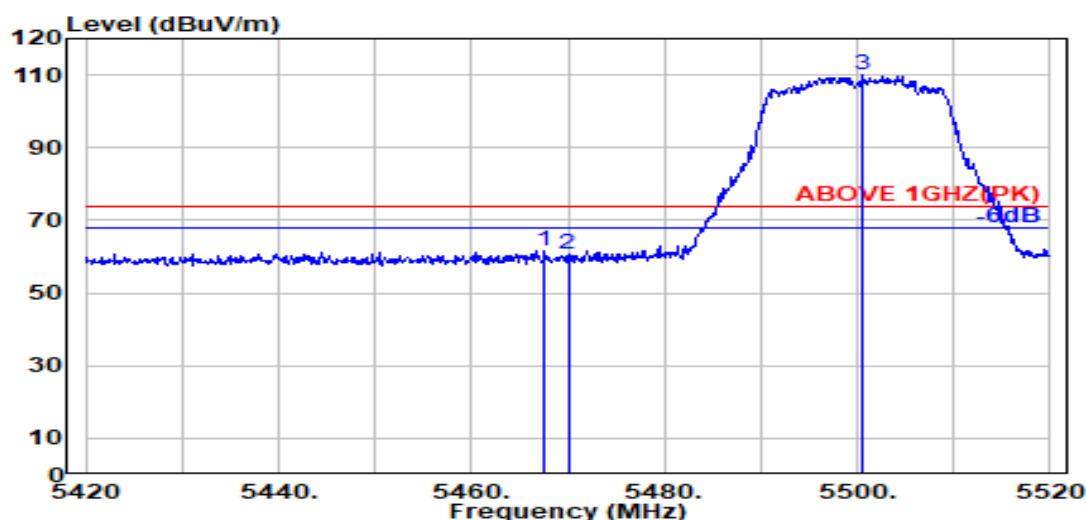

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.16	8.73	34.18	52.89	61.60	74.00	12.40	Peak
5470.000	34.16	8.74	34.18	52.06	60.77	74.00	13.23	Peak
@ 5500.500	34.10	8.75	34.17	101.21	109.89	---	---	Peak

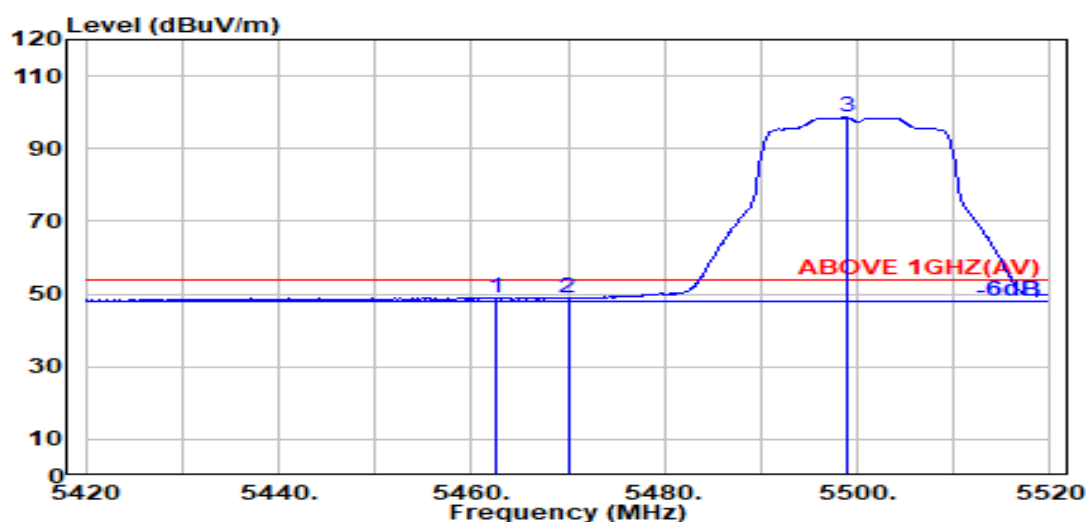

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.17	8.73	34.18	40.29	49.01	54.00	4.99	Average
5470.000	34.16	8.74	34.18	40.20	48.92	54.00	5.08	Average
@ 5499.000	34.10	8.75	34.17	89.88	98.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

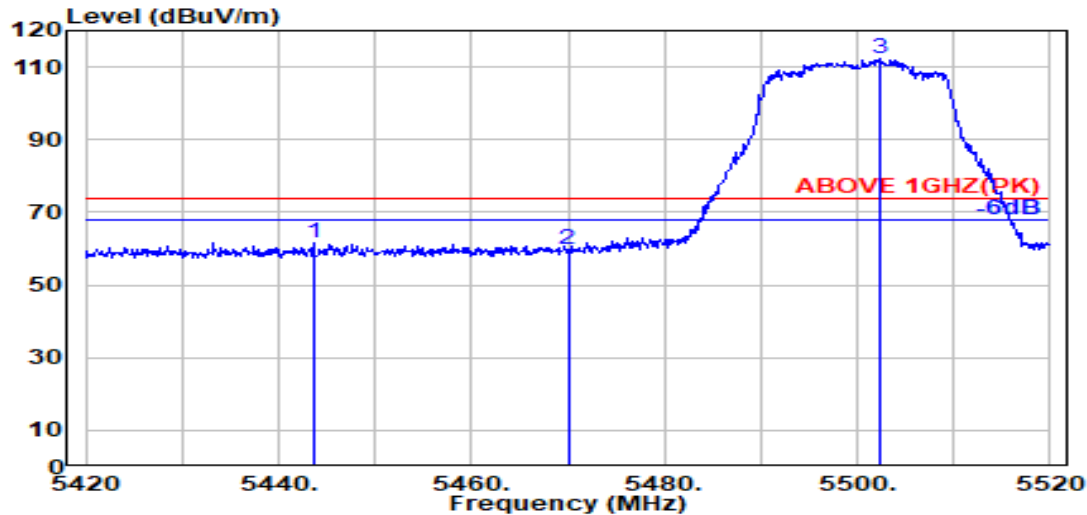

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.600	34.19	8.72	34.19	53.08	61.80	74.00	12.20	Peak
5470.000	34.16	8.74	34.18	50.88	59.59	74.00	14.41	Peak
@ 5502.300	34.10	8.75	34.17	103.73	112.42	---	---	Peak

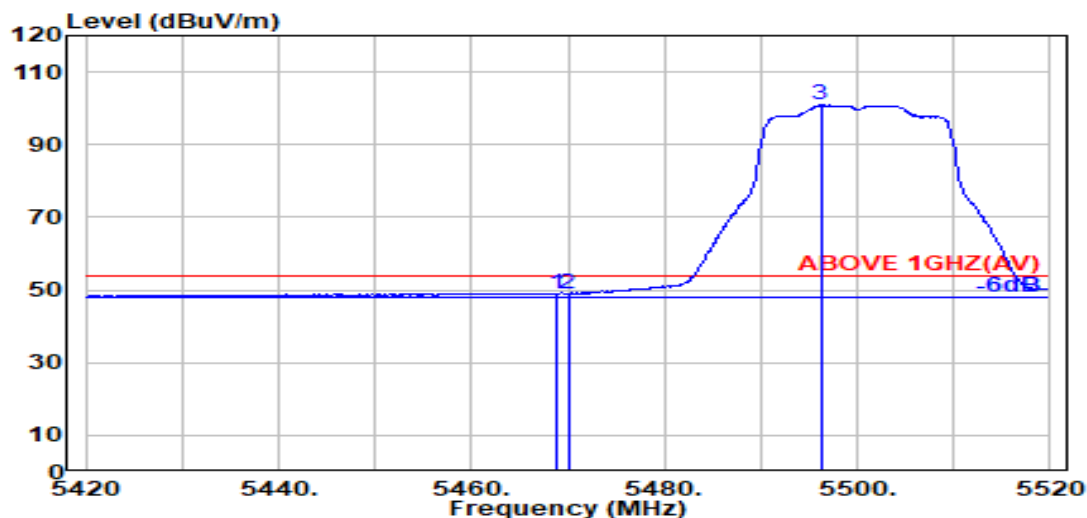

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	40.41	49.13	54.00	4.87	Average
5470.000	34.16	8.74	34.18	40.29	49.01	54.00	4.99	Average
@ 5496.200	34.11	8.75	34.17	92.25	100.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

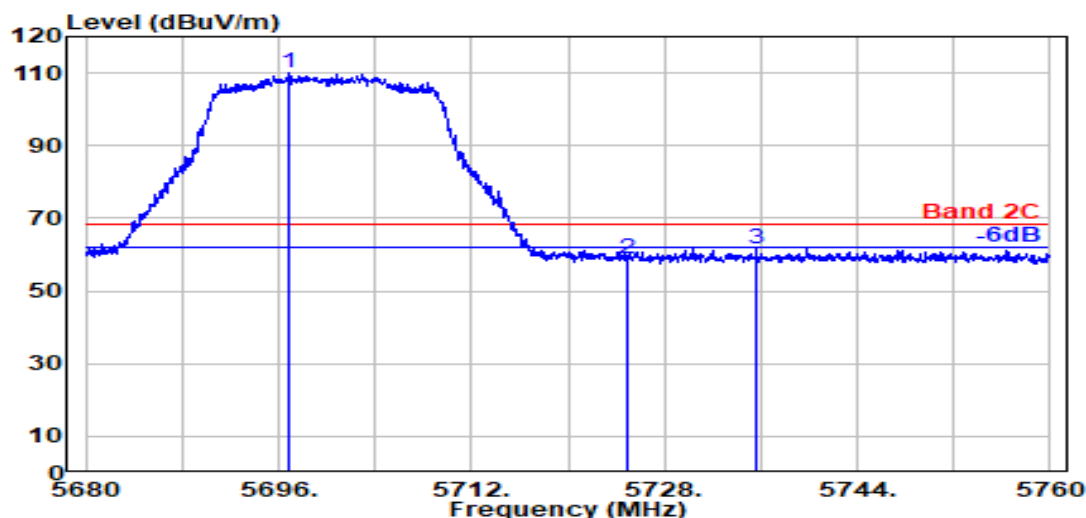

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.900	33.81	8.87	34.26	101.42	109.83	---	---	Peak
5725.000	33.80	8.88	34.28	50.60	59.00	68.20	9.20	Peak
5735.650	33.80	8.89	34.28	53.14	61.54	68.20	6.66	Peak

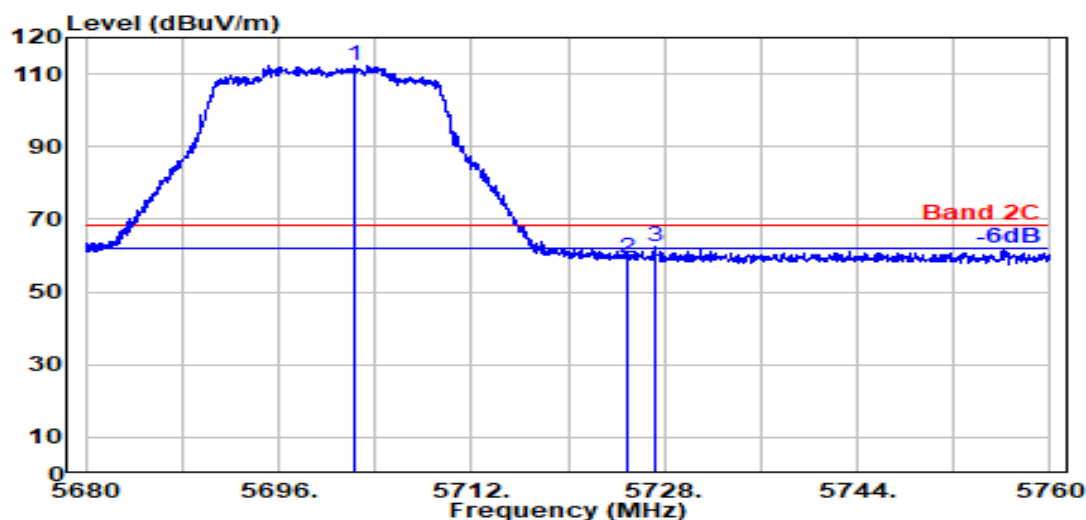

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.250	33.80	8.87	34.27	104.12	112.52	---	---	Peak
5725.000	33.80	8.88	34.28	50.83	59.23	68.20	8.97	Peak
5727.150	33.80	8.88	34.28	54.10	62.50	68.20	5.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

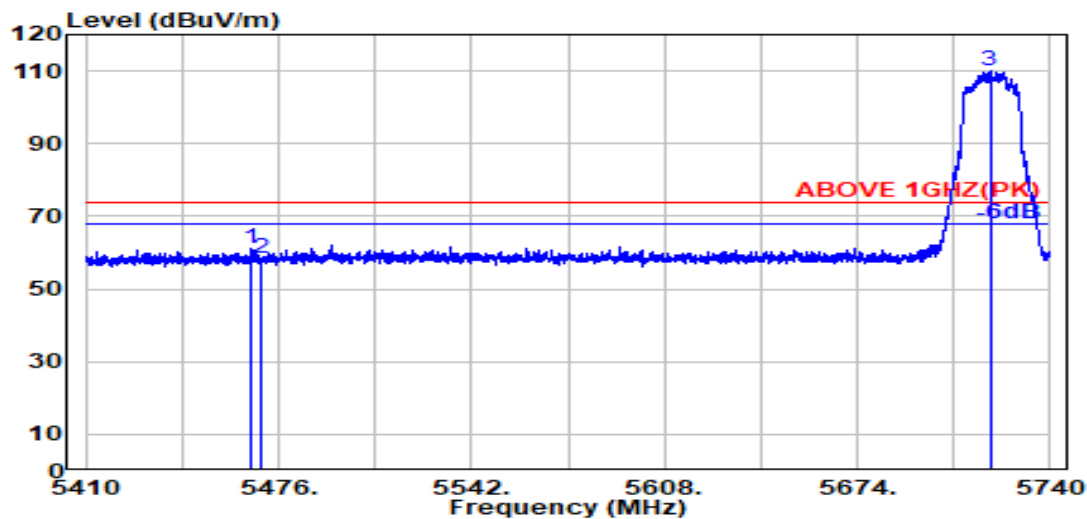

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.17	8.73	34.18	52.48	61.20	74.00	12.80	Peak
5470.000	34.16	8.74	34.18	49.63	58.35	74.00	15.65	Peak
@ 5719.400	33.80	8.88	34.27	101.62	110.03	---	---	Peak

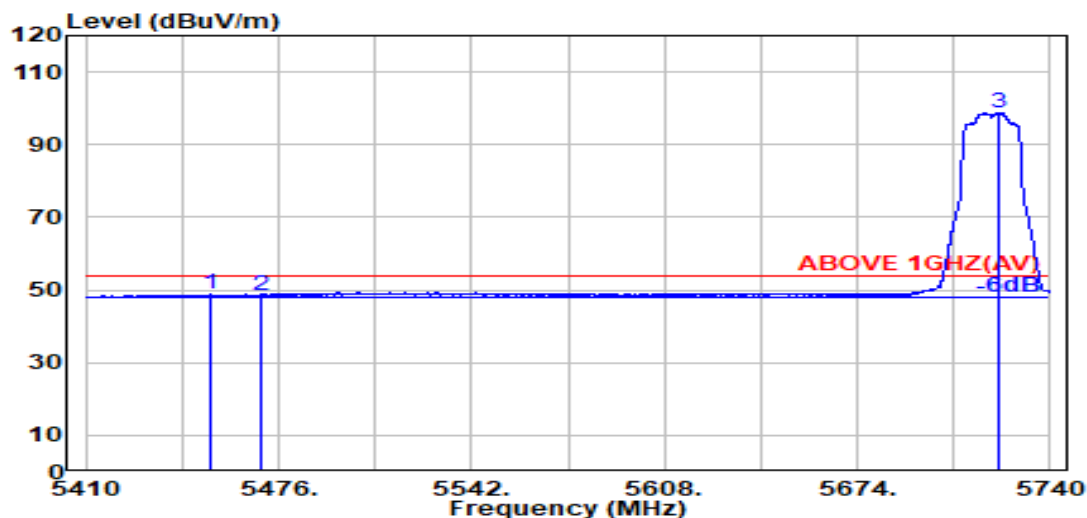

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.100	34.19	8.73	34.18	40.01	48.74	54.00	5.26	Average
5470.000	34.16	8.74	34.18	39.74	48.45	54.00	5.55	Average
@ 5722.000	33.80	8.88	34.27	90.42	98.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

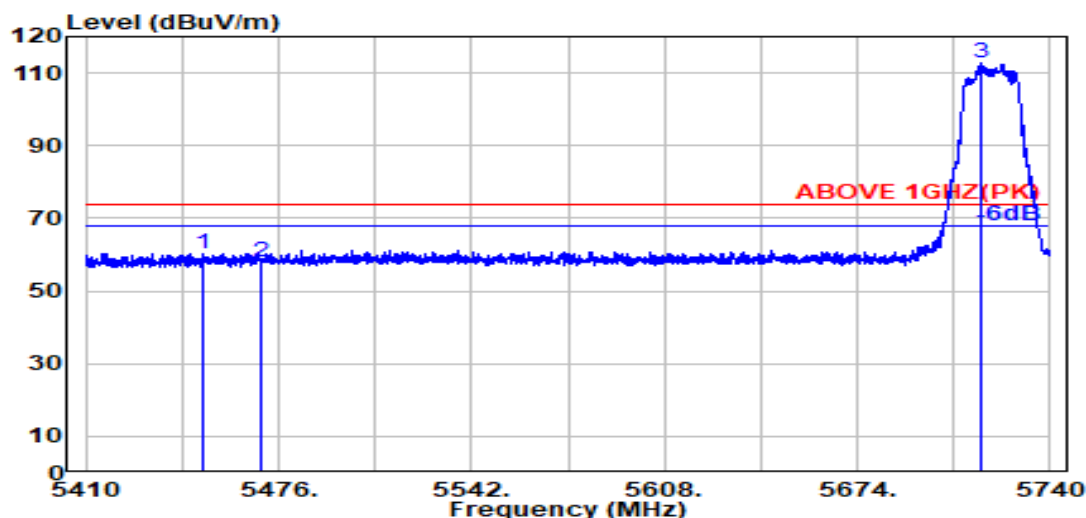

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.000	34.20	8.72	34.19	51.68	60.42	74.00	13.58	Peak
5470.000	34.16	8.74	34.18	49.32	58.03	74.00	15.97	Peak
@ 5716.700	33.80	8.88	34.27	104.27	112.67	---	---	Peak

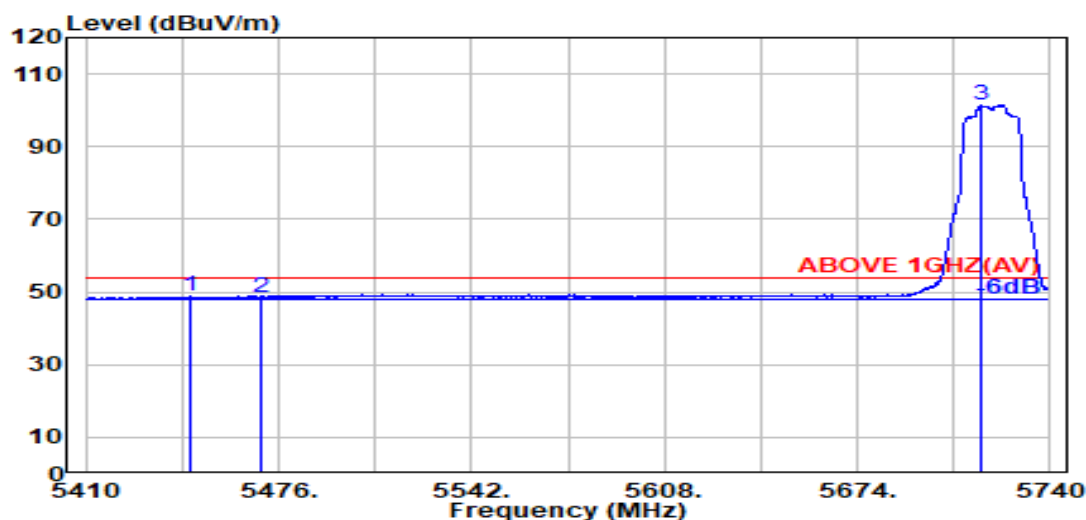

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	34.19	8.72	34.19	40.05	48.77	54.00	5.23	Average
5470.000	34.16	8.74	34.18	39.81	48.53	54.00	5.47	Average
@ 5716.200	33.80	8.88	34.27	93.02	101.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

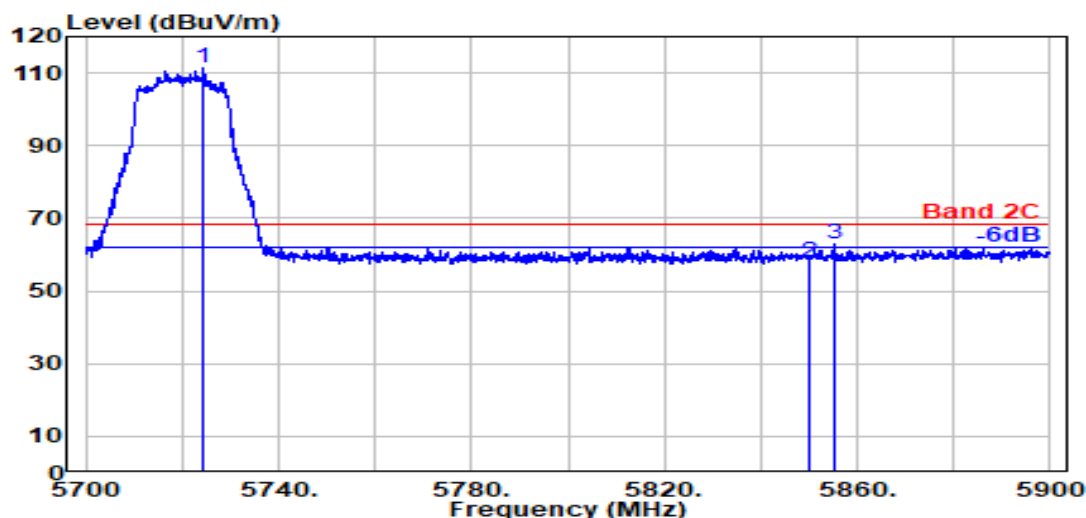

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.200	33.80	8.88	34.28	102.87	111.28	---	---	Peak
5850.000	34.10	8.95	34.33	49.26	57.97	68.20	10.23	Peak
5855.400	34.10	8.95	34.34	54.20	62.91	68.20	5.29	Peak

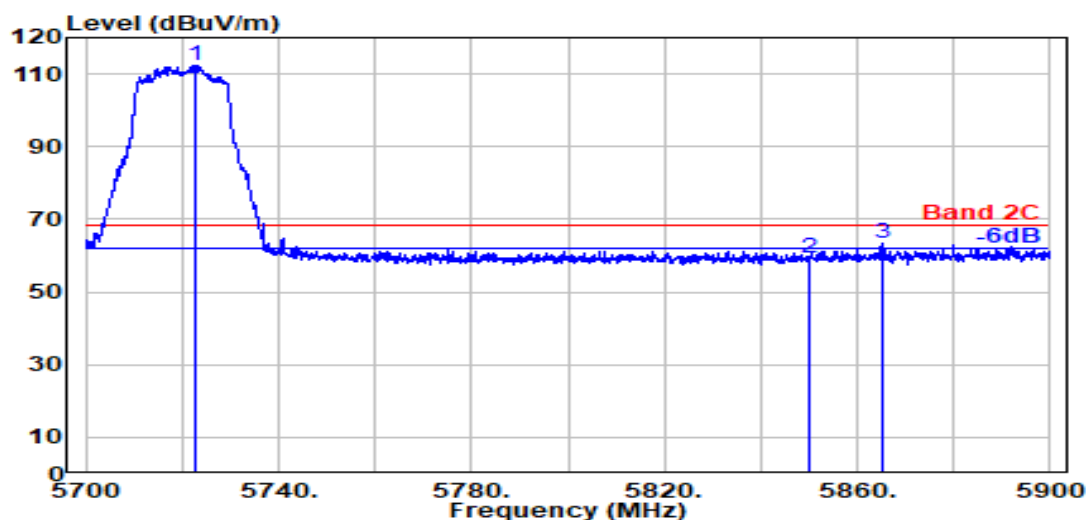

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.600	33.80	8.88	34.27	104.08	112.48	---	---	Peak
5850.000	34.10	8.95	34.33	50.81	59.52	68.20	8.68	Peak
5865.400	34.10	8.96	34.34	54.50	63.22	68.20	4.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

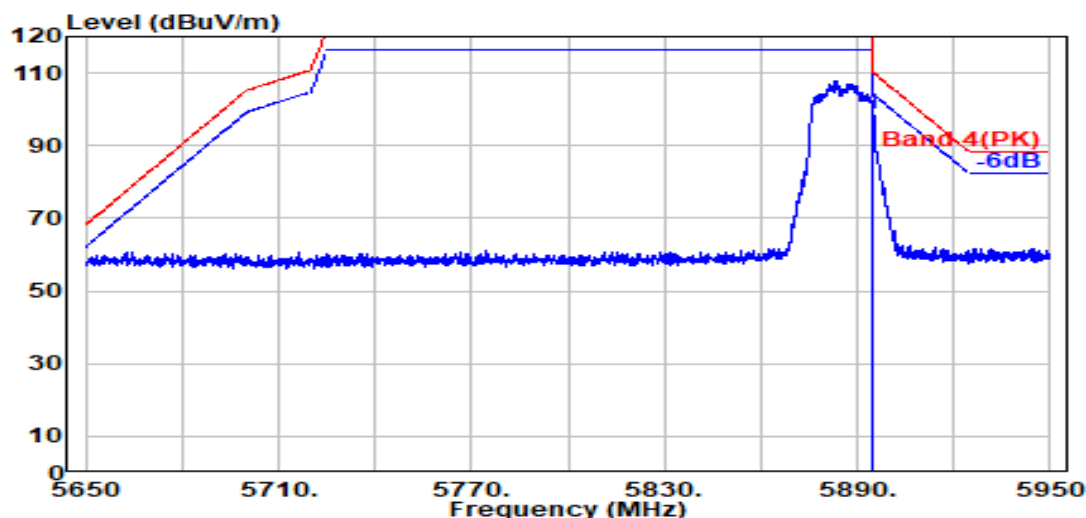

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	89.99	98.71	110.20	11.49	Peak

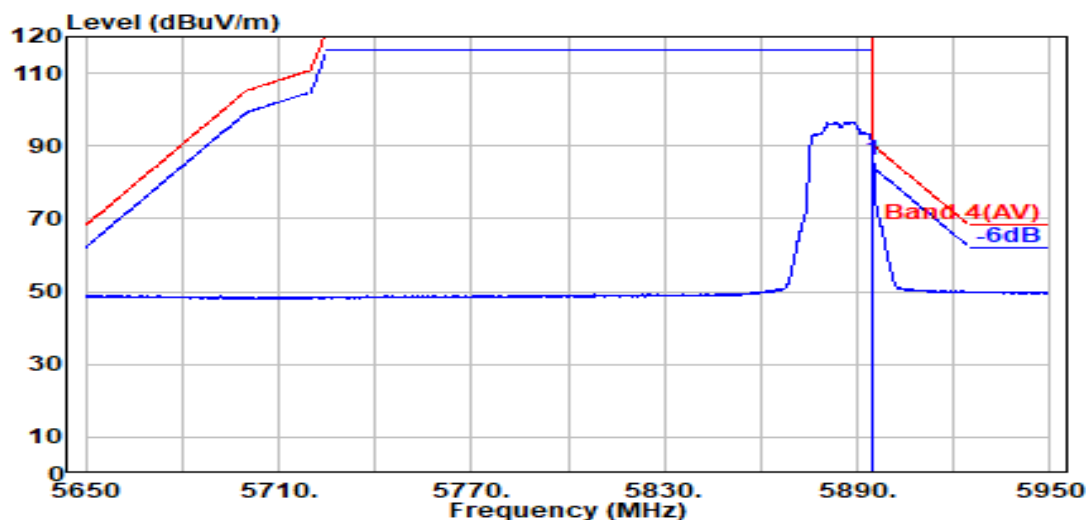

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	77.29	86.01	90.20	4.19	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

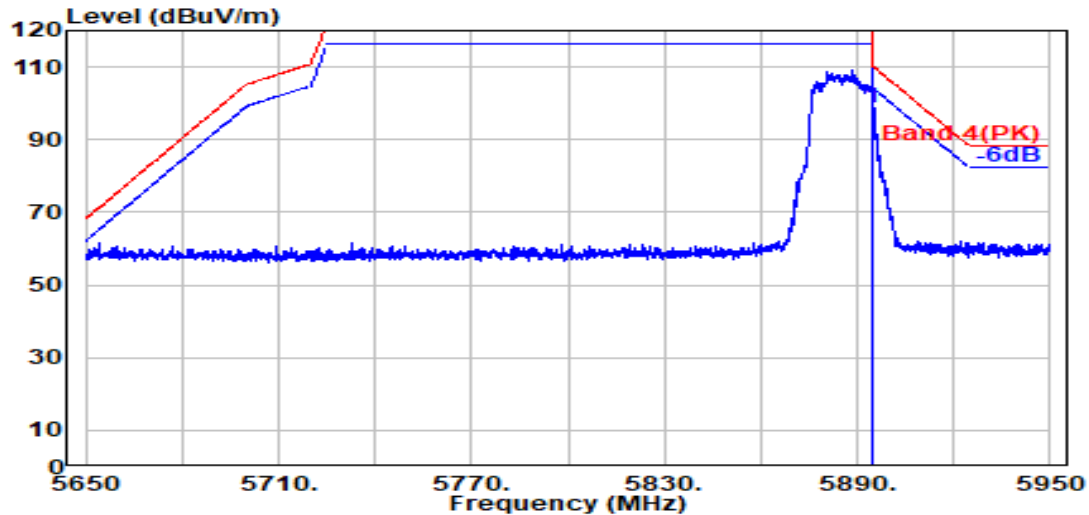

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	90.12	98.84	110.20	11.36	Peak

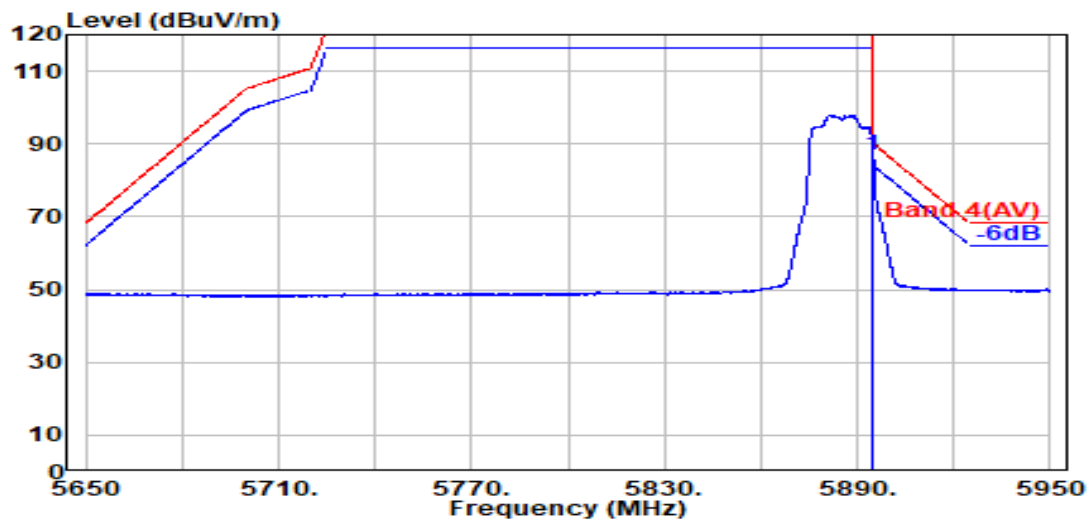

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	78.08	86.80	90.20	3.40	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

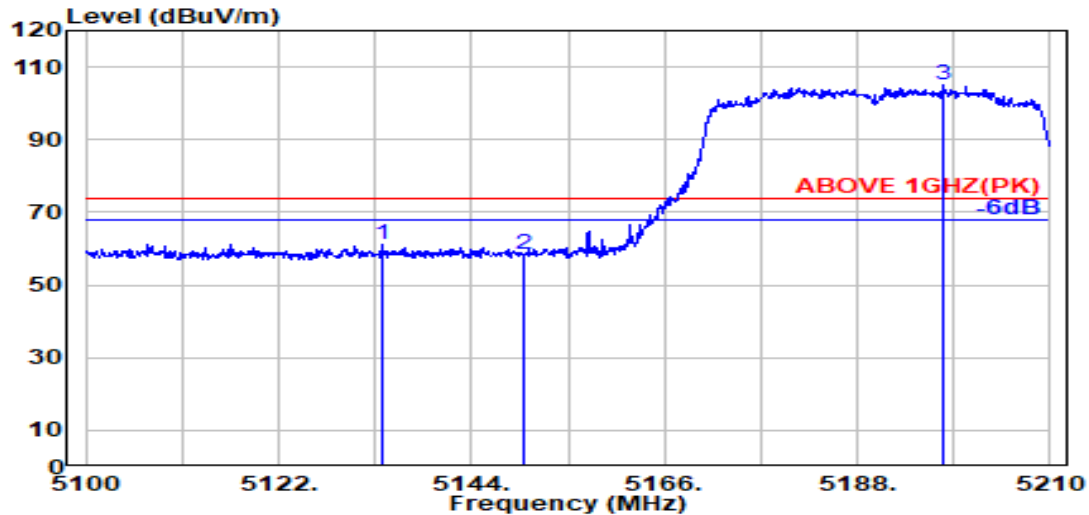

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.900	33.70	8.53	34.29	53.29	61.24	74.00	12.76	Peak
5150.000	33.70	8.54	34.28	50.58	58.54	74.00	15.46	Peak
@ 5197.900	33.70	8.57	34.26	96.89	104.90	---	---	Peak

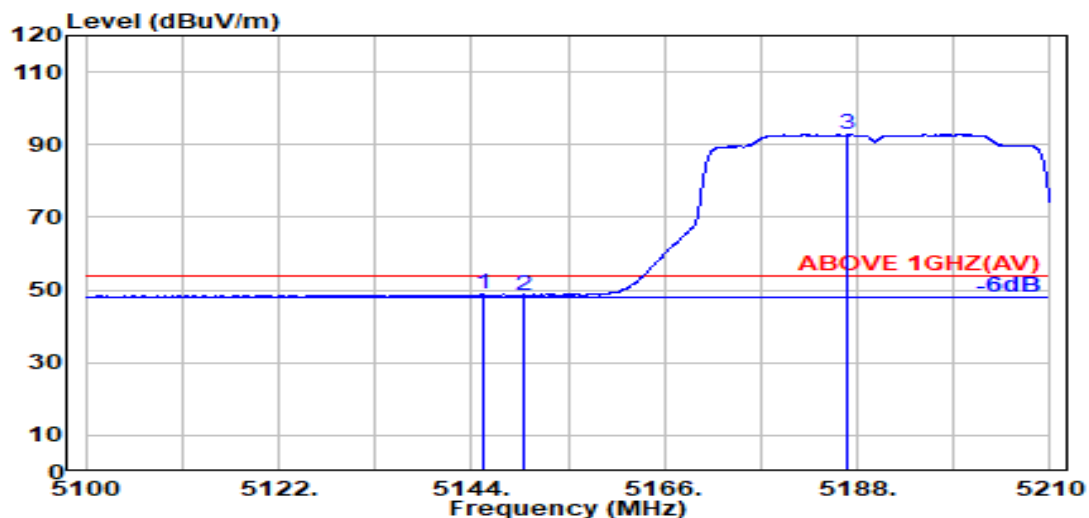

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.70	8.54	34.28	40.86	48.82	54.00	5.18	Average
5150.000	33.70	8.54	34.28	40.59	48.55	54.00	5.45	Average
@ 5186.900	33.70	8.57	34.27	84.89	92.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

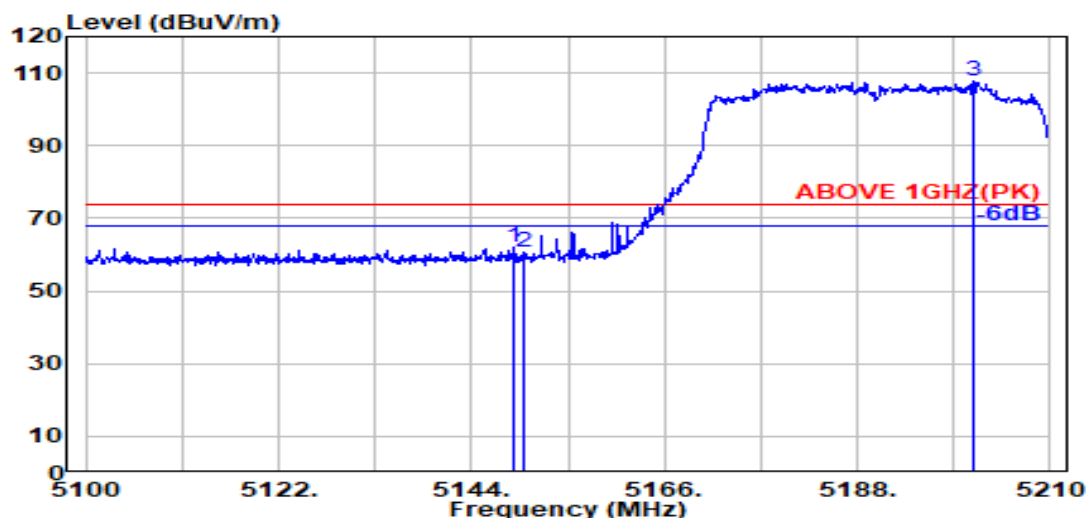

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.70	8.54	34.28	54.26	62.22	74.00	11.78	Peak
5150.000	33.70	8.54	34.28	52.67	60.63	74.00	13.37	Peak
@ 5201.300	33.70	8.58	34.26	99.95	107.97	---	---	Peak

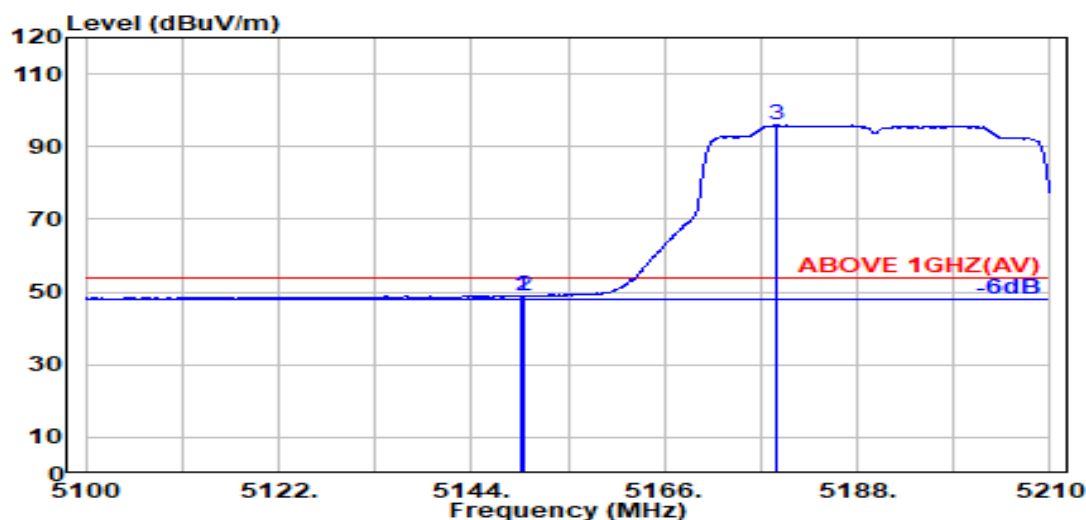

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.28	41.14	49.10	54.00	4.90	Average
5150.000	33.70	8.54	34.28	40.90	48.86	54.00	5.14	Average
@ 5178.700	33.70	8.56	34.27	87.96	95.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

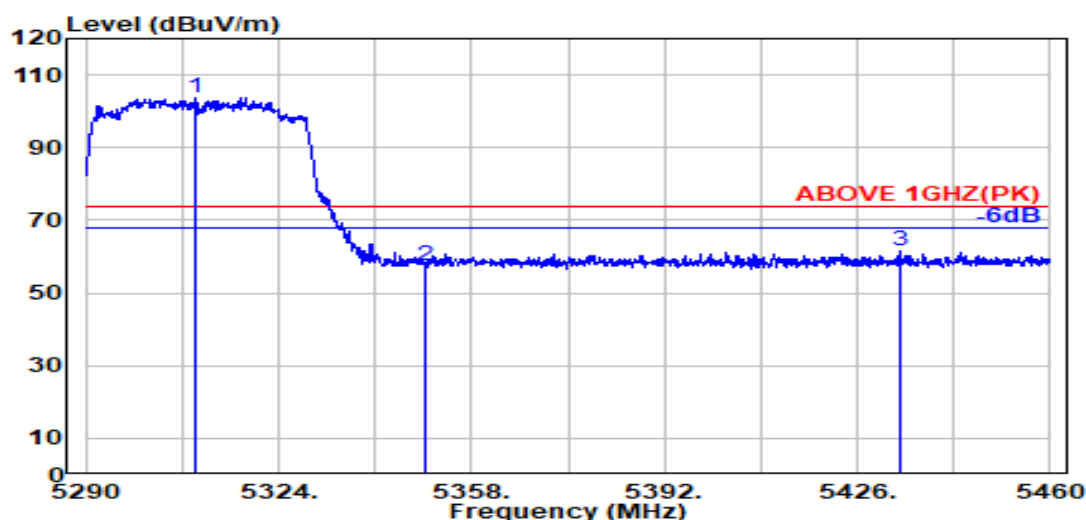

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.500	34.06	8.64	34.23	95.45	103.92	---	---	Peak
5350.000	33.90	8.67	34.22	49.20	57.54	74.00	16.46	Peak
5433.400	34.17	8.71	34.19	52.82	61.51	74.00	12.49	Peak

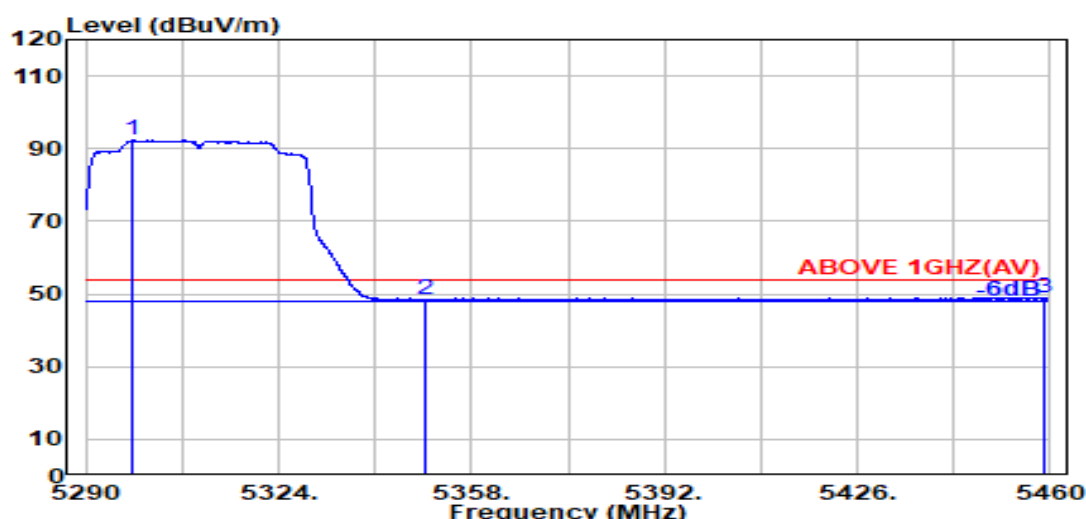

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.400	34.09	8.63	34.23	83.87	92.36	---	---	Average
5350.000	33.90	8.67	34.22	40.16	48.51	54.00	5.49	Average
5458.800	34.18	8.73	34.18	40.32	49.05	54.00	4.95	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

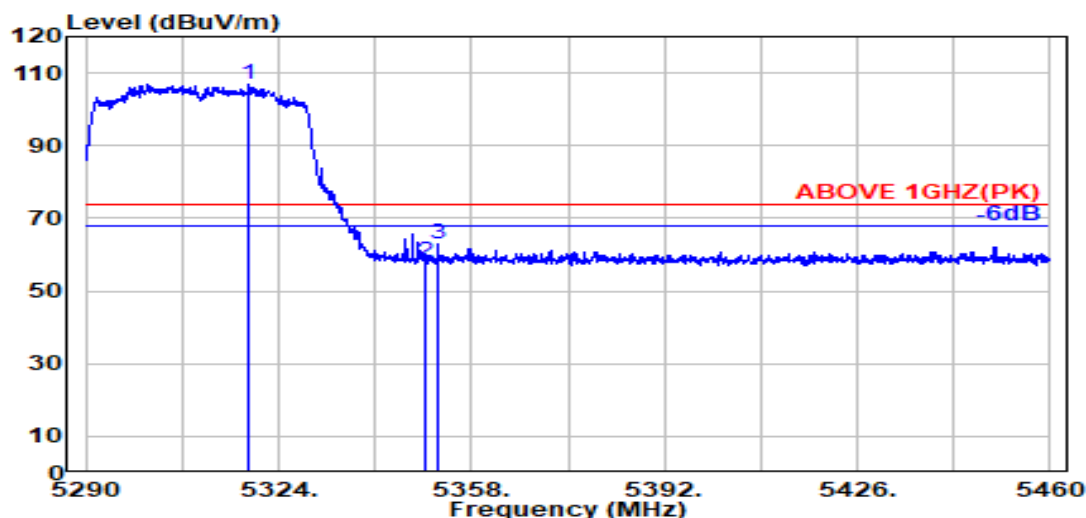

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.600	34.03	8.65	34.23	98.63	107.08	---	---	Peak
5350.000	33.90	8.67	34.22	49.59	57.94	74.00	16.06	Peak
5352.000	33.91	8.67	34.22	54.48	62.84	74.00	11.16	Peak

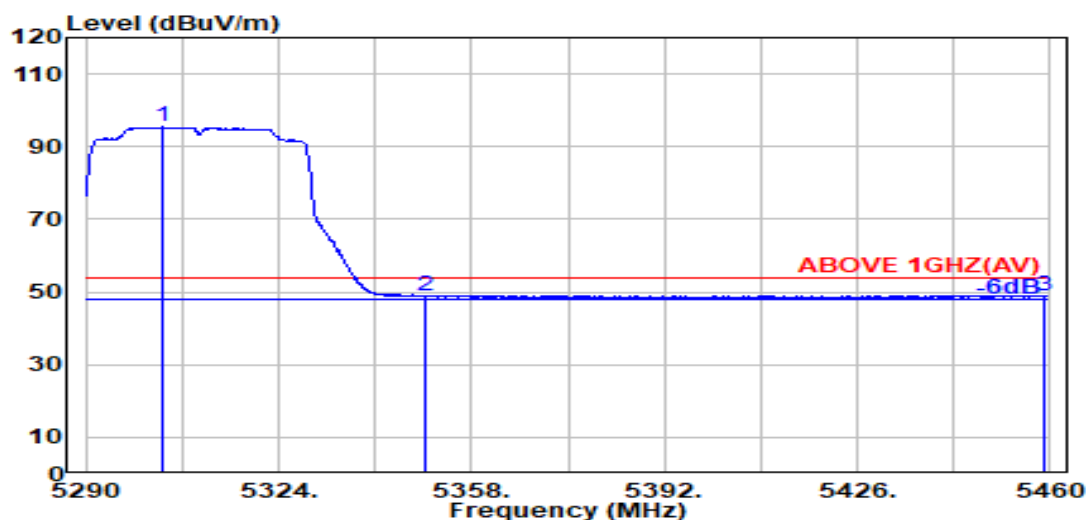

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.600	34.09	8.64	34.23	86.99	95.48	---	---	Average
5350.000	33.90	8.67	34.22	40.56	48.91	54.00	5.09	Average
5458.900	34.18	8.73	34.18	40.37	49.10	54.00	4.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

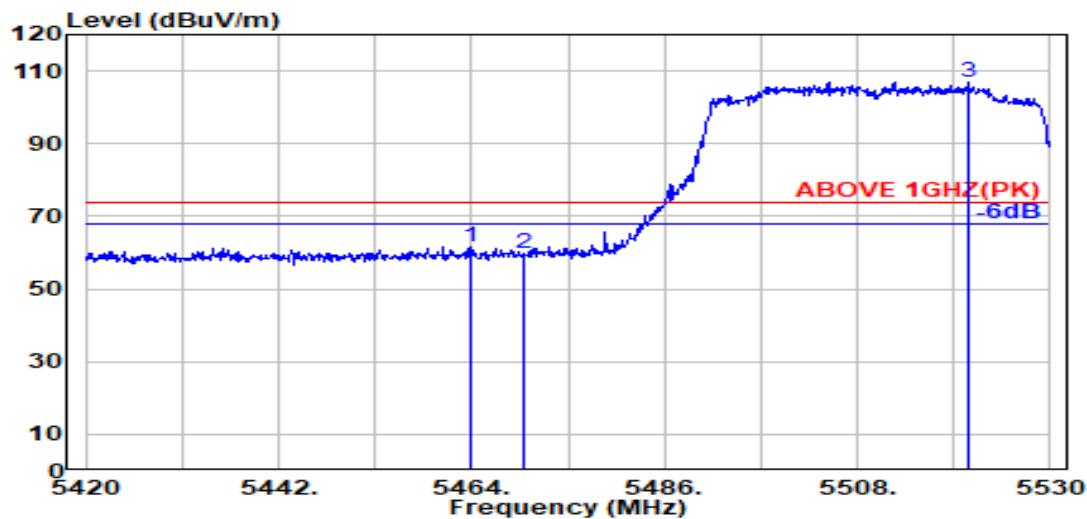

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.17	8.73	34.18	52.91	61.63	74.00	12.37	Peak
5470.000	34.16	8.74	34.18	51.05	59.77	74.00	14.23	Peak
@ 5520.700	34.10	8.77	34.18	98.40	107.08	---	---	Peak

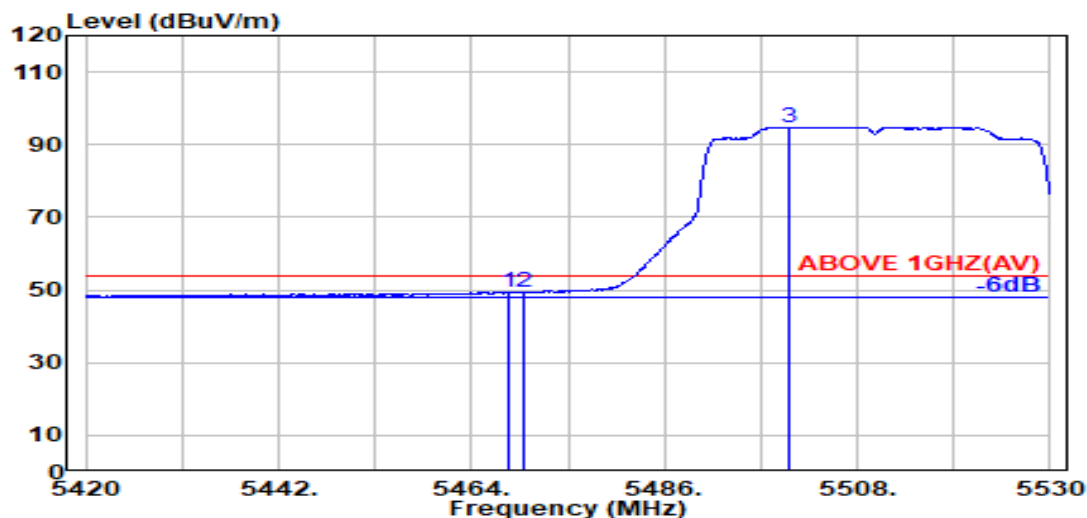

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.16	8.73	34.18	40.62	49.34	54.00	4.66	Average
5470.000	34.16	8.74	34.18	40.72	49.43	54.00	4.57	Average
@ 5500.100	34.10	8.75	34.17	86.18	94.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

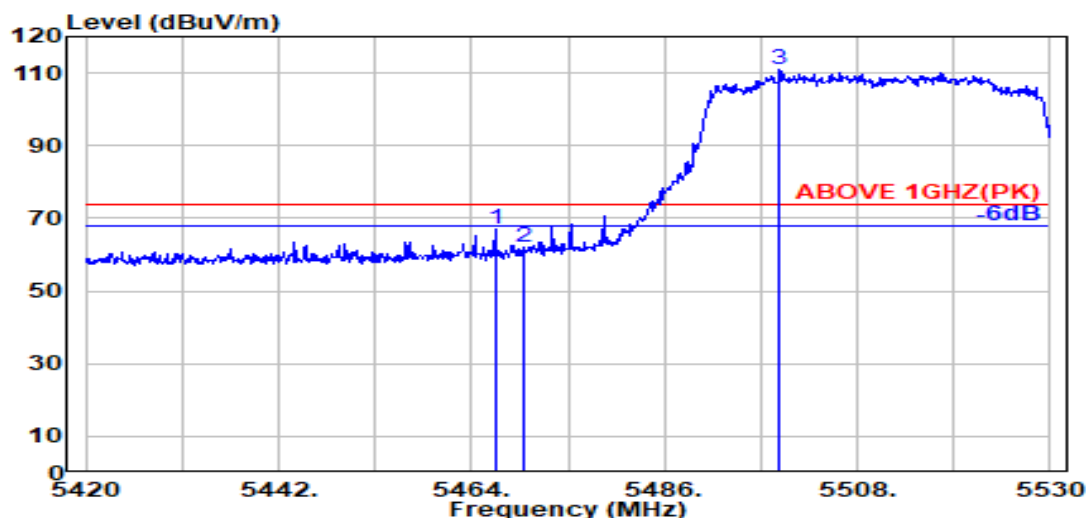

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.17	8.73	34.18	58.40	67.12	74.00	6.88	Peak
5470.000	34.16	8.74	34.18	53.17	61.88	74.00	12.12	Peak
@ 5499.200	34.10	8.75	34.17	102.08	110.76	---	---	Peak

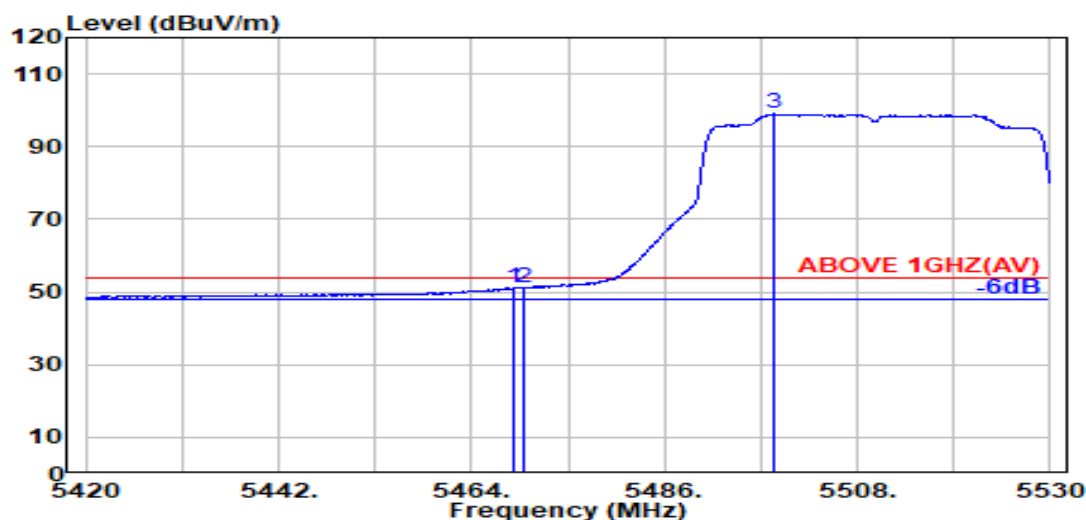

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	42.49	51.21	54.00	2.79	Average
5470.000	34.16	8.74	34.18	42.30	51.02	54.00	2.98	Average
@ 5498.500	34.10	8.75	34.17	90.26	98.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

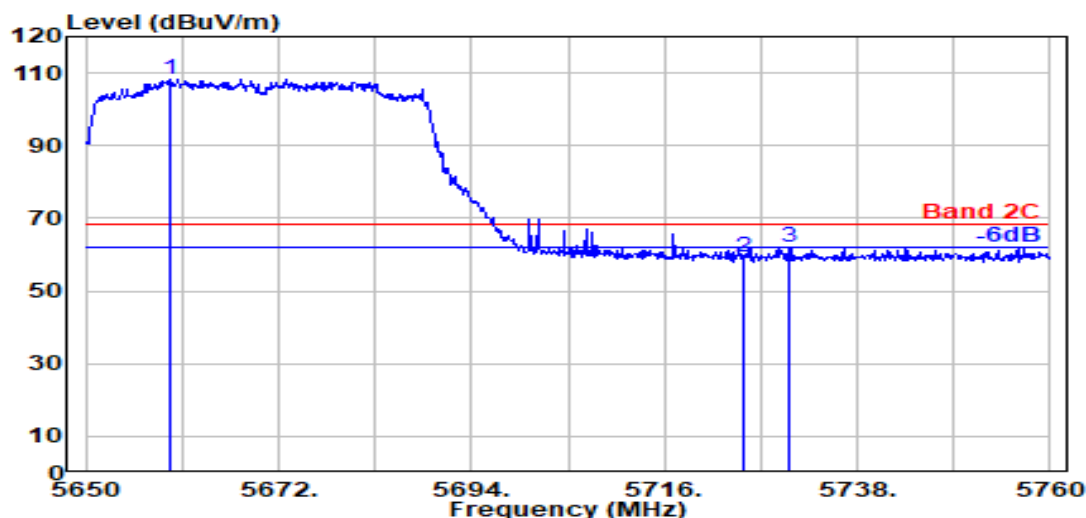

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.700	33.96	8.84	34.25	99.88	108.44	---	---	Peak
5725.000	33.80	8.88	34.28	50.81	59.21	68.20	8.99	Peak
5730.300	33.80	8.88	34.28	53.68	62.09	68.20	6.11	Peak

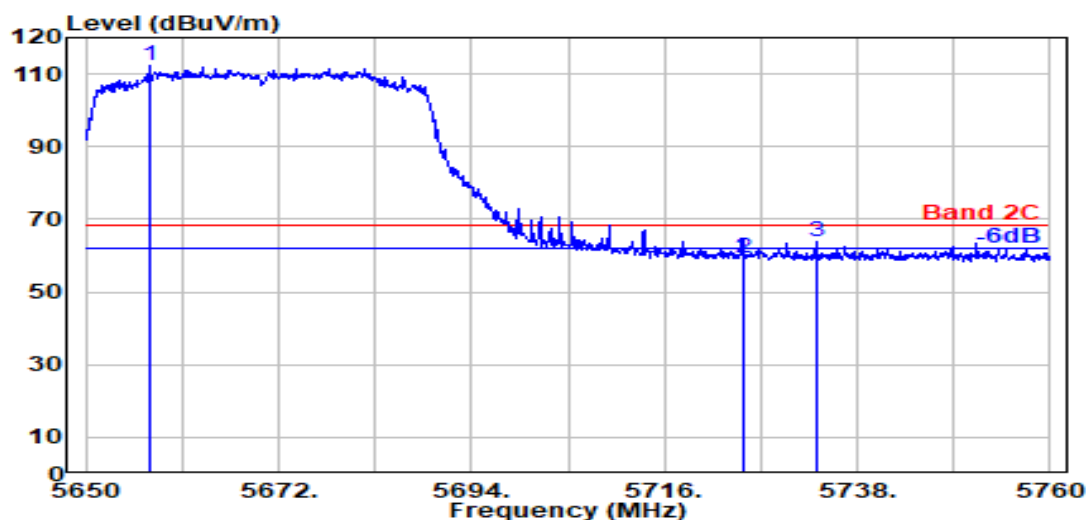

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.200	33.97	8.84	34.24	103.57	112.14	---	---	Peak
5725.000	33.80	8.88	34.28	50.69	59.09	68.20	9.11	Peak
5733.300	33.80	8.89	34.28	55.57	63.98	68.20	4.22	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

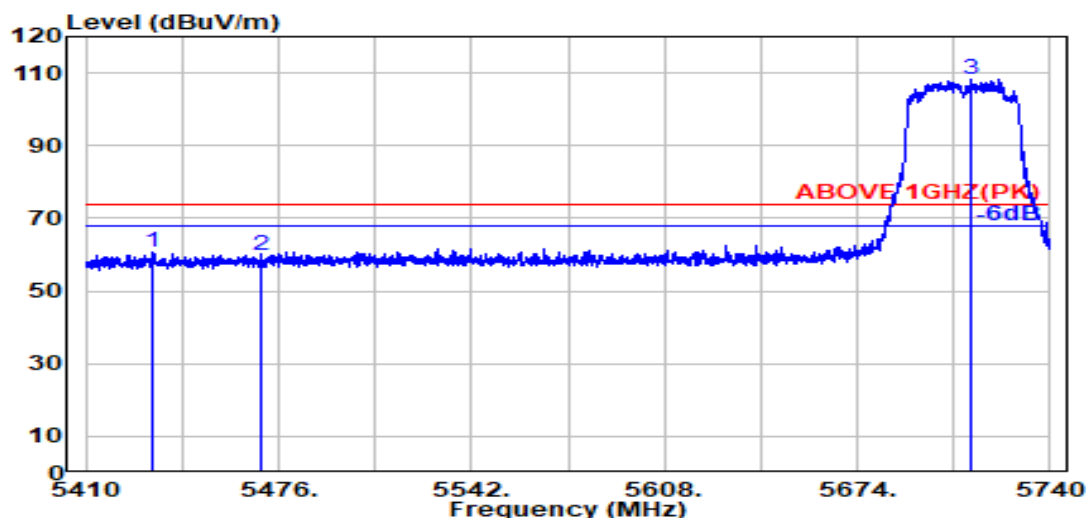

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.000	34.17	8.71	34.19	51.84	60.53	74.00	13.47	Peak
5470.000	34.16	8.74	34.18	51.06	59.78	74.00	14.22	Peak
@ 5712.800	33.80	8.87	34.27	99.86	108.26	---	---	Peak

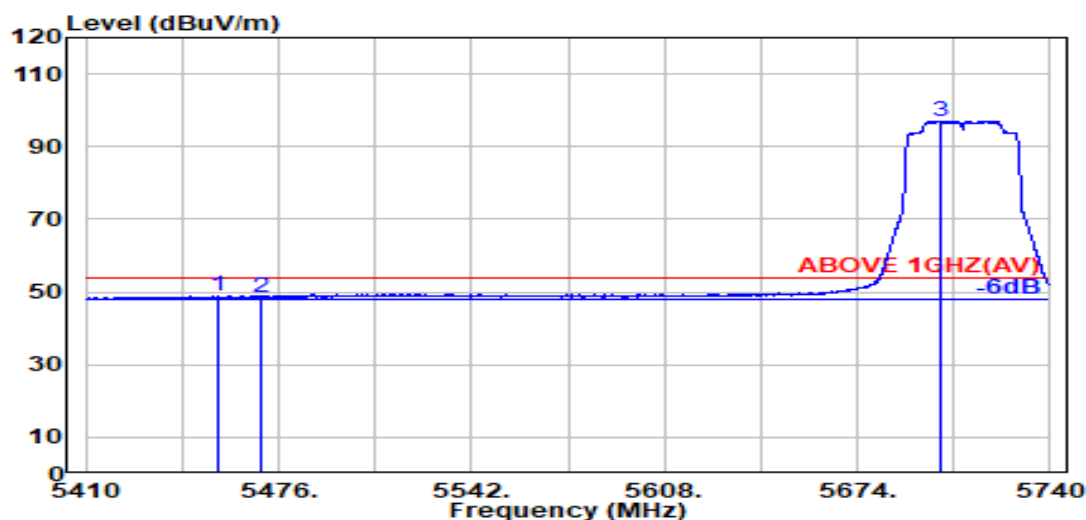

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.600	34.19	8.73	34.18	40.06	48.79	54.00	5.21	Average
5470.000	34.16	8.74	34.18	39.82	48.54	54.00	5.46	Average
@ 5702.200	33.80	8.87	34.27	88.69	97.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

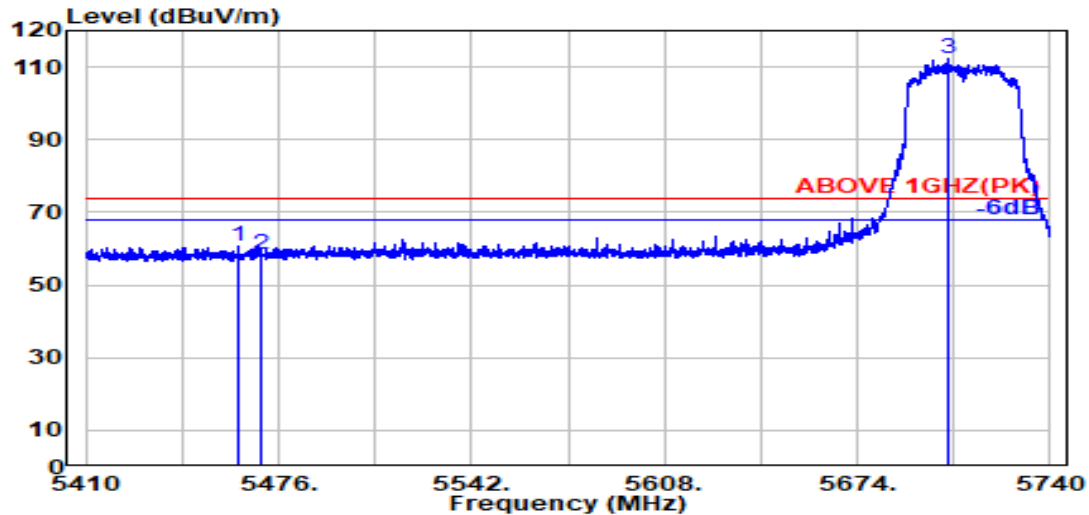

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.100	34.18	8.73	34.18	51.92	60.65	74.00	13.35	Peak
5470.000	34.16	8.74	34.18	49.61	58.33	74.00	15.67	Peak
@ 5705.400	33.80	8.87	34.27	103.89	112.29	---	---	Peak

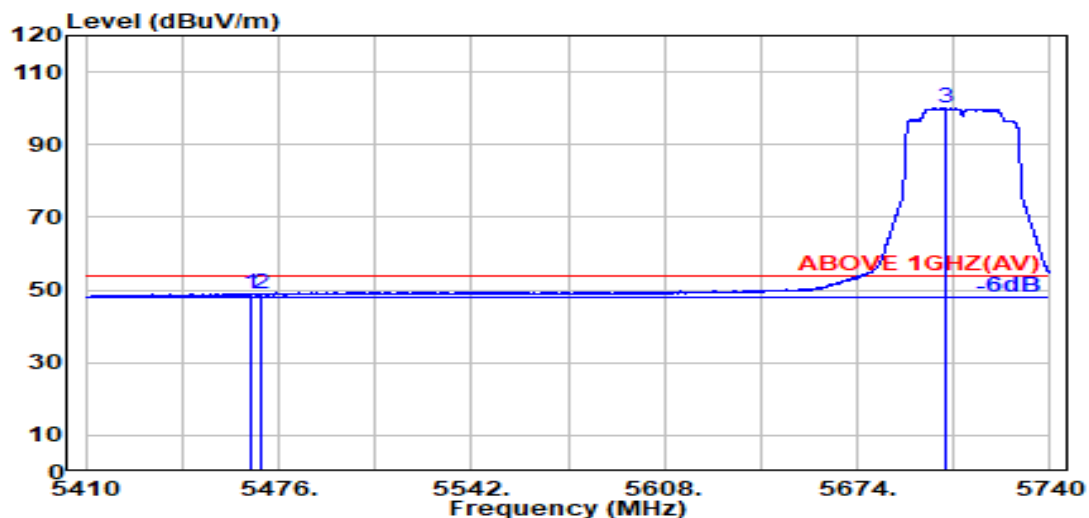

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	40.28	49.00	54.00	5.00	Average
5470.000	34.16	8.74	34.18	40.07	48.78	54.00	5.22	Average
@ 5704.500	33.80	8.87	34.27	91.59	99.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

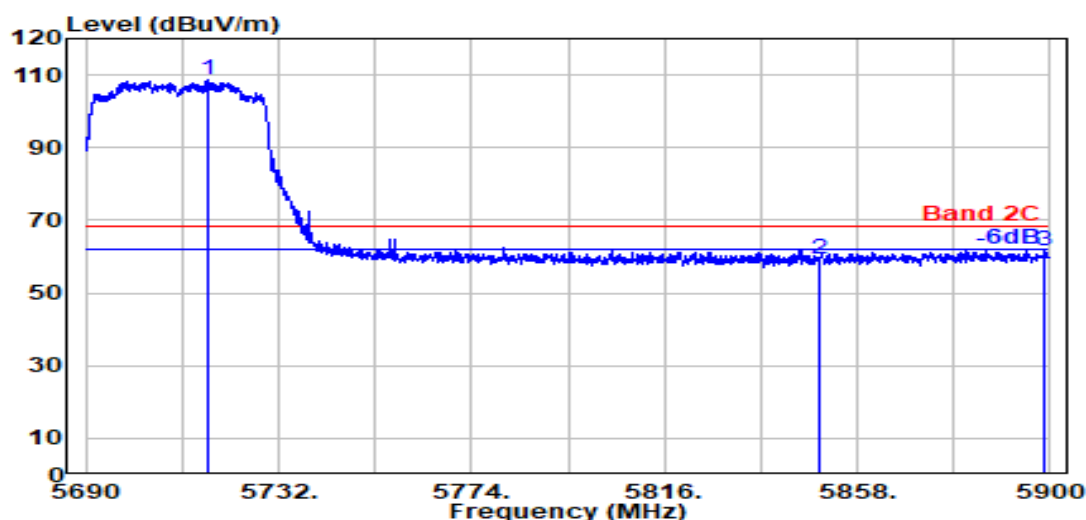

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.400	33.80	8.88	34.27	100.24	108.65	---	---	Peak
5850.000	34.10	8.95	34.33	50.65	59.37	68.20	8.83	Peak
5898.900	34.10	8.98	34.36	53.07	61.79	68.20	6.41	Peak

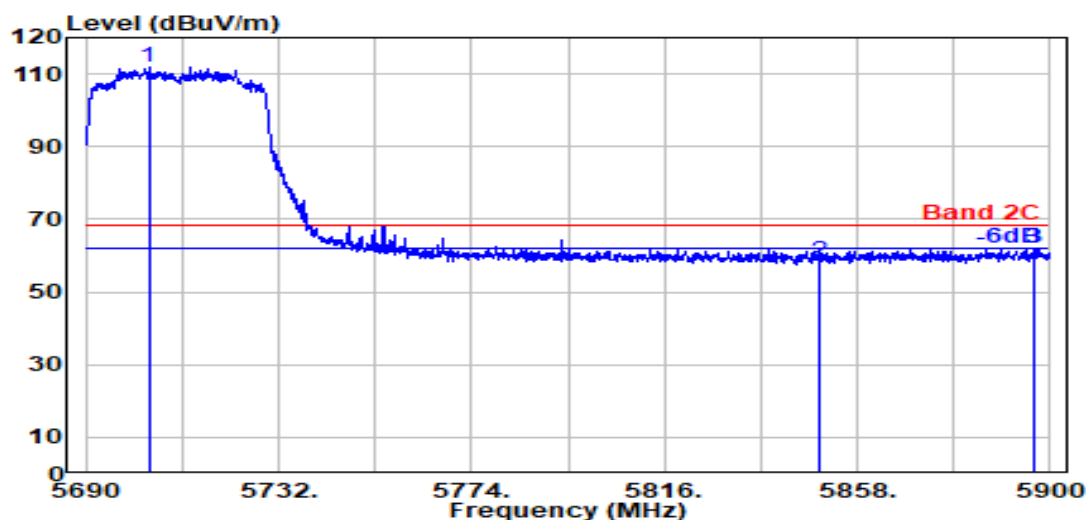

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.700	33.80	8.87	34.27	103.47	111.88	---	---	Peak
5850.000	34.10	8.95	34.33	49.67	58.39	68.20	9.81	Peak
5896.500	34.10	8.97	34.35	53.23	61.95	68.20	6.25	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

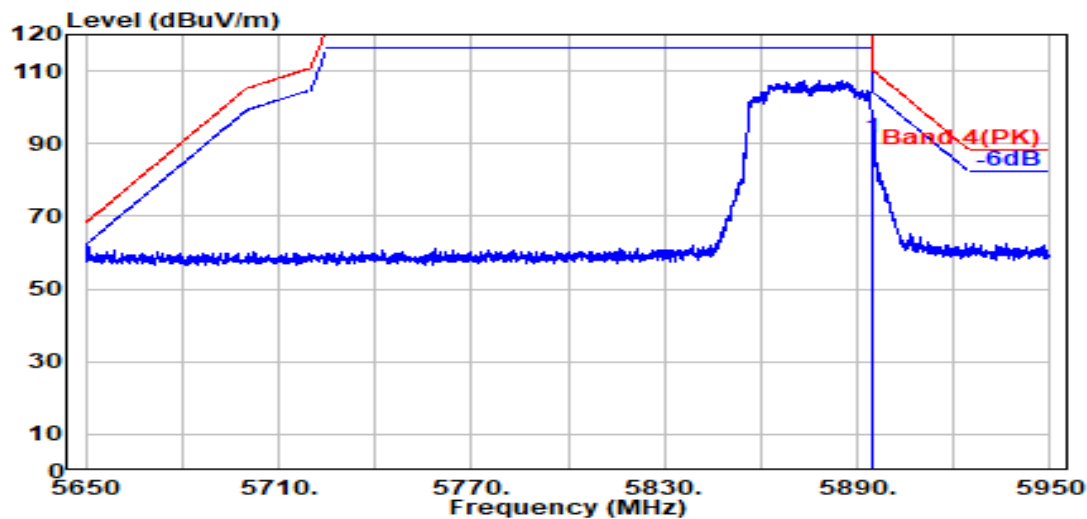

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	82.76	91.49	110.20	18.71	Peak

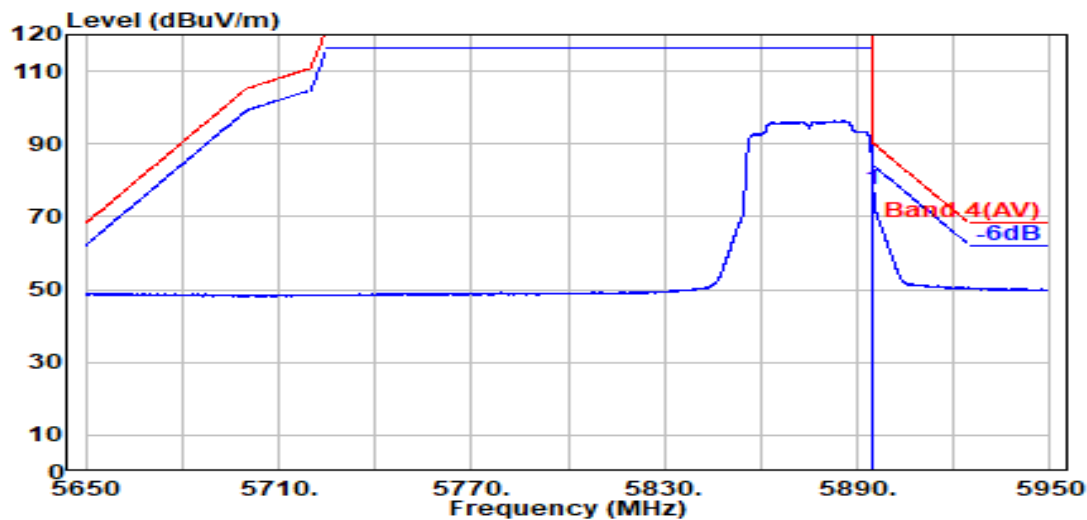

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	68.79	77.51	90.20	12.69	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

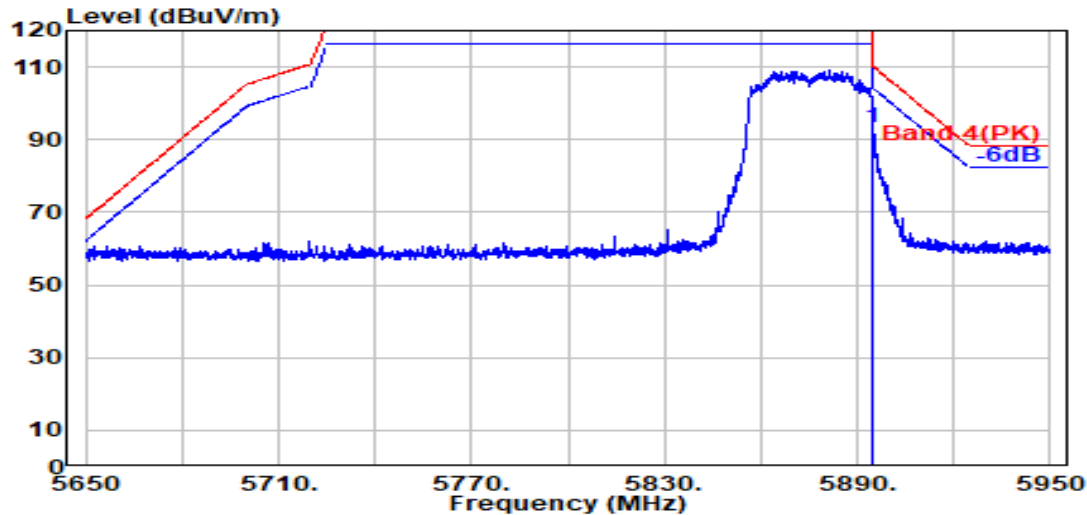

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	84.76	93.48	110.20	16.72	Peak

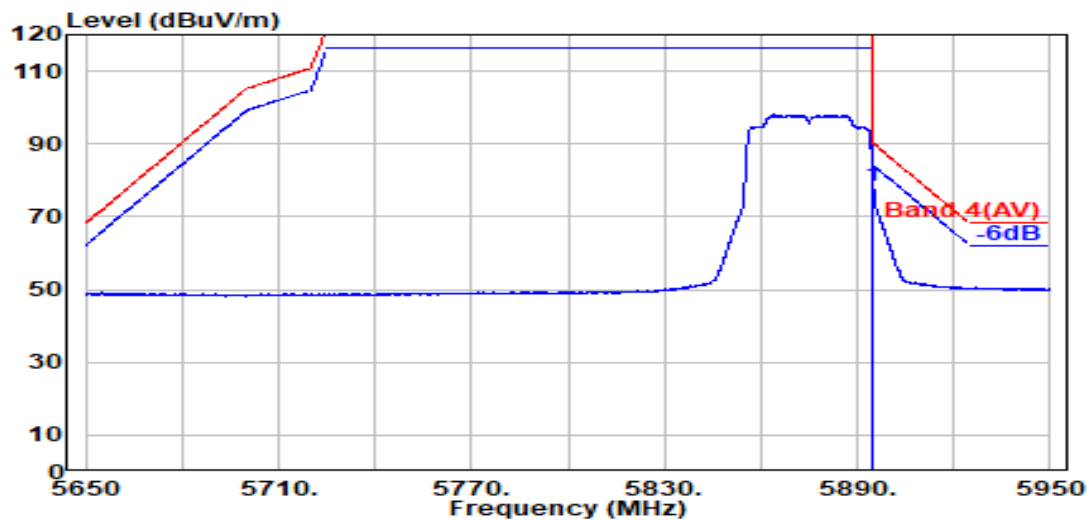

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	69.80	78.52	90.20	11.68	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

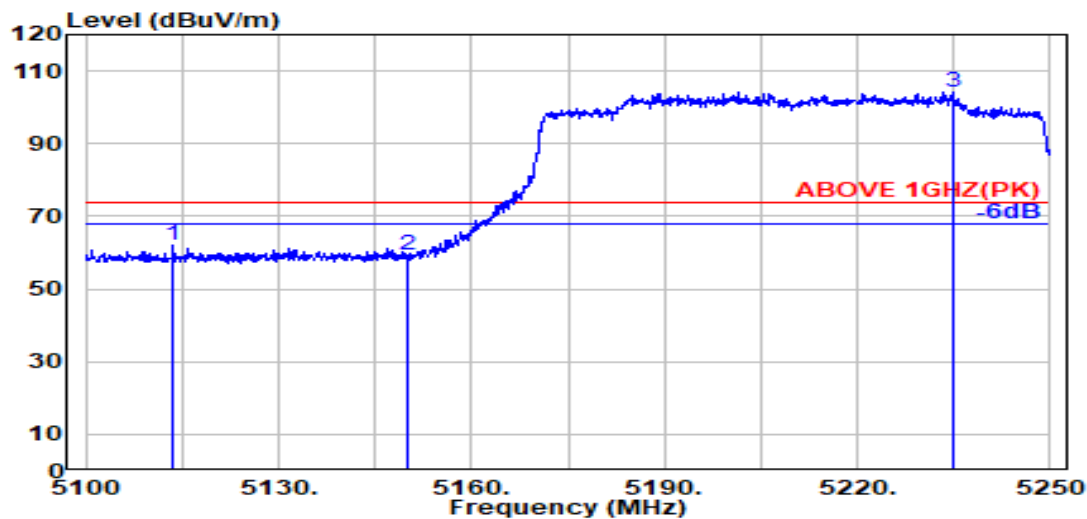

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.700	33.70	8.52	34.29	54.15	62.08	74.00	11.92	Peak
5150.000	33.70	8.54	34.28	51.43	59.40	74.00	14.60	Peak
@ 5234.800	33.77	8.60	34.25	96.16	104.27	---	---	Peak

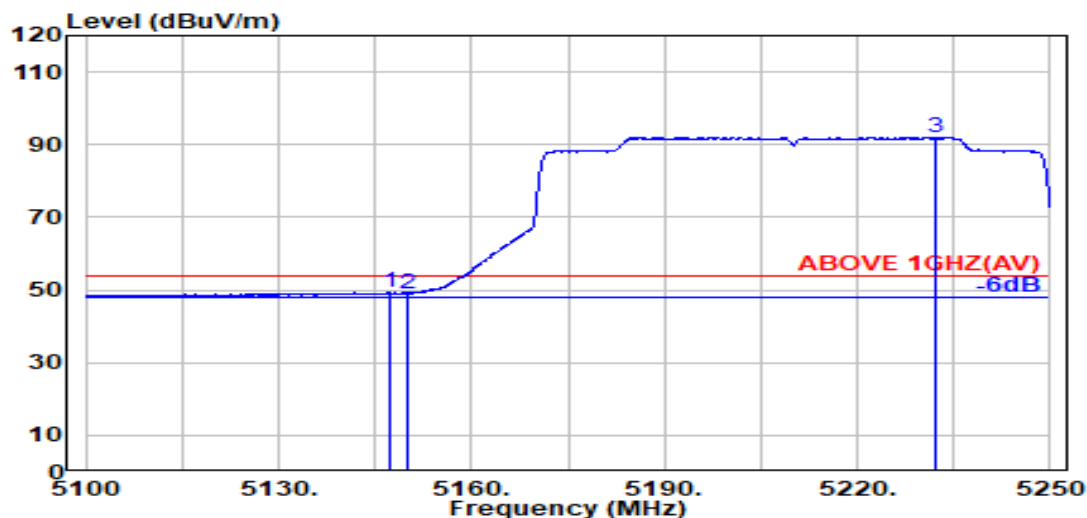

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.70	8.54	34.28	41.37	49.33	54.00	4.67	Average
5150.000	33.70	8.54	34.28	41.06	49.02	54.00	4.98	Average
@ 5232.000	33.76	8.59	34.25	83.89	92.00	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

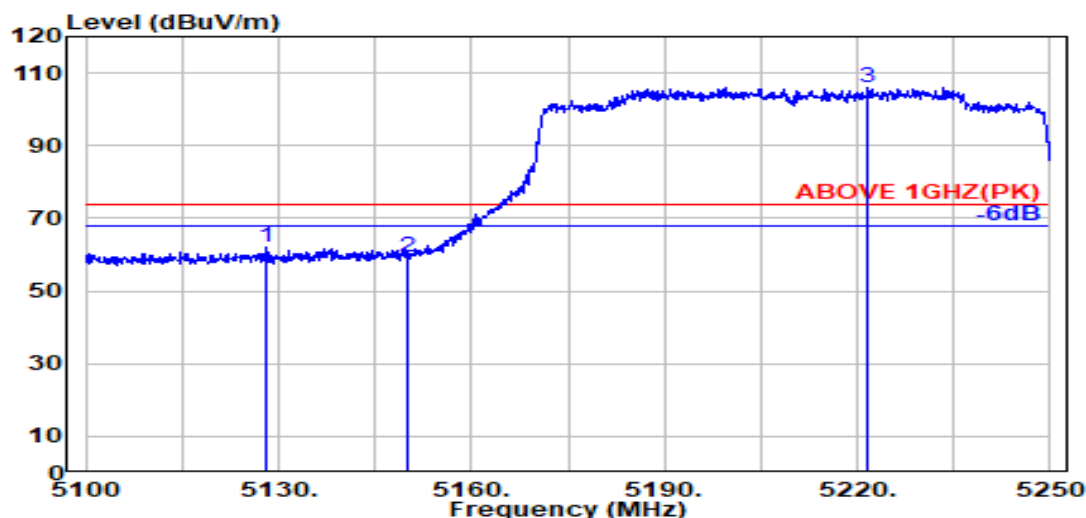

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.000	33.70	8.53	34.29	53.89	61.83	74.00	12.17	Peak
5150.000	33.70	8.54	34.28	51.44	59.40	74.00	14.60	Peak
@ 5221.700	33.74	8.59	34.26	97.88	105.95	---	---	Peak

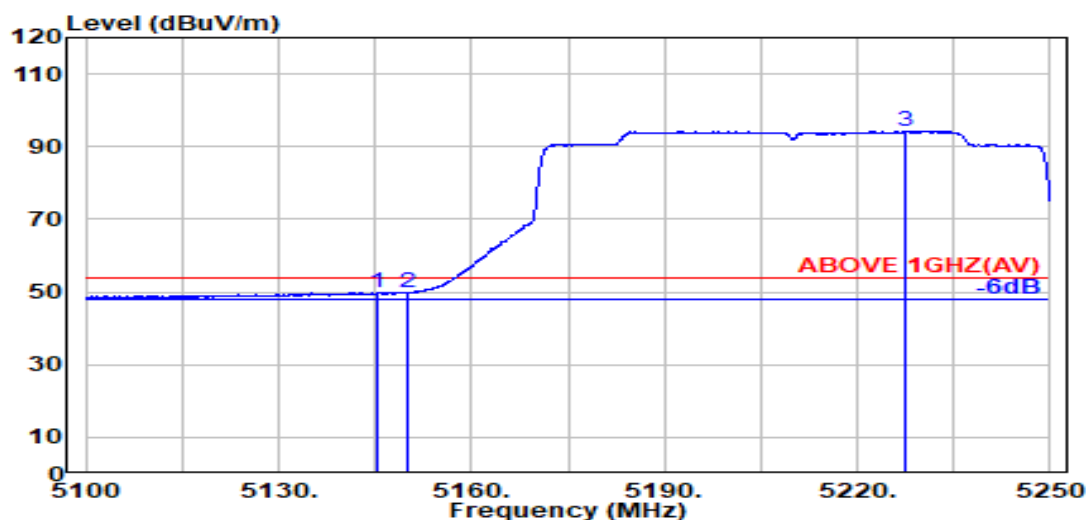

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.70	8.54	34.28	41.84	49.79	54.00	4.21	Average
5150.000	33.70	8.54	34.28	41.76	49.73	54.00	4.27	Average
@ 5227.600	33.76	8.59	34.26	86.18	94.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

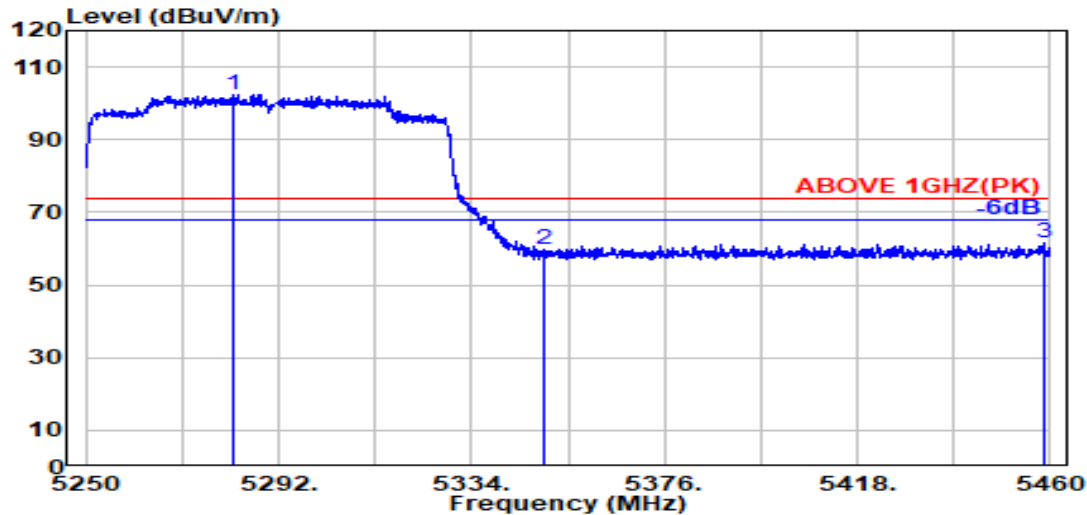

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.900	33.99	8.62	34.24	94.05	102.43	---	---	Peak
5350.000	33.90	8.67	34.22	51.47	59.82	74.00	14.18	Peak
5458.900	34.18	8.73	34.18	52.92	61.64	74.00	12.36	Peak

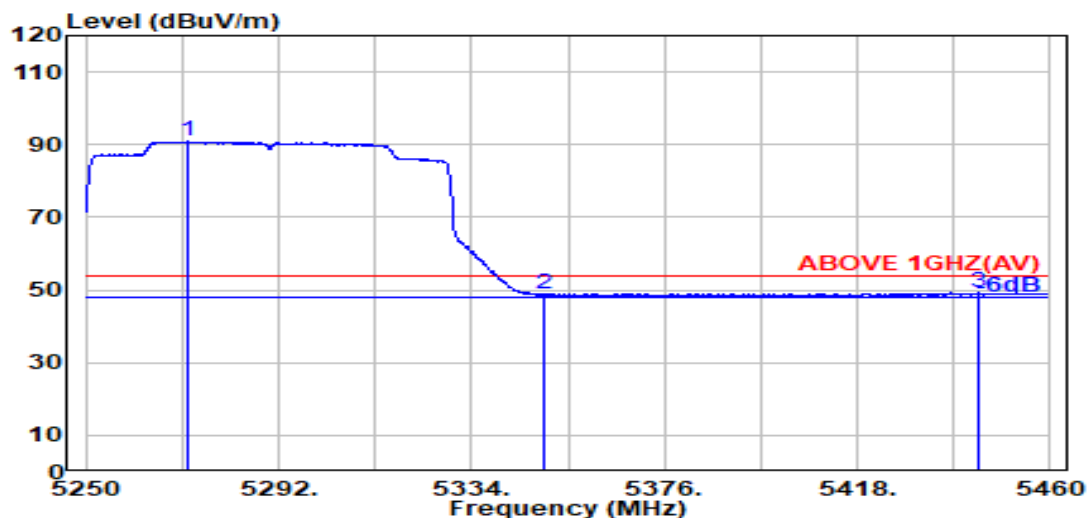

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.200	33.93	8.62	34.24	82.50	90.81	---	---	Average
5350.000	33.90	8.67	34.22	40.38	48.73	54.00	5.27	Average
5444.500	34.19	8.72	34.19	40.47	49.19	54.00	4.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

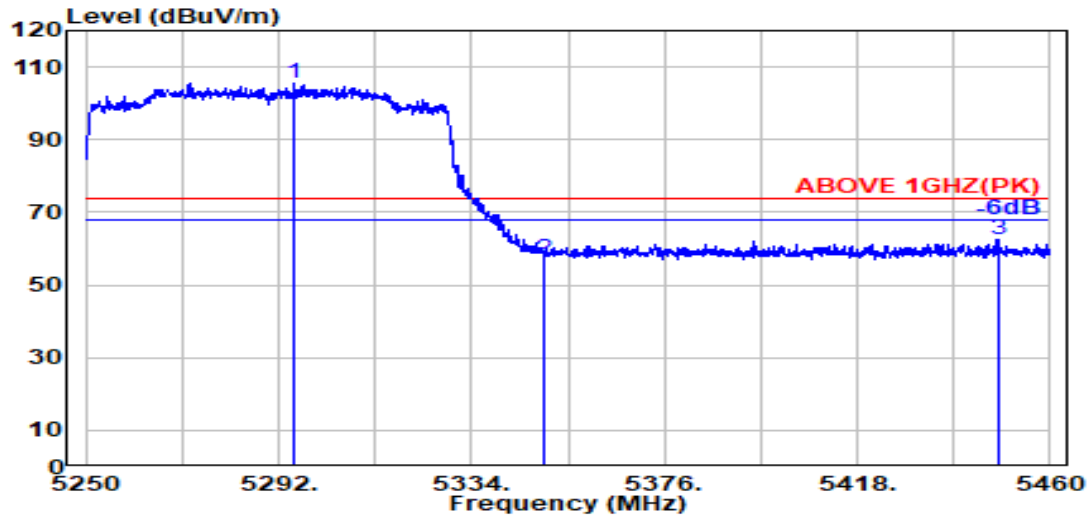

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5295.500	34.07	8.63	34.23	97.07	105.54	---	---	Peak
5350.000	33.90	8.67	34.22	48.92	57.27	74.00	16.73	Peak
5448.600	34.20	8.72	34.19	53.61	62.34	74.00	11.66	Peak

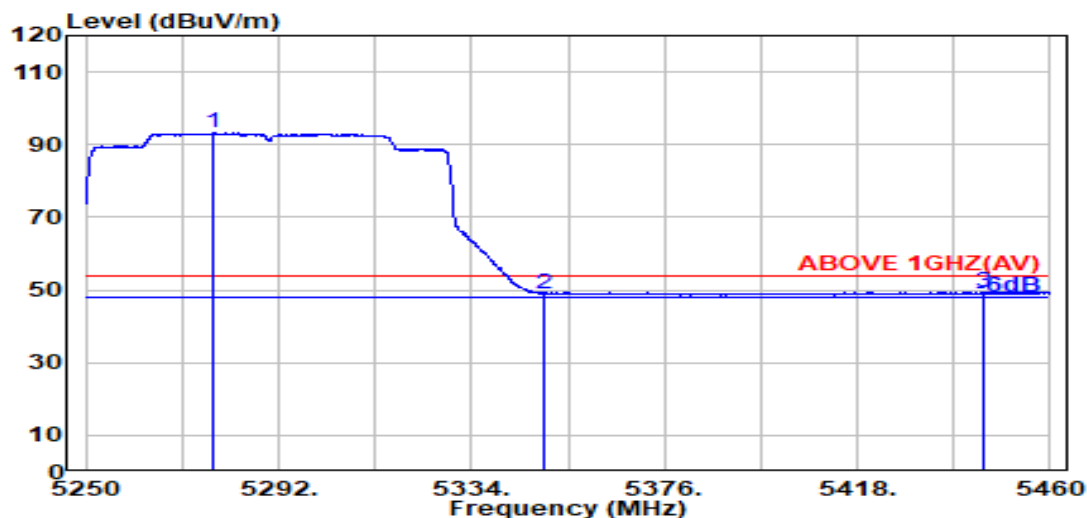

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.500	33.97	8.62	34.24	84.80	93.15	---	---	Average
5350.000	33.90	8.67	34.22	40.78	49.13	54.00	4.87	Average
5445.300	34.19	8.72	34.19	40.79	49.52	54.00	4.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

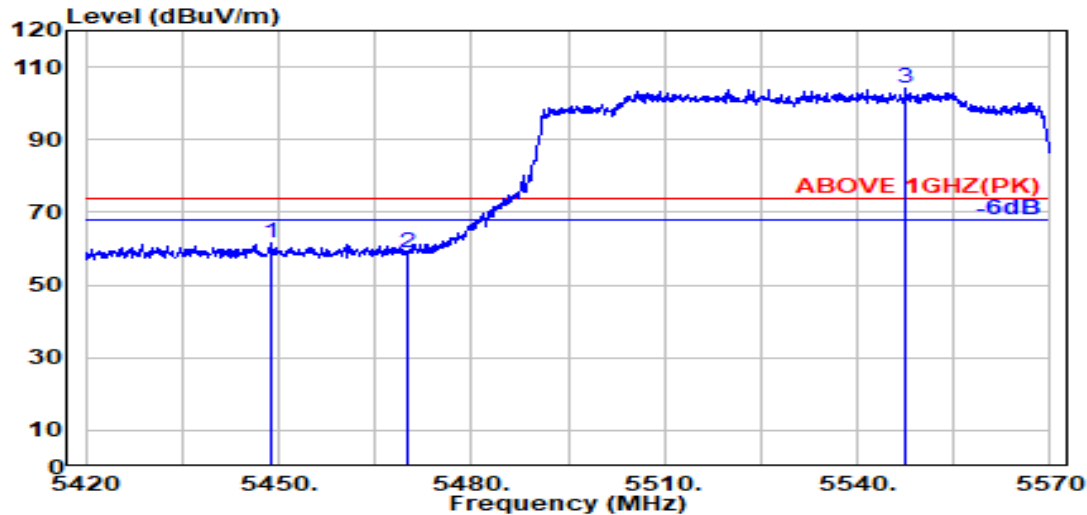

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.000	34.20	8.72	34.19	52.78	61.51	74.00	12.49	Peak
5470.000	34.16	8.74	34.18	50.15	58.87	74.00	15.13	Peak
@ 5547.400	34.10	8.78	34.19	95.34	104.03	---	---	Peak

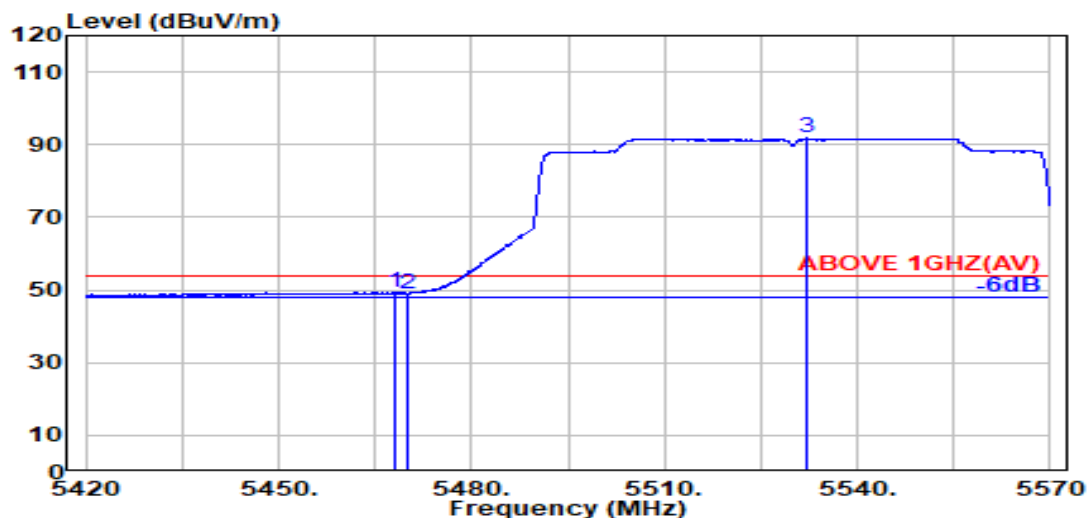

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.16	8.73	34.18	40.62	49.34	54.00	4.66	Average
5470.000	34.16	8.74	34.18	40.41	49.13	54.00	4.87	Average
@ 5532.100	34.10	8.77	34.19	83.07	91.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

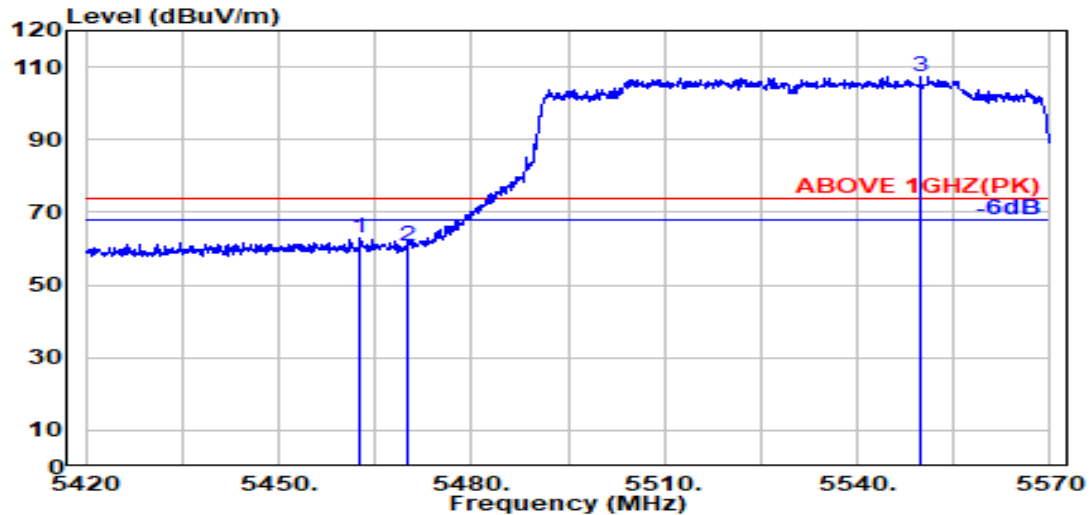

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.600	34.17	8.73	34.18	54.08	62.80	74.00	11.20	Peak
5470.000	34.16	8.74	34.18	52.16	60.88	74.00	13.12	Peak
@ 5549.900	34.10	8.78	34.19	98.73	107.42	---	---	Peak

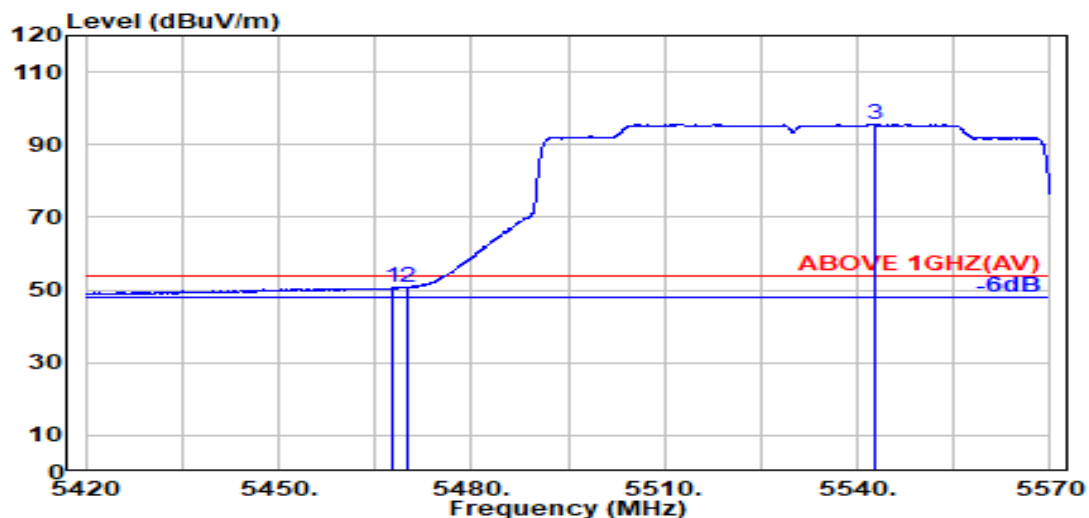

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.16	8.73	34.18	41.90	50.62	54.00	3.38	Average
5470.000	34.16	8.74	34.18	41.98	50.70	54.00	3.30	Average
@ 5542.600	34.10	8.78	34.19	87.02	95.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

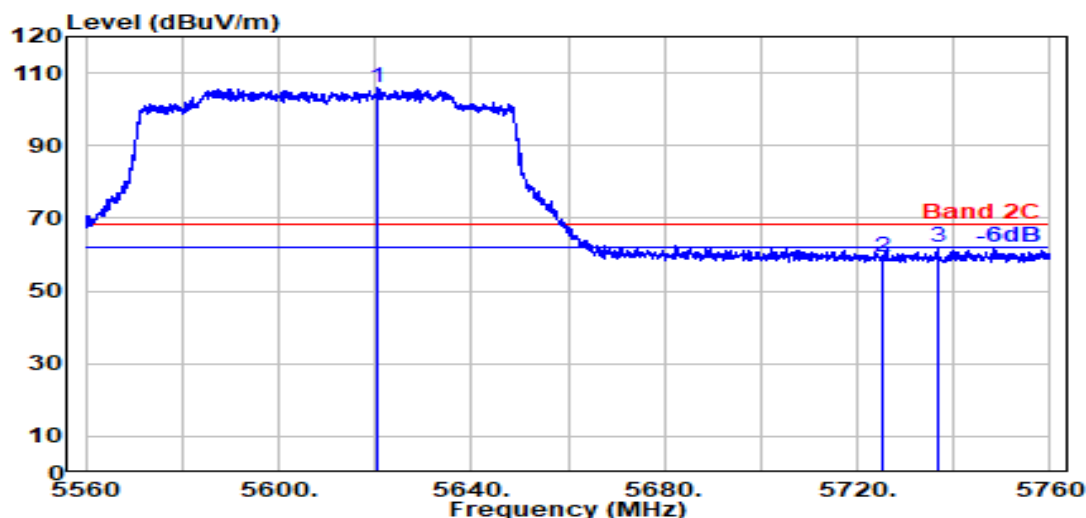

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5620.700	34.00	8.82	34.23	97.28	105.87	---	---	Peak
5725.000	33.80	8.88	34.28	50.71	59.11	68.20	9.09	Peak
5736.600	33.80	8.89	34.28	53.60	62.00	68.20	6.20	Peak

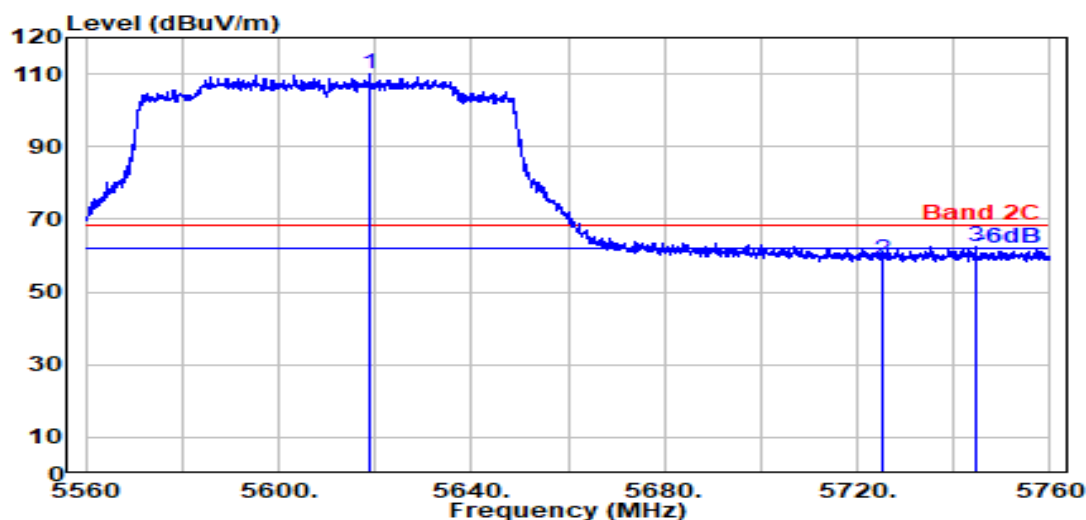

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.900	34.00	8.82	34.23	101.25	109.84	---	---	Peak
5725.000	33.80	8.88	34.28	50.67	59.08	68.20	9.12	Peak
5744.500	33.80	8.89	34.28	54.10	62.50	68.20	5.70	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

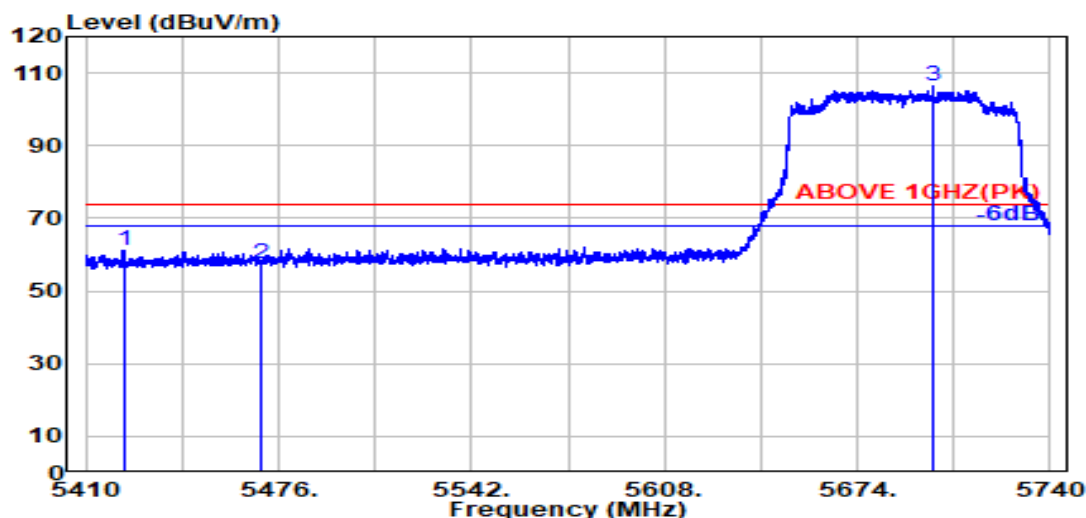

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.900	34.15	8.71	34.19	52.56	61.22	74.00	12.78	Peak
5470.000	34.16	8.74	34.18	48.69	57.40	74.00	16.60	Peak
@ 5699.800	33.80	8.87	34.26	97.88	106.28	---	---	Peak

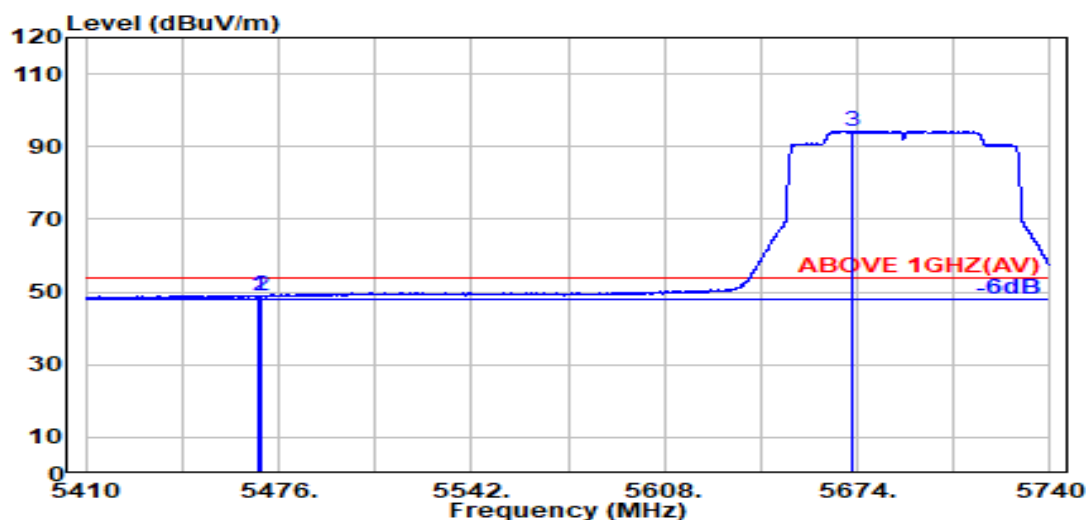

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	40.33	49.05	54.00	4.95	Average
5470.000	34.16	8.74	34.18	40.11	48.83	54.00	5.17	Average
@ 5672.200	33.91	8.85	34.25	85.79	94.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

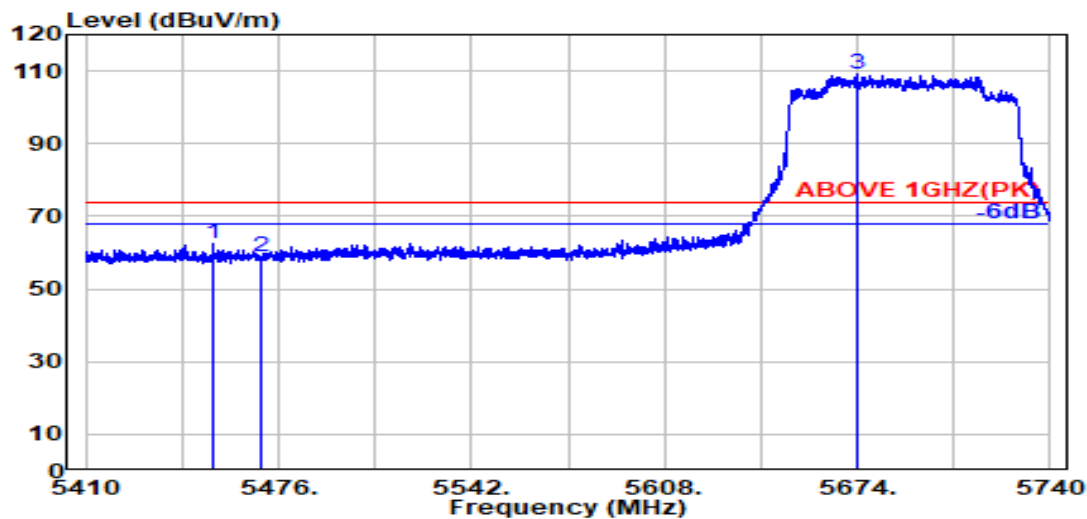

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.400	34.19	8.73	34.18	53.80	62.54	74.00	11.46	Peak
5470.000	34.16	8.74	34.18	50.05	58.77	74.00	15.23	Peak
@ 5674.000	33.90	8.85	34.25	100.81	109.31	---	---	Peak

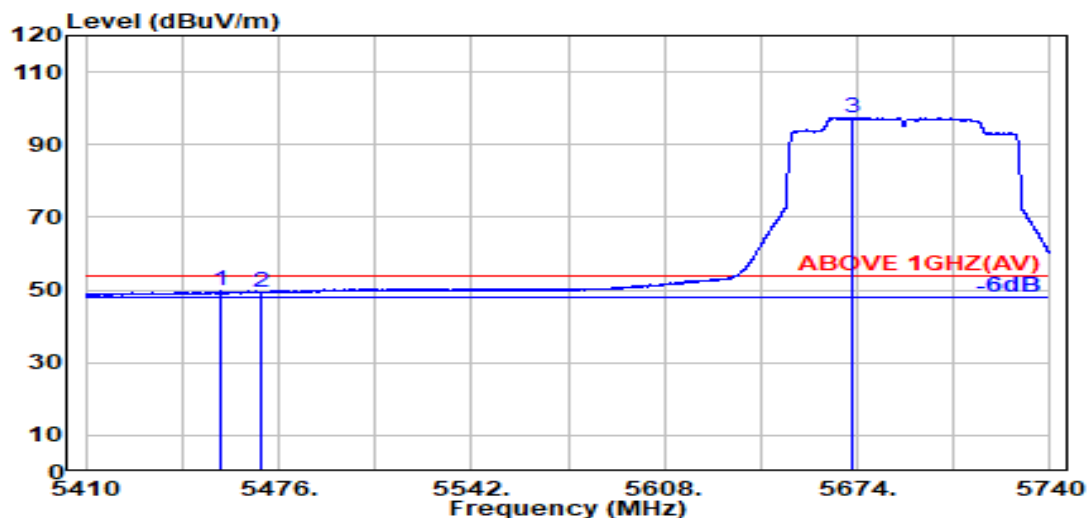

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.400	34.19	8.73	34.18	40.90	49.63	54.00	4.37	Average
5470.000	34.16	8.74	34.18	40.79	49.50	54.00	4.50	Average
@ 5672.600	33.91	8.85	34.25	88.96	97.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

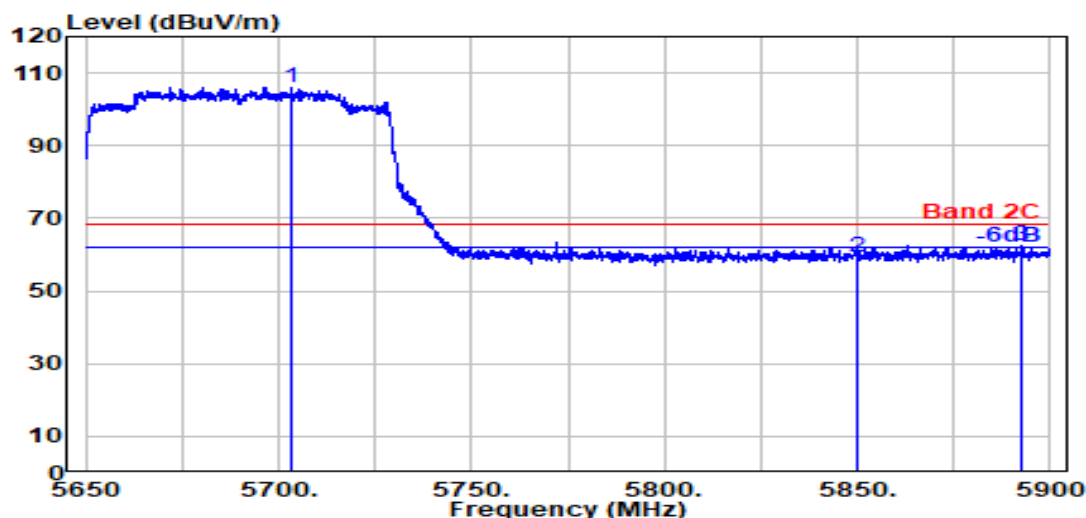

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.300	33.80	8.87	34.27	97.39	105.80	---	---	Peak
5850.000	34.10	8.95	34.33	50.55	59.27	68.20	8.93	Peak
5892.600	34.10	8.97	34.35	53.79	62.51	68.20	5.69	Peak

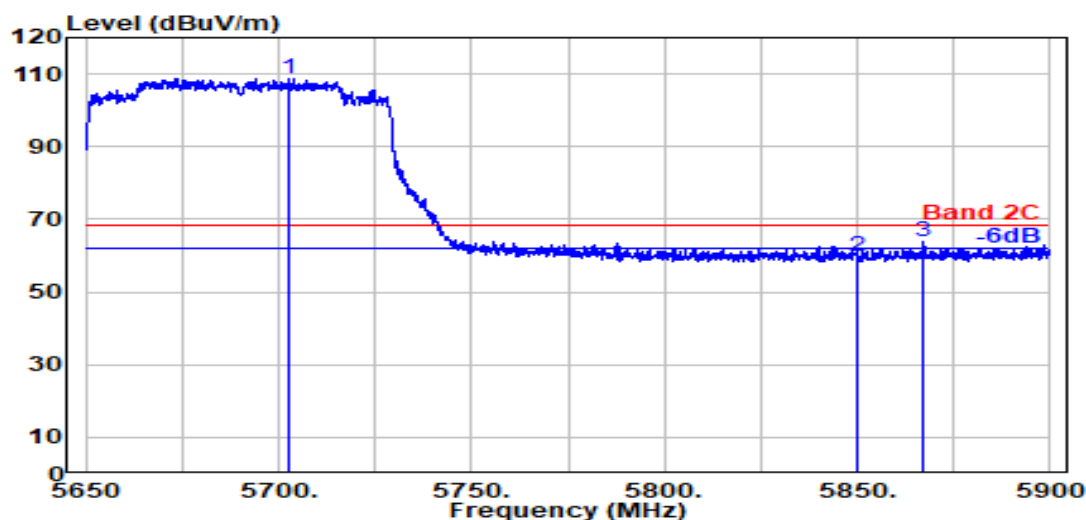

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.400	33.80	8.87	34.27	100.31	108.71	---	---	Peak
5850.000	34.10	8.95	34.33	51.20	59.91	68.20	8.29	Peak
5867.300	34.10	8.96	34.34	54.98	63.69	68.20	4.51	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

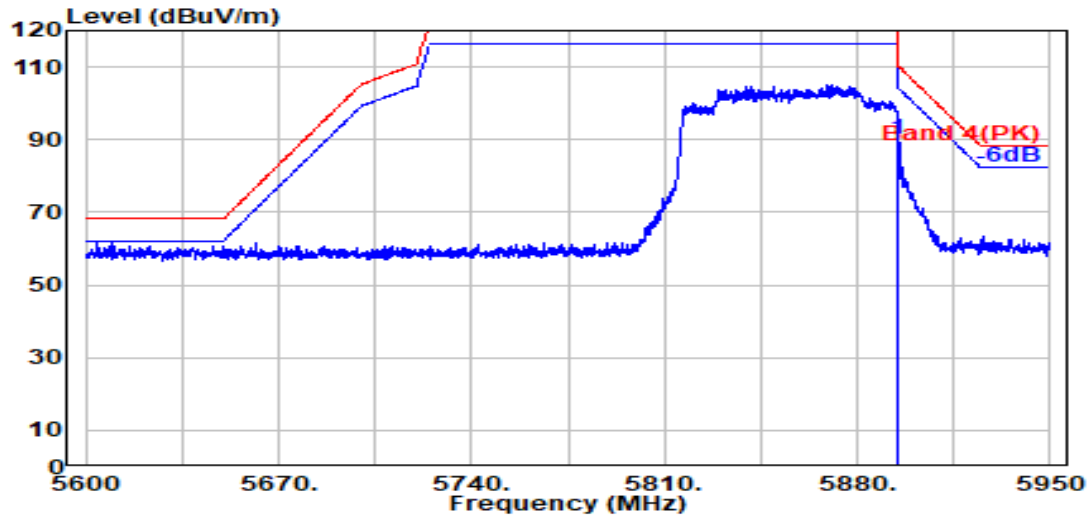

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	81.49	90.21	110.16	19.95	Peak

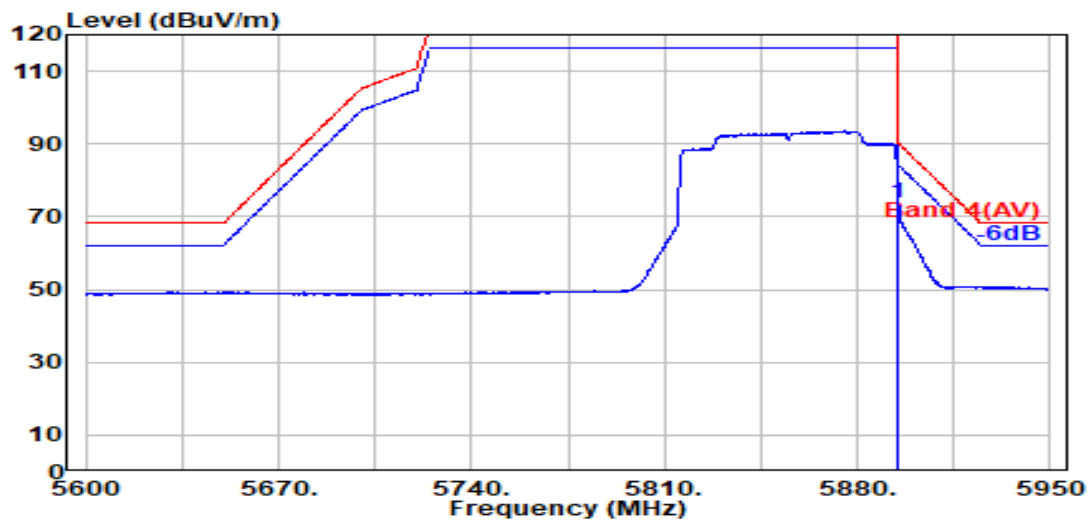

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	65.05	73.77	90.16	16.39	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

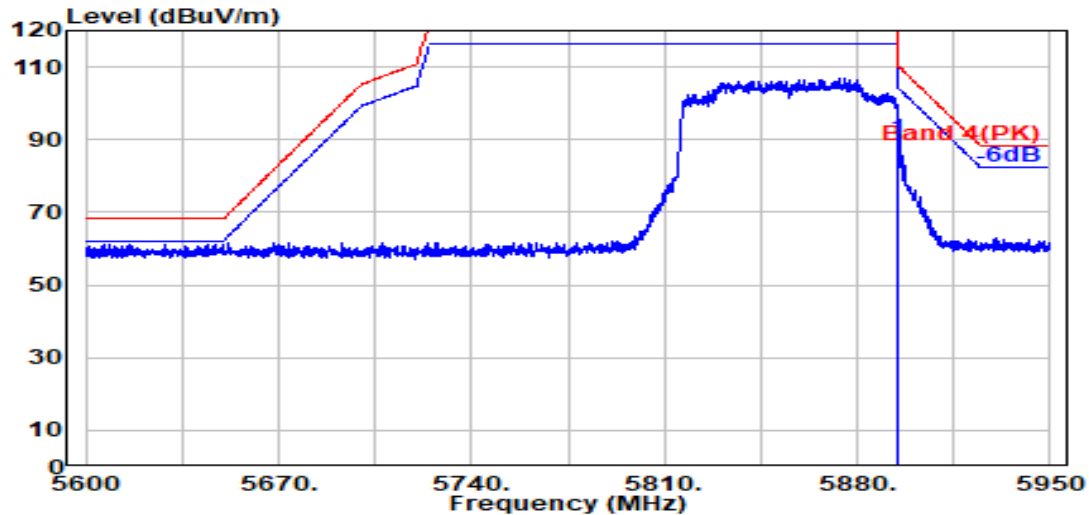

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	81.18	89.90	110.16	20.26	Peak

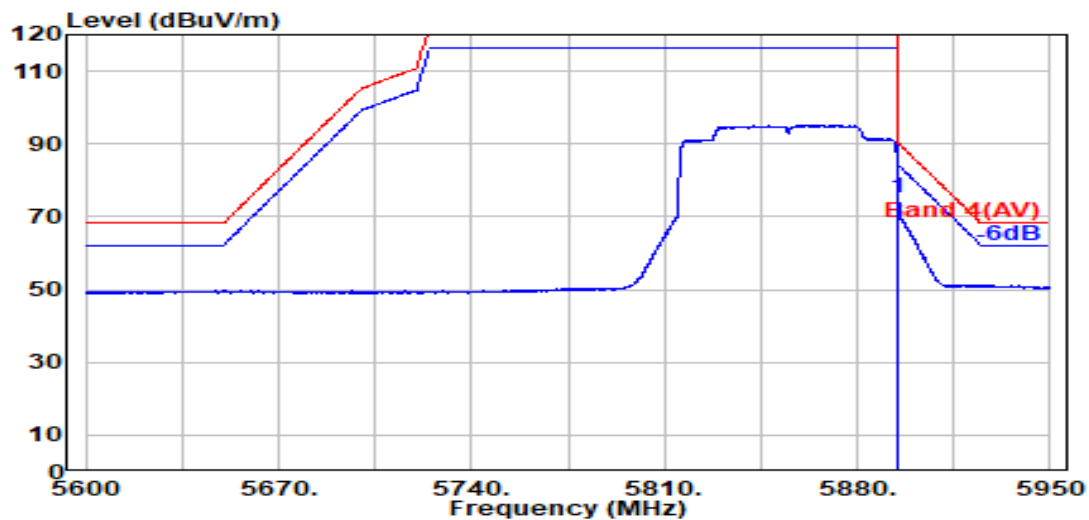

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	66.46	75.18	90.16	14.99	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

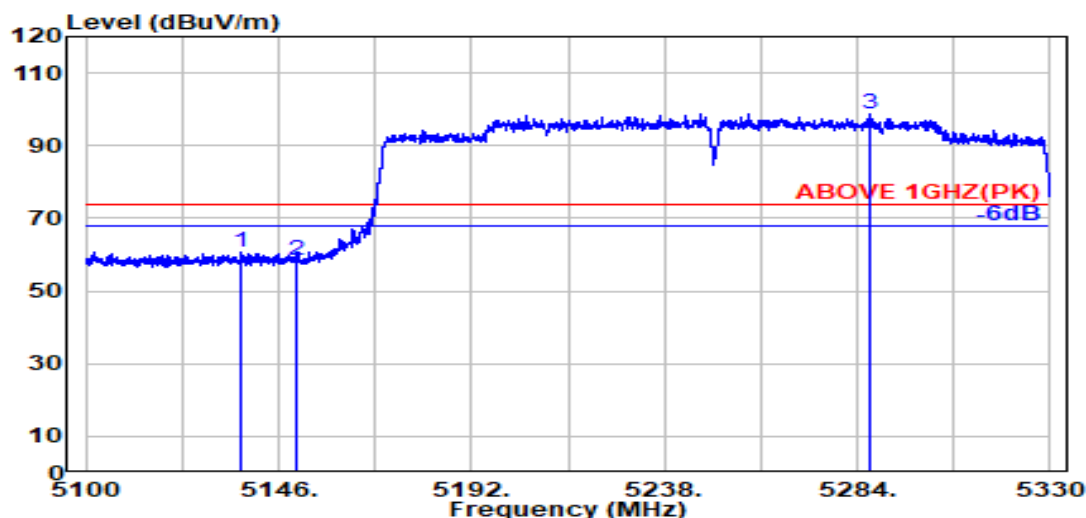

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.200	33.70	8.54	34.28	52.92	60.87	74.00	13.13	Peak
5150.000	33.70	8.54	34.28	50.56	58.52	74.00	15.48	Peak
@ 5287.300	34.02	8.63	34.24	90.30	98.72	---	---	Peak

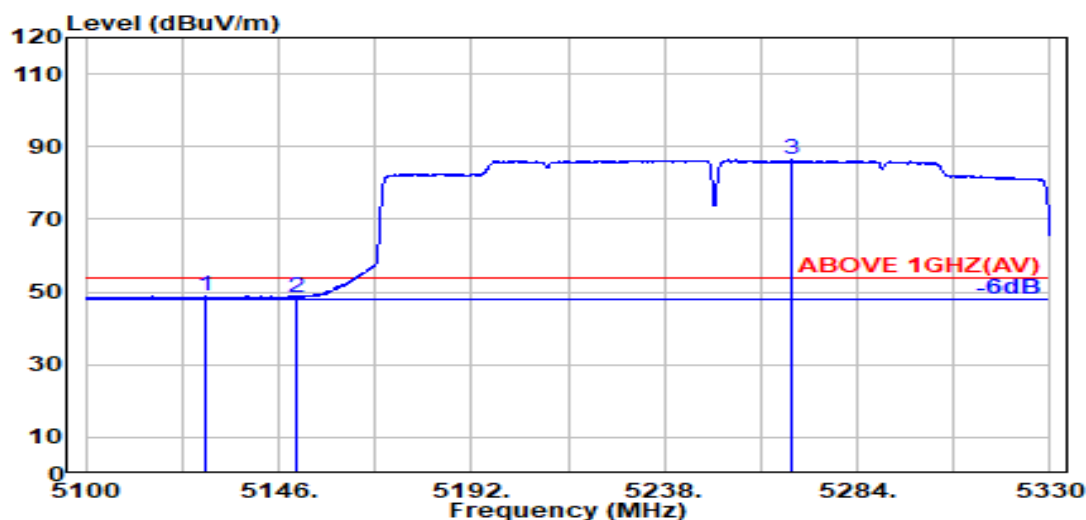

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.700	33.70	8.53	34.29	40.92	48.86	54.00	5.14	Average
5150.000	33.70	8.54	34.28	40.64	48.60	54.00	5.40	Average
@ 5268.600	33.91	8.62	34.24	78.04	86.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

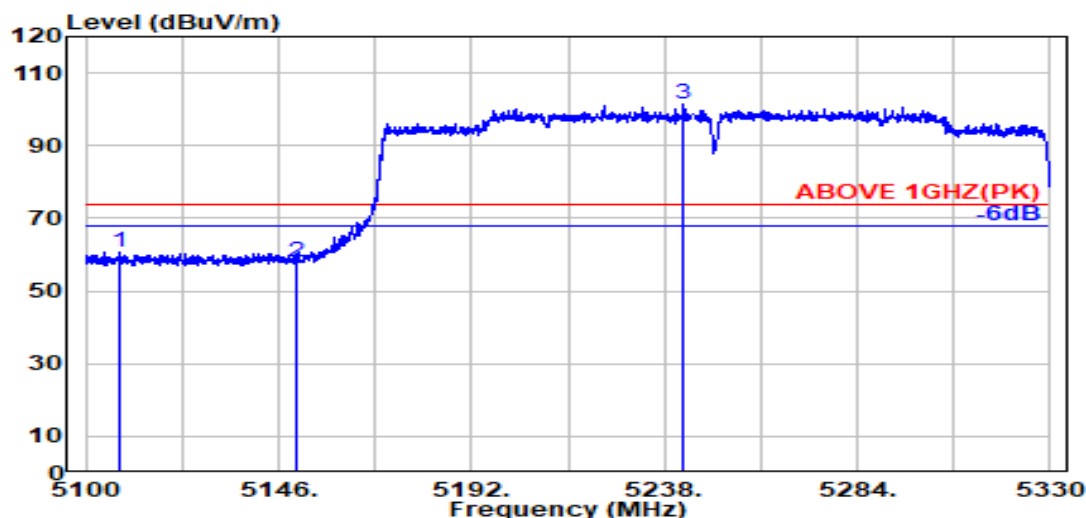

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.100	33.70	8.52	34.29	52.81	60.74	74.00	13.26	Peak
5150.000	33.70	8.54	34.28	50.10	58.06	74.00	15.94	Peak
@ 5242.700	33.79	8.60	34.25	93.36	101.50	---	---	Peak

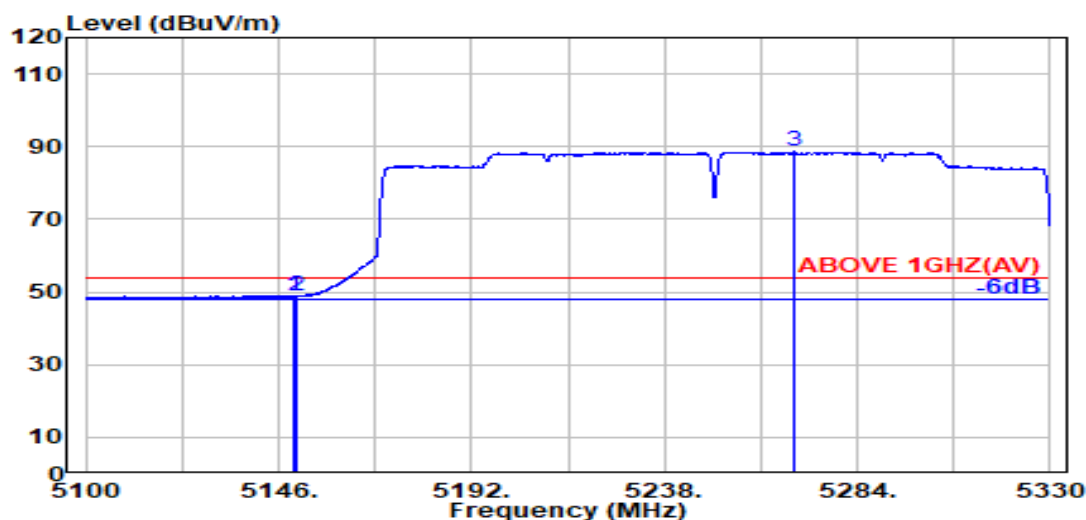

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.28	41.08	49.05	54.00	4.95	Average
5150.000	33.70	8.54	34.28	40.74	48.70	54.00	5.30	Average
@ 5268.700	33.91	8.62	34.24	80.25	88.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

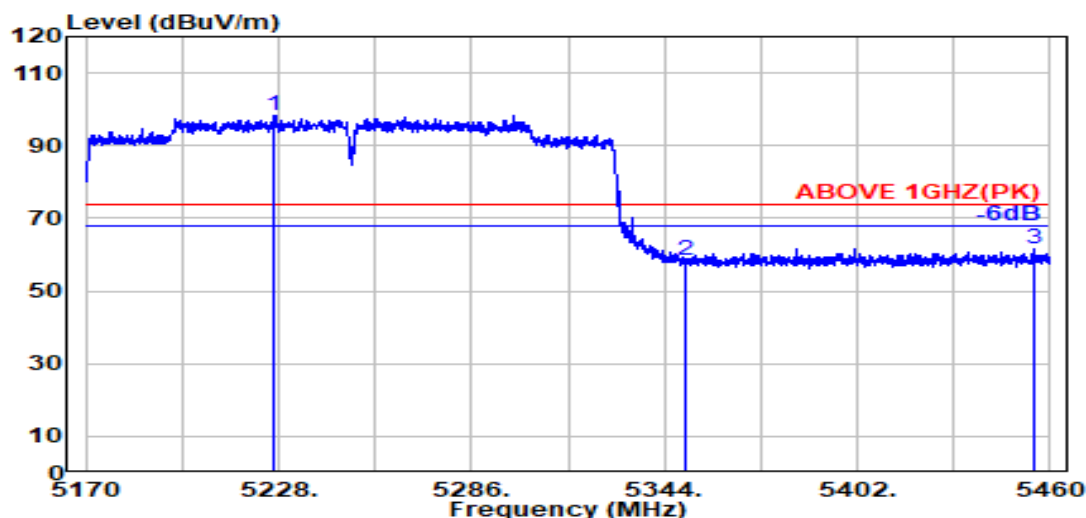

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5226.800	33.75	8.59	34.26	90.34	98.43	---	---	Peak
5350.000	33.90	8.67	34.22	49.95	58.30	74.00	15.70	Peak
5454.900	34.19	8.73	34.18	53.00	61.74	74.00	12.26	Peak

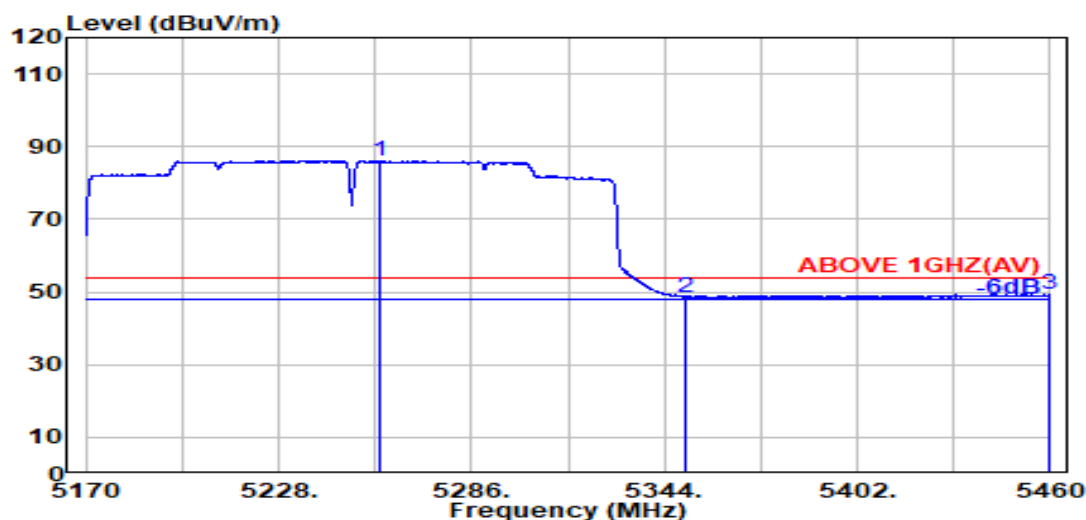

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5258.300	33.85	8.61	34.25	77.91	86.13	---	---	Average
5350.000	33.90	8.67	34.22	40.23	48.58	54.00	5.42	Average
5459.600	34.18	8.73	34.18	40.69	49.42	54.00	4.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

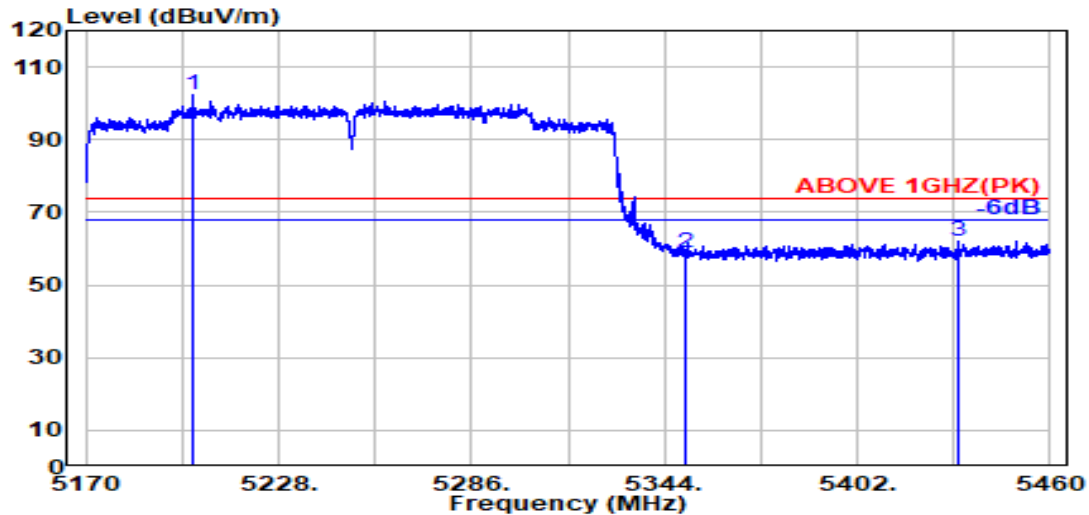

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5202.100	33.70	8.58	34.26	94.37	102.39	---	---	Peak
5350.000	33.90	8.67	34.22	50.66	59.01	74.00	14.99	Peak
5432.200	34.16	8.71	34.19	53.28	61.97	74.00	12.03	Peak

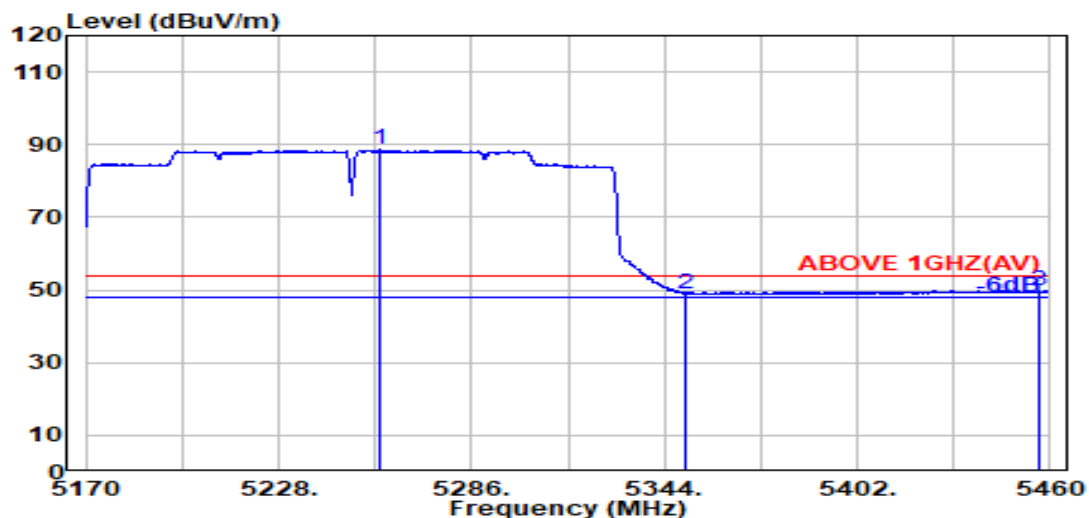

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5258.700	33.85	8.61	34.25	80.33	88.55	---	---	Average
5350.000	33.90	8.67	34.22	40.68	49.02	54.00	4.98	Average
5456.800	34.19	8.73	34.18	41.11	49.84	54.00	4.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

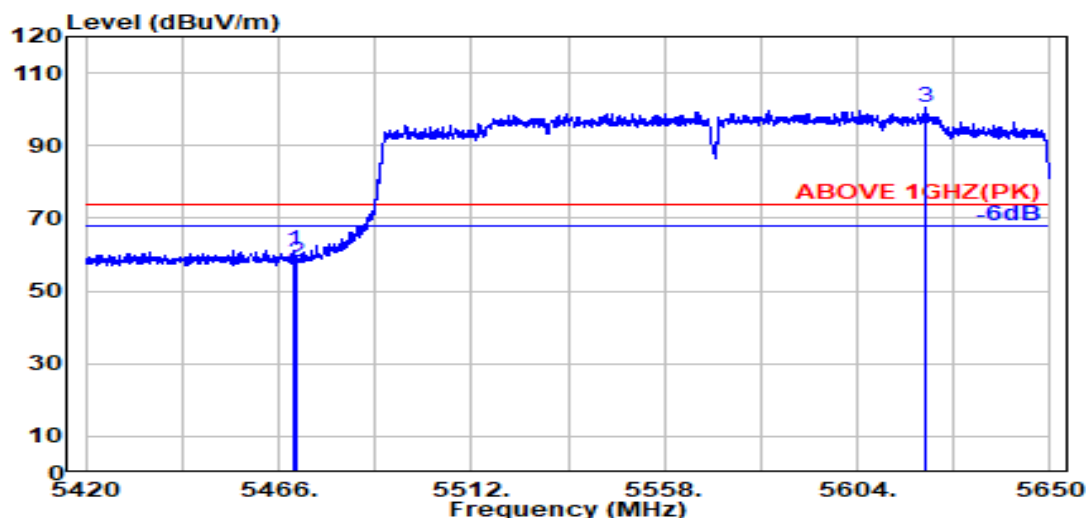

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.16	8.74	34.18	52.62	61.34	74.00	12.66	Peak
5470.000	34.16	8.74	34.18	49.17	57.88	74.00	16.12	Peak
@ 5620.500	34.00	8.82	34.23	91.83	100.43	---	---	Peak

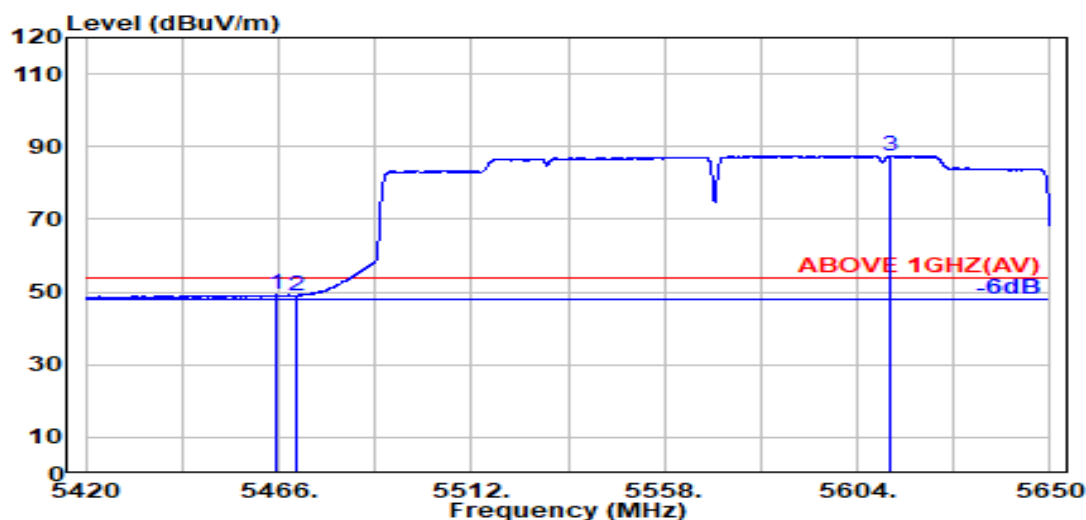

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.17	8.73	34.18	40.54	49.26	54.00	4.74	Average
5470.000	34.16	8.74	34.18	40.21	48.92	54.00	5.08	Average
@ 5611.700	34.00	8.82	34.22	78.95	87.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

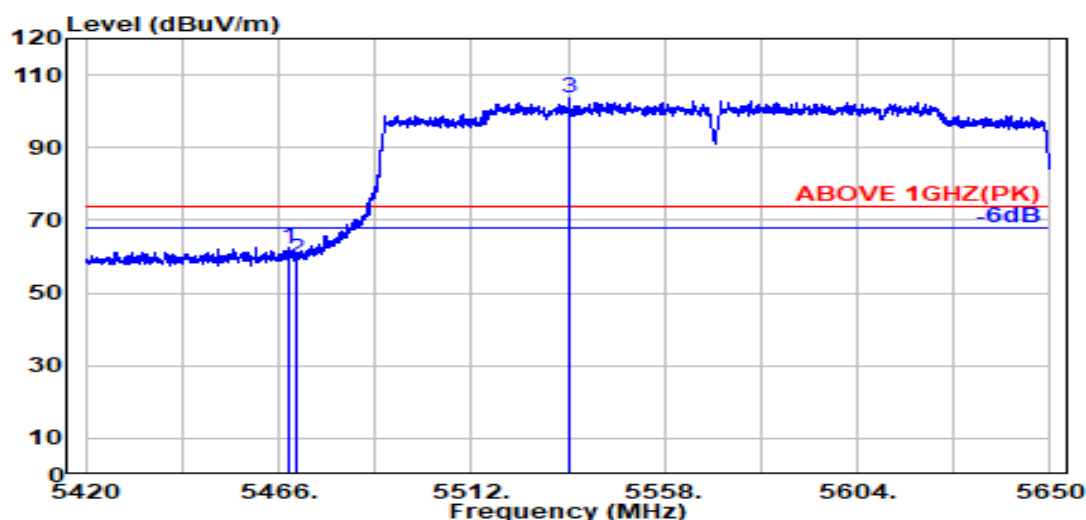

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	53.67	62.39	74.00	11.61	Peak
5470.000	34.16	8.74	34.18	50.44	59.16	74.00	14.84	Peak
@ 5535.300	34.10	8.77	34.19	95.03	103.72	---	---	Peak

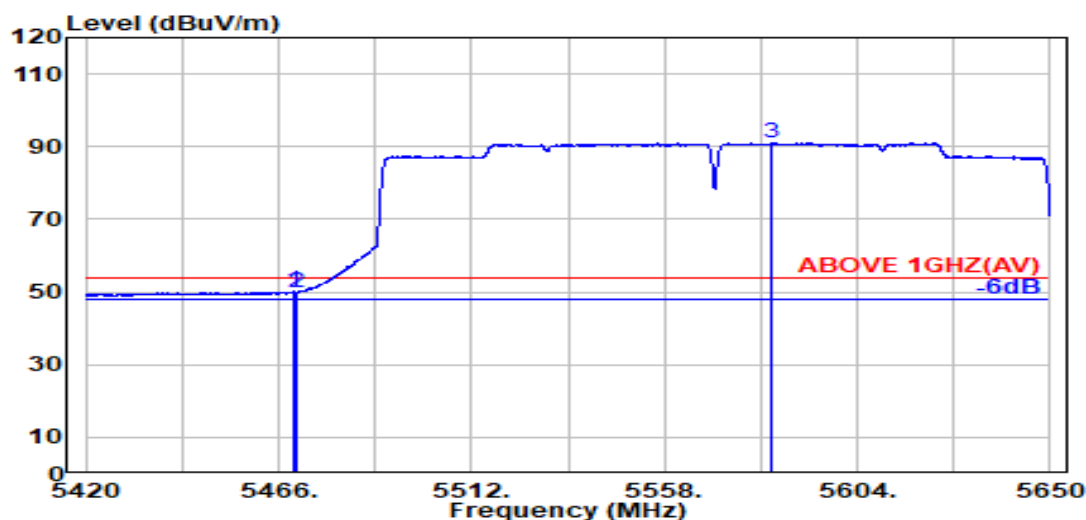

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.16	8.74	34.18	41.34	50.05	54.00	3.95	Average
5470.000	34.16	8.74	34.18	41.22	49.94	54.00	4.06	Average
@ 5583.700	34.03	8.80	34.21	82.32	90.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

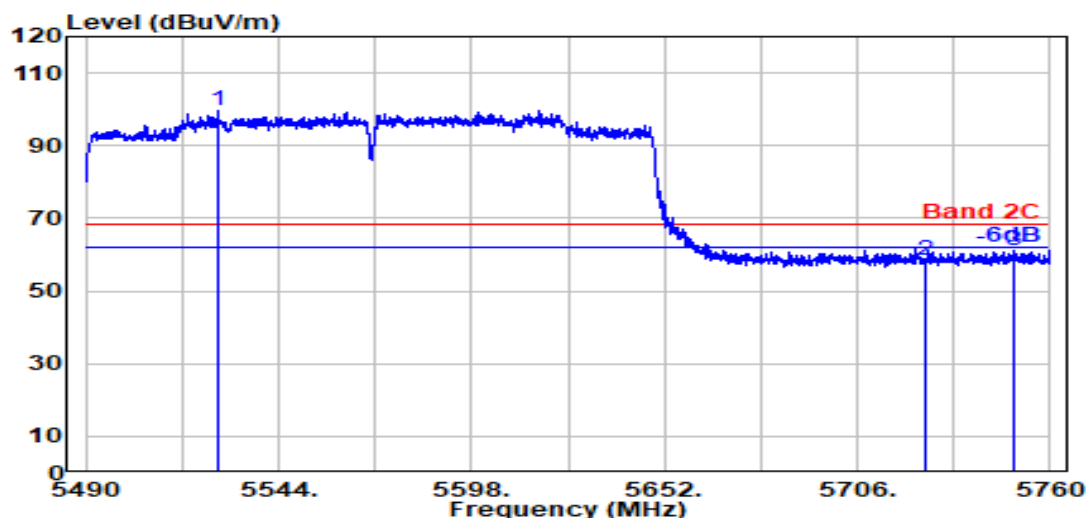

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5526.900	34.10	8.77	34.18	90.83	99.52	---	---	Peak
5725.000	33.80	8.88	34.28	49.93	58.34	68.20	9.86	Peak
5749.600	33.80	8.89	34.29	52.80	61.21	68.20	6.99	Peak

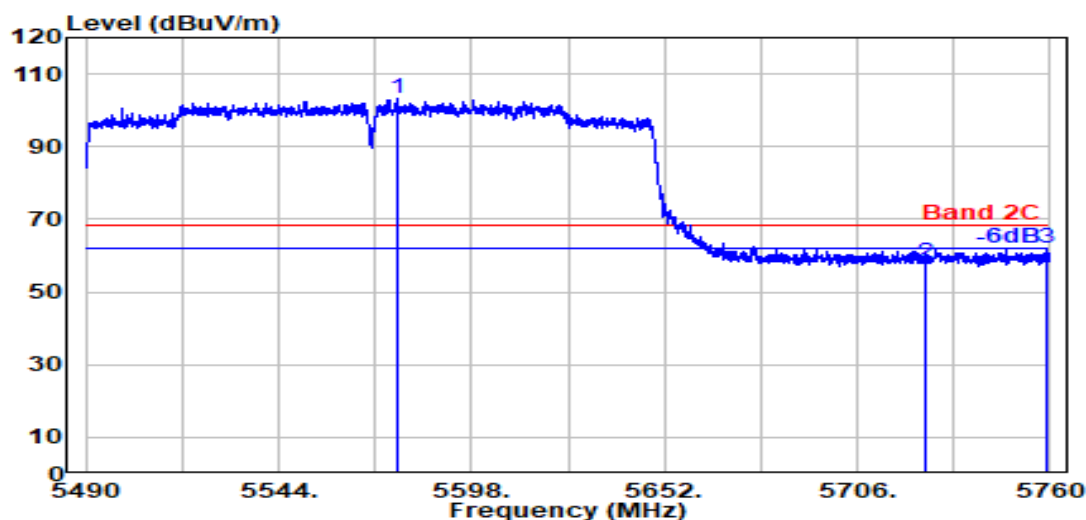

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5577.000	34.05	8.80	34.21	94.38	103.02	---	---	Peak
5725.000	33.80	8.88	34.28	49.59	58.00	68.20	10.20	Peak
5759.100	33.84	8.90	34.29	53.61	62.06	68.20	6.14	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

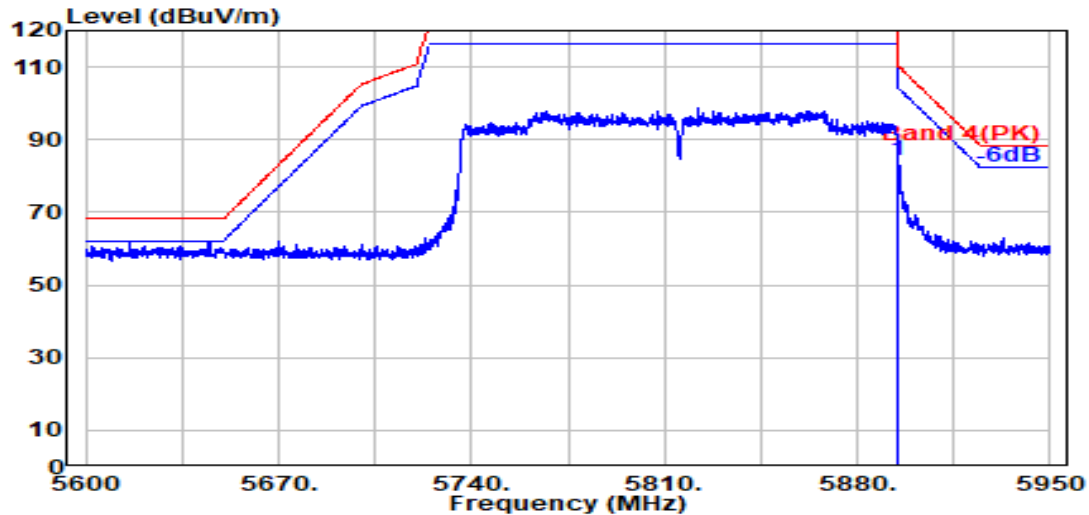

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	75.50	84.22	110.16	25.95	Peak

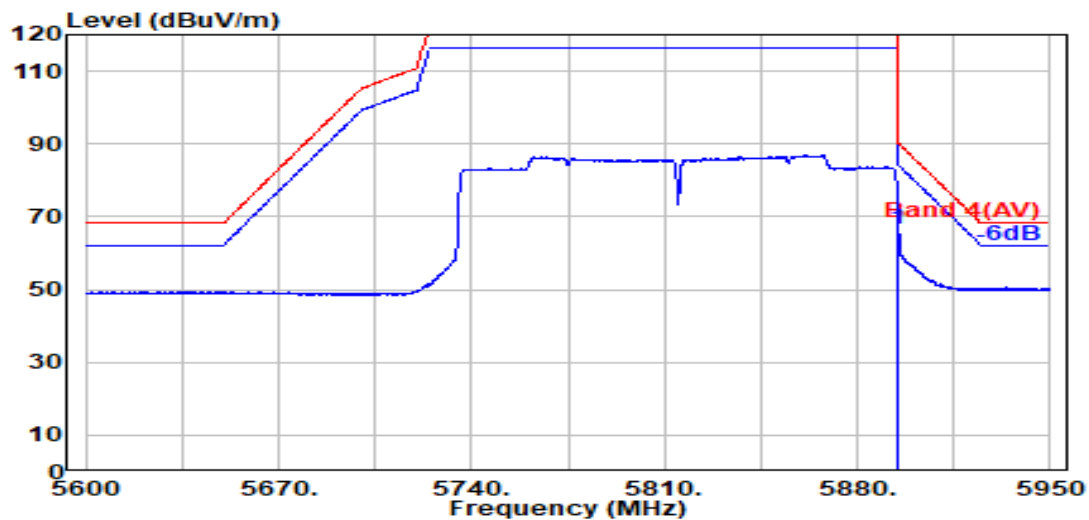

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	57.82	66.54	90.16	23.62	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

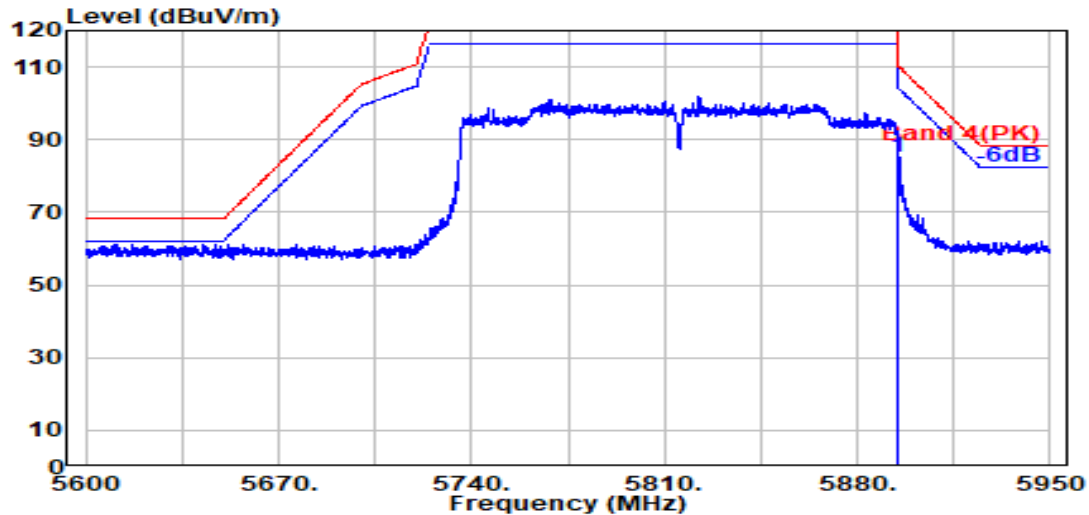

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.10	8.97	34.35	76.50	85.22	110.16	24.94	Peak

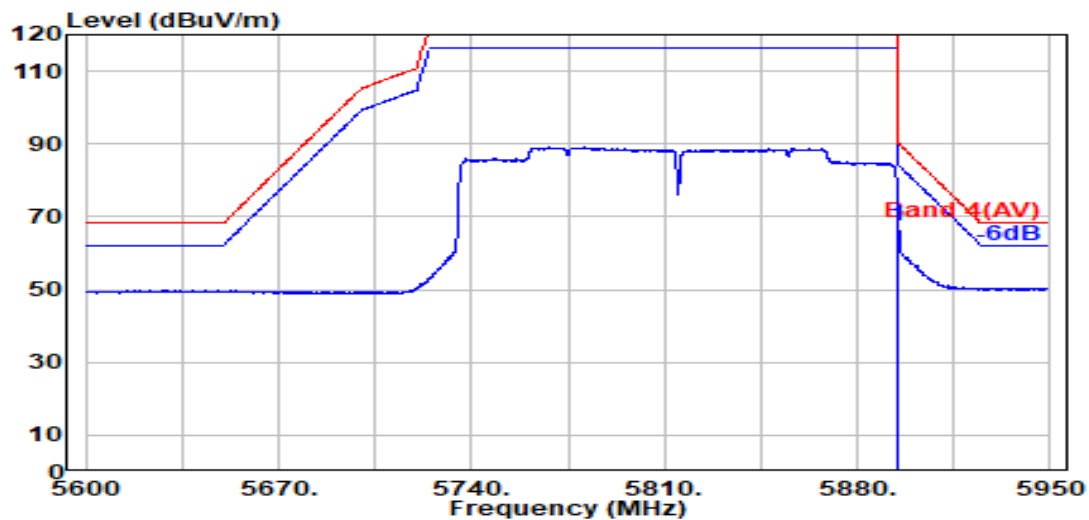

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.10	8.97	34.35	58.77	67.49	90.16	22.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

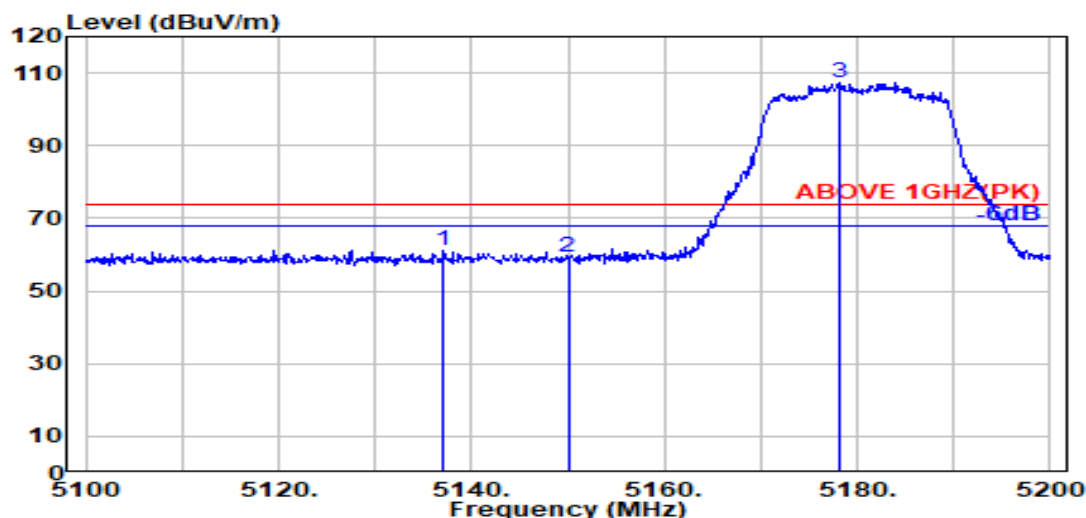

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.100	33.70	8.54	34.28	53.22	61.17	74.00	12.83	Peak
5150.000	33.70	8.54	34.28	51.26	59.22	74.00	14.78	Peak
@ 5178.100	33.70	8.56	34.27	99.52	107.51	---	---	Peak

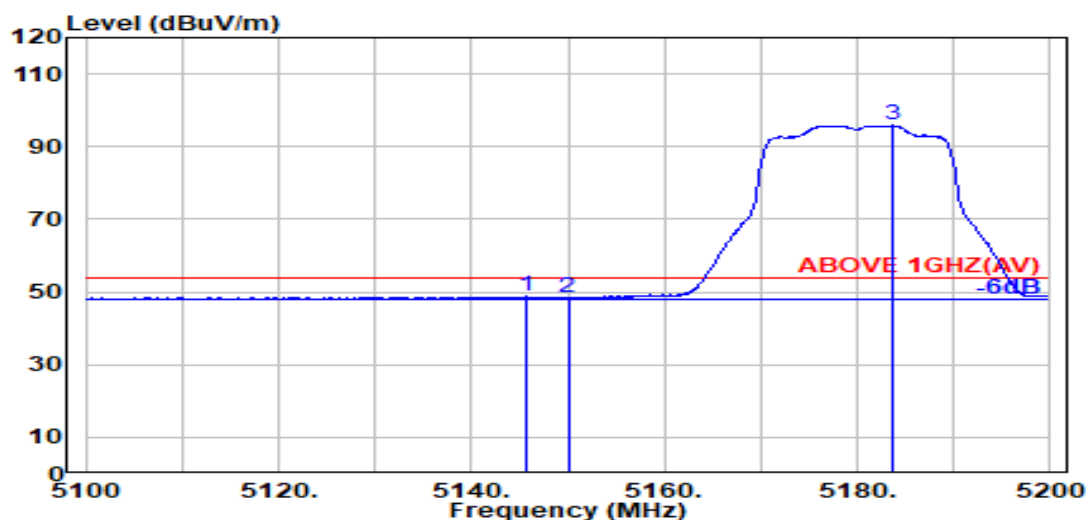

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	33.70	8.54	34.28	40.83	48.79	54.00	5.21	Average
5150.000	33.70	8.54	34.28	40.31	48.28	54.00	5.72	Average
@ 5183.600	33.70	8.56	34.27	87.84	95.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

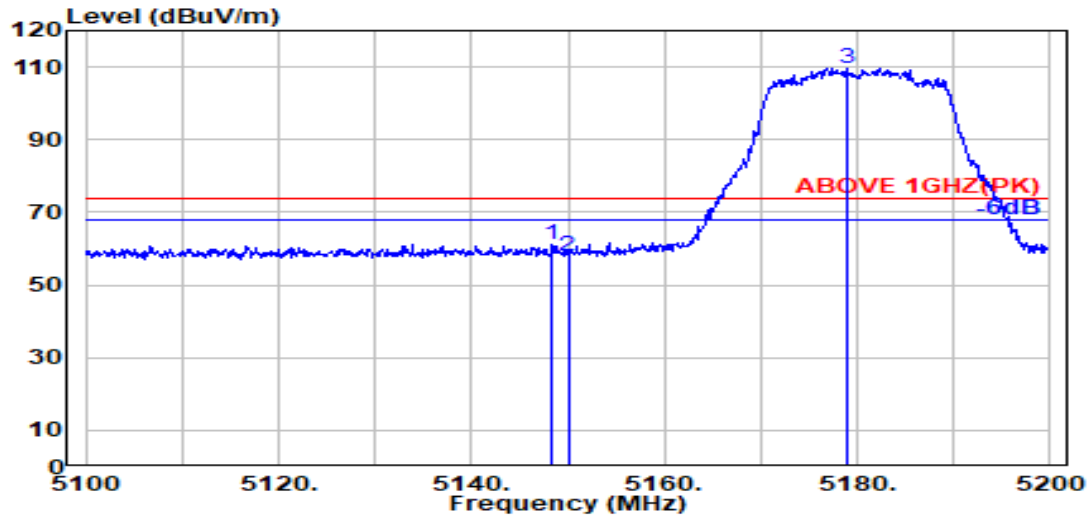

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.70	8.54	34.28	53.00	60.97	74.00	13.03	Peak
5150.000	33.70	8.54	34.28	50.14	58.10	74.00	15.90	Peak
@ 5179.000	33.70	8.56	34.27	101.74	109.74	---	---	Peak

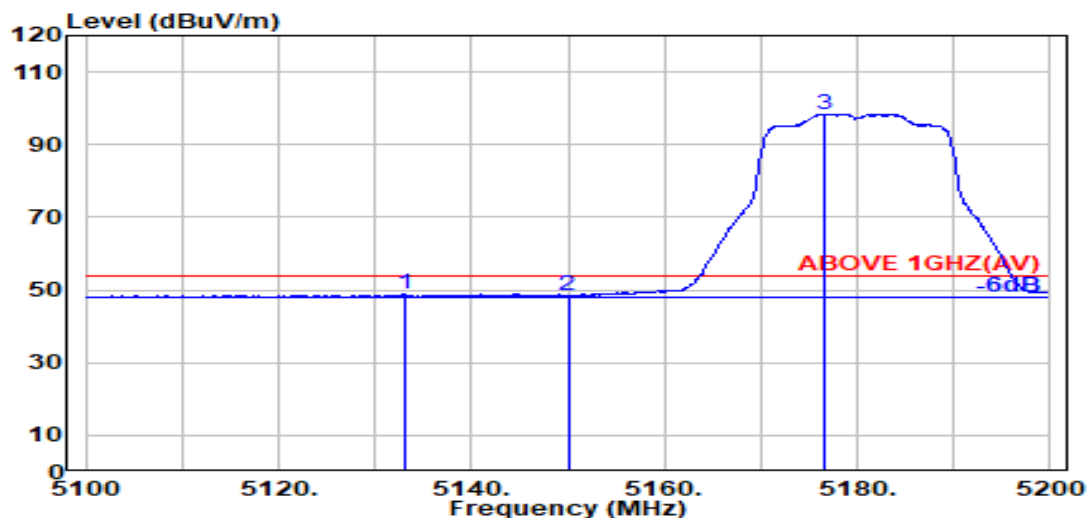

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.000	33.70	8.53	34.29	40.84	48.78	54.00	5.22	Average
5150.000	33.70	8.54	34.28	40.53	48.50	54.00	5.50	Average
@ 5176.500	33.70	8.56	34.27	90.36	98.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

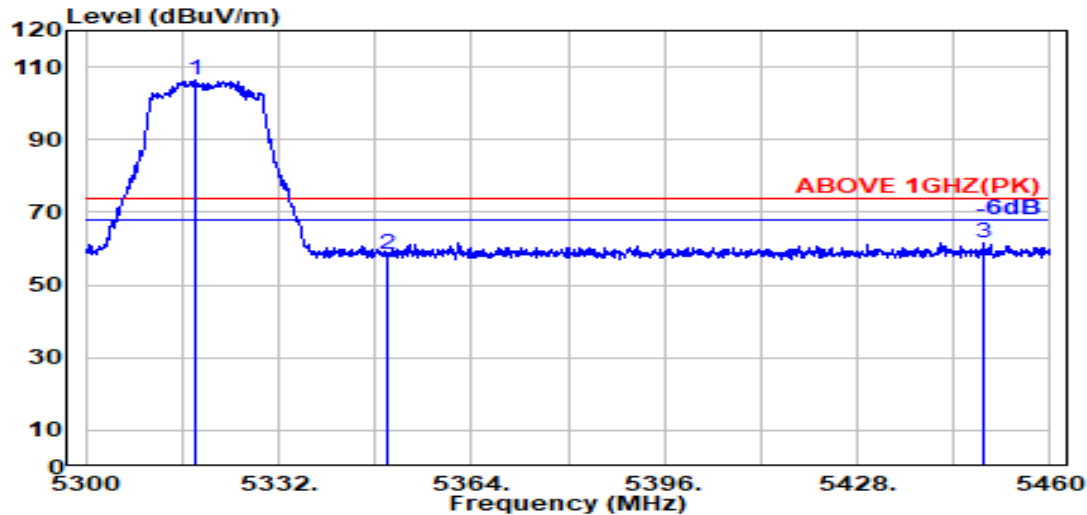

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	34.03	8.65	34.23	97.88	106.33	---	---	Peak
5350.000	33.90	8.67	34.22	49.95	58.30	74.00	15.70	Peak
5449.100	34.20	8.72	34.19	52.96	61.69	74.00	12.31	Peak

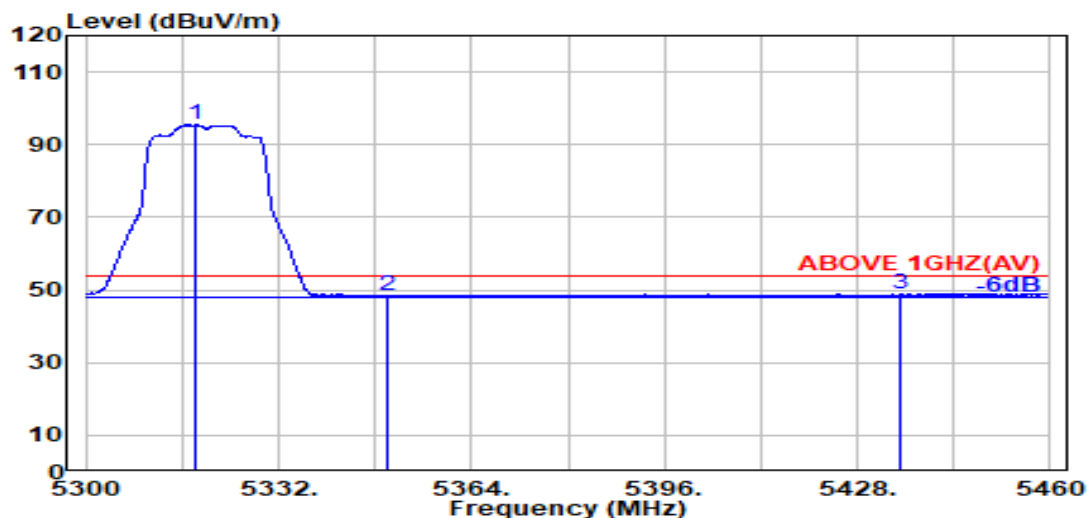

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	34.03	8.65	34.23	86.98	95.43	---	---	Average
5350.000	33.90	8.67	34.22	40.01	48.36	54.00	5.64	Average
5435.000	34.17	8.72	34.19	40.23	48.92	54.00	5.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

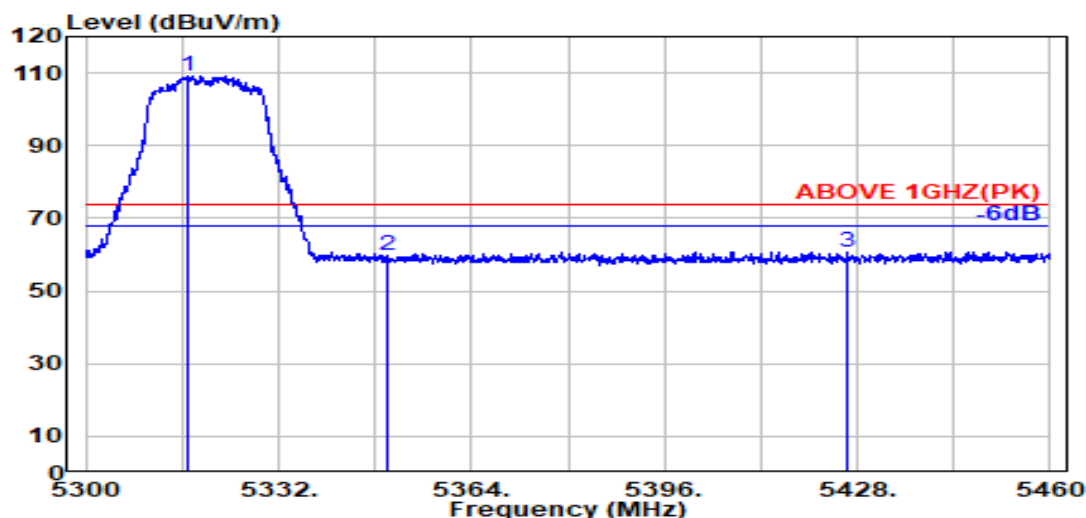

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.03	8.65	34.23	100.86	109.31	---	---	Peak
5350.000	33.90	8.67	34.22	51.31	59.66	74.00	14.34	Peak
5426.400	34.15	8.71	34.19	52.20	60.87	74.00	13.13	Peak

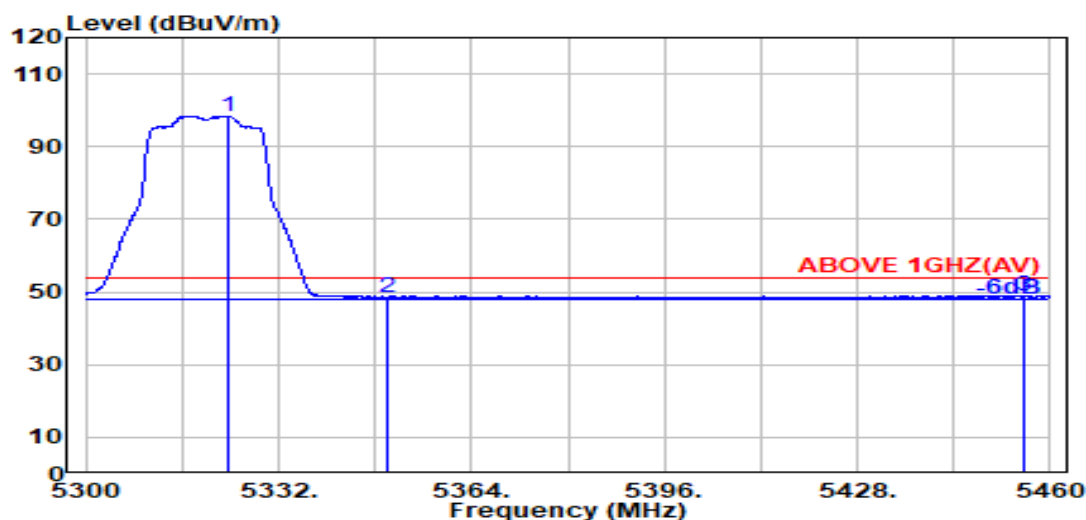

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	34.00	8.65	34.22	90.03	98.46	---	---	Average
5350.000	33.90	8.67	34.22	40.28	48.63	54.00	5.37	Average
5455.800	34.19	8.73	34.18	40.34	49.07	54.00	4.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

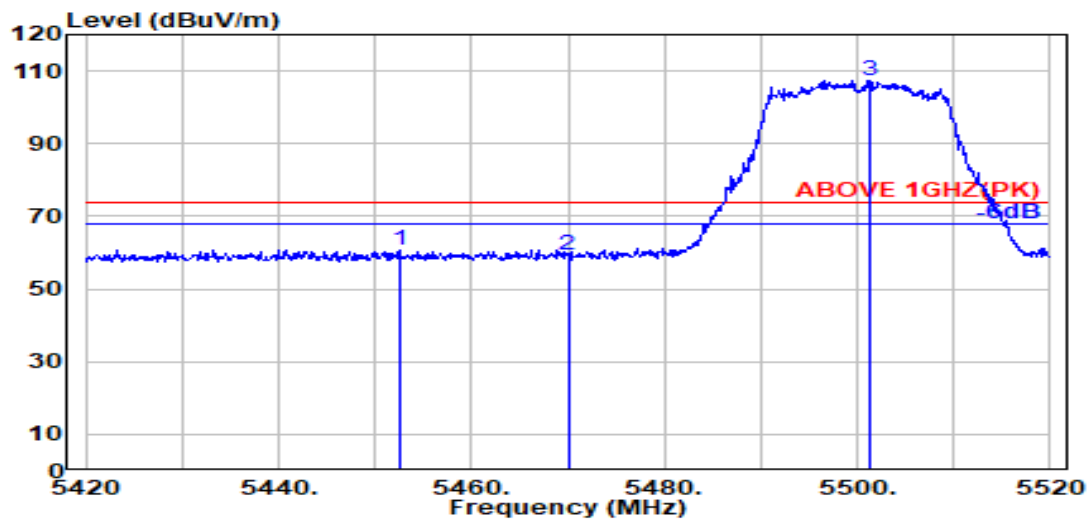

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.500	34.19	8.73	34.18	51.97	60.71	74.00	13.29	Peak
5470.000	34.16	8.74	34.18	50.68	59.40	74.00	14.60	Peak
@ 5501.200	34.10	8.75	34.17	98.56	107.24	---	---	Peak

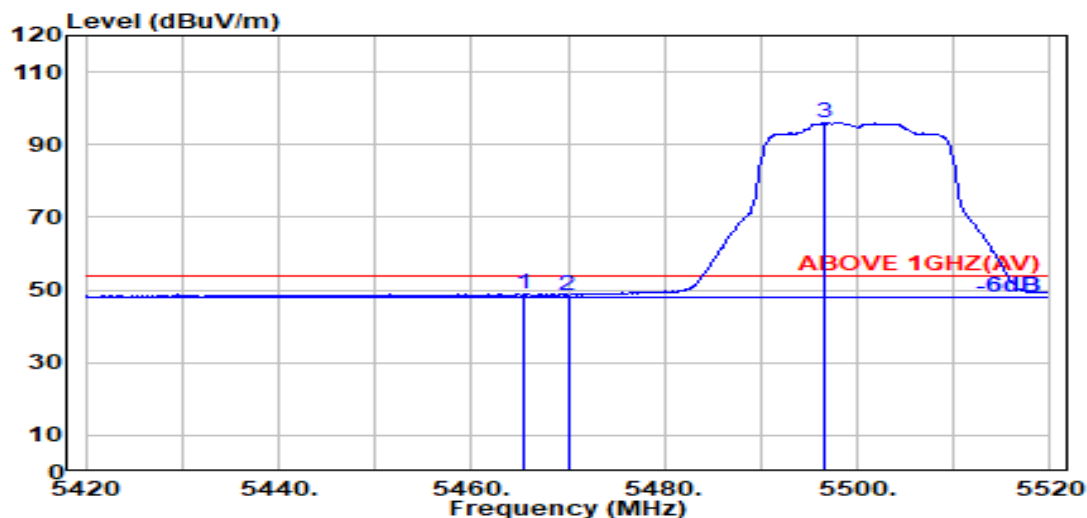

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.17	8.73	34.18	40.18	48.90	54.00	5.10	Average
5470.000	34.16	8.74	34.18	39.90	48.62	54.00	5.38	Average
@ 5496.700	34.11	8.75	34.17	87.31	96.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

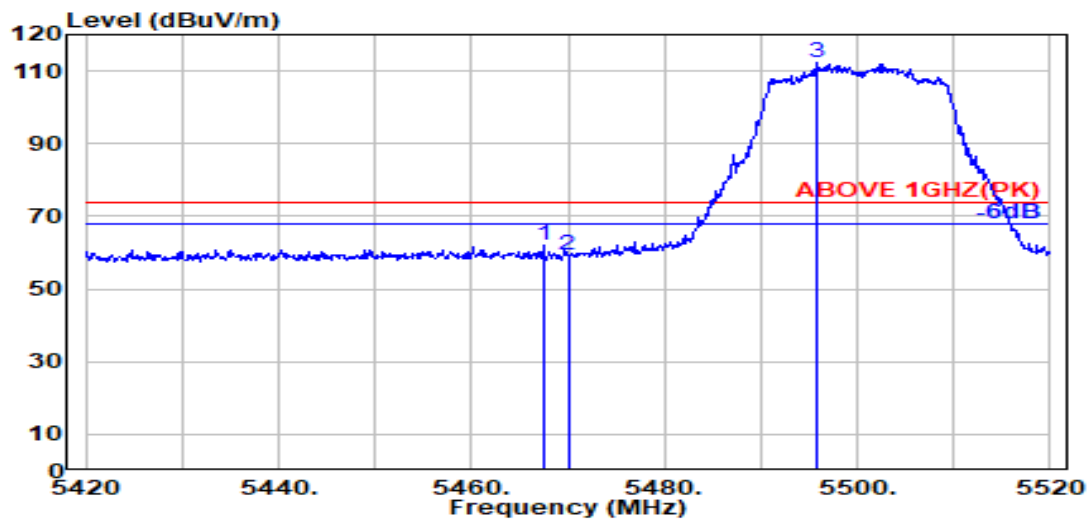

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	8.73	34.18	53.16	61.88	74.00	12.12	Peak
5470.000	34.16	8.74	34.18	50.71	59.43	74.00	14.57	Peak
@ 5495.700	34.11	8.75	34.17	103.42	112.11	---	---	Peak

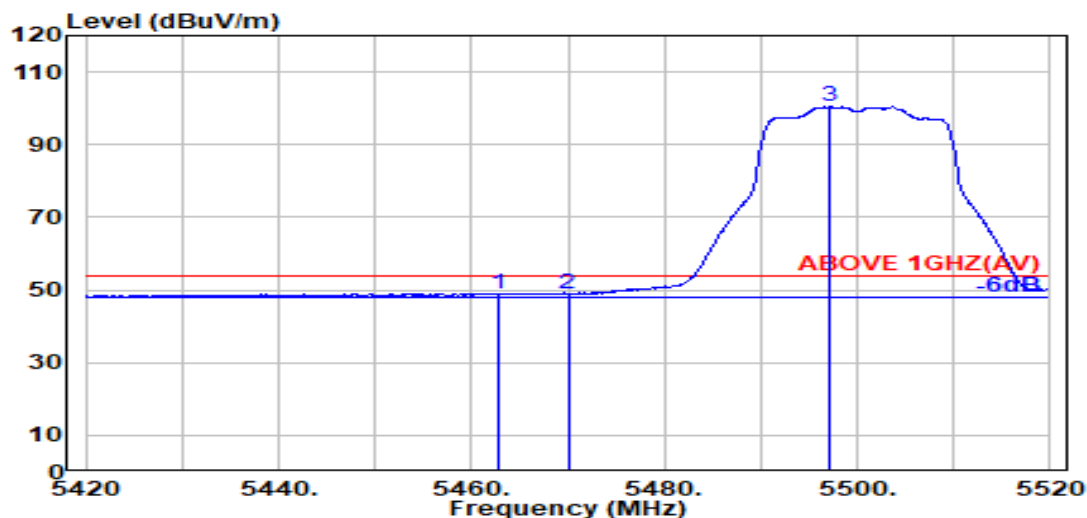

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.900	34.17	8.73	34.18	40.37	49.10	54.00	4.90	Average
5470.000	34.16	8.74	34.18	40.25	48.97	54.00	5.03	Average
@ 5497.100	34.11	8.75	34.17	91.71	100.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

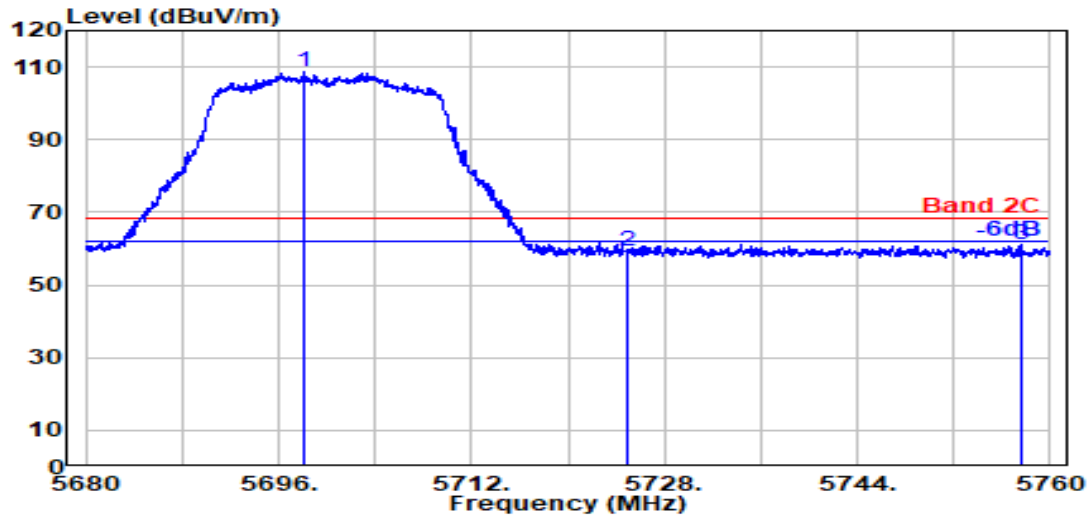

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.050	33.81	8.87	34.26	100.16	108.57	---	---	Peak
5725.000	33.80	8.88	34.28	51.03	59.44	68.20	8.76	Peak
5757.550	33.83	8.90	34.29	52.55	60.98	68.20	7.22	Peak

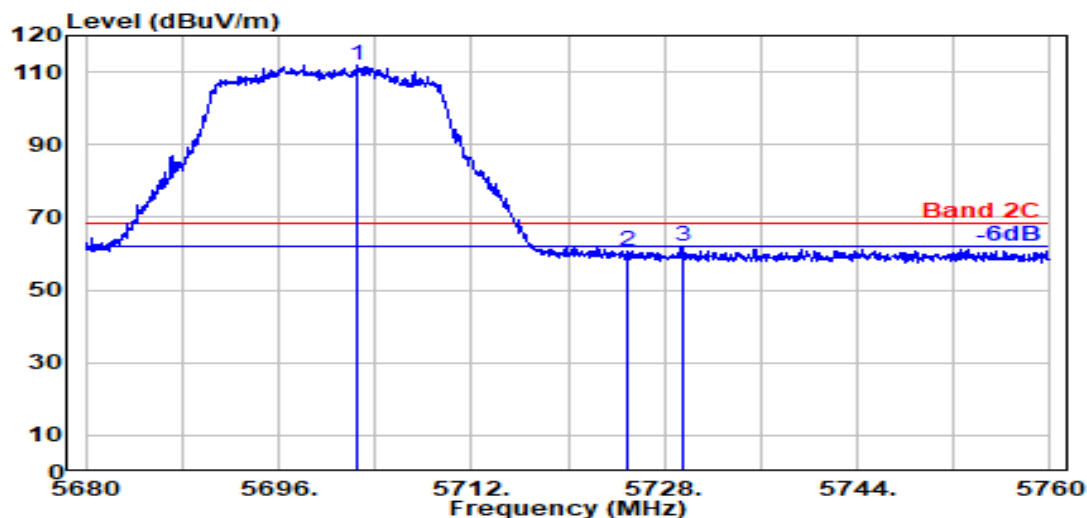

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.450	33.80	8.87	34.27	103.32	111.72	---	---	Peak
5725.000	33.80	8.88	34.28	52.19	60.60	68.20	7.60	Peak
5729.450	33.80	8.88	34.28	53.60	62.00	68.20	6.20	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

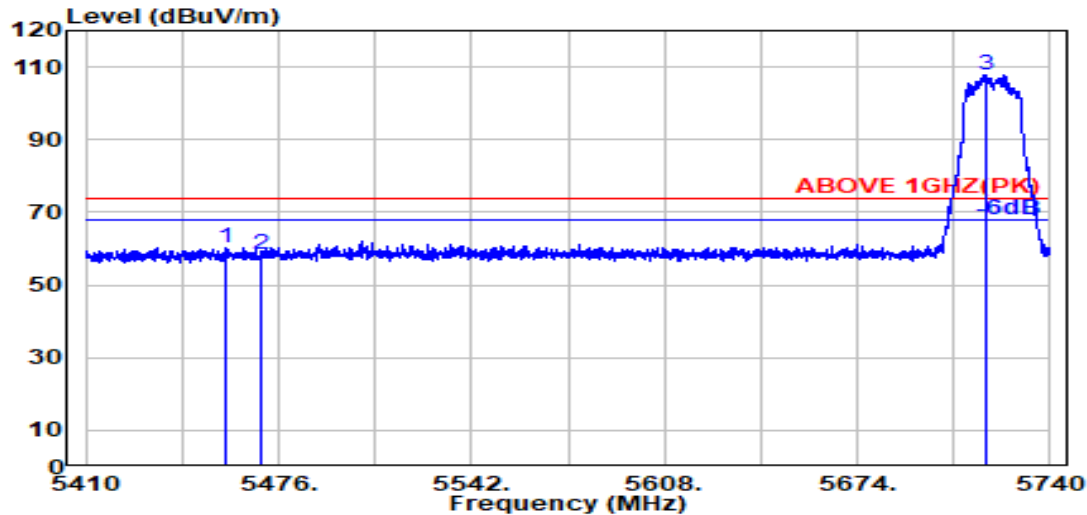

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.18	8.73	34.18	51.62	60.35	74.00	13.65	Peak
5470.000	34.16	8.74	34.18	49.62	58.34	74.00	15.66	Peak
@ 5718.300	33.80	8.88	34.27	99.47	107.88	---	---	Peak

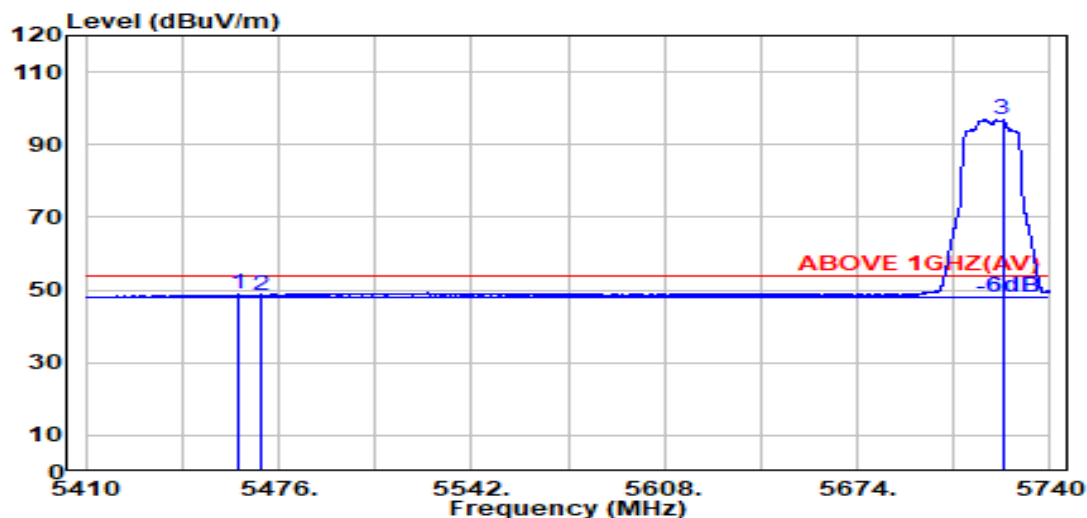

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.600	34.17	8.73	34.18	39.97	48.69	54.00	5.31	Average
5470.000	34.16	8.74	34.18	39.92	48.64	54.00	5.36	Average
@ 5723.700	33.80	8.88	34.28	88.32	96.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

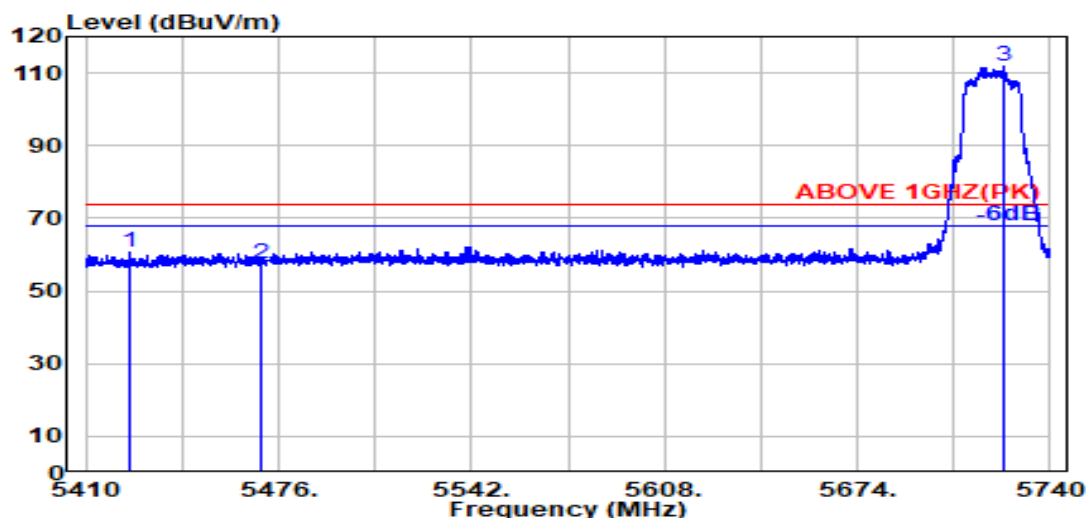

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.300	34.15	8.71	34.19	51.80	60.47	74.00	13.53	Peak
5470.000	34.16	8.74	34.18	48.69	57.41	74.00	16.59	Peak
@ 5724.000	33.80	8.88	34.28	103.63	112.04	---	---	Peak

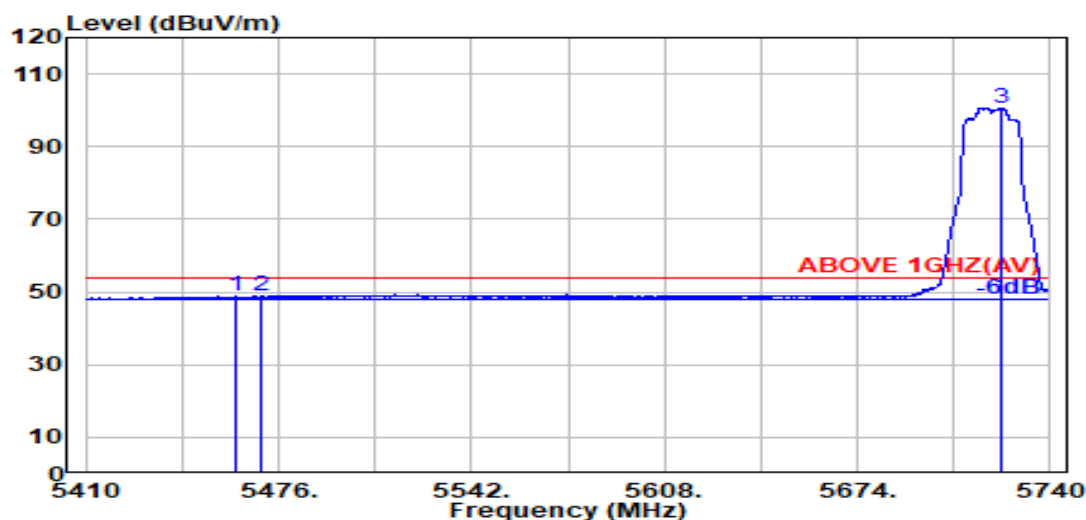

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.18	8.73	34.18	40.16	48.89	54.00	5.11	Average
5470.000	34.16	8.74	34.18	39.96	48.68	54.00	5.32	Average
@ 5723.400	33.80	8.88	34.28	92.34	100.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

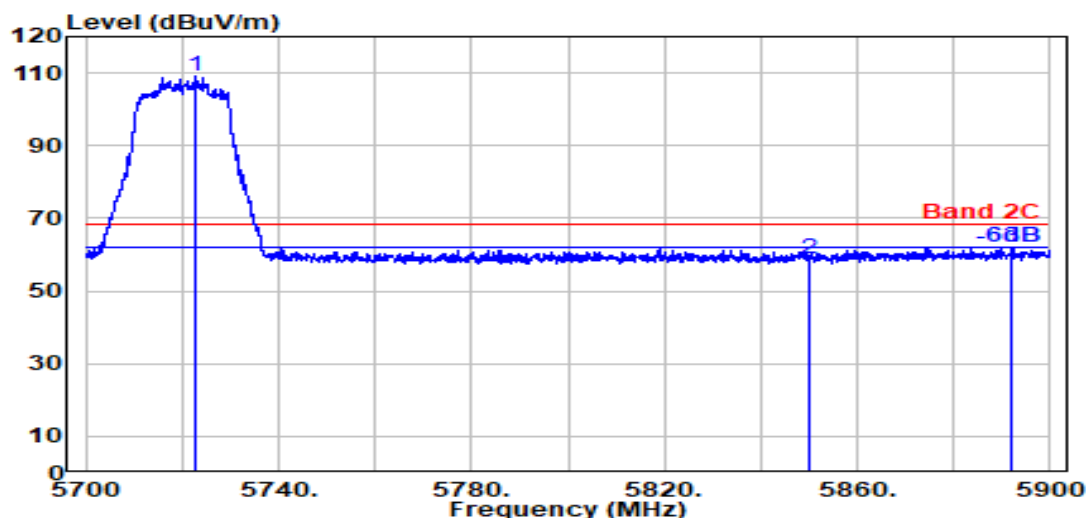

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.500	33.80	8.88	34.27	100.55	108.95	---	---	Peak
5850.000	34.10	8.95	34.33	50.11	58.82	68.20	9.38	Peak
5892.200	34.10	8.97	34.35	53.38	62.10	68.20	6.10	Peak

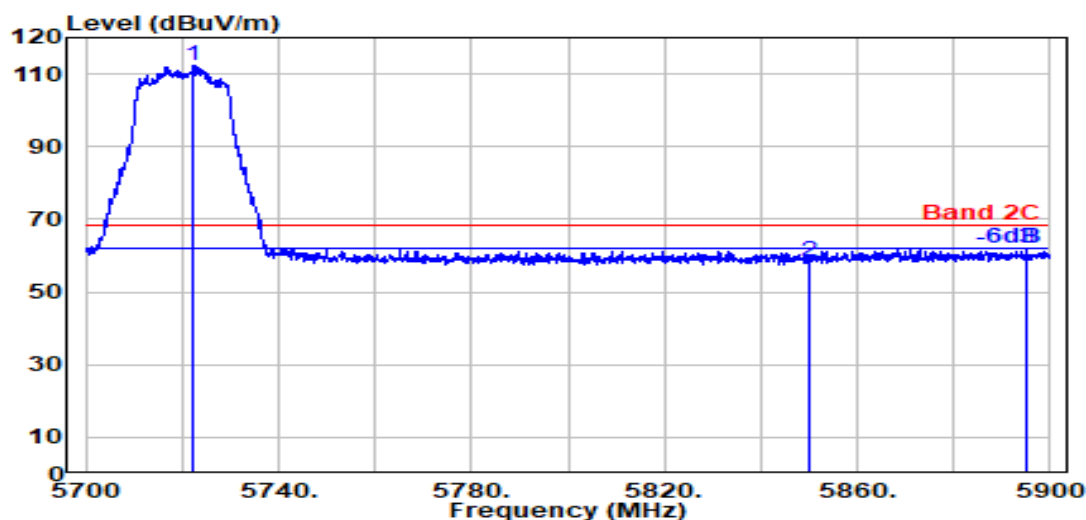

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.400	33.80	8.88	34.27	103.76	112.16	---	---	Peak
5850.000	34.10	8.95	34.33	49.69	58.41	68.20	9.79	Peak
5895.100	34.10	8.97	34.35	53.20	61.92	68.20	6.28	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

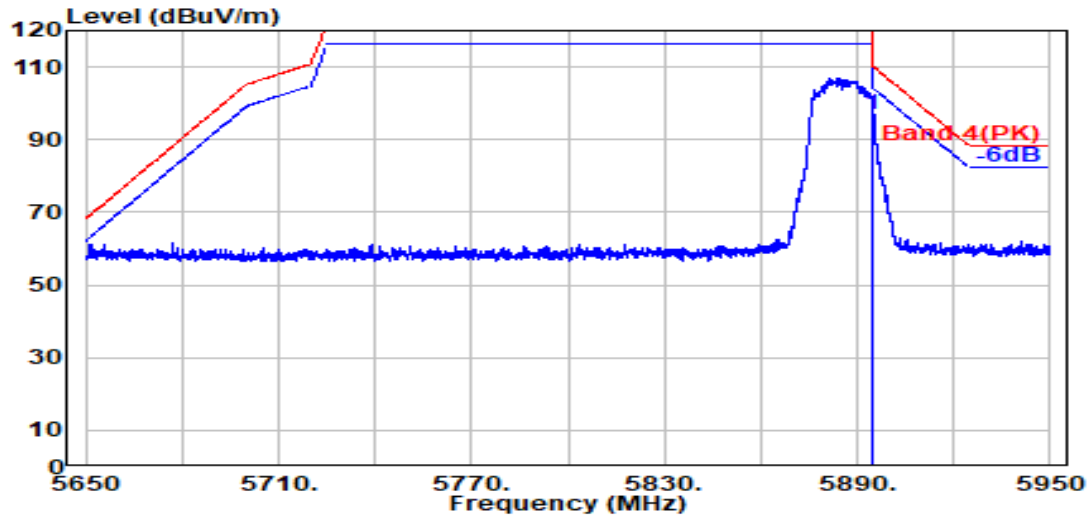

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	88.37	97.09	110.20	13.11	Peak

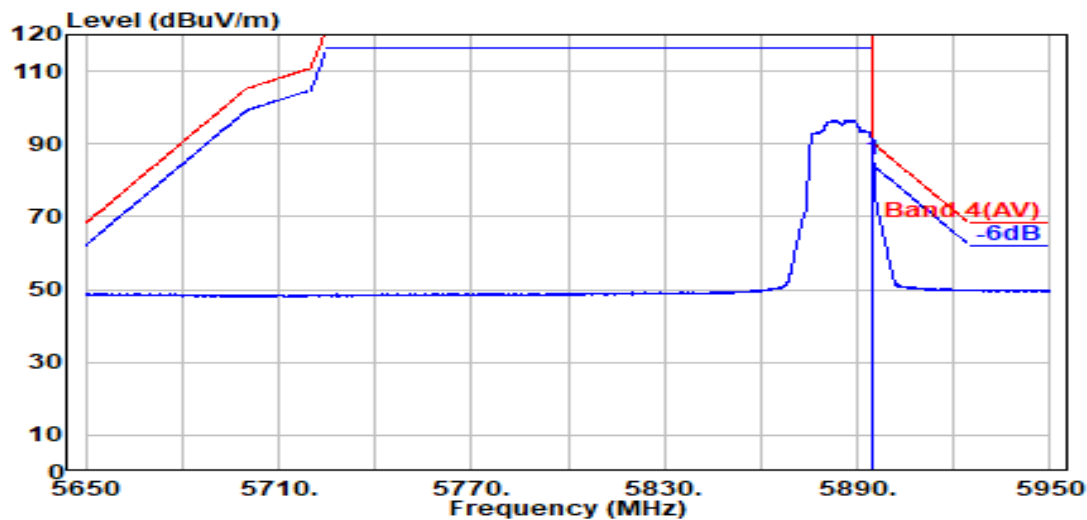

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	76.94	85.66	110.20	13.11	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

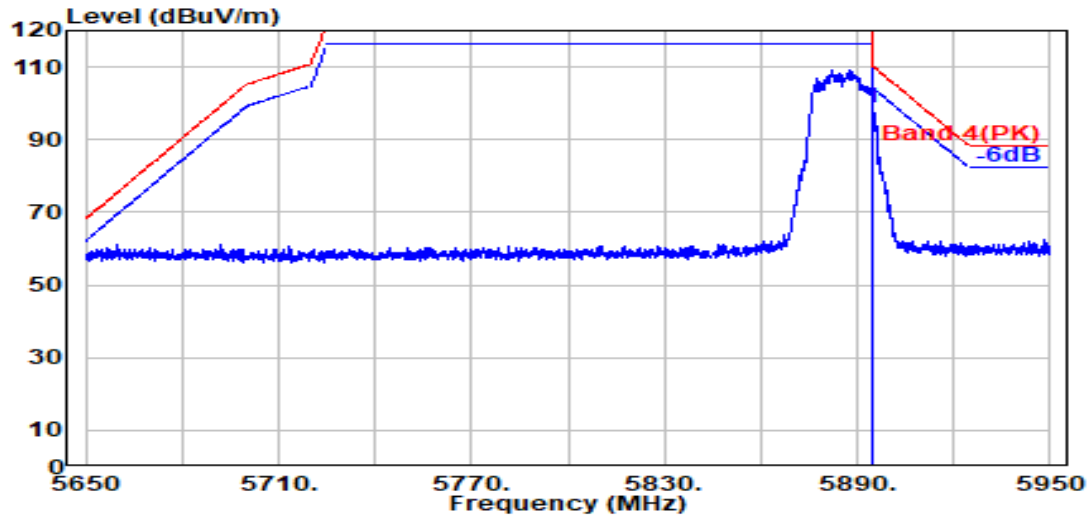

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	90.12	98.84	110.20	11.36	Peak

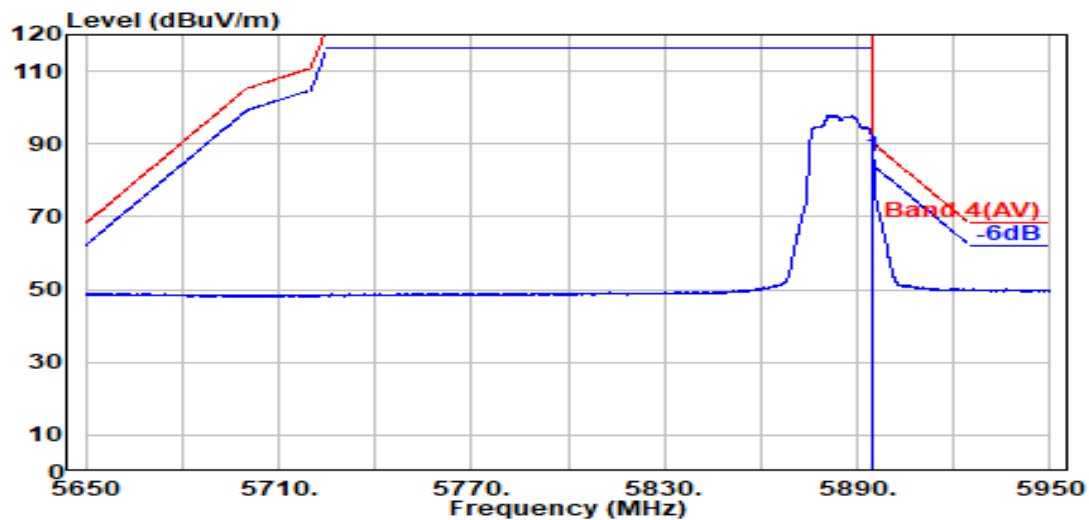


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	77.91	86.63	90.20	3.57	Average


Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

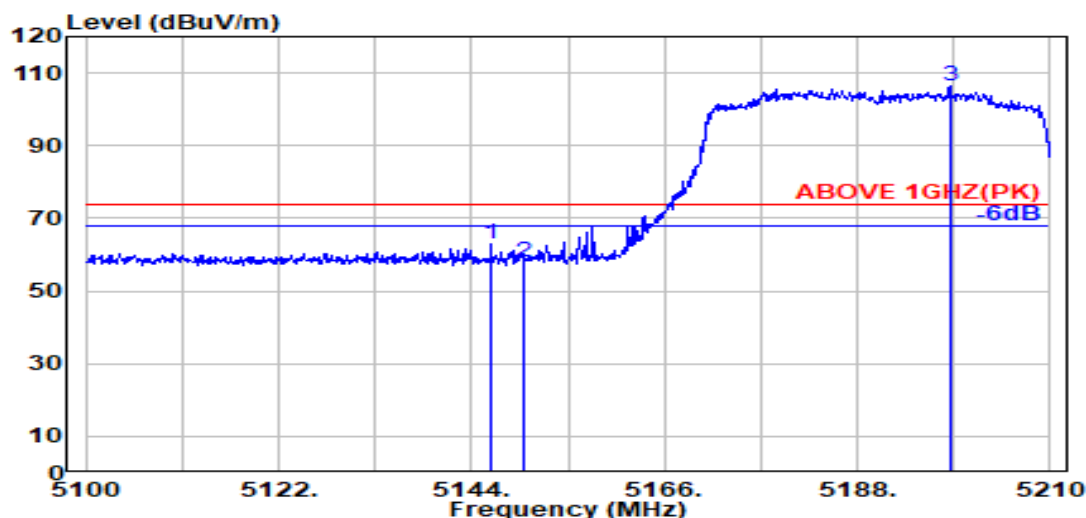

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.70	8.54	34.28	54.78	62.74	74.00	11.26	Peak
5150.000	33.70	8.54	34.28	50.03	58.00	74.00	16.00	Peak
@ 5198.600	33.70	8.57	34.26	98.21	106.21	---	---	Peak

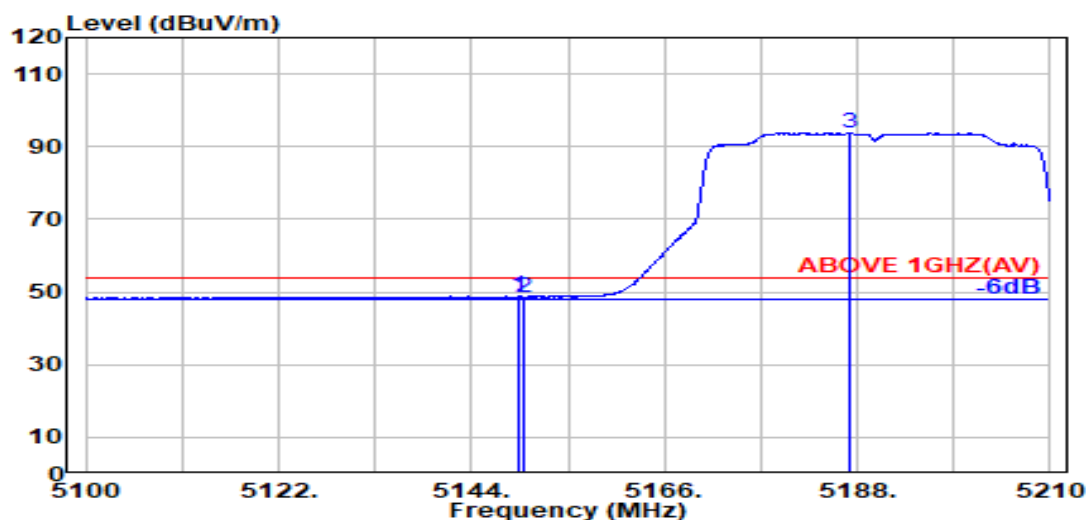

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.70	8.54	34.28	40.91	48.87	54.00	5.13	Average
5150.000	33.70	8.54	34.28	40.62	48.58	54.00	5.42	Average
@ 5187.000	33.70	8.57	34.27	85.78	93.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

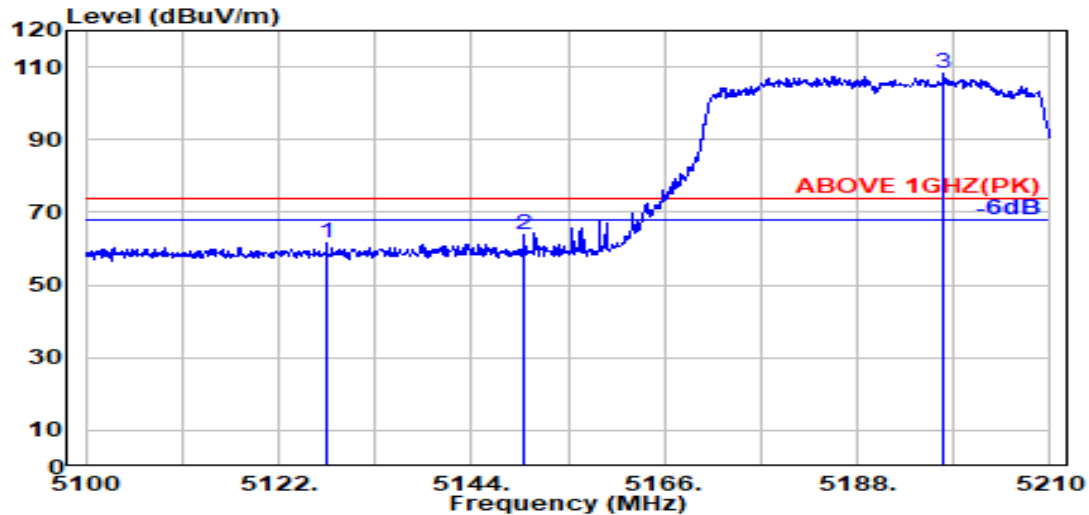

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.500	33.70	8.53	34.29	53.52	61.46	74.00	12.54	Peak
5150.000	33.70	8.54	34.28	55.67	63.64	74.00	10.36	Peak
@ 5197.900	33.70	8.57	34.26	100.15	108.16	---	---	Peak

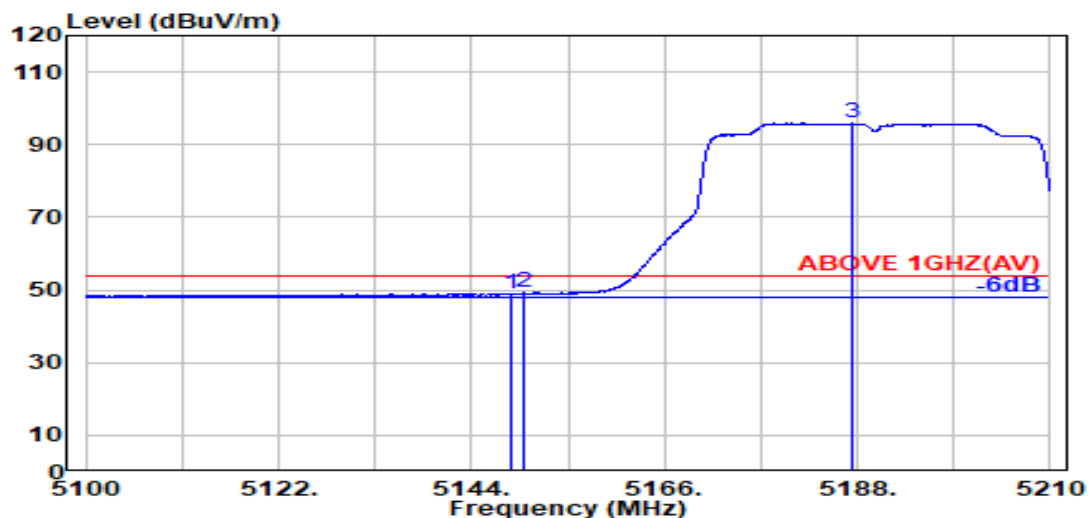

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.70	8.54	34.28	41.12	49.08	54.00	4.92	Average
5150.000	33.70	8.54	34.28	41.19	49.16	54.00	4.84	Average
@ 5187.300	33.70	8.57	34.27	87.96	95.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

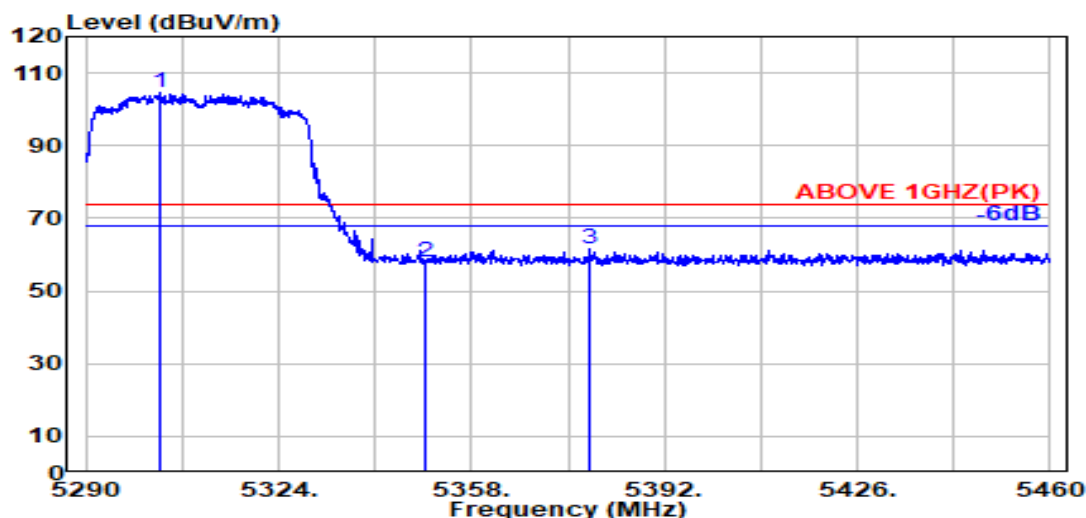

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.300	34.09	8.64	34.23	95.99	104.48	---	---	Peak
5350.000	33.90	8.67	34.22	49.74	58.09	74.00	15.91	Peak
5378.900	34.02	8.68	34.21	53.05	61.55	74.00	12.45	Peak

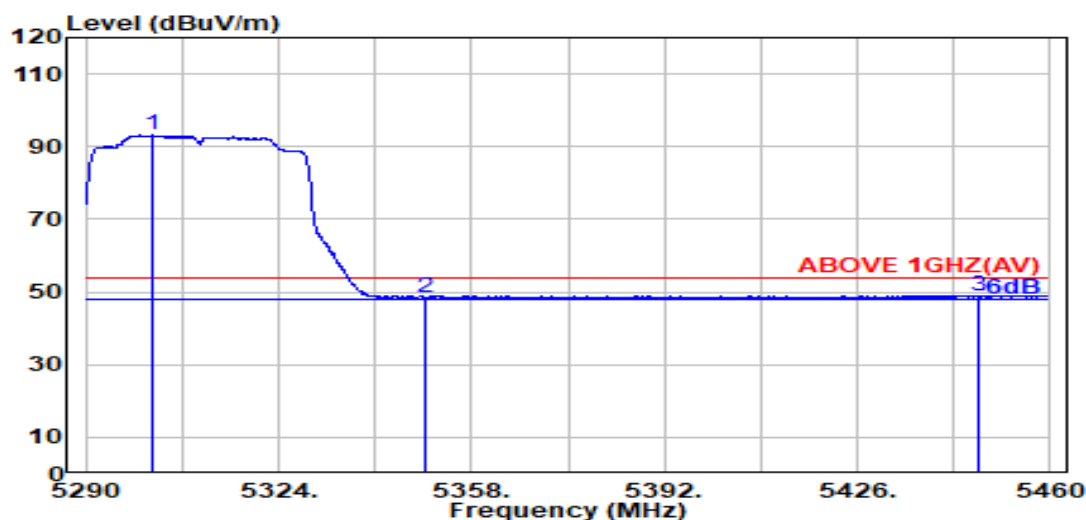

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.900	34.09	8.64	34.23	84.62	93.11	---	---	Average
5350.000	33.90	8.67	34.22	40.20	48.54	54.00	5.46	Average
5447.200	34.19	8.72	34.19	40.39	49.12	54.00	4.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

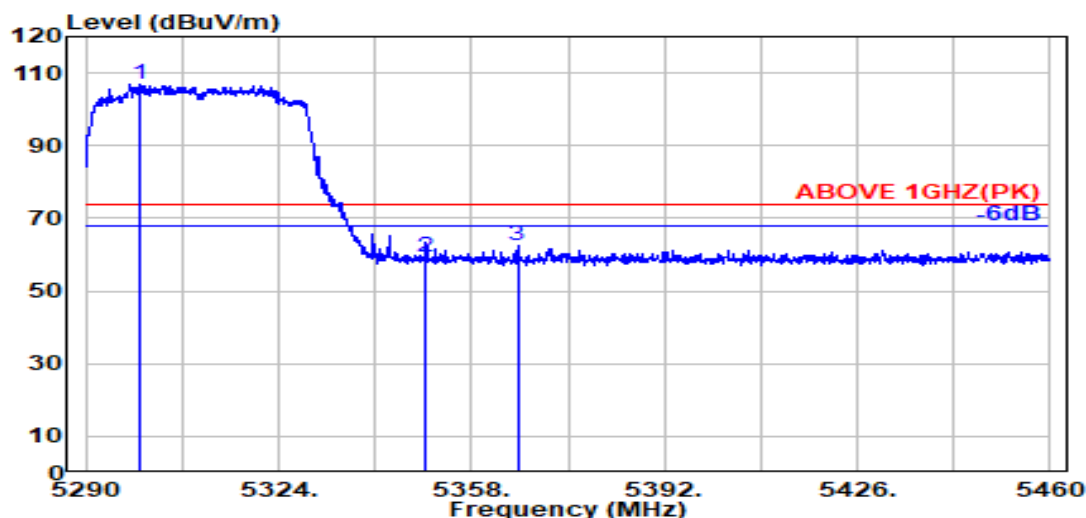

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.600	34.10	8.64	34.23	98.56	107.06	---	---	Peak
5350.000	33.90	8.67	34.22	51.15	59.50	74.00	14.50	Peak
5366.100	33.96	8.67	34.21	54.04	62.47	74.00	11.53	Peak

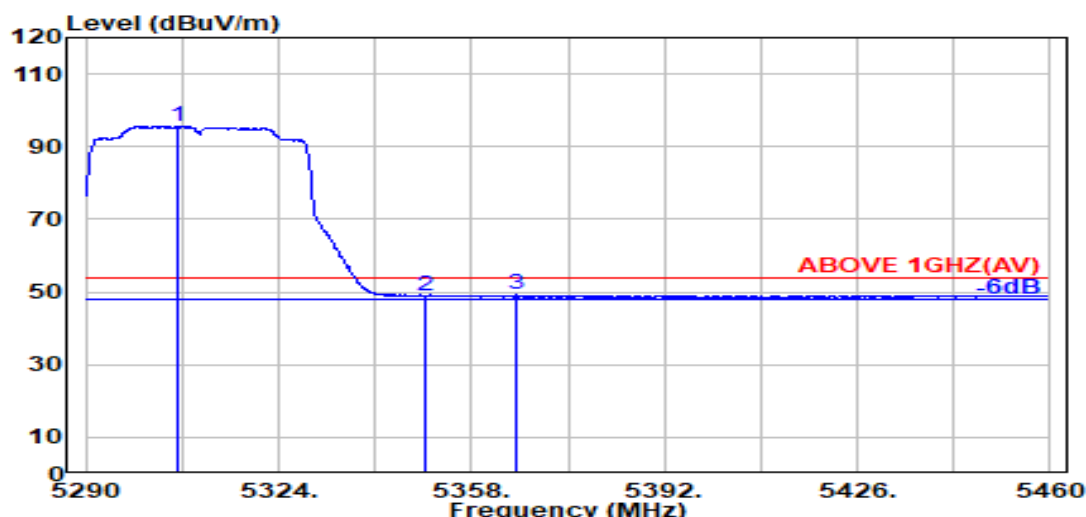

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.200	34.08	8.64	34.23	87.07	95.56	---	---	Average
5350.000	33.90	8.67	34.22	40.60	48.95	54.00	5.05	Average
5365.800	33.96	8.67	34.21	40.85	49.28	54.00	4.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

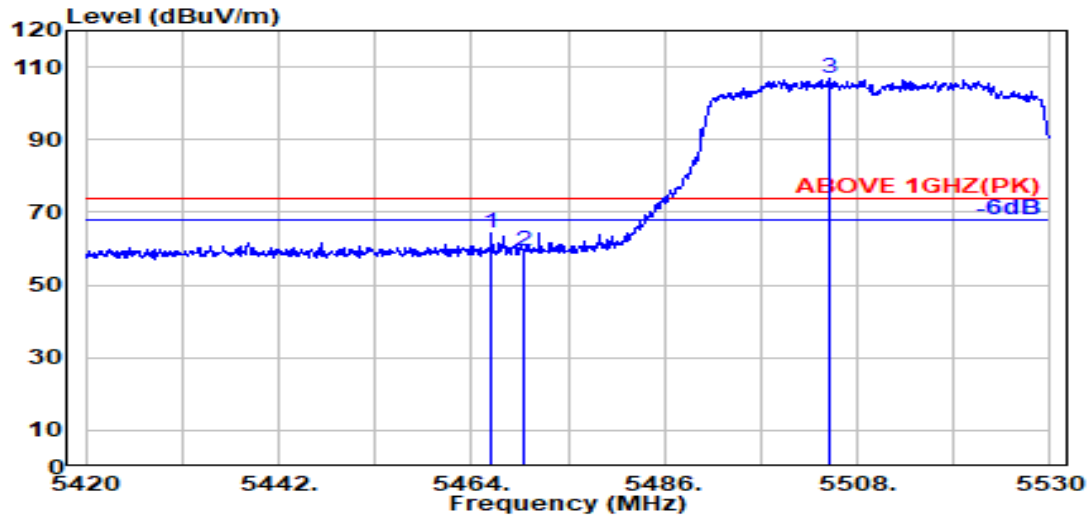

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.300	34.17	8.73	34.18	55.39	64.11	74.00	9.89	Peak
5470.000	34.16	8.74	34.18	50.53	59.25	74.00	14.75	Peak
@ 5504.800	34.10	8.76	34.17	98.15	106.84	---	---	Peak

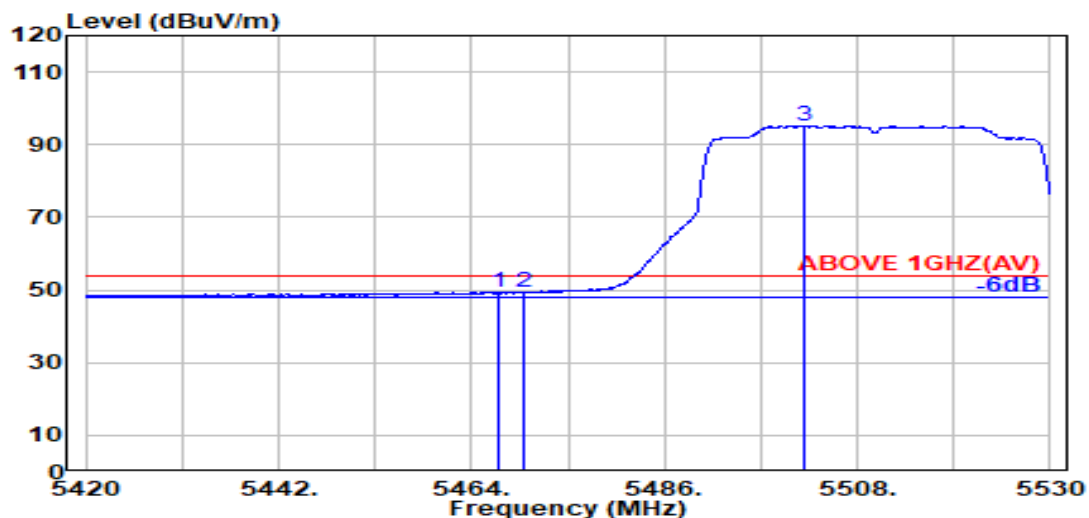

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.100	34.17	8.73	34.18	40.76	49.48	54.00	4.52	Average
5470.000	34.16	8.74	34.18	40.75	49.47	54.00	4.53	Average
@ 5501.900	34.10	8.75	34.17	86.57	95.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

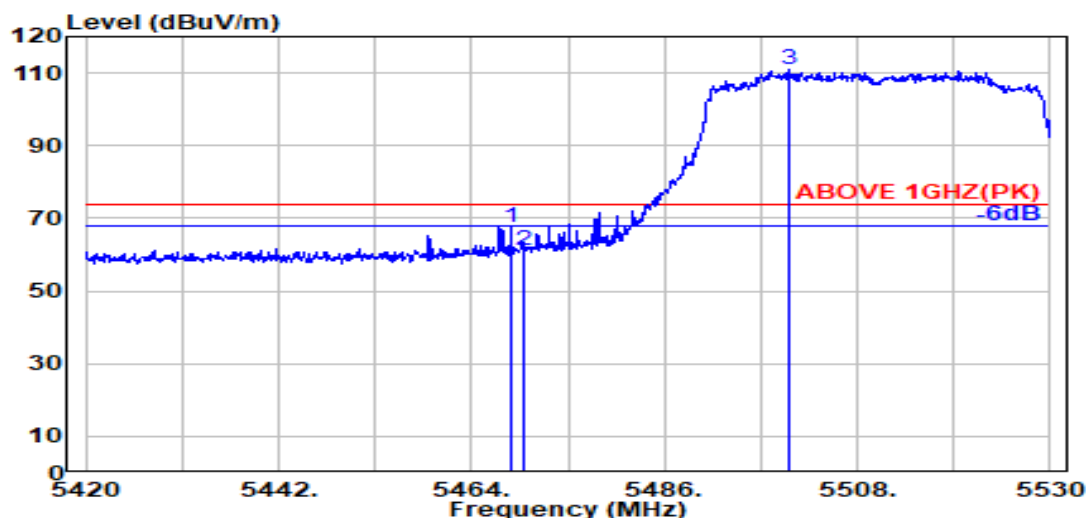

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	58.68	67.40	74.00	6.60	Peak
5470.000	34.16	8.74	34.18	52.35	61.07	74.00	12.93	Peak
@ 5500.300	34.10	8.75	34.17	102.46	111.14	---	---	Peak

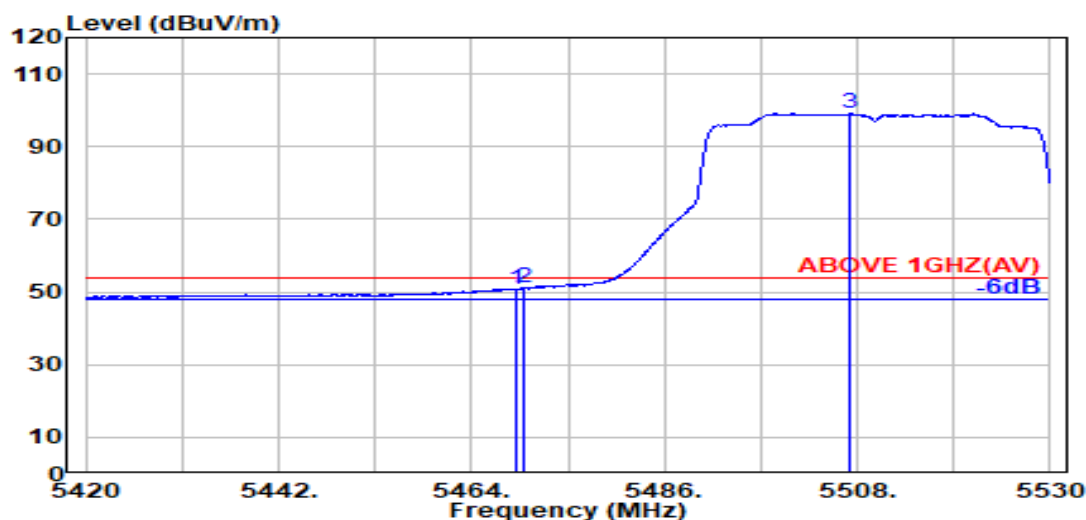

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	42.11	50.83	54.00	3.17	Average
5470.000	34.16	8.74	34.18	42.24	50.95	54.00	3.05	Average
@ 5507.200	34.10	8.76	34.17	90.48	99.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

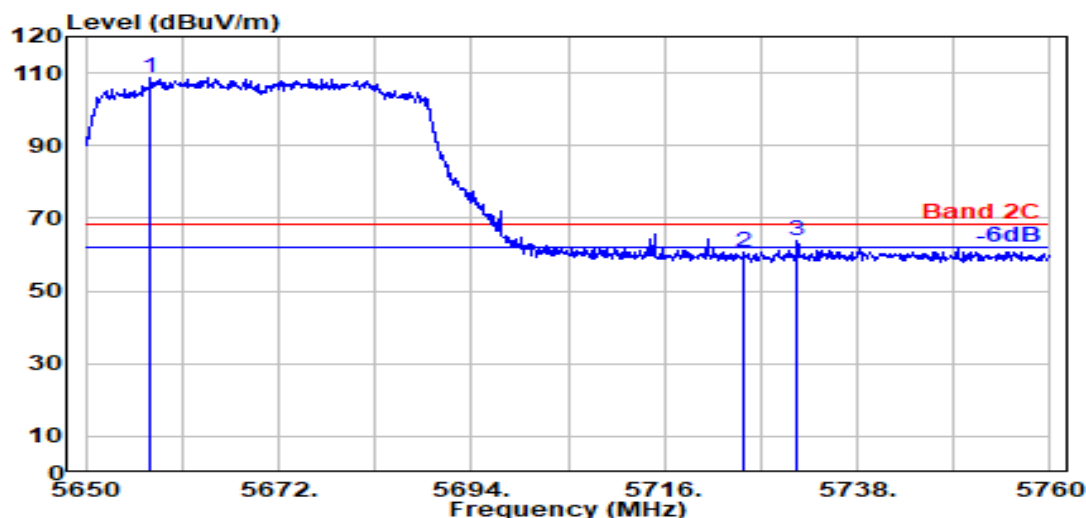

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.400	33.97	8.84	34.24	100.16	108.72	---	---	Peak
5725.000	33.80	8.88	34.28	52.16	60.56	68.20	7.64	Peak
5731.200	33.80	8.88	34.28	55.29	63.70	68.20	4.50	Peak

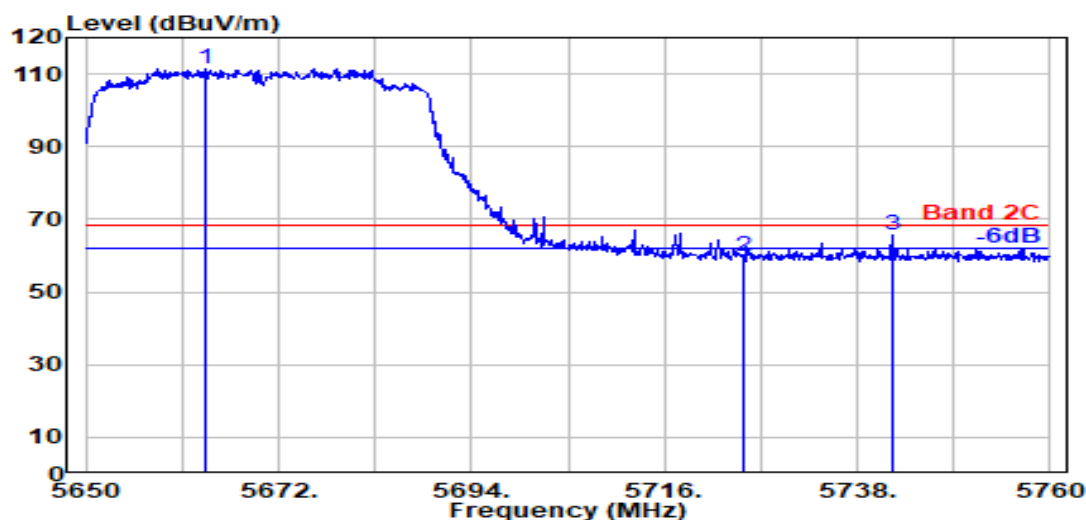

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5663.700	33.95	8.85	34.25	103.00	111.54	---	---	Peak
5725.000	33.80	8.88	34.28	51.17	59.58	68.20	8.62	Peak
5741.900	33.80	8.89	34.28	57.39	65.80	68.20	2.40	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

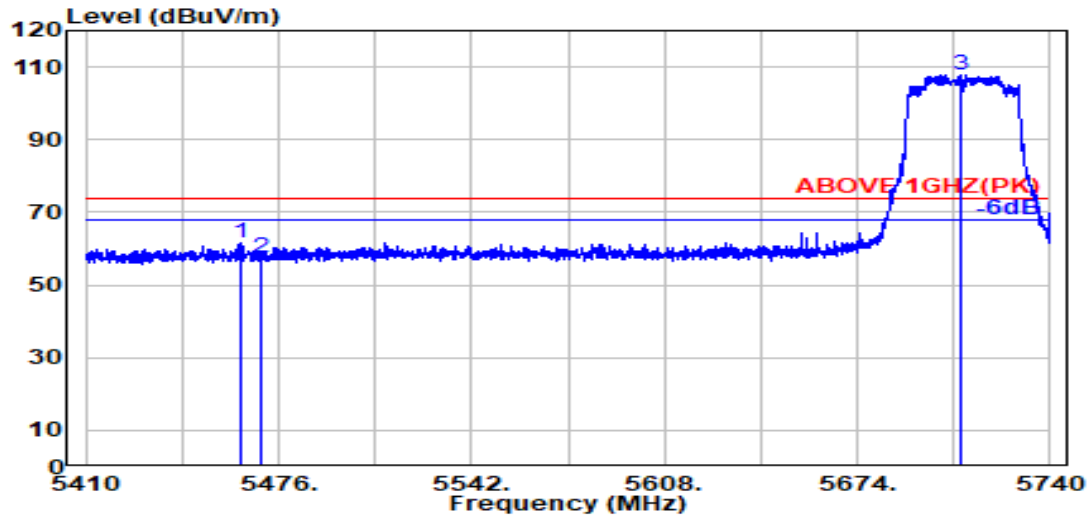

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.17	8.73	34.18	52.86	61.58	74.00	12.42	Peak
5470.000	34.16	8.74	34.18	48.80	57.51	74.00	16.49	Peak
@ 5709.200	33.80	8.87	34.27	99.34	107.74	---	---	Peak

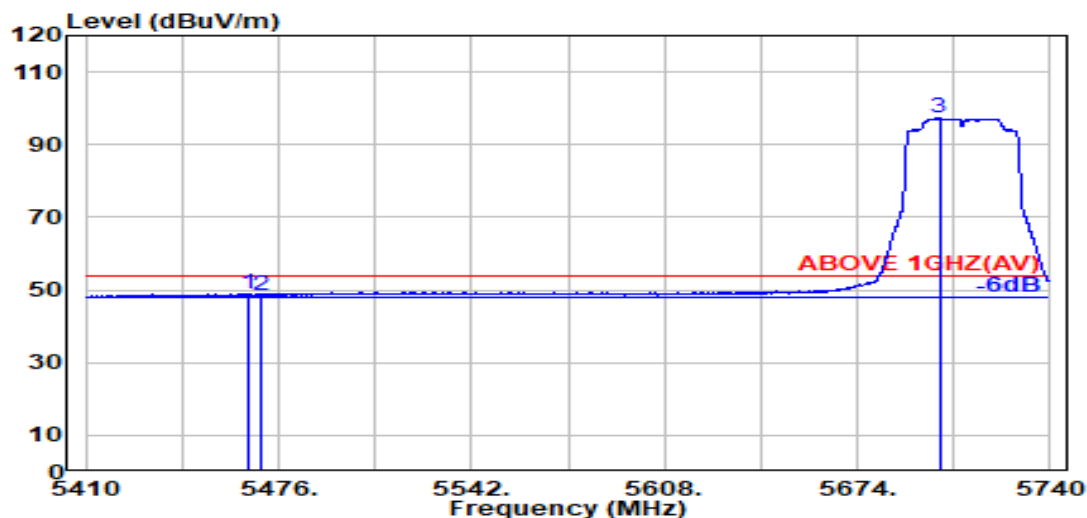

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.17	8.73	34.18	40.16	48.88	54.00	5.12	Average
5470.000	34.16	8.74	34.18	39.77	48.49	54.00	5.51	Average
@ 5702.100	33.80	8.87	34.27	88.92	97.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

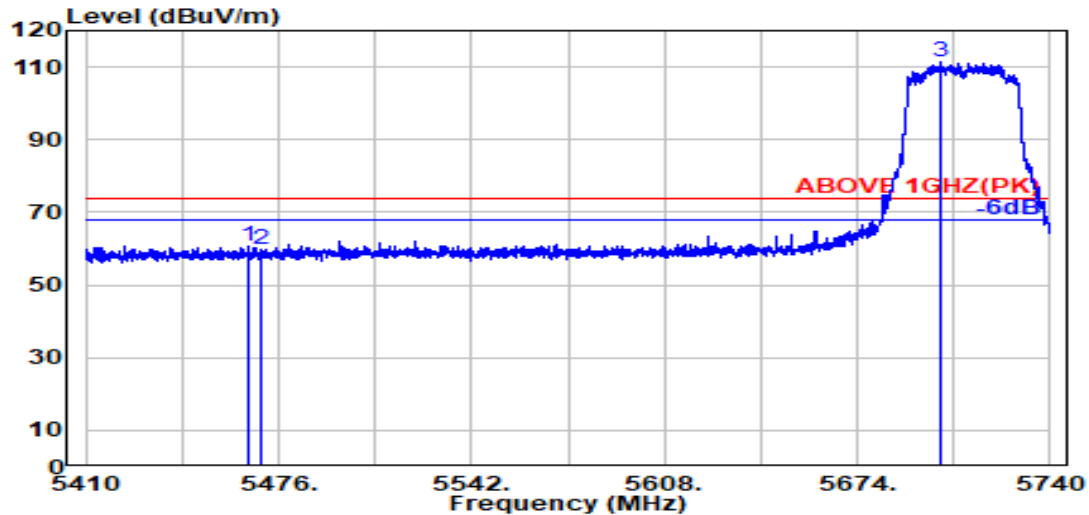

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.17	8.73	34.18	51.98	60.70	74.00	13.30	Peak
5470.000	34.16	8.74	34.18	51.01	59.73	74.00	14.27	Peak
@ 5702.700	33.80	8.87	34.27	102.99	111.39	---	---	Peak

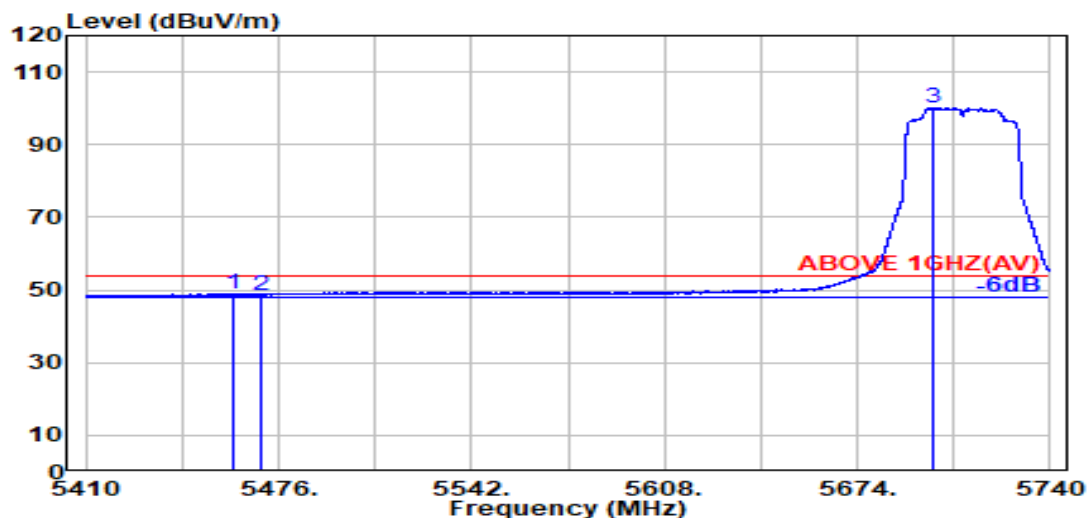

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.400	34.18	8.73	34.18	40.26	48.98	54.00	5.02	Average
5470.000	34.16	8.74	34.18	39.90	48.61	54.00	5.39	Average
@ 5700.100	33.80	8.87	34.26	91.67	100.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

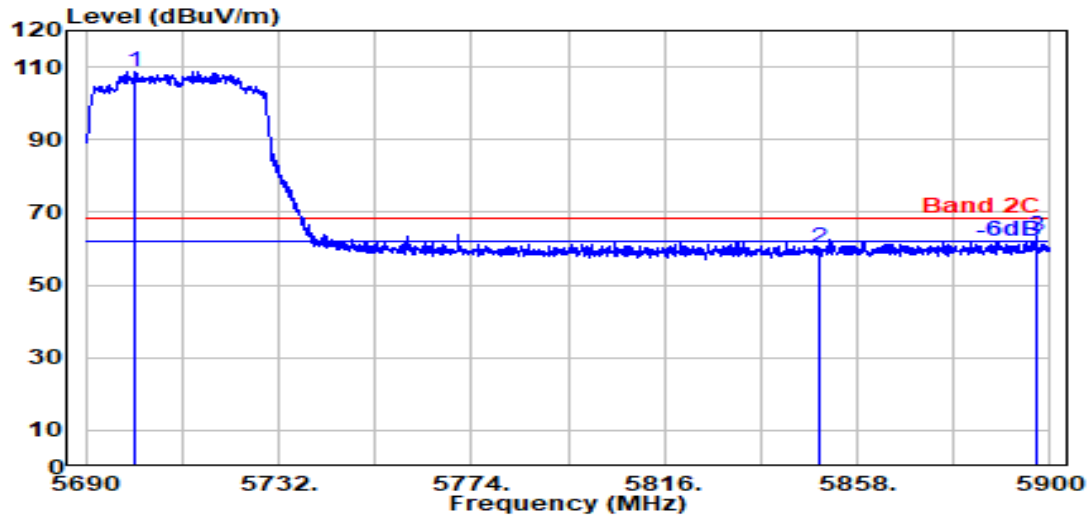

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.900	33.80	8.87	34.26	100.23	108.63	---	---	Peak
5850.000	34.10	8.95	34.33	51.47	60.19	68.20	8.01	Peak
5896.800	34.10	8.97	34.35	54.71	63.43	68.20	4.77	Peak

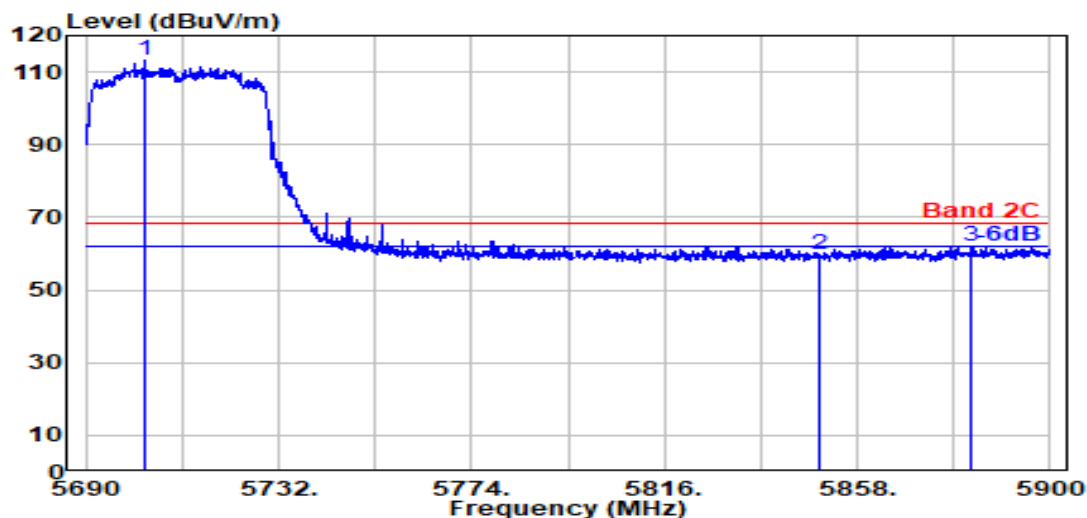

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.700	33.80	8.87	34.27	104.69	113.09	---	---	Peak
5850.000	34.10	8.95	34.33	51.06	59.78	68.20	8.42	Peak
5882.600	34.10	8.97	34.35	53.15	61.87	68.20	6.33	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

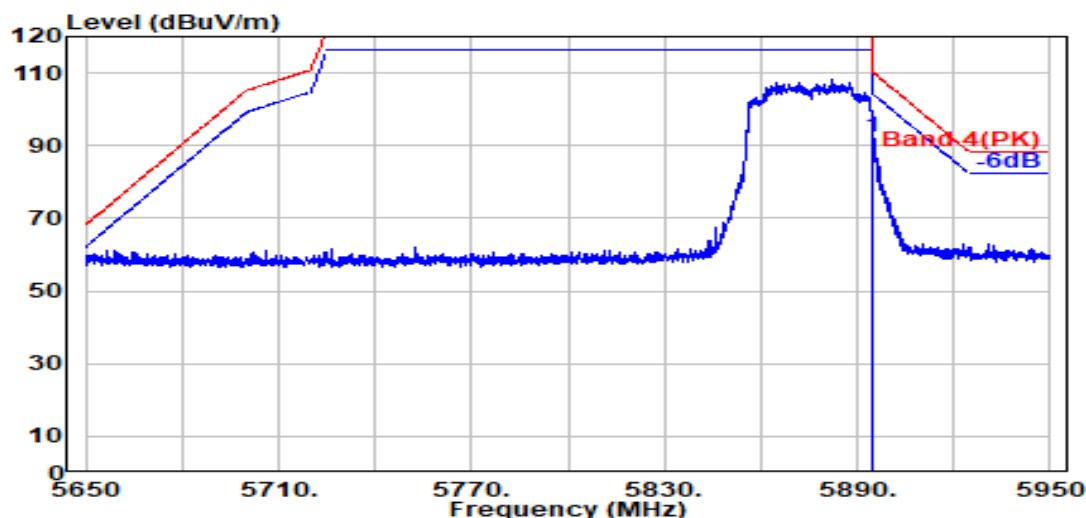

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	83.88	92.60	110.20	17.60	Peak

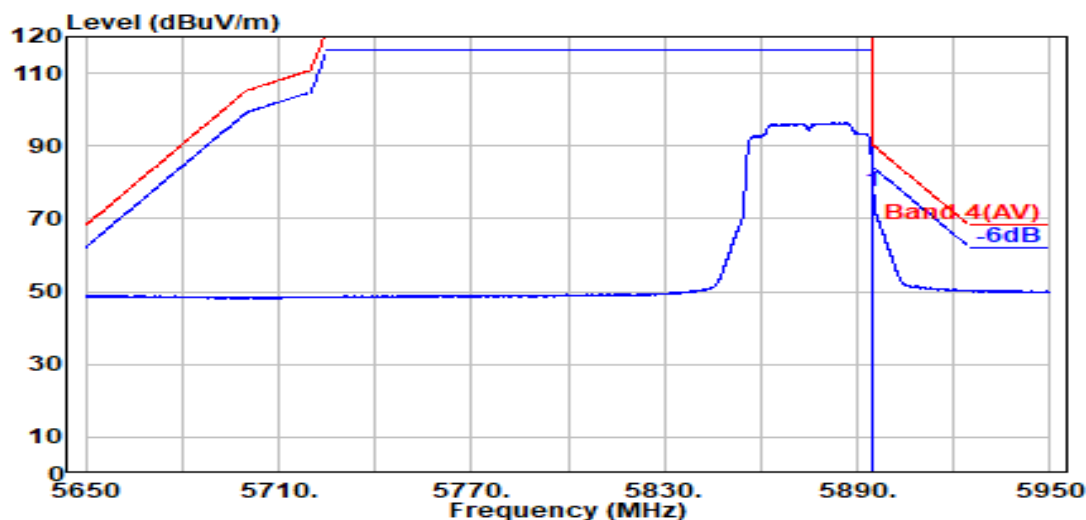

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	68.90	77.62	90.20	12.58	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

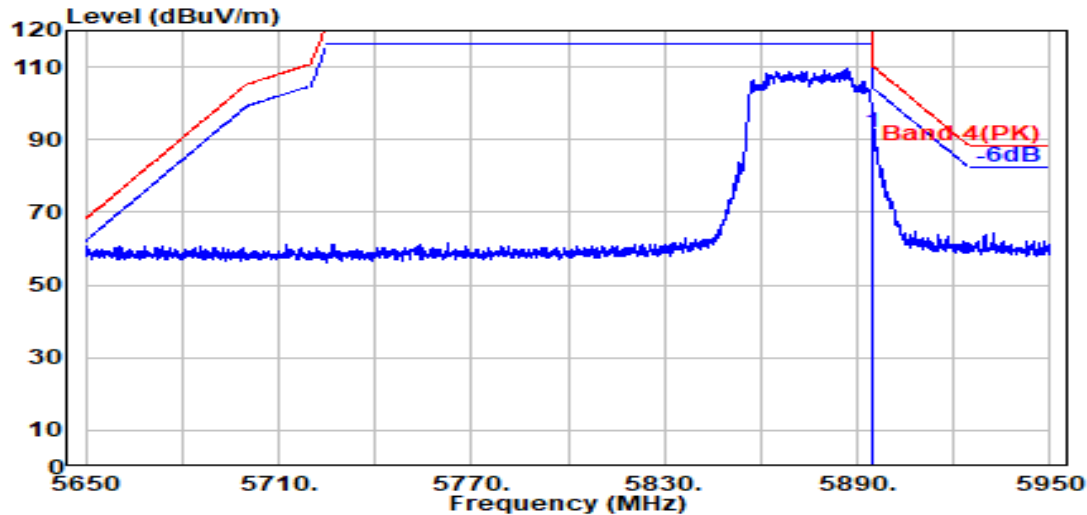

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	83.38	92.10	110.20	18.10	Peak

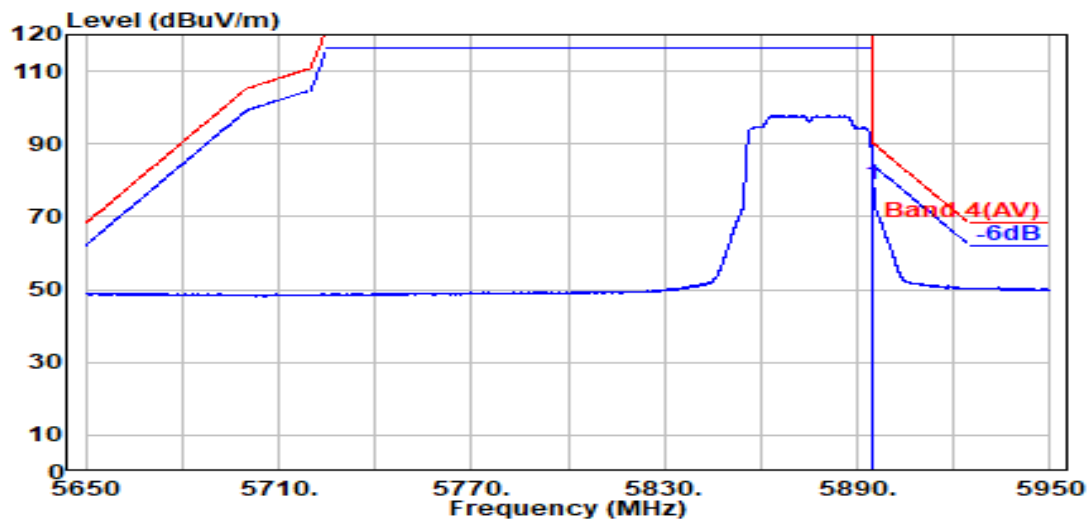

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	69.90	78.62	90.20	11.58	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

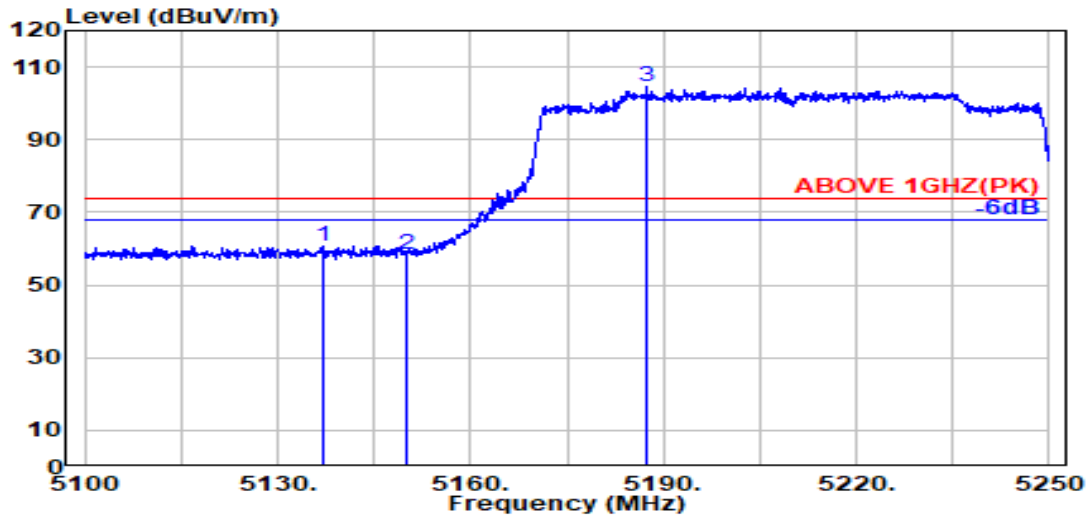

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.000	33.70	8.54	34.28	52.94	60.89	74.00	13.11	Peak
5150.000	33.70	8.54	34.28	50.57	58.54	74.00	15.46	Peak
@ 5187.300	33.70	8.57	34.27	96.74	104.74	---	---	Peak

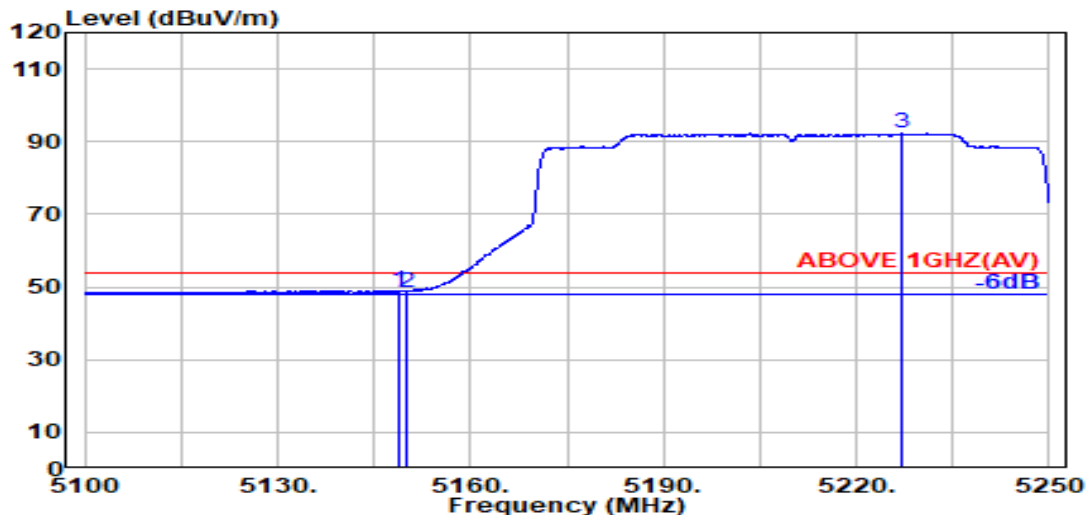

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.70	8.54	34.28	41.03	48.99	54.00	5.01	Average
5150.000	33.70	8.54	34.28	40.70	48.67	54.00	5.33	Average
@ 5227.200	33.75	8.59	34.26	84.14	92.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

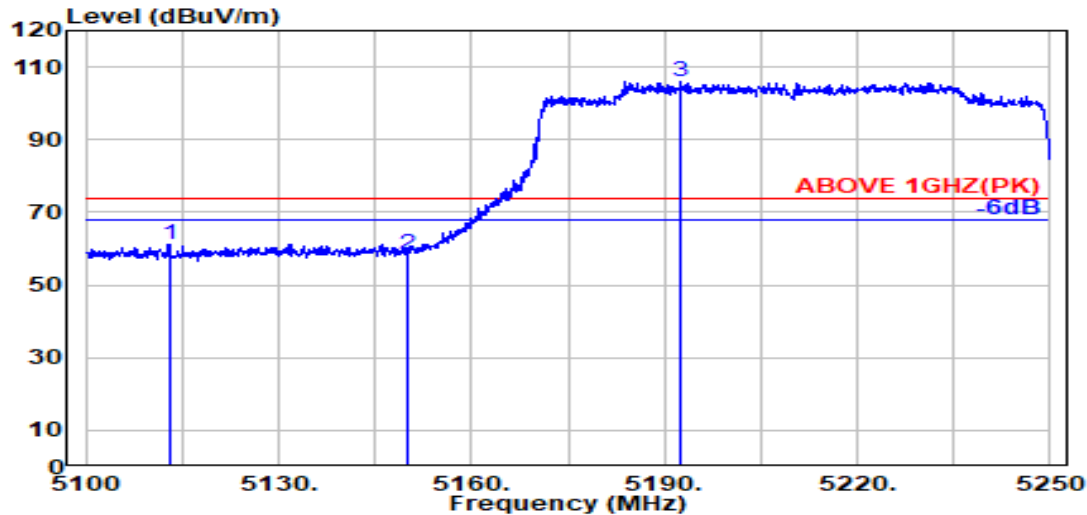

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.000	33.70	8.52	34.29	53.36	61.29	74.00	12.71	Peak
5150.000	33.70	8.54	34.28	50.54	58.51	74.00	15.49	Peak
@ 5192.500	33.70	8.57	34.27	97.88	105.88	---	---	Peak

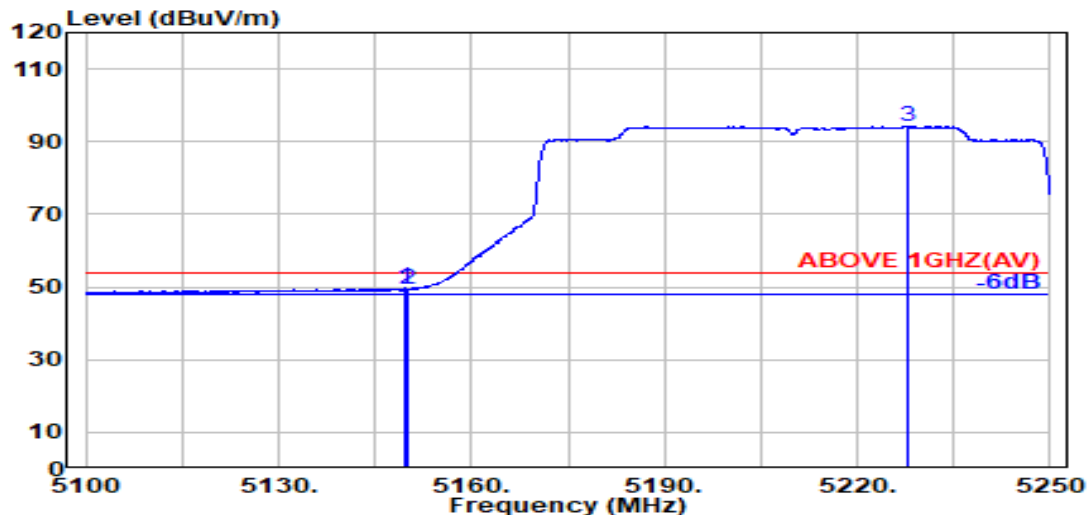

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.54	34.28	41.63	49.60	54.00	4.40	Average
5150.000	33.70	8.54	34.28	41.61	49.58	54.00	4.42	Average
@ 5227.700	33.76	8.59	34.26	86.10	94.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

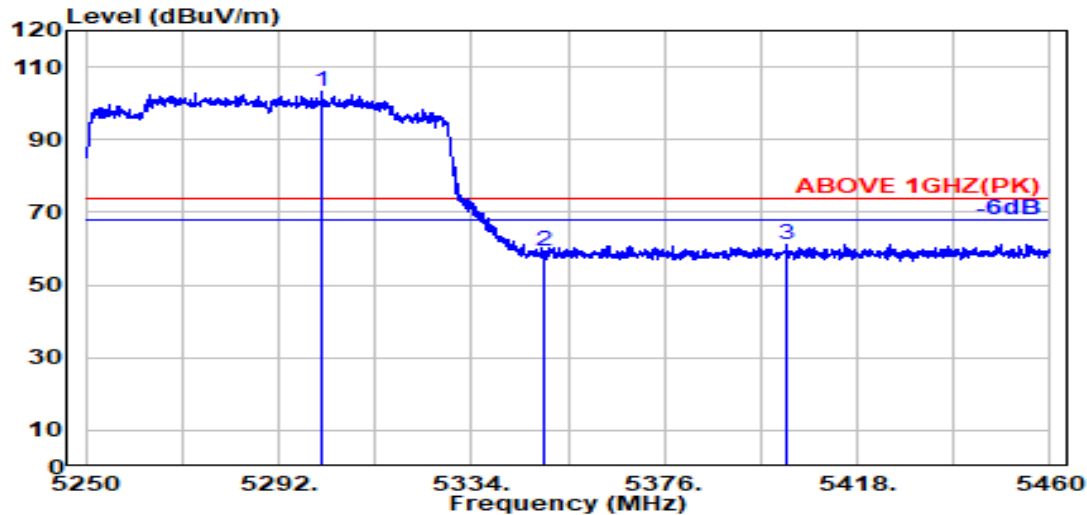

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.400	34.09	8.64	34.23	94.71	103.21	---	---	Peak
5350.000	33.90	8.67	34.22	50.92	59.27	74.00	14.73	Peak
5402.700	34.11	8.70	34.20	52.75	61.35	74.00	12.65	Peak

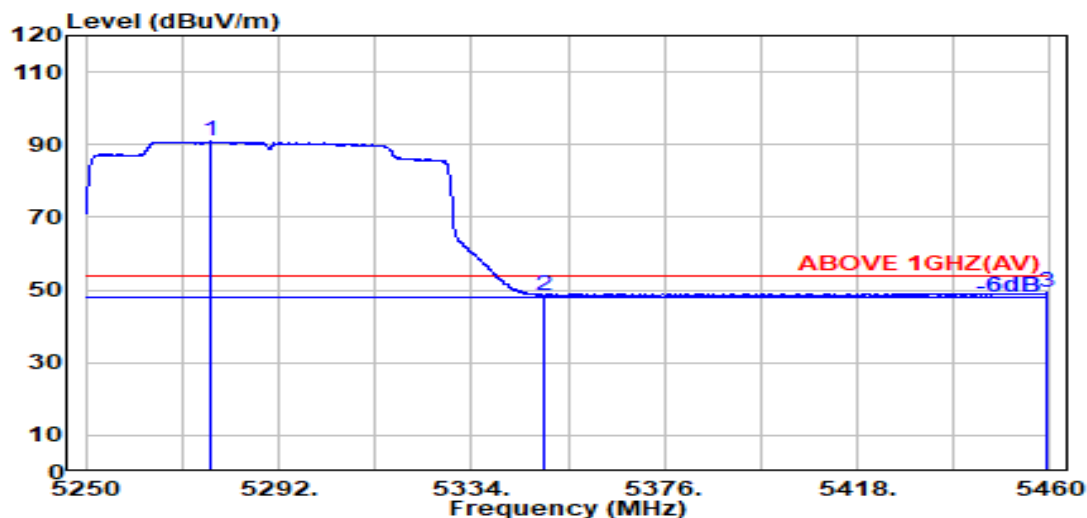

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.100	33.96	8.62	34.24	82.53	90.88	---	---	Average
5350.000	33.90	8.67	34.22	40.21	48.56	54.00	5.44	Average
5459.200	34.18	8.73	34.18	40.42	49.15	54.00	4.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

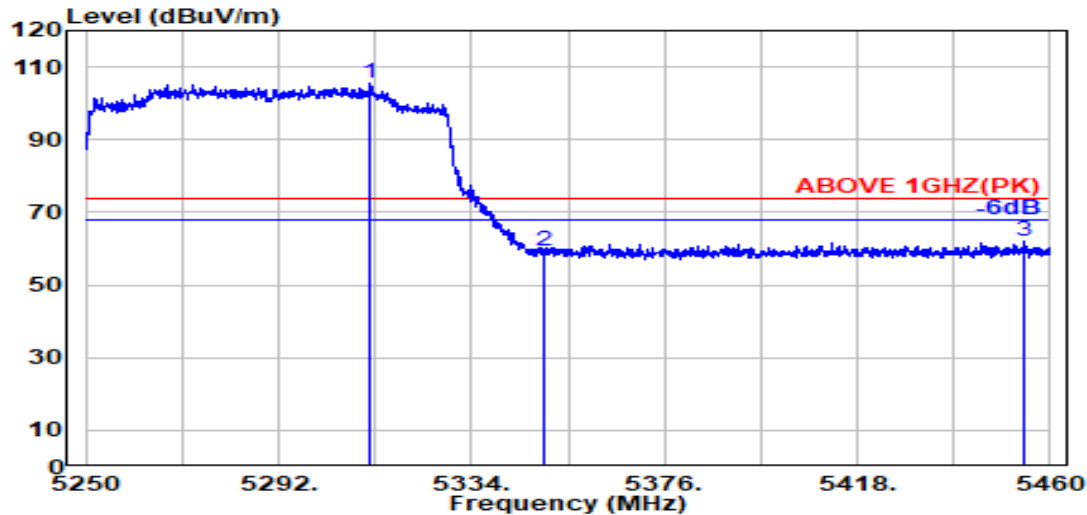

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.000	34.05	8.64	34.23	96.93	105.40	---	---	Peak
5350.000	33.90	8.67	34.22	50.92	59.27	74.00	14.73	Peak
5454.500	34.19	8.73	34.18	53.42	62.15	74.00	11.85	Peak

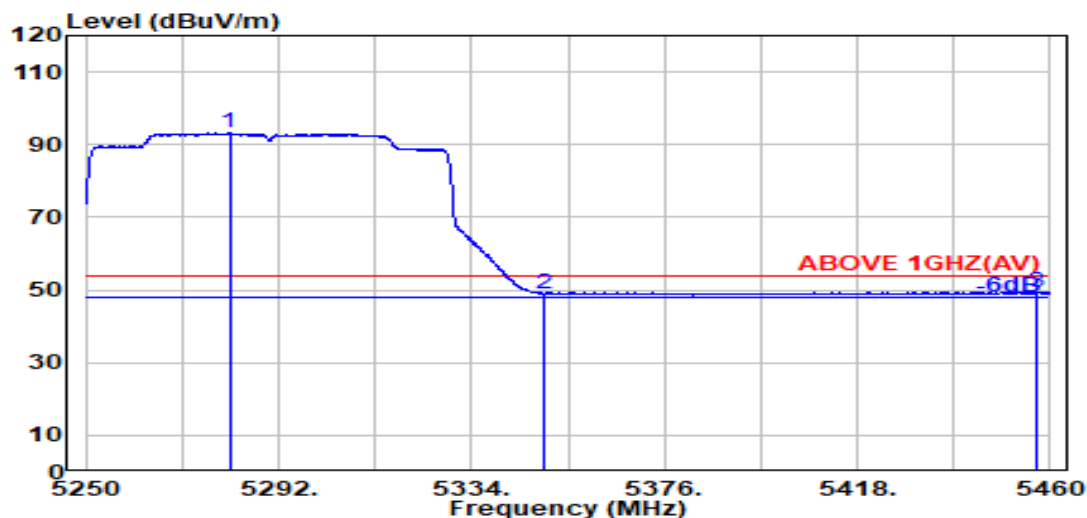

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.300	33.99	8.62	34.24	84.72	93.09	---	---	Average
5350.000	33.90	8.67	34.22	40.77	49.12	54.00	4.88	Average
5456.900	34.19	8.73	34.18	40.75	49.48	54.00	4.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

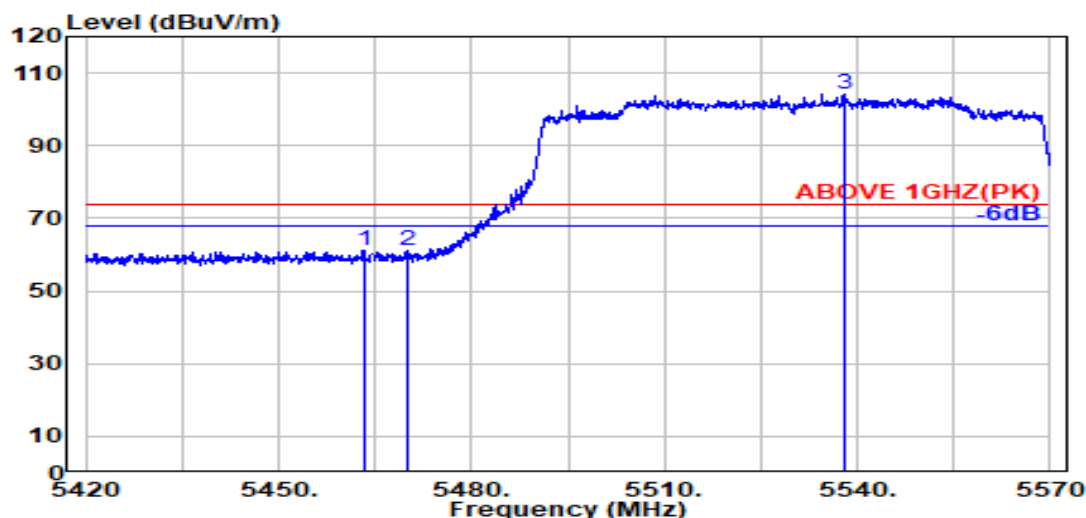

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.200	34.17	8.73	34.18	52.43	61.16	74.00	12.84	Peak
5470.000	34.16	8.74	34.18	52.23	60.95	74.00	13.05	Peak
@ 5537.900	34.10	8.78	34.19	95.43	104.11	---	---	Peak

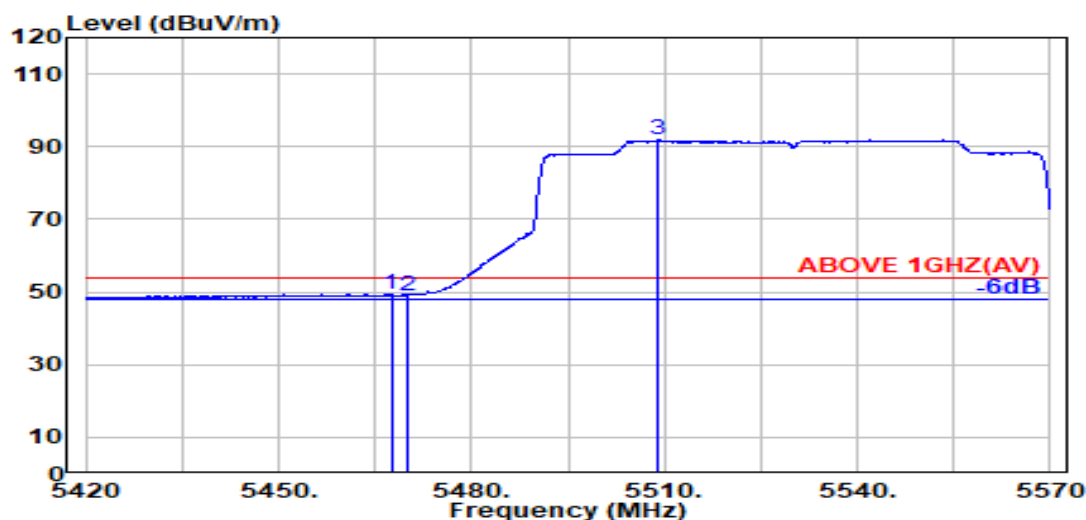

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.16	8.73	34.18	40.66	49.38	54.00	4.62	Average
5470.000	34.16	8.74	34.18	40.37	49.09	54.00	4.91	Average
@ 5509.100	34.10	8.76	34.17	83.18	91.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

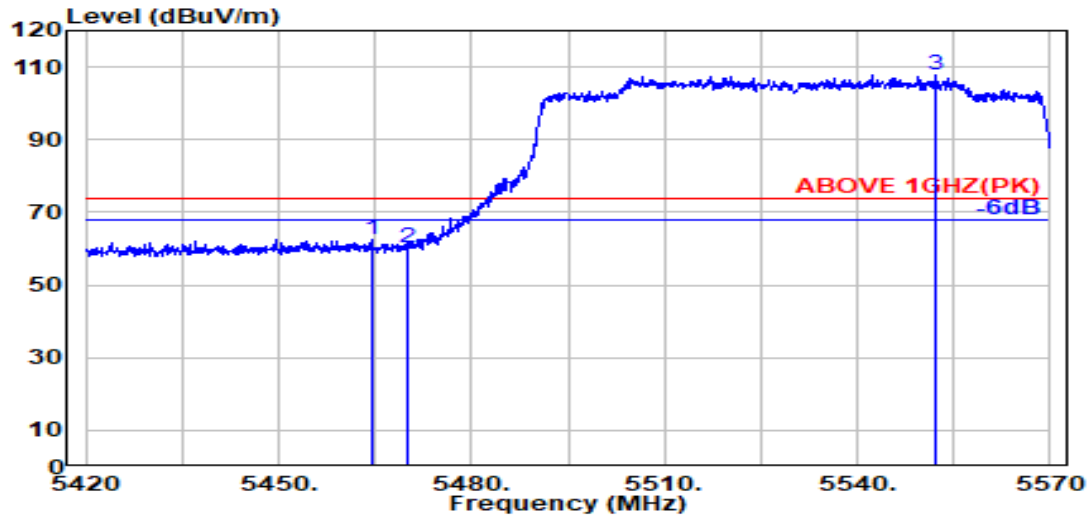

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.17	8.73	34.18	53.62	62.35	74.00	11.65	Peak
5470.000	34.16	8.74	34.18	51.44	60.15	74.00	13.85	Peak
@ 5552.200	34.10	8.78	34.19	99.10	107.78	---	---	Peak

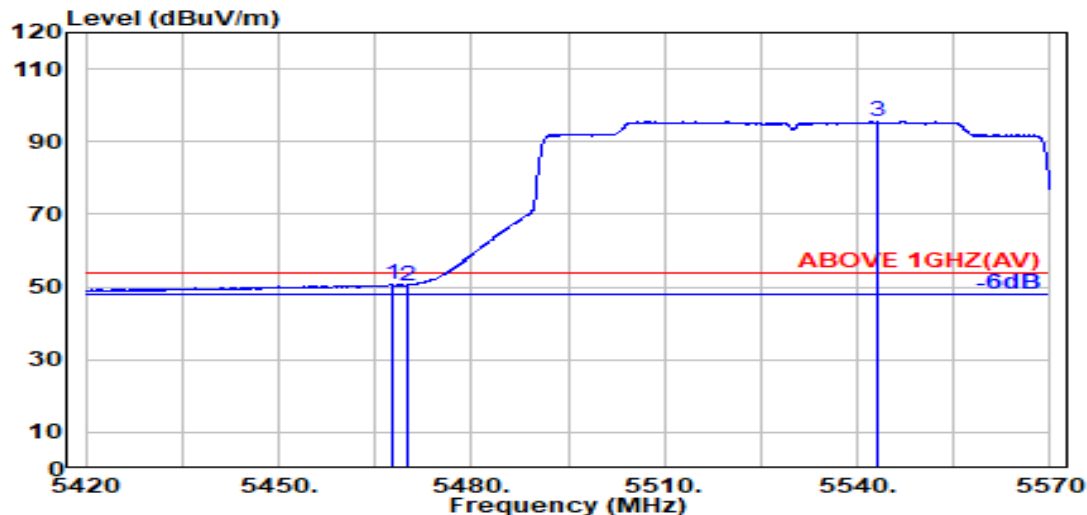

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.18	41.86	50.58	54.00	3.42	Average
5470.000	34.16	8.74	34.18	41.70	50.42	54.00	3.58	Average
@ 5543.300	34.10	8.78	34.19	86.79	95.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

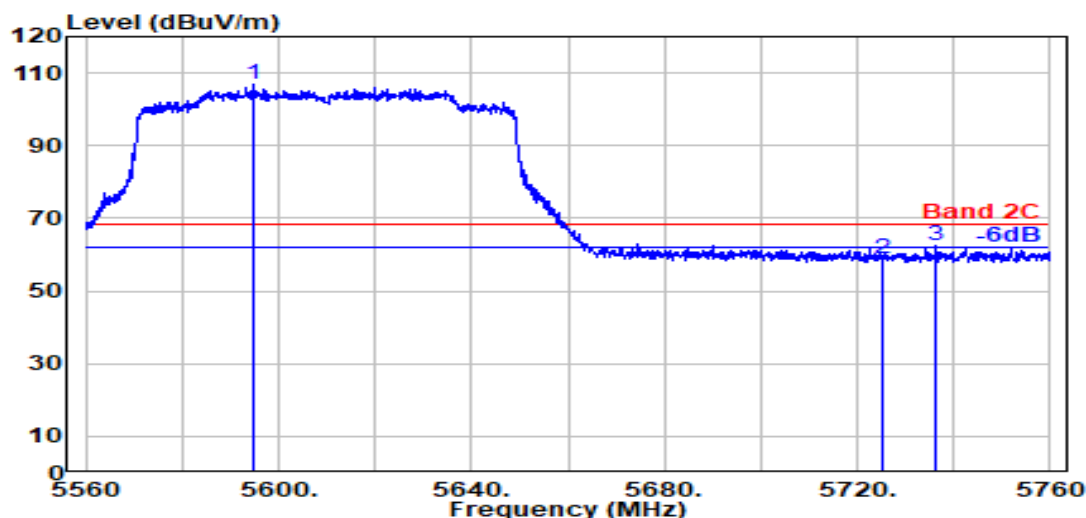

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5594.900	34.01	8.81	34.22	98.16	106.76	---	---	Peak
5725.000	33.80	8.88	34.28	50.44	58.84	68.20	9.36	Peak
5736.400	33.80	8.89	34.28	54.29	62.70	68.20	5.50	Peak

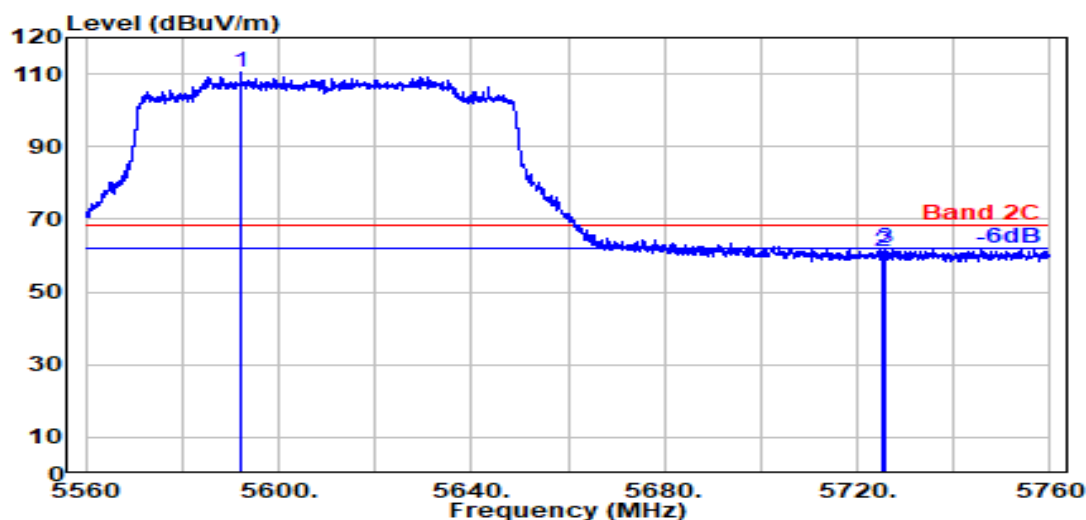

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.000	34.02	8.81	34.21	102.01	110.62	---	---	Peak
5725.000	33.80	8.88	34.28	52.69	61.09	68.20	7.11	Peak
5726.000	33.80	8.88	34.28	53.65	62.06	68.20	6.14	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

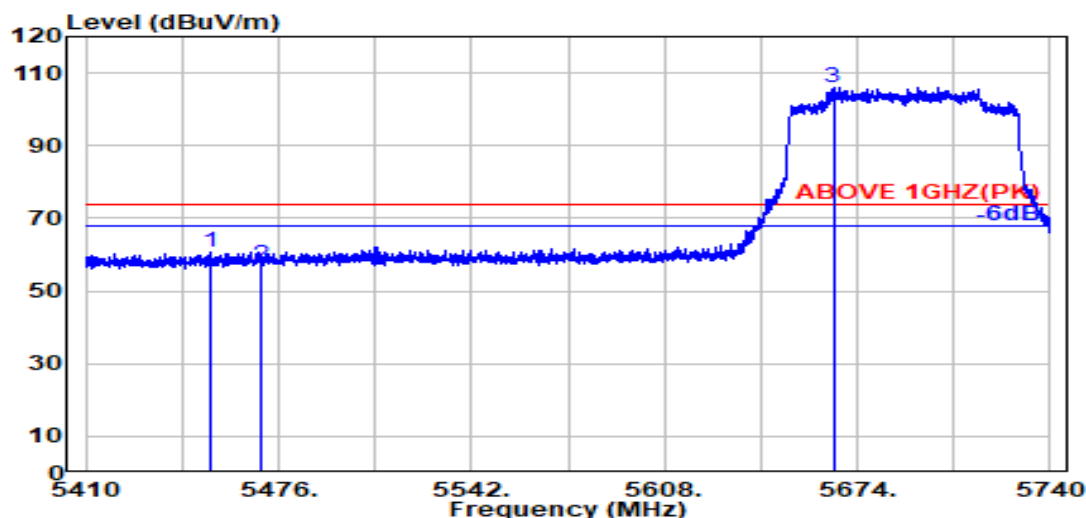

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.400	34.20	8.73	34.18	52.09	60.83	74.00	13.17	Peak
5470.000	34.16	8.74	34.18	48.44	57.16	74.00	16.84	Peak
@ 5665.800	33.94	8.85	34.25	97.45	105.98	---	---	Peak

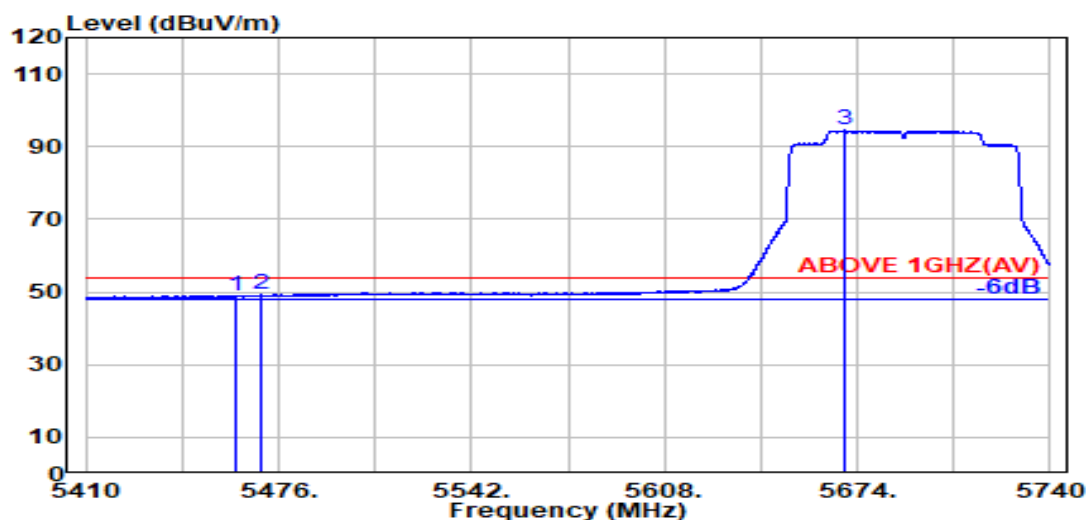

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.18	8.73	34.18	40.40	49.12	54.00	4.88	Average
5470.000	34.16	8.74	34.18	40.44	49.15	54.00	4.85	Average
@ 5669.700	33.92	8.85	34.25	85.93	94.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

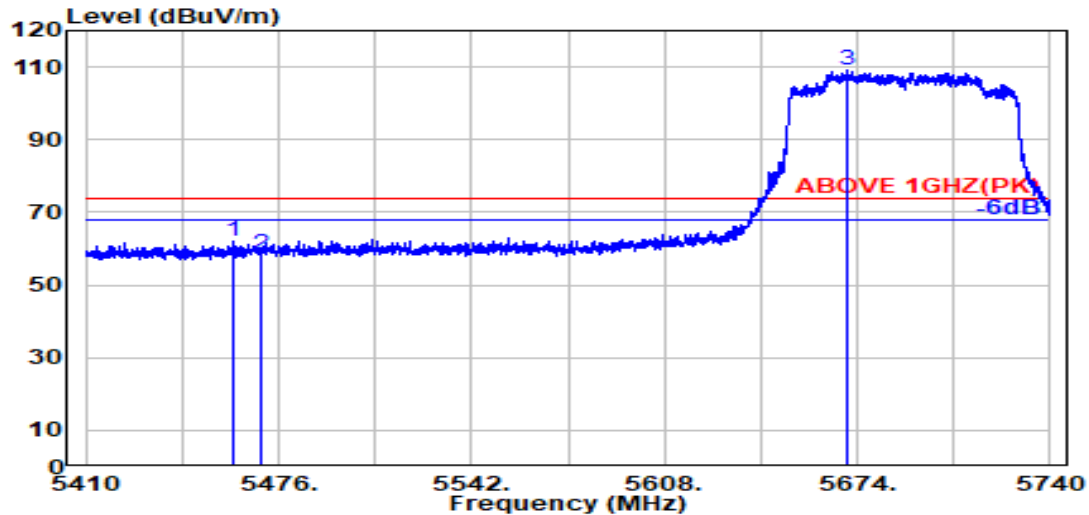

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.600	34.18	8.73	34.18	53.16	61.88	74.00	12.12	Peak
5470.000	34.16	8.74	34.18	49.91	58.63	74.00	15.37	Peak
@ 5670.200	33.92	8.85	34.25	100.52	109.03	---	---	Peak

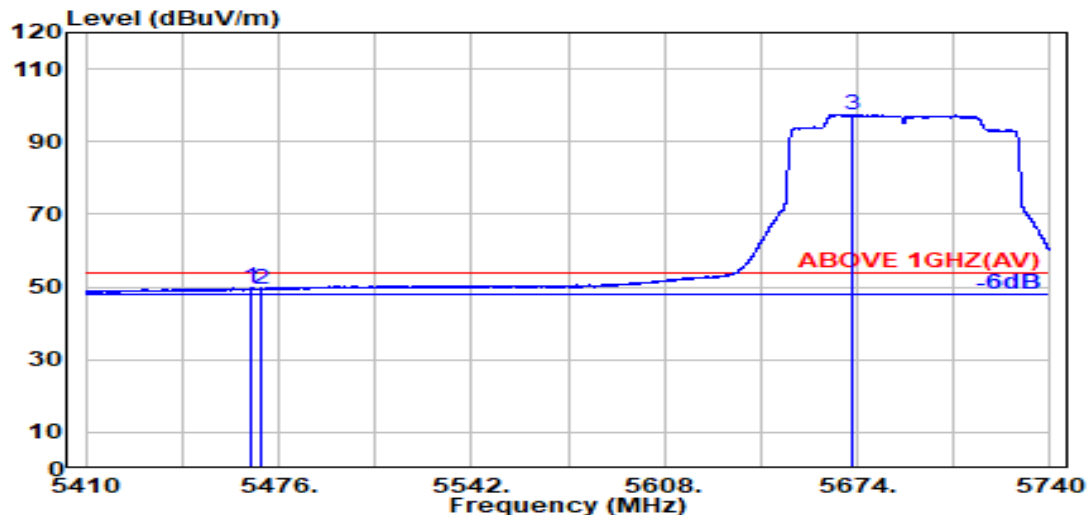

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	40.96	49.68	54.00	4.32	Average
5470.000	34.16	8.74	34.18	40.73	49.45	54.00	4.55	Average
@ 5672.200	33.91	8.85	34.25	88.90	97.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

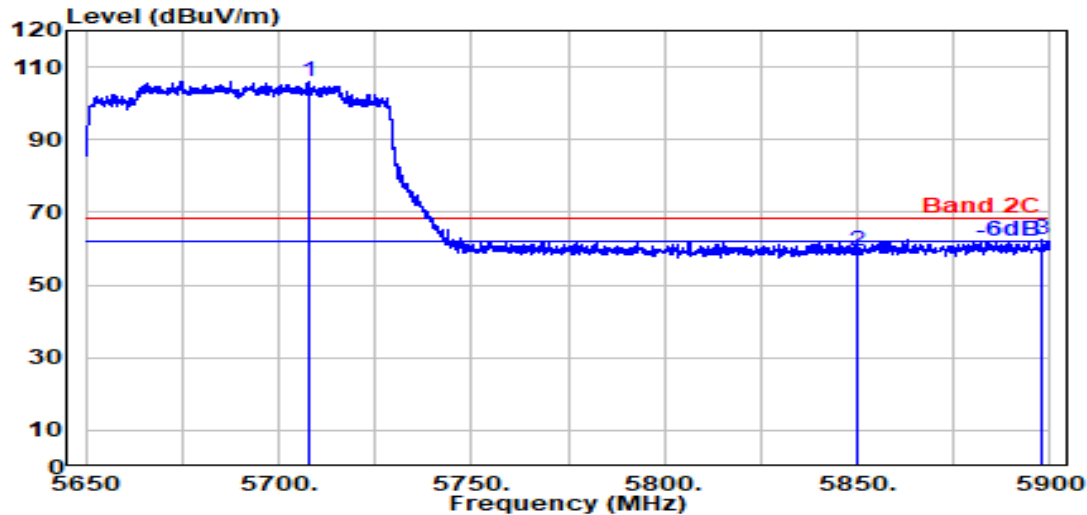

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.800	33.80	8.87	34.27	97.48	105.88	---	---	Peak
5850.000	34.10	8.95	34.33	50.72	59.44	68.20	8.76	Peak
5898.000	34.10	8.98	34.35	53.88	62.60	68.20	5.60	Peak

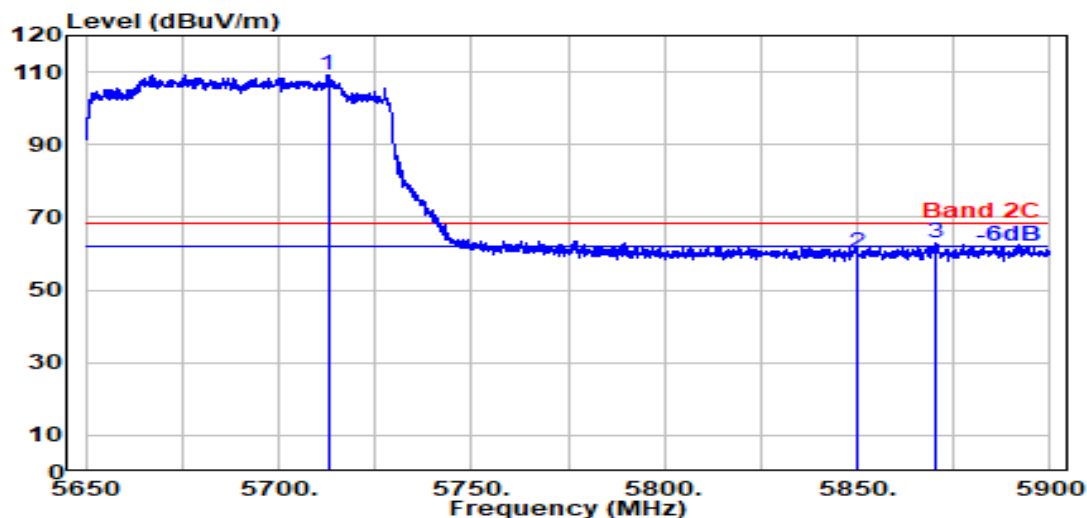


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.800	33.80	8.87	34.27	100.80	109.20	---	---	Peak
5850.000	34.10	8.95	34.33	51.44	60.16	68.20	8.04	Peak
5870.600	34.10	8.96	34.34	54.01	62.72	68.20	5.48	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

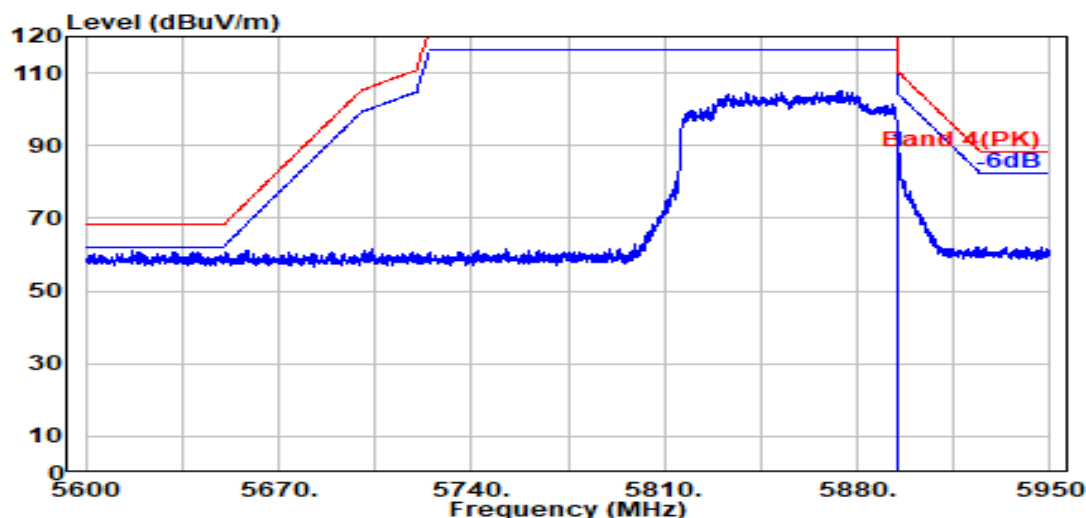

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	79.70	88.42	110.16	21.75	Peak

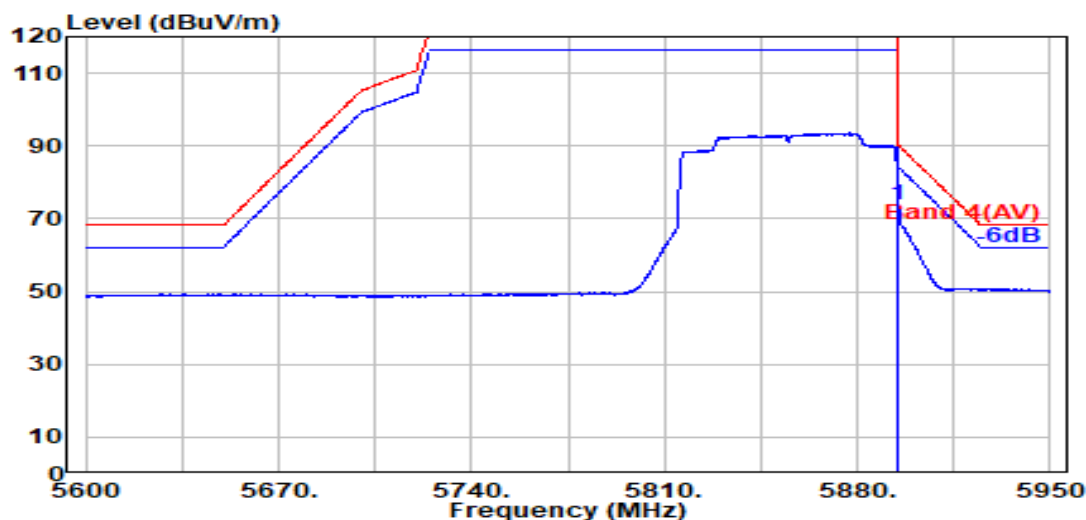

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	65.25	73.97	110.16	21.75	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

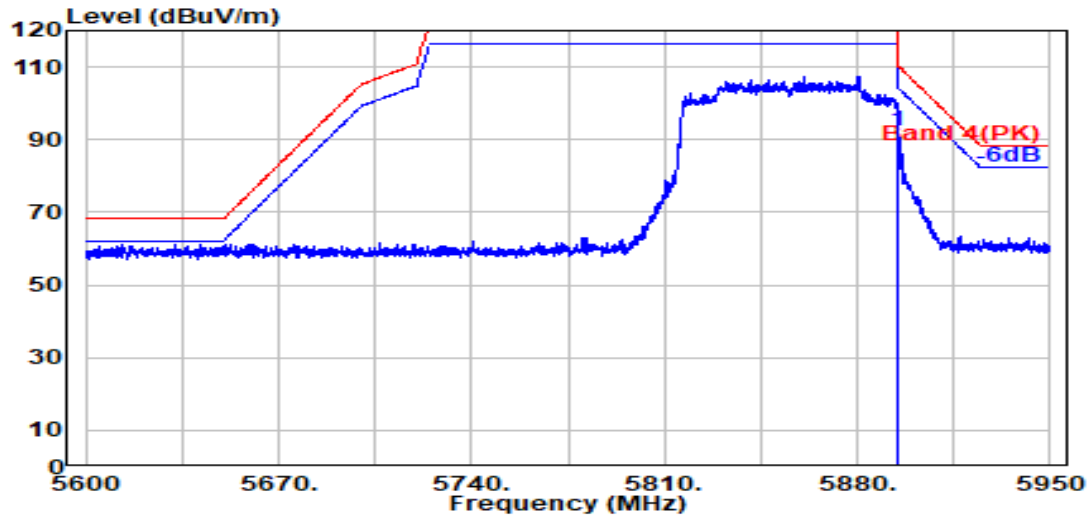

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	83.54	92.26	110.16	17.90	Peak

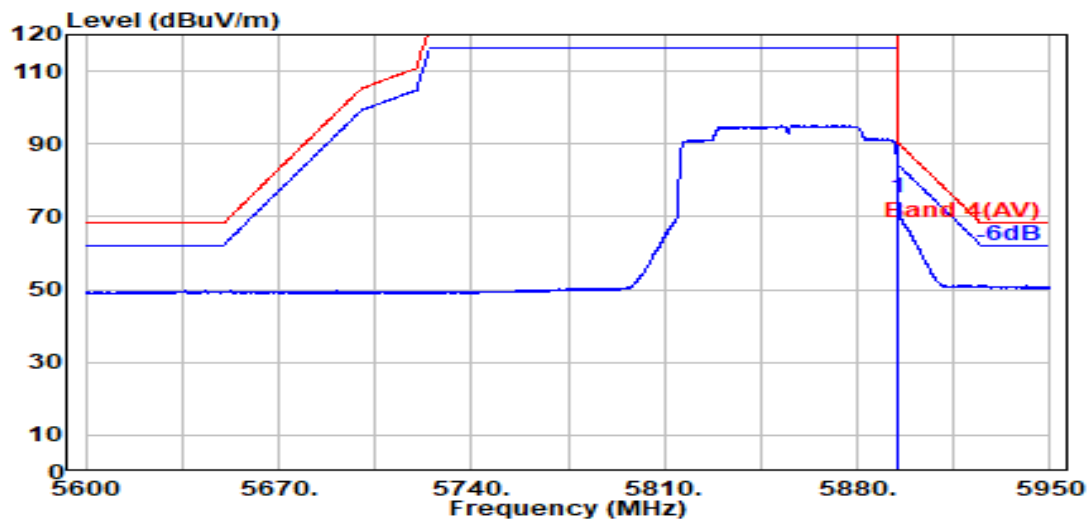

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	66.24	74.96	90.16	15.20	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

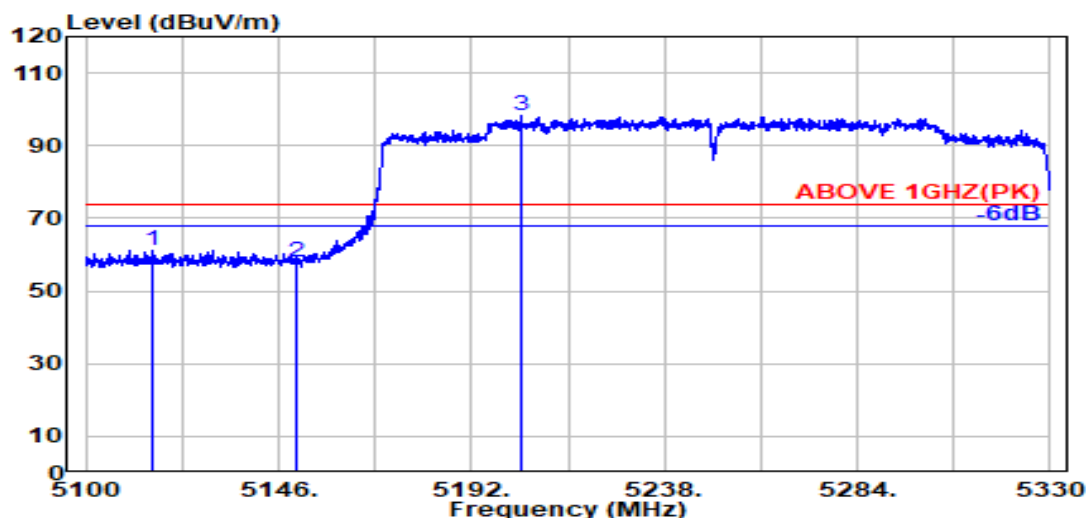

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.800	33.70	8.52	34.29	53.17	61.10	74.00	12.90	Peak
5150.000	33.70	8.54	34.28	49.79	57.76	74.00	16.24	Peak
@ 5203.700	33.71	8.58	34.26	90.16	98.18	---	---	Peak

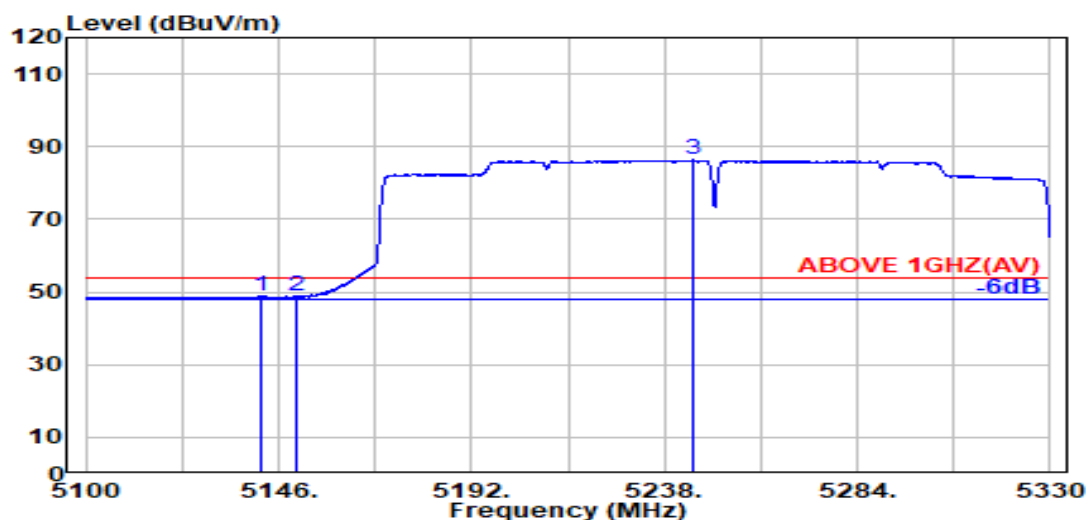

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.600	33.70	8.54	34.28	40.86	48.82	54.00	5.18	Average
5150.000	33.70	8.54	34.28	40.75	48.72	54.00	5.28	Average
@ 5244.600	33.79	8.60	34.25	78.13	86.27	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

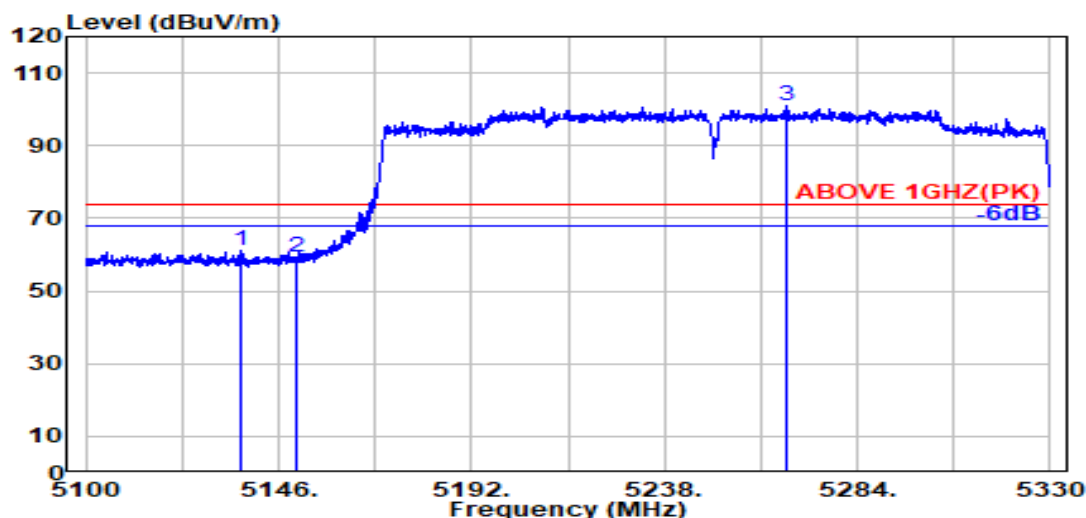

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.200	33.70	8.54	34.28	53.23	61.18	74.00	12.82	Peak
5150.000	33.70	8.54	34.28	51.53	59.49	74.00	14.51	Peak
@ 5267.100	33.90	8.62	34.24	92.56	100.83	---	---	Peak

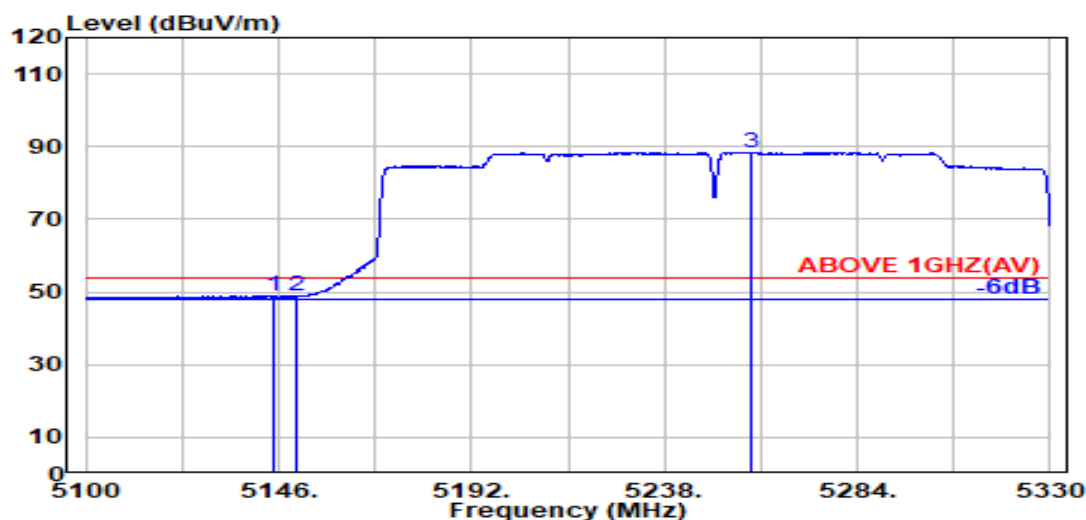

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.600	33.70	8.54	34.28	41.05	49.01	54.00	4.99	Average
5150.000	33.70	8.54	34.28	40.83	48.80	54.00	5.20	Average
@ 5258.600	33.85	8.61	34.25	80.29	88.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

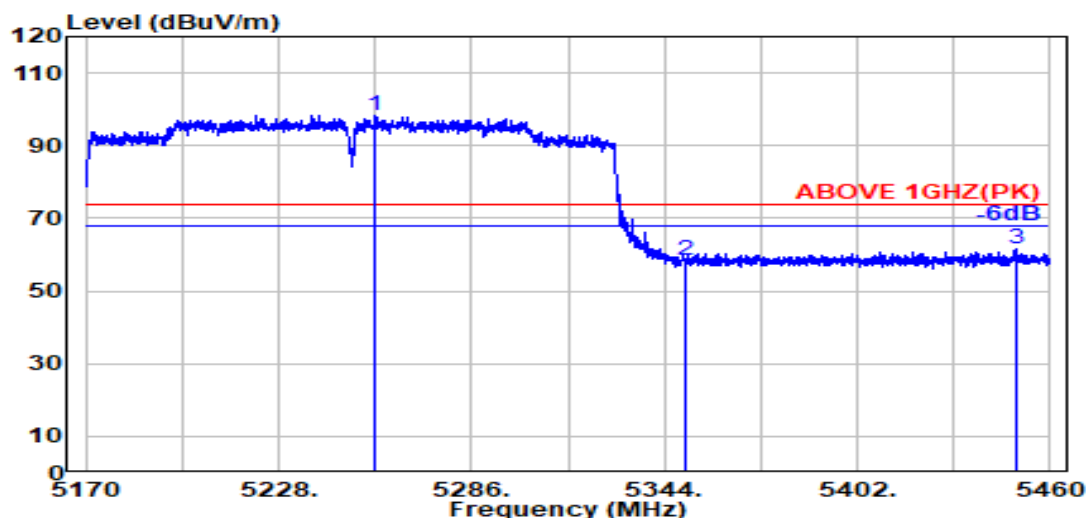

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5256.900	33.84	8.61	34.25	90.28	98.48	---	---	Peak
5350.000	33.90	8.67	34.22	50.08	58.43	74.00	15.57	Peak
5449.800	34.20	8.72	34.19	52.85	61.59	74.00	12.41	Peak

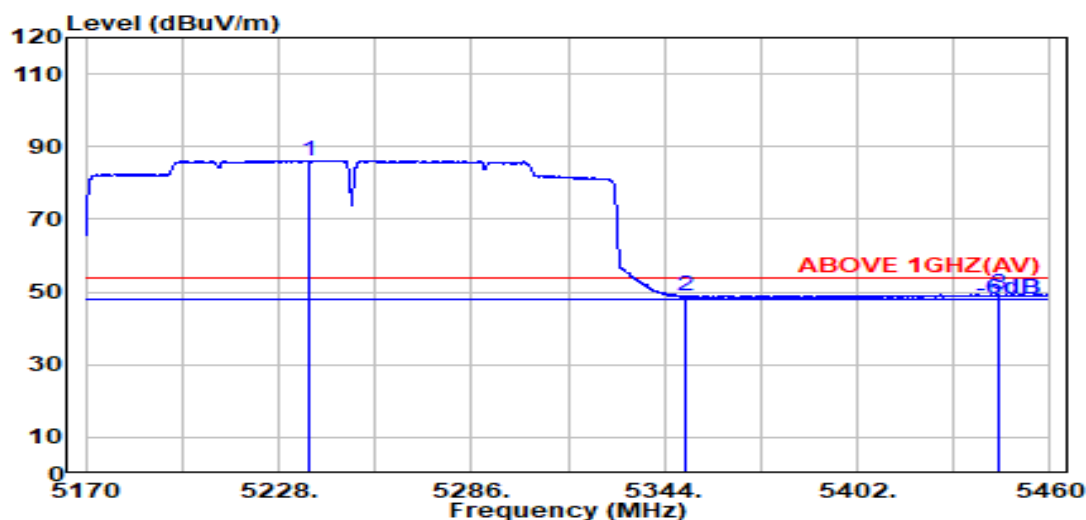

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5237.200	33.77	8.60	34.25	78.07	86.19	---	---	Average
5350.000	33.90	8.67	34.22	40.50	48.85	54.00	5.15	Average
5444.600	34.19	8.72	34.19	40.59	49.31	54.00	4.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

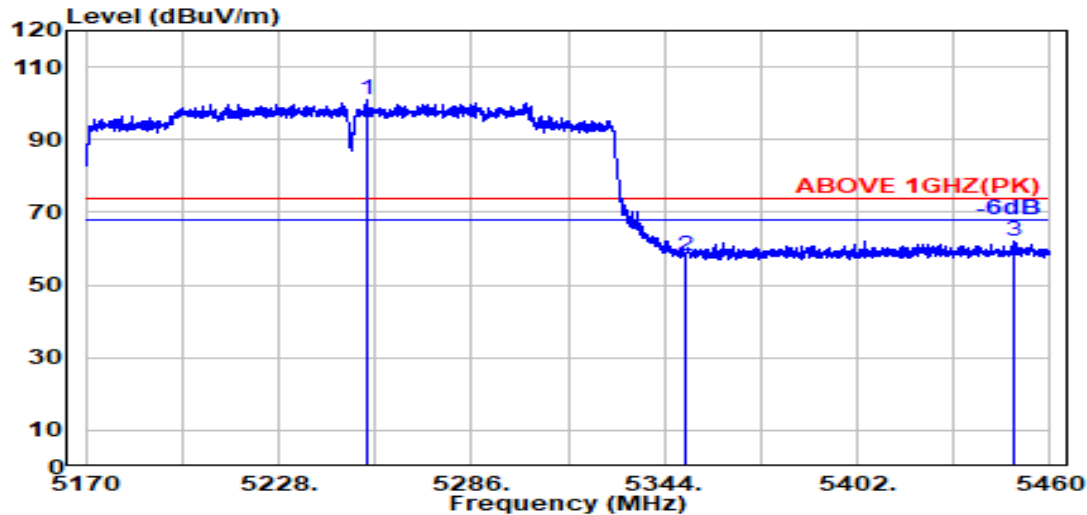

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5254.300	33.83	8.61	34.25	92.75	100.94	---	---	Peak
5350.000	33.90	8.67	34.22	49.72	58.07	74.00	15.93	Peak
5449.400	34.20	8.72	34.19	53.40	62.13	74.00	11.87	Peak

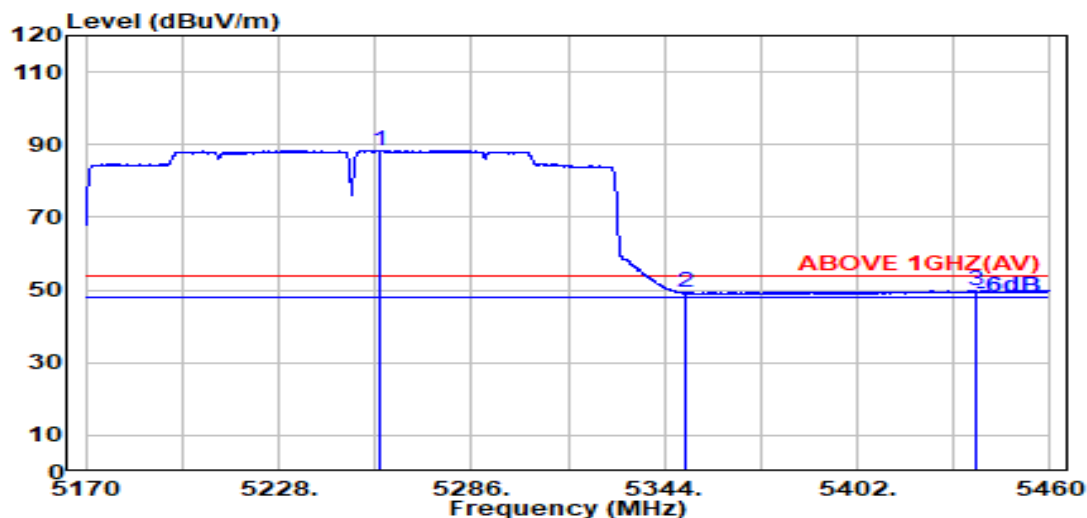

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5258.600	33.85	8.61	34.25	80.24	88.45	---	---	Average
5350.000	33.90	8.67	34.22	40.87	49.22	54.00	4.78	Average
5437.700	34.18	8.72	34.19	41.12	49.82	54.00	4.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

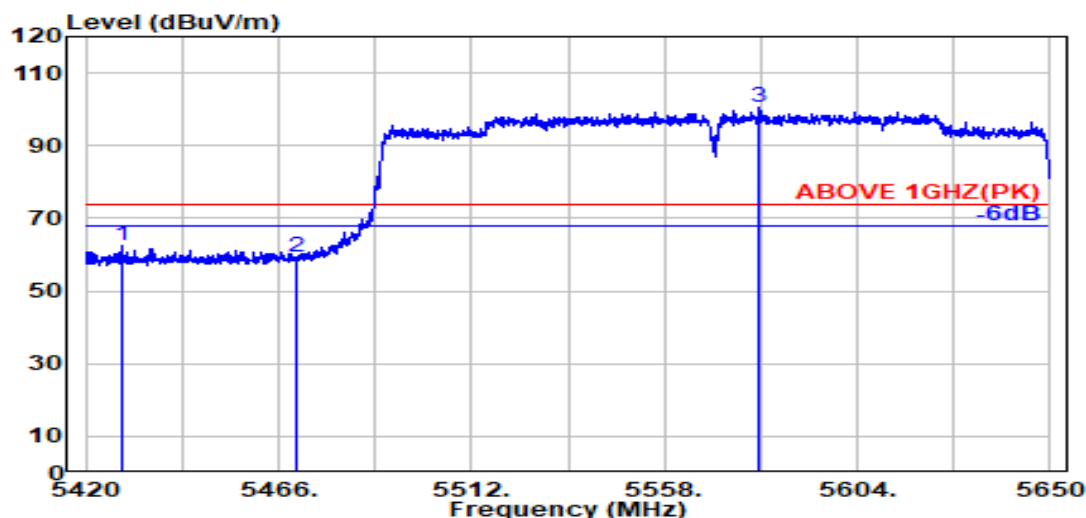

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.500	34.16	8.71	34.19	53.93	62.61	74.00	11.39	Peak
5470.000	34.16	8.74	34.18	50.53	59.24	74.00	14.76	Peak
@ 5580.600	34.04	8.80	34.21	91.79	100.42	---	---	Peak

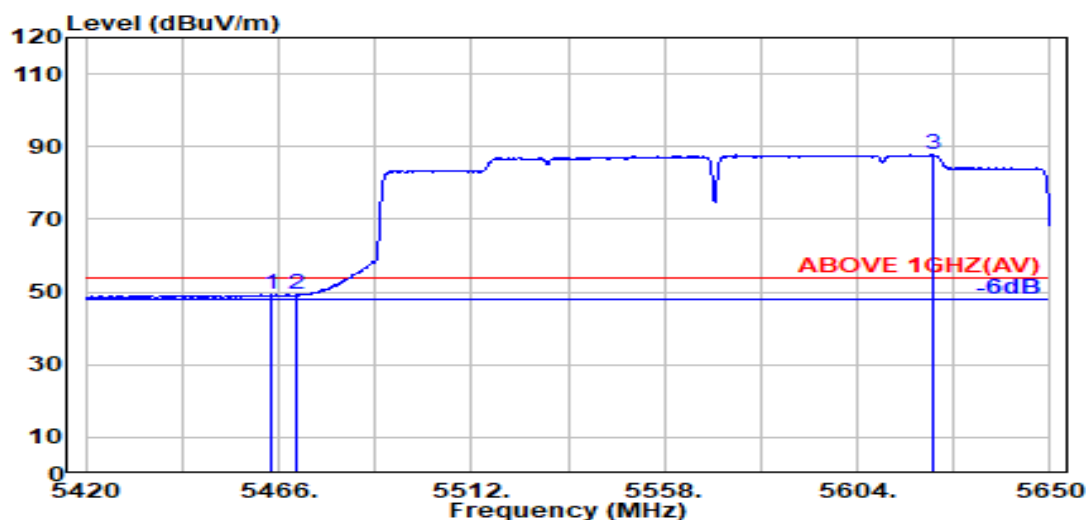

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.17	8.73	34.18	40.50	49.22	54.00	4.78	Average
5470.000	34.16	8.74	34.18	40.49	49.20	54.00	4.80	Average
@ 5621.900	34.00	8.82	34.23	79.18	87.78	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

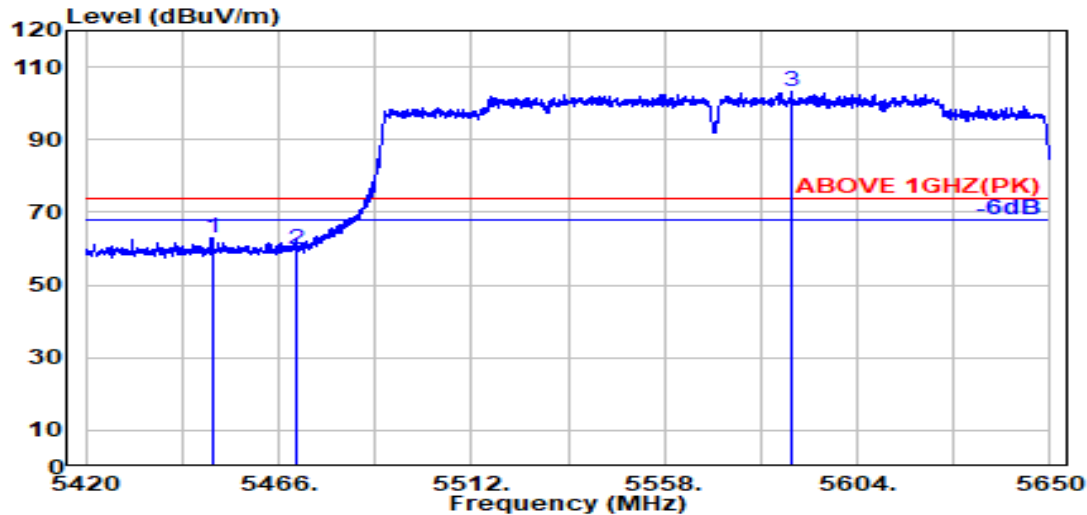

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.100	34.20	8.72	34.19	54.26	62.99	74.00	11.01	Peak
5470.000	34.16	8.74	34.18	51.10	59.82	74.00	14.18	Peak
@ 5588.300	34.02	8.80	34.21	94.65	103.26	---	---	Peak

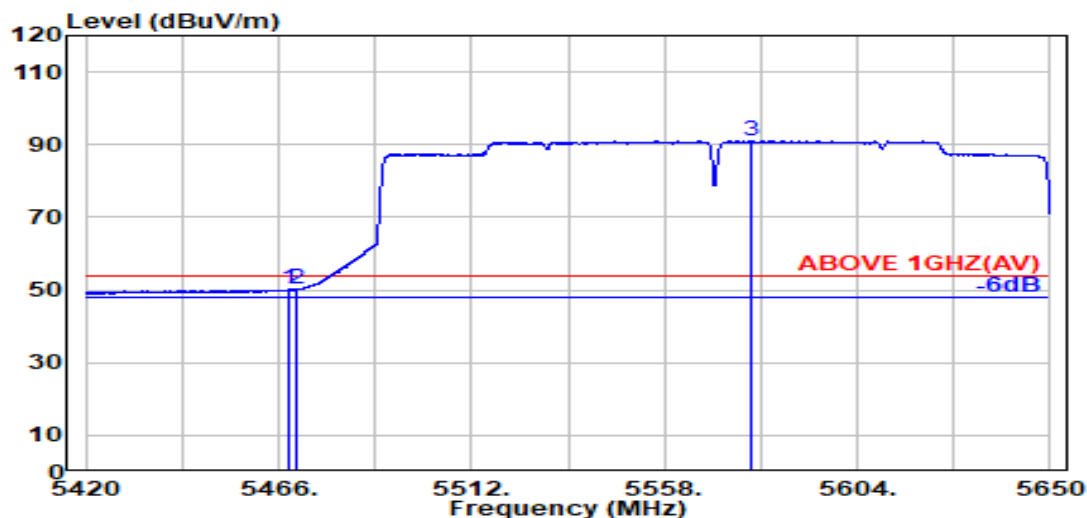

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	41.57	50.29	54.00	3.71	Average
5470.000	34.16	8.74	34.18	41.55	50.26	54.00	3.74	Average
@ 5578.600	34.04	8.80	34.21	82.44	91.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

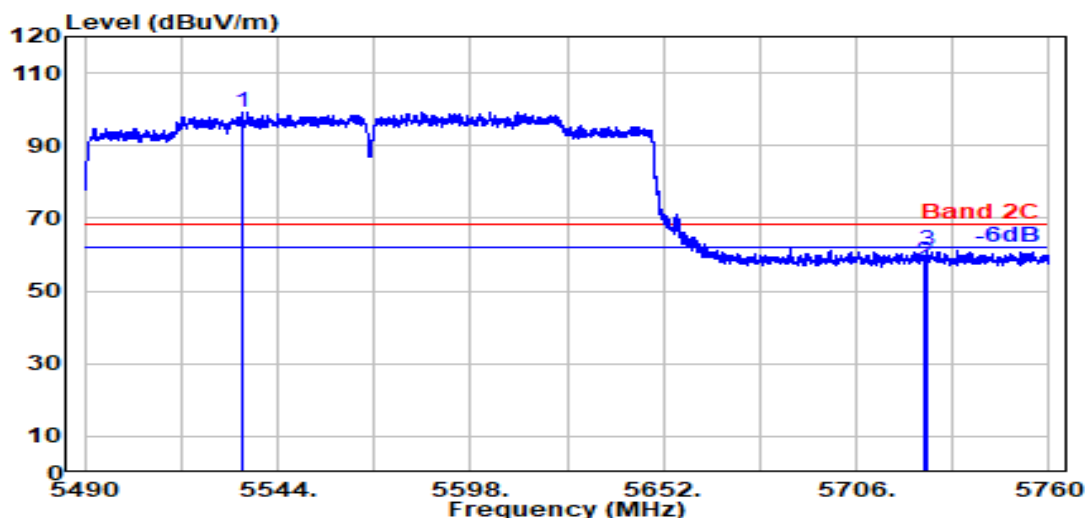

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5533.800	34.10	8.77	34.19	90.44	99.13	---	---	Peak
5725.000	33.80	8.88	34.28	49.35	57.75	68.20	10.45	Peak
5726.100	33.80	8.88	34.28	52.77	61.18	68.20	7.02	Peak

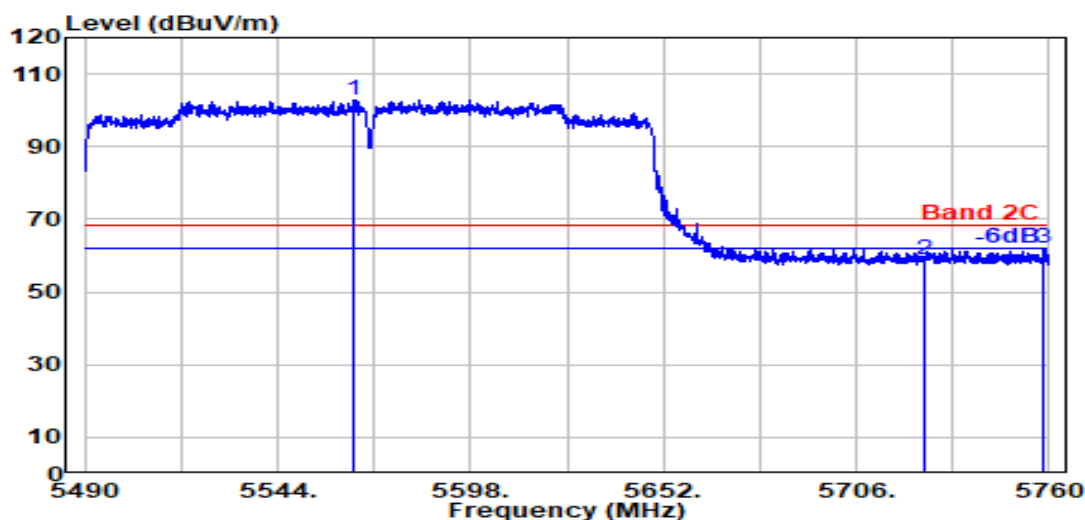

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5565.500	34.07	8.79	34.20	94.06	102.72	---	---	Peak
5725.000	33.80	8.88	34.28	50.39	58.79	68.20	9.41	Peak
5758.200	33.83	8.90	34.29	53.75	62.19	68.20	6.01	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

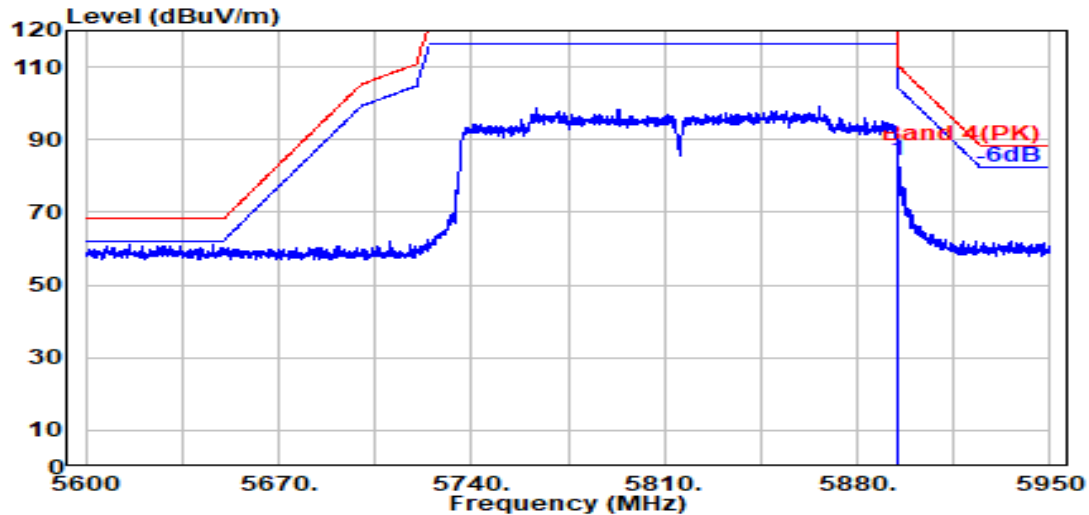

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	75.71	84.43	110.16	25.74	Peak

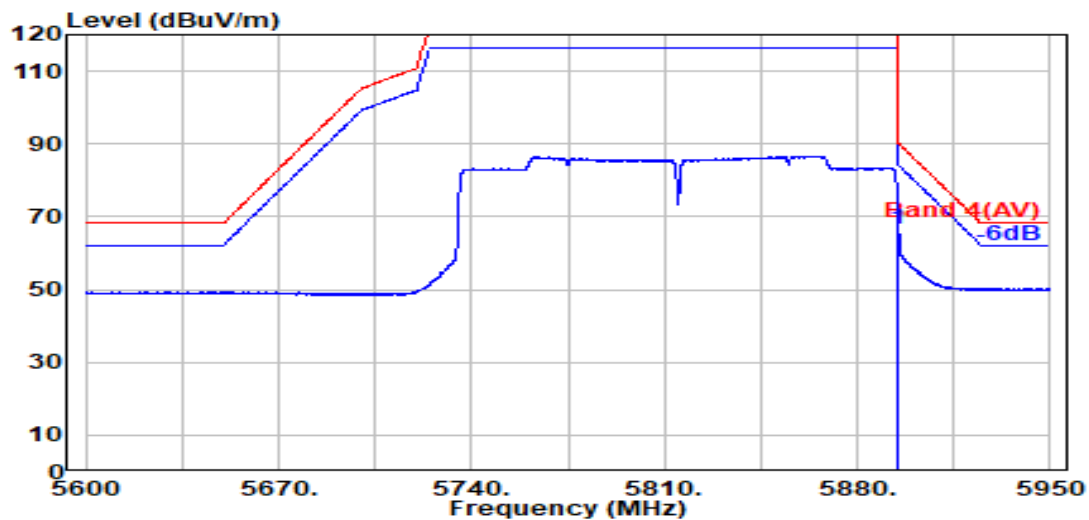

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	57.69	66.41	90.16	23.75	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

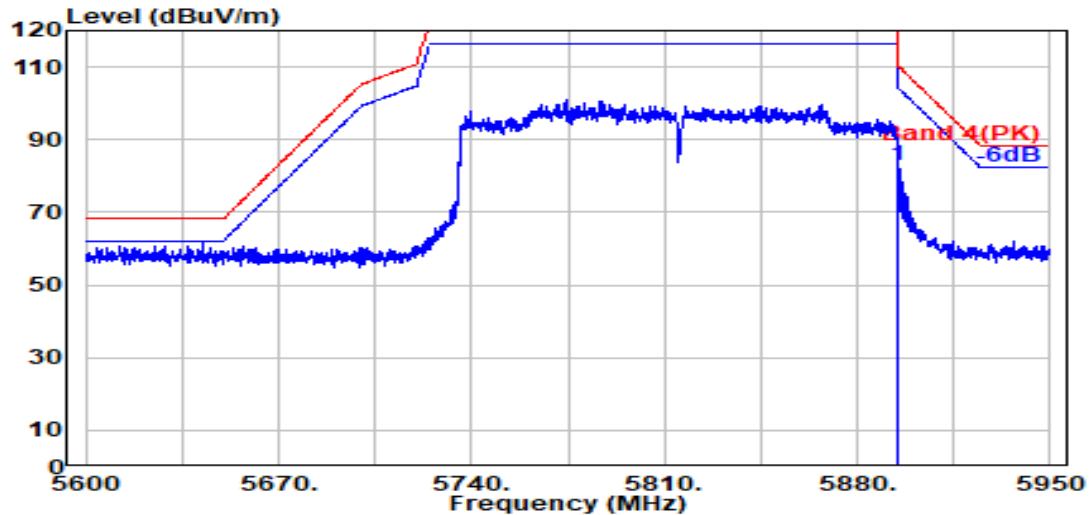

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	74.05	82.77	110.16	27.40	Peak

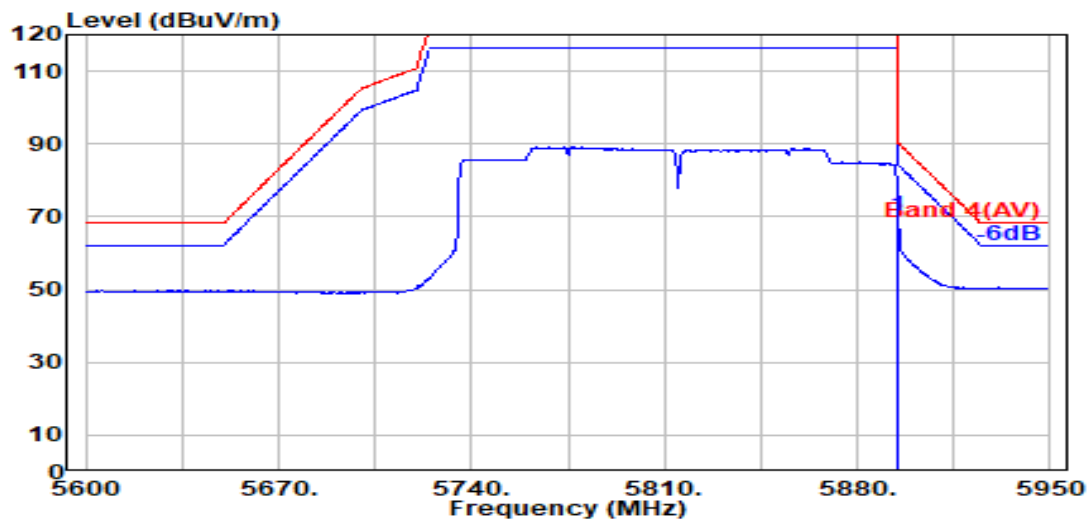

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	61.52	70.24	90.16	19.92	Average

Remark: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

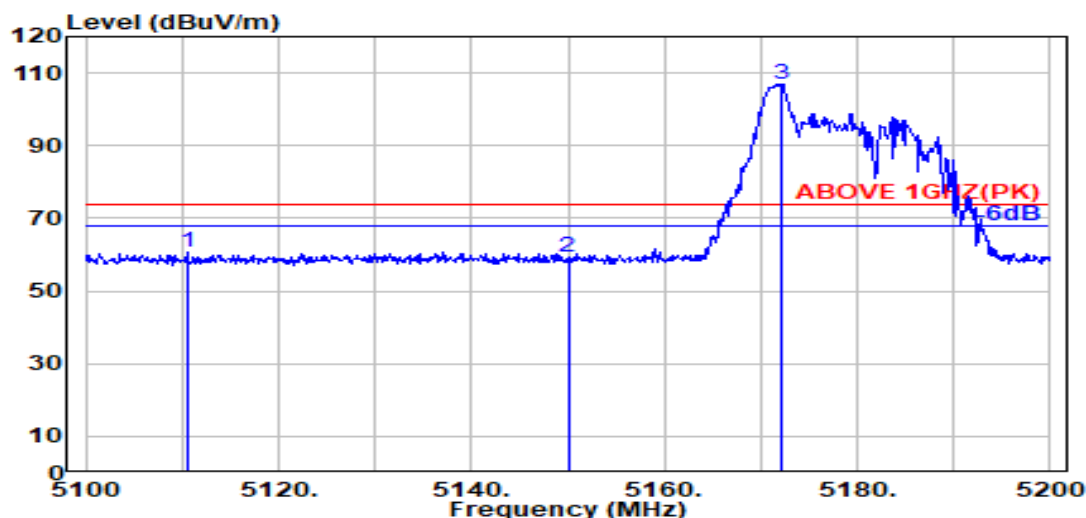

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.500	33.70	8.52	34.29	52.85	60.77	74.00	13.23	Peak
5150.000	33.70	8.54	34.28	51.24	59.20	74.00	14.80	Peak
@ 5172.100	33.70	8.56	34.27	99.09	107.08	---	---	Peak

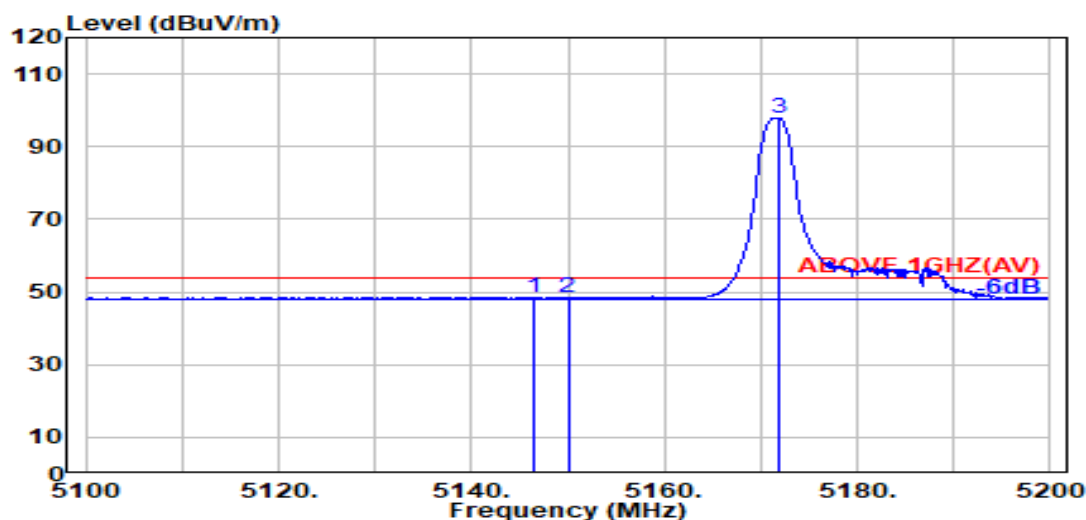

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	33.70	8.54	34.28	40.58	48.54	54.00	5.46	Average
5150.000	33.70	8.54	34.28	40.27	48.24	54.00	5.76	Average
@ 5171.900	33.70	8.56	34.27	90.05	98.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

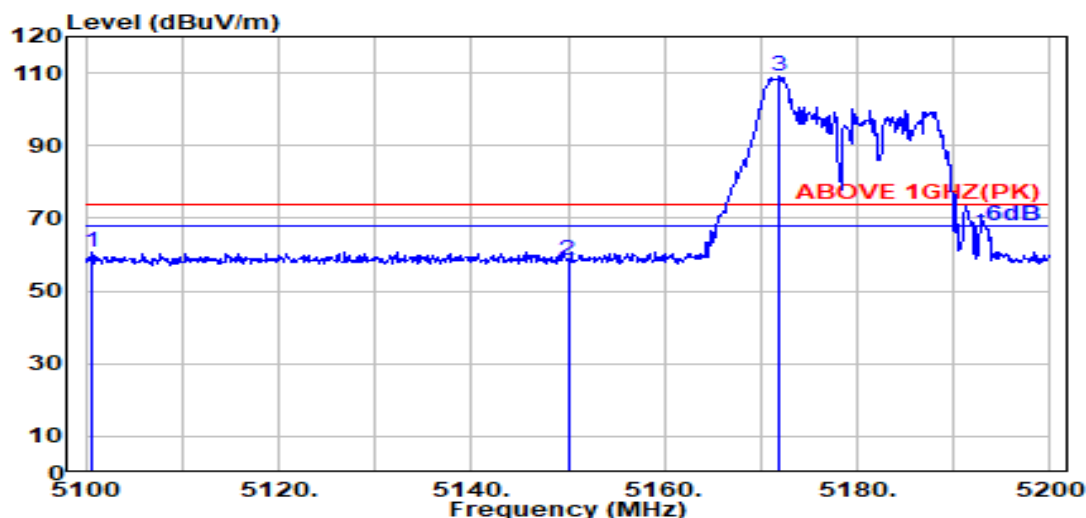

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.600	33.70	8.51	34.30	52.94	60.86	74.00	13.14	Peak
5150.000	33.70	8.54	34.28	50.55	58.52	74.00	15.48	Peak
@ 5172.000	33.70	8.56	34.27	101.13	109.11	---	---	Peak

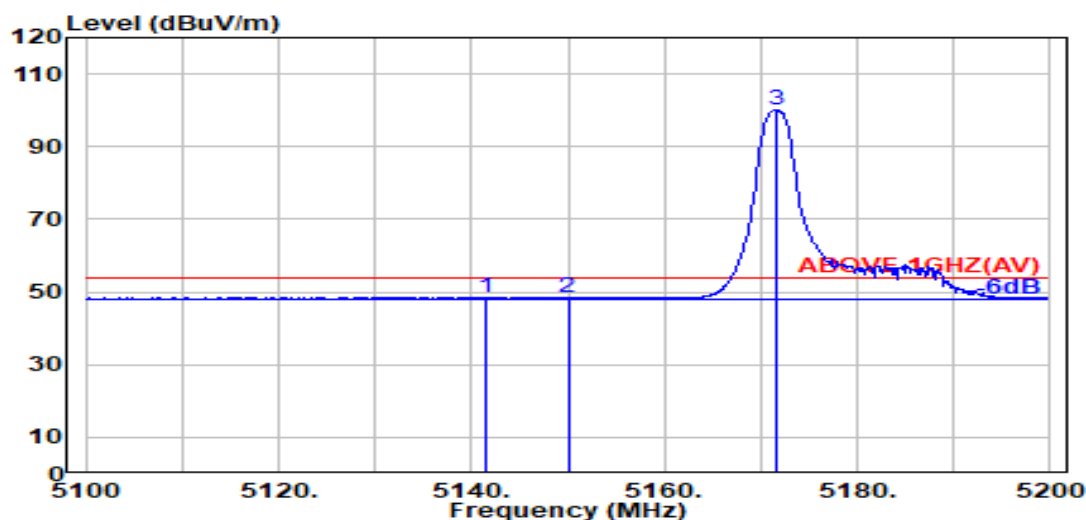

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.600	33.70	8.54	34.28	40.58	48.54	54.00	5.46	Average
5150.000	33.70	8.54	34.28	40.40	48.36	54.00	5.64	Average
@ 5171.500	33.70	8.56	34.27	92.08	100.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

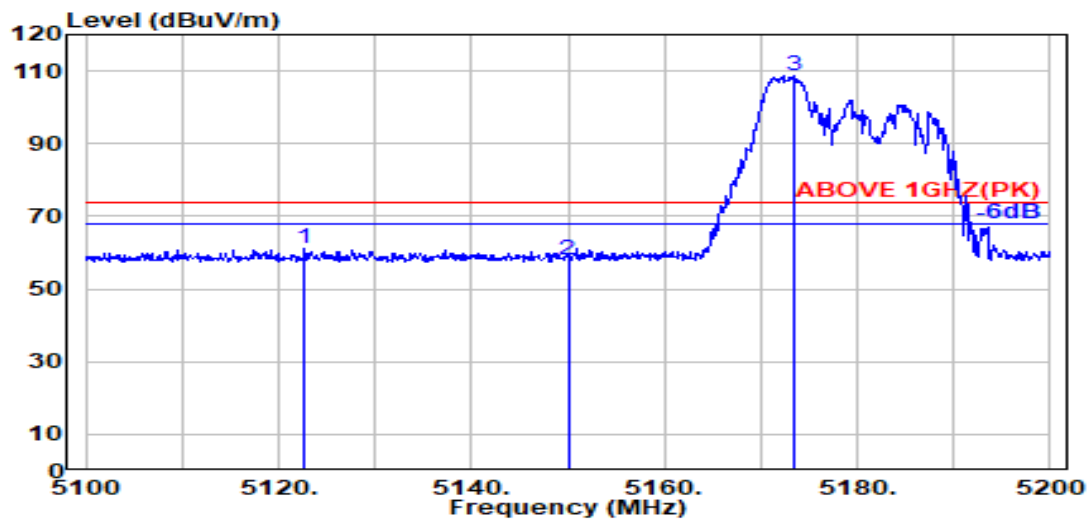

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.600	33.70	8.53	34.29	53.17	61.11	74.00	12.89	Peak
5150.000	33.70	8.54	34.28	50.14	58.10	74.00	15.90	Peak
@ 5173.500	33.70	8.56	34.27	100.87	108.85	---	---	Peak

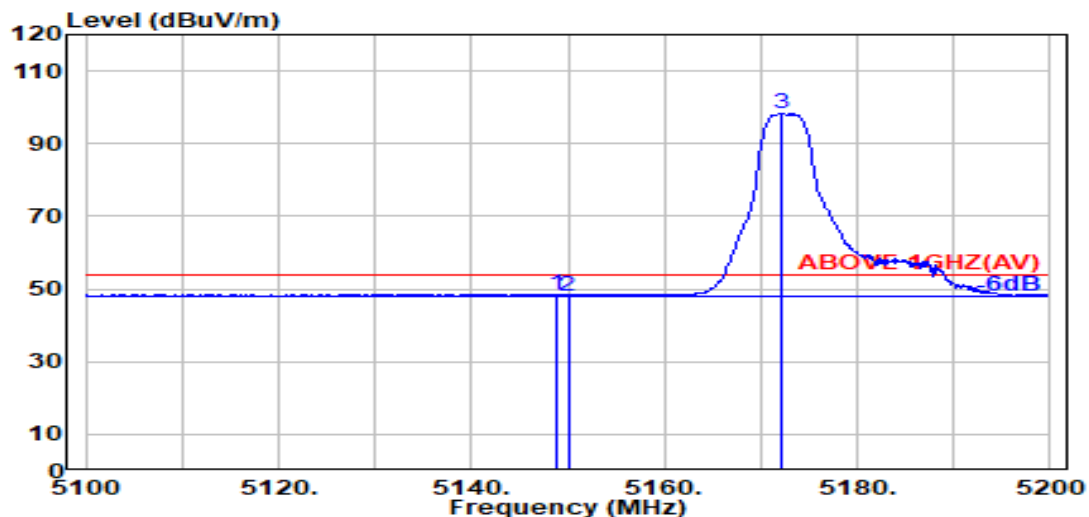

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.70	8.54	34.28	40.63	48.60	54.00	5.40	Average
5150.000	33.70	8.54	34.28	40.24	48.21	54.00	5.79	Average
@ 5172.100	33.70	8.56	34.27	90.37	98.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

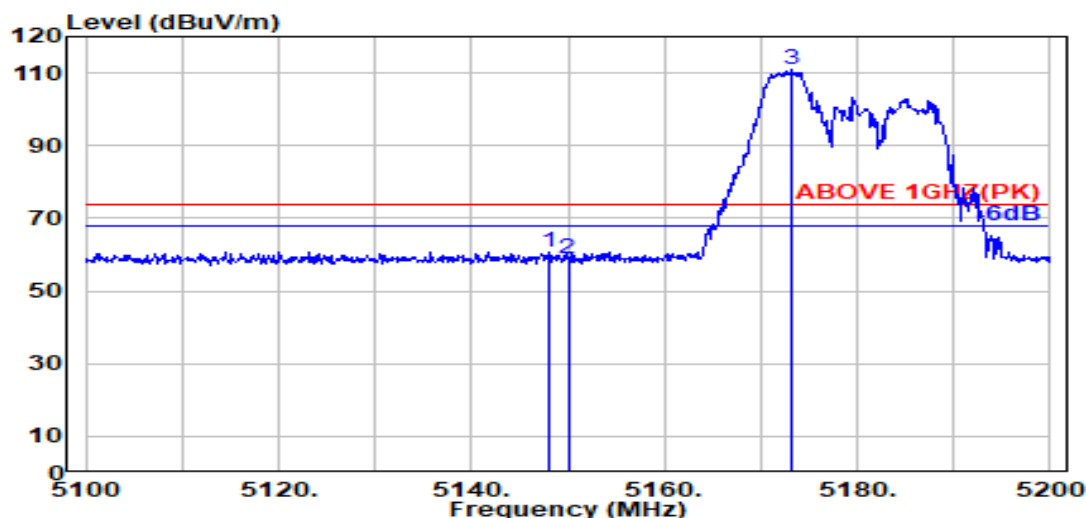

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.70	8.54	34.28	52.76	60.72	74.00	13.28	Peak
5150.000	33.70	8.54	34.28	50.73	58.69	74.00	15.31	Peak
@ 5173.200	33.70	8.56	34.27	102.75	110.74	---	---	Peak

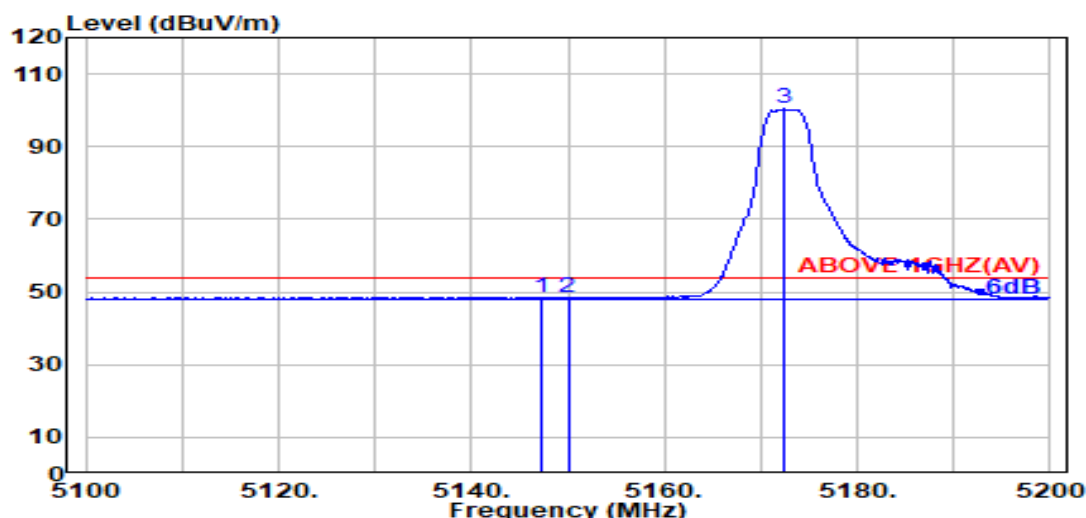

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.70	8.54	34.28	40.62	48.58	54.00	5.42	Average
5150.000	33.70	8.54	34.28	40.36	48.33	54.00	5.67	Average
@ 5172.400	33.70	8.56	34.27	92.34	100.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

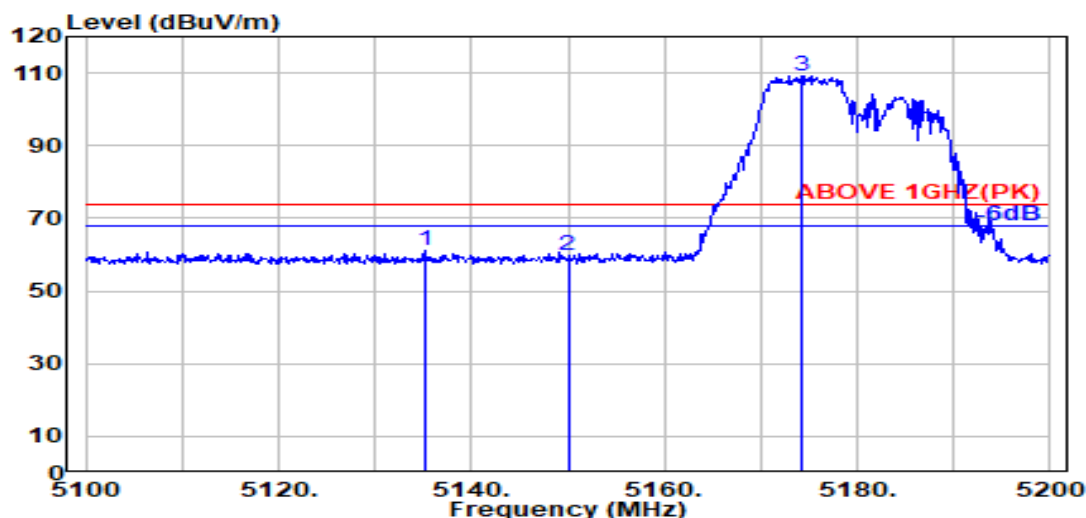

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.100	33.70	8.53	34.29	53.16	61.10	74.00	12.90	Peak
5150.000	33.70	8.54	34.28	51.61	59.58	74.00	14.42	Peak
@ 5174.200	33.70	8.56	34.27	101.26	109.25	---	---	Peak

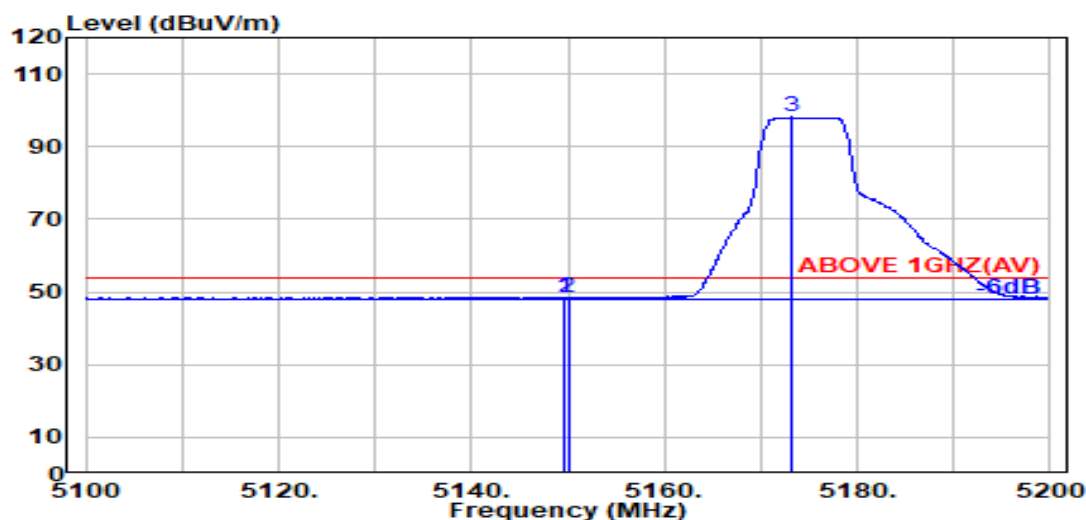

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.54	34.28	40.61	48.57	54.00	5.43	Average
5150.000	33.70	8.54	34.28	40.49	48.46	54.00	5.54	Average
@ 5173.200	33.70	8.56	34.27	90.06	98.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

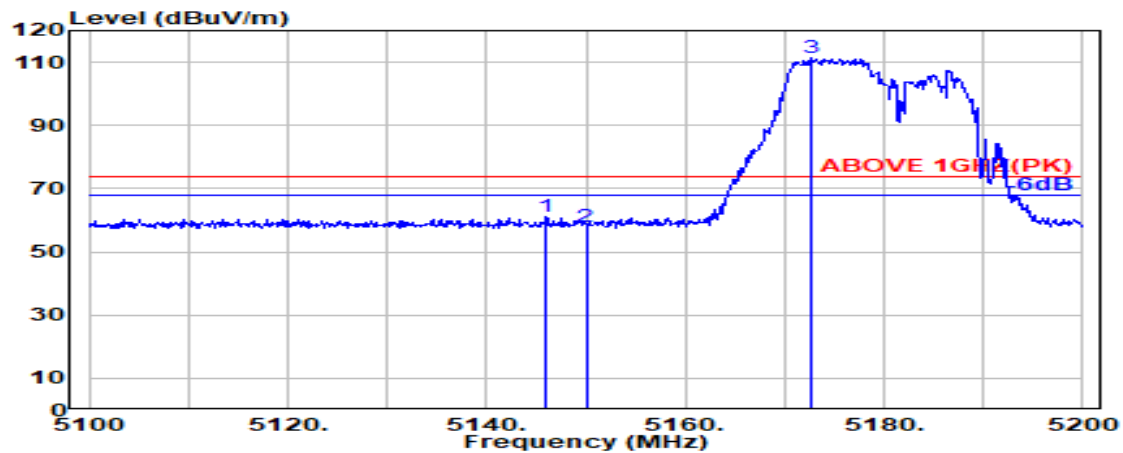

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.70	8.54	34.28	53.01	60.97	74.00	13.03	Peak
5150.000	33.70	8.54	34.28	50.03	58.00	74.00	16.00	Peak
@ 5172.700	33.70	8.56	34.27	103.20	111.19	---	---	Peak

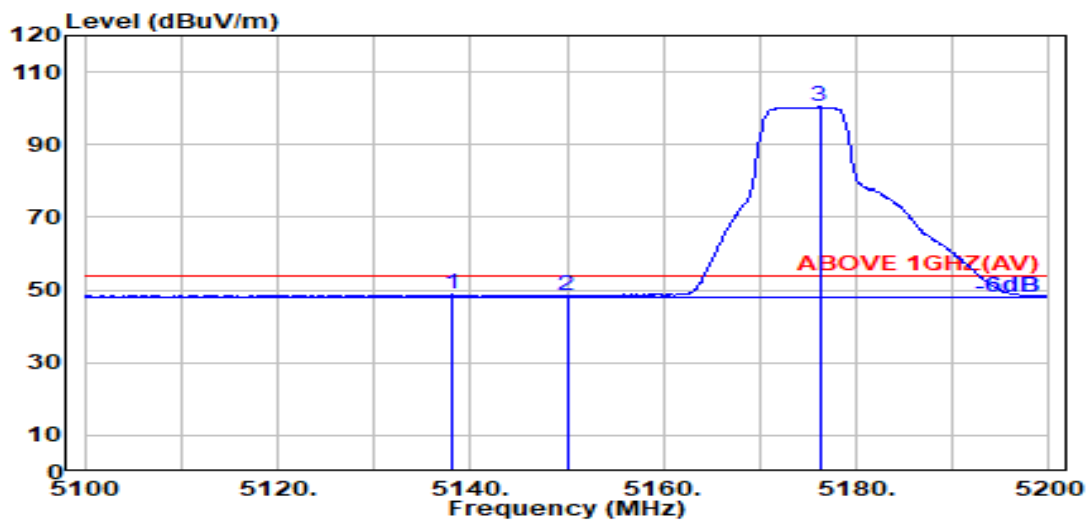

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.100	33.70	8.54	34.28	40.77	48.72	54.00	5.28	Average
5150.000	33.70	8.54	34.28	40.51	48.47	54.00	5.53	Average
@ 5176.200	33.70	8.56	34.27	92.42	100.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

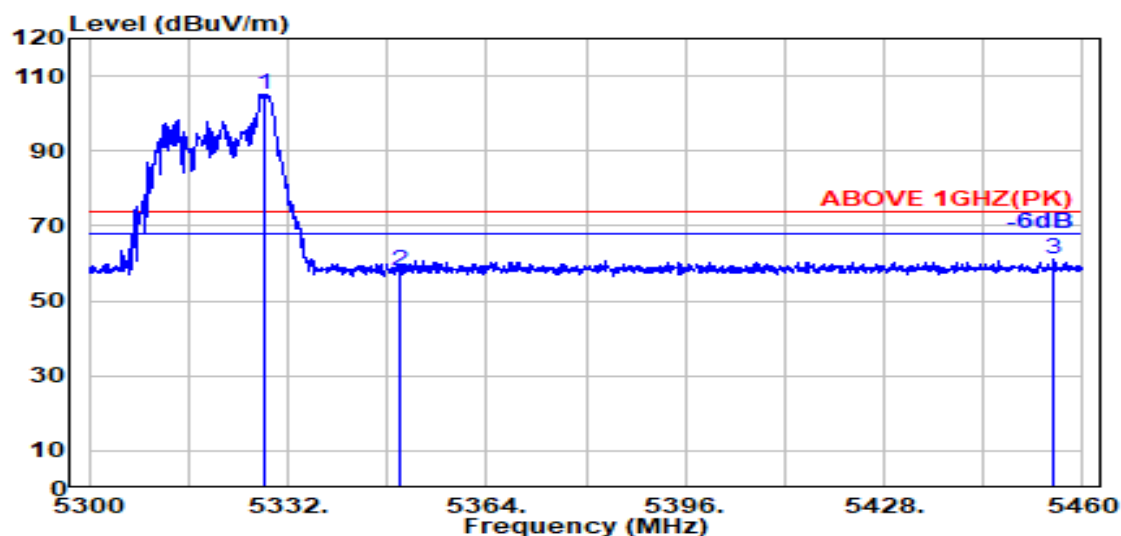

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.100	33.99	8.65	34.22	96.78	105.20	---	---	Peak
5350.000	33.90	8.67	34.22	49.51	57.86	74.00	16.14	Peak
5455.400	34.19	8.73	34.18	52.39	61.12	74.00	12.88	Peak

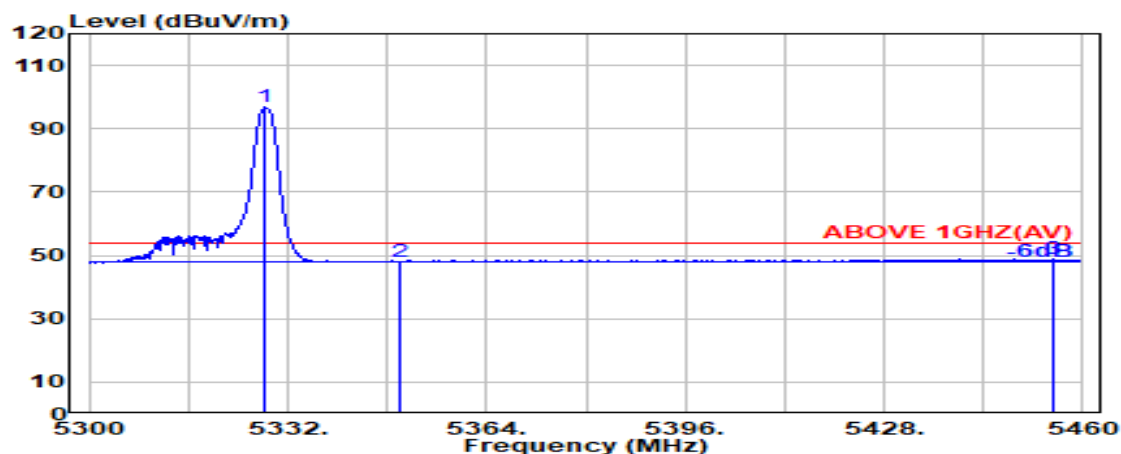


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.400	33.99	8.65	34.22	88.33	96.74	---	---	Average
5350.000	33.90	8.67	34.22	39.73	48.08	54.00	5.92	Average
5455.300	34.19	8.73	34.18	40.02	48.75	54.00	5.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

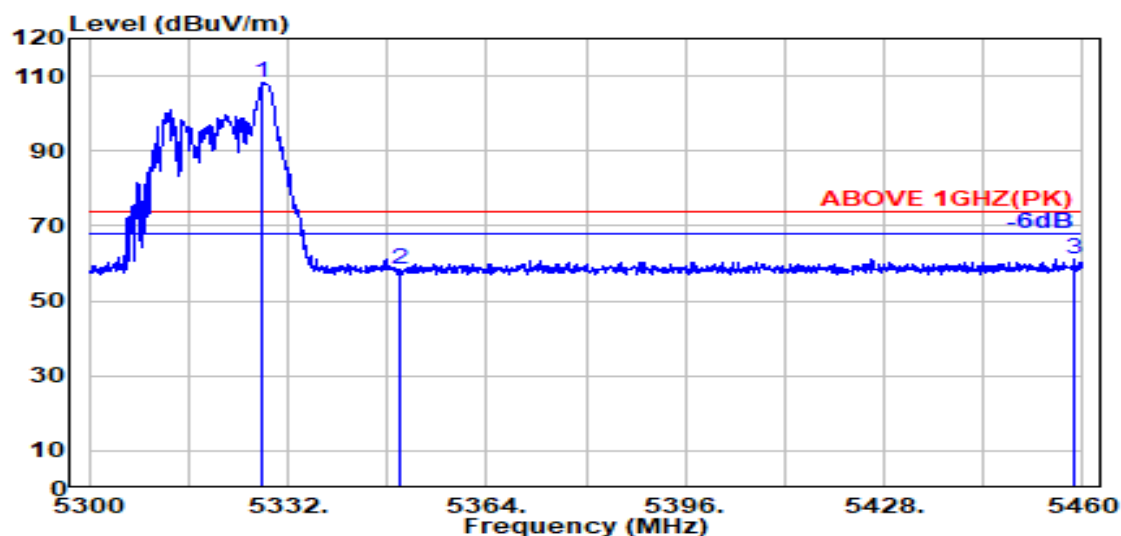

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.99	8.65	34.22	99.84	108.25	---	---	Peak
5350.000	33.90	8.67	34.22	50.07	58.42	74.00	15.58	Peak
5458.700	34.18	8.73	34.18	52.31	61.04	74.00	12.96	Peak

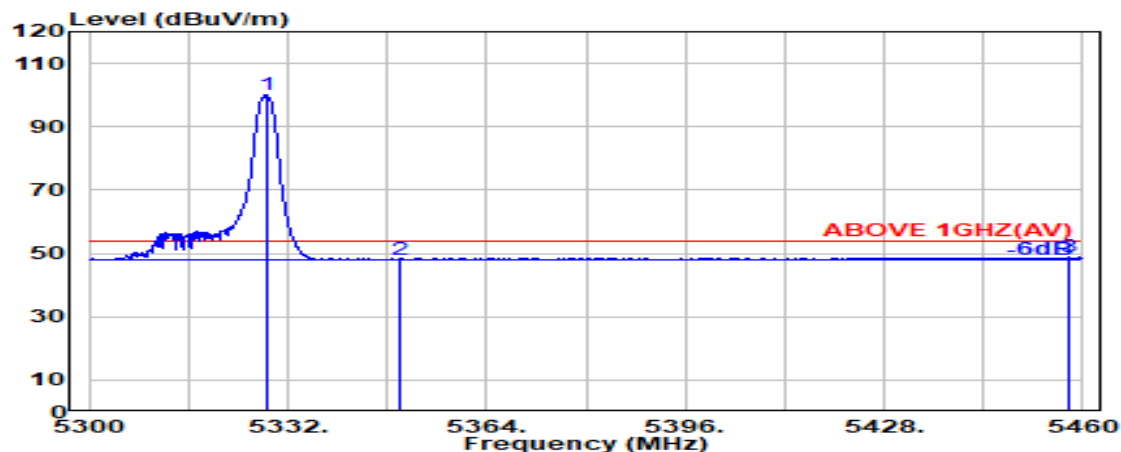

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.99	8.65	34.22	91.56	99.97	---	---	Average
5350.000	33.90	8.67	34.22	39.74	48.09	54.00	5.91	Average
5457.700	34.18	8.73	34.18	40.06	48.79	54.00	5.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

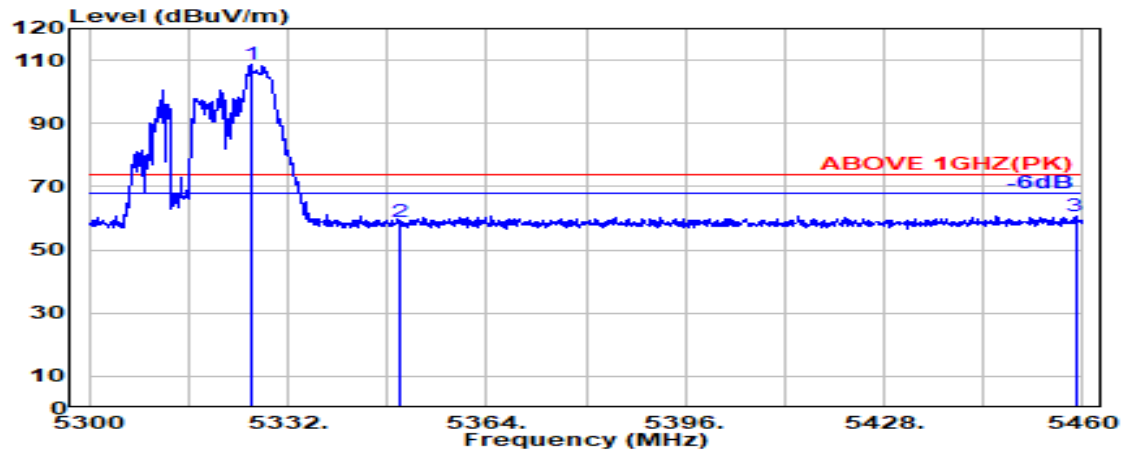

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.000	34.00	8.65	34.22	100.09	108.52	---	---	Peak
5350.000	33.90	8.67	34.22	50.62	58.97	74.00	15.03	Peak
5458.800	34.18	8.73	34.18	51.99	60.71	74.00	13.29	Peak

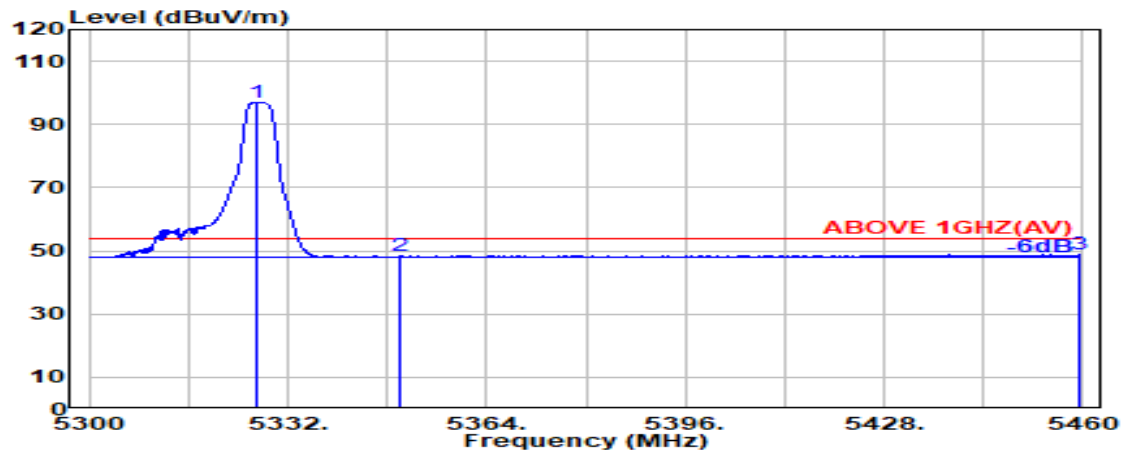

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.000	33.99	8.65	34.22	88.69	97.11	---	---	Average
5350.000	33.90	8.67	34.22	39.88	48.23	54.00	5.77	Average
5459.600	34.18	8.73	34.18	40.07	48.80	54.00	5.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

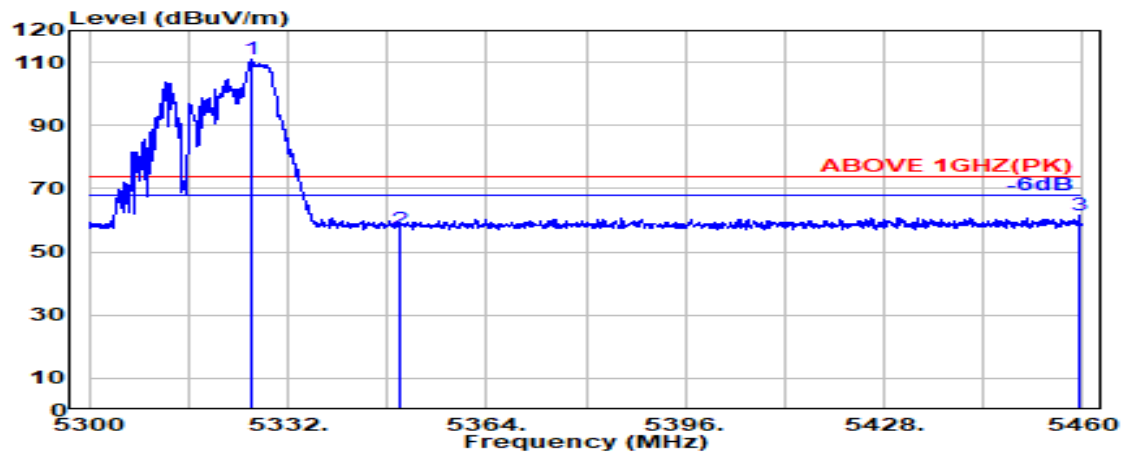

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.000	34.00	8.65	34.22	102.56	110.98	---	---	Peak
5350.000	33.90	8.67	34.22	48.78	57.13	74.00	16.87	Peak
5459.500	34.18	8.73	34.18	52.66	61.39	74.00	12.61	Peak

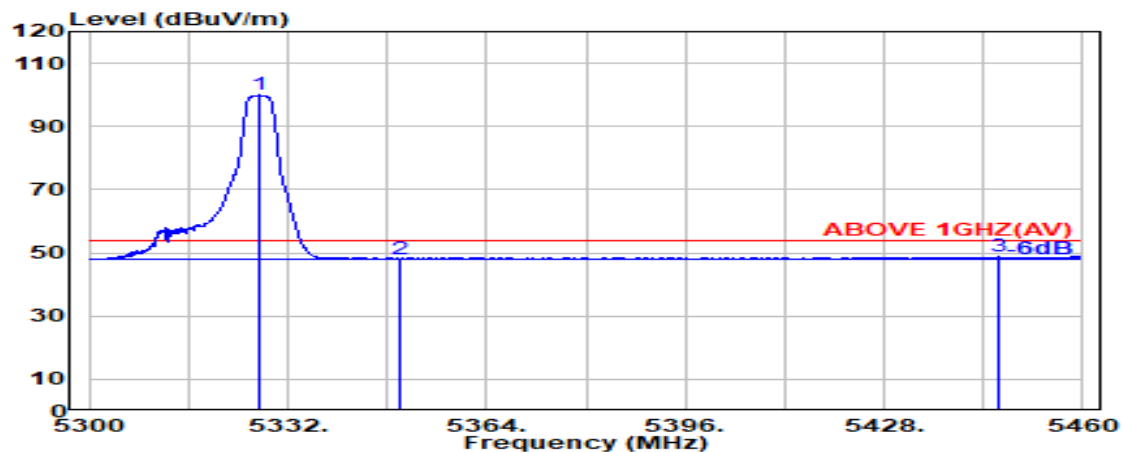

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	33.99	8.65	34.22	91.53	99.94	---	---	Average
5350.000	33.90	8.67	34.22	39.72	48.07	54.00	5.93	Average
5446.500	34.19	8.72	34.19	40.06	48.79	54.00	5.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

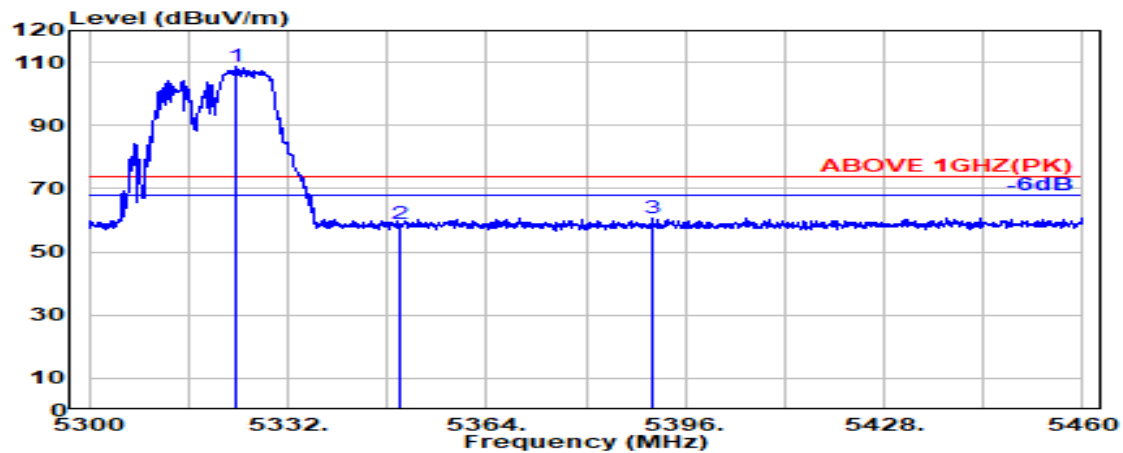

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	34.01	8.65	34.22	100.09	108.52	---	---	Peak
5350.000	33.90	8.67	34.22	50.66	59.01	74.00	14.99	Peak
5390.700	34.06	8.69	34.20	52.27	60.82	74.00	13.18	Peak

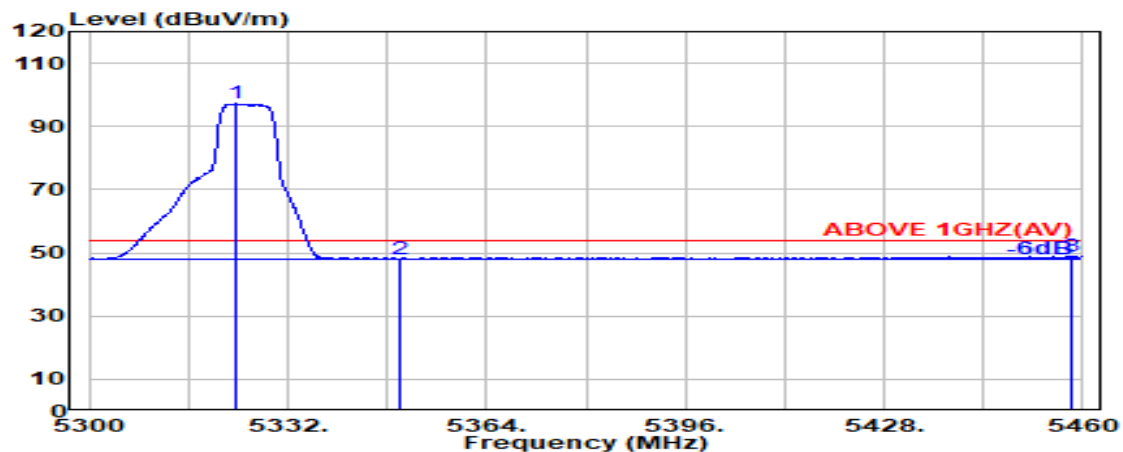

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	34.00	8.65	34.22	88.72	97.15	---	---	Average
5350.000	33.90	8.67	34.22	39.83	48.18	54.00	5.82	Average
5458.100	34.18	8.73	34.18	40.12	48.85	54.00	5.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

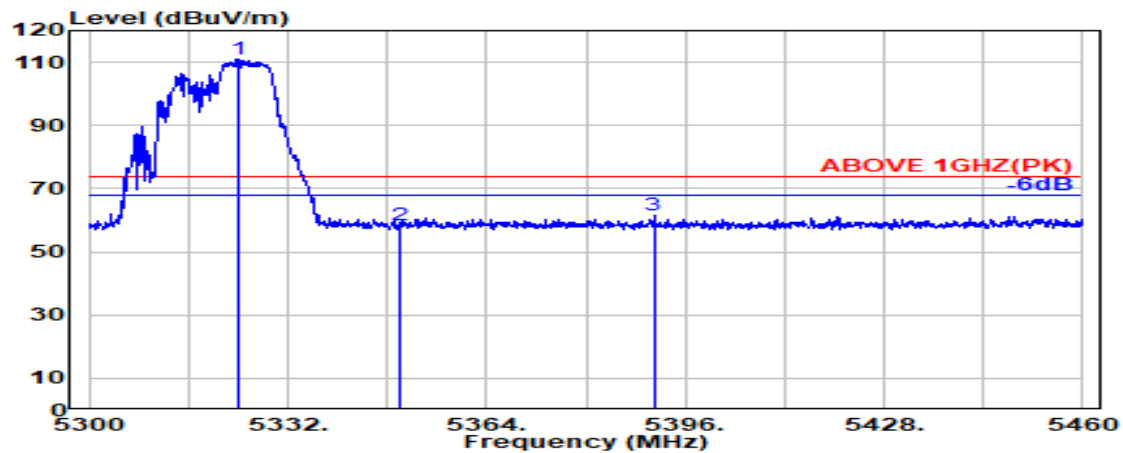

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.00	8.65	34.22	102.67	111.10	---	---	Peak
5350.000	33.90	8.67	34.22	50.04	58.39	74.00	15.61	Peak
5390.900	34.06	8.69	34.20	52.86	61.41	74.00	12.59	Peak

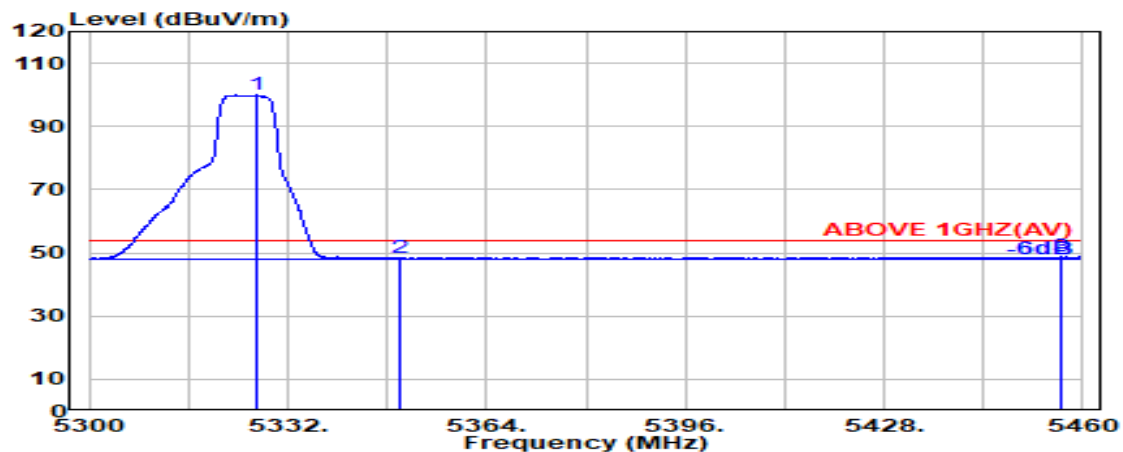

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.99	8.65	34.22	91.49	99.90	---	---	Average
5350.000	33.90	8.67	34.22	39.91	48.26	54.00	5.74	Average
5456.500	34.19	8.73	34.18	40.04	48.77	54.00	5.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

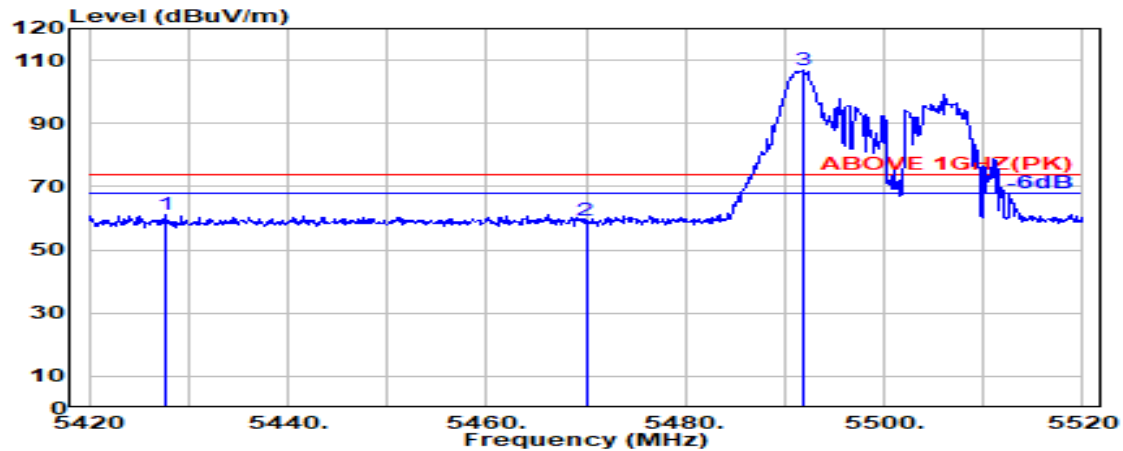

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.600	34.16	8.71	34.19	52.60	61.27	74.00	12.73	Peak
5470.000	34.16	8.74	34.18	50.43	59.14	74.00	14.86	Peak
@ 5491.800	34.12	8.75	34.17	98.23	106.92	---	---	Peak

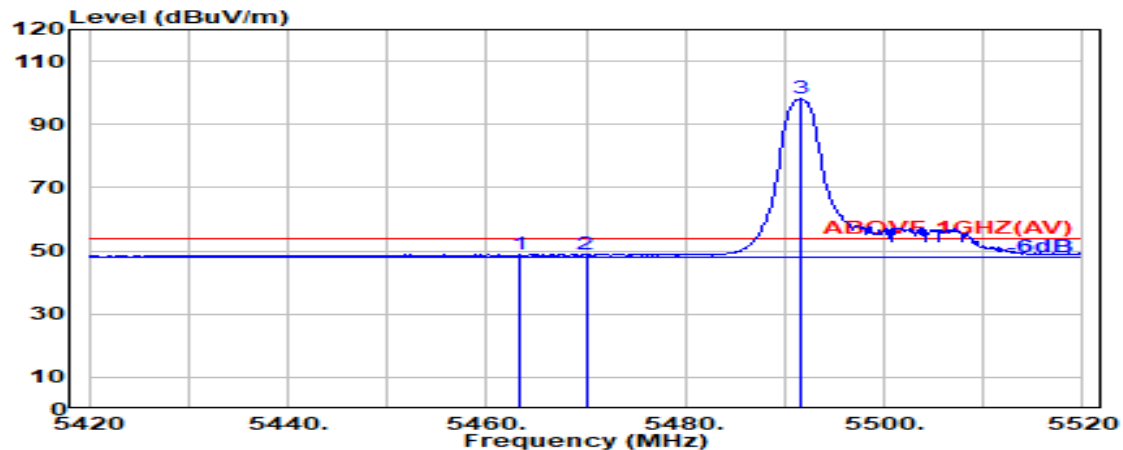

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.17	8.73	34.18	40.11	48.83	54.00	5.17	Average
5470.000	34.16	8.74	34.18	40.17	48.89	54.00	5.11	Average
@ 5491.700	34.12	8.75	34.17	89.42	98.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

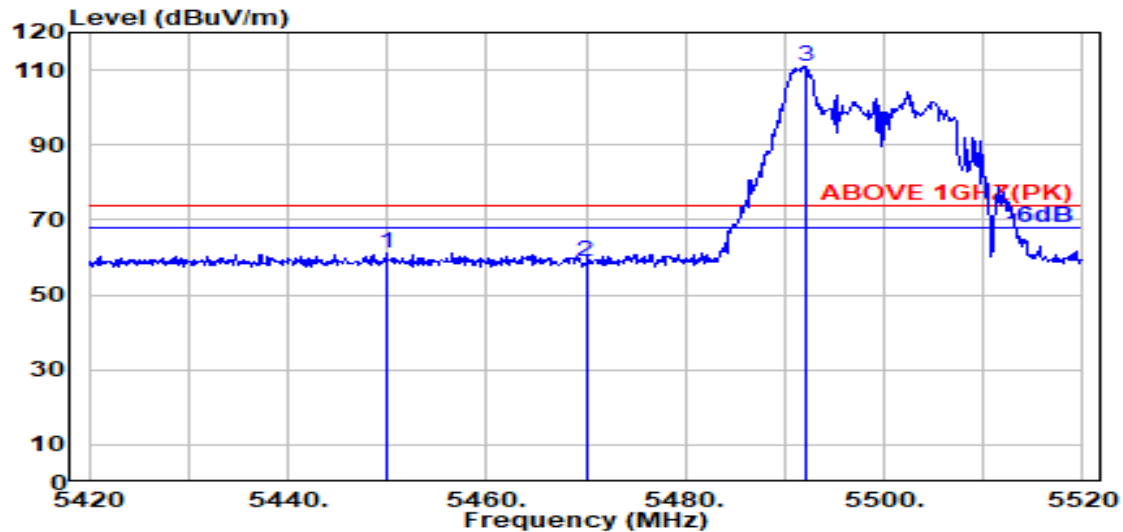

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.900	34.20	8.72	34.19	52.51	61.24	74.00	12.76	Peak
5470.000	34.16	8.74	34.18	50.24	58.96	74.00	15.04	Peak
@ 5492.100	34.12	8.75	34.17	102.31	111.00	---	---	Peak

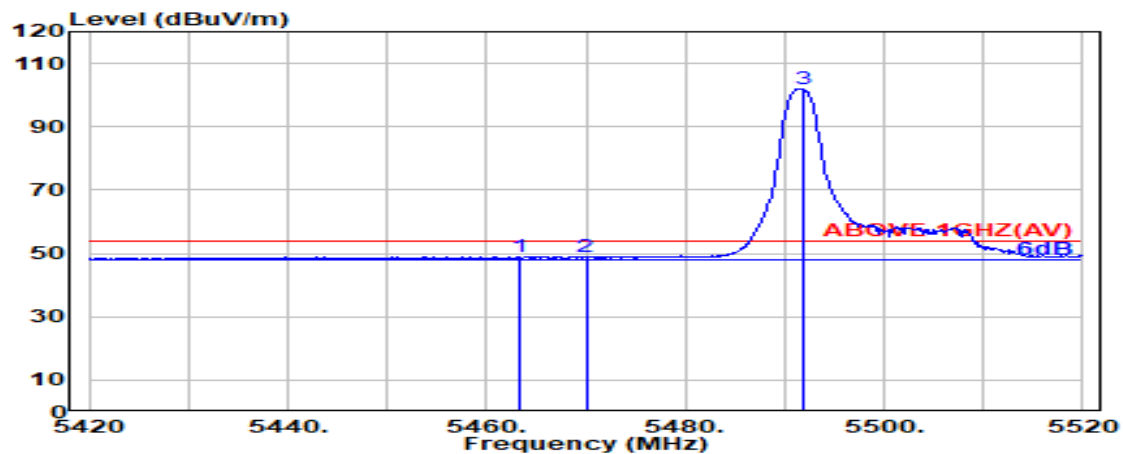

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.17	8.73	34.18	40.21	48.93	54.00	5.07	Average
5470.000	34.16	8.74	34.18	40.00	48.72	54.00	5.28	Average
@ 5491.800	34.12	8.75	34.17	93.36	102.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

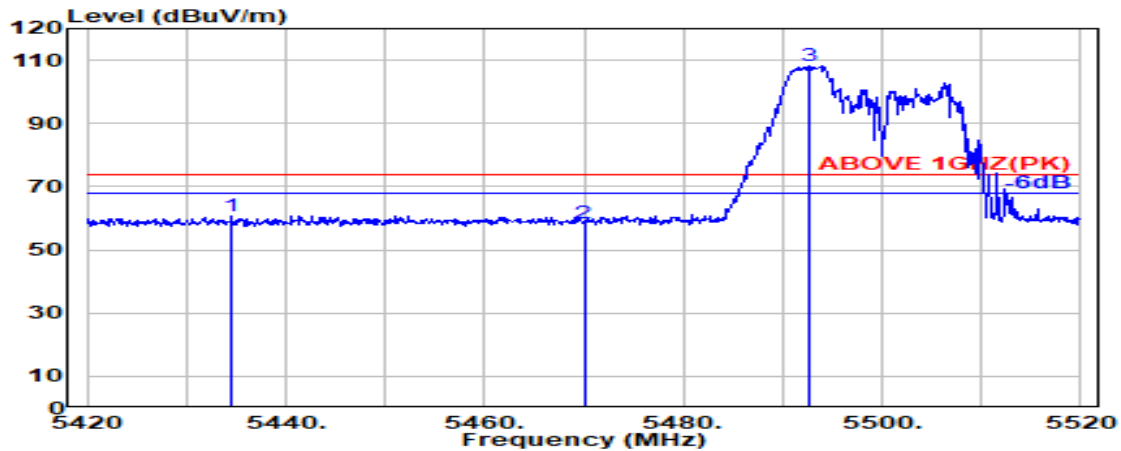

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.600	34.17	8.72	34.19	52.12	60.82	74.00	13.18	Peak
5470.000	34.16	8.74	34.18	49.72	58.44	74.00	15.56	Peak
@ 5492.600	34.11	8.75	34.17	99.63	108.32	---	---	Peak

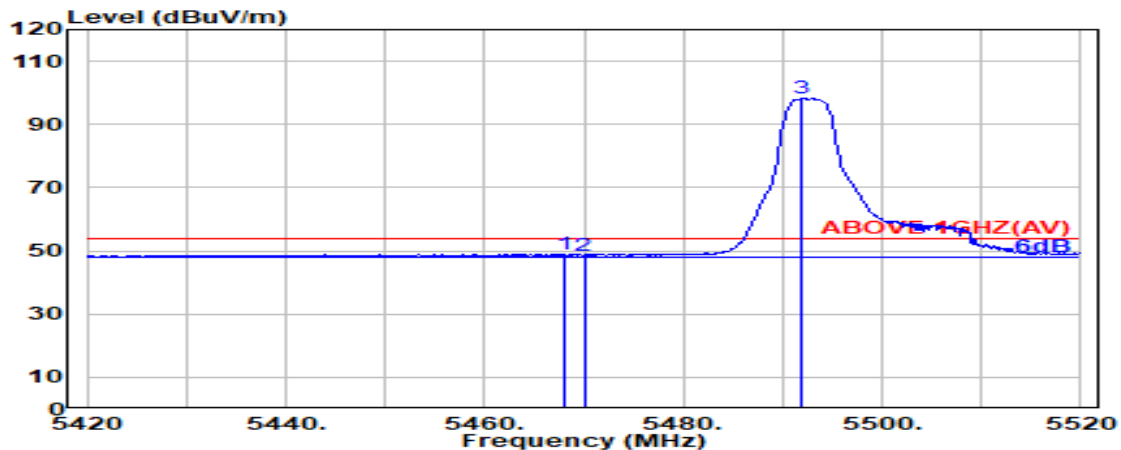

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	40.16	48.88	54.00	5.12	Average
5470.000	34.16	8.74	34.18	39.86	48.58	54.00	5.42	Average
@ 5492.000	34.12	8.75	34.17	89.47	98.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

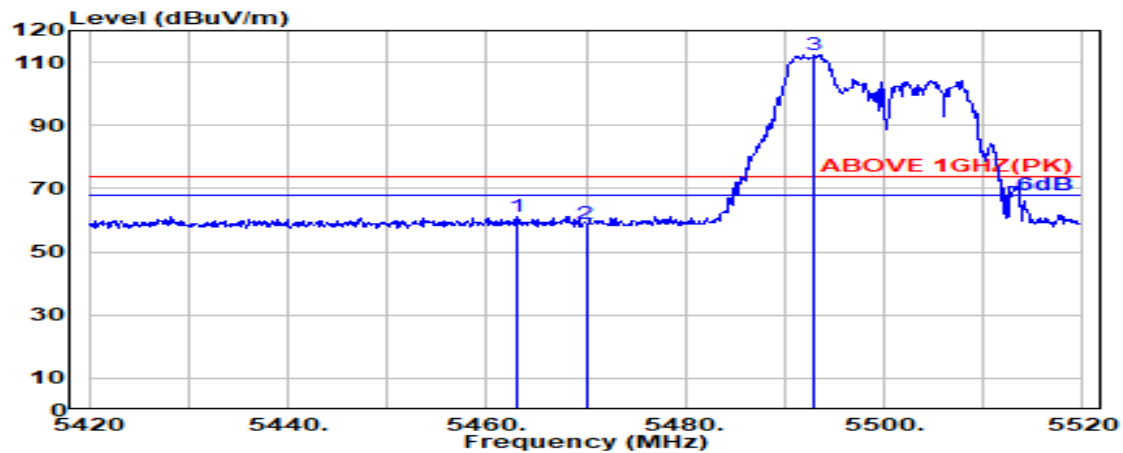

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.000	34.17	8.73	34.18	52.35	61.08	74.00	12.92	Peak
5470.000	34.16	8.74	34.18	50.27	58.99	74.00	15.01	Peak
@ 5493.000	34.11	8.75	34.17	103.70	112.39	---	---	Peak

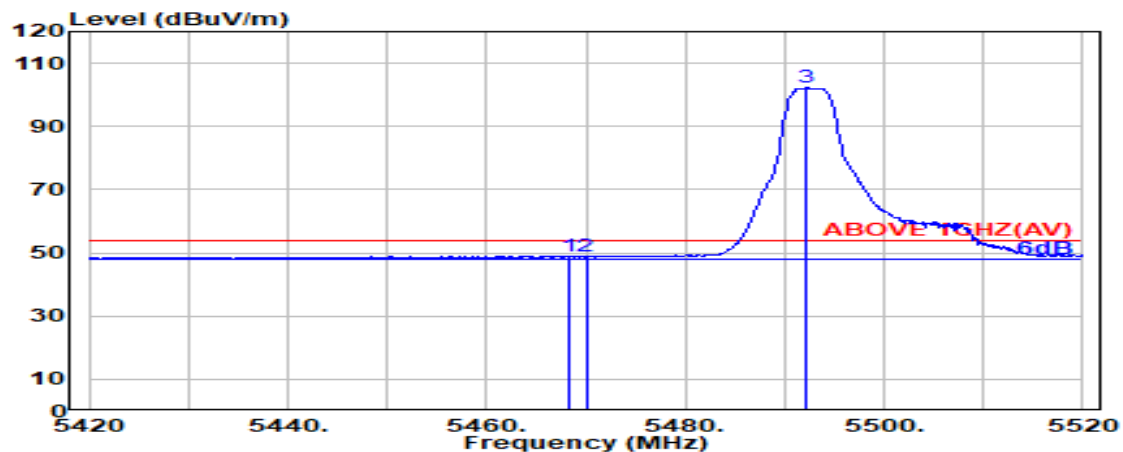

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.16	8.73	34.18	40.27	48.98	54.00	5.02	Average
5470.000	34.16	8.74	34.18	40.17	48.88	54.00	5.12	Average
@ 5492.100	34.12	8.75	34.17	93.53	102.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

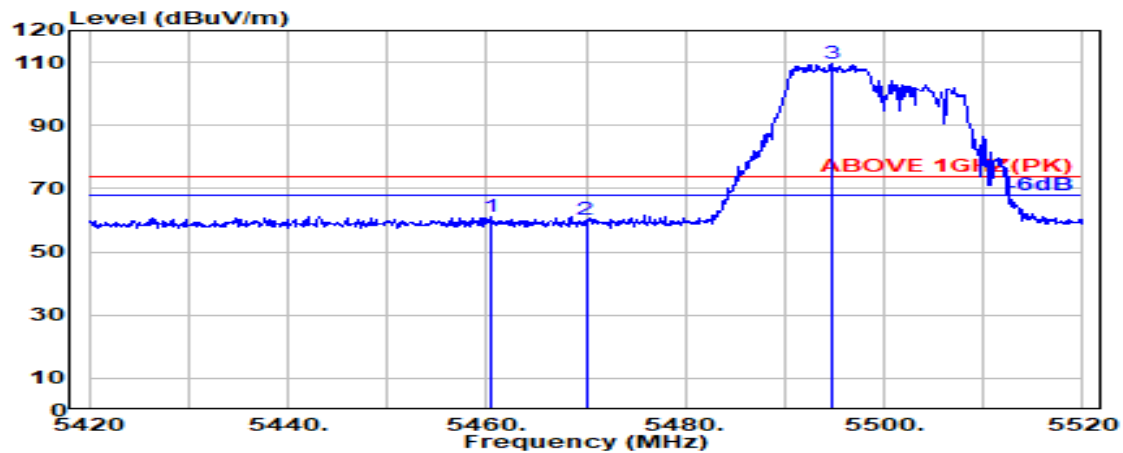

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	34.18	8.73	34.18	52.40	61.13	74.00	12.87	Peak
5470.000	34.16	8.74	34.18	51.37	60.08	74.00	13.92	Peak
@ 5494.800	34.11	8.75	34.17	100.74	109.42	---	---	Peak

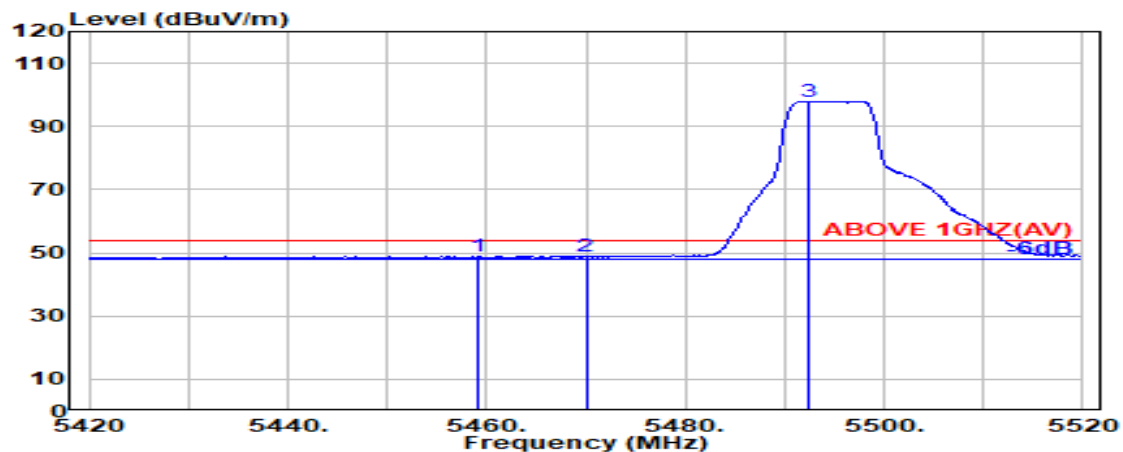

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	34.18	8.73	34.18	40.18	48.91	54.00	5.09	Average
5470.000	34.16	8.74	34.18	40.02	48.73	54.00	5.27	Average
@ 5492.400	34.12	8.75	34.17	89.26	97.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

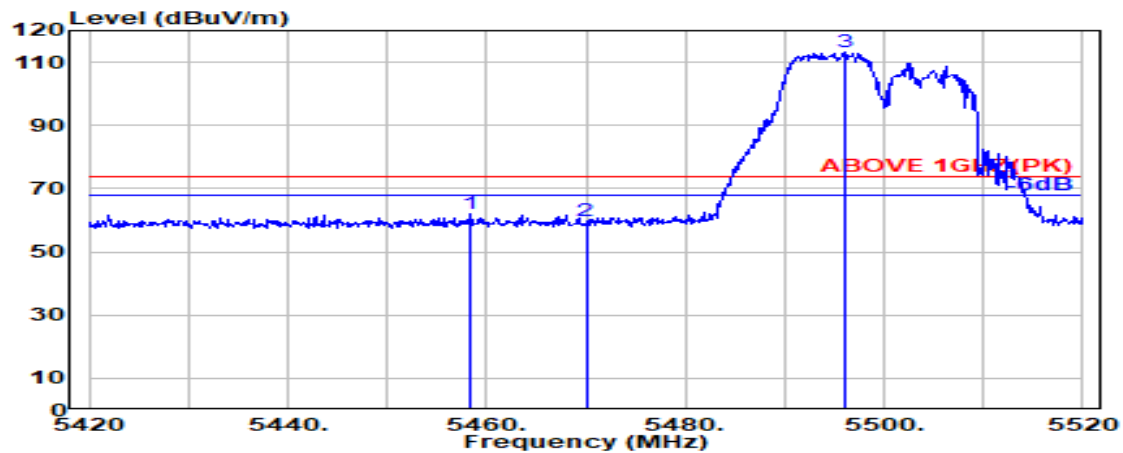

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.18	8.73	34.18	53.12	61.85	74.00	12.15	Peak
5470.000	34.16	8.74	34.18	51.11	59.83	74.00	14.17	Peak
@ 5496.000	34.11	8.75	34.17	104.42	113.11	---	---	Peak

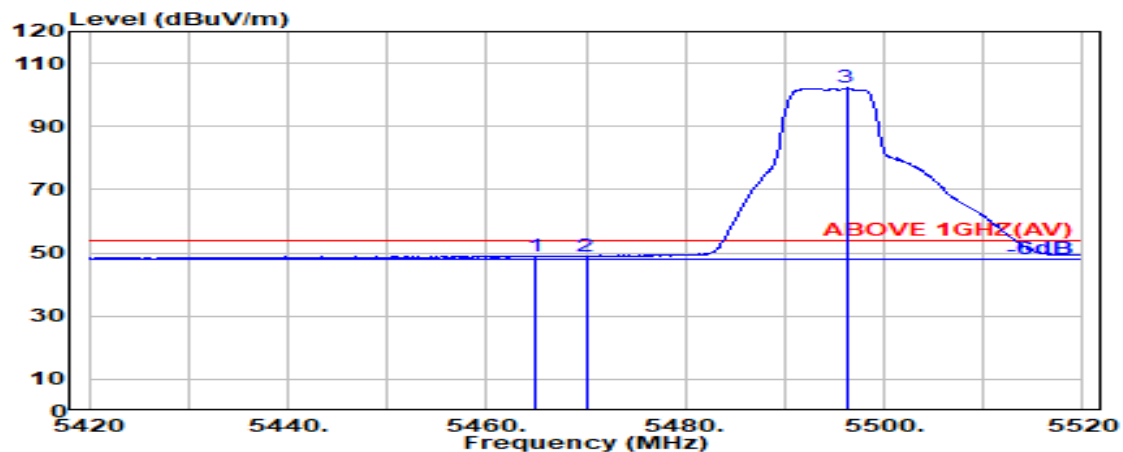

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.17	8.73	34.18	40.31	49.03	54.00	4.97	Average
5470.000	34.16	8.74	34.18	40.08	48.80	54.00	5.20	Average
@ 5496.200	34.11	8.75	34.17	93.43	102.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

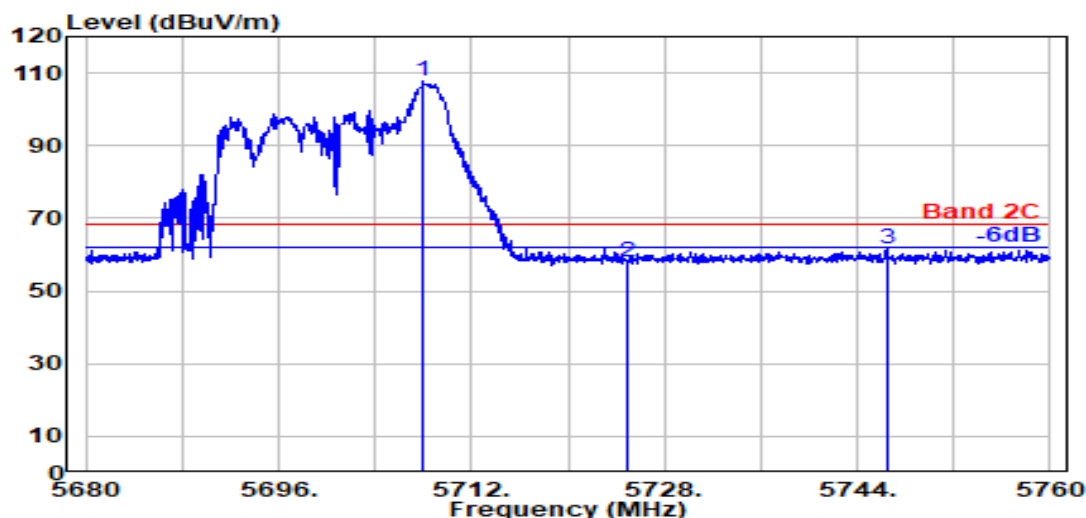

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	33.80	8.87	34.27	99.25	107.65	---	---	Peak
5725.000	33.80	8.88	34.28	49.61	58.01	68.20	10.19	Peak
5746.450	33.80	8.89	34.29	53.01	61.42	68.20	6.78	Peak

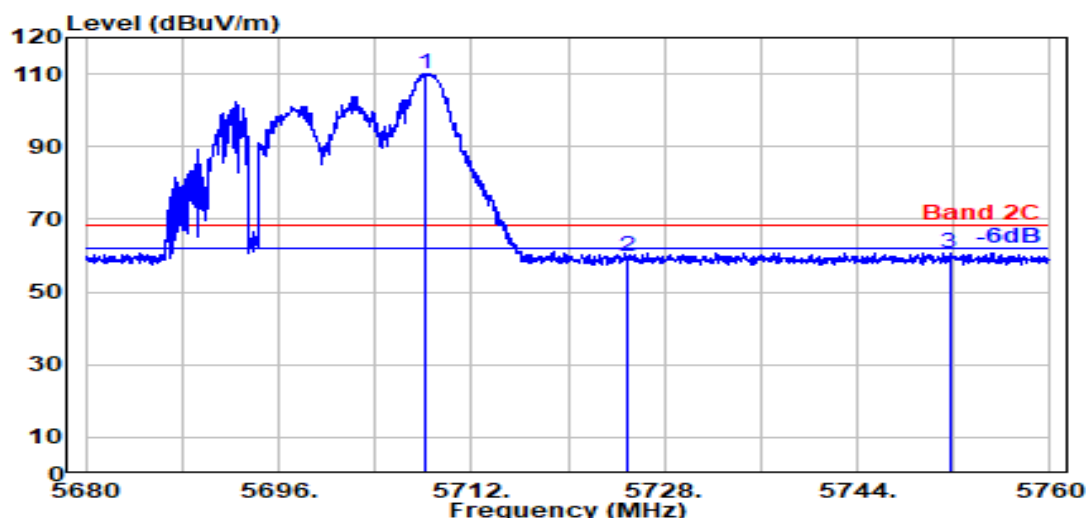


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.150	33.80	8.87	34.27	101.79	110.19	---	---	Peak
5725.000	33.80	8.88	34.28	51.21	59.61	68.20	8.59	Peak
5751.650	33.81	8.90	34.29	52.43	60.84	68.20	7.36	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

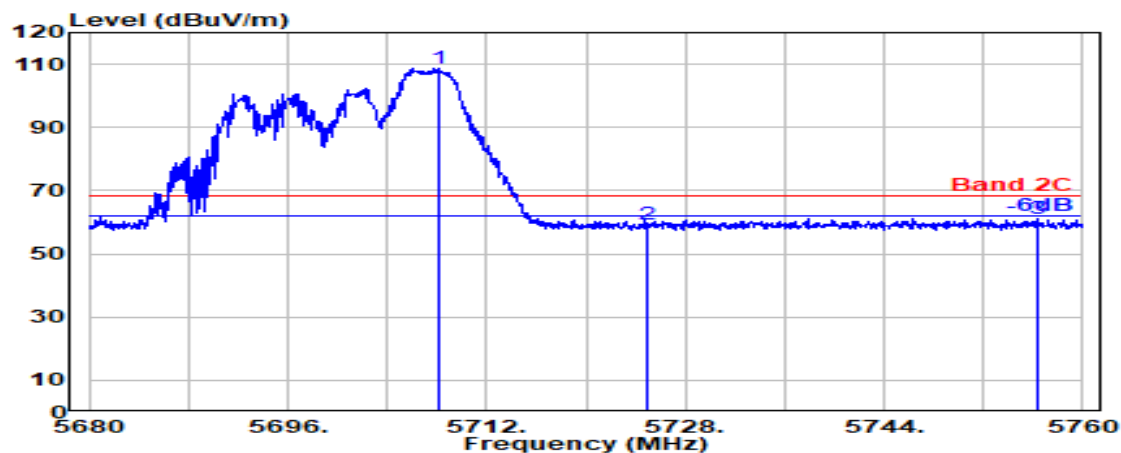

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.80	8.87	34.27	100.33	108.73	---	---	Peak
	5725.000	33.80	8.88	34.28	51.13	59.54	68.20	8.66	Peak
	5756.450	33.83	8.90	34.29	52.91	61.35	68.20	6.85	Peak

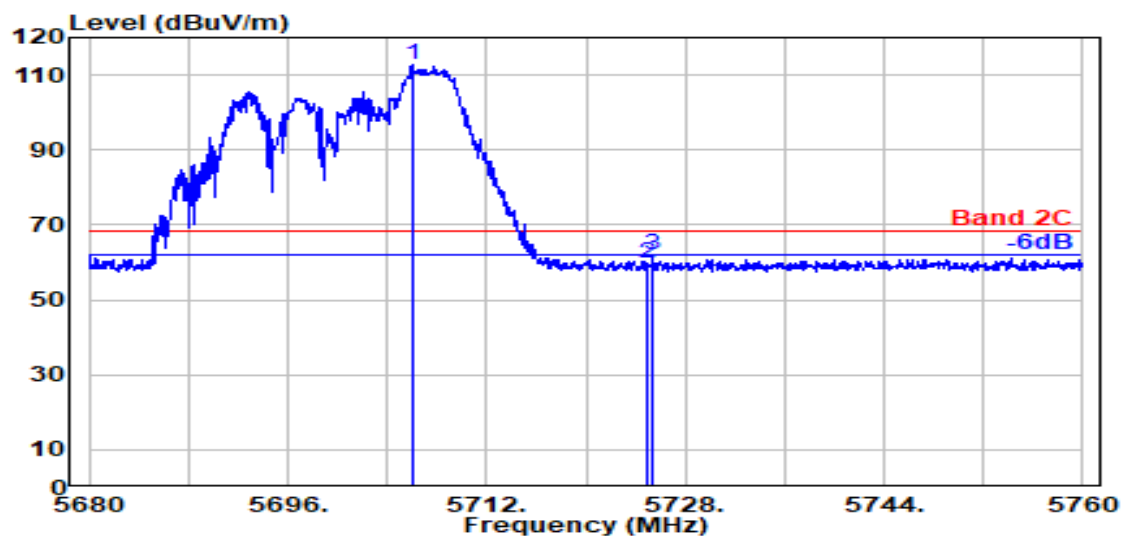

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.000	33.80	8.87	34.27	104.18	112.58	---	---	Peak
	5725.000	33.80	8.88	34.28	51.29	59.69	68.20	8.51	Peak
	5725.300	33.80	8.88	34.28	53.77	62.17	68.20	6.03	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

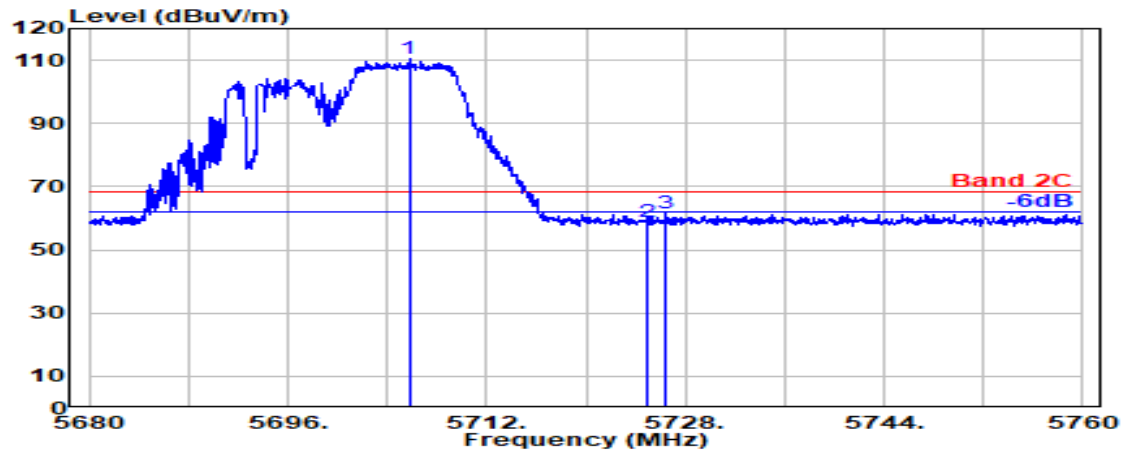

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.750	33.80	8.87	34.27	102.09	110.50	---	---	Peak
5725.000	33.80	8.88	34.28	50.48	58.89	68.20	9.31	Peak
5726.450	33.80	8.88	34.28	53.01	61.42	68.20	6.78	Peak

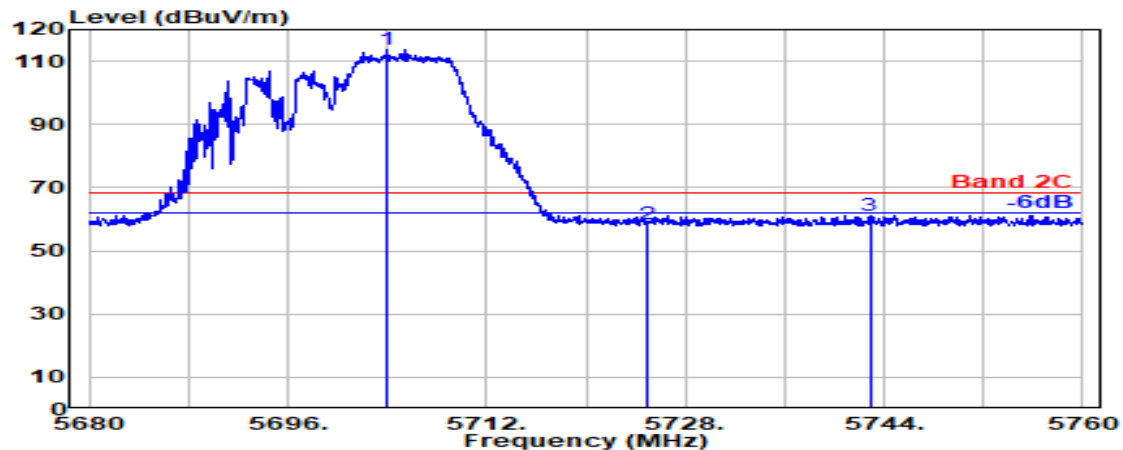

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.000	33.80	8.87	34.27	105.14	113.54	---	---	Peak
5725.000	33.80	8.88	34.28	49.83	58.24	68.20	9.96	Peak
5742.850	33.80	8.89	34.28	52.84	61.25	68.20	6.95	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

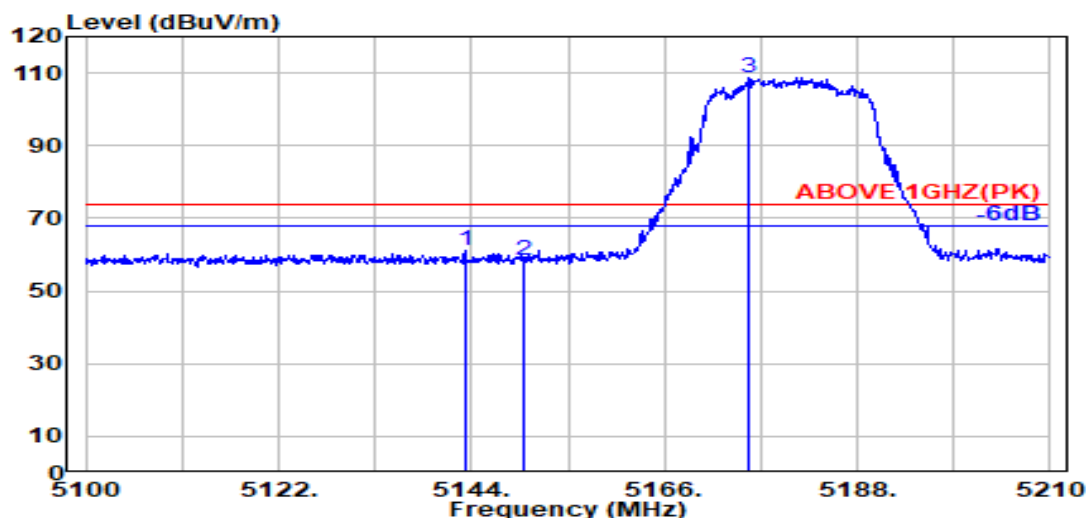

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.200	33.70	8.54	34.28	53.09	61.05	74.00	12.95	Peak
5150.000	33.70	8.54	34.28	50.53	58.50	74.00	15.50	Peak
@ 5175.700	33.70	8.56	34.27	100.78	108.76	---	---	Peak

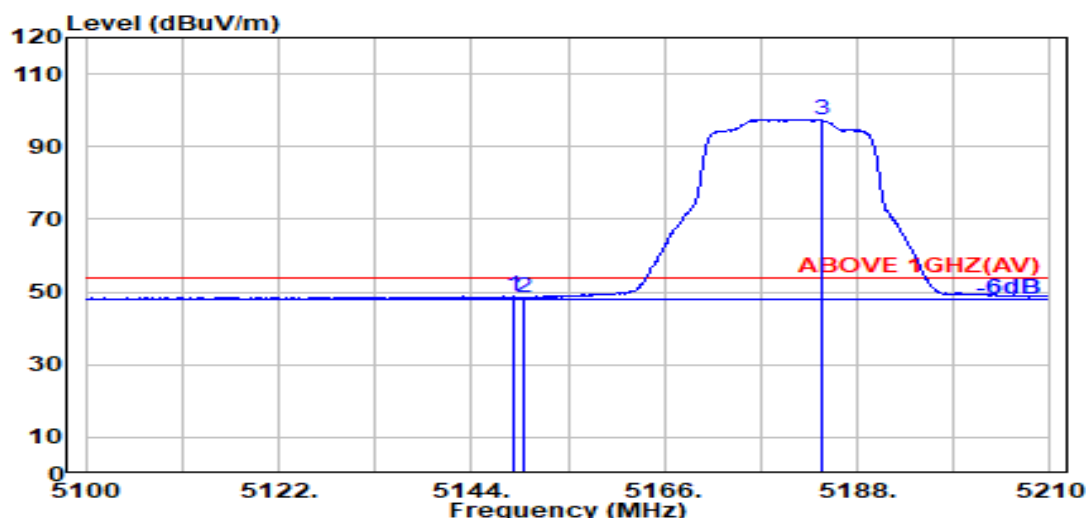

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.70	8.54	34.28	40.77	48.74	54.00	5.26	Average
5150.000	33.70	8.54	34.28	40.64	48.60	54.00	5.40	Average
@ 5183.900	33.70	8.56	34.27	89.50	97.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

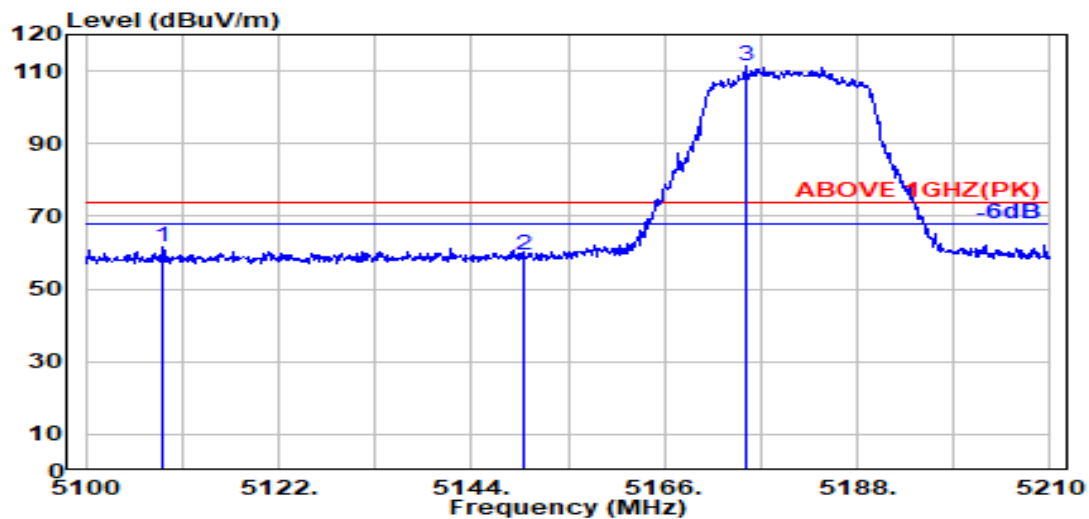

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.800	33.70	8.52	34.29	53.44	61.36	74.00	12.64	Peak
5150.000	33.70	8.54	34.28	51.16	59.12	74.00	14.88	Peak
@ 5175.400	33.70	8.56	34.27	103.25	111.24	---	---	Peak

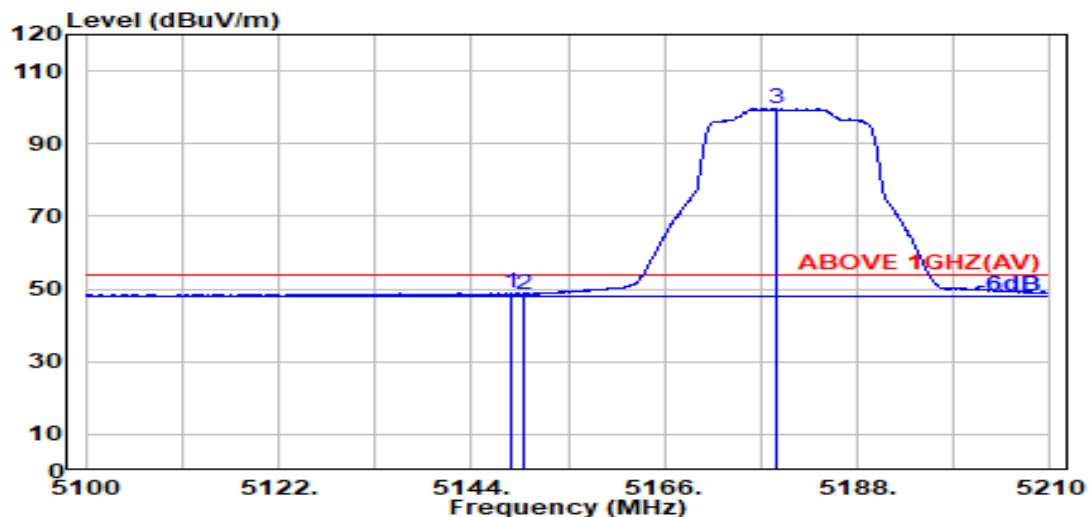

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.70	8.54	34.28	40.83	48.79	54.00	5.21	Average
5150.000	33.70	8.54	34.28	40.68	48.64	54.00	5.36	Average
@ 5178.800	33.70	8.56	34.27	91.57	99.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

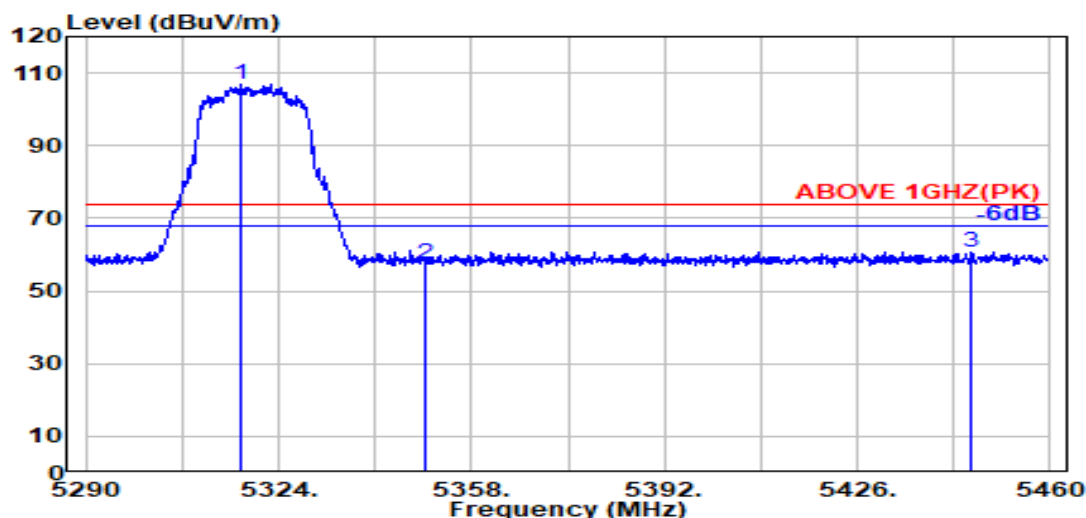

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.300	34.03	8.65	34.23	98.52	106.97	---	---	Peak
5350.000	33.90	8.67	34.22	49.22	57.57	74.00	16.43	Peak
5446.200	34.19	8.72	34.19	52.18	60.91	74.00	13.09	Peak

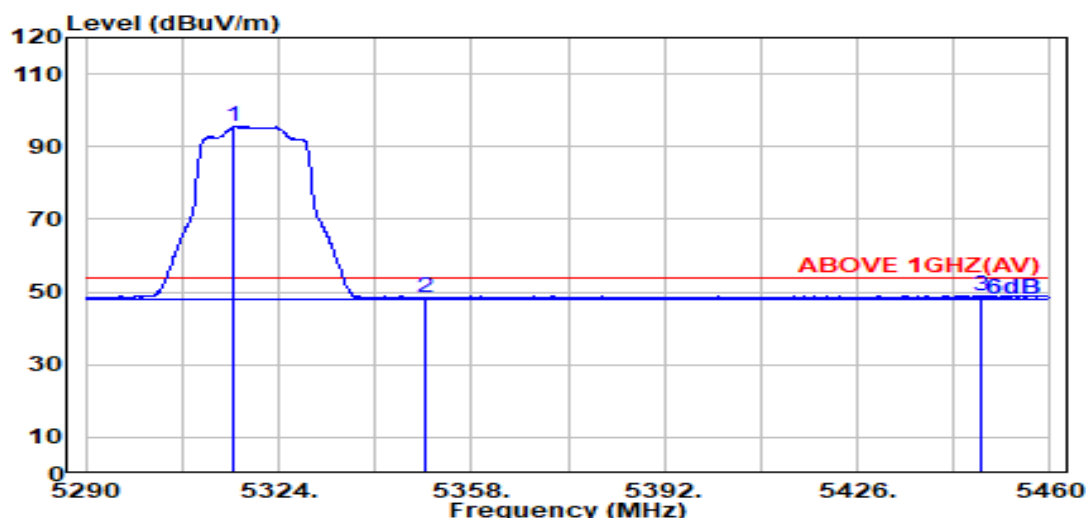

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	34.04	8.65	34.23	87.21	95.66	---	---	Average
5350.000	33.90	8.67	34.22	40.03	48.38	54.00	5.62	Average
5447.700	34.20	8.72	34.19	40.26	48.99	54.00	5.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

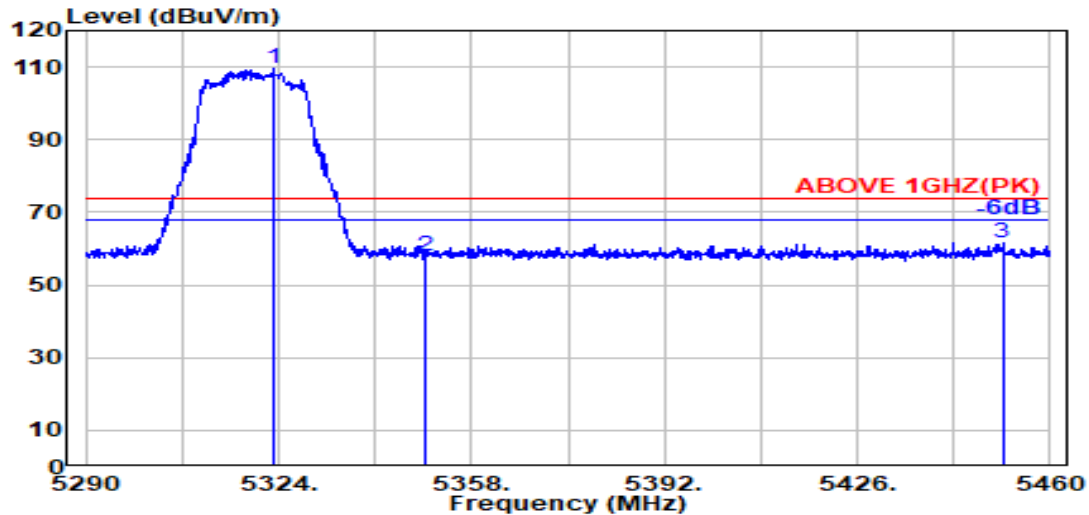

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.000	34.01	8.65	34.22	101.05	109.48	---	---	Peak
5350.000	33.90	8.67	34.22	49.76	58.11	74.00	15.89	Peak
5451.600	34.20	8.73	34.18	53.04	61.78	74.00	12.22	Peak

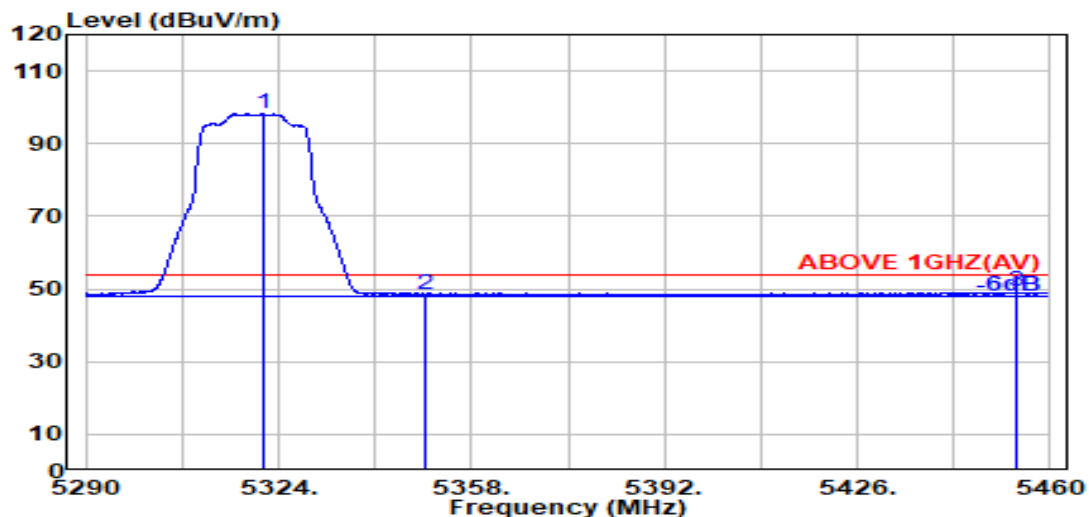

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.200	34.01	8.65	34.23	89.73	98.17	---	---	Average
5350.000	33.90	8.67	34.22	40.24	48.59	54.00	5.41	Average
5454.000	34.19	8.73	34.18	40.43	49.17	54.00	4.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

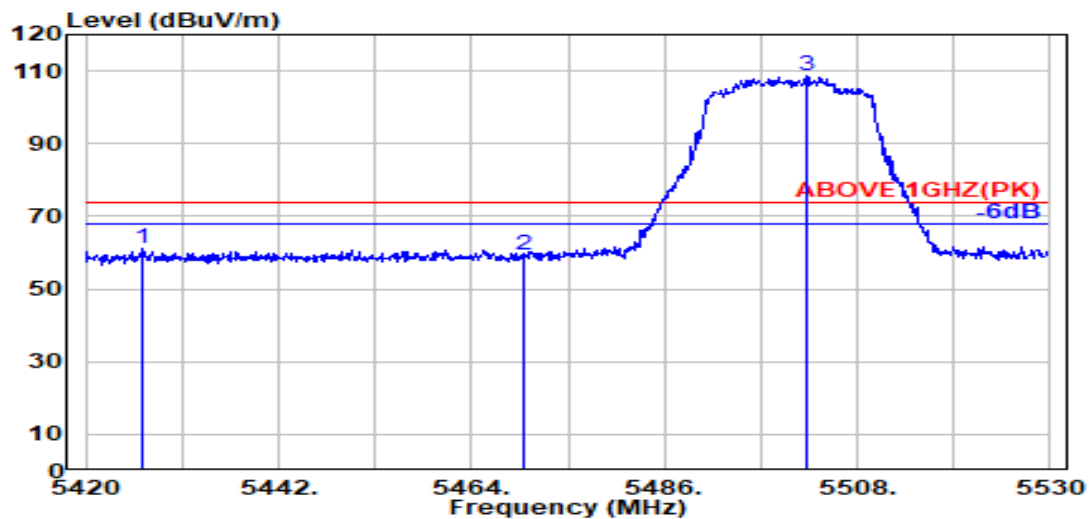

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.400	34.15	8.71	34.19	52.59	61.26	74.00	12.74	Peak
5470.000	34.16	8.74	34.18	50.52	59.24	74.00	14.76	Peak
@ 5502.100	34.10	8.75	34.17	99.85	108.53	---	---	Peak

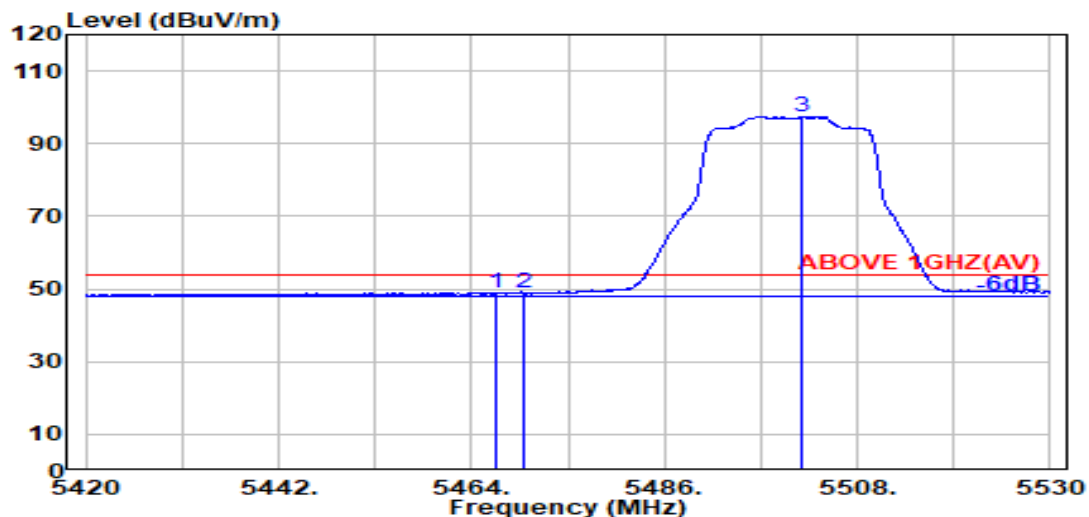

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.17	8.73	34.18	40.27	48.99	54.00	5.01	Average
5470.000	34.16	8.74	34.18	40.06	48.78	54.00	5.22	Average
@ 5501.700	34.10	8.75	34.17	88.83	97.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

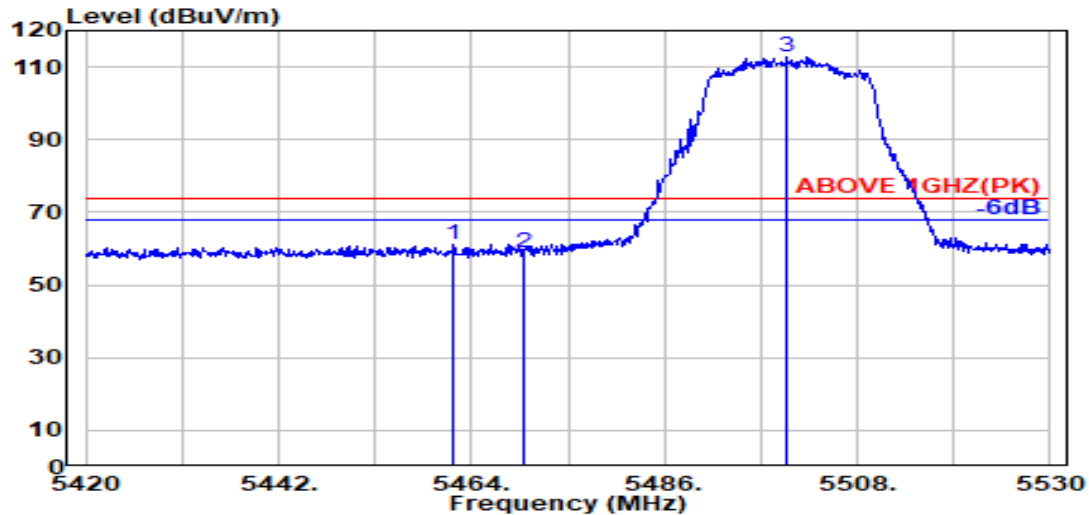

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.18	8.73	34.18	52.50	61.22	74.00	12.78	Peak
5470.000	34.16	8.74	34.18	50.04	58.75	74.00	15.25	Peak
@ 5499.900	34.10	8.75	34.17	104.15	112.84	---	---	Peak

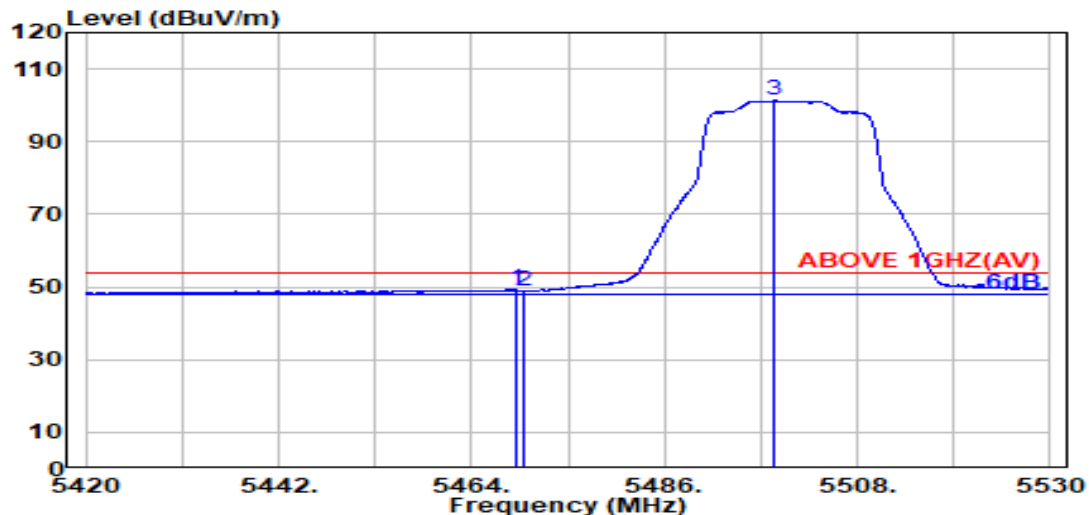

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	40.62	49.33	54.00	4.67	Average
5470.000	34.16	8.74	34.18	40.29	49.00	54.00	5.00	Average
@ 5498.600	34.10	8.75	34.17	92.59	101.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

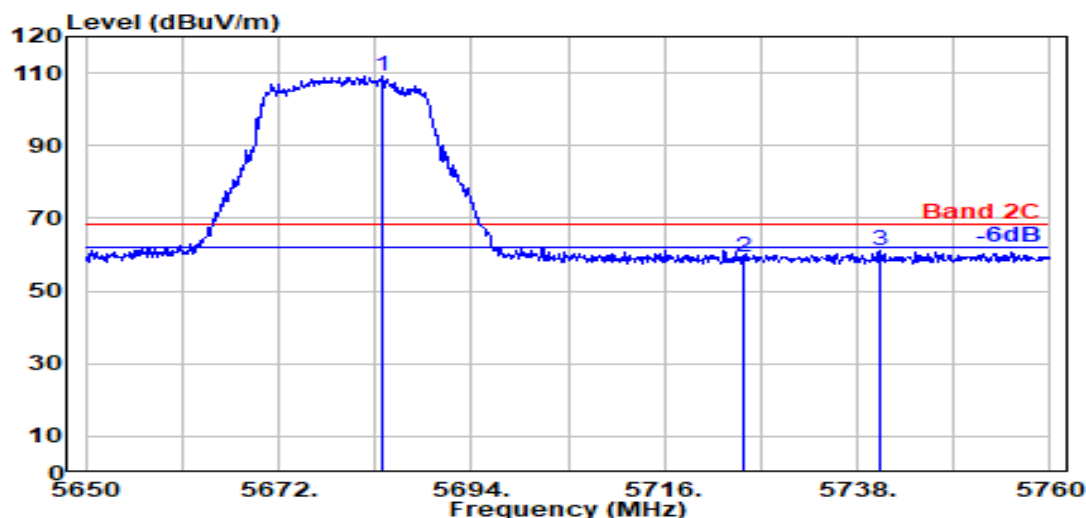

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.900	33.86	8.86	34.26	100.56	109.02	---	---	Peak
5725.000	33.80	8.88	34.28	51.05	59.45	68.20	8.75	Peak
5740.500	33.80	8.89	34.28	52.53	60.93	68.20	7.27	Peak

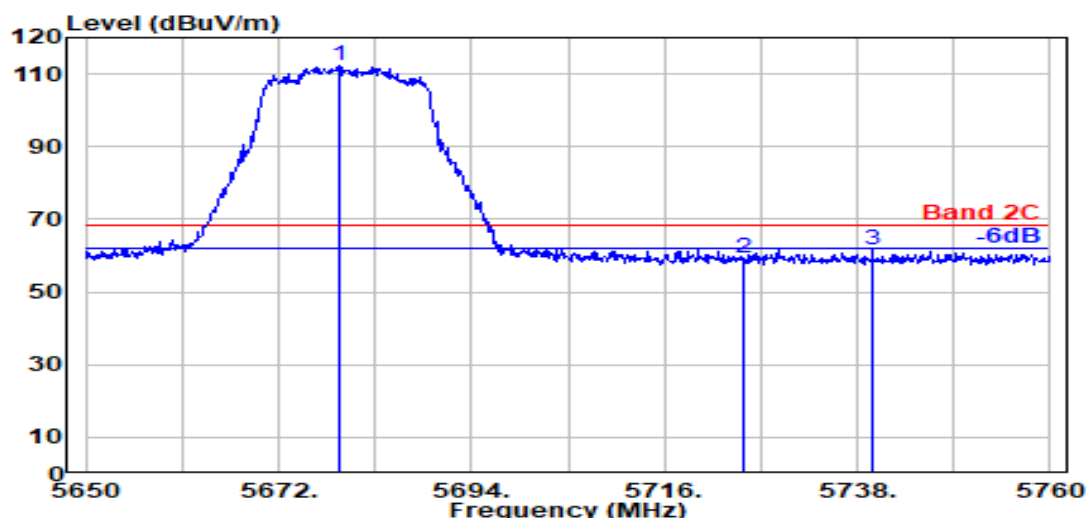

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.800	33.88	8.85	34.25	103.64	112.13	---	---	Peak
5725.000	33.80	8.88	34.28	50.70	59.11	68.20	9.09	Peak
5739.700	33.80	8.89	34.28	53.16	61.57	68.20	6.63	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

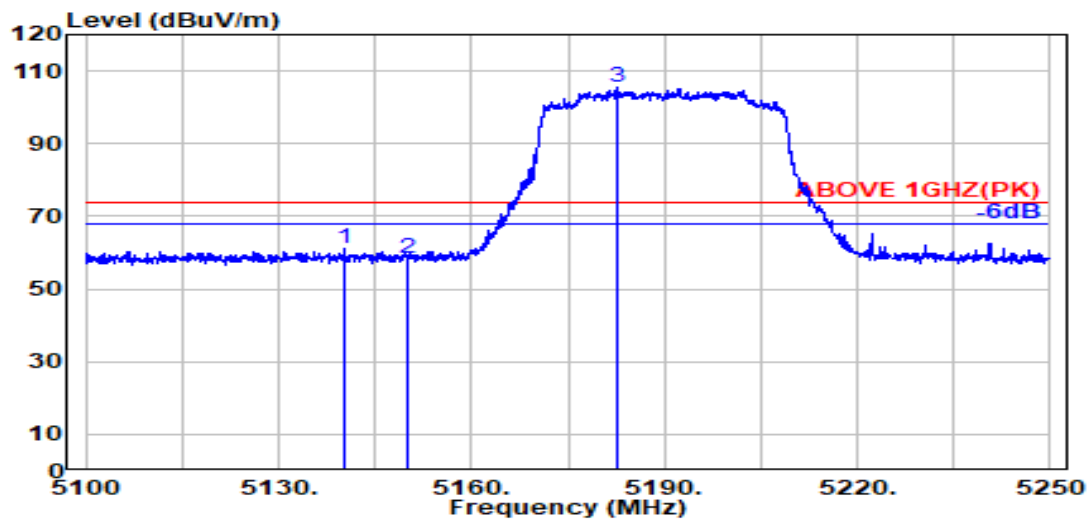

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.200	33.70	8.54	34.28	53.18	61.13	74.00	12.87	Peak
5150.000	33.70	8.54	34.28	50.46	58.43	74.00	15.57	Peak
@ 5182.800	33.70	8.56	34.27	97.31	105.30	---	---	Peak

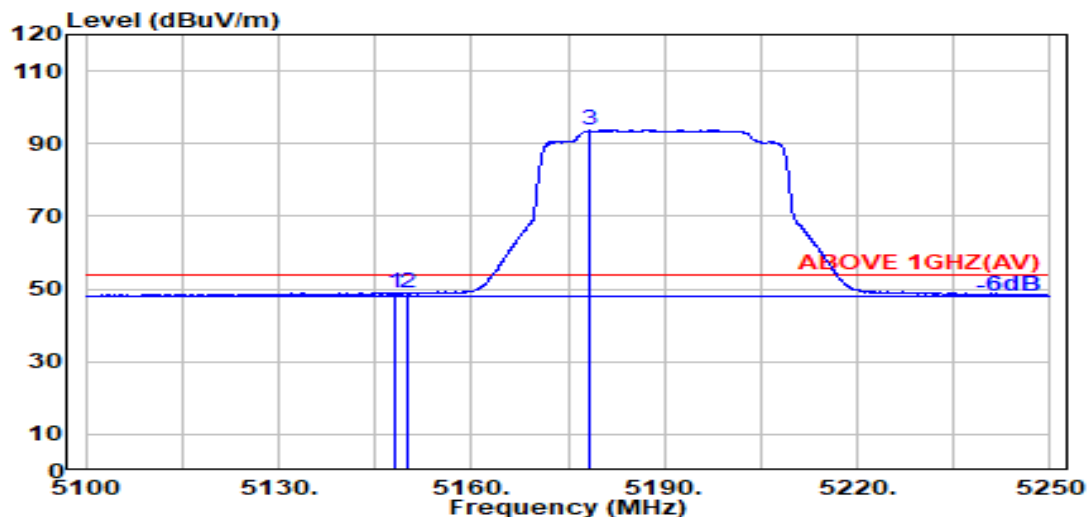

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.70	8.54	34.28	40.94	48.90	54.00	5.10	Average
5150.000	33.70	8.54	34.28	40.76	48.72	54.00	5.28	Average
@ 5178.500	33.70	8.56	34.27	85.84	93.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

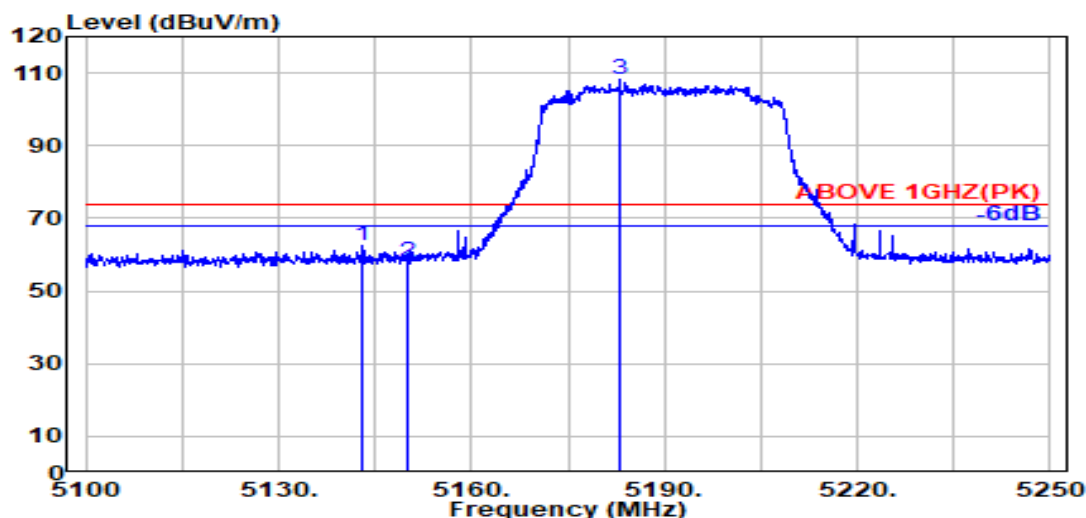

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.100	33.70	8.54	34.28	54.42	62.37	74.00	11.63	Peak
5150.000	33.70	8.54	34.28	50.10	58.06	74.00	15.94	Peak
@ 5183.000	33.70	8.56	34.27	100.42	108.42	---	---	Peak

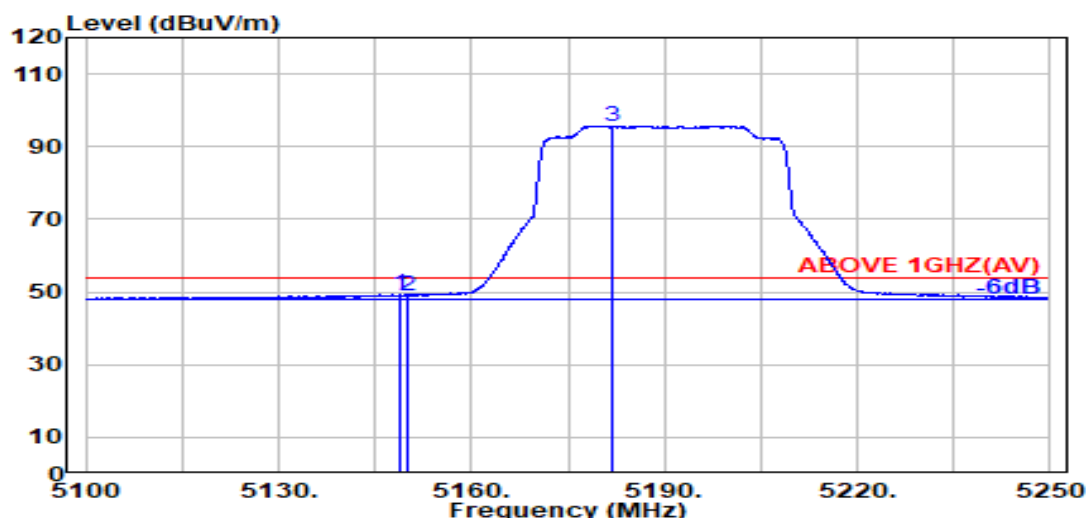

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.70	8.54	34.28	41.23	49.19	54.00	4.81	Average
5150.000	33.70	8.54	34.28	41.16	49.12	54.00	4.88	Average
@ 5182.000	33.70	8.56	34.27	87.71	95.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

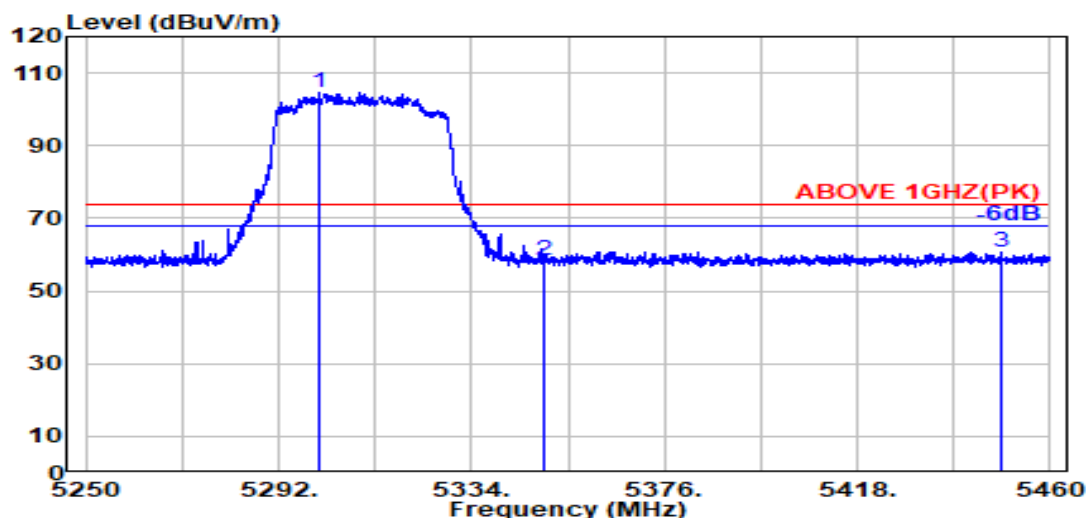

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.800	34.10	8.64	34.23	96.14	104.64	---	---	Peak
5350.000	33.90	8.67	34.22	50.25	58.60	74.00	15.40	Peak
5449.100	34.20	8.72	34.19	52.10	60.84	74.00	13.16	Peak

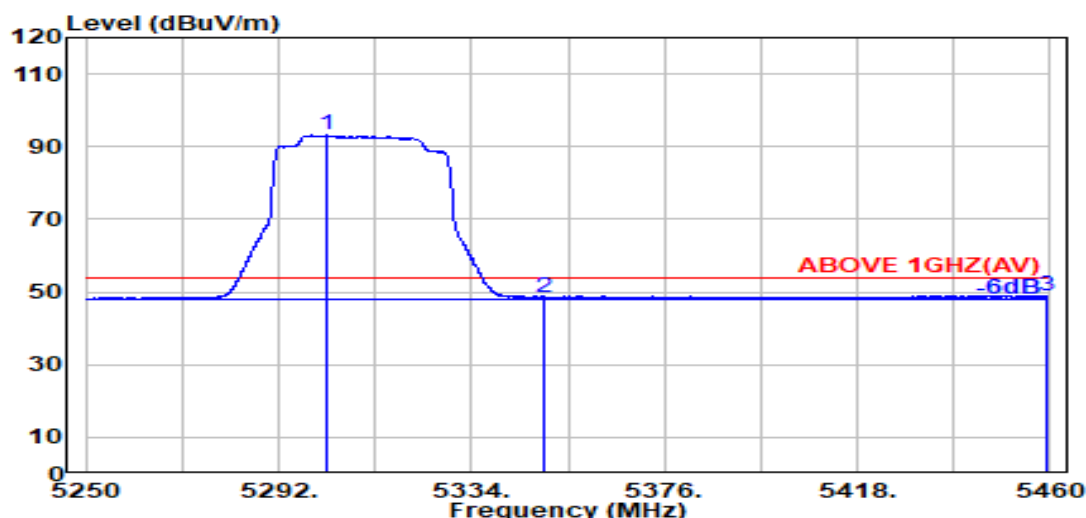

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.400	34.09	8.64	34.23	84.61	93.10	---	---	Average
5350.000	33.90	8.67	34.22	40.18	48.53	54.00	5.47	Average
5459.500	34.18	8.73	34.18	40.37	49.10	54.00	4.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

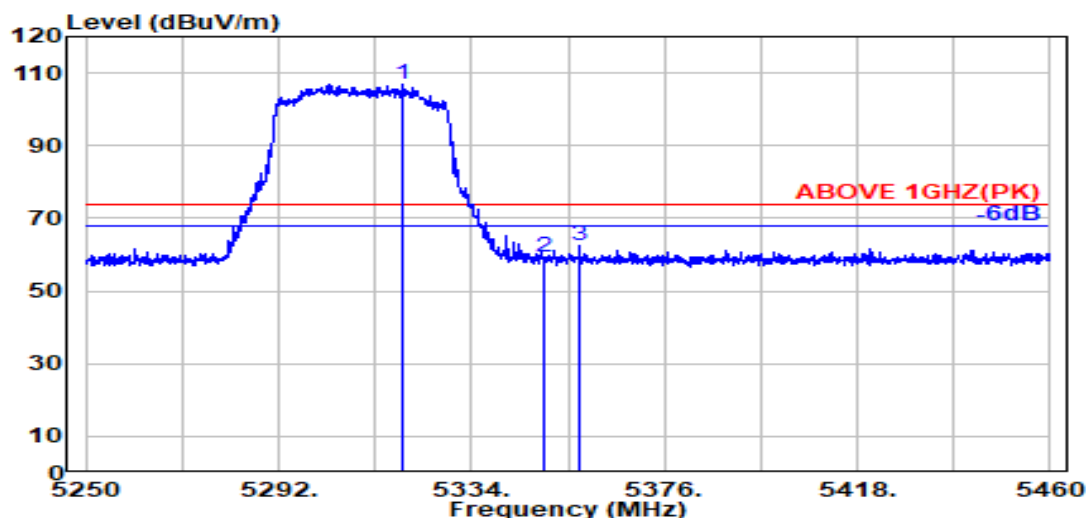

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.100	34.02	8.65	34.23	98.61	107.06	---	---	Peak
5350.000	33.90	8.67	34.22	50.85	59.20	74.00	14.80	Peak
5357.600	33.93	8.67	34.21	54.24	62.63	74.00	11.37	Peak

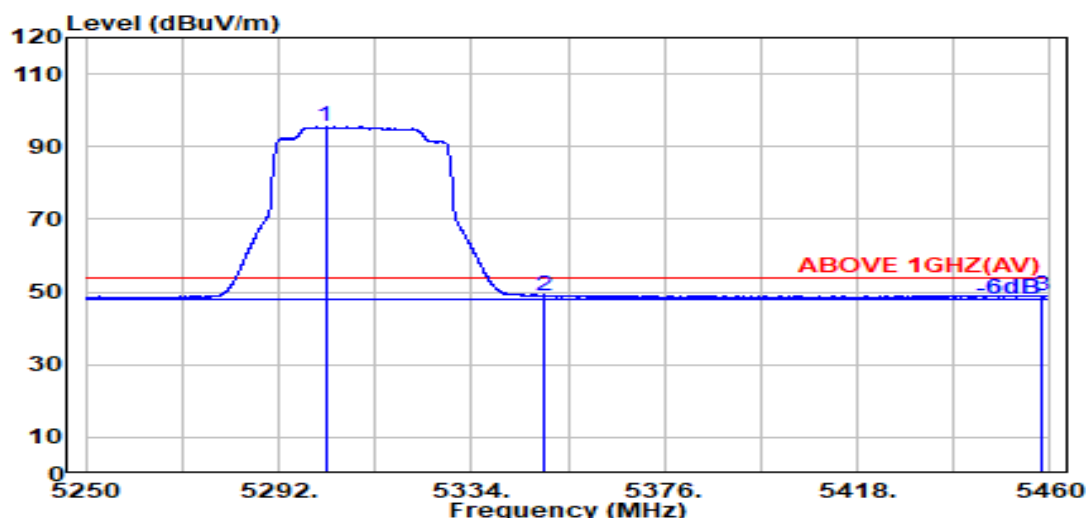

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.200	34.09	8.64	34.23	86.95	95.45	---	---	Average
5350.000	33.90	8.67	34.22	40.66	49.01	54.00	4.99	Average
5458.200	34.18	8.73	34.18	40.38	49.11	54.00	4.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

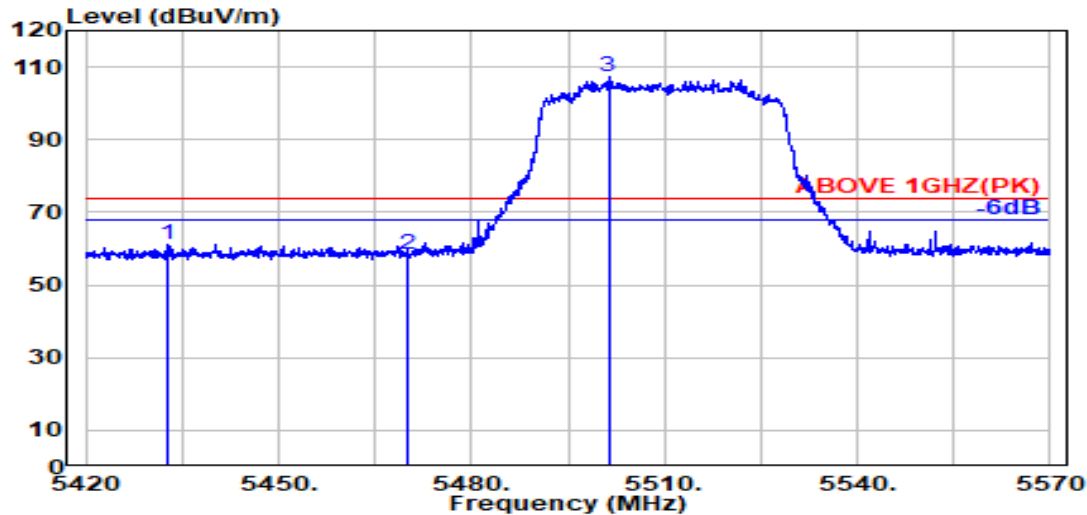

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.900	34.17	8.71	34.19	52.31	61.00	74.00	13.00	Peak
5470.000	34.16	8.74	34.18	49.75	58.47	74.00	15.53	Peak
@ 5501.300	34.10	8.75	34.17	98.54	107.22	---	---	Peak

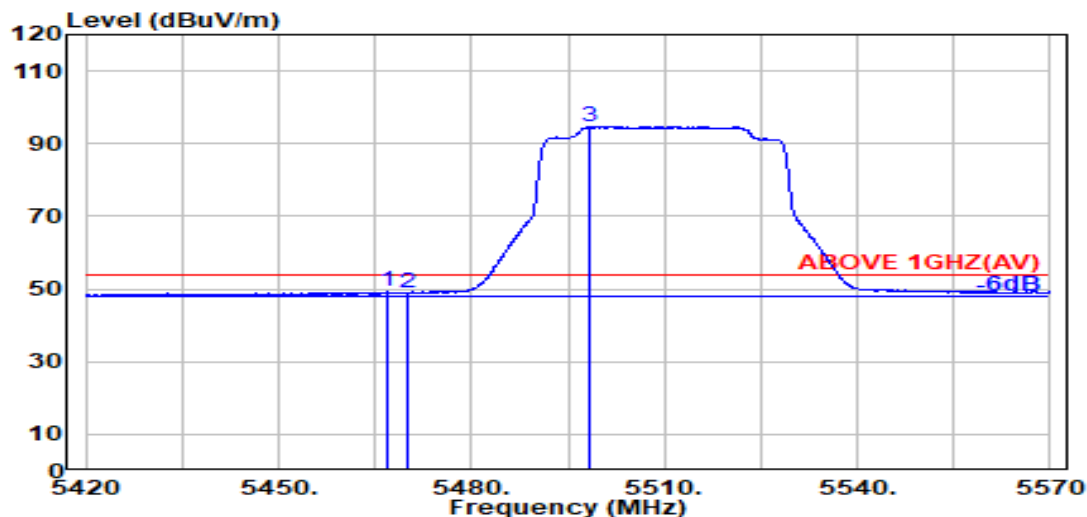

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.17	8.73	34.18	40.42	49.14	54.00	4.86	Average
5470.000	34.16	8.74	34.18	40.23	48.94	54.00	5.06	Average
@ 5498.300	34.10	8.75	34.17	86.02	94.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

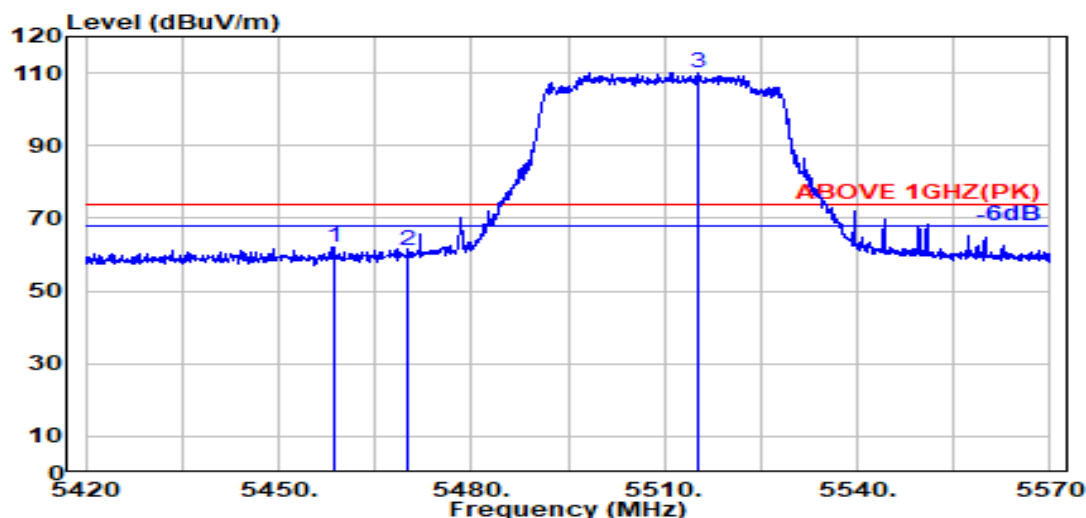

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.18	8.73	34.18	53.43	62.16	74.00	11.84	Peak
5470.000	34.16	8.74	34.18	52.64	61.36	74.00	12.64	Peak
@ 5515.300	34.10	8.76	34.18	101.42	110.10	---	---	Peak

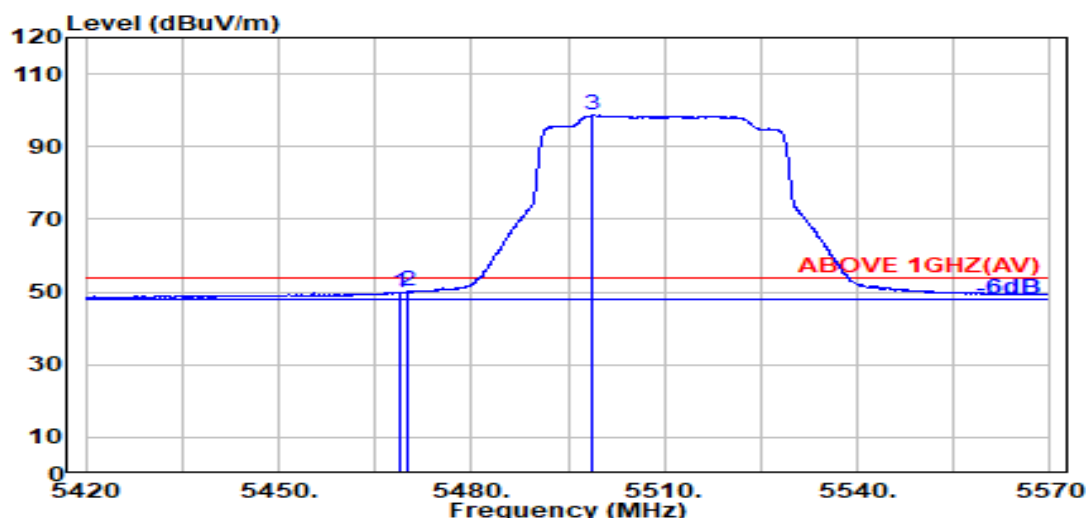

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	41.13	49.85	54.00	4.15	Average
5470.000	34.16	8.74	34.18	41.33	50.05	54.00	3.95	Average
@ 5498.600	34.10	8.75	34.17	89.91	98.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

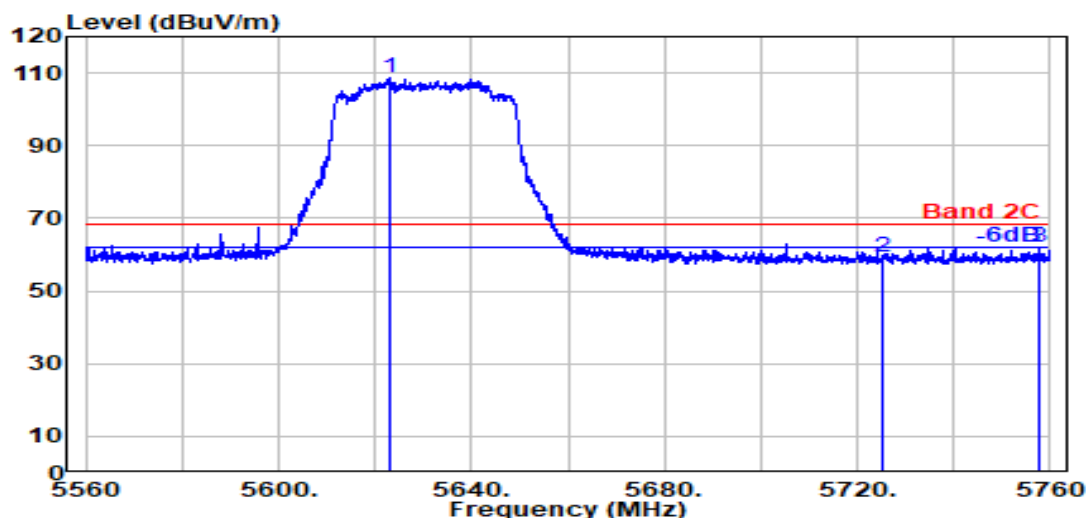

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5622.900	34.00	8.82	34.23	100.12	108.72	---	---	Peak
	5725.000	33.80	8.88	34.28	50.92	59.32	68.20	8.88	Peak
	5757.600	33.83	8.90	34.29	53.76	62.20	68.20	6.00	Peak

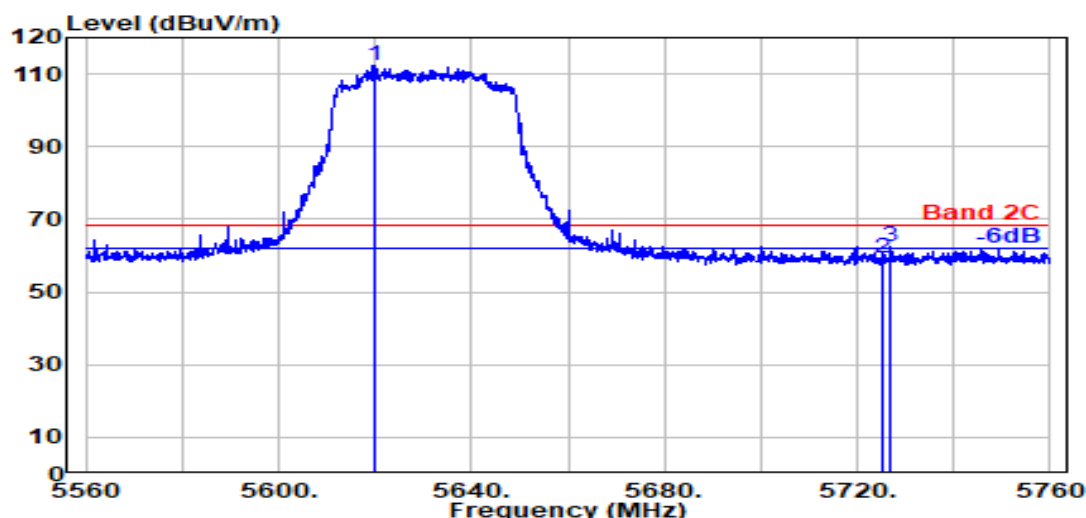

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5619.700	34.00	8.82	34.23	103.79	112.38	---	---	Peak
	5725.000	33.80	8.88	34.28	50.69	59.09	68.20	9.11	Peak
	5727.000	33.80	8.88	34.28	54.05	62.46	68.20	5.74	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

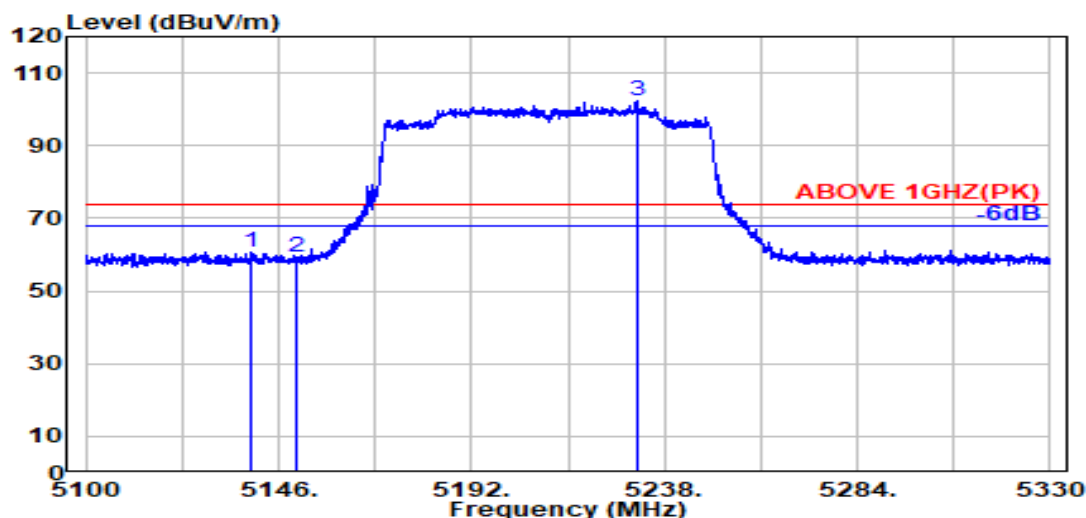

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.400	33.70	8.54	34.28	52.57	60.53	74.00	13.47	Peak
5150.000	33.70	8.54	34.28	51.53	59.49	74.00	14.51	Peak
@ 5231.300	33.76	8.59	34.25	94.39	102.49	---	---	Peak

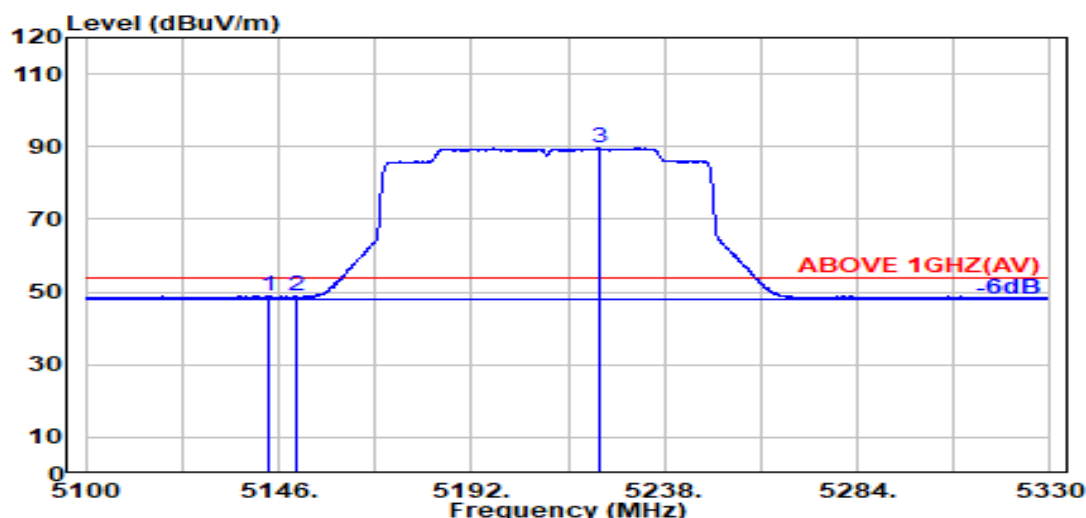

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5143.900	33.70	8.54	34.28	40.88	48.84	54.00	5.16	Average
5150.000	33.70	8.54	34.28	40.77	48.73	54.00	5.27	Average
5222.400	33.74	8.59	34.26	81.53	89.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

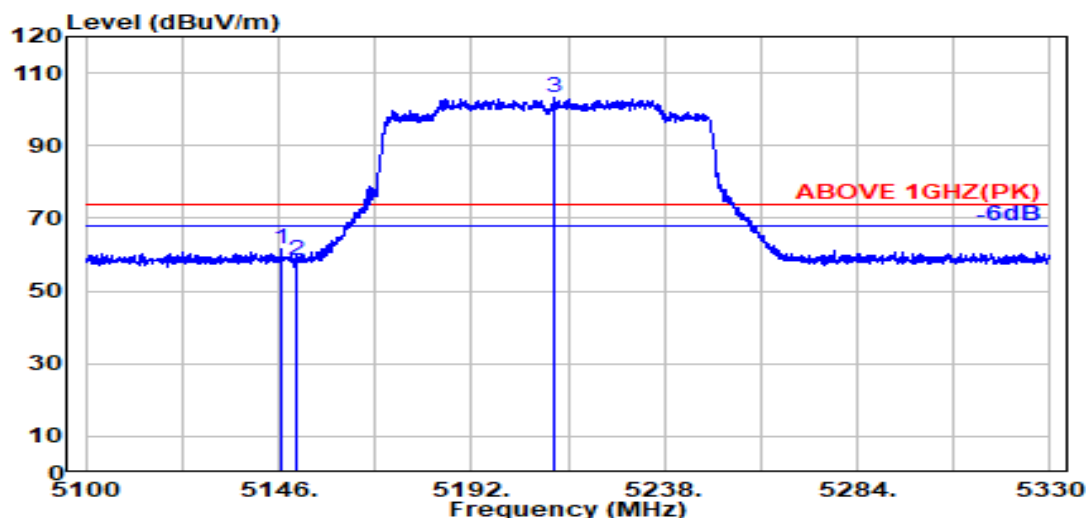

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	33.70	8.54	34.28	53.58	61.54	74.00	12.46	Peak
5150.000	33.70	8.54	34.28	50.56	58.52	74.00	15.48	Peak
@ 5211.700	33.72	8.58	34.26	95.15	103.20	---	---	Peak

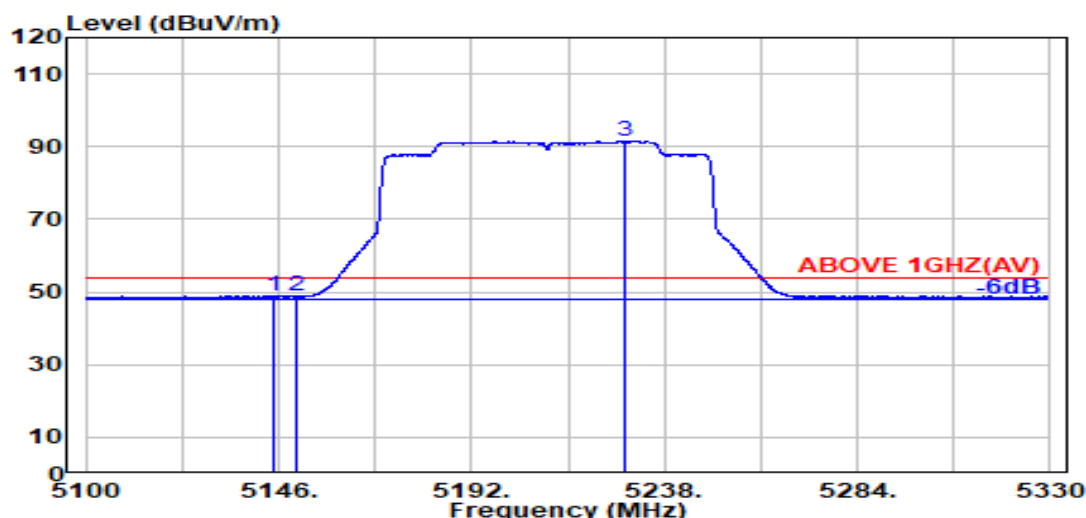

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5144.600	33.70	8.54	34.28	41.01	48.97	54.00	5.03	Average
5150.000	33.70	8.54	34.28	40.87	48.84	54.00	5.16	Average
5228.300	33.76	8.59	34.26	83.48	91.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

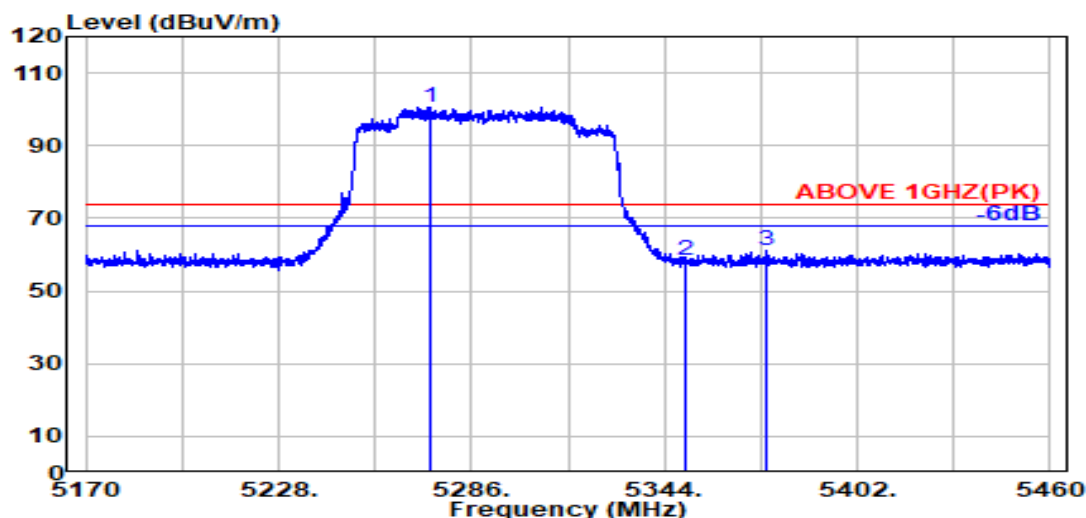

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5273.300	33.94	8.62	34.24	92.41	100.73	---	---	Peak
5350.000	33.90	8.67	34.22	49.85	58.20	74.00	15.80	Peak
@ 5374.600	34.00	8.68	34.21	52.45	60.92	74.00	13.08	Peak

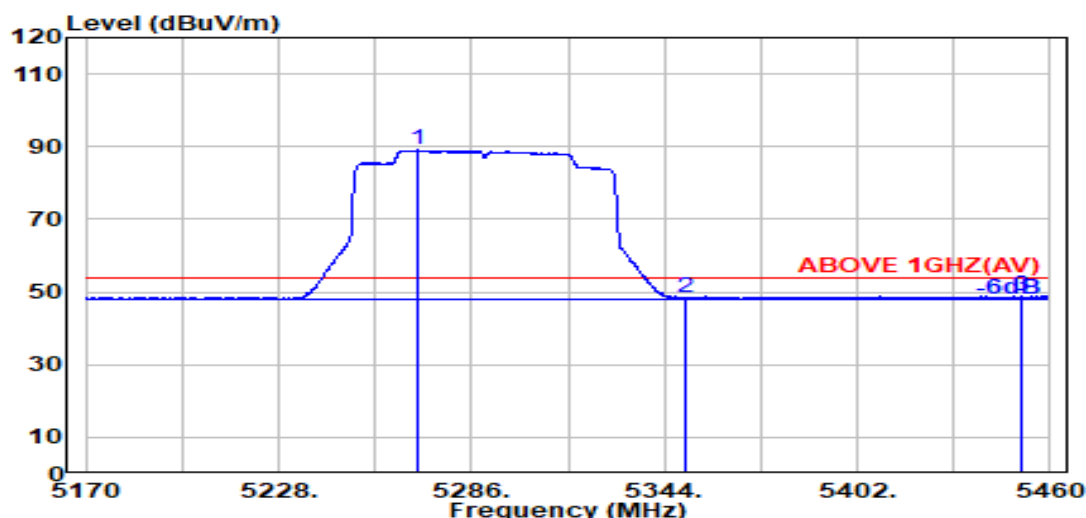

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.700	33.92	8.62	34.24	80.76	89.06	---	---	Average
5350.000	33.90	8.67	34.22	39.88	48.23	54.00	5.77	Average
5451.500	34.20	8.73	34.18	40.15	48.89	54.00	5.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

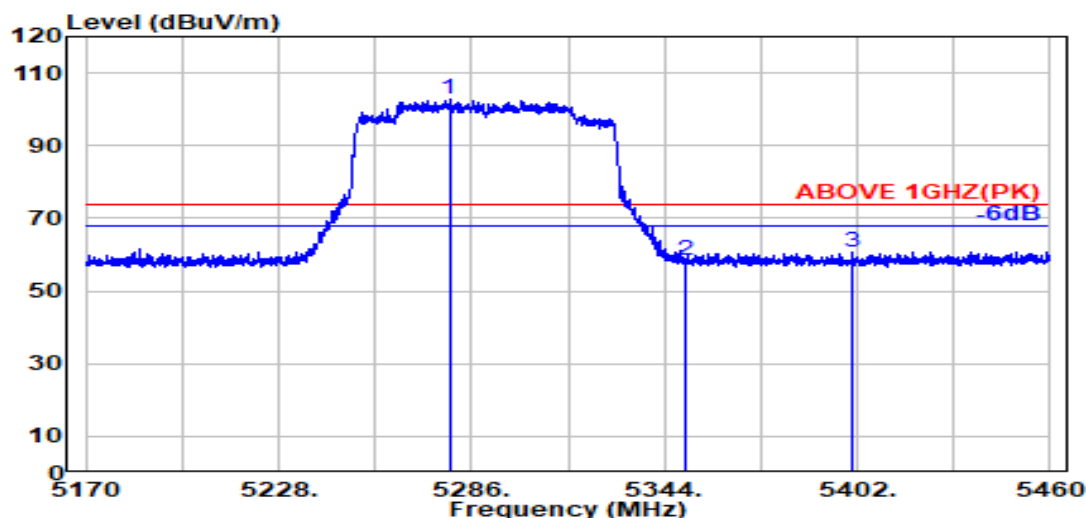

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5279.300	33.98	8.62	34.24	94.57	102.93	---	---	Peak
5350.000	33.90	8.67	34.22	49.91	58.26	74.00	15.74	Peak
@ 5400.500	34.10	8.70	34.20	52.29	60.88	74.00	13.12	Peak

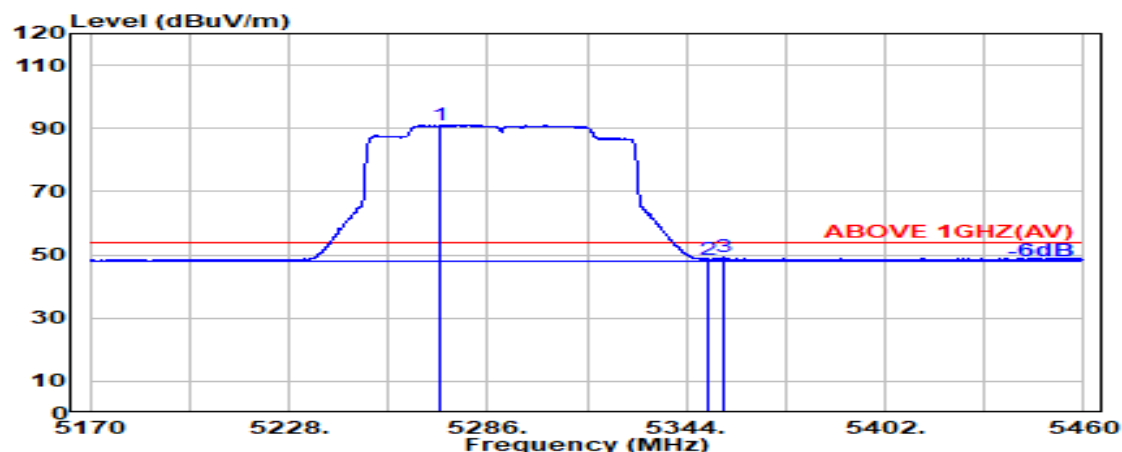

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.300	33.93	8.62	34.24	82.76	91.07	---	---	Average
5350.000	33.90	8.67	34.22	40.09	48.44	54.00	5.56	Average
5355.200	33.92	8.67	34.21	40.82	49.19	54.00	4.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

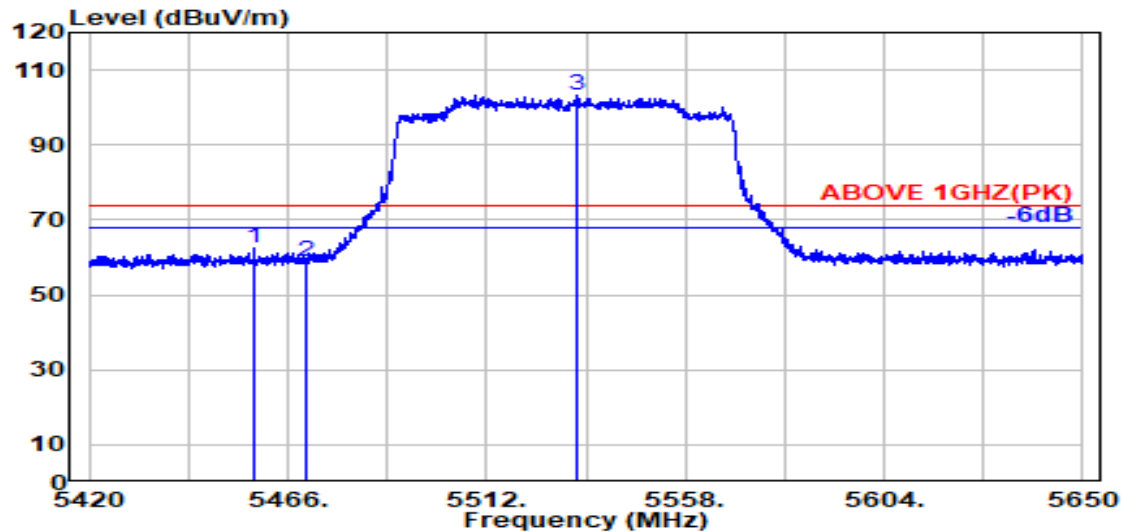

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.18	8.73	34.18	53.71	62.44	74.00	11.56	Peak
5470.000	34.16	8.74	34.18	50.32	59.03	74.00	14.97	Peak
@ 5532.800	34.10	8.77	34.19	94.47	103.16	---	---	Peak

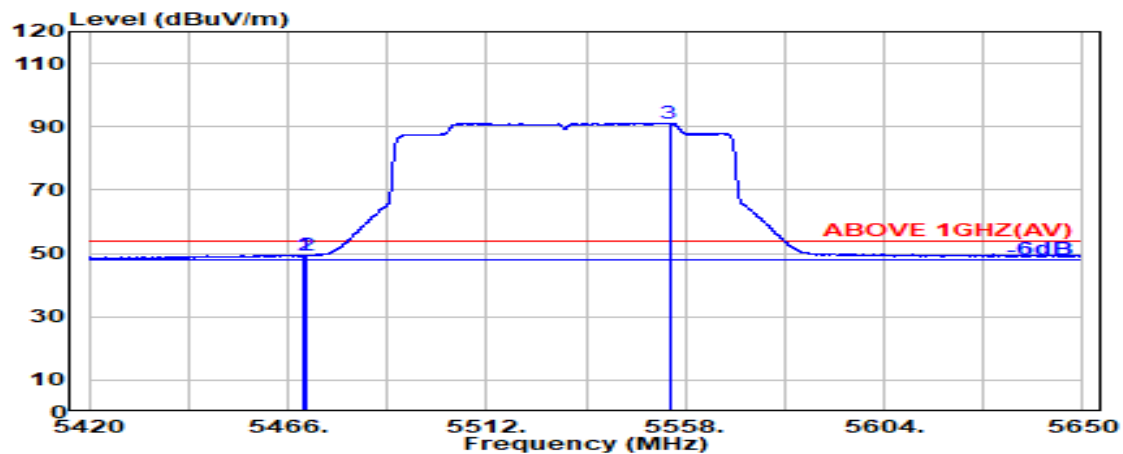

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5469.800	34.16	8.74	34.18	40.75	49.46	54.00	4.54	Average
5470.000	34.16	8.74	34.18	40.49	49.21	54.00	4.79	Average
5554.300	34.09	8.78	34.20	82.54	91.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

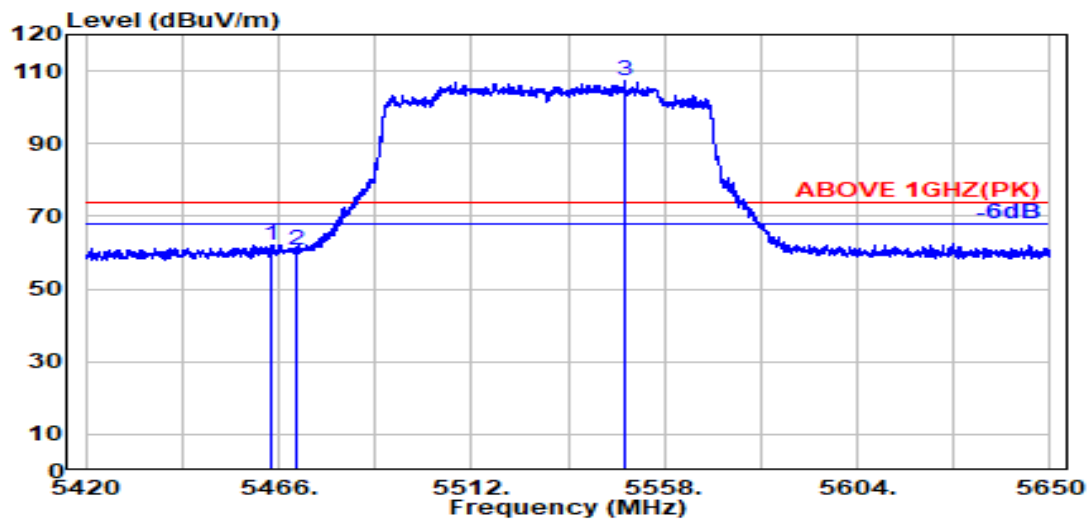

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.17	8.73	34.18	53.49	62.21	74.00	11.79	Peak
5470.000	34.16	8.74	34.18	52.12	60.84	74.00	13.16	Peak
@ 5548.500	34.10	8.78	34.19	98.46	107.15	---	---	Peak

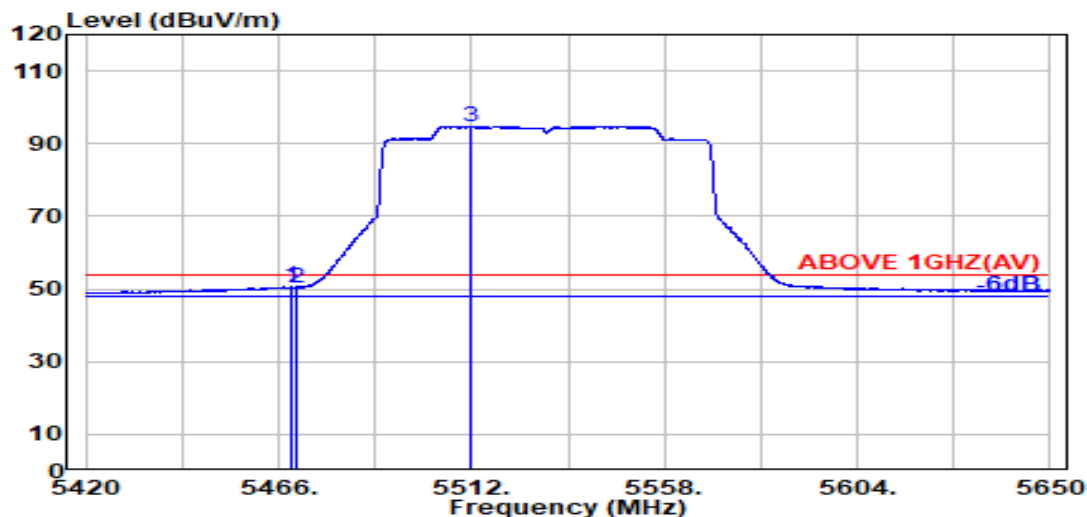

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.800	34.16	8.74	34.18	41.82	50.54	54.00	3.46	Average
5470.000	34.16	8.74	34.18	41.74	50.46	54.00	3.54	Average
5512.000	34.10	8.76	34.18	86.13	94.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

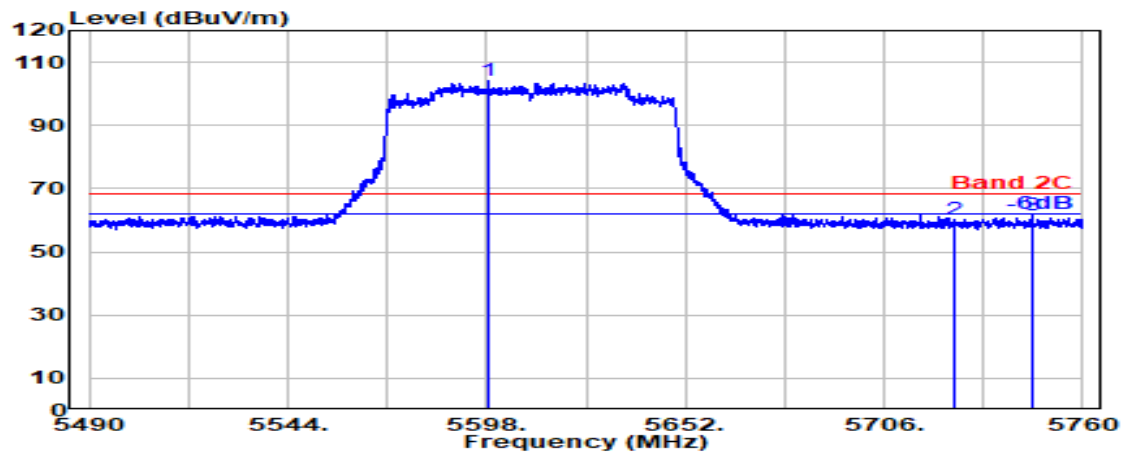

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5598.400	34.00	8.81	34.22	95.54	104.14	---	---	Peak
5725.000	33.80	8.88	34.28	51.67	60.07	68.20	8.13	Peak
@ 5746.000	33.80	8.89	34.29	53.33	61.74	68.20	6.46	Peak

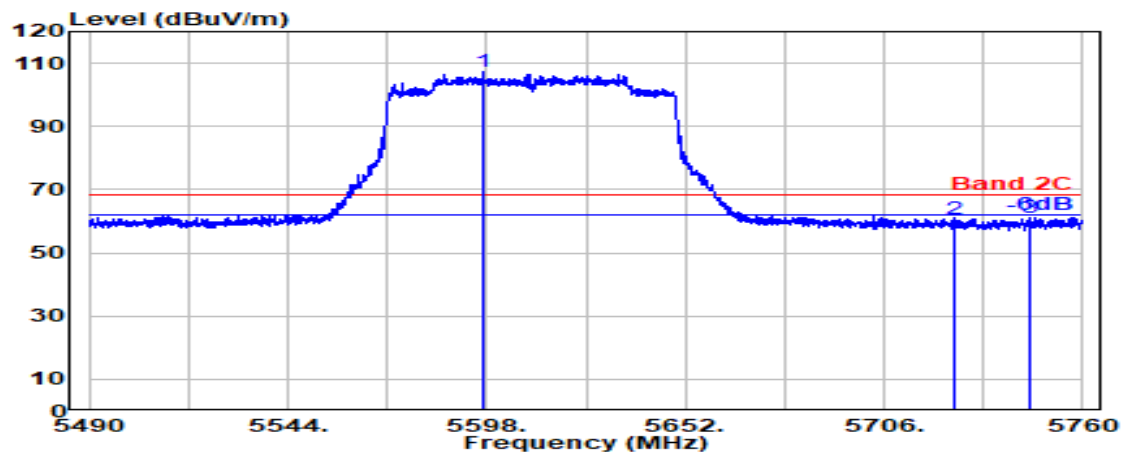

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5596.900	34.01	8.81	34.22	98.58	107.18	---	---	Peak
5725.000	33.80	8.88	34.28	52.14	60.55	68.20	7.65	Peak
5745.500	33.80	8.89	34.29	52.91	61.32	68.20	6.88	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

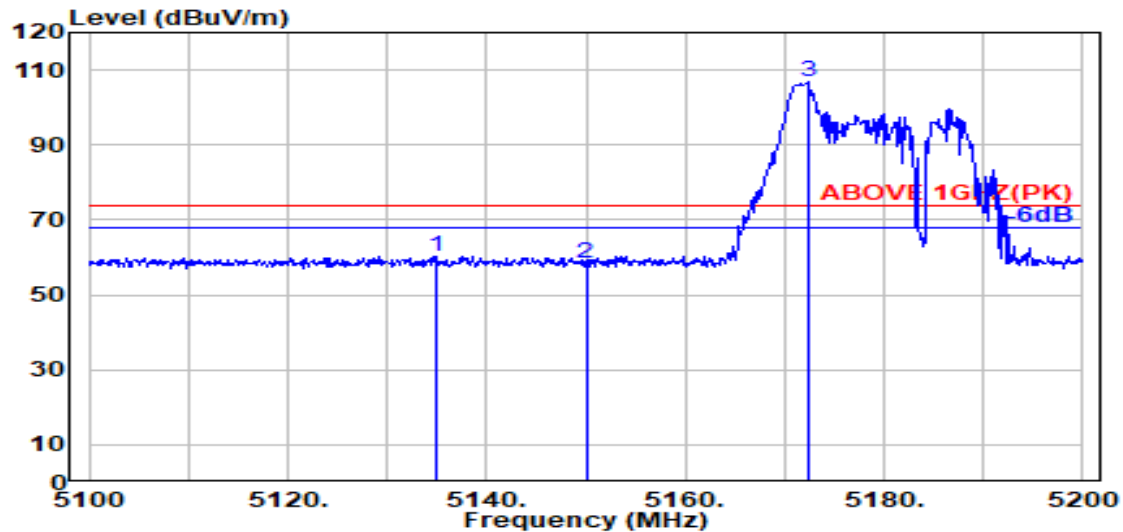

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.900	33.70	8.53	34.29	52.44	60.39	74.00	13.61	Peak
5150.000	33.70	8.54	34.28	50.59	58.55	74.00	15.45	Peak
@ 5172.300	33.70	8.56	34.27	98.80	106.78	---	---	Peak

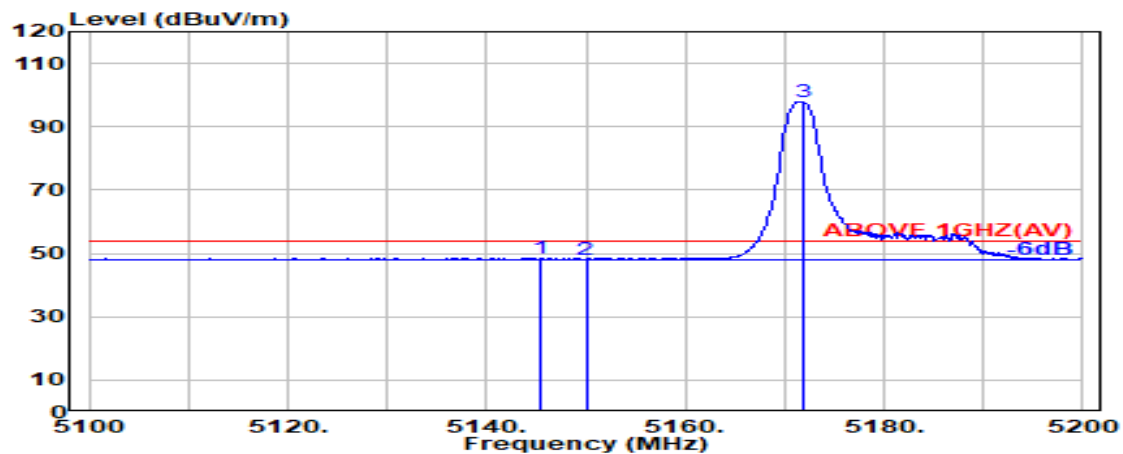

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	33.70	8.54	34.28	40.47	48.43	54.00	5.57	Average
5150.000	33.70	8.54	34.28	40.22	48.18	54.00	5.82	Average
@ 5171.800	33.70	8.56	34.27	89.97	97.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

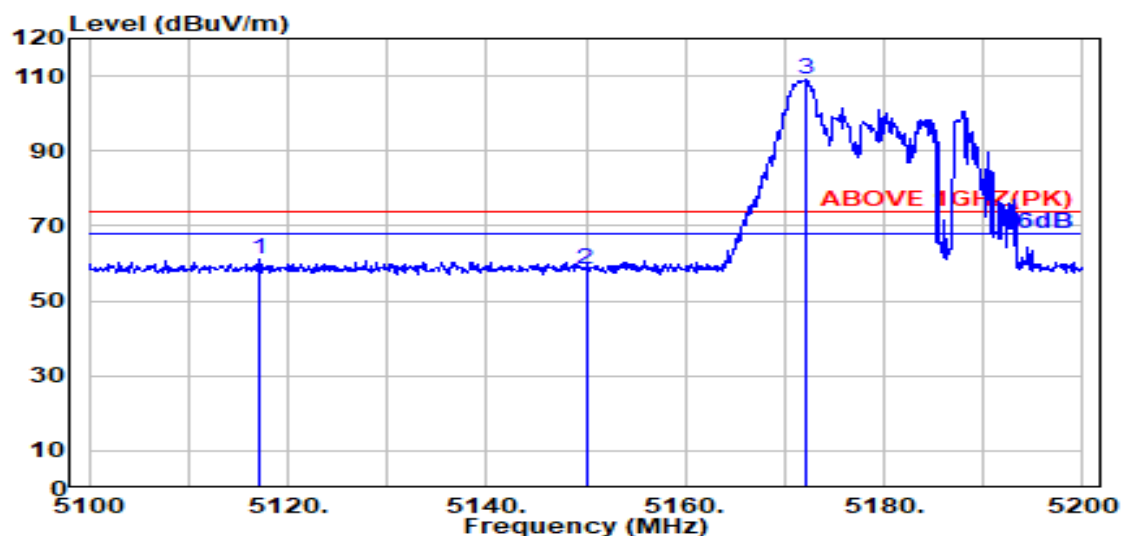

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.100	33.70	8.52	34.29	53.24	61.17	74.00	12.83	Peak
5150.000	33.70	8.54	34.28	50.53	58.50	74.00	15.50	Peak
@ 5172.100	33.70	8.56	34.27	101.19	109.18	---	---	Peak

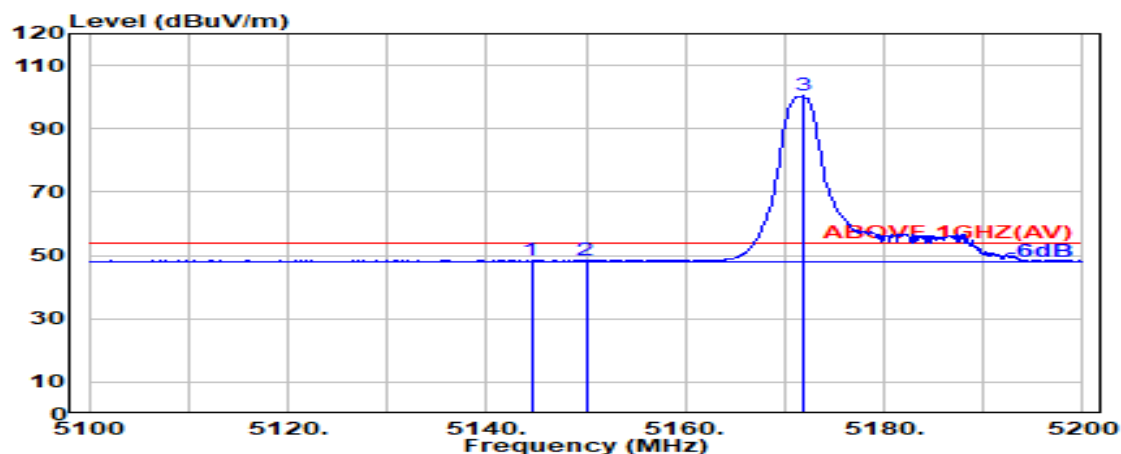

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.500	33.70	8.54	34.28	40.51	48.47	54.00	5.53	Average
5150.000	33.70	8.54	34.28	40.27	48.23	54.00	5.77	Average
@ 5171.800	33.70	8.56	34.27	92.45	100.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

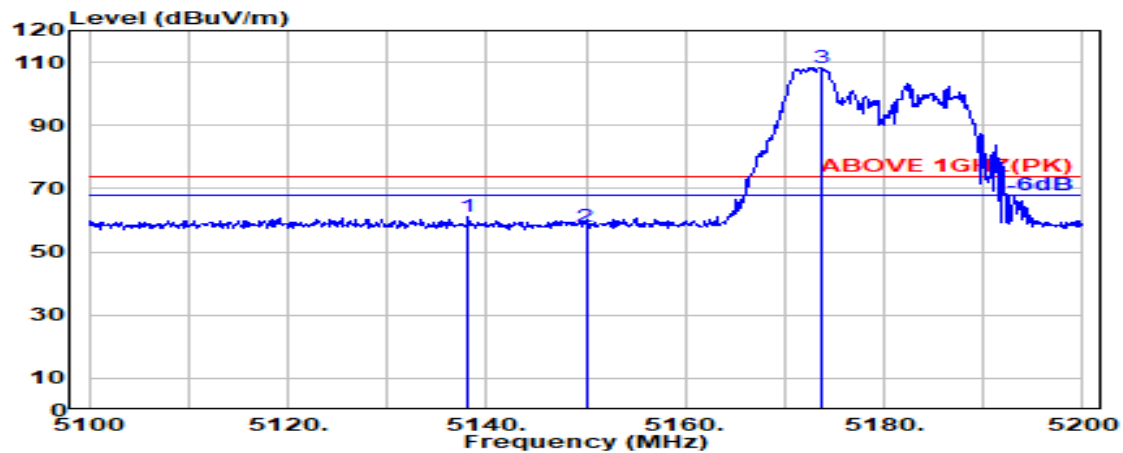

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.200	33.70	8.54	34.28	53.10	61.05	74.00	12.95	Peak
5150.000	33.70	8.54	34.28	49.78	57.74	74.00	16.26	Peak
@ 5173.700	33.70	8.56	34.27	100.41	108.40	---	---	Peak

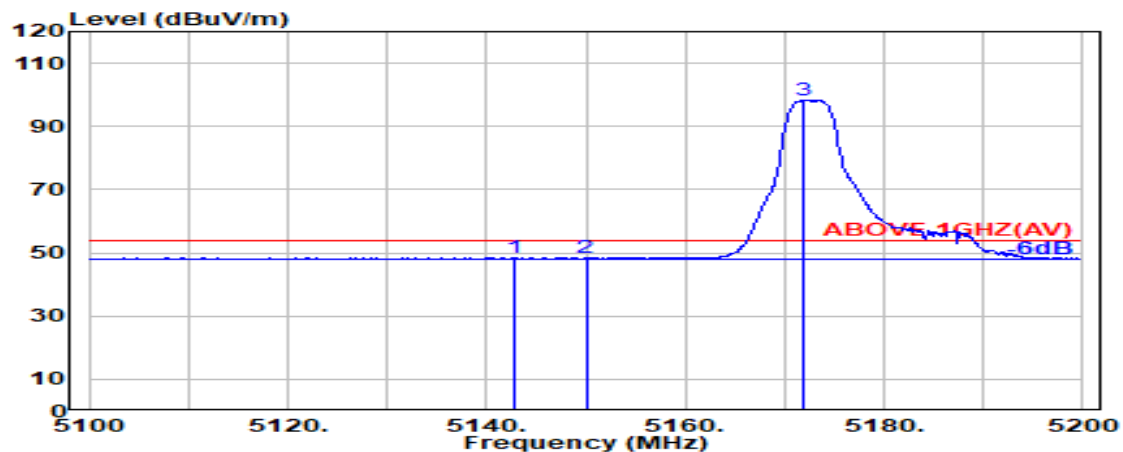

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	33.70	8.54	34.28	40.45	48.41	54.00	5.59	Average
5150.000	33.70	8.54	34.28	40.32	48.29	54.00	5.71	Average
@ 5171.900	33.70	8.56	34.27	90.30	98.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

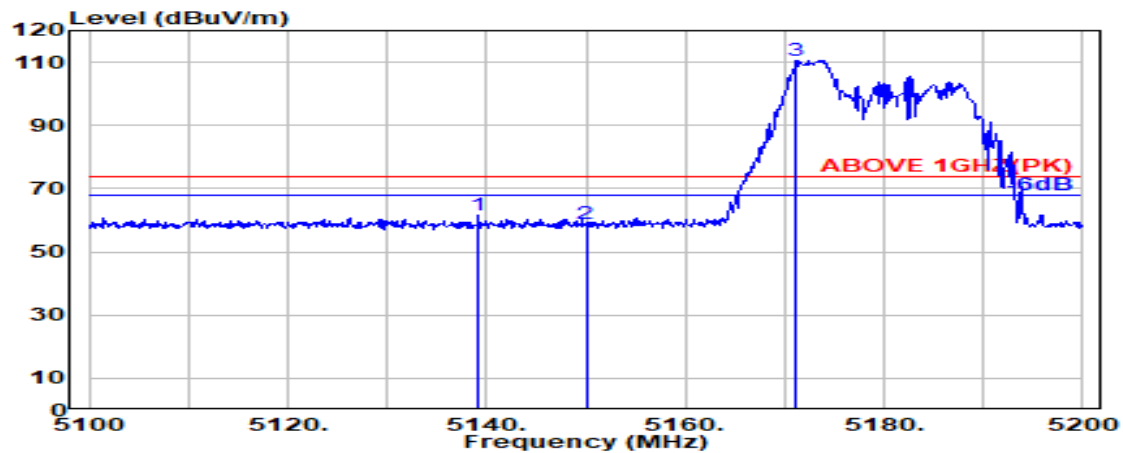

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.200	33.70	8.54	34.28	53.65	61.61	74.00	12.39	Peak
5150.000	33.70	8.54	34.28	50.70	58.66	74.00	15.34	Peak
@ 5171.200	33.70	8.56	34.27	102.71	110.69	---	---	Peak

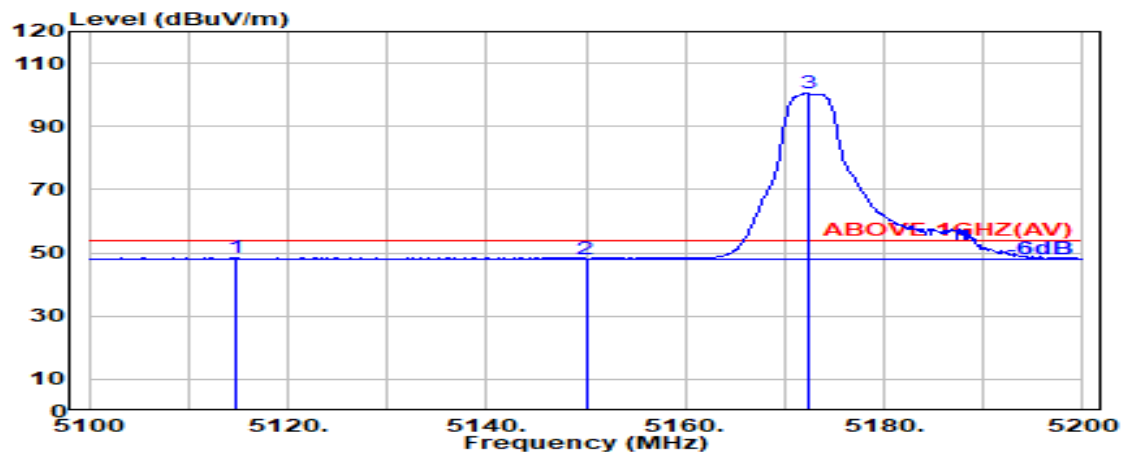

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.700	33.70	8.52	34.29	40.51	48.44	54.00	5.56	Average
5150.000	33.70	8.54	34.28	40.21	48.18	54.00	5.82	Average
@ 5172.300	33.70	8.56	34.27	92.41	100.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

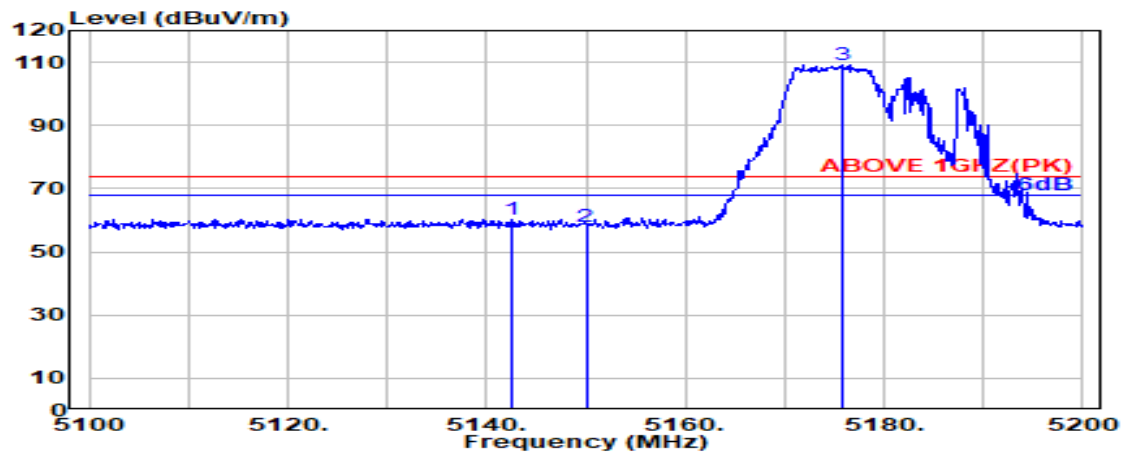

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.600	33.70	8.54	34.28	52.49	60.45	74.00	13.55	Peak
5150.000	33.70	8.54	34.28	50.05	58.01	74.00	15.99	Peak
@ 5175.700	33.70	8.56	34.27	101.11	109.10	---	---	Peak

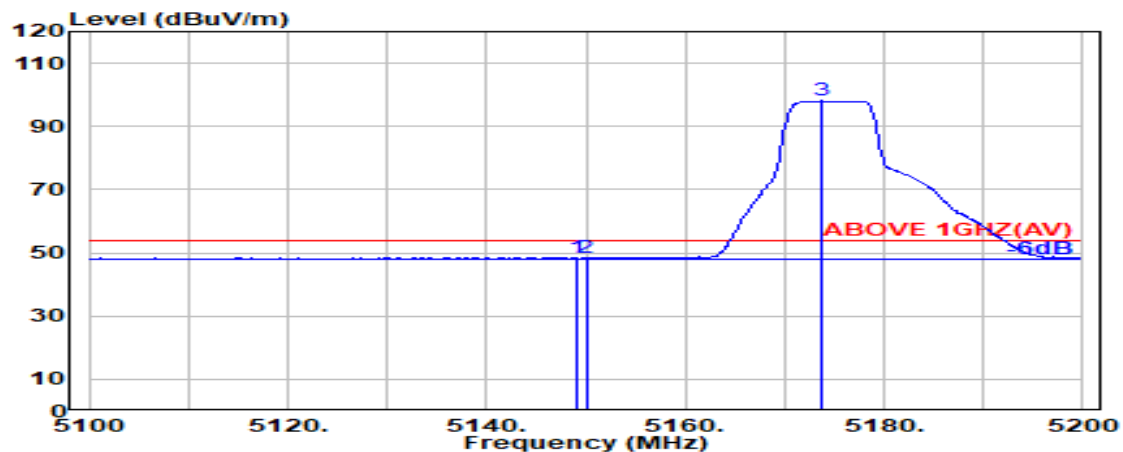

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.70	8.54	34.28	40.50	48.47	54.00	5.53	Average
5150.000	33.70	8.54	34.28	40.28	48.25	54.00	5.75	Average
@ 5173.800	33.70	8.56	34.27	90.07	98.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

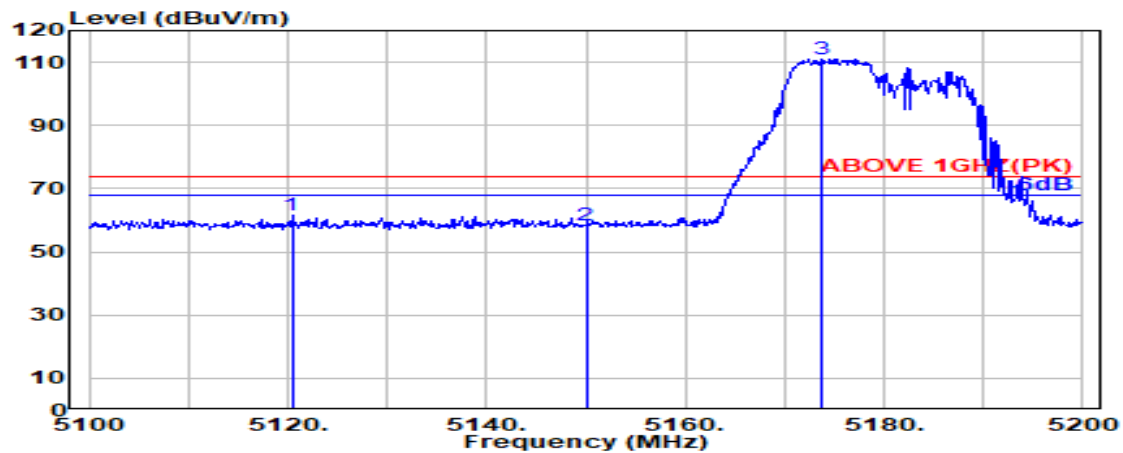

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.400	33.70	8.53	34.29	53.58	61.51	74.00	12.49	Peak
5150.000	33.70	8.54	34.28	50.57	58.54	74.00	15.46	Peak
@ 5173.600	33.70	8.56	34.27	103.09	111.08	---	---	Peak

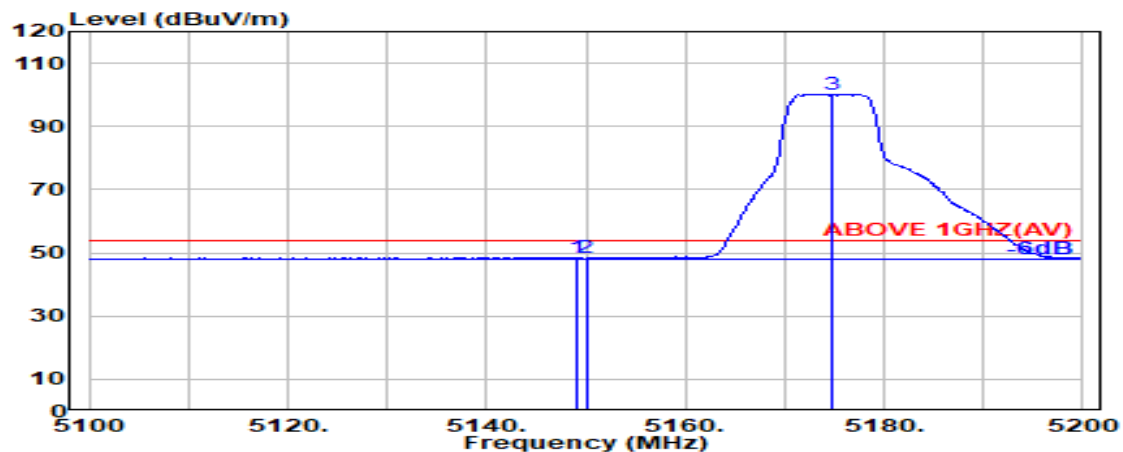

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.70	8.54	34.28	40.55	48.52	54.00	5.48	Average
5150.000	33.70	8.54	34.28	40.33	48.30	54.00	5.70	Average
@ 5174.700	33.70	8.56	34.27	92.13	100.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

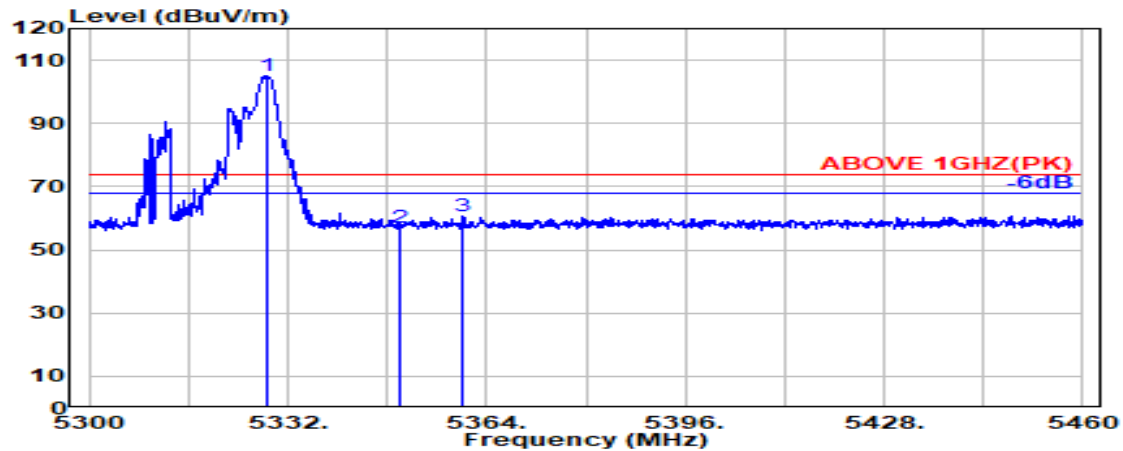

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.99	8.65	34.22	96.64	105.05	---	---	Peak
5350.000	33.90	8.67	34.22	48.86	57.21	74.00	16.79	Peak
5360.300	33.94	8.67	34.21	52.39	60.79	74.00	13.21	Peak

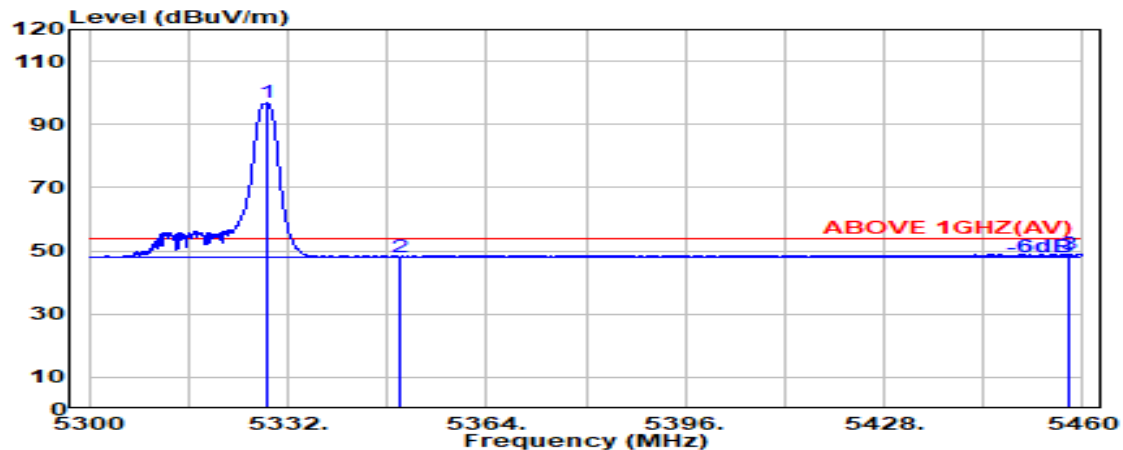

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.99	8.65	34.22	88.36	96.78	---	---	Average
5350.000	33.90	8.67	34.22	39.82	48.17	54.00	5.83	Average
5457.700	34.18	8.73	34.18	40.19	48.92	54.00	5.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

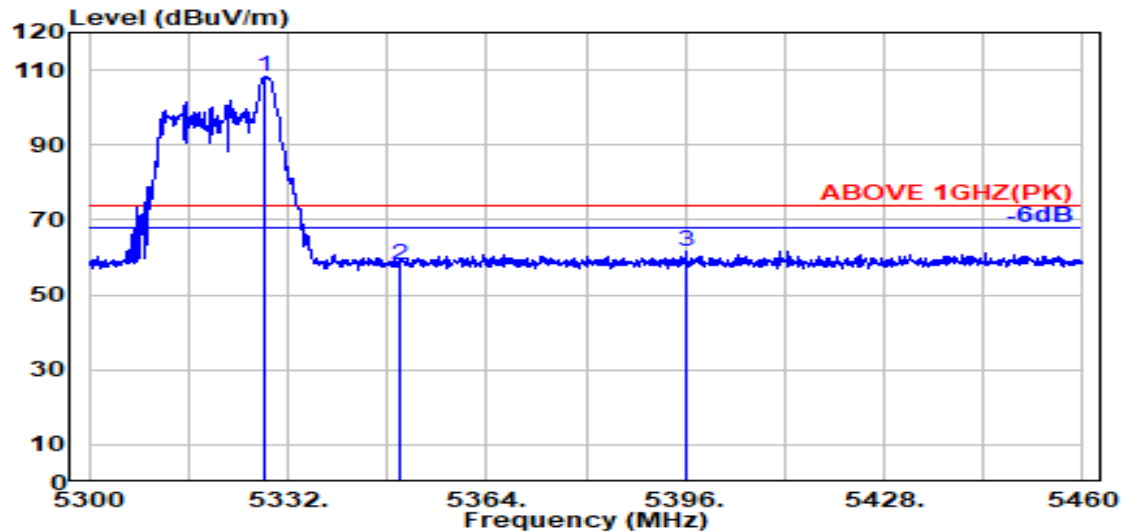

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.99	8.65	34.22	99.68	108.09	---	---	Peak
5350.000	33.90	8.67	34.22	49.81	58.15	74.00	15.85	Peak
5396.200	34.08	8.69	34.20	52.99	61.57	74.00	12.43	Peak

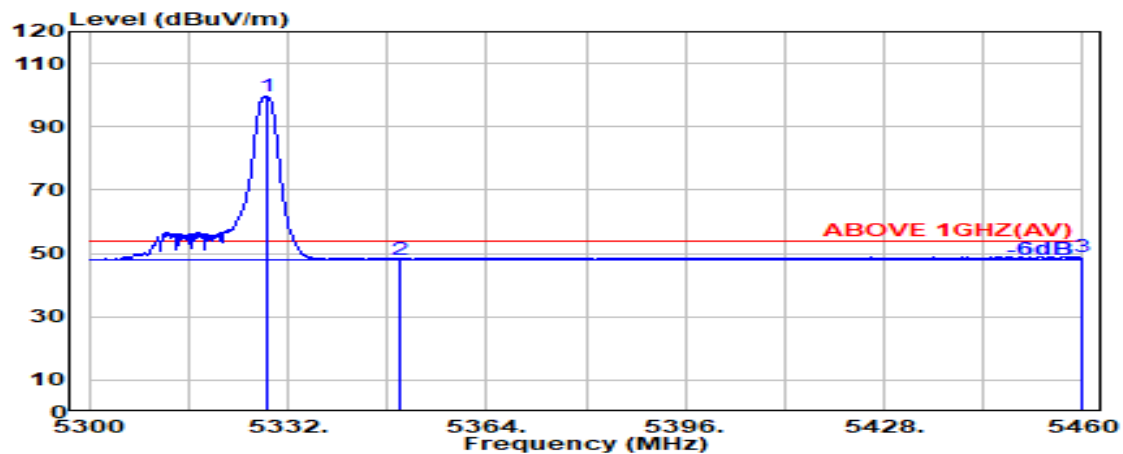

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	33.98	8.65	34.22	91.15	99.56	---	---	Average
5350.000	33.90	8.67	34.22	39.79	48.14	54.00	5.86	Average
5459.700	34.18	8.73	34.18	40.14	48.87	54.00	5.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

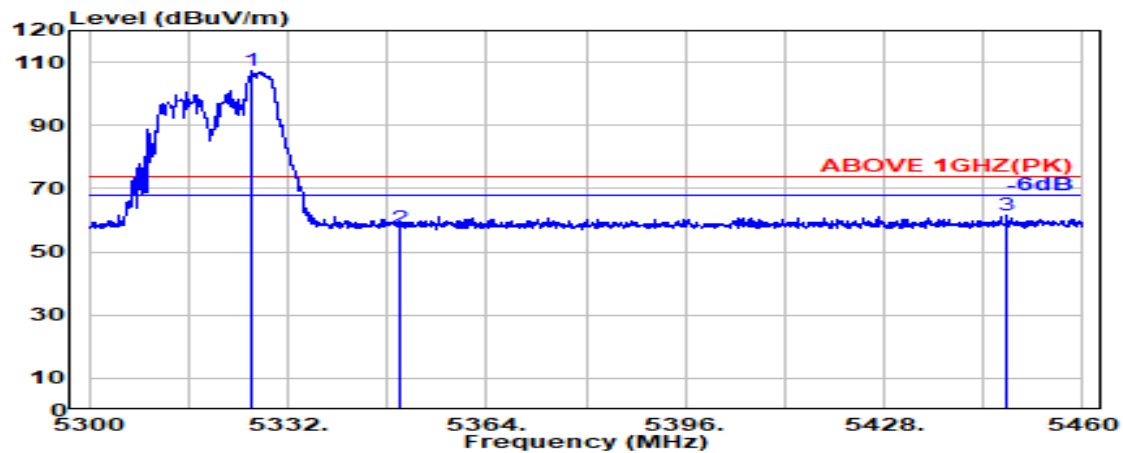

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.300	33.99	8.65	34.22	98.77	107.19	---	---	Peak
5350.000	33.90	8.67	34.22	49.08	57.43	74.00	16.57	Peak
5447.800	34.20	8.72	34.19	52.64	61.37	74.00	12.63	Peak

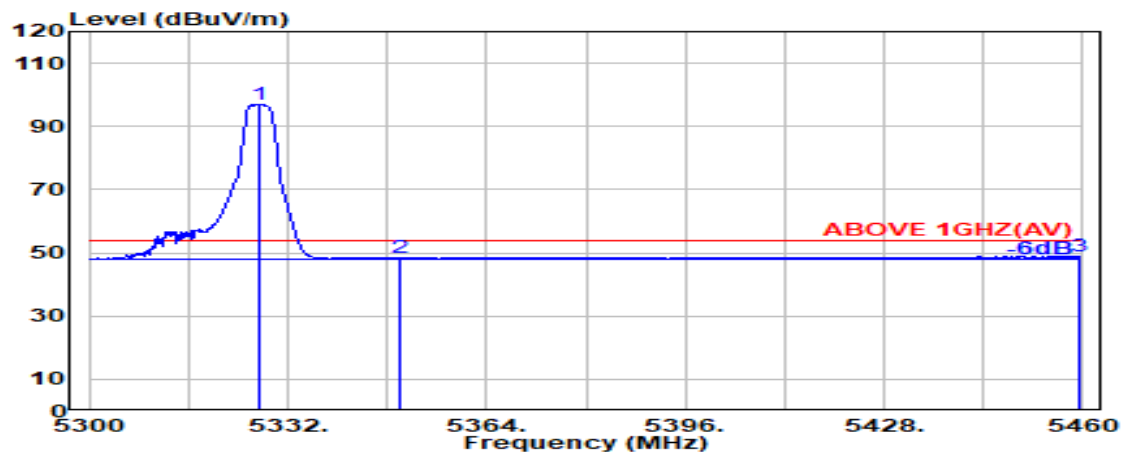

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	33.99	8.65	34.22	88.48	96.90	---	---	Average
5350.000	33.90	8.67	34.22	39.93	48.28	54.00	5.72	Average
5459.300	34.18	8.73	34.18	40.28	49.01	54.00	4.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

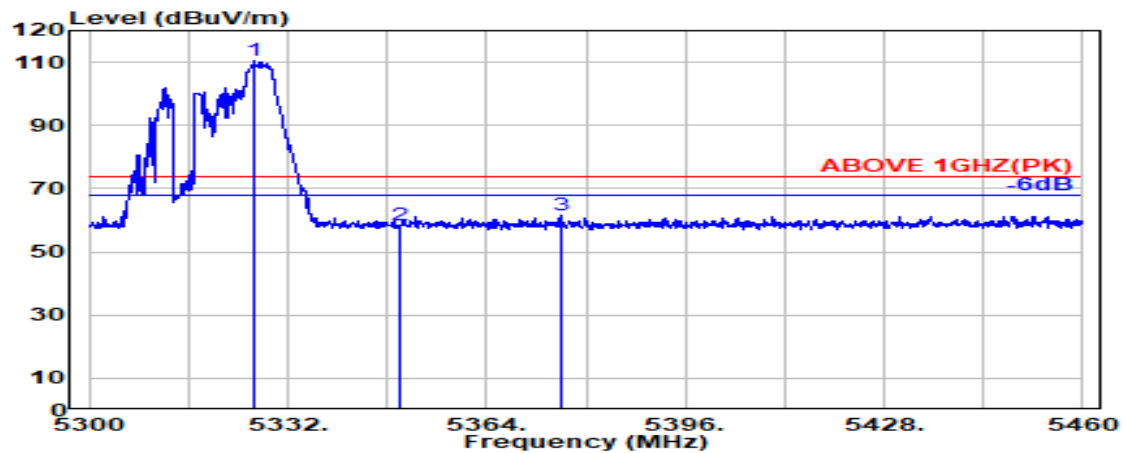

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	33.99	8.65	34.22	101.88	110.30	---	---	Peak
5350.000	33.90	8.67	34.22	50.00	58.34	74.00	15.66	Peak
5376.200	34.01	8.68	34.21	53.16	61.64	74.00	12.36	Peak

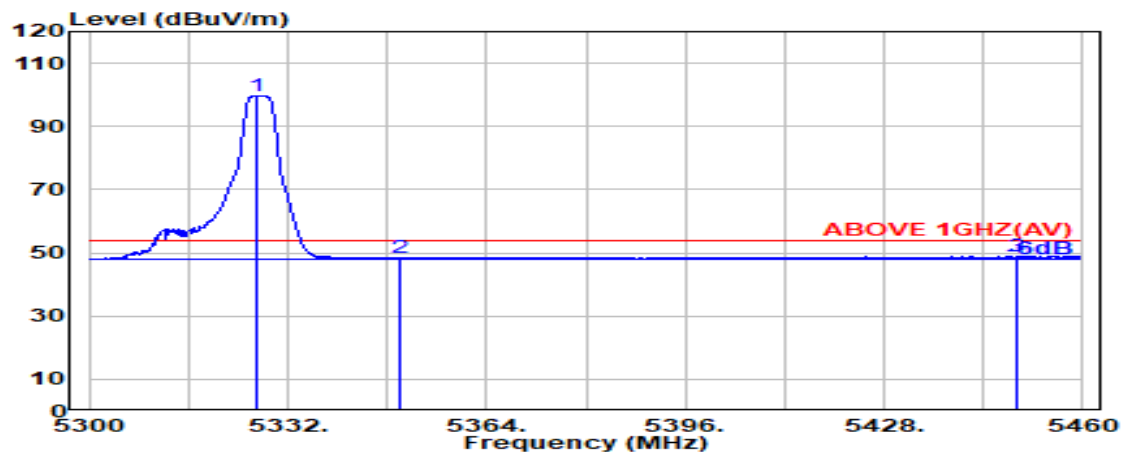

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.000	33.99	8.65	34.22	91.32	99.74	---	---	Average
5350.000	33.90	8.67	34.22	39.97	48.31	54.00	5.69	Average
5449.500	34.20	8.72	34.19	40.27	49.01	54.00	4.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

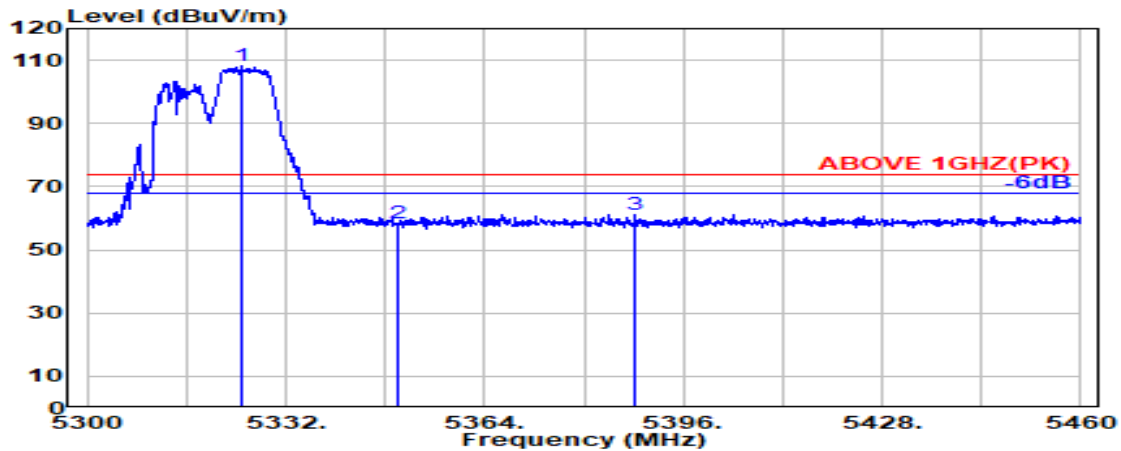

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.900	34.00	8.65	34.22	99.75	108.17	---	---	Peak
5350.000	33.90	8.67	34.22	50.20	58.55	74.00	15.45	Peak
5388.200	34.05	8.69	34.20	52.65	61.19	74.00	12.81	Peak

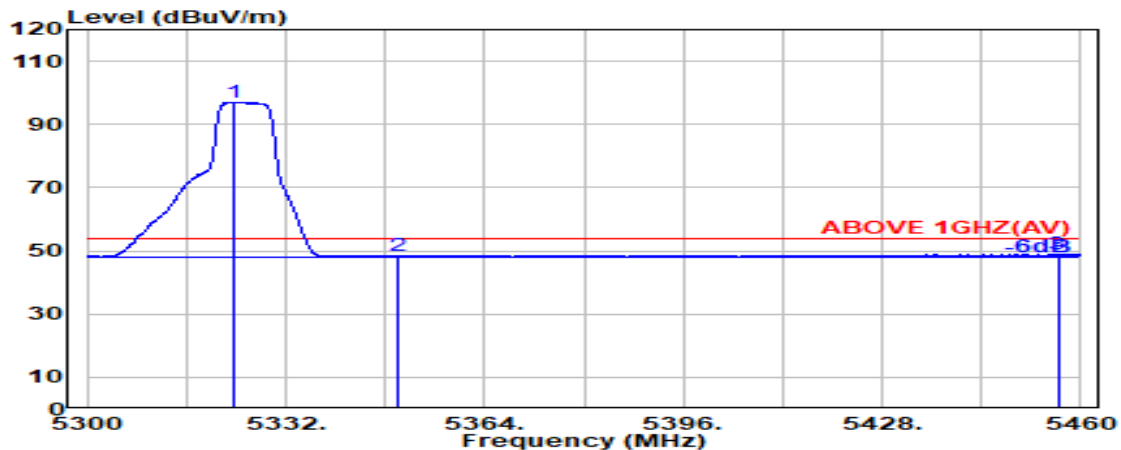

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.00	8.65	34.22	88.60	97.03	---	---	Average
5350.000	33.90	8.67	34.22	40.06	48.41	54.00	5.59	Average
5456.300	34.19	8.73	34.18	40.28	49.01	54.00	4.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

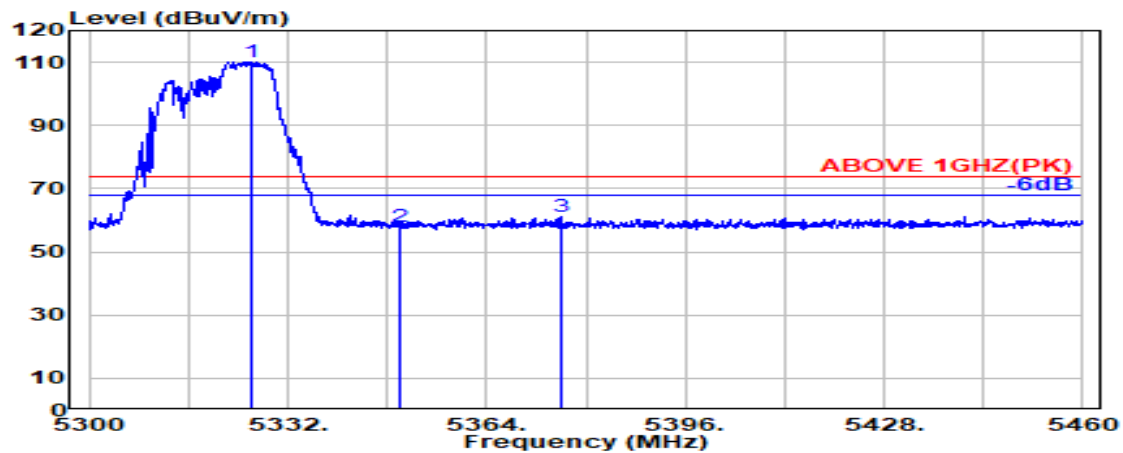

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	34.00	8.65	34.22	101.81	110.23	---	---	Peak
5350.000	33.90	8.67	34.22	49.81	58.16	74.00	15.84	Peak
5375.900	34.00	8.68	34.21	52.70	61.18	74.00	12.82	Peak

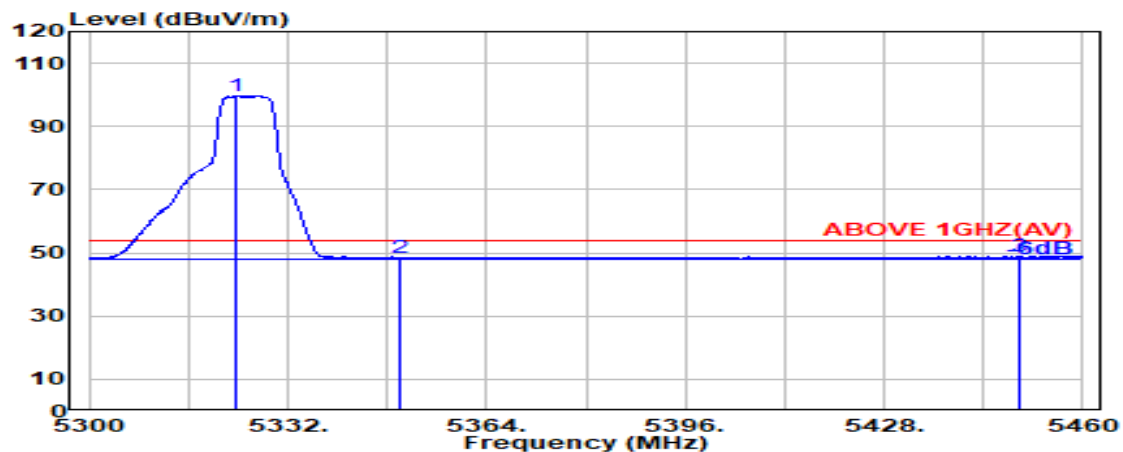

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	34.00	8.65	34.22	91.34	99.77	---	---	Average
5350.000	33.90	8.67	34.22	40.15	48.49	54.00	5.51	Average
5449.600	34.20	8.72	34.19	40.16	48.89	54.00	5.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

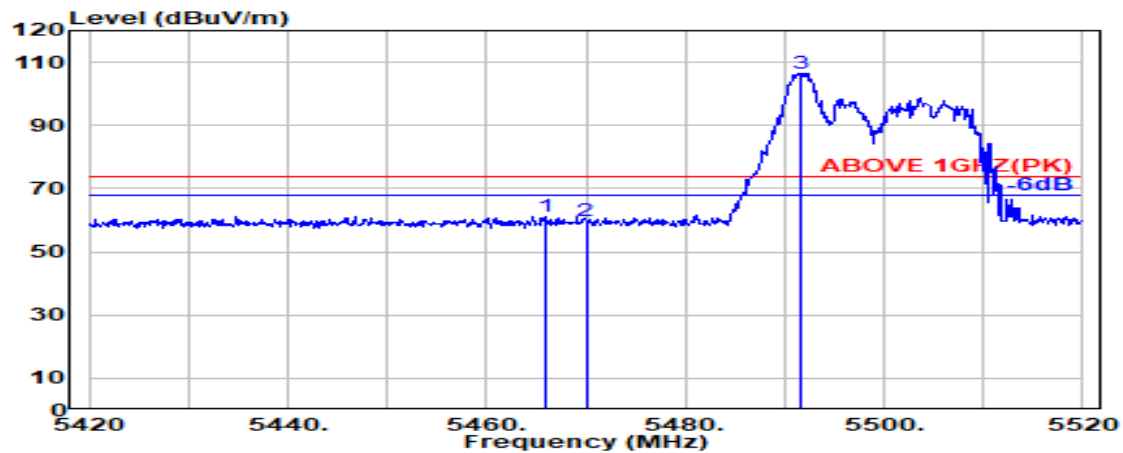

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.17	8.73	34.18	52.53	61.25	74.00	12.75	Peak
5470.000	34.16	8.74	34.18	51.19	59.91	74.00	14.09	Peak
@ 5491.600	34.12	8.75	34.17	97.84	106.53	---	---	Peak

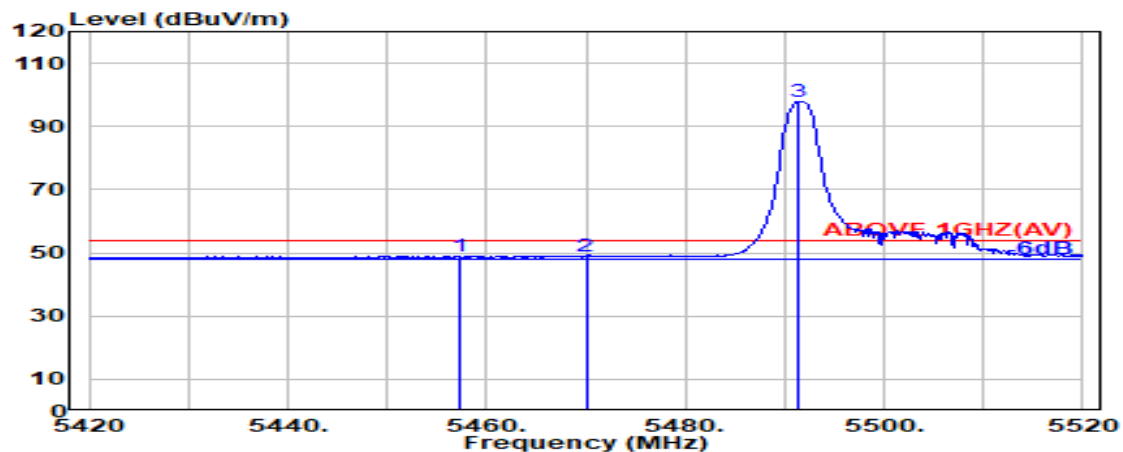

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.300	34.19	8.73	34.18	40.29	49.02	54.00	4.98	Average
5470.000	34.16	8.74	34.18	40.08	48.80	54.00	5.20	Average
@ 5491.400	34.12	8.75	34.17	89.33	98.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

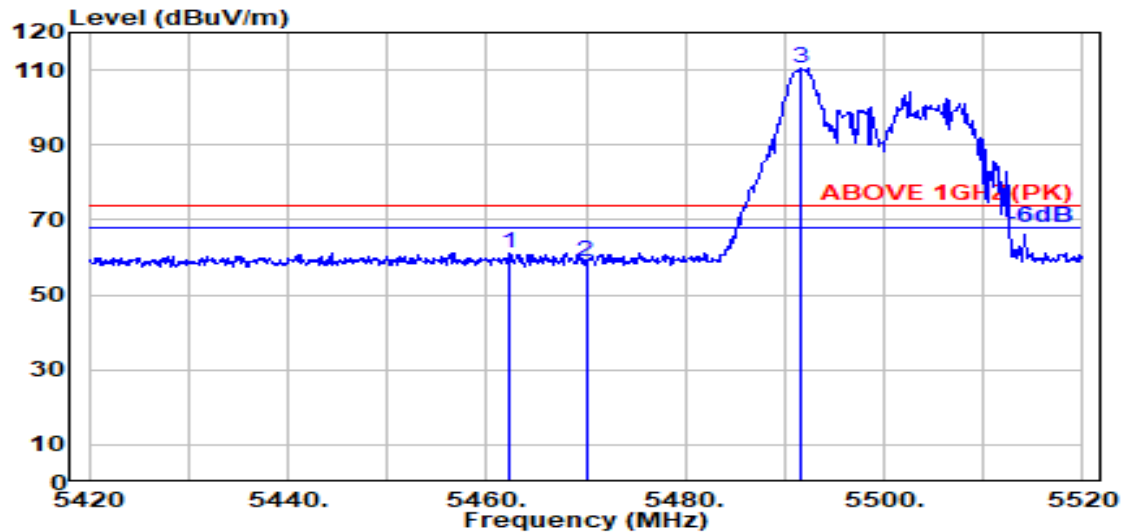

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.18	8.73	34.18	52.37	61.10	74.00	12.90	Peak
5470.000	34.16	8.74	34.18	50.05	58.77	74.00	15.23	Peak
@ 5491.600	34.12	8.75	34.17	101.75	110.44	---	---	Peak

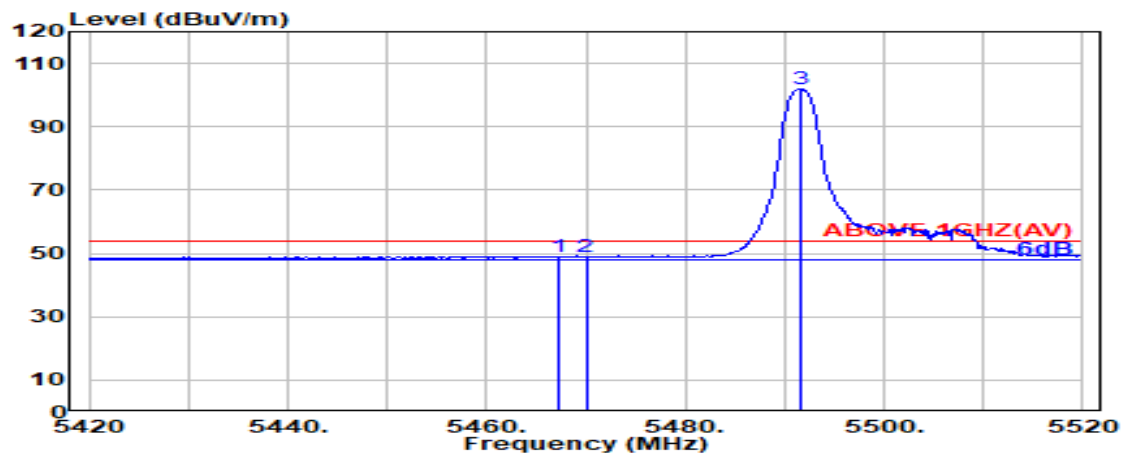

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.17	8.73	34.18	40.39	49.11	54.00	4.89	Average
5470.000	34.16	8.74	34.18	40.05	48.76	54.00	5.24	Average
@ 5491.600	34.12	8.75	34.17	93.21	101.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

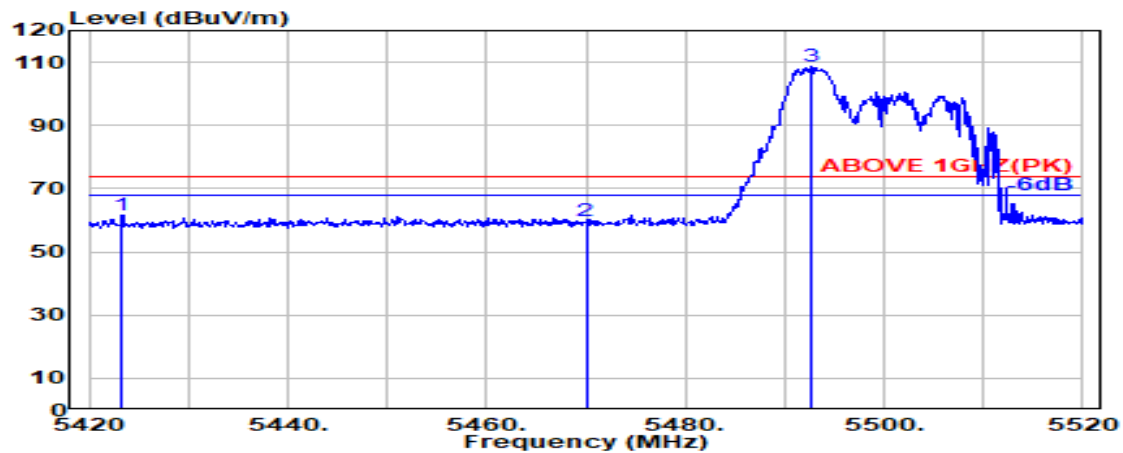

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.300	34.15	8.71	34.19	53.04	61.70	74.00	12.30	Peak
5470.000	34.16	8.74	34.18	51.26	59.98	74.00	14.02	Peak
@ 5492.600	34.11	8.75	34.17	99.77	108.46	---	---	Peak

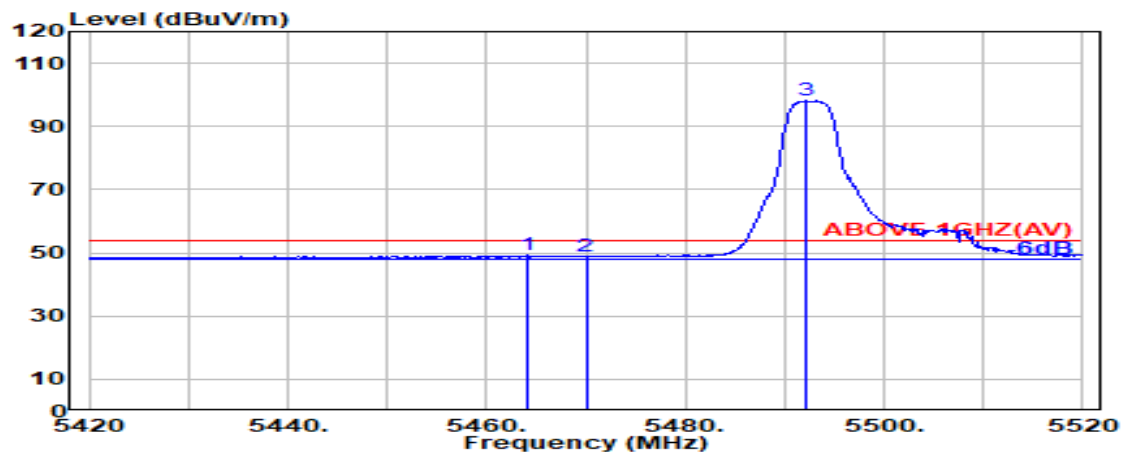

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.17	8.73	34.18	40.47	49.19	54.00	4.81	Average
5470.000	34.16	8.74	34.18	40.16	48.88	54.00	5.12	Average
@ 5492.100	34.12	8.75	34.17	89.36	98.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

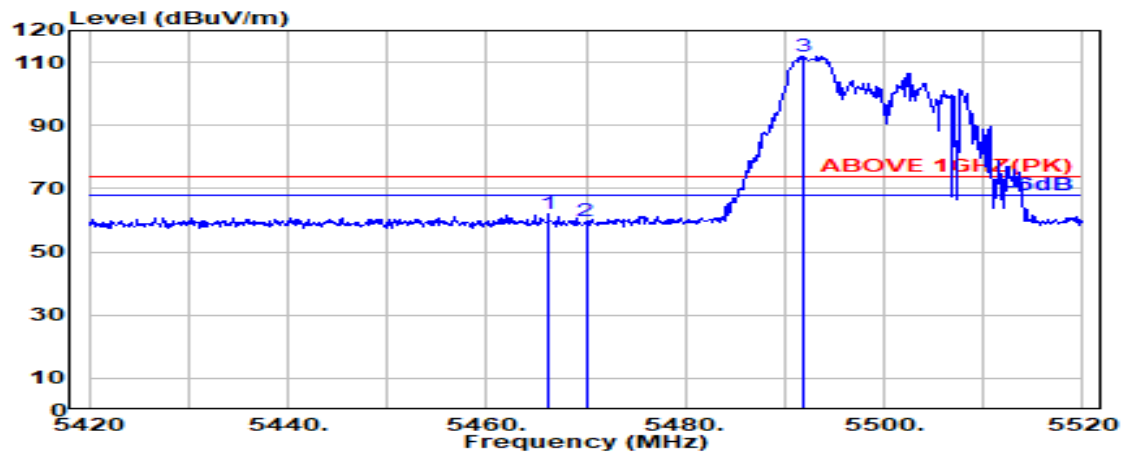

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	53.21	61.93	74.00	12.07	Peak
5470.000	34.16	8.74	34.18	51.14	59.86	74.00	14.14	Peak
@ 5492.000	34.12	8.75	34.17	103.25	111.94	---	---	Peak

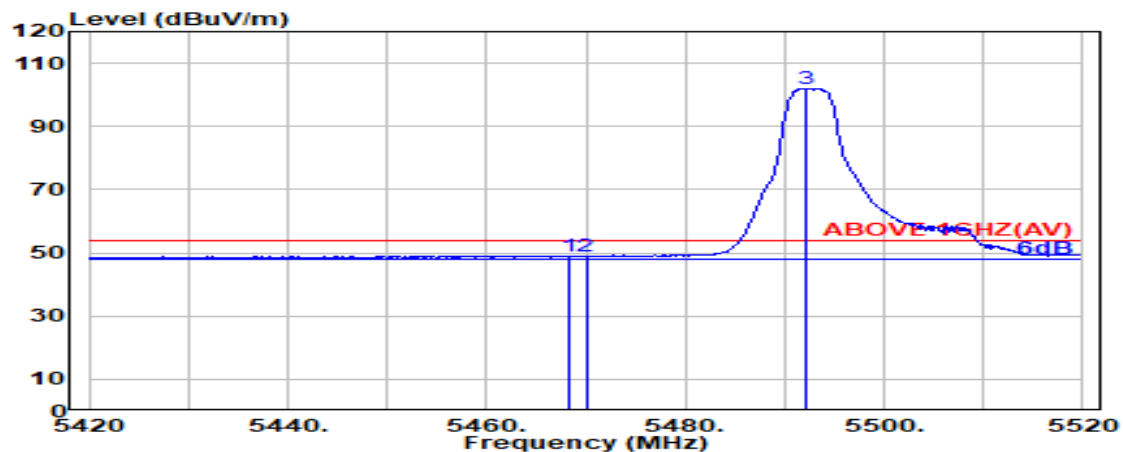

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.16	8.73	34.18	40.31	49.03	54.00	4.97	Average
5470.000	34.16	8.74	34.18	40.18	48.90	54.00	5.10	Average
@ 5492.200	34.12	8.75	34.17	93.26	101.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

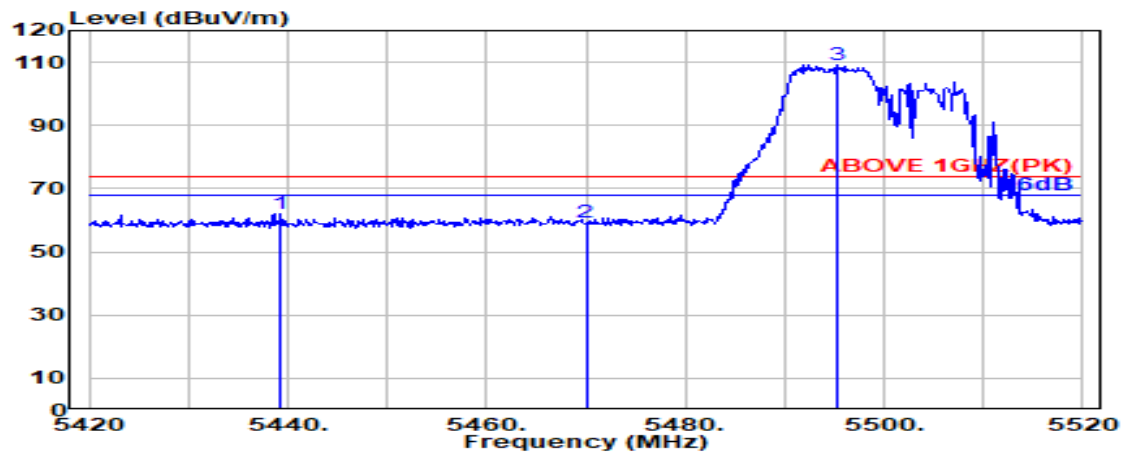

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.300	34.18	8.72	34.19	53.18	61.89	74.00	12.11	Peak
5470.000	34.16	8.74	34.18	50.50	59.22	74.00	14.78	Peak
@ 5495.300	34.11	8.75	34.17	100.66	109.35	---	---	Peak

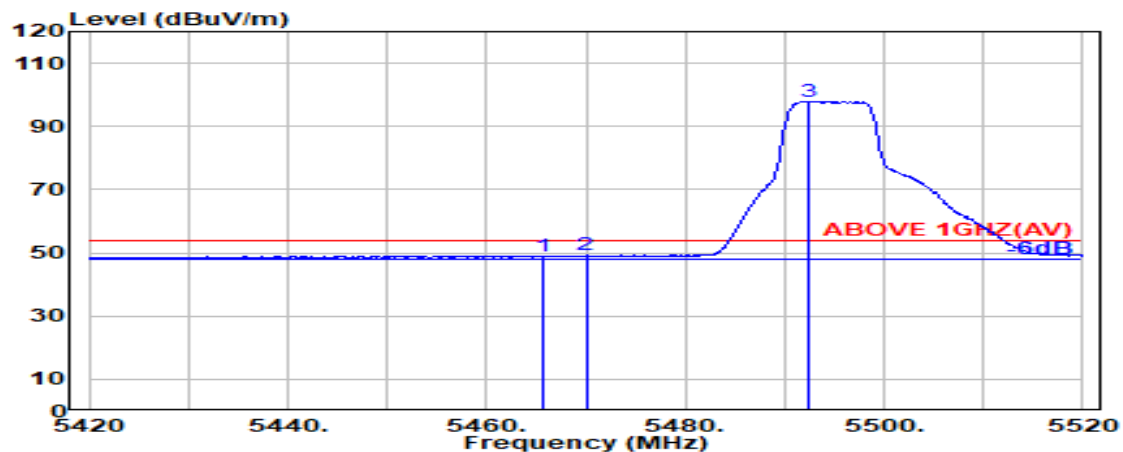

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.17	8.73	34.18	40.34	49.06	54.00	4.94	Average
5470.000	34.16	8.74	34.18	40.43	49.15	54.00	4.85	Average
@ 5492.500	34.11	8.75	34.17	89.23	97.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

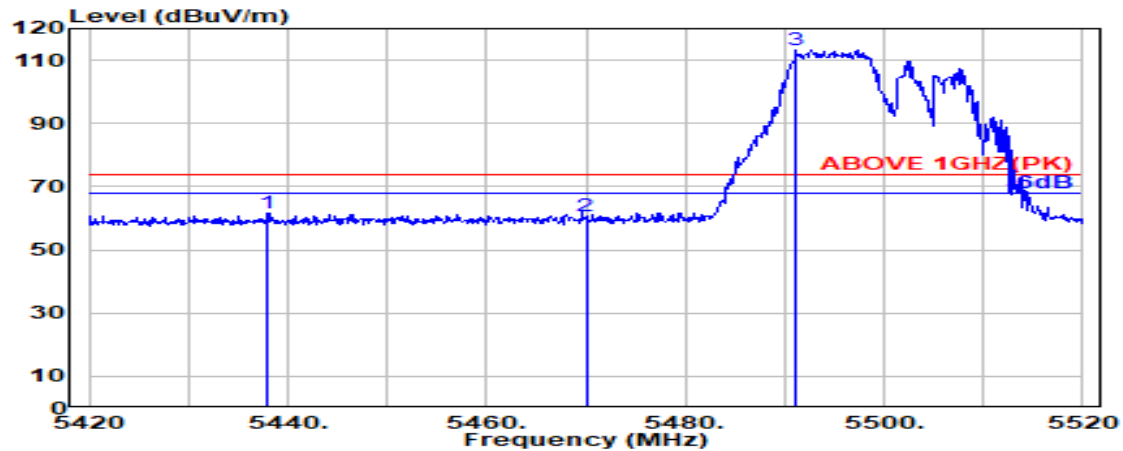

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.000	34.18	8.72	34.19	52.86	61.56	74.00	12.44	Peak
5470.000	34.16	8.74	34.18	51.87	60.59	74.00	13.41	Peak
@ 5491.100	34.12	8.75	34.17	104.48	113.18	---	---	Peak

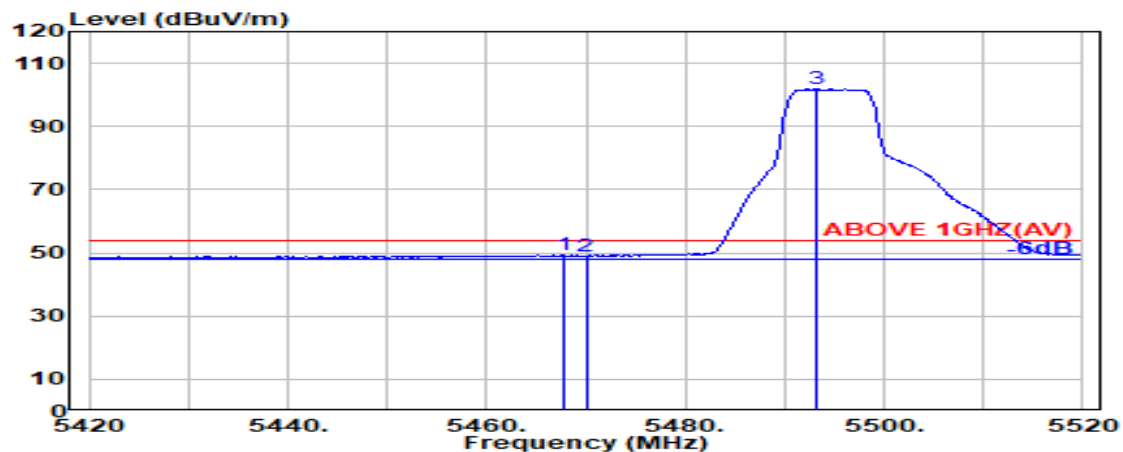

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.16	8.73	34.18	40.51	49.23	54.00	4.77	Average
5470.000	34.16	8.74	34.18	40.24	48.96	54.00	5.04	Average
@ 5493.300	34.11	8.75	34.17	93.03	101.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

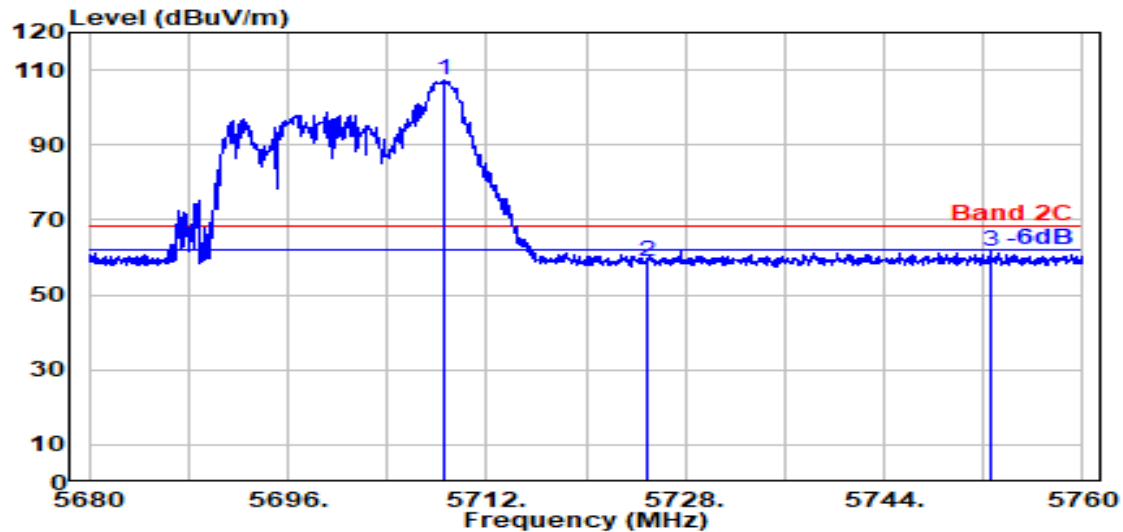

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.650	33.80	8.87	34.27	98.75	107.15	---	---	Peak
5725.000	33.80	8.88	34.28	50.47	58.88	68.20	9.32	Peak
5752.550	33.81	8.90	34.29	53.29	61.71	68.20	6.49	Peak

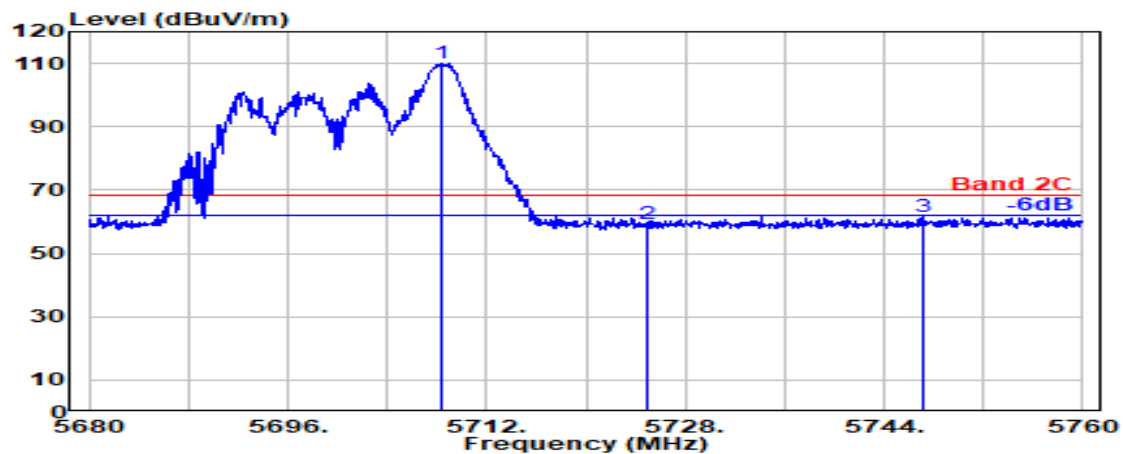

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.450	33.80	8.87	34.27	101.76	110.16	---	---	Peak
5725.000	33.80	8.88	34.28	50.75	59.16	68.20	9.04	Peak
5747.100	33.80	8.89	34.29	53.12	61.52	68.20	6.68	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

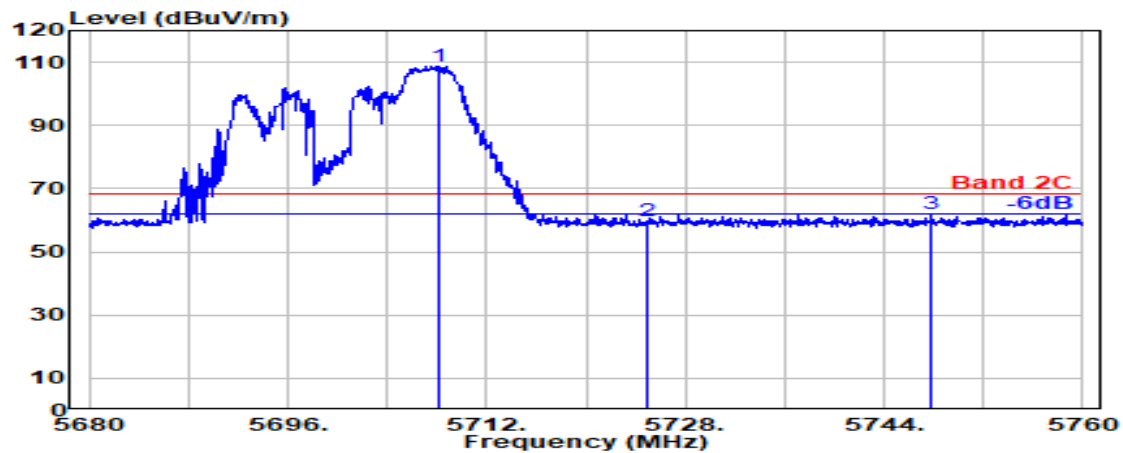

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.100	33.80	8.87	34.27	100.47	108.87	---	---	Peak
5725.000	33.80	8.88	34.28	51.34	59.75	68.20	8.45	Peak
5747.850	33.80	8.89	34.29	53.73	62.13	68.20	6.07	Peak

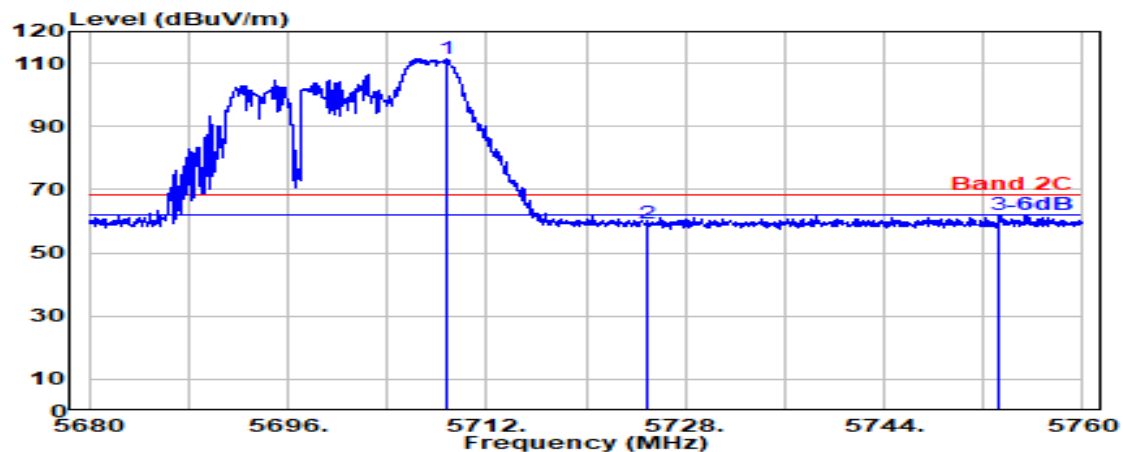

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.750	33.80	8.87	34.27	102.89	111.29	---	---	Peak
5725.000	33.80	8.88	34.28	50.94	59.35	68.20	8.85	Peak
5753.300	33.81	8.90	34.29	53.80	62.23	68.20	5.97	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

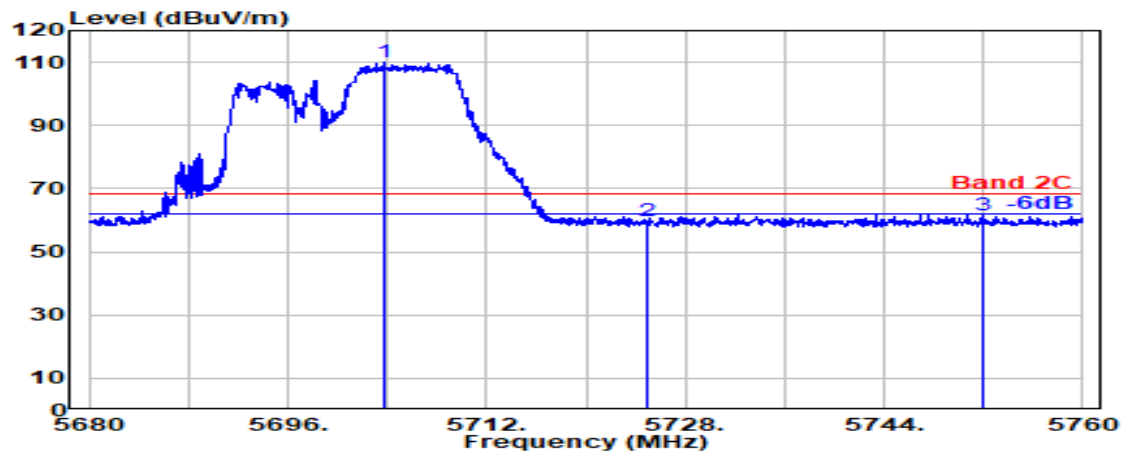

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.800	33.80	8.87	34.27	101.51	109.91	---	---	Peak
5725.000	33.80	8.88	34.28	51.26	59.67	68.20	8.53	Peak
5751.900	33.81	8.90	34.29	53.38	61.80	68.20	6.40	Peak

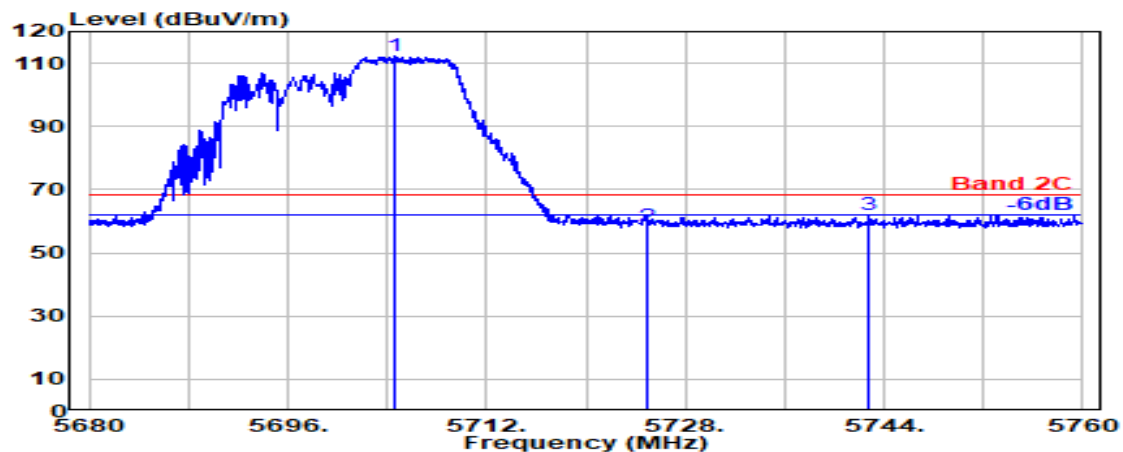

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.600	33.80	8.87	34.27	103.84	112.24	---	---	Peak
5725.000	33.80	8.88	34.28	49.98	58.38	68.20	9.82	Peak
5742.750	33.80	8.89	34.28	53.51	61.91	68.20	6.29	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

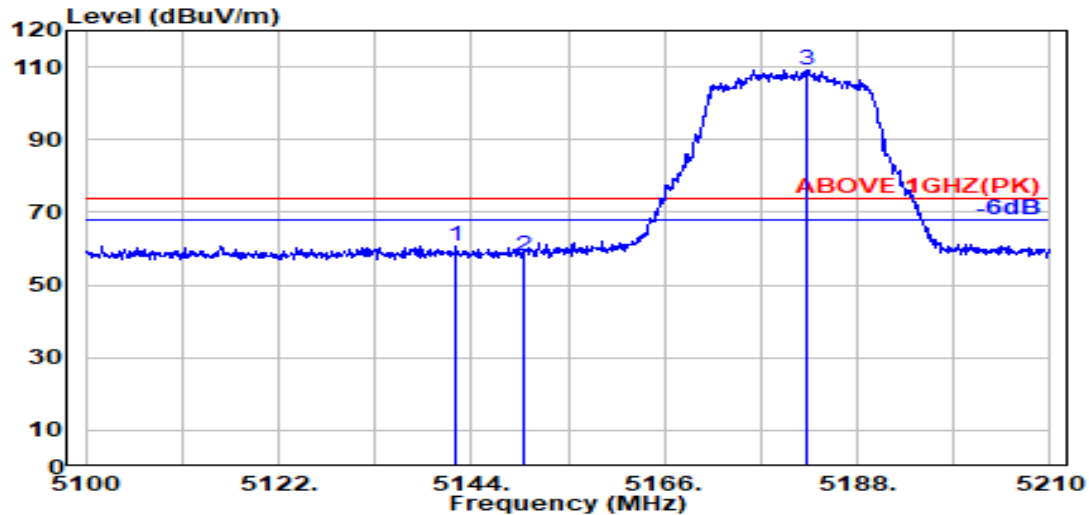

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	33.70	8.54	34.28	52.76	60.72	74.00	13.28	Peak
5150.000	33.70	8.54	34.28	49.90	57.86	74.00	16.14	Peak
@ 5182.200	33.70	8.56	34.27	101.11	109.10	---	---	Peak

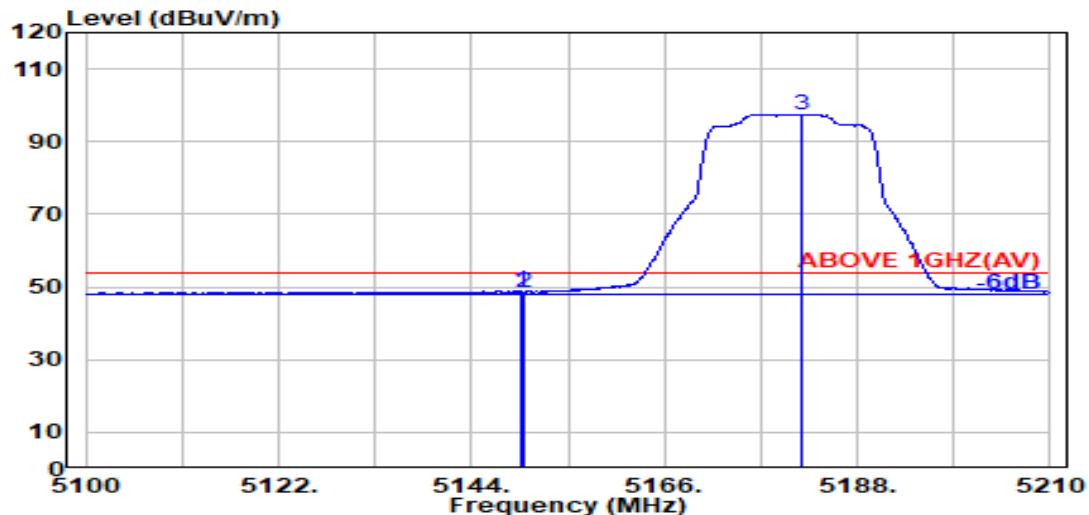

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.28	41.01	48.97	54.00	5.03	Average
5150.000	33.70	8.54	34.28	40.64	48.61	54.00	5.39	Average
@ 5181.700	33.70	8.56	34.27	89.58	97.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

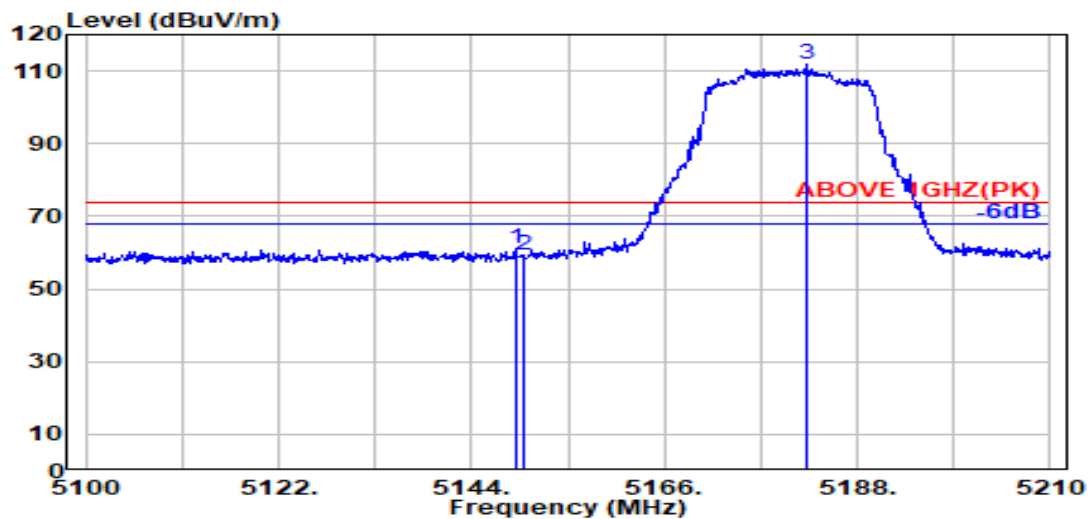

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.70	8.54	34.28	52.98	60.95	74.00	13.05	Peak
5150.000	33.70	8.54	34.28	51.20	59.16	74.00	14.84	Peak
@ 5182.300	33.70	8.56	34.27	103.77	111.77	---	---	Peak

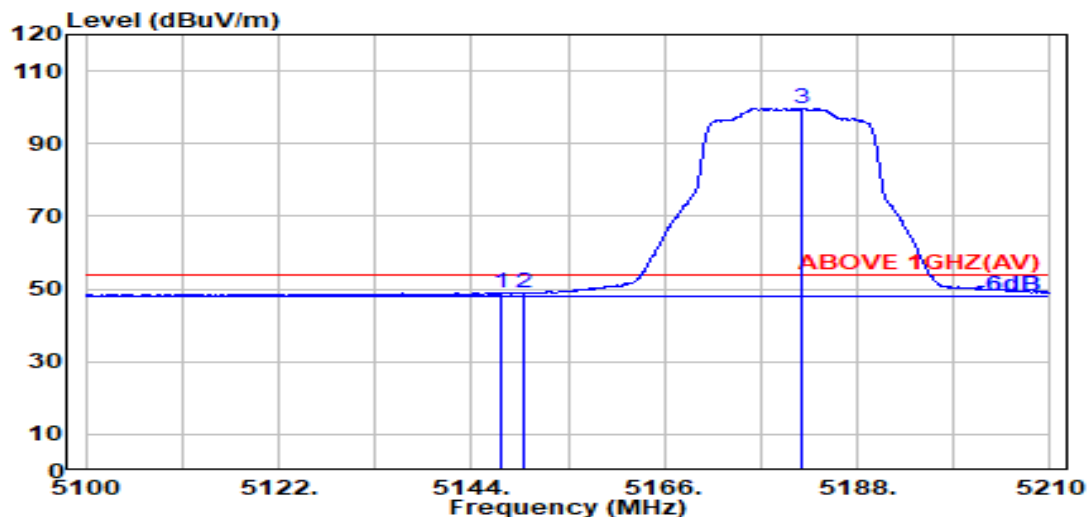

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.70	8.54	34.28	41.08	49.05	54.00	4.95	Average
5150.000	33.70	8.54	34.28	40.92	48.88	54.00	5.12	Average
@ 5181.700	33.70	8.56	34.27	91.63	99.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

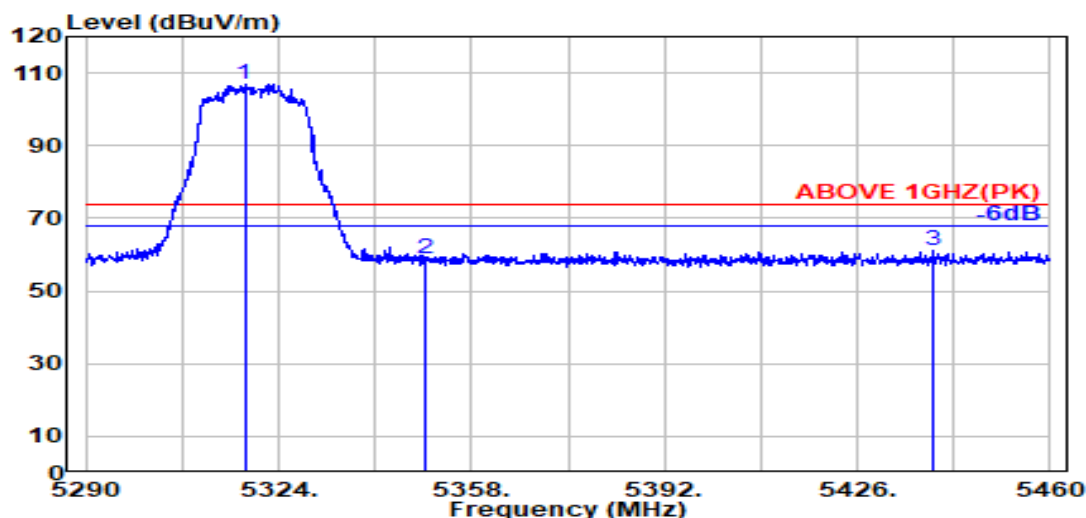

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.000	34.03	8.65	34.23	98.59	107.04	---	---	Peak
5350.000	33.90	8.67	34.22	50.70	59.05	74.00	14.95	Peak
5439.500	34.18	8.72	34.19	52.56	61.27	74.00	12.73	Peak

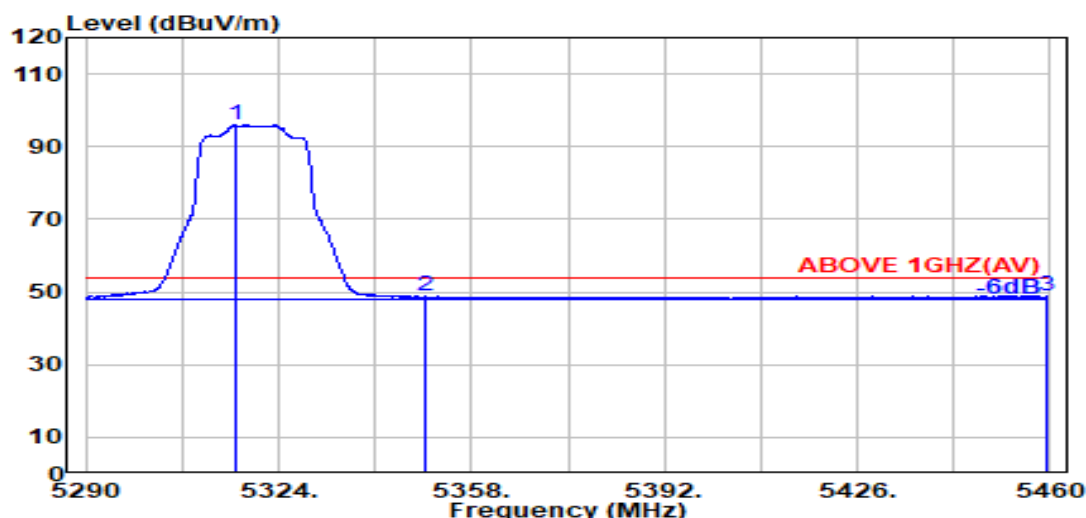

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.400	34.03	8.65	34.23	87.51	95.96	---	---	Average
5350.000	33.90	8.67	34.22	40.34	48.69	54.00	5.31	Average
5459.600	34.18	8.73	34.18	40.27	49.00	54.00	5.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

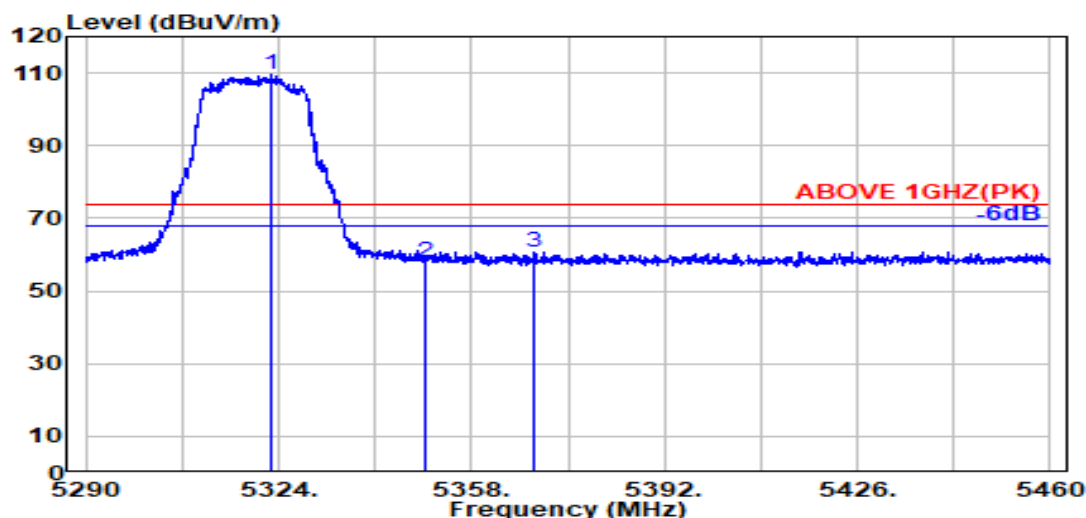

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.600	34.01	8.65	34.23	101.15	109.59	---	---	Peak
5350.000	33.90	8.67	34.22	49.59	57.94	74.00	16.06	Peak
5369.200	33.98	8.68	34.21	52.42	60.87	74.00	13.13	Peak

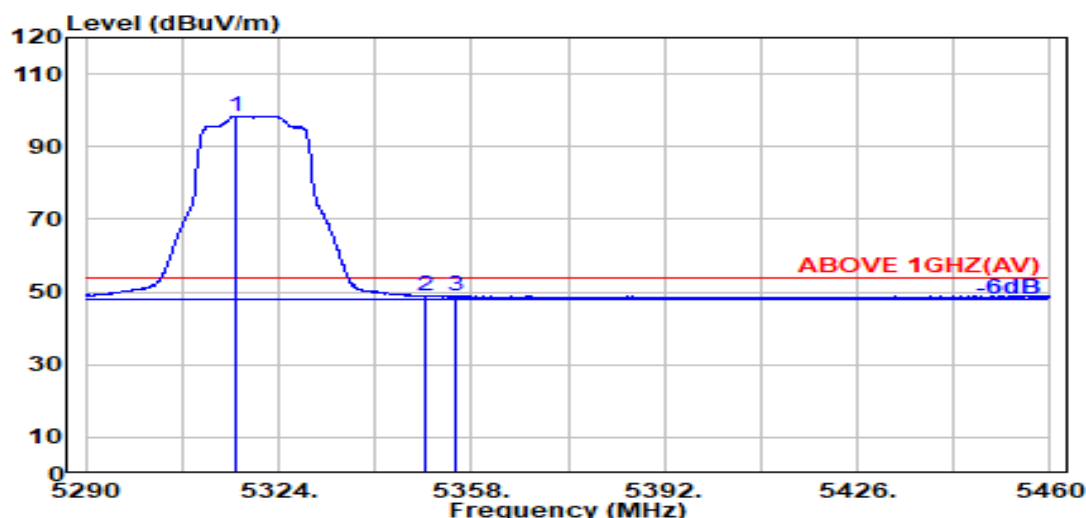

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.600	34.03	8.65	34.23	89.99	98.44	---	---	Average
5350.000	33.90	8.67	34.22	40.53	48.88	54.00	5.12	Average
5355.000	33.92	8.67	34.21	40.68	49.06	54.00	4.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

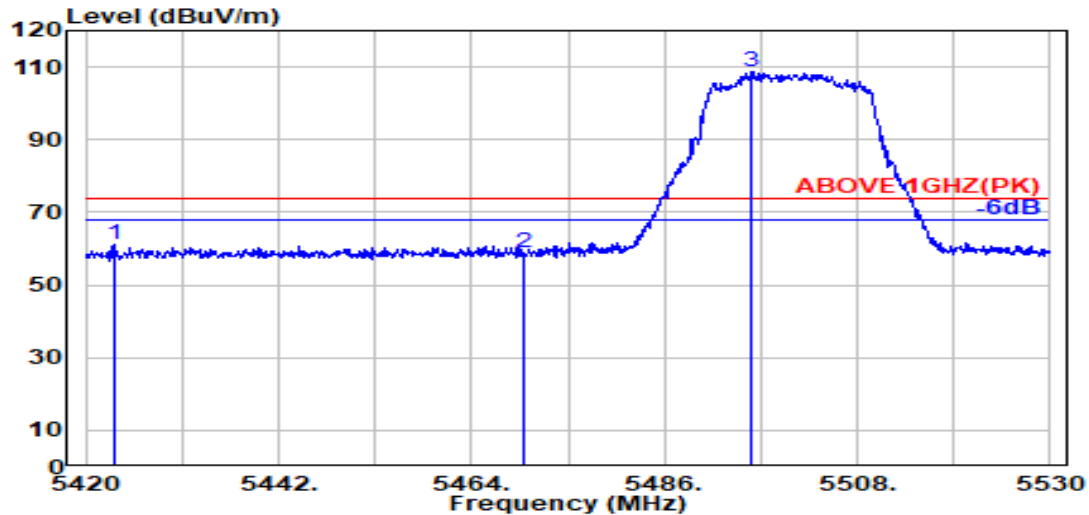

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.200	34.15	8.71	34.19	52.29	60.95	74.00	13.05	Peak
5470.000	34.16	8.74	34.18	50.26	58.98	74.00	15.02	Peak
@ 5495.900	34.11	8.75	34.17	100.12	108.80	---	---	Peak

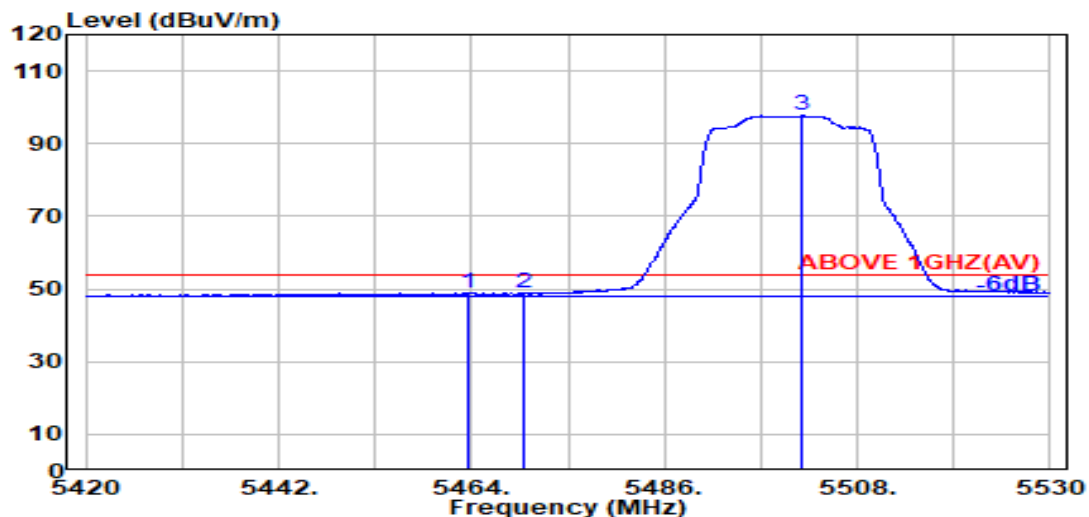

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.600	34.17	8.73	34.18	40.15	48.88	54.00	5.12	Average
5470.000	34.16	8.74	34.18	40.15	48.87	54.00	5.13	Average
@ 5501.700	34.10	8.75	34.17	89.06	97.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

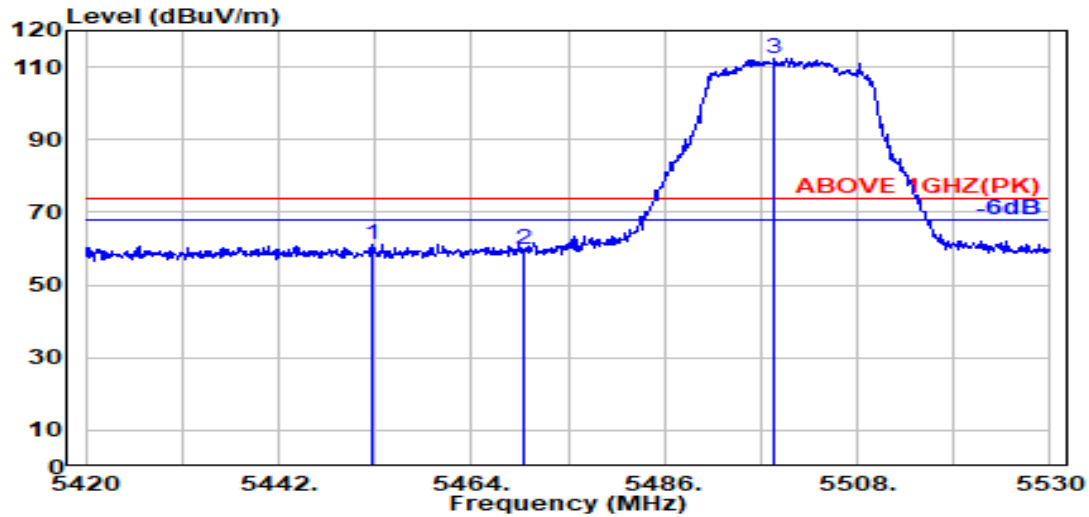

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.600	34.19	8.73	34.18	52.29	61.03	74.00	12.97	Peak
5470.000	34.16	8.74	34.18	50.83	59.55	74.00	14.45	Peak
@ 5498.600	34.10	8.75	34.17	103.51	112.19	---	---	Peak

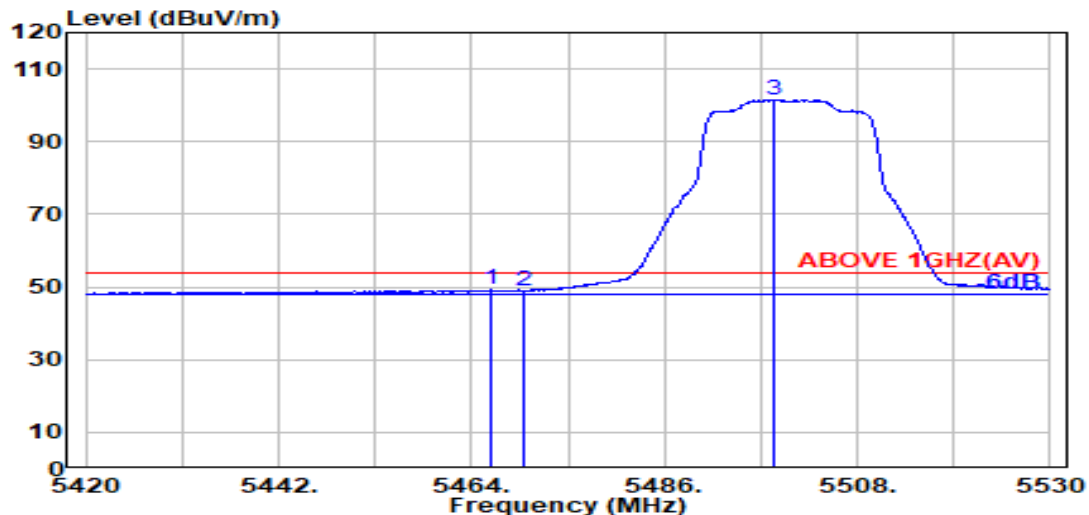

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	40.52	49.24	54.00	4.76	Average
5470.000	34.16	8.74	34.18	40.31	49.02	54.00	4.98	Average
@ 5498.600	34.10	8.75	34.17	92.73	101.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

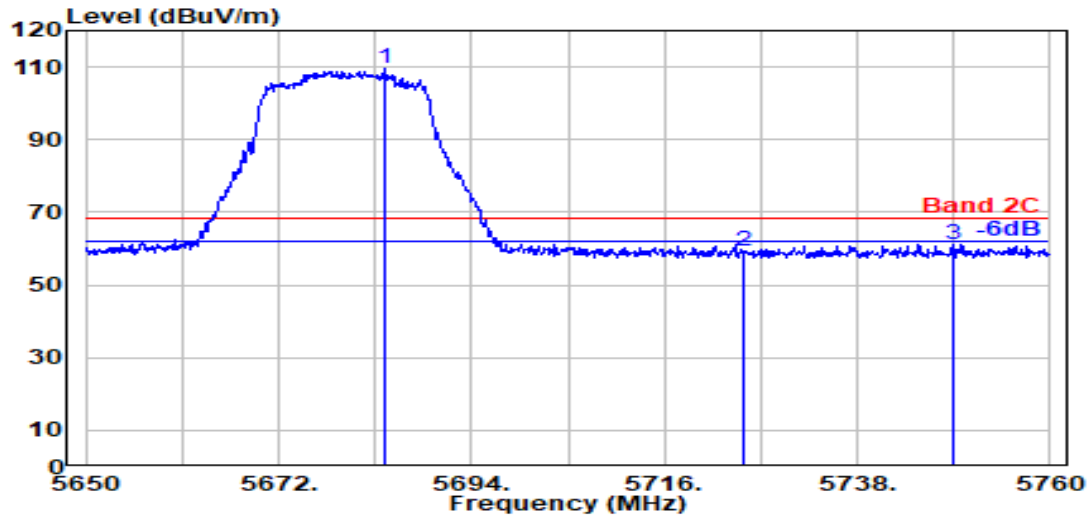

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5684.100	33.86	8.86	34.26	101.17	109.64	---	---	Peak
5725.000	33.80	8.88	34.28	50.71	59.11	68.20	9.09	Peak
5748.900	33.80	8.89	34.29	52.67	61.08	68.20	7.12	Peak

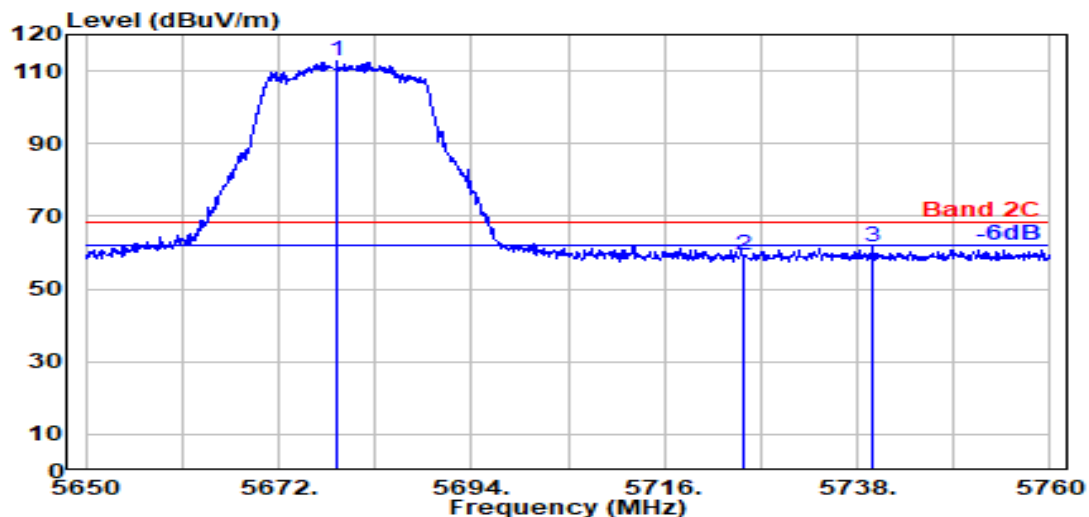

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.600	33.89	8.85	34.25	104.11	112.60	---	---	Peak
5725.000	33.80	8.88	34.28	50.79	59.19	68.20	9.01	Peak
5739.600	33.80	8.89	34.28	53.27	61.68	68.20	6.52	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

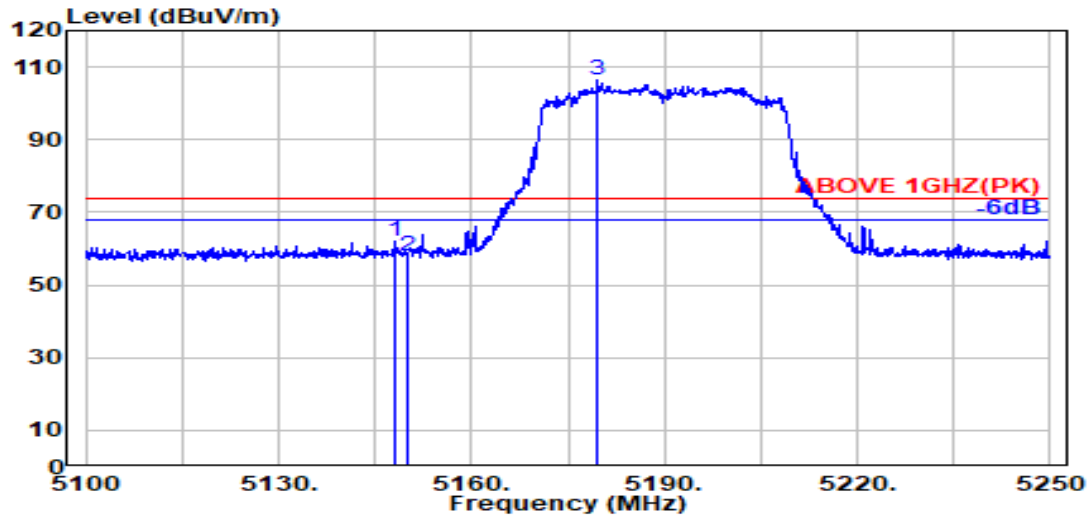

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.70	8.54	34.28	54.16	62.13	74.00	11.87	Peak
5150.000	33.70	8.54	34.28	49.96	57.92	74.00	16.08	Peak
@ 5179.500	33.70	8.56	34.27	98.61	106.60	---	---	Peak

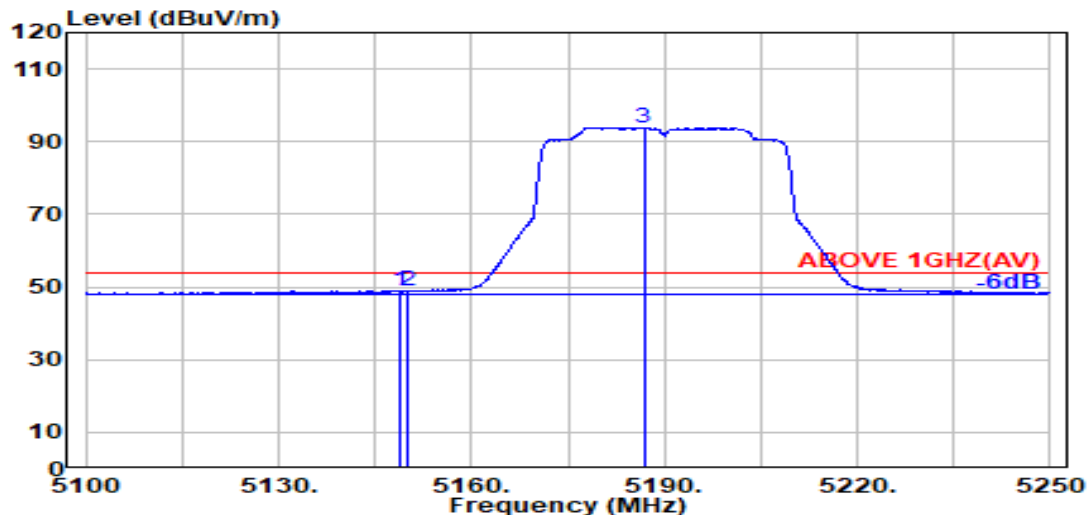

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.70	8.54	34.28	41.07	49.04	54.00	4.96	Average
5150.000	33.70	8.54	34.28	40.94	48.90	54.00	5.10	Average
@ 5186.800	33.70	8.57	34.27	85.86	93.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

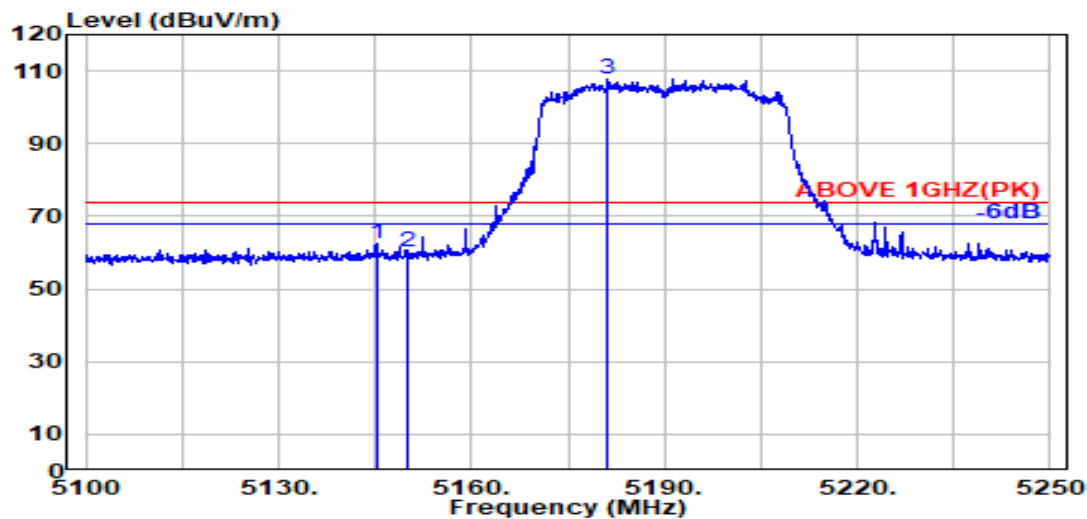

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	33.70	8.54	34.28	54.42	62.38	74.00	11.62	Peak
5150.000	33.70	8.54	34.28	52.06	60.02	74.00	13.98	Peak
@ 5181.100	33.70	8.56	34.27	99.88	107.88	---	---	Peak

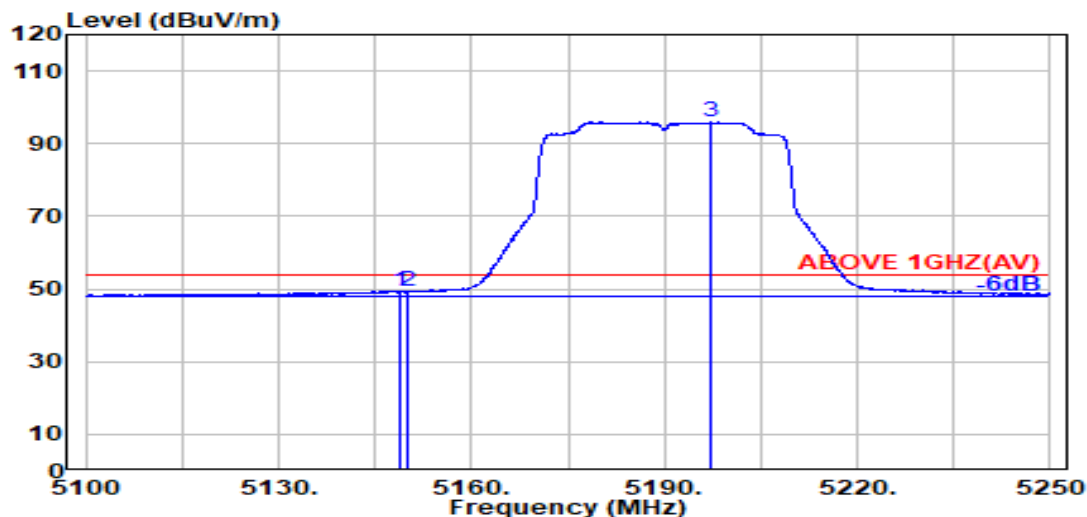

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.54	34.28	41.43	49.39	54.00	4.61	Average
5150.000	33.70	8.54	34.28	41.36	49.32	54.00	4.68	Average
@ 5197.300	33.70	8.57	34.27	88.01	96.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

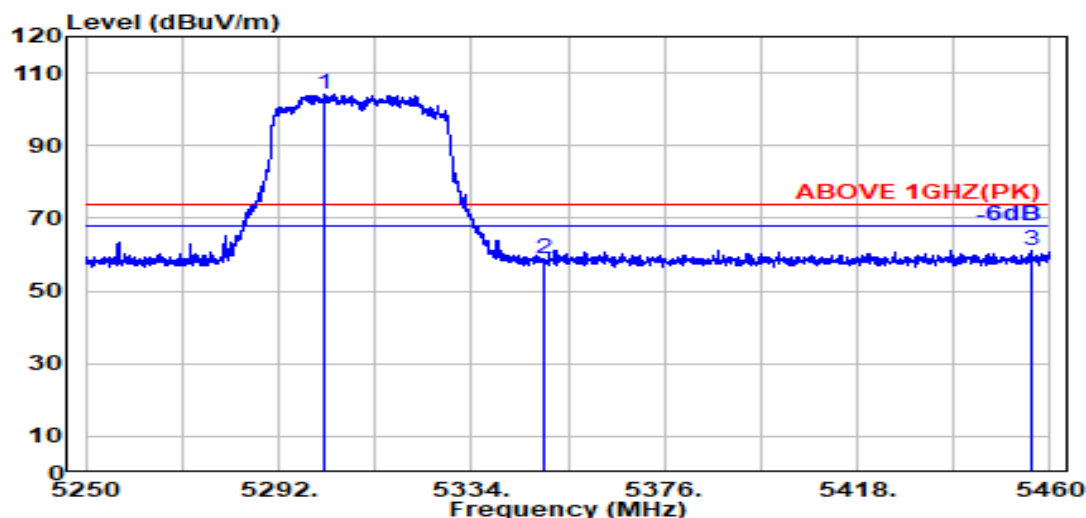

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.000	34.09	8.64	34.23	95.66	104.15	---	---	Peak
5350.000	33.90	8.67	34.22	50.61	58.96	74.00	15.04	Peak
5455.700	34.19	8.73	34.18	52.40	61.13	74.00	12.87	Peak

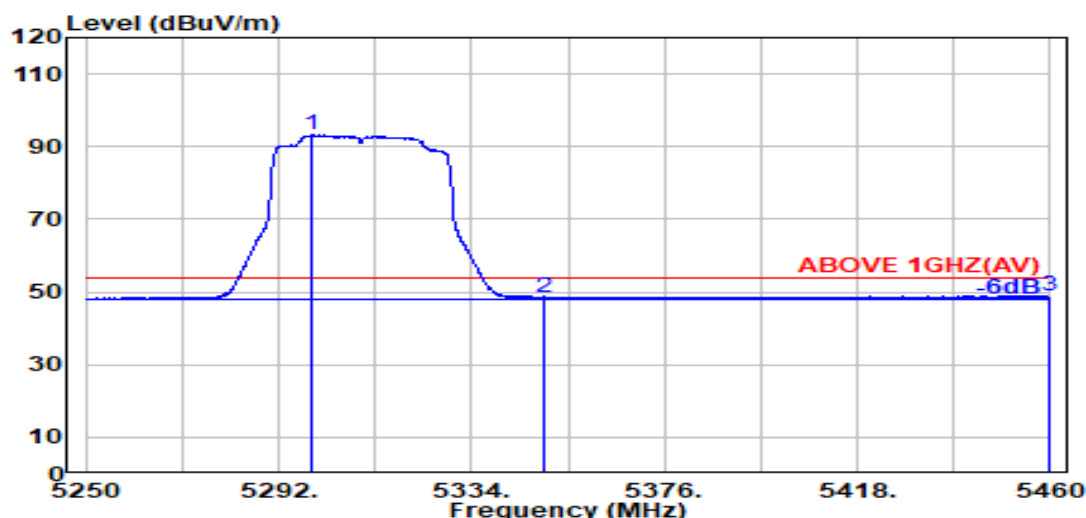

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.000	34.09	8.63	34.23	84.68	93.18	---	---	Average
5350.000	33.90	8.67	34.22	40.08	48.43	54.00	5.57	Average
5459.900	34.18	8.73	34.18	40.25	48.97	54.00	5.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

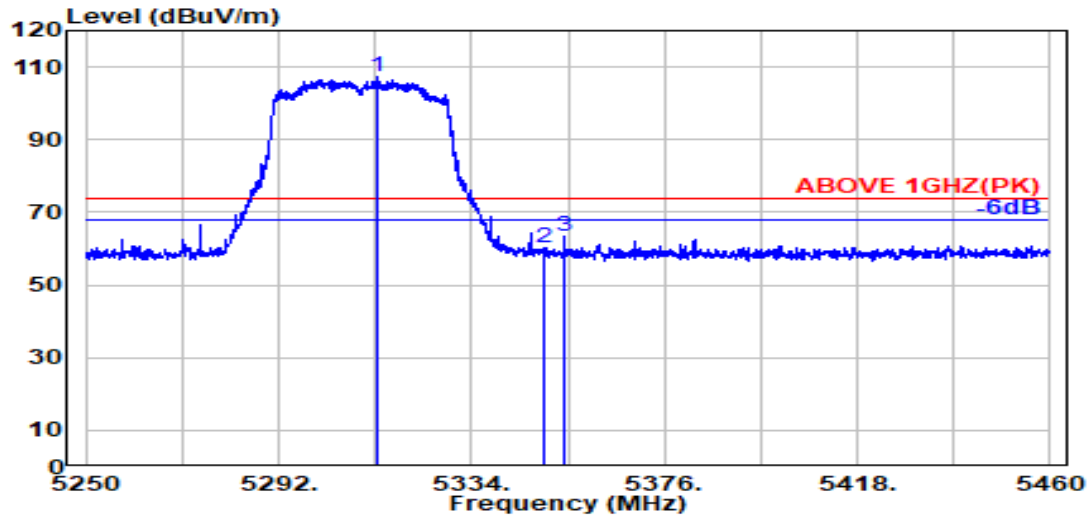

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.300	34.05	8.64	34.23	98.77	107.24	---	---	Peak
5350.000	33.90	8.67	34.22	52.01	60.36	74.00	13.64	Peak
5354.100	33.92	8.67	34.22	54.94	63.31	74.00	10.69	Peak

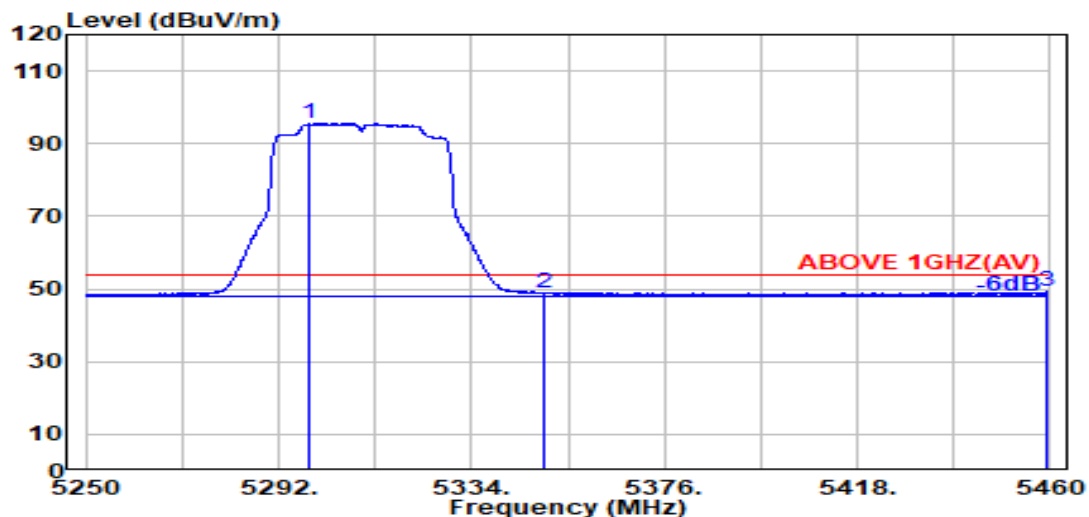

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.700	34.09	8.63	34.23	87.22	95.72	---	---	Average
5350.000	33.90	8.67	34.22	40.52	48.87	54.00	5.13	Average
5459.100	34.18	8.73	34.18	40.41	49.14	54.00	4.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

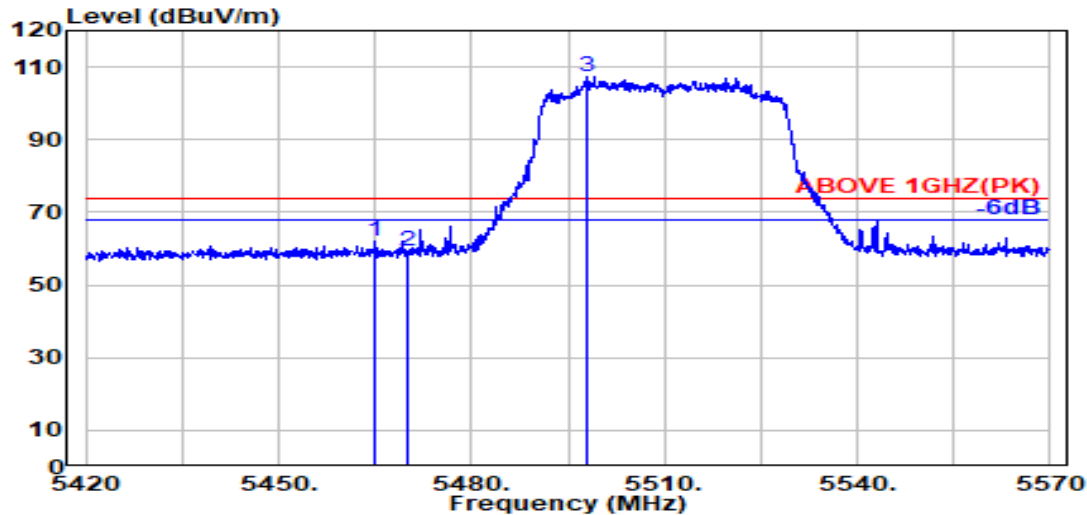

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.17	8.73	34.18	53.53	62.25	74.00	11.75	Peak
5470.000	34.16	8.74	34.18	50.67	59.39	74.00	14.61	Peak
@ 5498.100	34.10	8.75	34.17	98.67	107.36	---	---	Peak

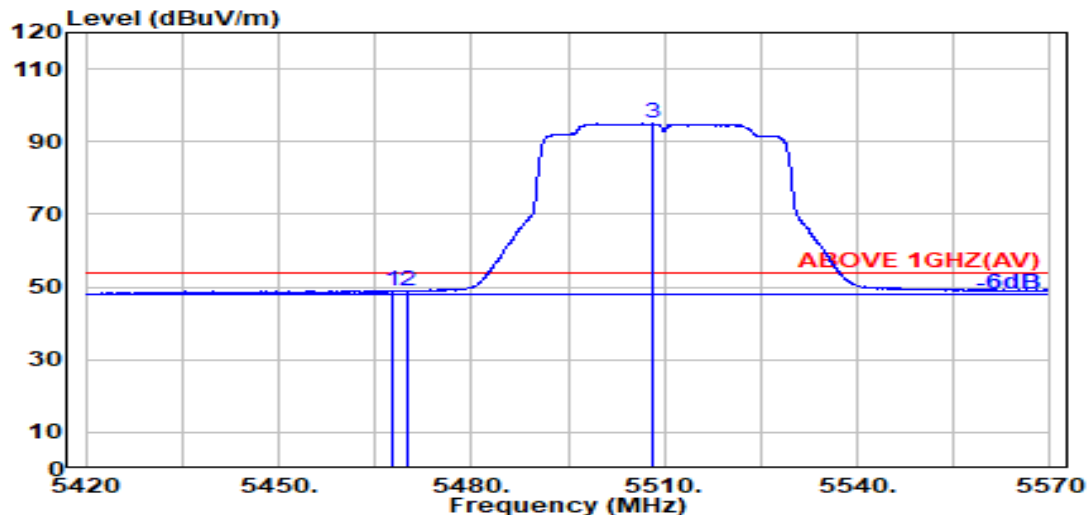

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.16	8.73	34.18	40.28	49.00	54.00	5.00	Average
5470.000	34.16	8.74	34.18	40.31	49.02	54.00	4.98	Average
@ 5508.200	34.10	8.76	34.17	86.24	94.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

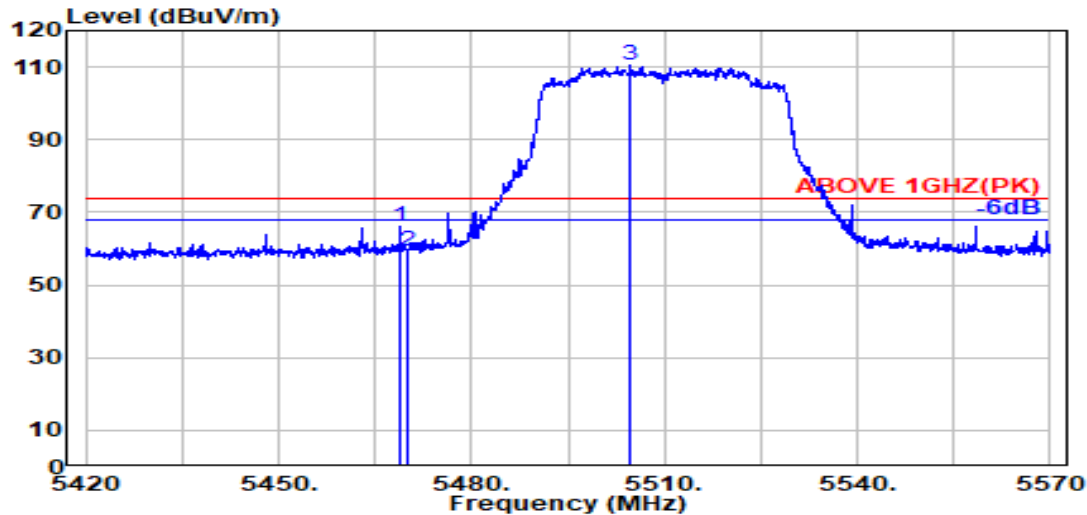

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	57.38	66.10	74.00	7.90	Peak
5470.000	34.16	8.74	34.18	50.82	59.54	74.00	14.46	Peak
@ 5504.700	34.10	8.76	34.17	101.80	110.48	---	---	Peak

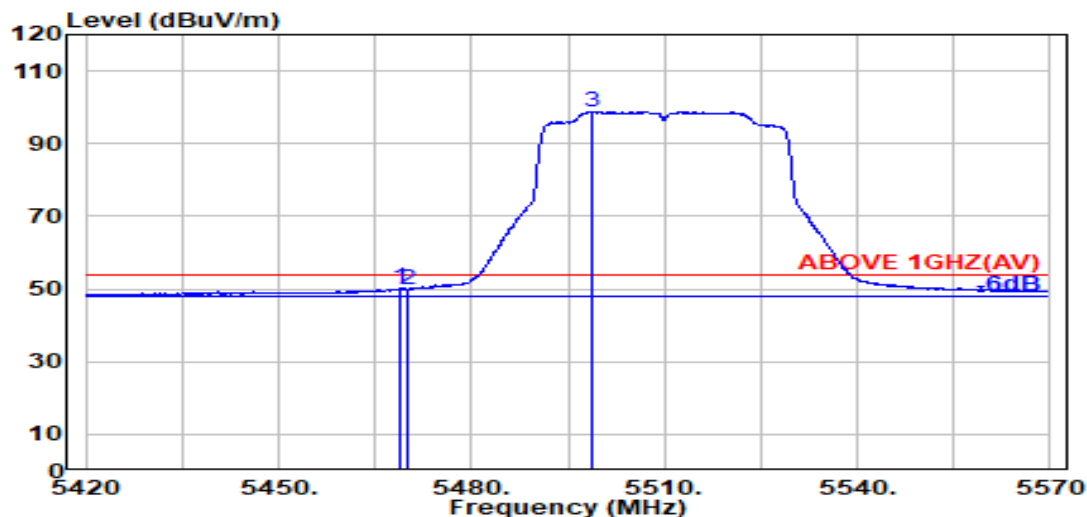

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	41.41	50.12	54.00	3.88	Average
5470.000	34.16	8.74	34.18	41.21	49.93	54.00	4.07	Average
@ 5498.700	34.10	8.75	34.17	90.21	98.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

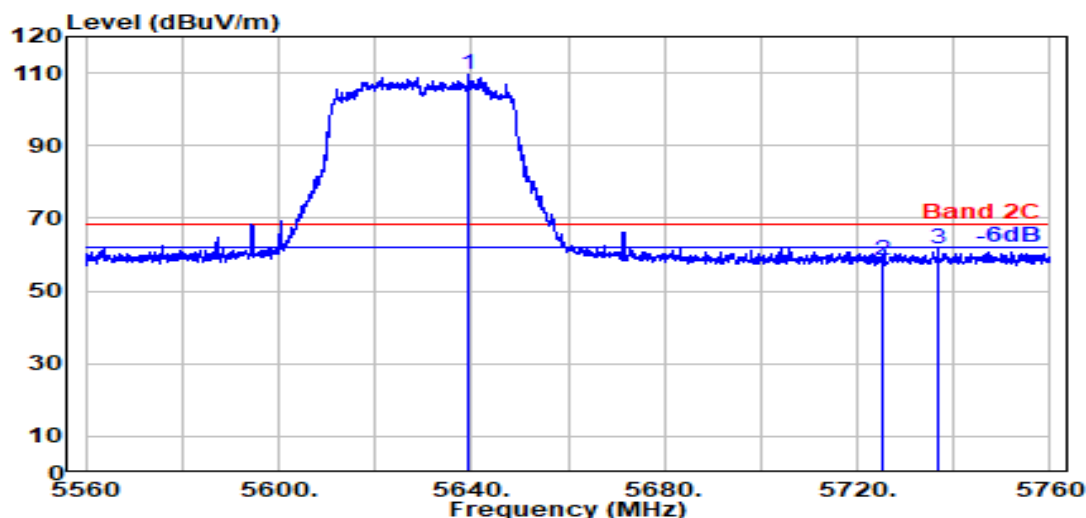

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5639.300	34.00	8.83	34.24	101.15	109.74	---	---	Peak
5725.000	33.80	8.88	34.28	50.17	58.57	68.20	9.63	Peak
5736.800	33.80	8.89	34.28	53.00	61.41	68.20	6.79	Peak

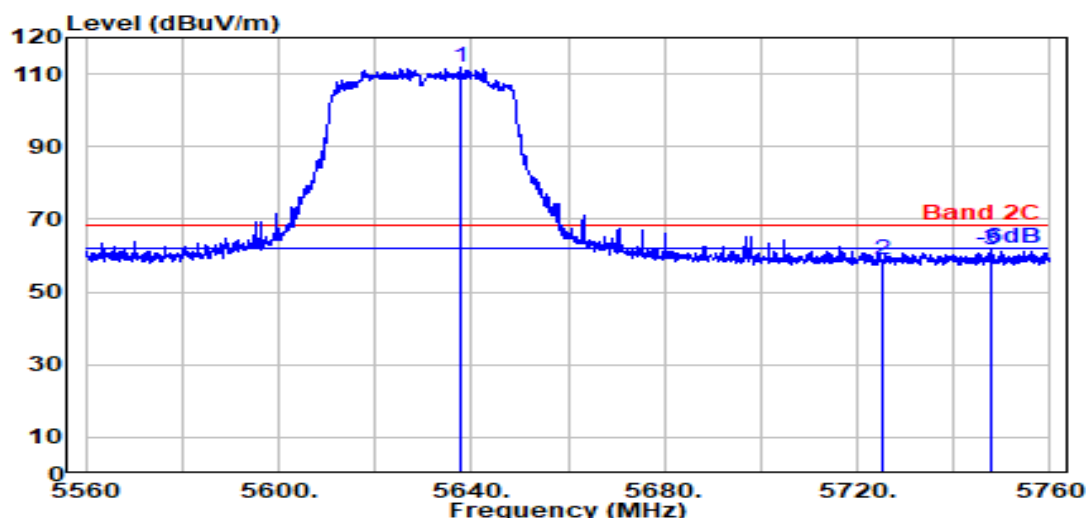

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5637.800	34.00	8.83	34.24	103.07	111.67	---	---	Peak
5725.000	33.80	8.88	34.28	50.31	58.71	68.20	9.49	Peak
5747.700	33.80	8.89	34.29	52.95	61.36	68.20	6.84	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

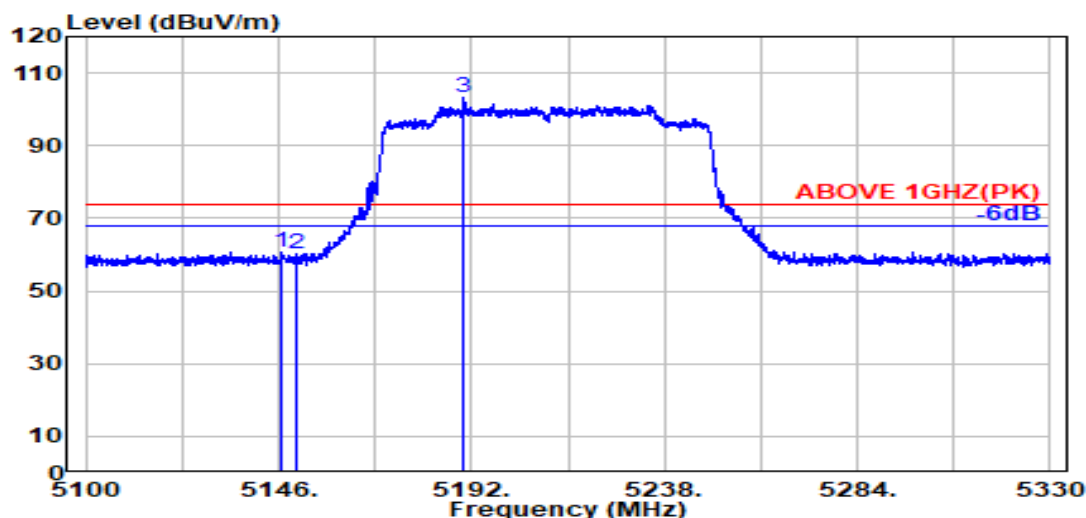

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	33.70	8.54	34.28	52.86	60.82	74.00	13.18	Peak
5150.000	33.70	8.54	34.28	52.25	60.21	74.00	13.79	Peak
@ 5190.100	33.70	8.57	34.27	95.06	103.06	---	---	Peak

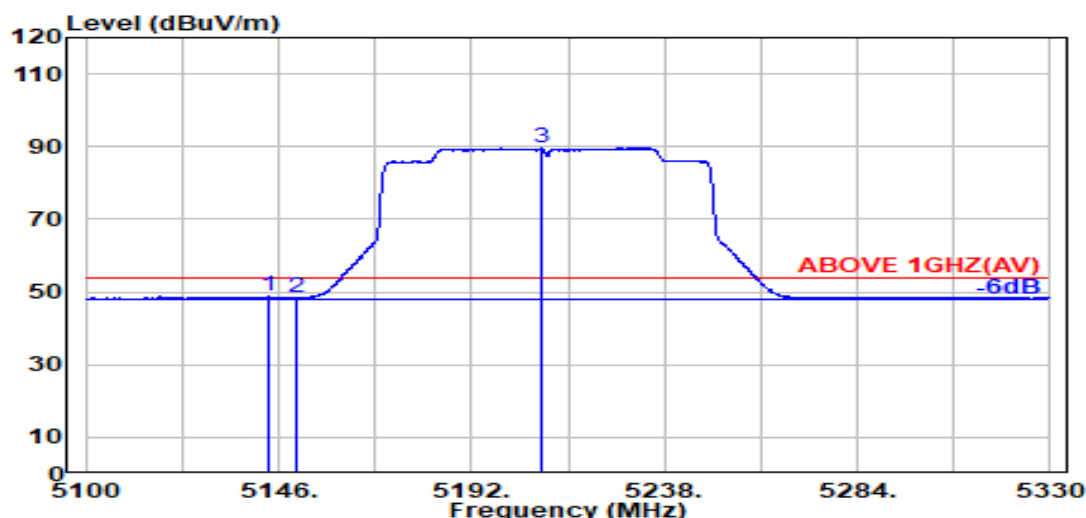

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5143.900	33.70	8.54	34.28	40.80	48.75	54.00	5.25	Average
5150.000	33.70	8.54	34.28	40.43	48.40	54.00	5.60	Average
5208.500	33.72	8.58	34.26	81.60	89.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

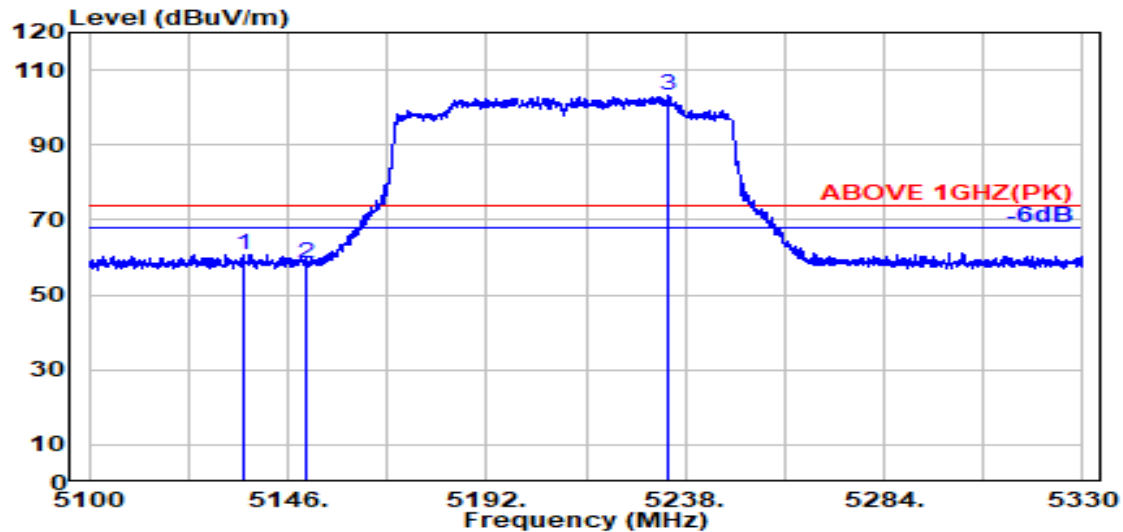

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.800	33.70	8.54	34.29	52.83	60.78	74.00	13.22	Peak
5150.000	33.70	8.54	34.28	50.46	58.43	74.00	15.57	Peak
@ 5234.200	33.77	8.60	34.25	95.14	103.25	---	---	Peak

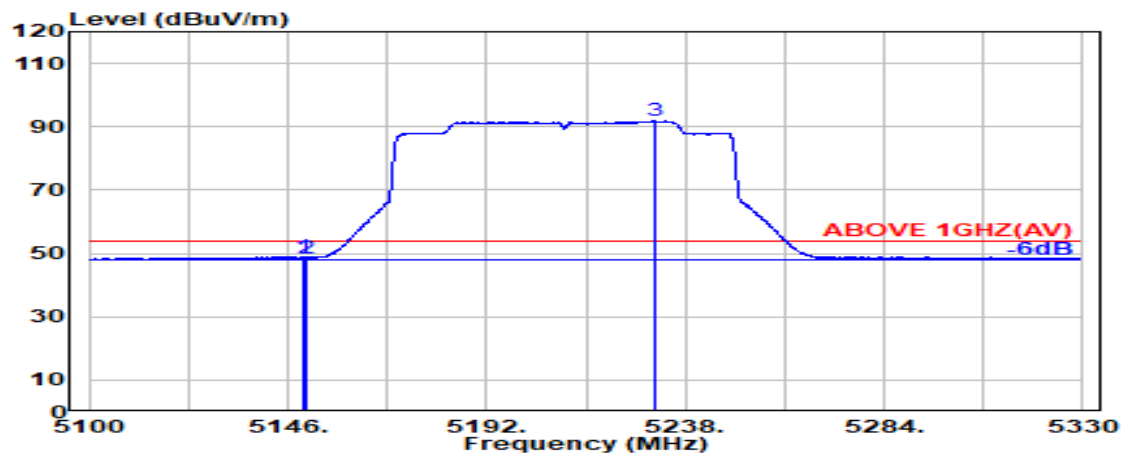

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5149.700	33.70	8.54	34.28	41.09	49.05	54.00	4.95	Average
5150.000	33.70	8.54	34.28	40.71	48.67	54.00	5.33	Average
5230.800	33.76	8.59	34.25	83.73	91.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

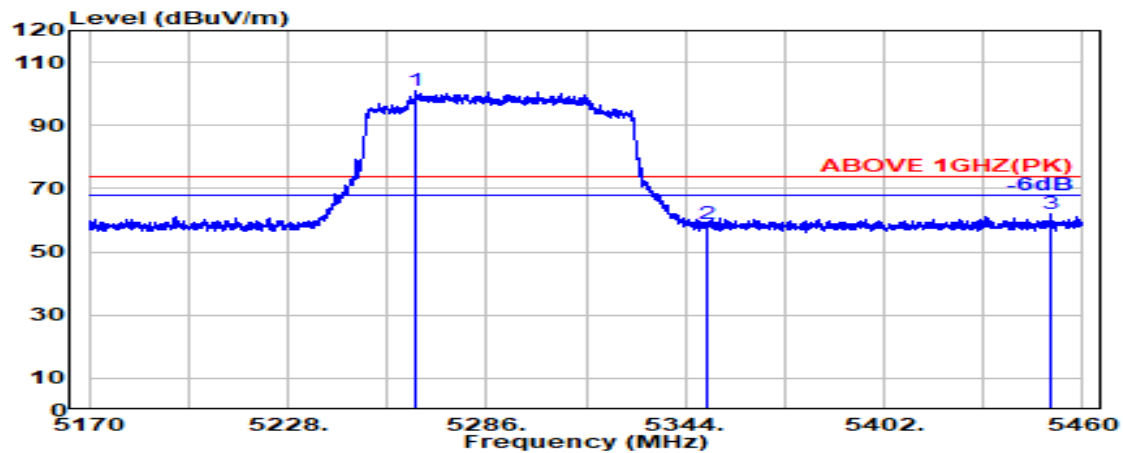

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5265.500	33.89	8.61	34.24	92.79	101.06	---	---	Peak
5350.000	33.90	8.67	34.22	50.60	58.95	74.00	15.05	Peak
@ 5450.600	34.20	8.72	34.19	53.22	61.96	74.00	12.04	Peak

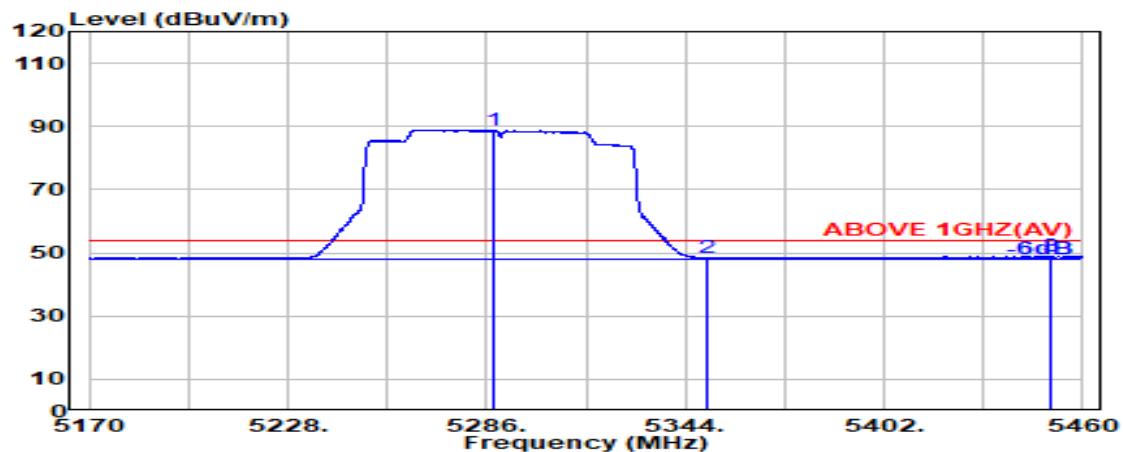

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5288.400	34.03	8.63	34.24	80.54	88.96	---	---	Average
5350.000	33.90	8.67	34.22	40.03	48.38	54.00	5.62	Average
5450.600	34.20	8.72	34.19	40.23	48.97	54.00	5.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

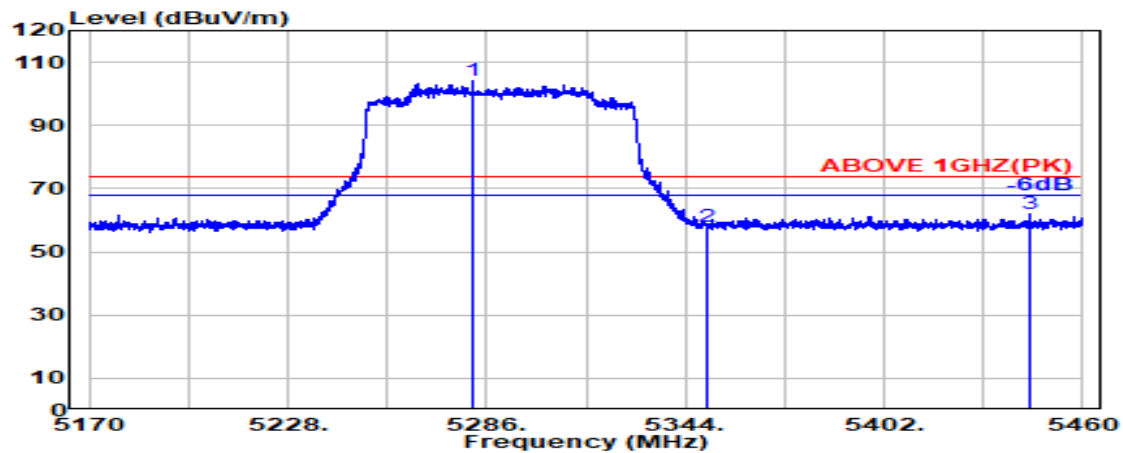

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5281.800	33.99	8.62	34.24	95.68	104.06	---	---	Peak
5350.000	33.90	8.67	34.22	49.49	57.83	74.00	16.17	Peak
@ 5444.400	34.19	8.72	34.19	53.28	62.01	74.00	11.99	Peak

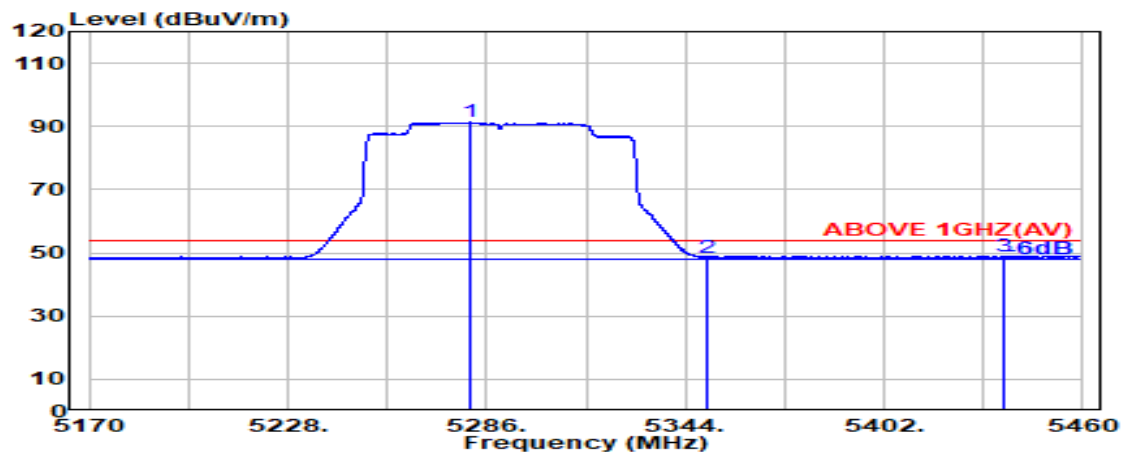

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.000	33.99	8.62	34.24	82.92	91.29	---	---	Average
5350.000	33.90	8.67	34.22	40.31	48.66	54.00	5.34	Average
5437.300	34.17	8.72	34.19	40.31	49.01	54.00	4.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

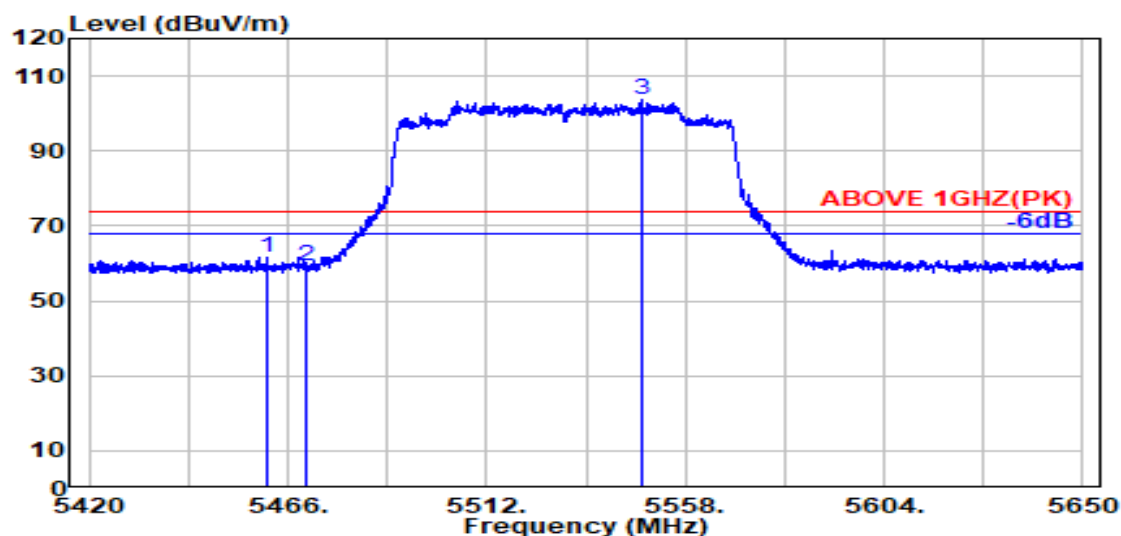

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.200	34.18	8.73	34.18	53.05	61.78	74.00	12.22	Peak
5470.000	34.16	8.74	34.18	50.52	59.24	74.00	14.76	Peak
@ 5547.900	34.10	8.78	34.19	94.93	103.61	---	---	Peak

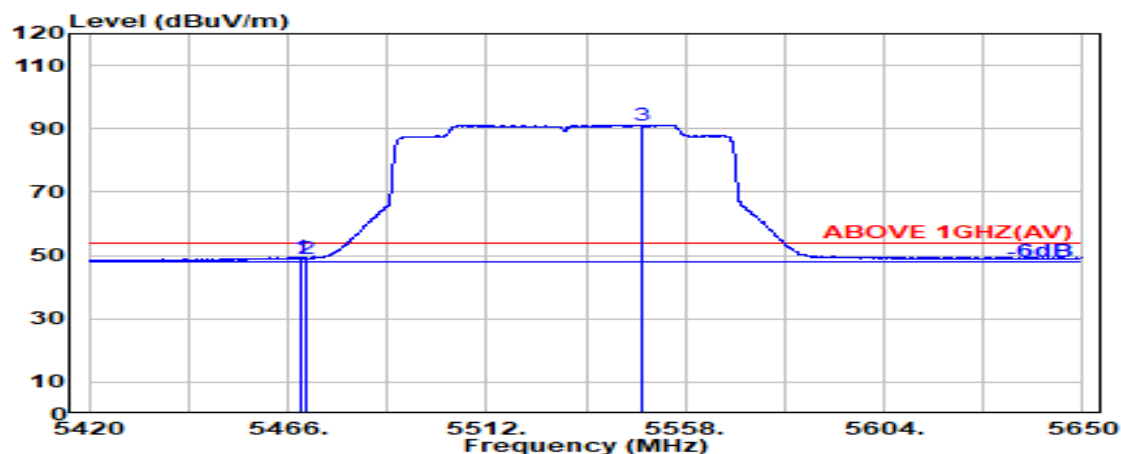

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5469.100	34.16	8.74	34.18	40.73	49.44	54.00	4.56	Average
5470.000	34.16	8.74	34.18	40.35	49.07	54.00	4.93	Average
5548.200	34.10	8.78	34.19	82.51	91.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

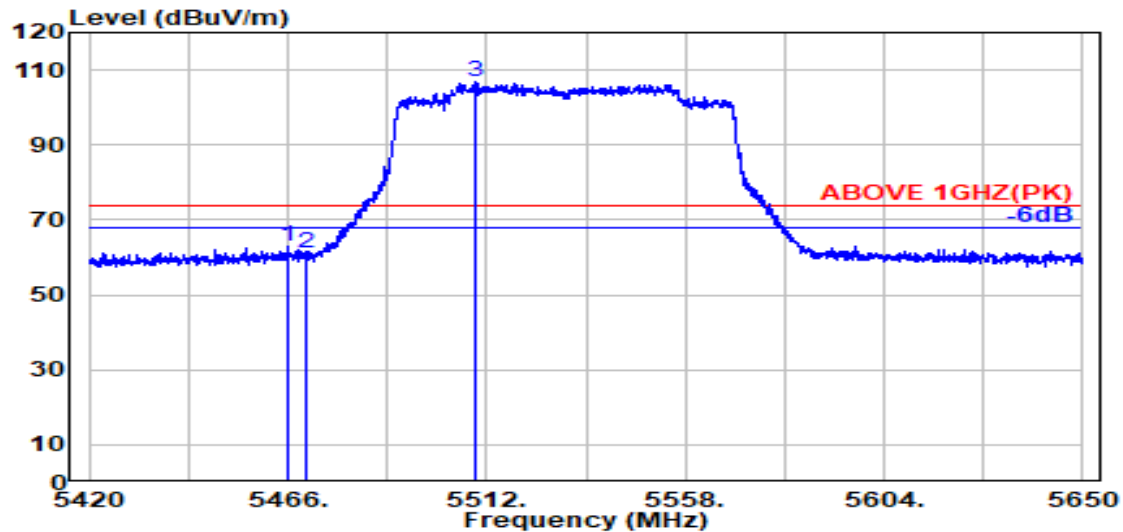

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.17	8.73	34.18	54.08	62.80	74.00	11.20	Peak
5470.000	34.16	8.74	34.18	52.44	61.15	74.00	12.85	Peak
@ 5509.400	34.10	8.76	34.17	98.04	106.73	---	---	Peak

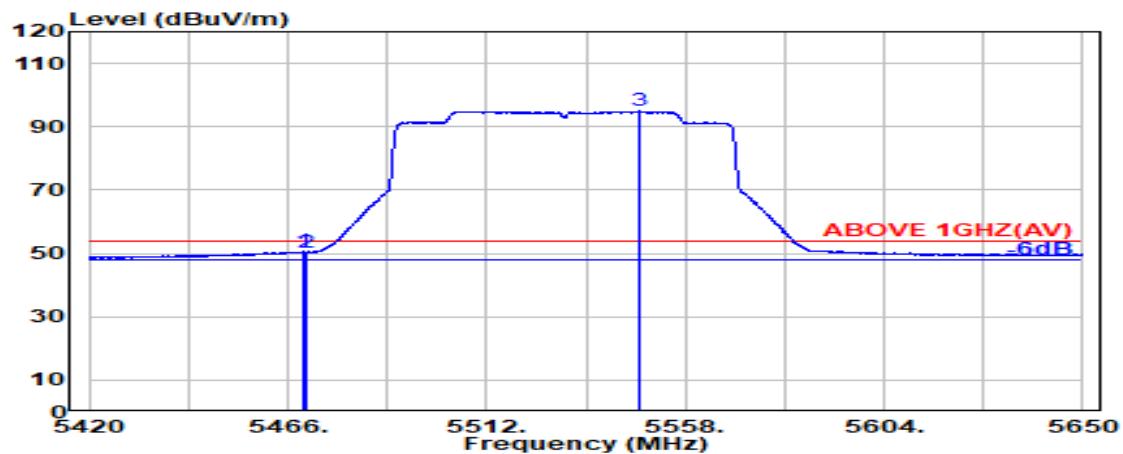

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5469.700	34.16	8.74	34.18	41.79	50.51	54.00	3.49	Average
5470.000	34.16	8.74	34.18	41.55	50.27	54.00	3.73	Average
5547.200	34.10	8.78	34.19	86.20	94.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

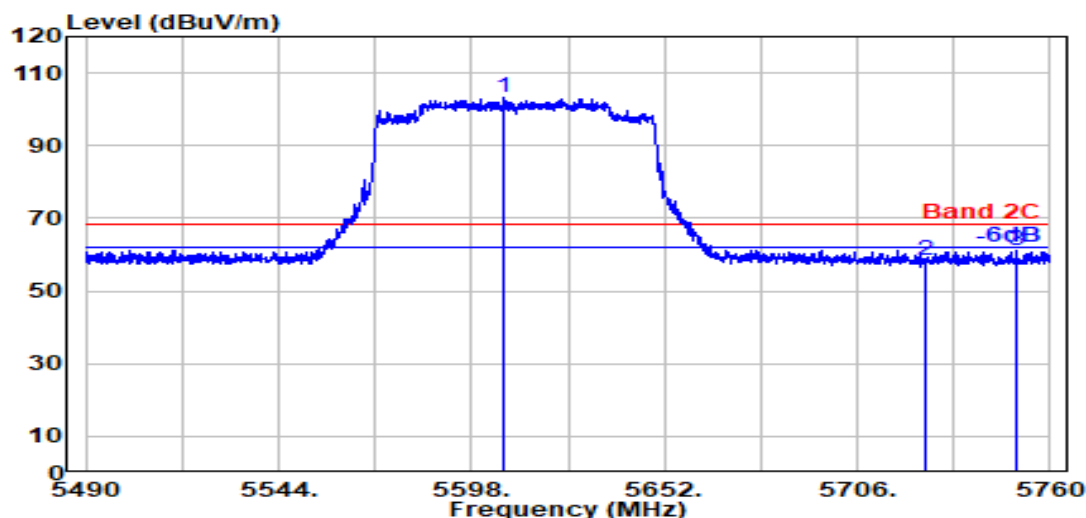

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.800	34.00	8.81	34.22	94.72	103.32	---	---	Peak
5725.000	33.80	8.88	34.28	49.81	58.21	68.20	9.99	Peak
5750.800	33.80	8.90	34.29	52.82	61.23	68.20	6.97	Peak

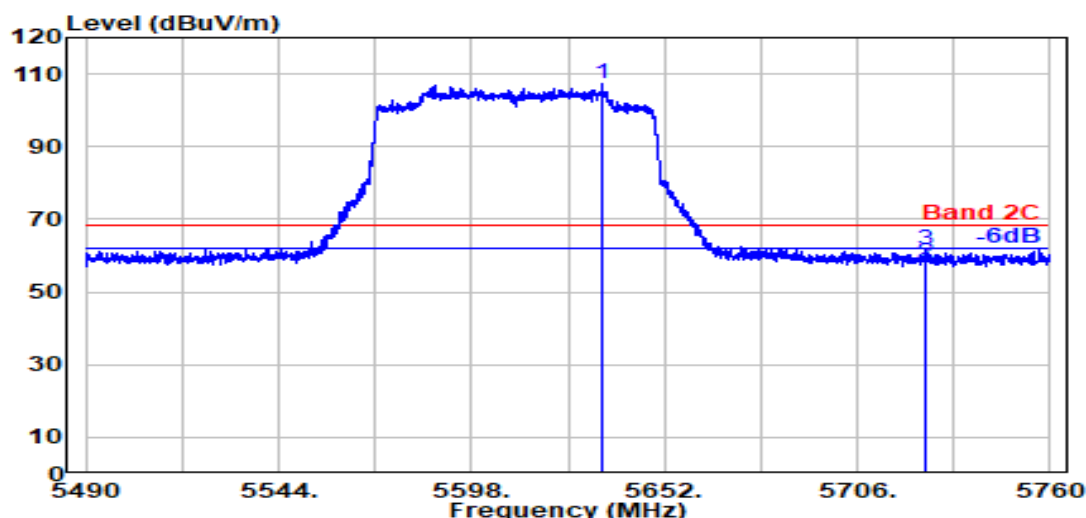

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5634.300	34.00	8.83	34.23	98.58	107.18	---	---	Peak
5725.000	33.80	8.88	34.28	49.73	58.13	68.20	10.07	Peak
5725.400	33.80	8.88	34.28	53.06	61.47	68.20	6.73	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.