

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	101
A.2.3 Emissions in Non-restricted Frequency Bands:.....	104
A.3 DTS/OCCUPIED BANDWIDTH.....	105
A.3.1 DTS/Occupied Bandwidth Result.....	105
A.3.2 Measurement Plots	107
A.4 MAXIMUM PEAK OUTPUT POWER	113
A.4.1 Peak Output Power	113
A.4.2 Average Output Power (Reporting only).....	116
A.5 EMISSION LIMITATIONS	121
A.6 POWER SPECTRAL DENSITY	155
A.6.1 Power Spectral Density Result	155
A.6.2 Measurement Plots	158

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

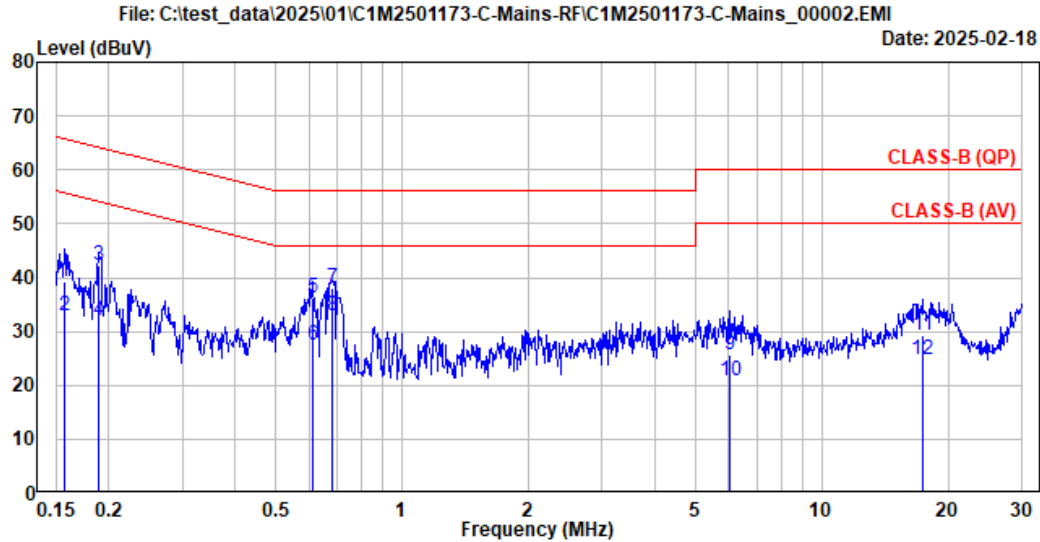

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 20°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90TR	Engineer	: Nick Du
Test Mode	: OPERATING		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.157	10.27	0.03	9.87	19.18	39.35	65.63	26.28	QP
2	0.157	10.27	0.03	9.87	12.67	32.84	55.63	22.79	Average
3	0.189	10.26	0.03	9.86	22.00	42.15	64.10	21.95	QP
4	0.189	10.26	0.03	9.86	11.93	32.08	54.10	22.02	Average
5	0.615	10.26	0.03	9.88	16.01	36.18	56.00	19.82	QP
6	0.615	10.26	0.03	9.88	7.32	27.49	46.00	18.51	Average
7	0.683	10.27	0.04	9.88	17.94	38.13	56.00	17.87	QP
8	0.683	10.27	0.04	9.88	12.75	32.94	46.00	13.06	Average
9	6.027	10.44	0.10	9.92	5.10	25.56	60.00	34.44	QP
10	6.027	10.44	0.10	9.92	0.42	20.88	50.00	29.12	Average
11	17.338	10.82	0.19	10.00	8.42	29.43	60.00	30.57	QP
12	17.338	10.82	0.19	10.00	3.82	24.83	50.00	25.17	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

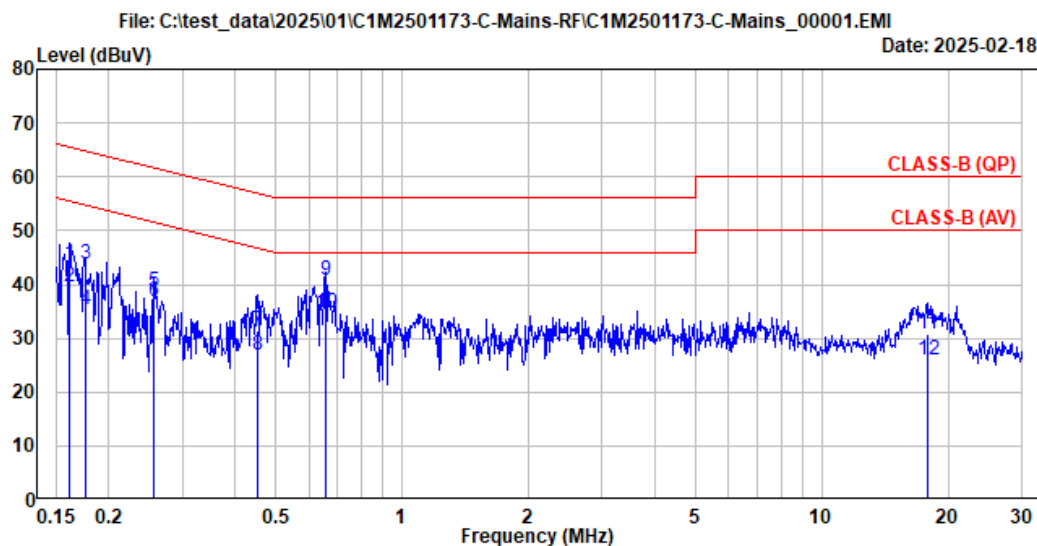

Site No. : No.8 Shielded Room Data No. : 1
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B (QP) Phase : Line
Environment : 20°C/52% Test Rating : 120Vac/60Hz
EUT Model : 16Z90TR Engineer : Nick Du
Test Mode : OPERATING

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.26	0.03	9.87	23.63	43.79	65.38	21.59	QP
2	0.162	10.26	0.03	9.87	19.47	39.63	55.38	15.75	Average
3	0.176	10.25	0.03	9.86	23.57	43.71	64.68	20.97	QP
4	0.176	10.25	0.03	9.86	15.10	35.24	54.68	19.44	Average
5	0.257	10.25	0.03	9.87	18.56	38.71	61.53	22.82	QP
6	0.257	10.25	0.03	9.87	16.64	36.79	51.53	14.74	Average
7	0.451	10.25	0.03	9.88	11.24	31.40	56.85	25.45	QP
8	0.451	10.25	0.03	9.88	6.66	26.82	46.85	20.03	Average
9	0.656	10.26	0.04	9.88	20.44	40.62	56.00	15.38	QP
10	0.656	10.26	0.04	9.88	14.46	34.64	46.00	11.36	Average
11	17.865	10.60	0.19	10.00	10.06	30.85	60.00	29.15	QP
12	17.865	10.60	0.19	10.00	5.21	26.00	50.00	24.00	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/01/23~02/18	Temp./Hum.	20°C/56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.38	26.47	30.45	28.94	40.00	11.06	Peak
196.000	14.88	3.51	25.80	43.96	36.55	43.50	6.95	Peak
445.500	21.93	6.20	26.73	34.45	35.85	46.00	10.15	Peak
594.000	24.00	6.80	27.36	33.92	37.36	46.00	8.64	Peak
742.500	24.75	7.53	27.32	39.88	44.83	46.00	1.17	Peak
967.500	26.73	8.83	26.79	27.74	36.50	54.00	17.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.38	26.47	40.12	38.61	40.00	1.39	Peak
98.000	16.10	2.47	26.28	47.36	39.65	43.50	3.85	Peak
445.500	21.93	6.20	26.73	35.32	36.72	46.00	9.28	Peak
477.500	22.47	6.46	26.94	34.58	36.57	46.00	9.43	Peak
742.500	24.75	7.53	27.32	38.36	43.31	46.00	2.69	Peak
983.000	26.86	8.92	26.75	27.56	36.59	54.00	17.41	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.39	26.47	30.12	28.40	40.00	11.60	Peak
196.000	14.88	3.51	25.80	44.58	37.17	43.50	6.33	Peak
301.000	18.63	4.51	25.61	39.28	36.82	46.00	9.18	Peak
594.000	24.00	6.80	27.36	33.89	37.33	46.00	8.67	Peak
742.500	24.75	7.53	27.32	39.62	44.58	46.00	1.42	Peak
971.500	26.76	8.85	26.78	27.74	36.57	54.00	17.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.46	41.19	38.22	40.00	1.78	Peak
98.000	16.10	2.47	26.28	46.68	38.97	43.50	4.53	Peak
445.500	21.93	6.20	26.73	36.10	37.49	46.00	8.51	Peak
507.500	22.92	6.65	27.10	33.52	35.98	46.00	10.02	Peak
742.500	24.75	7.53	27.32	37.55	42.51	46.00	3.49	Peak
967.000	26.72	8.83	26.80	27.13	35.88	54.00	18.12	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

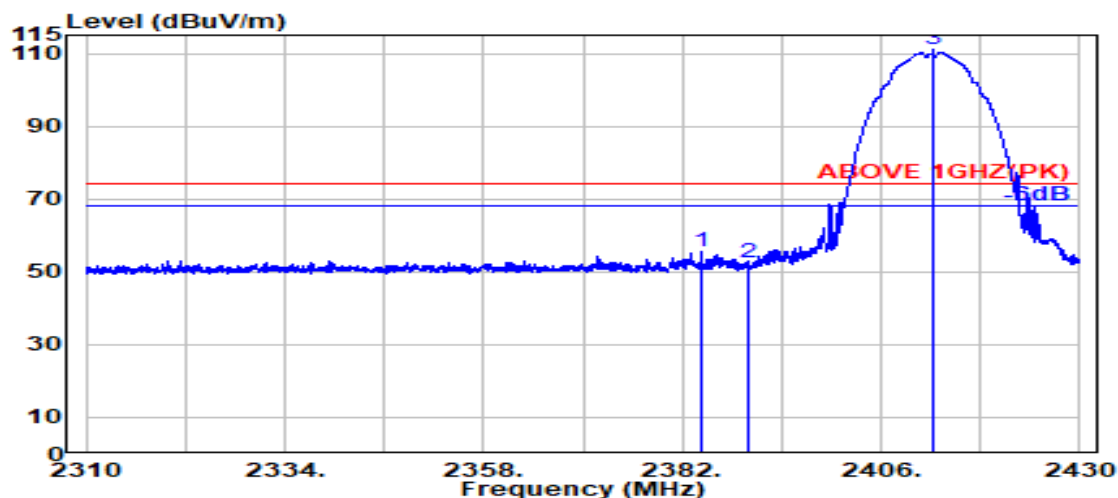

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.200	28.16	5.71	39.88	61.34	55.34	74.00	18.66	Peak
2390.000	28.14	5.72	39.88	58.62	52.60	74.00	21.40	Peak
@ 2412.250	28.15	5.75	39.88	117.20	111.22	---	---	Peak

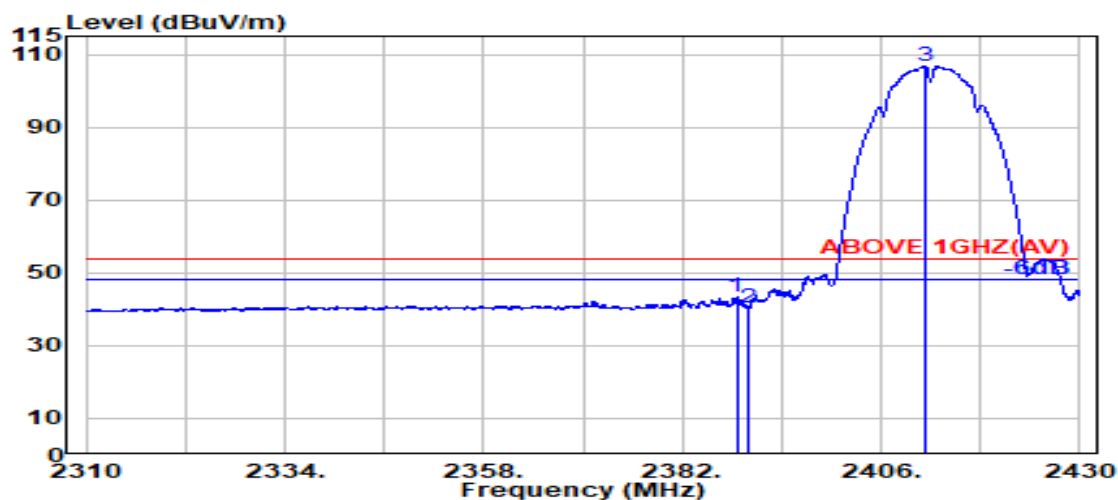

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.550	28.15	5.72	39.88	49.39	43.38	54.00	10.62	Average
2390.000	28.14	5.72	39.88	46.48	40.47	54.00	13.53	Average
@ 2411.200	28.15	5.75	39.88	112.90	106.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

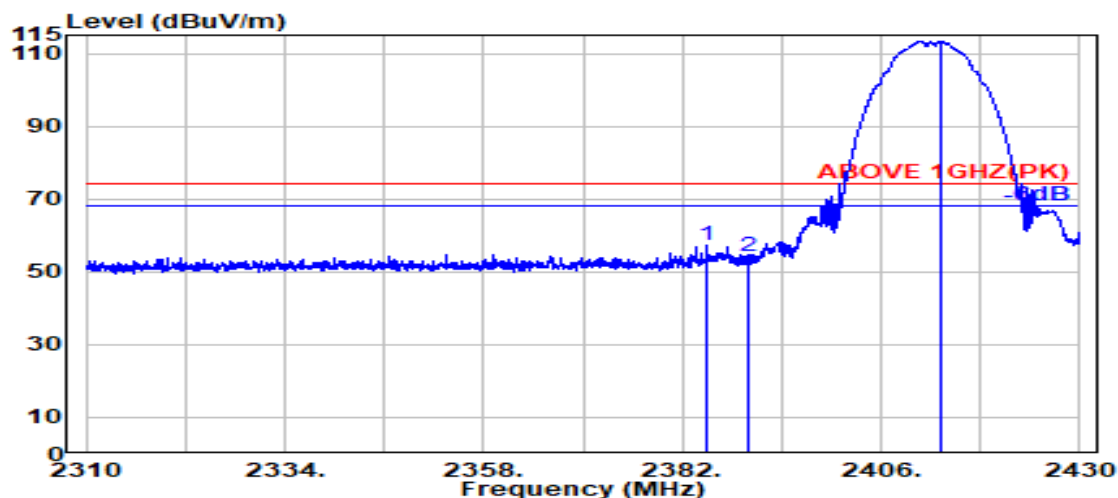

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.950	28.16	5.71	39.88	63.33	57.33	74.00	16.67	Peak
2390.000	28.14	5.72	39.88	60.41	54.40	74.00	19.60	Peak
@ 2413.100	28.15	5.75	39.88	119.29	113.32	---	---	Peak

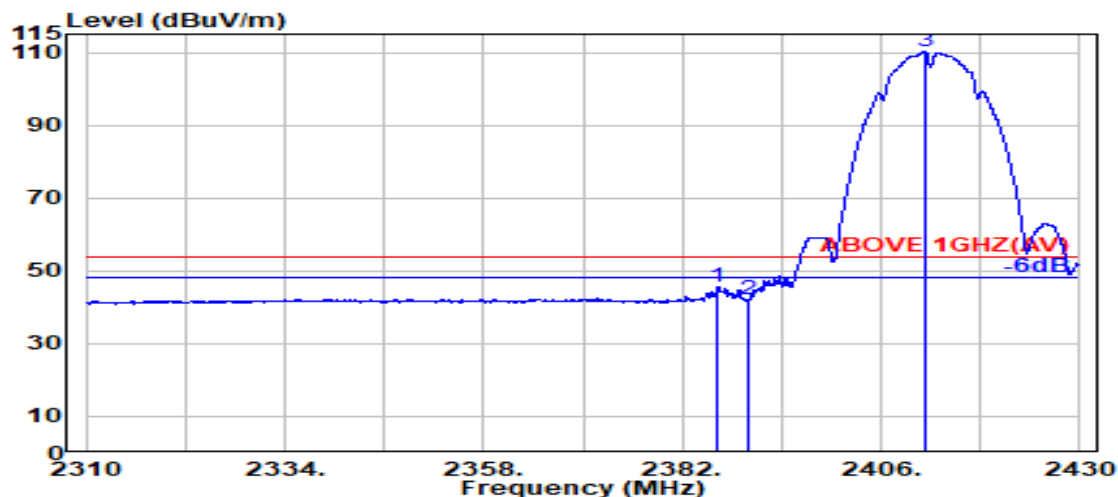


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	28.15	5.72	39.88	51.59	45.58	54.00	8.42	Average
2390.000	28.14	5.72	39.88	47.91	41.89	54.00	12.11	Average
@ 2411.200	28.15	5.75	39.88	116.10	110.12	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

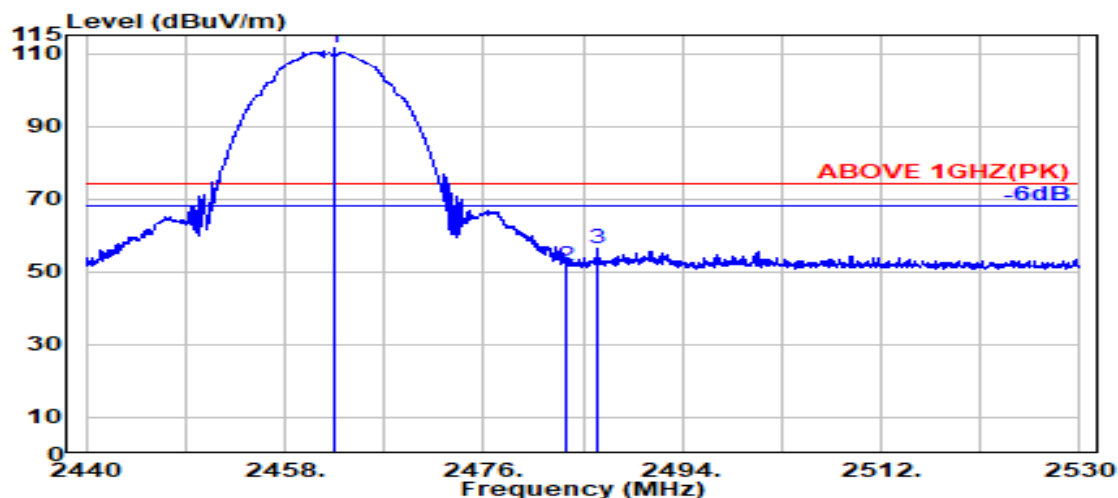

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.450	28.33	5.81	39.87	117.36	111.62	---	---	Peak
2483.500	28.37	5.83	39.87	57.27	51.60	74.00	22.40	Peak
2486.250	28.37	5.83	39.87	62.02	56.36	74.00	17.64	Peak

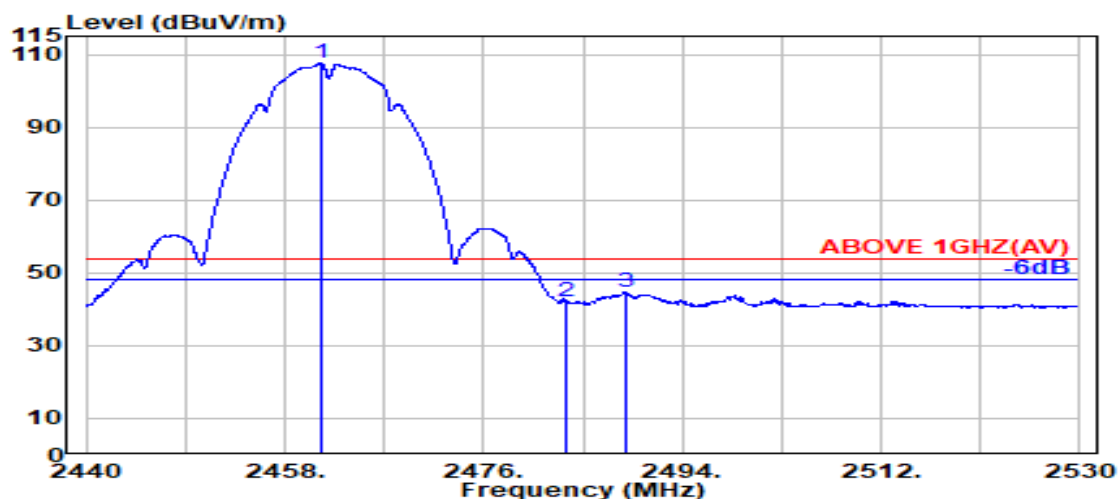

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.32	5.81	39.87	113.30	107.56	---	---	Average
2483.500	28.37	5.83	39.87	47.59	41.91	54.00	12.09	Average
2488.900	28.38	5.84	39.87	50.37	44.72	54.00	9.28	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

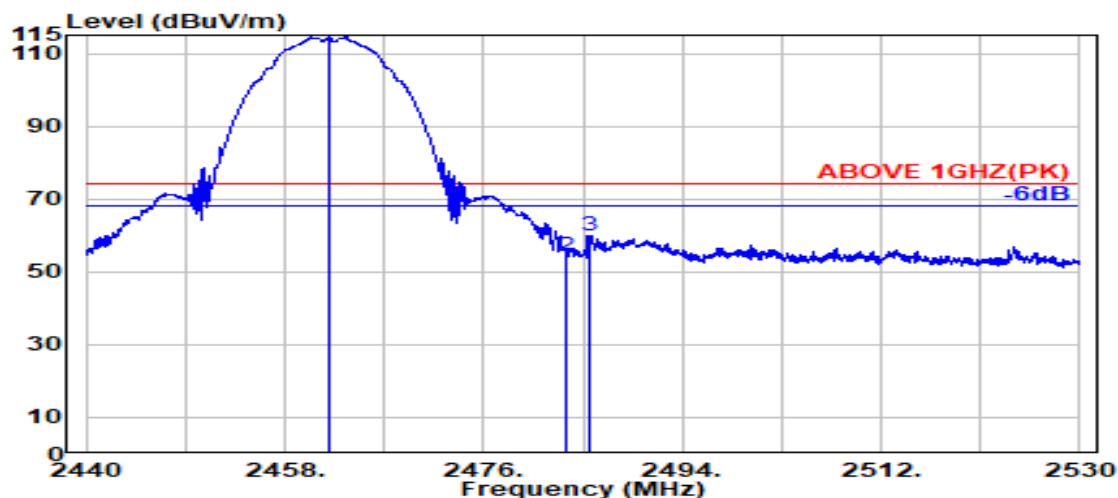

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.950	28.32	5.81	39.87	121.06	115.31	---	---	Peak
2483.500	28.37	5.83	39.87	59.84	54.17	74.00	19.83	Peak
2485.600	28.37	5.83	39.87	65.62	59.95	74.00	14.05	Peak

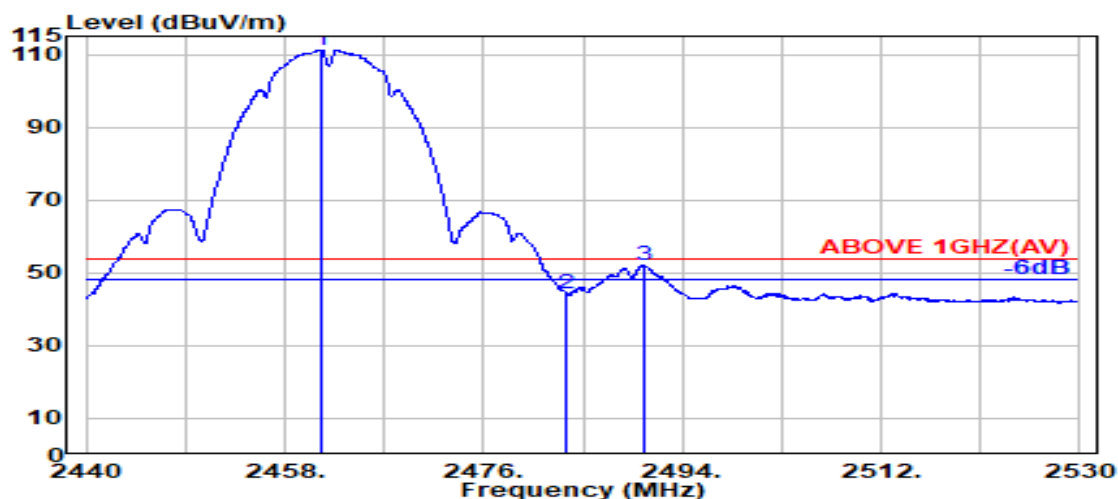


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.32	5.81	39.87	117.01	111.26	---	---	Average
2483.500	28.37	5.83	39.87	50.07	44.40	54.00	9.60	Average
2490.450	28.38	5.84	39.87	57.54	51.89	54.00	2.11	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

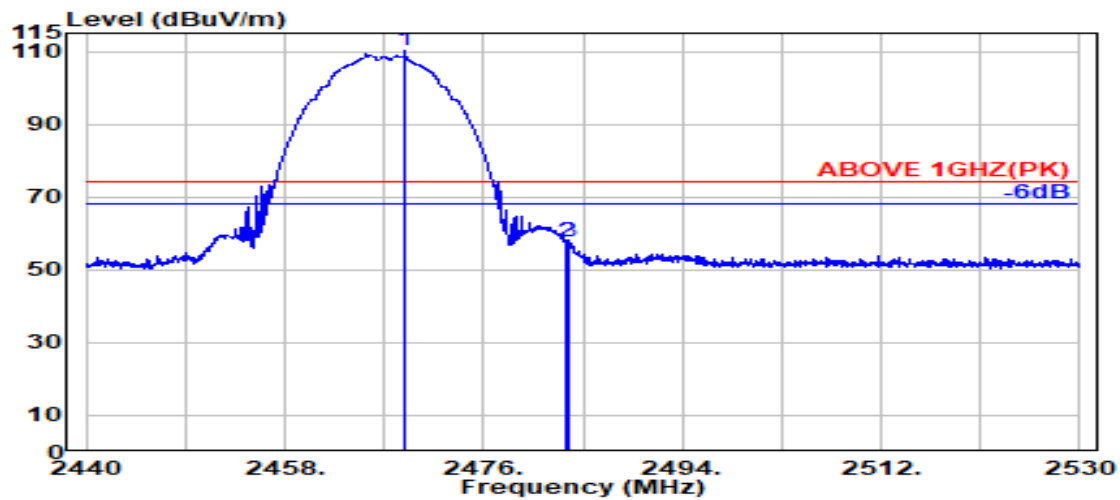

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.34	5.81	39.87	115.88	110.16	---	---	Peak
2483.500	28.37	5.83	39.87	63.57	57.90	74.00	16.10	Peak
2483.700	28.37	5.83	39.87	63.18	57.51	74.00	16.49	Peak

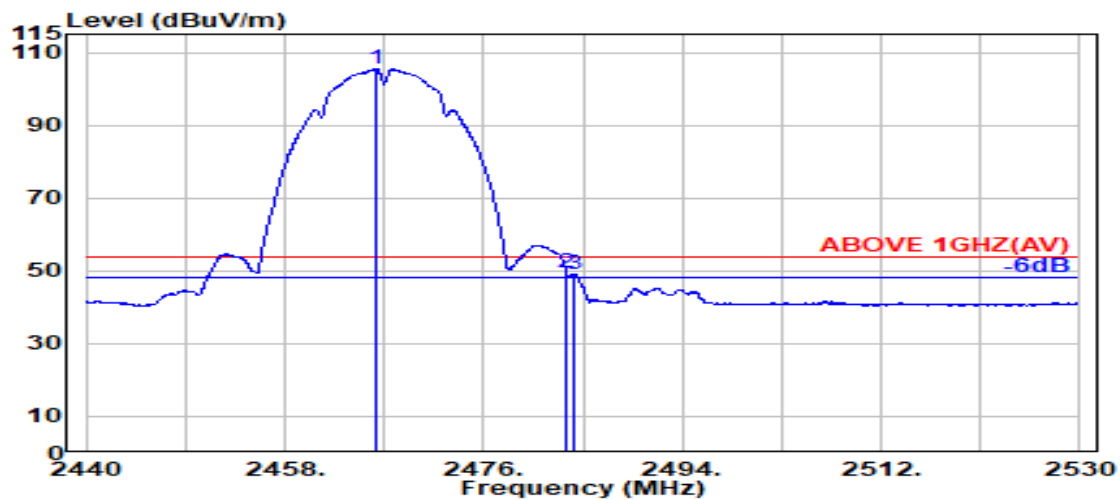


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.33	5.81	39.87	111.21	105.48	---	---	Average
2483.500	28.37	5.83	39.87	55.23	49.55	54.00	4.45	Average
2484.250	28.37	5.83	39.87	54.66	48.99	54.00	5.01	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

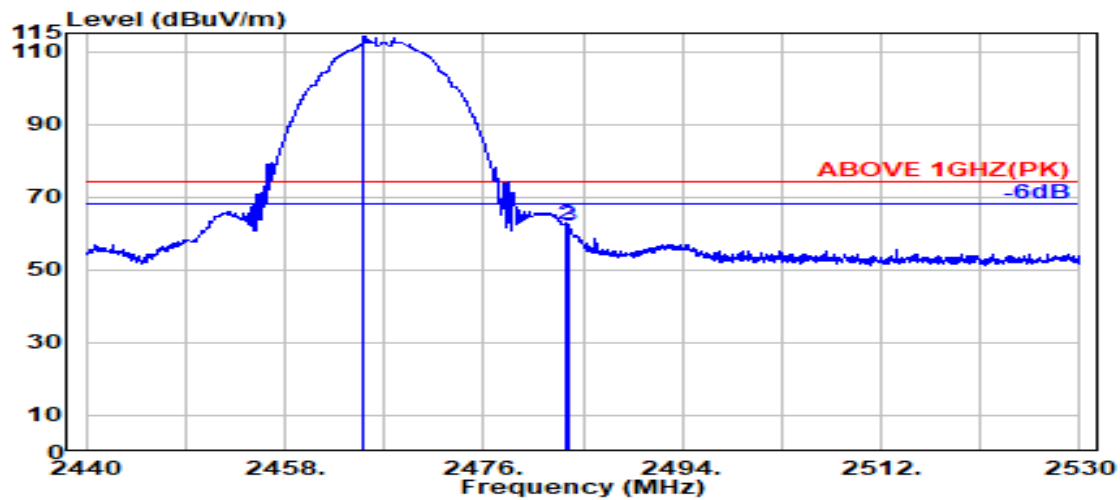

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.150	28.33	5.81	39.87	119.87	114.14	---	---	Peak
2483.500	28.37	5.83	39.87	68.17	62.49	74.00	11.51	Peak
2483.700	28.37	5.83	39.87	67.76	62.08	74.00	11.92	Peak

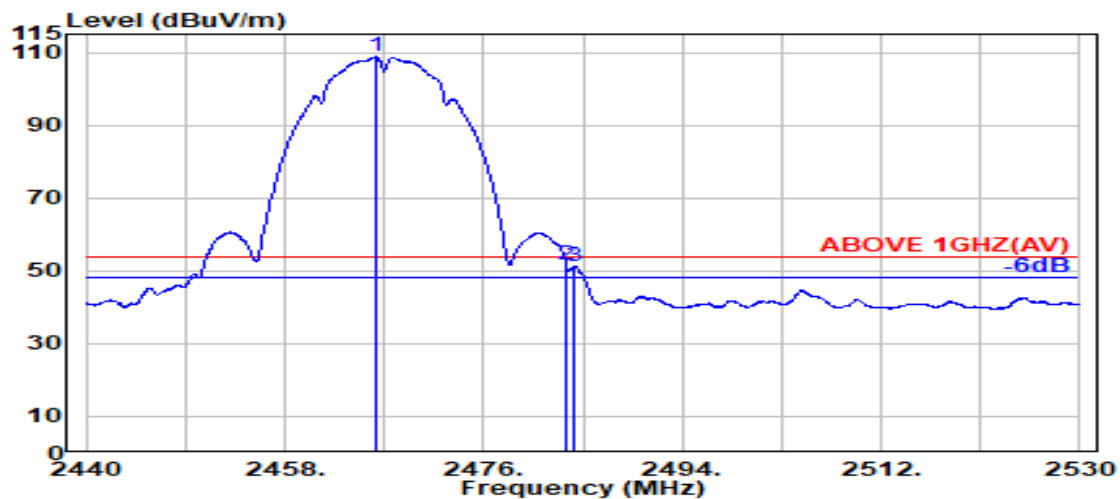


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.250	28.33	5.81	39.87	114.50	108.77	---	---	Average
2483.500	28.37	5.83	39.87	57.13	51.46	54.00	2.54	Average
2484.250	28.37	5.83	39.87	56.87	51.19	54.00	2.81	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

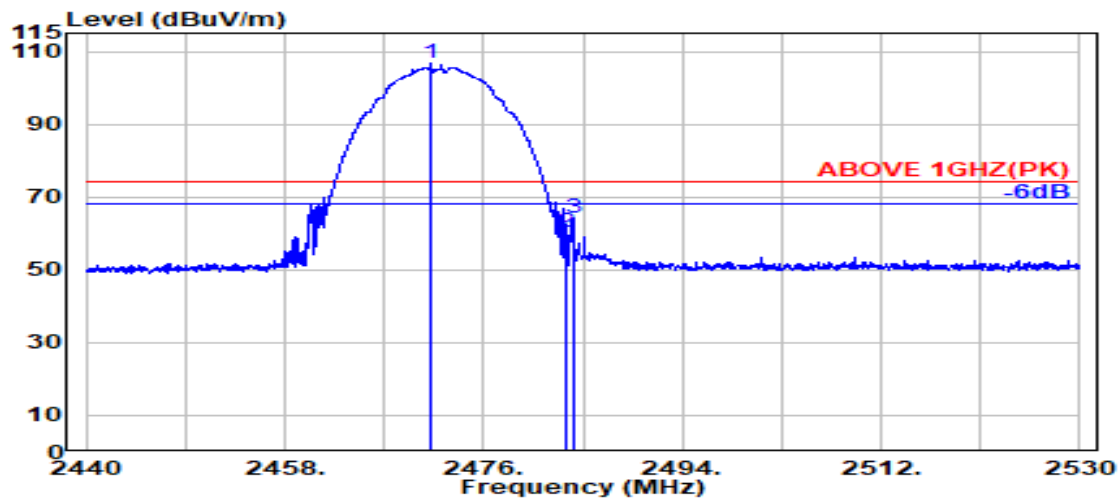

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.34	5.82	39.87	112.25	106.54	---	---	Peak
2483.500	28.37	5.83	39.87	66.09	60.42	74.00	13.58	Peak
2484.100	28.37	5.83	39.87	69.70	64.03	74.00	9.97	Peak

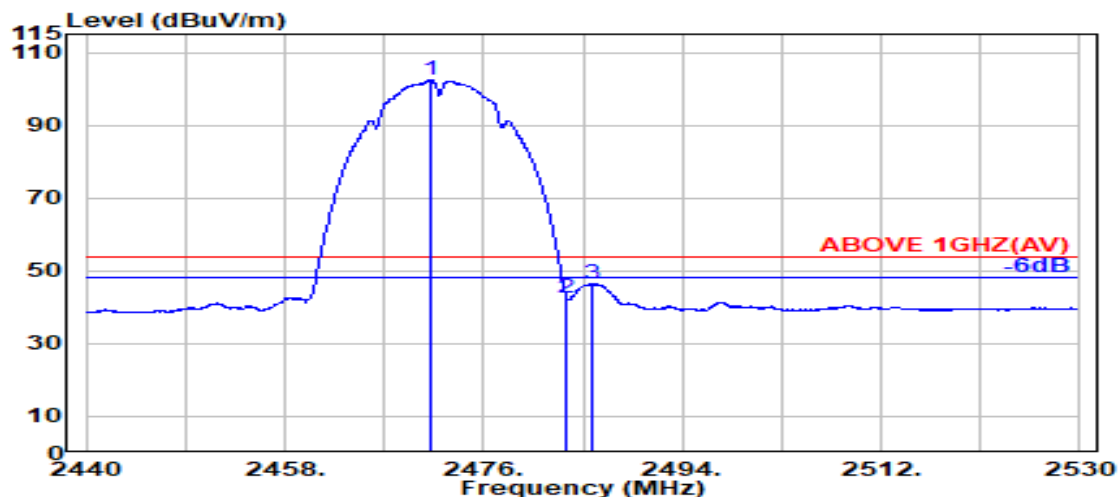


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.34	5.82	39.87	108.14	102.43	---	---	Average
2483.500	28.37	5.83	39.87	48.31	42.64	54.00	11.36	Average
2485.900	28.37	5.83	39.87	52.11	46.45	54.00	7.55	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

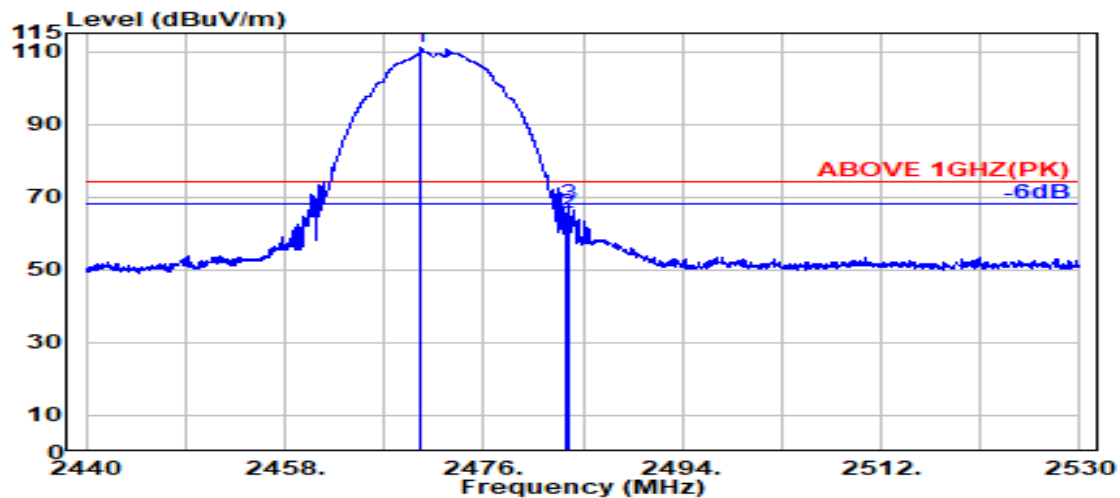

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.250	28.34	5.82	39.87	116.99	111.27	---	---	Peak
2483.500	28.37	5.83	39.87	71.24	65.57	74.00	8.43	Peak
2483.700	28.37	5.83	39.87	73.65	67.98	74.00	6.02	Peak

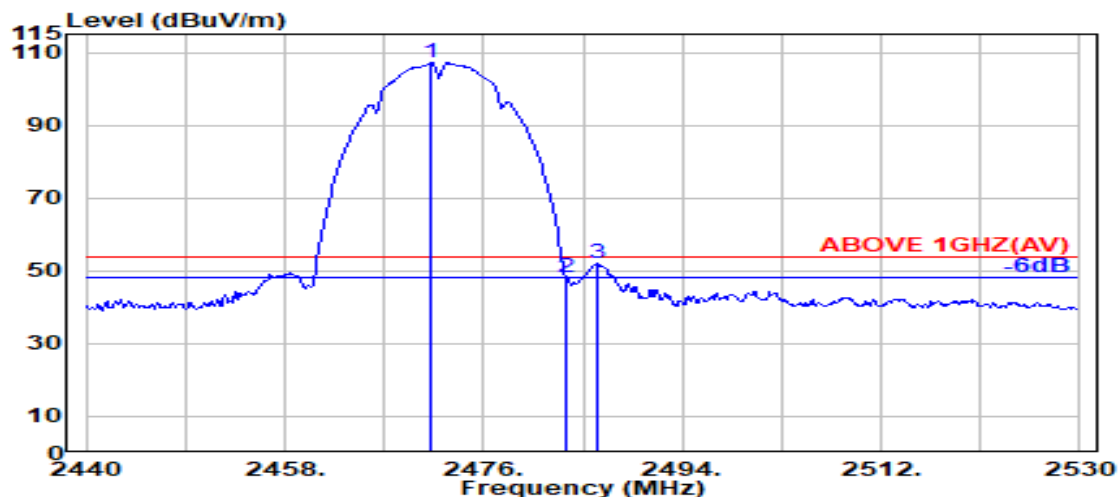

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.309	28.34	5.82	39.87	112.84	107.13	---	---	Average
2483.500	28.37	5.83	39.87	53.77	48.10	54.00	5.90	Average
2486.255	28.37	5.83	39.87	57.54	51.87	54.00	2.13	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

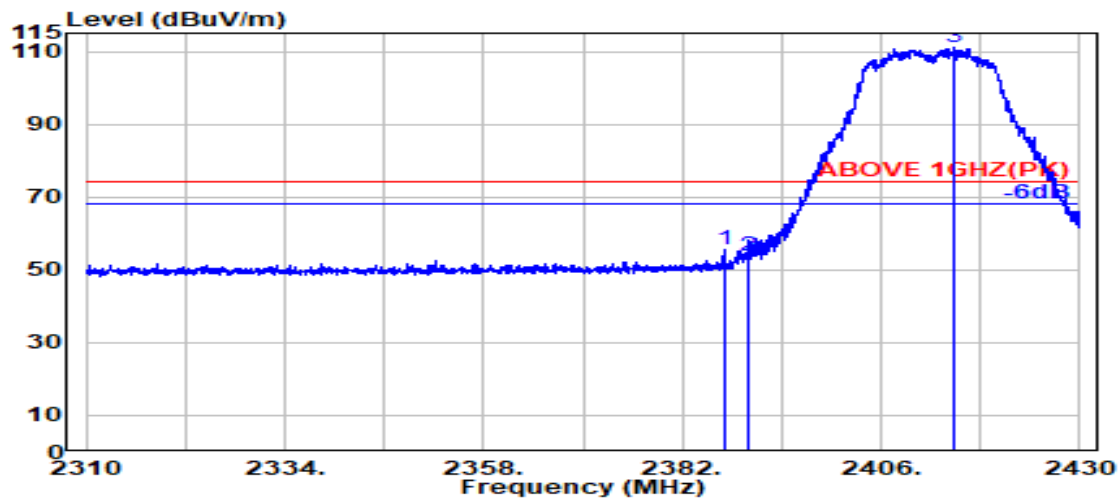

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.15	5.72	39.88	61.36	55.35	74.00	18.65	Peak
2390.000	28.14	5.72	39.88	59.65	53.63	74.00	20.37	Peak
@ 2414.700	28.16	5.75	39.88	117.19	111.22	---	---	Peak

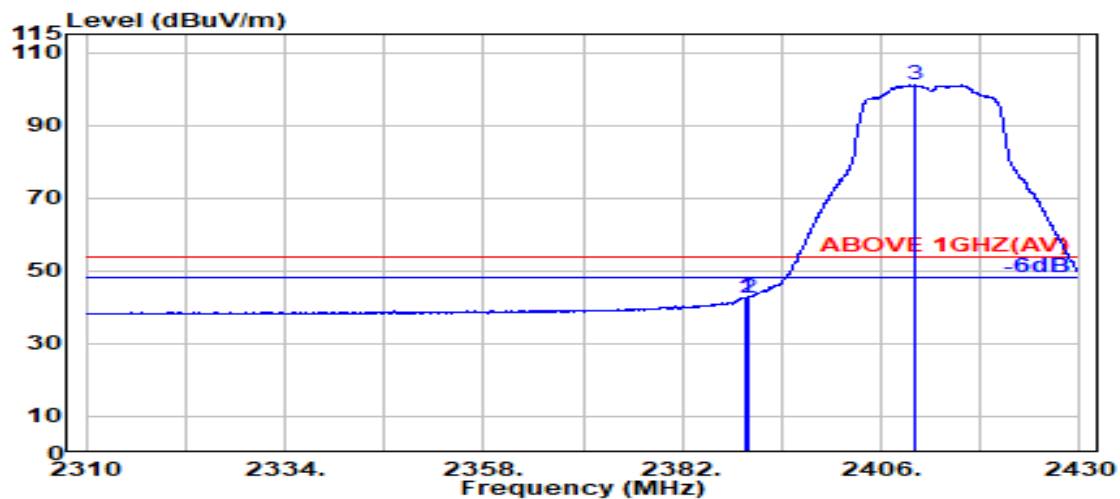

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	48.56	42.54	54.00	11.46	Average
2390.000	28.14	5.72	39.88	48.75	42.73	54.00	11.27	Average
@ 2410.100	28.14	5.74	39.88	106.96	100.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

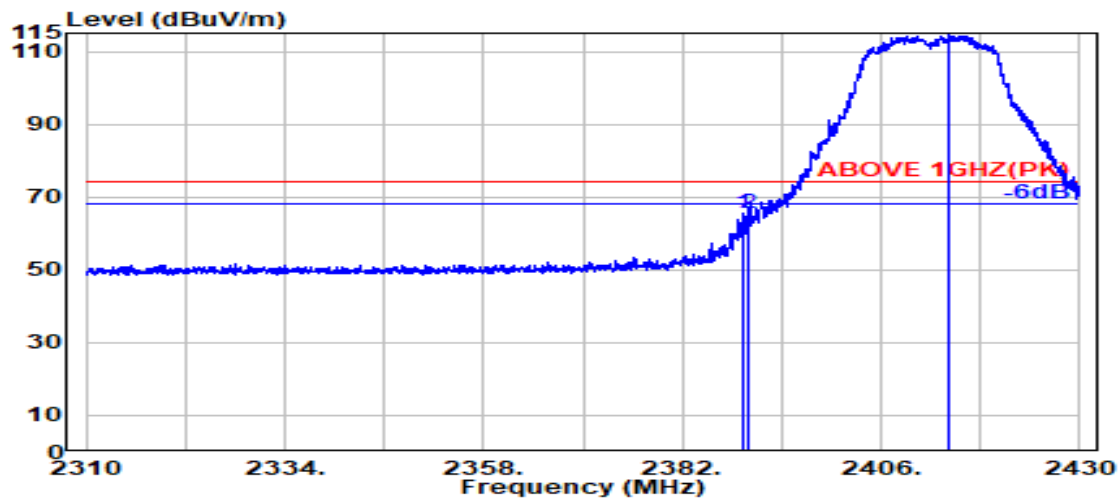

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	71.60	65.59	74.00	8.41	Peak
2390.000	28.14	5.72	39.88	71.43	65.41	74.00	8.59	Peak
@ 2414.200	28.16	5.75	39.88	120.36	114.39	---	---	Peak

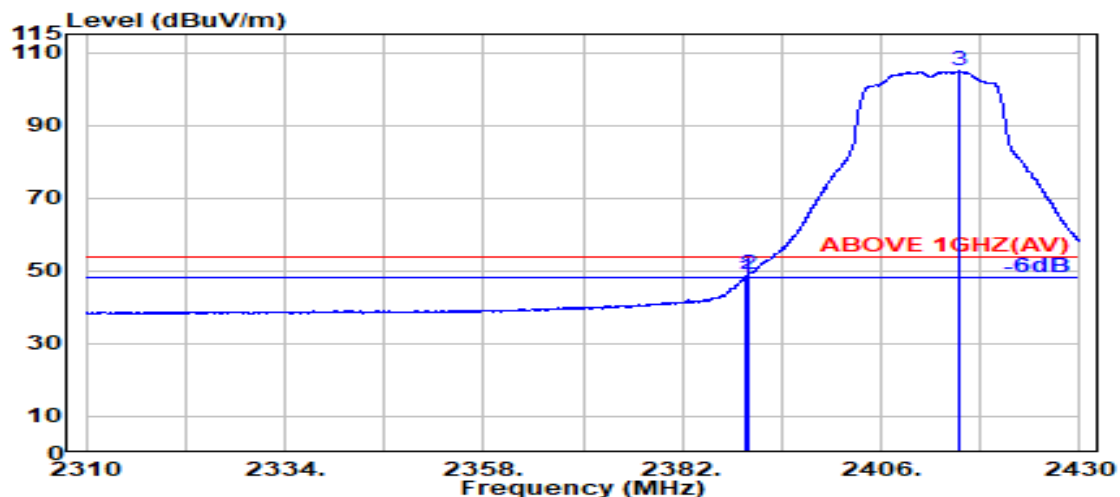

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	54.14	48.12	54.00	5.88	Average
2390.000	28.14	5.72	39.88	55.24	49.22	54.00	4.78	Average
@ 2415.550	28.16	5.75	39.88	110.81	104.85	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

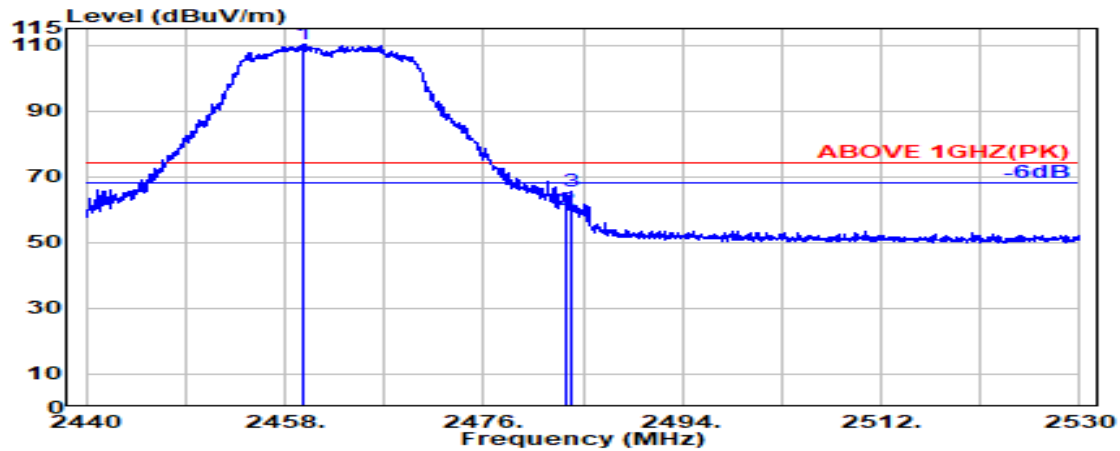

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.750	28.32	5.80	39.87	115.93	110.18	---	---	Peak
2483.500	28.37	5.83	39.87	65.63	59.96	74.00	14.04	Peak
2484.000	28.37	5.83	39.87	71.17	65.50	74.00	8.50	Peak

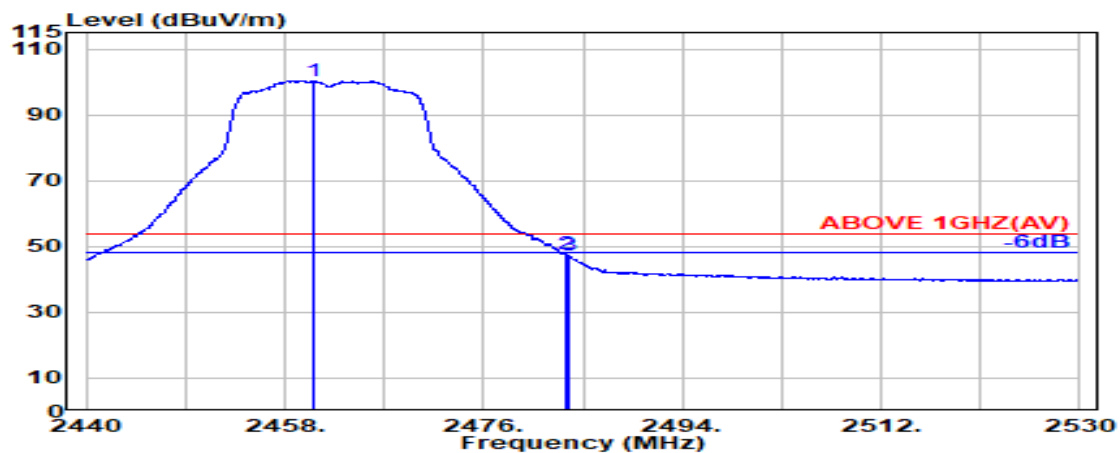

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.550	28.32	5.80	39.87	106.15	100.40	---	---	Average
2483.500	28.37	5.83	39.87	53.22	47.55	54.00	6.45	Average
2483.700	28.37	5.83	39.87	52.83	47.16	54.00	6.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

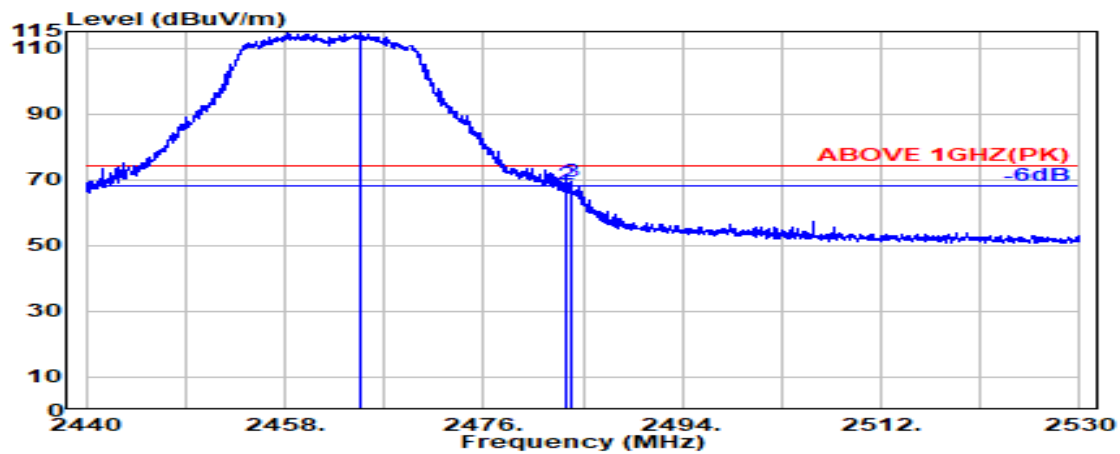

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.850	28.33	5.81	39.87	120.70	114.97	---	---	Peak
2483.500	28.37	5.83	39.87	74.20	68.53	74.00	5.47	Peak
2483.950	28.37	5.83	39.87	75.04	69.37	74.00	4.63	Peak

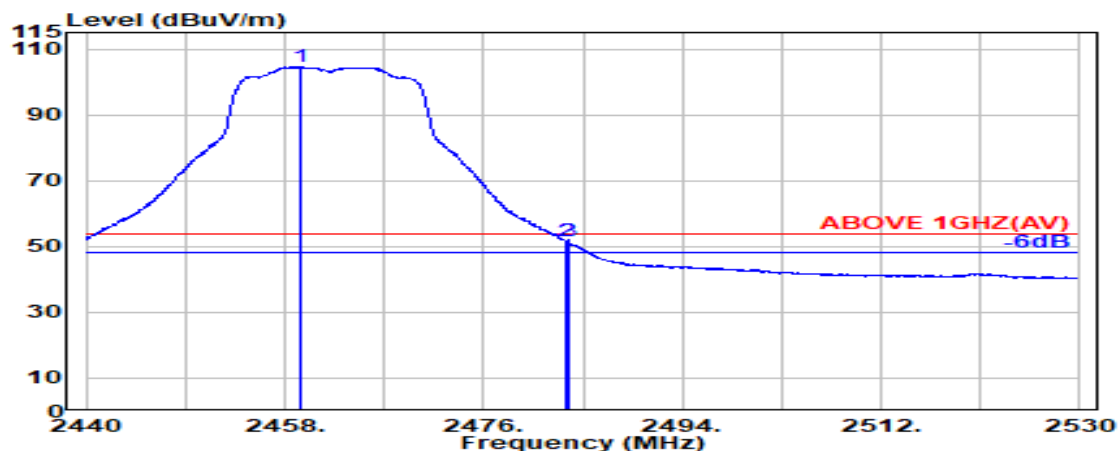


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	28.32	5.80	39.87	110.30	104.55	---	---	Average
2483.500	28.37	5.83	39.87	57.46	51.78	54.00	2.22	Average
2483.700	28.37	5.83	39.87	57.21	51.54	54.00	2.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

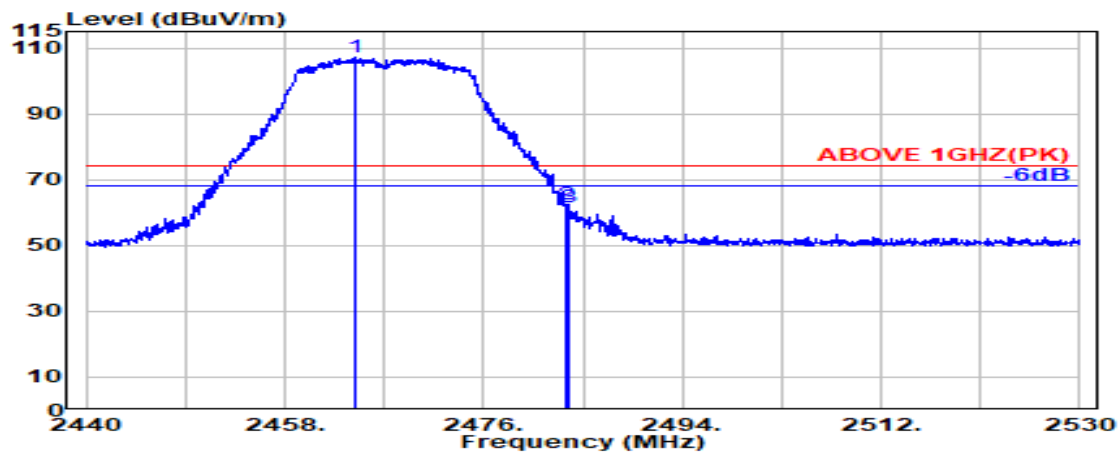

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.33	5.81	39.87	112.83	107.09	---	---	Peak
2483.500	28.37	5.83	39.87	68.32	62.65	74.00	11.35	Peak
2483.700	28.37	5.83	39.87	67.13	61.46	74.00	12.54	Peak

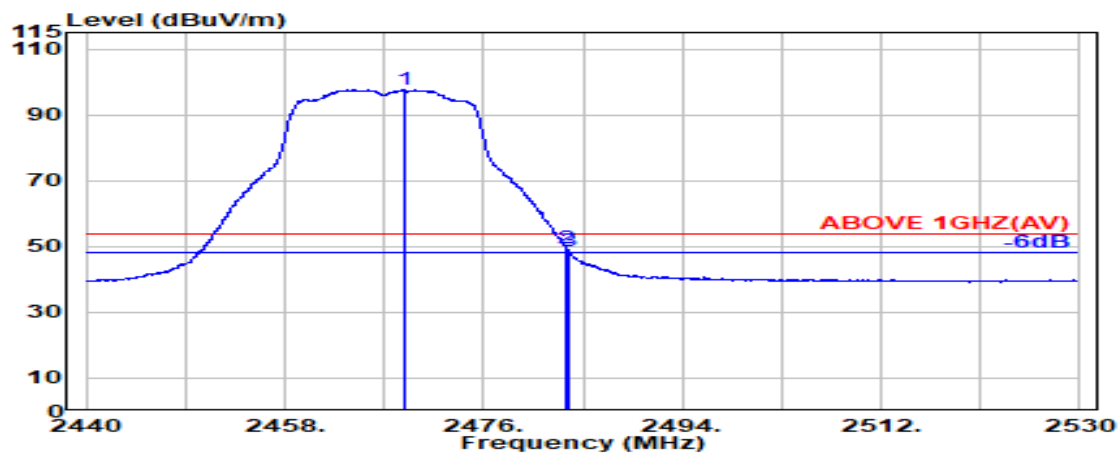

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	28.34	5.81	39.87	103.22	97.50	---	---	Average
2483.500	28.37	5.83	39.87	55.15	49.47	54.00	4.53	Average
2483.700	28.37	5.83	39.87	54.31	48.64	54.00	5.36	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

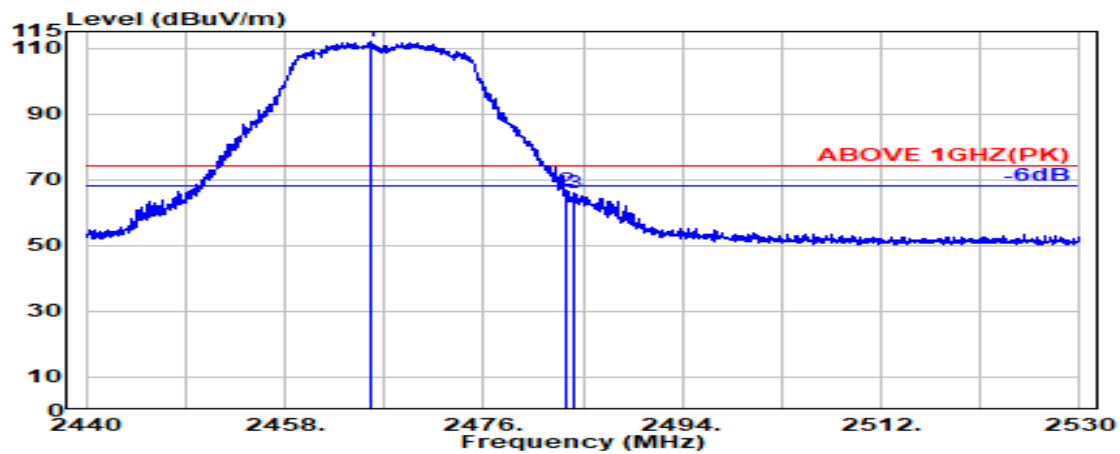

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.800	28.33	5.81	39.87	117.54	111.80	---	---	Peak
2483.500	28.37	5.83	39.87	72.63	66.96	74.00	7.04	Peak
2484.250	28.37	5.83	39.87	71.49	65.82	74.00	8.18	Peak

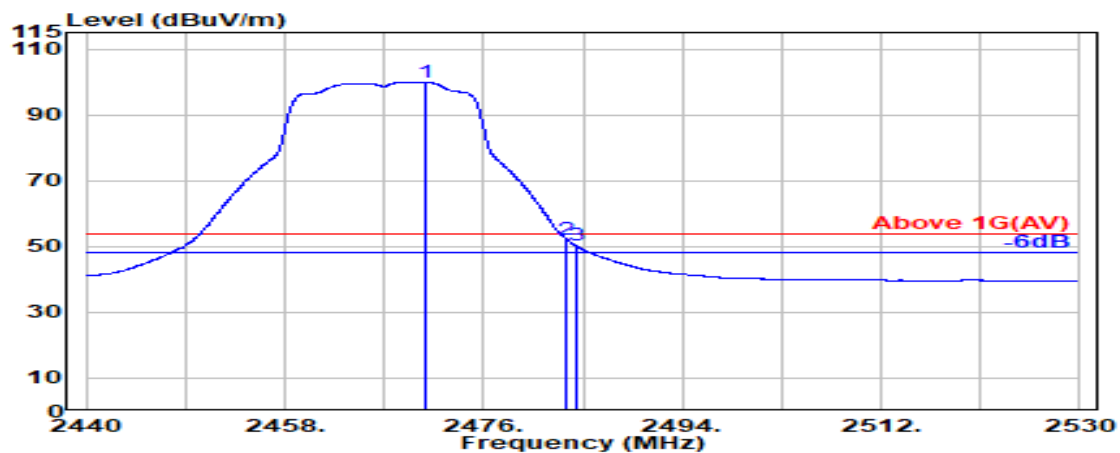

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.700	28.34	5.82	39.87	105.67	99.95	---	---	Average
2483.500	28.37	5.83	39.87	57.94	52.27	54.00	1.73	Average
2484.400	28.37	5.83	39.87	55.84	50.17	54.00	3.83	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

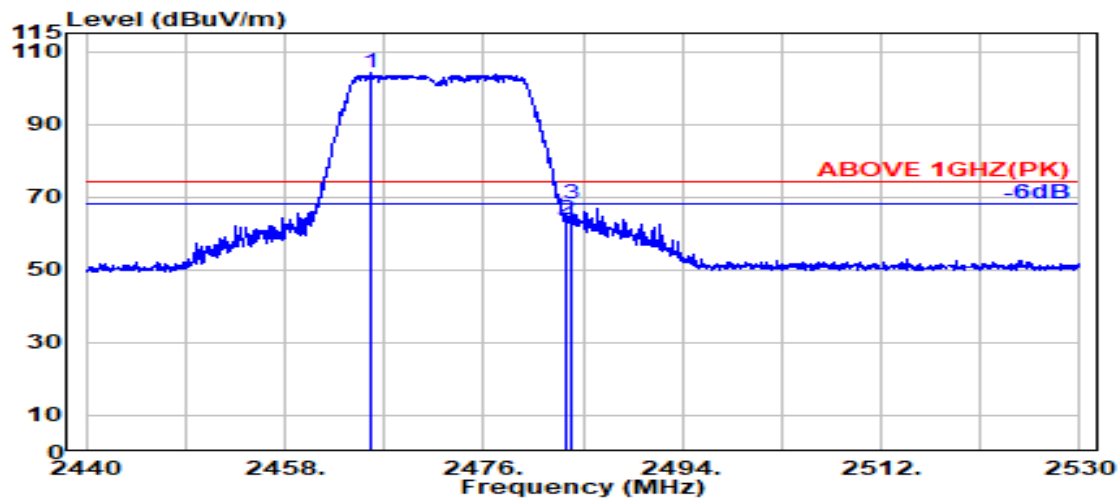

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.750	28.33	5.81	39.87	109.85	104.12	---	---	Peak
2483.500	28.37	5.83	39.87	69.36	63.69	74.00	10.31	Peak
2483.950	28.37	5.83	39.87	73.96	68.28	74.00	5.72	Peak

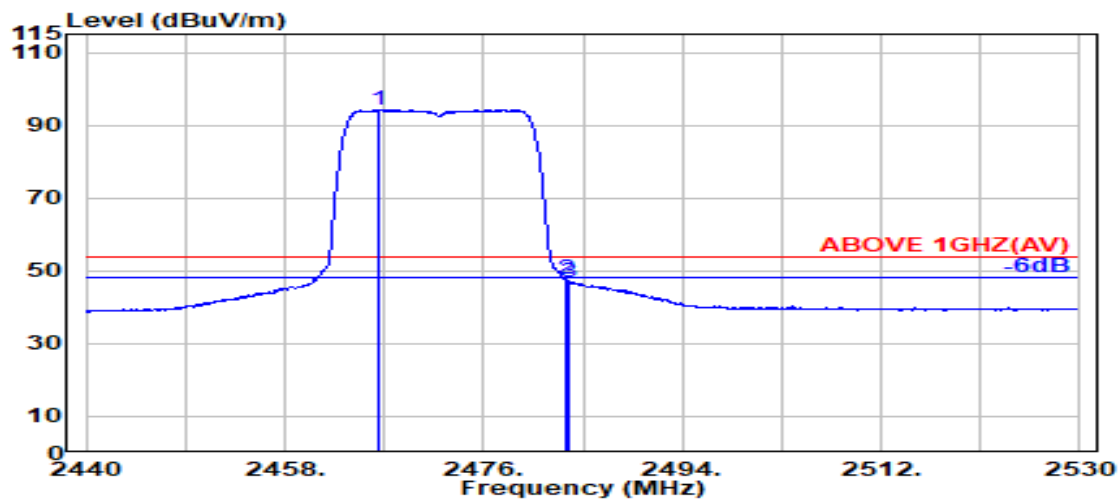

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.450	28.33	5.81	39.87	99.99	94.26	---	---	Average
2483.500	28.37	5.83	39.87	53.38	47.71	54.00	6.29	Average
2483.700	28.37	5.83	39.87	52.60	46.93	54.00	7.07	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

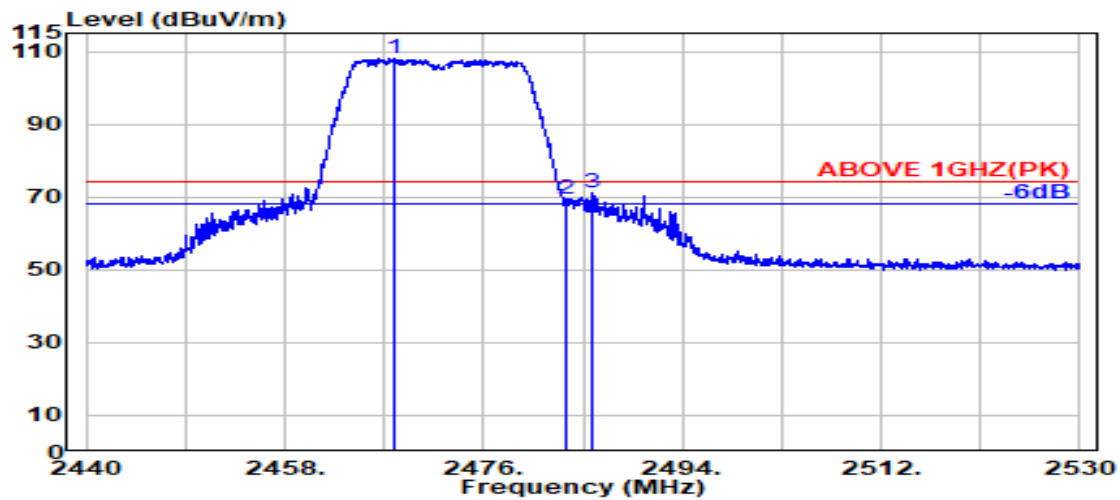

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	28.34	5.81	39.87	113.99	108.26	---	---	Peak
2483.500	28.37	5.83	39.87	75.03	69.35	74.00	4.65	Peak
2485.900	28.37	5.83	39.87	77.00	71.33	74.00	2.67	Peak

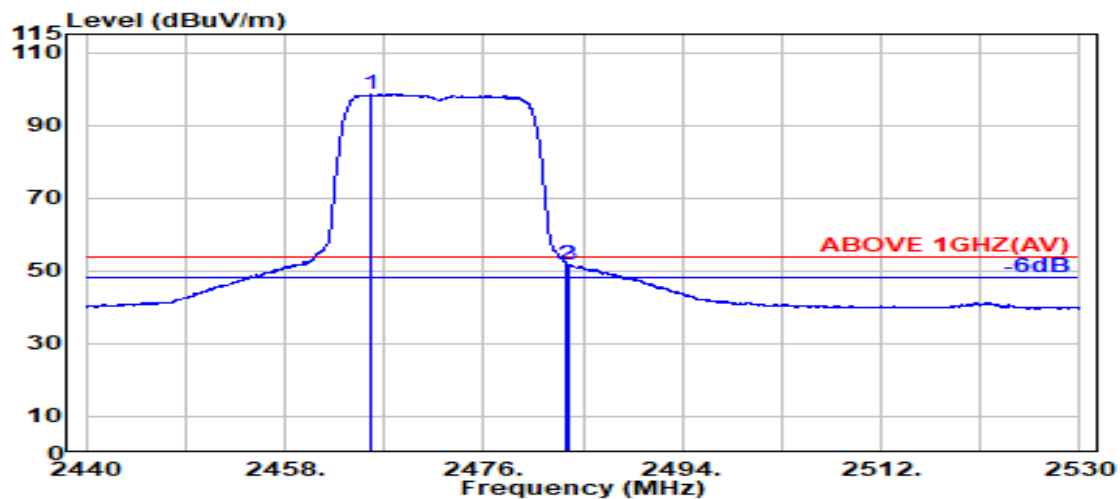

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.33	5.81	39.87	104.20	98.47	---	---	Average
2483.500	28.37	5.83	39.87	57.51	51.83	54.00	2.17	Average
2483.800	28.37	5.83	39.87	57.39	51.72	54.00	2.28	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

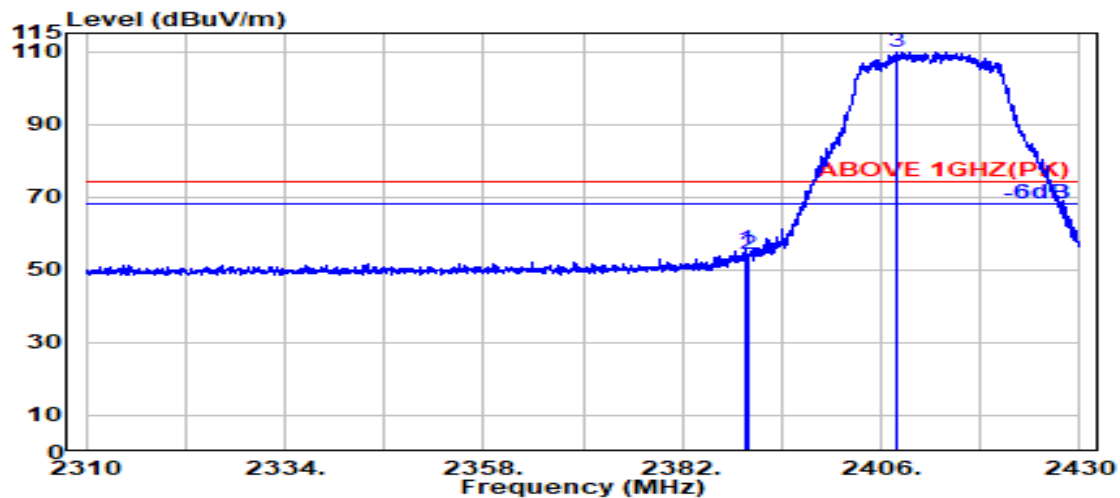

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	61.40	55.38	74.00	18.62	Peak
2390.000	28.14	5.72	39.88	60.23	54.21	74.00	19.79	Peak
@ 2408.000	28.13	5.74	39.88	115.94	109.94	---	---	Peak

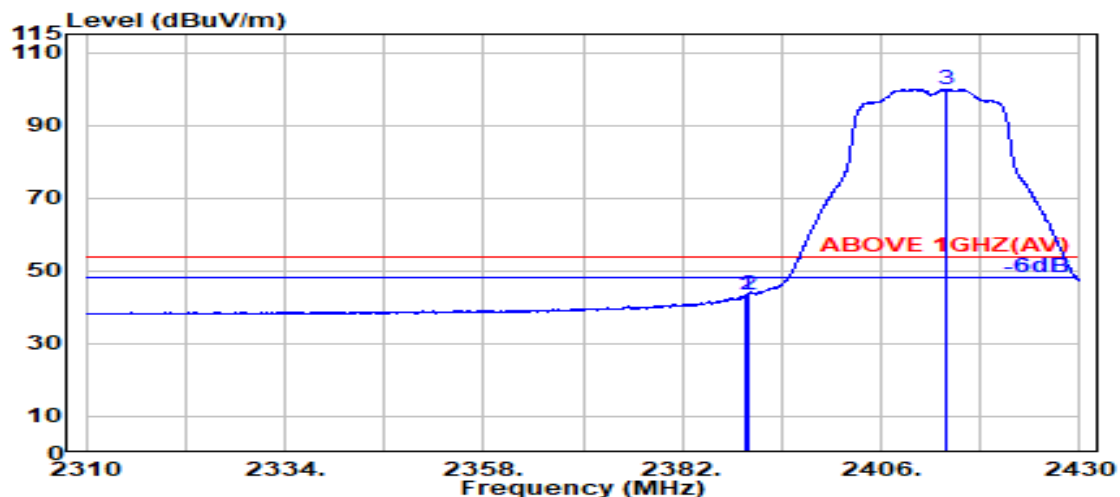

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	49.22	43.21	54.00	10.79	Average
2390.000	28.14	5.72	39.88	49.35	43.34	54.00	10.66	Average
@ 2414.000	28.16	5.75	39.88	105.91	99.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

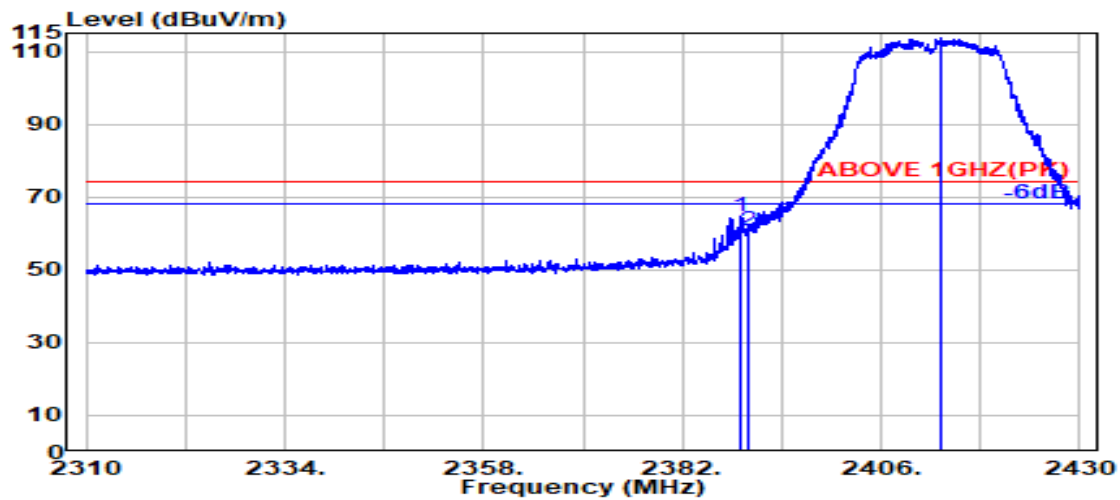

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.88	70.70	64.68	74.00	9.32	Peak
2390.000	28.14	5.72	39.88	66.93	60.91	74.00	13.09	Peak
@ 2413.100	28.15	5.75	39.88	119.64	113.66	---	---	Peak

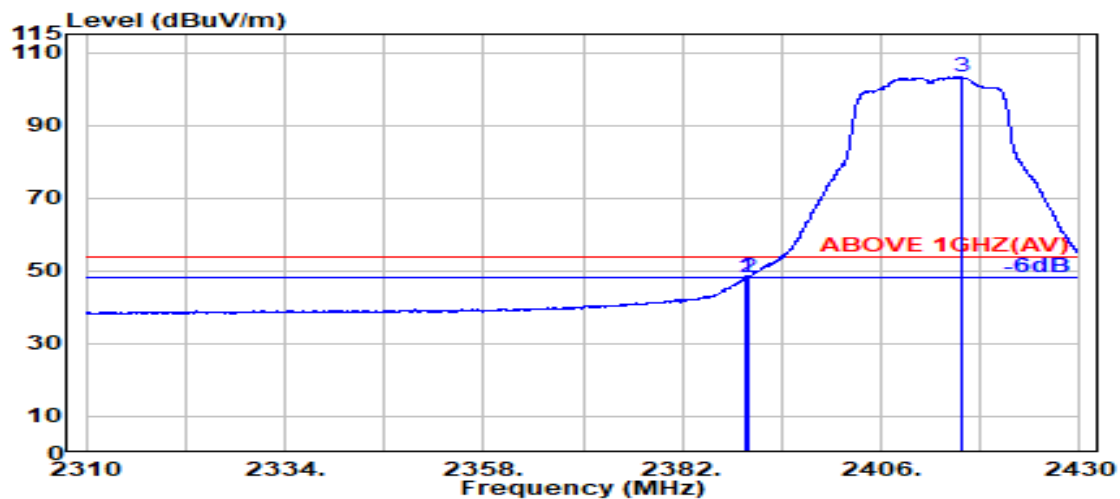

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	54.02	48.00	54.00	6.00	Average
2390.000	28.14	5.72	39.88	54.27	48.26	54.00	5.74	Average
@ 2415.650	28.16	5.75	39.88	109.16	103.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

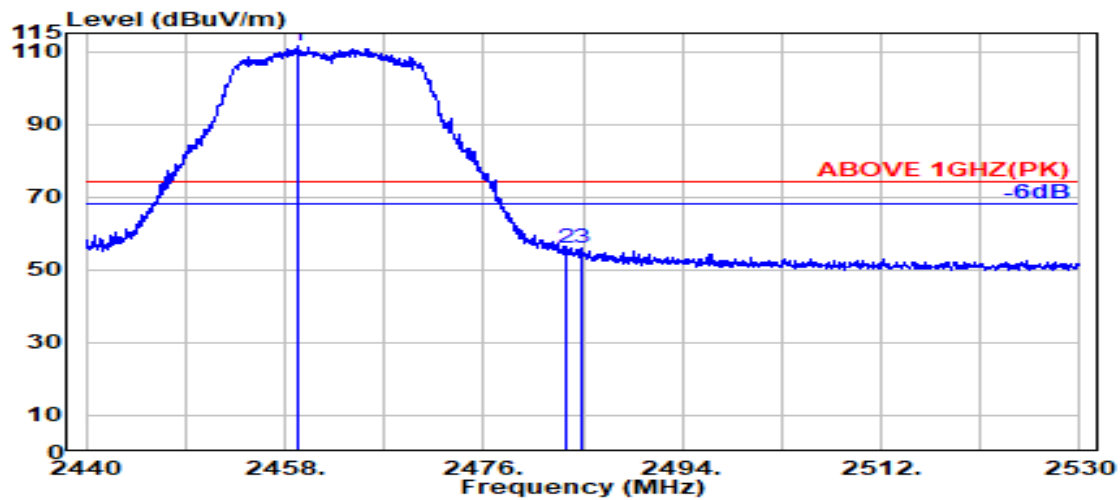

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.100	28.32	5.80	39.87	117.29	111.54	---	---	Peak
2483.500	28.37	5.83	39.87	61.62	55.94	74.00	18.06	Peak
2484.800	28.37	5.83	39.87	61.69	56.02	74.00	17.98	Peak

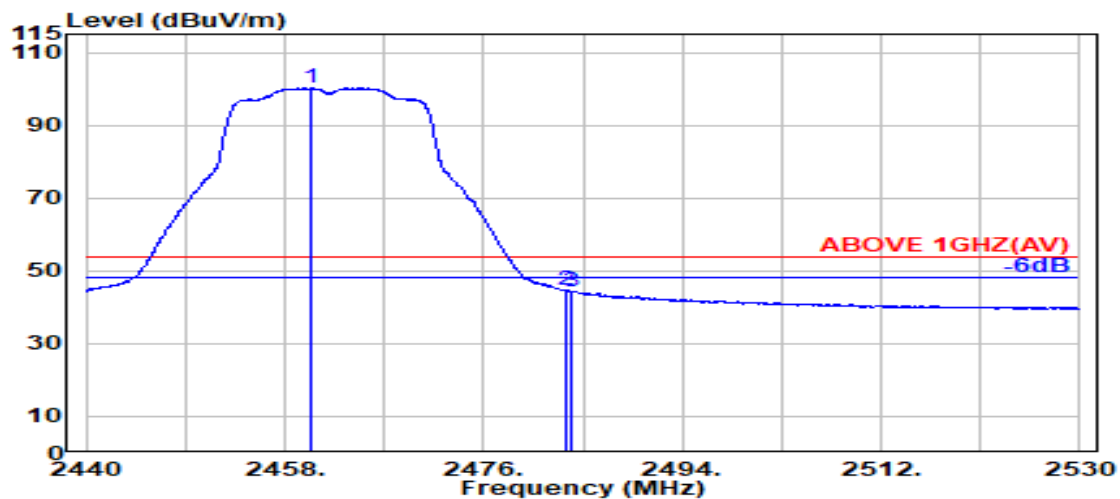

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.450	28.32	5.80	39.87	106.00	100.25	---	---	Average
2483.500	28.37	5.83	39.87	50.37	44.70	54.00	9.30	Average
2483.850	28.37	5.83	39.87	50.08	44.41	54.00	9.59	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

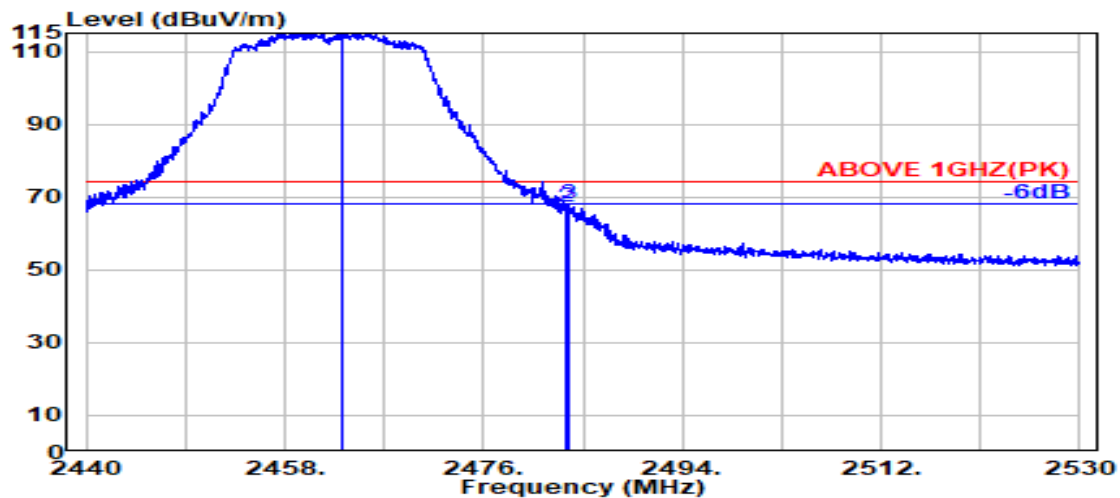

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.100	28.33	5.81	39.87	121.25	115.51	---	---	Peak
2483.500	28.37	5.83	39.87	72.95	67.28	74.00	6.72	Peak
2483.700	28.37	5.83	39.87	73.63	67.96	74.00	6.04	Peak

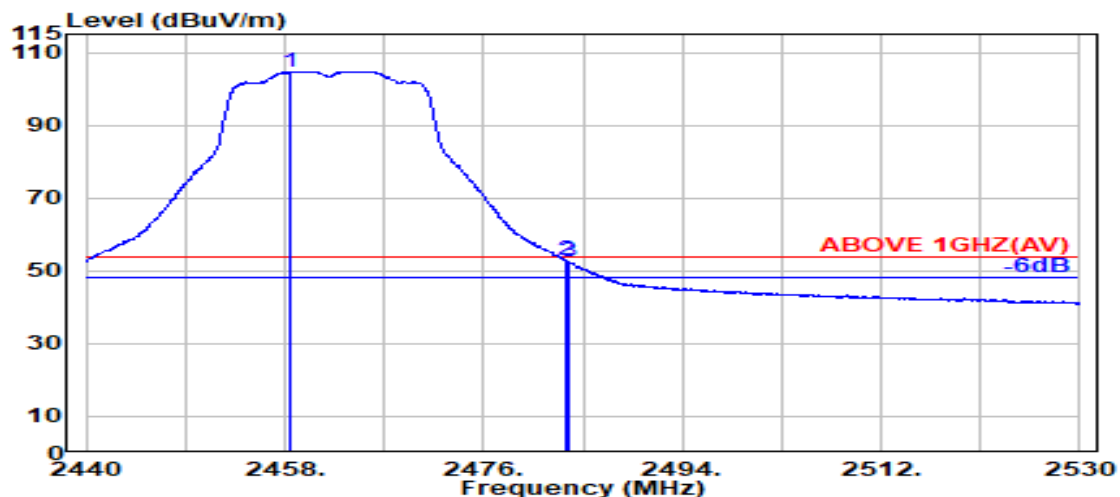

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.32	5.80	39.87	110.51	104.76	---	---	Average
2483.500	28.37	5.83	39.87	58.53	52.85	54.00	1.15	Average
2483.750	28.37	5.83	39.87	57.99	52.32	54.00	1.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

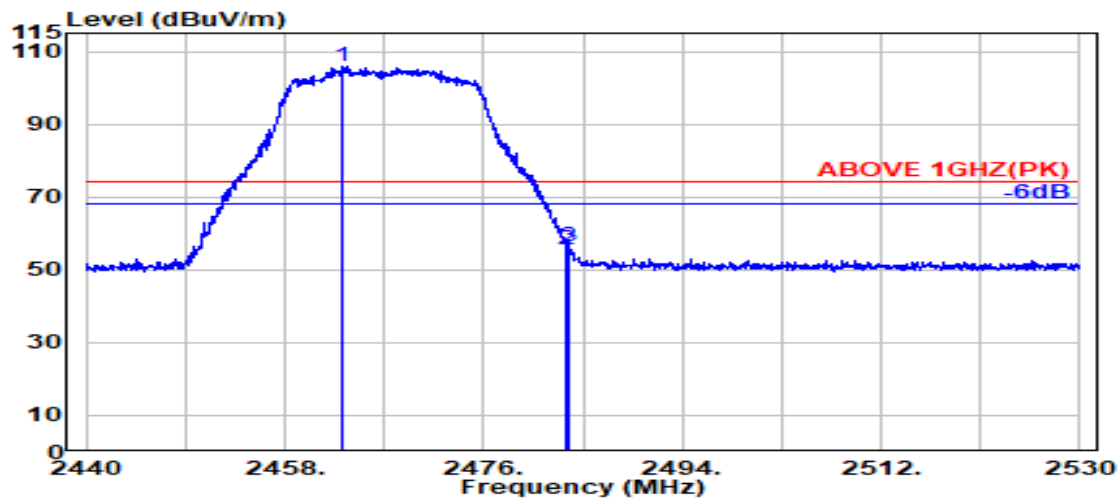

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.33	5.81	39.87	111.66	105.92	---	---	Peak
2483.500	28.37	5.83	39.87	61.42	55.75	74.00	18.25	Peak
2483.700	28.37	5.83	39.87	61.89	56.22	74.00	17.78	Peak

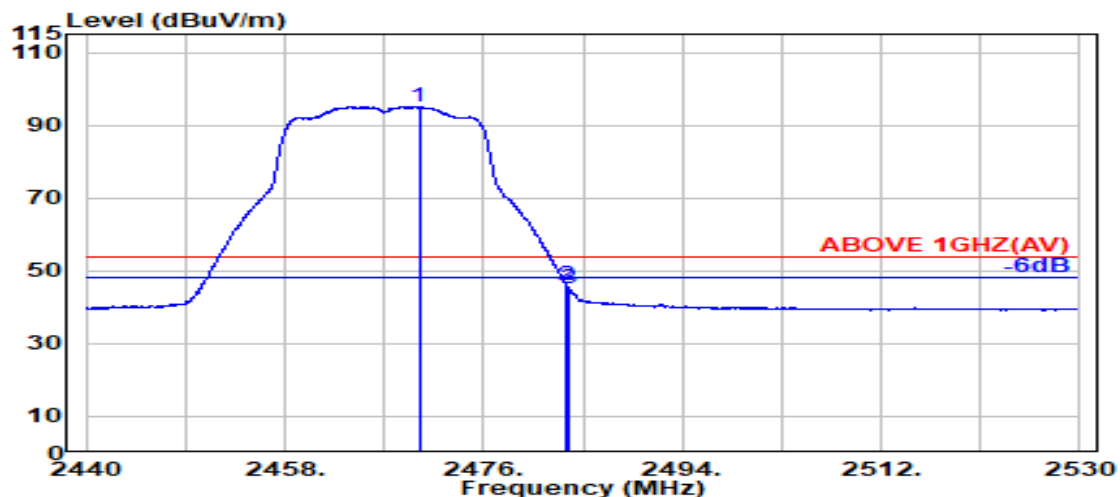

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.150	28.34	5.82	39.87	100.78	95.07	---	---	Average
2483.500	28.37	5.83	39.87	51.88	46.21	54.00	7.79	Average
2483.700	28.37	5.83	39.87	50.82	45.14	54.00	8.86	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

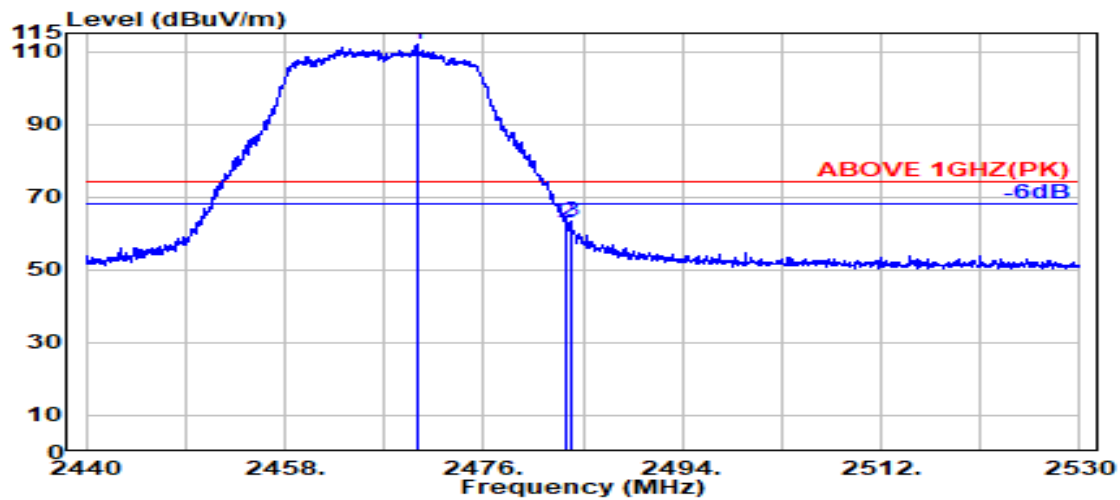

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.950	28.34	5.82	39.87	117.59	111.87	---	---	Peak
2483.500	28.37	5.83	39.87	68.44	62.77	74.00	11.23	Peak
2483.950	28.37	5.83	39.87	69.20	63.53	74.00	10.47	Peak

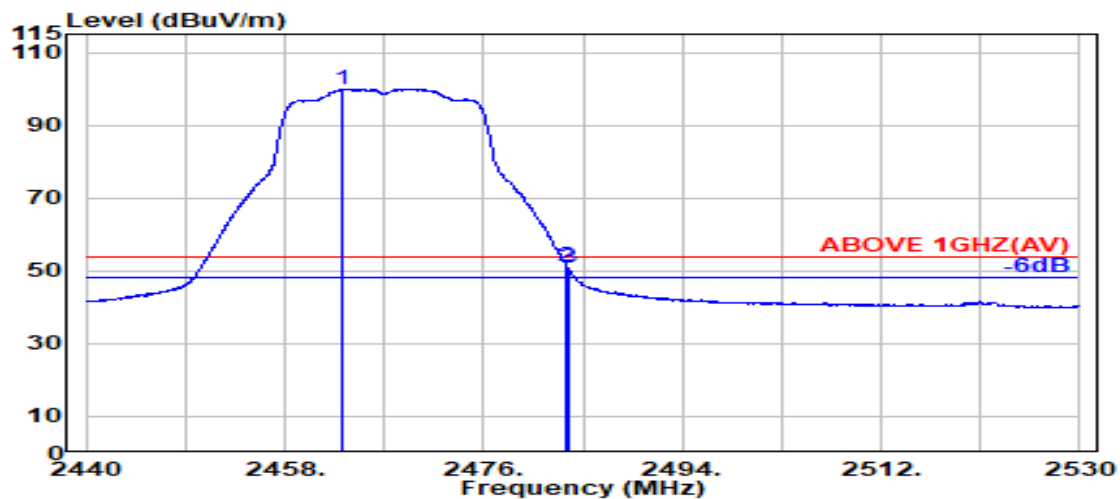

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.33	5.81	39.87	105.67	99.93	---	---	Average
2483.500	28.37	5.83	39.87	56.92	51.25	54.00	2.75	Average
2483.700	28.37	5.83	39.87	56.25	50.58	54.00	3.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

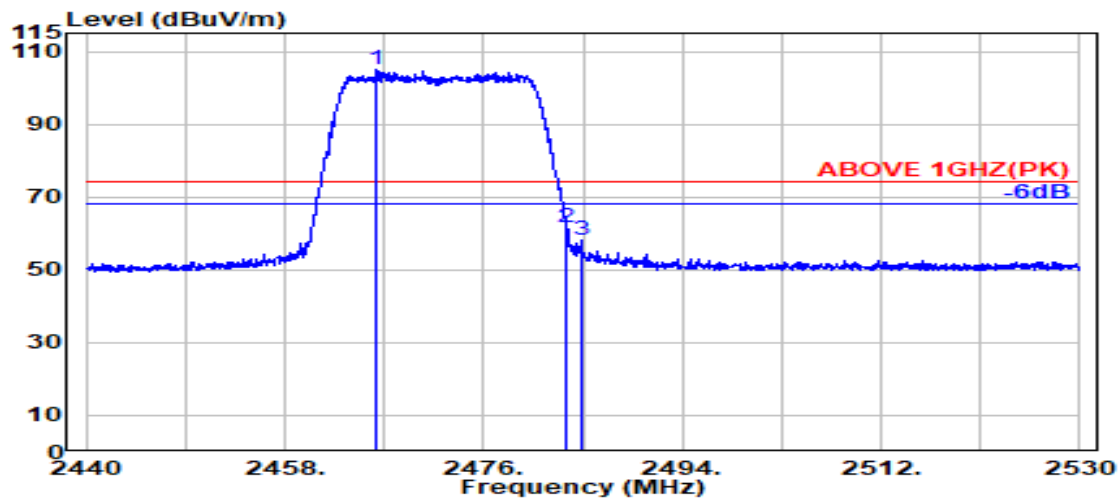

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.350	28.33	5.81	39.87	110.73	105.00	---	---	Peak
2483.500	28.37	5.83	39.87	67.50	61.83	74.00	12.17	Peak
2484.800	28.37	5.83	39.87	63.74	58.07	74.00	15.93	Peak

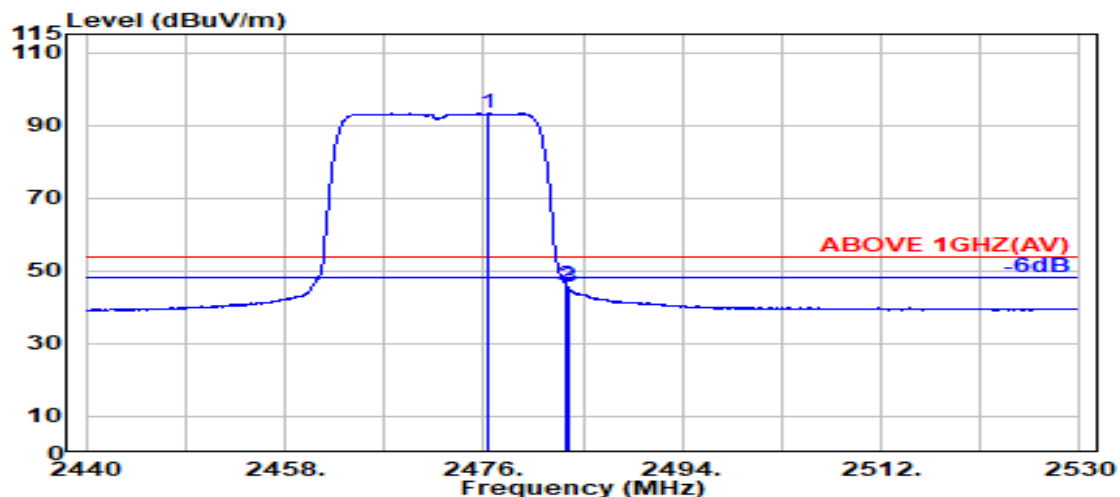

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.400	28.35	5.82	39.87	98.93	93.23	---	---	Average
2483.500	28.37	5.83	39.87	51.76	46.09	54.00	7.91	Average
2483.700	28.37	5.83	39.87	51.04	45.37	54.00	8.63	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

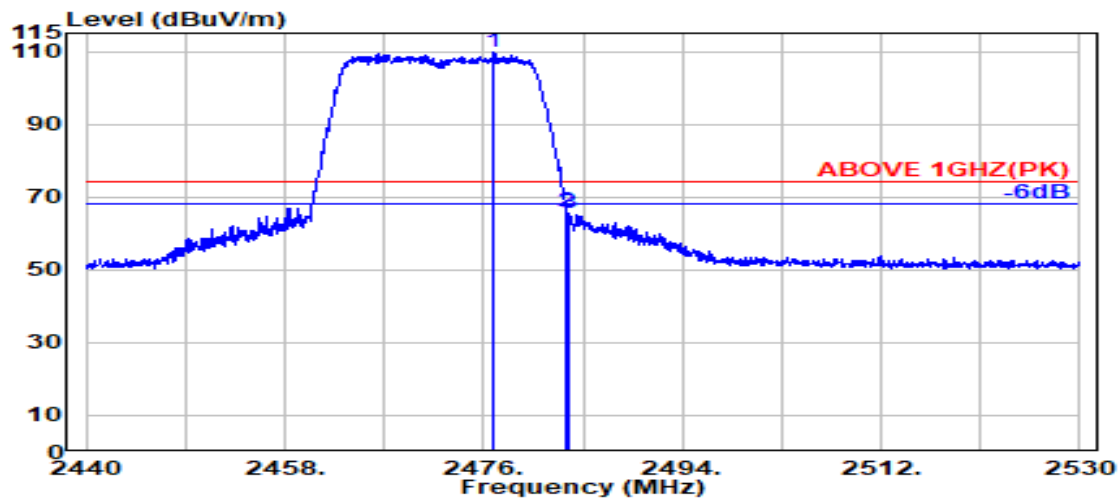

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.850	28.35	5.82	39.87	115.41	109.72	---	---	Peak
2483.500	28.37	5.83	39.87	71.44	65.77	74.00	8.23	Peak
2483.750	28.37	5.83	39.87	71.17	65.50	74.00	8.50	Peak

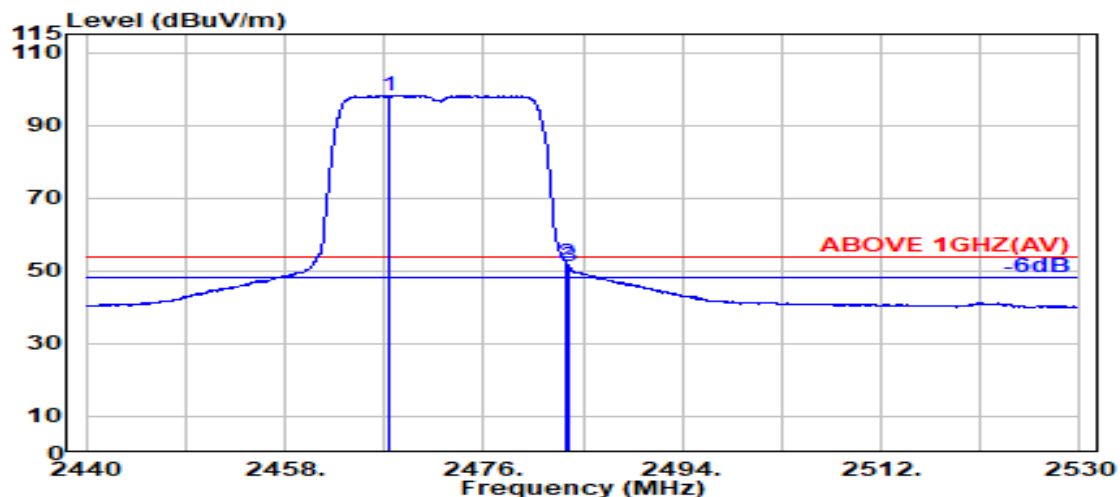

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.350	28.33	5.81	39.87	103.89	98.17	---	---	Average
2483.500	28.37	5.83	39.87	57.55	51.88	54.00	2.12	Average
2483.750	28.37	5.83	39.87	56.76	51.09	54.00	2.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

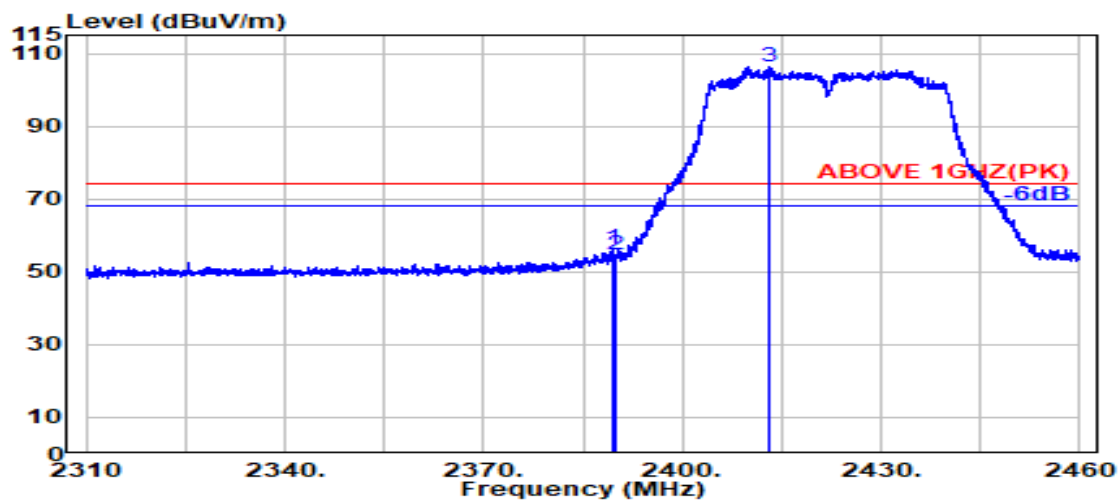

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	62.56	56.54	74.00	17.46	Peak
2389.800	28.14	5.72	39.88	60.77	54.75	74.00	19.25	Peak
@ 2412.950	28.15	5.75	39.88	112.47	106.49	---	---	Peak

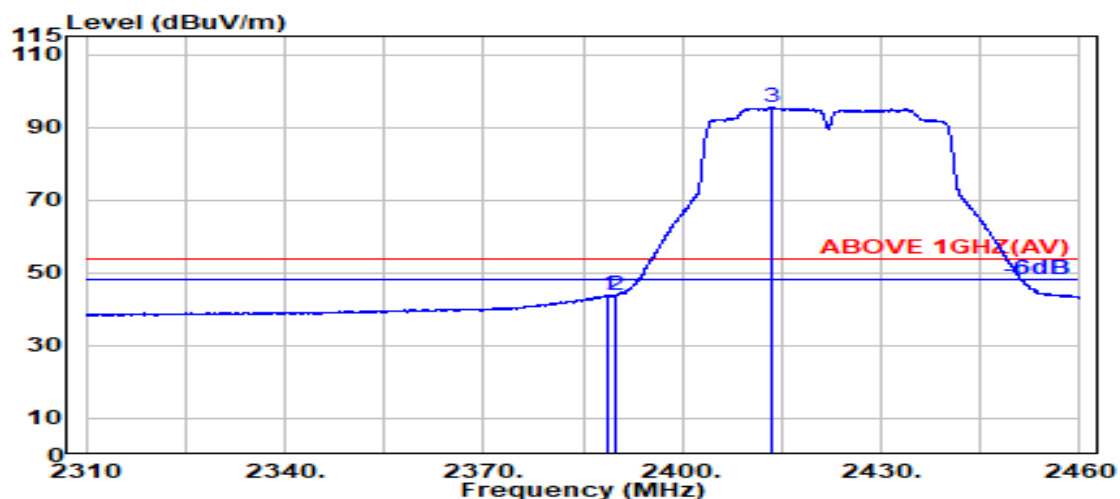

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	49.96	43.94	54.00	10.06	Average
2389.800	28.14	5.72	39.88	49.84	43.82	54.00	10.18	Average
@ 2413.650	28.16	5.75	39.88	101.34	95.37	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

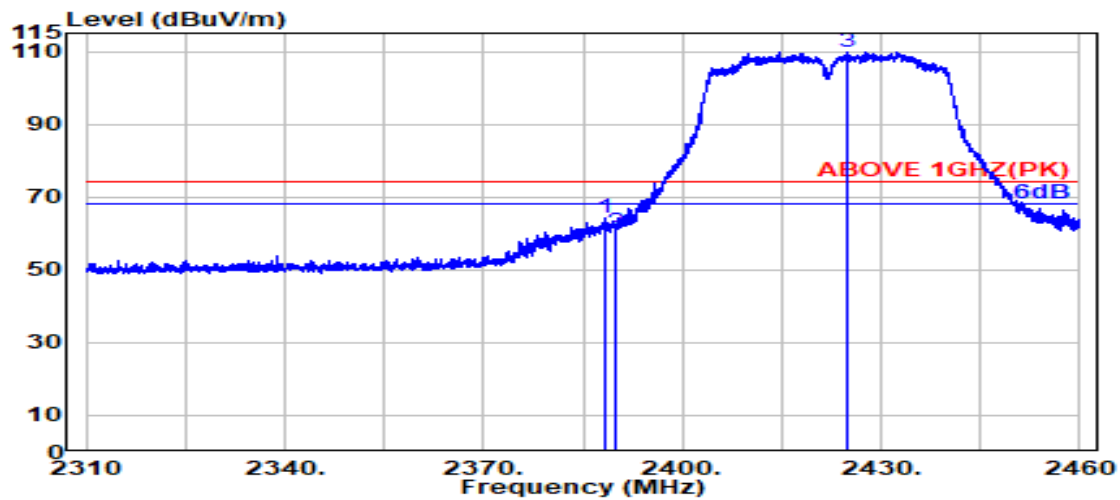

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.88	70.06	64.04	74.00	9.96	Peak
2389.800	28.14	5.72	39.88	66.44	60.42	74.00	13.58	Peak
@ 2425.000	28.20	5.76	39.88	115.87	109.96	---	---	Peak

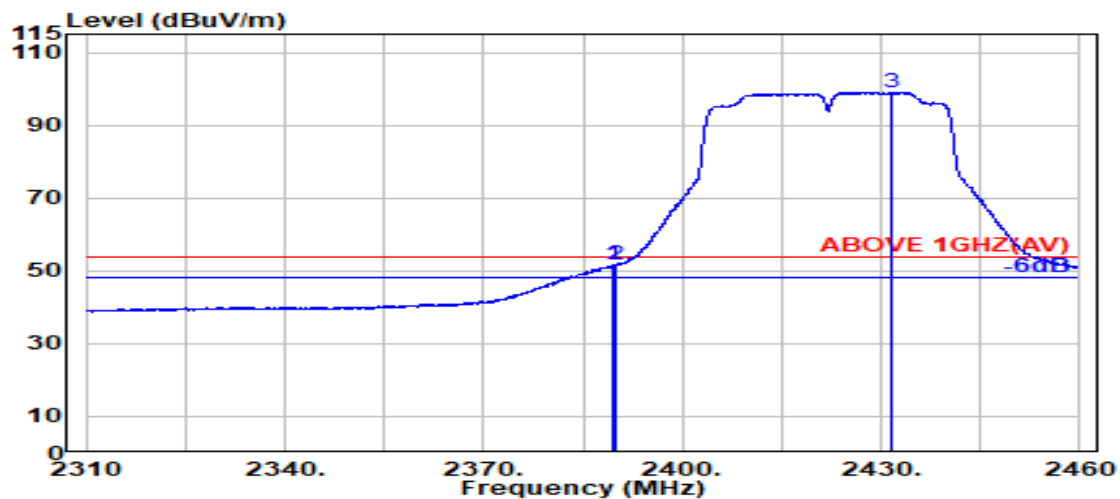


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	57.46	51.45	54.00	2.55	Average
2389.800	28.14	5.72	39.88	57.52	51.50	54.00	2.50	Average
@ 2431.500	28.23	5.77	39.87	105.03	99.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

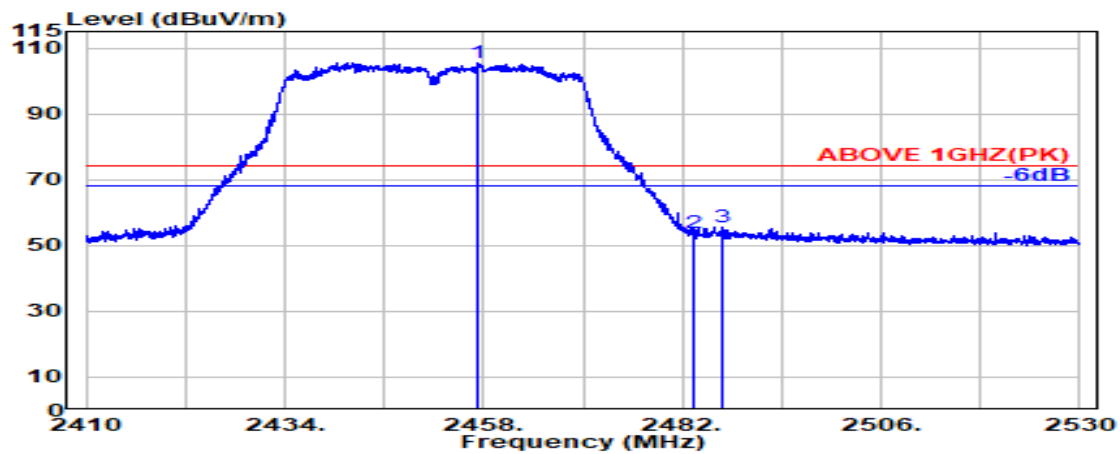

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2457.300	28.31	5.80	39.87	111.28	105.52	---	---	Peak
2483.500	28.37	5.83	39.87	59.29	53.62	74.00	20.38	Peak
2486.700	28.37	5.83	39.87	61.19	55.53	74.00	18.47	Peak

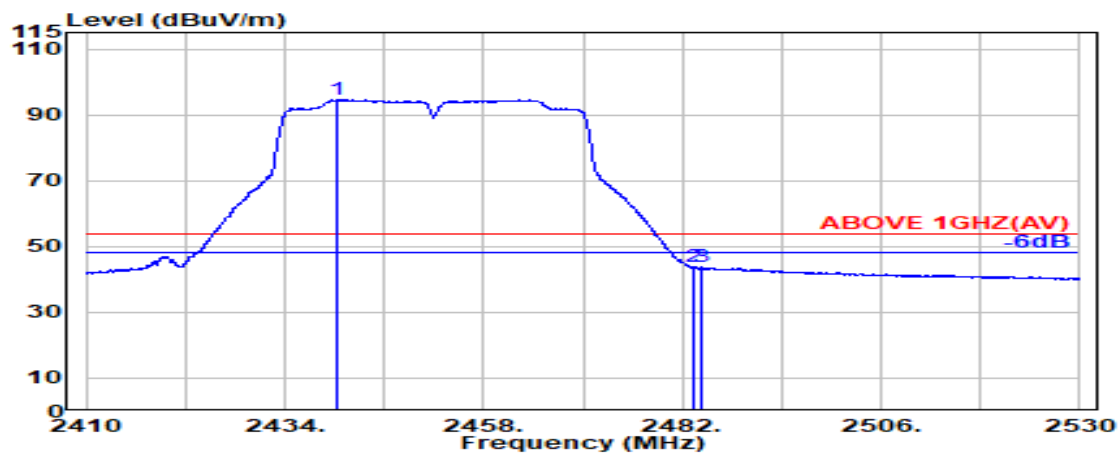

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.300	28.26	5.78	39.87	100.51	94.68	---	---	Average
2483.500	28.37	5.83	39.87	49.36	43.68	54.00	10.32	Average
2484.250	28.37	5.83	39.87	49.31	43.64	54.00	10.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

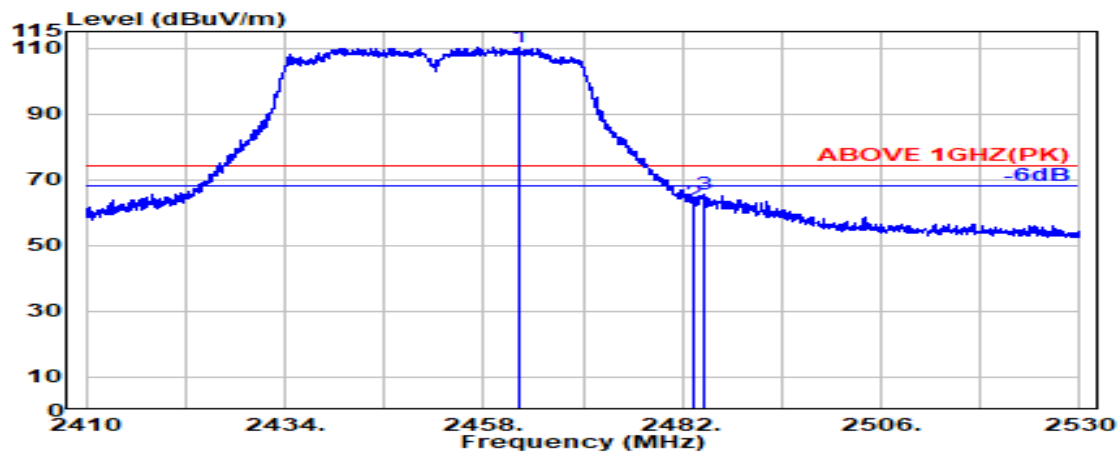

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.200	28.32	5.81	39.87	116.00	110.25	---	---	Peak
2483.500	28.37	5.83	39.87	68.49	62.82	74.00	11.18	Peak
2484.700	28.37	5.83	39.87	71.08	65.41	74.00	8.59	Peak

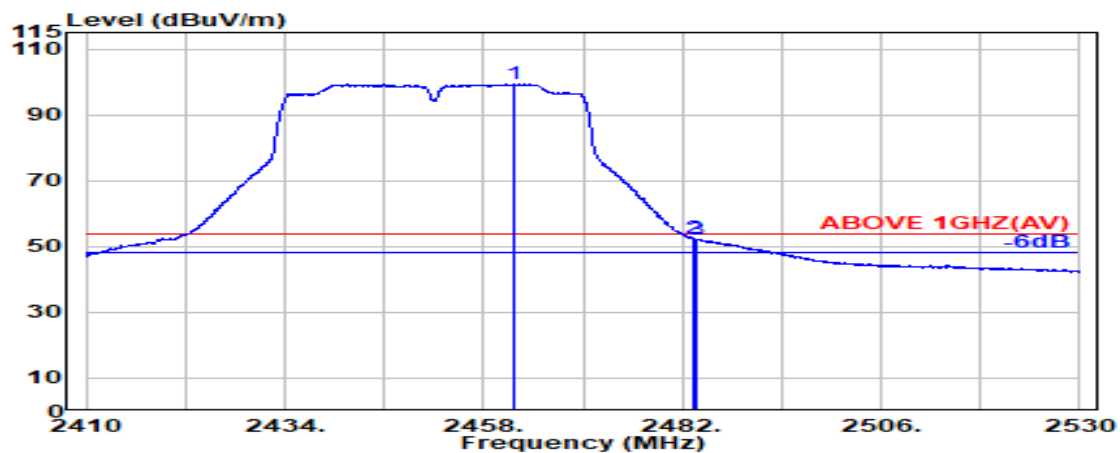

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.650	28.32	5.81	39.87	105.02	99.28	---	---	Average
2483.500	28.37	5.83	39.87	57.97	52.30	54.00	1.70	Average
2483.800	28.37	5.83	39.87	57.89	52.21	54.00	1.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

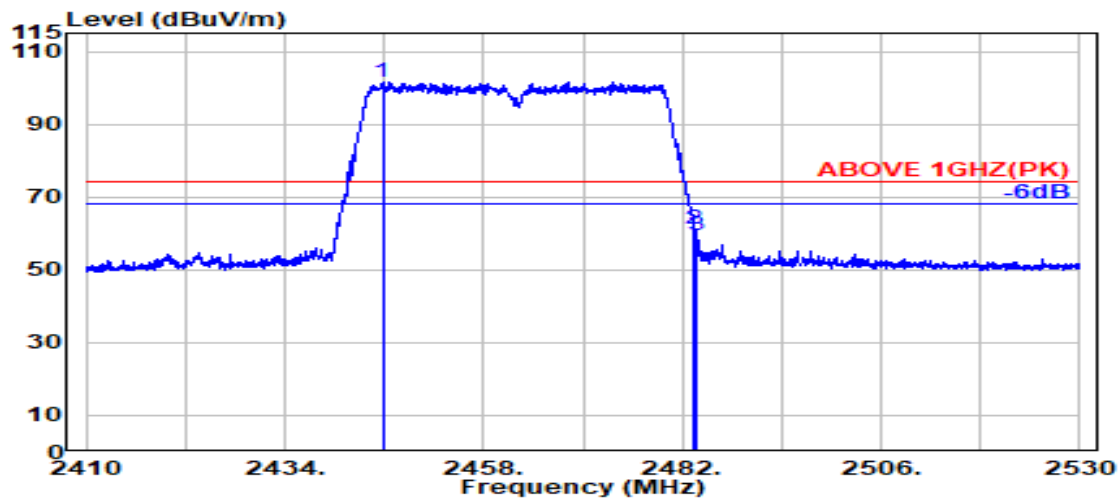

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.800	28.28	5.79	39.87	107.45	101.64	---	---	Peak
2483.500	28.37	5.83	39.87	66.67	61.00	74.00	13.00	Peak
2483.700	28.37	5.83	39.87	65.24	59.57	74.00	14.43	Peak

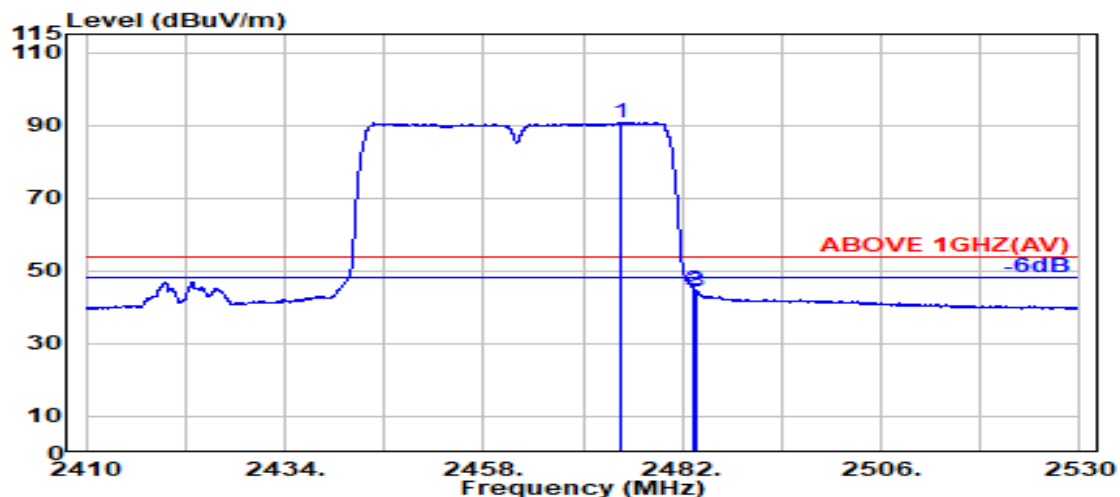

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.500	28.35	5.82	39.87	96.47	90.77	---	---	Average
2483.500	28.37	5.83	39.87	50.42	44.74	54.00	9.26	Average
2483.800	28.37	5.83	39.87	49.98	44.31	54.00	9.69	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

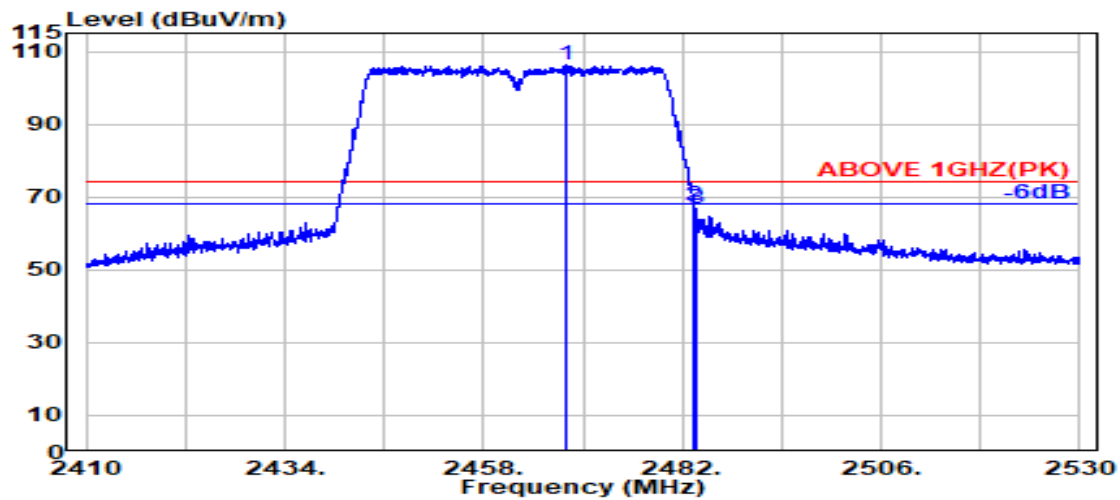

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.950	28.34	5.81	39.87	111.94	106.21	---	---	Peak
2483.500	28.37	5.83	39.87	73.27	67.60	74.00	6.40	Peak
2483.700	28.37	5.83	39.87	72.58	66.91	74.00	7.09	Peak

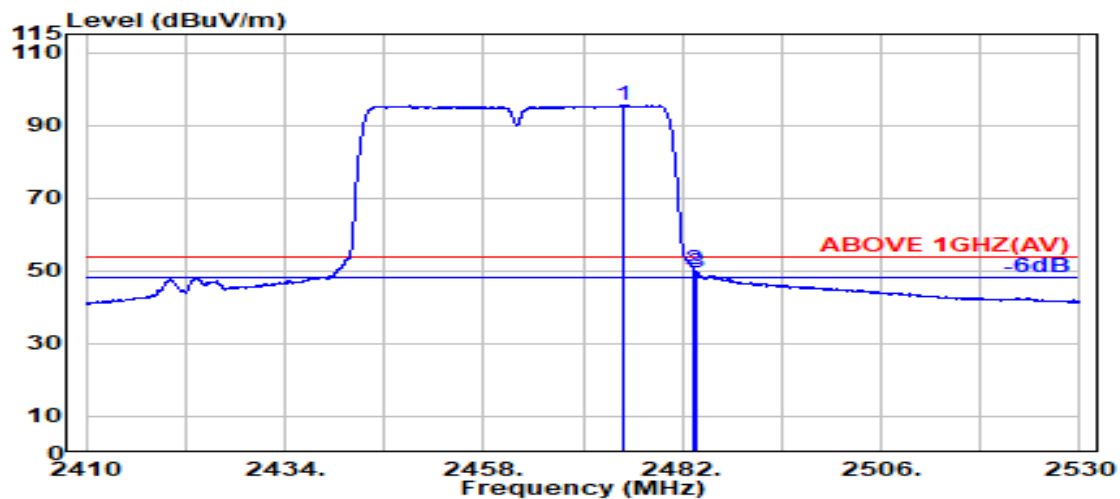

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.850	28.35	5.82	39.87	101.14	95.43	---	---	Average
2483.500	28.37	5.83	39.87	55.98	50.30	54.00	3.70	Average
2483.700	28.37	5.83	39.87	55.33	49.66	54.00	4.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

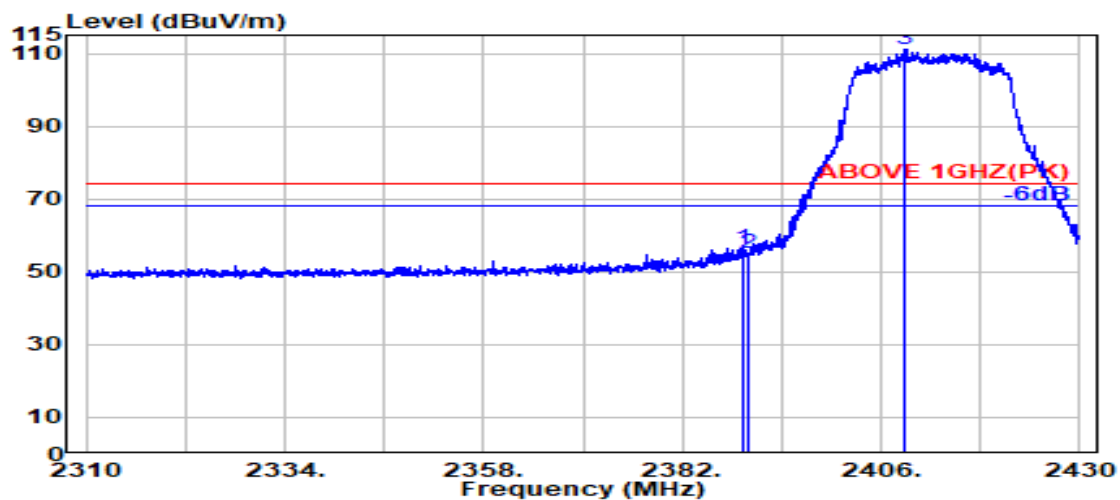

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	62.61	56.60	74.00	17.40	Peak
2390.000	28.14	5.72	39.88	61.09	55.07	74.00	18.93	Peak
@ 2408.750	28.14	5.74	39.88	117.30	111.31	---	---	Peak

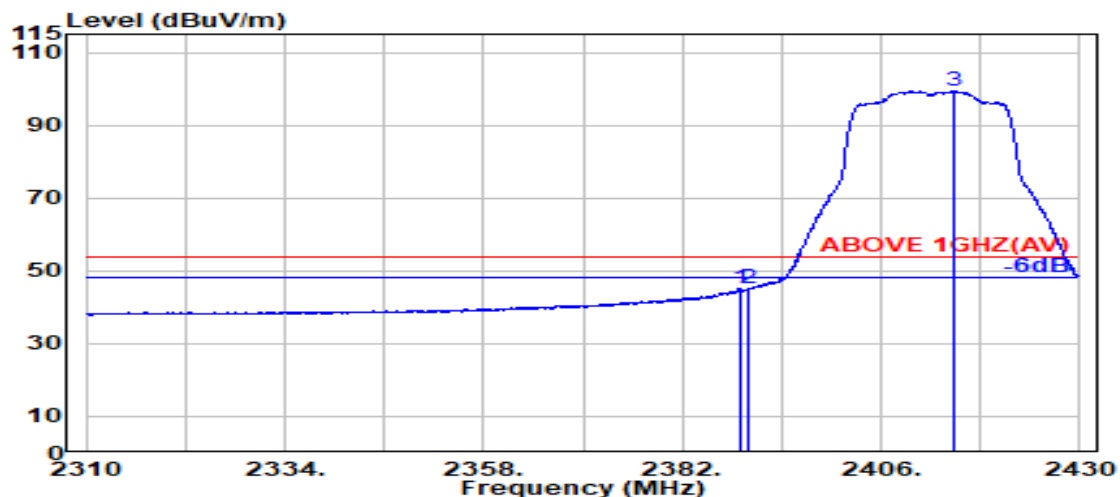

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.88	50.98	44.97	54.00	9.03	Average
2390.000	28.14	5.72	39.88	51.00	44.99	54.00	9.01	Average
@ 2414.800	28.16	5.75	39.88	105.31	99.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

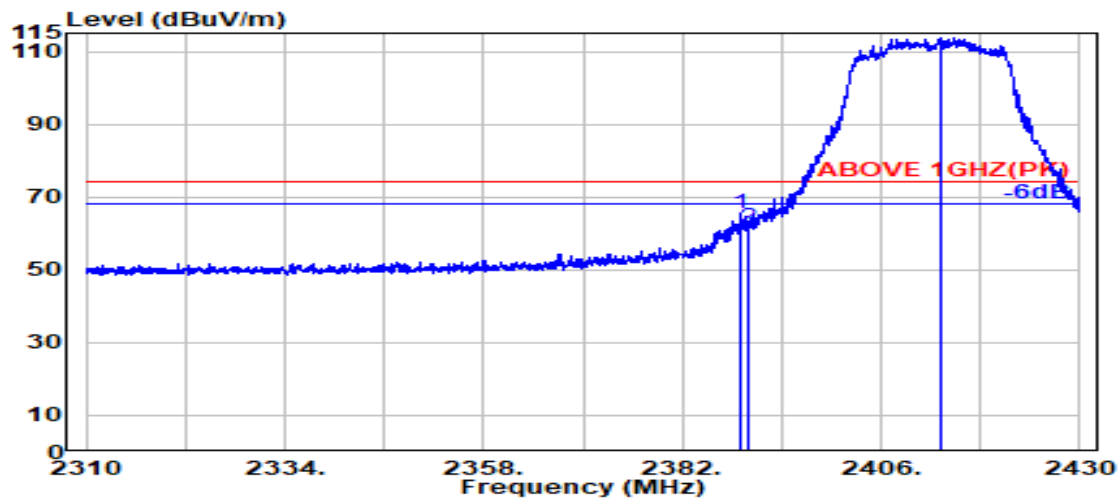

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	71.47	65.46	74.00	8.54	Peak
2390.000	28.14	5.72	39.88	67.62	61.60	74.00	12.40	Peak
@ 2413.300	28.15	5.75	39.88	119.49	113.52	---	---	Peak

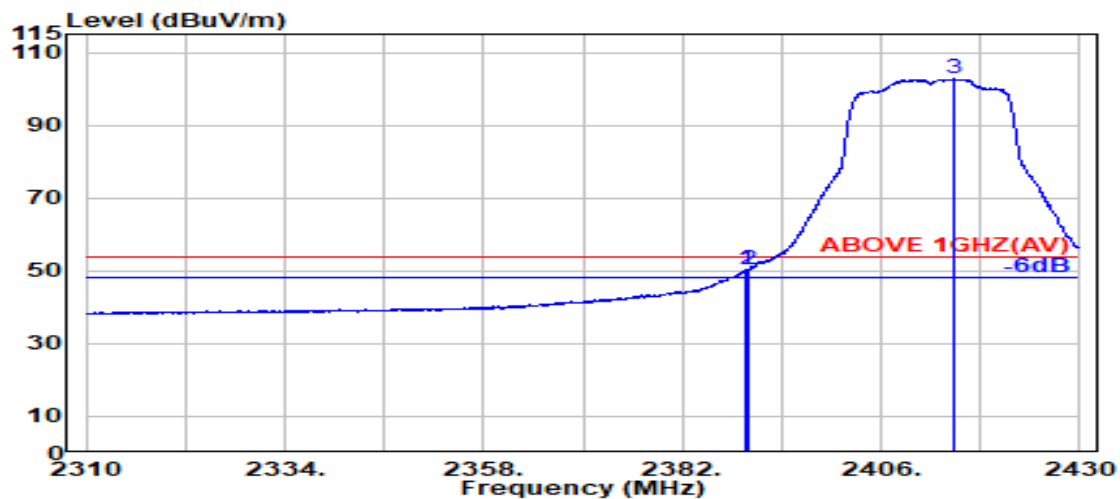

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	56.16	50.15	54.00	3.85	Average
2390.000	28.14	5.72	39.88	56.44	50.42	54.00	3.58	Average
@ 2414.950	28.16	5.75	39.88	108.60	102.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

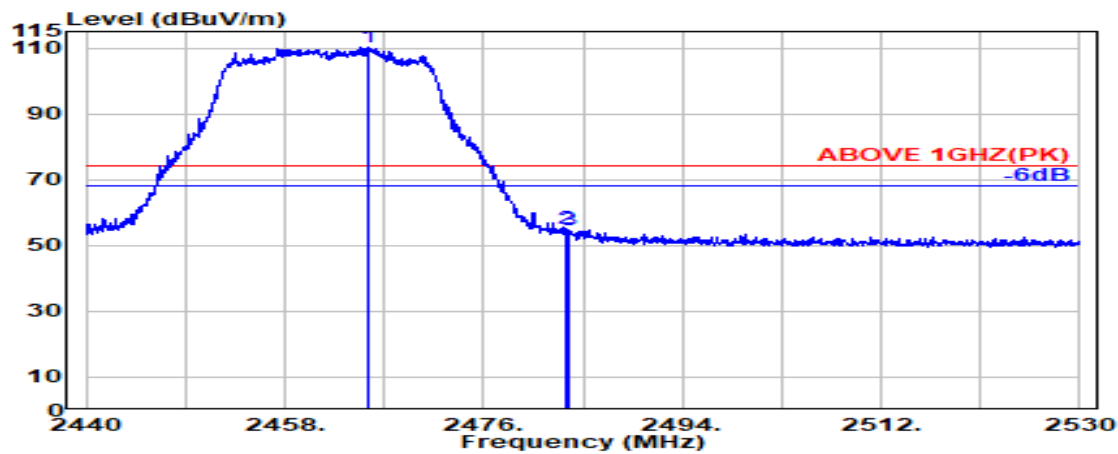

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.650	28.33	5.81	39.87	116.12	110.39	---	---	Peak
2483.500	28.37	5.83	39.87	60.79	55.12	74.00	18.88	Peak
2483.750	28.37	5.83	39.87	60.55	54.88	74.00	19.12	Peak

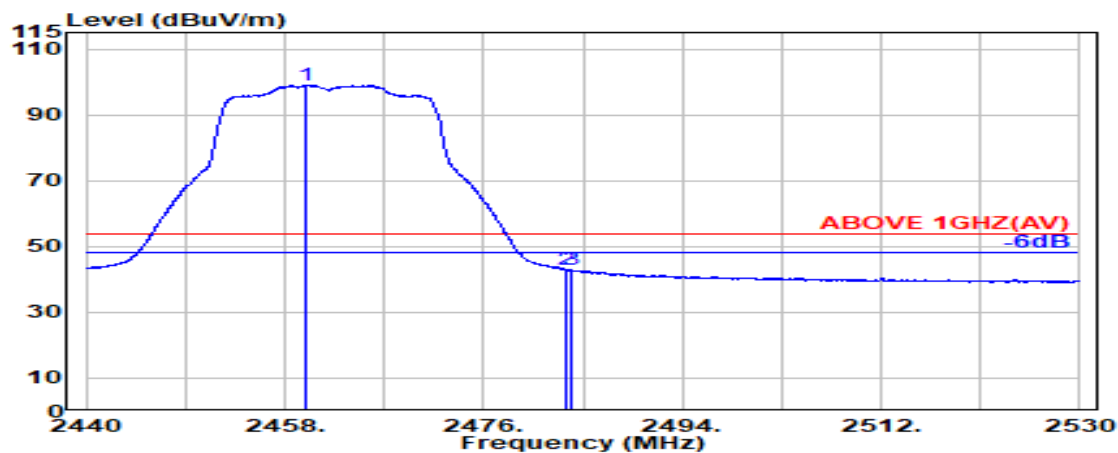


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	28.32	5.80	39.87	104.72	98.97	---	---	Average
2483.500	28.37	5.83	39.87	48.62	42.95	54.00	11.05	Average
2484.050	28.37	5.83	39.87	48.48	42.81	54.00	11.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

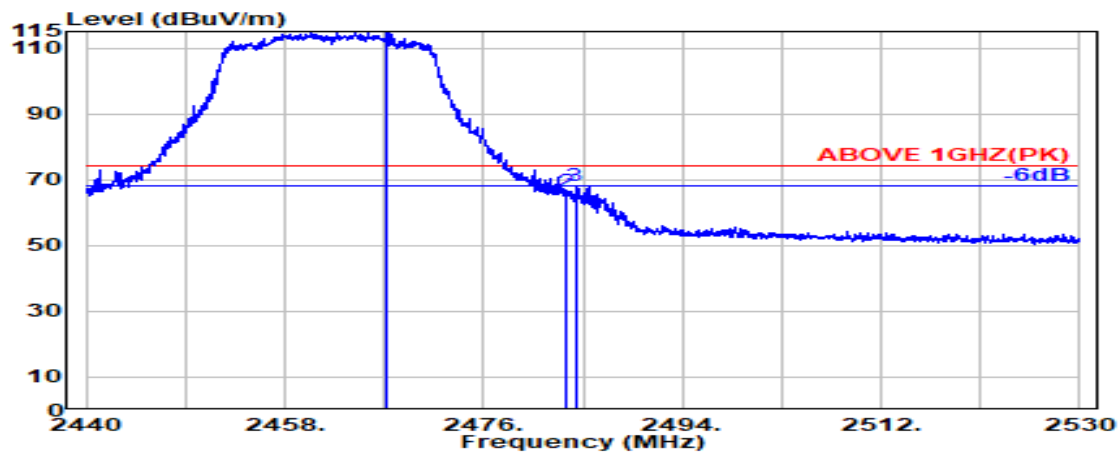

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.200	28.33	5.81	39.87	120.49	114.77	---	---	Peak
2483.500	28.37	5.83	39.87	71.92	66.25	74.00	7.75	Peak
2484.300	28.37	5.83	39.87	73.83	68.16	74.00	5.84	Peak

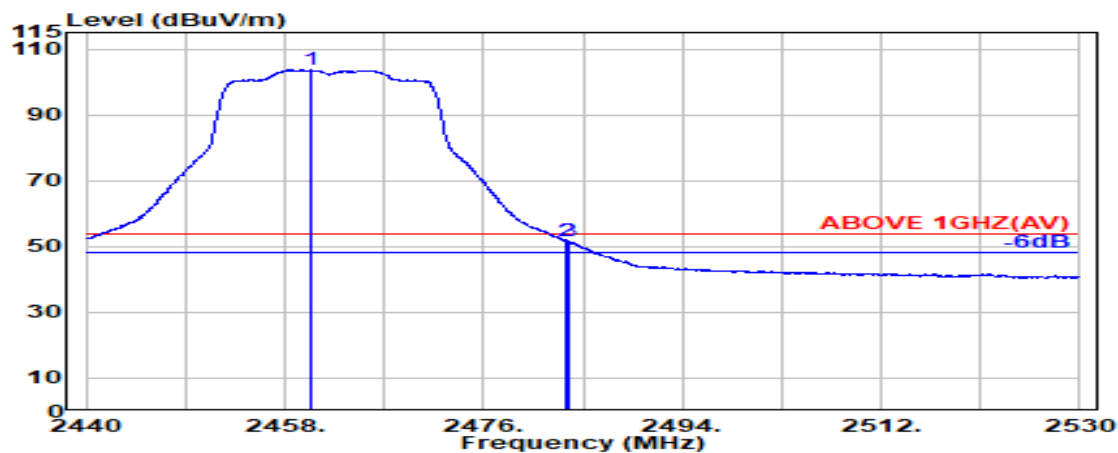


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	28.32	5.80	39.87	109.42	103.67	---	---	Average
2483.500	28.37	5.83	39.87	57.50	51.83	54.00	2.17	Average
2483.750	28.37	5.83	39.87	57.34	51.66	54.00	2.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

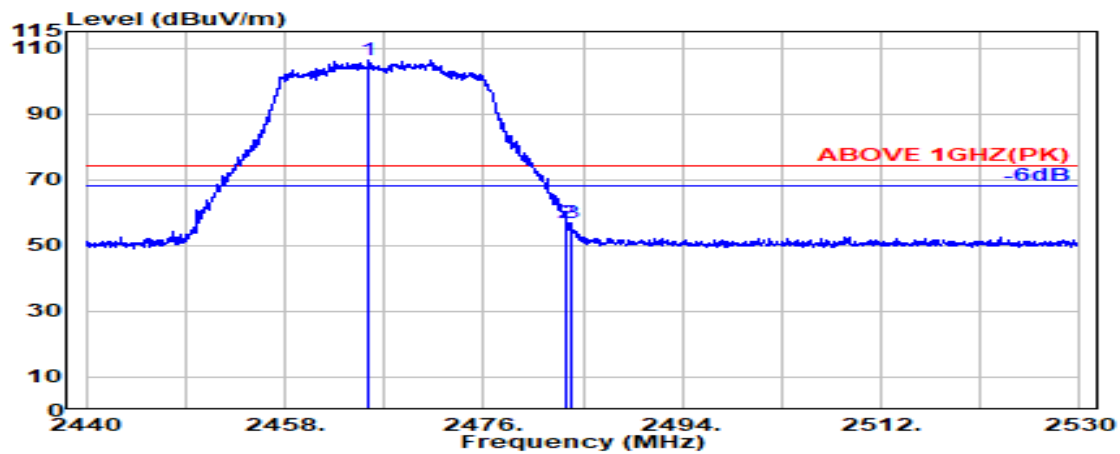

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.600	28.33	5.81	39.87	111.89	106.16	---	---	Peak
2483.500	28.37	5.83	39.87	62.42	56.75	74.00	17.25	Peak
2483.850	28.37	5.83	39.87	62.59	56.92	74.00	17.08	Peak

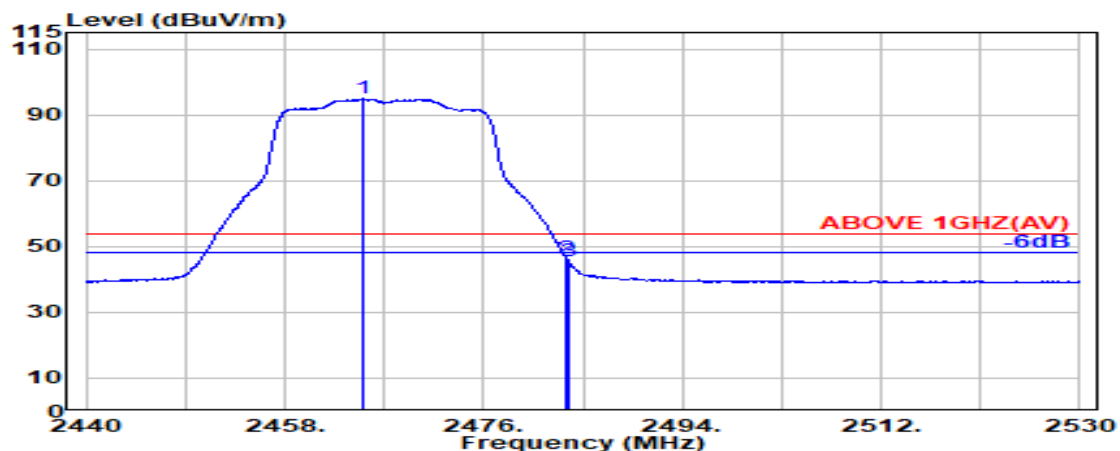

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	28.33	5.81	39.87	100.67	94.94	---	---	Average
2483.500	28.37	5.83	39.87	52.27	46.59	54.00	7.41	Average
2483.700	28.37	5.83	39.87	51.30	45.63	54.00	8.37	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

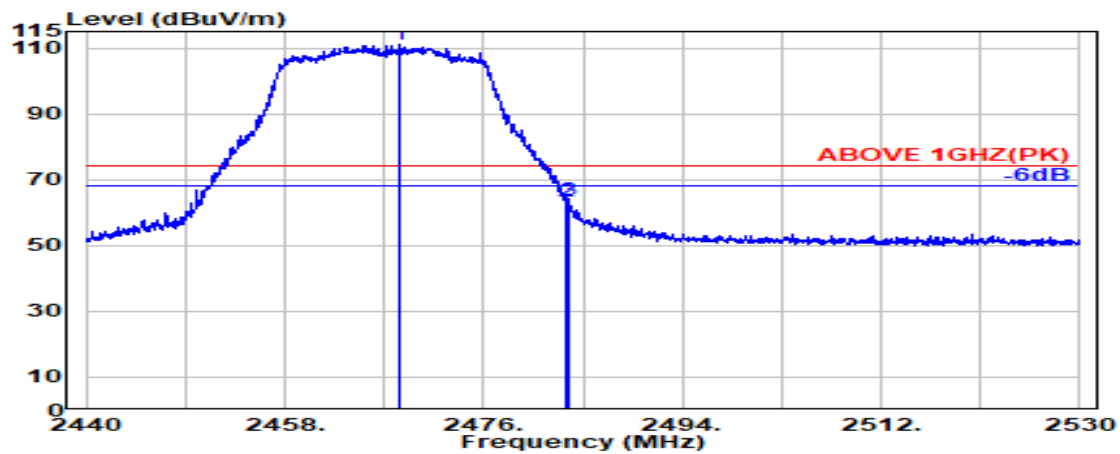

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.350	28.34	5.81	39.87	116.61	110.89	---	---	Peak
2483.500	28.37	5.83	39.87	68.99	63.32	74.00	10.68	Peak
2483.700	28.37	5.83	39.87	69.37	63.69	74.00	10.31	Peak

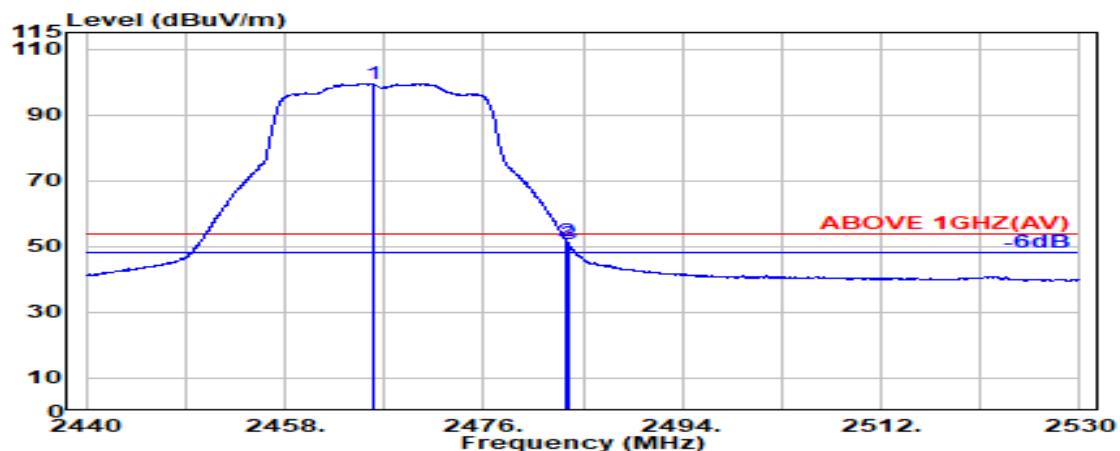

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.950	28.33	5.81	39.87	105.31	99.58	---	---	Average
2483.500	28.37	5.83	39.87	57.34	51.67	54.00	2.33	Average
2483.700	28.37	5.83	39.87	56.39	50.72	54.00	3.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

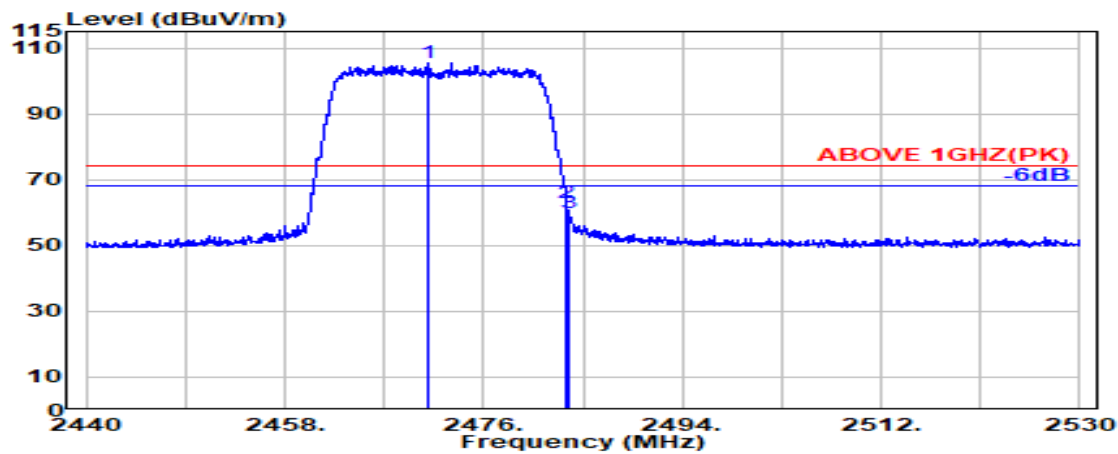

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.34	5.82	39.87	111.05	105.34	---	---	Peak
2483.500	28.37	5.83	39.87	68.80	63.12	74.00	10.88	Peak
2483.700	28.37	5.83	39.87	65.74	60.07	74.00	13.93	Peak

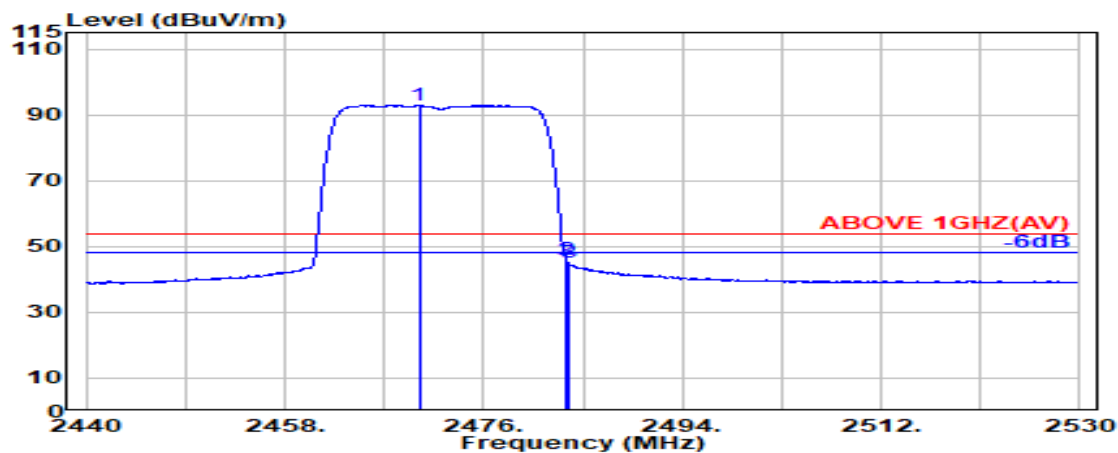


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.150	28.34	5.82	39.87	98.73	93.01	---	---	Average
2483.500	28.37	5.83	39.87	51.66	45.98	54.00	8.02	Average
2483.700	28.37	5.83	39.87	50.67	45.00	54.00	9.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

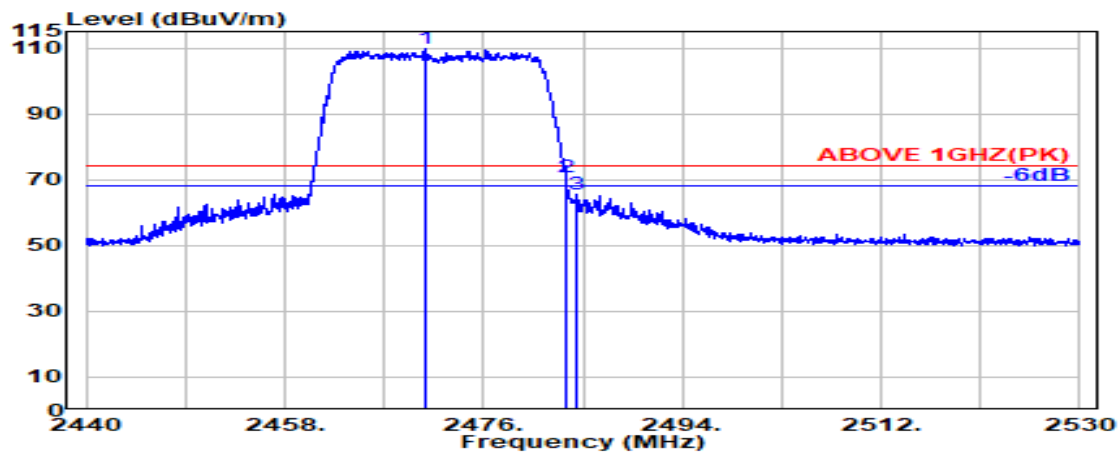

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.34	5.82	39.87	115.40	109.69	---	---	Peak
2483.500	28.37	5.83	39.87	76.53	70.86	74.00	3.14	Peak
2484.450	28.37	5.83	39.87	71.10	65.43	74.00	8.57	Peak

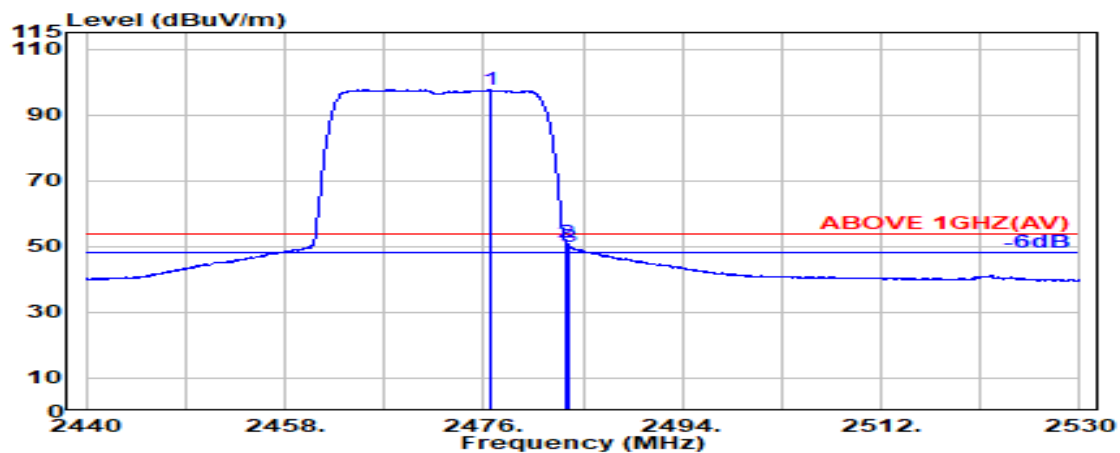

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	28.35	5.82	39.87	103.37	97.68	---	---	Average
2483.500	28.37	5.83	39.87	56.89	51.22	54.00	2.78	Average
2483.700	28.37	5.83	39.87	55.77	50.09	54.00	3.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

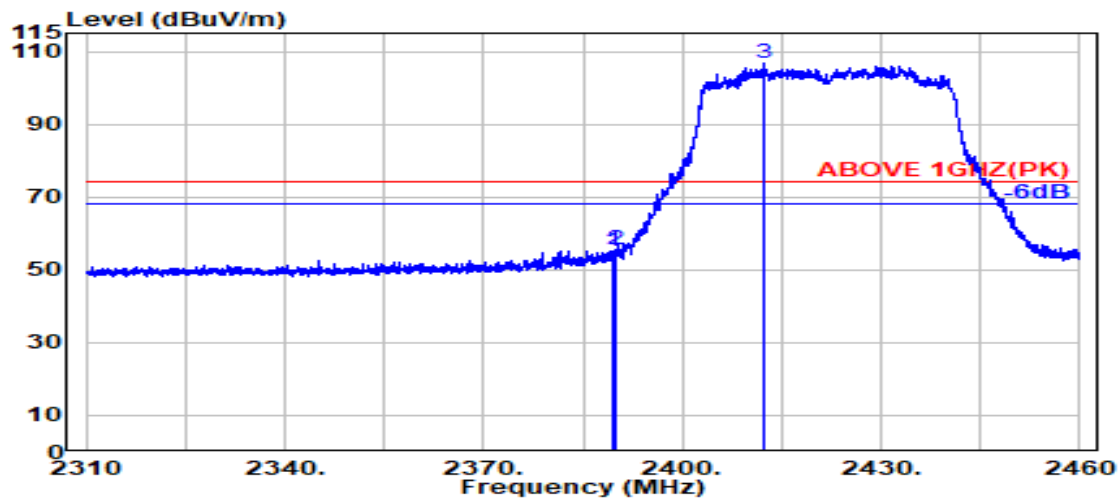

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	61.24	55.22	74.00	18.78	Peak
2389.800	28.14	5.72	39.88	61.35	55.34	74.00	18.66	Peak
@ 2412.400	28.15	5.75	39.88	112.67	106.69	---	---	Peak

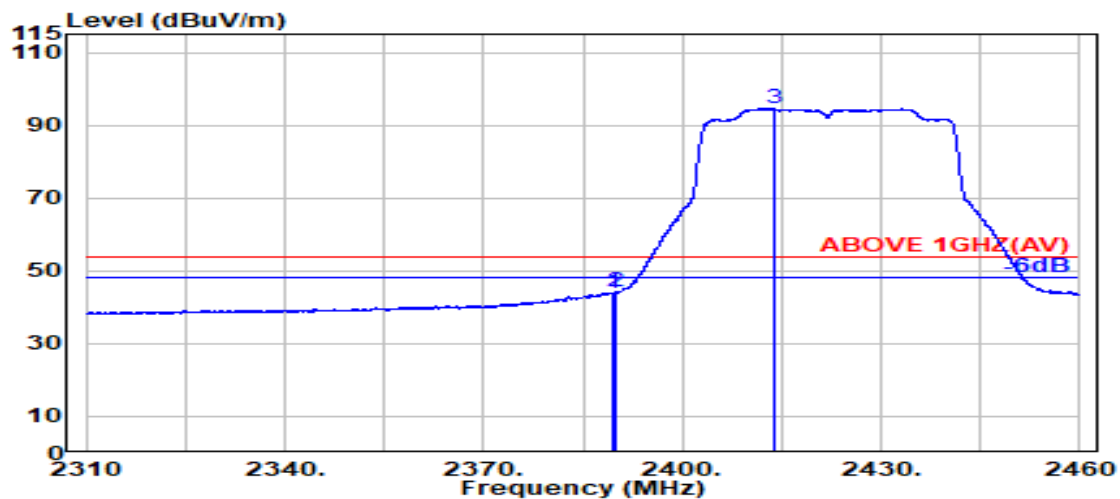

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	49.99	43.97	54.00	10.03	Average
2389.800	28.14	5.72	39.88	50.28	44.26	54.00	9.74	Average
@ 2413.750	28.16	5.75	39.88	100.62	94.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

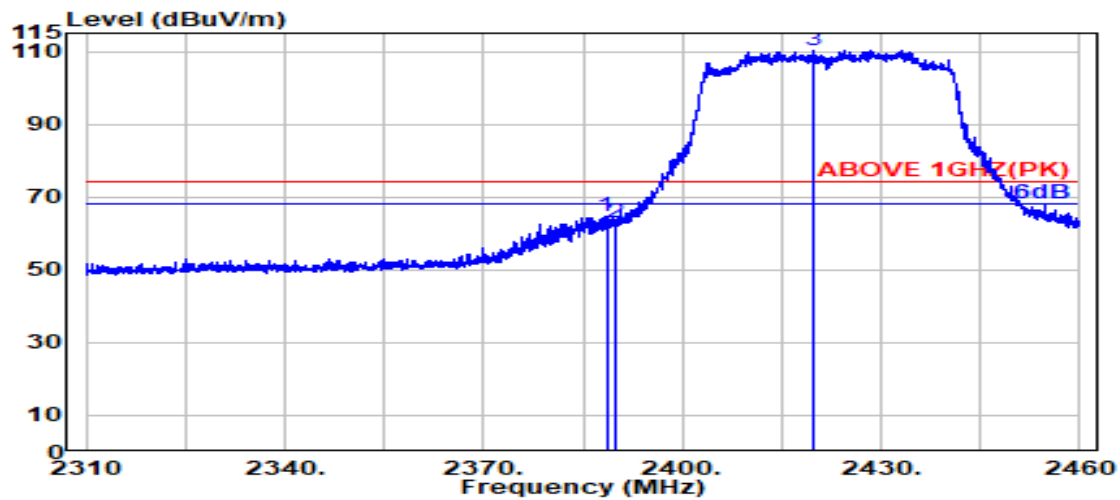

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.15	5.72	39.88	70.62	64.60	74.00	9.40	Peak
2389.800	28.14	5.72	39.88	69.15	63.14	74.00	10.86	Peak
@ 2419.800	28.18	5.76	39.88	116.18	110.24	---	---	Peak

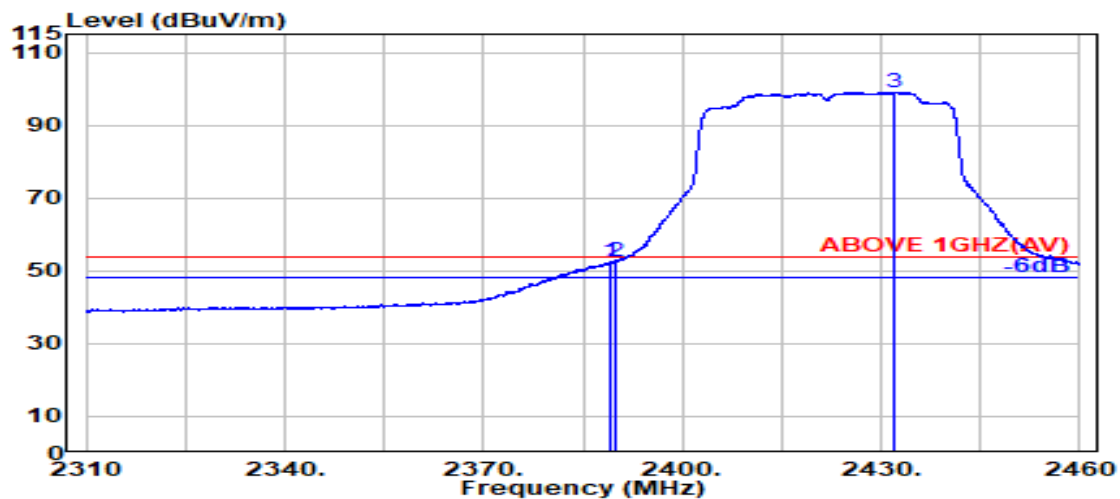


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	58.64	52.63	54.00	1.37	Average
2389.800	28.14	5.72	39.88	58.57	52.55	54.00	1.45	Average
@ 2432.100	28.23	5.77	39.87	105.01	99.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

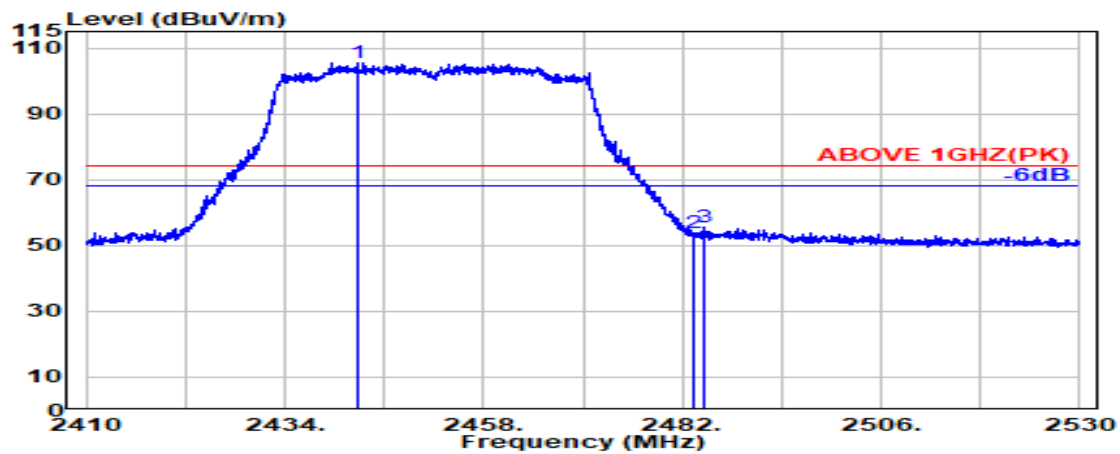

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2442.850	28.27	5.78	39.87	111.36	105.54	---	---	Peak
2483.500	28.37	5.83	39.87	59.65	53.98	74.00	20.02	Peak
2484.650	28.37	5.83	39.87	61.00	55.33	74.00	18.67	Peak

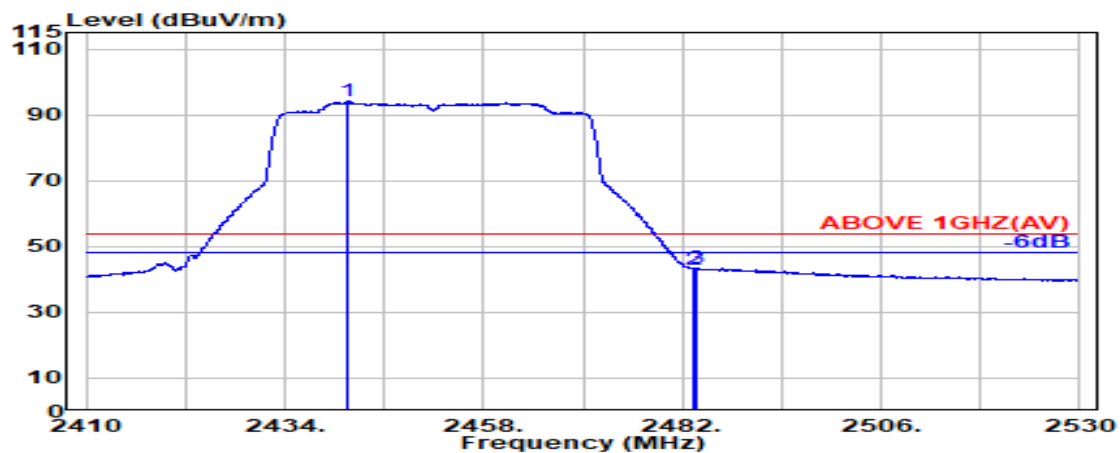


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2441.600	28.27	5.78	39.87	99.87	94.04	---	---	Average
2483.500	28.37	5.83	39.87	48.84	43.17	54.00	10.83	Average
2483.800	28.37	5.83	39.87	48.94	43.27	54.00	10.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

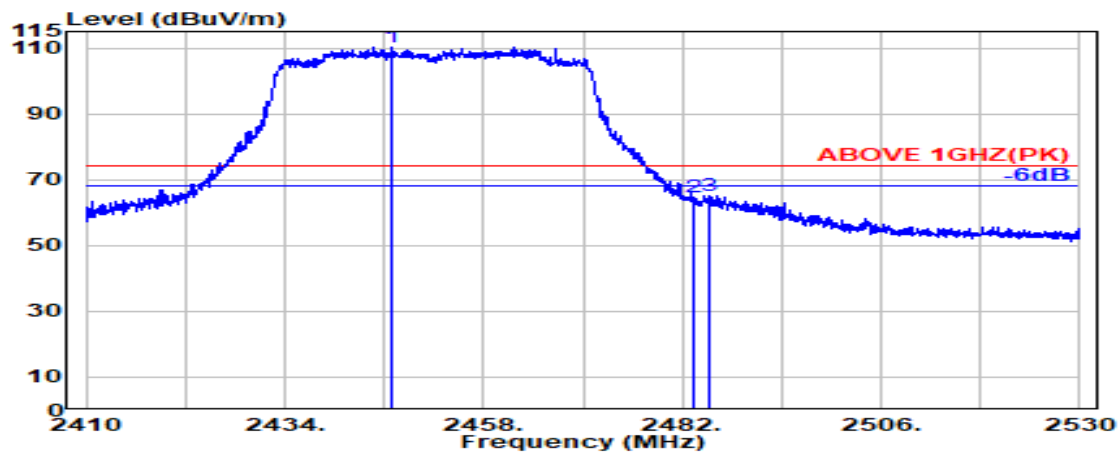

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.050	28.29	5.79	39.87	115.96	110.17	---	---	Peak
2483.500	28.37	5.83	39.87	70.21	64.53	74.00	9.47	Peak
2485.350	28.37	5.83	39.87	70.86	65.19	74.00	8.81	Peak

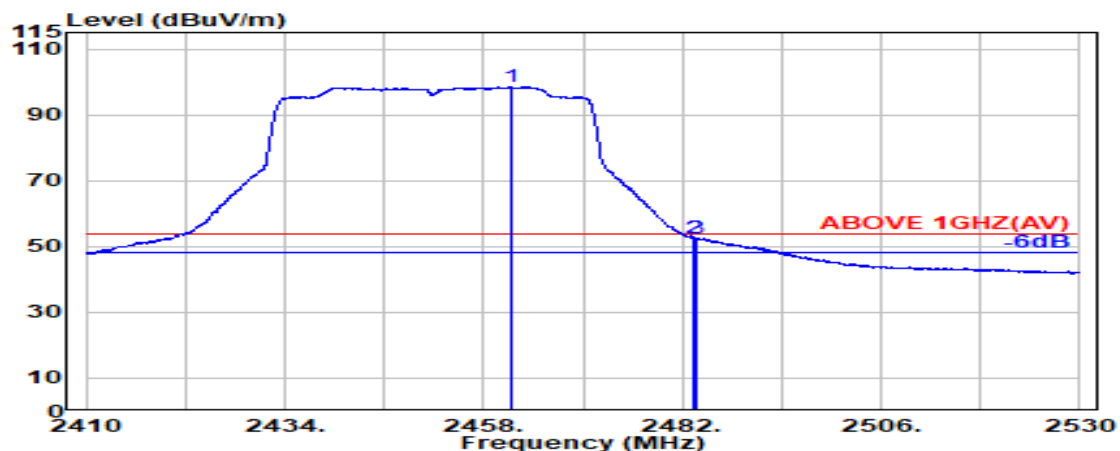

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.32	5.81	39.87	104.09	98.35	---	---	Average
2483.500	28.37	5.83	39.87	58.23	52.56	54.00	1.44	Average
2483.750	28.37	5.83	39.87	58.35	52.67	54.00	1.33	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

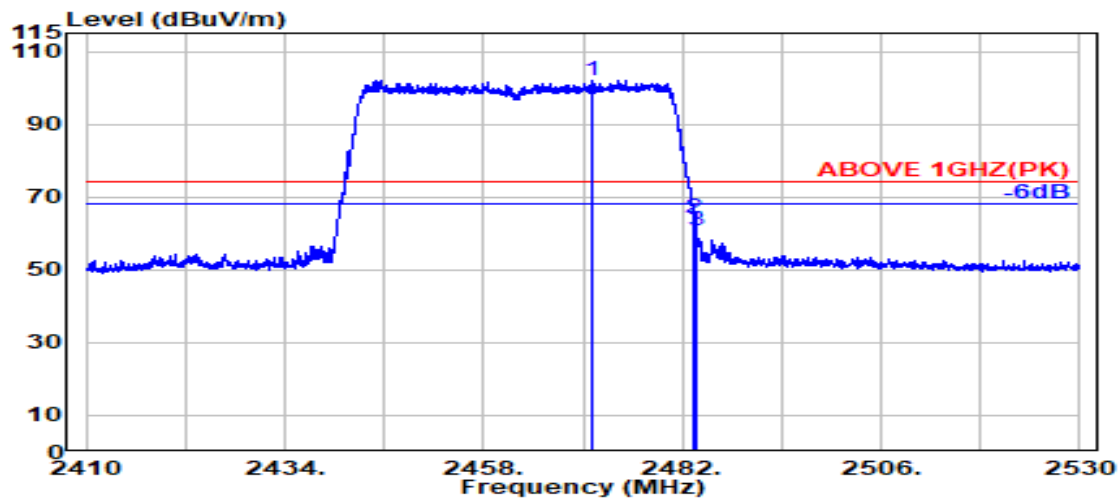

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.34	5.82	39.87	107.84	102.13	---	---	Peak
2483.500	28.37	5.83	39.87	69.95	64.28	74.00	9.72	Peak
2483.700	28.37	5.83	39.87	66.58	60.91	74.00	13.09	Peak

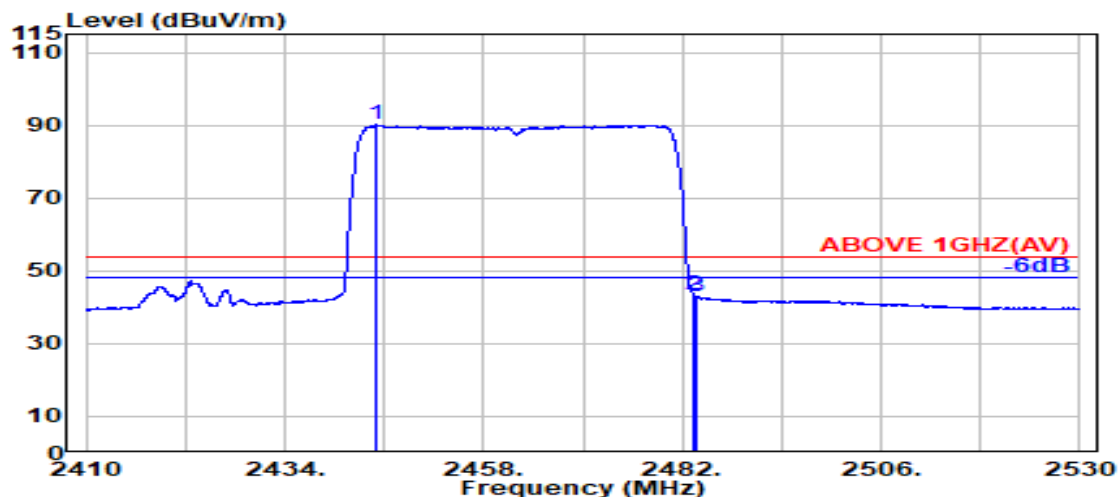

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.050	28.28	5.79	39.87	95.92	90.11	---	---	Average
2483.500	28.37	5.83	39.87	48.92	43.25	54.00	10.75	Average
2483.750	28.37	5.83	39.87	48.63	42.96	54.00	11.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

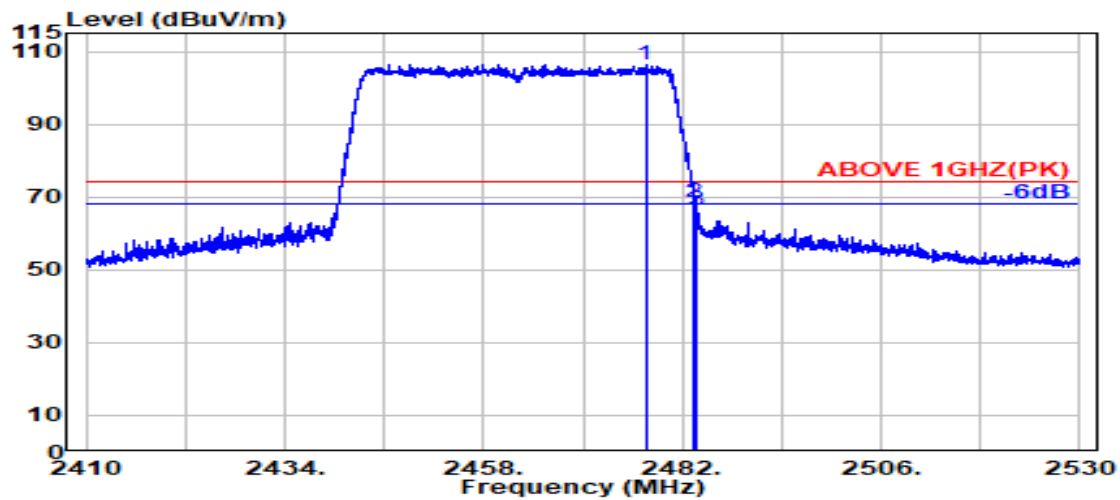

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.550	28.36	5.82	39.87	112.14	106.45	---	---	Peak
2483.500	28.37	5.83	39.87	74.37	68.69	74.00	5.31	Peak
2483.800	28.37	5.83	39.87	72.02	66.35	74.00	7.65	Peak

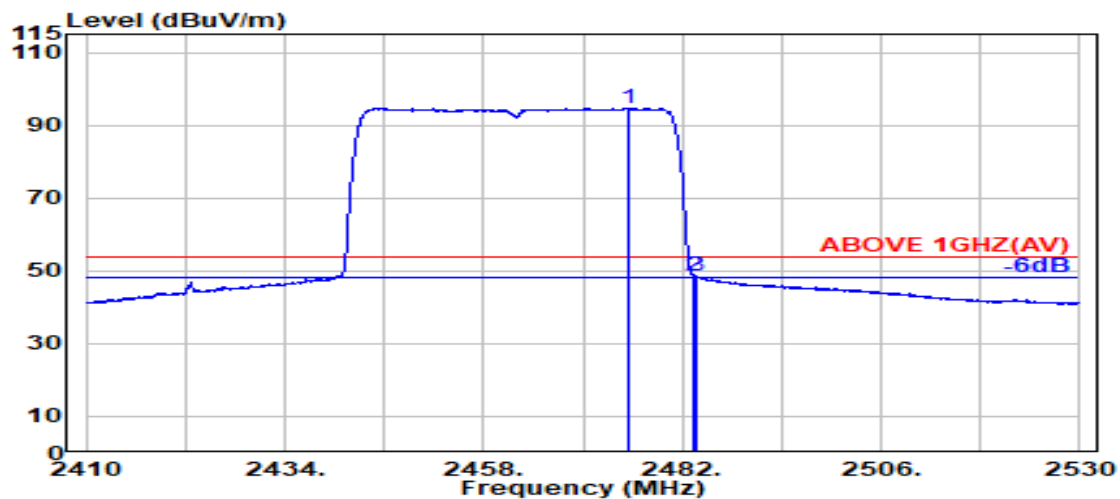


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	28.35	5.82	39.87	100.47	94.77	---	---	Average
2483.500	28.37	5.83	39.87	54.27	48.59	54.00	5.41	Average
2483.700	28.37	5.83	39.87	54.10	48.43	54.00	5.57	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

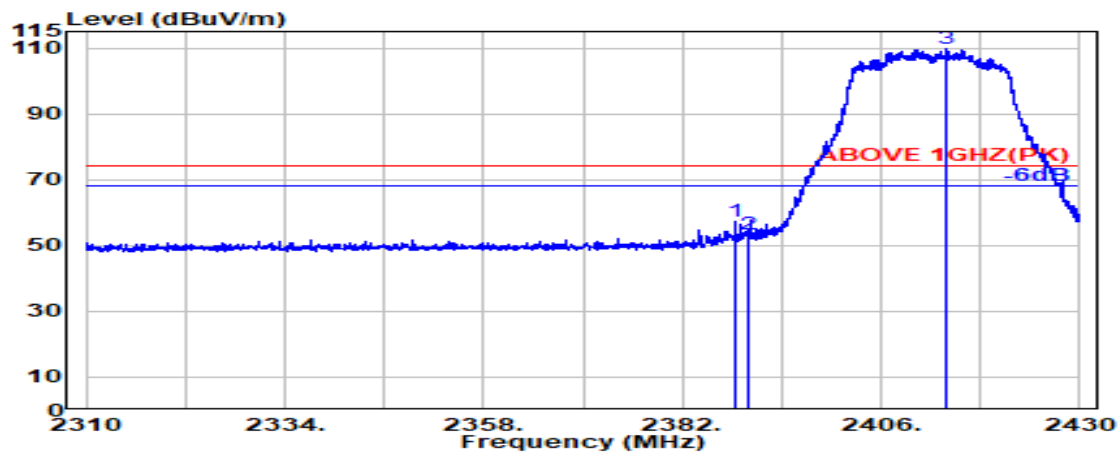

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.88	63.48	57.47	74.00	16.53	Peak
2390.000	28.14	5.72	39.88	59.31	53.30	74.00	20.70	Peak
@ 2413.750	28.16	5.75	39.88	115.90	109.93	---	---	Peak

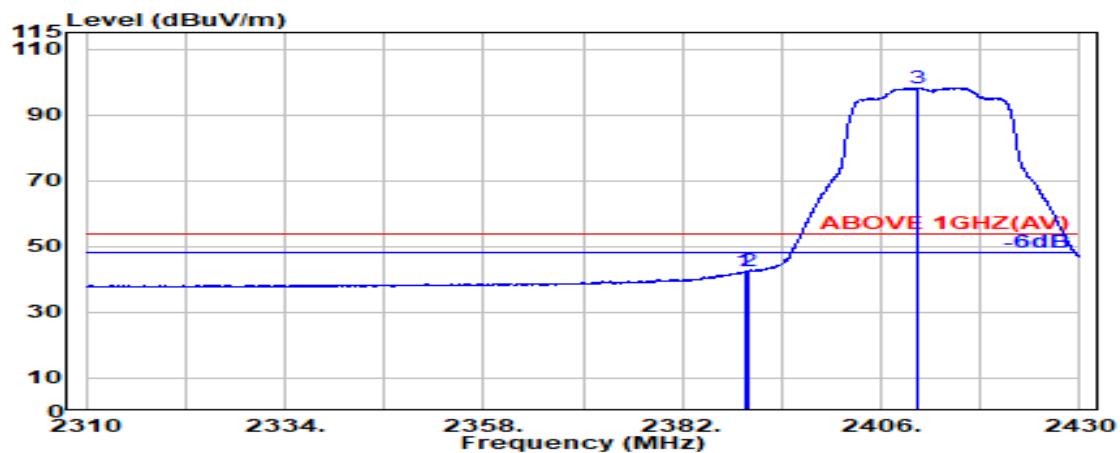


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	48.33	42.32	54.00	11.68	Average
2390.000	28.14	5.72	39.88	48.58	42.56	54.00	11.44	Average
@ 2410.450	28.14	5.75	39.88	104.27	98.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

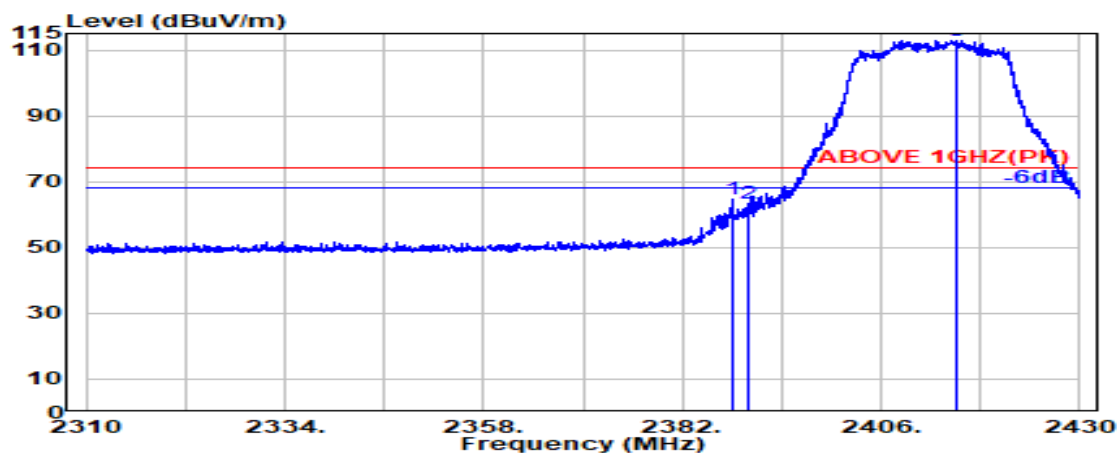

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.15	5.72	39.88	70.49	64.48	74.00	9.52	Peak
2390.000	28.14	5.72	39.88	69.58	63.56	74.00	10.44	Peak
@ 2415.150	28.16	5.75	39.88	118.84	112.87	---	---	Peak

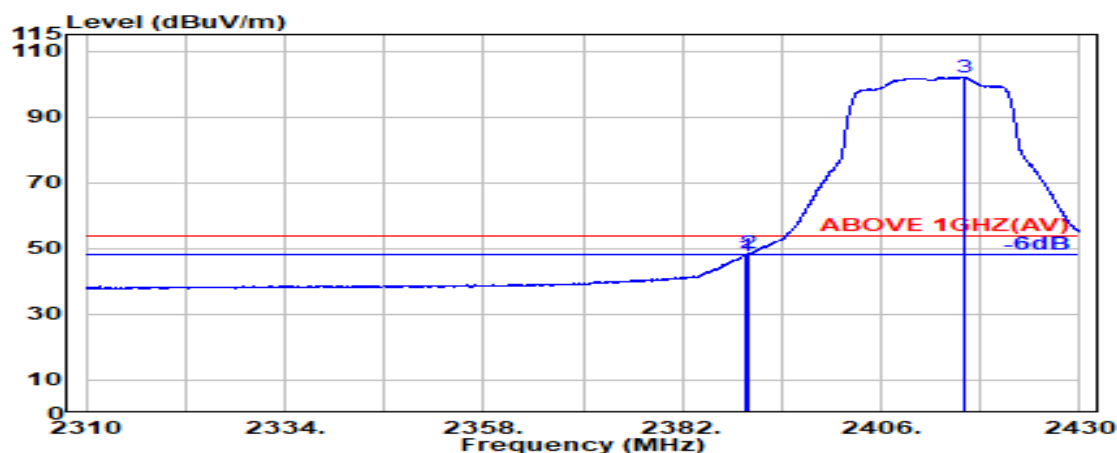


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	53.82	47.80	54.00	6.20	Average
2390.000	28.14	5.72	39.88	54.50	48.48	54.00	5.52	Average
@ 2416.150	28.17	5.75	39.88	108.01	102.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

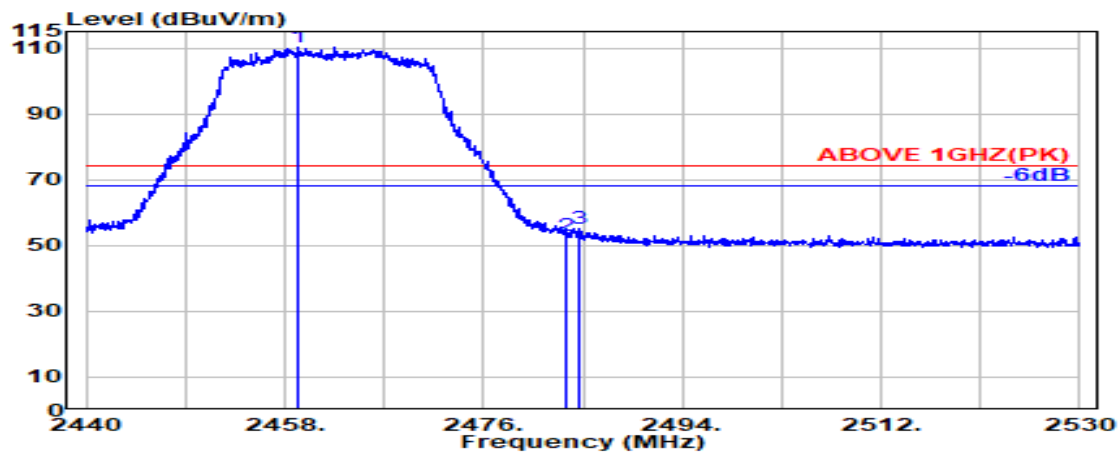

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.150	28.32	5.80	39.87	115.86	110.11	---	---	Peak
2483.500	28.37	5.83	39.87	58.65	52.98	74.00	21.02	Peak
2484.650	28.37	5.83	39.87	61.00	55.33	74.00	18.67	Peak

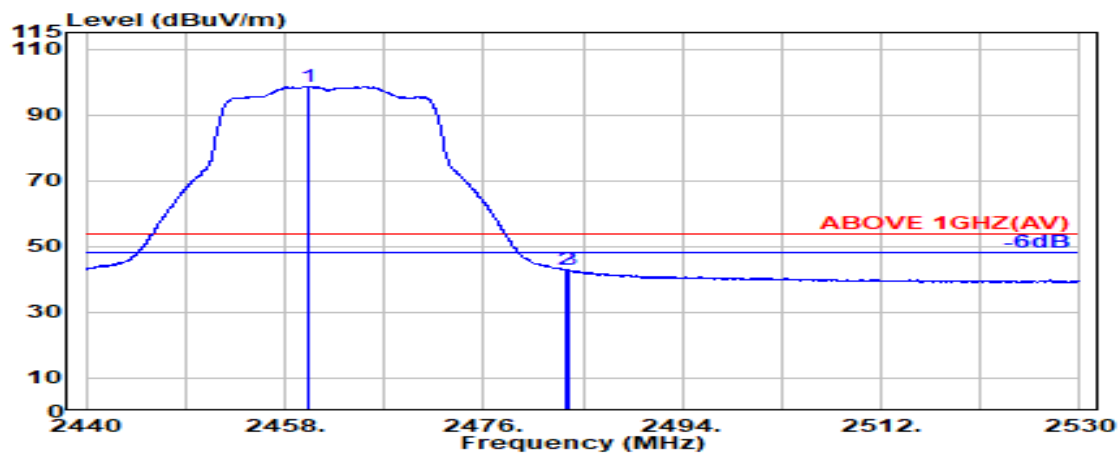

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	28.32	5.80	39.87	104.37	98.62	---	---	Average
2483.500	28.37	5.83	39.87	48.62	42.95	54.00	11.05	Average
2483.700	28.37	5.83	39.87	48.45	42.78	54.00	11.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

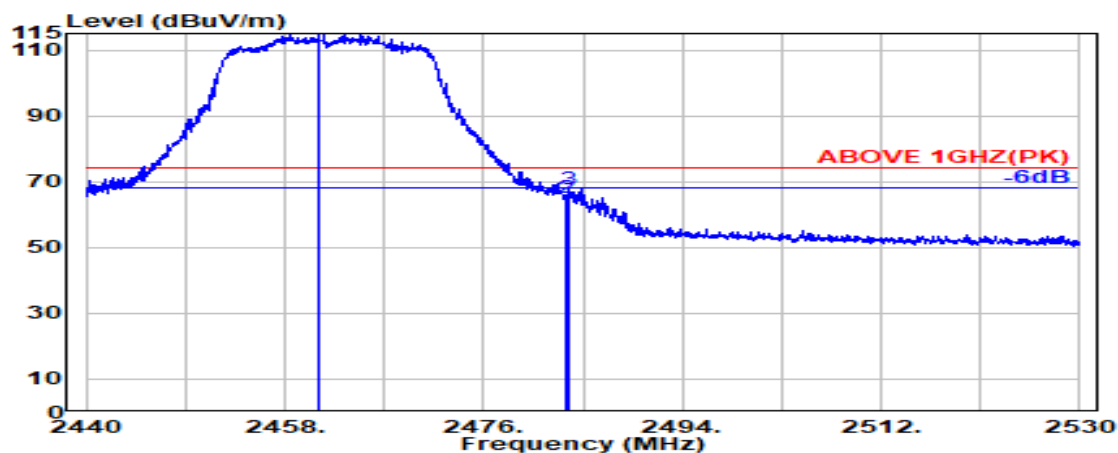

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.050	28.32	5.80	39.87	121.15	115.40	---	---	Peak
2483.500	28.37	5.83	39.87	70.81	65.14	74.00	8.86	Peak
2483.750	28.37	5.83	39.87	73.55	67.87	74.00	6.13	Peak

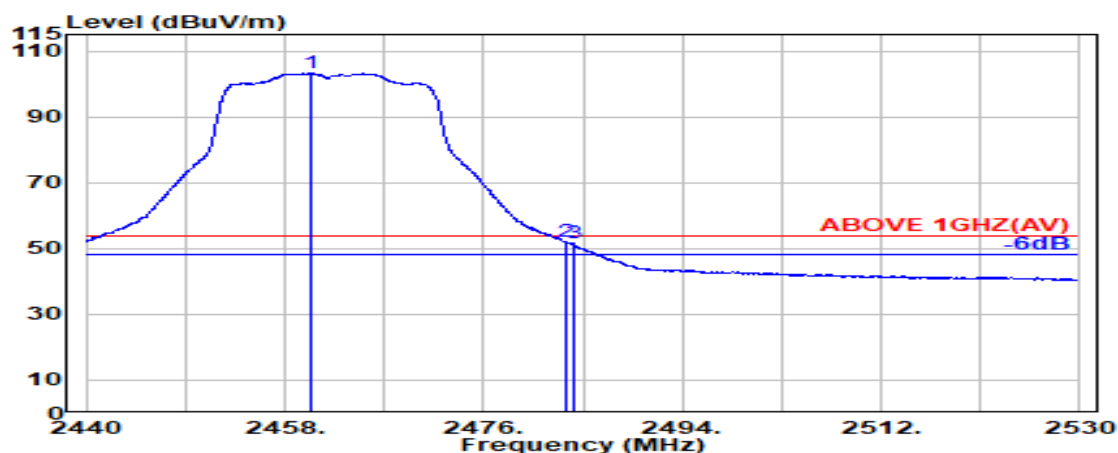

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	28.32	5.80	39.87	108.93	103.19	---	---	Average
2483.500	28.37	5.83	39.87	57.69	52.02	54.00	1.98	Average
2484.100	28.37	5.83	39.87	57.47	51.80	54.00	2.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

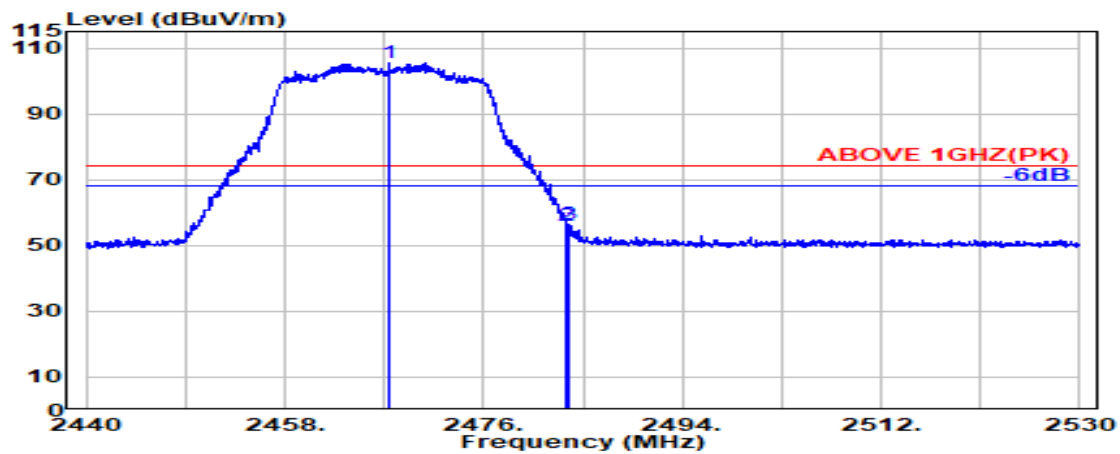

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.500	28.34	5.81	39.87	111.35	105.62	---	---	Peak
2483.500	28.37	5.83	39.87	61.54	55.87	74.00	18.13	Peak
2483.750	28.37	5.83	39.87	62.09	56.42	74.00	17.58	Peak

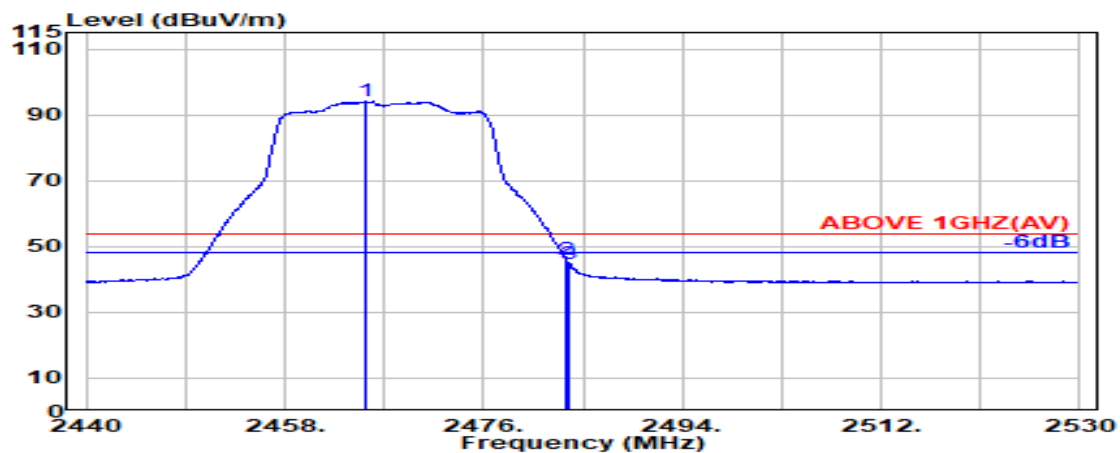

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.300	28.33	5.81	39.87	99.83	94.10	---	---	Average
2483.500	28.37	5.83	39.87	51.53	45.86	54.00	8.14	Average
2483.700	28.37	5.83	39.87	50.57	44.90	54.00	9.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

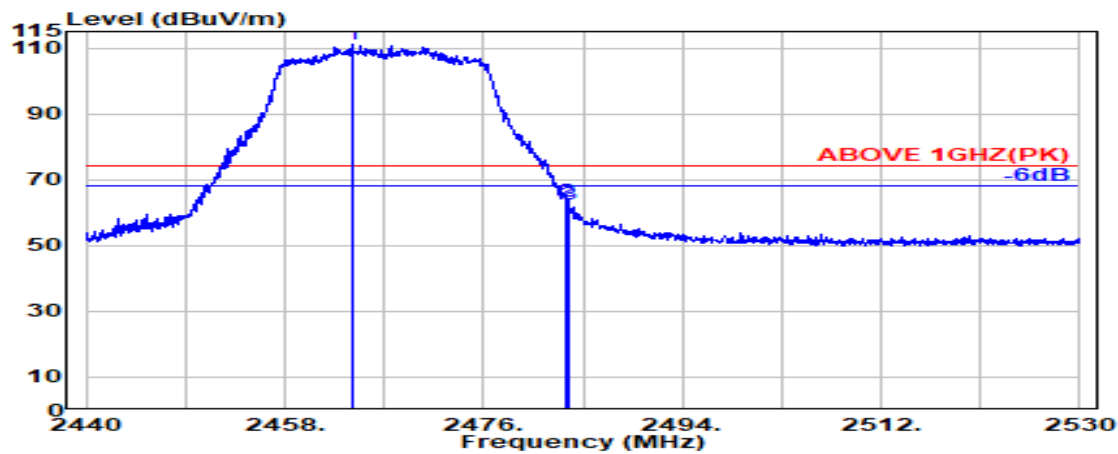

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.050	28.33	5.81	39.87	116.62	110.88	---	---	Peak
2483.500	28.37	5.83	39.87	68.95	63.28	74.00	10.72	Peak
2483.750	28.37	5.83	39.87	68.19	62.52	74.00	11.48	Peak

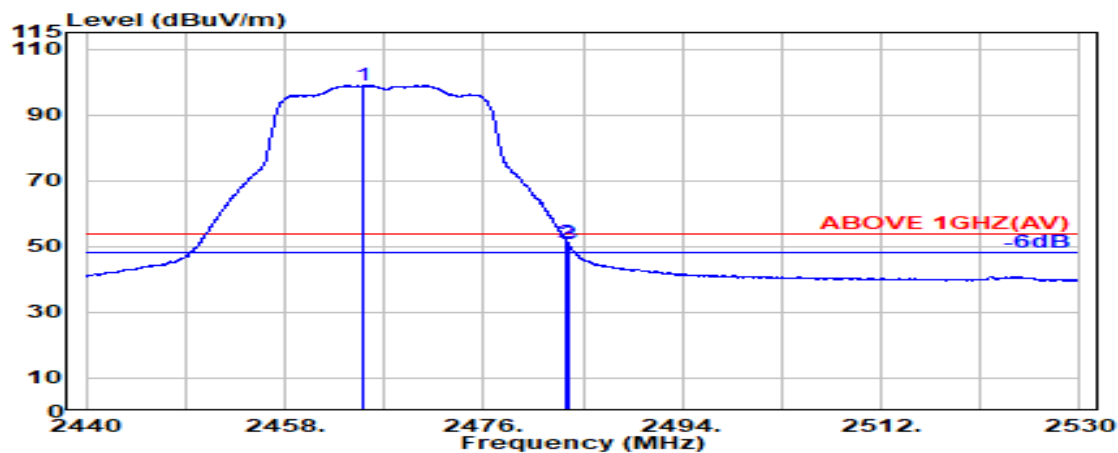

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.150	28.33	5.81	39.87	104.68	98.95	---	---	Average
2483.500	28.37	5.83	39.87	57.02	51.35	54.00	2.65	Average
2483.700	28.37	5.83	39.87	56.33	50.65	54.00	3.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

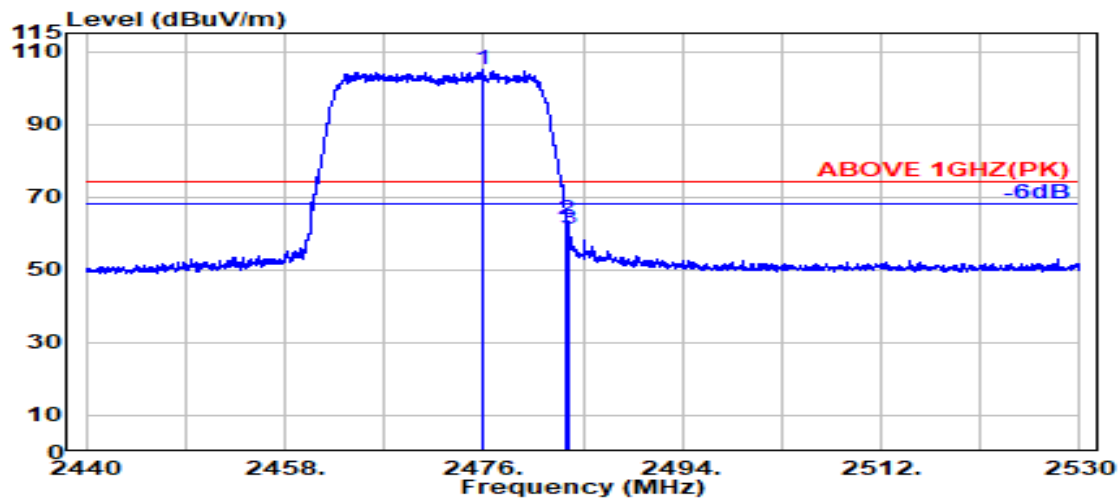

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.900	28.35	5.82	39.87	110.58	104.88	---	---	Peak
2483.500	28.37	5.83	39.87	69.41	63.74	74.00	10.26	Peak
2483.700	28.37	5.83	39.87	66.81	61.14	74.00	12.86	Peak

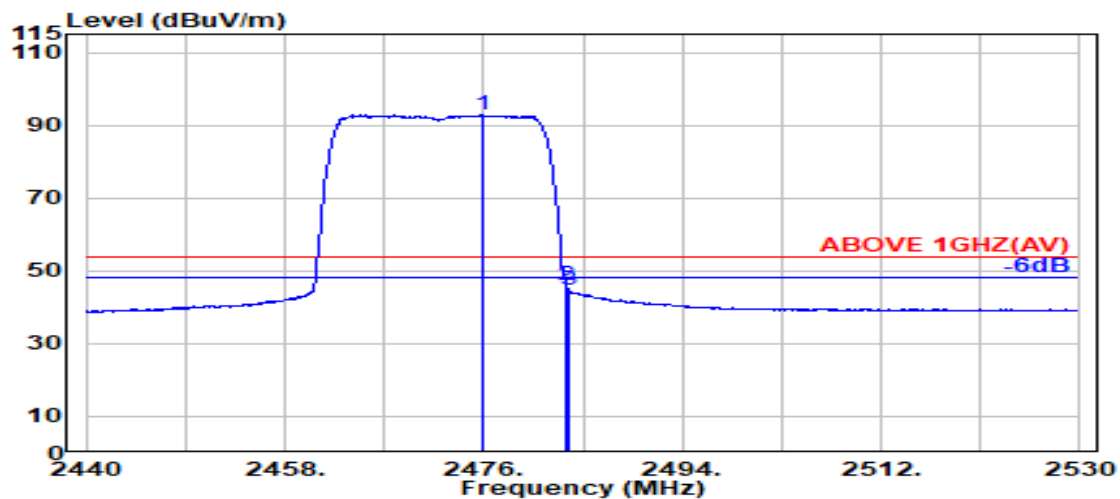

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.900	28.35	5.82	39.87	98.50	92.80	---	---	Average
2483.500	28.37	5.83	39.87	51.69	46.02	54.00	7.98	Average
2483.700	28.37	5.83	39.87	50.51	44.83	54.00	9.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

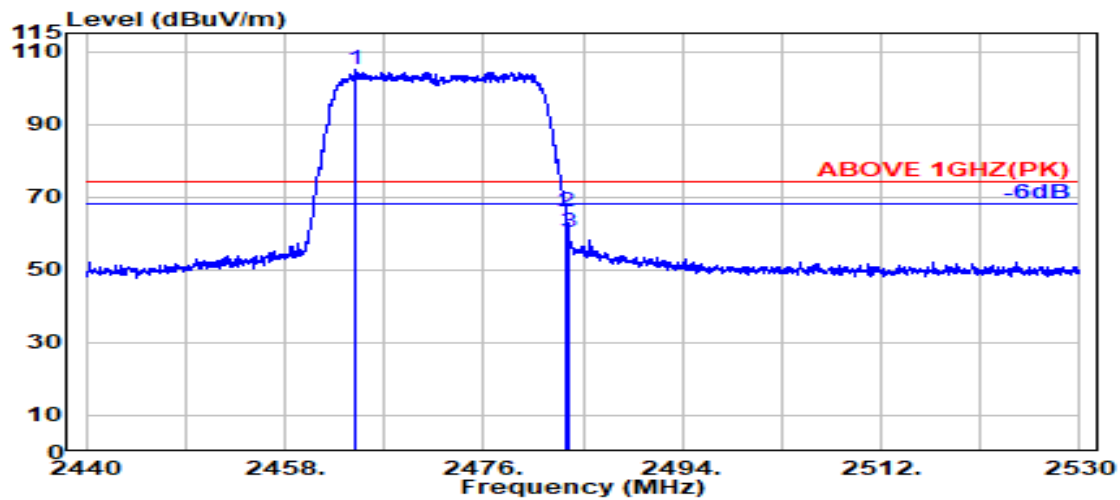

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.33	5.81	39.87	110.77	105.04	---	---	Peak
2483.500	28.37	5.83	39.87	71.46	65.79	74.00	8.21	Peak
2483.700	28.37	5.83	39.87	66.05	60.38	74.00	13.62	Peak

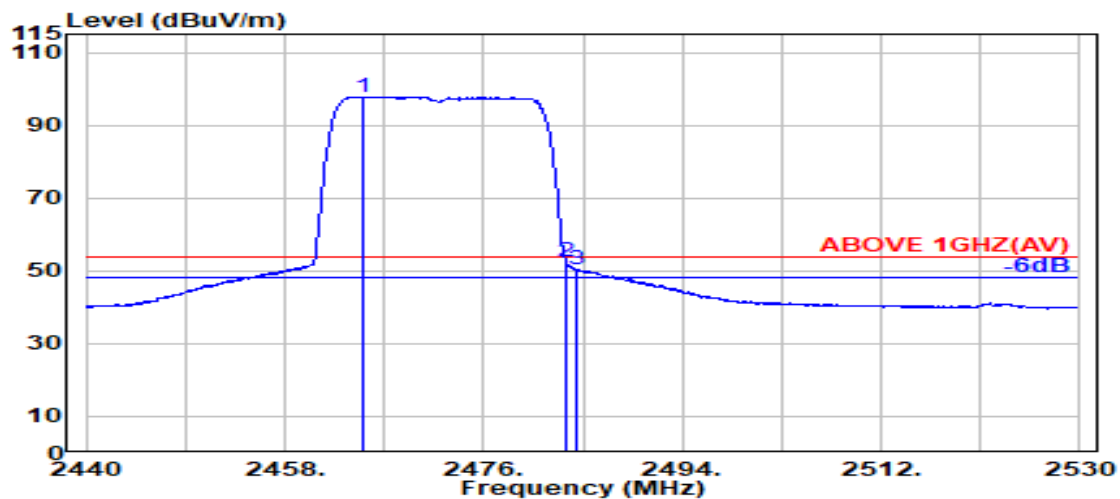

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.33	5.81	39.87	103.58	97.84	---	---	QP
2483.500	28.37	5.83	39.87	58.05	52.38	54.00	1.62	QP
2484.400	28.37	5.83	39.87	55.92	50.25	54.00	3.75	QP

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

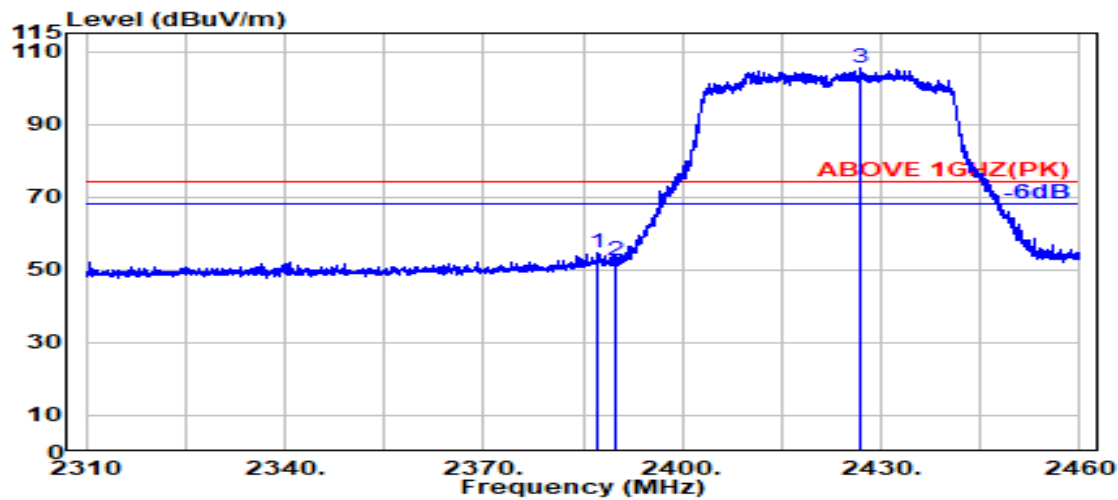

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.300	28.15	5.72	39.88	60.49	54.48	74.00	19.52	Peak
2389.800	28.14	5.72	39.88	58.50	52.48	74.00	21.52	Peak
@ 2426.950	28.21	5.76	39.88	111.31	105.40	---	---	Peak

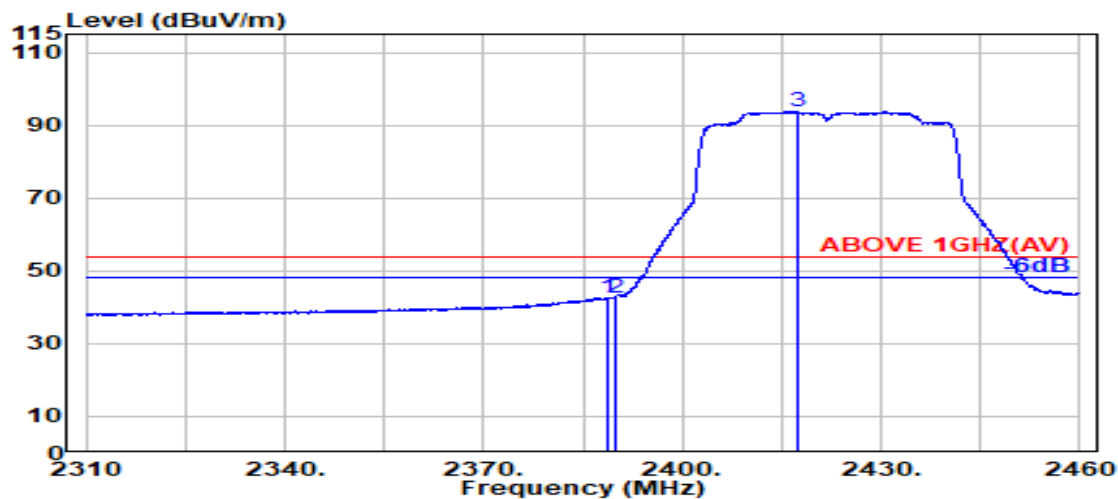

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	48.67	42.65	54.00	11.35	Average
2389.800	28.14	5.72	39.88	48.65	42.63	54.00	11.37	Average
@ 2417.250	28.17	5.75	39.88	99.57	93.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

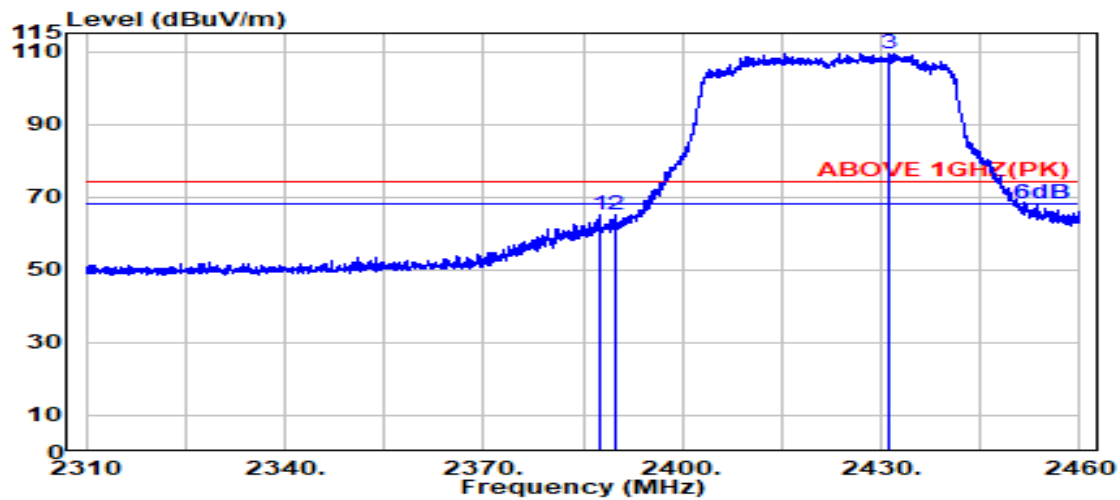

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.15	5.72	39.88	71.06	65.05	74.00	8.95	Peak
2389.800	28.14	5.72	39.88	70.91	64.90	74.00	9.10	Peak
@ 2431.100	28.22	5.77	39.88	115.26	109.38	---	---	Peak

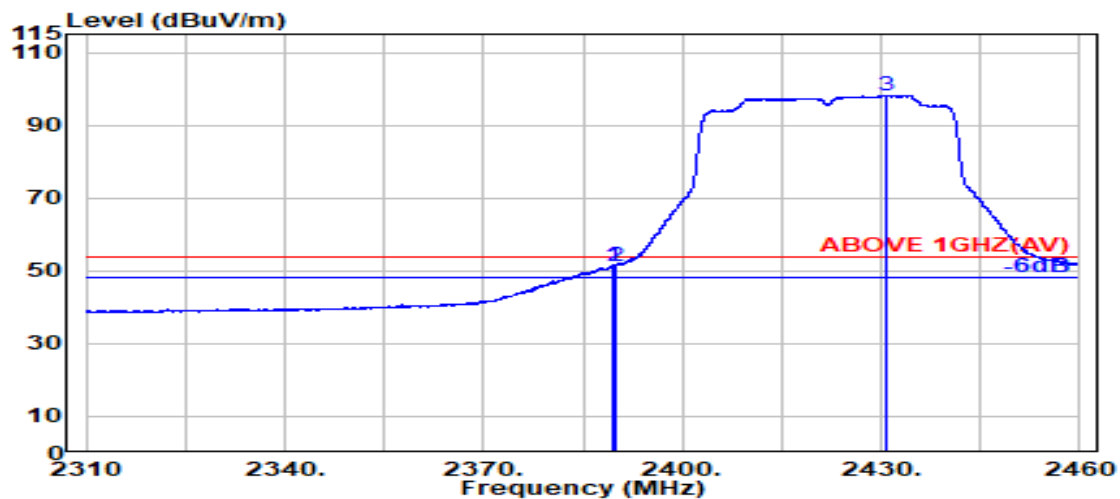

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	57.43	51.41	54.00	2.59	Average
2389.800	28.14	5.72	39.88	57.42	51.40	54.00	2.60	Average
@ 2430.700	28.22	5.77	39.88	104.16	98.28	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

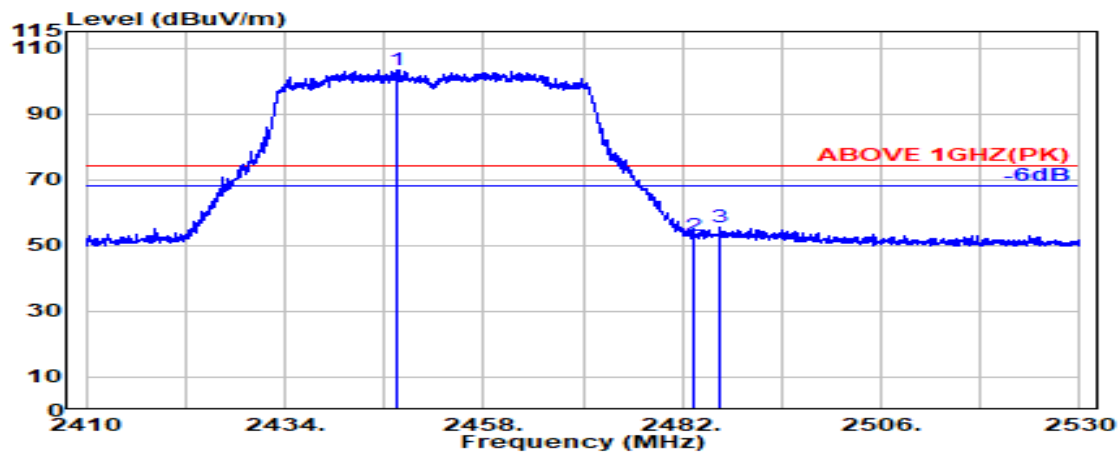

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2447.650	28.29	5.79	39.87	108.89	103.10	---	---	Peak
2483.500	28.37	5.83	39.87	58.43	52.76	74.00	21.24	Peak
2486.500	28.37	5.83	39.87	61.35	55.69	74.00	18.31	Peak

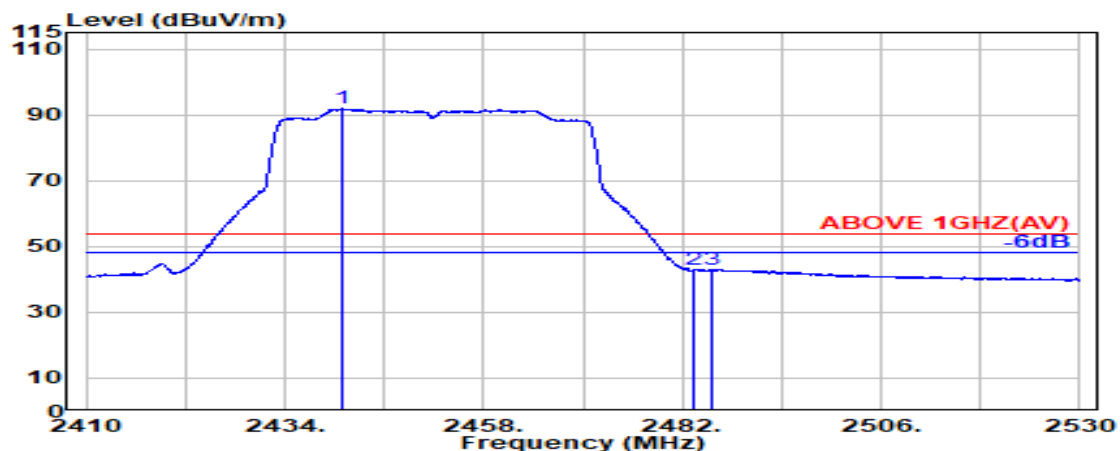

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2441.050	28.26	5.78	39.87	97.61	91.79	---	---	Average
2483.500	28.37	5.83	39.87	48.80	43.13	54.00	10.87	Average
2485.550	28.37	5.83	39.87	48.76	43.10	54.00	10.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

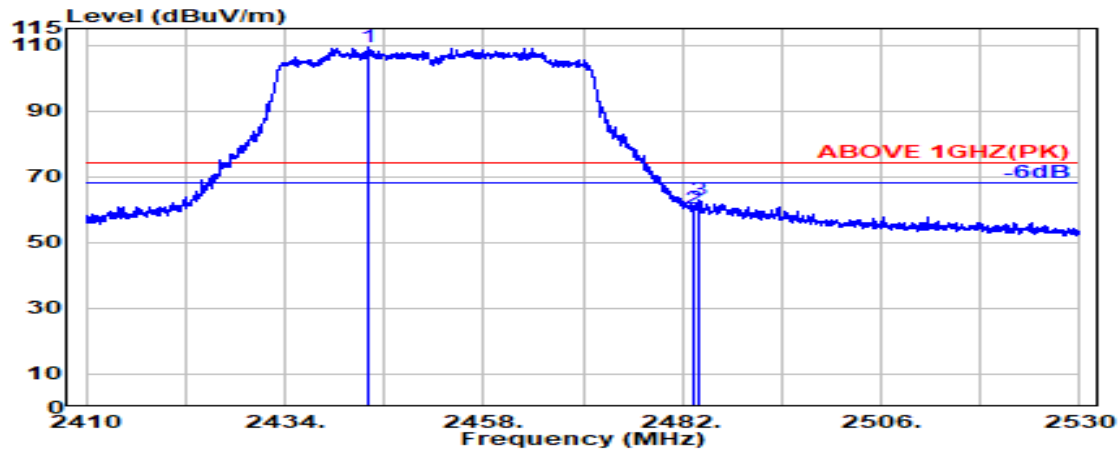

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2444.000	28.28	5.79	39.87	115.00	109.19	---	---	Peak
2483.500	28.37	5.83	39.87	66.01	60.34	74.00	13.66	Peak
2484.100	28.37	5.83	39.87	68.70	63.03	74.00	10.97	Peak

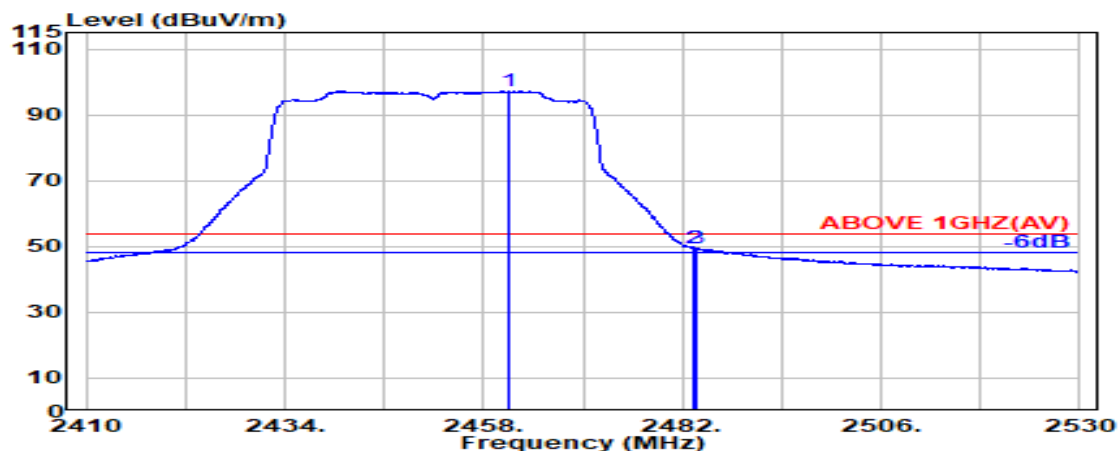

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.100	28.32	5.81	39.87	102.95	97.21	---	---	Average
2483.500	28.37	5.83	39.87	55.14	49.47	54.00	4.53	Average
2483.750	28.37	5.83	39.87	55.01	49.34	54.00	4.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

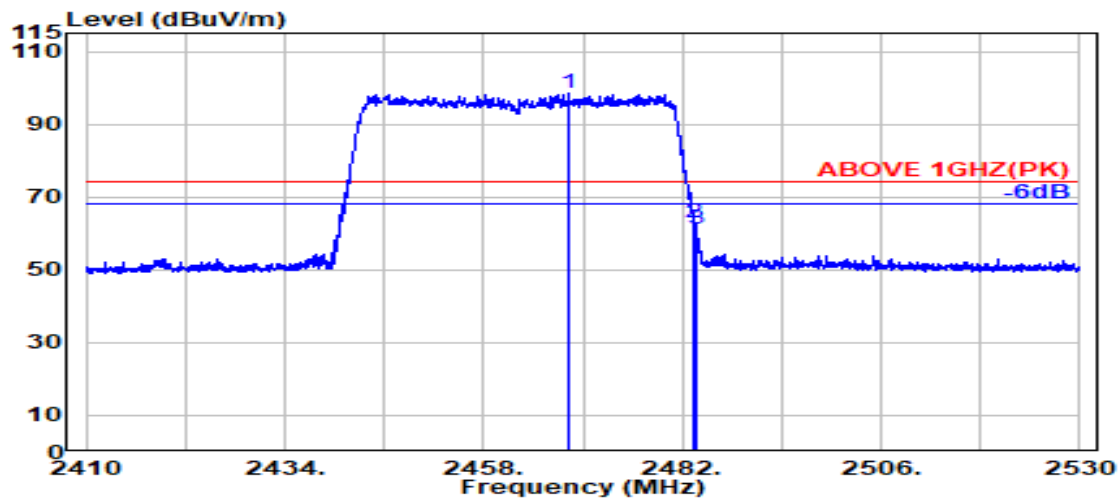

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.250	28.34	5.81	39.87	104.10	98.38	---	---	Peak
2483.500	28.37	5.83	39.87	68.71	63.04	74.00	10.96	Peak
2483.750	28.37	5.83	39.87	66.87	61.20	74.00	12.80	Peak

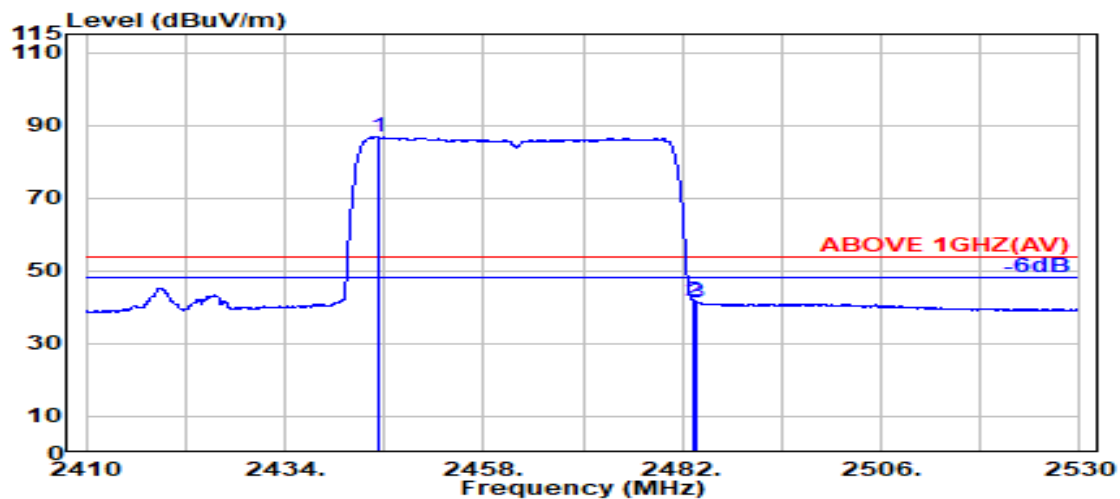

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.300	28.28	5.79	39.87	92.57	86.77	---	---	Average
2483.500	28.37	5.83	39.87	47.28	41.61	54.00	12.39	Average
2483.700	28.37	5.83	39.87	47.03	41.35	54.00	12.65	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

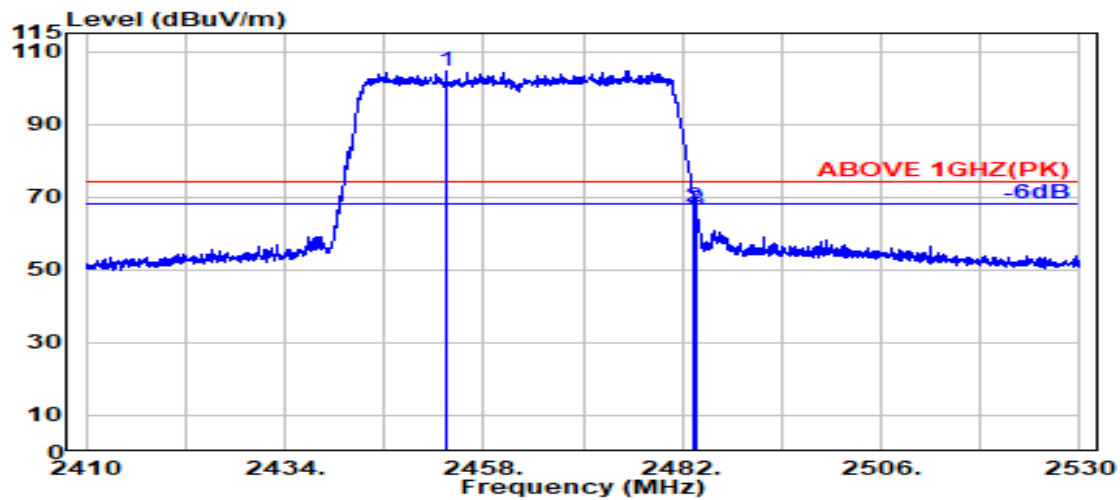

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	28.31	5.80	39.87	110.19	104.42	---	---	Peak
2483.500	28.37	5.83	39.87	73.03	67.36	74.00	6.64	Peak
2483.750	28.37	5.83	39.87	72.26	66.59	74.00	7.41	Peak

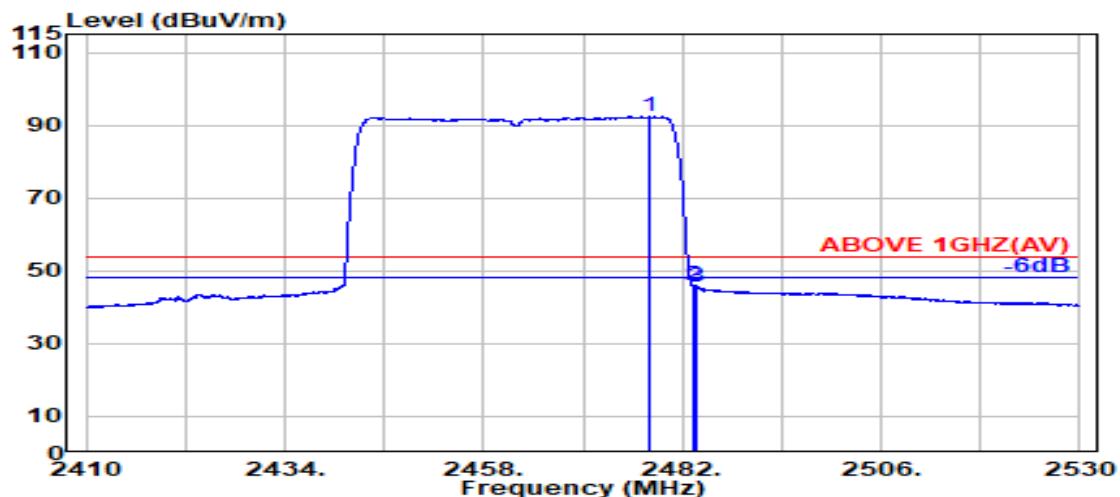

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.100	28.36	5.82	39.87	98.03	92.34	---	---	Average
2483.500	28.37	5.83	39.87	51.50	45.82	54.00	8.18	Average
2483.700	28.37	5.83	39.87	51.28	45.60	54.00	8.40	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

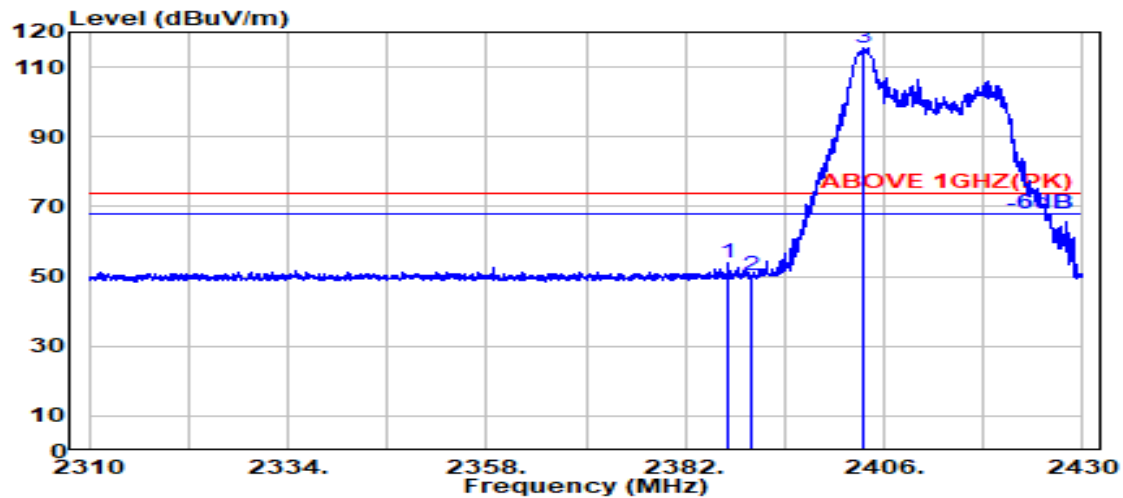

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.200	28.15	5.72	39.88	59.77	53.76	74.00	20.24	Peak
2390.000	28.14	5.72	39.88	56.10	50.08	74.00	23.92	Peak
@ 2403.500	28.11	5.74	39.88	121.41	115.39	---	---	Peak

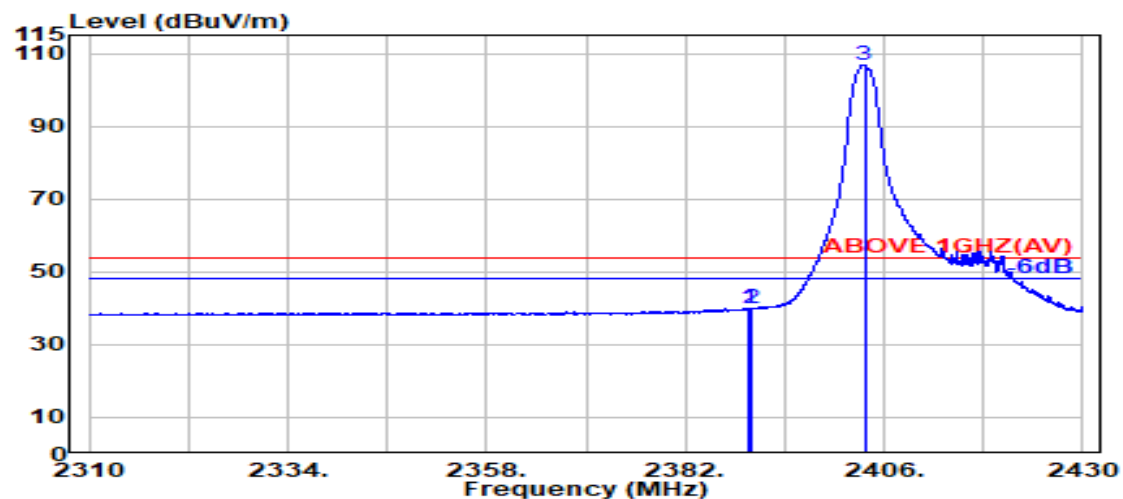

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	46.12	40.10	54.00	13.90	Average
2390.000	28.14	5.72	39.88	45.80	39.78	54.00	14.22	Average
@ 2403.650	28.11	5.74	39.88	112.99	106.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

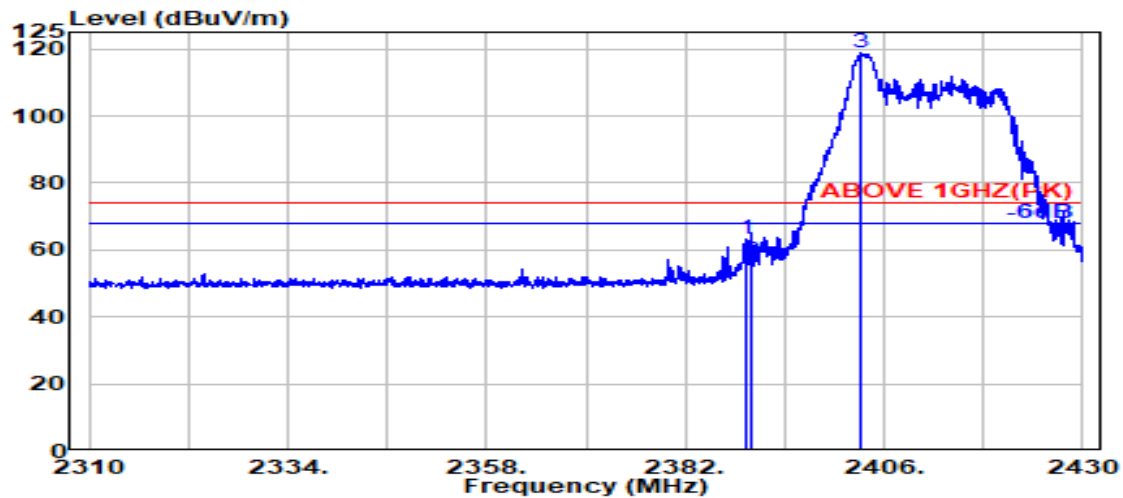

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	69.31	63.29	74.00	10.71	Peak
2390.000	28.14	5.72	39.88	62.55	56.53	74.00	17.47	Peak
@ 2403.300	28.11	5.74	39.88	124.93	118.91	---	---	Peak

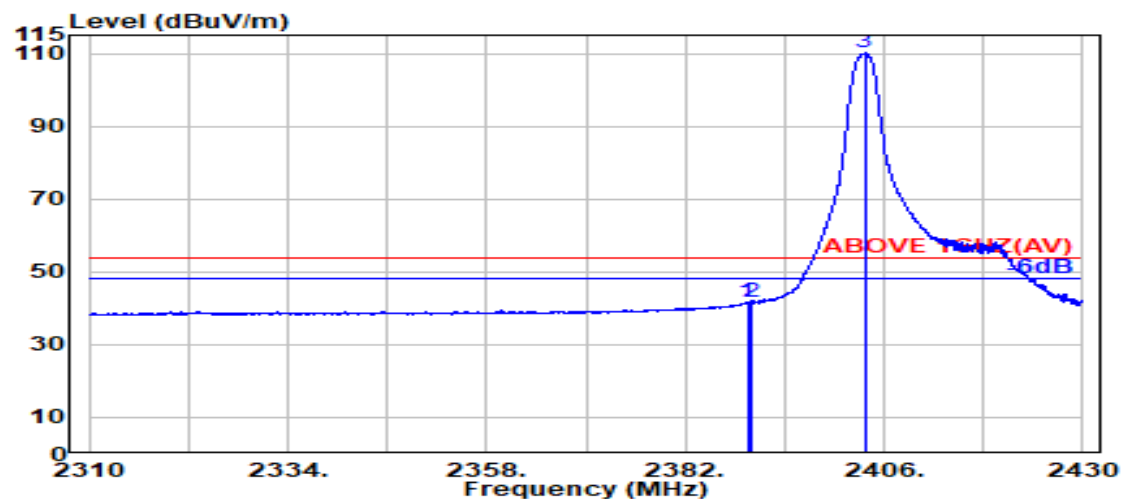

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	47.87	41.85	54.00	12.15	Average
2390.000	28.14	5.72	39.88	47.79	41.78	54.00	12.22	Average
@ 2403.650	28.11	5.74	39.88	116.11	110.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

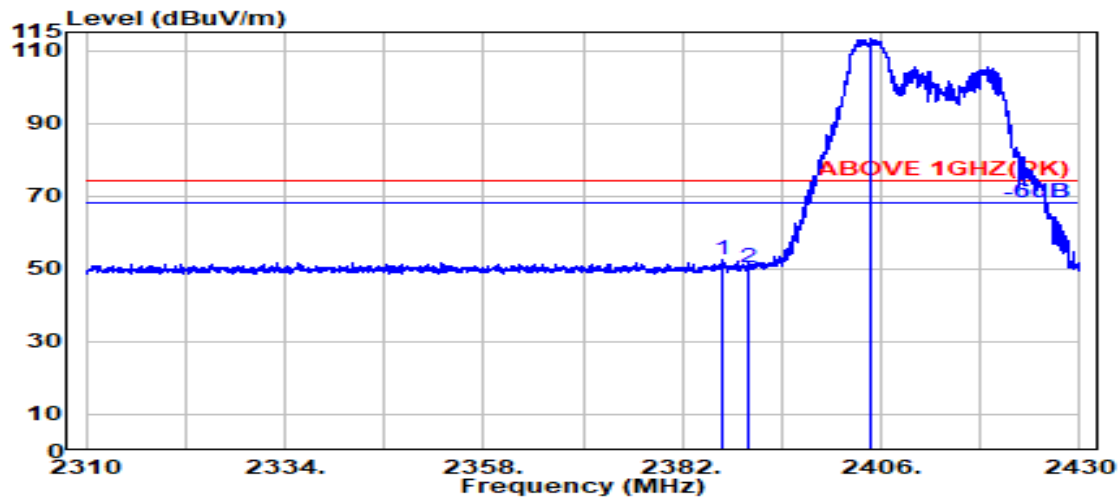

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.950	28.15	5.72	39.88	58.54	52.53	74.00	21.47	Peak
2390.000	28.14	5.72	39.88	56.53	50.51	74.00	23.49	Peak
@ 2404.650	28.12	5.74	39.88	119.31	113.29	---	---	Peak

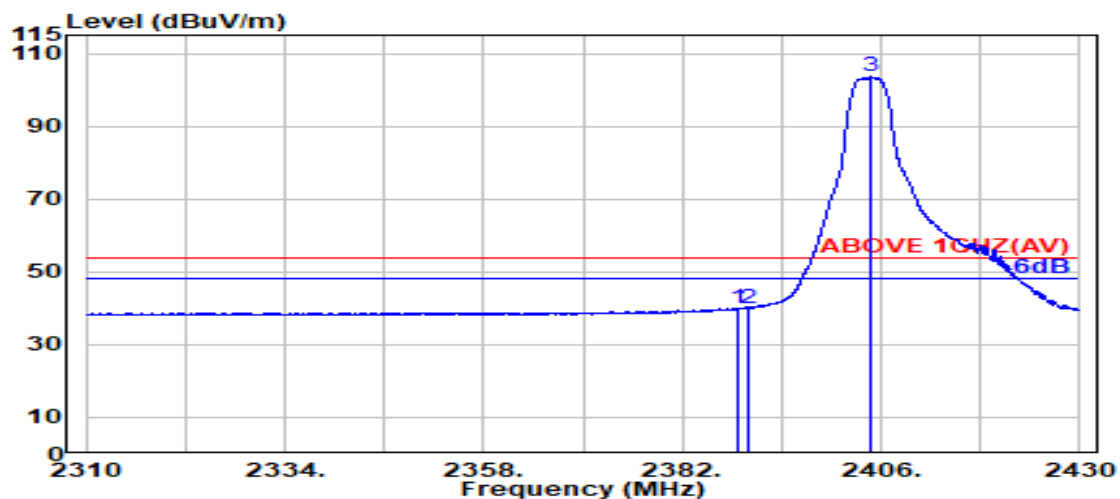

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.14	5.72	39.88	46.11	40.10	54.00	13.90	Average
2390.000	28.14	5.72	39.88	46.15	40.13	54.00	13.87	Average
@ 2404.750	28.12	5.74	39.88	109.66	103.64	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

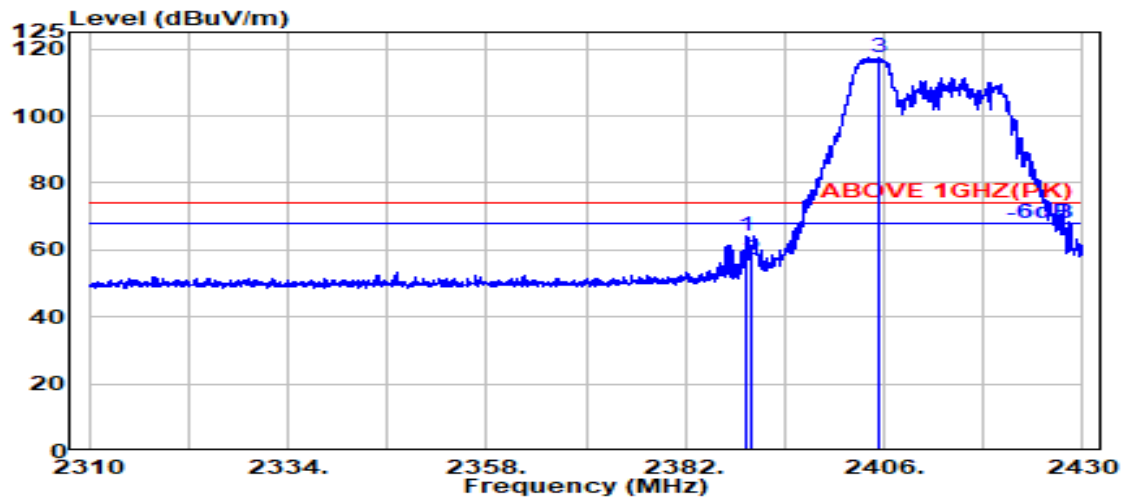

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	69.99	63.97	74.00	10.03	Peak
2390.000	28.14	5.72	39.88	63.15	57.13	74.00	16.87	Peak
@ 2405.300	28.12	5.74	39.88	123.40	117.39	---	---	Peak

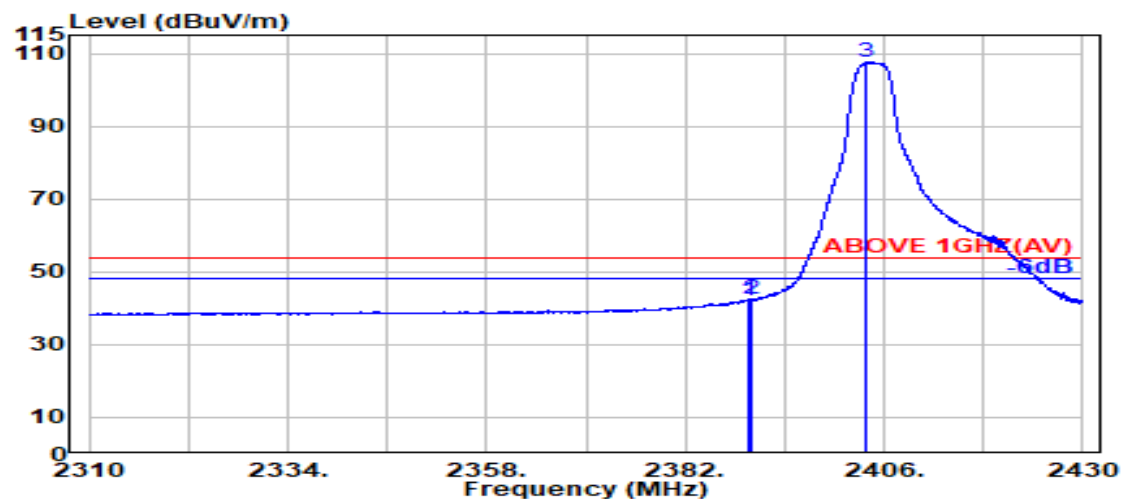

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	48.25	42.23	54.00	11.77	Average
2390.000	28.14	5.72	39.88	48.35	42.33	54.00	11.67	Average
@ 2403.950	28.12	5.74	39.88	113.46	107.44	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

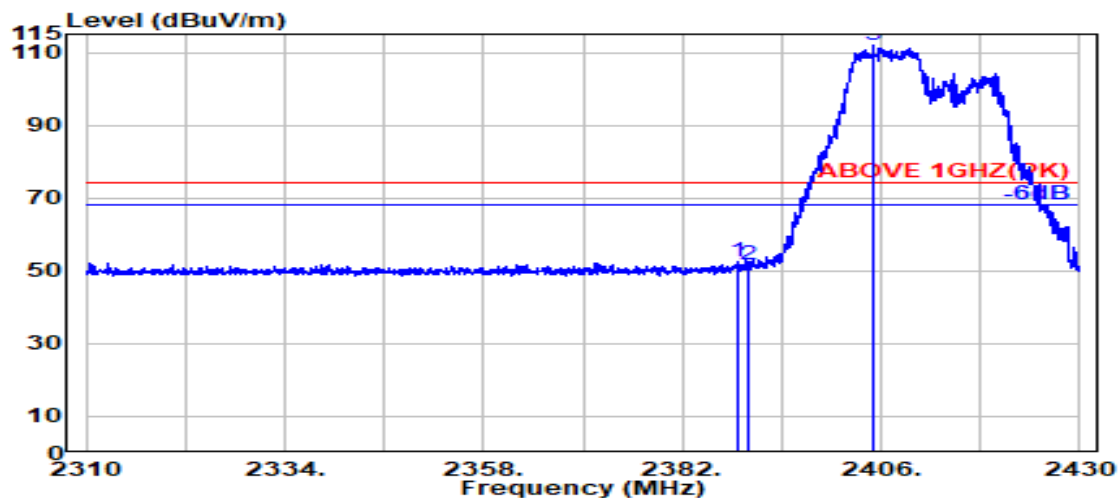

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.650	28.15	5.72	39.88	58.59	52.58	74.00	21.42	Peak
2390.000	28.14	5.72	39.88	57.67	51.65	74.00	22.35	Peak
@ 2405.100	28.12	5.74	39.88	117.85	111.83	---	---	Peak

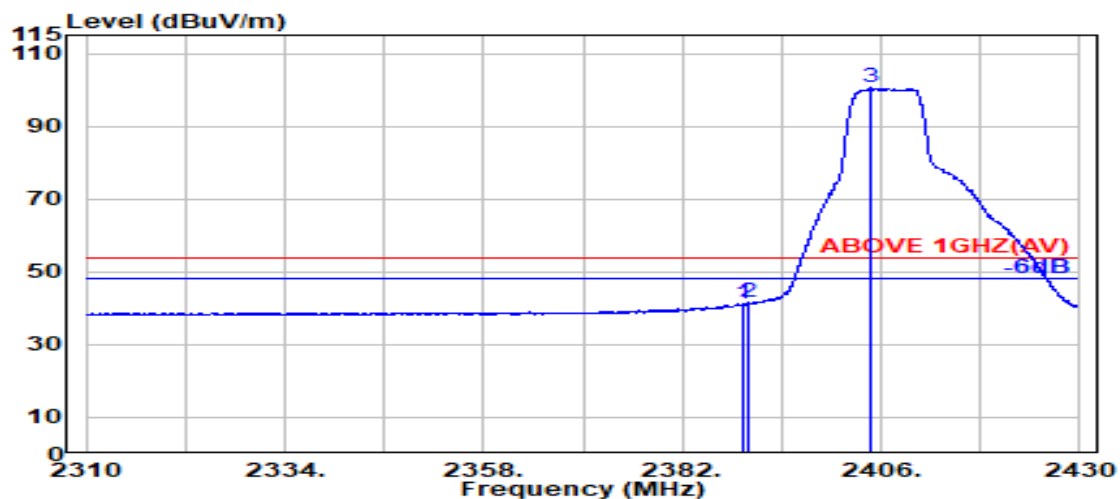

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	47.07	41.05	54.00	12.95	Average
2390.000	28.14	5.72	39.88	47.62	41.60	54.00	12.40	Average
@ 2404.700	28.12	5.74	39.88	106.52	100.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

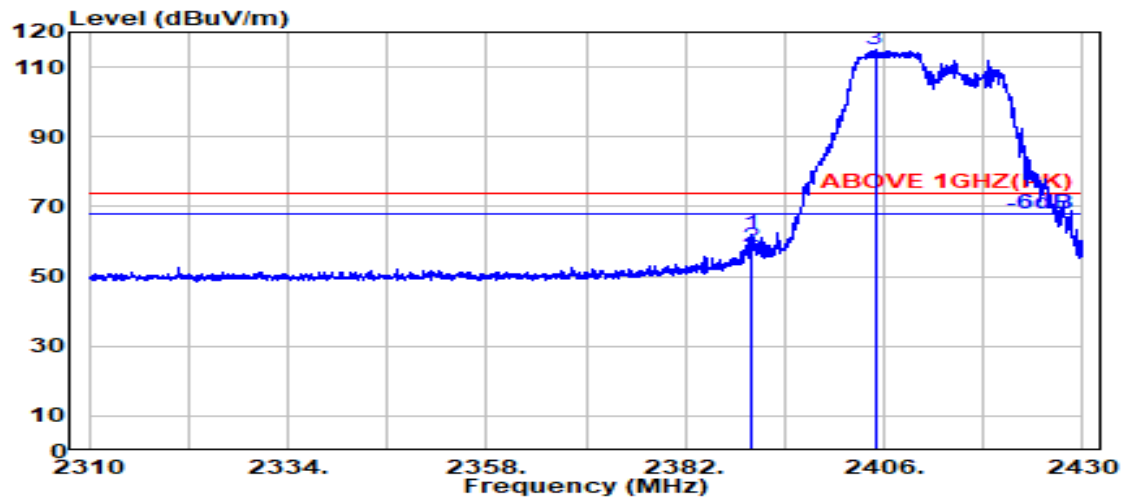

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.850	28.14	5.72	39.88	68.24	62.22	74.00	11.78	Peak
2390.000	28.14	5.72	39.88	64.48	58.47	74.00	15.53	Peak
@ 2404.900	28.12	5.74	39.88	120.96	114.94	---	---	Peak

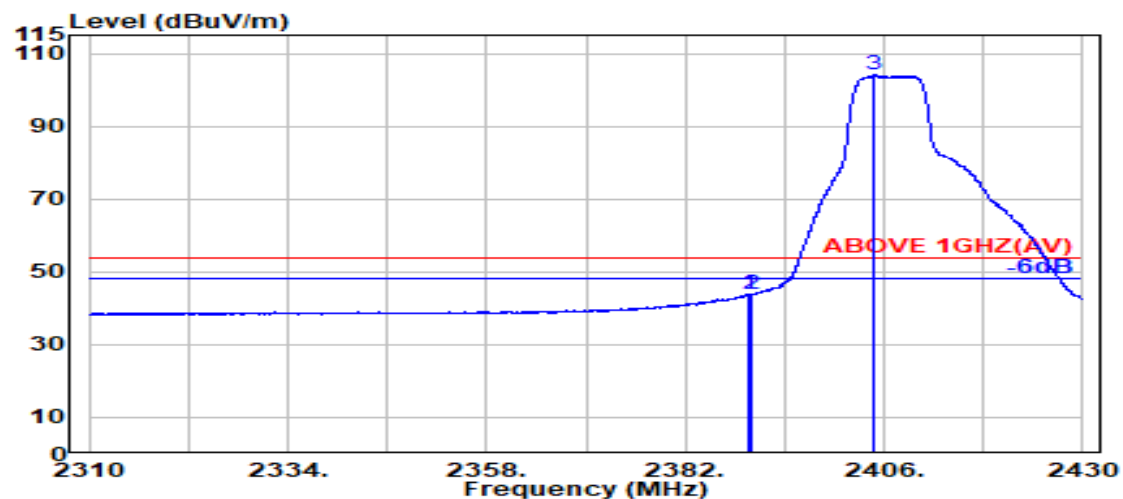


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	49.76	43.75	54.00	10.25	Average
2390.000	28.14	5.72	39.88	49.73	43.71	54.00	10.29	Average
@ 2404.800	28.12	5.74	39.88	110.17	104.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

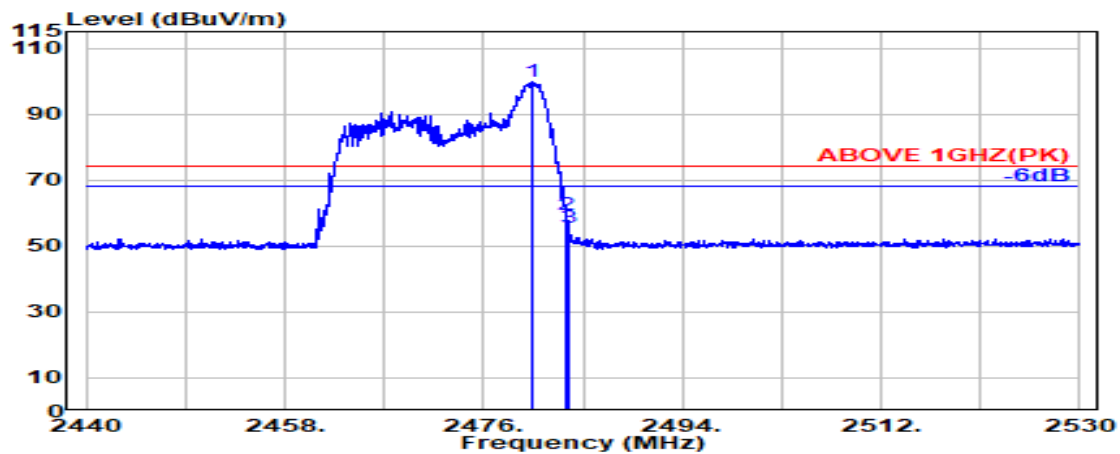

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.350	28.36	5.83	39.87	105.32	99.63	---	---	Peak
2483.500	28.37	5.83	39.87	64.91	59.24	74.00	14.76	Peak
2483.700	28.37	5.83	39.87	61.01	55.34	74.00	18.66	Peak

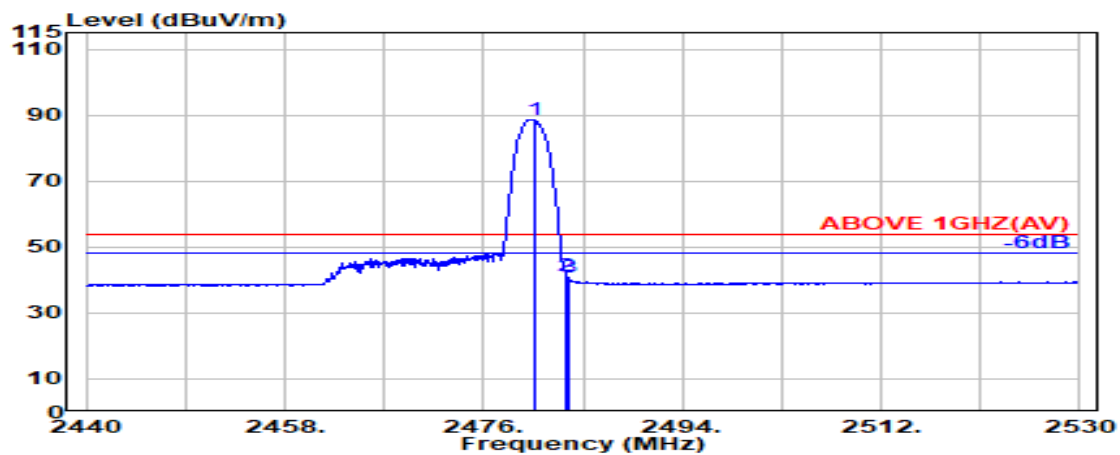

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.550	28.36	5.83	39.87	94.27	88.59	---	---	Average
2483.500	28.37	5.83	39.87	46.97	41.30	54.00	12.70	Average
2483.700	28.37	5.83	39.87	46.28	40.61	54.00	13.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

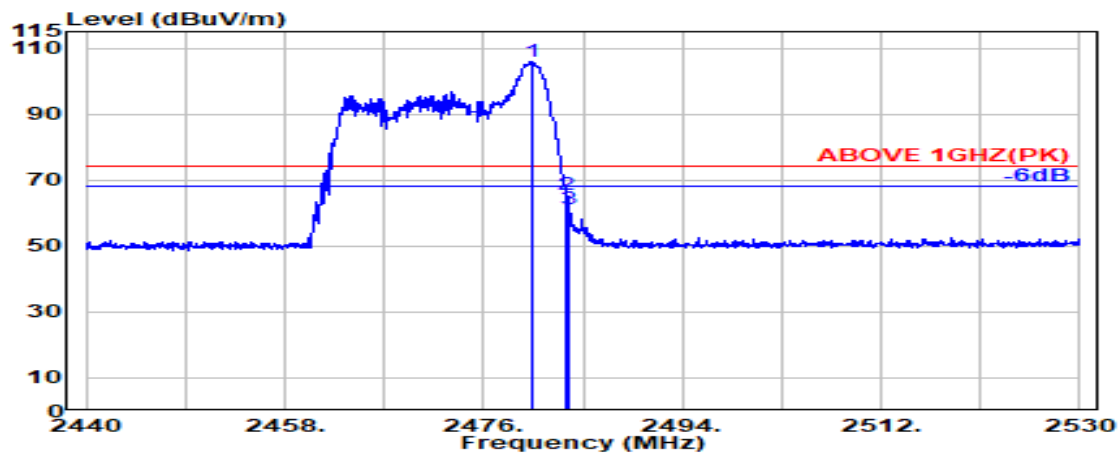

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.83	39.87	111.76	106.08	---	---	Peak
2483.500	28.37	5.83	39.87	71.19	65.52	74.00	8.48	Peak
2483.700	28.37	5.83	39.87	66.83	61.16	74.00	12.84	Peak

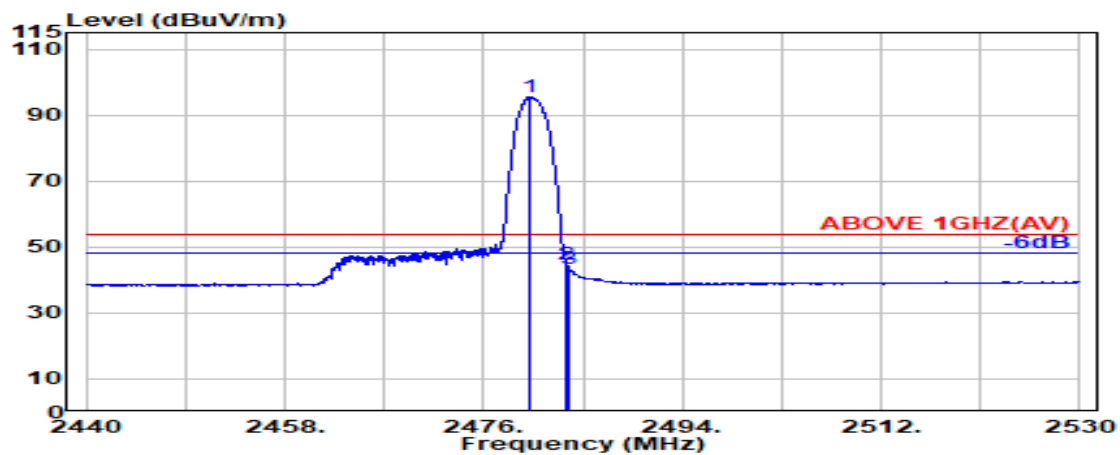

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.36	5.83	39.87	101.15	95.47	---	---	Average
2483.500	28.37	5.83	39.87	50.51	44.83	54.00	9.17	Average
2483.700	28.37	5.83	39.87	49.28	43.61	54.00	10.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

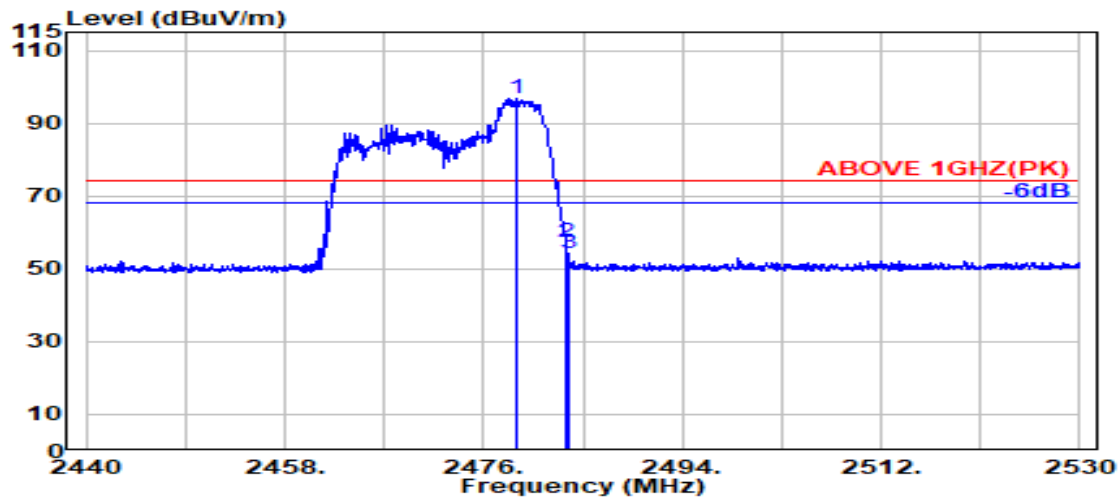

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.950	28.36	5.83	39.87	102.50	96.81	---	---	Peak
2483.500	28.37	5.83	39.87	63.07	57.40	74.00	16.60	Peak
2483.700	28.37	5.83	39.87	60.06	54.39	74.00	19.61	Peak

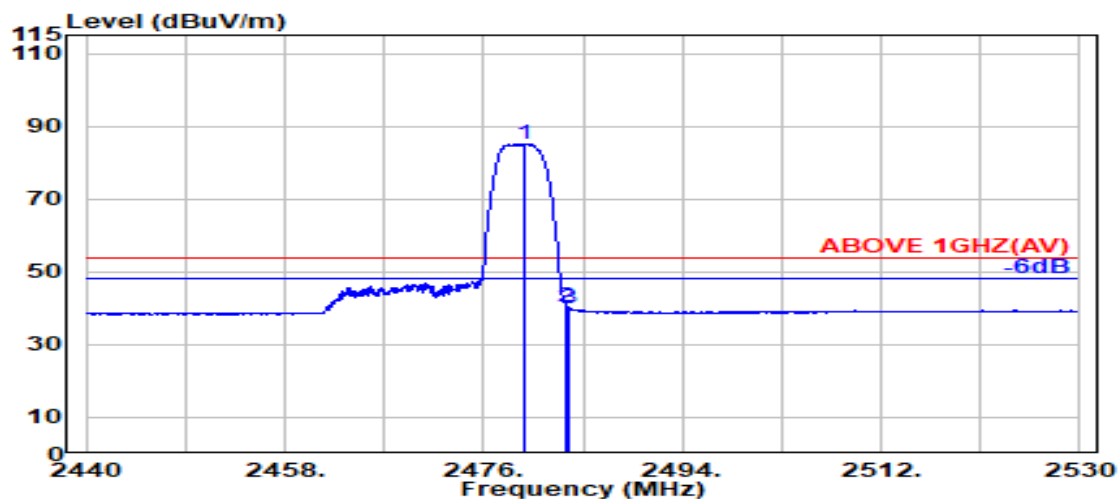

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.36	5.83	39.87	90.89	85.20	---	---	Average
2483.500	28.37	5.83	39.87	46.24	40.57	54.00	13.43	Average
2483.700	28.37	5.83	39.87	45.76	40.09	54.00	13.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

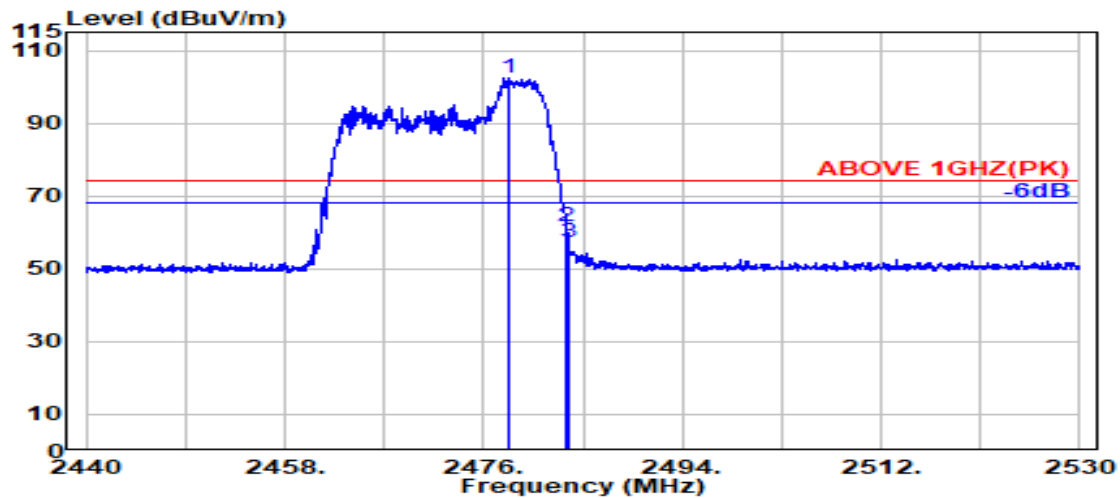

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.350	28.36	5.83	39.87	108.11	102.42	---	---	Peak
	2483.500	28.37	5.83	39.87	67.23	61.56	74.00	12.44	Peak
	2483.700	28.37	5.83	39.87	62.86	57.19	74.00	16.81	Peak

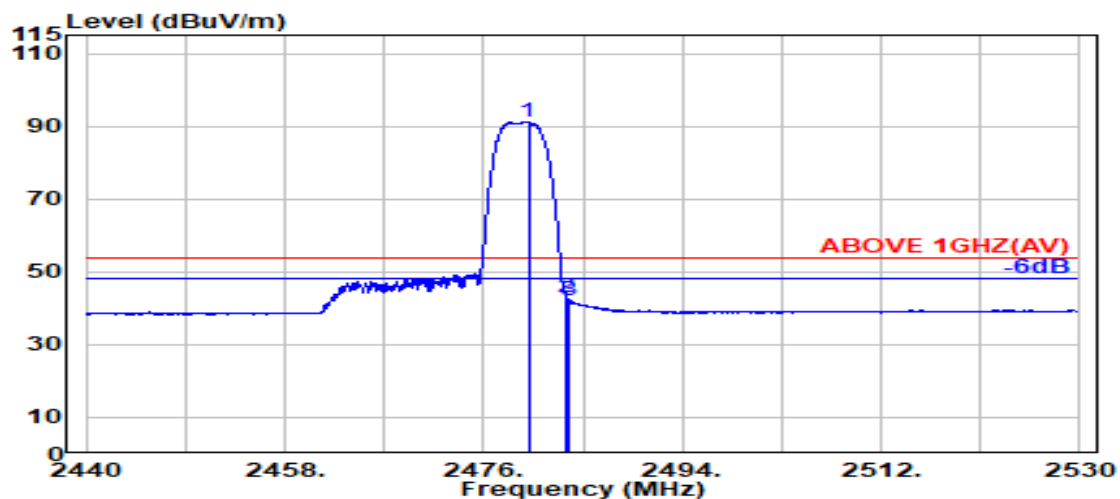

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.050	28.36	5.83	39.87	96.94	91.26	---	---	Average
	2483.500	28.37	5.83	39.87	48.80	43.12	54.00	10.88	Average
	2483.750	28.37	5.83	39.87	47.91	42.24	54.00	11.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

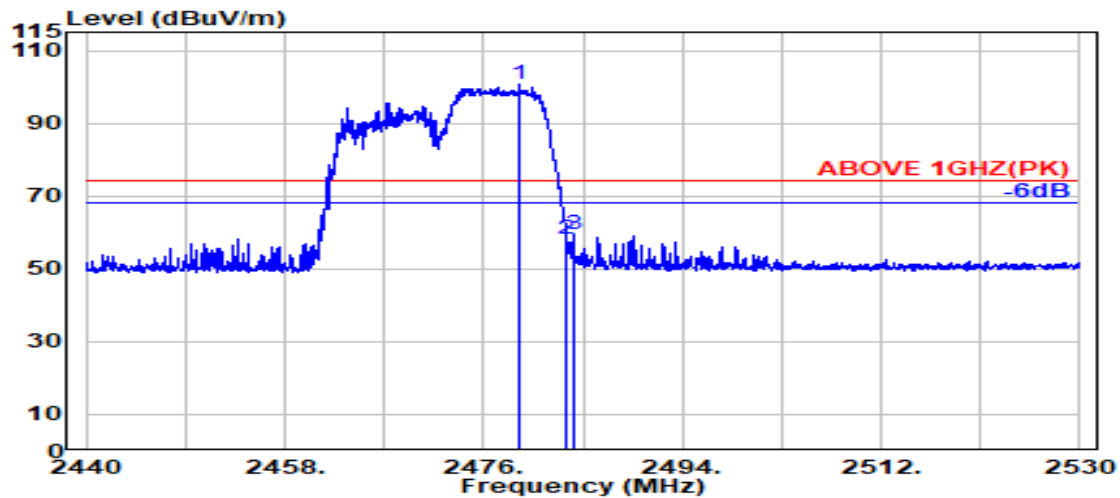

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.36	5.83	39.87	106.41	100.72	---	---	Peak
2483.500	28.37	5.83	39.87	63.71	58.04	74.00	15.96	Peak
2484.100	28.37	5.83	39.87	65.09	59.42	74.00	14.58	Peak

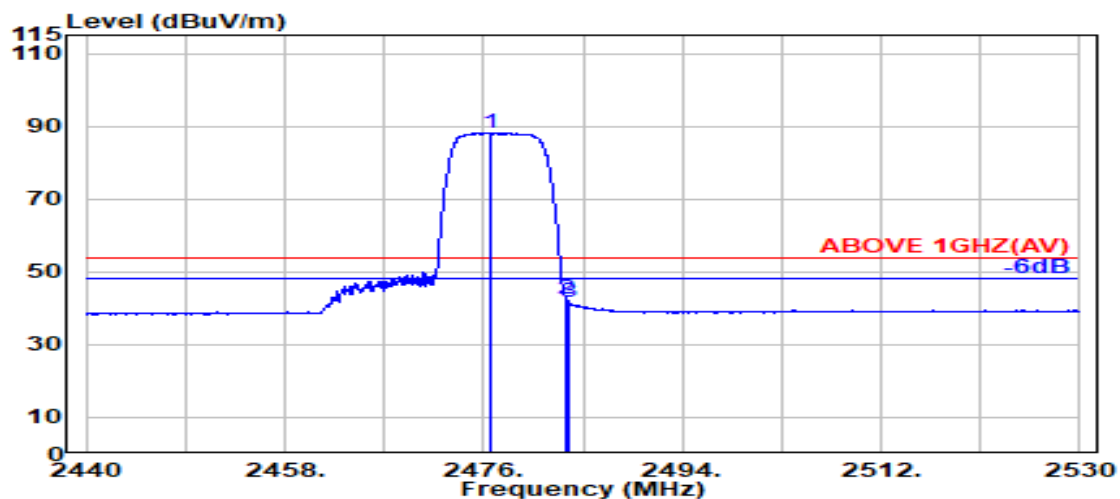

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.650	28.35	5.82	39.87	93.98	88.28	---	---	Average
2483.500	28.37	5.83	39.87	48.07	42.39	54.00	11.61	Average
2483.700	28.37	5.83	39.87	47.22	41.55	54.00	12.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

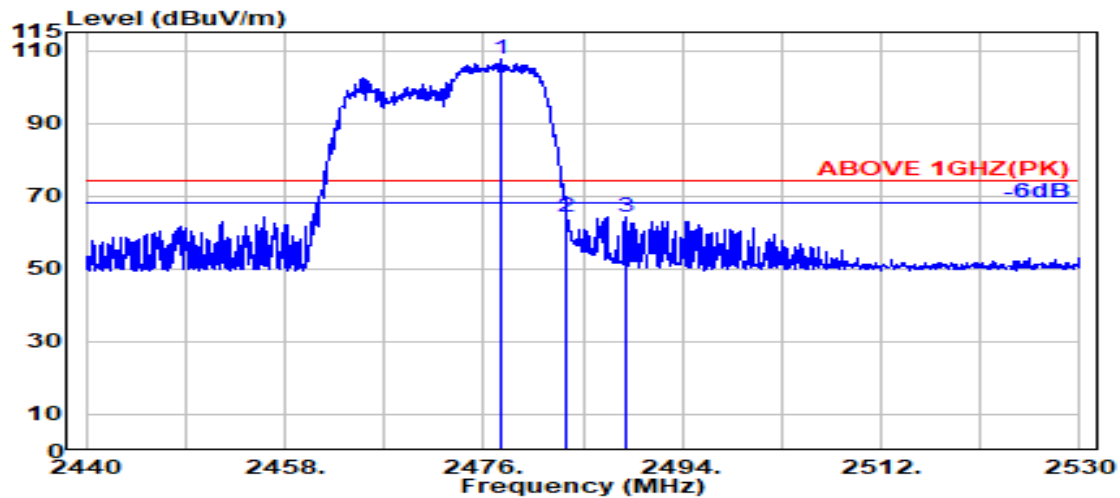

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.36	5.82	39.87	113.14	107.45	---	---	Peak
2483.500	28.37	5.83	39.87	69.77	64.09	74.00	9.91	Peak
2488.800	28.38	5.84	39.87	69.86	64.20	74.00	9.80	Peak

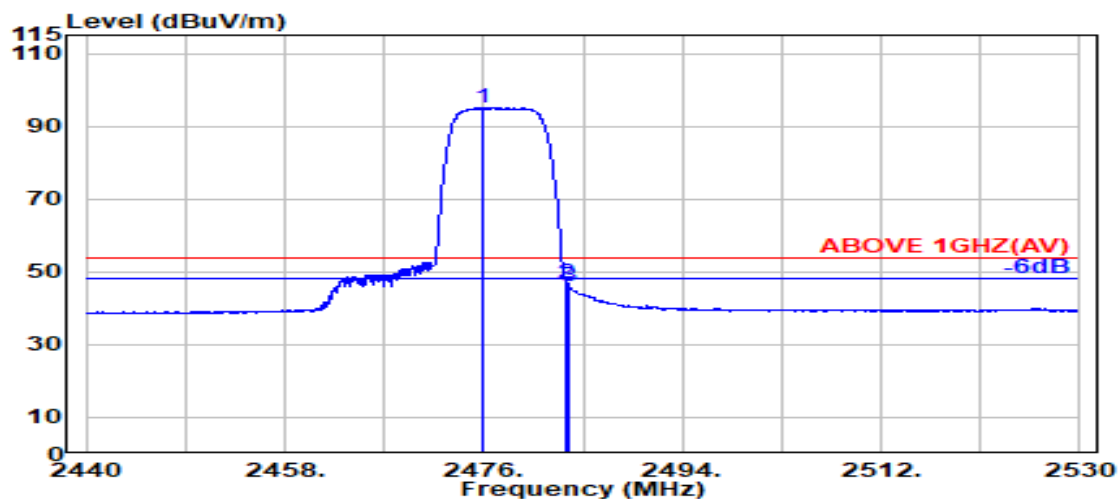

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.850	28.35	5.82	39.87	100.82	95.12	---	---	Average
2483.500	28.37	5.83	39.87	52.58	46.90	54.00	7.10	Average
2483.700	28.37	5.83	39.87	51.53	45.86	54.00	8.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

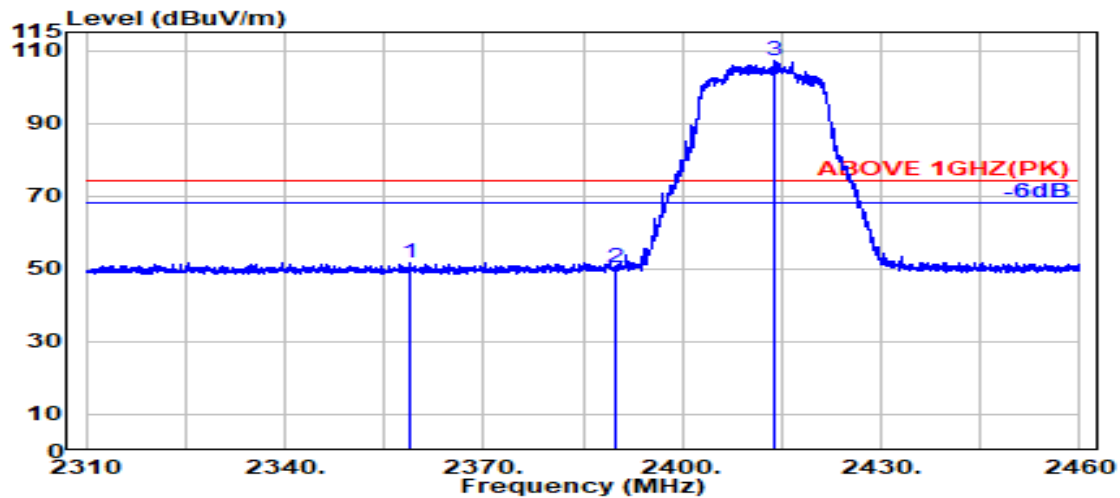

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2359.050	28.26	5.68	39.88	57.77	51.84	74.00	22.16	Peak
2389.800	28.14	5.72	39.88	56.23	50.21	74.00	23.79	Peak
@ 2414.050	28.16	5.75	39.88	112.98	107.01	---	---	Peak

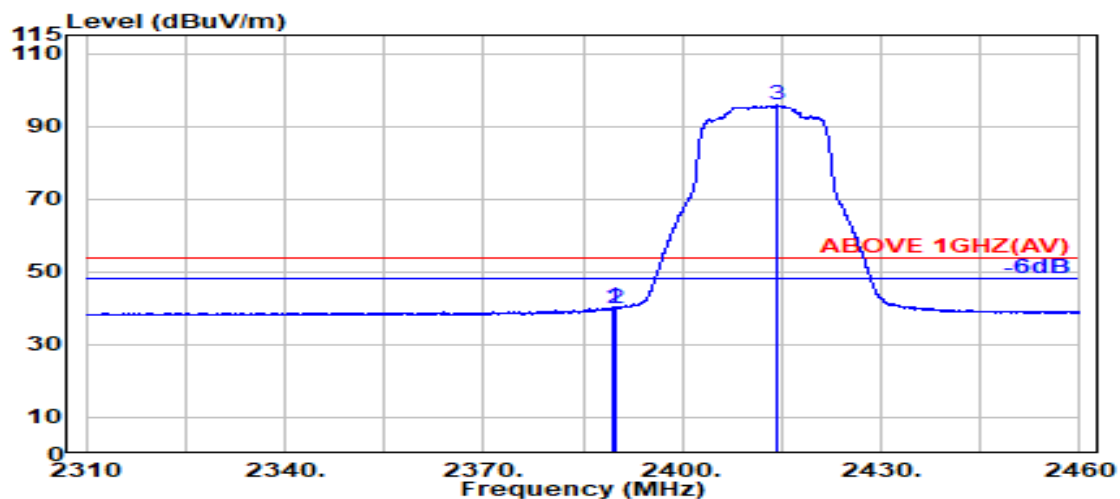

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	46.31	40.29	54.00	13.71	Average
2389.800	28.14	5.72	39.88	46.09	40.07	54.00	13.93	Average
@ 2414.400	28.16	5.75	39.88	101.67	95.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

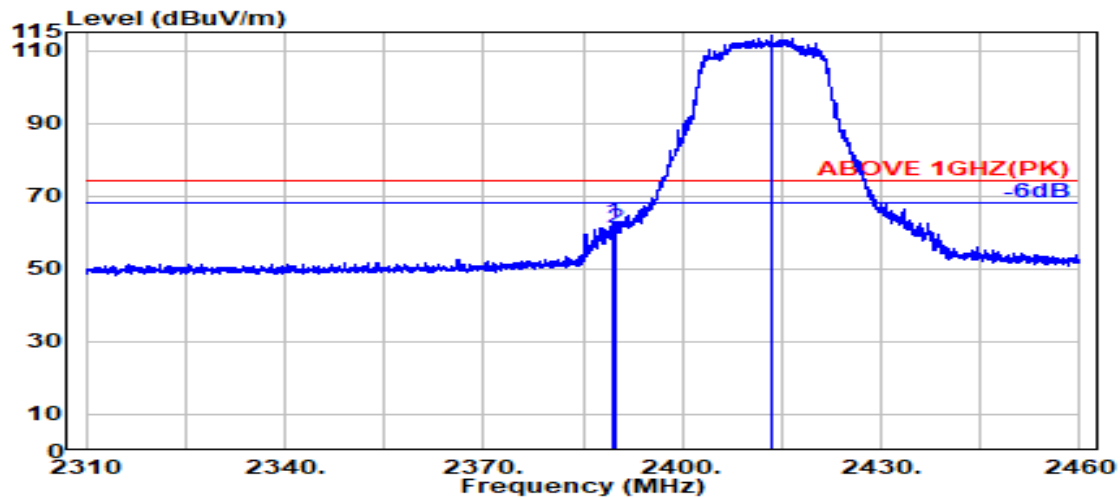

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	69.05	63.04	74.00	10.96	Peak
2389.800	28.14	5.72	39.88	67.26	61.24	74.00	12.76	Peak
@ 2413.350	28.15	5.75	39.88	119.94	113.96	---	---	Peak

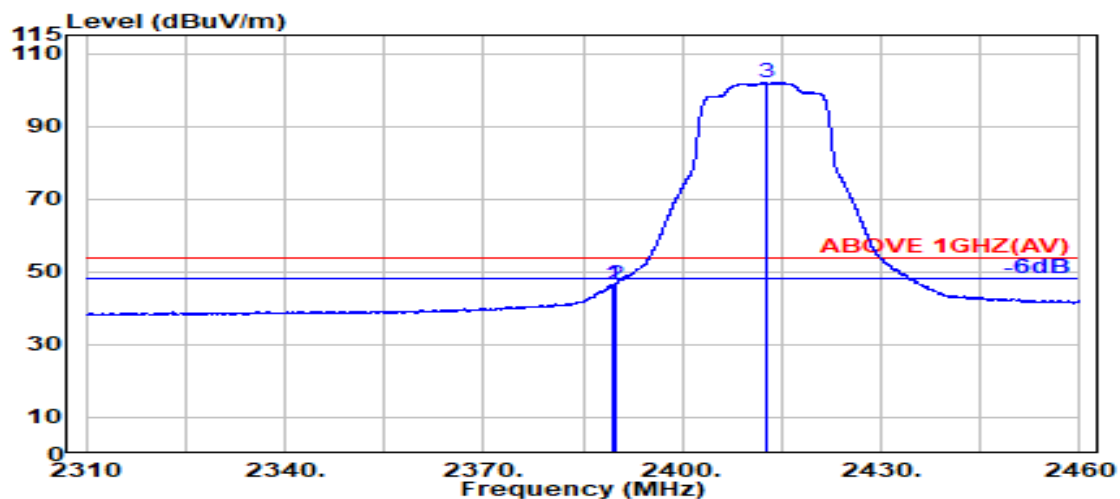

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	52.58	46.56	54.00	7.44	Average
2389.800	28.14	5.72	39.88	52.63	46.62	54.00	7.38	Average
@ 2412.600	28.15	5.75	39.88	107.88	101.90	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

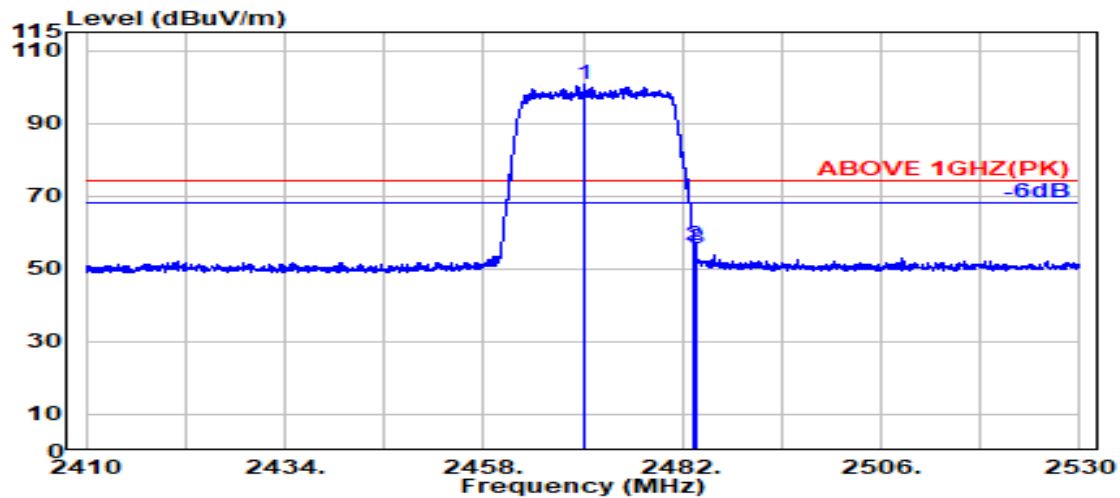

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.100	28.34	5.82	39.87	106.50	100.79	---	---	Peak
	2483.500	28.37	5.83	39.87	62.02	56.34	74.00	17.66	Peak
	2483.700	28.37	5.83	39.87	61.25	55.58	74.00	18.42	Peak

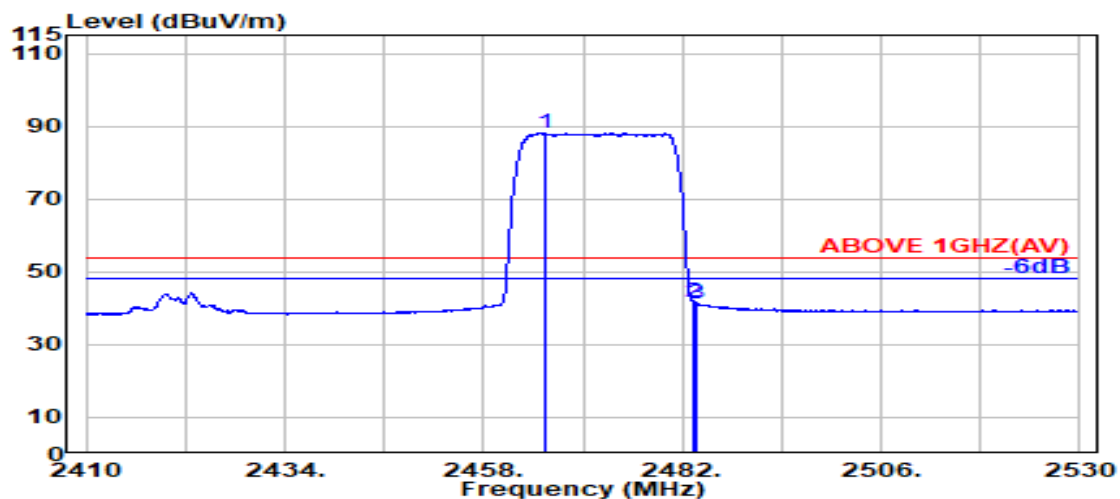

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.350	28.33	5.81	39.87	93.83	88.10	---	---	Average
	2483.500	28.37	5.83	39.87	47.34	41.67	54.00	12.33	Average
	2483.700	28.37	5.83	39.87	47.10	41.43	54.00	12.57	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

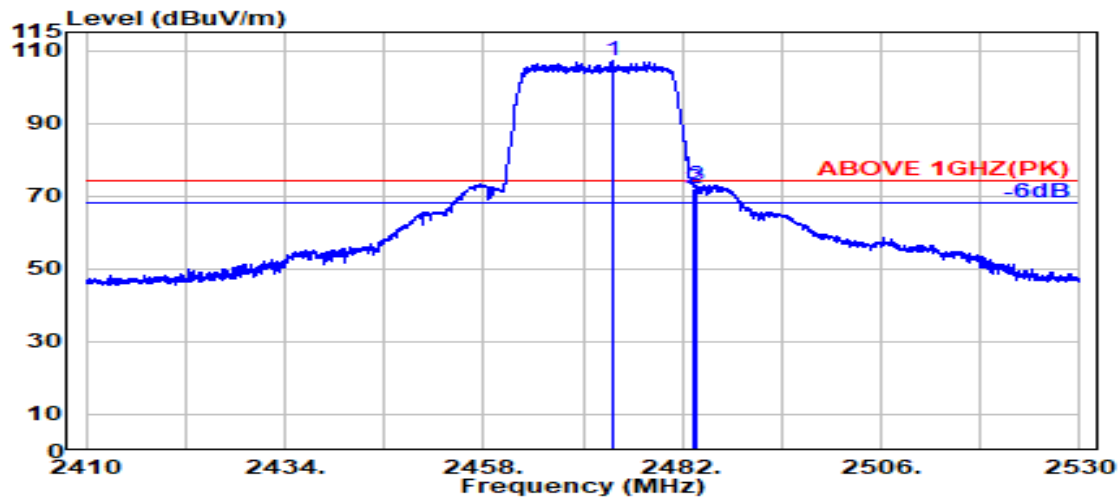

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.480	28.35	5.82	39.87	112.90	107.19	---	---	Peak
	2483.500	28.37	5.83	39.87	77.56	71.89	74.00	2.11	Peak
	2483.760	28.37	5.83	39.87	78.61	72.94	74.00	1.06	Peak

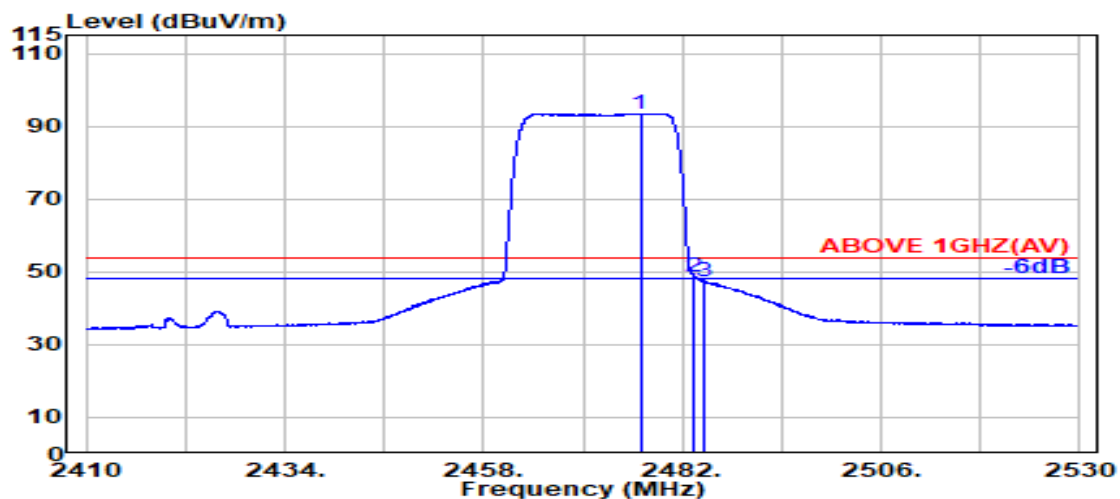

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.920	28.35	5.82	39.87	99.18	93.48	---	---	Average
	2483.500	28.37	5.83	39.87	54.09	48.42	54.00	5.58	Average
	2484.720	28.37	5.83	39.87	53.03	47.36	54.00	6.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

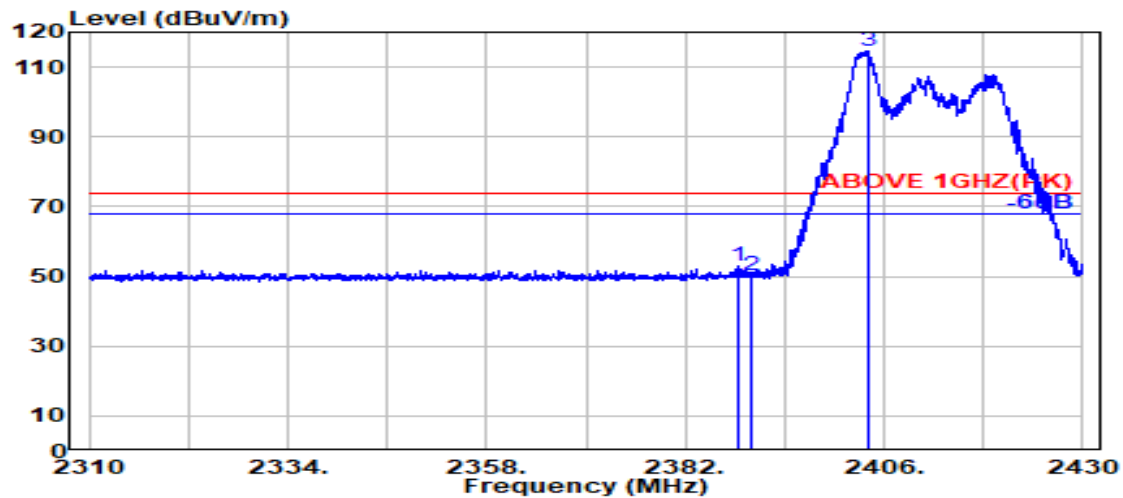

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.15	5.72	39.88	58.78	52.77	74.00	21.23	Peak
2390.000	28.14	5.72	39.88	56.50	50.48	74.00	23.52	Peak
@ 2404.050	28.12	5.74	39.88	120.76	114.74	---	---	Peak

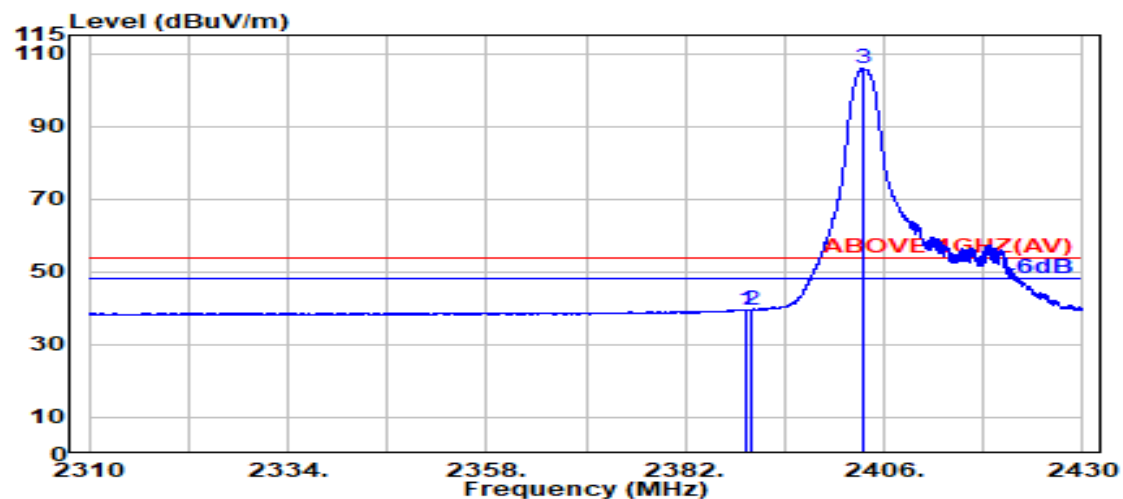

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	45.70	39.68	54.00	14.32	Average
2390.000	28.14	5.72	39.88	45.50	39.48	54.00	14.52	Average
@ 2403.500	28.11	5.74	39.88	111.85	105.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

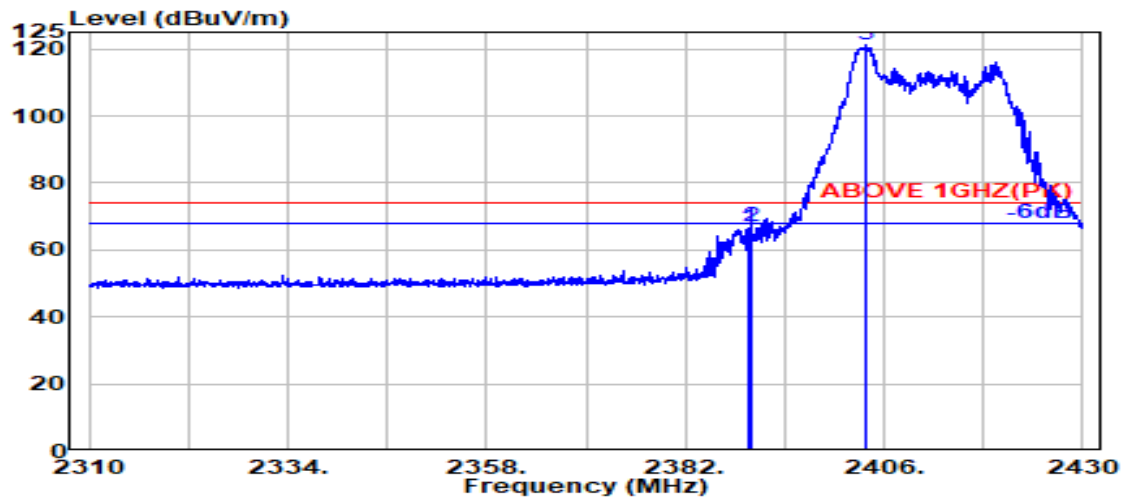

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	72.67	66.66	74.00	7.34	Peak
2390.000	28.14	5.72	39.88	72.95	66.94	74.00	7.06	Peak
@ 2403.700	28.11	5.74	39.88	127.06	121.03	---	---	Peak

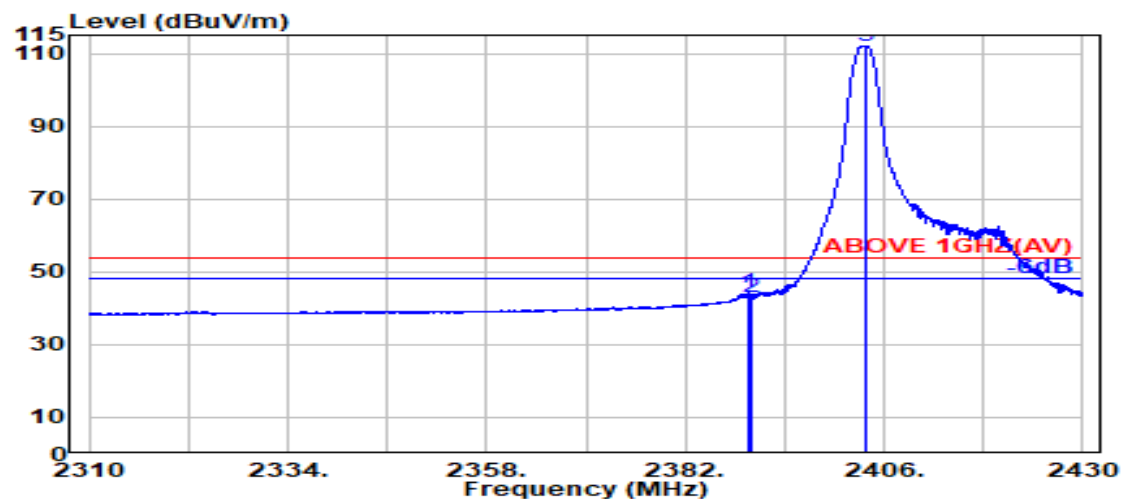

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.13	44.11	54.00	9.89	Average
2390.000	28.14	5.72	39.88	49.08	43.07	54.00	10.93	Average
@ 2403.800	28.12	5.74	39.88	118.20	112.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

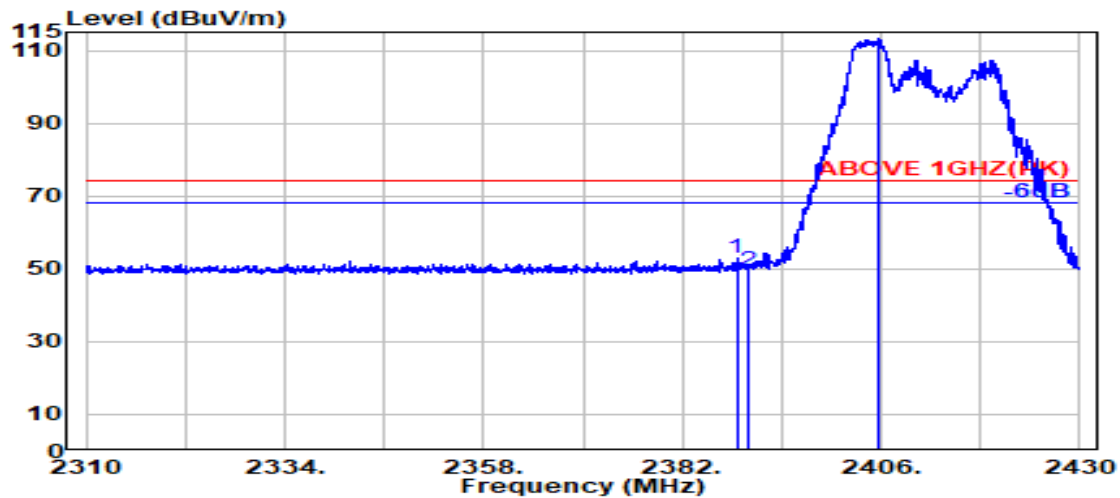

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.550	28.15	5.72	39.88	58.85	52.84	74.00	21.16	Peak
2390.000	28.14	5.72	39.88	55.40	49.38	74.00	24.62	Peak
@ 2405.700	28.12	5.74	39.88	119.37	113.35	---	---	Peak

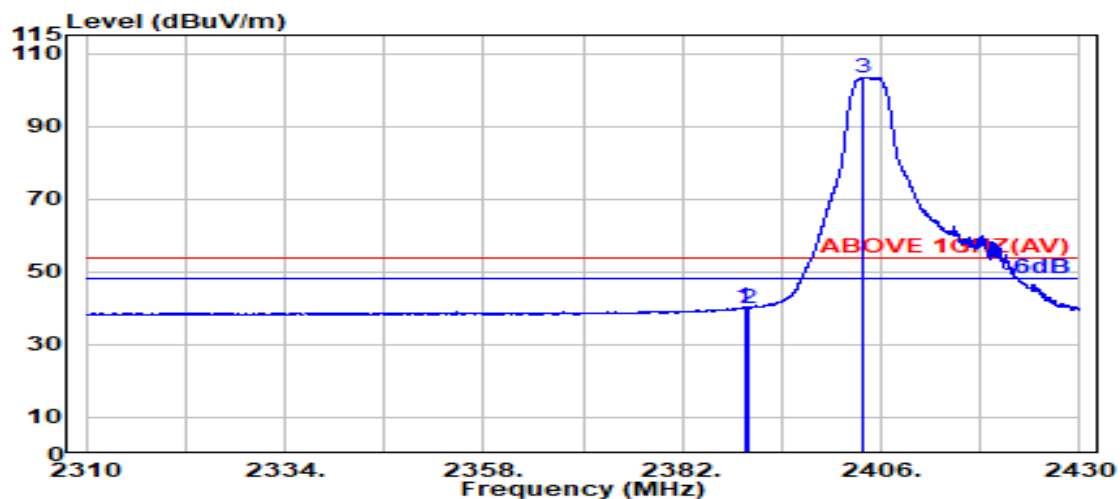

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	46.26	40.24	54.00	13.76	Average
2390.000	28.14	5.72	39.88	45.98	39.96	54.00	14.04	Average
@ 2403.700	28.11	5.74	39.88	109.41	103.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

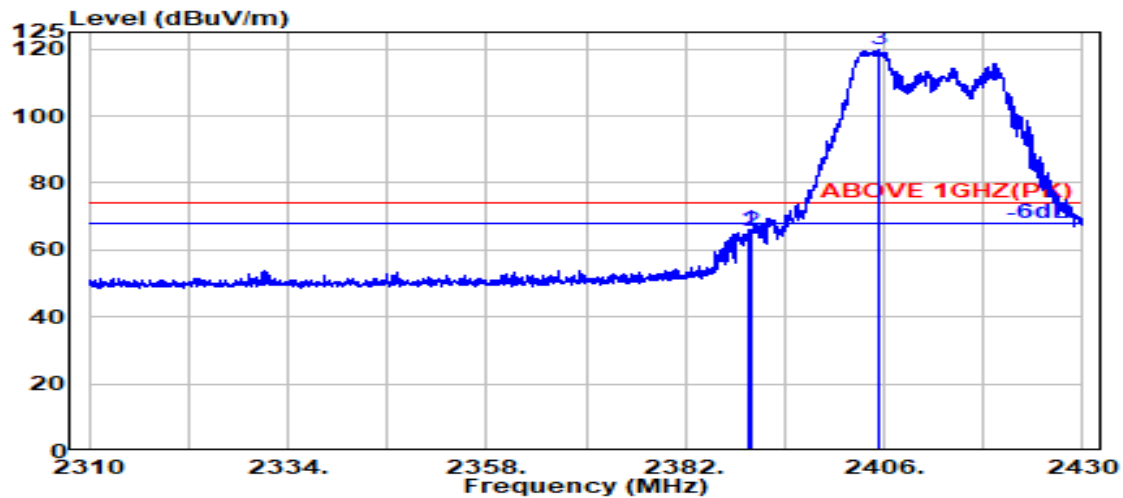

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	71.90	65.89	74.00	8.11	Peak
2390.000	28.14	5.72	39.88	71.38	65.36	74.00	8.64	Peak
@ 2405.250	28.12	5.74	39.88	125.73	119.71	---	---	Peak

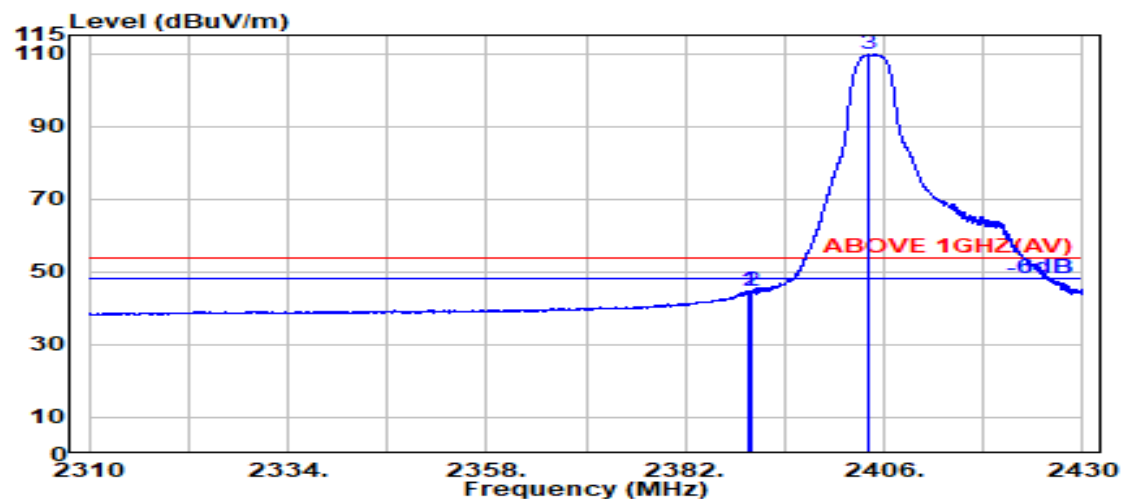

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.76	44.75	54.00	9.25	Average
2390.000	28.14	5.72	39.88	50.84	44.82	54.00	9.18	Average
@ 2404.150	28.12	5.74	39.88	115.66	109.63	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

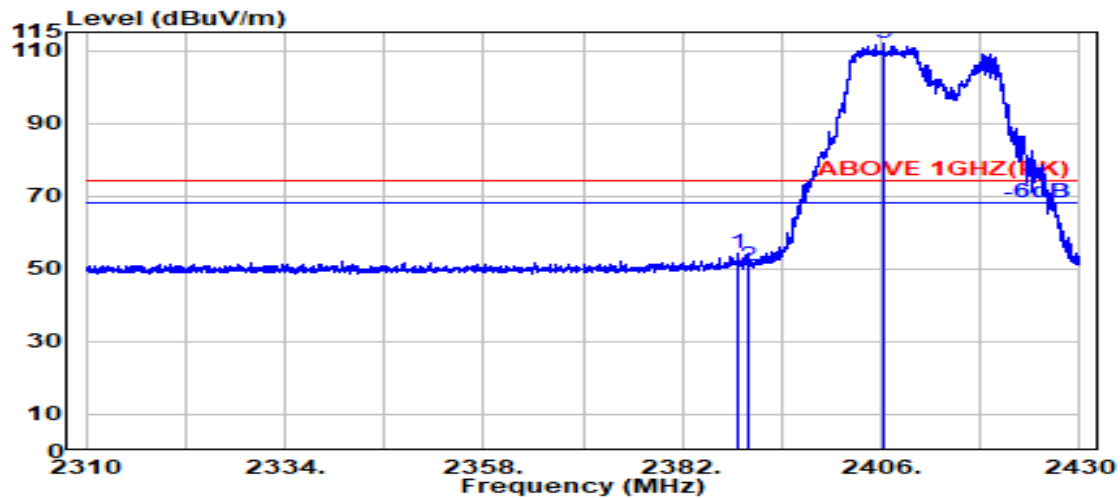

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.88	60.23	54.21	74.00	19.79	Peak
2390.000	28.14	5.72	39.88	56.75	50.73	74.00	23.27	Peak
@ 2406.250	28.13	5.74	39.88	117.88	111.87	---	---	Peak

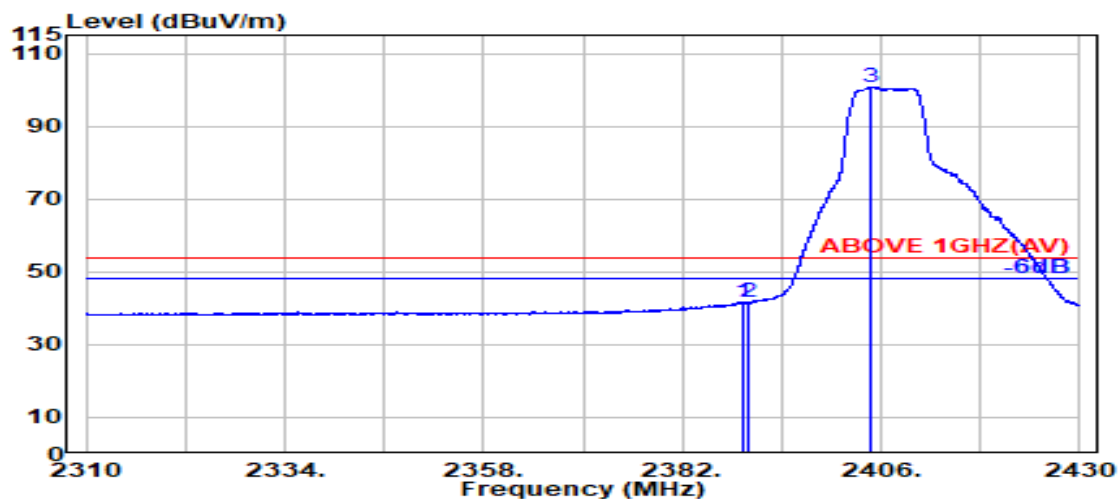

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	47.52	41.51	54.00	12.49	Average
2390.000	28.14	5.72	39.88	47.49	41.47	54.00	12.53	Average
@ 2404.650	28.12	5.74	39.88	106.85	100.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

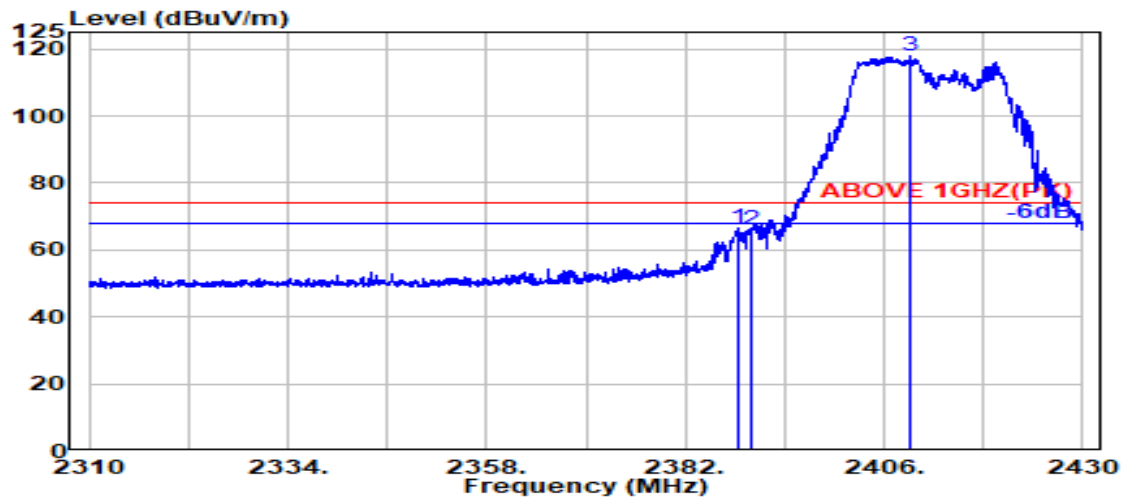

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	72.55	66.54	74.00	7.46	Peak
2390.000	28.14	5.72	39.88	72.03	66.01	74.00	7.99	Peak
@ 2409.050	28.14	5.74	39.88	123.75	117.75	---	---	Peak

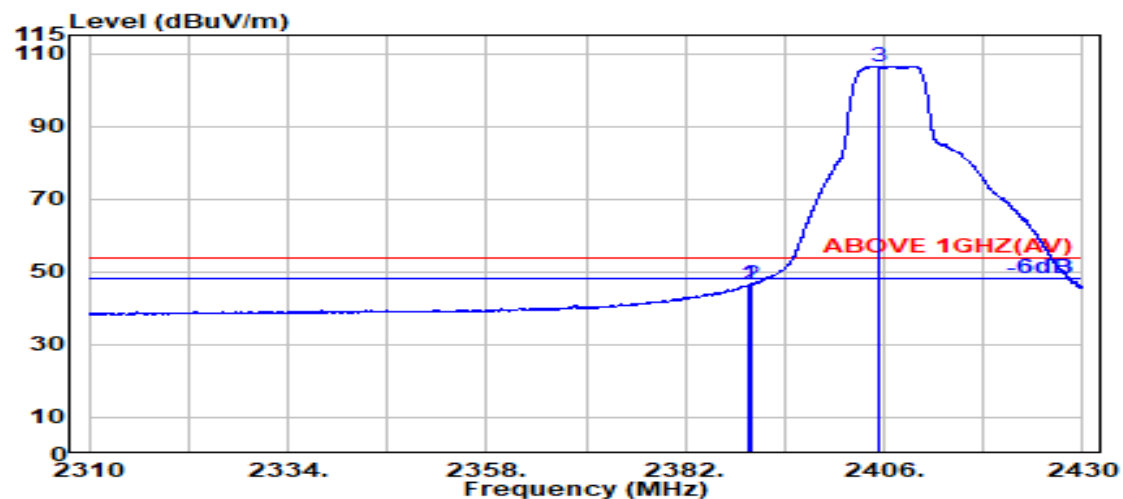

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	52.53	46.51	54.00	7.49	Average
2390.000	28.14	5.72	39.88	52.52	46.50	54.00	7.50	Average
@ 2405.500	28.12	5.74	39.88	112.48	106.47	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

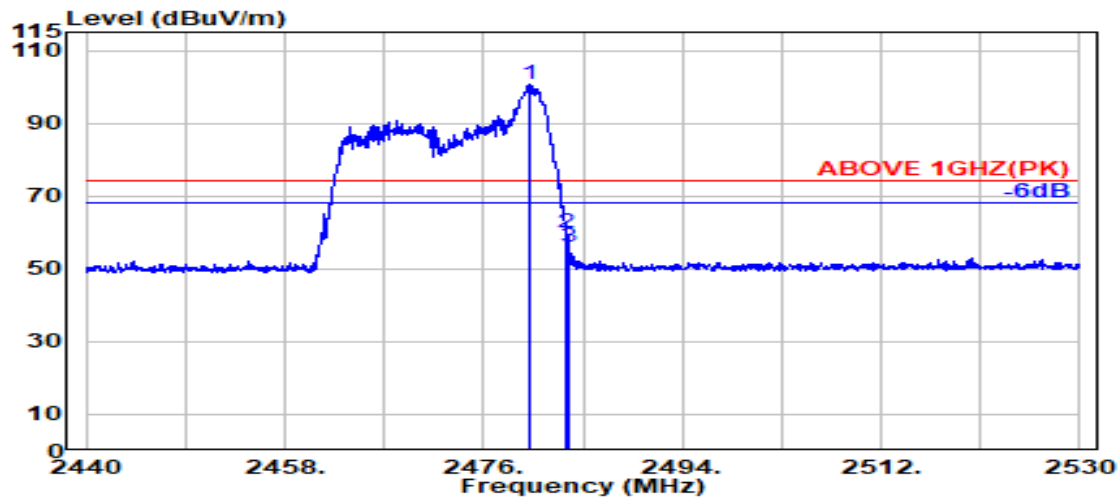

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.150	28.36	5.83	39.87	106.32	100.64	---	---	Peak
	2483.500	28.37	5.83	39.87	65.46	59.78	74.00	14.22	Peak
	2483.700	28.37	5.83	39.87	61.81	56.14	74.00	17.86	Peak

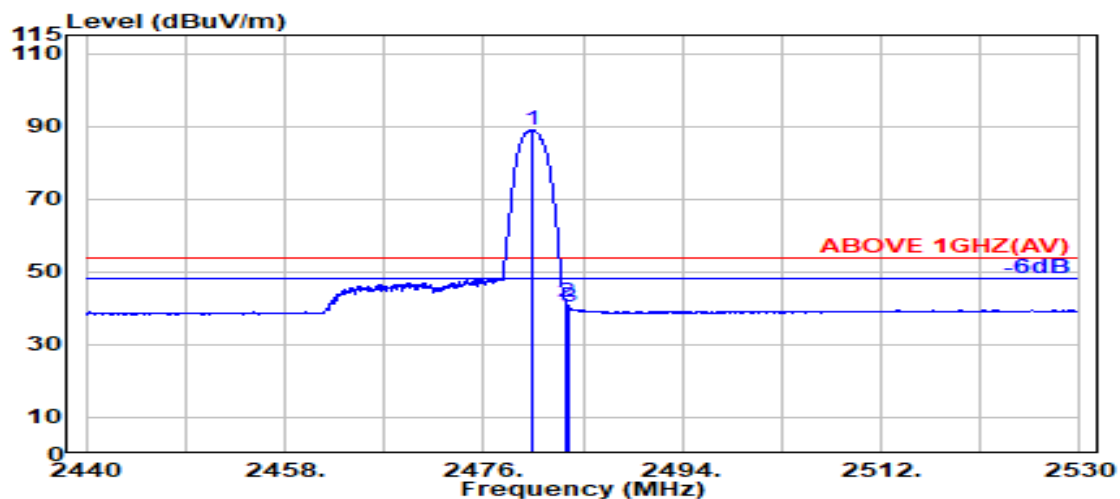

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.350	28.36	5.83	39.87	94.72	89.03	---	---	Average
	2483.500	28.37	5.83	39.87	47.35	41.68	54.00	12.32	Average
	2483.700	28.37	5.83	39.87	46.10	40.43	54.00	13.57	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

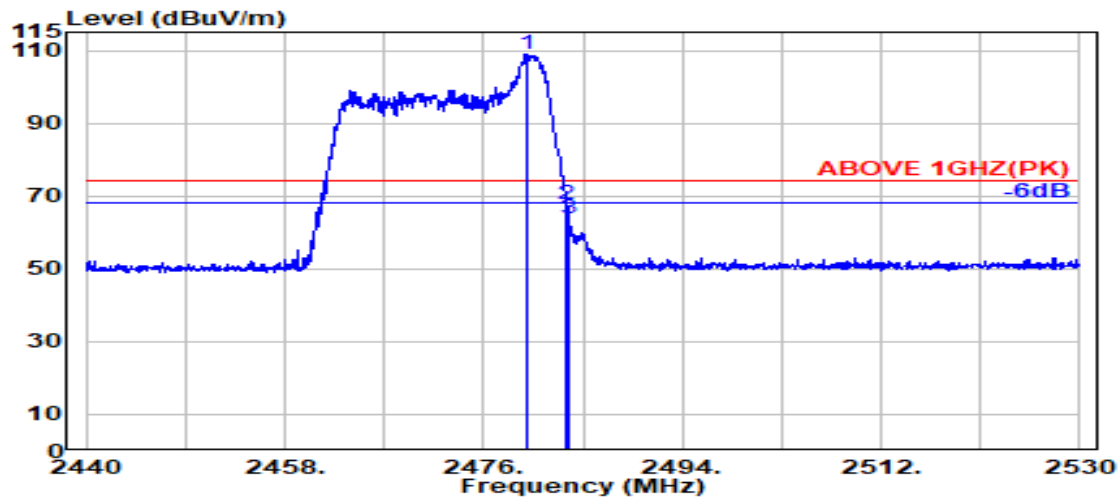

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2479.950	28.36	5.83	39.87	114.76	109.07	---	---	Peak
	2483.500	28.37	5.83	39.87	73.52	67.84	74.00	6.16	Peak
	2483.700	28.37	5.83	39.87	69.28	63.61	74.00	10.39	Peak

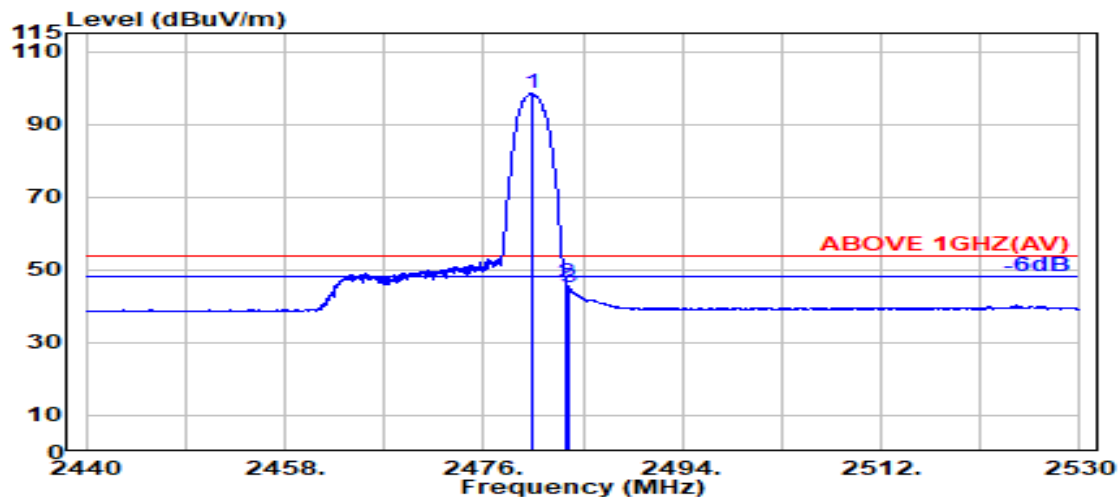

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.350	28.36	5.83	39.87	104.02	98.33	---	---	Average
	2483.500	28.37	5.83	39.87	52.28	46.61	54.00	7.39	Average
	2483.700	28.37	5.83	39.87	50.91	45.24	54.00	8.76	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

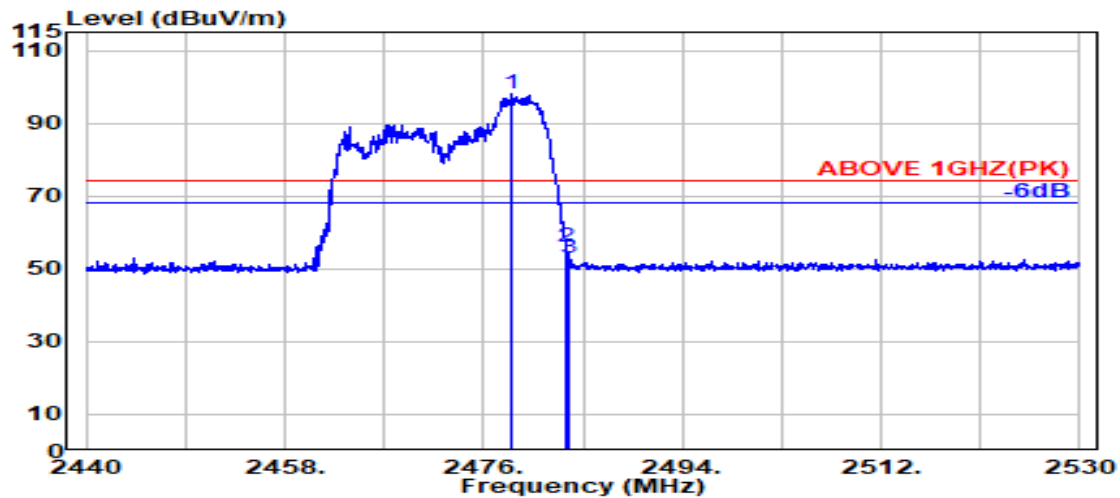

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.550	28.36	5.83	39.87	103.68	97.99	---	---	Peak
2483.500	28.37	5.83	39.87	61.61	55.94	74.00	18.06	Peak
2483.700	28.37	5.83	39.87	58.58	52.91	74.00	21.09	Peak

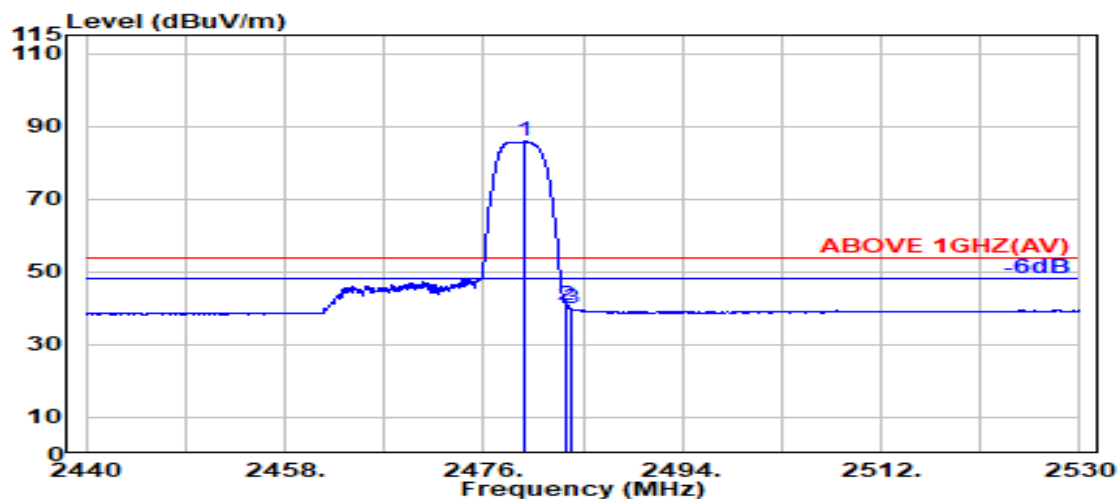

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.750	28.36	5.83	39.87	91.52	85.84	---	---	Average
2483.500	28.37	5.83	39.87	46.52	40.85	54.00	13.15	Average
2483.900	28.37	5.83	39.87	45.74	40.07	54.00	13.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

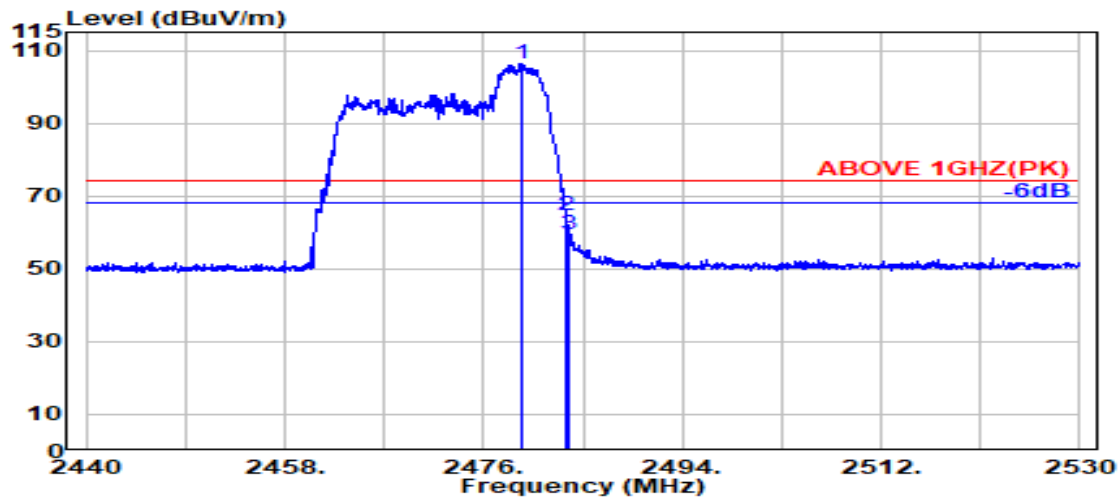

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.36	5.83	39.87	111.89	106.21	---	---	Peak
2483.500	28.37	5.83	39.87	70.45	64.77	74.00	9.23	Peak
2483.800	28.37	5.83	39.87	65.09	59.42	74.00	14.58	Peak

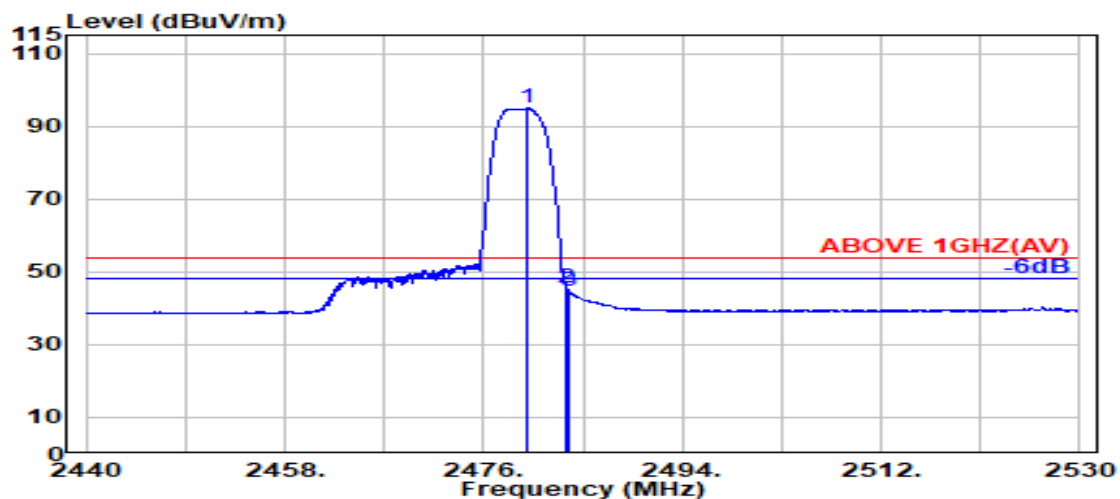

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	100.63	94.95	---	---	Average
2483.500	28.37	5.83	39.87	51.24	45.57	54.00	8.43	Average
2483.750	28.37	5.83	39.87	50.37	44.69	54.00	9.31	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

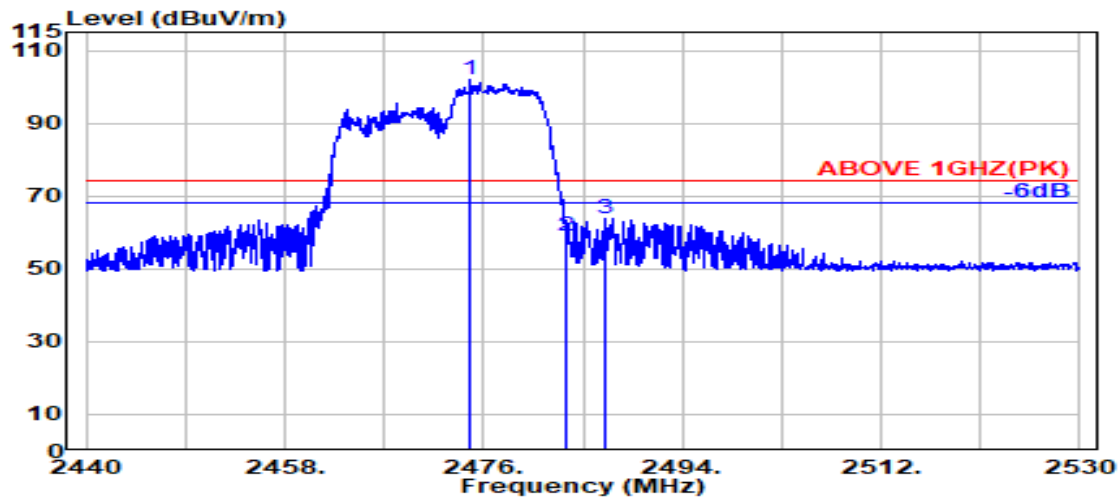

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.850	28.35	5.82	39.87	107.70	102.00	---	---	Peak
	2483.500	28.37	5.83	39.87	64.62	58.94	74.00	15.06	Peak
	2486.950	28.37	5.83	39.87	69.53	63.87	74.00	10.13	Peak

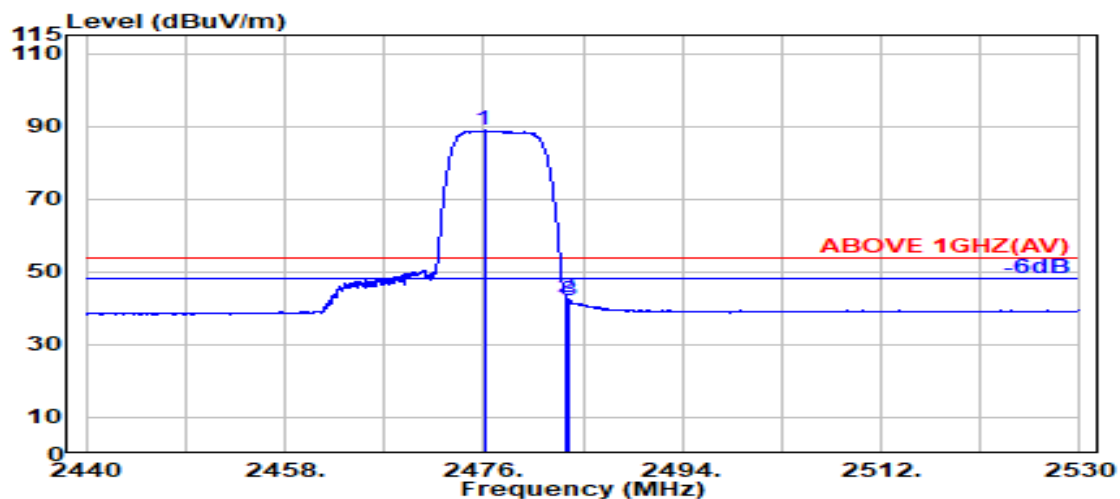

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.050	28.35	5.82	39.87	94.45	88.76	---	---	Average
	2483.500	28.37	5.83	39.87	48.53	42.85	54.00	11.15	Average
	2483.700	28.37	5.83	39.87	47.98	42.31	54.00	11.69	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

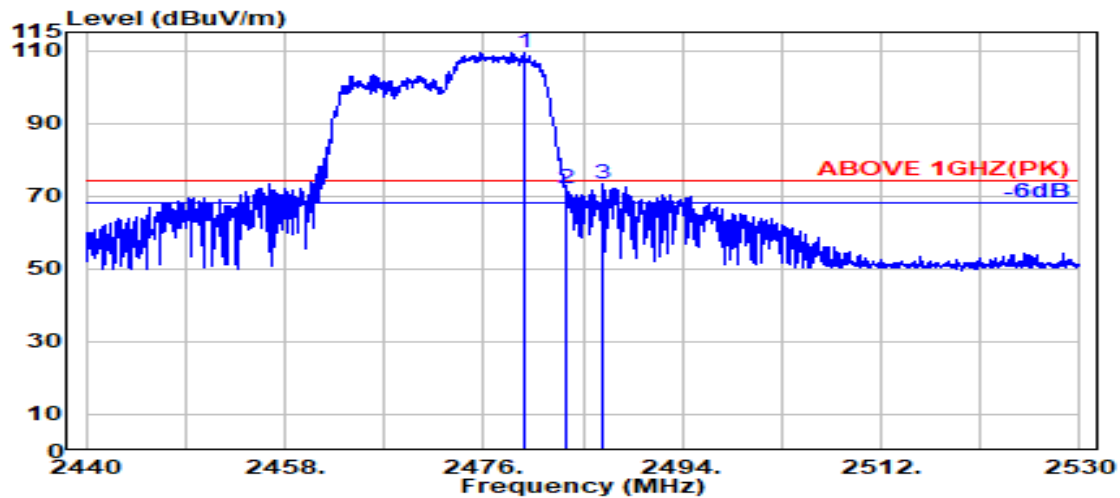

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.700	28.36	5.83	39.87	114.87	109.19	---	---	Peak
2483.500	28.37	5.83	39.87	77.81	72.13	74.00	1.87	Peak
2486.750	28.37	5.83	39.87	79.03	73.37	74.00	0.63	Peak

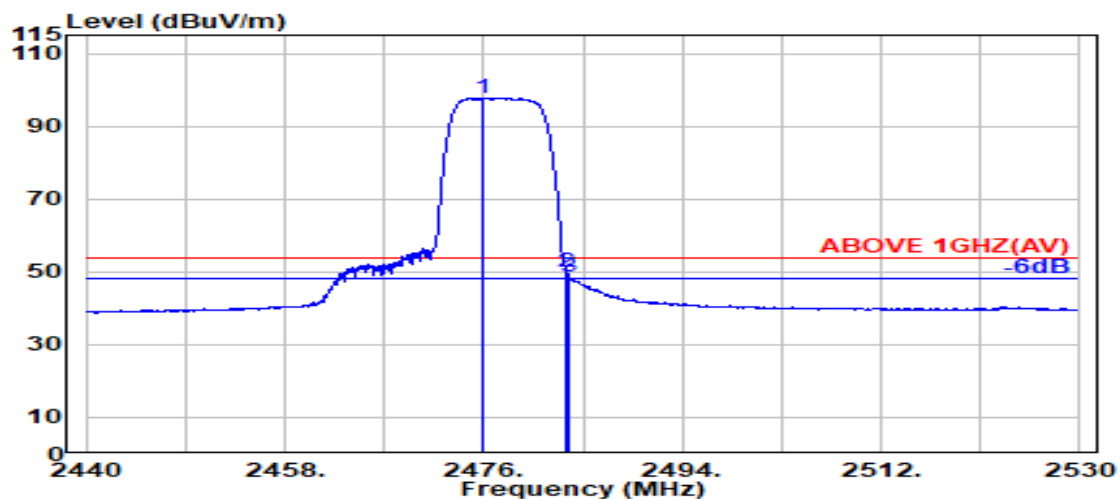

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.000	28.35	5.82	39.87	103.47	97.78	---	---	Average
2483.500	28.37	5.83	39.87	55.50	49.83	54.00	4.17	Average
2483.700	28.37	5.83	39.87	54.48	48.80	54.00	5.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

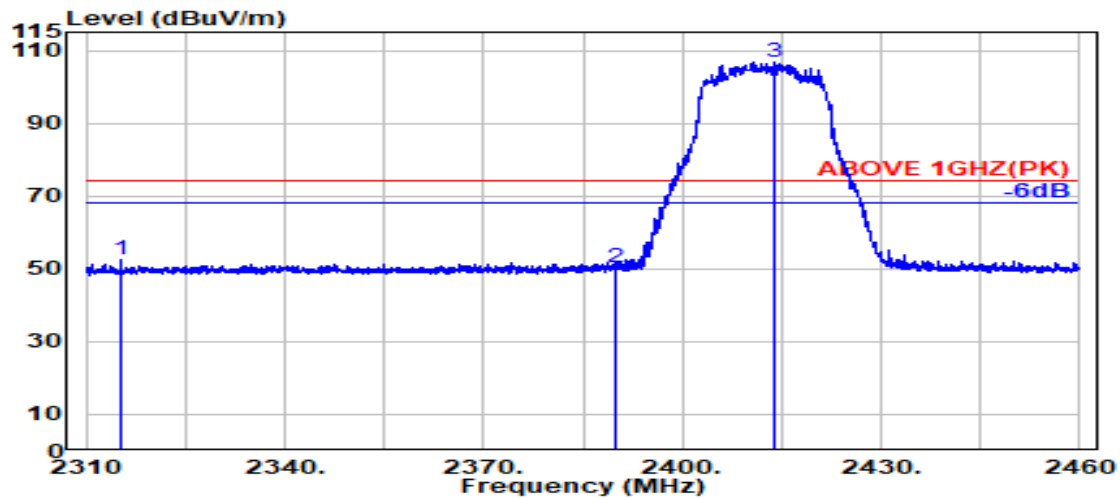

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2315.200	28.09	5.63	39.88	58.62	52.46	74.00	21.54	Peak
2389.800	28.14	5.72	39.88	56.49	50.47	74.00	23.53	Peak
@ 2413.950	28.16	5.75	39.88	112.77	106.79	---	---	Peak

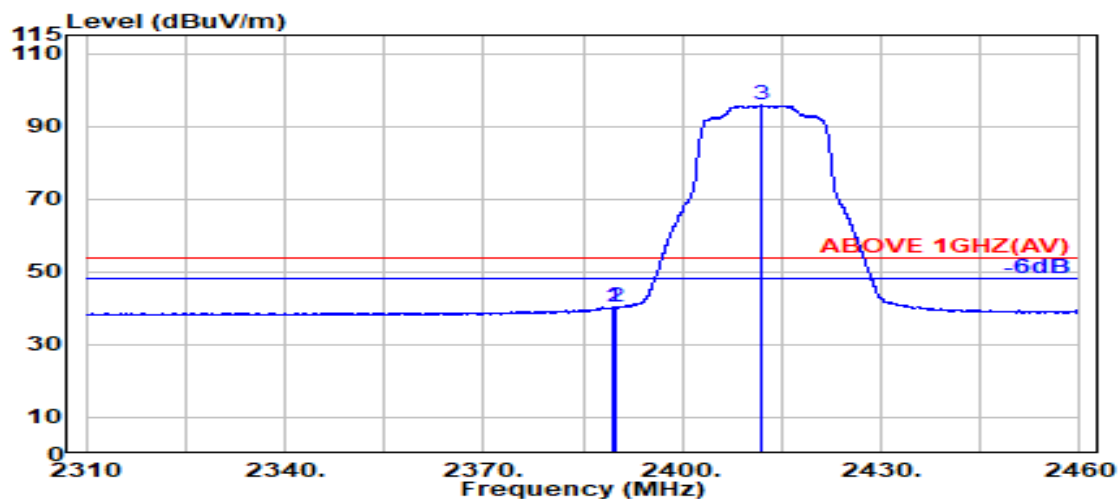

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	46.20	40.19	54.00	13.81	Average
2389.800	28.14	5.72	39.88	46.20	40.19	54.00	13.81	Average
@ 2411.950	28.15	5.75	39.88	101.75	95.77	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

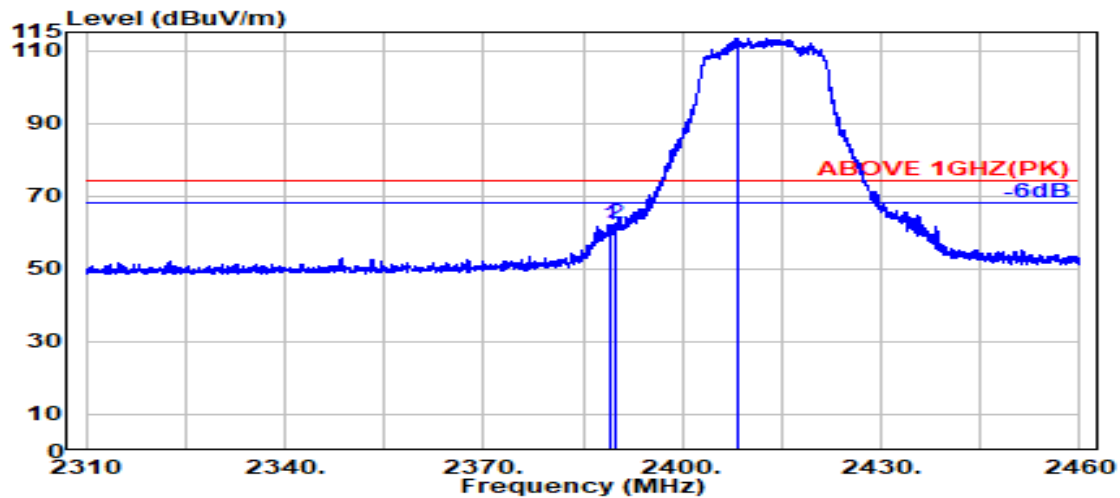

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	68.16	62.15	74.00	11.85	Peak
2389.800	28.14	5.72	39.88	68.41	62.39	74.00	11.61	Peak
@ 2408.200	28.13	5.74	39.88	119.34	113.34	---	---	Peak

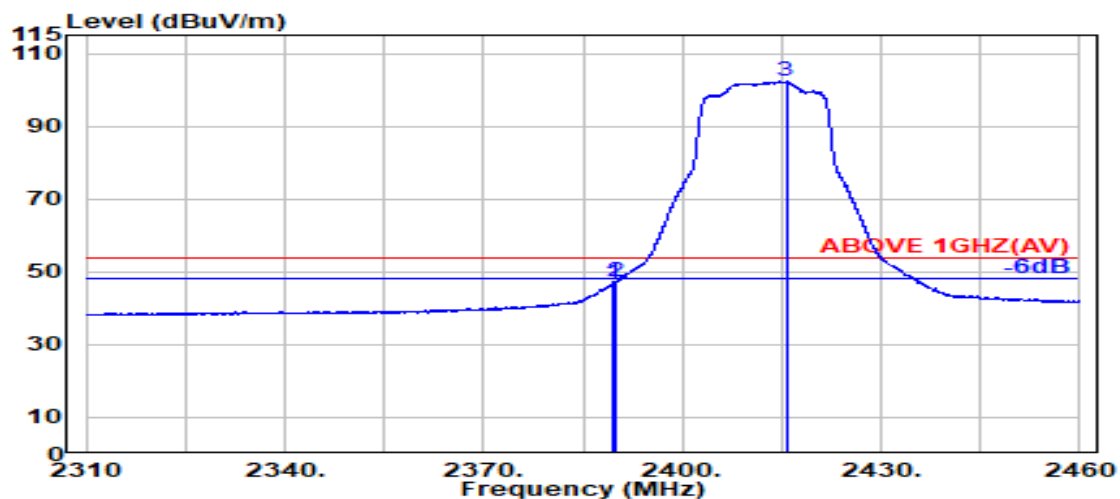

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	52.94	46.93	54.00	7.07	Average
2389.800	28.14	5.72	39.88	53.30	47.28	54.00	6.72	Average
@ 2415.650	28.16	5.75	39.88	108.25	102.29	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

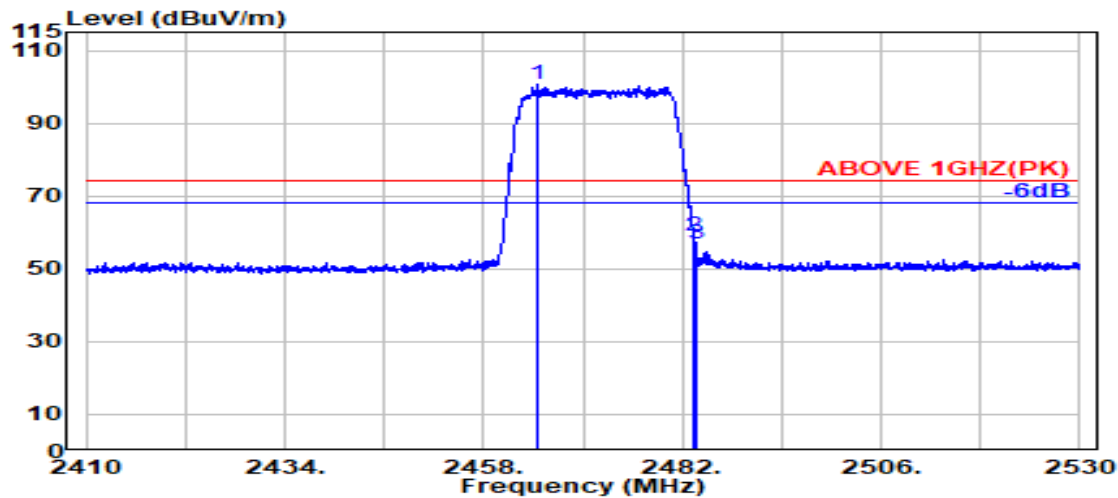

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.550	28.33	5.81	39.87	106.56	100.82	---	---	Peak
2483.500	28.37	5.83	39.87	64.50	58.83	74.00	15.17	Peak
2483.700	28.37	5.83	39.87	62.47	56.80	74.00	17.20	Peak

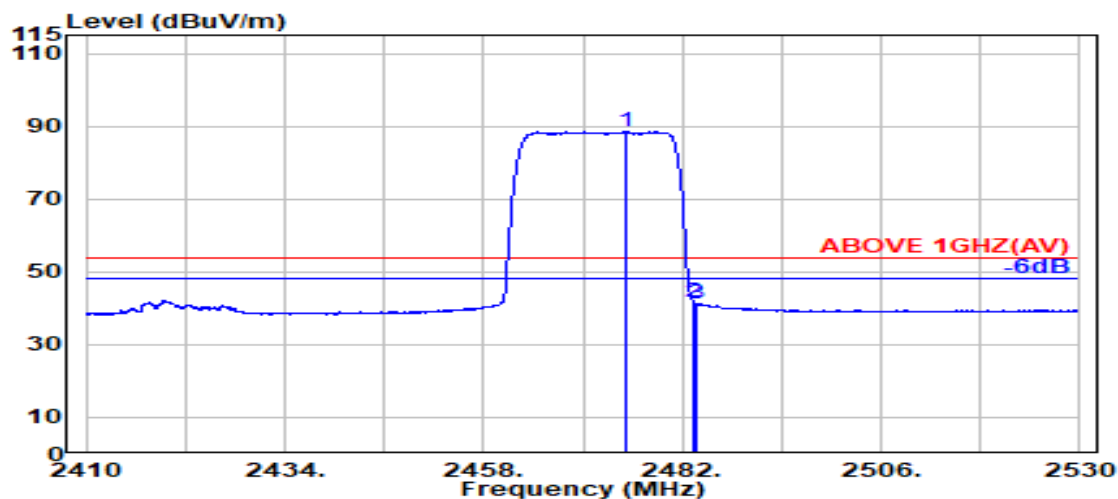

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.050	28.35	5.82	39.87	94.19	88.49	---	---	Average
2483.500	28.37	5.83	39.87	47.22	41.55	54.00	12.45	Average
2483.700	28.37	5.83	39.87	47.07	41.39	54.00	12.61	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

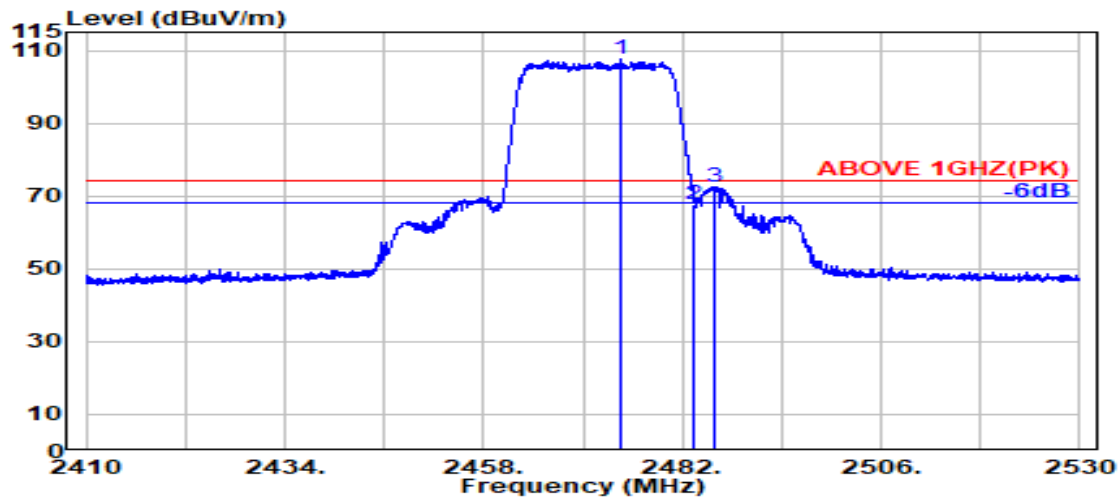

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.560	28.35	5.82	39.87	113.26	107.56	---	---	Peak
	2483.500	28.37	5.83	39.87	73.51	67.84	74.00	6.16	Peak
	2485.760	28.37	5.83	39.87	78.09	72.43	74.00	1.57	Peak

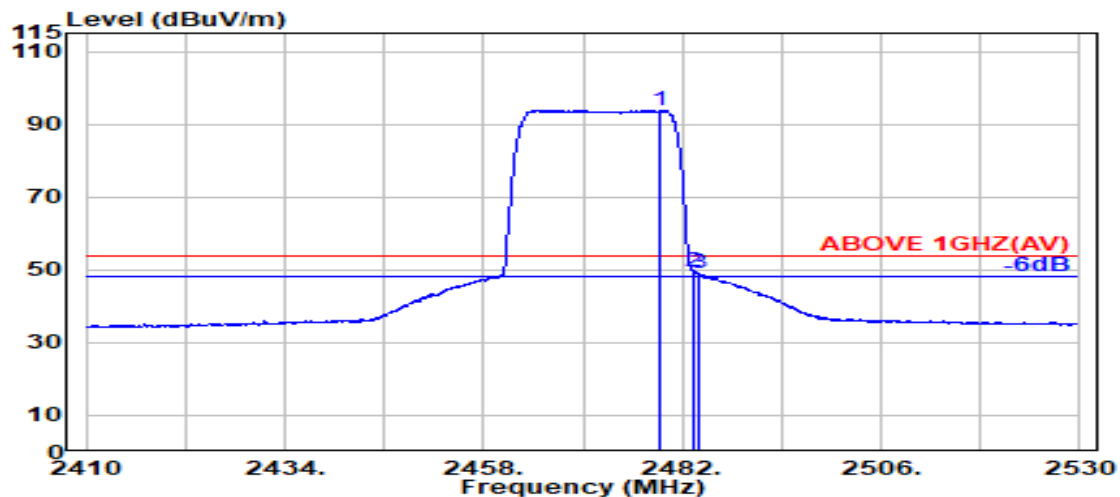

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.400	28.36	5.83	39.87	99.57	93.88	---	---	Average
	2483.500	28.37	5.83	39.87	55.23	49.55	54.00	4.45	Average
	2483.960	28.37	5.83	39.87	54.67	49.00	54.00	5.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

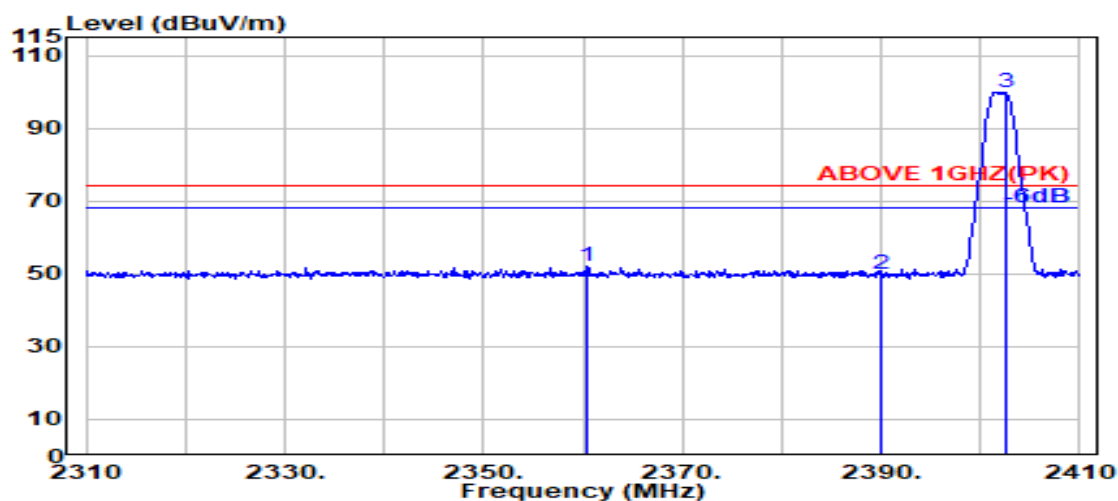

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2360.500	28.26	5.69	39.88	57.88	51.94	74.00	22.06	Peak
2390.000	28.14	5.72	39.88	55.71	49.70	74.00	24.30	Peak
@ 2402.500	28.11	5.74	39.88	105.93	99.90	---	---	Peak

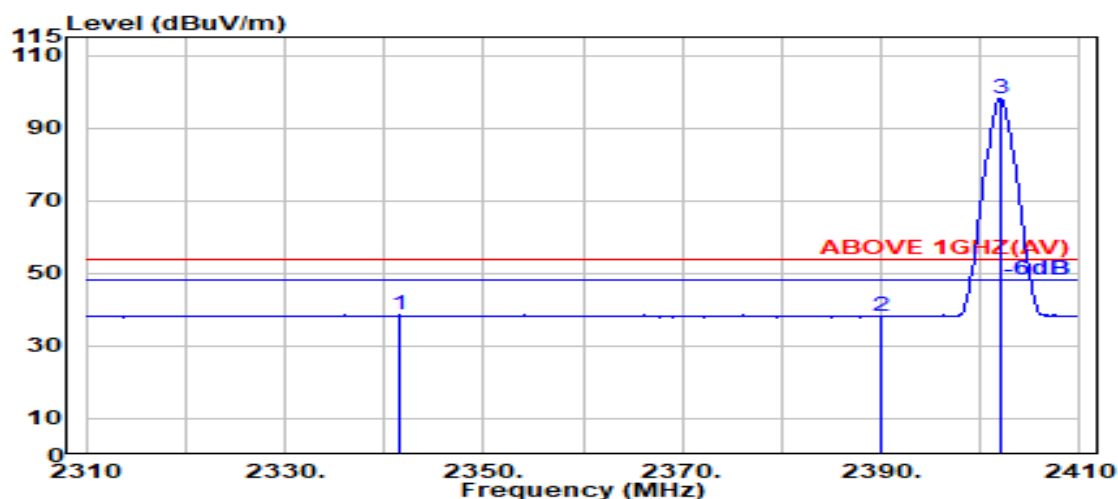

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.500	28.25	5.66	39.88	44.42	38.45	54.00	15.55	Average
2390.000	28.14	5.72	39.88	44.11	38.10	54.00	15.90	Average
@ 2402.000	28.11	5.74	39.88	104.26	98.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

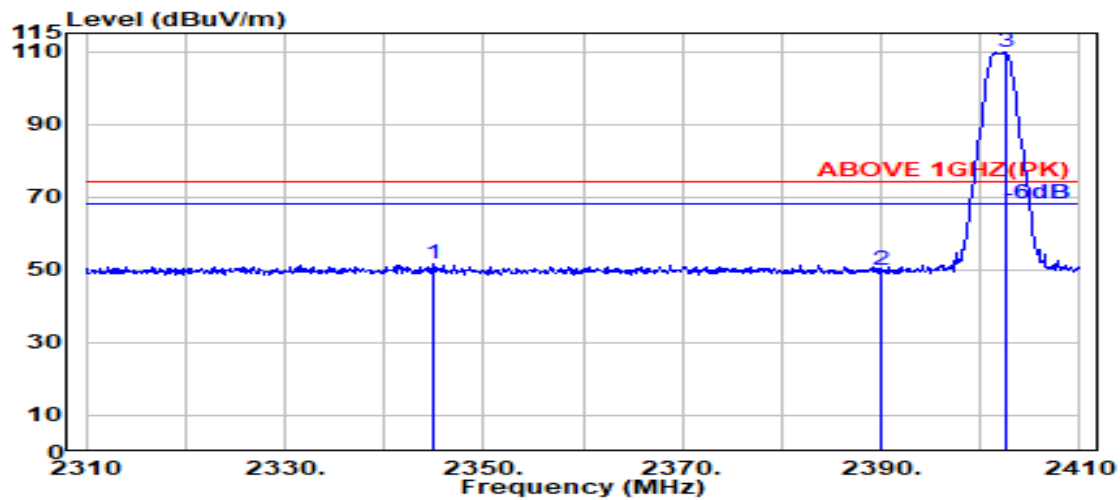

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2345.000	28.27	5.67	39.88	57.52	51.58	74.00	22.42	Peak
2390.000	28.14	5.72	39.88	55.98	49.97	74.00	24.03	Peak
@ 2402.500	28.11	5.74	39.88	115.70	109.67	---	---	Peak

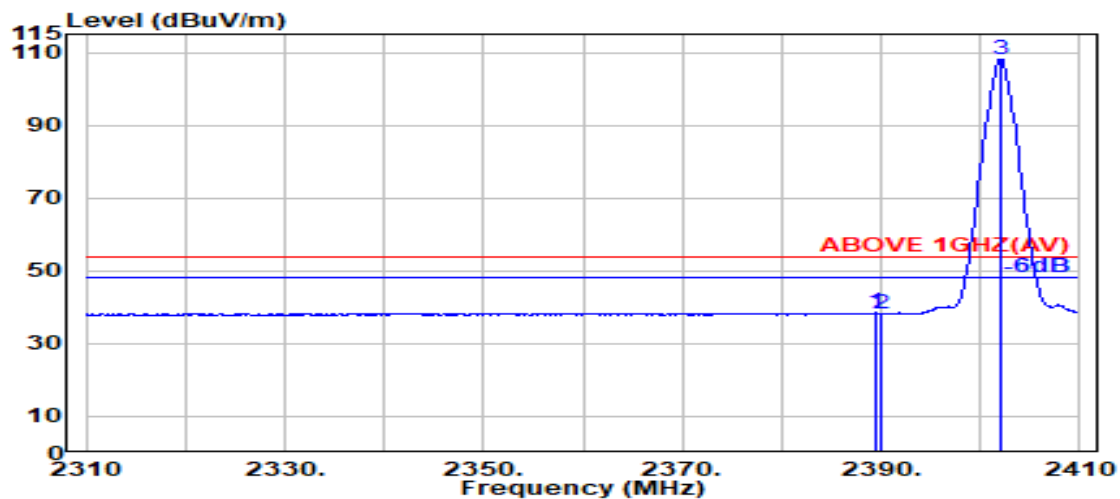

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	44.60	38.58	54.00	15.42	Average
2390.000	28.14	5.72	39.88	44.28	38.26	54.00	15.74	Average
@ 2402.000	28.11	5.74	39.88	114.11	108.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

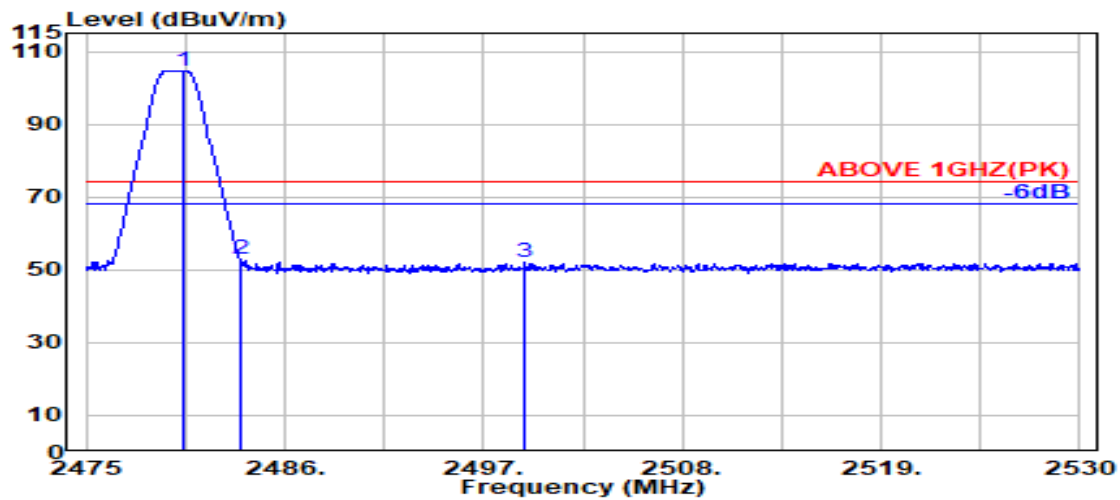

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.36	5.83	39.87	110.45	104.77	---	---	Peak
2483.500	28.37	5.83	39.87	58.40	52.73	74.00	21.27	Peak
2499.250	28.40	5.85	39.87	57.66	52.04	74.00	21.96	Peak

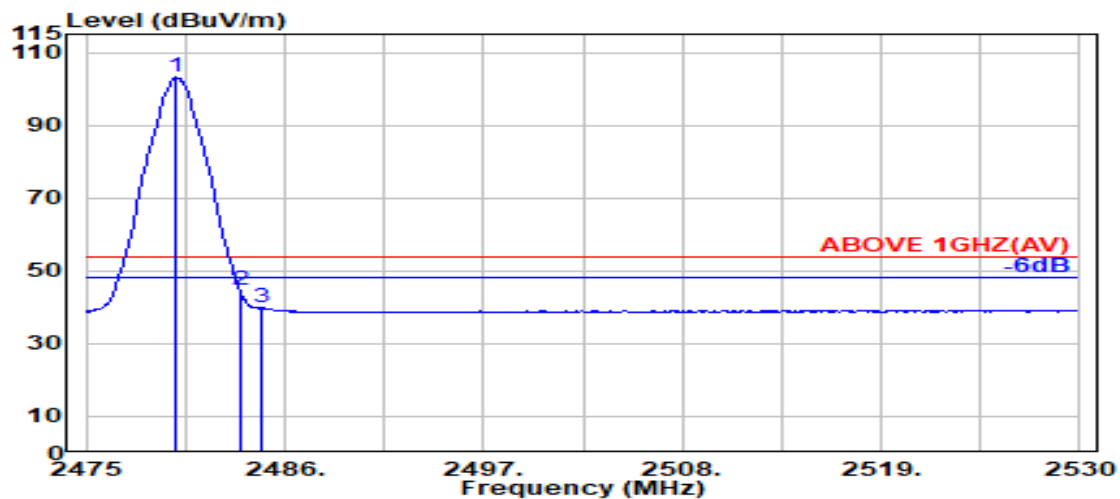

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.36	5.83	39.87	108.80	103.11	---	---	Average
2483.500	28.37	5.83	39.87	50.20	44.52	54.00	9.48	Average
2484.750	28.37	5.83	39.87	45.48	39.82	54.00	14.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

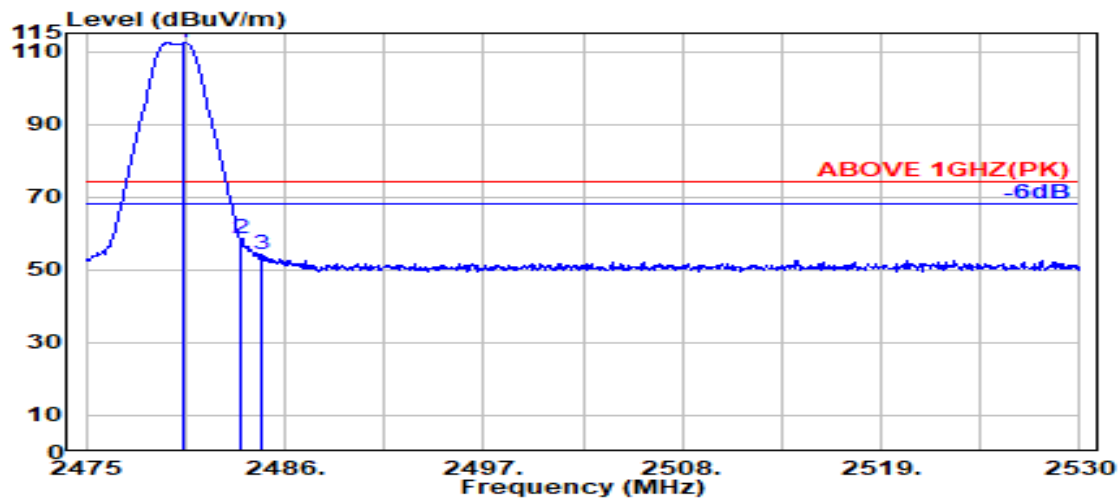

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.450	28.36	5.83	39.87	117.98	112.29	---	---	Peak
2483.500	28.37	5.83	39.87	64.28	58.61	74.00	15.39	Peak
2484.700	28.37	5.83	39.87	59.78	54.11	74.00	19.89	Peak

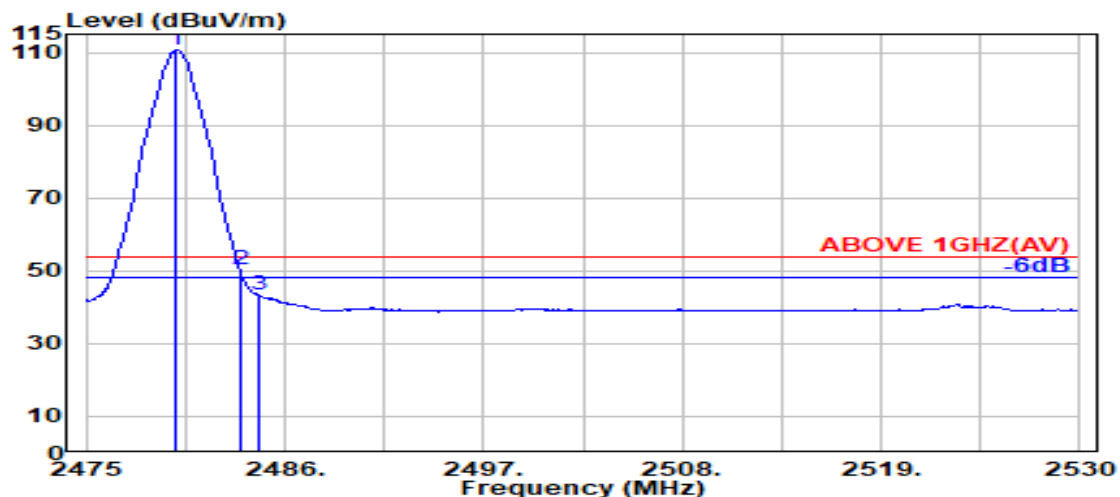

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	116.41	110.72	---	---	Average
2483.500	28.37	5.83	39.87	55.93	50.26	54.00	3.74	Average
2484.500	28.37	5.83	39.87	48.88	43.21	54.00	10.79	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.74	41.81	54.00	12.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	40.59	42.66	54.00	11.34	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.07	41.23	54.00	12.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	37.35	39.50	54.00	14.50	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.07	42.23	54.00	11.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	37.69	39.85	54.00	14.15	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2442 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	38.67	40.74	54.00	13.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	38.70	40.77	54.00	13.23	Peak

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	38.65	40.80	54.00	13.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.63	41.78	54.00	12.22	Peak

Mode	802.11ax-HE40	Frequency	TX 2442 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.31	41.38	54.00	12.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	38.98	41.05	54.00	12.95	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	37.77	39.92	54.00	14.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	37.93	40.08	54.00	13.92	Peak

Mode	802.11be-EHT40	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	38.58	40.65	54.00	13.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	40.22	42.29	54.00	11.71	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **BLE Mode**

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	39.64	41.38	54.00	12.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	40.01	41.75	54.00	12.25	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	39.61	41.66	54.00	12.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	38.75	40.81	54.00	13.19	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	38.33	40.54	54.00	13.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	37.76	39.97	54.00	14.03	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 DTS/OCCUPIED BANDWIDTH

Test Date	2025/02/06~24	Temp./Hum.	19~20°C/55~65%
Cable Loss	2.35dB	Tested By	Sean Wang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 DTS/Occupied Bandwidth Result

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		AUX	Main	AUX	Main	
802.11b	2412	9.046	9.018	13.434	13.419	>500kHz
	2442	9.032	9.019	13.462	13.444	
	2462	9.036	9.032	13.494	13.435	
	2472	9.028	9.030	13.488	13.433	
802.11g	2412	15.61	15.12	16.732	16.680	
	2442	15.13	15.88	16.752	16.676	
	2462	15.32	15.32	16.752	16.714	
	2472	16.39	16.40	16.387	16.384	
802.11n-HT20	2412	15.65	17.51	17.776	17.772	
	2442	17.51	17.53	17.758	17.804	
	2462	15.67	17.54	17.797	17.838	
	2472	17.63	17.65	17.591	17.574	
802.11n-HT40	2422	36.01	36.31	36.082	36.008	
	2442	36.03	36.31	36.101	36.094	
	2452	36.25	36.33	36.155	36.050	
	2462	36.47	36.47	36.141	36.084	
802.11ax-HE20	2412	16.26	17.80	18.908	18.906	
	2442	17.92	17.54	18.926	18.925	
	2462	17.70	17.64	18.893	18.890	
	2472	18.68	18.80	18.740	18.777	
802.11ax-HE40	2422	36.95	36.70	37.541	37.567	
	2442	37.29	37.18	37.627	37.610	
	2452	37.36	37.42	37.631	37.545	
	2462	37.97	37.91	37.616	37.595	
802.11be-EHT20	2412	9.046	9.018	13.434	13.419	
	2442	9.032	9.019	13.462	13.444	
	2462	9.036	9.032	13.494	13.435	
	2472	9.028	9.030	13.488	13.433	
802.11be-EHT40	2422	38.86	37.79	37.566	37.582	
	2442	37.54	37.90	37.549	37.600	
	2452	36.75	37.96	37.654	37.594	
	2462	37.99	38.05	37.640	37.594	

Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE (1Mbps)	2402	0.6911	1.0130	>500kHz
	2440	0.6879	1.0141	
	2480	0.6856	1.0128	
BLE (2Mbps)	2402	1.116	2.0253	
	2440	1.140	2.0219	
	2480	1.118	2.0166	
BLE (PHY Coded S2)	2402	0.6569	1.0032	
	2440	0.6559	1.0047	
	2480	0.6564	1.0001	
BLE (PHY Coded S8)	2402	0.6394	1.0348	
	2440	0.6411	1.0366	
	2480	0.6405	1.0360	


Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots

● DTS (6dB) Bandwidth

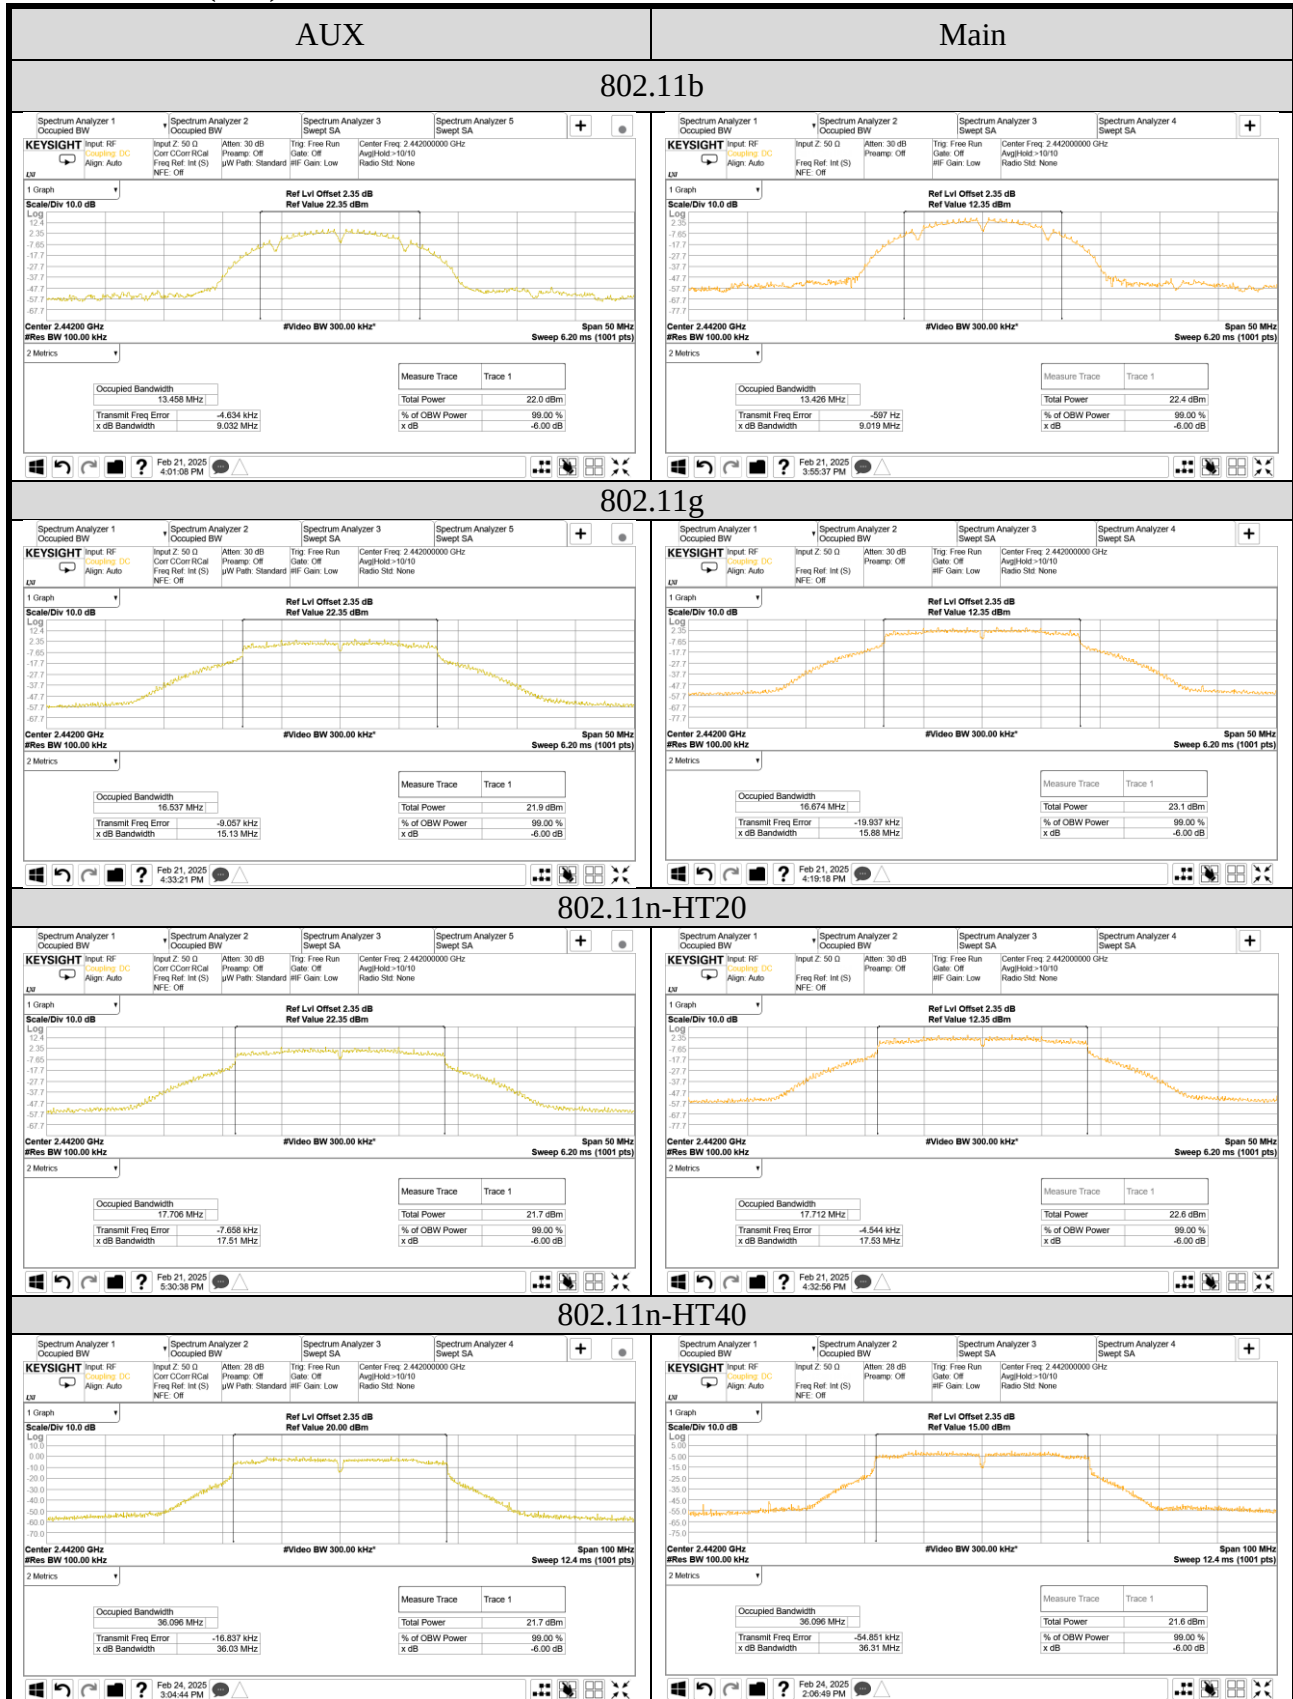

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

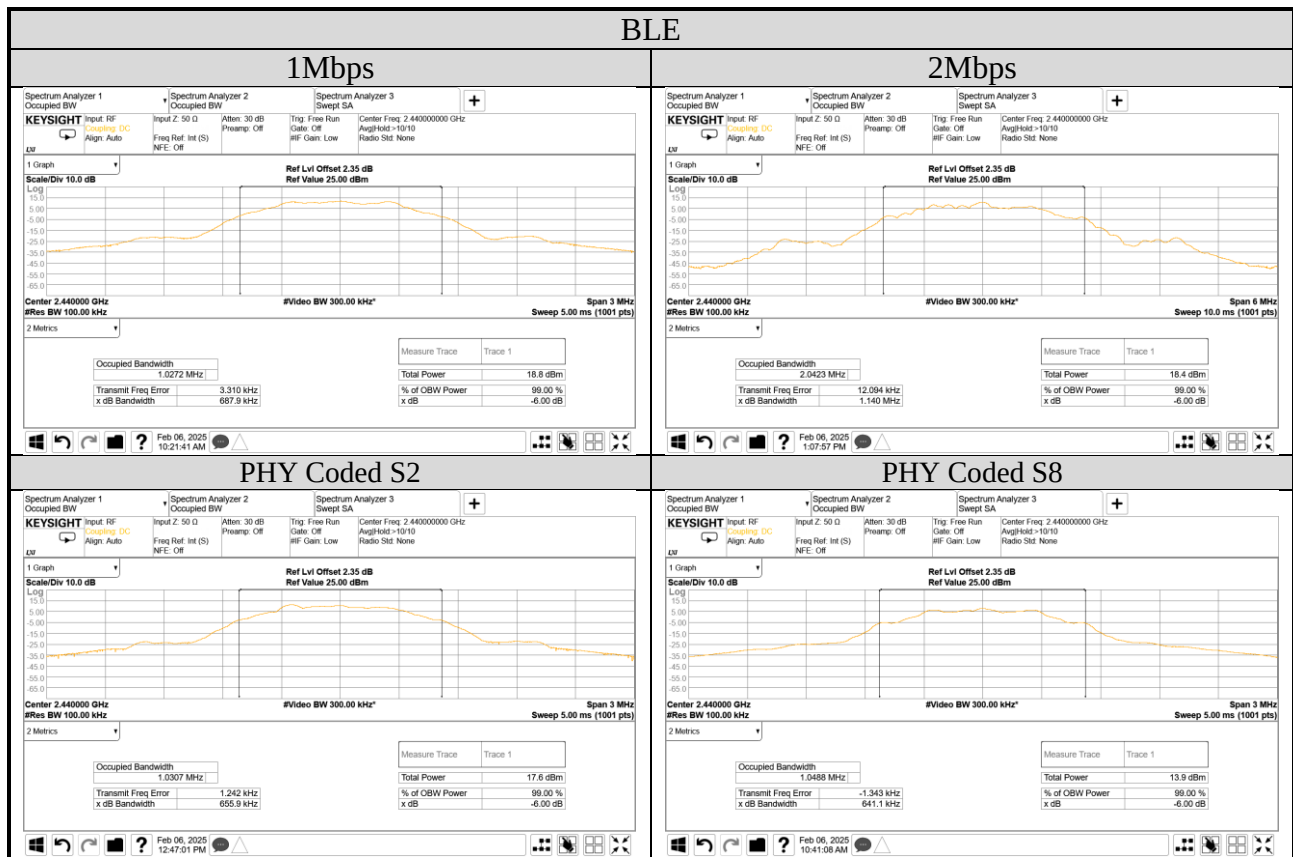

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● Occupied (99%) Bandwidth

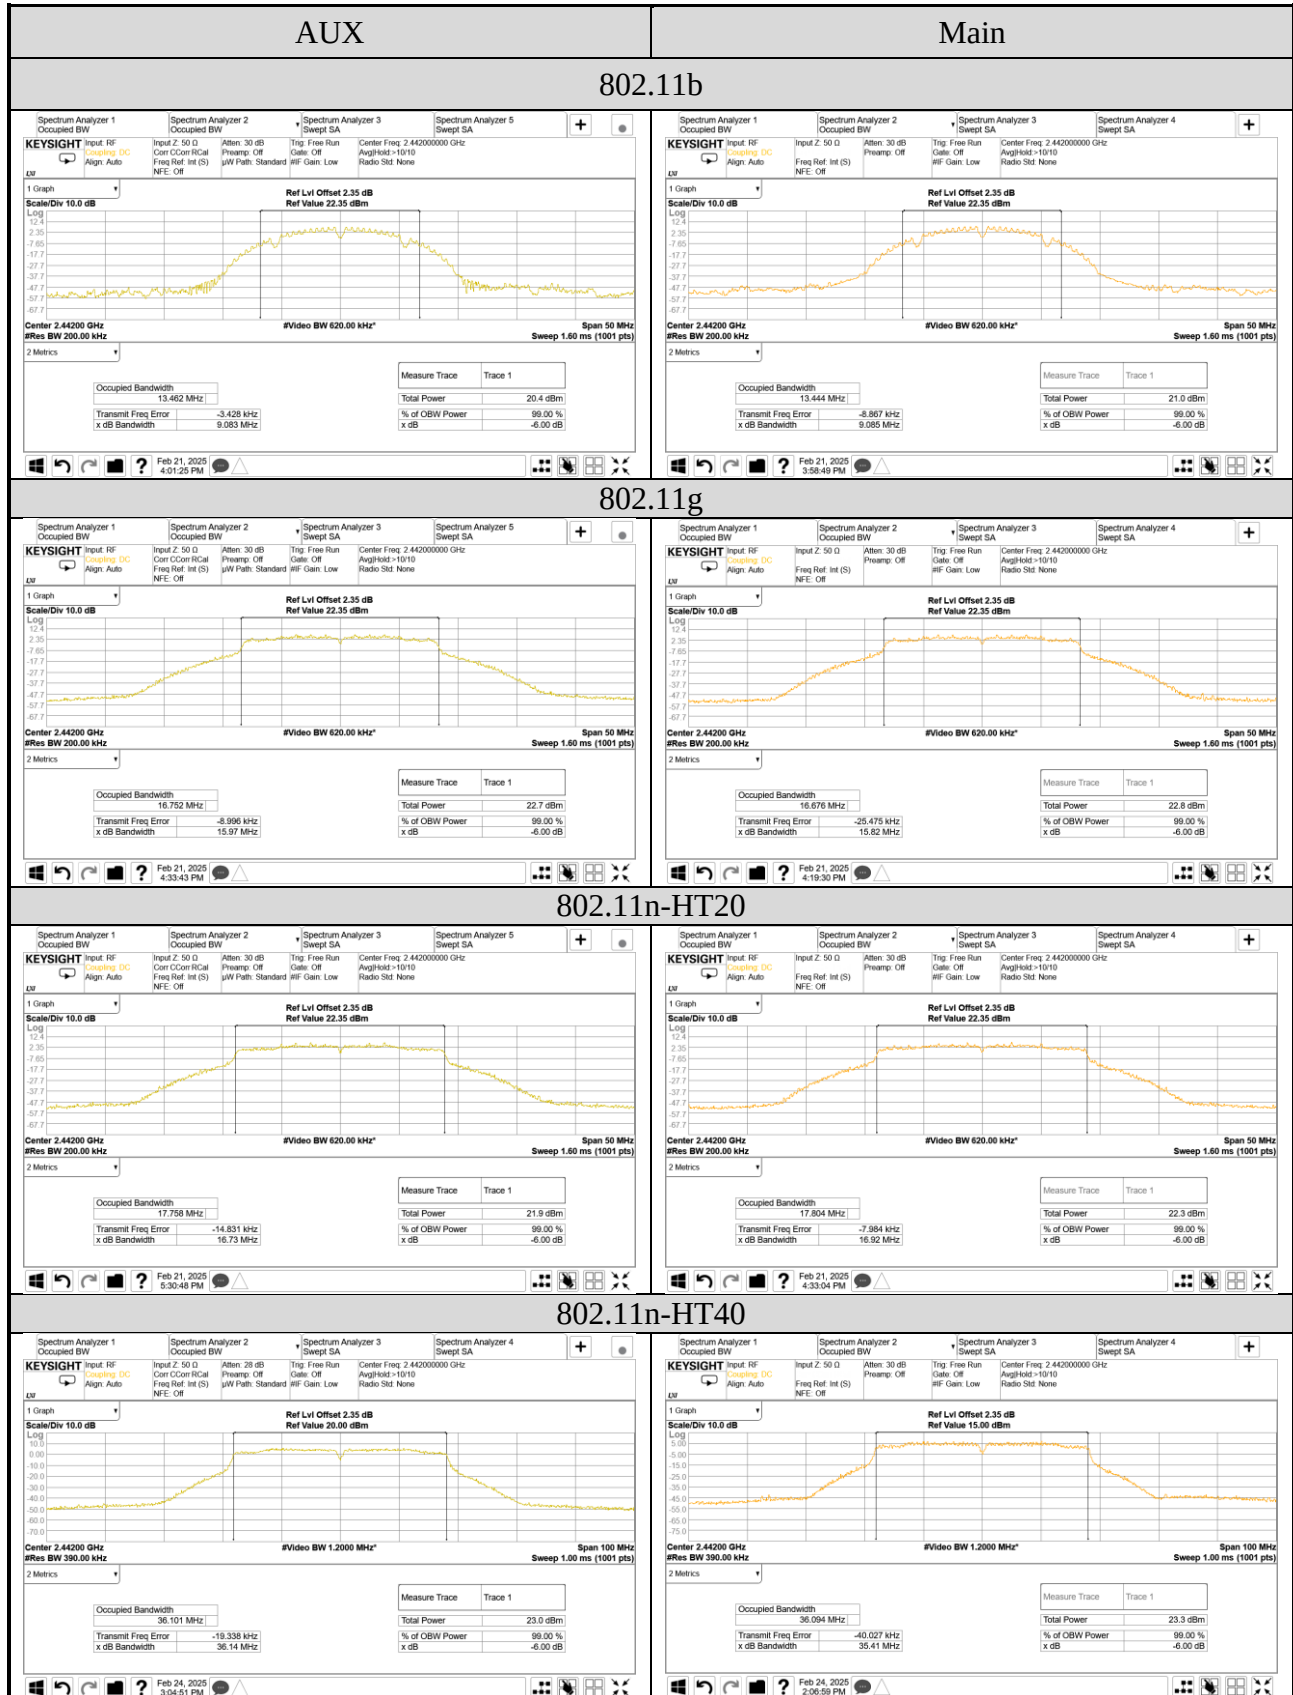


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


802.11ax-HE20

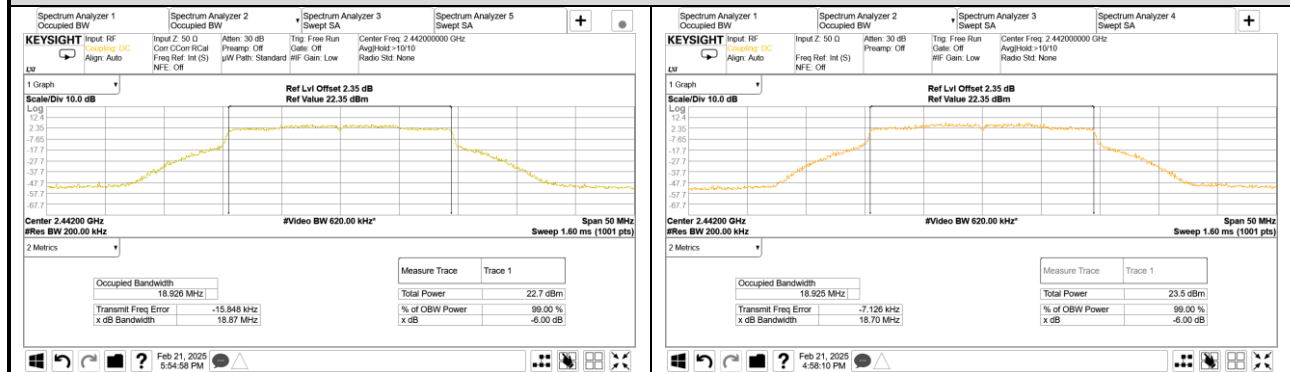


802.11ax-HE40

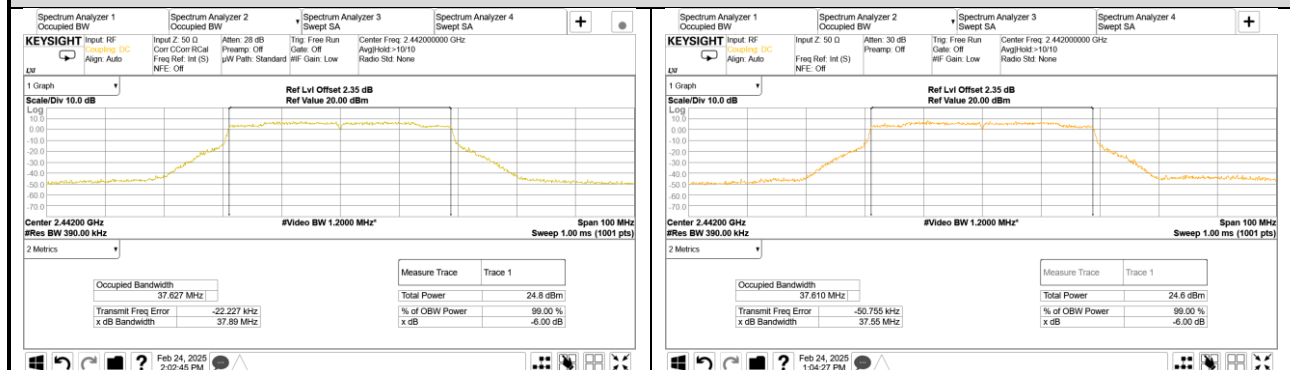

802.11be-EHT20

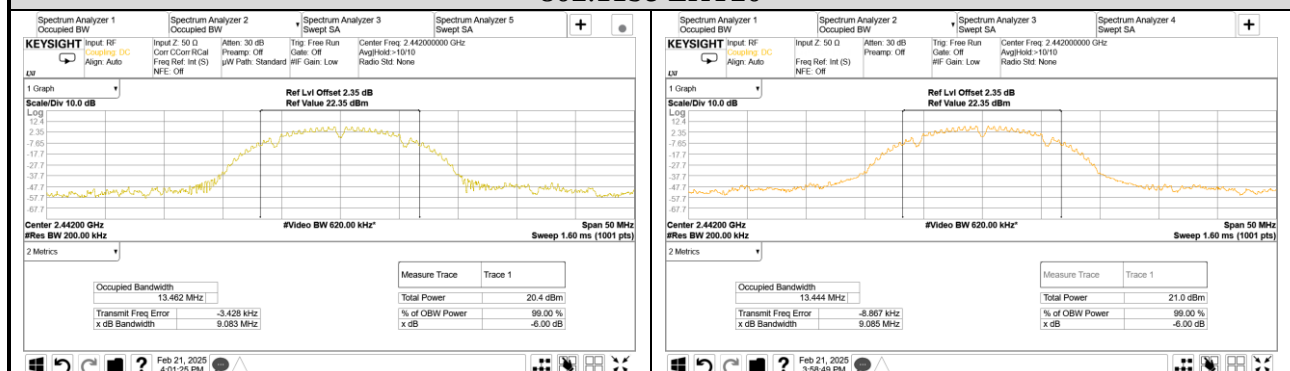

802.11be-EHT40

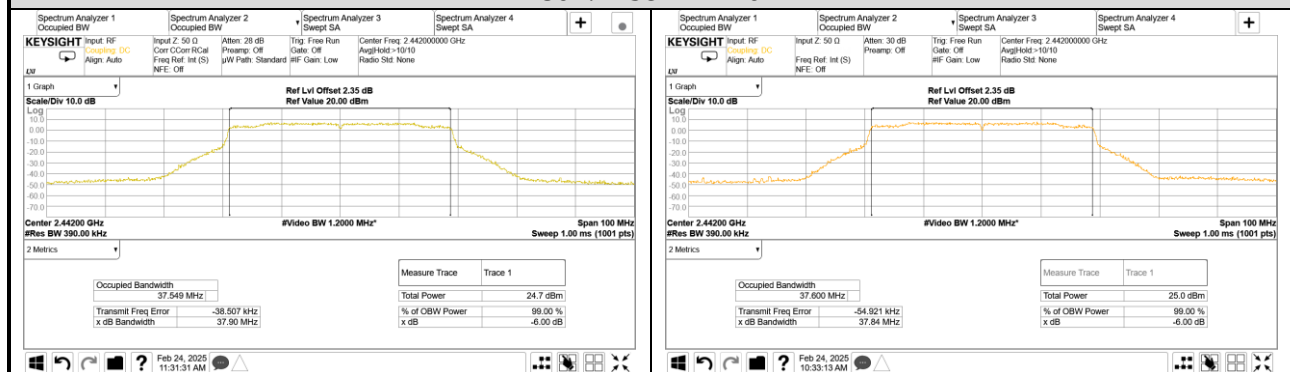

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

