

A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH

Test Date	2025/02/10~ 20	Temp./Hum.	19 ~ 22°C/54 ~ 62%
Cable Loss	3.89dB	Tested By	Sean Wang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Average Output Power and Emission/Occupied Bandwidth

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	23.26	21.60	16.86	16.46	14.38	14.43	N/A	14.43	24	N/A
	5200	23.52	22.55	16.84	16.47	14.09	14.30		14.30		
	5240	24.45	21.50	17.06	16.48	14.37	14.51		14.51		
U-NII Band 2A	5260	24.40	21.74	16.90	16.44	14.22	14.46		14.46		24.37
	5300	23.27	22.37	16.82	16.46	14.64	14.56		14.64		24.50
	5320	23.37	22.40	16.76	16.48	14.60	14.42		14.60		24.50
U-NII Band 2C	5500	22.79	22.07	16.69	16.48	13.85	14.15		14.15		24.44
	5580	24.03	22.20	16.81	16.46	14.10	13.12		14.10		24.46
	5700	23.27	21.88	16.79	16.50	14.95	13.94		14.95		24.40
	5720	24.64	22.10	16.94	16.50	14.85	13.95		14.85		24.44
Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	16.38	16.42	16.46	16.46	14.95	14.49	N/A	14.95	30	N/A
	5785	16.44	16.40	16.42	16.42	14.98	14.58		14.98		
	5825	16.45	16.43	16.44	16.46	14.93	14.72		14.93		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Antenna Gain (dBi)		Max Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB)		Occupied (99%) Bandwidth					AUX	Main		
		AUX	Main	AUX	Main	AUX	Main		AUX	Main		
U-NII Band 4	5845	16.38	16.41	16.44	16.46	13.75	14.25	N/A	2.50	2.30	16.55	30
	5865	16.45	16.44	16.41	16.46	13.85	14.21		2.50	2.30	16.51	
	5885	16.49	16.39	16.40	16.47	13.82	14.18		2.50	2.30	16.48	

Note: 1. The results have been included cable loss.

2. Max Average Output Power (EIRP) = Max of average output power (AUX or Main) (dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	23.65	22.56	16.81	17.67	14.39	14.05	N/A	17.23	24	N/A
	5200	23.19	22.13	16.76	17.67	14.27	14.14		17.22		
	5240	23.57	22.25	16.75	17.63	14.26	14.24		17.26		
U-NII Band 2A	5260	21.93	22.14	16.55	17.67	14.39	14.26		17.34		24.41
	5300	23.02	22.46	16.67	17.69	14.34	14.12		17.24		24.51
	5320	23.76	22.39	16.68	17.67	14.16	14.01		17.10		24.50
U-NII Band 2C	5500	22.21	22.37	16.61	17.69	14.12	13.80		16.97		24.47
	5580	23.05	21.98	16.69	17.68	14.13	14.09		17.12		24.42
	5700	24.07	21.97	16.82	17.65	14.23	14.32		17.29		24.42
	5720	22.21	22.19	16.63	17.64	14.11	14.27		17.20		24.46
Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	16.45	17.68	16.45	17.68	14.20	14.35	N/A	17.29	30	N/A
	5785	16.45	17.70	16.44	17.67	14.18	14.36		17.28		
	5825	16.42	17.67	16.46	17.66	13.91	14.18		17.06		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	16.41	17.64	16.45	17.66	13.52	14.18	N/A	2.51	19.38	30
	5865	16.42	17.69	16.46	17.66	13.75	14.16		2.51	19.48	
	5885	16.40	17.65	16.46	17.64	13.77	14.14		2.51	19.48	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+
Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	41.20	41.23	36.08	36.07	14.19	14.10	N/A	17.16	24	N/A
	5230	40.84	40.82	36.02	36.02	14.22	14.17		17.21		
U-NII Band 2A	5270	40.57	41.26	36.10	36.06	14.29	14.11		17.21		27.08
	5310	41.72	40.95	36.01	36.05	14.15	13.94		17.06		27.12
U-NII Band 2C	5510	40.59	40.41	35.97	36.04	14.13	13.81		16.98		27.06
	5550	40.97	40.59	36.06	36.02	14.17	14.03		17.11		27.08
	5670	41.26	41.06	36.00	36.01	14.43	14.30		17.38		27.13
	5710	40.48	42.02	36.02	36.00	14.07	14.23		17.16		27.07
Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	36.42	36.41	36.00	36.05	14.25	14.36	N/A	17.32	30	N/A
	5795	36.46	36.39	36.10	36.04	14.02	14.35		17.20		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Antenna: INPAQ

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5835	36.42	36.30	36.03	36.04	13.78	14.17	N/A	2.51	19.50	30
	5875	36.39	36.34	36.06	36.01	13.77	14.14		2.51	19.48	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ac- VHT20	Centre Frequency (MHz)	Bandwidth(MHz) ^{Note 4}				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth						
		Aux	Main	Aux	Main	Aux	Main			
U-NII Band 1	5180	N/A	N/A	N/A	N/A	14.33	14.03	N/A	17.19	24
	5200	N/A	N/A	N/A	N/A	14.24	14.11		17.19	
	5240	N/A	N/A	N/A	N/A	14.25	14.22		17.25	
U-NII Band 2A	5260	N/A	N/A	N/A	N/A	14.36	14.21		17.30	
	5300	N/A	N/A	N/A	N/A	14.29	14.12		17.22	
	5320	N/A	N/A	N/A	N/A	14.19	13.98		17.10	
U-NII Band 2C	5500	N/A	N/A	N/A	N/A	14.11	13.73		16.93	
	5580	N/A	N/A	N/A	N/A	14.12	14.05		17.10	
	5700	N/A	N/A	N/A	N/A	14.23	14.25		17.25	
	5720	N/A	N/A	N/A	N/A	14.06	14.23		17.16	
Mode 802.11ac- VHT20	Centre Frequency (MHz)	Bandwidth(MHz) ^{Note 4}				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth						
		Aux	Main	Aux	Main	Aux	Main			
U-NII Band 3	5745	N/A	N/A	N/A	N/A	14.21	14.31	N/A	17.27	30
	5785	N/A	N/A	N/A	N/A	14.20	14.32		17.27	
	5825	N/A	N/A	N/A	N/A	13.94	14.18		17.07	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. The 802.11ac mode for VHT20/VHT40 are not the worst case, thus it is unnecessary to test.

5. We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11ac- VHT20	Centre Frequency (MHz)	Bandwidth(MHz) ^{Note 4}				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	N/A	N/A	N/A	N/A	13.84	14.15	N/A	2.51	19.52	30
	5865	N/A	N/A	N/A	N/A	13.83	14.12		2.51	19.50	
	5885	N/A	N/A	N/A	N/A	13.82	14.11		2.51	19.49	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. The 802.11ac mode for VHT20/VHT40 are not the worst case, thus it is unnecessary to test.

5. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ac- VHT40	Centre Frequency (MHz)	Bandwidth(MHz) ^{Note 4}				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth					
		Aux	Main	Aux	Main	Aux	Main		
U-NII Band 1	5190	N/A	N/A	N/A	N/A	14.17	14.10	N/A	17.15
	5230	N/A	N/A	N/A	N/A	14.20	14.13		17.18
U-NII Band 2A	5270	N/A	N/A	N/A	N/A	14.26	14.05		17.17
	5310	N/A	N/A	N/A	N/A	14.10	13.96		17.04
U-NII Band 2C	5510	N/A	N/A	N/A	N/A	14.13	13.77		16.96
	5550	N/A	N/A	N/A	N/A	14.12	14.04		17.09
	5670	N/A	N/A	N/A	N/A	14.36	14.28		17.33
	5710	N/A	N/A	N/A	N/A	14.09	14.19		17.15
Mode 802.11ac- VHT40	Centre Frequency (MHz)	Bandwidth(MHz) ^{Note 4}				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth					
		Aux	Main	Aux	Main	Aux	Main		
U-NII Band 3	5755	N/A	N/A	N/A	N/A	14.24	14.35	N/A	17.31
	5795	N/A	N/A	N/A	N/A	14.05	14.28		17.18

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. The 802.11ac mode for VHT20/VHT40 are not the worst case, thus it is unnecessary to test.

5. We only presented the middle channel plots for each test mode.

Mode 802.11ac- VHT40	Centre Frequency (MHz)	Bandwidth(MHz) ^{Note 4}				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5835	N/A	N/A	N/A	N/A	13.84	14.16	N/A	2.51	19.52	30
	5875	N/A	N/A	N/A	N/A	13.82	14.14		2.51	19.50	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. The 802.11ac mode for VHT20/VHT40 are not the worst case, thus it is unnecessary to test.

5. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	82.23	81.51	75.20	75.22	10.90	11.47	N/A	14.20	24	N/A
U-NII Band 2A	5290	82.04	80.58	75.22	75.29	11.21	10.07		13.69		30.06
U-NII Band 2C	5530	82.17	81.68	75.16	75.20	11.17	10.28		13.76		30.12
	5610	81.07	81.51	75.23	75.28	11.42	10.47		13.98		30.09
	5690	81.04	81.72	75.36	75.25	11.67	10.81		14.27		30.09
Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	76.17	76.34	75.22	75.24	11.11	10.80	N/A	13.97	30	N/A

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5855	76.39	75.97	75.26	75.28	10.72	10.13	N/A	2.51	15.96	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ac- VHT160	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	161.00	160.70	153.88	153.65	11.09	11.08	N/A	14.10	24	33.06
U-NII Band 2C	5570	161.20	160.80	153.75	153.64	11.56	10.13		13.91		33.06

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5815	156.40	156.30	153.92	153.74	11.41	10.27	N/A	2.51	16.40	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	24.22	23.06	18.90	18.92	14.31	14.01	N/A	17.17	24	N/A
	5200	23.63	23.40	18.90	18.93	14.17	14.07		17.13		
	5240	23.69	22.00	18.96	18.91	14.16	14.12		17.15		
U-NII Band 2A	5260	22.22	23.11	18.93	19.00	14.29	14.12		17.22		24.47
	5300	23.97	23.25	18.95	18.94	14.25	14.03		17.15		24.66
	5320	23.45	23.43	18.91	18.99	14.11	13.91		17.02		24.70
U-NII Band 2C	5500	22.02	22.22	18.86	18.93	14.03	13.71		16.88		24.43
	5580	23.11	22.40	18.89	18.96	14.04	13.97		17.02		24.50
	5700	23.21	23.05	18.95	18.95	14.13	14.18		17.17		24.63
	5720	22.92	23.24	18.92	18.91	14.03	14.18		17.12		24.60
Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	18.88	19.05	18.88	18.90	14.12	14.26	N/A	17.20	30	N/A
	5785	18.89	18.97	18.89	18.87	14.08	14.26		17.18		
	5825	18.86	19.03	18.89	18.87	13.85	14.08		16.98		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	18.99	19.06	18.87	18.87	13.75	14.03	N/A	2.51	19.41	30
	5865	18.97	19.06	18.86	18.89	13.74	14.03		2.51	19.41	
	5885	19.03	18.98	18.92	18.87	13.74	14.01		2.51	19.40	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	40.64	40.97	37.56	37.53	14.11	14.00	N/A	17.07	24	N/A
	5230	40.33	41.74	37.48	37.54	14.15	14.13		17.15		
U-NII Band 2A	5270	41.10	41.09	37.37	37.48	14.25	14.05		17.16		27.14
	5310	40.79	41.03	37.44	37.58	14.08	13.88		16.99		27.11
U-NII Band 2C	5510	40.46	40.50	37.51	37.43	14.03	13.75		16.90		27.07
	5550	40.43	41.60	37.47	37.57	14.07	13.93		17.01		27.07
	5670	41.72	41.37	37.52	37.46	14.37	14.19		17.29		27.17
	5710	41.20	40.92	37.30	37.48	13.97	14.16		17.08		27.12
Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	38.06	38.09	37.46	37.53	14.12	14.24	N/A	17.19	30	N/A
	5795	37.92	38.08	37.44	37.54	13.93	14.24		17.10		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5835	38.12	38.06	37.43	37.57	13.73	14.05	N/A	2.51	19.41	30
	5875	37.89	38.06	37.57	37.39	13.70	14.03		2.51	19.39	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	80.86	81.00	76.68	76.59	10.93	10.87	N/A	13.91	24	N/A
U-NII Band 2A	5290	81.64	81.15	76.59	76.68	11.44	10.78		14.13		30.09
U-NII Band 2C	5530	80.75	81.25	76.65	76.64	11.13	10.94		14.05		30.07
	5610	81.03	80.52	76.50	76.60	11.12	11.17		14.16		30.06
	5690	81.17	82.10	76.69	76.76	11.53	11.48		14.52		30.09
Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	77.66	78.00	76.68	76.67	11.32	11.38	N/A	14.36	30	N/A

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5855	77.99	78.01	76.65	76.57	11.07	10.08	N/A	2.51	16.12	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	162.00	162.00	155.15	155.19	10.97	11.35	N/A	14.17	24	33.10
U-NII Band 2C	5570	162.30	162.10	155.05	154.97	11.35	10.33		13.88		33.10

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5815	158.00	157.90	155.19	155.32	11.29	10.44	N/A	2.51	16.41	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	26/0	24.22	23.06	18.90	18.92	9.50	9.53	0.141	12.67	24	N/A
		52/37	24.22	23.06	18.90	18.92	12.70	12.59	0.150	15.81		
		106/53	24.22	23.06	18.90	18.92	14.23	14.10	0.150	17.33		
U-NII Band 2A	5320	26/8	23.45	23.43	18.91	18.99	9.36	9.27	0.141	12.47		24.70
		52/40	23.45	23.43	18.91	18.99	12.40	12.39	0.150	15.56		24.70
		106/54	23.45	23.43	18.91	18.99	14.04	14.01	0.150	17.19		24.70
U-NII Band 2C	5500	26/0	22.02	22.22	18.86	18.93	9.42	9.39	0.141	12.56		24.43
		52/37	22.02	22.22	18.86	18.93	12.53	12.34	0.150	15.60		24.43
		106/53	22.02	22.22	18.86	18.93	13.98	13.80	0.150	17.05		24.43
	5700	26/8	23.21	23.05	18.95	18.95	9.94	9.85	0.141	13.05		24.63
		52/40	23.21	23.05	18.95	18.95	12.86	12.60	0.150	15.89		24.63
		106/54	23.21	23.05	18.95	18.95	14.13	14.37	0.150	17.41		24.63
Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	26/0	18.88	19.05	18.88	18.90	14.08	14.25	0.141	17.32	30	N/A
		52/37	18.88	19.05	18.88	18.90	14.11	14.32	0.150	17.38		
		106/53	18.88	19.05	18.88	18.90	14.10	14.31	0.150	17.37		
	5825	26/8	18.86	19.03	18.89	18.87	13.76	14.17	0.141	17.12		
		52/40	18.86	19.03	18.89	18.87	13.82	14.21	0.150	17.18		
		106/54	18.86	19.03	18.89	18.87	13.81	14.18	0.150	17.16		

Note:

- The results have been included cable loss.
- According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.
- B is the 26 dB emission bandwidth.
- We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	242/61	40.64	40.97	37.56	37.53	14.08	14.00	0.150	17.20	24	N/A
U-NII Band 2A	5310	242/62	40.79	41.03	37.44	37.58	13.96	13.90		17.09		27.11
U-NII Band 2C	5510	242/61	40.46	40.50	37.51	37.43	13.90	13.70		16.96		27.07
	5670	242/62	41.72	41.37	37.52	37.46	14.15	14.29		17.38		27.17
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	242/61	38.06	38.09	37.46	37.53	13.99	14.19	0.150	17.25	30	N/A
	5795	242/62	37.92	38.08	37.44	37.54	13.81	14.26		17.20		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ₃ ^{Note}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	484/65	80.86	81.00	76.68	76.59	14.07	14.10	0.155	17.25	24	N/A
U-NII Band 2A	5290	484/66	81.64	81.15	76.59	76.68	13.93	13.84		17.05		30.09
U-NII Band 2C	5530	484/65	80.75	81.25	76.65	76.64	13.99	13.81		17.07		30.07
	5610	484/66	81.03	80.52	76.50	76.60	14.02	13.96		17.16		30.06
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ₃ ^{Note}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	484/65	77.66	78.00	76.68	76.67	14.10	14.34	0.155	17.39	30	N/A
		484/66	77.66	78.00	76.68	76.67	13.92	14.35		17.31		

Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ₃ ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	996/97	162.00	162.00	155.15	155.19	10.85	11.46	0.14	14.32	24	33.10
		996/S67	162.00	162.00	155.15	155.19	12.73	12.13		15.59		33.10
U-NII Band 2C	5570	996/97	162.30	162.10	155.05	154.97	10.99	11.90		14.62		33.10
		996/S67	162.30	162.10	155.05	154.97	11.44	12.25		15.02		33.10

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11be- EHT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	22.71	22.74	18.88	18.86	14.27	13.96	N/A	17.13	24	N/A
	5200	22.25	22.47	18.88	18.88	14.17	14.07		17.13		
	5240	23.45	22.14	18.90	18.89	14.15	14.16		17.17		
U-NII Band 2A	5260	22.24	21.92	18.86	18.87	14.29	14.18		17.25		24.41
	5300	22.32	22.61	18.87	18.90	14.27	14.05		17.17		24.49
	5320	22.21	22.49	18.90	18.90	14.06	13.91		17.00		24.47
U-NII Band 2C	5500	22.73	22.23	18.89	18.90	14.01	13.72		16.88		24.47
	5580	21.44	21.53	18.86	18.88	14.01	13.98		17.01		24.31
	5700	22.13	22.18	18.87	18.90	14.12	14.22		17.18		24.45
	5720	22.33	22.58	18.89	18.90	14.00	14.20		17.11		24.49
Mode 802.11be- EHT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	18.93	19.03	18.88	18.91	14.14	14.28	N/A	17.22	30	N/A
	5785	18.91	19.00	18.87	18.89	14.05	14.30		17.19		
	5825	18.61	18.96	18.86	18.86	13.85	14.11		16.99		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11be- EHT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	18.99	19.02	18.86	18.84	13.76	14.04	N/A	2.51	19.42	30
	5865	19.06	19.01	18.85	18.88	13.78	14.03		2.51	19.43	
	5885	18.98	19.00	18.87	18.91	13.77	14.00		2.51	19.41	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11be- EHT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	40.37	40.33	37.46	37.46	14.10	14.00	N/A	17.06	24	N/A
	5230	40.18	41.75	37.54	37.45	14.12	14.13		17.14		
U-NII Band 2A	5270	42.18	41.47	37.41	37.30	14.22	14.04		17.14		27.18
	5310	40.59	41.58	37.43	37.53	14.07	13.86		16.98		27.08
U-NII Band 2C	5510	40.62	40.66	37.39	37.47	14.04	13.71		16.89		27.09
	5550	40.21	40.64	37.39	37.49	14.06	13.92		17.00		27.04
	5670	42.54	40.24	37.52	37.59	14.33	14.21		17.28		27.05
	5710	41.08	41.40	37.48	37.57	14.01	14.16		17.10		27.14
Mode 802.11be- EHT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	38.05	37.98	37.51	37.42	14.11	14.23	N/A	17.18	30	N/A
	5795	38.11	38.09	37.36	37.47	13.92	14.26		17.10		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11be- EHT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5835	38.10	38.02	37.42	37.55	13.75	14.07	N/A	2.51	19.43	30
	5875	38.08	37.97	37.53	37.45	13.71	14.03		2.51	19.39	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11be- EHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	80.96	81.13	76.69	76.75	10.78	10.36	N/A	13.59	24	N/A
U-NII Band 2A	5290	81.34	81.41	76.66	76.69	11.31	10.26		13.83		30.10
U-NII Band 2C	5530	80.83	82.05	76.59	76.58	11.26	10.25		13.79		30.08
	5610	81.61	80.27	76.67	76.58	11.65	10.46		14.11		30.05
	5690	81.47	82.01	76.72	76.72	12.04	10.70		14.43		30.11
Mode 802.11be- EHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	77.95	78.02	76.73	76.70	11.61	10.14	N/A	13.95	30	N/A

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11be- EHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)
		Emission (6dB Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5855	78.00	77.59	76.64	76.76	11.33	10.26	N/A	2.51	16.35	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11be- EHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	162.30	161.80	155.23	155.07	11.02	11.19	N/A	14.12	24	33.09
U-NII Band 2C	5570	162.20	162.20	155.17	155.14	11.14	10.53		13.86		33.10

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11be- EHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5815	157.90	157.90	155.26	155.14	11.03	10.45	N/A	2.51	16.27	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.2/10} + 10^{2.8/10})/2] = 2.51 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11be- EHT20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5180	26/0	22.71	22.74	18.88	18.86	9.78	9.55	0.141	12.82	24	N/A
		52/37	22.71	22.74	18.88	18.86	12.79	12.60	0.141	15.85		
		106/53	22.71	22.74	18.88	18.86	14.11	14.23	0.141	17.32		
U-NII Band 2A	5320	26/8	22.21	22.49	18.90	18.90	9.44	9.31	0.141	12.53		24.47
		52/40	22.21	22.49	18.90	18.90	12.49	12.41	0.141	15.60		24.47
		106/54	22.21	22.49	18.90	18.90	14.04	13.98	0.141	17.16		24.47
U-NII Band 2C	5500	26/0	22.73	22.23	18.89	18.90	9.60	9.41	0.141	12.66		24.47
		52/37	22.73	22.23	18.89	18.90	12.57	12.35	0.141	15.61		24.47
		106/53	22.73	22.23	18.89	18.90	14.02	13.83	0.141	17.08		24.47
	5700	26/8	22.13	22.18	18.87	18.90	10.05	9.84	0.141	13.10		24.45
		52/40	22.13	22.18	18.87	18.90	12.64	12.85	0.141	15.90		24.45
		106/54	22.13	22.18	18.87	18.90	14.12	14.37	0.141	17.40		24.45
Mode 802.11be- EHT20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5745	26/0	18.93	19.03	18.88	18.91	14.08	14.26	0.141	17.32	30	N/A
		52/37	18.93	19.03	18.88	18.91	14.11	14.31	0.141	17.36		
		106/53	18.93	19.03	18.88	18.91	14.31	14.12	0.141	17.37		
	5825	26/8	18.61	18.96	18.86	18.86	13.79	14.19	0.141	17.15		
		52/40	18.61	18.96	18.86	18.86	13.83	14.23	0.141	17.19		
		106/54	18.61	18.96	18.86	18.86	13.82	14.21	0.141	17.17		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11be- EHT40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5190	242/61	40.37	40.33	37.46	37.46	14.11	14.03	0.141	17.22	24	N/A
U-NII Band 2A	5310	242/62	40.59	41.58	37.43	37.53	13.96	13.91		17.09		27.08
U-NII Band 2C	5510	242/61	40.62	40.66	37.39	37.47	13.91	13.71		16.96		27.09
	5670	242/62	42.54	40.24	37.52	37.59	14.13	14.28		17.36		27.05
Mode 802.11be- EHT40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5755	242/61	38.05	37.98	37.51	37.42	14.00	14.22	0.141	17.26	30	N/A
	5795	242/62	38.11	38.09	37.36	37.47	13.82	14.22		17.18		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11be- EHT80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ₃ ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	484/65	80.96	81.13	76.69	76.75	14.02	14.04	0.141	17.18	24	N/A
U-NII Band 2A	5290	484/66	81.34	81.41	76.66	76.69	13.89	13.83		17.01		30.10
U-NII Band 2C	5530	484/65	80.83	82.05	76.59	76.58	13.94	13.79		17.02		30.08
	5610	484/66	81.61	80.27	76.67	76.58	13.96	13.93		17.10		30.05
Mode 802.11be- EHT80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ₃ ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	484/65	77.95	78.02	76.73	76.70	14.06	14.28	0.141	17.32	30	N/A
		484/66	77.95	78.02	76.73	76.70	13.88	14.30		17.25		

Mode 802.11be- EHT160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	996/97	162.30	161.80	155.23	155.07	12.73	12.13	0.141	15.59	24	33.09
		996/S67	162.30	161.80	155.23	155.07	12.29	12.16		15.38		33.09
U-NII Band 2C	5570	996/97	162.20	162.20	155.17	155.14	10.84	11.96		14.59		33.10
		996/S67	162.20	162.20	155.17	155.14	11.21	12.17		14.87		33.10

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.


4. We only presented the middle channel plots for each test mode.


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots


- Maximum Output Power

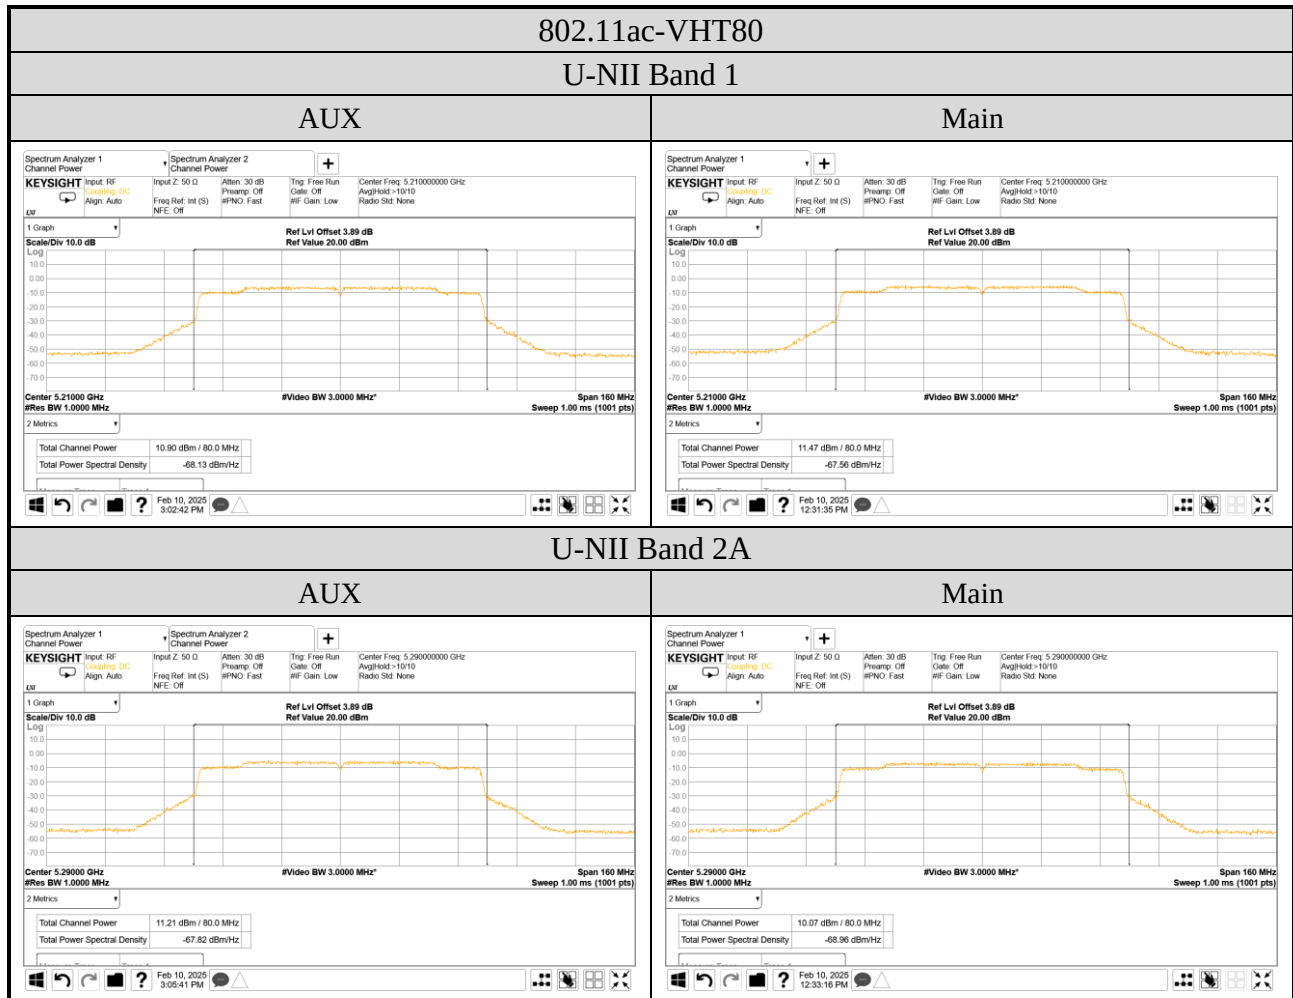

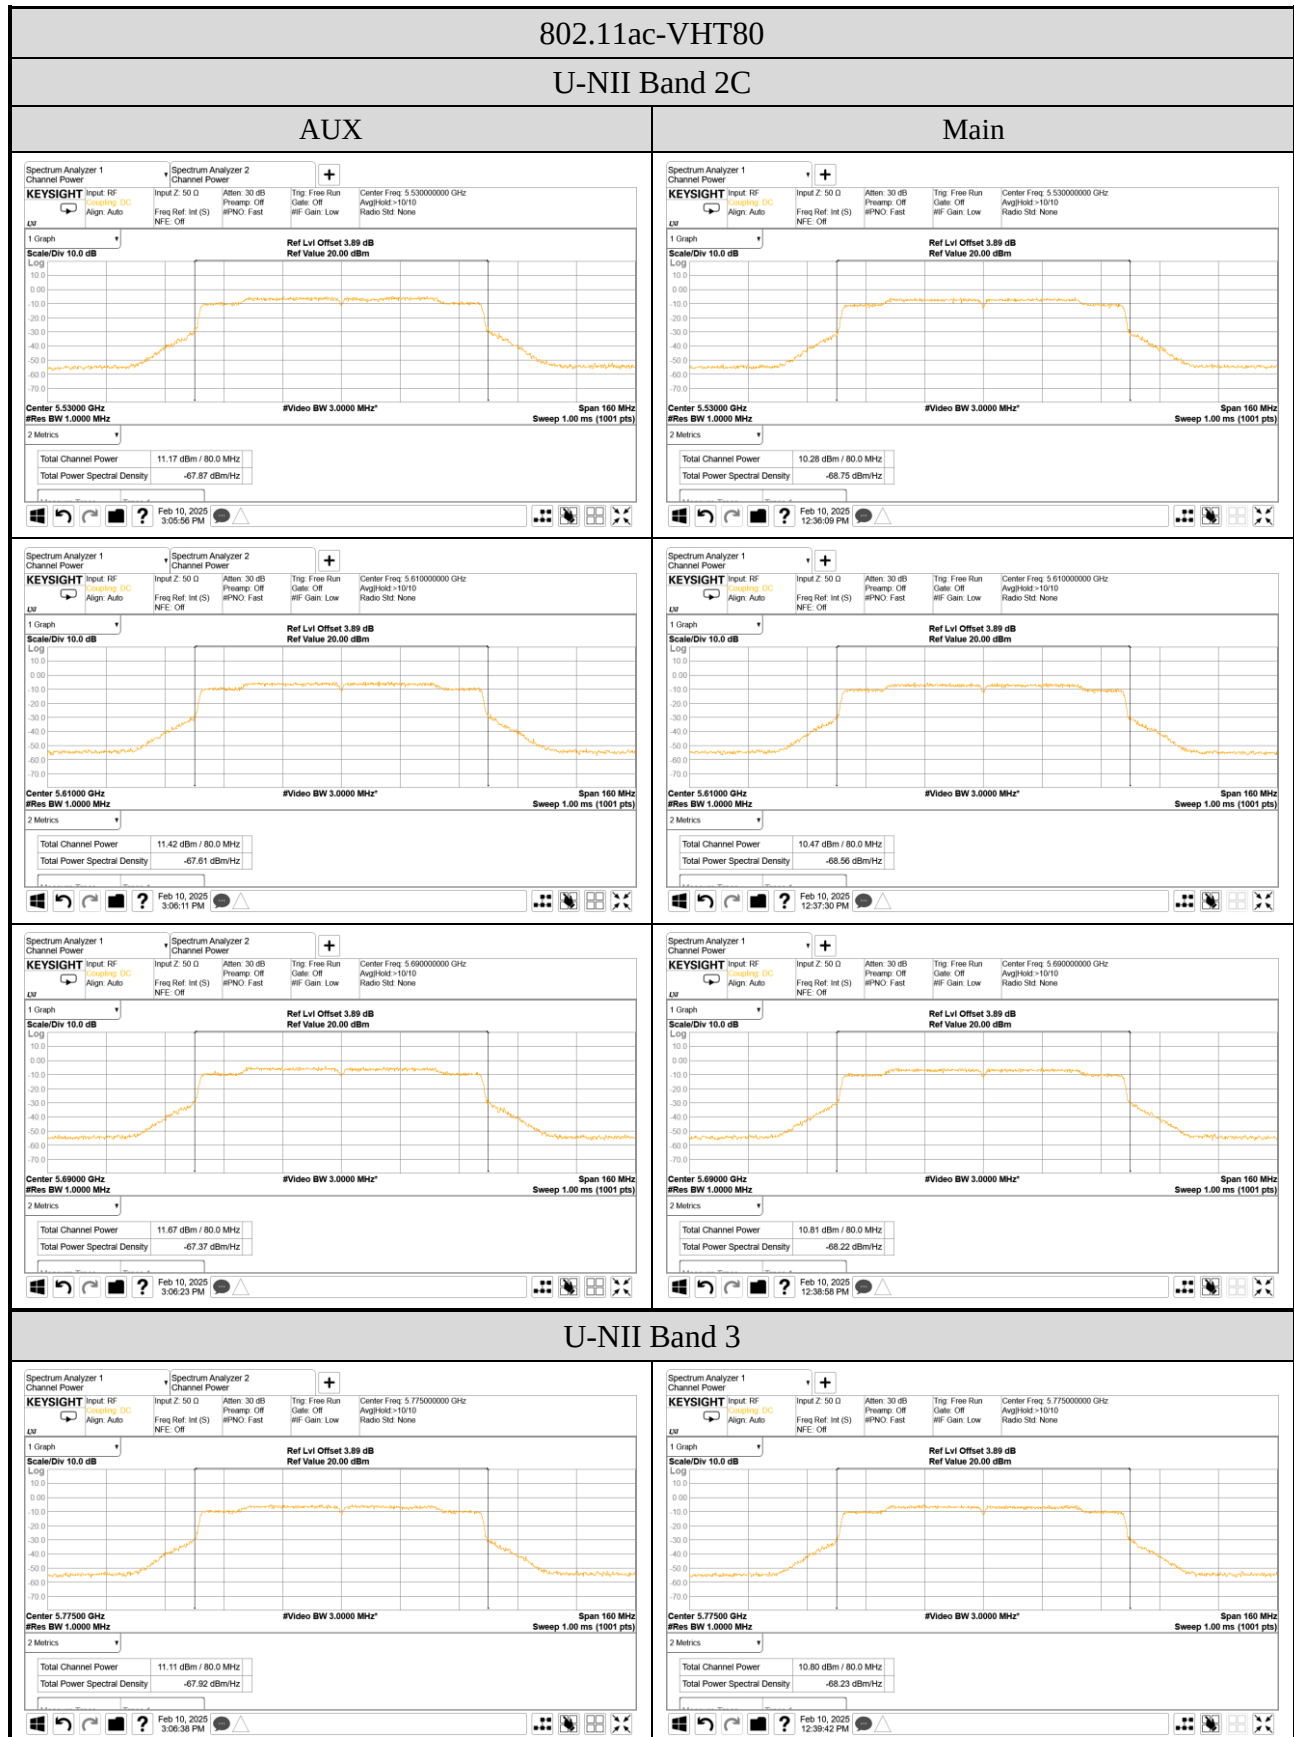


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

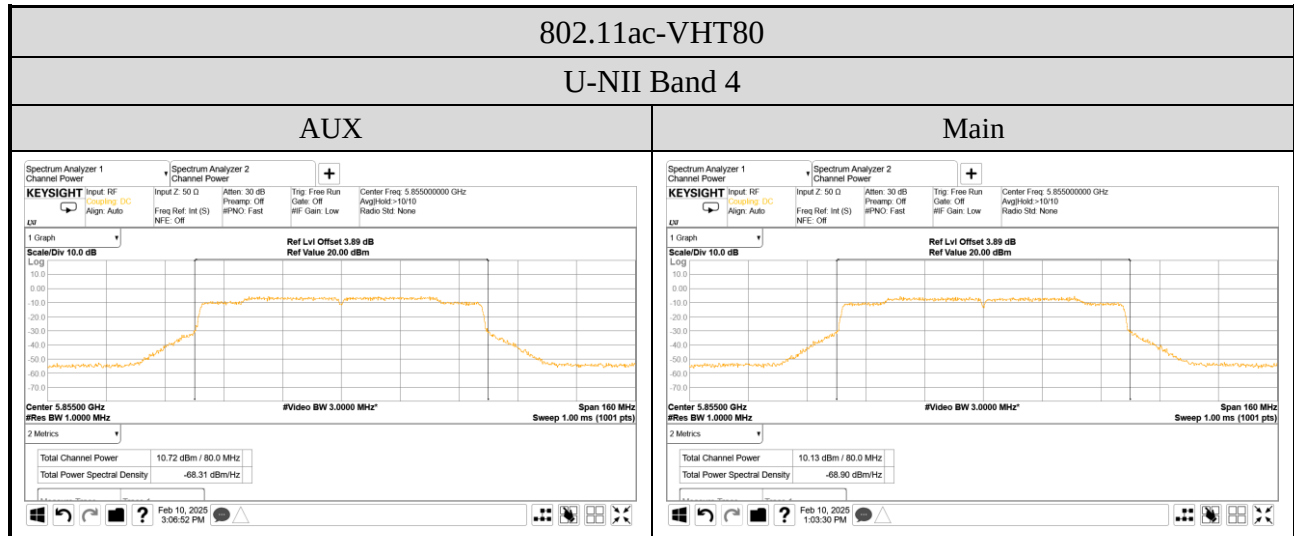


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

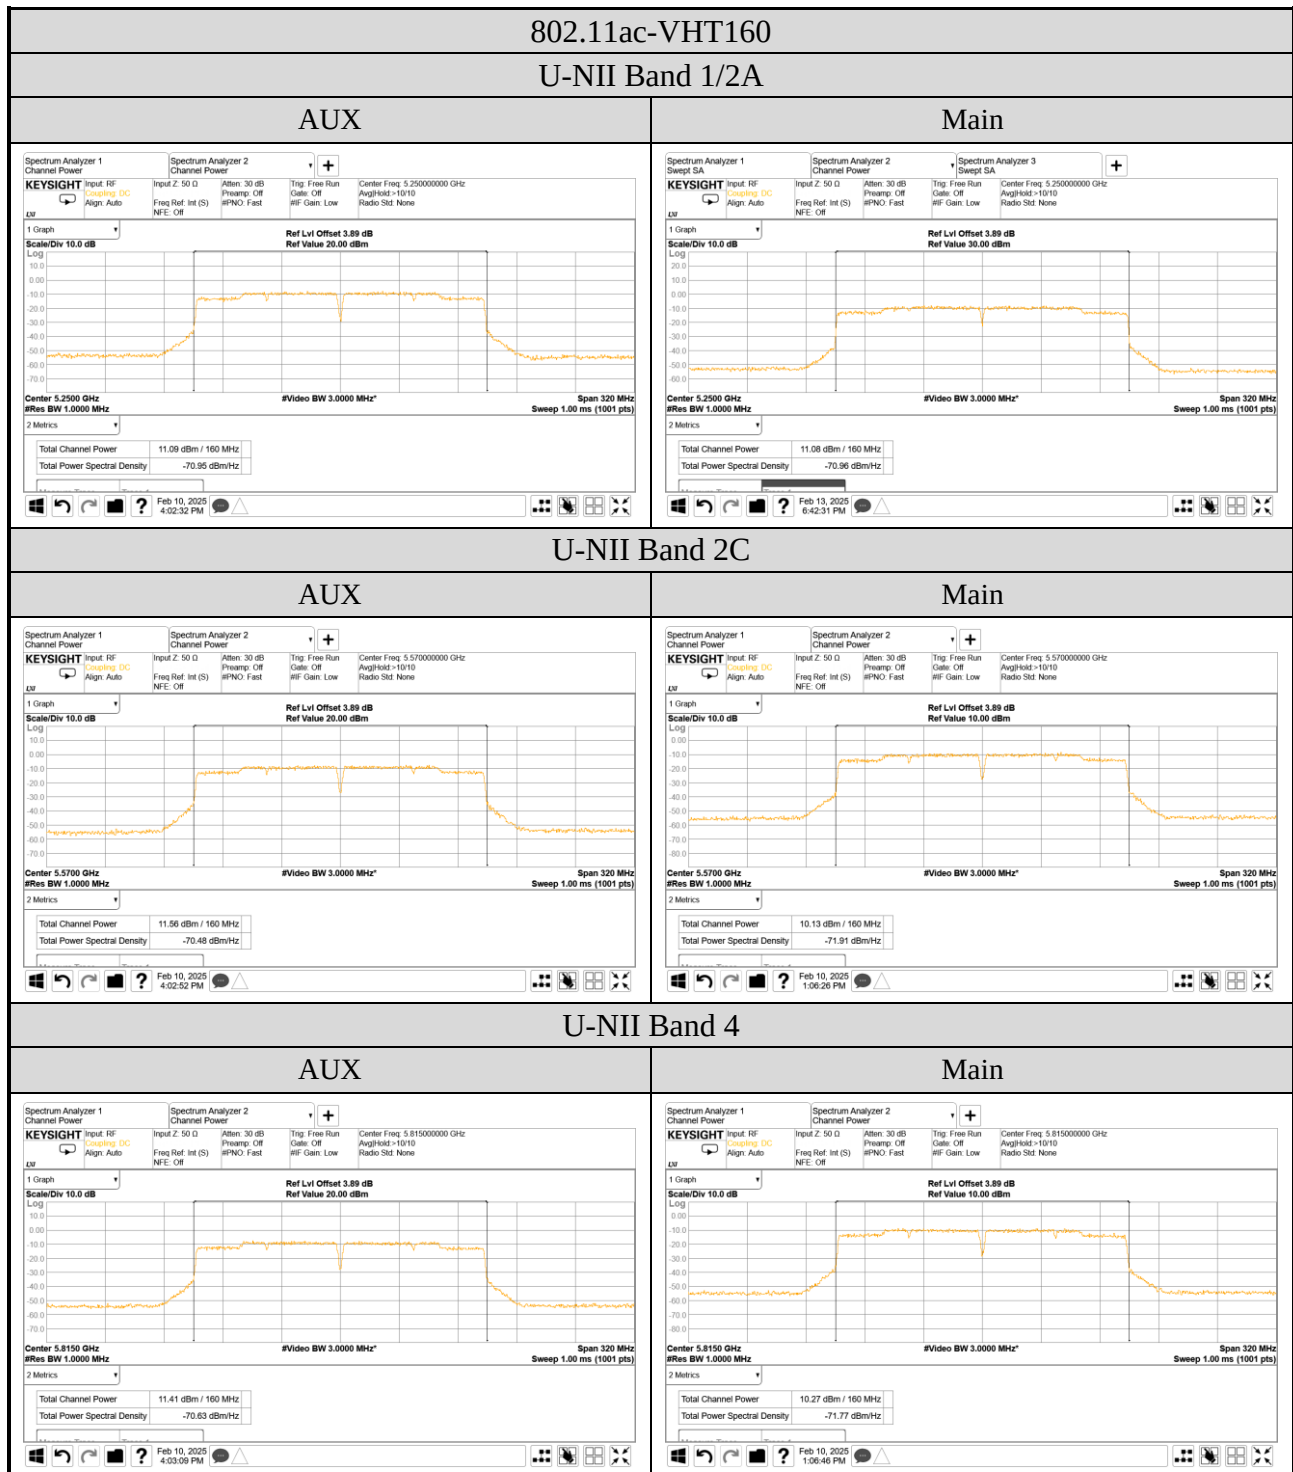


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

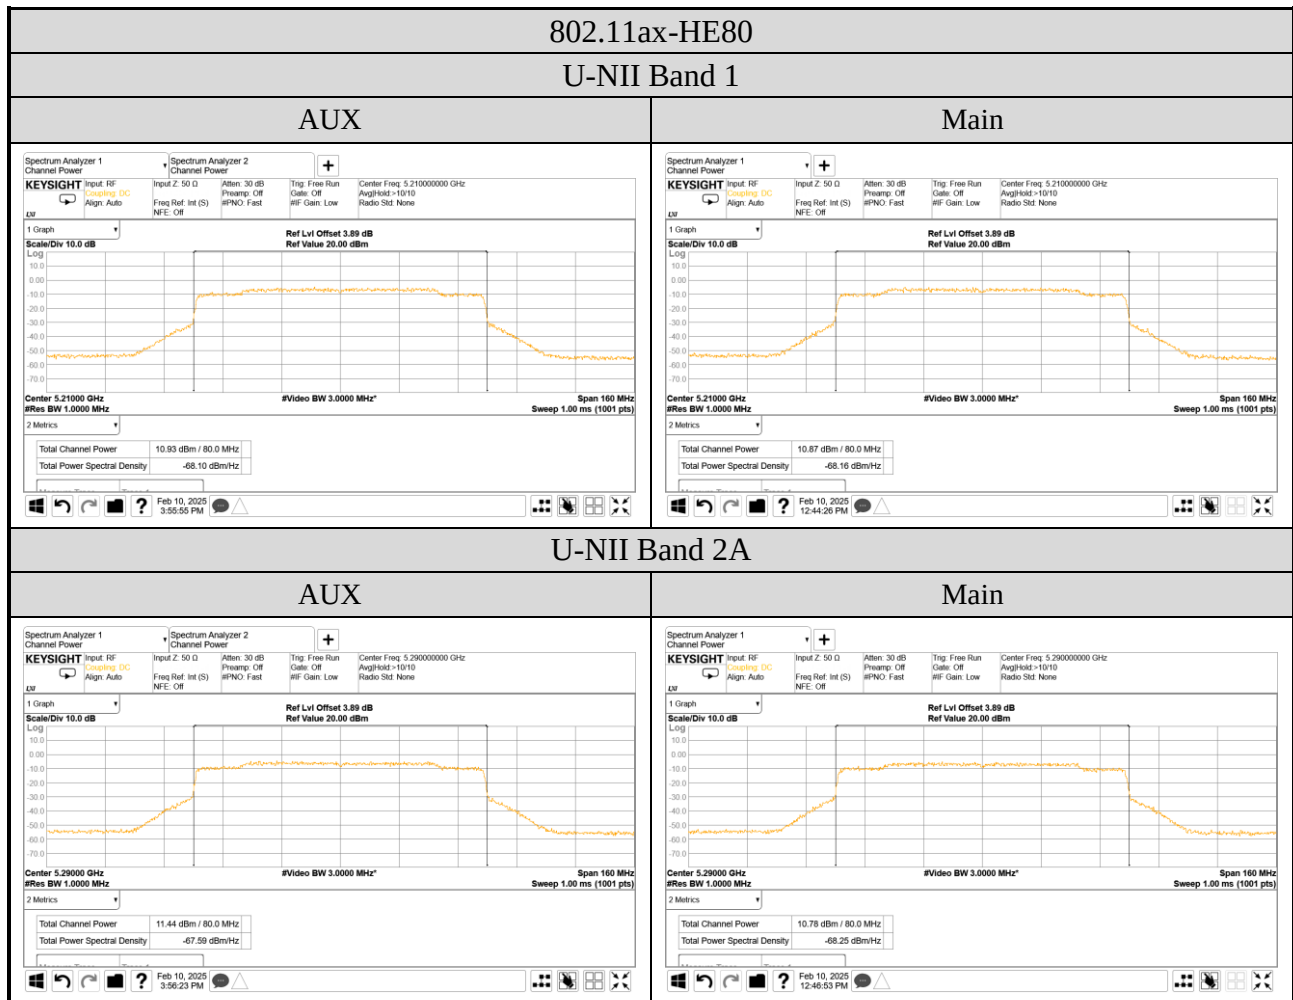


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

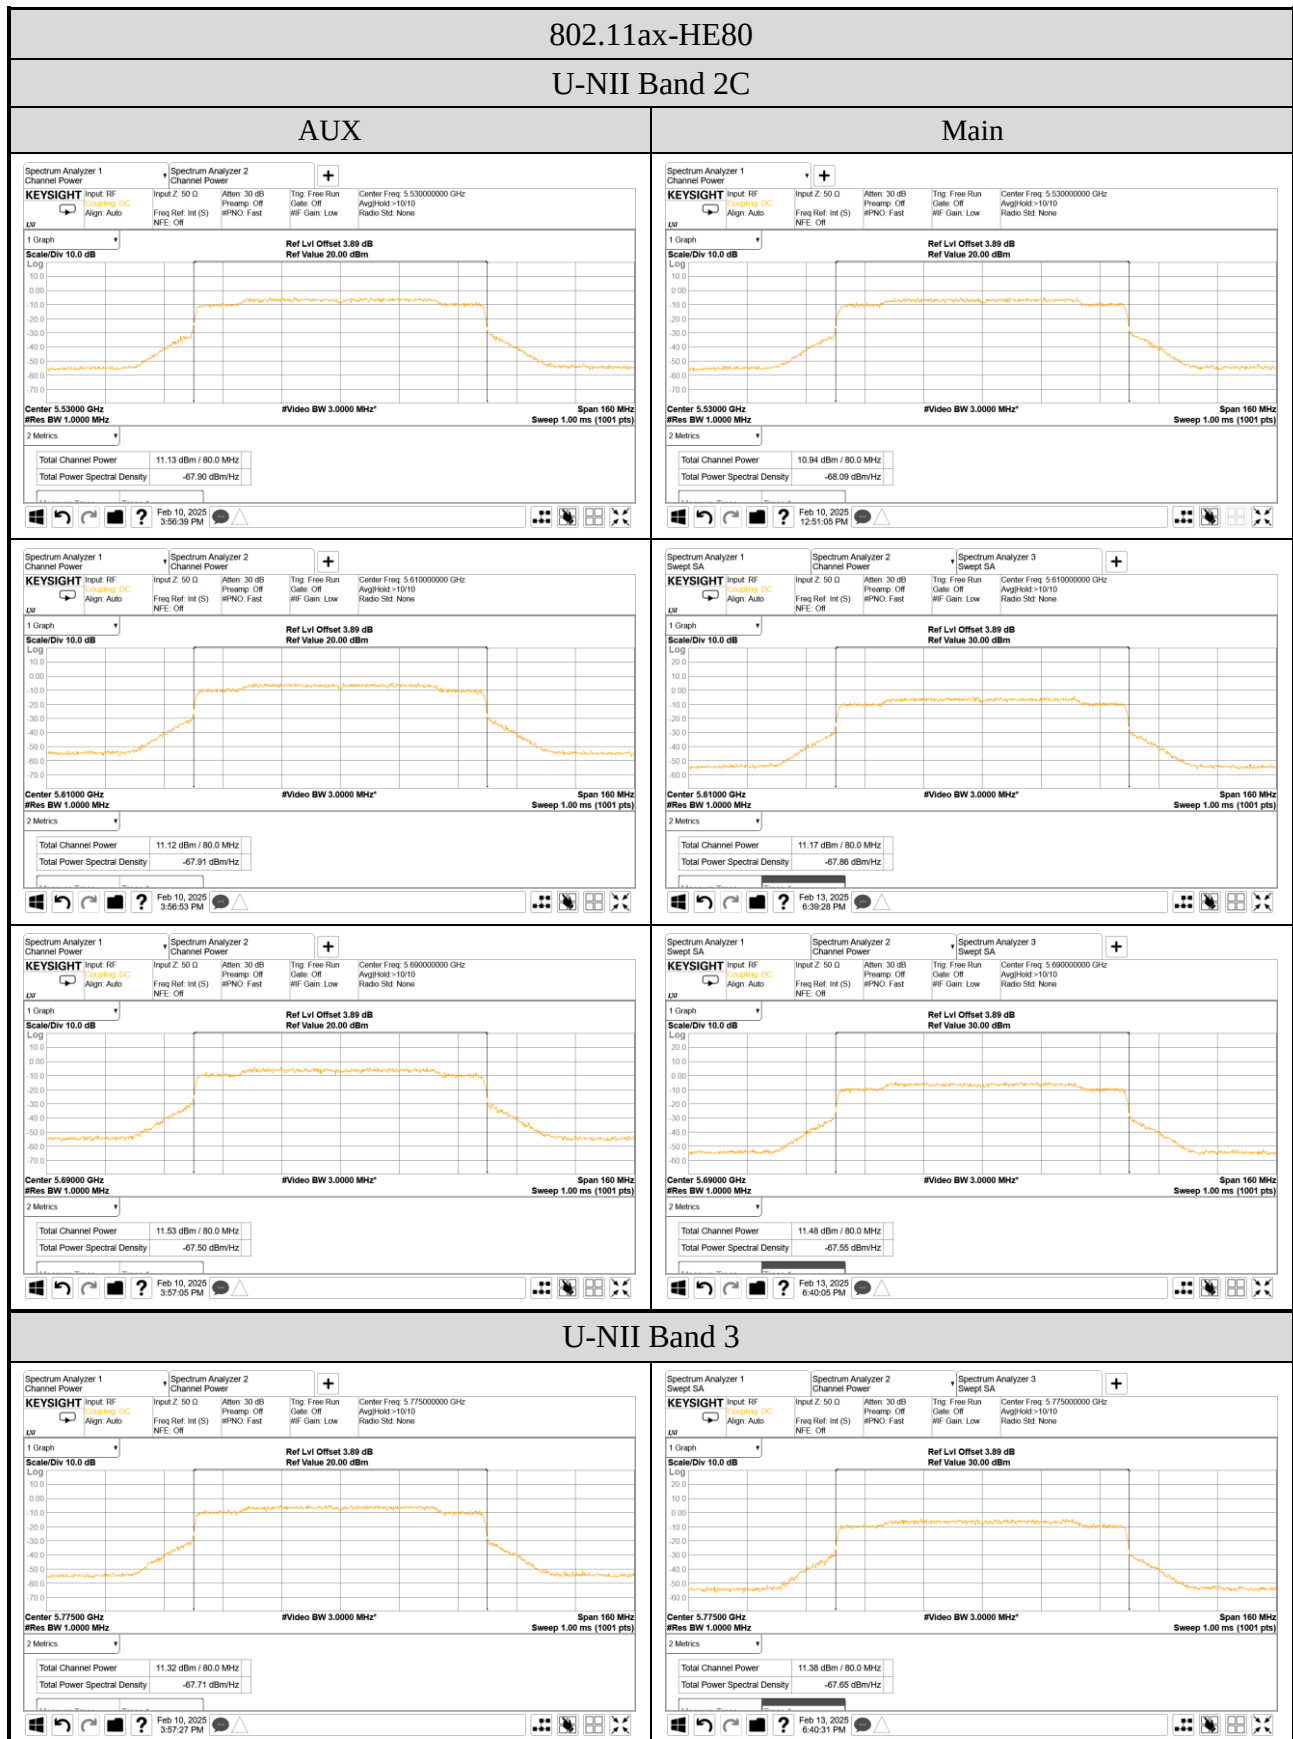


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

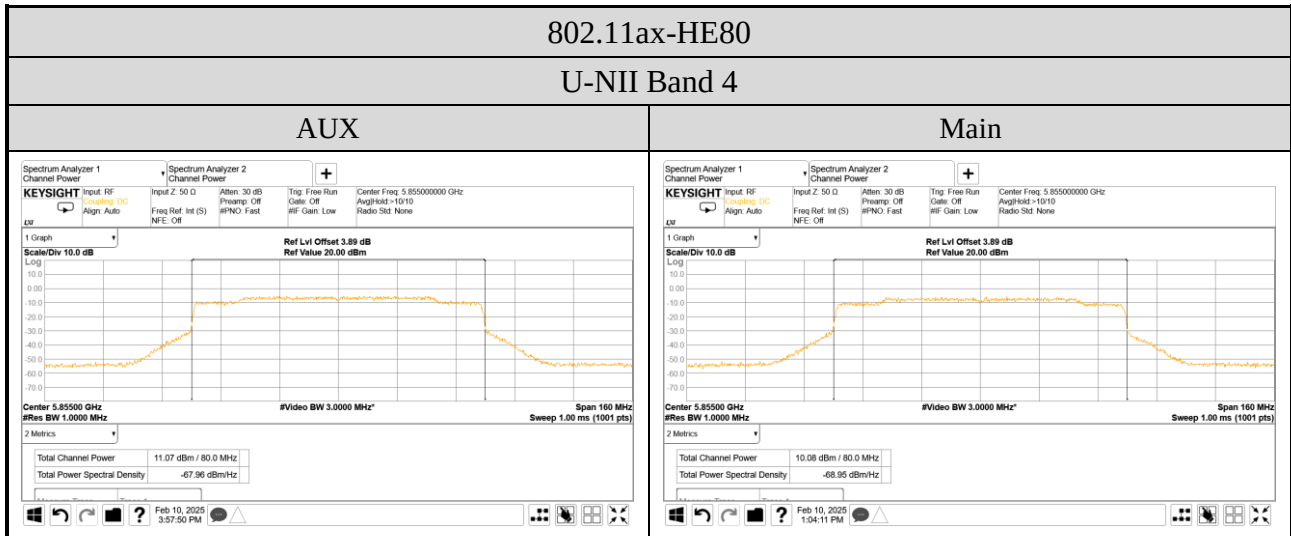


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

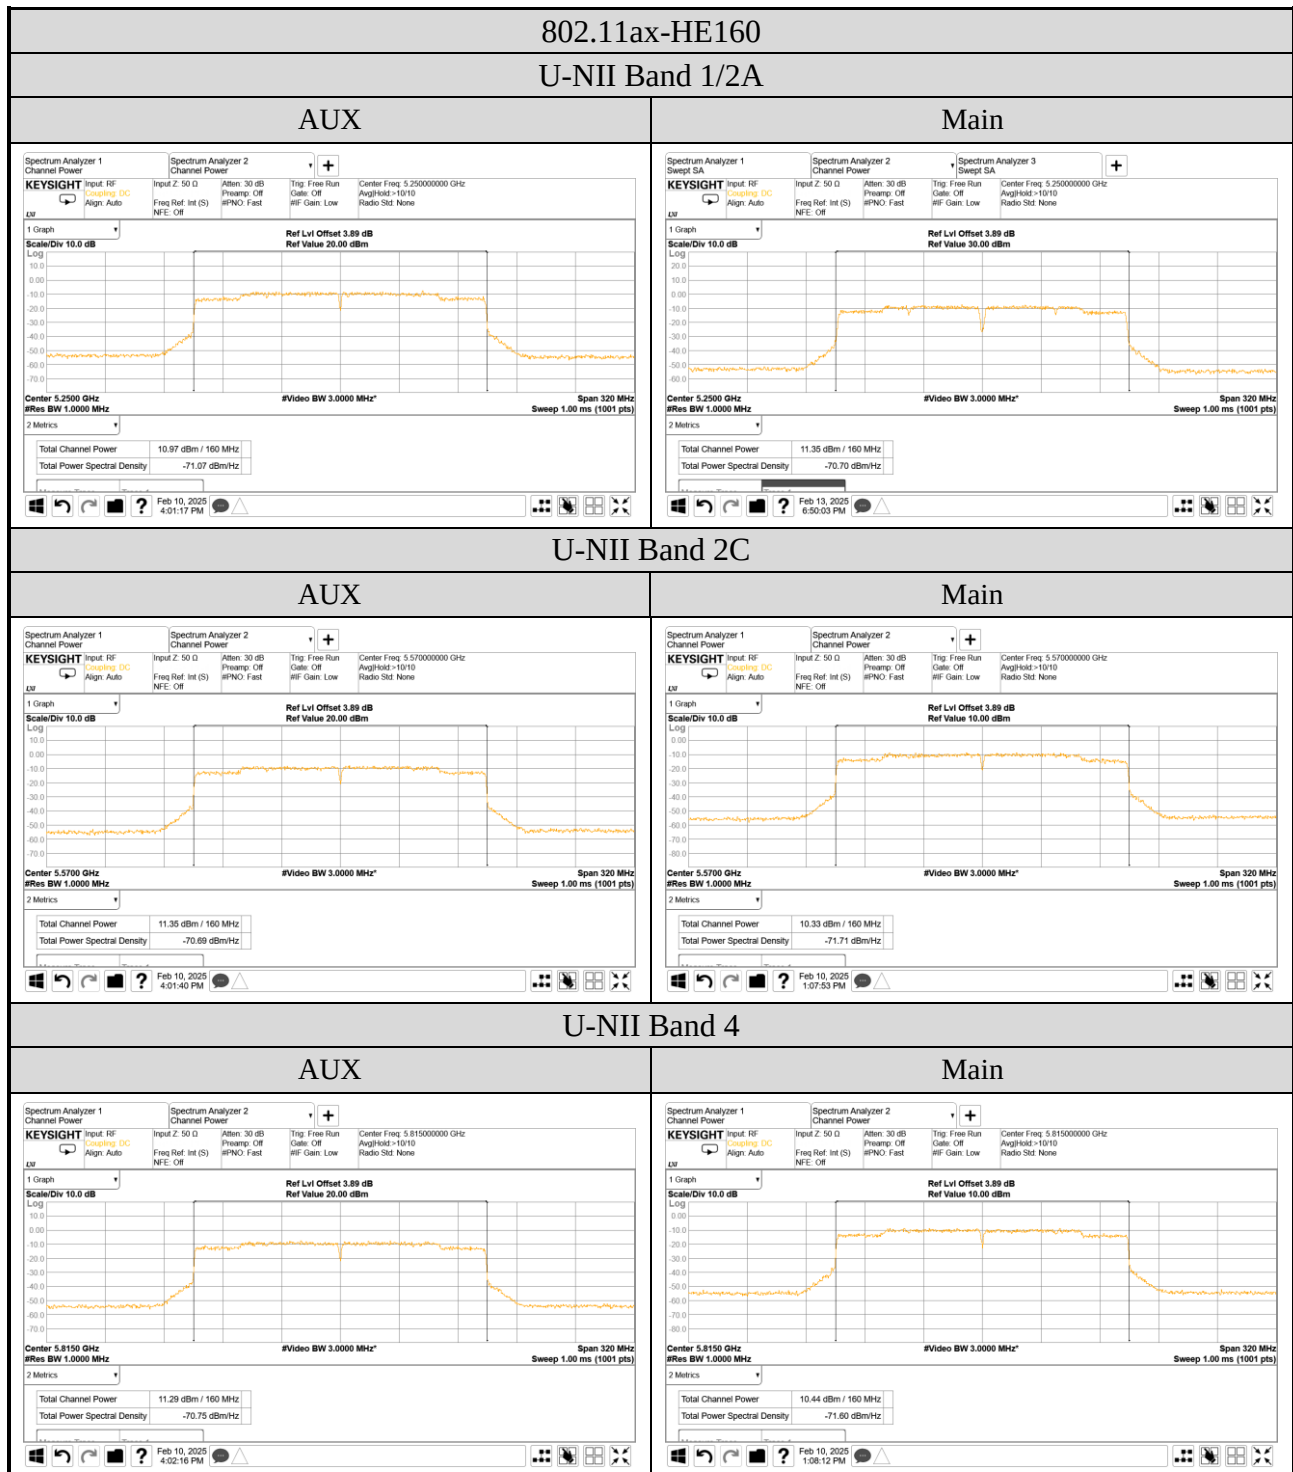


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

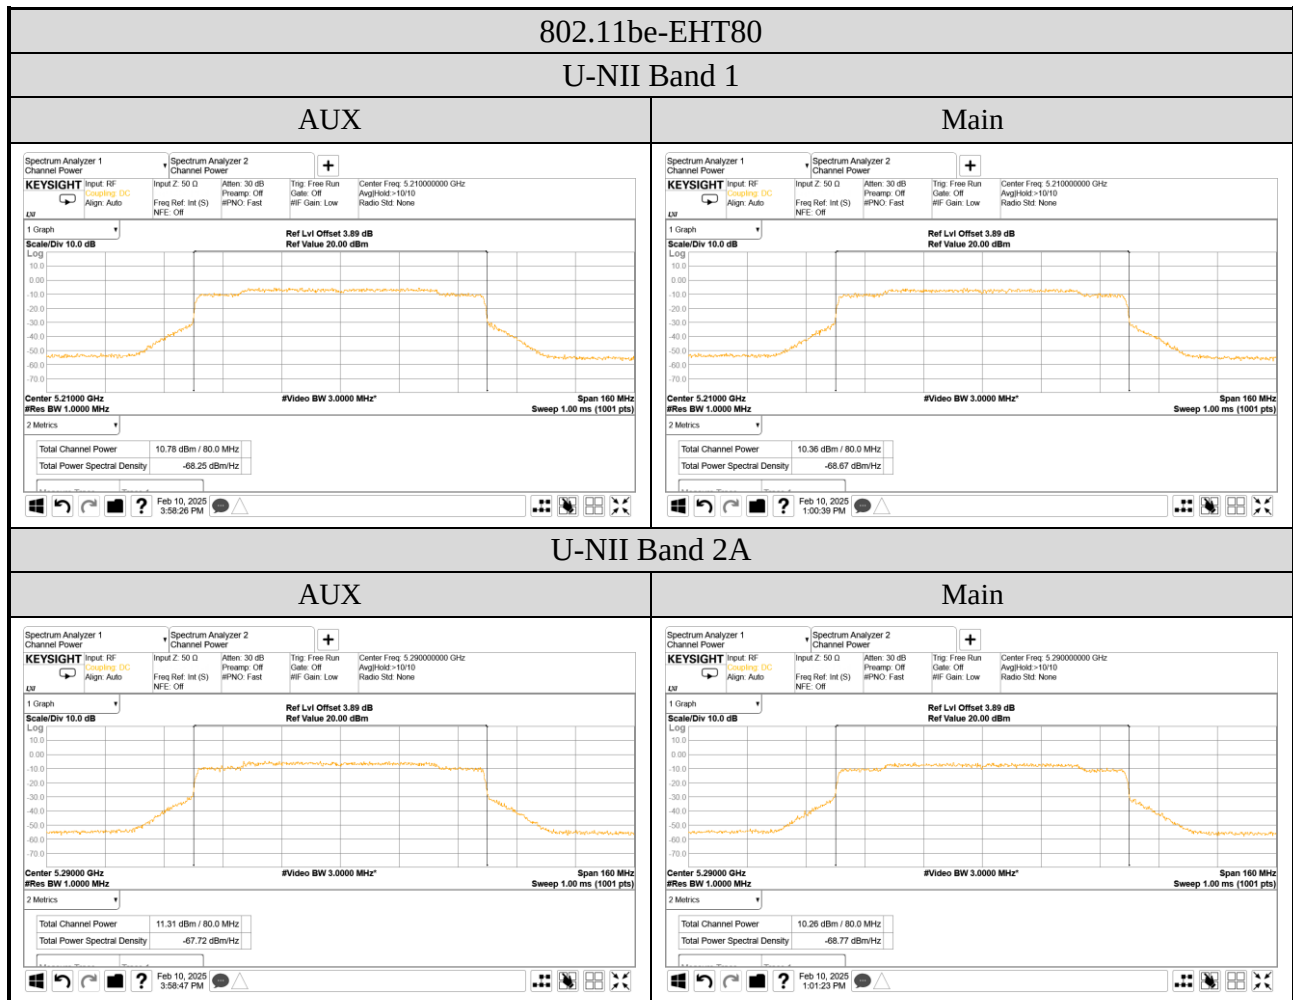


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

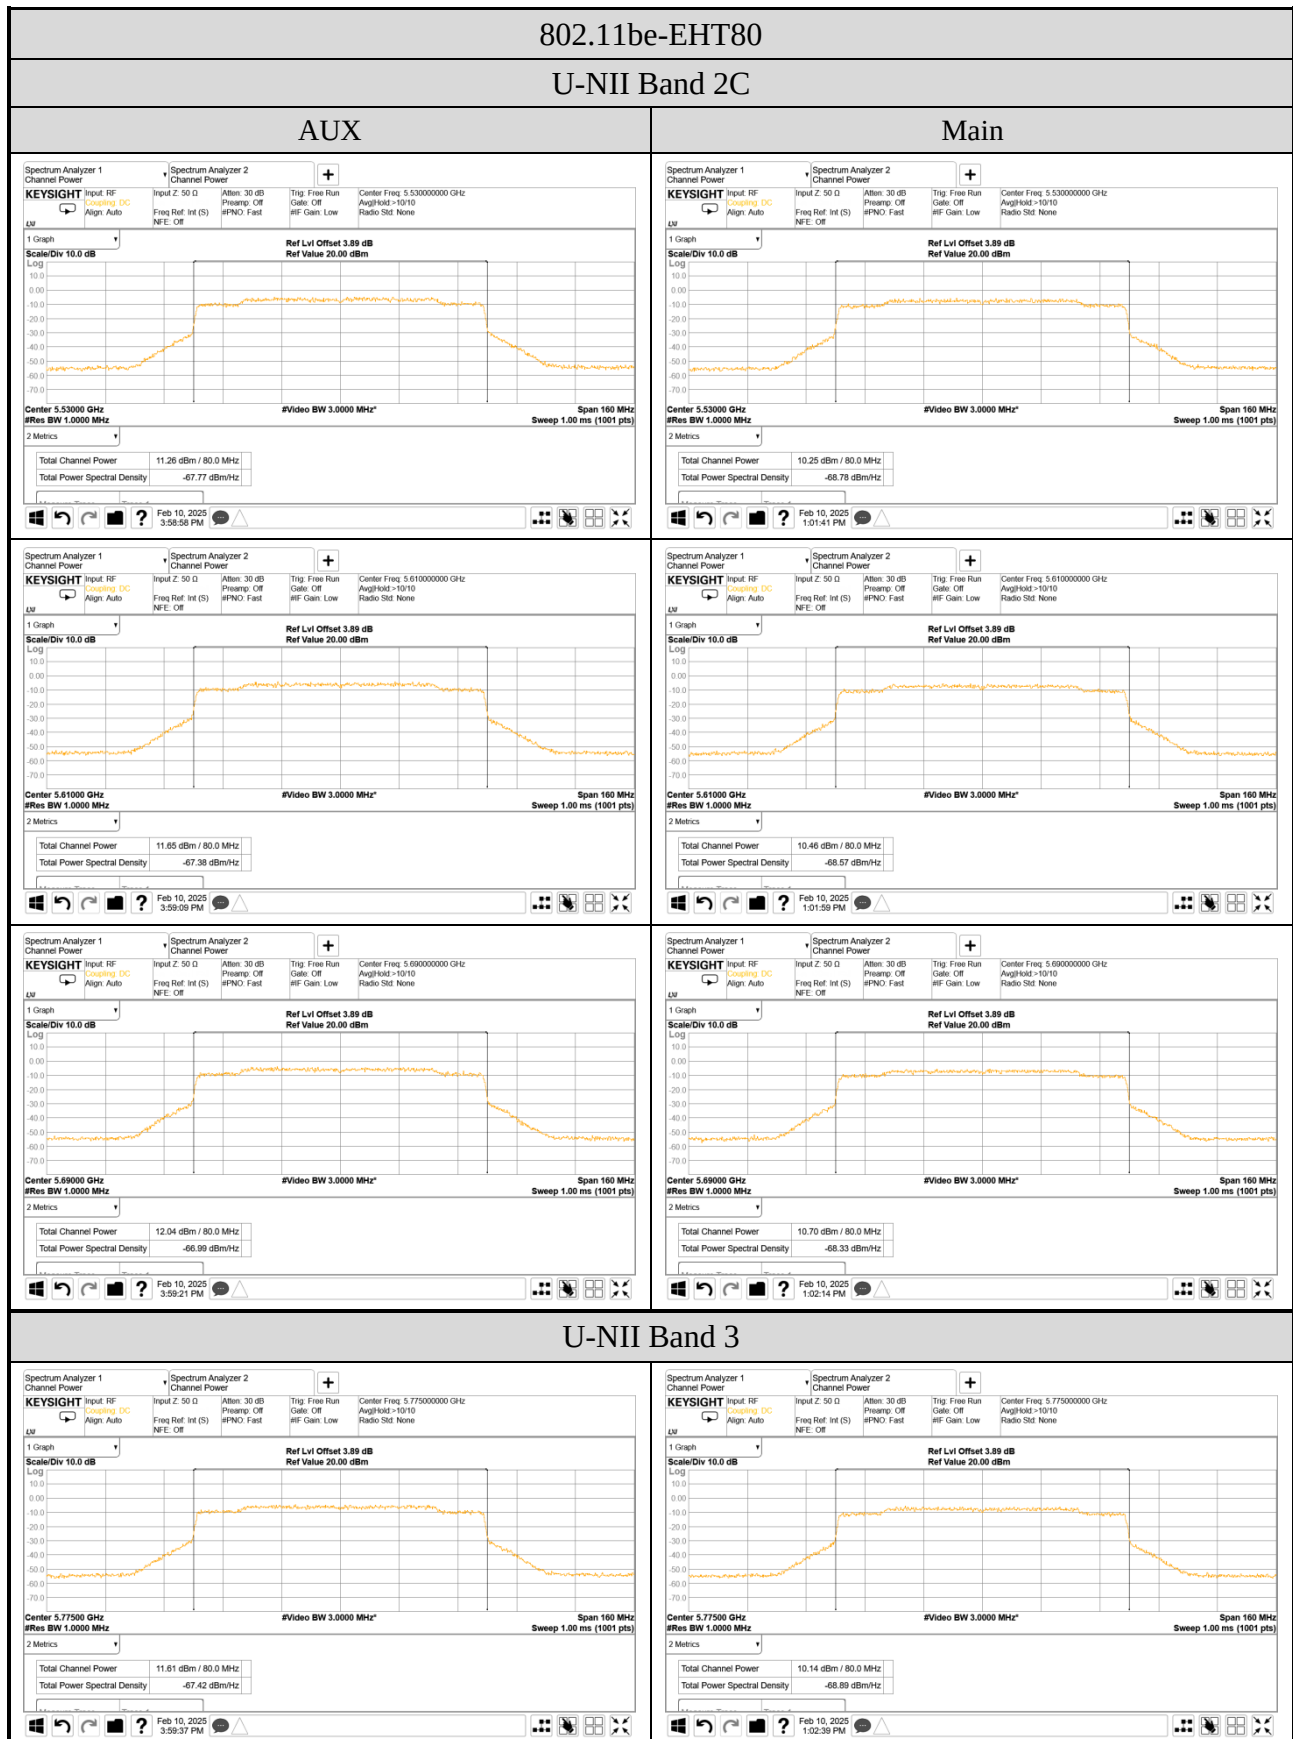


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

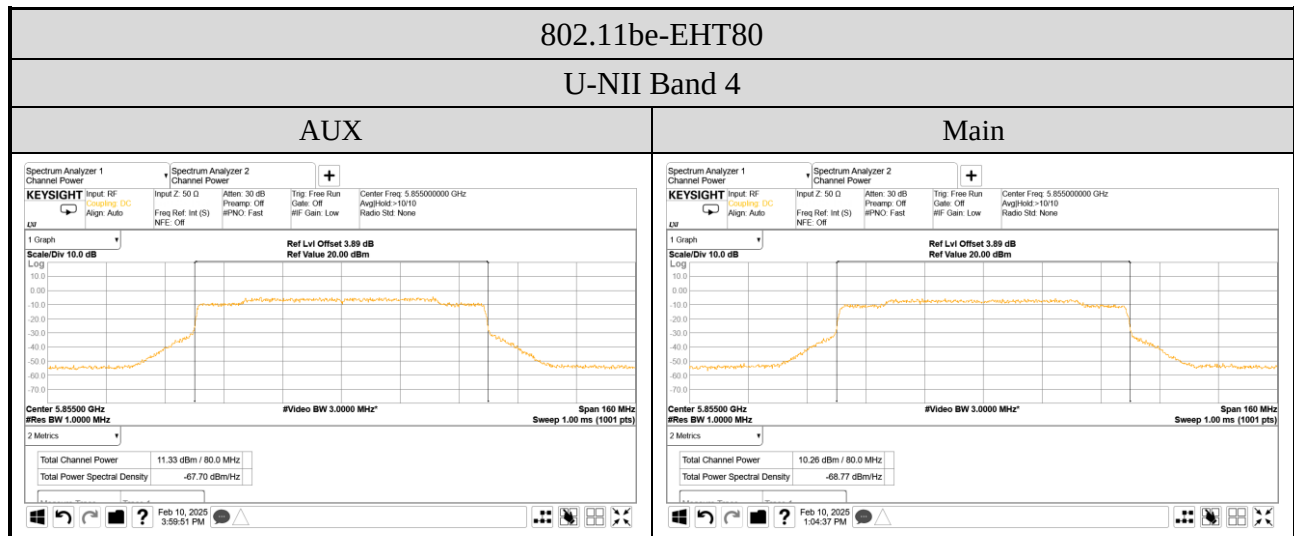


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

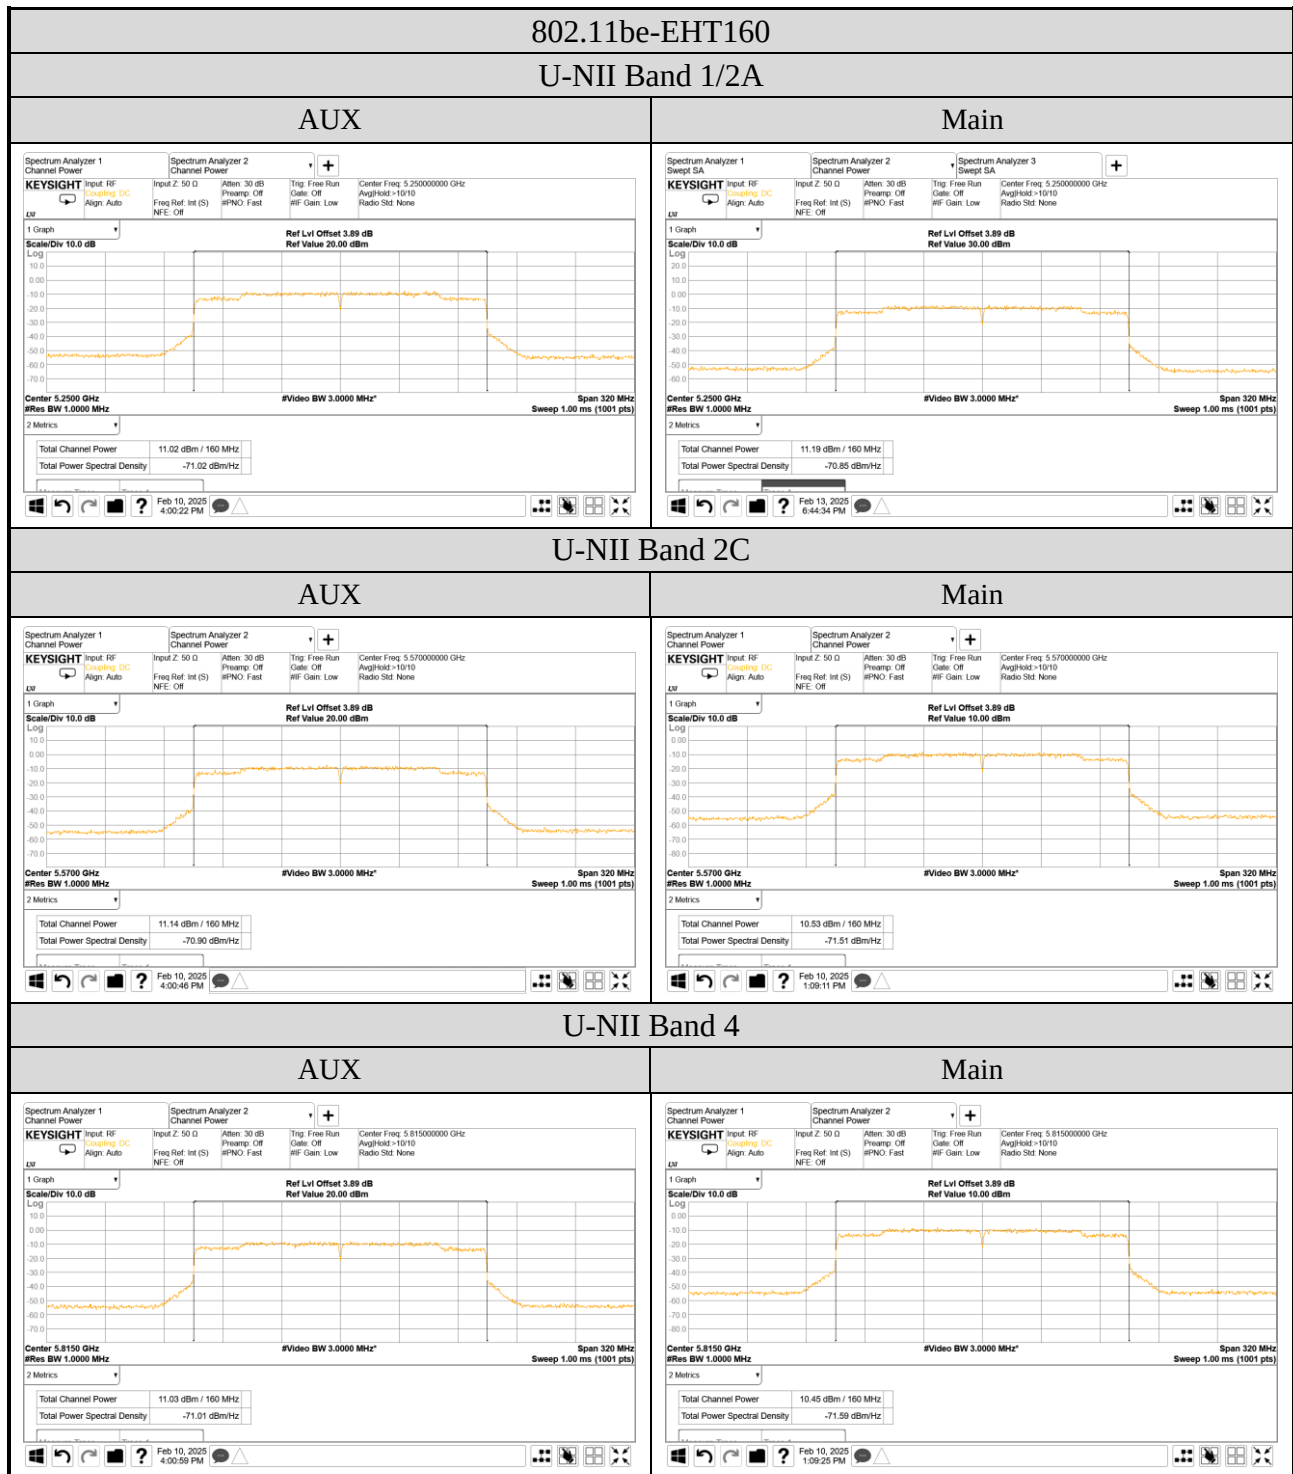


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

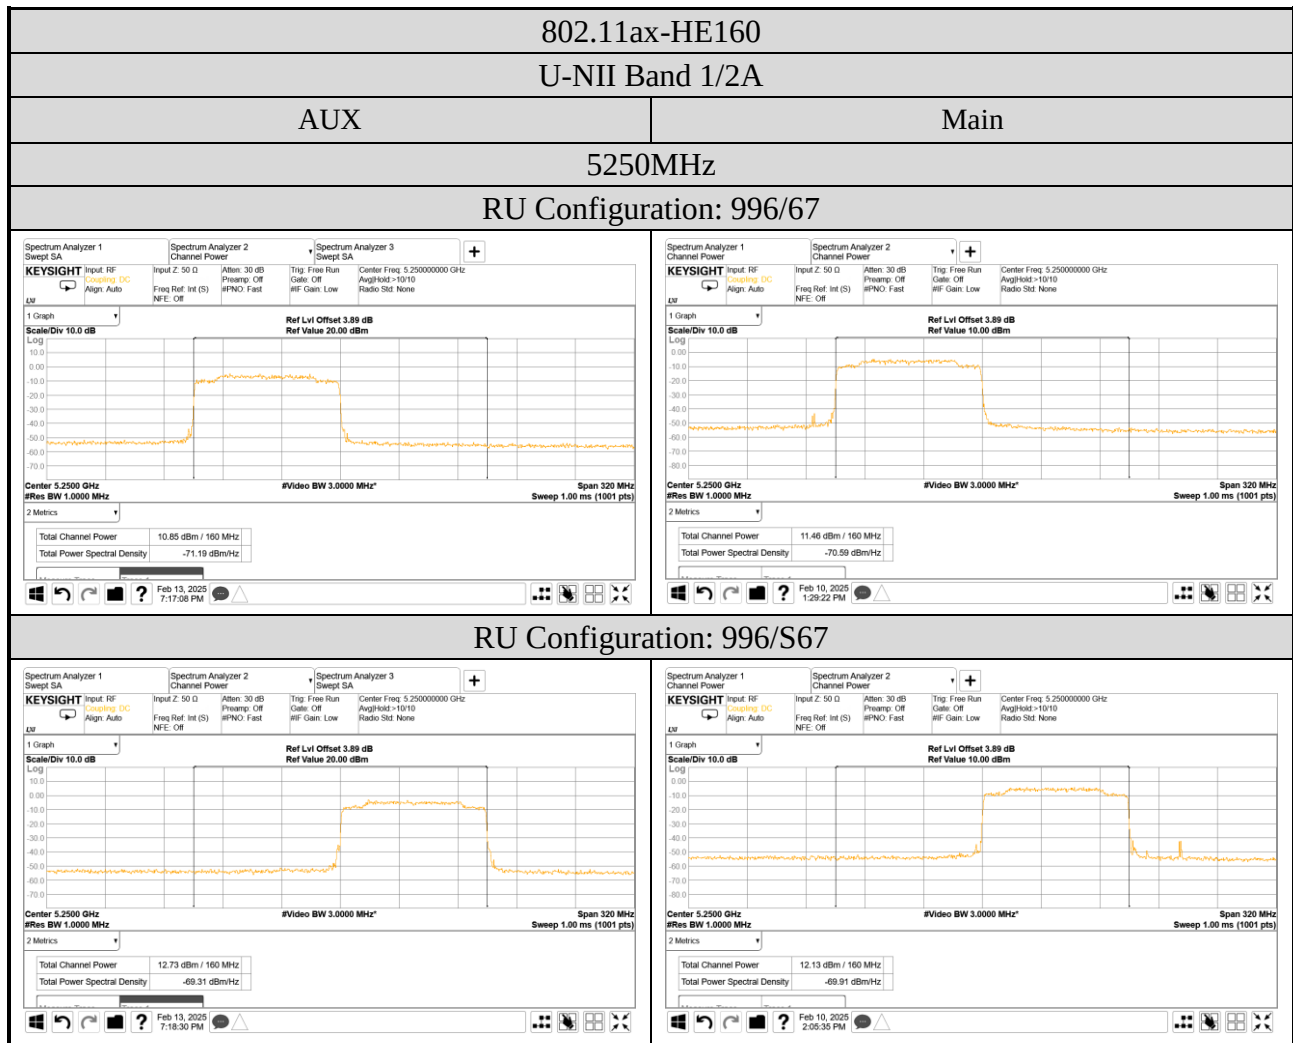


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

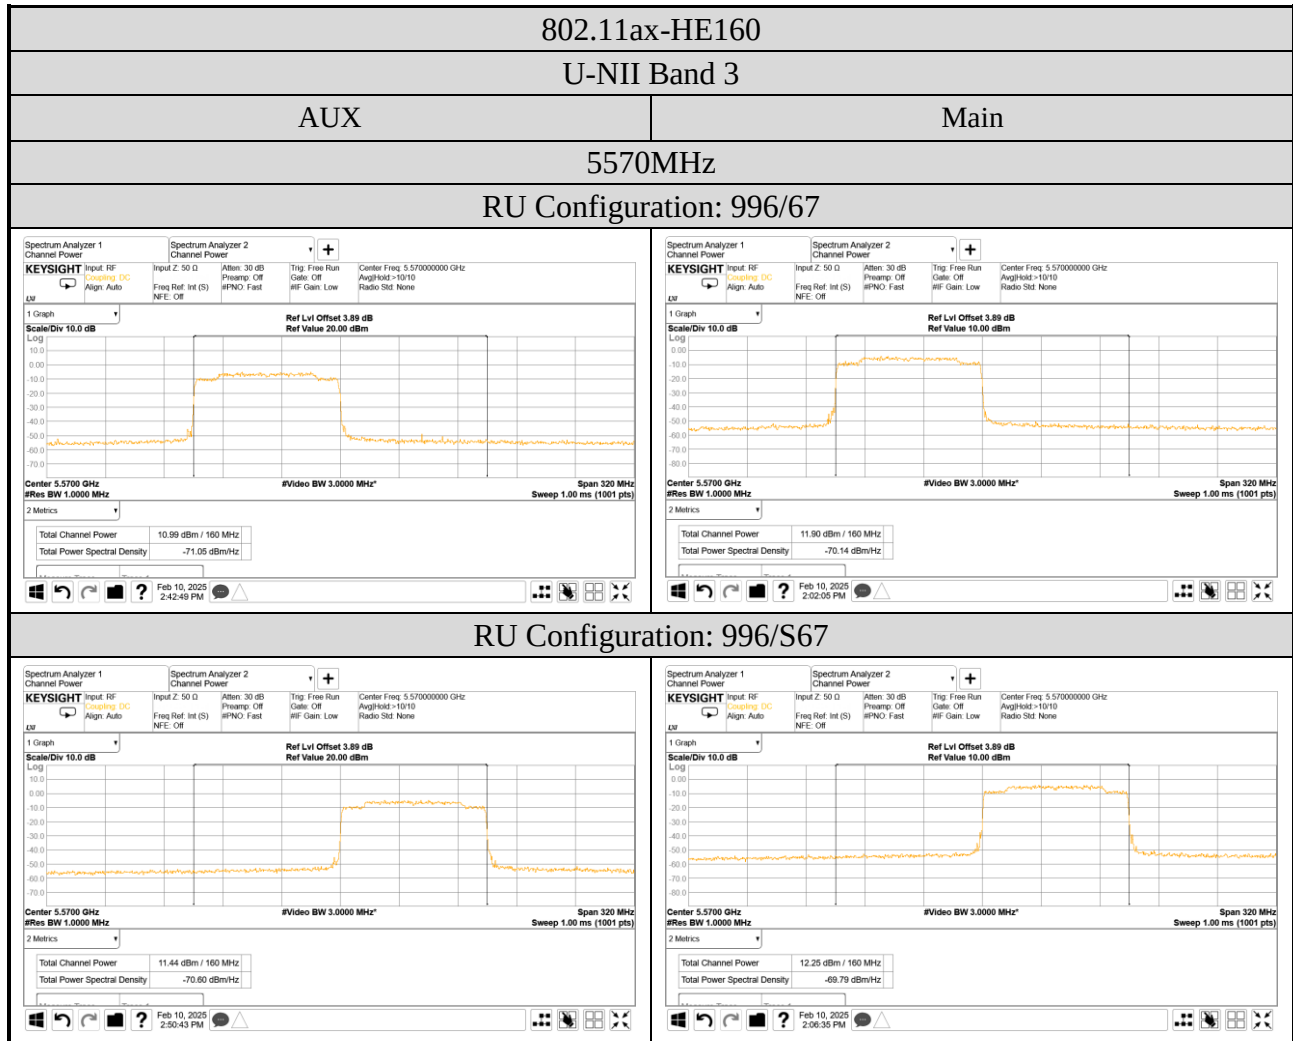

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

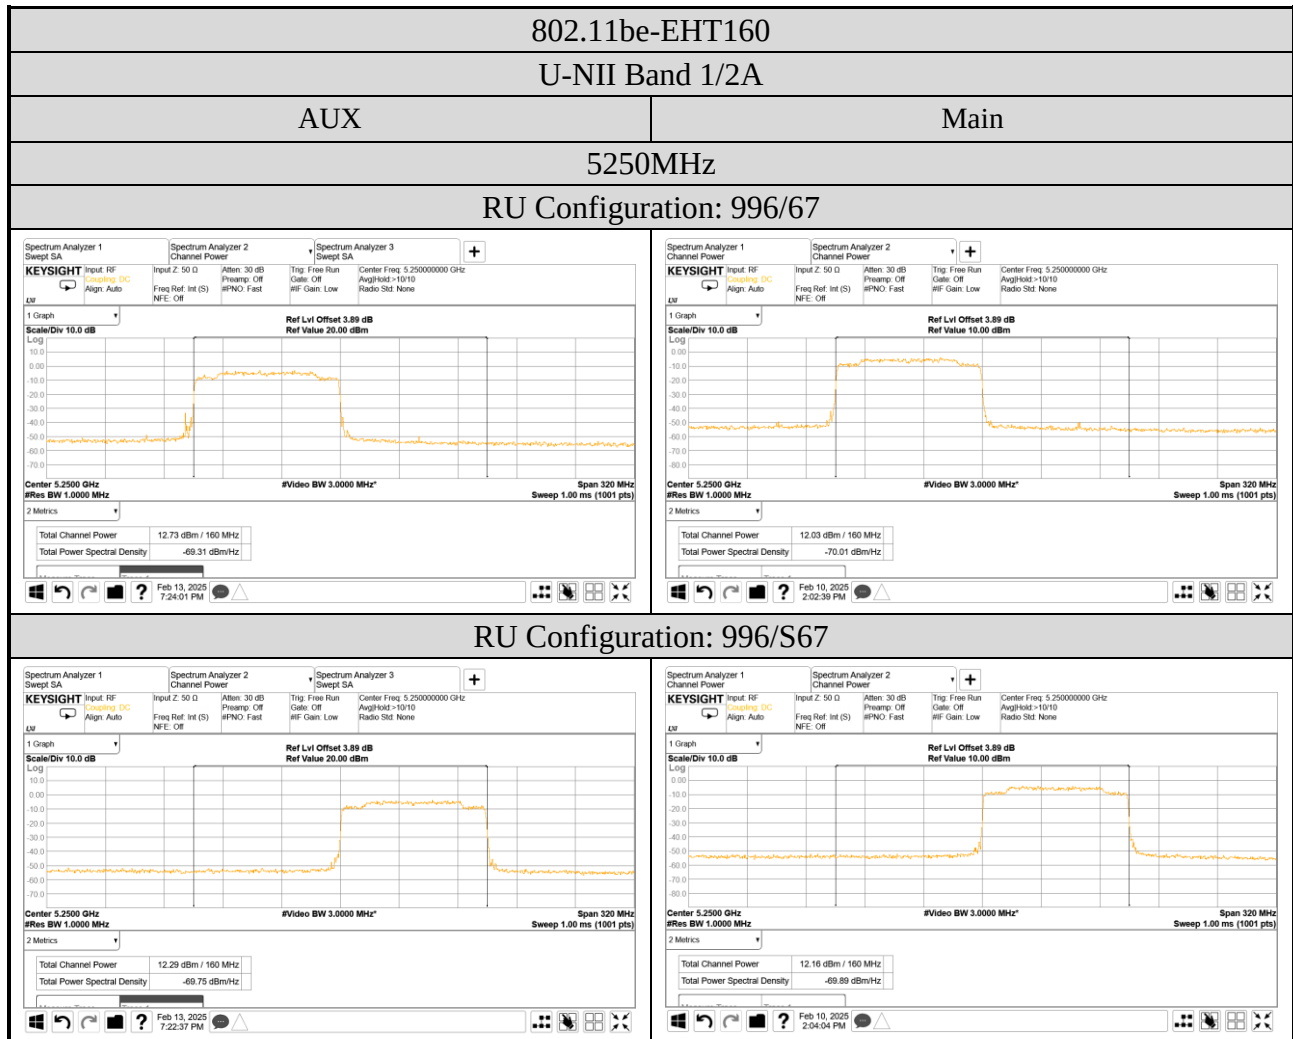

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

