

## TABLE OF CONTENTS


|                                                        |            |
|--------------------------------------------------------|------------|
| <b>A.1 CONDUCTED EMISSION .....</b>                    | <b>2</b>   |
| <b>A.2 RADIATED EMISSION .....</b>                     | <b>6</b>   |
| A.2.1 Emissions within Restricted Frequency Bands..... | 6          |
| A.2.2 Emissions outside the frequency band.....        | 148        |
| A.2.3 Emissions in Non-restricted Frequency Bands..... | 163        |
| <b>A.3 26dB/6dB BANDWIDTH .....</b>                    | <b>164</b> |
| A.3.1 26dB/6dB Bandwidth Result .....                  | 164        |
| A.3.2 Measurement Plots .....                          | 169        |
| <b>A.4 MAXIMUM OUTPUT POWER .....</b>                  | <b>189</b> |
| A.4.1 Average Output Power .....                       | 189        |
| A.4.2 Measurement Plots .....                          | 194        |
| <b>A.5 POWER SPECTRAL DENSITY .....</b>                | <b>202</b> |
| A.5.1 Power Spectral Density Result .....              | 202        |
| A.5.2 Measurement Plots .....                          | 206        |
| <b>A.6 FREQUENCY STABILITY .....</b>                   | <b>225</b> |
| A.6.1 Frequency stability Result .....                 | 225        |

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

## A.1 CONDUCTED EMISSION

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2021/07/02                    | Temp./Hum. | 26°C/53% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Roy Hung |
| Test SKU     | SKU #1 (with INPAQ Antenna)   |            |          |

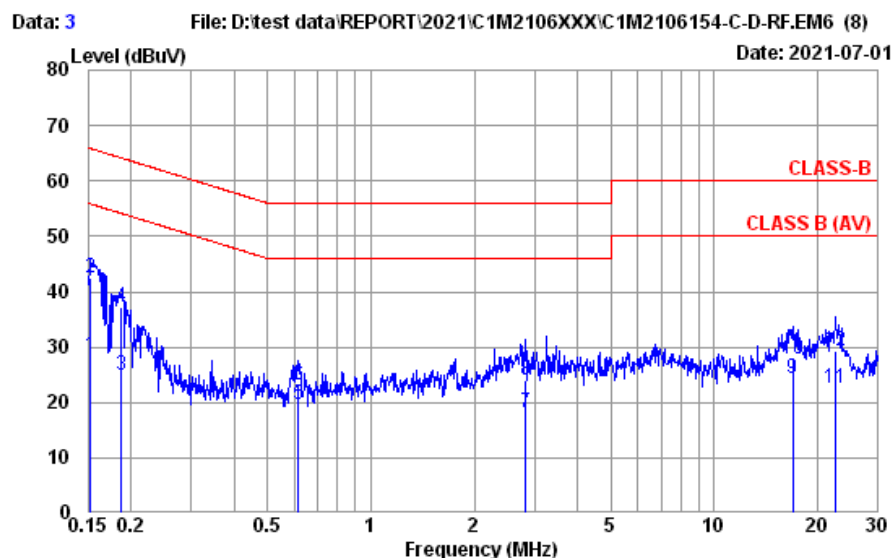

Site No. : No.8 Shielded Room Data No. : 3  
Instrument 1 : Receiver ESR3(774)  
Instrument 2 : EHV432 (567)(A) | CE-08 | ESH3-Z2 (354)  
Limit : CLASS-B Phase : NEUTRAL  
Environment : 26°C / 53% Engineer : Roy Hung  
EUT Model : 16Z95P Test Rating : 120Vac/60Hz  
Test Mode : Operating  
INPAQ


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.152          | 10.41                 | 0.03                  | 9.85                  | 8.23              | 28.52                       | 55.87            | 27.35          | Average |
| 2  | 0.152          | 10.41                 | 0.03                  | 9.85                  | 22.20             | 42.49                       | 65.87            | 23.38          | QP      |
| 3  | 0.187          | 10.39                 | 0.03                  | 9.85                  | 4.61              | 24.88                       | 54.15            | 29.27          | Average |
| 4  | 0.187          | 10.39                 | 0.03                  | 9.85                  | 17.01             | 37.28                       | 64.15            | 26.87          | QP      |
| 5  | 0.614          | 10.37                 | 0.03                  | 9.85                  | -0.56             | 19.69                       | 46.00            | 26.31          | Average |
| 6  | 0.614          | 10.37                 | 0.03                  | 9.85                  | 2.91              | 23.16                       | 56.00            | 32.84          | QP      |
| 7  | 2.824          | 10.43                 | 0.08                  | 9.86                  | -2.18             | 18.19                       | 46.00            | 27.81          | Average |
| 8  | 2.824          | 10.43                 | 0.08                  | 9.86                  | 3.54              | 23.91                       | 56.00            | 32.09          | QP      |
| 9  | 16.928         | 11.00                 | 0.18                  | 9.92                  | 3.27              | 24.37                       | 50.00            | 25.63          | Average |
| 10 | 16.928         | 11.00                 | 0.18                  | 9.92                  | 6.86              | 27.96                       | 60.00            | 32.04          | QP      |
| 11 | 22.535         | 11.18                 | 0.21                  | 9.96                  | 1.23              | 22.58                       | 50.00            | 27.42          | Average |
| 12 | 22.535         | 11.18                 | 0.21                  | 9.96                  | 7.97              | 29.32                       | 60.00            | 30.68          | QP      |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
2. If the average limit is met when using a quasi-peak detector,  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2021/07/02                    | Temp./Hum. | 26°C/53% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Roy Hung |
| Test SKU     | SKU #1 (with INPAQ Antenna)   |            |          |

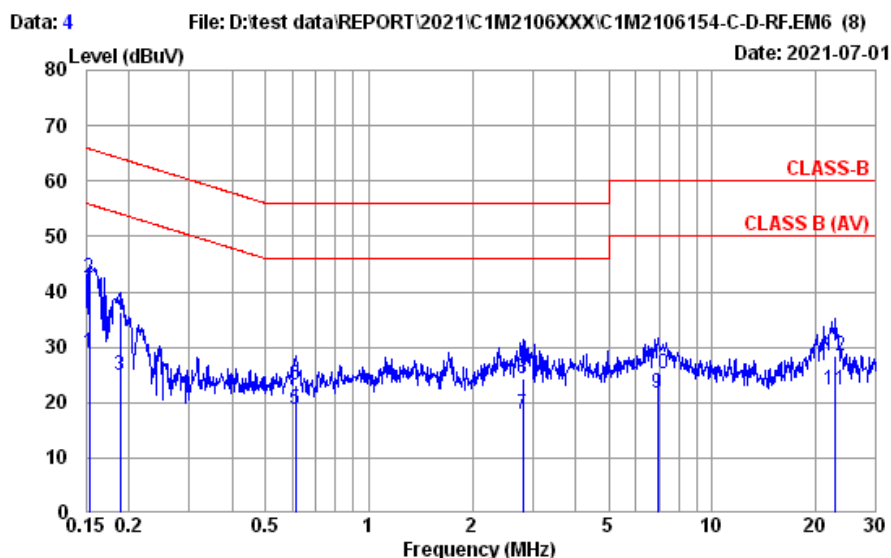

Site No. : No.8 Shielded Room Data No. : 4  
Instrument 1 : Receiver ESR3(774)  
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)  
Limit : CLASS-B Phase : LINE  
Environment : 26°C / 53% Engineer : Roy Hung  
EUT Model : 16Z95P Test Rating : 120Vac/60Hz  
Test Mode : Operating  
INPAQ


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.153          | 10.40                 | 0.03                  | 9.85                  | 8.79              | 29.07                       | 55.82            | 26.75          | Average |
| 2  | 0.153          | 10.40                 | 0.03                  | 9.85                  | 22.31             | 42.59                       | 65.82            | 23.23          | QP      |
| 3  | 0.188          | 10.39                 | 0.03                  | 9.85                  | 4.52              | 24.79                       | 54.11            | 29.32          | Average |
| 4  | 0.188          | 10.39                 | 0.03                  | 9.85                  | 16.03             | 36.30                       | 64.11            | 27.81          | QP      |
| 5  | 0.611          | 10.37                 | 0.03                  | 9.85                  | -1.58             | 18.67                       | 46.00            | 27.33          | Average |
| 6  | 0.611          | 10.37                 | 0.03                  | 9.85                  | 2.84              | 23.09                       | 56.00            | 32.91          | QP      |
| 7  | 2.809          | 10.41                 | 0.07                  | 9.86                  | -2.32             | 18.02                       | 46.00            | 27.98          | Average |
| 8  | 2.809          | 10.41                 | 0.07                  | 9.86                  | 3.96              | 24.30                       | 56.00            | 31.70          | QP      |
| 9  | 6.951          | 10.50                 | 0.12                  | 9.87                  | 1.27              | 21.76                       | 50.00            | 28.24          | Average |
| 10 | 6.951          | 10.50                 | 0.12                  | 9.87                  | 4.85              | 25.34                       | 60.00            | 34.66          | QP      |
| 11 | 22.896         | 10.80                 | 0.21                  | 9.96                  | 1.21              | 22.18                       | 50.00            | 27.82          | Average |
| 12 | 22.896         | 10.80                 | 0.21                  | 9.96                  | 7.54              | 28.51                       | 60.00            | 31.49          | QP      |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
2. If the average limit is met when using a quasi-peak detector,  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                                    |            |          |
|--------------|------------------------------------|------------|----------|
| Test Date    | 2021/07/02                         | Temp./Hum. | 26°C/53% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter)      | Tested By  | Roy Hung |
| Test SKU     | SKU #2 (with LUXSHARE-ICT Antenna) |            |          |

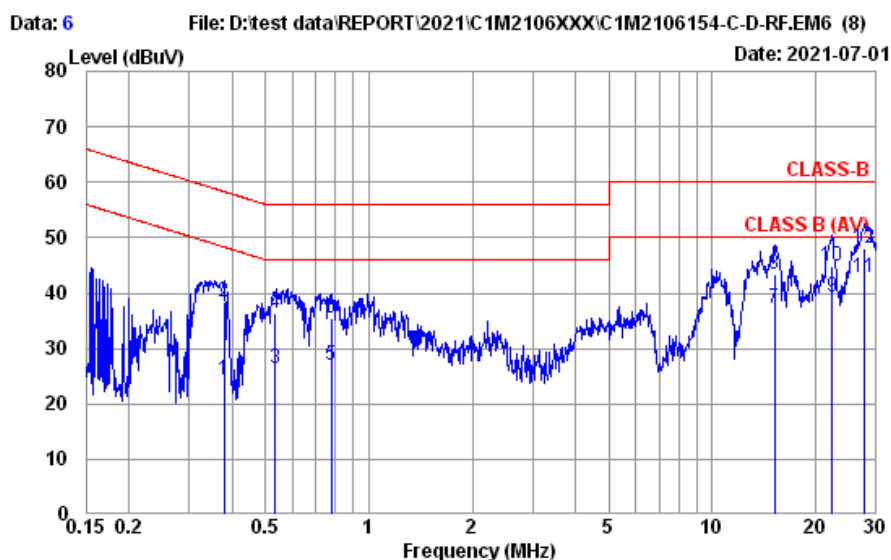

Site No. : No.8 Shielded Room Data No. : 6  
Instrument 1 : Receiver ESR3(774)  
Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
Limit : CLASS-B Phase : NEUTRAL  
Environment : 26°C / 53% Engineer : Roy Hung  
EUT Model : 16Z95P Test Rating : 120Vac/60Hz  
Test Mode : Operating  
Luxshare


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.379          | 10.37                 | 0.03                  | 9.85                  | 4.14              | 24.39                       | 48.30            | 23.91          | Average |
| 2  | 0.379          | 10.37                 | 0.03                  | 9.85                  | 18.15             | 38.40                       | 58.30            | 19.90          | QP      |
| 3  | 0.535          | 10.37                 | 0.03                  | 9.85                  | 6.22              | 26.47                       | 46.00            | 19.53          | Average |
| 4  | 0.535          | 10.37                 | 0.03                  | 9.85                  | 16.08             | 36.33                       | 56.00            | 19.67          | QP      |
| 5  | 0.775          | 10.38                 | 0.04                  | 9.85                  | 6.62              | 26.89                       | 46.00            | 19.11          | Average |
| 6  | 0.775          | 10.38                 | 0.04                  | 9.85                  | 15.21             | 35.48                       | 56.00            | 20.52          | QP      |
| 7  | 15.146         | 10.93                 | 0.17                  | 9.91                  | 16.23             | 37.24                       | 50.00            | 12.76          | Average |
| 8  | 15.146         | 10.93                 | 0.17                  | 9.91                  | 22.45             | 43.46                       | 60.00            | 16.54          | QP      |
| 9  | 22.298         | 11.17                 | 0.21                  | 9.95                  | 18.00             | 39.33                       | 50.00            | 10.67          | Average |
| 10 | 22.298         | 11.17                 | 0.21                  | 9.95                  | 23.41             | 44.74                       | 60.00            | 15.26          | QP      |
| 11 | 27.855         | 11.33                 | 0.23                  | 9.99                  | 21.16             | 42.71                       | 50.00            | 7.29           | Average |
| 12 | 27.855         | 11.33                 | 0.23                  | 9.99                  | 26.46             | 48.01                       | 60.00            | 11.99          | QP      |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
2. If the average limit is met when using a quasi-peak detector,  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

|              |                                    |            |          |
|--------------|------------------------------------|------------|----------|
| Test Date    | 2021/07/02                         | Temp./Hum. | 26°C/53% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter)      | Tested By  | Roy Hung |
| Test SKU     | SKU #2 (with LUXSHARE-ICT Antenna) |            |          |

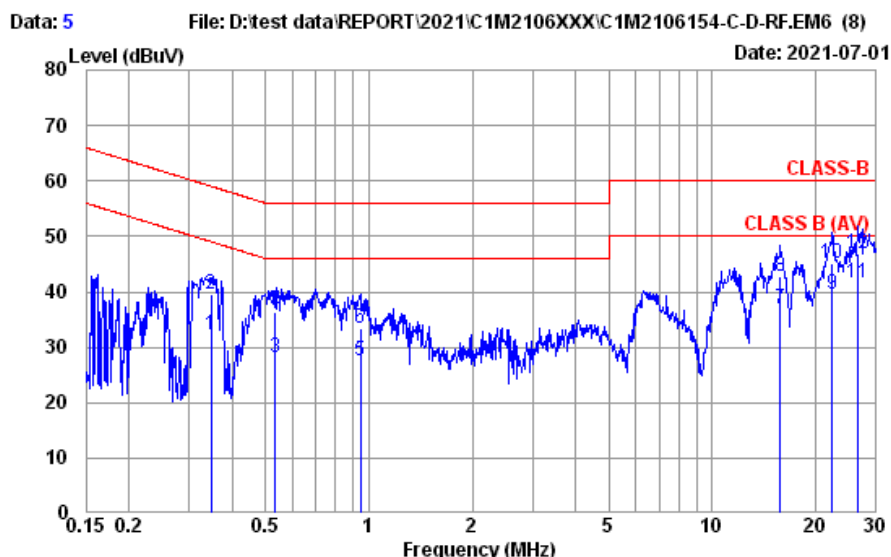

Site No. : No.8 Shielded Room Data No. : 5  
Instrument 1 : Receiver ESR3(774)  
Instrument 2 : EMI432 (567)(A) | CE-08 | ESH3-Z2 (354)  
Limit : CLASS-B Phase : LINE  
Environment : 26°C / 53% Engineer : Roy Hung  
EUT Model : 16Z95P Test Rating : 120Vac/60Hz  
Test Mode : Operating Luxshare

|    | Freq.<br>(MHz) | AMF<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.346          | 10.37                 | 0.03                  | 9.85                  | 12.02             | 32.27                       | 49.05            | 16.78          | Average |
| 2  | 0.346          | 10.37                 | 0.03                  | 9.85                  | 19.35             | 39.60                       | 59.05            | 19.45          | QP      |
| 3  | 0.535          | 10.37                 | 0.03                  | 9.85                  | 7.80              | 28.05                       | 46.00            | 17.95          | Average |
| 4  | 0.535          | 10.37                 | 0.03                  | 9.85                  | 16.06             | 36.31                       | 56.00            | 19.69          | QP      |
| 5  | 0.943          | 10.38                 | 0.04                  | 9.85                  | 7.32              | 27.59                       | 46.00            | 18.41          | Average |
| 6  | 0.943          | 10.38                 | 0.04                  | 9.85                  | 13.03             | 33.30                       | 56.00            | 22.70          | QP      |
| 7  | 15.801         | 10.70                 | 0.18                  | 9.92                  | 16.26             | 37.06                       | 50.00            | 12.94          | Average |
| 8  | 15.801         | 10.70                 | 0.18                  | 9.92                  | 21.93             | 42.73                       | 60.00            | 17.27          | QP      |
| 9  | 22.298         | 10.80                 | 0.21                  | 9.95                  | 18.75             | 39.71                       | 50.00            | 10.29          | Average |
| 10 | 22.298         | 10.80                 | 0.21                  | 9.95                  | 24.08             | 45.04                       | 60.00            | 14.96          | QP      |
| 11 | 26.558         | 10.84                 | 0.23                  | 9.98                  | 20.68             | 41.73                       | 50.00            | 8.27           | Average |
| 12 | 26.558         | 10.84                 | 0.23                  | 9.98                  | 25.76             | 46.81                       | 60.00            | 13.19          | QP      |

Remarks: 1. Emission Level= AMF Factor + Cable Loss + Pulse Att. + Reading.  
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## A.2 RADIATED EMISSION

|              |                               |            |                    |
|--------------|-------------------------------|------------|--------------------|
| Test Date    | 2021/06/28 ~ 30               | Temp./Hum. | 23 ~ 28°C/54 ~ 57% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Kuper Hsu          |
| Test SKU     | SKU #1 (with INPAQ Antenna)   |            |                    |

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5690MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 84.320                   | 15.08                 | 0.82            | 32.58                  | 51.73             | 35.05                   | 40.00           | 4.95        | Peak     |
| 127.970                  | 18.42                 | 0.98            | 32.52                  | 47.75             | 34.63                   | 43.50           | 8.87        | Peak     |
| 338.460                  | 21.00                 | 1.66            | 32.46                  | 53.53             | 43.73                   | 46.00           | 2.27        | Peak     |
| 508.210                  | 24.34                 | 2.23            | 32.44                  | 46.28             | 40.41                   | 46.00           | 5.59        | Peak     |
| 847.710                  | 29.15                 | 3.07            | 31.91                  | 43.24             | 43.55                   | 46.00           | 2.45        | Peak     |
| 967.990                  | 30.33                 | 3.22            | 31.15                  | 29.92             | 32.32                   | 54.00           | 21.68       | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 33.880                   | 19.23                 | 0.56            | 32.66                  | 51.23             | 38.36                   | 40.00           | 1.64        | Peak     |
| 168.710                  | 19.13                 | 1.12            | 32.48                  | 53.71             | 41.48                   | 43.50           | 2.02        | Peak     |
| 338.460                  | 21.00                 | 1.66            | 32.46                  | 51.69             | 41.89                   | 46.00           | 4.11        | Peak     |
| 508.210                  | 24.34                 | 2.23            | 32.44                  | 44.98             | 39.11                   | 46.00           | 6.89        | Peak     |
| 763.320                  | 28.35                 | 2.96            | 32.17                  | 36.69             | 35.83                   | 46.00           | 10.17       | Peak     |
| 963.140                  | 30.27                 | 3.21            | 31.15                  | 32.13             | 34.46                   | 54.00           | 19.54       | Peak     |


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

### A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


#### Band Edge:

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | I          |
|      |         | Frequency  | TX 5180MHz |

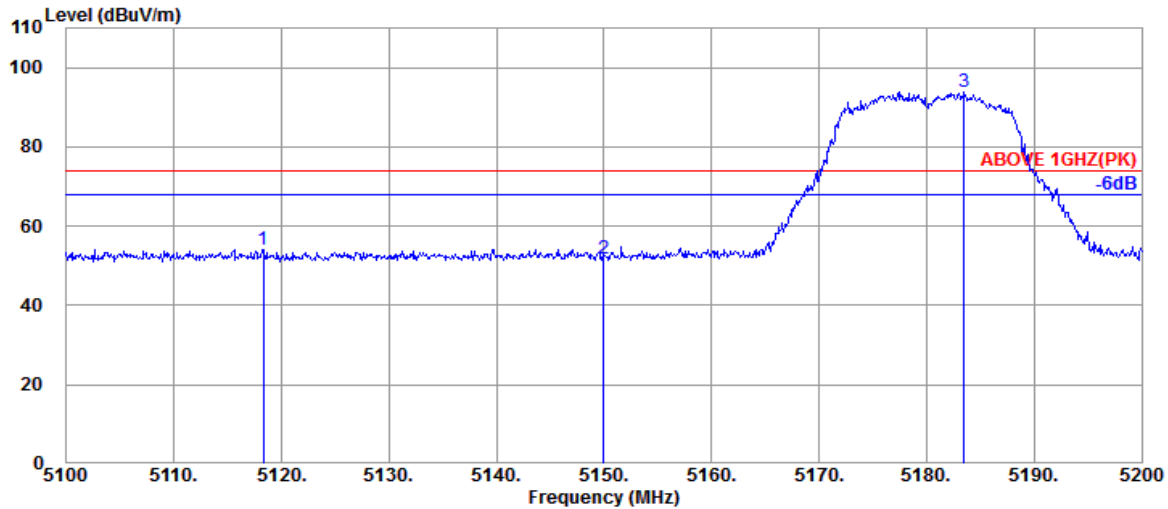

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5143.400                 | 34.20                 | 10.70           | 34.36                  | 48.42             | 58.96                   | 74.00           | 15.04       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 46.33             | 56.88                   | 74.00           | 17.12       | Peak     |
| @ 5178.500               | 34.20                 | 10.72           | 34.34                  | 93.01             | 103.59                  | ---             | ---         | Peak     |

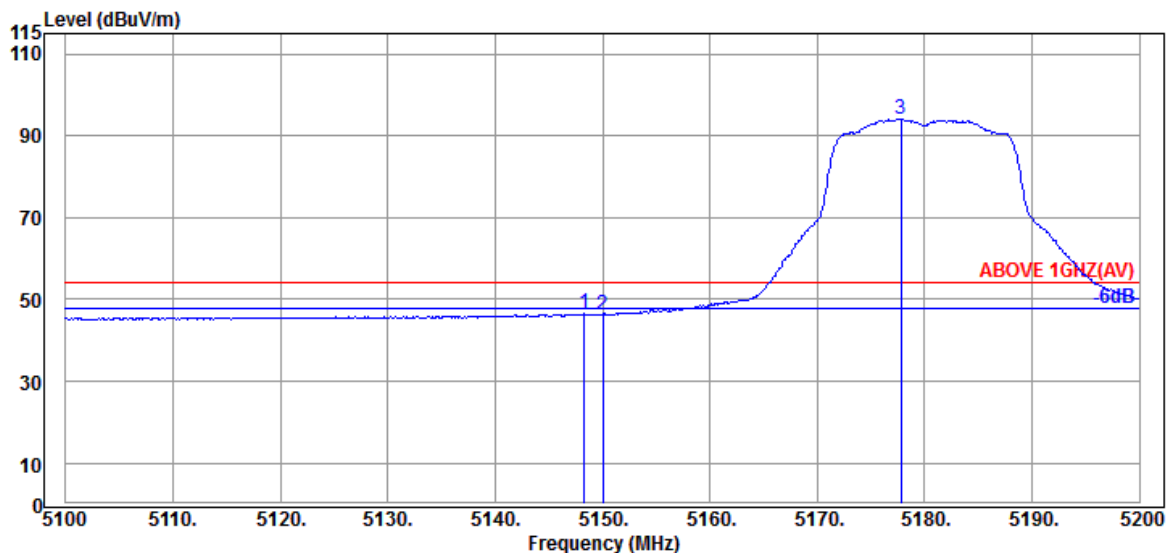

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.300                 | 34.20                 | 10.70           | 34.35                  | 35.89             | 46.44                   | 54.00           | 7.56        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 35.68             | 46.23                   | 54.00           | 7.77        | Average  |
| @ 5177.800               | 34.20                 | 10.72           | 34.34                  | 83.50             | 94.08                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | I          |
|------|---------|------------|------------|
|      |         | Frequency  | TX 5180MHz |

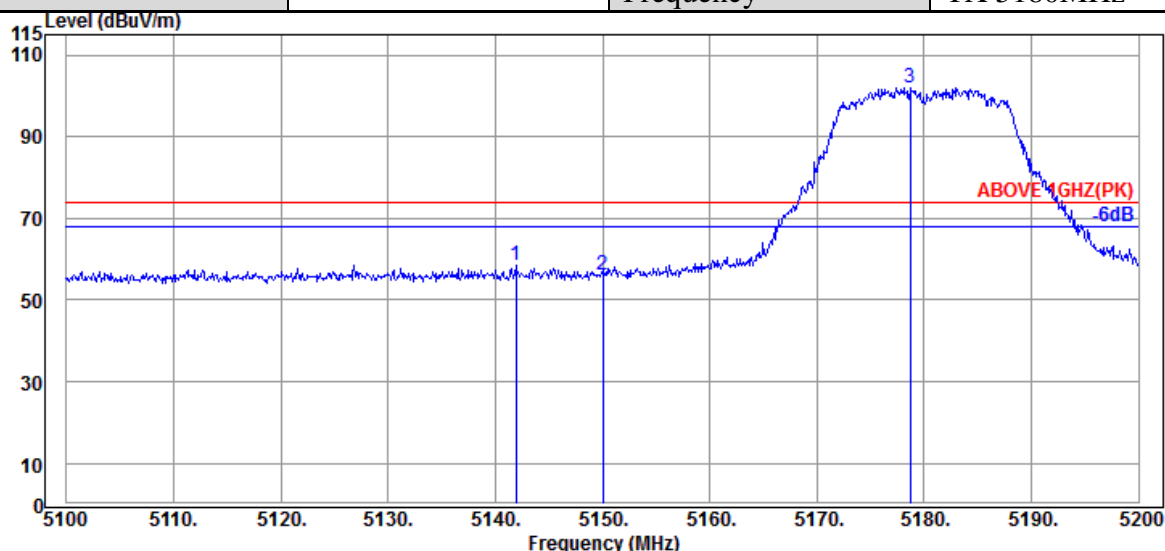

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5141.900                 | 34.20                 | 10.70           | 34.36            | 48.11             | 58.65                   | 74.00           | 15.35       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35            | 45.67             | 56.22                   | 74.00           | 17.78       | Peak     |
| @ 5178.700               | 34.20                 | 10.72           | 34.34            | 91.50             | 102.08                  | ---             | ---         | Peak     |

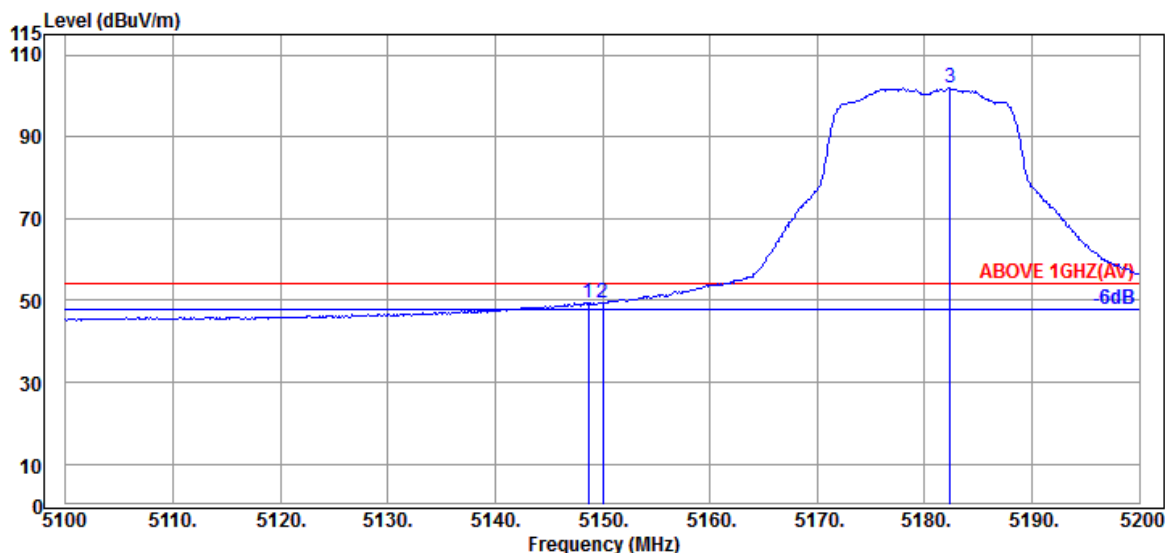

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.700                 | 34.20                 | 10.70           | 34.35            | 38.79             | 49.34                   | 54.00           | 4.66        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35            | 38.82             | 49.37                   | 54.00           | 4.63        | Average  |
| @ 5182.400               | 34.20                 | 10.72           | 34.34            | 91.32             | 101.90                  | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2A         |
|      |         | Frequency  | TX 5320MHz |

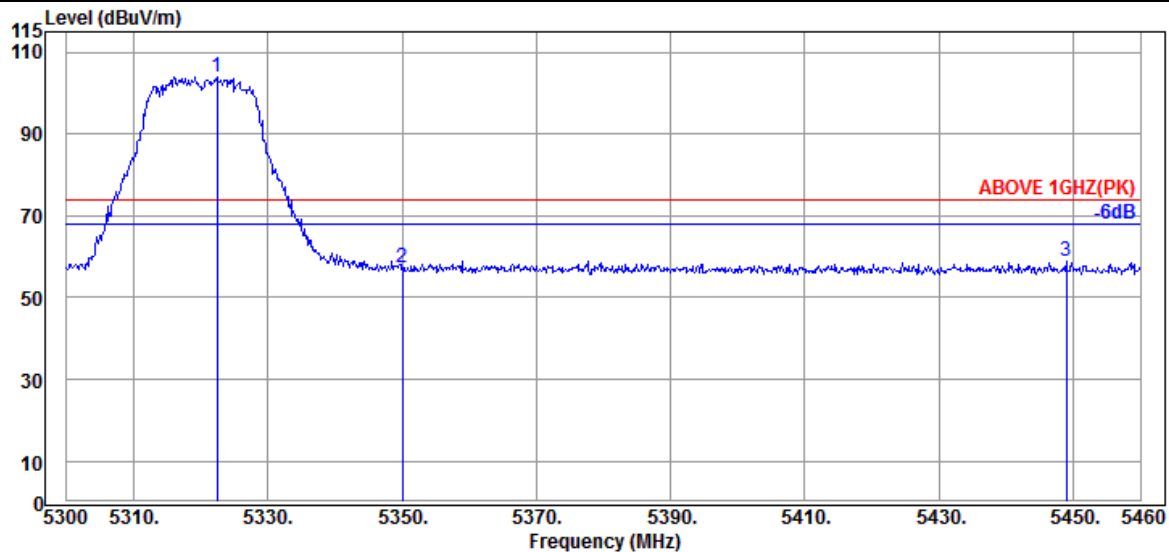

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5322.400                 | 34.53                 | 10.83           | 34.28                  | 92.83             | 103.91                  | ---             | ---         | Peak     |
|   | 5350.080                 | 34.60                 | 10.83           | 34.27                  | 46.13             | 57.29                   | 74.00           | 16.71       | Peak     |
|   | 5448.960                 | 34.50                 | 10.89           | 34.25                  | 47.78             | 58.92                   | 74.00           | 15.08       | Peak     |

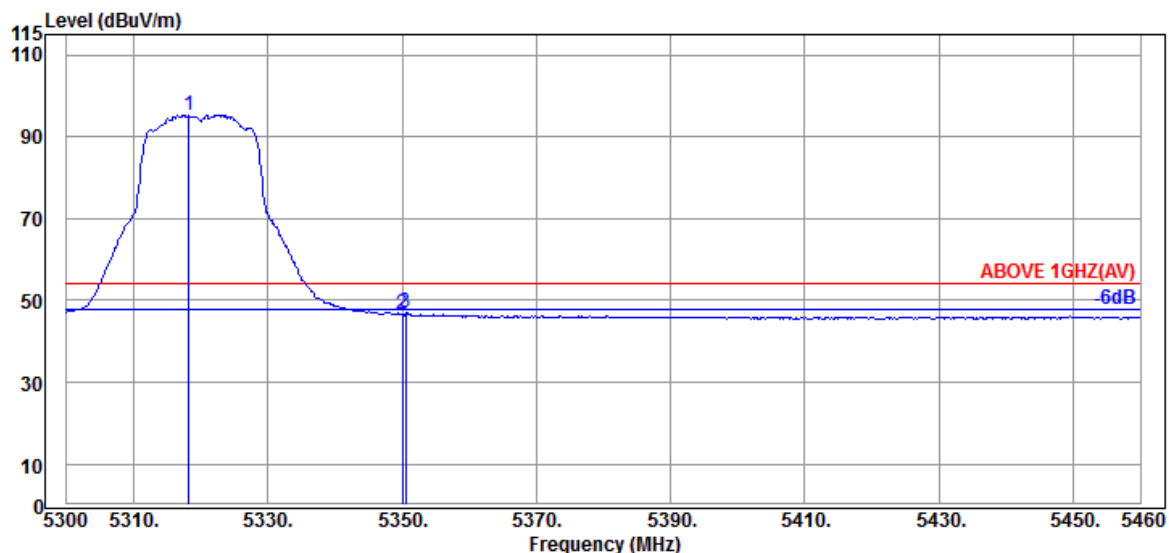


#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5318.240                 | 34.53                 | 10.81           | 34.29                  | 84.27             | 95.32                   | ---             | ---         | Average  |
|   | 5350.080                 | 34.60                 | 10.83           | 34.27                  | 35.36             | 46.52                   | 54.00           | 7.48        | Average  |
|   | 5350.560                 | 34.60                 | 10.83           | 34.27                  | 35.87             | 47.03                   | 54.00           | 6.97        | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2A         |
|      |         | Frequency  | TX 5320MHz |

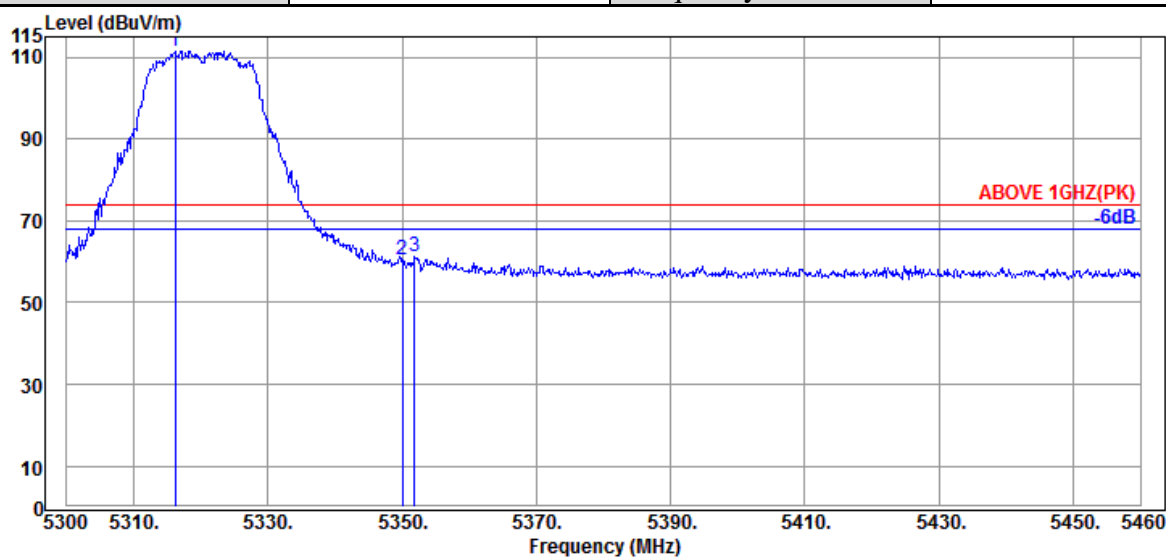

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5316.160                 | 34.53                 | 10.81           | 34.29                  | 100.48            | 111.53                  | ---             | ---         | Peak     |
|   | 5350.080                 | 34.60                 | 10.83           | 34.27                  | 49.41             | 60.57                   | 74.00           | 13.43       | Peak     |
|   | 5351.840                 | 34.60                 | 10.83           | 34.27                  | 50.17             | 61.33                   | 74.00           | 12.67       | Peak     |

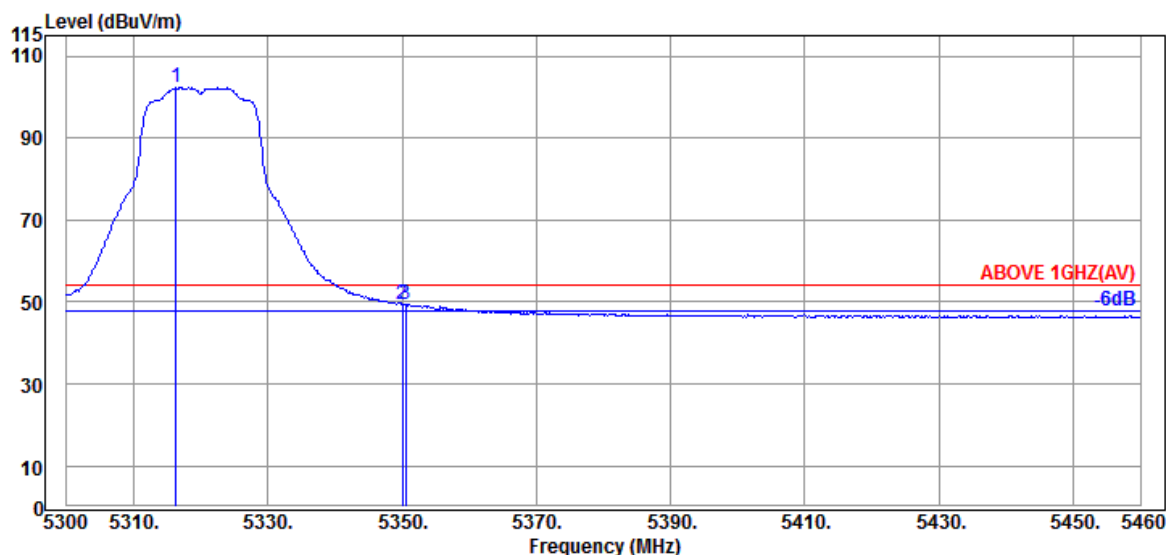


## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5316.320                 | 34.53                 | 10.81           | 34.29                  | 91.36             | 102.41                  | ---             | ---         | Average  |
|   | 5350.080                 | 34.60                 | 10.83           | 34.27                  | 38.21             | 49.37                   | 54.00           | 4.63        | Average  |
|   | 5350.560                 | 34.60                 | 10.83           | 34.27                  | 38.41             | 49.57                   | 54.00           | 4.43        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5500MHz |

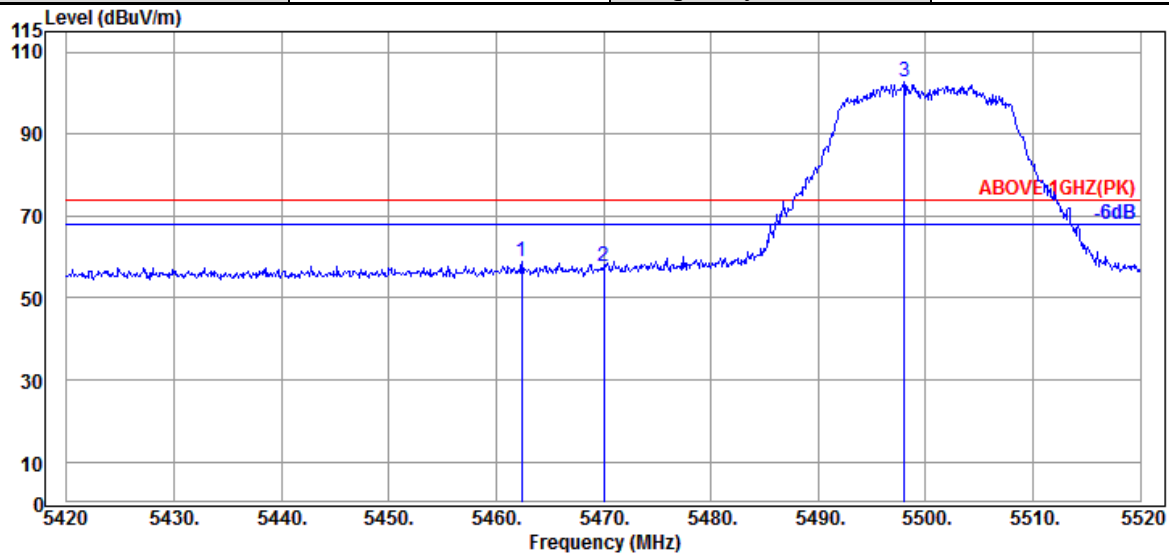

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5462.400                 | 34.50                 | 10.91           | 34.24                  | 47.59             | 58.76                   | 74.00           | 15.24       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 46.75             | 57.89                   | 74.00           | 16.11       | Peak     |
| @ 5498.000               | 34.40                 | 10.93           | 34.23                  | 91.51             | 102.61                  | ---             | ---         | Peak     |

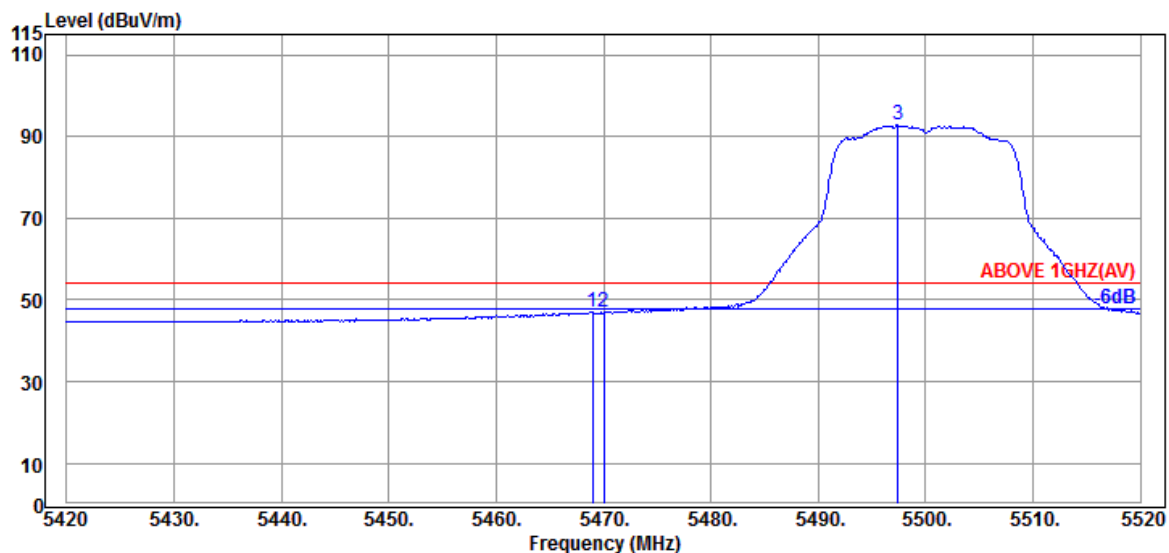


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.000                 | 34.47                 | 10.91           | 34.24                  | 36.05             | 47.19                   | 54.00           | 6.81        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 35.87             | 47.01                   | 54.00           | 6.99        | Average  |
| @ 5497.400               | 34.40                 | 10.93           | 34.23                  | 81.63             | 92.73                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5500MHz |

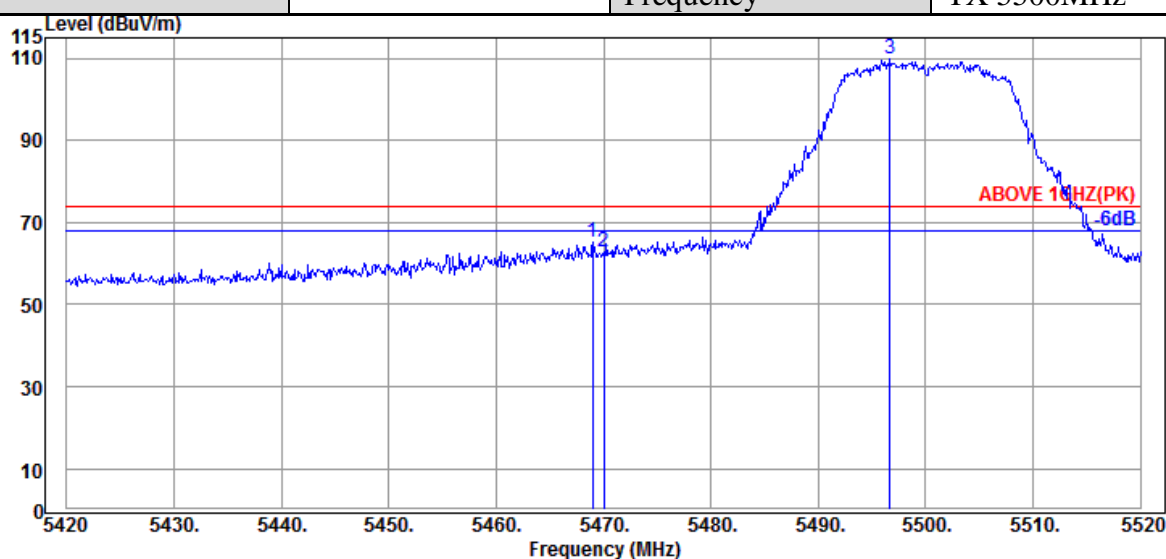

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.000                 | 34.47                 | 10.91           | 34.24            | 53.95             | 65.09                   | 74.00           | 8.91        | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 51.83             | 62.97                   | 74.00           | 11.03       | Peak     |
| @ 5496.700               | 34.40                 | 10.93           | 34.23            | 98.59             | 109.69                  | ---             | ---         | Peak     |

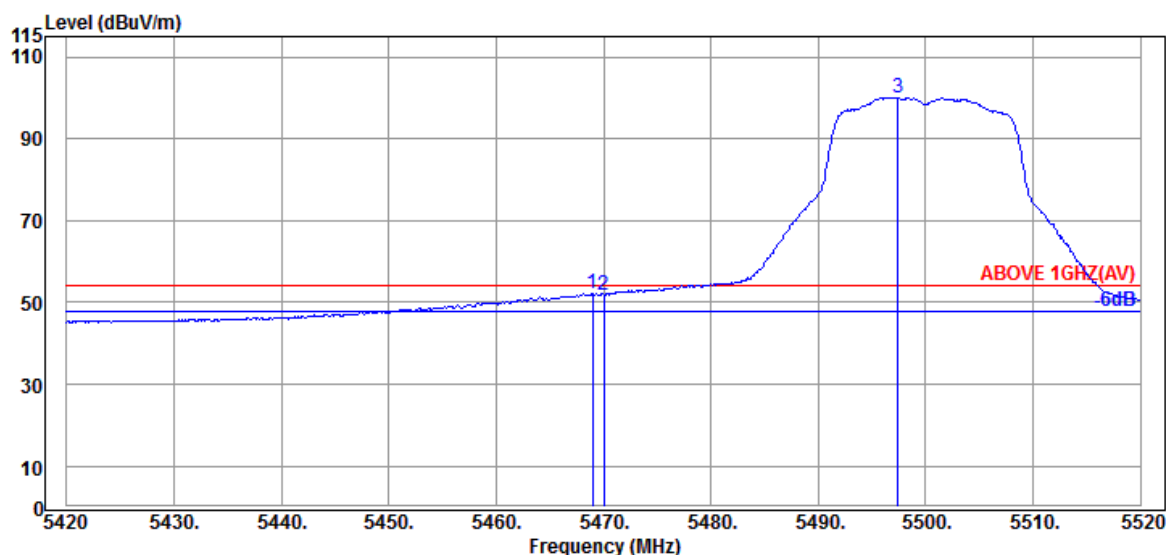

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.000                 | 34.47                 | 10.91           | 34.24            | 41.07             | 52.21                   | 54.00           | 1.79        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 40.78             | 51.92                   | 54.00           | 2.08        | Average  |
| @ 5497.400               | 34.40                 | 10.93           | 34.23            | 89.07             | 100.17                  | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5700MHz |

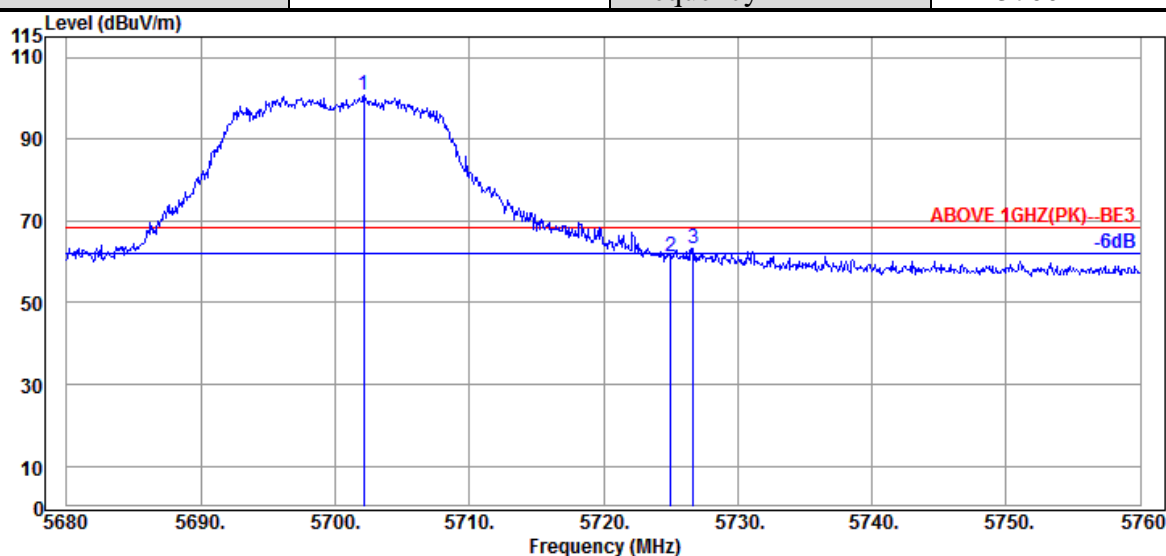

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5702.160               | 34.40                 | 11.03           | 34.31            | 89.66             | 100.78                  | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32            | 49.91             | 61.31                   | 68.20           | 6.89        | Peak     |
| 5726.720                 | 34.67                 | 11.05           | 34.32            | 51.88             | 63.28                   | 68.20           | 4.92        | Peak     |

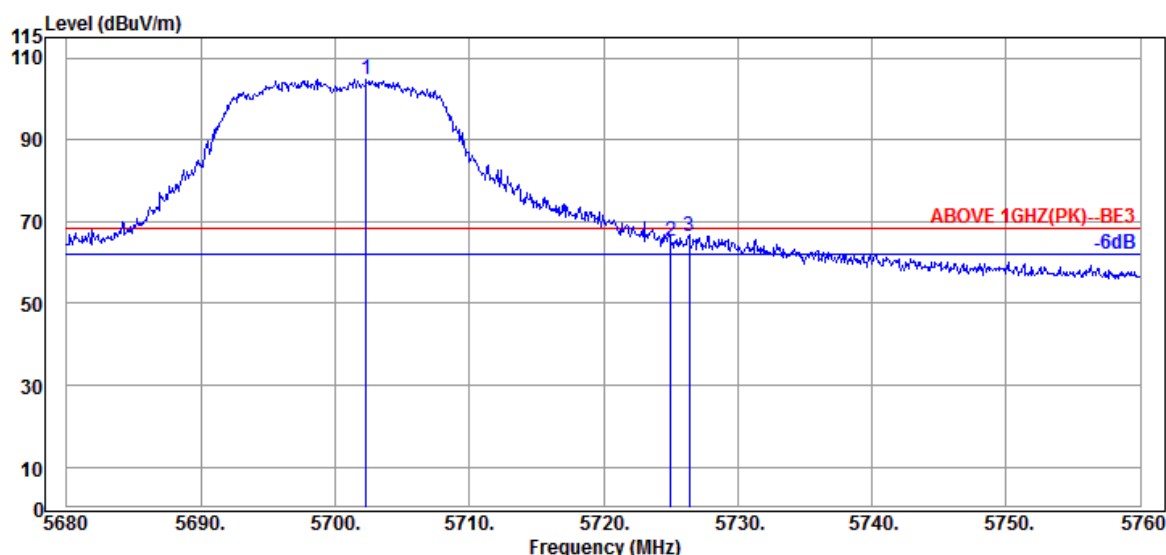

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5702.320               | 34.40                 | 11.03           | 34.31            | 93.77             | 104.89                  | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32            | 53.77             | 65.17                   | 68.20           | 3.03        | Peak     |
| 5726.400                 | 34.67                 | 11.05           | 34.32            | 55.07             | 66.47                   | 68.20           | 1.73        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5720MHz |

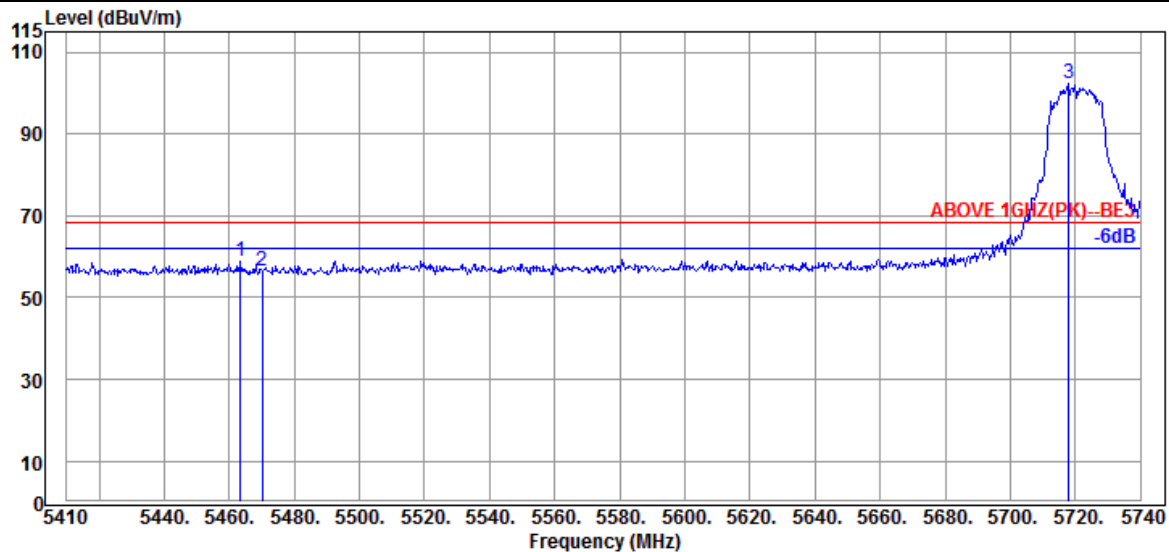

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5463.460                 | 34.50                 | 10.91           | 34.24            | 47.59             | 58.76                   | 68.20           | 9.44        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 45.43             | 56.57                   | 68.20           | 11.63       | Peak     |
| @ 5717.890               | 34.53                 | 11.05           | 34.32            | 90.96             | 102.22                  | ---             | ---         | Peak     |

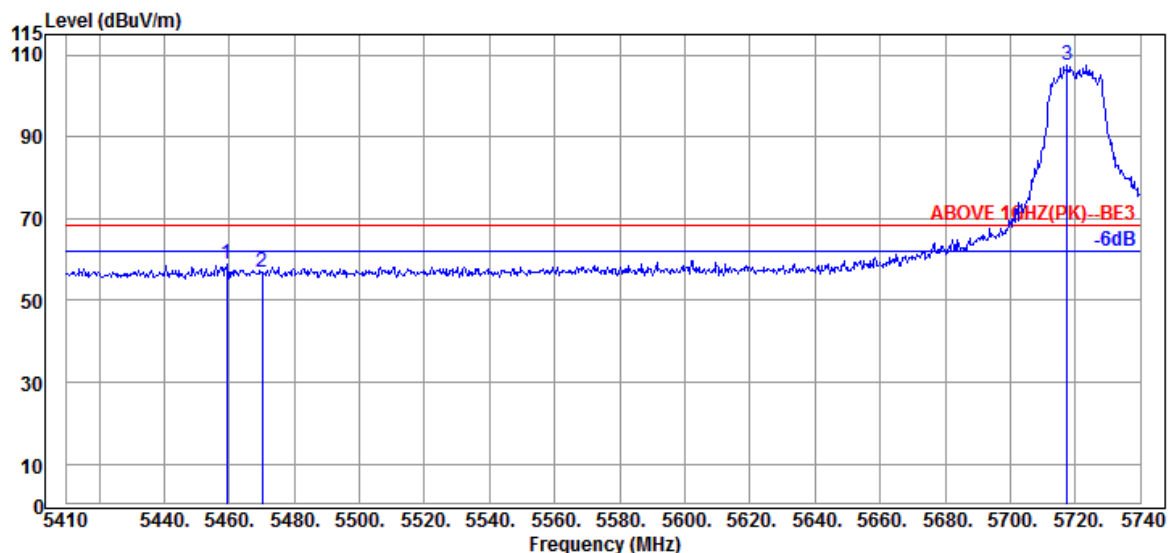

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.170                 | 34.50                 | 10.89           | 34.24            | 47.71             | 58.86                   | 68.20           | 9.34        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 45.75             | 56.89                   | 68.20           | 11.31       | Peak     |
| @ 5717.560               | 34.53                 | 11.05           | 34.32            | 96.38             | 107.64                  | ---             | ---         | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5720MHz |

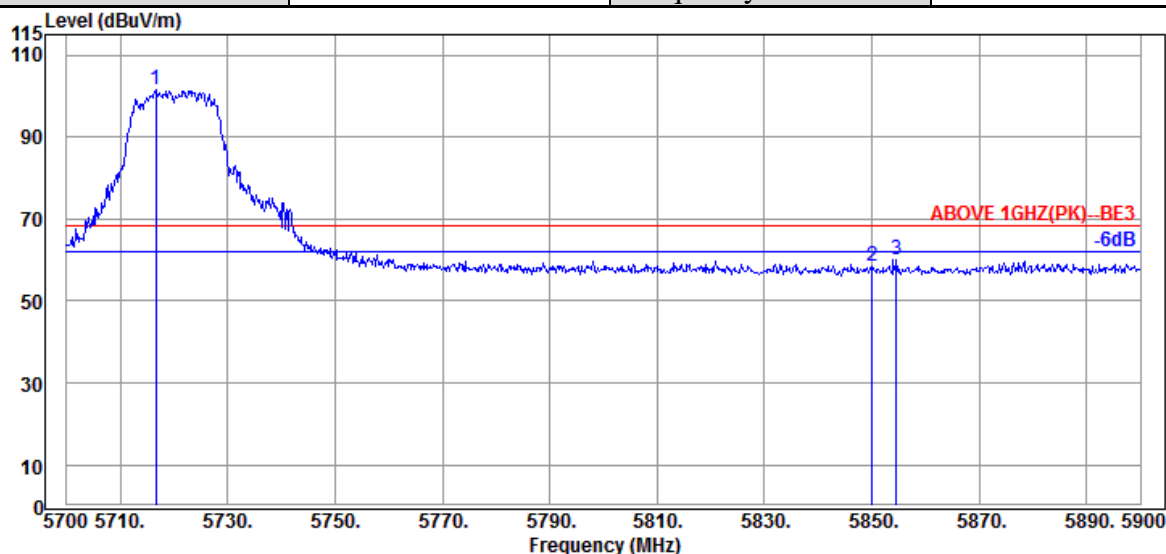

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5716.600               | 34.53                 | 11.05           | 34.32            | 90.18             | 101.44                  | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38            | 46.78             | 58.60                   | 68.20           | 9.60        | Peak     |
| 5854.600                 | 35.10                 | 11.10           | 34.38            | 48.11             | 59.93                   | 68.20           | 8.27        | Peak     |

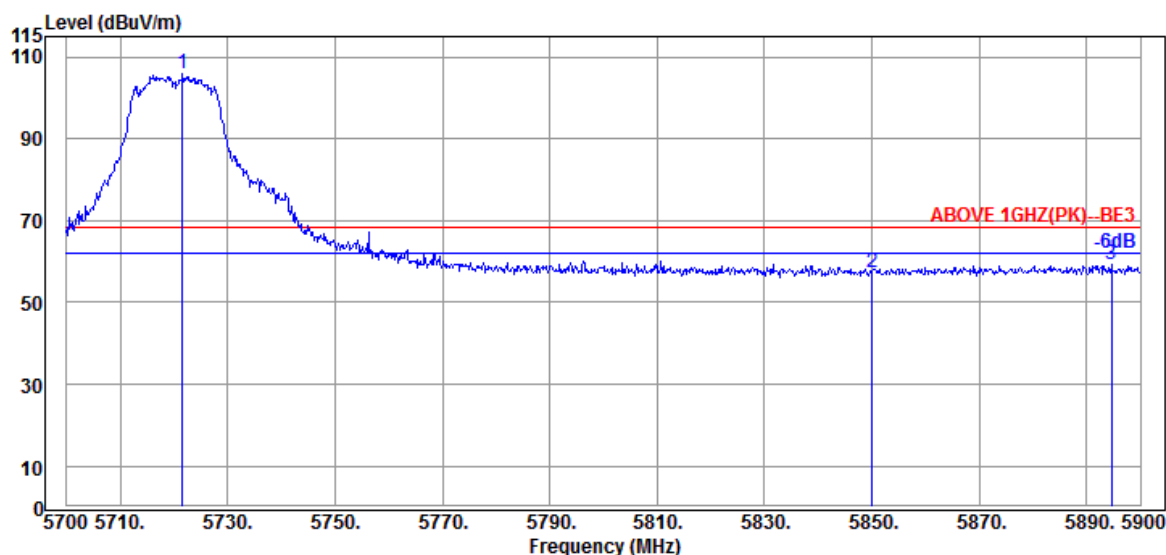

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5721.600               | 34.53                 | 11.05           | 34.32            | 94.56             | 105.82                  | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38            | 45.64             | 57.46                   | 68.20           | 10.74       | Peak     |
| 5894.600                 | 35.40                 | 11.12           | 34.40            | 47.10             | 59.22                   | 68.20           | 8.98        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | III        |
|      |         | Frequency  | TX 5745MHz |

#### Antenna at Horizontal Polarization

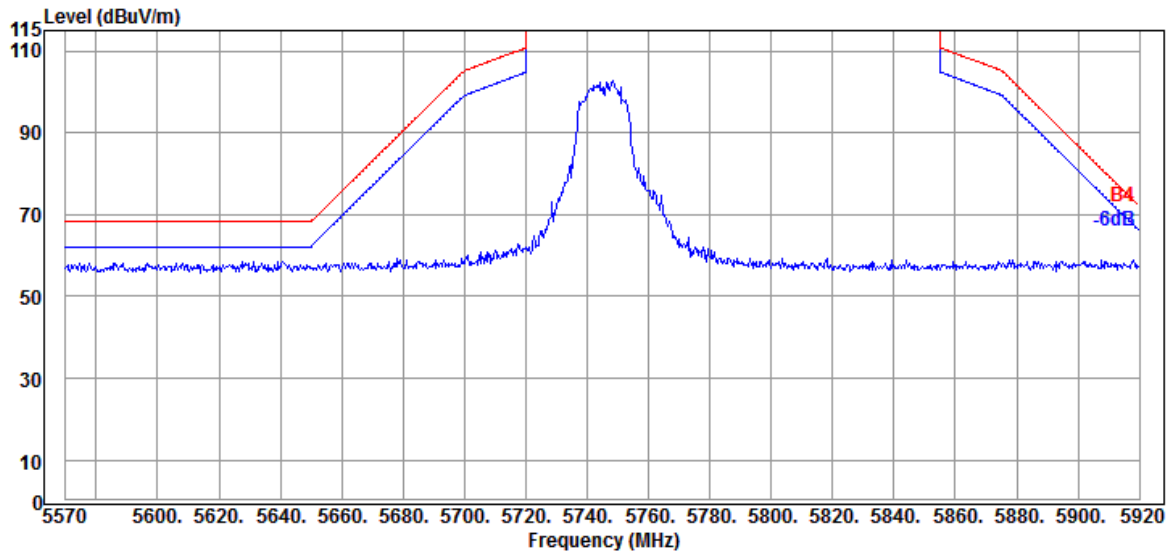

#### Antenna at Vertical Polarization

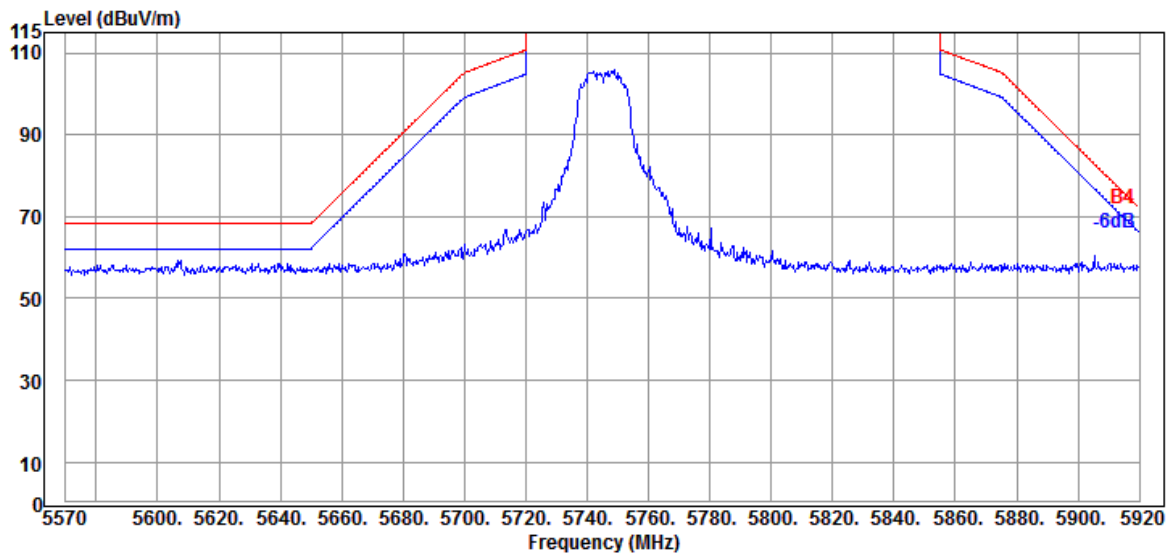


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | III        |
|      |         | Frequency  | TX 5825MHz |


#### Antenna at Horizontal Polarization

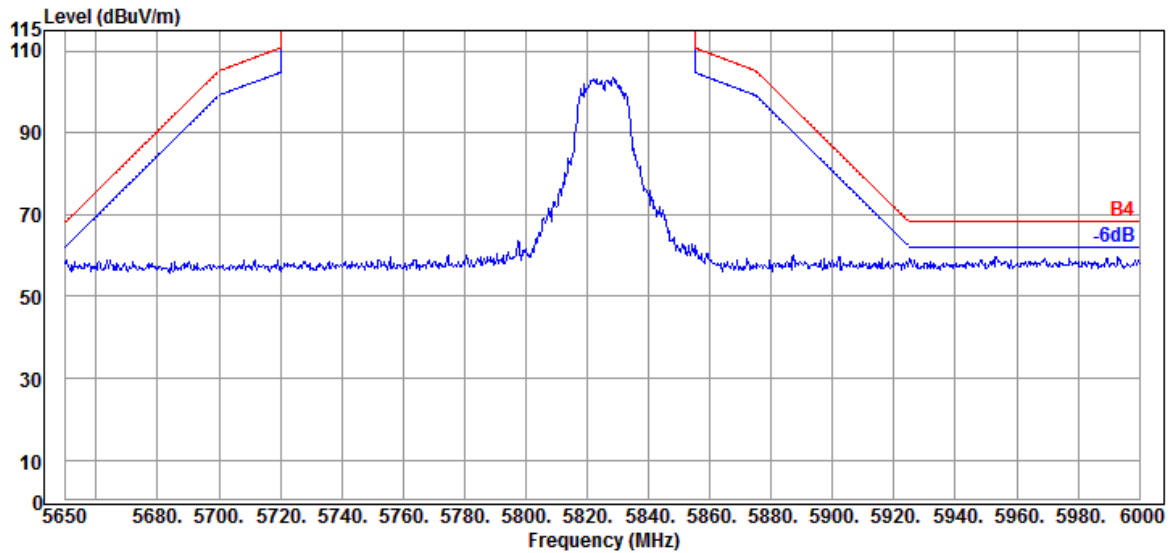

#### Antenna at Vertical Polarization

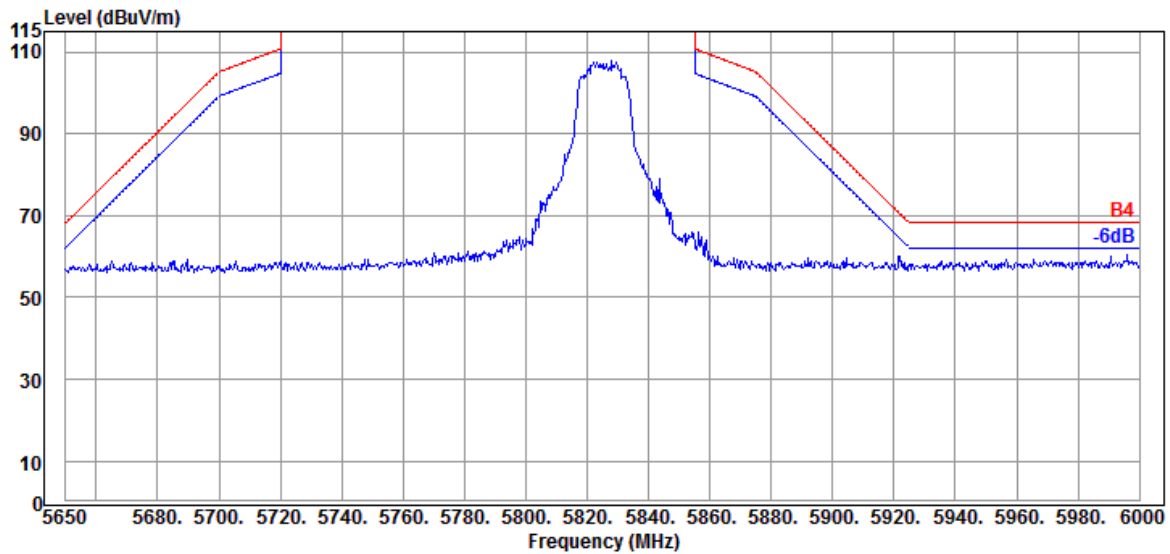


|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | I          |
|      |              | Frequency  | TX 5180MHz |

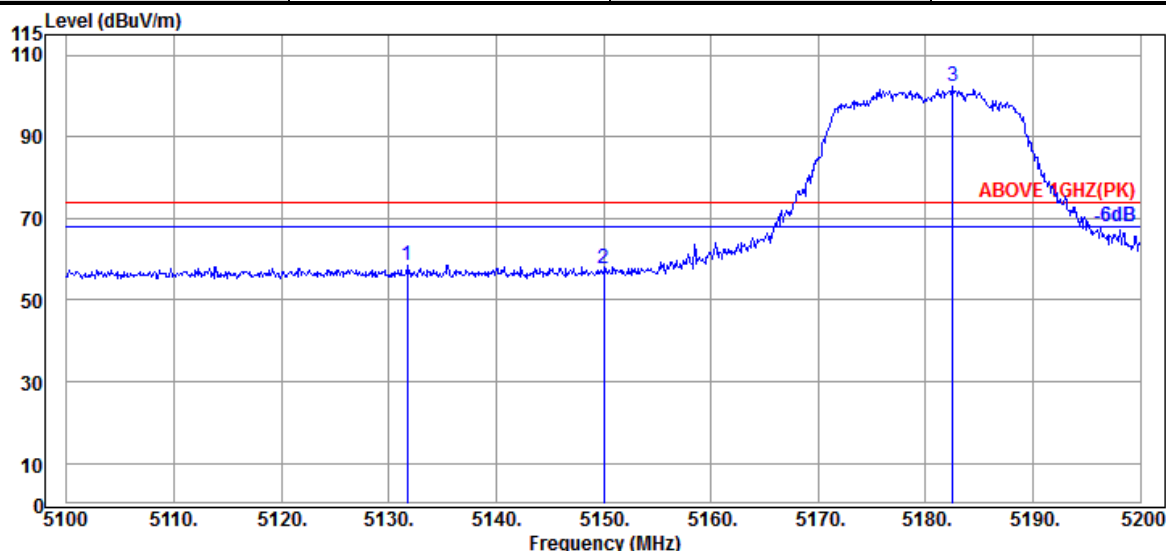

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5131.700                 | 34.17                 | 10.70           | 34.36                  | 48.11             | 58.62                   | 74.00           | 15.38       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 47.16             | 57.71                   | 74.00           | 16.29       | Peak     |
| @ 5182.500               | 34.20                 | 10.72           | 34.34                  | 91.79             | 102.37                  | ---             | ---         | Peak     |

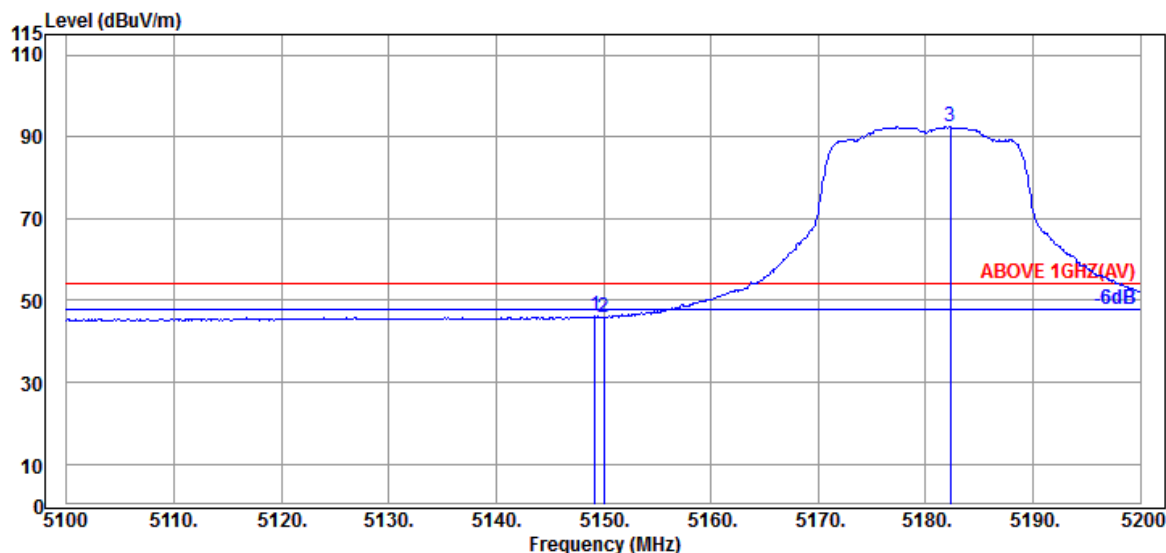

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.200                 | 34.20                 | 10.70           | 34.35                  | 35.58             | 46.13                   | 54.00           | 7.87        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 35.40             | 45.95                   | 54.00           | 8.05        | Average  |
| @ 5182.300               | 34.20                 | 10.72           | 34.34                  | 81.81             | 92.39                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

| Mode | 802.11n-HT20 | U-NII Band | I          |
|------|--------------|------------|------------|
|      |              | Frequency  | TX 5180MHz |

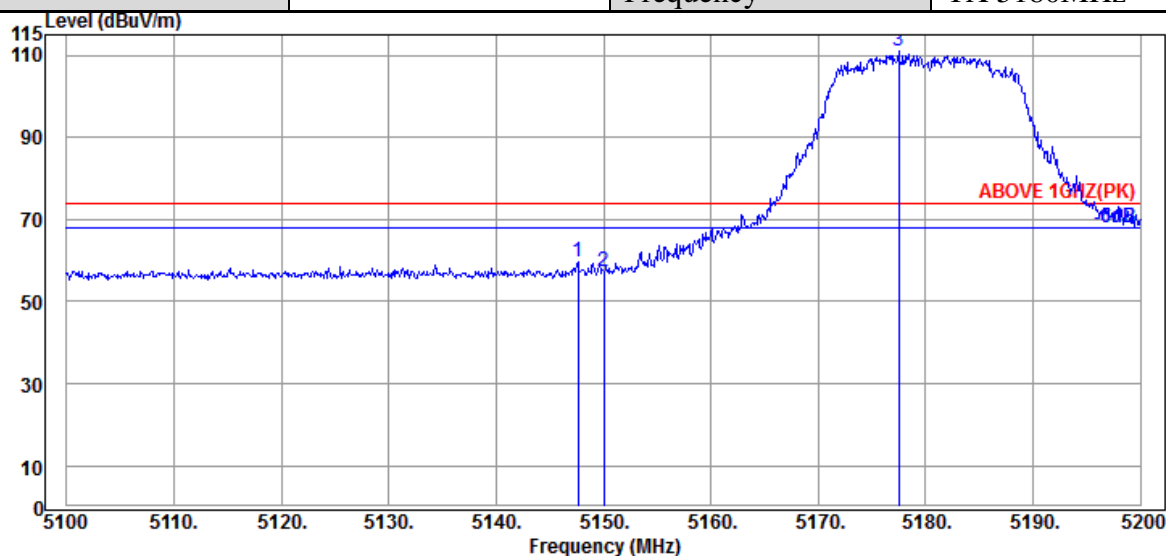

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.600                 | 34.20                 | 10.70           | 34.35                  | 48.97             | 59.52                   | 74.00           | 14.48       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 46.88             | 57.43                   | 74.00           | 16.57       | Peak     |
| @ 5177.500               | 34.20                 | 10.72           | 34.34                  | 100.56            | 111.14                  | ---             | ---         | Peak     |

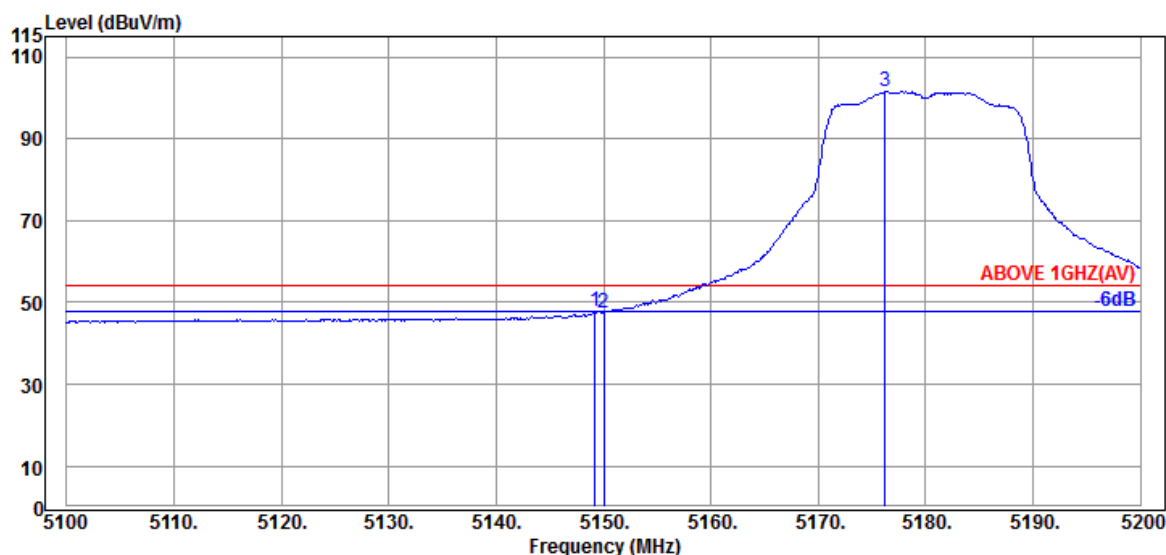


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.200                 | 34.20                 | 10.70           | 34.35                  | 37.18             | 47.73                   | 54.00           | 6.27        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 37.06             | 47.61                   | 54.00           | 6.39        | Average  |
| @ 5176.200               | 34.20                 | 10.72           | 34.34                  | 90.99             | 101.57                  | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5320MHz |

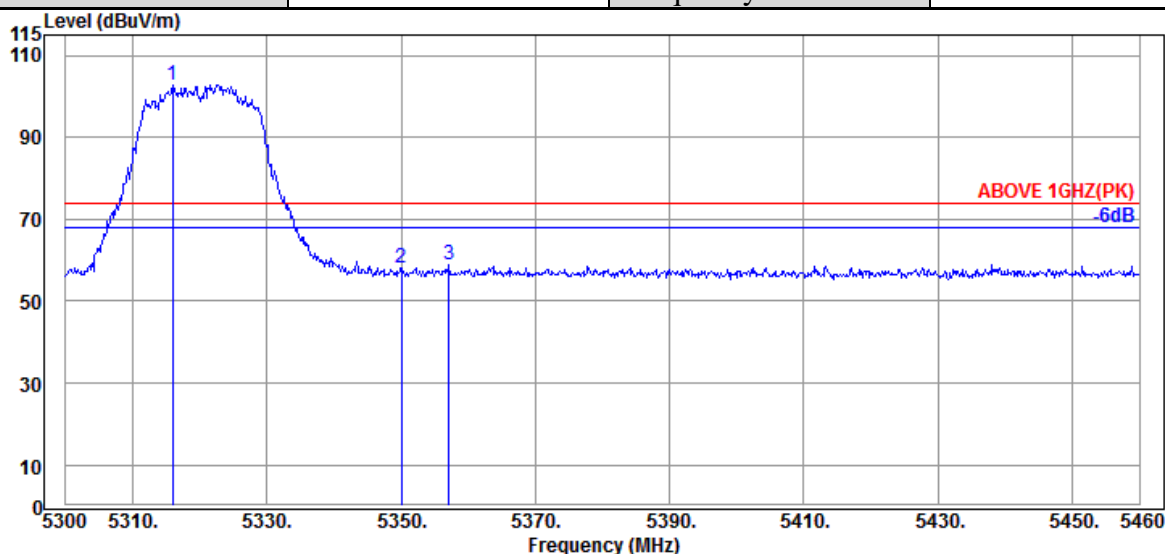

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.000               | 34.53                 | 10.81           | 34.29                  | 91.81             | 102.86                  | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 46.80             | 57.96                   | 74.00           | 16.04       | Peak     |
| 5357.120                 | 34.63                 | 10.85           | 34.27                  | 47.56             | 58.77                   | 74.00           | 15.23       | Peak     |

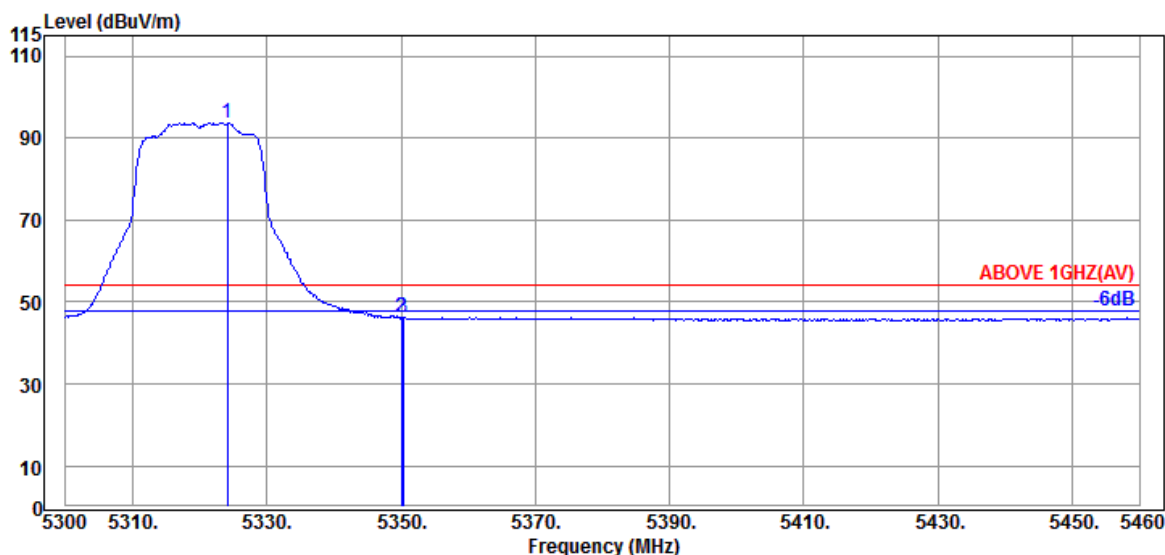


## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5324.160               | 34.57                 | 10.83           | 34.28                  | 82.70             | 93.82                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 34.89             | 46.05                   | 54.00           | 7.95        | Average  |
| 5350.240                 | 34.60                 | 10.83           | 34.27                  | 35.04             | 46.20                   | 54.00           | 7.80        | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5320MHz |

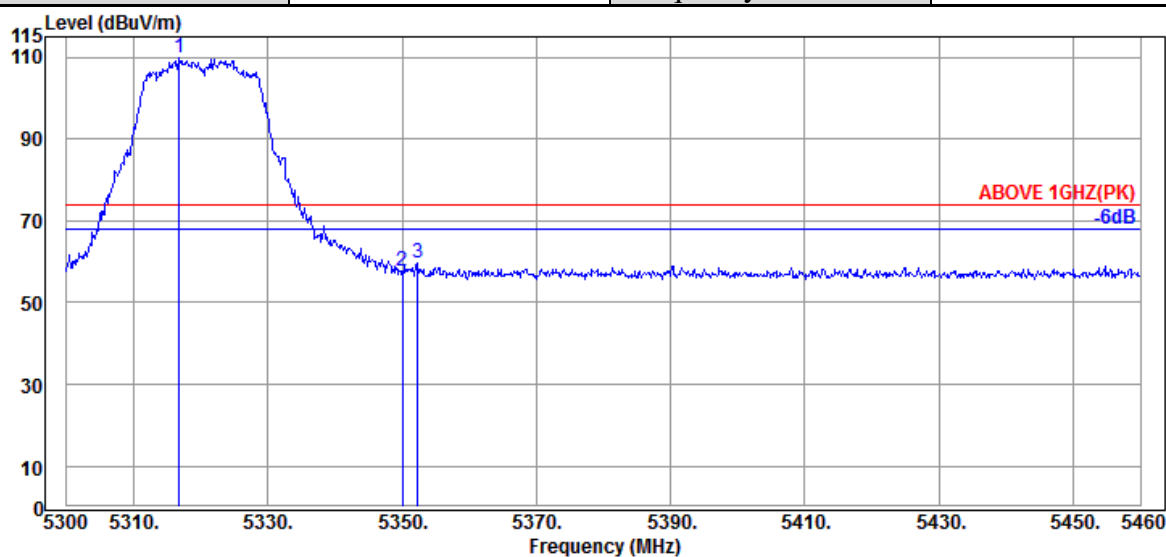

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.800               | 34.53                 | 10.81           | 34.29            | 98.99             | 110.04                  | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27            | 46.56             | 57.72                   | 74.00           | 16.28       | Peak     |
| 5352.320                 | 34.60                 | 10.83           | 34.27            | 48.67             | 59.83                   | 74.00           | 14.17       | Peak     |

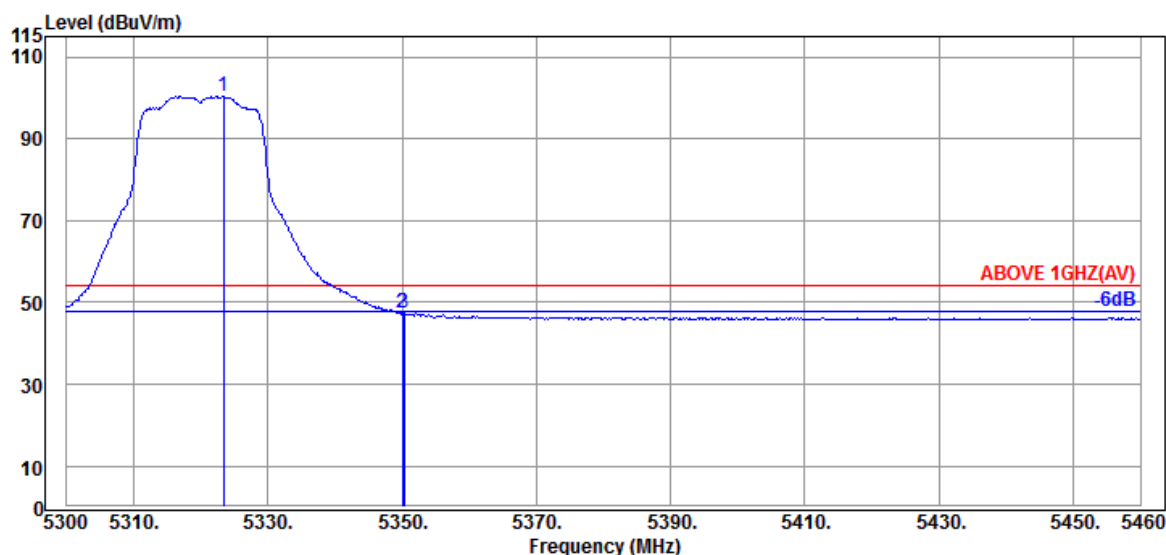

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5323.360               | 34.57                 | 10.83           | 34.28            | 89.45             | 100.57                  | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27            | 36.15             | 47.31                   | 54.00           | 6.69        | Average  |
| 5350.240                 | 34.60                 | 10.83           | 34.27            | 36.16             | 47.32                   | 54.00           | 6.68        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5500MHz |

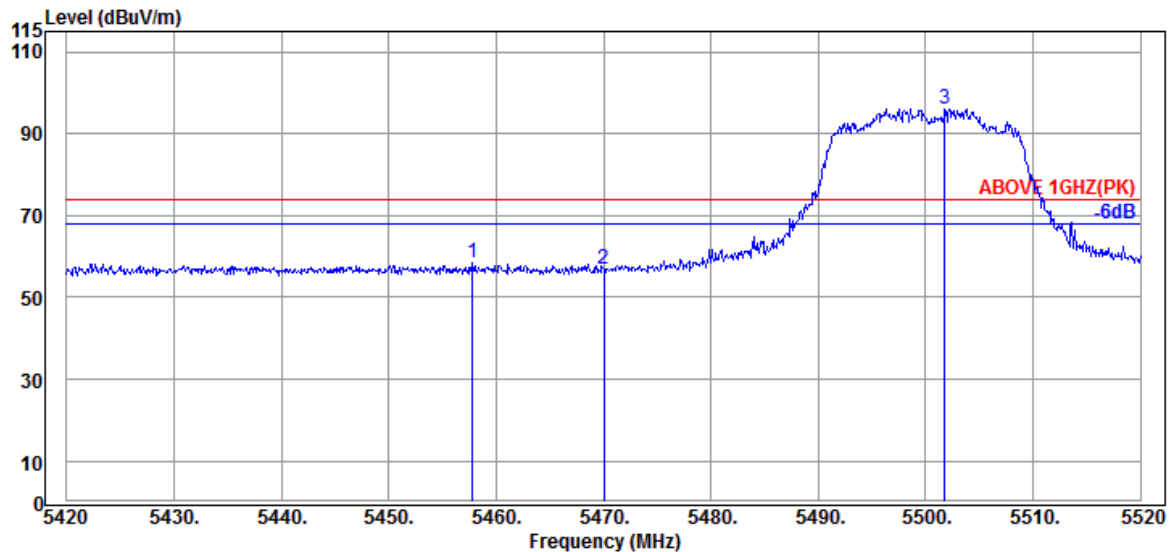

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.800                 | 34.50                 | 10.89           | 34.24                  | 47.52             | 58.67                   | 74.00           | 15.33       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 45.74             | 56.88                   | 74.00           | 17.12       | Peak     |
| @ 5501.800               | 34.40                 | 10.93           | 34.24                  | 85.06             | 96.15                   | ---             | ---         | Peak     |

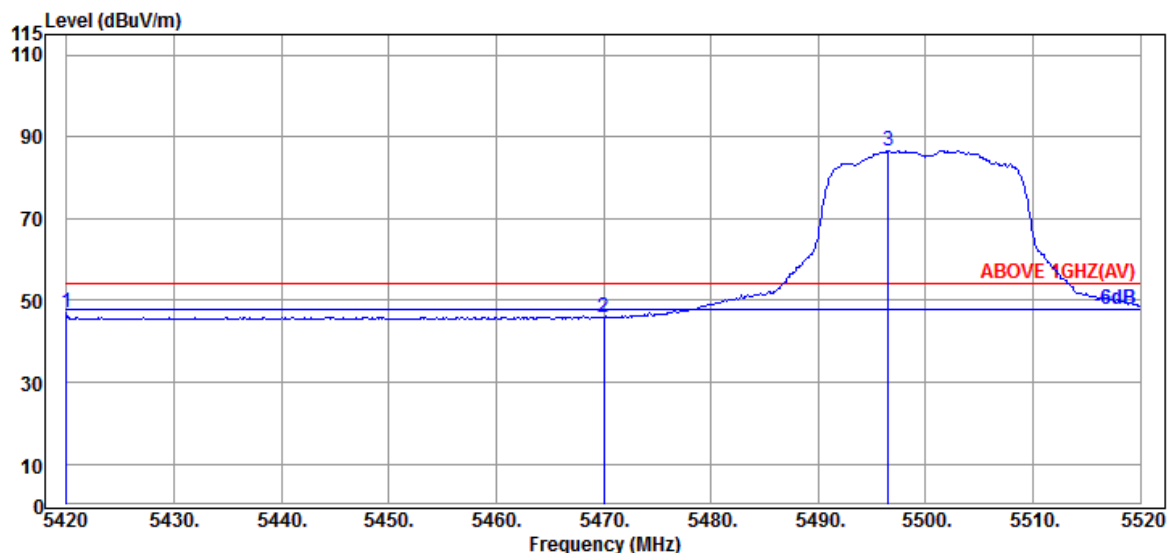

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5420.000                 | 34.60                 | 10.87           | 34.26                  | 35.94             | 47.15                   | 54.00           | 6.85        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 34.56             | 45.70                   | 54.00           | 8.30        | Average  |
| @ 5496.500               | 34.40                 | 10.93           | 34.23                  | 75.54             | 86.64                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|------|--------------|------------|------------|
|      |              | Frequency  | TX 5500MHz |

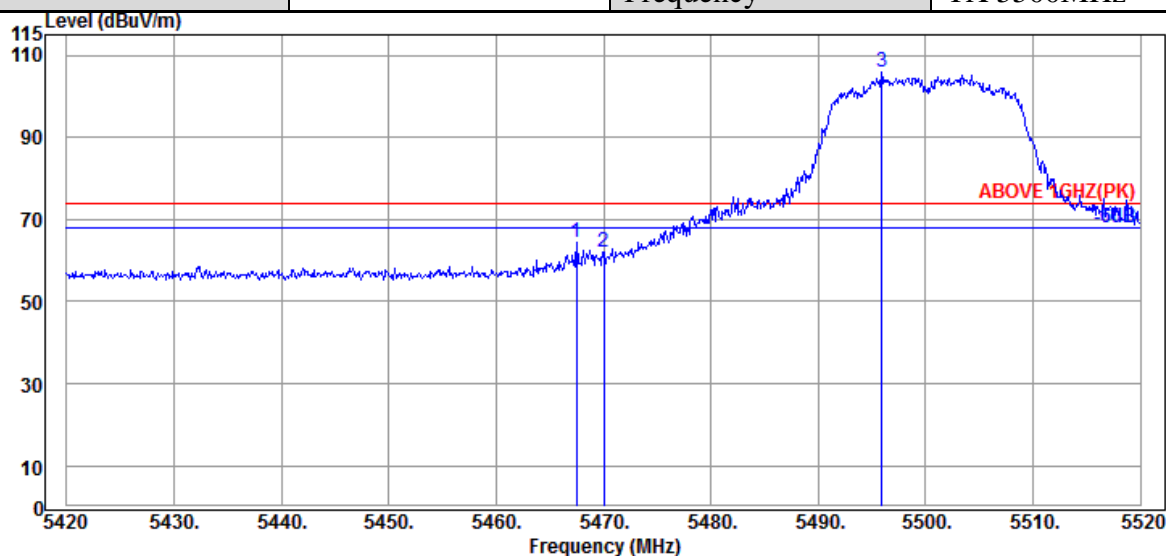

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.500                 | 34.47                 | 10.91           | 34.24                  | 53.46             | 64.60                   | 74.00           | 9.40        | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 51.08             | 62.22                   | 74.00           | 11.78       | Peak     |
| @ 5495.900               | 34.40                 | 10.93           | 34.23                  | 94.76             | 105.86                  | ---             | ---         | Peak     |

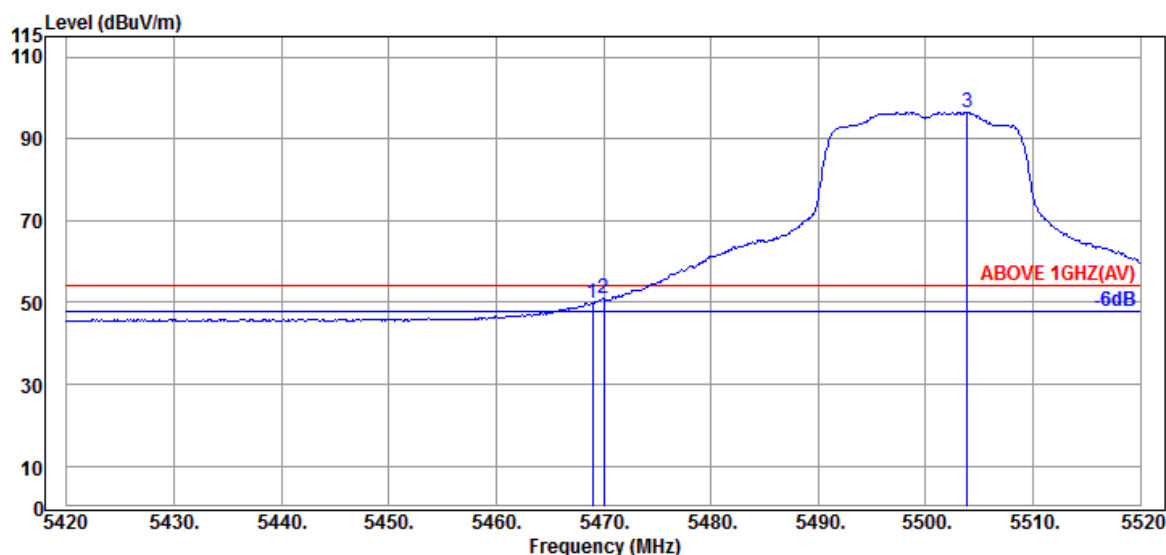

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.000                 | 34.47                 | 10.91           | 34.24                  | 38.61             | 49.75                   | 54.00           | 4.25        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 39.80             | 50.94                   | 54.00           | 3.06        | Average  |
| @ 5503.900               | 34.40                 | 10.93           | 34.24                  | 85.32             | 96.41                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5700MHz |

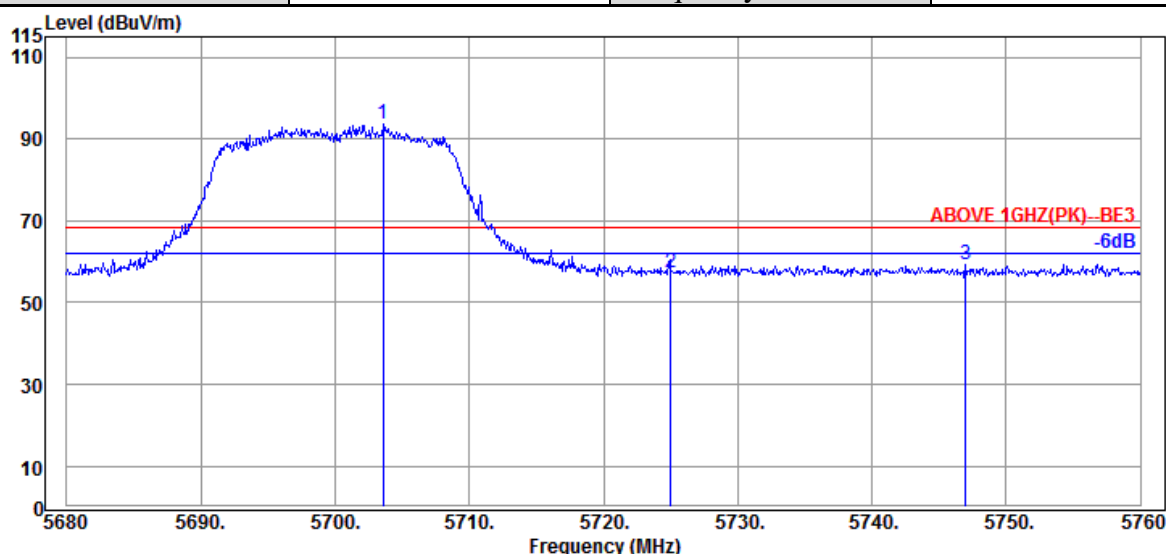

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5703.600                 | 34.40                 | 11.03           | 34.31                  | 82.41             | 93.53                   | ---             | ---         | Peak     |
|   | 5725.040                 | 34.67                 | 11.05           | 34.32                  | 45.86             | 57.26                   | 68.20           | 10.94       | Peak     |
|   | 5746.960                 | 34.80                 | 11.06           | 34.33                  | 47.88             | 59.41                   | 68.20           | 8.79        | Peak     |

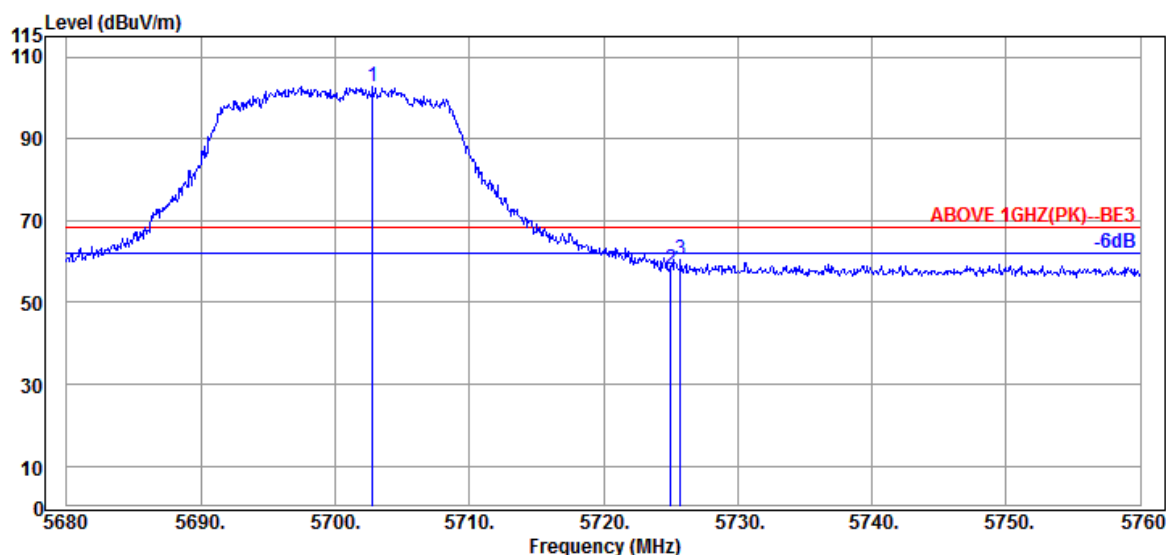


## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5702.800                 | 34.40                 | 11.03           | 34.31                  | 91.60             | 102.72                  | ---             | ---         | Peak     |
|   | 5725.040                 | 34.67                 | 11.05           | 34.32                  | 46.77             | 58.17                   | 68.20           | 10.03       | Peak     |
|   | 5725.760                 | 34.67                 | 11.05           | 34.32                  | 48.99             | 60.39                   | 68.20           | 7.81        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5720MHz |

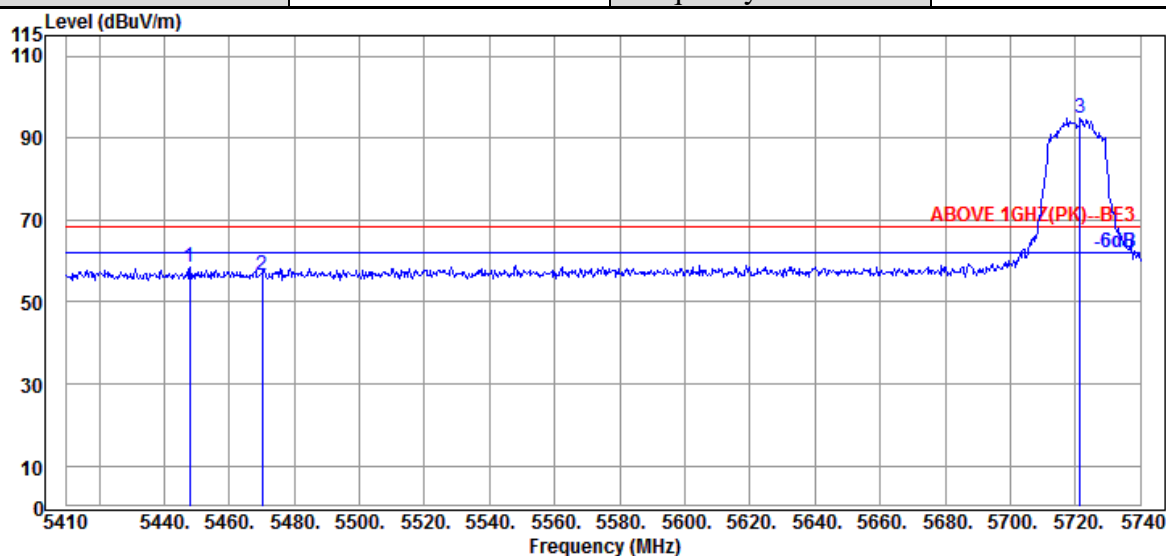

### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5447.950                 | 34.50                 | 10.89           | 34.25            | 47.24             | 58.38                   | 68.20           | 9.82        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 45.46             | 56.60                   | 68.20           | 11.60       | Peak     |
| @ 5721.520               | 34.53                 | 11.05           | 34.32            | 83.67             | 94.93                   | ---             | ---         | Peak     |

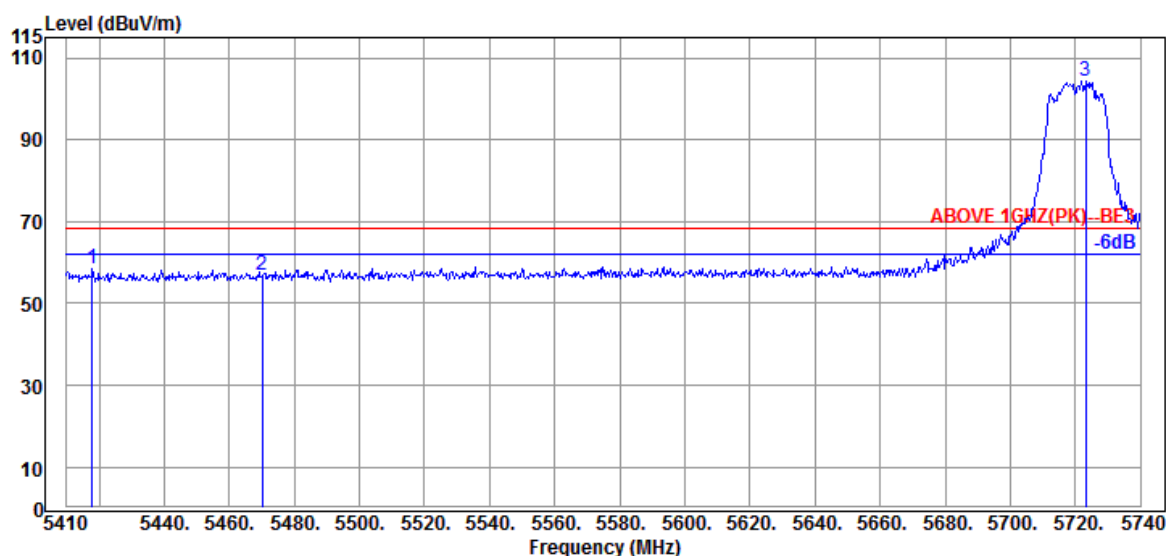

### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5417.920                 | 34.60                 | 10.87           | 34.26            | 47.17             | 58.38                   | 68.20           | 9.82        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 45.64             | 56.78                   | 68.20           | 11.42       | Peak     |
| @ 5723.170               | 34.67                 | 11.05           | 34.32            | 92.82             | 104.22                  | ---             | ---         | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5720MHz |

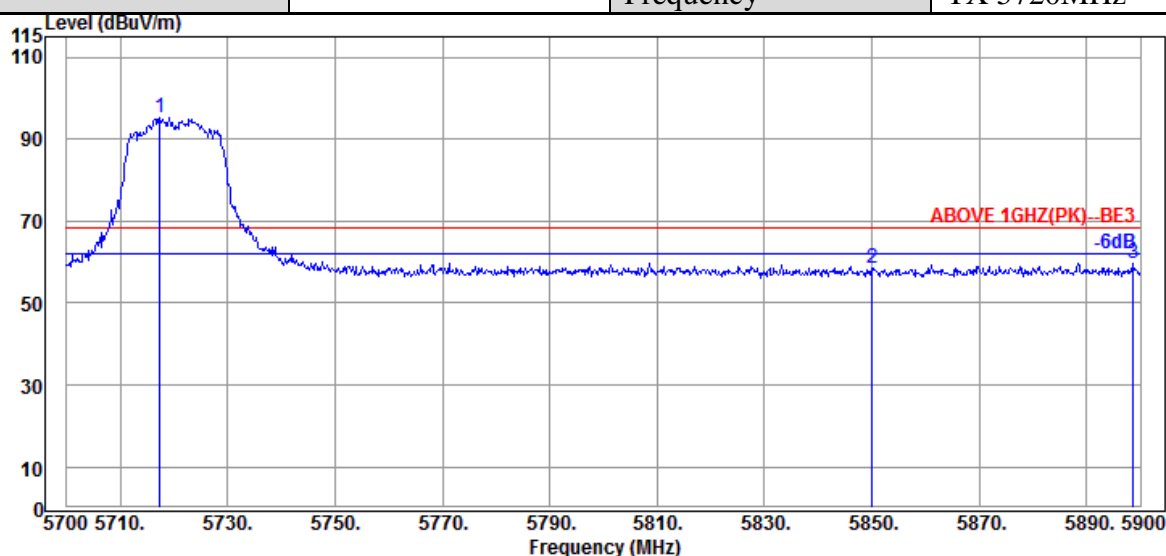

### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5717.400                 | 34.53                 | 11.05           | 34.32                  | 83.92             | 95.18                   | ---             | ---         | Peak     |
|   | 5850.000                 | 35.10                 | 11.10           | 34.38                  | 46.52             | 58.34                   | 68.20           | 9.86        | Peak     |
|   | 5898.600                 | 35.40                 | 11.14           | 34.40                  | 47.66             | 59.80                   | 68.20           | 8.40        | Peak     |

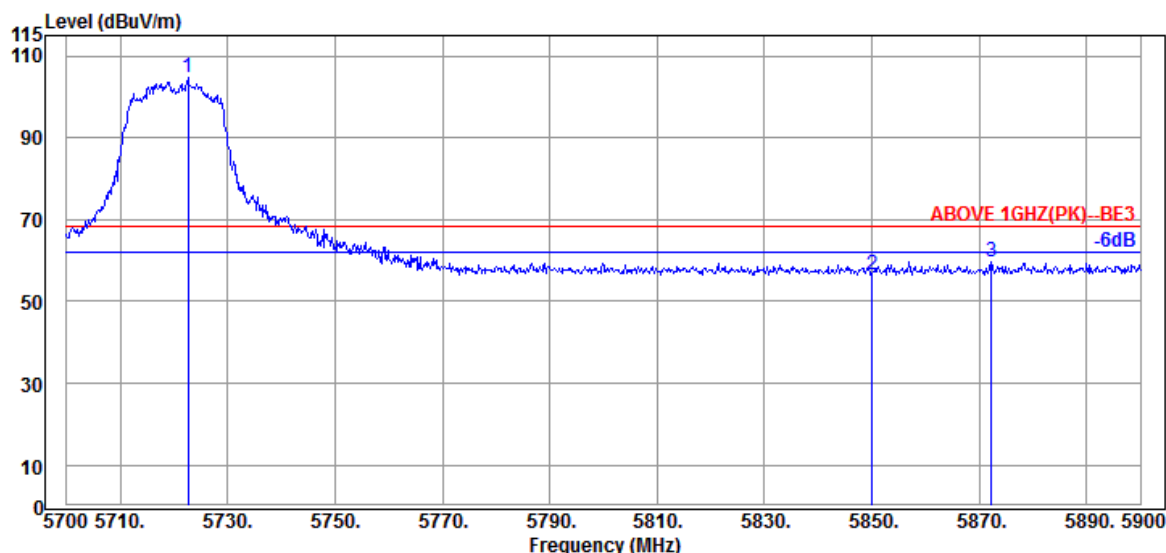

### Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5722.600                 | 34.67                 | 11.05           | 34.32                  | 93.31             | 104.71                  | ---             | ---         | Peak     |
|   | 5850.000                 | 35.10                 | 11.10           | 34.38                  | 44.52             | 56.34                   | 68.20           | 11.86       | Peak     |
|   | 5872.200                 | 35.20                 | 11.12           | 34.39                  | 47.55             | 59.48                   | 68.20           | 8.72        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | III        |
|      |              | Frequency  | TX 5745MHz |

#### Antenna at Horizontal Polarization

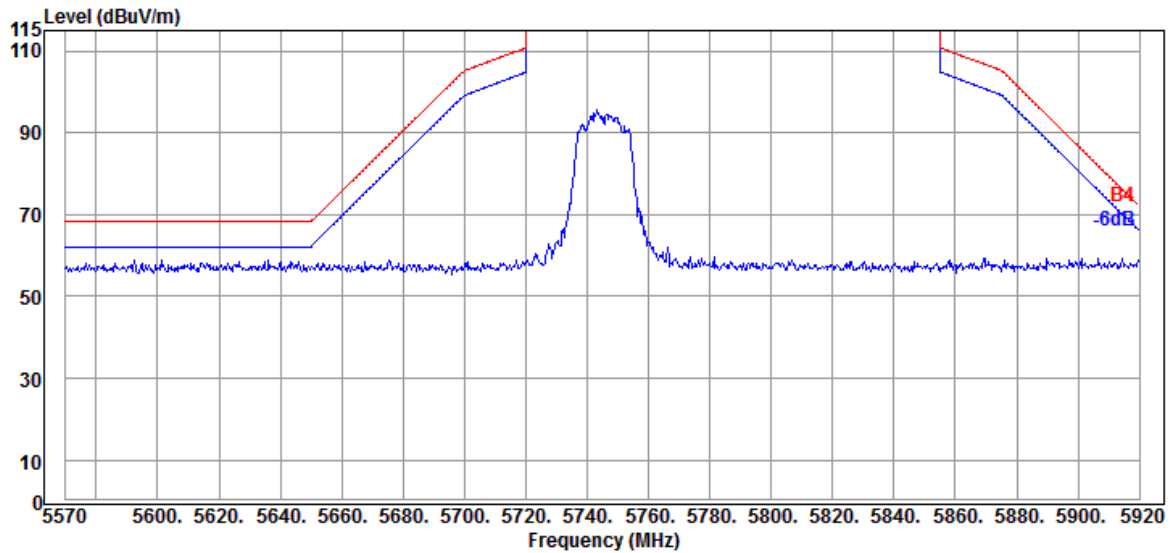

#### Antenna at Vertical Polarization

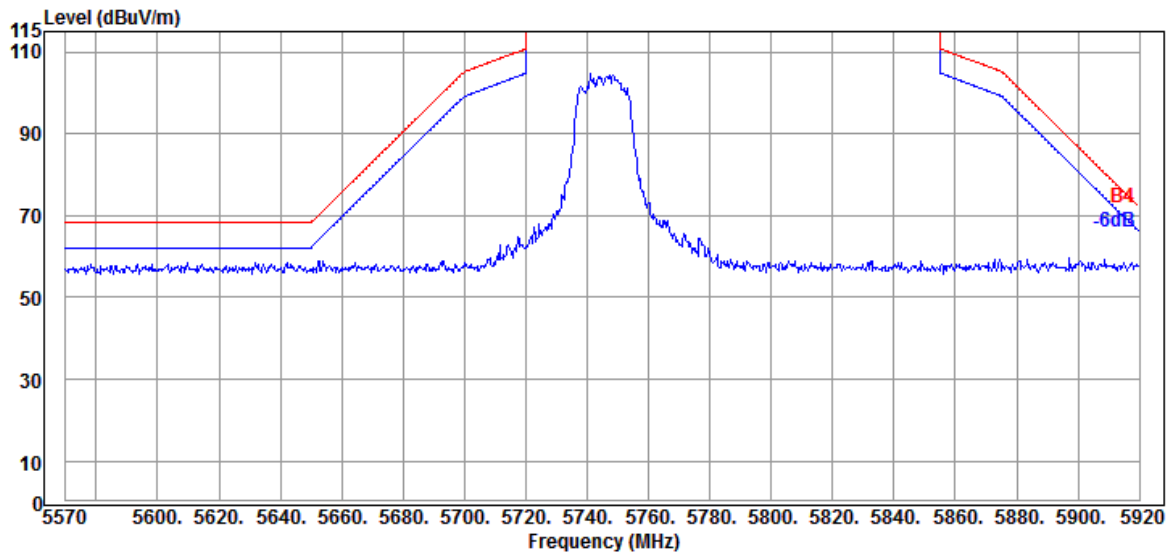


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | III        |
|      |              | Frequency  | TX 5825MHz |


#### Antenna at Horizontal Polarization

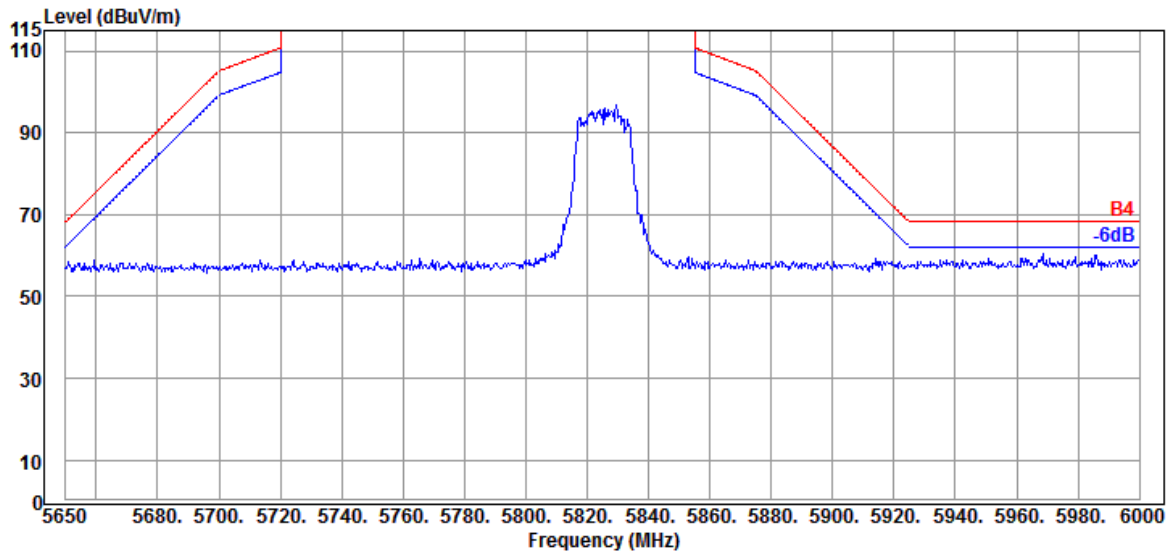

#### Antenna at Vertical Polarization

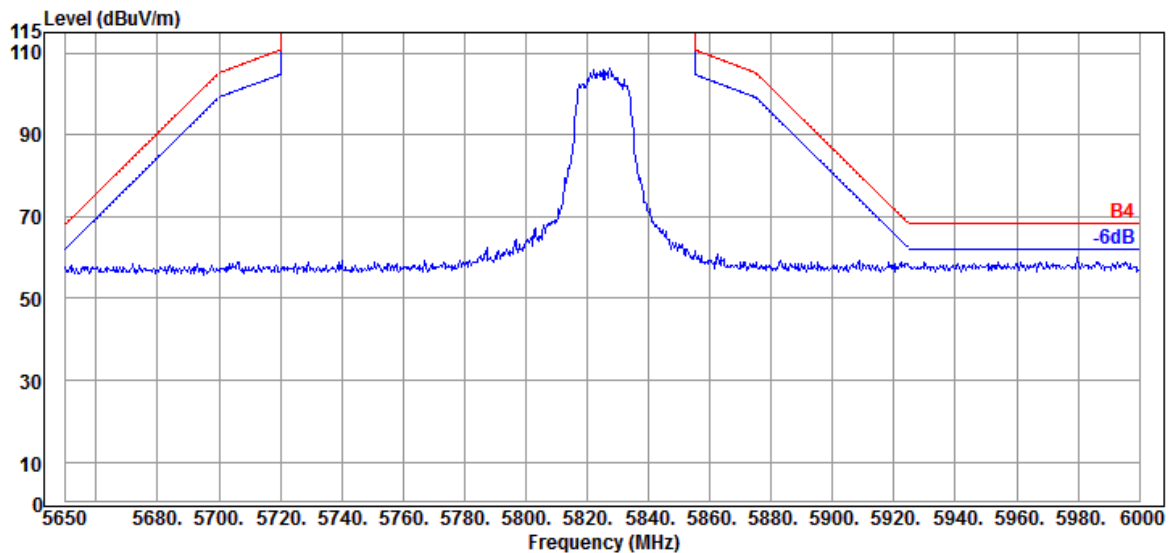


|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | I          |
|      |              | Frequency  | TX 5190MHz |

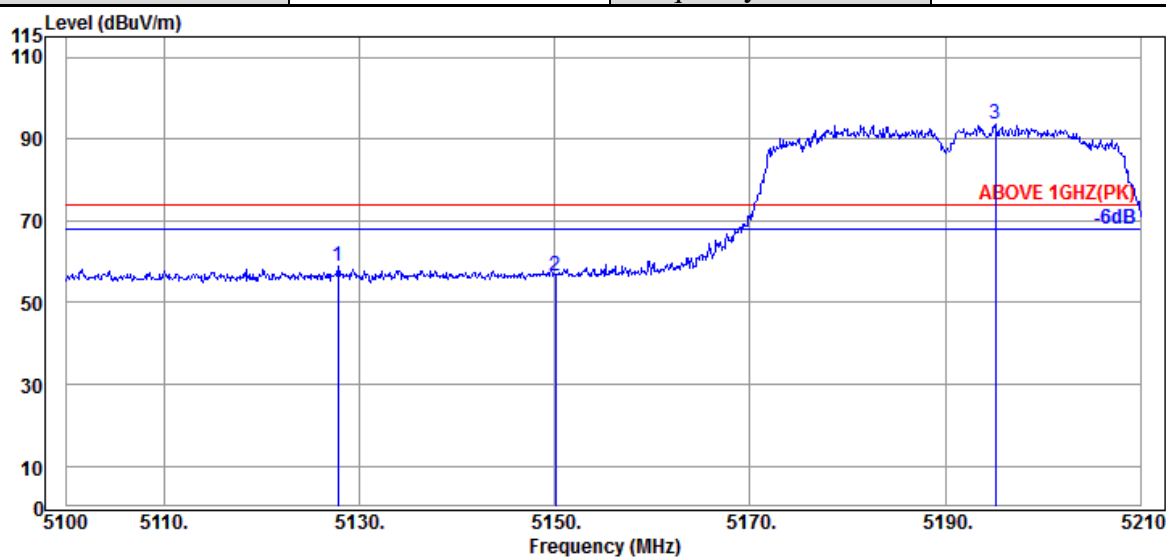

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5127.830                 | 34.17                 | 10.70           | 34.36            | 48.31             | 58.82                   | 74.00           | 15.18       | Peak     |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 46.09             | 56.64                   | 74.00           | 17.36       | Peak     |
| @ 5195.150               | 34.20                 | 10.74           | 34.33            | 83.13             | 93.74                   | ---             | ---         | Peak     |

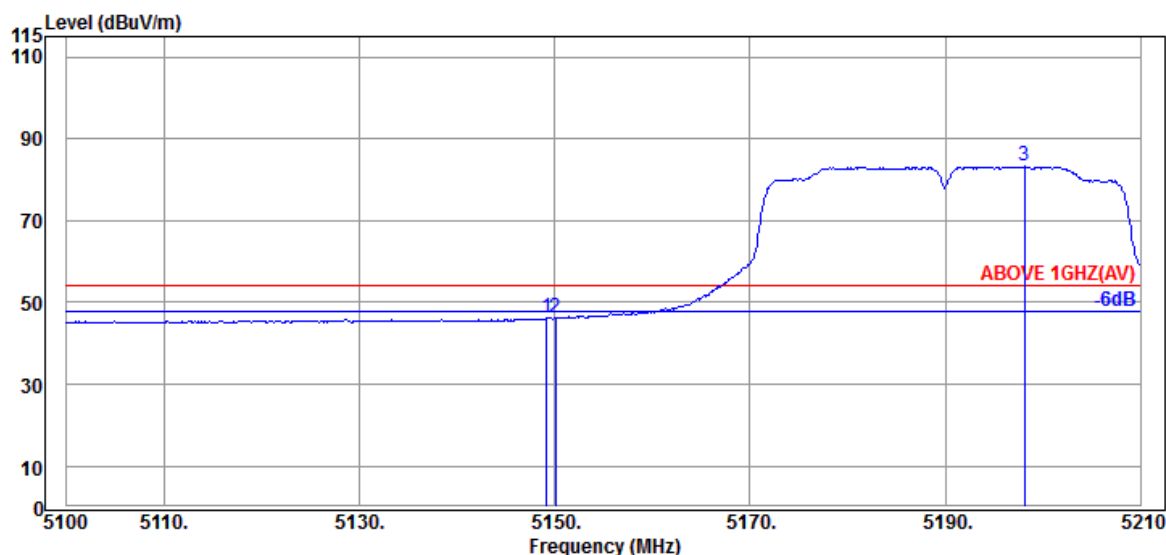

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.170                 | 34.20                 | 10.70           | 34.35            | 35.65             | 46.20                   | 54.00           | 7.80        | Average  |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 35.58             | 46.13                   | 54.00           | 7.87        | Average  |
| @ 5198.120               | 34.20                 | 10.74           | 34.33            | 72.59             | 83.20                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | I          |
|      |              | Frequency  | TX 5190MHz |

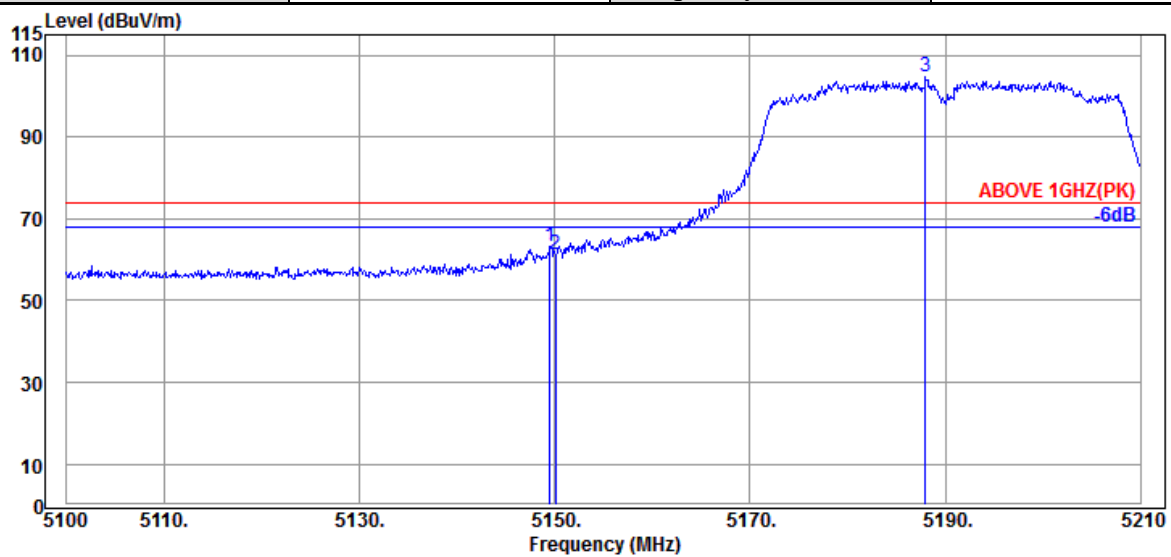

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.500                 | 34.20                 | 10.70           | 34.35                  | 52.72             | 63.27                   | 74.00           | 10.73       | Peak     |
| 5150.050                 | 34.20                 | 10.70           | 34.35                  | 50.78             | 61.33                   | 74.00           | 12.67       | Peak     |
| @ 5188.000               | 34.20                 | 10.74           | 34.34                  | 94.06             | 104.66                  | ---             | ---         | Peak     |

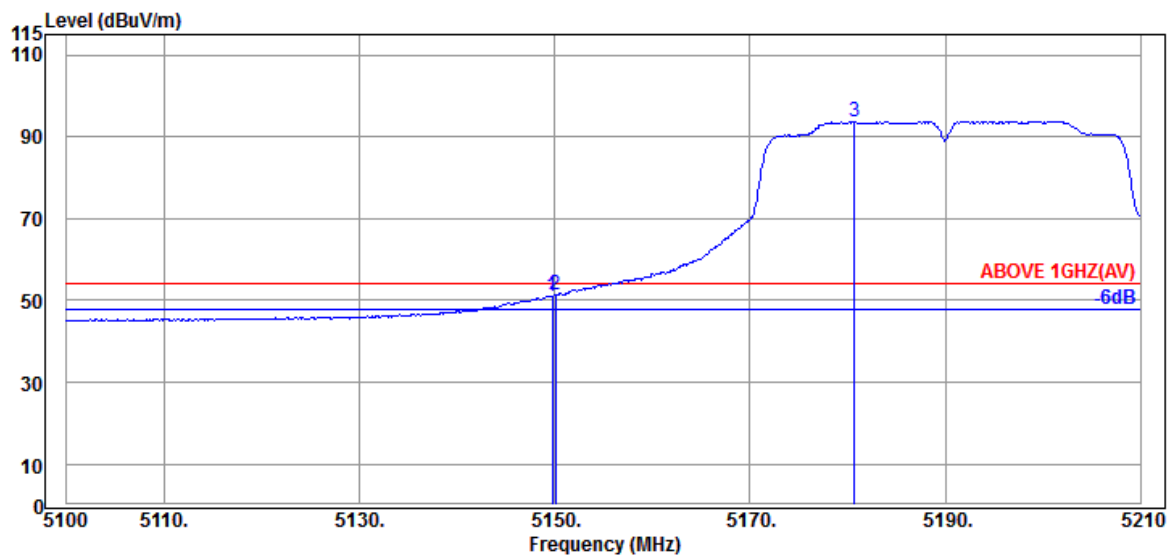

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720                 | 34.20                 | 10.70           | 34.35                  | 40.57             | 51.12                   | 54.00           | 2.88        | Average  |
| 5150.050                 | 34.20                 | 10.70           | 34.35                  | 40.73             | 51.28                   | 54.00           | 2.72        | Average  |
| @ 5180.740               | 34.20                 | 10.72           | 34.34                  | 83.21             | 93.79                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5310MHz |

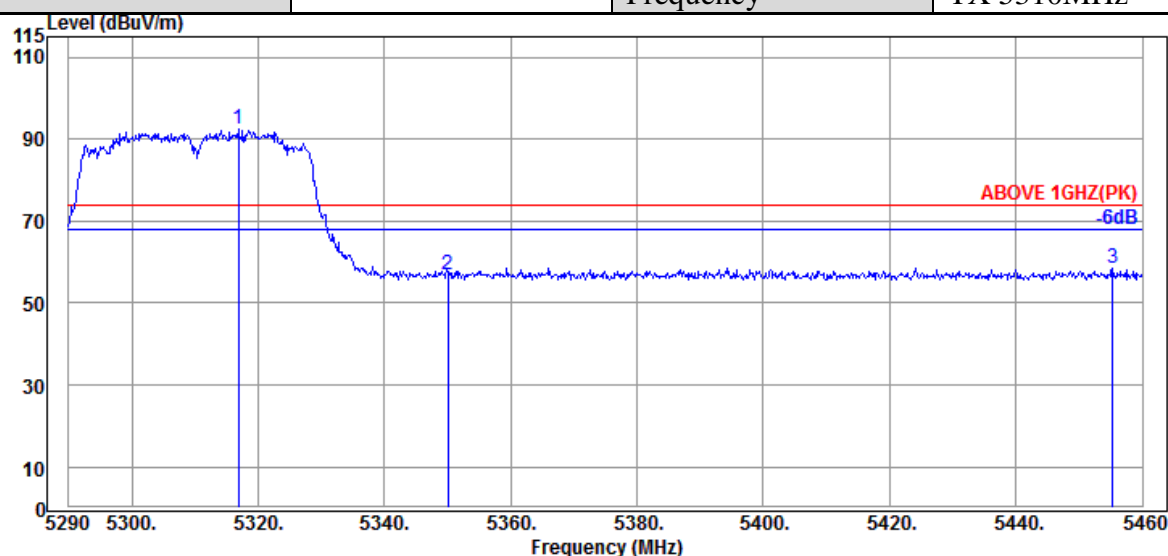

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5316.860                 | 34.53                 | 10.81           | 34.29                  | 81.24             | 92.29                   | ---             | ---         | Peak     |
|   | 5350.010                 | 34.60                 | 10.83           | 34.27                  | 45.82             | 56.98                   | 74.00           | 17.02       | Peak     |
|   | 5455.240                 | 34.50                 | 10.89           | 34.24                  | 47.52             | 58.67                   | 74.00           | 15.33       | Peak     |

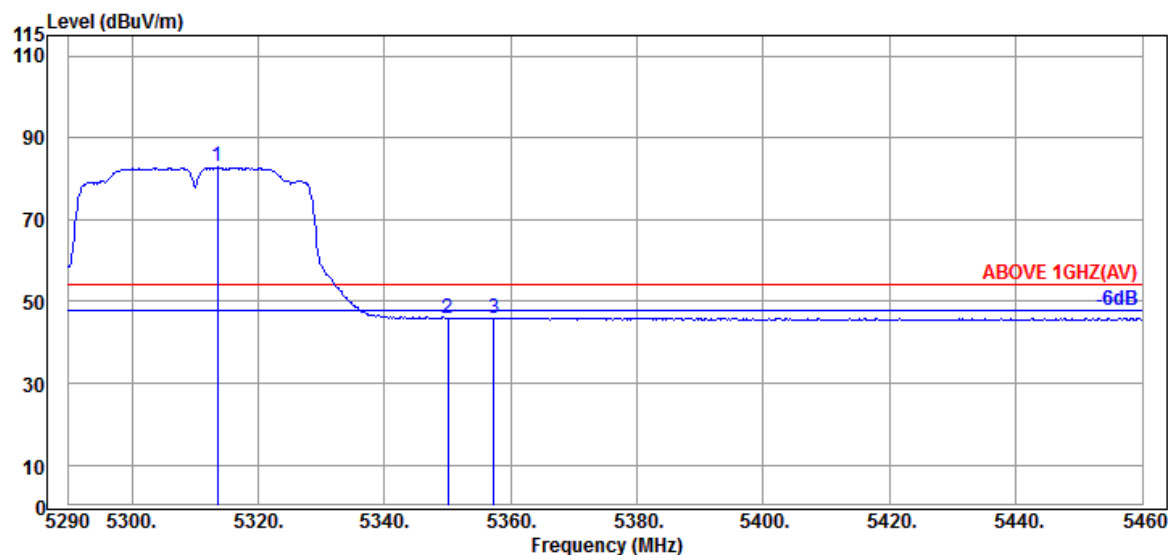

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5313.630                 | 34.53                 | 10.81           | 34.29                  | 71.76             | 82.81                   | ---             | ---         | Average  |
|   | 5350.010                 | 34.60                 | 10.83           | 34.27                  | 34.66             | 45.82                   | 54.00           | 8.18        | Average  |
|   | 5357.320                 | 34.63                 | 10.85           | 34.27                  | 34.76             | 45.97                   | 54.00           | 8.03        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5310MHz |

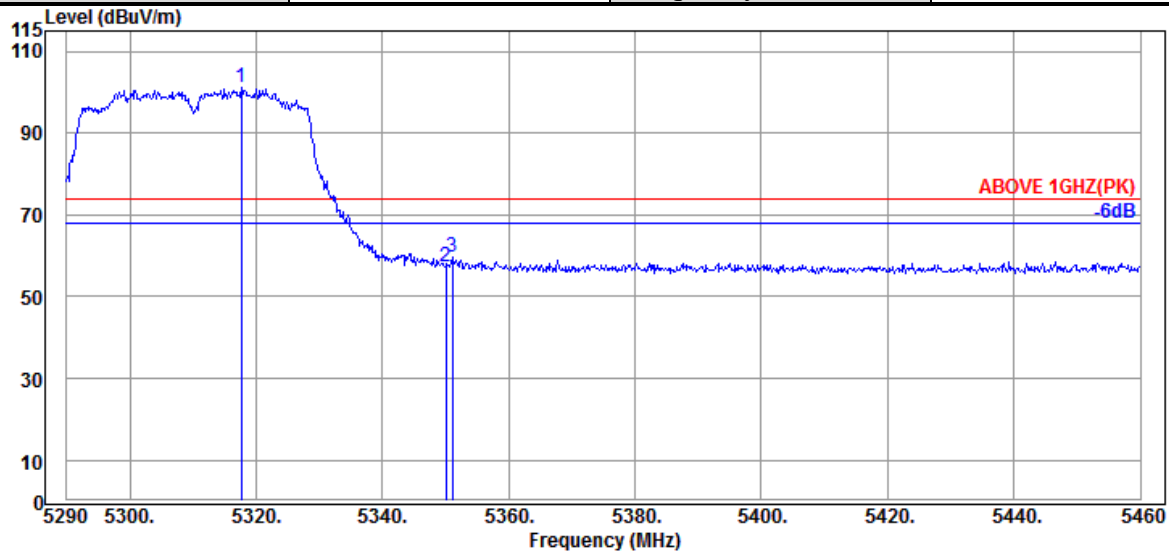

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5317.710                 | 34.53                 | 10.81           | 34.29                  | 89.94             | 100.99                  | ---             | ---         | Peak     |
|   | 5350.010                 | 34.60                 | 10.83           | 34.27                  | 46.30             | 57.46                   | 74.00           | 16.54       | Peak     |
|   | 5351.030                 | 34.60                 | 10.83           | 34.27                  | 48.69             | 59.85                   | 74.00           | 14.15       | Peak     |

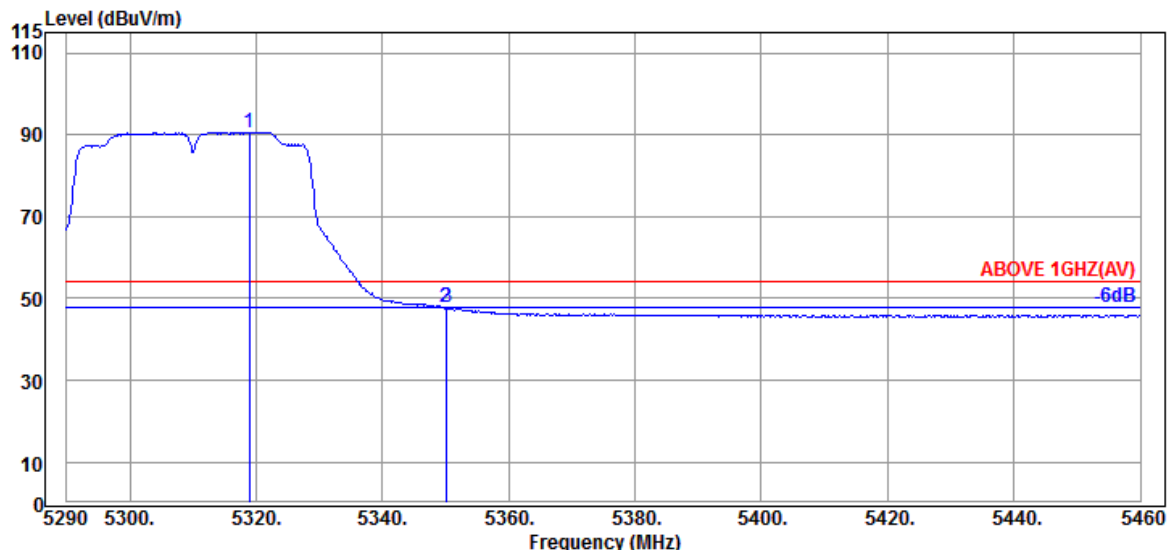

Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5318.900                 | 34.53                 | 10.81           | 34.29                  | 79.61             | 90.66                   | ---             | ---         | Average  |
|   | 5350.010                 | 34.60                 | 10.83           | 34.27                  | 36.56             | 47.72                   | 54.00           | 6.28        | Average  |
|   | 5350.180                 | 34.60                 | 10.83           | 34.27                  | 36.47             | 47.63                   | 54.00           | 6.37        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5510MHz |

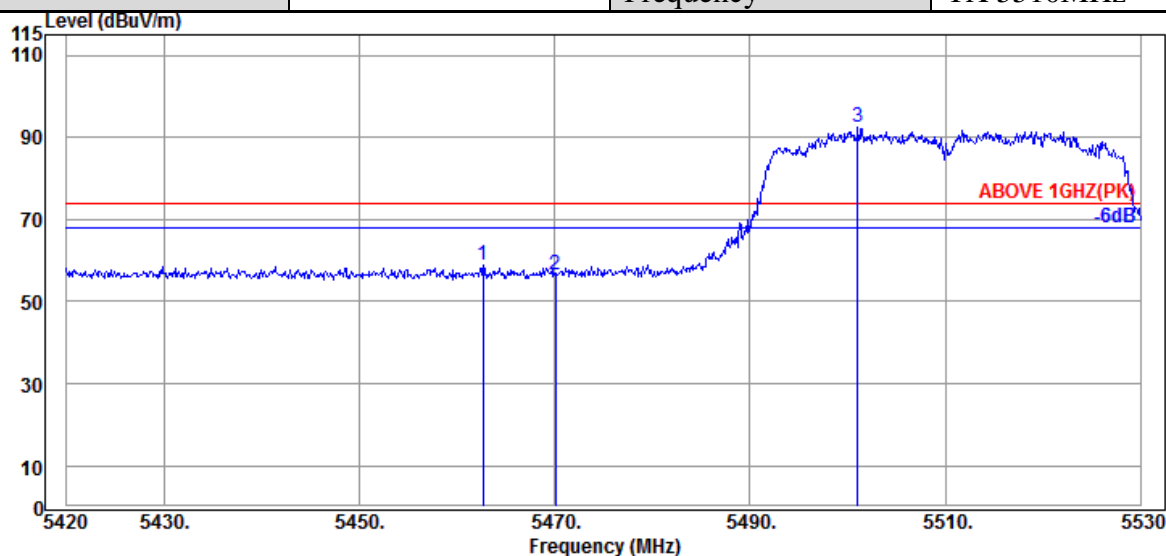

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5462.680                 | 34.50                 | 10.91           | 34.24            | 47.63             | 58.80                   | 74.00           | 15.20       | Peak     |
| 5470.050                 | 34.47                 | 10.91           | 34.24            | 45.44             | 56.58                   | 74.00           | 17.42       | Peak     |
| @ 5501.070               | 34.40                 | 10.93           | 34.24            | 81.19             | 92.28                   | ---             | ---         | Peak     |

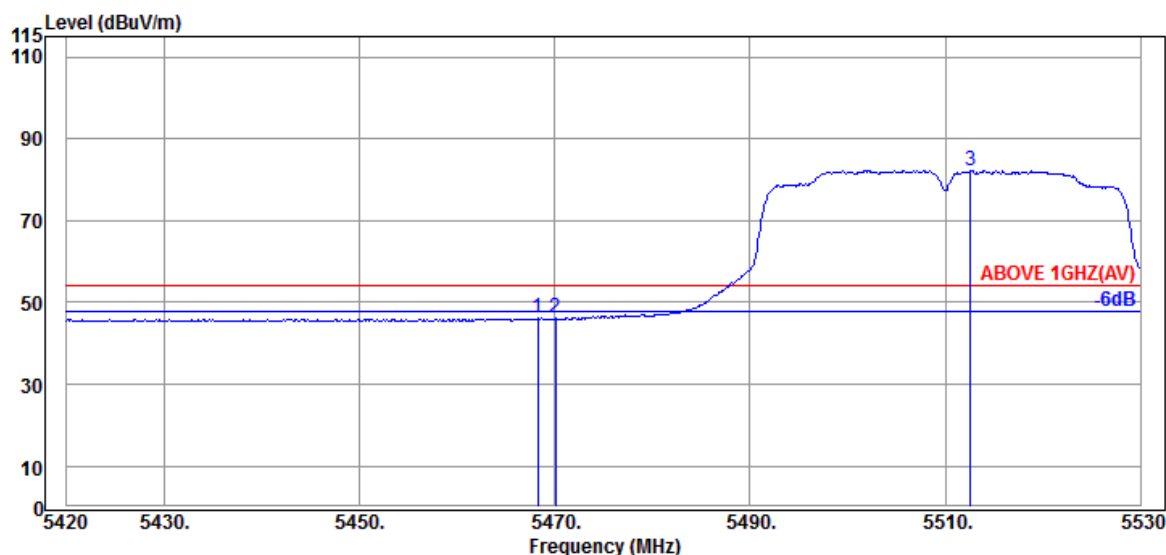

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.290                 | 34.47                 | 10.91           | 34.24            | 34.95             | 46.09                   | 54.00           | 7.91        | Average  |
| 5470.050                 | 34.47                 | 10.91           | 34.24            | 34.90             | 46.04                   | 54.00           | 7.96        | Average  |
| @ 5512.620               | 34.37                 | 10.93           | 34.24            | 71.22             | 82.28                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5510MHz |

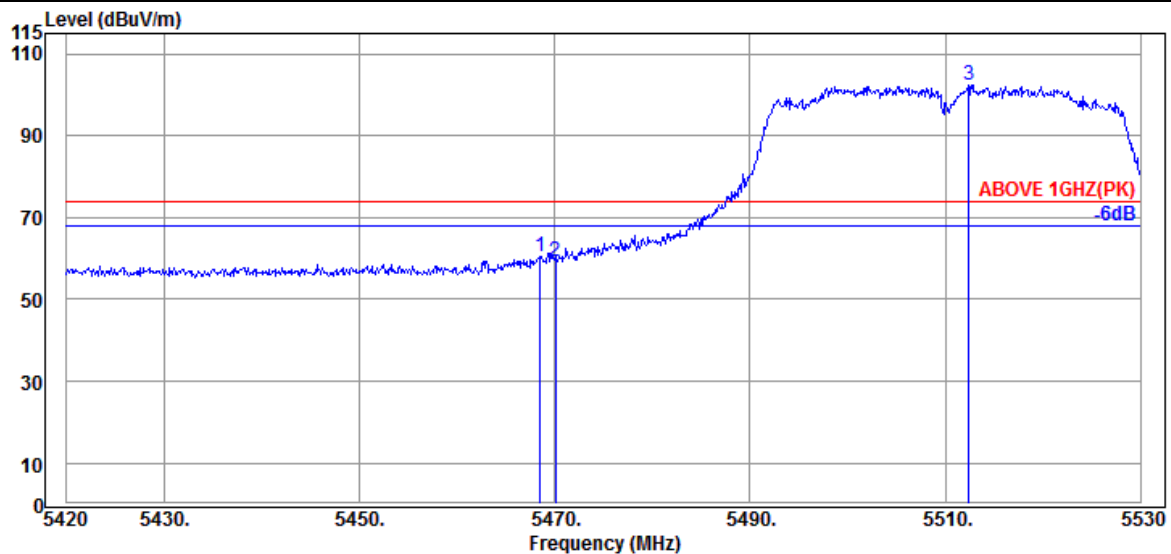

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.510                 | 34.47                 | 10.91           | 34.24            | 49.37             | 60.51                   | 74.00           | 13.49       | Peak     |
| 5470.050                 | 34.47                 | 10.91           | 34.24            | 48.23             | 59.37                   | 74.00           | 14.63       | Peak     |
| @ 5512.400               | 34.37                 | 10.93           | 34.24            | 91.25             | 102.31                  | ---             | ---         | Peak     |

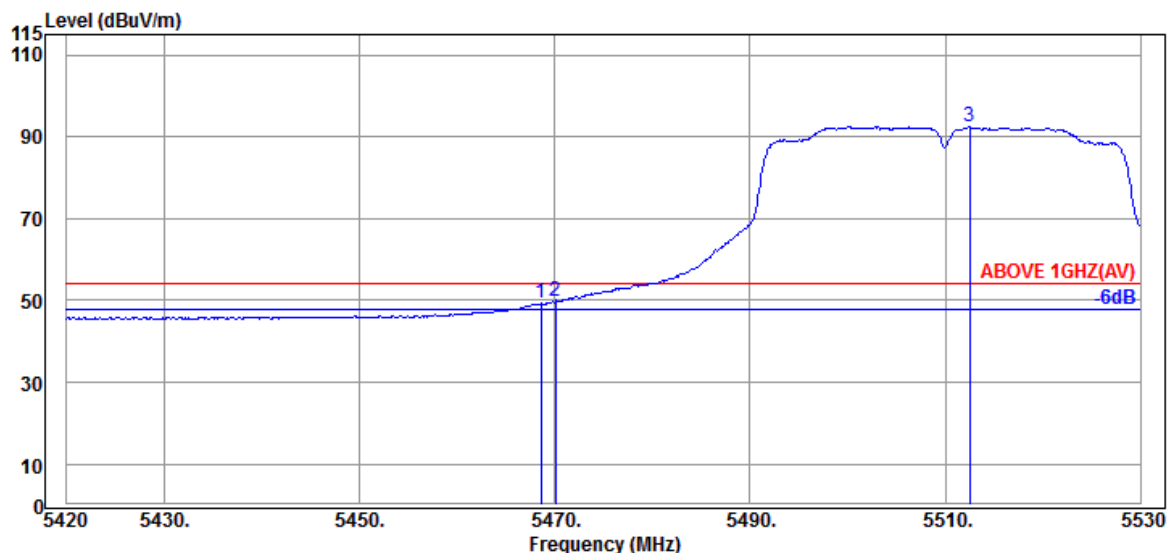

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.620                 | 34.47                 | 10.91           | 34.24            | 38.06             | 49.20                   | 54.00           | 4.80        | Average  |
| 5470.050                 | 34.47                 | 10.91           | 34.24            | 38.71             | 49.85                   | 54.00           | 4.15        | Average  |
| @ 5512.510               | 34.37                 | 10.93           | 34.24            | 81.47             | 92.53                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5670MHz |

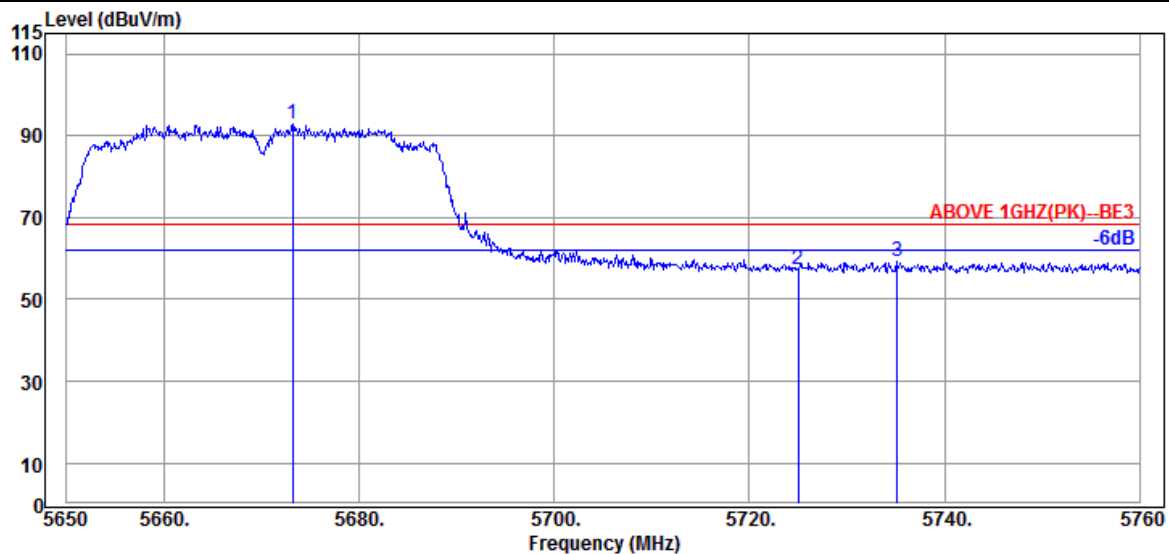

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5673.210               | 34.40                 | 11.03           | 34.30            | 81.59             | 92.72                   | ---             | ---         | Peak     |
| 5725.020                 | 34.67                 | 11.05           | 34.32            | 46.04             | 57.44                   | 68.20           | 10.76       | Peak     |
| 5735.140                 | 34.67                 | 11.05           | 34.33            | 47.71             | 59.10                   | 68.20           | 9.10        | Peak     |

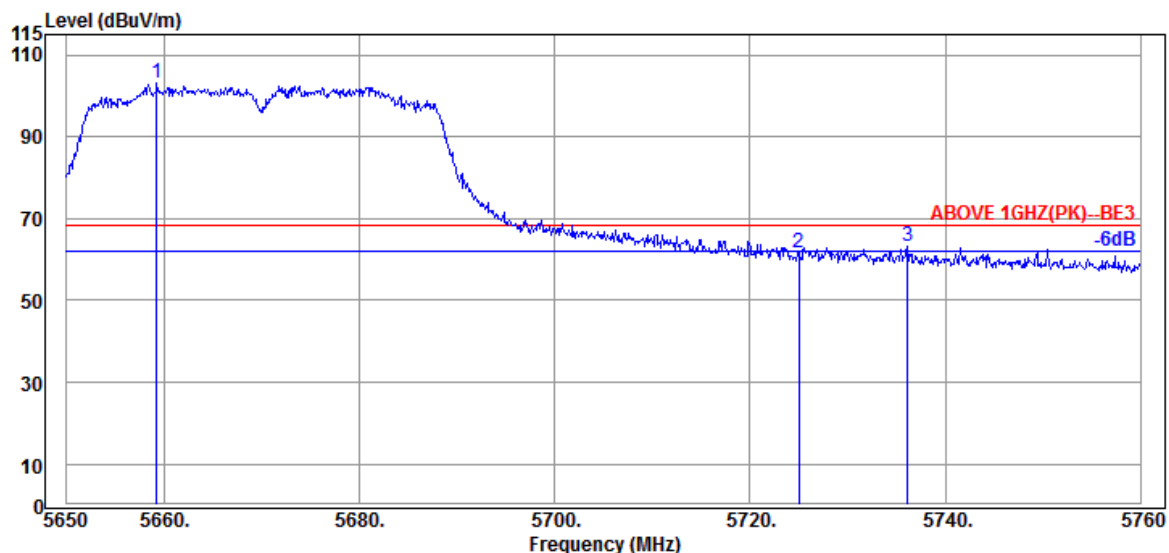


#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5659.240               | 34.40                 | 11.01           | 34.30            | 92.16             | 103.27                  | ---             | ---         | Peak     |
| 5725.020                 | 34.67                 | 11.05           | 34.32            | 50.09             | 61.49                   | 68.20           | 6.71        | Peak     |
| 5736.130                 | 34.67                 | 11.05           | 34.33            | 51.66             | 63.05                   | 68.20           | 5.15        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5710MHz |

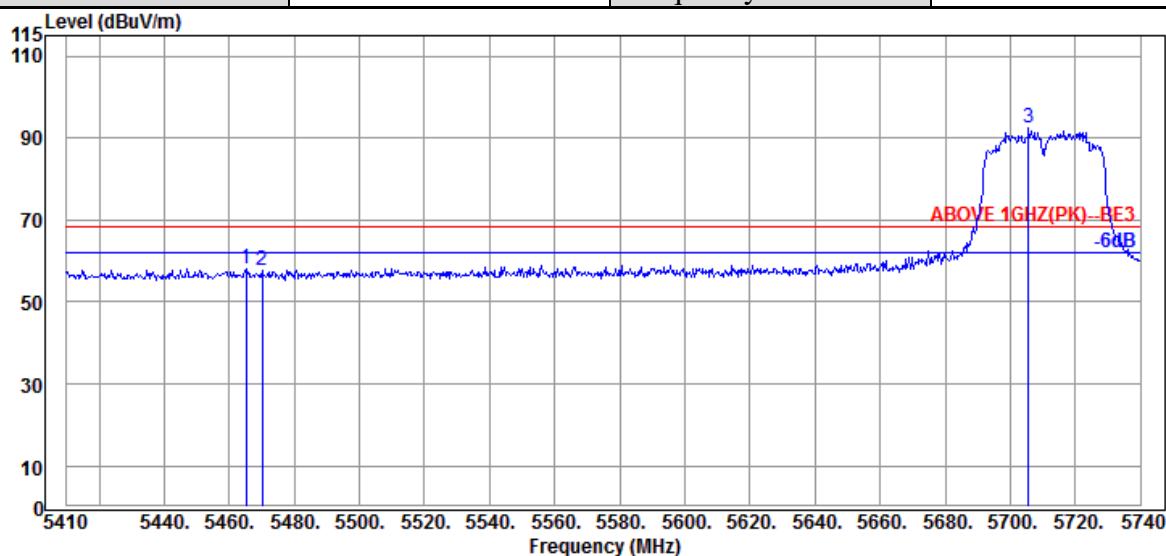

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.110                 | 34.47                 | 10.91           | 34.24            | 47.09             | 58.23                   | 68.20           | 9.97        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 46.38             | 57.52                   | 68.20           | 10.68       | Peak     |
| @ 5705.680               | 34.53                 | 11.03           | 34.32            | 81.21             | 92.45                   | ---             | ---         | Peak     |

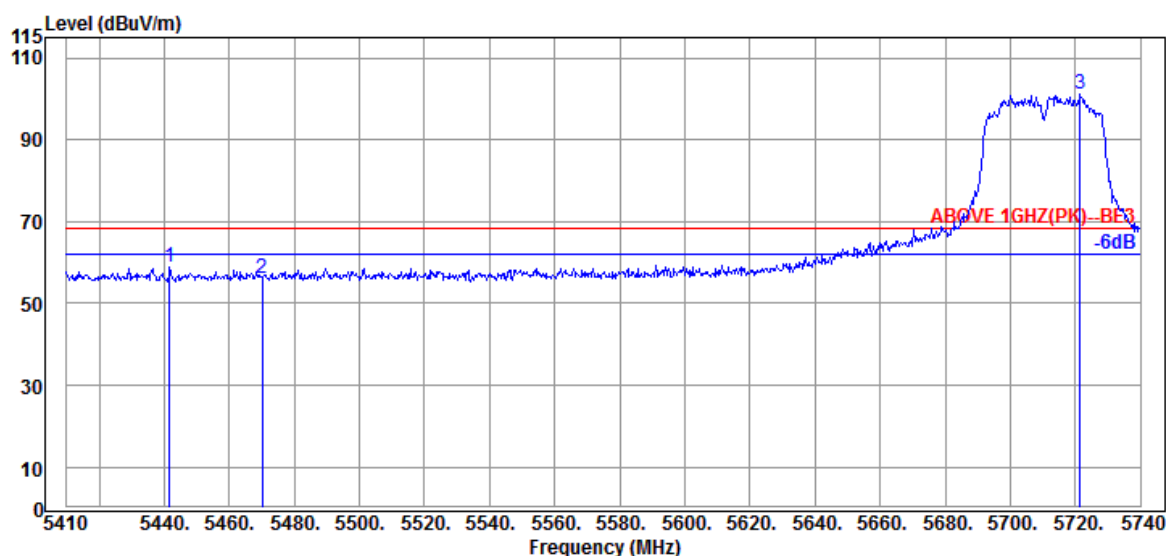


## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5441.680                 | 34.55                 | 10.89           | 34.25            | 47.65             | 58.84                   | 68.20           | 9.36        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 45.12             | 56.26                   | 68.20           | 11.94       | Peak     |
| @ 5721.520               | 34.53                 | 11.05           | 34.32            | 89.74             | 101.00                  | ---             | ---         | Peak     |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5710MHz |

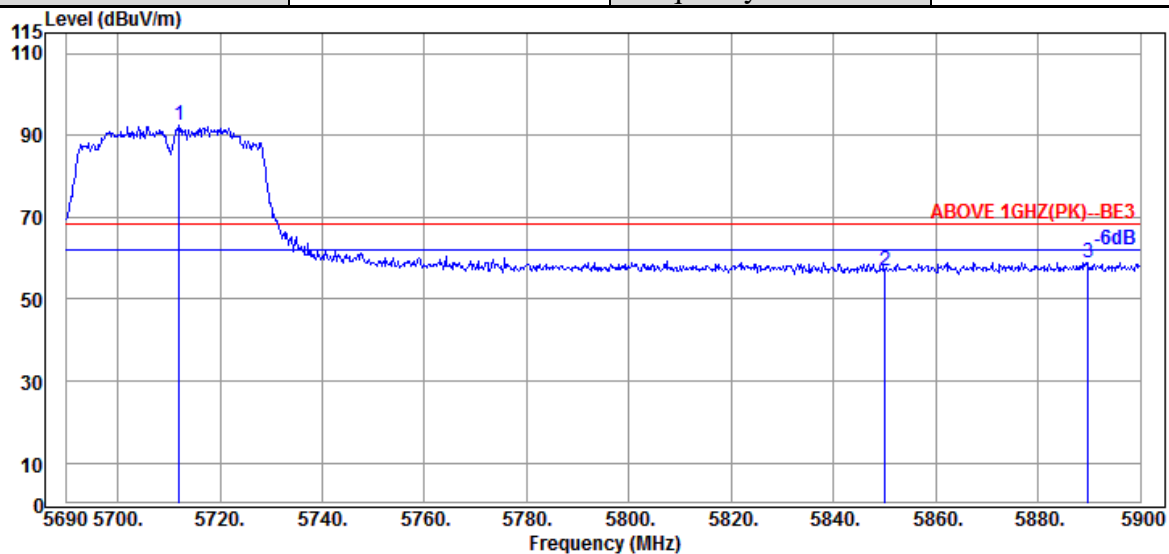

### Antenna at Horizontal Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 5712.050                       | 34.53                       | 11.05                 | 34.32                  | 81.03                   | 92.29                         | ---                | ---            | Peak     |
|   | 5850.020                       | 35.10                       | 11.10                 | 34.38                  | 45.27                   | 57.09                         | 68.20              | 11.11          | Peak     |
|   | 5889.710                       | 35.30                       | 11.12                 | 34.40                  | 47.05                   | 59.07                         | 68.20              | 9.13           | Peak     |

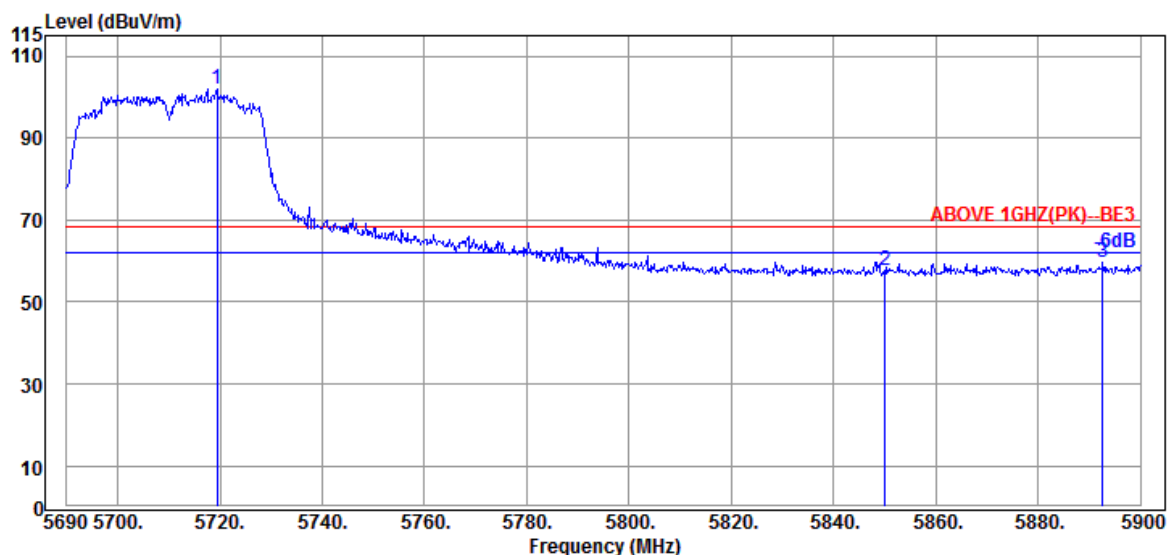

### Antenna at Vertical Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 5719.400                       | 34.53                       | 11.05                 | 34.32                  | 90.79                   | 102.05                        | ---                | ---            | Peak     |
|   | 5850.020                       | 35.10                       | 11.10                 | 34.38                  | 45.86                   | 57.68                         | 68.20              | 10.52          | Peak     |
|   | 5892.650                       | 35.40                       | 11.12                 | 34.40                  | 47.38                   | 59.50                         | 68.20              | 8.70           | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**File Number: C1M2106154**

---

---

**Report Number: EM-F210482**


*This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.*

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | III        |
|      |              | Frequency  | TX 5755MHz |

#### Antenna at Horizontal Polarization

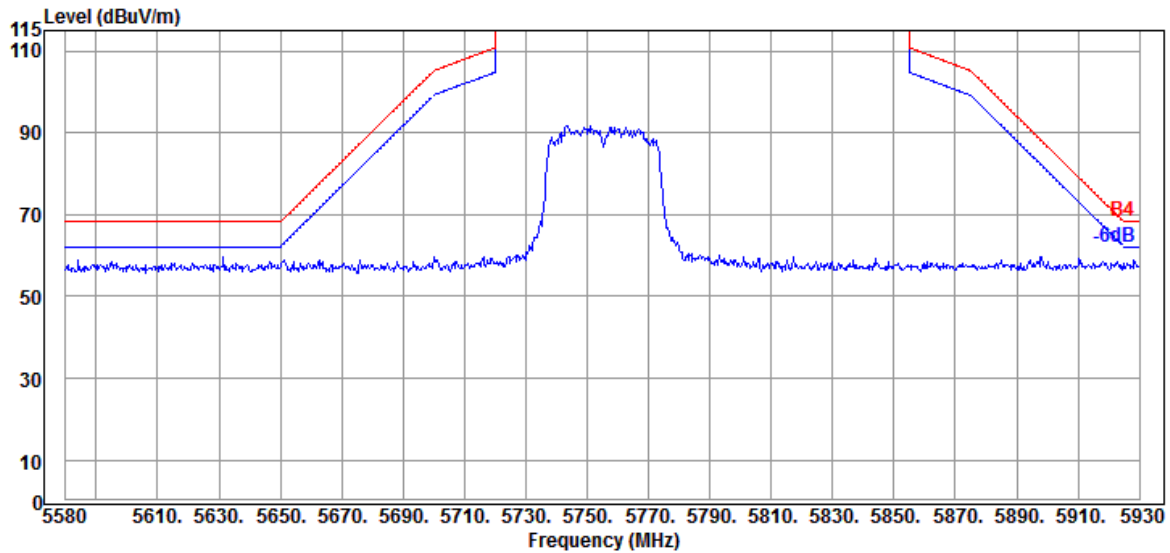

#### Antenna at Vertical Polarization

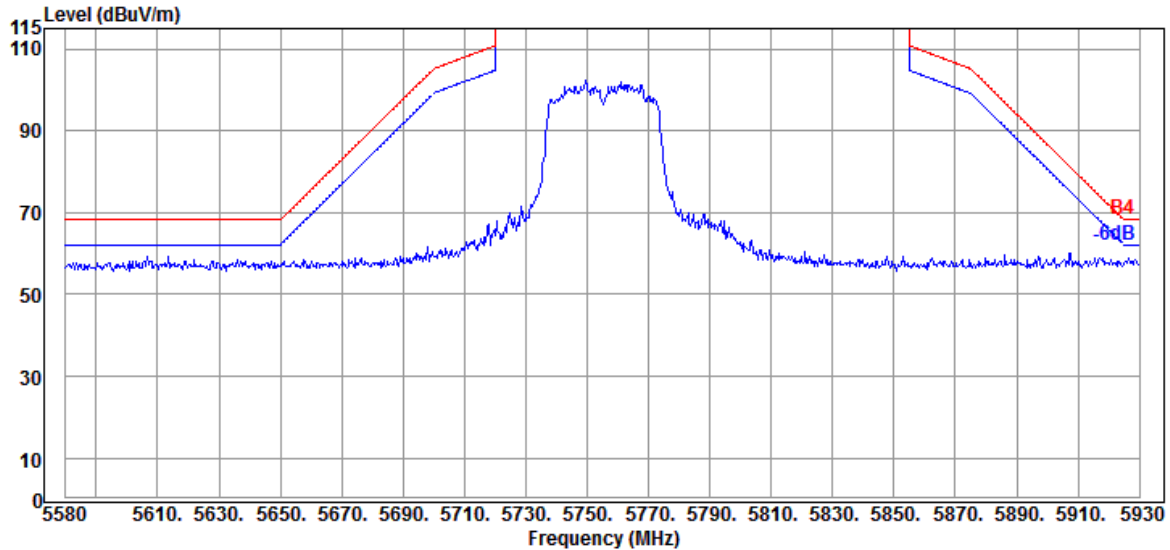


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | III        |
|      |              | Frequency  | TX 5795MHz |


### Antenna at Horizontal Polarization

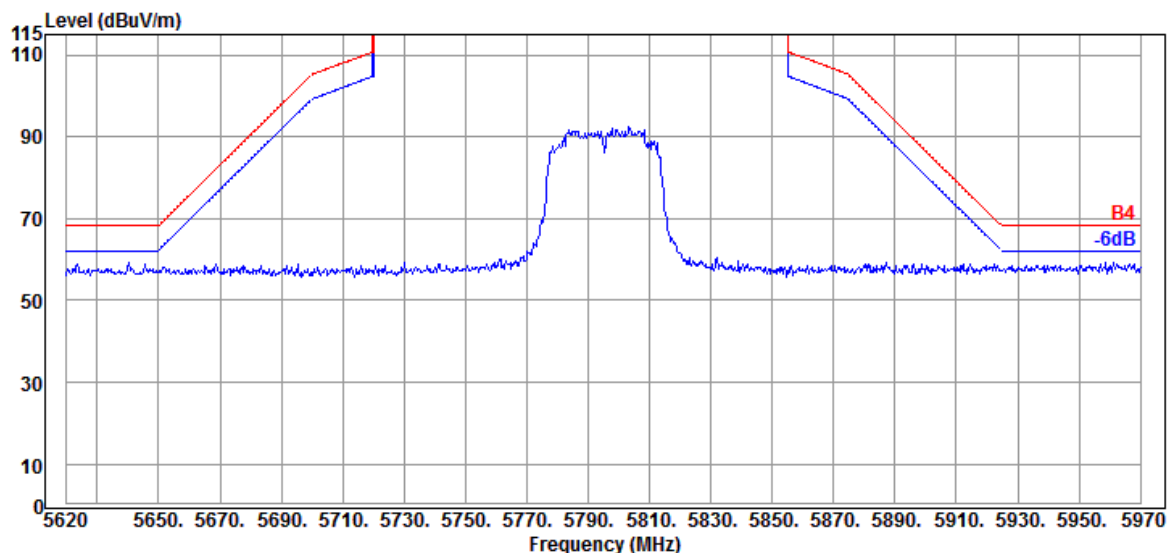

### Antenna at Vertical Polarization

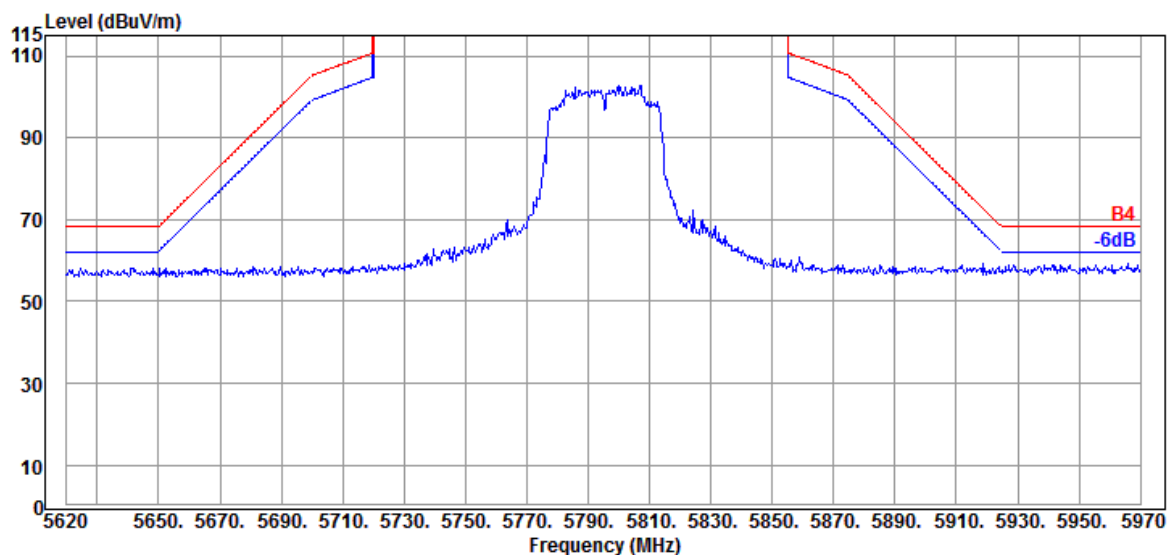


|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | I          |
|      |                | Frequency  | TX 5210MHz |

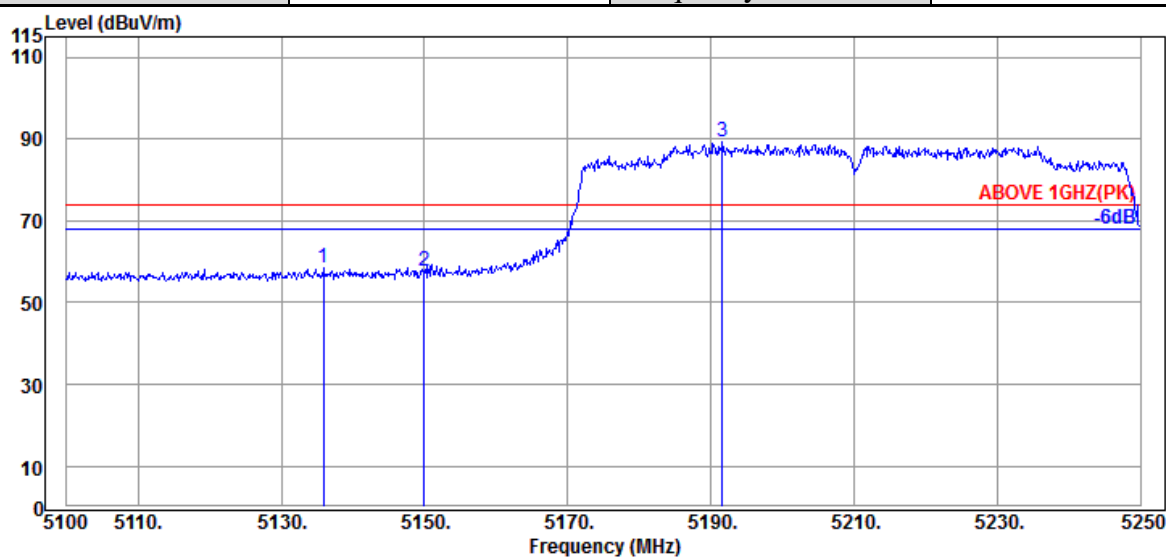

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5135.850                 | 34.17                 | 10.70           | 34.36                  | 47.82             | 58.33                   | 74.00           | 15.67       | Peak     |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 47.12             | 57.67                   | 74.00           | 16.33       | Peak     |
| @ 5191.650               | 34.20                 | 10.74           | 34.34                  | 78.57             | 89.17                   | ---             | ---         | Peak     |

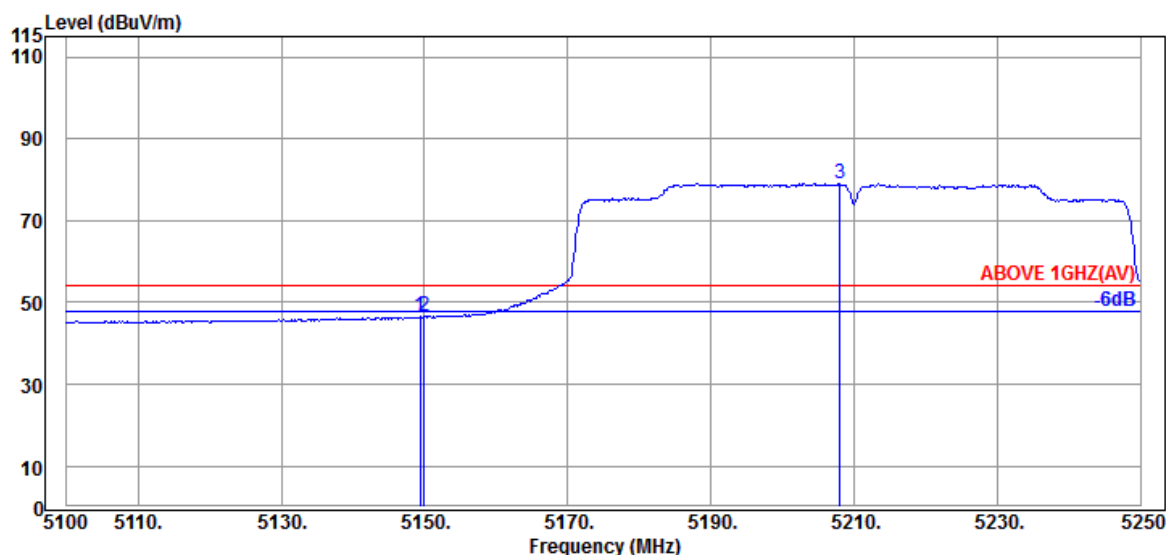

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.350                 | 34.20                 | 10.70           | 34.35                  | 35.91             | 46.46                   | 54.00           | 7.54        | Average  |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 35.91             | 46.46                   | 54.00           | 7.54        | Average  |
| @ 5208.000               | 34.25                 | 10.74           | 34.33                  | 68.40             | 79.06                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | I          |
|      |                | Frequency  | TX 5210MHz |

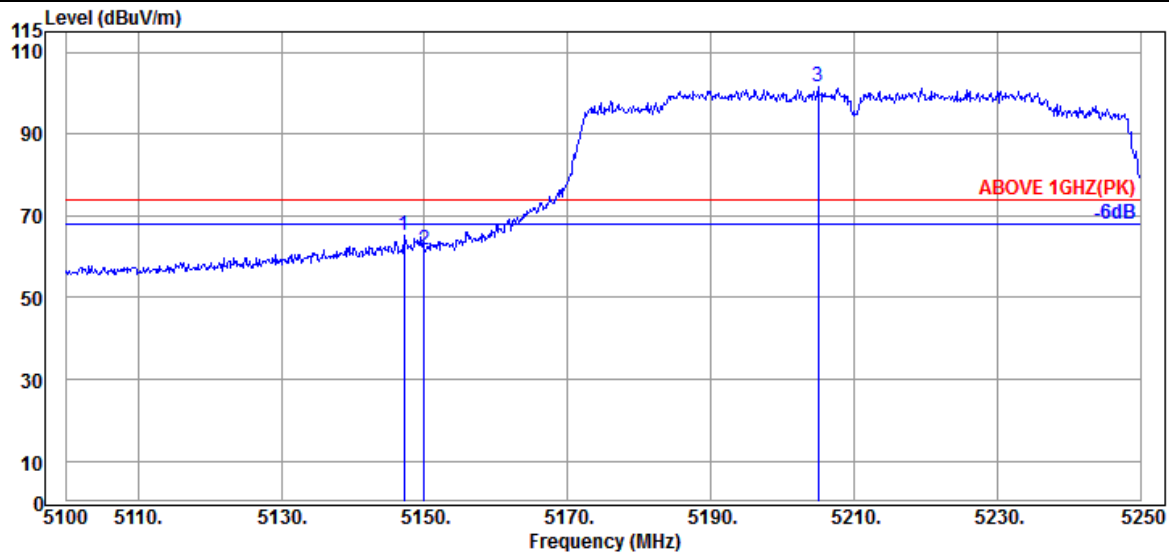

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.100                 | 34.20                 | 10.70           | 34.35                  | 54.49             | 65.04                   | 74.00           | 8.96        | Peak     |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 51.21             | 61.76                   | 74.00           | 12.24       | Peak     |
| @ 5205.000               | 34.25                 | 10.74           | 34.33                  | 90.82             | 101.48                  | ---             | ---         | Peak     |

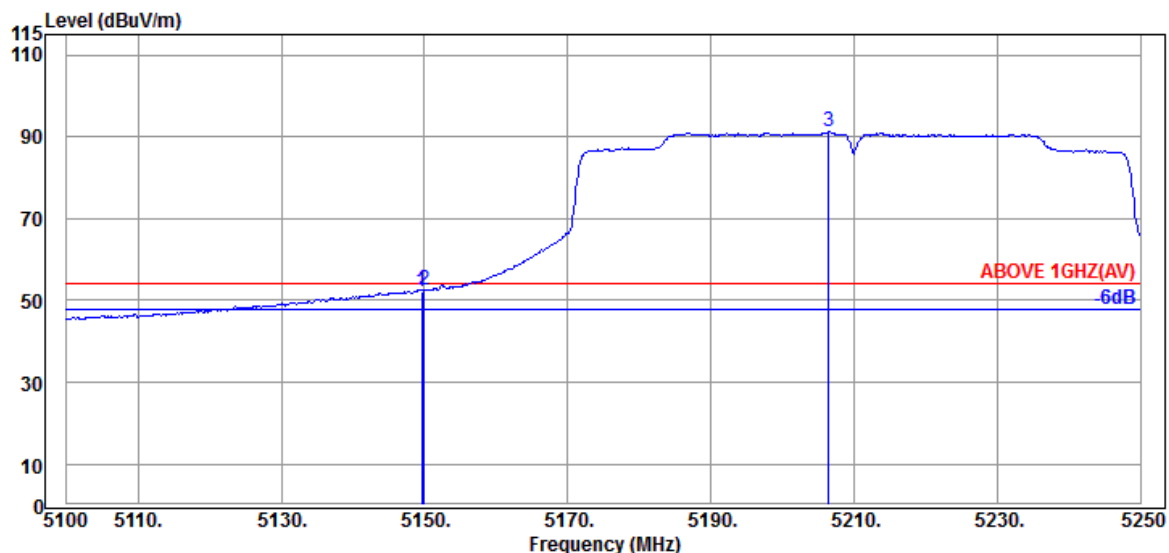

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.650                 | 34.20                 | 10.70           | 34.35                  | 41.80             | 52.35                   | 54.00           | 1.65        | Average  |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 41.82             | 52.37                   | 54.00           | 1.63        | Average  |
| @ 5206.500               | 34.25                 | 10.74           | 34.33                  | 80.66             | 91.32                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A         |
|      |                | Frequency  | TX 5290MHz |

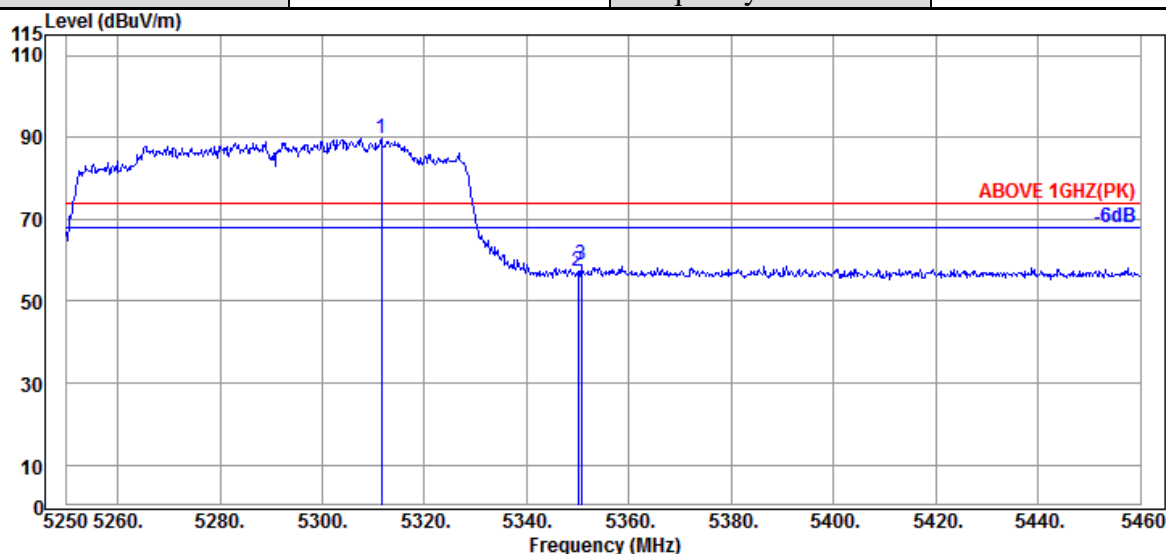

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5311.530               | 34.53                 | 10.81           | 34.29                  | 78.55             | 89.60                   | ---             | ---         | Peak     |
| 5349.960                 | 34.60                 | 10.83           | 34.27                  | 46.03             | 57.19                   | 74.00           | 16.81       | Peak     |
| 5350.590                 | 34.60                 | 10.83           | 34.27                  | 47.70             | 58.86                   | 74.00           | 15.14       | Peak     |

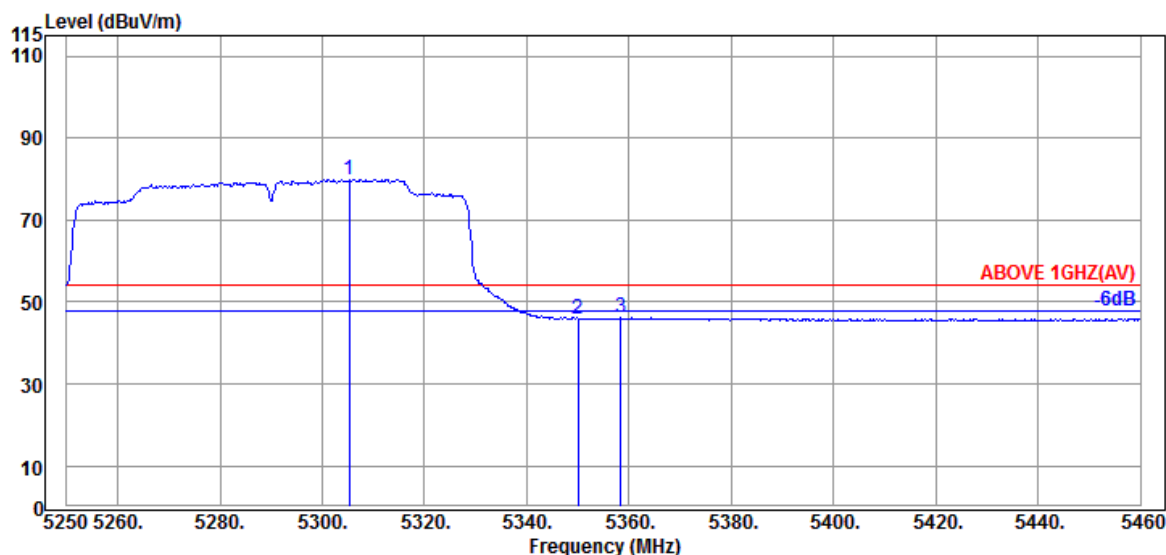


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5305.230               | 34.50                 | 10.81           | 34.29                  | 68.96             | 79.98                   | ---             | ---         | Average  |
| 5349.960                 | 34.60                 | 10.83           | 34.27                  | 34.80             | 45.96                   | 54.00           | 8.04        | Average  |
| 5358.360                 | 34.63                 | 10.85           | 34.27                  | 34.89             | 46.10                   | 54.00           | 7.90        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A         |
|      |                | Frequency  | TX 5290MHz |

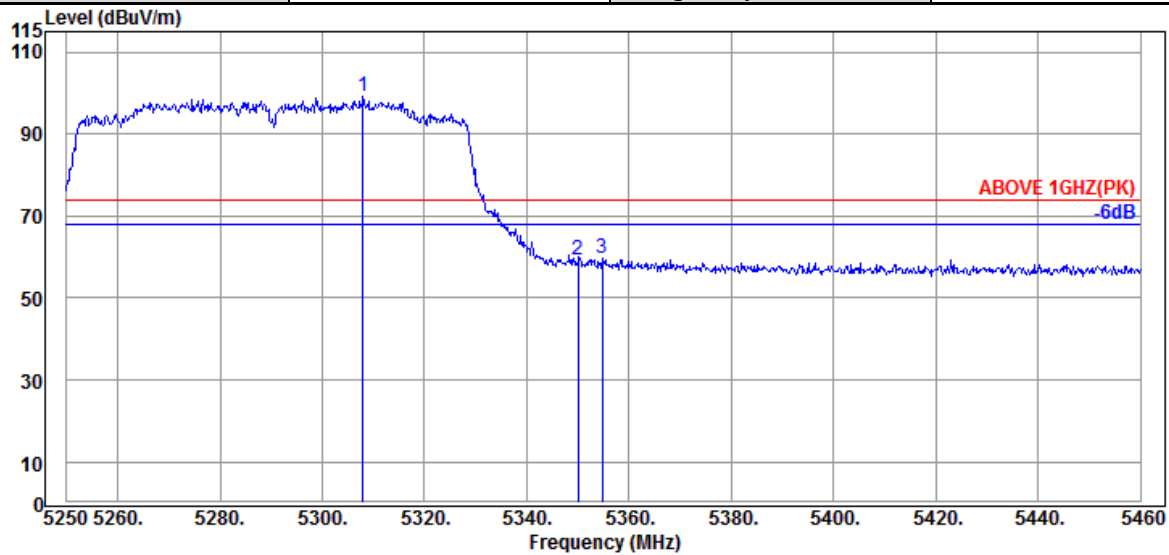

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5307.960               | 34.53                 | 10.81           | 34.29            | 87.97             | 99.02                   | ---             | ---         | Peak     |
| 5349.960                 | 34.60                 | 10.83           | 34.27            | 48.29             | 59.45                   | 74.00           | 14.55       | Peak     |
| 5354.790                 | 34.63                 | 10.83           | 34.27            | 48.58             | 59.77                   | 74.00           | 14.23       | Peak     |

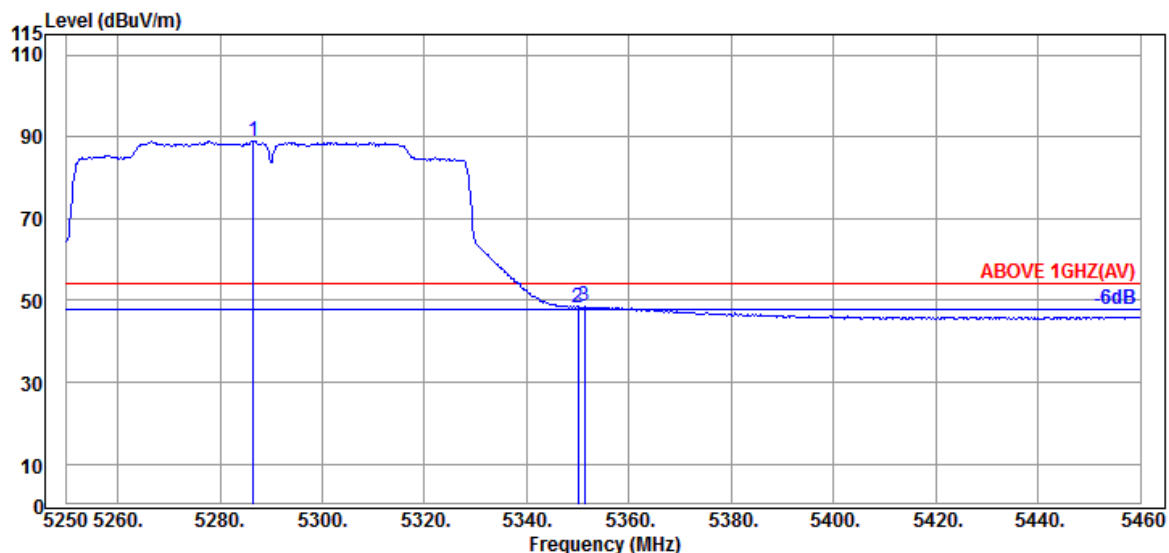

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5286.540               | 34.47                 | 10.79           | 34.30            | 78.08             | 89.04                   | ---             | ---         | Average  |
| 5349.960                 | 34.60                 | 10.83           | 34.27            | 37.21             | 48.37                   | 54.00           | 5.63        | Average  |
| 5351.220                 | 34.60                 | 10.83           | 34.27            | 37.37             | 48.53                   | 54.00           | 5.47        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5530MHz |

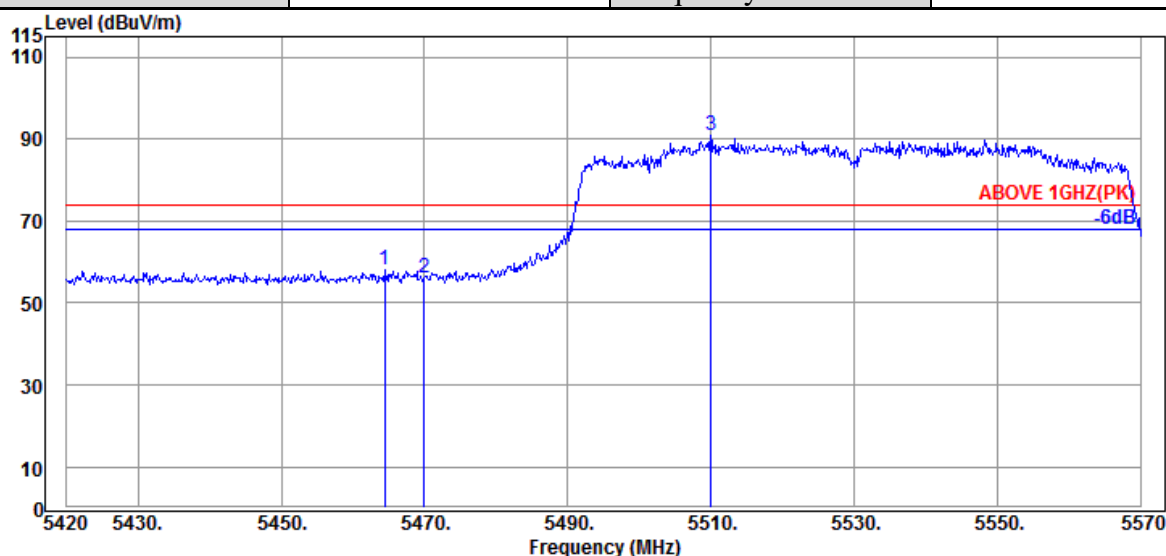

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5464.400                 | 34.47                 | 10.91           | 34.24                  | 47.11             | 58.25                   | 74.00           | 15.75       | Peak     |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 44.82             | 55.96                   | 74.00           | 18.04       | Peak     |
| @ 5510.000               | 34.40                 | 10.93           | 34.24                  | 79.91             | 91.00                   | ---             | ---         | Peak     |

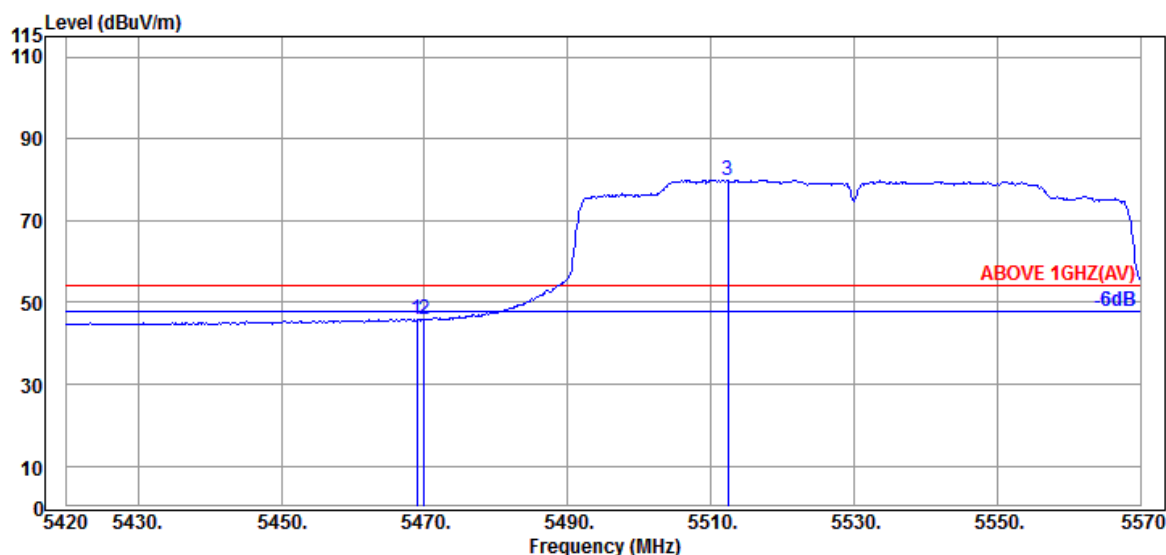


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.900                 | 34.47                 | 10.91           | 34.24                  | 34.81             | 45.95                   | 54.00           | 8.05        | Average  |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 34.65             | 45.79                   | 54.00           | 8.21        | Average  |
| @ 5512.400               | 34.37                 | 10.93           | 34.24                  | 68.90             | 79.96                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5530MHz |

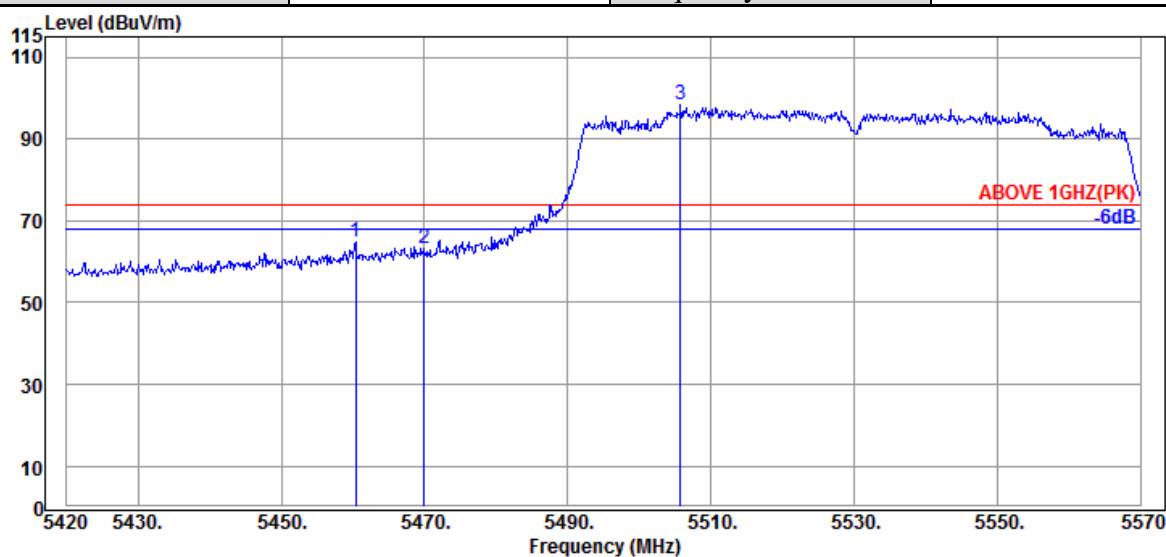

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5460.350                 | 34.50                 | 10.91           | 34.24            | 53.50             | 64.67                   | 74.00           | 9.33        | Peak     |
| 5469.950                 | 34.47                 | 10.91           | 34.24            | 52.23             | 63.37                   | 74.00           | 10.63       | Peak     |
| @ 5505.800               | 34.40                 | 10.93           | 34.24            | 87.31             | 98.40                   | ---             | ---         | Peak     |

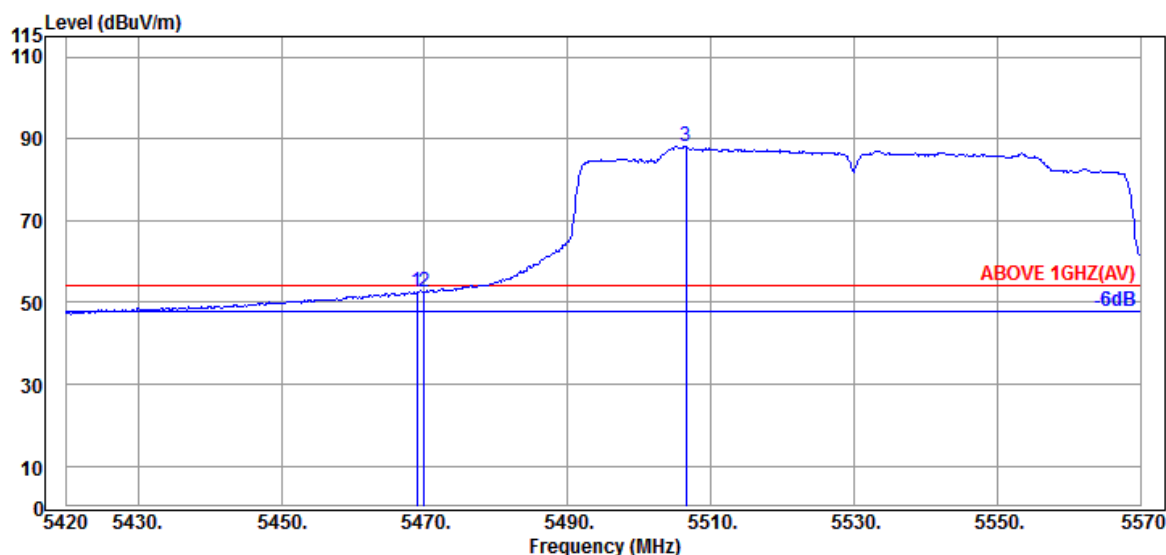

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.900                 | 34.47                 | 10.91           | 34.24            | 41.28             | 52.42                   | 54.00           | 1.58        | Average  |
| 5469.950                 | 34.47                 | 10.91           | 34.24            | 41.53             | 52.67                   | 54.00           | 1.33        | Average  |
| @ 5506.550               | 34.40                 | 10.93           | 34.24            | 77.22             | 88.31                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5610MHz |

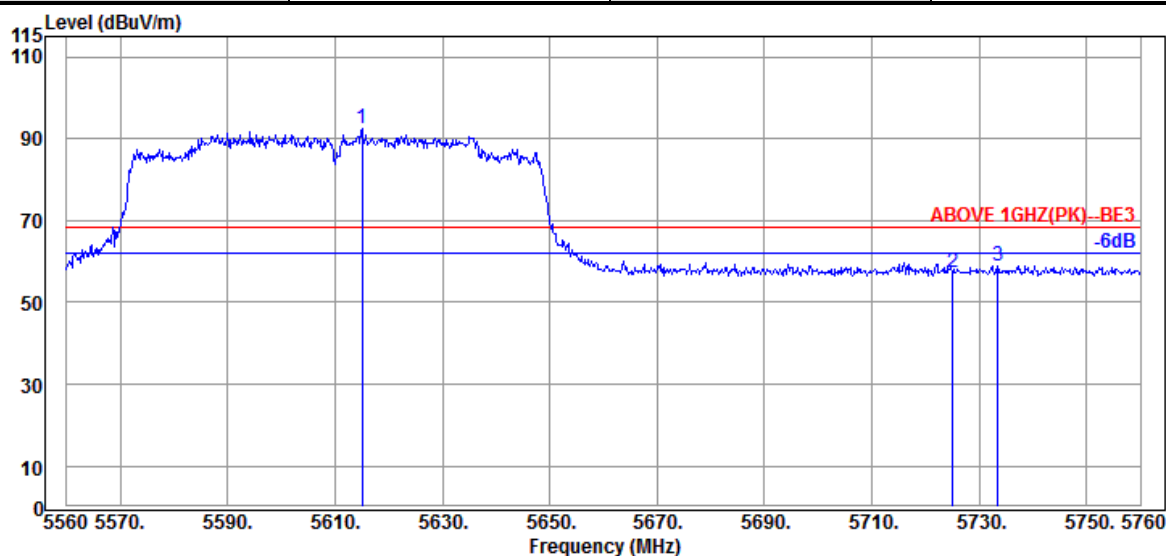

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5615.000               | 34.40                 | 10.99           | 34.28            | 81.44             | 92.55                   | ---             | ---         | Peak     |
| 5725.000                 | 34.67                 | 11.05           | 34.32            | 45.75             | 57.15                   | 68.20           | 11.05       | Peak     |
| 5615.000                 | 34.40                 | 10.99           | 34.28            | 81.44             | 92.55                   | 68.20           | -24.35      | Peak     |

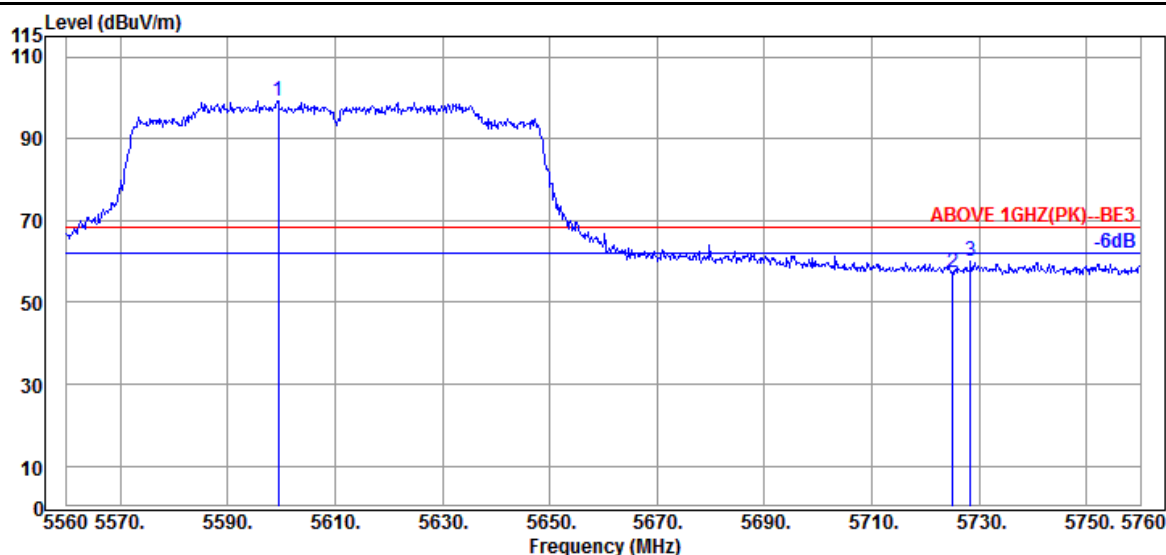

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5599.400               | 34.40                 | 10.97           | 34.27            | 88.18             | 99.28                   | ---             | ---         | Peak     |
| 5725.000                 | 34.67                 | 11.05           | 34.32            | 45.90             | 57.30                   | 68.20           | 10.90       | Peak     |
| 5728.400                 | 34.67                 | 11.05           | 34.32            | 48.72             | 60.12                   | 68.20           | 8.08        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5690MHz |

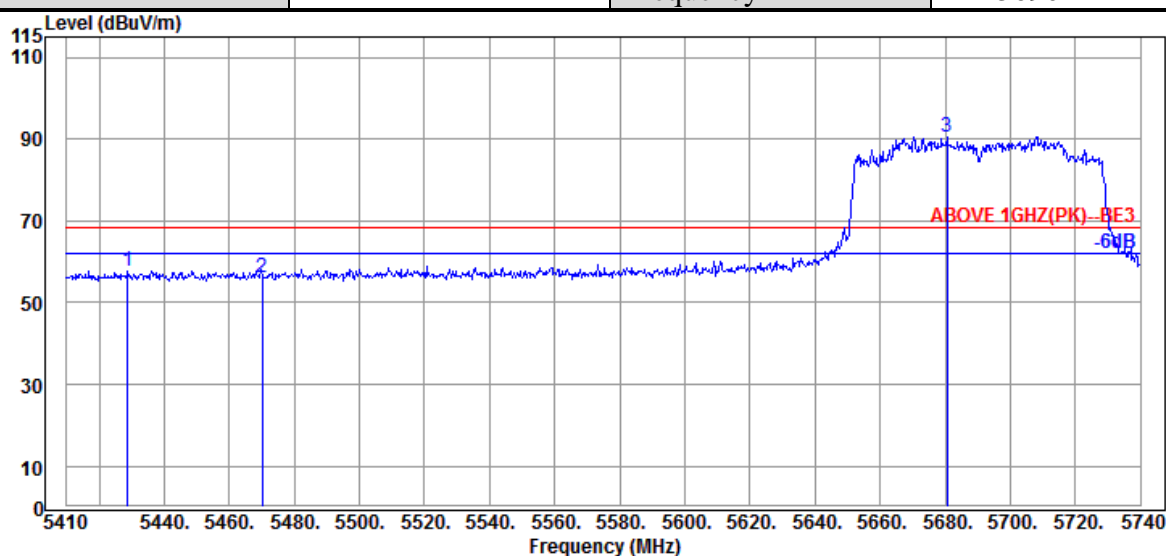

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5428.810                 | 34.60                 | 10.89           | 34.25            | 46.33             | 57.57                   | 68.20           | 10.63       | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 44.95             | 56.09                   | 68.20           | 12.11       | Peak     |
| @ 5680.600               | 34.40                 | 11.03           | 34.31            | 79.53             | 90.65                   | ---             | ---         | Peak     |

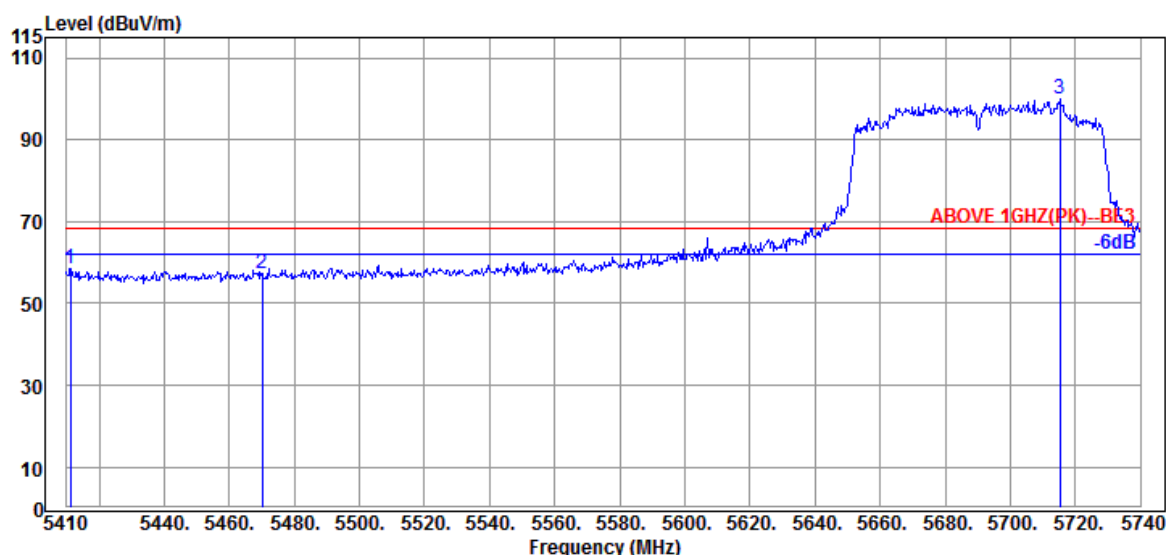

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5411.320                 | 34.65                 | 10.87           | 34.26            | 47.28             | 58.54                   | 68.20           | 9.66        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 45.99             | 57.13                   | 68.20           | 11.07       | Peak     |
| @ 5715.250               | 34.53                 | 11.05           | 34.32            | 88.78             | 100.04                  | ---             | ---         | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5690MHz |

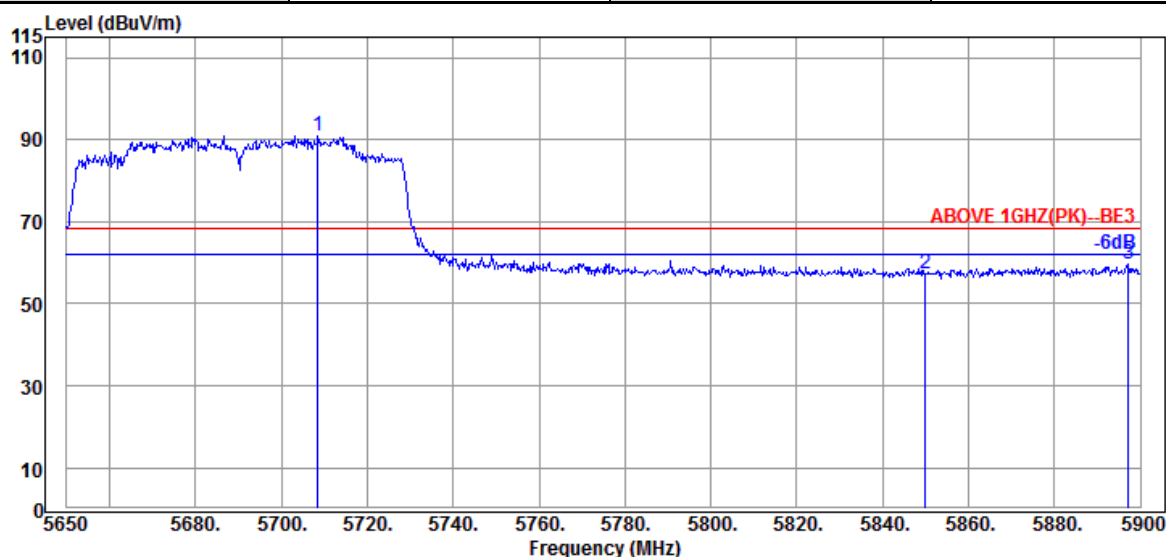

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.500               | 34.53                 | 11.03           | 34.32            | 79.58             | 90.82                   | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38            | 45.46             | 57.28                   | 68.20           | 10.92       | Peak     |
| 5897.250                 | 35.40                 | 11.14           | 34.40            | 47.60             | 59.74                   | 68.20           | 8.46        | Peak     |

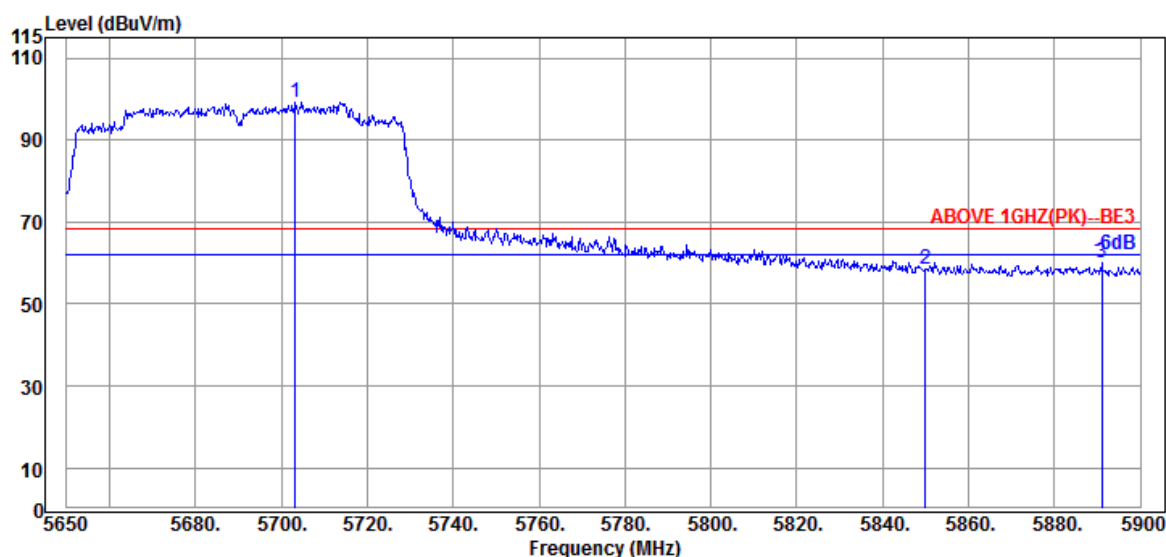

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5703.250               | 34.40                 | 11.03           | 34.31            | 88.10             | 99.22                   | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38            | 46.83             | 58.65                   | 68.20           | 9.55        | Peak     |
| 5891.000                 | 35.40                 | 11.12           | 34.40            | 47.87             | 59.99                   | 68.20           | 8.21        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | III        |
|      |                | Frequency  | TX 5775MHz |

#### Antenna at Horizontal Polarization

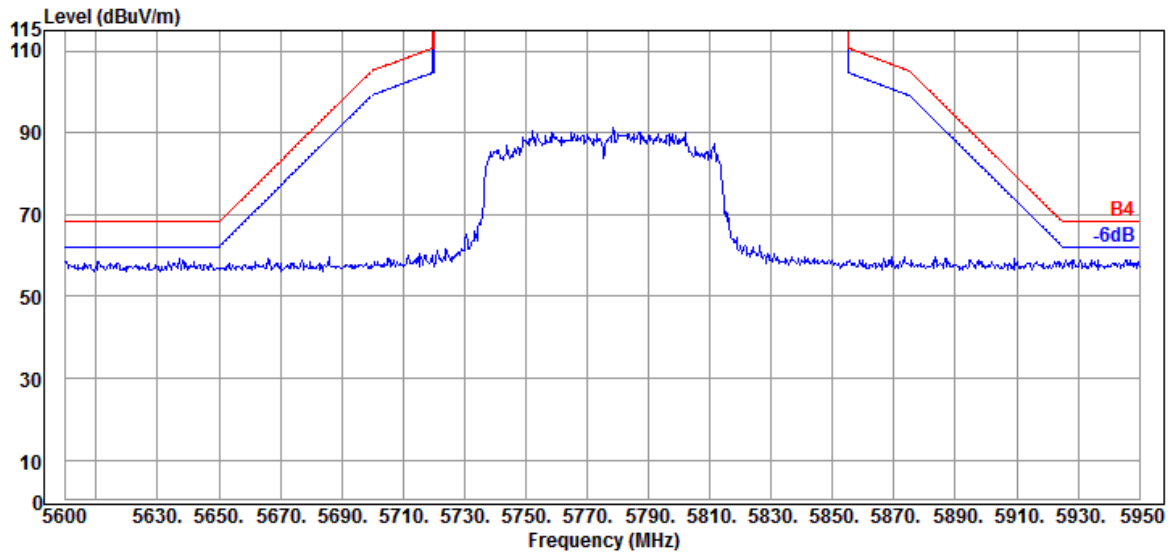


#### Antenna at Vertical Polarization

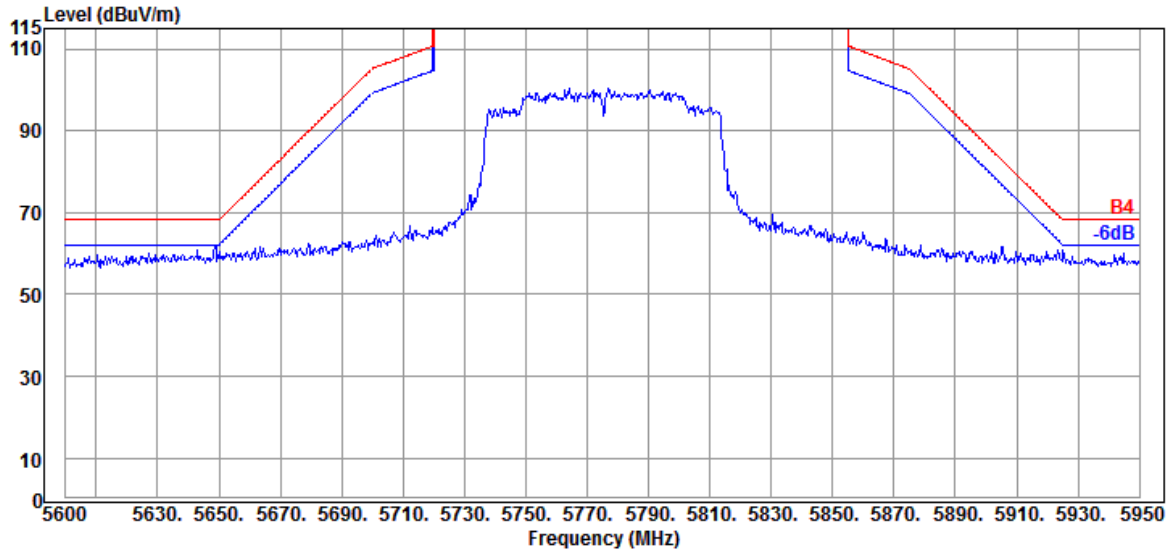

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

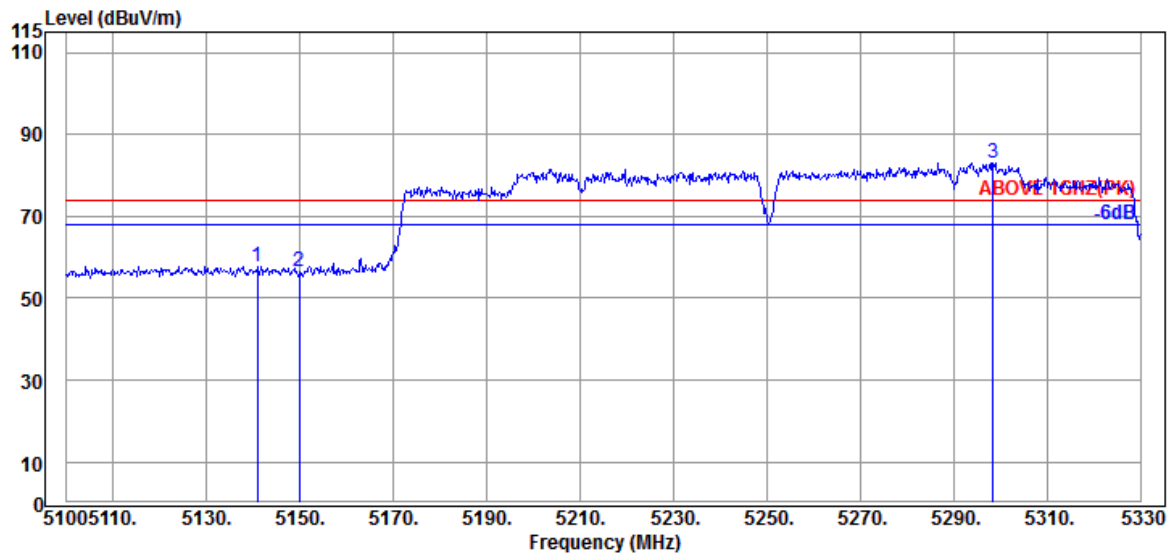

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5140.940                 | 34.17                 | 10.70           | 34.36                  | 47.36             | 57.87                   | 74.00           | 16.13       | Peak     |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 46.11             | 56.66                   | 74.00           | 17.34       | Peak     |
| @ 5298.490               | 34.50                 | 10.81           | 34.29                  | 72.14             | 83.16                   | ---             | ---         | Peak     |

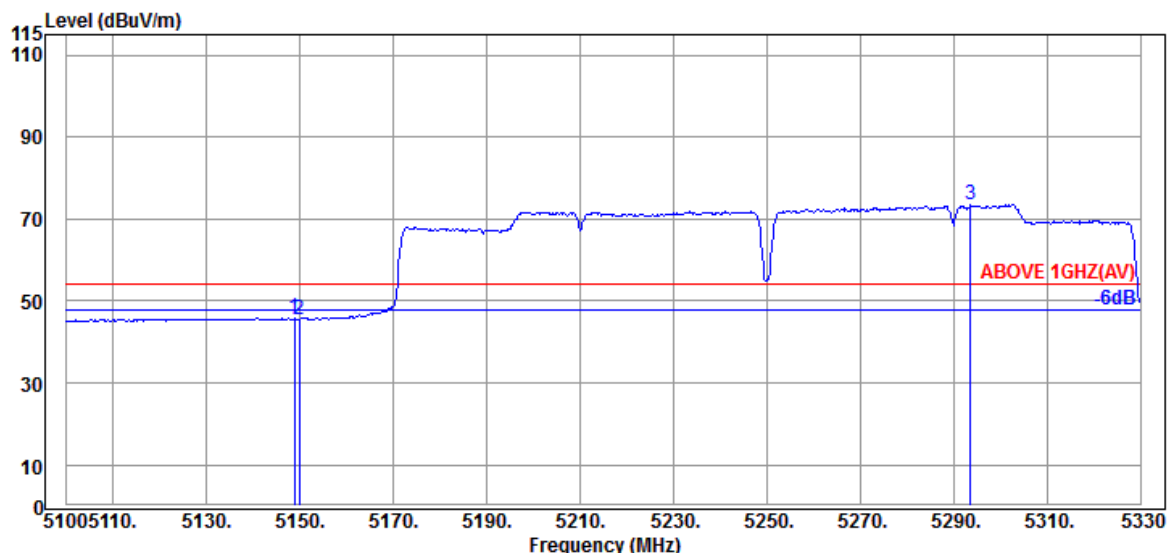

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.760                 | 34.20                 | 10.70           | 34.35                  | 35.15             | 45.70                   | 54.00           | 8.30        | Average  |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 35.07             | 45.62                   | 54.00           | 8.38        | Average  |
| @ 5293.660               | 34.50                 | 10.81           | 34.30                  | 62.46             | 73.47                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

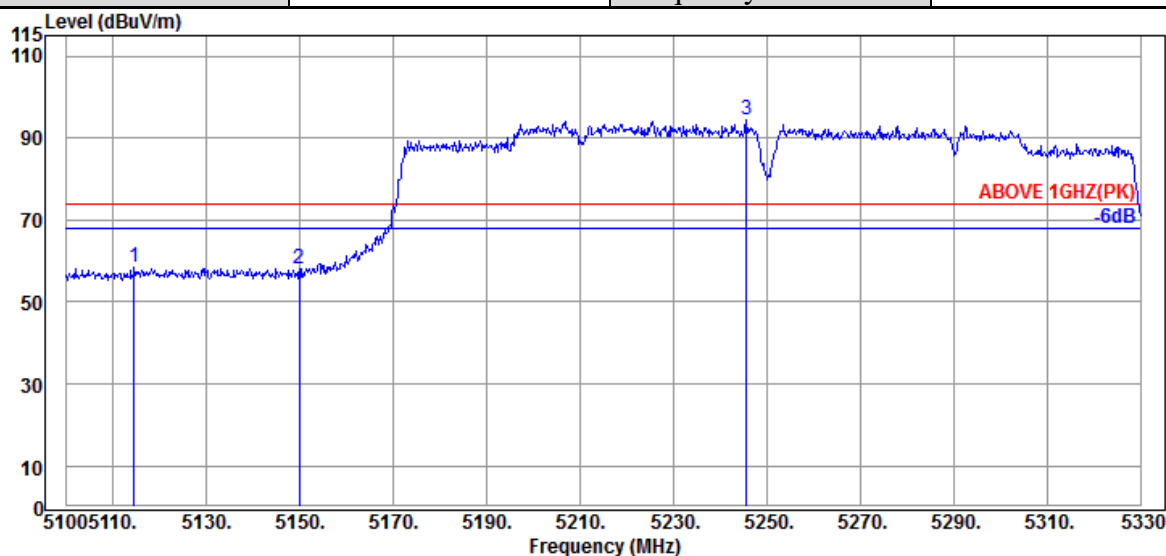

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5114.490                 | 34.13                 | 10.68           | 34.36            | 48.00             | 58.45                   | 74.00           | 15.55       | Peak     |
| 5149.910                 | 34.20                 | 10.70           | 34.35            | 47.35             | 57.90                   | 74.00           | 16.10       | Peak     |
| @ 5245.590               | 34.35                 | 10.76           | 34.32            | 83.58             | 94.37                   | ---             | ---         | Peak     |

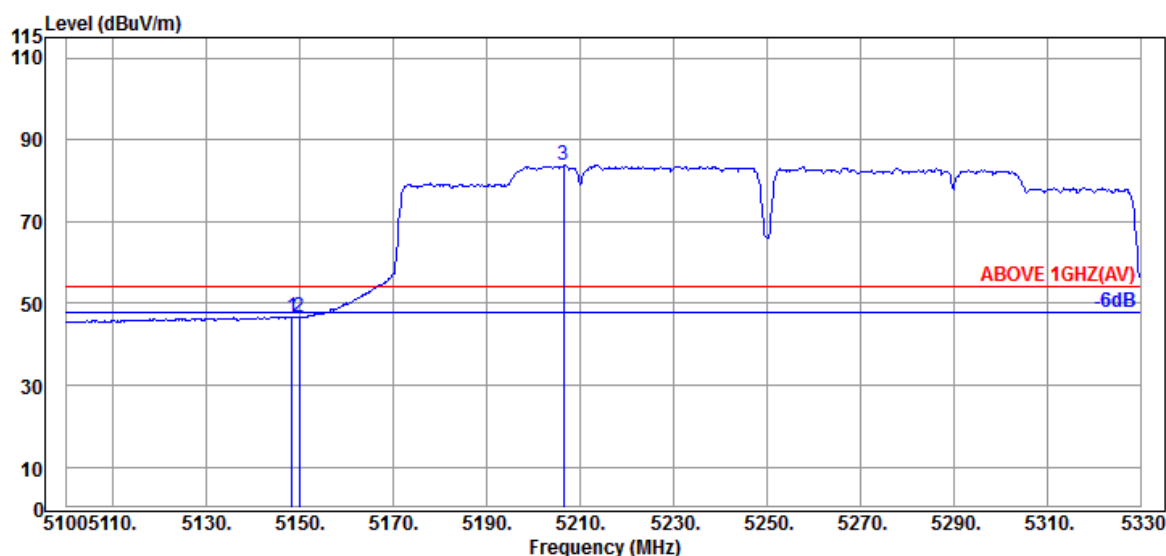

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.300                 | 34.20                 | 10.70           | 34.35            | 36.21             | 46.76                   | 54.00           | 7.24        | Average  |
| 5149.910                 | 34.20                 | 10.70           | 34.35            | 36.14             | 46.69                   | 54.00           | 7.31        | Average  |
| @ 5206.490               | 34.25                 | 10.74           | 34.33            | 73.08             | 83.74                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

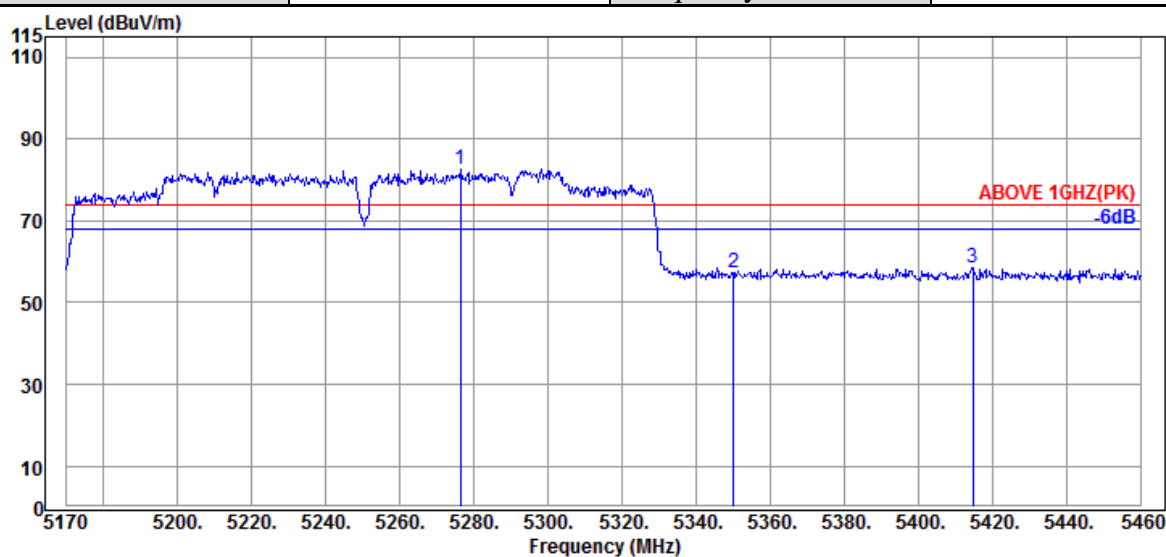

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5276.430               | 34.43                 | 10.79           | 34.30            | 71.74             | 82.66                   | ---             | ---         | Peak     |
| 5350.090                 | 34.60                 | 10.83           | 34.27            | 46.12             | 57.28                   | 74.00           | 16.72       | Peak     |
| 5414.760                 | 34.65                 | 10.87           | 34.26            | 47.41             | 58.67                   | 74.00           | 15.33       | Peak     |

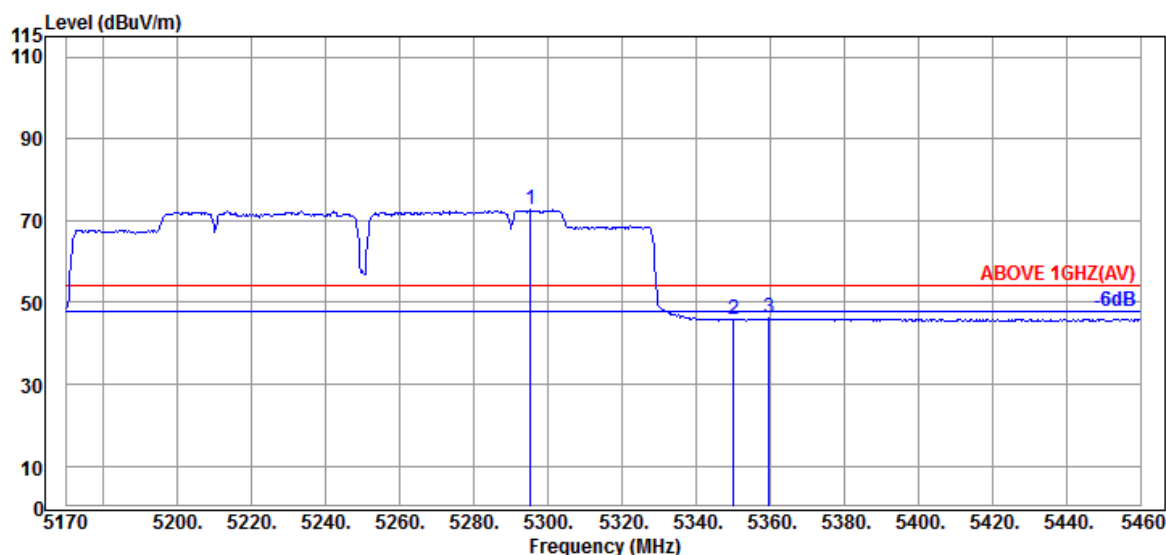

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5295.280               | 34.50                 | 10.81           | 34.30            | 61.53             | 72.54                   | ---             | ---         | Average  |
| 5350.090                 | 34.60                 | 10.83           | 34.27            | 34.58             | 45.74                   | 54.00           | 8.26        | Average  |
| 5359.660                 | 34.63                 | 10.85           | 34.27            | 34.83             | 46.04                   | 54.00           | 7.96        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

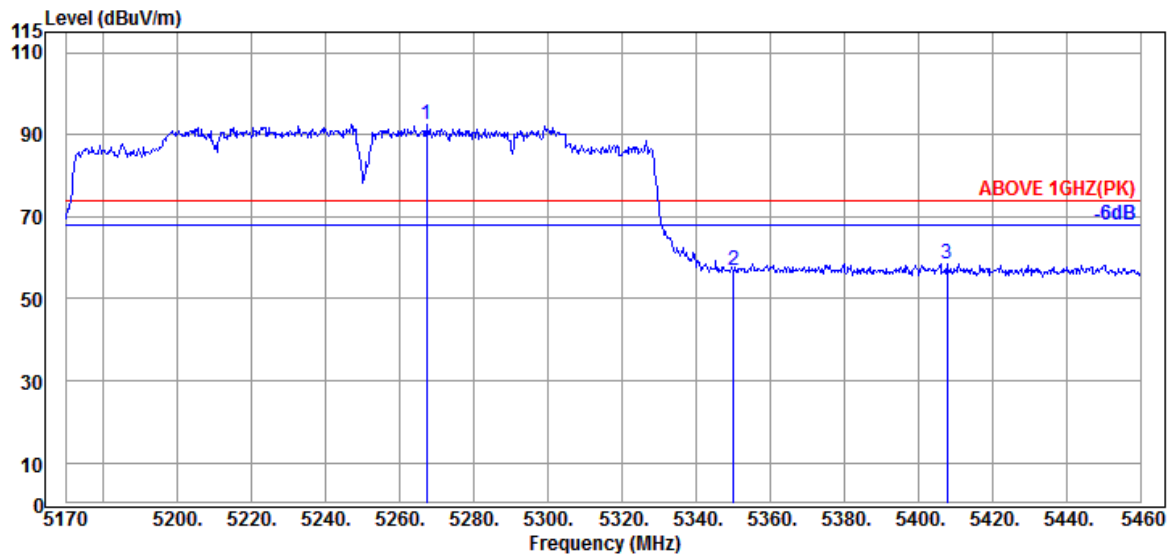

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5267.150                 | 34.43                 | 10.79           | 34.31                  | 81.50             | 92.41                   | ---             | ---         | Peak     |
|   | 5350.090                 | 34.60                 | 10.83           | 34.27                  | 45.57             | 56.73                   | 74.00           | 17.27       | Peak     |
|   | 5407.800                 | 34.65                 | 10.87           | 34.26                  | 47.39             | 58.65                   | 74.00           | 15.35       | Peak     |

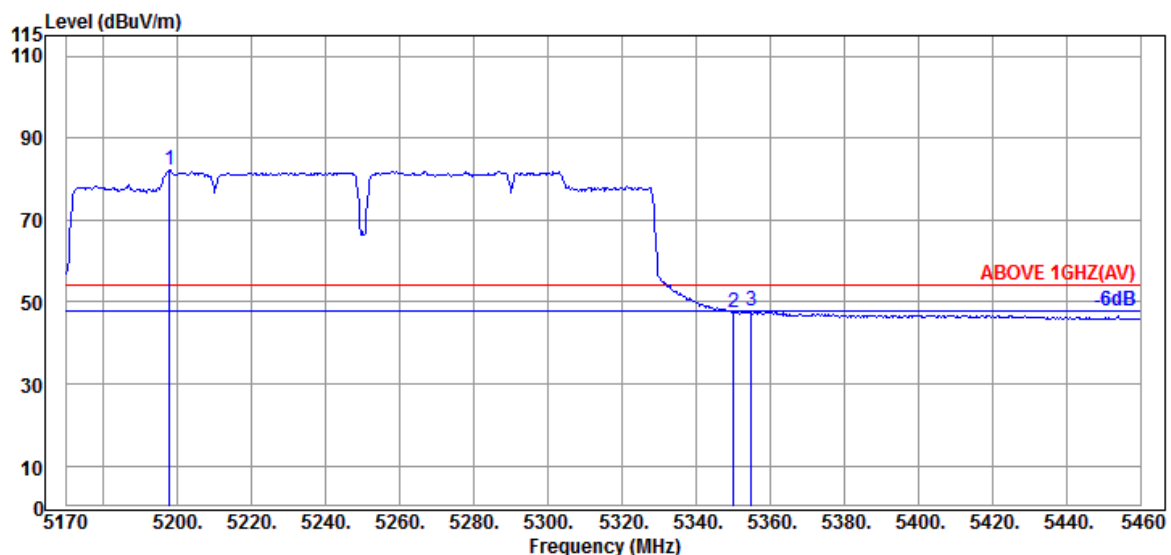

Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5197.840                 | 34.20                 | 10.74           | 34.33                  | 71.63             | 82.24                   | ---             | ---         | Average  |
|   | 5350.090                 | 34.60                 | 10.83           | 34.27                  | 36.34             | 47.50                   | 54.00           | 6.50        | Average  |
|   | 5355.020                 | 34.63                 | 10.83           | 34.27                  | 36.46             | 47.65                   | 54.00           | 6.35        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C         |
|      |                 | Frequency  | TX 5570MHz |

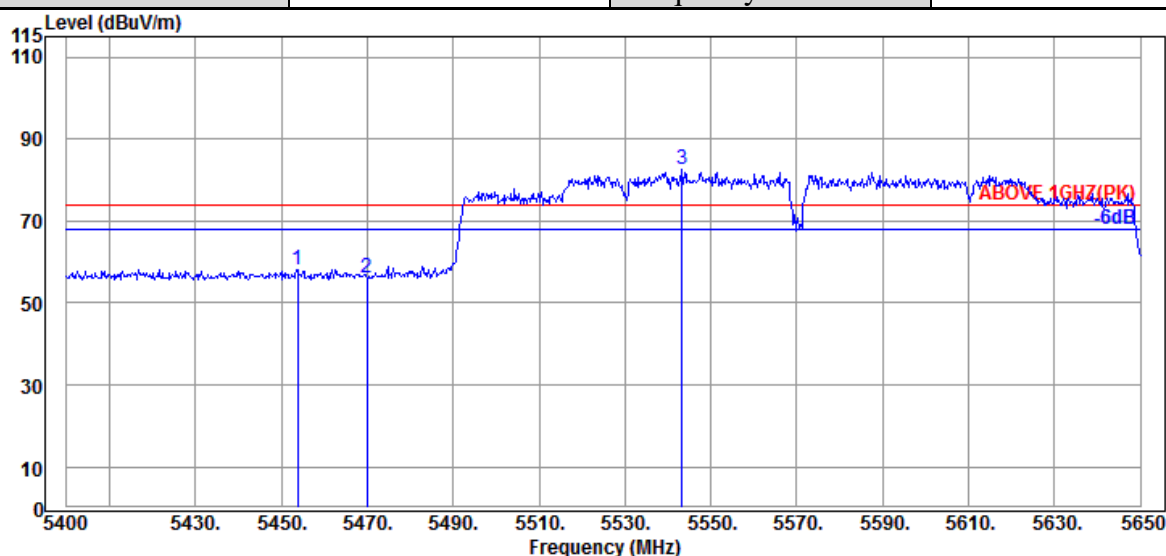

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5453.750                 | 34.50                 | 10.89           | 34.24                  | 47.13             | 58.28                   | 74.00           | 15.72       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 45.01             | 56.15                   | 74.00           | 17.85       | Peak     |
| @ 5543.250               | 34.30                 | 10.95           | 34.25                  | 71.72             | 82.72                   | ---             | ---         | Peak     |

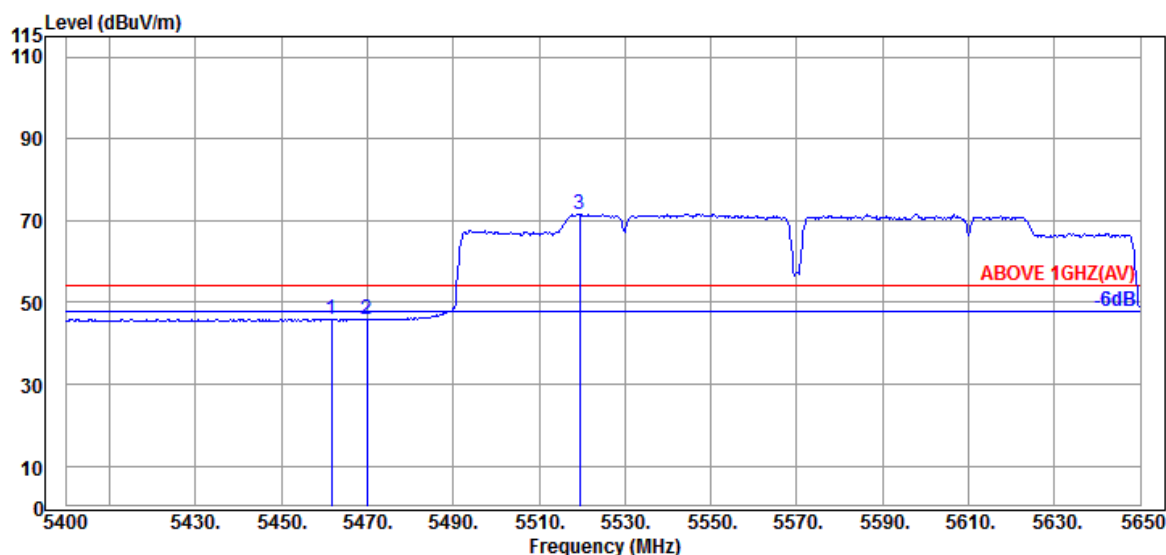


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5461.750                 | 34.50                 | 10.91           | 34.24                  | 34.78             | 45.95                   | 54.00           | 8.05        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 34.61             | 45.75                   | 54.00           | 8.25        | Average  |
| @ 5519.500               | 34.37                 | 10.93           | 34.24                  | 60.59             | 71.65                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C         |
|      |                 | Frequency  | TX 5570MHz |

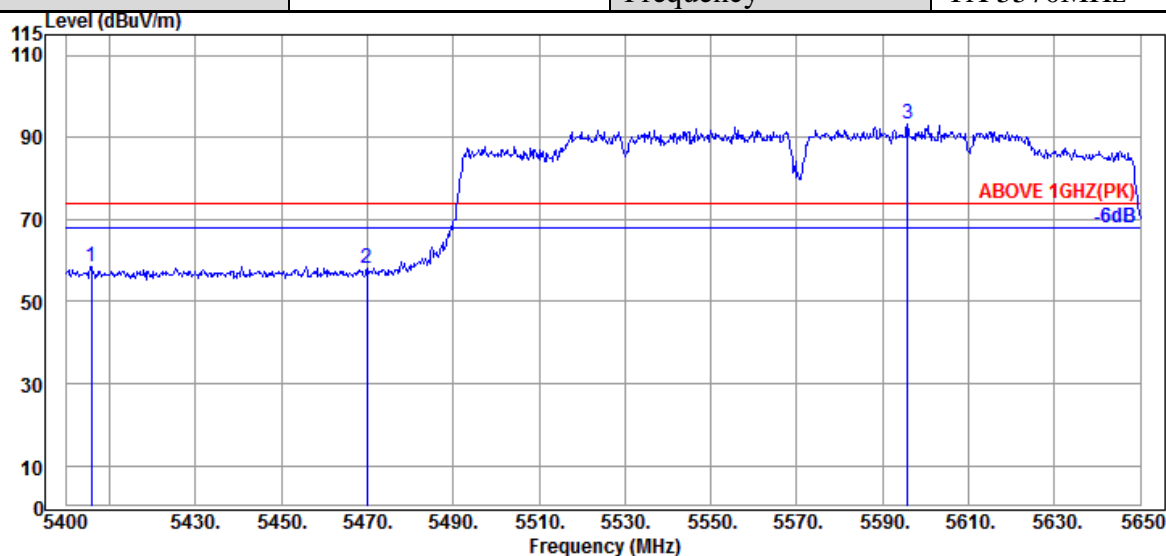

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5405.750                 | 34.65                 | 10.87           | 34.26                  | 47.40             | 58.66                   | 74.00           | 15.34       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 46.82             | 57.96                   | 74.00           | 16.04       | Peak     |
| @ 5595.750               | 34.40                 | 10.97           | 34.27                  | 82.15             | 93.25                   | ---             | ---         | Peak     |

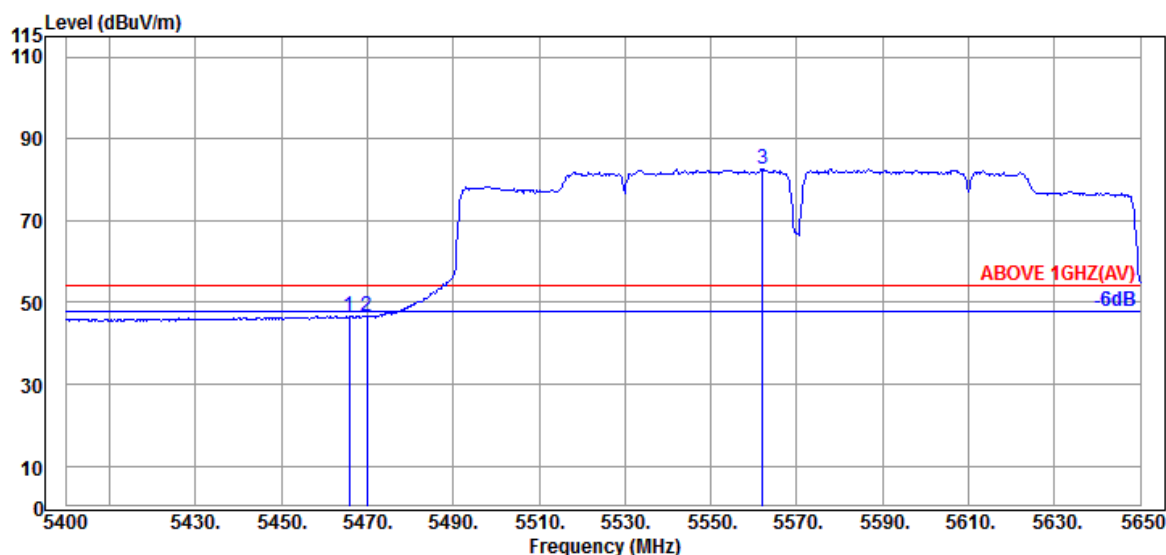

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.750                 | 34.47                 | 10.91           | 34.24                  | 35.43             | 46.57                   | 54.00           | 7.43        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 35.44             | 46.58                   | 54.00           | 7.42        | Average  |
| @ 5562.000               | 34.33                 | 10.95           | 34.26                  | 71.58             | 82.60                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

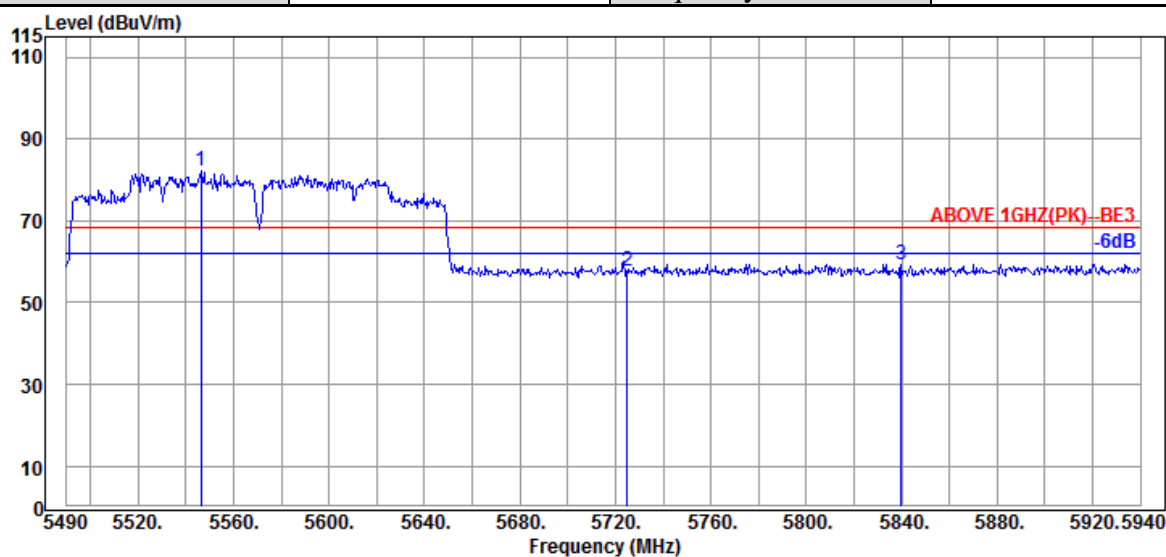

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5546.250                 | 34.30                 | 10.95           | 34.25            | 71.03             | 82.03                   | ---             | ---         | Peak     |
|   | 5724.900                 | 34.67                 | 11.05           | 34.32            | 46.23             | 57.63                   | 68.20           | 10.57       | Peak     |
|   | 5839.650                 | 35.10                 | 11.10           | 34.38            | 47.57             | 59.39                   | 68.20           | 8.81        | Peak     |

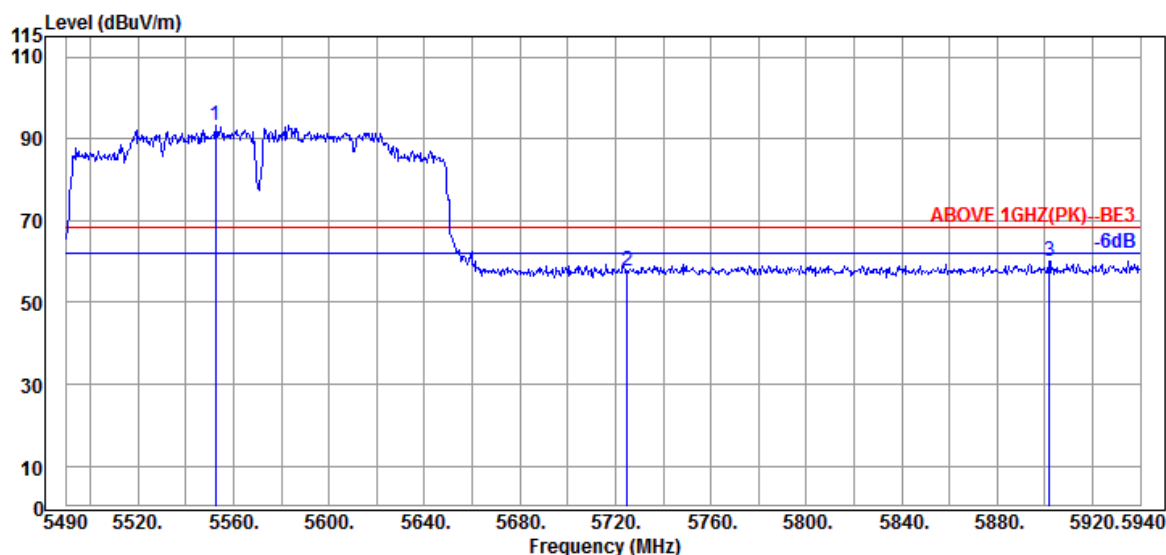


#### Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5552.550                 | 34.30                 | 10.95           | 34.26            | 82.25             | 93.24                   | ---             | ---         | Peak     |
|   | 5724.900                 | 34.67                 | 11.05           | 34.32            | 46.23             | 57.63                   | 68.20           | 10.57       | Peak     |
|   | 5901.750                 | 35.40                 | 11.14           | 34.40            | 47.98             | 60.12                   | 68.20           | 8.08        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | I          |
|      |               | Frequency  | TX 5180MHz |

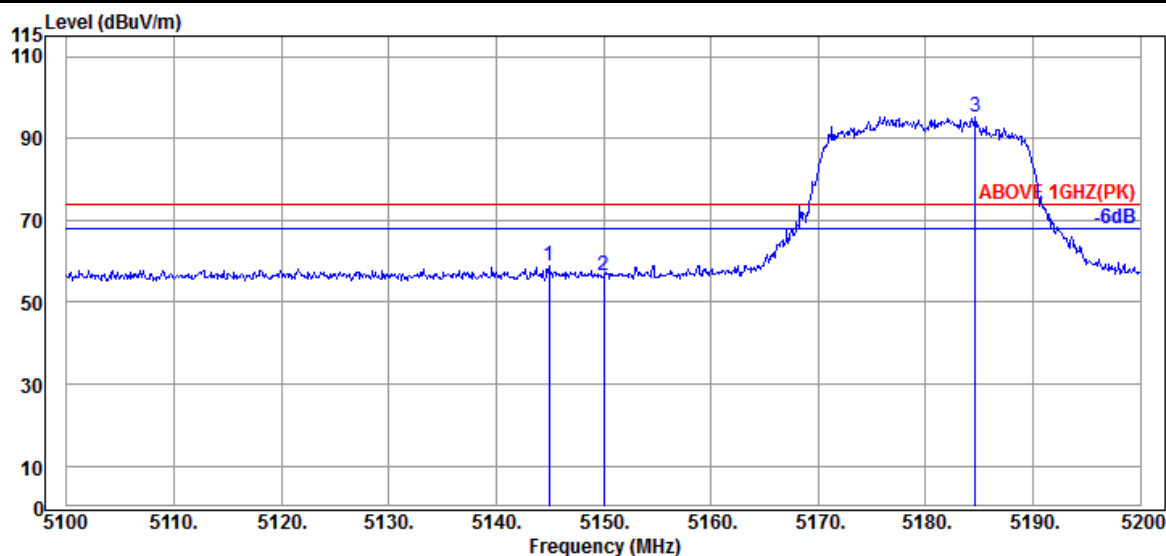

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5144.900                 | 34.20                 | 10.70           | 34.35                  | 48.37             | 58.92                   | 74.00           | 15.08       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 46.04             | 56.59                   | 74.00           | 17.41       | Peak     |
| @ 5184.600               | 34.20                 | 10.72           | 34.34                  | 84.68             | 95.26                   | ---             | ---         | Peak     |

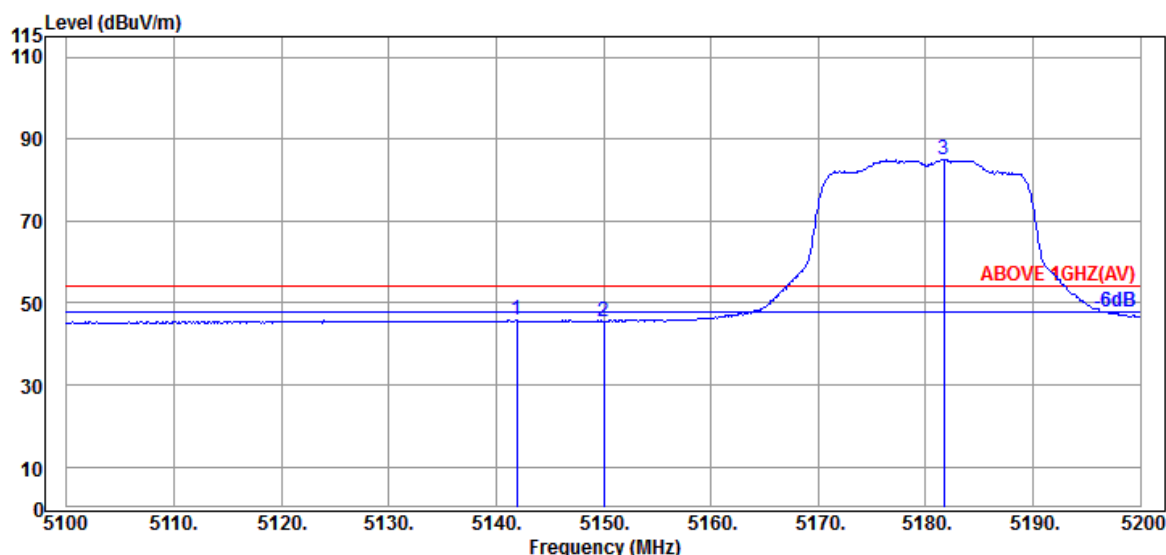

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5141.900                 | 34.20                 | 10.70           | 34.36                  | 35.28             | 45.82                   | 54.00           | 8.18        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 35.05             | 45.60                   | 54.00           | 8.40        | Average  |
| @ 5181.700               | 34.20                 | 10.72           | 34.34                  | 74.38             | 84.96                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | I          |
|      |               | Frequency  | TX 5180MHz |

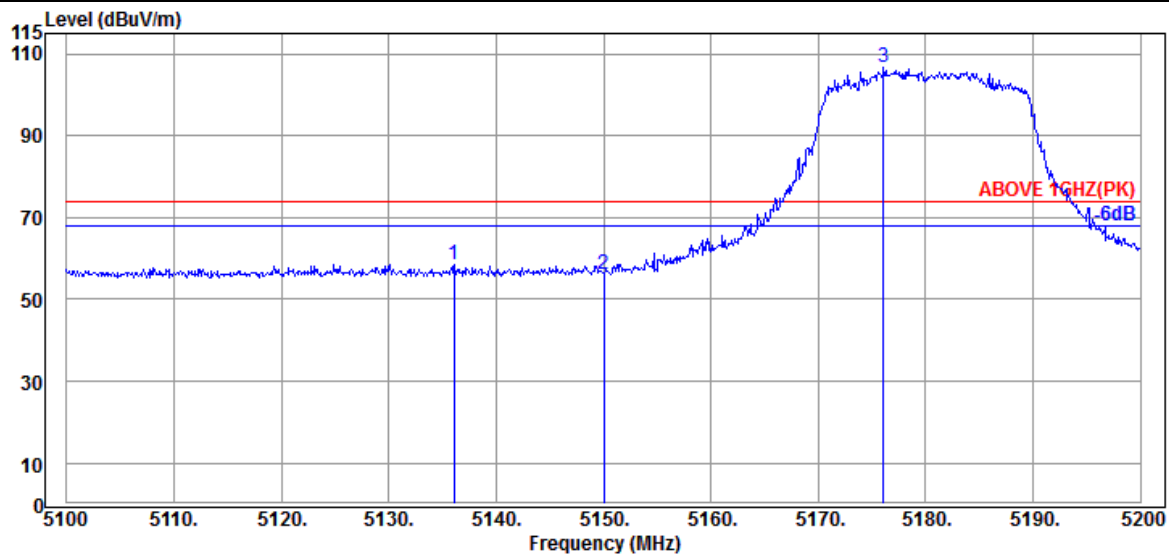

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5136.100                 | 34.17                 | 10.70           | 34.36                  | 47.89             | 58.40                   | 74.00           | 15.60       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 45.58             | 56.13                   | 74.00           | 17.87       | Peak     |
| @ 5176.100               | 34.20                 | 10.72           | 34.34                  | 96.10             | 106.68                  | ---             | ---         | Peak     |

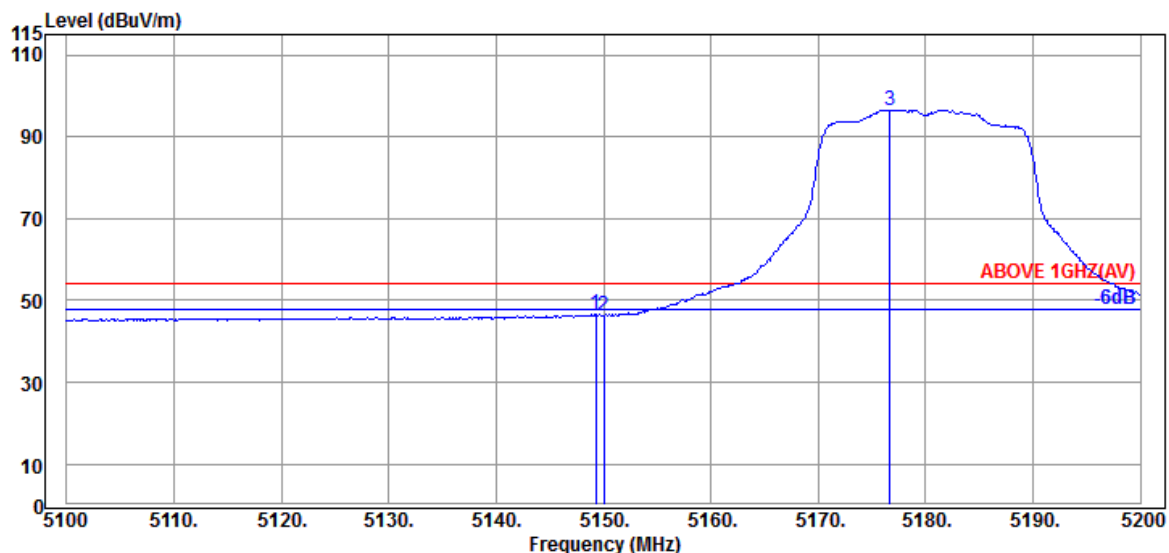

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.300                 | 34.20                 | 10.70           | 34.35                  | 35.96             | 46.51                   | 54.00           | 7.49        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 35.61             | 46.16                   | 54.00           | 7.84        | Average  |
| @ 5176.700               | 34.20                 | 10.72           | 34.34                  | 86.03             | 96.61                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5320MHz |

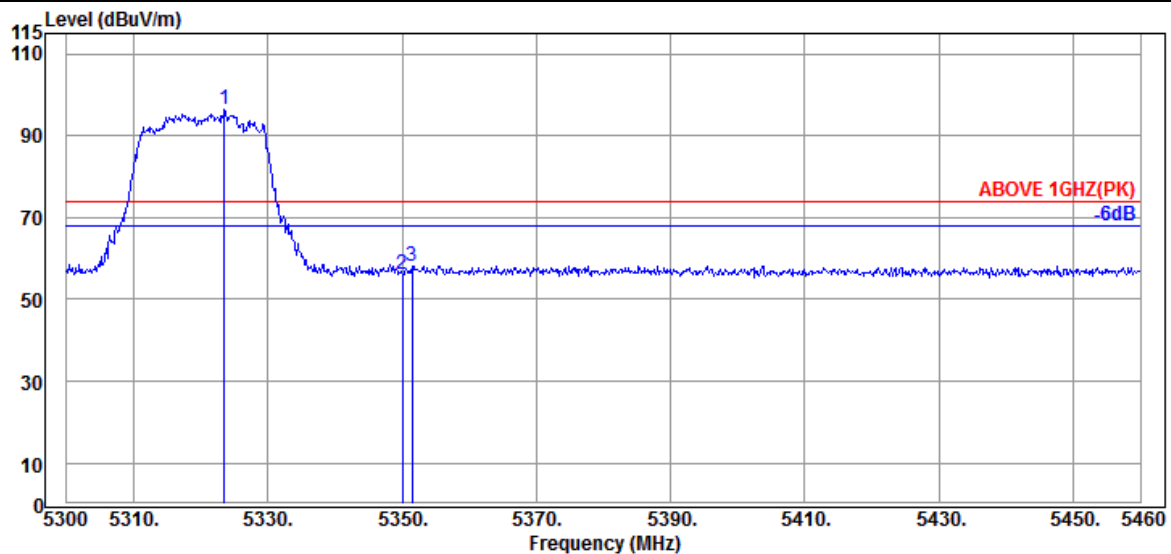

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5323.520                 | 34.57                 | 10.83           | 34.28                  | 85.43             | 96.55                   | ---             | ---         | Peak     |
|   | 5350.080                 | 34.60                 | 10.83           | 34.27                  | 45.00             | 56.16                   | 74.00           | 17.84       | Peak     |
|   | 5351.520                 | 34.60                 | 10.83           | 34.27                  | 47.03             | 58.19                   | 74.00           | 15.81       | Peak     |

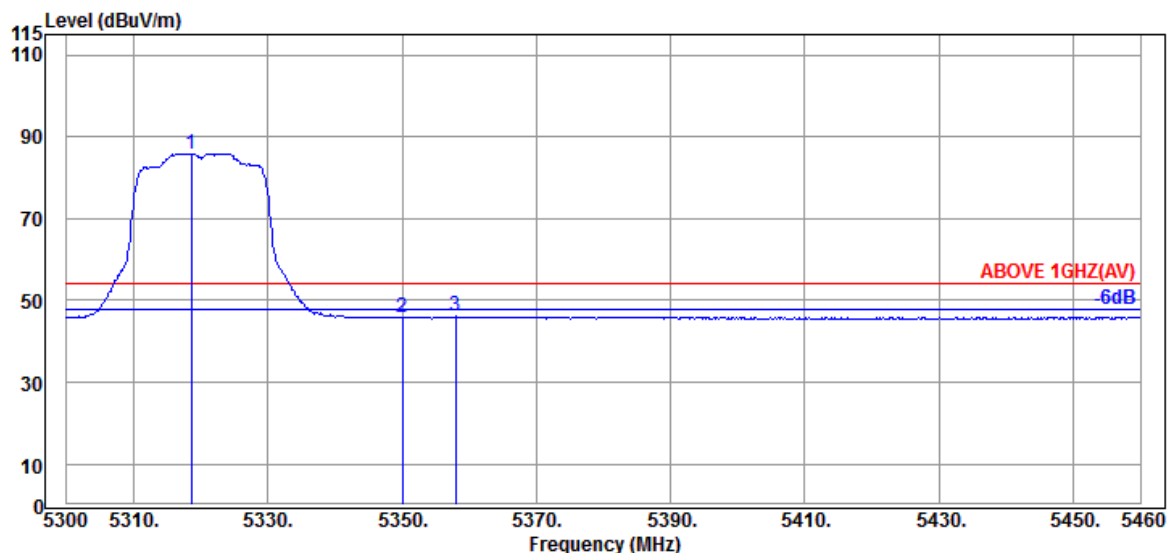

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5318.560                 | 34.53                 | 10.81           | 34.29                  | 74.87             | 85.92                   | ---             | ---         | Average  |
|   | 5350.080                 | 34.60                 | 10.83           | 34.27                  | 34.77             | 45.93                   | 54.00           | 8.07        | Average  |
|   | 5357.920                 | 34.63                 | 10.85           | 34.27                  | 34.86             | 46.07                   | 54.00           | 7.93        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5320MHz |

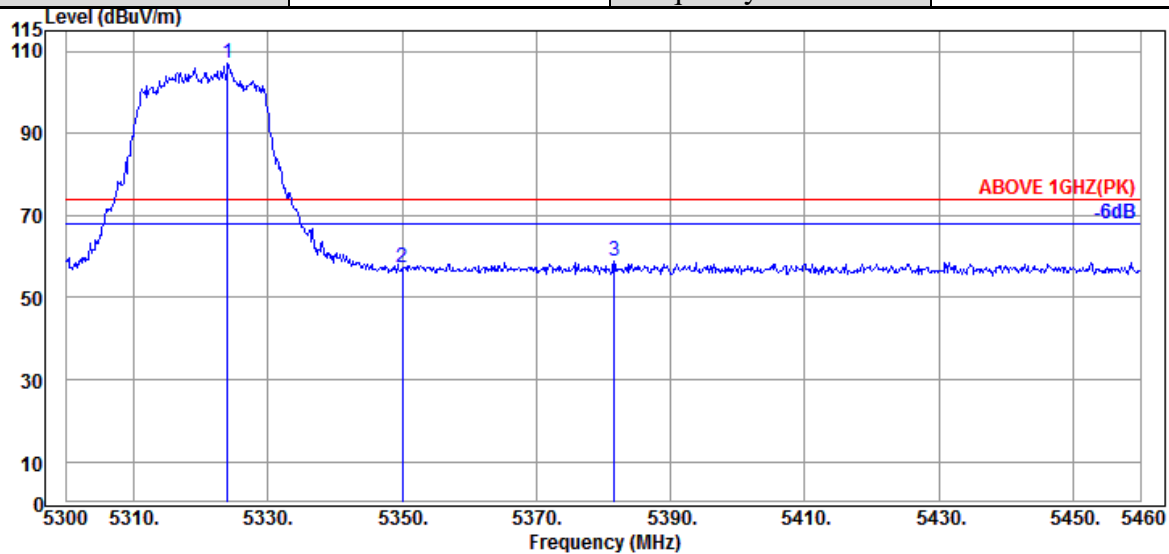

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5324.000               | 34.57                 | 10.83           | 34.28                  | 96.15             | 107.27                  | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 46.13             | 57.29                   | 74.00           | 16.71       | Peak     |
| 5381.600                 | 34.67                 | 10.85           | 34.27                  | 47.70             | 58.95                   | 74.00           | 15.05       | Peak     |

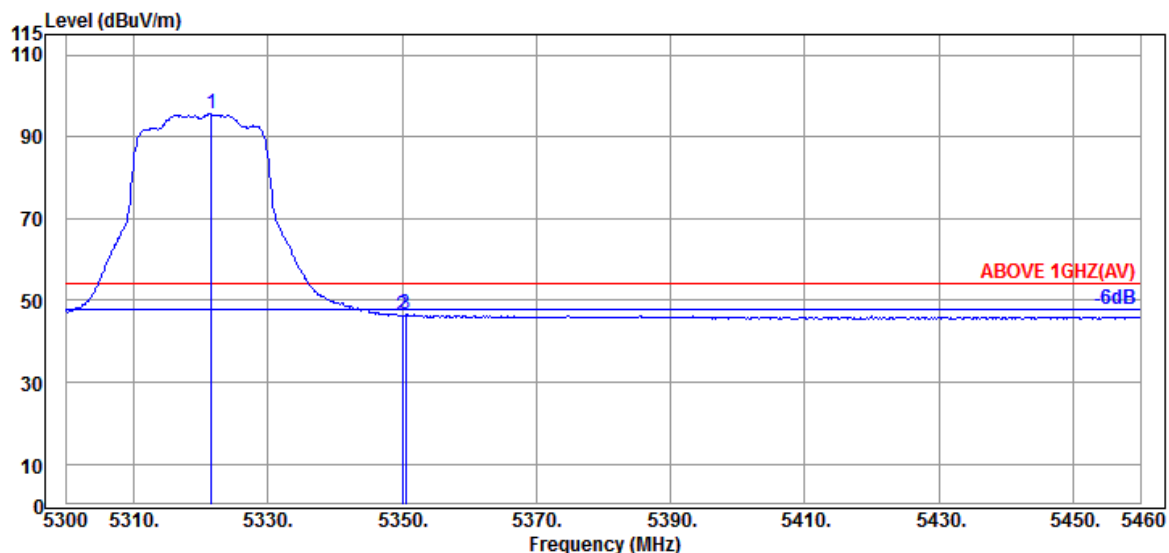

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5321.600               | 34.53                 | 10.83           | 34.29                  | 84.45             | 95.52                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 35.13             | 46.29                   | 54.00           | 7.71        | Average  |
| 5350.560                 | 34.60                 | 10.83           | 34.27                  | 35.33             | 46.49                   | 54.00           | 7.51        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5500MHz |

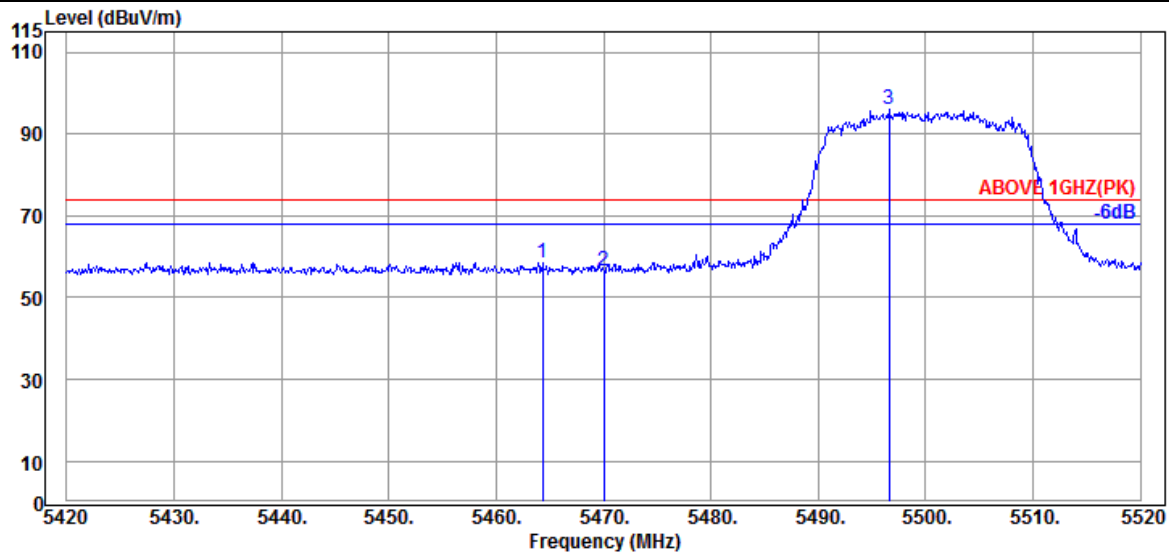

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5464.300                 | 34.47                 | 10.91           | 34.24                  | 47.45             | 58.59                   | 74.00           | 15.41       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 45.48             | 56.62                   | 74.00           | 17.38       | Peak     |
| @ 5496.600               | 34.40                 | 10.93           | 34.23                  | 85.12             | 96.22                   | ---             | ---         | Peak     |

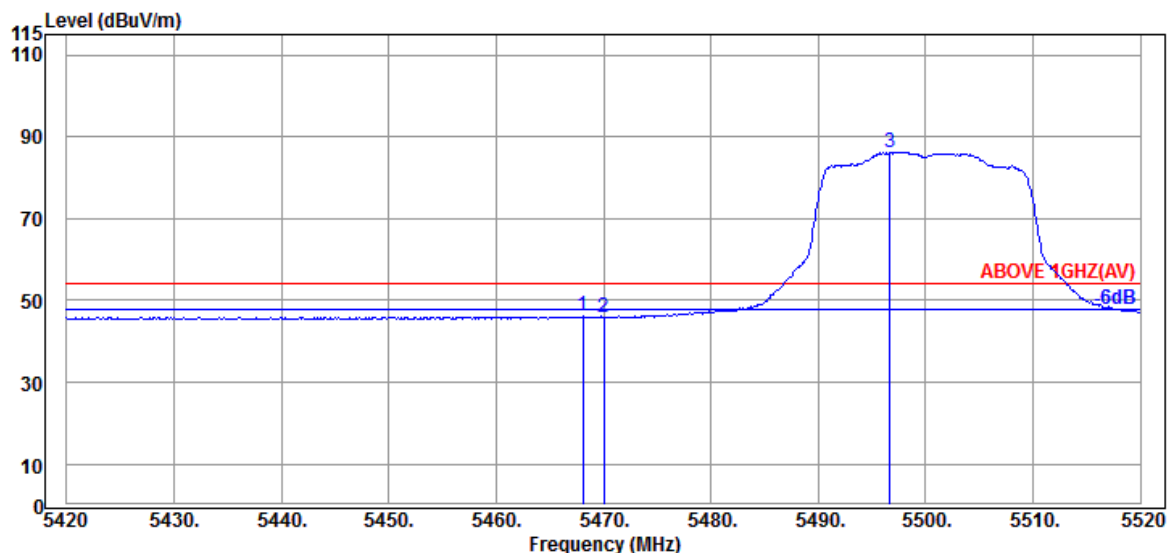


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.100                 | 34.47                 | 10.91           | 34.24                  | 34.95             | 46.09                   | 54.00           | 7.91        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 34.73             | 45.87                   | 54.00           | 8.13        | Average  |
| @ 5496.700               | 34.40                 | 10.93           | 34.23                  | 75.15             | 86.25                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5500MHz |

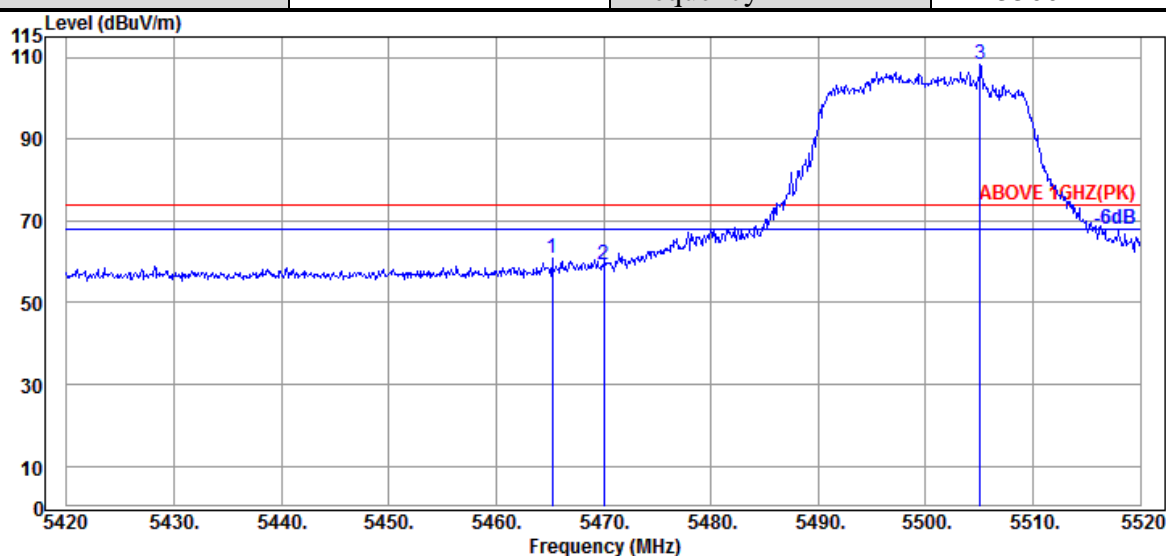

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.200                 | 34.47                 | 10.91           | 34.24                  | 49.66             | 60.80                   | 74.00           | 13.20       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 47.95             | 59.09                   | 74.00           | 14.91       | Peak     |
| @ 5505.100               | 34.40                 | 10.93           | 34.24                  | 97.01             | 108.10                  | ---             | ---         | Peak     |

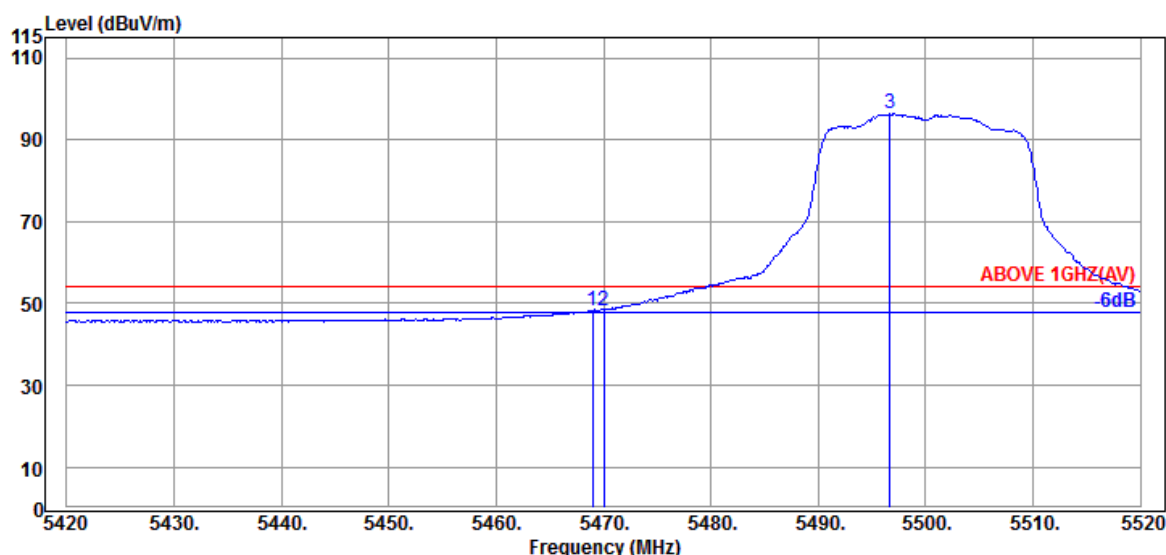

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.000                 | 34.47                 | 10.91           | 34.24                  | 37.11             | 48.25                   | 54.00           | 5.75        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 37.21             | 48.35                   | 54.00           | 5.65        | Average  |
| @ 5496.700               | 34.40                 | 10.93           | 34.23                  | 85.22             | 96.32                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5700MHz |

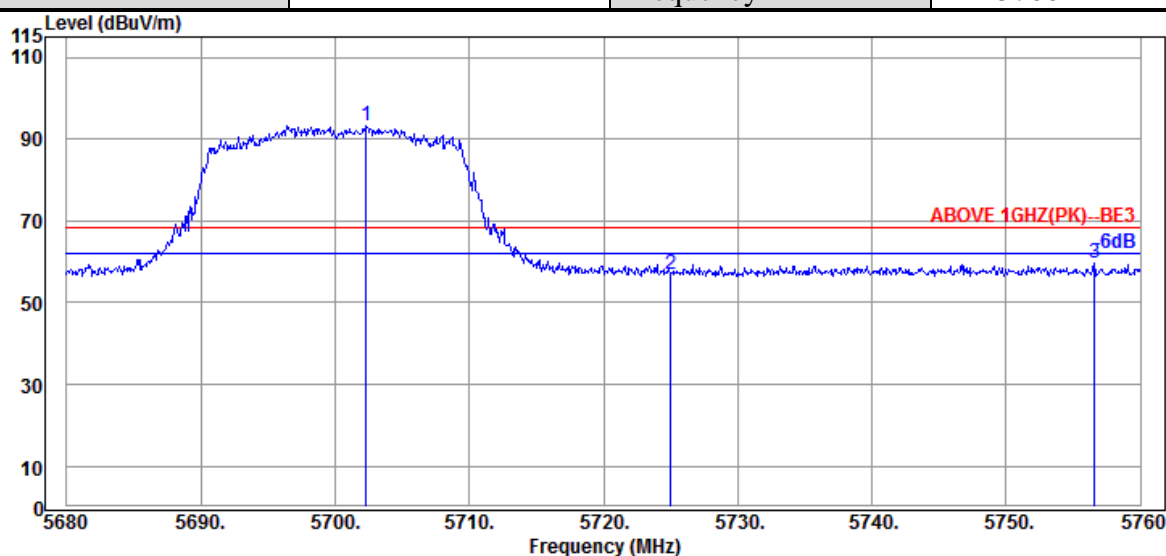

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5702.320               | 34.40                 | 11.03           | 34.31                  | 82.15             | 93.27                   | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32                  | 45.64             | 57.04                   | 68.20           | 11.16       | Peak     |
| 5756.560                 | 34.87                 | 11.06           | 34.35                  | 48.05             | 59.63                   | 68.20           | 8.57        | Peak     |

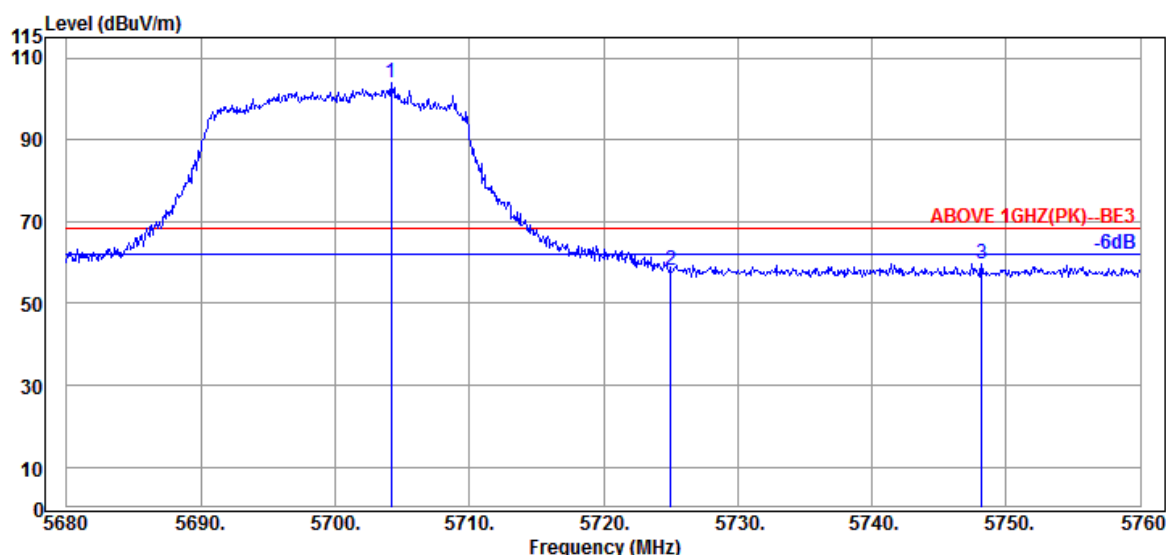

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5704.160               | 34.40                 | 11.03           | 34.31                  | 92.87             | 103.99                  | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32                  | 46.86             | 58.26                   | 68.20           | 9.94        | Peak     |
| 5748.160                 | 34.80                 | 11.06           | 34.33                  | 48.25             | 59.78                   | 68.20           | 8.42        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5720MHz |

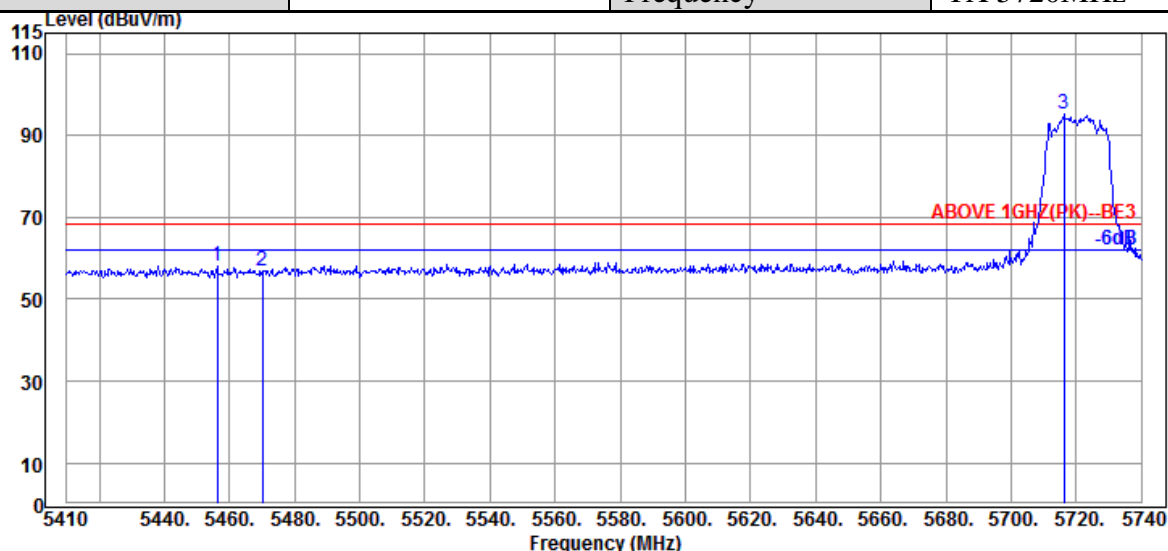

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5456.200                 | 34.50                 | 10.89           | 34.24                  | 46.94             | 58.09                   | 68.20           | 10.11       | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24                  | 45.89             | 57.03                   | 68.20           | 11.17       | Peak     |
| @ 5716.240               | 34.53                 | 11.05           | 34.32                  | 84.13             | 95.39                   | ---             | ---         | Peak     |

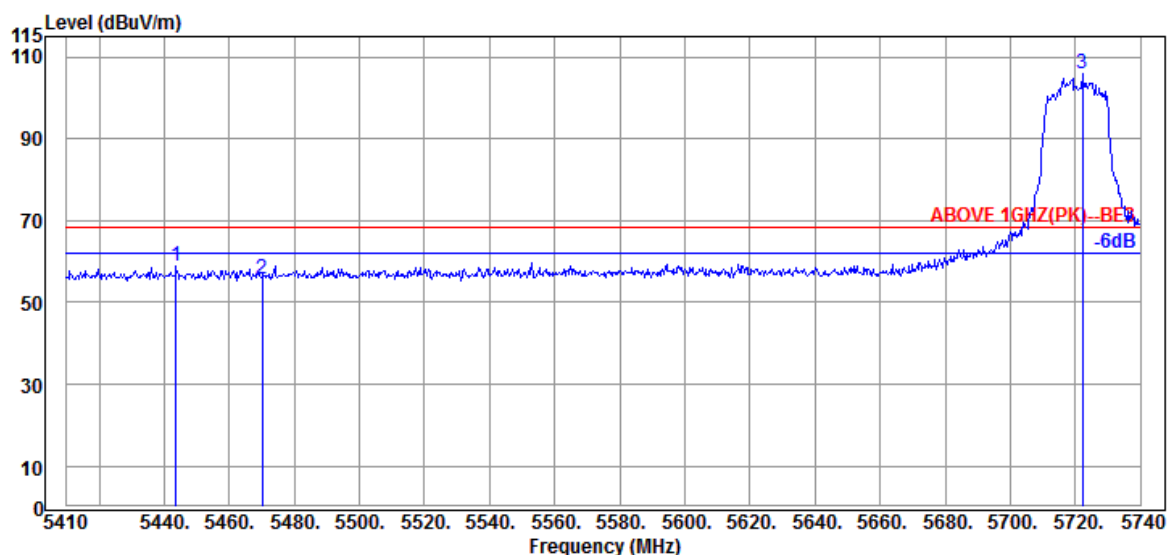

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5443.660                 | 34.55                 | 10.89           | 34.25                  | 47.53             | 58.72                   | 68.20           | 9.48        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24                  | 44.76             | 55.90                   | 68.20           | 12.30       | Peak     |
| @ 5722.180               | 34.67                 | 11.05           | 34.32                  | 94.58             | 105.98                  | ---             | ---         | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5720MHz |

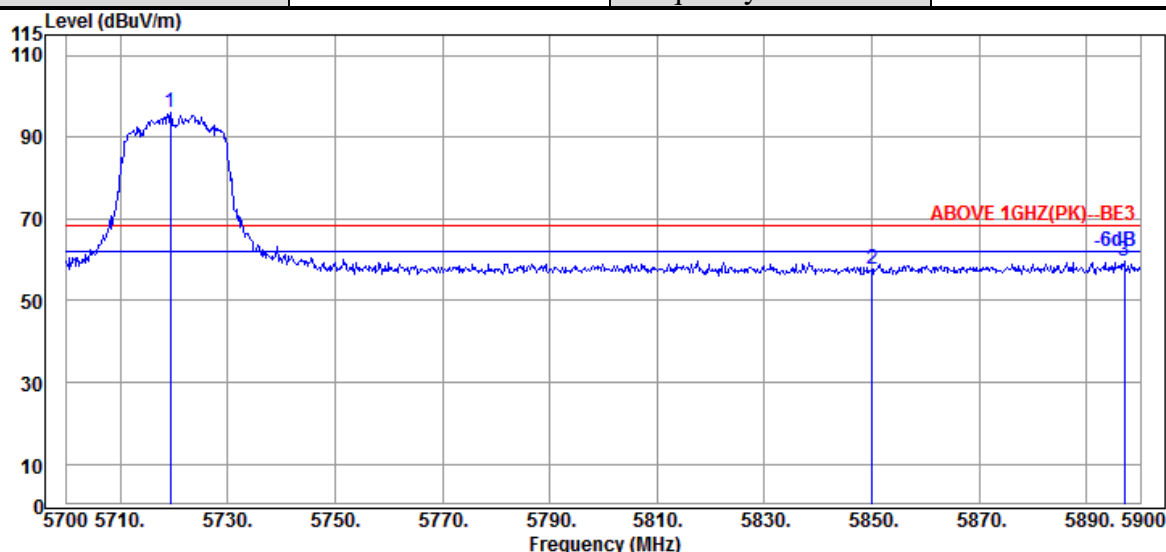

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5719.400               | 34.53                 | 11.05           | 34.32            | 84.63             | 95.89                   | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38            | 45.94             | 57.76                   | 68.20           | 10.44       | Peak     |
| 5897.000                 | 35.40                 | 11.14           | 34.40            | 47.51             | 59.65                   | 68.20           | 8.55        | Peak     |

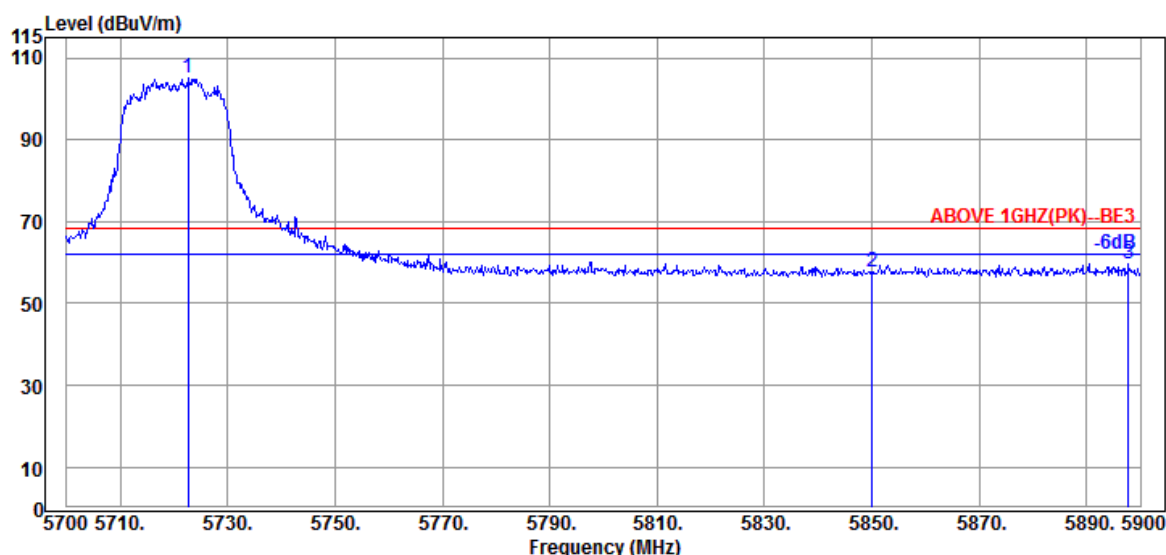

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5722.600               | 34.67                 | 11.05           | 34.32            | 93.72             | 105.12                  | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38            | 45.74             | 57.56                   | 68.20           | 10.64       | Peak     |
| 5897.800                 | 35.40                 | 11.14           | 34.40            | 47.50             | 59.64                   | 68.20           | 8.56        | Peak     |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ac-HE20 | U-NII Band | III        |
|      |               | Frequency  | TX 5745MHz |

#### Antenna at Horizontal Polarization

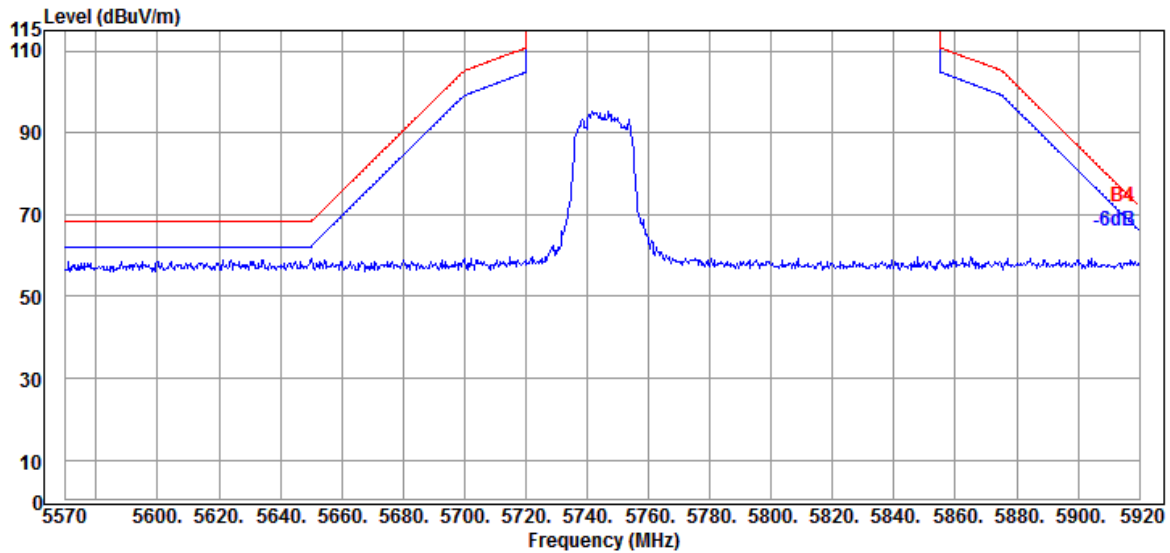

#### Antenna at Vertical Polarization

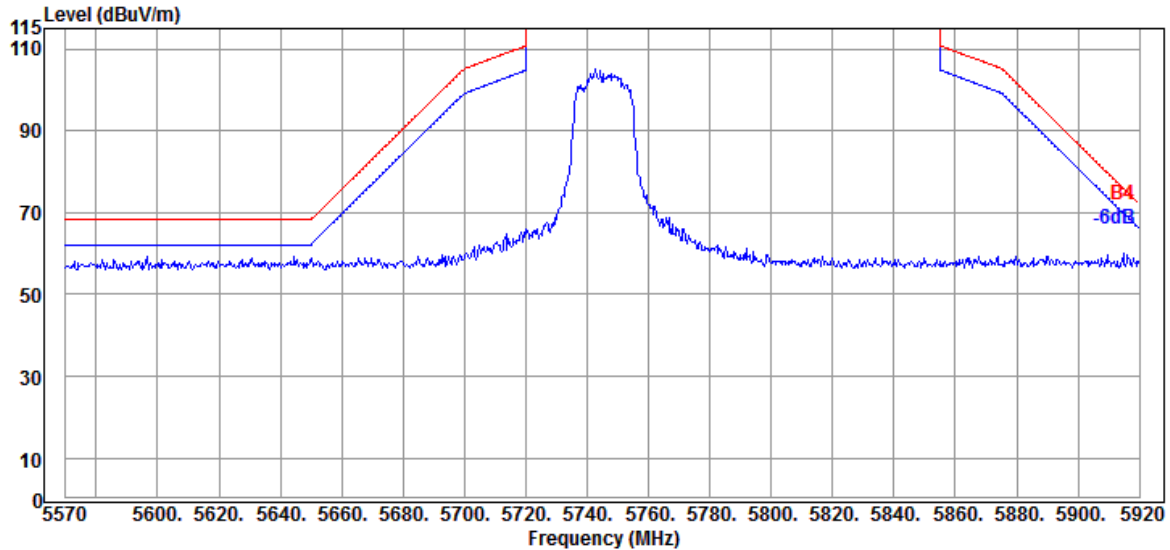


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ac-HE20 | U-NII Band | III        |
|      |               | Frequency  | TX 5825MHz |

#### Antenna at Horizontal Polarization

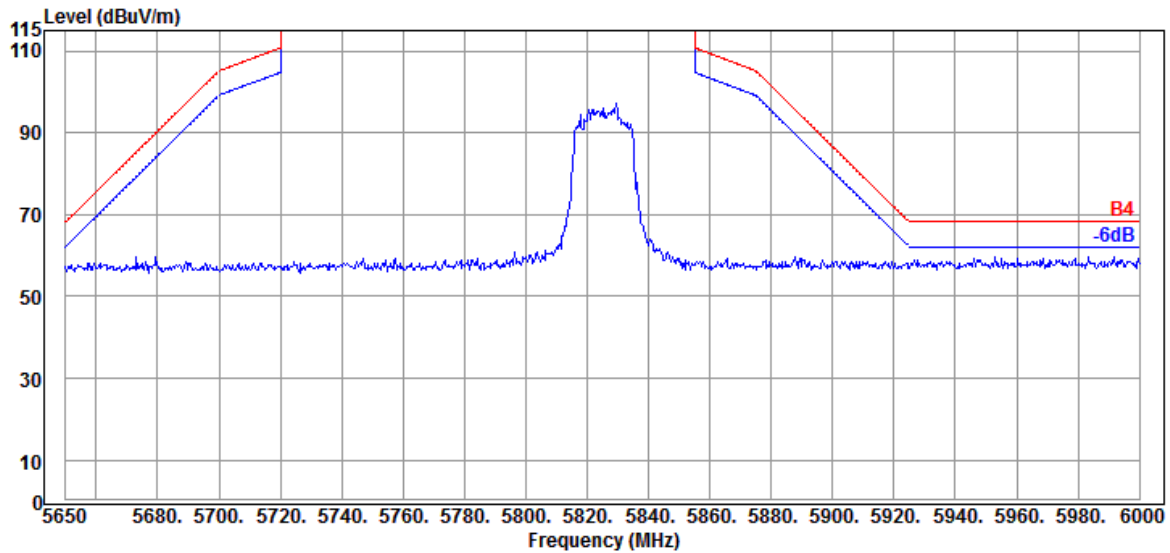


#### Antenna at Vertical Polarization

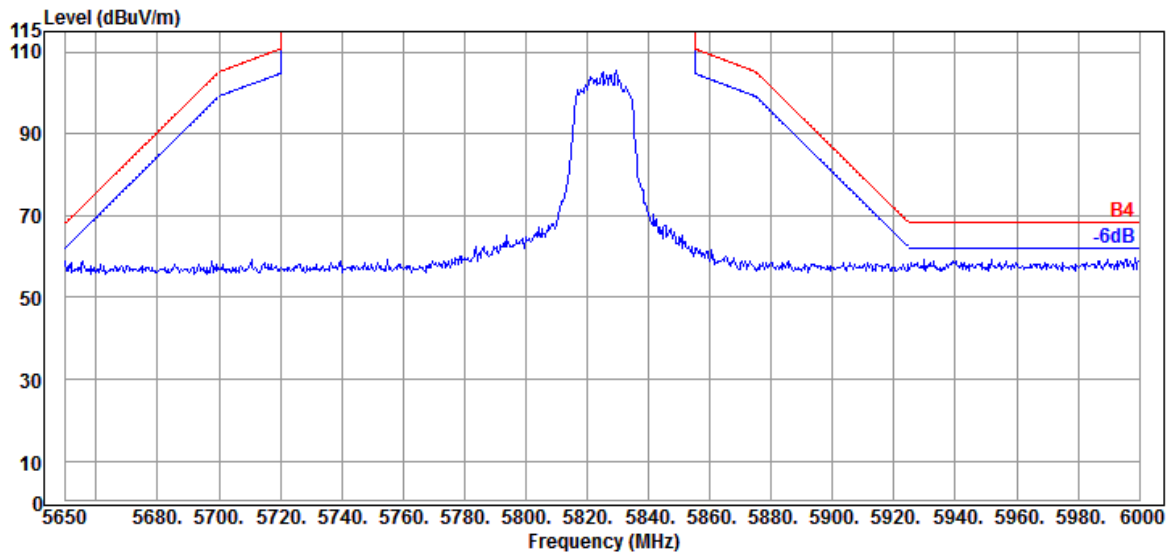

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | I          |
|      |               | Frequency  | TX 5190MHz |

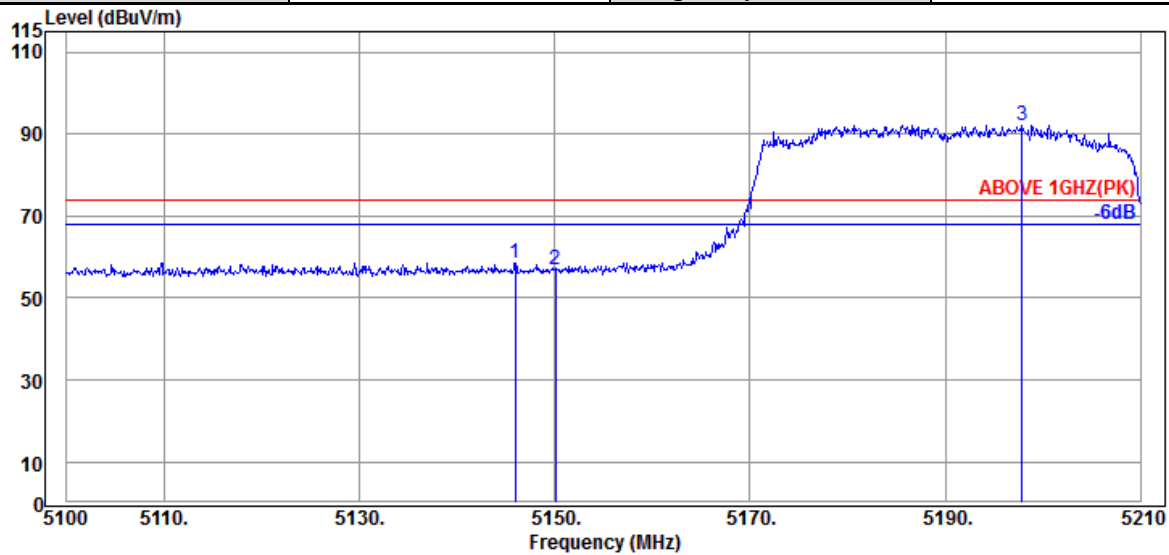

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.980                 | 34.20                 | 10.70           | 34.35            | 48.08             | 58.63                   | 74.00           | 15.37       | Peak     |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 46.18             | 56.73                   | 74.00           | 17.27       | Peak     |
| @ 5197.900               | 34.20                 | 10.74           | 34.33            | 81.64             | 92.25                   | ---             | ---         | Peak     |

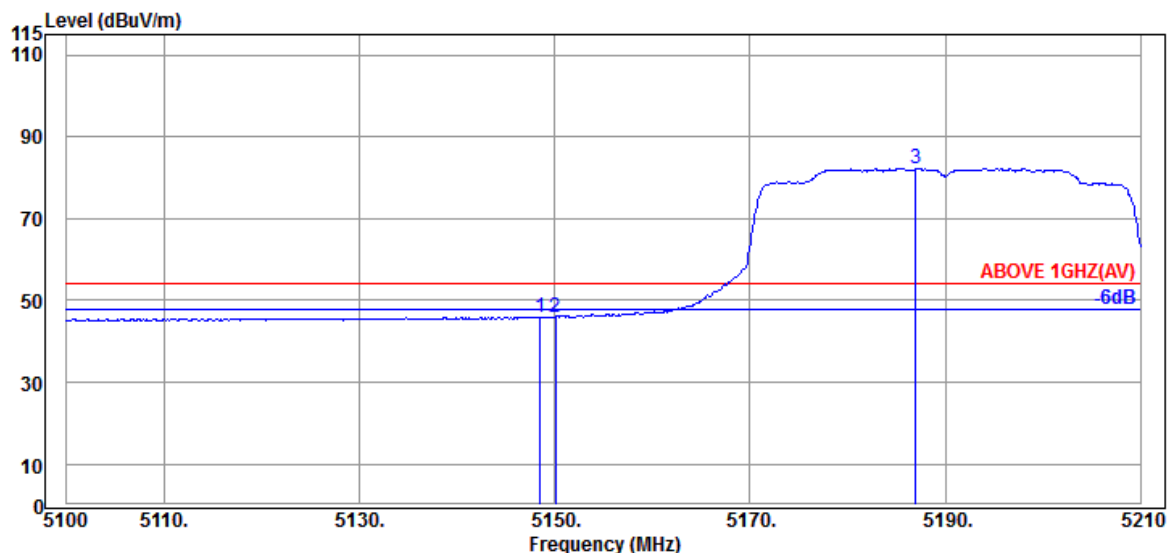


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.510                 | 34.20                 | 10.70           | 34.35            | 35.46             | 46.01                   | 54.00           | 7.99        | Average  |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 35.36             | 45.91                   | 54.00           | 8.09        | Average  |
| @ 5187.010               | 34.20                 | 10.72           | 34.34            | 71.81             | 82.39                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | I          |
|      |               | Frequency  | TX 5190MHz |

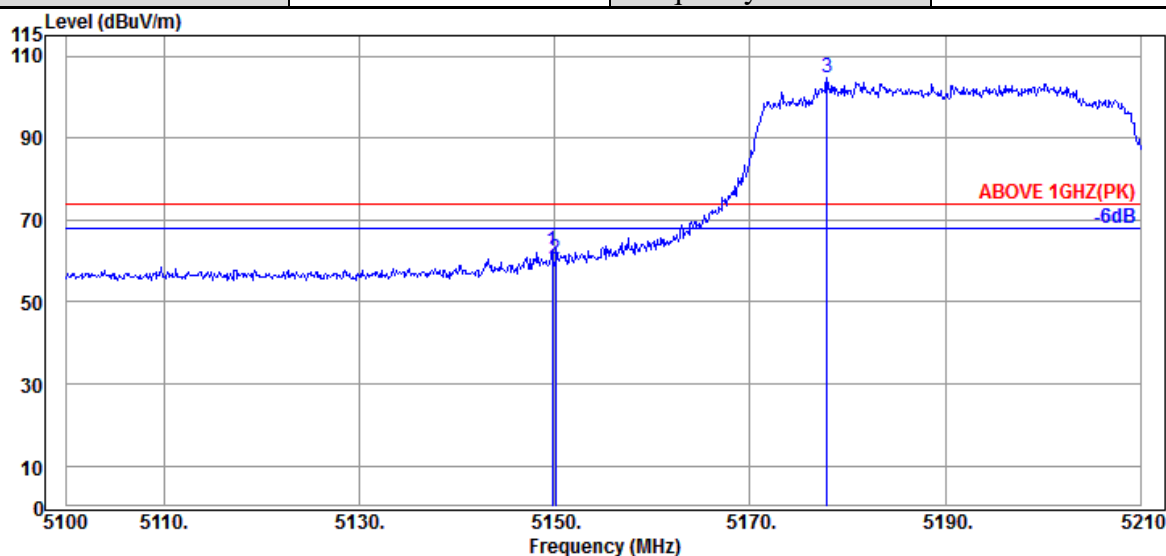

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720                 | 34.20                 | 10.70           | 34.35            | 51.72             | 62.27                   | 74.00           | 11.73       | Peak     |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 49.86             | 60.41                   | 74.00           | 13.59       | Peak     |
| @ 5177.880               | 34.20                 | 10.72           | 34.34            | 94.08             | 104.66                  | ---             | ---         | Peak     |

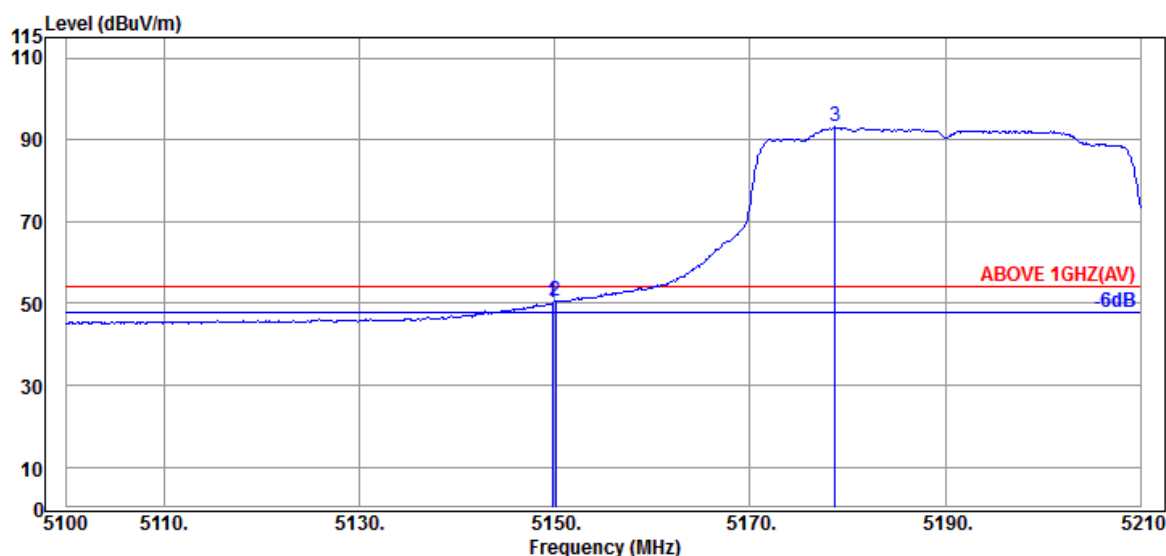

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720                 | 34.20                 | 10.70           | 34.35            | 39.55             | 50.10                   | 54.00           | 3.90        | Average  |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 39.91             | 50.46                   | 54.00           | 3.54        | Average  |
| @ 5178.760               | 34.20                 | 10.72           | 34.34            | 82.55             | 93.13                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5310MHz |

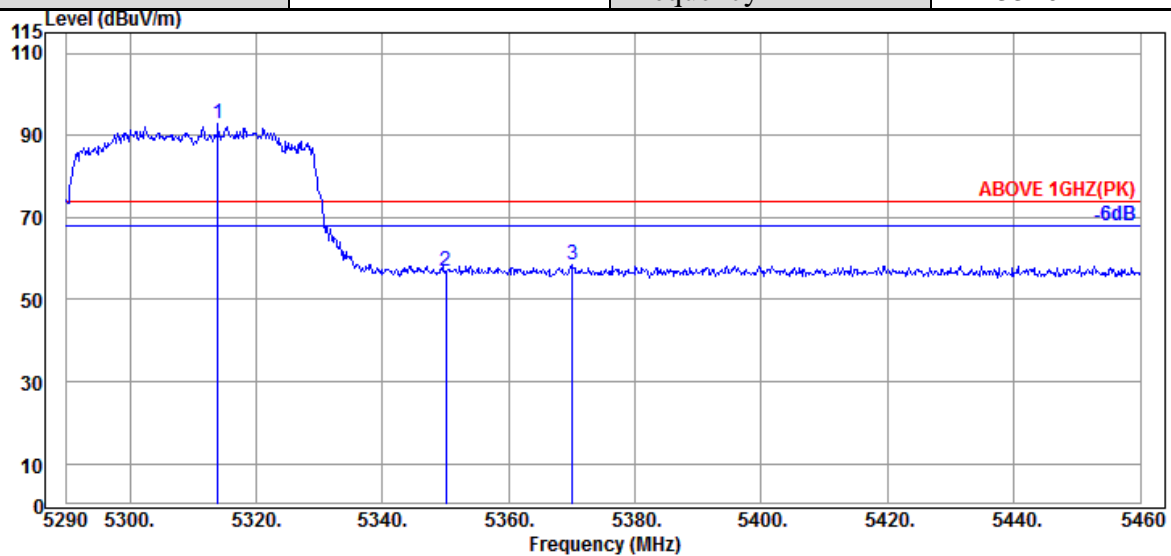

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5313.970               | 34.53                 | 10.81           | 34.29                  | 81.82             | 92.87                   | ---             | ---         | Peak     |
| 5350.010                 | 34.60                 | 10.83           | 34.27                  | 45.69             | 56.85                   | 74.00           | 17.15       | Peak     |
| 5370.070                 | 34.67                 | 10.85           | 34.27                  | 47.09             | 58.34                   | 74.00           | 15.66       | Peak     |

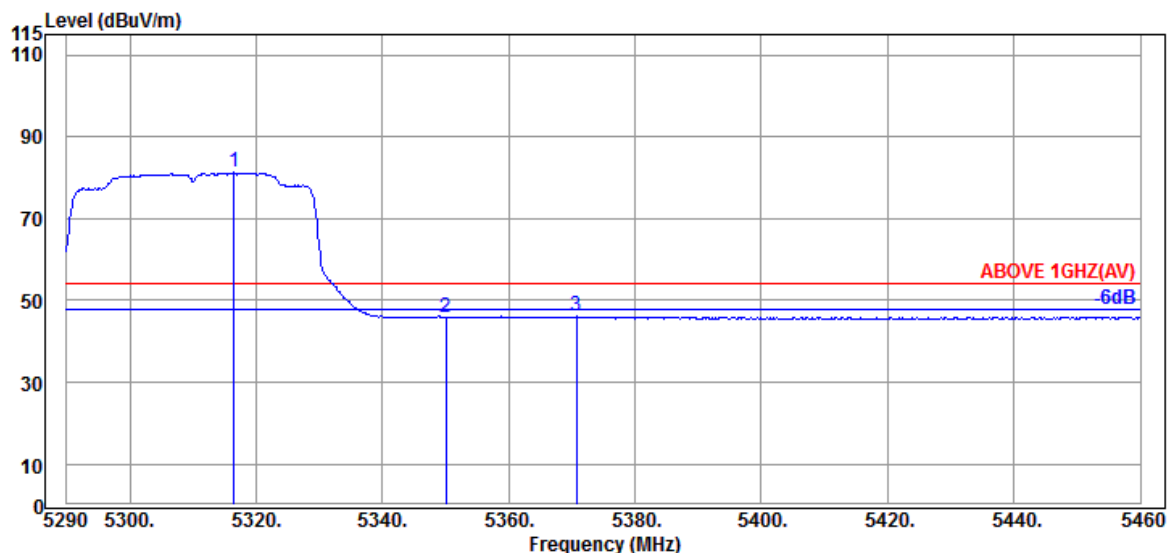

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.520               | 34.53                 | 10.81           | 34.29                  | 70.18             | 81.23                   | ---             | ---         | Average  |
| 5350.010                 | 34.60                 | 10.83           | 34.27                  | 34.57             | 45.73                   | 54.00           | 8.27        | Average  |
| 5370.750                 | 34.67                 | 10.85           | 34.27                  | 34.83             | 46.08                   | 54.00           | 7.92        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5310MHz |

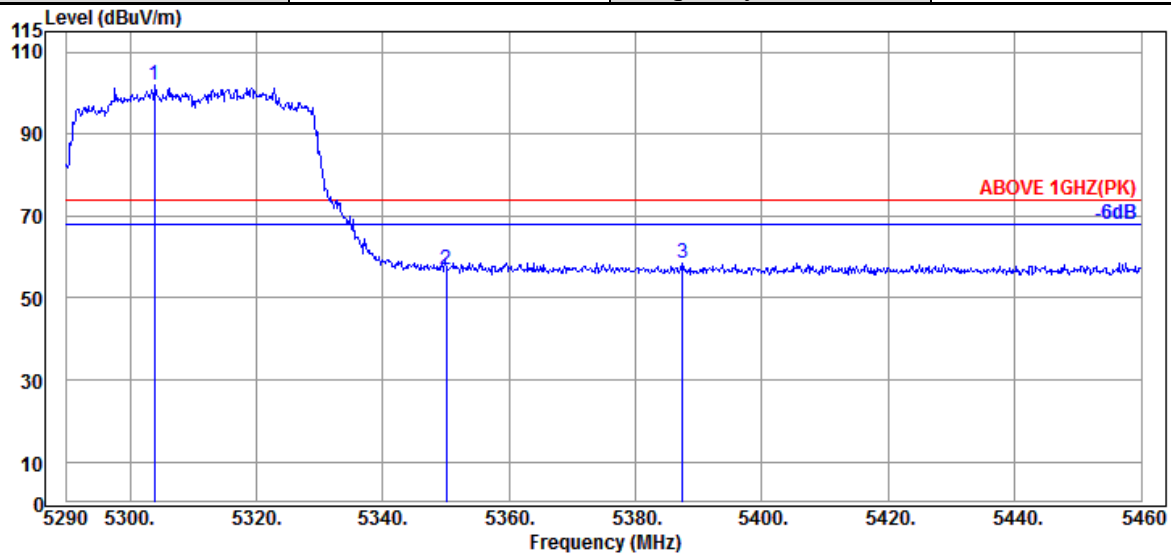

#### Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5303.940                 | 34.50                 | 10.81           | 34.29            | 91.13             | 102.15                  | ---             | ---         | Peak     |
|   | 5350.010                 | 34.60                 | 10.83           | 34.27            | 45.89             | 57.05                   | 74.00           | 16.95       | Peak     |
|   | 5387.410                 | 34.70                 | 10.85           | 34.27            | 47.38             | 58.66                   | 74.00           | 15.34       | Peak     |

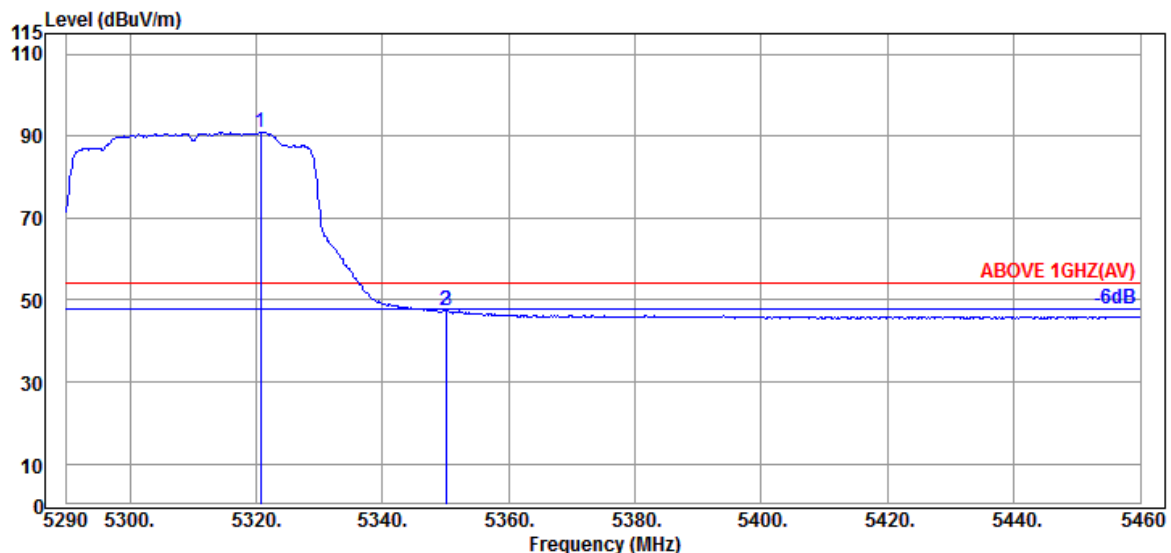

#### Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5320.770                 | 34.53                 | 10.81           | 34.29            | 79.80             | 90.85                   | ---             | ---         | Average  |
|   | 5350.010                 | 34.60                 | 10.83           | 34.27            | 36.18             | 47.34                   | 54.00           | 6.66        | Average  |
|   | 5350.180                 | 34.60                 | 10.83           | 34.27            | 36.21             | 47.37                   | 54.00           | 6.63        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5510MHz |

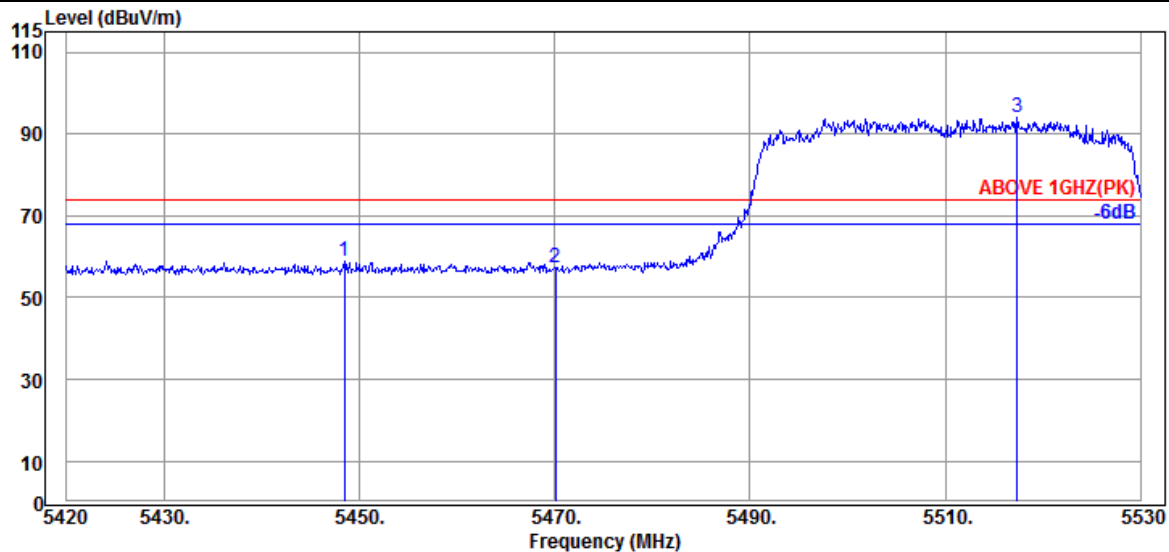

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5448.490                 | 34.50                 | 10.89           | 34.25            | 47.83             | 58.97                   | 74.00           | 15.03       | Peak     |
| 5470.050                 | 34.47                 | 10.91           | 34.24            | 46.01             | 57.15                   | 74.00           | 16.85       | Peak     |
| @ 5517.350               | 34.37                 | 10.93           | 34.24            | 83.13             | 94.19                   | ---             | ---         | Peak     |

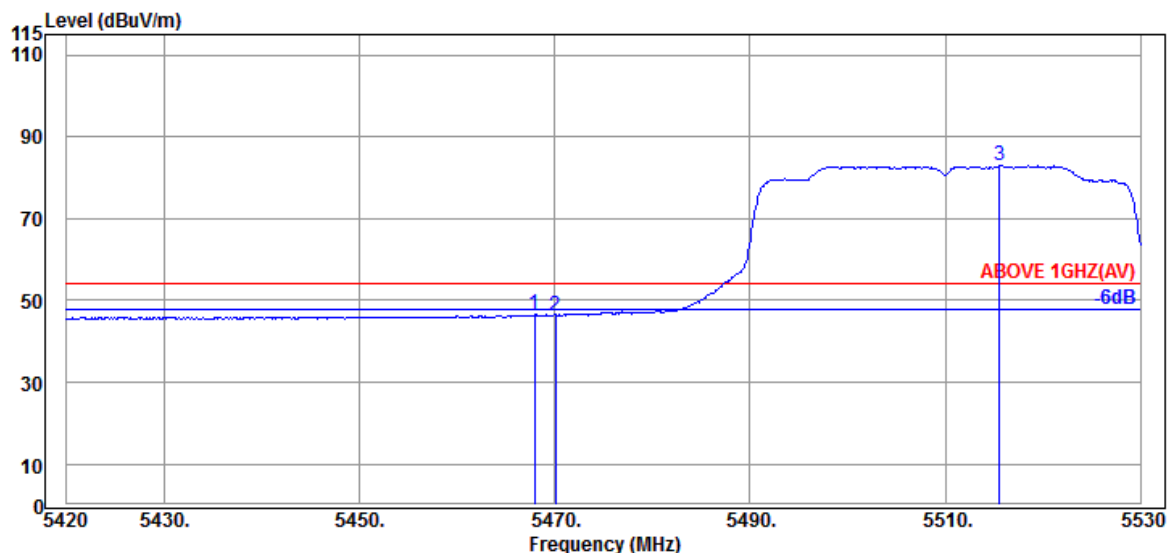


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.960                 | 34.47                 | 10.91           | 34.24            | 35.46             | 46.60                   | 54.00           | 7.40        | Average  |
| 5470.050                 | 34.47                 | 10.91           | 34.24            | 35.23             | 46.37                   | 54.00           | 7.63        | Average  |
| @ 5515.590               | 34.37                 | 10.93           | 34.24            | 71.86             | 82.92                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5510MHz |

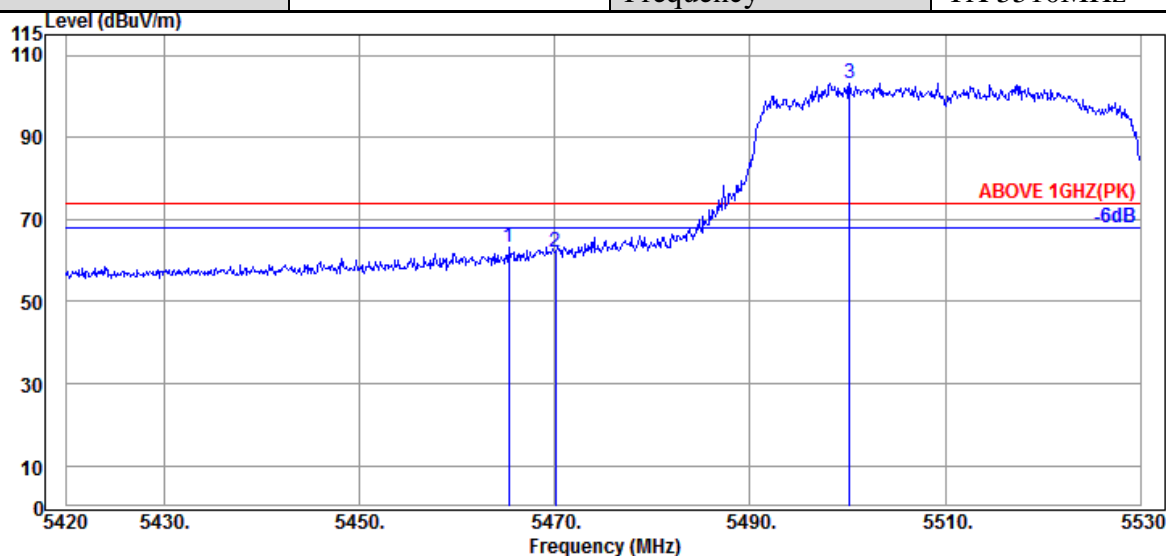

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.320                 | 34.47                 | 10.91           | 34.24                  | 52.00             | 63.14                   | 74.00           | 10.86       | Peak     |
| 5470.050                 | 34.47                 | 10.91           | 34.24                  | 50.81             | 61.95                   | 74.00           | 12.05       | Peak     |
| @ 5500.190               | 34.40                 | 10.93           | 34.23                  | 92.01             | 103.11                  | ---             | ---         | Peak     |

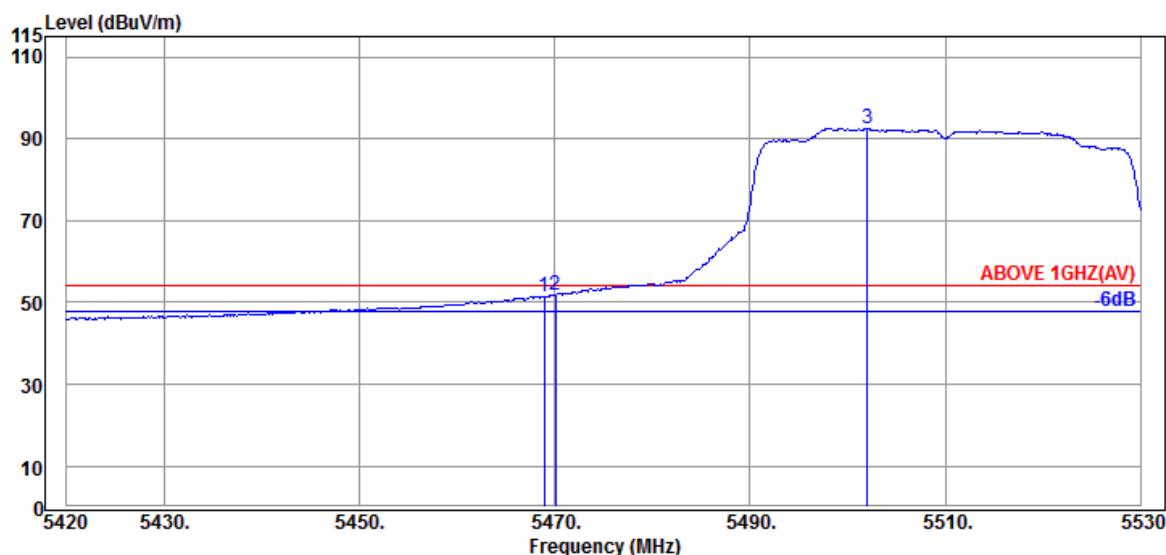

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.950                 | 34.47                 | 10.91           | 34.24                  | 40.30             | 51.44                   | 54.00           | 2.56        | Average  |
| 5470.050                 | 34.47                 | 10.91           | 34.24                  | 40.54             | 51.68                   | 54.00           | 2.32        | Average  |
| @ 5502.060               | 34.40                 | 10.93           | 34.24                  | 81.52             | 92.61                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5670MHz |

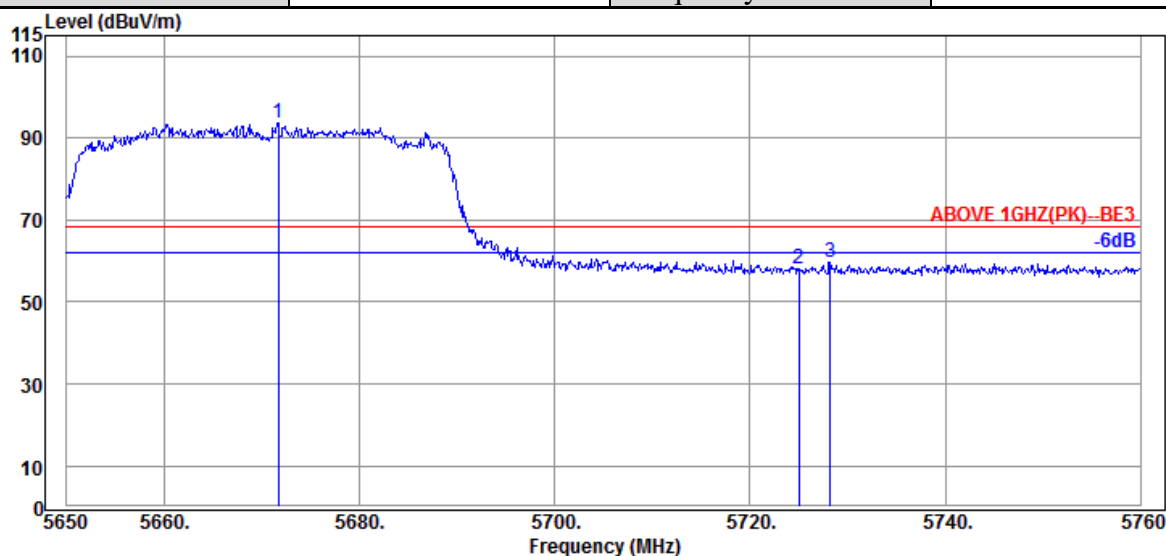

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5671.670               | 34.40                 | 11.01           | 34.30            | 82.62             | 93.73                   | ---             | ---         | Peak     |
| 5725.020                 | 34.67                 | 11.05           | 34.32            | 46.58             | 57.98                   | 68.20           | 10.22       | Peak     |
| 5728.210                 | 34.67                 | 11.05           | 34.32            | 48.33             | 59.73                   | 68.20           | 8.47        | Peak     |

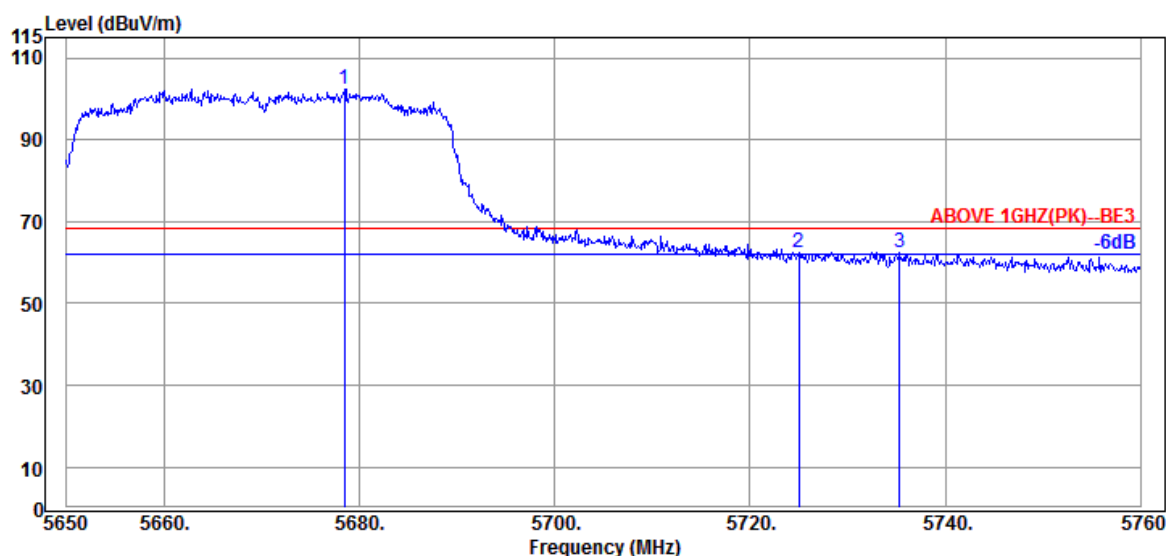

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5678.490               | 34.40                 | 11.03           | 34.30            | 91.37             | 102.50                  | ---             | ---         | Peak     |
| 5725.020                 | 34.67                 | 11.05           | 34.32            | 50.96             | 62.36                   | 68.20           | 5.84        | Peak     |
| 5735.360                 | 34.67                 | 11.05           | 34.33            | 51.22             | 62.61                   | 68.20           | 5.59        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5710MHz |

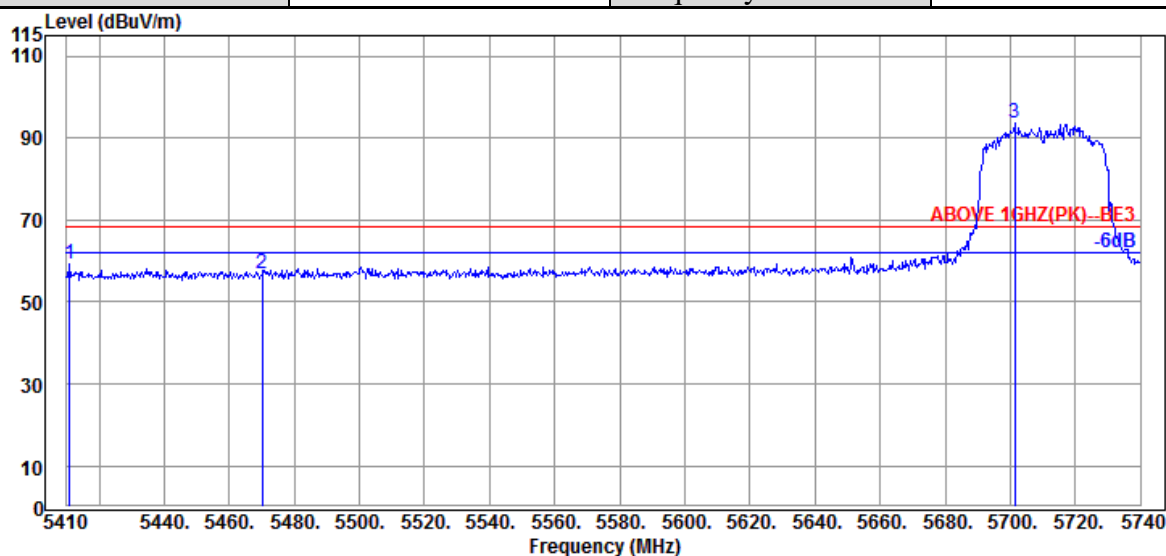

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5410.990                 | 34.65                 | 10.87           | 34.26            | 47.94             | 59.20                   | 68.20           | 9.00        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 45.87             | 57.01                   | 68.20           | 11.19       | Peak     |
| @ 5701.390               | 34.40                 | 11.03           | 34.31            | 82.43             | 93.55                   | ---             | ---         | Peak     |

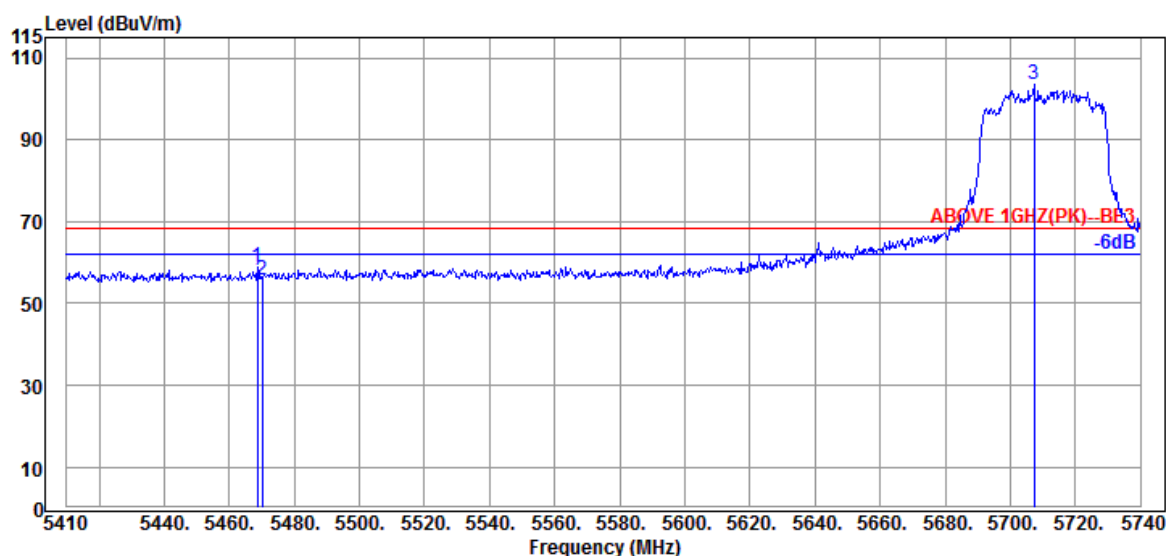

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.740                 | 34.47                 | 10.91           | 34.24            | 47.62             | 58.76                   | 68.20           | 9.44        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24            | 44.52             | 55.66                   | 68.20           | 12.54       | Peak     |
| @ 5707.330               | 34.53                 | 11.03           | 34.32            | 92.13             | 103.37                  | ---             | ---         | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5710MHz |

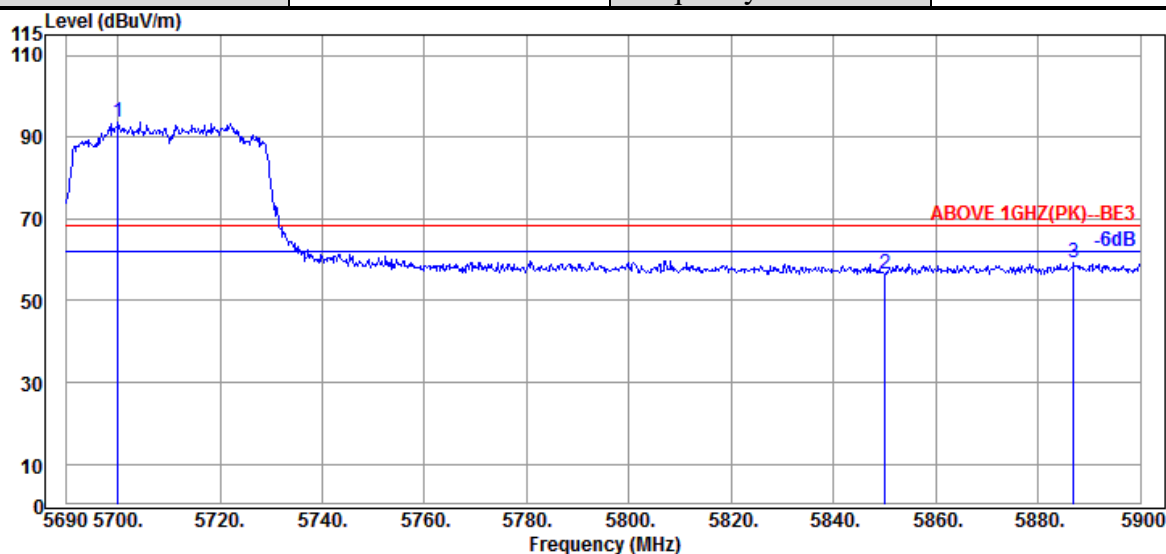

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5700.080               | 34.40                 | 11.03           | 34.31            | 82.36             | 93.48                   | ---             | ---         | Peak     |
| 5850.020                 | 35.10                 | 11.10           | 34.38            | 44.82             | 56.64                   | 68.20           | 11.56       | Peak     |
| 5886.980                 | 35.30                 | 11.12           | 34.40            | 47.26             | 59.28                   | 68.20           | 8.92        | Peak     |

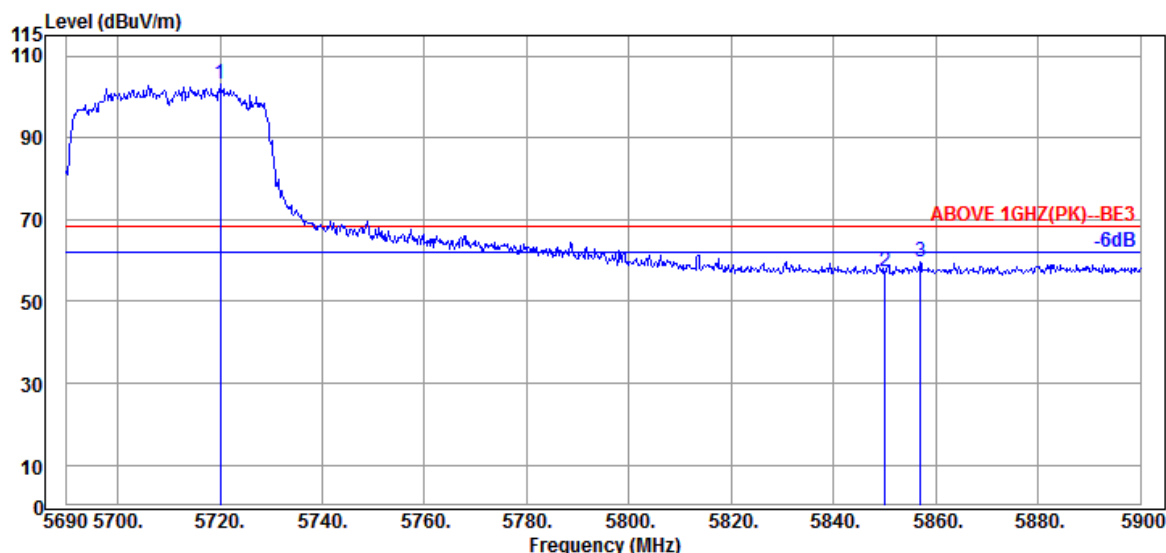

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5720.030               | 34.53                 | 11.05           | 34.32            | 91.92             | 103.18                  | ---             | ---         | Peak     |
| 5850.020                 | 35.10                 | 11.10           | 34.38            | 45.29             | 57.11                   | 68.20           | 11.09       | Peak     |
| 5856.950                 | 35.20                 | 11.10           | 34.38            | 47.61             | 59.53                   | 68.20           | 8.67        | Peak     |


Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | III        |
|      |               | Frequency  | TX 5755MHz |

#### Antenna at Horizontal Polarization

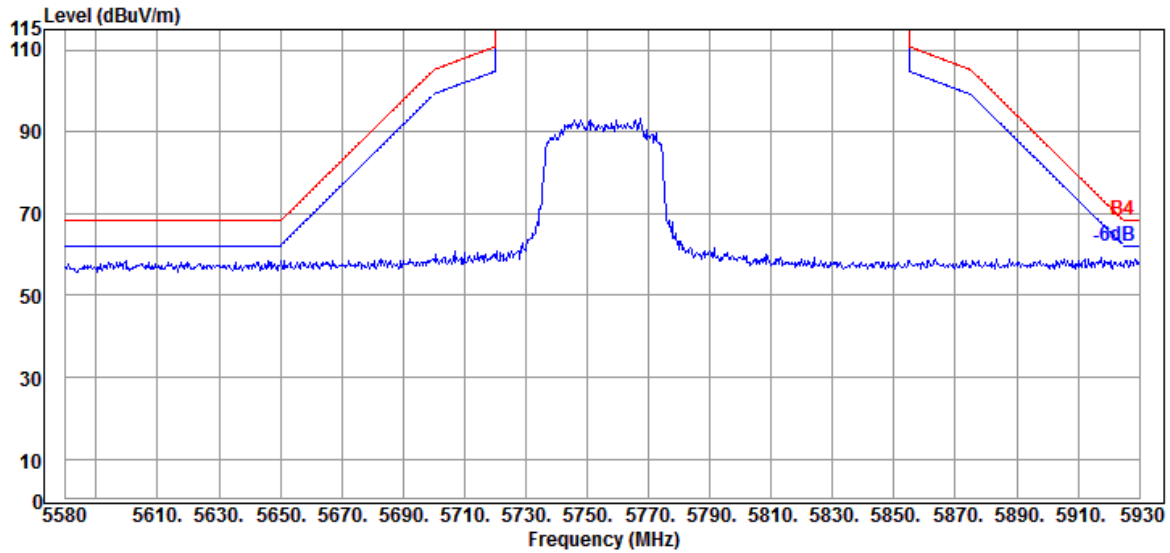

#### Antenna at Vertical Polarization

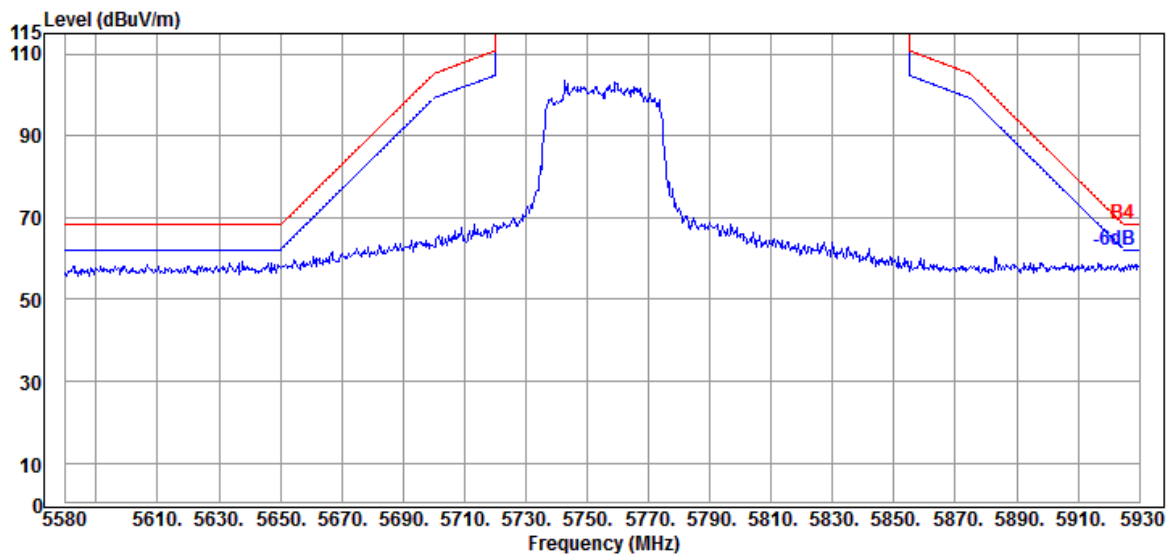


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | III        |
|      |               | Frequency  | TX 5795MHz |

### Antenna at Horizontal Polarization

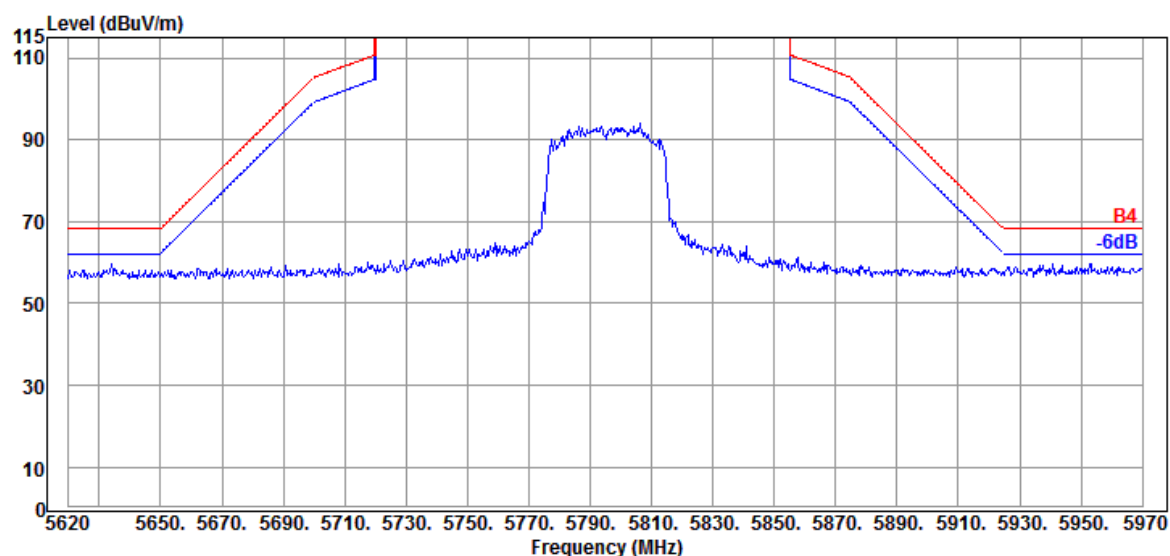


### Antenna at Vertical Polarization

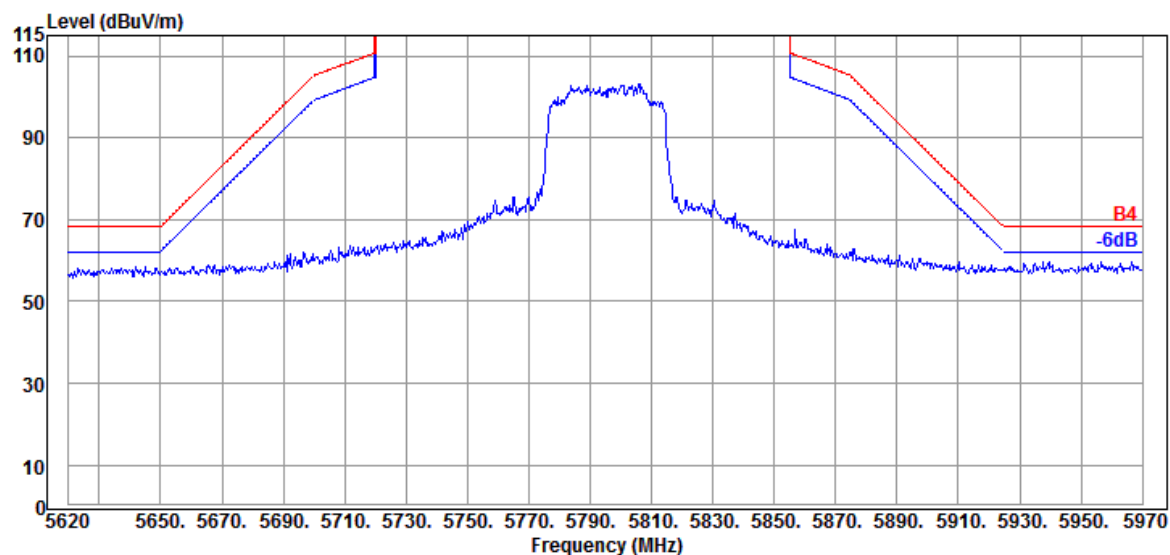

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | I          |
|      |               | Frequency  | TX 5210MHz |

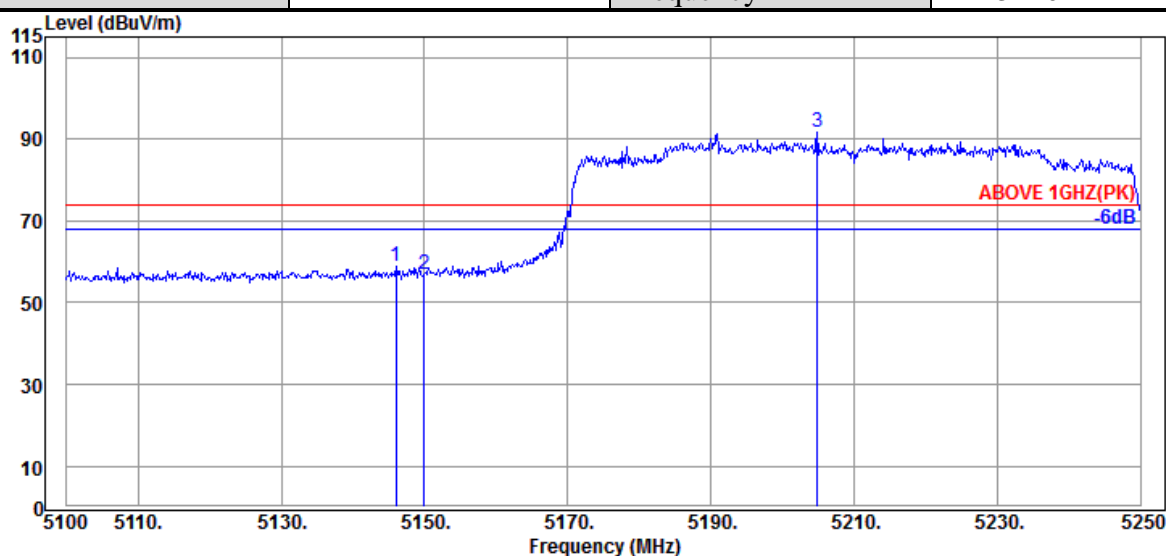

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.050                 | 34.20                 | 10.70           | 34.35                  | 48.29             | 58.84                   | 74.00           | 15.16       | Peak     |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 46.43             | 56.98                   | 74.00           | 17.02       | Peak     |
| @ 5204.850               | 34.25                 | 10.74           | 34.33                  | 81.09             | 91.75                   | ---             | ---         | Peak     |

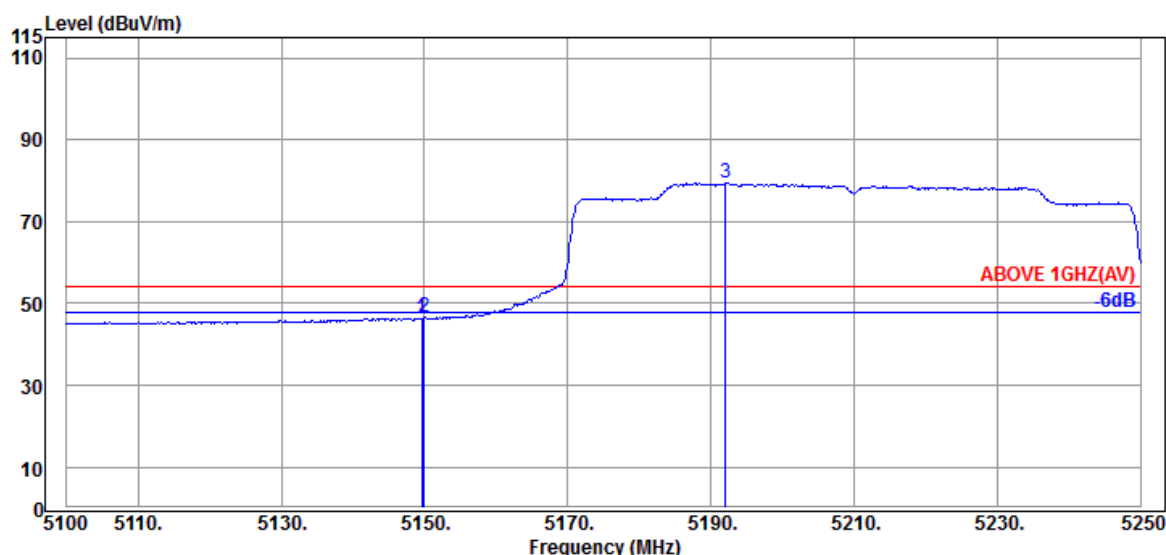

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.650                 | 34.20                 | 10.70           | 34.35                  | 35.85             | 46.40                   | 54.00           | 7.60        | Average  |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 36.03             | 46.58                   | 54.00           | 7.42        | Average  |
| @ 5192.100               | 34.20                 | 10.74           | 34.34                  | 68.91             | 79.51                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | I          |
|      |               | Frequency  | TX 5210MHz |

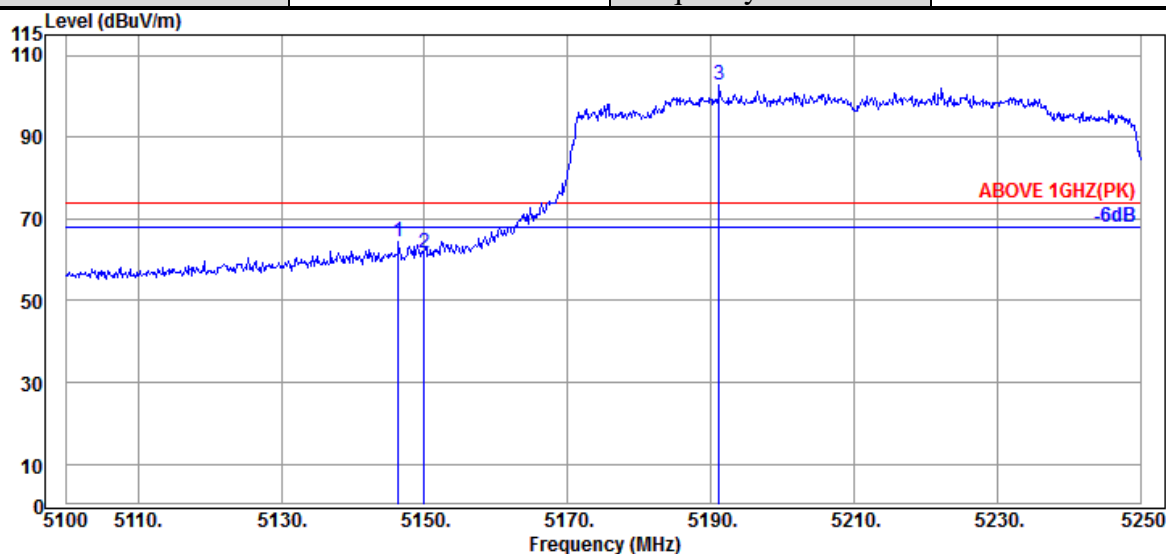

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.350                 | 34.20                 | 10.70           | 34.35                  | 53.72             | 64.27                   | 74.00           | 9.73        | Peak     |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 51.20             | 61.75                   | 74.00           | 12.25       | Peak     |
| @ 5191.200               | 34.20                 | 10.74           | 34.34                  | 92.32             | 102.92                  | ---             | ---         | Peak     |

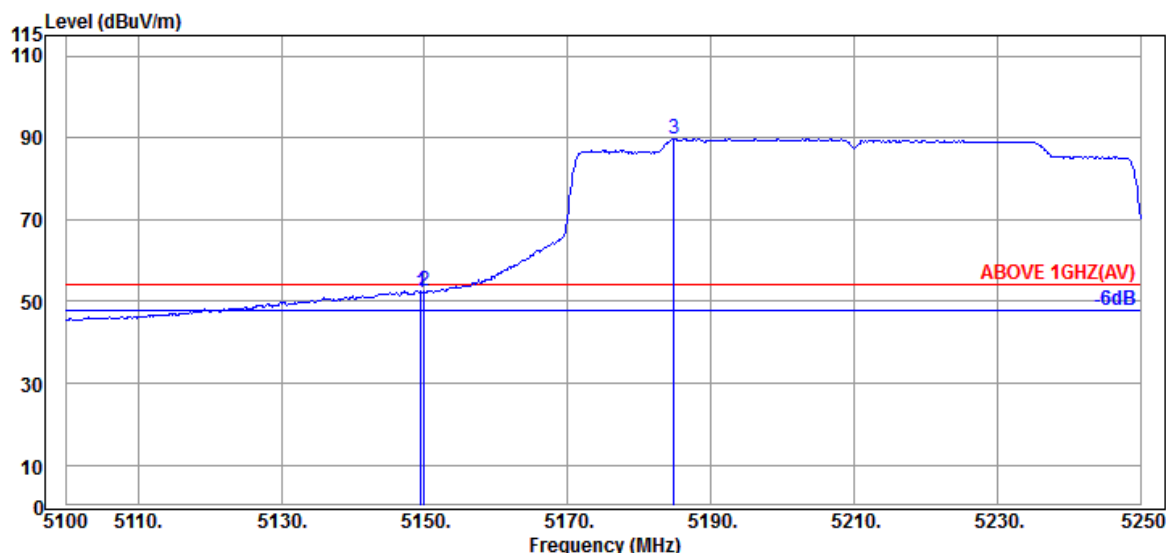

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.500                 | 34.20                 | 10.70           | 34.35                  | 41.79             | 52.34                   | 54.00           | 1.66        | Average  |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 41.84             | 52.39                   | 54.00           | 1.61        | Average  |
| @ 5184.900               | 34.20                 | 10.72           | 34.34                  | 79.28             | 89.86                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5290MHz |

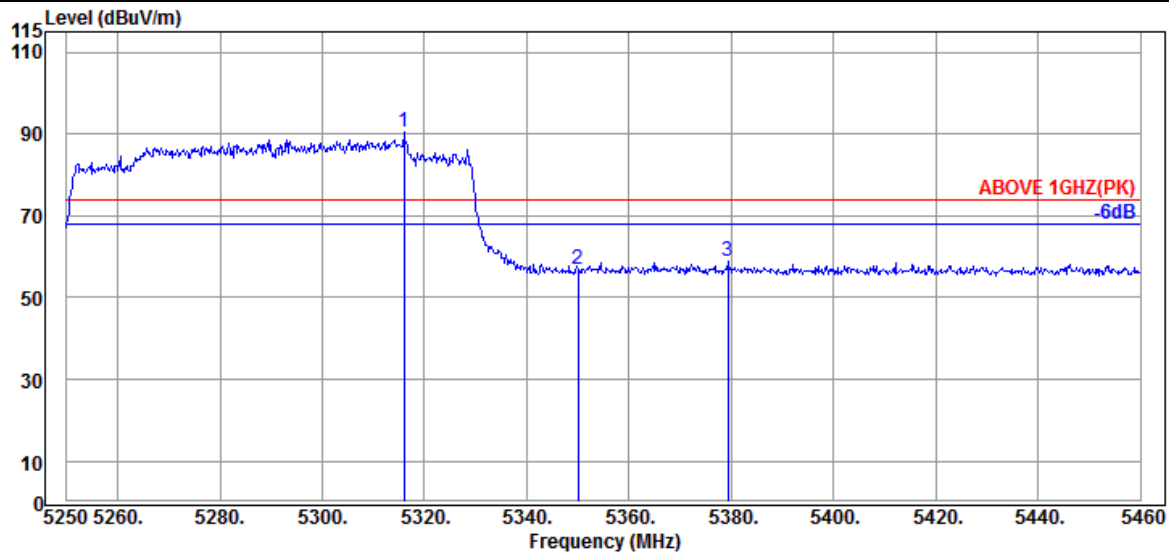

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5315.940                 | 34.53                 | 10.81           | 34.29                  | 79.37             | 90.42                   | ---             | ---         | Peak     |
|   | 5349.960                 | 34.60                 | 10.83           | 34.27                  | 45.77             | 56.93                   | 74.00           | 17.07       | Peak     |
|   | 5379.360                 | 34.67                 | 10.85           | 34.27                  | 47.72             | 58.97                   | 74.00           | 15.03       | Peak     |

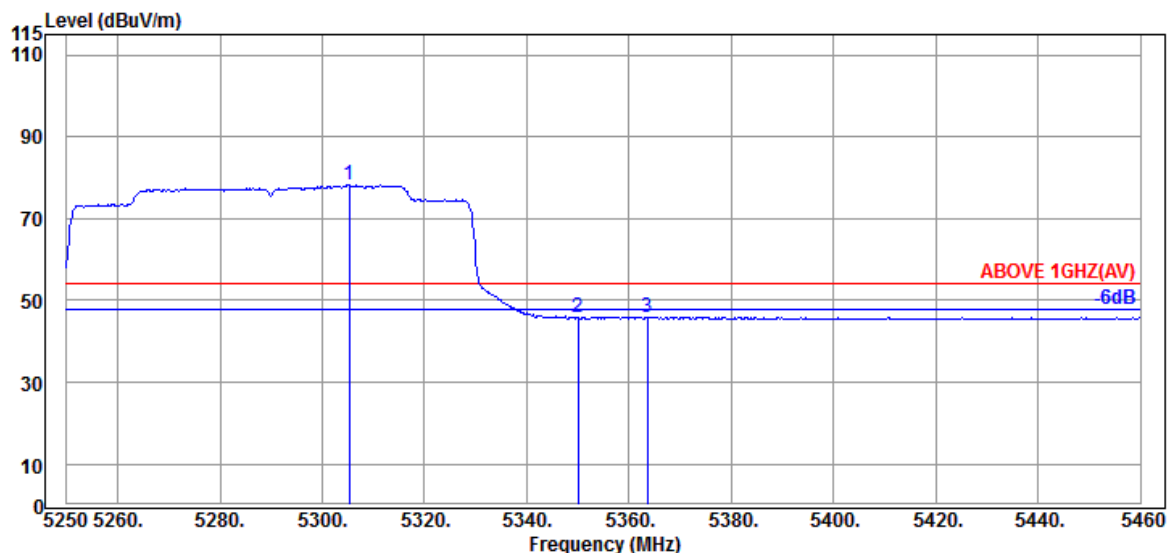

#### Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5305.230                 | 34.50                 | 10.81           | 34.29                  | 67.26             | 78.28                   | ---             | ---         | Average  |
|   | 5349.960                 | 34.60                 | 10.83           | 34.27                  | 34.49             | 45.65                   | 54.00           | 8.35        | Average  |
|   | 5363.610                 | 34.63                 | 10.85           | 34.27                  | 34.75             | 45.96                   | 54.00           | 8.04        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5290MHz |

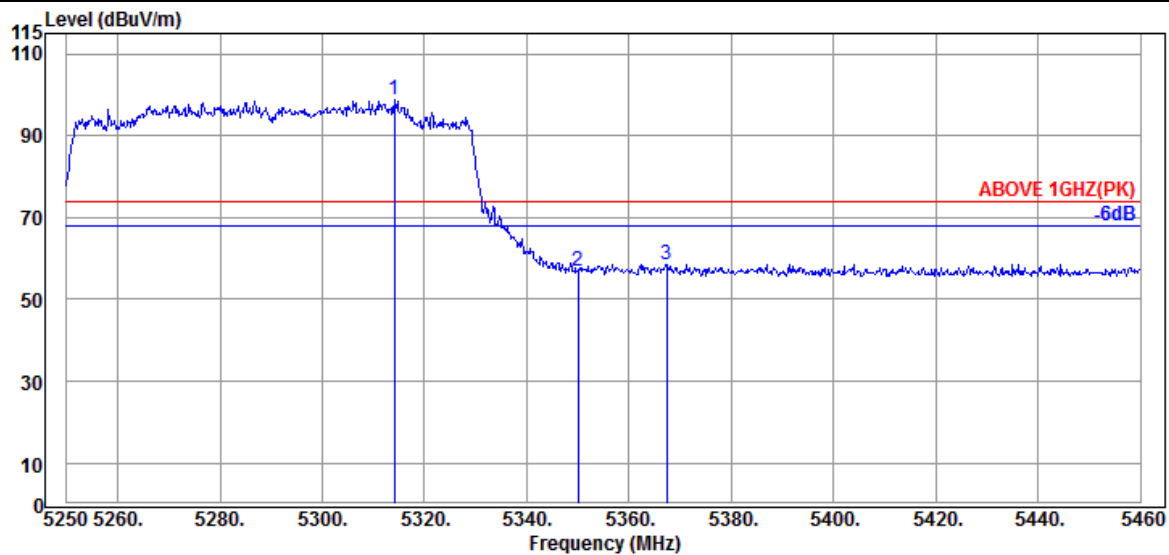

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5314.050                 | 34.53                 | 10.81           | 34.29            | 87.65             | 98.70                   | ---             | ---         | Peak     |
|   | 5349.960                 | 34.60                 | 10.83           | 34.27            | 45.90             | 57.06                   | 74.00           | 16.94       | Peak     |
|   | 5367.390                 | 34.63                 | 10.85           | 34.27            | 47.36             | 58.57                   | 74.00           | 15.43       | Peak     |

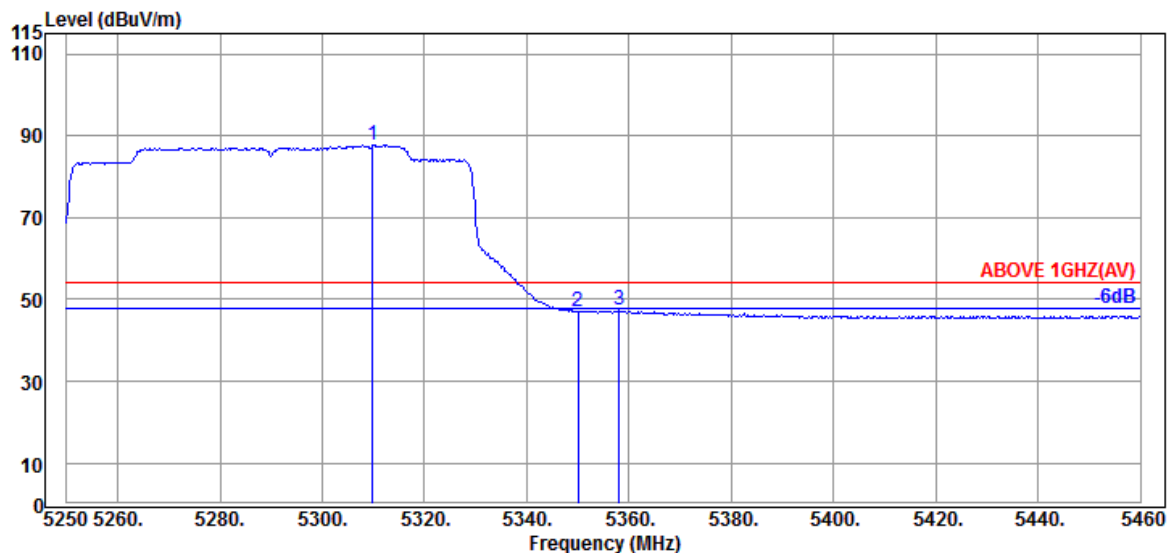


Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5309.850                 | 34.53                 | 10.81           | 34.29            | 76.62             | 87.67                   | ---             | ---         | Average  |
|   | 5349.960                 | 34.60                 | 10.83           | 34.27            | 35.88             | 47.04                   | 54.00           | 6.96        | Average  |
|   | 5358.150                 | 34.63                 | 10.85           | 34.27            | 36.32             | 47.53                   | 54.00           | 6.47        | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5530MHz |

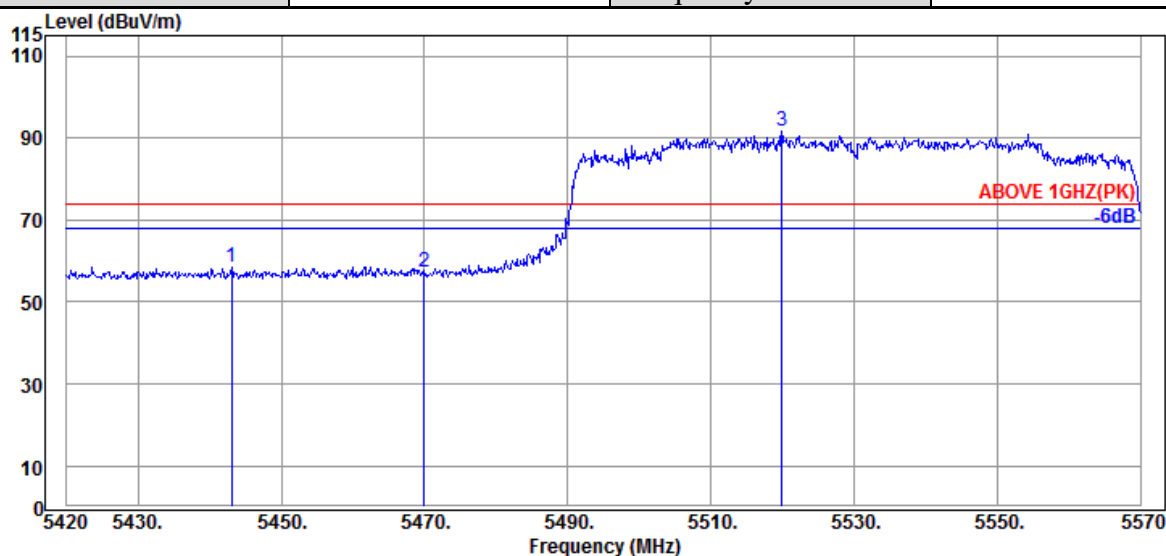

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5443.100                 | 34.55                 | 10.89           | 34.25                  | 47.30             | 58.49                   | 74.00           | 15.51       | Peak     |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 46.26             | 57.40                   | 74.00           | 16.60       | Peak     |
| @ 5519.900               | 34.37                 | 10.93           | 34.24                  | 80.74             | 91.80                   | ---             | ---         | Peak     |

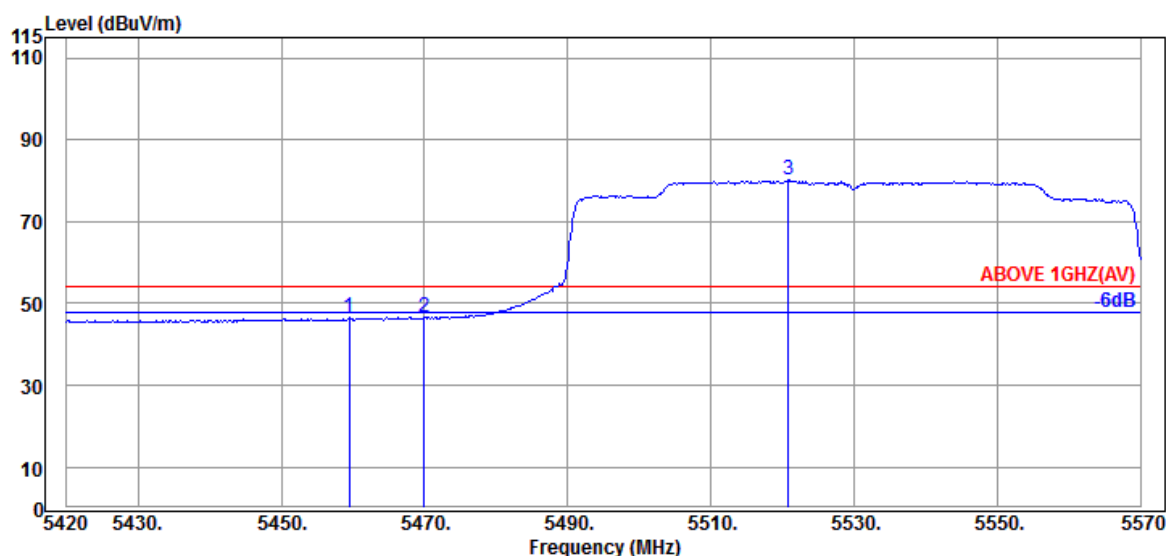

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.450                 | 34.50                 | 10.91           | 34.24                  | 35.46             | 46.63                   | 54.00           | 7.37        | Average  |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 35.30             | 46.44                   | 54.00           | 7.56        | Average  |
| @ 5520.800               | 34.37                 | 10.93           | 34.24                  | 69.08             | 80.14                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5530MHz |

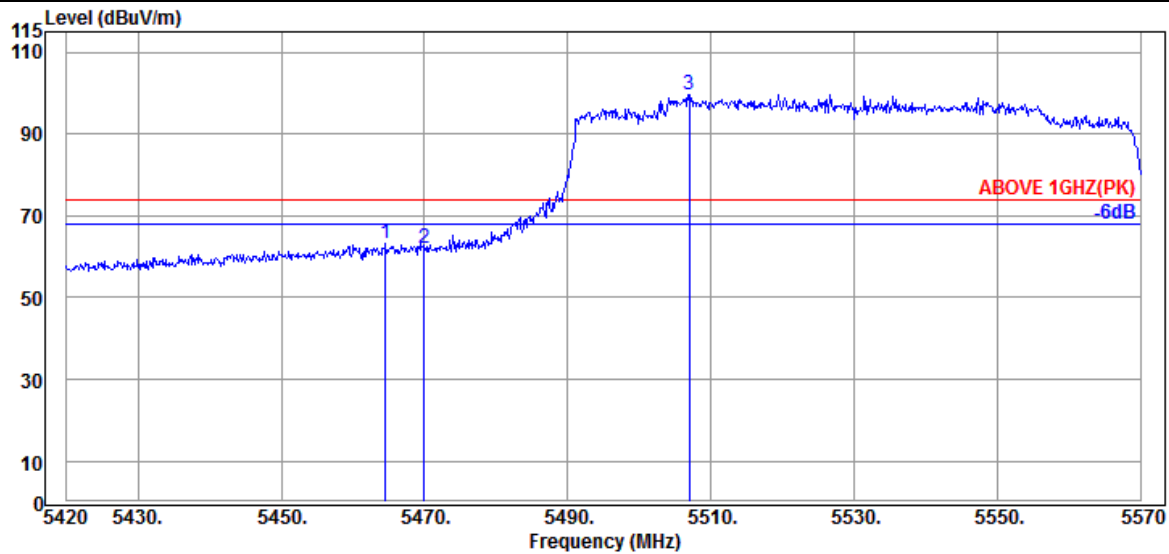

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5464.550                 | 34.47                 | 10.91           | 34.24                  | 52.03             | 63.17                   | 74.00           | 10.83       | Peak     |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 50.71             | 61.85                   | 74.00           | 12.15       | Peak     |
| @ 5507.000               | 34.40                 | 10.93           | 34.24                  | 88.65             | 99.74                   | ---             | ---         | Peak     |

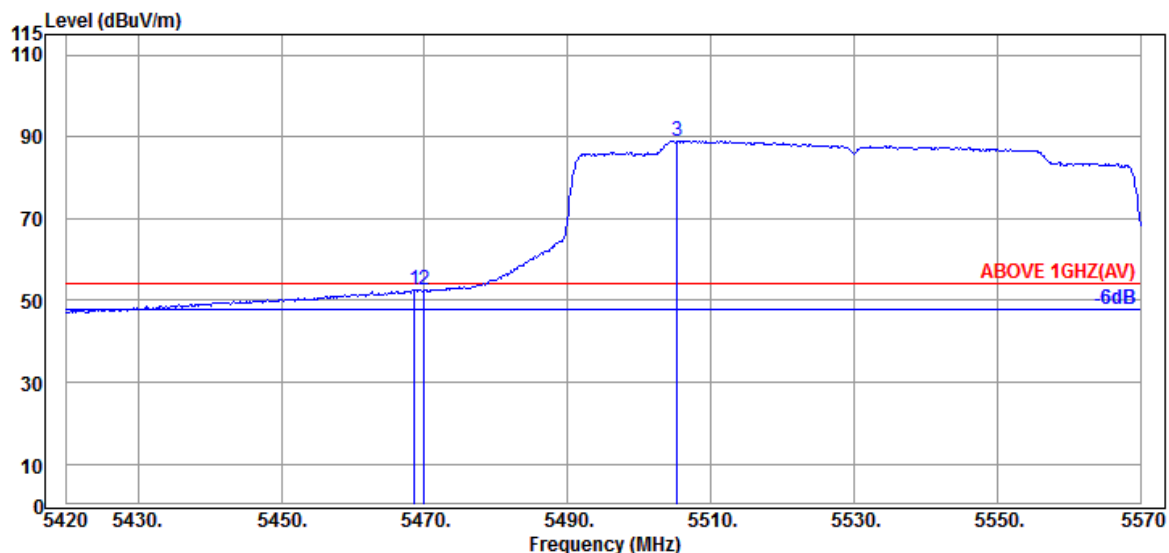

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.600                 | 34.47                 | 10.91           | 34.24                  | 41.60             | 52.74                   | 54.00           | 1.26        | Average  |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 41.36             | 52.50                   | 54.00           | 1.50        | Average  |
| @ 5505.350               | 34.40                 | 10.93           | 34.24                  | 77.94             | 89.03                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5610MHz |

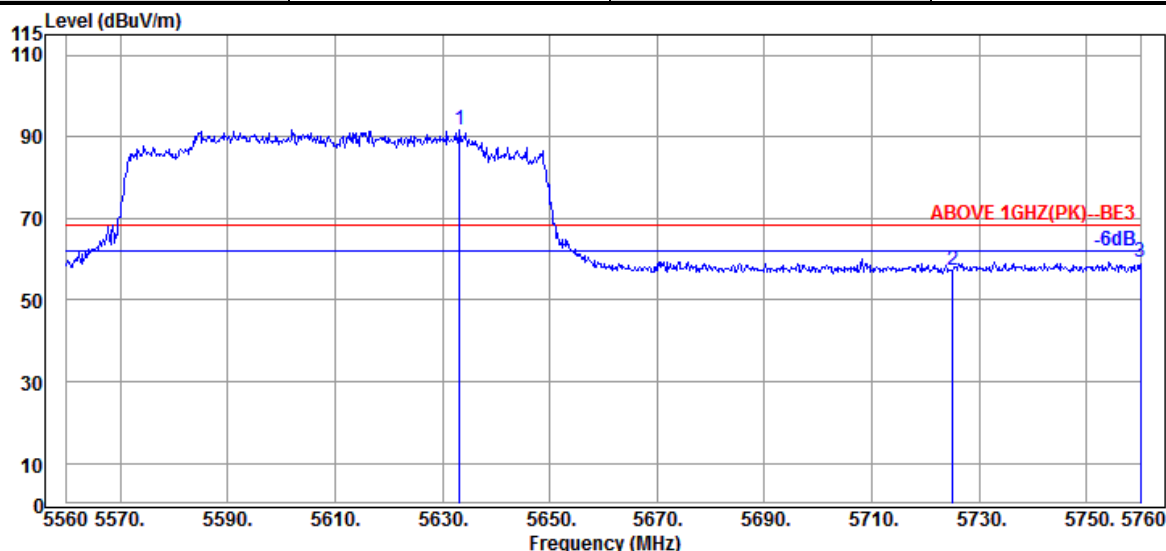

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5633.200               | 34.40                 | 10.99           | 34.29            | 80.62             | 91.72                   | ---             | ---         | Peak     |
| 5725.000                 | 34.67                 | 11.05           | 34.32            | 45.81             | 57.21                   | 68.20           | 10.99       | Peak     |
| 5760.000                 | 34.87                 | 11.06           | 34.35            | 47.79             | 59.37                   | 68.20           | 8.83        | Peak     |

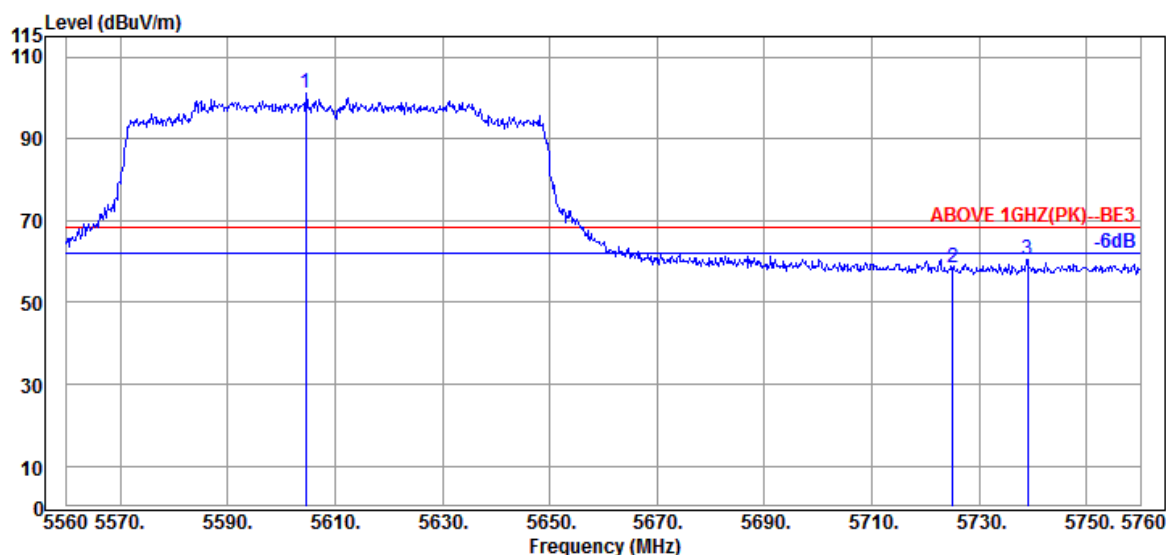

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5604.600               | 34.40                 | 10.99           | 34.28            | 89.92             | 101.03                  | ---             | ---         | Peak     |
| 5725.000                 | 34.67                 | 11.05           | 34.32            | 46.89             | 58.29                   | 68.20           | 9.91        | Peak     |
| 5739.000                 | 34.80                 | 11.05           | 34.33            | 49.01             | 60.53                   | 68.20           | 7.67        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5690MHz |

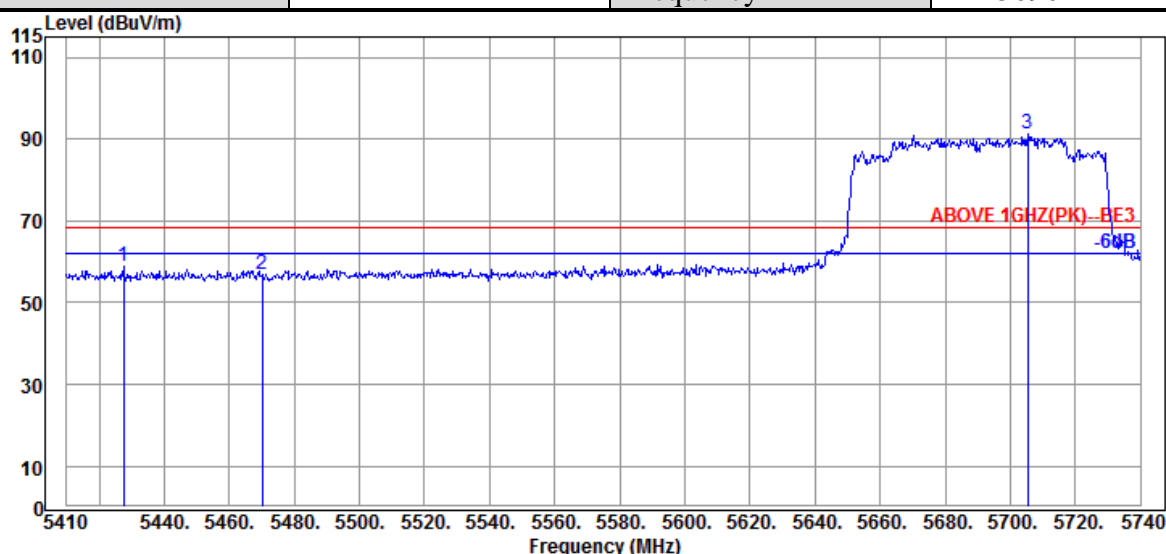

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5427.490                 | 34.60                 | 10.89           | 34.25                  | 47.69             | 58.93                   | 68.20           | 9.27        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24                  | 45.74             | 56.88                   | 68.20           | 11.32       | Peak     |
| @ 5705.350               | 34.40                 | 11.03           | 34.32                  | 80.18             | 91.29                   | ---             | ---         | Peak     |

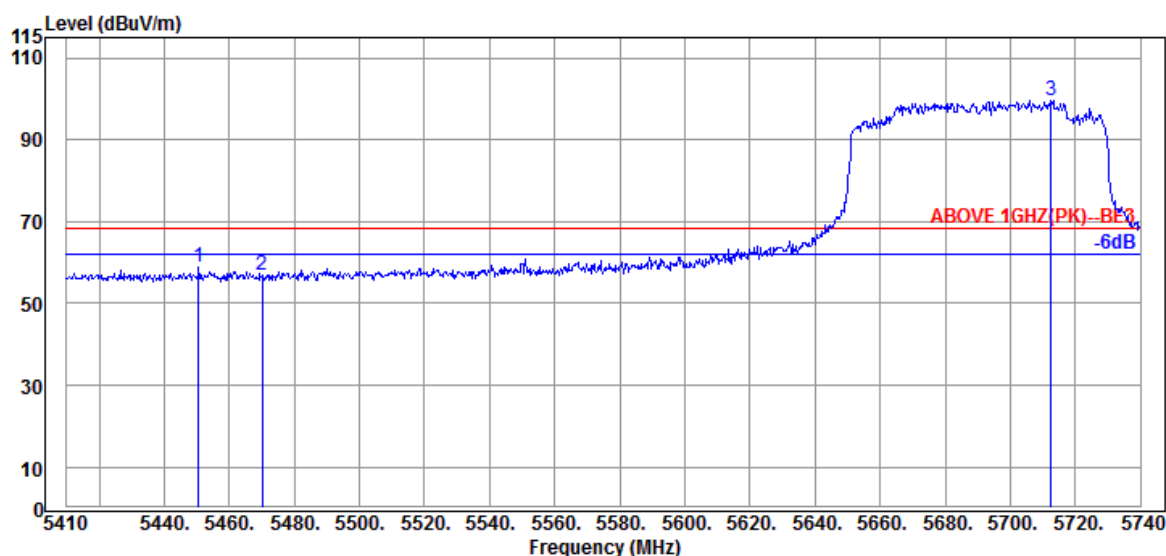

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5450.590                 | 34.50                 | 10.89           | 34.24                  | 47.74             | 58.89                   | 68.20           | 9.31        | Peak     |
| 5470.060                 | 34.47                 | 10.91           | 34.24                  | 45.81             | 56.95                   | 68.20           | 11.25       | Peak     |
| @ 5712.610               | 34.53                 | 11.05           | 34.32                  | 88.34             | 99.60                   | ---             | ---         | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5690MHz |

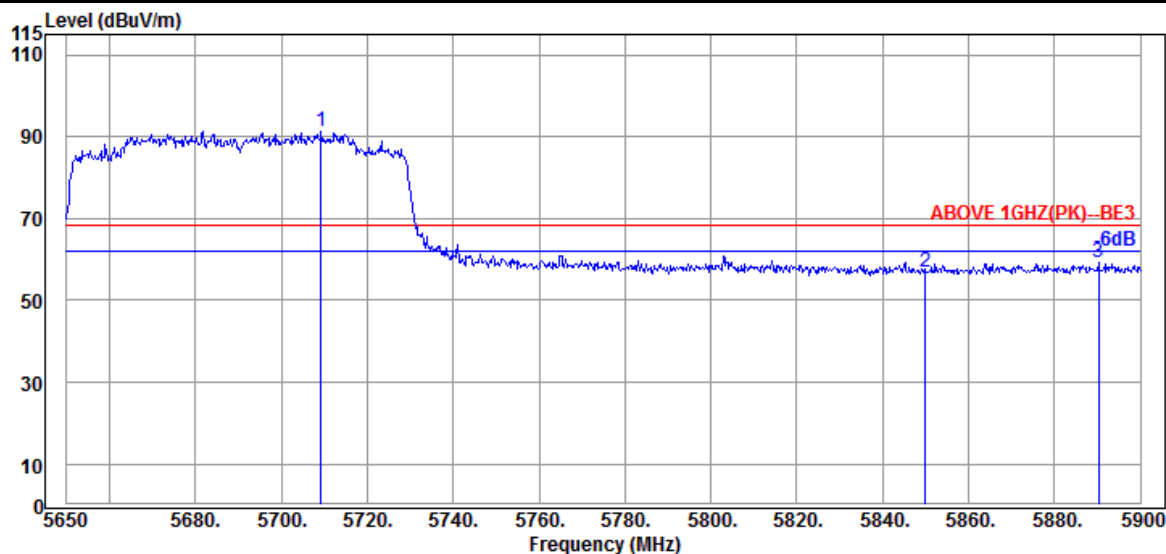

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5709.250               | 34.53                 | 11.03           | 34.32                  | 80.12             | 91.36                   | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38                  | 45.27             | 57.09                   | 68.20           | 11.11       | Peak     |
| 5890.250                 | 35.40                 | 11.12           | 34.40                  | 47.06             | 59.18                   | 68.20           | 9.02        | Peak     |

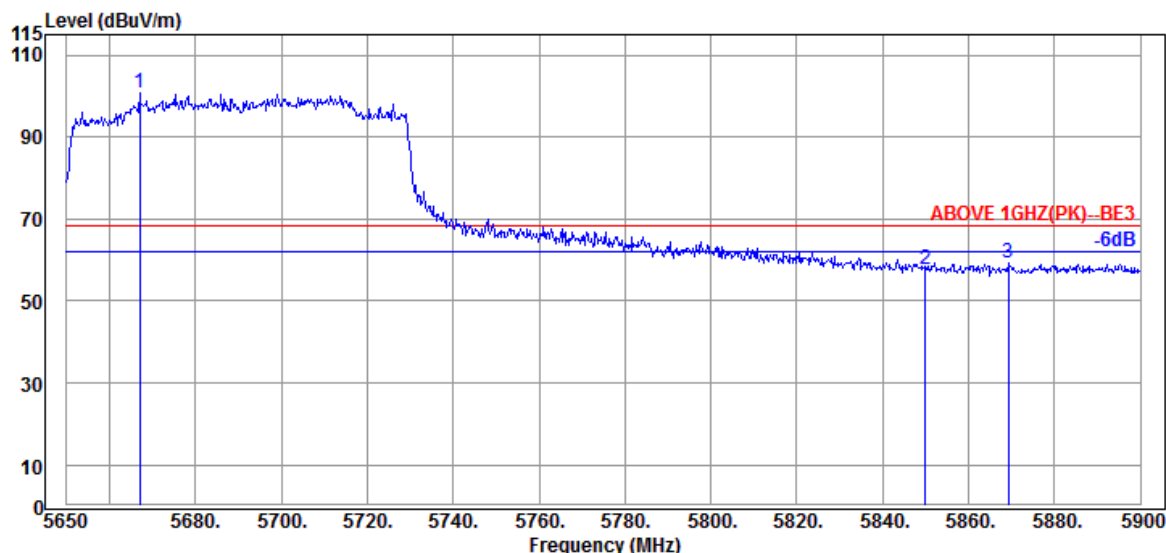

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5667.000               | 34.40                 | 11.01           | 34.30                  | 89.80             | 100.91                  | ---             | ---         | Peak     |
| 5850.000                 | 35.10                 | 11.10           | 34.38                  | 45.80             | 57.62                   | 68.20           | 10.58       | Peak     |
| 5869.250                 | 35.20                 | 11.12           | 34.39                  | 47.47             | 59.40                   | 68.20           | 8.80        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ac-HE80 | U-NII Band | III        |
|      |               | Frequency  | TX 5775MHz |

### Antenna at Horizontal Polarization

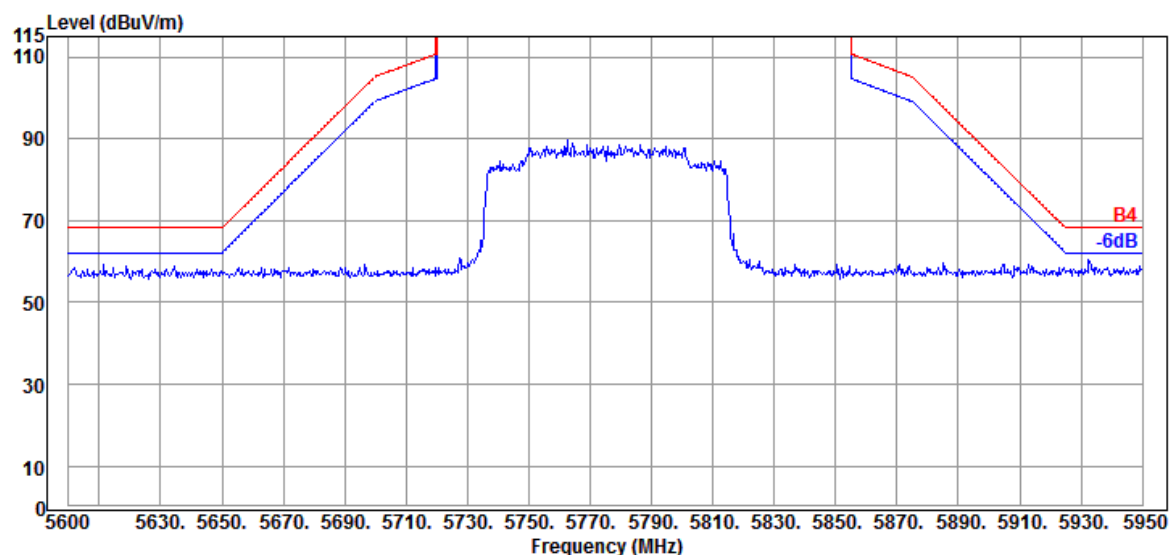


### Antenna at Vertical Polarization

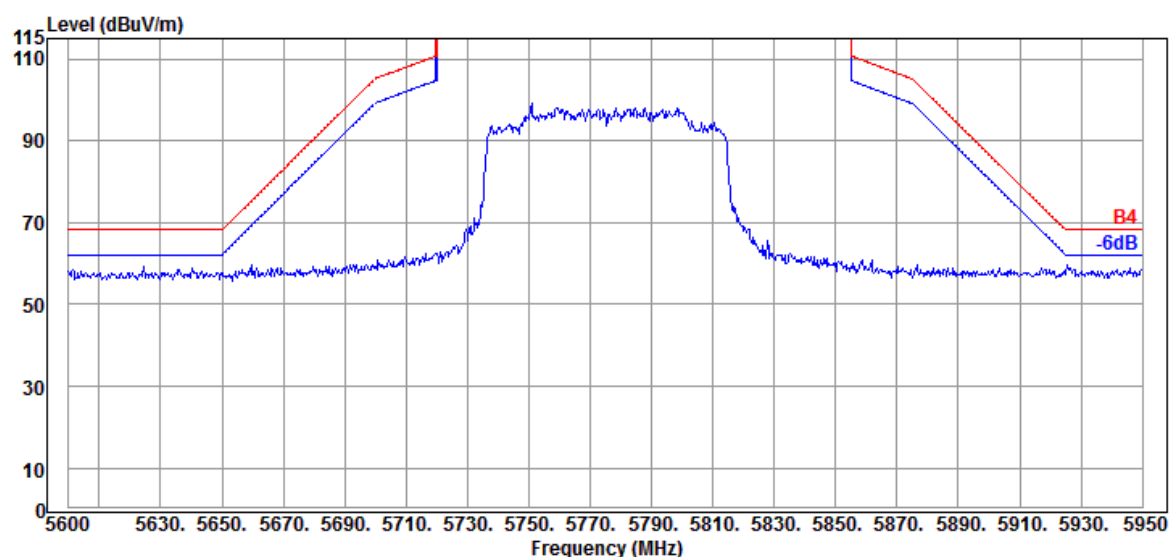

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

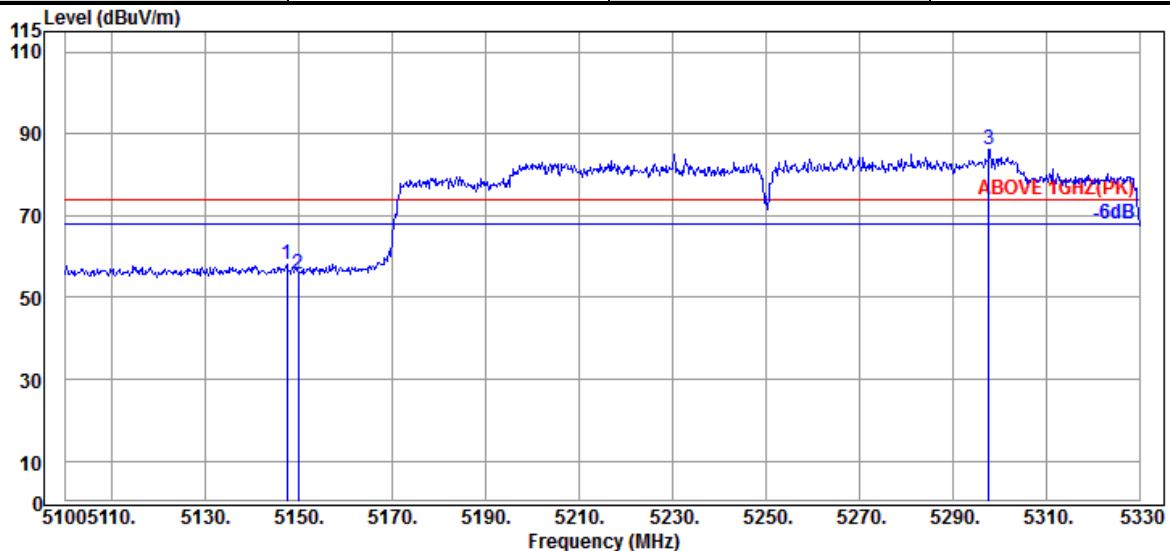

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.380                 | 34.20                 | 10.70           | 34.35                  | 47.61             | 58.16                   | 74.00           | 15.84       | Peak     |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 45.24             | 55.79                   | 74.00           | 18.21       | Peak     |
| @ 5297.800               | 34.50                 | 10.81           | 34.29                  | 75.31             | 86.33                   | ---             | ---         | Peak     |

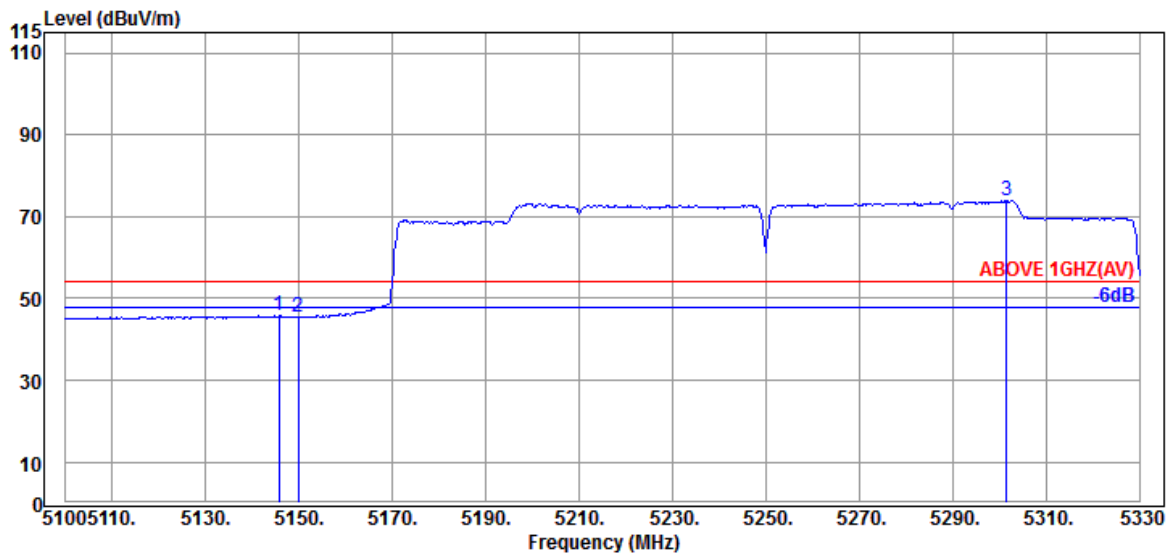

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.770                 | 34.20                 | 10.70           | 34.35                  | 35.26             | 45.81                   | 54.00           | 8.19        | Average  |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 34.96             | 45.51                   | 54.00           | 8.49        | Average  |
| @ 5301.480               | 34.50                 | 10.81           | 34.29                  | 63.07             | 74.09                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

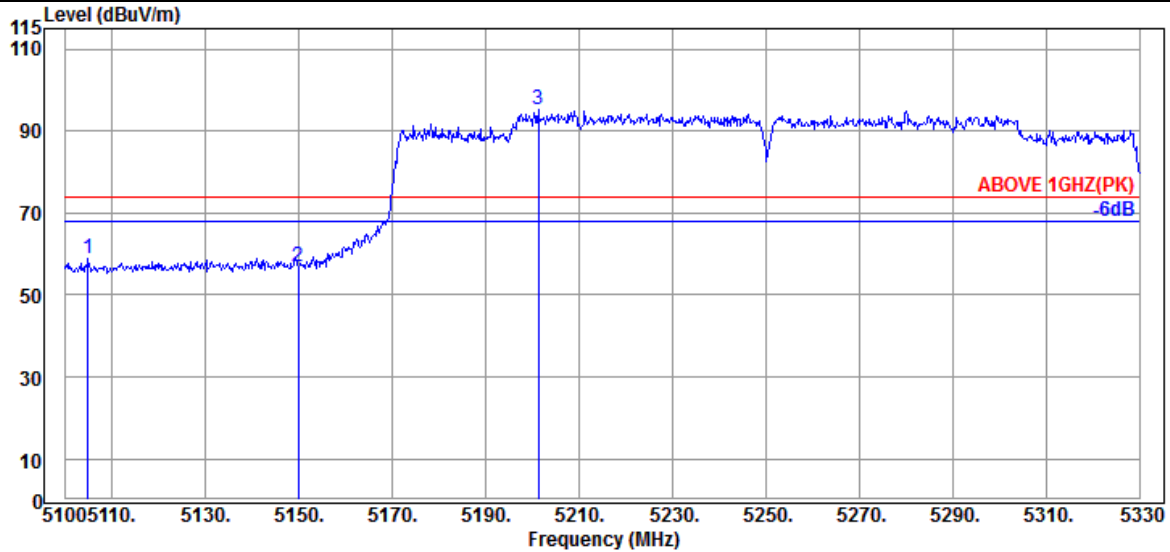

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5104.830                 | 34.10                 | 10.68           | 34.36                  | 48.52             | 58.94                   | 74.00           | 15.06       | Peak     |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 46.31             | 56.86                   | 74.00           | 17.14       | Peak     |
| @ 5201.200               | 34.20                 | 10.74           | 34.33                  | 84.54             | 95.15                   | ---             | ---         | Peak     |

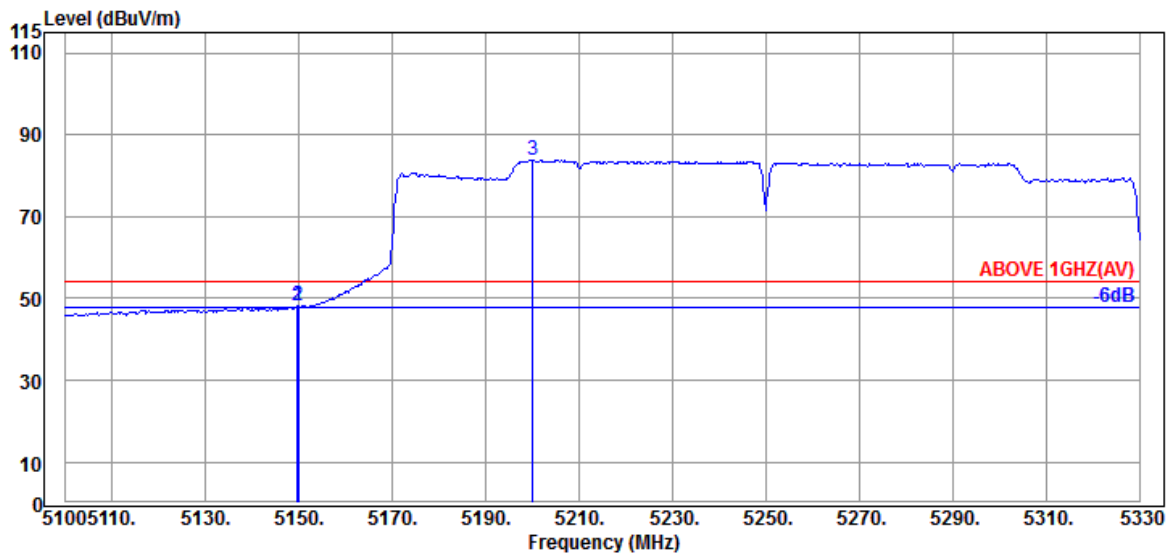

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.680                 | 34.20                 | 10.70           | 34.35                  | 37.58             | 48.13                   | 54.00           | 5.87        | Average  |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 37.48             | 48.03                   | 54.00           | 5.97        | Average  |
| @ 5200.050               | 34.20                 | 10.74           | 34.33                  | 73.32             | 83.93                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11ax-HE160 | U-NII Band | I & 2A     |
|------|----------------|------------|------------|
|      |                | Frequency  | TX 5250MHz |

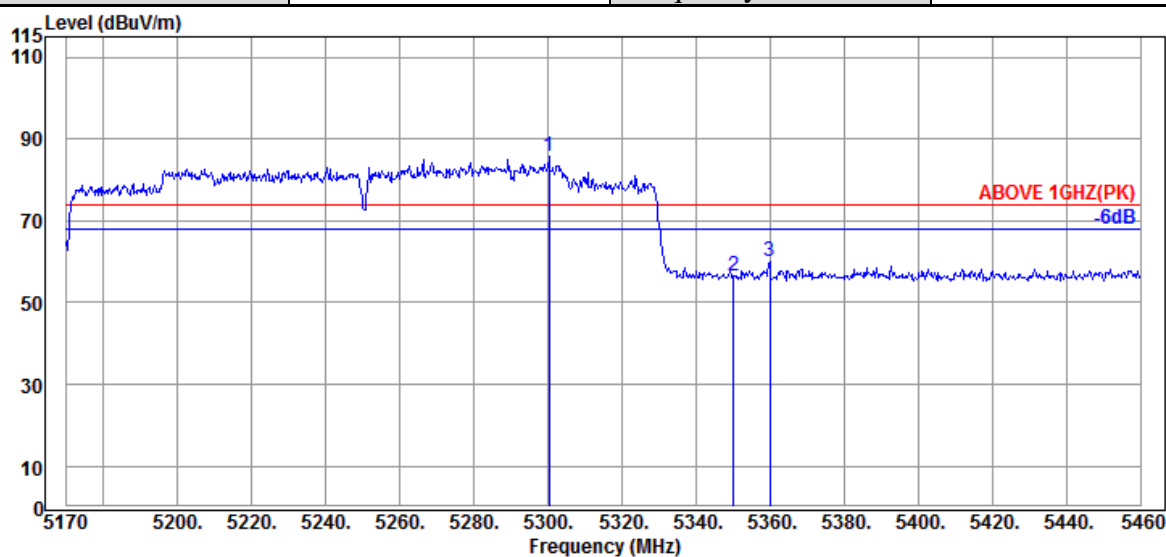

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5300.210                 | 34.50                 | 10.81           | 34.29            | 74.80             | 85.82                   | ---             | ---         | Peak     |
|   | 5350.090                 | 34.60                 | 10.83           | 34.27            | 45.36             | 56.52                   | 74.00           | 17.48       | Peak     |
|   | 5359.950                 | 34.63                 | 10.85           | 34.27            | 48.71             | 59.92                   | 74.00           | 14.08       | Peak     |

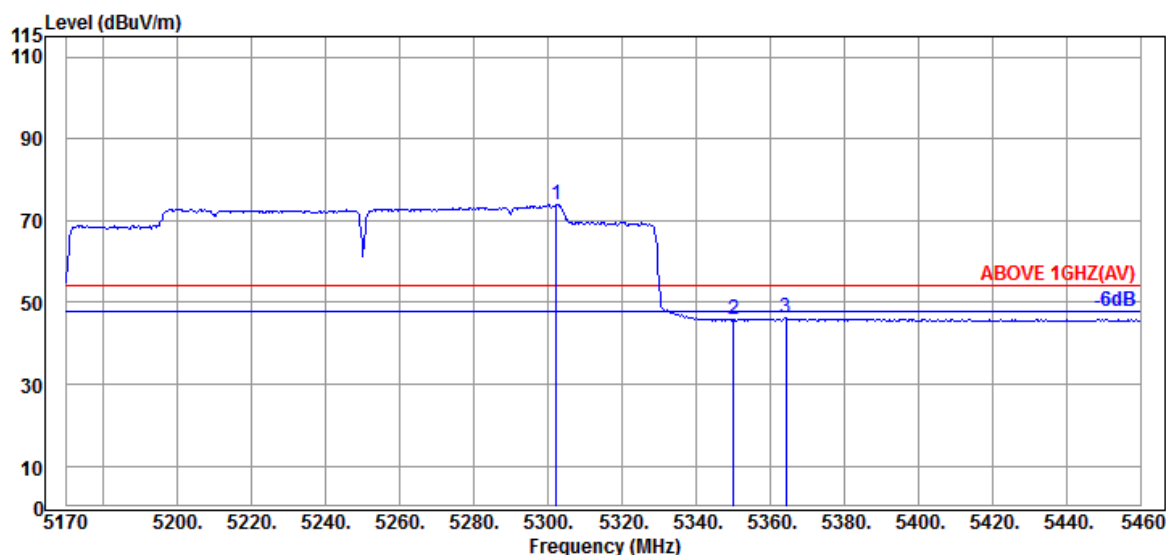

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5302.240                 | 34.50                 | 10.81           | 34.29            | 62.88             | 73.90                   | ---             | ---         | Average  |
|   | 5350.090                 | 34.60                 | 10.83           | 34.27            | 34.54             | 45.70                   | 54.00           | 8.30        | Average  |
|   | 5364.300                 | 34.63                 | 10.85           | 34.27            | 34.94             | 46.15                   | 54.00           | 7.85        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | I & 2A     |
|      |                | Frequency  | TX 5250MHz |

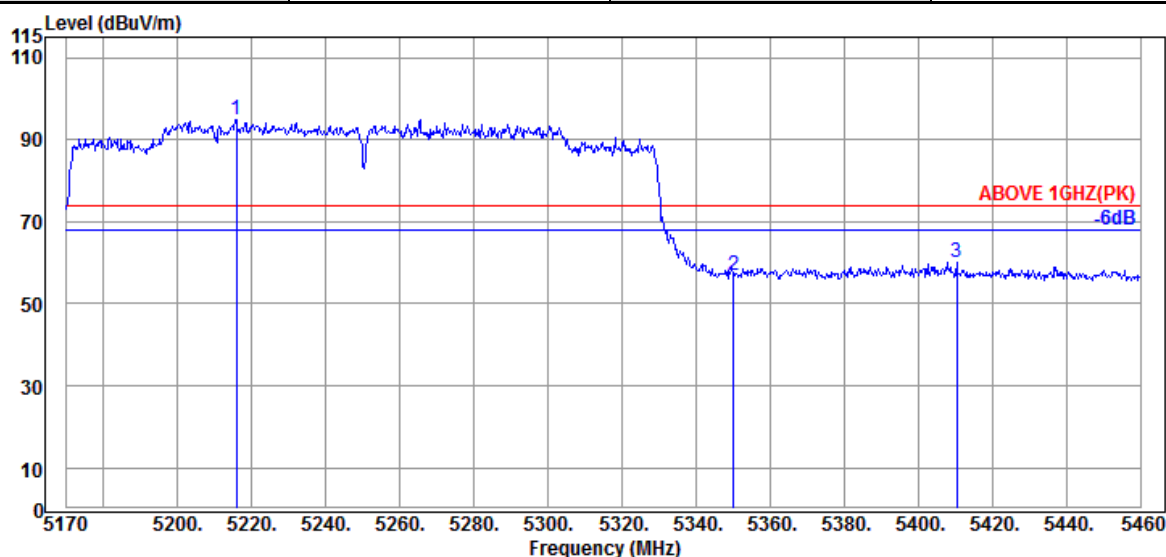

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5215.820               | 34.25                 | 10.74           | 34.33                  | 84.16             | 94.82                   | ---             | ---         | Peak     |
| 5350.090                 | 34.60                 | 10.83           | 34.27                  | 45.87             | 57.03                   | 74.00           | 16.97       | Peak     |
| 5410.410                 | 34.65                 | 10.87           | 34.26                  | 48.88             | 60.14                   | 74.00           | 13.86       | Peak     |

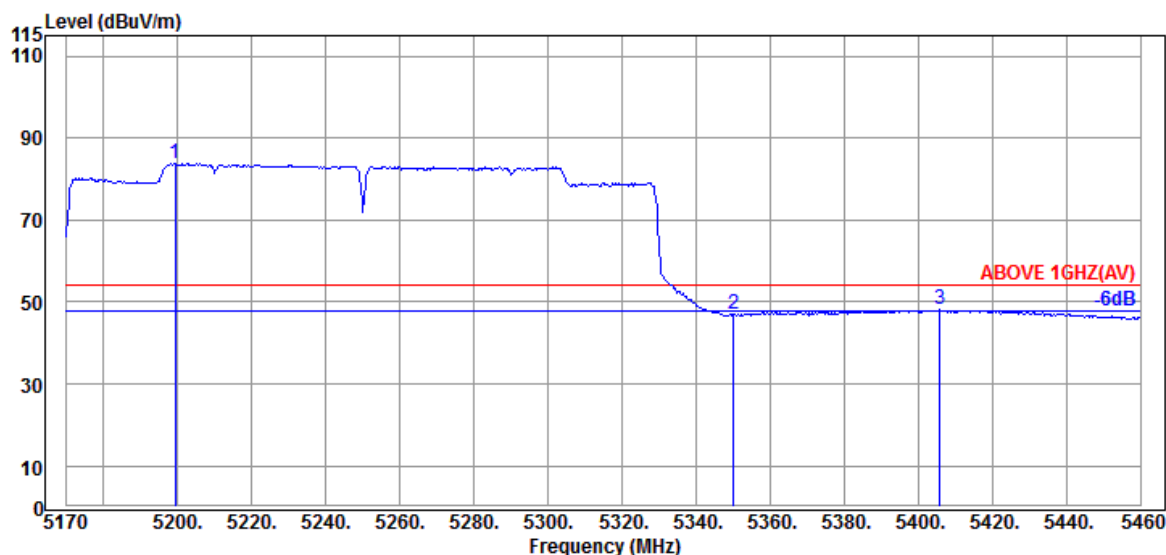

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5199.290               | 34.20                 | 10.74           | 34.33                  | 73.13             | 83.74                   | ---             | ---         | Average  |
| 5350.090                 | 34.60                 | 10.83           | 34.27                  | 35.73             | 46.89                   | 54.00           | 7.11        | Average  |
| 5405.770                 | 34.65                 | 10.87           | 34.26                  | 36.78             | 48.04                   | 54.00           | 5.96        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

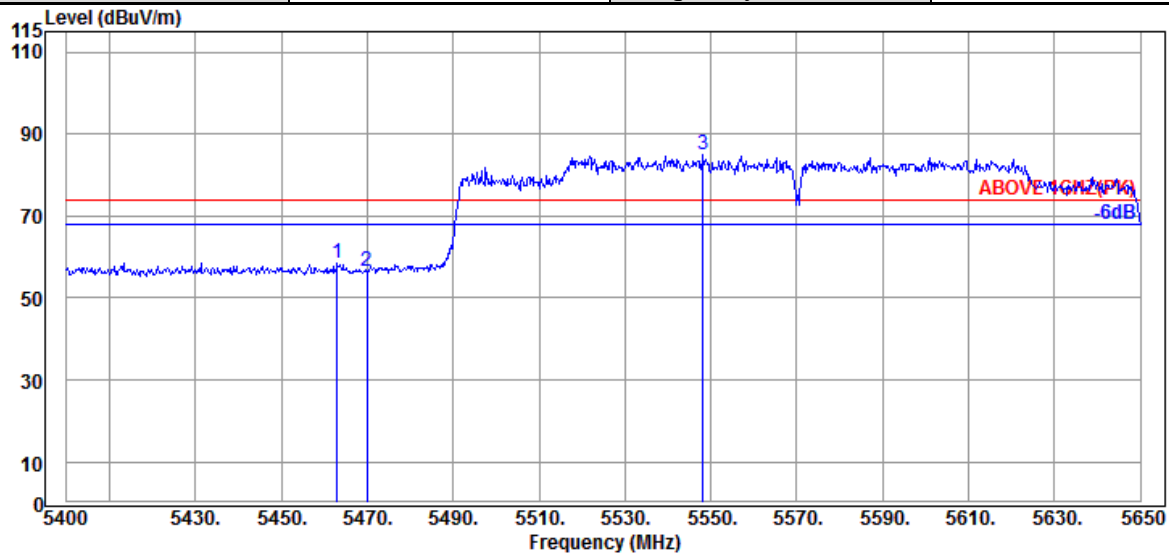

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5463.000                 | 34.50                 | 10.91           | 34.24            | 47.48             | 58.65                   | 74.00           | 15.35       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 45.40             | 56.54                   | 74.00           | 17.46       | Peak     |
| @ 5548.250               | 34.30                 | 10.95           | 34.25            | 73.97             | 84.97                   | ---             | ---         | Peak     |

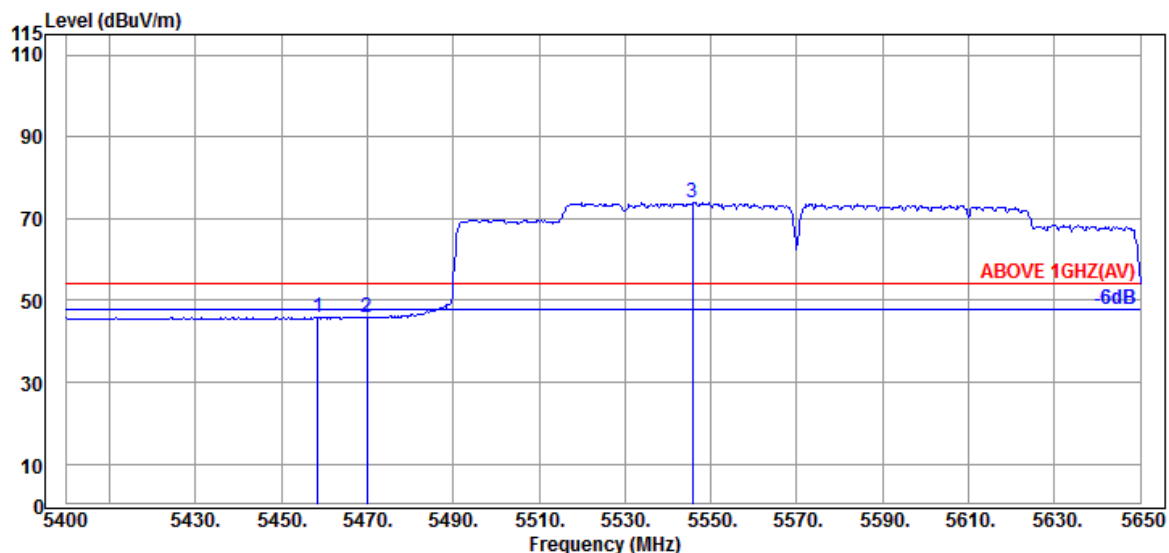


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.500                 | 34.50                 | 10.89           | 34.24            | 34.86             | 46.01                   | 54.00           | 7.99        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 34.83             | 45.97                   | 54.00           | 8.03        | Average  |
| @ 5545.750               | 34.30                 | 10.95           | 34.25            | 63.02             | 74.02                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

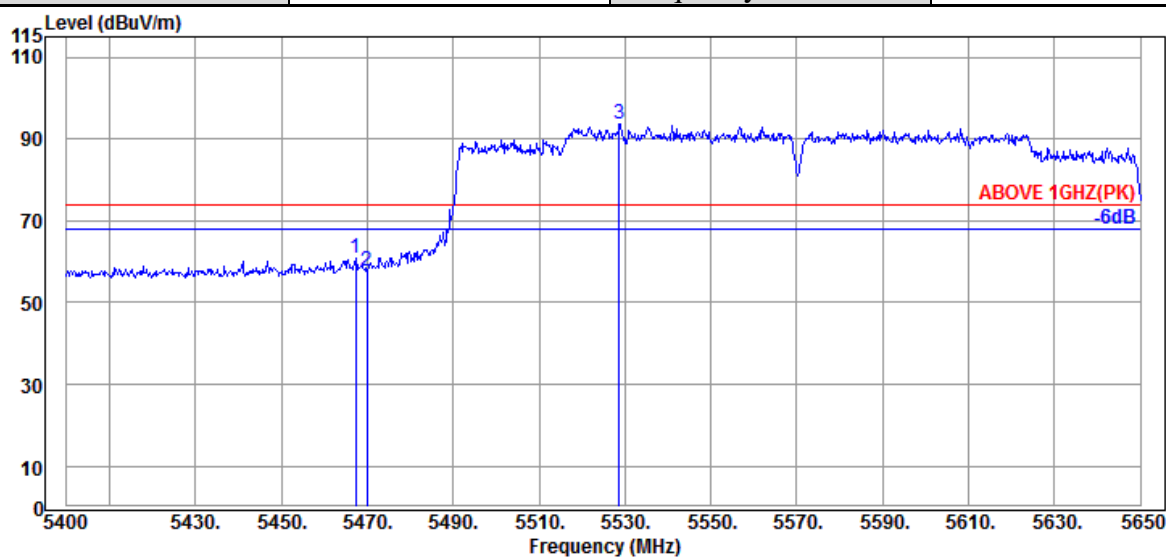

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.250                 | 34.47                 | 10.91           | 34.24            | 49.68             | 60.82                   | 74.00           | 13.18       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 46.72             | 57.86                   | 74.00           | 16.14       | Peak     |
| @ 5528.750               | 34.33                 | 10.93           | 34.25            | 82.71             | 93.72                   | ---             | ---         | Peak     |

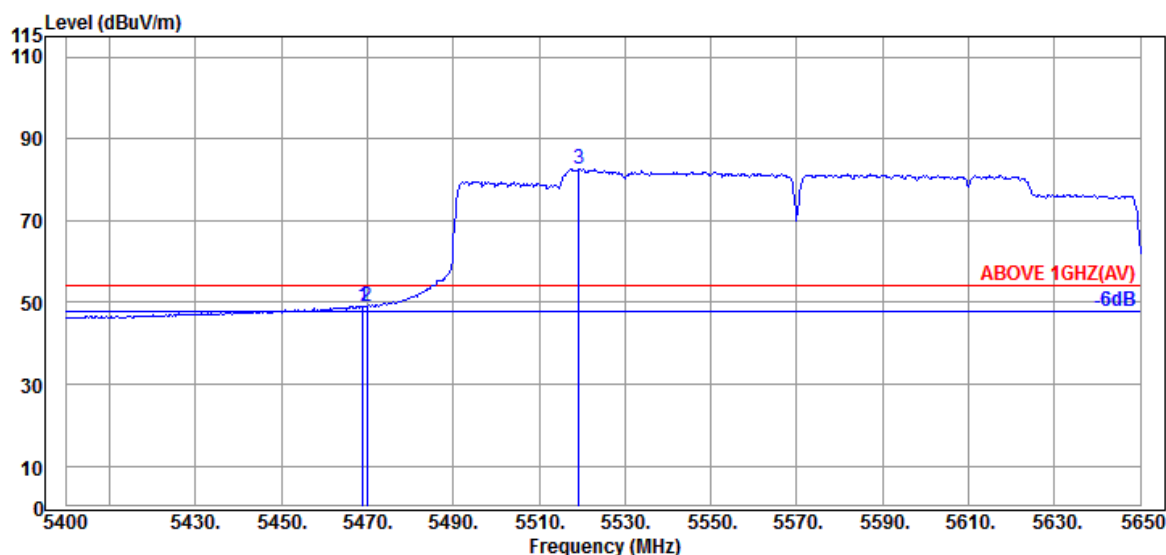


## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.000                 | 34.47                 | 10.91           | 34.24            | 37.87             | 49.01                   | 54.00           | 4.99        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 37.87             | 49.01                   | 54.00           | 4.99        | Average  |
| @ 5519.250               | 34.37                 | 10.93           | 34.24            | 71.52             | 82.58                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

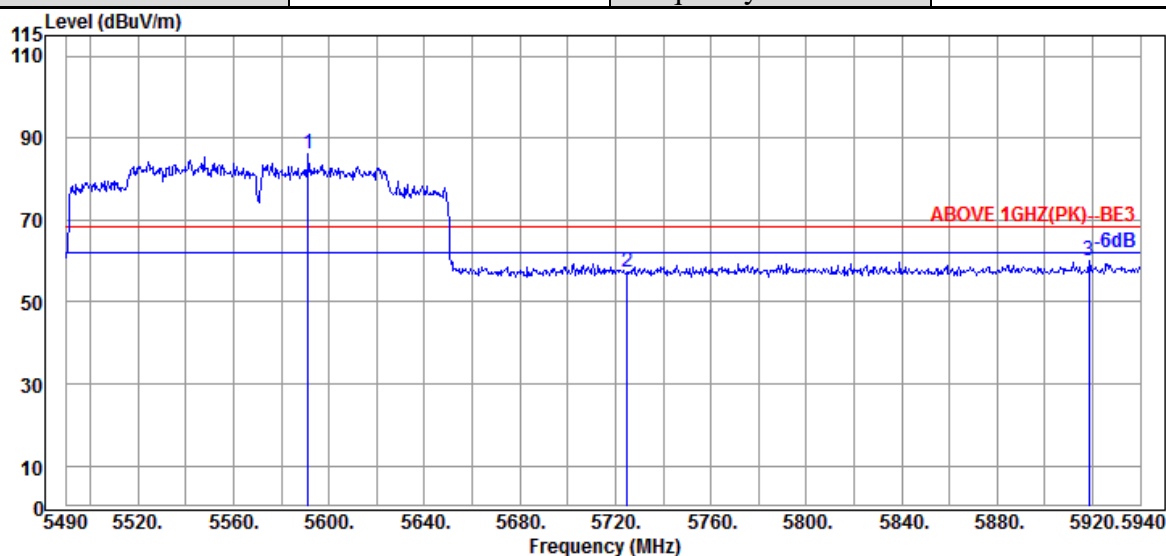

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5591.250               | 34.37                 | 10.97           | 34.27            | 75.10             | 86.17                   | ---             | ---         | Peak     |
| 5724.900                 | 34.67                 | 11.05           | 34.32            | 45.92             | 57.32                   | 68.20           | 10.88       | Peak     |
| 5918.400                 | 35.37                 | 11.14           | 34.41            | 48.00             | 60.10                   | 68.20           | 8.10        | Peak     |

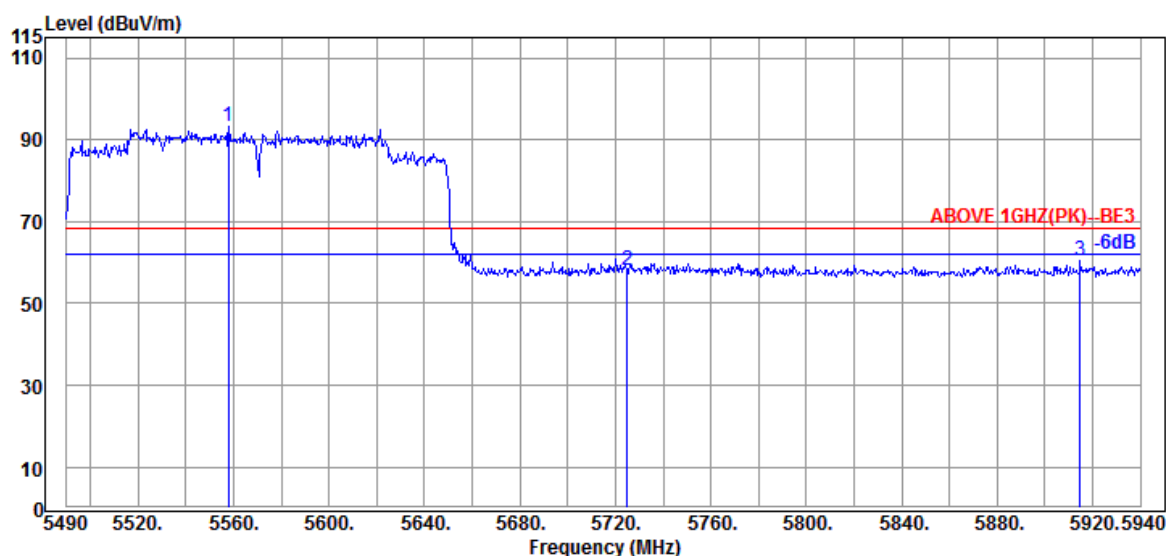

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5557.950               | 34.30                 | 10.95           | 34.26            | 82.29             | 93.28                   | ---             | ---         | Peak     |
| 5724.900                 | 34.67                 | 11.05           | 34.32            | 46.88             | 58.28                   | 68.20           | 9.92        | Peak     |
| 5914.800                 | 35.37                 | 11.14           | 34.41            | 48.39             | 60.49                   | 68.20           | 7.71        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | I          |
| RU Configuration | 26/0          | Frequency  | TX 5180MHz |

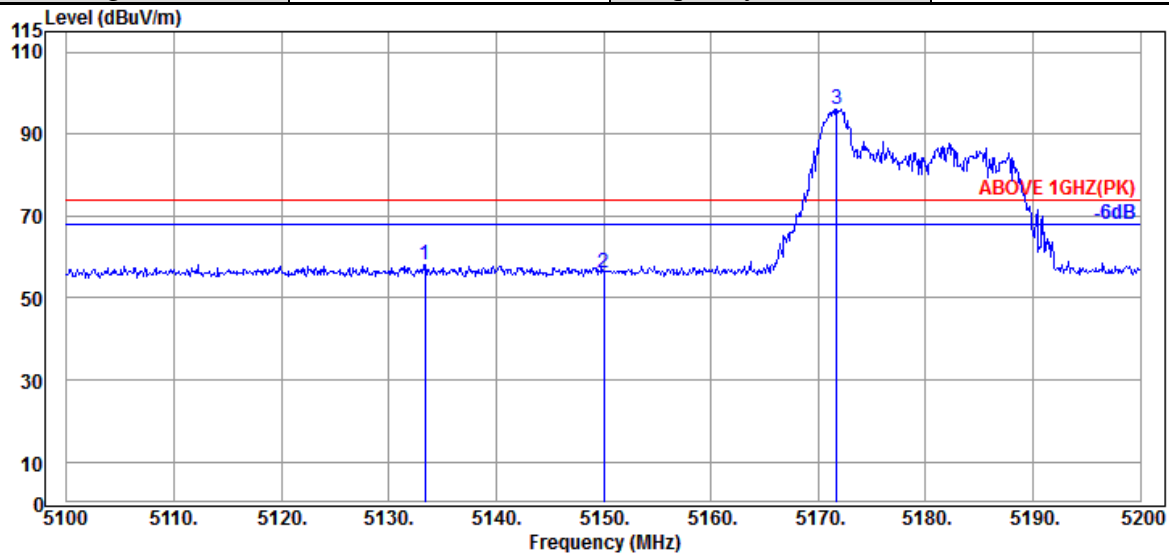

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5133.400                 | 34.17                 | 10.70           | 34.36                  | 47.75             | 58.26                   | 74.00           | 15.74       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 45.61             | 56.16                   | 74.00           | 17.84       | Peak     |
| @ 5171.700               | 34.20                 | 10.72           | 34.34                  | 85.60             | 96.18                   | ---             | ---         | Peak     |

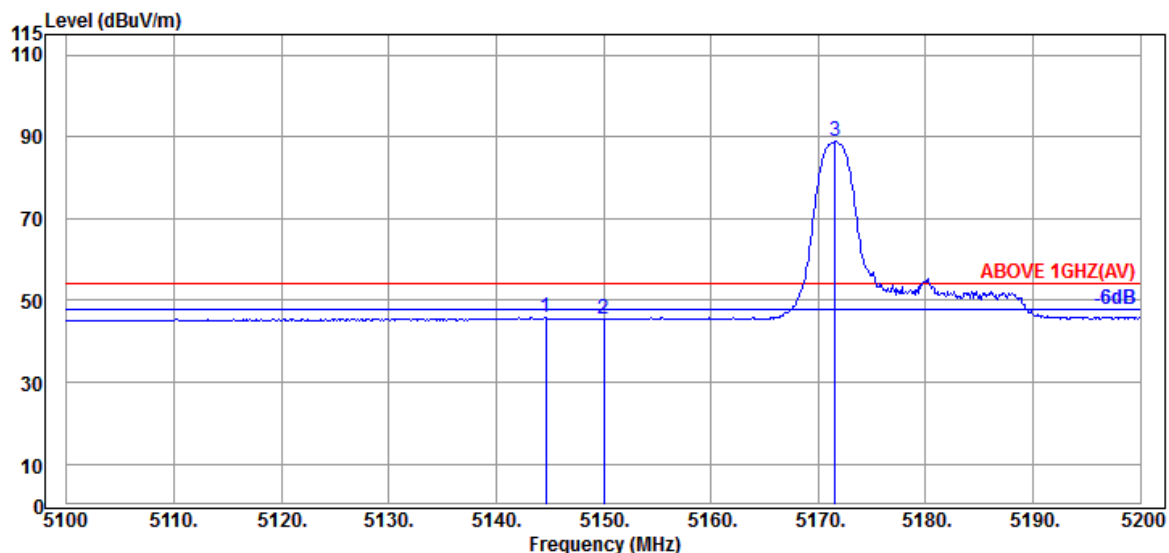


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5144.600                 | 34.20                 | 10.70           | 34.35                  | 35.18             | 45.73                   | 54.00           | 8.27        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 34.85             | 45.40                   | 54.00           | 8.60        | Average  |
| @ 5171.600               | 34.20                 | 10.72           | 34.34                  | 78.38             | 88.96                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | I          |
| RU Configuration | 26/0          | Frequency  | TX 5180MHz |

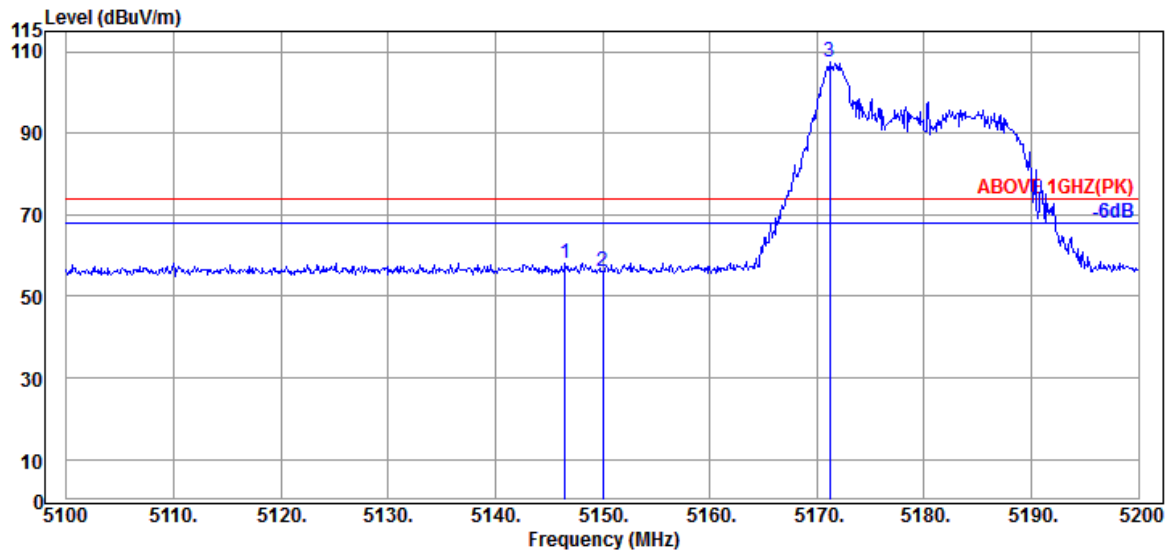

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.500                 | 34.20                 | 10.70           | 34.35                  | 47.48             | 58.03                   | 74.00           | 15.97       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 45.46             | 56.01                   | 74.00           | 17.99       | Peak     |
| @ 5171.200               | 34.20                 | 10.72           | 34.34                  | 96.75             | 107.33                  | ---             | ---         | Peak     |

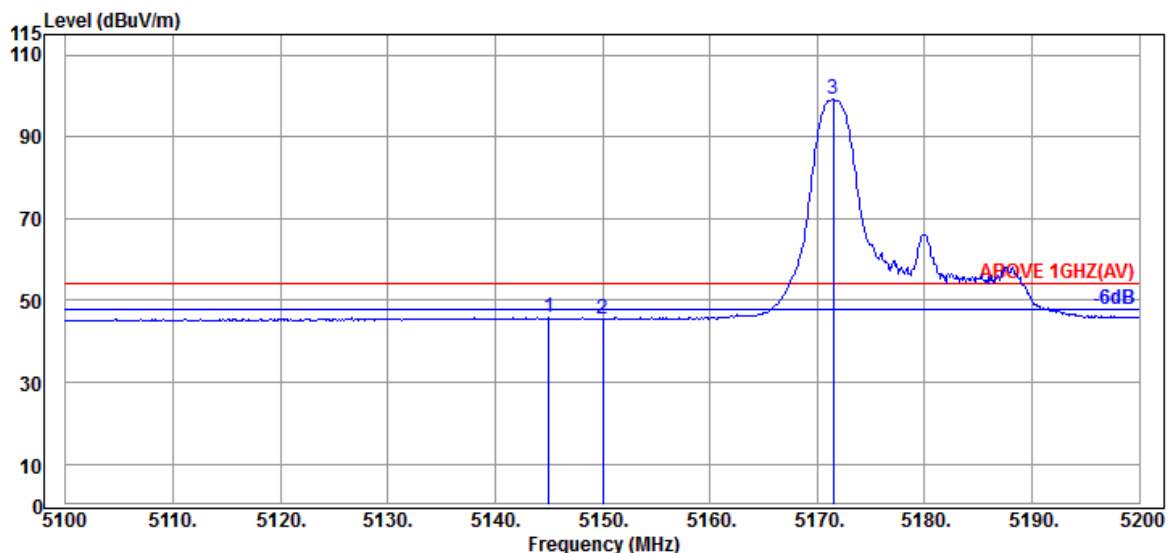

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.000                 | 34.20                 | 10.70           | 34.35                  | 35.24             | 45.79                   | 54.00           | 8.21        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 34.98             | 45.53                   | 54.00           | 8.47        | Average  |
| @ 5171.500               | 34.20                 | 10.72           | 34.34                  | 88.65             | 99.23                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | I          |
| RU Configuration | 52/37         | Frequency  | TX 5180MHz |

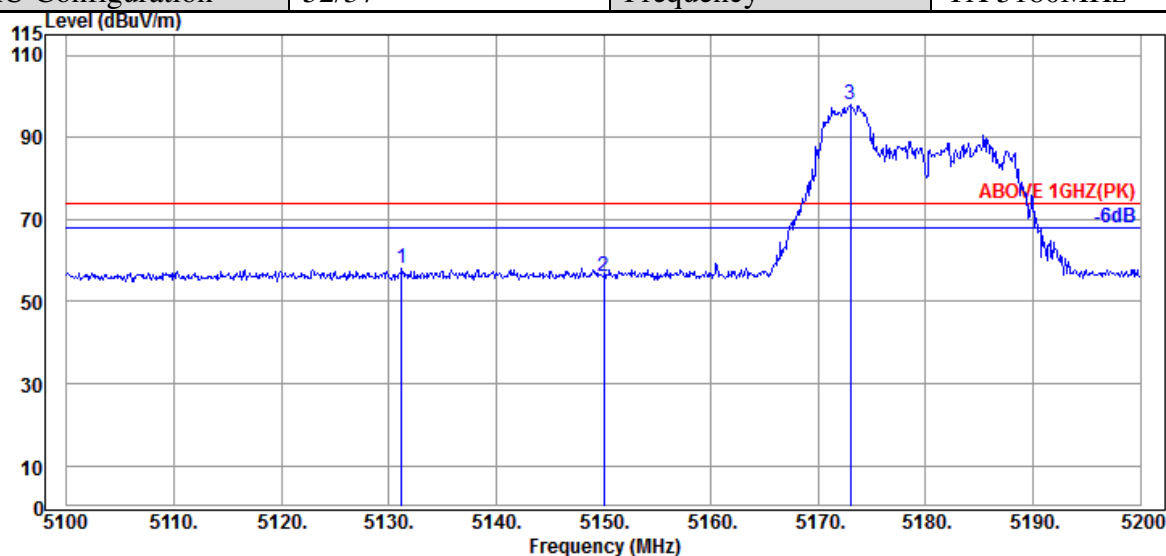

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5131.200                 | 34.17                 | 10.70           | 34.36            | 47.57             | 58.08                   | 74.00           | 15.92       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35            | 45.48             | 56.03                   | 74.00           | 17.97       | Peak     |
| @ 5173.000               | 34.20                 | 10.72           | 34.34            | 87.58             | 98.16                   | ---             | ---         | Peak     |

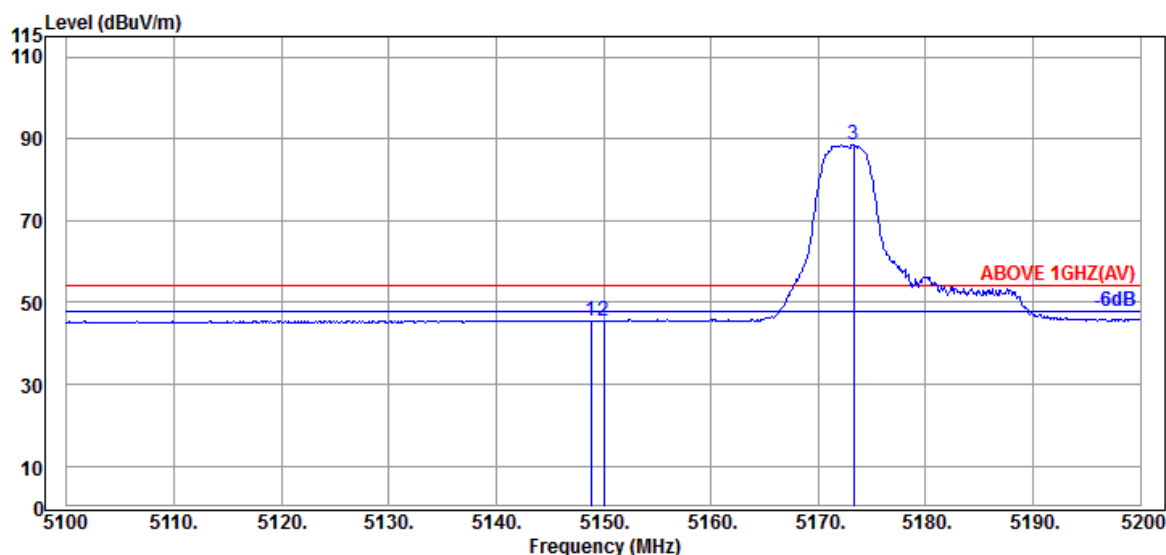

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.800                 | 34.20                 | 10.70           | 34.35            | 35.07             | 45.62                   | 54.00           | 8.38        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35            | 34.90             | 45.45                   | 54.00           | 8.55        | Average  |
| @ 5173.300               | 34.20                 | 10.72           | 34.34            | 77.90             | 88.48                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | I          |
| RU Configuration | 52/37         | Frequency  | TX 5180MHz |

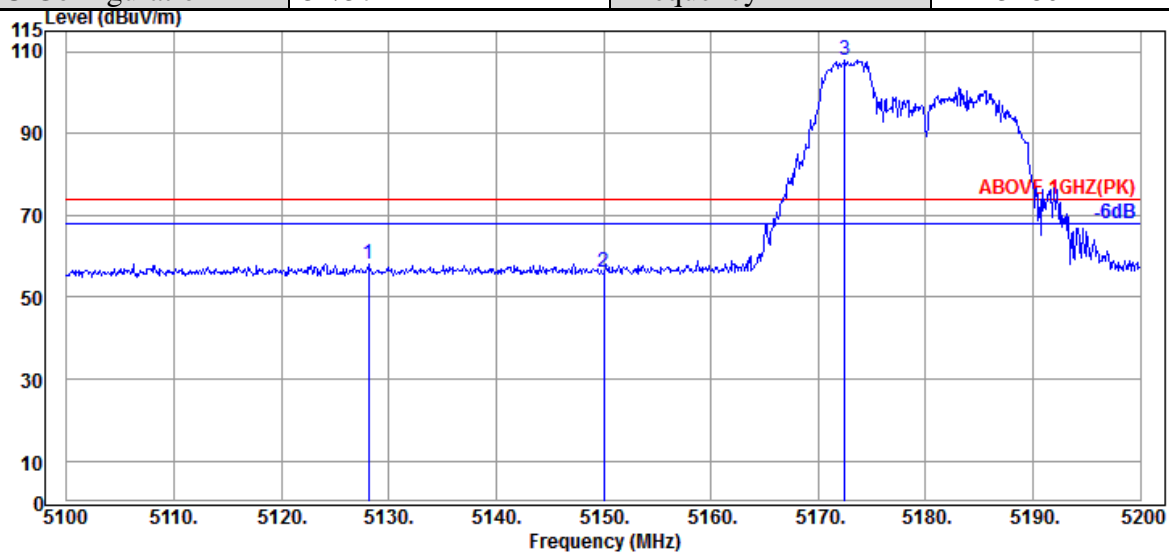

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5128.100                 | 34.17                 | 10.70           | 34.36                  | 47.58             | 58.09                   | 74.00           | 15.91       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 45.50             | 56.05                   | 74.00           | 17.95       | Peak     |
| @ 5172.500               | 34.20                 | 10.72           | 34.34                  | 97.30             | 107.88                  | ---             | ---         | Peak     |

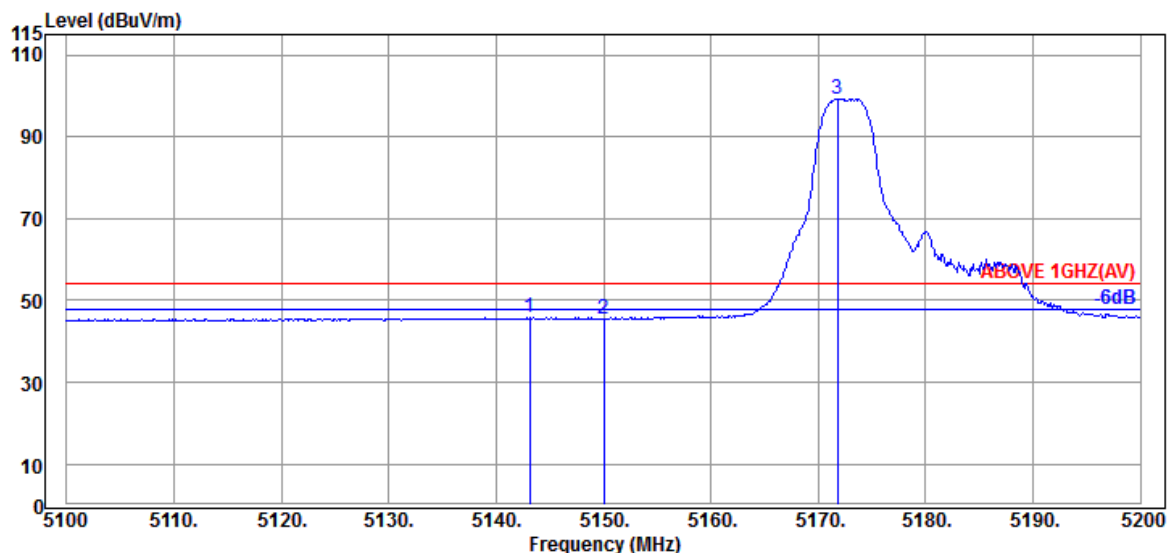


#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5143.100                 | 34.20                 | 10.70           | 34.36                  | 35.34             | 45.88                   | 54.00           | 8.12        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 35.03             | 45.58                   | 54.00           | 8.42        | Average  |
| @ 5171.800               | 34.20                 | 10.72           | 34.34                  | 88.64             | 99.22                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | I          |
| RU Configuration | 106/53        | Frequency  | TX 5180MHz |

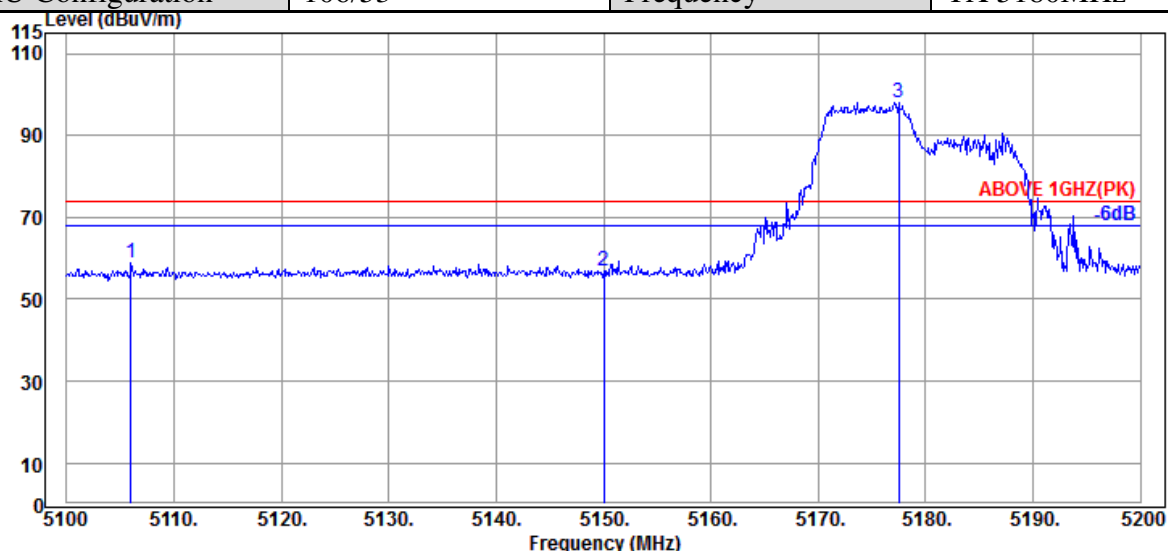

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5106.000                 | 34.10                 | 10.68           | 34.36            | 48.39             | 58.81                   | 74.00           | 15.19       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35            | 46.26             | 56.81                   | 74.00           | 17.19       | Peak     |
| @ 5177.500               | 34.20                 | 10.72           | 34.34            | 87.49             | 98.07                   | ---             | ---         | Peak     |

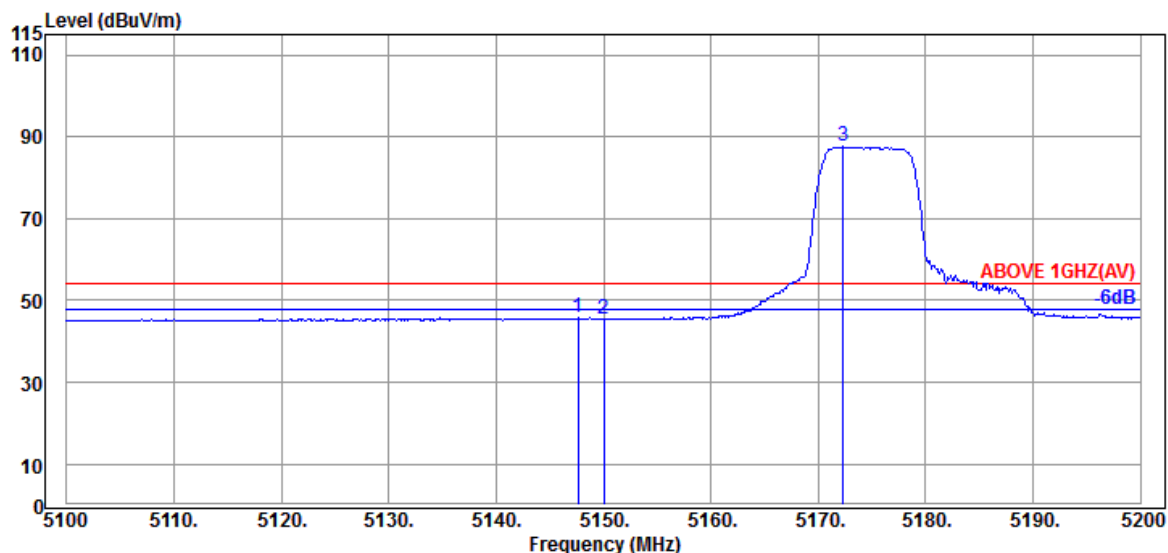

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.600                 | 34.20                 | 10.70           | 34.35            | 35.19             | 45.74                   | 54.00           | 8.26        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35            | 34.96             | 45.51                   | 54.00           | 8.49        | Average  |
| @ 5172.300               | 34.20                 | 10.72           | 34.34            | 77.11             | 87.69                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | I          |
| RU Configuration | 106/53        | Frequency  | TX 5180MHz |

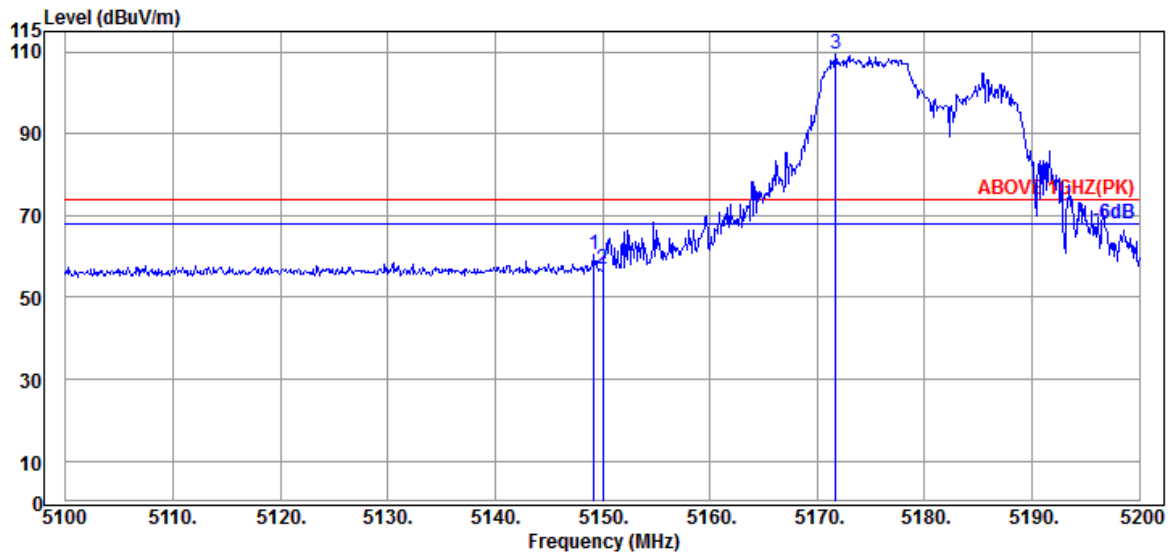

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.200                 | 34.20                 | 10.70           | 34.35                  | 49.77             | 60.32                   | 74.00           | 13.68       | Peak     |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 46.17             | 56.72                   | 74.00           | 17.28       | Peak     |
| @ 5171.700               | 34.20                 | 10.72           | 34.34                  | 98.93             | 109.51                  | ---             | ---         | Peak     |

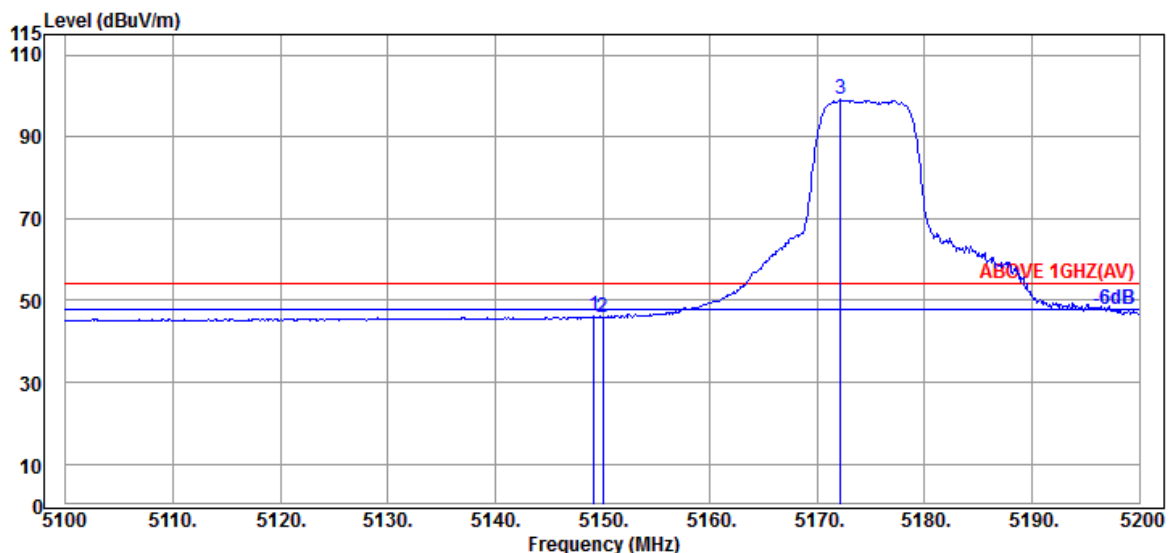

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.200                 | 34.20                 | 10.70           | 34.35                  | 35.49             | 46.04                   | 54.00           | 7.96        | Average  |
| 5150.000                 | 34.20                 | 10.70           | 34.35                  | 35.36             | 45.91                   | 54.00           | 8.09        | Average  |
| @ 5172.200               | 34.20                 | 10.72           | 34.34                  | 88.44             | 99.02                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 26/8          | Frequency  | TX 5320MHz |

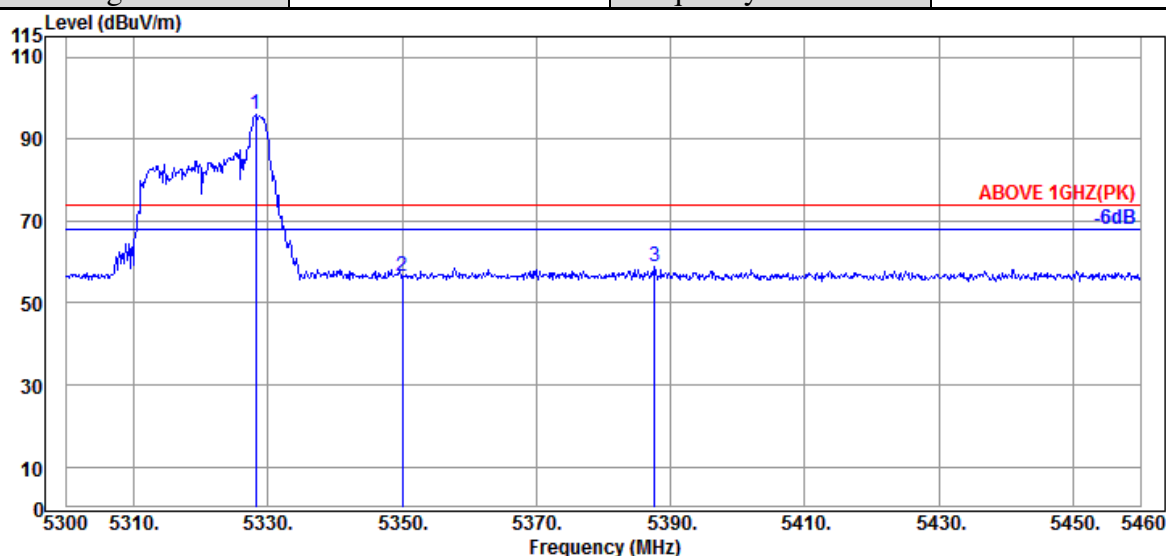

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160               | 34.57                 | 10.83           | 34.28            | 84.98             | 96.10                   | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27            | 45.45             | 56.61                   | 74.00           | 17.39       | Peak     |
| 5387.680                 | 34.70                 | 10.85           | 34.27            | 47.41             | 58.69                   | 74.00           | 15.31       | Peak     |

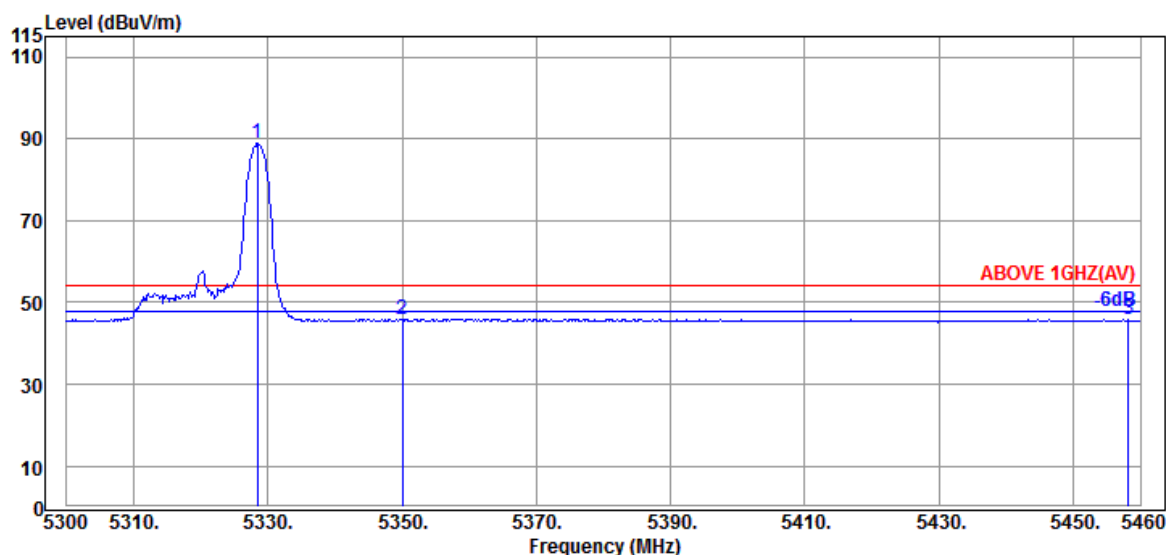


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.480               | 34.57                 | 10.83           | 34.28            | 77.70             | 88.82                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27            | 34.67             | 45.83                   | 54.00           | 8.17        | Average  |
| 5458.240                 | 34.50                 | 10.89           | 34.24            | 34.78             | 45.93                   | 54.00           | 8.07        | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 26/8          | Frequency  | TX 5320MHz |

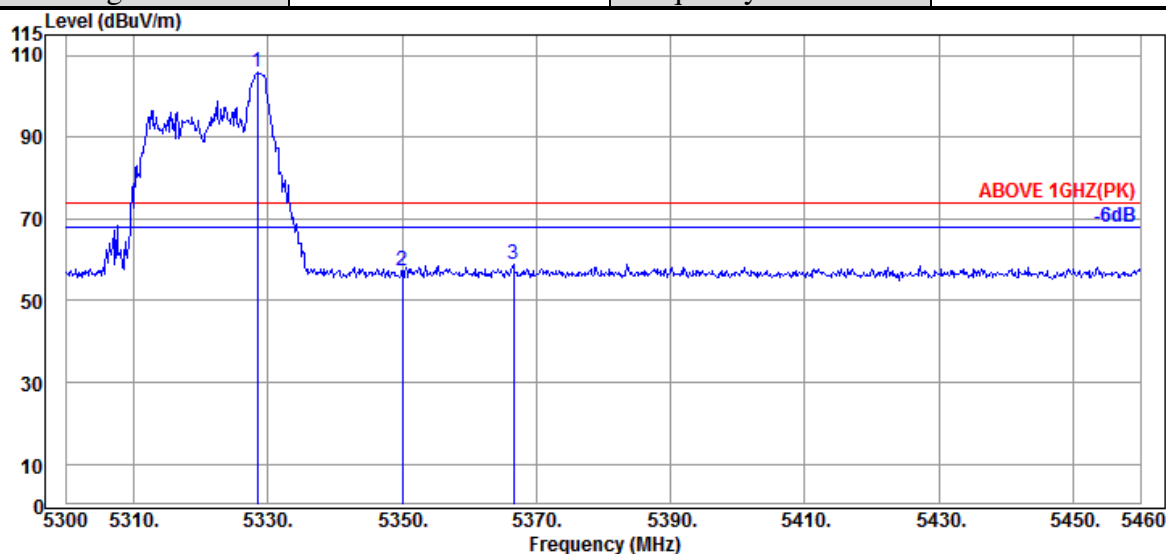

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.480               | 34.57                 | 10.83           | 34.28                  | 94.68             | 105.80                  | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 46.18             | 57.34                   | 74.00           | 16.66       | Peak     |
| 5366.560                 | 34.63                 | 10.85           | 34.27                  | 47.86             | 59.07                   | 74.00           | 14.93       | Peak     |

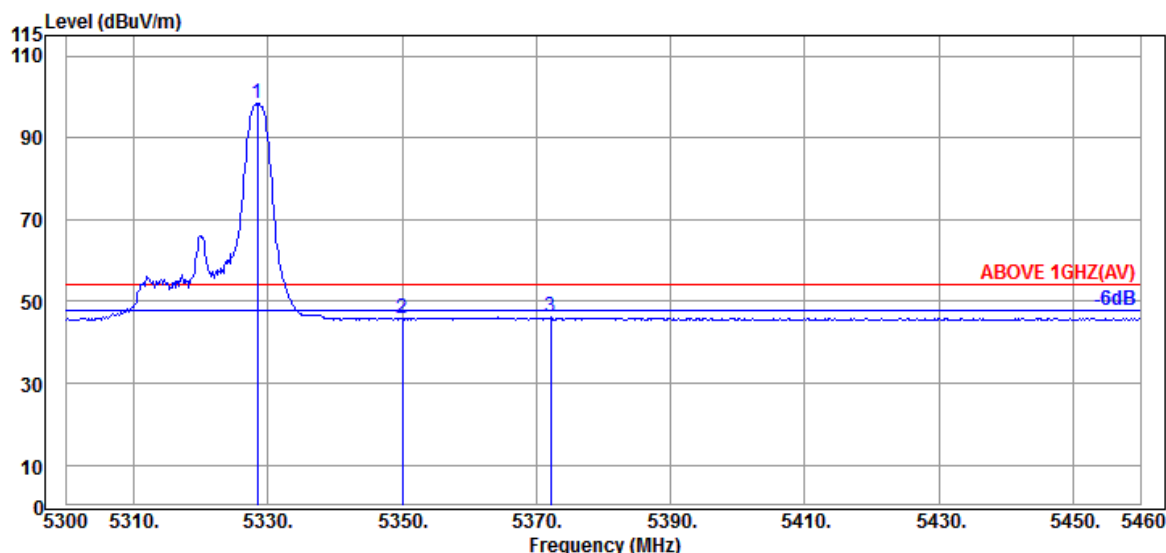

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.480               | 34.57                 | 10.83           | 34.28                  | 87.34             | 98.46                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 34.52             | 45.68                   | 54.00           | 8.32        | Average  |
| 5372.160                 | 34.67                 | 10.85           | 34.27                  | 34.91             | 46.16                   | 54.00           | 7.84        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 52/40         | Frequency  | TX 5320MHz |

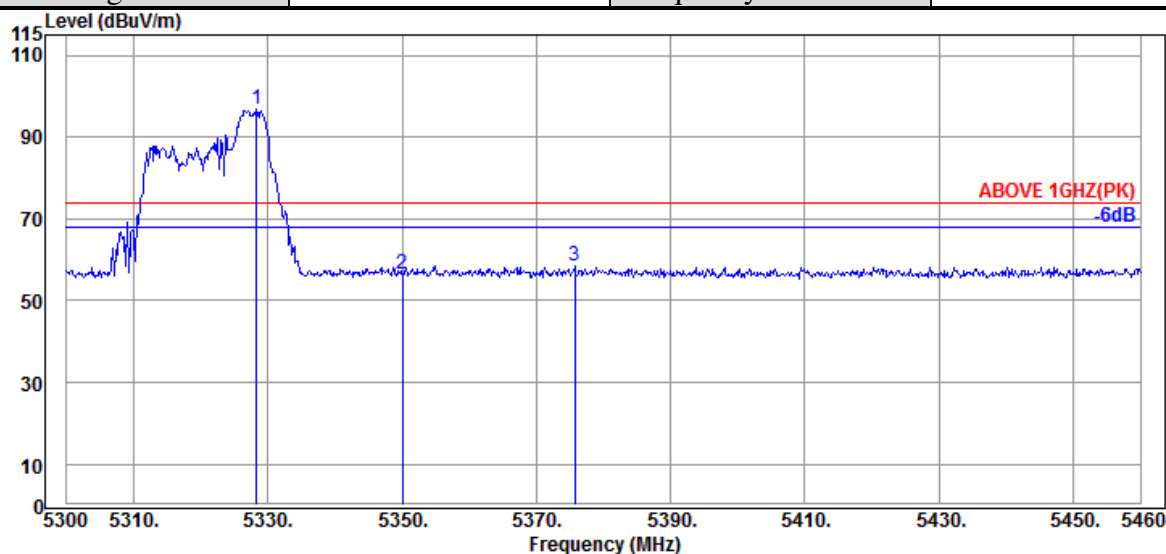

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.320               | 34.57                 | 10.83           | 34.28                  | 85.87             | 96.99                   | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 45.41             | 56.57                   | 74.00           | 17.43       | Peak     |
| 5375.680                 | 34.67                 | 10.85           | 34.27                  | 47.43             | 58.68                   | 74.00           | 15.32       | Peak     |

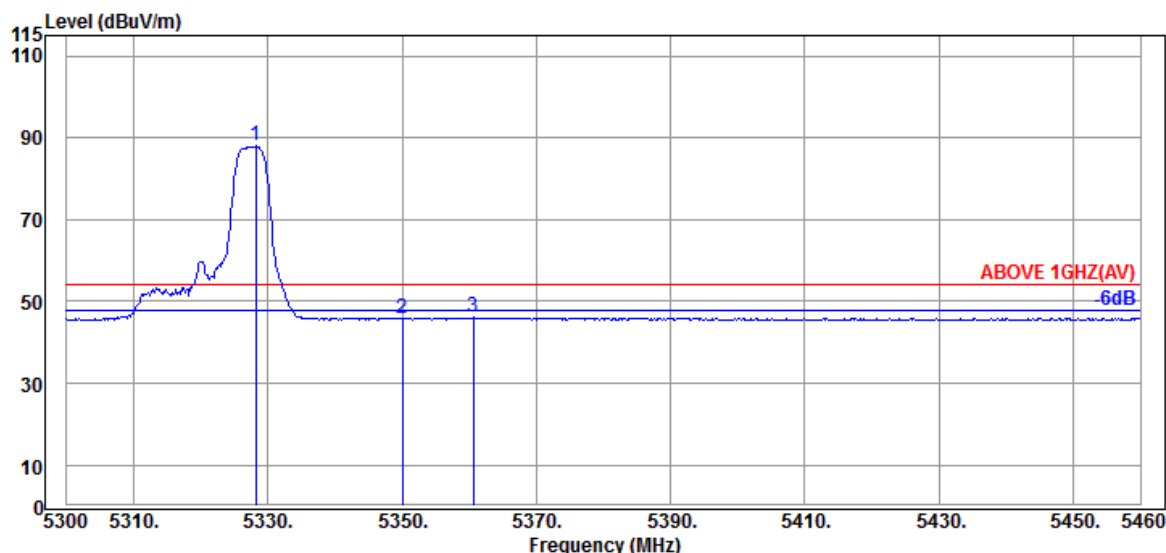

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160               | 34.57                 | 10.83           | 34.28                  | 76.83             | 87.95                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 34.58             | 45.74                   | 54.00           | 8.26        | Average  |
| 5360.640                 | 34.63                 | 10.85           | 34.27                  | 34.89             | 46.10                   | 54.00           | 7.90        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 52/40         | Frequency  | TX 5320MHz |

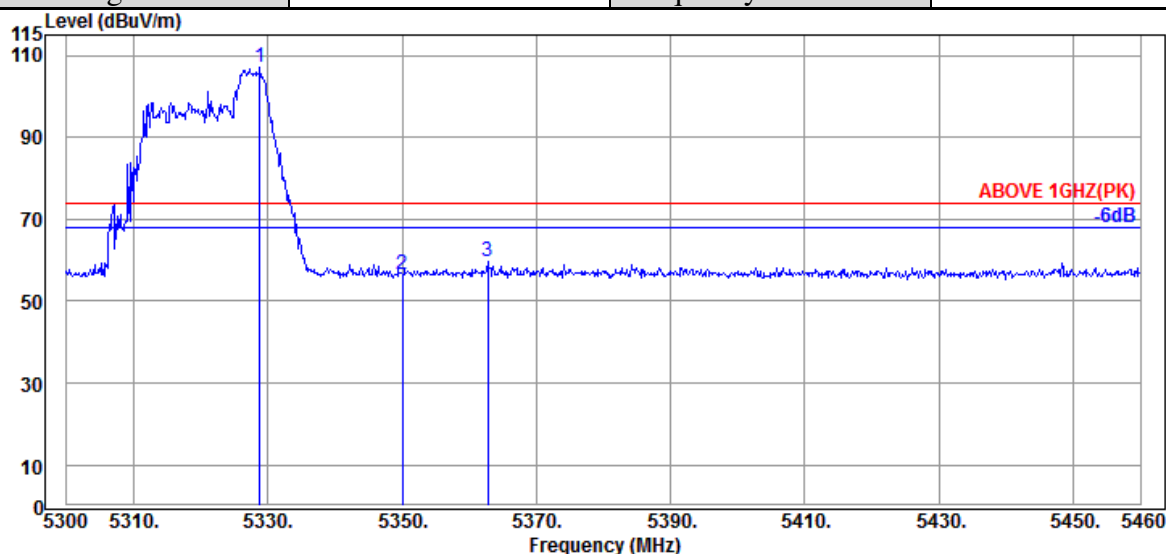

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.800               | 34.57                 | 10.83           | 34.28                  | 95.98             | 107.10                  | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 45.30             | 56.46                   | 74.00           | 17.54       | Peak     |
| 5362.720                 | 34.63                 | 10.85           | 34.27                  | 48.50             | 59.71                   | 74.00           | 14.29       | Peak     |

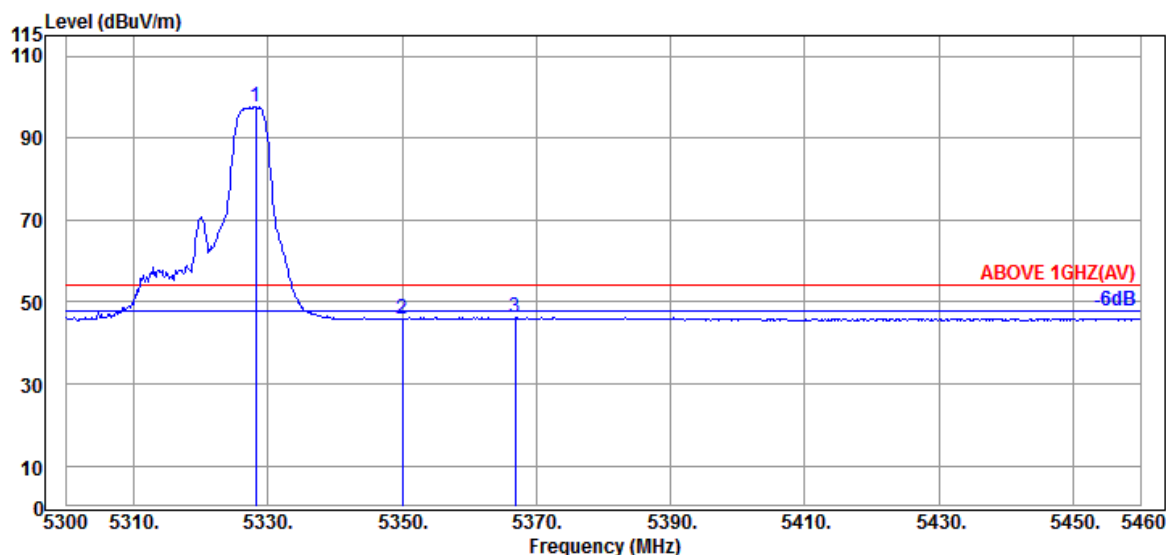

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160               | 34.57                 | 10.83           | 34.28                  | 86.68             | 97.80                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 34.79             | 45.95                   | 54.00           | 8.05        | Average  |
| 5366.880                 | 34.63                 | 10.85           | 34.27                  | 34.98             | 46.19                   | 54.00           | 7.81        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 106/54        | Frequency  | TX 5320MHz |

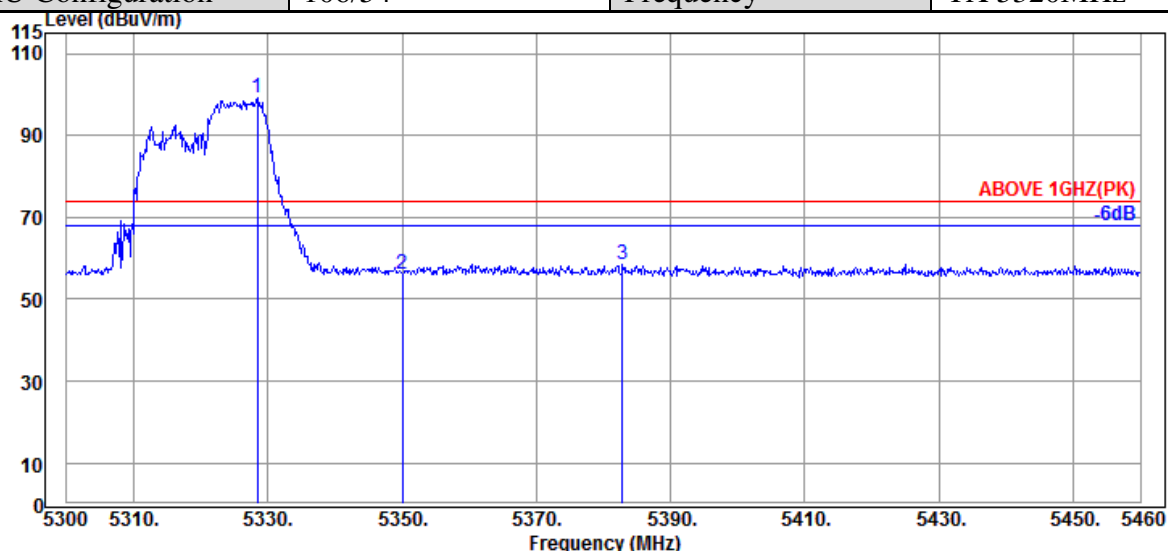

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.480               | 34.57                 | 10.83           | 34.28                  | 88.04             | 99.16                   | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 45.12             | 56.28                   | 74.00           | 17.72       | Peak     |
| 5382.880                 | 34.67                 | 10.85           | 34.27                  | 47.26             | 58.51                   | 74.00           | 15.49       | Peak     |

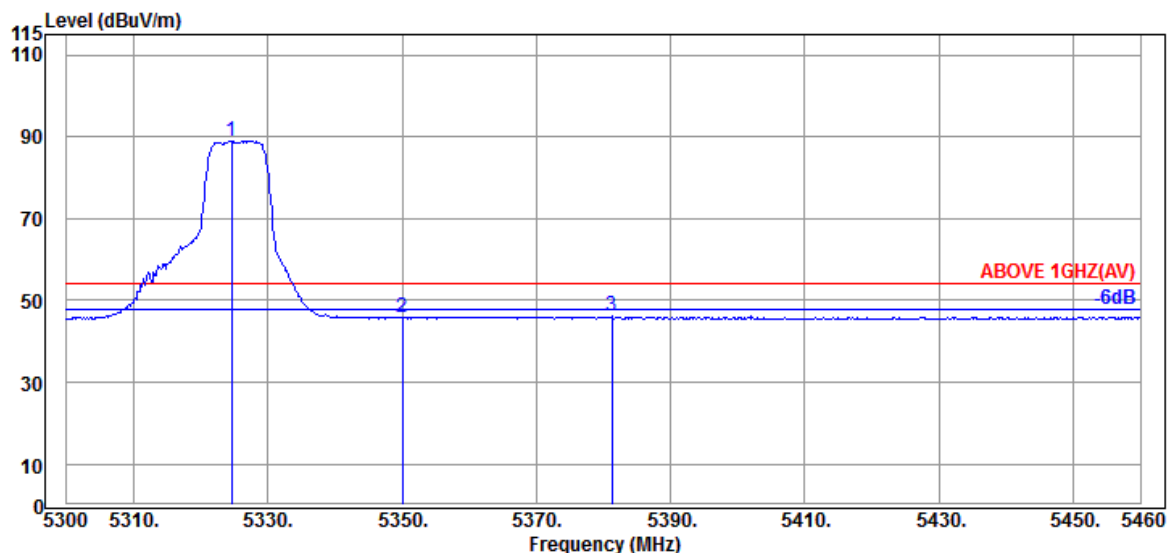

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5324.640               | 34.57                 | 10.83           | 34.28                  | 77.89             | 89.01                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 34.60             | 45.76                   | 54.00           | 8.24        | Average  |
| 5381.280                 | 34.67                 | 10.85           | 34.27                  | 34.81             | 46.06                   | 54.00           | 7.94        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2A         |
| RU Configuration | 106/54        | Frequency  | TX 5320MHz |

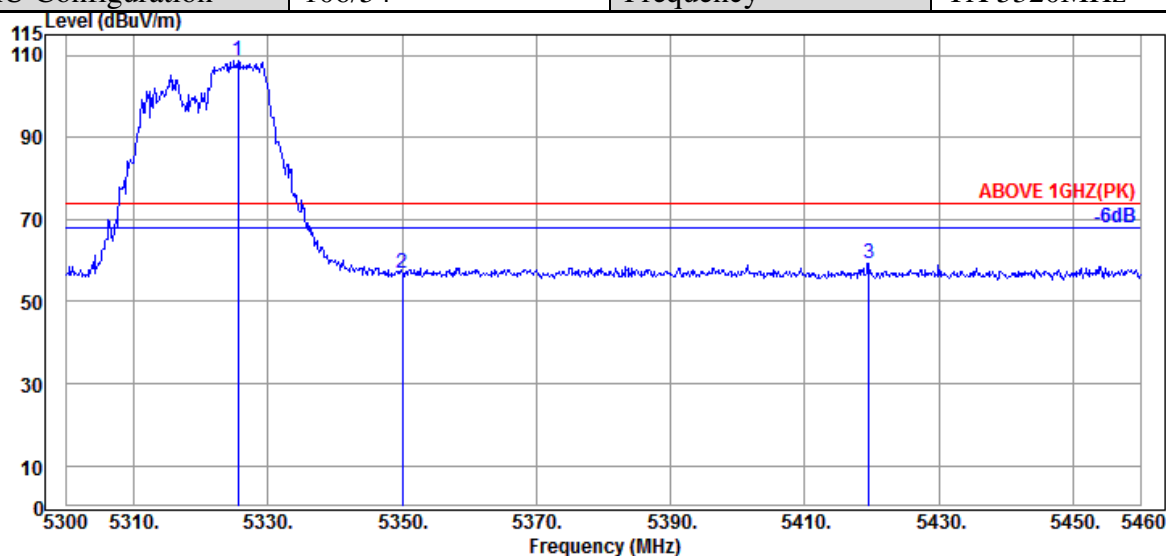

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5325.600               | 34.57                 | 10.83           | 34.28                  | 97.71             | 108.83                  | ---             | ---         | Peak     |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 45.63             | 56.79                   | 74.00           | 17.21       | Peak     |
| 5419.520                 | 34.60                 | 10.87           | 34.26                  | 48.01             | 59.22                   | 74.00           | 14.78       | Peak     |

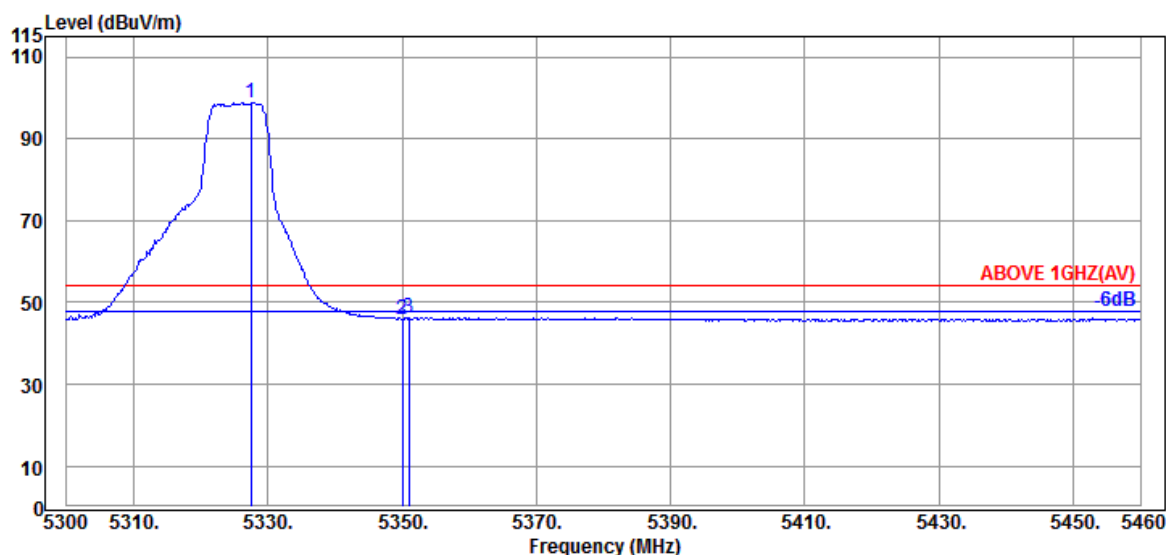

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.520               | 34.57                 | 10.83           | 34.28                  | 87.69             | 98.81                   | ---             | ---         | Average  |
| 5350.080                 | 34.60                 | 10.83           | 34.27                  | 34.88             | 46.04                   | 54.00           | 7.96        | Average  |
| 5351.040                 | 34.60                 | 10.83           | 34.27                  | 35.02             | 46.18                   | 54.00           | 7.82        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 26/0          | Frequency  | TX 5500MHz |

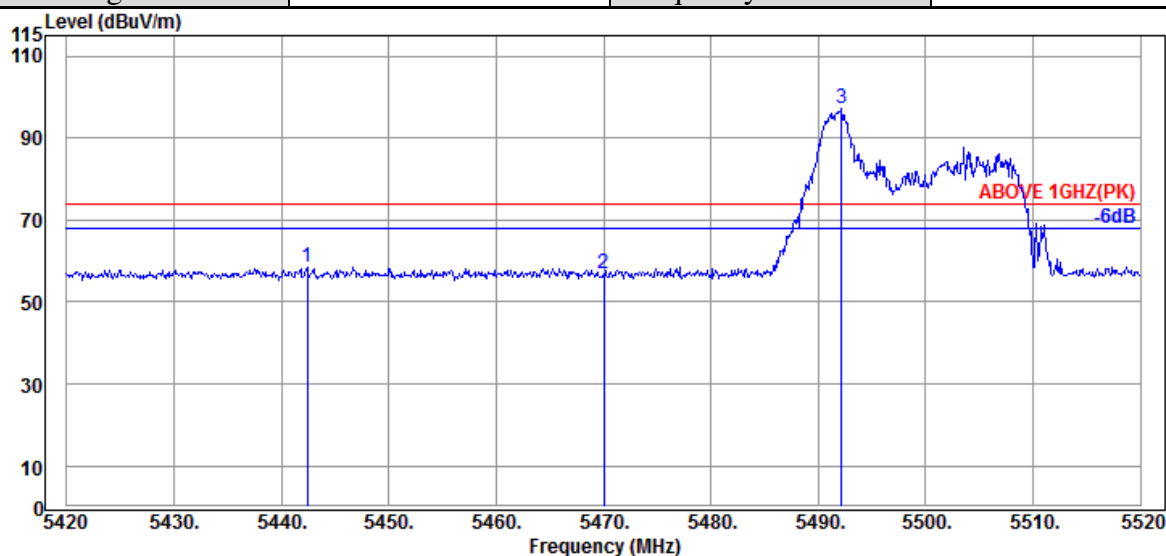

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5442.400                 | 34.55                 | 10.89           | 34.25                  | 47.26             | 58.45                   | 74.00           | 15.55       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 45.79             | 56.93                   | 74.00           | 17.07       | Peak     |
| @ 5492.200               | 34.43                 | 10.91           | 34.23                  | 85.98             | 97.09                   | ---             | ---         | Peak     |

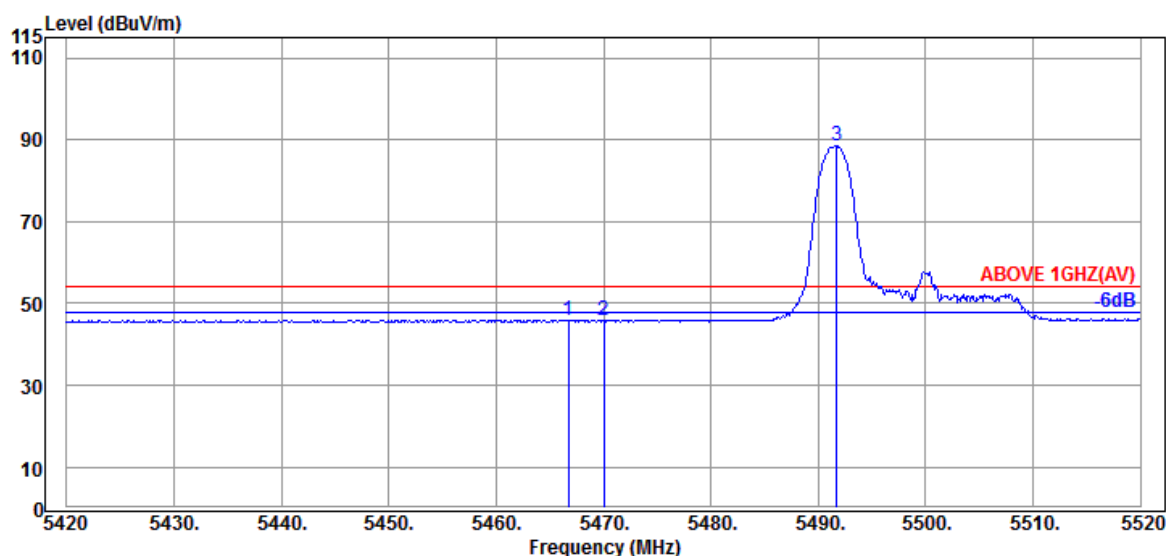

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.700                 | 34.47                 | 10.91           | 34.24                  | 34.77             | 45.91                   | 54.00           | 8.09        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 34.66             | 45.80                   | 54.00           | 8.20        | Average  |
| @ 5491.700               | 34.43                 | 10.91           | 34.23                  | 77.39             | 88.50                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 26/0          | Frequency  | TX 5500MHz |

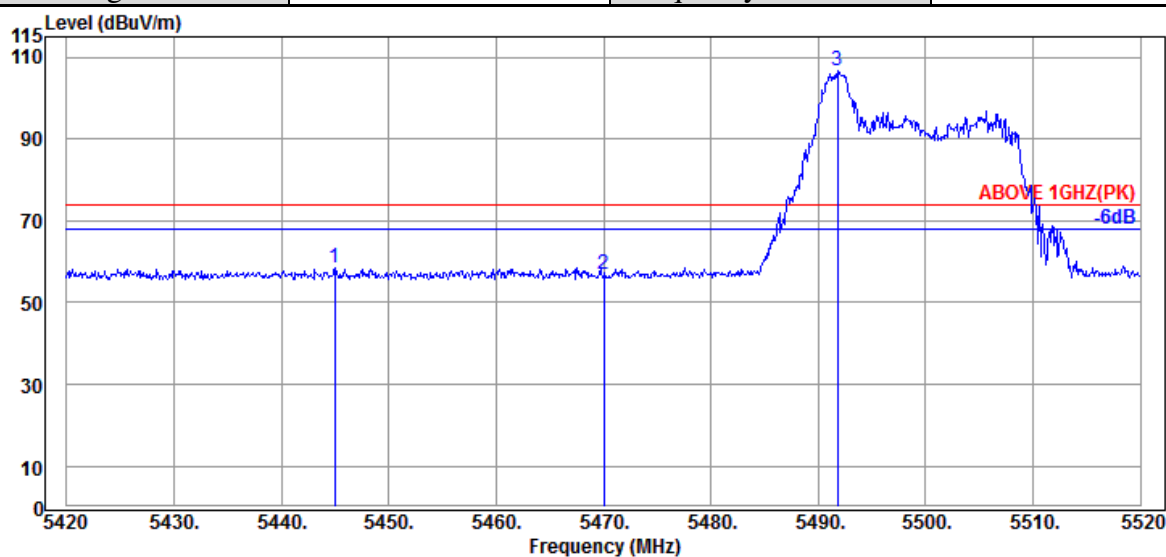

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5445.000                 | 34.55                 | 10.89           | 34.25                  | 47.24             | 58.43                   | 74.00           | 15.57       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 45.59             | 56.73                   | 74.00           | 17.27       | Peak     |
| @ 5491.800               | 34.43                 | 10.91           | 34.23                  | 95.52             | 106.63                  | ---             | ---         | Peak     |

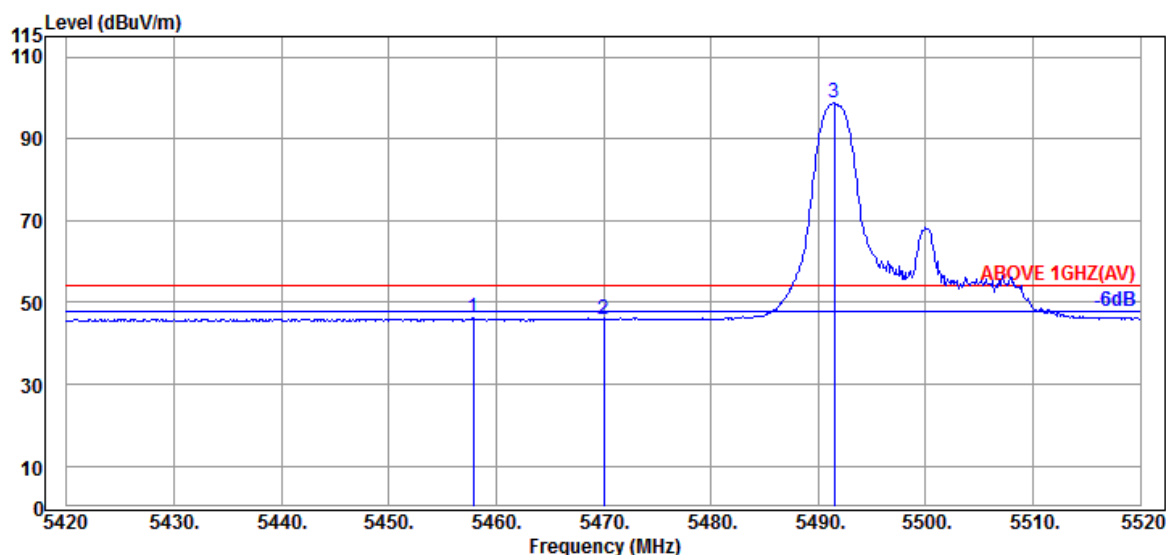

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.900                 | 34.50                 | 10.89           | 34.24                  | 34.97             | 46.12                   | 54.00           | 7.88        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 34.90             | 46.04                   | 54.00           | 7.96        | Average  |
| @ 5491.500               | 34.43                 | 10.91           | 34.23                  | 87.56             | 98.67                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section..

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 52/37         | Frequency  | TX 5500MHz |

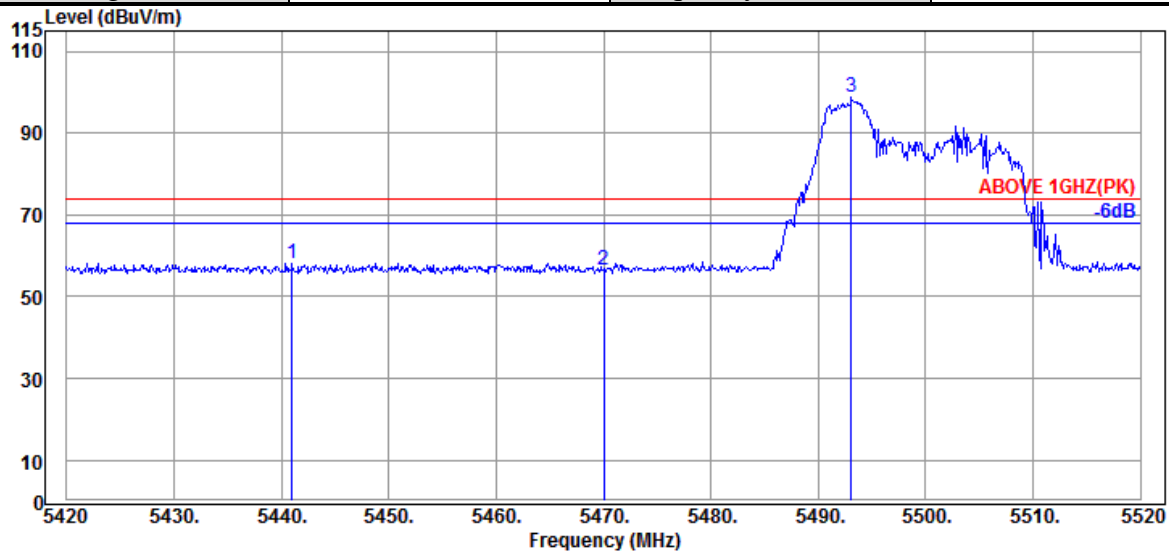

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5441.000                 | 34.55                 | 10.89           | 34.25            | 47.02             | 58.21                   | 74.00           | 15.79       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 45.53             | 56.67                   | 74.00           | 17.33       | Peak     |
| @ 5493.100               | 34.43                 | 10.91           | 34.23            | 87.57             | 98.68                   | ---             | ---         | Peak     |

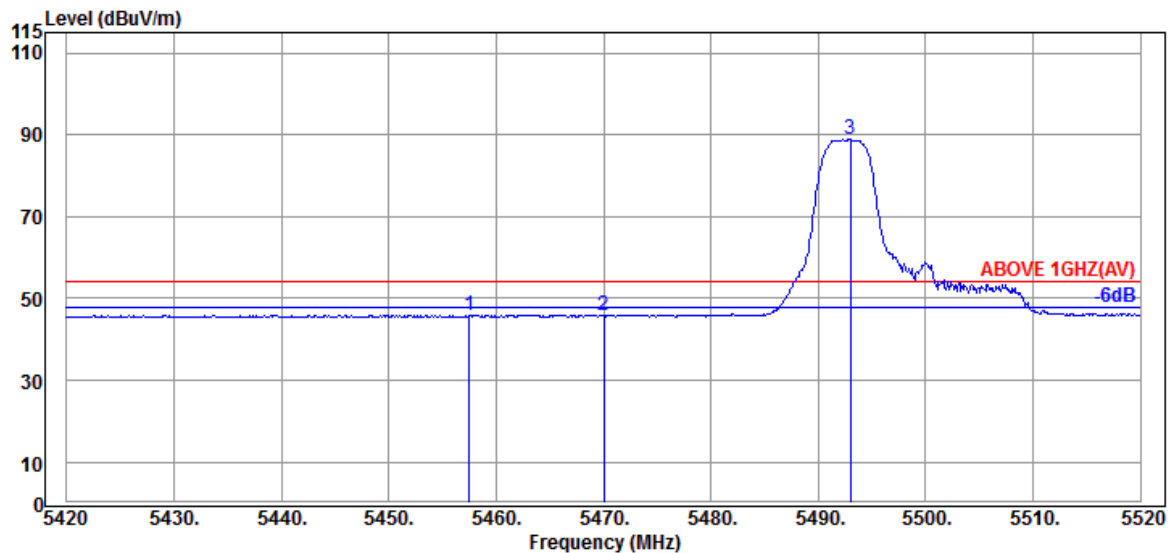


## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.500                 | 34.50                 | 10.89           | 34.24            | 34.83             | 45.98                   | 54.00           | 8.02        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 34.56             | 45.70                   | 54.00           | 8.30        | Average  |
| @ 5493.000               | 34.43                 | 10.91           | 34.23            | 77.80             | 88.91                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 52/37         | Frequency  | TX 5500MHz |

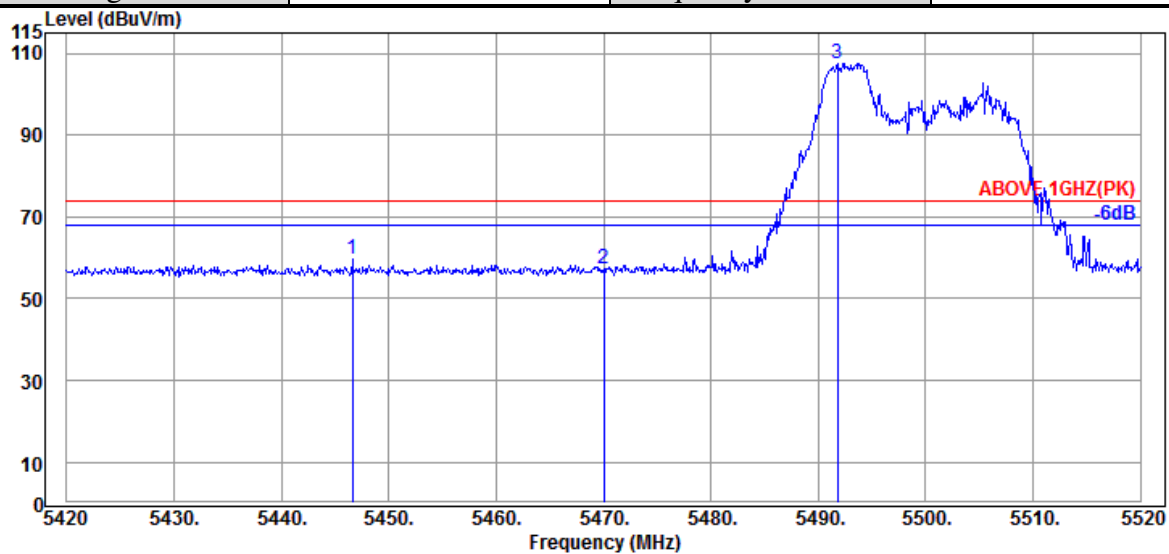

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV/m) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|---------------------|-------------------------|-----------------|-------------|----------|
| 5446.600                 | 34.55                 | 10.89           | 34.25                  | 48.48               | 59.67                   | 74.00           | 14.33       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 46.25               | 57.39                   | 74.00           | 16.61       | Peak     |
| @ 5491.800               | 34.43                 | 10.91           | 34.23                  | 96.47               | 107.58                  | ---             | ---         | Peak     |

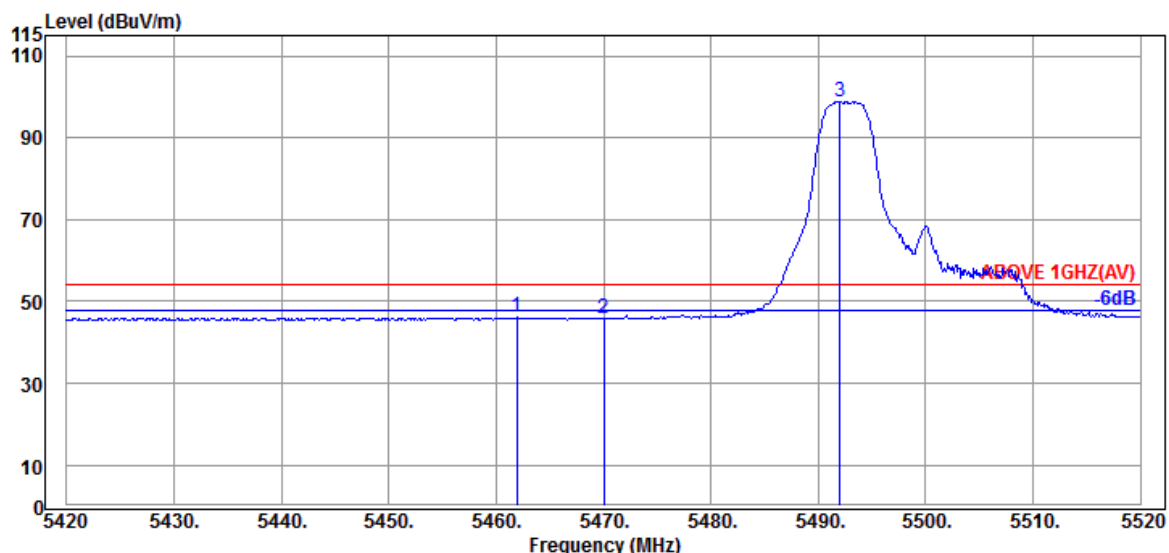

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV/m) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|---------------------|-------------------------|-----------------|-------------|----------|
| 5461.900                 | 34.50                 | 10.91           | 34.24                  | 34.90               | 46.07                   | 54.00           | 7.93        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 34.68               | 45.82                   | 54.00           | 8.18        | Average  |
| @ 5492.000               | 34.43                 | 10.91           | 34.23                  | 87.76               | 98.87                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 106/53        | Frequency  | TX 5500MHz |

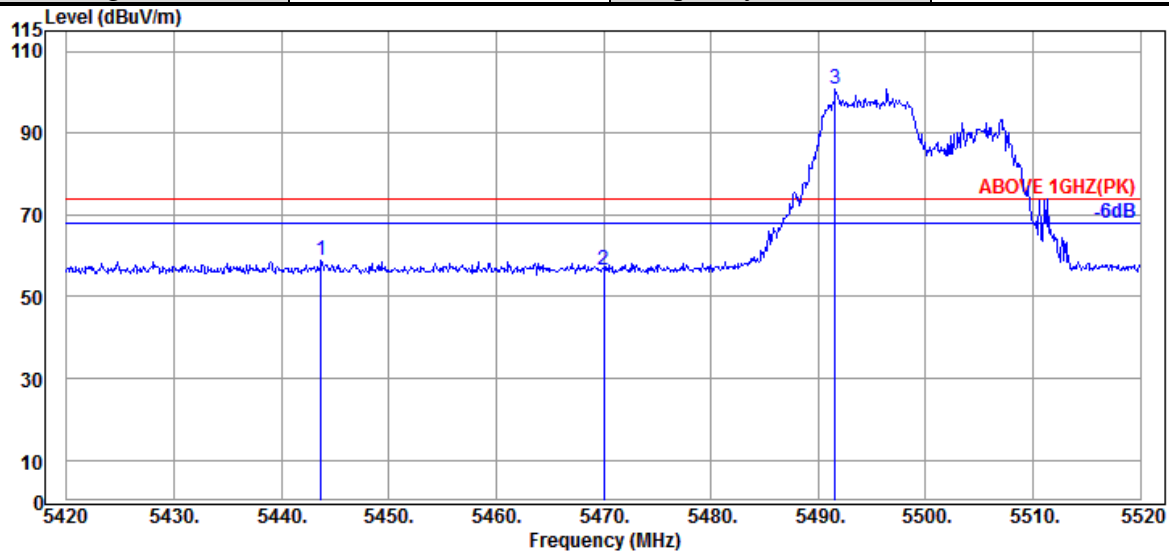

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5443.700                 | 34.55                 | 10.89           | 34.25                  | 47.62             | 58.81                   | 74.00           | 15.19       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 45.55             | 56.69                   | 74.00           | 17.31       | Peak     |
| @ 5491.600               | 34.43                 | 10.91           | 34.23                  | 89.58             | 100.69                  | ---             | ---         | Peak     |

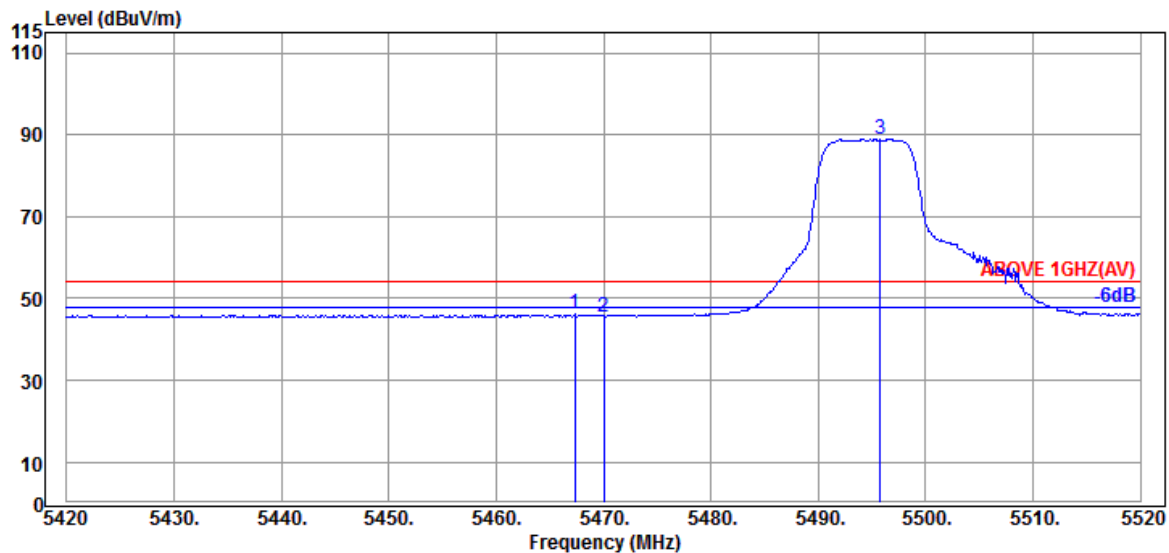

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.300                 | 34.47                 | 10.91           | 34.24                  | 34.92             | 46.06                   | 54.00           | 7.94        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 34.45             | 45.59                   | 54.00           | 8.41        | Average  |
| @ 5495.800               | 34.40                 | 10.93           | 34.23                  | 77.83             | 88.93                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 106/53        | Frequency  | TX 5500MHz |

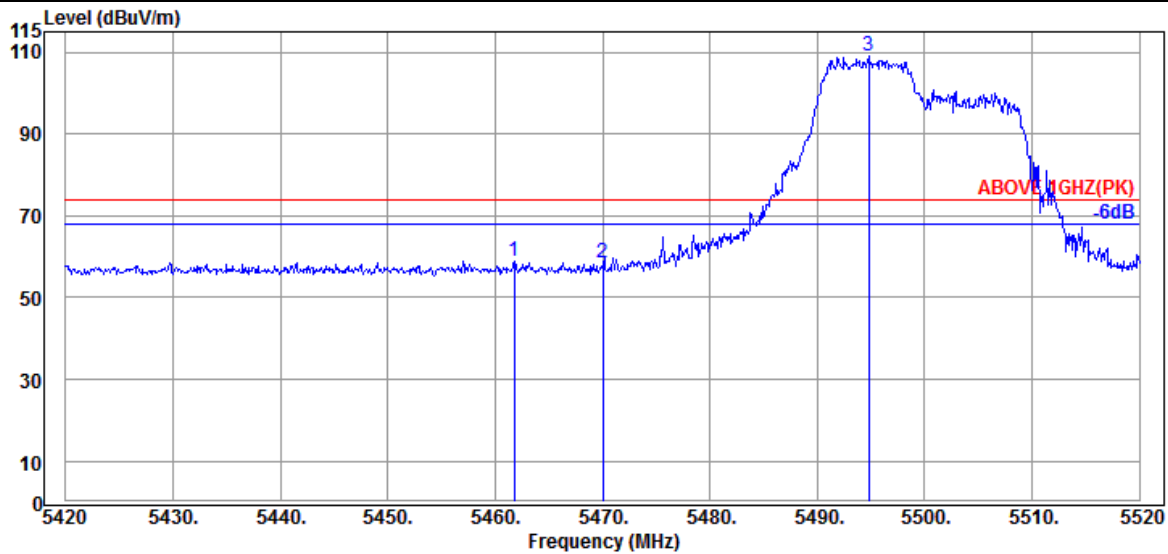

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5461.800                 | 34.50                 | 10.91           | 34.24                  | 47.74             | 58.91                   | 74.00           | 15.09       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 47.51             | 58.65                   | 74.00           | 15.35       | Peak     |
| @ 5494.800               | 34.43                 | 10.93           | 34.23                  | 98.08             | 109.21                  | ---             | ---         | Peak     |

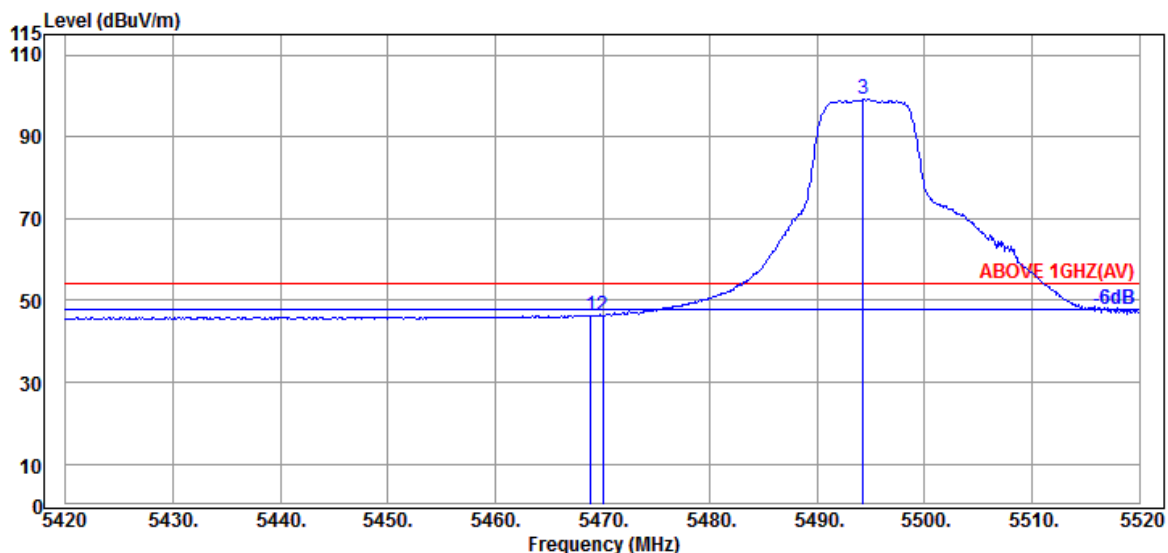

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.900                 | 34.47                 | 10.91           | 34.24                  | 35.24             | 46.38                   | 54.00           | 7.62        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 35.14             | 46.28                   | 54.00           | 7.72        | Average  |
| @ 5494.300               | 34.43                 | 10.91           | 34.23                  | 87.98             | 99.09                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 26/8          | Frequency  | TX 5700MHz |

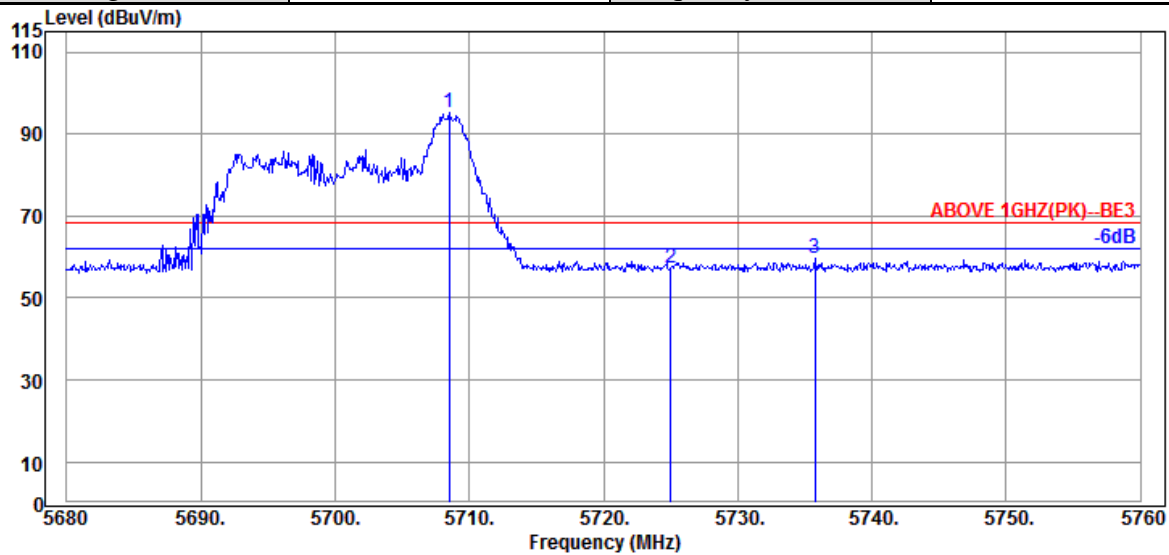

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.480               | 34.53                 | 11.03           | 34.32            | 83.85             | 95.09                   | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32            | 45.94             | 57.34                   | 68.20           | 10.86       | Peak     |
| 5735.760                 | 34.67                 | 11.05           | 34.33            | 48.10             | 59.49                   | 68.20           | 8.71        | Peak     |

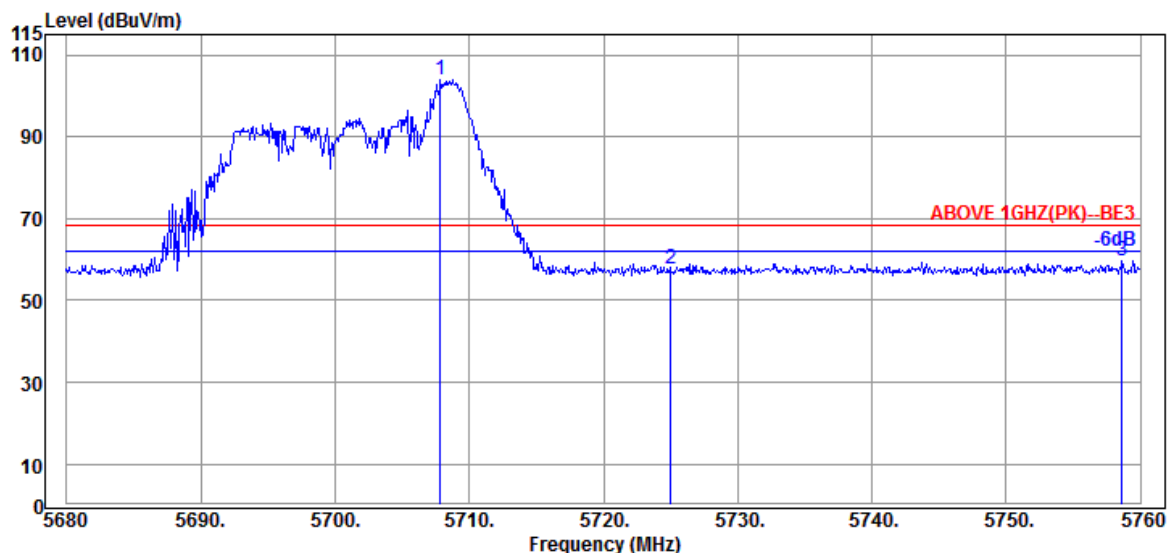

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5707.840               | 34.53                 | 11.03           | 34.32            | 92.54             | 103.78                  | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32            | 46.15             | 57.55                   | 68.20           | 10.65       | Peak     |
| 5758.640                 | 34.87                 | 11.06           | 34.35            | 48.15             | 59.73                   | 68.20           | 8.47        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 52/40         | Frequency  | TX 5700MHz |

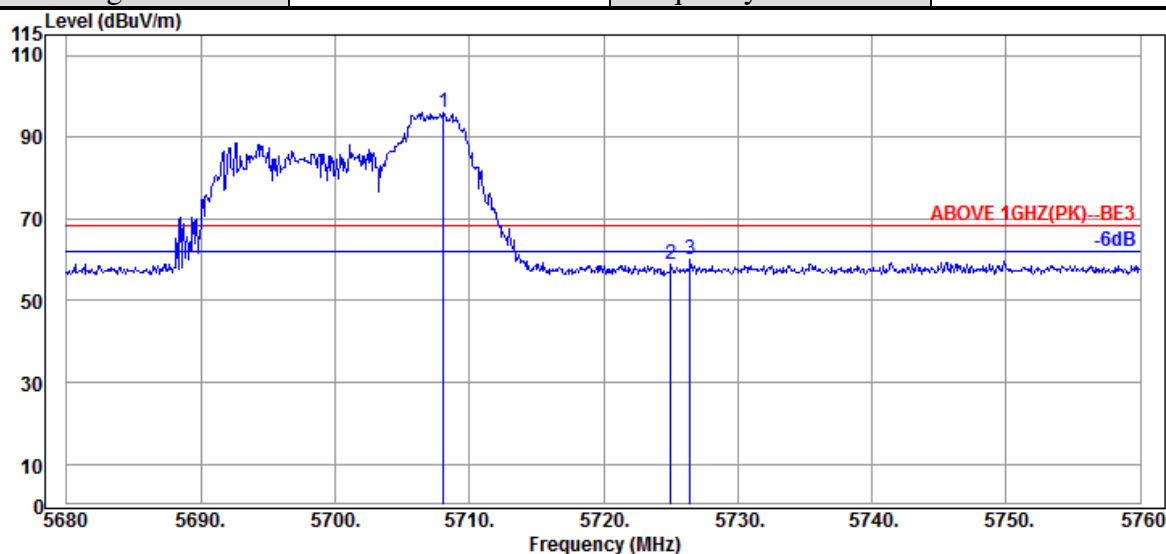

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.080               | 34.53                 | 11.03           | 34.32                  | 84.89             | 96.13                   | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32                  | 47.35             | 58.75                   | 68.20           | 9.45        | Peak     |
| 5726.480                 | 34.67                 | 11.05           | 34.32                  | 48.48             | 59.88                   | 68.20           | 8.32        | Peak     |

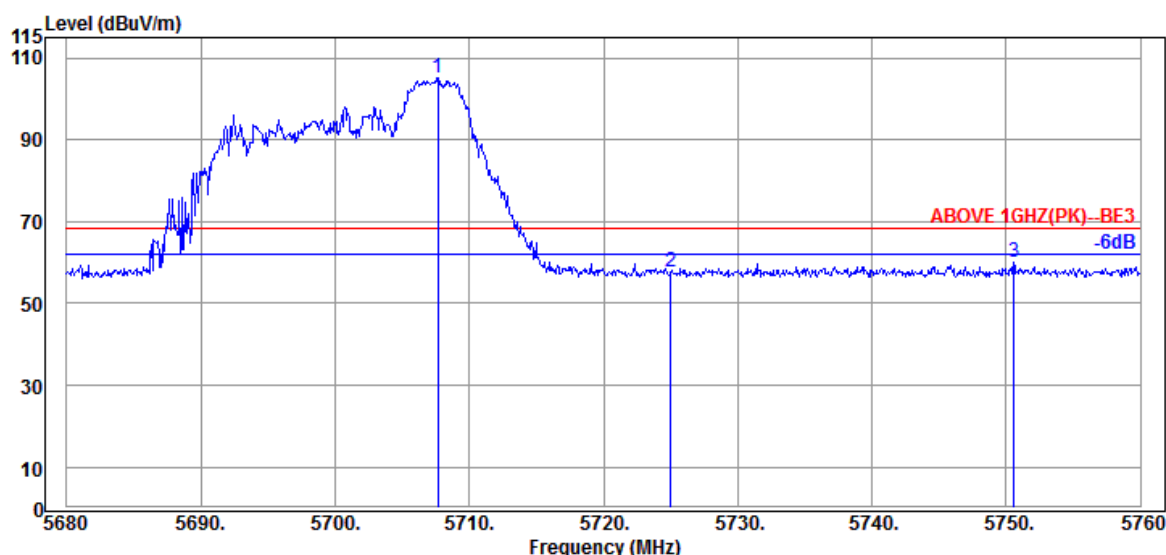

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5707.680               | 34.53                 | 11.03           | 34.32                  | 93.92             | 105.16                  | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32                  | 46.18             | 57.58                   | 68.20           | 10.62       | Peak     |
| 5750.560                 | 34.80                 | 11.06           | 34.33                  | 48.34             | 59.87                   | 68.20           | 8.33        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | 2C         |
| RU Configuration | 106/54        | Frequency  | TX 5700MHz |

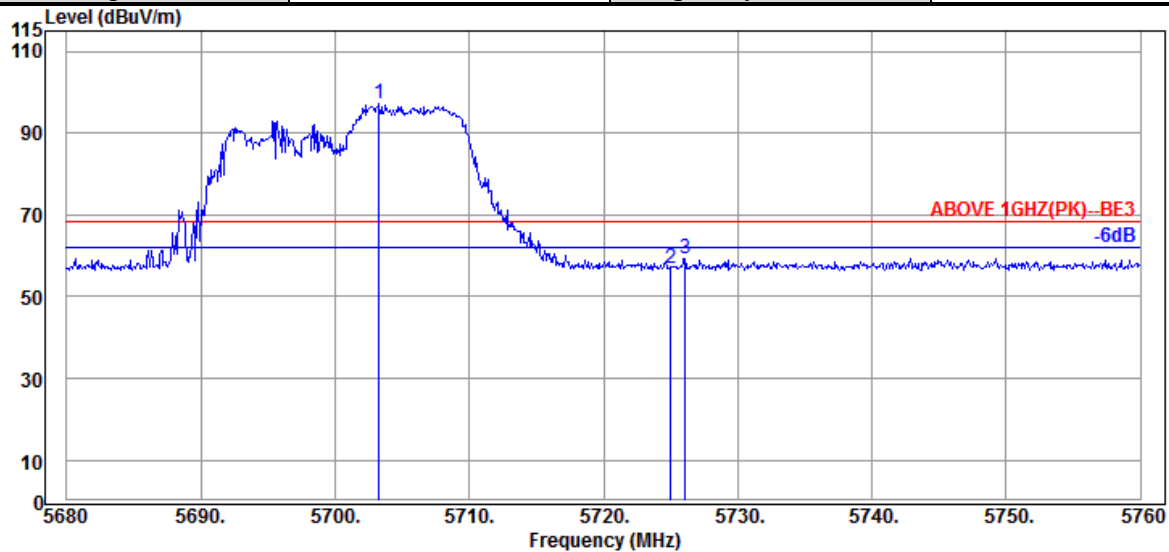

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5703.280               | 34.40                 | 11.03           | 34.31            | 86.12             | 97.24                   | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32            | 45.34             | 56.74                   | 68.20           | 11.46       | Peak     |
| 5726.080                 | 34.67                 | 11.05           | 34.32            | 47.88             | 59.28                   | 68.20           | 8.92        | Peak     |

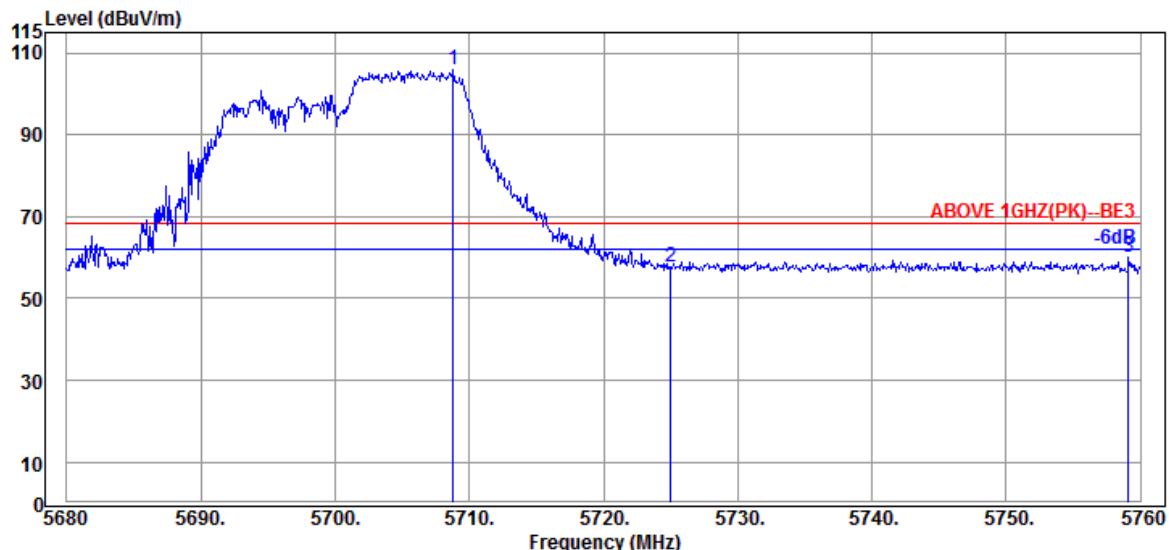

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.800               | 34.53                 | 11.03           | 34.32            | 94.53             | 105.77                  | ---             | ---         | Peak     |
| 5725.040                 | 34.67                 | 11.05           | 34.32            | 46.24             | 57.64                   | 68.20           | 10.56       | Peak     |
| 5759.120                 | 34.87                 | 11.06           | 34.35            | 48.56             | 60.14                   | 68.20           | 8.06        | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | III        |
| RU Configuration | 26/0          | Frequency  | TX 5745MHz |

### Antenna at Horizontal Polarization

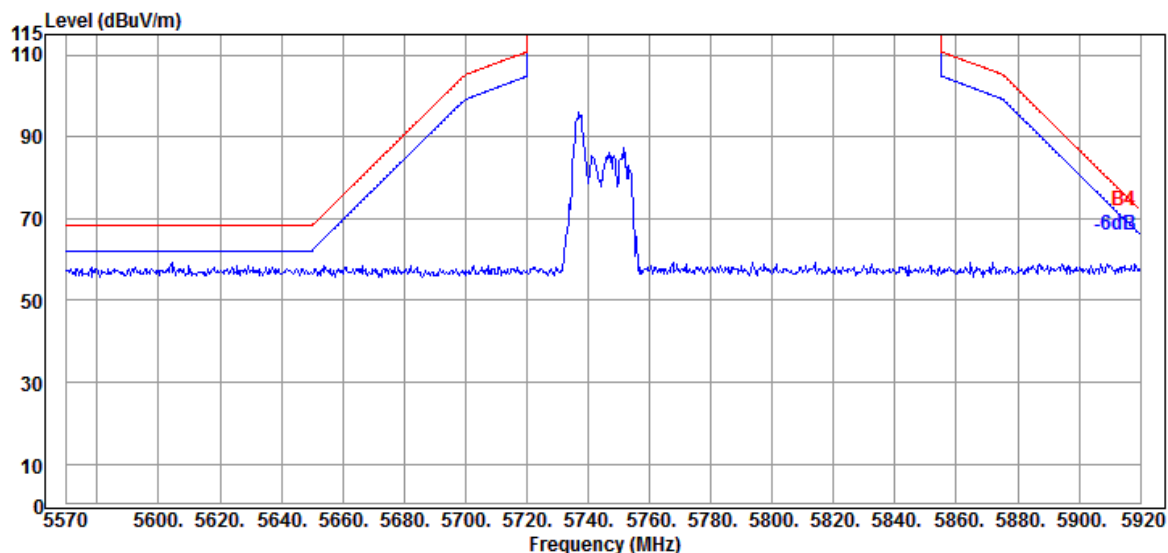

### Antenna at Vertical Polarization

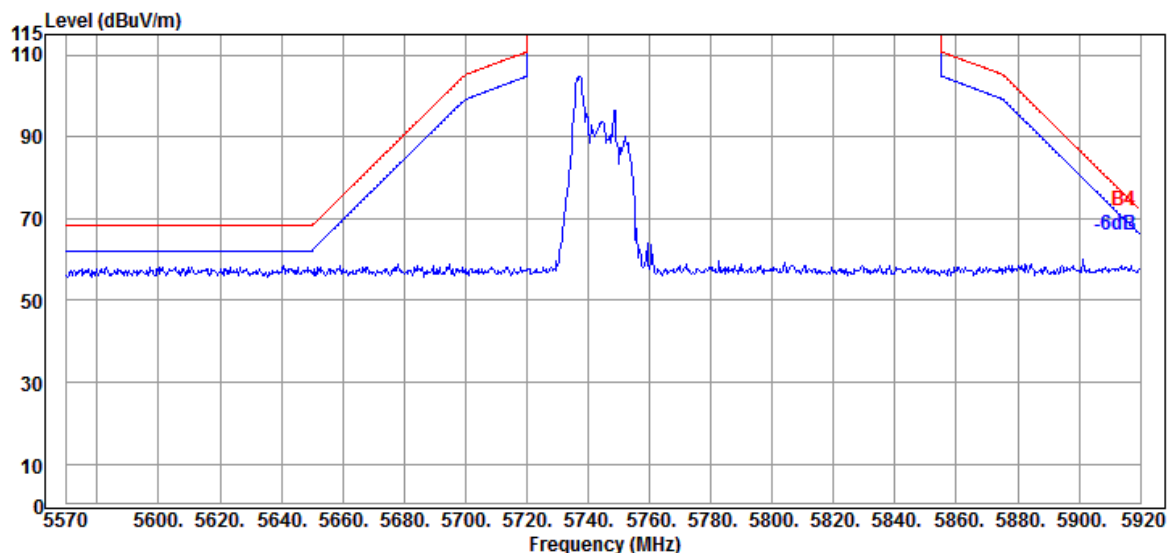


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | III        |
| RU Configuration | 52/37         | Frequency  | TX 5745MHz |

### Antenna at Horizontal Polarization

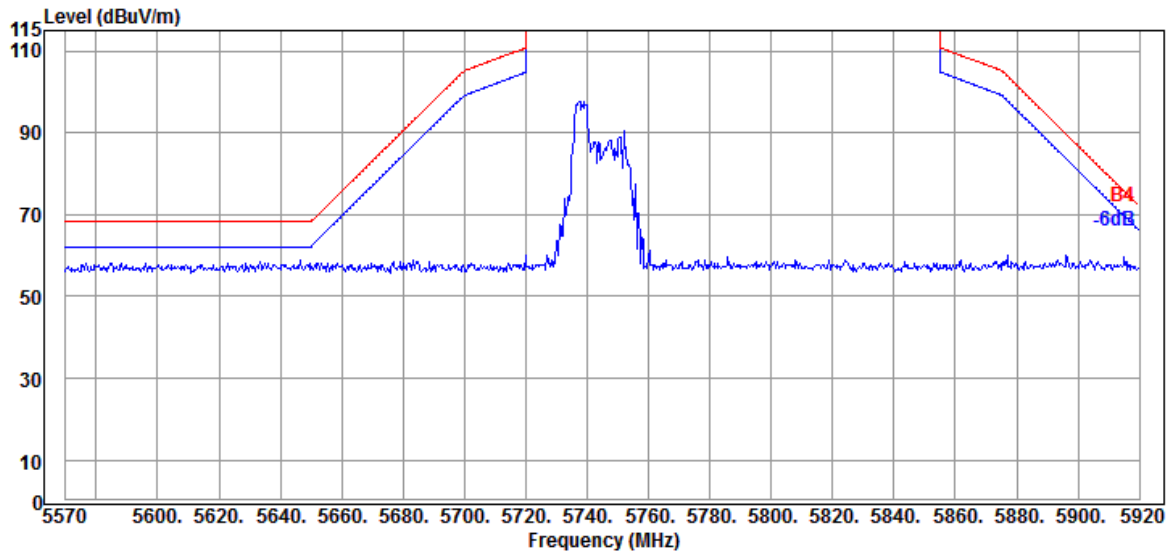

### Antenna at Vertical Polarization

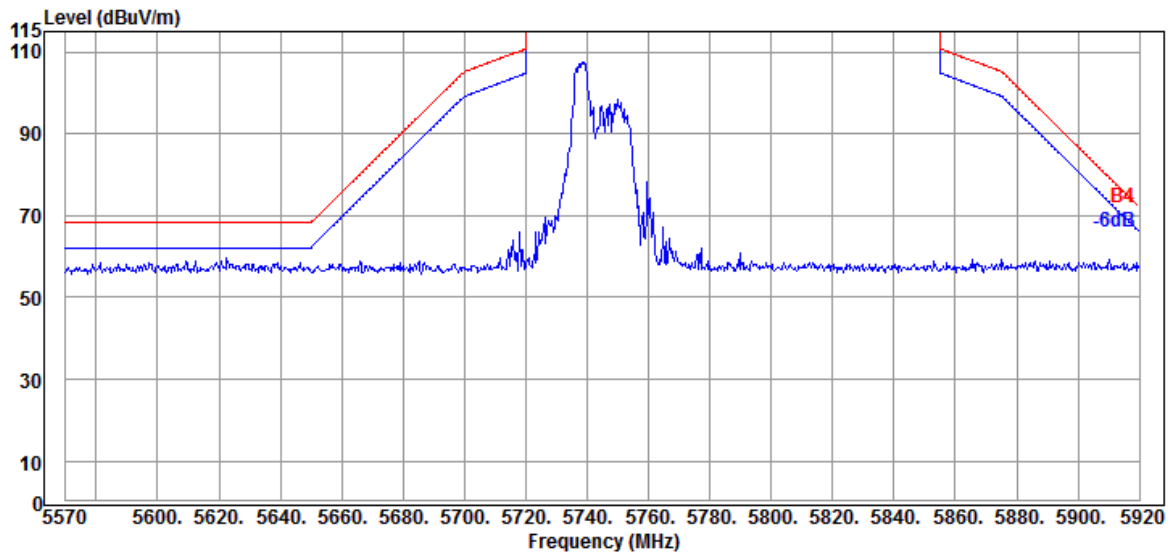


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | III        |
| RU Configuration | 106/53        | Frequency  | TX 5745MHz |

#### Antenna at Horizontal Polarization

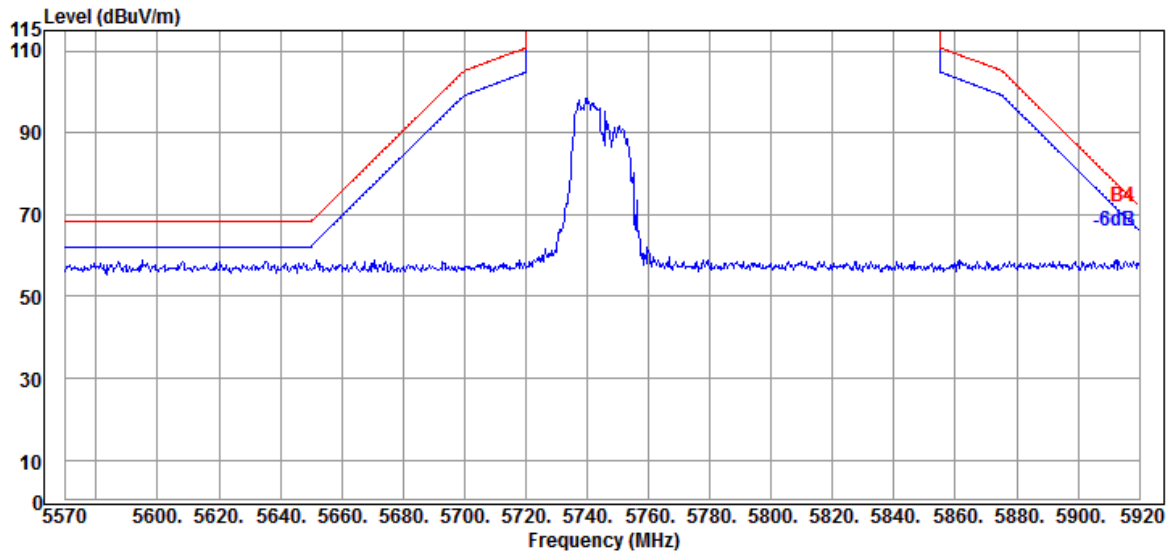

#### Antenna at Vertical Polarization

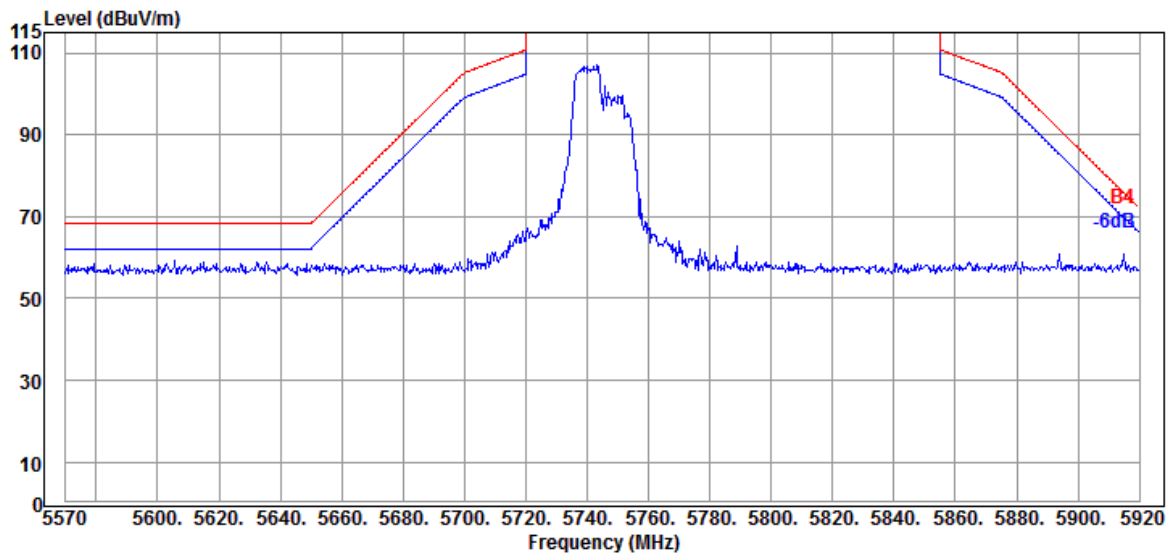


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | III        |
| RU Configuration | 26/8          | Frequency  | TX 5825MHz |

#### Antenna at Horizontal Polarization

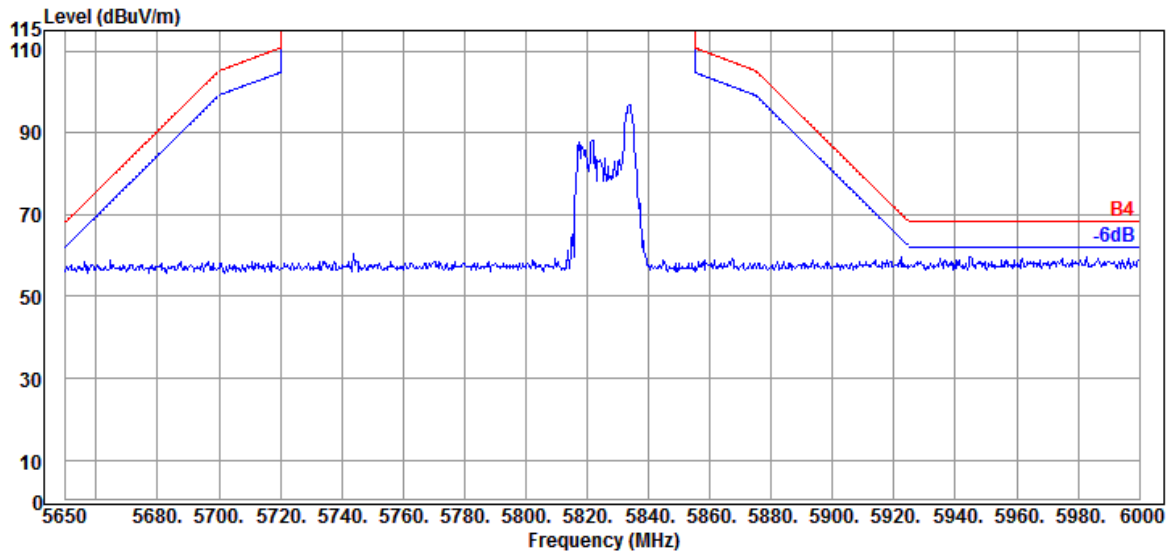

#### Antenna at Vertical Polarization

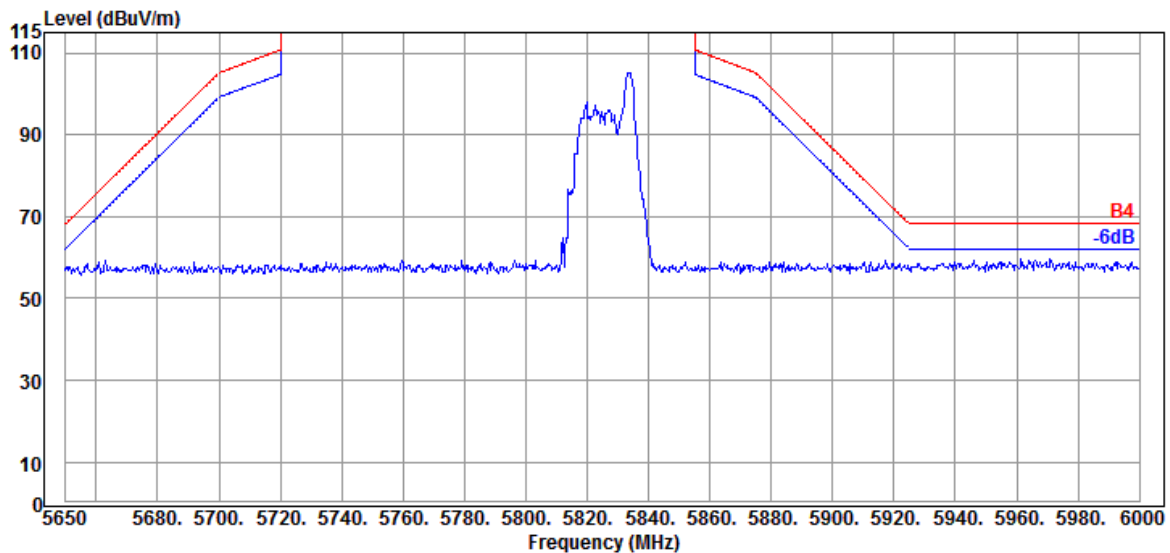


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | III        |
| RU Configuration | 52/40         | Frequency  | TX 5825MHz |

#### Antenna at Horizontal Polarization

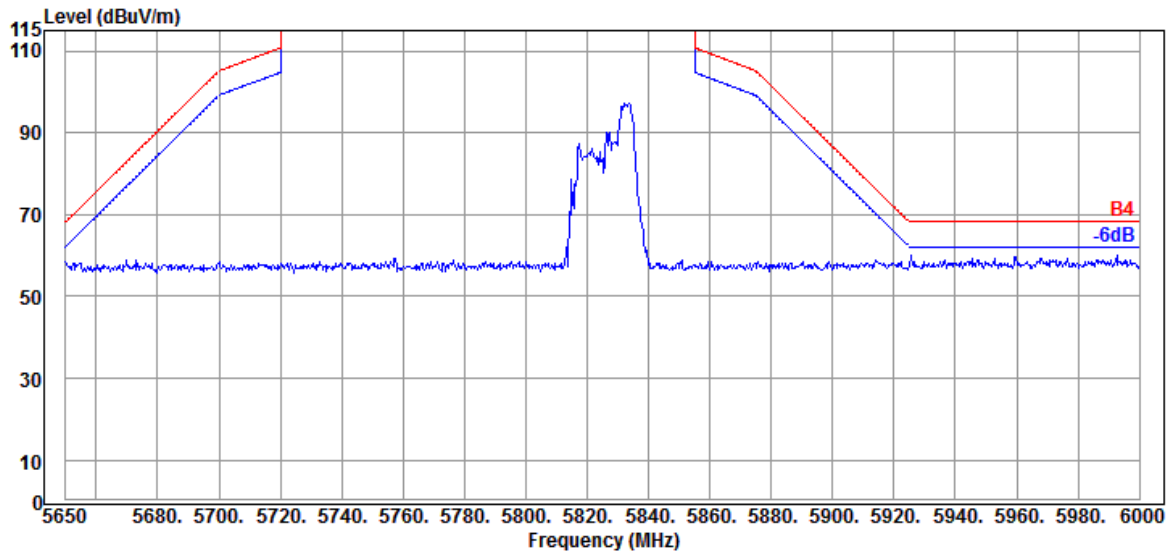


#### Antenna at Vertical Polarization

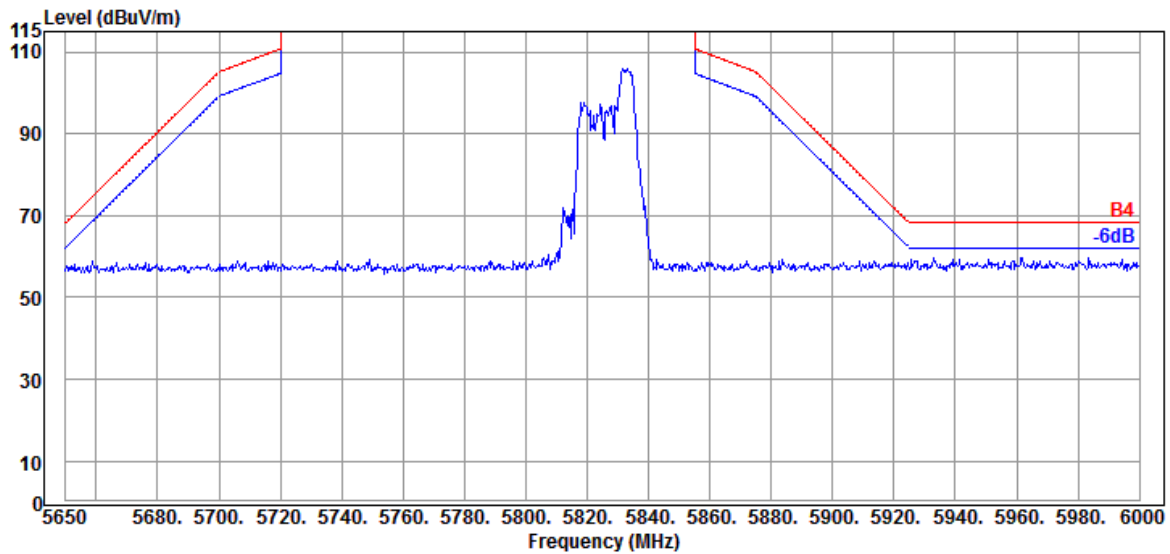


|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE20 | U-NII Band | III        |
| RU Configuration | 106/54        | Frequency  | TX 5825MHz |


#### Antenna at Horizontal Polarization

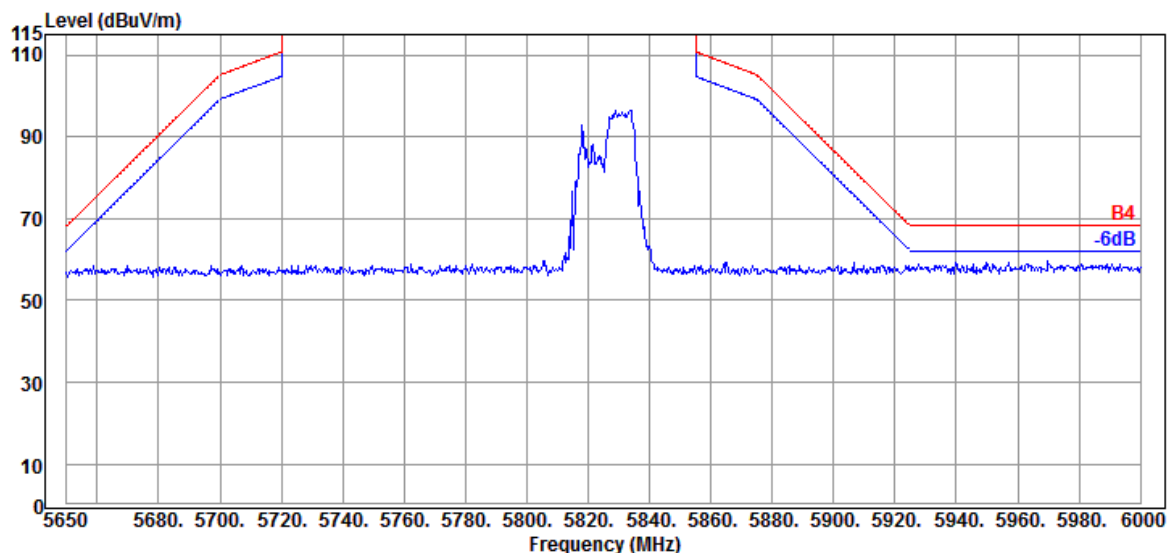

#### Antenna at Vertical Polarization

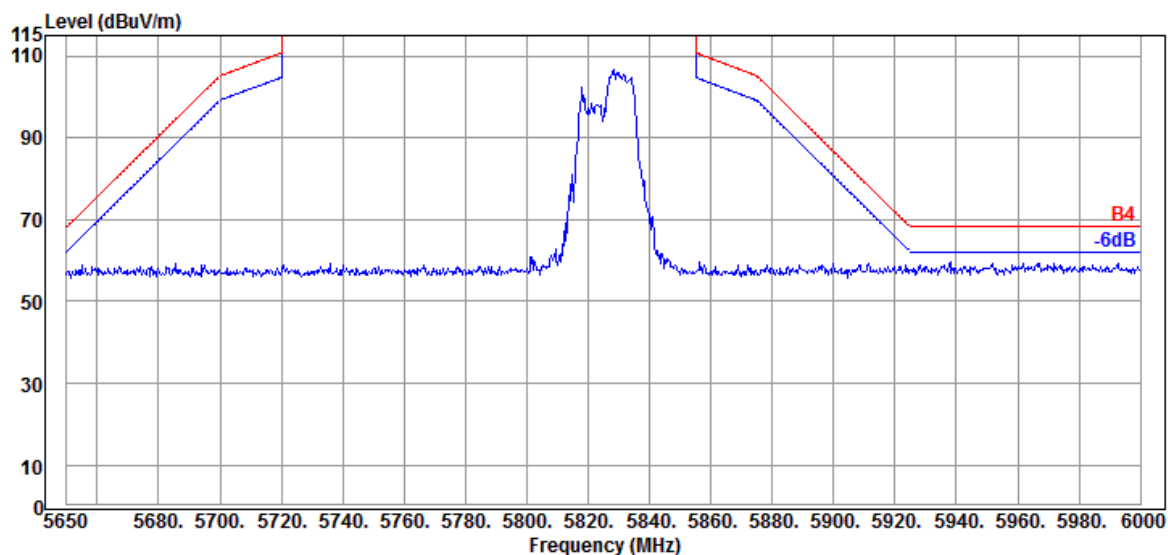


|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | I          |
| RU Configuration | 242/61        | Frequency  | TX 5190MHz |

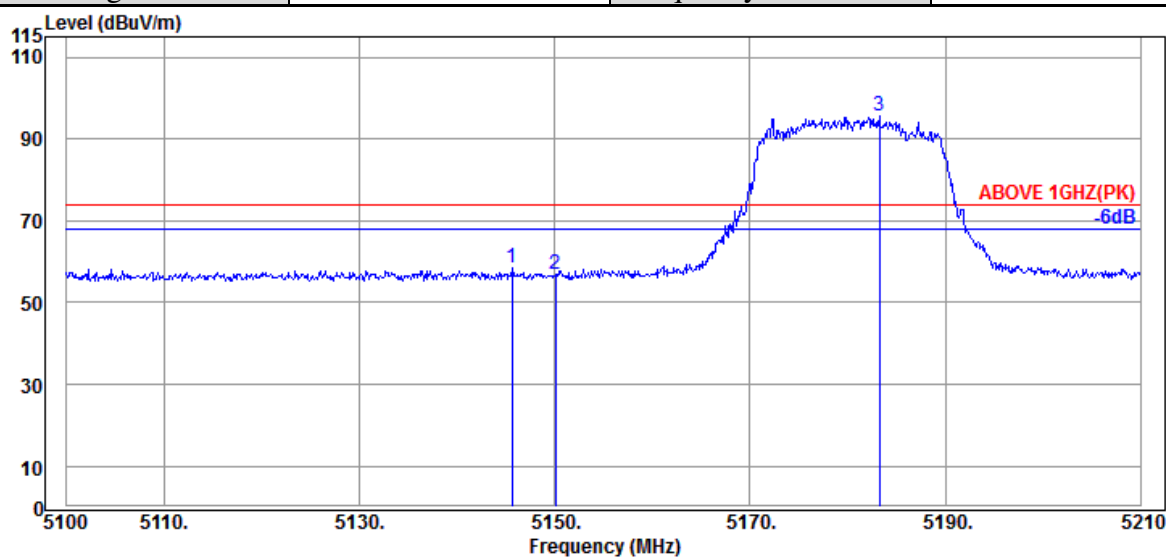

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.650                 | 34.20                 | 10.70           | 34.35            | 47.80             | 58.35                   | 74.00           | 15.65       | Peak     |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 46.38             | 56.93                   | 74.00           | 17.07       | Peak     |
| @ 5183.270               | 34.20                 | 10.72           | 34.34            | 84.90             | 95.48                   | ---             | ---         | Peak     |

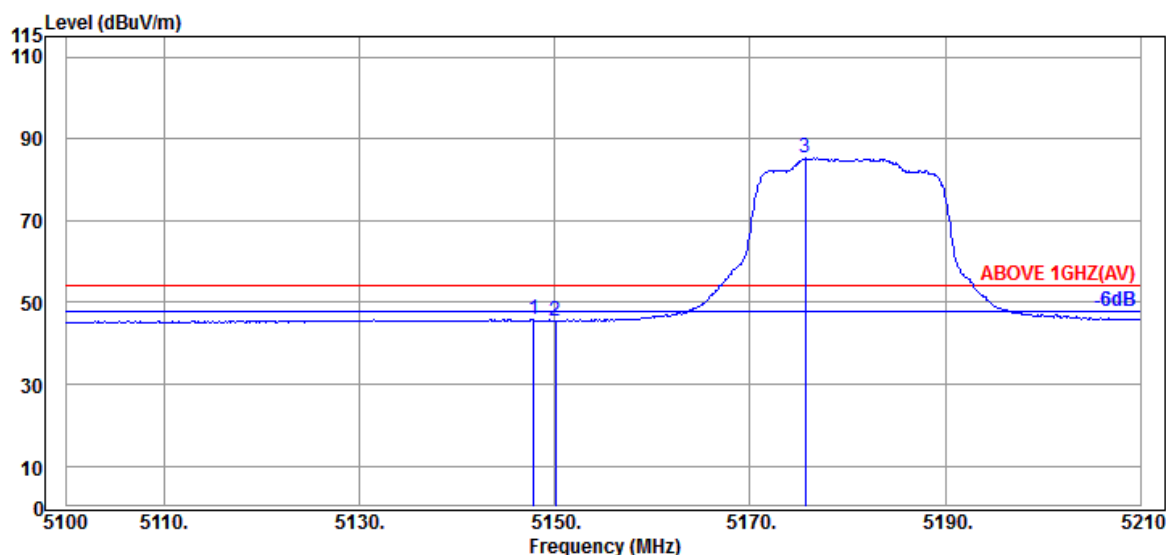

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.850                 | 34.20                 | 10.70           | 34.35            | 35.27             | 45.82                   | 54.00           | 8.18        | Average  |
| 5150.050                 | 34.20                 | 10.70           | 34.35            | 35.06             | 45.61                   | 54.00           | 8.39        | Average  |
| @ 5175.680               | 34.20                 | 10.72           | 34.34            | 74.69             | 85.27                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | I          |
| RU Configuration | 242/61        | Frequency  | TX 5190MHz |

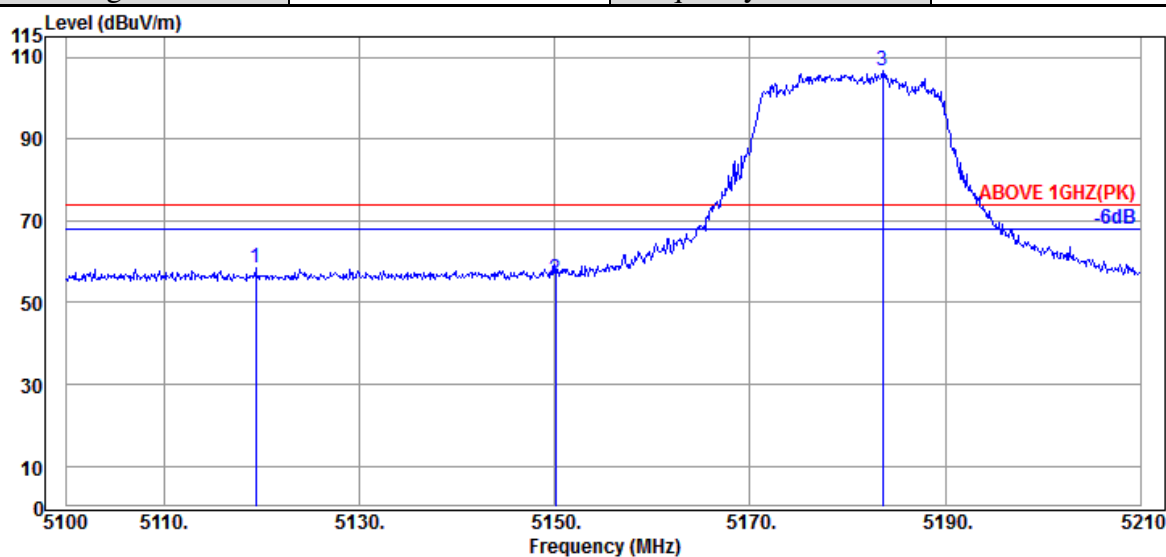

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5119.360                 | 34.13                 | 10.68           | 34.36                  | 48.01             | 58.46                   | 74.00           | 15.54       | Peak     |
| 5150.050                 | 34.20                 | 10.70           | 34.35                  | 45.37             | 55.92                   | 74.00           | 18.08       | Peak     |
| @ 5183.600               | 34.20                 | 10.72           | 34.34                  | 96.11             | 106.69                  | ---             | ---         | Peak     |

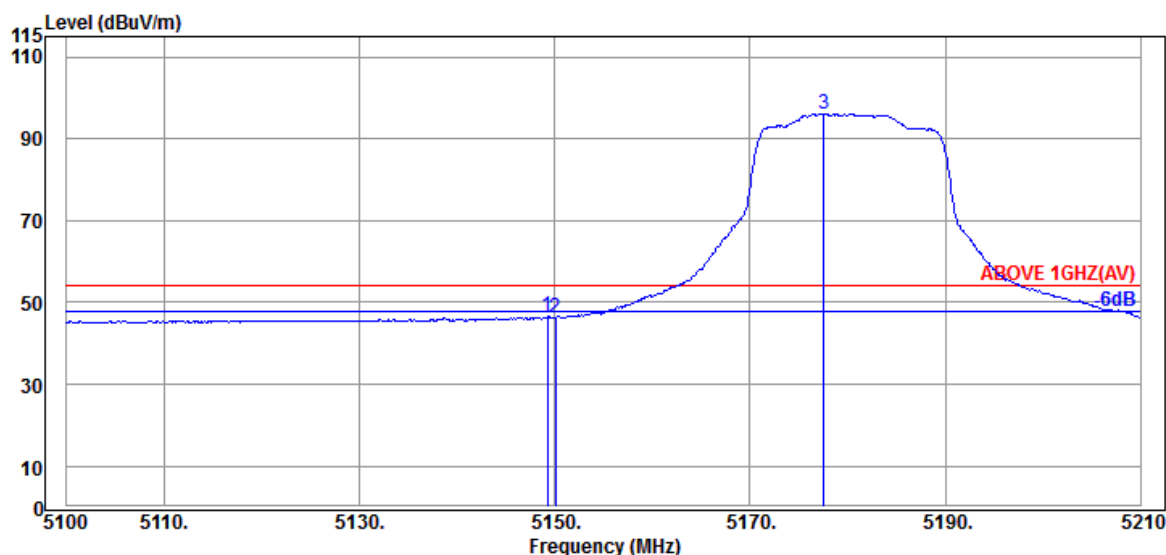

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.280                 | 34.20                 | 10.70           | 34.35                  | 35.92             | 46.47                   | 54.00           | 7.53        | Average  |
| 5150.050                 | 34.20                 | 10.70           | 34.35                  | 35.75             | 46.30                   | 54.00           | 7.70        | Average  |
| @ 5177.550               | 34.20                 | 10.72           | 34.34                  | 85.58             | 96.16                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2A         |
| RU Configuration | 242/62        | Frequency  | TX 5310MHz |

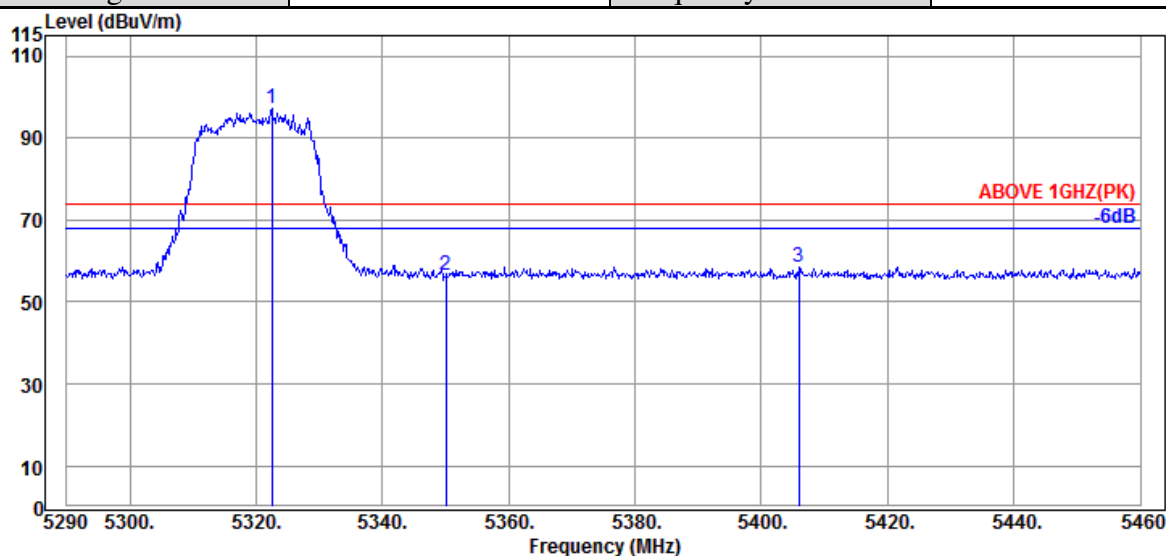

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5322.470               | 34.53                 | 10.83           | 34.28            | 86.18             | 97.26                   | ---             | ---         | Peak     |
| 5350.010                 | 34.60                 | 10.83           | 34.27            | 45.26             | 56.42                   | 74.00           | 17.58       | Peak     |
| 5405.940                 | 34.65                 | 10.87           | 34.26            | 47.09             | 58.35                   | 74.00           | 15.65       | Peak     |

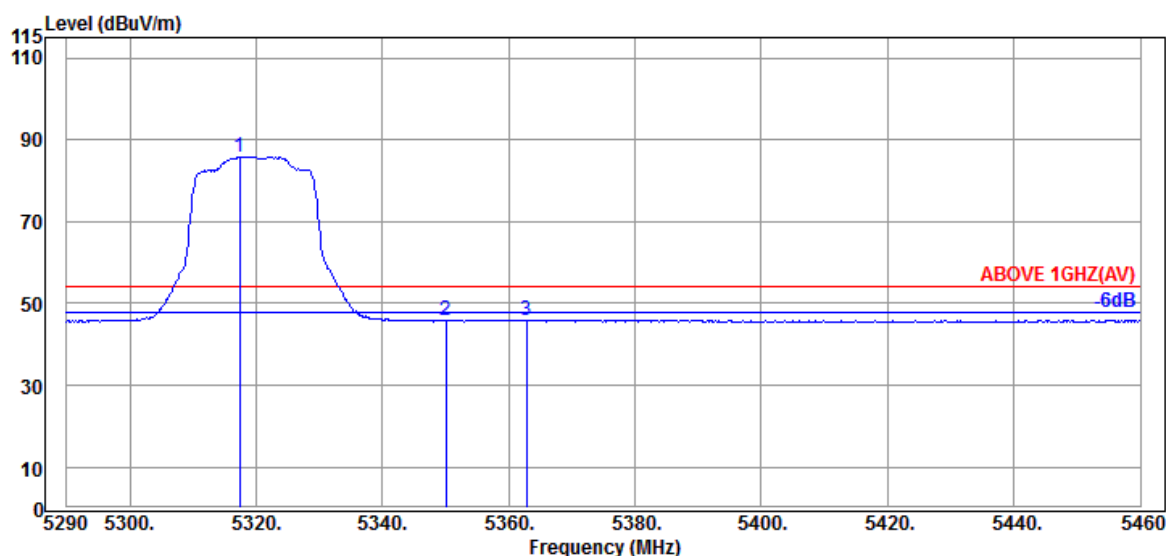

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5317.370               | 34.53                 | 10.81           | 34.29            | 74.79             | 85.84                   | ---             | ---         | Average  |
| 5350.010                 | 34.60                 | 10.83           | 34.27            | 34.57             | 45.73                   | 54.00           | 8.27        | Average  |
| 5362.760                 | 34.63                 | 10.85           | 34.27            | 34.82             | 46.03                   | 54.00           | 7.97        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2A         |
| RU Configuration | 242/62        | Frequency  | TX 5310MHz |

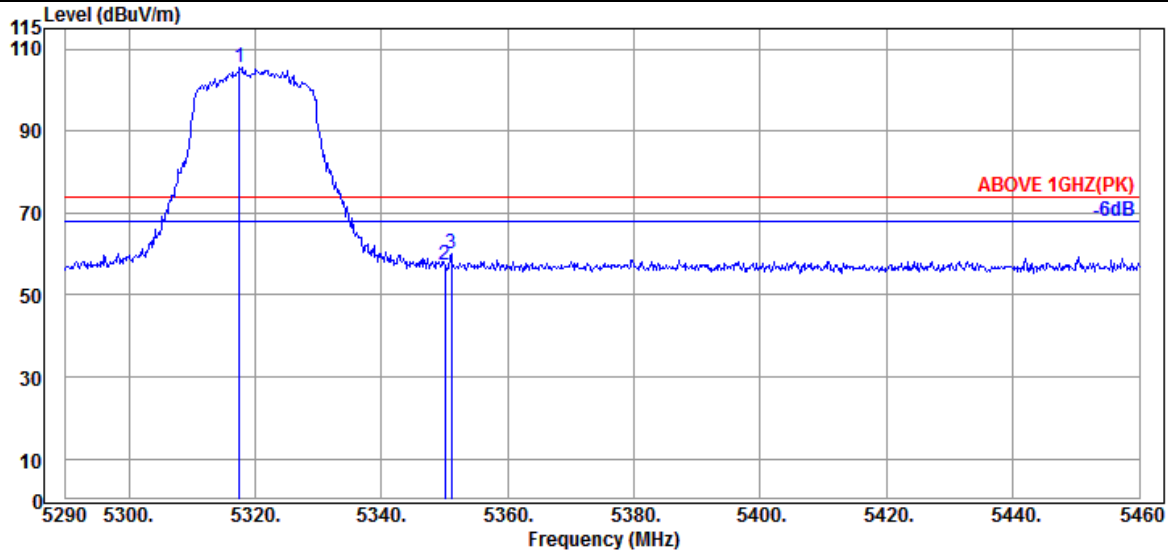

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5317.540               | 34.53                 | 10.81           | 34.29                  | 94.36             | 105.41                  | ---             | ---         | Peak     |
| 5350.010                 | 34.60                 | 10.83           | 34.27                  | 46.22             | 57.38                   | 74.00           | 16.62       | Peak     |
| 5351.030                 | 34.60                 | 10.83           | 34.27                  | 48.91             | 60.07                   | 74.00           | 13.93       | Peak     |

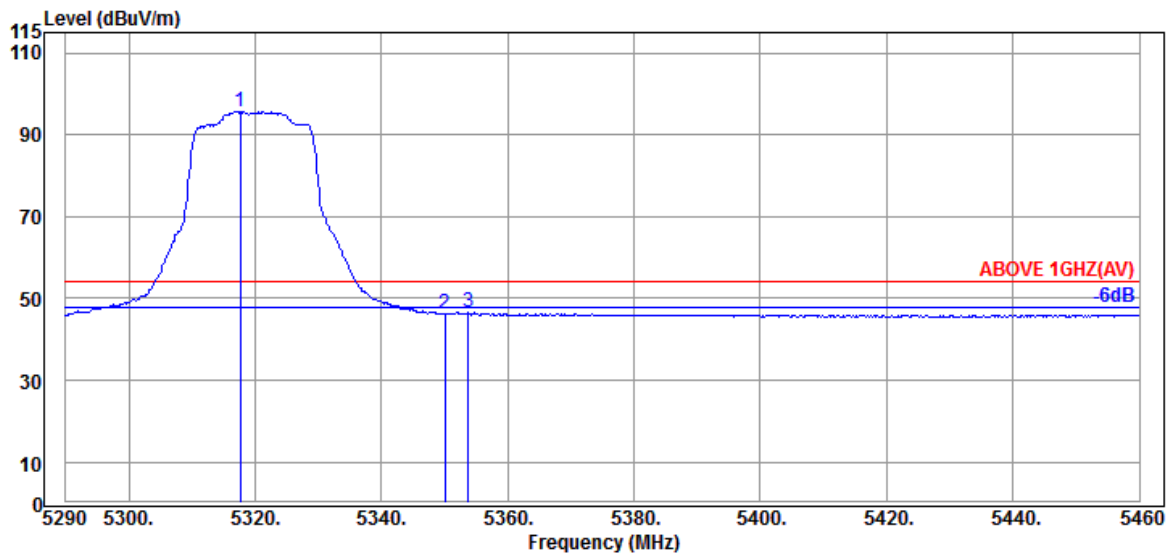

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5317.710               | 34.53                 | 10.81           | 34.29                  | 84.73             | 95.78                   | ---             | ---         | Average  |
| 5350.010                 | 34.60                 | 10.83           | 34.27                  | 35.02             | 46.18                   | 54.00           | 7.82        | Average  |
| 5353.750                 | 34.60                 | 10.83           | 34.27                  | 35.38             | 46.54                   | 54.00           | 7.46        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2C         |
| RU Configuration | 242/61        | Frequency  | TX 5510MHz |

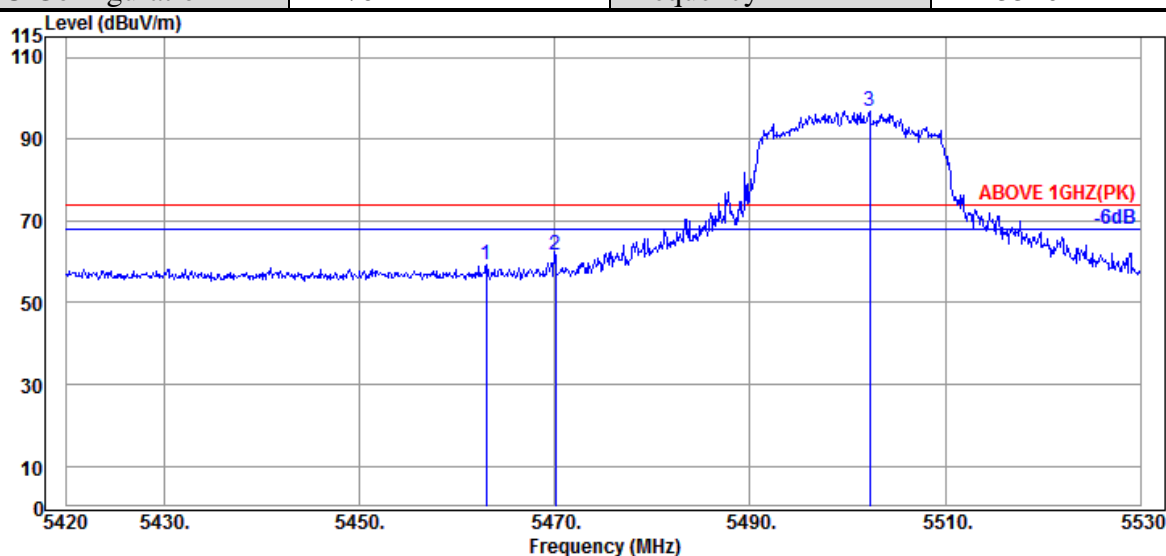

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5463.010                 | 34.50                 | 10.91           | 34.24                  | 47.94             | 59.11                   | 74.00           | 14.89       | Peak     |
| 5470.050                 | 34.47                 | 10.91           | 34.24                  | 50.70             | 61.84                   | 74.00           | 12.16       | Peak     |
| @ 5502.280               | 34.40                 | 10.93           | 34.24                  | 85.60             | 96.69                   | ---             | ---         | Peak     |

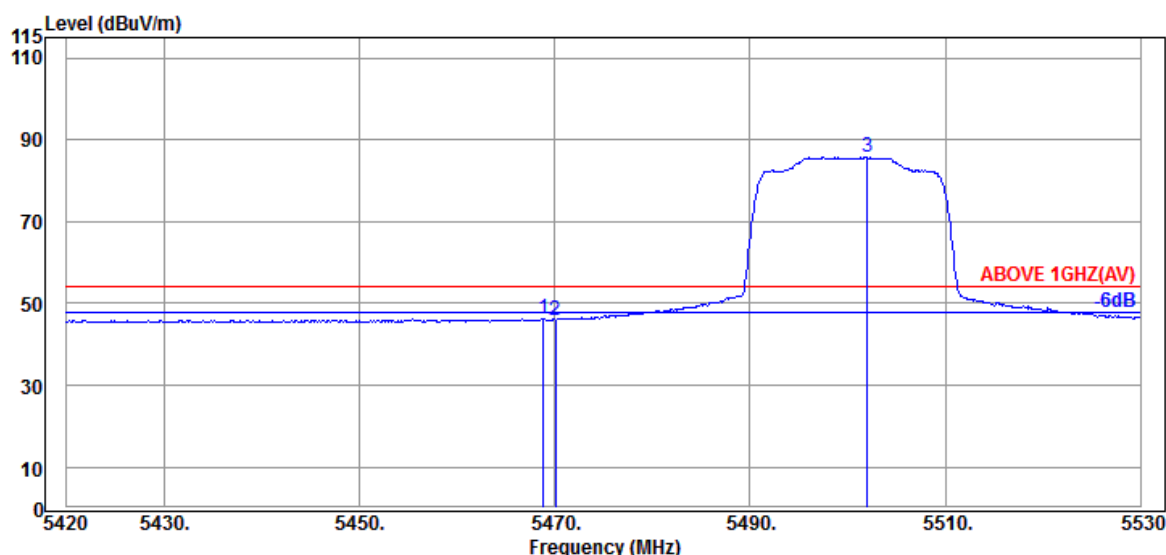

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.840                 | 34.47                 | 10.91           | 34.24                  | 35.10             | 46.24                   | 54.00           | 7.76        | Average  |
| 5470.050                 | 34.47                 | 10.91           | 34.24                  | 34.89             | 46.03                   | 54.00           | 7.97        | Average  |
| @ 5502.060               | 34.40                 | 10.93           | 34.24                  | 74.57             | 85.66                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2C         |
| RU Configuration | 242/61        | Frequency  | TX 5510MHz |

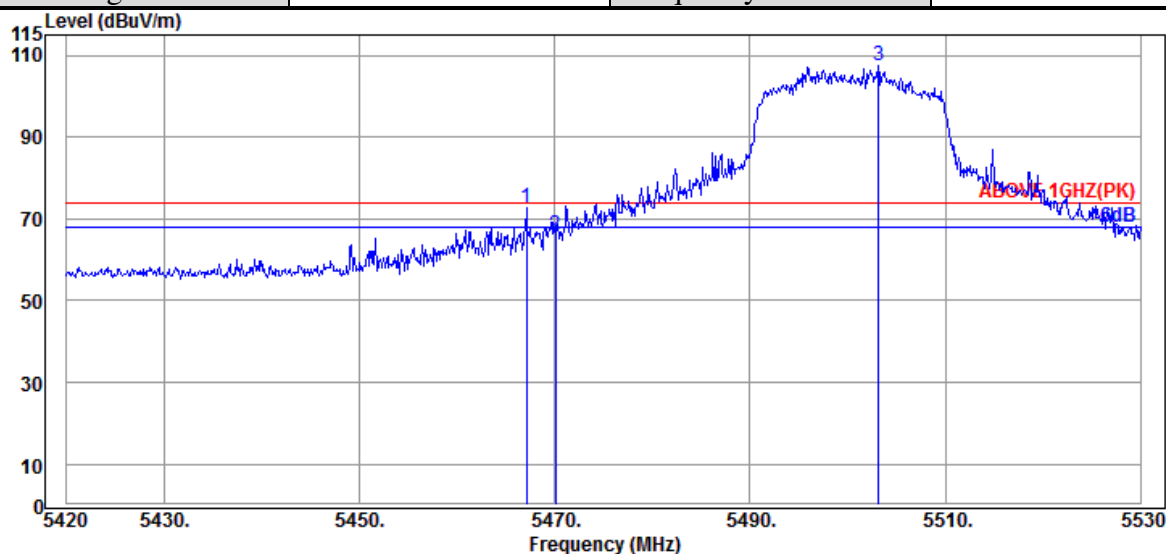

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.080                 | 34.47                 | 10.91           | 34.24                  | 61.75             | 72.89                   | 74.00           | 1.11        | Peak     |
| 5470.050                 | 34.47                 | 10.91           | 34.24                  | 55.00             | 66.14                   | 74.00           | 7.86        | Peak     |
| @ 5503.160               | 34.40                 | 10.93           | 34.24                  | 96.42             | 107.51                  | ---             | ---         | Peak     |

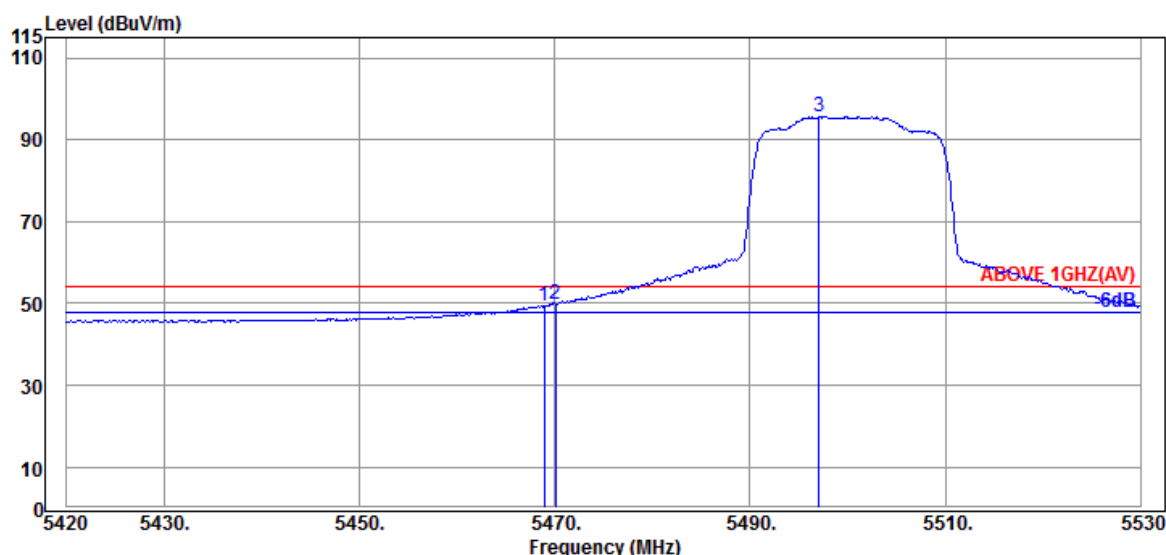


#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.950                 | 34.47                 | 10.91           | 34.24                  | 38.33             | 49.47                   | 54.00           | 4.53        | Average  |
| 5470.050                 | 34.47                 | 10.91           | 34.24                  | 38.80             | 49.94                   | 54.00           | 4.06        | Average  |
| @ 5497.110               | 34.40                 | 10.93           | 34.23                  | 84.55             | 95.65                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | 2C         |
| RU Configuration | 242/62        | Frequency  | TX 5670MHz |

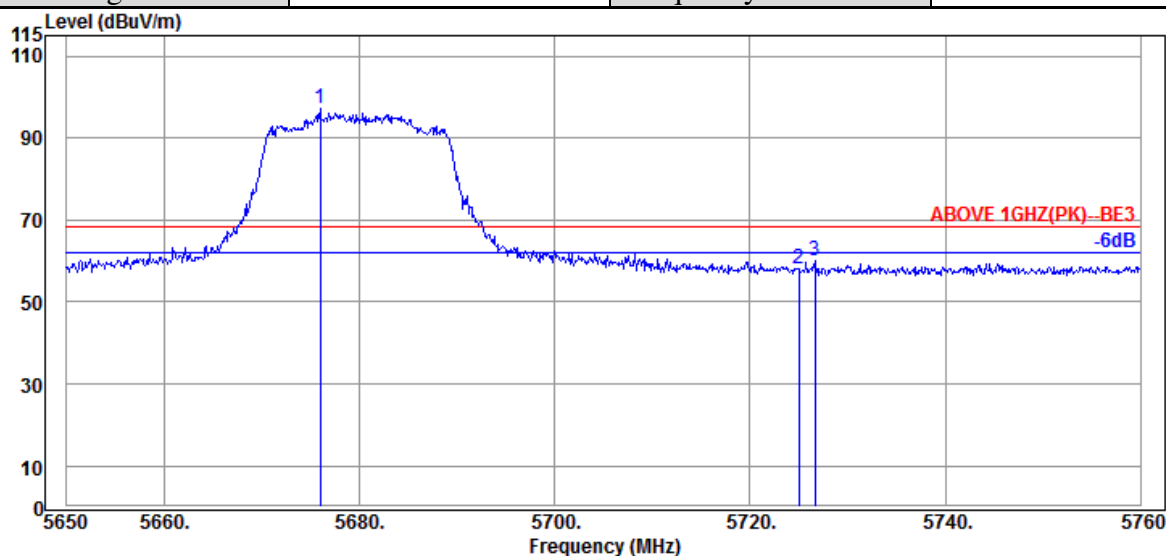

### Antenna at Horizontal Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 5675.960                       | 34.40                       | 11.03                 | 34.30                  | 86.04                   | 97.17                         | ---                | ---            | Peak     |
|   | 5725.020                       | 34.67                       | 11.05                 | 34.32                  | 46.65                   | 58.05                         | 68.20              | 10.15          | Peak     |
|   | 5726.670                       | 34.67                       | 11.05                 | 34.32                  | 48.78                   | 60.18                         | 68.20              | 8.02           | Peak     |

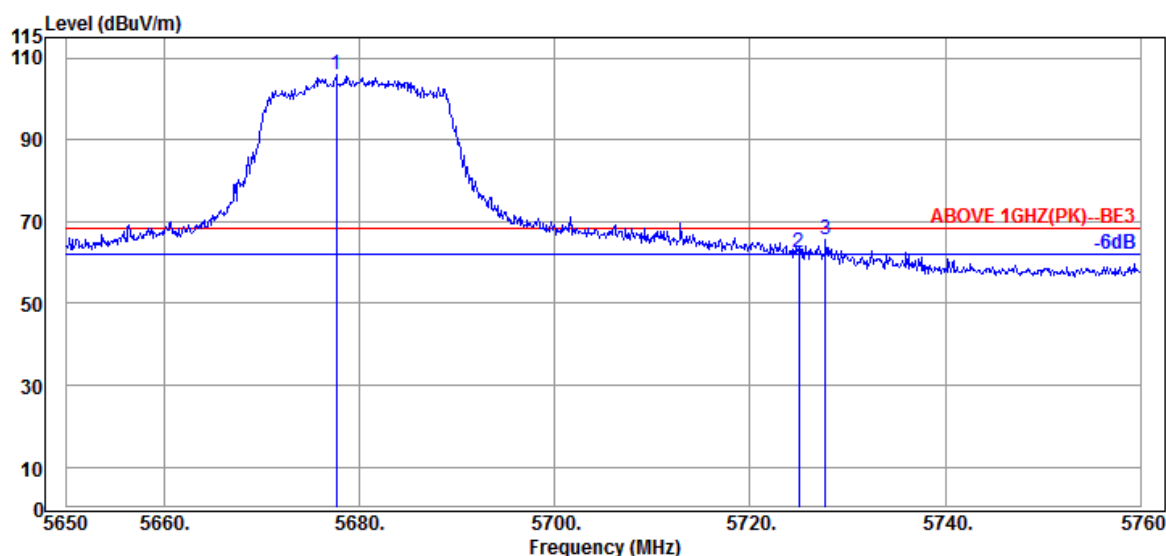

### Antenna at Vertical Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 5677.610                       | 34.40                       | 11.03                 | 34.30                  | 94.78                   | 105.91                        | ---                | ---            | Peak     |
|   | 5725.020                       | 34.67                       | 11.05                 | 34.32                  | 51.16                   | 62.56                         | 68.20              | 5.64           | Peak     |
|   | 5727.770                       | 34.67                       | 11.05                 | 34.32                  | 54.11                   | 65.51                         | 68.20              | 2.69           | Peak     |

---

Remark: The “@” means fundamental frequency, it is ignored in this section.


**File Number: C1M2106154**

**Report Number: EM-F210482**


*This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.*

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | III        |
| RU Configuration | 242/61        | Frequency  | TX 5755MHz |

#### Antenna at Horizontal Polarization

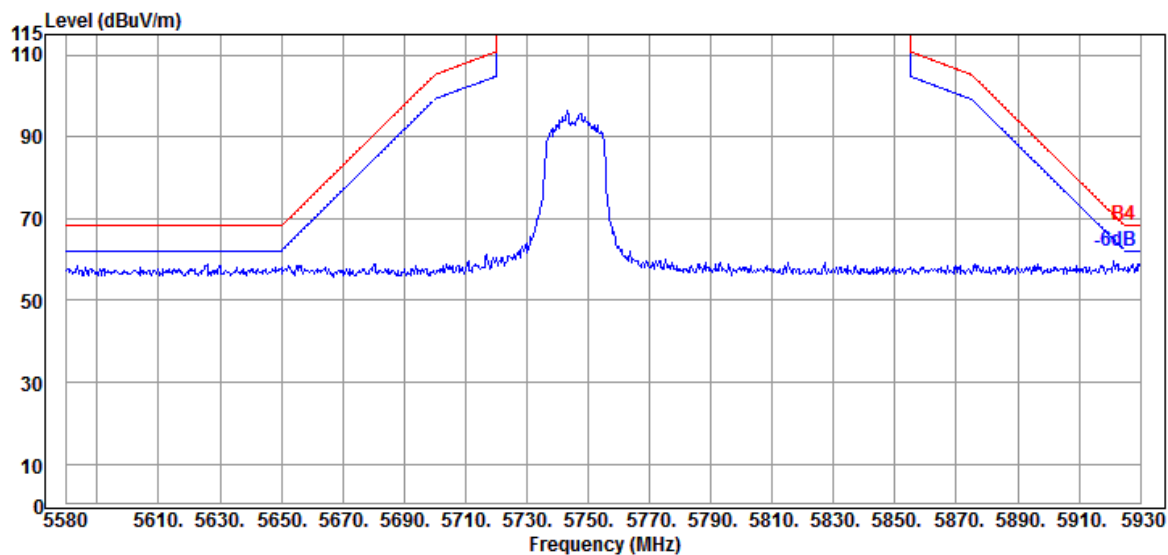


#### Antenna at Vertical Polarization

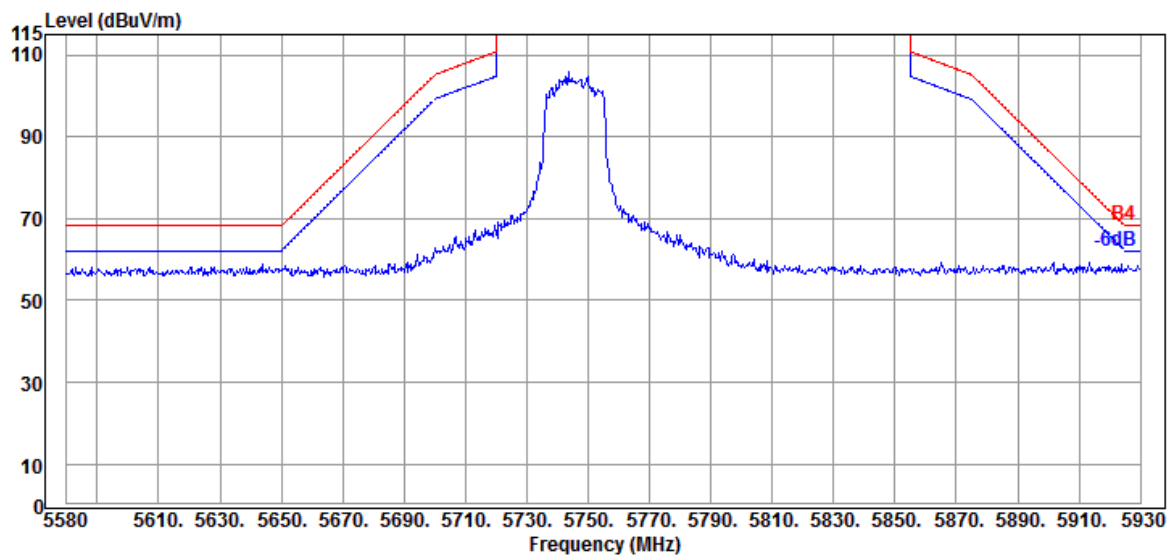


|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE40 | U-NII Band | III        |
| RU Configuration | 242/62        | Frequency  | TX 5795MHz |


#### Antenna at Horizontal Polarization

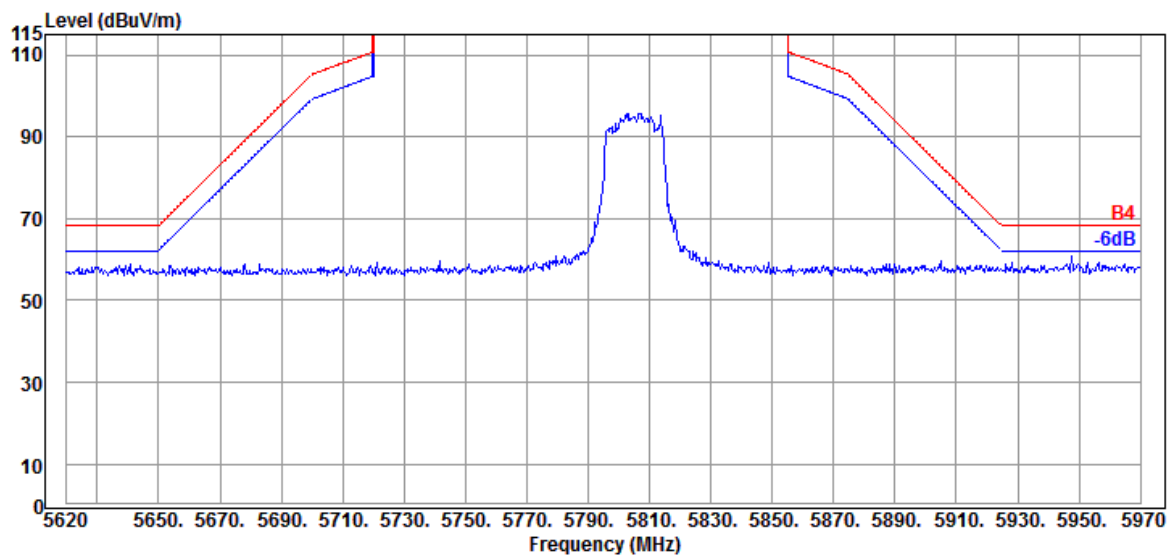

#### Antenna at Vertical Polarization

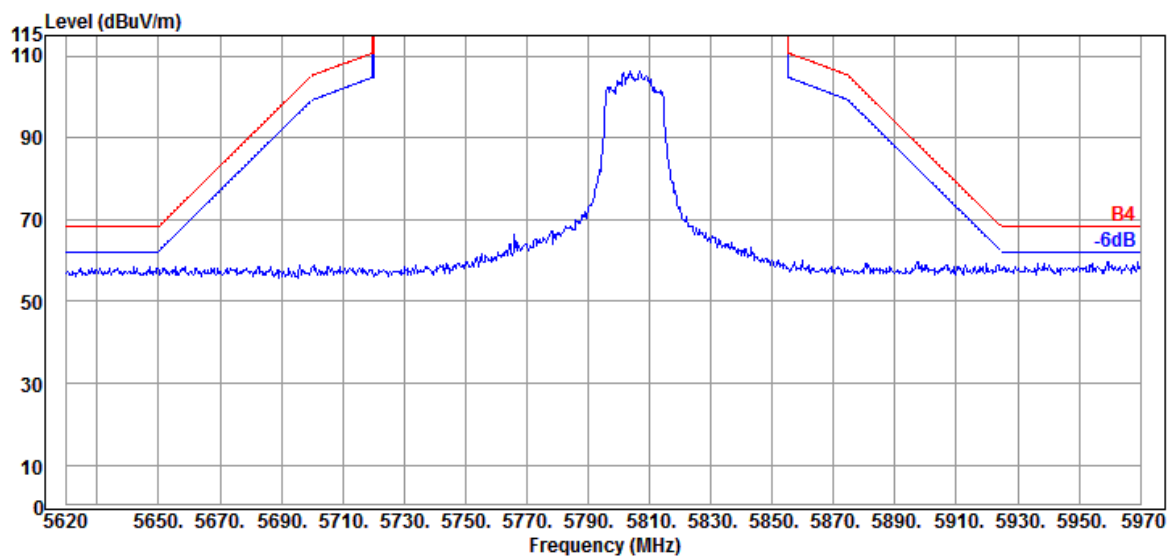


|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | I          |
| RU Configuration | 484/65        | Frequency  | TX 5210MHz |

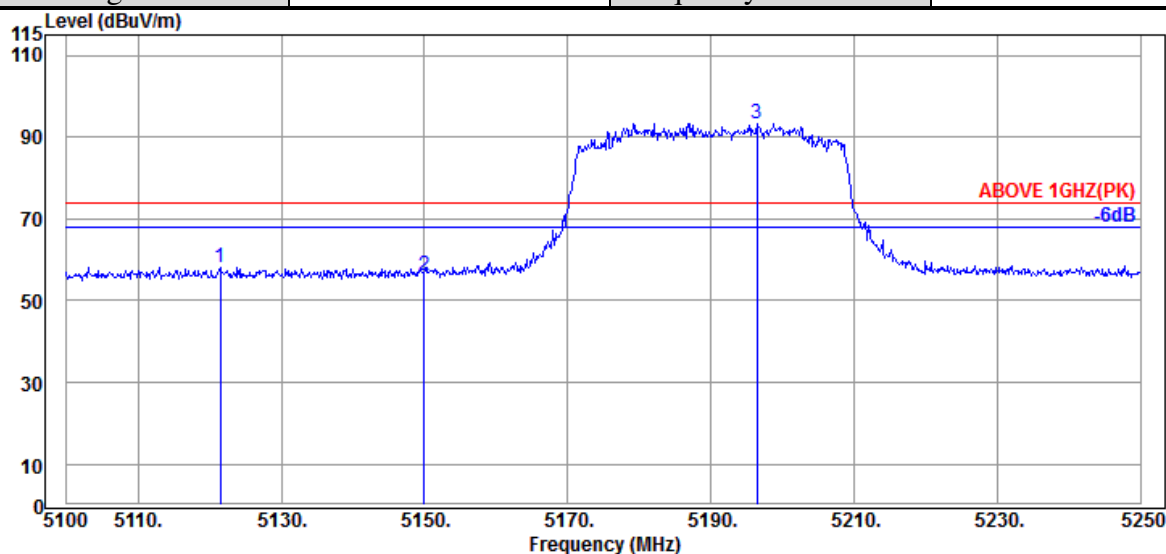

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5121.450                 | 34.13                 | 10.70           | 34.36                  | 47.60             | 58.07                   | 74.00           | 15.93       | Peak     |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 45.70             | 56.25                   | 74.00           | 17.75       | Peak     |
| @ 5196.450               | 34.20                 | 10.74           | 34.33                  | 82.69             | 93.30                   | ---             | ---         | Peak     |

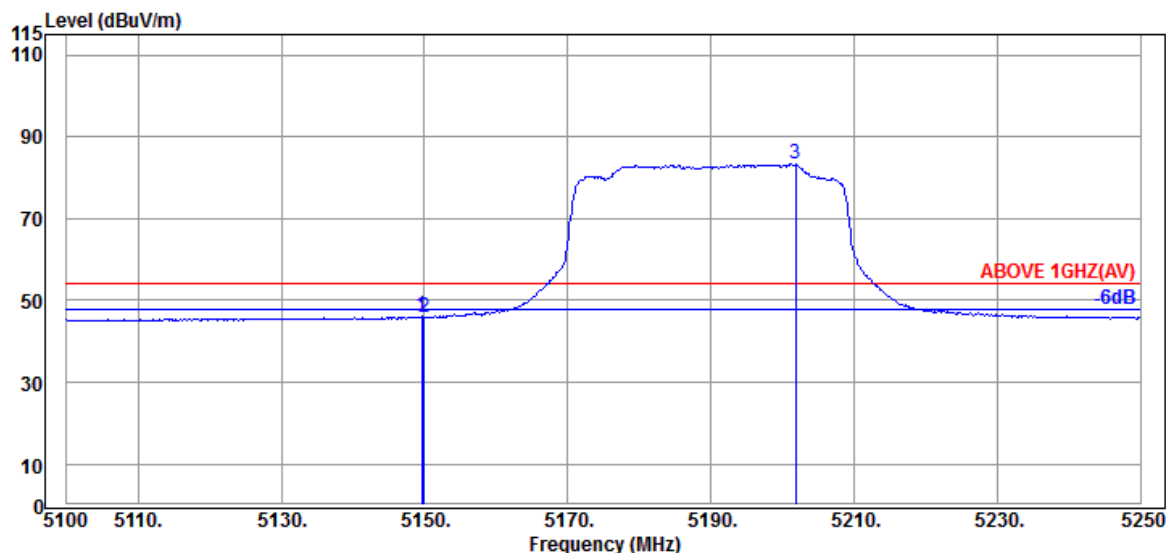

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.650                 | 34.20                 | 10.70           | 34.35                  | 35.51             | 46.06                   | 54.00           | 7.94        | Average  |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 35.40             | 45.95                   | 54.00           | 8.05        | Average  |
| @ 5201.850               | 34.25                 | 10.74           | 34.33                  | 72.62             | 83.28                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | I          |
| RU Configuration | 484/65        | Frequency  | TX 5210MHz |

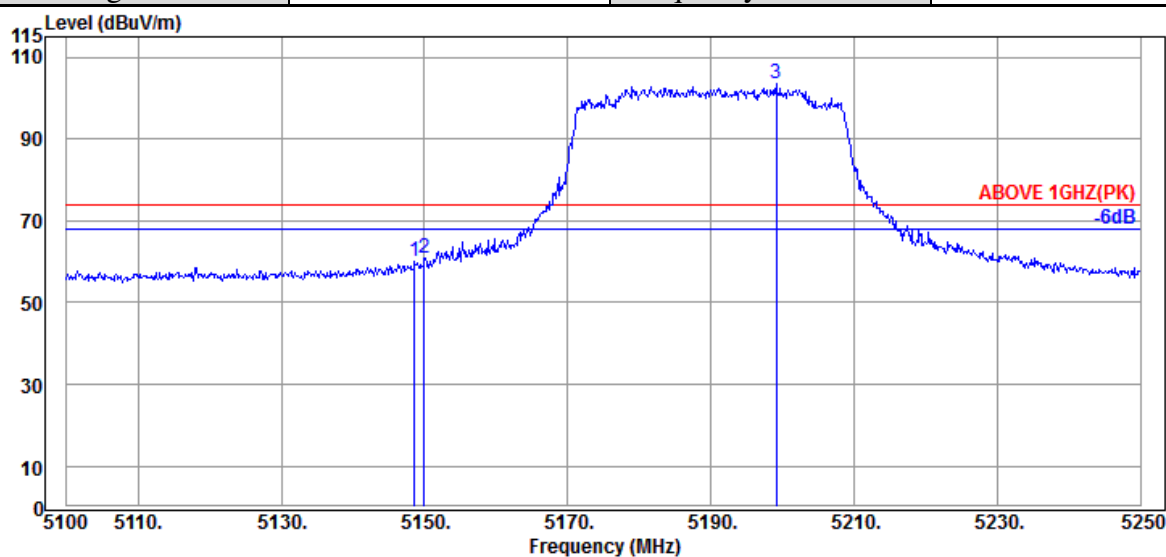

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.600                 | 34.20                 | 10.70           | 34.35                  | 49.55             | 60.10                   | 74.00           | 13.90       | Peak     |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 50.38             | 60.93                   | 74.00           | 13.07       | Peak     |
| @ 5199.150               | 34.20                 | 10.74           | 34.33                  | 92.77             | 103.38                  | ---             | ---         | Peak     |

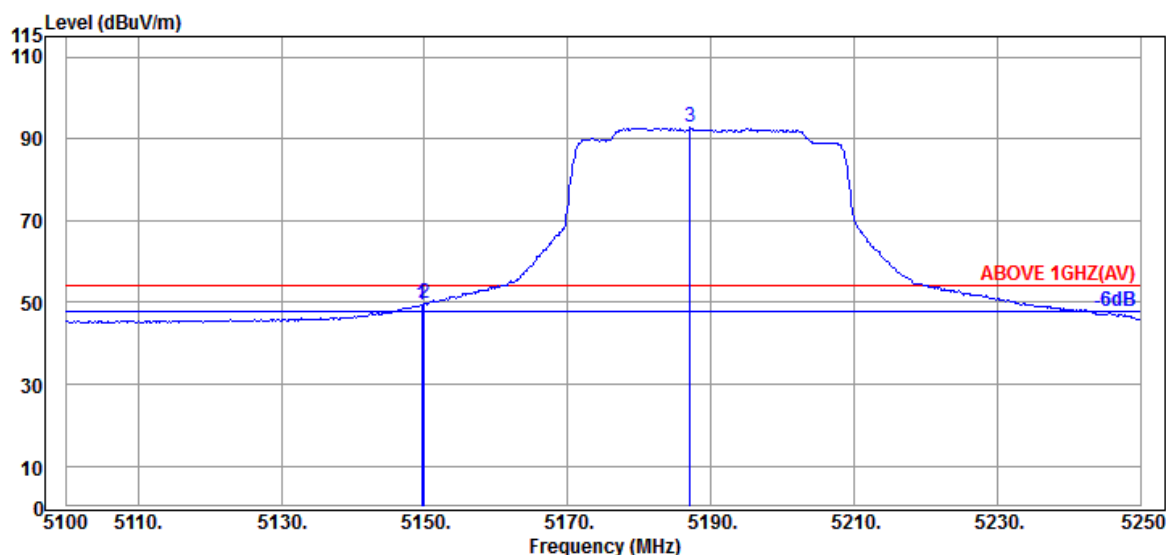

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.650                 | 34.20                 | 10.70           | 34.35                  | 38.98             | 49.53                   | 54.00           | 4.47        | Average  |
| 5149.950                 | 34.20                 | 10.70           | 34.35                  | 39.14             | 49.69                   | 54.00           | 4.31        | Average  |
| @ 5187.150               | 34.20                 | 10.74           | 34.34                  | 82.18             | 92.78                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2A         |
| RU Configuration | 484/66        | Frequency  | TX 5290MHz |

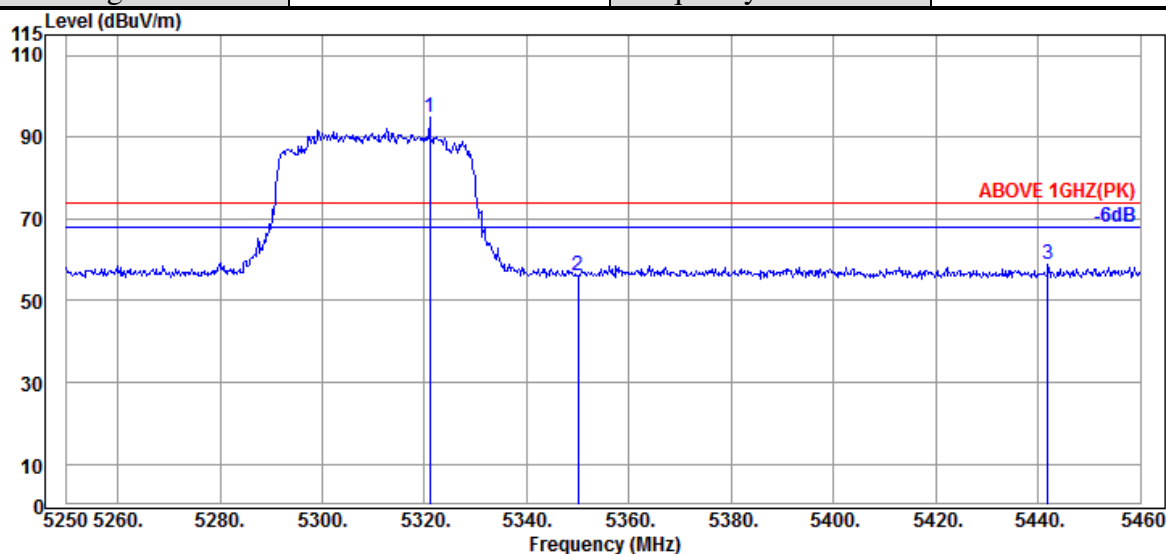

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5320.980               | 34.53                 | 10.81           | 34.29                  | 83.61             | 94.66                   | ---             | ---         | Peak     |
| 5349.960                 | 34.60                 | 10.83           | 34.27                  | 45.08             | 56.24                   | 74.00           | 17.76       | Peak     |
| 5441.940                 | 34.55                 | 10.89           | 34.25                  | 47.83             | 59.02                   | 74.00           | 14.98       | Peak     |

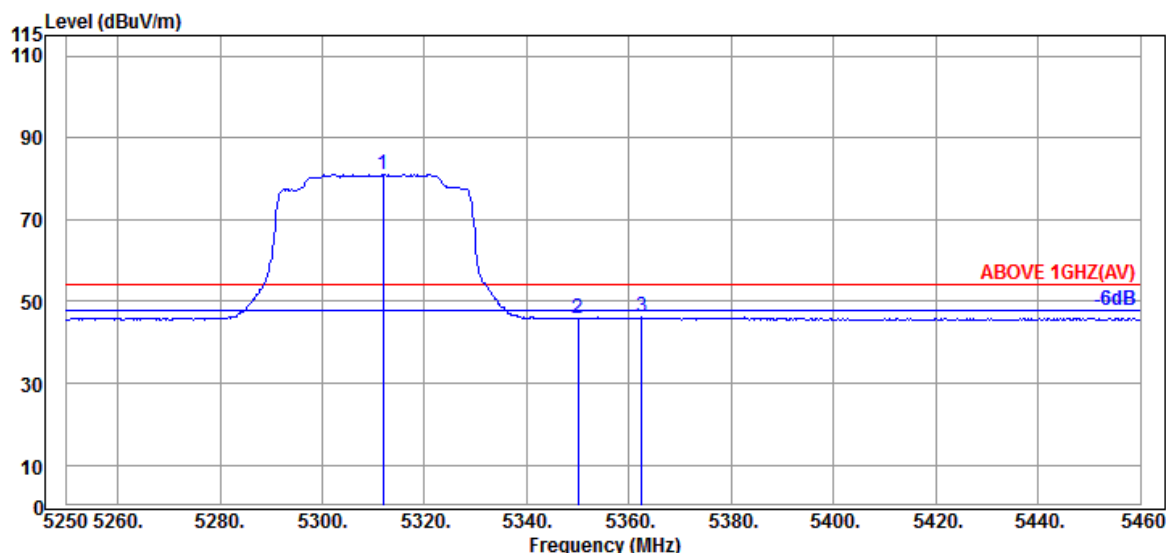

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5311.950               | 34.53                 | 10.81           | 34.29                  | 70.03             | 81.08                   | ---             | ---         | Average  |
| 5349.960                 | 34.60                 | 10.83           | 34.27                  | 34.74             | 45.90                   | 54.00           | 8.10        | Average  |
| 5362.560                 | 34.63                 | 10.85           | 34.27                  | 34.89             | 46.10                   | 54.00           | 7.90        | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2A         |
| RU Configuration | 484/66        | Frequency  | TX 5290MHz |

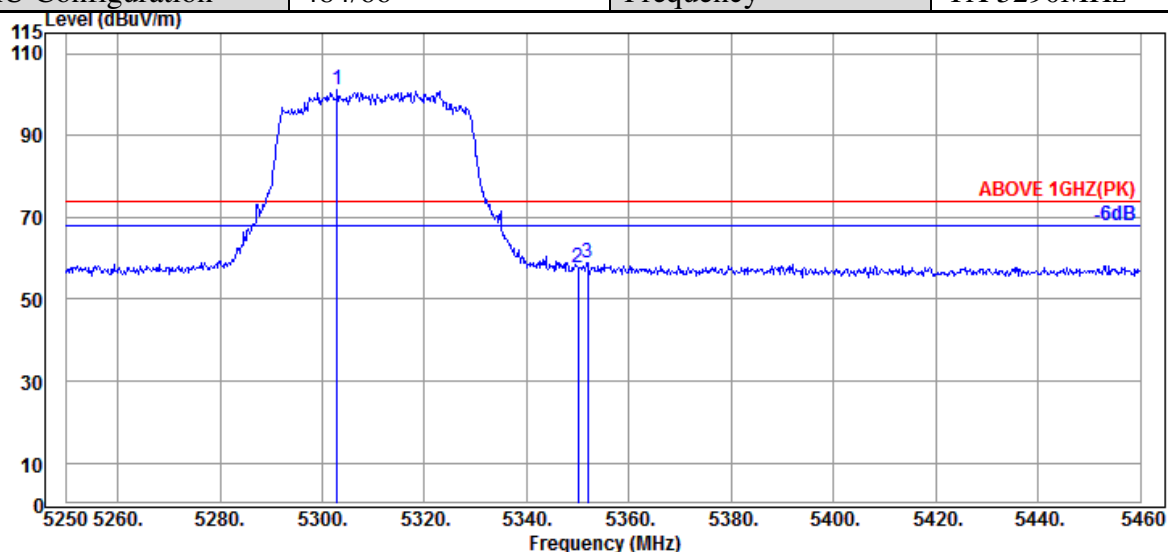

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.920               | 34.50                 | 10.81           | 34.29                  | 89.97             | 100.99                  | ---             | ---         | Peak     |
| 5349.960                 | 34.60                 | 10.83           | 34.27                  | 46.38             | 57.54                   | 74.00           | 16.46       | Peak     |
| 5351.850                 | 34.60                 | 10.83           | 34.27                  | 47.69             | 58.85                   | 74.00           | 15.15       | Peak     |

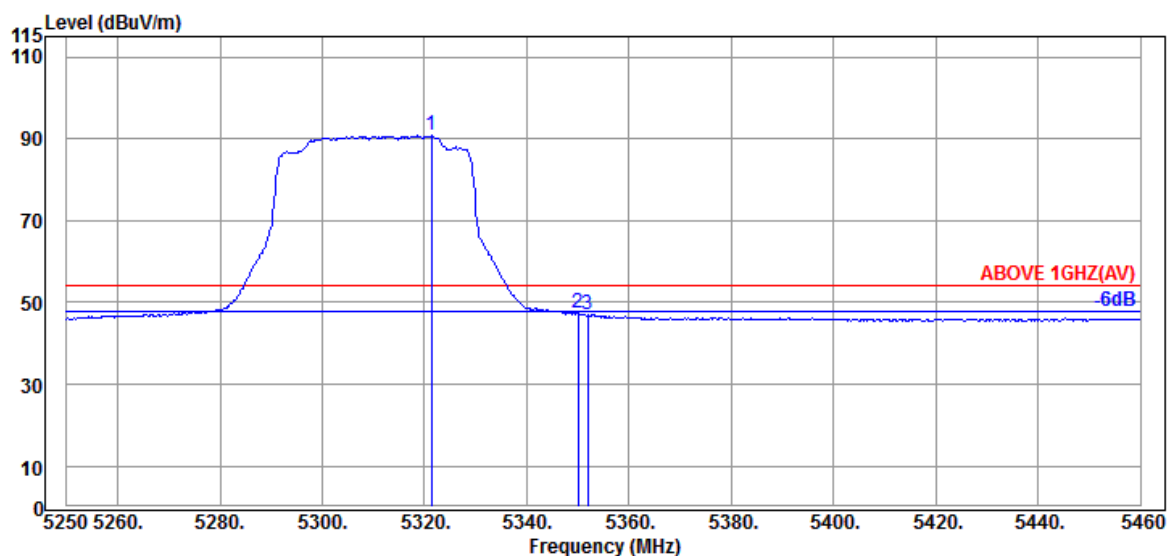

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5321.400               | 34.53                 | 10.81           | 34.29                  | 79.73             | 90.78                   | ---             | ---         | Average  |
| 5349.960                 | 34.60                 | 10.83           | 34.27                  | 36.10             | 47.26                   | 54.00           | 6.74        | Average  |
| 5351.850                 | 34.60                 | 10.83           | 34.27                  | 35.92             | 47.08                   | 54.00           | 6.92        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2C         |
| RU Configuration | 484/65        | Frequency  | TX 5530MHz |

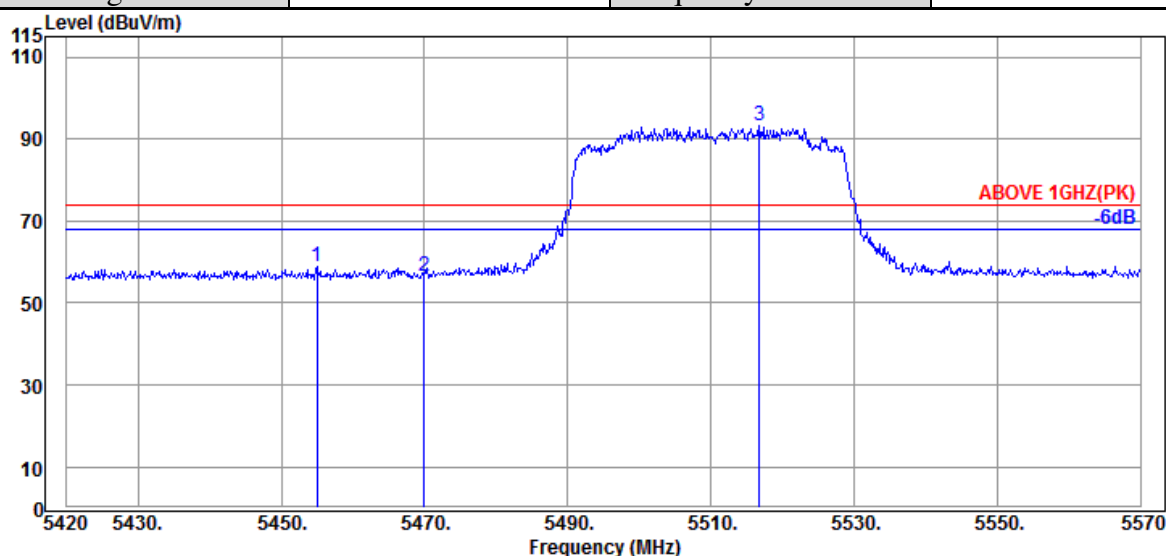

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5454.950                 | 34.50                 | 10.89           | 34.24                  | 47.87             | 59.02                   | 74.00           | 14.98       | Peak     |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 45.51             | 56.65                   | 74.00           | 17.35       | Peak     |
| @ 5516.750               | 34.37                 | 10.93           | 34.24                  | 82.04             | 93.10                   | ---             | ---         | Peak     |

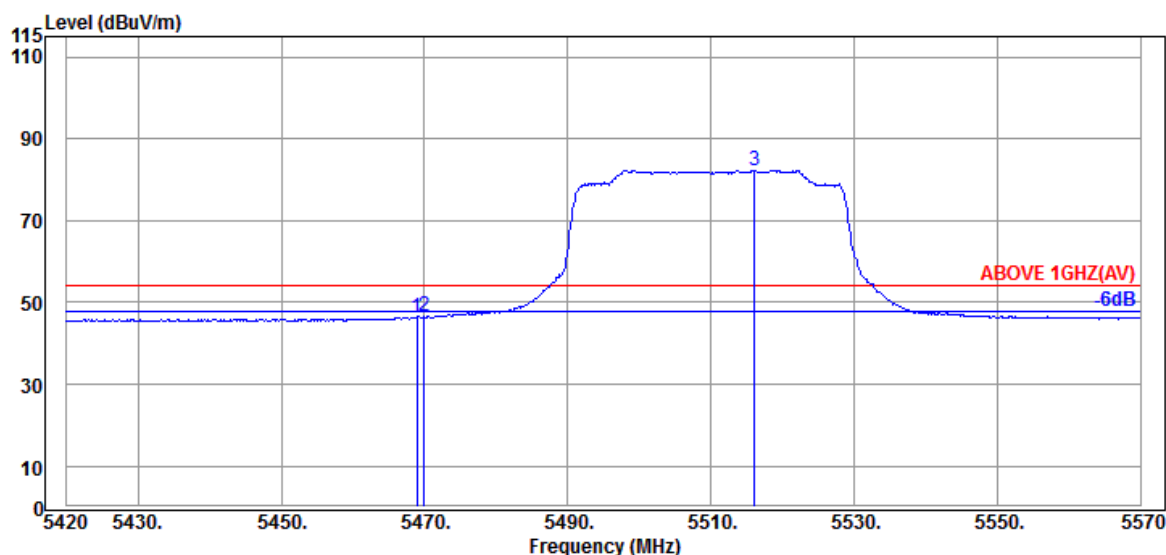

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.900                 | 34.47                 | 10.91           | 34.24                  | 35.20             | 46.34                   | 54.00           | 7.66        | Average  |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 35.31             | 46.45                   | 54.00           | 7.55        | Average  |
| @ 5516.150               | 34.37                 | 10.93           | 34.24                  | 71.33             | 82.39                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2C         |
| RU Configuration | 484/65        | Frequency  | TX 5530MHz |

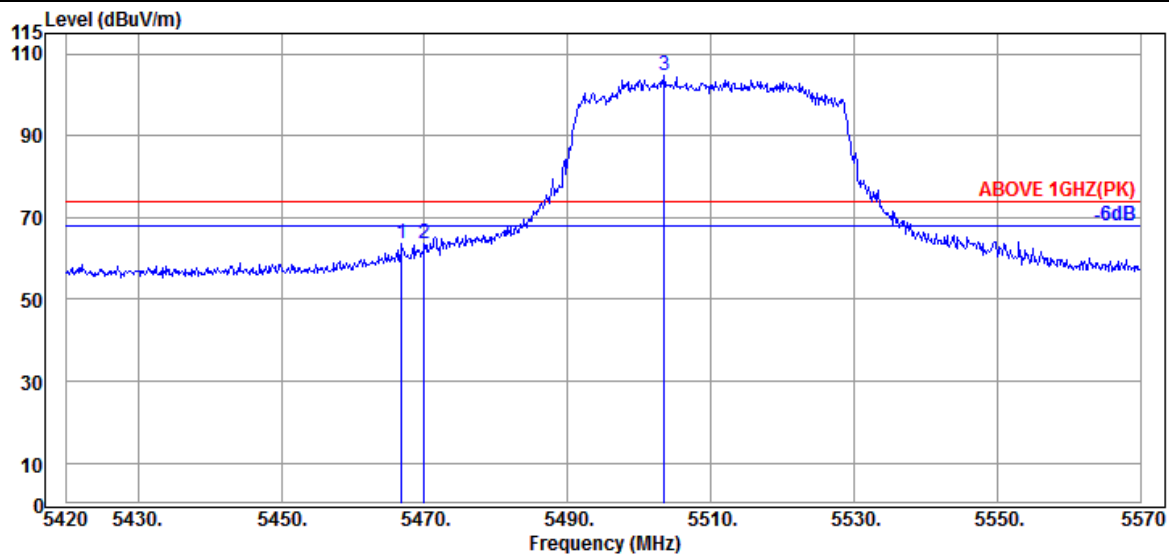

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.800                 | 34.47                 | 10.91           | 34.24                  | 52.38             | 63.52                   | 74.00           | 10.48       | Peak     |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 52.38             | 63.52                   | 74.00           | 10.48       | Peak     |
| @ 5503.550               | 34.40                 | 10.93           | 34.24                  | 93.52             | 104.61                  | ---             | ---         | Peak     |

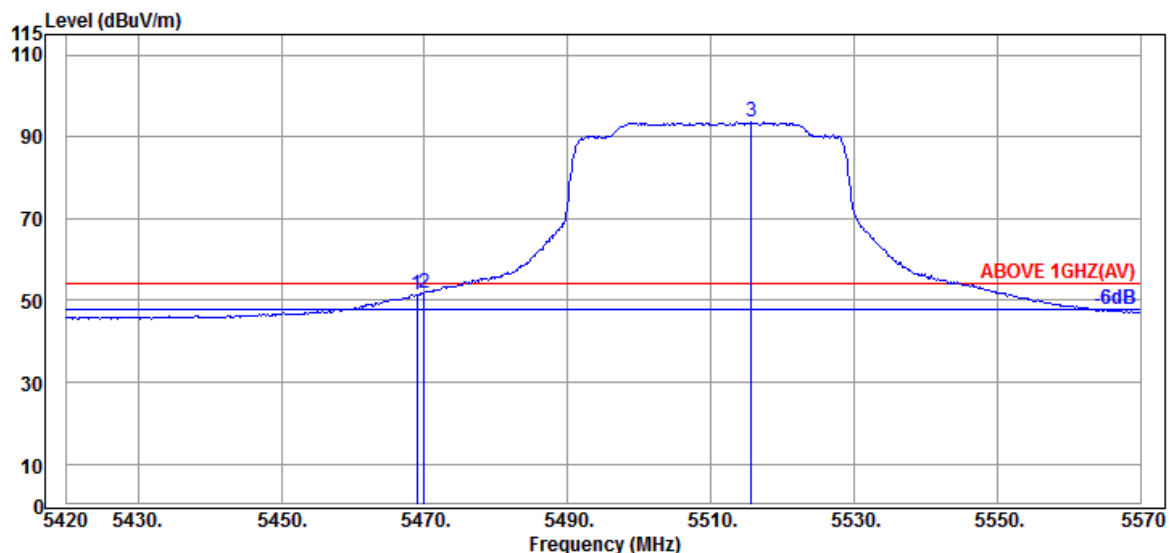

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.900                 | 34.47                 | 10.91           | 34.24                  | 40.33             | 51.47                   | 54.00           | 2.53        | Average  |
| 5469.950                 | 34.47                 | 10.91           | 34.24                  | 40.81             | 51.95                   | 54.00           | 2.05        | Average  |
| @ 5515.700               | 34.37                 | 10.93           | 34.24                  | 82.51             | 93.57                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | 2C         |
| RU Configuration | 484/66        | Frequency  | TX 5610MHz |

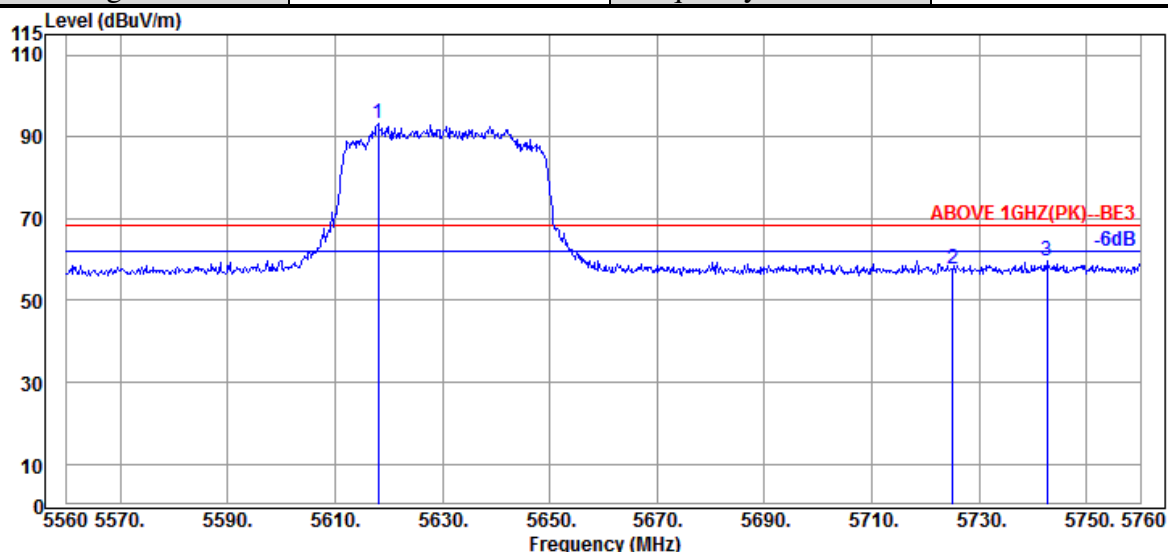

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5618.000               | 34.40                 | 10.99           | 34.28            | 82.10             | 93.21                   | ---             | ---         | Peak     |
| 5725.000                 | 34.67                 | 11.05           | 34.32            | 46.13             | 57.53                   | 68.20           | 10.67       | Peak     |
| 5742.600                 | 34.80                 | 11.05           | 34.33            | 48.10             | 59.62                   | 68.20           | 8.58        | Peak     |

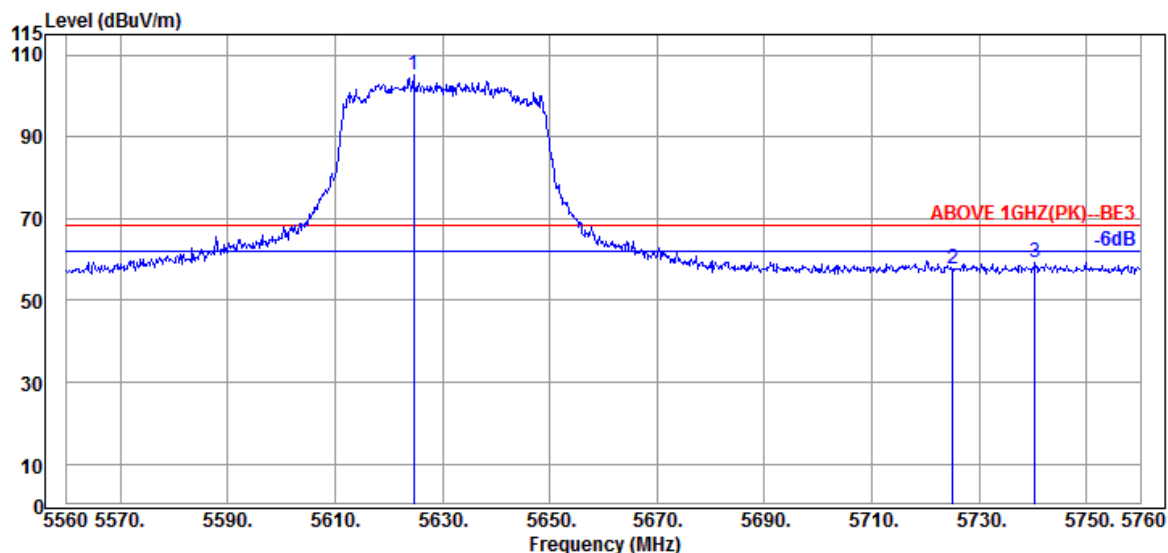

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5624.600               | 34.40                 | 10.99           | 34.28            | 93.95             | 105.06                  | ---             | ---         | Peak     |
| 5725.000                 | 34.67                 | 11.05           | 34.32            | 46.41             | 57.81                   | 68.20           | 10.39       | Peak     |
| 5740.400                 | 34.80                 | 11.05           | 34.33            | 47.84             | 59.36                   | 68.20           | 8.84        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2106154

Report Number: EM-F210482


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | III        |
| RU Configuration | 484/65        | Frequency  | TX 5775MHz |

#### Antenna at Horizontal Polarization

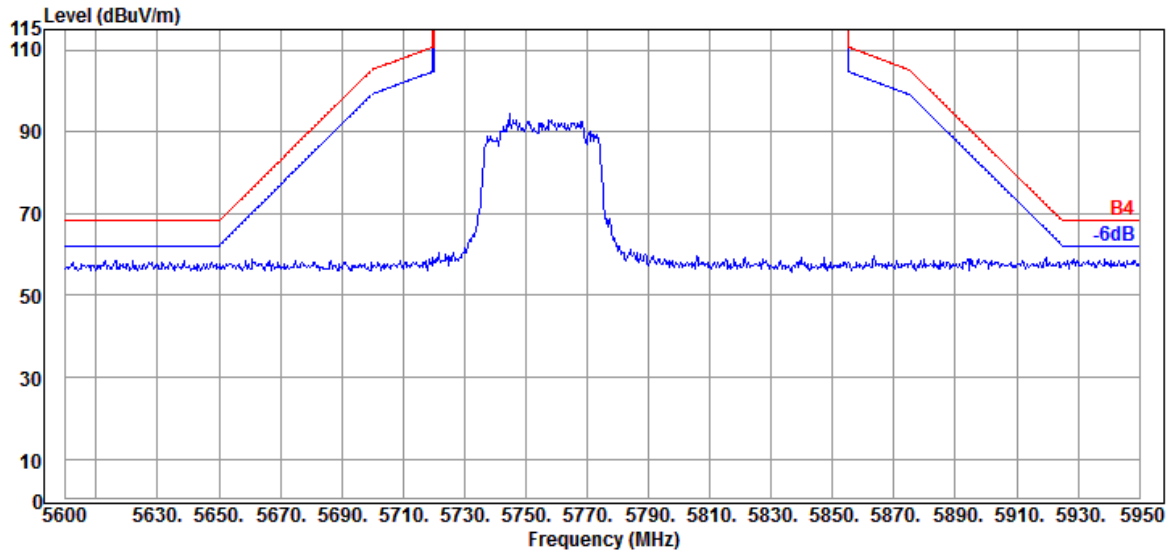

#### Antenna at Vertical Polarization

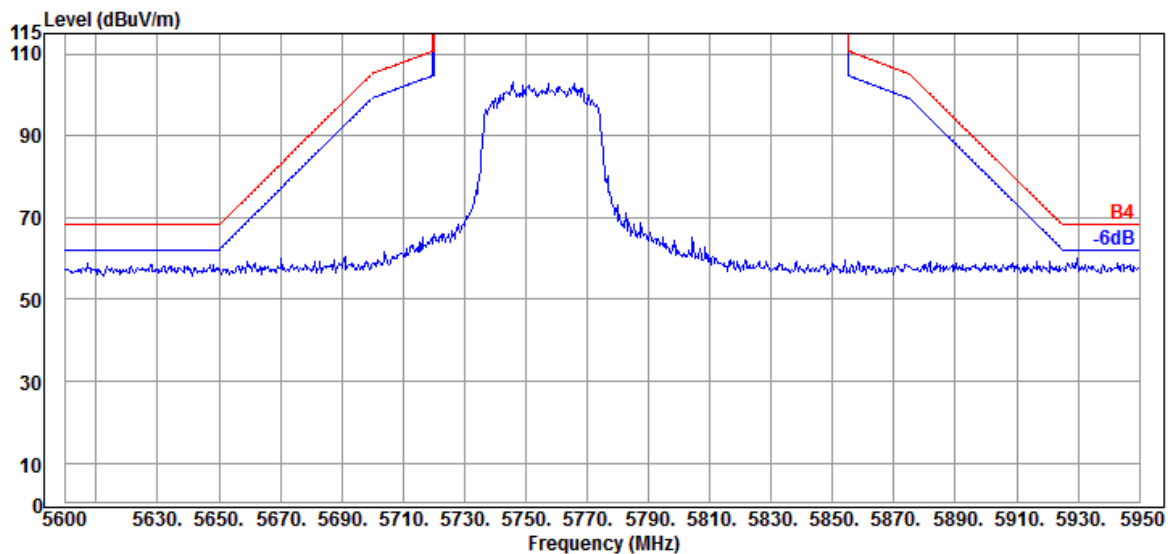


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |               |            |            |
|------------------|---------------|------------|------------|
| Mode             | 802.11ax-HE80 | U-NII Band | III        |
| RU Configuration | 484/66        | Frequency  | TX 5775MHz |


#### Antenna at Horizontal Polarization

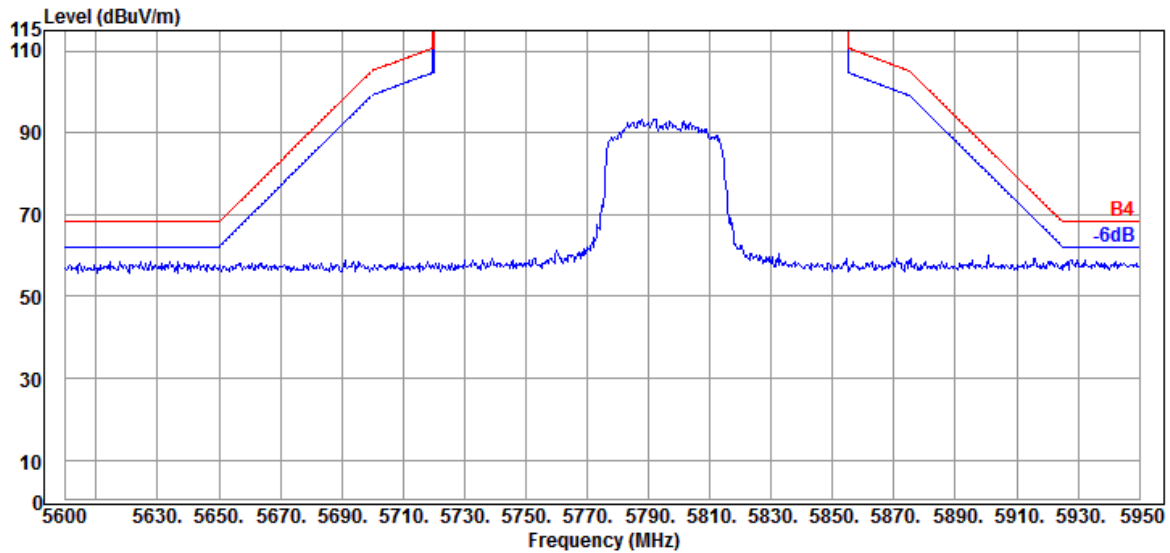

#### Antenna at Vertical Polarization

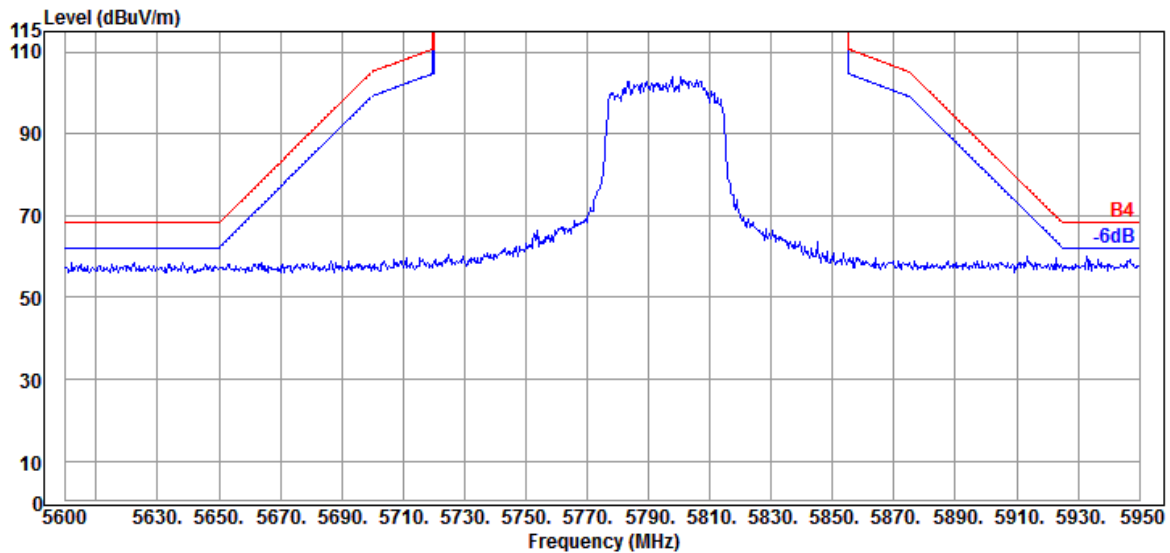


|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | I & 2A     |
| RU Configuration | 996/67         | Frequency  | TX 5250MHz |

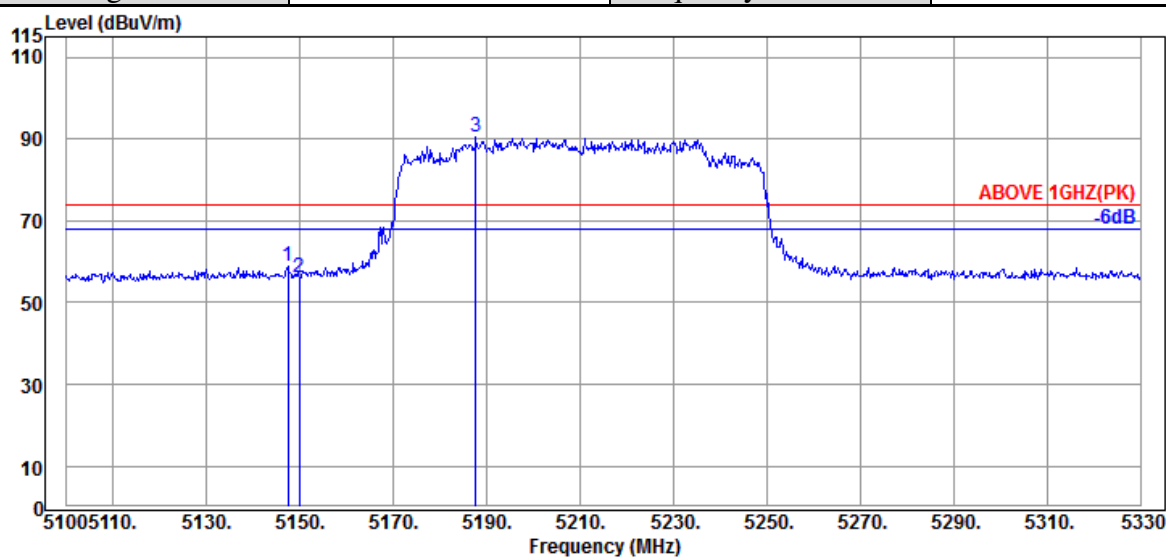

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.380                 | 34.20                 | 10.70           | 34.35                  | 48.19             | 58.74                   | 74.00           | 15.26       | Peak     |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 45.54             | 56.09                   | 74.00           | 17.91       | Peak     |
| @ 5187.630               | 34.20                 | 10.74           | 34.34                  | 79.70             | 90.30                   | ---             | ---         | Peak     |

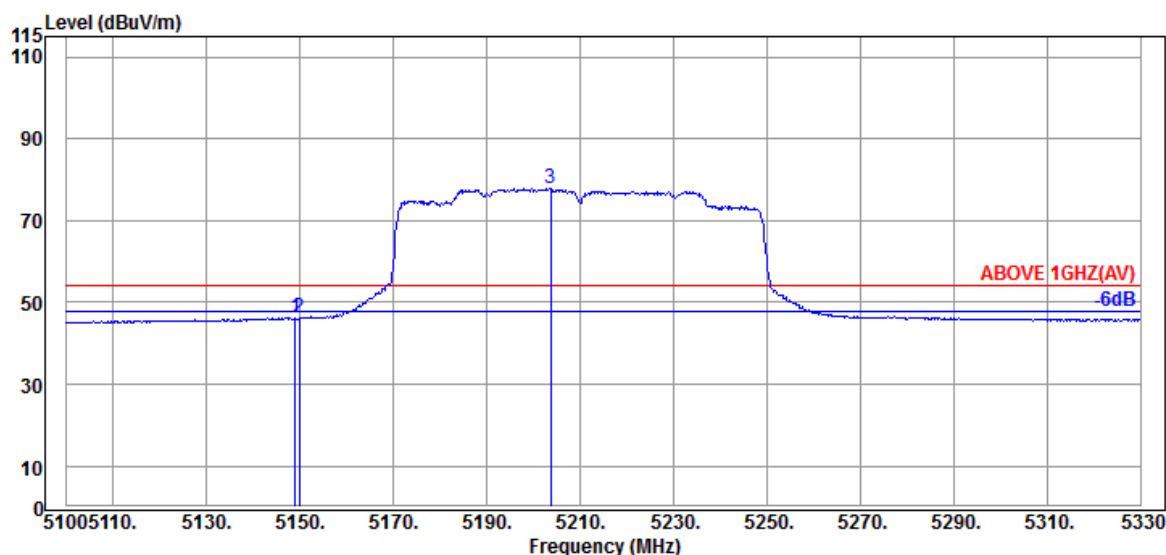


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.990                 | 34.20                 | 10.70           | 34.35                  | 35.71             | 46.26                   | 54.00           | 7.74        | Average  |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 35.49             | 46.04                   | 54.00           | 7.96        | Average  |
| @ 5203.730               | 34.25                 | 10.74           | 34.33                  | 67.29             | 77.95                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | I & 2A     |
| RU Configuration | 996/67         | Frequency  | TX 5250MHz |

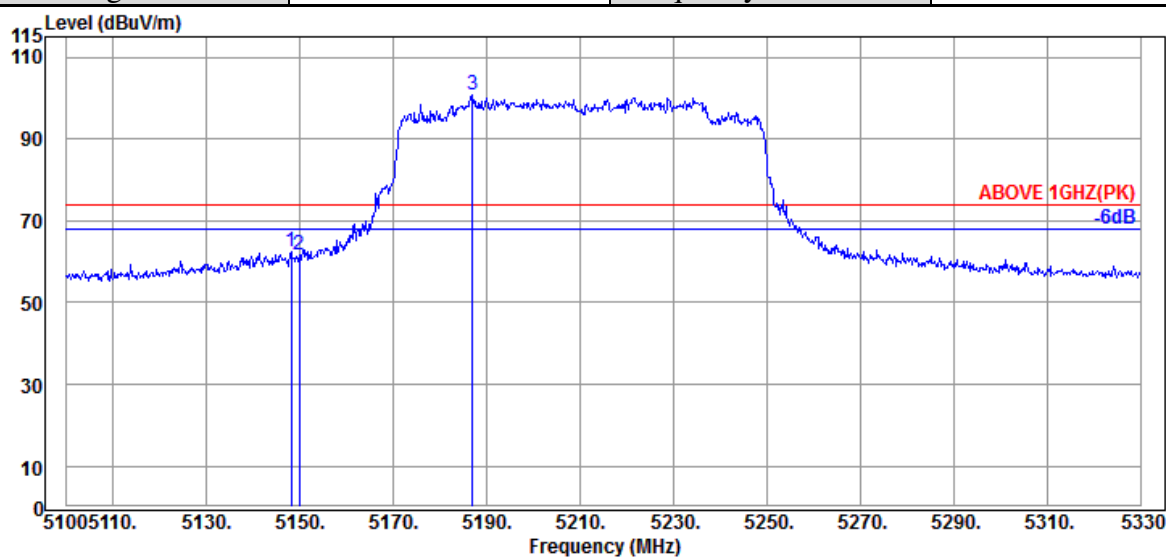

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.070                 | 34.20                 | 10.70           | 34.35                  | 51.76             | 62.31                   | 74.00           | 11.69       | Peak     |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 51.14             | 61.69                   | 74.00           | 12.31       | Peak     |
| @ 5186.940               | 34.20                 | 10.72           | 34.34                  | 90.12             | 100.70                  | ---             | ---         | Peak     |

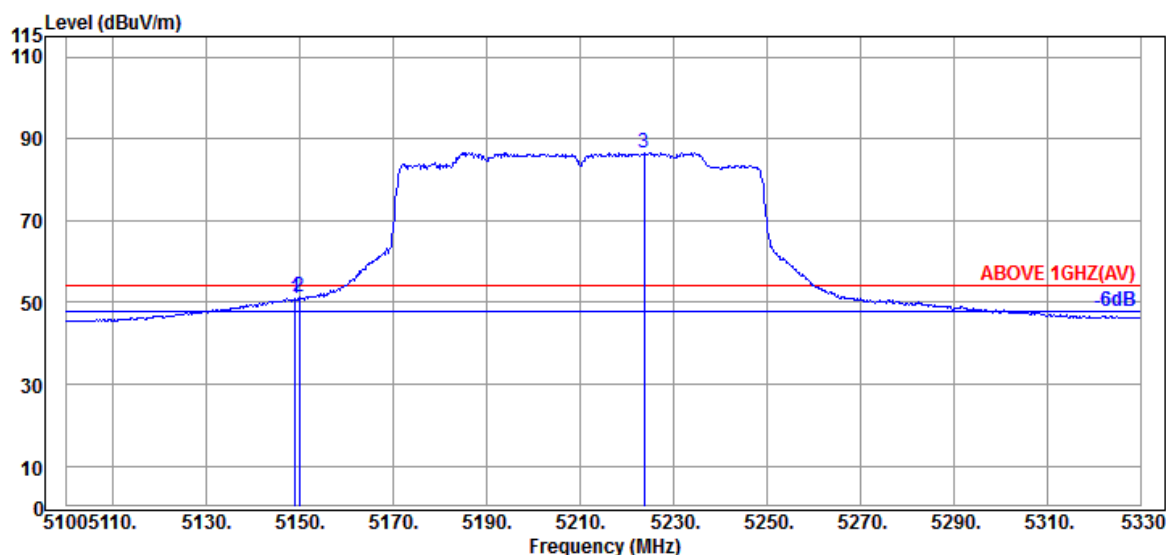


## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.990                 | 34.20                 | 10.70           | 34.35                  | 40.54             | 51.09                   | 54.00           | 2.91        | Average  |
| 5149.910                 | 34.20                 | 10.70           | 34.35                  | 40.64             | 51.19                   | 54.00           | 2.81        | Average  |
| @ 5223.740               | 34.30                 | 10.76           | 34.32                  | 75.91             | 86.65                   | ---             | ---         | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | I & 2A     |
| RU Configuration | 996/S67        | Frequency  | TX 5250MHz |

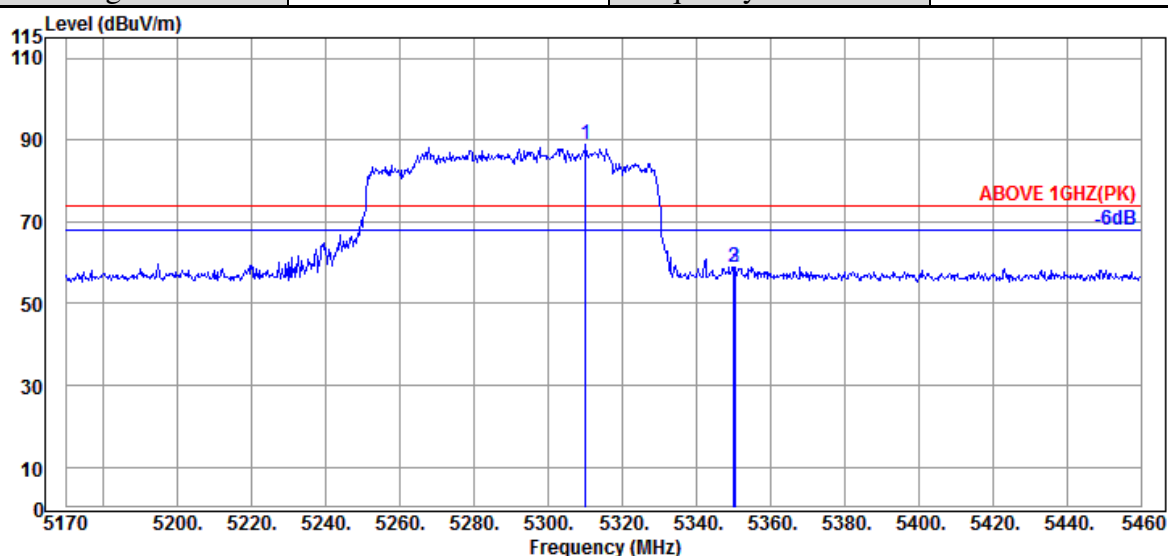

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5310.070               | 34.53                 | 10.81           | 34.29                  | 77.84             | 88.89                   | ---             | ---         | Peak     |
| 5350.090                 | 34.60                 | 10.83           | 34.27                  | 47.74             | 58.90                   | 74.00           | 15.10       | Peak     |
| 5350.380                 | 34.60                 | 10.83           | 34.27                  | 47.62             | 58.78                   | 74.00           | 15.22       | Peak     |

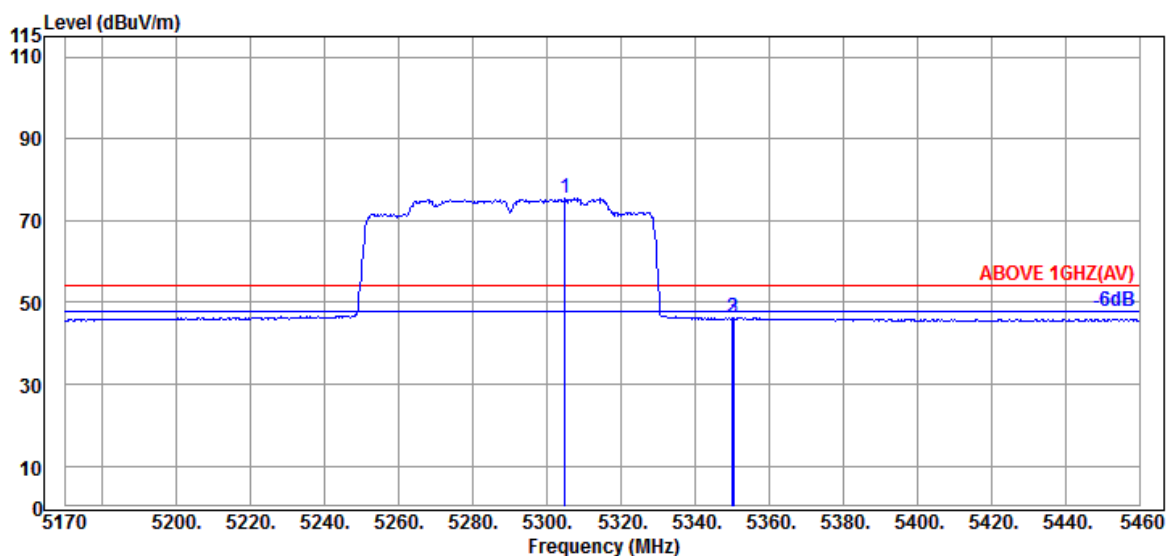


## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5304.850               | 34.50                 | 10.81           | 34.29                  | 64.60             | 75.62                   | ---             | ---         | Average  |
| 5350.090                 | 34.60                 | 10.83           | 34.27                  | 34.93             | 46.09                   | 54.00           | 7.91        | Average  |
| 5350.380                 | 34.60                 | 10.83           | 34.27                  | 35.05             | 46.21                   | 54.00           | 7.79        | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | I & 2A     |
| RU Configuration | 996/S67        | Frequency  | TX 5250MHz |

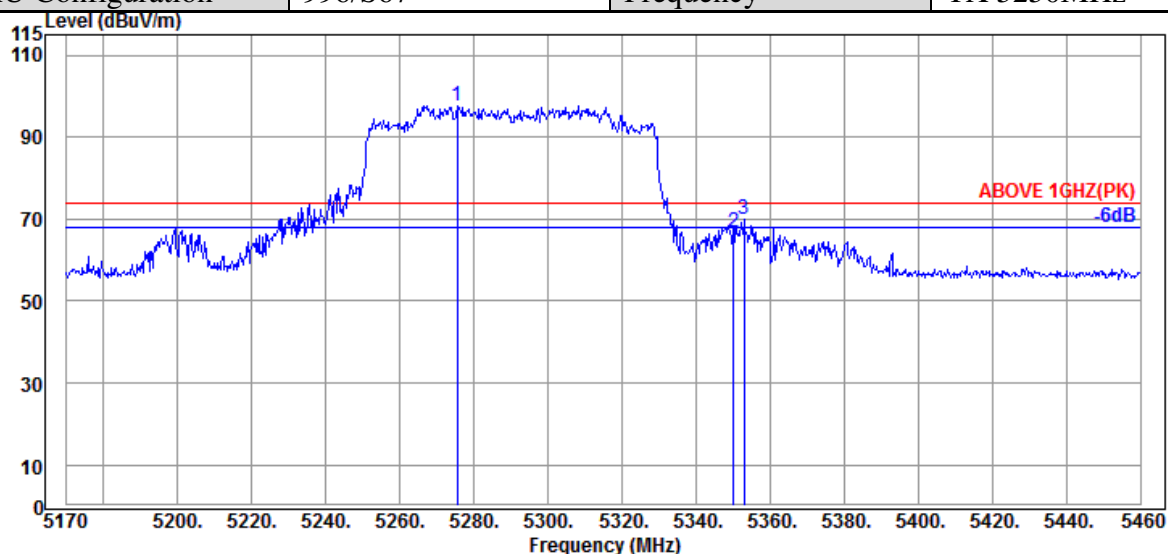

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5275.560               | 34.43                 | 10.79           | 34.30                  | 86.86             | 97.78                   | ---             | ---         | Peak     |
| 5350.090                 | 34.60                 | 10.83           | 34.27                  | 55.57             | 66.73                   | 74.00           | 7.27        | Peak     |
| 5352.990                 | 34.60                 | 10.83           | 34.27                  | 58.90             | 70.06                   | 74.00           | 3.94        | Peak     |

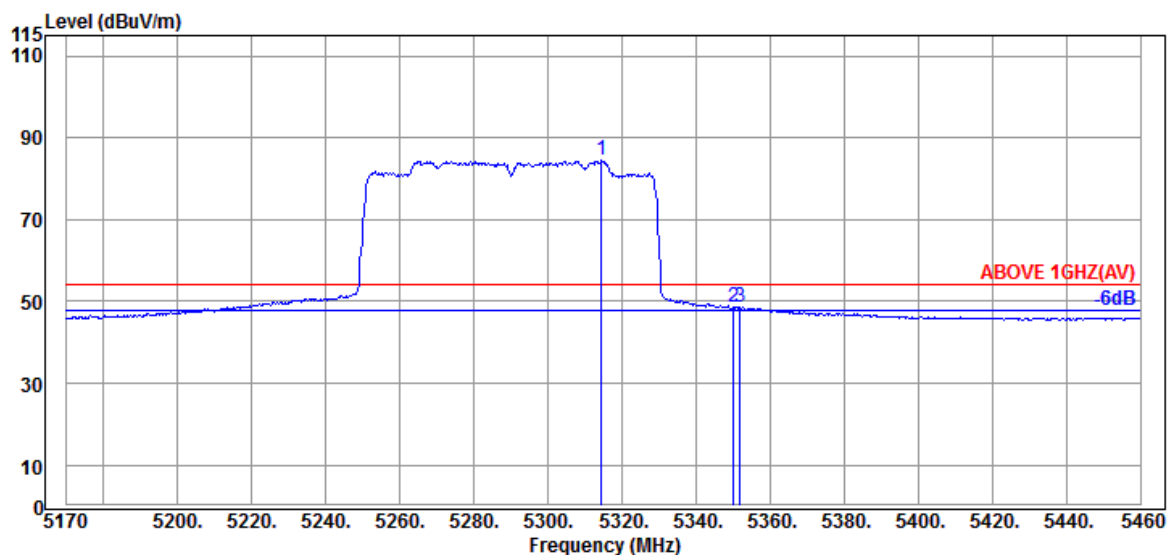


## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5314.420               | 34.53                 | 10.81           | 34.29                  | 73.48             | 84.53                   | ---             | ---         | Average  |
| 5350.090                 | 34.60                 | 10.83           | 34.27                  | 37.46             | 48.62                   | 54.00           | 5.38        | Average  |
| 5351.830                 | 34.60                 | 10.83           | 34.27                  | 37.56             | 48.72                   | 54.00           | 5.28        | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 2C         |
| RU Configuration | 996/67         | Frequency  | TX 5570MHz |

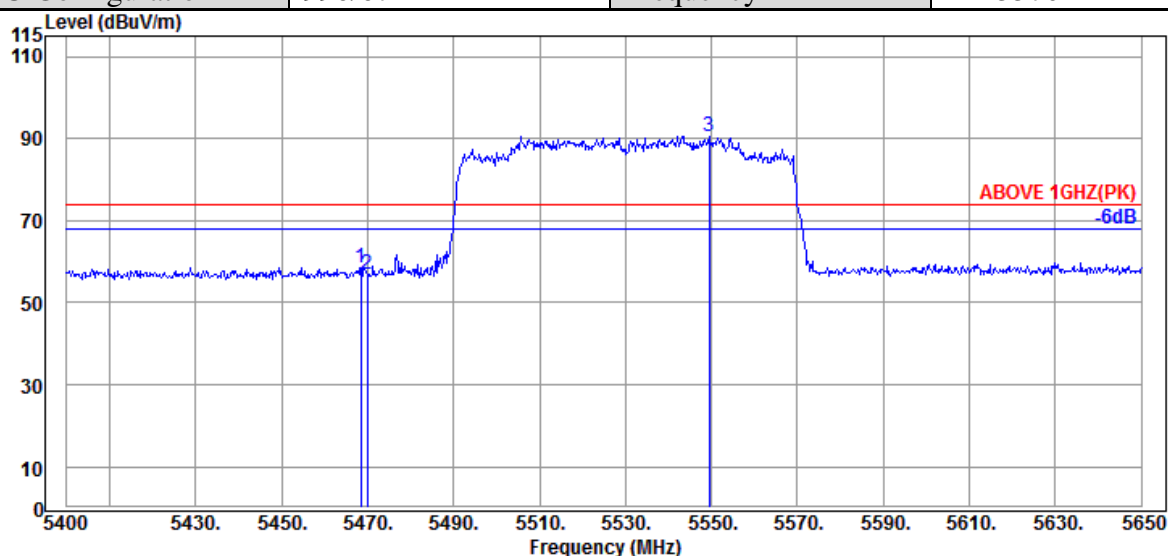

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.500                 | 34.47                 | 10.91           | 34.24            | 47.35             | 58.49                   | 74.00           | 15.51       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 45.88             | 57.02                   | 74.00           | 16.98       | Peak     |
| @ 5549.500               | 34.30                 | 10.95           | 34.25            | 79.69             | 90.69                   | ---             | ---         | Peak     |

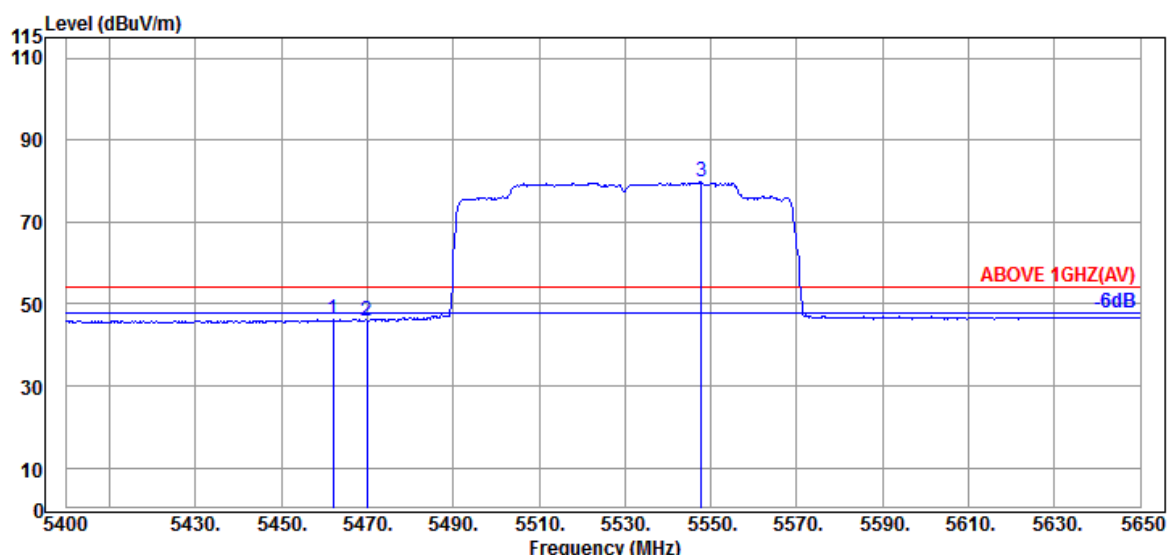

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5462.000                 | 34.50                 | 10.91           | 34.24            | 35.07             | 46.24                   | 54.00           | 7.76        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24            | 34.87             | 46.01                   | 54.00           | 7.99        | Average  |
| @ 5547.750               | 34.30                 | 10.95           | 34.25            | 68.76             | 79.76                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 2C         |
| RU Configuration | 996/67         | Frequency  | TX 5570MHz |

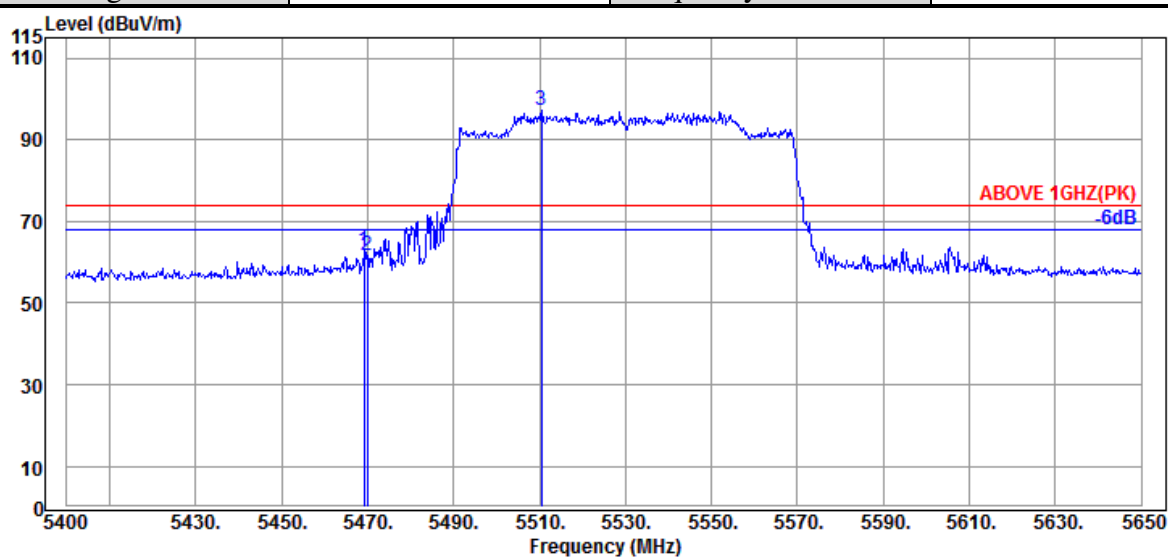

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.250                 | 34.47                 | 10.91           | 34.24                  | 51.51             | 62.65                   | 74.00           | 11.35       | Peak     |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 50.70             | 61.84                   | 74.00           | 12.16       | Peak     |
| @ 5510.500               | 34.40                 | 10.93           | 34.24                  | 86.18             | 97.27                   | ---             | ---         | Peak     |

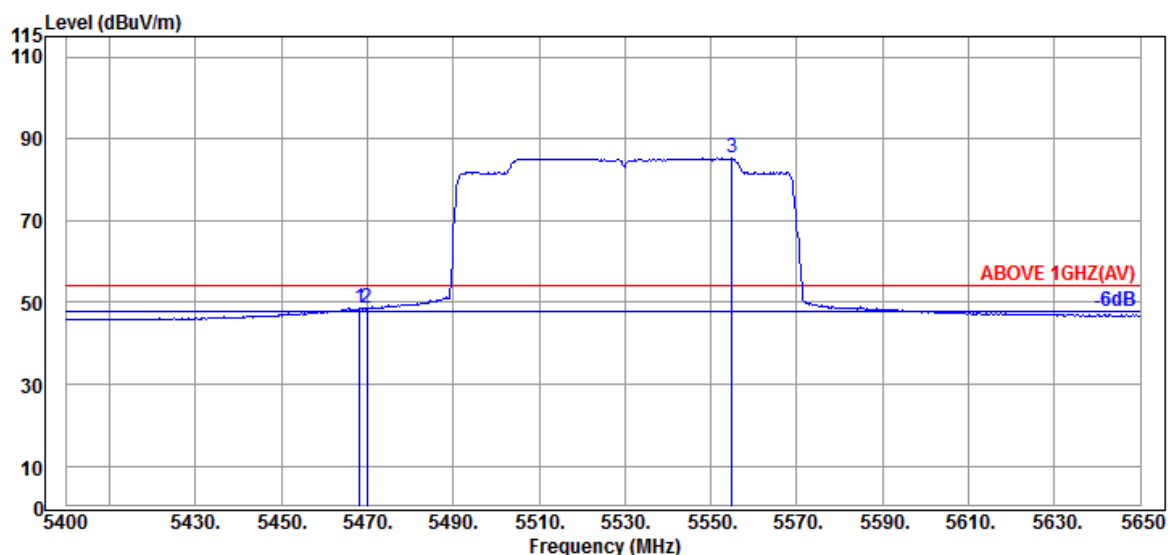

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.250                 | 34.47                 | 10.91           | 34.24                  | 37.35             | 48.49                   | 54.00           | 5.51        | Average  |
| 5470.000                 | 34.47                 | 10.91           | 34.24                  | 37.46             | 48.60                   | 54.00           | 5.40        | Average  |
| @ 5555.000               | 34.30                 | 10.95           | 34.26                  | 74.20             | 85.19                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2106154


Report Number: EM-F210482

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|                  |                |            |            |
|------------------|----------------|------------|------------|
| Mode             | 802.11ax-HE160 | U-NII Band | 2C         |
| RU Configuration | 996/S67        | Frequency  | TX 5570MHz |

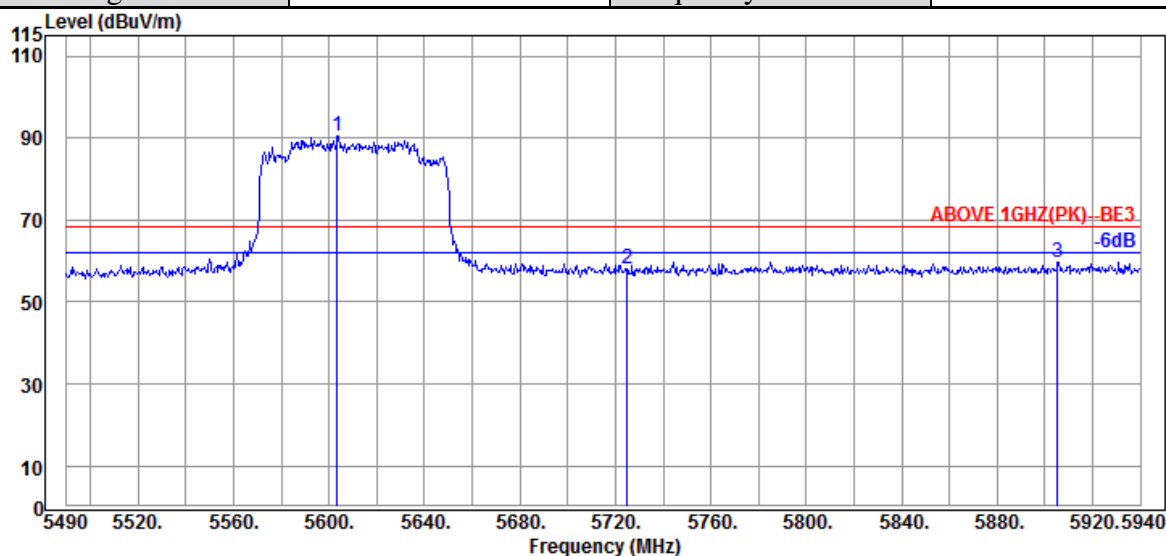

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5603.400                 | 34.40                 | 10.99           | 34.28            | 79.52             | 90.63                   | ---             | ---         | Peak     |
|   | 5724.900                 | 34.67                 | 11.05           | 34.32            | 46.81             | 58.21                   | 68.20           | 9.99        | Peak     |
|   | 5905.350                 | 35.40                 | 11.14           | 34.40            | 47.61             | 59.75                   | 68.20           | 8.45        | Peak     |

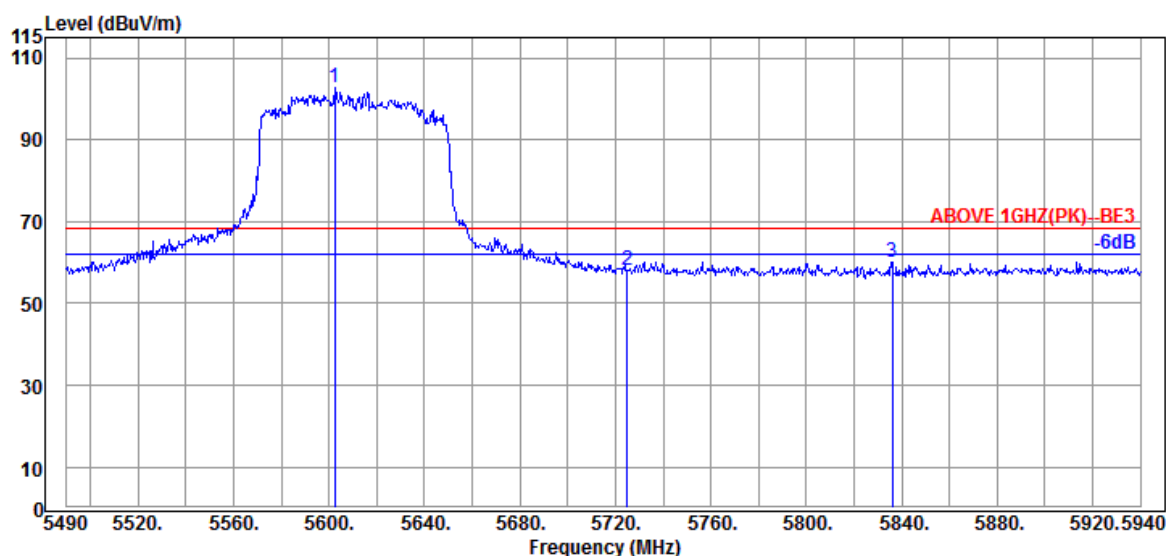

#### Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 5602.500                 | 34.40                 | 10.99           | 34.27            | 91.70             | 102.82                  | ---             | ---         | Peak     |
|   | 5724.900                 | 34.67                 | 11.05           | 34.32            | 46.82             | 58.22                   | 68.20           | 9.98        | Peak     |
|   | 5836.050                 | 35.07                 | 11.10           | 34.38            | 48.33             | 60.12                   | 68.20           | 8.08        | Peak     |

Remark: The "@" means fundamental frequency, it is ignored in this section.

**A.2.2 Emissions outside the frequency band**

The emissions (up to 40GHz) not reported for there is no emission be found.

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | I          |
|      |         | Frequency  | TX 5240MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10480.000                      | 37.75                       | 14.94                 | 34.71                  | 30.77                   | 48.75                         | 54.00              | 5.25           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10480.000                      | 37.75                       | 14.94                 | 34.71                  | 30.74                   | 48.72                         | 54.00              | 5.28           | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2A         |
|      |         | Frequency  | TX 5260MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10520.000                      | 37.80                       | 14.98                 | 34.69                  | 30.19                   | 48.28                         | 54.00              | 5.72           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 10520.000                      | 37.80                       | 14.98                 | 34.69                  | 30.25                   | 48.34                         | 54.00              | 5.66           | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5580MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.13                 | 15.36           | 34.57                  | 30.48             | 49.40                   | 54.00           | 4.60        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.13                 | 15.36           | 34.57                  | 33.43             | 52.35                   | 54.00           | 1.65        | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C         |
|      |         | Frequency  | TX 5720MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.40                 | 15.59           | 34.59                  | 30.15             | 49.55                   | 54.00           | 4.45        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.40                 | 15.59           | 34.59                  | 31.88             | 51.28                   | 54.00           | 2.72        | Peak     |

|      |         |            |            |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | III        |
|      |         | Frequency  | TX 5745MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11490.000                | 38.40                 | 15.65           | 34.59                  | 30.01             | 49.47                   | 54.00           | 4.53        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11490.000                | 38.40                 | 15.65           | 34.59                  | 31.48             | 50.94                   | 54.00           | 3.06        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | I          |
|      |              | Frequency  | TX 5240MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 37.75                 | 14.94           | 34.71                  | 30.55             | 48.53                   | 54.00           | 5.47        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 37.75                 | 14.94           | 34.71                  | 30.89             | 48.87                   | 54.00           | 5.13        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5260MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000                | 37.80                 | 14.98           | 34.69                  | 30.74             | 48.83                   | 54.00           | 5.17        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000                | 37.80                 | 14.98           | 34.69                  | 30.53             | 48.62                   | 54.00           | 5.38        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5580MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.13                 | 15.36           | 34.57                  | 29.54             | 48.46                   | 54.00           | 5.54        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.13                 | 15.36           | 34.57                  | 30.75             | 49.67                   | 54.00           | 4.33        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5720MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.40                 | 15.59           | 34.59                  | 29.89             | 49.29                   | 54.00           | 4.71        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.40                 | 15.59           | 34.59                  | 31.07             | 50.47                   | 54.00           | 3.53        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | III        |
|      |              | Frequency  | TX 5785MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 38.47                 | 15.71           | 34.61                  | 31.13             | 50.70                   | 54.00           | 3.30        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 38.47                 | 15.71           | 34.61                  | 31.08             | 50.65                   | 54.00           | 3.35        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | I          |
|      |              | Frequency  | TX 5230MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000                | 37.70                 | 14.94           | 34.74                  | 30.75             | 48.65                   | 54.00           | 5.35        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000                | 37.70                 | 14.94           | 34.74                  | 30.43             | 48.33                   | 54.00           | 5.67        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A         |
|      |              | Frequency  | TX 5270MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000                | 37.83                 | 14.98           | 34.68                  | 31.63             | 49.76                   | 54.00           | 4.24        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000                | 37.83                 | 14.98           | 34.68                  | 30.56             | 48.69                   | 54.00           | 5.31        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5670MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11340.000                | 38.27                 | 15.53           | 34.58                  | 29.86             | 49.08                   | 54.00           | 4.92        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11340.000                | 38.27                 | 15.53           | 34.58                  | 29.73             | 48.95                   | 54.00           | 5.05        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C         |
|      |              | Frequency  | TX 5710MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.40                 | 15.59           | 34.59                  | 29.97             | 49.37                   | 54.00           | 4.63        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.40                 | 15.59           | 34.59                  | 30.40             | 49.80                   | 54.00           | 4.20        | Peak     |

|      |              |            |            |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | III        |
|      |              | Frequency  | TX 5795MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000                | 38.50                 | 15.71           | 34.61                  | 31.92             | 51.52                   | 54.00           | 2.48        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000                | 38.50                 | 15.71           | 34.61                  | 30.77             | 50.37                   | 54.00           | 3.63        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | I          |
|      |                | Frequency  | TX 5210MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 37.65                 | 14.94           | 34.78                  | 31.71             | 49.52                   | 54.00           | 4.48        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 37.65                 | 14.94           | 34.78                  | 30.44             | 48.25                   | 54.00           | 5.75        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A         |
|      |                | Frequency  | TX 5290MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 37.87                 | 15.02           | 34.67                  | 29.39             | 47.61                   | 54.00           | 6.39        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 37.87                 | 15.02           | 34.67                  | 30.24             | 48.46                   | 54.00           | 5.54        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5610MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.20                 | 15.42           | 34.57                  | 29.15             | 48.20                   | 54.00           | 5.80        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.20                 | 15.42           | 34.57                  | 29.86             | 48.91                   | 54.00           | 5.09        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5690MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.33                 | 15.53           | 34.58                  | 28.81             | 48.09                   | 54.00           | 5.91        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.33                 | 15.53           | 34.58                  | 29.04             | 48.32                   | 54.00           | 5.68        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | III        |
|      |                | Frequency  | TX 5775MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 38.43                 | 15.71           | 34.60                  | 30.24             | 49.78                   | 54.00           | 4.22        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 38.43                 | 15.71           | 34.60                  | 31.91             | 51.45                   | 54.00           | 2.55        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | I/2A       |
|      |                 | Frequency  | TX 5250MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 37.80                 | 14.98           | 34.69                  | 30.57             | 48.66                   | 54.00           | 5.34        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 37.80                 | 14.98           | 34.69                  | 30.39             | 48.48                   | 54.00           | 5.52        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C         |
|      |                 | Frequency  | TX 5570MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.07                 | 15.36           | 34.57                  | 30.06             | 48.92                   | 54.00           | 5.08        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.07                 | 15.36           | 34.57                  | 30.01             | 48.87                   | 54.00           | 5.13        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | I          |
|      |               | Frequency  | TX 5240MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 37.75                 | 14.94           | 34.71                  | 30.93             | 48.91                   | 54.00           | 5.09        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000                | 37.75                 | 14.94           | 34.71                  | 31.86             | 49.84                   | 54.00           | 4.16        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5260MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000                | 37.80                 | 14.98           | 34.69                  | 30.62             | 48.71                   | 54.00           | 5.29        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000                | 37.80                 | 14.98           | 34.69                  | 30.77             | 48.86                   | 54.00           | 5.14        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5580MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.13                 | 15.36           | 34.57                  | 30.23             | 49.15                   | 54.00           | 4.85        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000                | 38.13                 | 15.36           | 34.57                  | 30.23             | 49.15                   | 54.00           | 4.85        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5720MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.40                 | 15.59           | 34.59                  | 30.68             | 50.08                   | 54.00           | 3.92        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000                | 38.40                 | 15.59           | 34.59                  | 31.03             | 50.43                   | 54.00           | 3.57        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | III        |
|      |               | Frequency  | TX 5785MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 38.47                 | 15.71           | 34.61                  | 30.58             | 50.15                   | 54.00           | 3.85        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000                | 38.47                 | 15.71           | 34.61                  | 31.62             | 51.19                   | 54.00           | 2.81        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | I          |
|      |               | Frequency  | TX 5230MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000                | 37.70                 | 14.94           | 34.74                  | 30.88             | 48.78                   | 54.00           | 5.22        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000                | 37.70                 | 14.94           | 34.74                  | 30.13             | 48.03                   | 54.00           | 5.97        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5270MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000                | 37.83                 | 14.98           | 34.68                  | 31.11             | 49.24                   | 54.00           | 4.76        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000                | 37.83                 | 14.98           | 34.68                  | 30.71             | 48.84                   | 54.00           | 5.16        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5670MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11340.000                | 38.27                 | 15.53           | 34.58                  | 30.79             | 50.01                   | 54.00           | 3.99        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11340.000                | 38.27                 | 15.53           | 34.58                  | 30.49             | 49.71                   | 54.00           | 4.29        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5710MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.40                 | 15.59           | 34.59                  | 30.24             | 49.64                   | 54.00           | 4.36        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000                | 38.40                 | 15.59           | 34.59                  | 30.35             | 49.75                   | 54.00           | 4.25        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | III        |
|      |               | Frequency  | TX 5795MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000                | 38.50                 | 15.71           | 34.61                  | 31.37             | 50.97                   | 54.00           | 3.03        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000                | 38.50                 | 15.71           | 34.61                  | 29.05             | 48.65                   | 54.00           | 5.35        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | I          |
|      |               | Frequency  | TX 5210MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 37.65                 | 14.94           | 34.78                  | 31.16             | 48.97                   | 54.00           | 5.03        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000                | 37.65                 | 14.94           | 34.78                  | 29.94             | 47.75                   | 54.00           | 6.25        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A         |
|      |               | Frequency  | TX 5290MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 37.87                 | 15.02           | 34.67                  | 30.59             | 48.81                   | 54.00           | 5.19        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000                | 37.87                 | 15.02           | 34.67                  | 29.09             | 47.31                   | 54.00           | 6.69        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5610MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.20                 | 15.42           | 34.57                  | 30.55             | 49.60                   | 54.00           | 4.40        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000                | 38.20                 | 15.42           | 34.57                  | 30.25             | 49.30                   | 54.00           | 4.70        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C         |
|      |               | Frequency  | TX 5690MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.33                 | 15.53           | 34.58                  | 30.50             | 49.78                   | 54.00           | 4.22        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000                | 38.33                 | 15.53           | 34.58                  | 31.05             | 50.33                   | 54.00           | 3.67        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | III        |
|      |               | Frequency  | TX 5775MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 38.43                 | 15.71           | 34.60                  | 30.27             | 49.81                   | 54.00           | 4.19        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000                | 38.43                 | 15.71           | 34.60                  | 31.38             | 50.92                   | 54.00           | 3.08        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | I/2A       |
|      |                | Frequency  | TX 5250MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 37.80                 | 14.98           | 34.69                  | 30.59             | 48.68                   | 54.00           | 5.32        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000                | 37.80                 | 14.98           | 34.69                  | 30.84             | 48.93                   | 54.00           | 5.07        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C         |
|      |                | Frequency  | TX 5570MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.07                 | 15.36           | 34.57                  | 31.37             | 50.23                   | 54.00           | 3.77        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000                | 38.07                 | 15.36           | 34.57                  | 30.21             | 49.07                   | 54.00           | 4.93        | Peak     |

## A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.