


**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11n-HT40 | Frequency | TX 2462MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

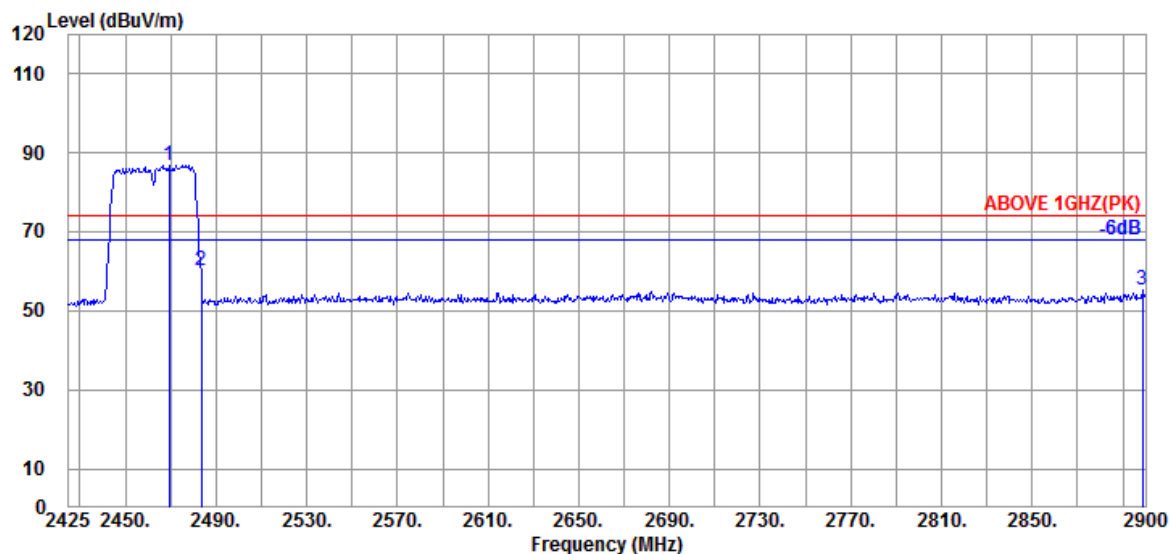

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2469.175                 | 28.62                 | 8.57            | 49.76                | 86.95                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 22.83                | 60.11                   | 74.00           | 13.89       | Peak     |
|   | 2898.575                 | 29.59                 | 8.69            | 17.14                | 55.42                   | 74.00           | 18.58       | Peak     |

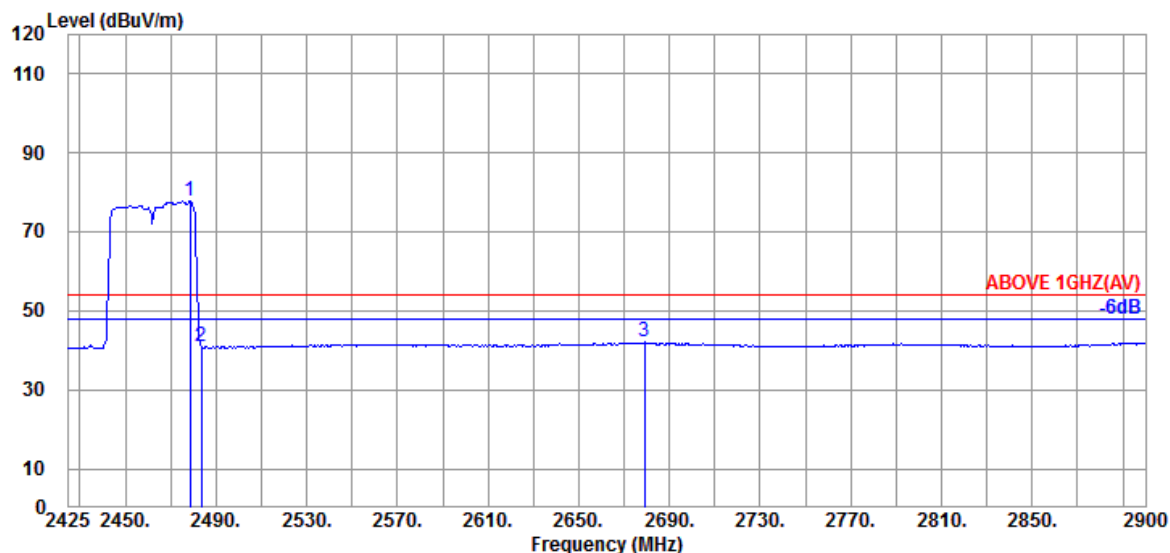


Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2478.675                 | 28.67                 | 8.58            | 40.45                | 77.70                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 3.80                 | 41.08                   | 54.00           | 12.92       | Average  |
|   | 2679.125                 | 29.02                 | 8.63            | 4.34                 | 41.99                   | 54.00           | 12.01       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| Mode | 802.11n-HT40 | Frequency | TX 2462MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

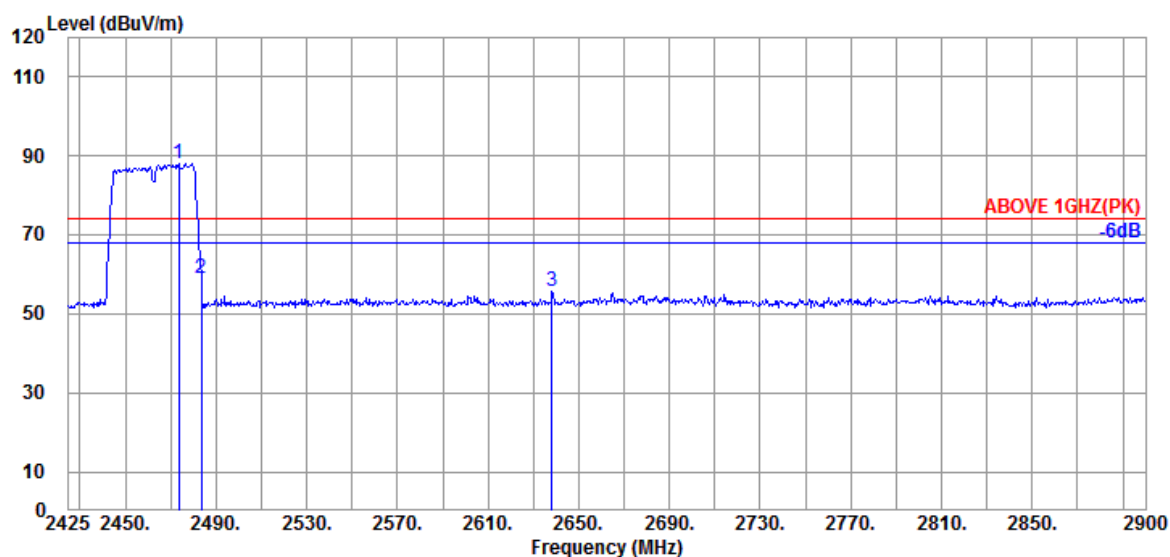

Antenna at Vertical Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBUV/m) | Limits<br>(dBUV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 2473.450                       | 28.64                       | 8.58                  | 50.86                      | 88.08                         | ---                | ---            | Peak     |
|   | 2483.425                       | 28.70                       | 8.58                  | 21.52                      | 58.80                         | 74.00              | 15.20          | Peak     |
|   | 2638.275                       | 28.95                       | 8.62                  | 18.06                      | 55.63                         | 74.00              | 18.37          | Peak     |

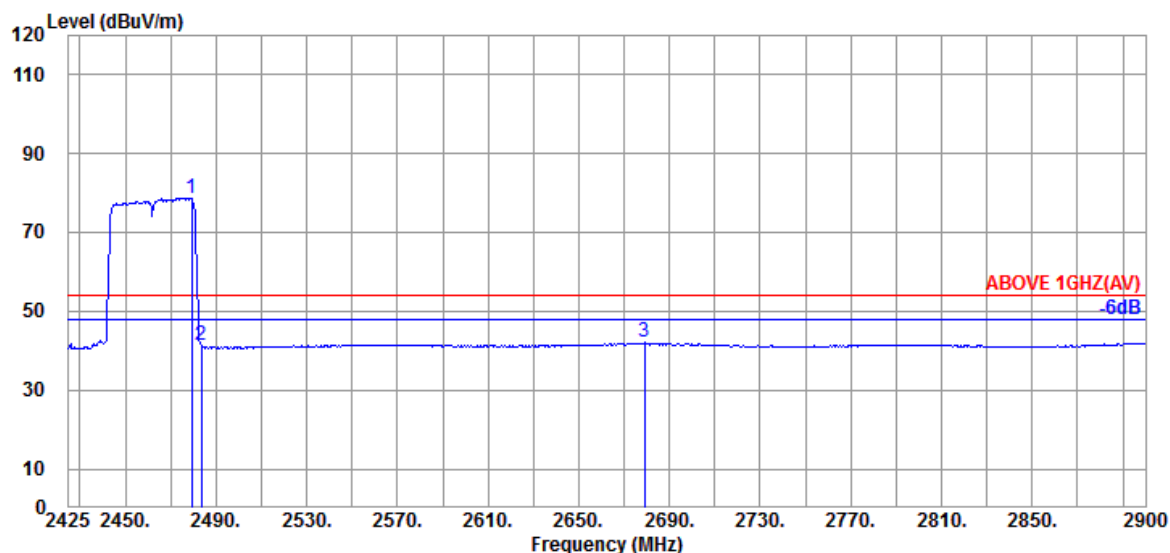

Antenna at Vertical Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBUV/m) | Limits<br>(dBUV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 2479.150                       | 28.67                       | 8.58                  | 41.53                      | 78.78                         | ---                | ---            | Average  |
|   | 2483.425                       | 28.70                       | 8.58                  | 3.96                       | 41.24                         | 54.00              | 12.76          | Average  |
|   | 2679.125                       | 29.02                       | 8.63                  | 4.34                       | 41.99                         | 54.00              | 12.01          | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035

Report Number: EM-F200116


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

| Mode | 802.11ax-HE20 | Frequency | TX 2412MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

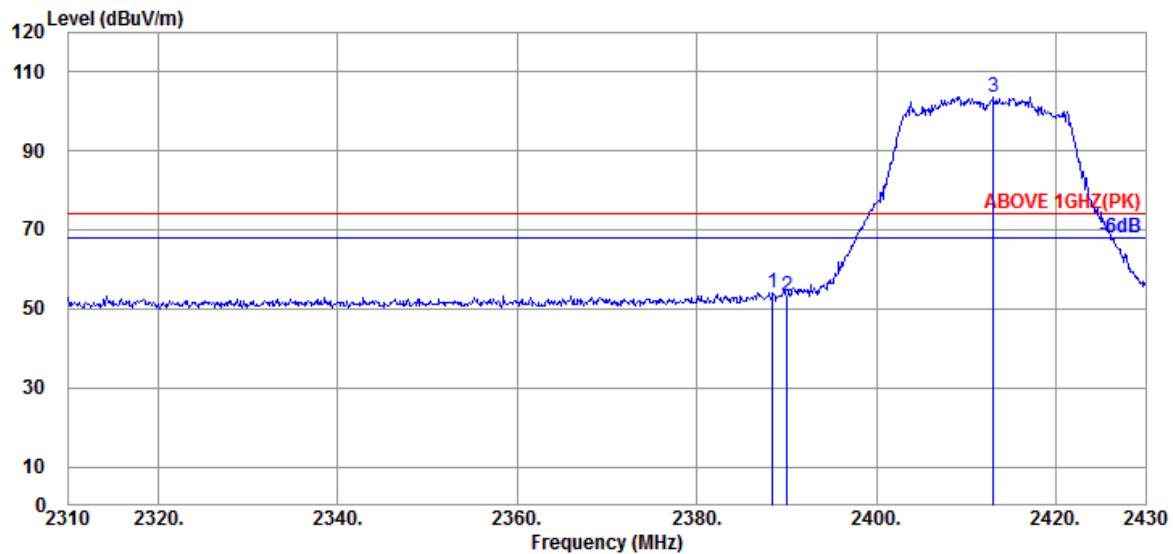

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2388.480                 | 28.31                 | 8.52            | 17.39                | 54.22                   | 74.00           | 19.78       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 16.44                | 53.28                   | 74.00           | 20.72       | Peak     |
| @ 2413.080               | 28.43                 | 8.53            | 66.68                | 103.64                  | ---             | ---         | Peak     |

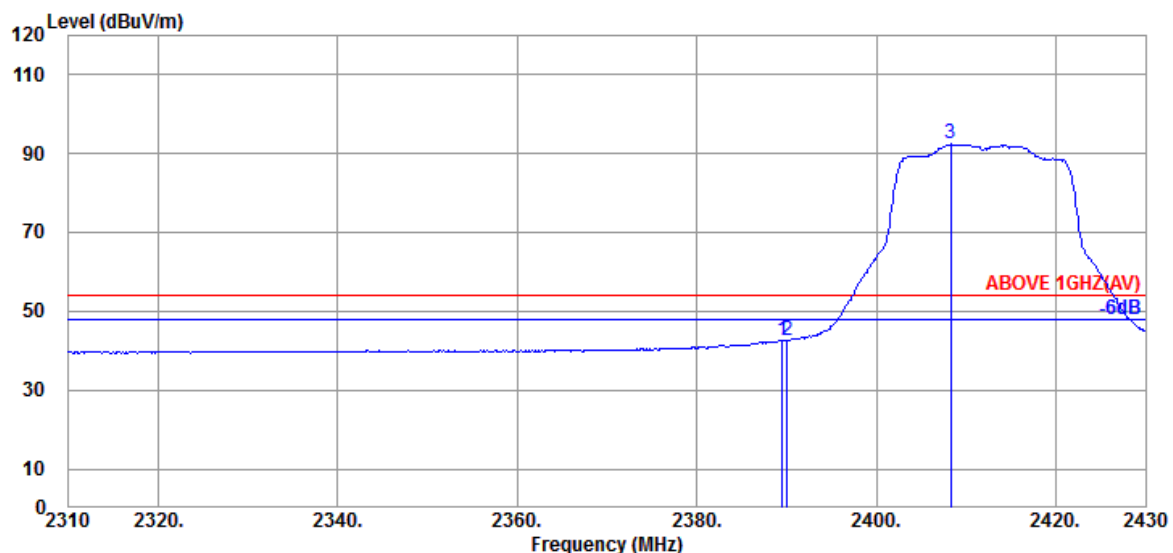

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.560                 | 28.32                 | 8.52            | 5.92                 | 42.76                   | 54.00           | 11.24       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 5.76                 | 42.60                   | 54.00           | 11.40       | Average  |
| @ 2408.280               | 28.42                 | 8.53            | 55.49                | 92.44                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency | TX 2412MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

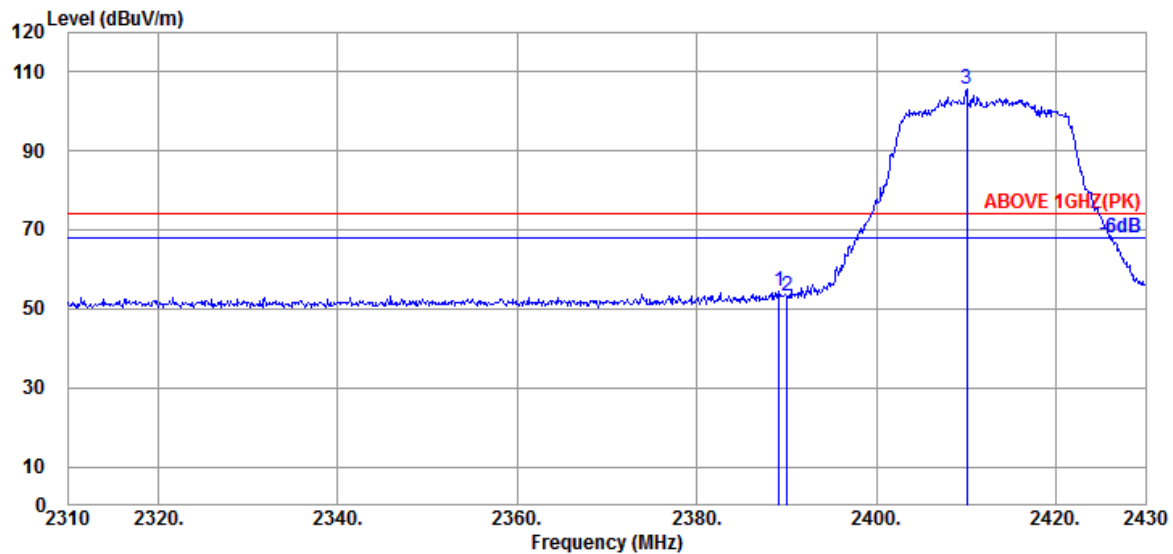

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.200                 | 28.31                 | 8.52            | 17.51                | 54.34                   | 74.00           | 19.66       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 16.58                | 53.42                   | 74.00           | 20.58       | Peak     |
| @ 2410.080               | 28.42                 | 8.53            | 68.55                | 105.50                  | ---             | ---         | Peak     |

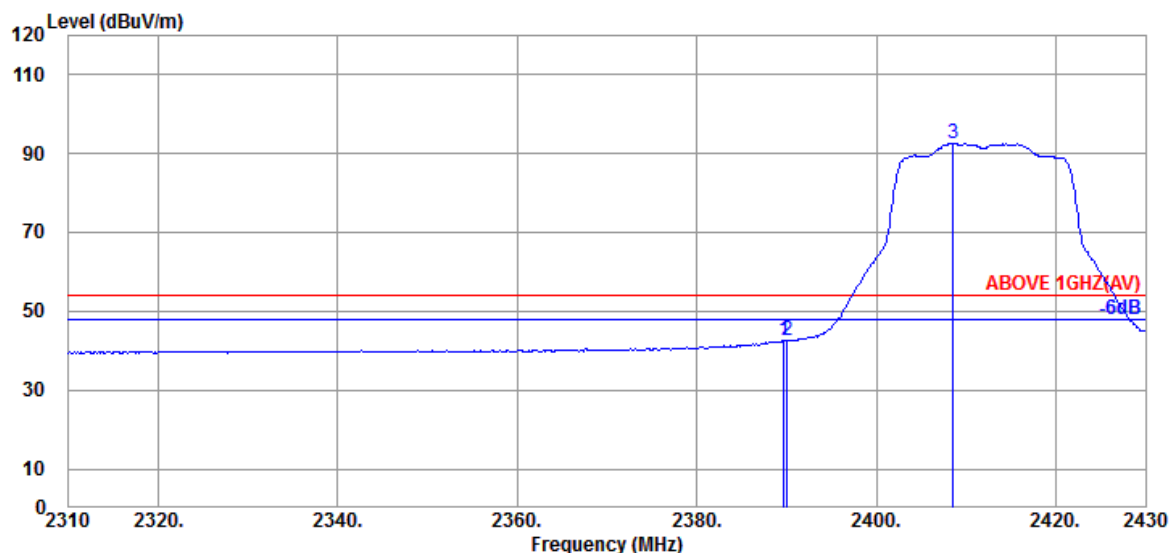

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.680                 | 28.32                 | 8.52            | 5.71                 | 42.55                   | 54.00           | 11.45       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 5.59                 | 42.43                   | 54.00           | 11.57       | Average  |
| @ 2408.520               | 28.42                 | 8.53            | 55.63                | 92.58                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035

Report Number: EM-F200116


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

| Mode | 802.11ax-HE20 | Frequency | TX 2417MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

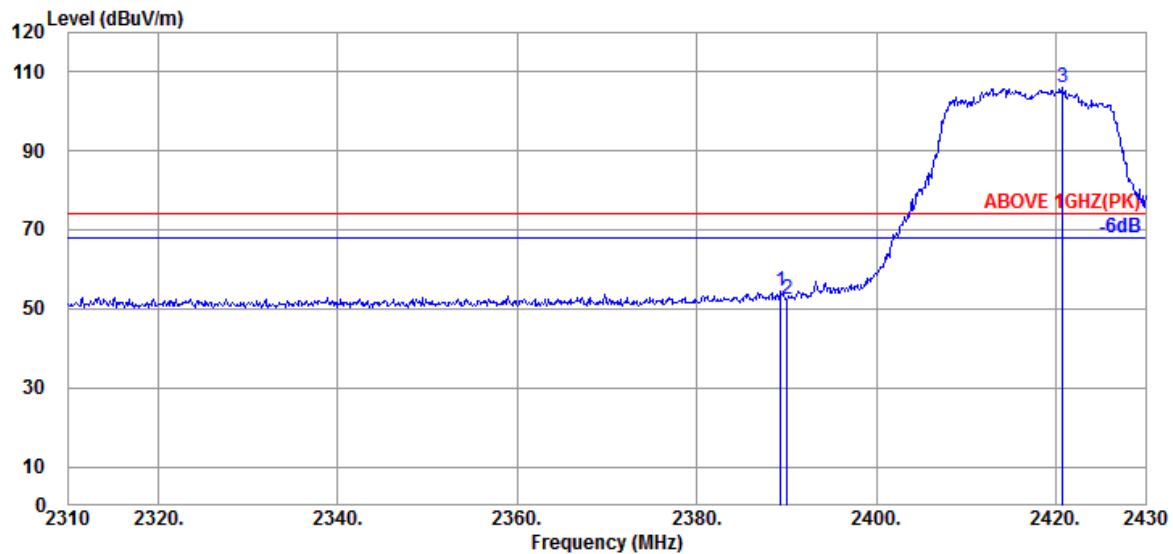

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.320                 | 28.31                 | 8.52            | 17.66                | 54.49                   | 74.00           | 19.51       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 15.67                | 52.51                   | 74.00           | 21.49       | Peak     |
| @ 2420.760               | 28.44                 | 8.54            | 69.03                | 106.01                  | ---             | ---         | Peak     |

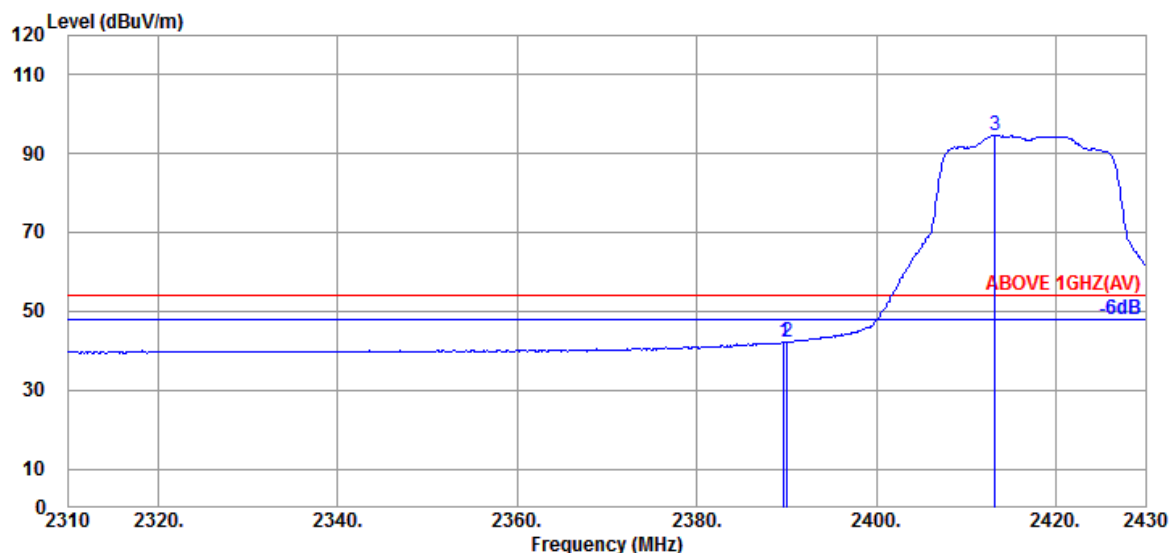


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.680                 | 28.32                 | 8.52            | 5.29                 | 42.13                   | 54.00           | 11.87       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 5.21                 | 42.05                   | 54.00           | 11.95       | Average  |
| @ 2413.200               | 28.43                 | 8.53            | 57.68                | 94.64                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| Mode | 802.11ax-HE20 | Frequency | TX 2417MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

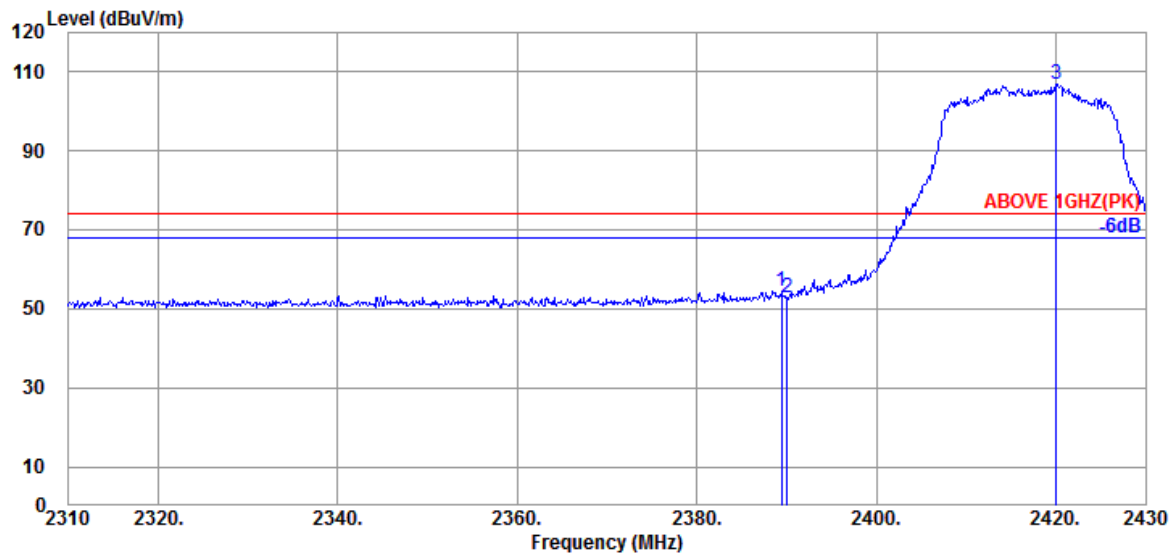

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.440                 | 28.32                 | 8.52            | 17.68                | 54.52                   | 74.00           | 19.48       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 16.09                | 52.93                   | 74.00           | 21.07       | Peak     |
| @ 2420.040               | 28.44                 | 8.54            | 70.08                | 107.06                  | ---             | ---         | Peak     |

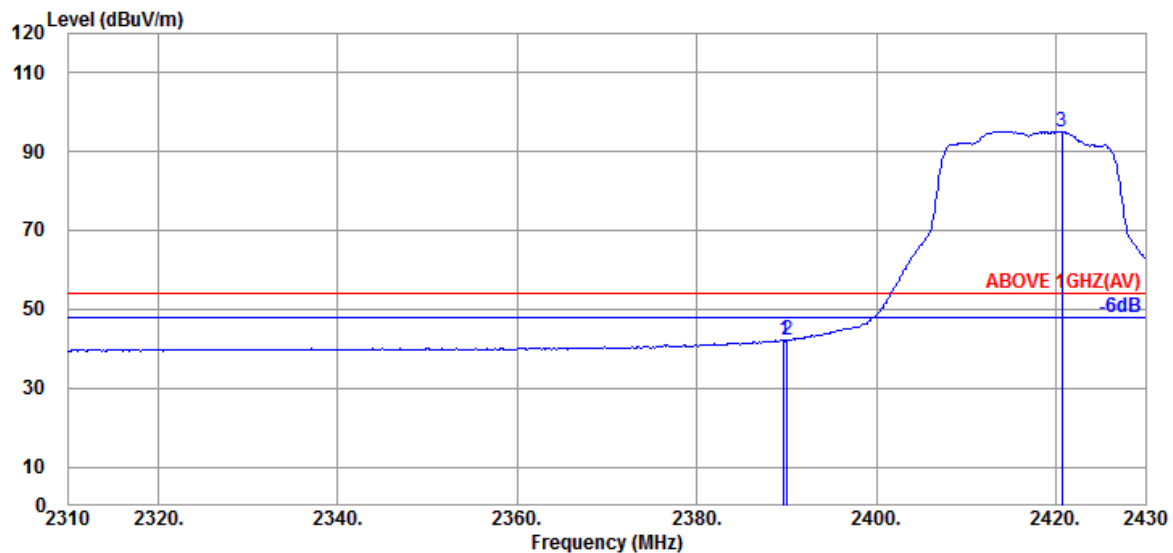

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.680                 | 28.32                 | 8.52            | 5.37                 | 42.21                   | 54.00           | 11.79       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 5.34                 | 42.18                   | 54.00           | 11.82       | Average  |
| @ 2420.640               | 28.44                 | 8.54            | 58.17                | 95.15                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency | TX 2457MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

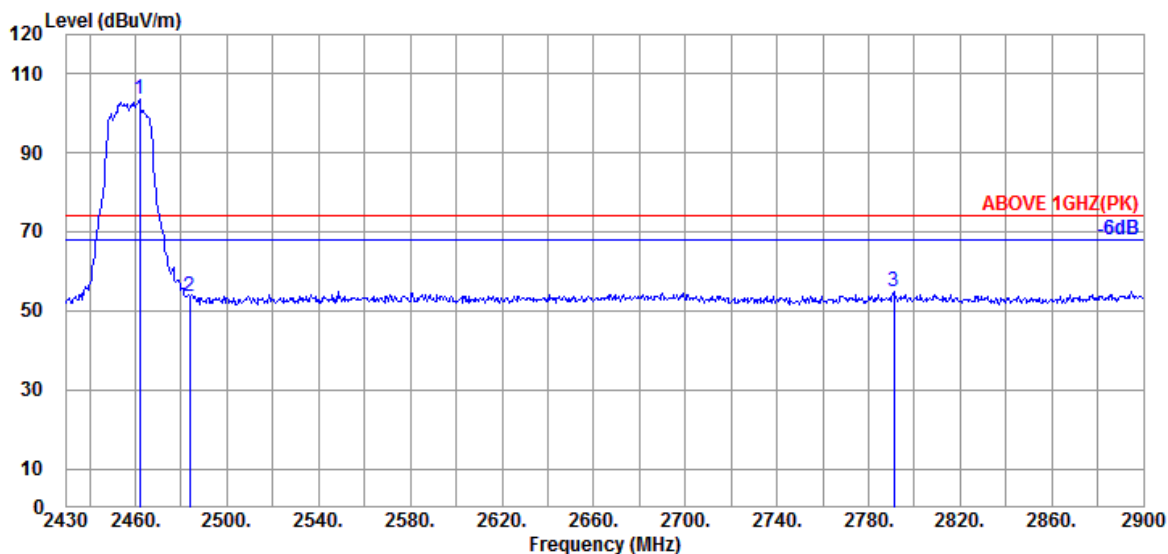

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2461.960                 | 28.57                 | 8.57            | 66.30                | 103.44                  | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 16.33                | 53.61                   | 74.00           | 20.39       | Peak     |
|   | 2790.960                 | 29.06                 | 8.66            | 17.16                | 54.88                   | 74.00           | 19.12       | Peak     |

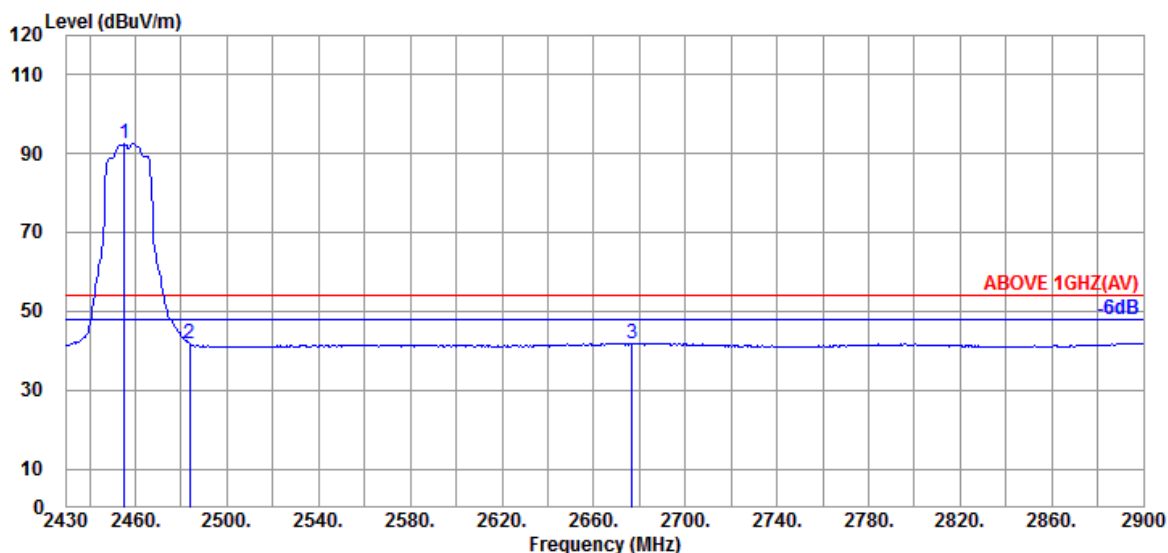

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2455.380                 | 28.53                 | 8.57            | 55.40                | 92.50                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 4.45                 | 41.73                   | 54.00           | 12.27       | Average  |
|   | 2676.750                 | 29.01                 | 8.63            | 4.27                 | 41.91                   | 54.00           | 12.09       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035

Report Number: EM-F200116


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

| Mode | 802.11ax-HE20 | Frequency | TX 2457MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

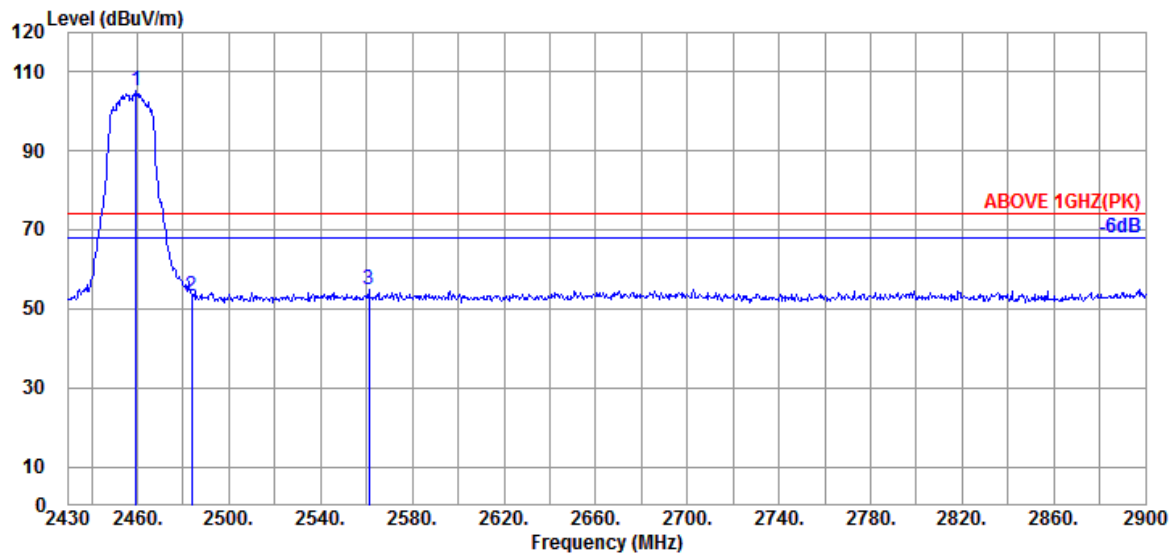

Antenna at Vertical Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBUV/m) | Limits<br>(dBUV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 2459.610                       | 28.56                       | 8.57                  | 68.01                      | 105.14                        | ---                | ---            | Peak     |
|   | 2483.580                       | 28.70                       | 8.58                  | 16.14                      | 53.42                         | 74.00              | 20.58          | Peak     |
|   | 2561.130                       | 28.94                       | 8.61                  | 17.44                      | 54.99                         | 74.00              | 19.01          | Peak     |

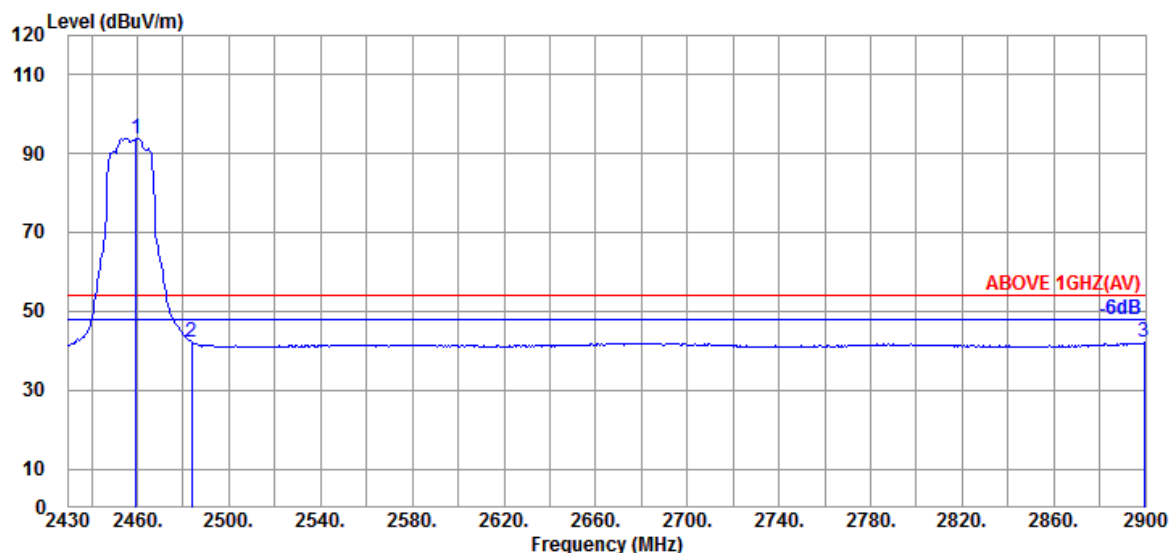

Antenna at Vertical Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBUV/m) | Limits<br>(dBUV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 2459.610                       | 28.56                       | 8.57                  | 56.76                      | 93.89                         | ---                | ---            | Average  |
|   | 2483.580                       | 28.70                       | 8.58                  | 4.73                       | 42.01                         | 54.00              | 11.99          | Average  |
|   | 2899.530                       | 29.60                       | 8.69                  | 3.72                       | 42.01                         | 54.00              | 11.99          | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency | TX 2462MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

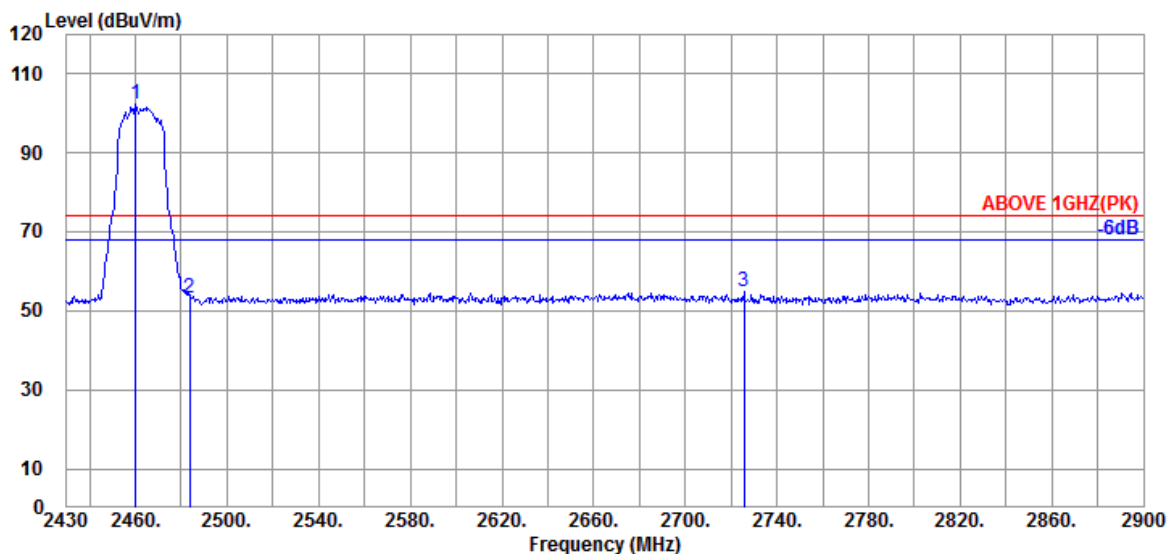

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2460.080                 | 28.56                 | 8.57            | 65.23                | 102.36                  | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 16.04                | 53.32                   | 74.00           | 20.68       | Peak     |
|   | 2725.630                 | 29.00                 | 8.65            | 17.15                | 54.80                   | 74.00           | 19.20       | Peak     |

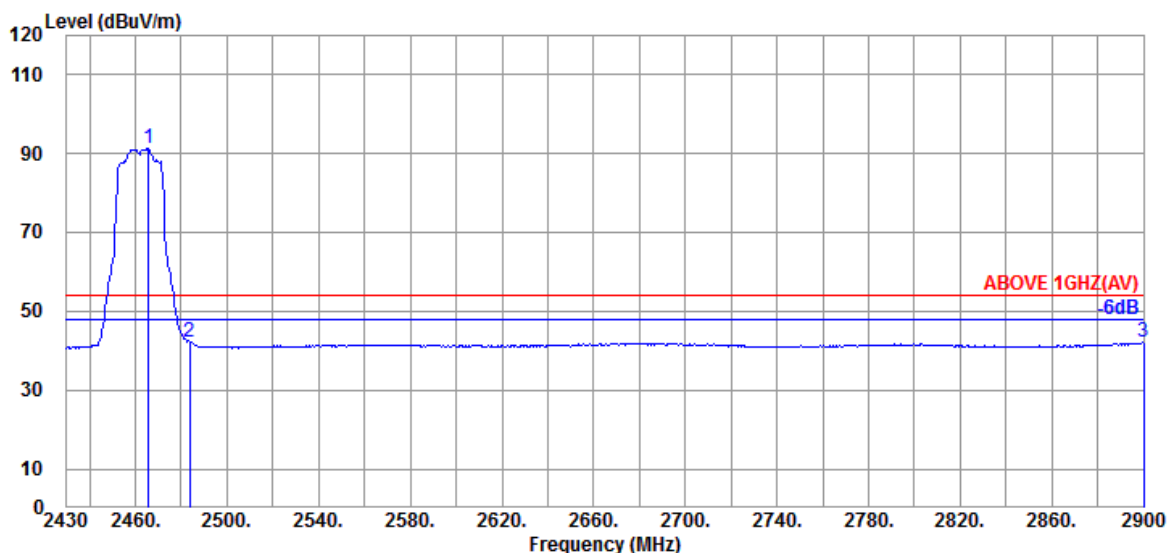

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2465.720                 | 28.59                 | 8.57            | 54.09                | 91.25                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 4.99                 | 42.27                   | 54.00           | 11.73       | Average  |
|   | 2900.000                 | 29.60                 | 8.69            | 3.79                 | 42.08                   | 54.00           | 11.92       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency | TX 2462MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

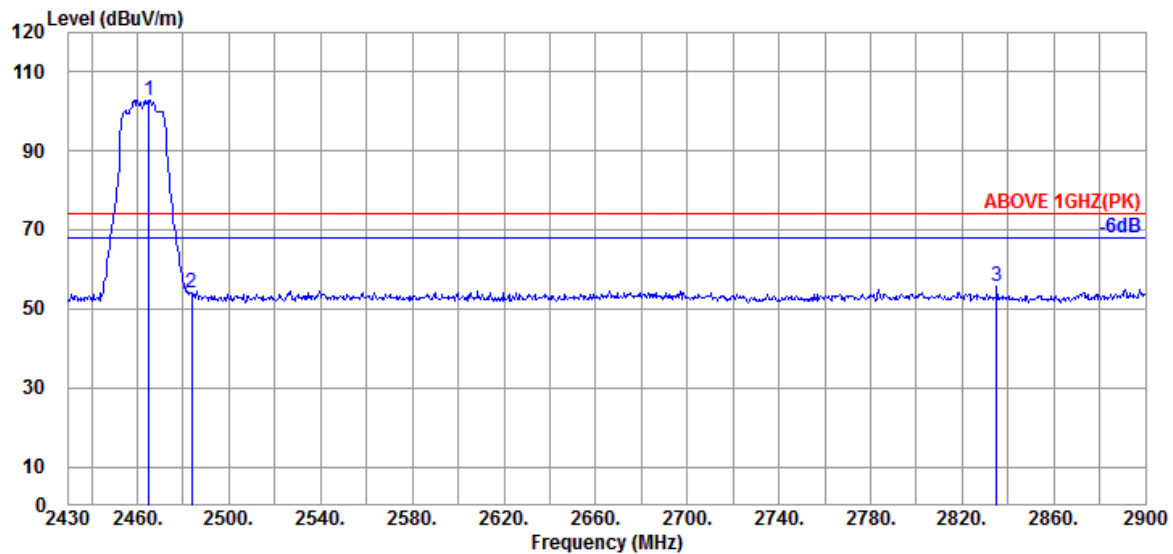

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2465.250                 | 28.59                 | 8.57            | 65.75                | 102.91                  | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 16.96                | 54.24                   | 74.00           | 19.76       | Peak     |
|   | 2835.140                 | 29.10                 | 8.67            | 17.86                | 55.63                   | 74.00           | 18.37       | Peak     |

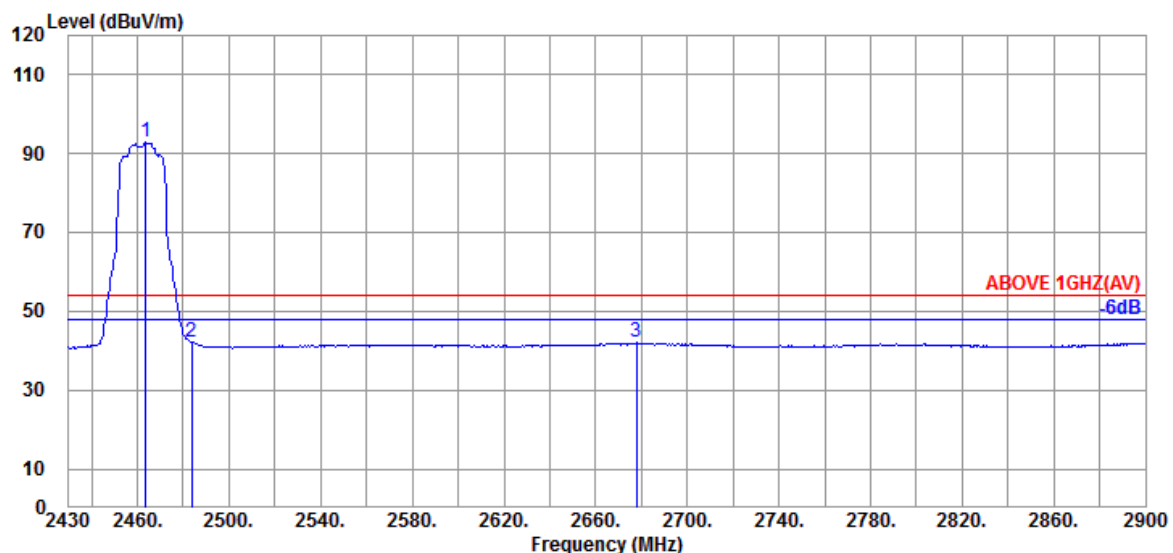

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2463.840                 | 28.58                 | 8.57            | 55.74                | 92.89                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 4.97                 | 42.25                   | 54.00           | 11.75       | Average  |
|   | 2677.690                 | 29.01                 | 8.63            | 4.44                 | 42.08                   | 54.00           | 11.92       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency | TX 2467MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

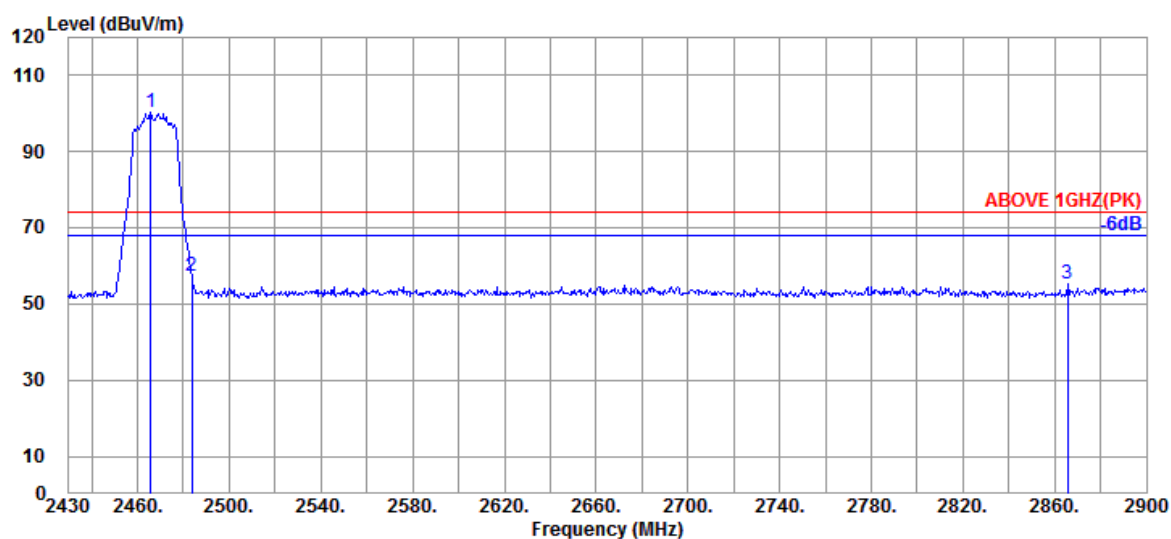

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2465.720                 | 28.59                 | 8.57            | 62.98                | 100.14                  | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 19.98                | 57.26                   | 74.00           | 16.74       | Peak     |
|   | 2865.690                 | 29.26                 | 8.68            | 17.22                | 55.16                   | 74.00           | 18.84       | Peak     |

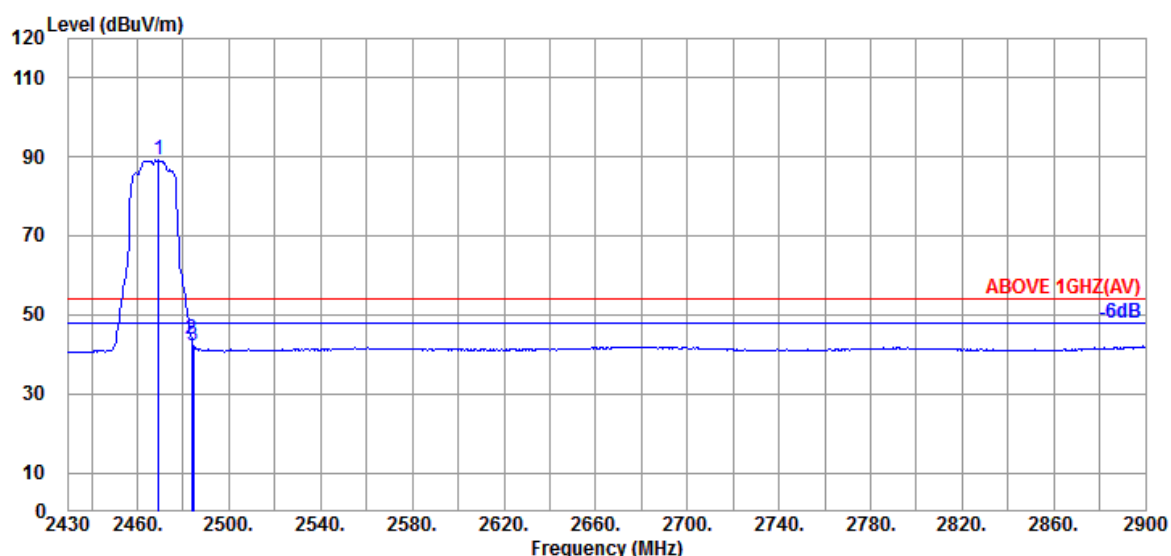


## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2469.480                 | 28.62                 | 8.57            | 52.12                | 89.31                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 6.75                 | 44.03                   | 54.00           | 9.97        | Average  |
|   | 2484.520                 | 28.71                 | 8.58            | 4.88                 | 42.17                   | 54.00           | 11.83       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| Mode | 802.11ax-HE20 | Frequency | TX 2467MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

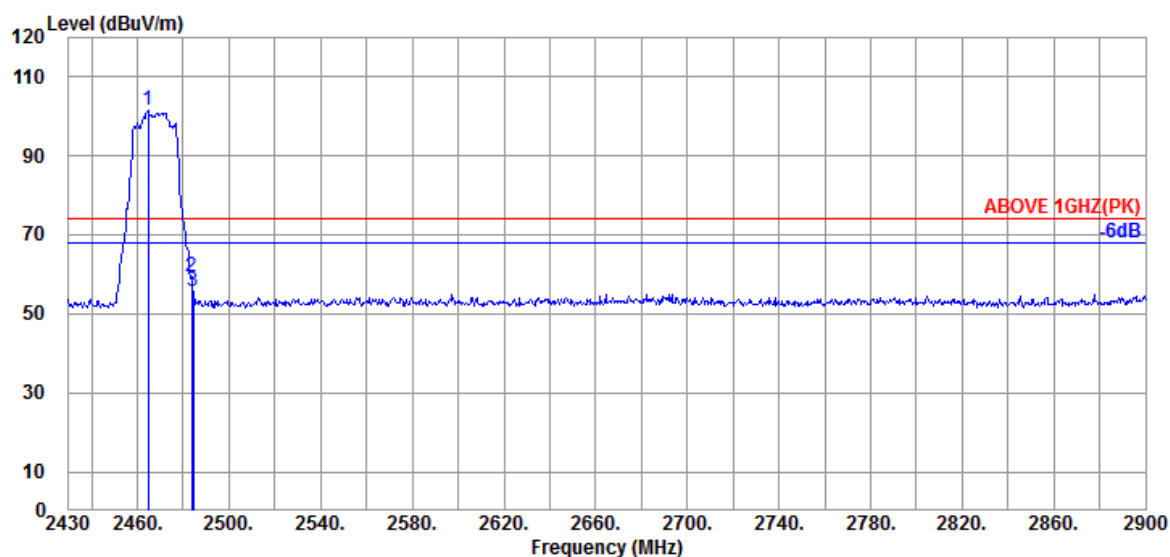

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2464.780                 | 28.59                 | 8.57            | 64.36                | 101.52                  | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 22.03                | 59.31                   | 74.00           | 14.69       | Peak     |
|   | 2484.520                 | 28.71                 | 8.58            | 18.33                | 55.62                   | 74.00           | 18.38       | Peak     |

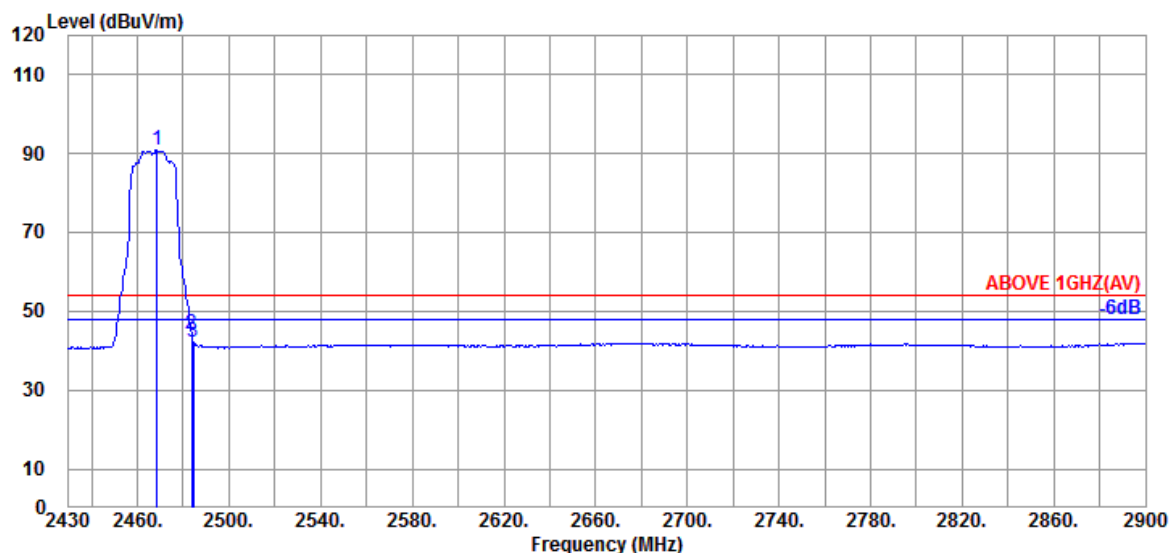

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2468.540                 | 28.61                 | 8.57            | 53.84                | 91.02                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 7.10                 | 44.38                   | 54.00           | 9.62        | Average  |
|   | 2484.520                 | 28.71                 | 8.58            | 4.90                 | 42.19                   | 54.00           | 11.81       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency | TX 2472MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

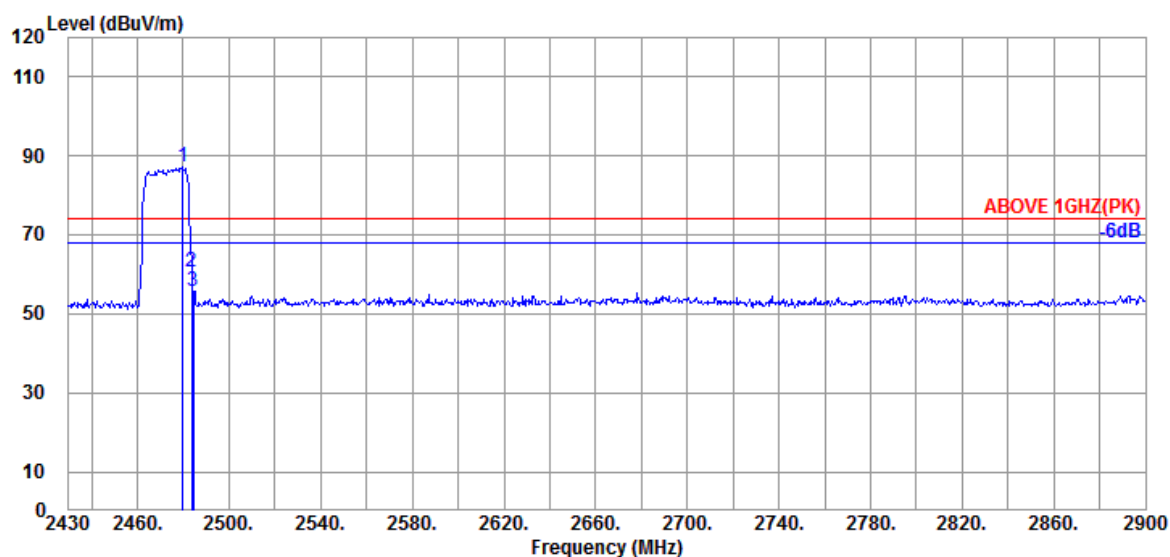

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2479.820                 | 28.68                 | 8.58            | 50.05                | 87.31                   | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 23.37                | 60.65                   | 74.00           | 13.35       | Peak     |
|   | 2484.520                 | 28.71                 | 8.58            | 18.37                | 55.66                   | 74.00           | 18.34       | Peak     |

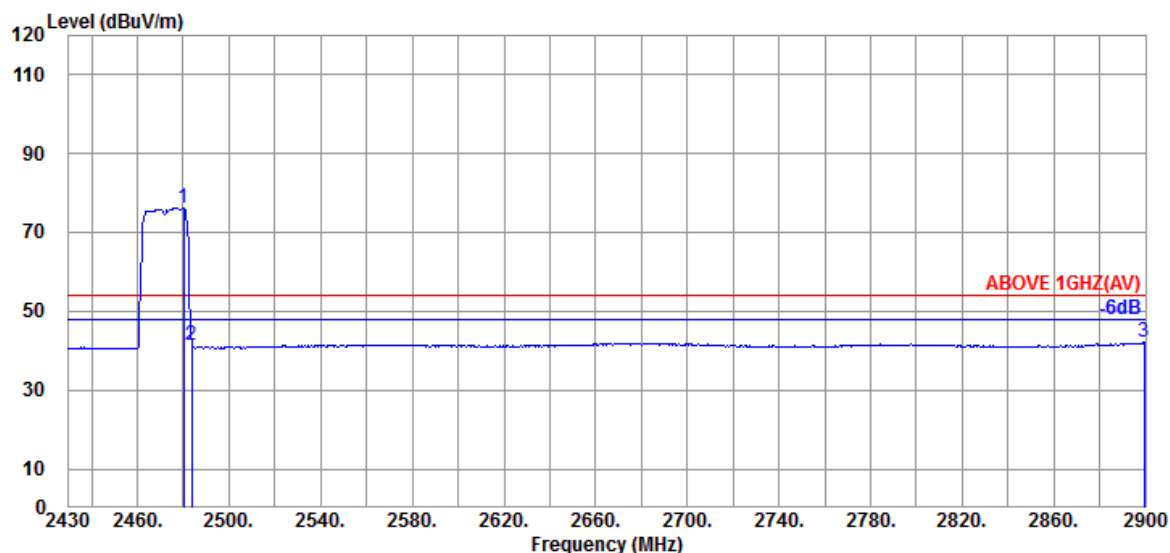

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.290                 | 28.68                 | 8.58            | 39.03                | 76.29                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 3.97                 | 41.25                   | 54.00           | 12.75       | Average  |
|   | 2899.530                 | 29.60                 | 8.69            | 3.73                 | 42.02                   | 54.00           | 11.98       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency | TX 2472MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

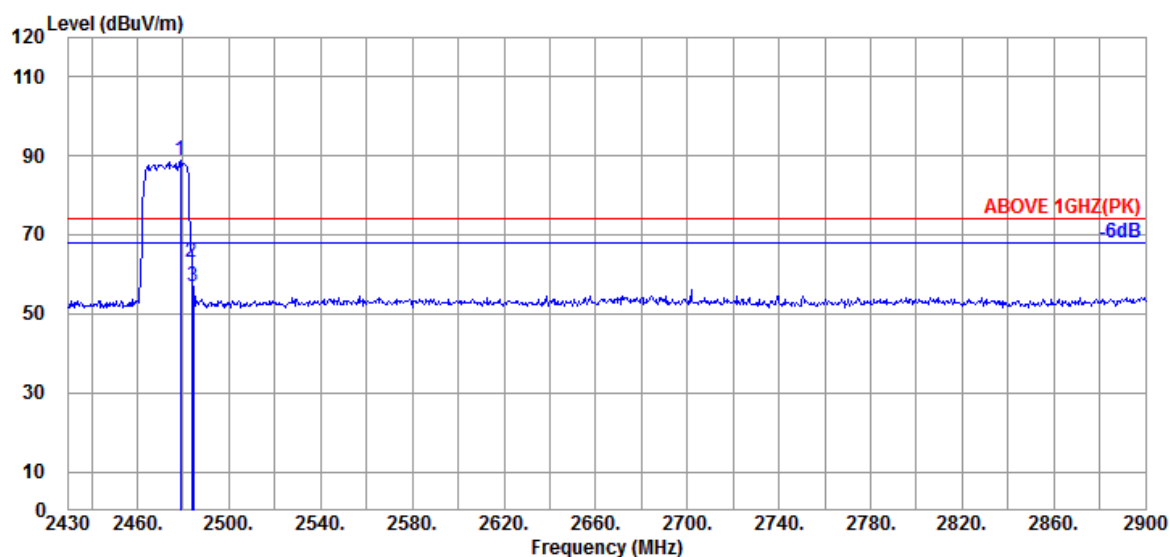

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2478.880                 | 28.67                 | 8.58            | 51.50                | 88.75                   | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 25.78                | 63.06                   | 74.00           | 10.94       | Peak     |
|   | 2484.520                 | 28.71                 | 8.58            | 19.48                | 56.77                   | 74.00           | 17.23       | Peak     |

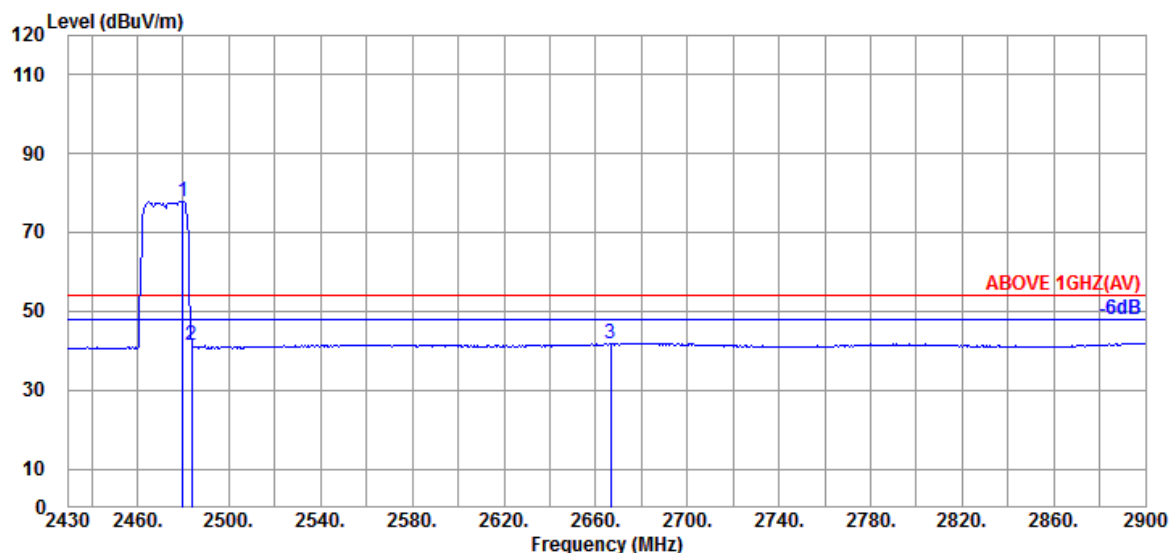

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2479.820                 | 28.68                 | 8.58            | 40.71                | 77.97                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 4.24                 | 41.52                   | 54.00           | 12.48       | Average  |
|   | 2666.410                 | 28.97                 | 8.63            | 4.31                 | 41.91                   | 54.00           | 12.09       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035

Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency | TX 2422MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

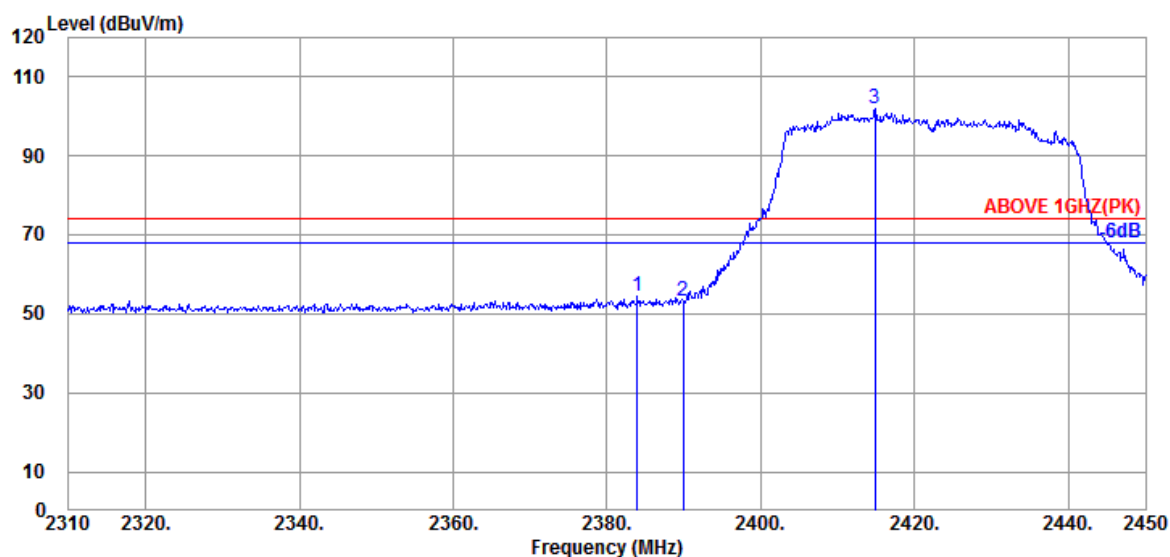

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2383.920                 | 28.27                 | 8.51            | 17.49                | 54.27                   | 74.00           | 19.73       | Peak     |
| 2389.940                 | 28.32                 | 8.52            | 16.46                | 53.30                   | 74.00           | 20.70       | Peak     |
| @ 2414.860               | 28.43                 | 8.53            | 65.00                | 101.96                  | ---             | ---         | Peak     |

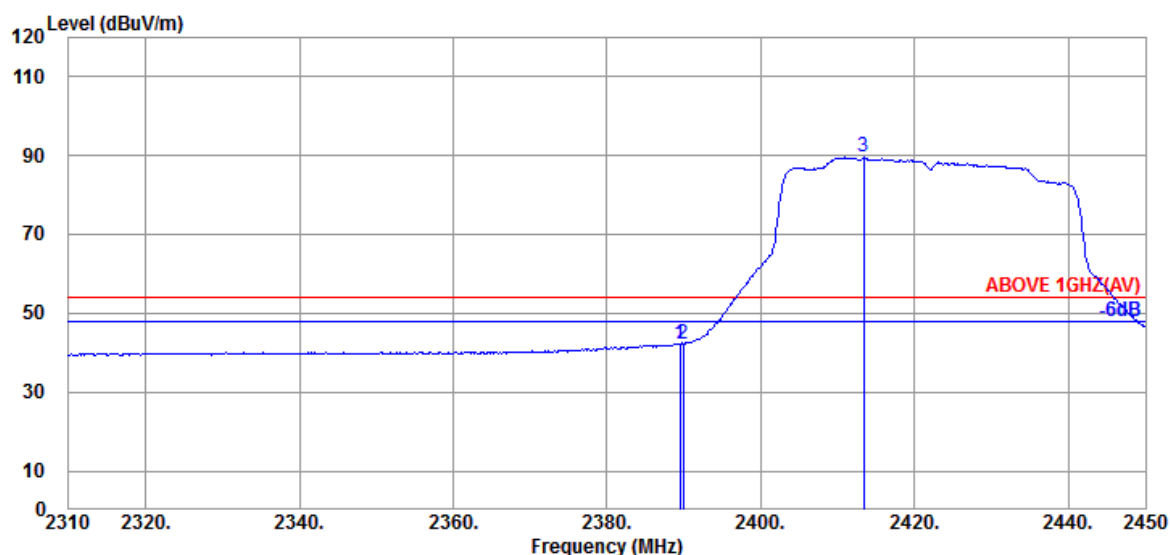

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.520                 | 28.32                 | 8.52            | 5.38                 | 42.22                   | 54.00           | 11.78       | Average  |
| 2389.940                 | 28.32                 | 8.52            | 5.55                 | 42.39                   | 54.00           | 11.61       | Average  |
| @ 2413.320               | 28.43                 | 8.53            | 52.57                | 89.53                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency | TX 2422MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

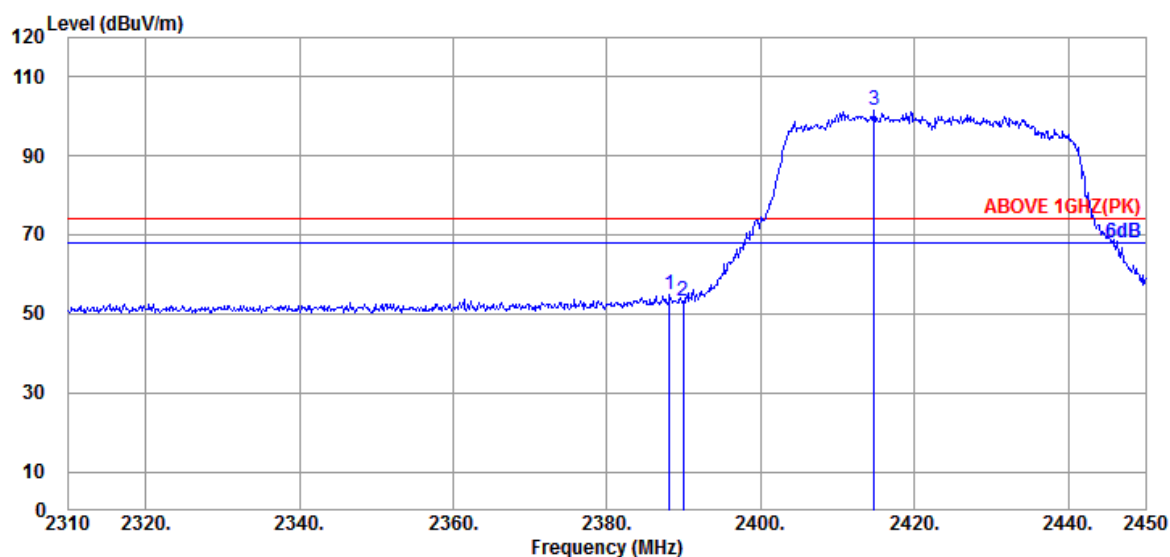

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2388.120                 | 28.30                 | 8.52            | 17.97                | 54.79                   | 74.00           | 19.21       | Peak     |
| 2389.940                 | 28.32                 | 8.52            | 16.49                | 53.33                   | 74.00           | 20.67       | Peak     |
| @ 2414.720               | 28.43                 | 8.53            | 64.47                | 101.43                  | ---             | ---         | Peak     |

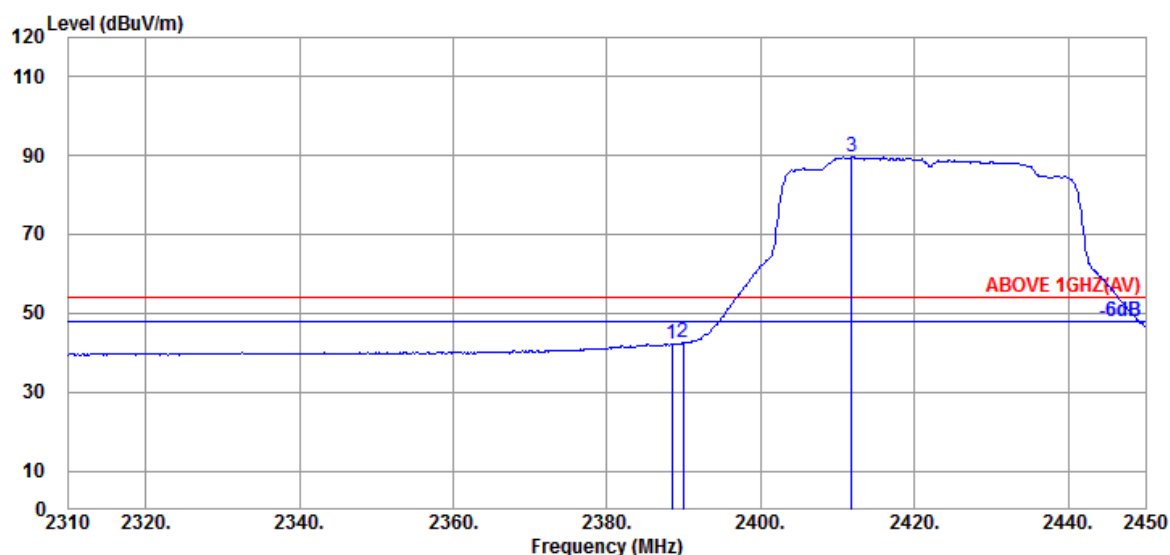

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2388.400                 | 28.31                 | 8.52            | 5.51                 | 42.34                   | 54.00           | 11.66       | Average  |
| 2389.940                 | 28.32                 | 8.52            | 5.63                 | 42.47                   | 54.00           | 11.53       | Average  |
| @ 2411.780               | 28.42                 | 8.53            | 52.65                | 89.60                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency | TX 2427MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

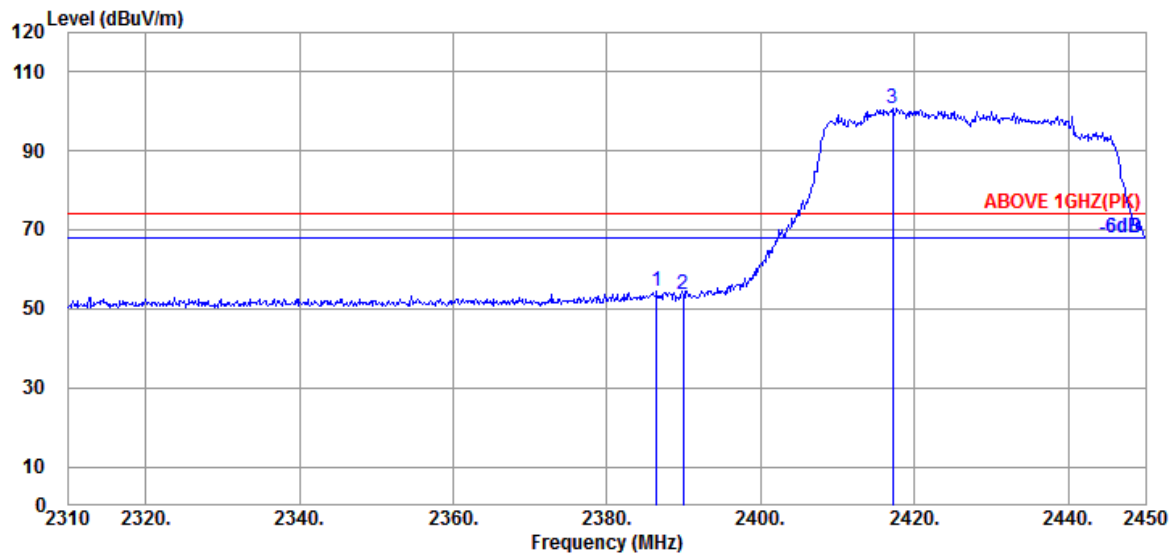

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2386.440                 | 28.29                 | 8.52            | 17.48                | 54.29                   | 74.00           | 19.71       | Peak     |
| 2389.940                 | 28.32                 | 8.52            | 16.90                | 53.74                   | 74.00           | 20.26       | Peak     |
| @ 2417.100               | 28.43                 | 8.53            | 63.98                | 100.94                  | ---             | ---         | Peak     |

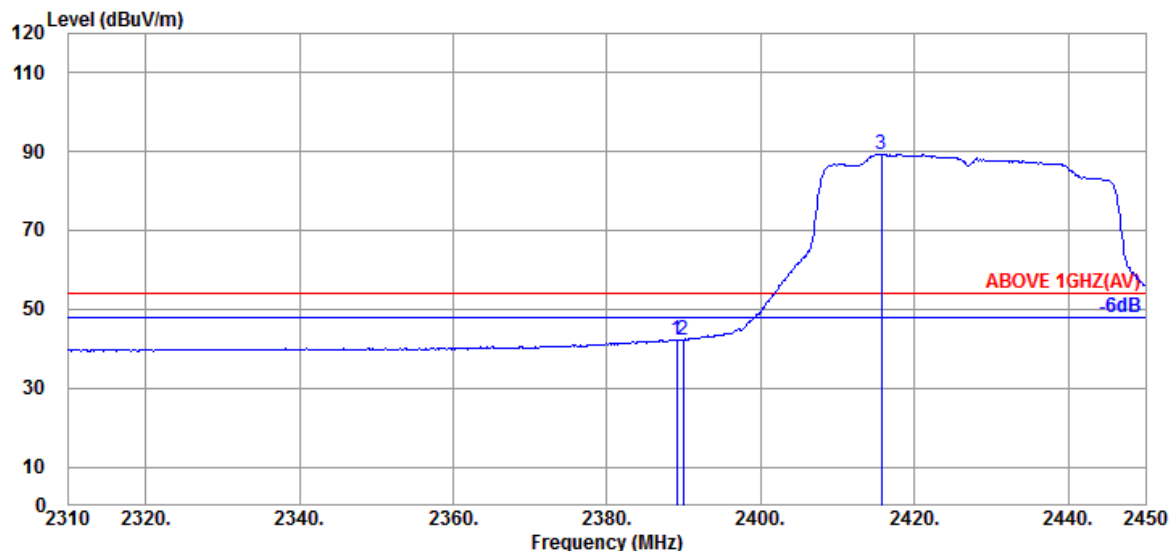

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.100                 | 28.31                 | 8.52            | 5.48                 | 42.31                   | 54.00           | 11.69       | Average  |
| 2389.940                 | 28.32                 | 8.52            | 5.50                 | 42.34                   | 54.00           | 11.66       | Average  |
| @ 2415.700               | 28.43                 | 8.53            | 52.47                | 89.43                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency | TX 2427MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

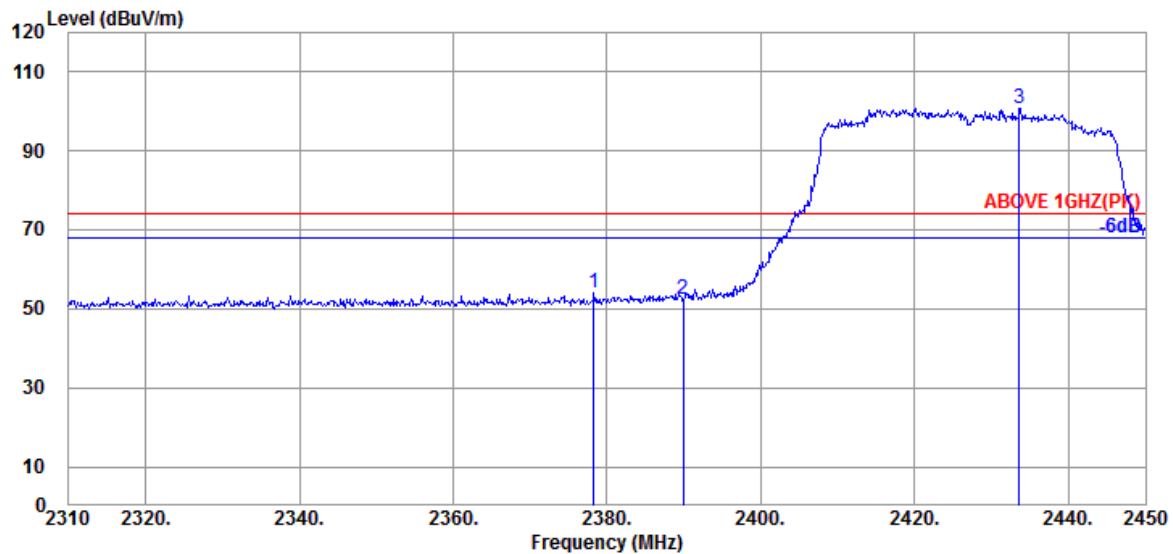

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2378.320                 | 28.23                 | 8.51            | 17.33                | 54.07                   | 74.00           | 19.93       | Peak     |
| 2389.940                 | 28.32                 | 8.52            | 15.76                | 52.60                   | 74.00           | 21.40       | Peak     |
| @ 2433.620               | 28.47                 | 8.54            | 63.80                | 100.81                  | ---             | ---         | Peak     |

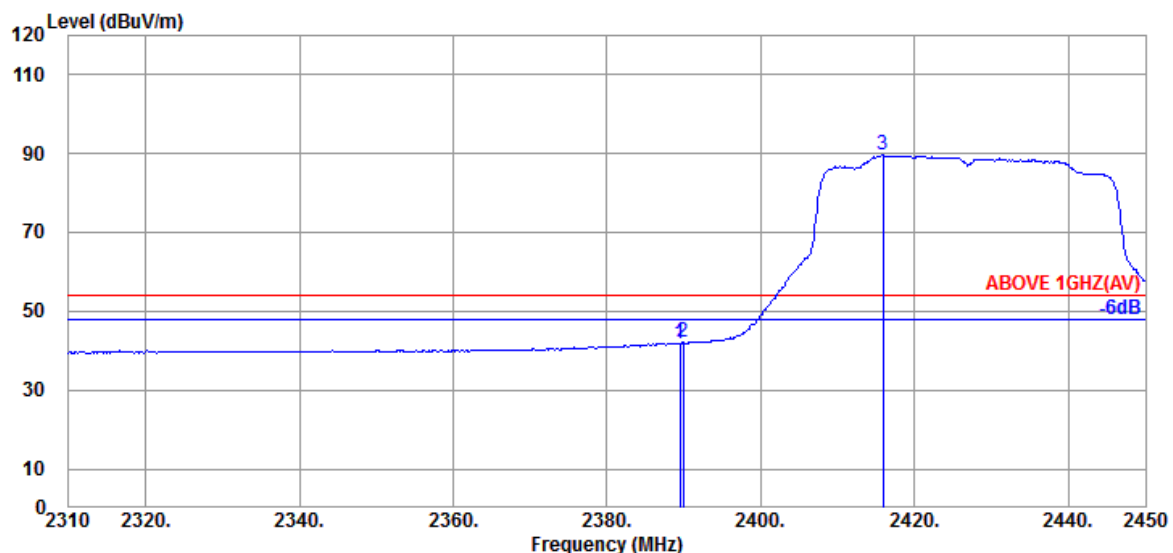

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.520                 | 28.32                 | 8.52            | 5.10                 | 41.94                   | 54.00           | 12.06       | Average  |
| 2389.940                 | 28.32                 | 8.52            | 5.24                 | 42.08                   | 54.00           | 11.92       | Average  |
| @ 2415.840               | 28.43                 | 8.53            | 52.72                | 89.68                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency | TX 2447MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

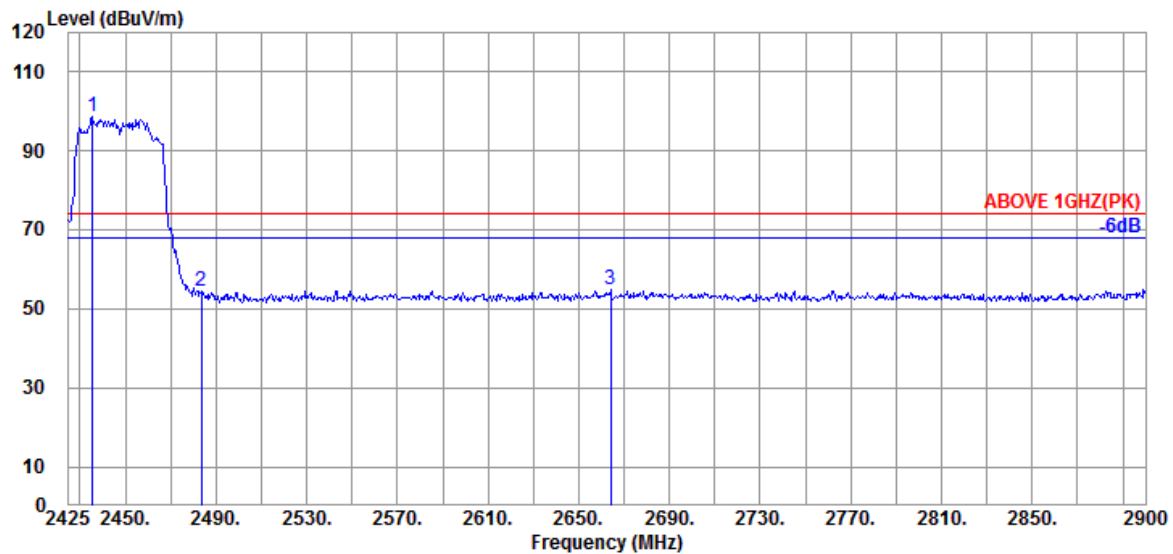

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2435.450                 | 28.47                 | 8.54            | 61.79                | 98.80                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 17.23                | 54.51                   | 74.00           | 19.49       | Peak     |
|   | 2663.925                 | 28.96                 | 8.63            | 17.22                | 54.81                   | 74.00           | 19.19       | Peak     |

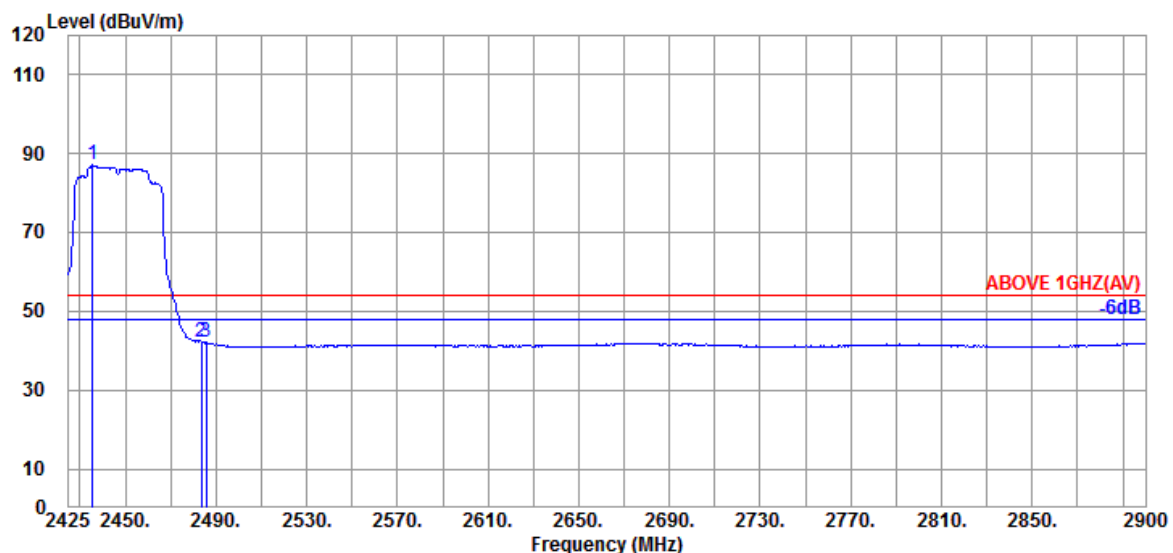

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2435.450                 | 28.47                 | 8.54            | 50.15                | 87.16                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 4.87                 | 42.15                   | 54.00           | 11.85       | Average  |
|   | 2485.800                 | 28.71                 | 8.58            | 5.04                 | 42.33                   | 54.00           | 11.67       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency | TX 2447MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

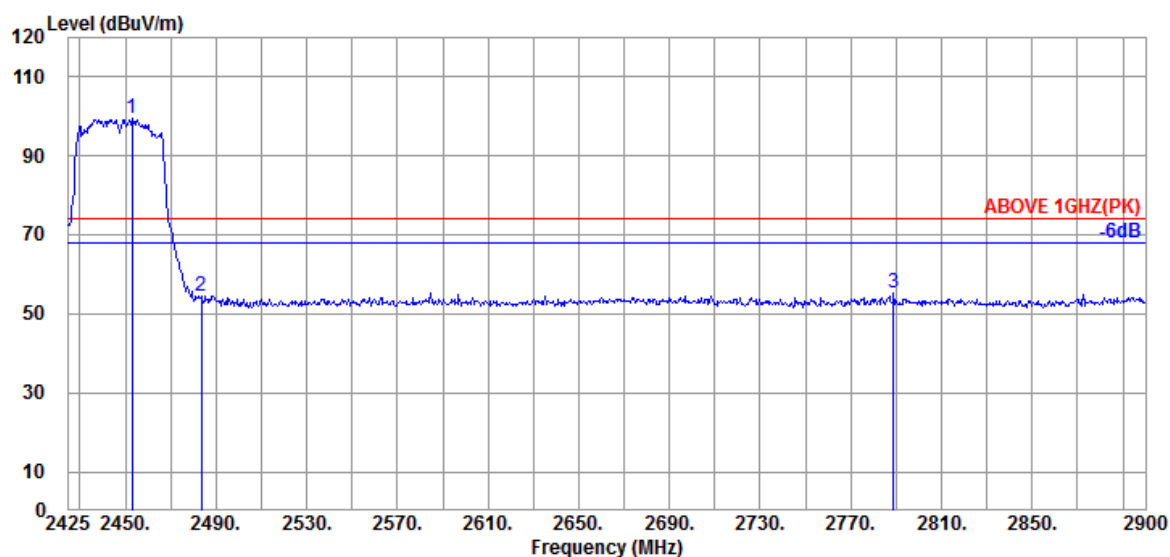

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2453.025                 | 28.52                 | 8.55            | 62.56                | 99.63                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 17.26                | 54.54                   | 74.00           | 19.46       | Peak     |
|   | 2788.850                 | 29.06                 | 8.66            | 17.45                | 55.17                   | 74.00           | 18.83       | Peak     |

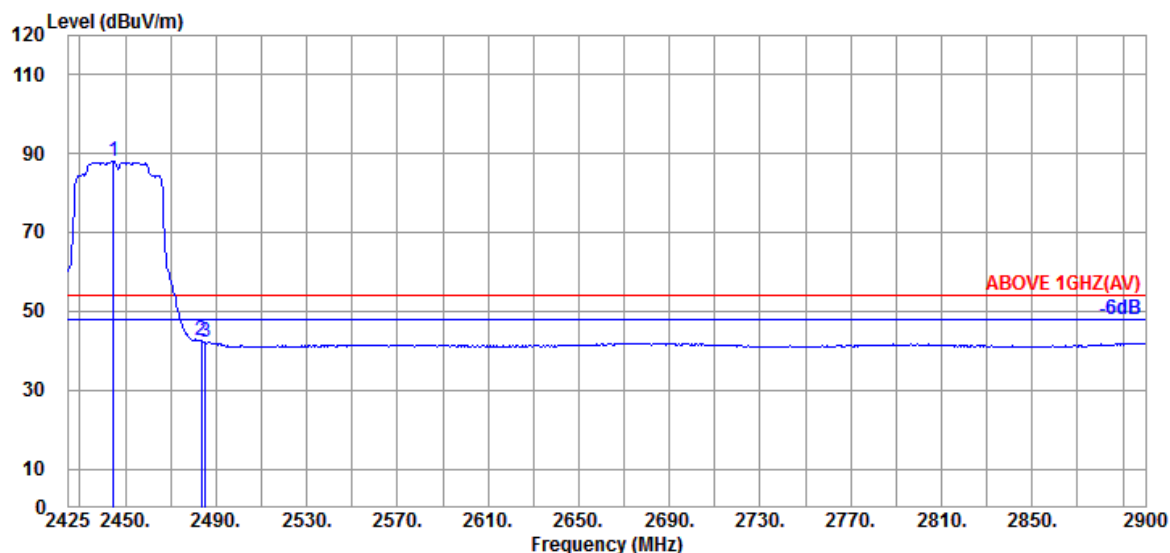

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2444.950                 | 28.49                 | 8.55            | 51.01                | 88.05                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 5.17                 | 42.45                   | 54.00           | 11.55       | Average  |
|   | 2485.325                 | 28.71                 | 8.58            | 4.82                 | 42.11                   | 54.00           | 11.89       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency | TX 2452MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

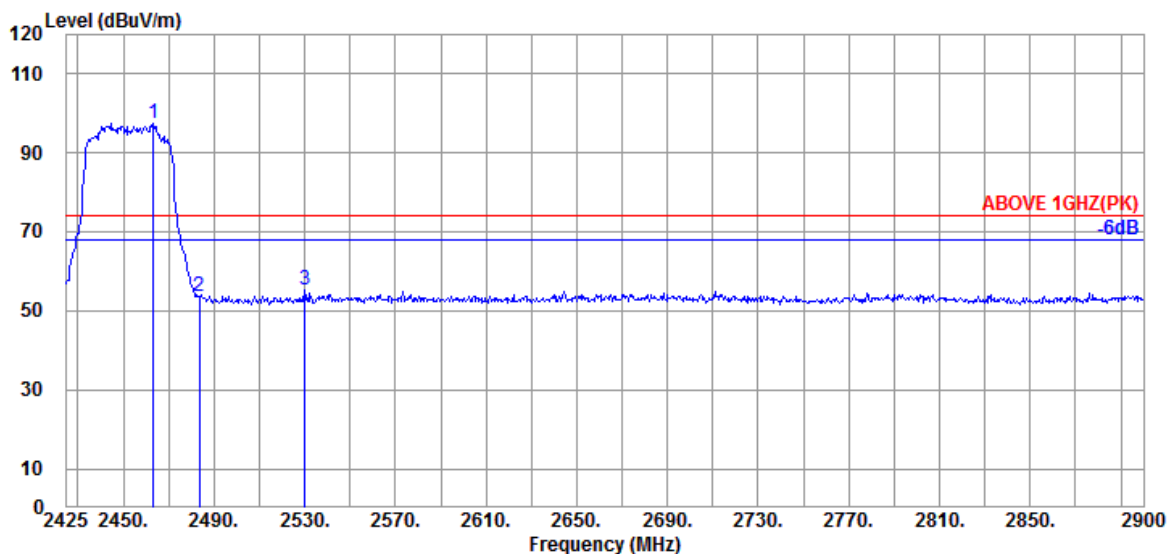

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2463.475                 | 28.58                 | 8.57            | 60.28                | 97.43                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 16.19                | 53.47                   | 74.00           | 20.53       | Peak     |
|   | 2529.975                 | 28.86                 | 8.60            | 17.76                | 55.22                   | 74.00           | 18.78       | Peak     |

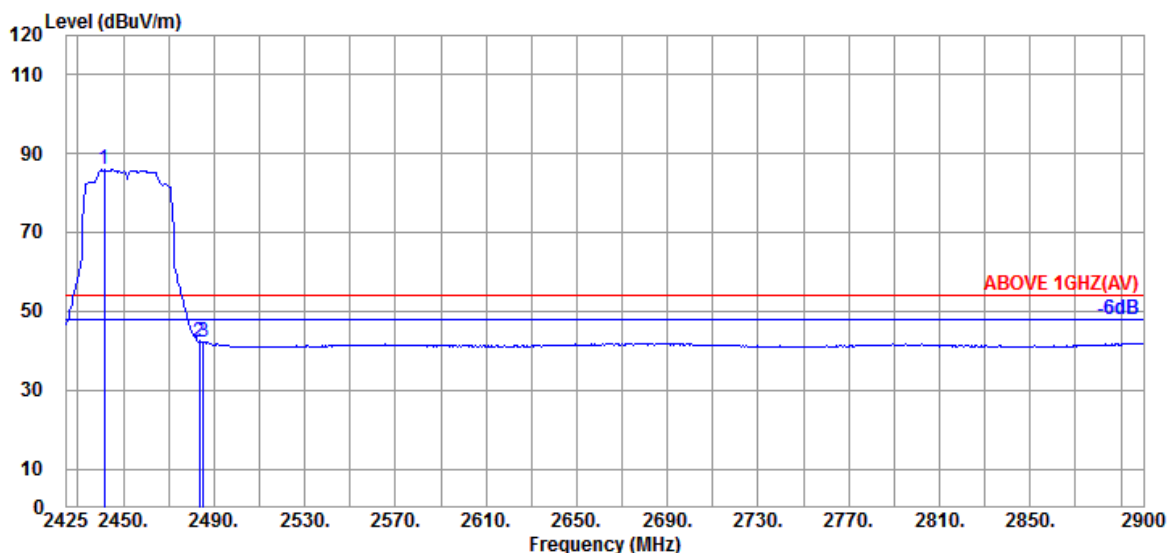

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2441.625                 | 28.48                 | 8.55            | 48.98                | 86.01                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 4.93                 | 42.21                   | 54.00           | 11.79       | Average  |
|   | 2485.325                 | 28.71                 | 8.58            | 4.82                 | 42.11                   | 54.00           | 11.89       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency | TX 2452MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

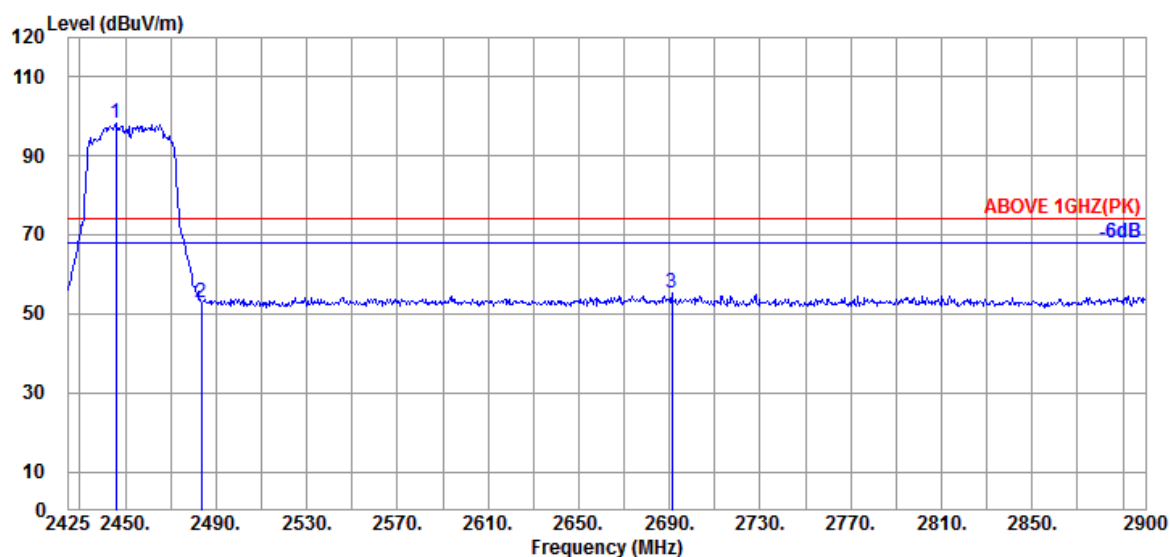

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2445.900                 | 28.49                 | 8.55            | 61.14                | 98.18                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 15.57                | 52.85                   | 74.00           | 21.15       | Peak     |
|   | 2691.000                 | 29.06                 | 8.63            | 17.61                | 55.30                   | 74.00           | 18.70       | Peak     |

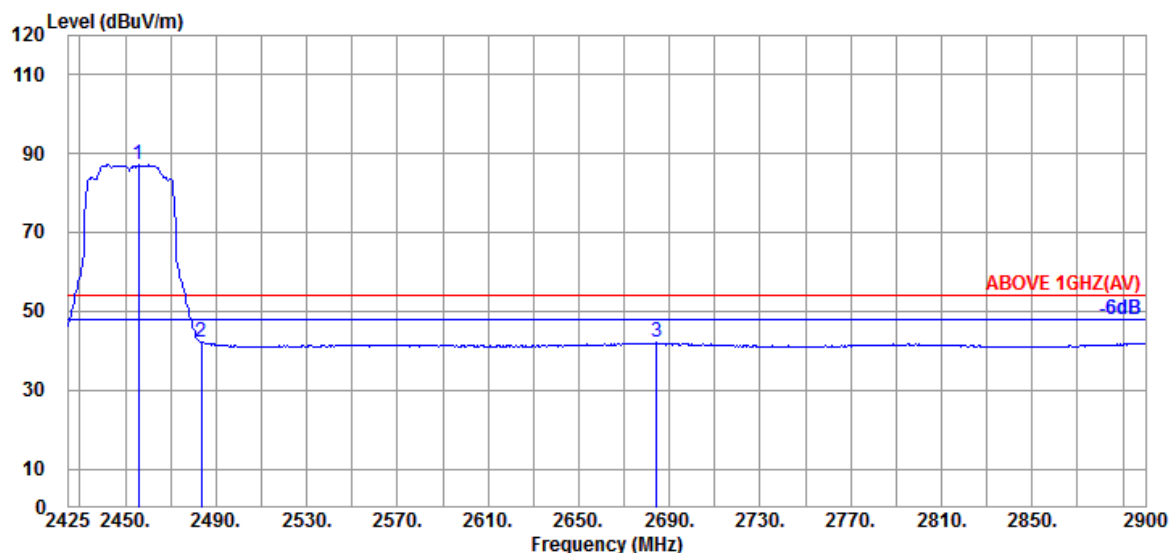

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2455.875                 | 28.54                 | 8.57            | 50.14                | 87.25                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 4.95                 | 42.23                   | 54.00           | 11.77       | Average  |
|   | 2684.350                 | 29.04                 | 8.63            | 4.32                 | 41.99                   | 54.00           | 12.01       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency | TX 2457MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

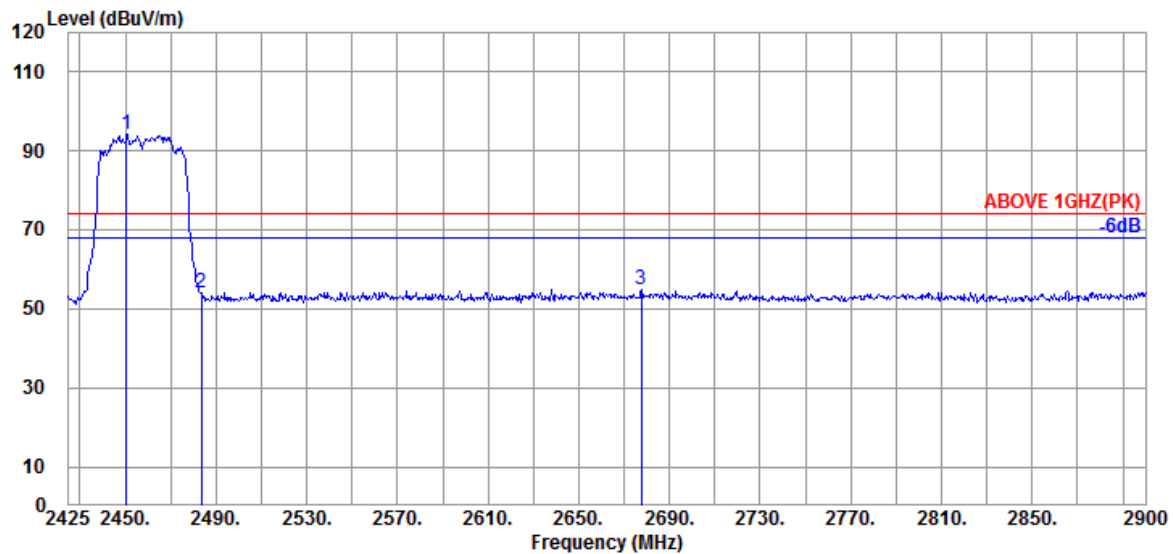

Antenna at Horizontal Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 2450.650                       | 28.50                       | 8.55                  | 57.14                      | 94.19                         | ---                | ---            | Peak     |
|   | 2483.425                       | 28.70                       | 8.58                  | 16.70                      | 53.98                         | 74.00              | 20.02          | Peak     |
|   | 2677.700                       | 29.01                       | 8.63                  | 17.39                      | 55.03                         | 74.00              | 18.97          | Peak     |

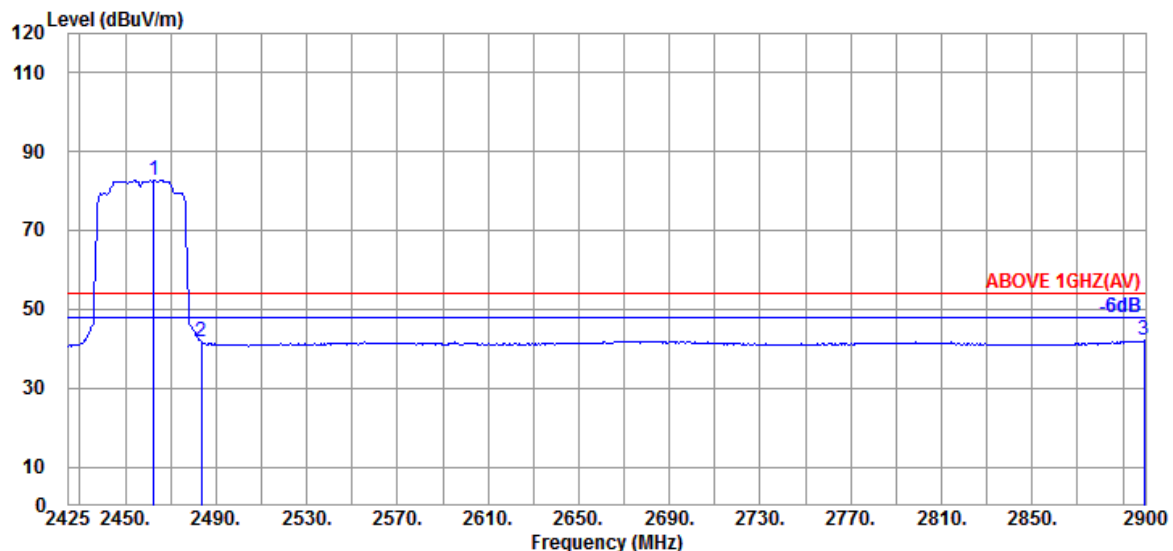

Antenna at Horizontal Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| @ | 2462.525                       | 28.58                       | 8.57                  | 45.59                      | 82.74                         | ---                | ---            | Average  |
|   | 2483.425                       | 28.70                       | 8.58                  | 4.56                       | 41.84                         | 54.00              | 12.16          | Average  |
|   | 2899.525                       | 29.60                       | 8.69                  | 3.78                       | 42.07                         | 54.00              | 11.93          | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency | TX 2457MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

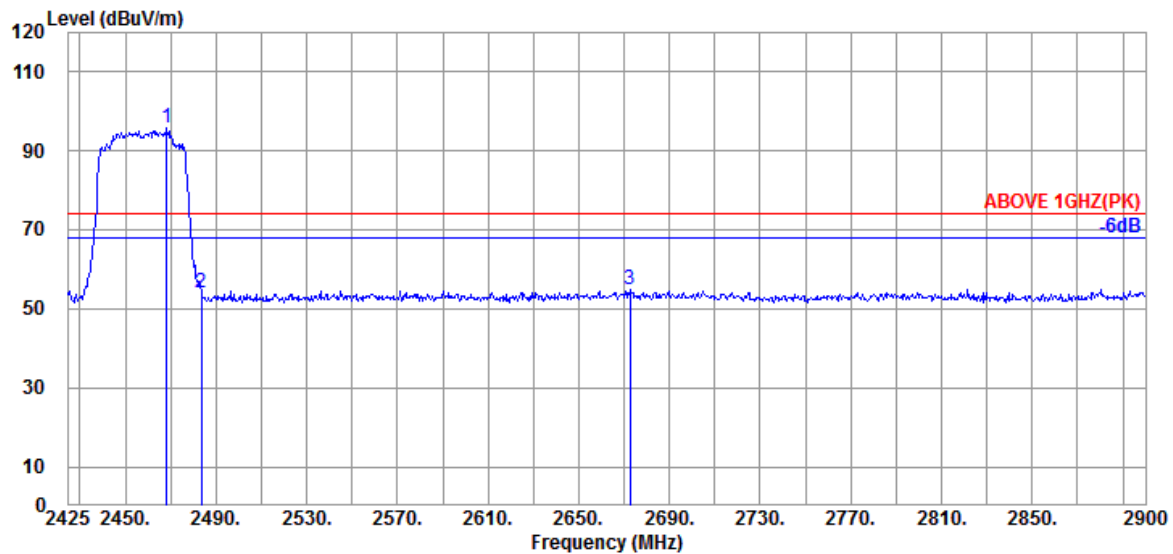

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2468.225                 | 28.61                 | 8.57            | 58.57                | 95.75                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 16.75                | 54.03                   | 74.00           | 19.97       | Peak     |
|   | 2672.475                 | 28.99                 | 8.63            | 17.36                | 54.98                   | 74.00           | 19.02       | Peak     |

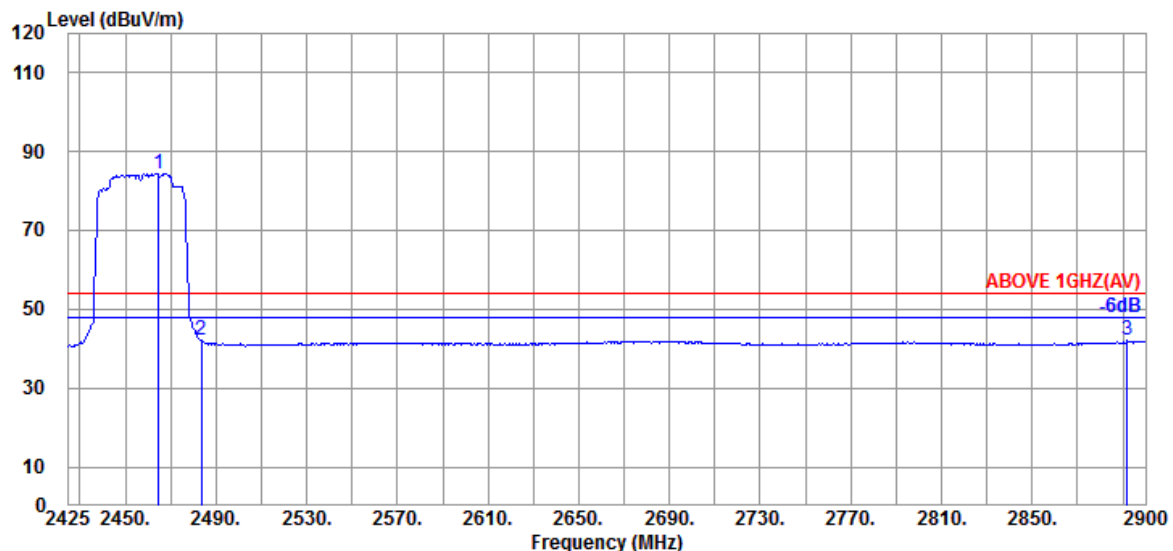

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2464.900                 | 28.59                 | 8.57            | 47.25                | 84.41                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 4.86                 | 42.14                   | 54.00           | 11.86       | Average  |
|   | 2891.925                 | 29.52                 | 8.68            | 3.82                 | 42.02                   | 54.00           | 11.98       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035

Report Number: EM-F200116


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

| Mode | 802.11ax-HE40 | Frequency | TX 2462MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

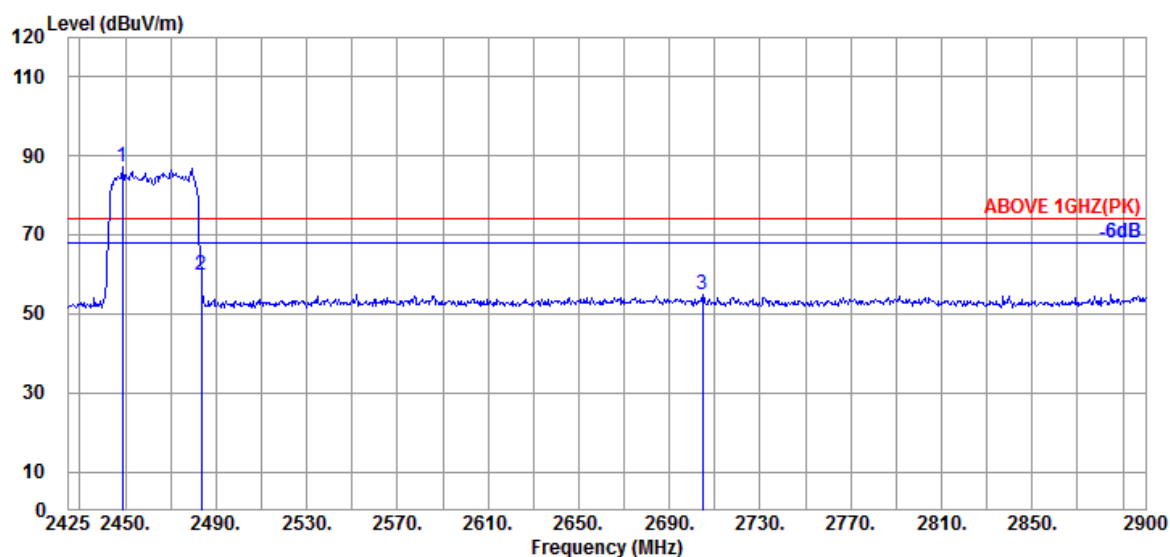

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2448.750                 | 28.50                 | 8.55            | 50.08                | 87.13                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 22.66                | 59.94                   | 74.00           | 14.06       | Peak     |
|   | 2704.775                 | 29.08                 | 8.64            | 17.25                | 54.97                   | 74.00           | 19.03       | Peak     |

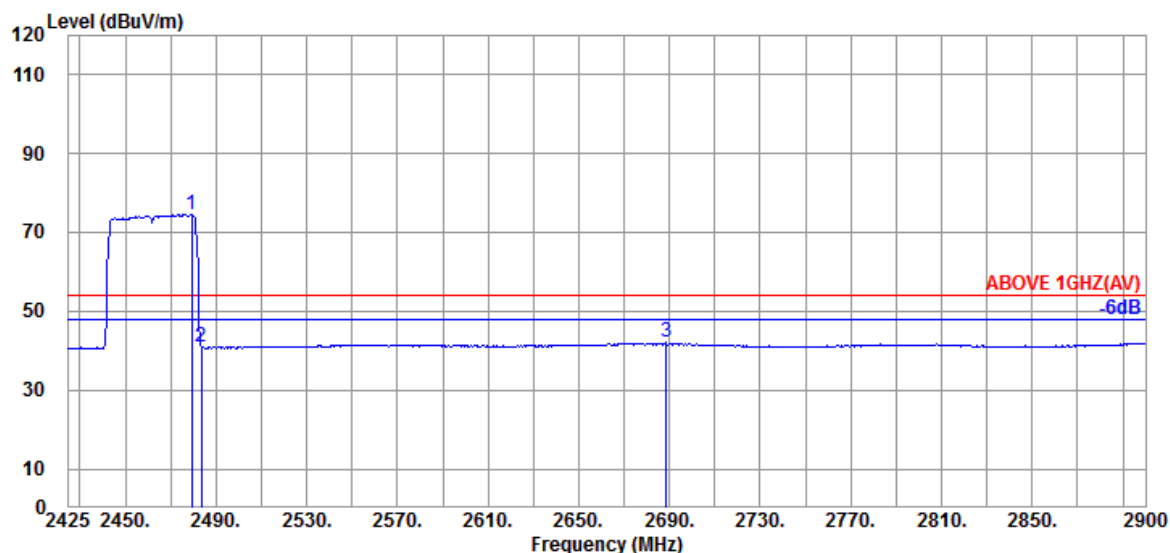

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2479.150                 | 28.67                 | 8.58            | 37.35                | 74.60                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 3.80                 | 41.08                   | 54.00           | 12.92       | Average  |
|   | 2688.625                 | 29.05                 | 8.63            | 4.34                 | 42.02                   | 54.00           | 11.98       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency | TX 2462MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

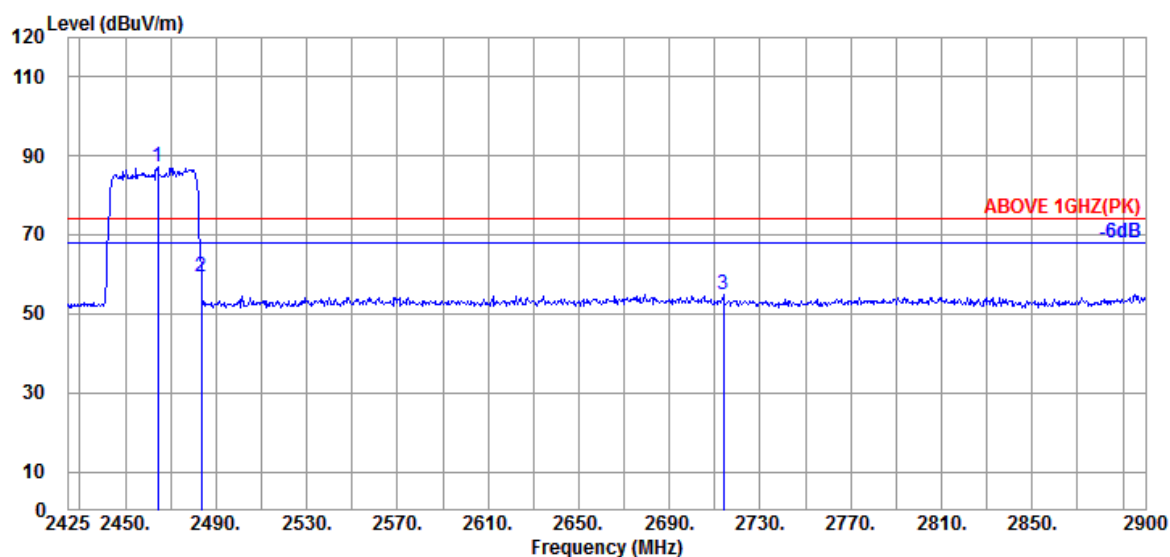

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2464.425                 | 28.59                 | 8.57            | 49.98                | 87.14                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 21.90                | 59.18                   | 74.00           | 14.82       | Peak     |
|   | 2713.800                 | 29.04                 | 8.64            | 17.37                | 55.05                   | 74.00           | 18.95       | Peak     |

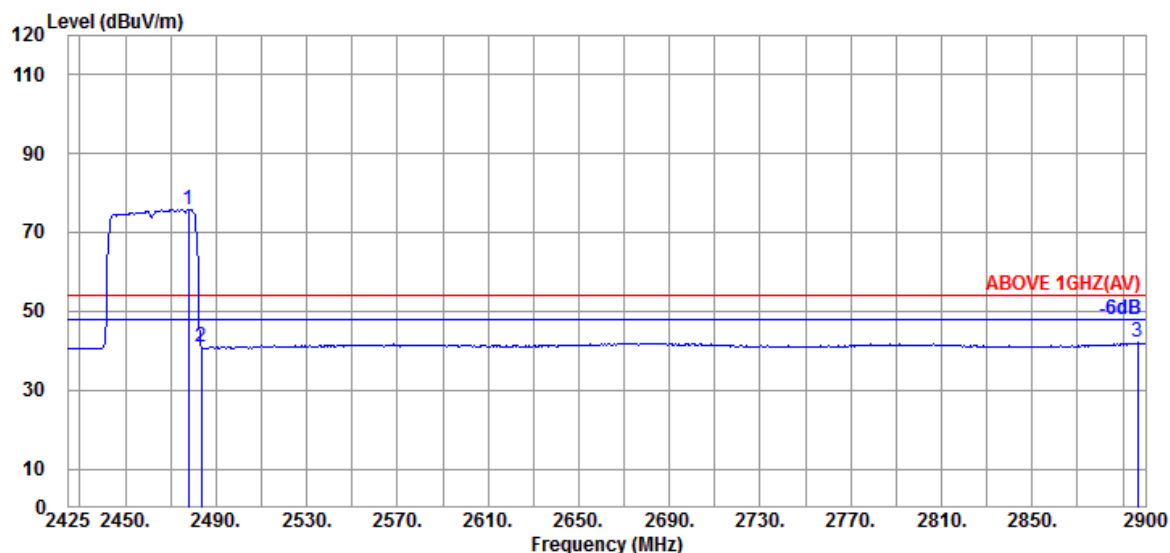

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2477.725                 | 28.67                 | 8.58            | 38.64                | 75.89                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 3.65                 | 40.93                   | 54.00           | 13.07       | Average  |
|   | 2896.675                 | 29.57                 | 8.69            | 3.74                 | 42.00                   | 54.00           | 12.00       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035


Report Number: EM-F200116

**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2412MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 26/0       |

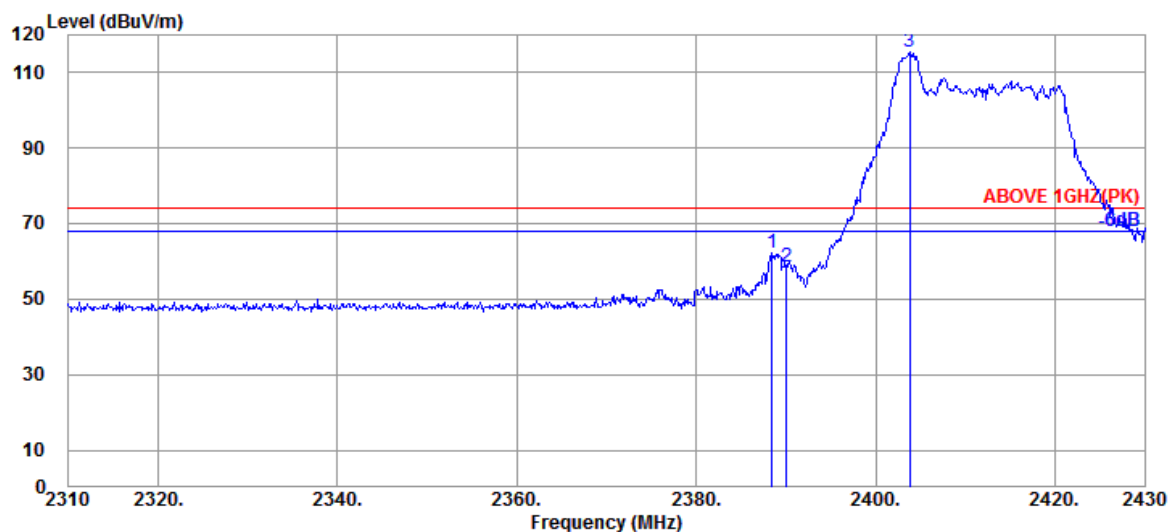

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2388.480                 | 28.31                 | 8.52            | 25.23                | 62.06                   | 74.00           | 11.94       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 21.92                | 58.76                   | 74.00           | 15.24       | Peak     |
| @ 2403.840               | 28.41                 | 8.53            | 78.41                | 115.35                  | ---             | ---         | Peak     |

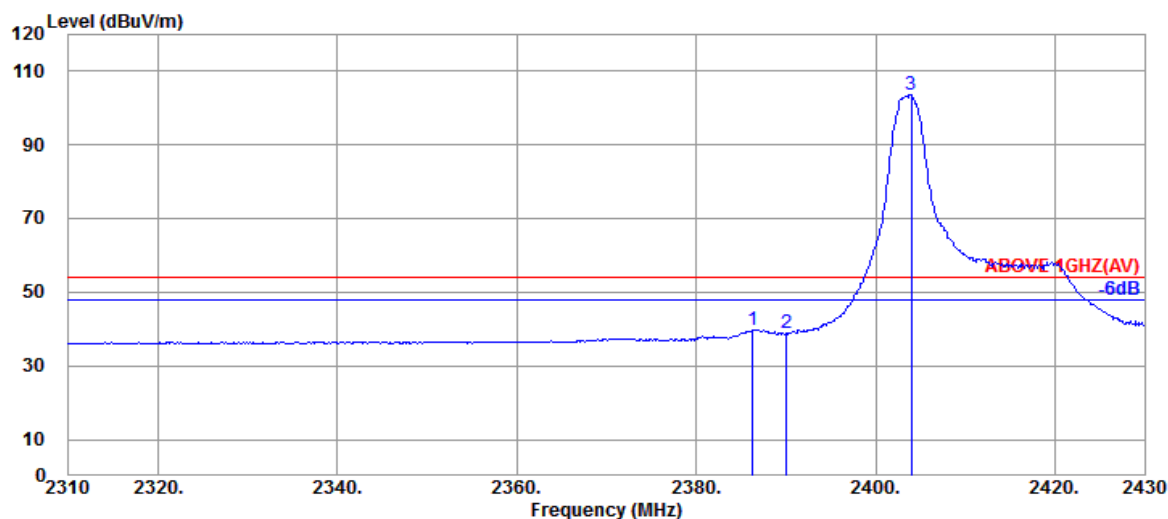

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2386.320                 | 28.29                 | 8.52            | 3.00                 | 39.81                   | 54.00           | 14.19       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 1.87                 | 38.71                   | 54.00           | 15.29       | Average  |
| @ 2403.960               | 28.41                 | 8.53            | 66.83                | 103.77                  | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2412MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 26/0       |

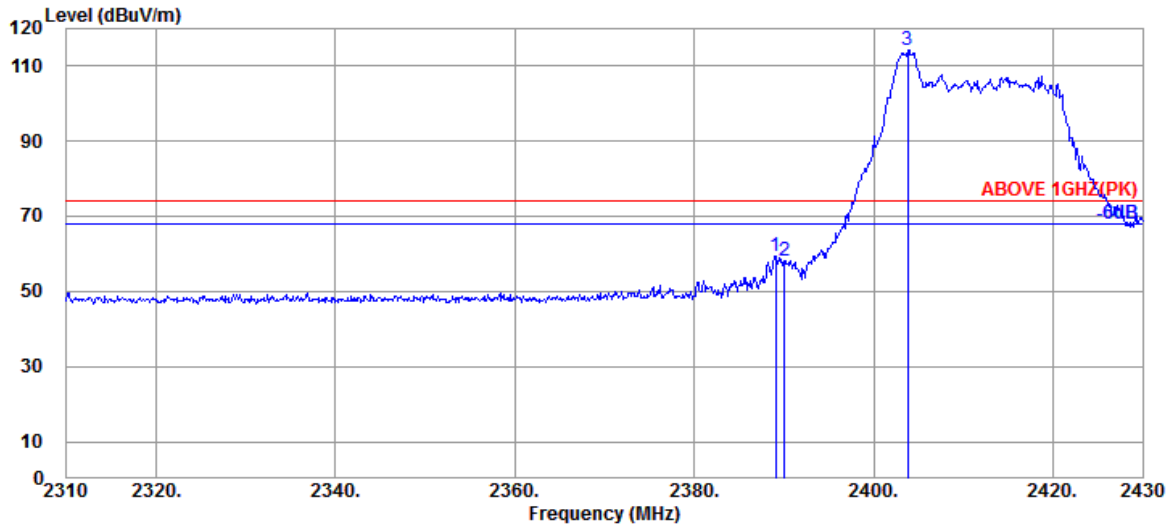

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.080                 | 28.31                 | 8.52            | 22.50                | 59.33                   | 74.00           | 14.67       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 21.42                | 58.26                   | 74.00           | 15.74       | Peak     |
| @ 2403.840               | 28.41                 | 8.53            | 77.49                | 114.43                  | ---             | ---         | Peak     |

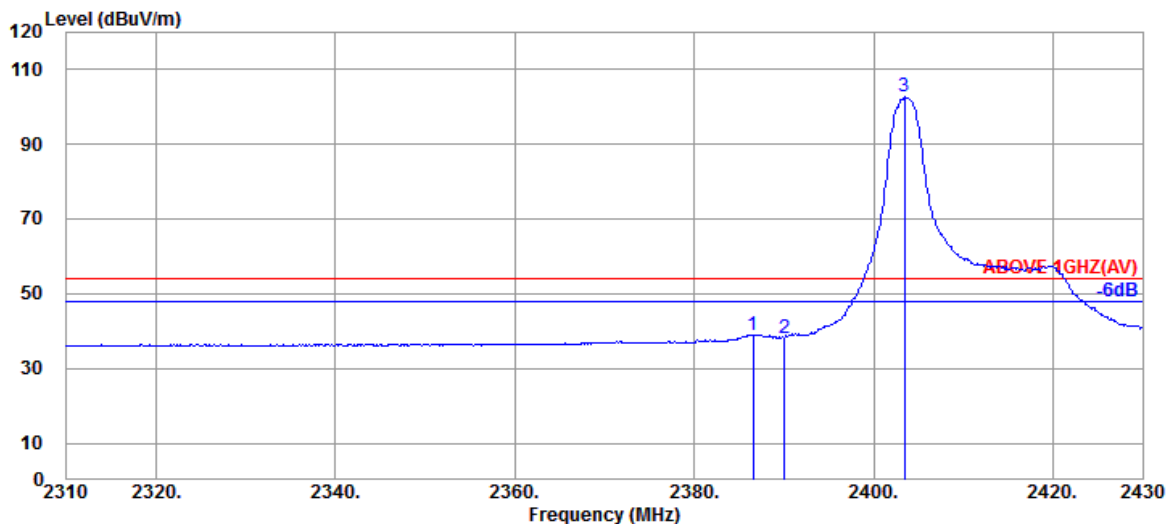

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2386.560                 | 28.29                 | 8.52            | 2.25                 | 39.06                   | 54.00           | 14.94       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 1.40                 | 38.24                   | 54.00           | 15.76       | Average  |
| @ 2403.480               | 28.41                 | 8.53            | 65.66                | 102.60                  | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2412MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 52/37      |

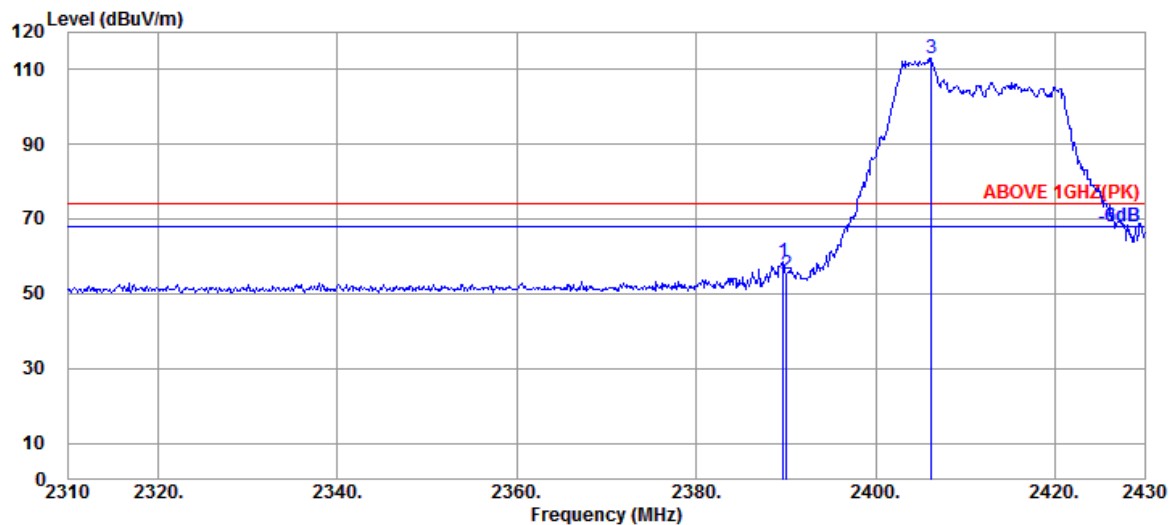

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.680                 | 28.32                 | 8.52            | 21.87                | 58.71                   | 74.00           | 15.29       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 18.37                | 55.21                   | 74.00           | 18.79       | Peak     |
| @ 2406.240               | 28.41                 | 8.53            | 76.06                | 113.00                  | ---             | ---         | Peak     |

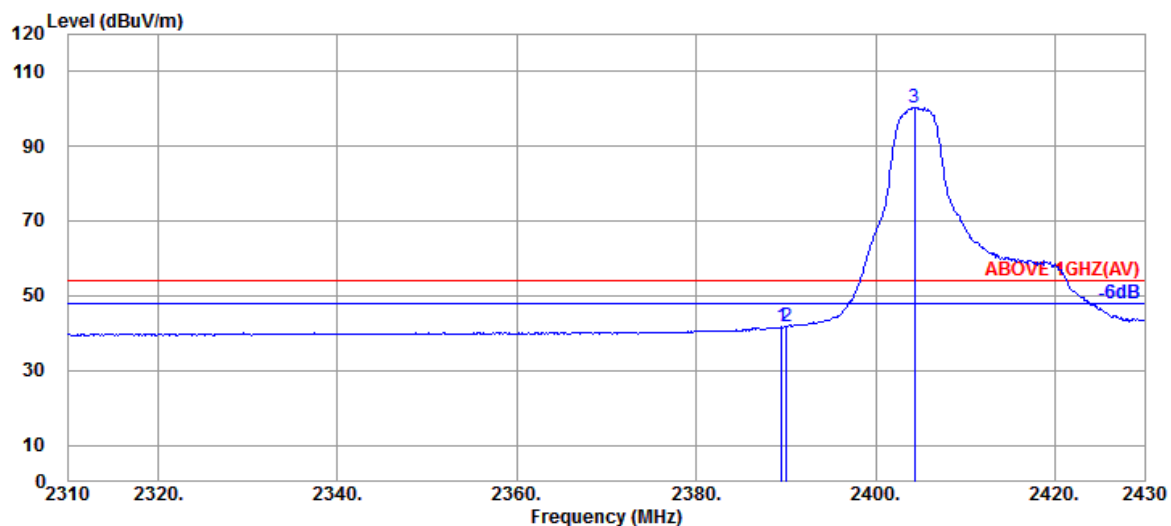

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.560                 | 28.32                 | 8.52            | 4.92                 | 41.76                   | 54.00           | 12.24       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 4.99                 | 41.83                   | 54.00           | 12.17       | Average  |
| @ 2404.320               | 28.41                 | 8.53            | 63.50                | 100.44                  | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2412MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 52/37      |

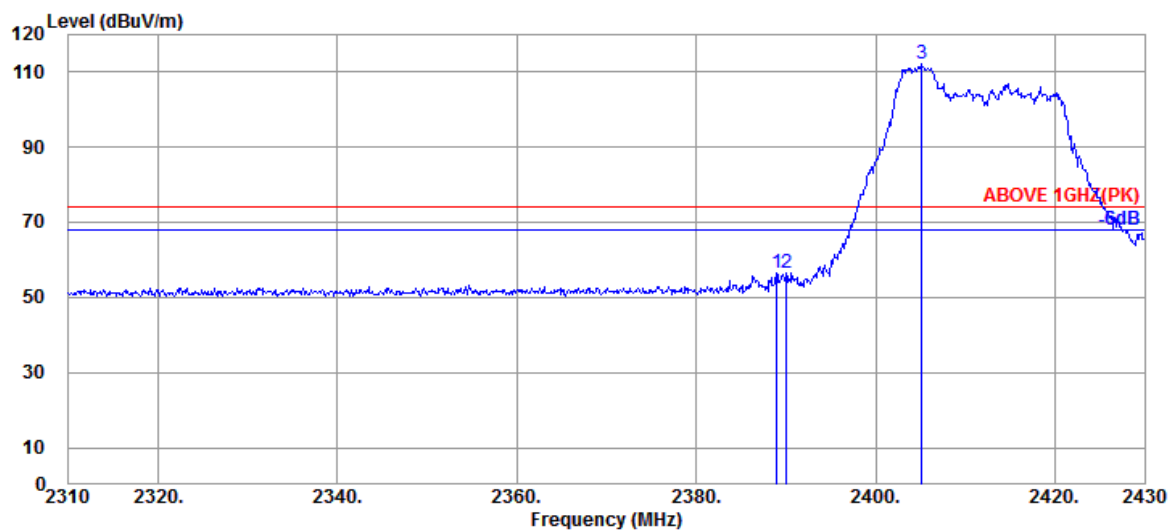

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2388.960                 | 28.31                 | 8.52            | 19.70                | 56.53                   | 74.00           | 17.47       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 19.62                | 56.46                   | 74.00           | 17.54       | Peak     |
| @ 2405.160               | 28.41                 | 8.53            | 75.23                | 112.17                  | ---             | ---         | Peak     |

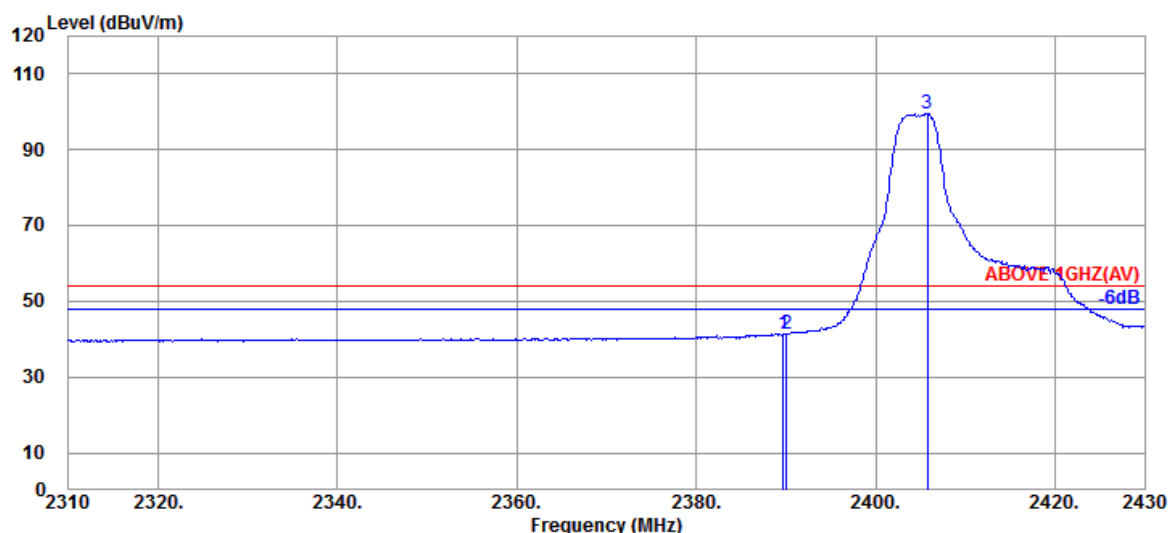

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.680                 | 28.32                 | 8.52            | 4.55                 | 41.39                   | 54.00           | 12.61       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 4.61                 | 41.45                   | 54.00           | 12.55       | Average  |
| @ 2405.760               | 28.41                 | 8.53            | 62.67                | 99.61                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency        | TX 2412MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 106/53     |

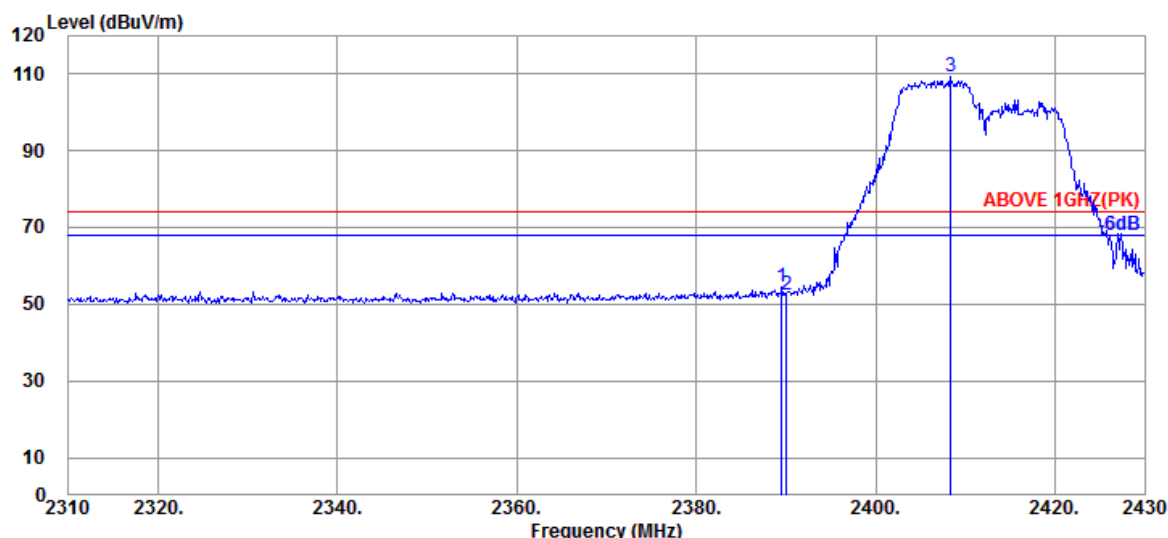

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.560                 | 28.32                 | 8.52            | 17.64                | 54.48                   | 74.00           | 19.52       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 15.62                | 52.46                   | 74.00           | 21.54       | Peak     |
| @ 2408.400               | 28.42                 | 8.53            | 72.29                | 109.24                  | ---             | ---         | Peak     |

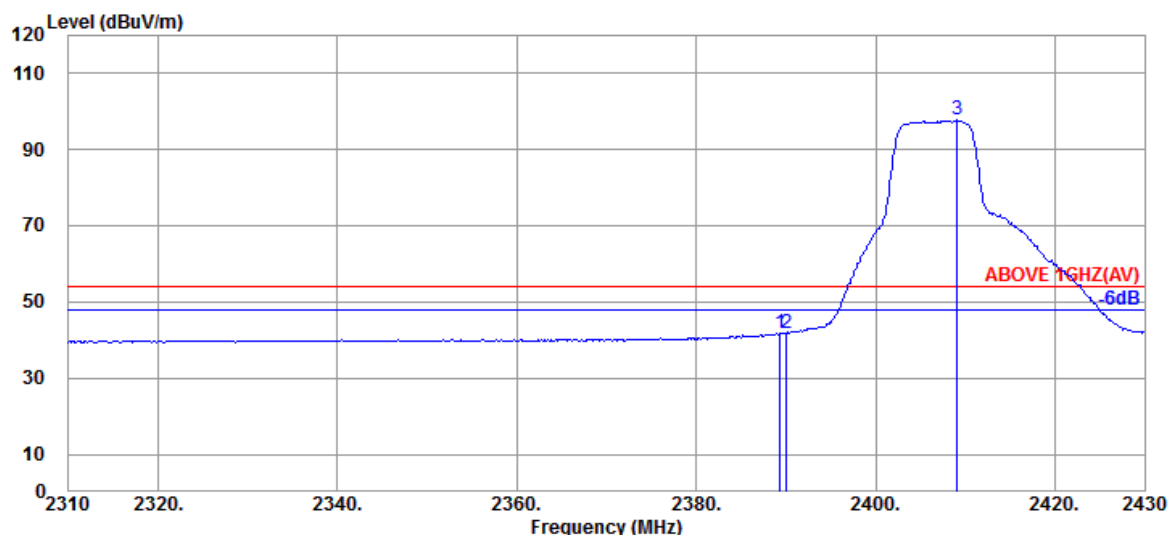

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.320                 | 28.31                 | 8.52            | 4.86                 | 41.69                   | 54.00           | 12.31       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 5.05                 | 41.89                   | 54.00           | 12.11       | Average  |
| @ 2409.120               | 28.42                 | 8.53            | 60.82                | 97.77                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2412MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 106/53     |

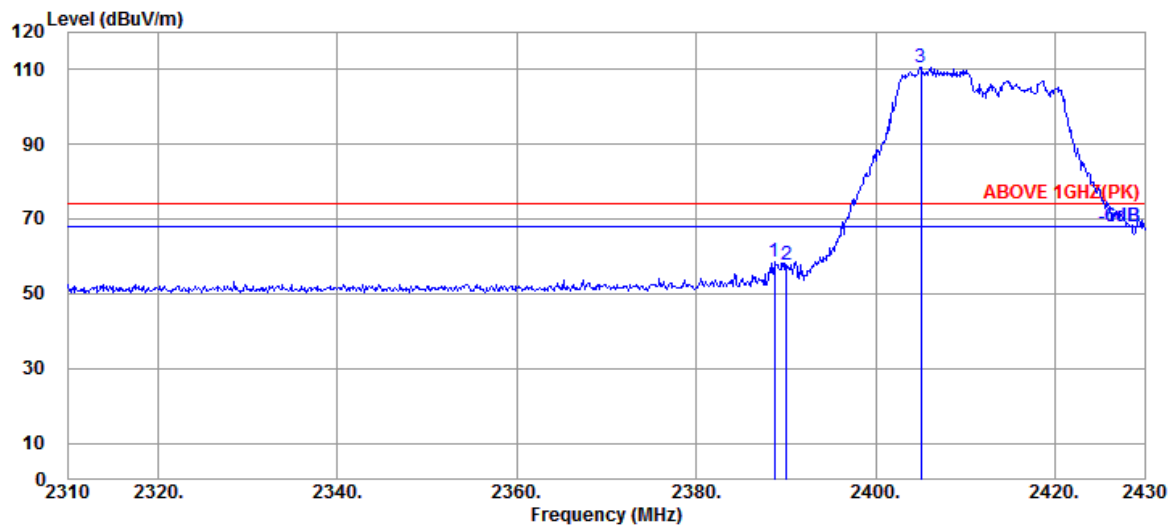

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2388.720                 | 28.31                 | 8.52            | 21.63                | 58.46                   | 74.00           | 15.54       | Peak     |
| 2390.040                 | 28.32                 | 8.52            | 21.07                | 57.91                   | 74.00           | 16.09       | Peak     |
| @ 2405.040               | 28.41                 | 8.53            | 73.51                | 110.45                  | ---             | ---         | Peak     |

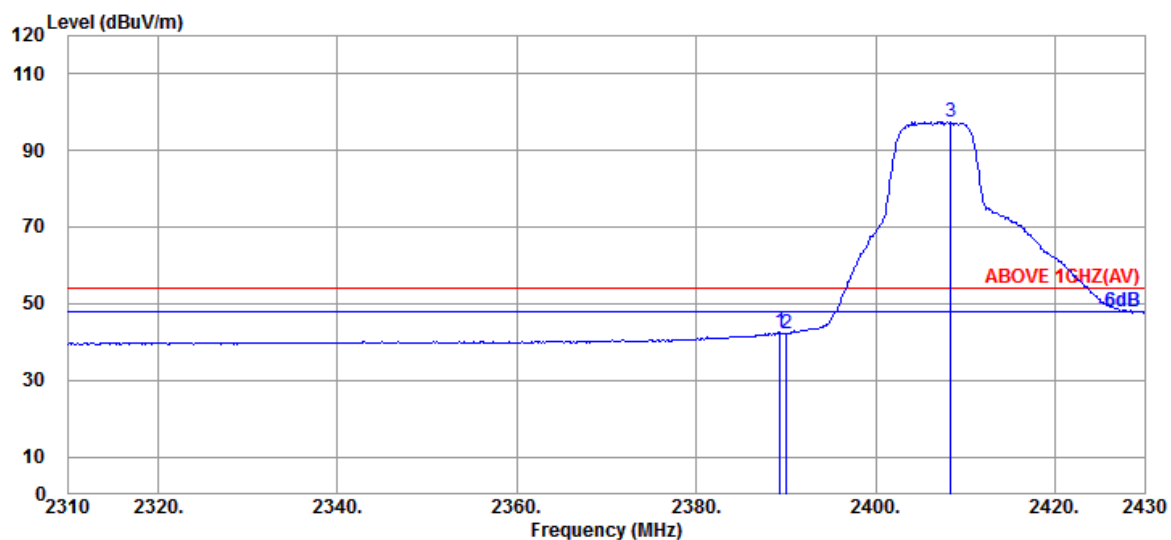

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.320                 | 28.31                 | 8.52            | 5.59                 | 42.42                   | 54.00           | 11.58       | Average  |
| 2390.040                 | 28.32                 | 8.52            | 5.39                 | 42.23                   | 54.00           | 11.77       | Average  |
| @ 2408.400               | 28.42                 | 8.53            | 60.51                | 97.46                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2472MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 26/8       |

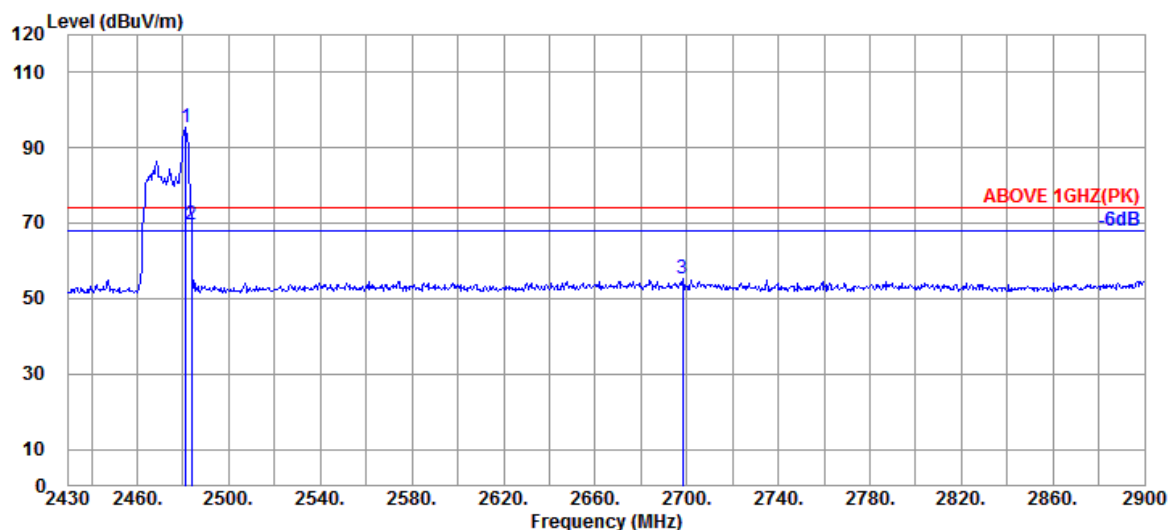

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2481.230               | 28.69                 | 8.58            | 58.10                | 95.37                   | ---             | ---         | Peak     |
| 2483.580                 | 28.70                 | 8.58            | 32.42                | 69.70                   | 74.00           | 4.30        | Peak     |
| 2698.370                 | 29.09                 | 8.64            | 17.40                | 55.13                   | 74.00           | 18.87       | Peak     |

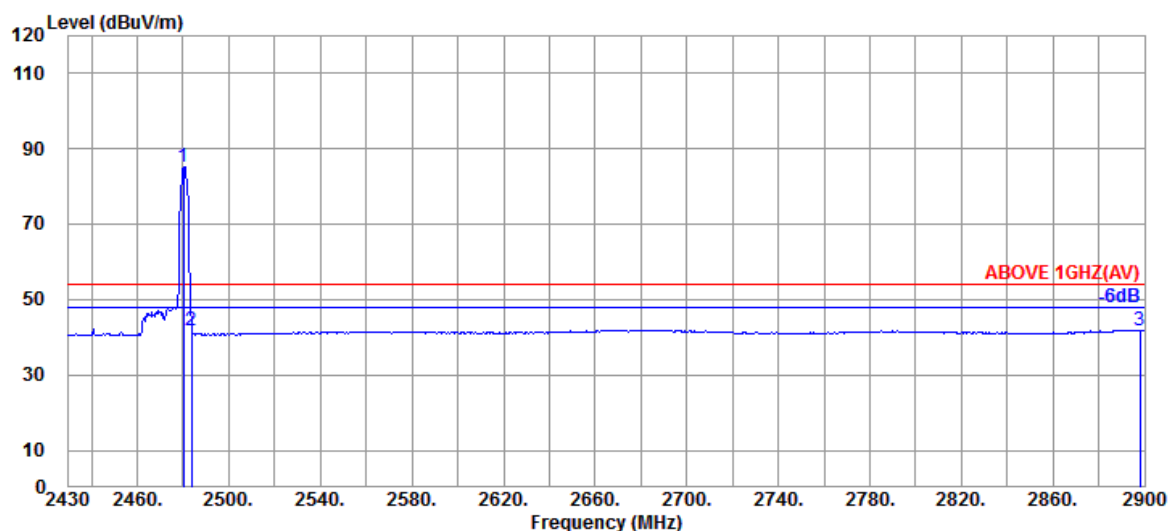

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.290               | 28.68                 | 8.58            | 47.85                | 85.11                   | ---             | ---         | Average  |
| 2483.580                 | 28.70                 | 8.58            | 4.55                 | 41.83                   | 54.00           | 12.17       | Average  |
| 2898.120                 | 29.58                 | 8.69            | 3.67                 | 41.94                   | 54.00           | 12.06       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2472MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 26/8       |

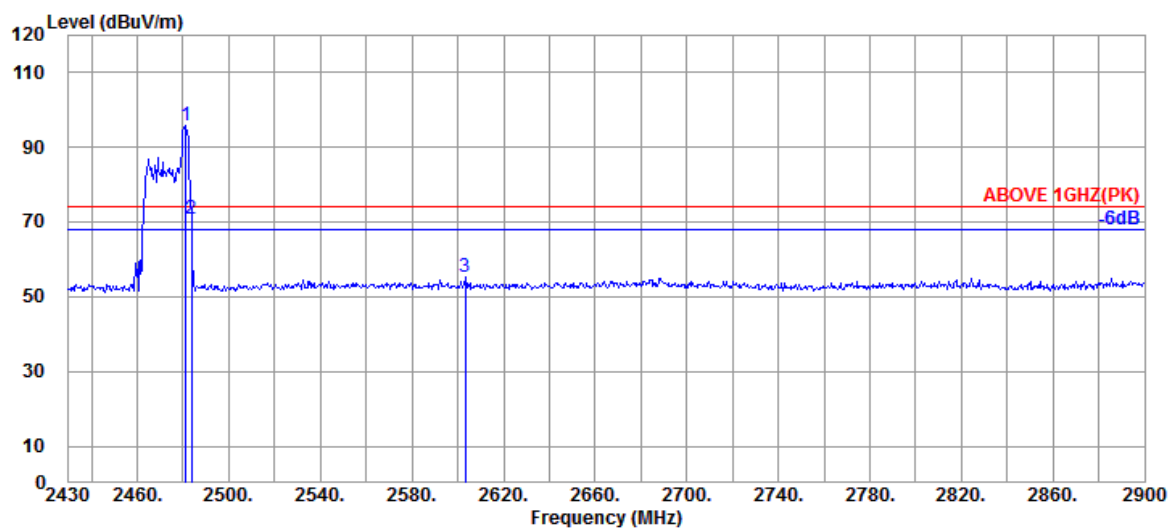

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2481.230                 | 28.69                 | 8.58            | 58.63                | 95.90                   | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 33.66                | 70.94                   | 74.00           | 3.06        | Peak     |
|   | 2603.430                 | 29.09                 | 8.61            | 17.41                | 55.11                   | 74.00           | 18.89       | Peak     |

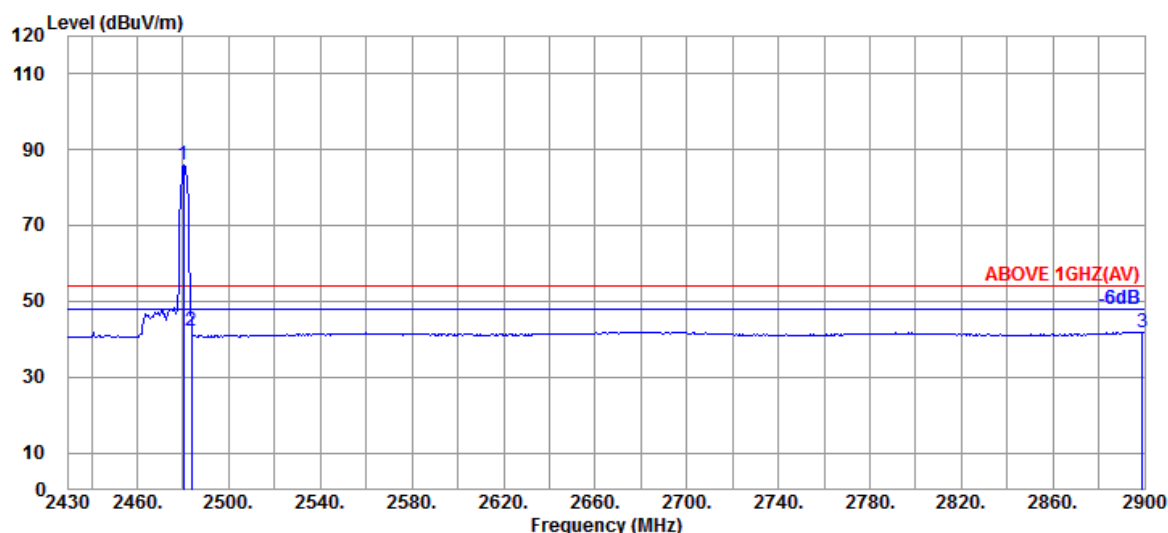

Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.290                 | 28.68                 | 8.58            | 48.67                | 85.93                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 4.71                 | 41.99                   | 54.00           | 12.01       | Average  |
|   | 2899.060                 | 29.59                 | 8.69            | 3.66                 | 41.94                   | 54.00           | 12.06       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency        | TX 2472MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 52/40      |

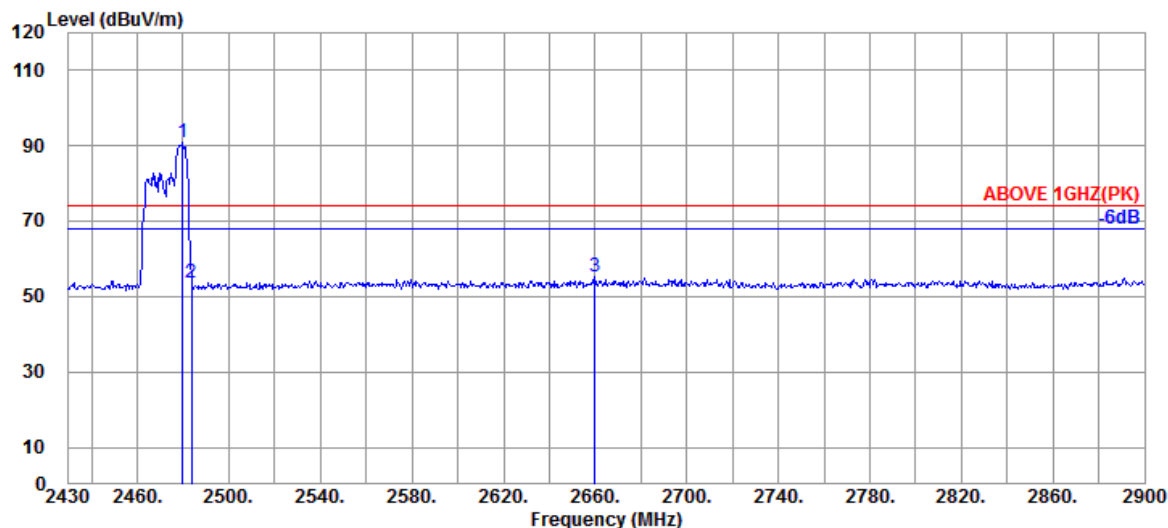

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2479.820               | 28.68                 | 8.58            | 53.72                | 90.98                   | ---             | ---         | Peak     |
| 2483.580                 | 28.70                 | 8.58            | 16.25                | 53.53                   | 74.00           | 20.47       | Peak     |
| 2659.830                 | 28.94                 | 8.63            | 17.65                | 55.22                   | 74.00           | 18.78       | Peak     |

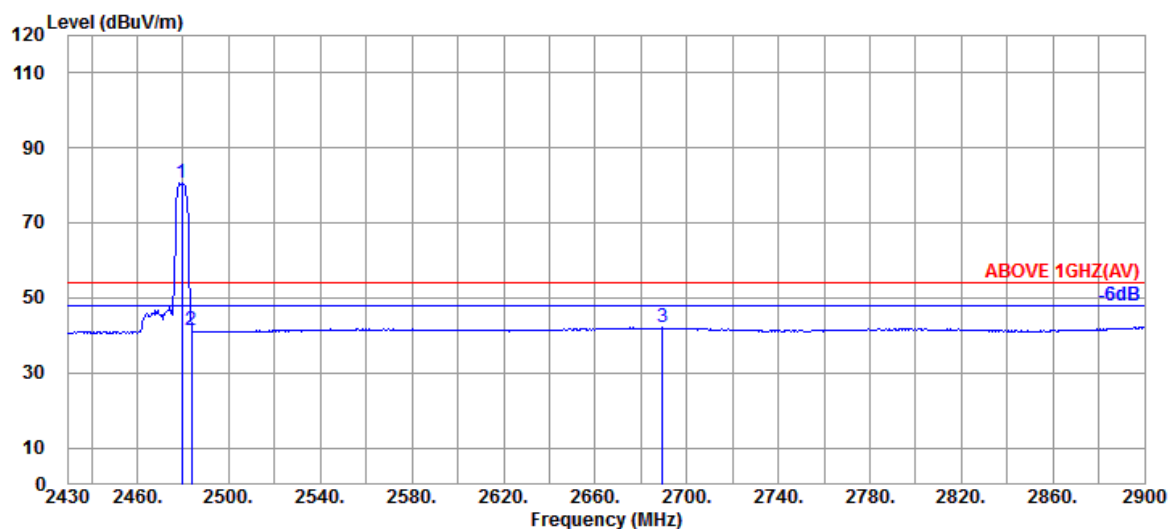

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2479.350               | 28.68                 | 8.58            | 43.26                | 80.52                   | ---             | ---         | Average  |
| 2483.580                 | 28.70                 | 8.58            | 3.99                 | 41.27                   | 54.00           | 12.73       | Average  |
| 2689.440                 | 29.06                 | 8.63            | 4.43                 | 42.12                   | 54.00           | 11.88       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2472MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 52/40      |

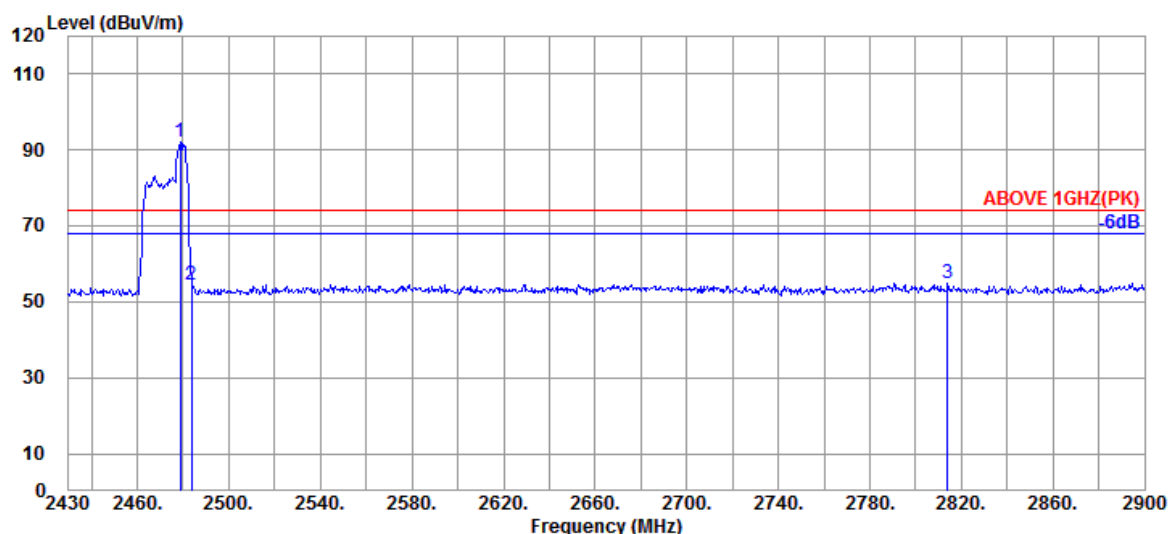

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2478.880                 | 28.67                 | 8.58            | 54.78                | 92.03                   | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 17.00                | 54.28                   | 74.00           | 19.72       | Peak     |
|   | 2813.990                 | 29.10                 | 8.67            | 17.30                | 55.07                   | 74.00           | 18.93       | Peak     |

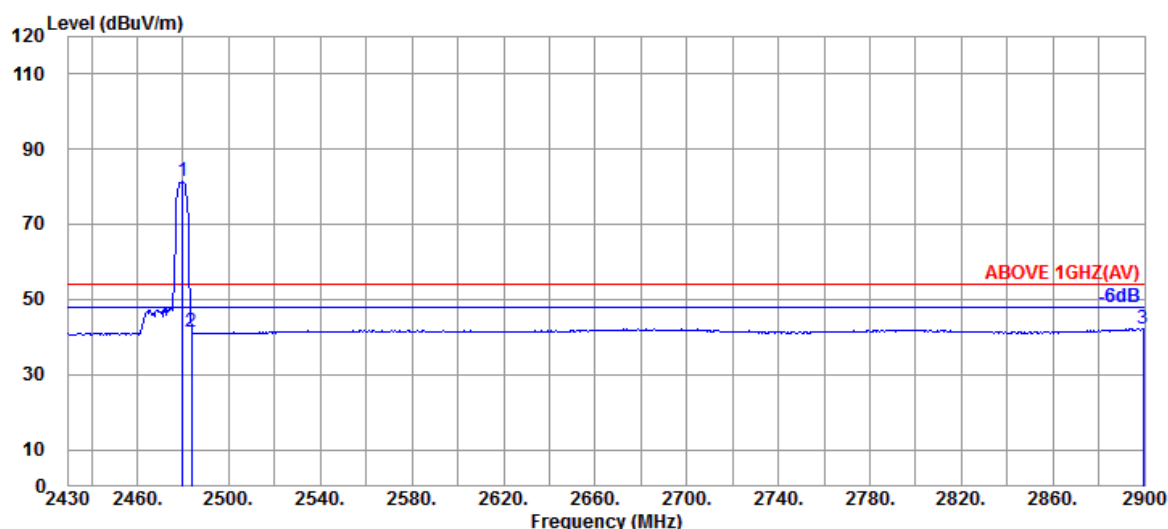

## Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2479.820                 | 28.68                 | 8.58            | 44.40                | 81.66                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 4.23                 | 41.51                   | 54.00           | 12.49       | Average  |
|   | 2899.530                 | 29.60                 | 8.69            | 3.92                 | 42.21                   | 54.00           | 11.79       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2472MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 106/54     |

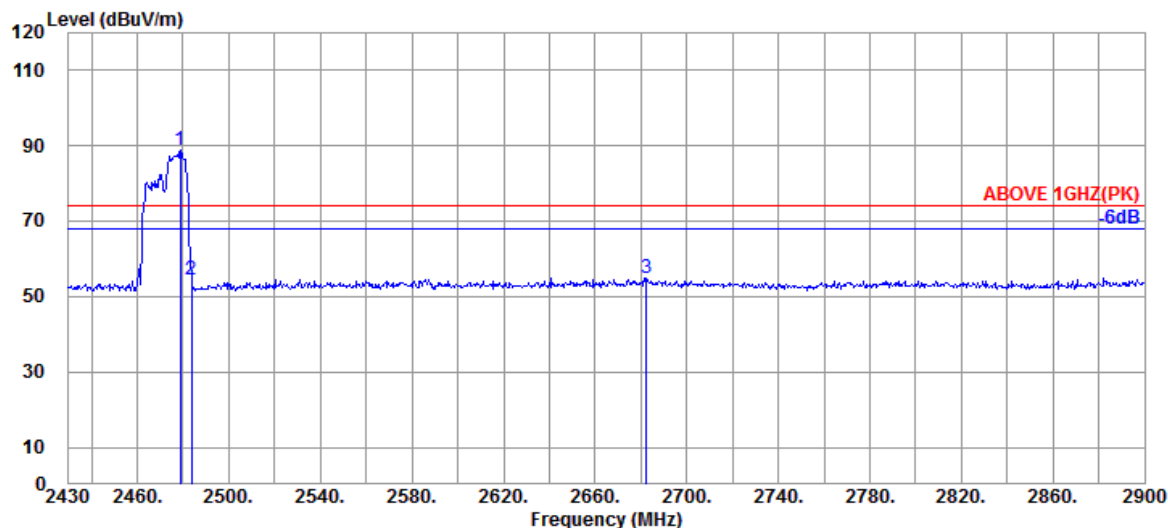

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2478.880               | 28.67                 | 8.58            | 51.57                | 88.82                   | ---             | ---         | Peak     |
| 2483.580                 | 28.70                 | 8.58            | 17.34                | 54.62                   | 74.00           | 19.38       | Peak     |
| 2682.390                 | 29.03                 | 8.63            | 17.21                | 54.87                   | 74.00           | 19.13       | Peak     |

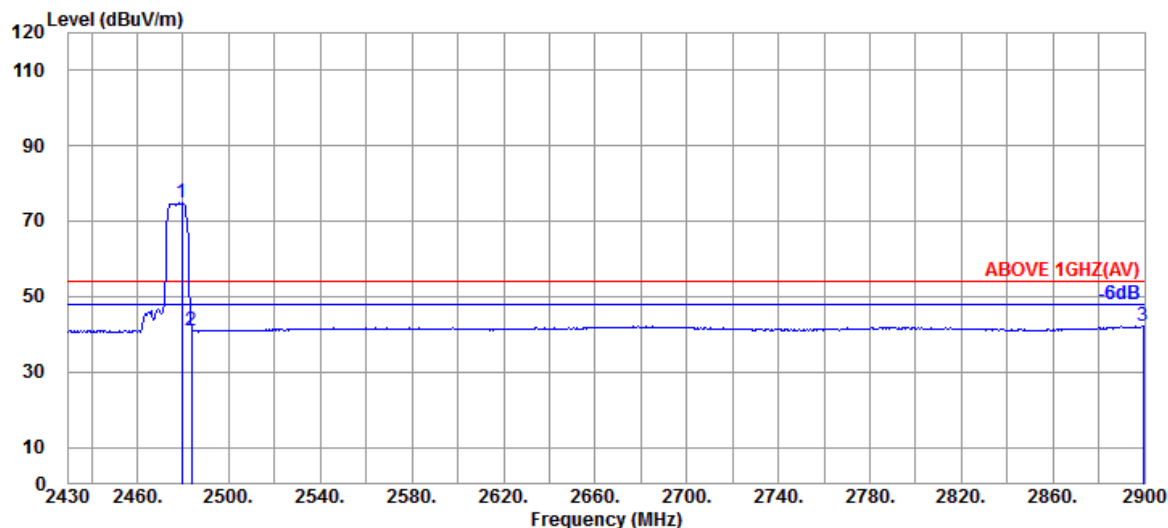

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2479.350               | 28.68                 | 8.58            | 37.59                | 74.85                   | ---             | ---         | Average  |
| 2483.580                 | 28.70                 | 8.58            | 3.81                 | 41.09                   | 54.00           | 12.91       | Average  |
| 2899.530                 | 29.60                 | 8.69            | 3.89                 | 42.18                   | 54.00           | 11.82       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency        | TX 2472MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 106/54     |

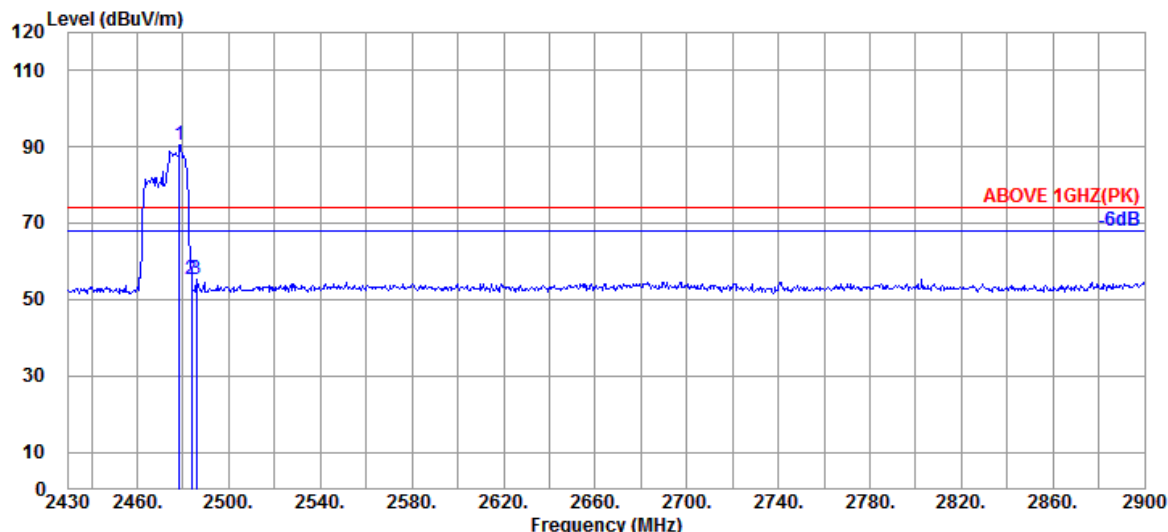

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2478.410                 | 28.67                 | 8.58            | 53.11                | 90.36                   | ---             | ---         | Peak     |
|   | 2483.580                 | 28.70                 | 8.58            | 17.91                | 55.19                   | 74.00           | 18.81       | Peak     |
|   | 2485.930                 | 28.72                 | 8.58            | 18.05                | 55.35                   | 74.00           | 18.65       | Peak     |

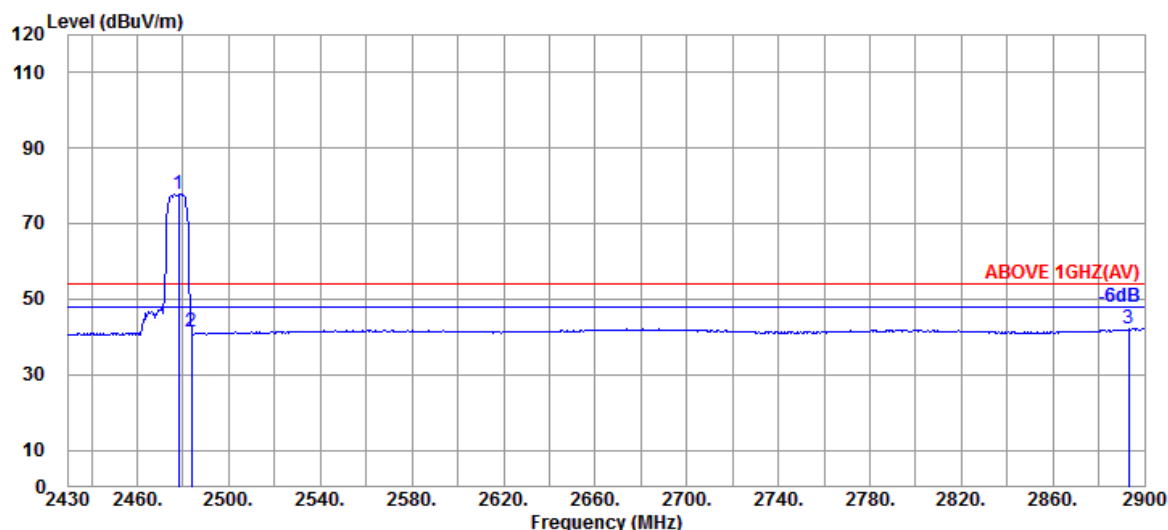

## Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2477.940                 | 28.67                 | 8.58            | 40.47                | 77.72                   | ---             | ---         | Average  |
|   | 2483.580                 | 28.70                 | 8.58            | 3.95                 | 41.23                   | 54.00           | 12.77       | Average  |
|   | 2892.950                 | 29.53                 | 8.68            | 3.97                 | 42.18                   | 54.00           | 11.82       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency        | TX 2422MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 242/61     |

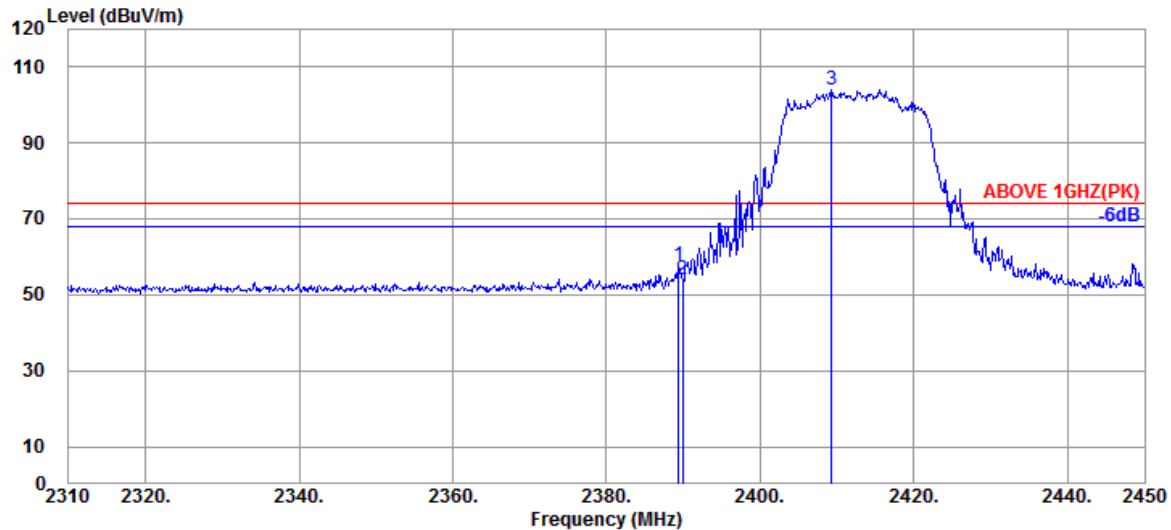

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.380                 | 28.32                 | 8.52            | 20.71                | 57.55                   | 74.00           | 16.45       | Peak     |
| 2389.940                 | 28.32                 | 8.52            | 17.23                | 54.07                   | 74.00           | 19.93       | Peak     |
| @ 2409.260               | 28.42                 | 8.53            | 67.12                | 104.07                  | ---             | ---         | Peak     |

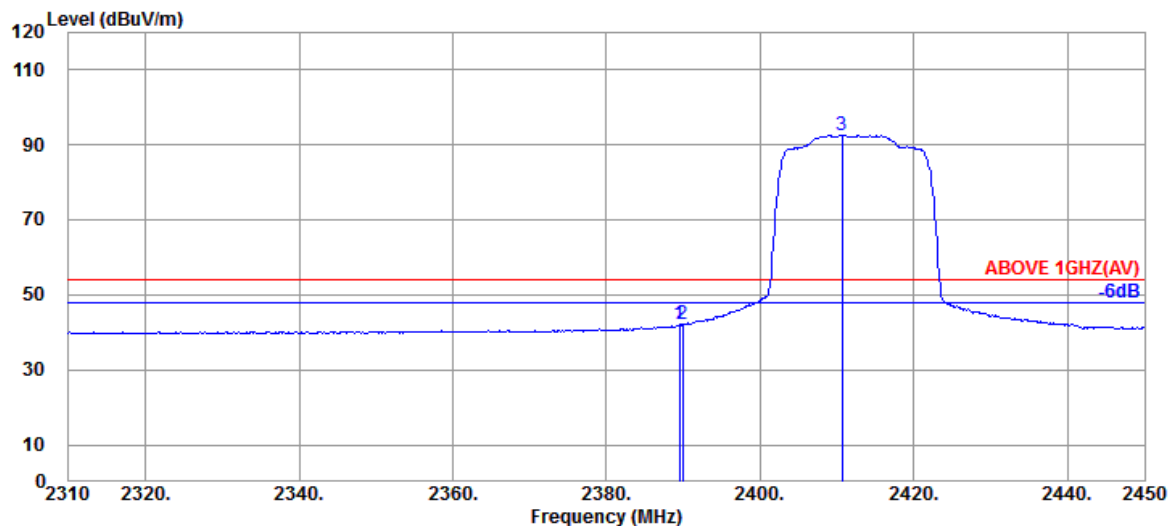

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.520                 | 28.32                 | 8.52            | 5.15                 | 41.99                   | 54.00           | 12.01       | Average  |
| 2389.940                 | 28.32                 | 8.52            | 5.24                 | 42.08                   | 54.00           | 11.92       | Average  |
| @ 2410.660               | 28.42                 | 8.53            | 55.69                | 92.64                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency        | TX 2422MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 242/61     |

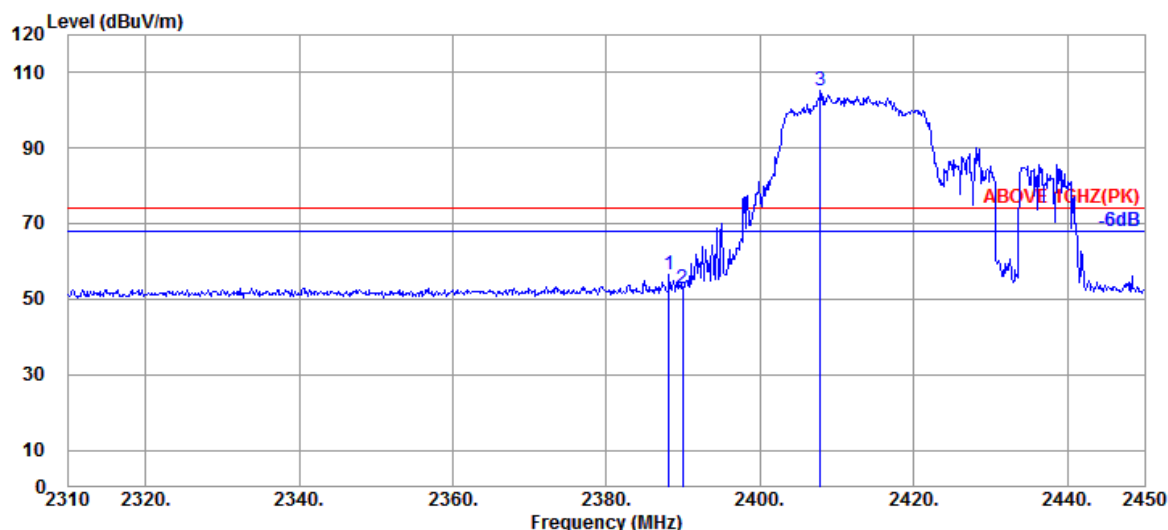

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2388.120                 | 28.30                 | 8.52            | 19.88                | 56.70                   | 74.00           | 17.30       | Peak     |
| 2389.940                 | 28.32                 | 8.52            | 16.09                | 52.93                   | 74.00           | 21.07       | Peak     |
| @ 2407.860               | 28.42                 | 8.53            | 68.17                | 105.12                  | ---             | ---         | Peak     |

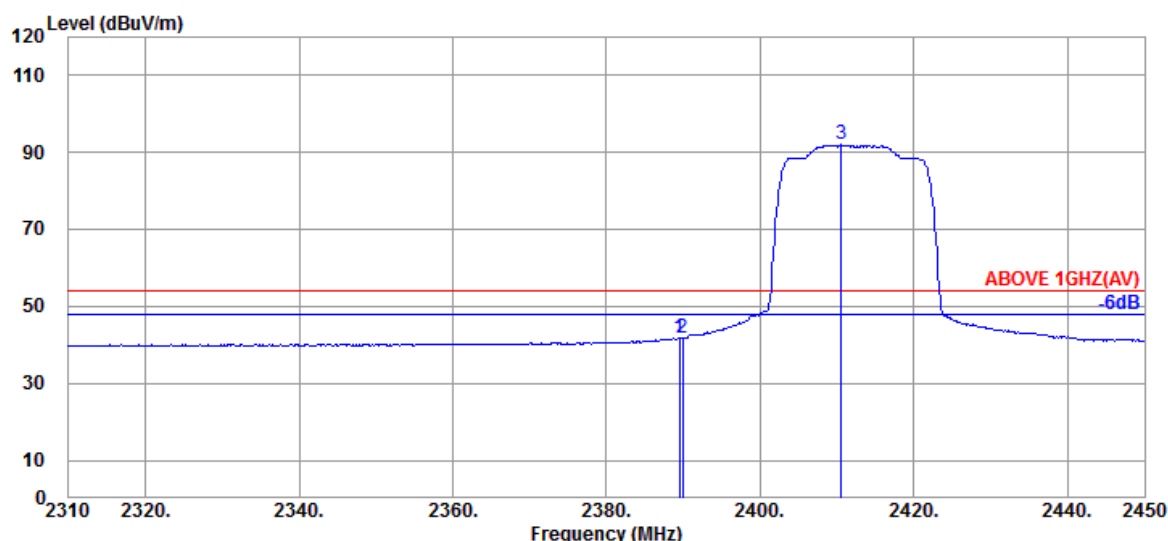

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.520                 | 28.32                 | 8.52            | 4.82                 | 41.66                   | 54.00           | 12.34       | Average  |
| 2389.940                 | 28.32                 | 8.52            | 5.05                 | 41.89                   | 54.00           | 12.11       | Average  |
| @ 2410.520               | 28.42                 | 8.53            | 55.08                | 92.03                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency        | TX 2462MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 242/62     |

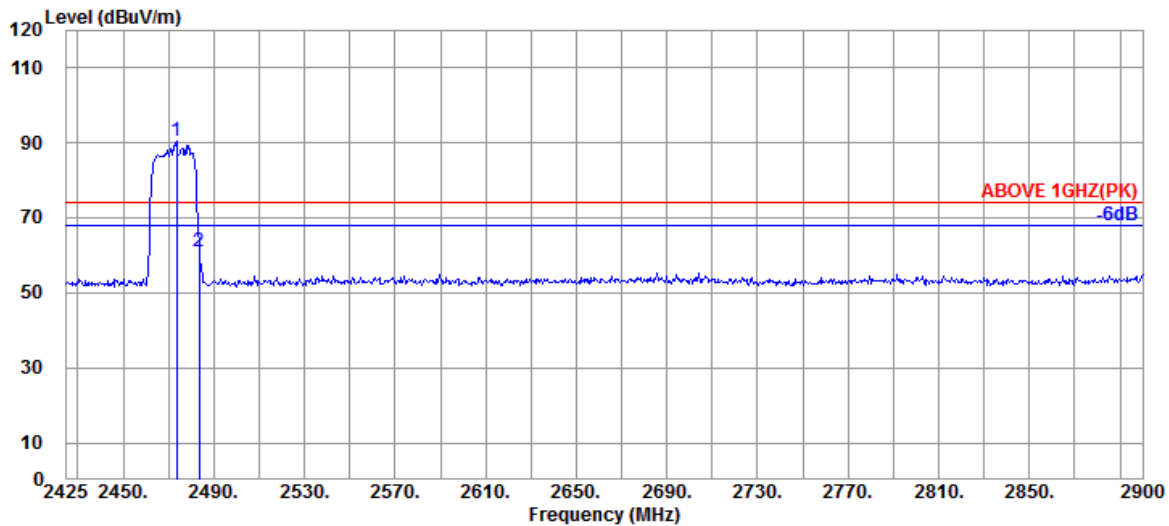

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2473.450                 | 28.64                 | 8.58            | 53.15                | 90.37                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 23.59                | 60.87                   | 74.00           | 13.13       | Peak     |
|   | 2900.000                 | 29.60                 | 8.69            | 17.06                | 55.35                   | 74.00           | 18.65       | Peak     |

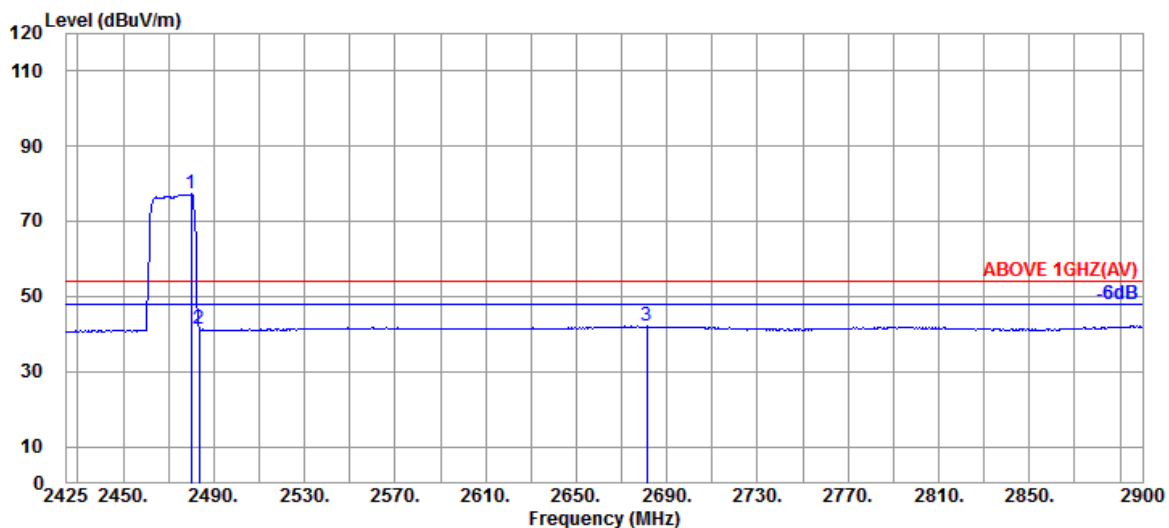

Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.100                 | 28.68                 | 8.58            | 40.03                | 77.29                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 4.00                 | 41.28                   | 54.00           | 12.72       | Average  |
|   | 2681.025                 | 29.02                 | 8.63            | 4.46                 | 42.11                   | 54.00           | 11.89       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency        | TX 2462MHz |
|------|---------------|------------------|------------|
|      |               | RU Configuration | 242/62     |

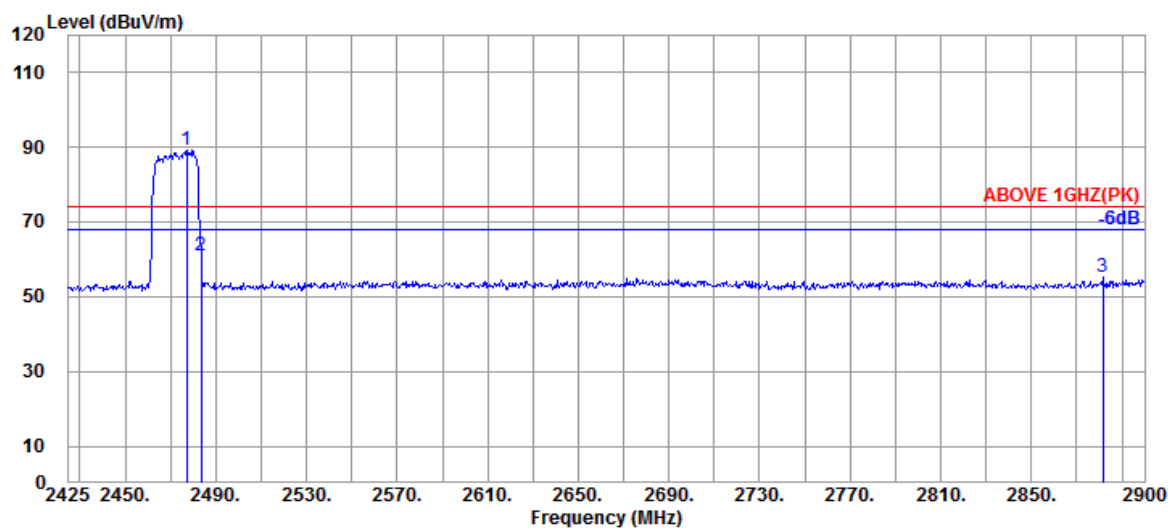

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2477.250                 | 28.66                 | 8.58            | 52.23                | 89.47                   | ---             | ---         | Peak     |
|   | 2483.425                 | 28.70                 | 8.58            | 23.58                | 60.86                   | 74.00           | 13.14       | Peak     |
|   | 2881.475                 | 29.41                 | 8.68            | 17.39                | 55.48                   | 74.00           | 18.52       | Peak     |

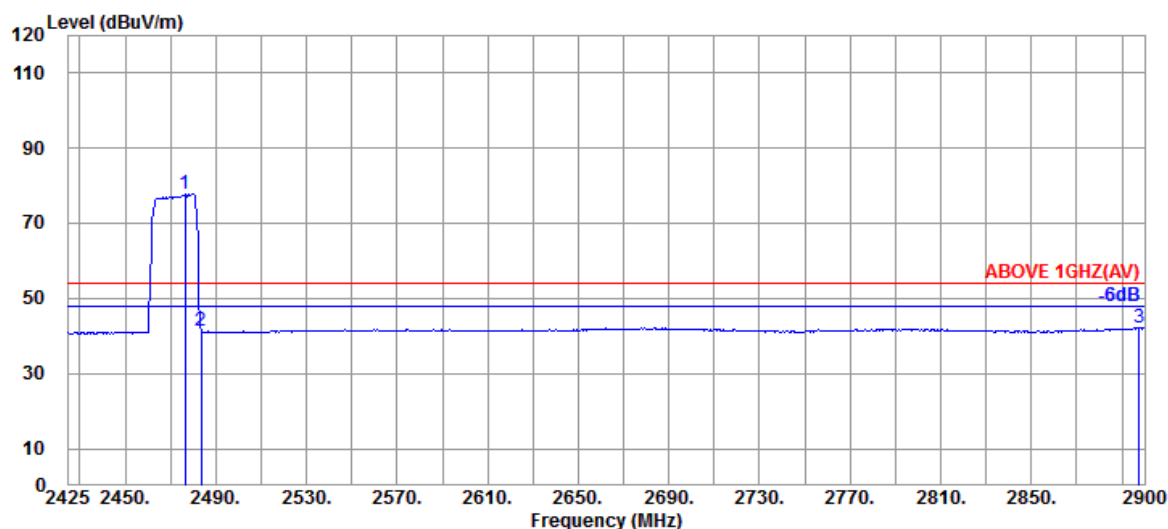

Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2476.300                 | 28.66                 | 8.58            | 40.60                | 77.84                   | ---             | ---         | Average  |
|   | 2483.425                 | 28.70                 | 8.58            | 4.06                 | 41.34                   | 54.00           | 12.66       | Average  |
|   | 2897.625                 | 29.58                 | 8.69            | 4.02                 | 42.29                   | 54.00           | 11.71       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | BLE | Frequency | TX 2402MHz |
|------|-----|-----------|------------|
|------|-----|-----------|------------|

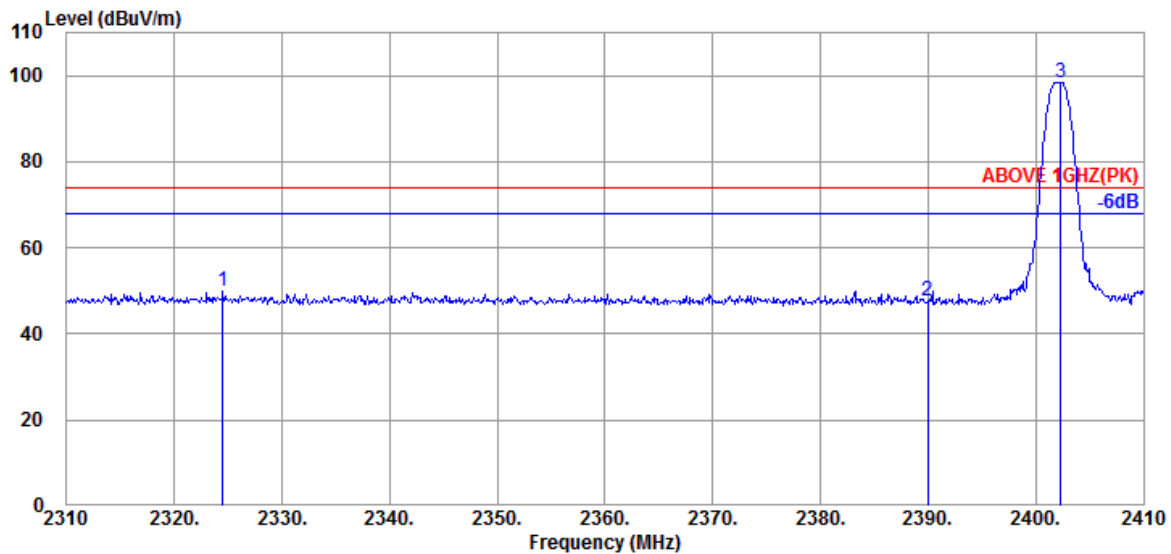

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2324.500                 | 27.90                 | 8.47            | 13.55                | 49.92                   | 74.00           | 24.08       | Peak     |
| 2390.000                 | 28.32                 | 8.52            | 10.82                | 47.66                   | 74.00           | 26.34       | Peak     |
| @ 2402.300               | 28.40                 | 8.52            | 61.42                | 98.34                   | ---             | ---         | Peak     |

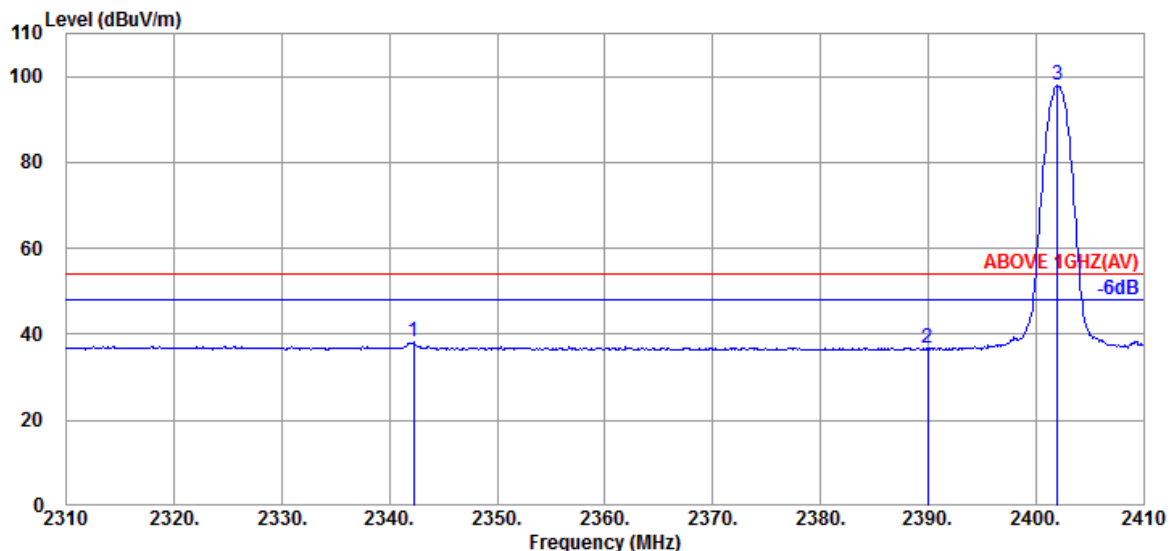

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2342.200                 | 27.97                 | 8.48            | 1.72                 | 38.17                   | 54.00           | 15.83       | Average  |
| 2390.000                 | 28.32                 | 8.52            | -0.12                | 36.72                   | 54.00           | 17.28       | Average  |
| @ 2402.000               | 28.40                 | 8.52            | 60.99                | 97.91                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Mode | BLE | Frequency | TX 2402MHz |
|------|-----|-----------|------------|
|------|-----|-----------|------------|

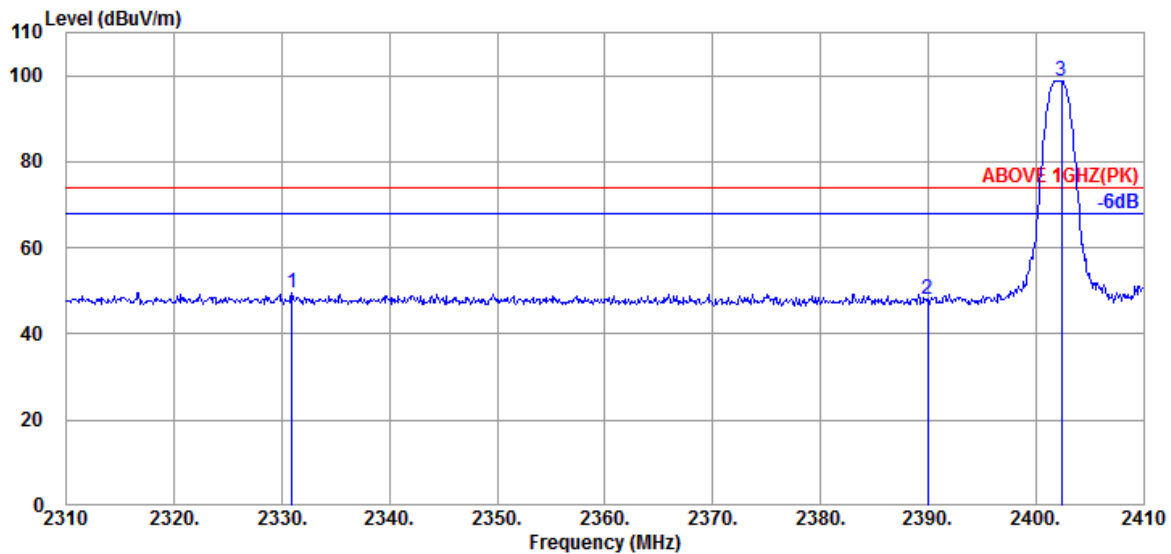

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2330.900                 | 27.92                 | 8.47            | 13.13                | 49.52                   | 74.00           | 24.48       | Peak     |
| 2390.000                 | 28.32                 | 8.52            | 11.35                | 48.19                   | 74.00           | 25.81       | Peak     |
| @ 2402.400               | 28.40                 | 8.52            | 61.86                | 98.78                   | ---             | ---         | Peak     |

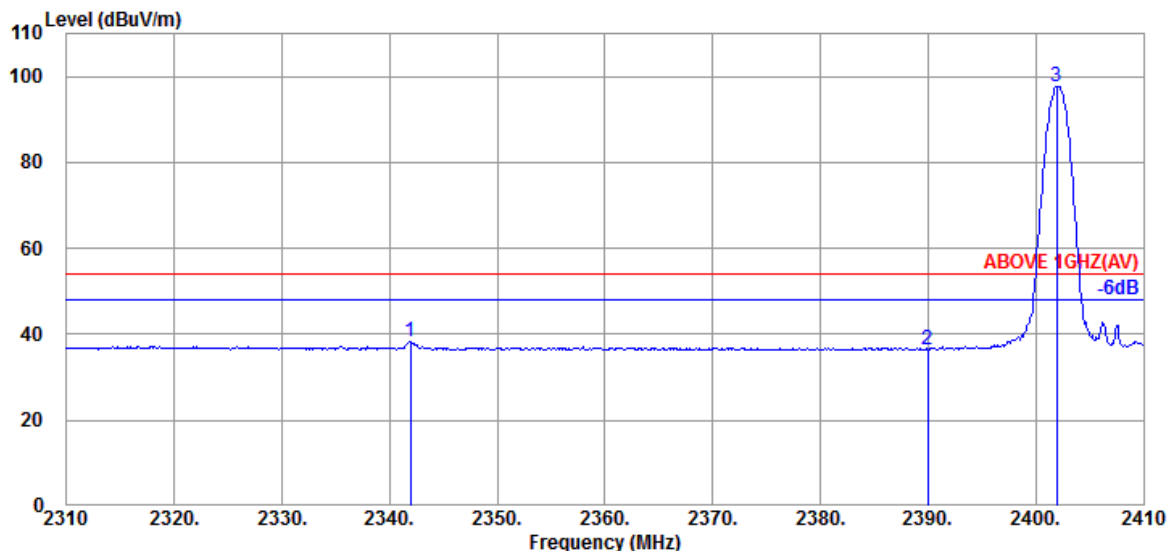

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2341.900                 | 27.97                 | 8.48            | 1.88                 | 38.33                   | 54.00           | 15.67       | Average  |
| 2390.000                 | 28.32                 | 8.52            | -0.25                | 36.59                   | 54.00           | 17.41       | Average  |
| @ 2401.900               | 28.40                 | 8.52            | 60.85                | 97.77                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

| Mode | BLE | Frequency | TX 2480MHz |
|------|-----|-----------|------------|
|------|-----|-----------|------------|

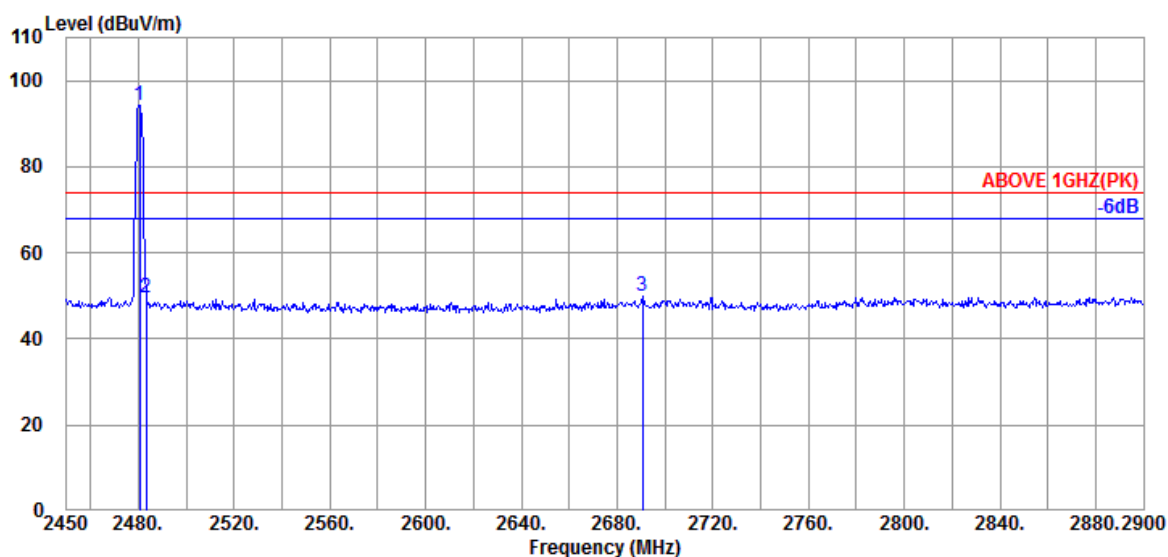

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.600                 | 28.68                 | 8.58            | 57.06                | 94.32                   | ---             | ---         | Peak     |
|   | 2483.300                 | 28.70                 | 8.58            | 12.20                | 49.48                   | 74.00           | 24.52       | Peak     |
|   | 2690.750                 | 29.06                 | 8.63            | 12.08                | 49.77                   | 74.00           | 24.23       | Peak     |

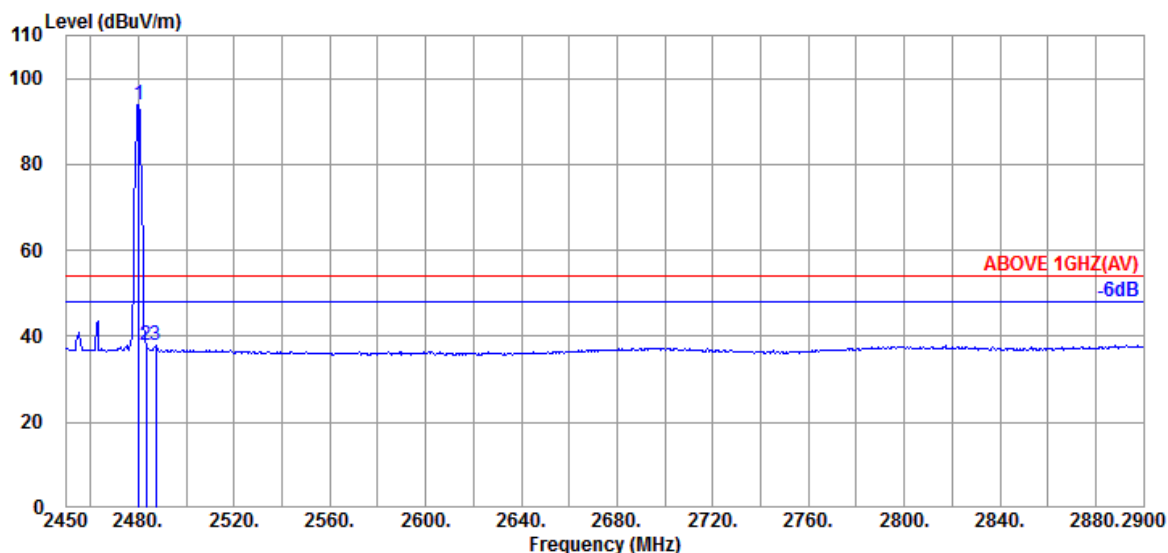

## Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.150                 | 28.68                 | 8.58            | 56.56                | 93.82                   | ---             | ---         | Average  |
|   | 2483.300                 | 28.70                 | 8.58            | 0.79                 | 38.07                   | 54.00           | 15.93       | Average  |
|   | 2487.350                 | 28.72                 | 8.58            | 0.59                 | 37.89                   | 54.00           | 16.11       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2003035

Report Number: EM-F200116


**This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.**

| Mode | BLE | Frequency | TX 2480MHz |
|------|-----|-----------|------------|
|------|-----|-----------|------------|

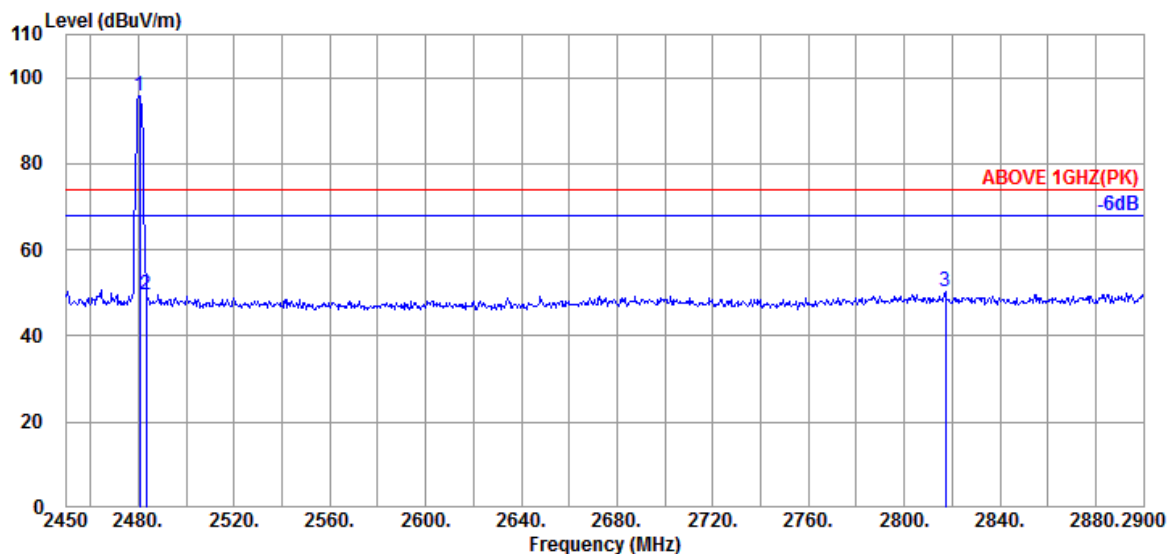

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.600                 | 28.68                 | 8.58            | 58.54                | 95.80                   | ---             | ---         | Peak     |
|   | 2483.300                 | 28.70                 | 8.58            | 12.26                | 49.54                   | 74.00           | 24.46       | Peak     |
|   | 2817.200                 | 29.10                 | 8.67            | 12.38                | 50.15                   | 74.00           | 23.85       | Peak     |

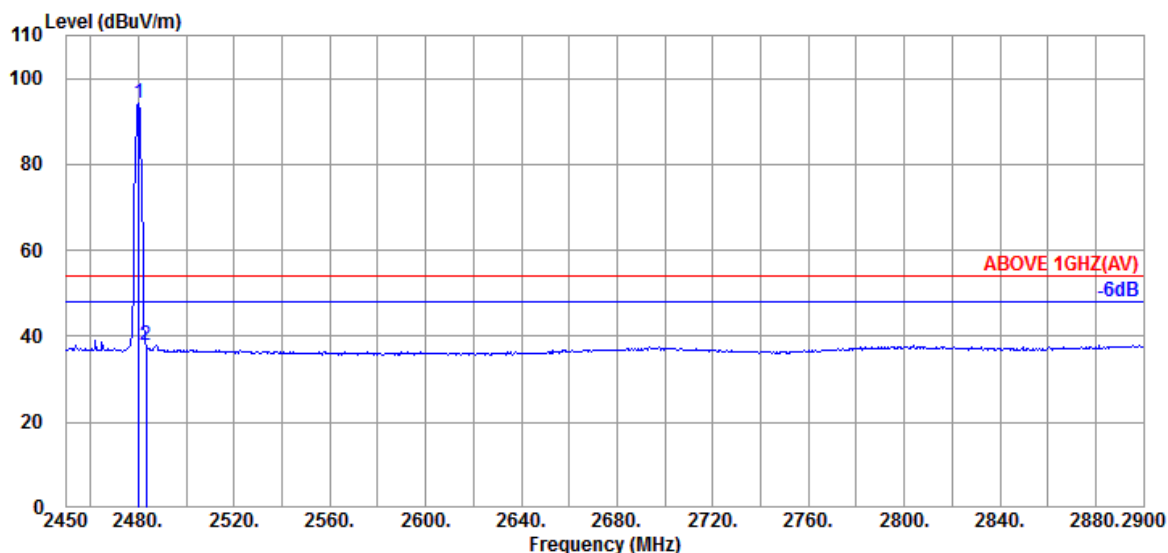

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.150                 | 28.68                 | 8.58            | 56.82                | 94.08                   | ---             | ---         | Average  |
|   | 2483.300                 | 28.70                 | 8.58            | 0.69                 | 37.97                   | 54.00           | 16.03       | Average  |
|   | 2900.000                 | 29.60                 | 8.69            | -0.20                | 38.09                   | 54.00           | 15.91       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**A.2.2 Emissions outside the frequency band:**

The emissions (up to 25GHz) not reported for there is no emission be found.

|      |         |           |            |
|------|---------|-----------|------------|
| Mode | 802.11b | Frequency | TX 2442MHz |
|------|---------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 37.92                      | 47.26                         | 54.00              | 6.74           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 37.68                      | 47.02                         | 54.00              | 6.98           | Peak     |

|      |         |           |            |
|------|---------|-----------|------------|
| Mode | 802.11g | Frequency | TX 2442MHz |
|------|---------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 35.83                      | 45.17                         | 54.00              | 8.83           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------|-------------------------------|--------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 35.46                      | 44.80                         | 54.00              | 9.20           | Peak     |

**Audix Technology Corp.**

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | Frequency | TX 2442MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 35.03                            | 44.37                               | 54.00                    | 9.63           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 34.64                            | 43.98                               | 54.00                    | 10.02          | Peak     |

| Mode | 802.11n-HT40 | Frequency | TX 2442MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 31.08                            | 40.42                               | 54.00                    | 13.58          | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 31.43                            | 40.77                               | 54.00                    | 13.23          | Peak     |

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2442MHz |
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 36.13                            | 45.47                               | 54.00                    | 8.53           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 36.64                            | 45.98                               | 54.00                    | 8.02           | Peak     |

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE40 | Frequency | TX 2442MHz |
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 31.67                            | 41.01                               | 54.00                    | 12.99          | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Meter<br>Reading<br>(dB $\mu$ V) | Emission<br>Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|----------------------------------|-------------------------------------|--------------------------|----------------|----------|
| 4884.000                       | 33.53                       | 10.24                 | 31.51                            | 40.85                               | 54.00                    | 13.15          | Peak     |

| Mode | BLE (1M) | Frequency | TX 2402MHz |
|------|----------|-----------|------------|
|------|----------|-----------|------------|

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4804.000                 | 33.30                 | 10.22           | -1.94                      | 41.58                         | 54.00                 | 12.42       | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4804.000                 | 33.30                 | 10.22           | -2.10                      | 41.42                         | 54.00                 | 12.58       | Peak     |

| Mode | BLE | Frequency | TX 2440MHz |
|------|-----|-----------|------------|
|------|-----|-----------|------------|

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4880.000                 | 33.53                 | 10.24           | -3.14                      | 40.63                         | 54.00                 | 13.37       | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4880.000                 | 33.53                 | 10.24           | -3.57                      | 40.20                         | 54.00                 | 13.80       | Peak     |

| Mode | BLE | Frequency | TX 2480MHz |
|------|-----|-----------|------------|
|------|-----|-----------|------------|

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4960.000                 | 33.73                 | 10.27           | -3.65                      | 40.35                         | 54.00                 | 13.65       | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB $\mu$ V) | Emission Level (dB $\mu$ V/m) | Limits (dB $\mu$ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4960.000                 | 33.73                 | 10.27           | -3.08                      | 40.92                         | 54.00                 | 13.08       | Peak     |

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

---

#### A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

## A.3 6dB/OCCUPIED BANDWIDTH

|              |                                |            |                  |
|--------------|--------------------------------|------------|------------------|
| Test Date    | 2019/09/19 ~ 25                | Temp./Hum. | 24~25°C / 50~54% |
| Cable Loss   | 0.5dB                          | Tested By  | Martin Chen      |
| Test Voltage | AC 120V, 60Hz (via AC Adapter) |            |                  |

### A.3.1 Emission Bandwidth Result

| Mode          | Centre Frequency (MHz) | 6 dB Bandwidth (MHz) | Occupied (99%) Bandwidth (MHz) | Limit   |
|---------------|------------------------|----------------------|--------------------------------|---------|
| 802.11b       | 2412                   | 10.14                | 13.386                         | >500kHz |
|               | 2442                   | 10.14                | 13.444                         |         |
|               | 2462                   | 10.14                | 13.398                         |         |
|               | 2472                   | 10.14                | 13.854                         |         |
| 802.11g       | 2412                   | 16.38                | 16.607                         |         |
|               | 2442                   | 16.40                | 16.800                         |         |
|               | 2462                   | 16.38                | 16.678                         |         |
|               | 2472                   | 16.38                | 16.370                         |         |
| 802.11n-HT20  | 2412                   | 17.62                | 17.781                         |         |
|               | 2442                   | 17.62                | 17.812                         |         |
|               | 2462                   | 17.62                | 17.794                         |         |
|               | 2472                   | 17.62                | 17.594                         |         |
| 802.11n-HT40  | 2422                   | 36.40                | 36.208                         |         |
|               | 2442                   | 36.40                | 36.231                         |         |
|               | 2452                   | 36.36                | 36.187                         |         |
|               | 2462                   | 36.36                | 36.106                         |         |
| 802.11ax-HE20 | 2412                   | 18.98                | 18.978                         |         |
|               | 2442                   | 18.85                | 18.988                         |         |
|               | 2462                   | 18.85                | 19.011                         |         |
|               | 2472                   | 18.63                | 18.708                         |         |
| 802.11ax-HE40 | 2422                   | 38.01                | 37.753                         |         |
|               | 2442                   | 38.02                | 37.729                         |         |
|               | 2452                   | 38.03                | 37.740                         |         |
|               | 2462                   | 37.77                | 37.474                         |         |

**Audix Technology Corp.**

No. 53-11, Dingfu, Linkou, Dist.,


New Taipei City244, Taiwan


**Tel: +886 2 26099301****Fax: +886 2 26099303**

| Mode          | RU Configuration | Centre Frequency (MHz) | 6 dB Bandwidth (MHz) | Occupied (99%) Bandwidth (MHz) | Limit   |
|---------------|------------------|------------------------|----------------------|--------------------------------|---------|
| 802.11ax-HE20 | 26/0             | 2412                   | 2.063                | 18.272                         | >500kHz |
|               | 52/37            |                        | 14.48                | 18.129                         |         |
|               | 106/53           |                        | 17.19                | 18.198                         |         |
|               | 26/8             | 2472                   | 2.032                | 18.036                         |         |
|               | 52/40            |                        | 16.96                | 17.940                         |         |
|               | 106/54           |                        | 17.04                | 17.965                         |         |
| 802.11ax-HE40 | 242/61           | 2422                   | 18.88                | 18.740                         |         |
|               | 242/62           | 2462                   | 18.58                | 18.513                         |         |

| Mode | Centre Frequency (MHz) | 6 dB Bandwidth (MHz) | Occupied (99%) Bandwidth (MHz) | Limit   |
|------|------------------------|----------------------|--------------------------------|---------|
| BLE  | 2402                   | 0.6760               | 1.0648                         | >500kHz |
|      | 2440                   | 0.6844               | 1.0613                         |         |
|      | 2480                   | 0.6956               | 1.0633                         |         |


### A.3.2 Measurement Plots

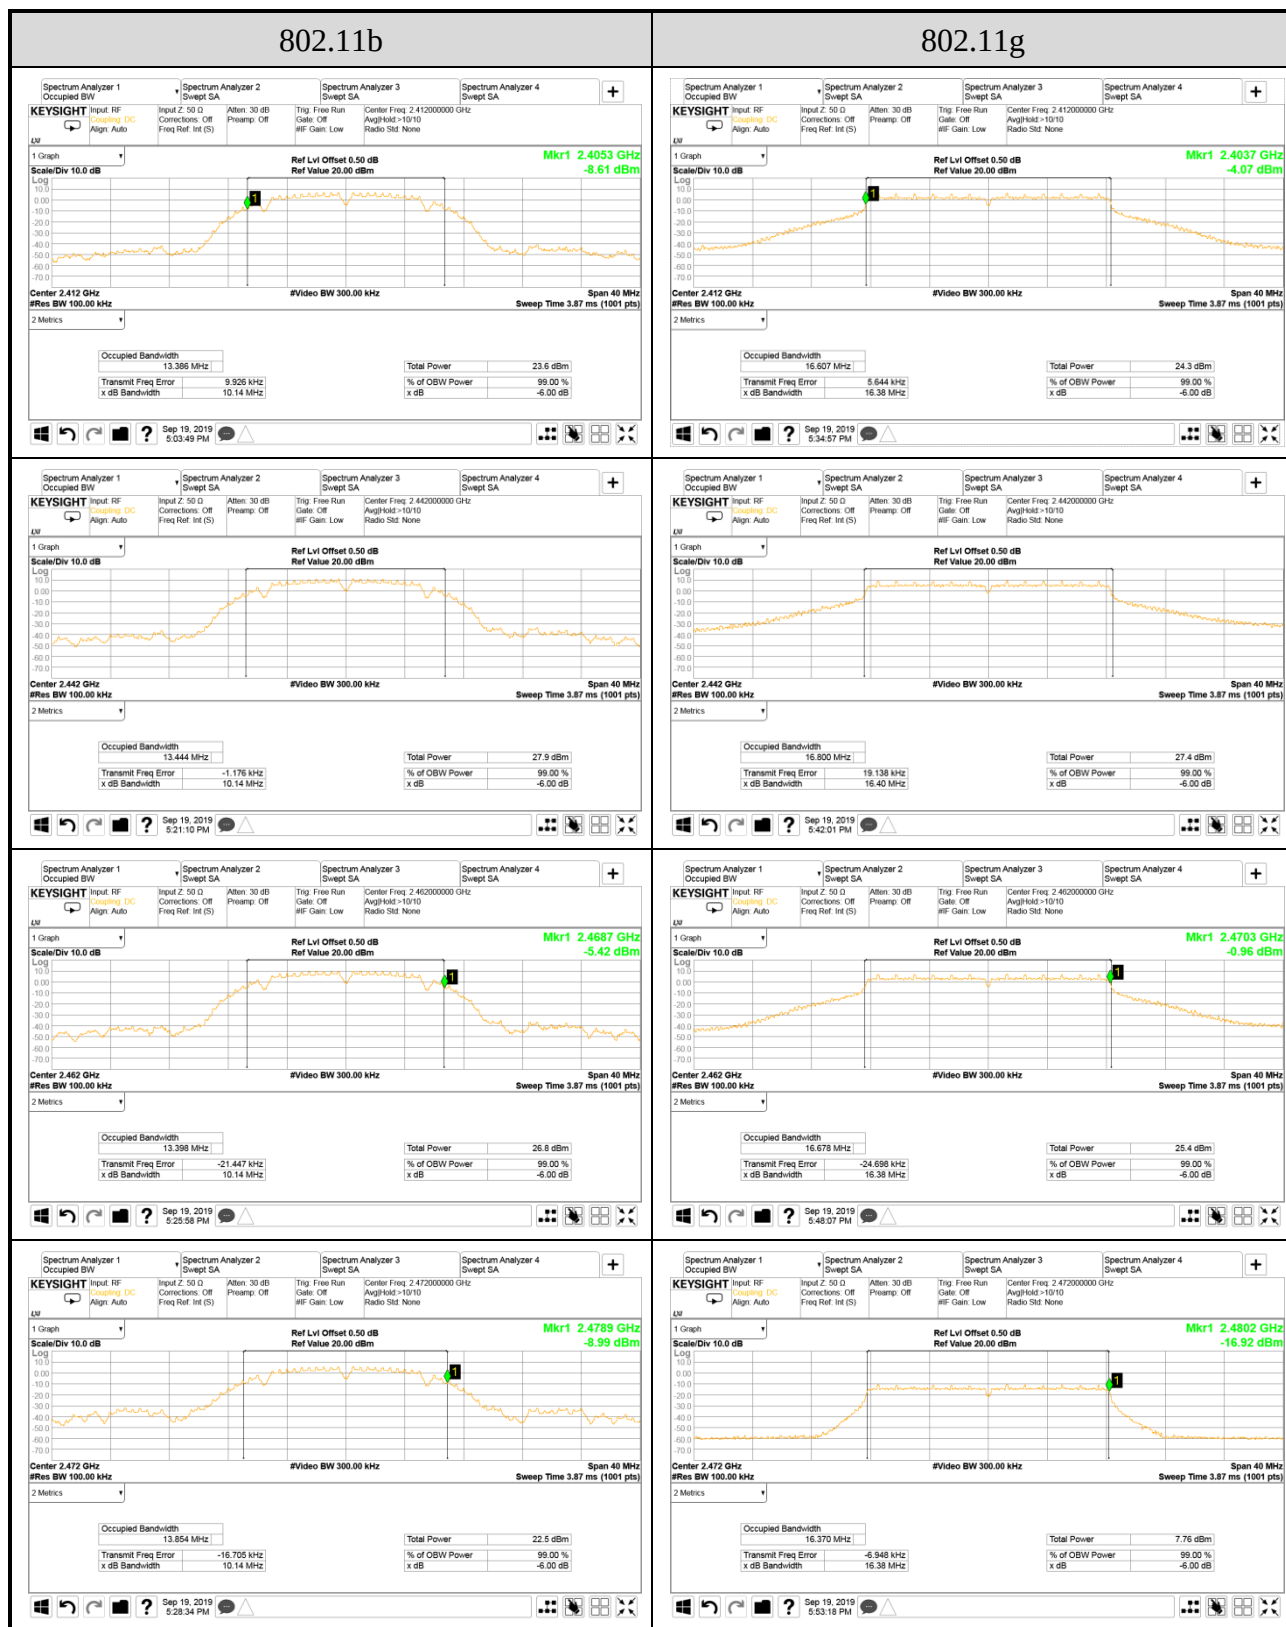

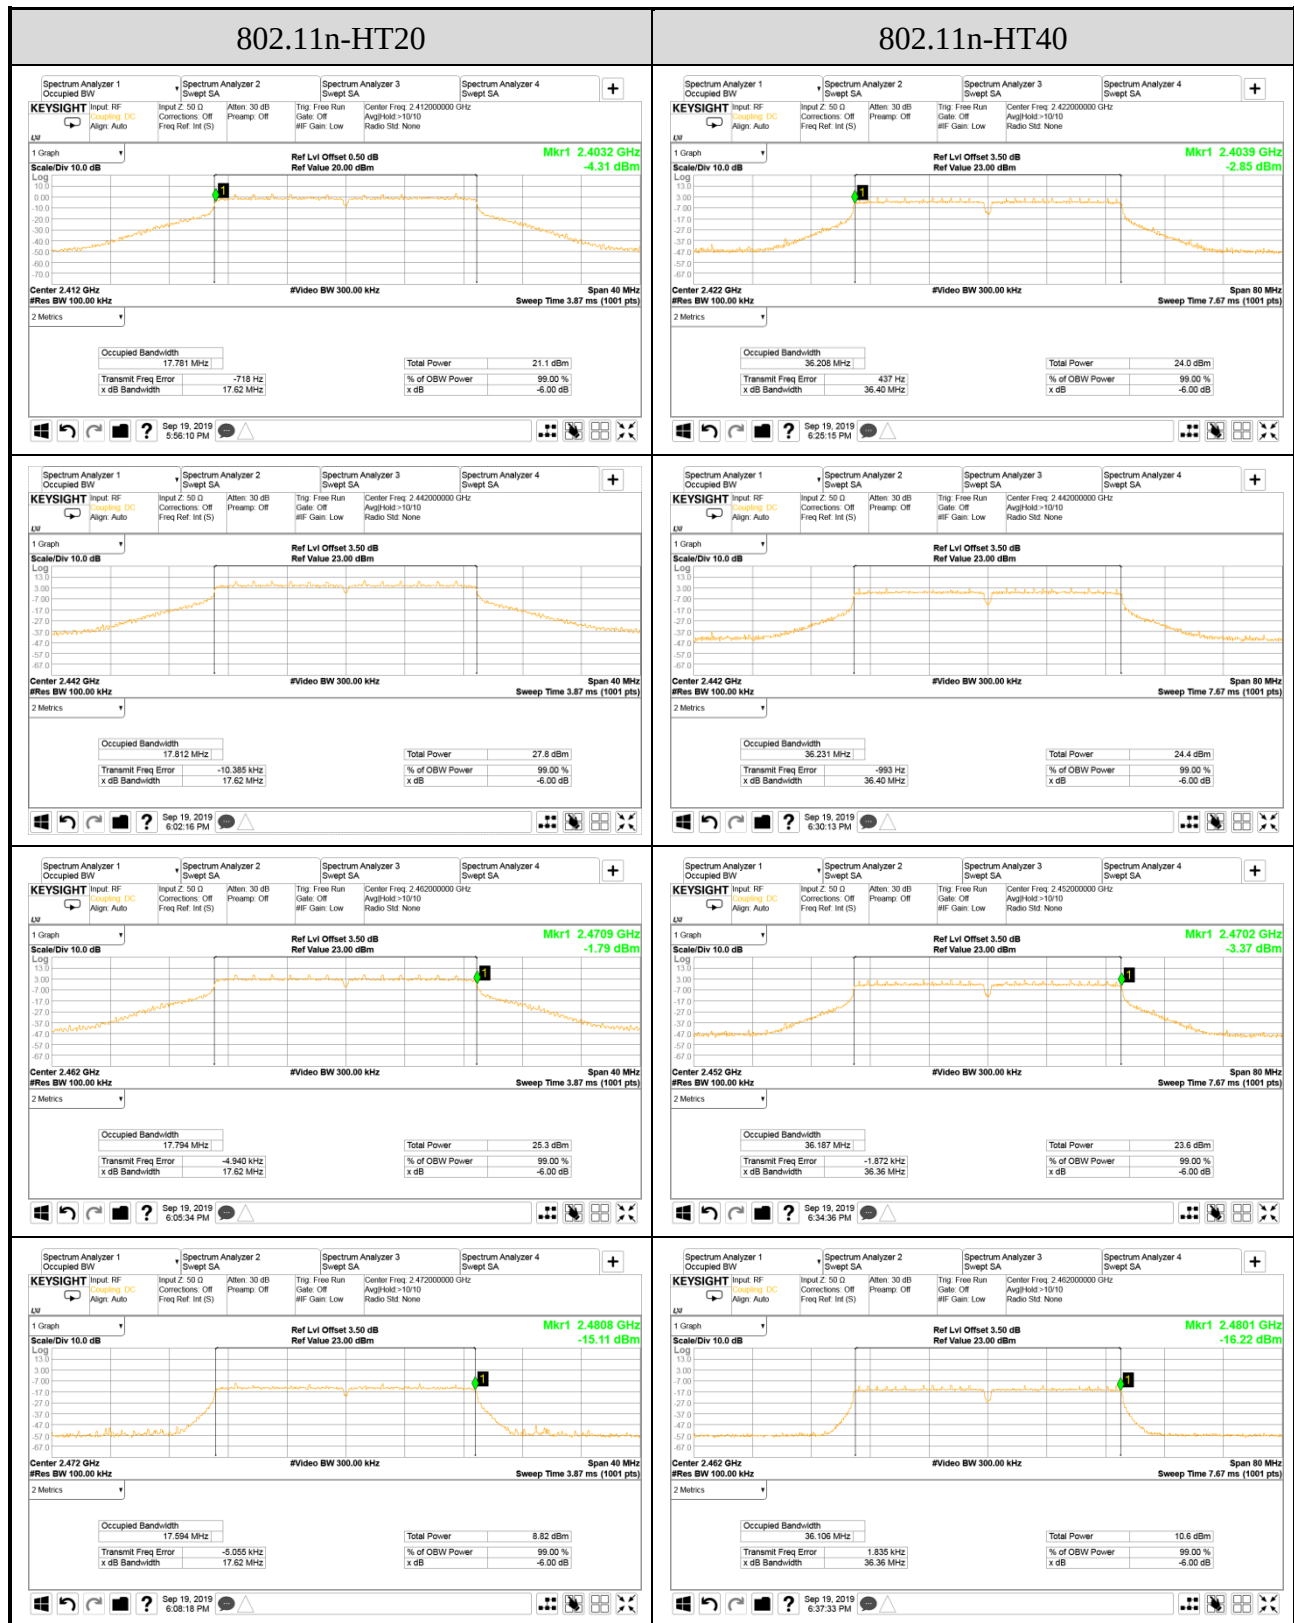


**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

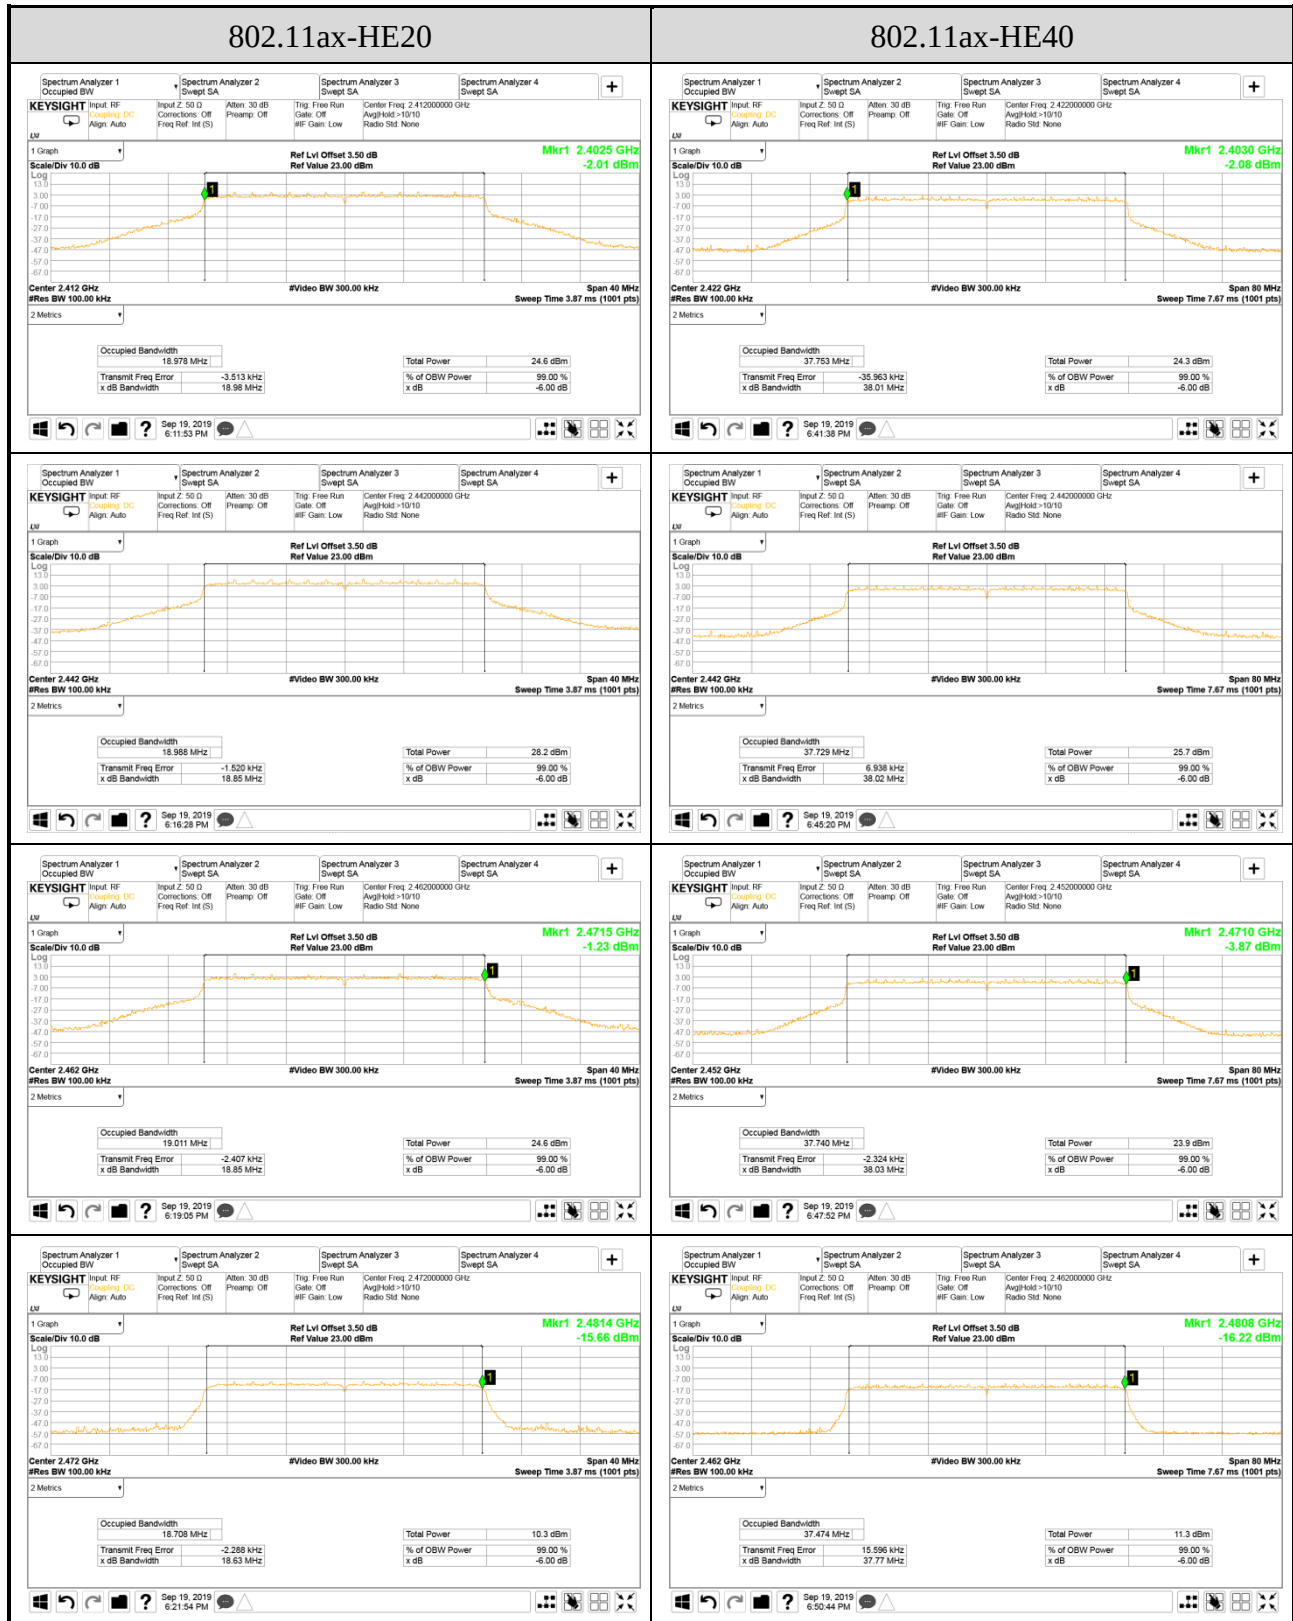


**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

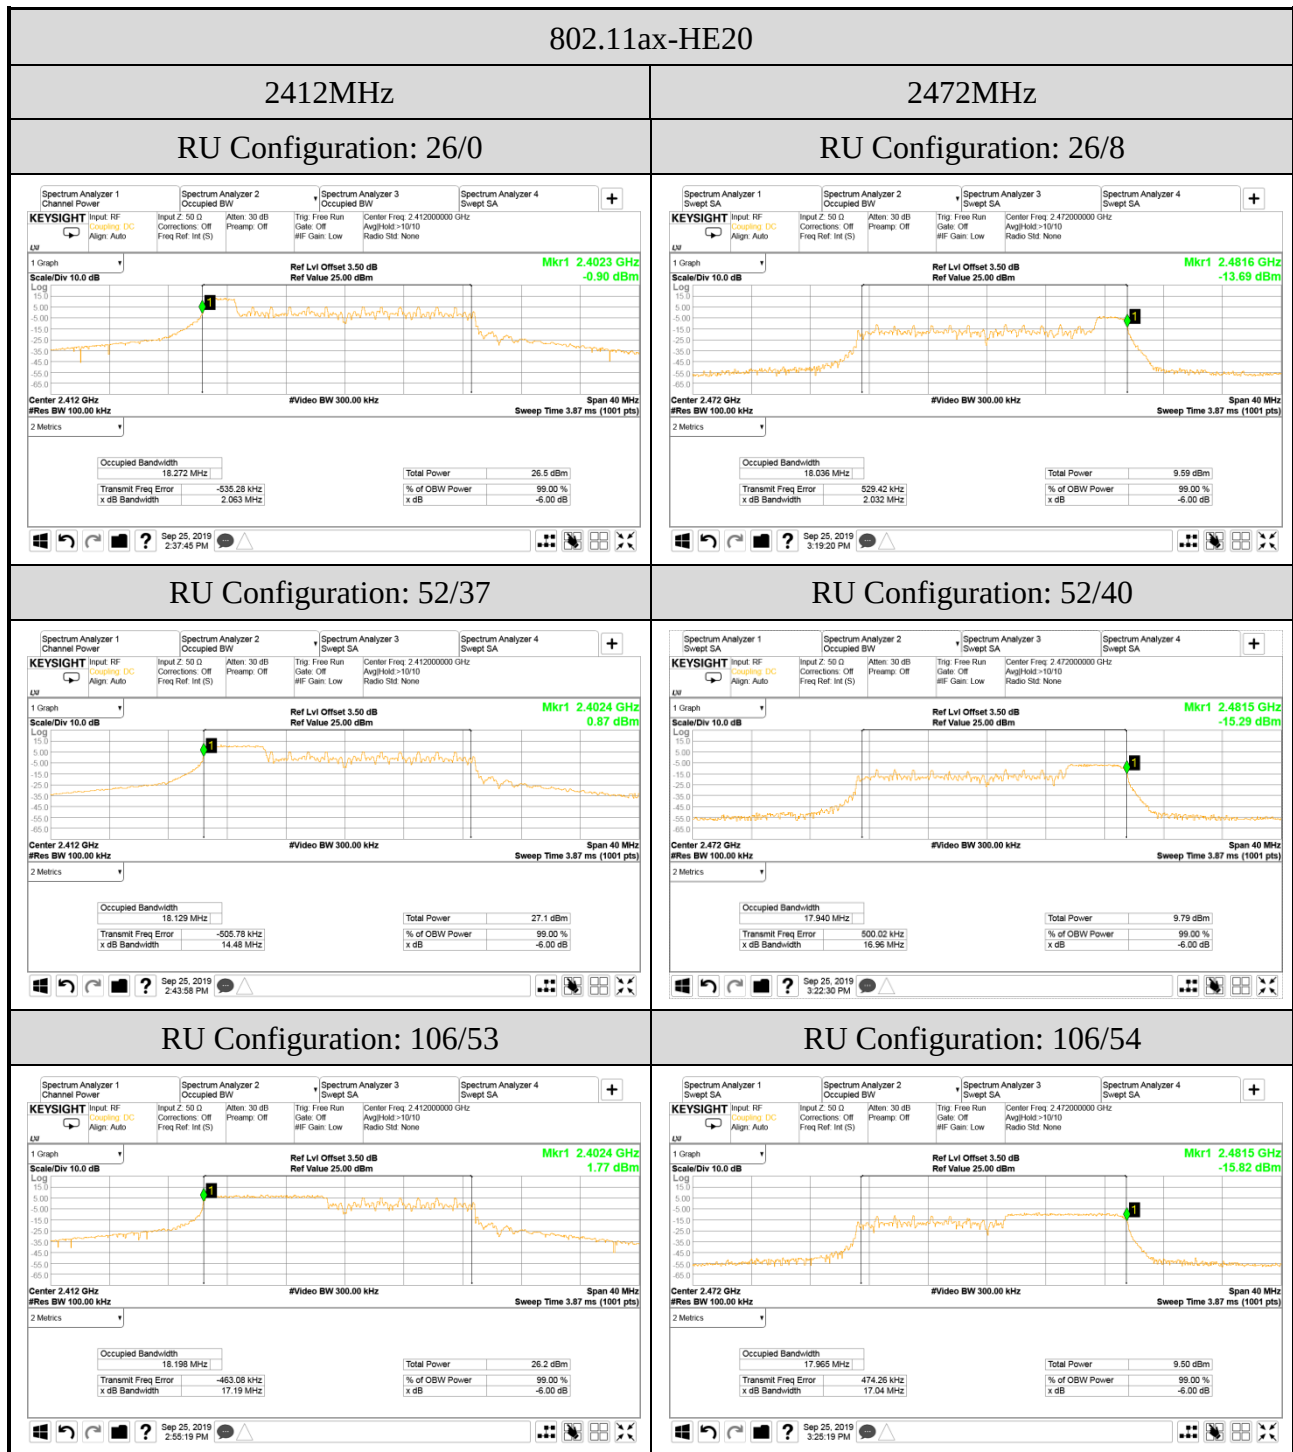

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

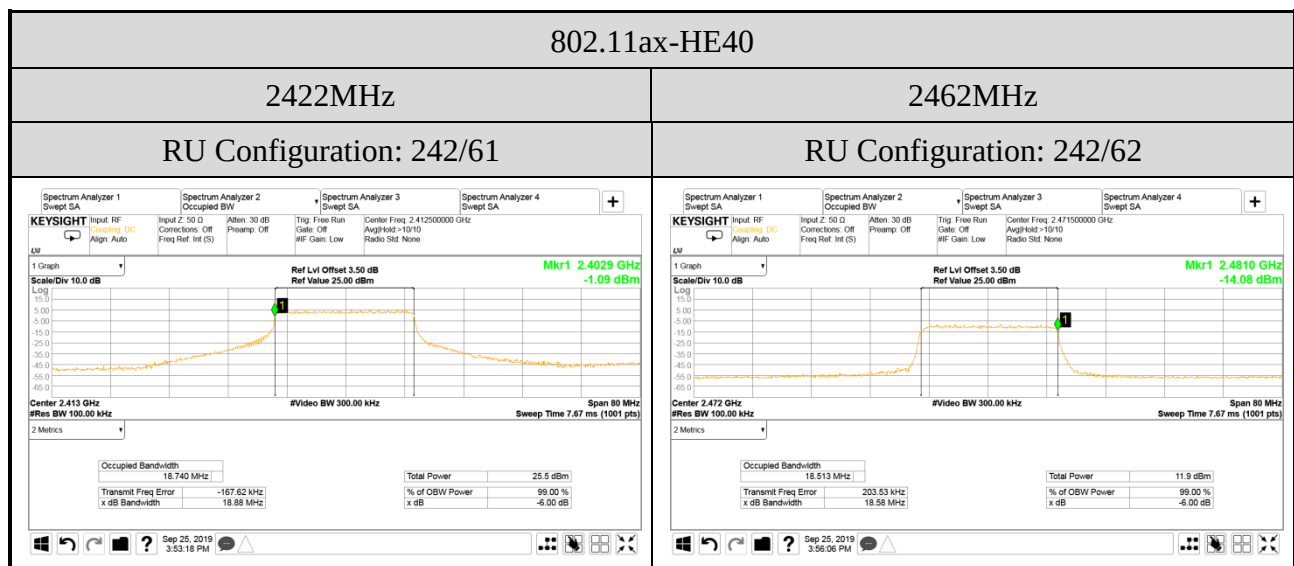

**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

