

WA-P-LELE-04-003 Specification

1. Explanation of part number :

WA - P - LELE - 04 - 003
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) PCB: PCB

(3) Frequency : 2400~2500MHz&5100~5800MHz&5925~7125MHz

(4) Coaxial Cable Type : With ϕ 0.81 Main Black (178.4) / AUX Gray (256.4mm)

(5) Suffix : 003

2. Storage Condition:

Temperature -40 to +70℃
Humidity 20 to 65 %RH

3. Operating Condition:

Temperature -40 to +70℃
Humidity 10 to 85 %RH

4. Electrical Specification :

Those specifications were specially defined for LG 17Z90P WIFI model, and all characteristics were measured under the model's handset testing jig .

4-1. Frequency Band:

Frequency Band	MHz
WIFI\BT	2400~2500 & 5100~5800 & 5925~7125

UNLESS OTHER SPECIFIED TOLERANCES ON : X = $\pm$ X.X = $\pm$ X.XX = $\pm$ ANGLES = $\pm$ HOLEDIA = $\pm$		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 黄江	CHECKED BY: 林娟		
DESIGNED BY : 胡志清	APPROVED BY : 唐龙		
TITLE : WA-P-LELE-04-003 Specification		DOCUMENT NO.	PAGE REV. P0

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. VSWR

4-4.1 Measuring Method

1.A 50Ωcoaxial cable is connected to the antenna. Then this cable is connected

to a network analyzer to measure the VSWR

2.Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and VSWR value

VSWR	Frequency (Unit MHz)	Spec	1
Main Antenna	2400	≤ 3.5	1.8
	2500	≤ 3.5	1.6
	5000	≤ 3.5	1.2
	6000	≤ 3.5	1.6
	Judgement		ok
Aux Antenna	2400	≤ 3.5	2.7
	2500	≤ 4.0	3.2
	5000	≤ 4.0	1.2
	6000	≤ 4.0	1.6
	Judgement		ok

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = $\pm$ X.X = $\pm$ X.XX = $\pm$

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE : UNIT : mm

DRAWN BY: 黄江 CHECKED BY: 林娟

DESIGNED BY: 胡志清 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-003 Specification




佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
P0

Main Antenna-1

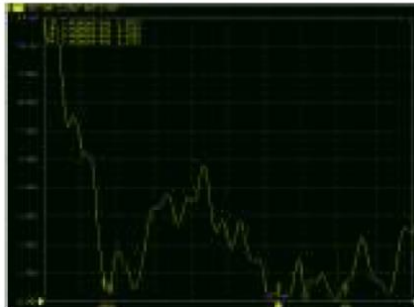

AUX Antenna-1




4-5. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

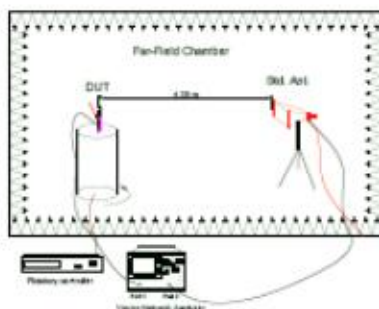

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = $\pm$ X.X = $\pm$ X.XX = $\pm$

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE : UNIT : mm

DRAWN BY: 黄江 CHECKED BY: 林娟

DESIGNED BY: 胡志清 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-003 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
P0

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

4-5.3 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

4-5-3-1 Electrical specification

Frequency (MHz)	Average Efficiency (%)
2400~2500	>30
5100~5825	>30

4-5.3-2 Efficiency and Gain Test Data

Frequency	Main Antenna-1		
	Efficiency	Average Gain	Peak Gain
2400MHz	45.9 %	-3.4 dBi	4.0 dBi
2425MHz	55.6 %	-2.6 dBi	5.2 dBi
2450MHz	43.3 %	-3.6 dBi	4.5 dBi
2475MHz	48.2 %	-3.2 dBi	4.8 dBi
2500MHz	50.1 %	-3.0 dBi	5.2 dBi
5150MHz	41.6 %	-3.8 dBi	2.9 dBi
5250MHz	42.1 %	-3.8 dBi	3.8 dBi
5350MHz	38.4 %	-4.2 dBi	0.5 dBi
5725MHz	44.5 %	-3.5 dBi	2.4 dBi
5825MHz	48.3 %	-3.2 dBi	2.7 dBi

Frequency	AUX Antenna-1		
	Efficiency	Average Gain	Peak Gain
2400MHz	41.0 %	-3.9 dBi	4.2 dBi
2425MHz	56.7 %	-2.5 dBi	5.8 dBi
2450MHz	51.0 %	-2.9 dBi	6.4 dBi
2475MHz	55.7 %	-2.5 dBi	6.1 dBi
2500MHz	61.4 %	-2.1 dBi	6.8 dBi
5150MHz	36.5 %	-4.4 dBi	2.9 dBi
5250MHz	41.3 %	-3.8 dBi	3.8 dBi
5350MHz	39.7 %	-4.0 dBi	0.5 dBi
5725MHz	45.0 %	-3.5 dBi	2.4 dBi
5825MHz	47.4 %	-3.2 dBi	2.7 dBi

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ± X.XX = ±

ANGLES = ± HOLEDIA = ±

SCALE : UNIT : mm

DRAWN BY: 黄江 CHECKED BY: 林娟

DESIGNED BY: 胡志清 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-003 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.


PAGE REV.
P0

4-5.3-3 Antenna 3D Radiation Pattern

Main Antenna-1

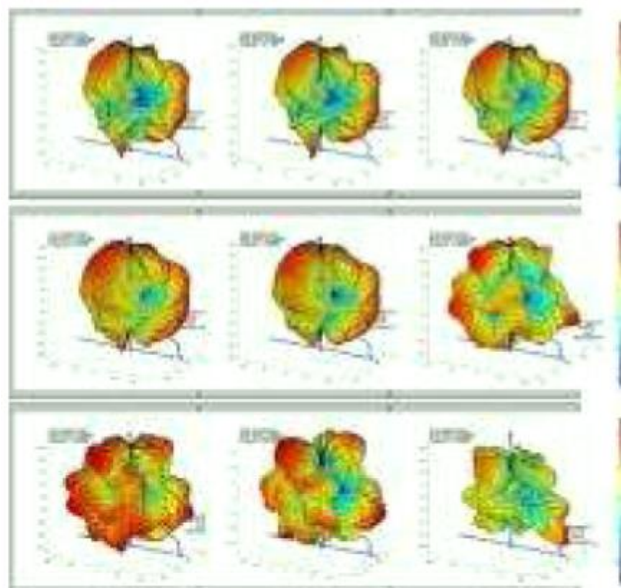

AUX Antenna-1

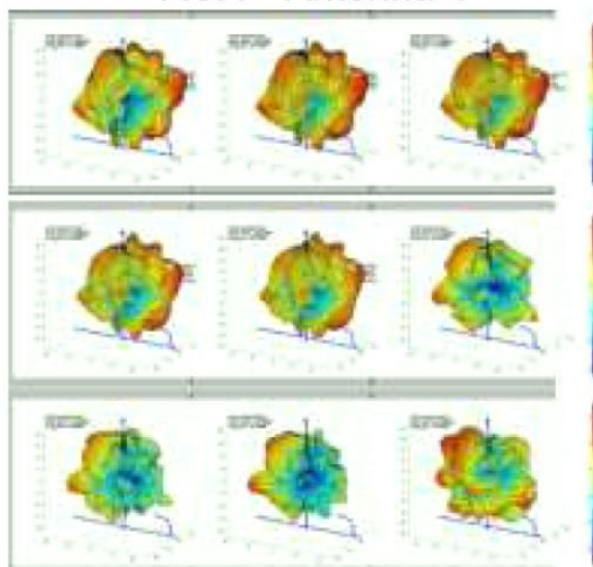

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ± X.XX = ±

ANGLES = ± HOLEDIA = ±

SCALE : UNIT : mm

DRAWN BY: 黄江 CHECKED BY: 林娟

DESIGNED BY: 胡志清 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-003 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.


PAGE REV.
P0

5. Mechanical Specification:


Connector: I-PEX MHF 4; 20611; Cable: RF Cable 0.81 (Main Black/Aux Gray)

Cable length: Main Antenna L: $172.6 \pm 2\text{mm}$ (Include connector)

Aux Antenna L: $251.8 \pm 2\text{mm}$ (Include connector)

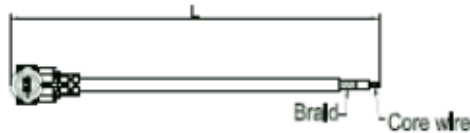

Mechanical Configuration: (* dimension is important dimension)

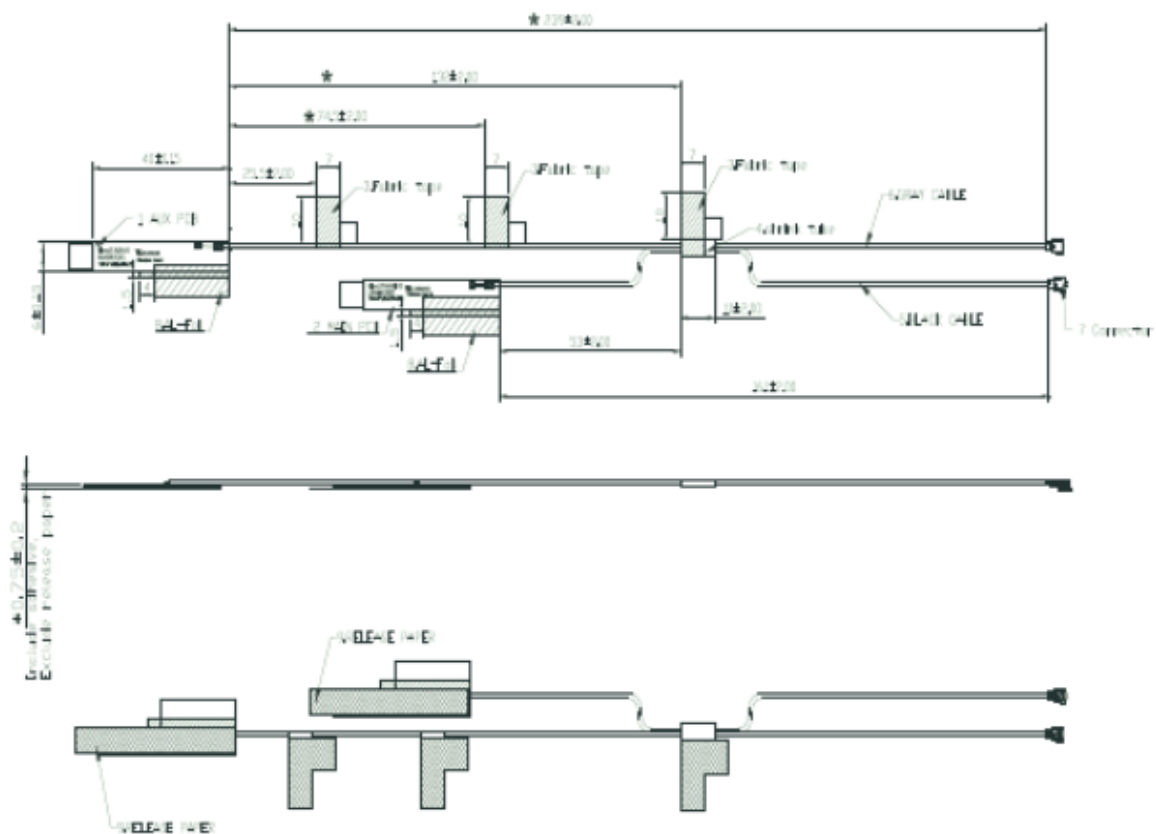

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ± X.XX = ±

ANGLES = ± HOLEDIA = ±

SCALE : UNIT : mm

DRAWN BY: 黄江 CHECKED BY: 林娟

DESIGNED BY: 胡志清 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-003 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
P0

Material list :

Item	Description	Material	Quantity
1	PCB AUX	FR4 40x7mm,T0.6mm	1
2	PCB MAIN	FR4 40x7mm,T0.6mm	1
3	Conductive Tape	Conductive Tape 21x7mm, T0.12mm	3
4	Shrink Tube	Shrink Tube black, ϕ 1.5 x15mm	1
5	Cable black	Cable 0.81 black	1
6	Cable gray	Cable 0.81 gray	1
7	Connector	I-PEX MHF 4 for 0.81, 20611	2
8	AL-Foil	AL Foil ,10x15.7mm, T0.09	2
9	PCB TAPE	G9000 39.4x6.4mm, T0.15	2

6. UL File No:

ITEM	DESCRIPTION	SUPPLIER	UL File No
1	PCB	M00590	E495648
2	CABLE	M00018	E318898
		M00186	E464731

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = $\pm$ X.X = $\pm$ X.XX = $\pm$

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE : UNIT : mm

DRAWN BY: 黄江 CHECKED BY: 林娟

DESIGNED BY: 胡志清 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-003 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
P0