


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

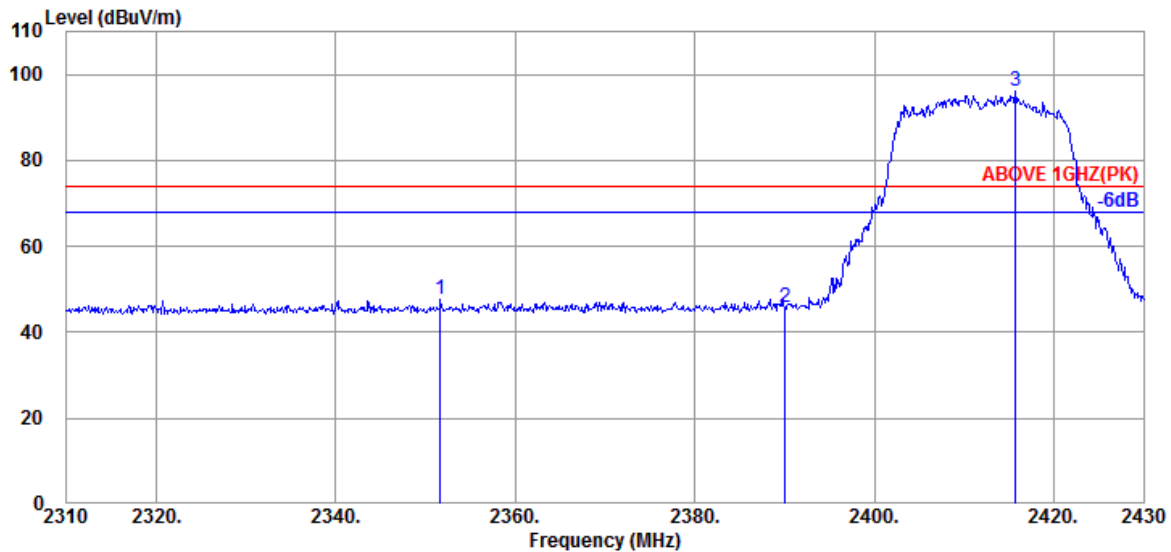

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2351.640	28.20	5.65	39.91	53.65	47.59	74.00	26.41	Peak
2390.040	28.27	5.70	39.91	51.67	45.73	74.00	28.27	Peak
@ 2415.720	28.39	5.73	39.91	101.96	96.17	---	---	Peak

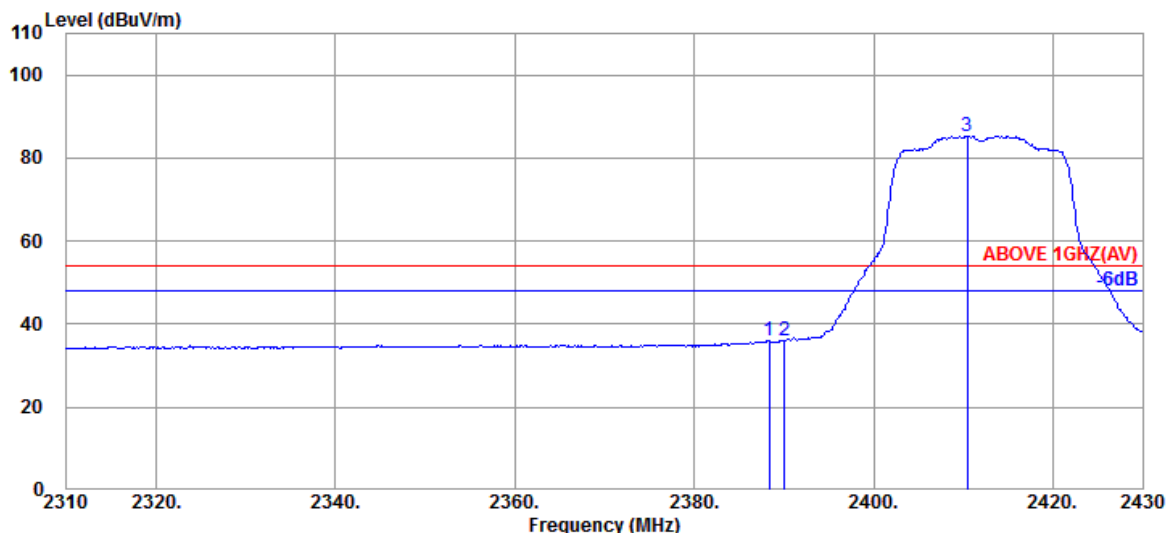

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.360	28.27	5.70	39.91	41.95	36.01	54.00	17.99	Average
2390.040	28.27	5.70	39.91	42.09	36.15	54.00	17.85	Average
@ 2410.440	28.34	5.73	39.91	91.07	85.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

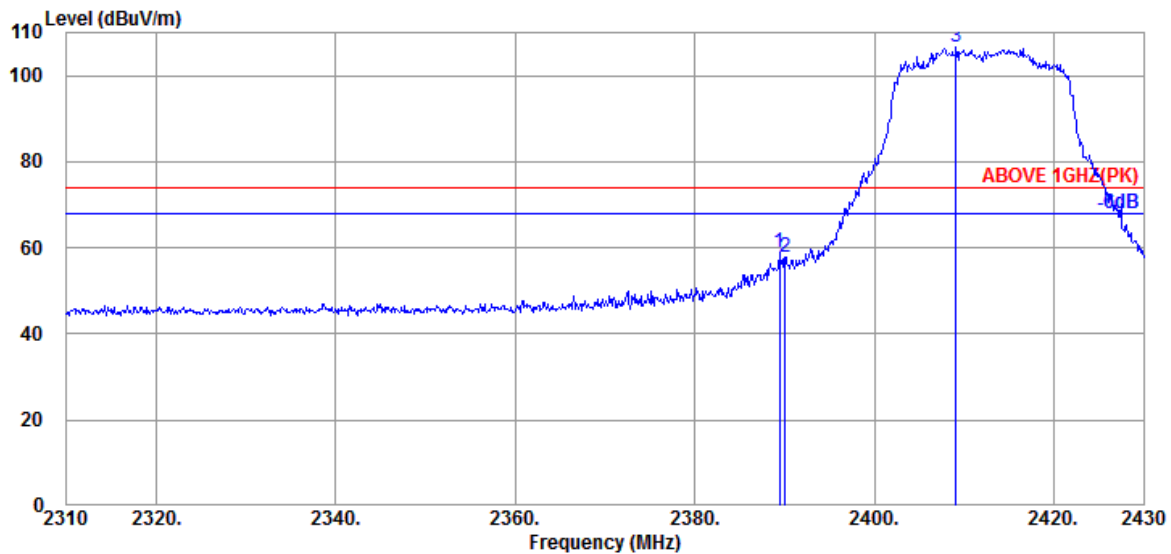

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	5.70	39.91	65.07	59.13	74.00	14.87	Peak
2390.040	28.27	5.70	39.91	63.90	57.96	74.00	16.04	Peak
@ 2409.120	28.34	5.73	39.91	112.57	106.73	---	---	Peak

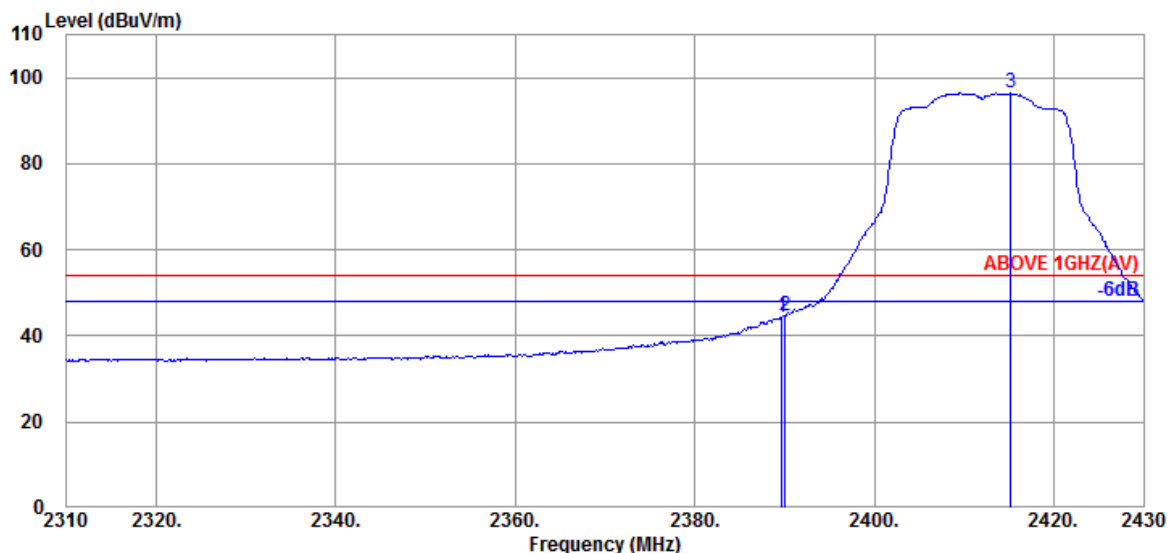

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.70	39.91	50.29	44.35	54.00	9.65	Average
2390.040	28.27	5.70	39.91	50.72	44.78	54.00	9.22	Average
@ 2415.240	28.39	5.73	39.91	102.17	96.38	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

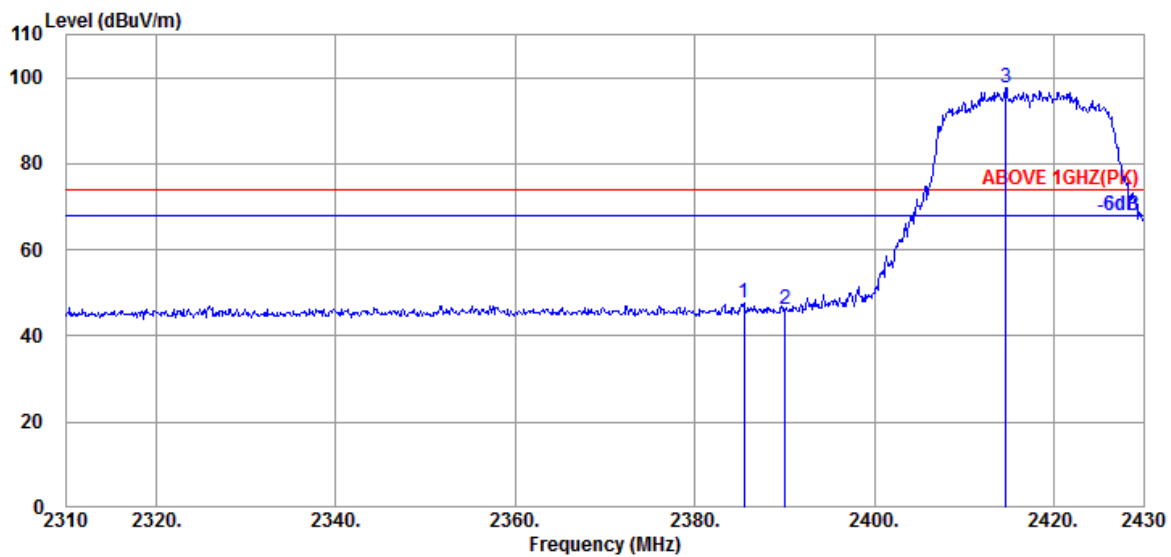

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.480	28.27	5.68	39.91	53.53	47.57	74.00	26.43	Peak
2390.040	28.27	5.70	39.91	52.07	46.13	74.00	27.87	Peak
@ 2414.640	28.39	5.73	39.91	103.56	97.77	---	---	Peak

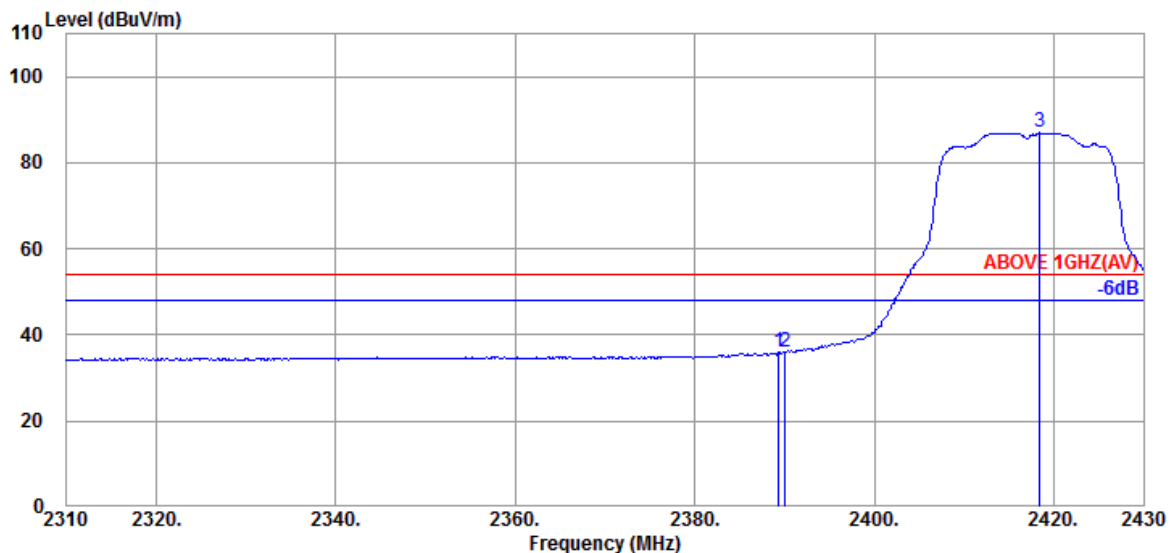

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.27	5.70	39.91	41.87	35.93	54.00	18.07	Average
2390.040	28.27	5.70	39.91	42.15	36.21	54.00	17.79	Average
@ 2418.480	28.43	5.73	39.91	92.74	86.99	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

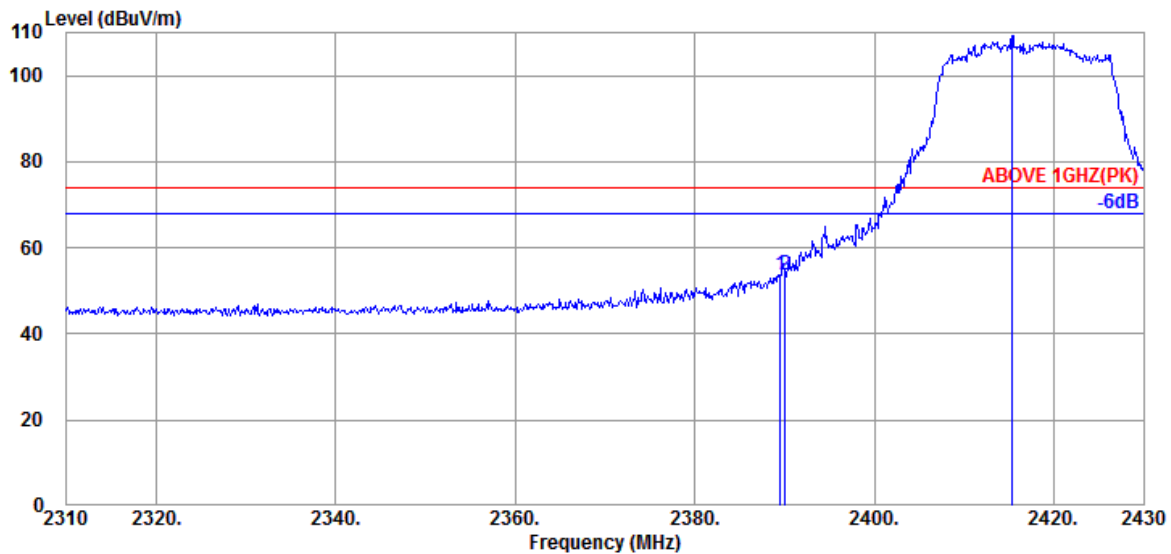

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	5.70	39.91	59.78	53.84	74.00	20.16	Peak
2390.040	28.27	5.70	39.91	59.53	53.59	74.00	20.41	Peak
@ 2415.360	28.39	5.73	39.91	115.07	109.28	---	---	Peak

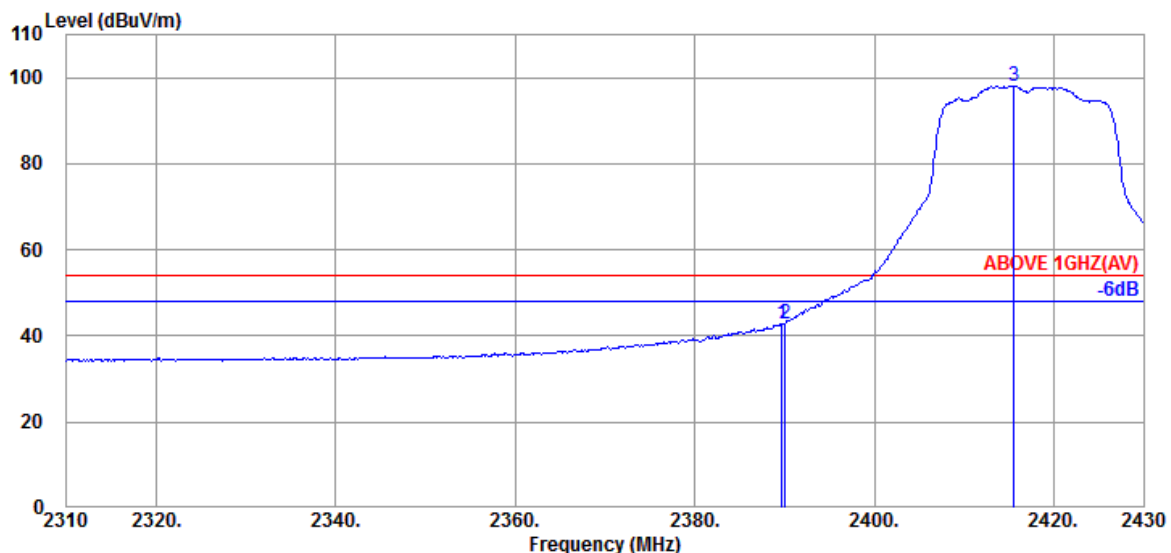

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.70	39.91	48.63	42.69	54.00	11.31	Average
2390.040	28.27	5.70	39.91	48.72	42.78	54.00	11.22	Average
@ 2415.600	28.39	5.73	39.91	103.83	98.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

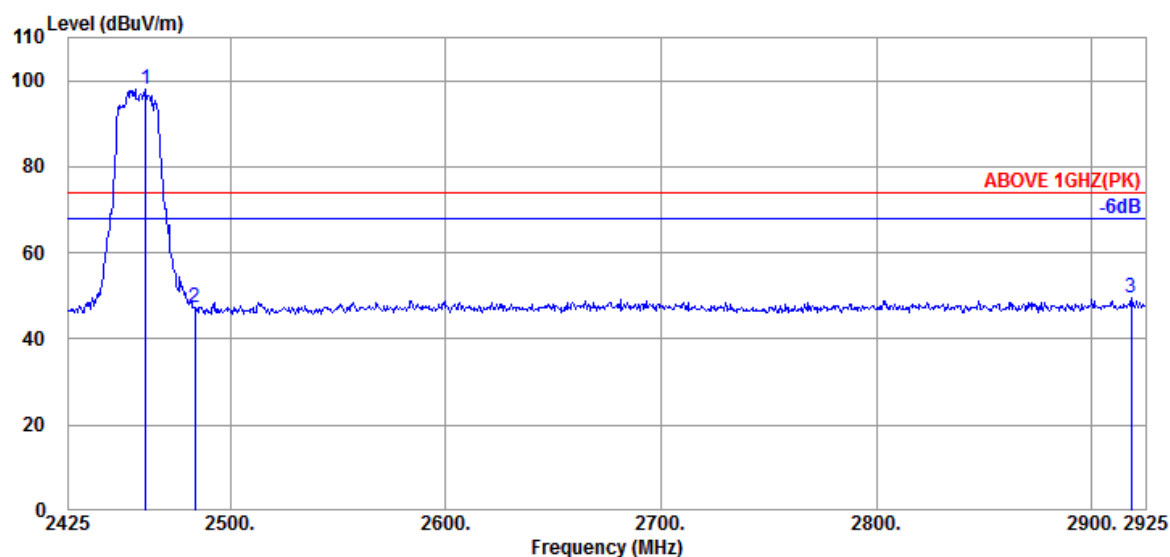

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	28.60	5.81	39.91	103.64	98.14	---	---	Peak
2483.500	28.60	5.83	39.91	52.94	47.46	74.00	26.54	Peak
2918.500	29.75	6.38	40.01	53.38	49.50	74.00	24.50	Peak

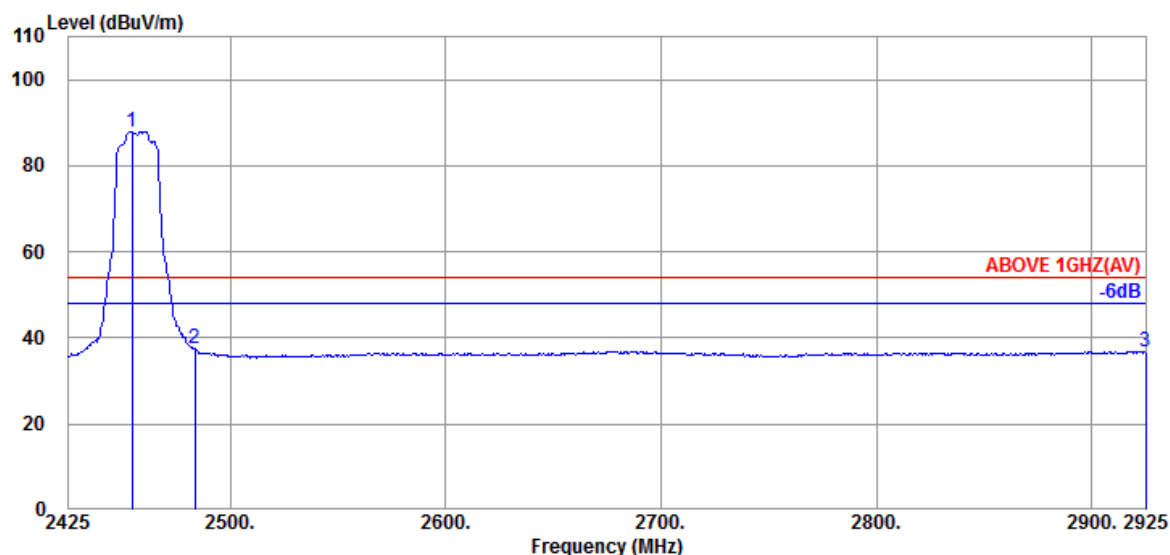

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.500	28.60	5.81	39.91	93.46	87.96	---	---	Average
2483.500	28.60	5.83	39.91	42.88	37.40	54.00	16.60	Average
2925.000	29.75	6.38	40.01	40.83	36.95	54.00	17.05	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

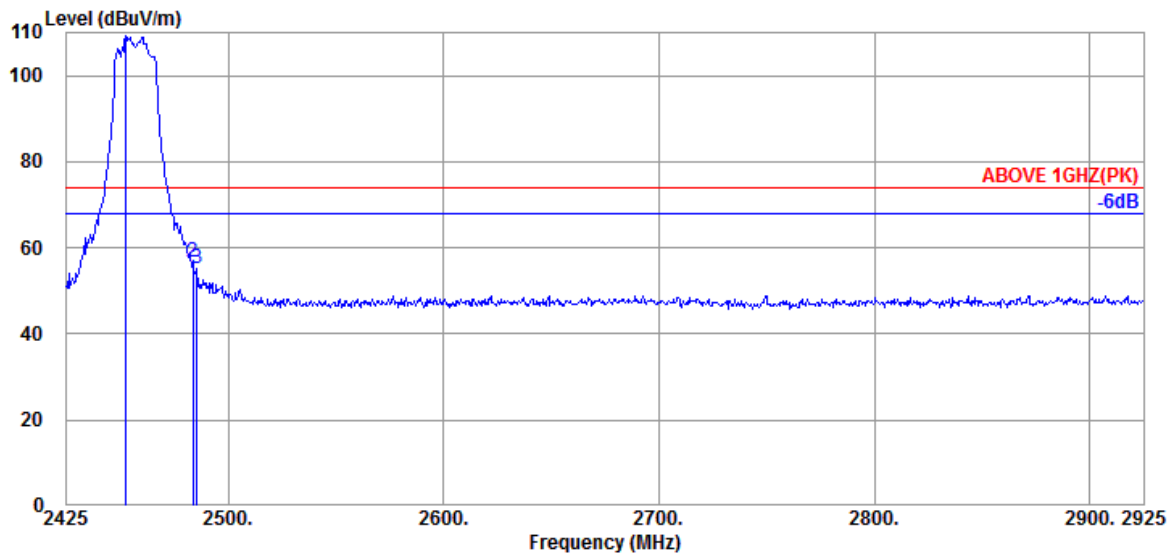

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2452.500	28.60	5.78	39.91	114.73	109.20	---	---	Peak
2483.500	28.60	5.83	39.91	62.34	56.86	74.00	17.14	Peak
2485.500	28.60	5.83	39.91	60.70	55.22	74.00	18.78	Peak

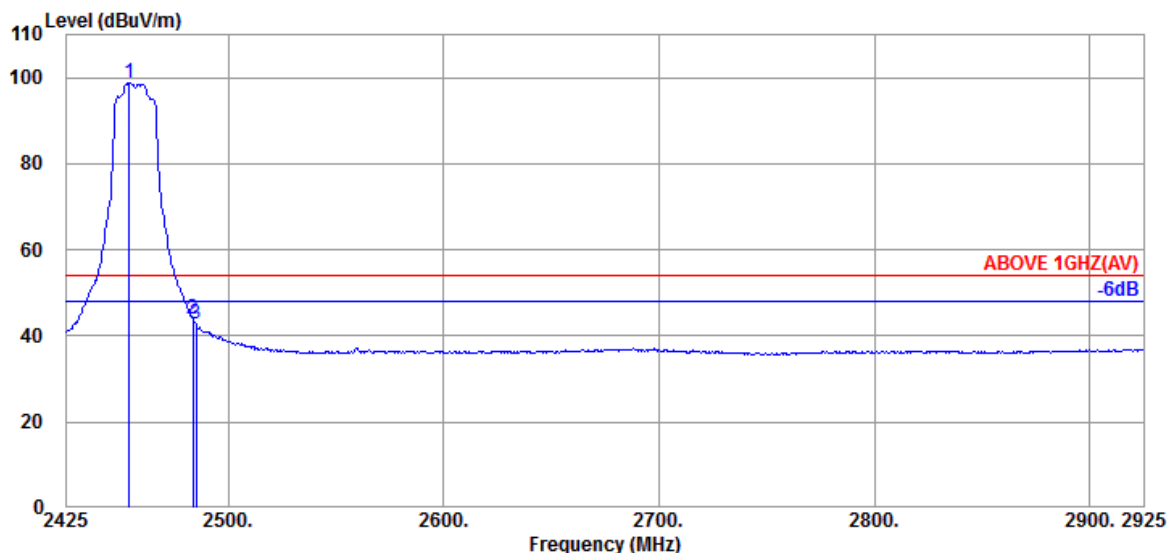

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.000	28.60	5.81	39.91	104.21	98.71	---	---	Average
2483.500	28.60	5.83	39.91	49.43	43.95	54.00	10.05	Average
2485.000	28.60	5.83	39.91	48.12	42.64	54.00	11.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

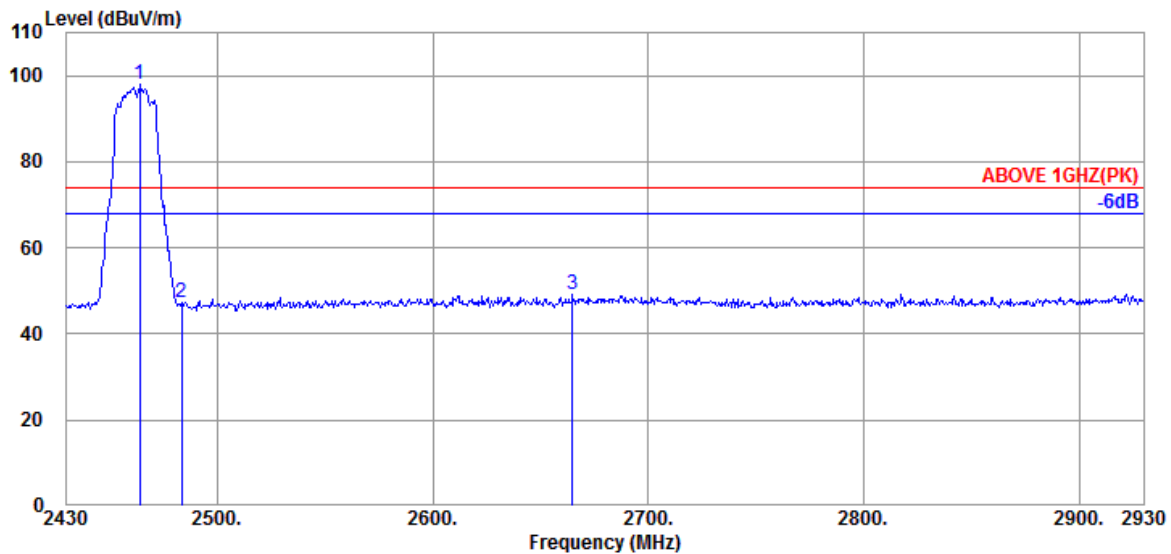

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.60	5.81	39.91	103.54	98.04	---	---	Peak
2483.500	28.60	5.83	39.91	52.76	47.28	74.00	26.72	Peak
2665.000	28.96	6.07	39.95	54.27	49.35	74.00	24.65	Peak

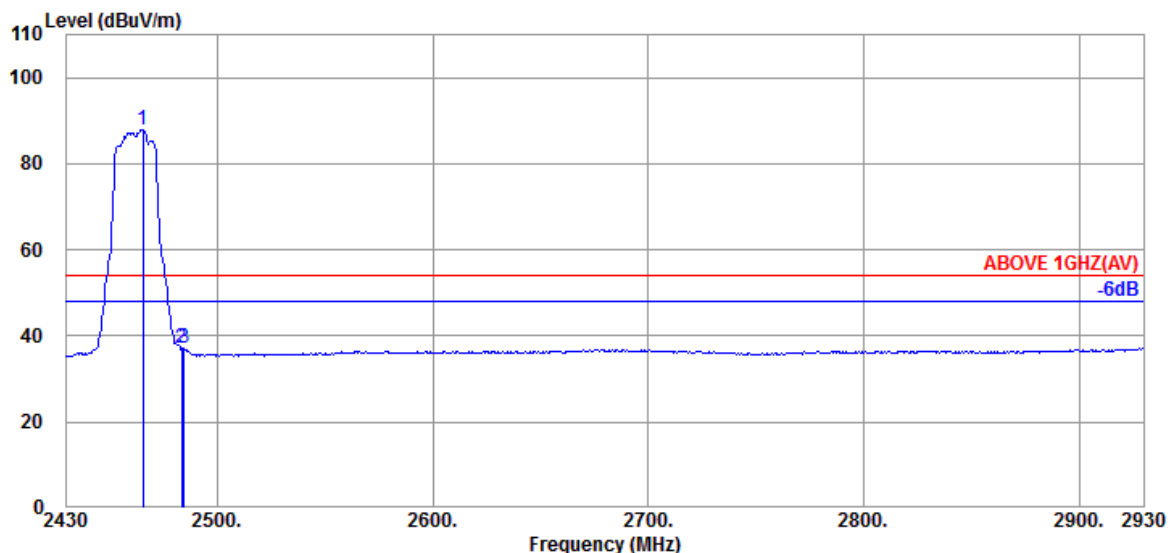

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.60	5.81	39.91	93.24	87.74	---	---	Average
2483.500	28.60	5.83	39.91	42.49	37.01	54.00	16.99	Average
2484.500	28.60	5.83	39.91	42.55	37.07	54.00	16.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

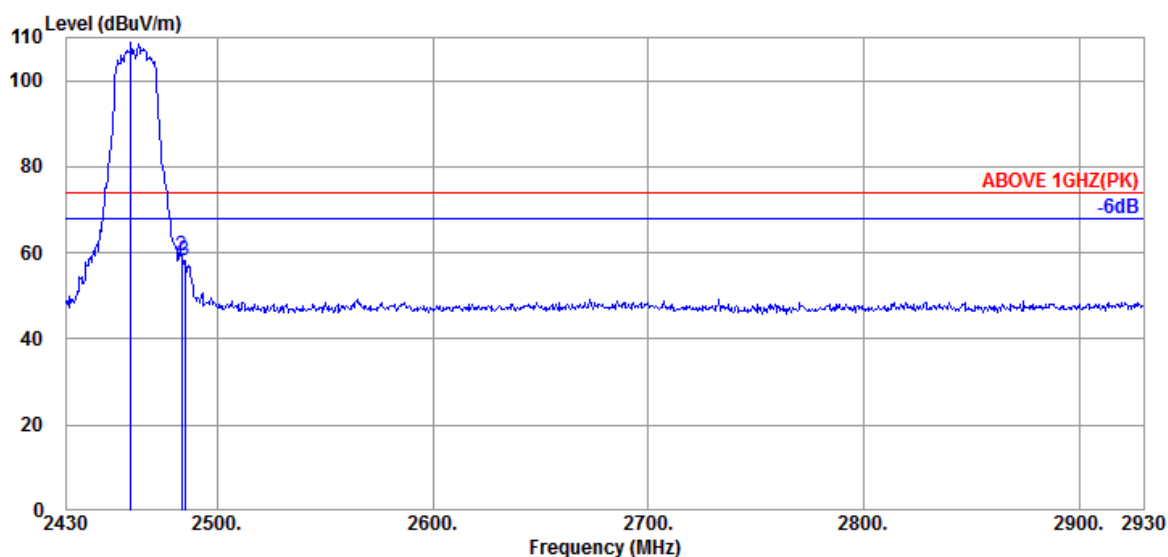

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.000	28.60	5.81	39.91	114.42	108.92	---	---	Peak
2483.500	28.60	5.83	39.91	64.80	59.32	74.00	14.68	Peak
2485.000	28.60	5.83	39.91	63.81	58.33	74.00	15.67	Peak

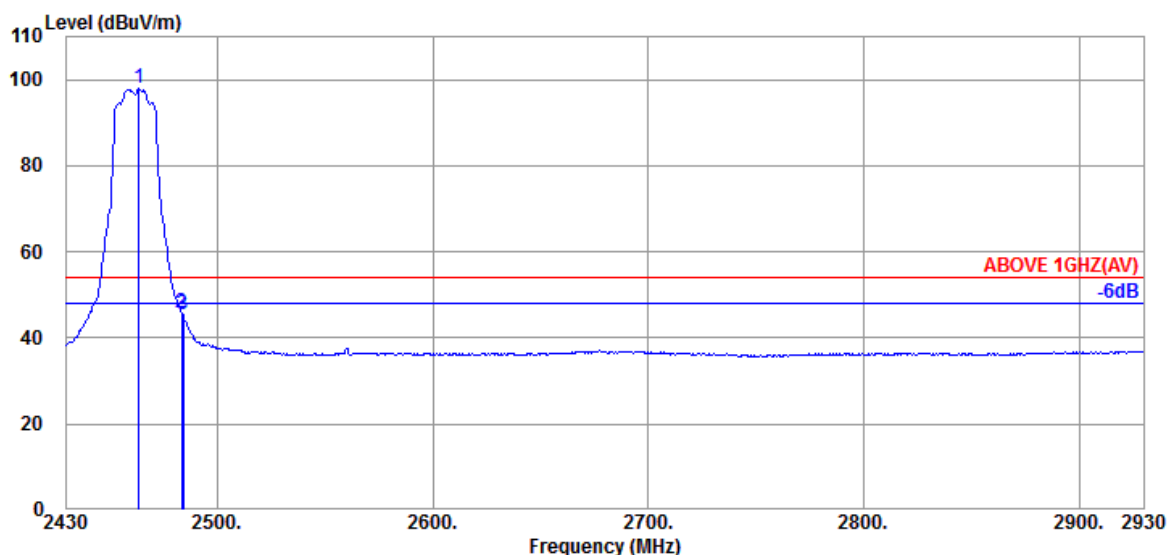

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.500	28.60	5.81	39.91	103.34	97.84	---	---	Average
2483.500	28.60	5.83	39.91	51.27	45.79	54.00	8.21	Average
2484.000	28.60	5.83	39.91	50.74	45.26	54.00	8.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

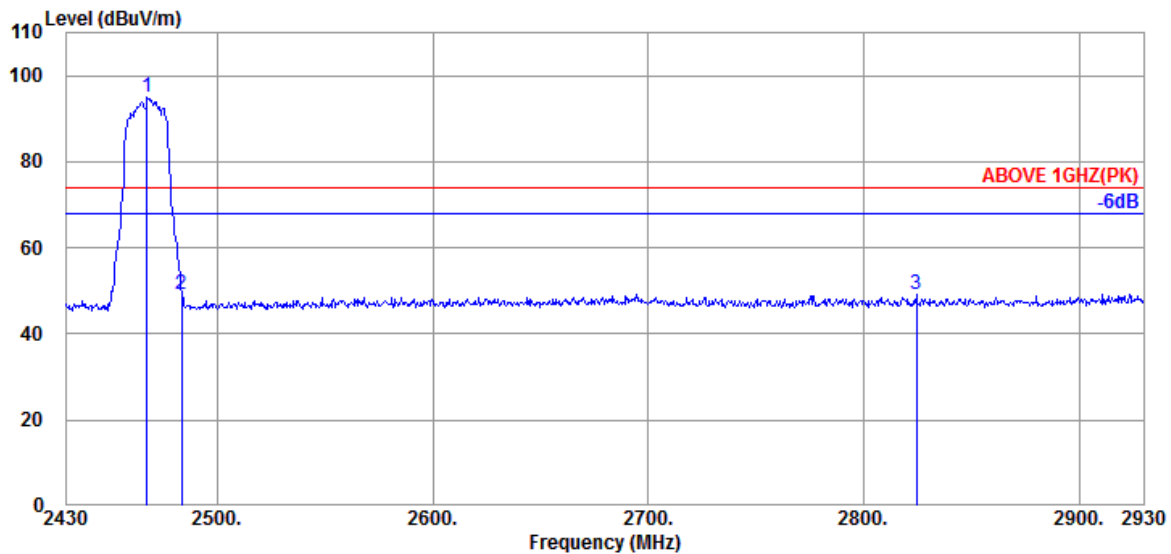

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.500	28.60	5.81	39.91	100.36	94.86	---	---	Peak
2483.500	28.60	5.83	39.91	54.58	49.10	74.00	24.90	Peak
2824.500	29.30	6.26	39.99	53.77	49.34	74.00	24.66	Peak

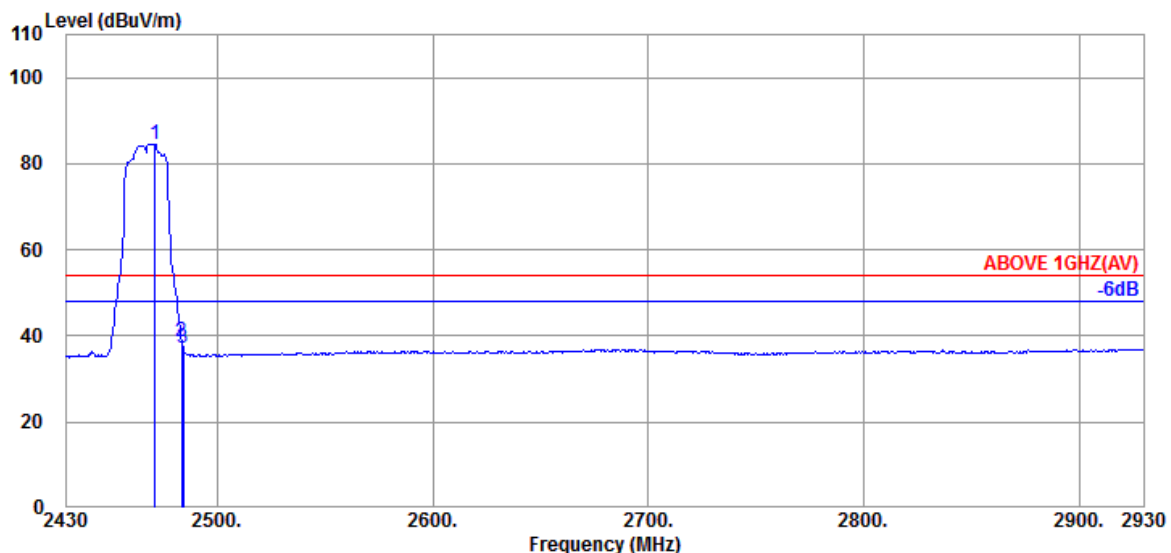

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.000	28.60	5.83	39.91	90.14	84.66	---	---	Average
2483.500	28.60	5.83	39.91	43.99	38.51	54.00	15.49	Average
2484.000	28.60	5.83	39.91	42.76	37.28	54.00	16.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

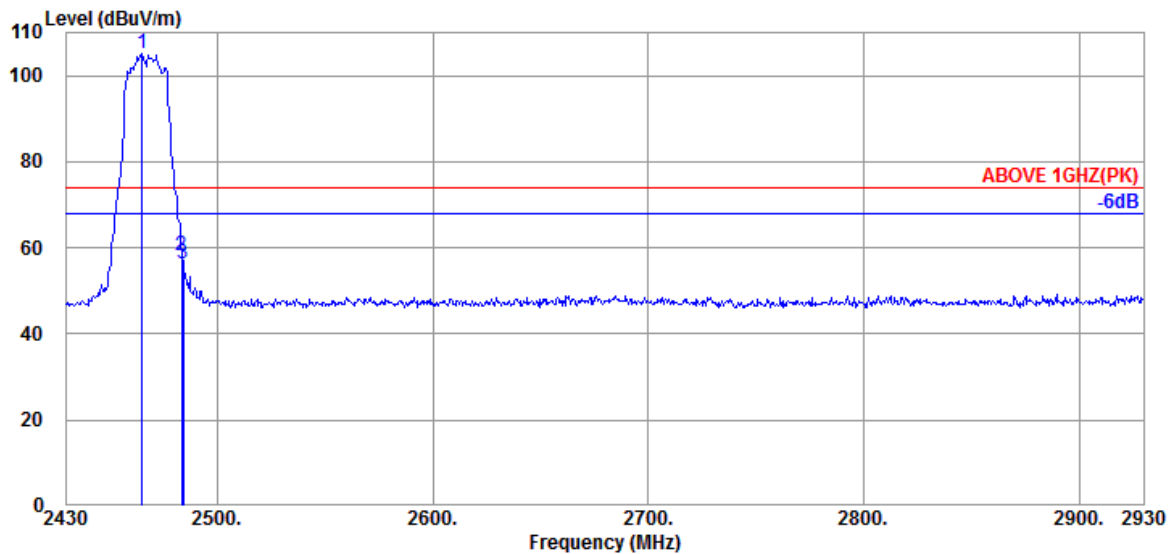

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.60	5.81	39.91	110.66	105.16	---	---	Peak
2483.500	28.60	5.83	39.91	63.56	58.08	74.00	15.92	Peak
2484.000	28.60	5.83	39.91	61.65	56.17	74.00	17.83	Peak

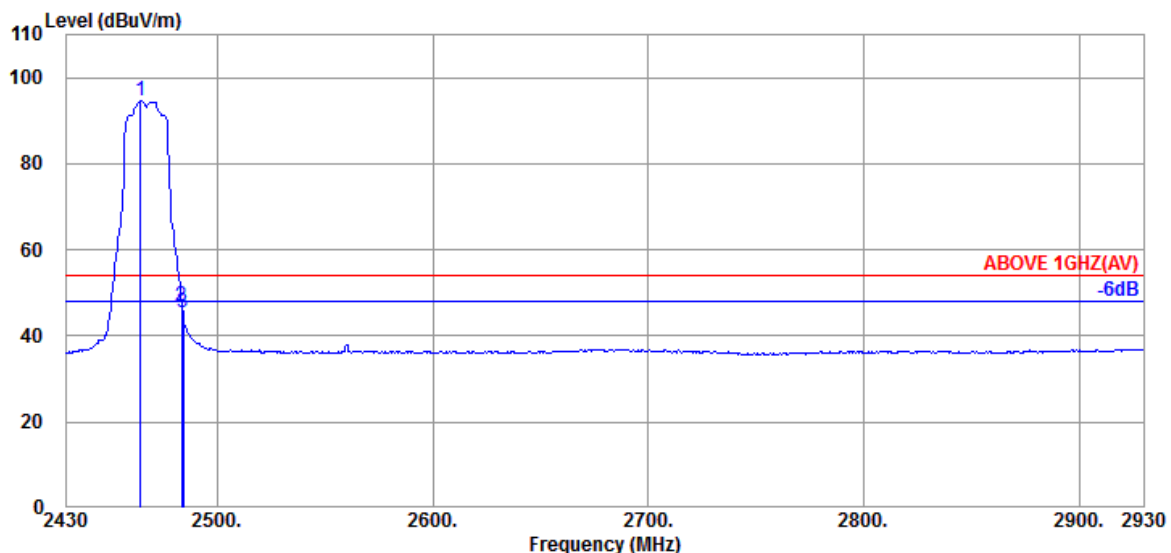

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.60	5.81	39.91	99.98	94.48	---	---	Average
2483.500	28.60	5.83	39.91	52.29	46.81	54.00	7.19	Average
2484.000	28.60	5.83	39.91	51.04	45.56	54.00	8.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

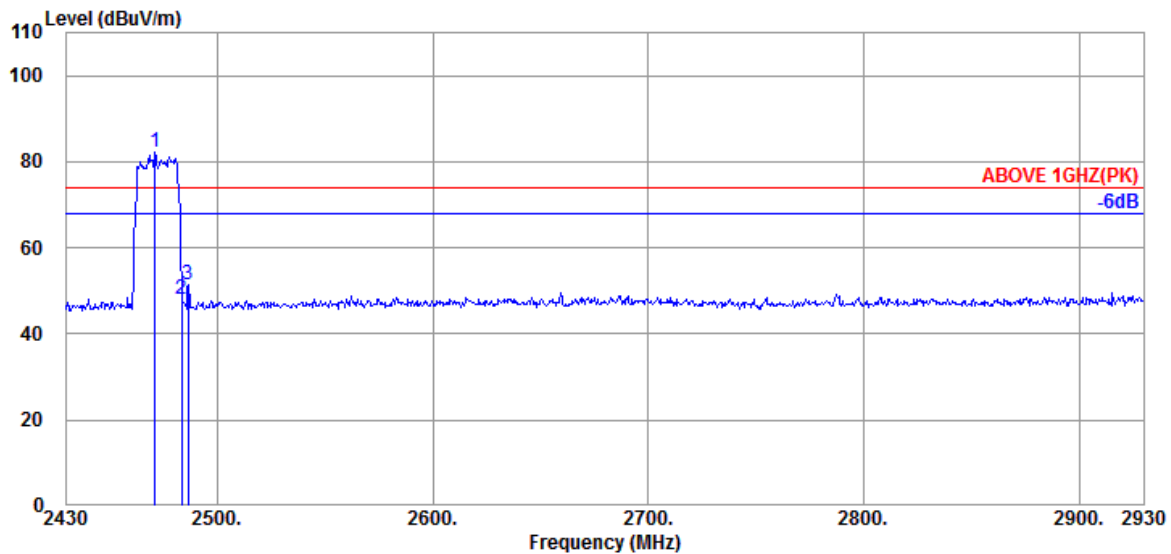

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.000	28.60	5.83	39.91	87.56	82.08	---	---	Peak
2483.500	28.60	5.83	39.91	53.40	47.92	74.00	26.08	Peak
2486.500	28.60	5.83	39.91	56.82	51.34	74.00	22.66	Peak

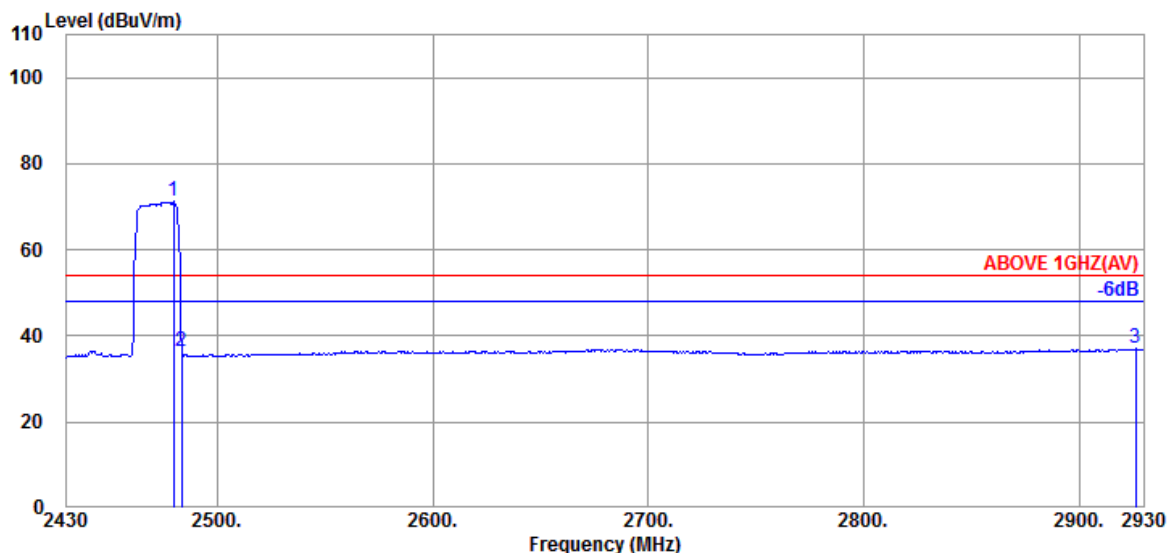

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.500	28.60	5.83	39.91	76.65	71.17	---	---	Average
2483.500	28.60	5.83	39.91	41.89	36.41	54.00	17.59	Average
2926.500	29.80	6.38	40.01	40.92	37.09	54.00	16.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

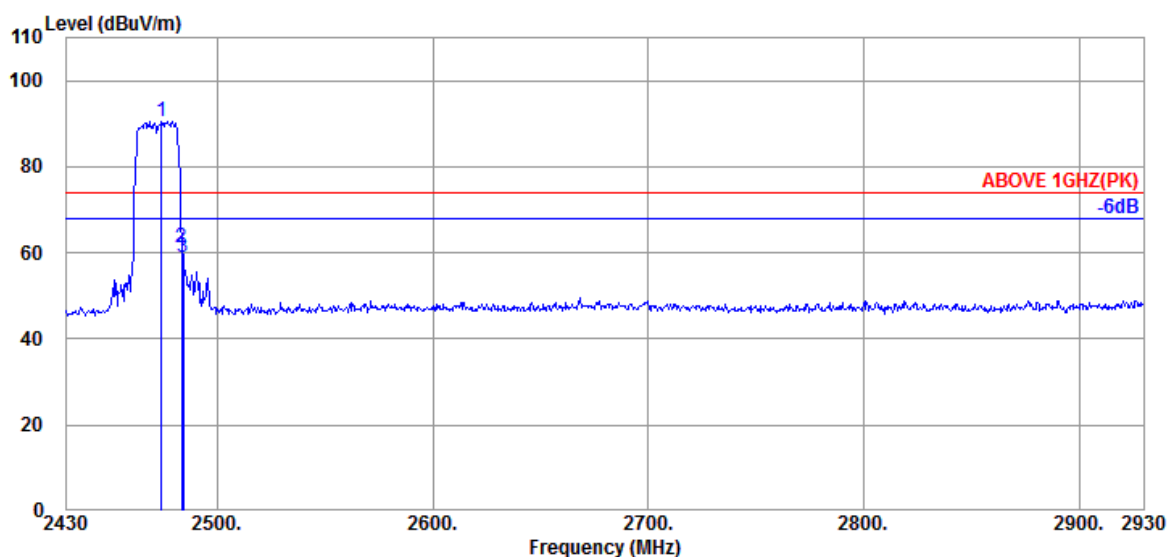

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.000	28.60	5.83	39.91	96.10	90.62	---	---	Peak
2483.500	28.60	5.83	39.91	66.86	61.38	74.00	12.62	Peak
2484.000	28.60	5.83	39.91	64.56	59.08	74.00	14.92	Peak

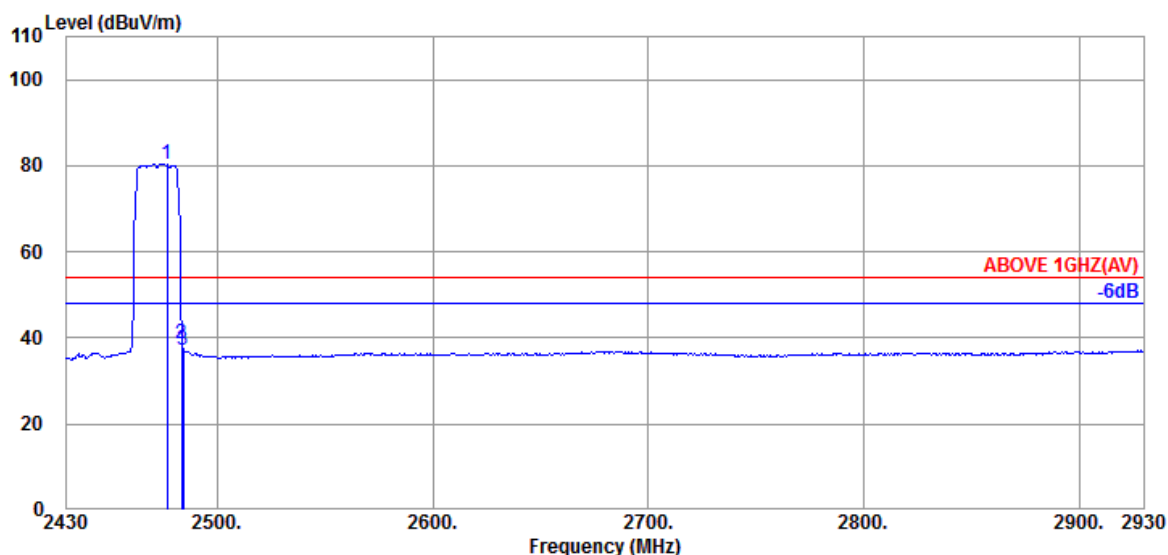

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.500	28.60	5.83	39.91	85.94	80.46	---	---	Average
2483.500	28.60	5.83	39.91	44.17	38.69	54.00	15.31	Average
2484.000	28.60	5.83	39.91	42.72	37.24	54.00	16.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

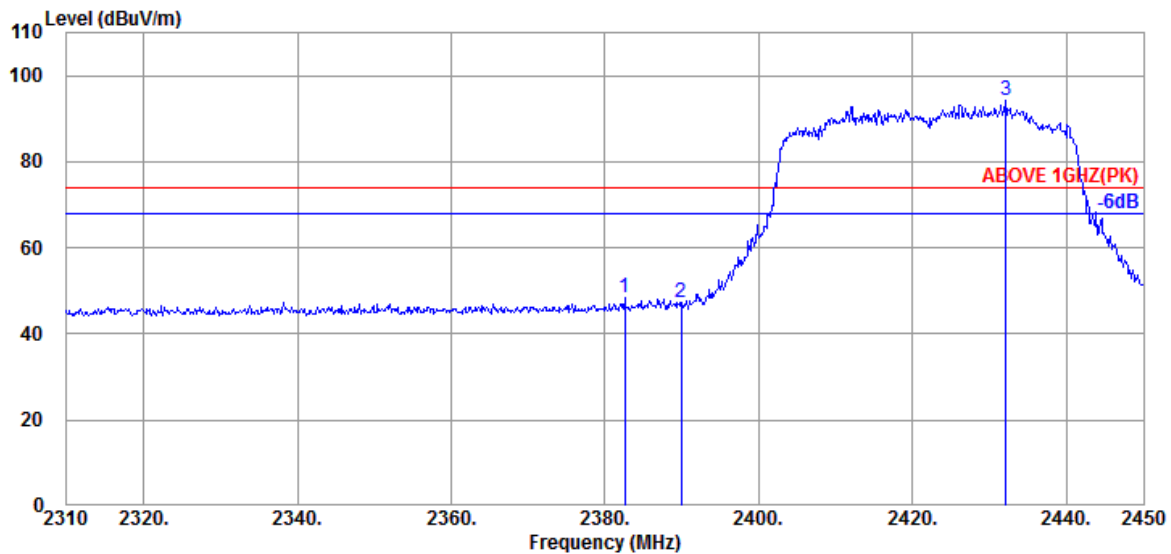

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2382.520	28.26	5.68	39.91	54.24	48.27	74.00	25.73	Peak
2389.940	28.27	5.70	39.91	53.34	47.40	74.00	26.60	Peak
@ 2432.080	28.47	5.76	39.91	99.87	94.19	---	---	Peak

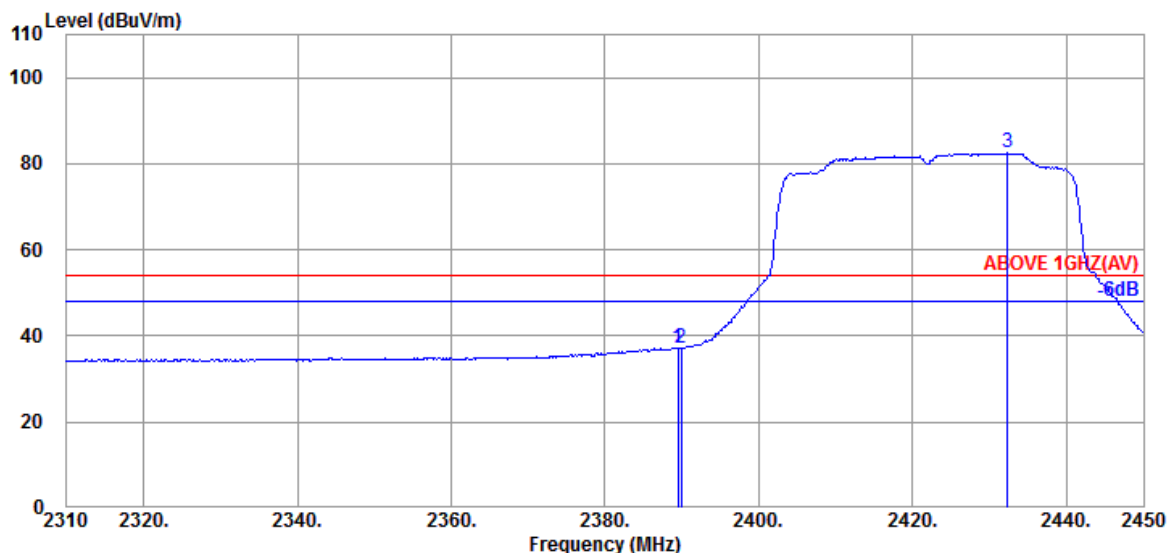

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	43.23	37.29	54.00	16.71	Average
2389.940	28.27	5.70	39.91	42.94	37.00	54.00	17.00	Average
@ 2432.360	28.51	5.76	39.91	88.10	82.46	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

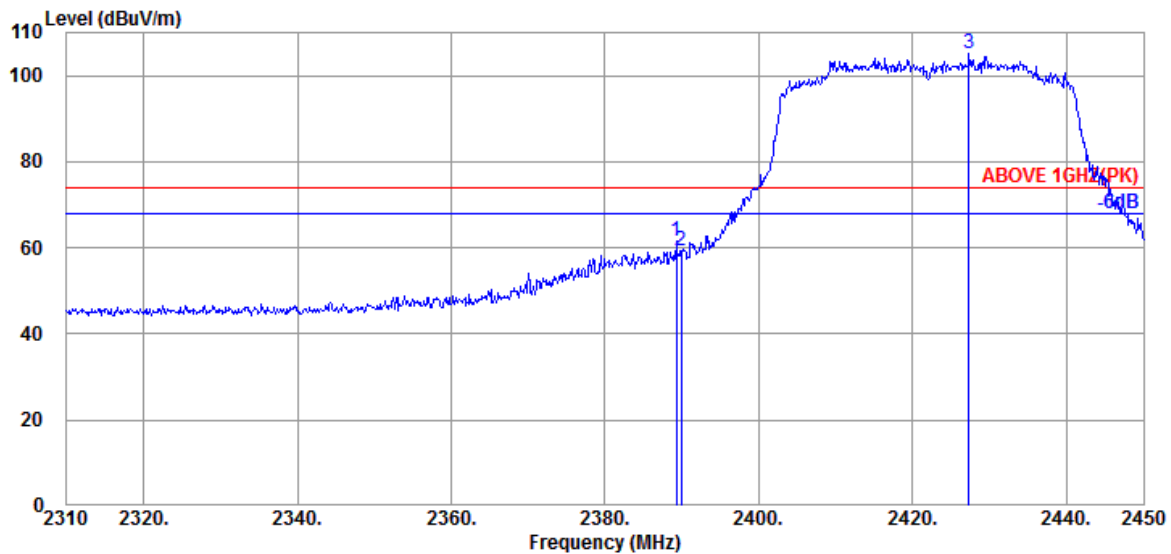

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.240	28.27	5.70	39.91	67.59	61.65	74.00	12.35	Peak
2389.940	28.27	5.70	39.91	65.38	59.44	74.00	14.56	Peak
@ 2427.320	28.47	5.76	39.91	110.77	105.09	---	---	Peak

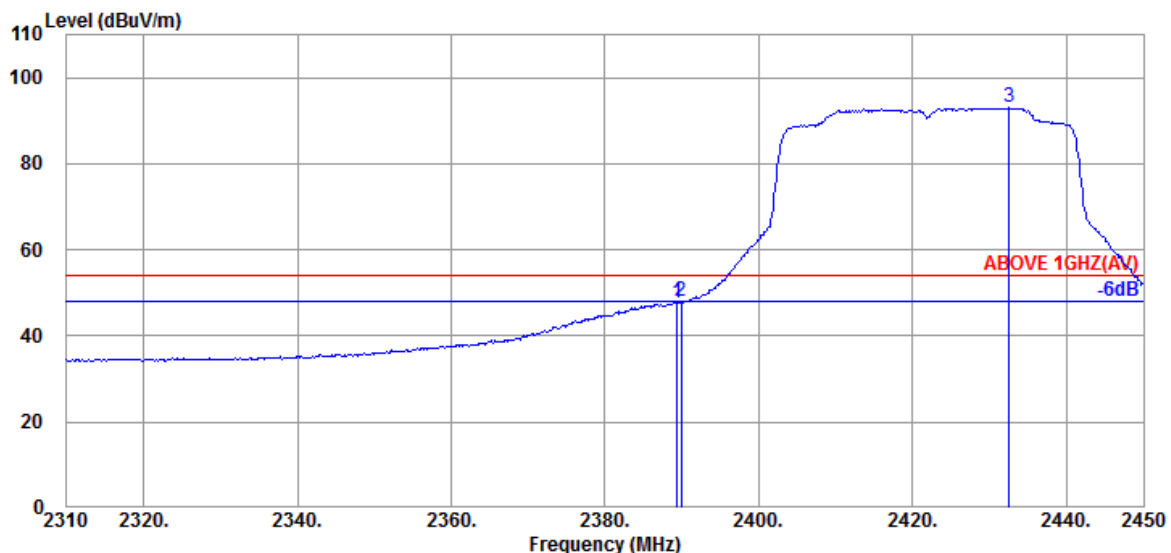

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.380	28.27	5.70	39.91	53.73	47.79	54.00	6.21	Average
2389.940	28.27	5.70	39.91	53.84	47.90	54.00	6.10	Average
@ 2432.500	28.51	5.76	39.91	98.58	92.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

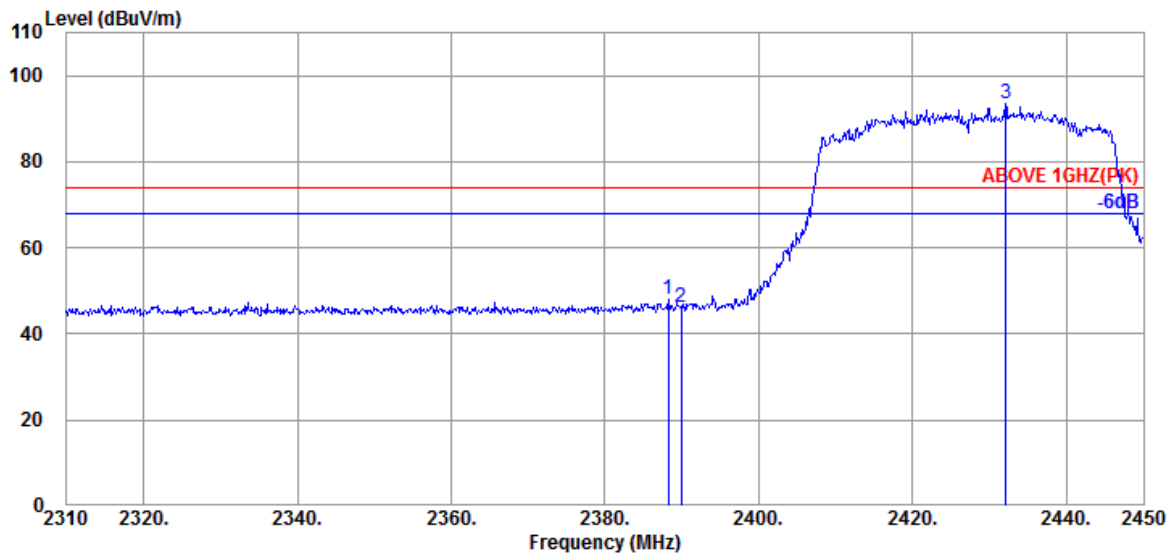

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.260	28.27	5.70	39.91	53.88	47.94	74.00	26.06	Peak
2389.940	28.27	5.70	39.91	52.14	46.20	74.00	27.80	Peak
@ 2432.080	28.47	5.76	39.91	99.17	93.49	---	---	Peak

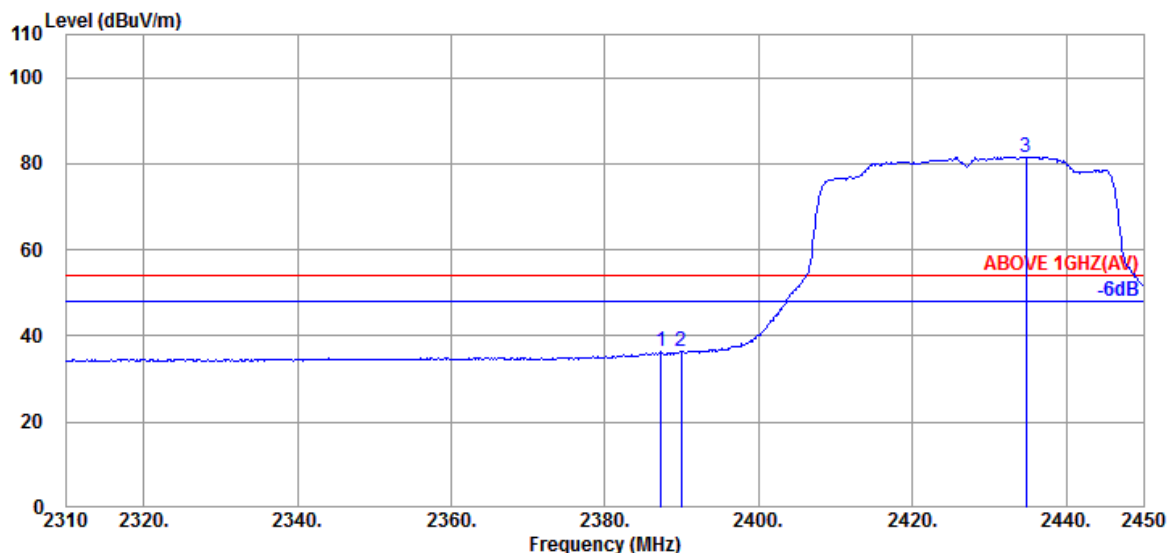

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.280	28.27	5.70	39.91	42.32	36.38	54.00	17.62	Average
2389.940	28.27	5.70	39.91	42.38	36.44	54.00	17.56	Average
@ 2434.740	28.51	5.76	39.91	87.28	81.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

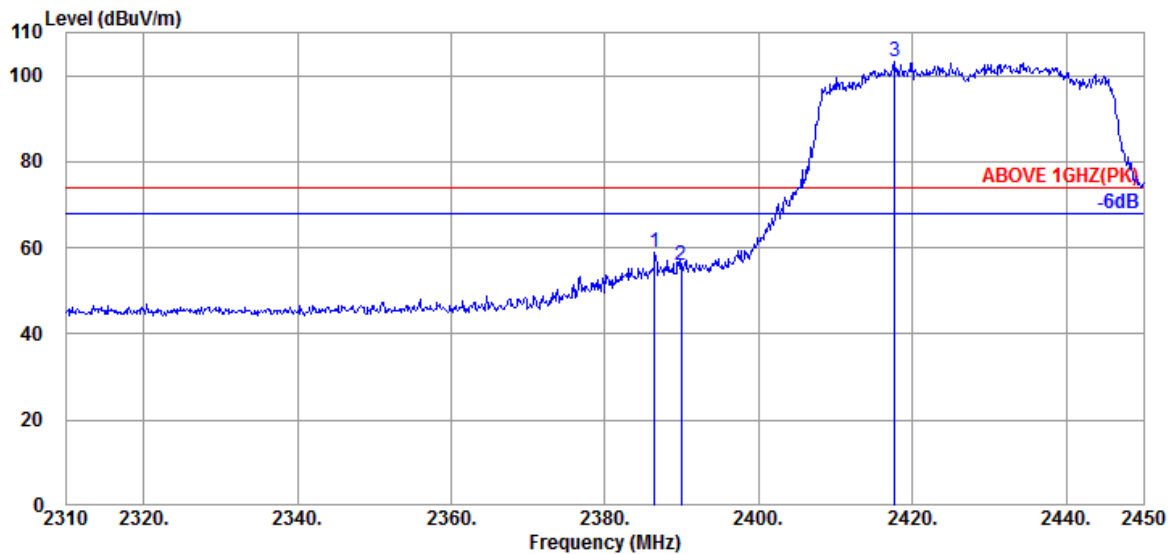

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.440	28.27	5.70	39.91	64.75	58.81	74.00	15.19	Peak
2389.940	28.27	5.70	39.91	61.90	55.96	74.00	18.04	Peak
@ 2417.660	28.39	5.73	39.91	109.16	103.37	---	---	Peak

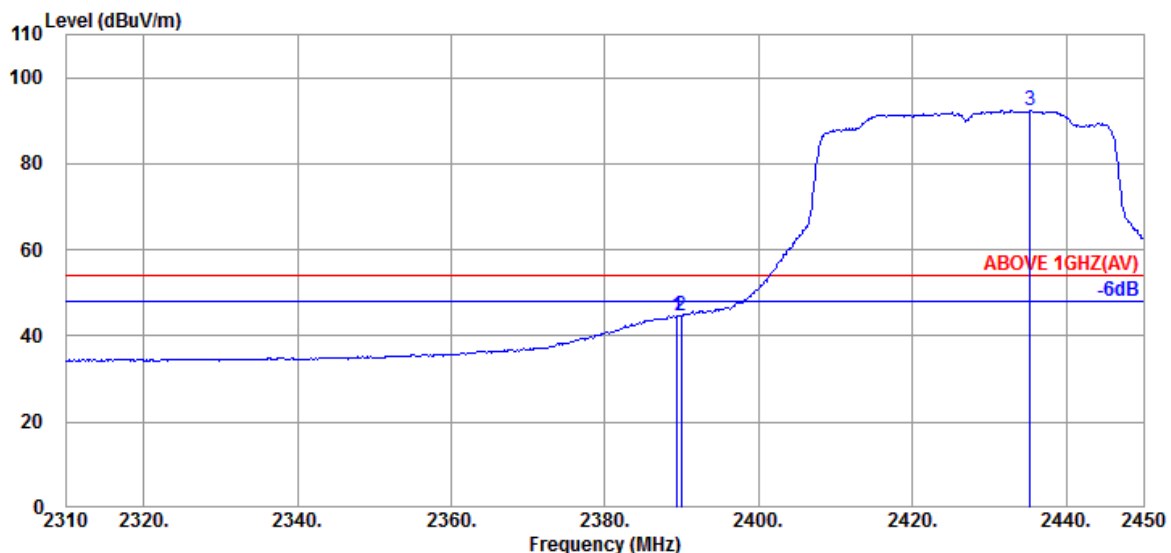

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.380	28.27	5.70	39.91	50.67	44.73	54.00	9.27	Average
2389.940	28.27	5.70	39.91	50.74	44.80	54.00	9.20	Average
@ 2435.300	28.51	5.76	39.91	97.89	92.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

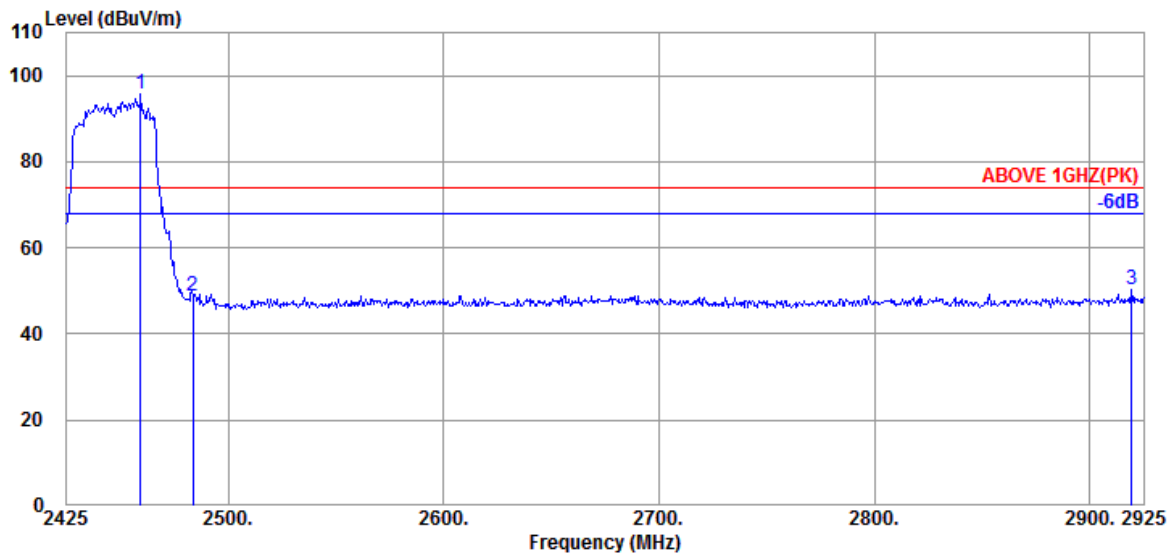

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.500	28.60	5.81	39.91	101.24	95.74	---	---	Peak
2483.500	28.60	5.83	39.91	54.20	48.72	74.00	25.28	Peak
2919.500	29.75	6.38	40.01	54.01	50.13	74.00	23.87	Peak

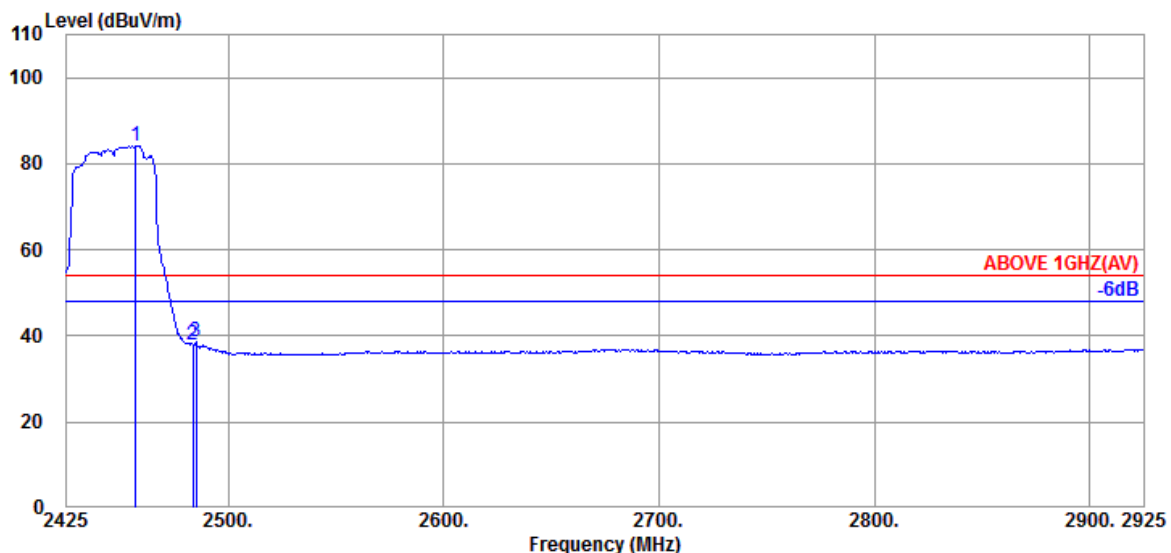

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2457.000	28.60	5.81	39.91	89.67	84.17	---	---	Average
2483.500	28.60	5.83	39.91	43.52	38.04	54.00	15.96	Average
2485.000	28.60	5.83	39.91	43.96	38.48	54.00	15.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

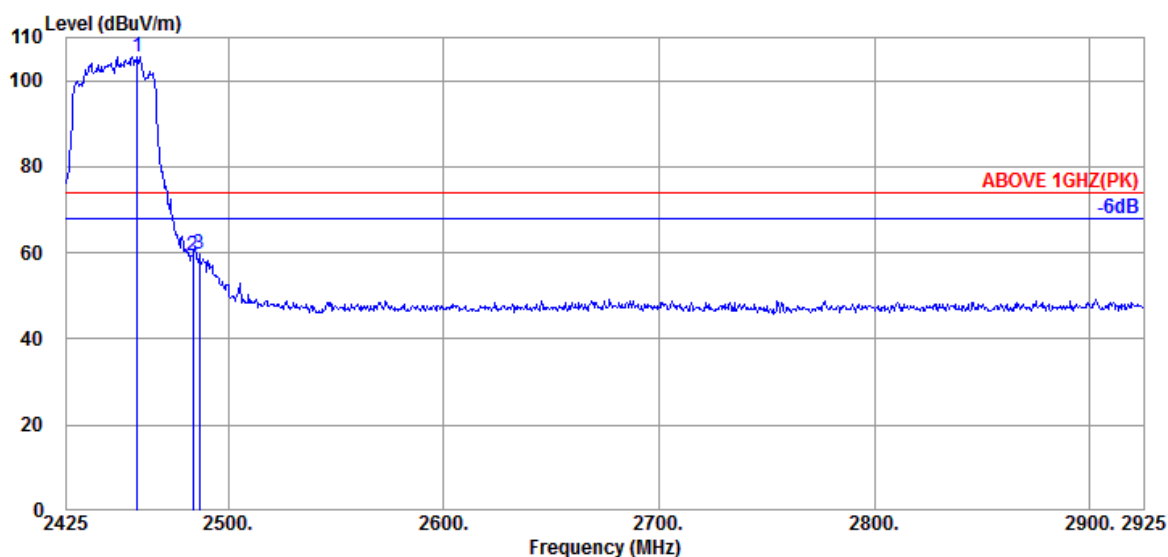

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.000	28.60	5.81	39.91	111.00	105.50	---	---	Peak
2483.500	28.60	5.83	39.91	64.96	59.48	74.00	14.52	Peak
2486.500	28.60	5.83	39.91	64.99	59.51	74.00	14.49	Peak

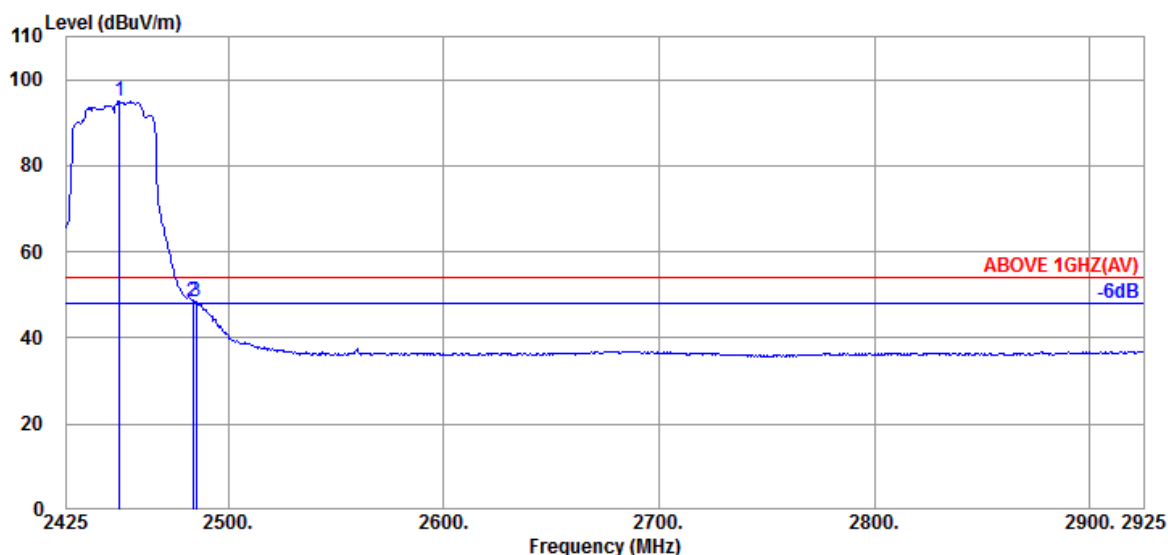

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2449.500	28.60	5.78	39.91	100.48	94.95	---	---	Average
2483.500	28.60	5.83	39.91	53.96	48.48	54.00	5.52	Average
2485.000	28.60	5.83	39.91	53.81	48.33	54.00	5.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

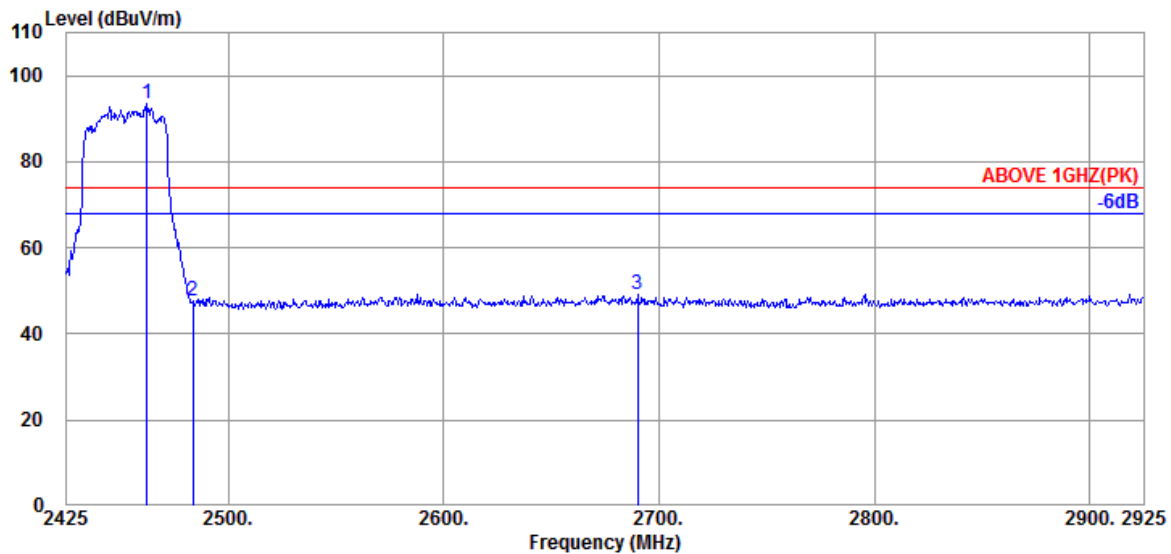

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	28.60	5.81	39.91	98.83	93.33	---	---	Peak
2483.500	28.60	5.83	39.91	53.25	47.77	74.00	26.23	Peak
2690.000	29.04	6.09	39.96	54.17	49.34	74.00	24.66	Peak

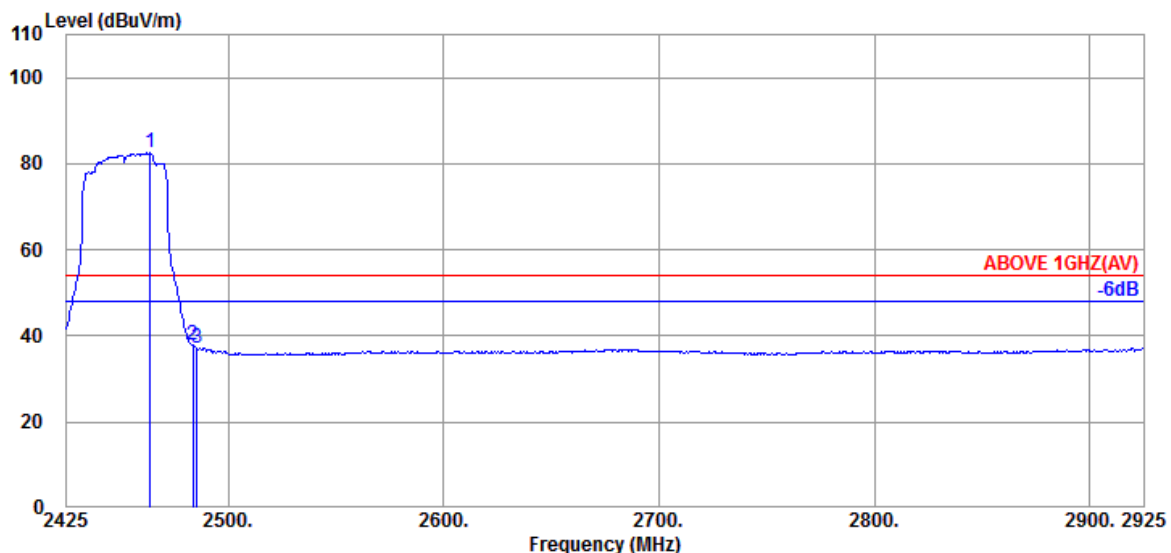

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.60	5.81	39.91	88.12	82.62	---	---	Average
2483.500	28.60	5.83	39.91	43.23	37.75	54.00	16.25	Average
2485.500	28.60	5.83	39.91	42.81	37.33	54.00	16.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

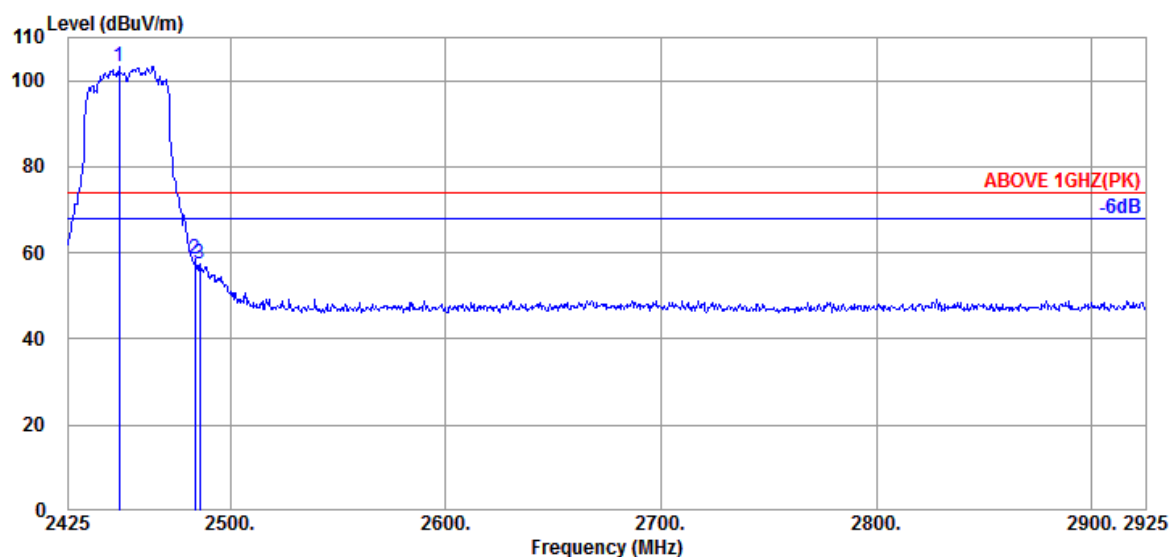

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.500	28.60	5.78	39.91	108.77	103.24	---	---	Peak
2483.500	28.60	5.83	39.91	63.97	58.49	74.00	15.51	Peak
2486.000	28.60	5.83	39.91	62.96	57.48	74.00	16.52	Peak

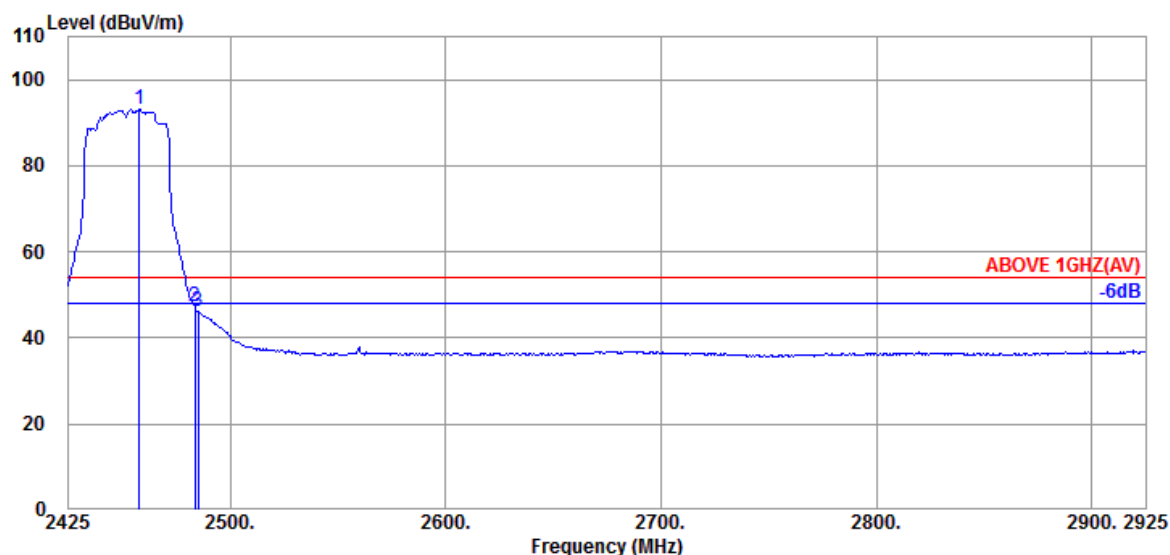

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	28.60	5.81	39.91	98.51	93.01	---	---	Average
2483.500	28.60	5.83	39.91	52.80	47.32	54.00	6.68	Average
2485.000	28.60	5.83	39.91	51.48	46.00	54.00	8.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

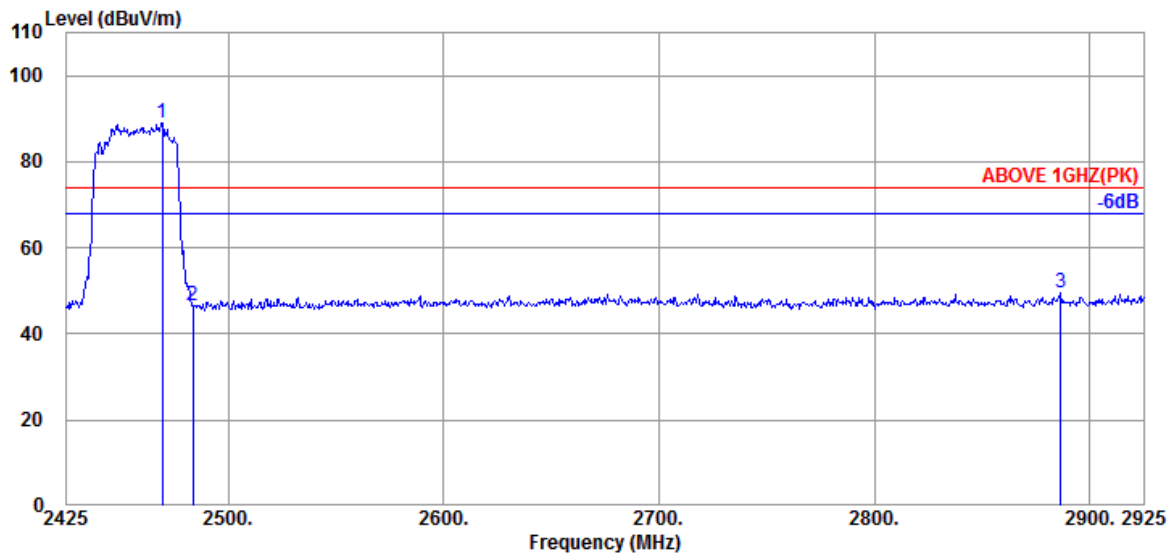

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.500	28.60	5.81	39.91	94.51	89.01	---	---	Peak
2483.500	28.60	5.83	39.91	52.12	46.64	74.00	27.36	Peak
2886.500	29.57	6.34	40.00	53.74	49.65	74.00	24.35	Peak

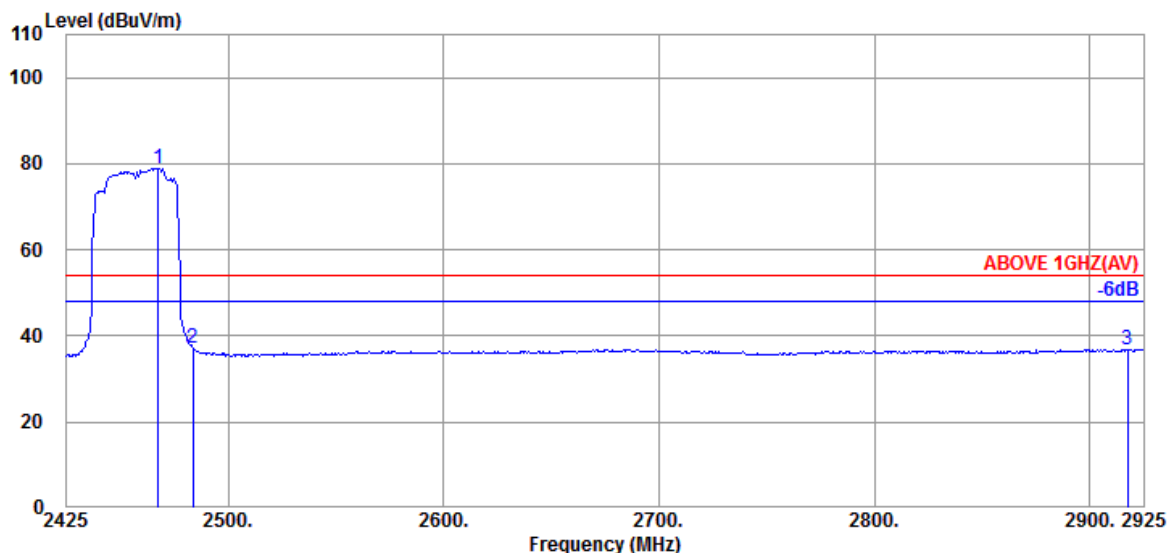

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.500	28.60	5.81	39.91	84.38	78.88	---	---	Average
2483.500	28.60	5.83	39.91	42.79	37.31	54.00	16.69	Average
2917.500	29.70	6.38	40.01	40.82	36.89	54.00	17.11	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

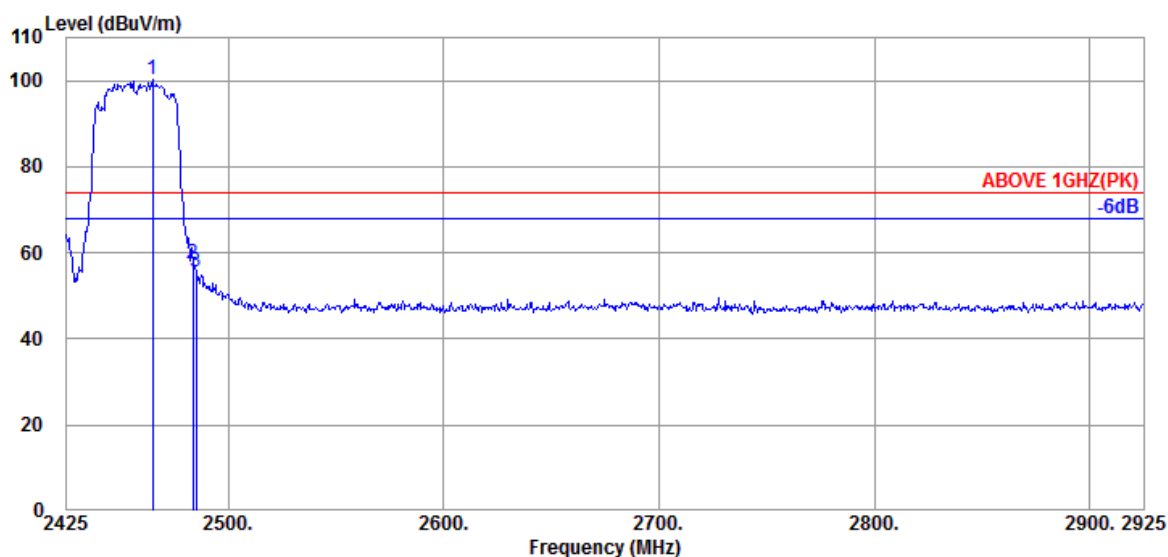

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	28.60	5.81	39.91	105.78	100.28	---	---	Peak
2483.500	28.60	5.83	39.91	62.86	57.38	74.00	16.62	Peak
2485.000	28.60	5.83	39.91	61.10	55.62	74.00	18.38	Peak

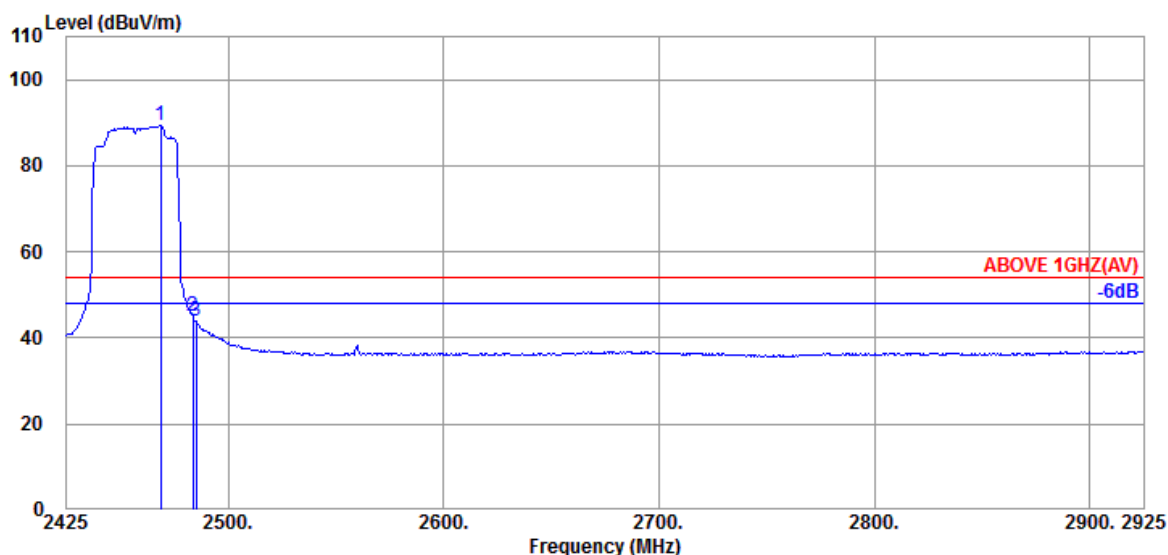

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.500	28.60	5.81	39.91	94.90	89.40	---	---	Average
2483.500	28.60	5.83	39.91	50.39	44.91	54.00	9.09	Average
2485.000	28.60	5.83	39.91	49.39	43.91	54.00	10.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

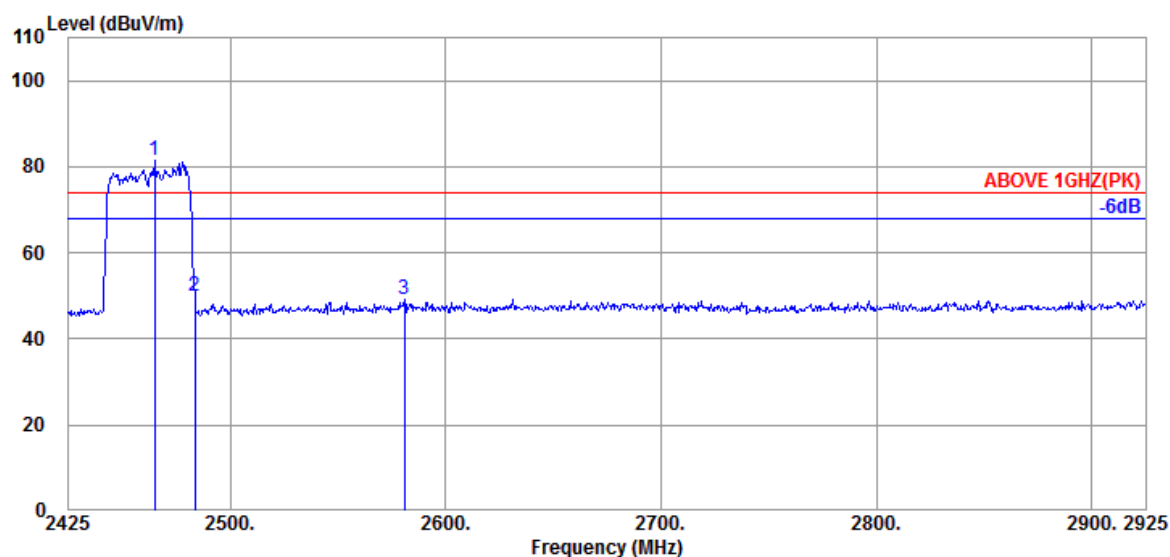

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	28.60	5.81	39.91	87.10	81.60	---	---	Peak
2483.500	28.60	5.83	39.91	55.27	49.79	74.00	24.21	Peak
2581.000	28.93	5.97	39.93	54.31	49.28	74.00	24.72	Peak

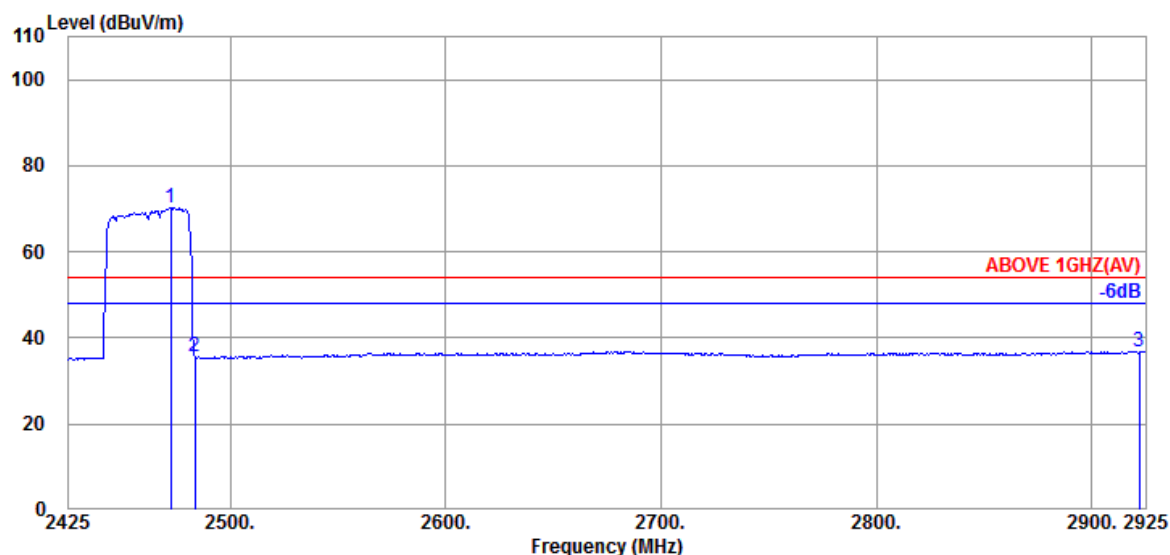

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.500	28.60	5.83	39.91	75.76	70.28	---	---	Average
2483.500	28.60	5.83	39.91	40.97	35.49	54.00	18.51	Average
2922.000	29.75	6.38	40.01	40.81	36.93	54.00	17.07	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

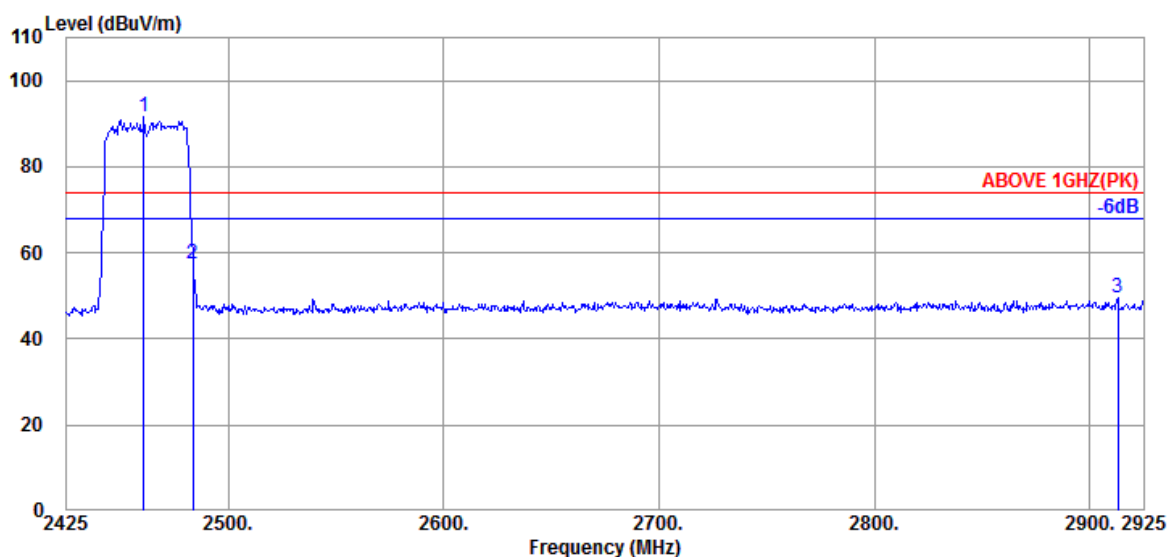

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	28.60	5.81	39.91	97.22	91.72	---	---	Peak
2483.500	28.60	5.83	39.91	63.11	57.63	74.00	16.37	Peak
2913.000	29.70	6.38	40.01	53.41	49.48	74.00	24.52	Peak

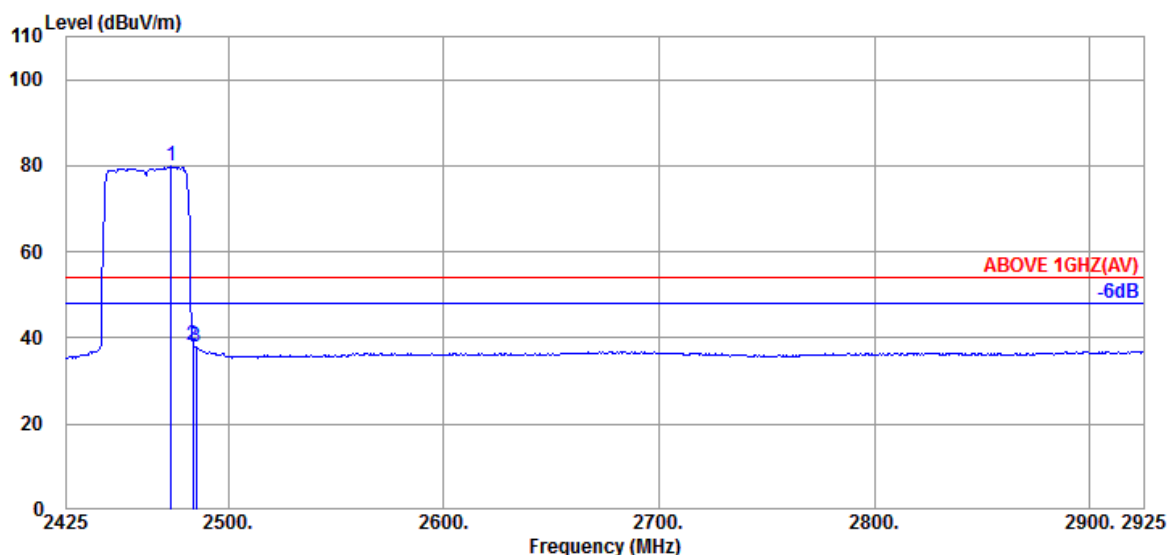

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.500	28.60	5.83	39.91	85.41	79.93	---	---	Average
2483.500	28.60	5.83	39.91	43.79	38.31	54.00	15.69	Average
2485.000	28.60	5.83	39.91	43.23	37.75	54.00	16.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

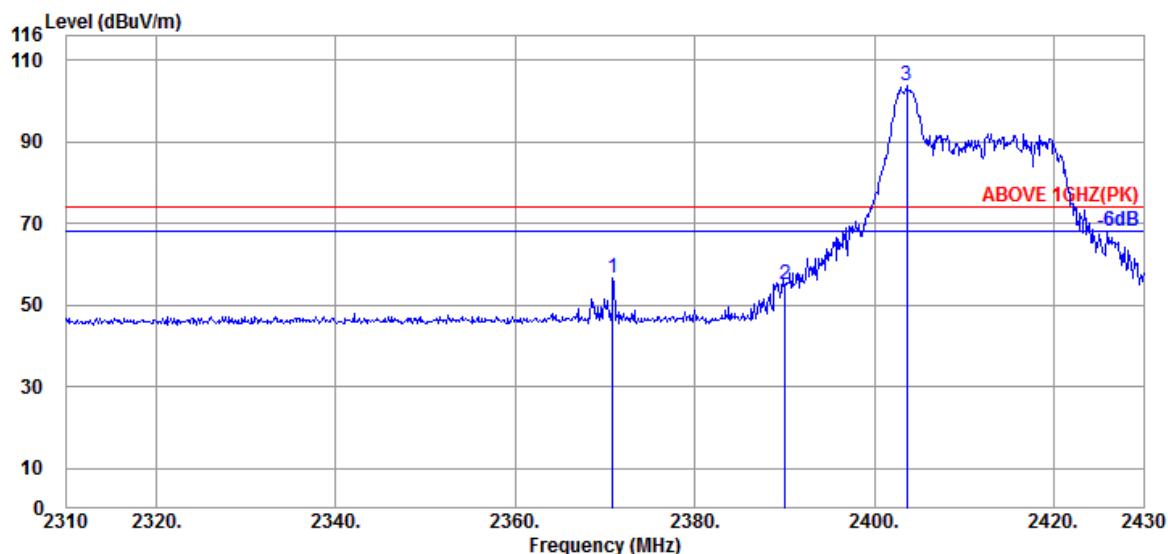

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.840	28.24	5.68	39.91	62.48	56.49	74.00	17.51	Peak
2390.040	28.27	5.70	39.91	60.85	54.91	74.00	19.09	Peak
@ 2403.600	28.30	5.73	39.91	109.80	103.92	---	---	Peak

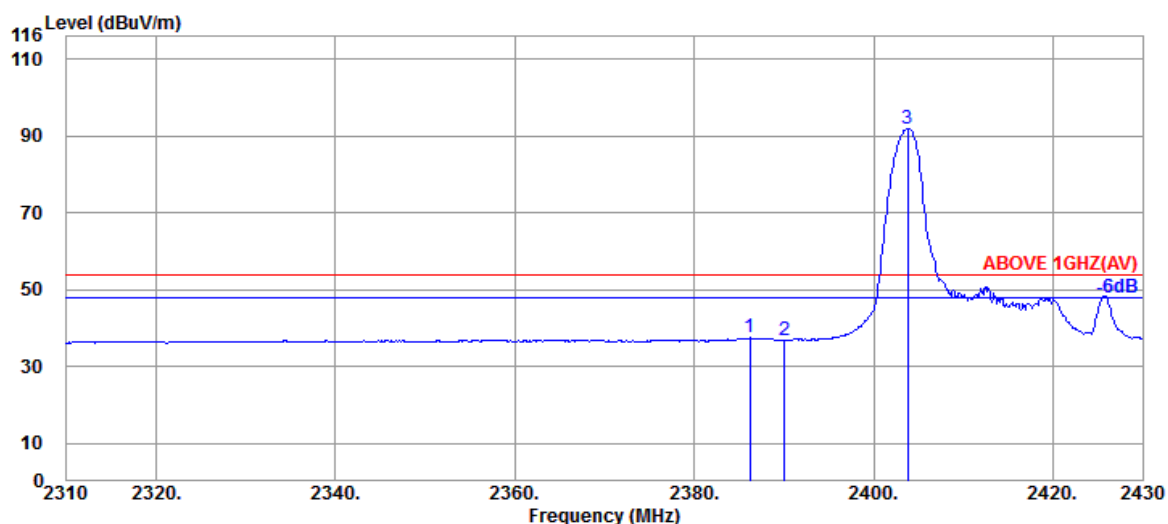

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	28.27	5.70	39.91	43.36	37.42	54.00	16.58	Average
2390.040	28.27	5.70	39.91	42.75	36.81	54.00	17.19	Average
@ 2403.840	28.30	5.73	39.91	97.85	91.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

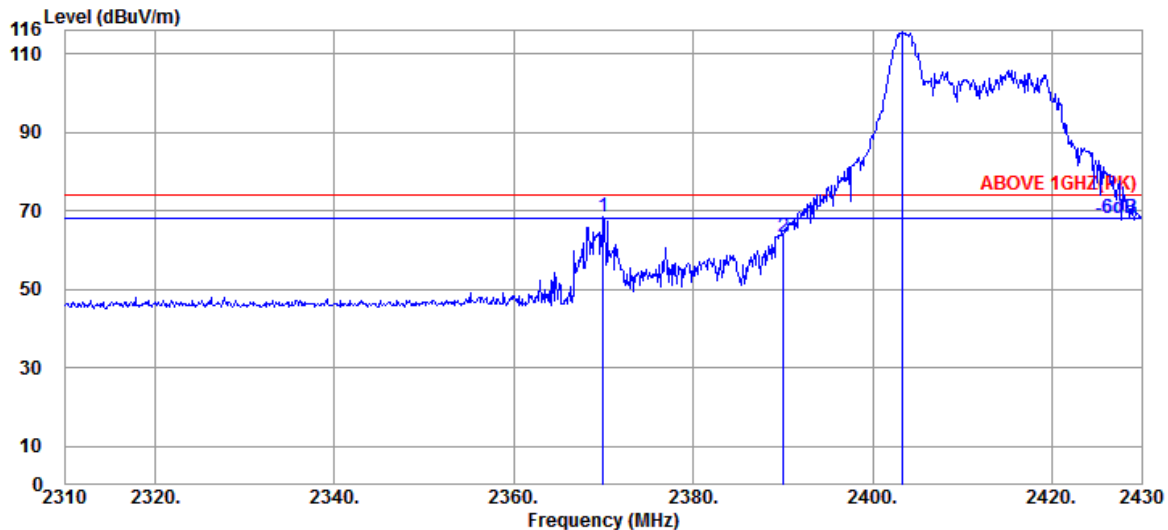

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.000	28.24	5.68	39.91	74.47	68.48	74.00	5.52	Peak
2390.040	28.27	5.70	39.91	69.41	63.47	74.00	10.53	Peak
@ 2403.240	28.30	5.73	39.91	121.47	115.59	---	---	Peak

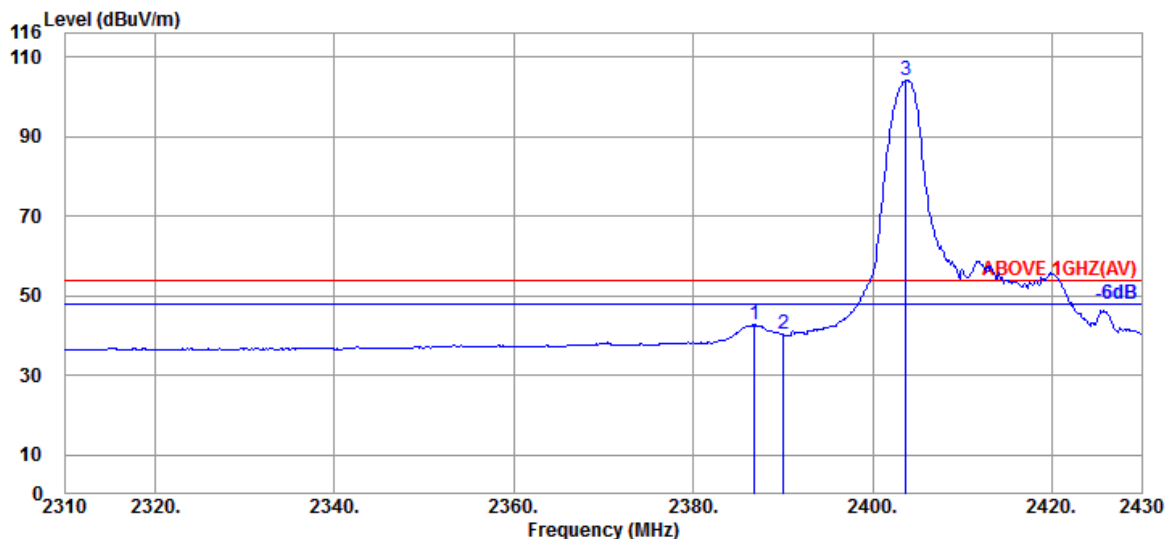

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.27	5.70	39.91	48.59	42.65	54.00	11.35	Average
2390.040	28.27	5.70	39.91	46.27	40.33	54.00	13.67	Average
@ 2403.720	28.30	5.73	39.91	110.09	104.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

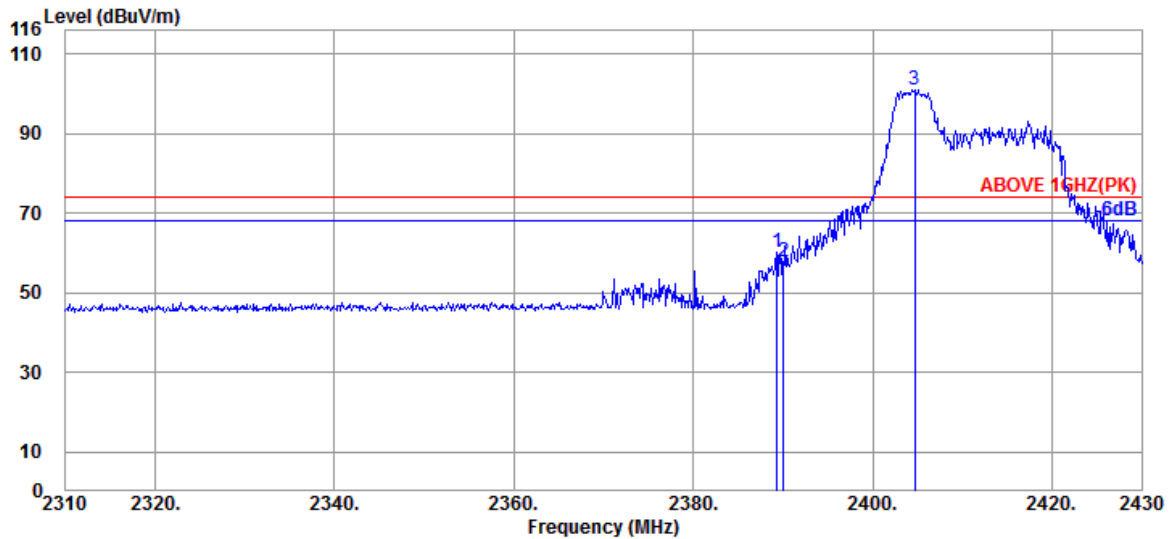

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.320	28.27	5.70	39.91	66.23	60.29	74.00	13.71	Peak
2390.040	28.27	5.70	39.91	63.83	57.89	74.00	16.11	Peak
@ 2404.680	28.34	5.73	39.91	106.95	101.11	---	---	Peak

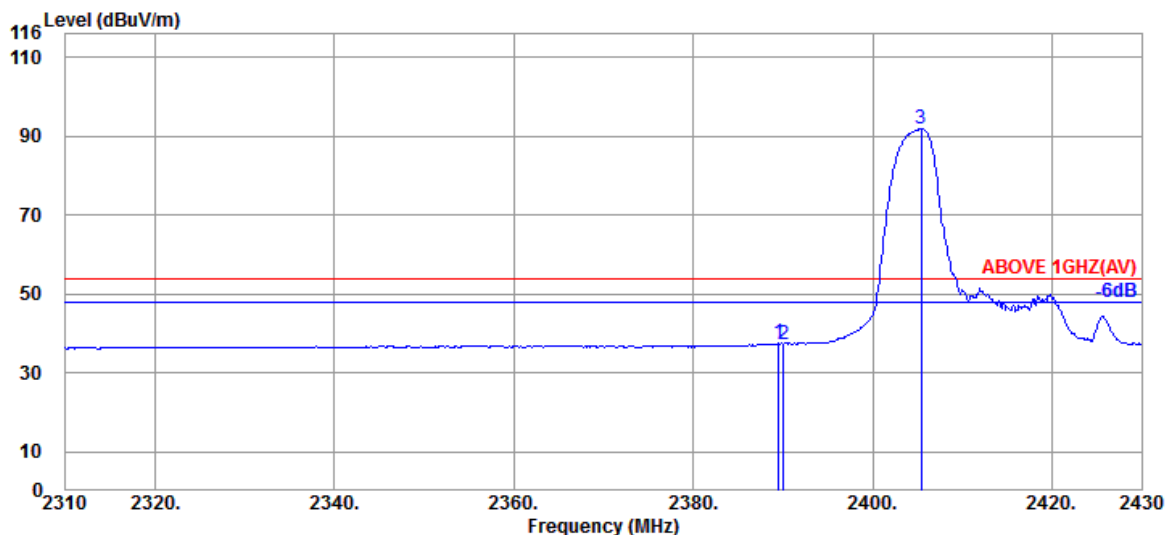

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.560	28.27	5.70	39.91	43.36	37.42	54.00	16.58	Average
2390.040	28.27	5.70	39.91	43.32	37.38	54.00	16.62	Average
@ 2405.400	28.34	5.73	39.91	97.55	91.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

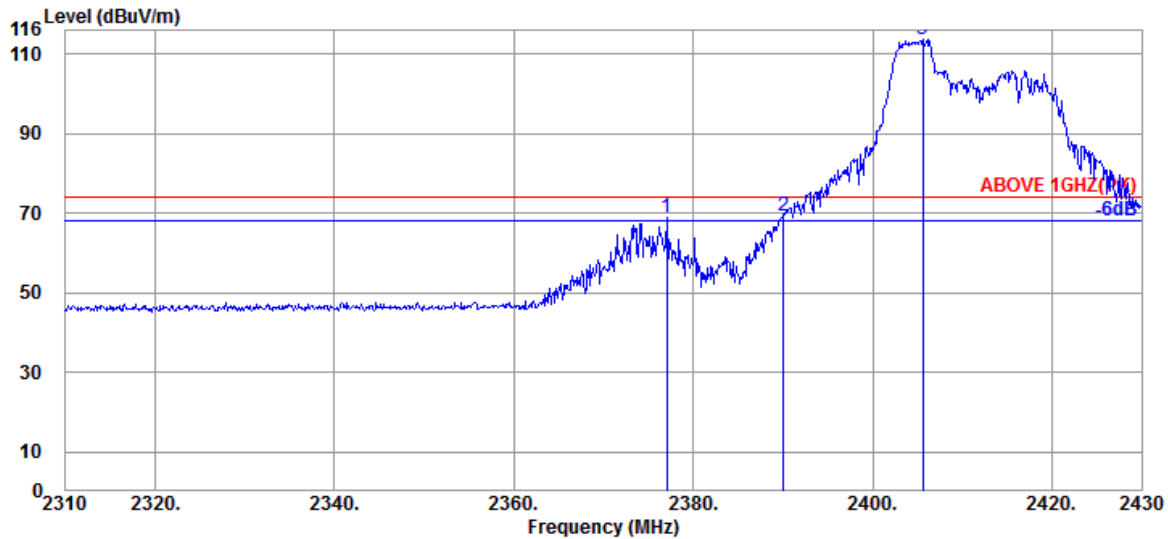

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2377.080	28.26	5.68	39.91	74.94	68.97	74.00	5.03	Peak
2390.040	28.27	5.70	39.91	75.14	69.20	74.00	4.80	Peak
@ 2405.640	28.34	5.73	39.91	119.47	113.63	---	---	Peak

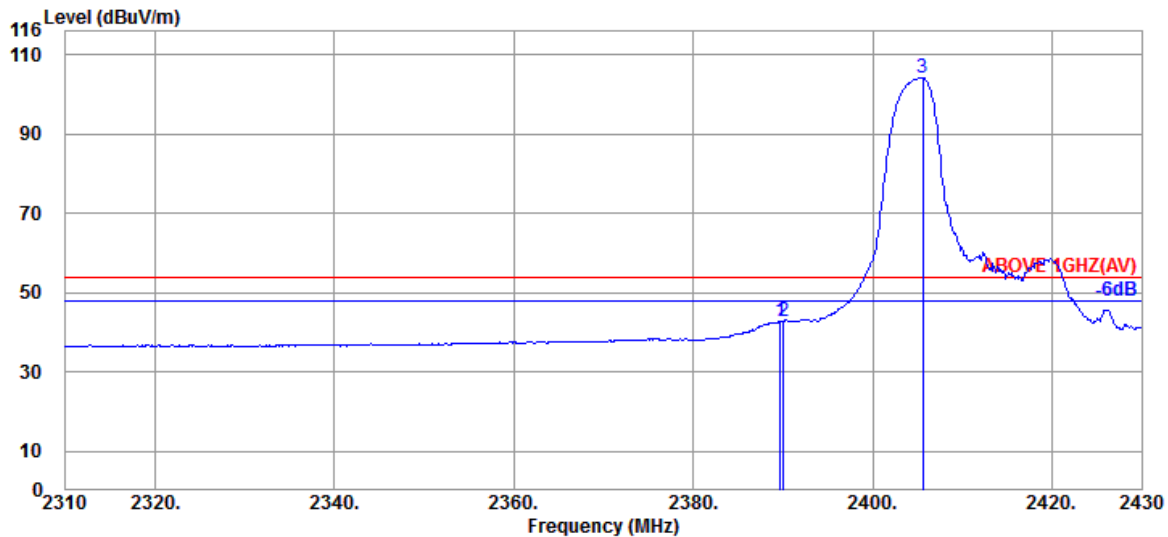

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.680	28.27	5.70	39.91	48.68	42.74	54.00	11.26	Average
2390.040	28.27	5.70	39.91	48.79	42.85	54.00	11.15	Average
@ 2405.640	28.34	5.73	39.91	110.07	104.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

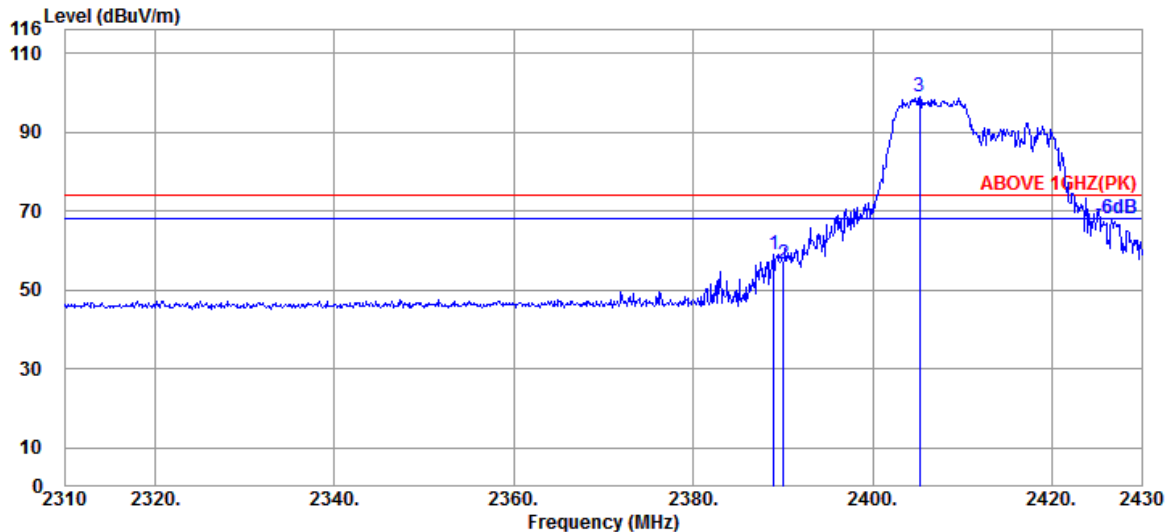

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	5.70	39.91	64.80	58.86	74.00	15.14	Peak
2390.040	28.27	5.70	39.91	62.52	56.58	74.00	17.42	Peak
@ 2405.280	28.34	5.73	39.91	104.66	98.82	---	---	Peak

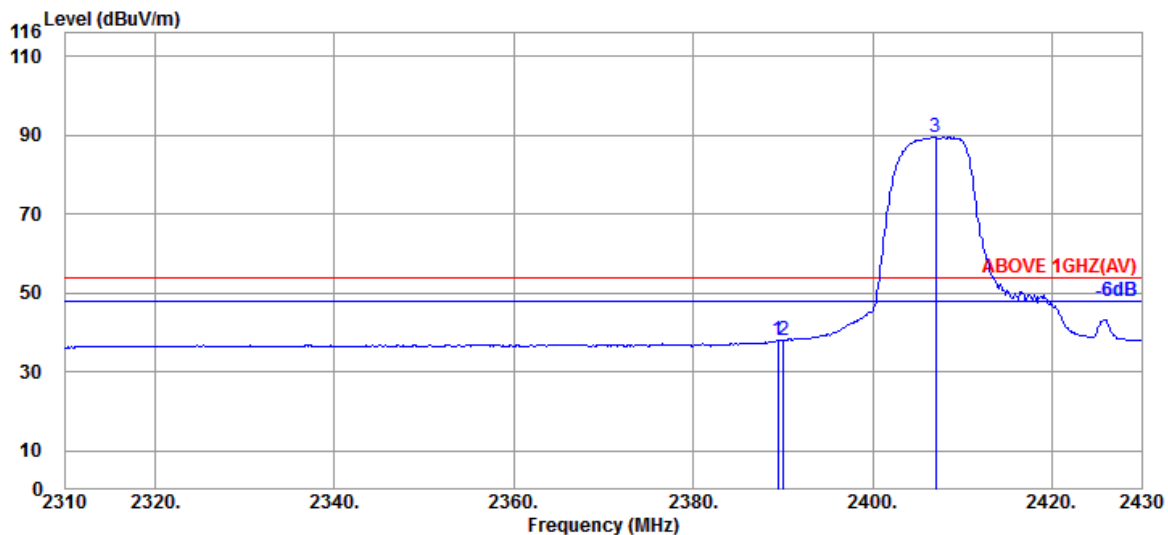

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	5.70	39.91	43.84	37.90	54.00	16.10	Average
2390.040	28.27	5.70	39.91	43.92	37.98	54.00	16.02	Average
@ 2407.080	28.34	5.73	39.91	95.19	89.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

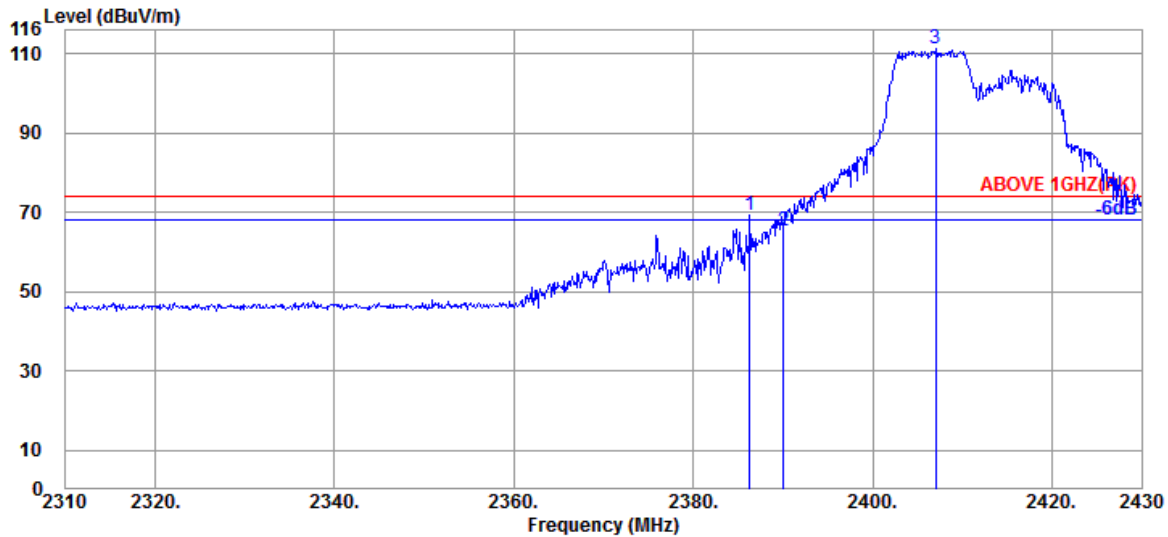

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.320	28.27	5.70	39.91	75.25	69.31	74.00	4.69	Peak
2390.040	28.27	5.70	39.91	71.31	65.37	74.00	8.63	Peak
@ 2407.080	28.34	5.73	39.91	116.89	111.05	---	---	Peak

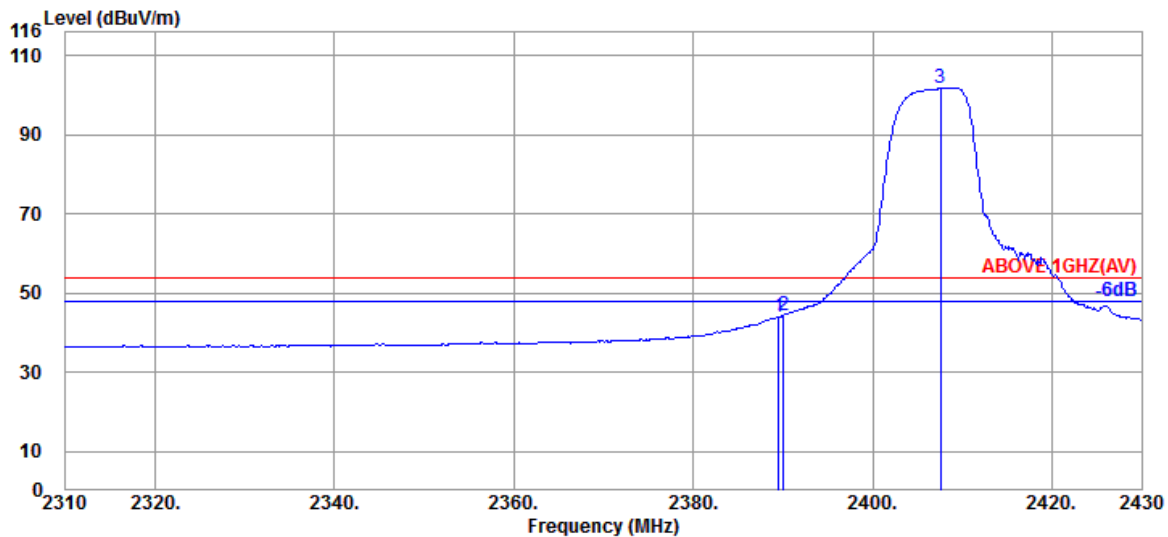

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	5.70	39.91	50.01	44.07	54.00	9.93	Average
2390.040	28.27	5.70	39.91	50.34	44.40	54.00	9.60	Average
@ 2407.560	28.34	5.73	39.91	107.65	101.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

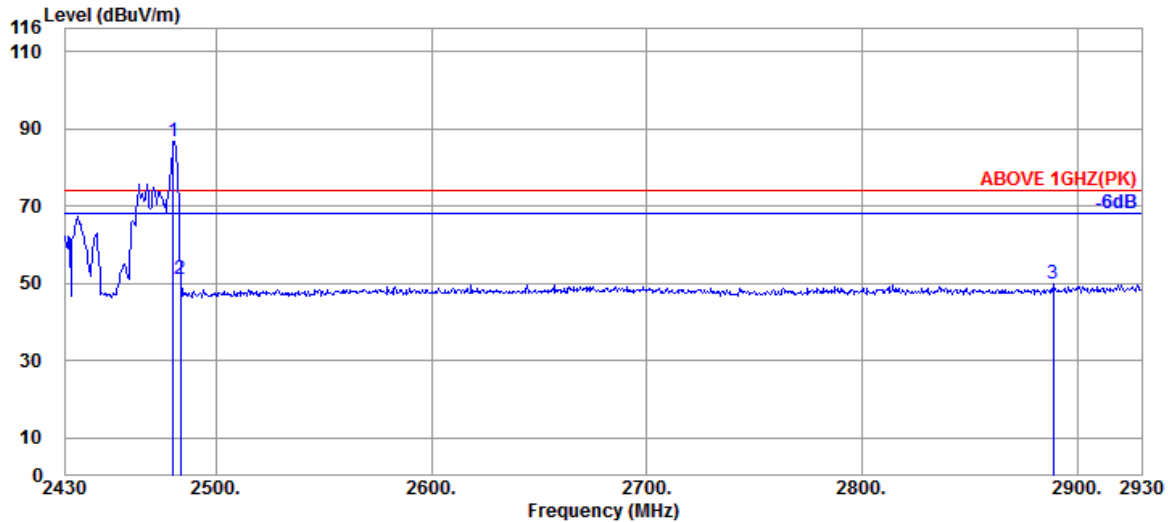

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.60	5.83	39.91	92.20	86.72	---	---	Peak
	2483.500	28.60	5.83	39.91	56.35	50.87	74.00	23.13	Peak
	2889.000	29.57	6.34	40.01	53.83	49.73	74.00	24.27	Peak

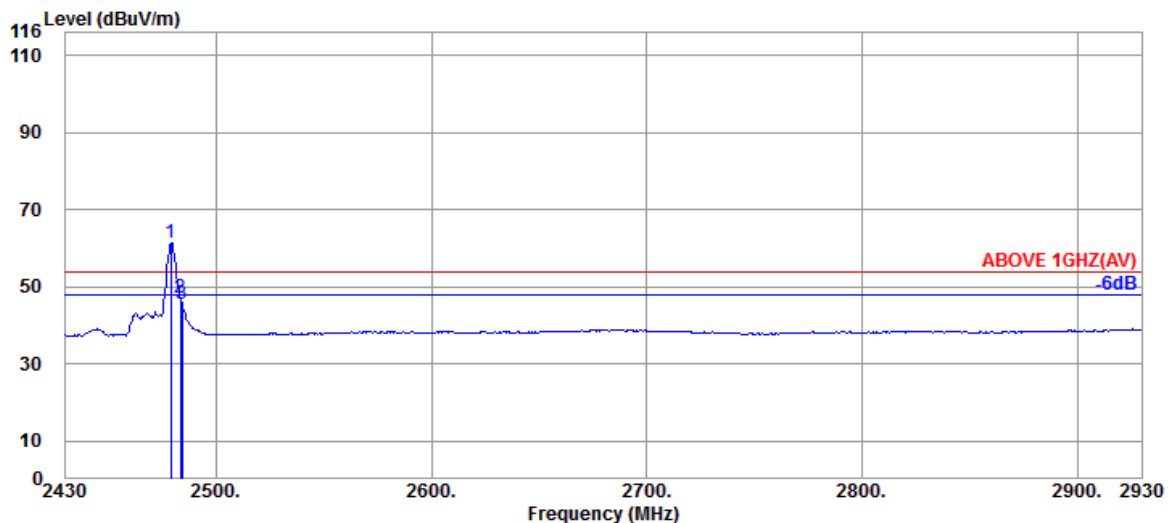

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.000	28.60	5.83	39.91	67.02	61.54	---	---	Average
	2483.500	28.60	5.83	39.91	52.45	46.97	54.00	7.03	Average
	2484.000	28.60	5.83	39.91	51.18	45.70	54.00	8.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

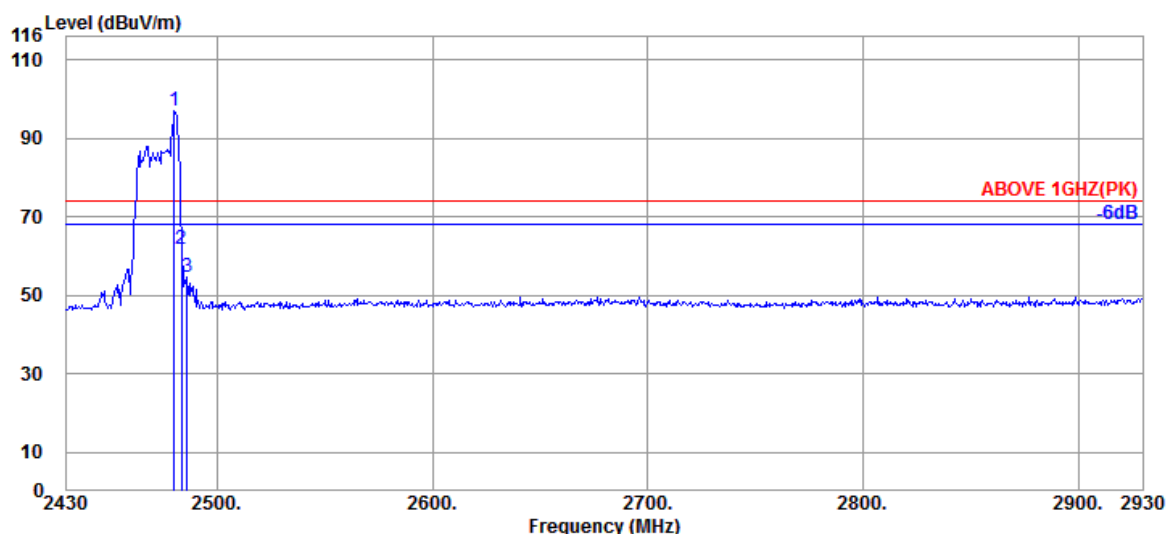

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	102.46	96.98	---	---	Peak
2483.500	28.60	5.83	39.91	67.37	61.89	74.00	12.11	Peak
2486.000	28.60	5.83	39.91	60.24	54.76	74.00	19.24	Peak

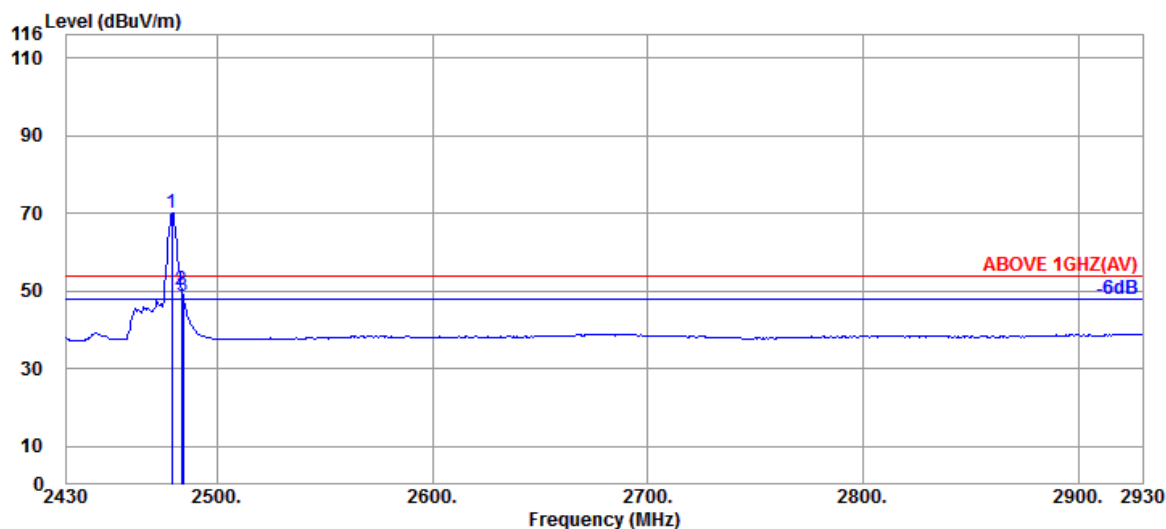

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	75.48	70.00	---	---	Average
2483.500	28.60	5.83	39.91	55.72	50.24	54.00	3.76	Average
2484.000	28.60	5.83	39.91	54.14	48.66	54.00	5.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

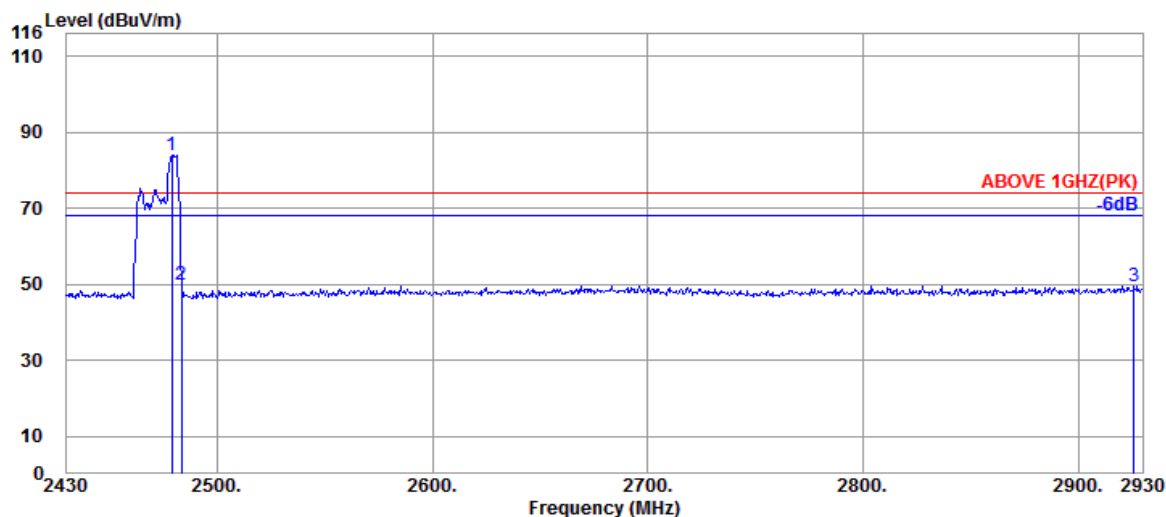

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	89.53	84.05	---	---	Peak
2483.500	28.60	5.83	39.91	55.46	49.98	74.00	24.02	Peak
2926.000	29.75	6.38	40.01	53.55	49.67	74.00	24.33	Peak

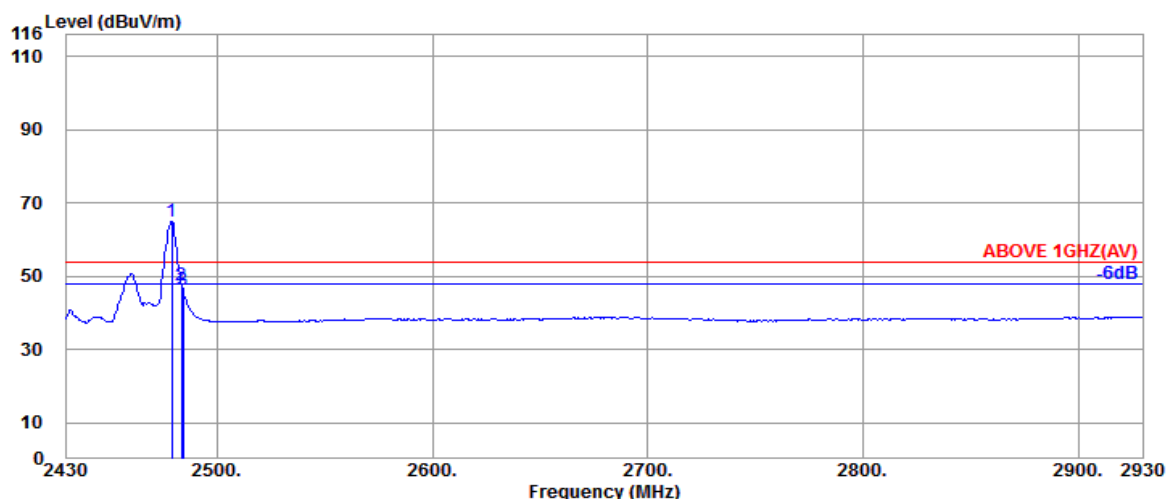

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	70.51	65.03	---	---	Average
2483.500	28.60	5.83	39.91	52.96	47.48	54.00	6.52	Average
2484.000	28.60	5.83	39.91	51.65	46.17	54.00	7.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

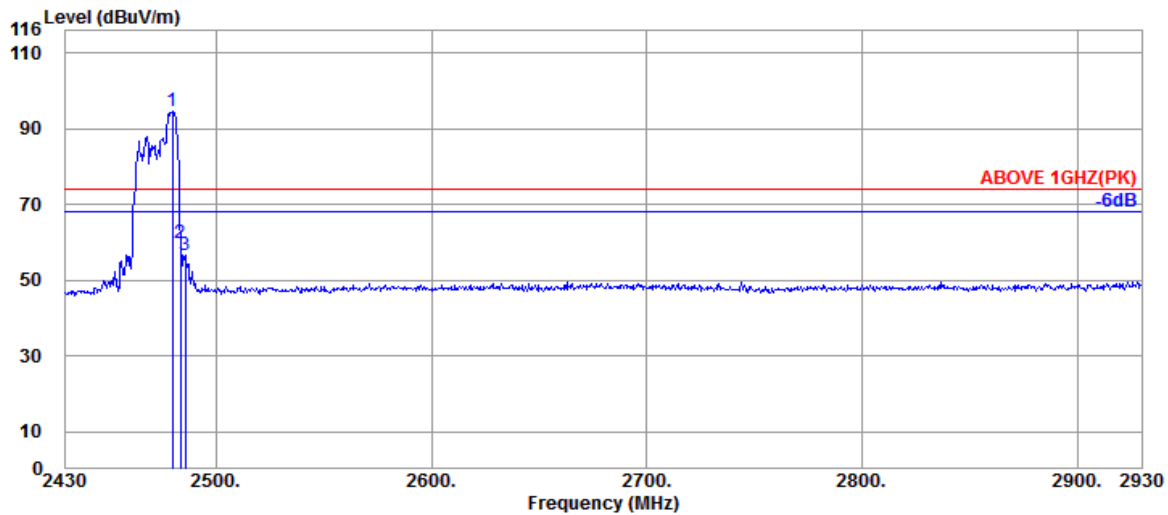

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.60	5.83	39.91	99.95	94.47	---	---	Peak
2483.500	28.60	5.83	39.91	65.12	59.64	74.00	14.36	Peak
2485.500	28.60	5.83	39.91	62.28	56.80	74.00	17.20	Peak

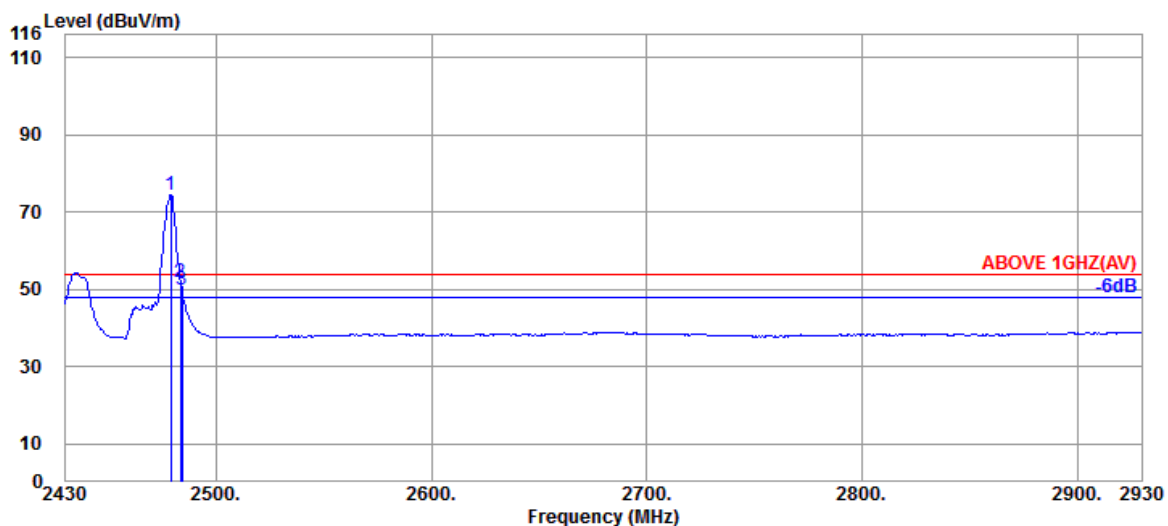

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	79.91	74.43	---	---	Average
2483.500	28.60	5.83	39.91	57.15	51.67	54.00	2.33	Average
2484.000	28.60	5.83	39.91	55.38	49.90	54.00	4.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

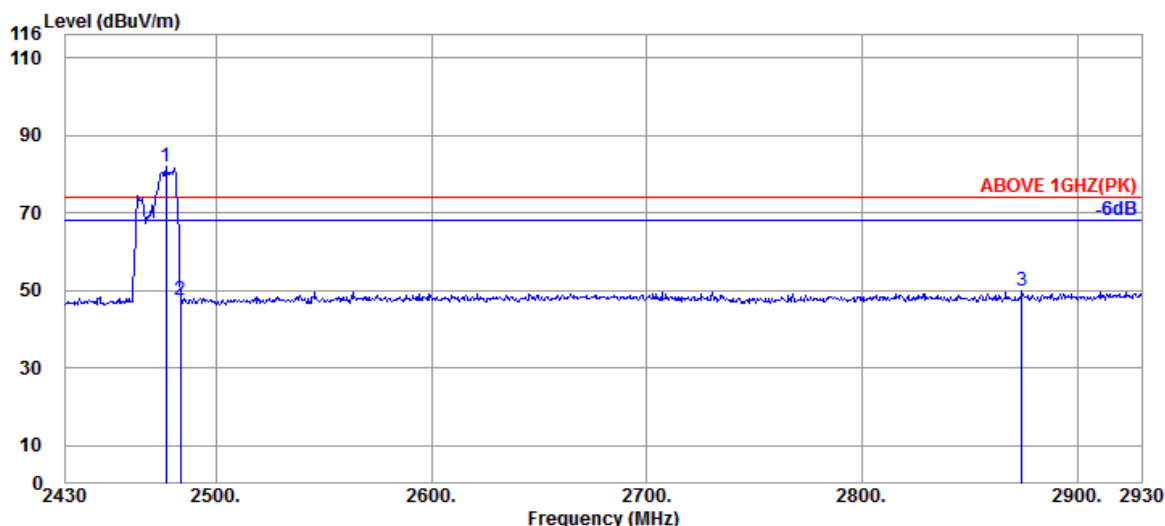

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.60	5.83	39.91	87.27	81.79	---	---	Peak
2483.500	28.60	5.83	39.91	53.08	47.60	74.00	26.40	Peak
2874.500	29.50	6.32	40.00	53.92	49.74	74.00	24.26	Peak

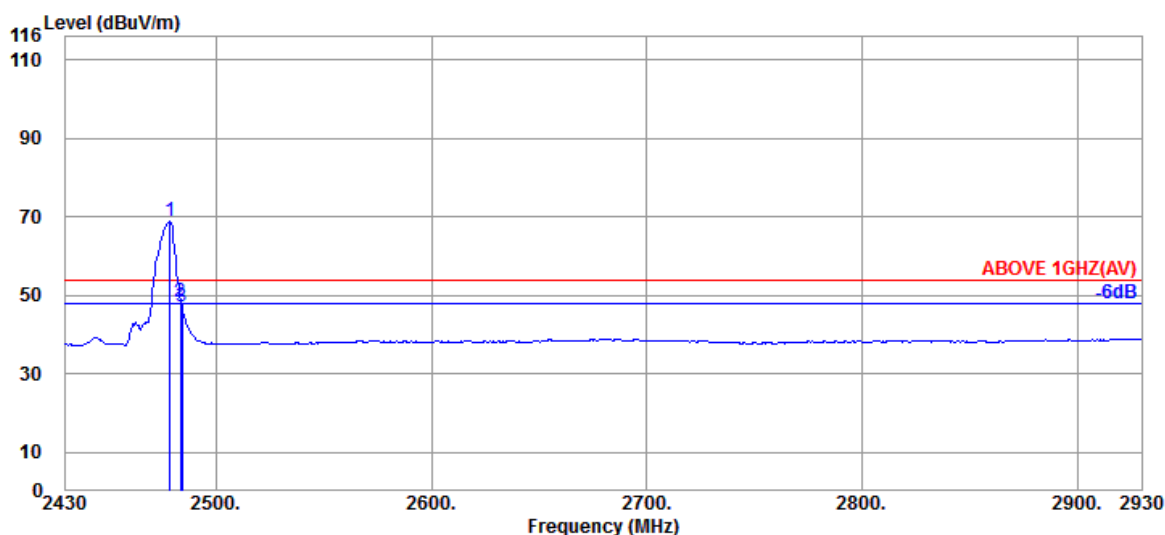

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.60	5.83	39.91	74.33	68.85	---	---	Average
2483.500	28.60	5.83	39.91	53.95	48.47	54.00	5.53	Average
2484.000	28.60	5.83	39.91	52.52	47.04	54.00	6.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

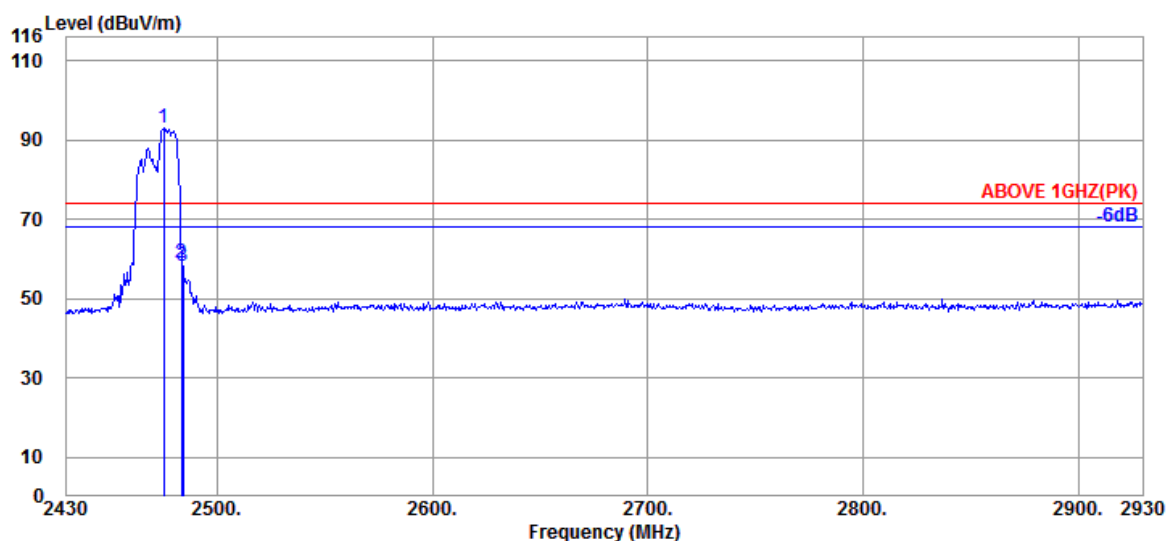

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	28.60	5.83	39.91	98.61	93.13	---	---	Peak
2483.500	28.60	5.83	39.91	64.62	59.14	74.00	14.86	Peak
2484.000	28.60	5.83	39.91	63.52	58.04	74.00	15.96	Peak

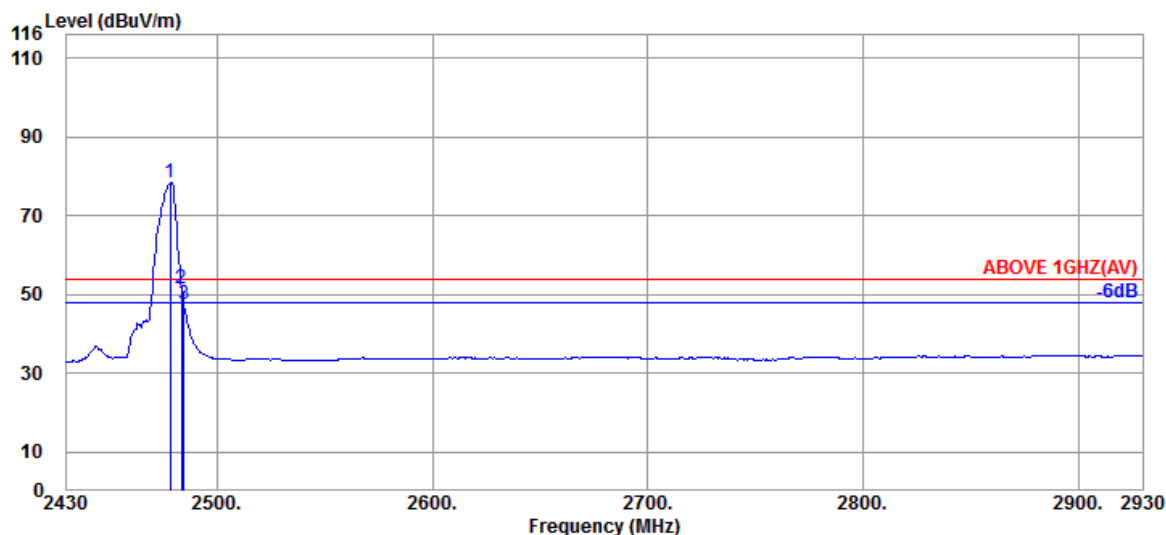

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.60	5.83	39.91	83.94	78.46	---	---	Average
2483.500	28.60	5.83	39.91	56.89	51.41	54.00	2.59	Average
2484.500	28.60	5.83	39.91	52.94	47.46	54.00	6.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

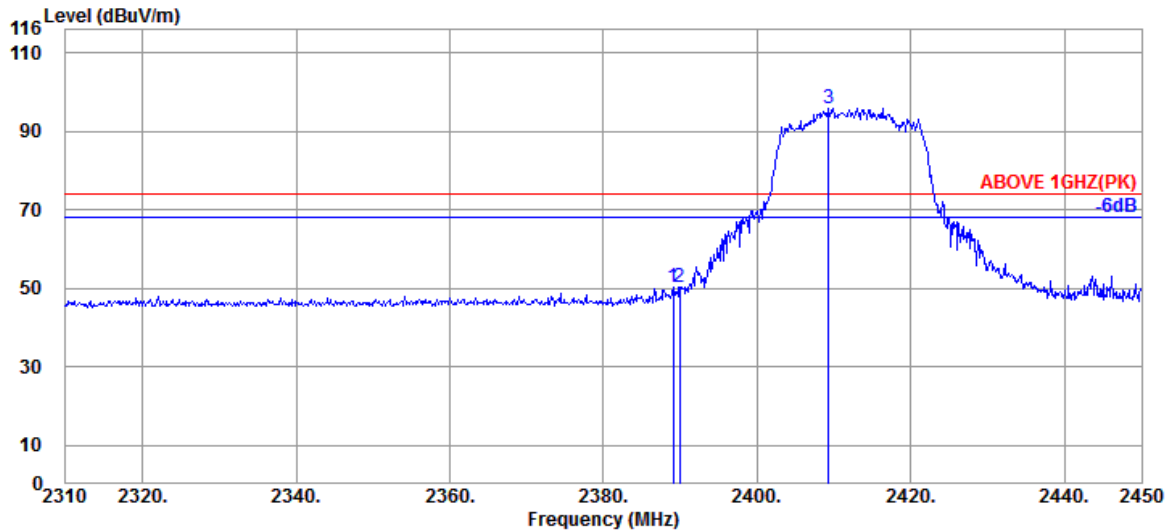

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.100	28.27	5.70	39.91	56.15	50.21	74.00	23.79	Peak
2389.940	28.27	5.70	39.91	56.09	50.15	74.00	23.85	Peak
@ 2409.260	28.34	5.73	39.91	101.77	95.93	---	---	Peak

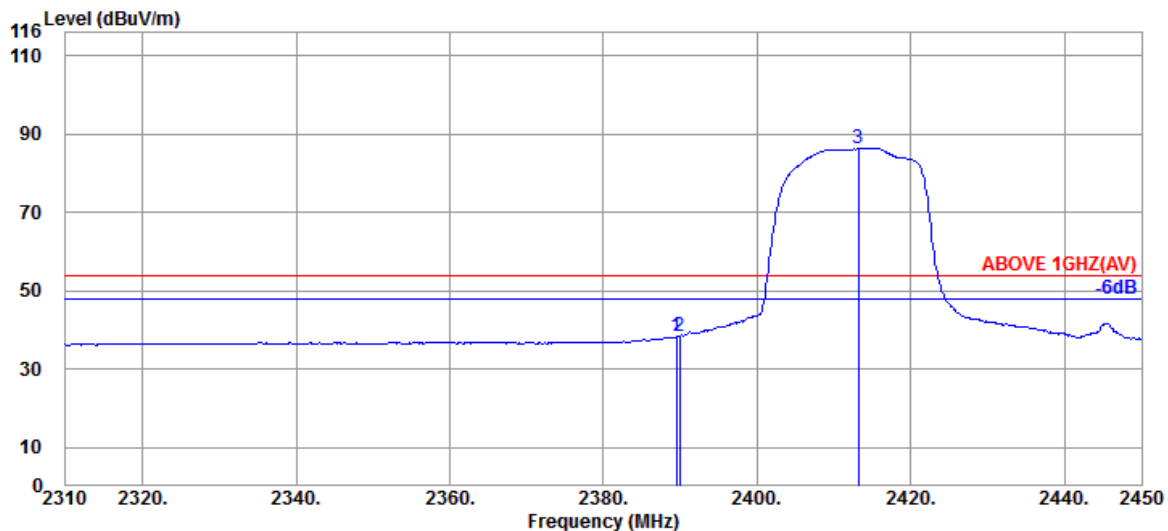

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	44.29	38.35	54.00	15.65	Average
2389.940	28.27	5.70	39.91	44.45	38.51	54.00	15.49	Average
@ 2413.180	28.39	5.73	39.91	92.05	86.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

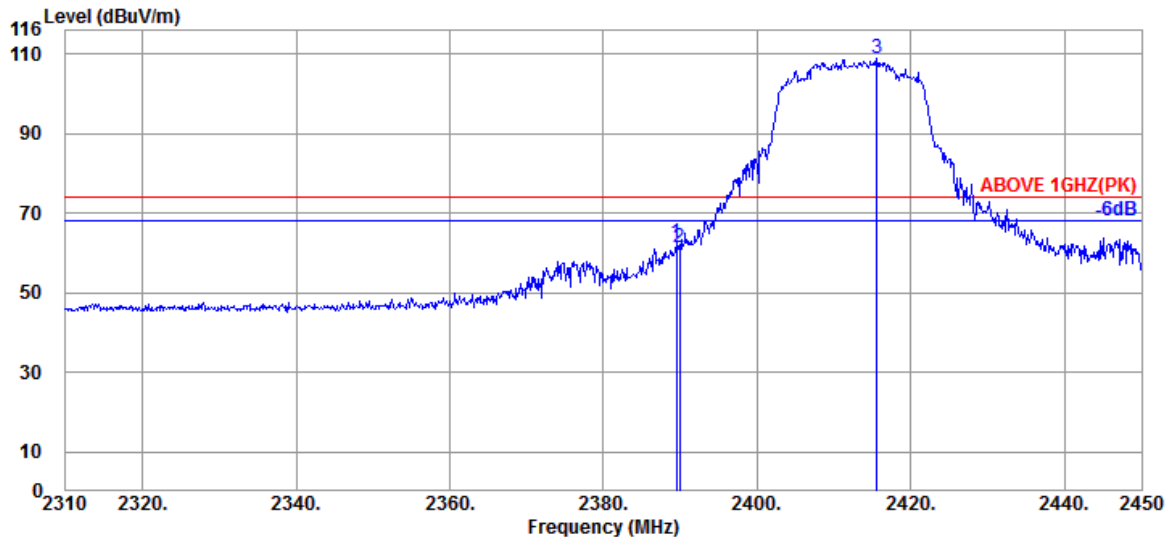

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	68.41	62.47	74.00	11.53	Peak
2389.940	28.27	5.70	39.91	67.23	61.29	74.00	12.71	Peak
@ 2415.560	28.39	5.73	39.91	114.54	108.75	---	---	Peak

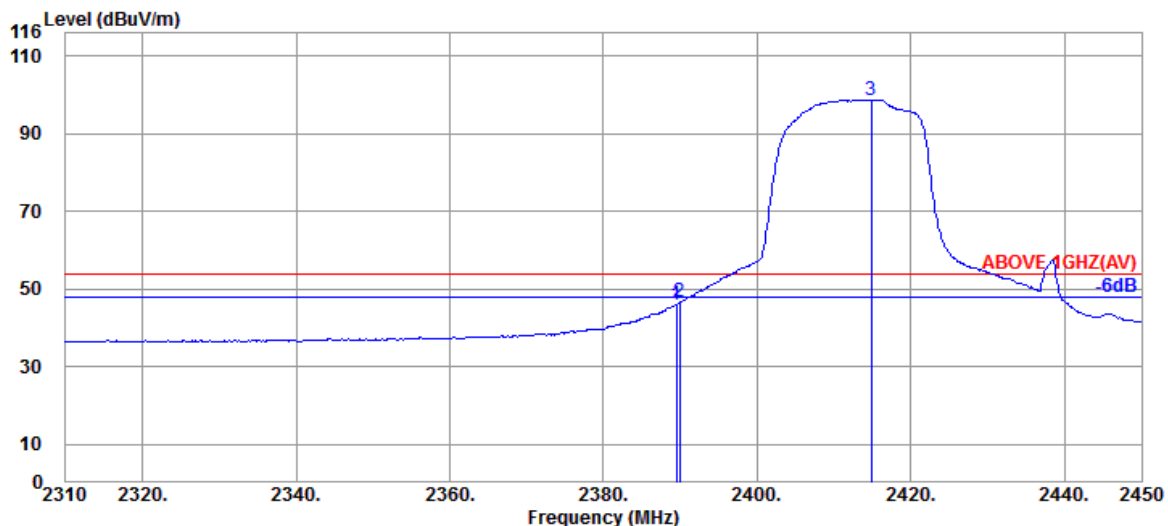

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	52.02	46.08	54.00	7.92	Average
2389.940	28.27	5.70	39.91	52.61	46.67	54.00	7.33	Average
@ 2414.860	28.39	5.73	39.91	104.56	98.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

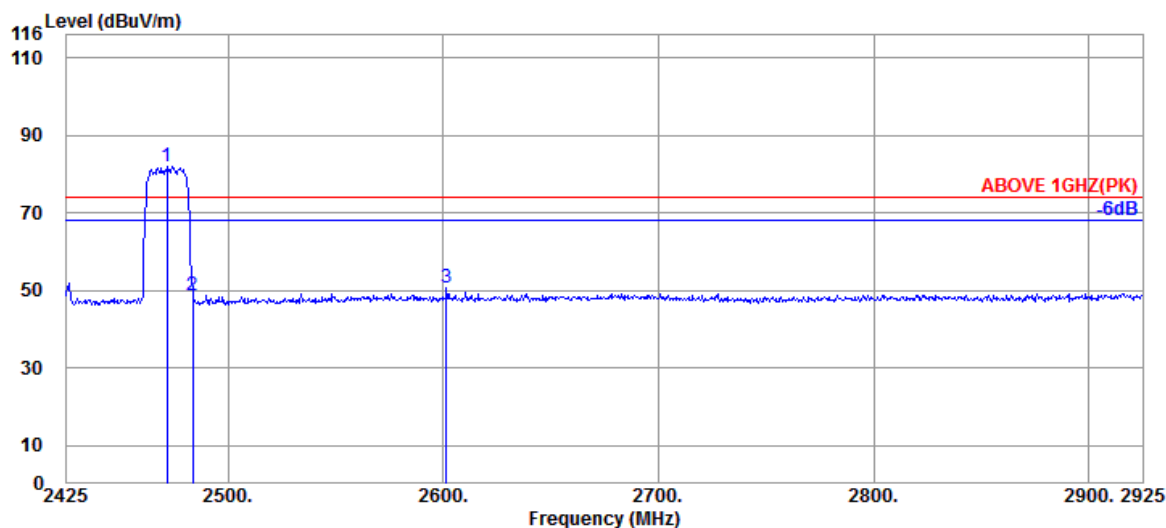

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	28.60	5.83	39.91	87.43	81.95	---	---	Peak
2483.500	28.60	5.83	39.91	54.05	48.57	74.00	25.43	Peak
2601.500	29.10	5.99	39.94	55.42	50.57	74.00	23.43	Peak

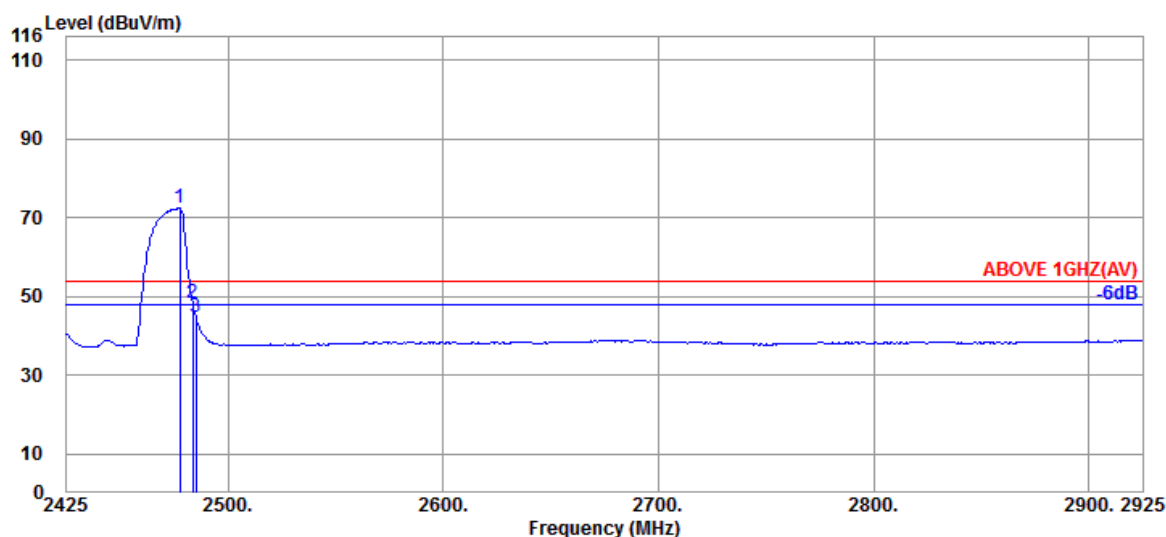

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.60	5.83	39.91	77.83	72.35	---	---	Average
2483.500	28.60	5.83	39.91	53.68	48.20	54.00	5.80	Average
2485.000	28.60	5.83	39.91	50.34	44.86	54.00	9.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

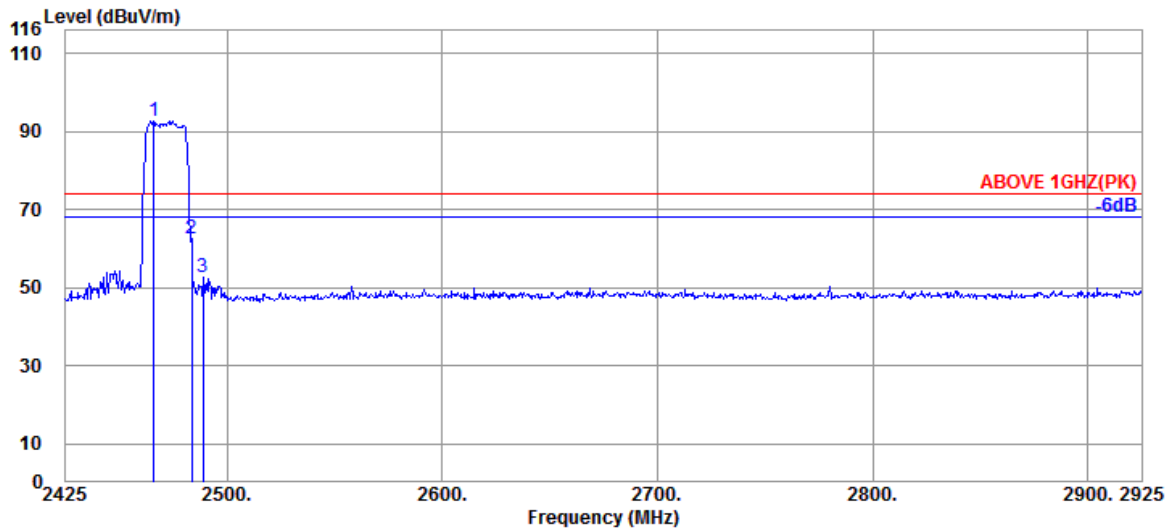

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.60	5.81	39.91	98.30	92.80	---	---	Peak
2483.500	28.60	5.83	39.91	68.18	62.70	74.00	11.30	Peak
2489.000	28.60	5.86	39.91	58.24	52.79	74.00	21.21	Peak

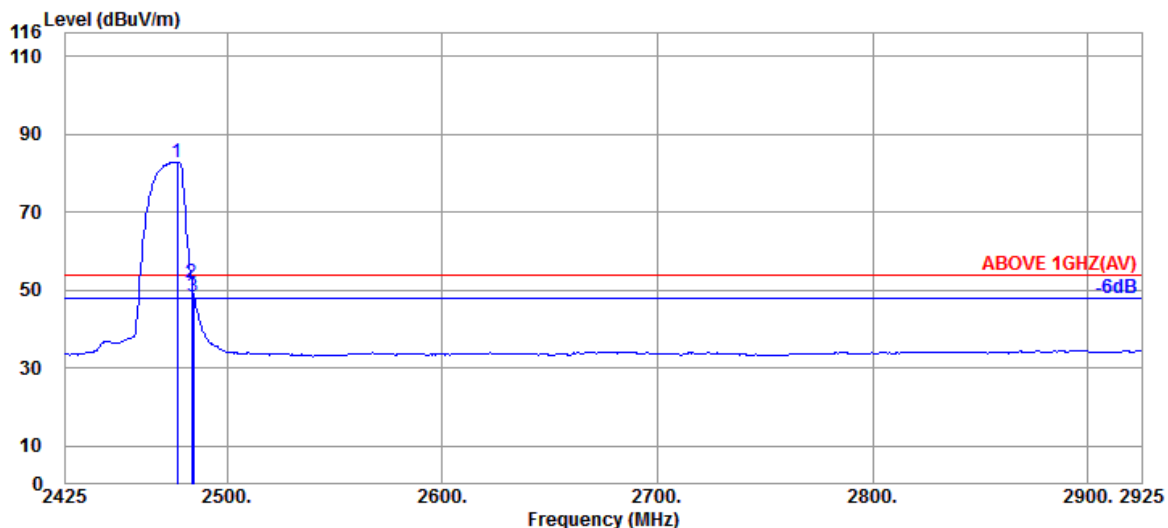

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.60	5.83	39.91	88.30	82.82	---	---	Average
2483.500	28.60	5.83	39.91	57.49	52.01	54.00	1.99	Average
2484.500	28.60	5.83	39.91	53.85	48.37	54.00	5.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

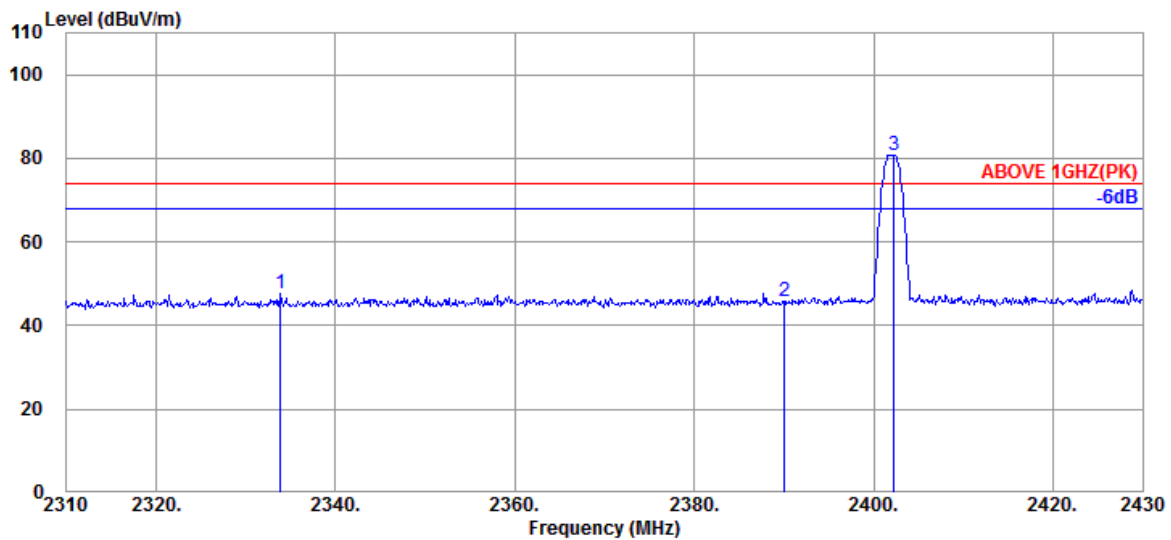

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2333.880	28.16	5.60	39.91	53.93	47.78	74.00	26.22	Peak
2390.040	28.27	5.70	39.91	51.89	45.95	74.00	28.05	Peak
@ 2402.280	28.30	5.70	39.91	86.76	80.85	---	---	Peak

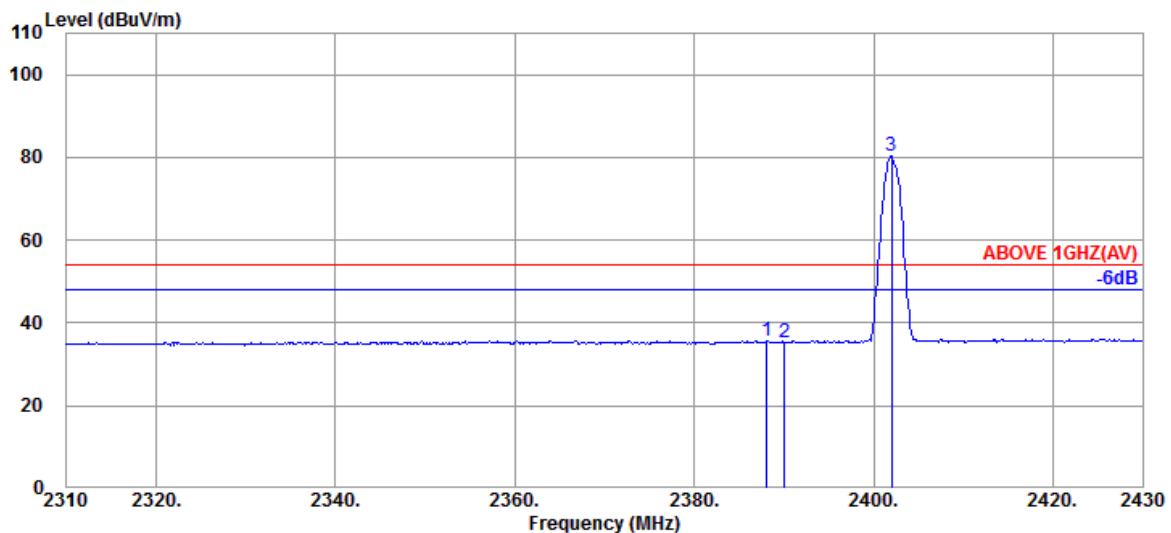

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	28.27	5.70	39.91	41.75	35.81	54.00	18.19	Average
2390.040	28.27	5.70	39.91	41.32	35.38	54.00	18.62	Average
@ 2402.040	28.30	5.70	39.91	86.15	80.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

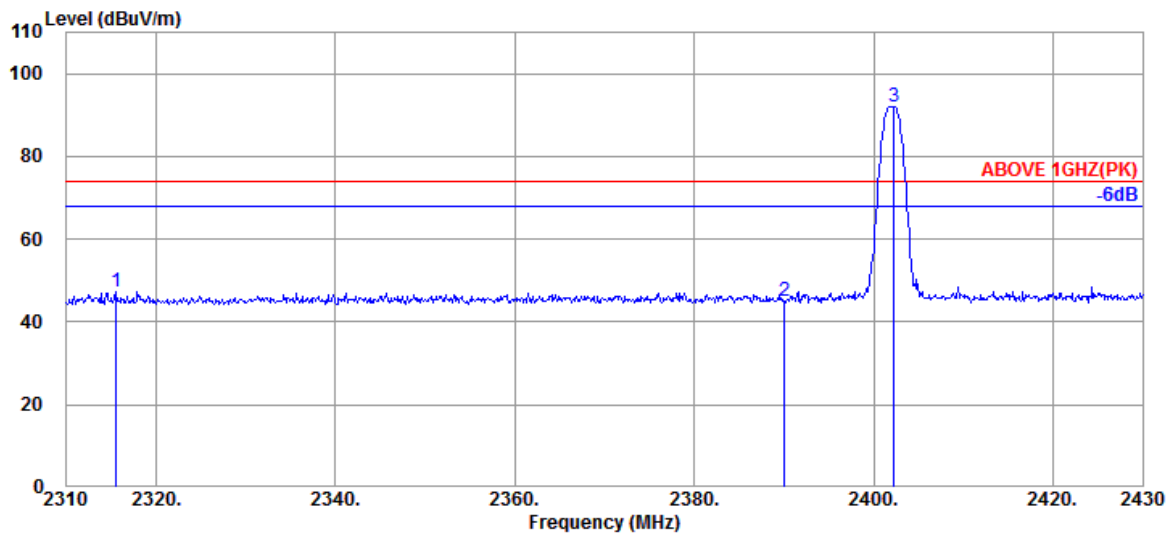

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2315.520	28.12	5.57	39.91	53.38	47.16	74.00	26.84	Peak
2390.040	28.27	5.70	39.91	51.04	45.10	74.00	28.90	Peak
@ 2402.280	28.30	5.70	39.91	98.00	92.09	---	---	Peak

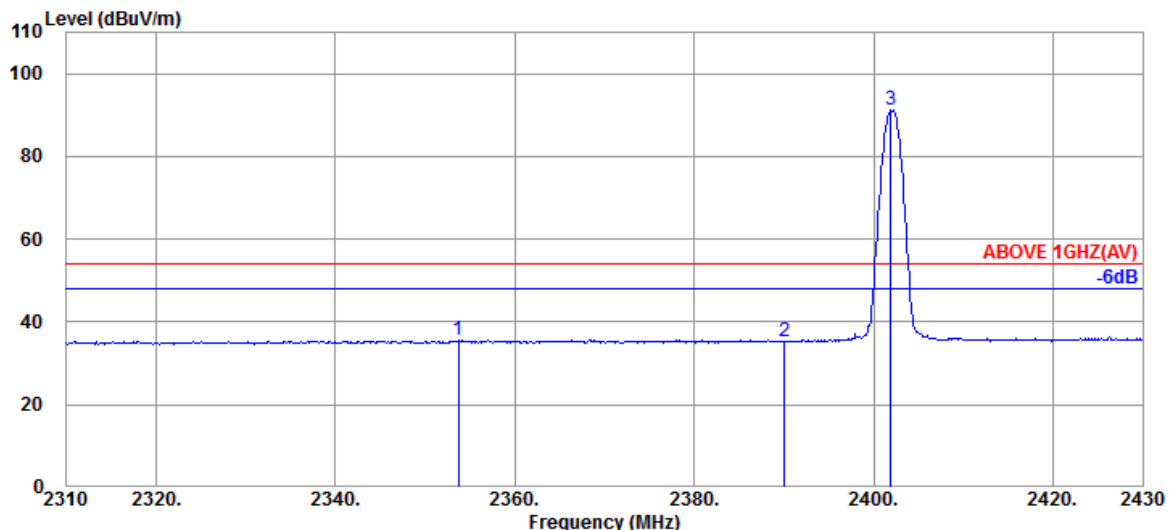

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2353.680	28.20	5.65	39.91	41.80	35.74	54.00	18.26	Average
2390.040	28.27	5.70	39.91	41.21	35.27	54.00	18.73	Average
@ 2401.920	28.30	5.70	39.91	97.01	91.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182

Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

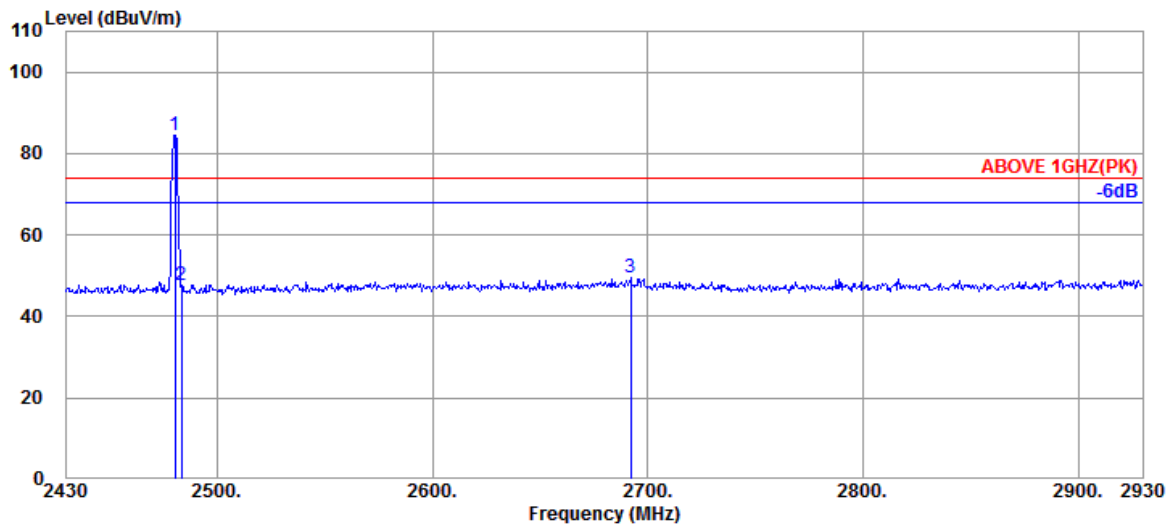

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	89.90	84.42	---	---	Peak
2483.500	28.60	5.83	39.91	53.09	47.61	74.00	26.39	Peak
2692.000	29.07	6.11	39.96	54.31	49.53	74.00	24.47	Peak

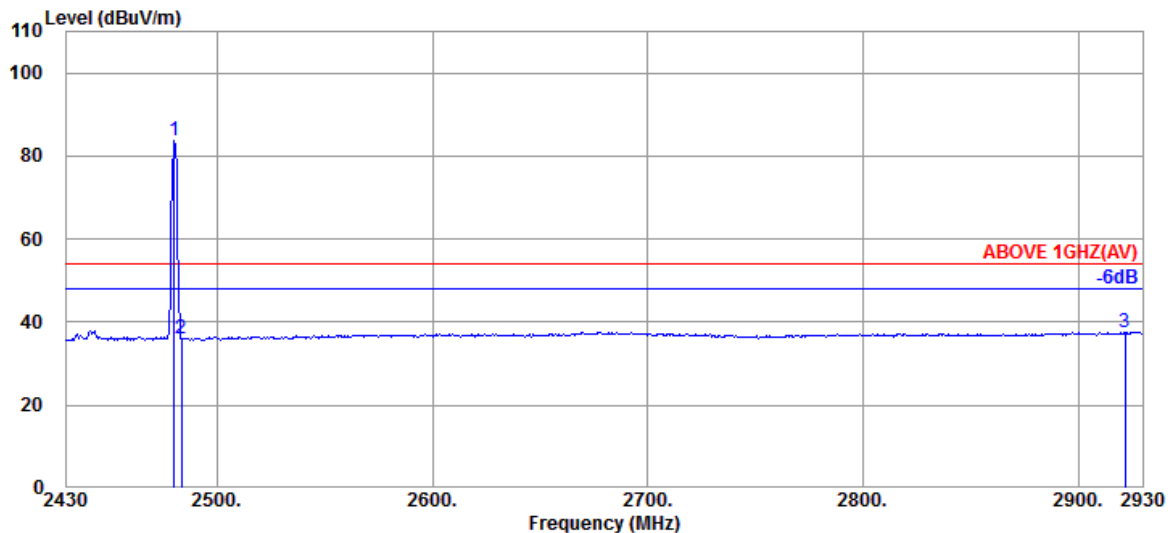

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	89.23	83.75	---	---	Average
2483.500	28.60	5.83	39.91	41.55	36.07	54.00	17.93	Average
2922.000	29.75	6.38	40.01	41.60	37.72	54.00	16.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

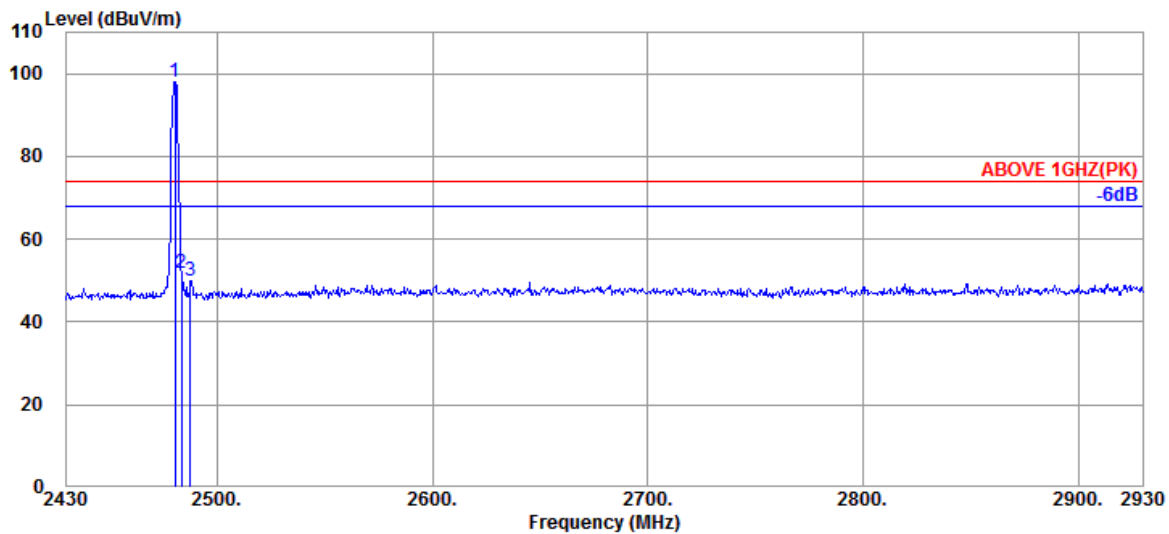

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	103.46	97.98	---	---	Peak
2483.500	28.60	5.83	39.91	57.26	51.78	74.00	22.22	Peak
2487.500	28.60	5.86	39.91	55.52	50.07	74.00	23.93	Peak

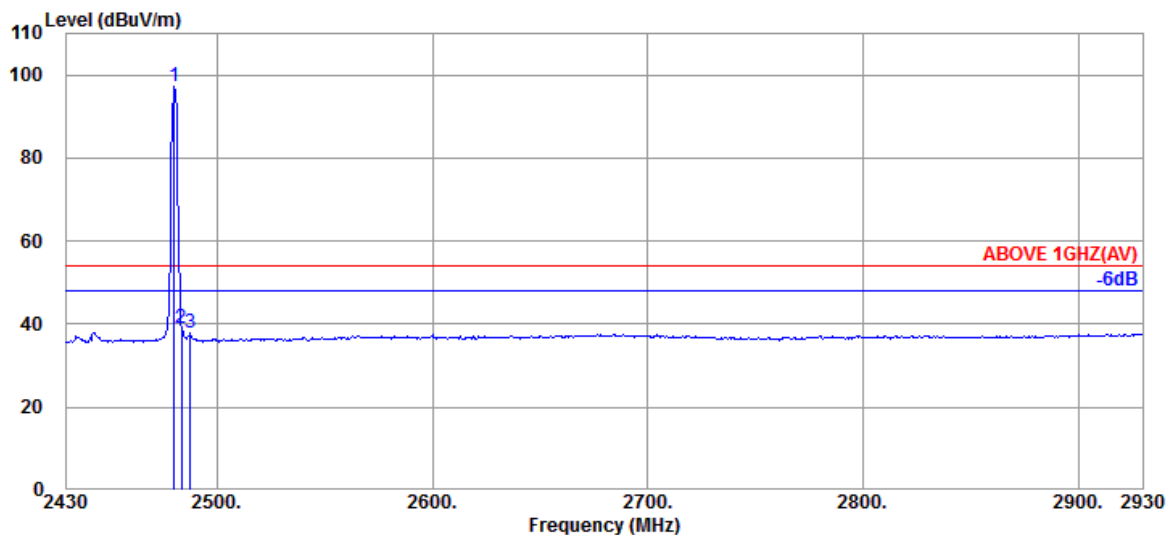

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	102.73	97.25	---	---	Average
2483.500	28.60	5.83	39.91	44.38	38.90	54.00	15.10	Average
2487.500	28.60	5.86	39.91	43.26	37.81	54.00	16.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

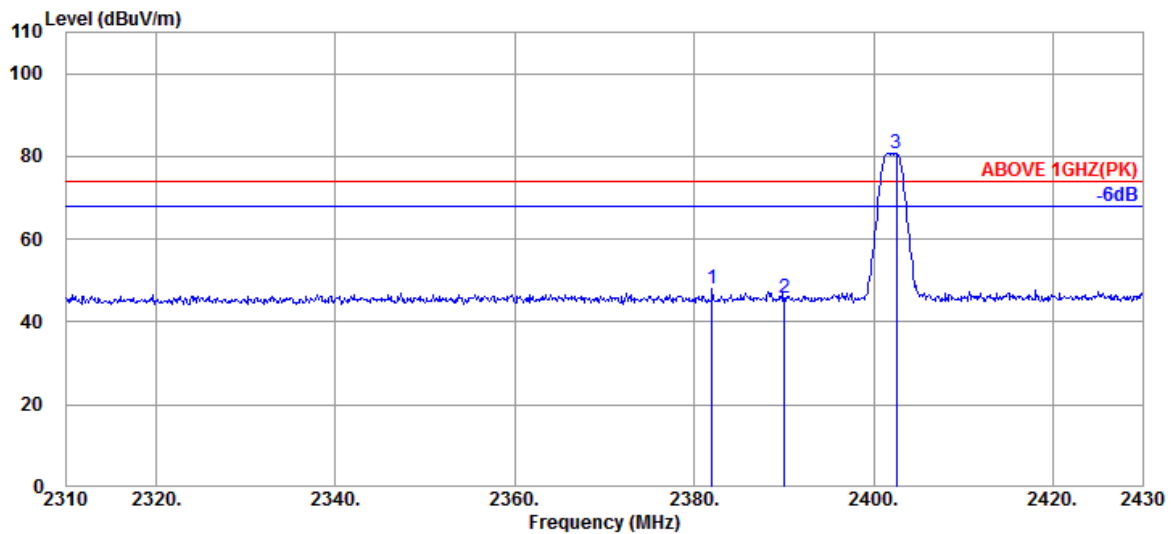

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.000	28.26	5.68	39.91	53.85	47.88	74.00	26.12	Peak
2390.040	28.27	5.70	39.91	51.70	45.76	74.00	28.24	Peak
@ 2402.520	28.30	5.73	39.91	86.70	80.82	---	---	Peak

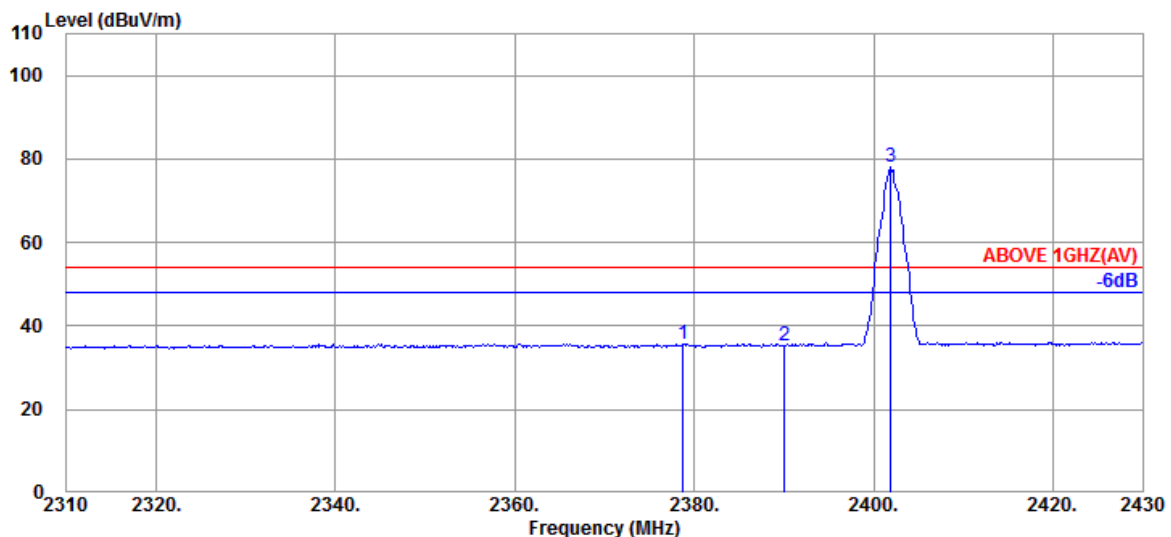

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.760	28.26	5.68	39.91	41.76	35.79	54.00	18.21	Average
2390.040	28.27	5.70	39.91	41.36	35.42	54.00	18.58	Average
@ 2401.920	28.30	5.70	39.91	84.12	78.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010182


Report Number: EM-F200504

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

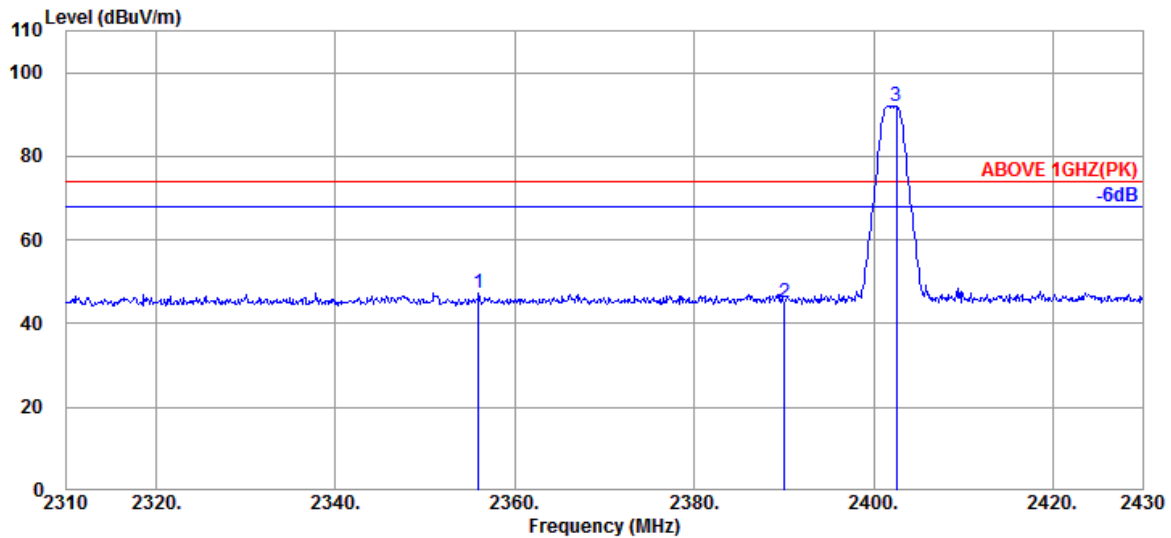

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.960	28.20	5.65	39.91	53.25	47.19	74.00	26.81	Peak
2390.040	28.27	5.70	39.91	51.16	45.22	74.00	28.78	Peak
@ 2402.520	28.30	5.73	39.91	97.97	92.09	---	---	Peak

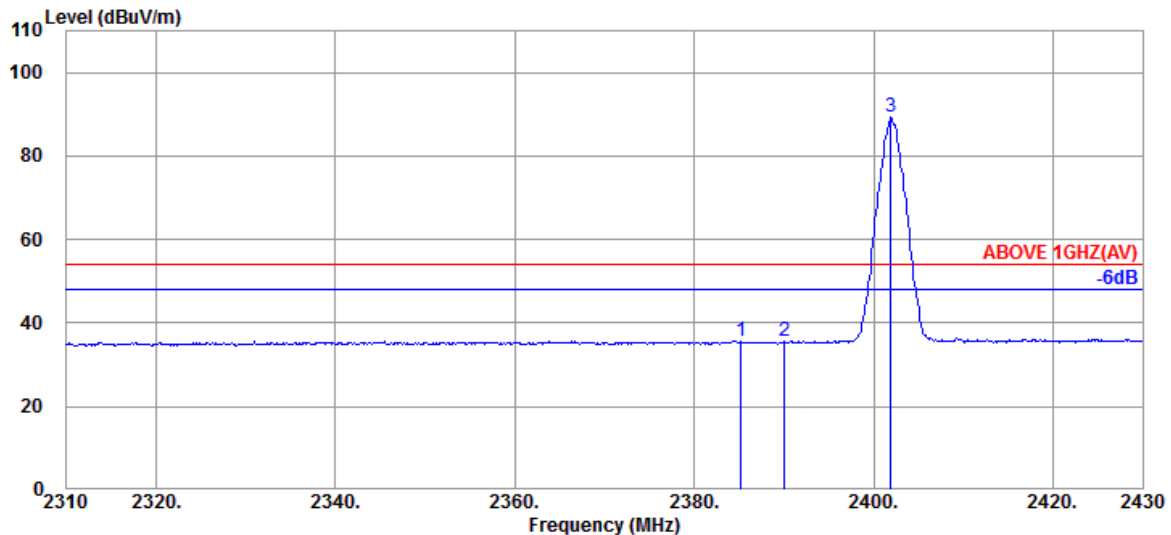

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.240	28.27	5.68	39.91	41.63	35.67	54.00	18.33	Average
2390.040	28.27	5.70	39.91	41.45	35.51	54.00	18.49	Average
@ 2401.920	28.30	5.70	39.91	95.17	89.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

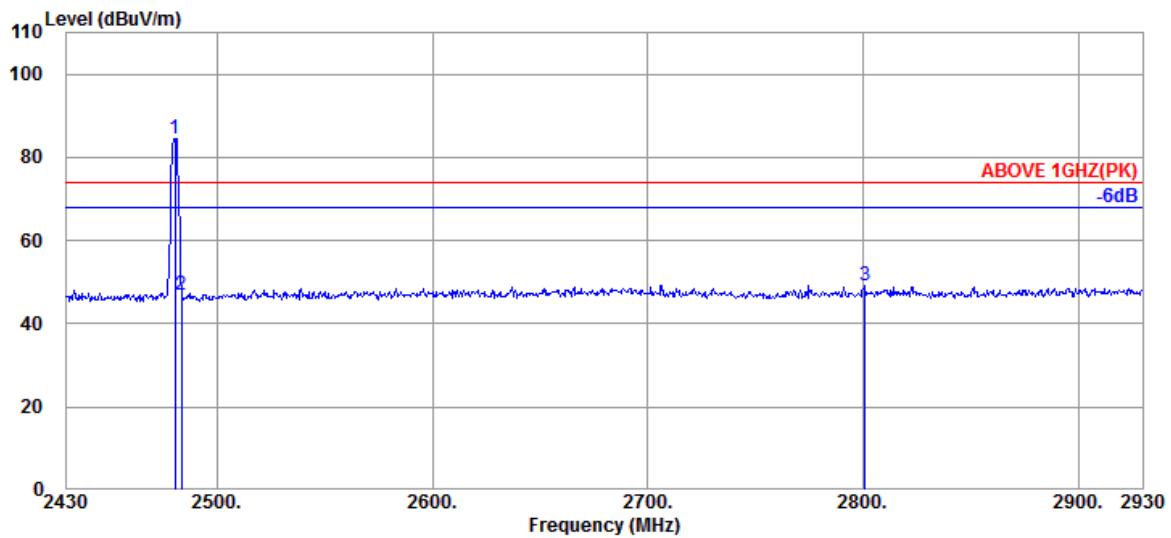

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	90.05	84.57	---	---	Peak
2483.500	28.60	5.83	39.91	52.39	46.91	74.00	27.09	Peak
2801.000	29.20	6.24	39.98	53.75	49.21	74.00	24.79	Peak

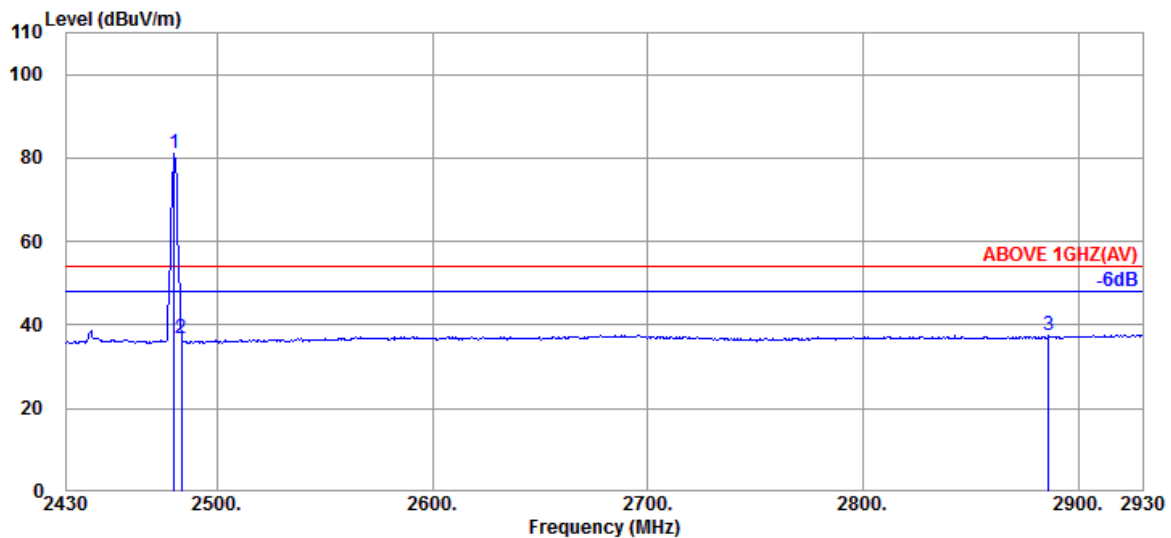

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	86.71	81.23	---	---	Average
2483.500	28.60	5.83	39.91	42.09	36.61	54.00	17.39	Average
2886.500	29.57	6.34	40.00	41.80	37.71	54.00	16.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

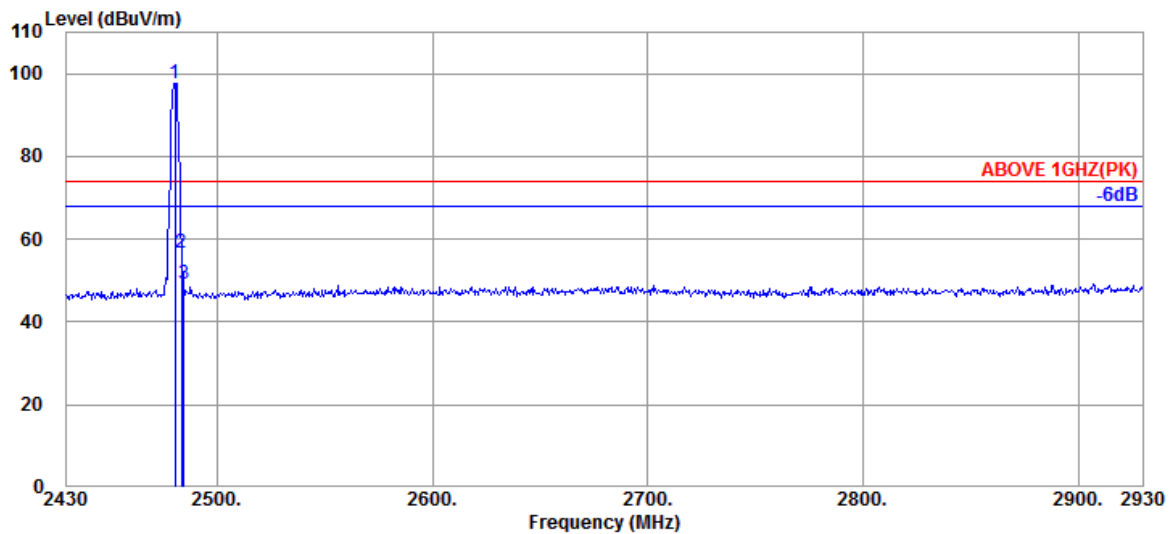

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	103.09	97.61	---	---	Peak
2483.500	28.60	5.83	39.91	62.27	56.79	74.00	17.21	Peak
2484.500	28.60	5.83	39.91	54.53	49.05	74.00	24.95	Peak

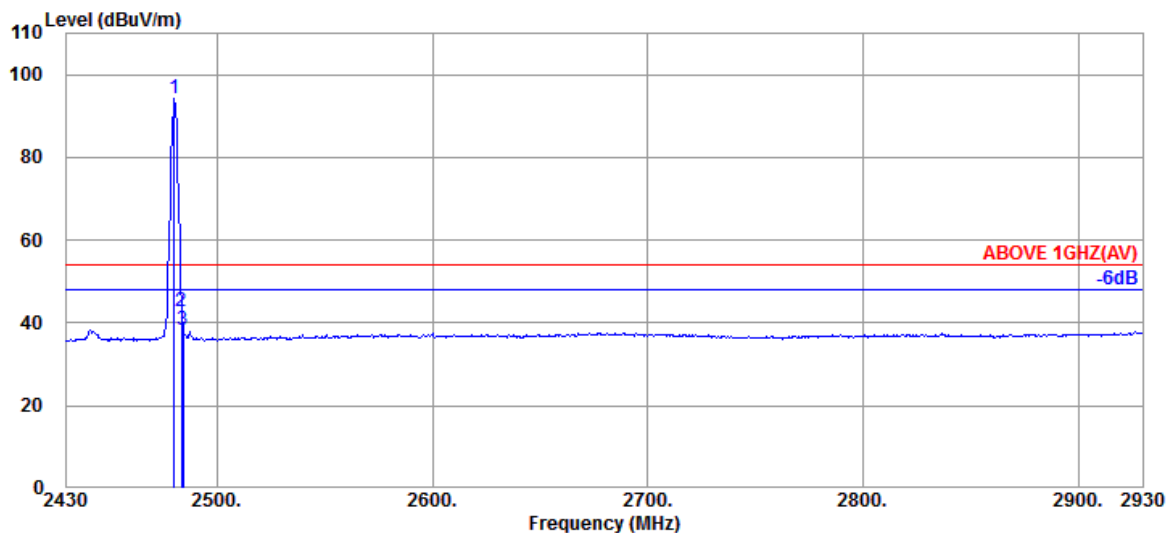

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	99.68	94.20	---	---	Average
2483.500	28.60	5.83	39.91	48.16	42.68	54.00	11.32	Average
2484.000	28.60	5.83	39.91	43.74	38.26	54.00	15.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.23	46.66	54.00	7.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	47.59	50.02	54.00	3.98	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	43.94	46.37	54.00	7.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	45.52	47.95	54.00	6.05	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.92	47.35	54.00	6.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.05	46.48	54.00	7.52	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4894.000	33.52	8.21	39.28	46.07	48.52	54.00	5.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4894.000	33.52	8.21	39.28	44.54	46.99	54.00	7.01	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	43.91	46.34	54.00	7.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.00	46.43	54.00	7.57	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.27	46.70	54.00	7.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.82	47.25	54.00	6.75	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.40	8.17	39.33	43.36	45.60	54.00	8.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.40	8.17	39.33	43.48	45.72	54.00	8.28	Peak

Mode	BLE (1M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.45	8.20	39.29	45.51	47.87	54.00	6.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.45	8.20	39.29	44.94	47.30	54.00	6.70	Peak

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.24	39.25	44.40	47.11	54.00	6.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.24	39.25	44.52	47.23	54.00	6.77	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 6dB/OCCUPIED BANDWIDTH

Test Date	2019/09/19 ~ 25	Temp./Hum.	24~25°C / 50~54%
Cable Loss	0.5dB	Tested By	Martin Chen
Test Voltage	AC 120V, 60Hz (via AC Adapter)		


A.3.1 Emission Bandwidth Result


Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11b	2412	10.14	13.386	>500kHz
	2442	10.14	13.444	
	2462	10.14	13.398	
	2472	10.14	13.854	
802.11g	2412	16.38	16.607	
	2442	16.40	16.800	
	2462	16.38	16.678	
	2472	16.38	16.370	
802.11n-HT20	2412	17.62	17.781	
	2442	17.62	17.812	
	2462	17.62	17.794	
	2472	17.62	17.594	
802.11n-HT40	2422	36.40	36.208	
	2442	36.40	36.231	
	2452	36.36	36.187	
	2462	36.36	36.106	
802.11ax-HE20	2412	18.98	18.978	
	2442	18.85	18.988	
	2462	18.85	19.011	
	2472	18.63	18.708	
802.11ax-HE40	2422	38.01	37.753	
	2442	38.02	37.729	
	2452	38.03	37.740	
	2462	37.77	37.474	


Mode	RU Configuration	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11ax-HE20	26/0	2412	2.063	18.272	>500kHz
	52/37		14.48	18.129	
	106/53		17.19	18.198	
	26/8	2472	2.032	18.036	
	52/40		16.96	17.940	
	106/54		17.04	17.965	
802.11ax-HE40	242/61	2422	18.88	18.740	
	242/62	2462	18.58	18.513	

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE	2402	0.6760	1.0648	>500kHz
	2440	0.6844	1.0613	
	2480	0.6956	1.0633	

A.3.2 Measurement Plots

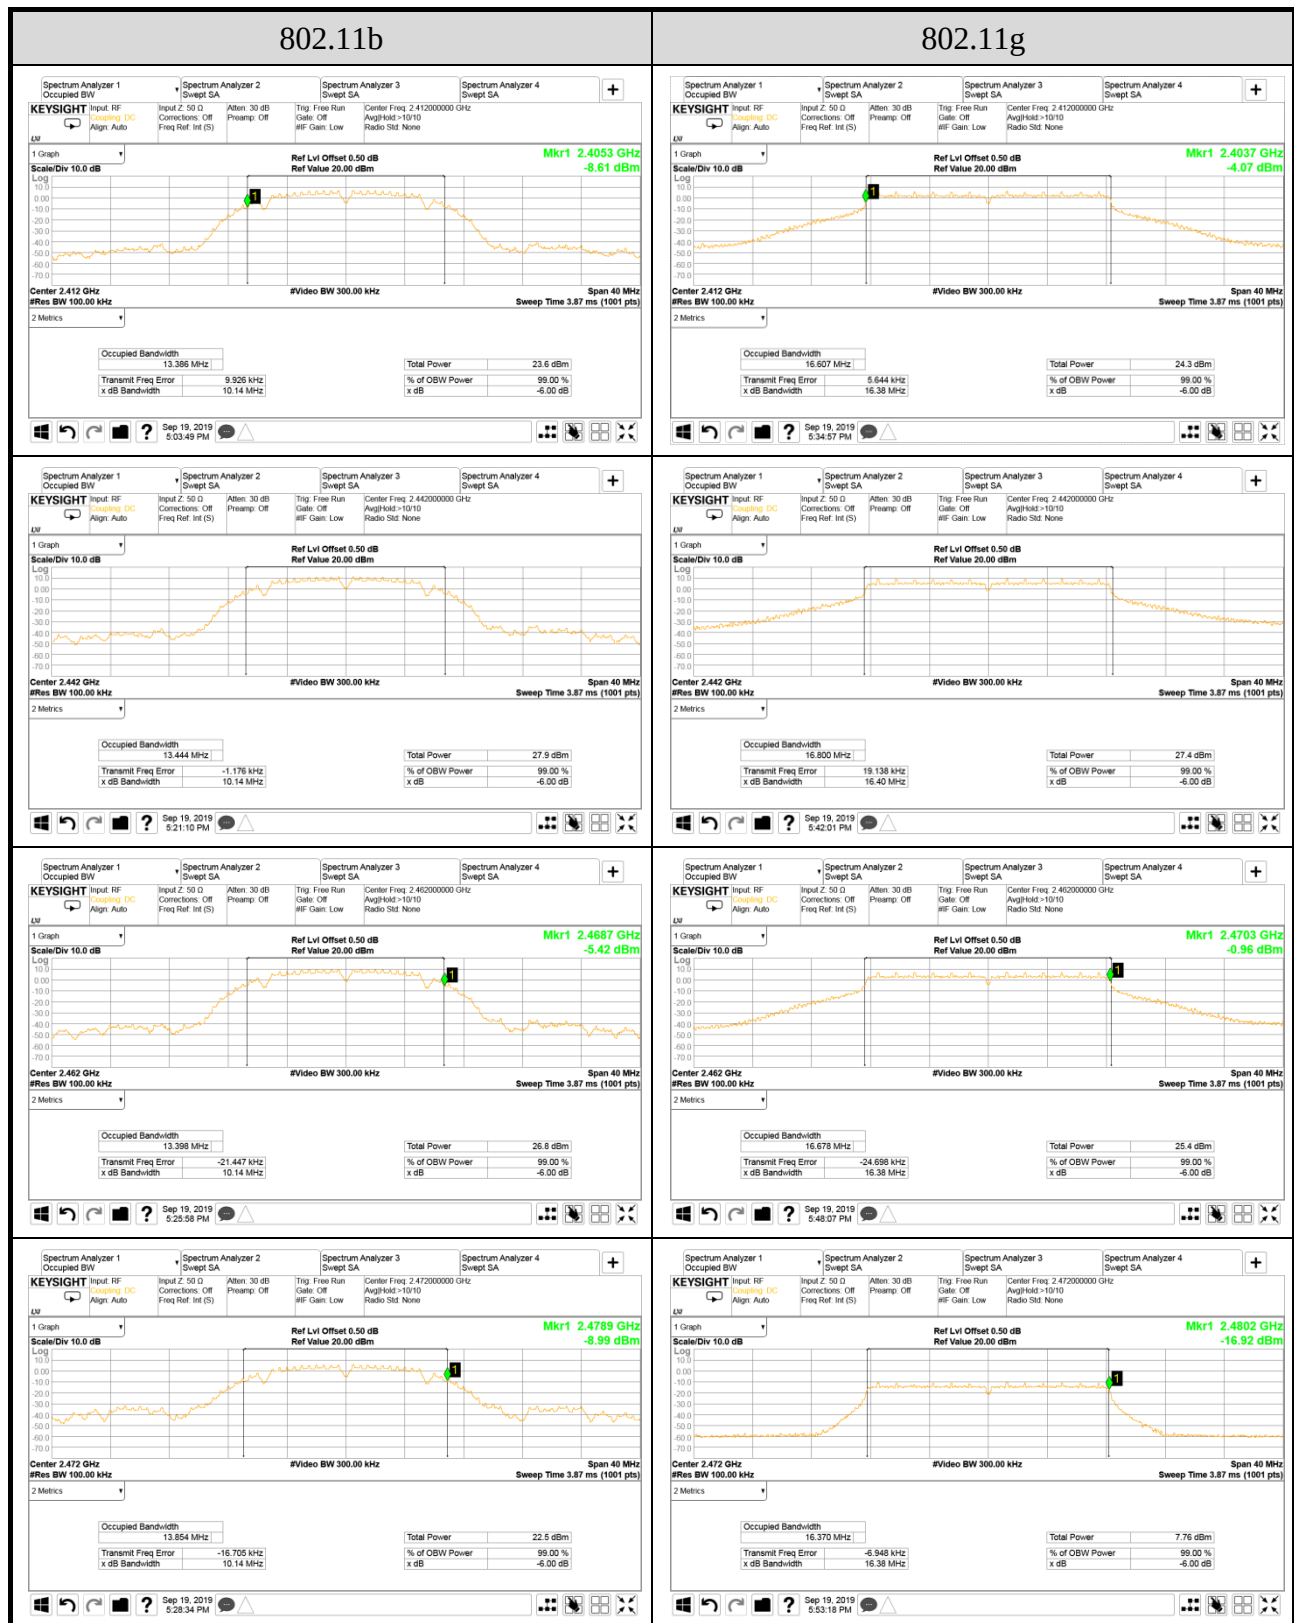


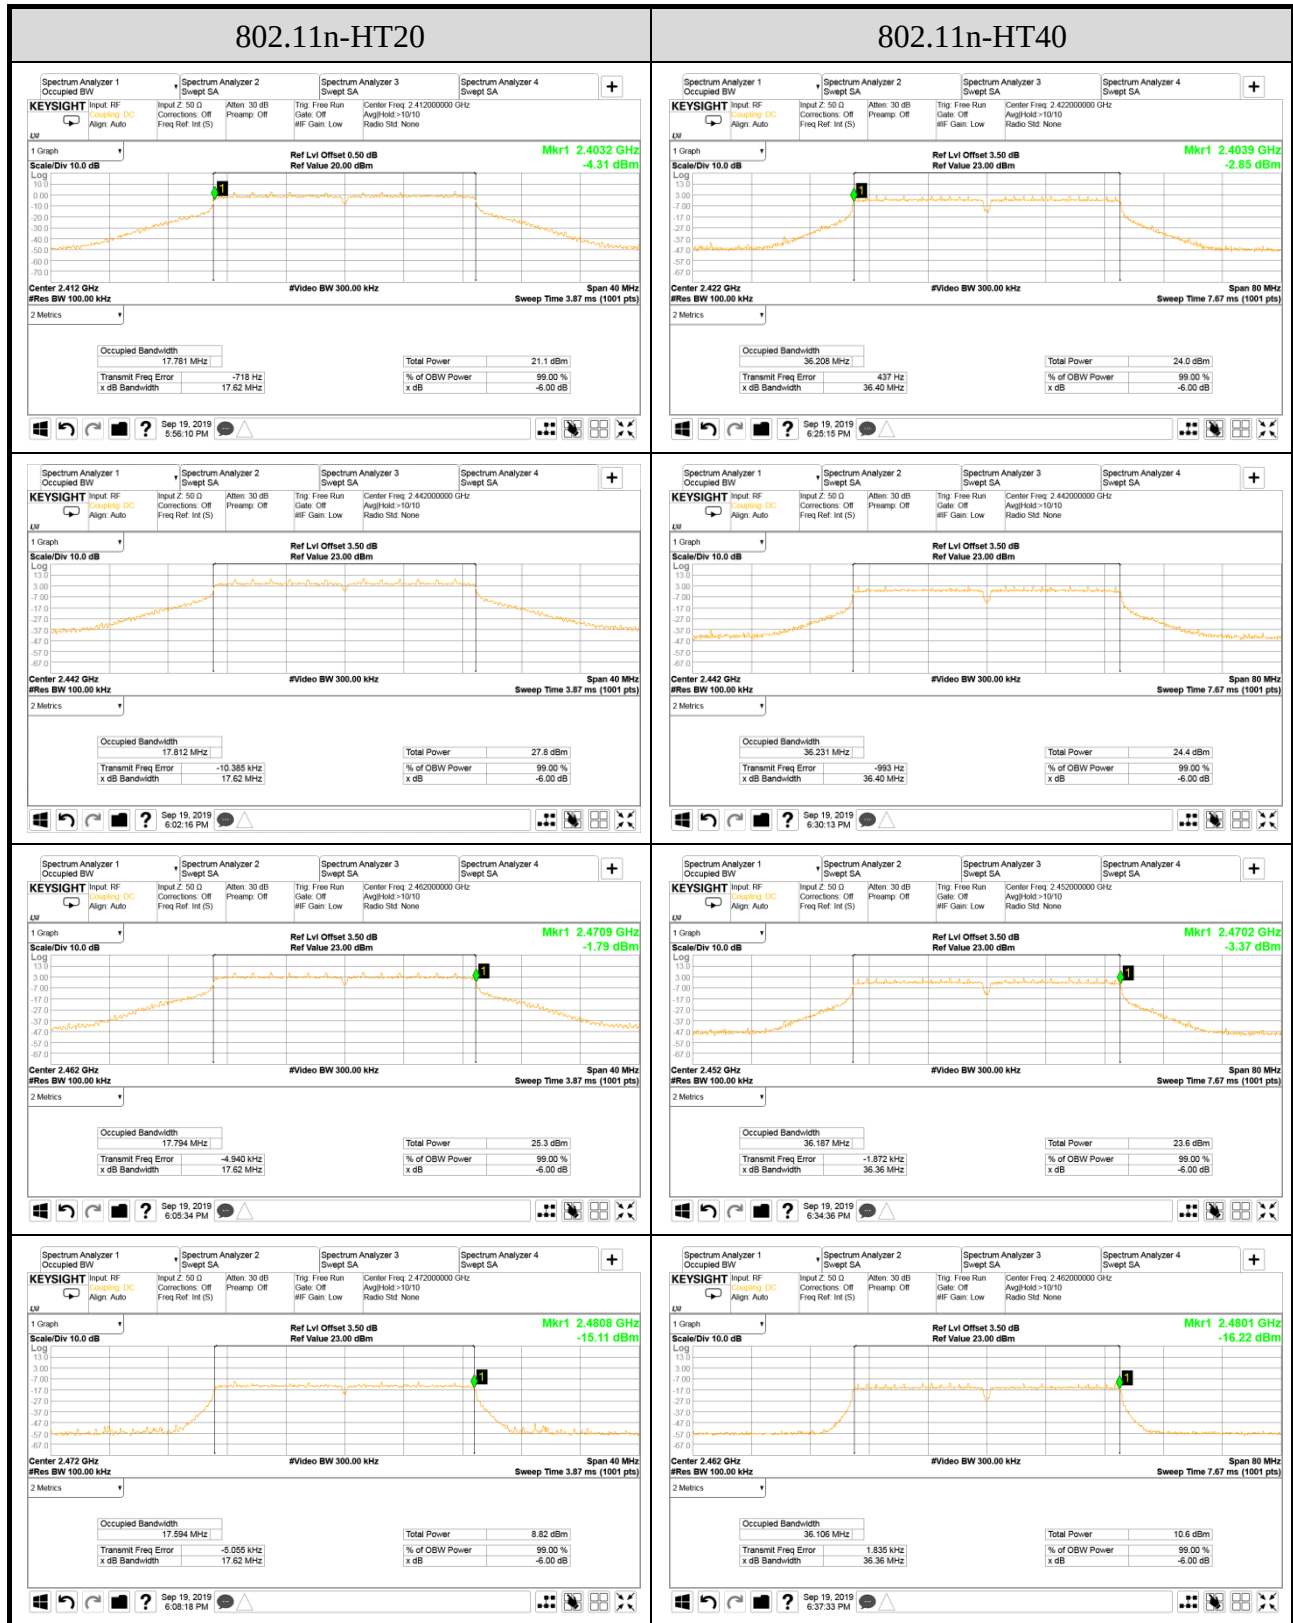

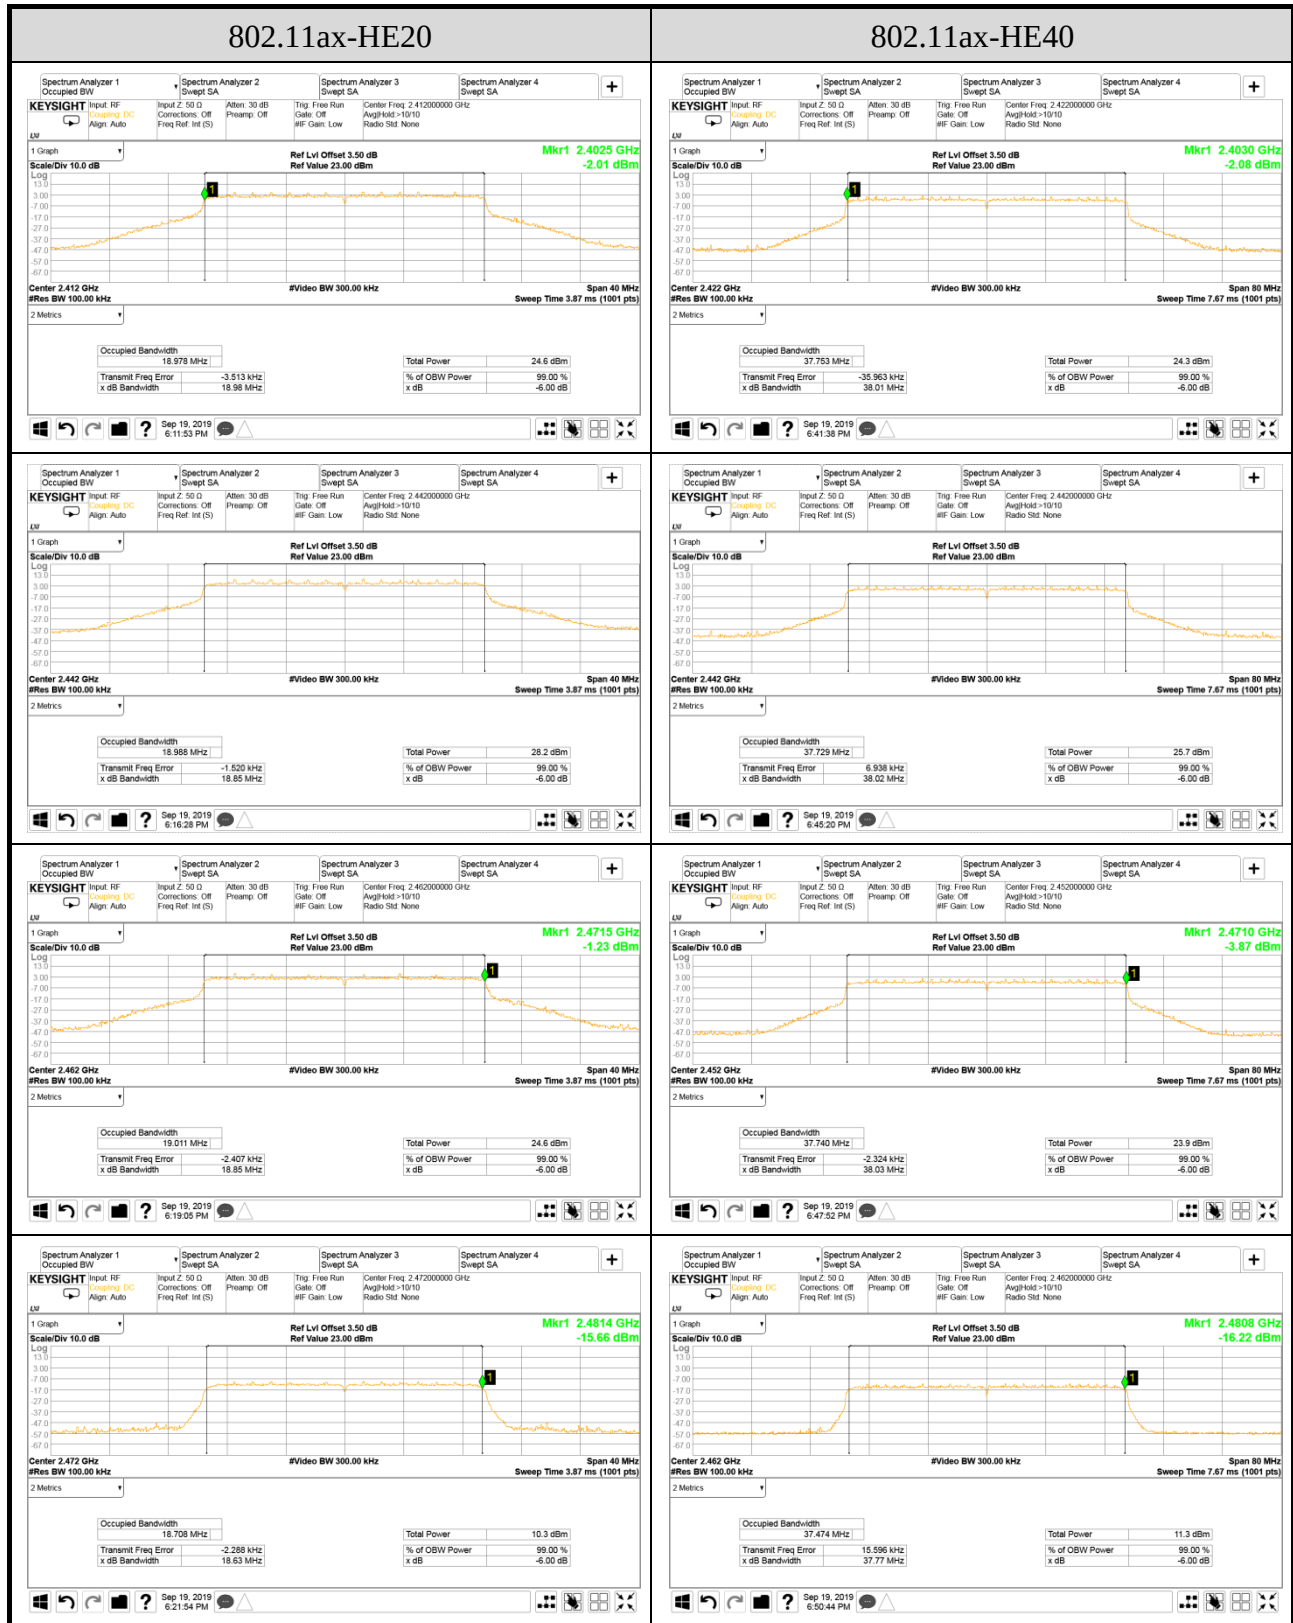


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

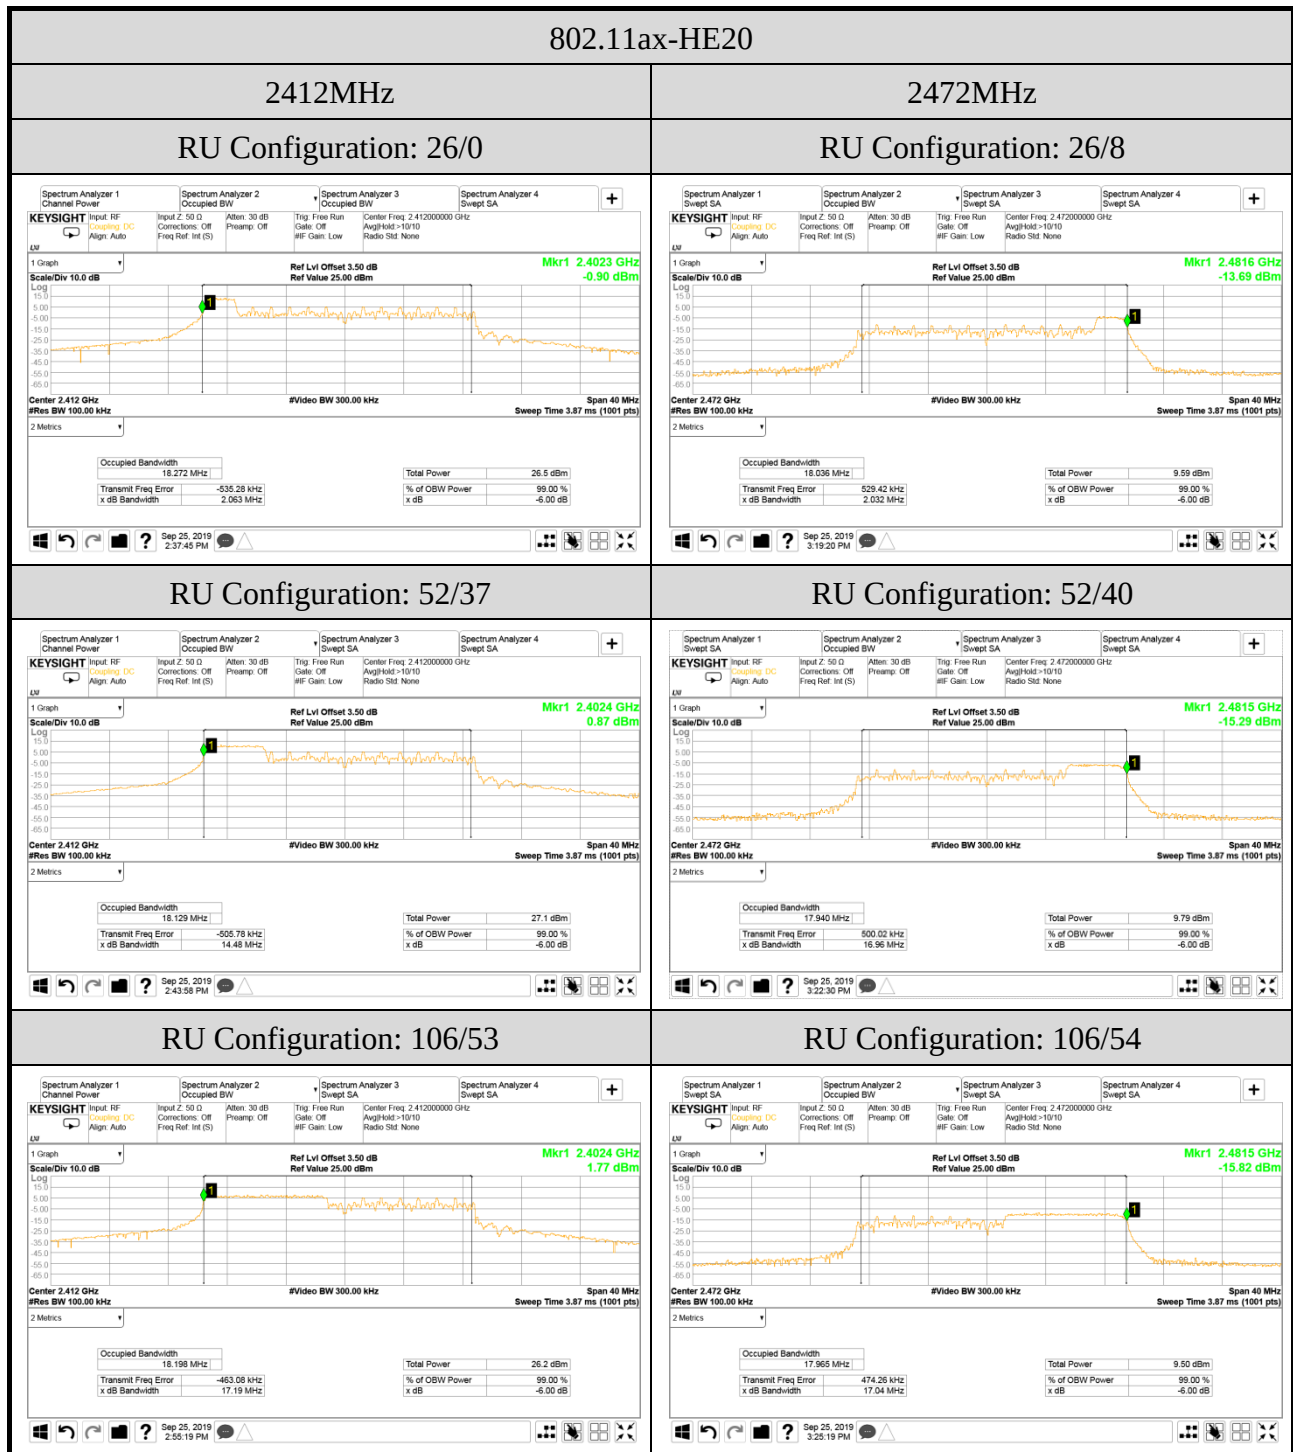

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

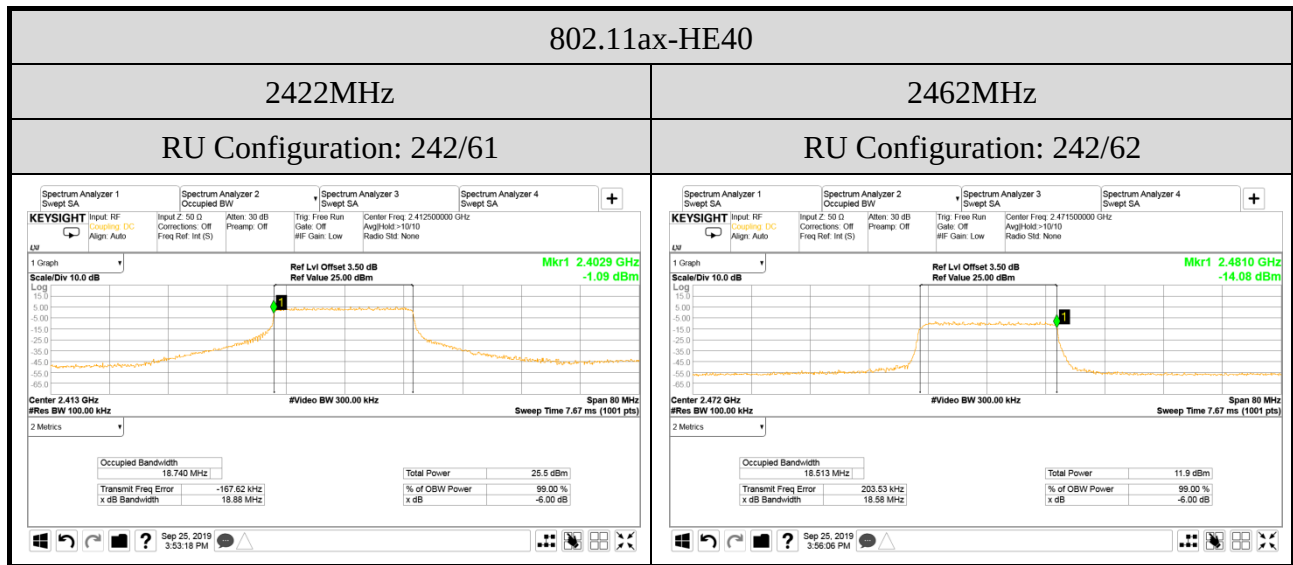

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

