

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

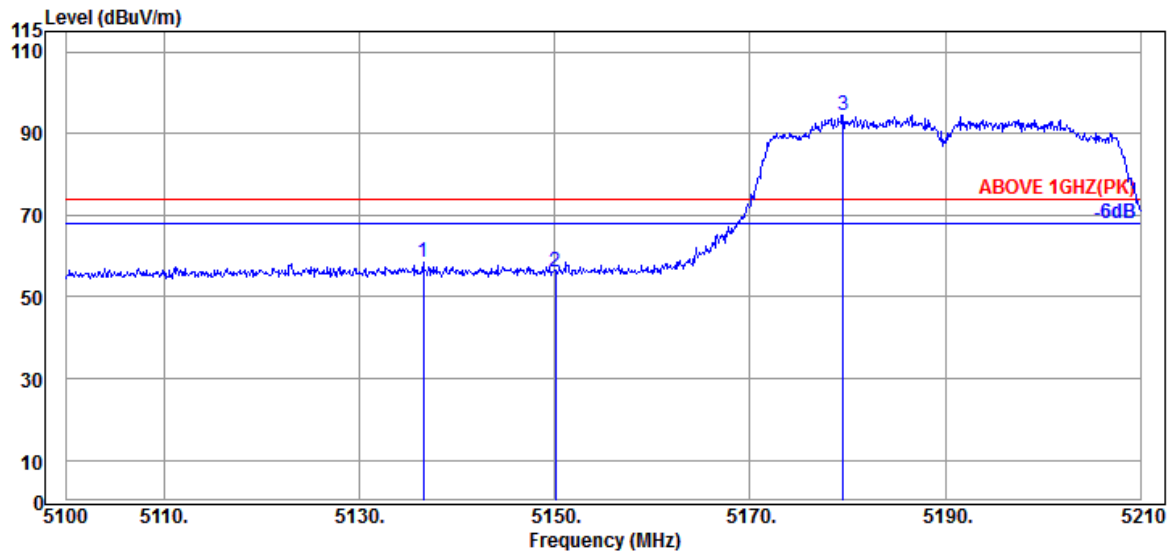

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.520	34.40	8.88	34.34	49.50	58.44	74.00	15.56	Peak
5150.050	34.50	8.88	34.34	47.18	56.22	74.00	17.78	Peak
@ 5179.530	34.63	8.90	34.32	85.35	94.56	---	---	Peak

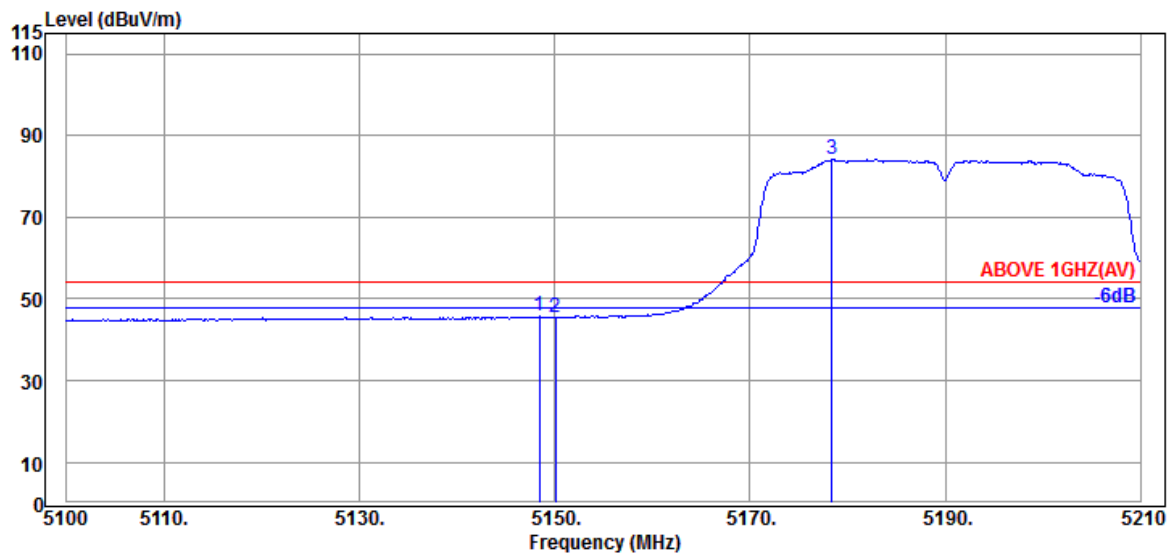

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	34.50	8.88	34.34	36.64	45.68	54.00	8.32	Average
5150.050	34.50	8.88	34.34	36.26	45.30	54.00	8.70	Average
@ 5178.430	34.63	8.90	34.32	74.89	84.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

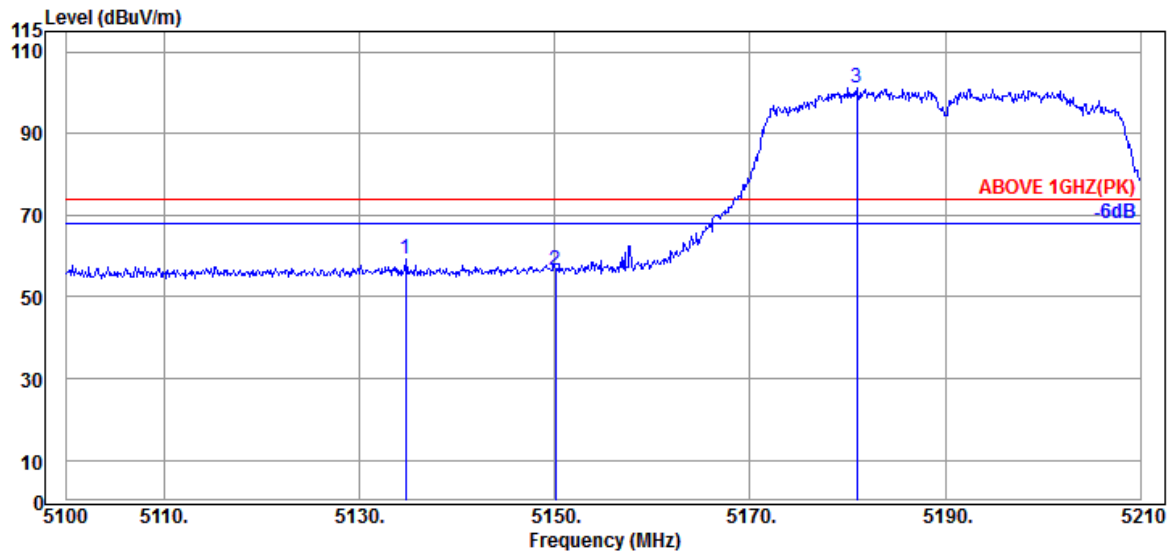

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.760	34.40	8.88	34.34	50.18	59.12	74.00	14.88	Peak
5150.050	34.50	8.88	34.34	47.42	56.46	74.00	17.54	Peak
@ 5180.960	34.63	8.90	34.32	91.85	101.06	---	---	Peak

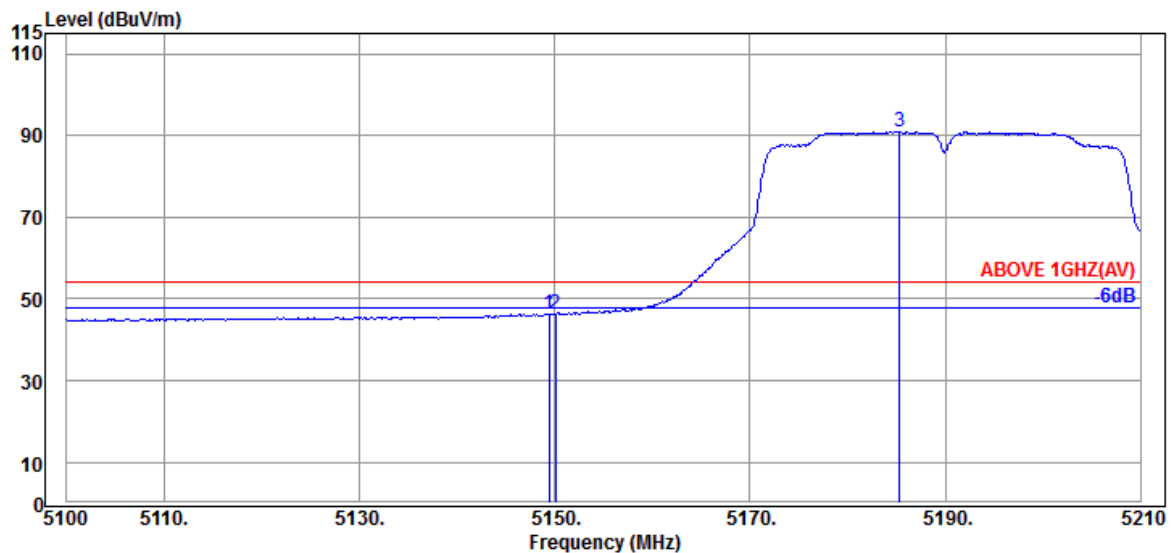

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.50	8.88	34.34	37.24	46.28	54.00	7.72	Average
5150.050	34.50	8.88	34.34	37.29	46.33	54.00	7.67	Average
@ 5185.360	34.63	8.90	34.32	81.72	90.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

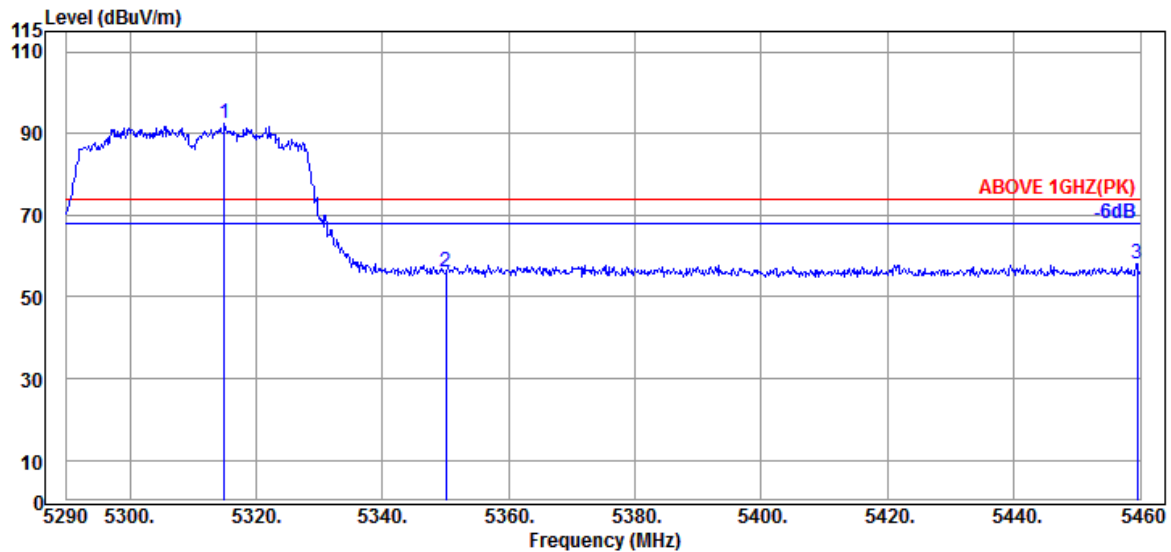

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.990	34.57	8.98	34.27	83.12	92.40	---	---	Peak
5350.010	34.90	8.99	34.26	46.31	55.94	74.00	18.06	Peak
5459.490	34.60	9.05	34.21	48.78	58.22	74.00	15.78	Peak

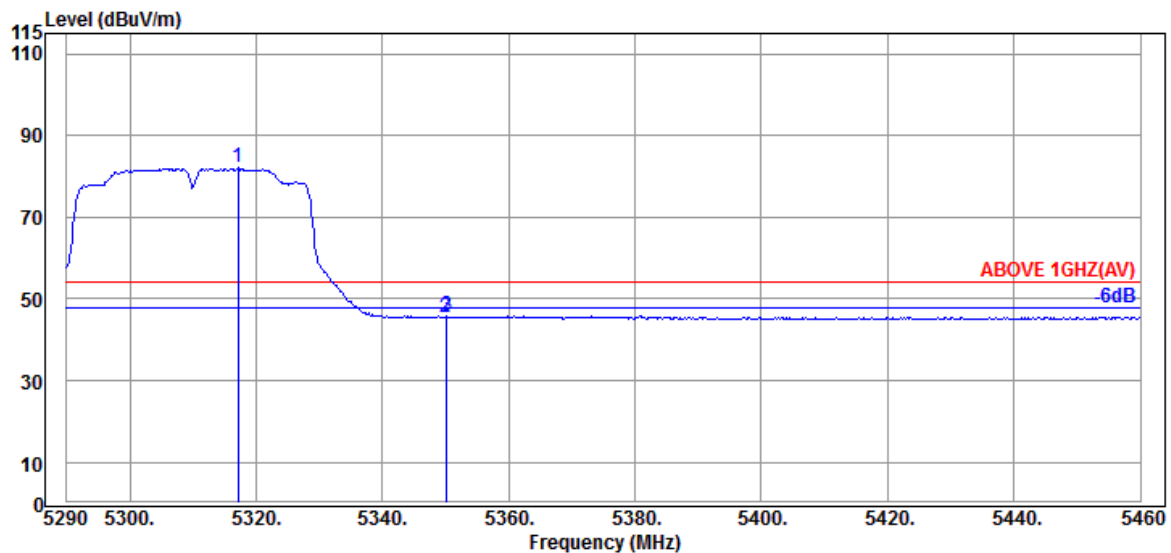

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.57	8.98	34.27	72.74	82.02	---	---	Average
5350.010	34.90	8.99	34.26	35.80	45.43	54.00	8.57	Average
5350.180	34.90	8.99	34.26	36.11	45.74	54.00	8.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

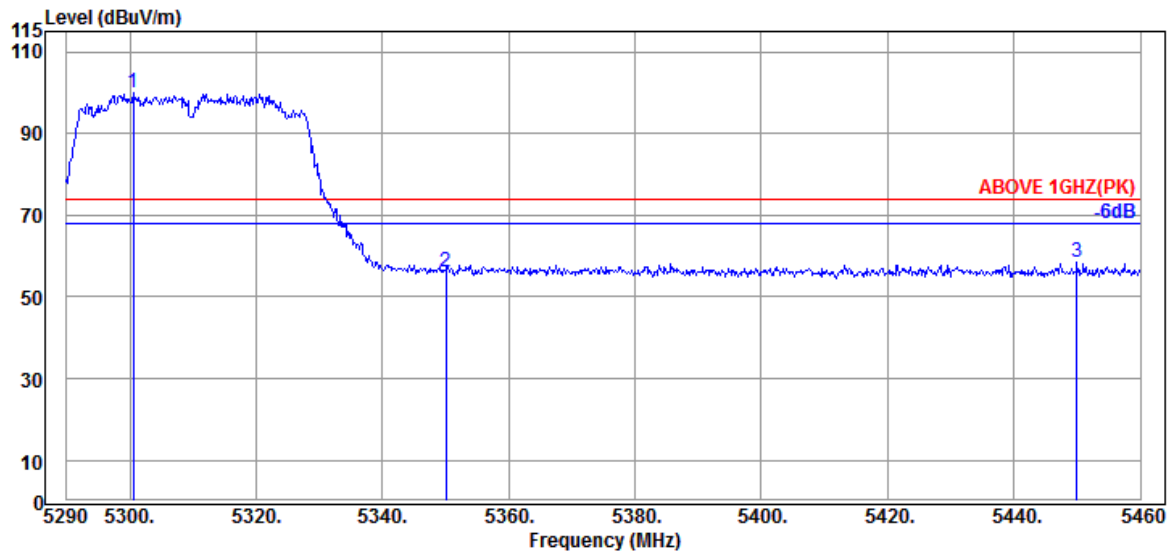

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.540	34.40	8.97	34.28	90.93	100.02	---	---	Peak
5350.010	34.90	8.99	34.26	46.46	56.09	74.00	17.91	Peak
5449.970	34.60	9.05	34.22	48.93	58.36	74.00	15.64	Peak

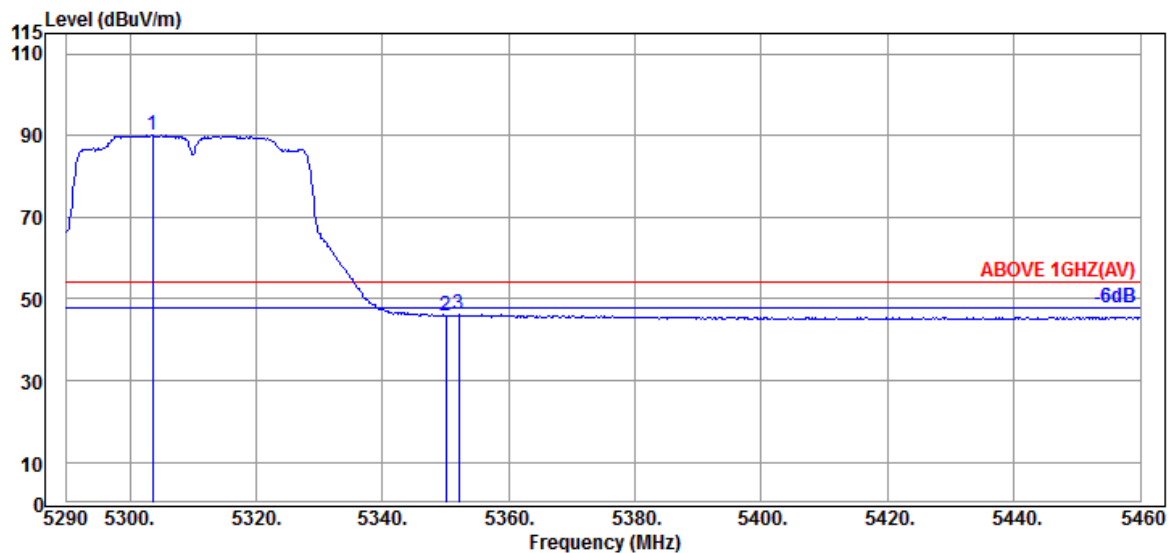

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.600	34.40	8.97	34.28	81.08	90.17	---	---	Average
5350.010	34.90	8.99	34.26	36.38	46.01	54.00	7.99	Average
5352.050	34.90	8.99	34.26	36.49	46.12	54.00	7.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

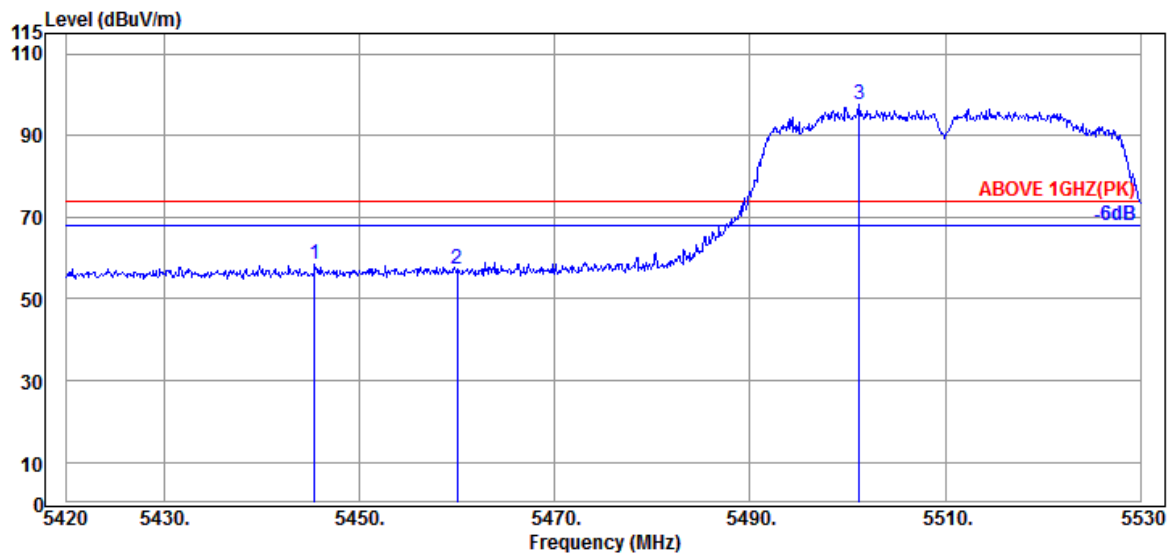

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.410	34.65	9.04	34.22	48.86	58.33	74.00	15.67	Peak
5460.040	34.60	9.05	34.21	47.96	57.40	74.00	16.60	Peak
@ 5501.180	34.70	9.08	34.20	87.99	97.57	---	---	Peak

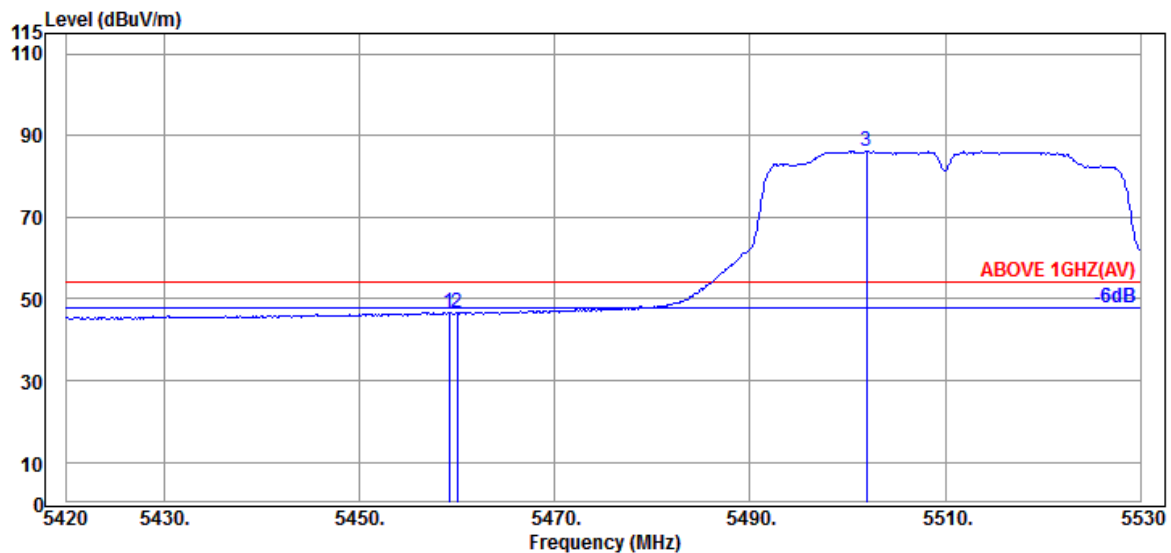

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.160	34.60	9.05	34.21	37.29	46.73	54.00	7.27	Average
5460.040	34.60	9.05	34.21	37.20	46.64	54.00	7.36	Average
@ 5501.950	34.70	9.08	34.20	76.55	86.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

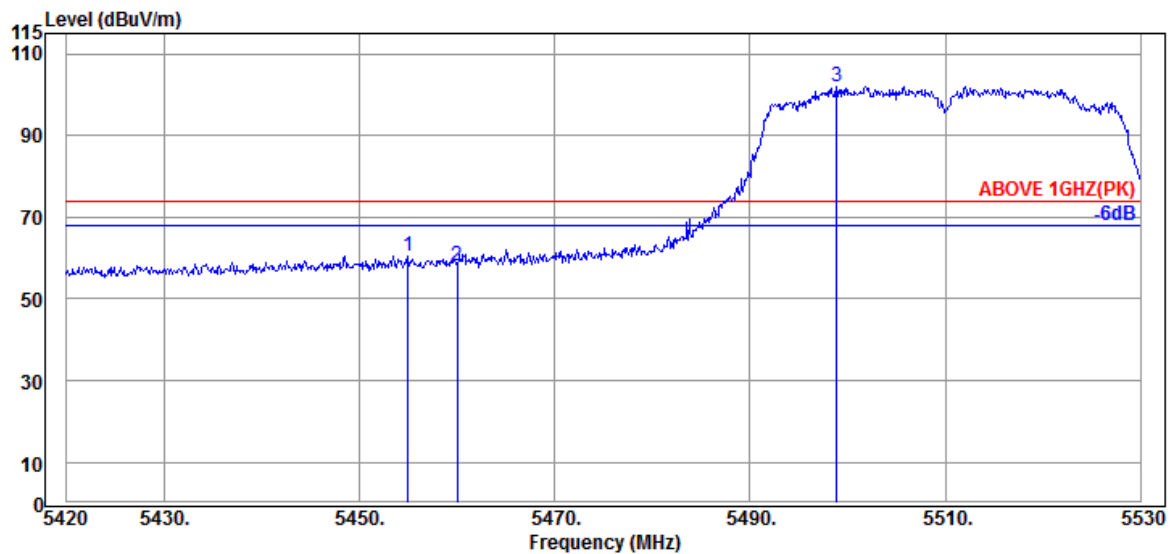

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.980	34.60	9.05	34.21	50.96	60.40	74.00	13.60	Peak
5460.040	34.60	9.05	34.21	48.79	58.23	74.00	15.77	Peak
@ 5498.870	34.70	9.08	34.20	92.32	101.90	---	---	Peak

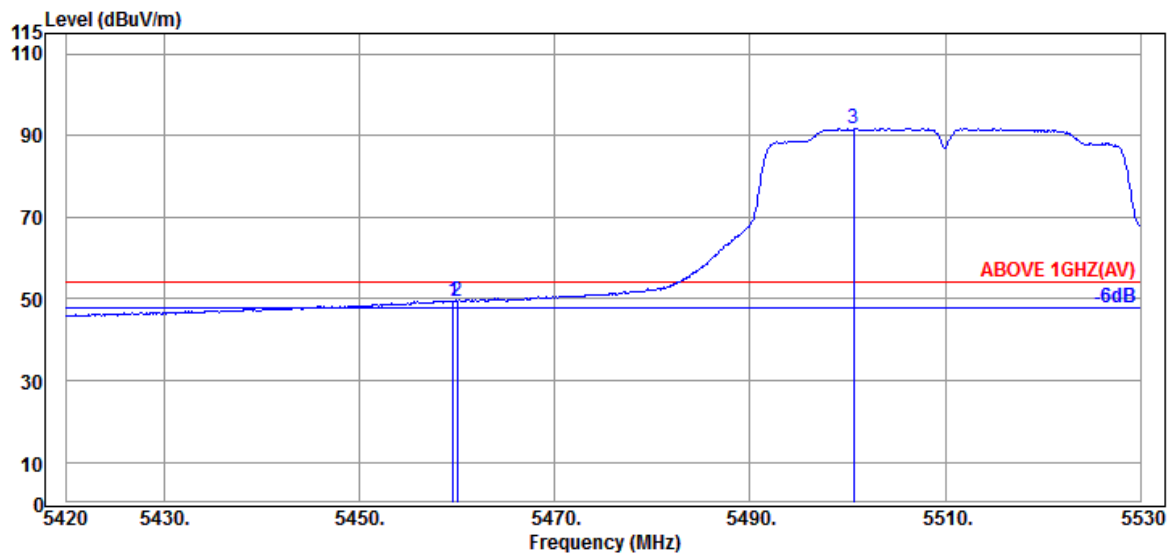

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.60	9.05	34.21	40.10	49.54	54.00	4.46	Average
5460.040	34.60	9.05	34.21	40.06	49.50	54.00	4.50	Average
@ 5500.630	34.70	9.08	34.20	82.17	91.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

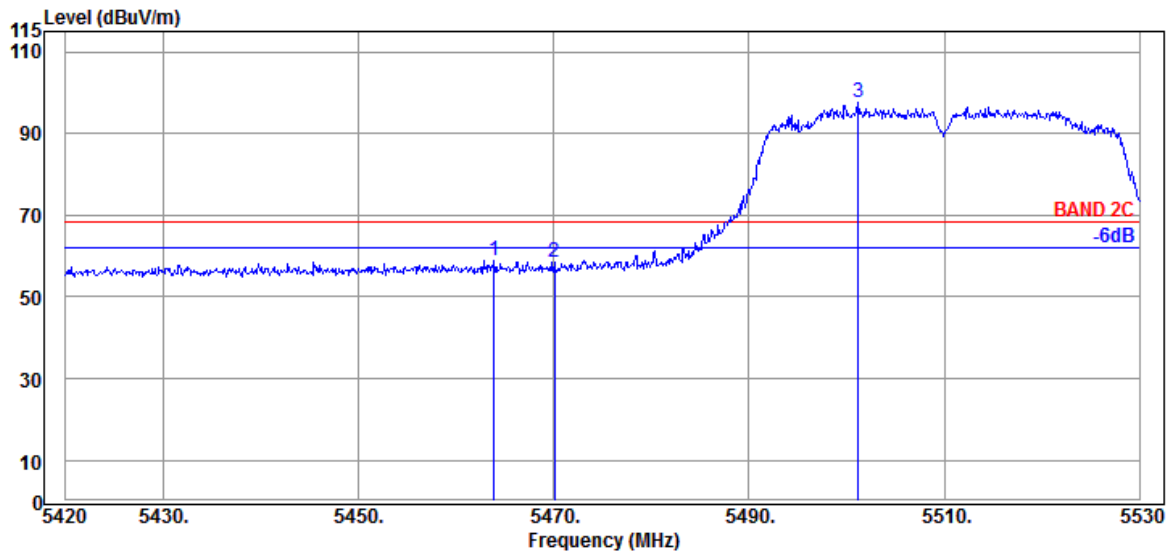

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.890	34.63	9.06	34.21	49.36	58.84	68.20	9.36	Peak
5470.050	34.63	9.06	34.21	49.00	58.48	68.20	9.72	Peak
@ 5501.180	34.70	9.08	34.20	87.99	97.57	---	---	Peak

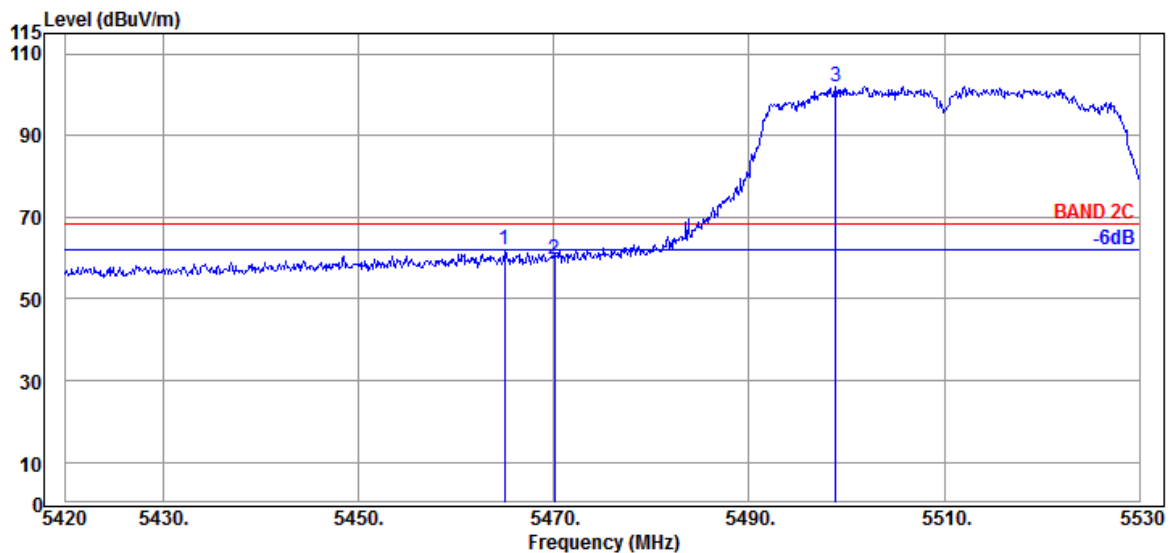

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.990	34.63	9.06	34.21	52.40	61.88	68.20	6.32	Peak
5470.050	34.63	9.06	34.21	50.27	59.75	68.20	8.45	Peak
@ 5498.870	34.70	9.08	34.20	92.32	101.90	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

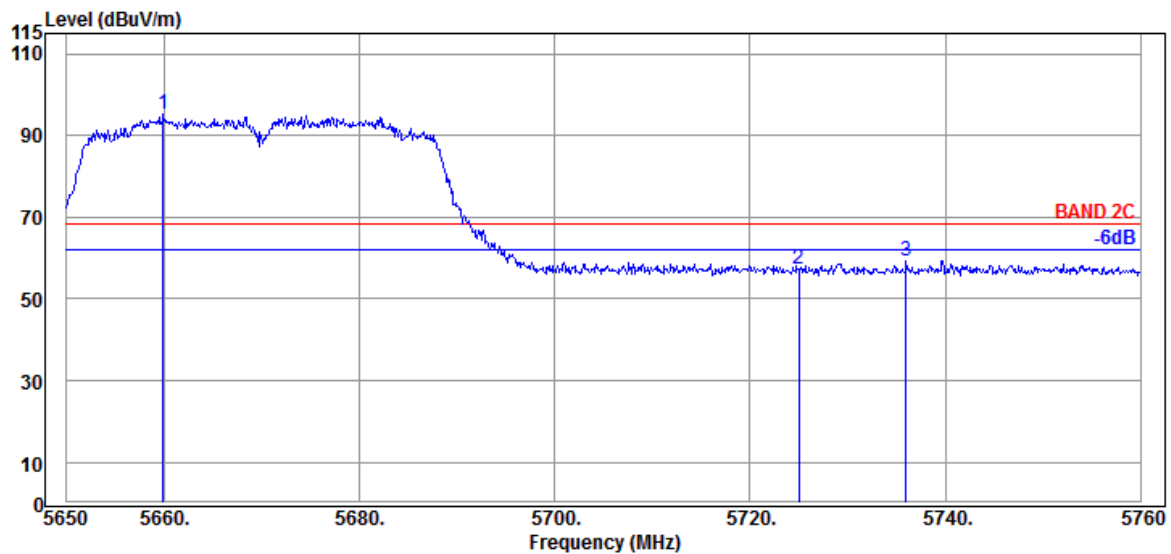

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5659.900	34.57	9.16	34.28	85.64	95.09	---	---	Peak
	5725.020	34.90	9.20	34.30	47.70	57.50	68.20	10.70	Peak
	5736.020	34.90	9.20	34.31	49.63	59.42	68.20	8.78	Peak

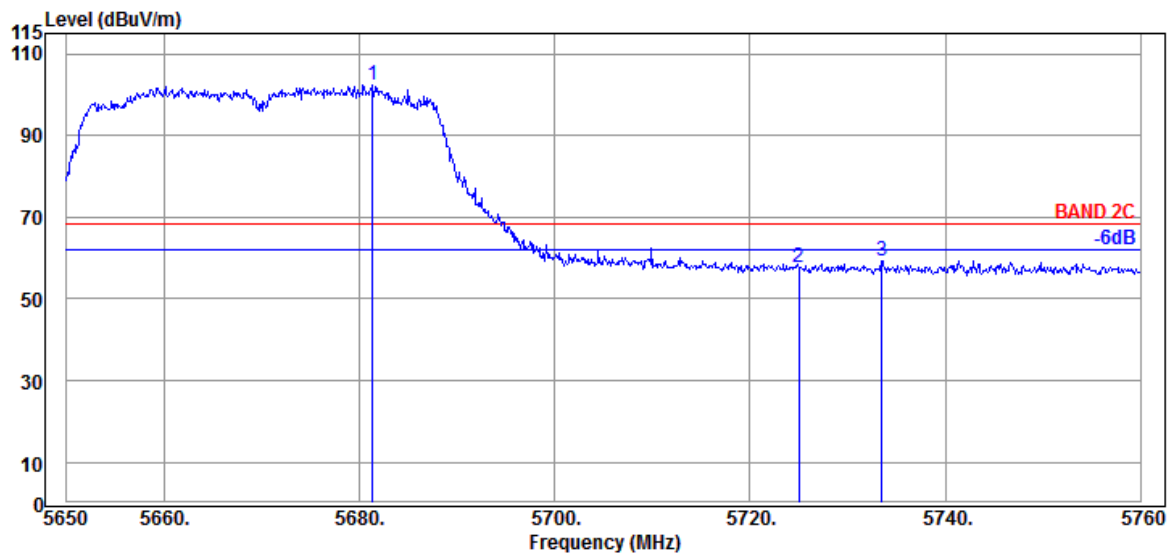

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5681.350	34.63	9.17	34.29	92.88	102.39	---	---	Peak
	5725.020	34.90	9.20	34.30	47.97	57.77	68.20	10.43	Peak
	5733.490	34.90	9.20	34.31	49.51	59.30	68.20	8.90	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

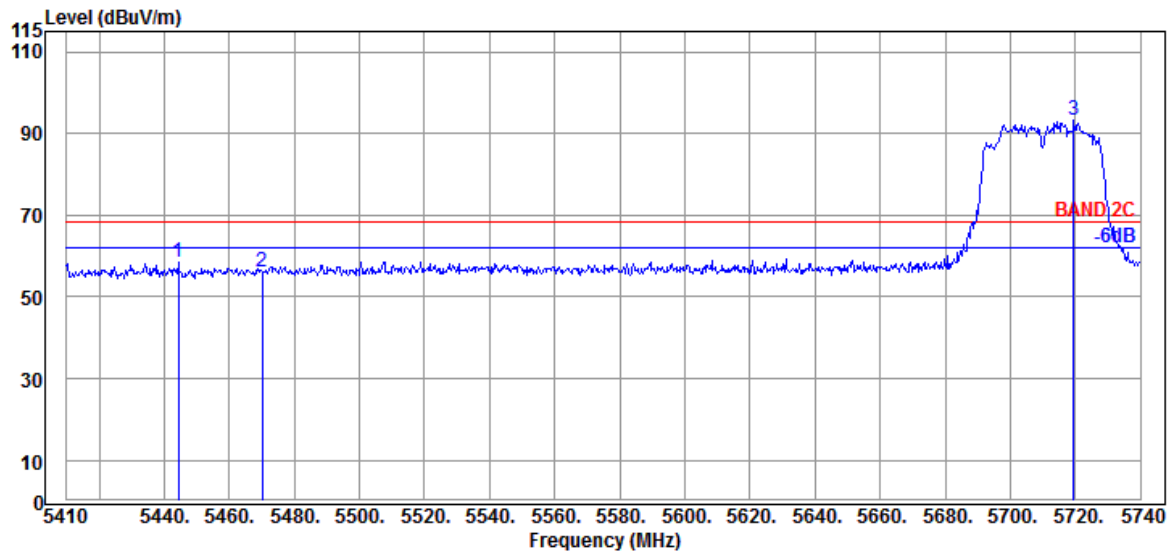

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5444.320	34.65	9.04	34.22	48.90	58.37	68.20	9.83	Peak
	5470.060	34.63	9.06	34.21	46.58	56.06	68.20	12.14	Peak
	5719.540	34.80	9.19	34.30	83.58	93.27	---	---	Peak

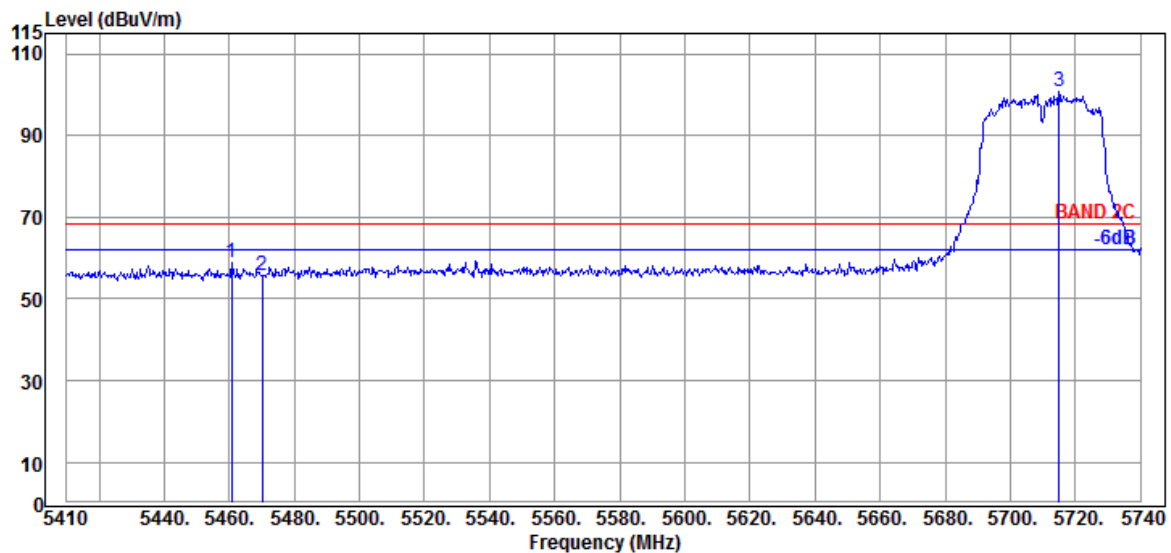

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5460.820	34.60	9.05	34.21	49.25	58.69	68.20	9.51	Peak
	5470.060	34.63	9.06	34.21	46.37	55.85	68.20	12.35	Peak
	5714.920	34.80	9.19	34.30	91.04	100.73	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

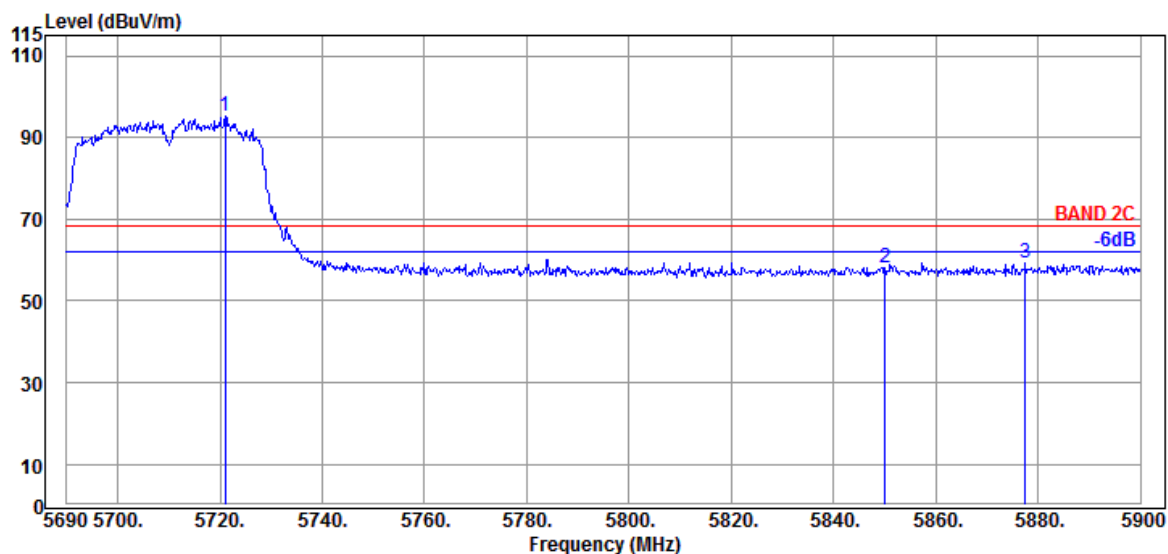

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.080	34.80	9.19	34.30	85.61	95.30	---	---	Peak
5850.020	35.40	9.25	34.36	47.76	58.05	68.20	10.15	Peak
5877.530	35.67	9.27	34.37	48.63	59.20	68.20	9.00	Peak

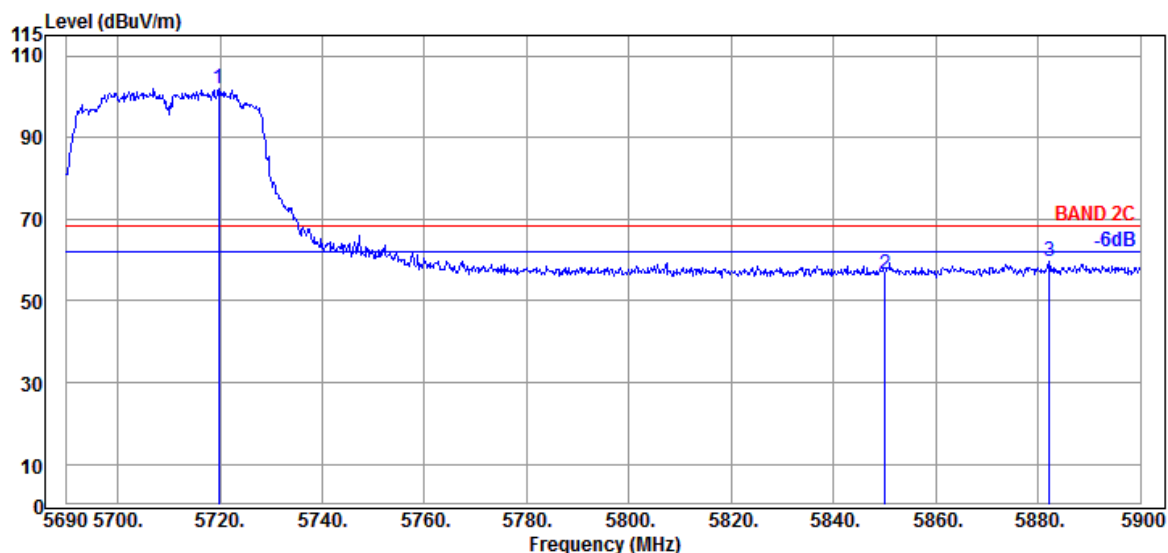

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.820	34.80	9.19	34.30	92.17	101.86	---	---	Peak
5850.020	35.40	9.25	34.36	46.34	56.63	68.20	11.57	Peak
5882.150	35.67	9.27	34.38	48.93	59.49	68.20	8.71	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

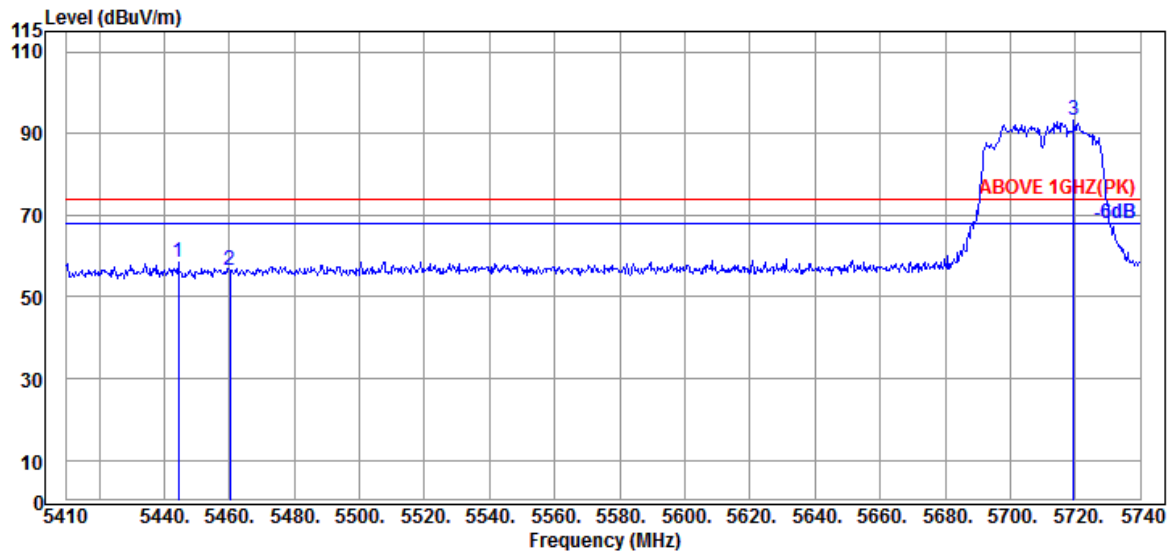

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.320	34.65	9.04	34.22	48.90	58.37	74.00	15.63	Peak
5460.160	34.60	9.05	34.21	47.01	56.45	74.00	17.55	Peak
@ 5719.540	34.80	9.19	34.30	83.58	93.27	---	---	Peak

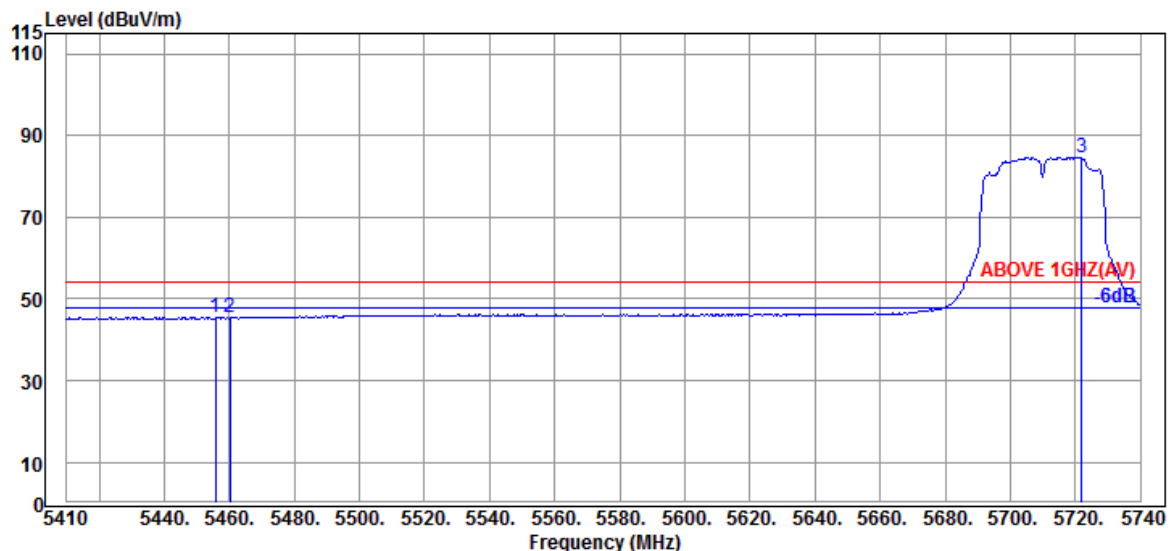

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.870	34.60	9.05	34.21	36.03	45.47	54.00	8.53	Average
5460.160	34.60	9.05	34.21	35.90	45.34	54.00	8.66	Average
@ 5721.850	34.80	9.19	34.30	75.06	84.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

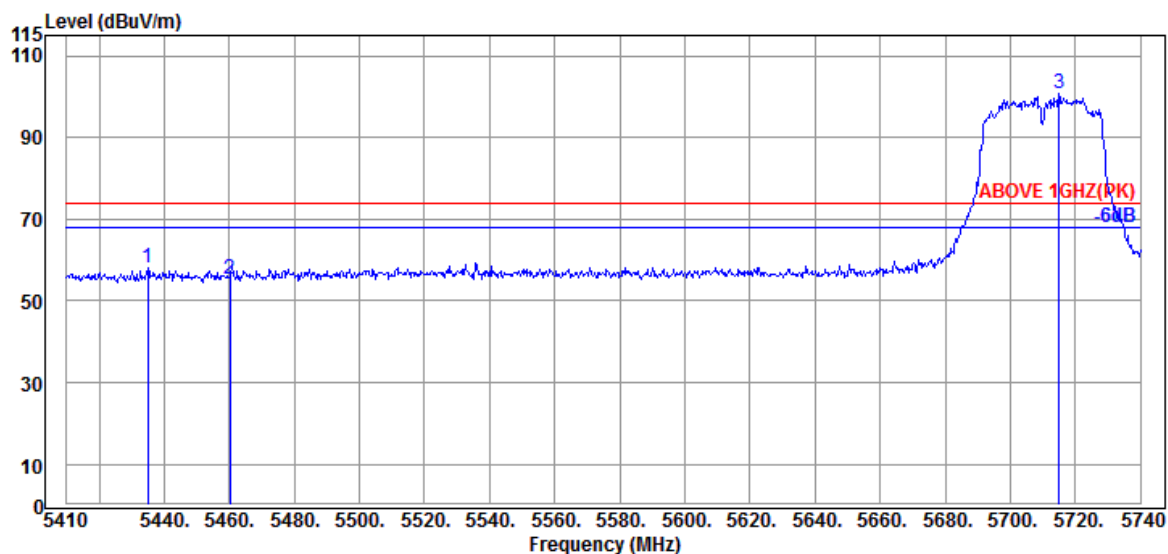

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.080	34.65	9.04	34.22	48.65	58.12	74.00	15.88	Peak
5460.160	34.60	9.05	34.21	45.74	55.18	74.00	18.82	Peak
@ 5714.920	34.80	9.19	34.30	91.04	100.73	---	---	Peak

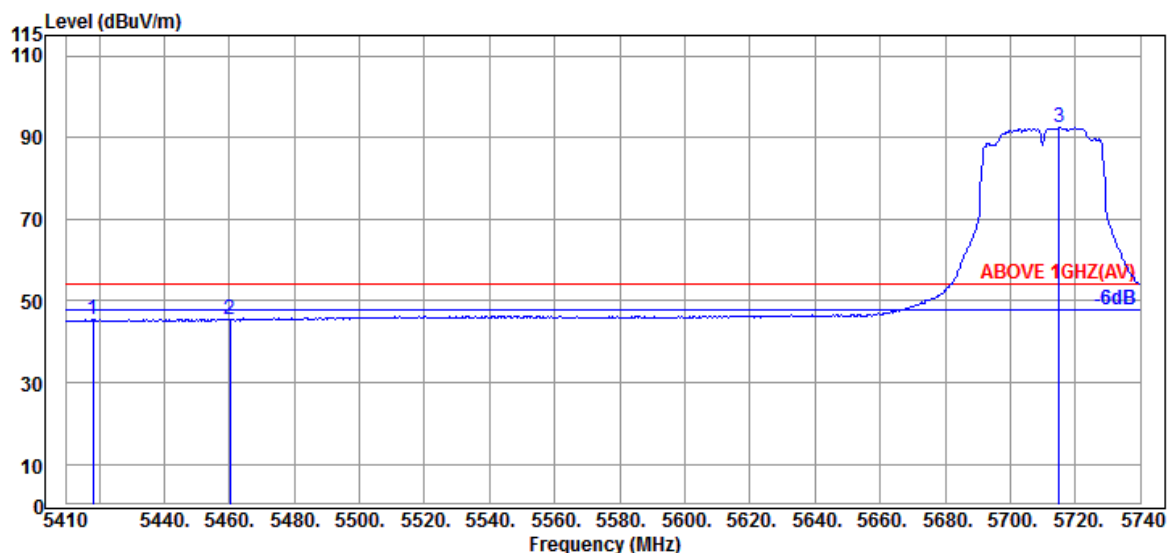

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.250	34.70	9.04	34.23	35.96	45.47	54.00	8.53	Average
5460.160	34.60	9.05	34.21	35.91	45.35	54.00	8.65	Average
@ 5714.920	34.80	9.19	34.30	82.92	92.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

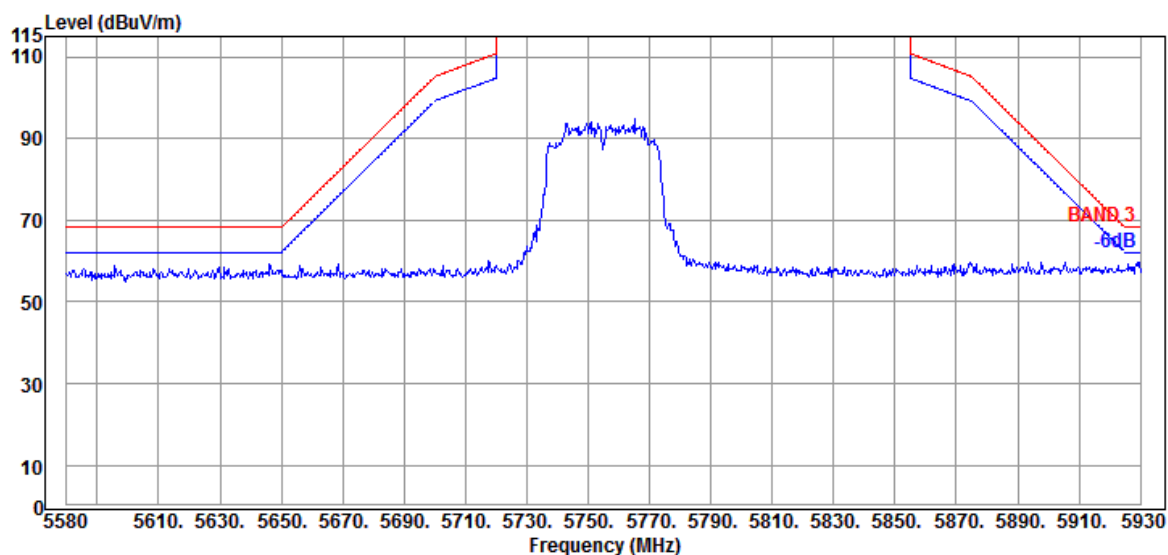


Antenna at Vertical Polarization

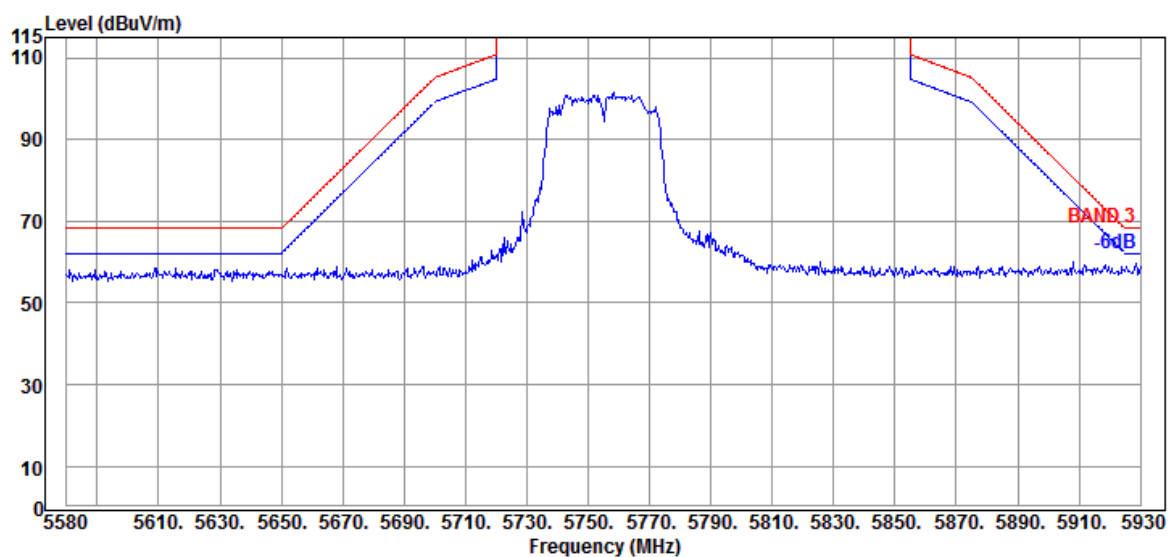


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

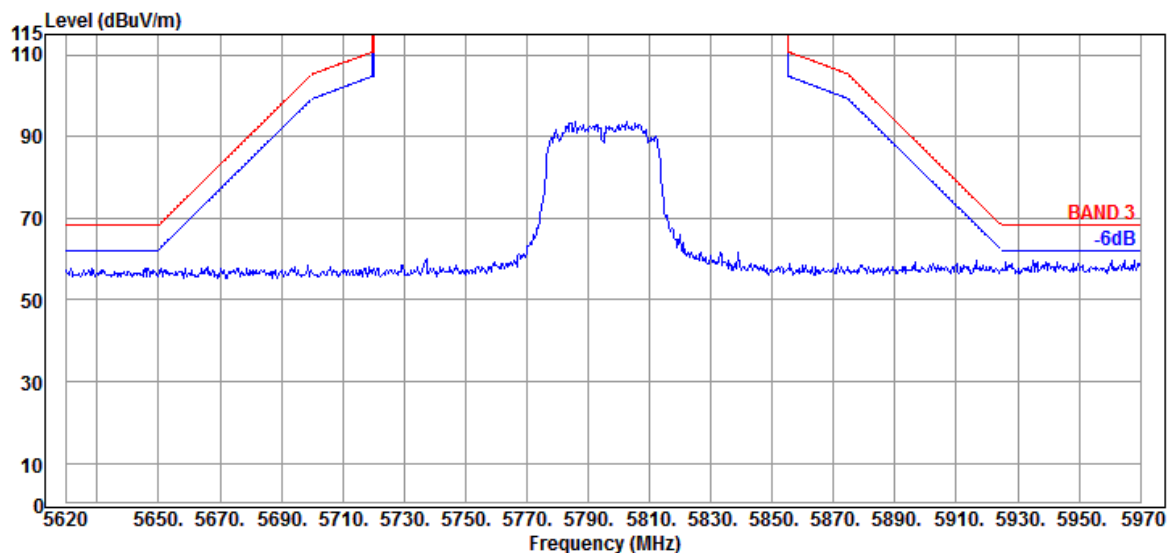

Antenna at Vertical Polarization

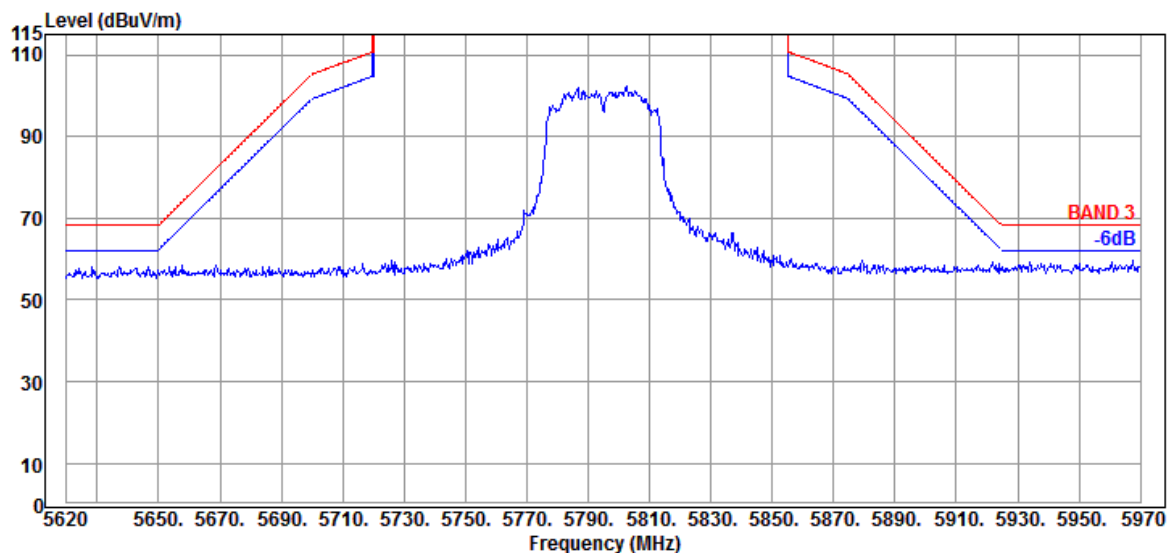

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

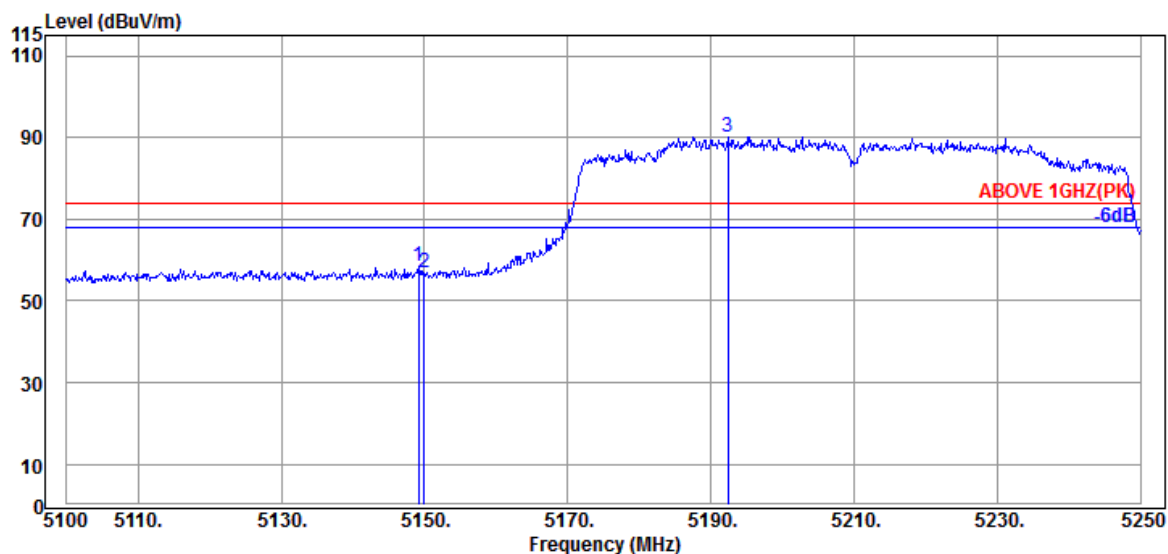

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.50	8.88	34.34	49.51	58.55	74.00	15.45	Peak
5149.950	34.50	8.88	34.34	47.81	56.85	74.00	17.15	Peak
@ 5192.400	34.70	8.91	34.32	80.92	90.21	---	---	Peak

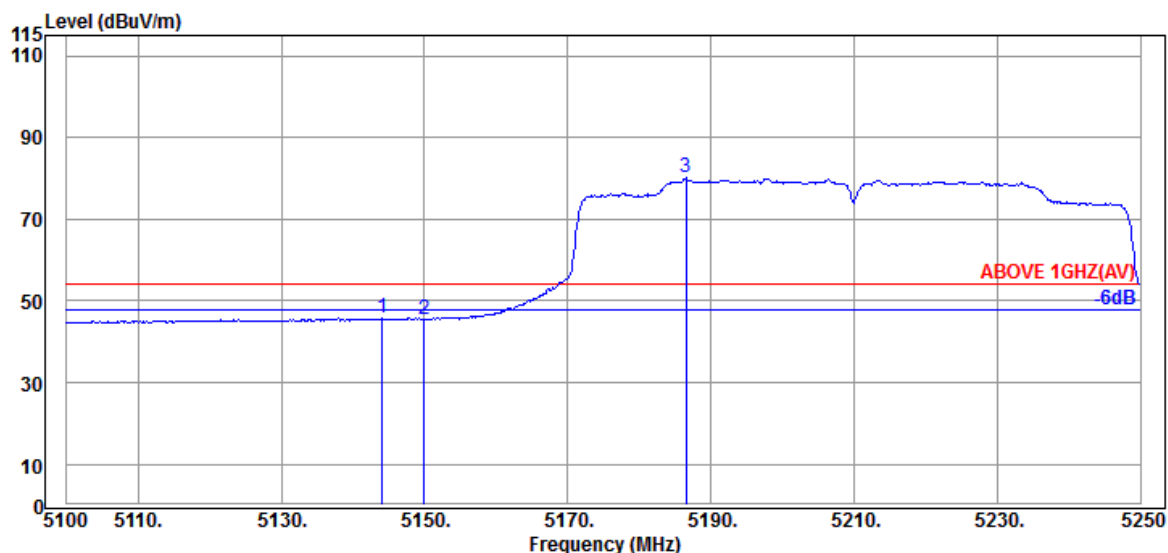

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	34.50	8.88	34.34	36.63	45.67	54.00	8.33	Average
5149.950	34.50	8.88	34.34	36.46	45.50	54.00	8.50	Average
@ 5186.550	34.70	8.91	34.32	70.75	80.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

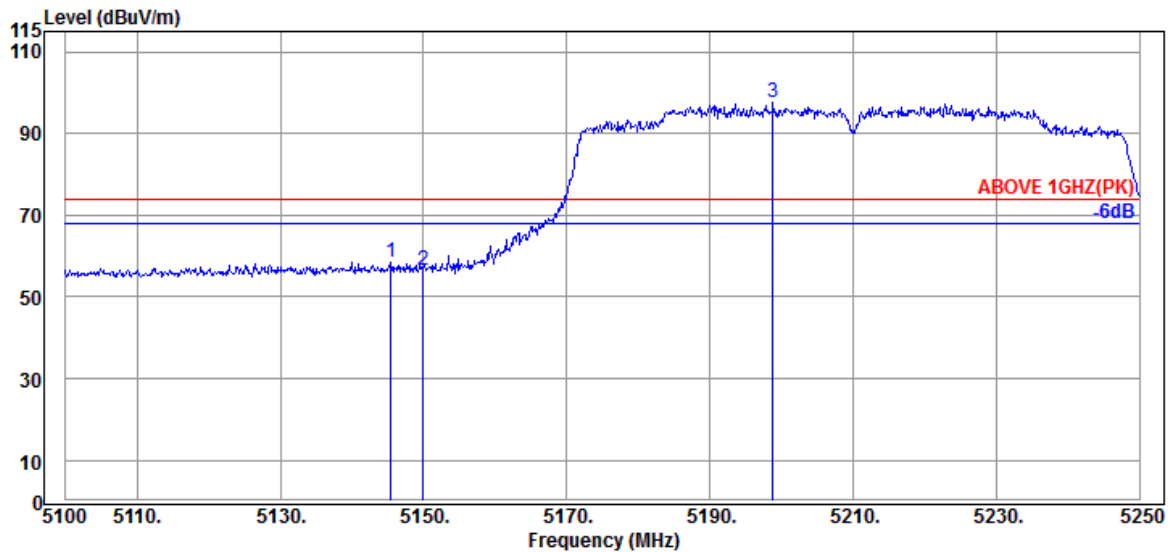

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.450	34.50	8.88	34.34	49.42	58.46	74.00	15.54	Peak
5149.950	34.50	8.88	34.34	47.41	56.45	74.00	17.55	Peak
@ 5198.850	34.70	8.91	34.32	88.15	97.44	---	---	Peak

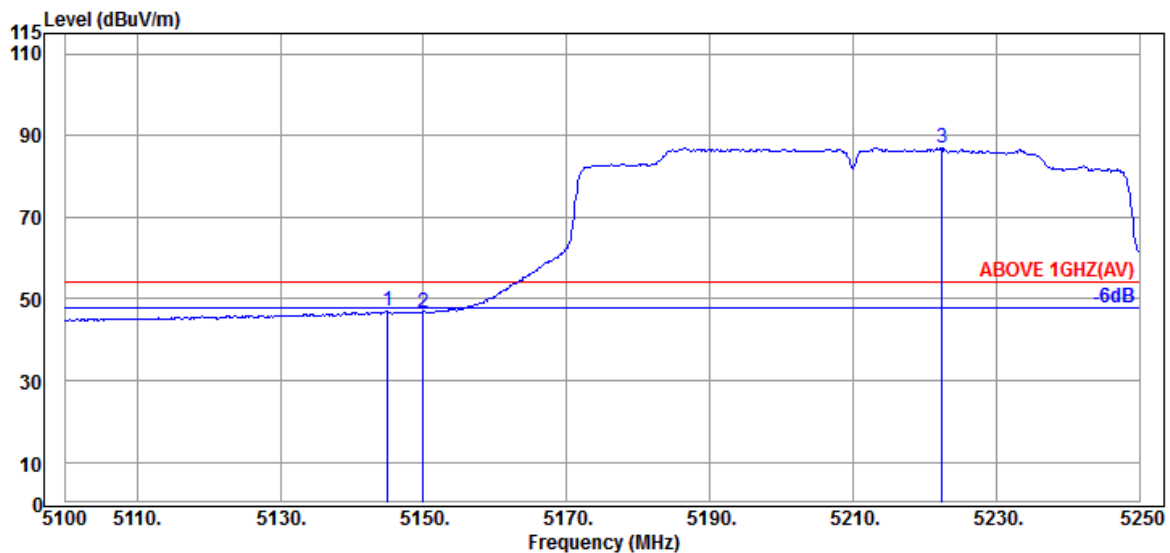

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	34.50	8.88	34.34	37.94	46.98	54.00	7.02	Average
5149.950	34.50	8.88	34.34	37.65	46.69	54.00	7.31	Average
@ 5222.400	34.60	8.93	34.31	77.88	87.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

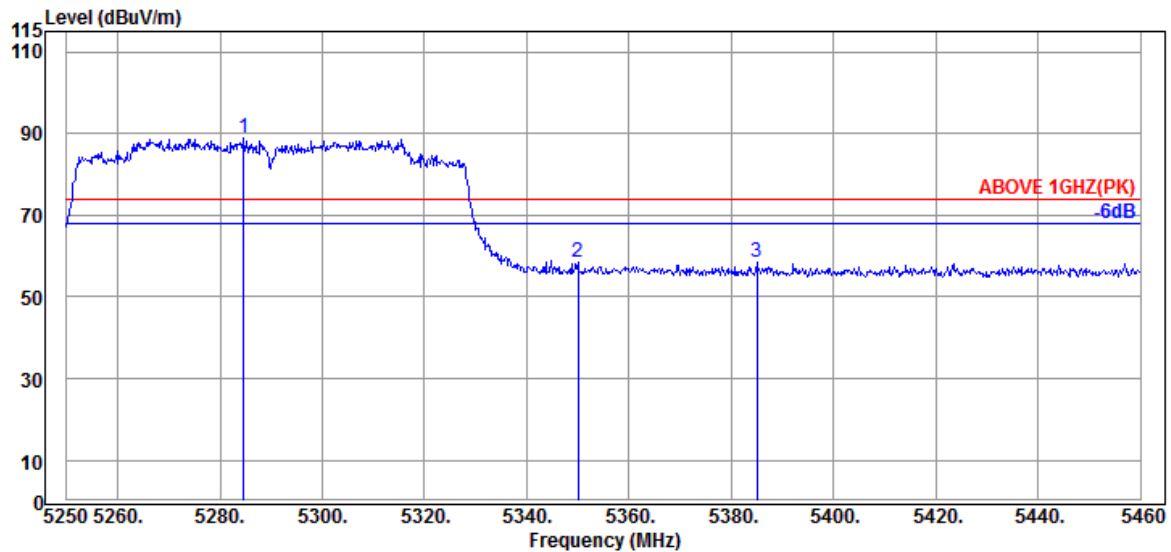

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.650	34.43	8.96	34.28	79.82	88.93	---	---	Peak
5349.960	34.90	8.99	34.26	48.67	58.30	74.00	15.70	Peak
5385.030	34.83	9.01	34.24	48.92	58.52	74.00	15.48	Peak

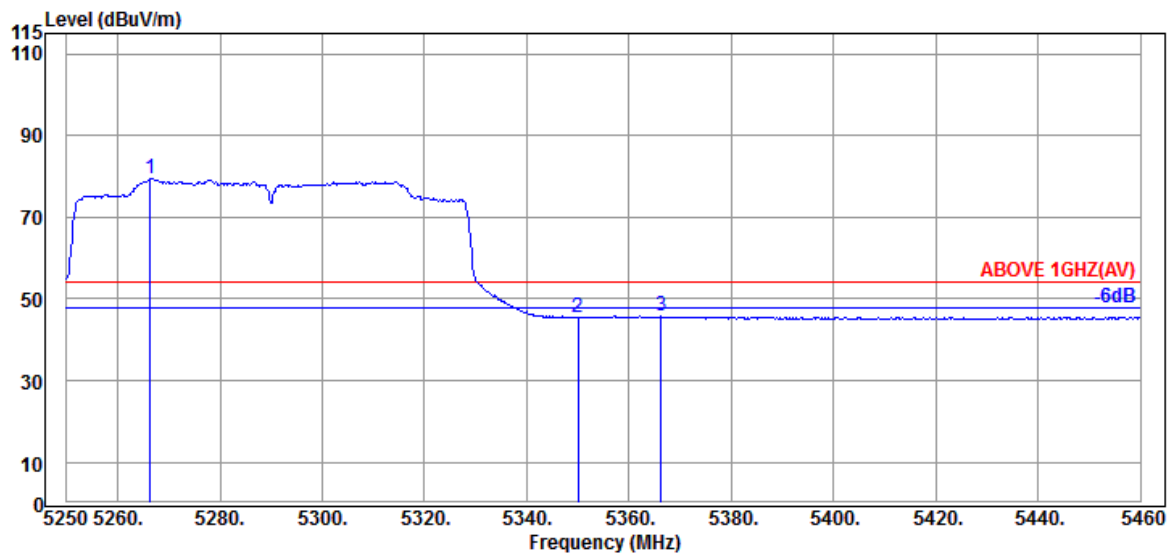

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.380	34.47	8.95	34.29	70.48	79.61	---	---	Average
5349.960	34.90	8.99	34.26	35.87	45.50	54.00	8.50	Average
5366.340	34.87	9.00	34.25	36.17	45.79	54.00	8.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

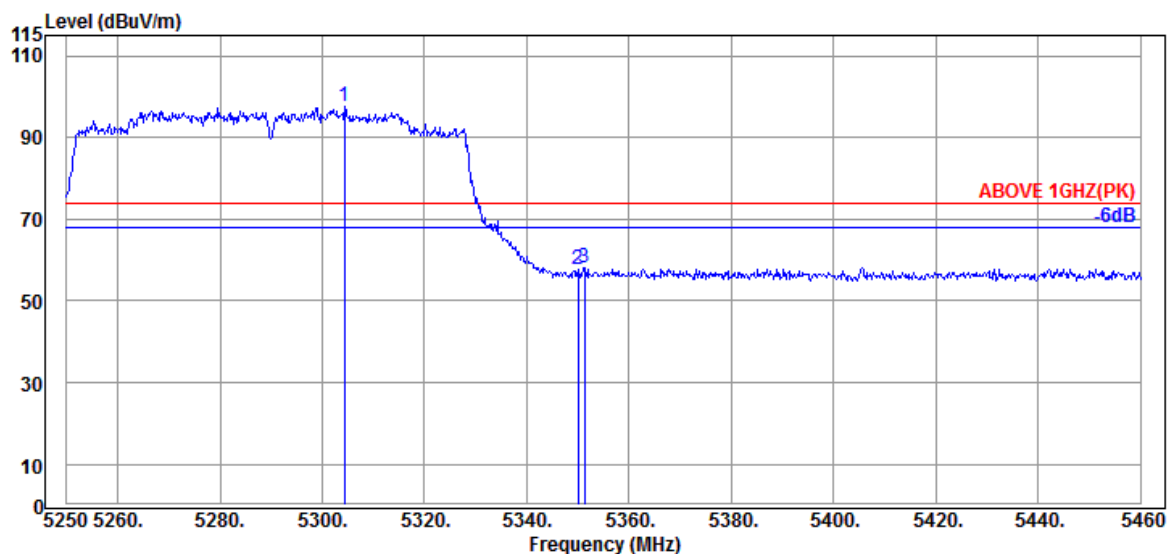

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.390	34.40	8.97	34.28	88.42	97.51	---	---	Peak
5349.960	34.90	8.99	34.26	47.93	57.56	74.00	16.44	Peak
5351.220	34.90	8.99	34.26	48.45	58.08	74.00	15.92	Peak

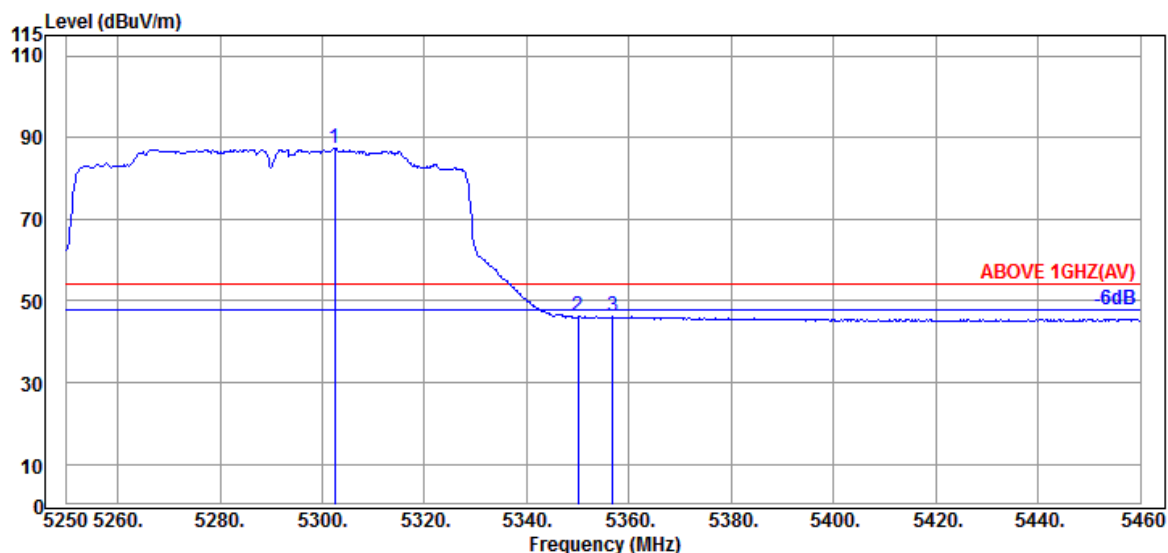

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.500	34.40	8.97	34.28	78.31	87.40	---	---	Average
5349.960	34.90	8.99	34.26	36.47	46.10	54.00	7.90	Average
5356.890	34.87	9.00	34.26	36.49	46.10	54.00	7.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

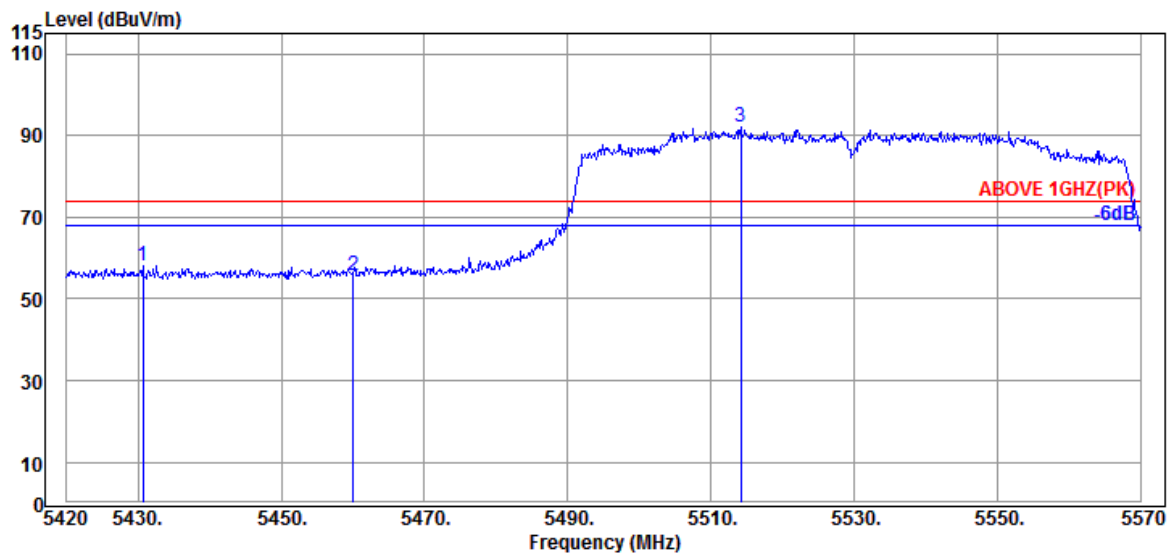

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.650	34.70	9.04	34.23	48.66	58.17	74.00	15.83	Peak
5460.050	34.60	9.05	34.21	46.16	55.60	74.00	18.40	Peak
@ 5514.200	34.70	9.09	34.21	82.59	92.17	---	---	Peak

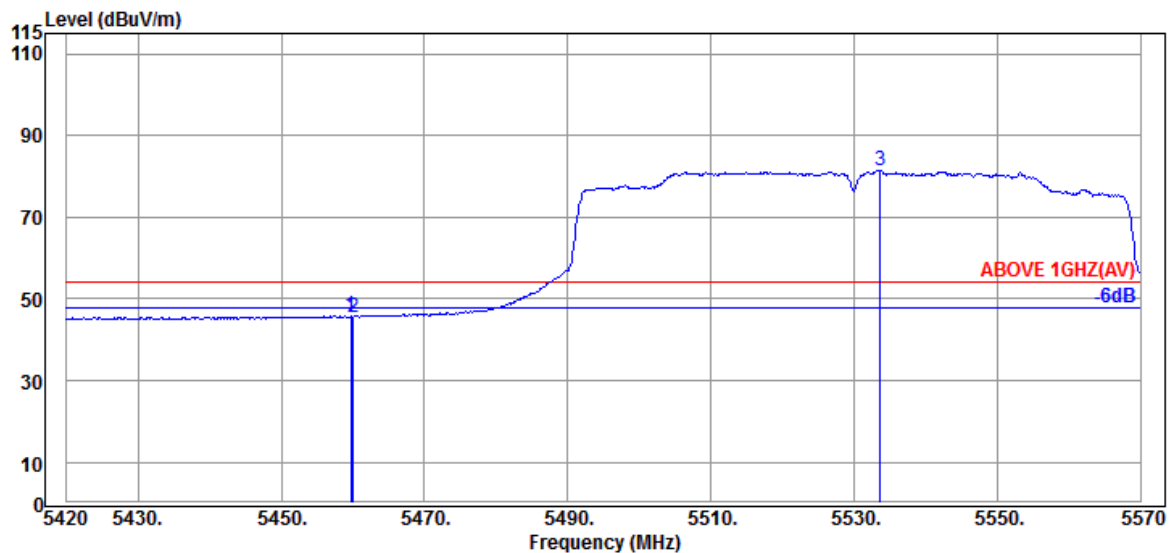

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.750	34.60	9.05	34.21	36.39	45.83	54.00	8.17	Average
5460.050	34.60	9.05	34.21	36.15	45.59	54.00	8.41	Average
@ 5533.700	34.70	9.09	34.22	71.87	81.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

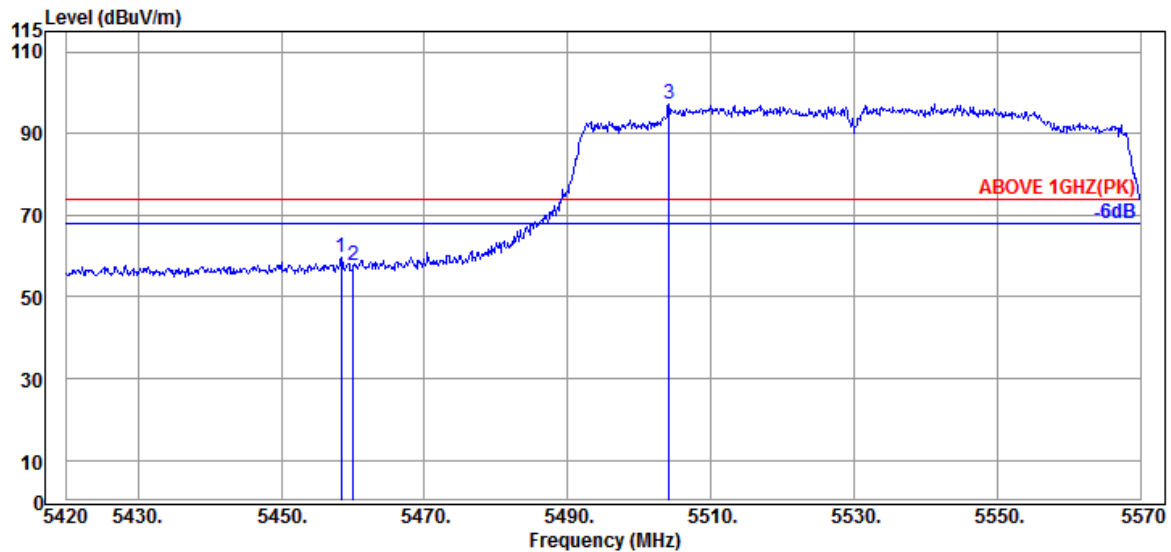

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.60	9.05	34.21	50.07	59.51	74.00	14.49	Peak
5460.050	34.60	9.05	34.21	48.28	57.72	74.00	16.28	Peak
@ 5504.150	34.70	9.08	34.20	87.65	97.23	---	---	Peak

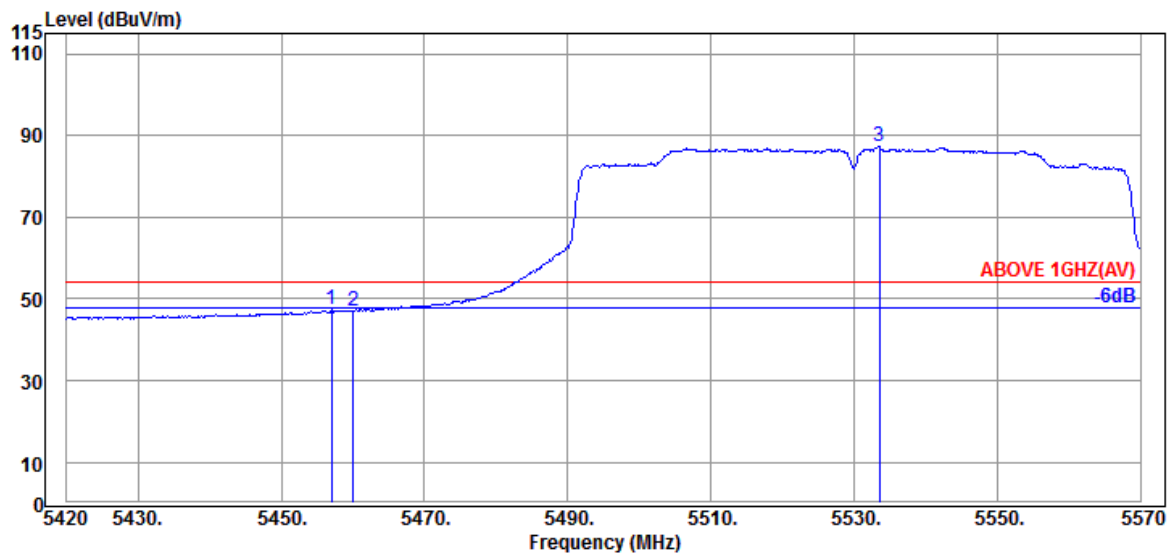

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.050	34.60	9.05	34.21	37.82	47.26	54.00	6.74	Average
5460.050	34.60	9.05	34.21	37.65	47.09	54.00	6.91	Average
@ 5533.550	34.70	9.09	34.22	77.73	87.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

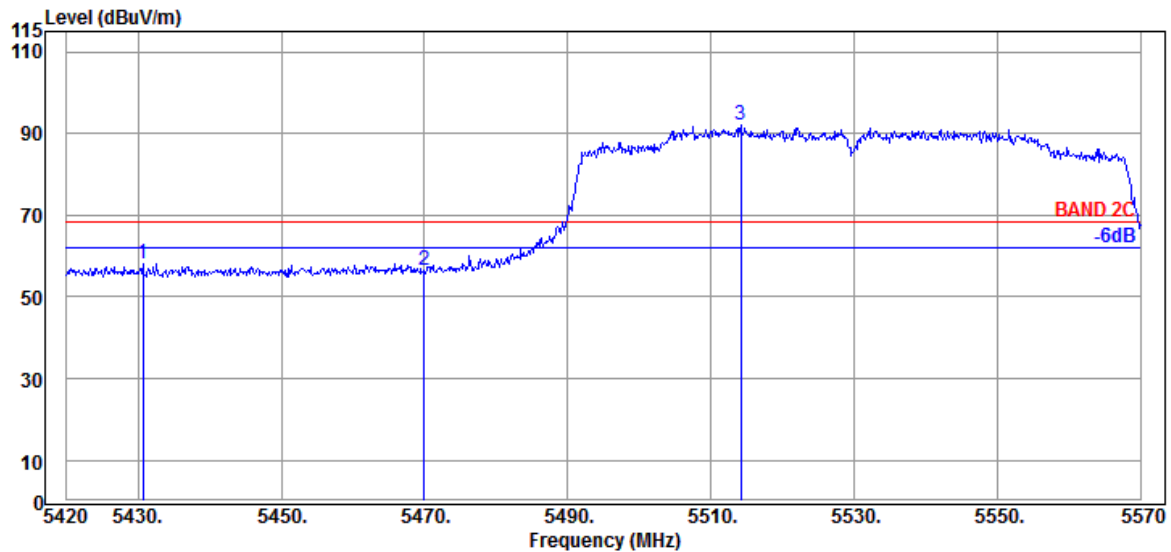

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.650	34.70	9.04	34.23	48.66	58.17	68.20	10.03	Peak
5469.950	34.63	9.06	34.21	47.15	56.63	68.20	11.57	Peak
@ 5514.200	34.70	9.09	34.21	82.59	92.17	---	---	Peak

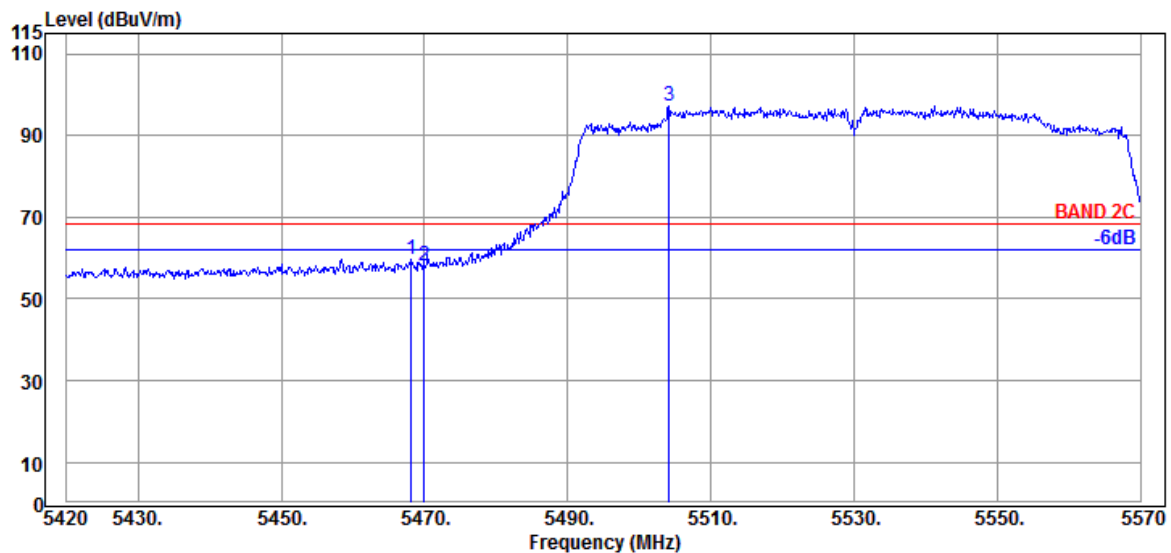

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	34.63	9.06	34.21	50.34	59.82	68.20	8.38	Peak
5469.950	34.63	9.06	34.21	48.45	57.93	68.20	10.27	Peak
@ 5504.150	34.70	9.08	34.20	87.65	97.23	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

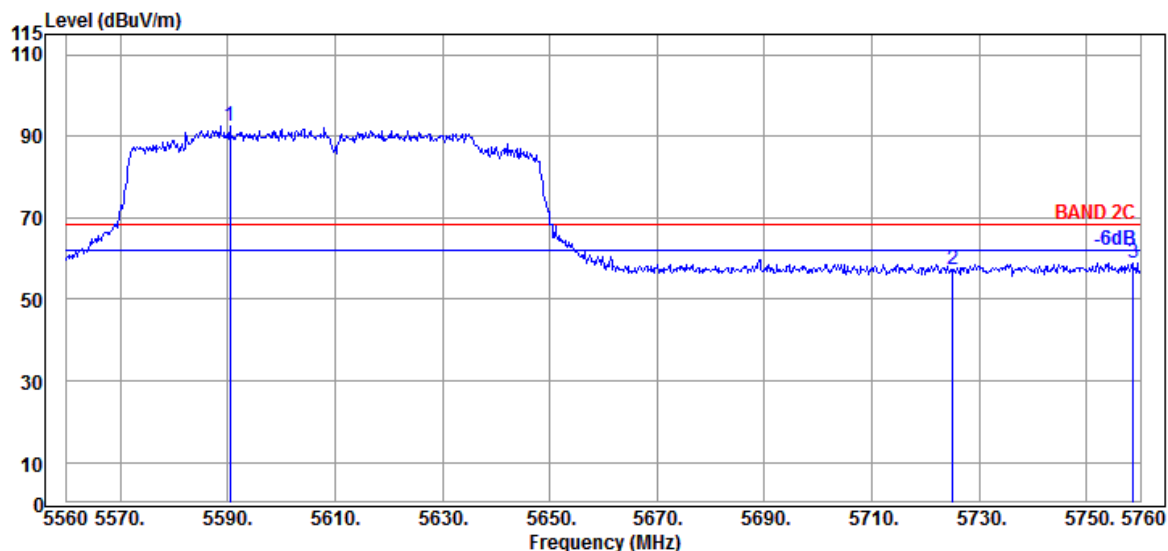

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5590.400	34.50	9.12	34.24	83.17	92.55	---	---	Peak
	5725.000	34.90	9.20	34.30	47.56	57.36	68.20	10.84	Peak
	5758.600	35.03	9.21	34.32	49.10	59.02	68.20	9.18	Peak

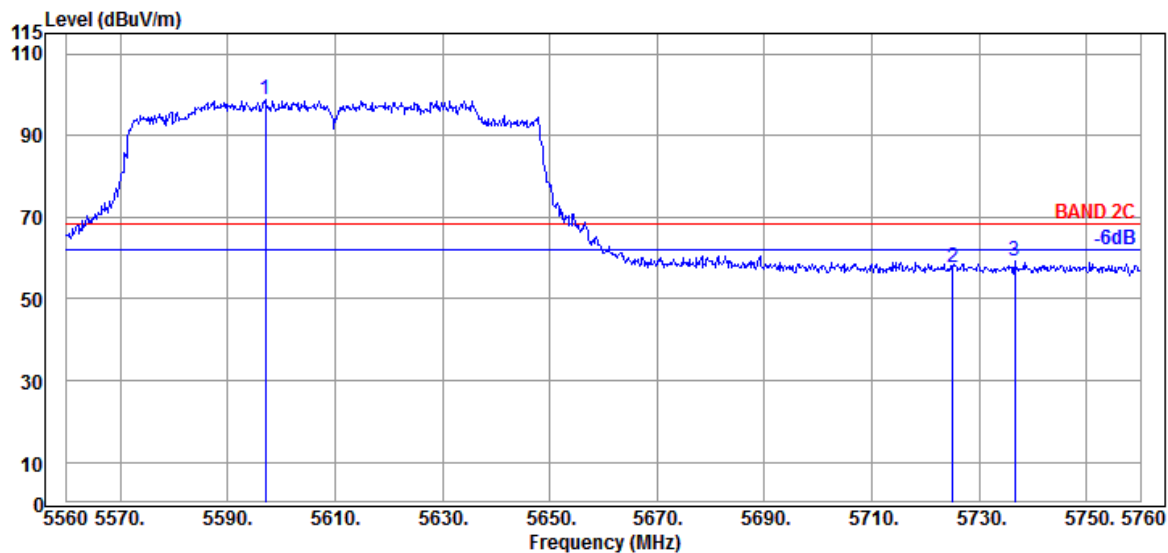

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5597.000	34.40	9.13	34.25	89.55	98.83	---	---	Peak
	5725.000	34.90	9.20	34.30	47.85	57.65	68.20	10.55	Peak
	5736.600	34.90	9.20	34.31	49.50	59.29	68.20	8.91	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

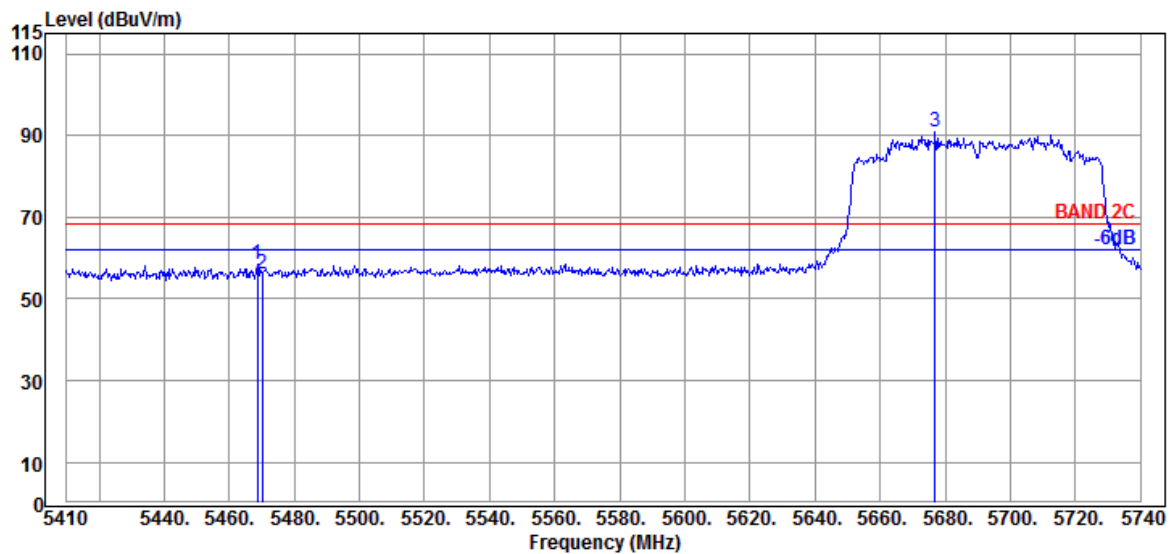

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5468.740	34.63	9.06	34.21	48.98	58.46	68.20	9.74	Peak
	5470.060	34.63	9.06	34.21	46.76	56.24	68.20	11.96	Peak
	5676.970	34.63	9.17	34.29	81.38	90.89	---	---	Peak

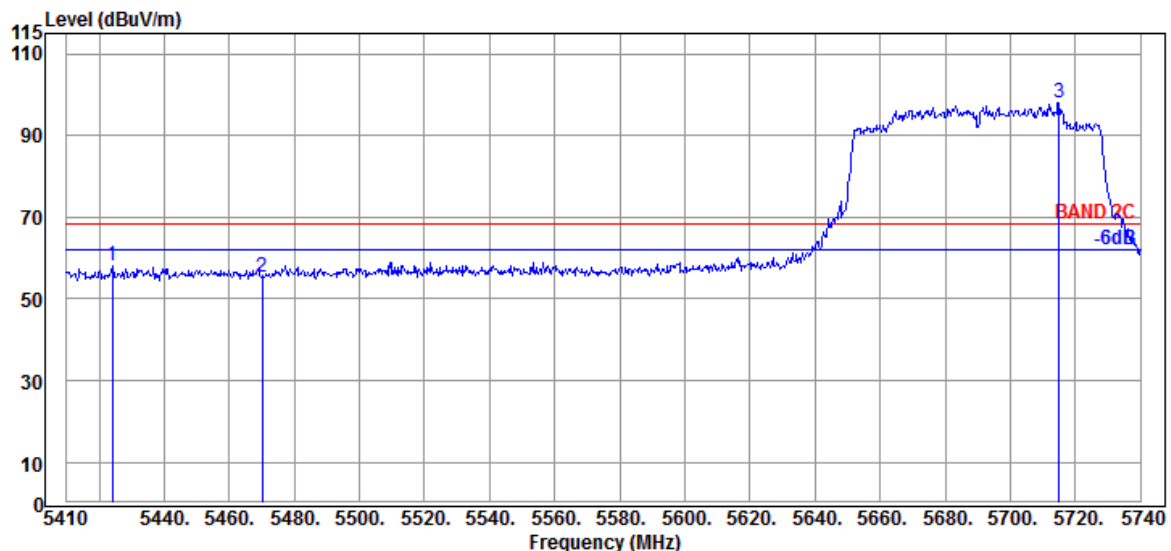

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5424.190	34.70	9.04	34.23	48.43	57.94	68.20	10.26	Peak
	5470.060	34.63	9.06	34.21	45.66	55.14	68.20	13.06	Peak
	5714.920	34.80	9.19	34.30	88.39	98.08	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

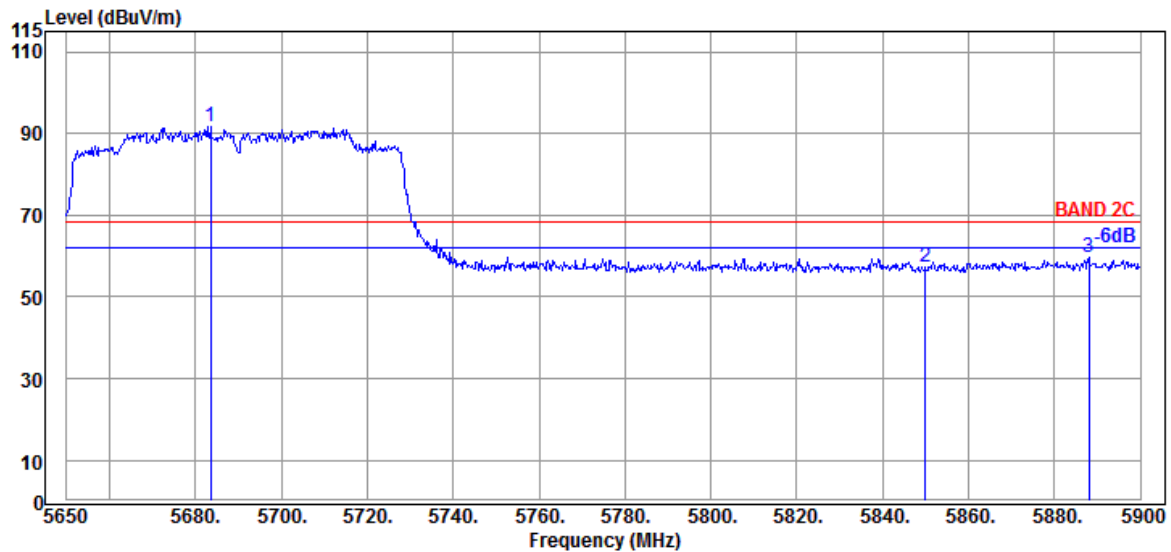

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5683.500	34.63	9.17	34.29	82.08	91.59	---	---	Peak
	5850.000	35.40	9.25	34.36	46.83	57.12	68.20	11.08	Peak
	5888.000	35.67	9.27	34.38	49.05	59.61	68.20	8.59	Peak

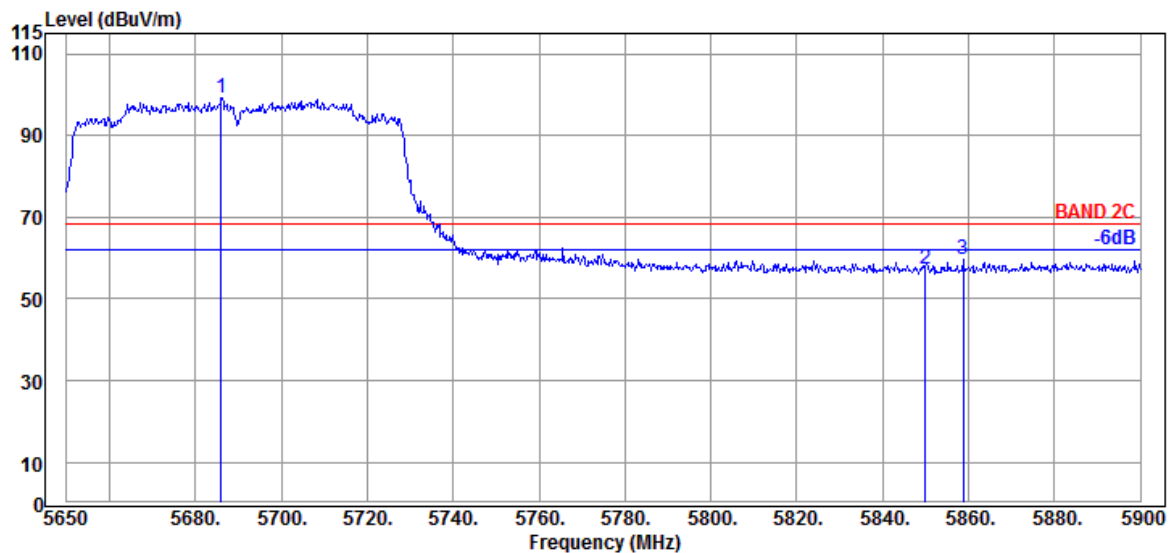

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5686.000	34.63	9.17	34.29	89.77	99.28	---	---	Peak
	5850.000	35.40	9.25	34.36	47.16	57.45	68.20	10.75	Peak
	5858.750	35.53	9.26	34.36	49.30	59.73	68.20	8.47	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

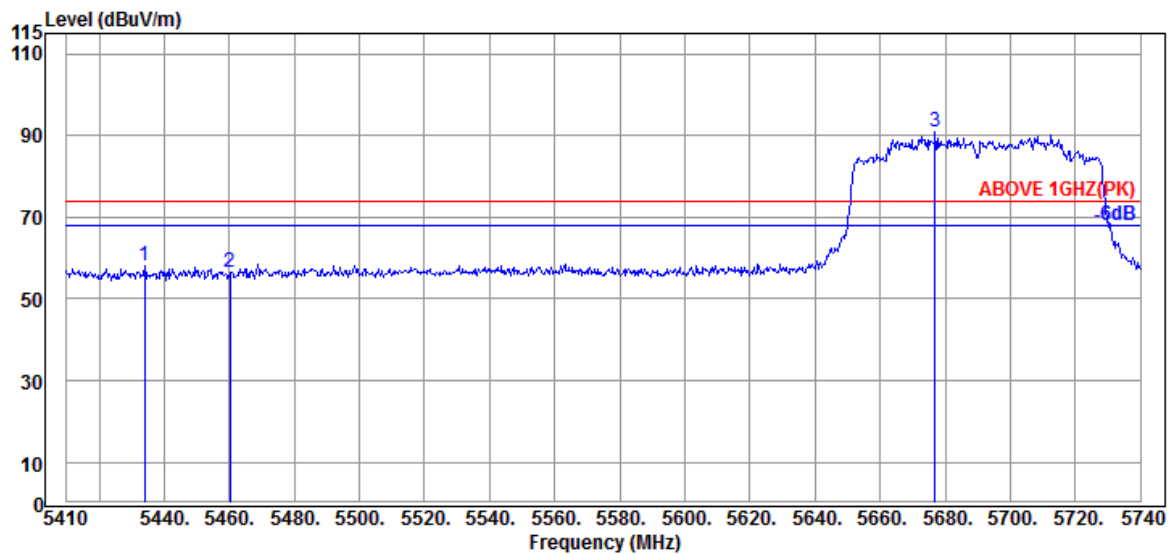

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.090	34.65	9.04	34.22	48.44	57.91	74.00	16.09	Peak
5460.160	34.60	9.05	34.21	47.00	56.44	74.00	17.56	Peak
@ 5676.970	34.63	9.17	34.29	81.38	90.89	---	---	Peak

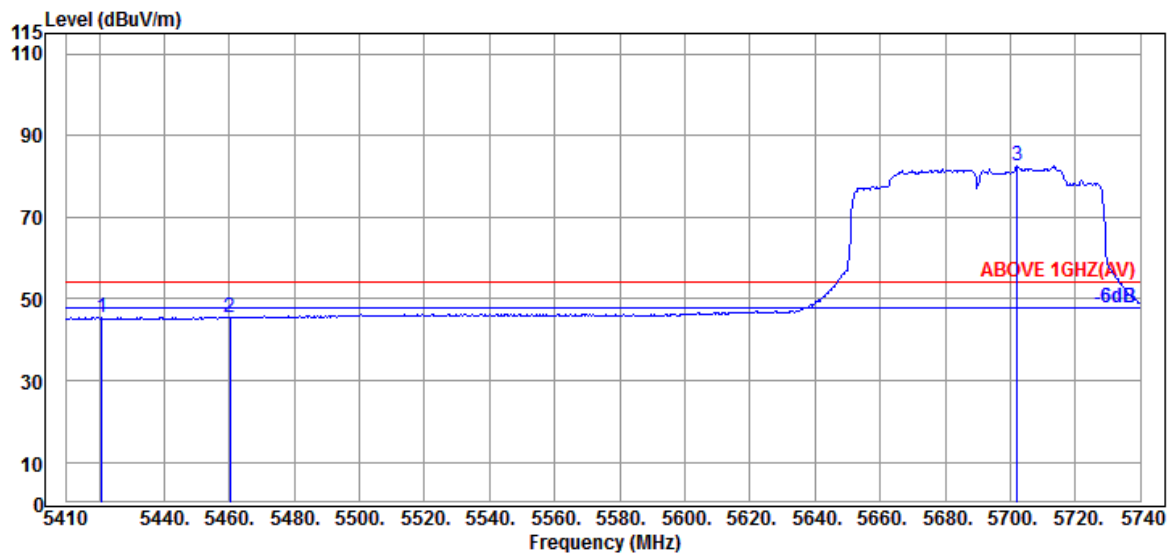

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.890	34.70	9.04	34.23	35.98	45.49	54.00	8.51	Average
5460.160	34.60	9.05	34.21	35.88	45.32	54.00	8.68	Average
@ 5702.050	34.70	9.18	34.29	72.84	82.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

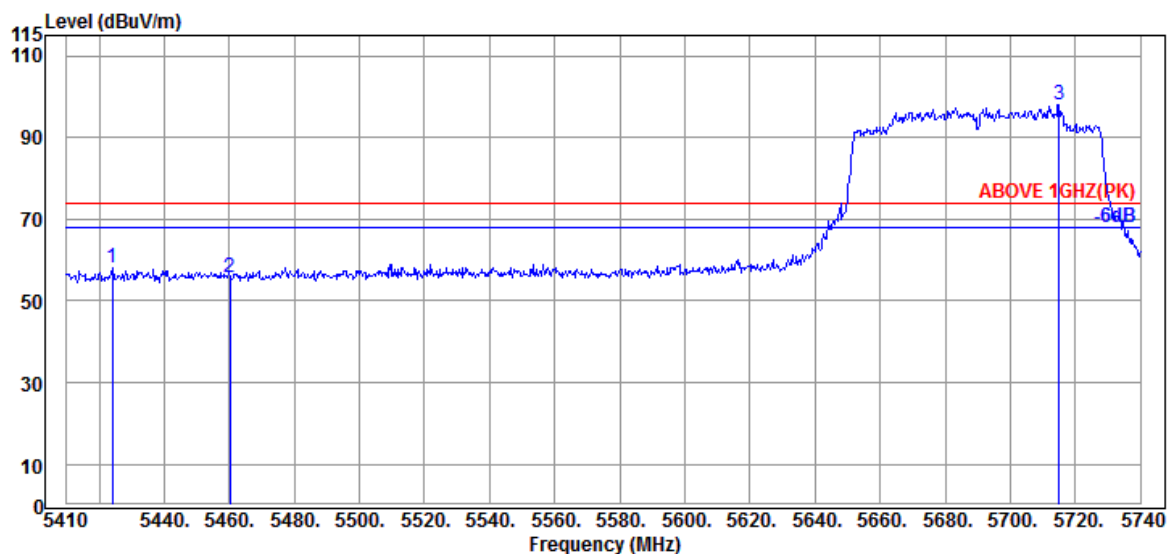

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.190	34.70	9.04	34.23	48.43	57.94	74.00	16.06	Peak
5460.160	34.60	9.05	34.21	46.23	55.67	74.00	18.33	Peak
@ 5714.920	34.80	9.19	34.30	88.39	98.08	---	---	Peak

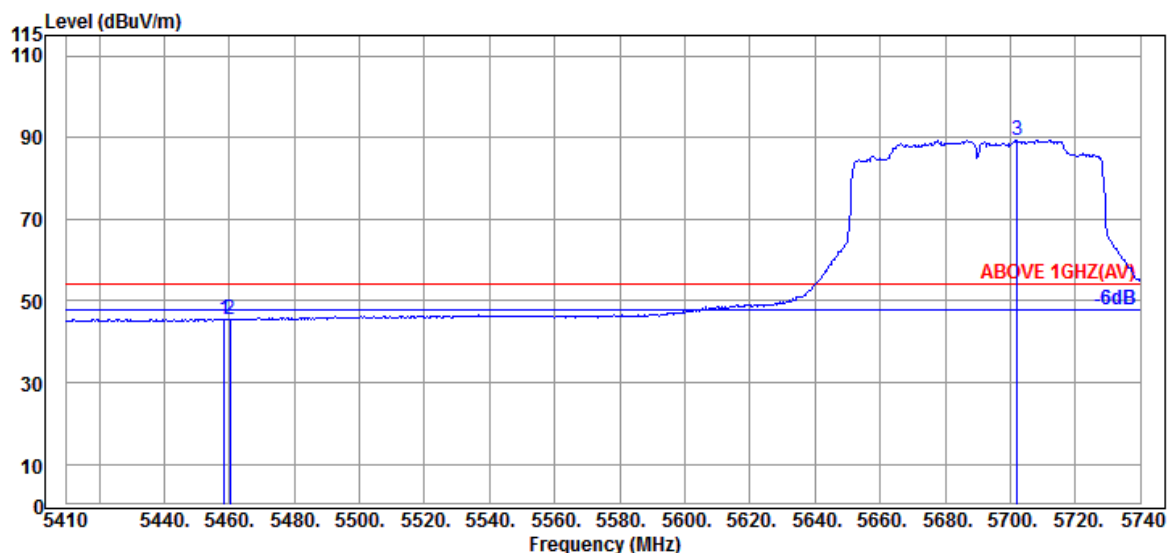

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	34.60	9.05	34.21	36.14	45.58	54.00	8.42	Average
5460.160	34.60	9.05	34.21	36.20	45.64	54.00	8.36	Average
@ 5702.050	34.70	9.18	34.29	79.83	89.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

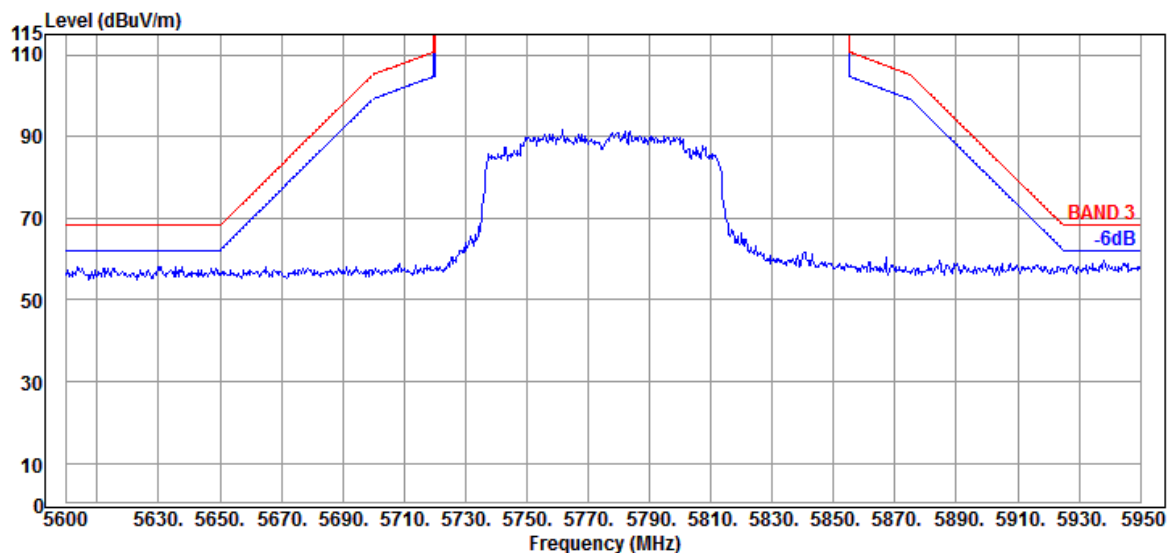

Antenna at Vertical Polarization

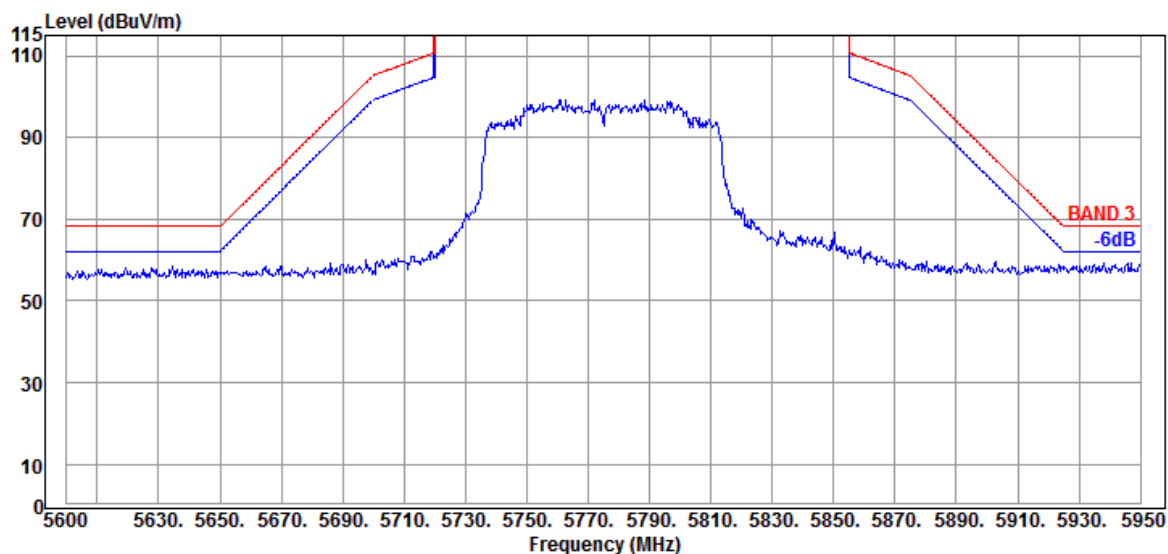

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

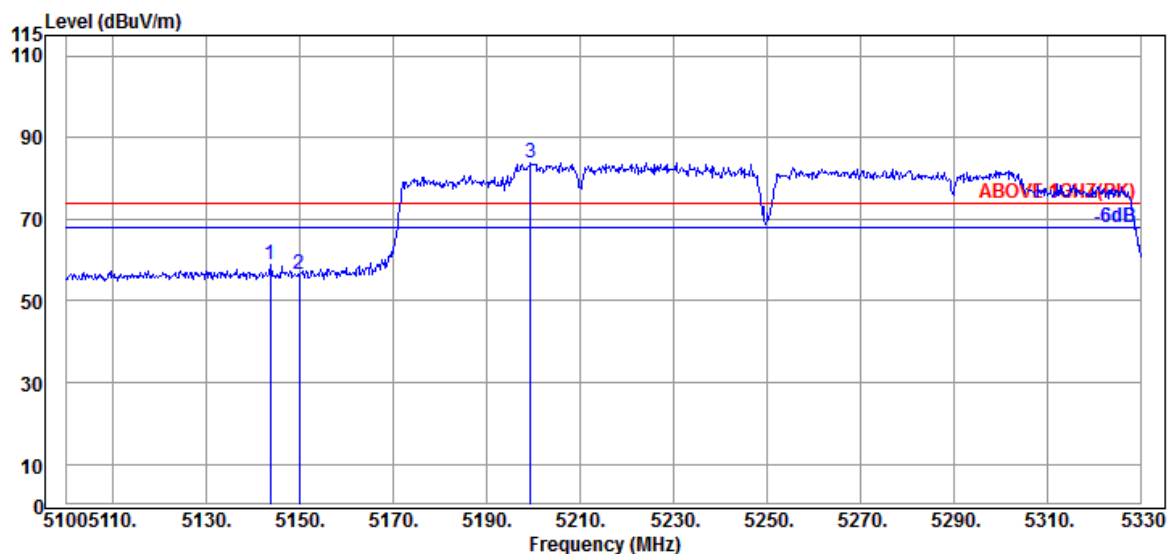

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.700	34.50	8.88	34.34	49.72	58.76	74.00	15.24	Peak
5149.910	34.50	8.88	34.34	47.30	56.34	74.00	17.66	Peak
@ 5199.360	34.70	8.91	34.32	74.48	83.77	---	---	Peak

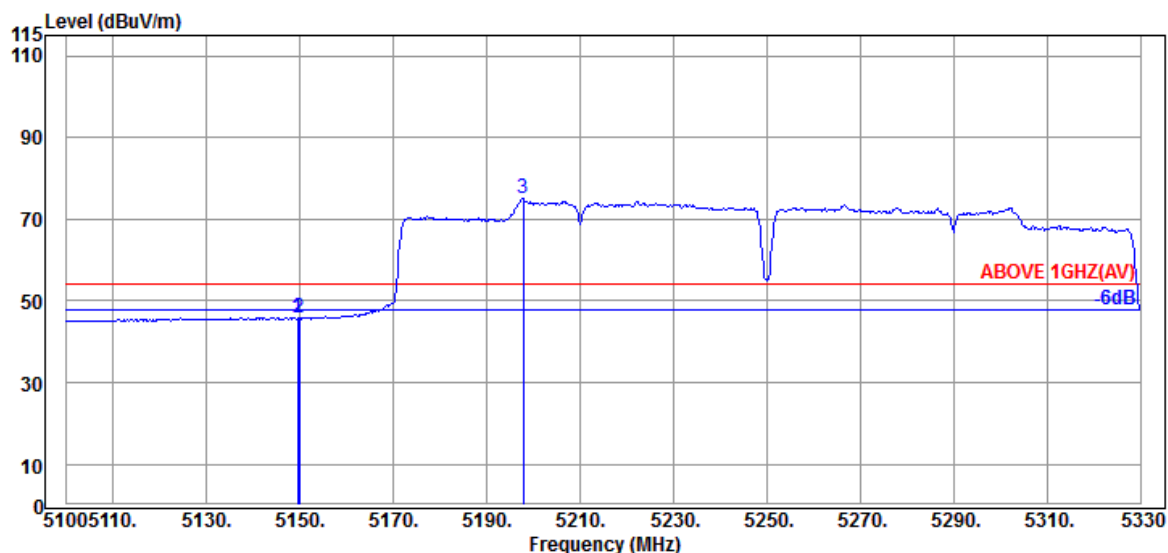

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.50	8.88	34.34	36.80	45.84	54.00	8.16	Average
5149.910	34.50	8.88	34.34	36.64	45.68	54.00	8.32	Average
@ 5197.750	34.70	8.91	34.32	65.78	75.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

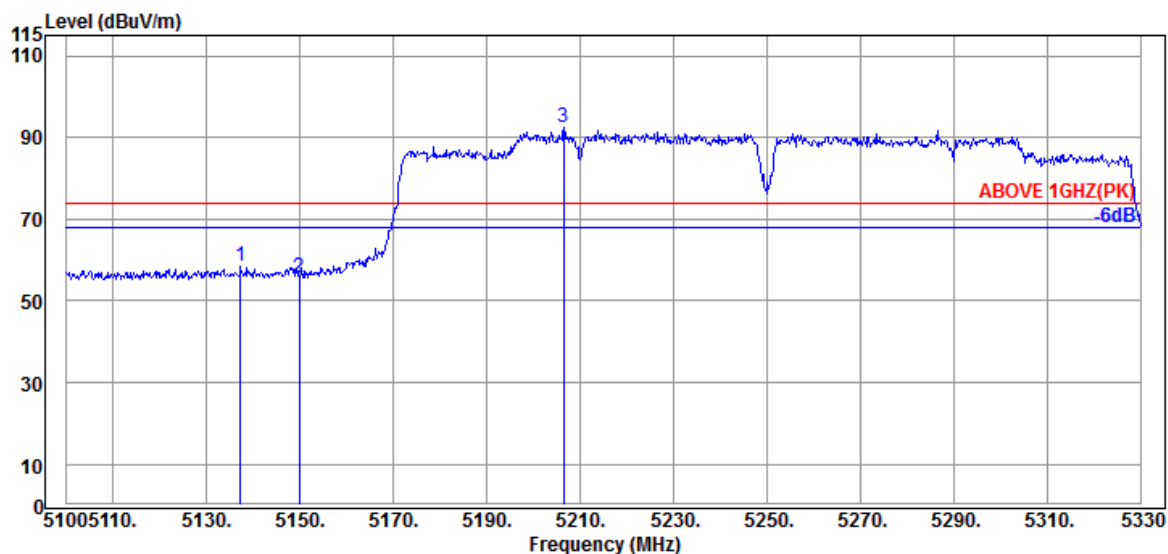

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.260	34.40	8.88	34.34	49.69	58.63	74.00	15.37	Peak
5149.910	34.50	8.88	34.34	46.79	55.83	74.00	18.17	Peak
@ 5206.490	34.65	8.92	34.32	83.03	92.28	---	---	Peak

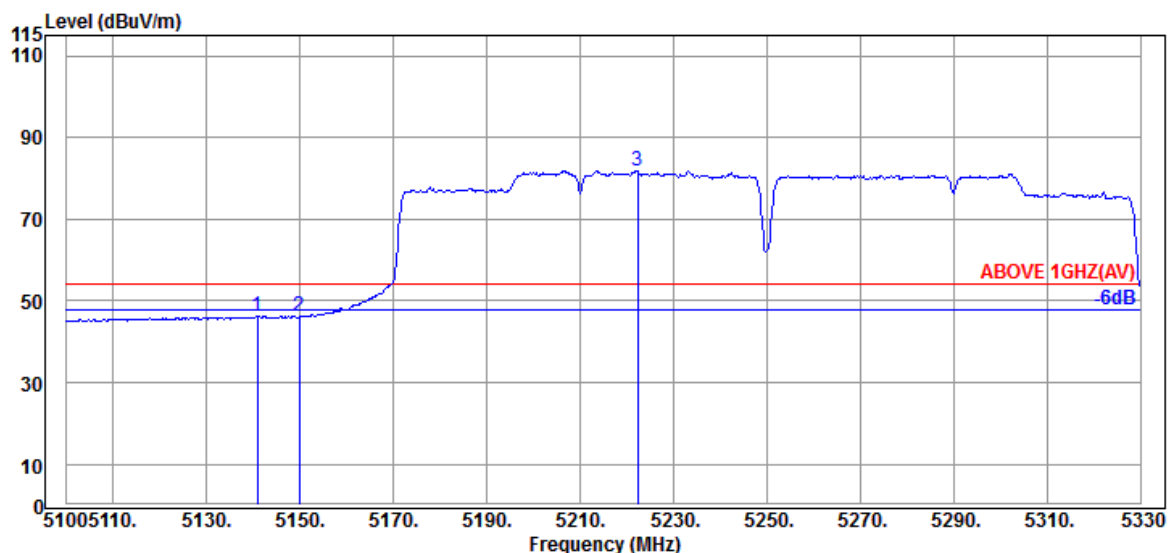

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.940	34.40	8.88	34.34	37.32	46.26	54.00	7.74	Average
5149.910	34.50	8.88	34.34	37.04	46.08	54.00	7.92	Average
@ 5222.360	34.60	8.93	34.31	72.58	81.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

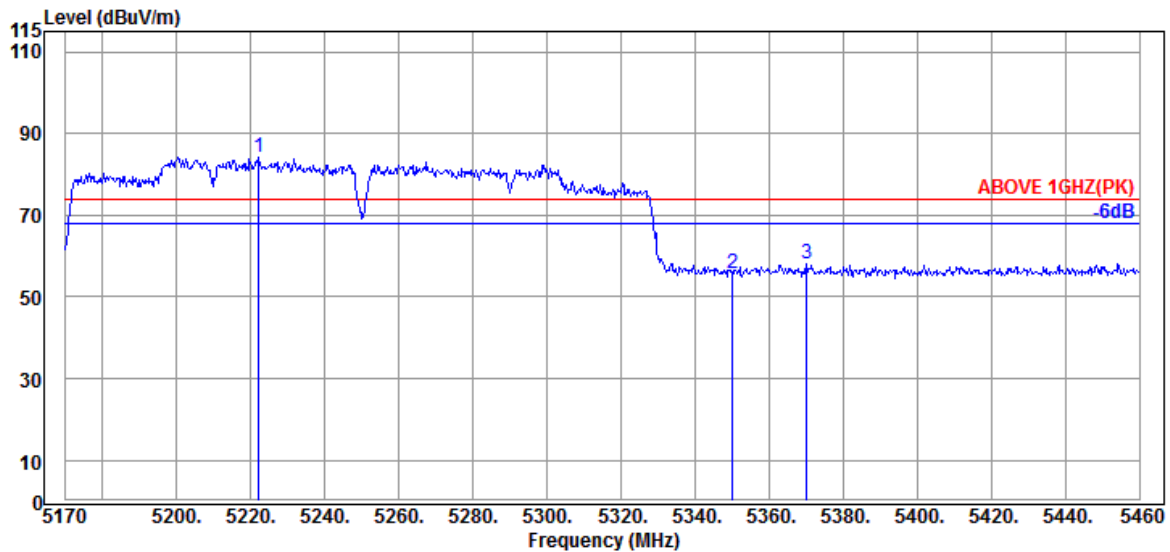

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.200	34.60	8.93	34.31	74.76	83.98	---	---	Peak
5350.090	34.90	8.99	34.26	46.28	55.91	74.00	18.09	Peak
5370.100	34.83	9.01	34.25	48.36	57.95	74.00	16.05	Peak

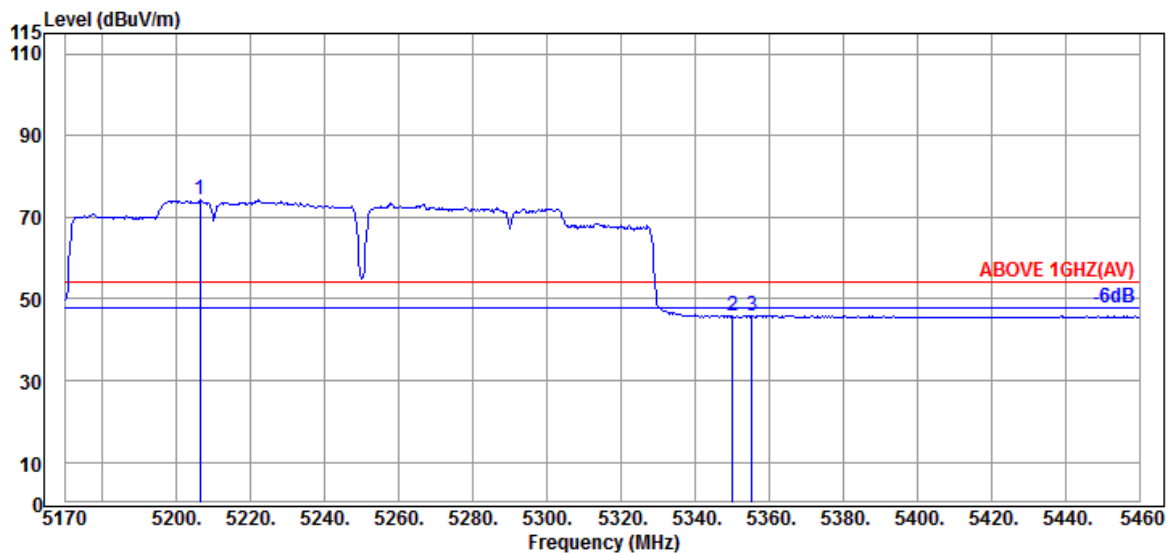

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.250	34.65	8.92	34.32	65.12	74.37	---	---	Average
5350.090	34.90	8.99	34.26	36.09	45.72	54.00	8.28	Average
5355.310	34.87	9.00	34.26	36.31	45.92	54.00	8.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

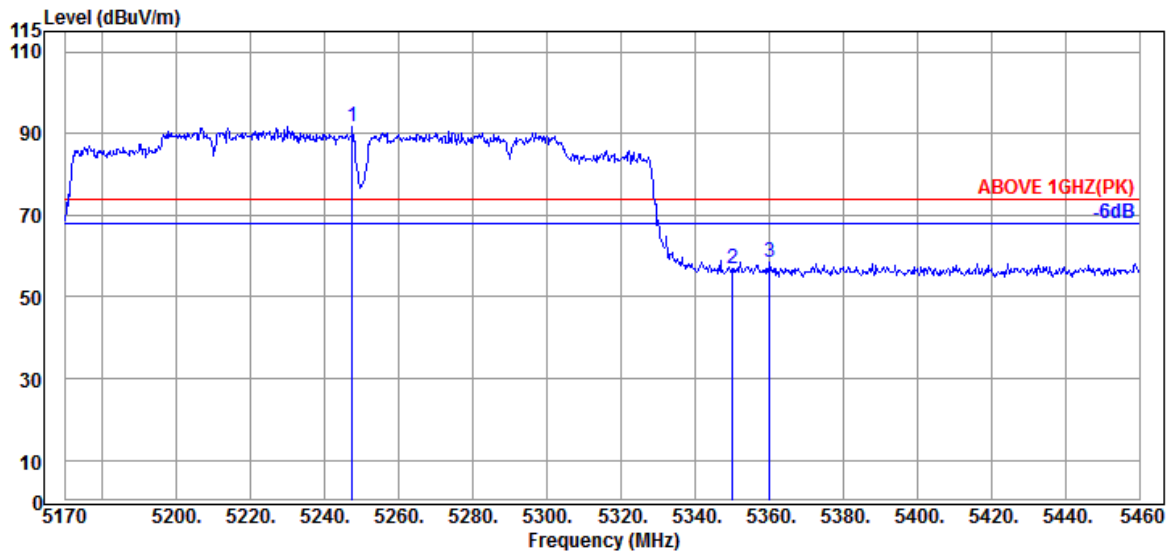

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5247.430	34.50	8.94	34.30	82.59	91.73	---	---	Peak
5350.090	34.90	8.99	34.26	47.17	56.80	74.00	17.20	Peak
5360.240	34.87	9.00	34.26	48.98	58.59	74.00	15.41	Peak

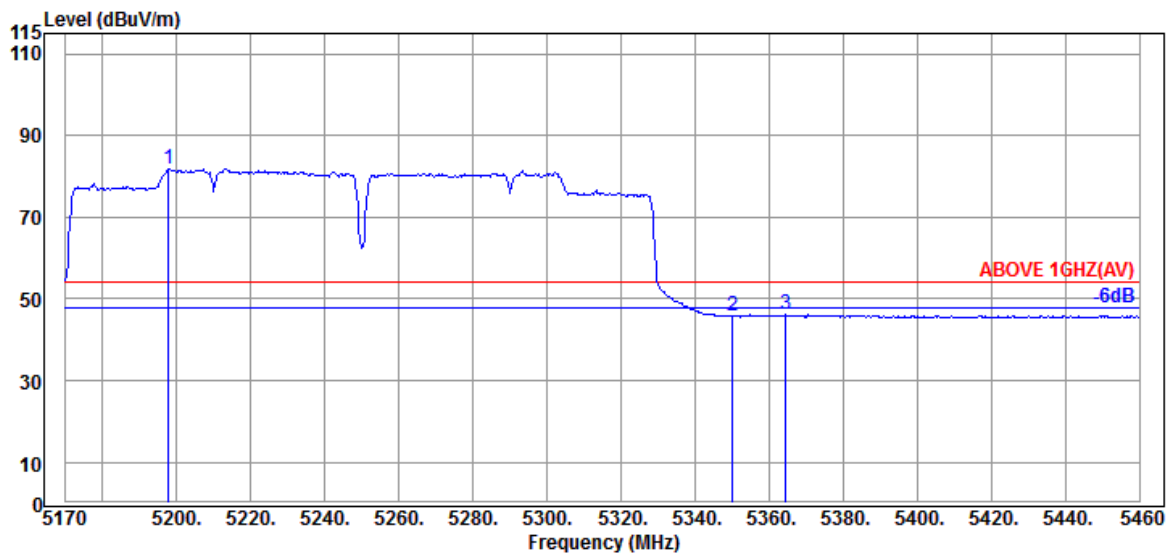

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	34.70	8.91	34.32	72.65	81.94	---	---	Average
5350.090	34.90	8.99	34.26	36.12	45.75	54.00	8.25	Average
5364.590	34.87	9.00	34.25	36.46	46.08	54.00	7.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

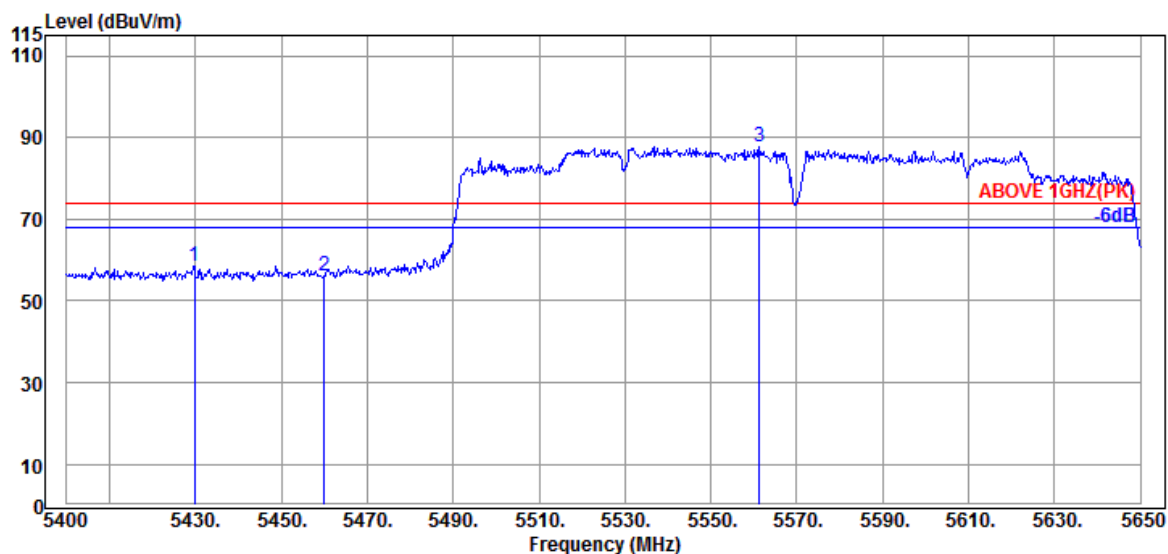

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.750	34.70	9.04	34.23	49.15	58.66	74.00	15.34	Peak
5460.000	34.60	9.05	34.21	46.87	56.31	74.00	17.69	Peak
@ 5561.250	34.60	9.11	34.23	78.45	87.93	---	---	Peak

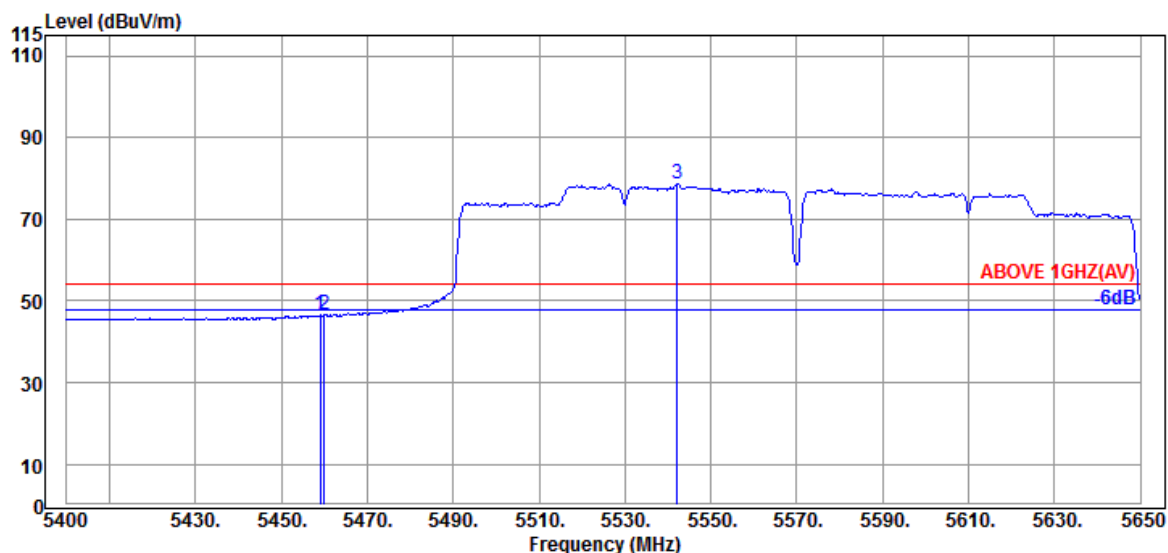

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.60	9.05	34.21	37.05	46.49	54.00	7.51	Average
5460.000	34.60	9.05	34.21	37.23	46.67	54.00	7.33	Average
@ 5542.250	34.70	9.09	34.23	69.09	78.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

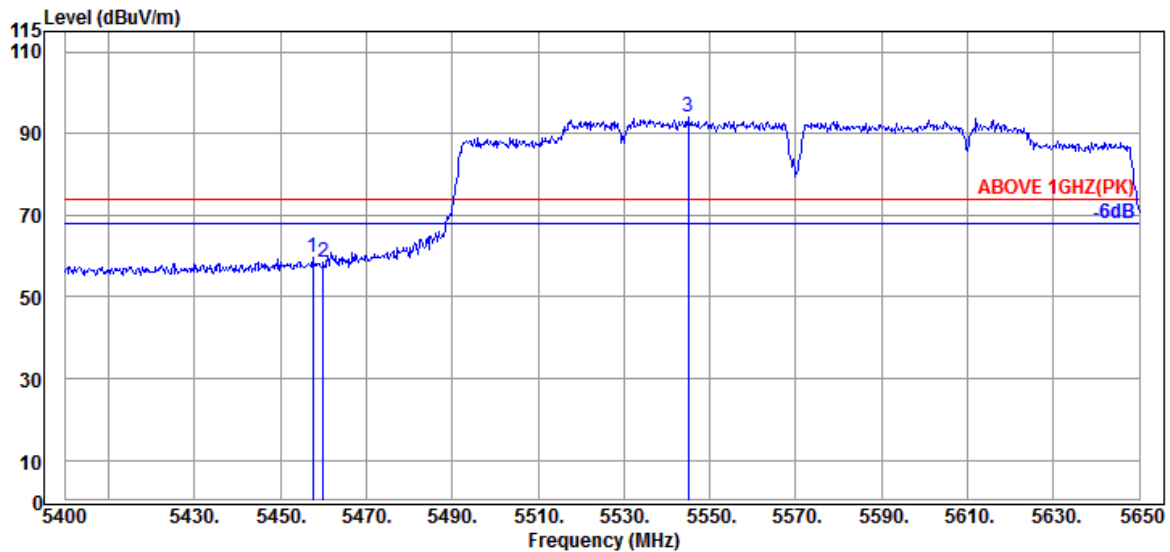

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.60	9.05	34.21	50.07	59.51	74.00	14.49	Peak
5460.000	34.60	9.05	34.21	48.85	58.29	74.00	15.71	Peak
@ 5545.000	34.70	9.10	34.23	84.58	94.15	---	---	Peak

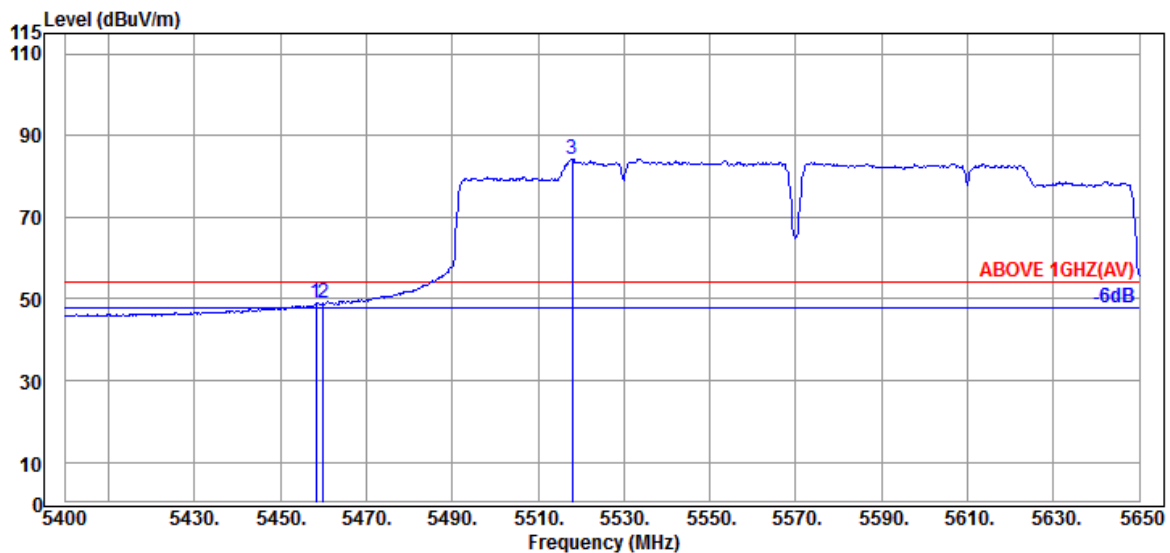

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.60	9.05	34.21	39.61	49.05	54.00	4.95	Average
5460.000	34.60	9.05	34.21	39.43	48.87	54.00	5.13	Average
@ 5518.000	34.70	9.09	34.21	74.69	84.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

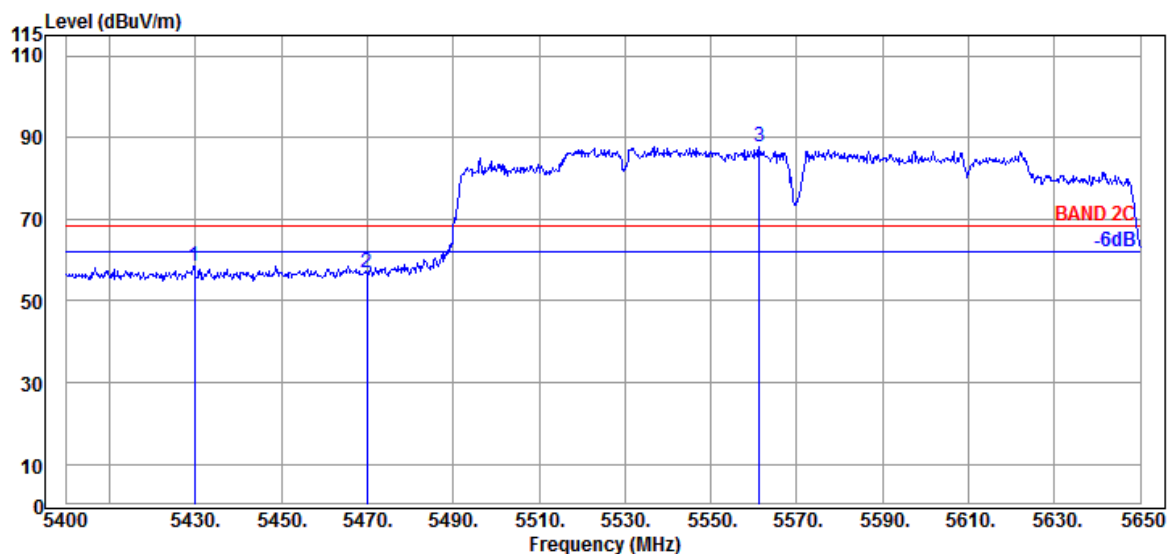

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5429.750	34.70	9.04	34.23	49.15	58.66	68.20	9.54	Peak
	5470.000	34.63	9.06	34.21	47.55	57.03	68.20	11.17	Peak
	5561.250	34.60	9.11	34.23	78.45	87.93	---	---	Peak

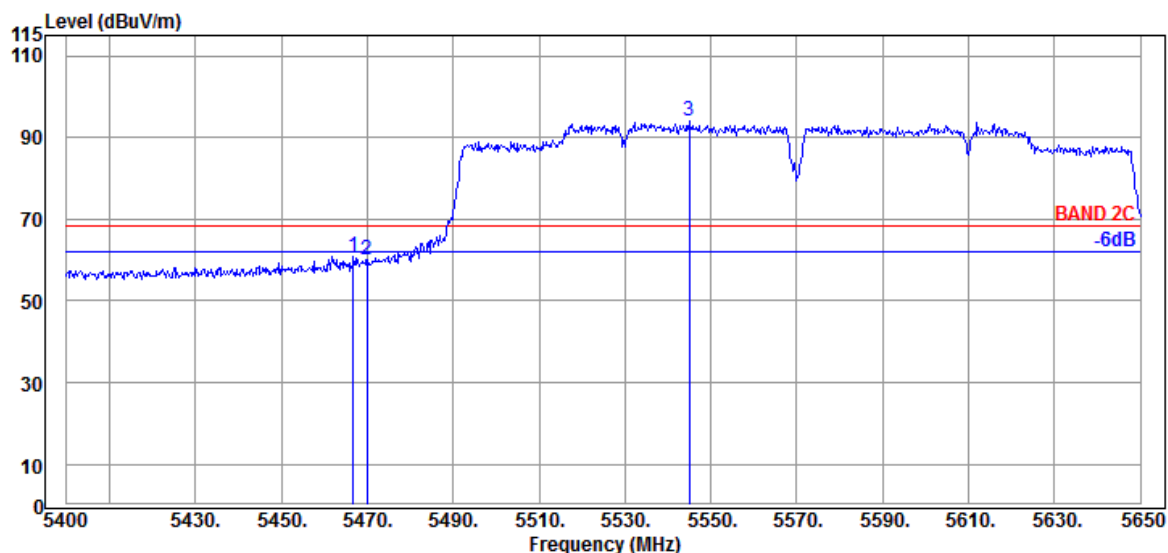

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5466.750	34.63	9.06	34.21	51.47	60.95	68.20	7.25	Peak
	5470.000	34.63	9.06	34.21	50.47	59.95	68.20	8.25	Peak
	5545.000	34.70	9.10	34.23	84.58	94.15	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

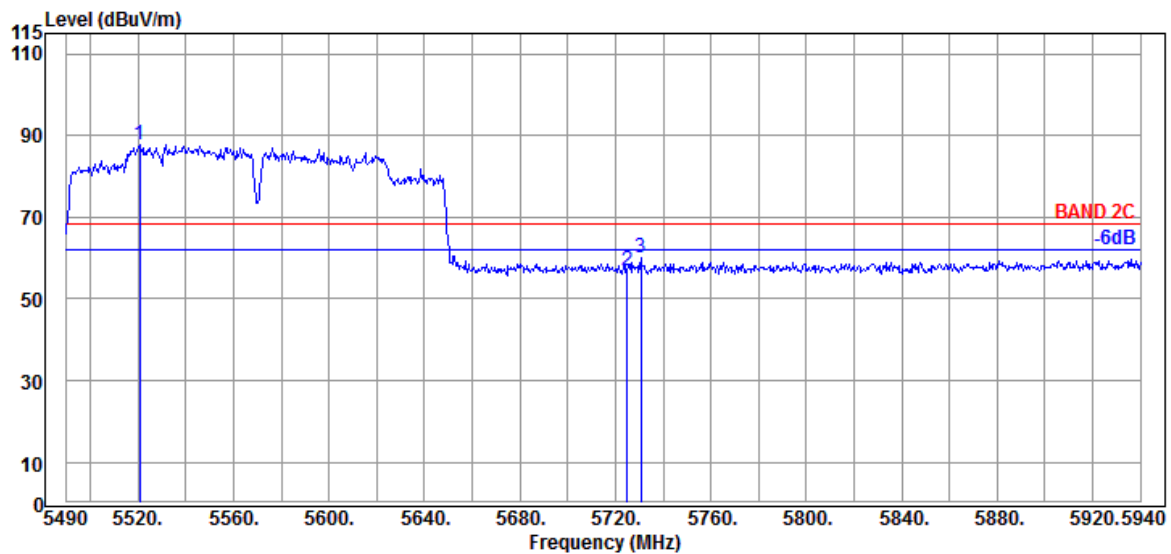

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5520.600	34.70	9.09	34.21	78.28	87.86	---	---	Peak
	5724.900	34.90	9.20	34.30	47.11	56.91	68.20	11.29	Peak
	5730.750	34.90	9.20	34.31	50.22	60.01	68.20	8.19	Peak

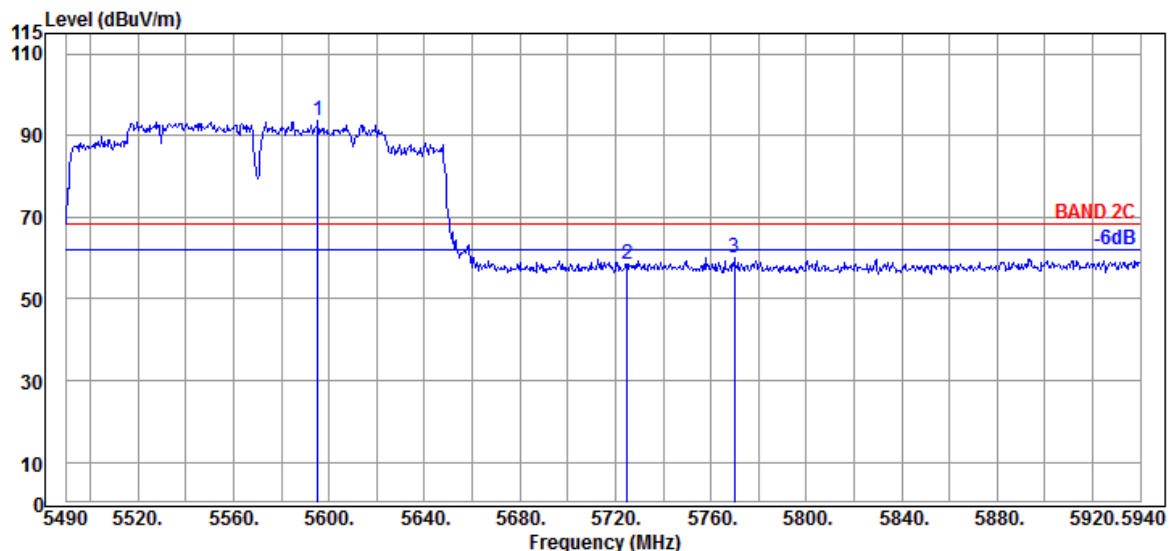

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5595.300	34.40	9.13	34.24	84.39	93.68	---	---	Peak
	5724.900	34.90	9.20	34.30	48.60	58.40	68.20	9.80	Peak
	5769.900	35.03	9.21	34.33	50.05	59.96	68.20	8.24	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

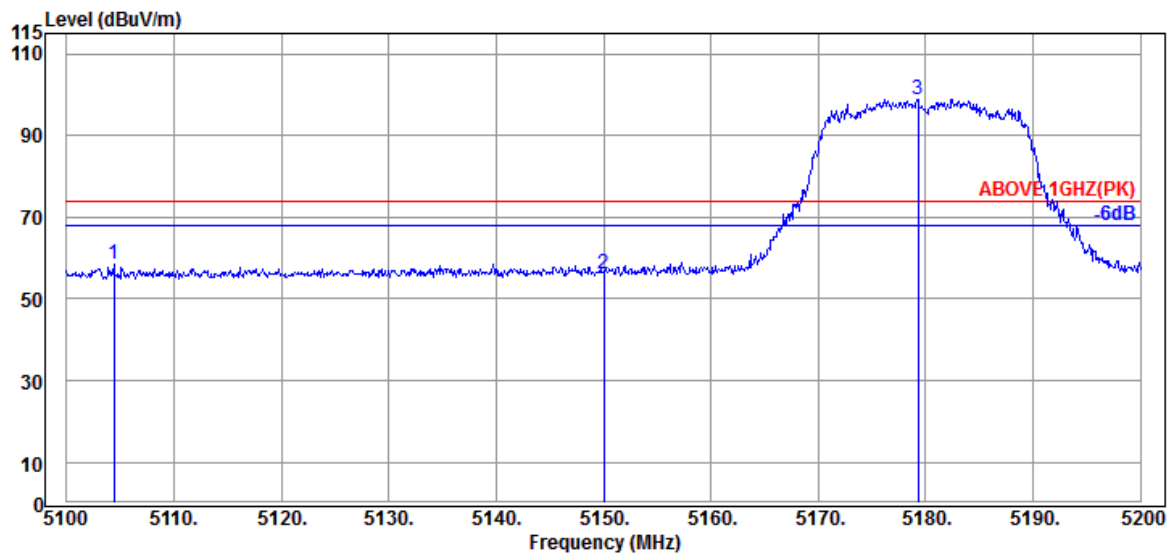

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.400	34.20	8.86	34.36	49.76	58.46	74.00	15.54	Peak
5150.000	34.50	8.88	34.34	47.20	56.24	74.00	17.76	Peak
@ 5179.300	34.63	8.90	34.32	89.56	98.77	---	---	Peak

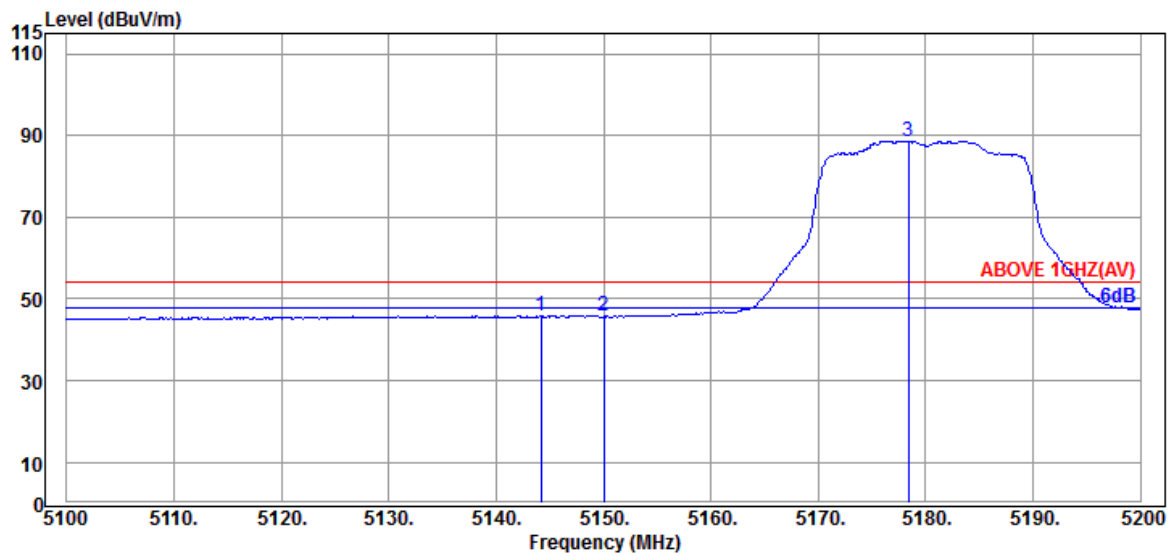

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.200	34.50	8.88	34.34	36.84	45.88	54.00	8.12	Peak
5150.000	34.50	8.88	34.34	36.64	45.68	54.00	8.32	Peak
@ 5178.400	34.63	8.90	34.32	79.45	88.66	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

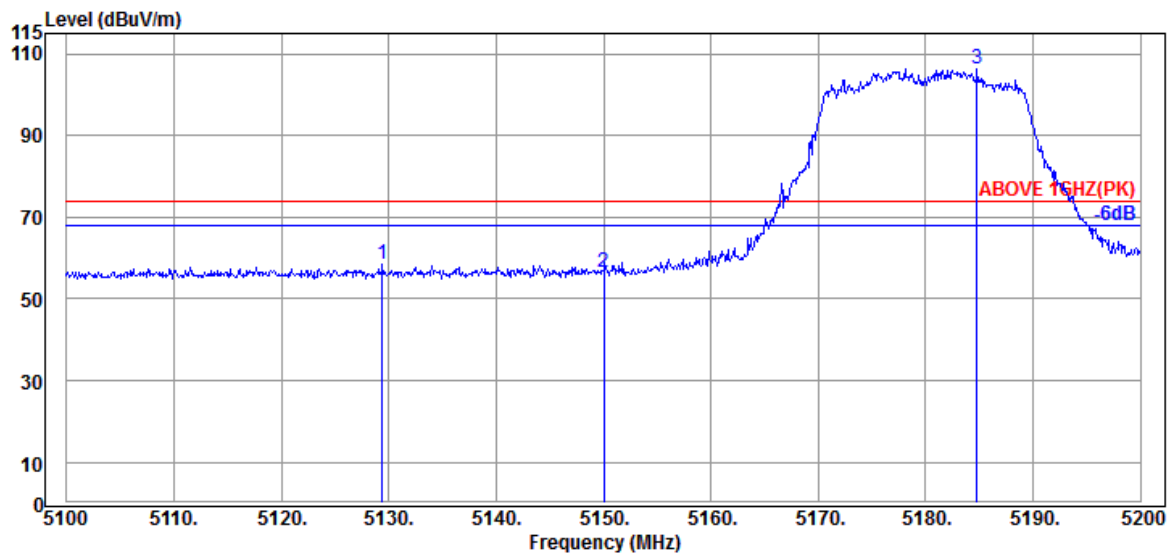

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5129.400	34.40	8.88	34.34	49.45	58.39	74.00	15.61	Peak
5150.000	34.50	8.88	34.34	47.37	56.41	74.00	17.59	Peak
@ 5184.800	34.63	8.90	34.32	96.98	106.19	---	---	Peak

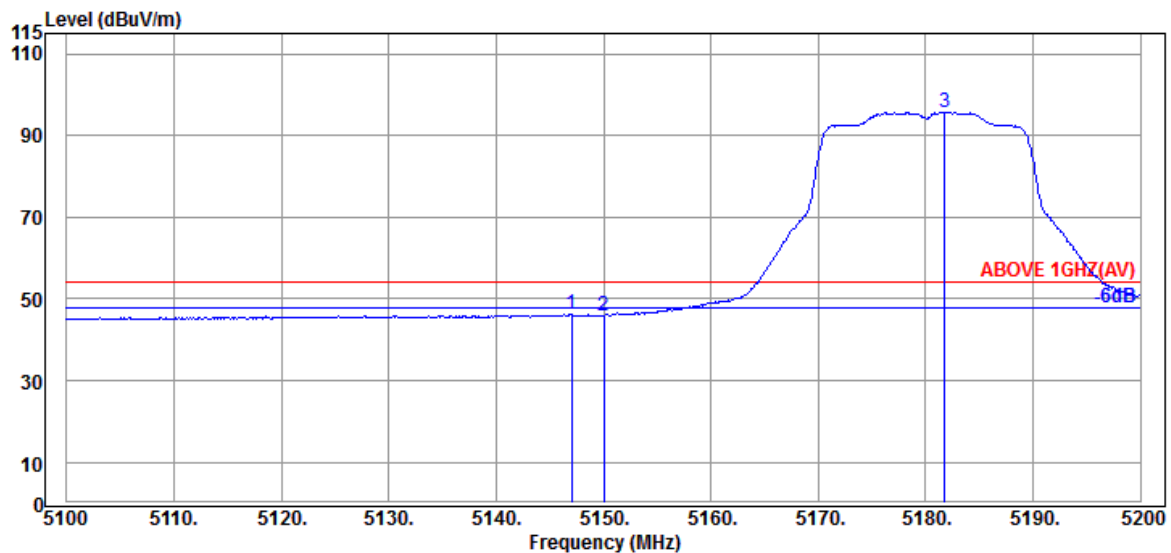

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.000	34.50	8.88	34.34	37.20	46.24	54.00	7.76	Average
5150.000	34.50	8.88	34.34	36.96	46.00	54.00	8.00	Average
@ 5181.800	34.63	8.90	34.32	86.55	95.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

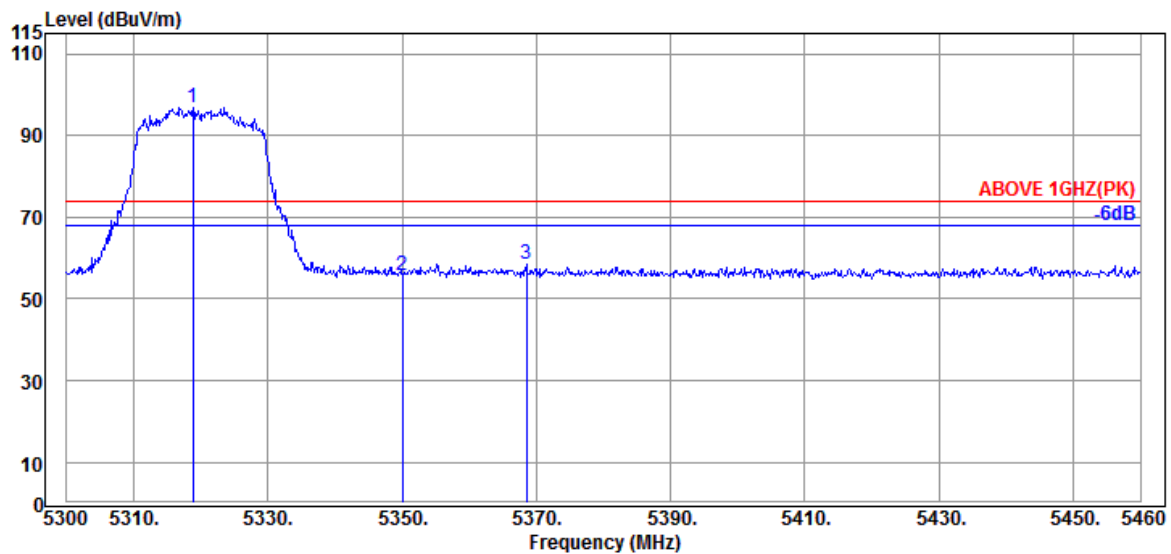

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.880	34.57	8.98	34.27	87.61	96.89	---	---	Peak
5350.080	34.90	8.99	34.26	46.25	55.88	74.00	18.12	Peak
5368.480	34.87	9.00	34.25	48.93	58.55	74.00	15.45	Peak

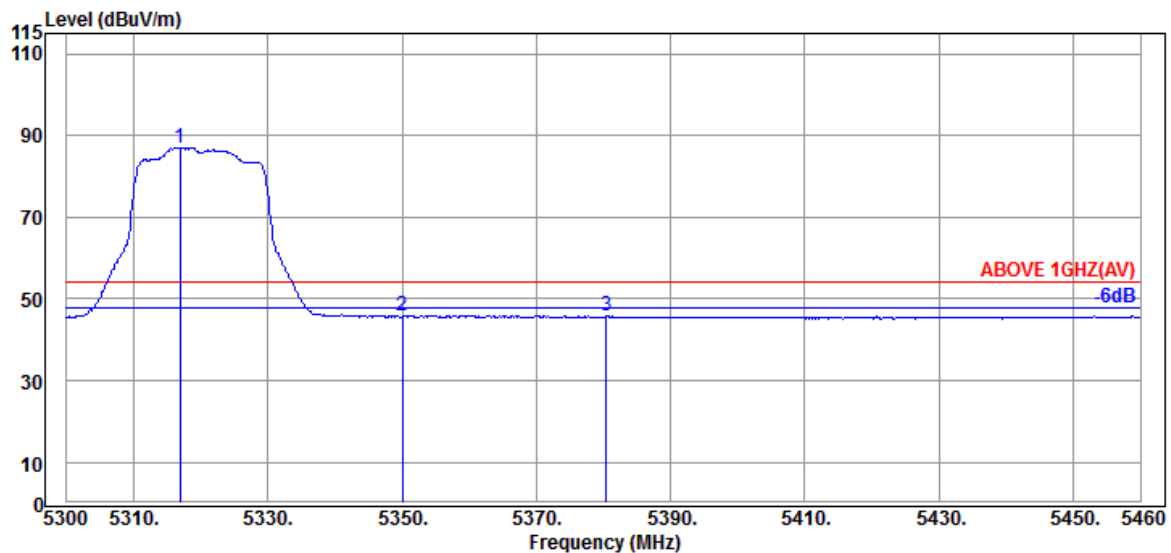

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.960	34.57	8.98	34.27	77.74	87.02	---	---	Average
5350.080	34.90	8.99	34.26	36.03	45.66	54.00	8.34	Average
5380.480	34.83	9.01	34.25	36.40	45.99	54.00	8.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

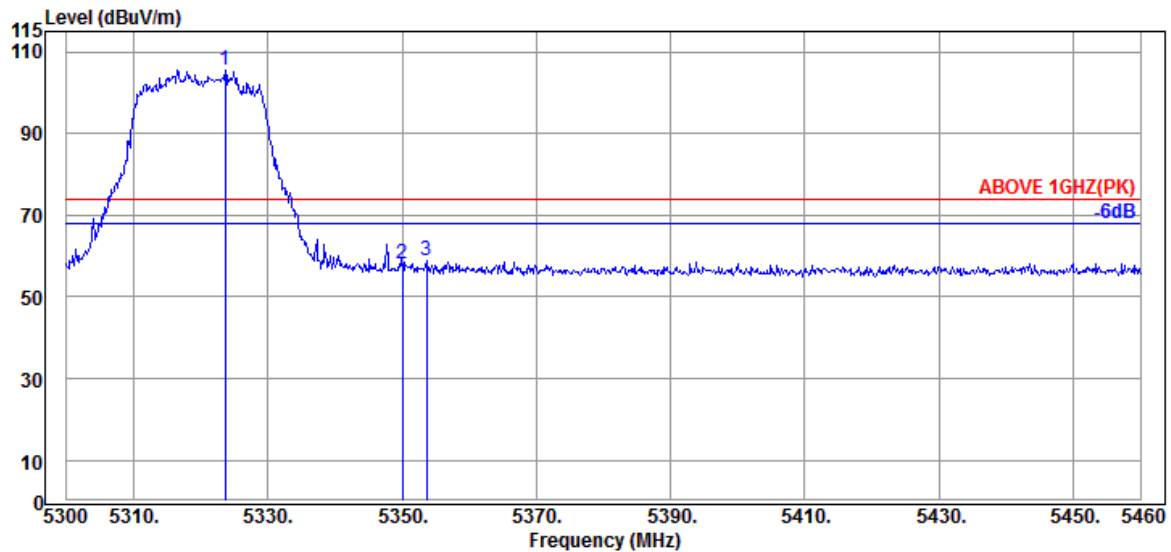

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	34.73	8.99	34.27	96.22	105.67	---	---	Peak
5350.080	34.90	8.99	34.26	48.46	58.09	74.00	15.91	Peak
5353.600	34.90	8.99	34.26	49.15	58.78	74.00	15.22	Peak

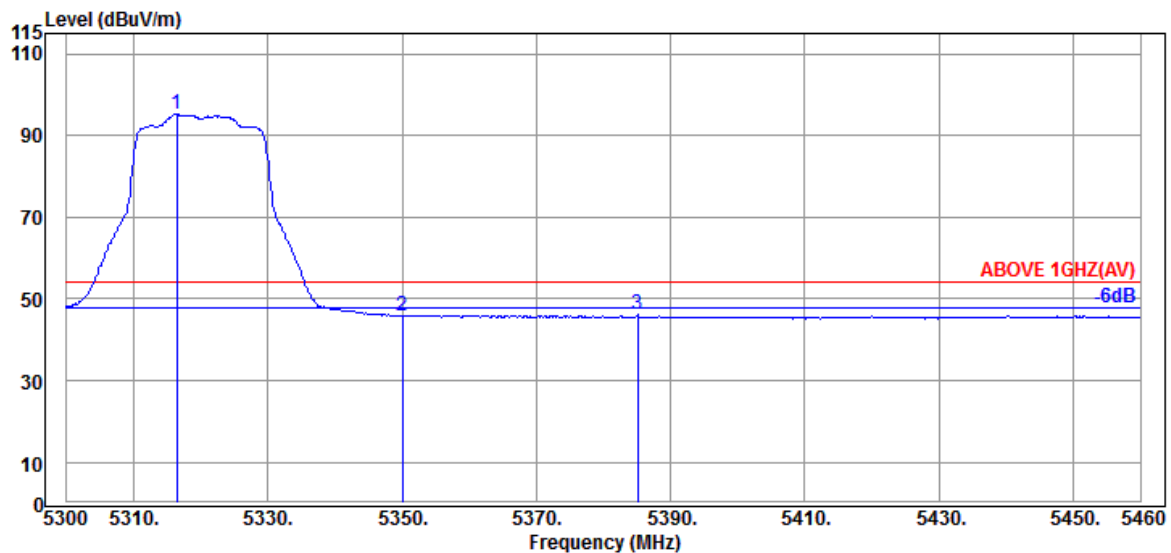

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.57	8.98	34.27	85.89	95.17	---	---	Average
5350.080	34.90	8.99	34.26	36.22	45.85	54.00	8.15	Average
5385.120	34.83	9.01	34.24	36.46	46.06	54.00	7.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

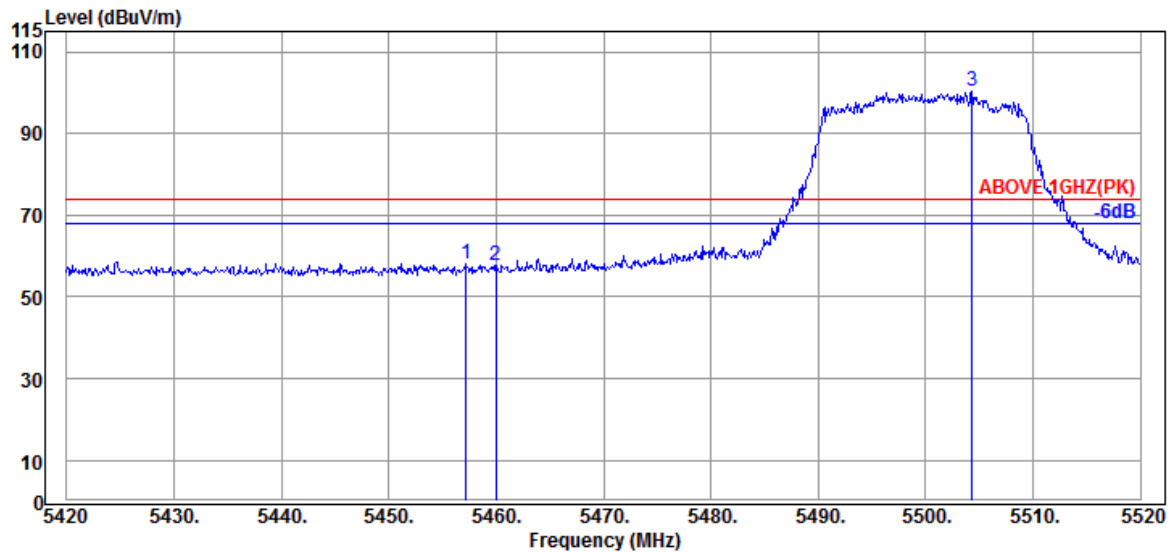

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.200	34.60	9.05	34.21	48.73	58.17	74.00	15.83	Peak
5460.000	34.60	9.05	34.21	48.11	57.55	74.00	16.45	Peak
@ 5504.300	34.70	9.08	34.20	90.74	100.32	---	---	Peak

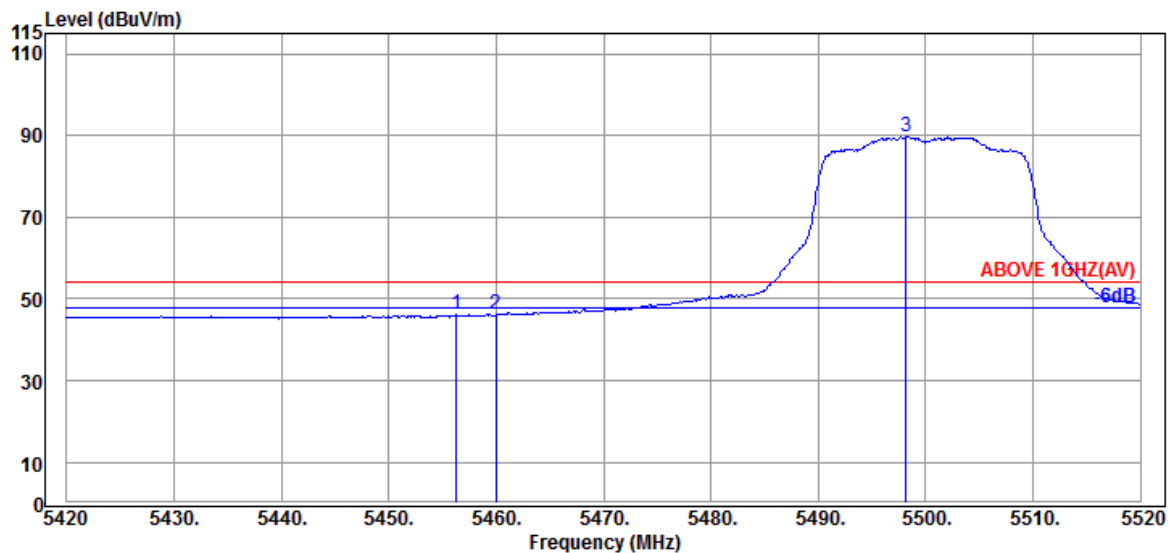

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5456.300	34.60	9.05	34.21	36.75	46.19	54.00	7.81	Average
5460.000	34.60	9.05	34.21	36.62	46.06	54.00	7.94	Average
@ 5498.200	34.70	9.08	34.20	80.04	89.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

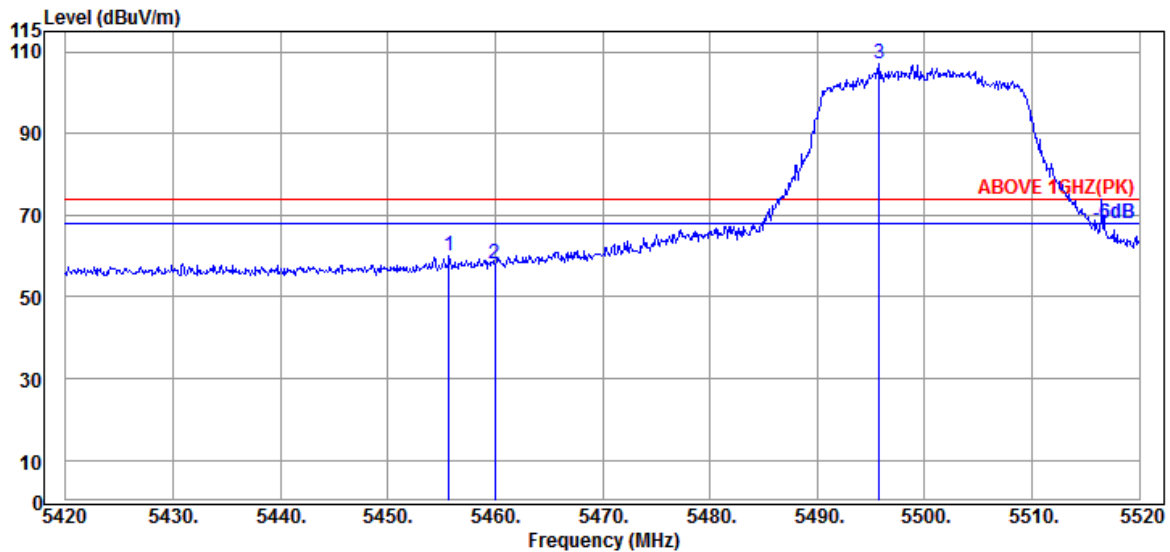

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5455.700	34.60	9.05	34.21	50.50	59.94	74.00	14.06	Peak
5460.000	34.60	9.05	34.21	48.81	58.25	74.00	15.75	Peak
@ 5495.800	34.70	9.08	34.20	97.37	106.95	---	---	Peak

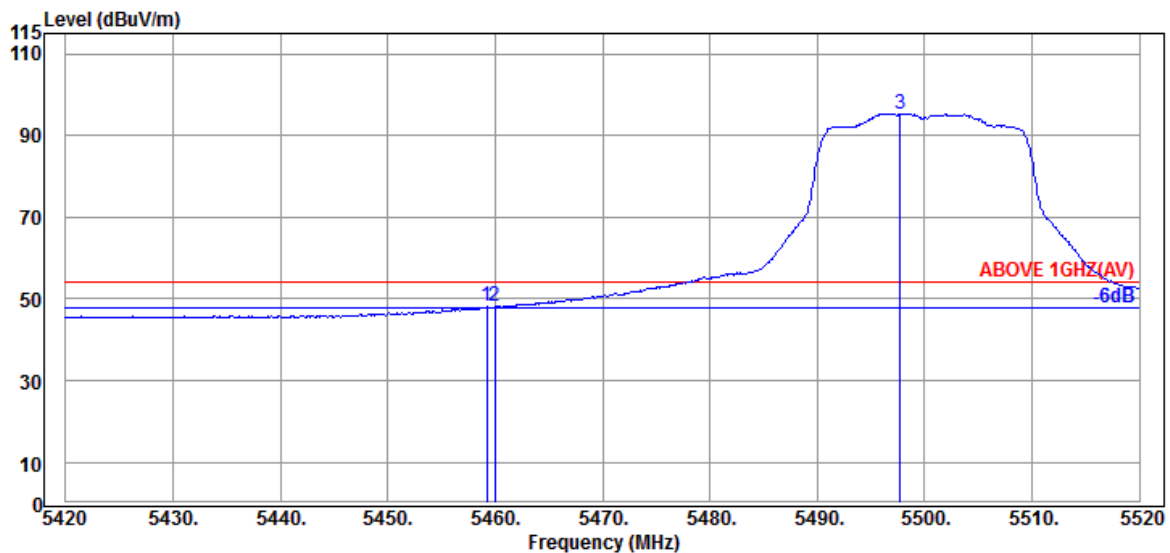

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.200	34.60	9.05	34.21	38.69	48.13	54.00	5.87	Average
5460.000	34.60	9.05	34.21	38.63	48.07	54.00	5.93	Average
@ 5497.700	34.70	9.08	34.20	85.78	95.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

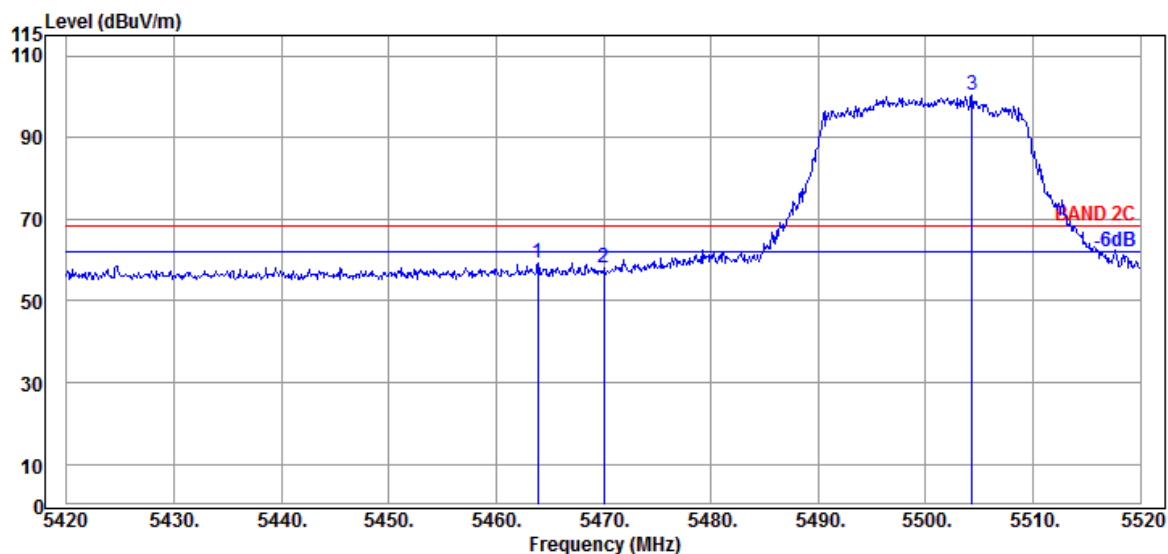

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5463.900	34.63	9.06	34.21	49.94	59.42	68.20	8.78	Peak
5470.000	34.63	9.06	34.21	48.70	58.18	68.20	10.02	Peak
5504.300	34.70	9.08	34.20	90.74	100.32	---	---	Peak

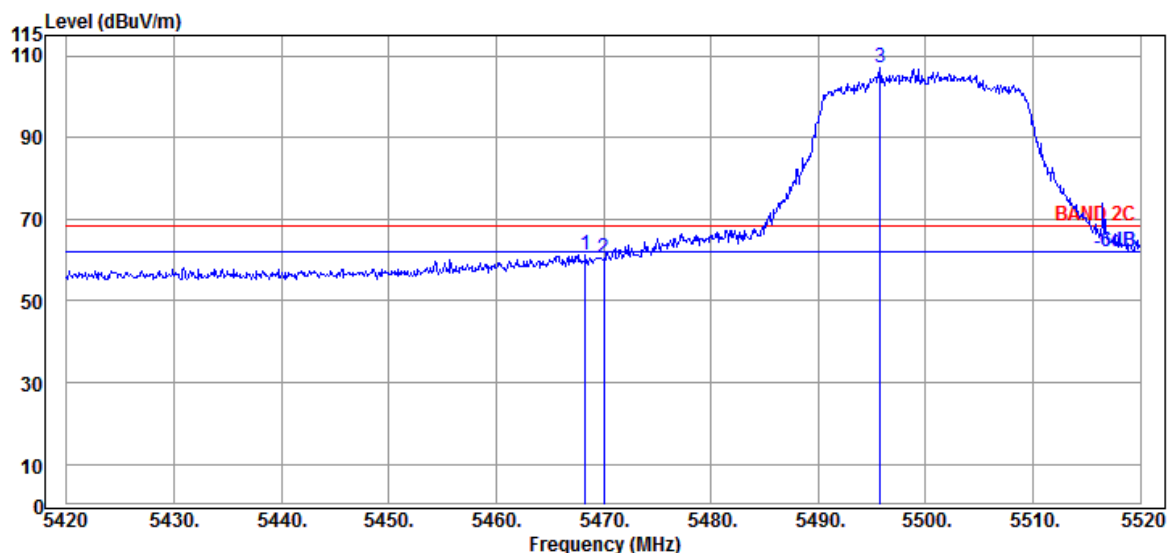

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.300	34.63	9.06	34.21	51.86	61.34	68.20	6.86	Peak
5470.000	34.63	9.06	34.21	50.91	60.39	68.20	7.81	Peak
5495.800	34.70	9.08	34.20	97.37	106.95	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

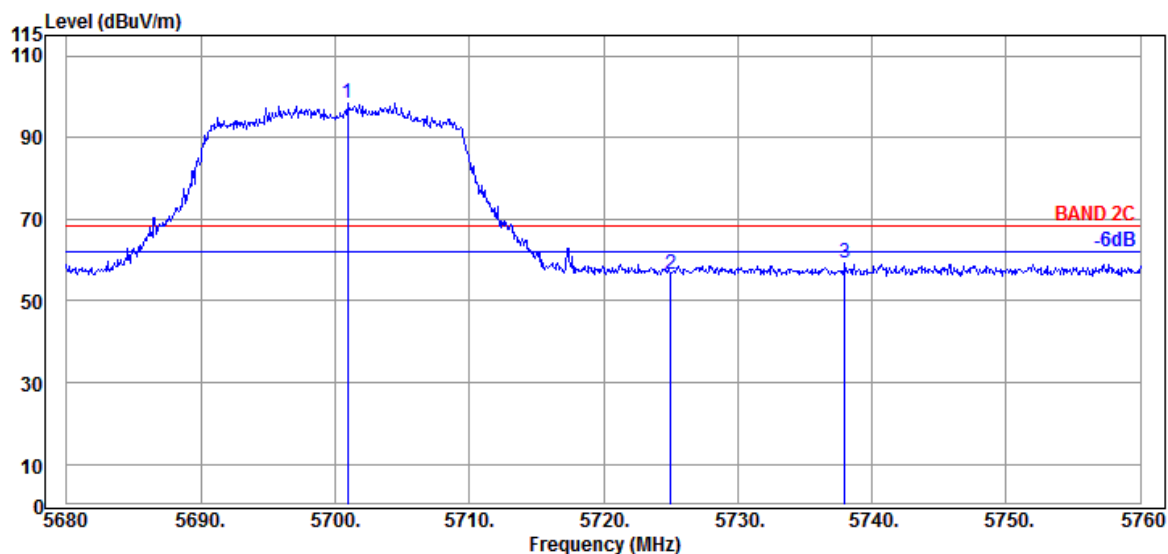

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.960	34.70	9.18	34.29	88.63	98.22	---	---	Peak
5725.040	34.90	9.20	34.30	46.71	56.51	68.20	11.69	Peak
5738.000	34.90	9.20	34.31	49.54	59.33	68.20	8.87	Peak

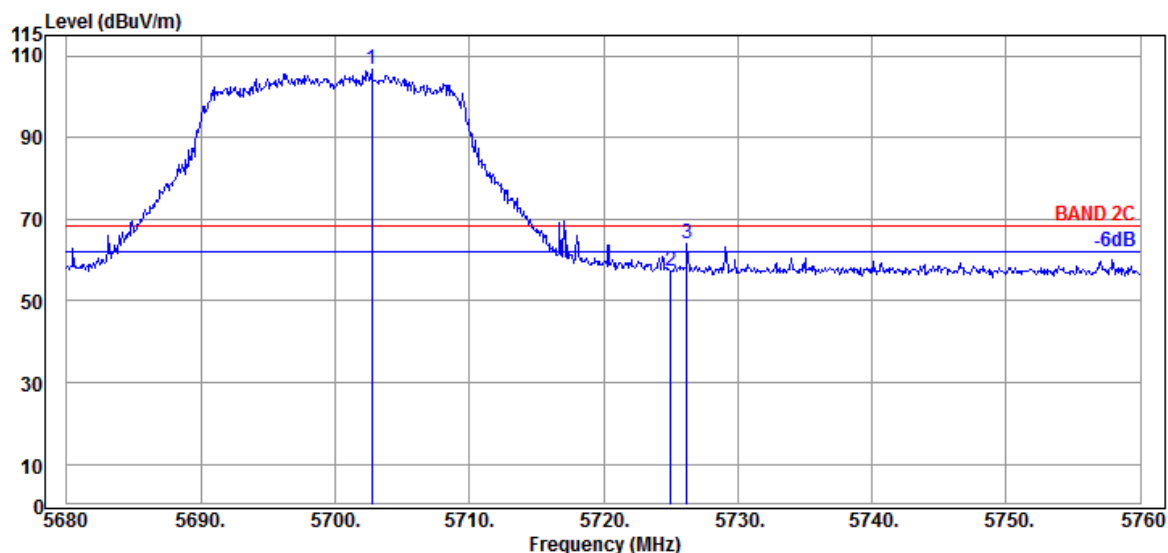

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.720	34.70	9.18	34.29	97.15	106.74	---	---	Peak
5725.040	34.90	9.20	34.30	47.63	57.43	68.20	10.77	Peak
5726.240	34.90	9.20	34.30	54.26	64.06	68.20	4.14	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

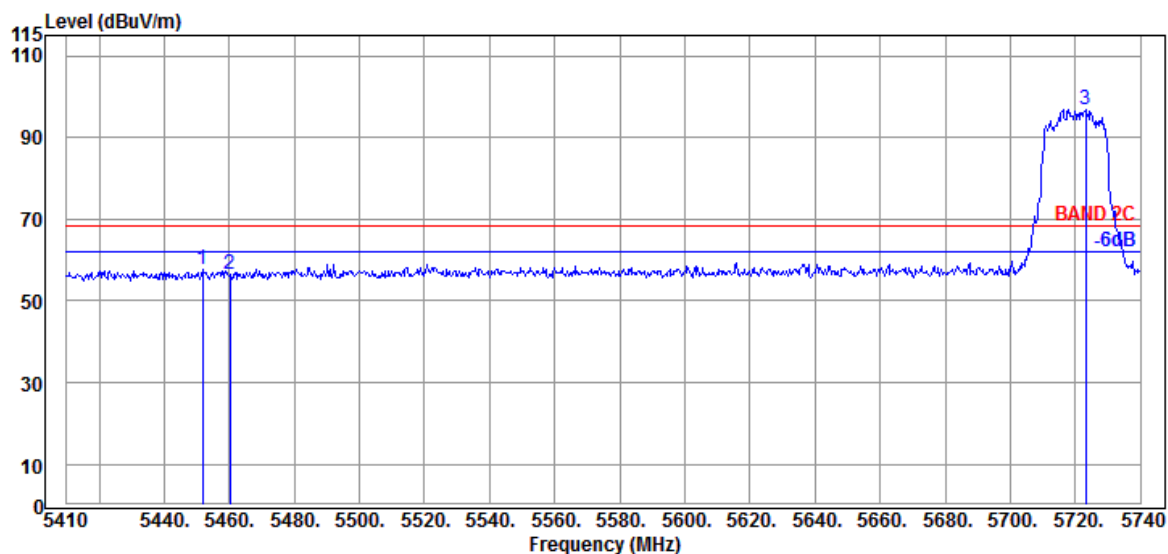

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5451.910	34.60	9.05	34.21	48.10	57.54	68.20	10.66	Peak
	5460.160	34.60	9.05	34.21	46.90	56.34	68.20	11.86	Peak
	5723.170	34.90	9.20	34.30	87.14	96.94	---	---	Peak

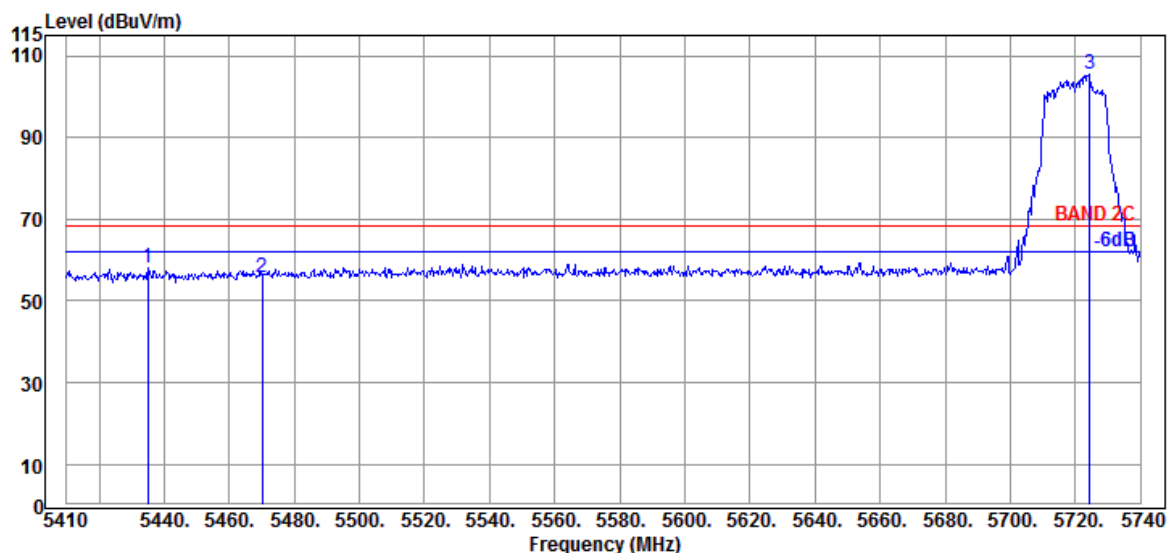

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5435.080	34.65	9.04	34.22	48.75	58.22	68.20	9.98	Peak
	5470.060	34.63	9.06	34.21	46.30	55.78	68.20	12.42	Peak
	5724.490	34.90	9.20	34.30	95.86	105.66	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

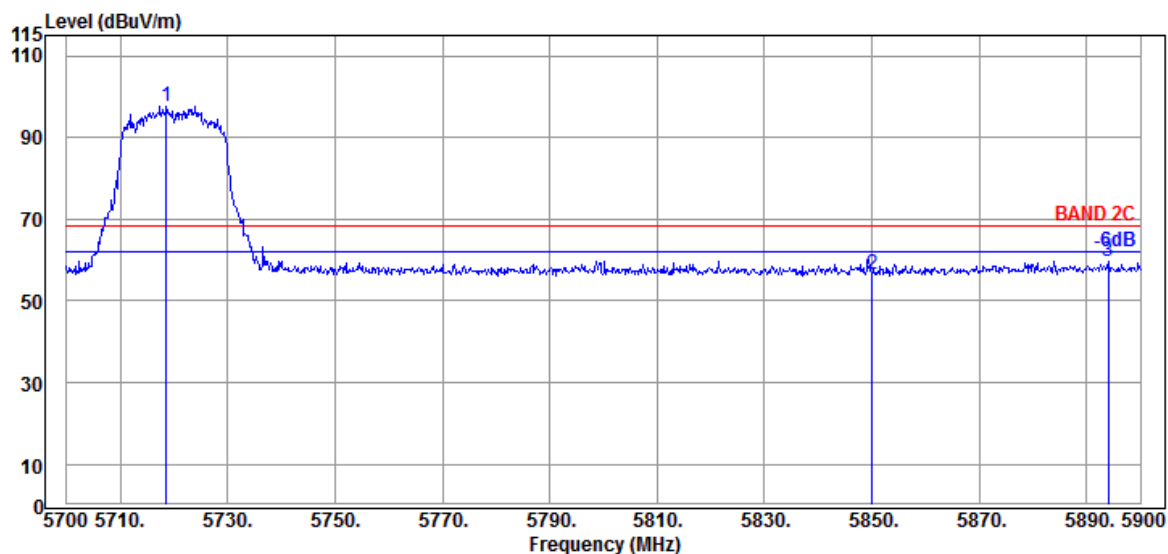

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.600	34.80	9.19	34.30	87.97	97.66	---	---	Peak
5850.000	35.40	9.25	34.36	46.14	56.43	68.20	11.77	Peak
5894.000	35.80	9.28	34.38	48.84	59.54	68.20	8.66	Peak

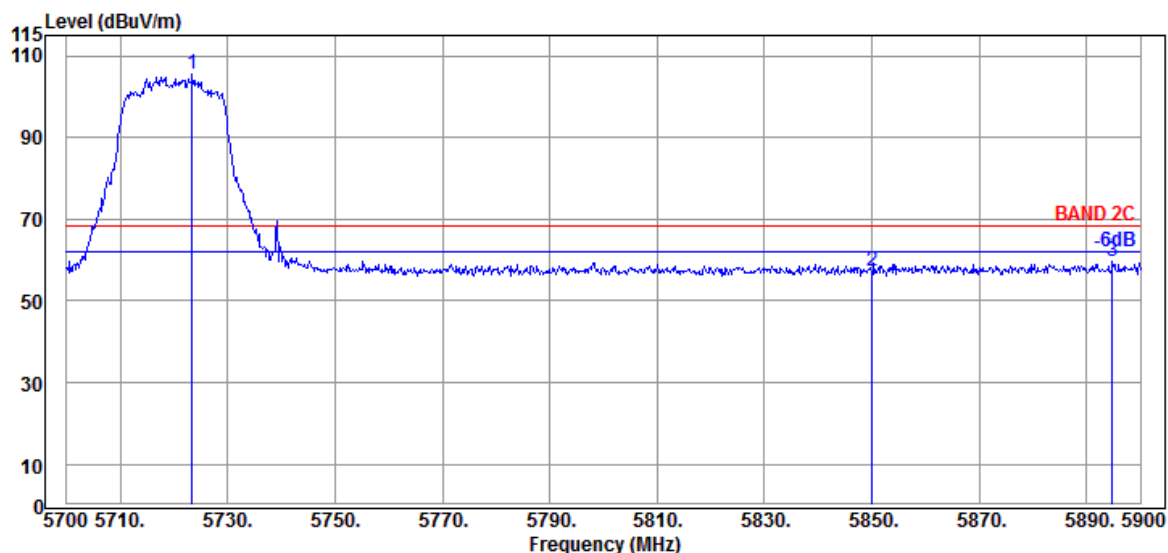

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.400	34.90	9.20	34.30	95.77	105.57	---	---	Peak
5850.000	35.40	9.25	34.36	46.99	57.28	68.20	10.92	Peak
5894.800	35.80	9.28	34.38	48.91	59.61	68.20	8.59	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

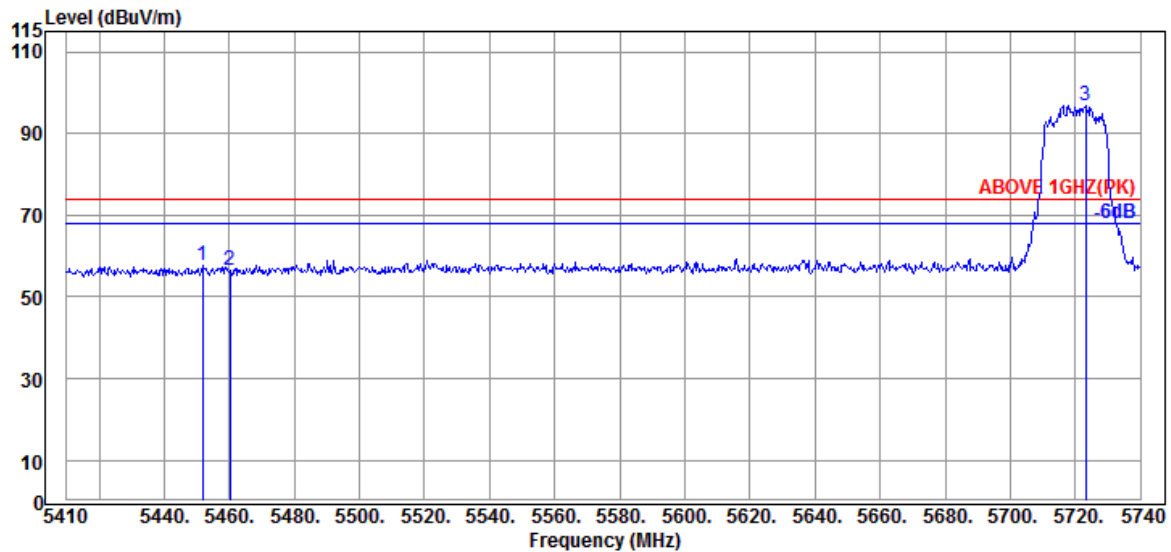

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.910	34.60	9.05	34.21	48.10	57.54	74.00	16.46	Peak
5460.160	34.60	9.05	34.21	46.90	56.34	74.00	17.66	Peak
@ 5723.170	34.90	9.20	34.30	87.14	96.94	---	---	Peak

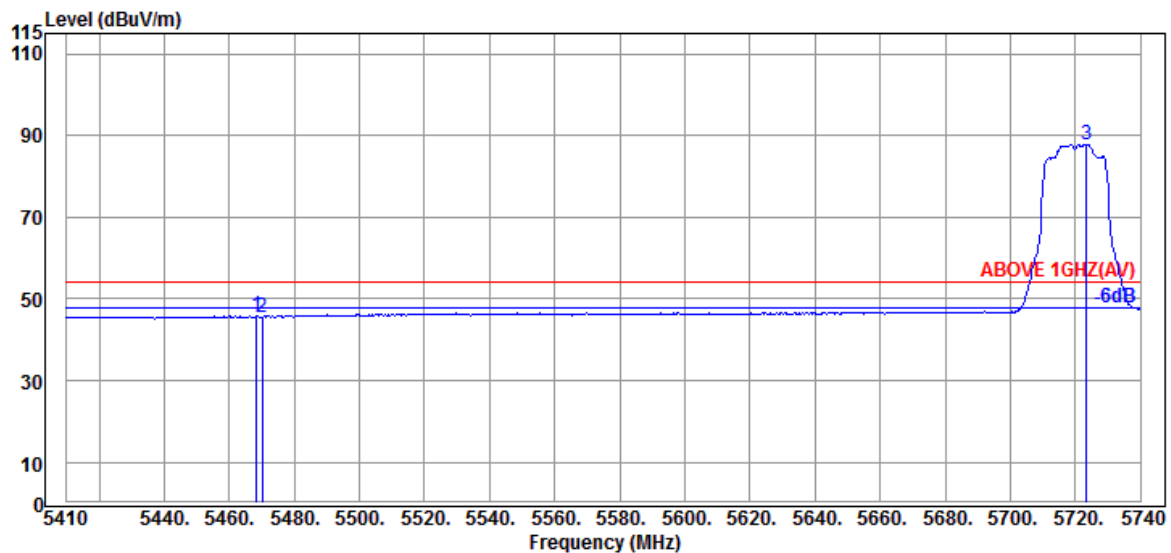

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.410	34.63	9.06	34.21	36.32	45.80	54.00	8.20	Average
5470.060	34.63	9.06	34.21	36.16	45.64	54.00	8.36	Average
@ 5723.500	34.90	9.20	34.30	78.07	87.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

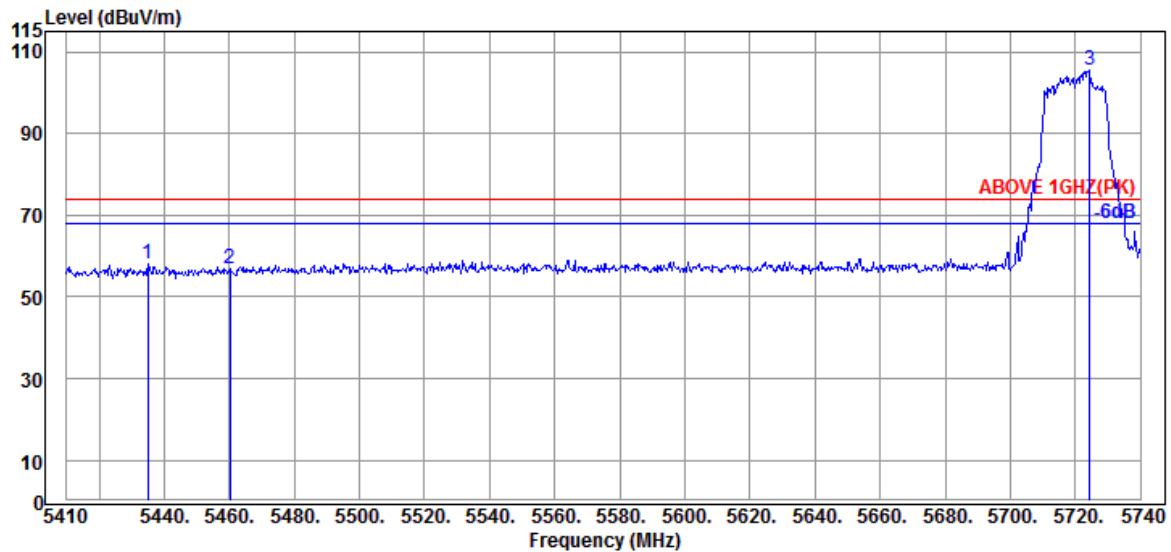

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.080	34.65	9.04	34.22	48.75	58.22	74.00	15.78	Peak
5460.160	34.60	9.05	34.21	47.57	57.01	74.00	16.99	Peak
@ 5724.490	34.90	9.20	34.30	95.86	105.66	---	---	Peak

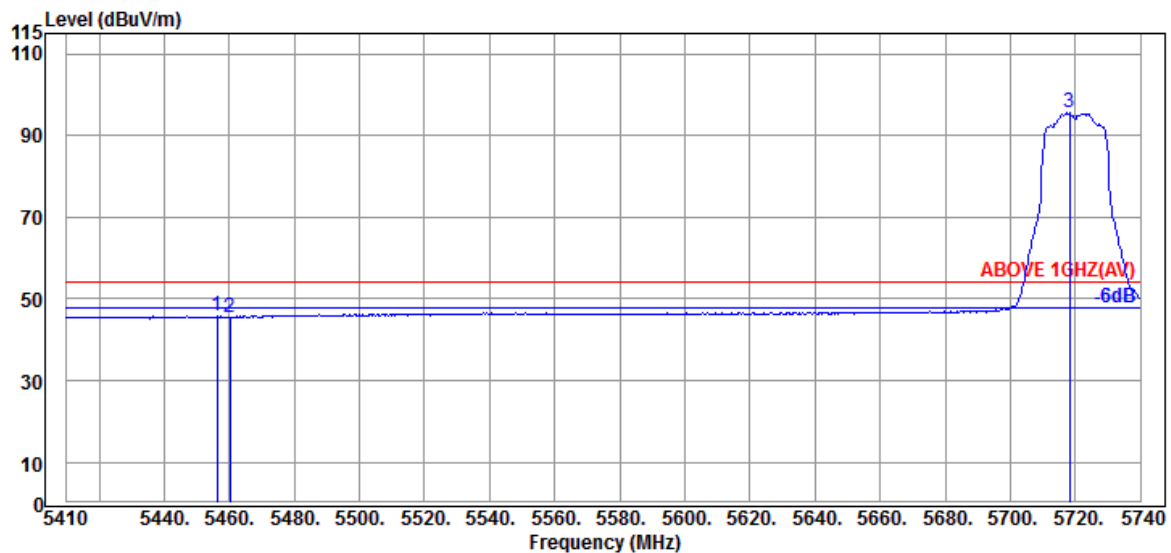

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.60	9.05	34.21	36.41	45.85	54.00	8.15	Average
5460.160	34.60	9.05	34.21	36.15	45.59	54.00	8.41	Average
@ 5718.220	34.80	9.19	34.30	85.85	95.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

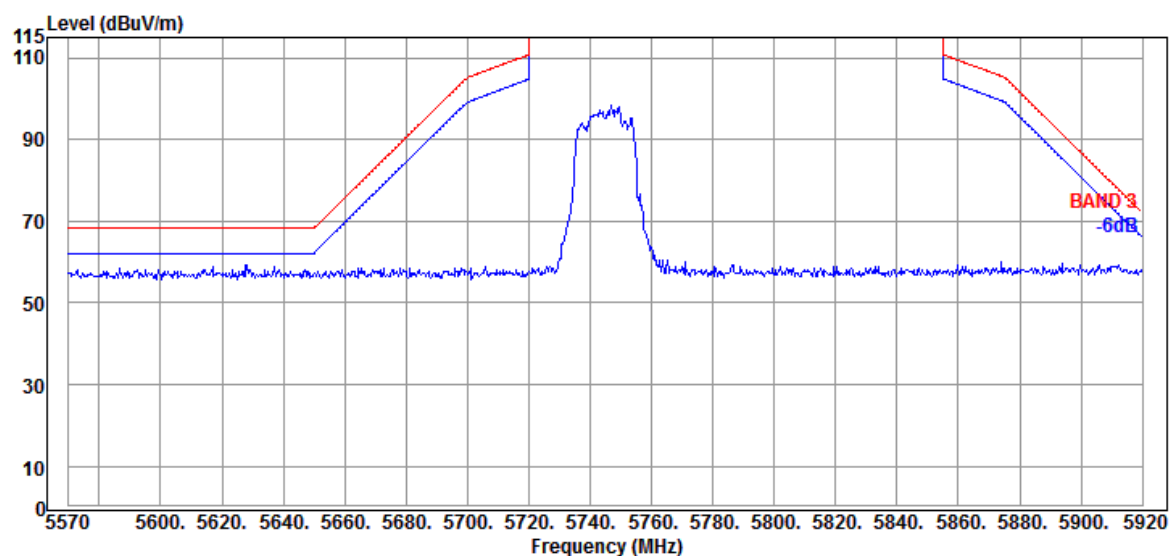

Antenna at Vertical Polarization

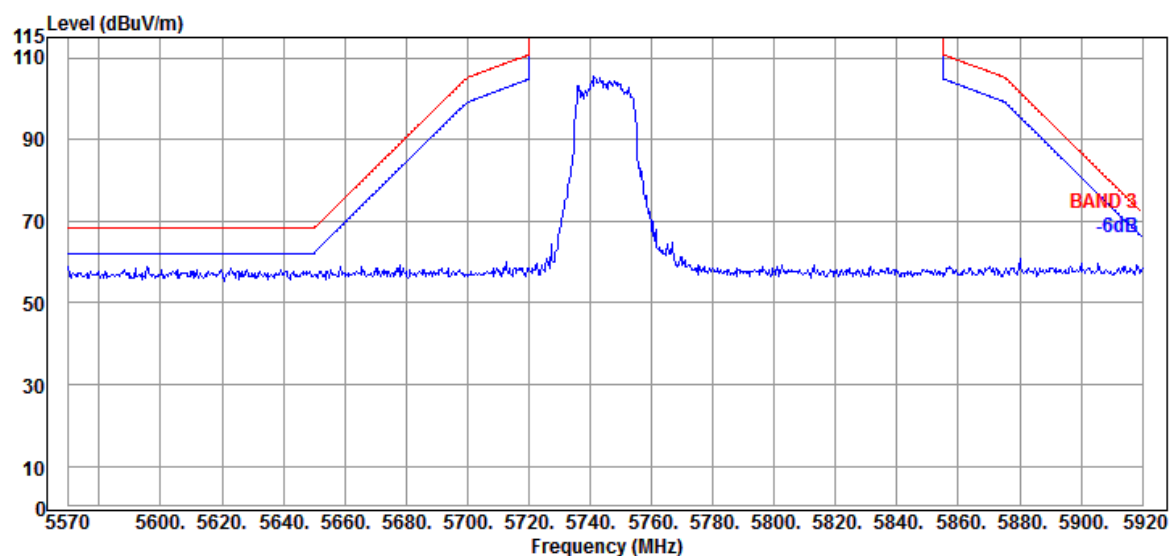


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

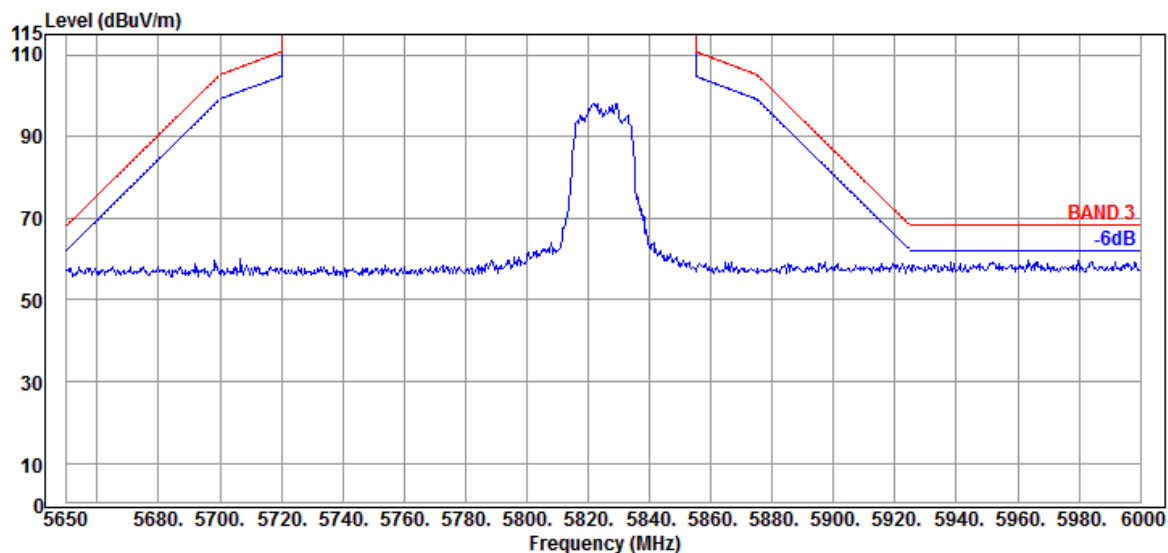

Antenna at Vertical Polarization

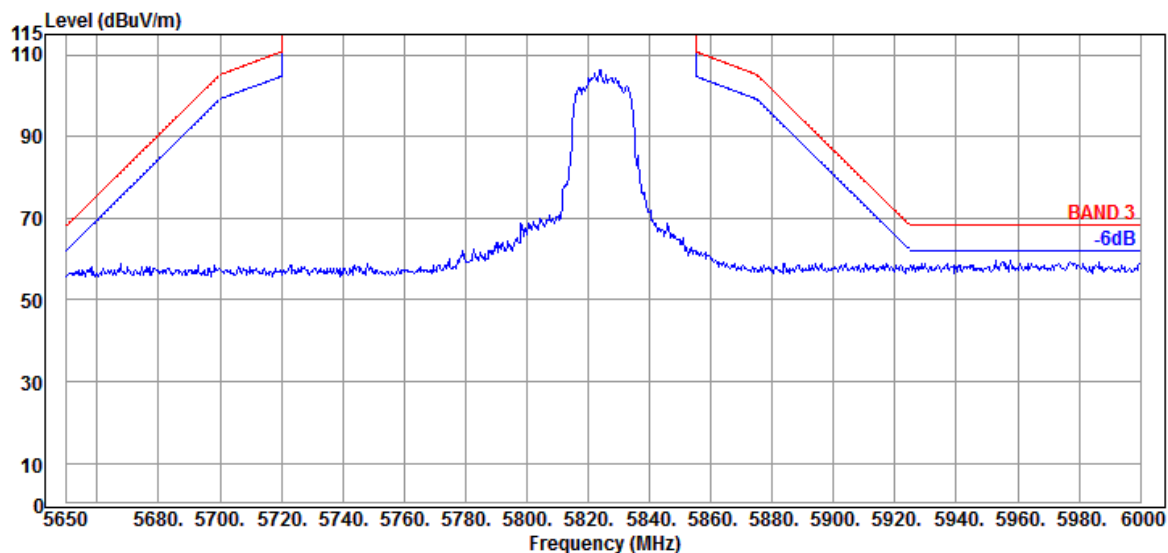

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

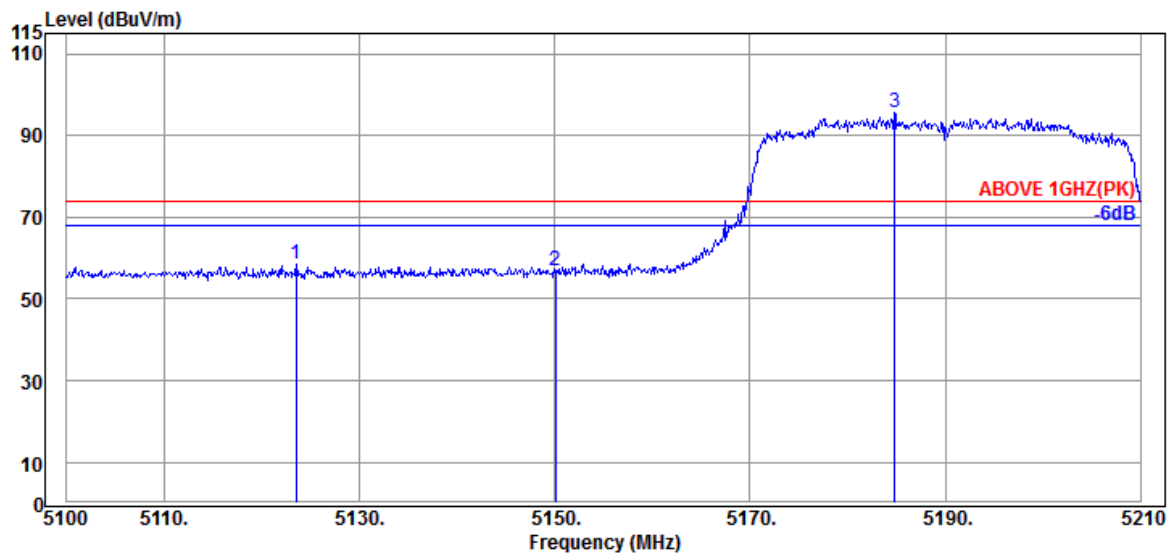

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.540	34.30	8.87	34.34	49.54	58.37	74.00	15.63	Peak
5150.050	34.50	8.88	34.34	47.75	56.79	74.00	17.21	Peak
@ 5184.810	34.63	8.90	34.32	86.35	95.56	---	---	Peak

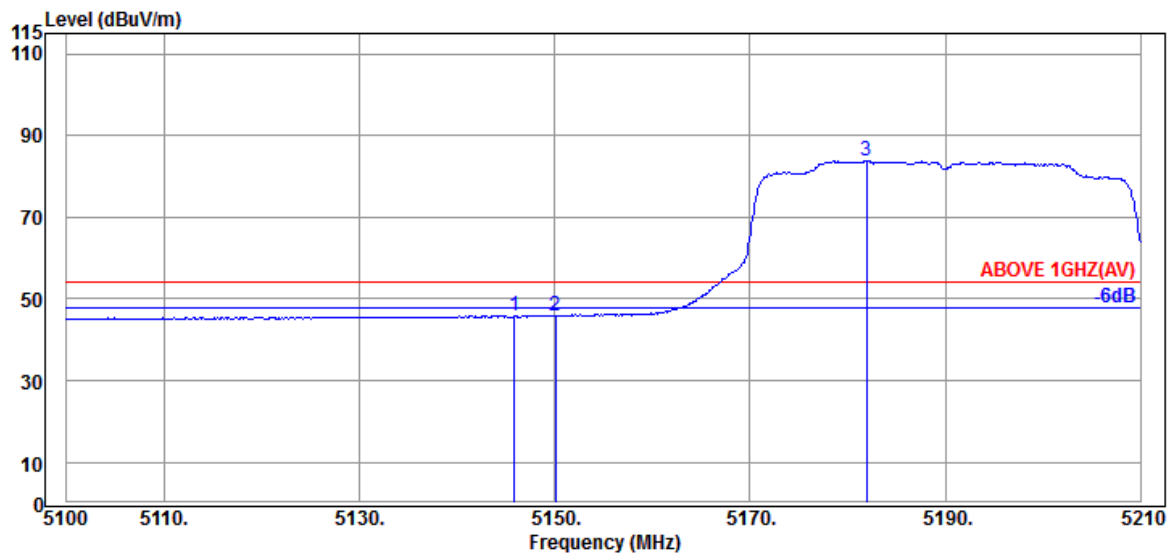

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.870	34.50	8.88	34.34	36.95	45.99	54.00	8.01	Average
5150.050	34.50	8.88	34.34	36.86	45.90	54.00	8.10	Average
@ 5181.950	34.63	8.90	34.32	74.67	83.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

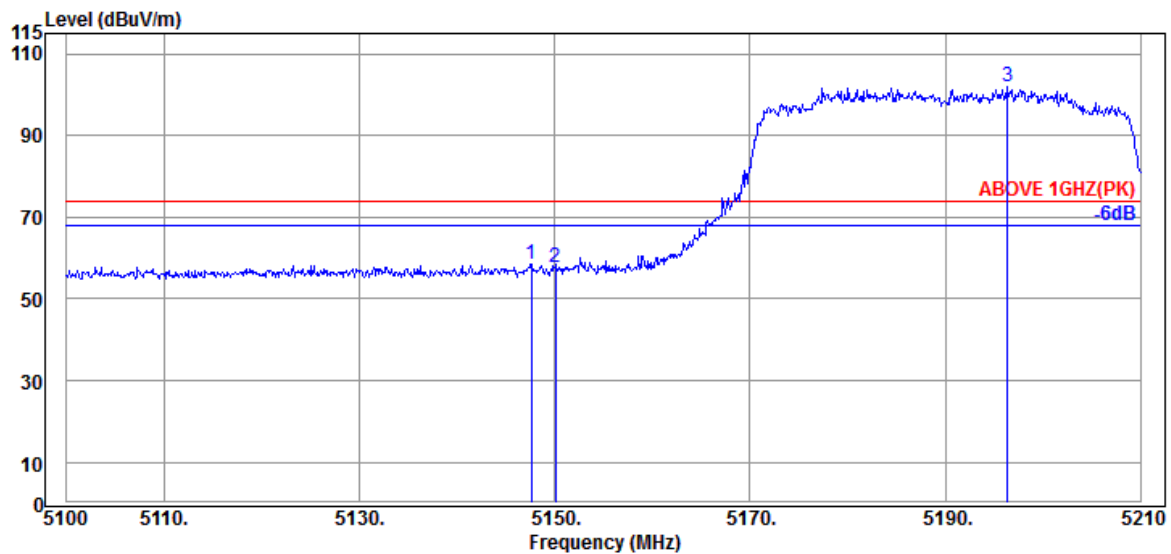

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.630	34.50	8.88	34.34	49.56	58.60	74.00	15.40	Peak
5150.050	34.50	8.88	34.34	48.65	57.69	74.00	16.31	Peak
@ 5196.360	34.70	8.91	34.32	92.74	102.03	---	---	Peak

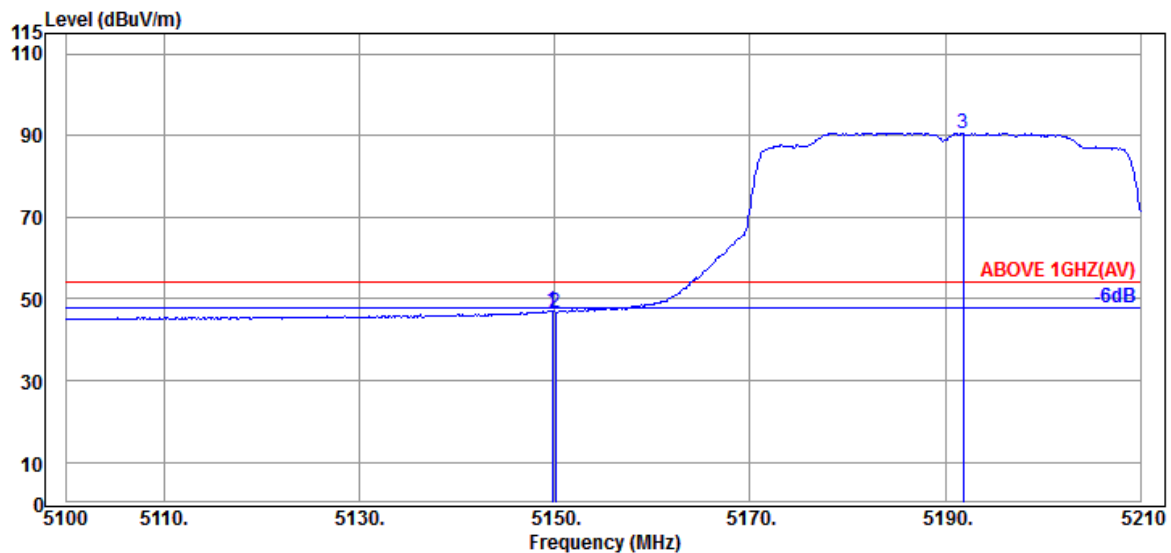

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.50	8.88	34.34	38.05	47.09	54.00	6.91	Average
5150.050	34.50	8.88	34.34	37.70	46.74	54.00	7.26	Average
@ 5191.850	34.70	8.91	34.32	81.30	90.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

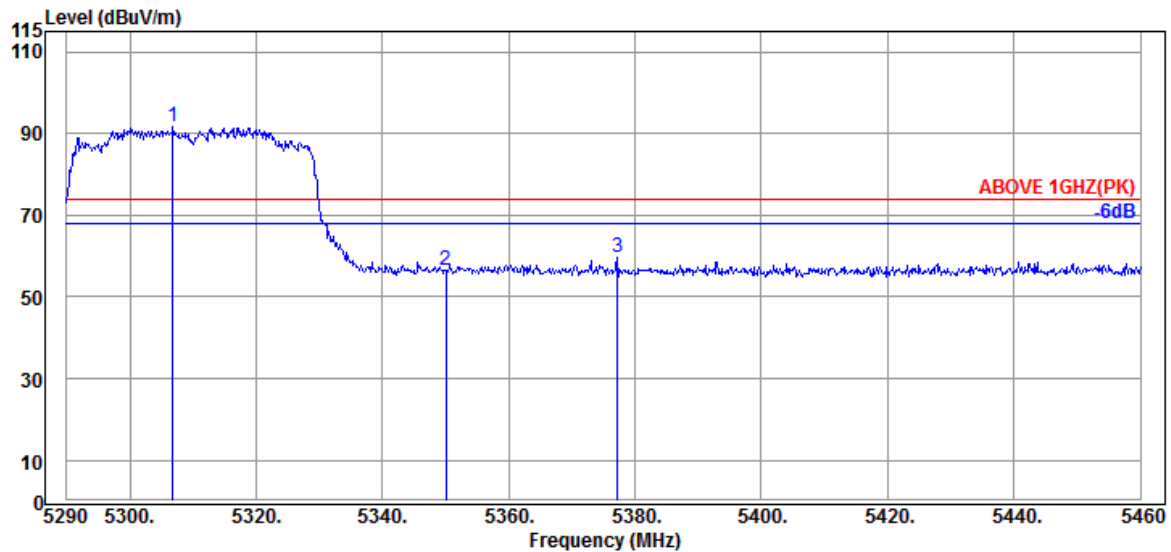

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.830	34.40	8.97	34.28	82.76	91.85	---	---	Peak
5350.010	34.90	8.99	34.26	46.77	56.40	74.00	17.60	Peak
5377.210	34.83	9.01	34.25	49.91	59.50	74.00	14.50	Peak

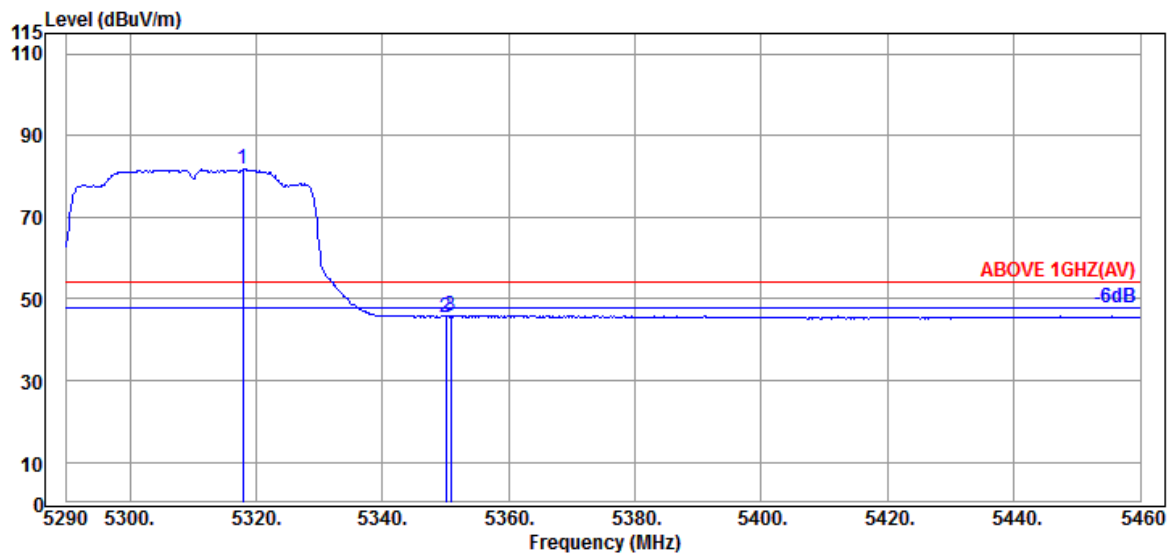

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.880	34.57	8.98	34.27	72.54	81.82	---	---	Average
5350.010	34.90	8.99	34.26	36.01	45.64	54.00	8.36	Average
5350.860	34.90	8.99	34.26	36.40	46.03	54.00	7.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

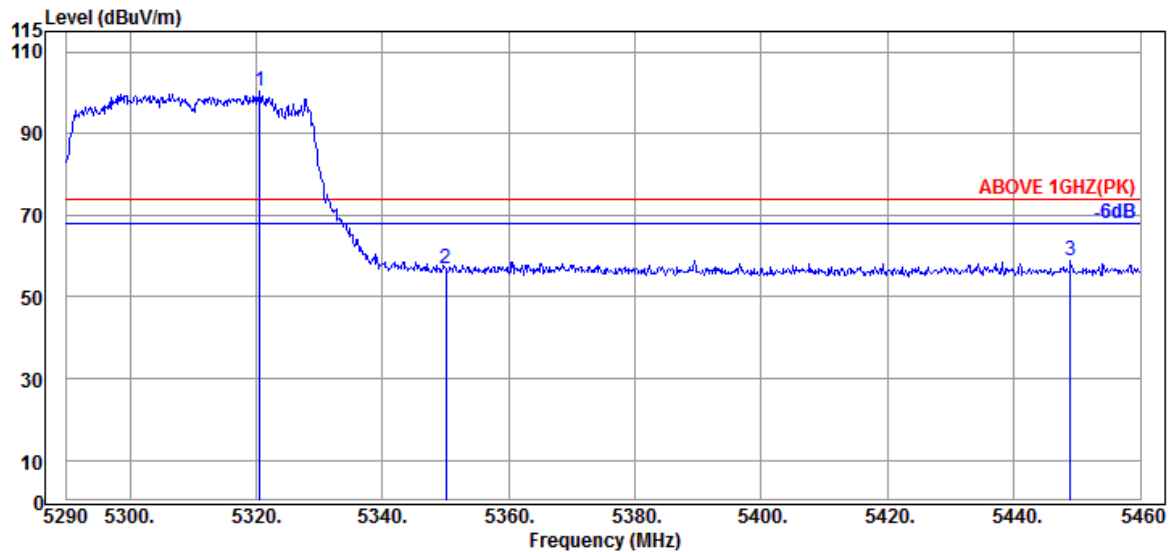

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.600	34.57	8.98	34.27	91.01	100.29	---	---	Peak
5350.010	34.90	8.99	34.26	47.25	56.88	74.00	17.12	Peak
5448.950	34.60	9.05	34.22	49.44	58.87	74.00	15.13	Peak

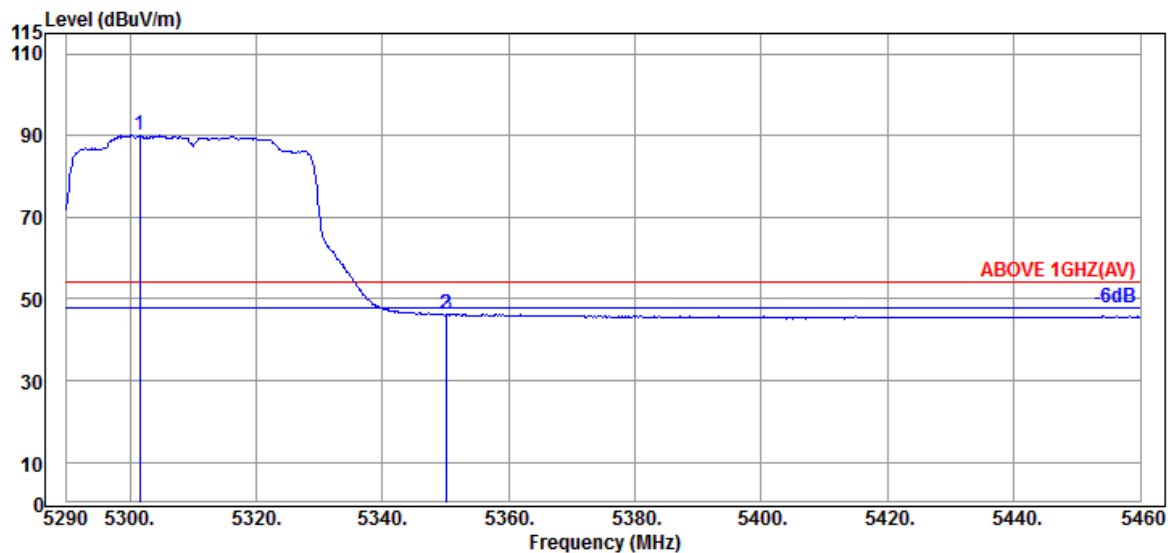

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.560	34.40	8.97	34.28	80.98	90.07	---	---	Average
5350.010	34.90	8.99	34.26	36.67	46.30	54.00	7.70	Average
5350.180	34.90	8.99	34.26	36.75	46.38	54.00	7.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

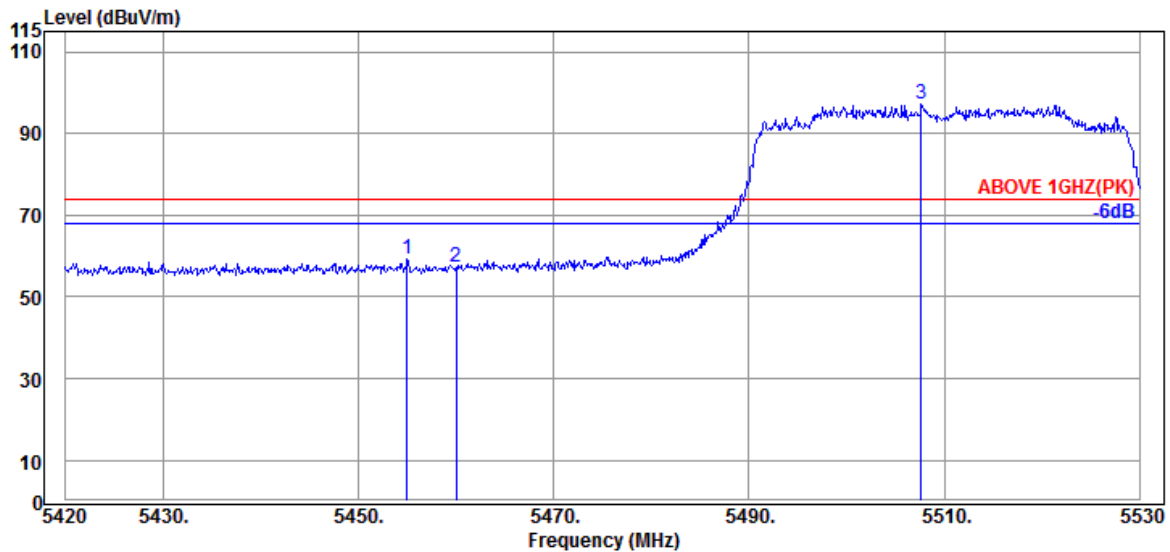

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.980	34.60	9.05	34.21	49.71	59.15	74.00	14.85	Peak
5460.040	34.60	9.05	34.21	47.67	57.11	74.00	16.89	Peak
@ 5507.670	34.70	9.08	34.21	87.71	97.28	---	---	Peak

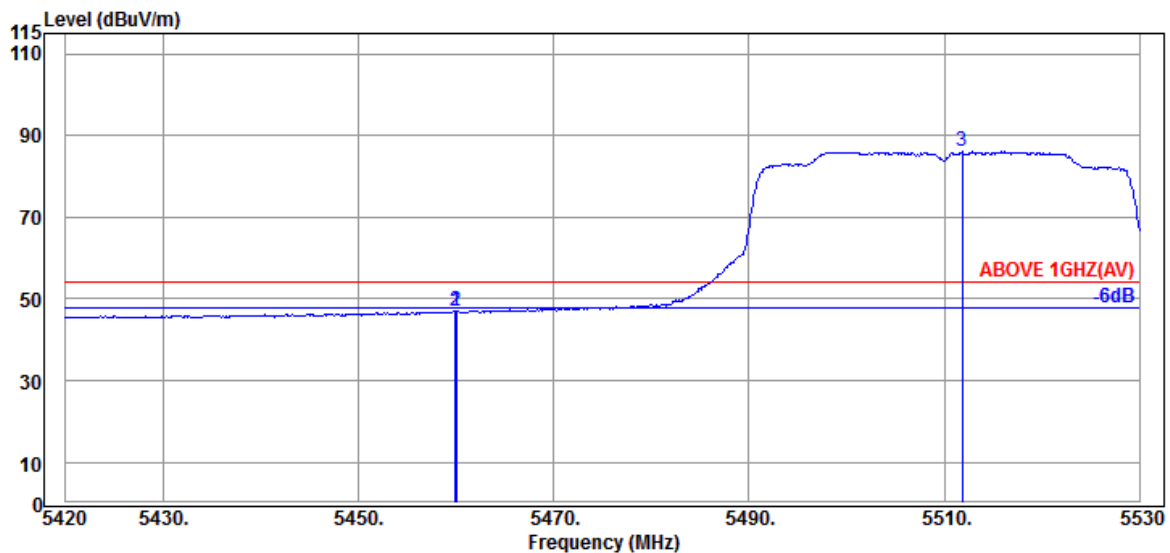

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.930	34.60	9.05	34.21	37.43	46.87	54.00	7.13	Average
5460.040	34.60	9.05	34.21	37.67	47.11	54.00	6.89	Average
@ 5511.850	34.70	9.09	34.21	76.48	86.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

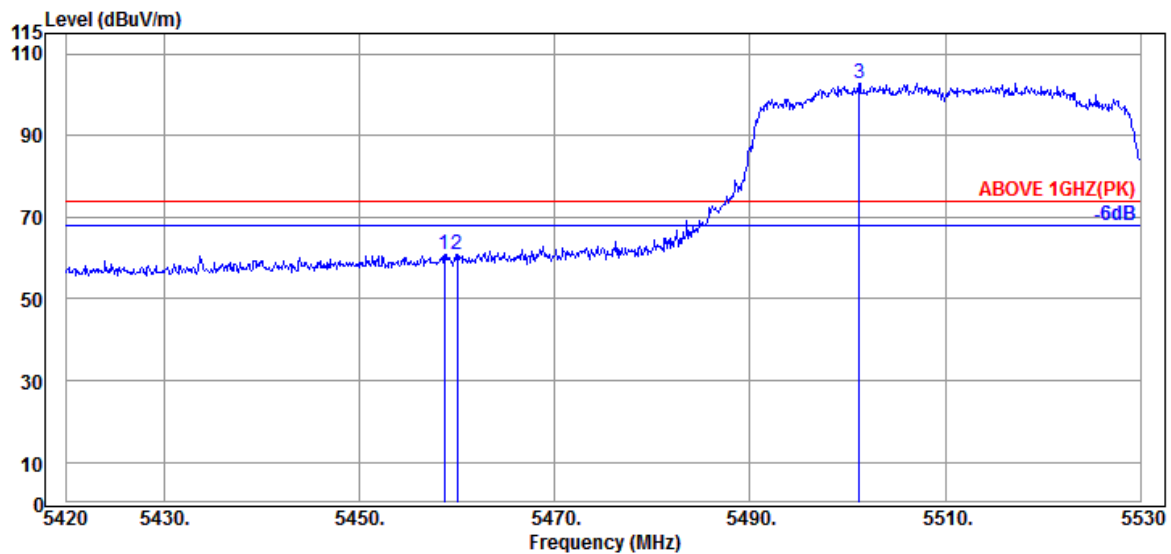

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.720	34.60	9.05	34.21	51.31	60.75	74.00	13.25	Peak
5460.040	34.60	9.05	34.21	51.42	60.86	74.00	13.14	Peak
@ 5501.180	34.70	9.08	34.20	93.34	102.92	---	---	Peak

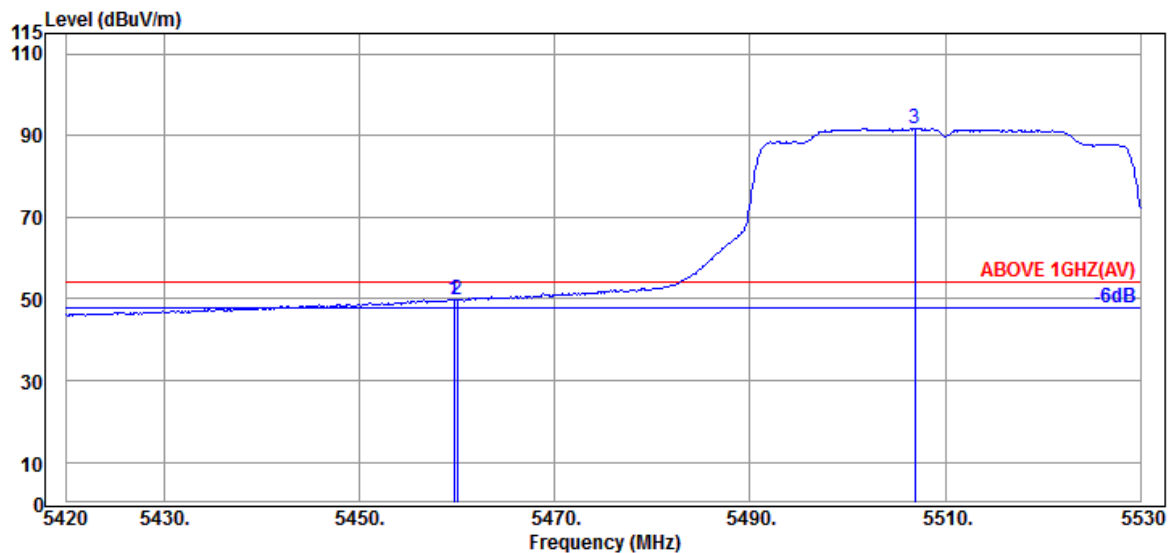

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.710	34.60	9.05	34.21	40.43	49.87	54.00	4.13	Average
5460.040	34.60	9.05	34.21	40.17	49.61	54.00	4.39	Average
@ 5506.900	34.70	9.08	34.21	82.28	91.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

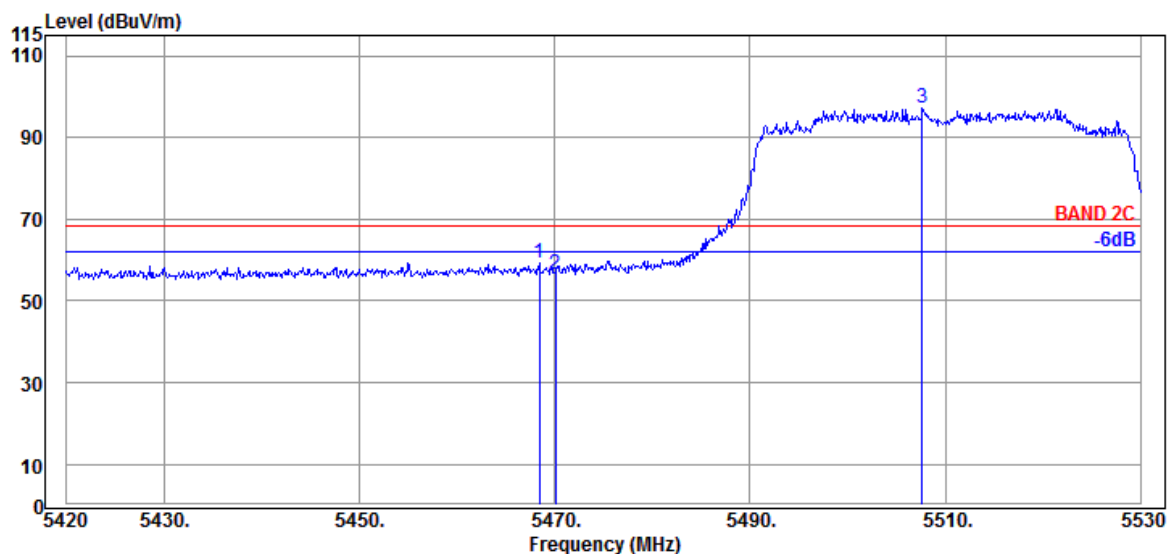

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.400	34.63	9.06	34.21	49.83	59.31	68.20	8.89	Peak
5470.050	34.63	9.06	34.21	47.16	56.64	68.20	11.56	Peak
5507.670	34.70	9.08	34.21	87.71	97.28	---	---	Peak

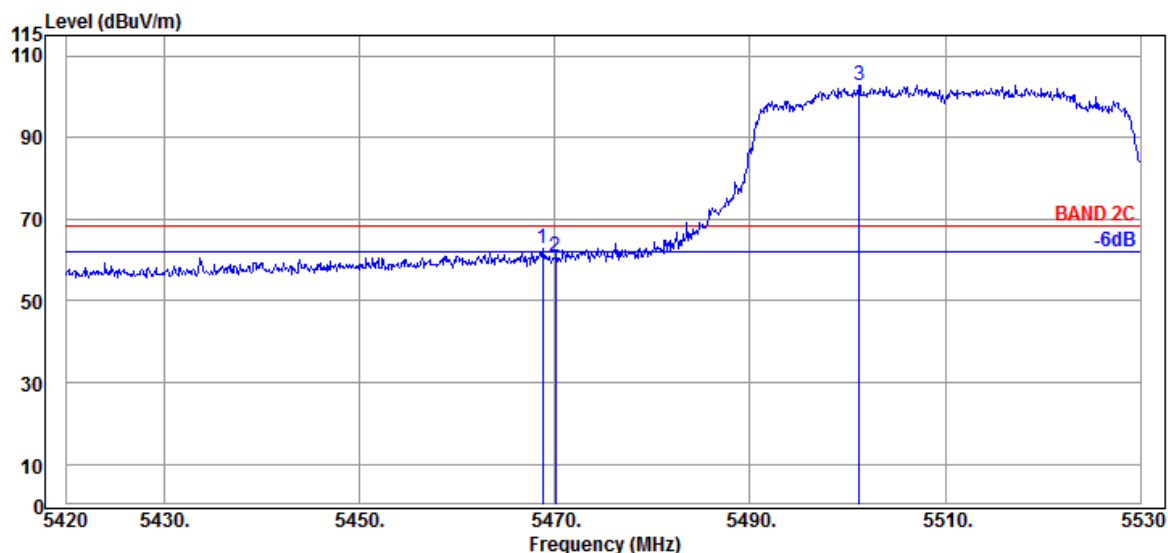

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.730	34.63	9.06	34.21	53.42	62.90	68.20	5.30	Peak
5470.050	34.63	9.06	34.21	51.57	61.05	68.20	7.15	Peak
5501.180	34.70	9.08	34.20	93.34	102.92	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

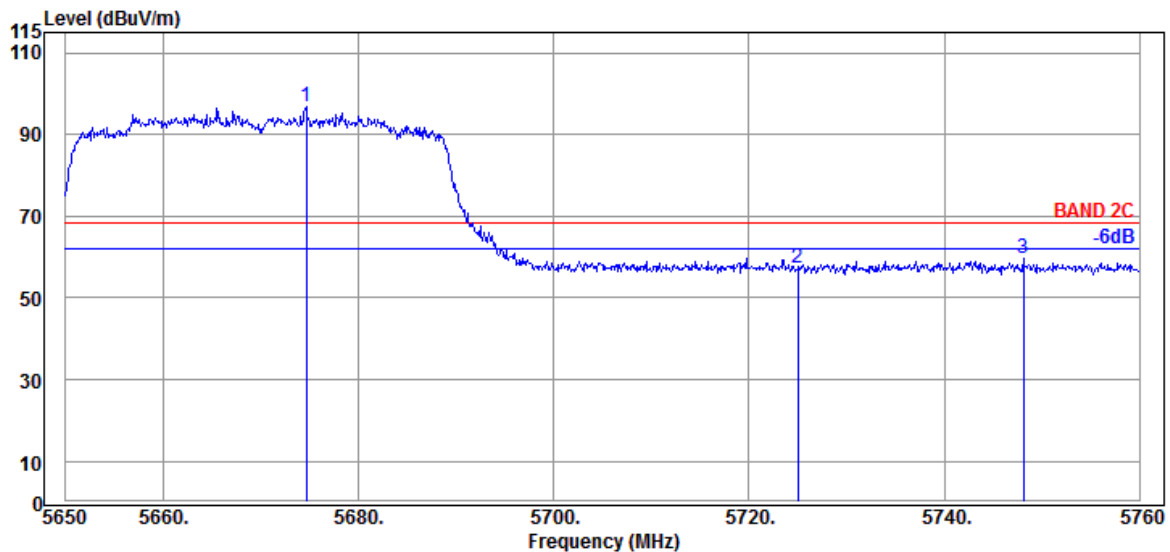

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.640	34.63	9.17	34.29	87.17	96.68	---	---	Peak
5725.020	34.90	9.20	34.30	47.65	57.45	68.20	10.75	Peak
5748.120	35.00	9.20	34.32	49.75	59.63	68.20	8.57	Peak

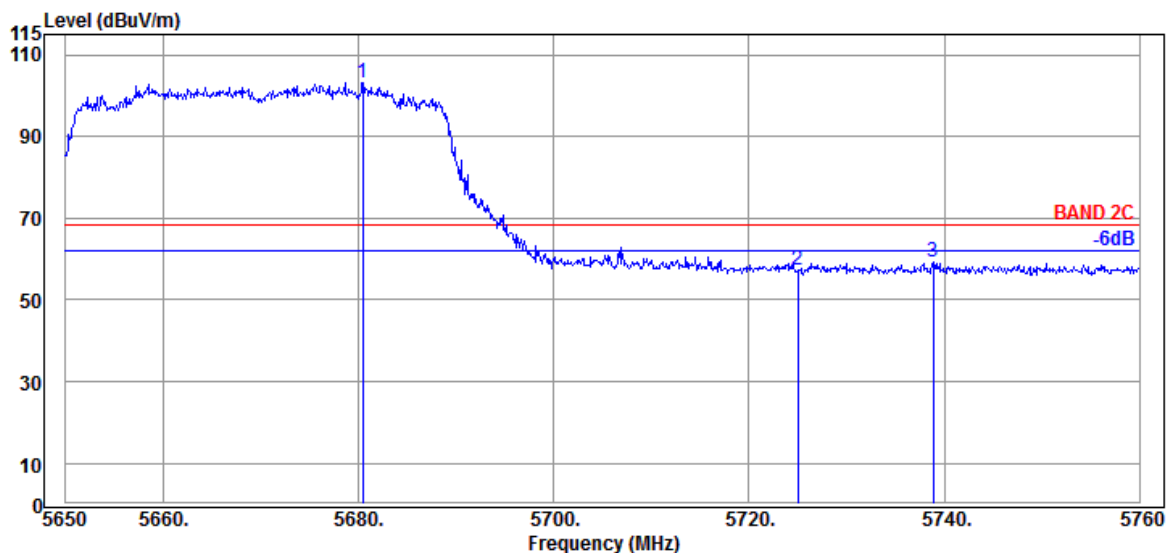

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.470	34.63	9.17	34.29	93.79	103.30	---	---	Peak
5725.020	34.90	9.20	34.30	47.38	57.18	68.20	11.02	Peak
5738.880	35.00	9.20	34.31	49.21	59.10	68.20	9.10	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

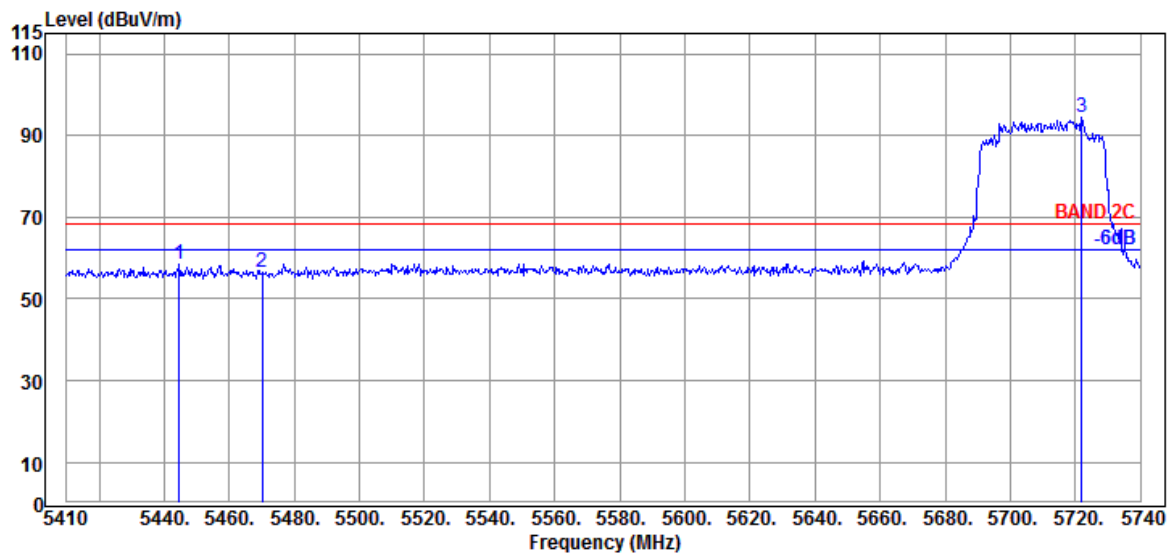

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5444.650	34.65	9.04	34.22	48.96	58.43	68.20	9.77	Peak
	5470.060	34.63	9.06	34.21	47.19	56.67	68.20	11.53	Peak
	5721.850	34.80	9.19	34.30	84.85	94.54	---	---	Peak

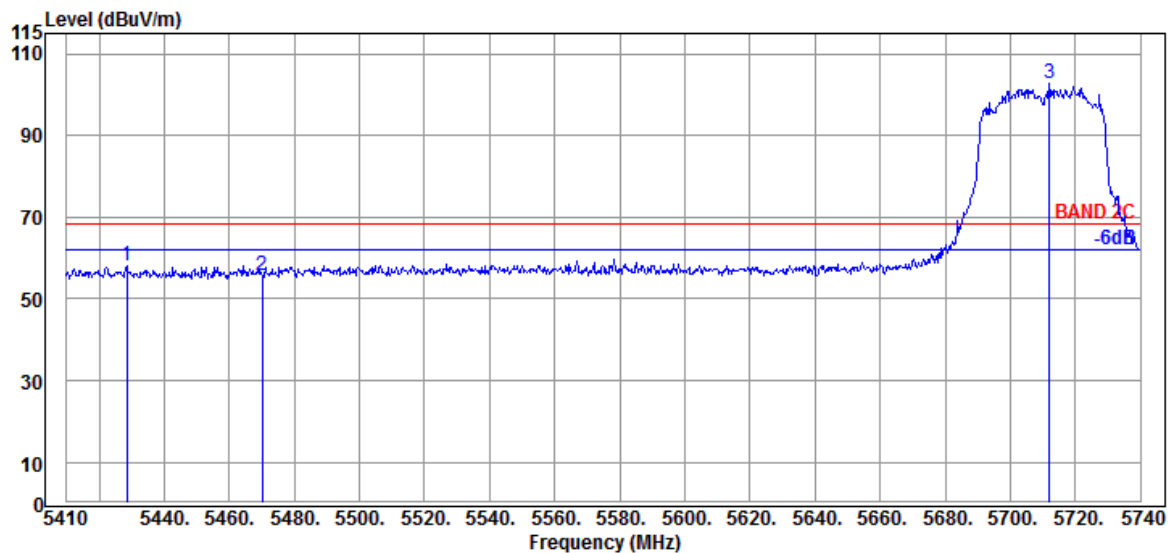

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5428.480	34.70	9.04	34.23	48.61	58.12	68.20	10.08	Peak
	5470.060	34.63	9.06	34.21	46.34	55.82	68.20	12.38	Peak
	5711.950	34.80	9.19	34.30	93.14	102.83	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

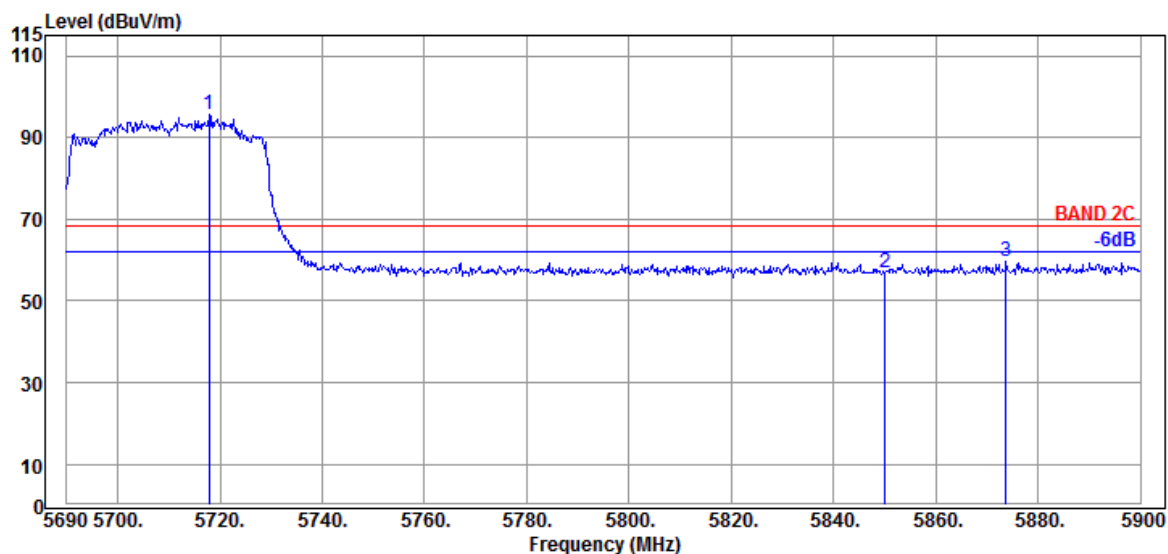

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.930	34.80	9.19	34.30	85.76	95.45	---	---	Peak
5850.020	35.40	9.25	34.36	46.65	56.94	68.20	11.26	Peak
5873.750	35.67	9.27	34.37	49.09	59.66	68.20	8.54	Peak

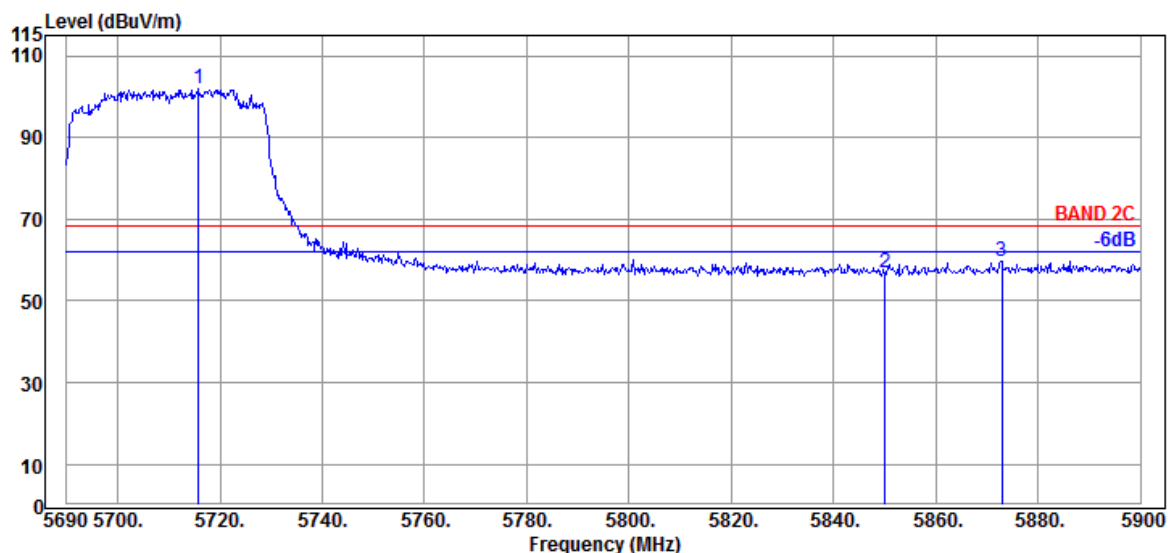

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.830	34.80	9.19	34.30	92.11	101.80	---	---	Peak
5850.020	35.40	9.25	34.36	46.64	56.93	68.20	11.27	Peak
5872.910	35.53	9.26	34.37	49.32	59.74	68.20	8.46	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

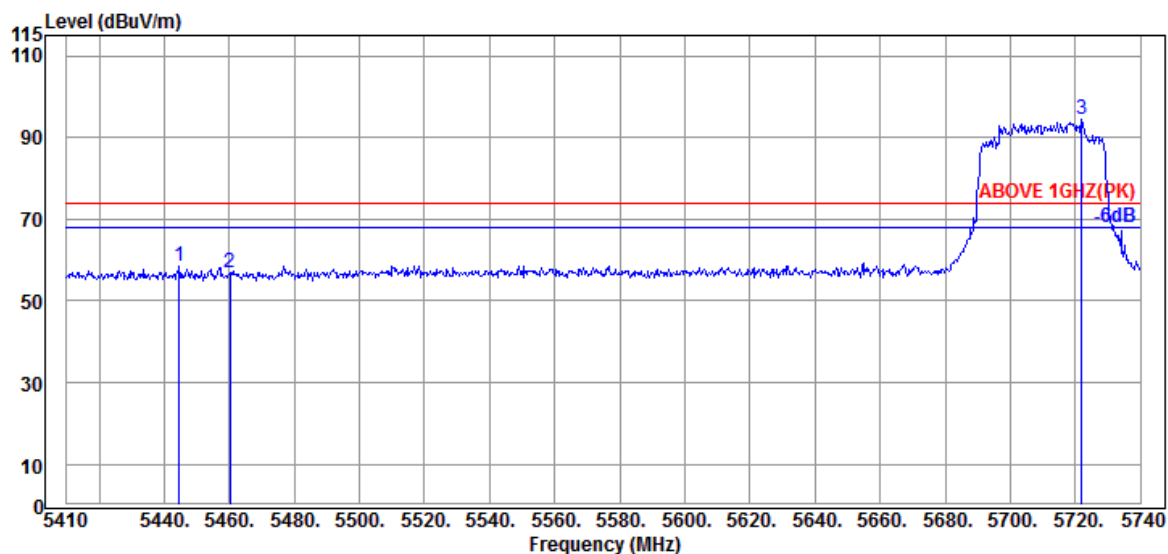

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.650	34.65	9.04	34.22	48.96	58.43	74.00	15.57	Peak
5460.160	34.60	9.05	34.21	47.43	56.87	74.00	17.13	Peak
@ 5721.850	34.80	9.19	34.30	84.85	94.54	---	---	Peak

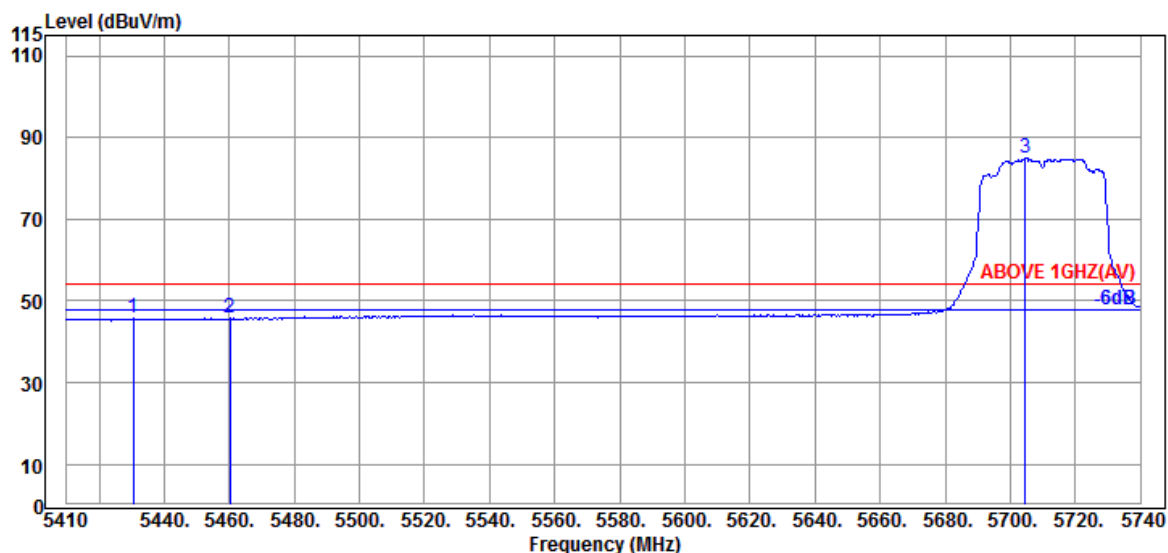

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.460	34.70	9.04	34.23	36.23	45.74	54.00	8.26	Average
5460.160	34.60	9.05	34.21	36.21	45.65	54.00	8.35	Average
@ 5704.690	34.70	9.18	34.29	75.28	84.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

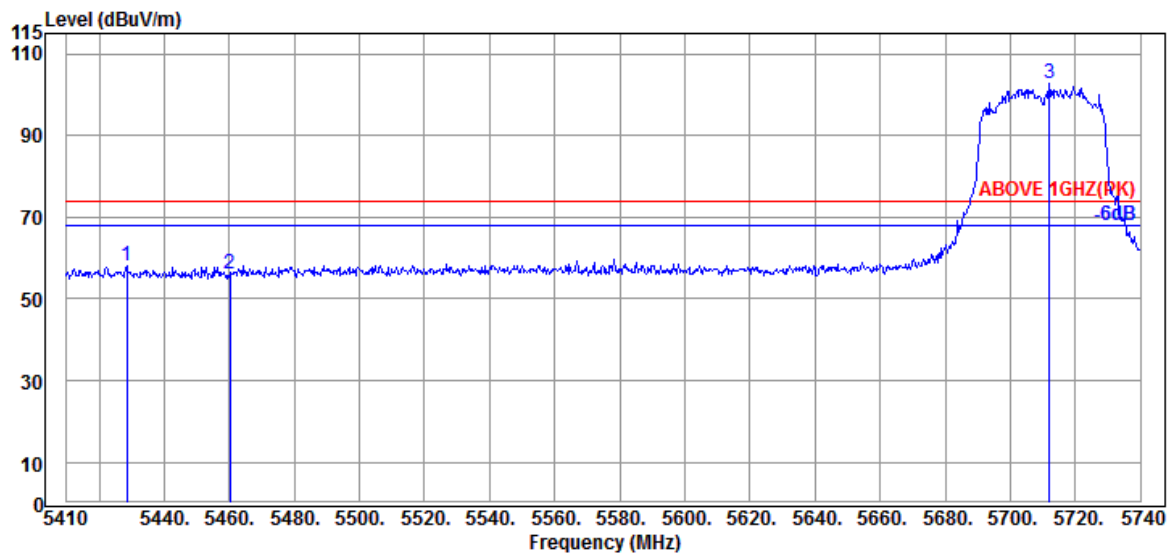

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.480	34.70	9.04	34.23	48.61	58.12	74.00	15.88	Peak
5460.160	34.60	9.05	34.21	46.68	56.12	74.00	17.88	Peak
@ 5711.950	34.80	9.19	34.30	93.14	102.83	---	---	Peak

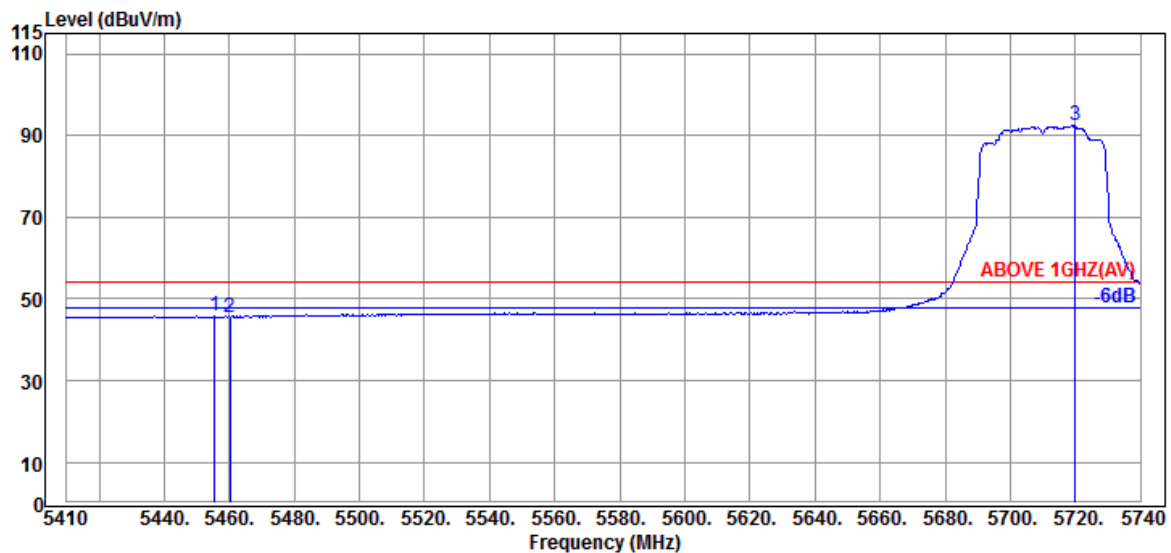

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.540	34.60	9.05	34.21	36.34	45.78	54.00	8.22	Average
5460.160	34.60	9.05	34.21	36.14	45.58	54.00	8.42	Average
@ 5719.870	34.80	9.19	34.30	82.66	92.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

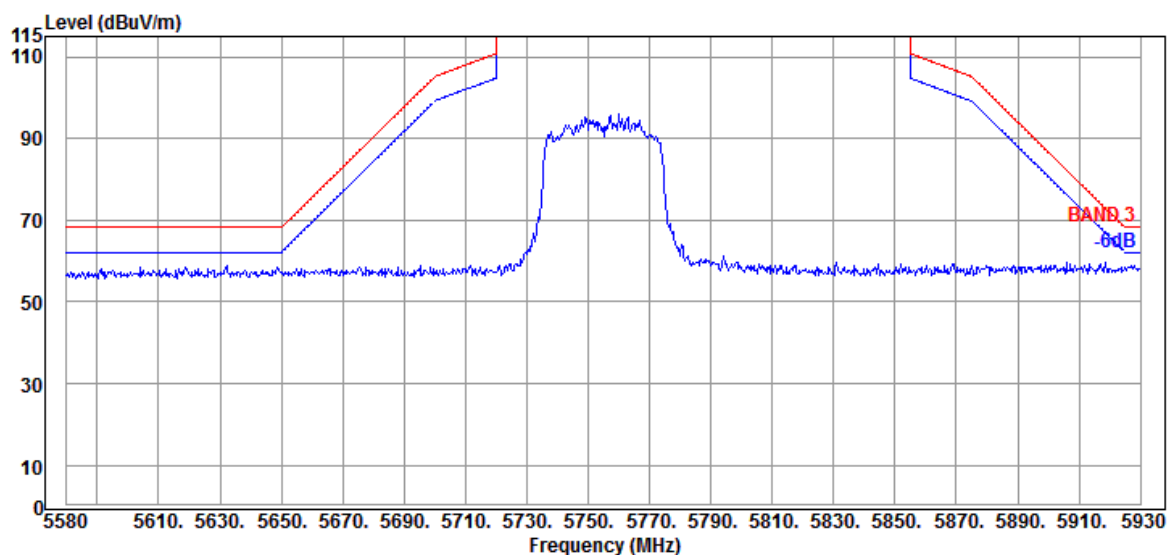

Antenna at Vertical Polarization

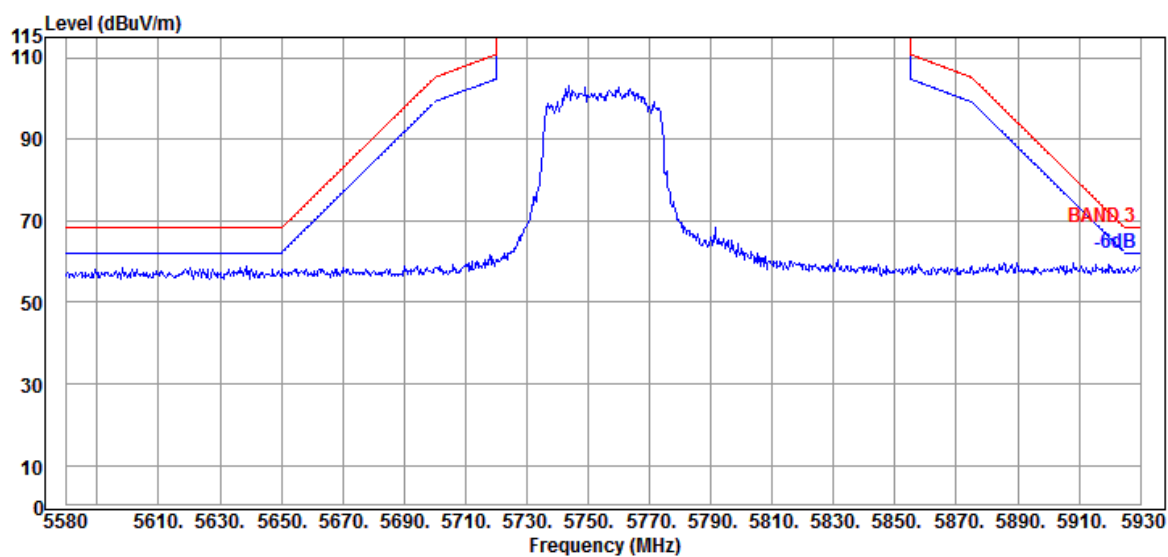


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

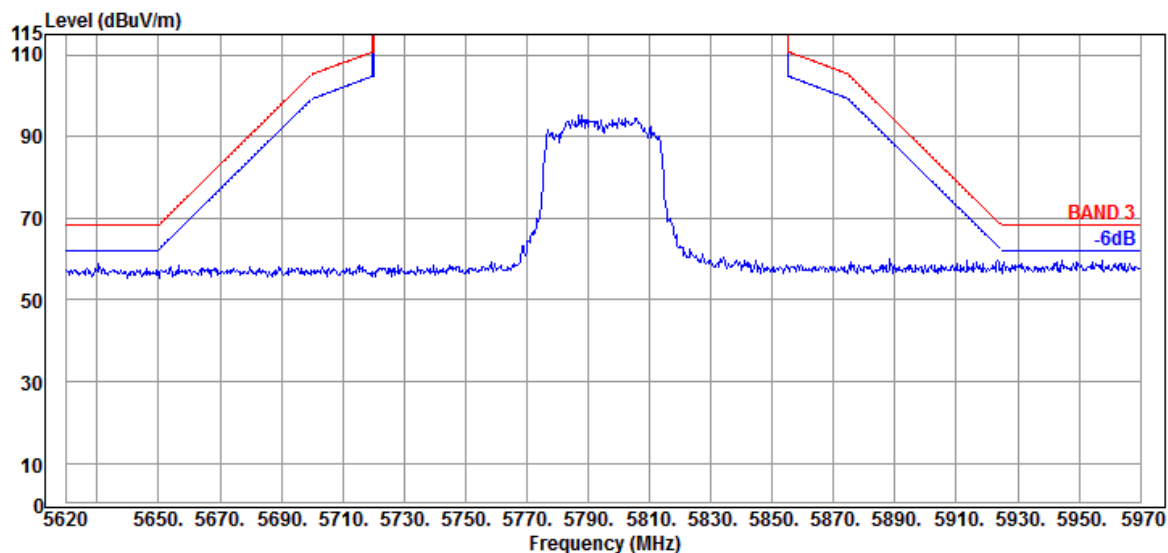

Antenna at Vertical Polarization

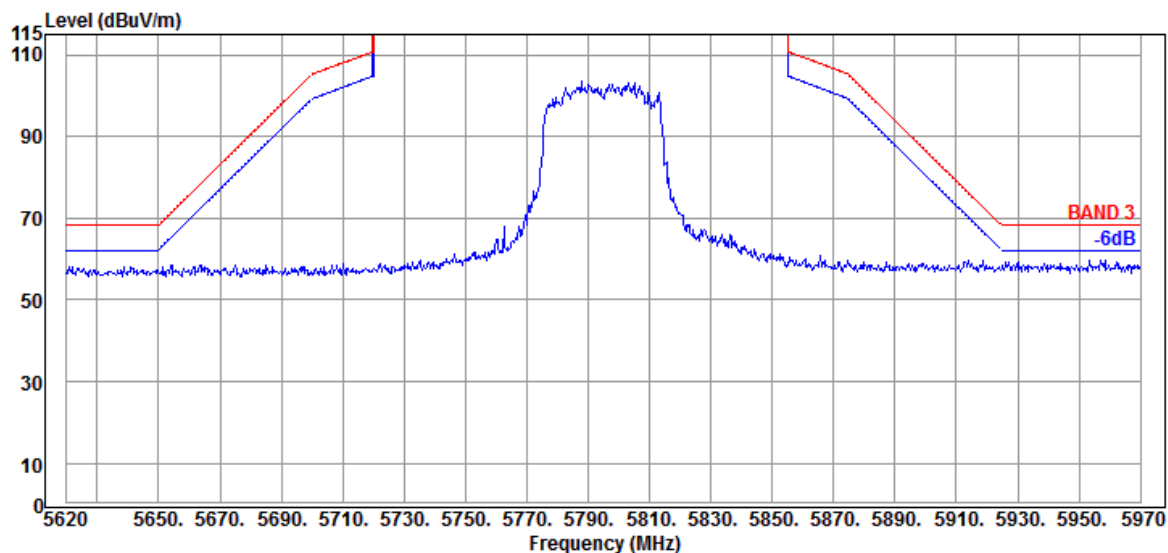

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

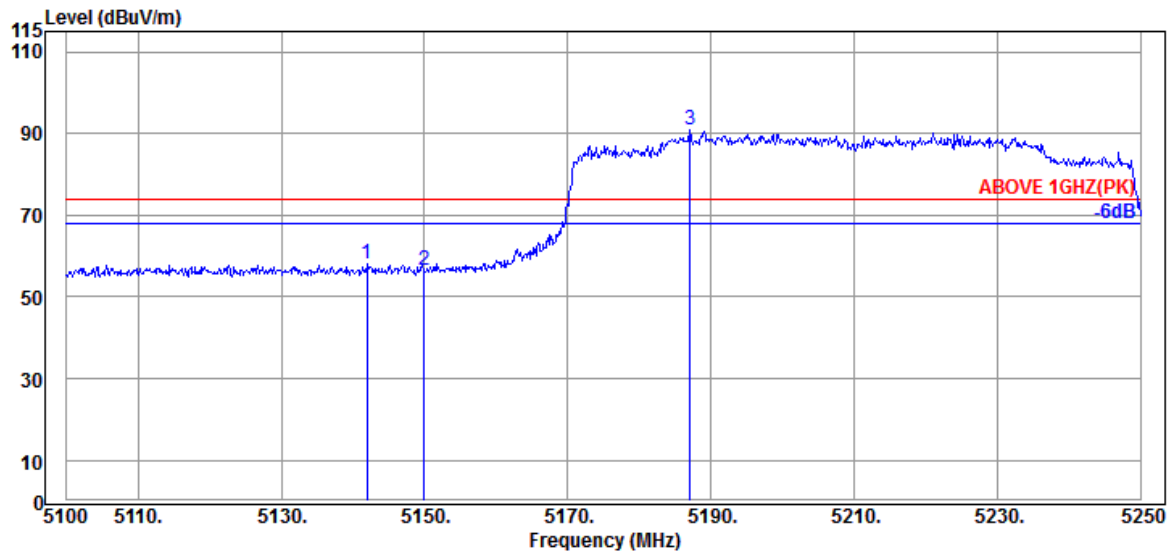

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.000	34.50	8.88	34.34	49.03	58.07	74.00	15.93	Peak
5149.950	34.50	8.88	34.34	47.34	56.38	74.00	17.62	Peak
@ 5187.150	34.70	8.91	34.32	81.77	91.06	---	---	Peak

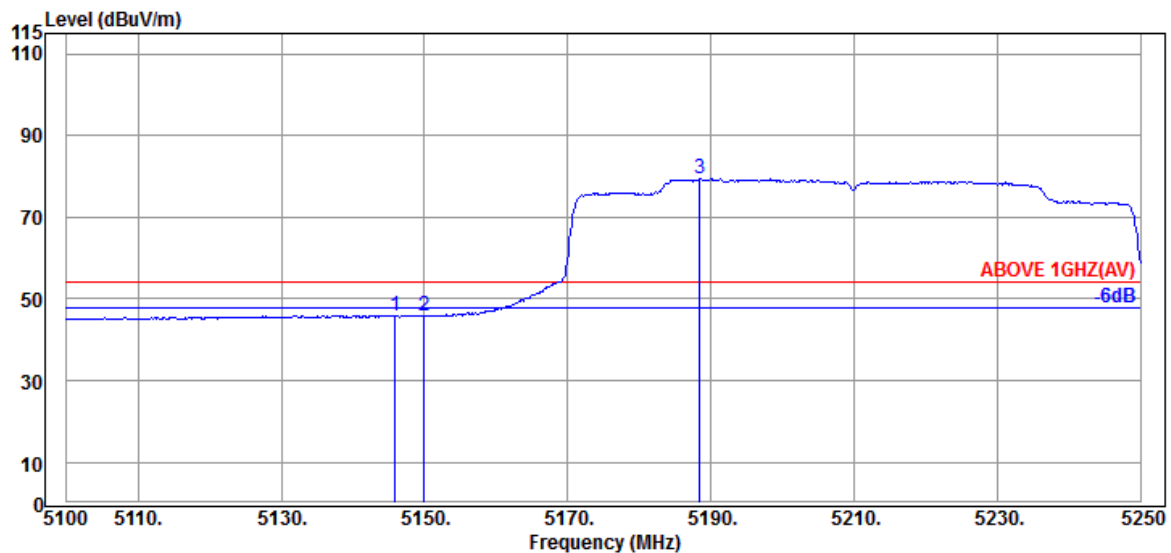

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.900	34.50	8.88	34.34	36.96	46.00	54.00	8.00	Average
5149.950	34.50	8.88	34.34	36.87	45.91	54.00	8.09	Average
@ 5188.500	34.70	8.91	34.32	70.19	79.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

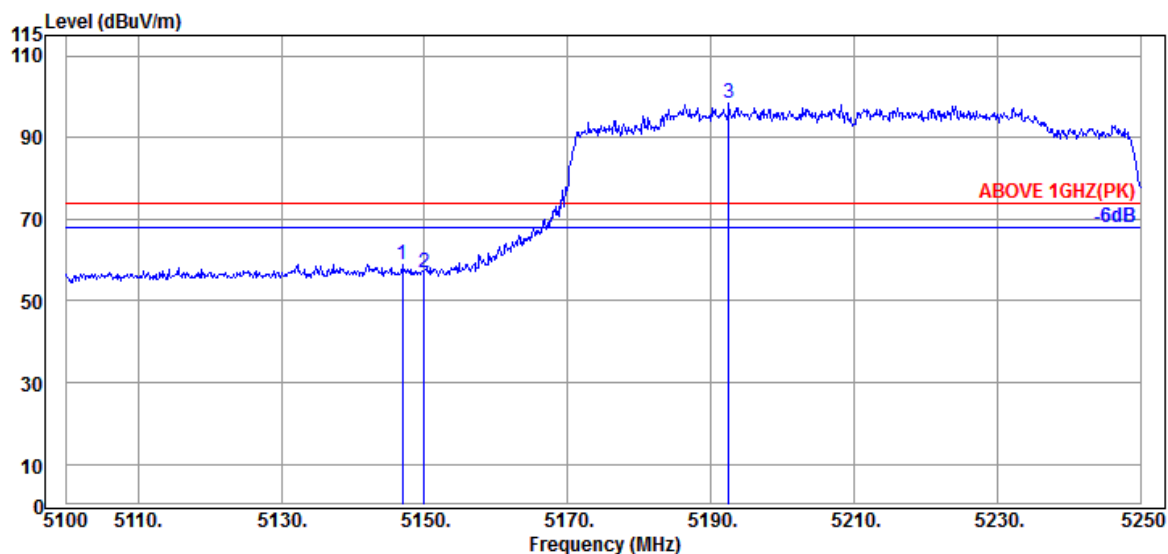

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.950	34.50	8.88	34.34	49.80	58.84	74.00	15.16	Peak
5149.950	34.50	8.88	34.34	47.83	56.87	74.00	17.13	Peak
@ 5192.550	34.70	8.91	34.32	88.98	98.27	---	---	Peak

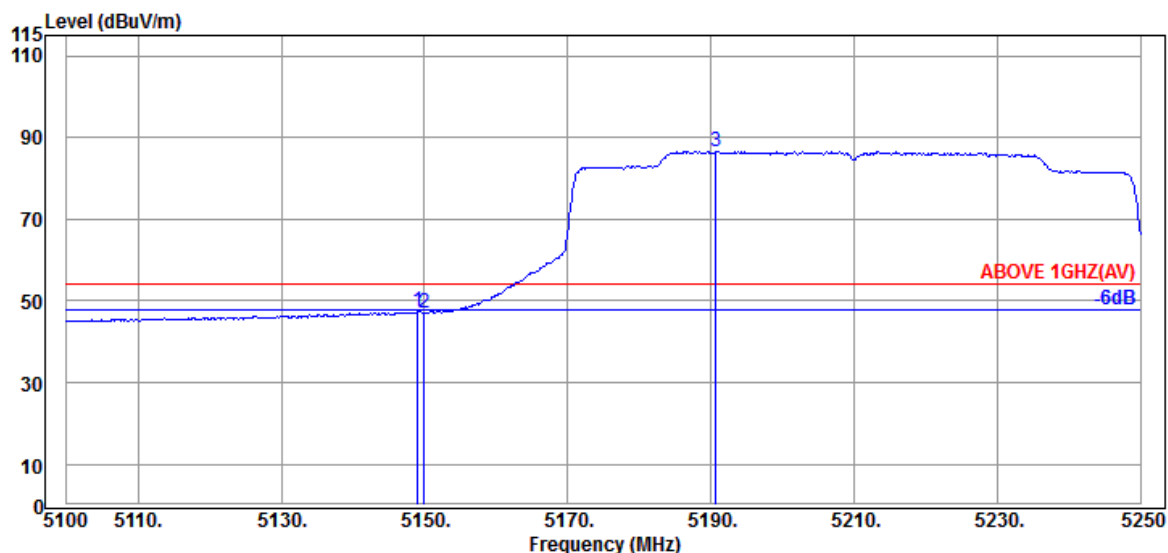

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	34.50	8.88	34.34	38.35	47.39	54.00	6.61	Average
5149.950	34.50	8.88	34.34	38.09	47.13	54.00	6.87	Average
@ 5190.750	34.70	8.91	34.32	77.27	86.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

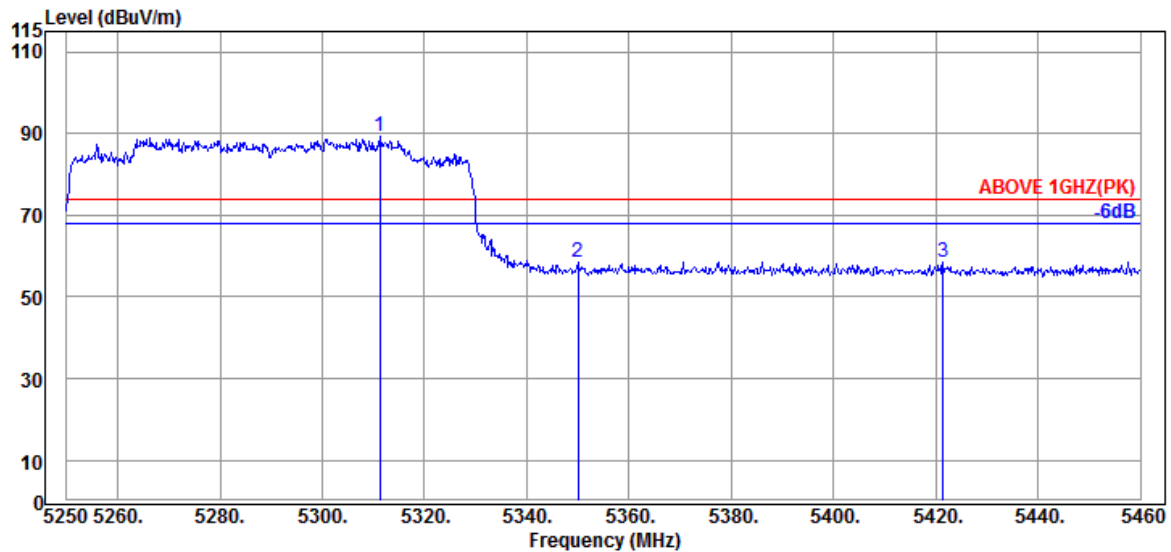

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.320	34.57	8.98	34.27	79.86	89.14	---	---	Peak
5349.960	34.90	8.99	34.26	48.88	58.51	74.00	15.49	Peak
5421.360	34.70	9.04	34.23	49.03	58.54	74.00	15.46	Peak

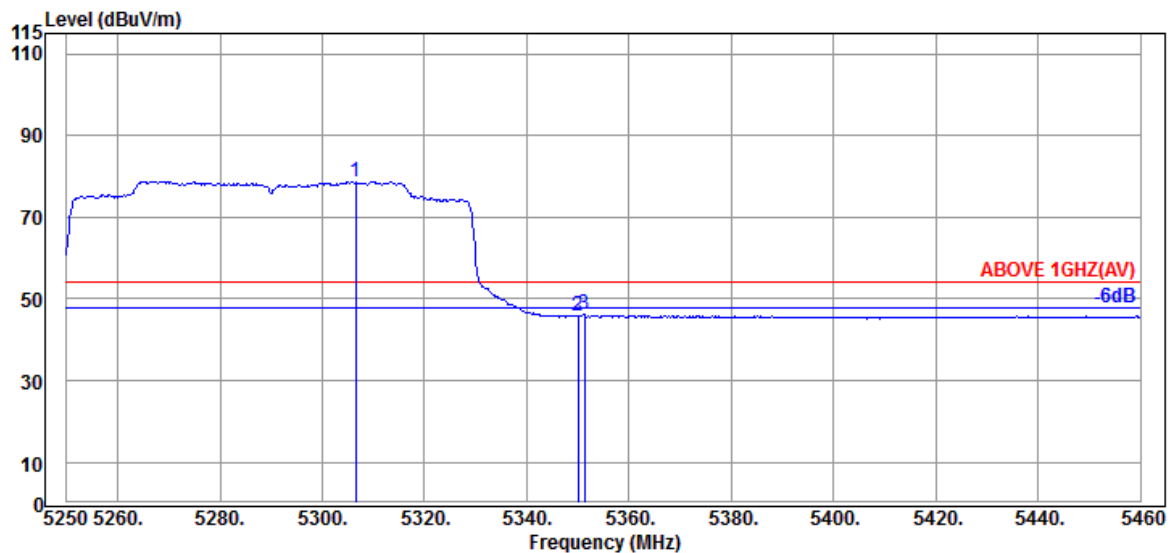

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.490	34.40	8.97	34.28	69.63	78.72	---	---	Average
5349.960	34.90	8.99	34.26	36.07	45.70	54.00	8.30	Average
5351.220	34.90	8.99	34.26	36.45	46.08	54.00	7.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

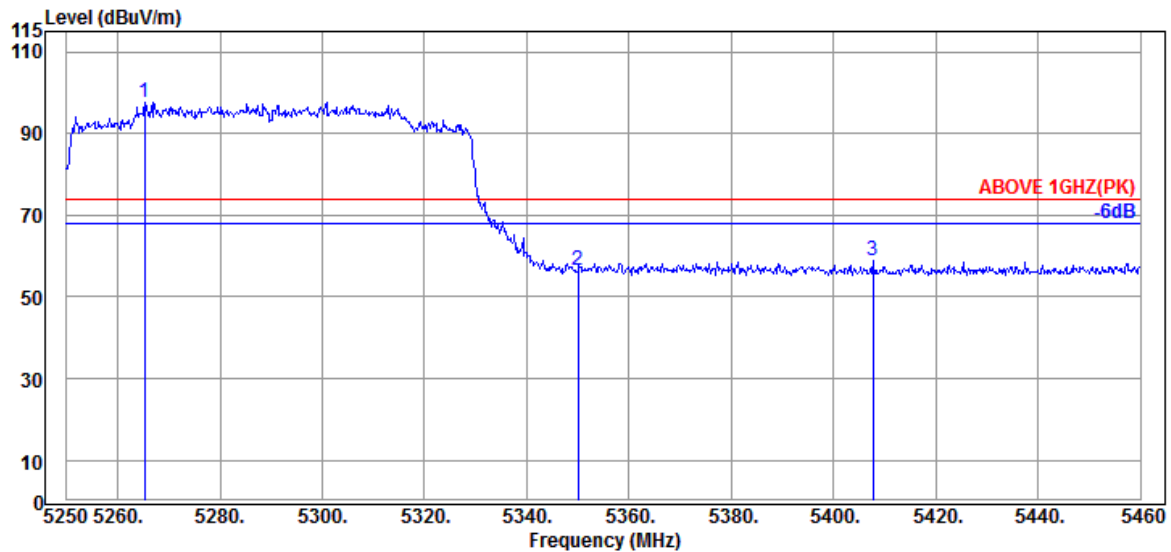

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.330	34.47	8.95	34.29	88.66	97.79	---	---	Peak
5349.960	34.90	8.99	34.26	46.70	56.33	74.00	17.67	Peak
5407.710	34.75	9.03	34.23	49.30	58.85	74.00	15.15	Peak

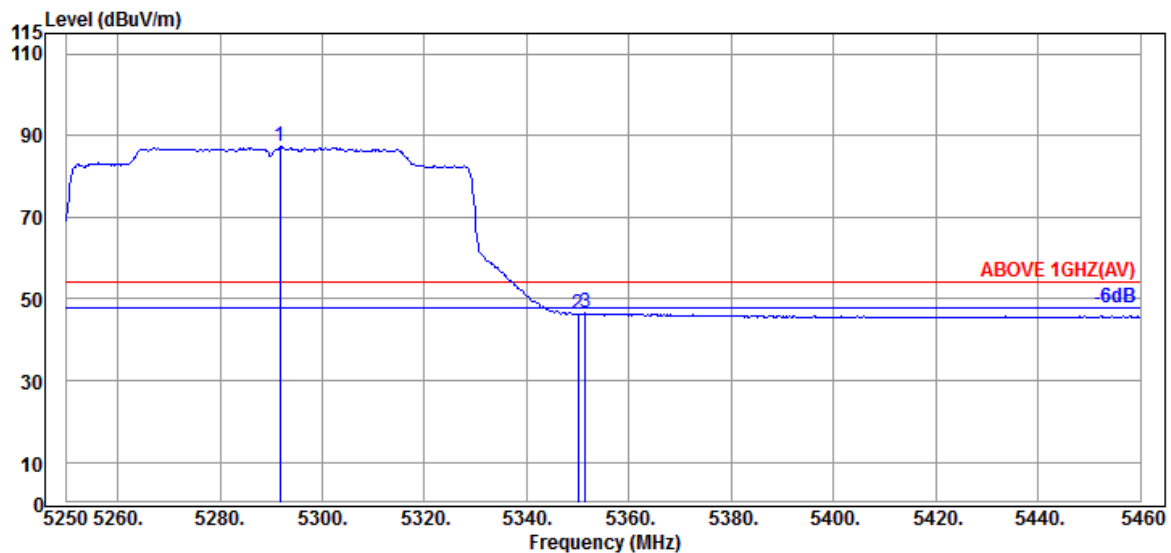

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.790	34.43	8.96	34.28	78.15	87.26	---	---	Average
5349.960	34.90	8.99	34.26	36.58	46.21	54.00	7.79	Average
5351.430	34.90	8.99	34.26	36.84	46.47	54.00	7.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

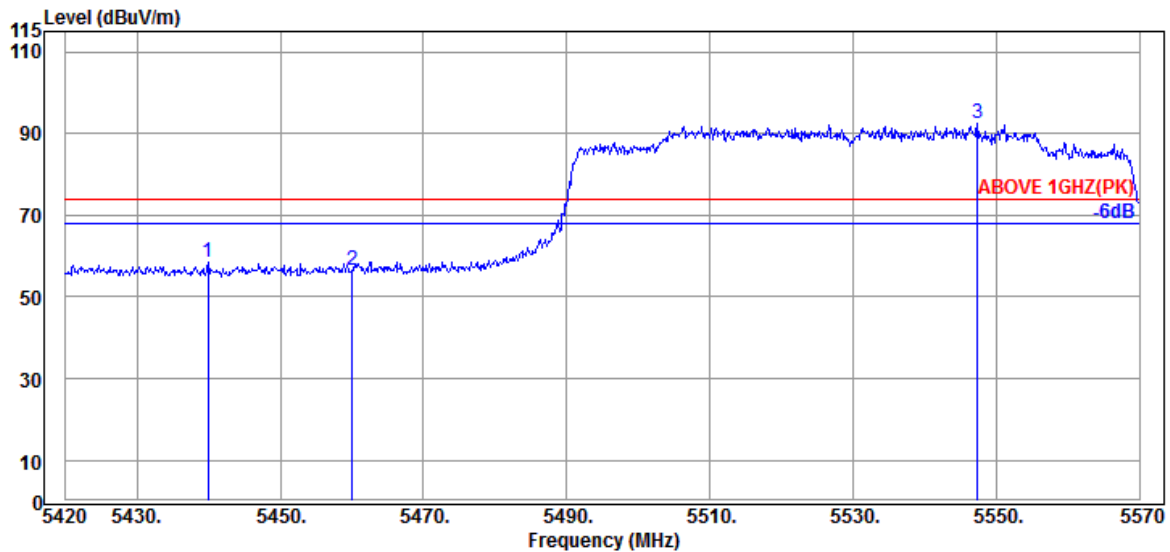

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.950	34.65	9.04	34.22	48.93	58.40	74.00	15.60	Peak
5460.050	34.60	9.05	34.21	46.88	56.32	74.00	17.68	Peak
@ 5547.350	34.70	9.10	34.23	83.06	92.63	---	---	Peak

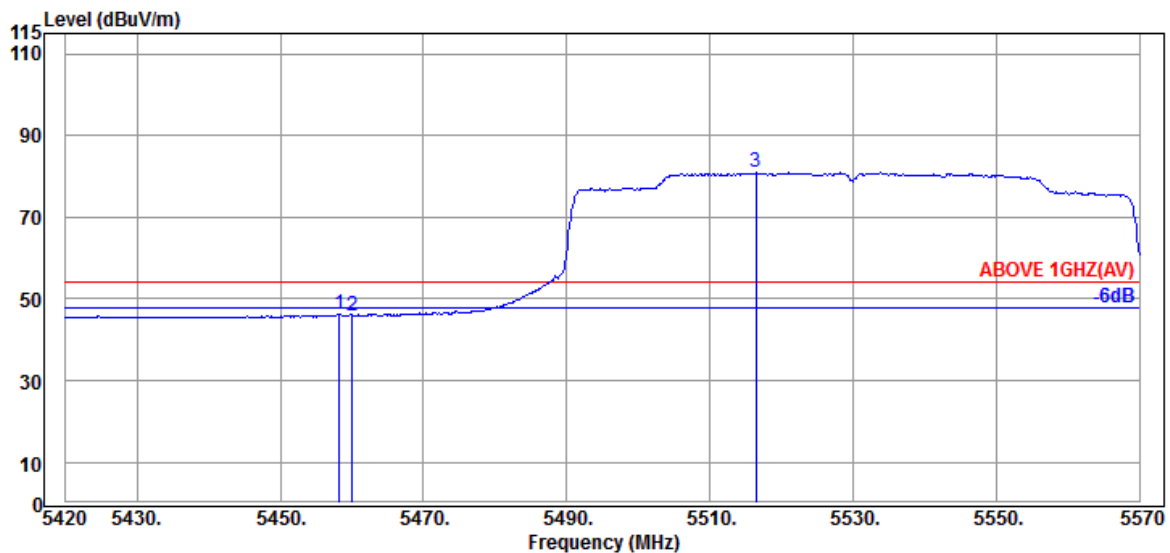

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.60	9.05	34.21	36.71	46.15	54.00	7.85	Average
5460.050	34.60	9.05	34.21	36.54	45.98	54.00	8.02	Average
@ 5516.450	34.70	9.09	34.21	71.39	80.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

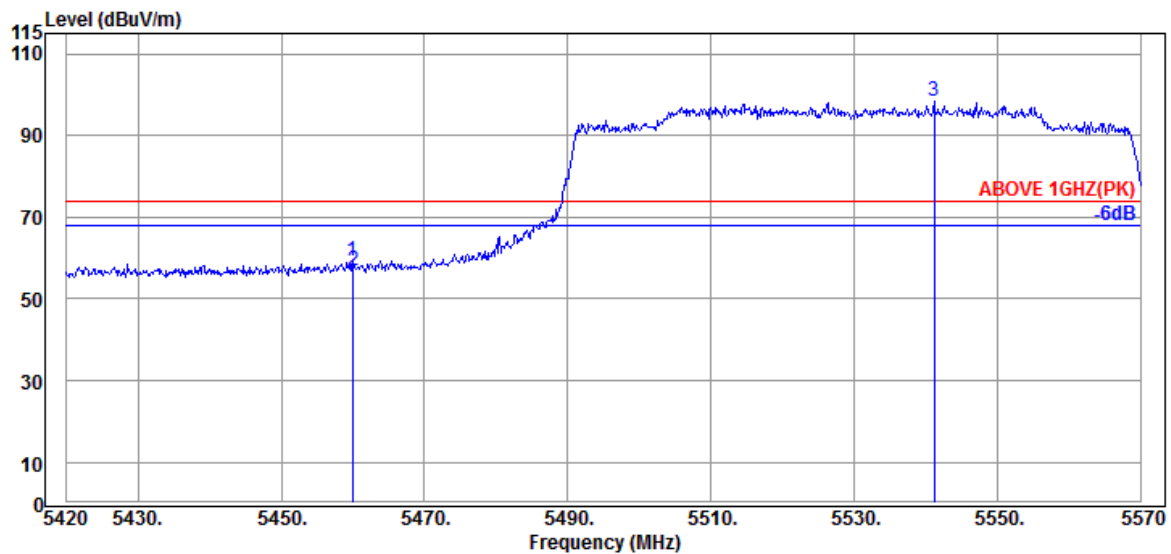

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.60	9.05	34.21	49.99	59.43	74.00	14.57	Peak
5460.050	34.60	9.05	34.21	47.38	56.82	74.00	17.18	Peak
@ 5541.200	34.70	9.09	34.22	88.80	98.37	---	---	Peak

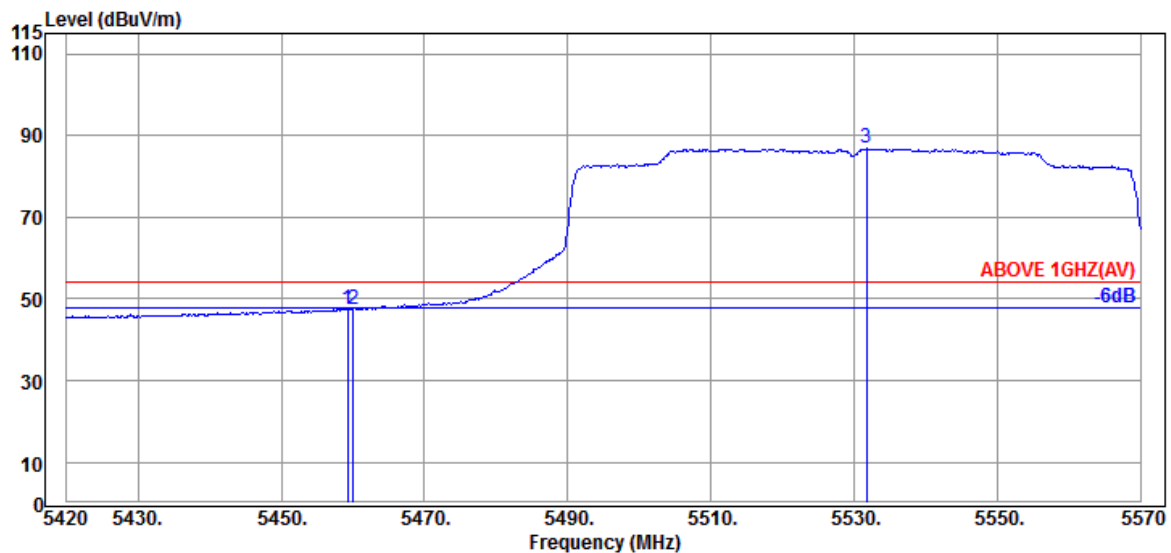

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.60	9.05	34.21	38.08	47.52	54.00	6.48	Average
5460.050	34.60	9.05	34.21	37.95	47.39	54.00	6.61	Average
@ 5531.750	34.70	9.09	34.22	77.24	86.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

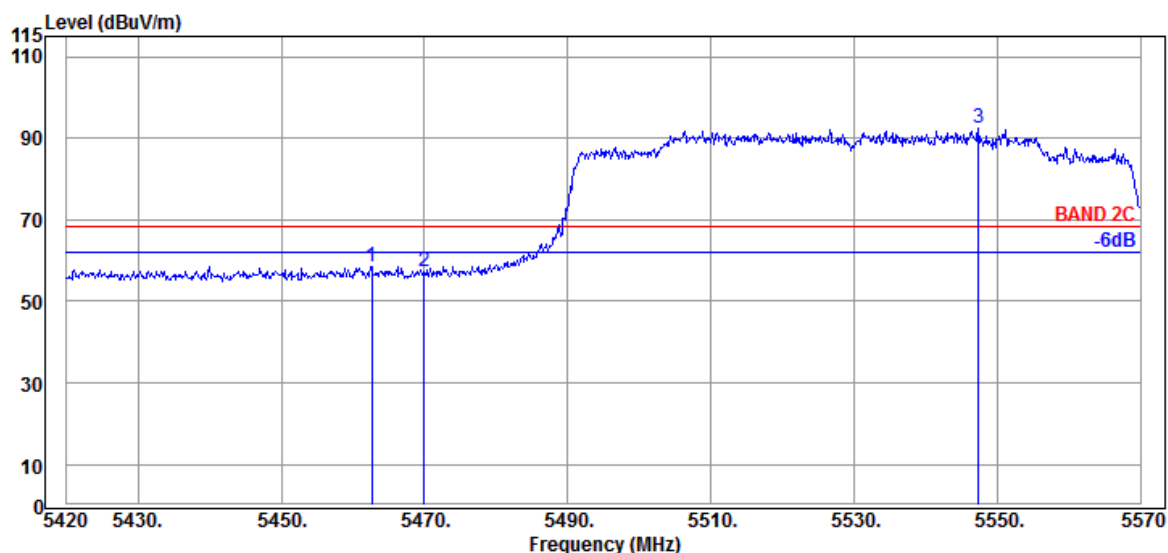

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5462.600	34.60	9.05	34.21	49.13	58.57	68.20	9.63	Peak
	5469.950	34.63	9.06	34.21	47.84	57.32	68.20	10.88	Peak
	5547.350	34.70	9.10	34.23	83.06	92.63	---	---	Peak

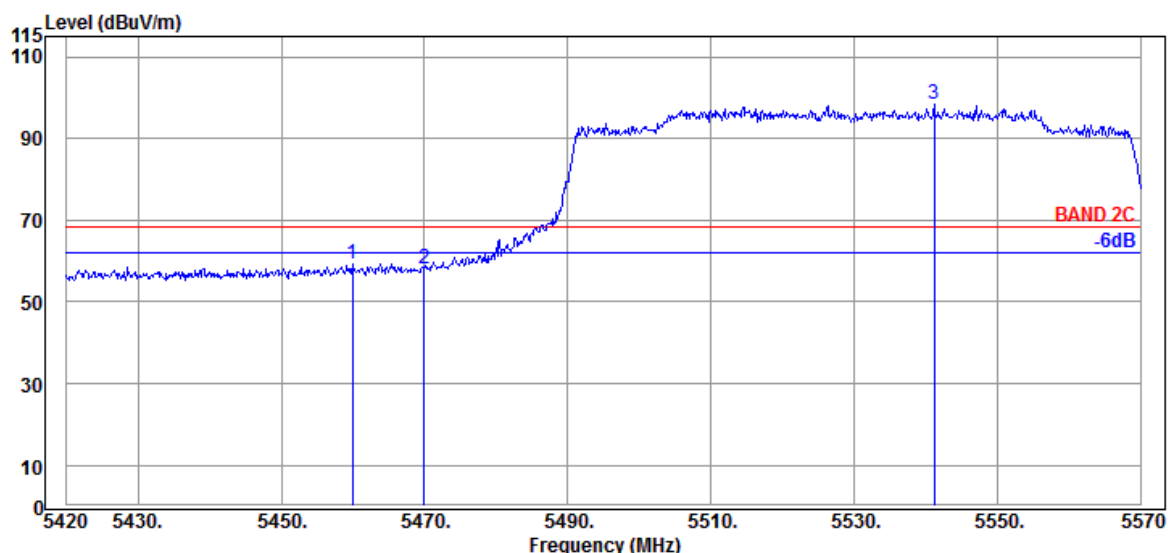

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5459.900	34.60	9.05	34.21	49.99	59.43	68.20	8.77	Peak
	5469.950	34.63	9.06	34.21	48.49	57.97	68.20	10.23	Peak
	5541.200	34.70	9.09	34.22	88.80	98.37	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

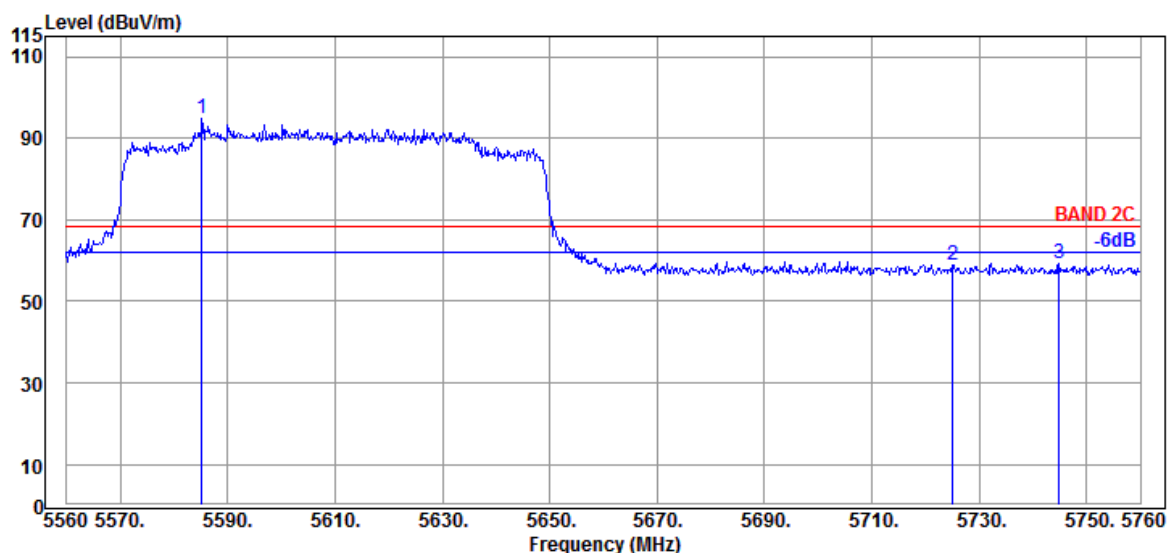

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5585.200	34.50	9.12	34.24	85.42	94.80	---	---	Peak
	5725.000	34.90	9.20	34.30	49.14	58.94	68.20	9.26	Peak
	5744.800	35.00	9.20	34.31	49.22	59.11	68.20	9.09	Peak

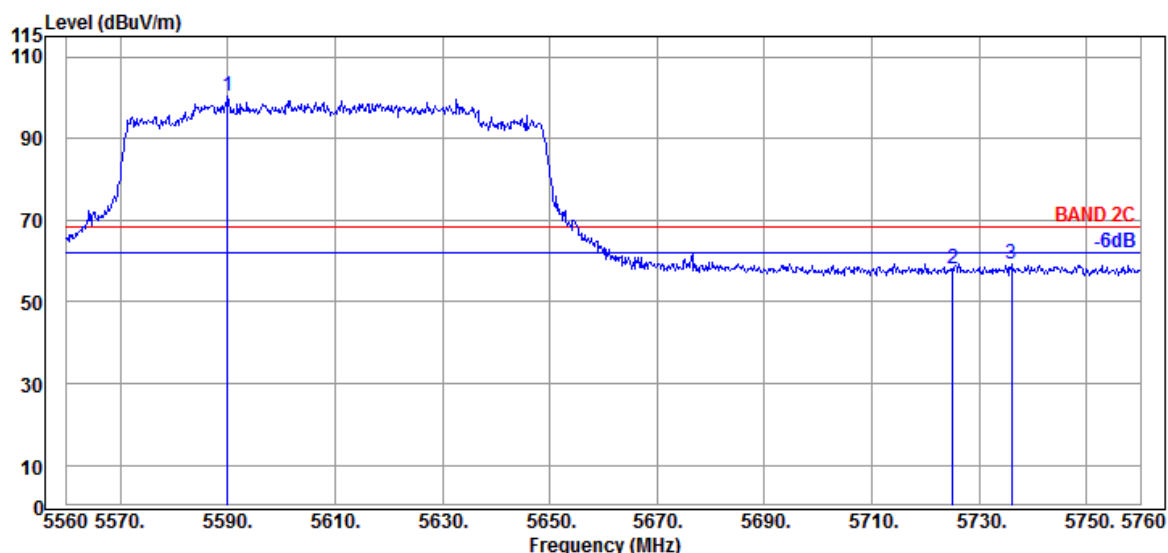

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5590.000	34.50	9.12	34.24	90.82	100.20	---	---	Peak
	5725.000	34.90	9.20	34.30	48.39	58.19	68.20	10.01	Peak
	5736.000	34.90	9.20	34.31	49.60	59.39	68.20	8.81	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

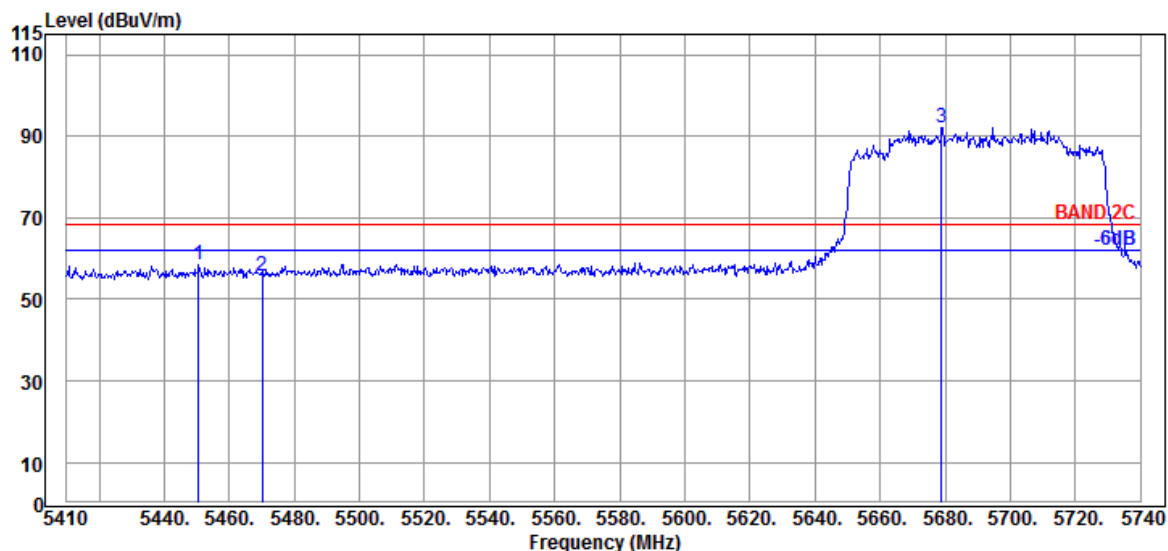

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5450.590	34.60	9.05	34.22	48.93	58.36	68.20	9.84	Peak
	5470.060	34.63	9.06	34.21	46.23	55.71	68.20	12.49	Peak
	5678.950	34.63	9.17	34.29	82.70	92.21	---	---	Peak

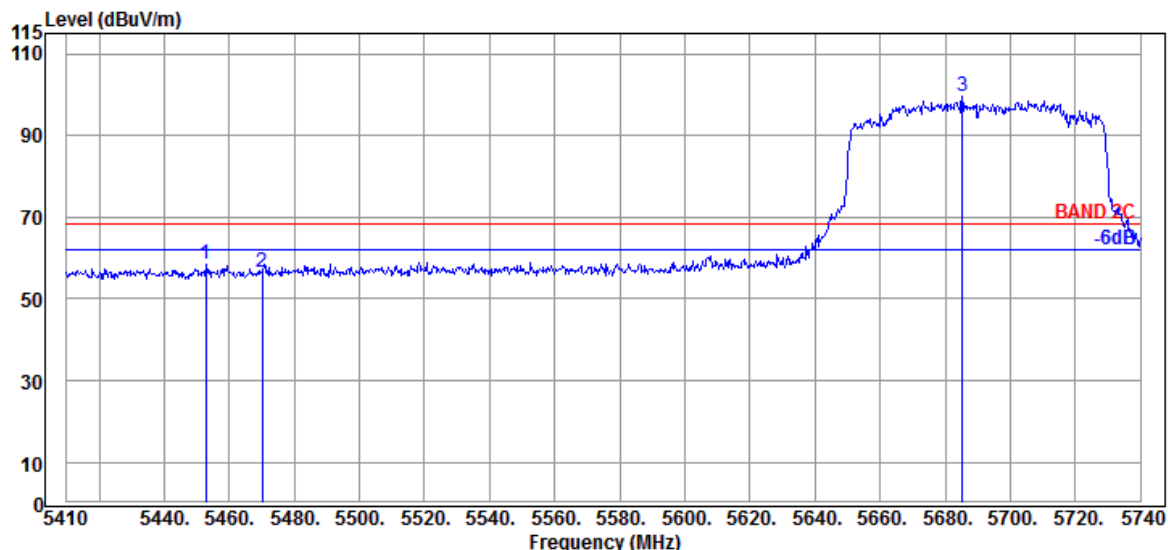

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5452.900	34.60	9.05	34.21	49.10	58.54	68.20	9.66	Peak
	5470.060	34.63	9.06	34.21	46.85	56.33	68.20	11.87	Peak
	5685.220	34.63	9.17	34.29	89.99	99.50	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

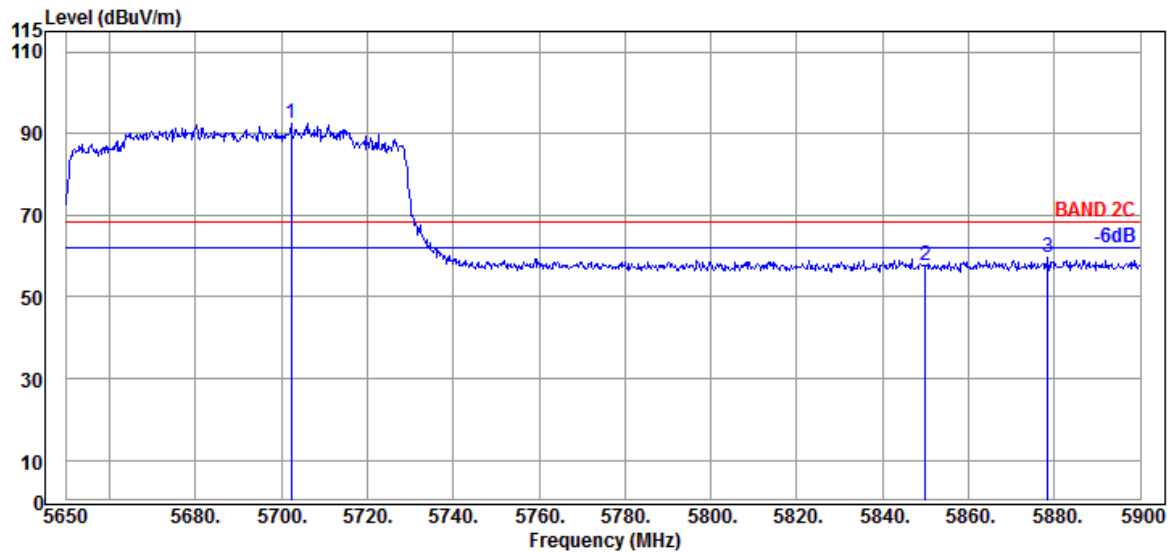

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.250	34.70	9.18	34.29	82.86	92.45	---	---	Peak
	5850.000	35.40	9.25	34.36	47.44	57.73	68.20	10.47	Peak
	5878.500	35.67	9.27	34.38	48.98	59.54	68.20	8.66	Peak

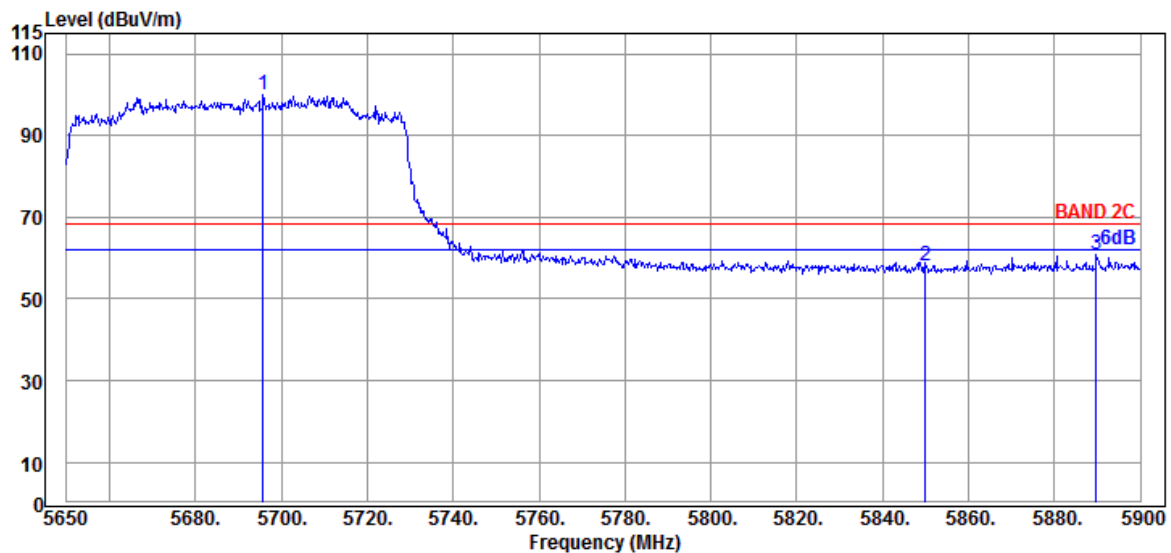

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5695.750	34.70	9.18	34.29	90.53	100.12	---	---	Peak
	5850.000	35.40	9.25	34.36	47.71	58.00	68.20	10.20	Peak
	5889.750	35.67	9.27	34.38	50.24	60.80	68.20	7.40	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

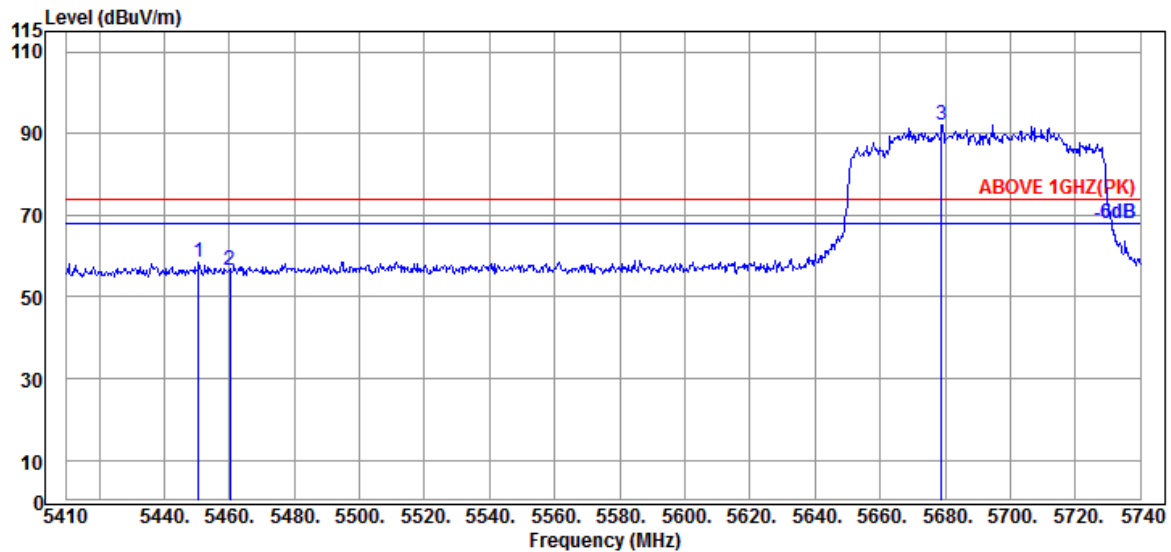

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.60	9.05	34.22	48.93	58.36	74.00	15.64	Peak
5460.160	34.60	9.05	34.21	47.21	56.65	74.00	17.35	Peak
@ 5678.950	34.63	9.17	34.29	82.70	92.21	---	---	Peak

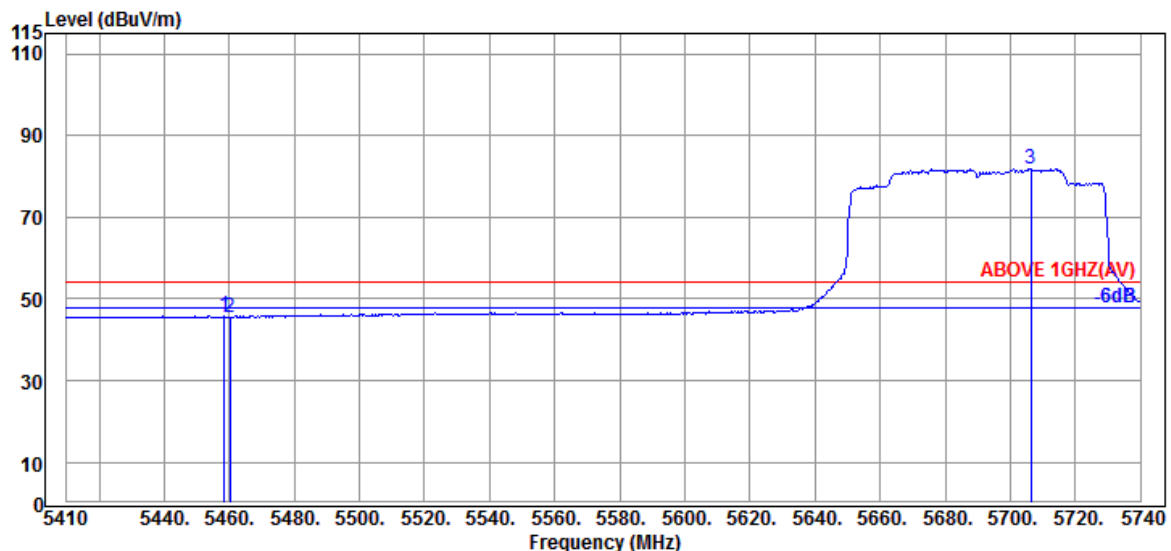

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	34.60	9.05	34.21	36.36	45.80	54.00	8.20	Average
5460.160	34.60	9.05	34.21	36.04	45.48	54.00	8.52	Average
@ 5706.340	34.80	9.19	34.29	72.07	81.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

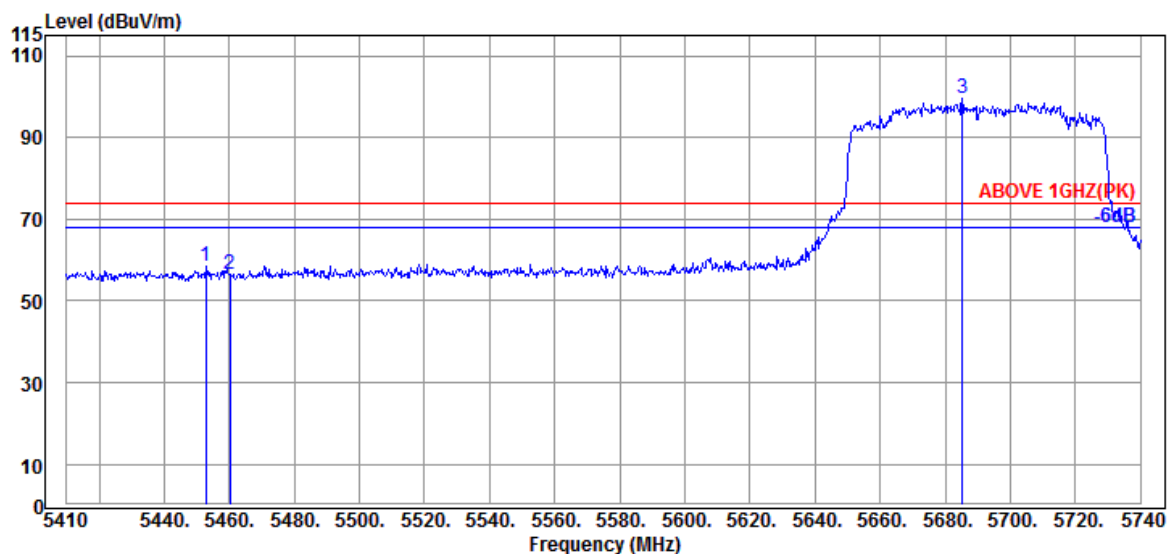

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.900	34.60	9.05	34.21	49.10	58.54	74.00	15.46	Peak
5460.160	34.60	9.05	34.21	47.14	56.58	74.00	17.42	Peak
@ 5685.220	34.63	9.17	34.29	89.99	99.50	---	---	Peak

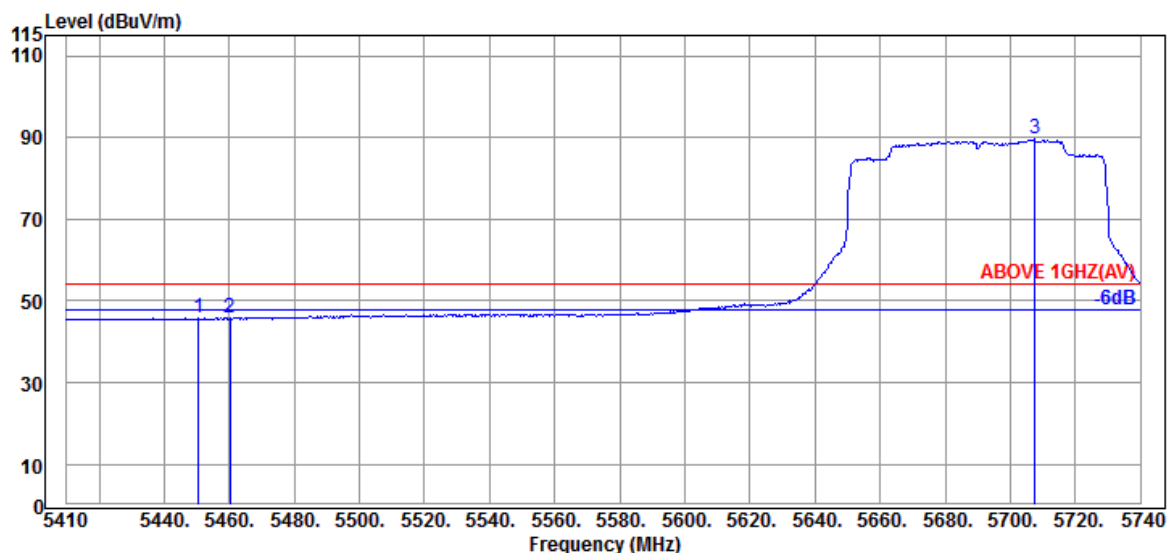

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.60	9.05	34.22	36.41	45.84	54.00	8.16	Average
5460.160	34.60	9.05	34.21	36.29	45.73	54.00	8.27	Average
@ 5707.660	34.80	9.19	34.30	79.88	89.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

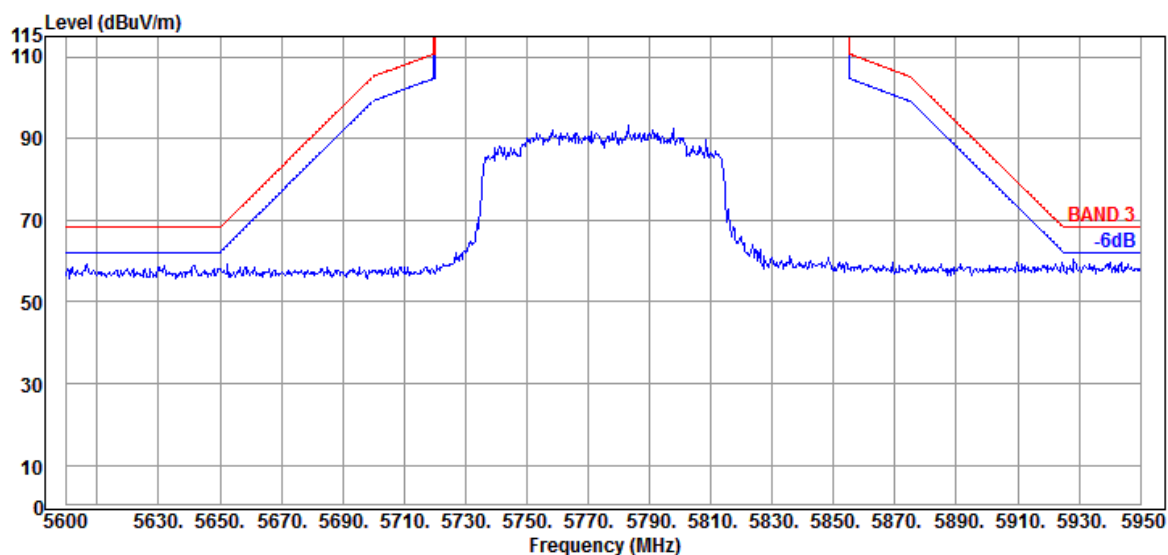


Antenna at Vertical Polarization

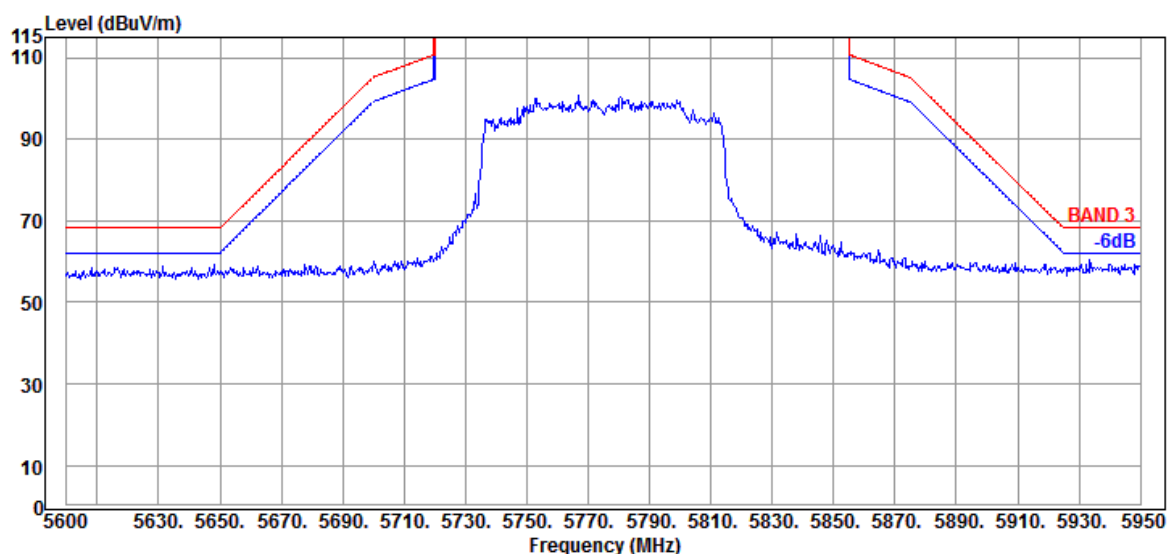

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

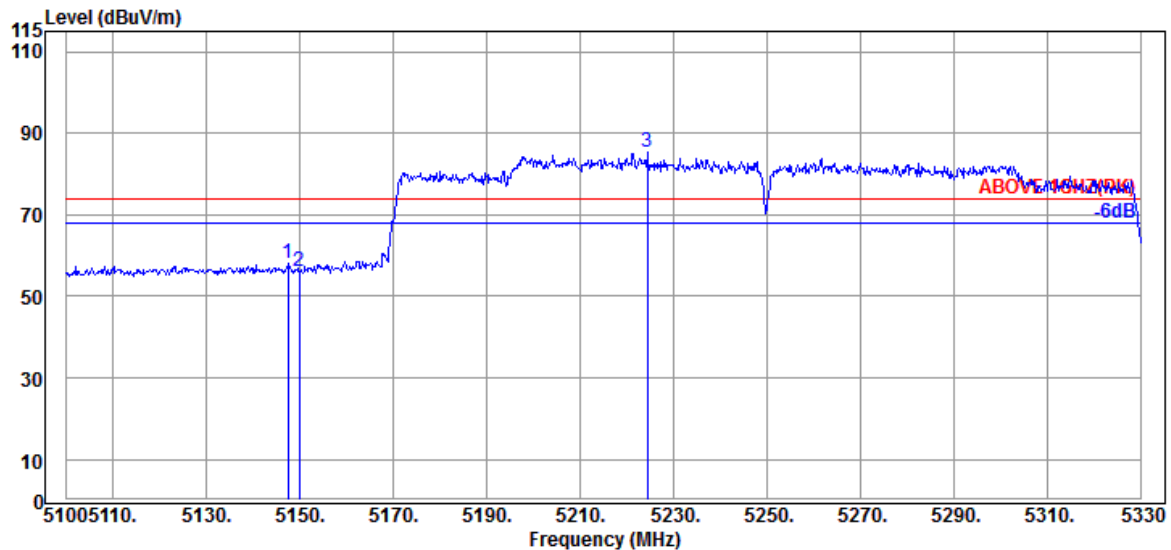

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	34.50	8.88	34.34	49.20	58.24	74.00	15.76	Peak
5149.910	34.50	8.88	34.34	47.27	56.31	74.00	17.69	Peak
@ 5224.430	34.60	8.93	34.30	76.08	85.31	---	---	Peak

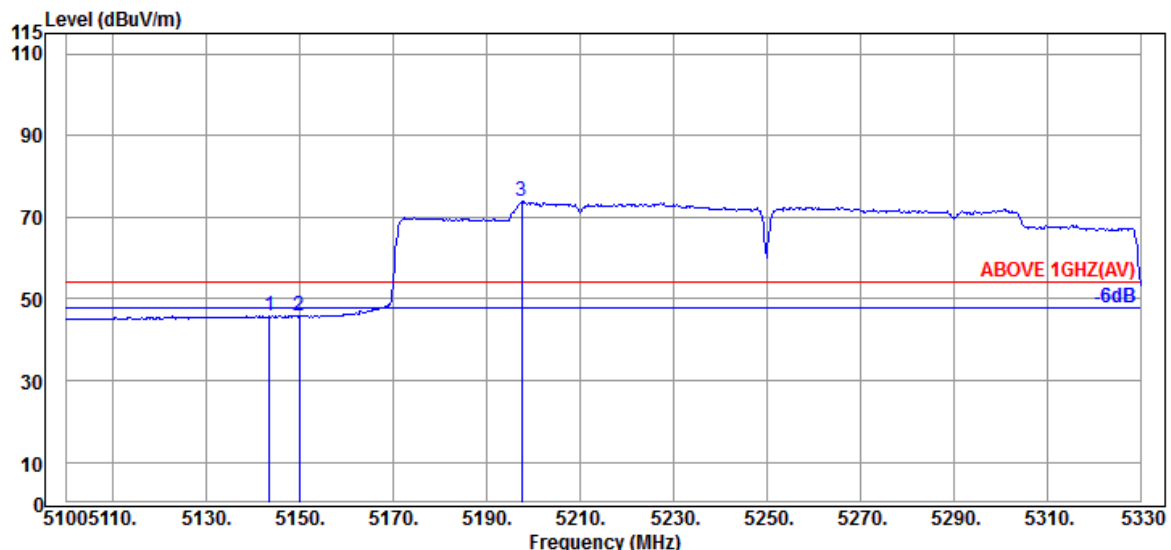

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.470	34.50	8.88	34.34	36.86	45.90	54.00	8.10	Average
5149.910	34.50	8.88	34.34	36.74	45.78	54.00	8.22	Average
@ 5197.520	34.70	8.91	34.32	64.51	73.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142


Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

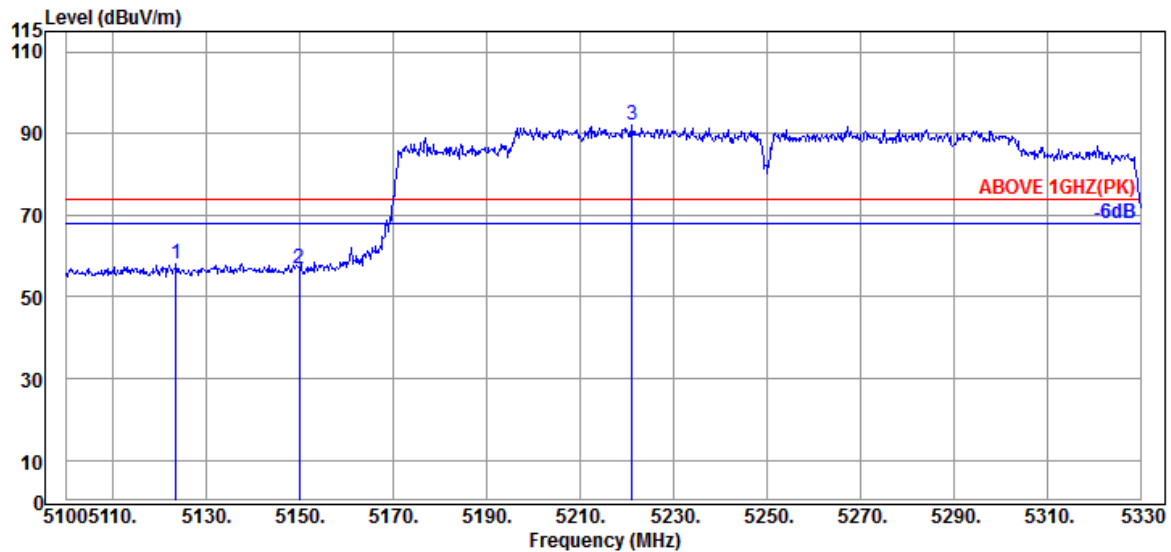

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.460	34.30	8.87	34.34	49.37	58.20	74.00	15.80	Peak
5149.910	34.50	8.88	34.34	47.92	56.96	74.00	17.04	Peak
@ 5221.210	34.60	8.93	34.31	82.90	92.12	---	---	Peak

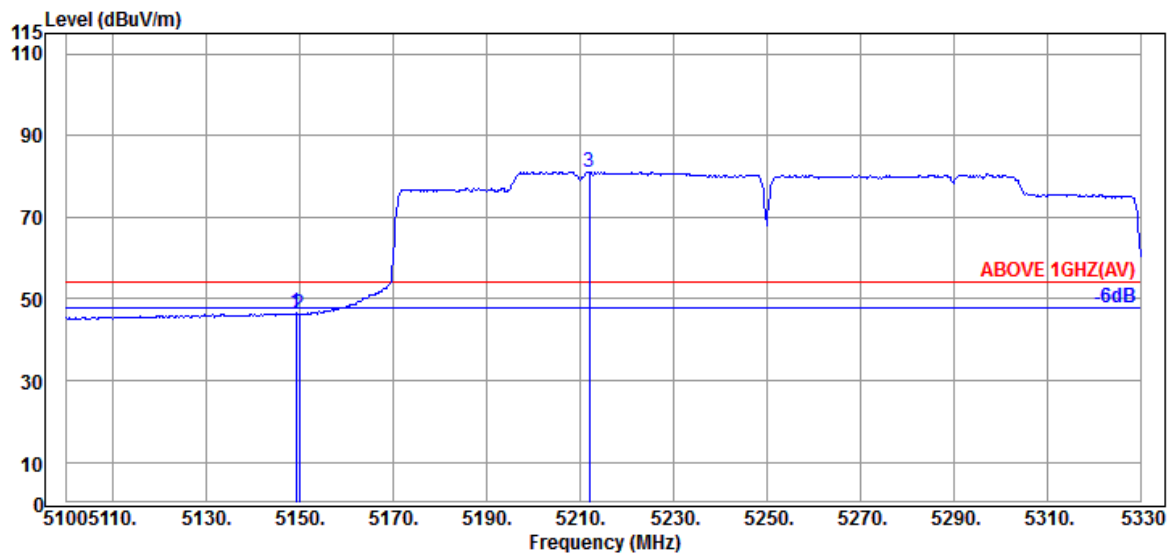

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.50	8.88	34.34	37.43	46.47	54.00	7.53	Average
5149.910	34.50	8.88	34.34	37.06	46.10	54.00	7.90	Average
@ 5212.010	34.65	8.92	34.31	71.85	81.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

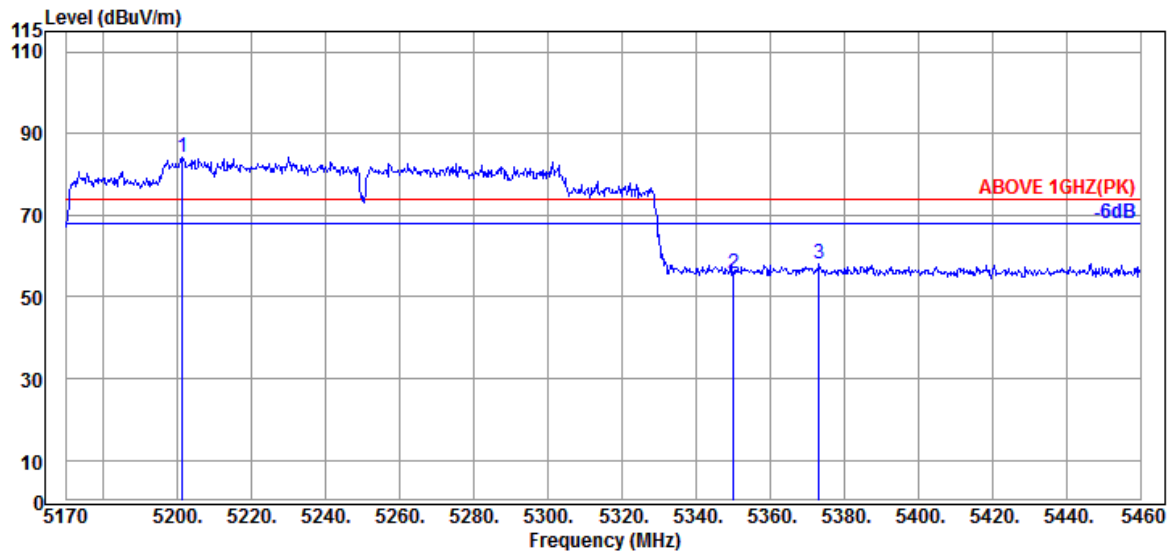

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5201.320	34.70	8.91	34.32	75.06	84.35	---	---	Peak
5350.090	34.90	8.99	34.26	46.18	55.81	74.00	18.19	Peak
5373.290	34.83	9.01	34.25	48.43	58.02	74.00	15.98	Peak

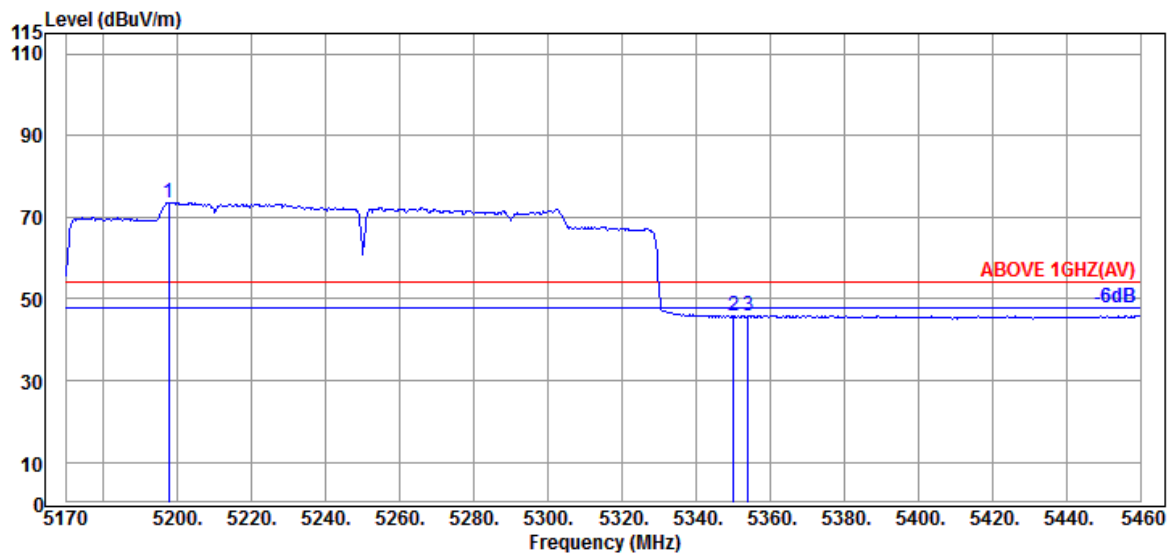

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.550	34.70	8.91	34.32	64.34	73.63	---	---	Average
5350.090	34.90	8.99	34.26	36.09	45.72	54.00	8.28	Average
5354.150	34.87	9.00	34.26	36.27	45.88	54.00	8.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

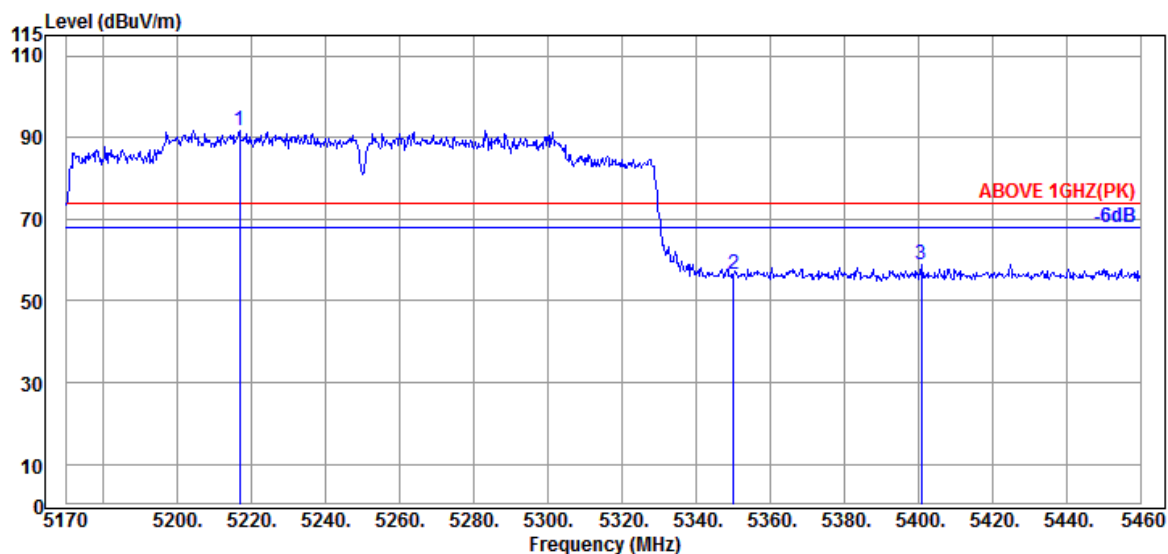

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5216.690	34.60	8.93	34.31	82.65	91.87	---	---	Peak
	5350.090	34.90	8.99	34.26	46.88	56.51	74.00	17.49	Peak
	5400.840	34.75	9.03	34.23	49.36	58.91	74.00	15.09	Peak

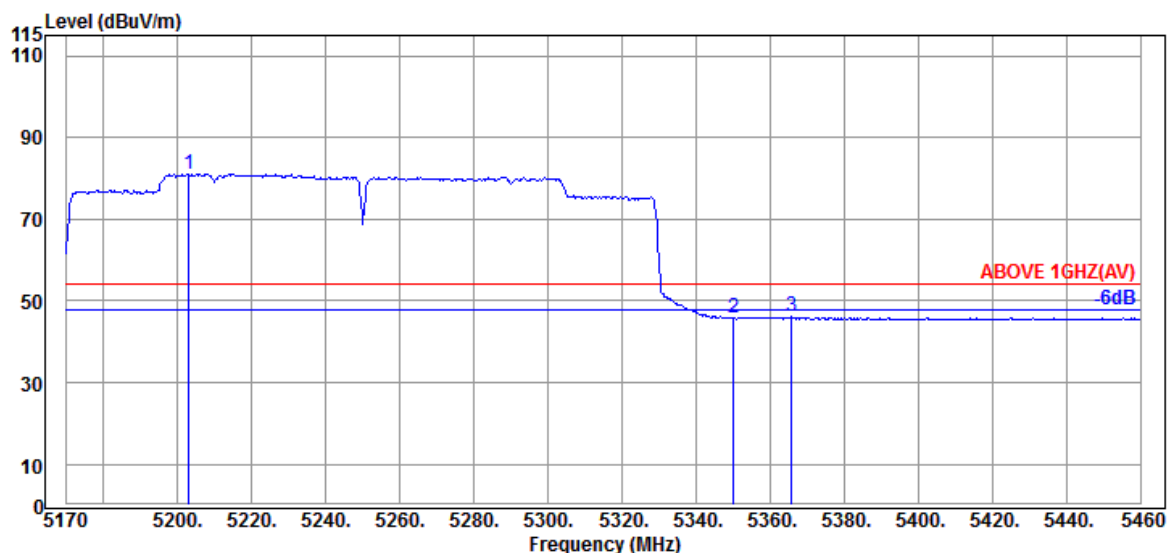

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5203.060	34.65	8.92	34.32	71.89	81.14	---	---	Average
	5350.090	34.90	8.99	34.26	36.28	45.91	54.00	8.09	Average
	5365.750	34.87	9.00	34.25	36.46	46.08	54.00	7.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

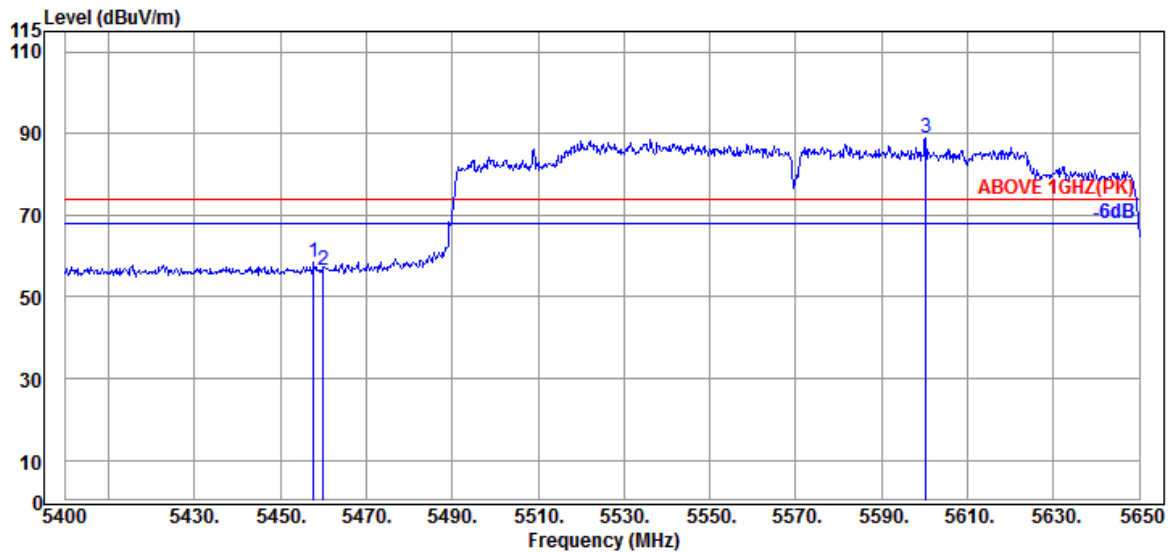

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.750	34.60	9.05	34.21	49.01	58.45	74.00	15.55	Peak
5460.000	34.60	9.05	34.21	47.15	56.59	74.00	17.41	Peak
@ 5600.250	34.40	9.13	34.25	79.66	88.94	---	---	Peak

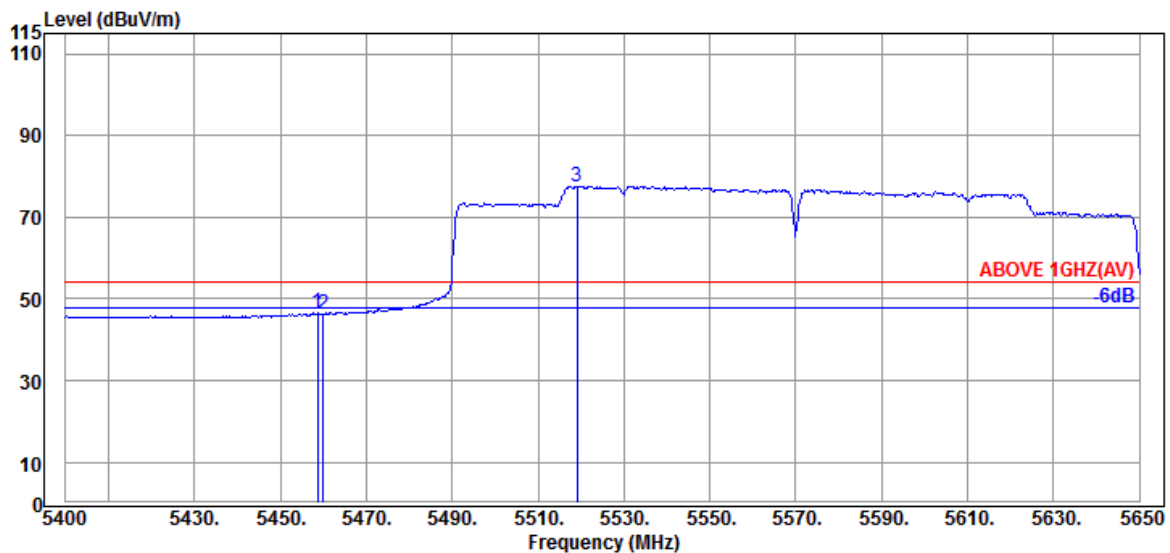

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.60	9.05	34.21	37.01	46.45	54.00	7.55	Average
5460.000	34.60	9.05	34.21	36.92	46.36	54.00	7.64	Average
@ 5519.000	34.70	9.09	34.21	68.07	77.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

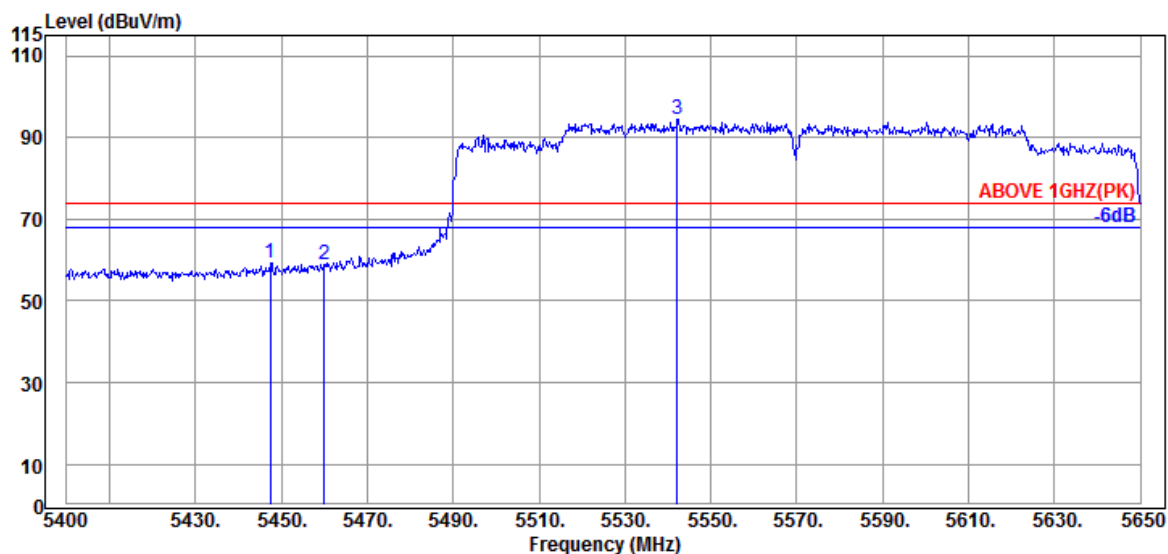

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.500	34.65	9.04	34.22	49.89	59.36	74.00	14.64	Peak
5460.000	34.60	9.05	34.21	49.57	59.01	74.00	14.99	Peak
@ 5542.250	34.70	9.09	34.23	84.89	94.45	---	---	Peak

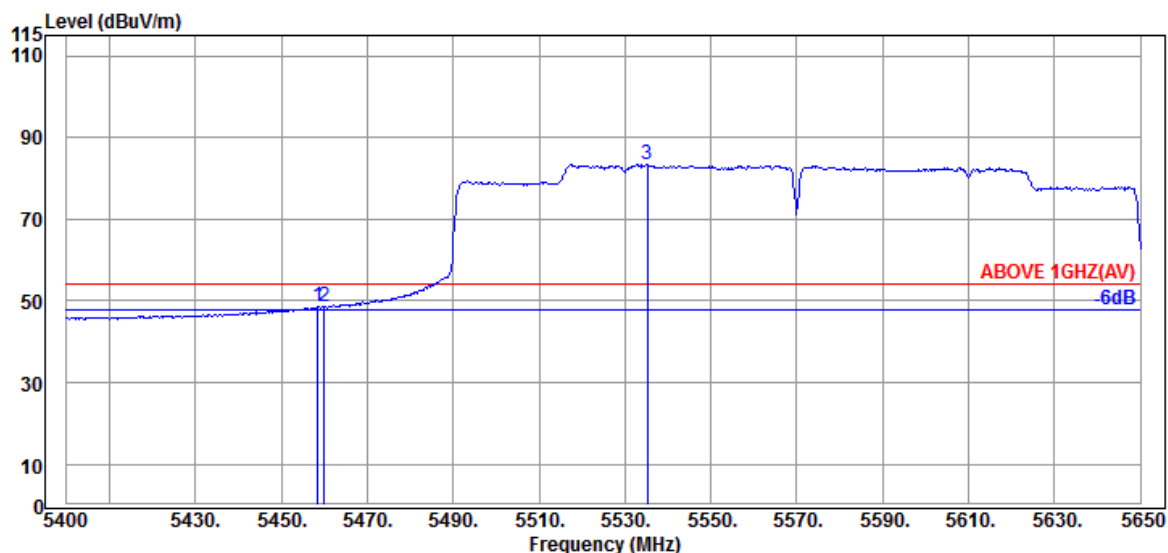

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.60	9.05	34.21	39.15	48.59	54.00	5.41	Average
5460.000	34.60	9.05	34.21	39.03	48.47	54.00	5.53	Average
@ 5535.250	34.70	9.09	34.22	73.86	83.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

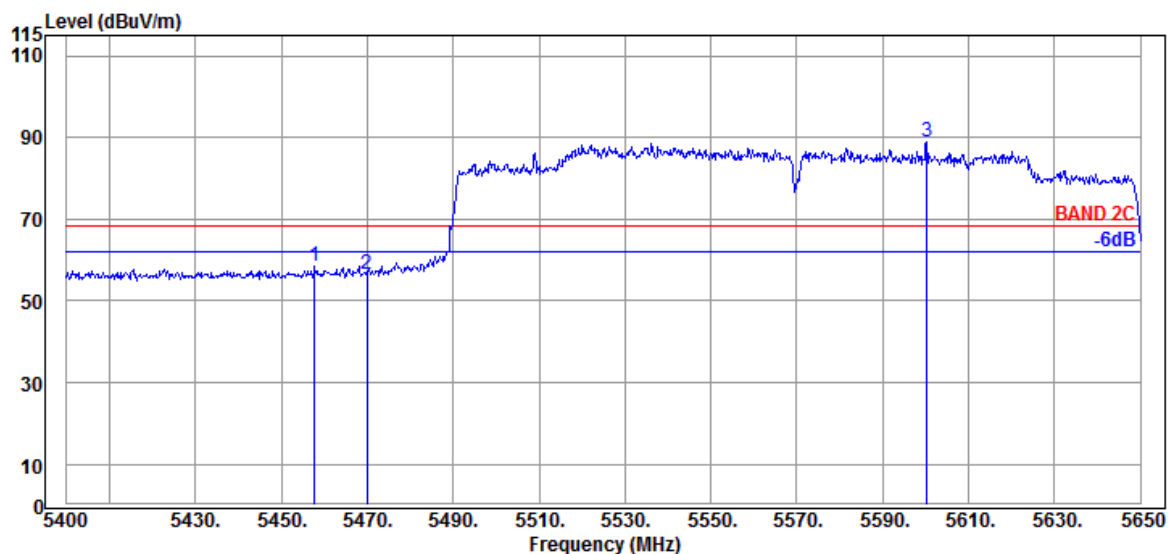

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5457.750	34.60	9.05	34.21	49.01	58.45	68.20	9.75	Peak
	5470.000	34.63	9.06	34.21	47.13	56.61	68.20	11.59	Peak
	5600.250	34.40	9.13	34.25	79.66	88.94	---	---	Peak

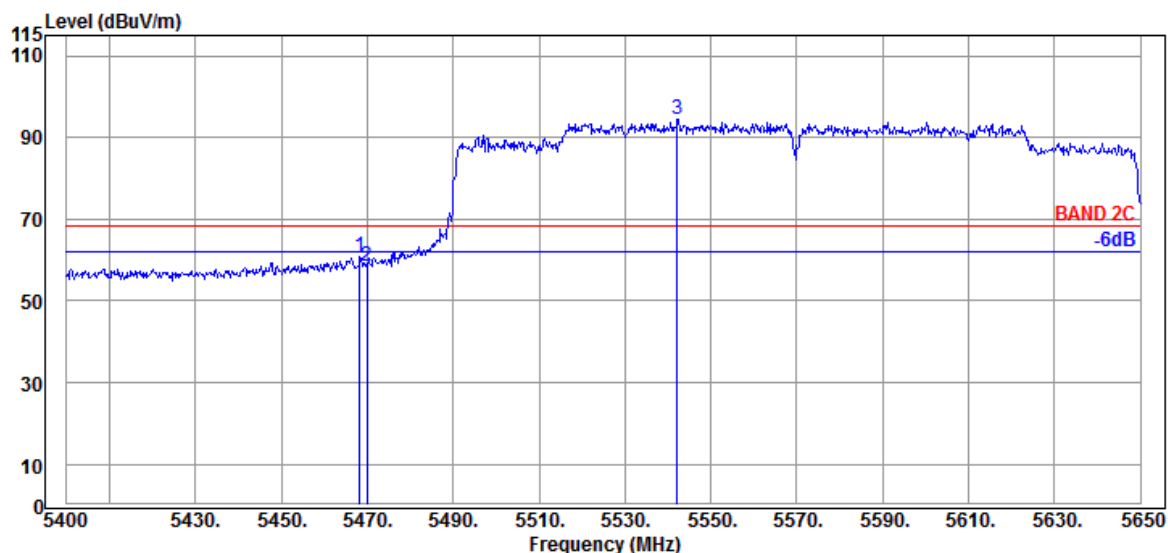

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5468.250	34.63	9.06	34.21	51.55	61.03	68.20	7.17	Peak
	5470.000	34.63	9.06	34.21	49.16	58.64	68.20	9.56	Peak
	5542.250	34.70	9.09	34.23	84.89	94.45	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

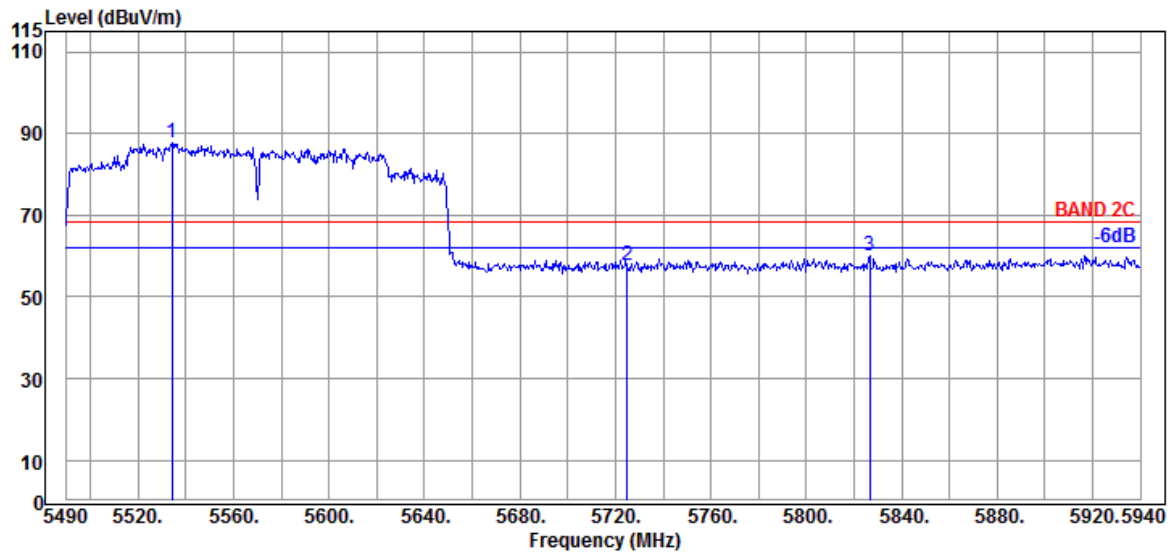

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5534.100	34.70	9.09	34.22	78.00	87.57	---	---	Peak
	5724.900	34.90	9.20	34.30	47.93	57.73	68.20	10.47	Peak
	5826.600	35.30	9.25	34.35	49.82	60.02	68.20	8.18	Peak

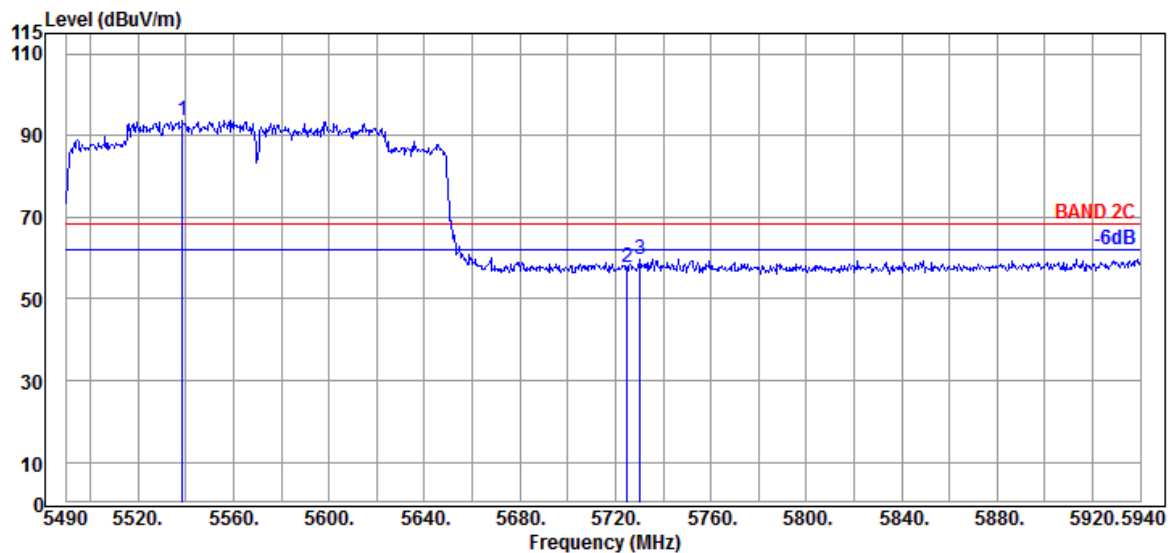

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5538.600	34.70	9.09	34.22	84.08	93.65	---	---	Peak
	5724.900	34.90	9.20	34.30	47.98	57.78	68.20	10.42	Peak
	5730.300	34.90	9.20	34.31	49.96	59.75	68.20	8.45	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

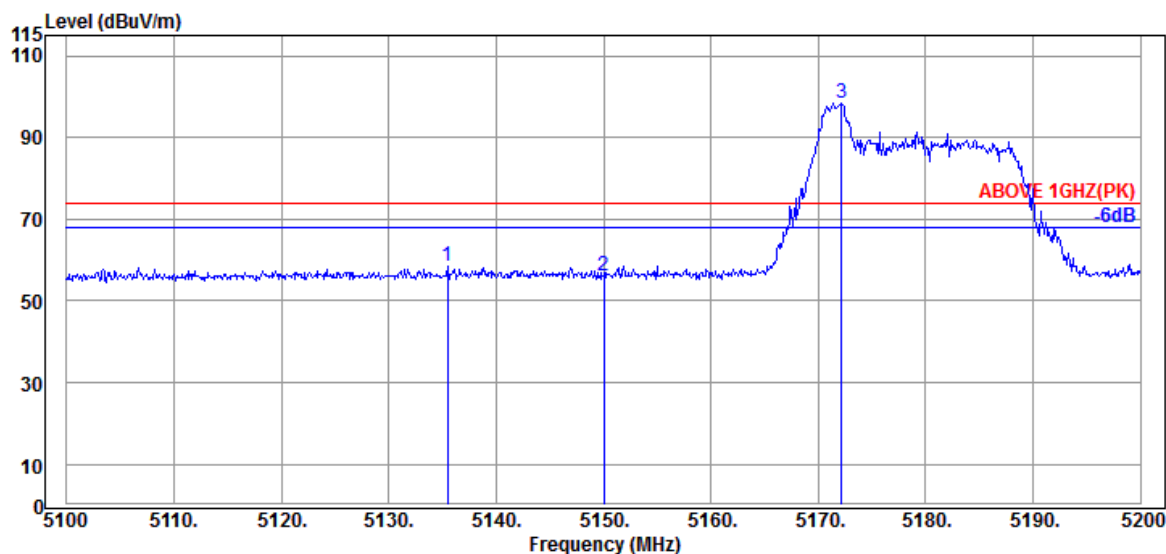

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.500	34.40	8.88	34.34	49.35	58.29	74.00	15.71	Peak
5150.000	34.50	8.88	34.34	47.08	56.12	74.00	17.88	Peak
@ 5172.200	34.63	8.90	34.33	89.11	98.31	---	---	Peak

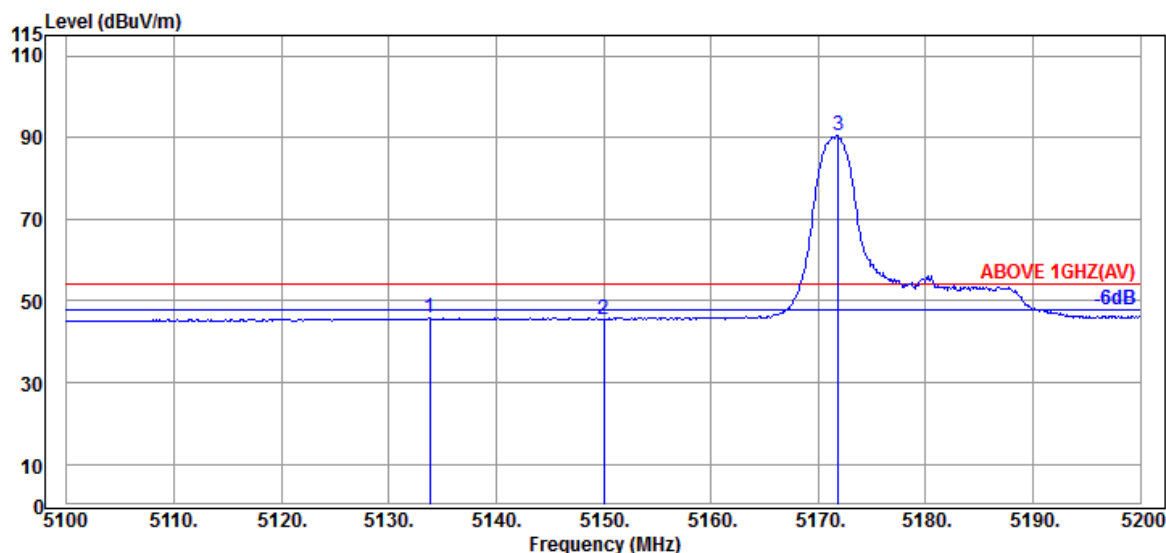

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.800	34.40	8.88	34.34	36.96	45.90	54.00	8.10	Average
5150.000	34.50	8.88	34.34	36.54	45.58	54.00	8.42	Average
@ 5171.900	34.63	8.90	34.33	81.39	90.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

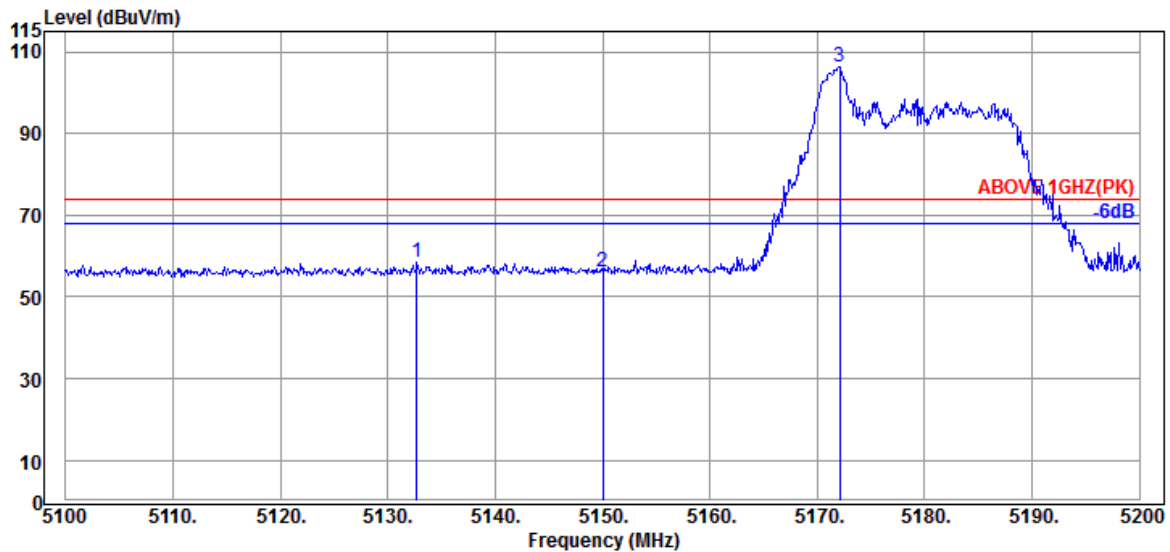

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5132.700	34.40	8.88	34.34	49.37	58.31	74.00	15.69	Peak
5150.000	34.50	8.88	34.34	47.08	56.12	74.00	17.88	Peak
@ 5172.100	34.63	8.90	34.33	97.17	106.37	---	---	Peak

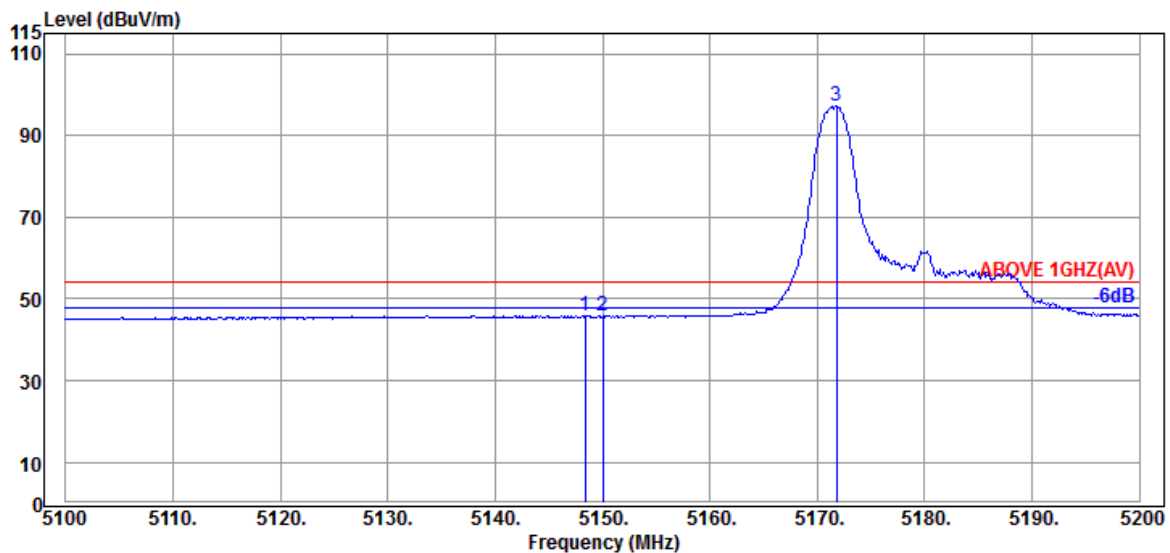

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.400	34.50	8.88	34.34	36.78	45.82	54.00	8.18	Average
5150.000	34.50	8.88	34.34	36.70	45.74	54.00	8.26	Average
@ 5171.800	34.63	8.90	34.33	88.03	97.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

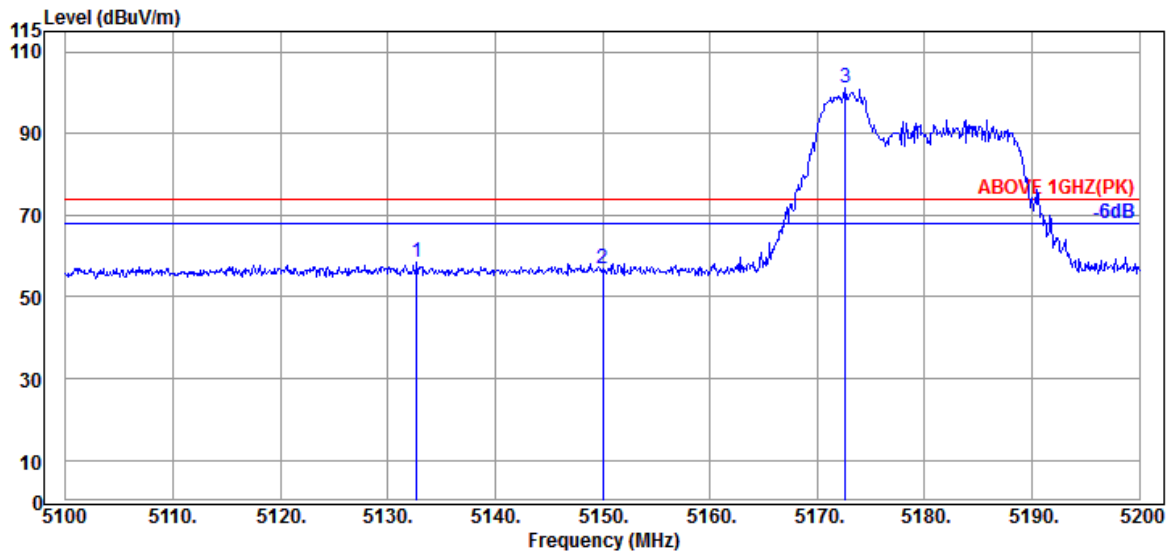

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.700	34.40	8.88	34.34	49.73	58.67	74.00	15.33	Peak
5150.000	34.50	8.88	34.34	47.73	56.77	74.00	17.23	Peak
@ 5172.600	34.63	8.90	34.33	91.82	101.02	---	---	Peak

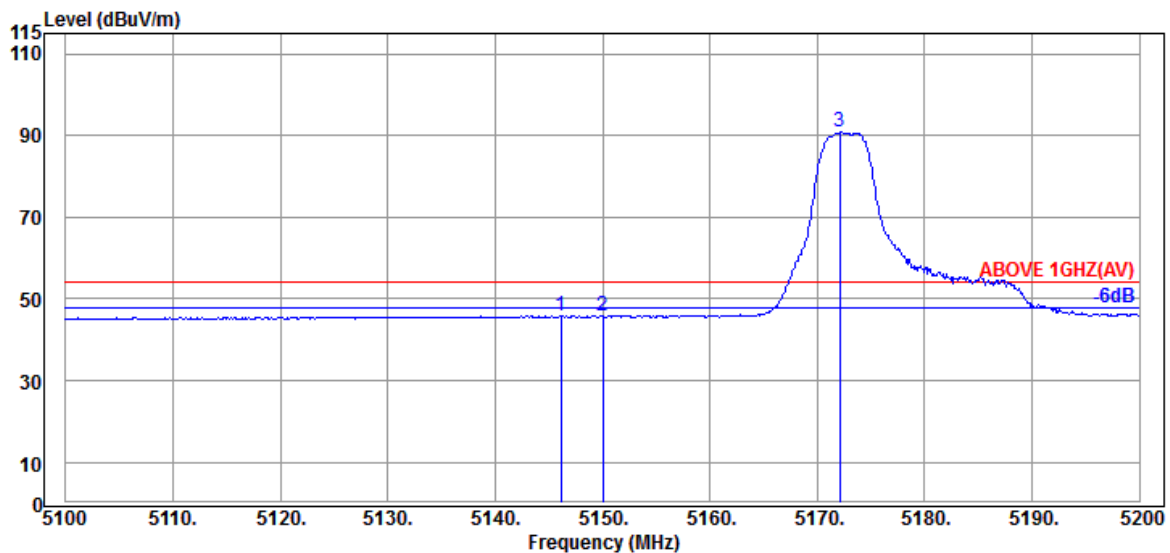

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	34.50	8.88	34.34	36.95	45.99	54.00	8.01	Average
5150.000	34.50	8.88	34.34	36.62	45.66	54.00	8.34	Average
@ 5172.100	34.63	8.90	34.33	81.69	90.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

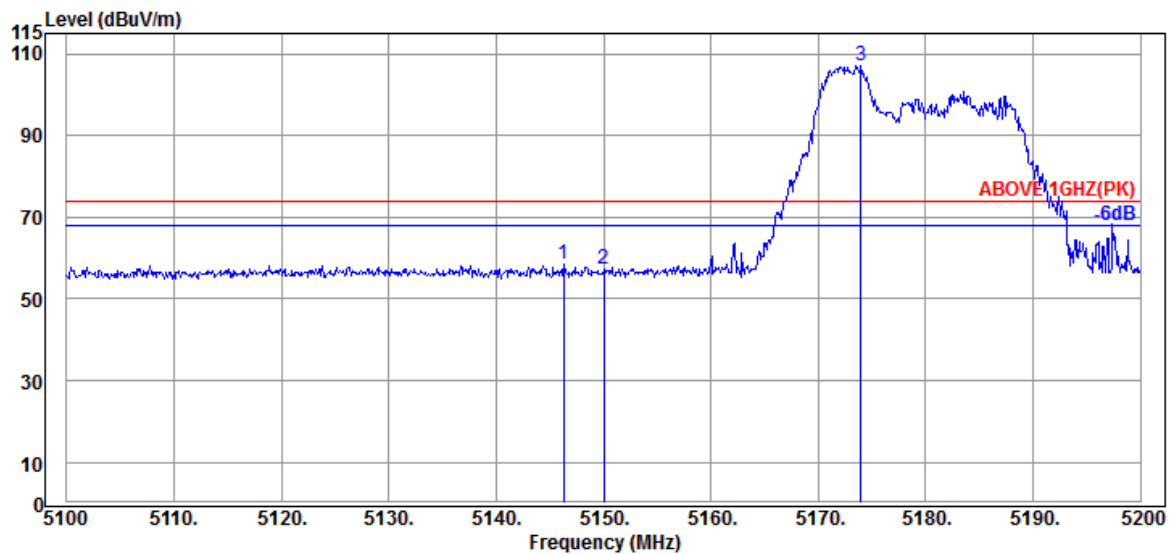

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	34.50	8.88	34.34	49.60	58.64	74.00	15.36	Peak
5150.000	34.50	8.88	34.34	48.07	57.11	74.00	16.89	Peak
@ 5174.000	34.63	8.90	34.32	97.88	107.09	---	---	Peak

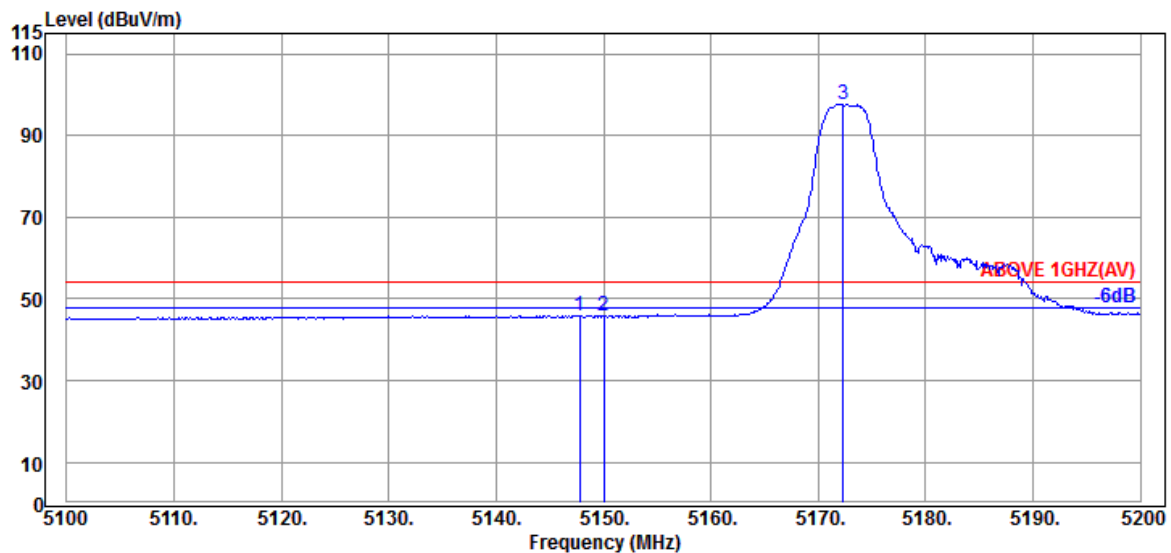

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	34.50	8.88	34.34	36.84	45.88	54.00	8.12	Average
5150.000	34.50	8.88	34.34	36.61	45.65	54.00	8.35	Average
@ 5172.300	34.63	8.90	34.33	88.39	97.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

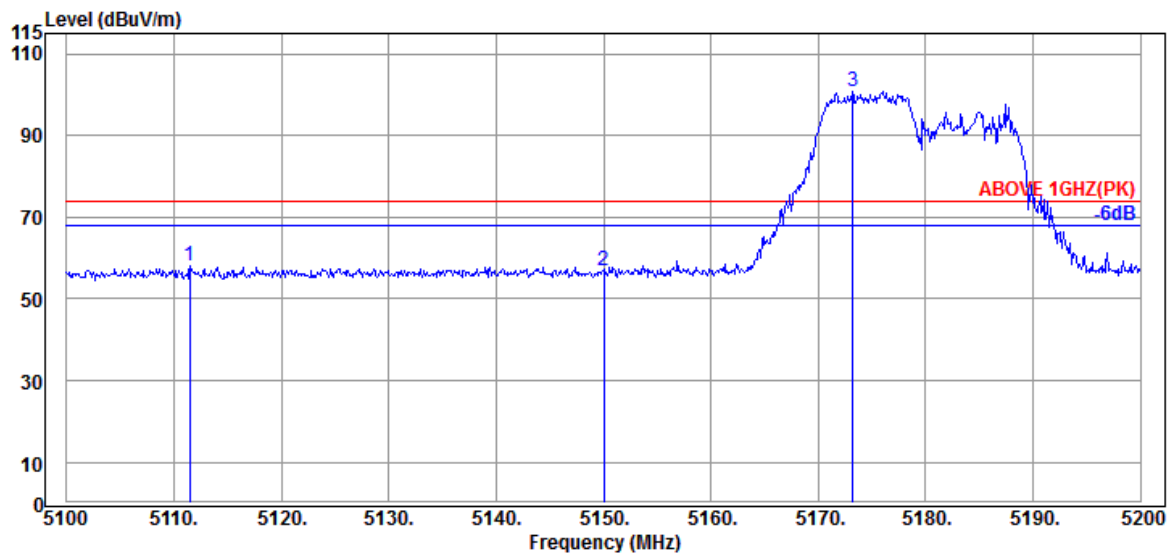

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.500	34.20	8.86	34.35	49.32	58.03	74.00	15.97	Peak
5150.000	34.50	8.88	34.34	48.06	57.10	74.00	16.90	Peak
@ 5173.200	34.63	8.90	34.32	91.56	100.77	---	---	Peak

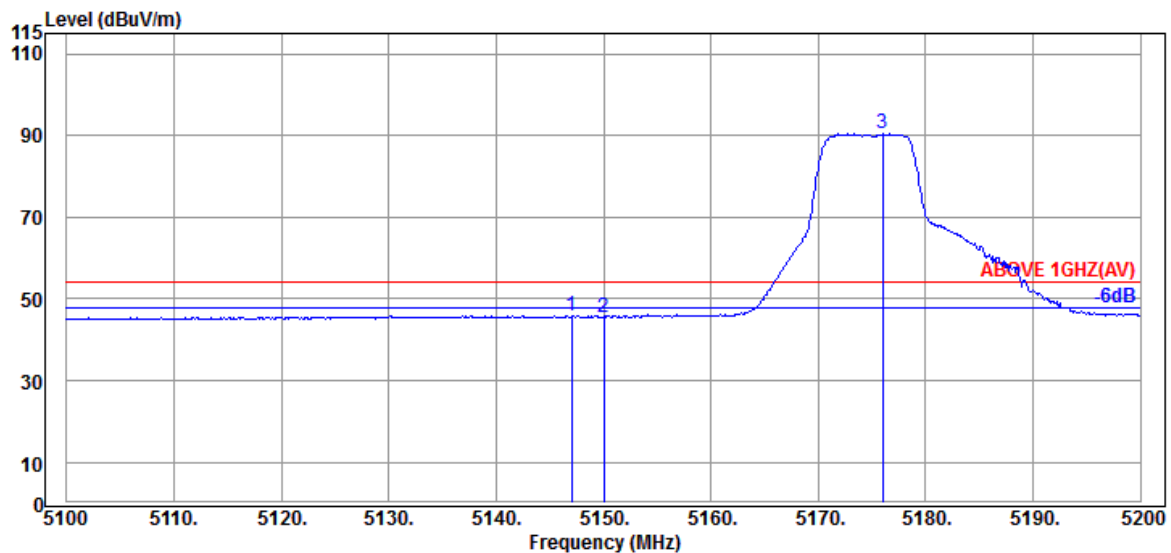

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	34.50	8.88	34.34	36.87	45.91	54.00	8.09	Average
5150.000	34.50	8.88	34.34	36.49	45.53	54.00	8.47	Average
@ 5176.000	34.63	8.90	34.32	81.14	90.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

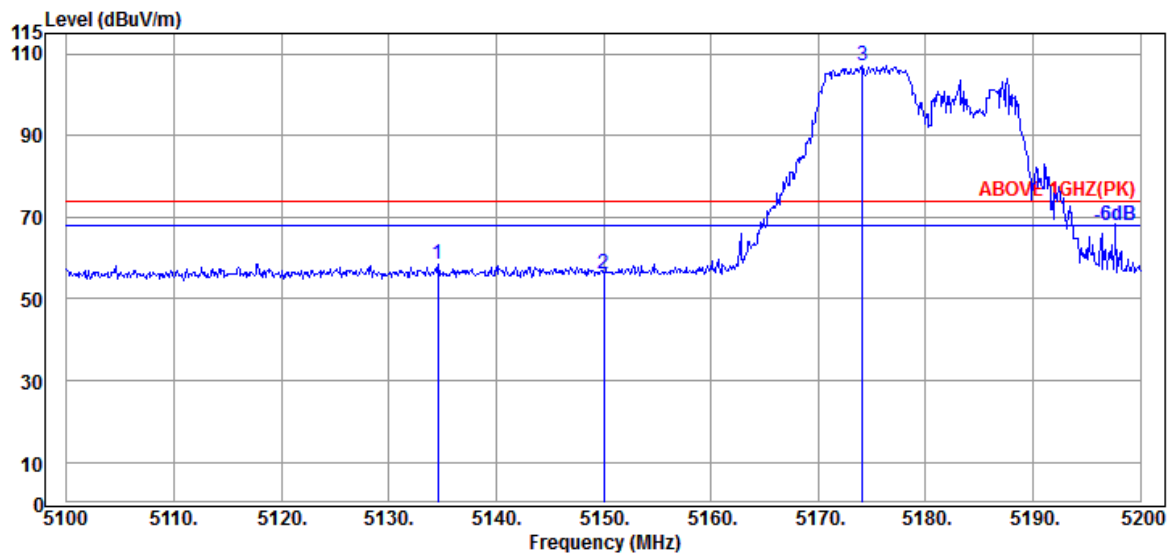

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.600	34.40	8.88	34.34	49.71	58.65	74.00	15.35	Peak
5150.000	34.50	8.88	34.34	47.03	56.07	74.00	17.93	Peak
@ 5174.100	34.63	8.90	34.32	97.92	107.13	---	---	Peak

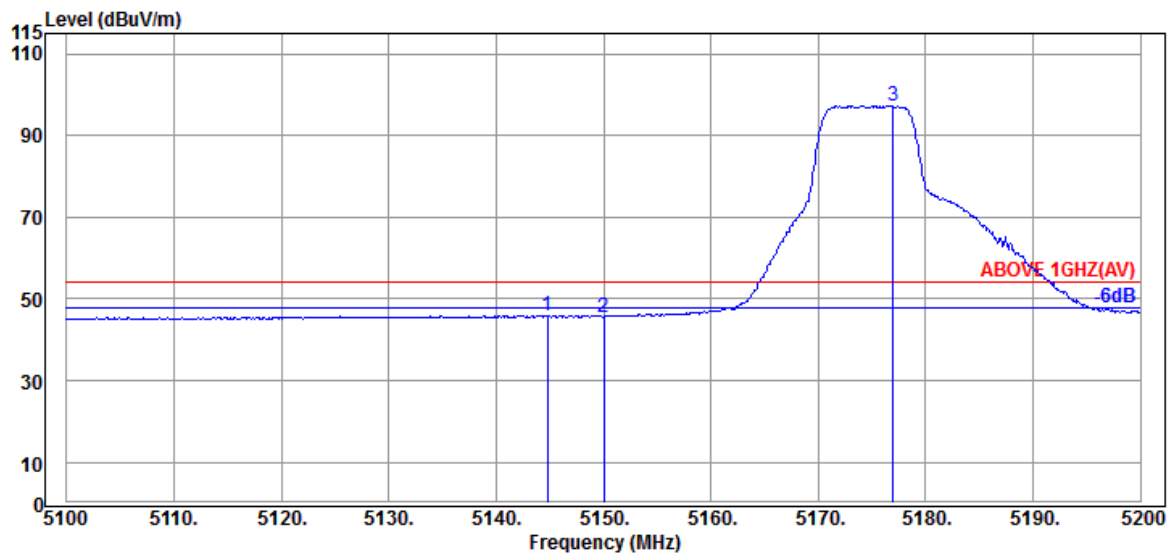

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	34.50	8.88	34.34	36.94	45.98	54.00	8.02	Average
5150.000	34.50	8.88	34.34	36.60	45.64	54.00	8.36	Average
@ 5177.000	34.63	8.90	34.32	88.01	97.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

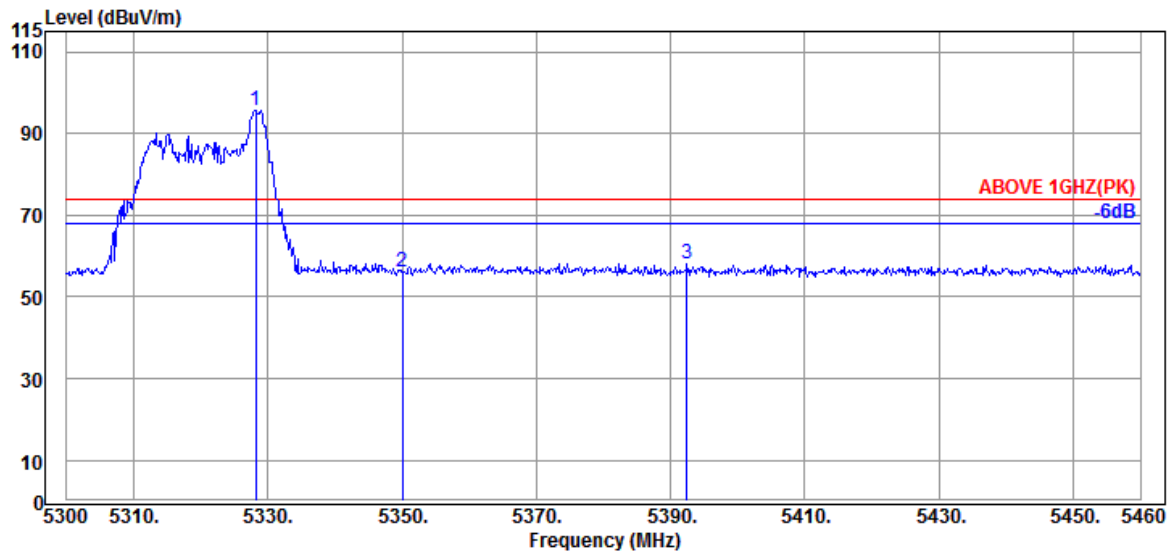

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.160	34.73	8.99	34.26	86.27	95.73	---	---	Peak
	5350.080	34.90	8.99	34.26	46.43	56.06	74.00	17.94	Peak
	5392.480	34.80	9.02	34.24	48.65	58.23	74.00	15.77	Peak

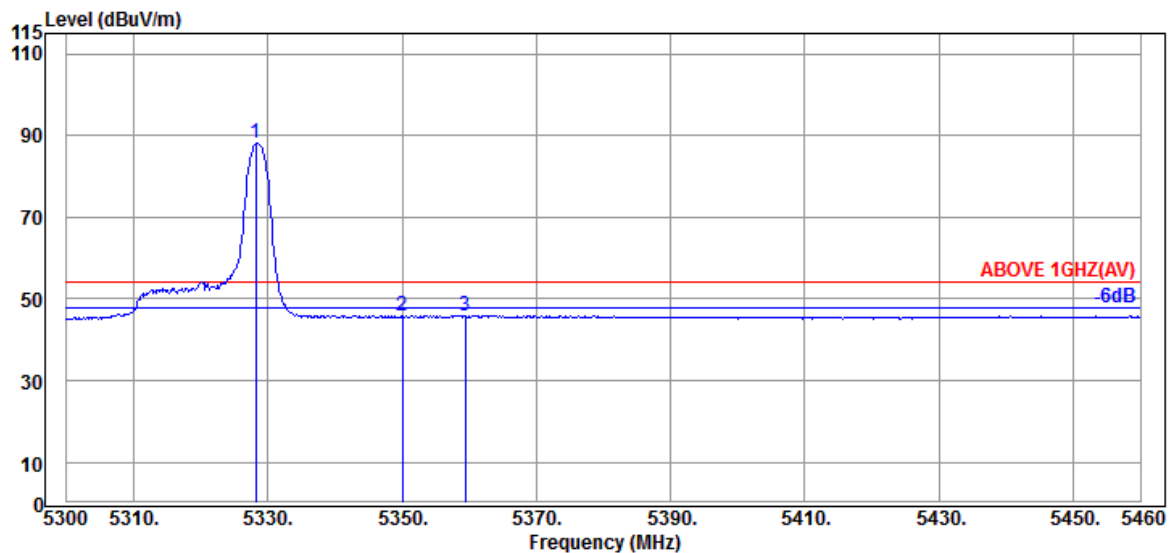

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.160	34.73	8.99	34.26	78.61	88.07	---	---	Average
	5350.080	34.90	8.99	34.26	36.10	45.73	54.00	8.27	Average
	5359.360	34.87	9.00	34.26	36.32	45.93	54.00	8.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

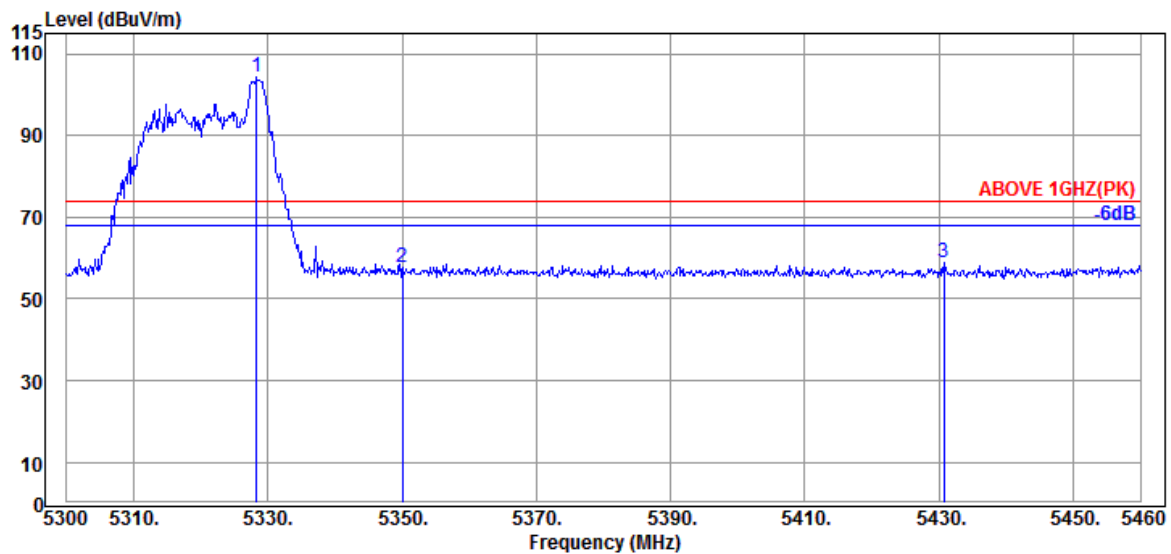

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.320	34.73	8.99	34.26	94.70	104.16	---	---	Peak
	5350.080	34.90	8.99	34.26	48.22	57.85	74.00	16.15	Peak
	5430.720	34.70	9.04	34.23	49.24	58.75	74.00	15.25	Peak

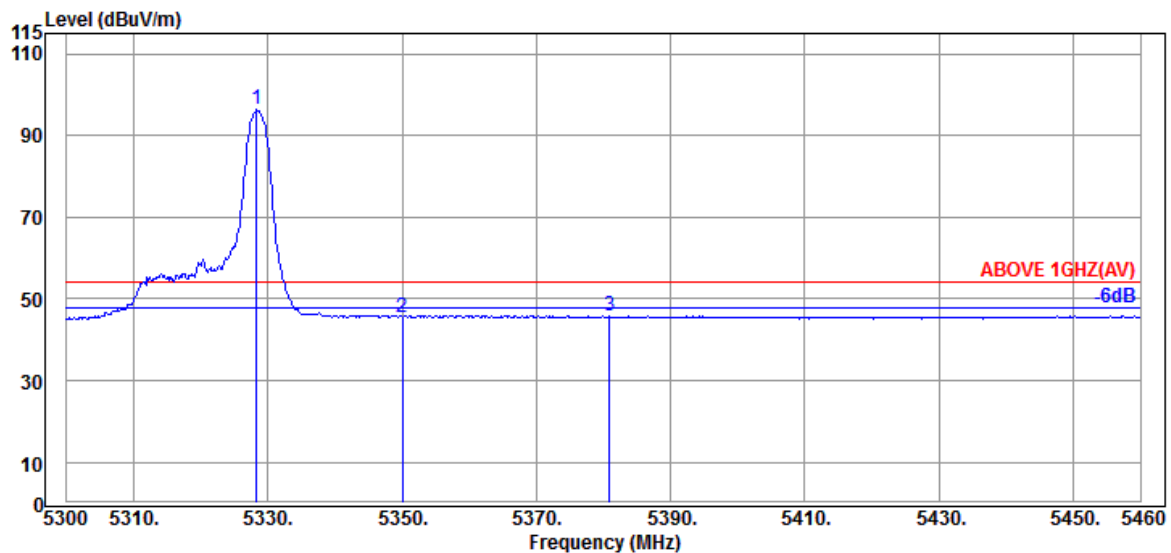

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.320	34.73	8.99	34.26	86.86	96.32	---	---	Average
	5350.080	34.90	8.99	34.26	36.00	45.63	54.00	8.37	Average
	5380.960	34.83	9.01	34.24	36.36	45.96	54.00	8.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

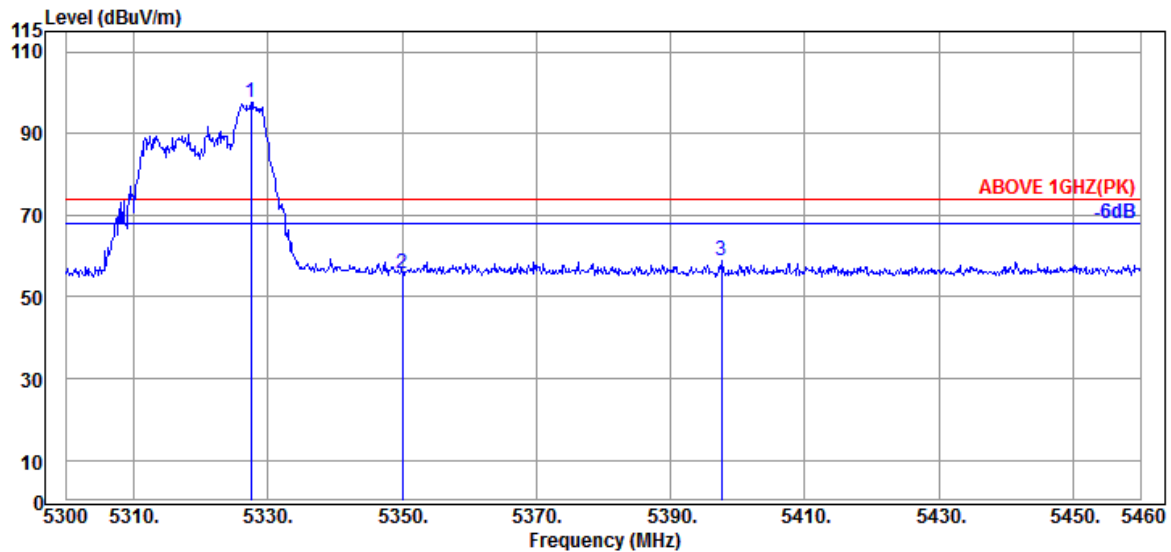

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.520	34.73	8.99	34.27	88.30	97.75	---	---	Peak
5350.080	34.90	8.99	34.26	46.10	55.73	74.00	18.27	Peak
5397.600	34.80	9.02	34.24	49.42	59.00	74.00	15.00	Peak

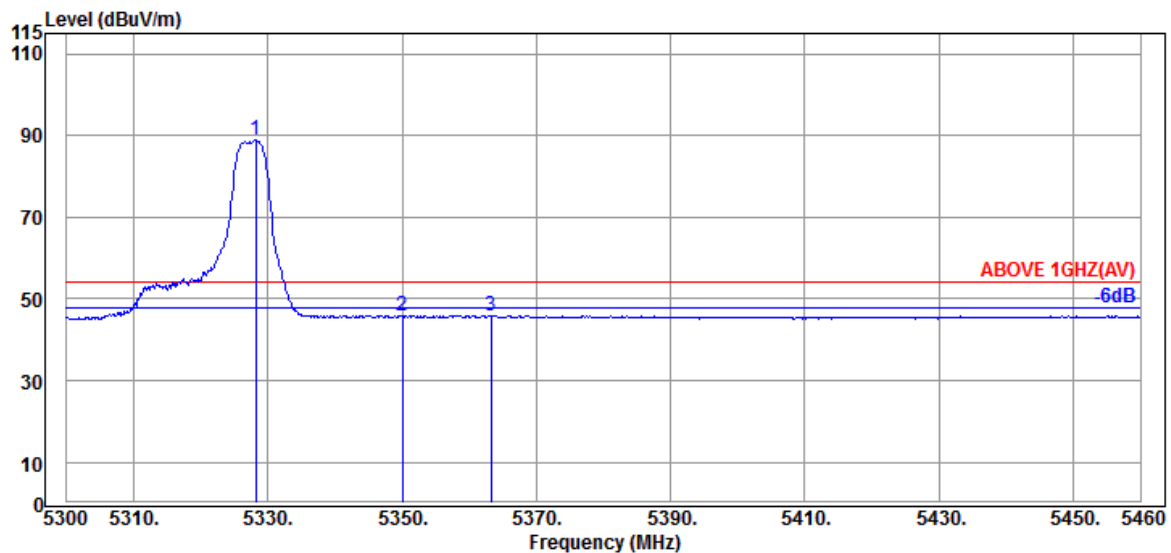

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	79.41	88.87	---	---	Average
5350.080	34.90	8.99	34.26	36.02	45.65	54.00	8.35	Average
5363.200	34.87	9.00	34.25	36.25	45.87	54.00	8.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

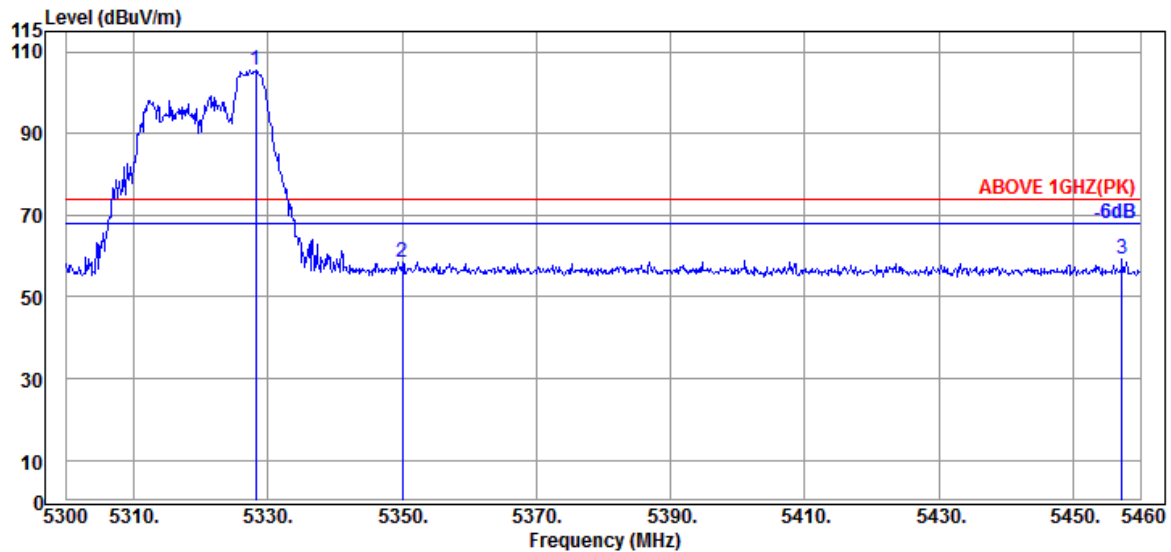

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	96.11	105.57	---	---	Peak
5350.080	34.90	8.99	34.26	48.93	58.56	74.00	15.44	Peak
5457.280	34.60	9.05	34.21	49.73	59.17	74.00	14.83	Peak

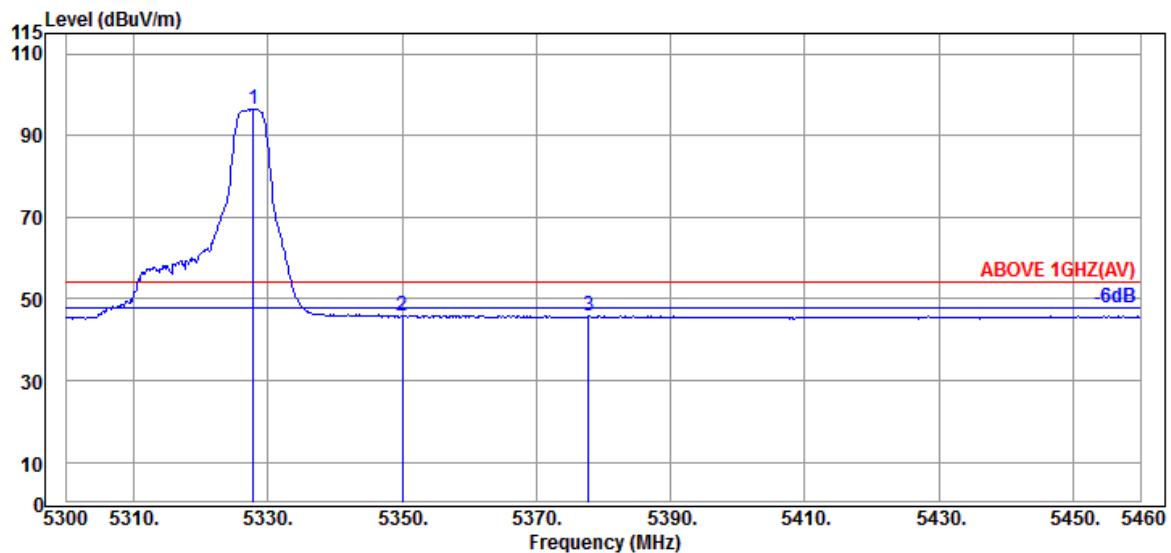

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.73	8.99	34.27	87.10	96.55	---	---	Average
5350.080	34.90	8.99	34.26	36.11	45.74	54.00	8.26	Average
5377.760	34.83	9.01	34.25	36.36	45.95	54.00	8.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

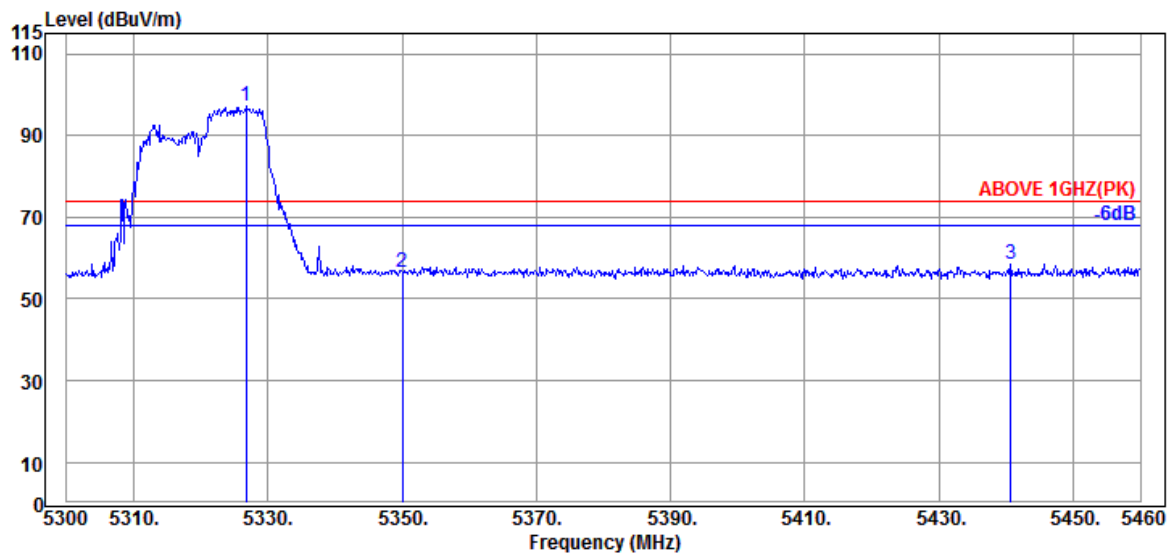

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.720	34.73	8.99	34.27	87.60	97.05	---	---	Peak
5350.080	34.90	8.99	34.26	46.80	56.43	74.00	17.57	Peak
5440.640	34.65	9.04	34.22	49.09	58.56	74.00	15.44	Peak

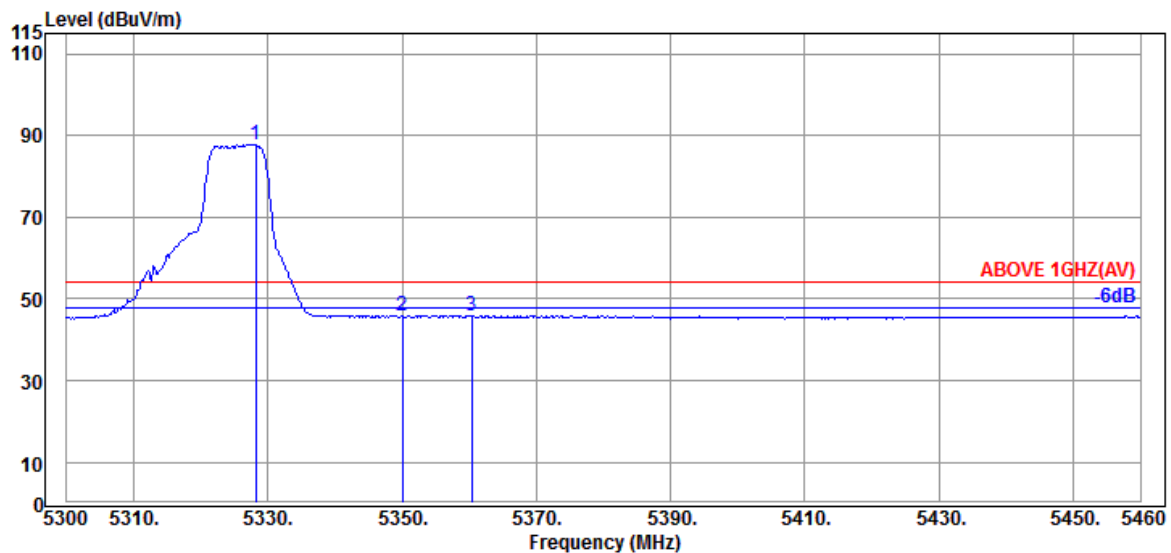

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.73	8.99	34.26	78.38	87.84	---	---	Average
5350.080	34.90	8.99	34.26	36.15	45.78	54.00	8.22	Average
5360.320	34.87	9.00	34.26	36.40	46.01	54.00	7.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

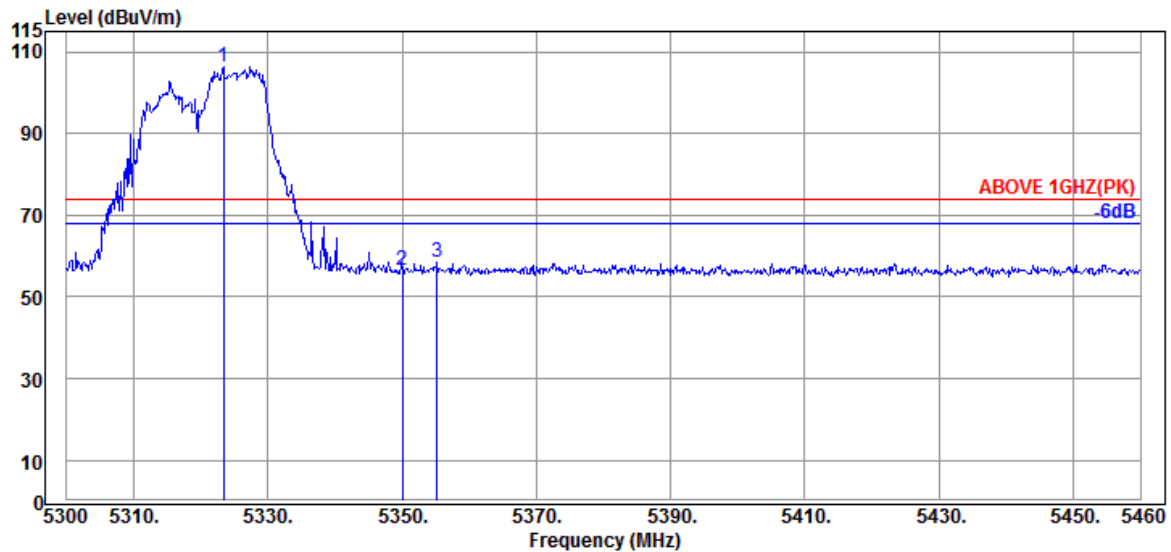

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	34.73	8.99	34.27	96.75	106.20	---	---	Peak
5350.080	34.90	8.99	34.26	47.00	56.63	74.00	17.37	Peak
5355.200	34.87	9.00	34.26	48.83	58.44	74.00	15.56	Peak

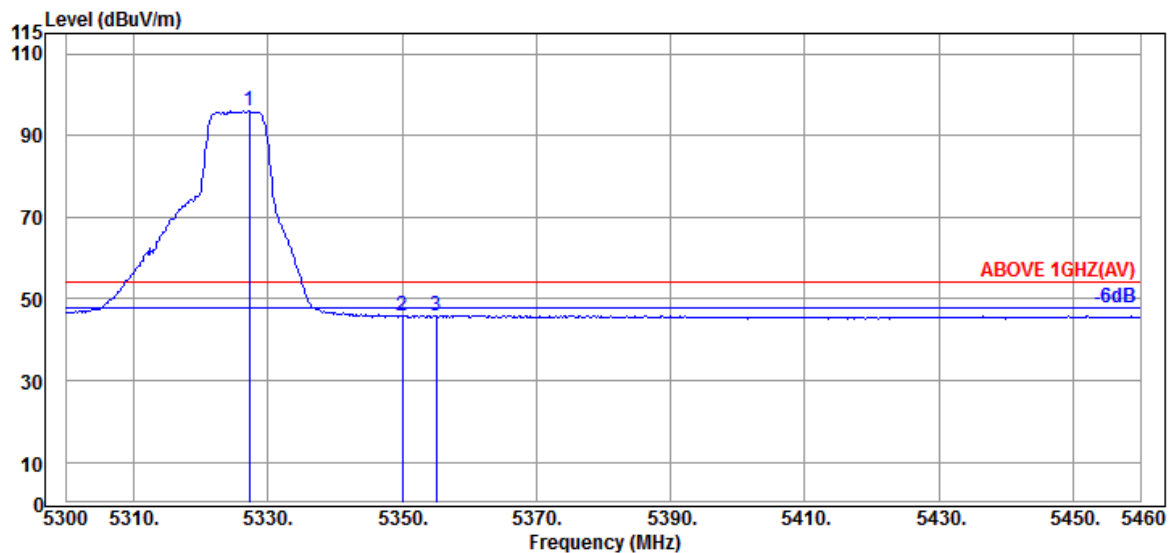

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	34.73	8.99	34.27	86.61	96.06	---	---	Average
5350.080	34.90	8.99	34.26	36.07	45.70	54.00	8.30	Average
5355.040	34.87	9.00	34.26	36.41	46.02	54.00	7.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

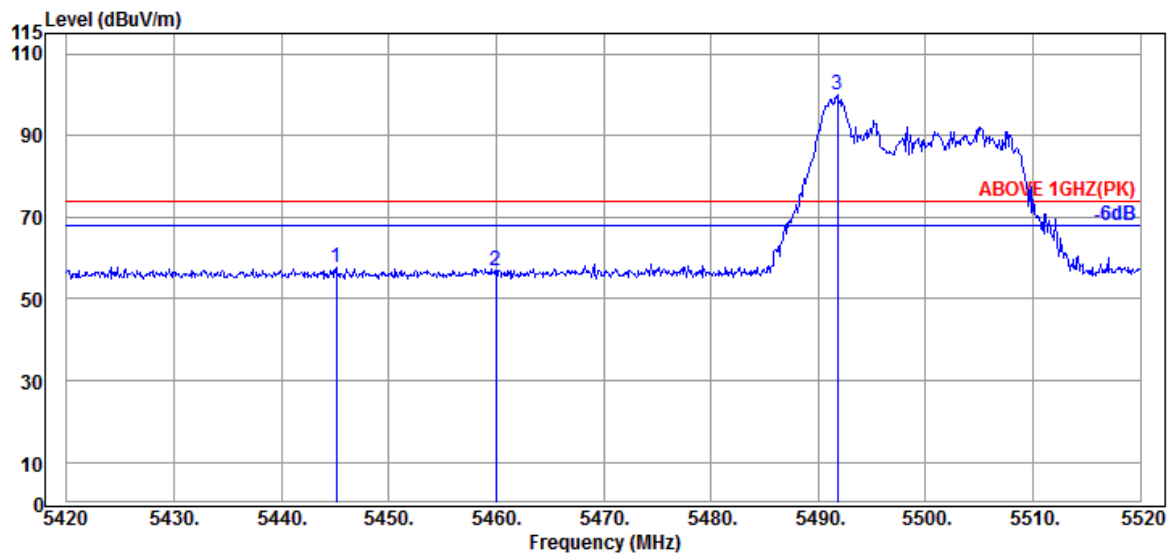

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5445.100	34.65	9.04	34.22	48.10	57.57	74.00	16.43	Peak
5460.000	34.60	9.05	34.21	47.29	56.73	74.00	17.27	Peak
@ 5491.800	34.67	9.07	34.20	90.30	99.84	---	---	Peak

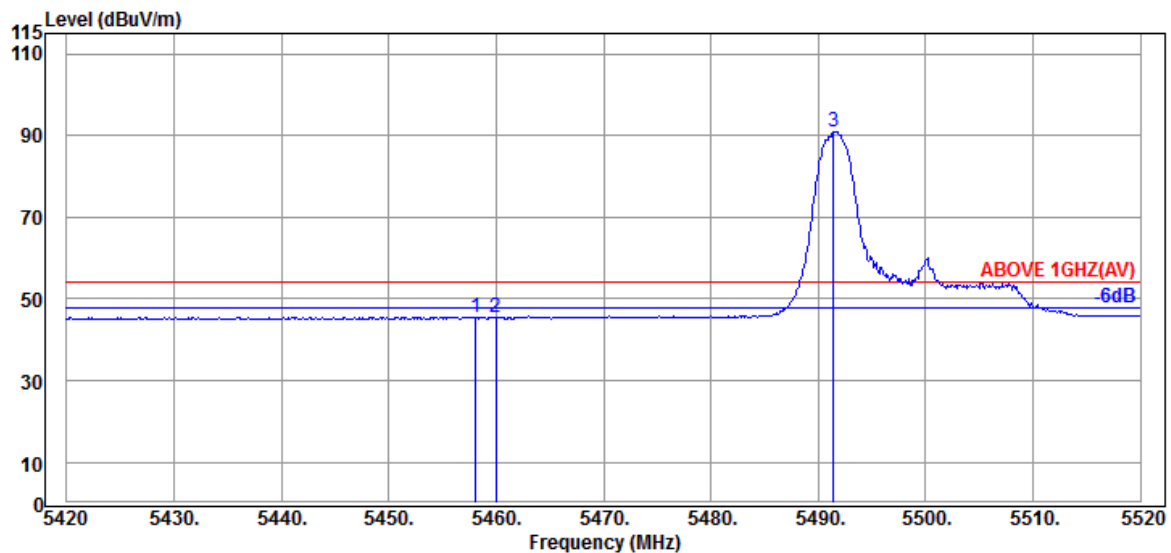

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.100	34.60	9.05	34.21	36.11	45.55	54.00	8.45	Average
5460.000	34.60	9.05	34.21	35.81	45.25	54.00	8.75	Average
@ 5491.400	34.67	9.07	34.20	81.49	91.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

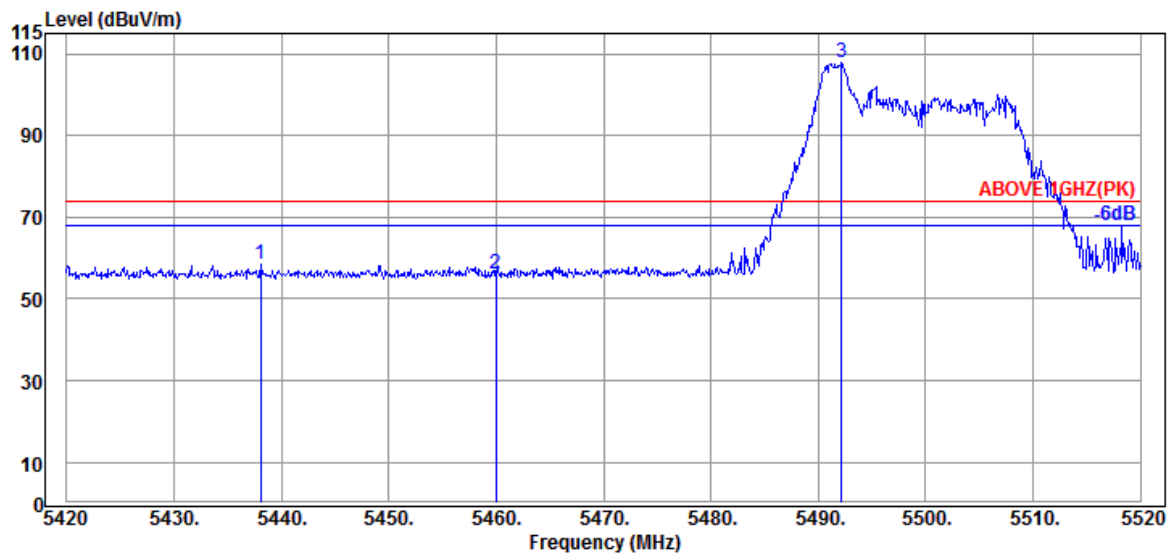

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5438.100	34.65	9.04	34.22	48.86	58.33	74.00	15.67	Peak
5460.000	34.60	9.05	34.21	46.77	56.21	74.00	17.79	Peak
@ 5492.200	34.67	9.07	34.20	98.15	107.69	---	---	Peak

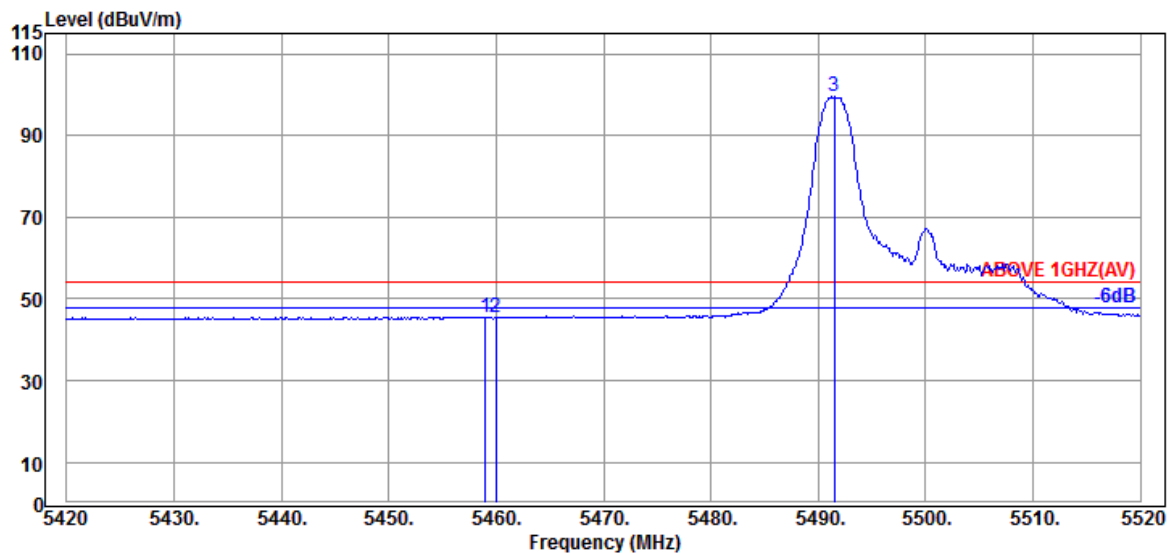

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.000	34.60	9.05	34.21	36.10	45.54	54.00	8.46	Average
5460.000	34.60	9.05	34.21	35.83	45.27	54.00	8.73	Average
@ 5491.500	34.67	9.07	34.20	89.97	99.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

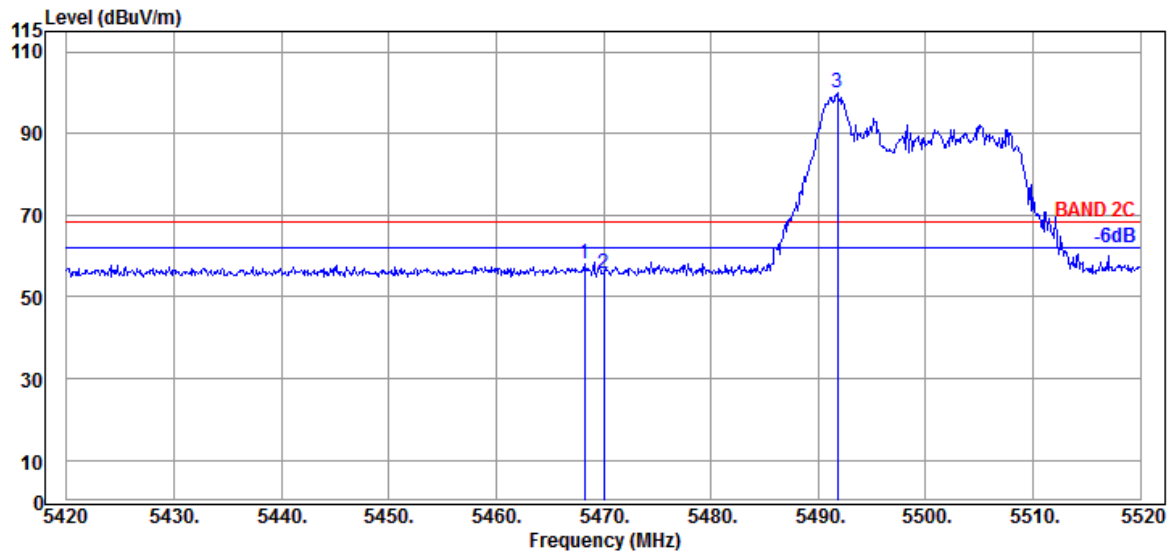

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.63	9.06	34.21	48.66	58.14	68.20	10.06	Peak
5470.000	34.63	9.06	34.21	46.27	55.75	68.20	12.45	Peak
@ 5491.800	34.67	9.07	34.20	90.30	99.84	---	---	Peak

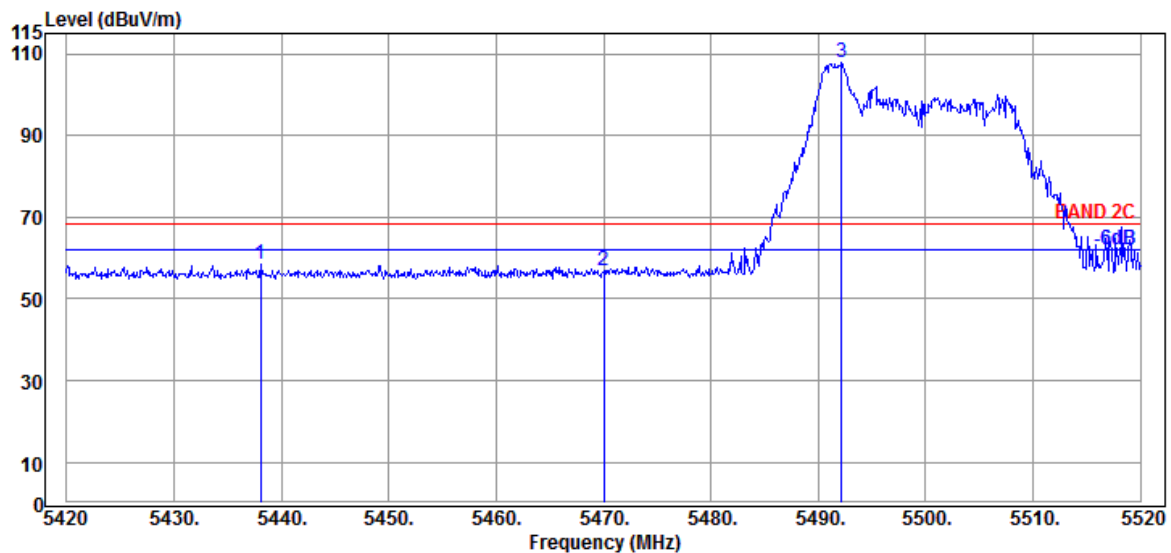

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.100	34.65	9.04	34.22	48.86	58.33	68.20	9.87	Peak
5470.000	34.63	9.06	34.21	47.43	56.91	68.20	11.29	Peak
@ 5492.200	34.67	9.07	34.20	98.15	107.69	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

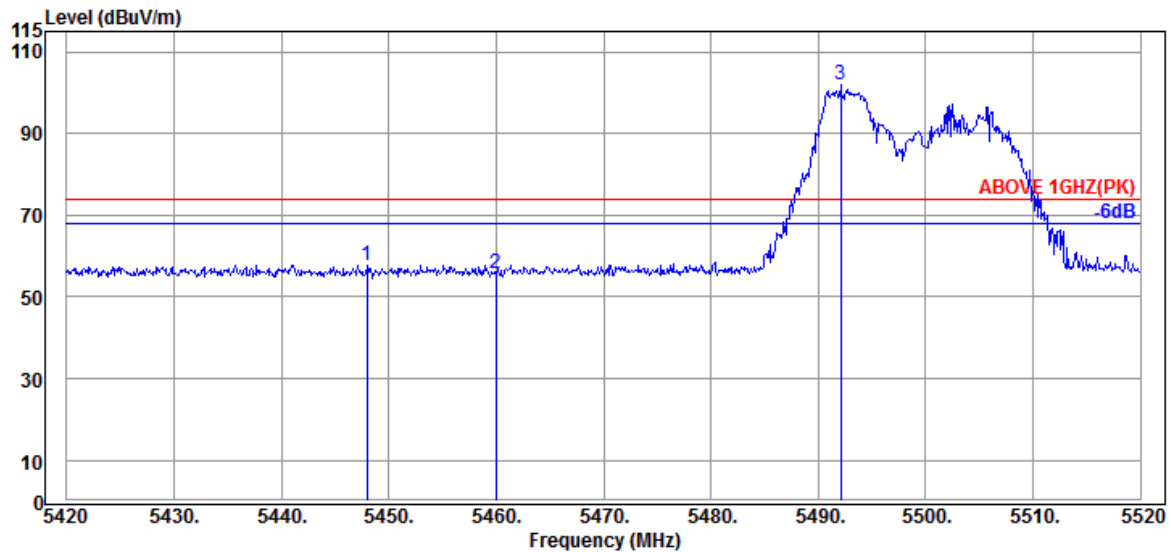

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.60	9.05	34.22	48.44	57.87	74.00	16.13	Peak
5460.000	34.60	9.05	34.21	46.13	55.57	74.00	18.43	Peak
@ 5492.100	34.67	9.07	34.20	92.26	101.80	---	---	Peak

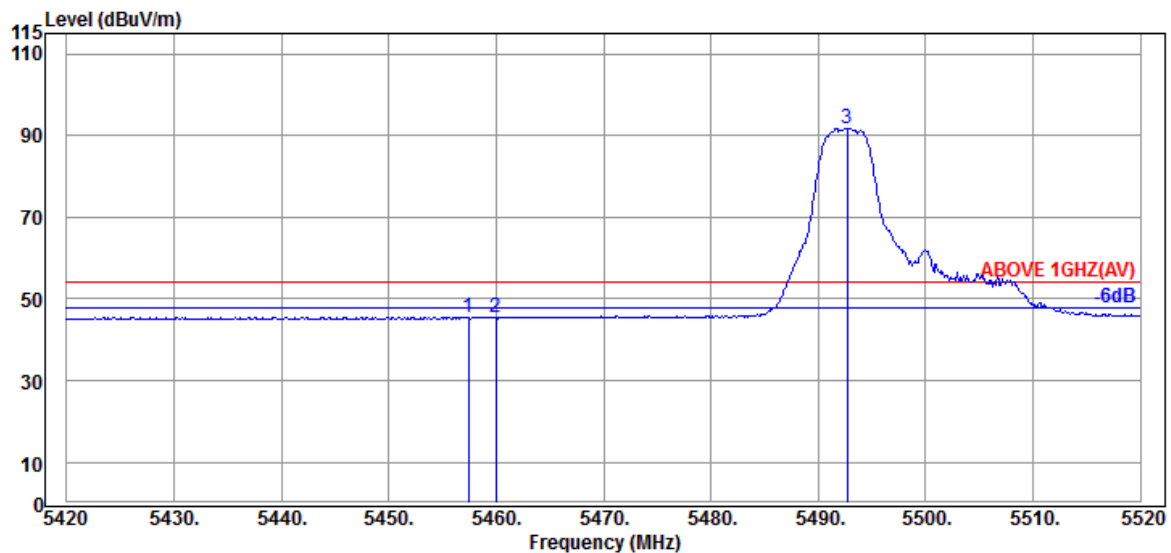

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.400	34.60	9.05	34.21	35.99	45.43	54.00	8.57	Average
5460.000	34.60	9.05	34.21	35.93	45.37	54.00	8.63	Average
@ 5492.700	34.67	9.07	34.20	82.33	91.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

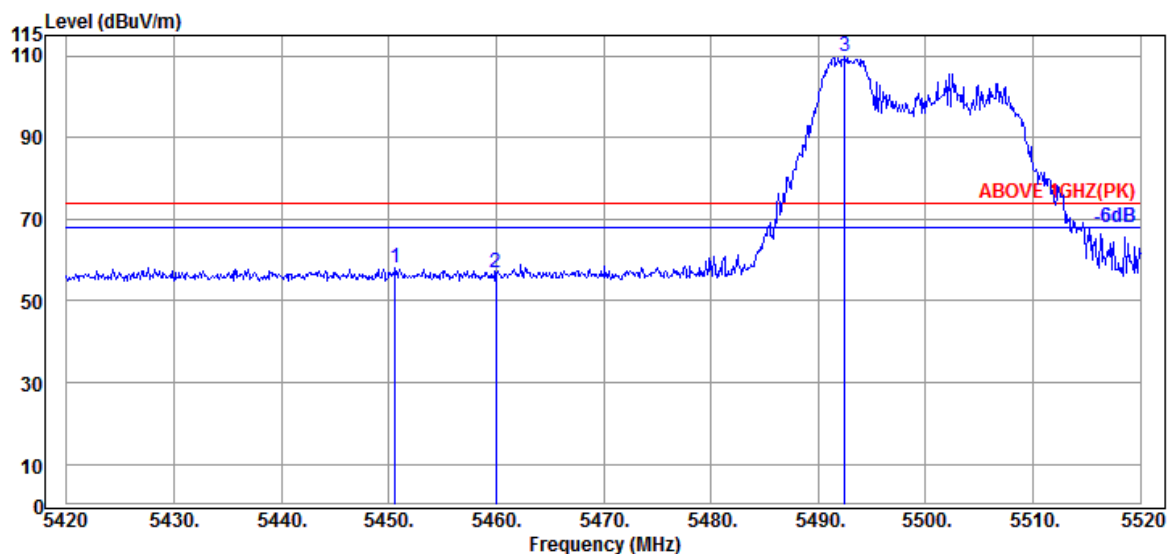

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.600	34.60	9.05	34.22	48.73	58.16	74.00	15.84	Peak
5460.000	34.60	9.05	34.21	47.37	56.81	74.00	17.19	Peak
@ 5492.500	34.67	9.07	34.20	100.40	109.94	---	---	Peak

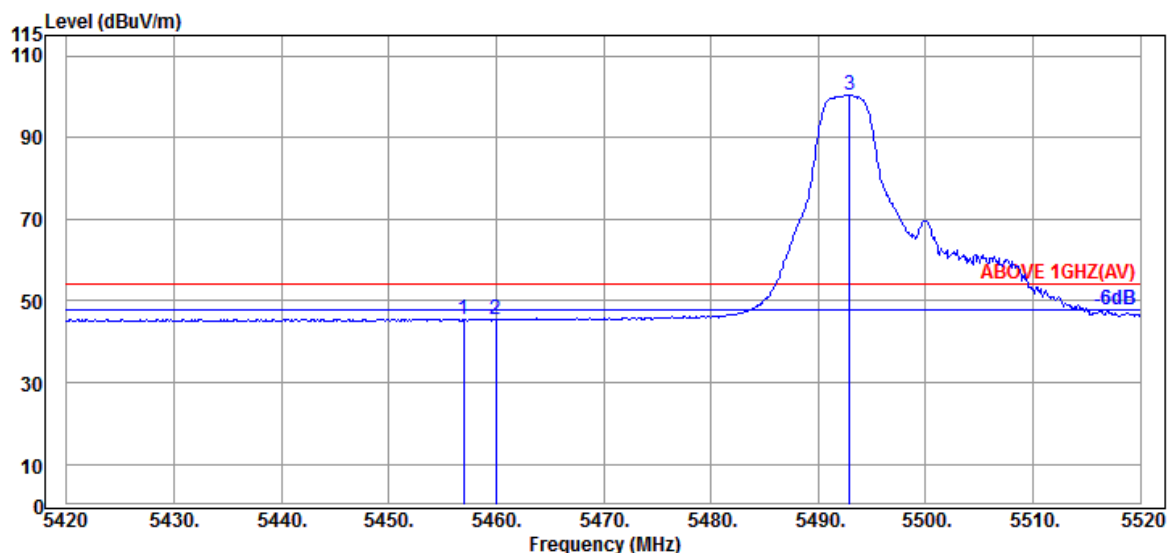

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.000	34.60	9.05	34.21	36.10	45.54	54.00	8.46	Average
5460.000	34.60	9.05	34.21	36.05	45.49	54.00	8.51	Average
@ 5492.900	34.67	9.07	34.20	90.89	100.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

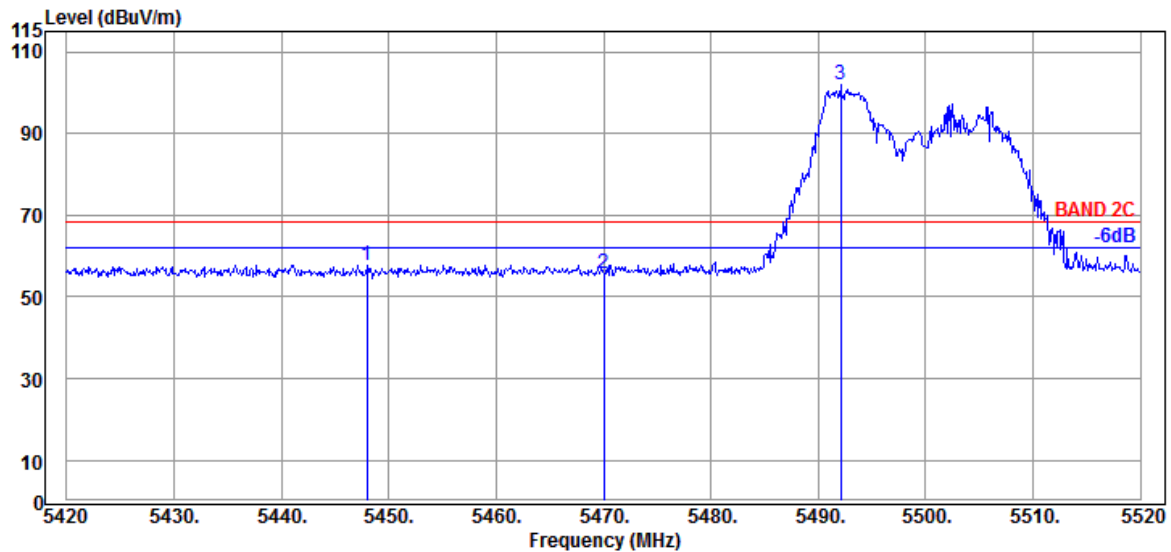

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.60	9.05	34.22	48.44	57.87	68.20	10.33	Peak
5470.000	34.63	9.06	34.21	46.33	55.81	68.20	12.39	Peak
@ 5492.100	34.67	9.07	34.20	92.26	101.80	---	---	Peak

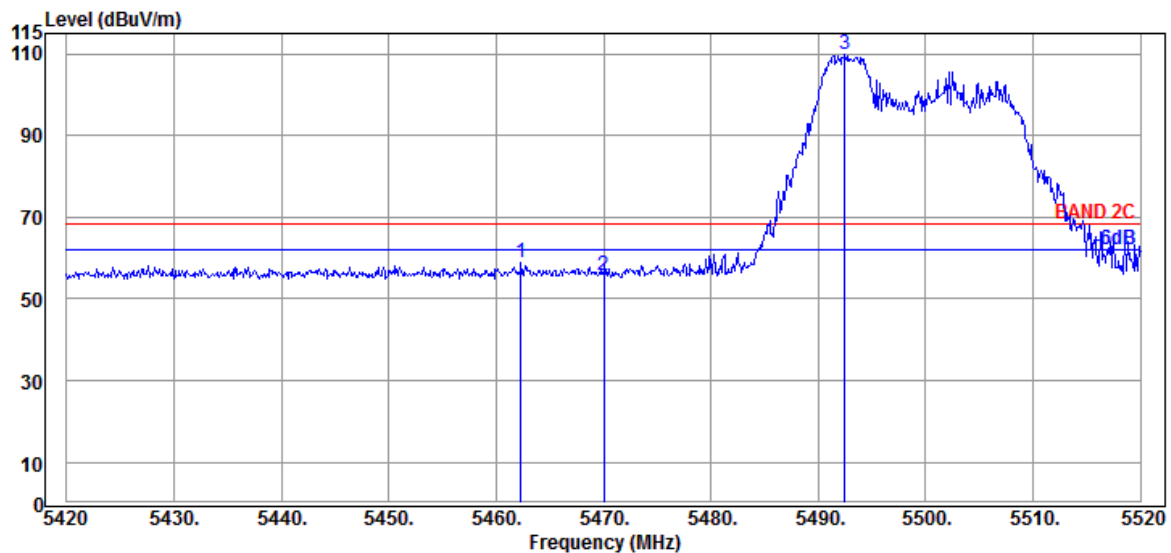

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.60	9.05	34.21	49.38	58.82	68.20	9.38	Peak
5470.000	34.63	9.06	34.21	46.06	55.54	68.20	12.66	Peak
@ 5492.500	34.67	9.07	34.20	100.40	109.94	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

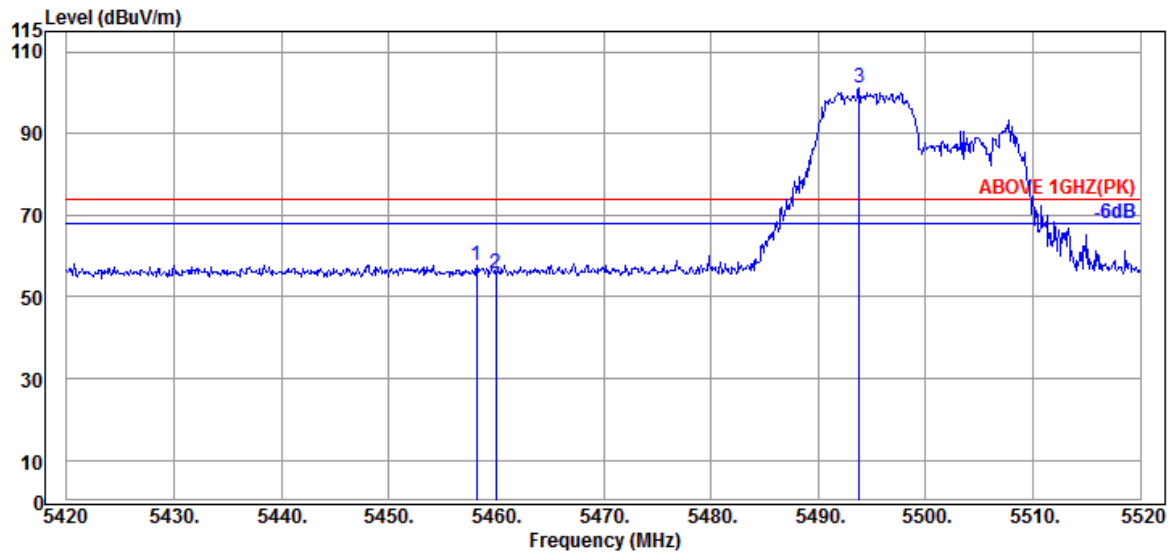

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.200	34.60	9.05	34.21	48.34	57.78	74.00	16.22	Peak
5460.000	34.60	9.05	34.21	46.13	55.57	74.00	18.43	Peak
@ 5493.800	34.67	9.07	34.20	91.57	101.11	---	---	Peak

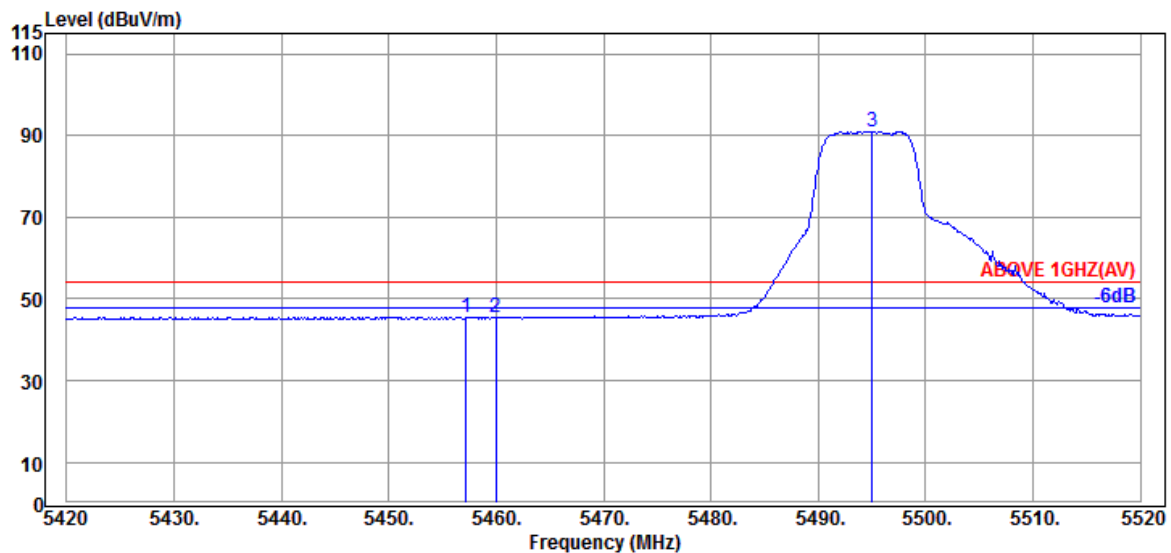

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.200	34.60	9.05	34.21	36.10	45.54	54.00	8.46	Average
5460.000	34.60	9.05	34.21	35.91	45.35	54.00	8.65	Average
@ 5495.000	34.67	9.07	34.20	81.52	91.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

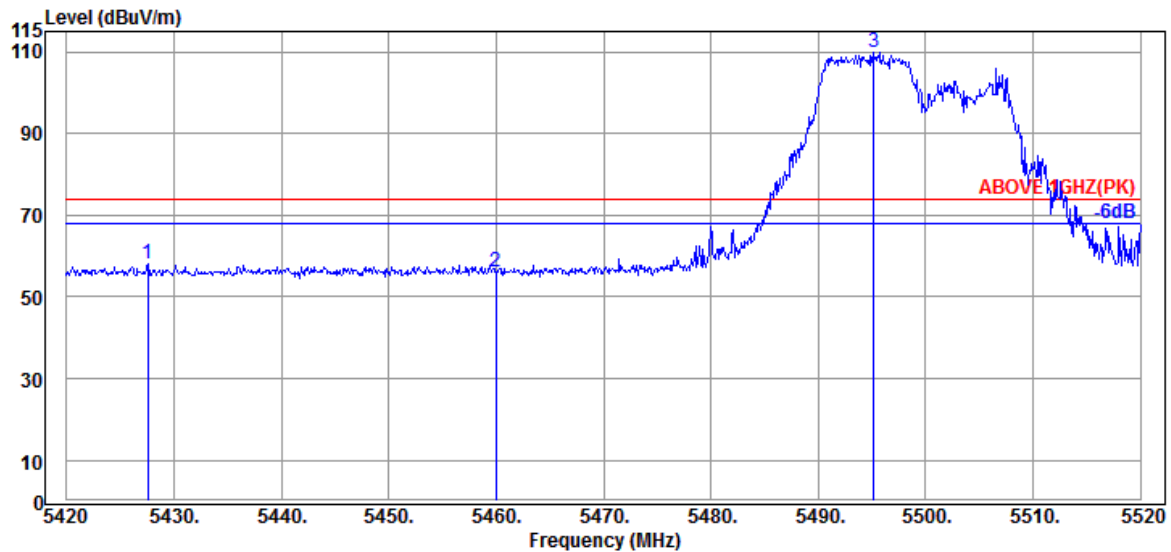

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.600	34.70	9.04	34.23	48.68	58.19	74.00	15.81	Peak
5460.000	34.60	9.05	34.21	46.81	56.25	74.00	17.75	Peak
@ 5495.200	34.70	9.08	34.20	100.20	109.78	---	---	Peak

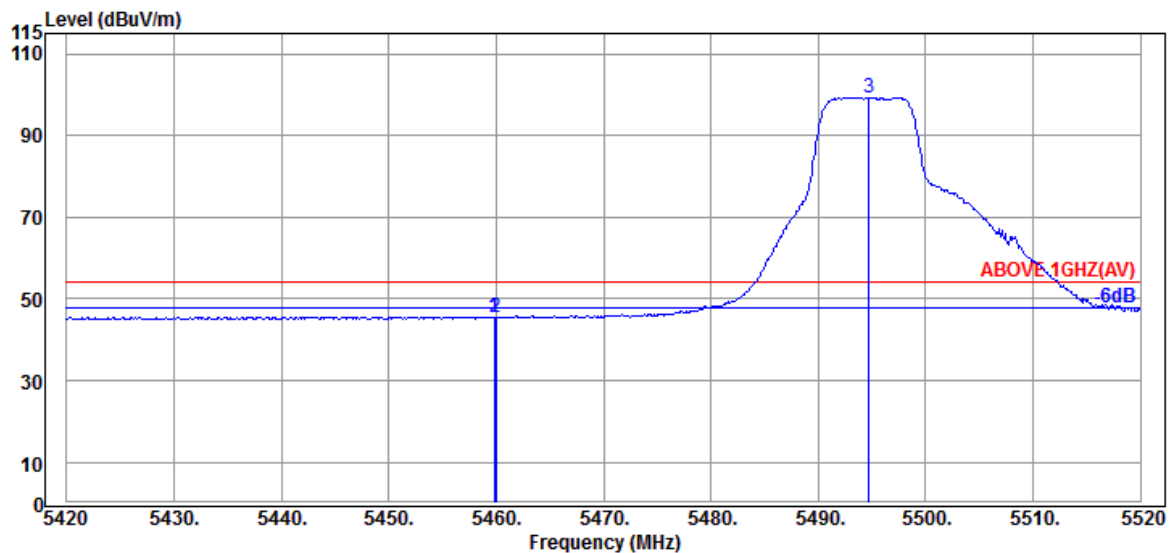

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.60	9.05	34.21	36.12	45.56	54.00	8.44	Average
5460.000	34.60	9.05	34.21	36.01	45.45	54.00	8.55	Average
@ 5494.700	34.67	9.07	34.20	89.82	99.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

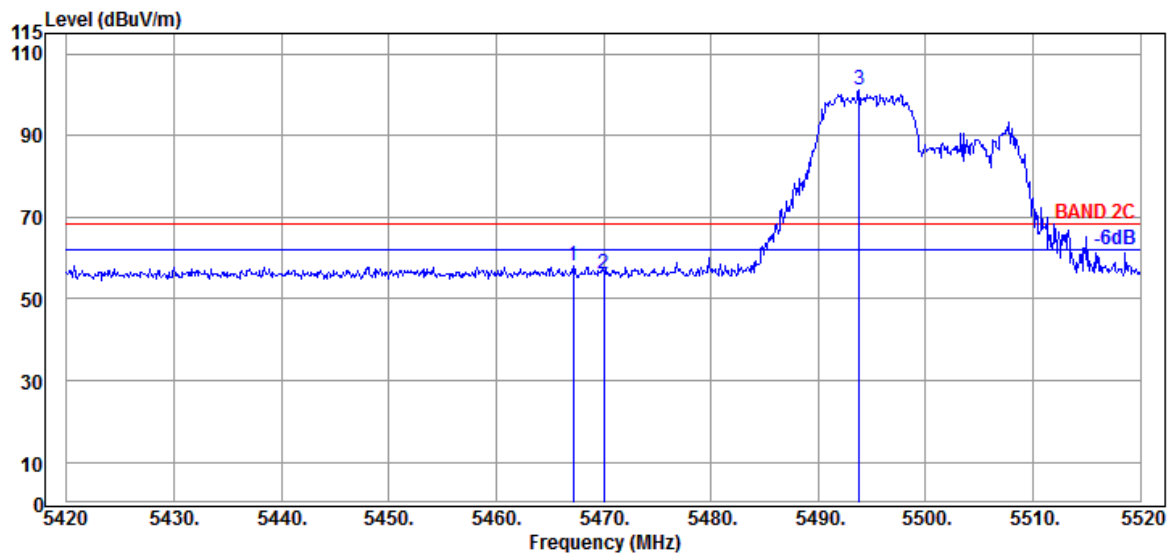

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.63	9.06	34.21	48.53	58.01	68.20	10.19	Peak
5470.000	34.63	9.06	34.21	46.63	56.11	68.20	12.09	Peak
@ 5493.800	34.67	9.07	34.20	91.57	101.11	---	---	Peak

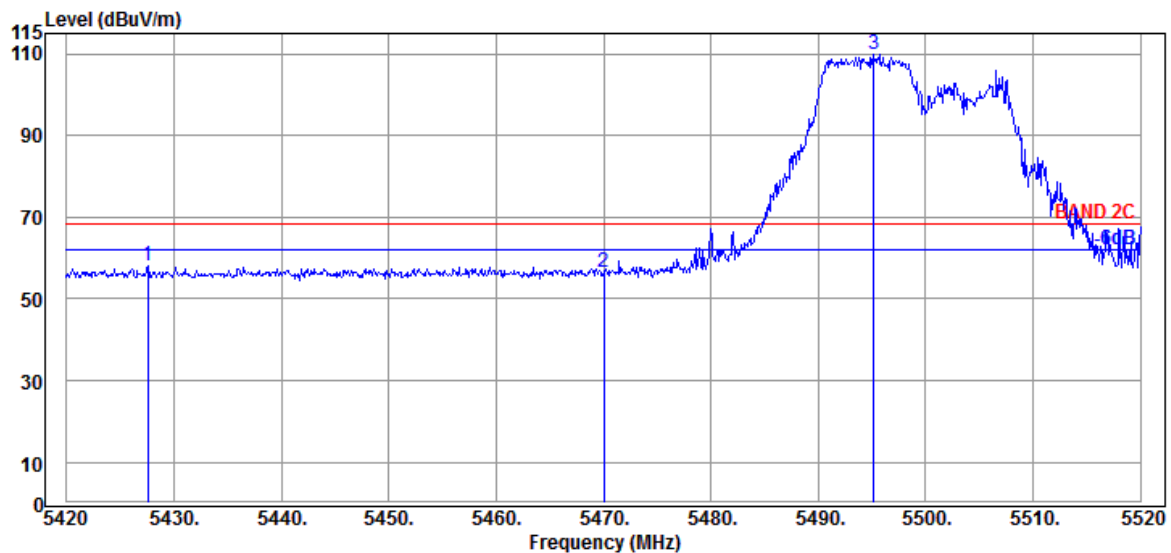

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.600	34.70	9.04	34.23	48.68	58.19	68.20	10.01	Peak
5470.000	34.63	9.06	34.21	46.95	56.43	68.20	11.77	Peak
@ 5495.200	34.70	9.08	34.20	100.20	109.78	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

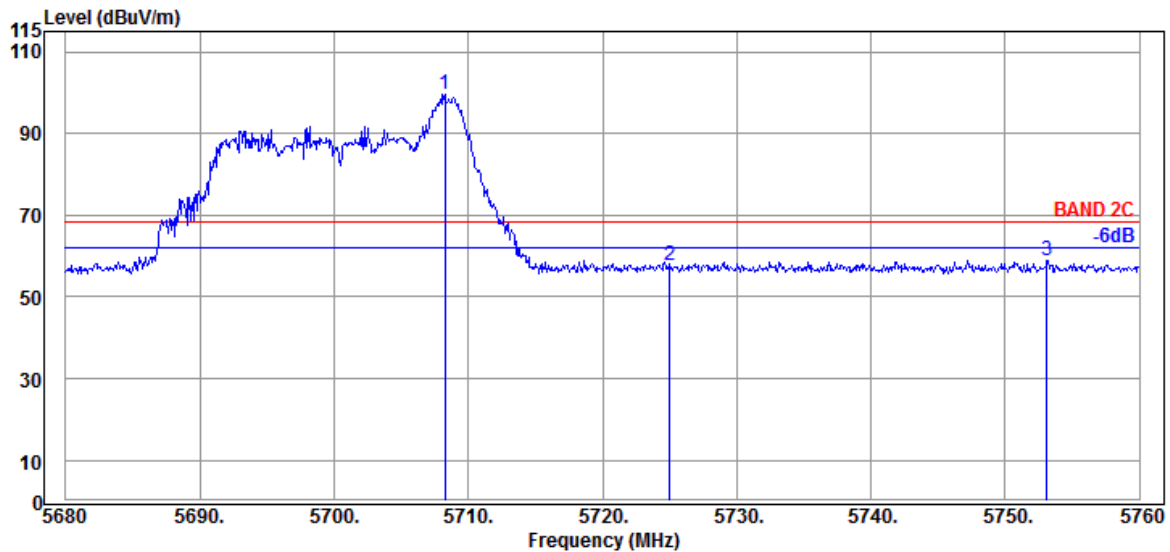

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.240	34.80	9.19	34.30	89.76	99.45	---	---	Peak
5725.040	34.90	9.20	34.30	47.78	57.58	68.20	10.62	Peak
5753.120	35.00	9.20	34.32	49.00	58.88	68.20	9.32	Peak

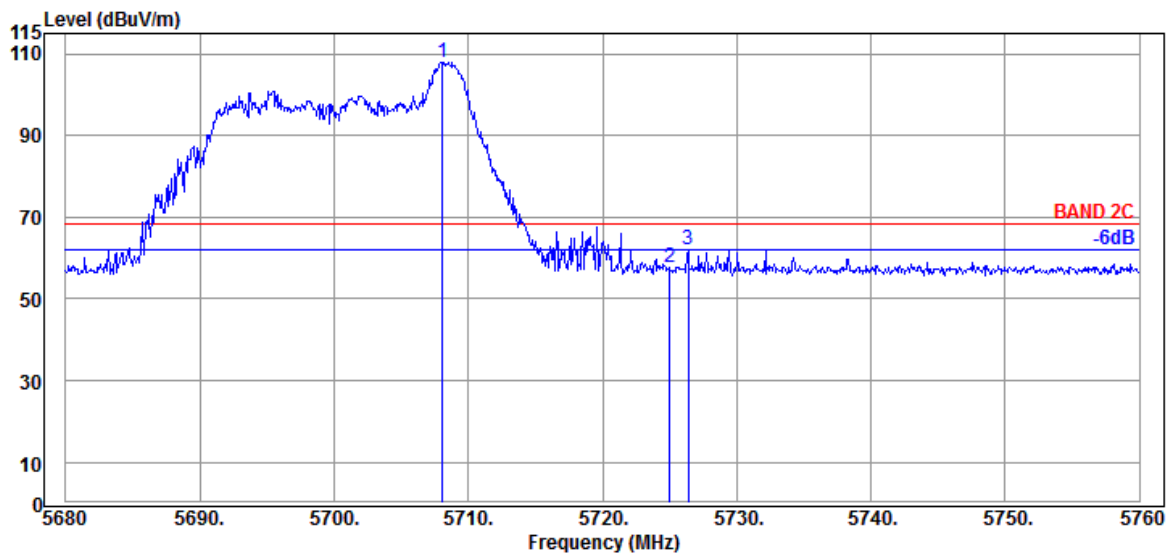

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.080	34.80	9.19	34.30	98.37	108.06	---	---	Peak
5725.040	34.90	9.20	34.30	47.86	57.66	68.20	10.54	Peak
5726.400	34.90	9.20	34.31	52.31	62.10	68.20	6.10	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

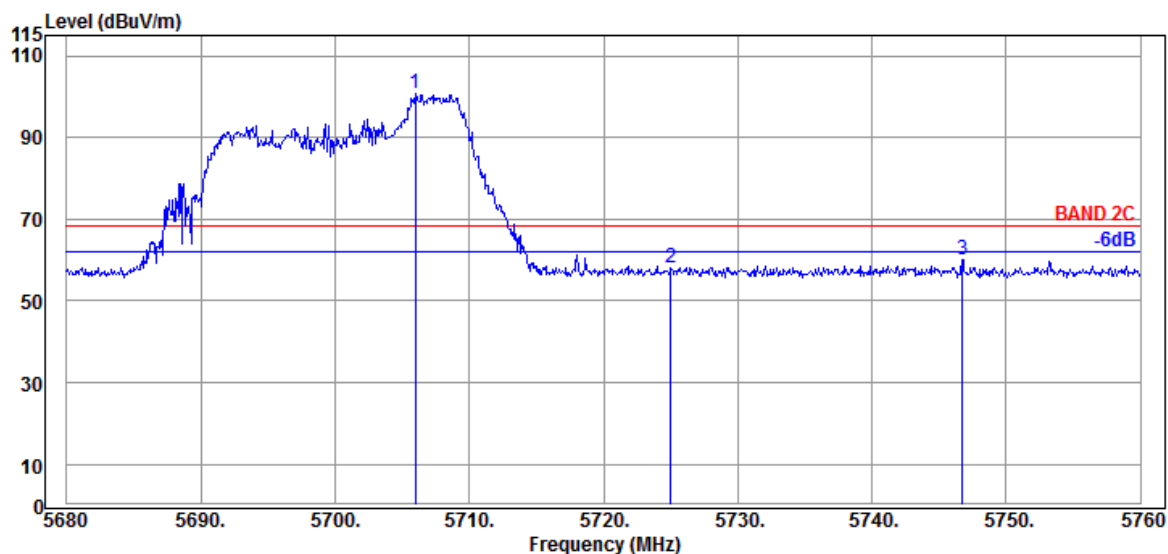

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.000	34.80	9.19	34.29	90.97	100.67	---	---	Peak
5725.040	34.90	9.20	34.30	48.32	58.12	68.20	10.08	Peak
5746.720	35.00	9.20	34.32	50.19	60.07	68.20	8.13	Peak

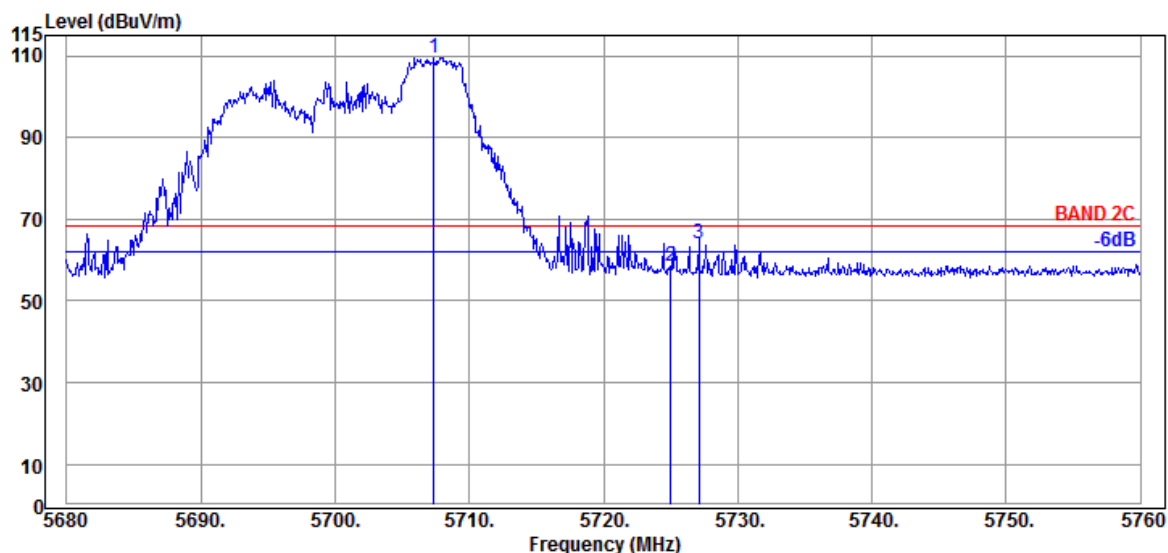

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.360	34.80	9.19	34.29	99.94	109.64	---	---	Peak
5725.040	34.90	9.20	34.30	48.57	58.37	68.20	9.83	Peak
5727.120	34.90	9.20	34.31	54.27	64.06	68.20	4.14	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

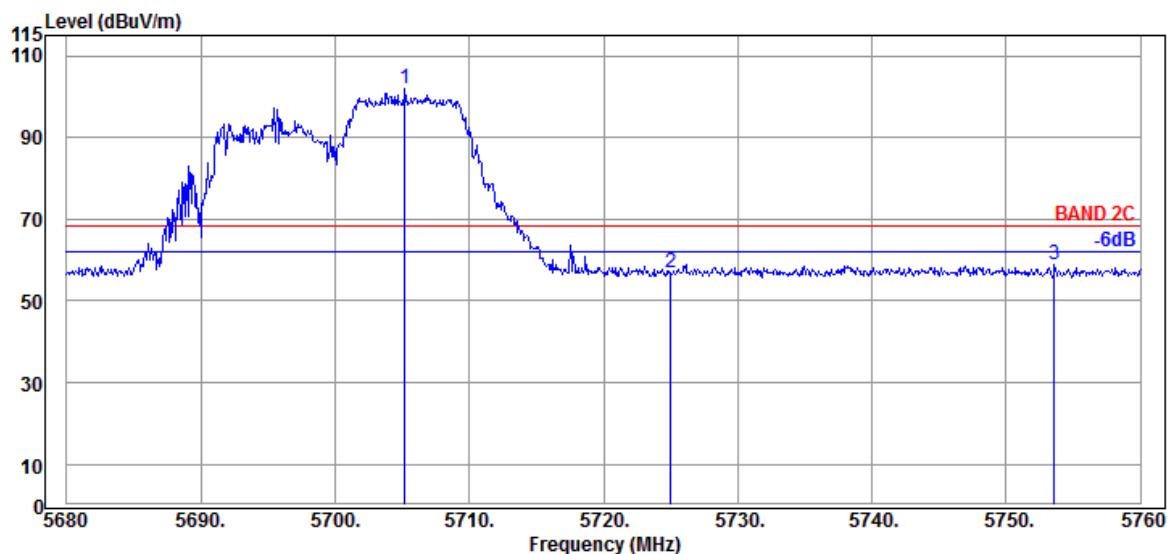

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.200	34.70	9.18	34.29	92.26	101.85	---	---	Peak
5725.040	34.90	9.20	34.30	47.08	56.88	68.20	11.32	Peak
5753.600	35.00	9.20	34.32	48.91	58.79	68.20	9.41	Peak

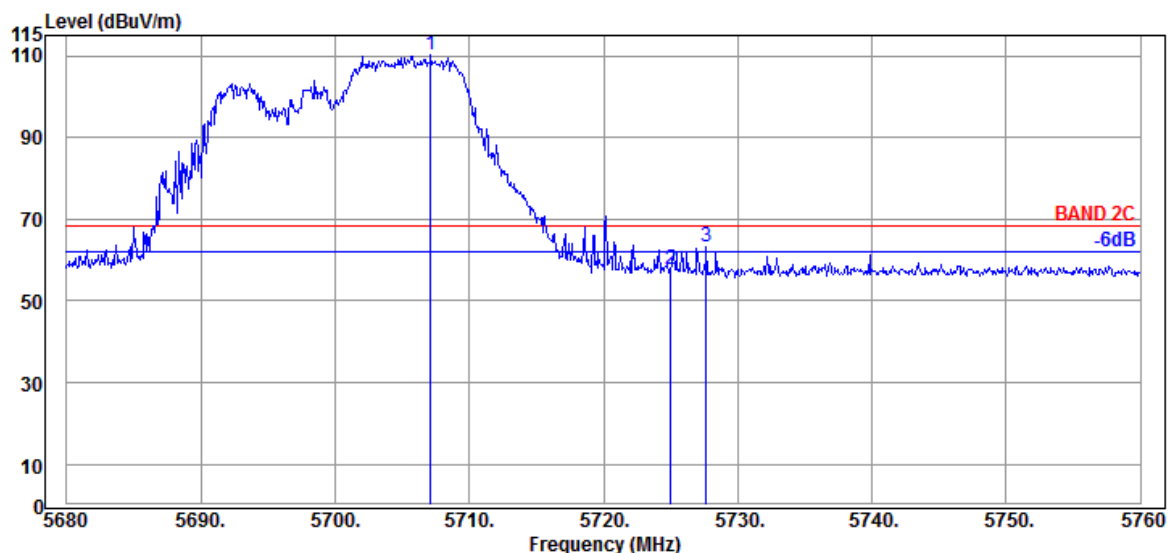

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.120	34.80	9.19	34.29	100.70	110.40	---	---	Peak
5725.040	34.90	9.20	34.30	47.96	57.76	68.20	10.44	Peak
5727.680	34.90	9.20	34.31	53.37	63.16	68.20	5.04	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

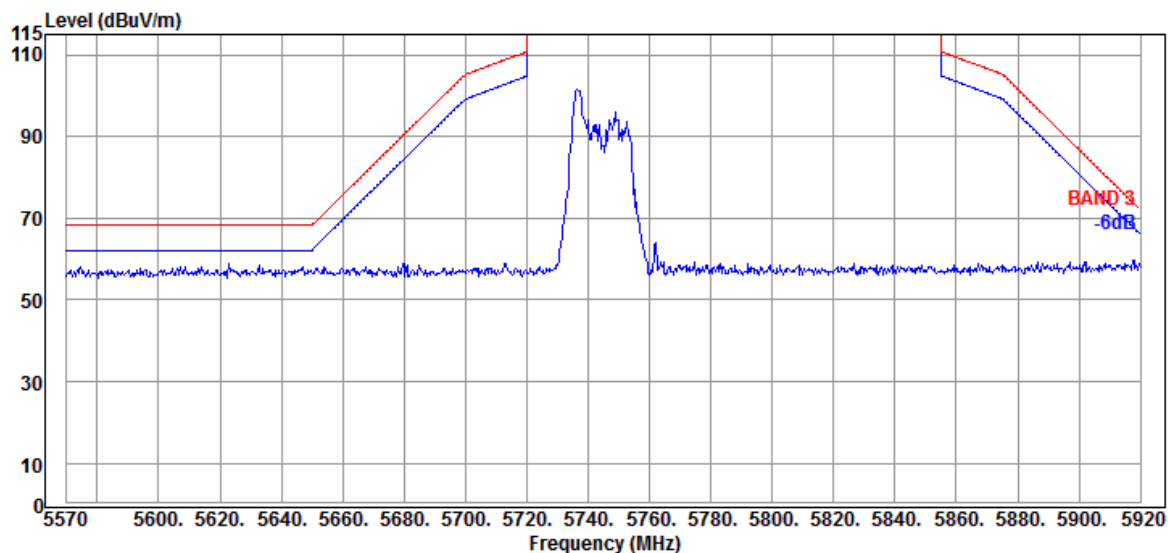


Antenna at Vertical Polarization

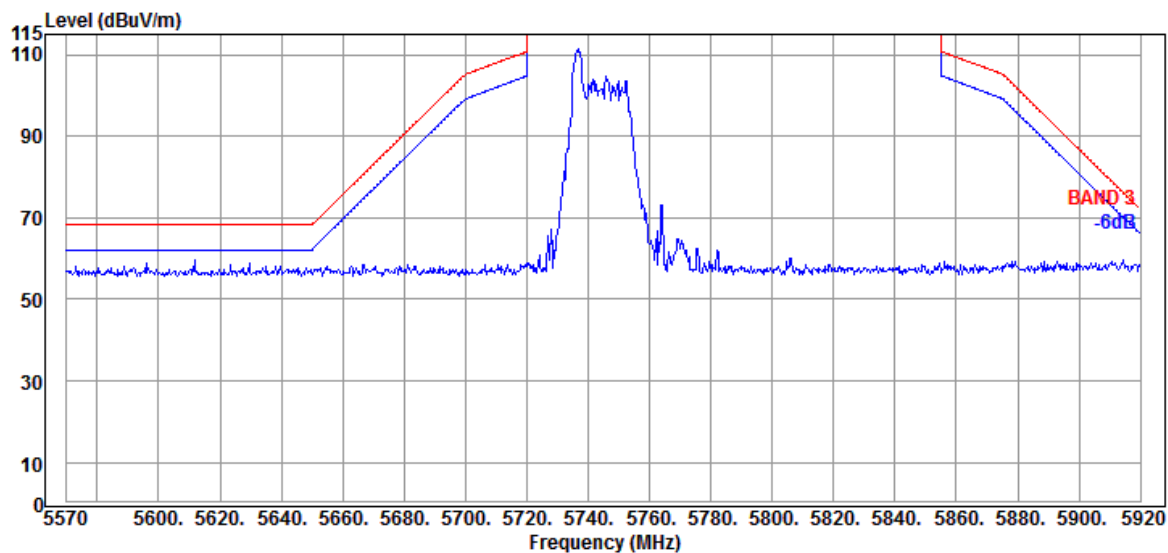


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

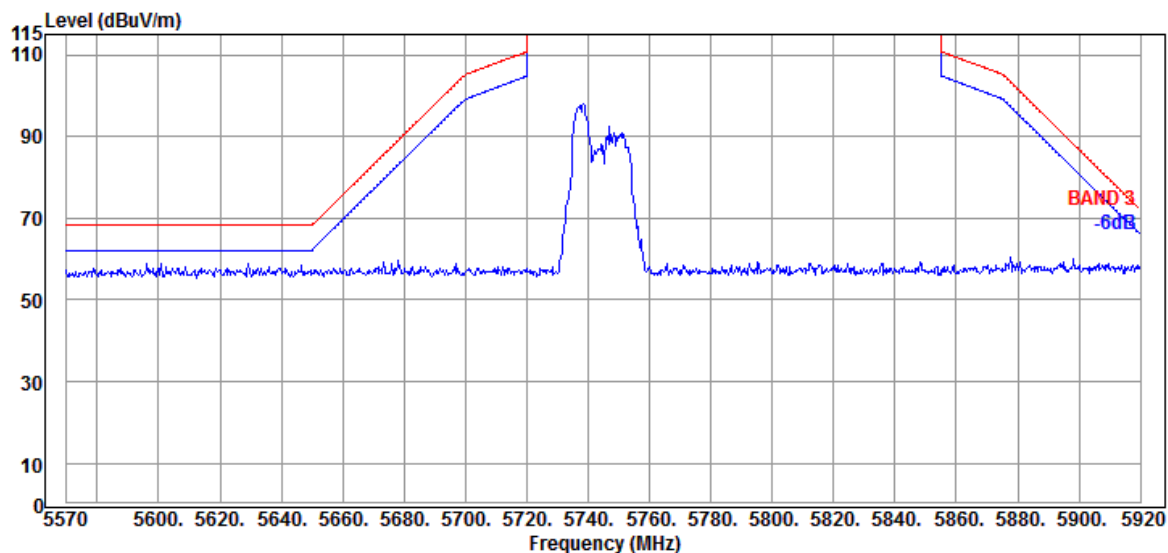

Antenna at Vertical Polarization

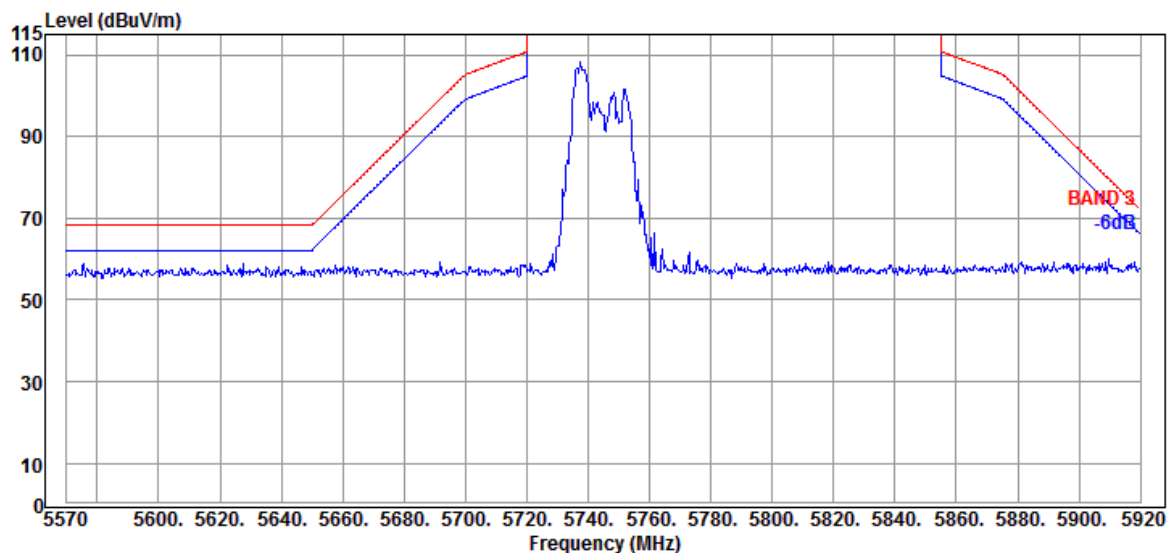


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

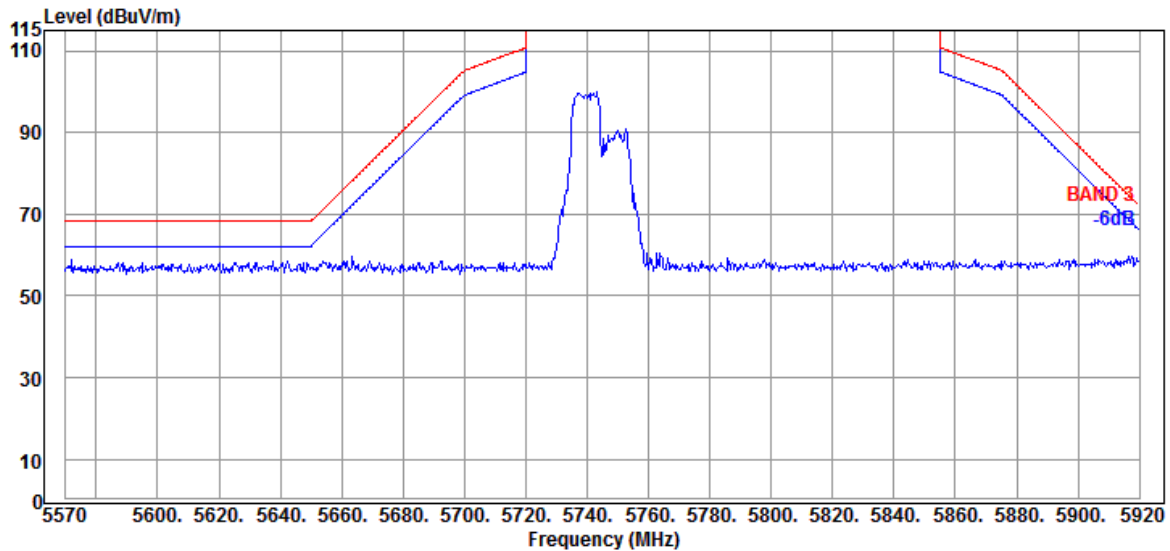

Antenna at Vertical Polarization

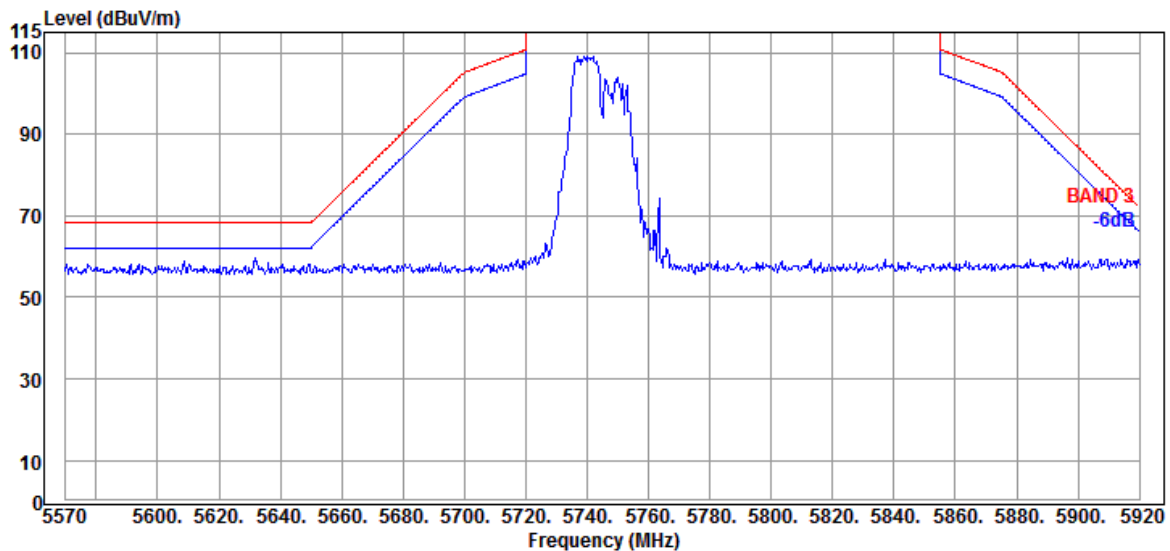


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

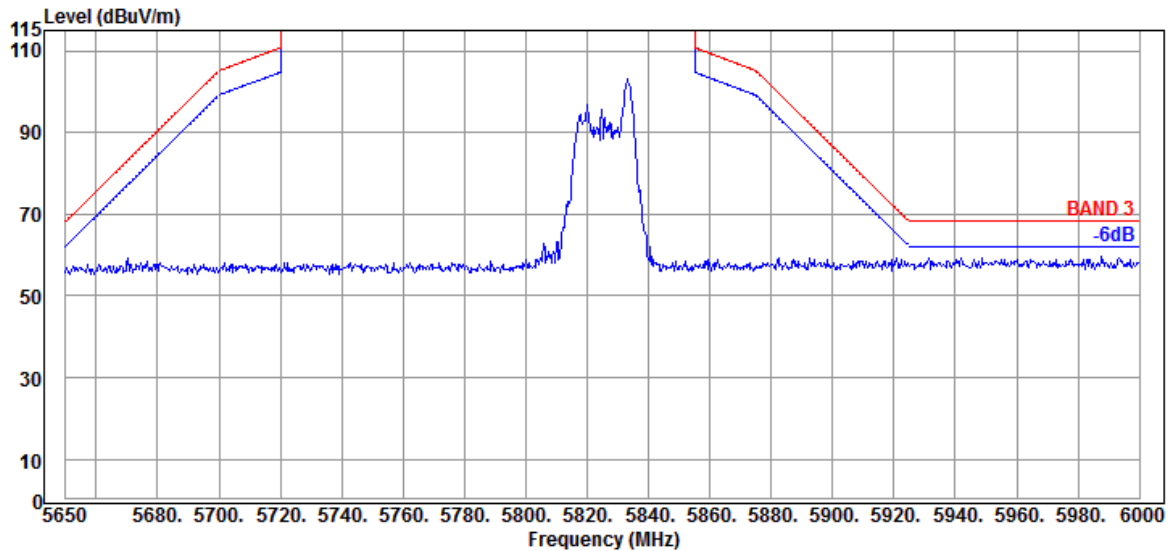

Antenna at Vertical Polarization

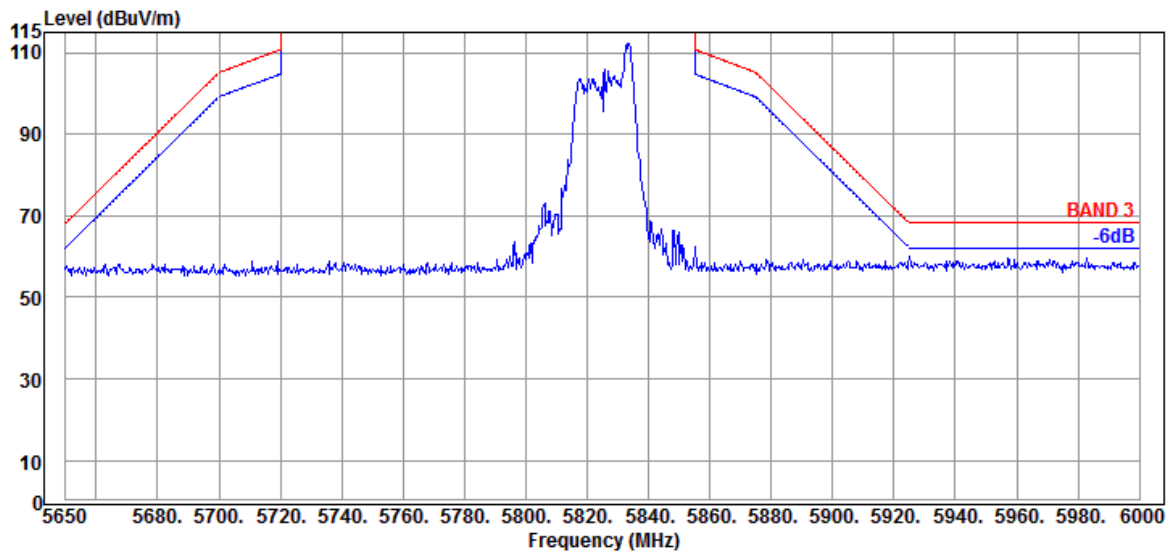


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

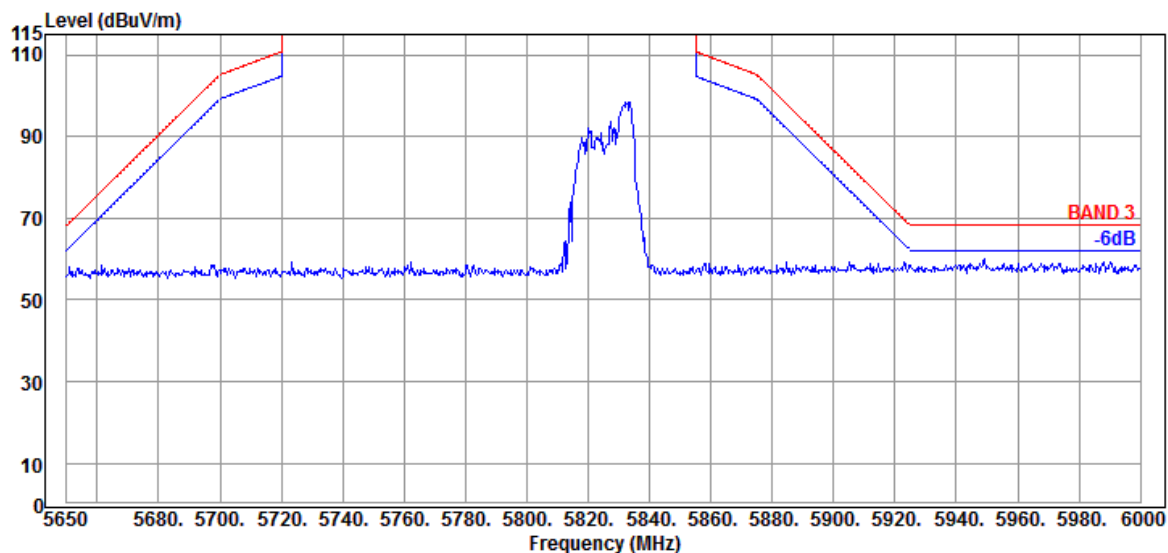

Antenna at Vertical Polarization

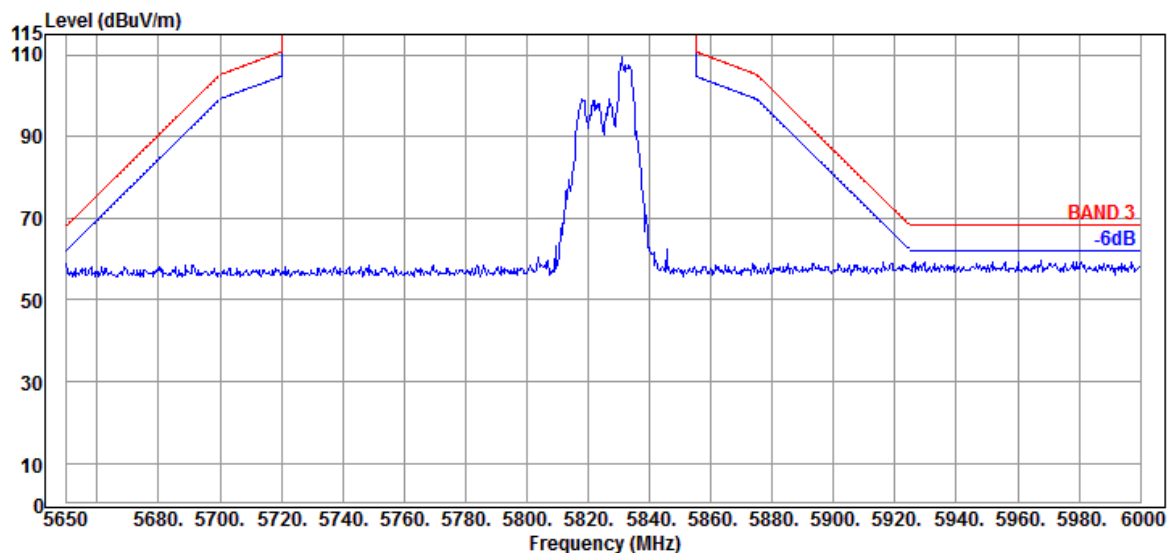


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

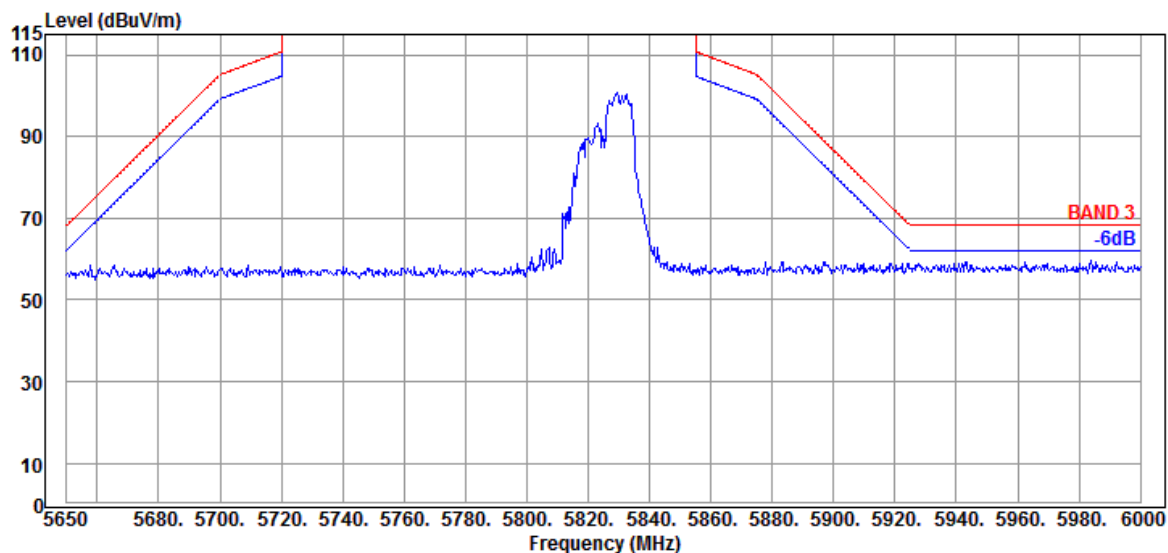

Antenna at Vertical Polarization

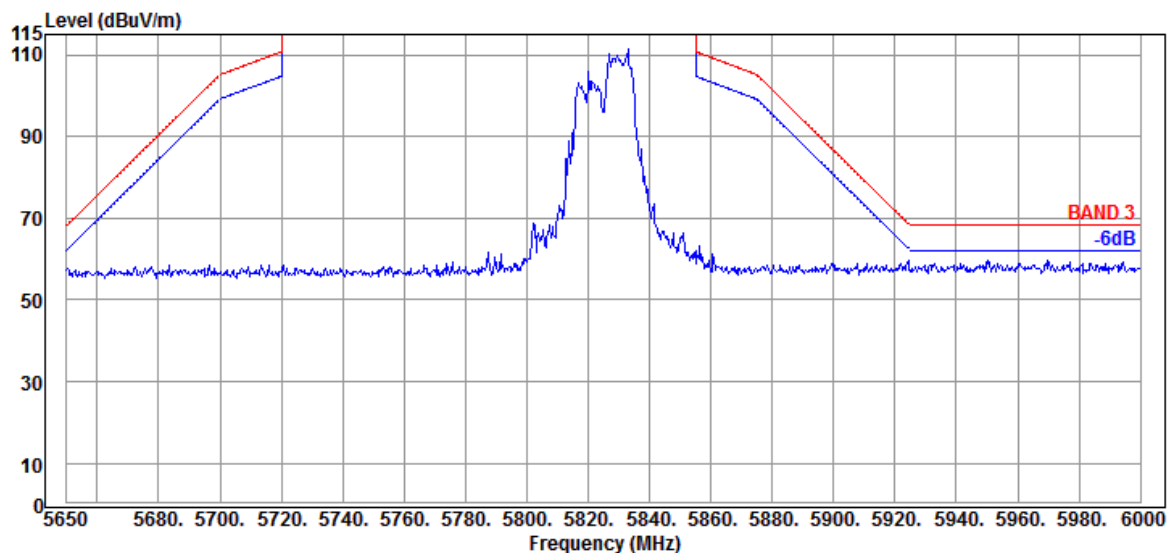

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

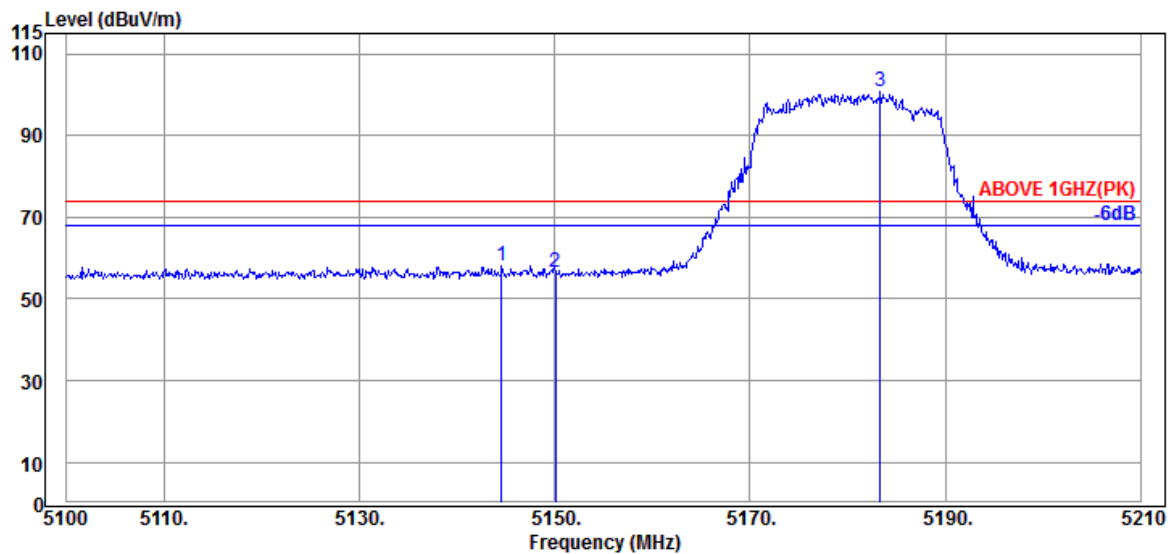

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.550	34.50	8.88	34.34	48.91	57.95	74.00	16.05	Peak
5150.050	34.50	8.88	34.34	47.40	56.44	74.00	17.56	Peak
@ 5183.380	34.63	8.90	34.32	91.59	100.80	---	---	Peak

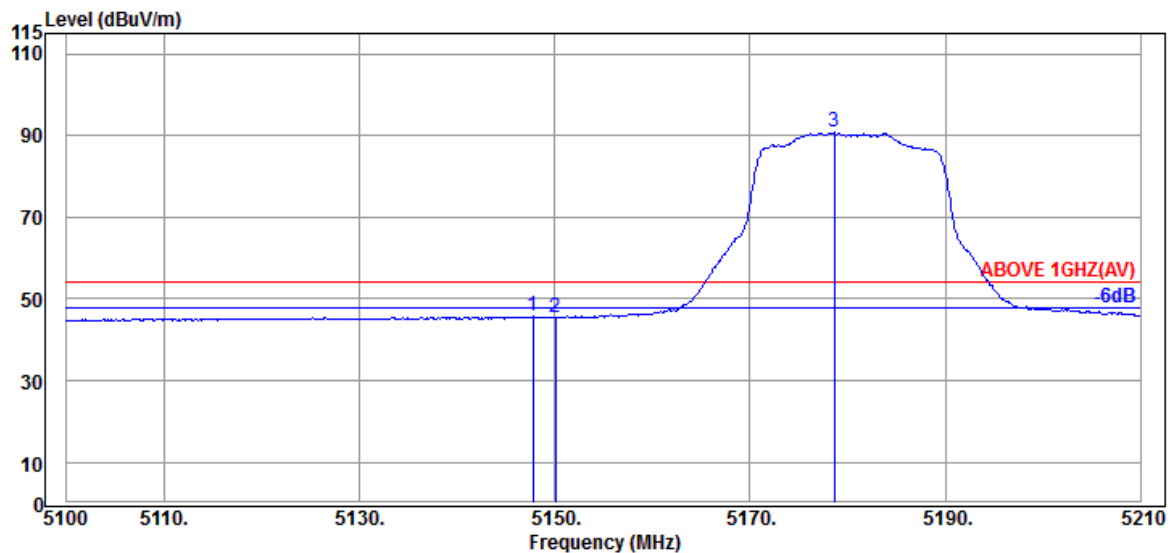

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.740	34.50	8.88	34.34	36.68	45.72	54.00	8.28	Average
5150.050	34.50	8.88	34.34	36.39	45.43	54.00	8.57	Average
@ 5178.650	34.63	8.90	34.32	81.50	90.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

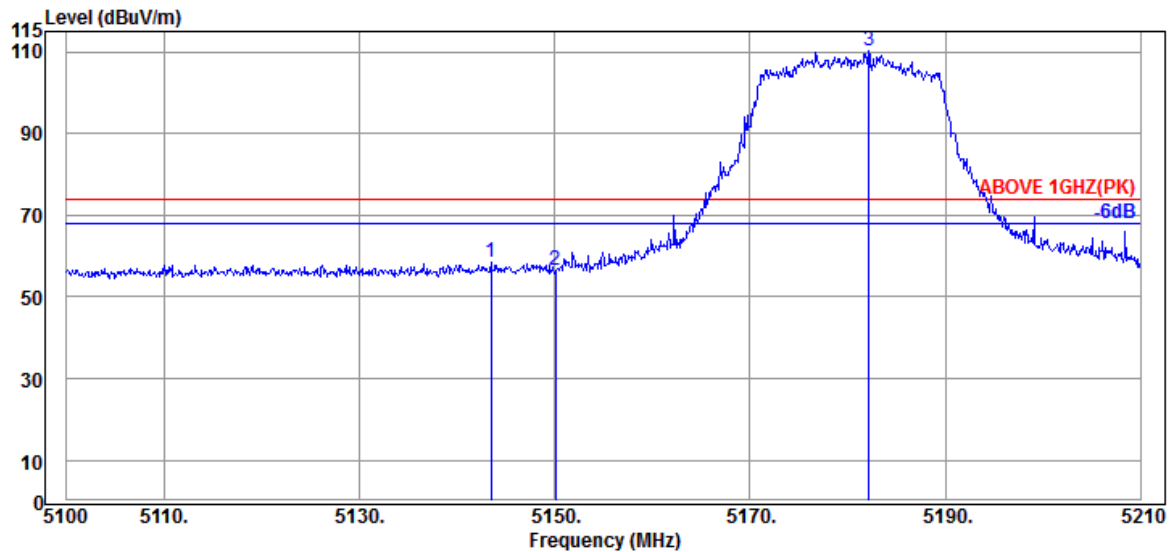

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.450	34.50	8.88	34.34	49.57	58.61	74.00	15.39	Peak
5150.050	34.50	8.88	34.34	47.56	56.60	74.00	17.40	Peak
@ 5182.170	34.63	8.90	34.32	100.92	110.13	---	---	Peak

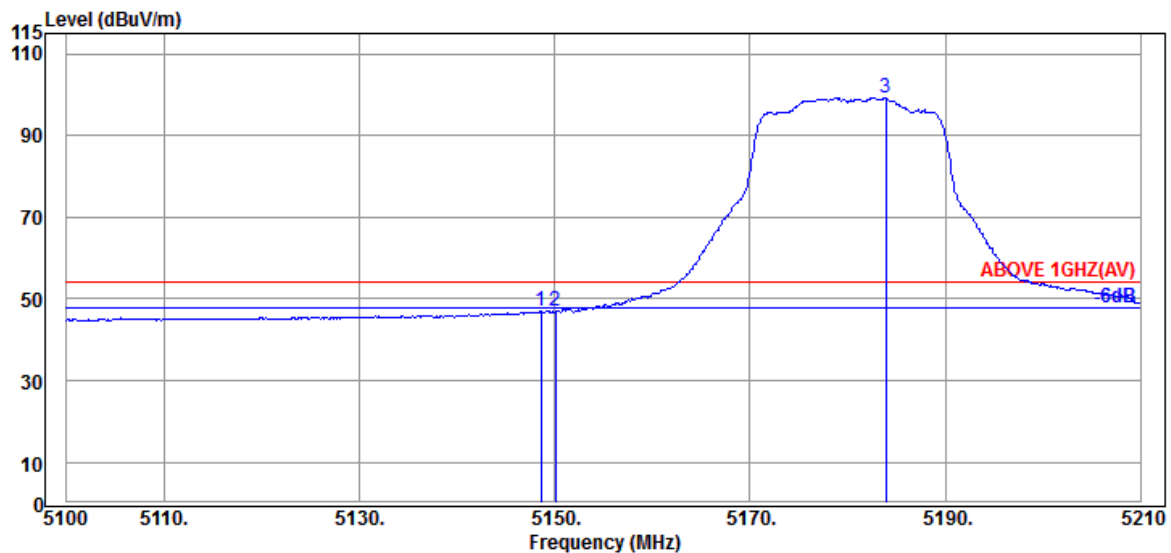

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.620	34.50	8.88	34.34	37.90	46.94	54.00	7.06	Average
5150.050	34.50	8.88	34.34	37.87	46.91	54.00	7.09	Average
@ 5183.930	34.63	8.90	34.32	90.11	99.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

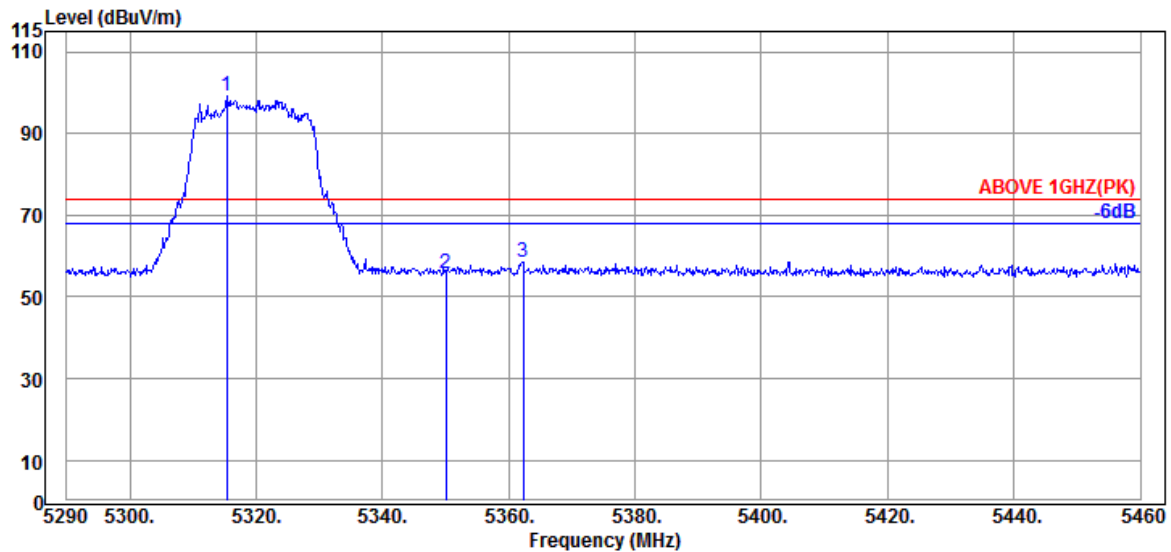

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.330	34.57	8.98	34.27	90.08	99.36	---	---	Peak
5350.010	34.90	8.99	34.26	46.17	55.80	74.00	18.20	Peak
5362.250	34.87	9.00	34.26	48.76	58.37	74.00	15.63	Peak

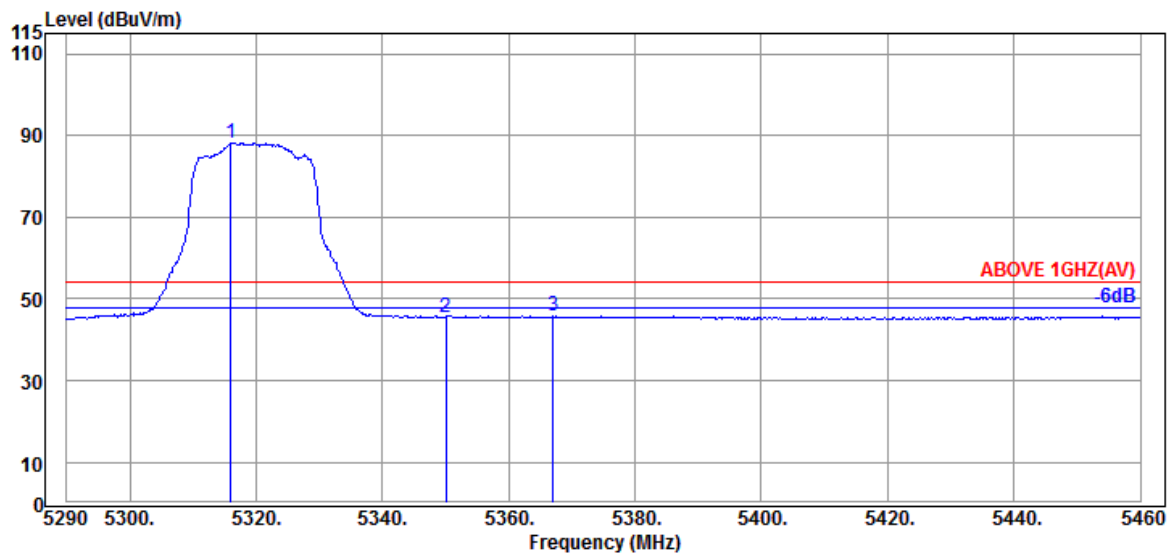

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.010	34.57	8.98	34.27	78.99	88.27	---	---	Average
5350.010	34.90	8.99	34.26	35.98	45.61	54.00	8.39	Average
5367.010	34.87	9.00	34.25	36.22	45.84	54.00	8.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

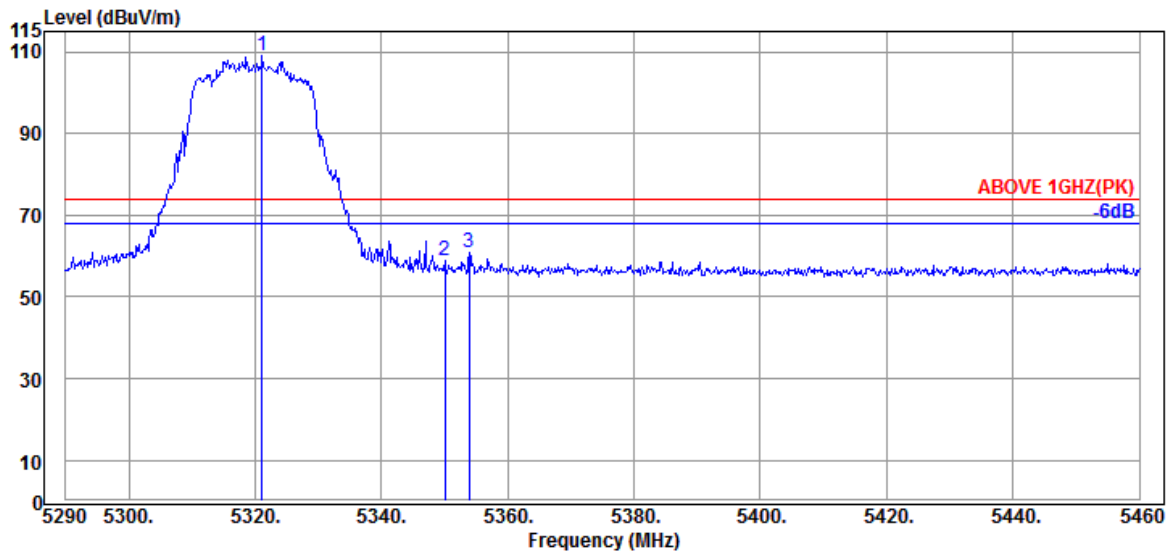

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.110	34.57	8.98	34.27	99.68	108.96	---	---	Peak
5350.010	34.90	8.99	34.26	49.30	58.93	74.00	15.07	Peak
5353.920	34.90	8.99	34.26	51.09	60.72	74.00	13.28	Peak

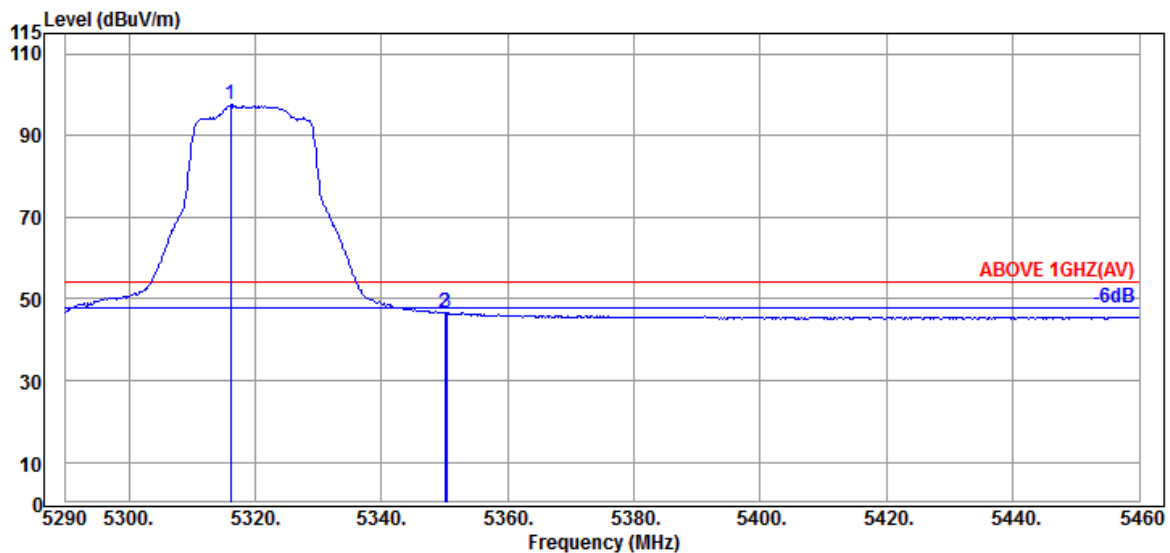

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.180	34.57	8.98	34.27	88.36	97.64	---	---	Average
5350.010	34.90	8.99	34.26	36.99	46.62	54.00	7.38	Average
5350.350	34.90	8.99	34.26	37.12	46.75	54.00	7.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

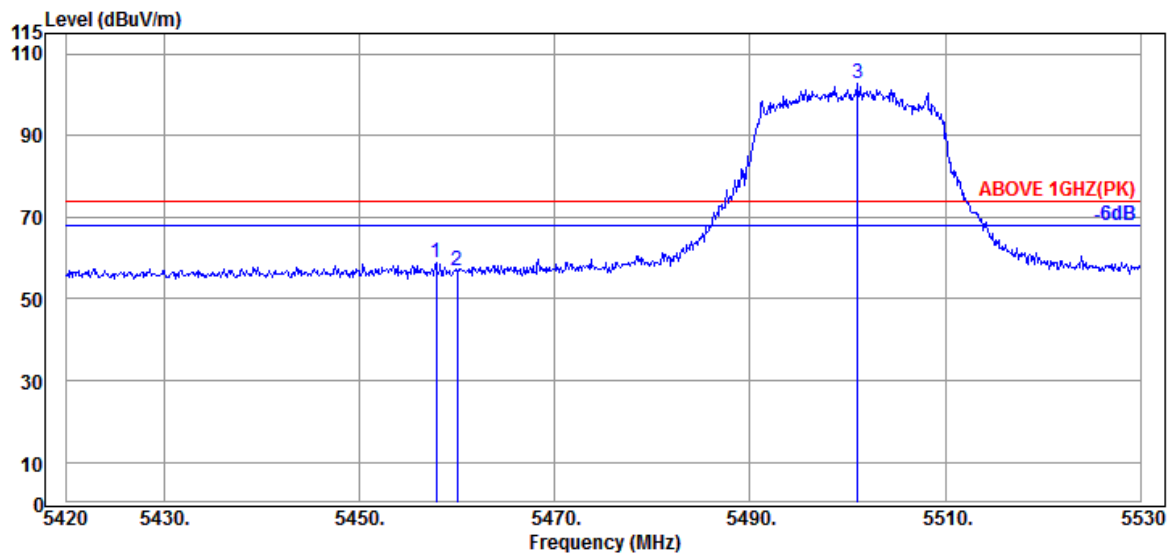

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.840	34.60	9.05	34.21	49.43	58.87	74.00	15.13	Peak
5460.040	34.60	9.05	34.21	47.65	57.09	74.00	16.91	Peak
@ 5501.070	34.70	9.08	34.20	93.28	102.86	---	---	Peak

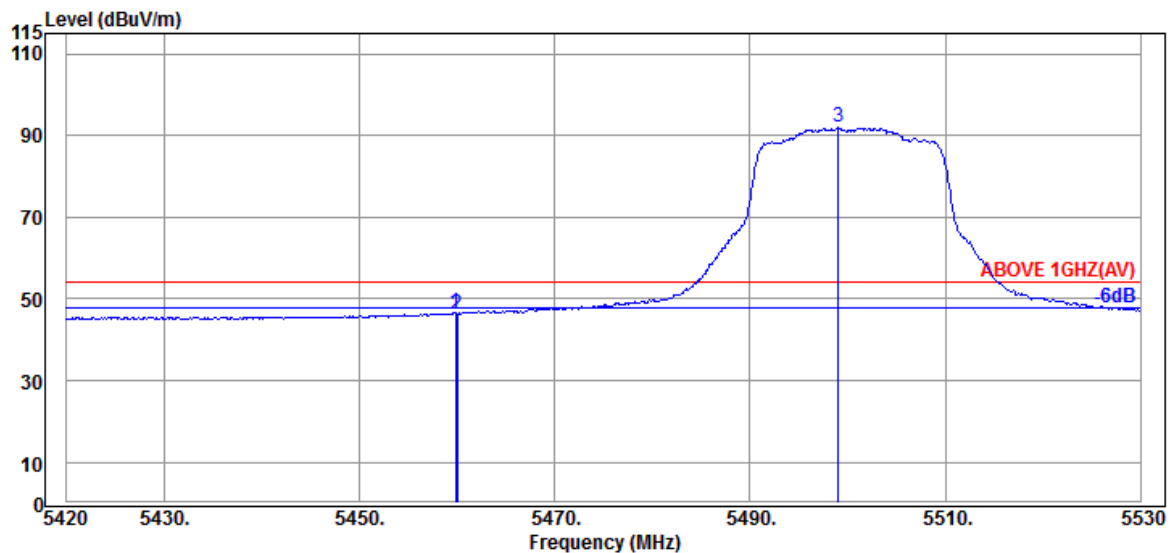

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.820	34.60	9.05	34.21	37.07	46.51	54.00	7.49	Average
5460.040	34.60	9.05	34.21	36.83	46.27	54.00	7.73	Average
@ 5499.090	34.70	9.08	34.20	82.32	91.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

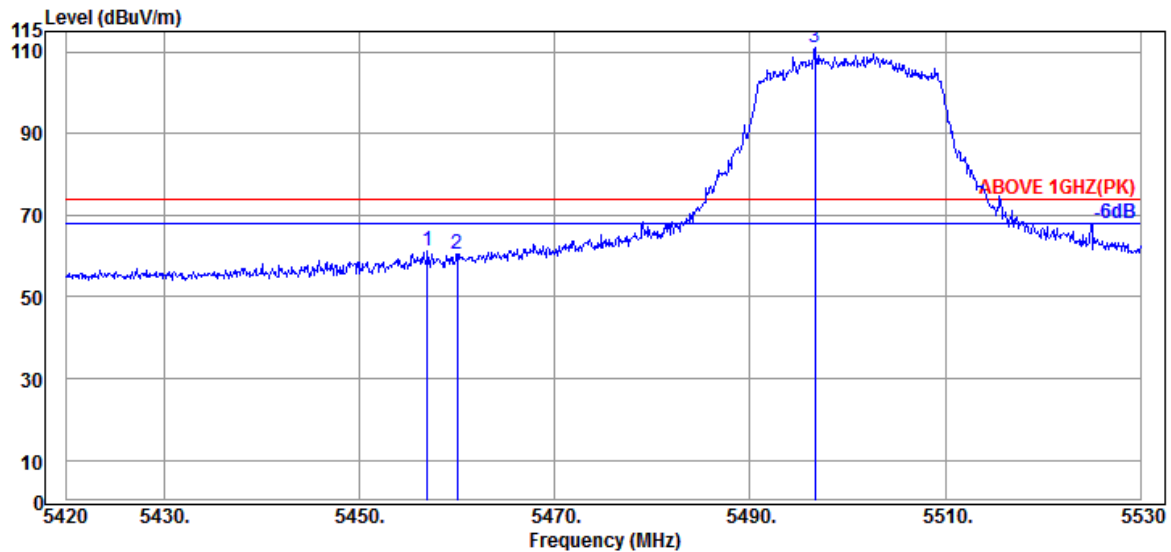

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.960	34.60	9.05	34.21	52.01	61.45	74.00	12.55	Peak
5460.040	34.60	9.05	34.21	50.91	60.35	74.00	13.65	Peak
@ 5496.670	34.70	9.08	34.20	101.55	111.13	---	---	Peak

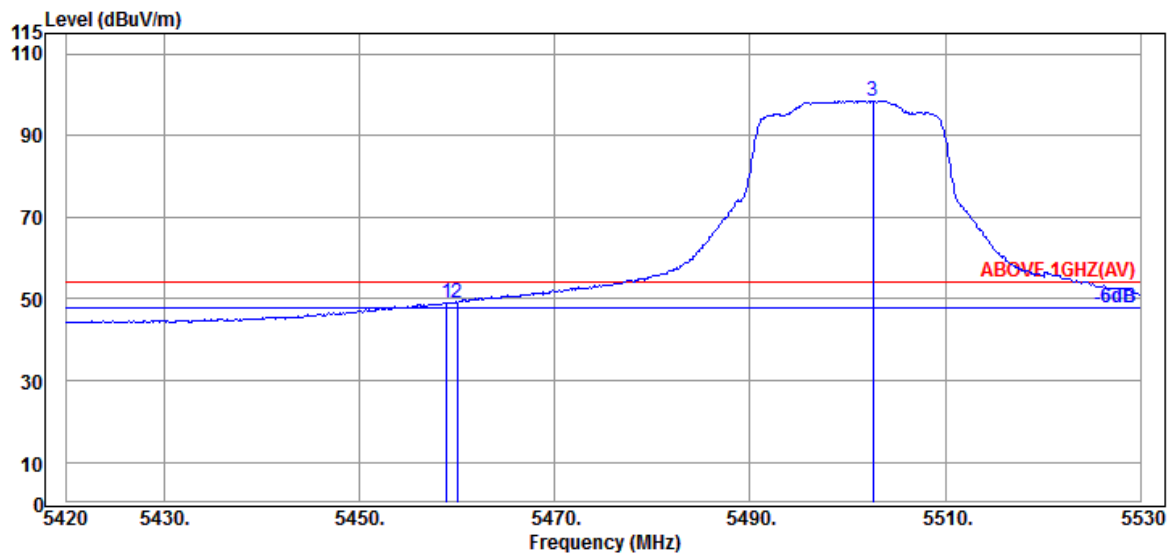

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.940	34.60	9.05	34.21	39.74	49.18	54.00	4.82	Average
5460.040	34.60	9.05	34.21	39.71	49.15	54.00	4.85	Average
@ 5502.610	34.70	9.08	34.20	88.92	98.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

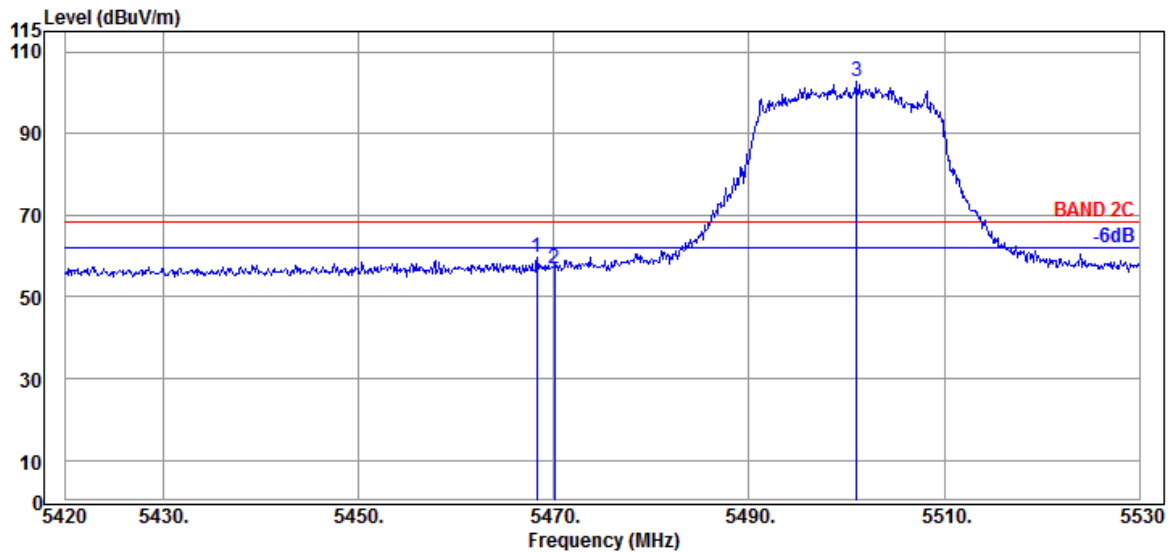

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	34.63	9.06	34.21	50.15	59.63	68.20	8.57	Peak
5470.050	34.63	9.06	34.21	47.56	57.04	68.20	11.16	Peak
@ 5501.070	34.70	9.08	34.20	93.28	102.86	---	---	Peak

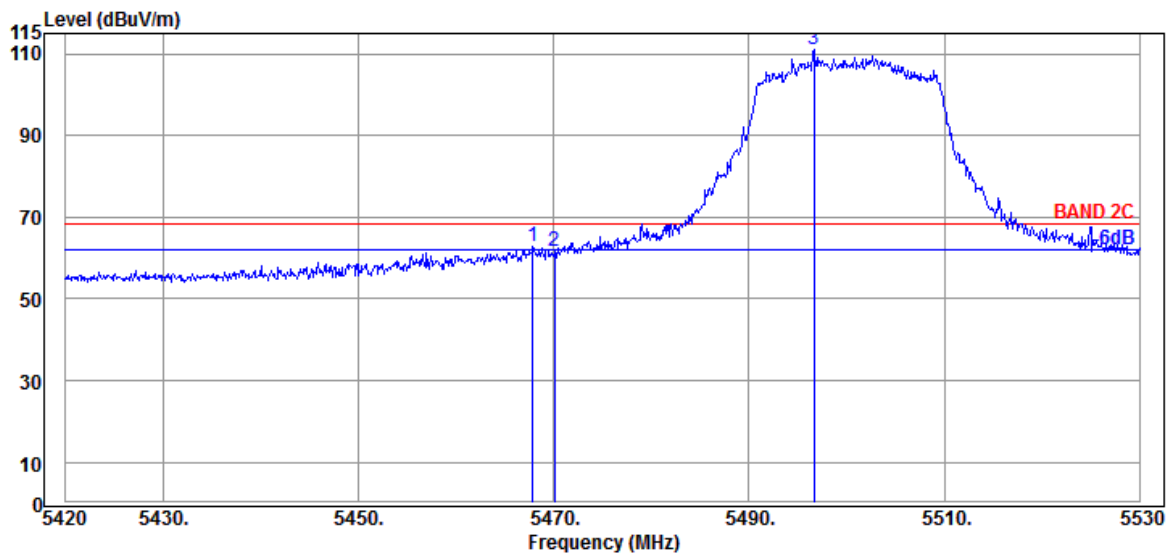

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.63	9.06	34.21	53.32	62.80	68.20	5.40	Peak
5470.050	34.63	9.06	34.21	52.35	61.83	68.20	6.37	Peak
@ 5496.670	34.70	9.08	34.20	101.55	111.13	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

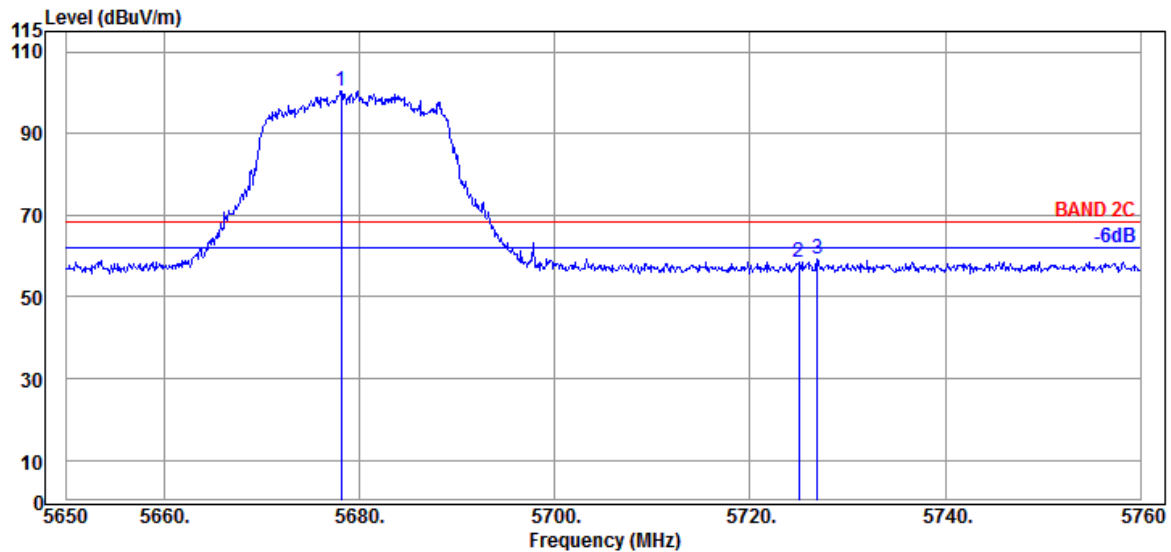

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5678.160	34.63	9.17	34.29	90.95	100.46	---	---	Peak
	5725.020	34.90	9.20	34.30	48.56	58.36	68.20	9.84	Peak
	5726.890	34.90	9.20	34.31	49.48	59.27	68.20	8.93	Peak

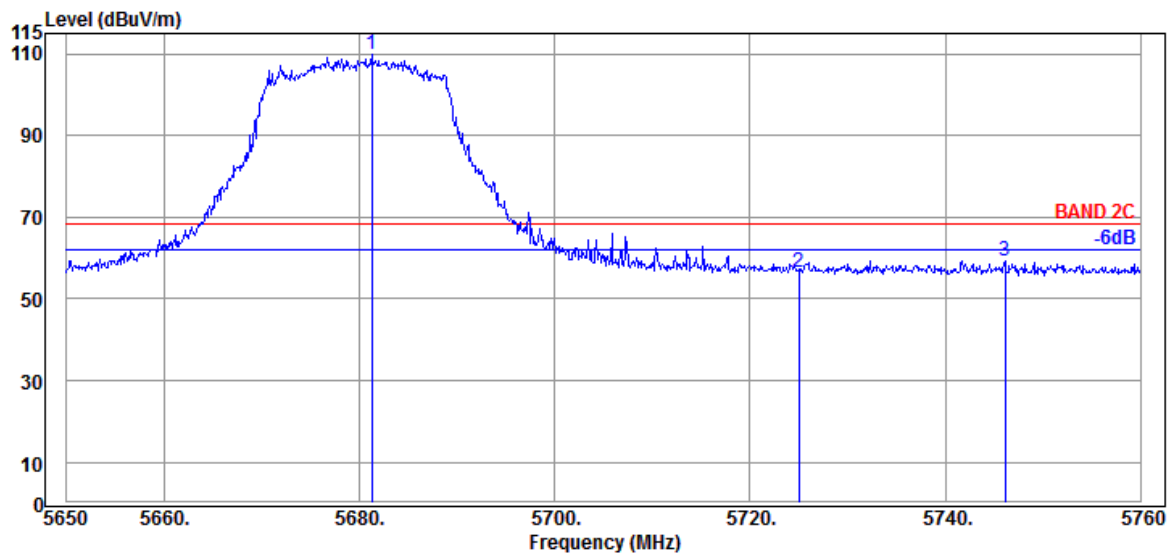

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5681.240	34.63	9.17	34.29	100.17	109.68	---	---	Peak
	5725.020	34.90	9.20	34.30	46.87	56.67	68.20	11.53	Peak
	5746.140	35.00	9.20	34.32	49.31	59.19	68.20	9.01	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

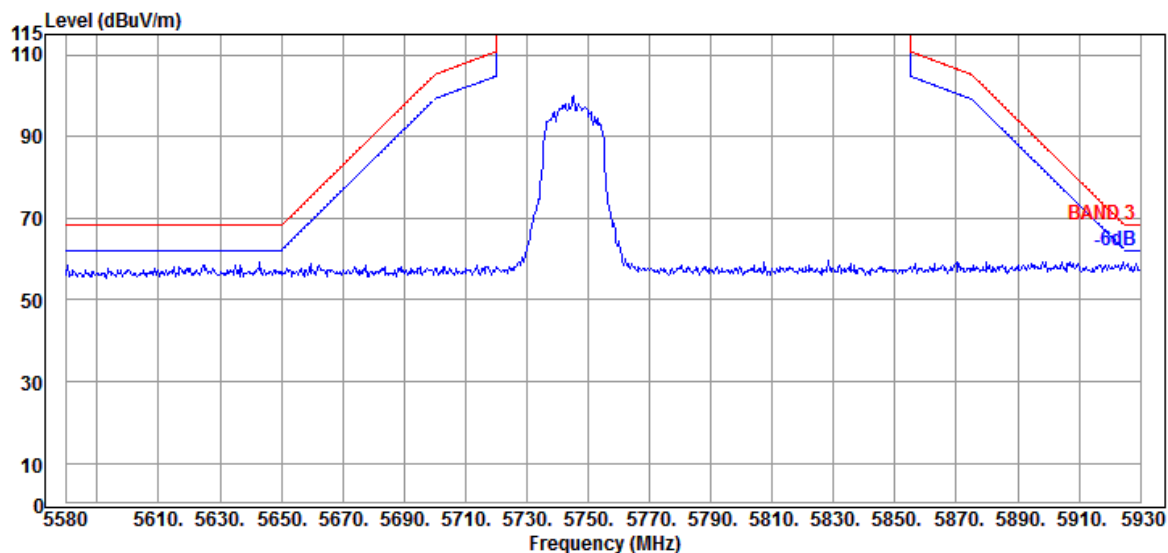

Antenna at Vertical Polarization

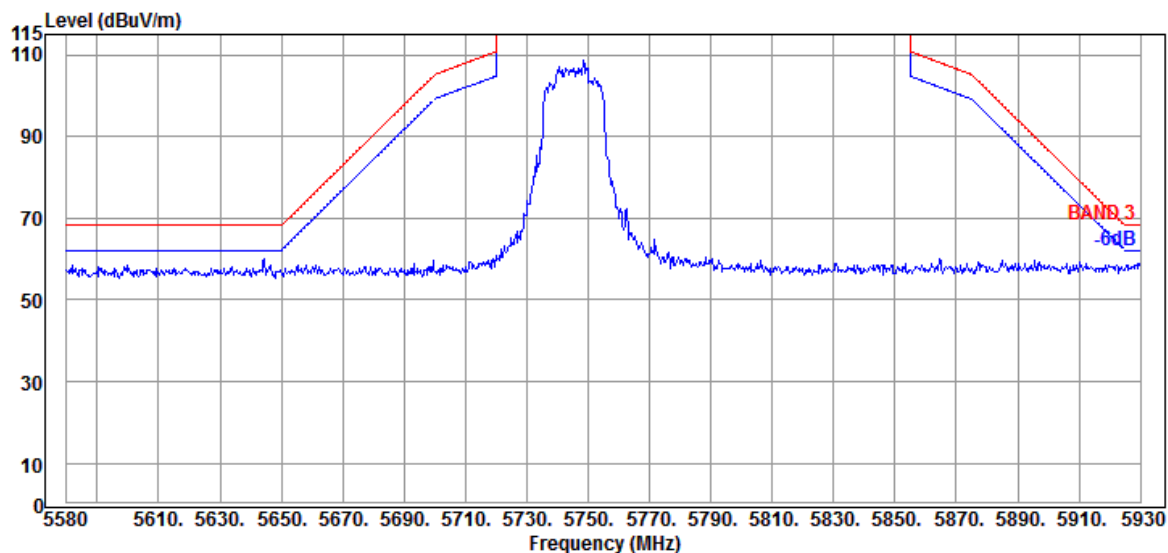

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz

Antenna at Horizontal Polarization

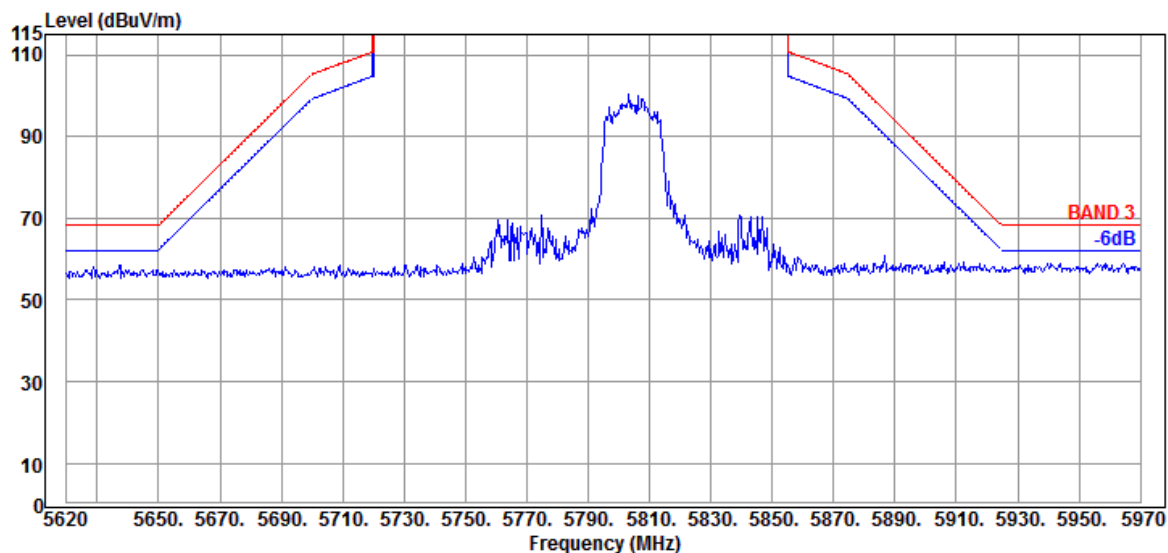

Antenna at Vertical Polarization

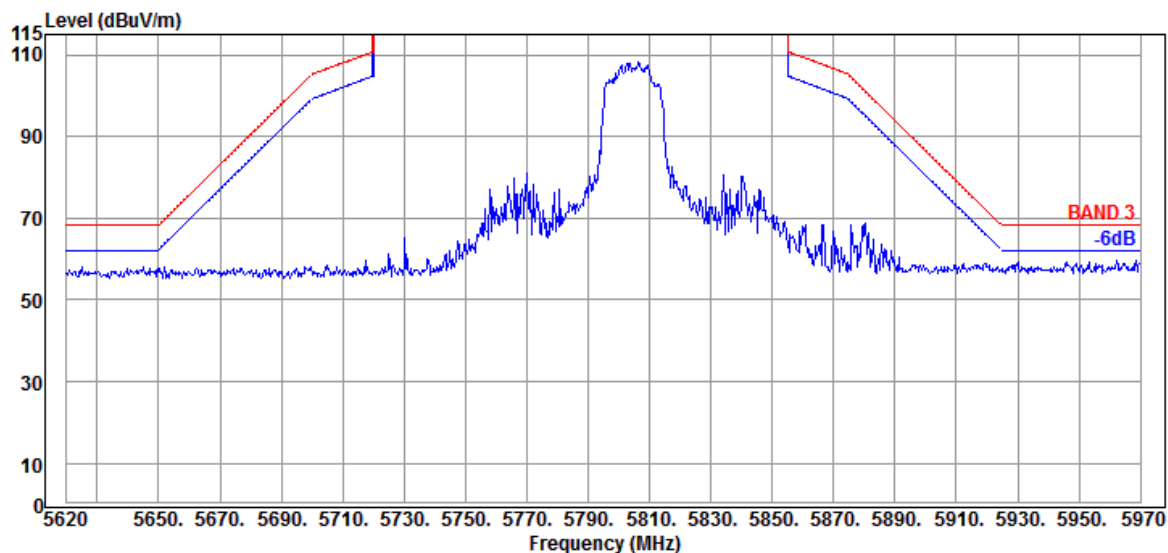

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

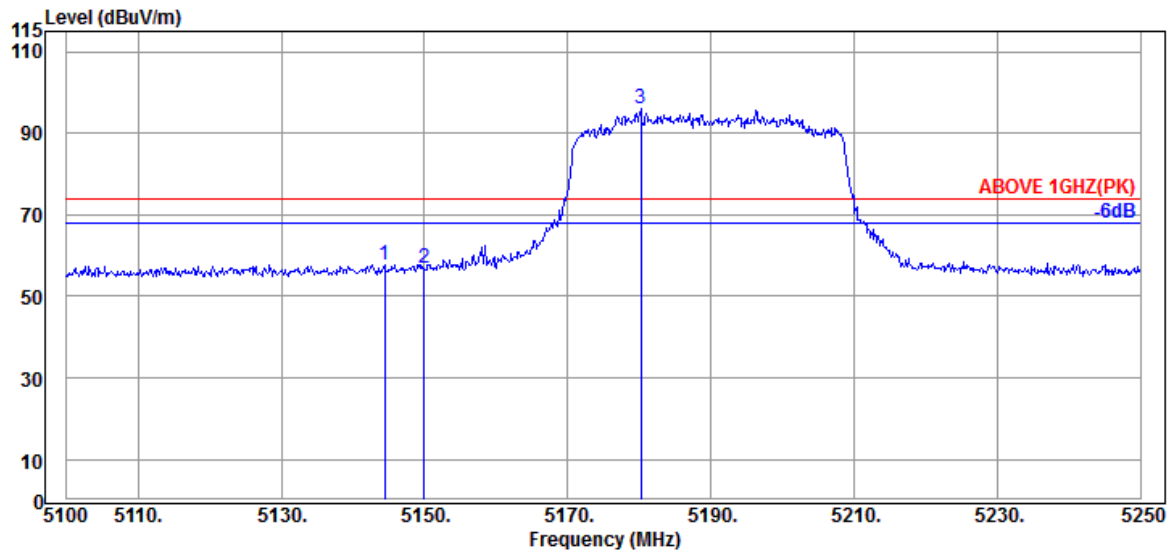

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.400	34.50	8.88	34.34	48.79	57.83	74.00	16.17	Peak
5149.950	34.50	8.88	34.34	47.67	56.71	74.00	17.29	Peak
@ 5180.250	34.63	8.90	34.32	86.85	96.06	---	---	Peak

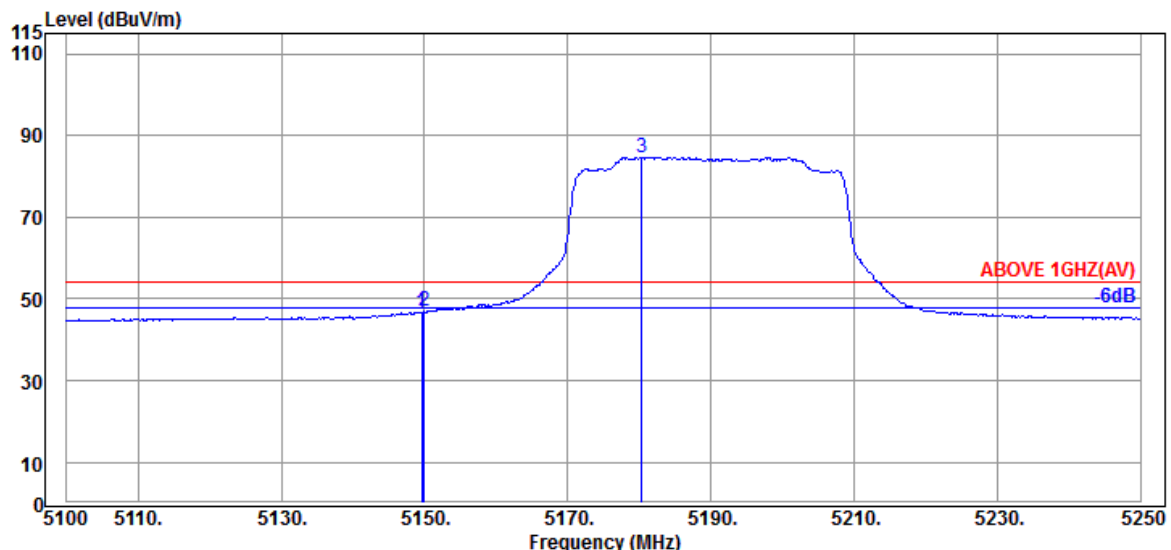

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.50	8.88	34.34	37.71	46.75	54.00	7.25	Average
5149.950	34.50	8.88	34.34	37.79	46.83	54.00	7.17	Average
@ 5180.400	34.63	8.90	34.32	75.53	84.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

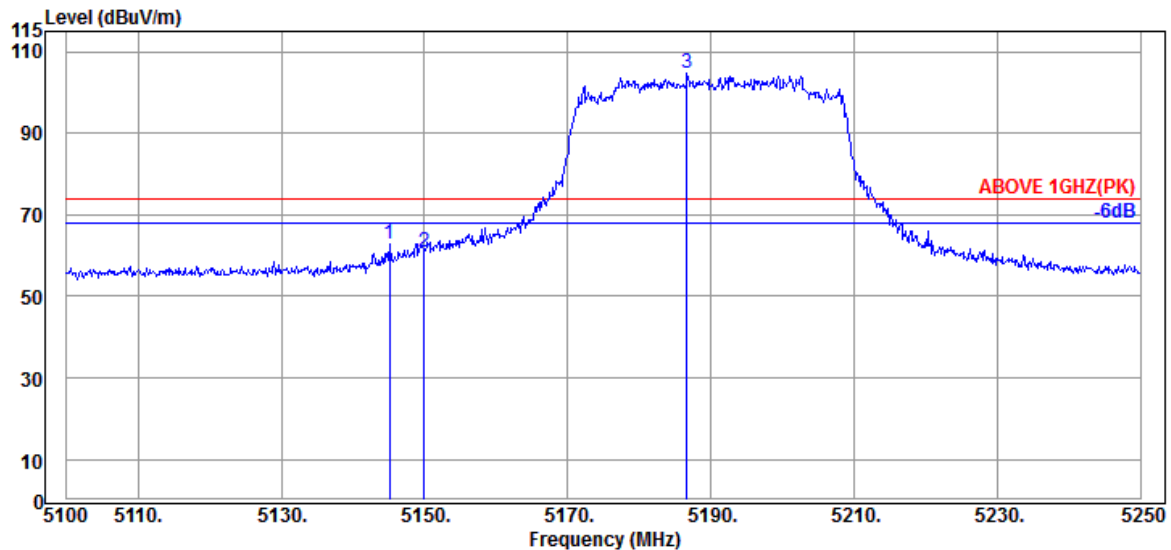

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.150	34.50	8.88	34.34	53.98	63.02	74.00	10.98	Peak
5149.950	34.50	8.88	34.34	51.88	60.92	74.00	13.08	Peak
@ 5186.700	34.70	8.91	34.32	95.30	104.59	---	---	Peak

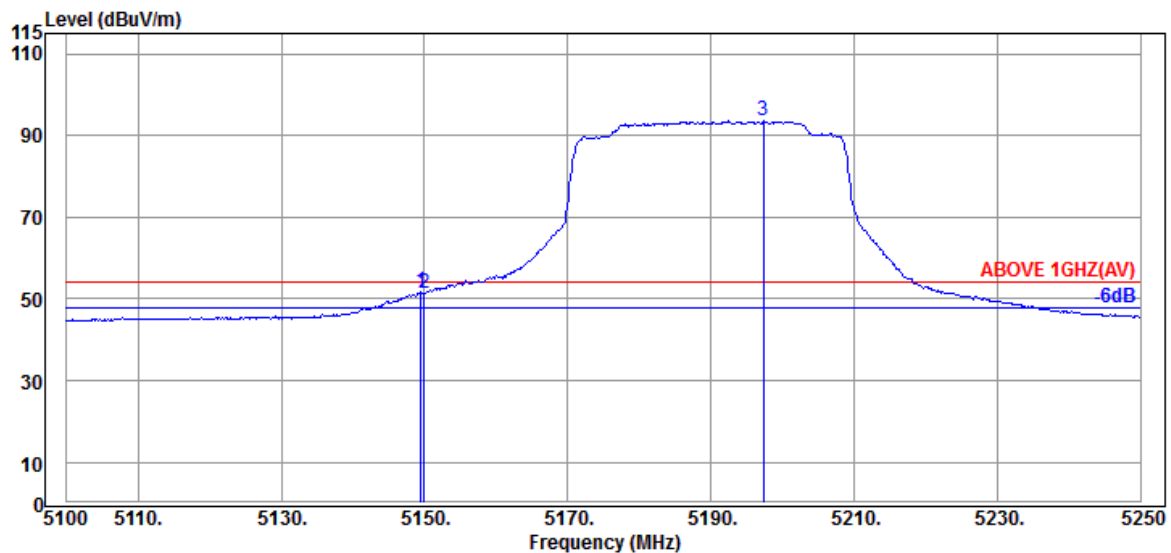

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.88	34.34	42.53	51.57	54.00	2.43	Average
5149.950	34.50	8.88	34.34	42.36	51.40	54.00	2.60	Average
@ 5197.350	34.70	8.91	34.32	84.27	93.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

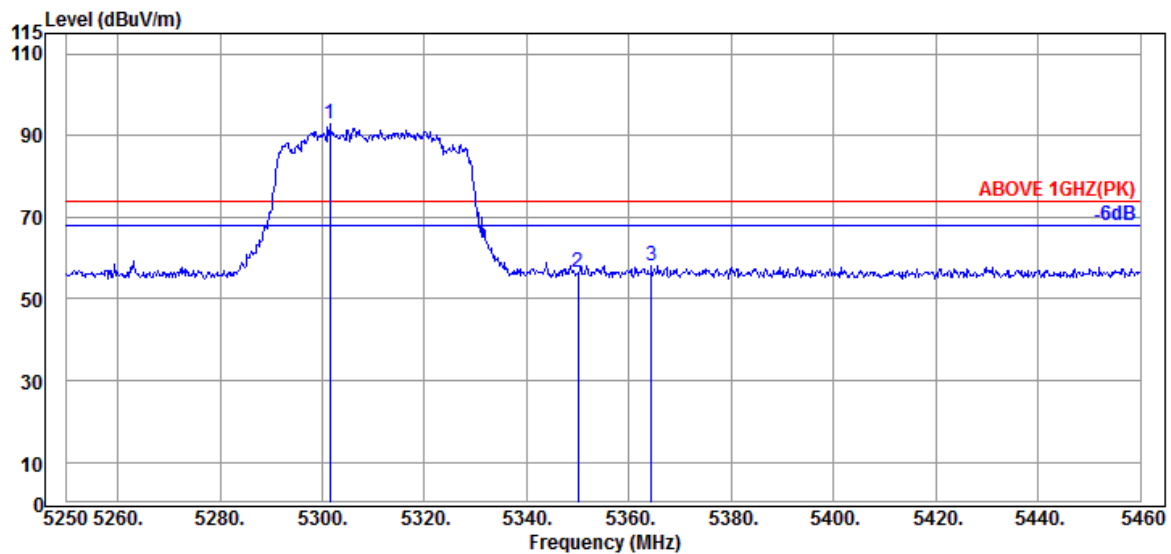

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.450	34.40	8.97	34.28	83.82	92.91	---	---	Peak
5349.960	34.90	8.99	34.26	46.93	56.56	74.00	17.44	Peak
5364.450	34.87	9.00	34.25	48.48	58.10	74.00	15.90	Peak

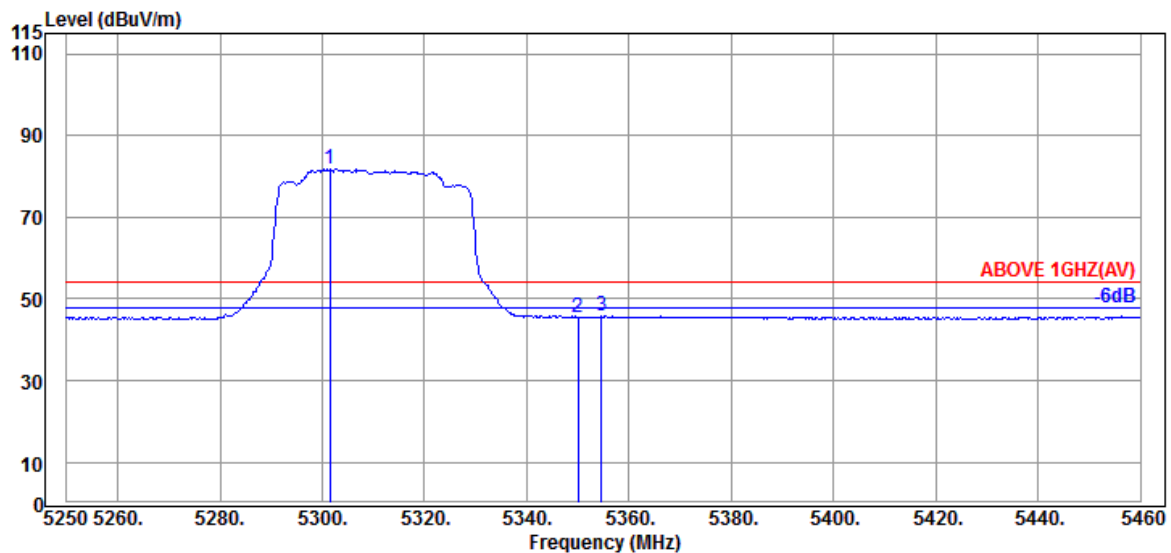

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.450	34.40	8.97	34.28	72.58	81.67	---	---	Average
5349.960	34.90	8.99	34.26	35.99	45.62	54.00	8.38	Average
5354.580	34.87	9.00	34.26	36.11	45.72	54.00	8.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

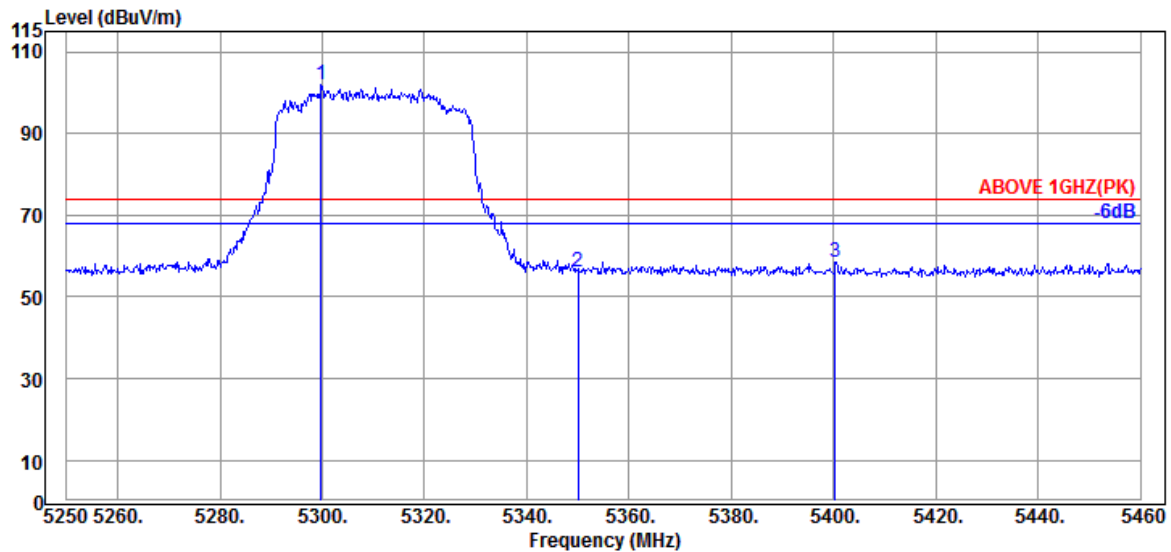

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.770	34.40	8.97	34.28	92.68	101.77	---	---	Peak
5349.960	34.90	8.99	34.26	46.42	56.05	74.00	17.95	Peak
5400.360	34.80	9.02	34.23	48.81	58.40	74.00	15.60	Peak

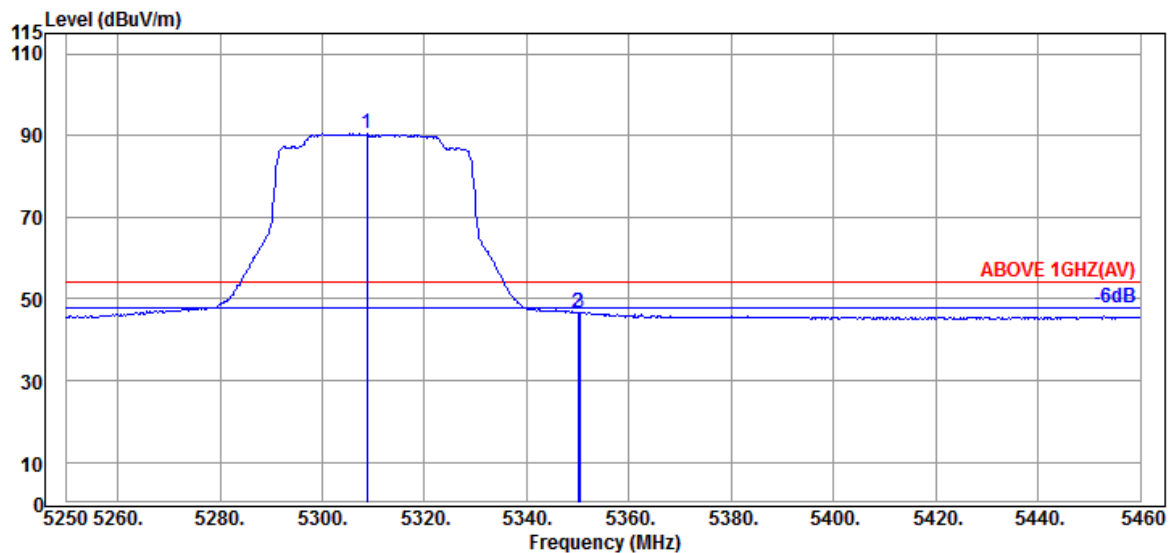

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.800	34.57	8.98	34.28	81.11	90.38	---	---	Average
5349.960	34.90	8.99	34.26	37.05	46.68	54.00	7.32	Average
5350.380	34.90	8.99	34.26	37.06	46.69	54.00	7.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

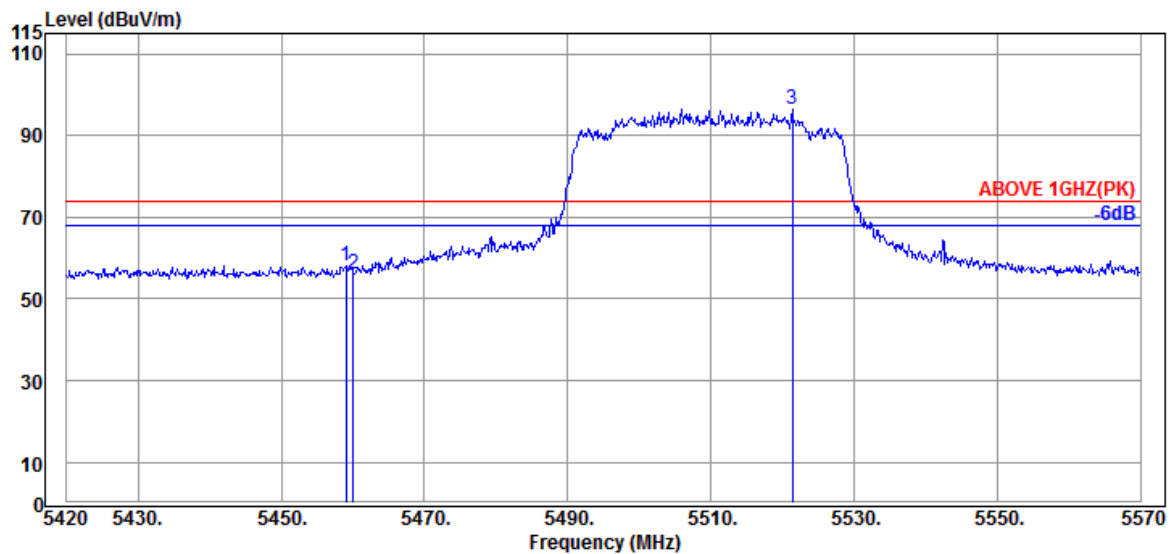

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.60	9.05	34.21	48.80	58.24	74.00	15.76	Peak
5460.050	34.60	9.05	34.21	46.81	56.25	74.00	17.75	Peak
@ 5521.400	34.70	9.09	34.21	86.98	96.56	---	---	Peak

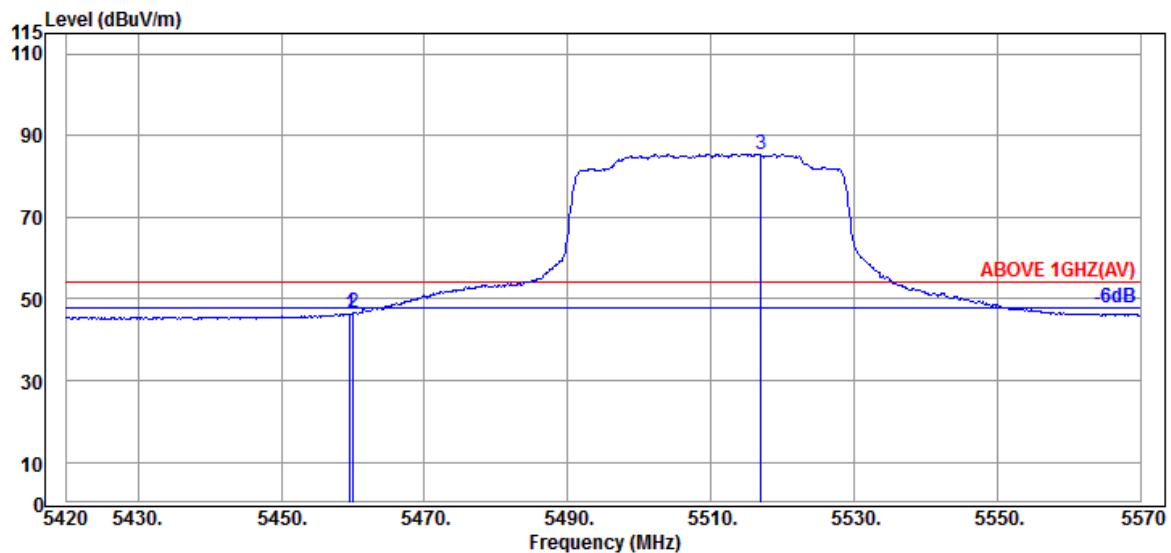

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.60	9.05	34.21	36.99	46.43	54.00	7.57	Average
5460.050	34.60	9.05	34.21	37.09	46.53	54.00	7.47	Average
@ 5517.050	34.70	9.09	34.21	75.86	85.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

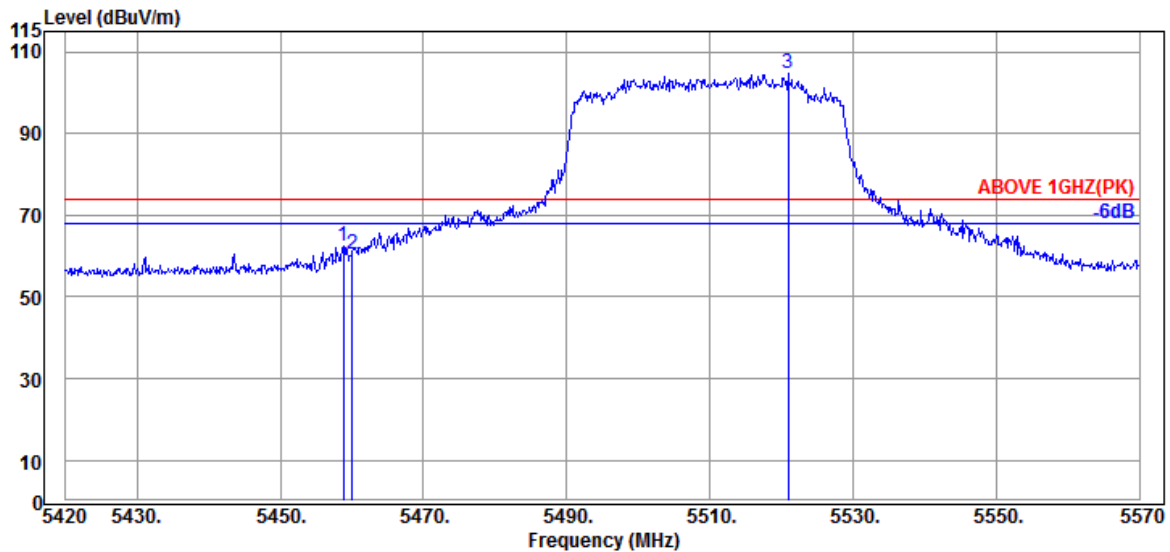

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.850	34.60	9.05	34.21	53.07	62.51	74.00	11.49	Peak
5460.050	34.60	9.05	34.21	51.05	60.49	74.00	13.51	Peak
@ 5520.950	34.70	9.09	34.21	94.99	104.57	---	---	Peak

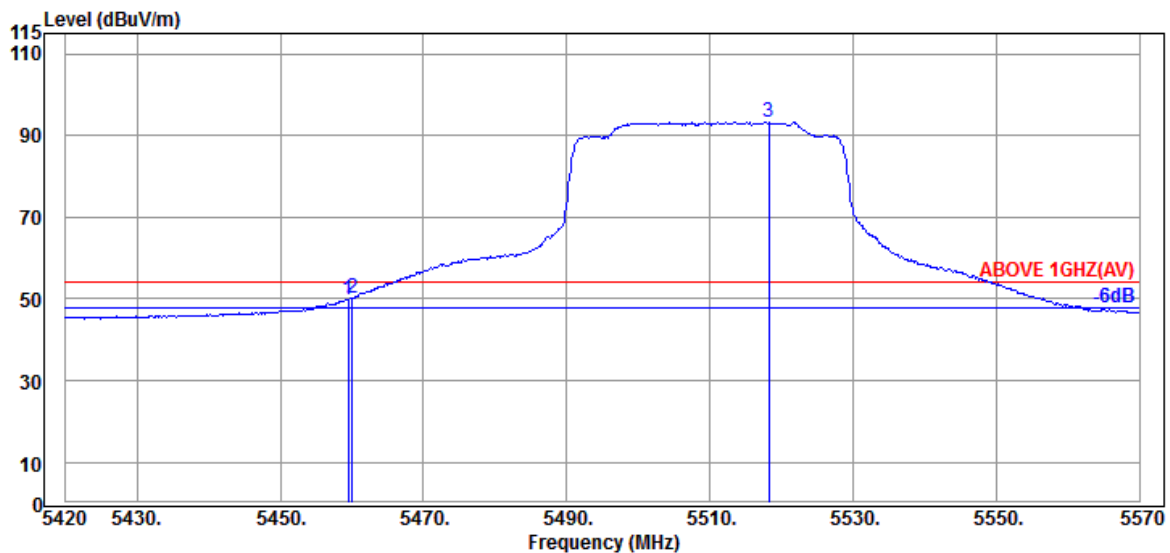

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.450	34.60	9.05	34.21	40.53	49.97	54.00	4.03	Average
5460.050	34.60	9.05	34.21	40.84	50.28	54.00	3.72	Average
@ 5518.250	34.70	9.09	34.21	83.72	93.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

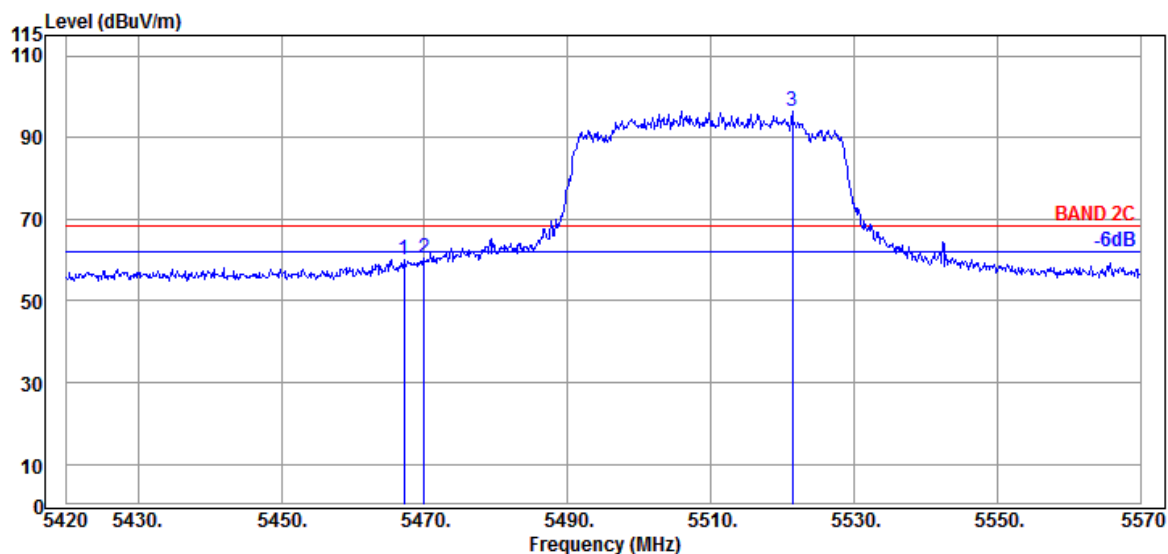

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.63	9.06	34.21	50.61	60.09	68.20	8.11	Peak
5469.950	34.63	9.06	34.21	50.87	60.35	68.20	7.85	Peak
@ 5521.400	34.70	9.09	34.21	86.98	96.56	---	---	Peak

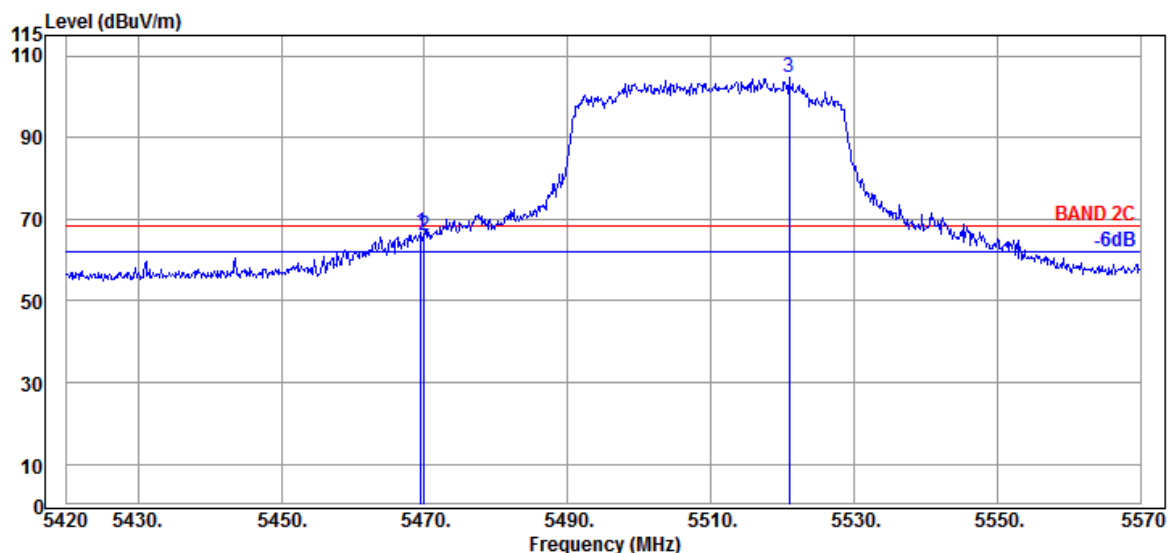

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.63	9.06	34.21	57.16	66.64	68.20	1.56	Peak
5469.950	34.63	9.06	34.21	56.55	66.03	68.20	2.17	Peak
@ 5520.950	34.70	9.09	34.21	94.99	104.57	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

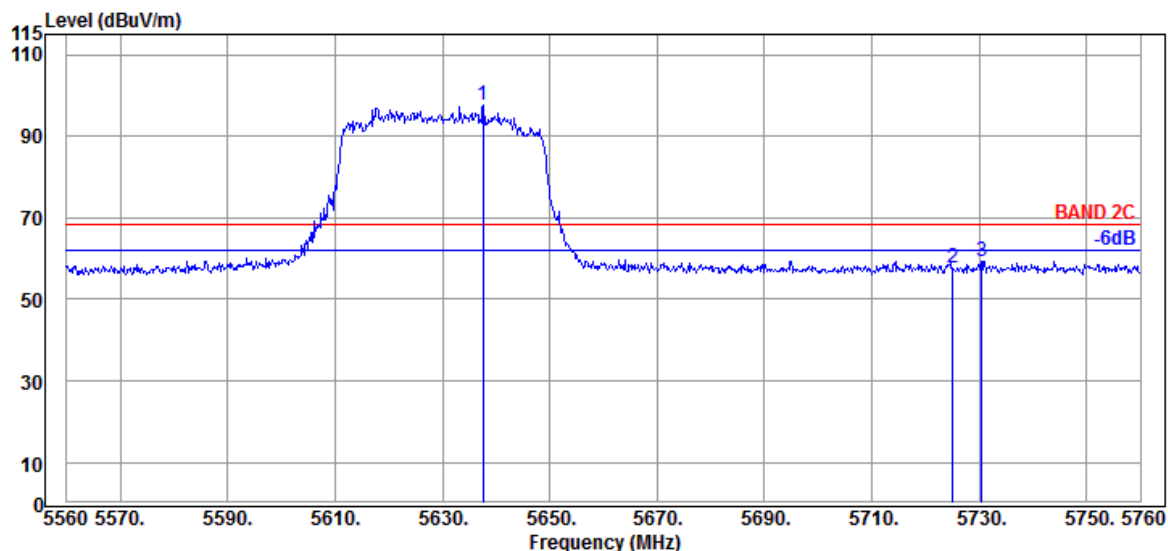

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5637.600	34.47	9.14	34.27	88.22	97.56	---	---	Peak
	5725.000	34.90	9.20	34.30	47.87	57.67	68.20	10.53	Peak
	5730.400	34.90	9.20	34.31	49.48	59.27	68.20	8.93	Peak

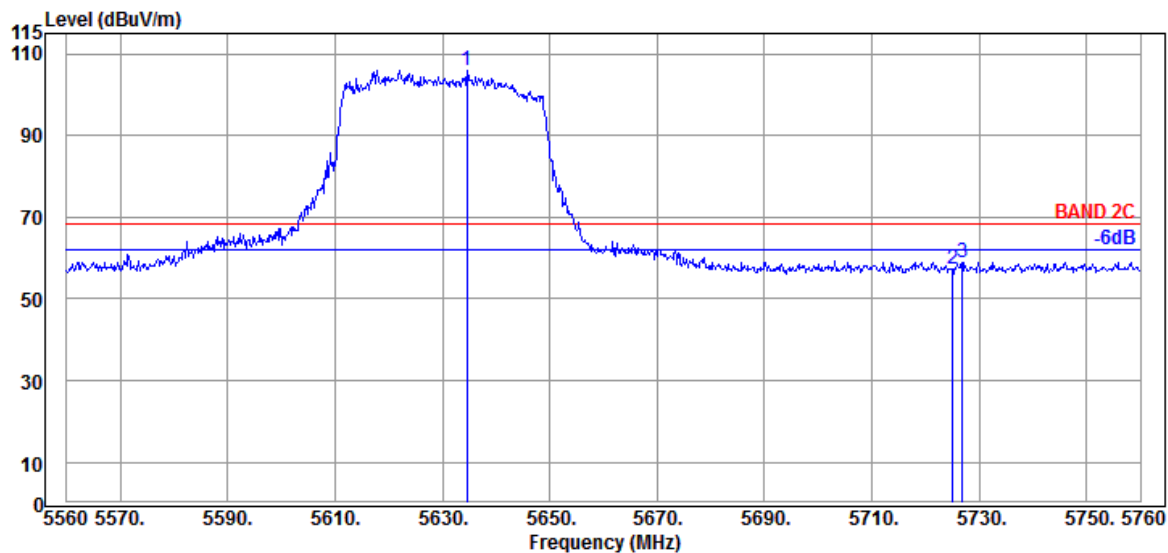

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5634.600	34.47	9.14	34.27	96.72	106.06	---	---	Peak
	5725.000	34.90	9.20	34.30	47.51	57.31	68.20	10.89	Peak
	5726.800	34.90	9.20	34.31	49.15	58.94	68.20	9.26	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

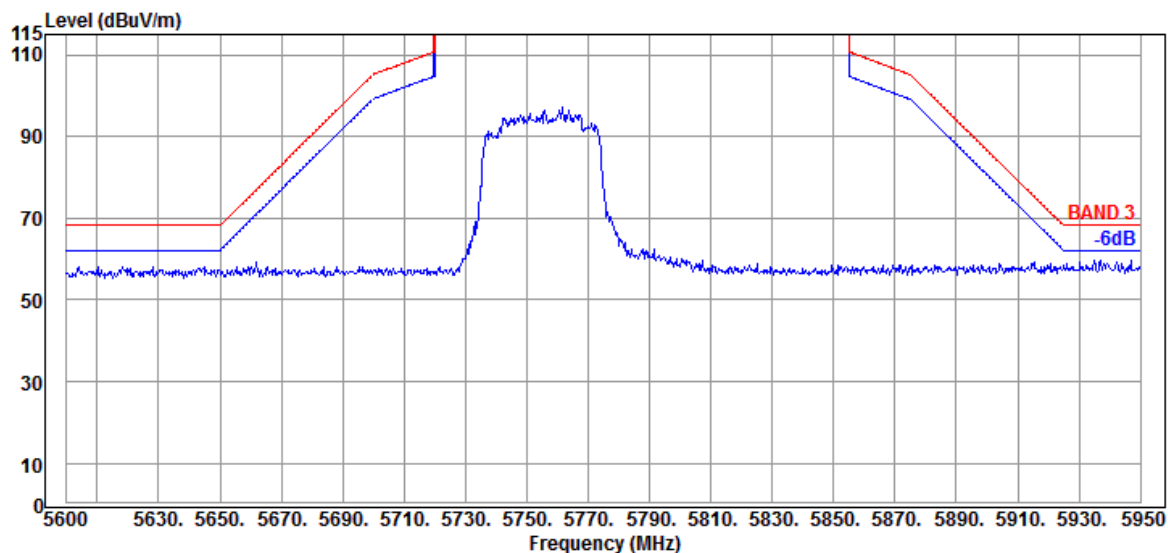

Antenna at Vertical Polarization

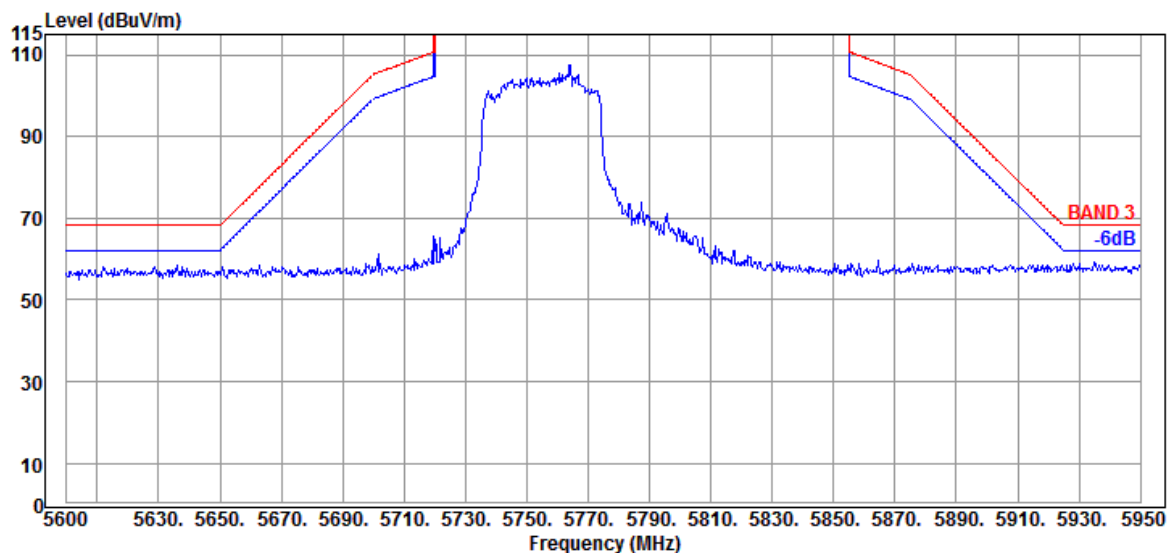

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

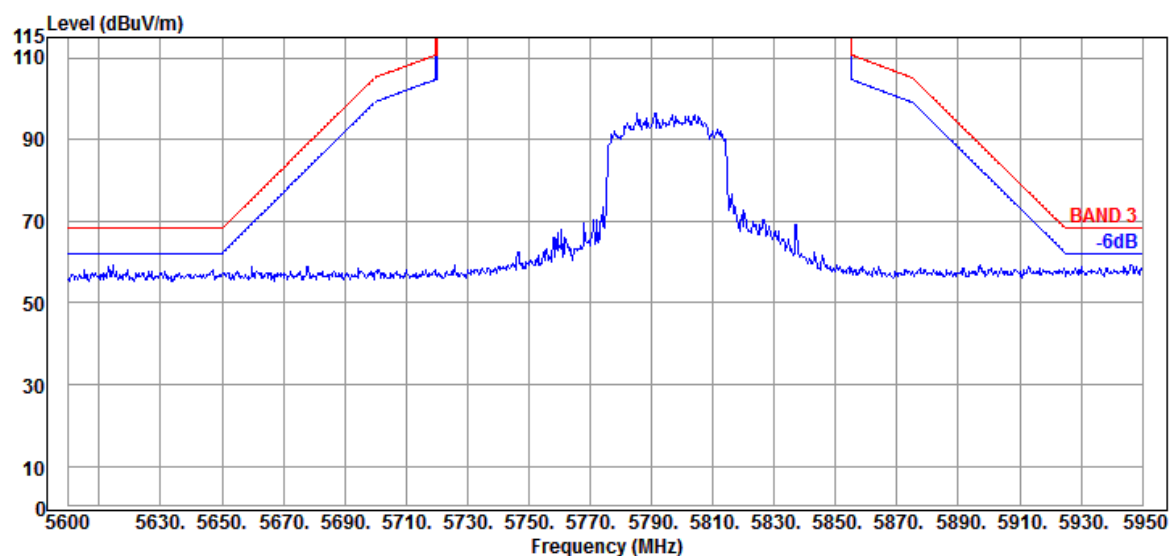

Antenna at Vertical Polarization

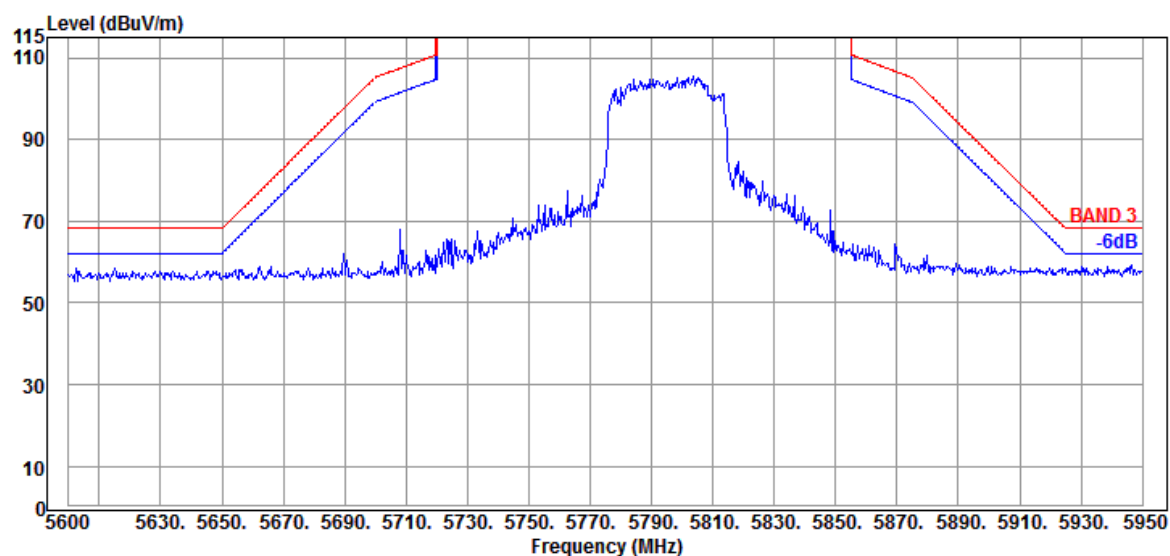

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

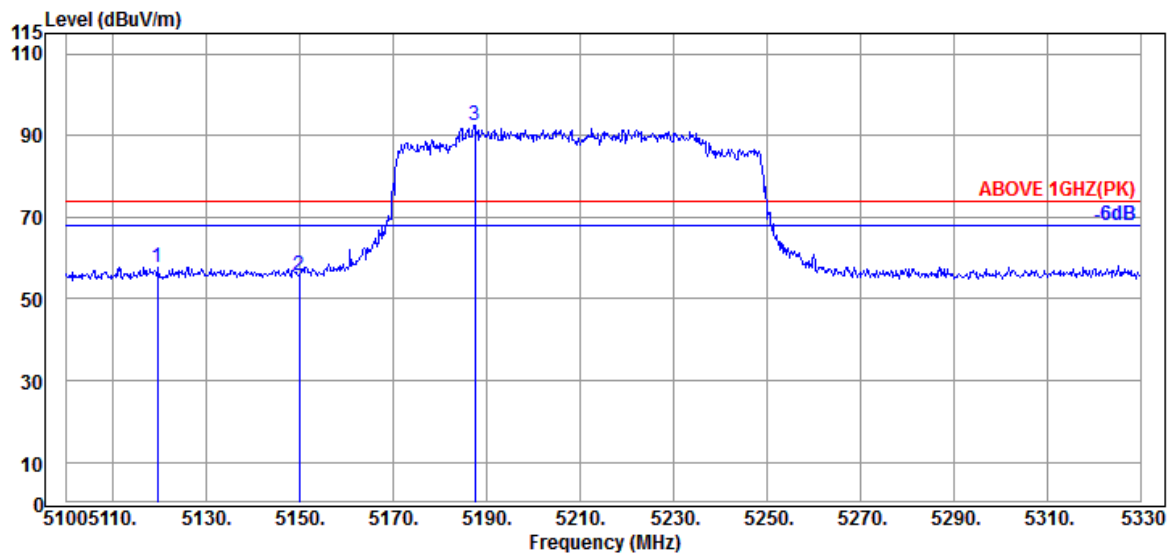

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.550	34.30	8.87	34.35	49.07	57.89	74.00	16.11	Peak
5149.910	34.50	8.88	34.34	46.81	55.85	74.00	18.15	Peak
@ 5187.400	34.70	8.91	34.32	83.20	92.49	---	---	Peak

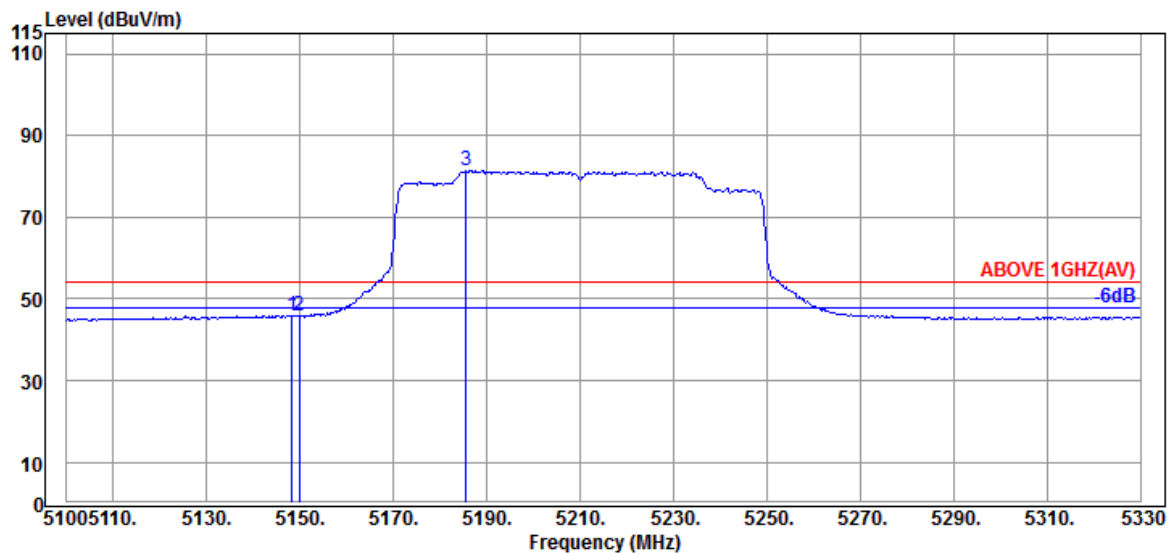

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.50	8.88	34.34	36.93	45.97	54.00	8.03	Average
5149.910	34.50	8.88	34.34	36.72	45.76	54.00	8.24	Average
@ 5185.560	34.63	8.90	34.32	72.21	81.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

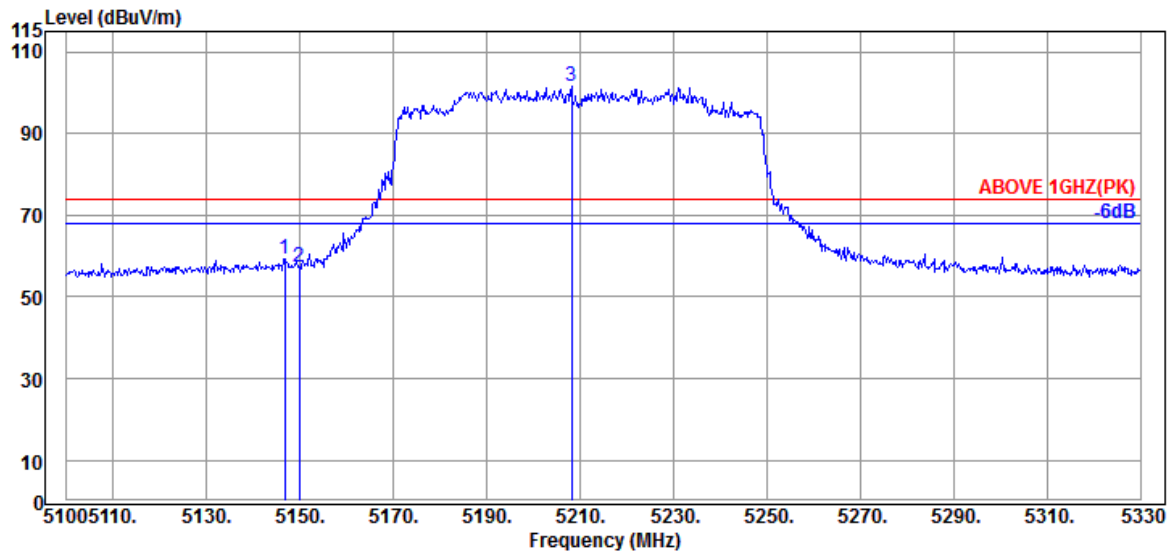

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.690	34.50	8.88	34.34	50.41	59.45	74.00	14.55	Peak
5149.910	34.50	8.88	34.34	48.22	57.26	74.00	16.74	Peak
@ 5208.100	34.65	8.92	34.31	92.25	101.51	---	---	Peak

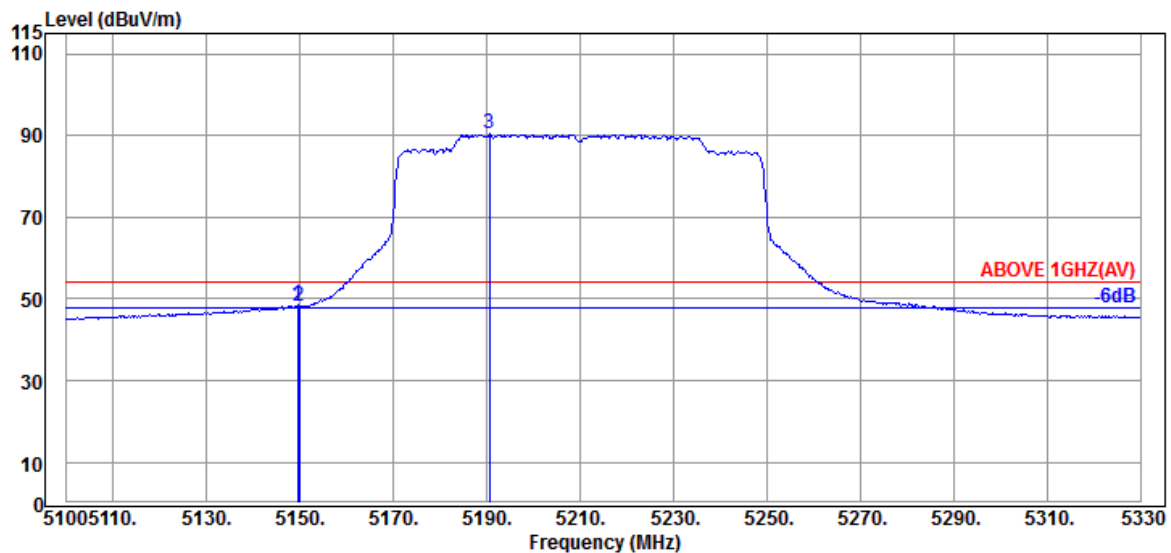

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.50	8.88	34.34	39.48	48.52	54.00	5.48	Average
5149.910	34.50	8.88	34.34	39.10	48.14	54.00	5.86	Average
@ 5190.620	34.70	8.91	34.32	81.01	90.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

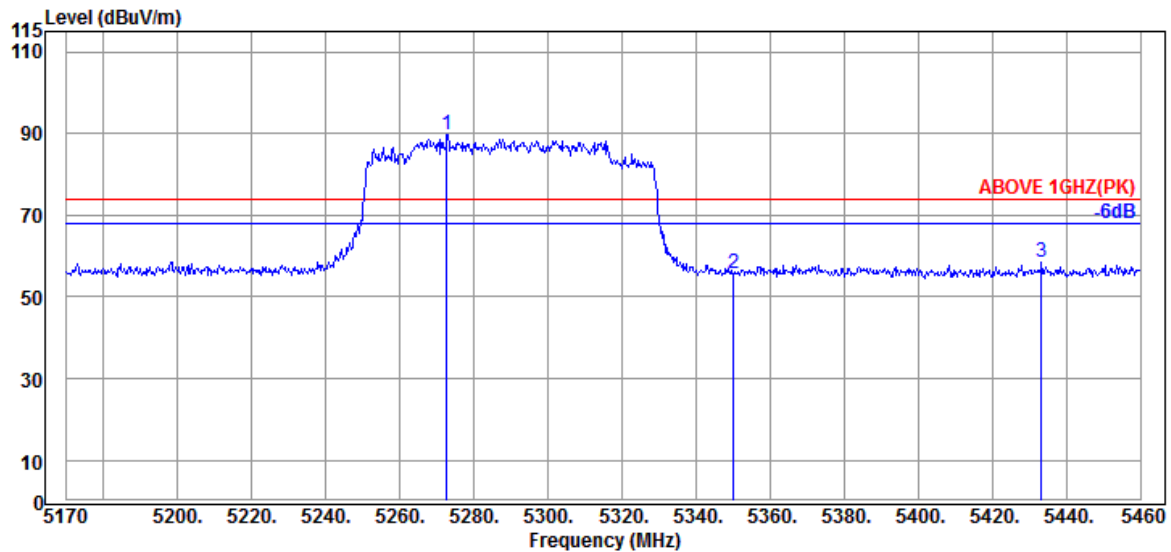

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.660	34.47	8.95	34.29	80.74	89.87	---	---	Peak
5350.090	34.90	8.99	34.26	46.04	55.67	74.00	18.33	Peak
5433.320	34.65	9.04	34.23	48.96	58.42	74.00	15.58	Peak

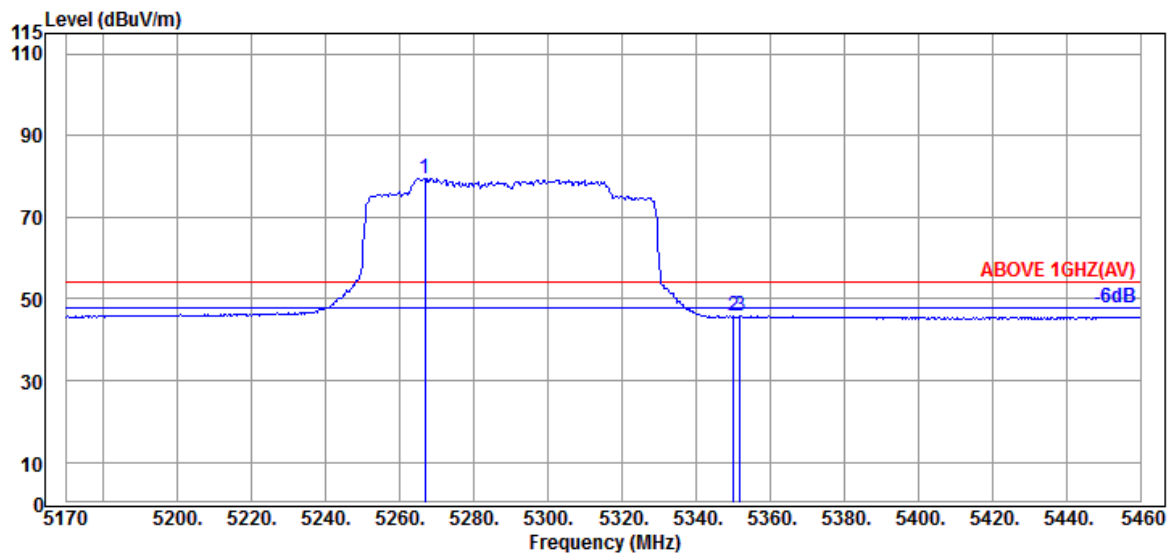

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.860	34.47	8.95	34.29	70.39	79.52	---	---	Average
5350.090	34.90	8.99	34.26	36.02	45.65	54.00	8.35	Average
5351.830	34.90	8.99	34.26	36.21	45.84	54.00	8.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

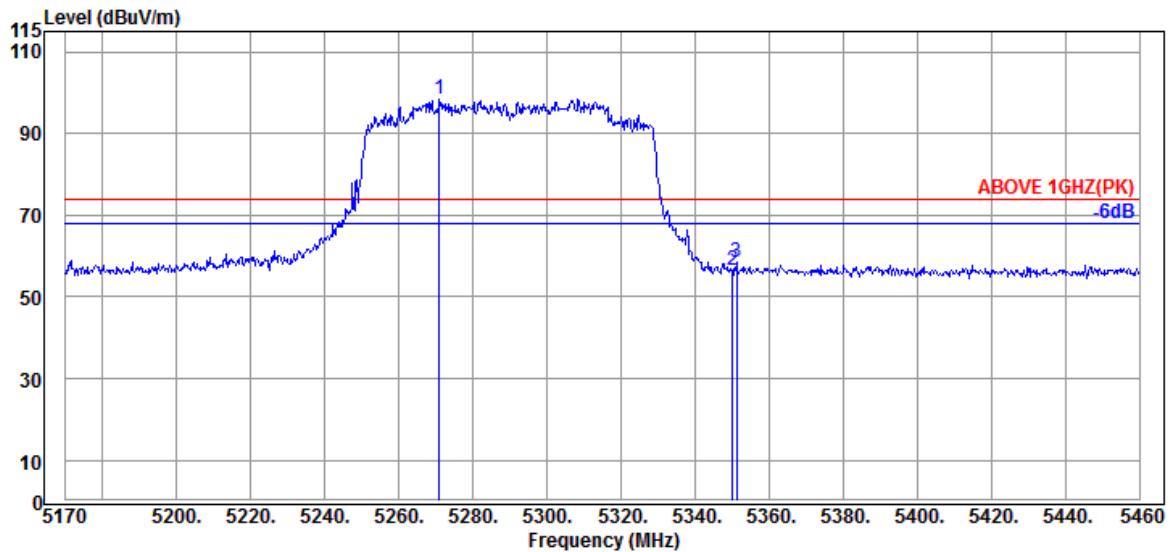

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.920	34.47	8.95	34.29	89.44	98.57	---	---	Peak
5350.090	34.90	8.99	34.26	46.81	56.44	74.00	17.56	Peak
5351.250	34.90	8.99	34.26	48.73	58.36	74.00	15.64	Peak

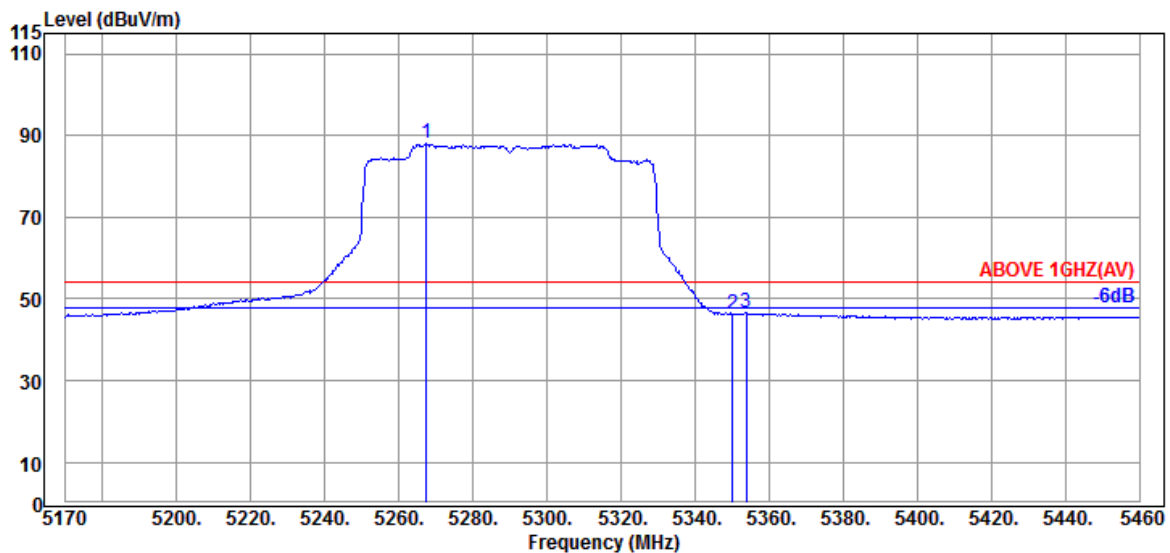

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.440	34.47	8.95	34.29	78.81	87.94	---	---	Average
5350.090	34.90	8.99	34.26	36.53	46.16	54.00	7.84	Average
5353.860	34.90	8.99	34.26	36.88	46.51	54.00	7.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

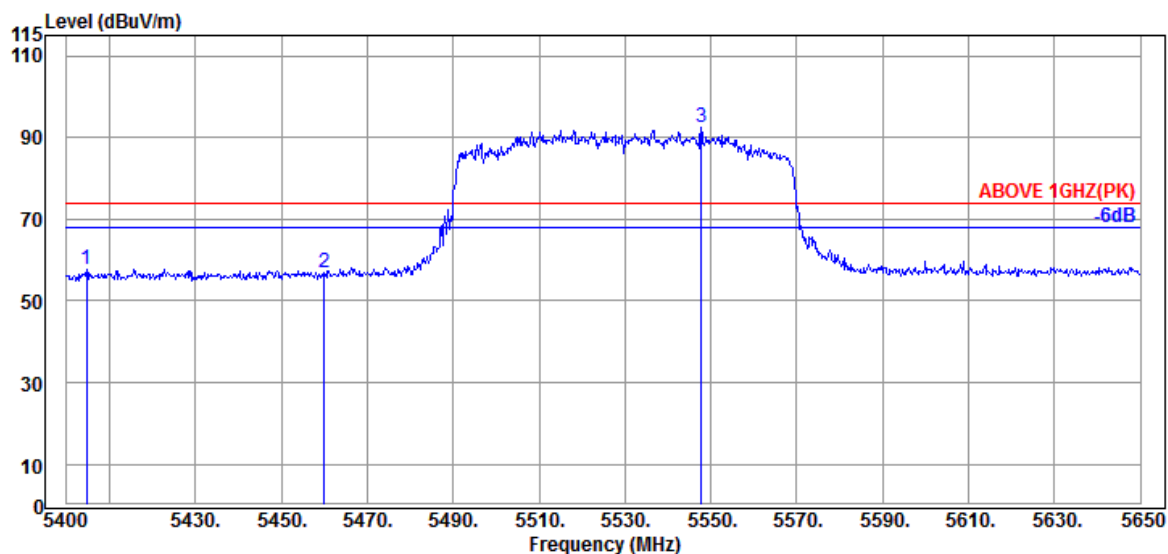

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5404.750	34.75	9.03	34.23	48.30	57.85	74.00	16.15	Peak
5460.000	34.60	9.05	34.21	47.47	56.91	74.00	17.09	Peak
@ 5547.750	34.70	9.10	34.23	83.05	92.62	---	---	Peak

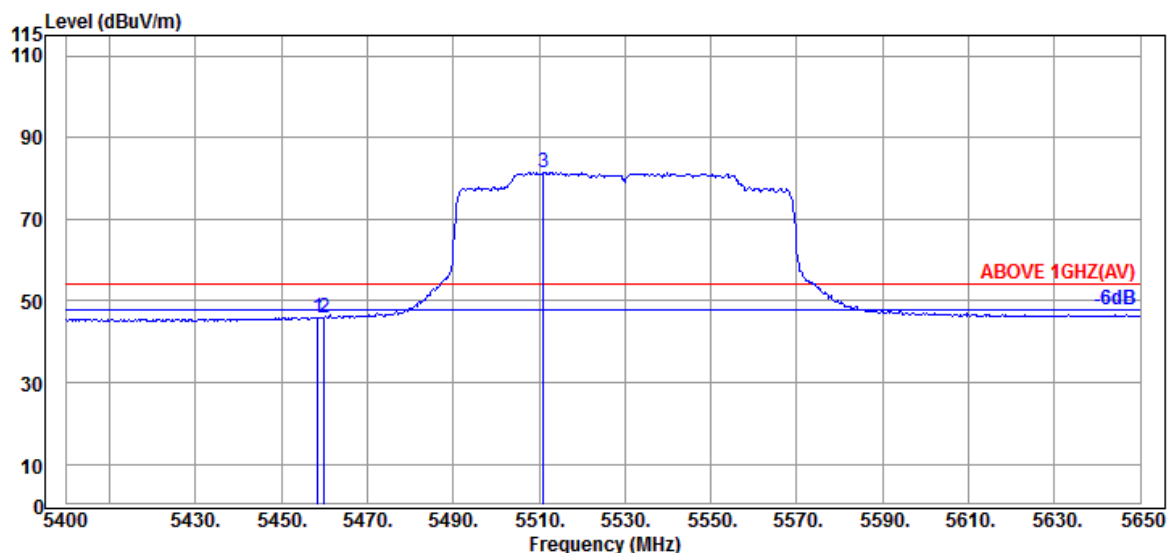

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.60	9.05	34.21	36.51	45.95	54.00	8.05	Average
5460.000	34.60	9.05	34.21	36.34	45.78	54.00	8.22	Average
@ 5511.000	34.70	9.08	34.21	72.01	81.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

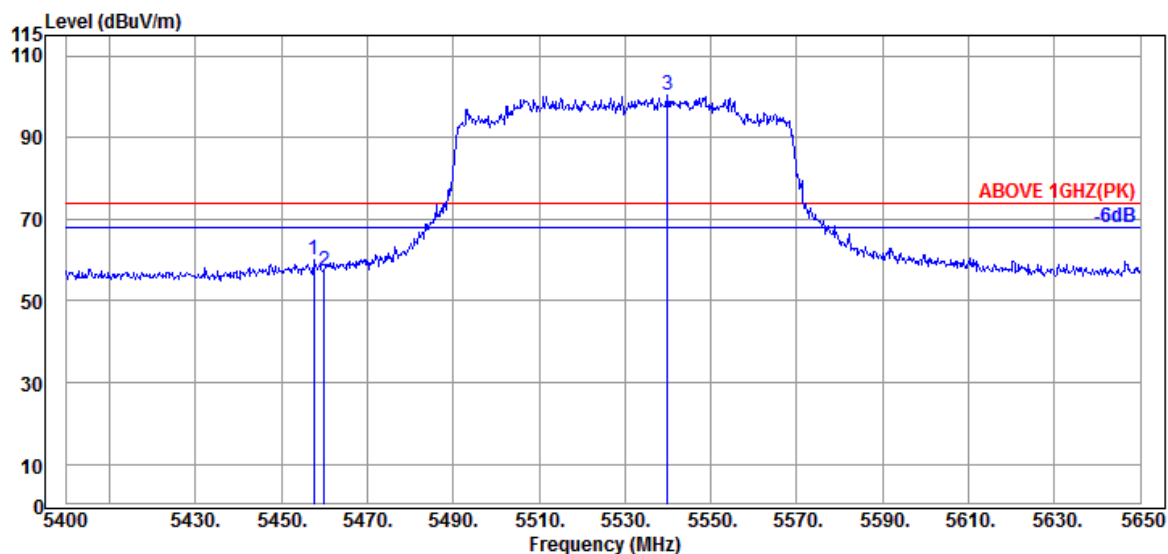

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.60	9.05	34.21	50.49	59.93	74.00	14.07	Peak
5460.000	34.60	9.05	34.21	48.03	57.47	74.00	16.53	Peak
@ 5540.000	34.70	9.09	34.22	90.89	100.46	---	---	Peak

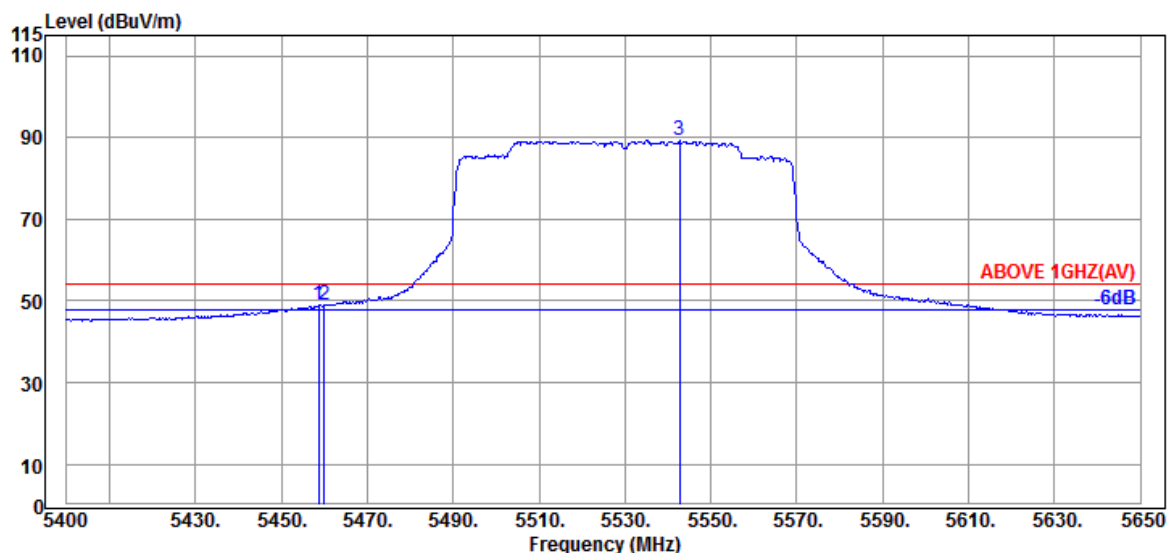

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.60	9.05	34.21	39.74	49.18	54.00	4.82	Average
5460.000	34.60	9.05	34.21	39.49	48.93	54.00	5.07	Average
@ 5542.750	34.70	9.09	34.23	79.74	89.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

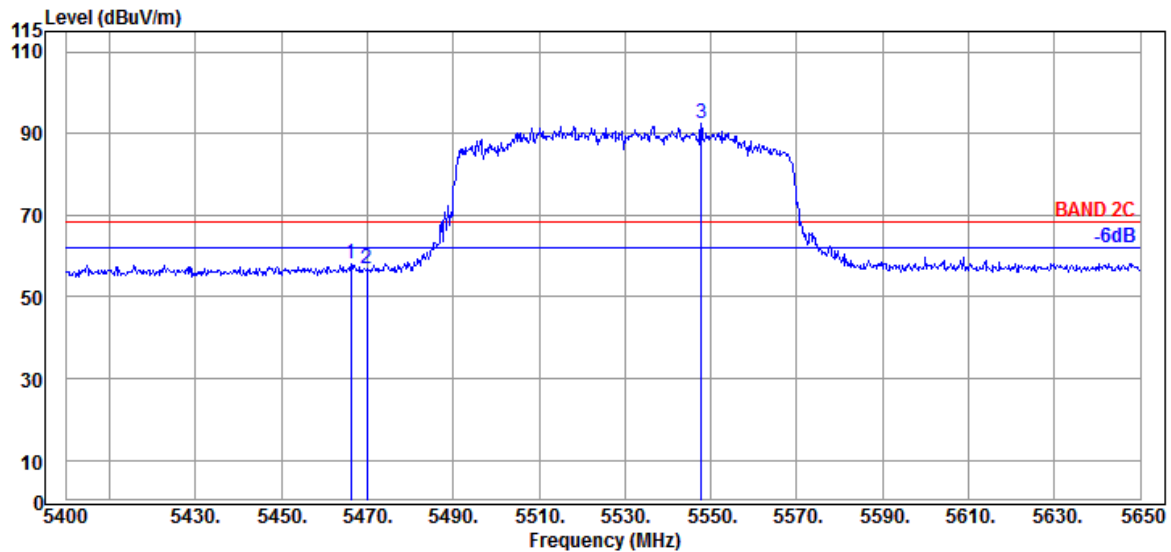

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.250	34.63	9.06	34.21	48.45	57.93	68.20	10.27	Peak
5470.000	34.63	9.06	34.21	47.50	56.98	68.20	11.22	Peak
@ 5547.750	34.70	9.10	34.23	83.05	92.62	---	---	Peak

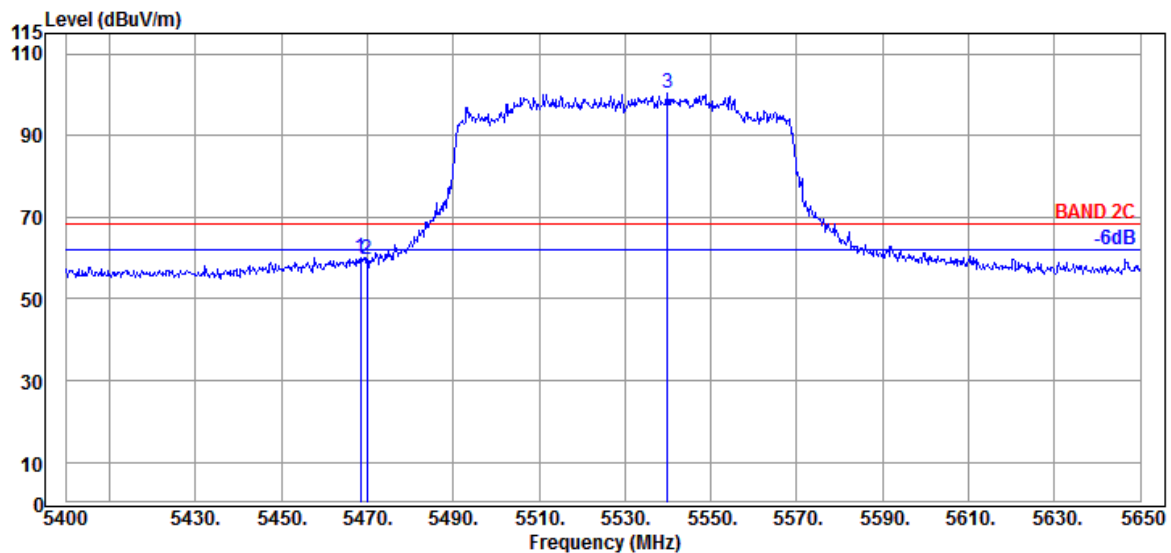

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.63	9.06	34.21	50.52	60.00	68.20	8.20	Peak
5470.000	34.63	9.06	34.21	50.38	59.86	68.20	8.34	Peak
@ 5540.000	34.70	9.09	34.22	90.89	100.46	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

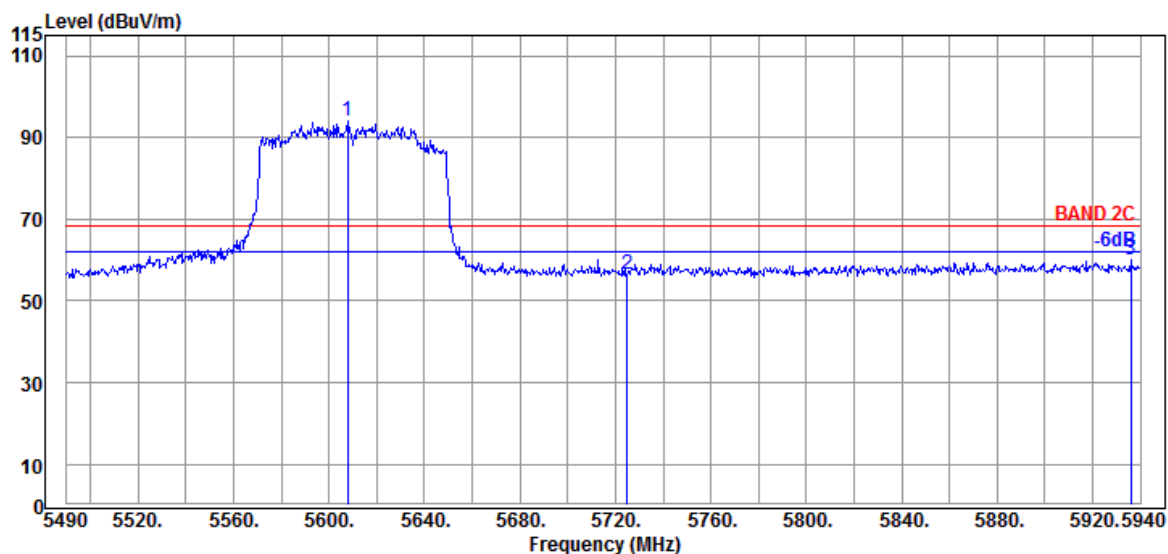

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.900	34.43	9.14	34.25	84.75	94.07	---	---	Peak
5724.900	34.90	9.20	34.30	46.72	56.52	68.20	11.68	Peak
5935.950	35.73	9.30	34.40	49.49	60.12	68.20	8.08	Peak

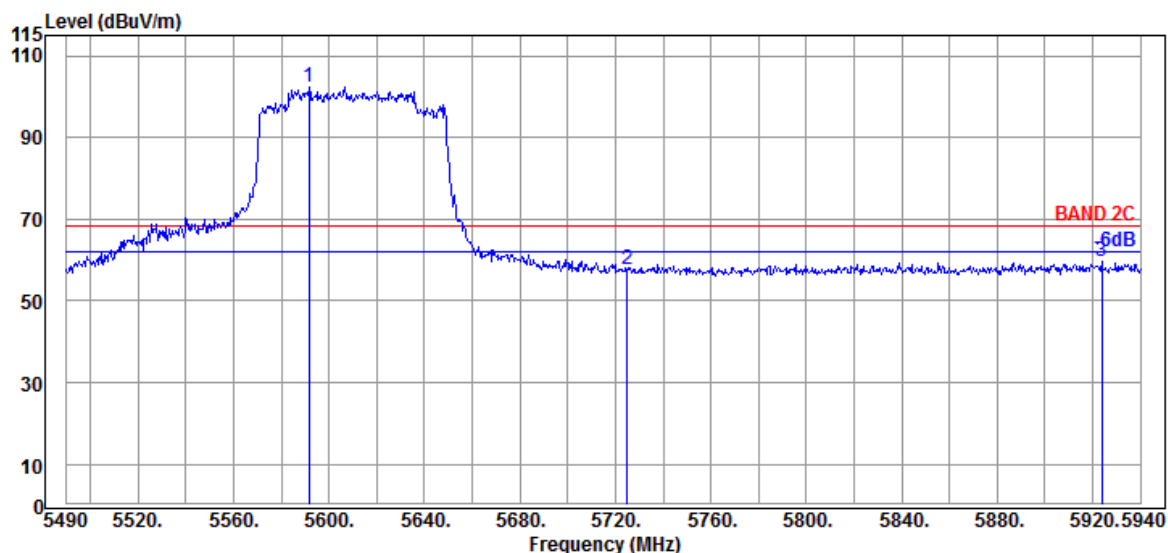

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5591.700	34.40	9.13	34.24	93.24	102.53	---	---	Peak
5724.900	34.90	9.20	34.30	47.87	57.67	68.20	10.53	Peak
5923.800	35.77	9.29	34.40	48.99	59.65	68.20	8.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Spot Check


● Test SKU #2 (with INPAQ Antenna and GM main board)

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

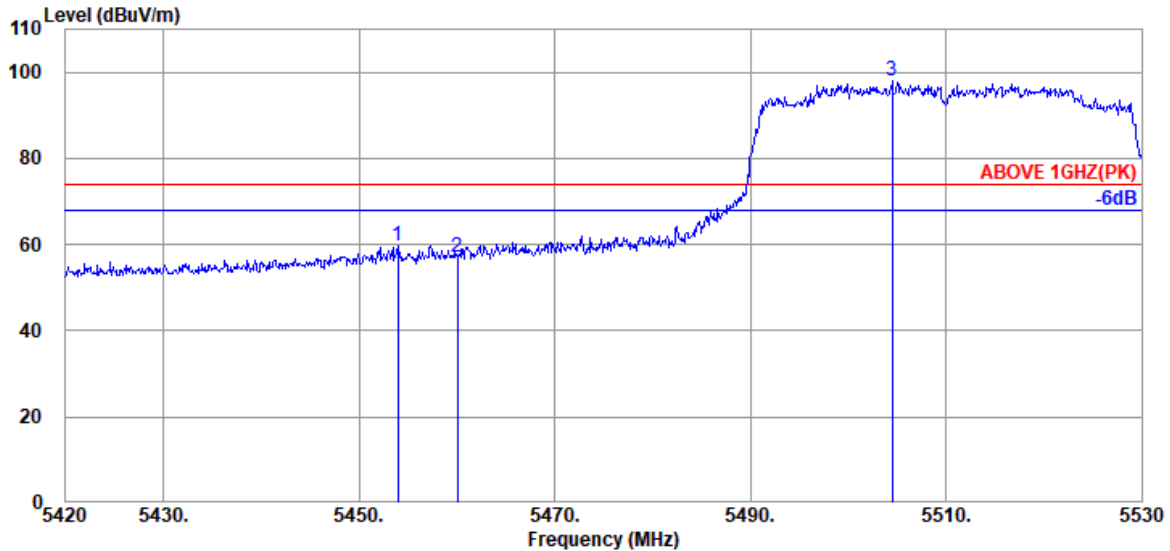

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.990	34.20	9.05	39.26	55.74	59.73	74.00	14.27	Peak
5460.040	34.20	9.05	39.26	52.94	56.93	74.00	17.07	Peak
@ 5504.480	34.10	9.08	39.26	94.24	98.16	---	---	Peak

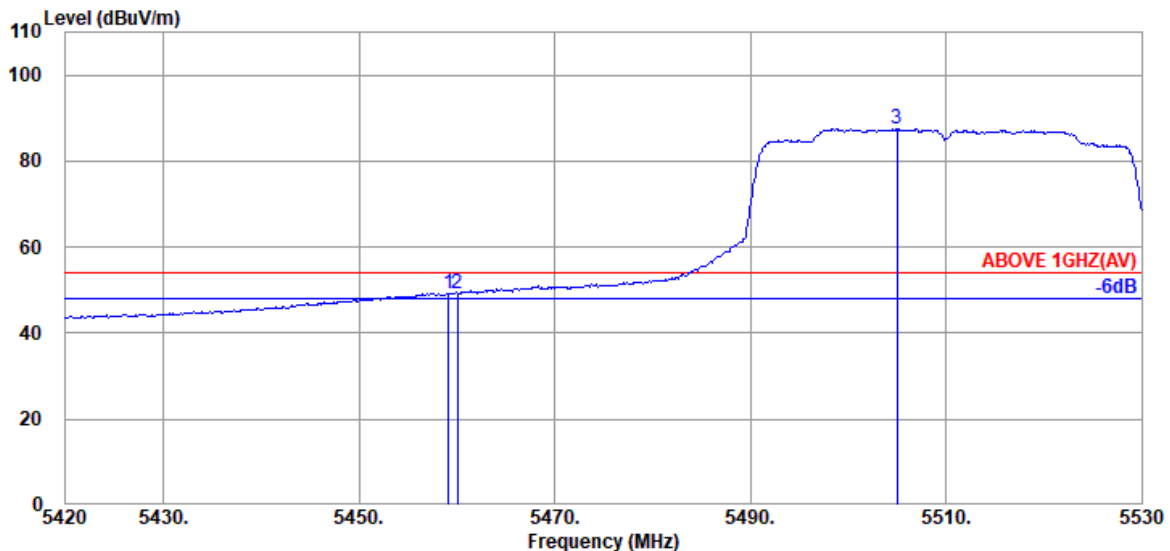

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.160	34.20	9.05	39.26	45.33	49.32	54.00	4.68	Average
5460.040	34.20	9.05	39.26	45.29	49.28	54.00	4.72	Average
@ 5505.030	34.10	9.08	39.26	83.51	87.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

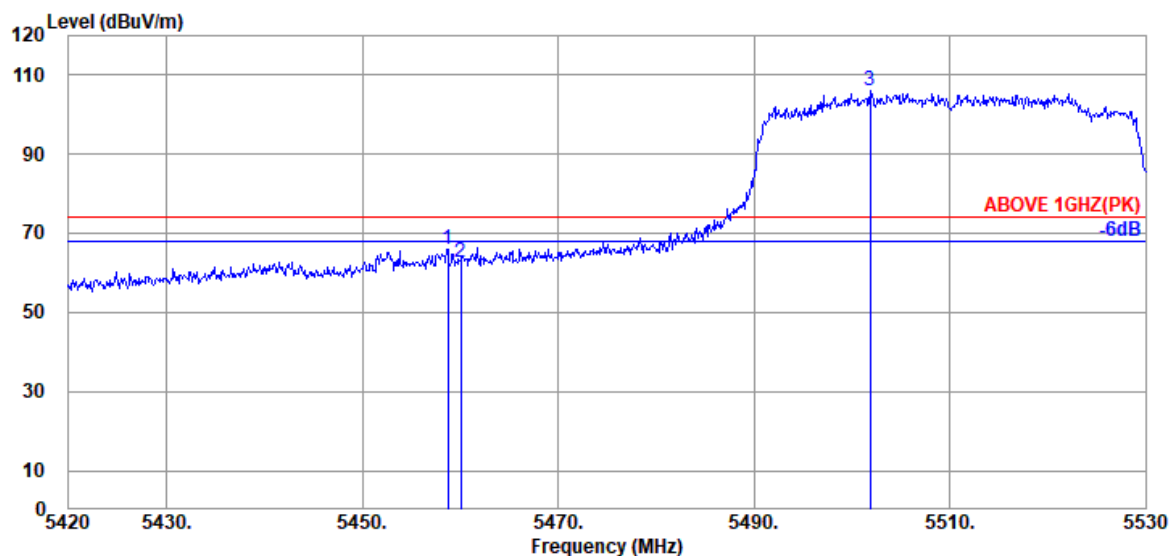

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.720	34.20	9.05	39.26	62.09	66.08	74.00	7.92	Peak
5460.040	34.20	9.05	39.26	58.59	62.58	74.00	11.42	Peak
@ 5501.840	34.10	9.08	39.26	102.26	106.18	---	---	Peak

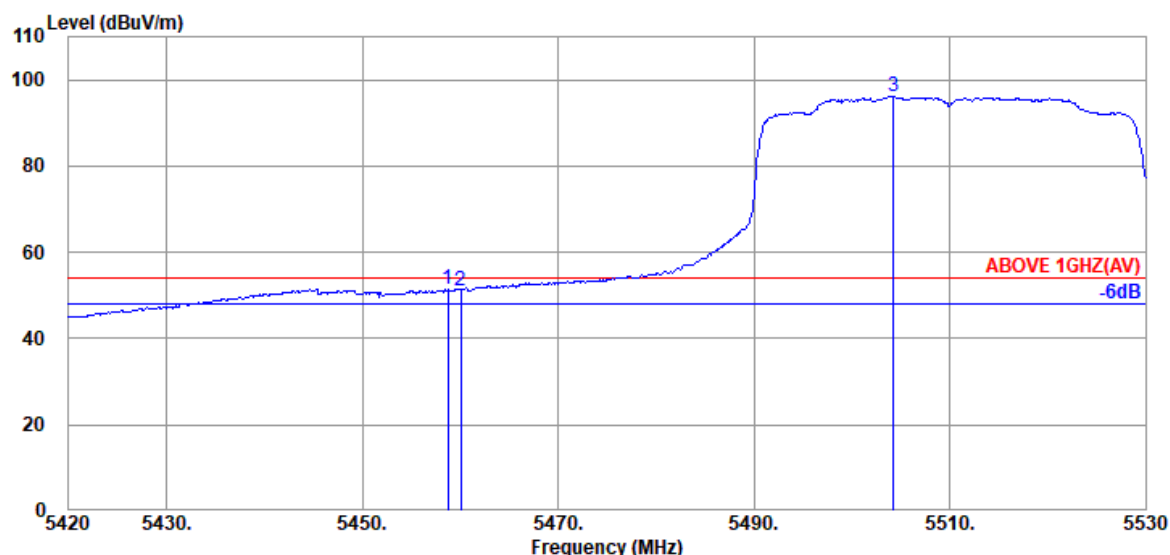

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.720	34.20	9.05	39.26	47.49	51.48	54.00	2.52	Average
5460.040	34.20	9.05	39.26	47.13	51.12	54.00	2.88	Average
@ 5504.260	34.10	9.08	39.26	92.30	96.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

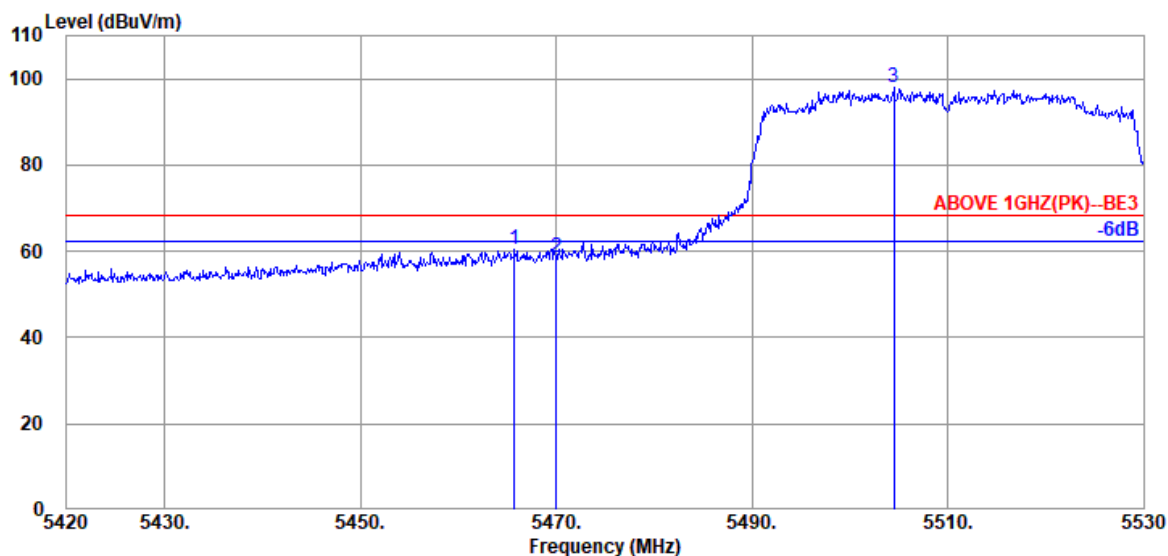

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.760	34.17	9.06	39.26	56.34	60.31	68.20	7.89	Peak
5470.050	34.17	9.06	39.26	54.71	58.68	68.20	9.52	Peak
@ 5504.480	34.10	9.08	39.26	94.24	98.16	---	---	Peak

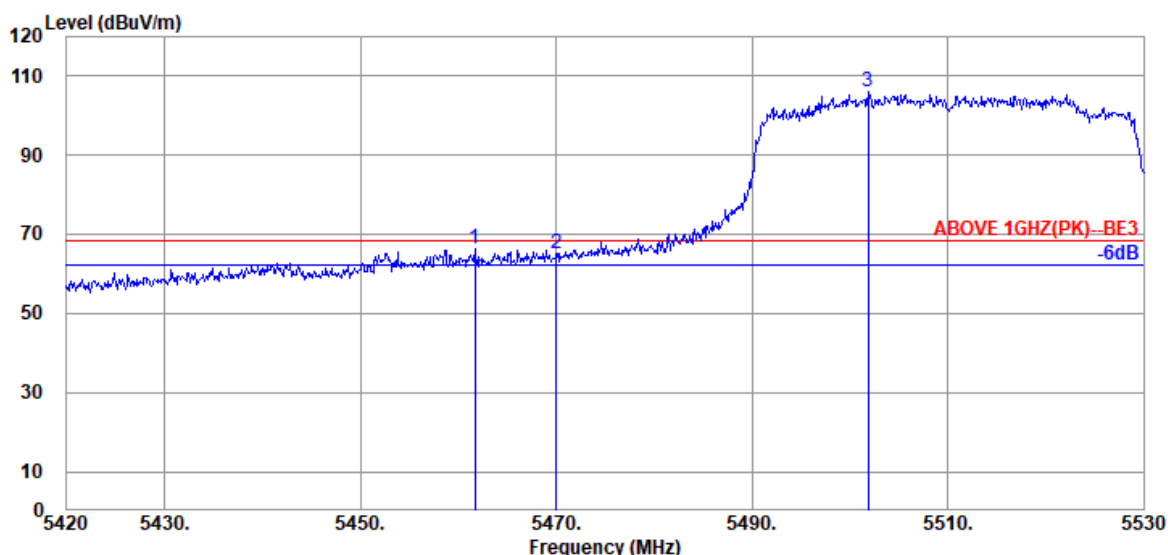

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.690	34.20	9.05	39.26	62.20	66.19	68.20	2.01	Peak
5470.050	34.17	9.06	39.26	61.02	64.99	68.20	3.21	Peak
@ 5501.840	34.10	9.08	39.26	102.26	106.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2210142

Report Number: EM-F220745

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Spot Check


● Test SKU #2 (with LUXSHARE-ICT Antenna and GM main board)

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

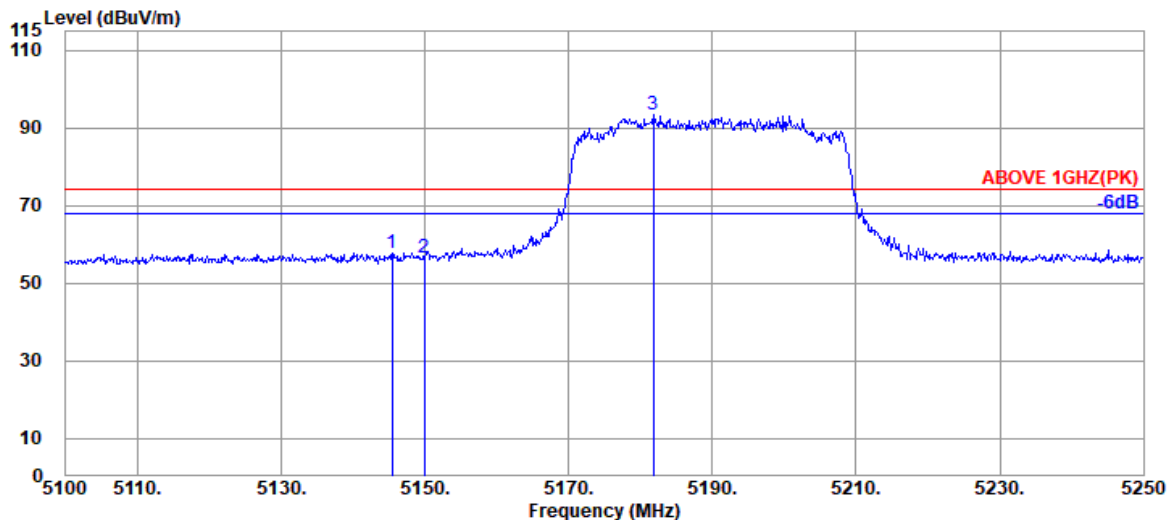

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.450	34.50	8.88	34.34	48.77	57.81	74.00	16.19	Peak
5149.950	34.50	8.88	34.34	47.47	56.51	74.00	17.49	Peak
@ 5181.750	34.63	8.90	34.32	84.30	93.51	---	---	Peak

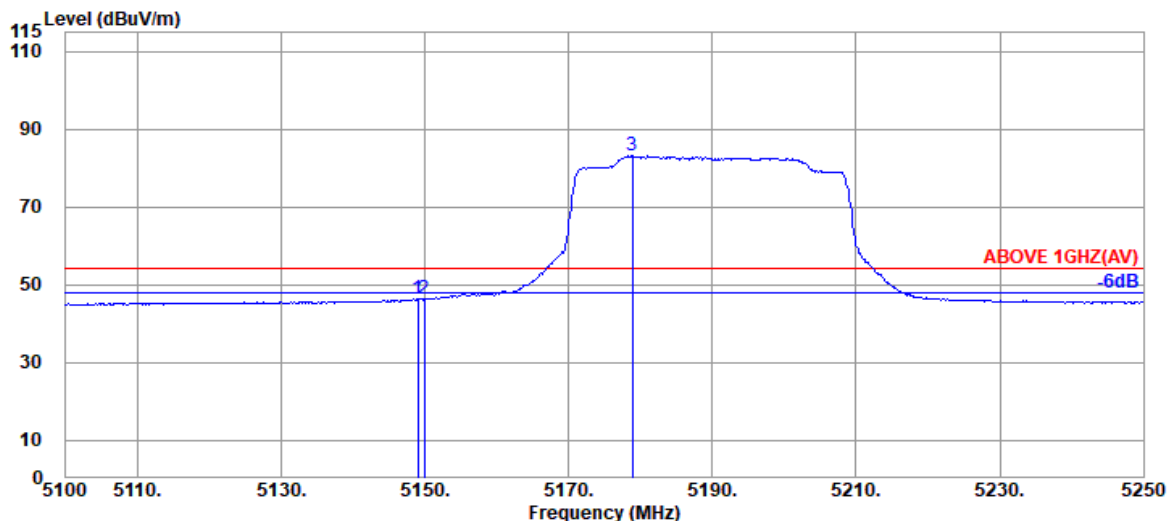


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	34.50	8.88	34.34	37.33	46.37	54.00	7.63	Average
5149.950	34.50	8.88	34.34	37.35	46.39	54.00	7.61	Average
@ 5178.900	34.63	8.90	34.32	73.92	83.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

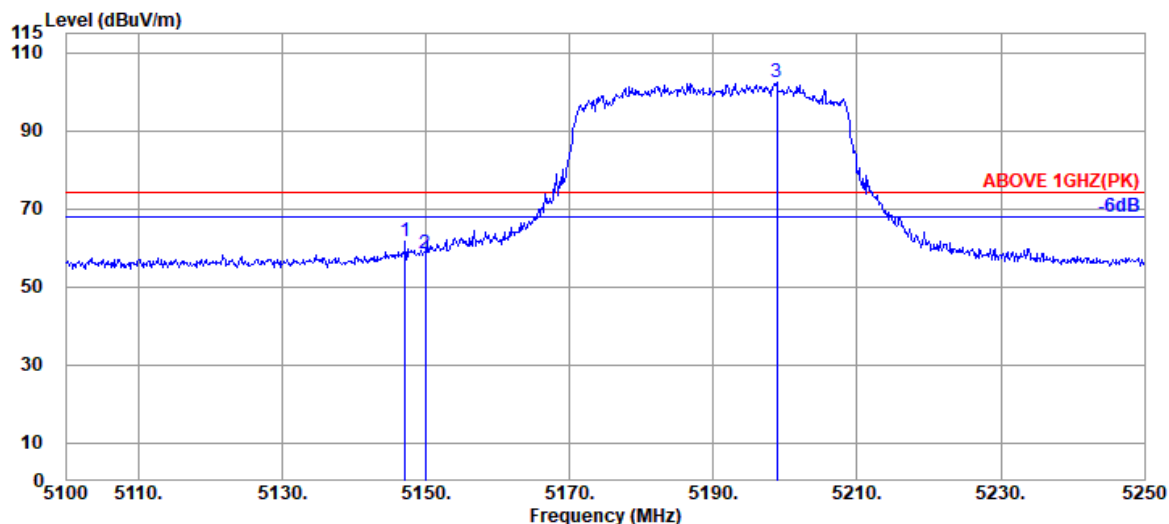

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.50	8.88	34.34	52.63	61.67	74.00	12.33	Peak
5149.950	34.50	8.88	34.34	49.60	58.64	74.00	15.36	Peak
@ 5198.850	34.70	8.91	34.32	93.02	102.31	---	---	Peak

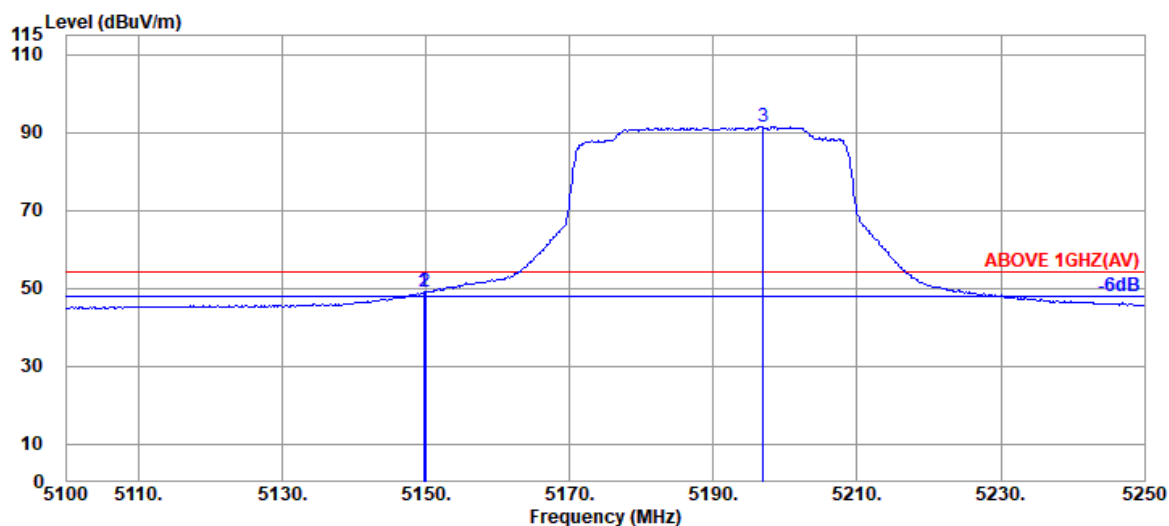

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.50	8.88	34.34	39.88	48.92	54.00	5.08	Average
5149.950	34.50	8.88	34.34	39.86	48.90	54.00	5.10	Average
@ 5196.900	34.70	8.91	34.32	82.11	91.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.