

## TABLE OF CONTENTS


|                                                                             |            |
|-----------------------------------------------------------------------------|------------|
| <b>A.1 CONDUCTED EMISSION .....</b>                                         | <b>2</b>   |
| <b>A.2 RADIATED EMISSION .....</b>                                          | <b>6</b>   |
| A.2.1 Emissions within Restricted Frequency Bands.....                      | 6          |
| A.2.2 Emissions outside the frequency band.....                             | 250        |
| A.2.3 Emissions in Non-restricted Frequency Bands.....                      | 285        |
| <b>A.3 MAXIMUM POWER SPECTRAL DENSITY .....</b>                             | <b>286</b> |
| A.3.1 Power Spectral Density Result .....                                   | 286        |
| A.3.2 Measurement Plots .....                                               | 296        |
| <b>A.4 MAXIMUM CONDUCTED OUTPUT POWER.....</b>                              | <b>330</b> |
| A.4.1 Conducted Output Power Result .....                                   | 330        |
| A.4.2 Measurement Plots .....                                               | 420        |
| <b>A.5 EMISSION/OCCUPIED BANDWIDTH.....</b>                                 | <b>567</b> |
| A.5.1 Emission/Occupied Bandwidth Result .....                              | 567        |
| A.5.2 Measurement Plots .....                                               | 569        |
| <b>A.6 UNDESIRABLE EMISSION LIMITS: SPURIOUS EMISSION (CONDUCTED) .....</b> | <b>578</b> |
| <b>A.7 IN-BAND EMISSION (CHANNEL MASK).....</b>                             | <b>588</b> |
| <b>A.8 CONTENTION BASED PROTOCOL .....</b>                                  | <b>634</b> |
| A.8.1 Contention-based Protocol.....                                        | 634        |
| A.8.2 Measurement Plots .....                                               | 639        |

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

## A.1 CONDUCTED EMISSION

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2024/11/06                    | Temp./Hum. | 24°C/62% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Nick Du  |
| Antenna      | INPAQ                         |            |          |

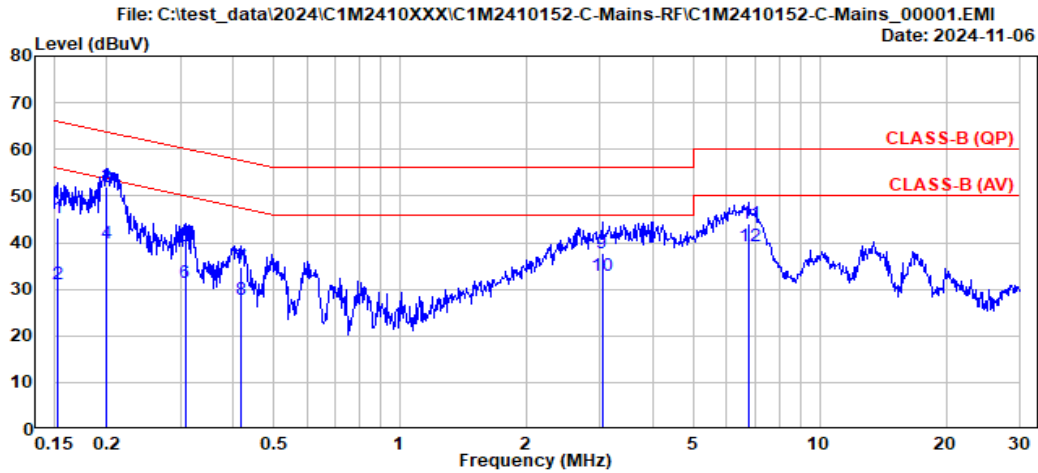

Site No. : No.8 Shielded Room  
Instrument 1 : Receiver ESR(774)  
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)  
Limit : CLASS-B (QP)  
Environment : 25°C/62%  
EUT Model : 17Z90T  
Test Mode : Operating  
INPAQ

Data No. : 1  
Phase : Neutral  
Test Rating : 120Vac/60Hz  
Engineer : Nick Du


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.152          | 10.27                 | 0.03                  | 9.85                  | 25.20             | 45.35                       | 65.88            | 20.53          | QP      |
| 2  | 0.152          | 10.27                 | 0.03                  | 9.85                  | 10.91             | 31.06                       | 55.88            | 24.82          | Average |
| 3  | 0.199          | 10.26                 | 0.03                  | 9.85                  | 31.82             | 51.96                       | 63.64            | 11.68          | QP      |
| 4  | 0.199          | 10.26                 | 0.03                  | 9.85                  | 19.61             | 39.75                       | 53.64            | 13.89          | Average |
| 5  | 0.307          | 10.26                 | 0.03                  | 9.85                  | 19.17             | 39.31                       | 60.04            | 20.73          | QP      |
| 6  | 0.307          | 10.26                 | 0.03                  | 9.85                  | 11.19             | 31.33                       | 50.04            | 18.71          | Average |
| 7  | 0.419          | 10.26                 | 0.03                  | 9.85                  | 14.53             | 34.67                       | 57.47            | 22.80          | QP      |
| 8  | 0.419          | 10.26                 | 0.03                  | 9.85                  | 7.66              | 27.80                       | 47.47            | 19.67          | Average |
| 9  | 3.030          | 10.32                 | 0.07                  | 9.86                  | 17.45             | 37.70                       | 56.00            | 18.30          | QP      |
| 10 | 3.030          | 10.32                 | 0.07                  | 9.86                  | 12.72             | 32.97                       | 46.00            | 13.03          | Average |
| 11 | 6.793          | 10.47                 | 0.11                  | 9.87                  | 23.61             | 44.06                       | 60.00            | 15.94          | QP      |
| 12 | 6.793          | 10.47                 | 0.11                  | 9.87                  | 18.83             | 39.28                       | 50.00            | 10.72          | Average |

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2024/11/06                    | Temp./Hum. | 24°C/62% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Nick Du  |
| Antenna      | INPAQ                         |            |          |

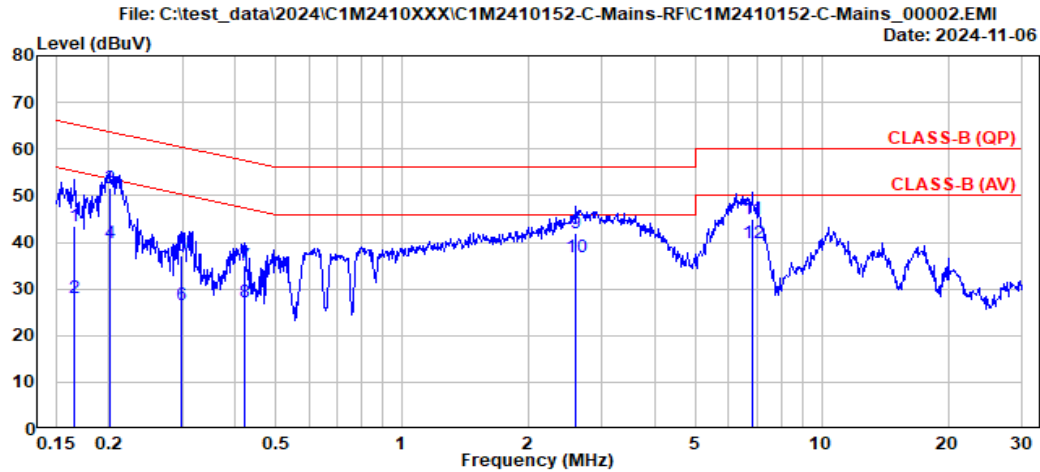

|              |                                       |             |               |
|--------------|---------------------------------------|-------------|---------------|
| Site No.     | : No.8 Shielded Room                  | Data No.    | : 2           |
| Instrument 1 | : Receiver ESR(774)                   |             |               |
| Instrument 2 | : ENV432 (567)(A) CE-08 ESH3-Z2 (354) |             |               |
| Limit        | : CLASS-B (QP)                        | Phase       | : Line        |
| Environment  | : 25°C/62%                            | Test Rating | : 120Vac/60Hz |
| EUT Model    | : 17290T                              | Engineer    | : Nick Du     |
| Test Mode    | : Operating                           |             |               |
|              | INPAQ                                 |             |               |


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.166          | 10.26                 | 0.03                  | 9.85                  | 23.36             | 43.50                       | 65.17            | 21.67          | QP      |
| 2  | 0.166          | 10.26                 | 0.03                  | 9.85                  | 8.05              | 28.19                       | 55.17            | 26.98          | Average |
| 3  | 0.202          | 10.25                 | 0.03                  | 9.85                  | 31.55             | 51.68                       | 63.52            | 11.84          | QP      |
| 4  | 0.202          | 10.25                 | 0.03                  | 9.85                  | 19.74             | 39.87                       | 53.52            | 13.65          | Average |
| 5  | 0.297          | 10.25                 | 0.03                  | 9.85                  | 16.97             | 37.10                       | 60.33            | 23.23          | QP      |
| 6  | 0.297          | 10.25                 | 0.03                  | 9.85                  | 6.53              | 26.66                       | 50.33            | 23.67          | Average |
| 7  | 0.421          | 10.25                 | 0.03                  | 9.85                  | 14.85             | 34.98                       | 57.43            | 22.45          | QP      |
| 8  | 0.421          | 10.25                 | 0.03                  | 9.85                  | 6.92              | 27.05                       | 47.43            | 20.38          | Average |
| 9  | 2.596          | 10.29                 | 0.07                  | 9.86                  | 21.64             | 41.86                       | 56.00            | 14.14          | QP      |
| 10 | 2.596          | 10.29                 | 0.07                  | 9.86                  | 16.49             | 36.71                       | 46.00            | 9.29           | Average |
| 11 | 6.827          | 10.39                 | 0.11                  | 9.87                  | 24.66             | 45.03                       | 60.00            | 14.97          | QP      |
| 12 | 6.827          | 10.39                 | 0.11                  | 9.87                  | 19.60             | 39.97                       | 50.00            | 10.03          | Average |

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2024/11/06                    | Temp./Hum. | 24°C/62% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Nick Du  |
| Antenna      | LUXSHARE-ICT                  |            |          |

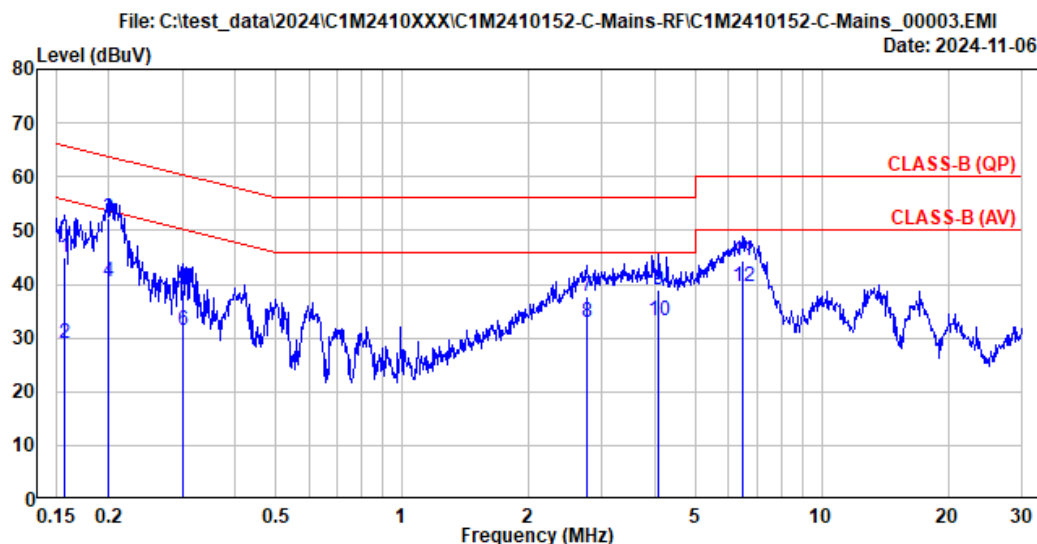

|              |                                       |             |               |
|--------------|---------------------------------------|-------------|---------------|
| Site No.     | : No.8 Shielded Room                  | Data No.    | : 3           |
| Instrument 1 | : Receiver ESR(774)                   |             |               |
| Instrument 2 | : ENV432 (567)(A) CE-08 ESH3-Z2 (354) |             |               |
| Limit        | : CLASS-B (QP)                        | Phase       | : Neutral     |
| Environment  | : 25°C/62%                            | Test Rating | : 120Vac/60Hz |
| EUT Model    | : 17290T                              | Engineer    | : Nick Du     |
| Test Mode    | : Operating LUXSHARE                  |             |               |


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.157          | 10.27                 | 0.03                  | 9.85                  | 24.72             | 44.87                       | 65.63            | 20.76          | QP      |
| 2  | 0.157          | 10.27                 | 0.03                  | 9.85                  | 8.81              | 28.96                       | 55.63            | 26.67          | Average |
| 3  | 0.200          | 10.26                 | 0.03                  | 9.85                  | 31.97             | 52.11                       | 63.60            | 11.49          | QP      |
| 4  | 0.200          | 10.26                 | 0.03                  | 9.85                  | 20.21             | 40.35                       | 53.60            | 13.25          | Average |
| 5  | 0.301          | 10.26                 | 0.03                  | 9.85                  | 18.93             | 39.07                       | 60.20            | 21.13          | QP      |
| 6  | 0.301          | 10.26                 | 0.03                  | 9.85                  | 11.36             | 31.50                       | 50.20            | 18.70          | Average |
| 7  | 2.756          | 10.31                 | 0.07                  | 9.86                  | 17.62             | 37.86                       | 56.00            | 18.14          | QP      |
| 8  | 2.756          | 10.31                 | 0.07                  | 9.86                  | 12.53             | 32.77                       | 46.00            | 13.23          | Average |
| 9  | 4.086          | 10.35                 | 0.08                  | 9.86                  | 18.52             | 38.81                       | 56.00            | 17.19          | QP      |
| 10 | 4.086          | 10.35                 | 0.08                  | 9.86                  | 12.90             | 33.19                       | 46.00            | 12.81          | Average |
| 11 | 6.463          | 10.46                 | 0.11                  | 9.87                  | 23.98             | 44.42                       | 60.00            | 15.58          | QP      |
| 12 | 6.463          | 10.46                 | 0.11                  | 9.87                  | 19.16             | 39.60                       | 50.00            | 10.40          | Average |

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2024/11/06                    | Temp./Hum. | 24°C/62% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Nick Du  |
| Antenna      | LUXSHARE-ICT                  |            |          |

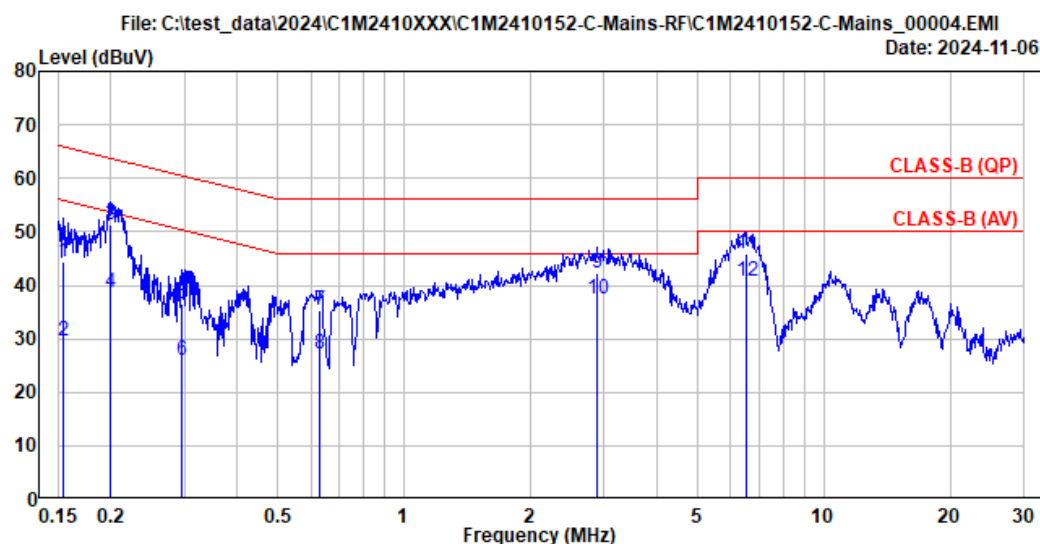

|              |                                       |             |               |
|--------------|---------------------------------------|-------------|---------------|
| Site No.     | : No.8 Shielded Room                  | Data No.    | : 4           |
| Instrument 1 | : Receiver ESR(774)                   |             |               |
| Instrument 2 | : ENV432 (567)(A) CE-08 ESH3-Z2 (354) |             |               |
| Limit        | : CLASS-B (QP)                        | Phase       | : Line        |
| Environment  | : 25°C/62%                            | Test Rating | : 120Vac/60Hz |
| EUT Model    | : 17290T                              | Engineer    | : Nick Du     |
| Test Mode    | : Operating<br>LUXSHARE               |             |               |

|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.154          | 10.26                 | 0.03                  | 9.85                  | 24.28             | 44.42                       | 65.79            | 21.37          | QP      |
| 2  | 0.154          | 10.26                 | 0.03                  | 9.85                  | 9.31              | 29.45                       | 55.79            | 26.34          | Average |
| 3  | 0.199          | 10.25                 | 0.03                  | 9.85                  | 31.20             | 51.33                       | 63.64            | 12.31          | QP      |
| 4  | 0.199          | 10.25                 | 0.03                  | 9.85                  | 18.48             | 38.61                       | 53.64            | 15.03          | Average |
| 5  | 0.295          | 10.25                 | 0.03                  | 9.85                  | 16.48             | 36.61                       | 60.37            | 23.76          | QP      |
| 6  | 0.295          | 10.25                 | 0.03                  | 9.85                  | 5.83              | 25.96                       | 50.37            | 24.41          | Average |
| 7  | 0.627          | 10.25                 | 0.03                  | 9.85                  | 15.04             | 35.17                       | 56.00            | 20.83          | QP      |
| 8  | 0.627          | 10.25                 | 0.03                  | 9.85                  | 7.07              | 27.20                       | 46.00            | 18.80          | Average |
| 9  | 2.882          | 10.29                 | 0.07                  | 9.86                  | 22.18             | 42.40                       | 56.00            | 13.60          | QP      |
| 10 | 2.882          | 10.29                 | 0.07                  | 9.86                  | 17.08             | 37.30                       | 46.00            | 8.70           | Average |
| 11 | 6.527          | 10.38                 | 0.11                  | 9.87                  | 25.56             | 45.92                       | 60.00            | 14.08          | QP      |
| 12 | 6.527          | 10.38                 | 0.11                  | 9.87                  | 20.54             | 40.90                       | 50.00            | 9.10           | Average |

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

## A.2 RADIATED EMISSION

|              |                               |            |                |
|--------------|-------------------------------|------------|----------------|
| Test Date    | 2024/10/26 ~ 11/15            | Temp./Hum. | 23~24°C/60~64% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Hua Wu         |

### A.2.1 Emissions within Restricted Frequency Bands


#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

Antenna: INPAQ

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6745MHz |

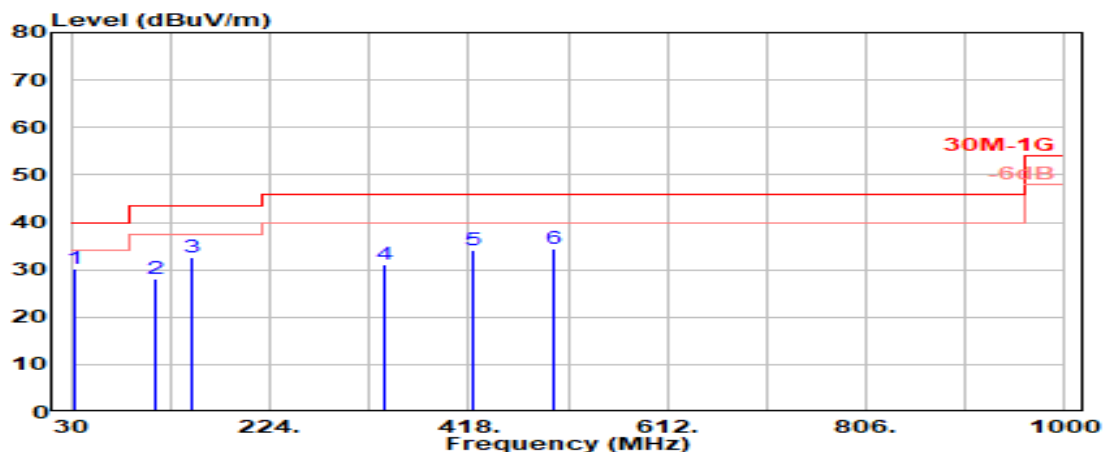


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 33.500                   | 22.47                 | 1.50            | 26.48                  | 32.72             | 30.20                   | 40.00           | 9.80        | Peak     |
| 112.000                  | 17.36                 | 2.76            | 26.21                  | 34.30             | 28.21                   | 43.50           | 15.29       | Peak     |
| 147.500                  | 16.49                 | 3.17            | 26.01                  | 39.10             | 32.75                   | 43.50           | 10.75       | Peak     |
| 336.000                  | 19.58                 | 5.18            | 25.94                  | 32.21             | 31.04                   | 46.00           | 14.96       | Peak     |
| 422.500                  | 21.53                 | 6.13            | 26.61                  | 32.93             | 33.98                   | 46.00           | 12.02       | Peak     |
| 501.000                  | 22.82                 | 6.76            | 27.13                  | 31.98             | 34.44                   | 46.00           | 11.56       | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6745MHz |

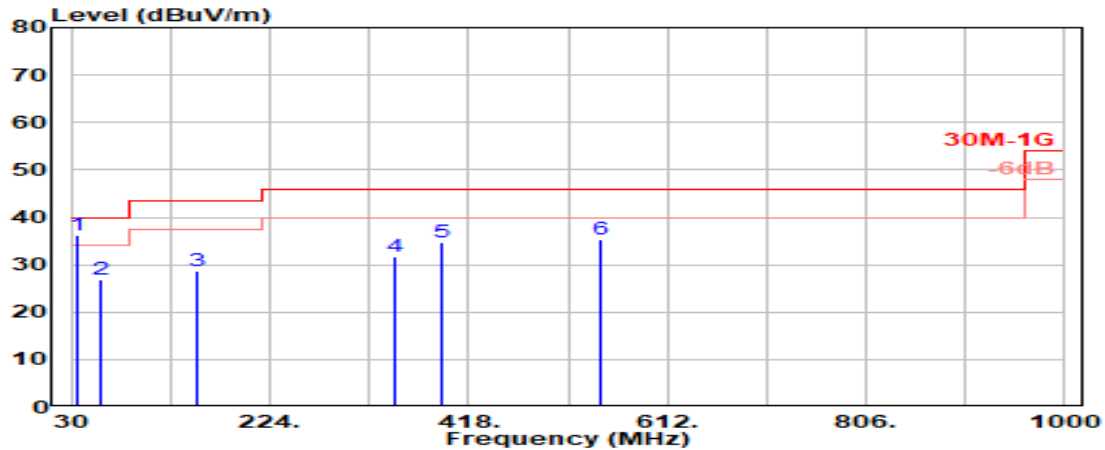

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 35.000                   | 21.86                 | 1.53            | 26.48                  | 39.43             | 36.34                   | 40.00           | 3.66        | Peak     |
| 58.500                   | 12.14                 | 1.98            | 26.42                  | 39.10             | 26.80                   | 40.00           | 13.20       | Peak     |
| 152.500                  | 16.10                 | 3.22            | 25.99                  | 35.20             | 28.54                   | 43.50           | 14.96       | Peak     |
| 347.000                  | 19.88                 | 5.32            | 26.03                  | 32.62             | 31.79                   | 46.00           | 14.21       | Peak     |
| 391.000                  | 20.89                 | 5.83            | 26.37                  | 34.33             | 34.68                   | 46.00           | 11.32       | Peak     |
| 546.000                  | 23.42                 | 6.92            | 27.26                  | 32.35             | 35.44                   | 46.00           | 10.56       | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

Antenna: LUXSHARE-ICT

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6745MHz |

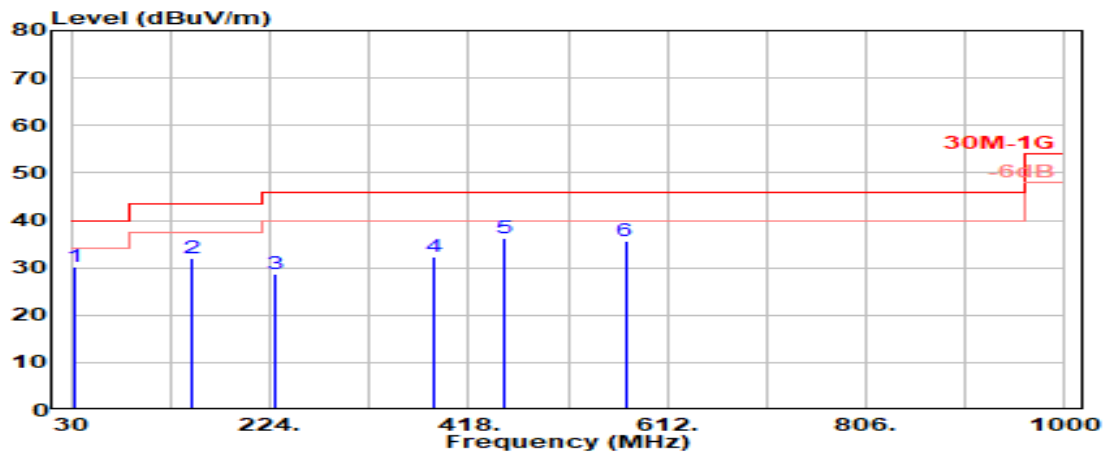


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 33.500                   | 22.47                 | 1.50            | 26.48                  | 32.59             | 30.07                   | 40.00           | 9.93        | Peak     |
| 149.000                  | 16.37                 | 3.19            | 26.00                  | 38.36             | 31.92                   | 43.50           | 11.58       | Peak     |
| 228.000                  | 16.64                 | 4.03            | 25.73                  | 33.85             | 28.79                   | 46.00           | 17.21       | Peak     |
| 384.500                  | 20.76                 | 5.76            | 26.33                  | 32.11             | 32.30                   | 46.00           | 13.70       | Peak     |
| 454.000                  | 22.06                 | 6.40            | 26.83                  | 34.45             | 36.08                   | 46.00           | 9.92        | Peak     |
| 571.000                  | 23.73                 | 7.01            | 27.33                  | 32.19             | 35.60                   | 46.00           | 10.40       | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6745MHz |

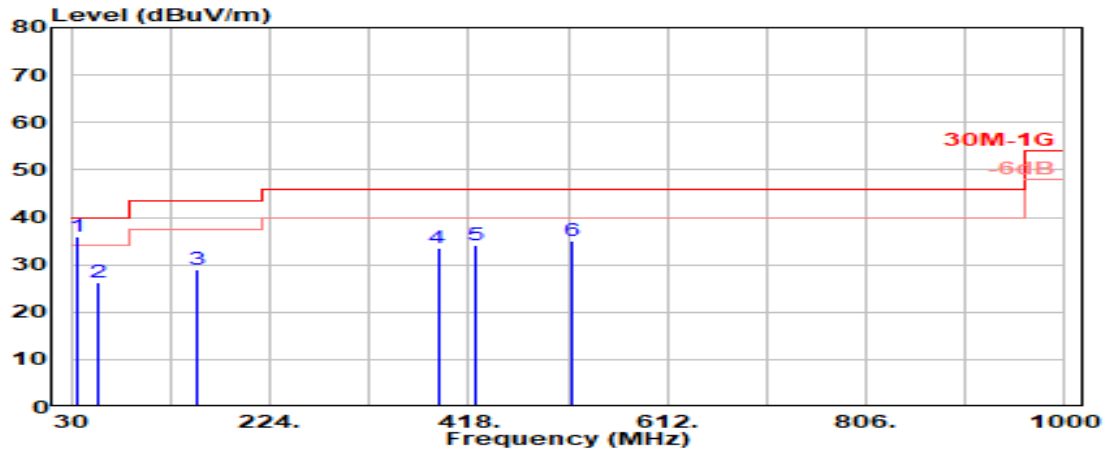

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 35.000                   | 21.86                 | 1.53            | 26.48                  | 38.92             | 35.83                   | 40.00           | 4.17        | Peak     |
| 57.500                   | 12.36                 | 1.96            | 26.43                  | 38.36             | 26.26                   | 40.00           | 13.74       | Peak     |
| 154.000                  | 16.03                 | 3.24            | 25.98                  | 35.62             | 28.91                   | 43.50           | 14.59       | Peak     |
| 388.000                  | 20.83                 | 5.80            | 26.35                  | 33.20             | 33.47                   | 46.00           | 12.53       | Peak     |
| 424.500                  | 21.56                 | 6.15            | 26.62                  | 33.05             | 34.14                   | 46.00           | 11.86       | Peak     |
| 518.000                  | 23.07                 | 6.83            | 27.18                  | 32.33             | 35.05                   | 46.00           | 10.95       | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

### A.2.1.3 Band Edge

- OFDM Modulation


Antenna: INPAQ

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

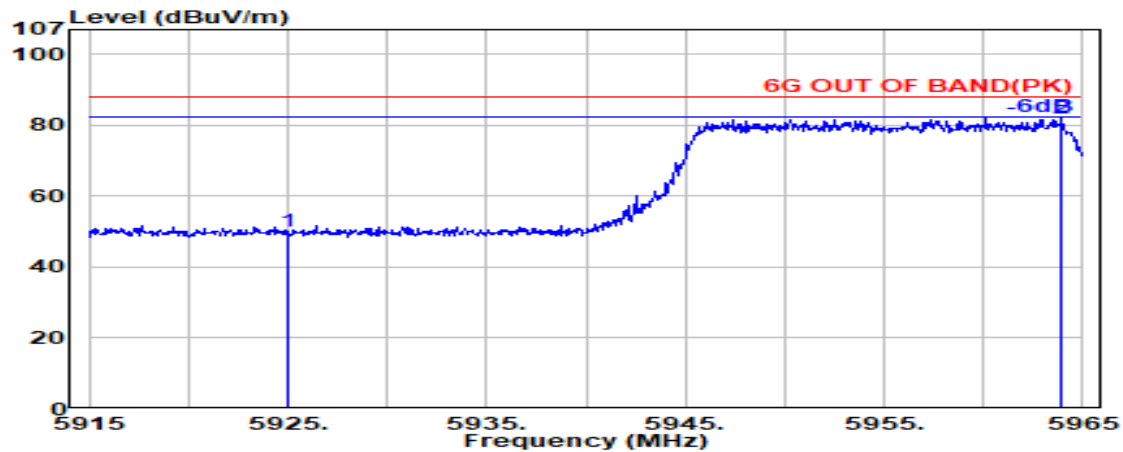

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.16             | 49.98                   | 88.20           | 38.22       | Peak     |
| @ 5963.900               | 34.27                 | 9.01            | 34.38                  | 73.01             | 81.91                   | ---             | ---         | Peak     |

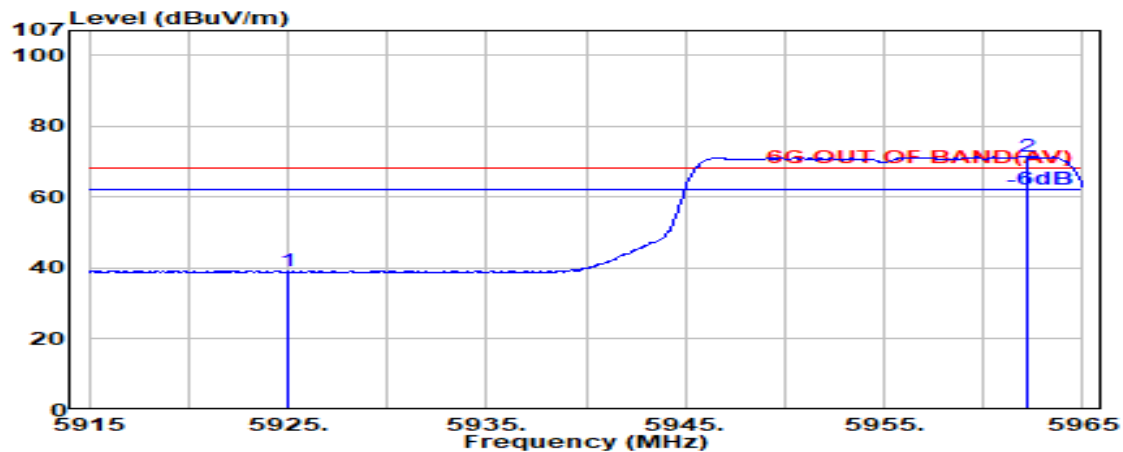

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.23             | 39.05                   | 68.20           | 29.15       | Average  |
| @ 5962.150               | 34.28                 | 9.01            | 34.38                  | 62.49             | 71.39                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

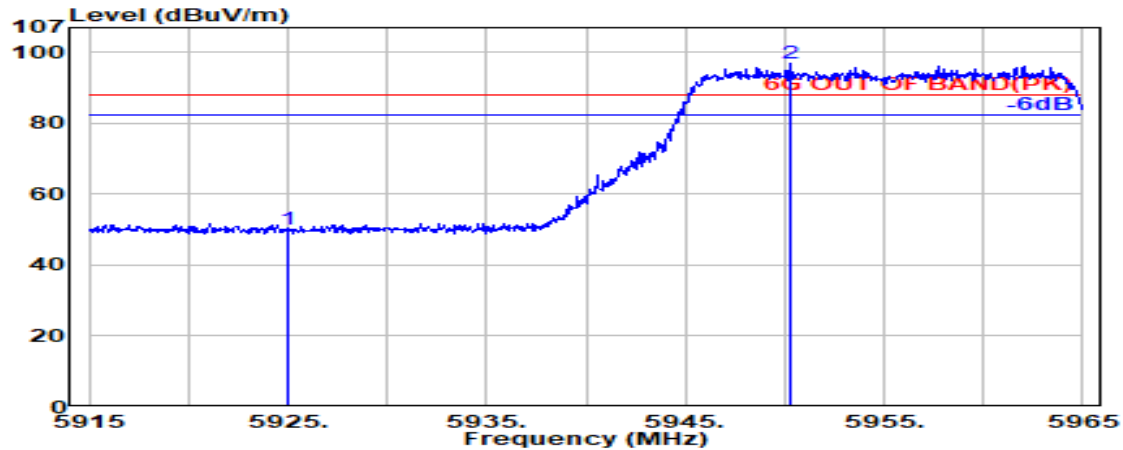

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.17             | 50.00                   | 88.20           | 38.20       | Peak     |
| @ 5950.300               | 34.30                 | 9.00            | 34.38                  | 88.11             | 97.03                   | ---             | ---         | Peak     |

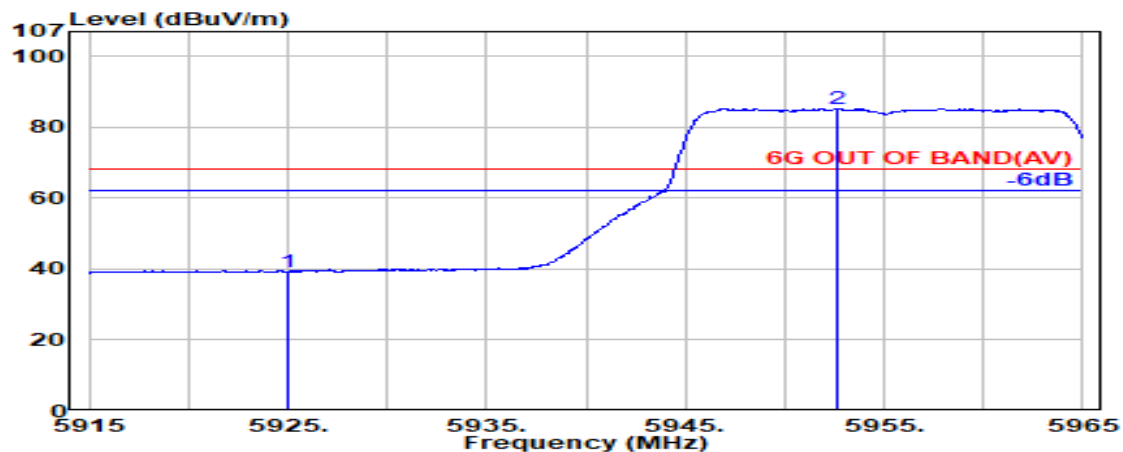

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.42             | 39.24                   | 68.20           | 28.96       | Average  |
| @ 5952.650               | 34.29                 | 9.00            | 34.38                  | 76.34             | 85.26                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

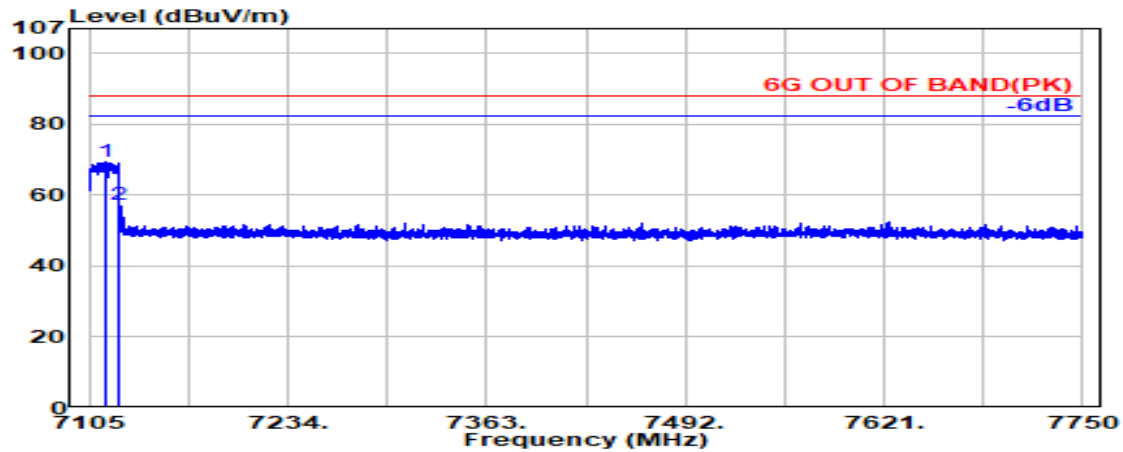

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7115.400               | 35.86                 | 9.79            | 34.48                  | 58.44             | 69.62                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 46.06             | 57.27                   | 88.20           | 30.93       | Peak     |

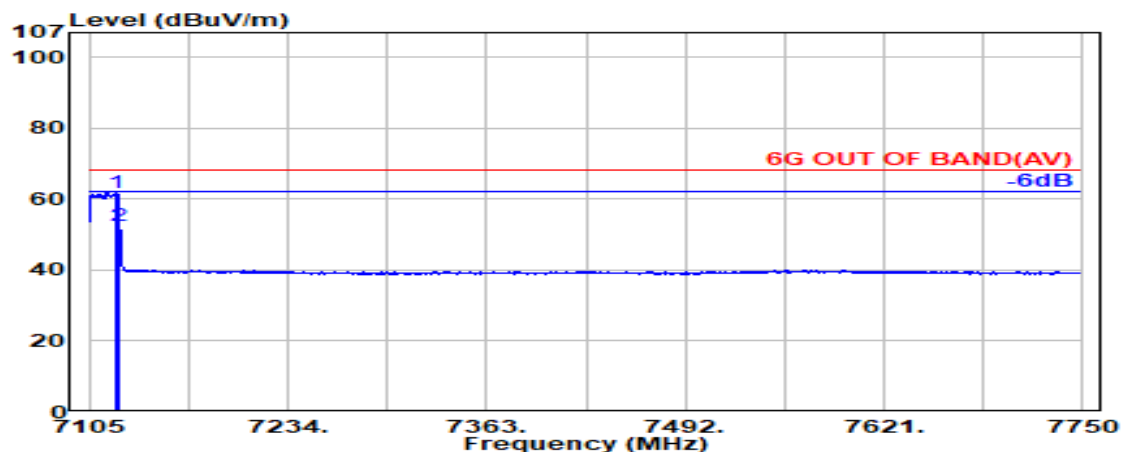

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7122.400               | 35.89                 | 9.80            | 34.49                  | 50.47             | 61.67                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 41.39             | 52.60                   | 68.20           | 15.60       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

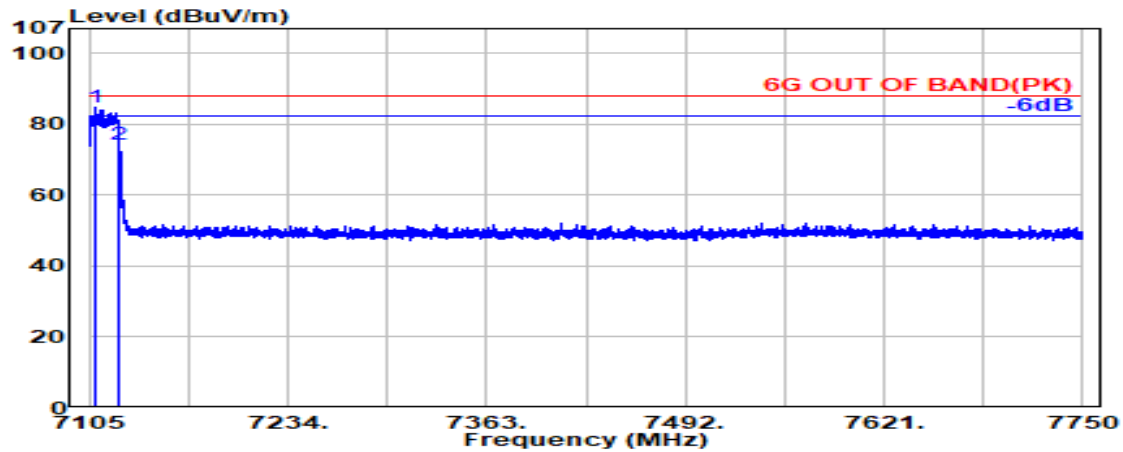

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7108.900               | 35.84                 | 9.79            | 34.48            | 73.52             | 84.67                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 63.21             | 74.42                   | 88.20           | 13.78       | Peak     |

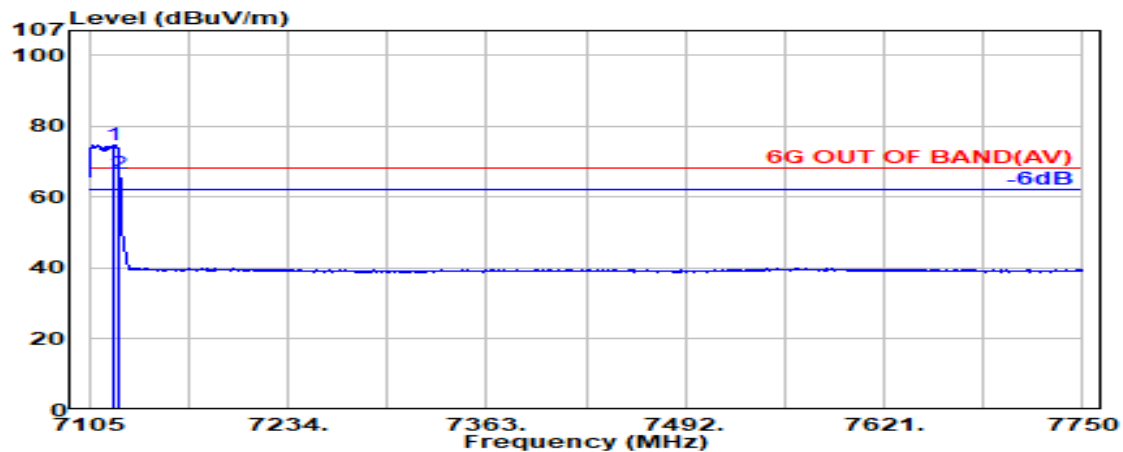

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7121.500               | 35.89                 | 9.80            | 34.49            | 63.40             | 74.60                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 55.26             | 66.47                   | 68.20           | 1.73        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

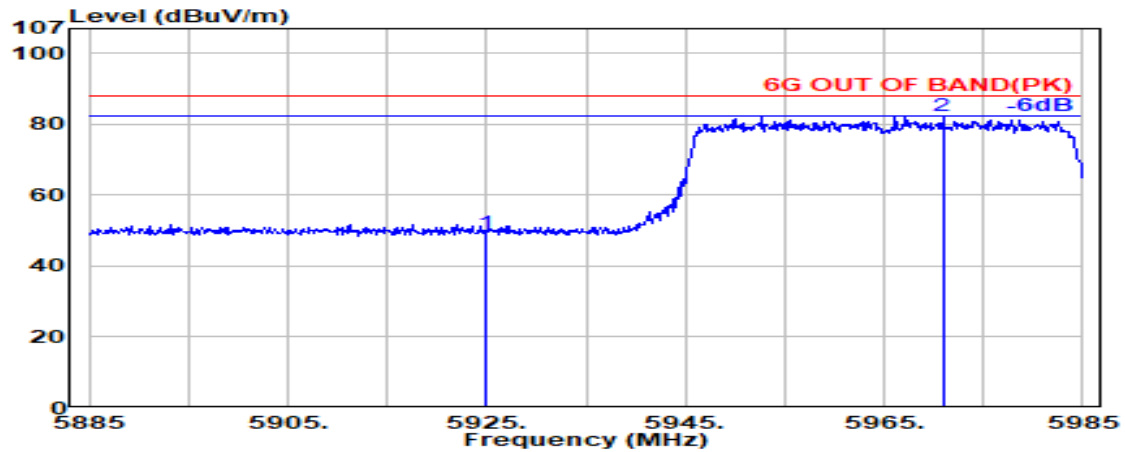

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.31             | 49.13                   | 88.20           | 39.07       | Peak     |
| @ 5970.900               | 34.26                 | 9.01            | 34.39            | 73.63             | 82.52                   | ---             | ---         | Peak     |

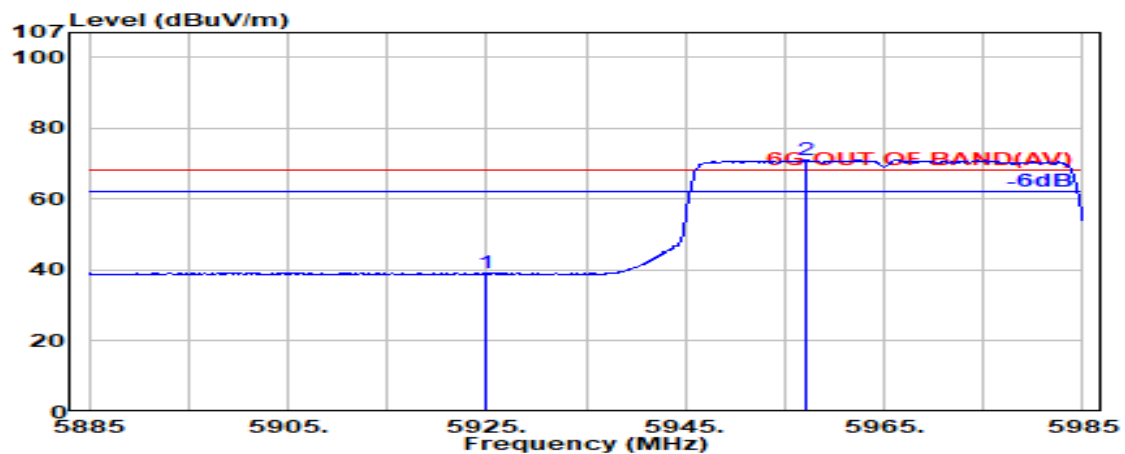

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.16             | 38.99                   | 68.20           | 29.21       | Average  |
| @ 5957.100               | 34.29                 | 9.01            | 34.38            | 62.29             | 71.20                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

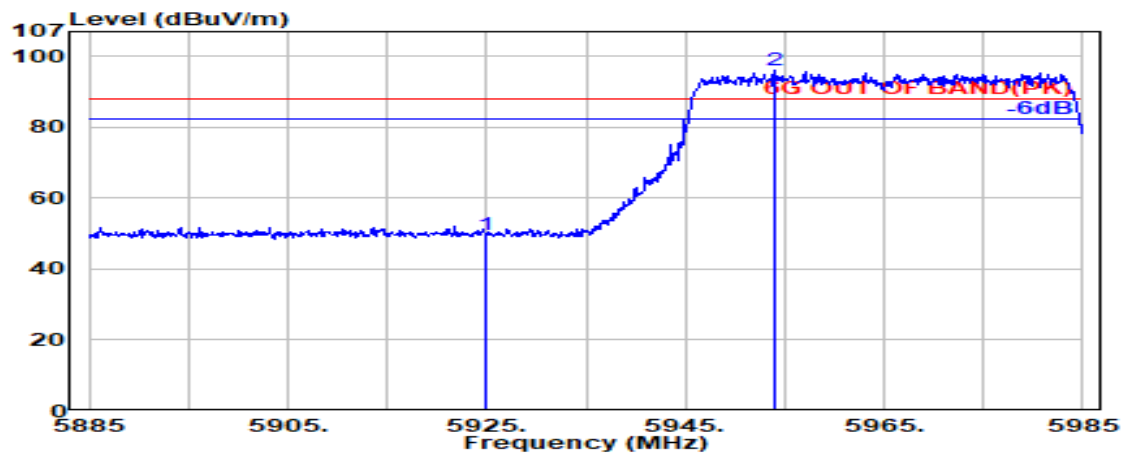

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.93             | 49.75                   | 88.20           | 38.45       | Peak     |
| @ 5954.000               | 34.29                 | 9.01            | 34.38                  | 87.36             | 96.28                   | ---             | ---         | Peak     |

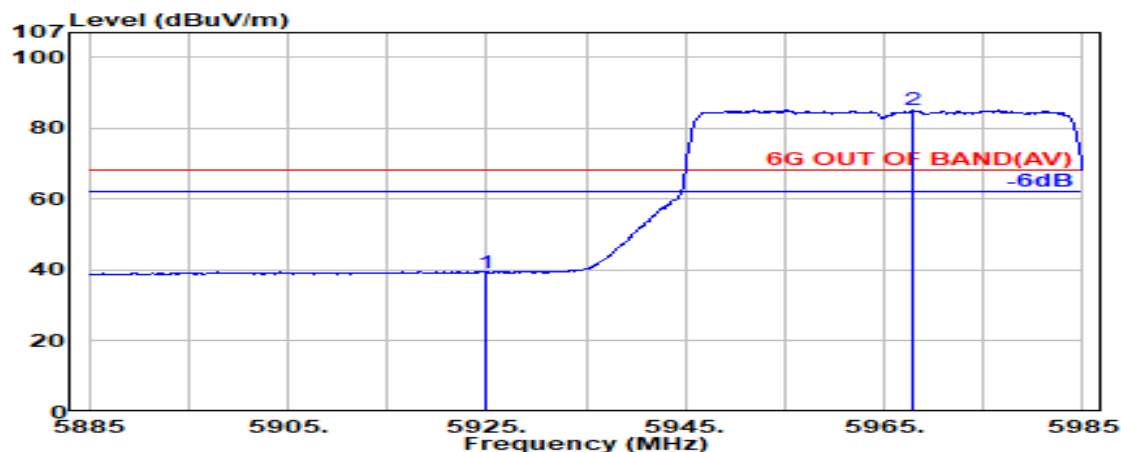

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.44             | 39.27                   | 68.20           | 28.93       | Average  |
| @ 5967.800               | 34.26                 | 9.01            | 34.39                  | 76.33             | 85.22                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

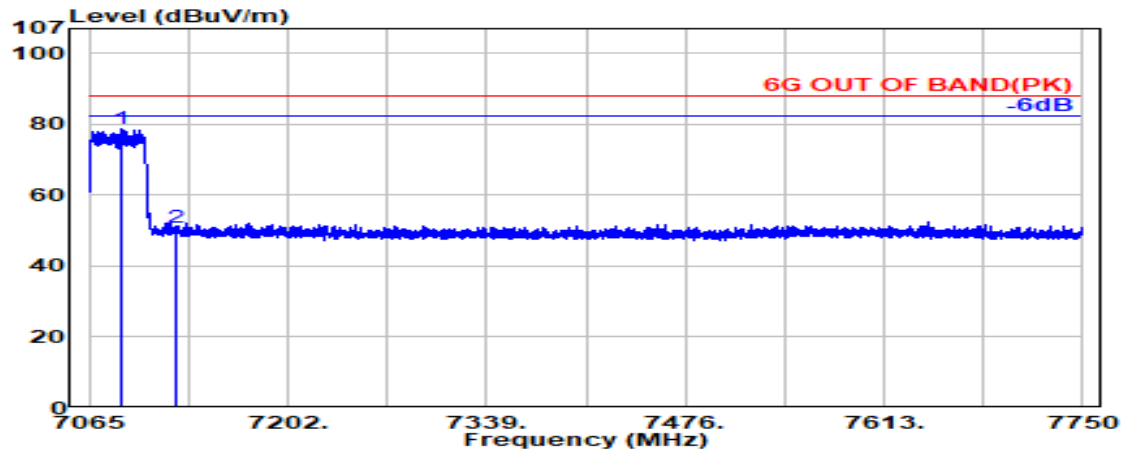

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7087.200               | 35.75                 | 9.78            | 34.46            | 67.58             | 78.64                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.82             | 51.03                   | 88.20           | 37.17       | Peak     |

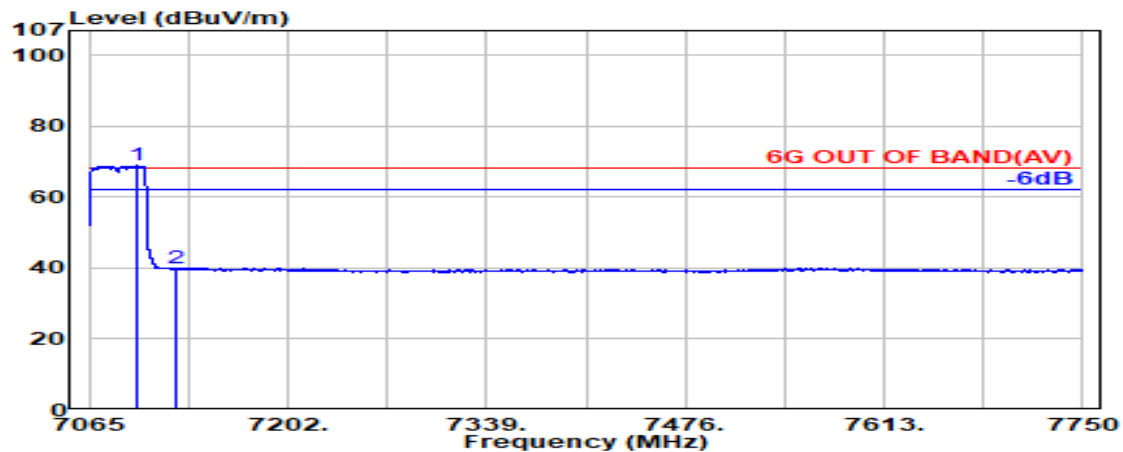

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7097.500               | 35.79                 | 9.78            | 34.47            | 57.81             | 68.91                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.57             | 39.78                   | 68.20           | 28.42       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

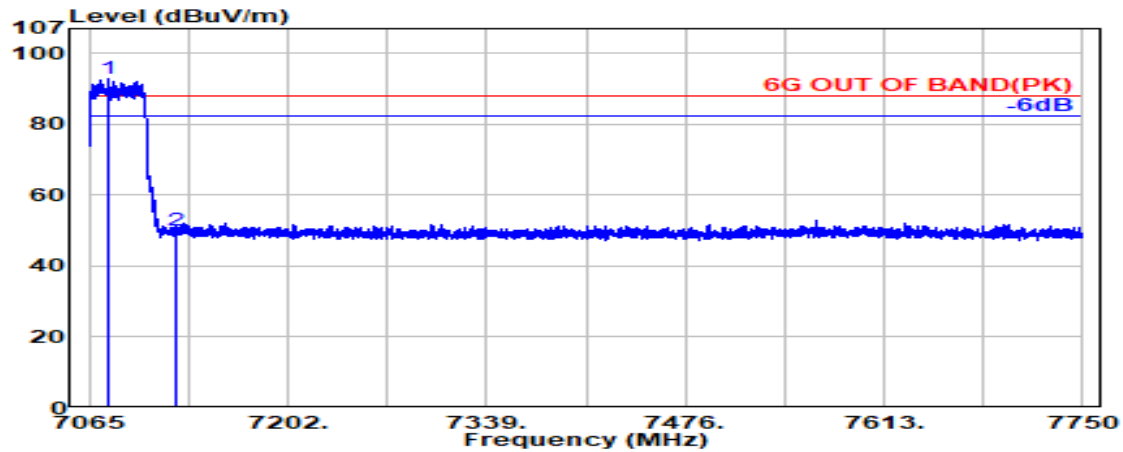

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7078.900               | 35.72                 | 9.77            | 34.46            | 81.79             | 92.82                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.68             | 49.89                   | 88.20           | 38.31       | Peak     |

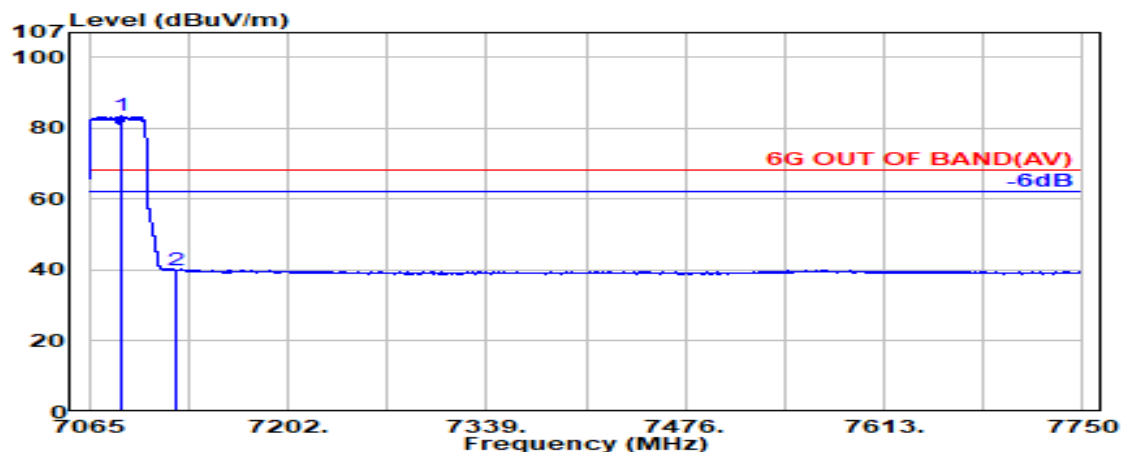

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7087.500               | 35.75                 | 9.78            | 34.46            | 72.34             | 83.40                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.73             | 39.94                   | 68.20           | 28.26       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

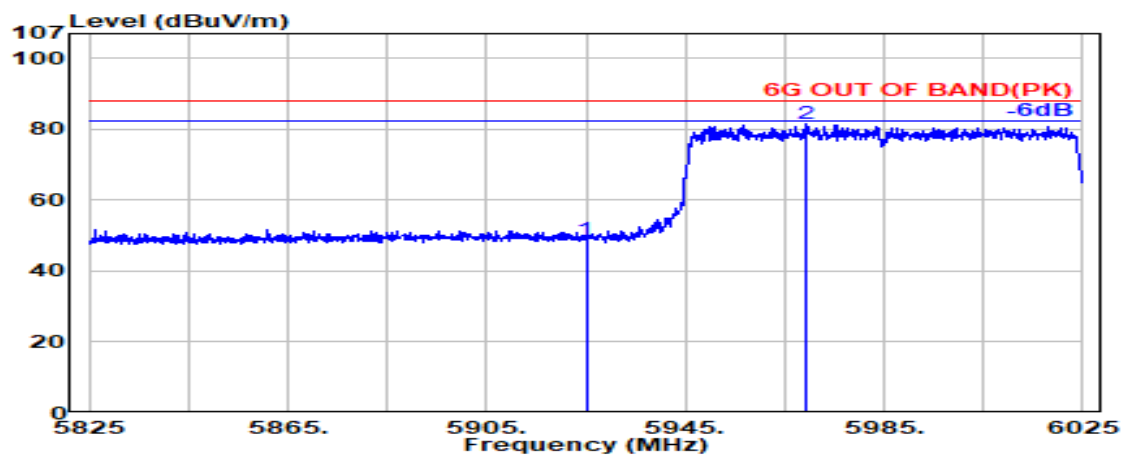

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.06             | 48.88                   | 88.20           | 39.32       | Peak     |
| @ 5969.500               | 34.26                 | 9.01            | 34.39            | 72.56             | 81.44                   | ---             | ---         | Peak     |

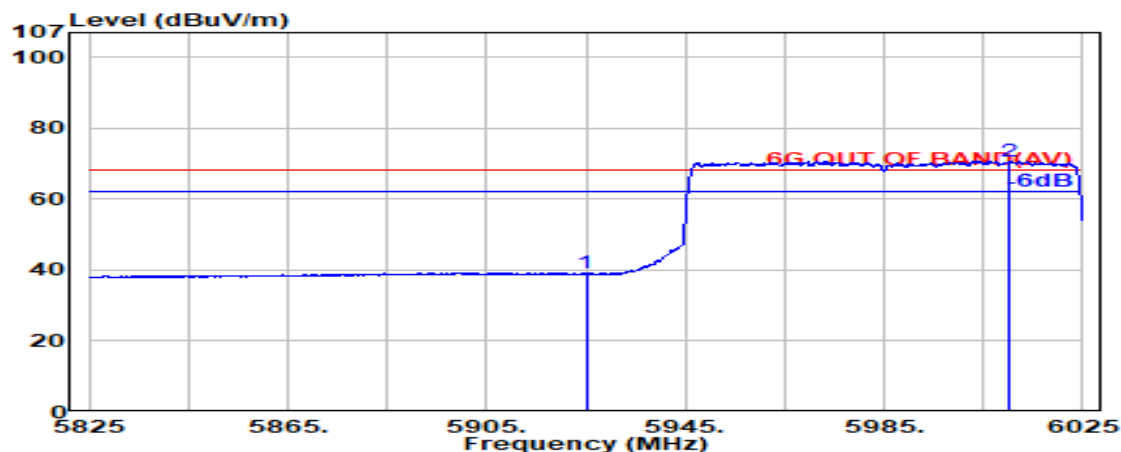

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.22             | 39.05                   | 68.20           | 29.15       | Average  |
| @ 6010.100               | 34.20                 | 9.04            | 34.39            | 61.86             | 70.70                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

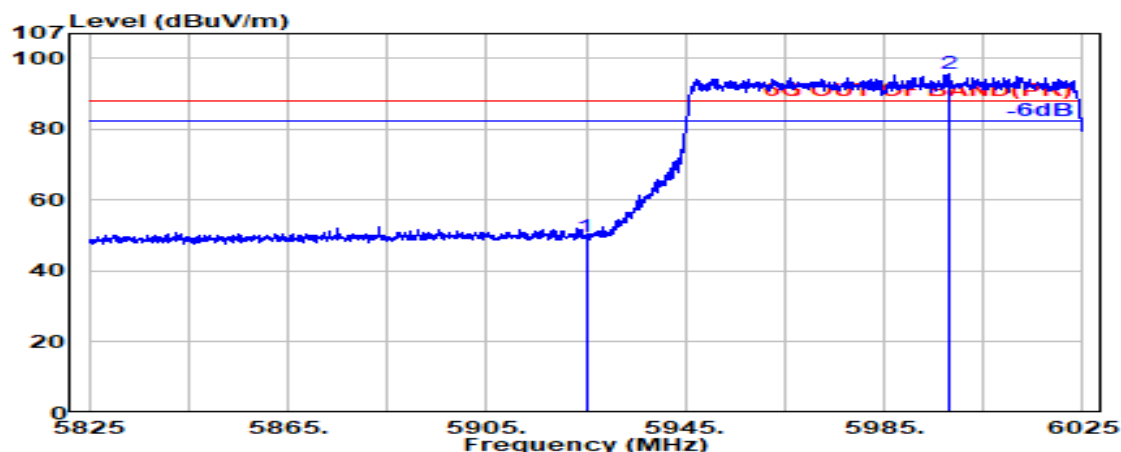

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.71             | 49.53                   | 88.20           | 38.67       | Peak     |
| @ 5998.200               | 34.20                 | 9.03            | 34.40            | 86.86             | 95.69                   | ---             | ---         | Peak     |

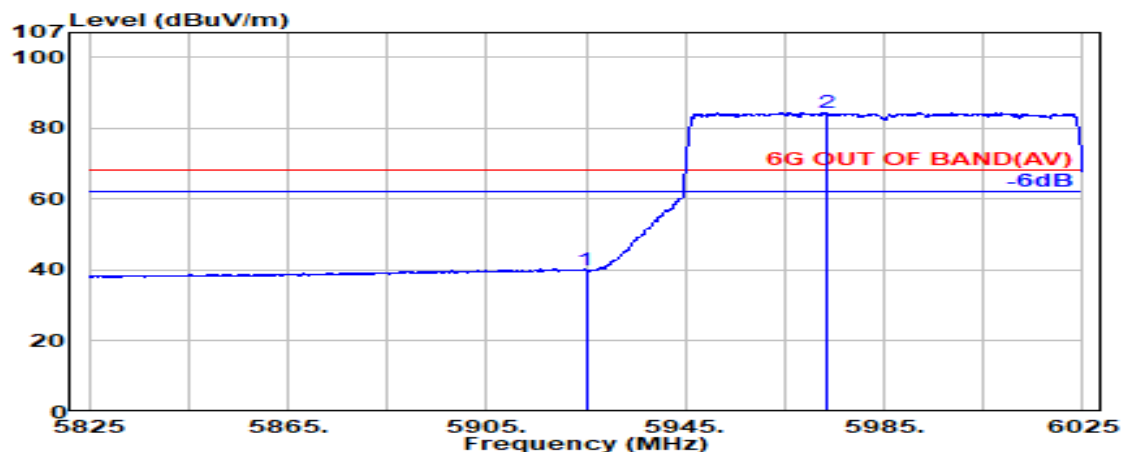

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.98             | 39.81                   | 68.20           | 28.39       | Average  |
| @ 5973.400               | 34.25                 | 9.02            | 34.39            | 75.55             | 84.43                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

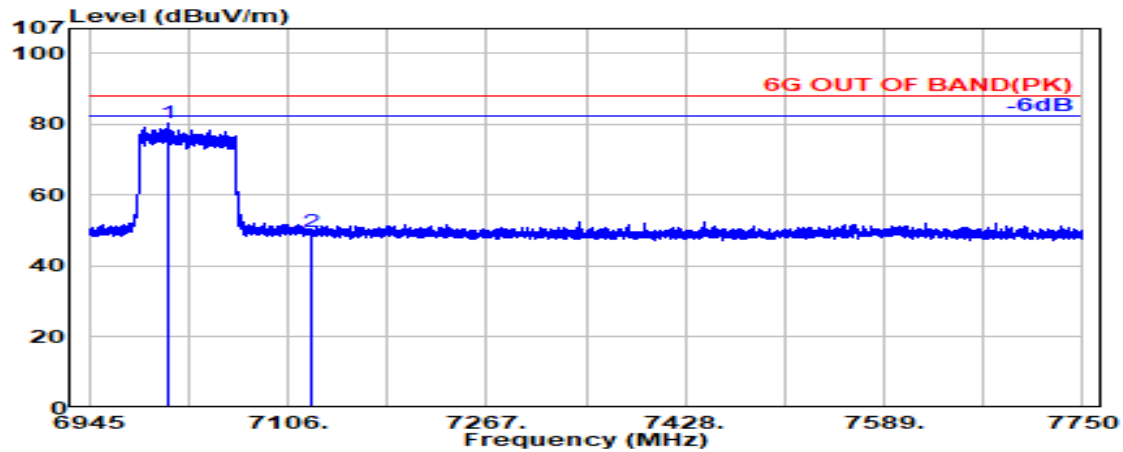

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.700               | 35.52                 | 9.73            | 34.41            | 69.51             | 80.35                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.36             | 49.57                   | 88.20           | 38.63       | Peak     |

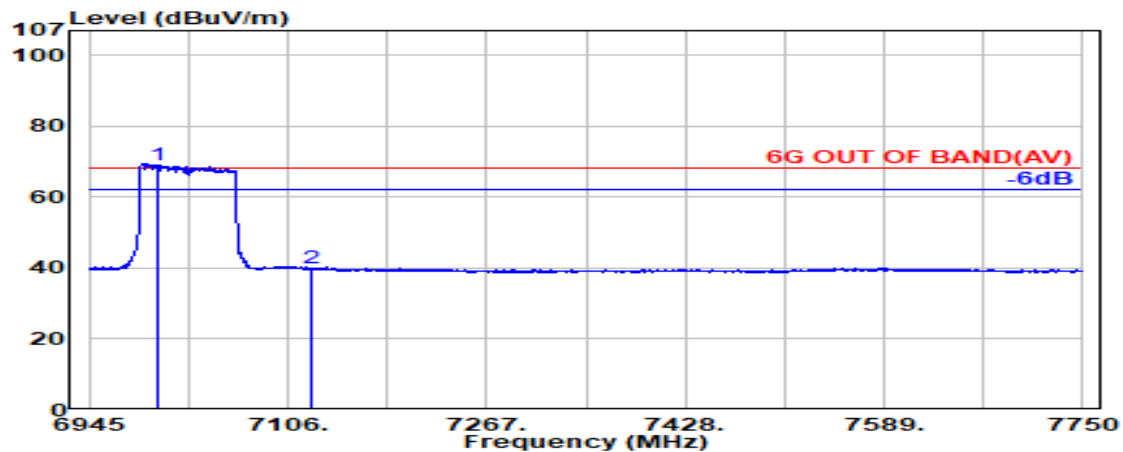

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7000.300               | 35.50                 | 9.72            | 34.40            | 58.21             | 69.03                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.61             | 39.82                   | 68.20           | 28.38       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

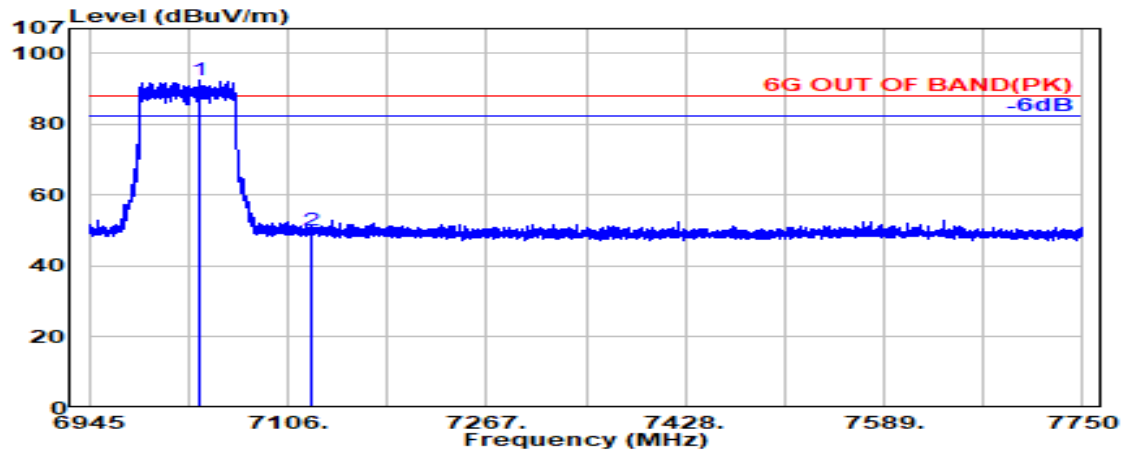

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7033.600               | 35.57                 | 9.74            | 34.42            | 81.39             | 92.28                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.85             | 50.06                   | 88.20           | 38.14       | Peak     |

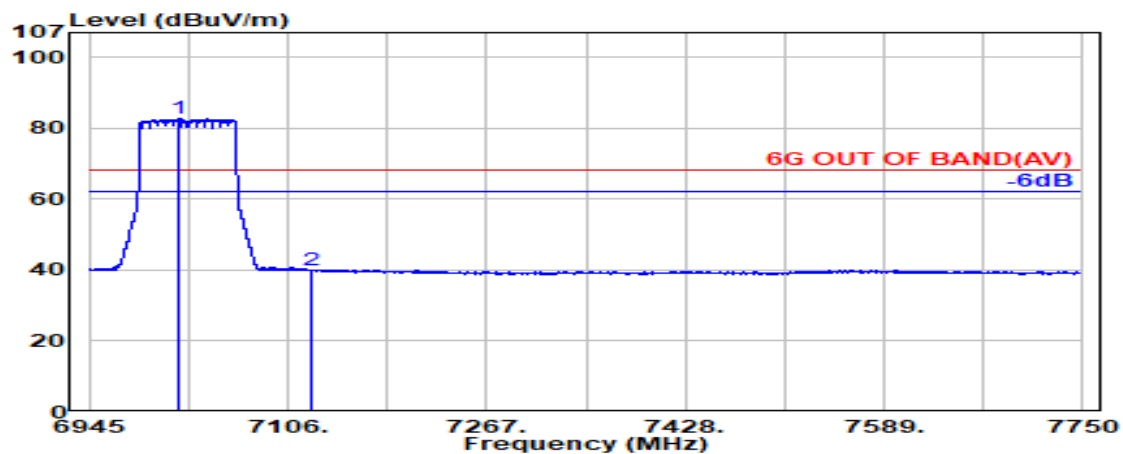

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7017.900               | 35.54                 | 9.73            | 34.41            | 72.08             | 82.94                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.82             | 40.04                   | 68.20           | 28.16       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

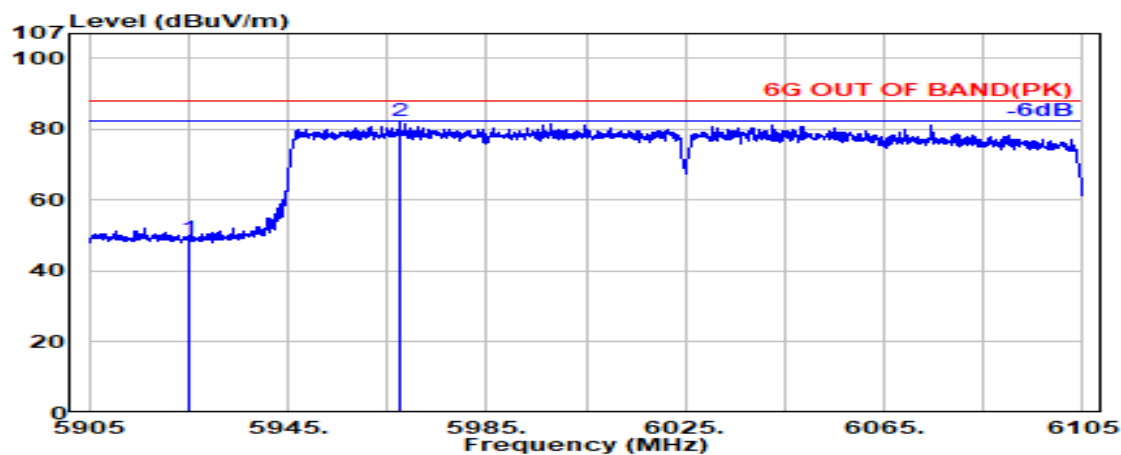

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.48             | 49.30                   | 88.20           | 38.90       | Peak     |
| @ 5967.600               | 34.26                 | 9.01            | 34.39                  | 73.47             | 82.36                   | ---             | ---         | Peak     |

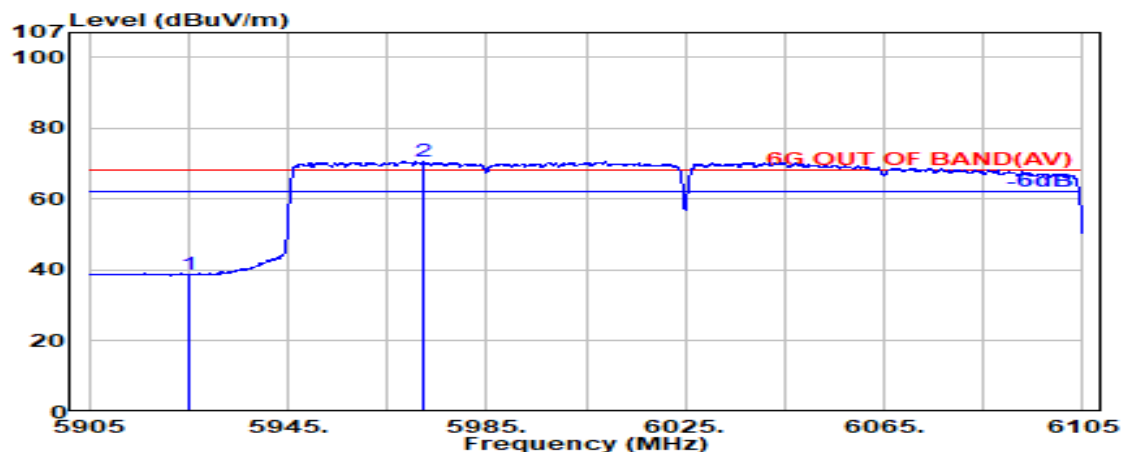

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 29.86             | 38.69                   | 68.20           | 29.51       | Average  |
| @ 5972.100               | 34.26                 | 9.02            | 34.39                  | 61.73             | 70.62                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

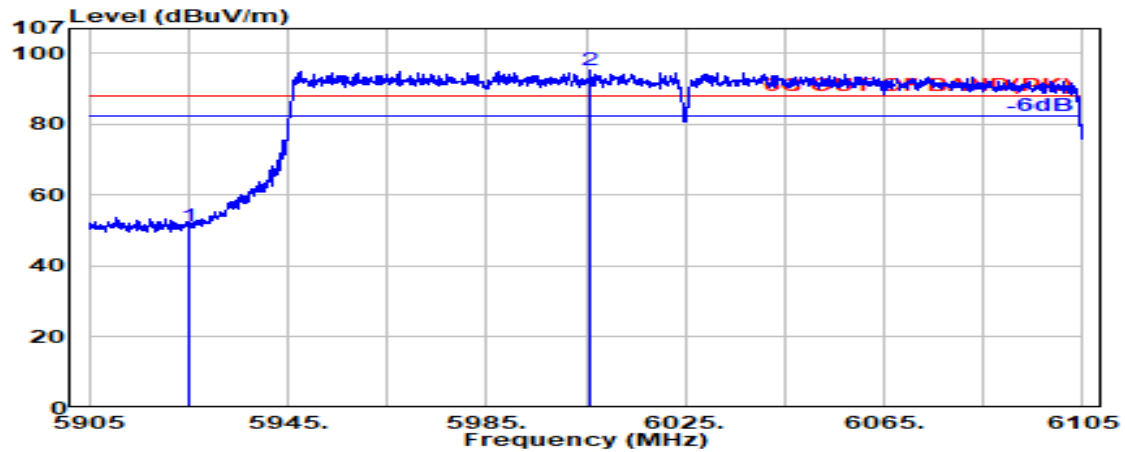

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 42.55             | 51.38                   | 88.20           | 36.82       | Peak     |
| @ 6005.800               | 34.20                 | 9.03            | 34.40            | 86.48             | 95.32                   | ---             | ---         | Peak     |

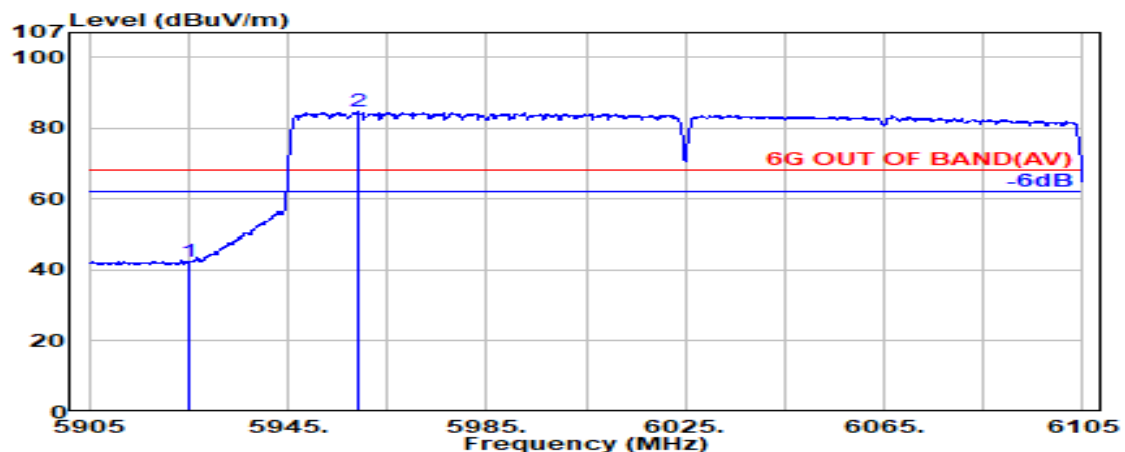

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 33.43             | 42.25                   | 68.20           | 25.95       | Average  |
| @ 5959.100               | 34.28                 | 9.01            | 34.38            | 75.69             | 84.60                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

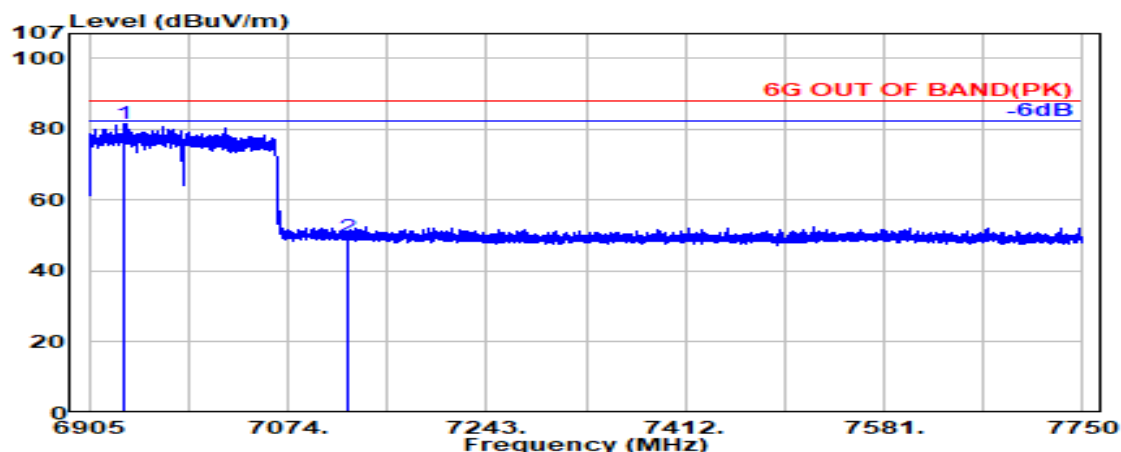

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6935.600               | 35.47                 | 9.68            | 34.36            | 70.67             | 81.46                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.47             | 49.68                   | 88.20           | 38.52       | Peak     |

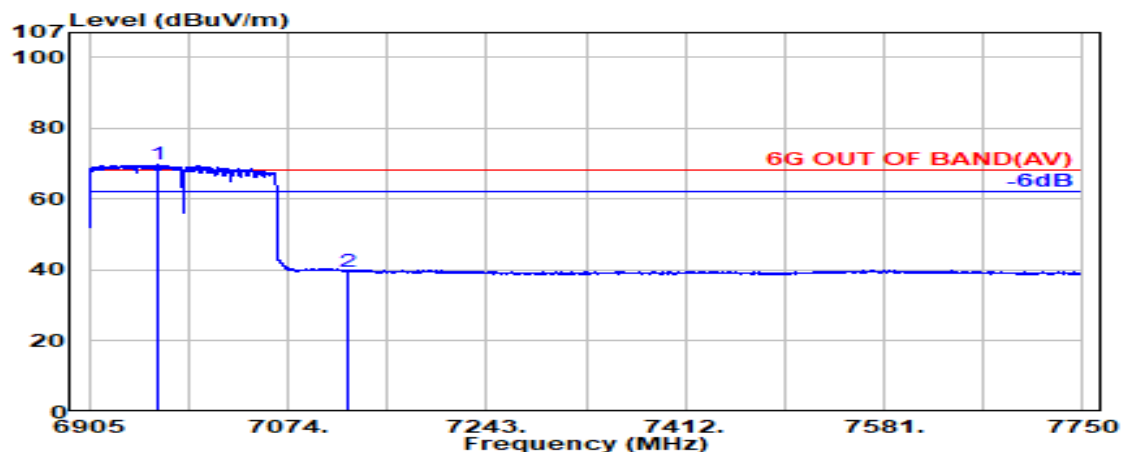

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6963.000               | 35.50                 | 9.70            | 34.38            | 58.90             | 69.72                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.51             | 39.72                   | 68.20           | 28.48       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

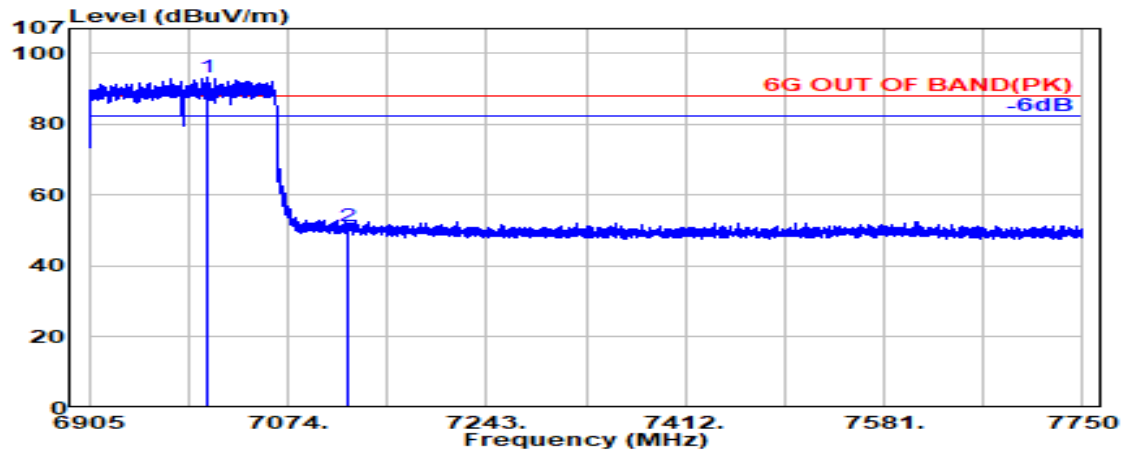

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7004.700               | 35.51                 | 9.72            | 34.40                  | 82.44             | 93.27                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 40.25             | 51.46                   | 88.20           | 36.74       | Peak     |

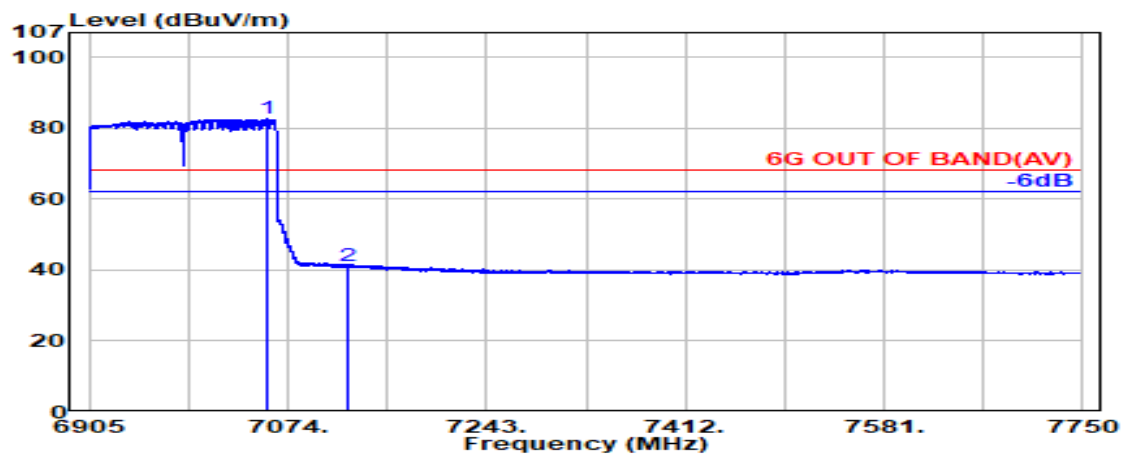

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7055.600               | 35.62                 | 9.76            | 34.44                  | 71.65             | 82.59                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.16             | 41.37                   | 68.20           | 26.83       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 5          |
|      |                | Frequency  | TX 5955MHz |

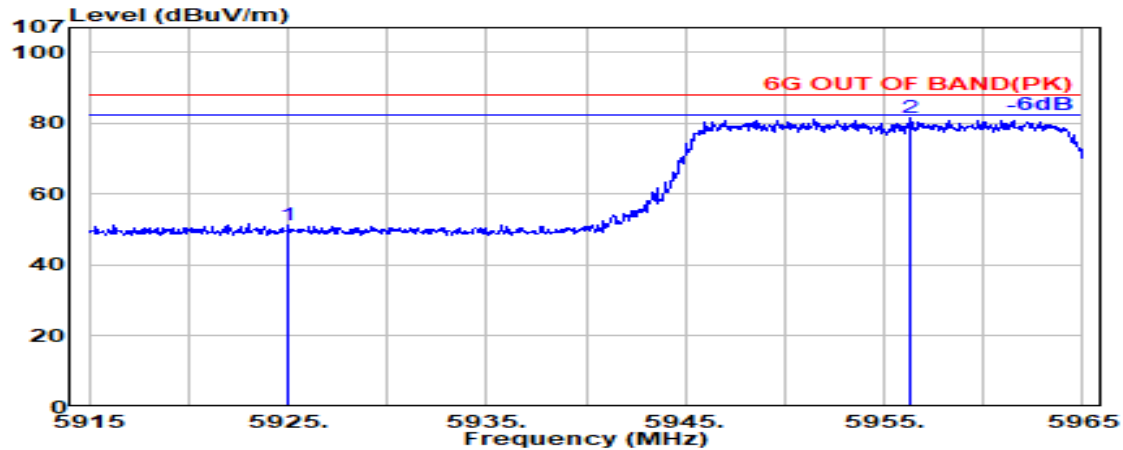

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 42.48             | 51.31                   | 88.20           | 36.89       | Peak     |
| @ 5956.350               | 34.29                 | 9.01            | 34.38            | 72.85             | 81.76                   | ---             | ---         | Peak     |

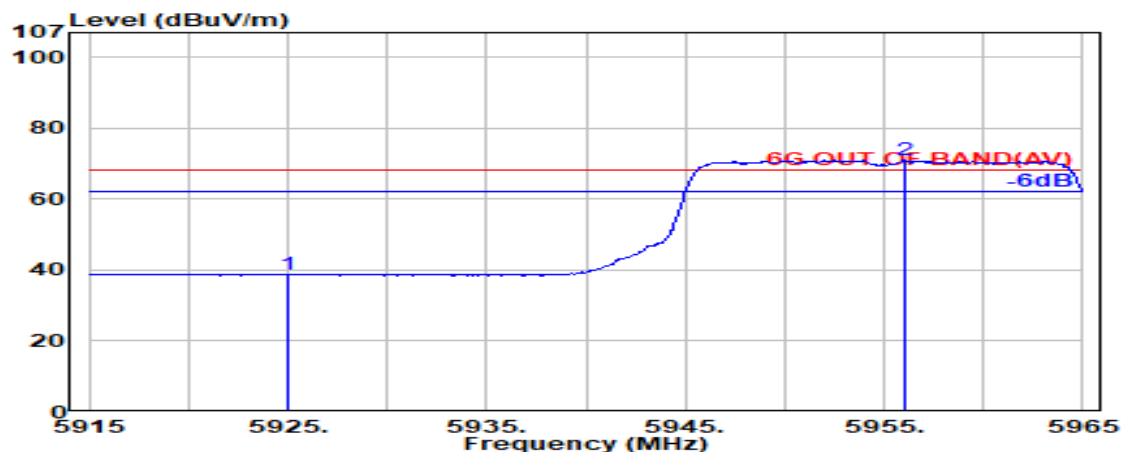

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.89             | 38.72                   | 68.20           | 29.48       | Average  |
| @ 5956.000               | 34.29                 | 9.01            | 34.38            | 62.10             | 71.02                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 5          |
|      |                | Frequency  | TX 5955MHz |

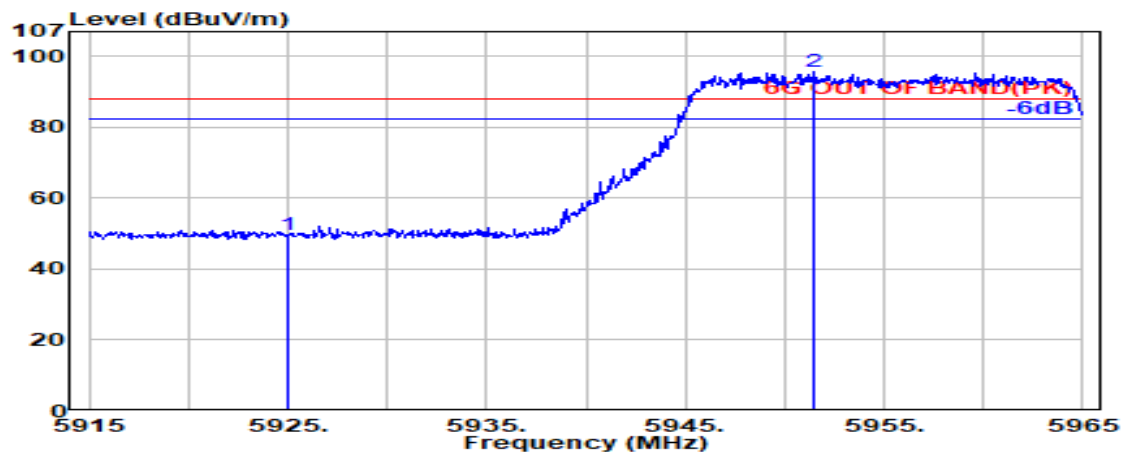

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.66             | 49.48                   | 88.20           | 38.72       | Peak     |
| @ 5951.500               | 34.30                 | 9.00            | 34.38            | 86.59             | 95.51                   | ---             | ---         | Peak     |

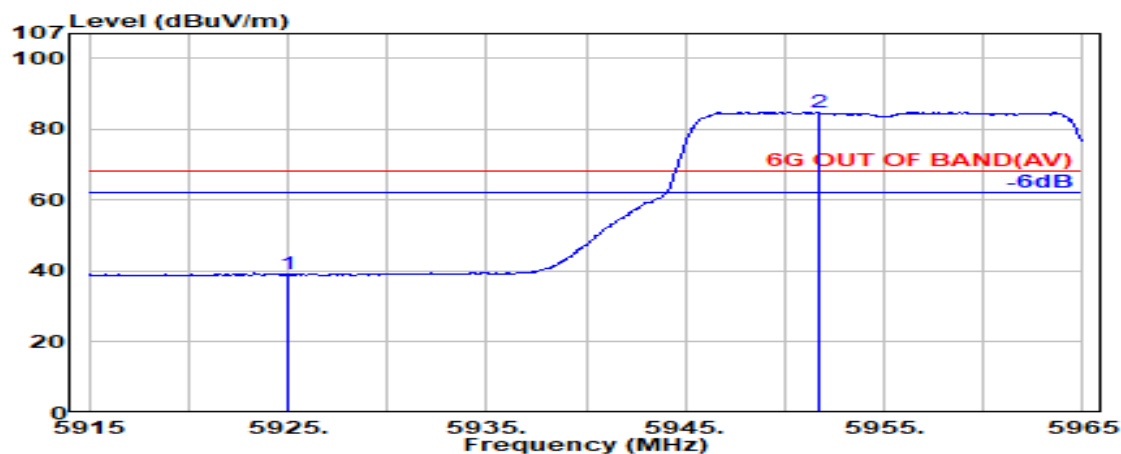

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.34             | 39.17                   | 68.20           | 29.03       | Average  |
| @ 5951.700               | 34.30                 | 9.00            | 34.38            | 75.97             | 84.89                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 8          |
|      |                | Frequency  | TX 7115MHz |

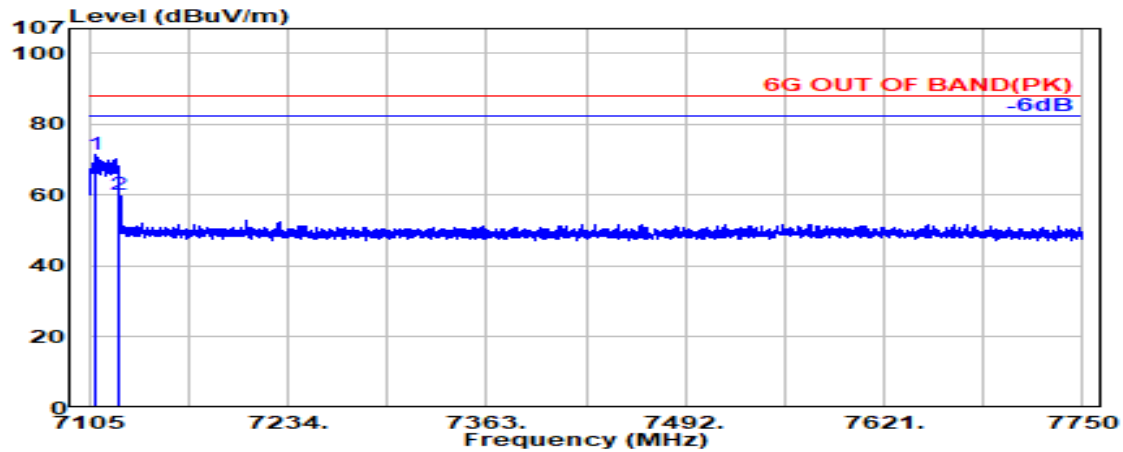

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7109.100               | 35.84                 | 9.79            | 34.48            | 60.33             | 71.47                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 48.82             | 60.03                   | 88.20           | 28.17       | Peak     |

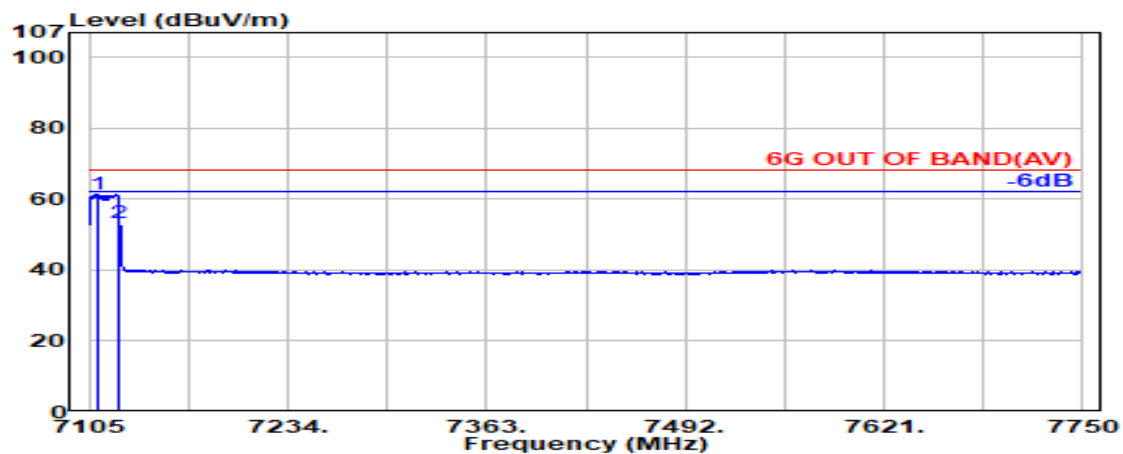

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7110.400               | 35.84                 | 9.79            | 34.48            | 50.20             | 61.36                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 42.11             | 53.32                   | 68.20           | 14.88       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 8          |
|      |                | Frequency  | TX 7115MHz |

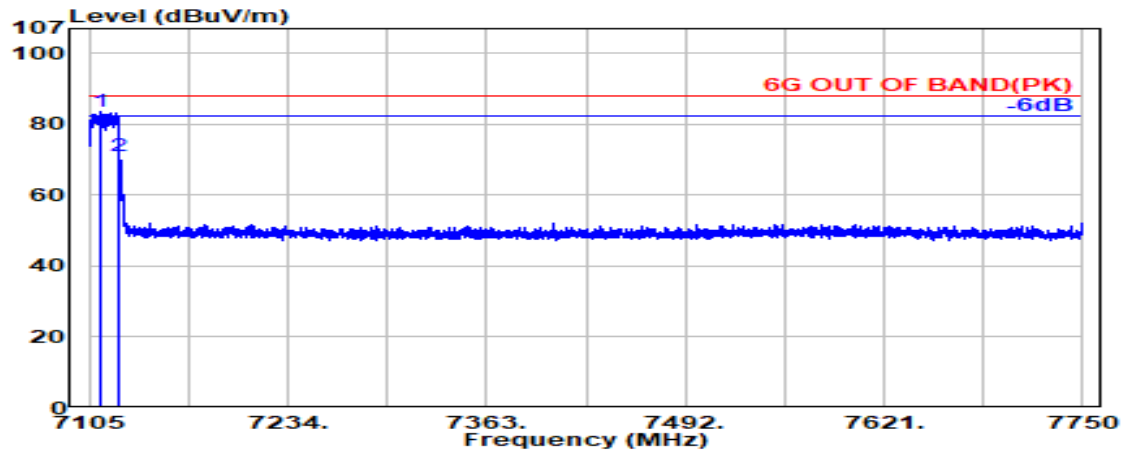

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7112.100               | 35.85                 | 9.79            | 34.48            | 72.47             | 83.63                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 60.05             | 71.26                   | 88.20           | 16.94       | Peak     |

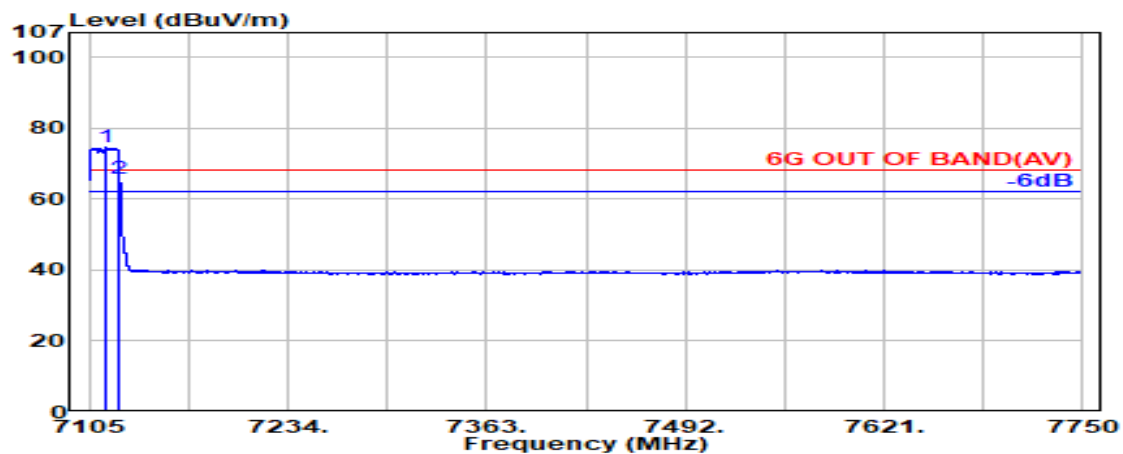

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7116.400               | 35.87                 | 9.80            | 34.48            | 63.48             | 74.66                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 54.44             | 65.65                   | 68.20           | 2.55        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 5          |
|      |                | Frequency  | TX 5965MHz |

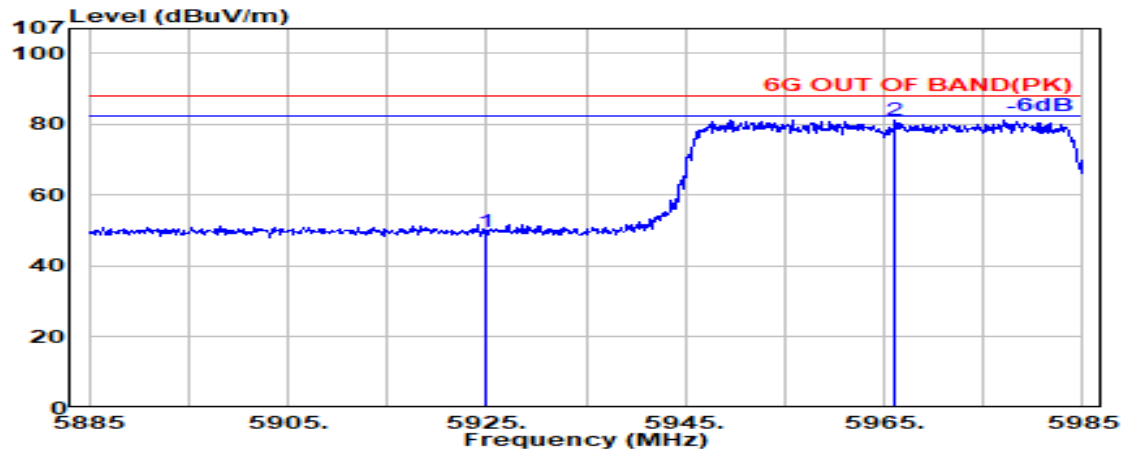

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.93             | 49.76                   | 88.20           | 38.44       | Peak     |
| @ 5966.100               | 34.27                 | 9.01            | 34.39            | 72.33             | 81.23                   | ---             | ---         | Peak     |

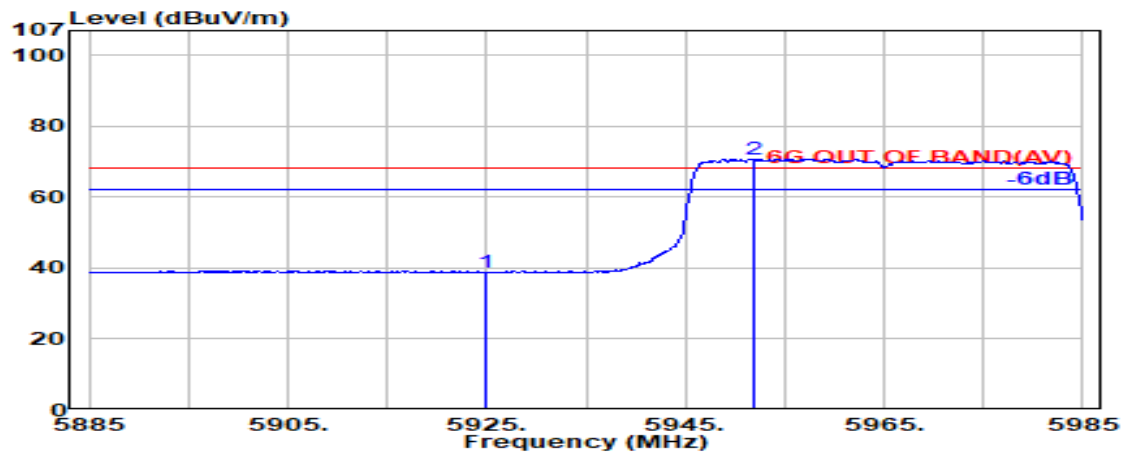

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.00             | 38.82                   | 68.20           | 29.38       | Average  |
| @ 5951.800               | 34.30                 | 9.00            | 34.38            | 61.83             | 70.75                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 5          |
|      |                | Frequency  | TX 5965MHz |

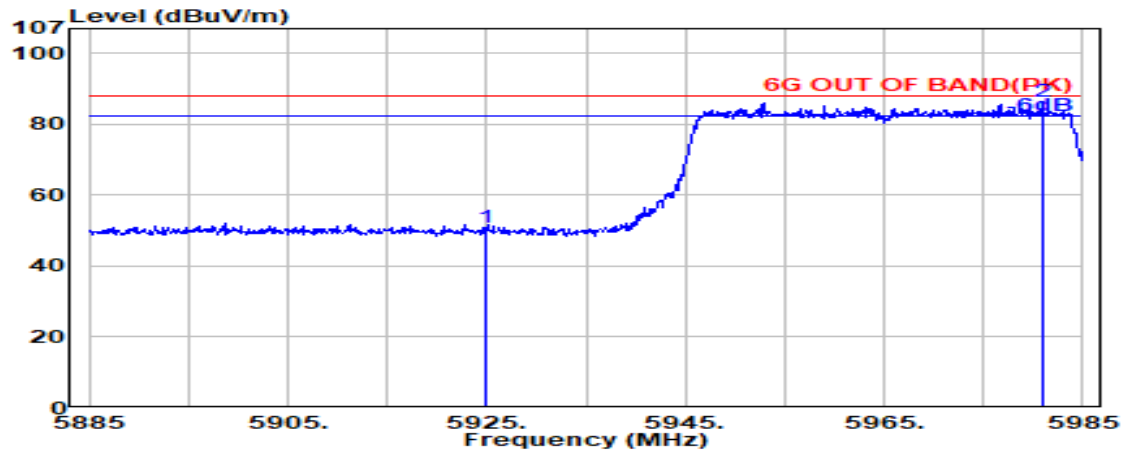

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.99             | 50.82                   | 88.20           | 37.38       | Peak     |
| @ 5981.000               | 34.24                 | 9.02            | 34.39            | 77.55             | 86.41                   | ---             | ---         | Peak     |

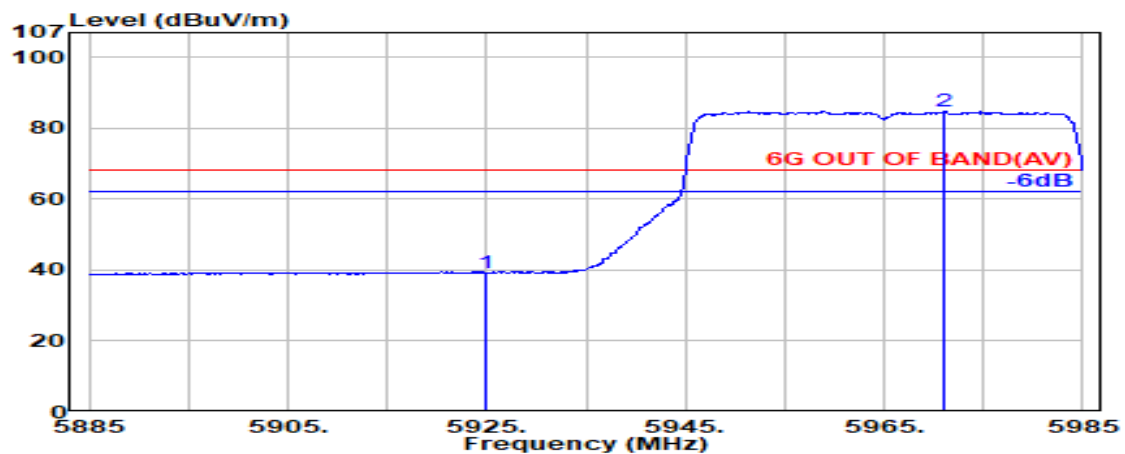

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.38             | 39.20                   | 68.20           | 29.00       | Average  |
| @ 5971.100               | 34.26                 | 9.01            | 34.39            | 75.93             | 84.81                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 8          |
|      |                | Frequency  | TX 7085MHz |

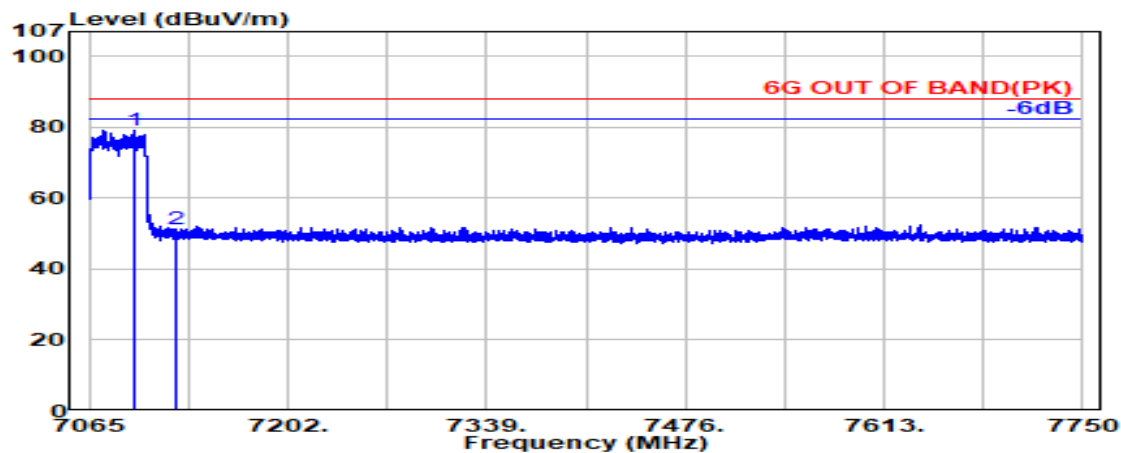

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7096.600               | 35.79                 | 9.78            | 34.47            | 68.12             | 79.22                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 40.25             | 51.46                   | 88.20           | 36.74       | Peak     |

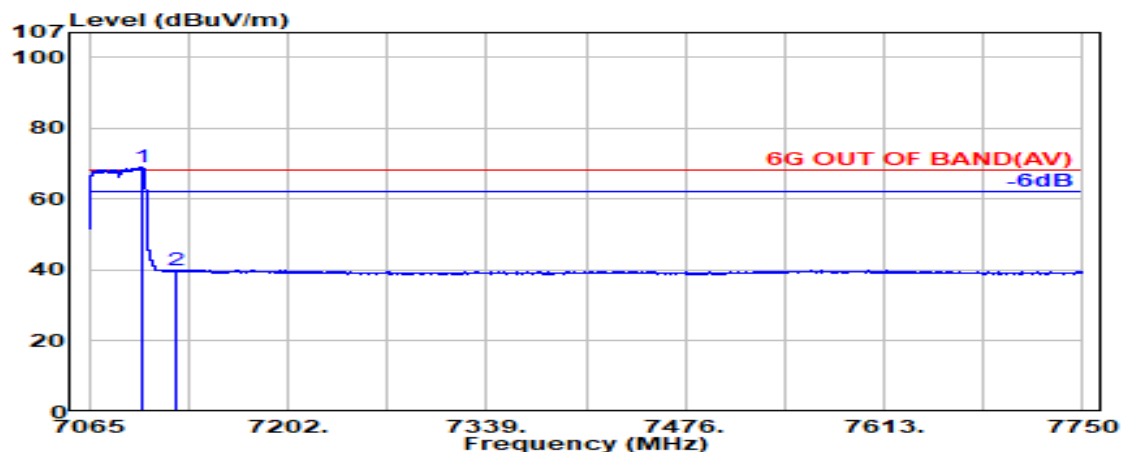

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.500               | 35.81                 | 9.79            | 34.47            | 58.04             | 69.16                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.56             | 39.77                   | 68.20           | 28.43       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 8          |
|      |                | Frequency  | TX 7085MHz |

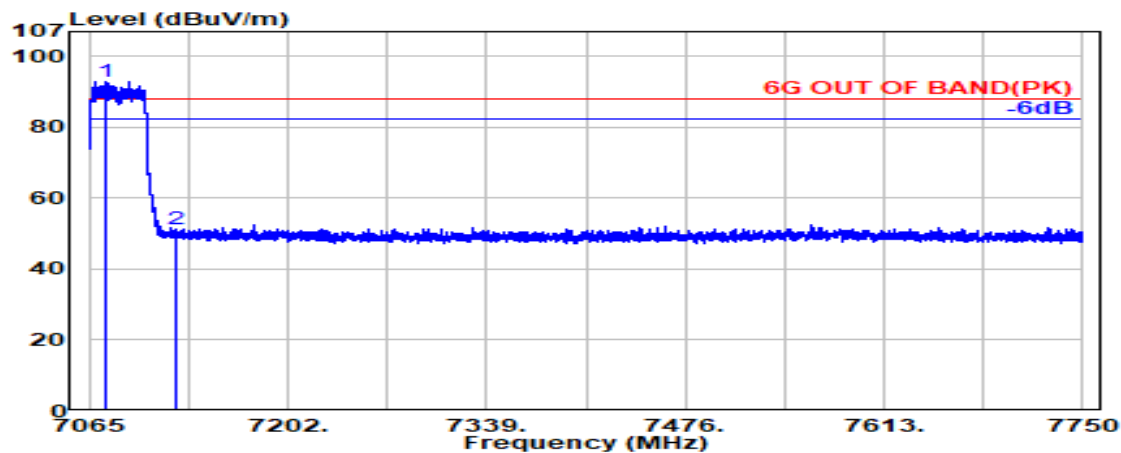

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7077.300               | 35.71                 | 9.77            | 34.46                  | 82.01             | 93.04                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 40.04             | 51.25                   | 88.20           | 36.95       | Peak     |

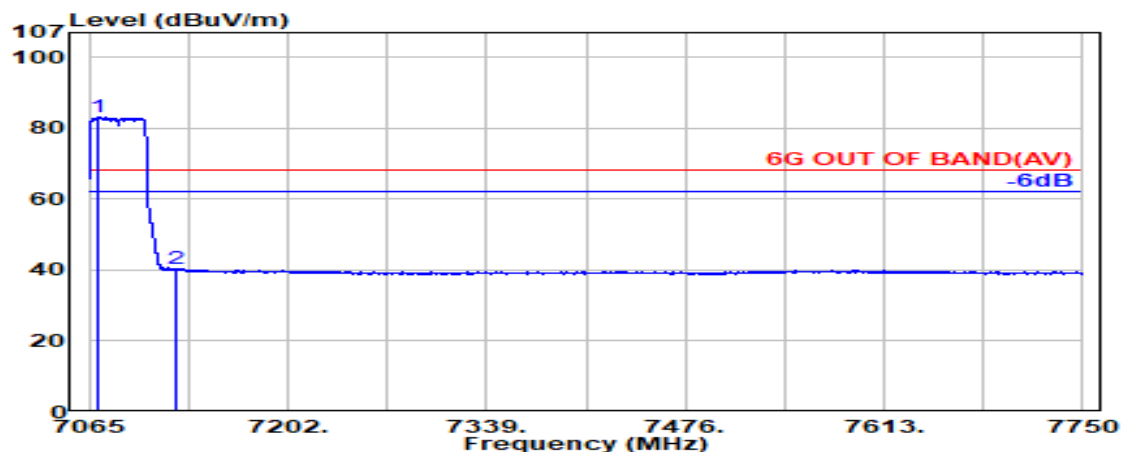

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7071.100               | 35.68                 | 9.77            | 34.45                  | 72.03             | 83.03                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 29.04             | 40.25                   | 68.20           | 27.95       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 5          |
|      |                | Frequency  | TX 5985MHz |

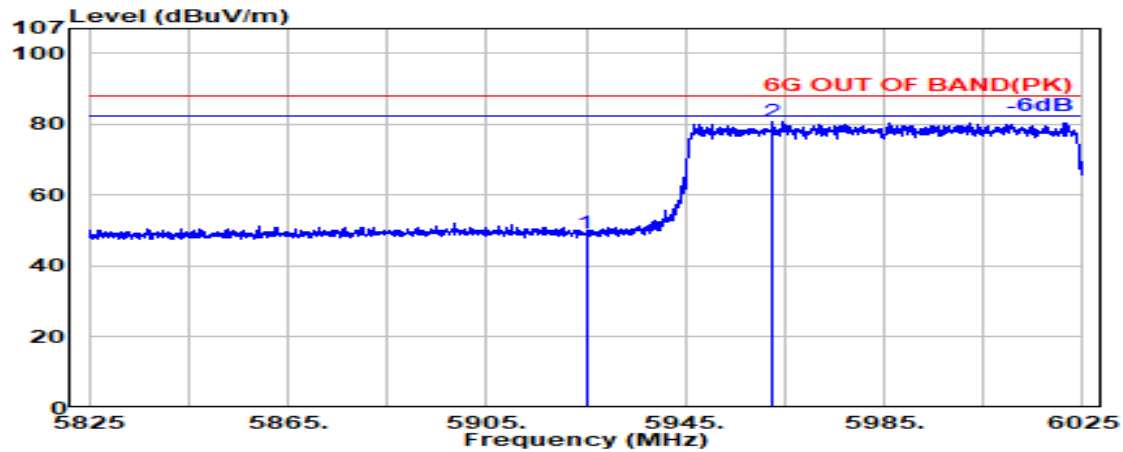

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.32             | 49.14                   | 88.20           | 39.06       | Peak     |
| @ 5962.300               | 34.28                 | 9.01            | 34.38            | 71.95             | 80.86                   | ---             | ---         | Peak     |

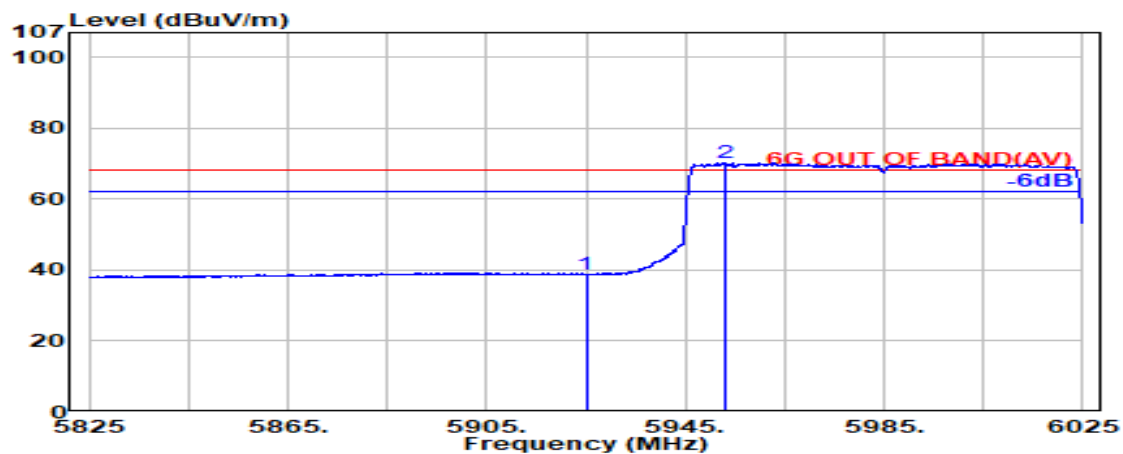

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.08             | 38.91                   | 68.20           | 29.29       | Average  |
| @ 5952.800               | 34.29                 | 9.00            | 34.38            | 61.31             | 70.23                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 5          |
|      |                | Frequency  | TX 5985MHz |

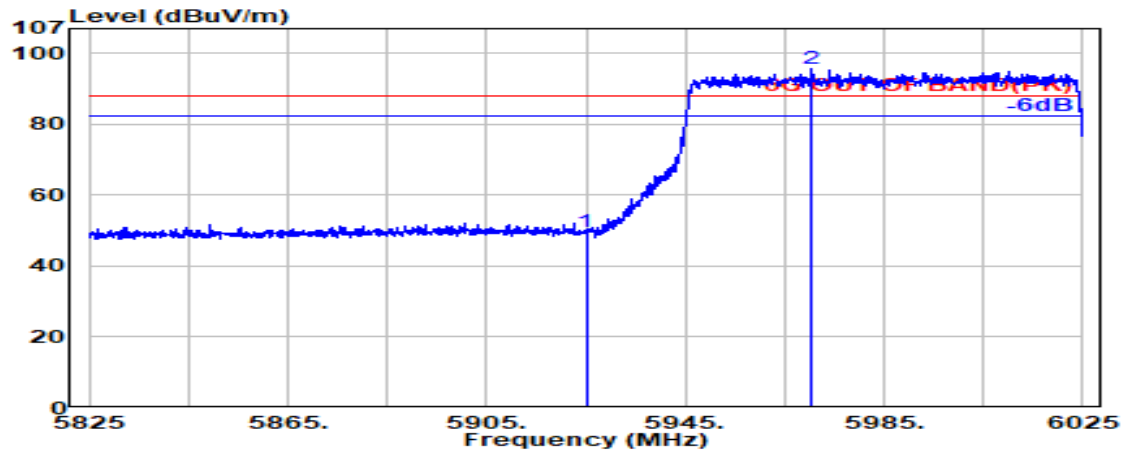

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.76             | 49.59                   | 88.20           | 38.61       | Peak     |
| @ 5970.200               | 34.26                 | 9.01            | 34.39                  | 86.75             | 95.64                   | ---             | ---         | Peak     |

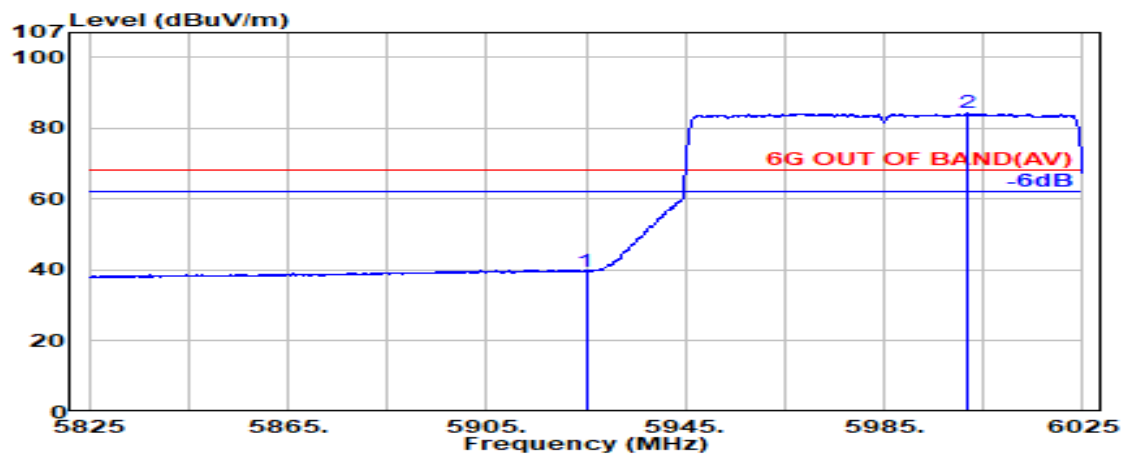

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.89             | 39.72                   | 68.20           | 28.48       | Average  |
| @ 6001.900               | 34.20                 | 9.03            | 34.40                  | 75.39             | 84.23                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 8          |
|      |                | Frequency  | TX 7025MHz |

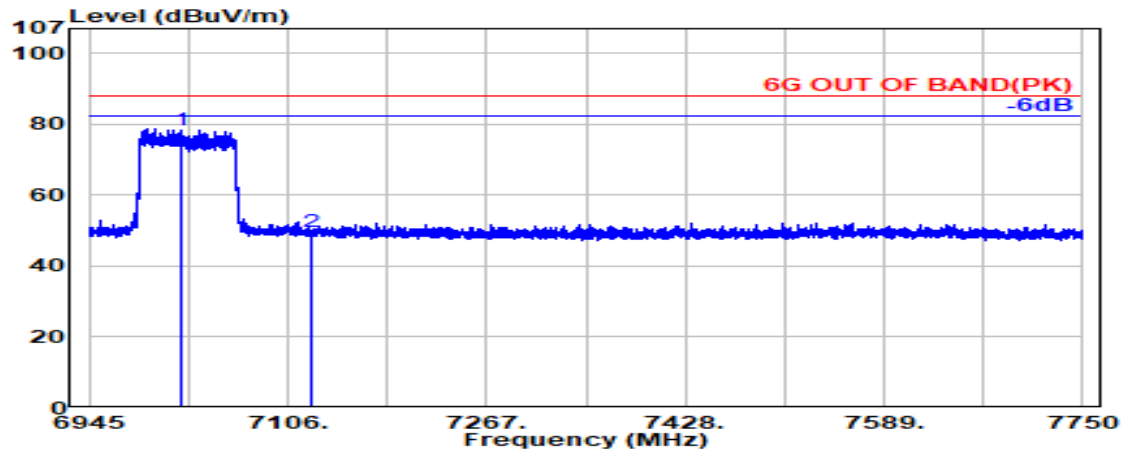

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7018.900               | 35.54                 | 9.73            | 34.41            | 67.47             | 78.33                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.34             | 49.56                   | 88.20           | 38.64       | Peak     |

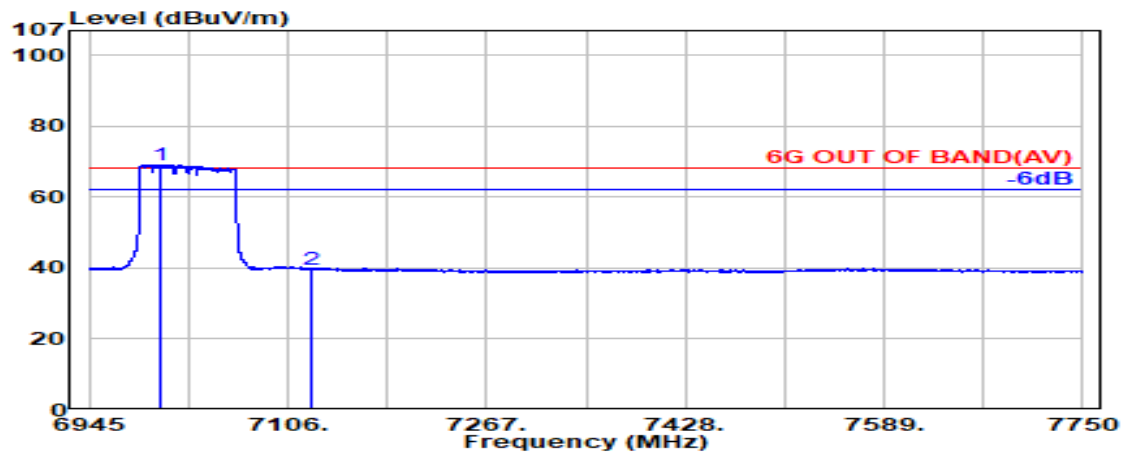

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7002.900               | 35.51                 | 9.72            | 34.40            | 58.37             | 69.20                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.50             | 39.71                   | 68.20           | 28.49       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 8          |
|      |                | Frequency  | TX 7025MHz |

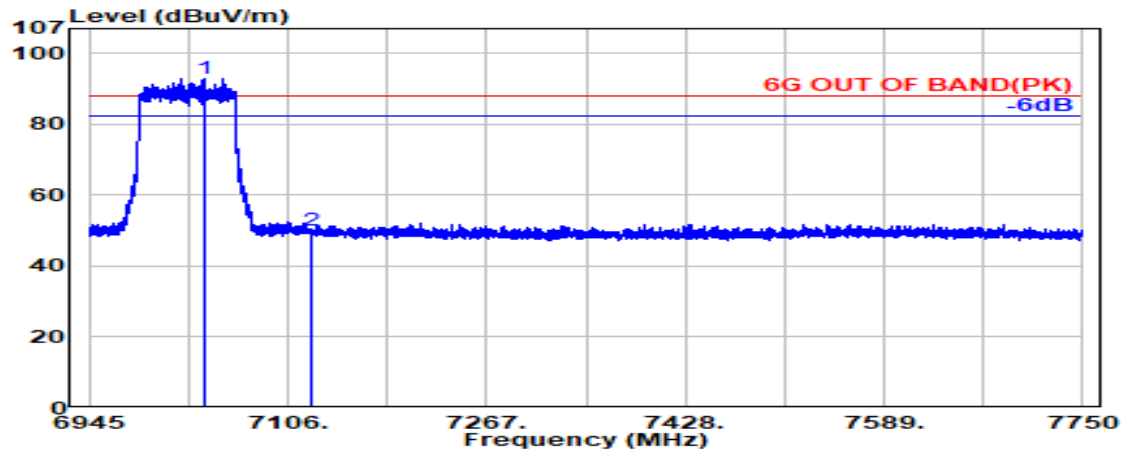

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7037.700               | 35.58                 | 9.74            | 34.43            | 82.13             | 93.03                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.89             | 50.11                   | 88.20           | 38.09       | Peak     |

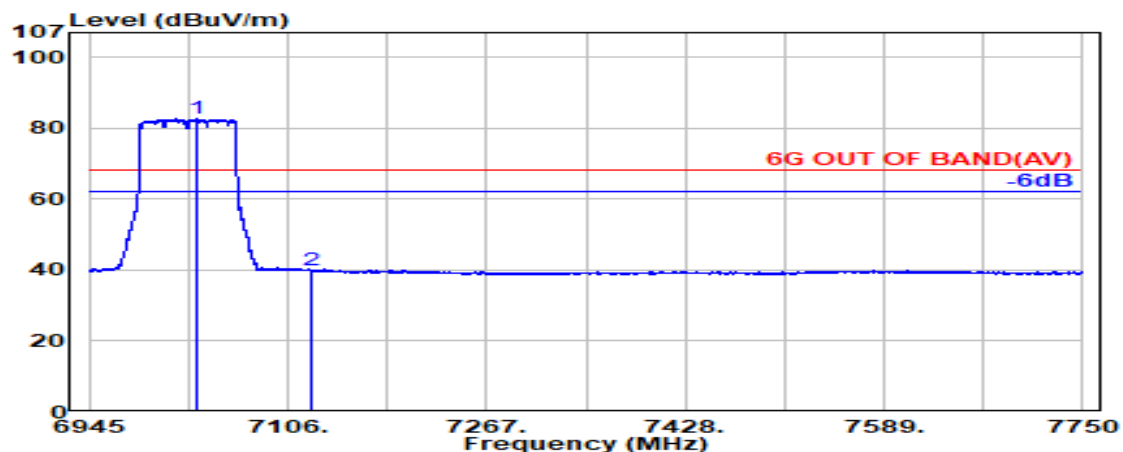

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7032.800               | 35.57                 | 9.74            | 34.42            | 71.77             | 82.65                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.68             | 39.89                   | 68.20           | 28.31       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6025MHz |

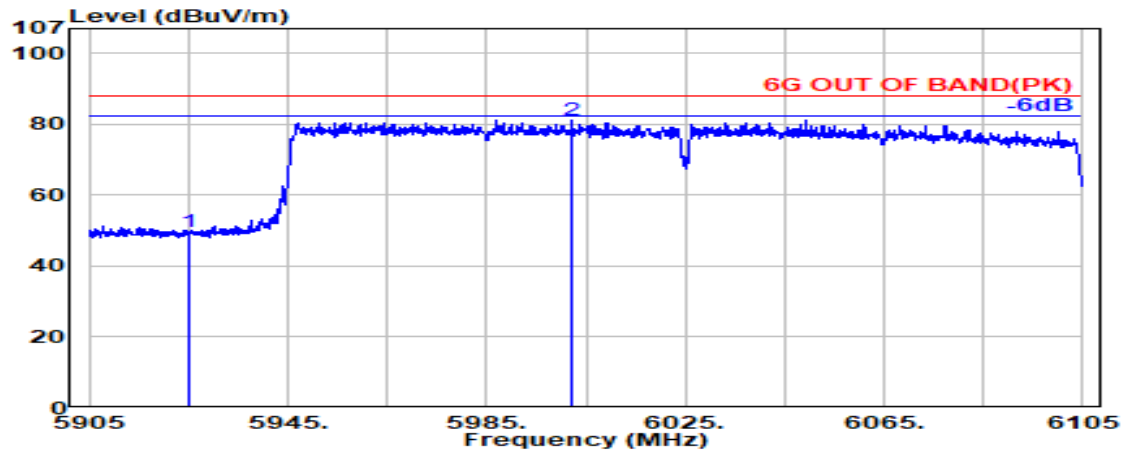

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.65             | 49.47                   | 88.20           | 38.73       | Peak     |
| @ 6002.100               | 34.20                 | 9.03            | 34.40                  | 72.43             | 81.27                   | ---             | ---         | Peak     |

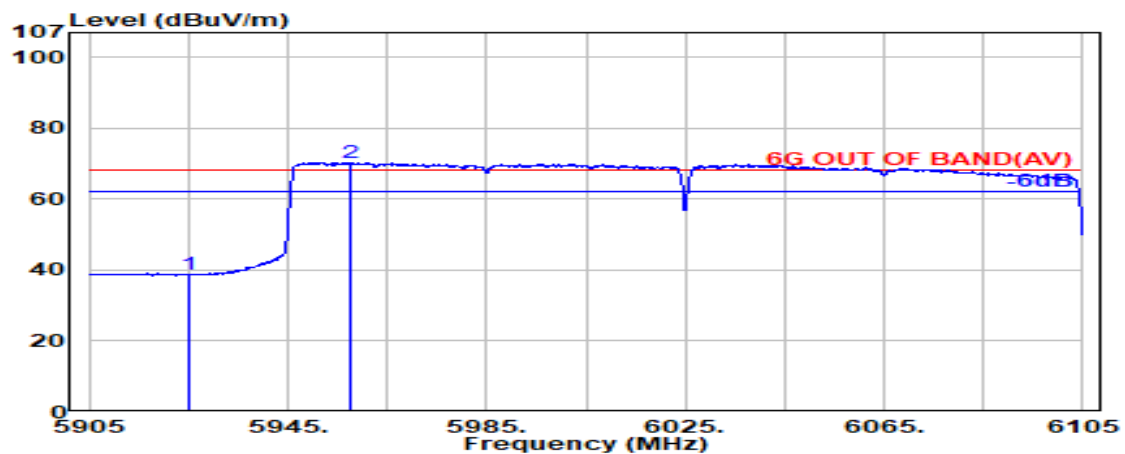

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 29.88             | 38.70                   | 68.20           | 29.50       | Average  |
| @ 5957.800               | 34.28                 | 9.01            | 34.38                  | 61.46             | 70.37                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6025MHz |

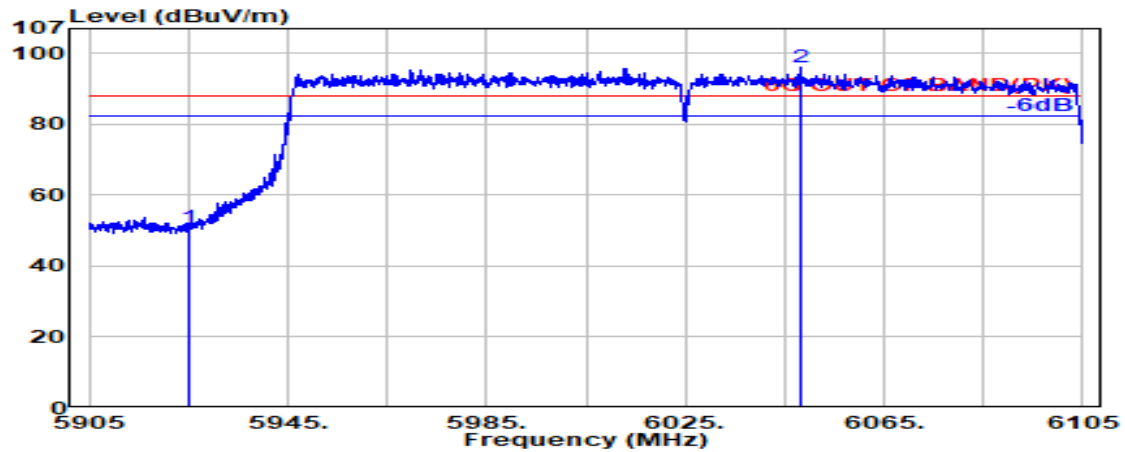

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.23             | 51.06                   | 88.20           | 37.14       | Peak     |
| @ 6048.000               | 34.20                 | 9.07            | 34.37                  | 87.05             | 95.95                   | ---             | ---         | Peak     |

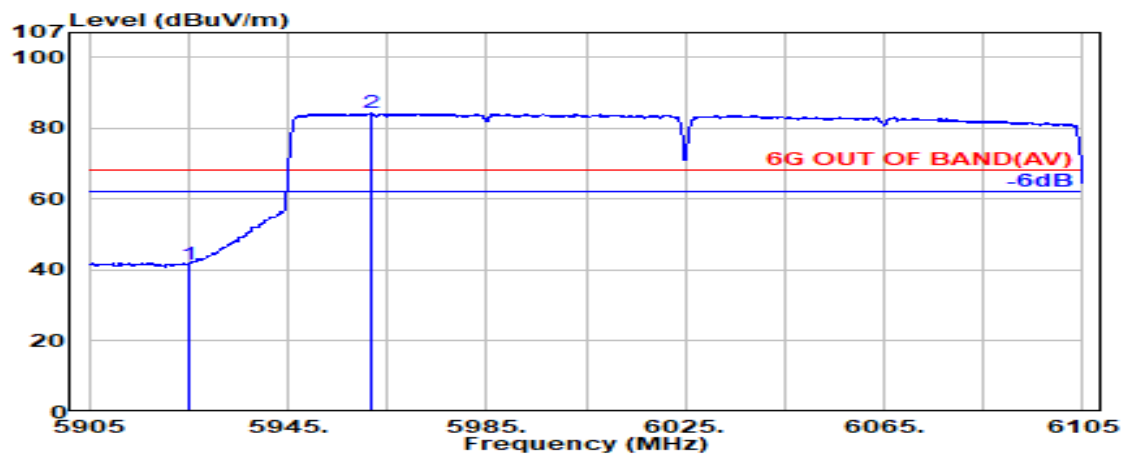

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 32.84             | 41.66                   | 68.20           | 26.54       | Average  |
| @ 5961.900               | 34.28                 | 9.01            | 34.38                  | 75.32             | 84.23                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6985MHz |

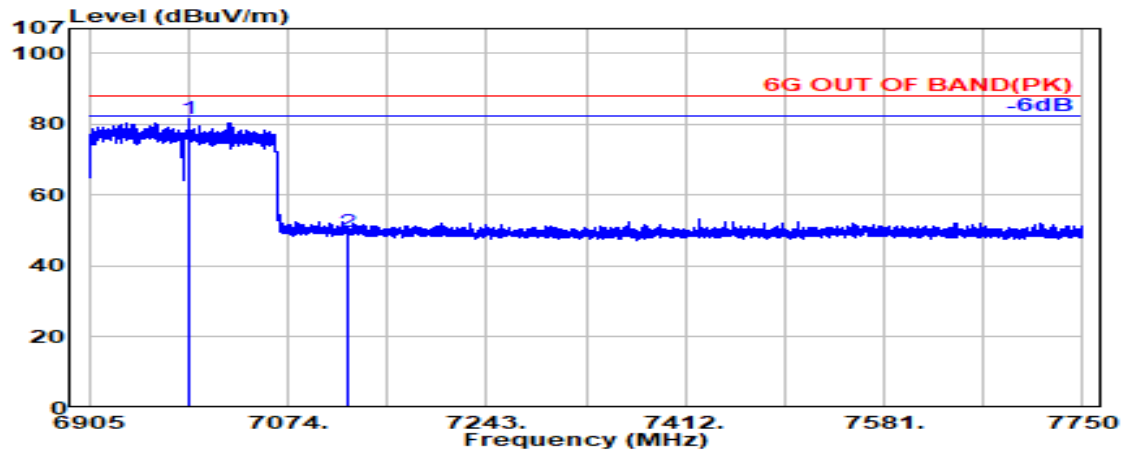

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6990.600               | 35.50                 | 9.71            | 34.39                  | 70.77             | 81.59                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.57             | 49.78                   | 88.20           | 38.42       | Peak     |

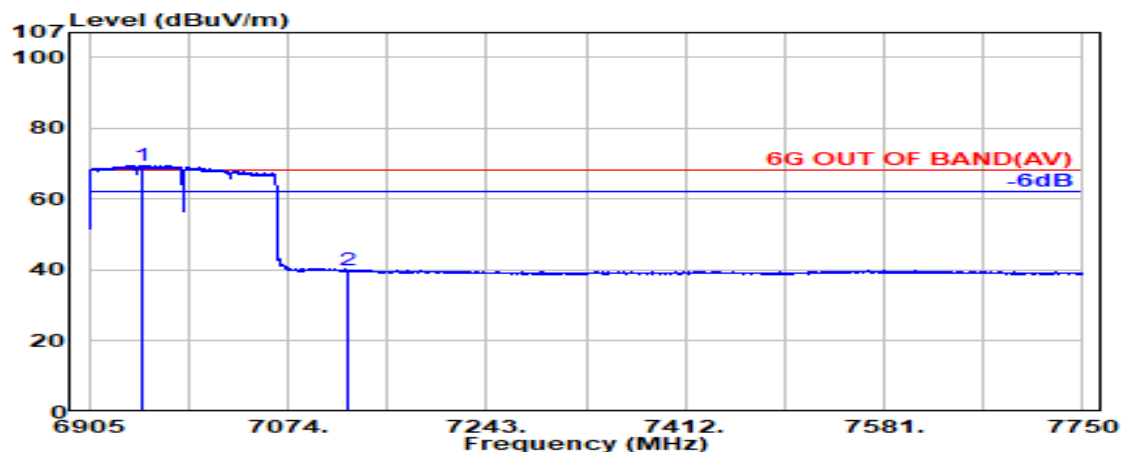

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6949.300               | 35.50                 | 9.69            | 34.37                  | 58.82             | 69.64                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.57             | 39.78                   | 68.20           | 28.42       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6985MHz |

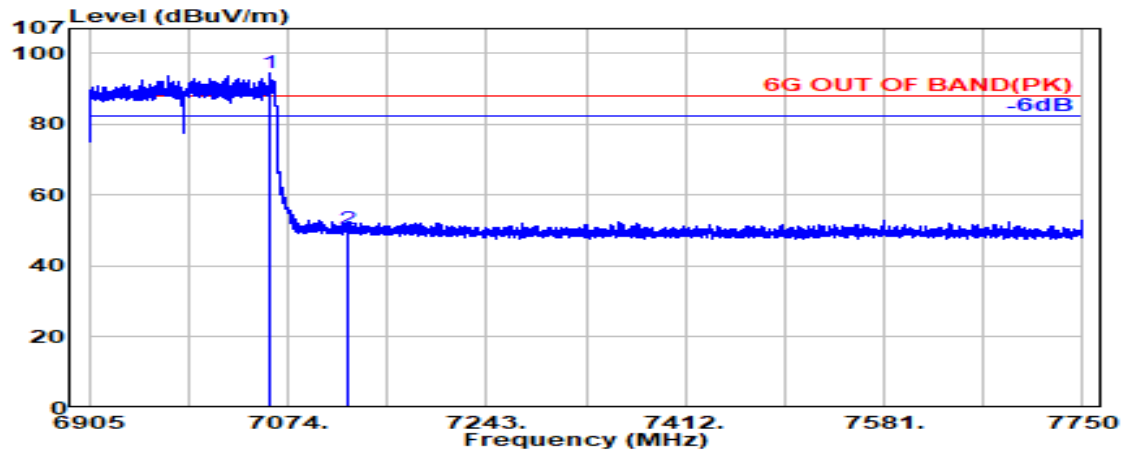

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7059.400               | 35.64                 | 9.76            | 34.44            | 83.62             | 94.57                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.36             | 50.57                   | 88.20           | 37.63       | Peak     |

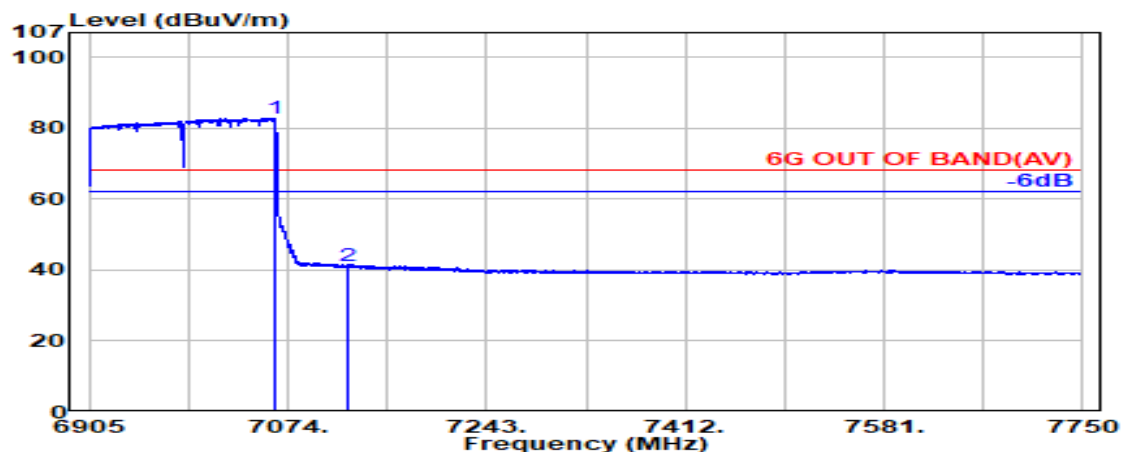

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.700               | 35.65                 | 9.76            | 34.45            | 71.98             | 82.95                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 30.00             | 41.21                   | 68.20           | 26.99       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6105MHz |

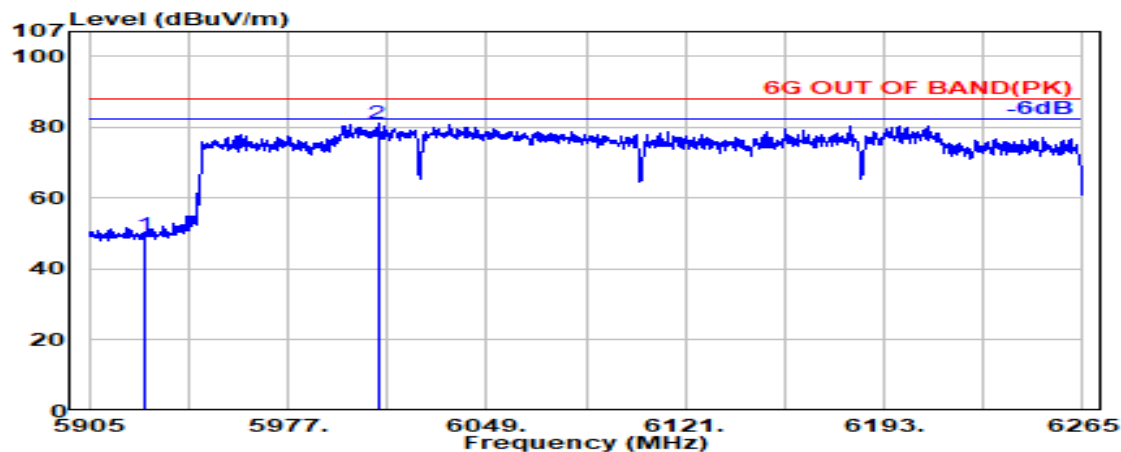

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.89             | 49.71                   | 88.20           | 38.49       | Peak     |
| @ 6009.580               | 34.20                 | 9.04            | 34.39            | 72.15             | 81.00                   | ---             | ---         | Peak     |

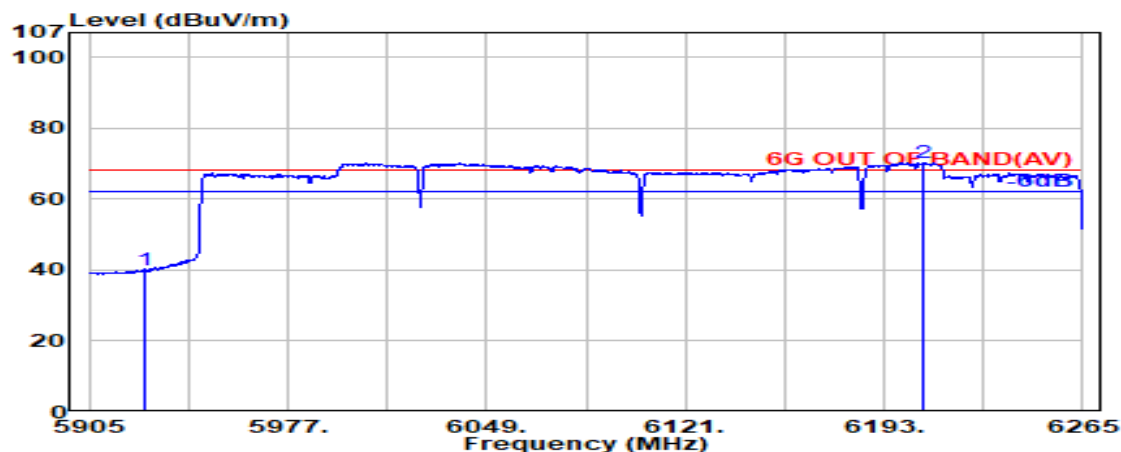

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 31.02             | 39.84                   | 68.20           | 28.36       | Average  |
| @ 6207.400               | 34.61                 | 9.18            | 34.27            | 60.75             | 70.28                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6105MHz |

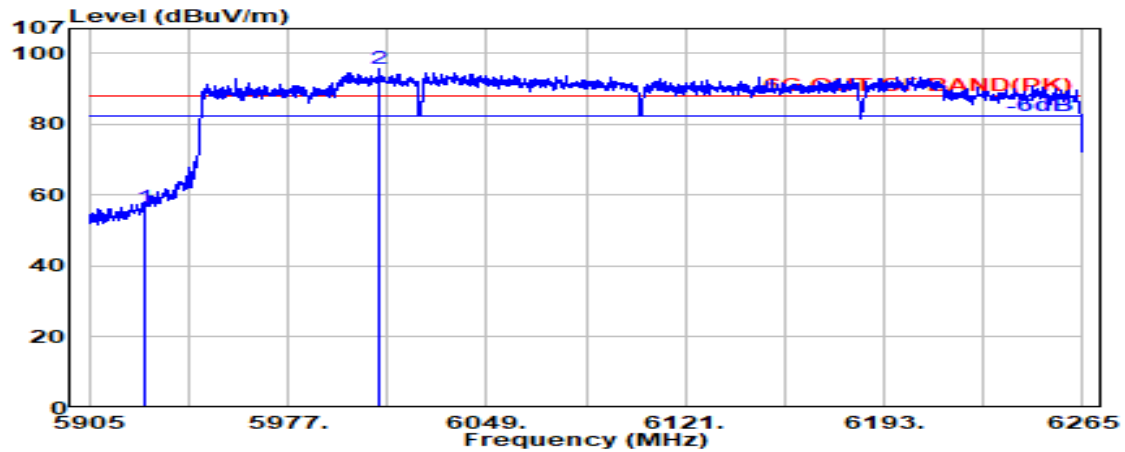

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 47.69             | 56.51                   | 88.20           | 31.69       | Peak     |
| @ 6009.940               | 34.20                 | 9.04            | 34.39                  | 86.92             | 95.76                   | ---             | ---         | Peak     |

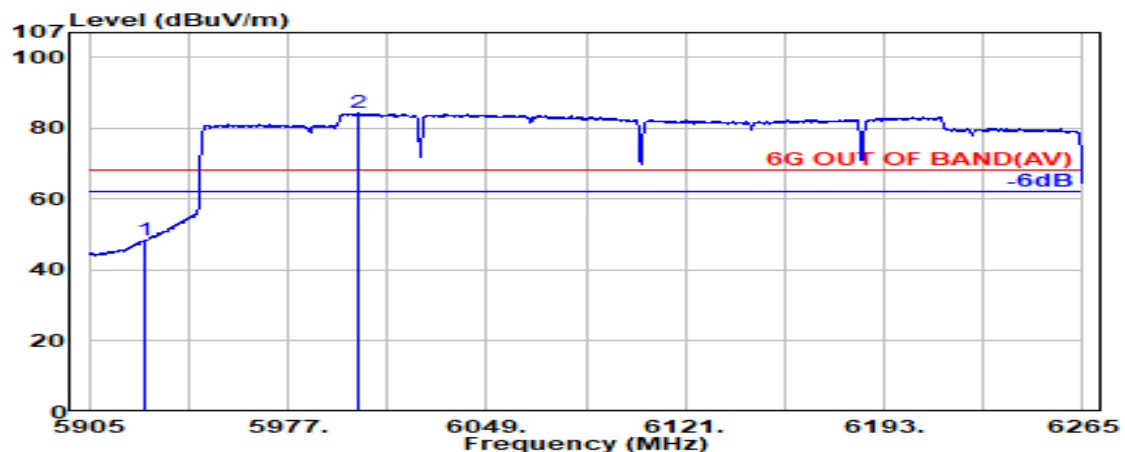

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 39.54             | 48.36                   | 68.20           | 19.84       | Average  |
| @ 6002.560               | 34.20                 | 9.03            | 34.40                  | 75.35             | 84.19                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6905MHz |

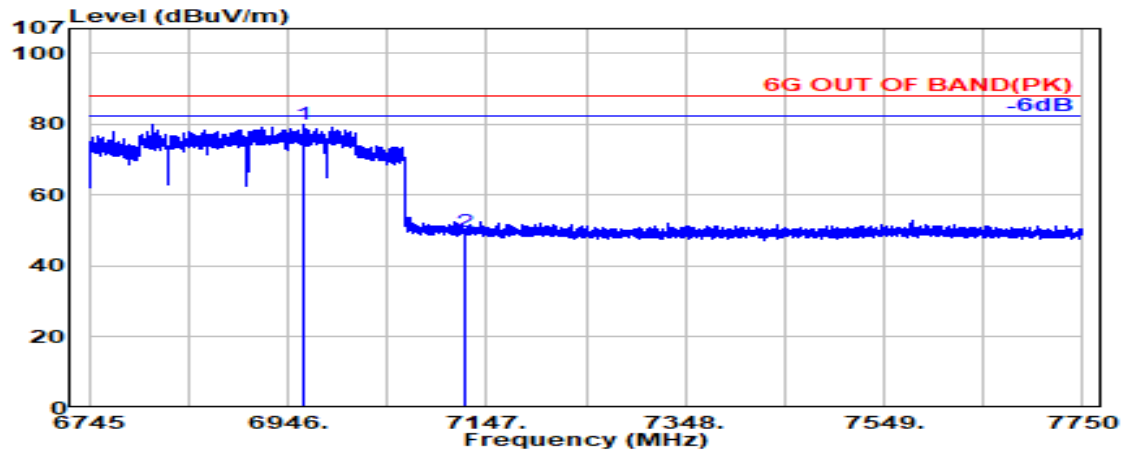

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6961.461               | 35.50                 | 9.70            | 34.38                  | 69.22             | 80.04                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.33             | 49.54                   | 88.20           | 38.66       | Peak     |

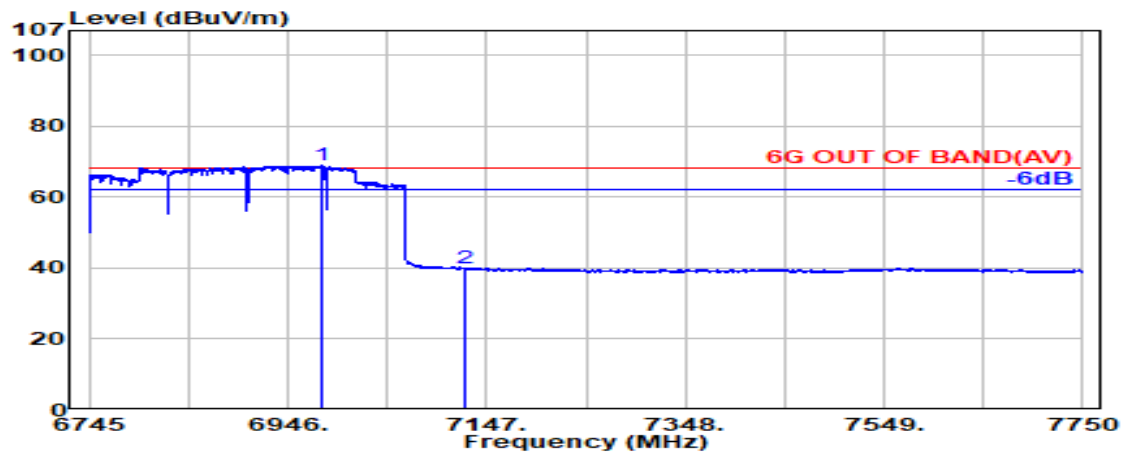

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6979.183               | 35.50                 | 9.71            | 34.39                  | 58.08             | 68.90                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.73             | 39.94                   | 68.20           | 28.26       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6905MHz |

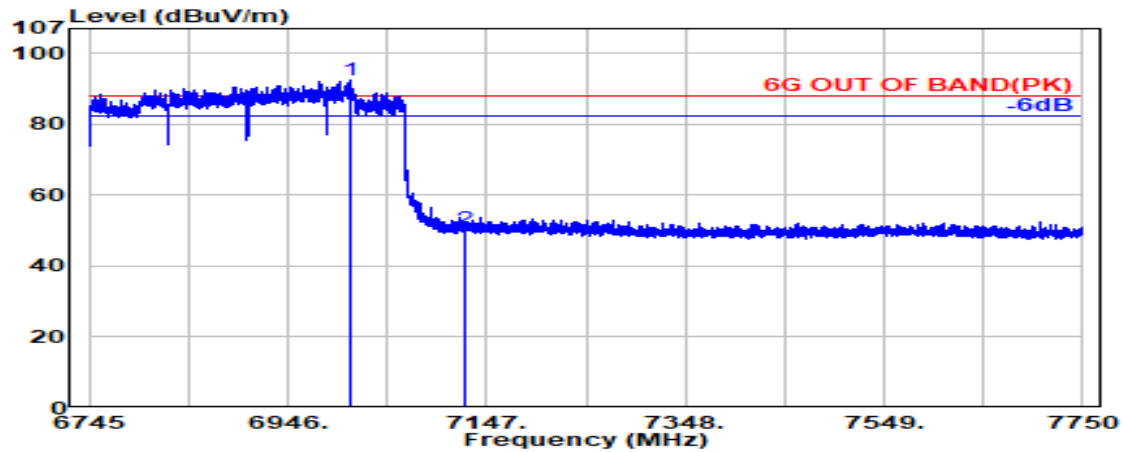

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.084               | 35.52                 | 9.73            | 34.41                  | 81.71             | 92.54                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.39             | 50.60                   | 88.20           | 37.60       | Peak     |

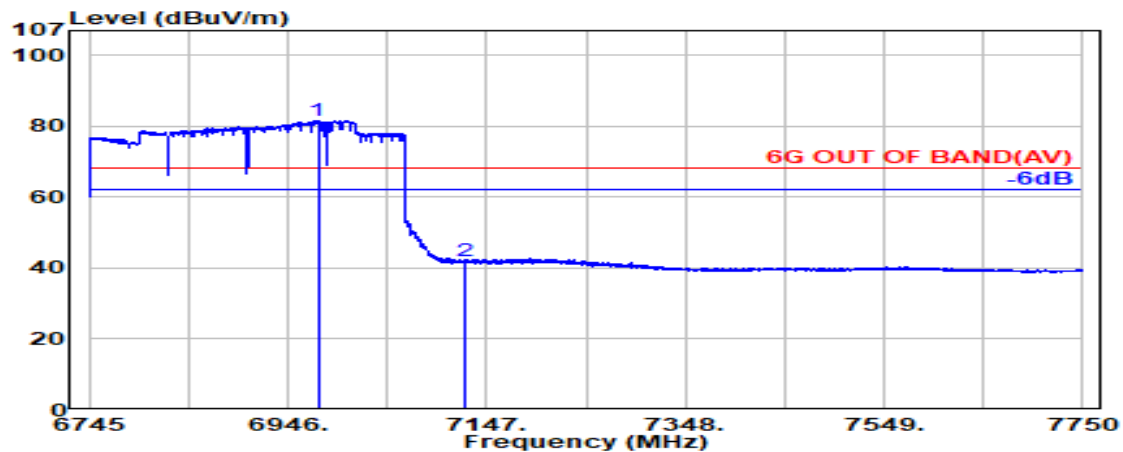

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6976.329               | 35.50                 | 9.70            | 34.39                  | 70.84             | 81.66                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.75             | 41.96                   | 68.20           | 26.24       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303


● OFDMA Modulation

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T            | RU Index   | 0          |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

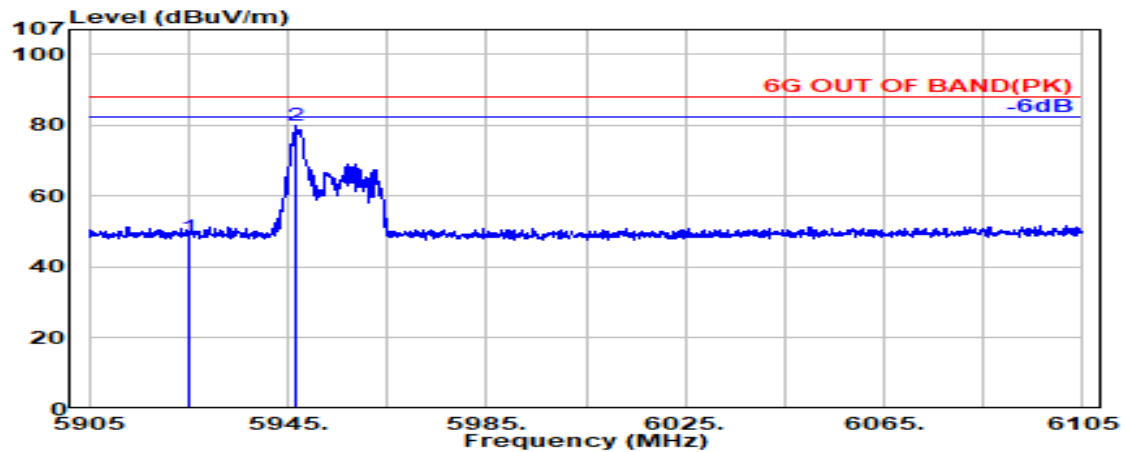

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 39.69             | 48.51                   | 88.20           | 39.69       | Peak     |
| @ 5946.800               | 34.29                 | 9.00            | 34.38            | 70.89             | 79.80                   | ---             | ---         | Peak     |

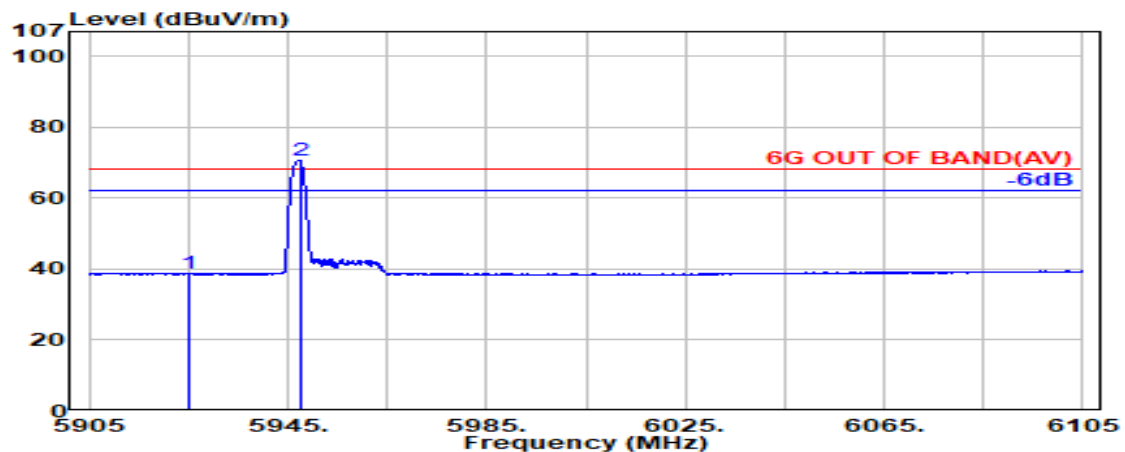

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.96             | 38.78                   | 68.20           | 29.42       | Average  |
| @ 5947.400               | 34.29                 | 9.00            | 34.38            | 61.71             | 70.62                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T            | RU Index   | 0          |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

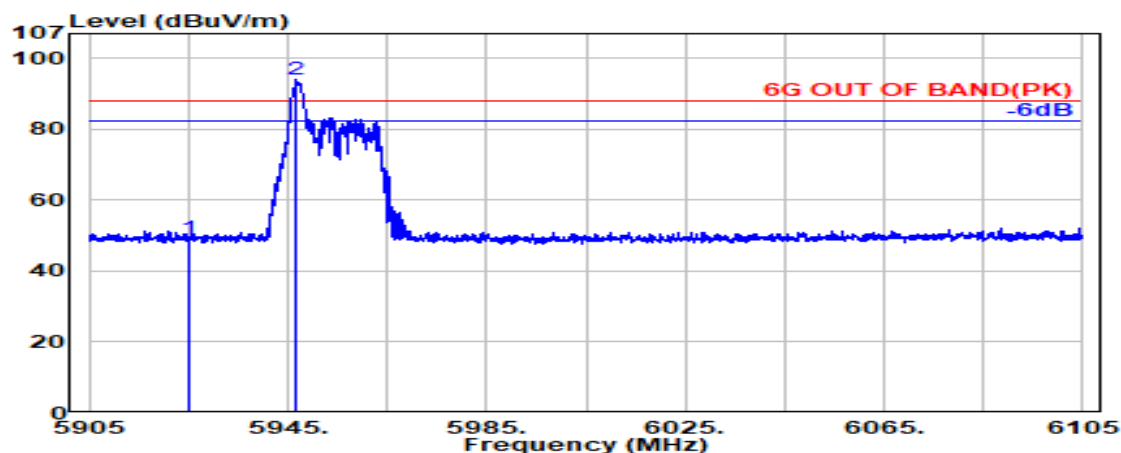

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.58             | 49.40                   | 88.20           | 38.80       | Peak     |
| @ 5946.800               | 34.29                 | 9.00            | 34.38            | 85.20             | 94.11                   | ---             | ---         | Peak     |

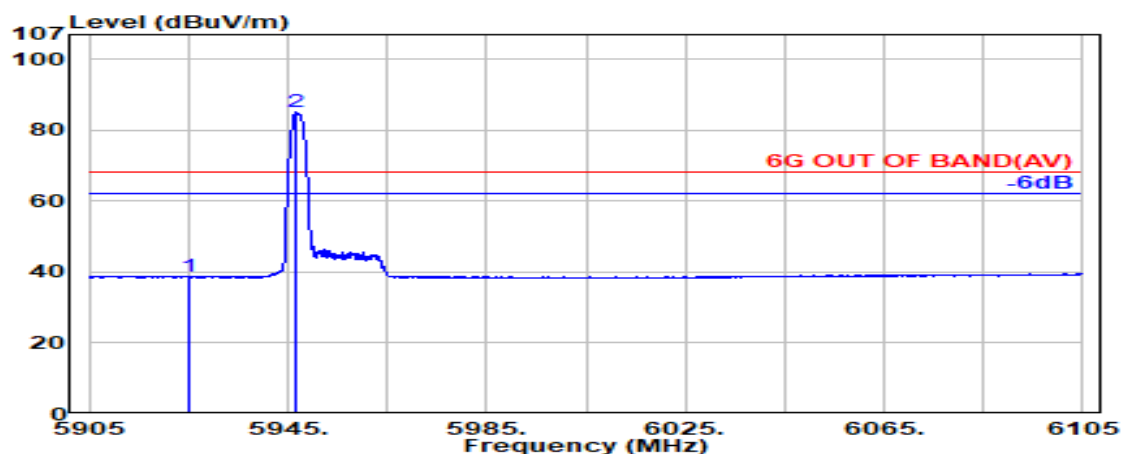

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.77             | 38.60                   | 68.20           | 29.60       | Average  |
| @ 5946.500               | 34.29                 | 9.00            | 34.38            | 76.39             | 85.30                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 36         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

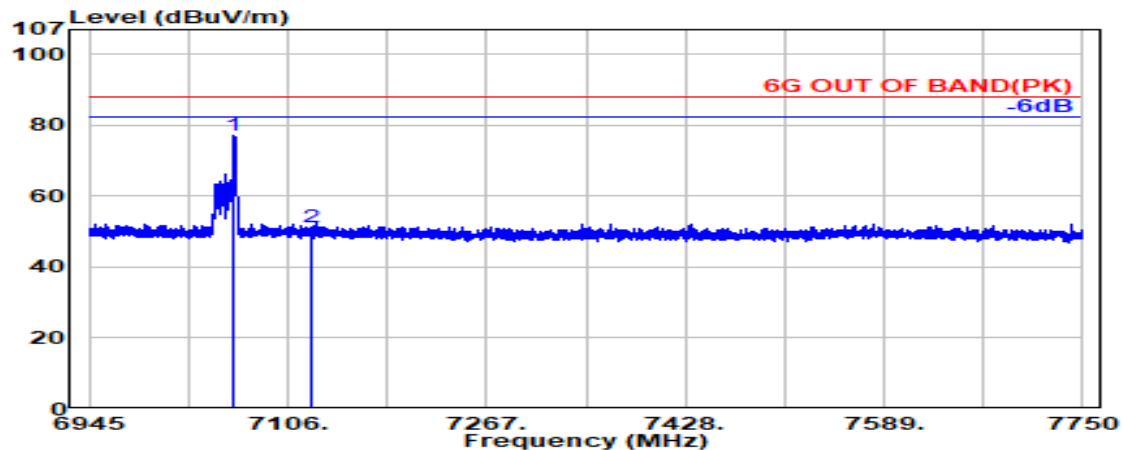

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.500                 | 35.65                 | 9.76            | 34.45                  | 66.17             | 77.13                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 39.90             | 51.12                   | 88.20           | 37.08       | Peak     |

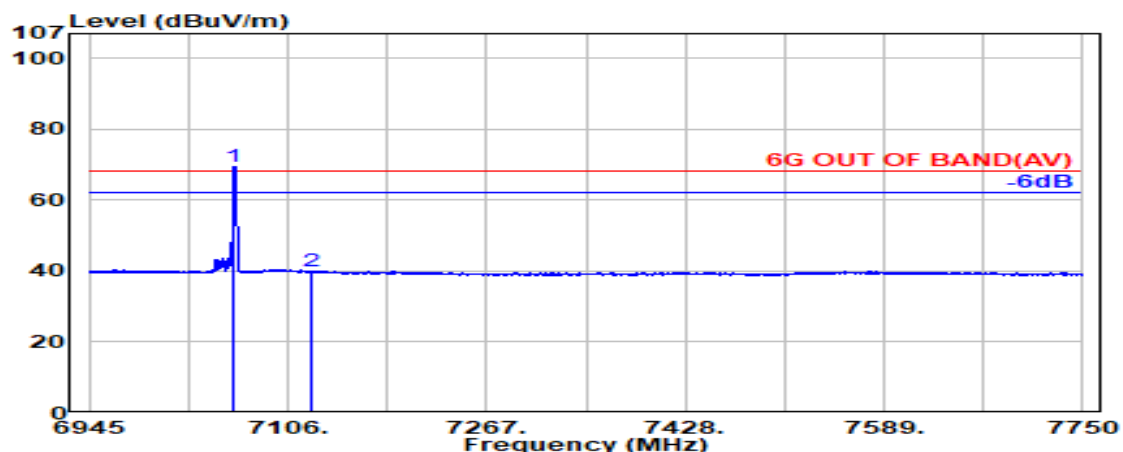

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.800                 | 35.65                 | 9.76            | 34.45                  | 58.28             | 69.25                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 28.61             | 39.82                   | 68.20           | 28.38       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 36         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

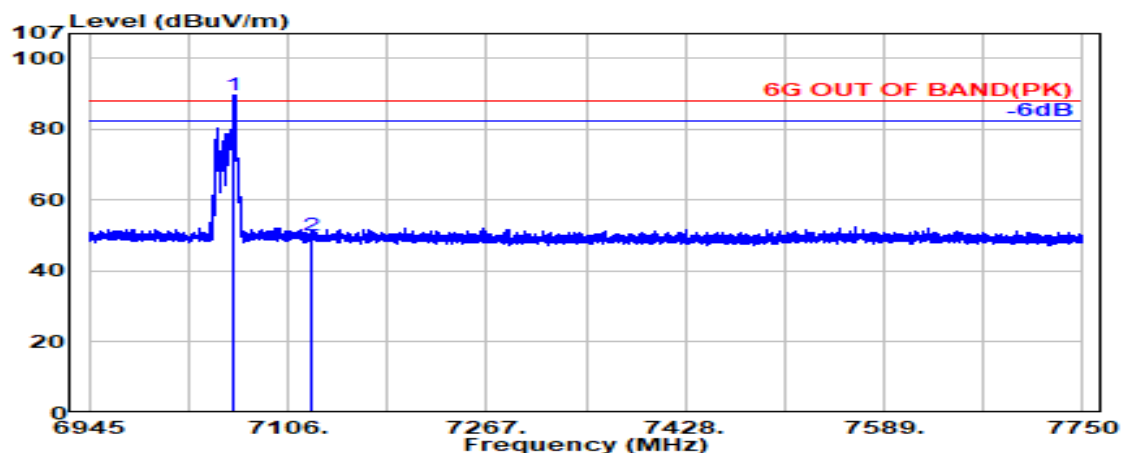

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.400                 | 35.65                 | 9.76            | 34.45                  | 78.77             | 89.74                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 38.78             | 50.00                   | 88.20           | 38.20       | Peak     |

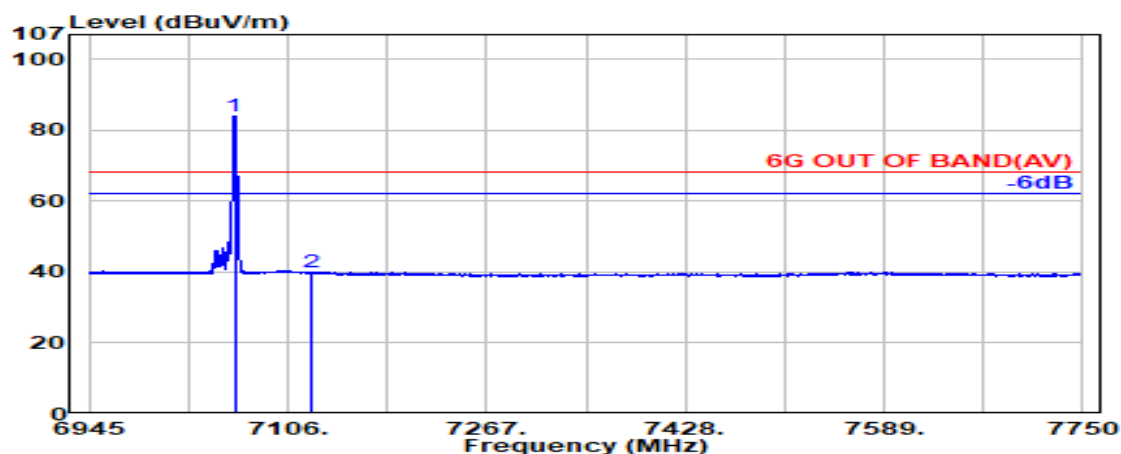

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.900                 | 35.65                 | 9.76            | 34.45                  | 73.12             | 84.09                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 28.62             | 39.83                   | 68.20           | 28.37       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

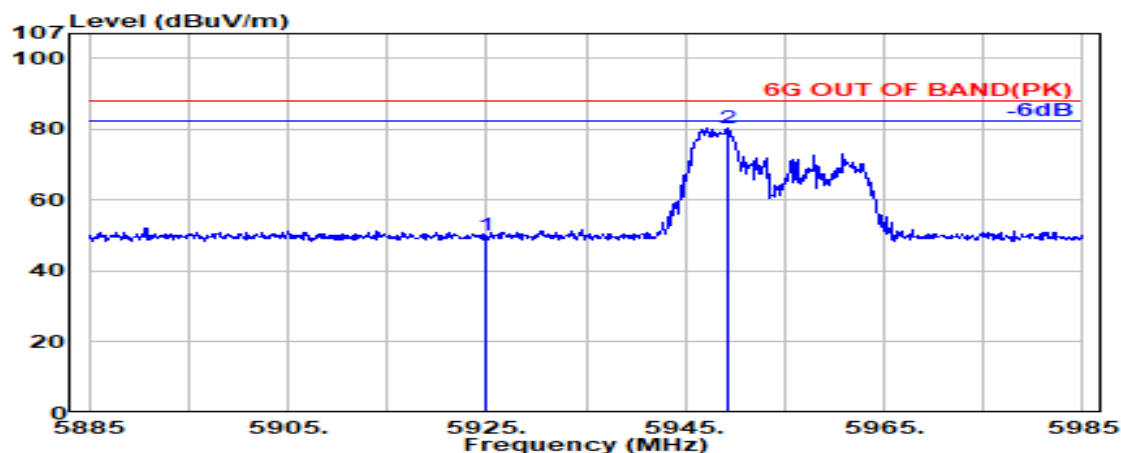

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.35             | 50.17                   | 88.20           | 38.03       | Peak     |
| @ 5949.300               | 34.30                 | 9.00            | 34.38                  | 71.34             | 80.26                   | ---             | ---         | Peak     |

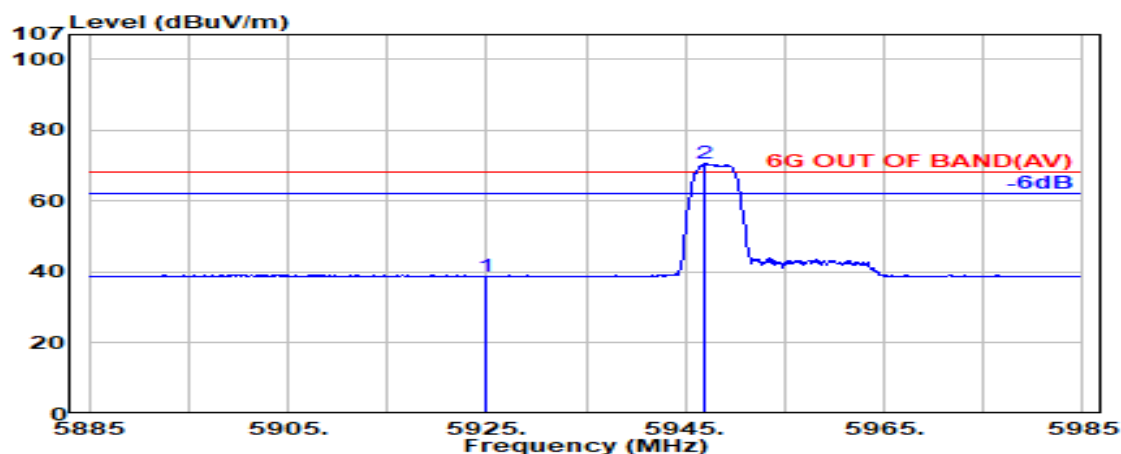

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 29.93             | 38.76                   | 68.20           | 29.44       | Average  |
| @ 5946.900               | 34.29                 | 9.00            | 34.38                  | 61.57             | 70.48                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

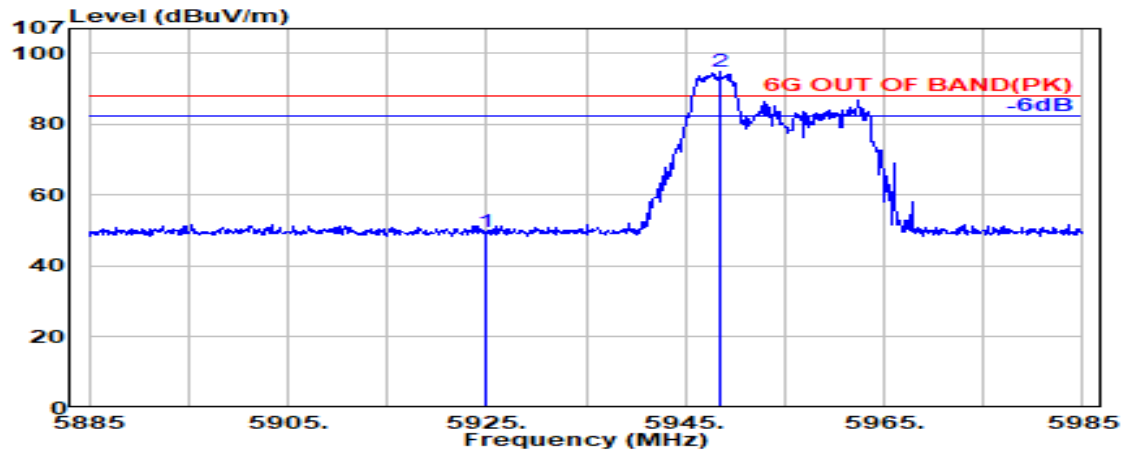

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.74             | 49.56                   | 88.20           | 38.64       | Peak     |
| @ 5948.500               | 34.29                 | 9.00            | 34.38            | 85.83             | 94.75                   | ---             | ---         | Peak     |

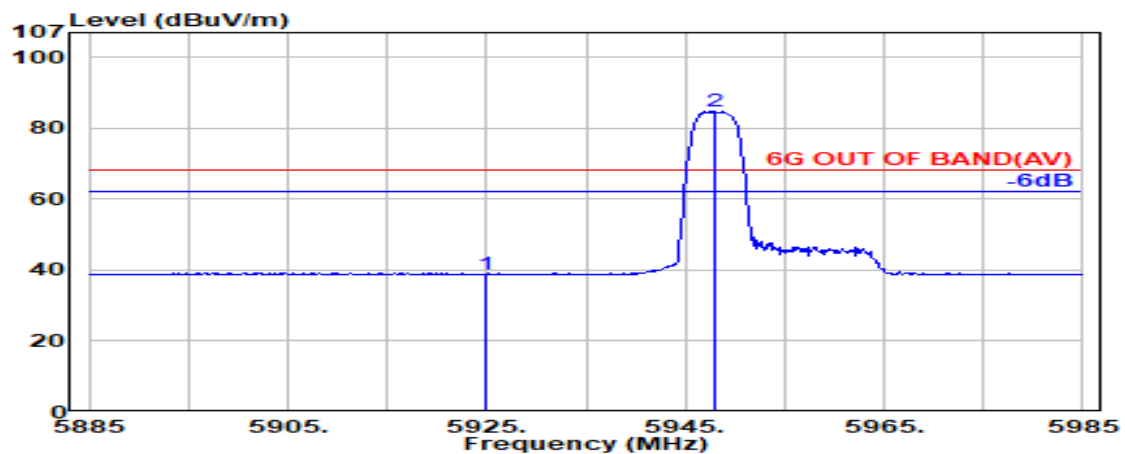

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.98             | 38.80                   | 68.20           | 29.40       | Average  |
| @ 5947.900               | 34.29                 | 9.00            | 34.38            | 75.87             | 84.79                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 52         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

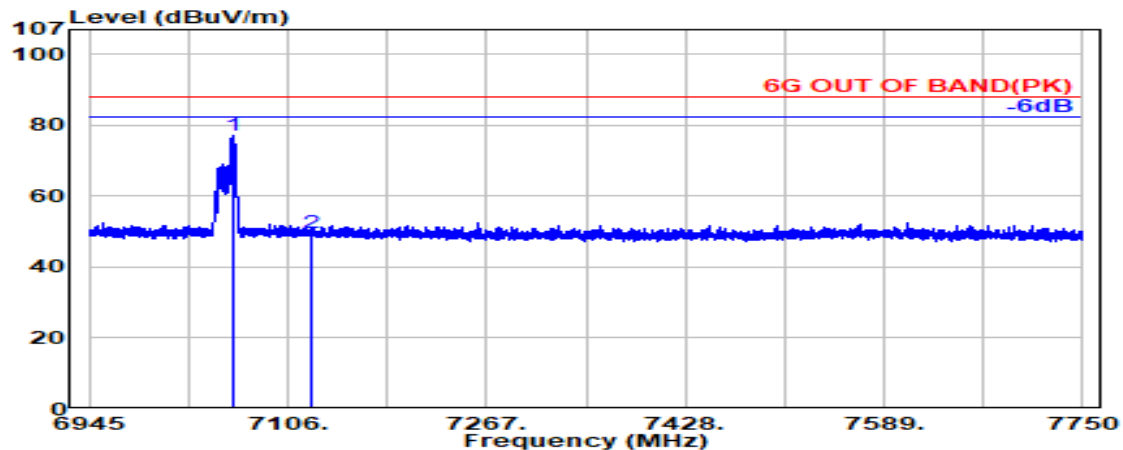

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.800               | 35.65                 | 9.76            | 34.44                  | 66.36             | 77.32                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.43             | 49.65                   | 88.20           | 38.55       | Peak     |

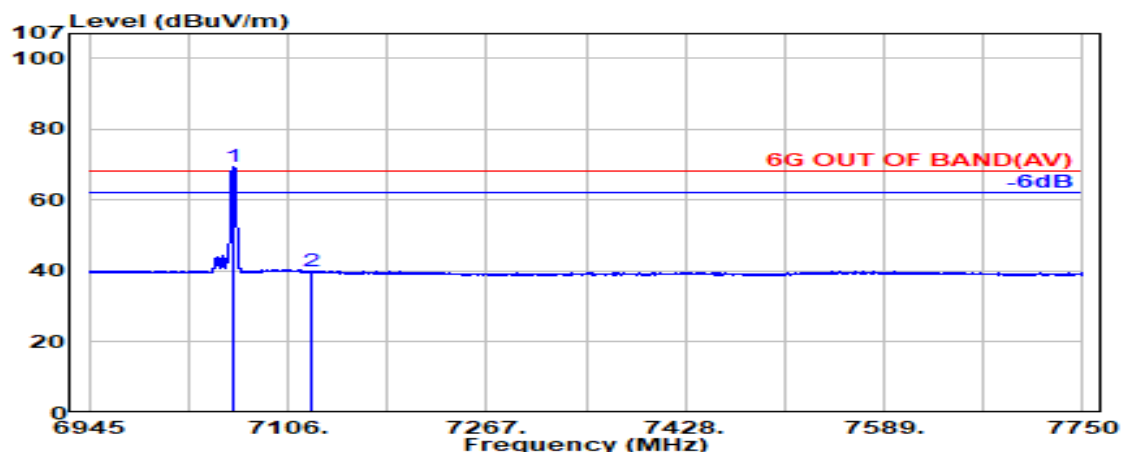

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.600               | 35.65                 | 9.76            | 34.44                  | 58.44             | 69.40                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.60             | 39.81                   | 68.20           | 28.39       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 52         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

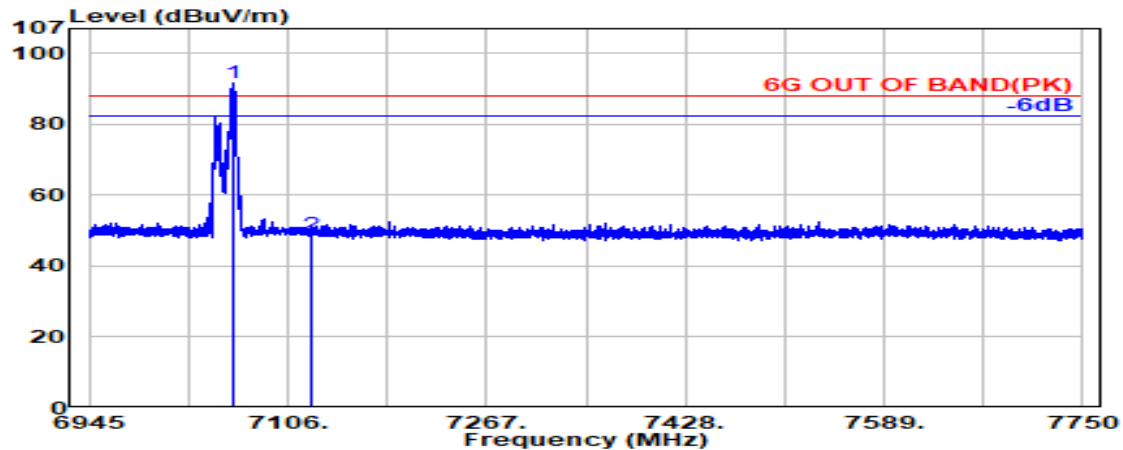

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.300               | 35.65                 | 9.76            | 34.44                  | 80.57             | 91.53                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 37.57             | 48.78                   | 88.20           | 39.42       | Peak     |

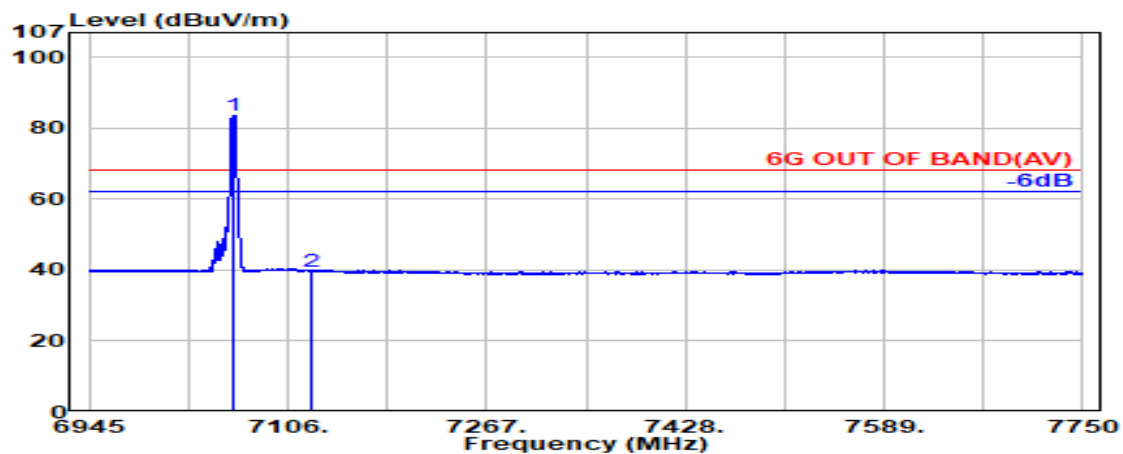

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.300               | 35.65                 | 9.76            | 34.44                  | 72.81             | 83.77                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.56             | 39.77                   | 68.20           | 28.43       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

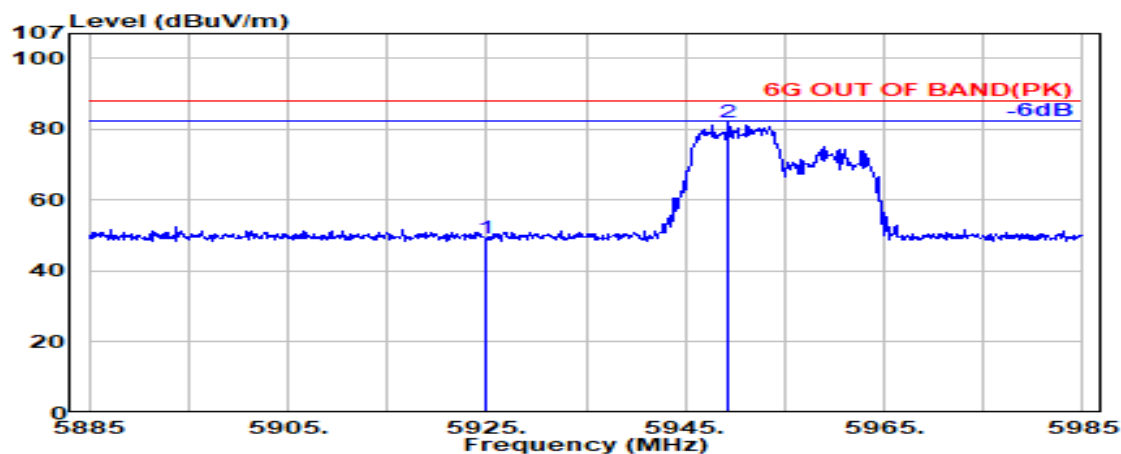

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.33             | 49.15                   | 88.20           | 39.05       | Peak     |
| @ 5949.400               | 34.30                 | 9.00            | 34.38                  | 73.10             | 82.03                   | ---             | ---         | Peak     |

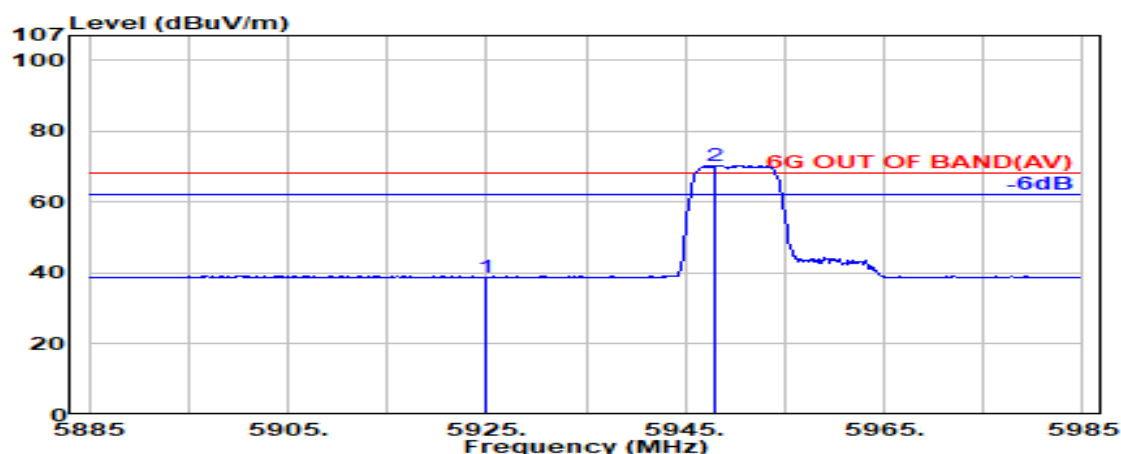

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.01             | 38.83                   | 68.20           | 29.37       | Average  |
| @ 5948.000               | 34.29                 | 9.00            | 34.38                  | 61.46             | 70.38                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

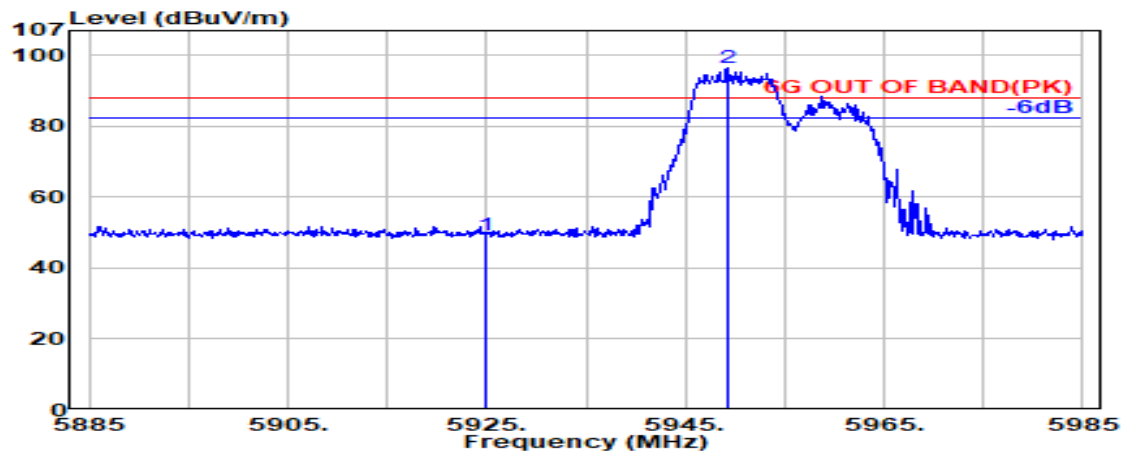

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.55             | 49.37                   | 88.20           | 38.83       | Peak     |
| @ 5949.300               | 34.30                 | 9.00            | 34.38                  | 87.65             | 96.58                   | ---             | ---         | Peak     |

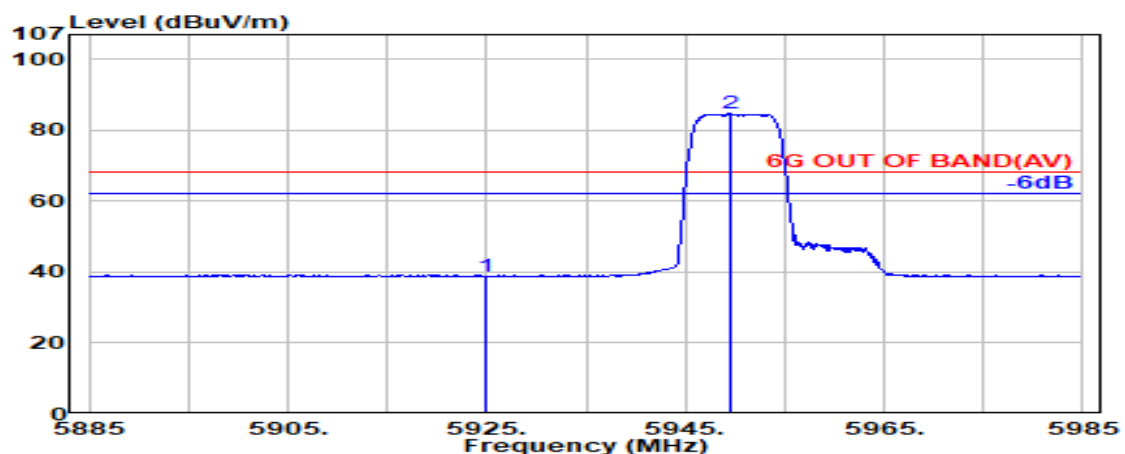

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.01             | 38.83                   | 68.20           | 29.37       | Average  |
| @ 5949.500               | 34.30                 | 9.00            | 34.38                  | 75.78             | 84.71                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 60         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

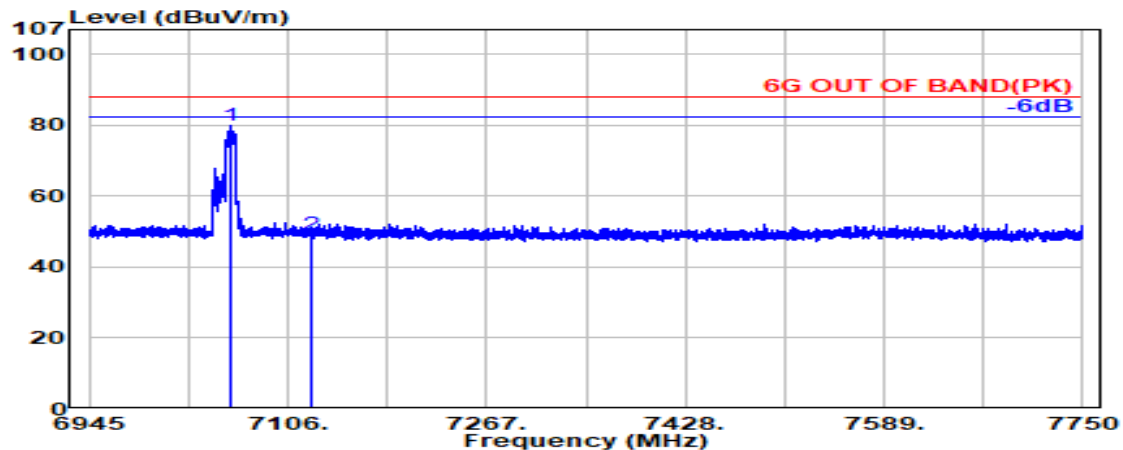

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7058.700               | 35.63                 | 9.76            | 34.44            | 68.94             | 79.89                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.03             | 49.24                   | 88.20           | 38.96       | Peak     |

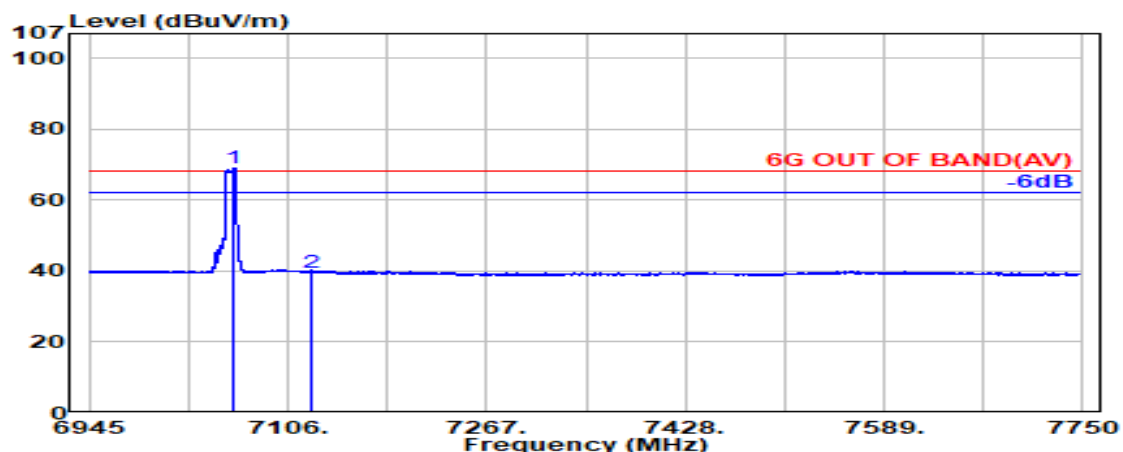

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.900               | 35.65                 | 9.76            | 34.44            | 58.24             | 69.20                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.52             | 39.73                   | 68.20           | 28.47       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 60         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

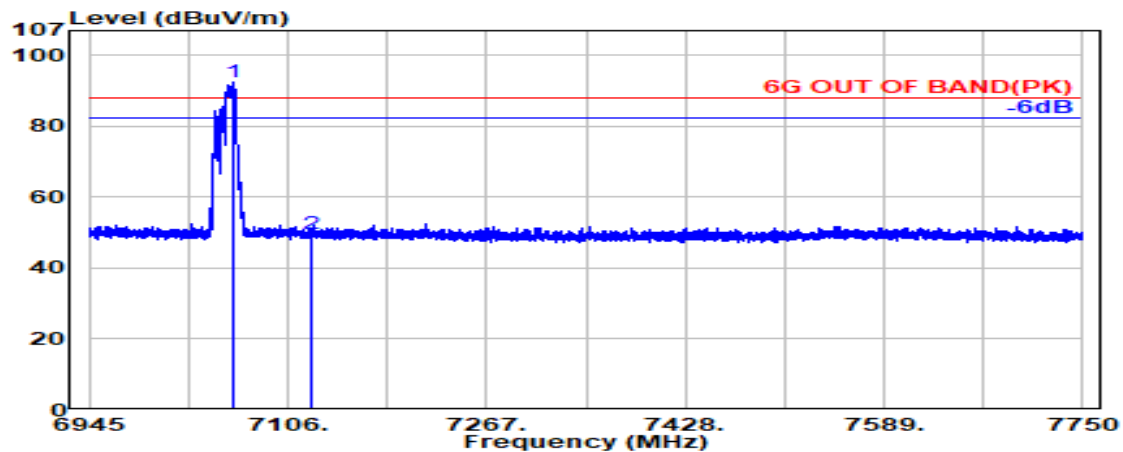

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.000               | 35.65                 | 9.76            | 34.44                  | 81.39             | 92.35                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.41             | 49.62                   | 88.20           | 38.58       | Peak     |

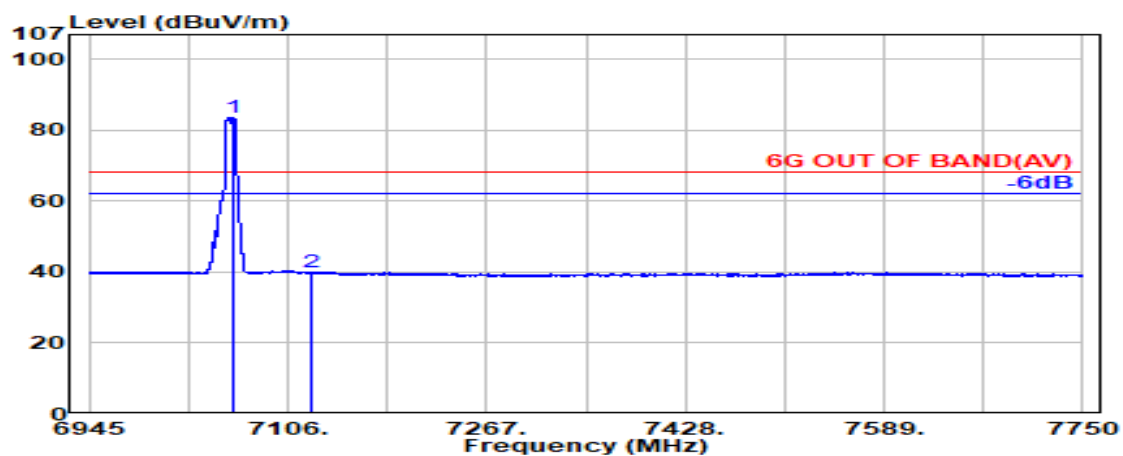

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.700               | 35.65                 | 9.76            | 34.44                  | 72.77             | 83.73                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.64             | 39.85                   | 58.20           | 18.35       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

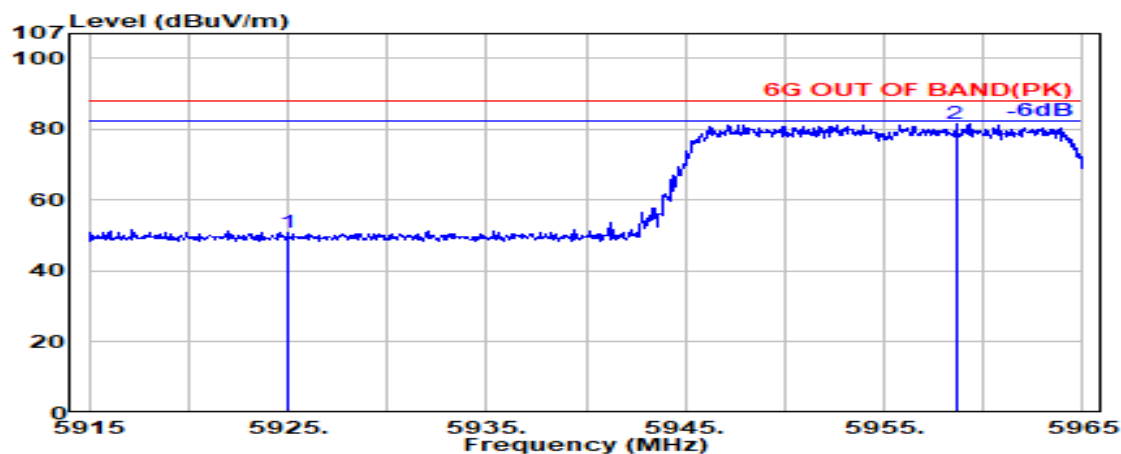

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.94             | 50.76                   | 88.20           | 37.44       | Peak     |
| @ 5958.600               | 34.28                 | 9.01            | 34.38            | 72.67             | 81.58                   | ---             | ---         | Peak     |

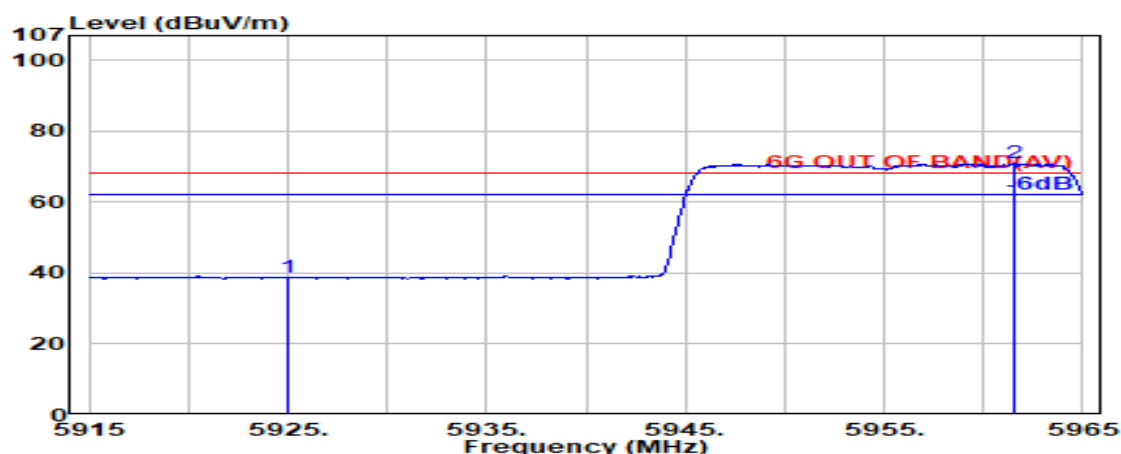

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.95             | 38.77                   | 68.20           | 29.43       | Average  |
| @ 5961.550               | 34.28                 | 9.01            | 34.38            | 61.98             | 70.89                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

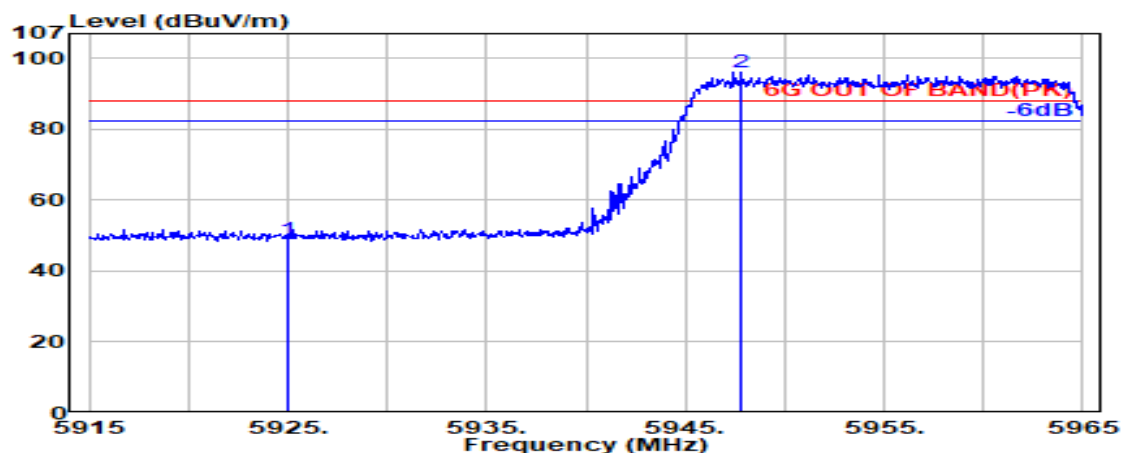

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.19             | 49.01                   | 88.20           | 39.19       | Peak     |
| @ 5947.850               | 34.29                 | 9.00            | 34.38            | 87.13             | 96.05                   | ---             | ---         | Peak     |

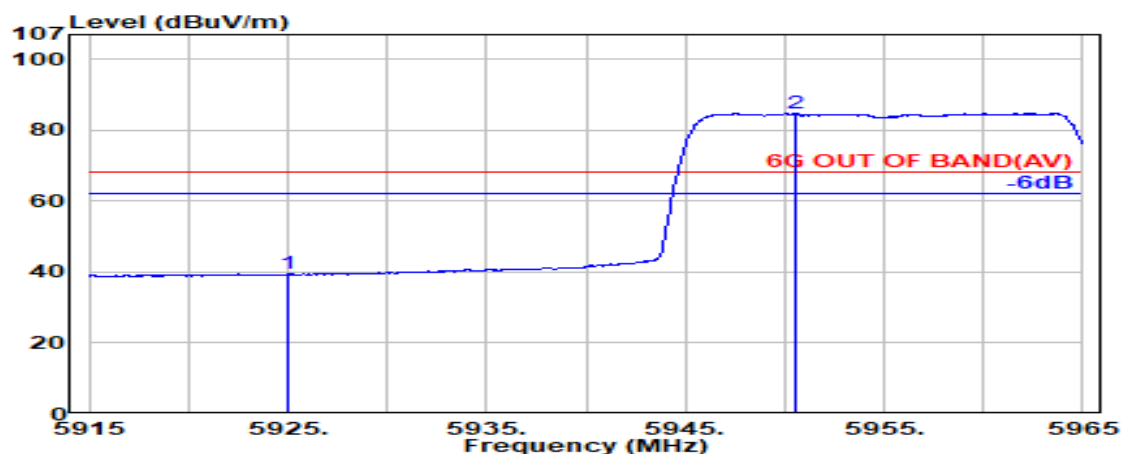

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.57             | 39.39                   | 68.20           | 28.81       | Average  |
| @ 5950.600               | 34.30                 | 9.00            | 34.38            | 76.04             | 84.97                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 64         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

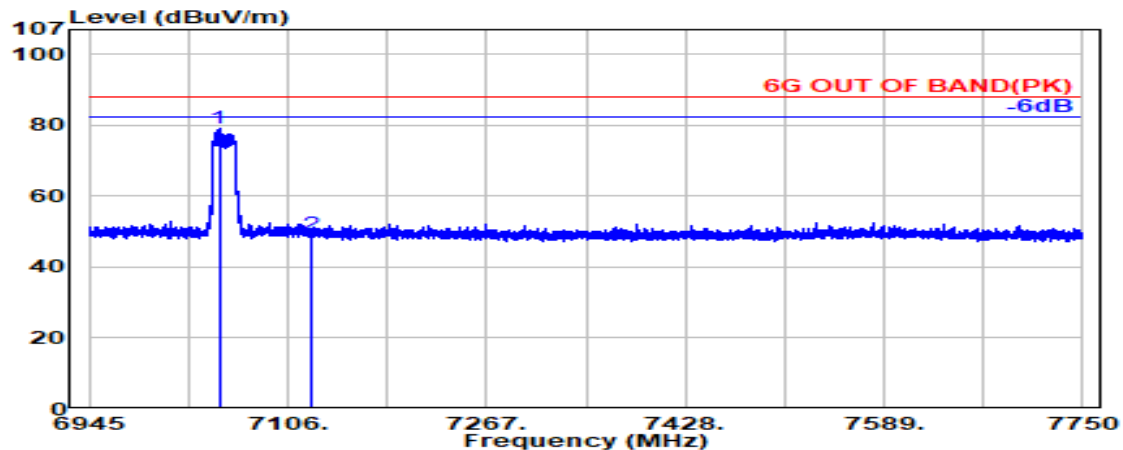

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7050.200               | 35.60                 | 9.75            | 34.44            | 68.27             | 79.19                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.06             | 49.27                   | 88.20           | 38.93       | Peak     |

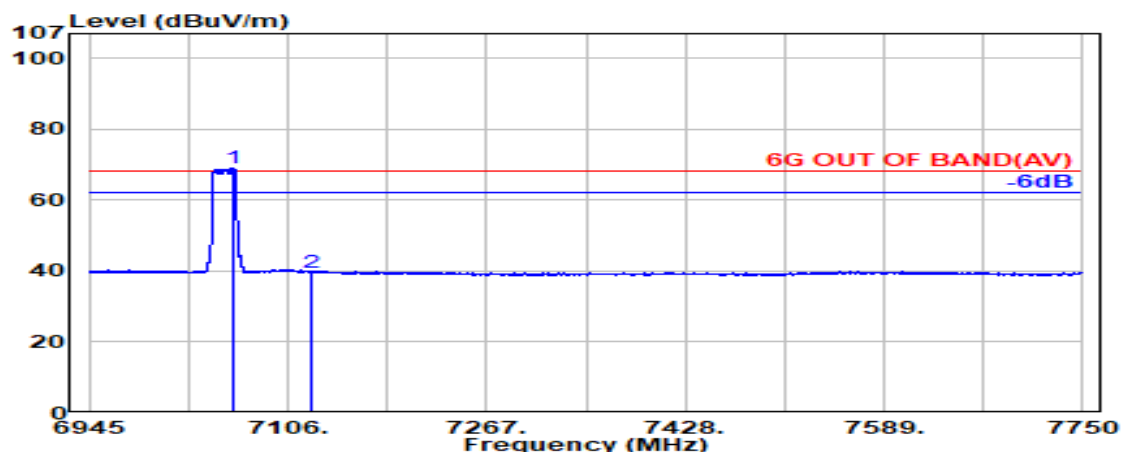

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.500               | 35.65                 | 9.76            | 34.44            | 57.93             | 68.89                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.50             | 39.71                   | 68.20           | 28.49       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 64         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

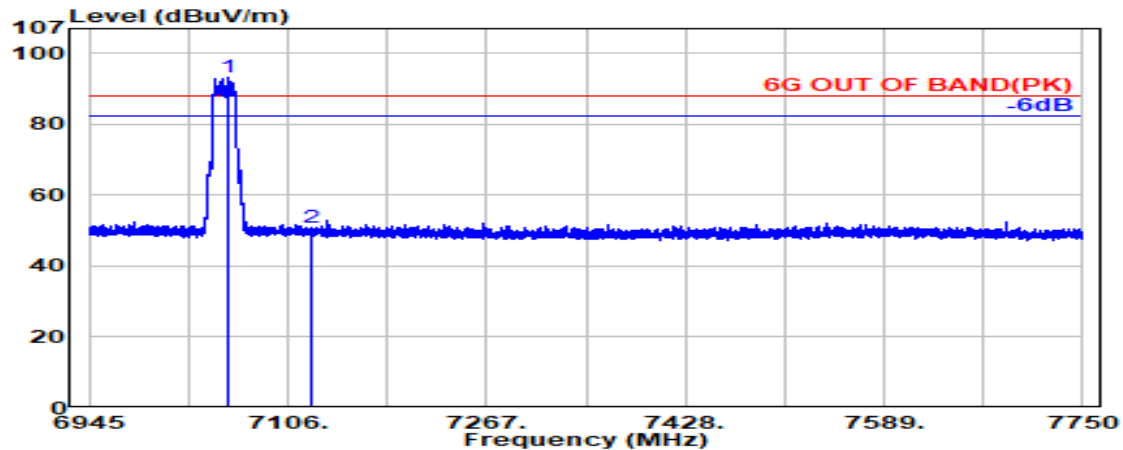

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7057.700               | 35.63                 | 9.76            | 34.44            | 82.19             | 93.14                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.56             | 50.77                   | 88.20           | 37.43       | Peak     |

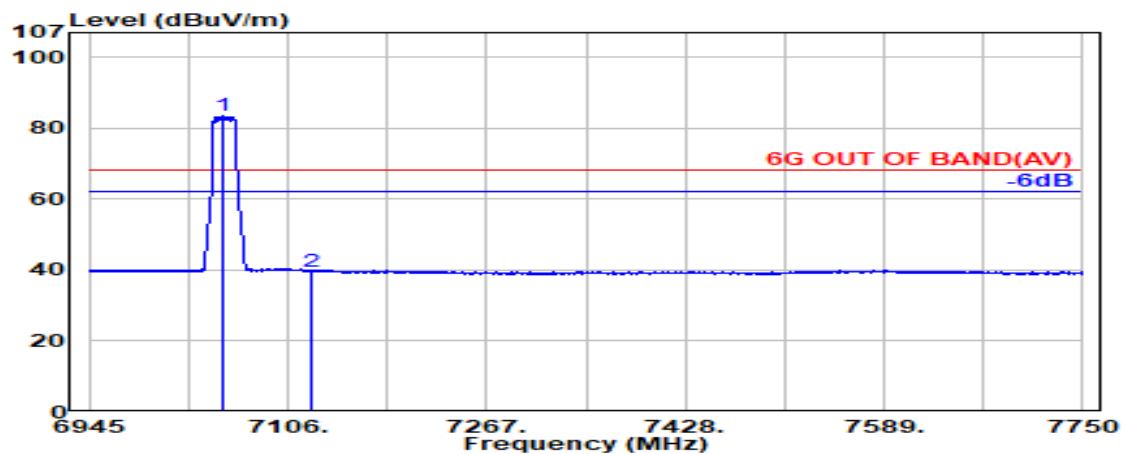

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7052.400               | 35.61                 | 9.75            | 34.44            | 72.51             | 83.43                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.54             | 39.75                   | 68.20           | 28.45       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |           |
|-------|---------------|------------|-----------|
| Tones | 484T          | RU Index   | 65        |
| Mode  | 802.11ax-HE40 | U-NII Band | 5         |
|       |               | Frequency  | TX5965MHz |

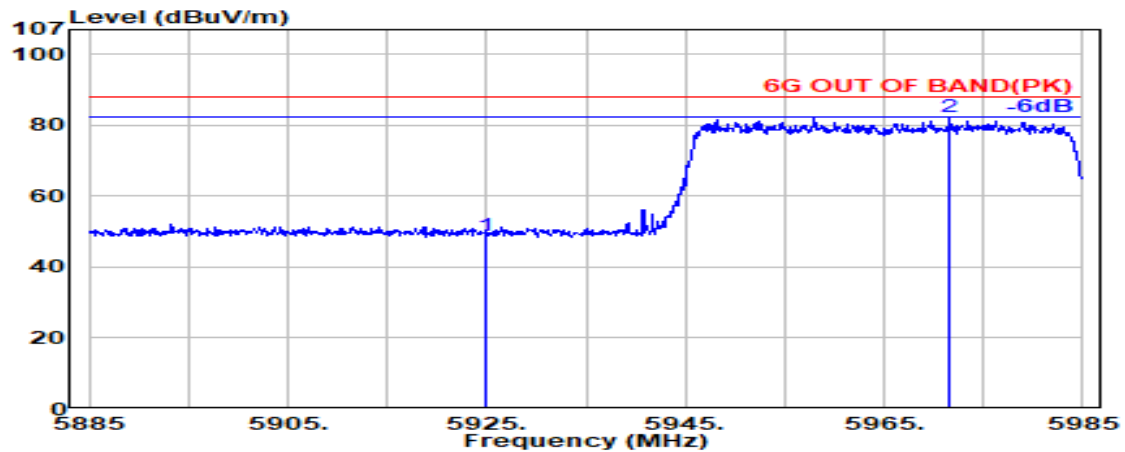

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.04             | 48.86                   | 88.20           | 39.34       | Peak     |
| @ 5971.600               | 34.26                 | 9.01            | 34.39            | 73.43             | 82.31                   | ---             | ---         | Peak     |

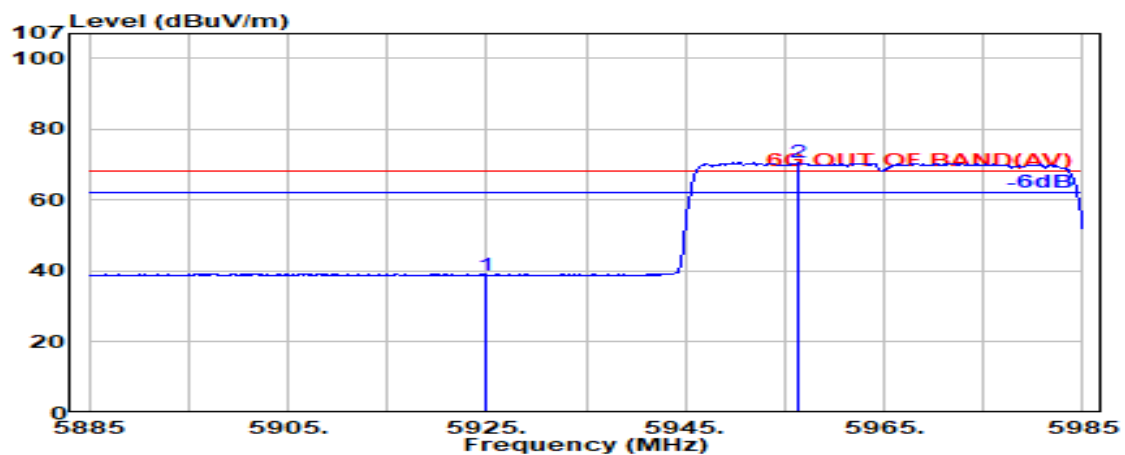

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.12             | 38.94                   | 68.20           | 29.26       | Average  |
| @ 5956.400               | 34.29                 | 9.01            | 34.38            | 61.70             | 70.62                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |           |
|-------|---------------|------------|-----------|
| Tones | 484T          | RU Index   | 65        |
| Mode  | 802.11ax-HE40 | U-NII Band | 5         |
|       |               | Frequency  | TX5965MHz |

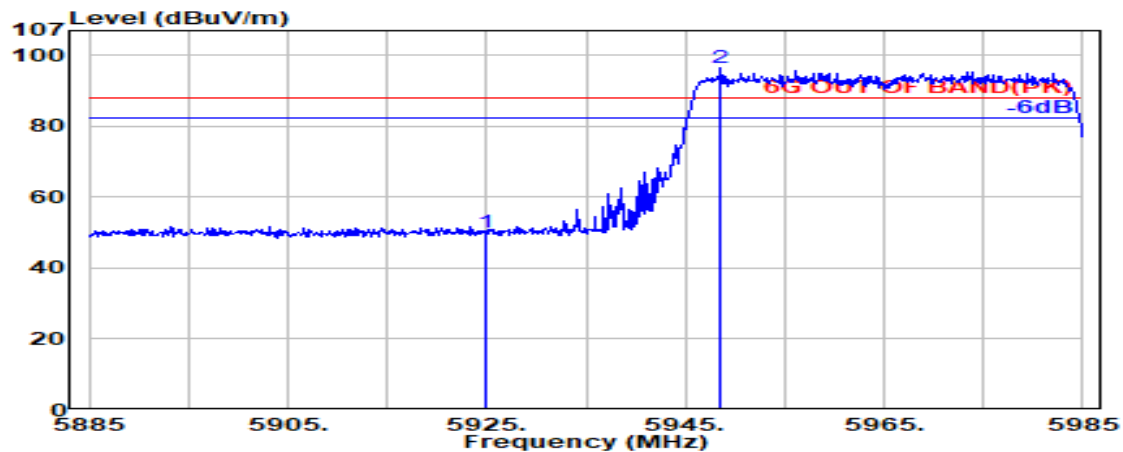

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.26             | 50.09                   | 88.20           | 38.11       | Peak     |
| @ 5948.500               | 34.29                 | 9.00            | 34.38            | 87.67             | 96.59                   | ---             | ---         | Peak     |

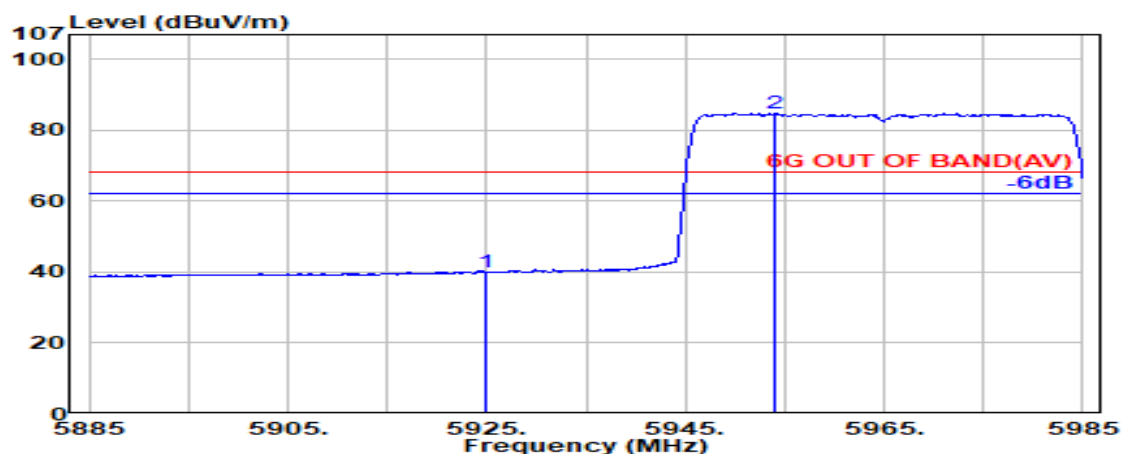

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 31.21             | 40.04                   | 68.20           | 28.16       | Average  |
| @ 5954.000               | 34.29                 | 9.01            | 34.38            | 75.83             | 84.75                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 66         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

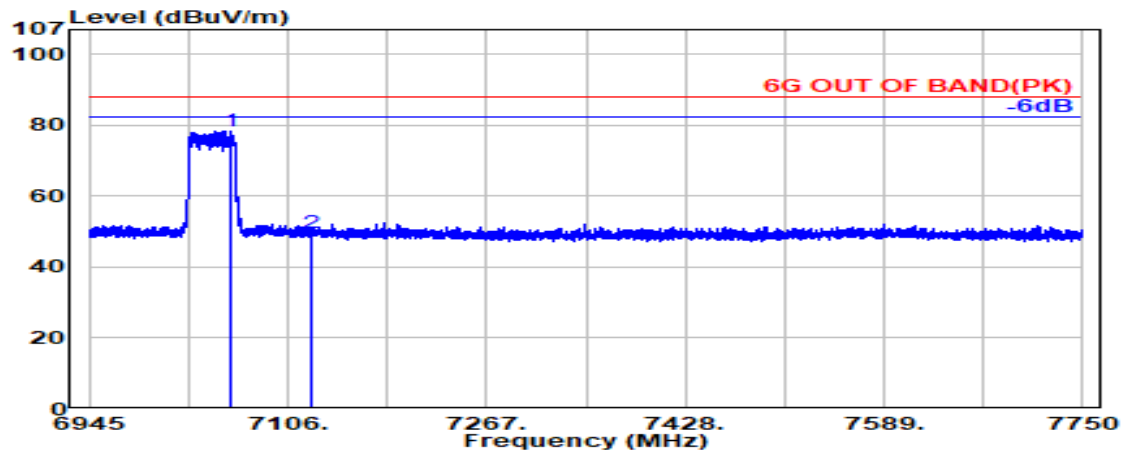

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7060.300               | 35.64                 | 9.76            | 34.44                  | 67.57             | 78.53                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.54             | 49.75                   | 88.20           | 38.45       | Peak     |

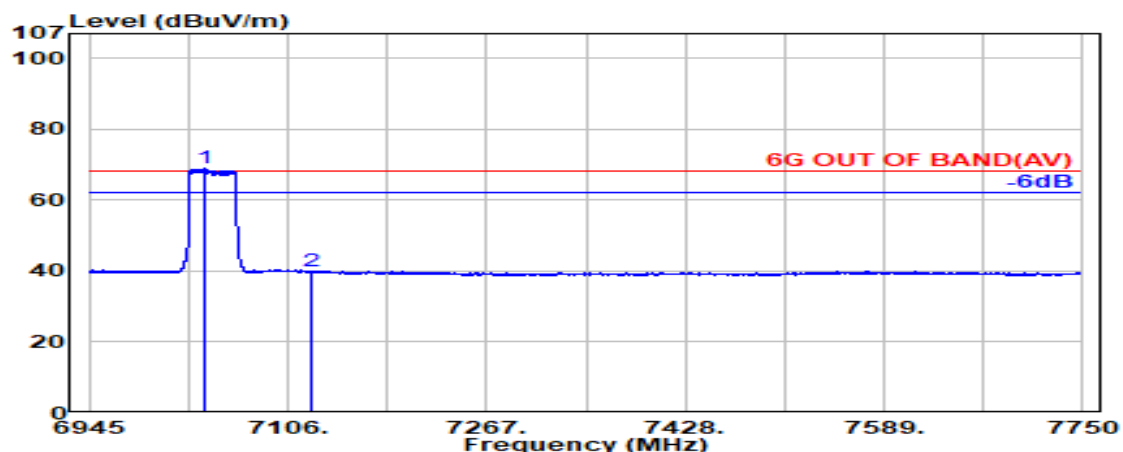

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7039.100               | 35.58                 | 9.75            | 34.43                  | 57.95             | 68.85                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.56             | 39.78                   | 68.20           | 28.42       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 66         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

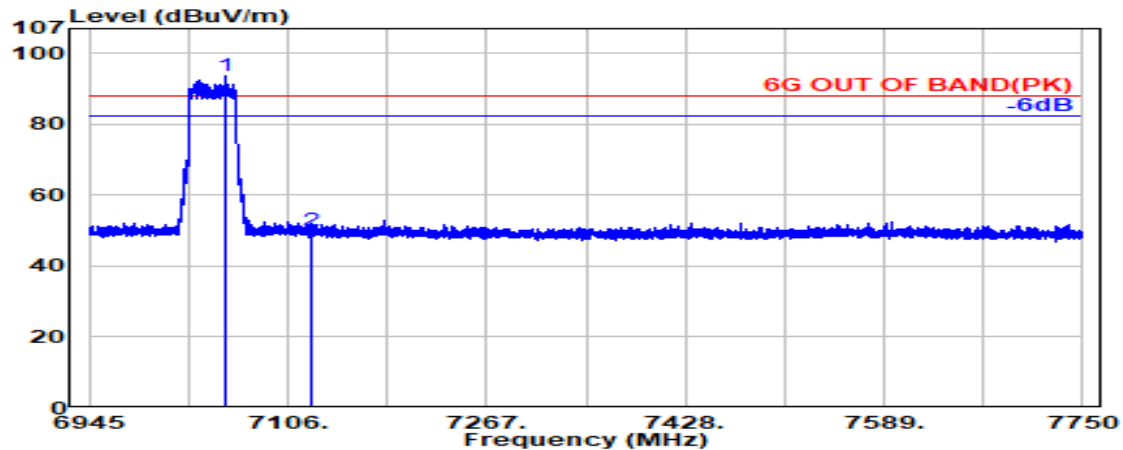

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7055.200               | 35.62                 | 9.76            | 34.44            | 82.55             | 93.49                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.75             | 49.97                   | 88.20           | 38.23       | Peak     |

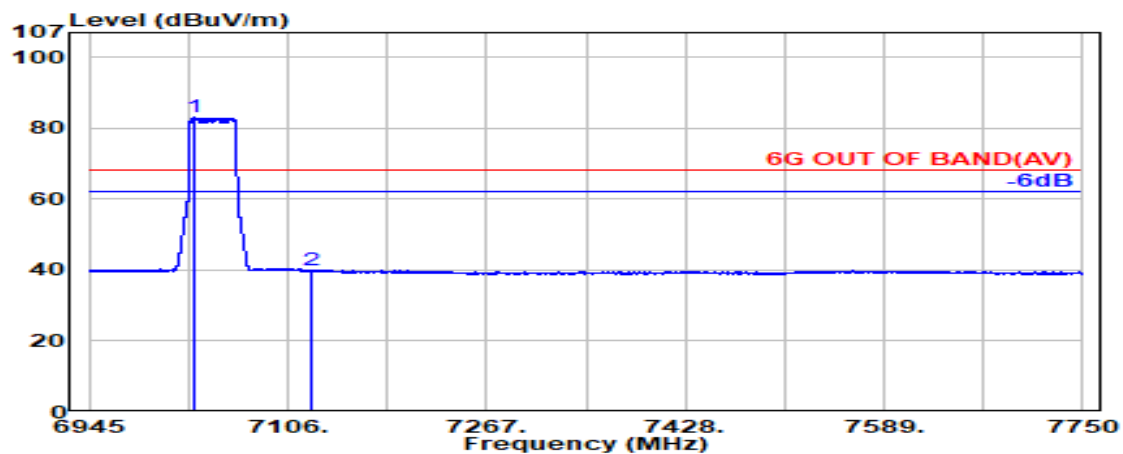

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7030.300               | 35.56                 | 9.74            | 34.42            | 72.14             | 83.02                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.62             | 39.83                   | 68.20           | 28.37       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

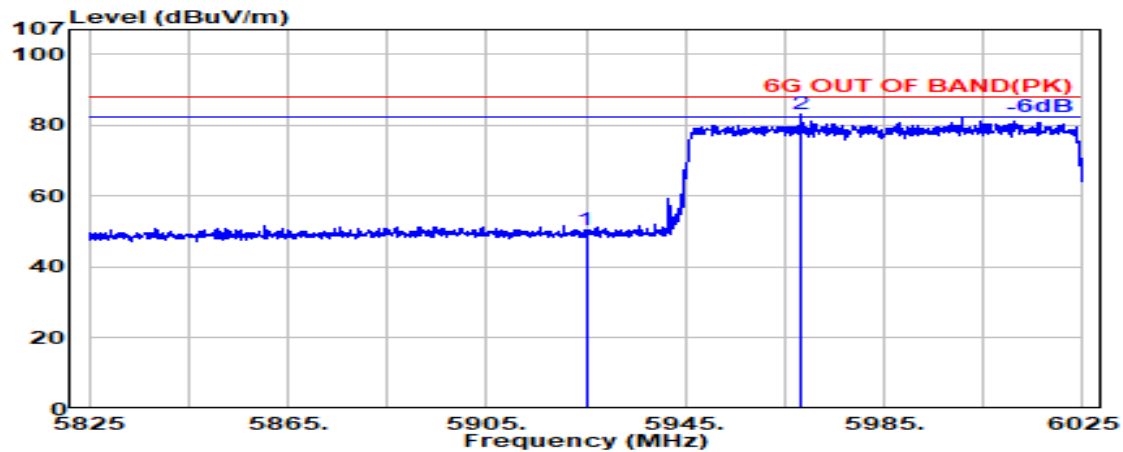

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.47             | 50.29                   | 88.20           | 37.91       | Peak     |
| @ 5968.400               | 34.26                 | 9.01            | 34.39            | 74.35             | 83.24                   | ---             | ---         | Peak     |

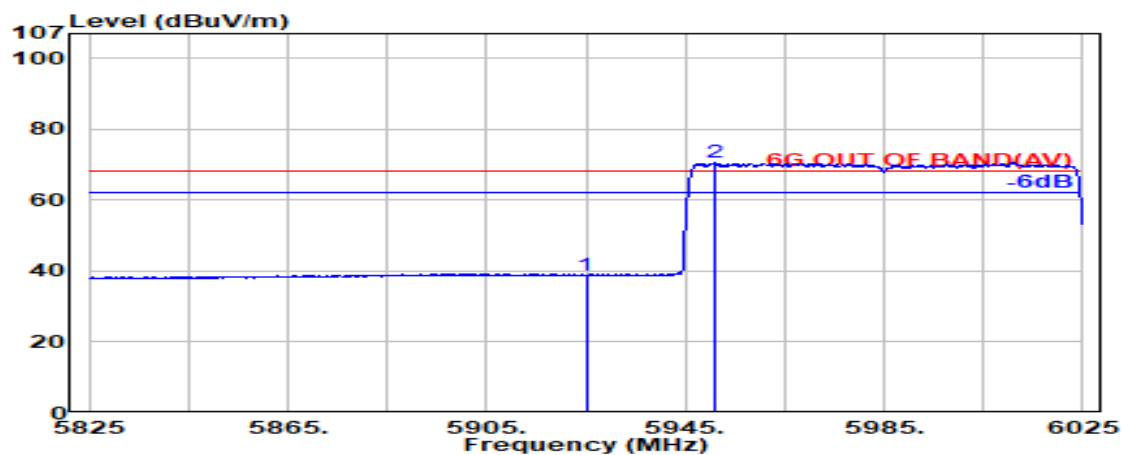

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.89             | 38.71                   | 68.20           | 29.49       | Average  |
| @ 5950.800               | 34.30                 | 9.00            | 34.38            | 61.62             | 70.54                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

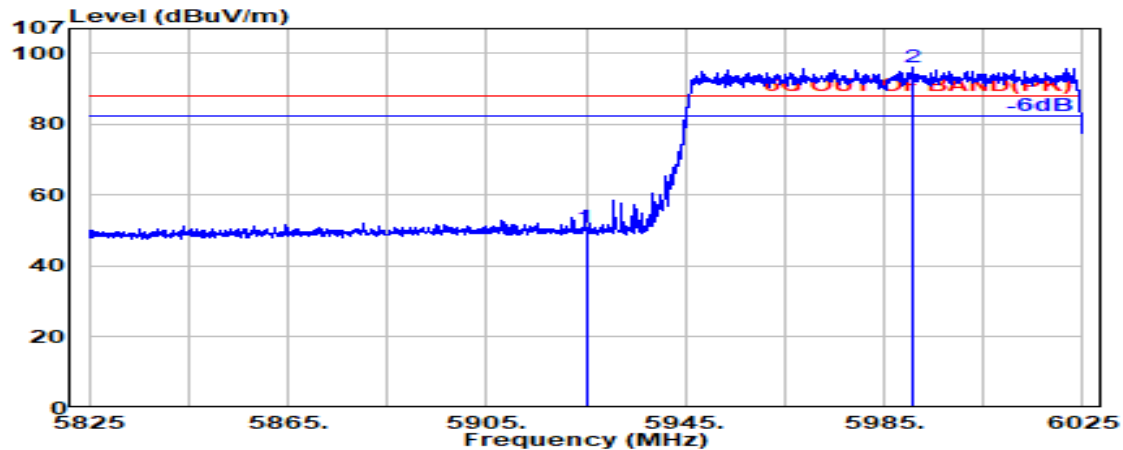

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.91             | 50.74                   | 88.20           | 37.46       | Peak     |
| @ 5990.600               | 34.22                 | 9.03            | 34.40            | 87.37             | 96.22                   | ---             | ---         | Peak     |

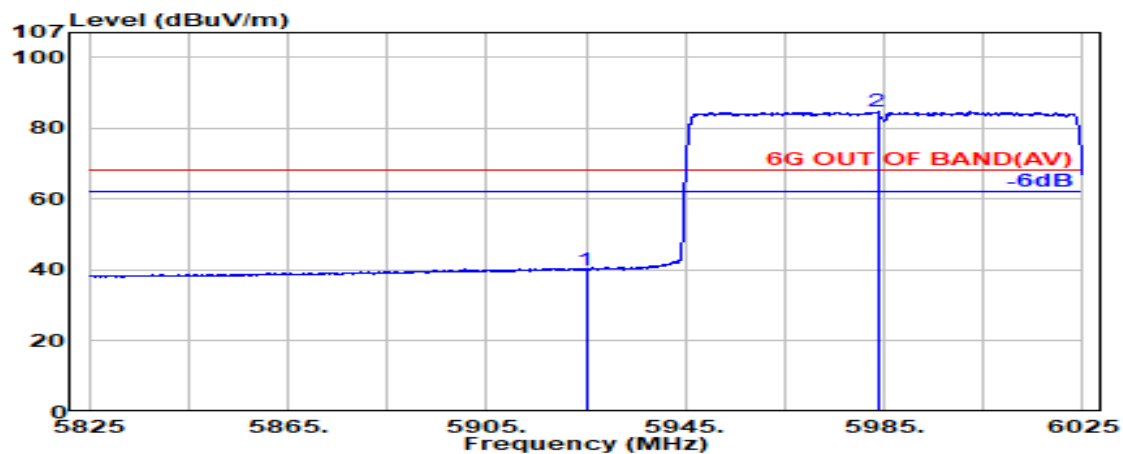

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 31.28             | 40.10                   | 68.20           | 28.10       | Average  |
| @ 5983.700               | 34.23                 | 9.02            | 34.39            | 75.84             | 84.70                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | S67        |
| Mode  | 802.11ax-HE160 | U-NII Band | 8          |
|       |                | Frequency  | TX 6985MHz |

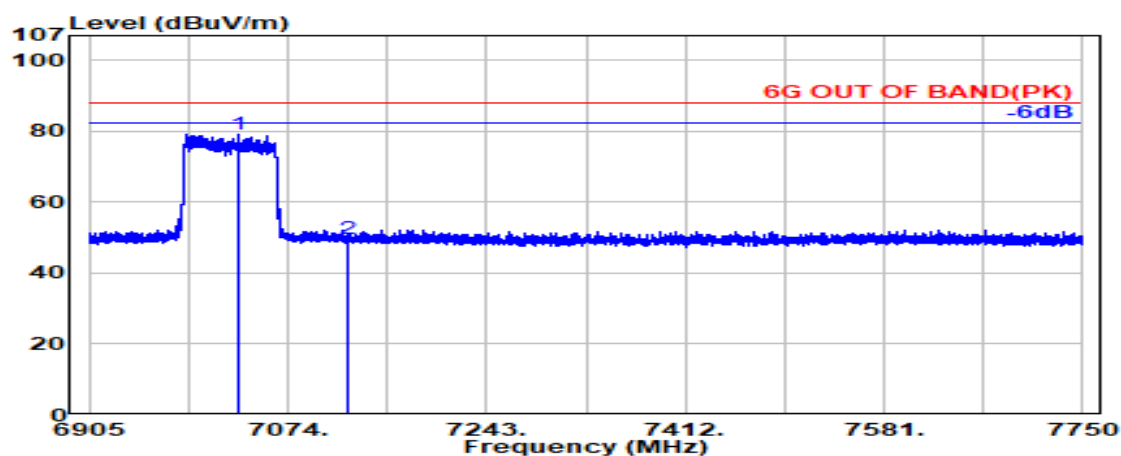

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7032.500               | 35.57                 | 9.74            | 34.42                  | 68.33             | 79.22                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.62             | 49.83                   | 88.20           | 38.37       | Peak     |

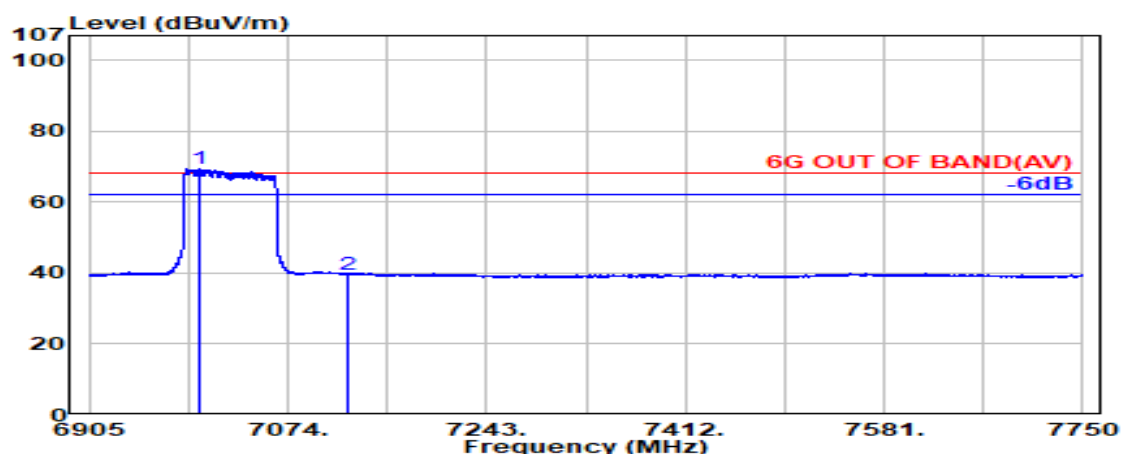

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6999.100               | 35.50                 | 9.72            | 34.40                  | 58.63             | 69.45                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.55             | 39.76                   | 68.20           | 28.44       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | S67        |
| Mode  | 802.11ax-HE160 | U-NII Band | 8          |
|       |                | Frequency  | TX 6985MHz |

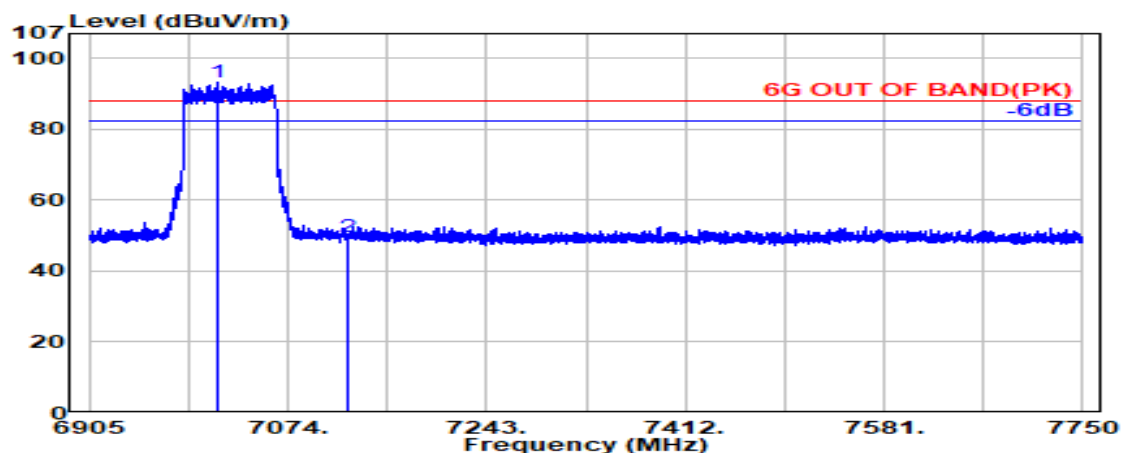

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7013.400               | 35.53                 | 9.73            | 34.41                  | 82.28             | 93.13                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.56             | 49.77                   | 88.20           | 38.43       | Peak     |

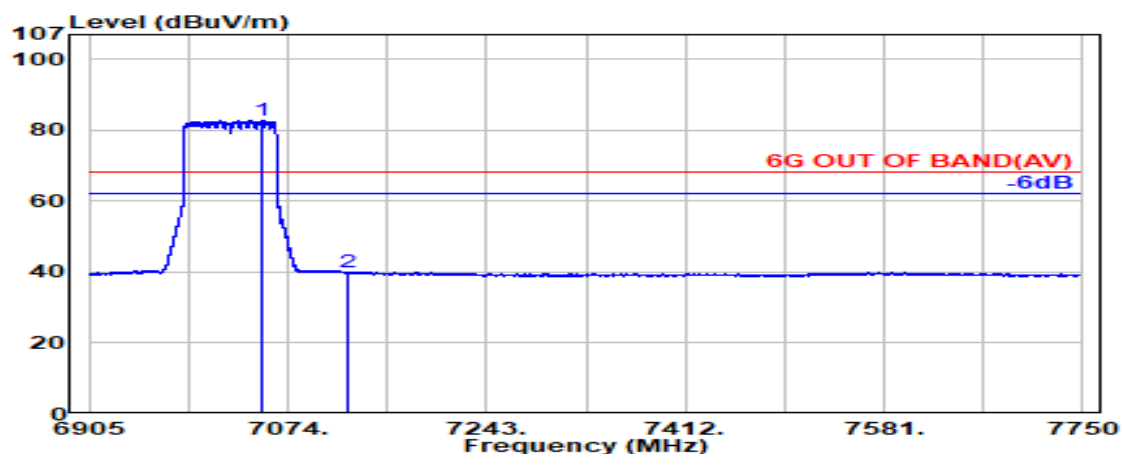

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7052.500               | 35.61                 | 9.75            | 34.44                  | 71.70             | 82.63                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.65             | 39.86                   | 68.20           | 28.34       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | 0          |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

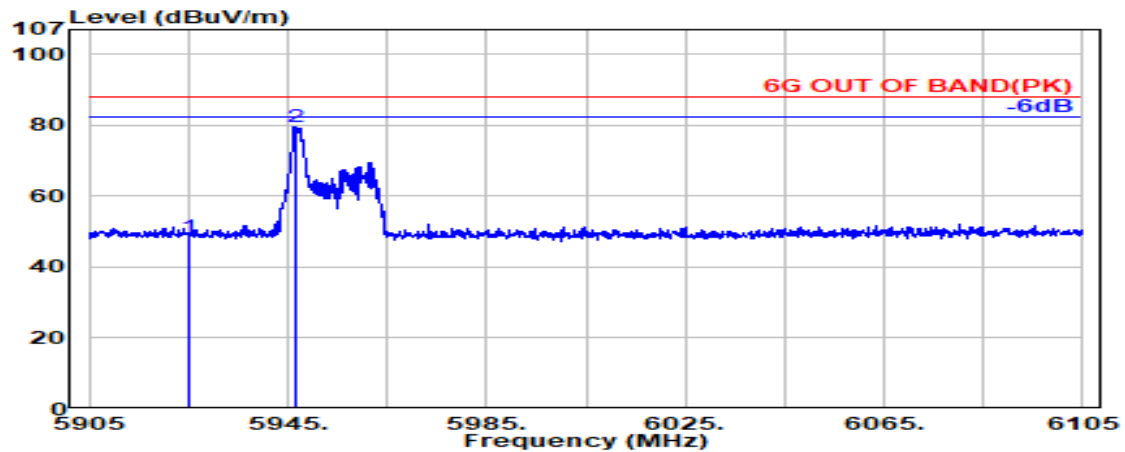

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 39.59             | 48.42                   | 88.20           | 39.78       | Peak     |
| @ 5946.400               | 34.29                 | 9.00            | 34.38                  | 70.49             | 79.40                   | ---             | ---         | Peak     |

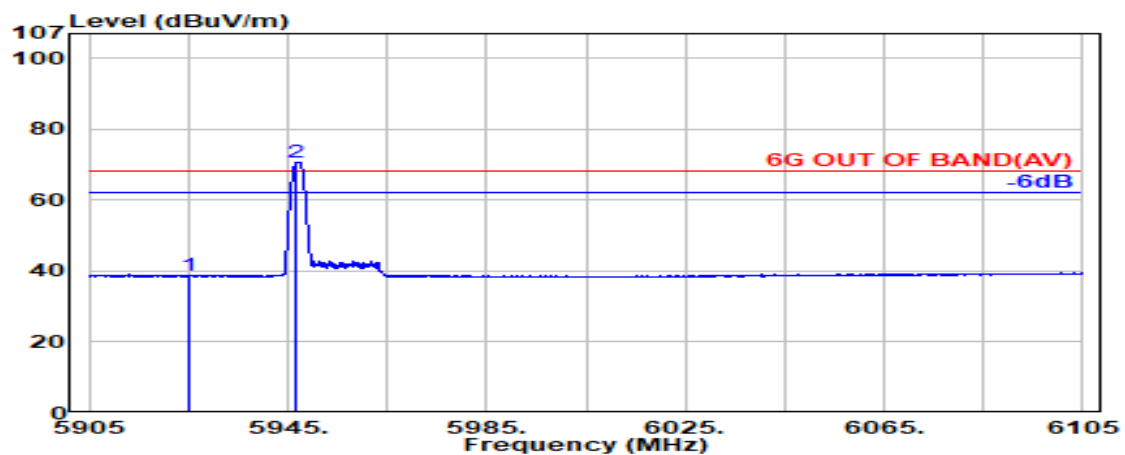

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 29.76             | 38.59                   | 68.20           | 29.61       | Average  |
| @ 5946.700               | 34.29                 | 9.00            | 34.38                  | 61.92             | 70.83                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | 0          |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

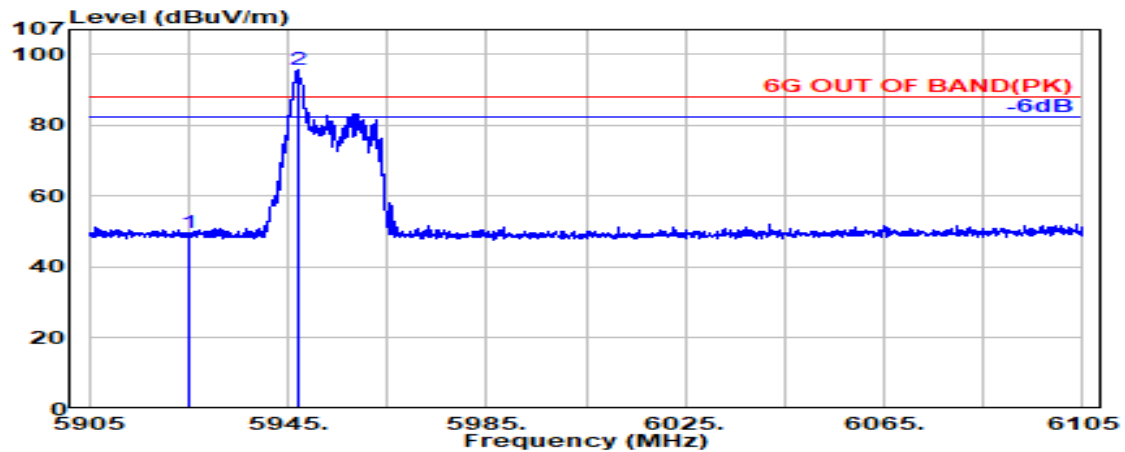

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.83             | 49.65                   | 88.20           | 38.55       | Peak     |
| @ 5946.900               | 34.29                 | 9.00            | 34.38                  | 86.82             | 95.73                   | ---             | ---         | Peak     |

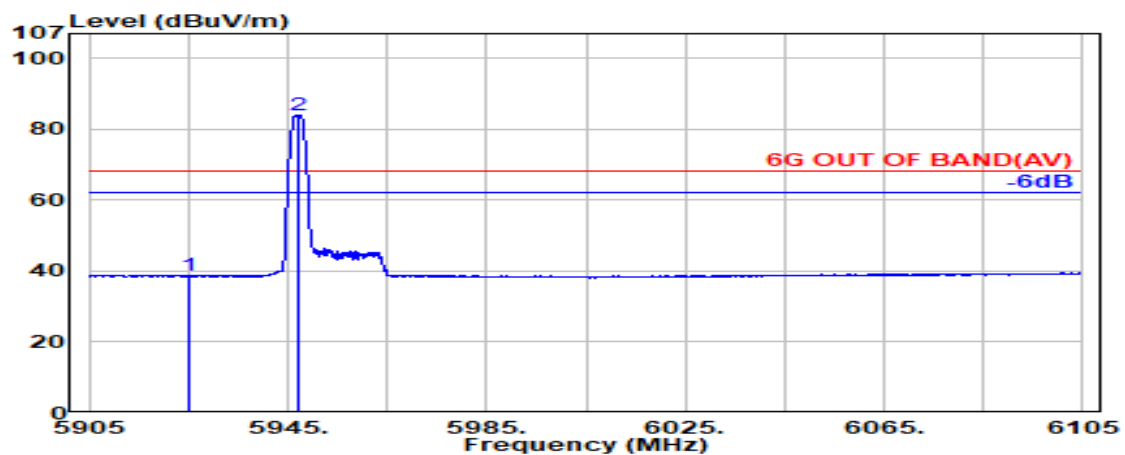

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 29.90             | 38.72                   | 68.20           | 29.48       | Average  |
| @ 5947.300               | 34.29                 | 9.00            | 34.38                  | 75.25             | 84.16                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | W36        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

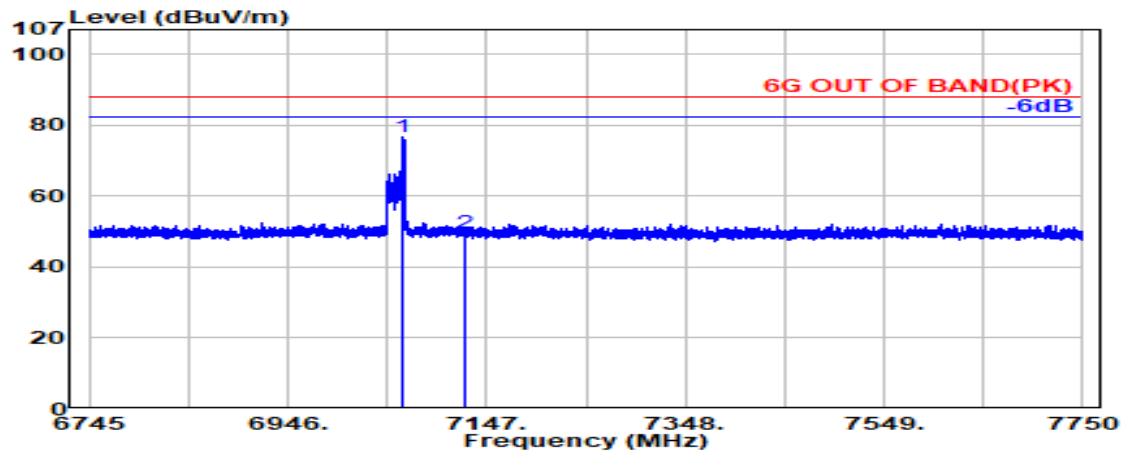

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7063.032                 | 35.65                 | 9.76            | 34.45            | 65.57             | 76.54                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49            | 38.27             | 49.48                   | 88.20           | 38.72       | Peak     |

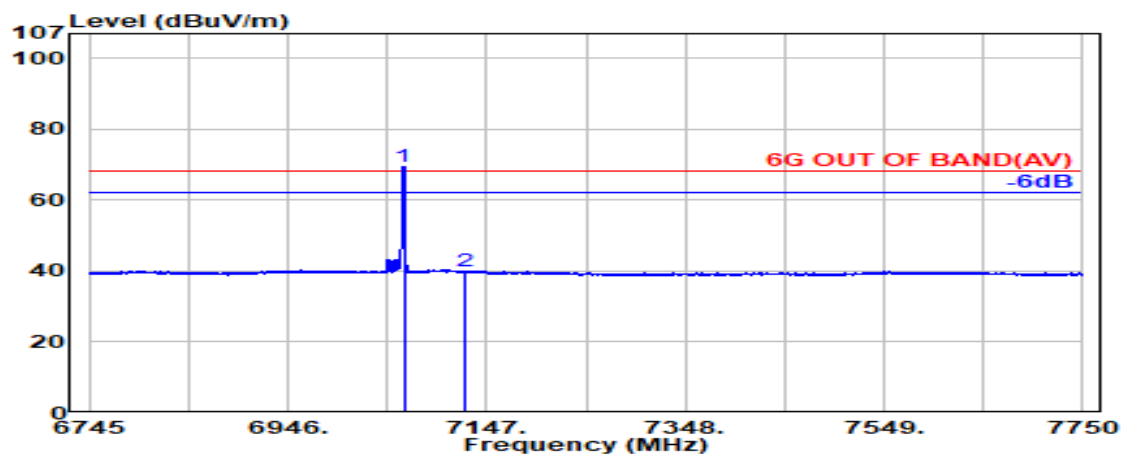

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7063.270                 | 35.65                 | 9.76            | 34.45            | 58.31             | 69.28                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49            | 28.66             | 39.87                   | 68.20           | 28.33       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | W36        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

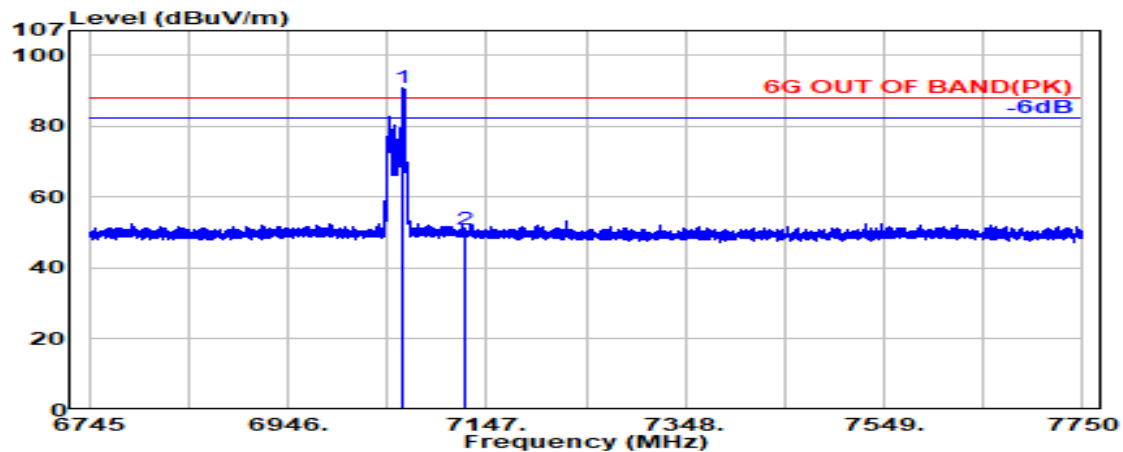

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.438                 | 35.65                 | 9.76            | 34.45                  | 79.83             | 90.80                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 39.51             | 50.72                   | 88.20           | 37.48       | Peak     |

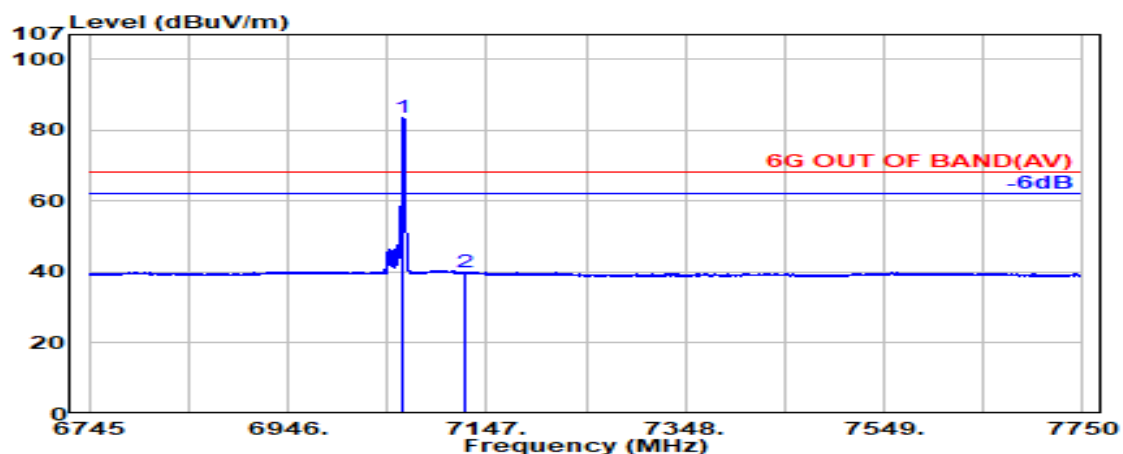


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7063.151                 | 35.65                 | 9.76            | 34.45                  | 72.41             | 83.38                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 28.61             | 39.82                   | 68.20           | 28.38       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | 37         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

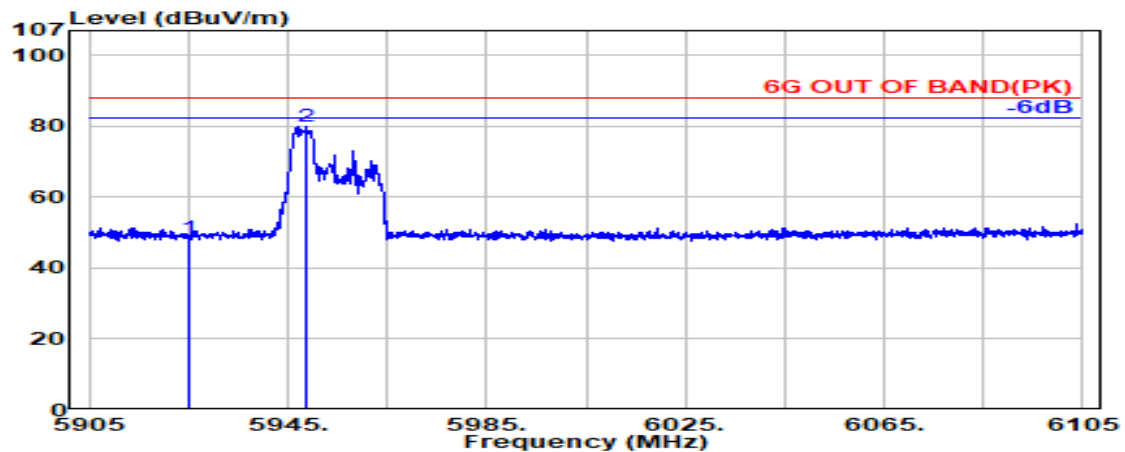

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 39.77             | 48.59                   | 88.20           | 39.61       | Peak     |
| @ 5948.700               | 34.29                 | 9.00            | 34.38            | 71.07             | 79.99                   | ---             | ---         | Peak     |

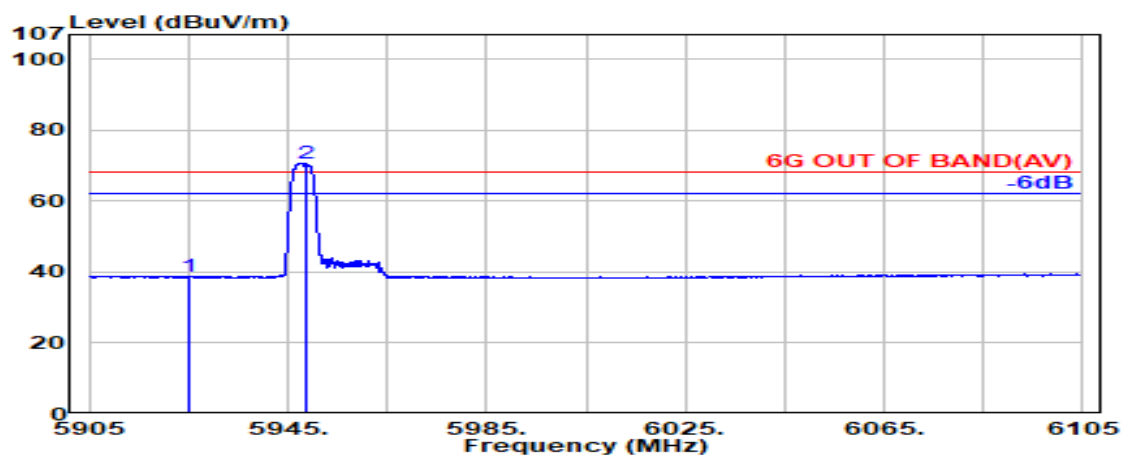

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.74             | 38.56                   | 68.20           | 29.64       | Average  |
| @ 5948.800               | 34.30                 | 9.00            | 34.38            | 61.88             | 70.80                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | 37         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

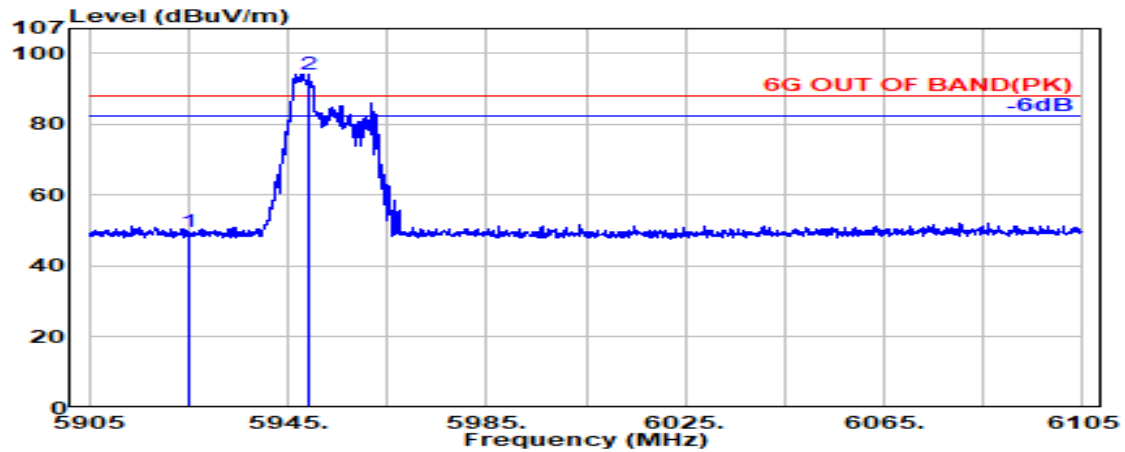

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.74             | 49.57                   | 88.20           | 38.63       | Peak     |
| @ 5949.000               | 34.30                 | 9.00            | 34.38            | 85.28             | 94.20                   | ---             | ---         | Peak     |

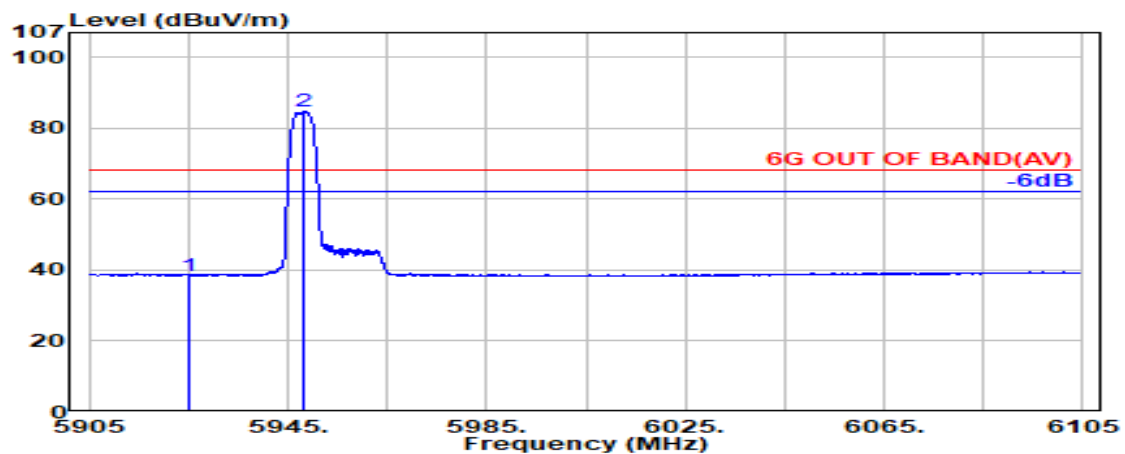

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 29.65             | 38.47                   | 68.20           | 29.73       | Average  |
| @ 5948.100               | 34.29                 | 9.00            | 34.38            | 75.76             | 84.68                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | W52        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

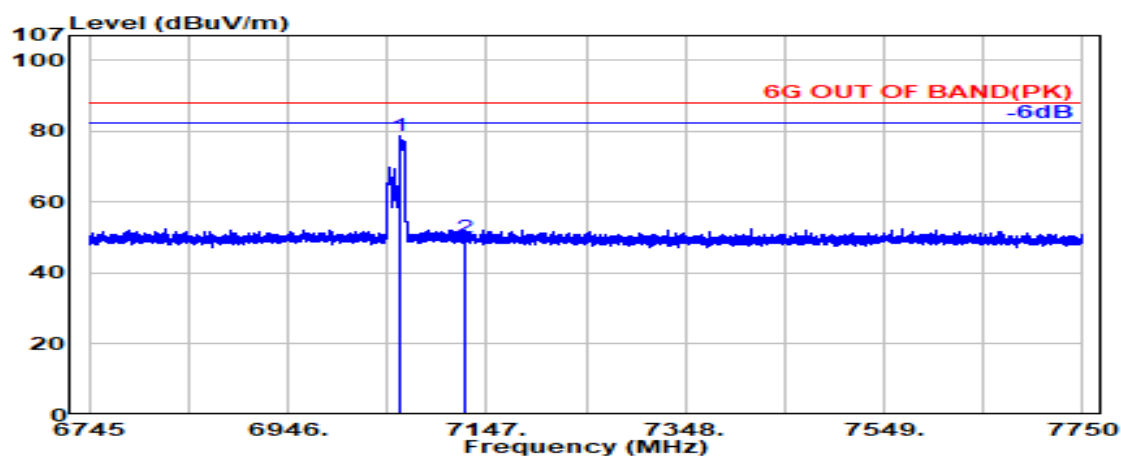

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7060.416               | 35.64                 | 9.76            | 34.44            | 67.87             | 78.83                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.03             | 50.24                   | 88.20           | 37.96       | Peak     |

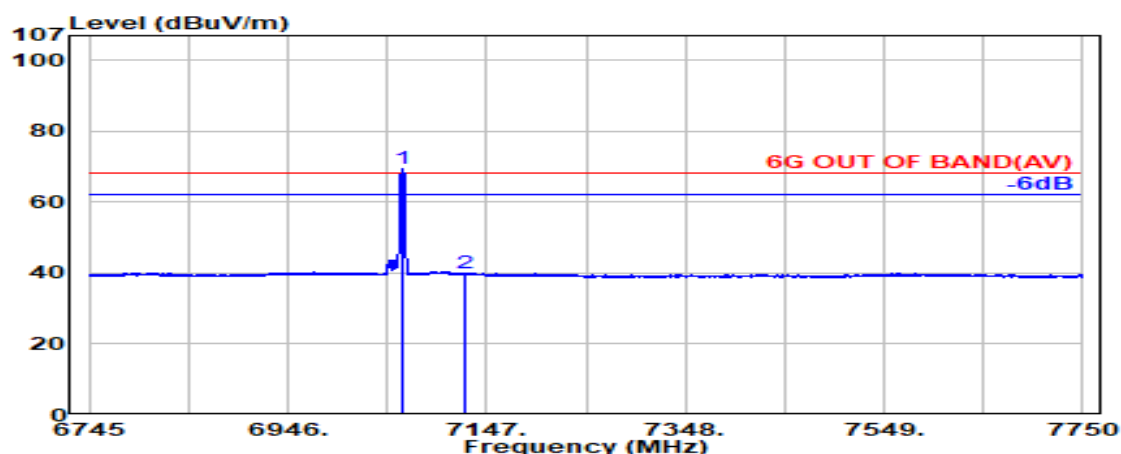

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.843               | 35.65                 | 9.76            | 34.44            | 58.29             | 69.26                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.72             | 39.93                   | 68.20           | 28.27       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | W52        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

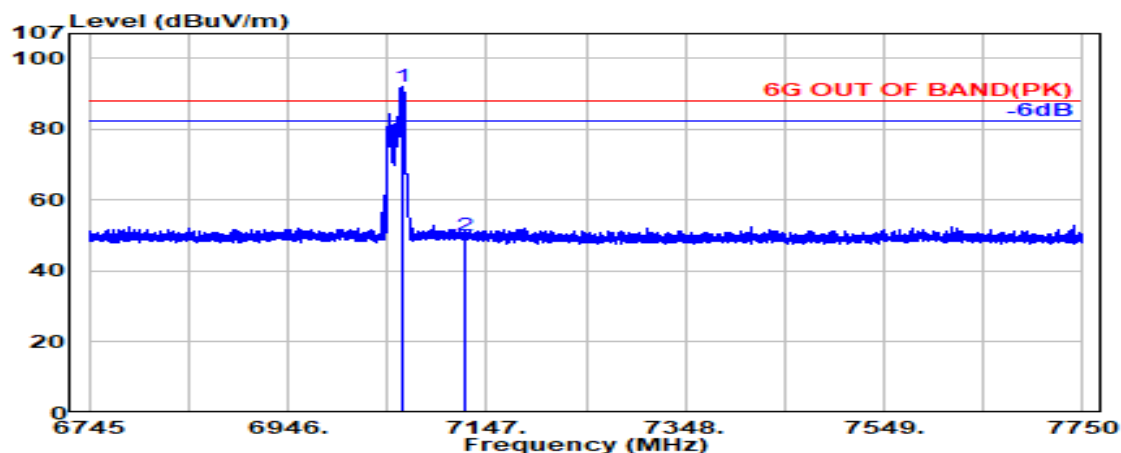

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.367               | 35.65                 | 9.76            | 34.44                  | 81.05             | 92.01                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.77             | 49.98                   | 88.20           | 38.22       | Peak     |

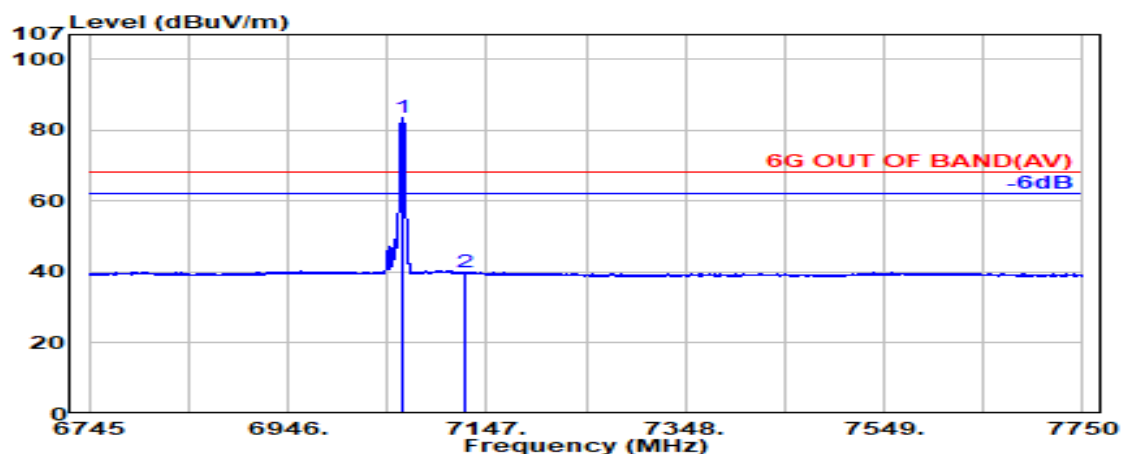

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.961               | 35.65                 | 9.76            | 34.44                  | 72.46             | 83.42                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.69             | 39.90                   | 68.20           | 28.30       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 53         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

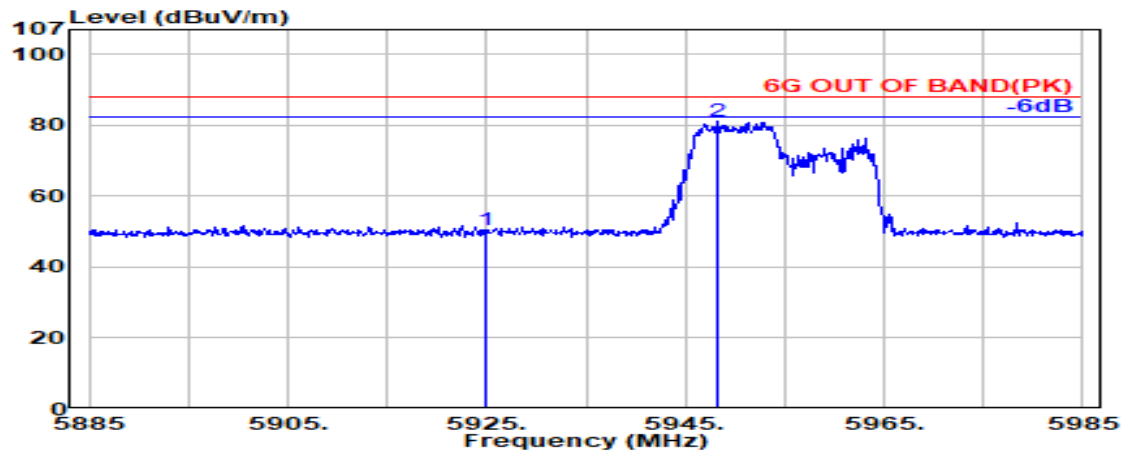

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.67             | 50.49                   | 88.20           | 37.71       | Peak     |
| @ 5948.200               | 34.29                 | 9.00            | 34.38                  | 72.09             | 81.01                   | ---             | ---         | Peak     |

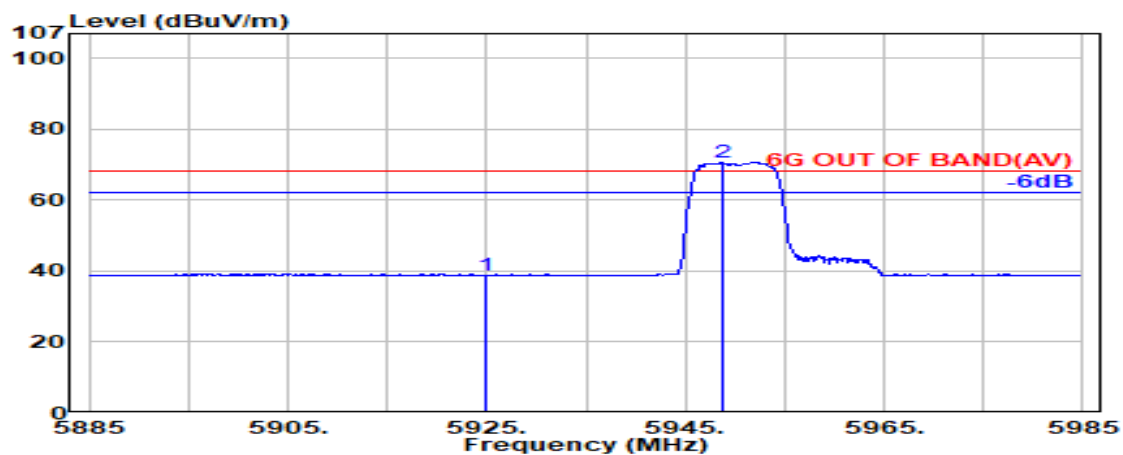

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.13             | 38.95                   | 68.20           | 29.25       | Average  |
| @ 5948.700               | 34.29                 | 9.00            | 34.38                  | 61.71             | 70.63                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 53         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

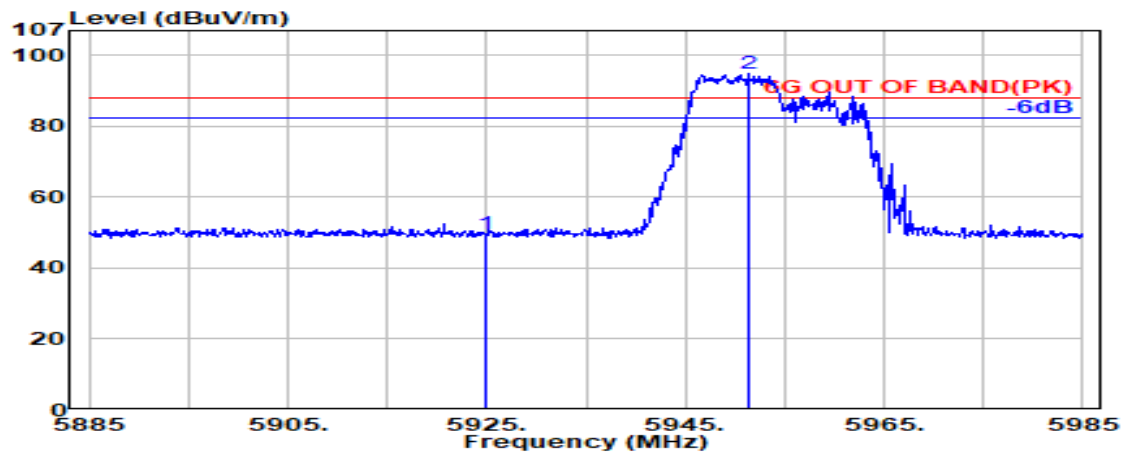

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.98             | 49.80                   | 88.20           | 38.40       | Peak     |
| @ 5951.400               | 34.30                 | 9.00            | 34.38            | 85.87             | 94.79                   | ---             | ---         | Peak     |

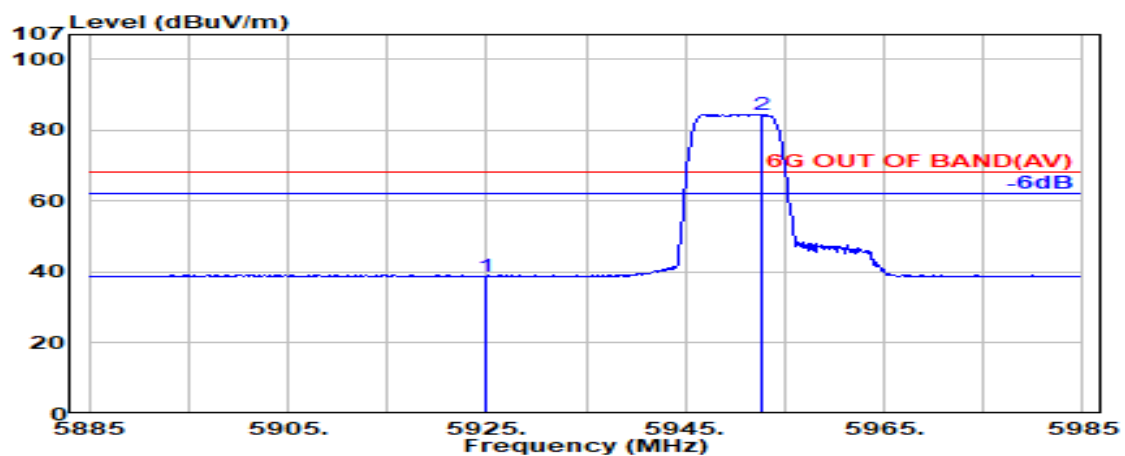


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.09             | 38.91                   | 68.20           | 29.29       | Average  |
| @ 5952.600               | 34.29                 | 9.00            | 34.38            | 75.62             | 84.54                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 60         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

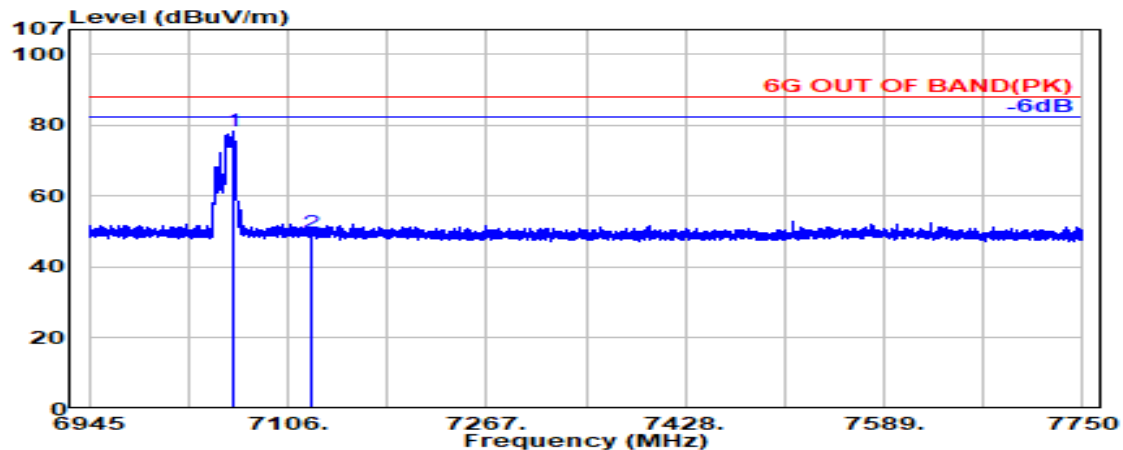

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.600               | 35.65                 | 9.76            | 34.45            | 67.22             | 78.19                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.56             | 49.77                   | 88.20           | 38.43       | Peak     |

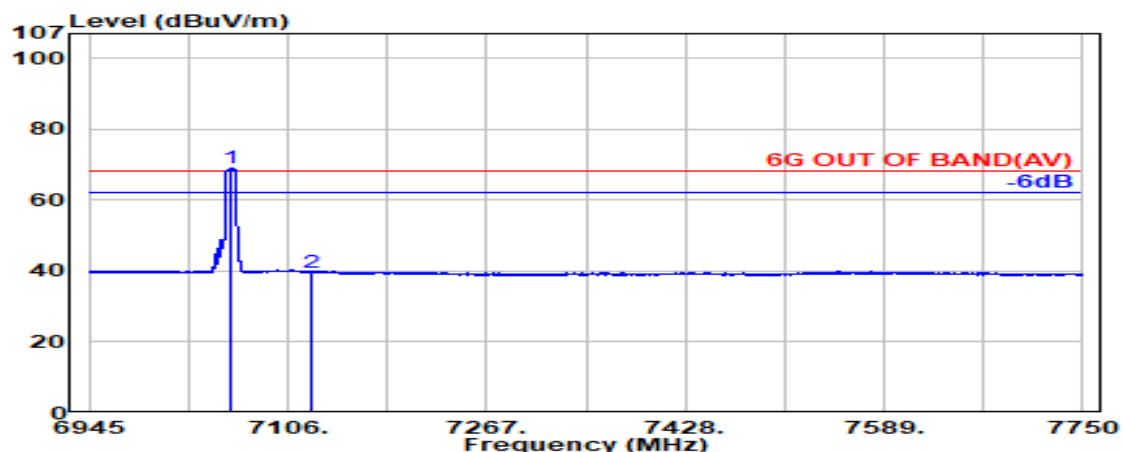

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7060.400               | 35.64                 | 9.76            | 34.44            | 58.05             | 69.01                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.50             | 39.72                   | 68.20           | 28.48       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 60         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

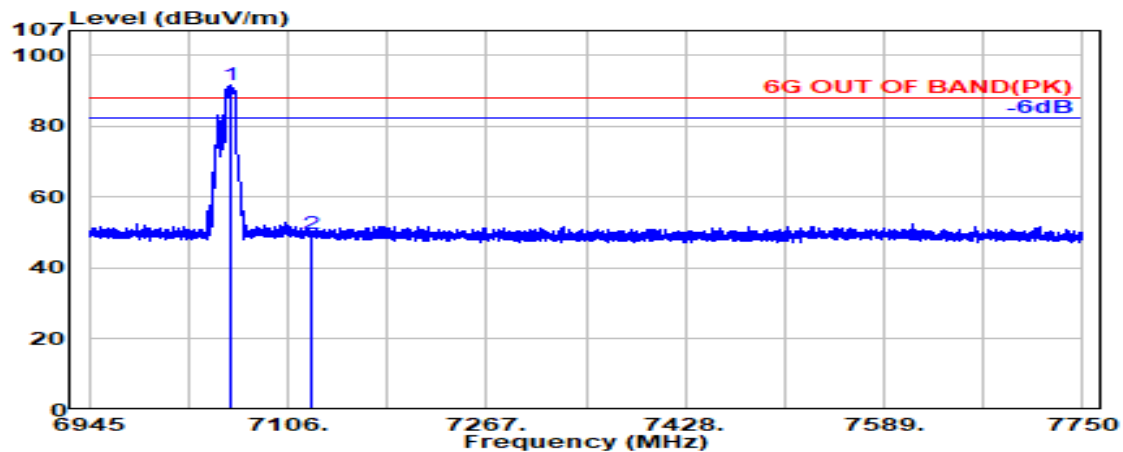

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7059.700               | 35.64                 | 9.76            | 34.44                  | 80.78             | 91.73                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.47             | 49.68                   | 88.20           | 38.52       | Peak     |

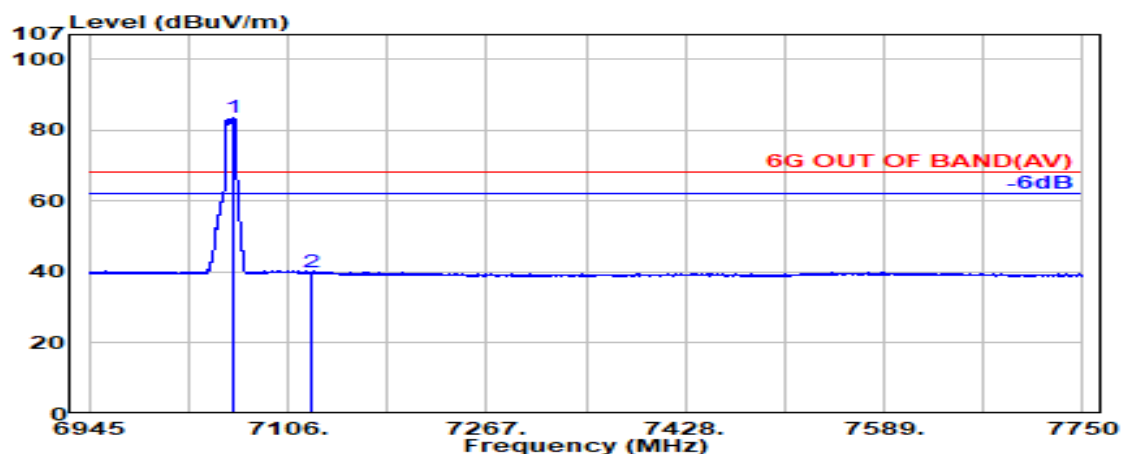

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.200               | 35.64                 | 9.76            | 34.44                  | 72.46             | 83.42                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.64             | 39.86                   | 68.20           | 28.34       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 242T            | RU Index   | 61         |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

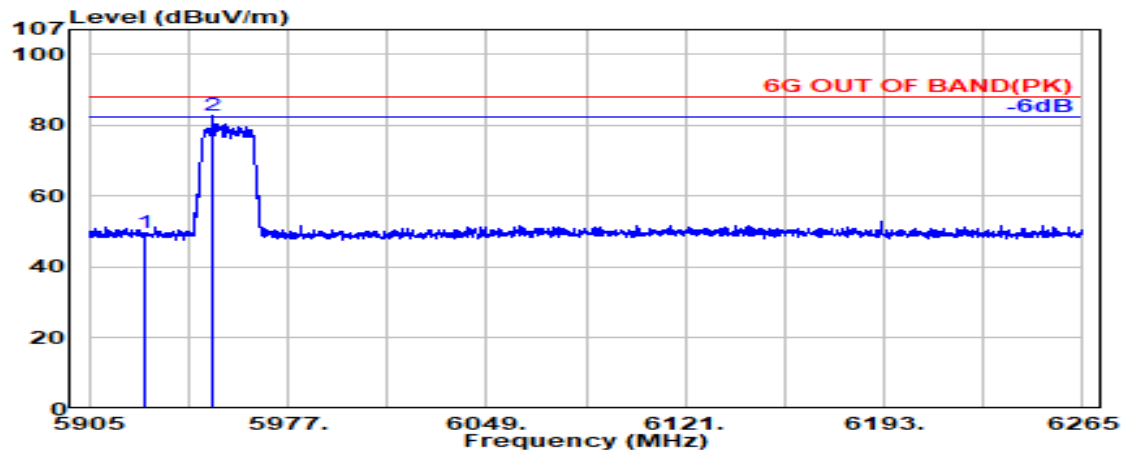

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.99             | 49.82                   | 88.20           | 38.38       | Peak     |
| @ 5950.000               | 34.30                 | 9.00            | 34.38                  | 73.85             | 82.77                   | ---             | ---         | Peak     |

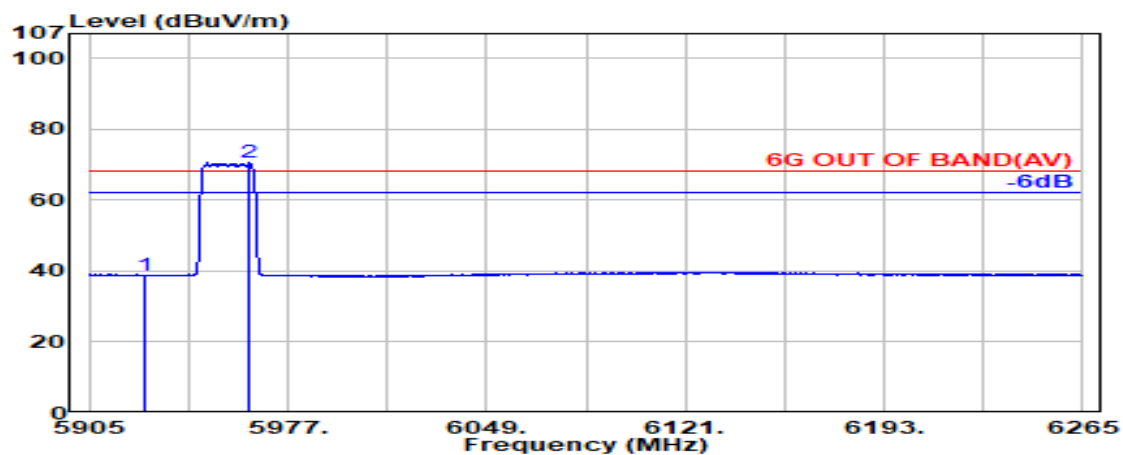

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.12             | 38.94                   | 68.20           | 29.26       | Average  |
| @ 5963.320               | 34.27                 | 9.01            | 34.38                  | 61.82             | 70.72                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 242T            | RU Index   | 61         |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

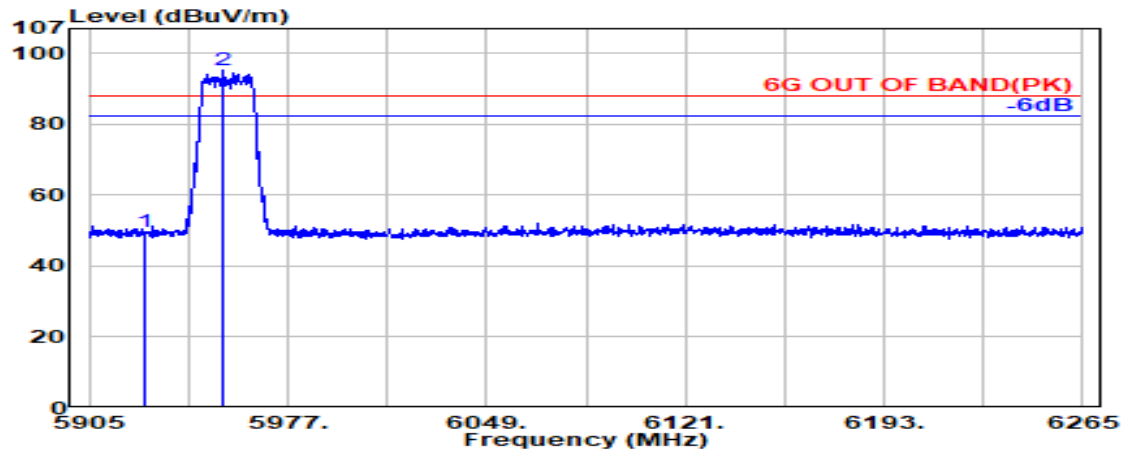

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.82             | 49.64                   | 88.20           | 38.56       | Peak     |
| @ 5953.780               | 34.29                 | 9.01            | 34.38                  | 86.30             | 95.22                   | ---             | ---         | Peak     |

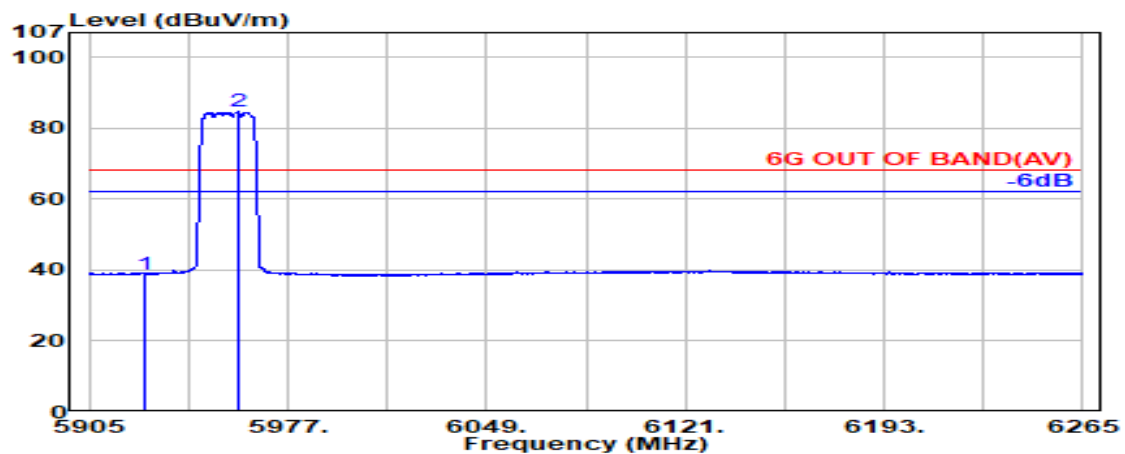

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.06             | 38.89                   | 68.20           | 29.31       | Average  |
| @ 5959.000               | 34.28                 | 9.01            | 34.38                  | 75.71             | 84.62                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 242T           | RU Index   | 64         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

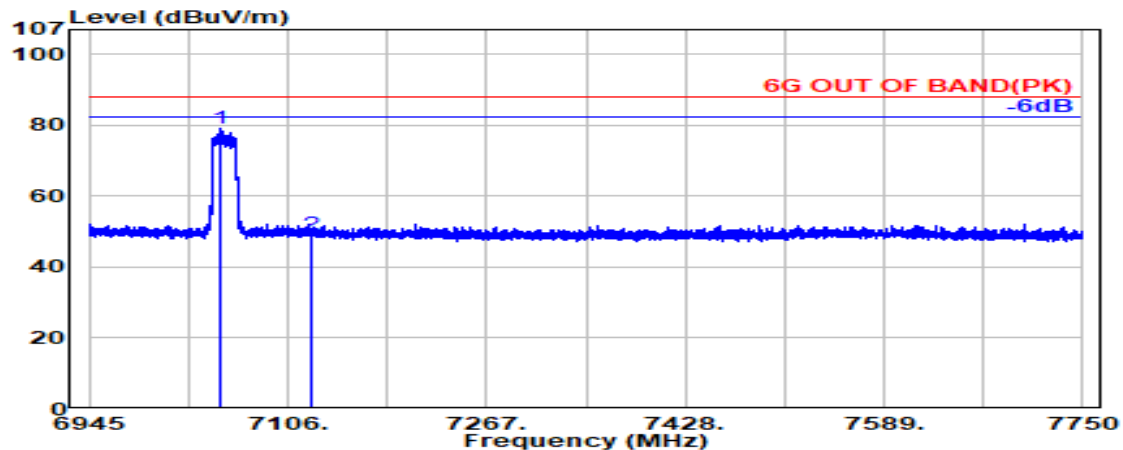

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7052.100               | 35.61                 | 9.75            | 34.44                  | 68.06             | 78.98                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 37.87             | 49.08                   | 88.20           | 39.12       | Peak     |

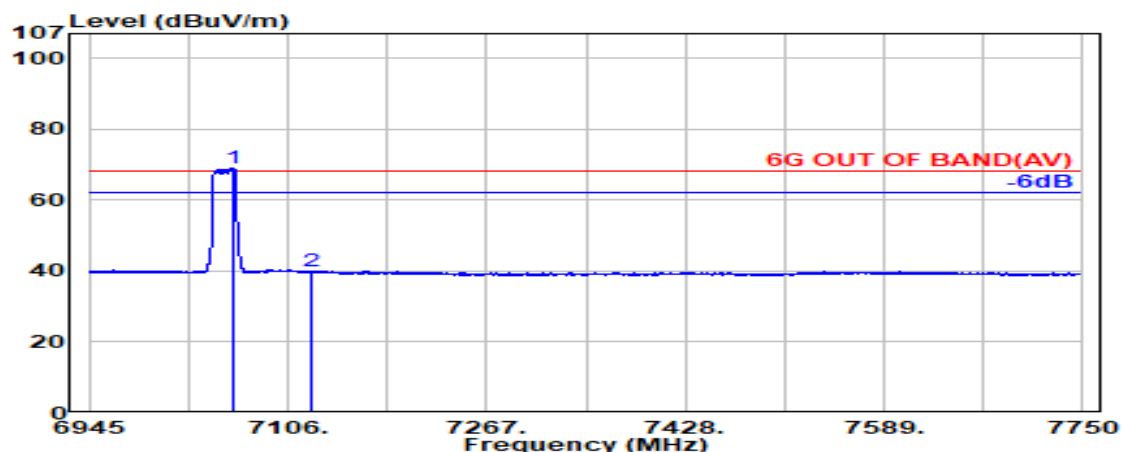

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.800               | 35.65                 | 9.76            | 34.45                  | 58.00             | 68.97                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.61             | 39.83                   | 68.20           | 28.37       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 242T           | RU Index   | 64         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

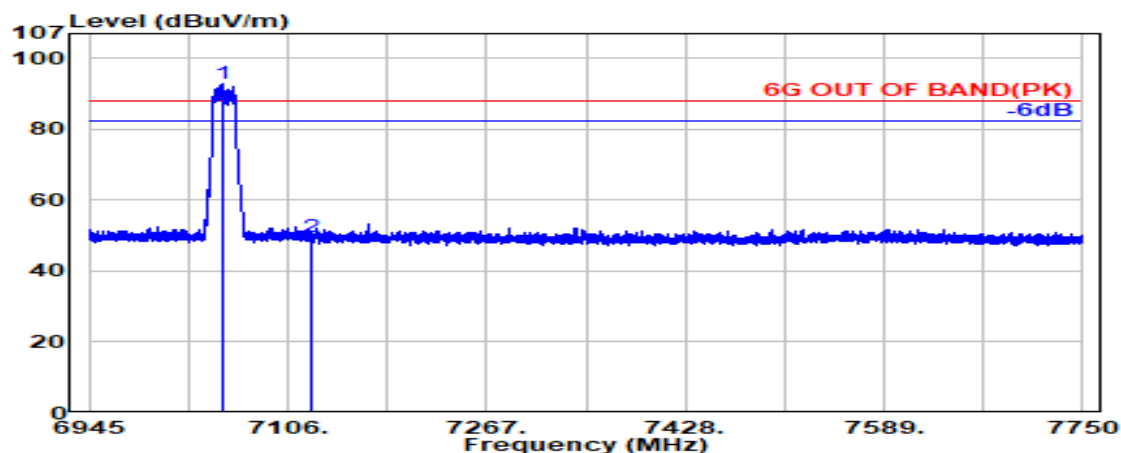

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7053.600               | 35.61                 | 9.75            | 34.44                  | 82.08             | 93.01                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.54             | 49.75                   | 88.20           | 38.45       | Peak     |

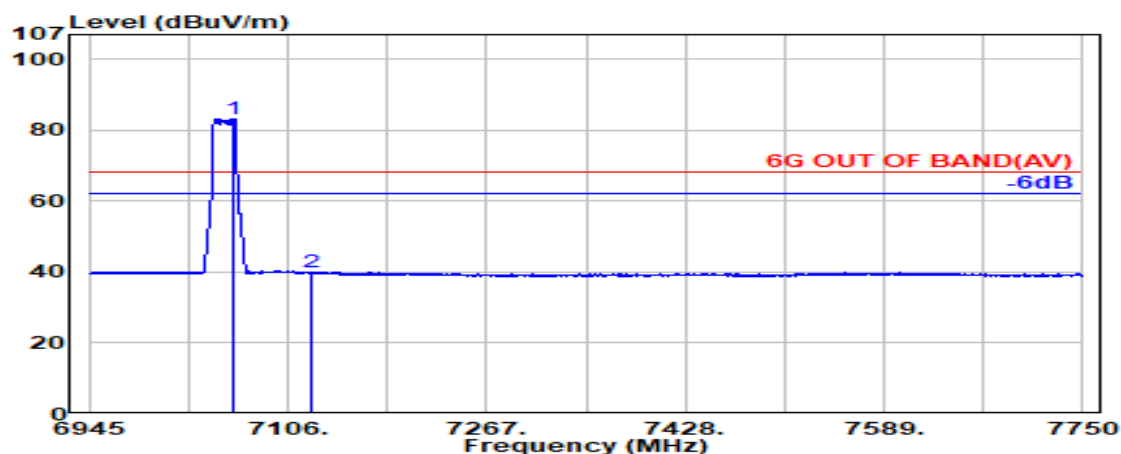

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.100               | 35.64                 | 9.76            | 34.44                  | 72.14             | 83.10                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.65             | 39.86                   | 68.20           | 28.34       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 65         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

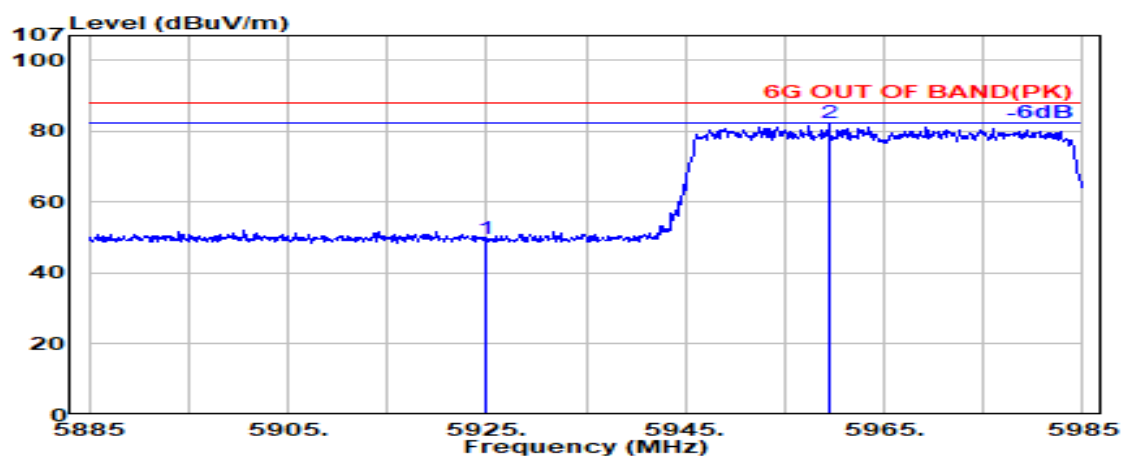

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.69             | 49.51                   | 88.20           | 38.69       | Peak     |
| @ 5959.400               | 34.28                 | 9.01            | 34.38                  | 73.29             | 82.20                   | ---             | ---         | Peak     |

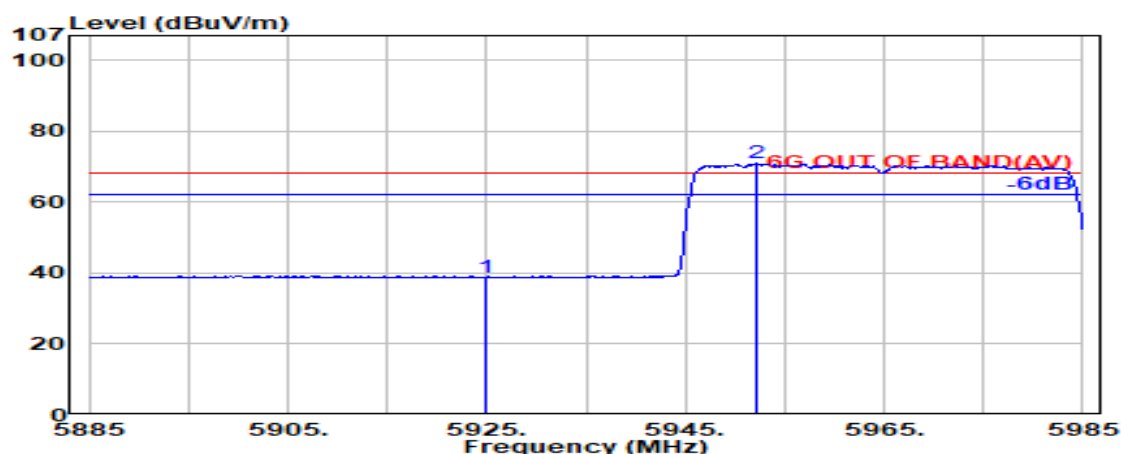

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.09             | 38.92                   | 68.20           | 29.28       | Average  |
| @ 5952.100               | 34.30                 | 9.00            | 34.38                  | 61.95             | 70.87                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 65         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

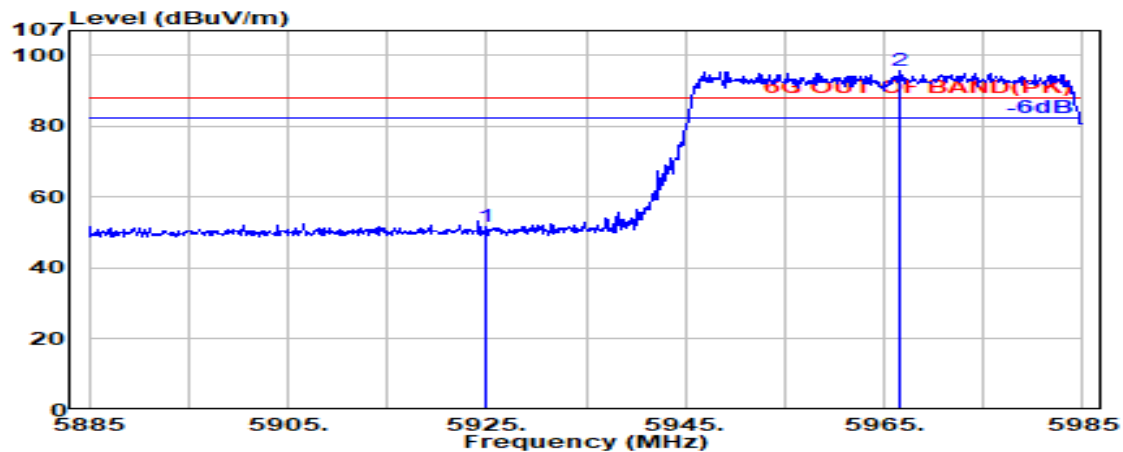

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.68             | 51.50                   | 88.20           | 36.70       | Peak     |
| @ 5966.500               | 34.27                 | 9.01            | 34.39                  | 86.96             | 95.85                   | ---             | ---         | Peak     |

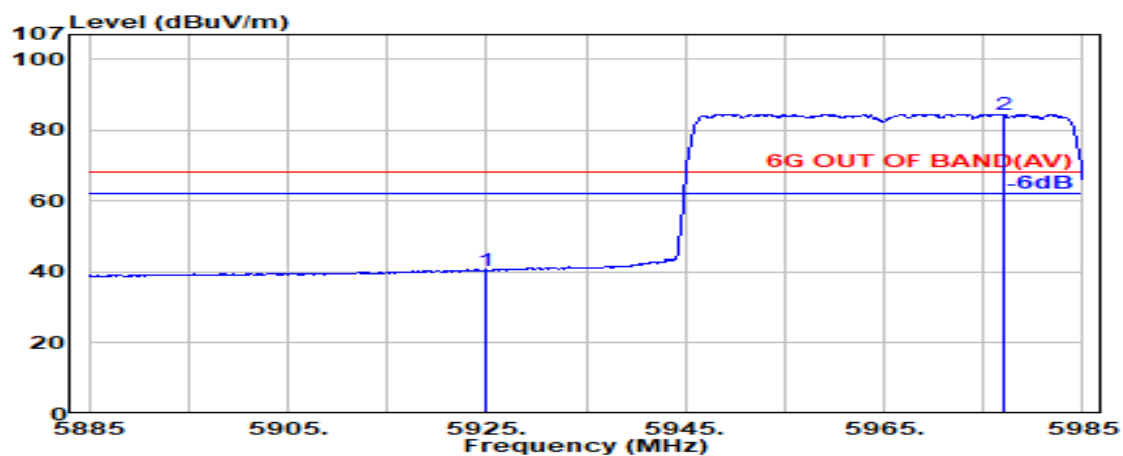

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 31.60             | 40.43                   | 68.20           | 27.77       | Average  |
| @ 5977.000               | 34.25                 | 9.02            | 34.39                  | 75.69             | 84.56                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 66         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

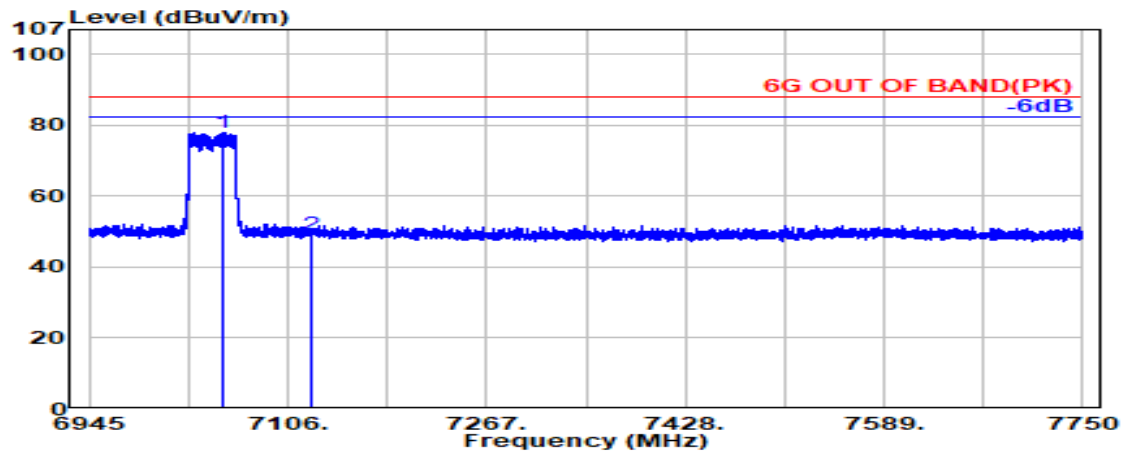

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7054.300               | 35.62                 | 9.76            | 34.44                  | 67.15             | 78.08                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 37.86             | 49.08                   | 88.20           | 39.12       | Peak     |

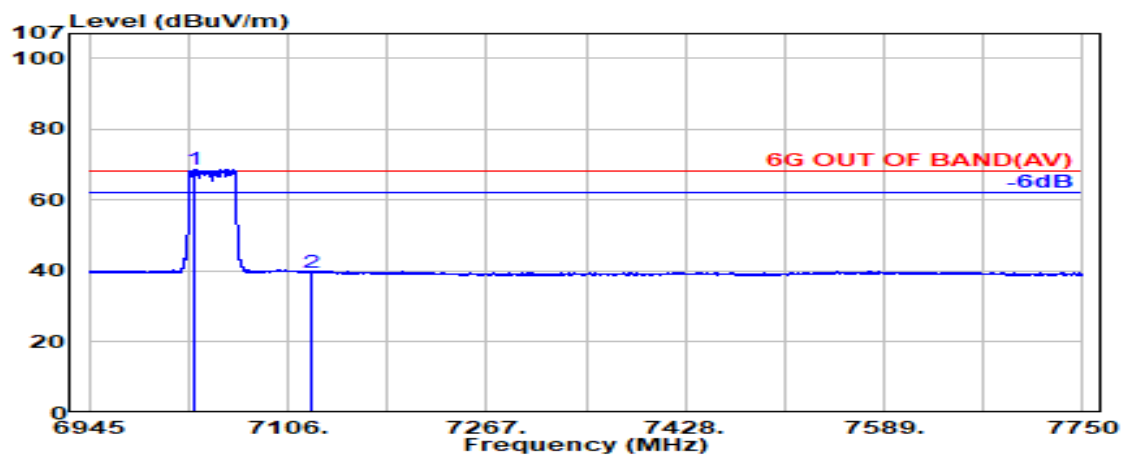

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7030.700               | 35.56                 | 9.74            | 34.42                  | 57.90             | 68.78                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.51             | 39.72                   | 68.20           | 28.48       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 66         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

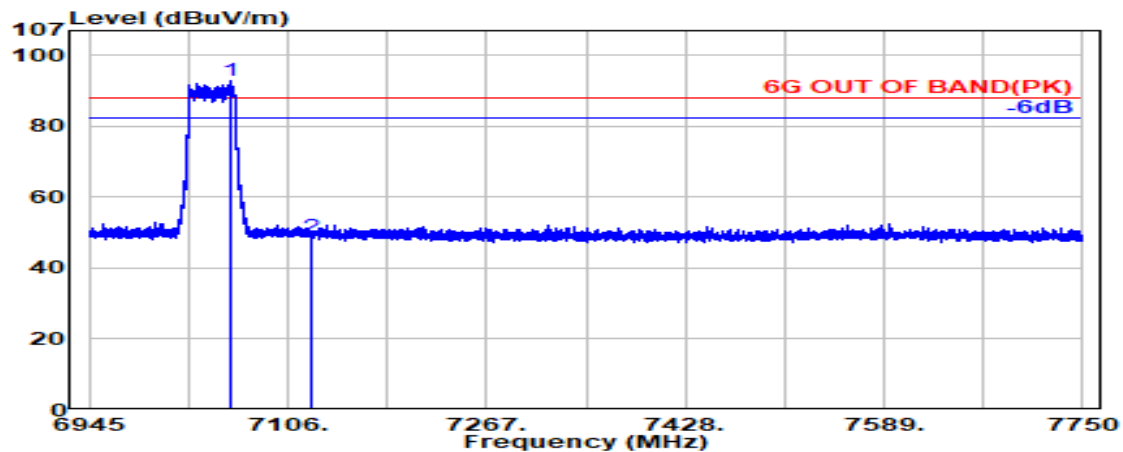

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7060.100               | 35.64                 | 9.76            | 34.44            | 81.78             | 92.74                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 37.72             | 48.93                   | 88.20           | 39.27       | Peak     |

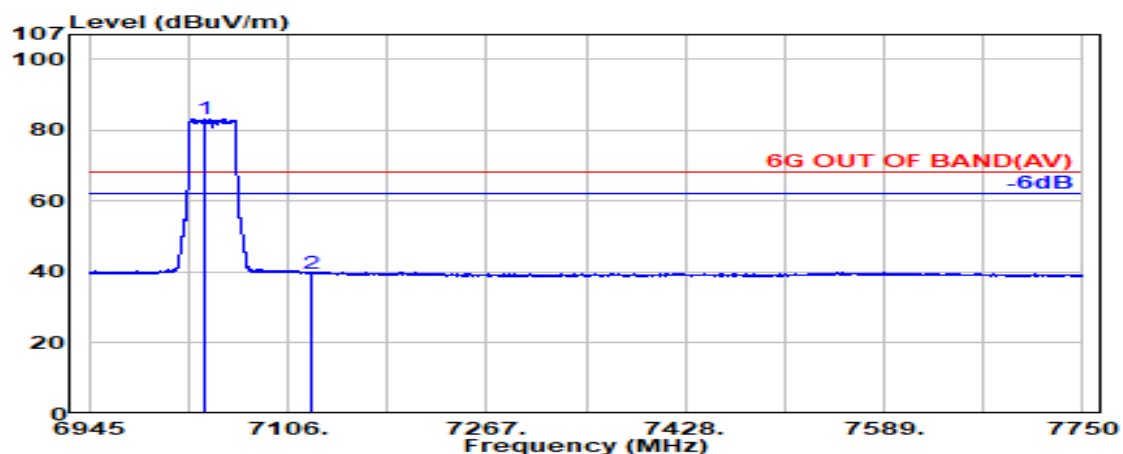

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7039.200               | 35.58                 | 9.75            | 34.43            | 72.33             | 83.23                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.46             | 39.67                   | 68.20           | 28.53       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

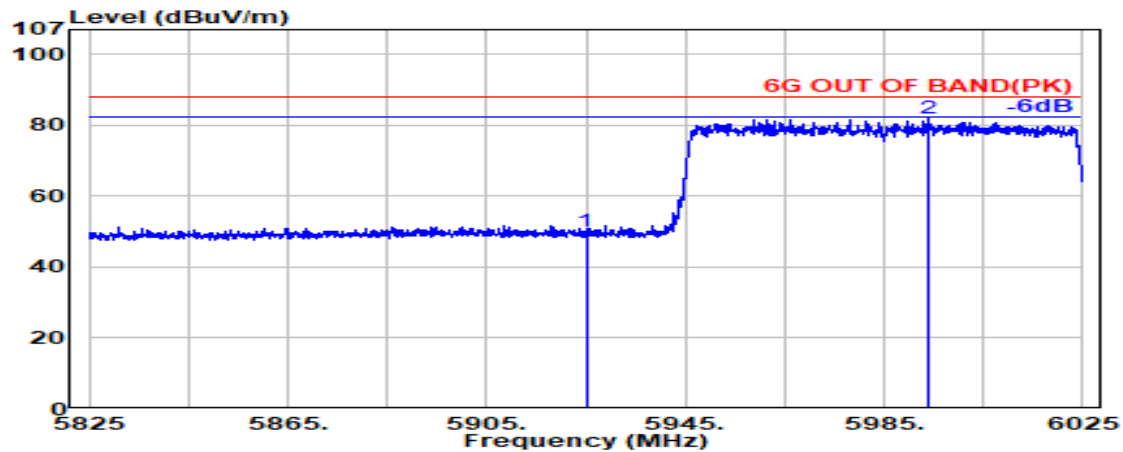

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.19             | 50.01                   | 88.20           | 38.19       | Peak     |
| @ 5993.700               | 34.21                 | 9.03            | 34.40            | 73.08             | 81.92                   | ---             | ---         | Peak     |

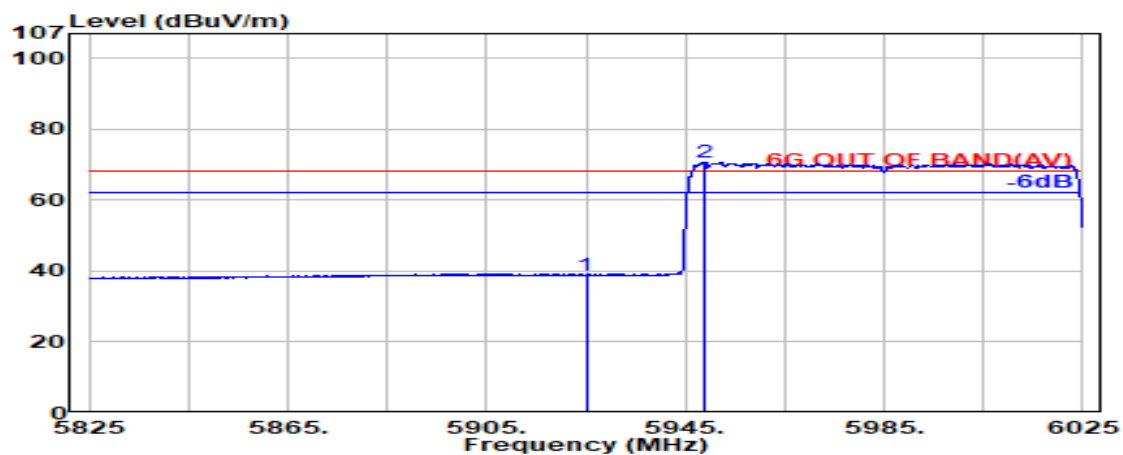

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.12             | 38.95                   | 68.20           | 29.25       | Average  |
| @ 5949.100               | 34.30                 | 9.00            | 34.38            | 61.73             | 70.66                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

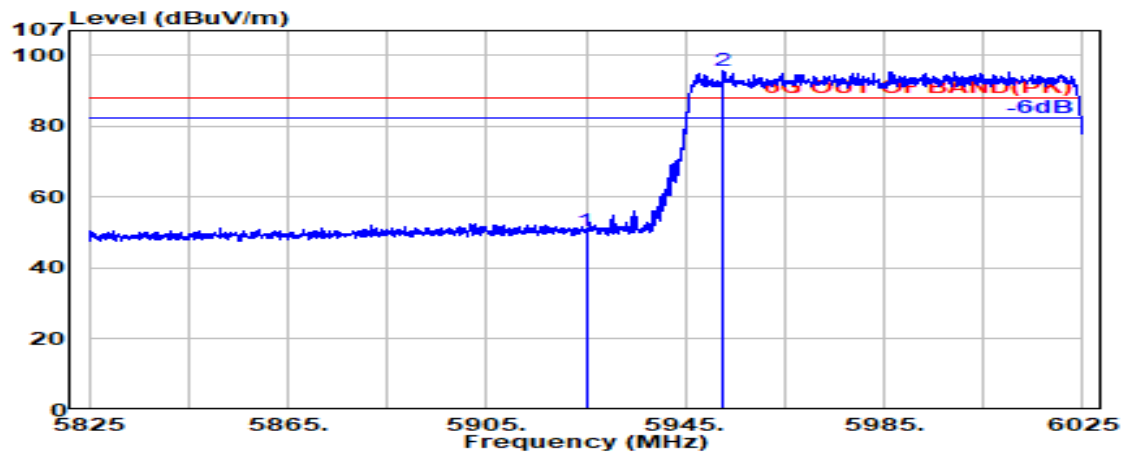

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.68             | 50.50                   | 88.20           | 37.70       | Peak     |
| @ 5952.700               | 34.29                 | 9.00            | 34.38            | 86.59             | 95.51                   | ---             | ---         | Peak     |

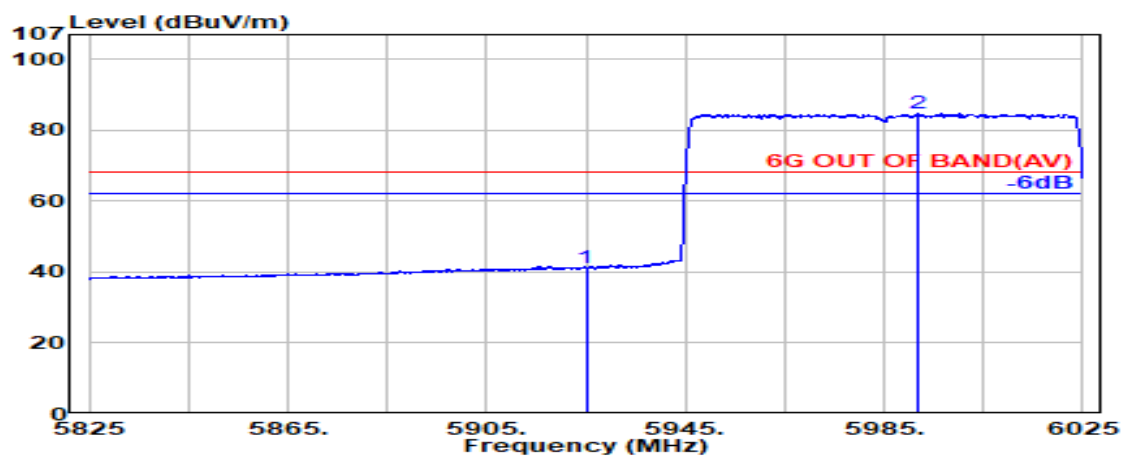

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 32.38             | 41.20                   | 68.20           | 27.00       | Average  |
| @ 5991.700               | 34.22                 | 9.03            | 34.40            | 75.78             | 84.63                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

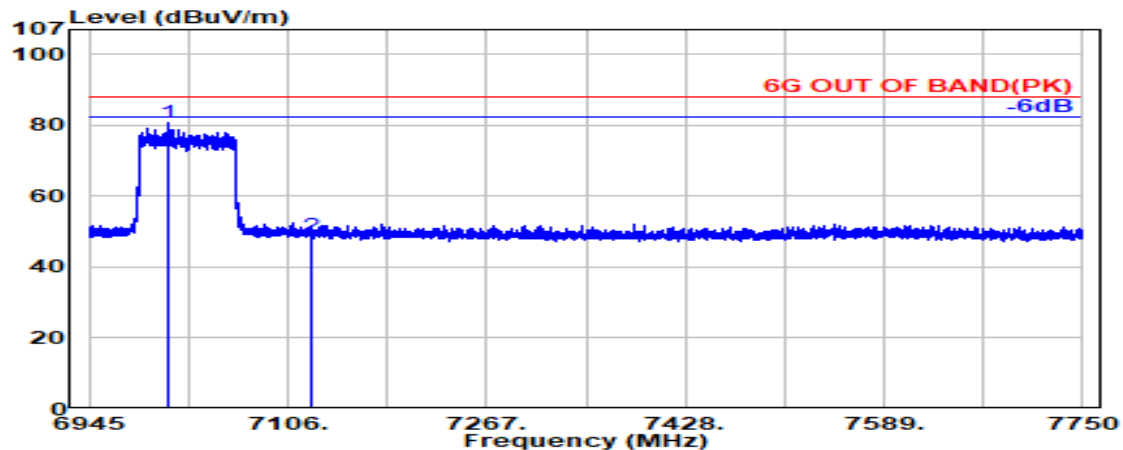

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7009.900               | 35.52                 | 9.73            | 34.41            | 69.90             | 80.74                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 37.57             | 48.78                   | 88.20           | 39.42       | Peak     |

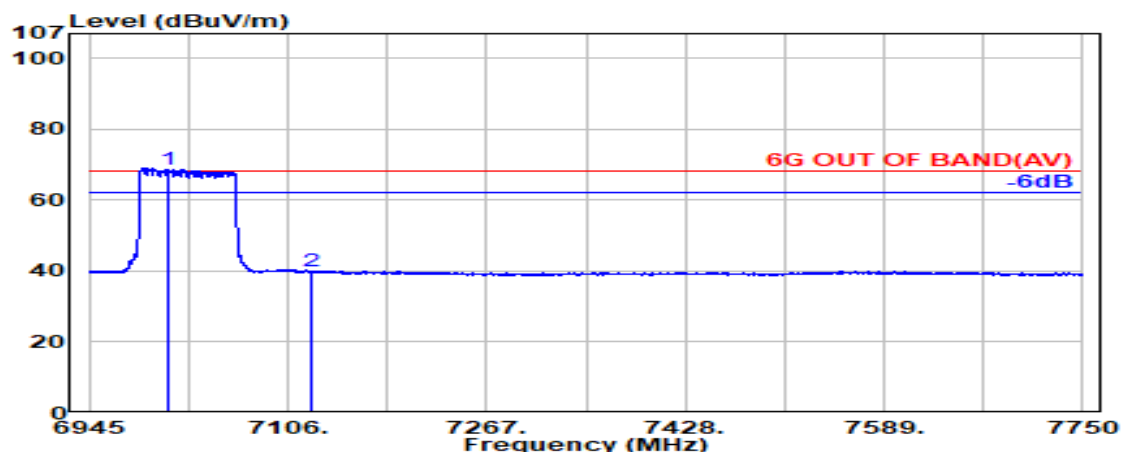

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.300               | 35.52                 | 9.73            | 34.41            | 57.90             | 68.74                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.79             | 40.00                   | 68.20           | 28.20       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

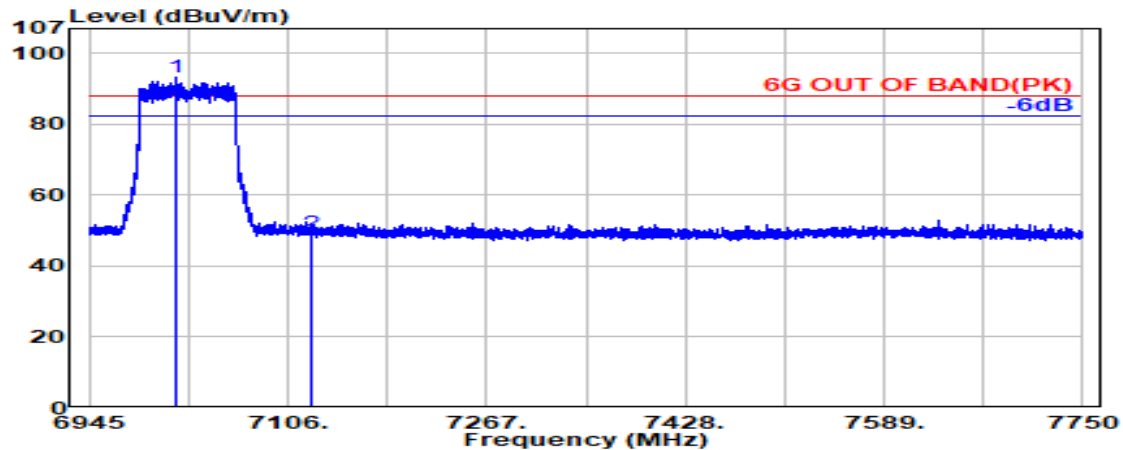

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7015.700               | 35.53                 | 9.73            | 34.41            | 82.36             | 93.21                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.21             | 49.42                   | 88.20           | 38.78       | Peak     |

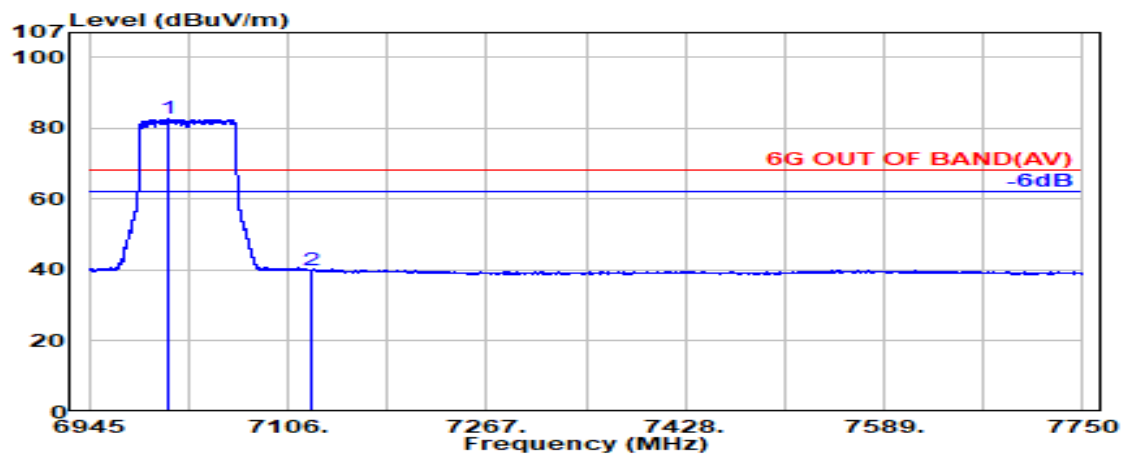

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.300               | 35.52                 | 9.73            | 34.41            | 71.76             | 82.60                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.77             | 39.99                   | 68.20           | 28.21       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | S68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

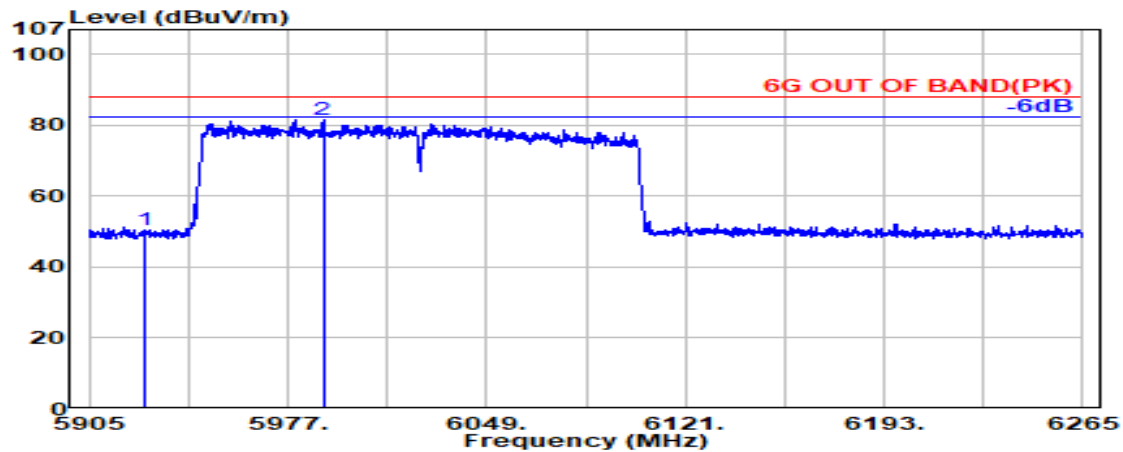

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.50             | 50.32                   | 88.20           | 37.88       | Peak     |
| @ 5989.780               | 34.22                 | 9.02            | 34.40            | 72.89             | 81.74                   | ---             | ---         | Peak     |

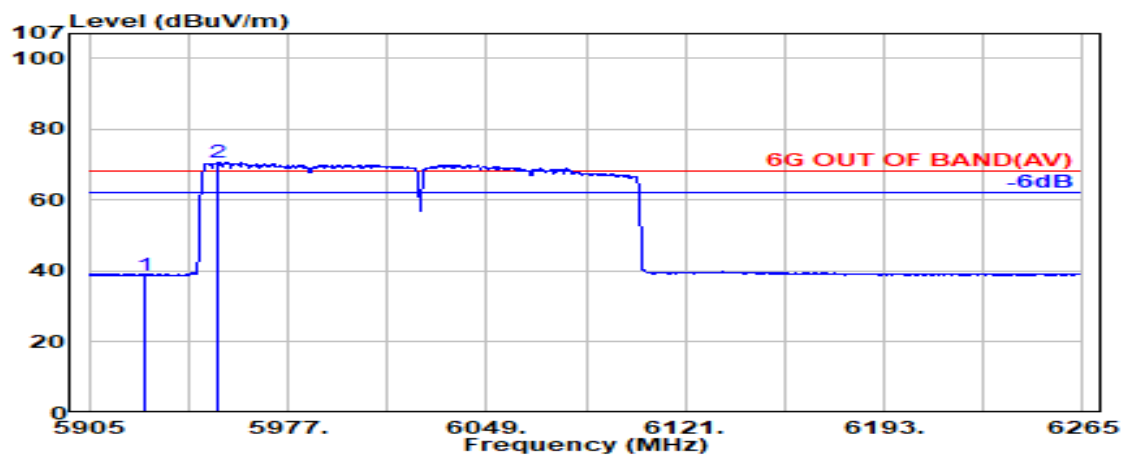

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.06             | 38.88                   | 68.20           | 29.32       | Average  |
| @ 5951.440               | 34.30                 | 9.00            | 34.38            | 61.90             | 70.83                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | S68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

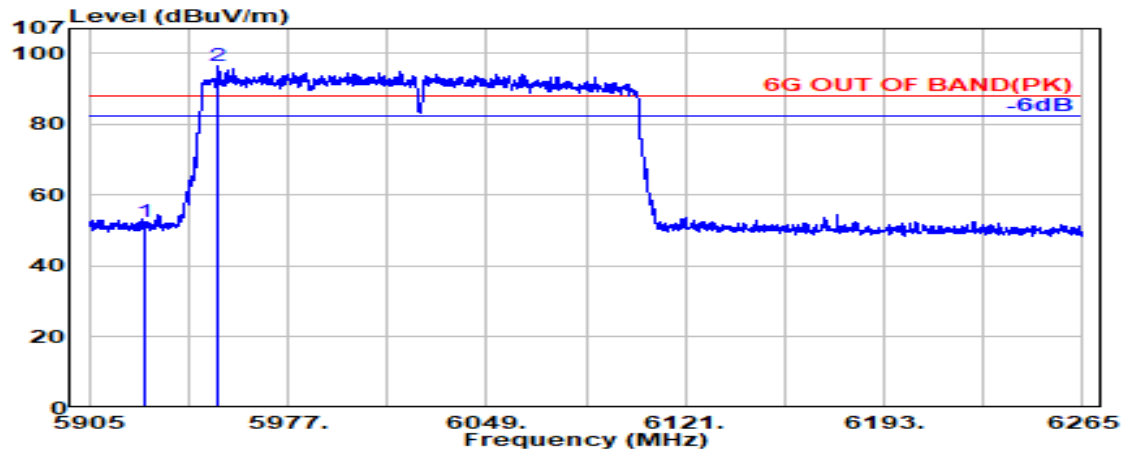

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.56             | 52.39                   | 88.20           | 35.81       | Peak     |
| @ 5951.980               | 34.30                 | 9.00            | 34.38                  | 87.69             | 96.62                   | ---             | ---         | Peak     |

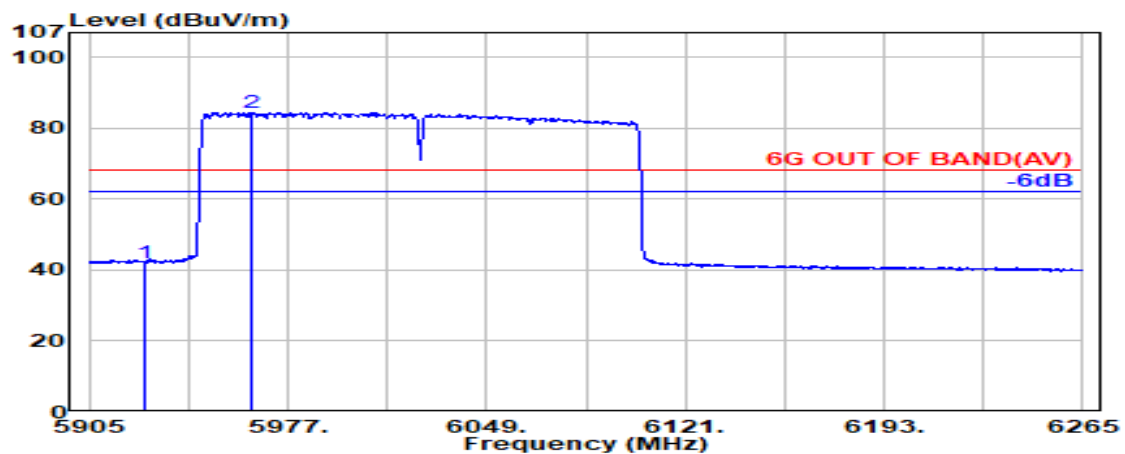

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 33.35             | 42.17                   | 68.20           | 26.03       | Average  |
| @ 5963.860               | 34.27                 | 9.01            | 34.38                  | 75.54             | 84.44                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | S68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

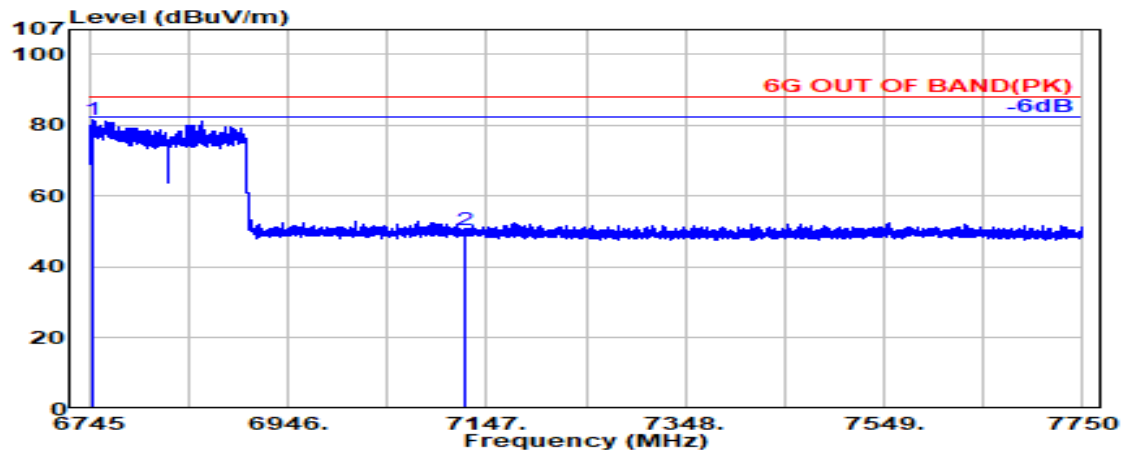

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6748.806               | 35.50                 | 9.56            | 34.25            | 70.89             | 81.69                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.19             | 50.40                   | 88.20           | 37.80       | Peak     |

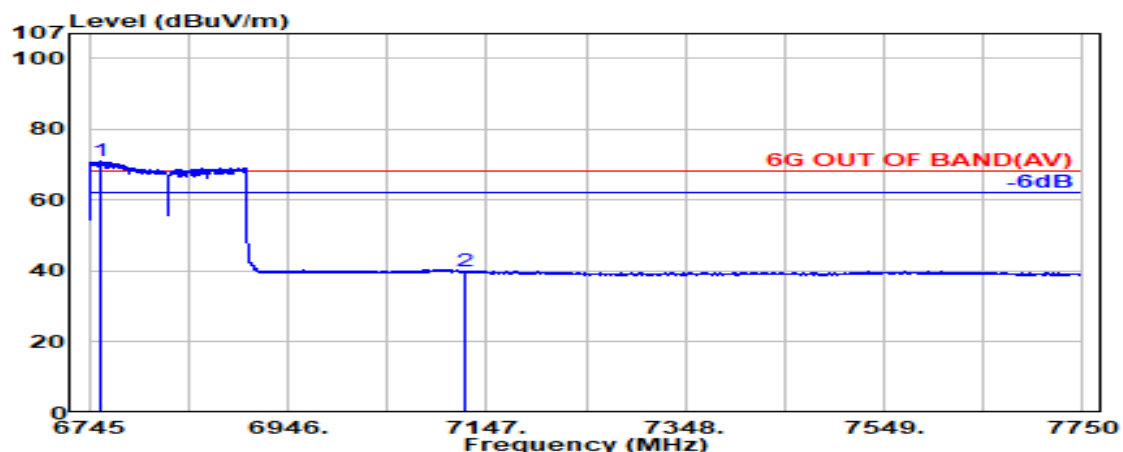

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6755.347               | 35.51                 | 9.56            | 34.26            | 60.06             | 70.87                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.63             | 39.84                   | 68.20           | 28.36       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | S68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

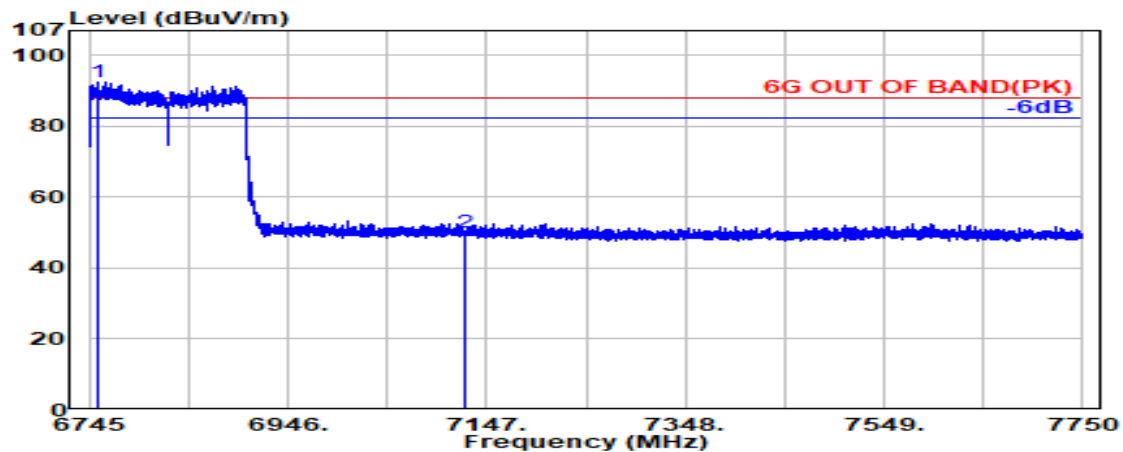

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6754.396               | 35.51                 | 9.56            | 34.26                  | 81.63             | 92.44                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.86             | 50.07                   | 88.20           | 38.13       | Peak     |

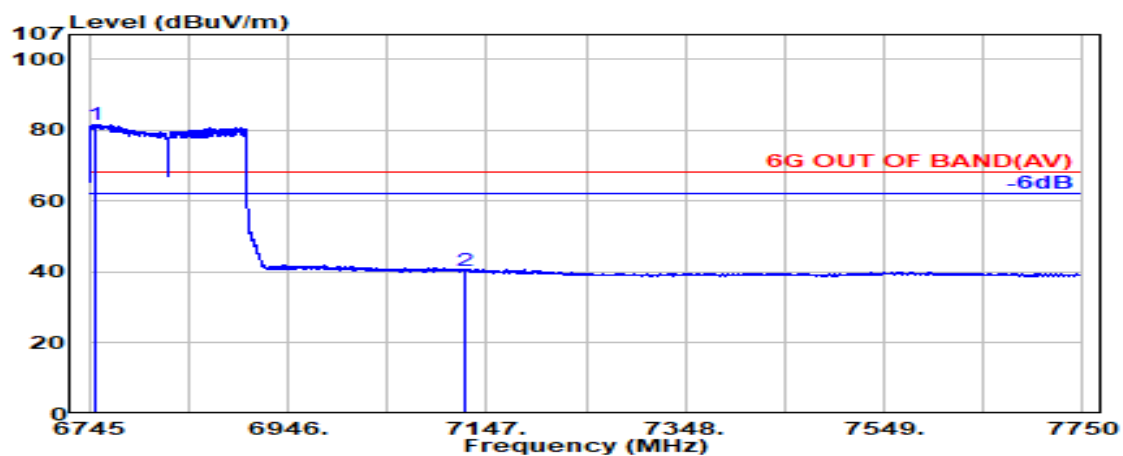

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6752.493               | 35.51                 | 9.56            | 34.25                  | 70.77             | 81.58                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 29.37             | 40.58                   | 68.20           | 27.62       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 70         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

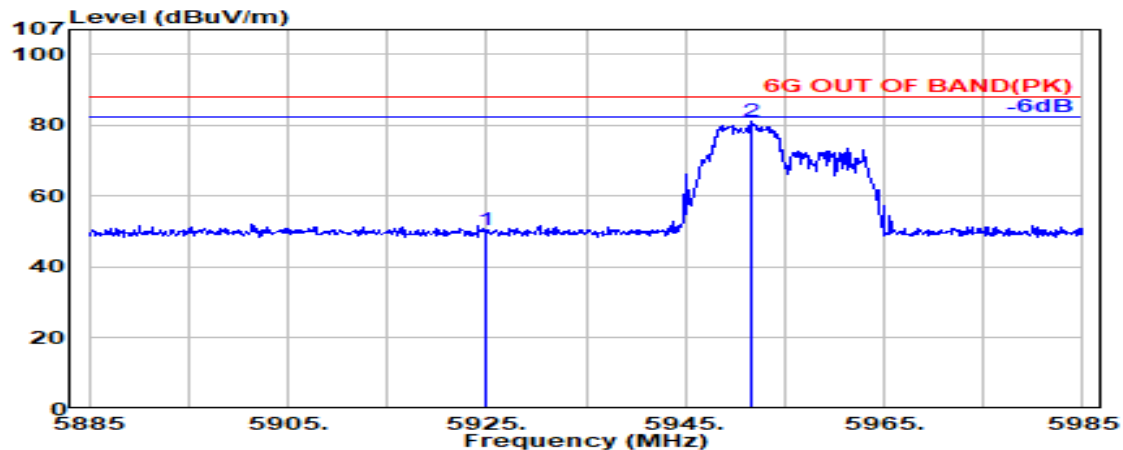

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.45             | 50.28                   | 88.20           | 37.92       | Peak     |
| @ 5951.600               | 34.30                 | 9.00            | 34.38                  | 72.29             | 81.21                   | ---             | ---         | Peak     |

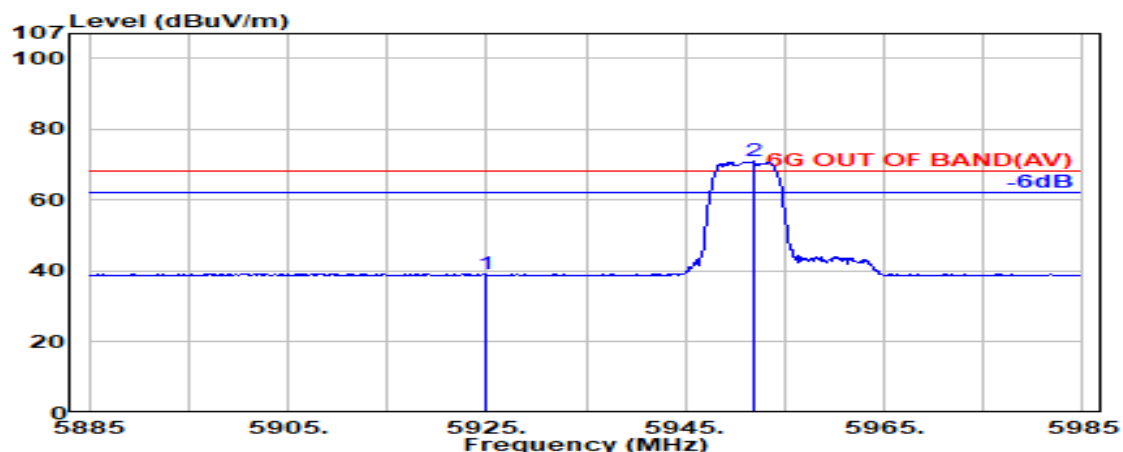


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.18             | 39.00                   | 68.20           | 29.20       | Average  |
| @ 5951.800               | 34.30                 | 9.00            | 34.38                  | 62.03             | 70.95                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 70         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

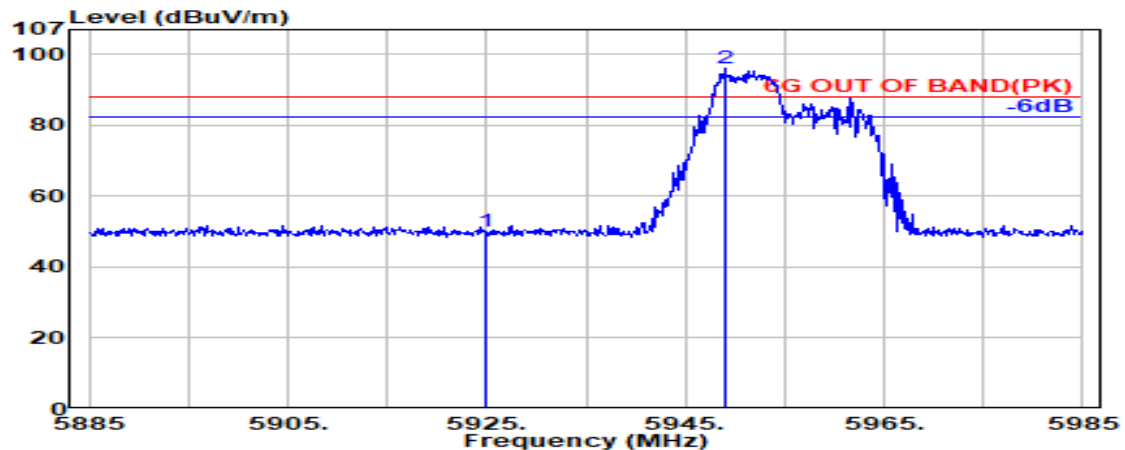

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.12             | 49.95                   | 88.20           | 38.25       | Peak     |
| @ 5948.900               | 34.30                 | 9.00            | 34.38                  | 87.13             | 96.05                   | ---             | ---         | Peak     |

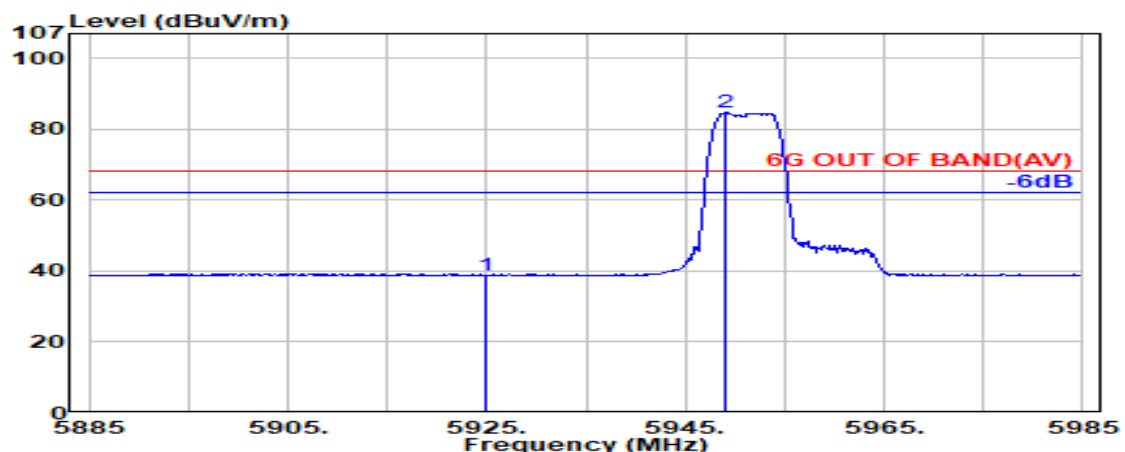

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 29.93             | 38.75                   | 68.20           | 29.45       | Average  |
| @ 5949.100               | 34.30                 | 9.00            | 34.38                  | 75.88             | 84.80                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 75         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

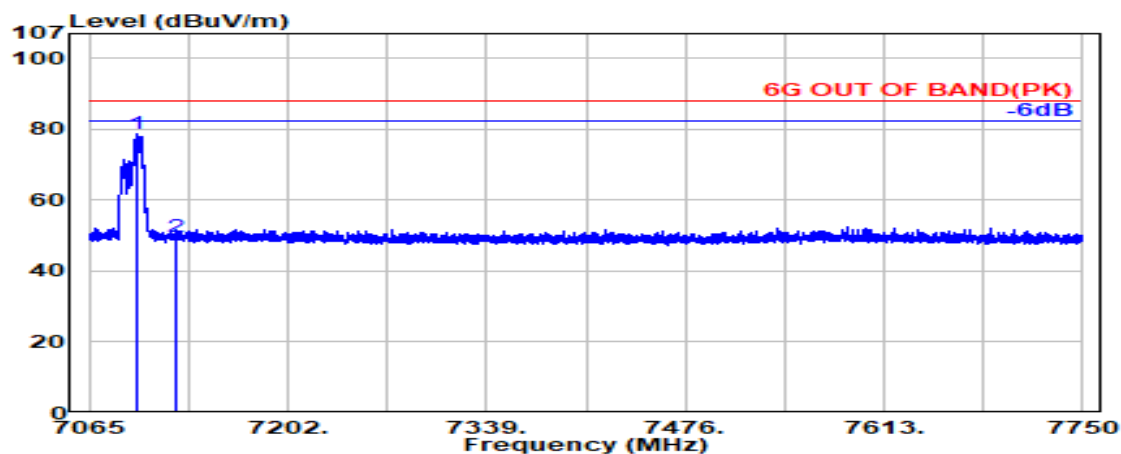

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7098.700               | 35.79                 | 9.78            | 34.47                  | 67.67             | 78.78                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.58             | 49.79                   | 88.20           | 38.41       | Peak     |

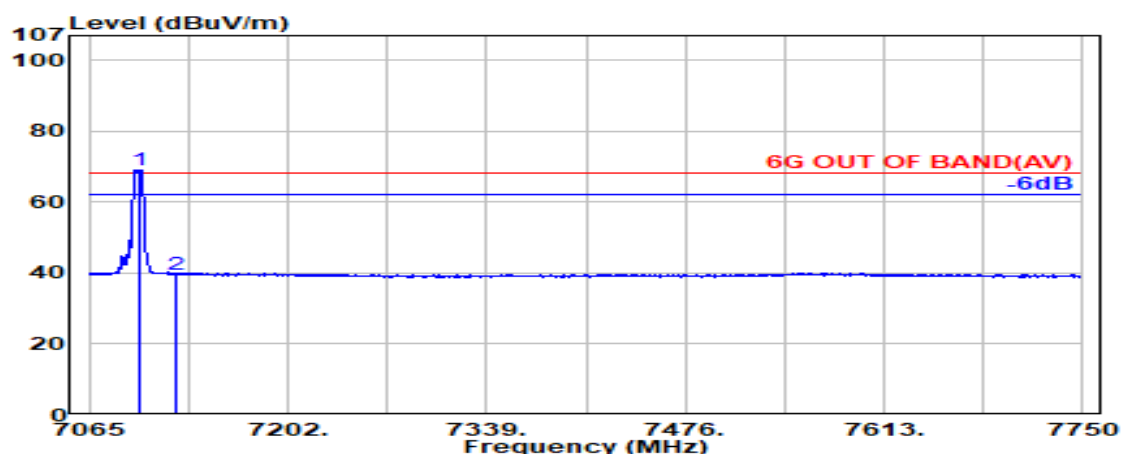

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7099.300               | 35.80                 | 9.78            | 34.47                  | 58.11             | 69.22                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.49             | 39.70                   | 68.20           | 28.50       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 75         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

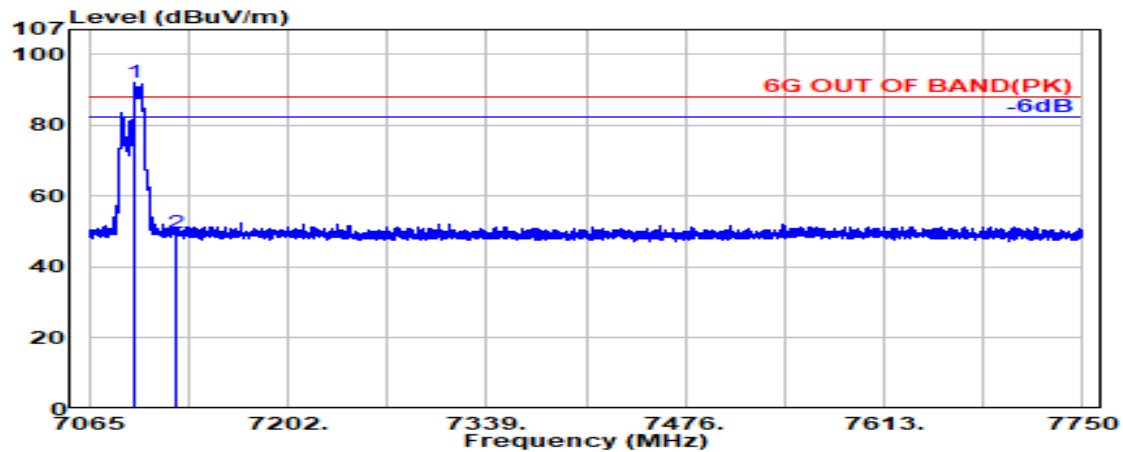

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7096.500               | 35.79                 | 9.78            | 34.47                  | 81.16             | 92.26                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.52             | 49.73                   | 88.20           | 38.47       | Peak     |

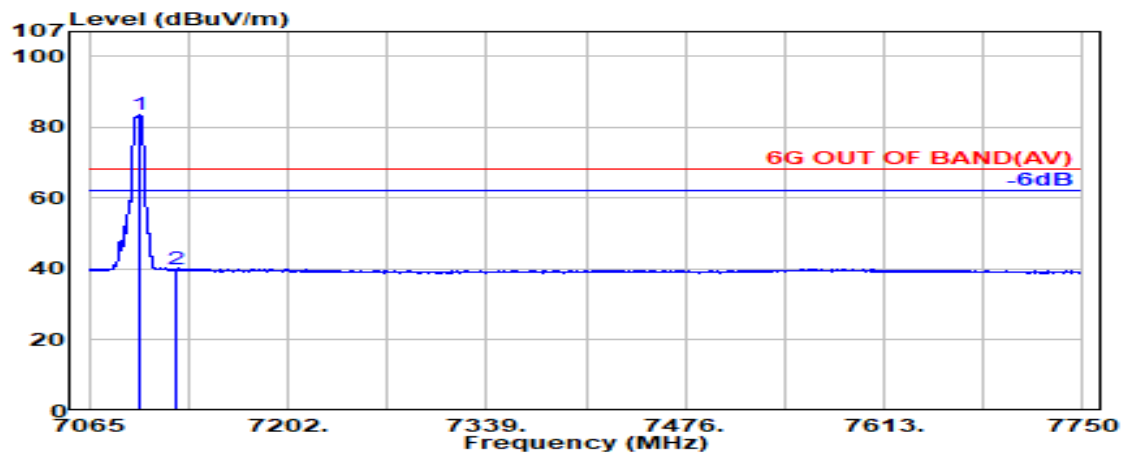

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7099.000               | 35.80                 | 9.78            | 34.47                  | 72.32             | 83.43                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.68             | 39.90                   | 68.20           | 28.30       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel:** +886 2 26099301


**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 82         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

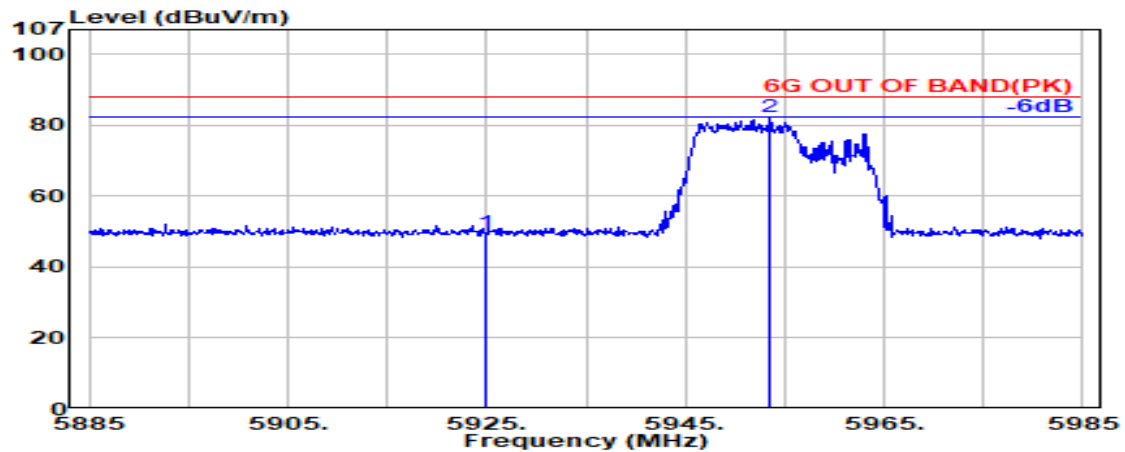

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.81             | 49.64                   | 88.20           | 38.56       | Peak     |
| @ 5953.500               | 34.29                 | 9.01            | 34.38            | 73.59             | 82.51                   | ---             | ---         | Peak     |

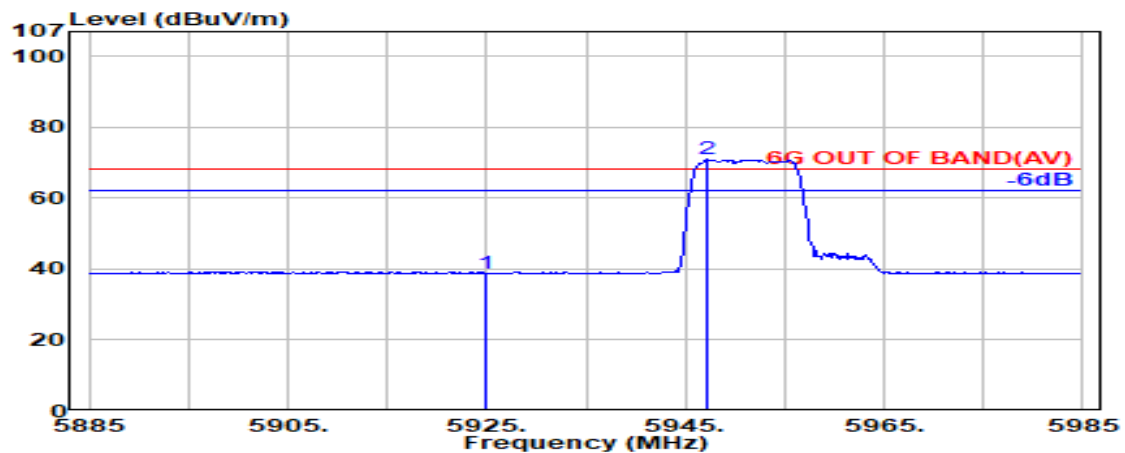


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.02             | 38.85                   | 68.20           | 29.35       | Average  |
| @ 5947.300               | 34.29                 | 9.00            | 34.38            | 62.06             | 70.98                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 82         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

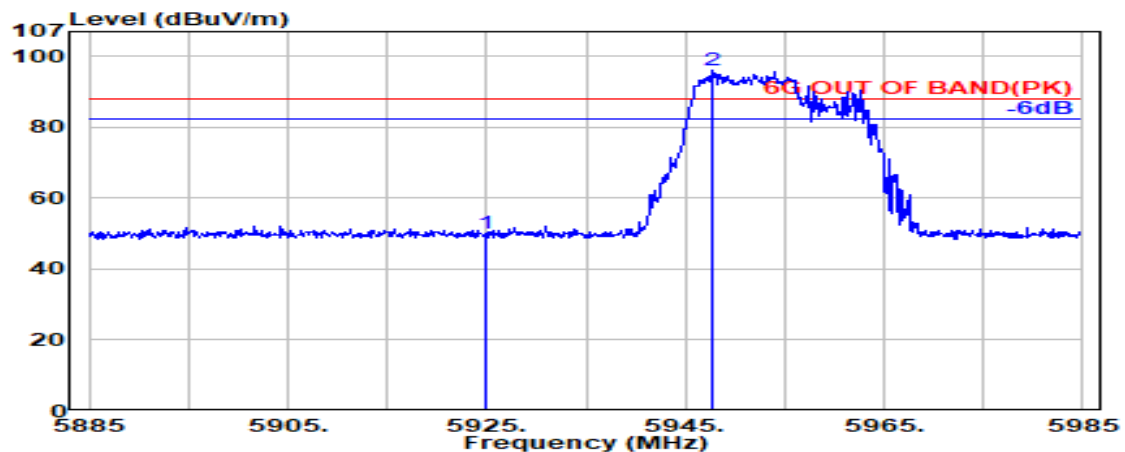

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.18             | 50.01                   | 88.20           | 38.19       | Peak     |
| @ 5947.600               | 34.29                 | 9.00            | 34.38                  | 87.34             | 96.25                   | ---             | ---         | Peak     |

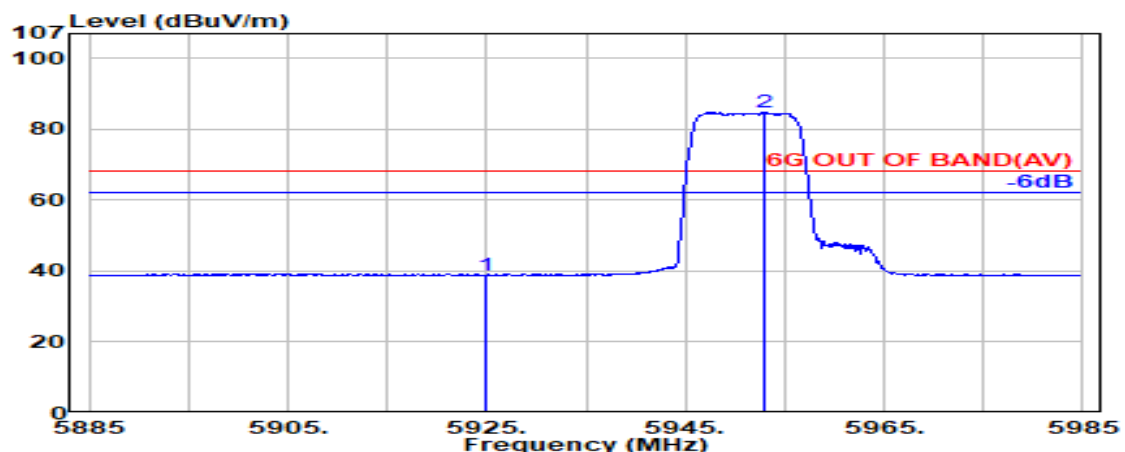

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.11             | 38.93                   | 68.20           | 29.27       | Average  |
| @ 5953.000               | 34.29                 | 9.00            | 34.38                  | 75.84             | 84.76                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 85         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

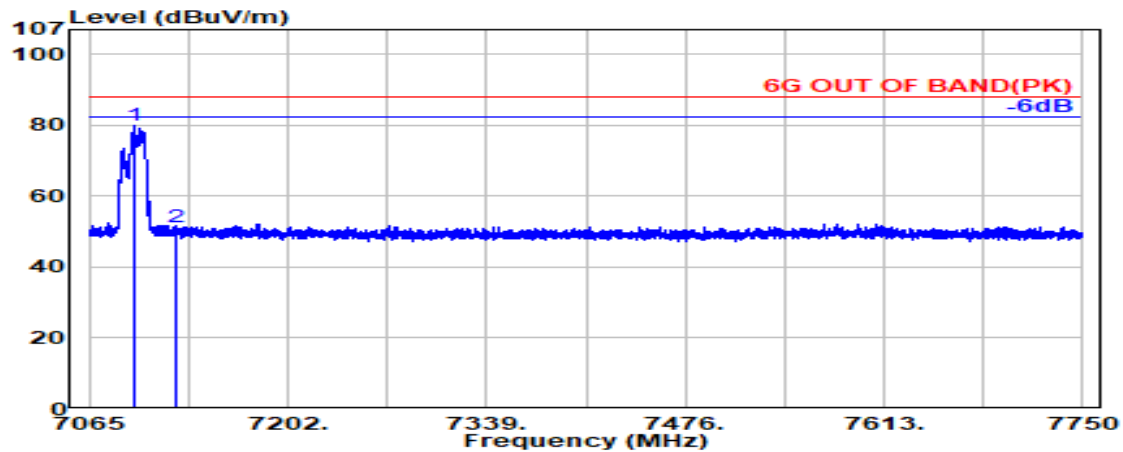

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7095.700               | 35.78                 | 9.78            | 34.47            | 68.85             | 79.94                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.96             | 51.17                   | 88.20           | 37.03       | Peak     |

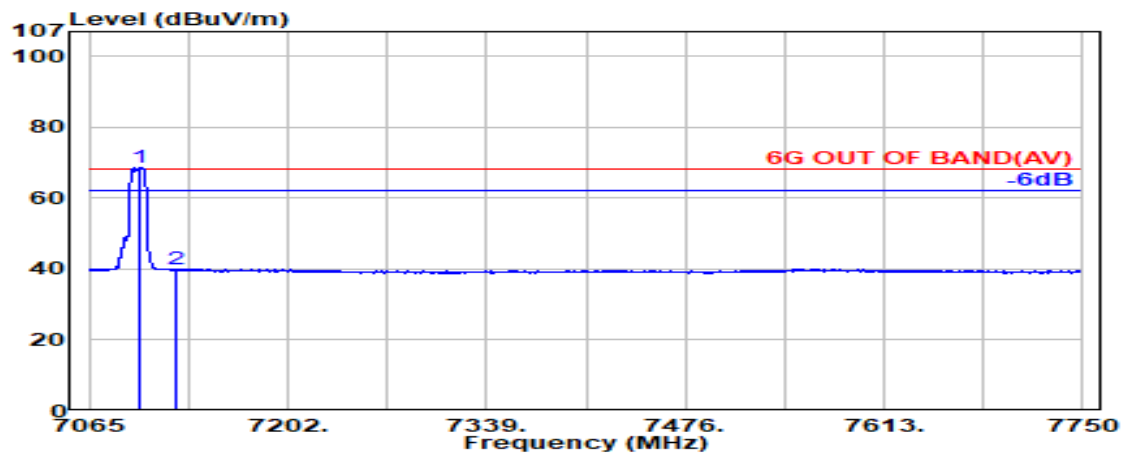

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7100.200               | 35.80                 | 9.78            | 34.47            | 57.64             | 68.75                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.73             | 39.94                   | 68.20           | 28.26       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 85         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

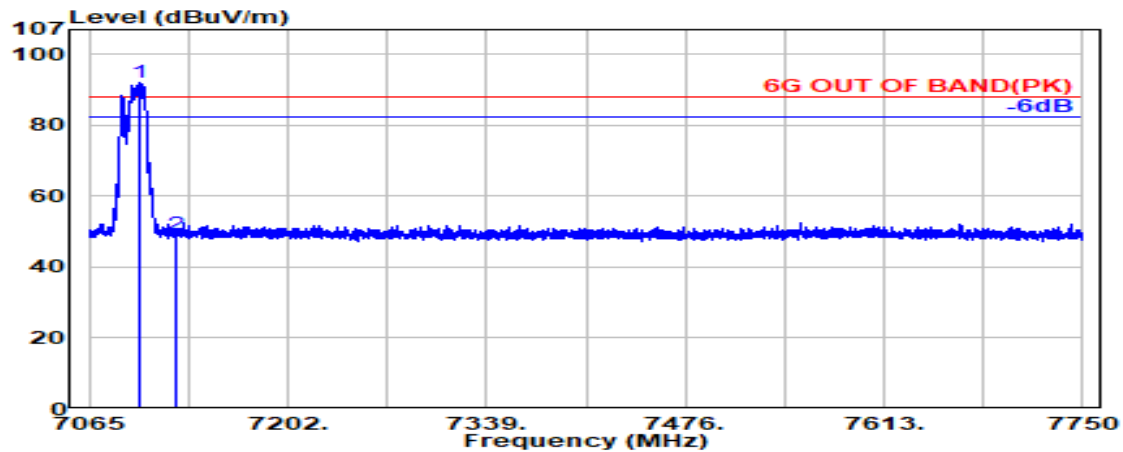

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7099.400               | 35.80                 | 9.78            | 34.47            | 81.11             | 92.22                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.20             | 49.41                   | 88.20           | 38.79       | Peak     |

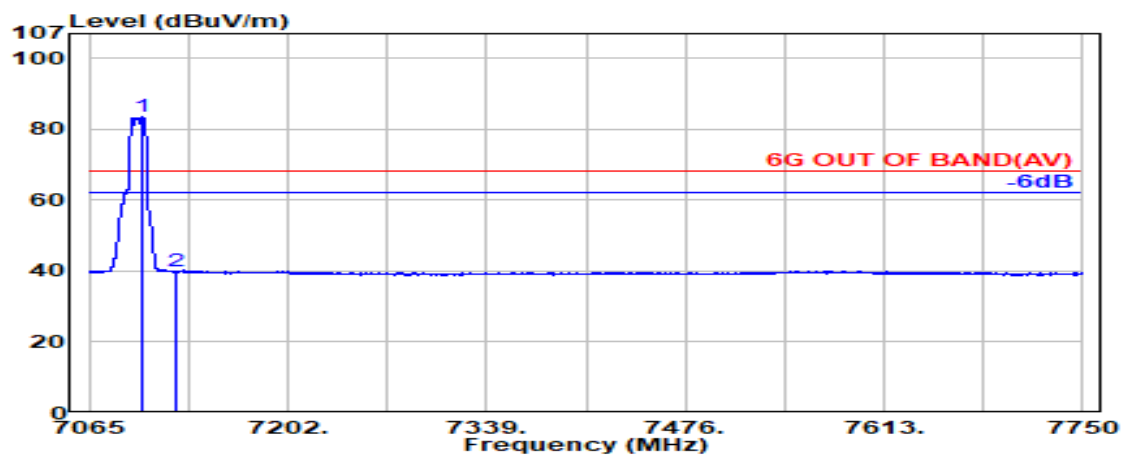

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.500               | 35.81                 | 9.79            | 34.47            | 72.32             | 83.44                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.64             | 39.85                   | 68.20           | 28.35       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 93         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

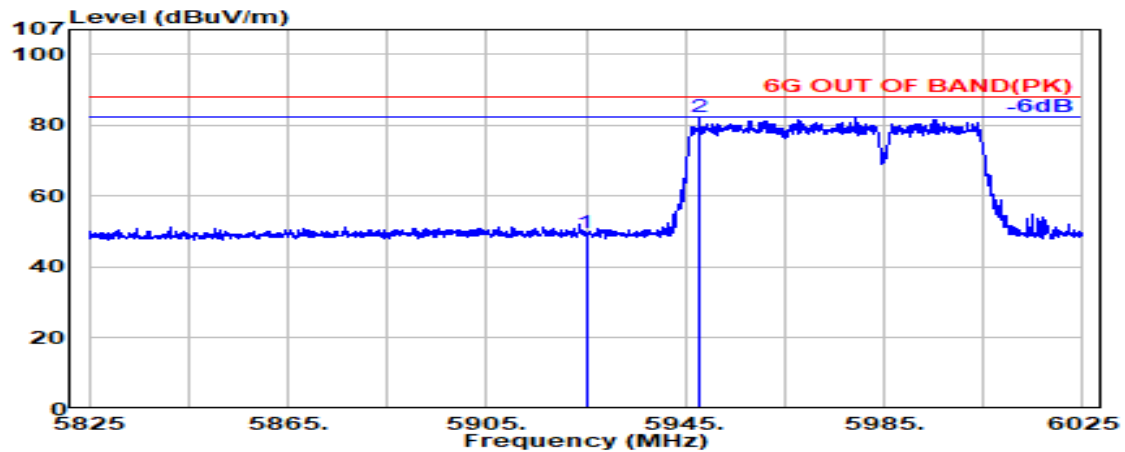

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.99             | 49.81                   | 88.20           | 38.39       | Peak     |
| @ 5948.000               | 34.29                 | 9.00            | 34.38                  | 73.25             | 82.17                   | ---             | ---         | Peak     |

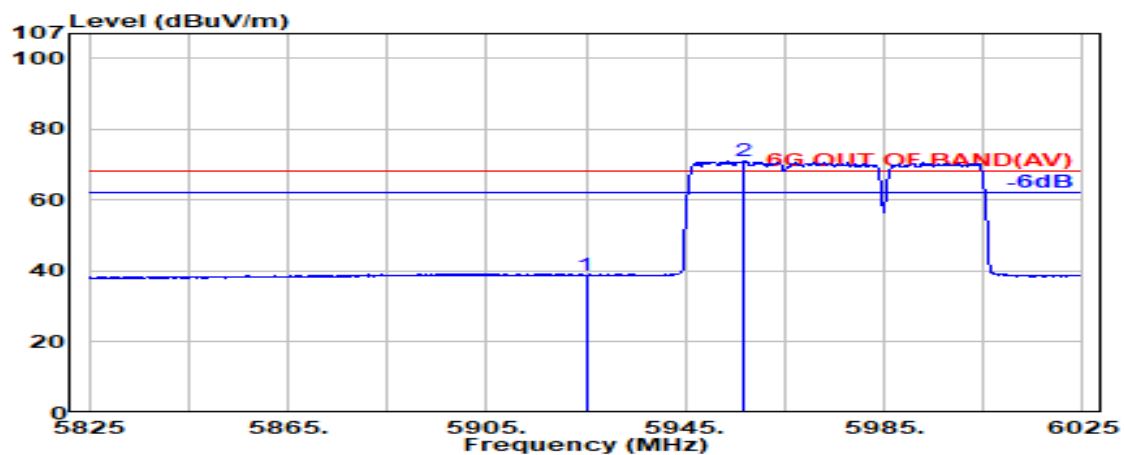

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.08             | 38.91                   | 68.20           | 29.29       | Average  |
| @ 5956.900               | 34.29                 | 9.01            | 34.38                  | 62.17             | 71.08                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 93         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

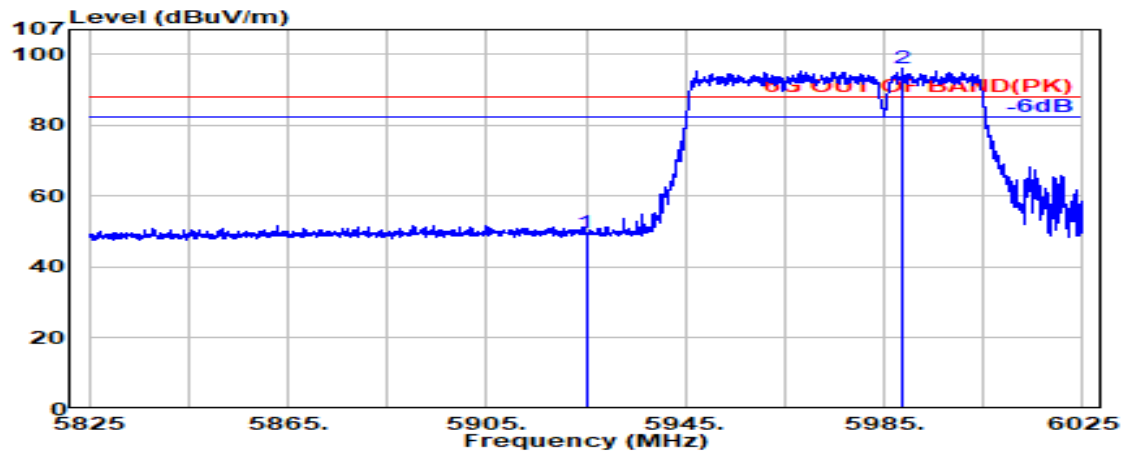

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.70             | 49.52                   | 88.20           | 38.68       | Peak     |
| @ 5988.600               | 34.22                 | 9.02            | 34.39            | 87.10             | 95.95                   | ---             | ---         | Peak     |

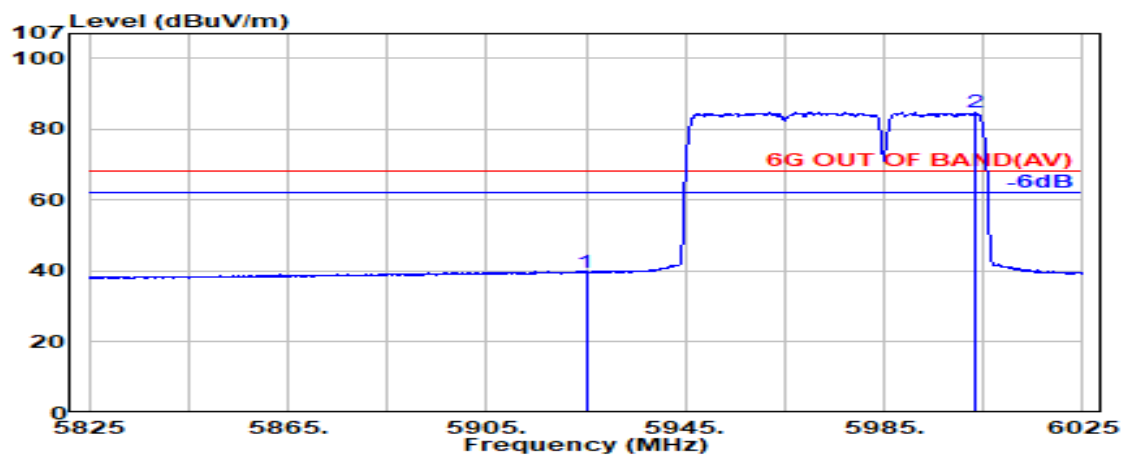

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.79             | 39.62                   | 68.20           | 28.58       | Average  |
| @ 6003.300               | 34.20                 | 9.03            | 34.40            | 75.97             | 84.80                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 90         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

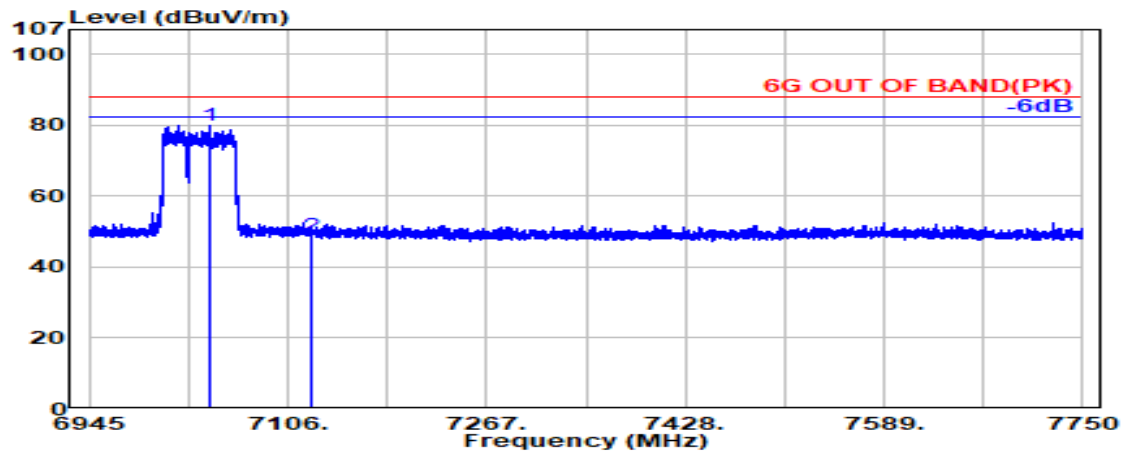

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7042.600               | 35.59                 | 9.75            | 34.43            | 69.04             | 79.94                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 37.44             | 48.66                   | 88.20           | 39.54       | Peak     |

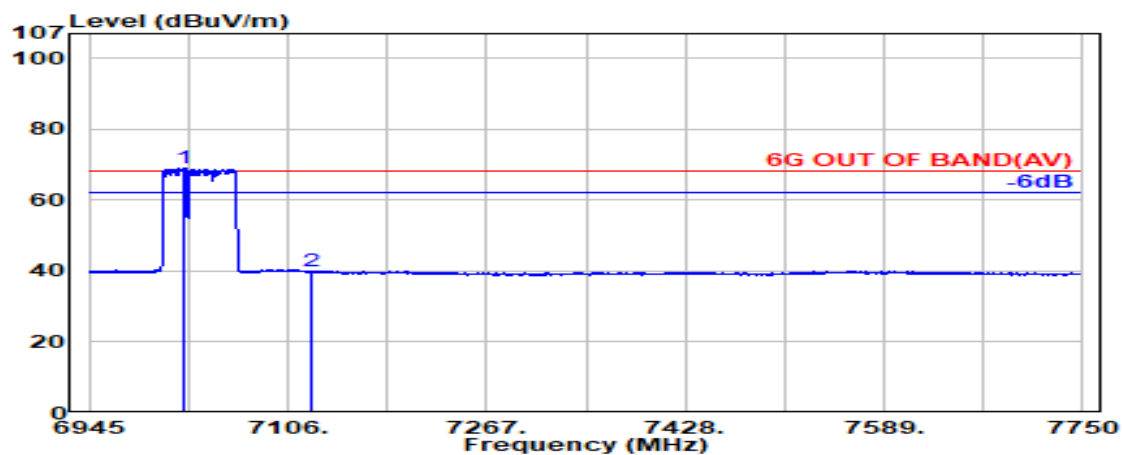

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7022.500               | 35.55                 | 9.73            | 34.42            | 58.13             | 69.00                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.59             | 39.80                   | 68.20           | 28.40       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 90         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

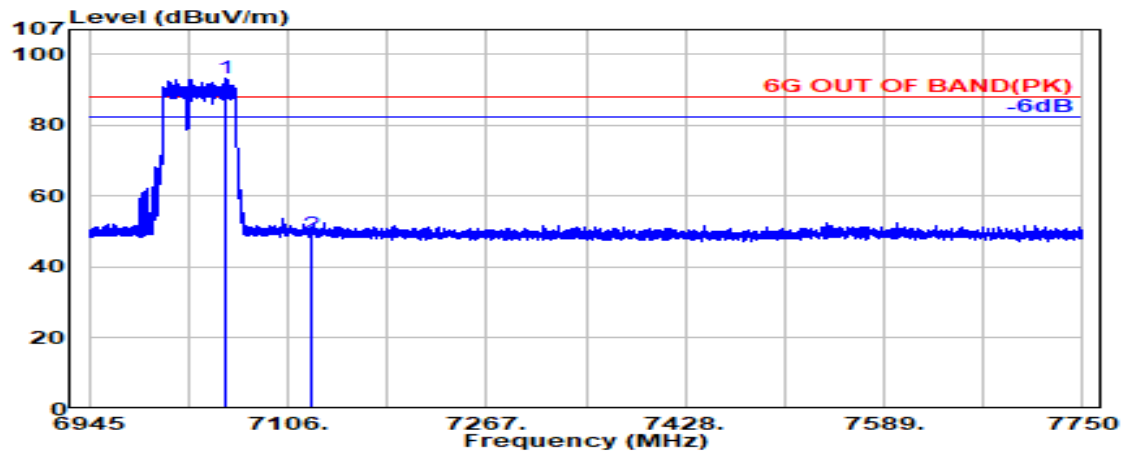

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7054.900               | 35.62                 | 9.76            | 34.44            | 82.27             | 93.21                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.17             | 49.38                   | 88.20           | 38.82       | Peak     |

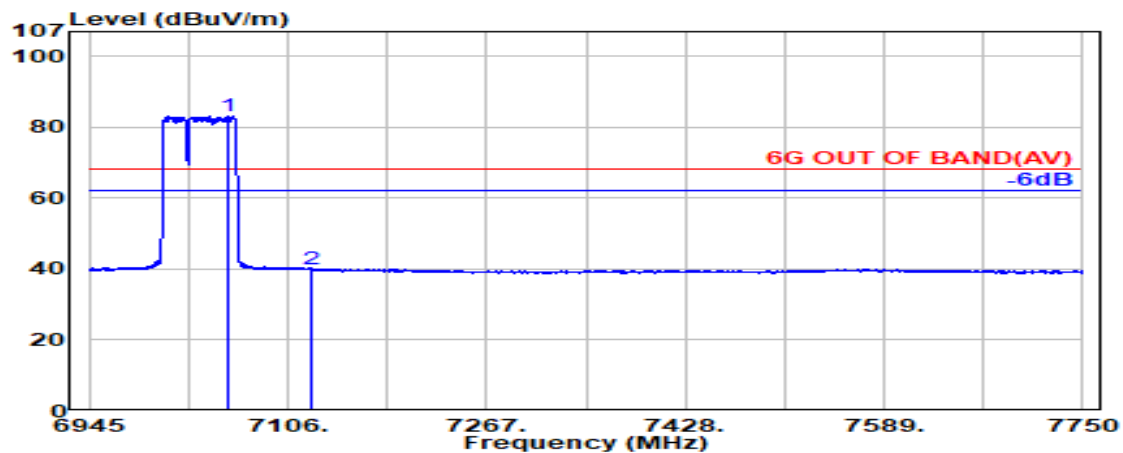

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7057.900               | 35.63                 | 9.76            | 34.44            | 72.17             | 83.12                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.79             | 40.00                   | 68.20           | 28.20       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | S95        |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

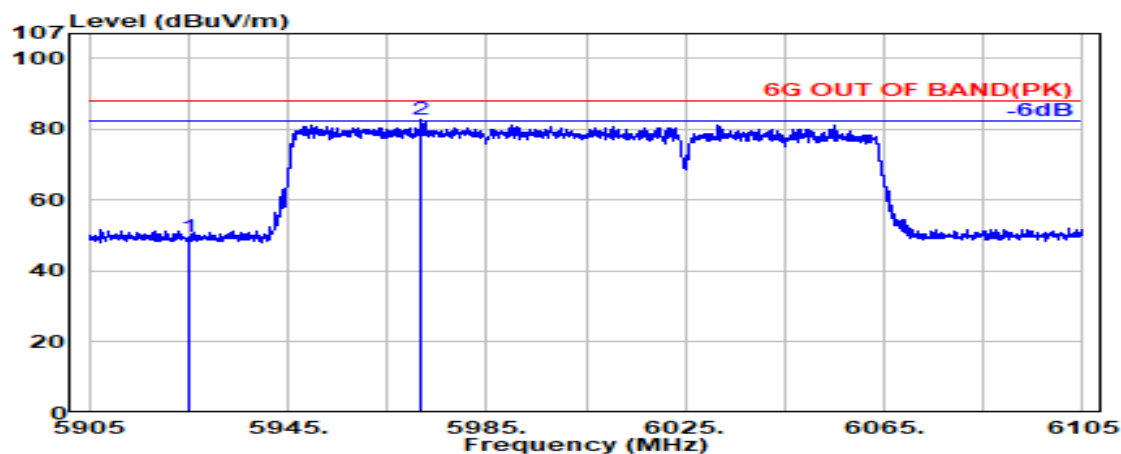

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.76             | 49.58                   | 88.20           | 38.62       | Peak     |
| @ 5971.600               | 34.26                 | 9.01            | 34.39                  | 73.69             | 82.58                   | ---             | ---         | Peak     |

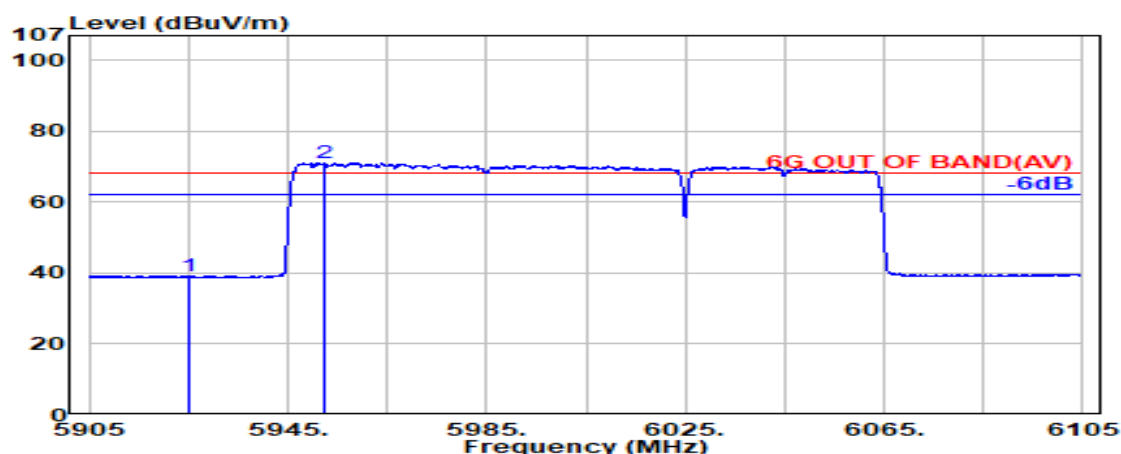

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.17             | 38.99                   | 68.20           | 29.21       | Average  |
| @ 5952.500               | 34.29                 | 9.00            | 34.38                  | 62.20             | 71.12                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | S95        |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

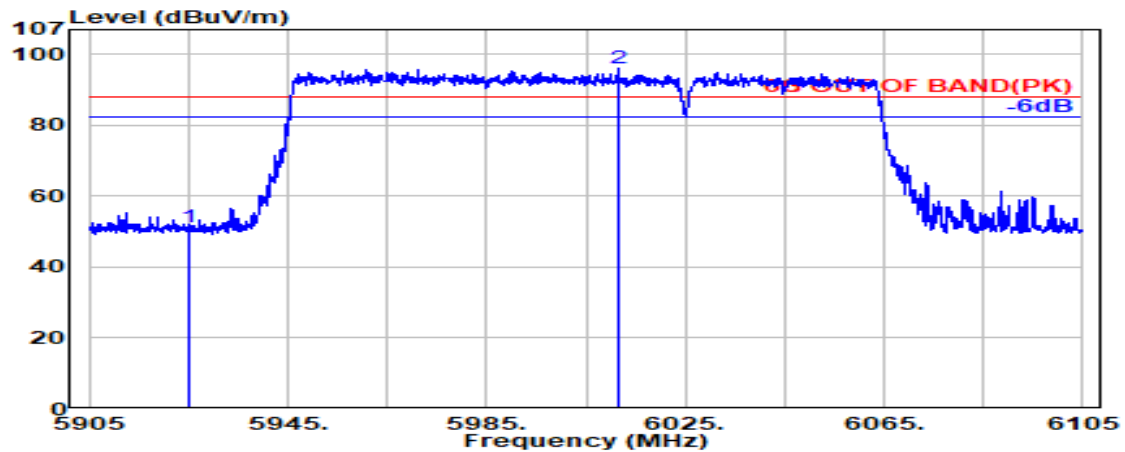

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.30             | 51.12                   | 88.20           | 37.08       | Peak     |
| @ 6011.400               | 34.20                 | 9.04            | 34.39                  | 87.17             | 96.02                   | ---             | ---         | Peak     |

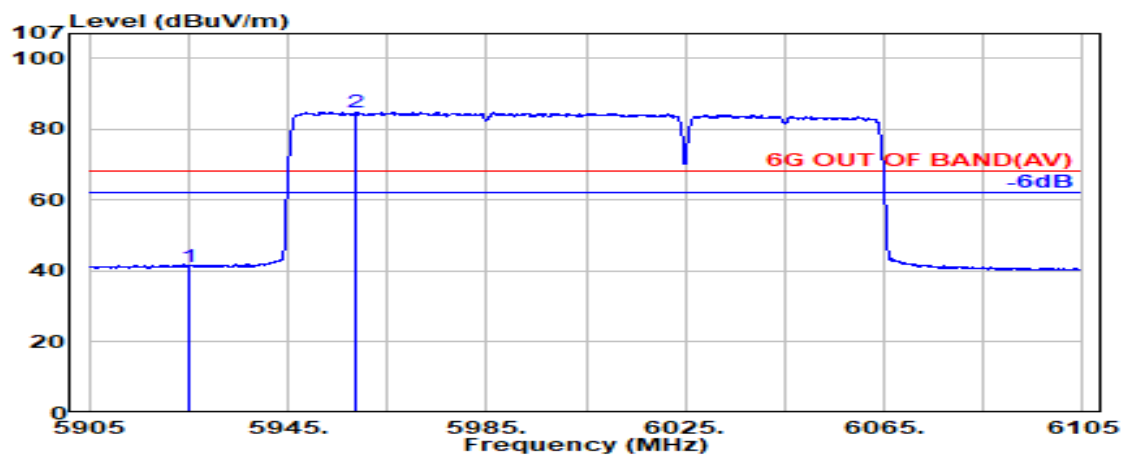

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 32.41             | 41.24                   | 68.20           | 26.96       | Average  |
| @ 5958.800               | 34.28                 | 9.01            | 34.38                  | 75.95             | 84.86                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 94         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

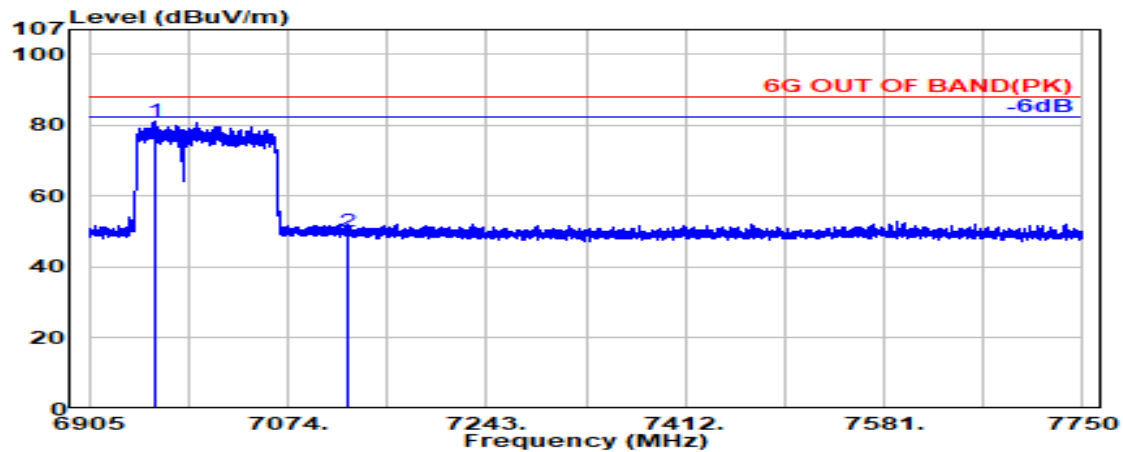

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6961.200               | 35.50                 | 9.70            | 34.38                  | 70.32             | 81.14                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.84             | 50.05                   | 88.20           | 38.15       | Peak     |

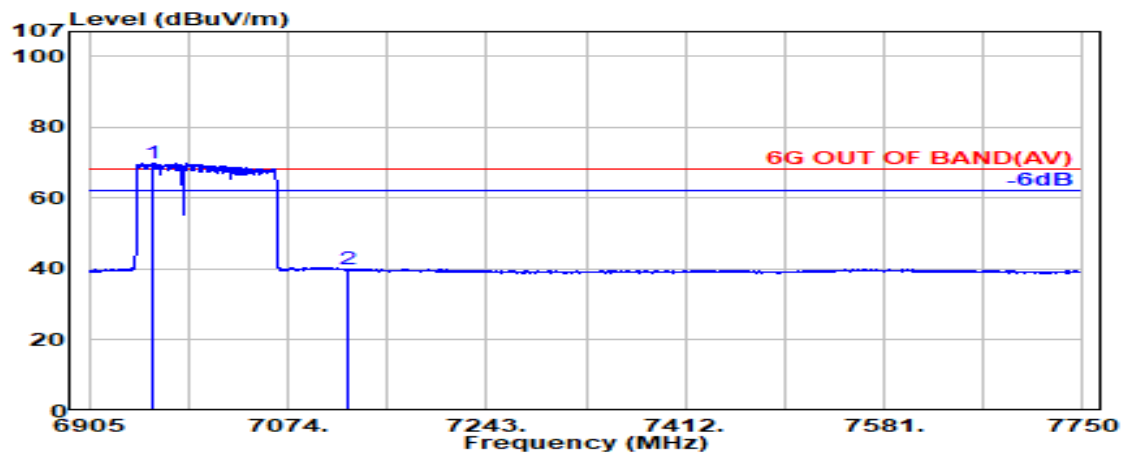

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6958.900               | 35.50                 | 9.69            | 34.38                  | 59.01             | 69.83                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.65             | 39.86                   | 68.20           | 28.34       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 94         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

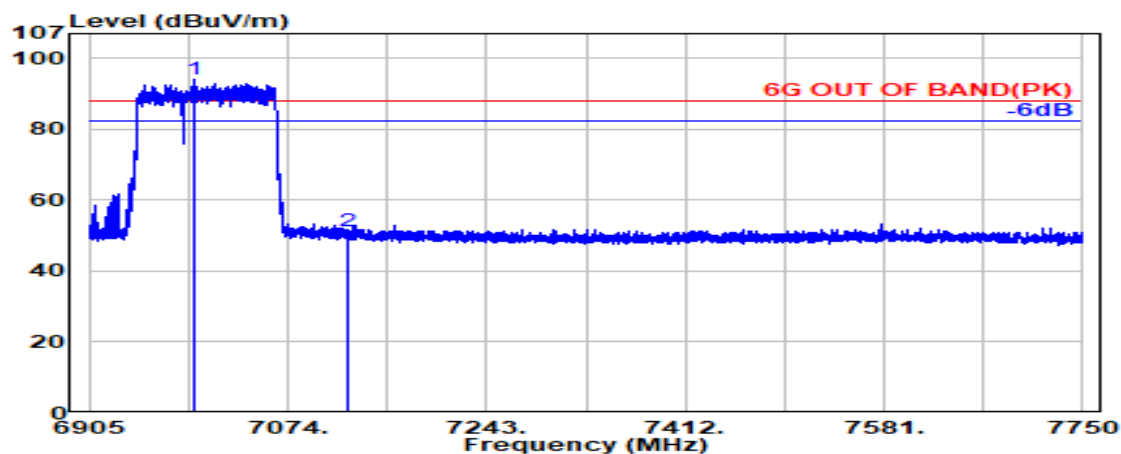

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6995.100               | 35.50                 | 9.72            | 34.40            | 83.38             | 94.20                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 40.07             | 51.28                   | 88.20           | 36.92       | Peak     |

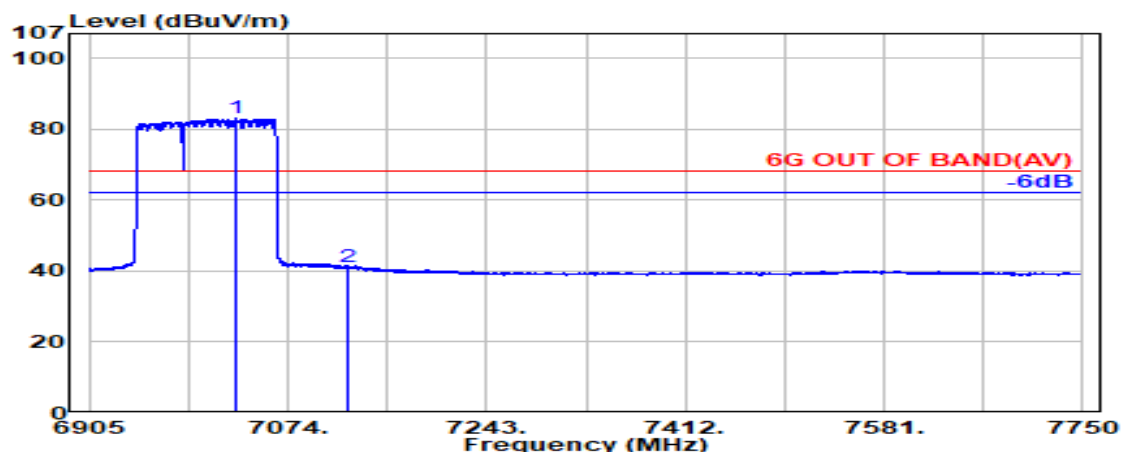

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7029.100               | 35.56                 | 9.74            | 34.42            | 72.20             | 83.08                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 30.06             | 41.27                   | 68.20           | 26.93       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | 98         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

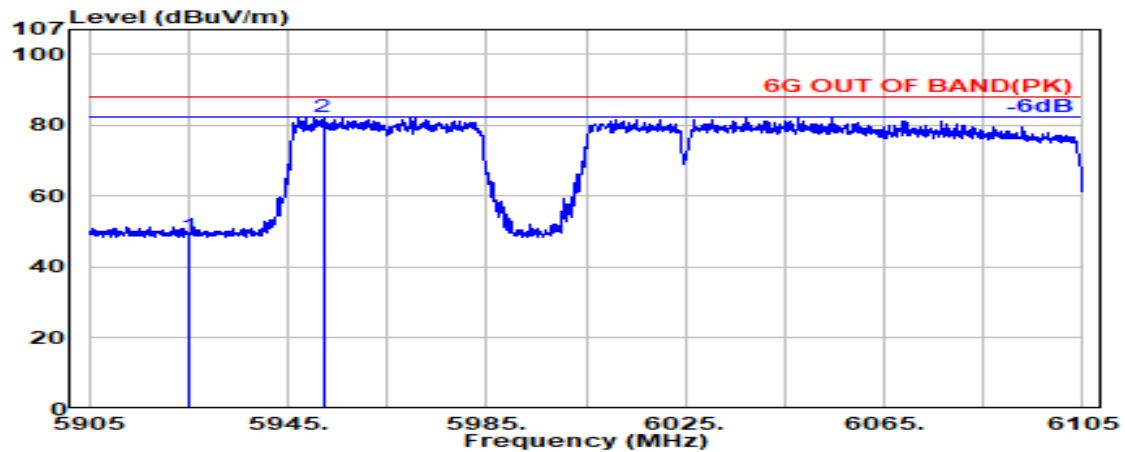

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.12             | 48.95                   | 88.20           | 39.25       | Peak     |
| @ 5952.100               | 34.30                 | 9.00            | 34.38                  | 73.64             | 82.56                   | ---             | ---         | Peak     |

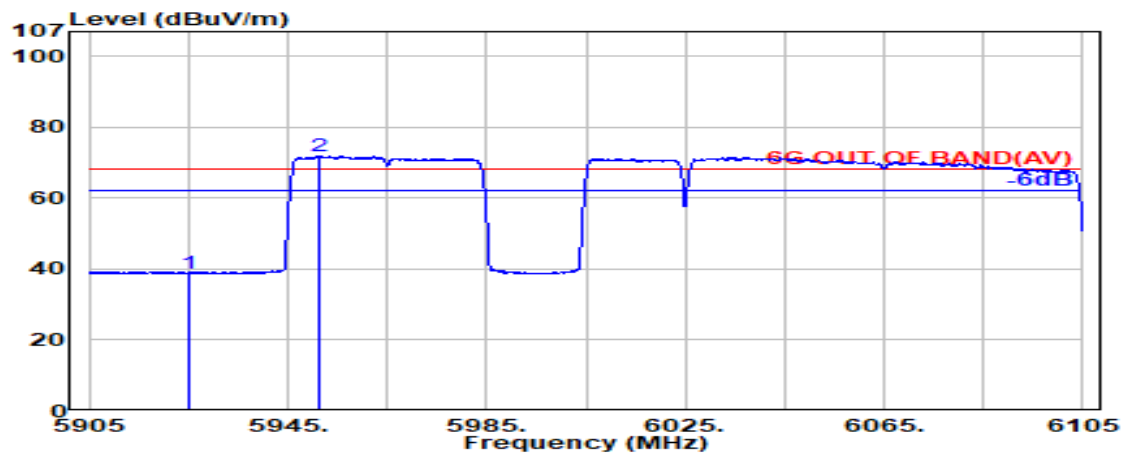

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.13             | 38.96                   | 68.20           | 29.24       | Average  |
| @ 5951.200               | 34.30                 | 9.00            | 34.38                  | 62.93             | 71.85                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | 98         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

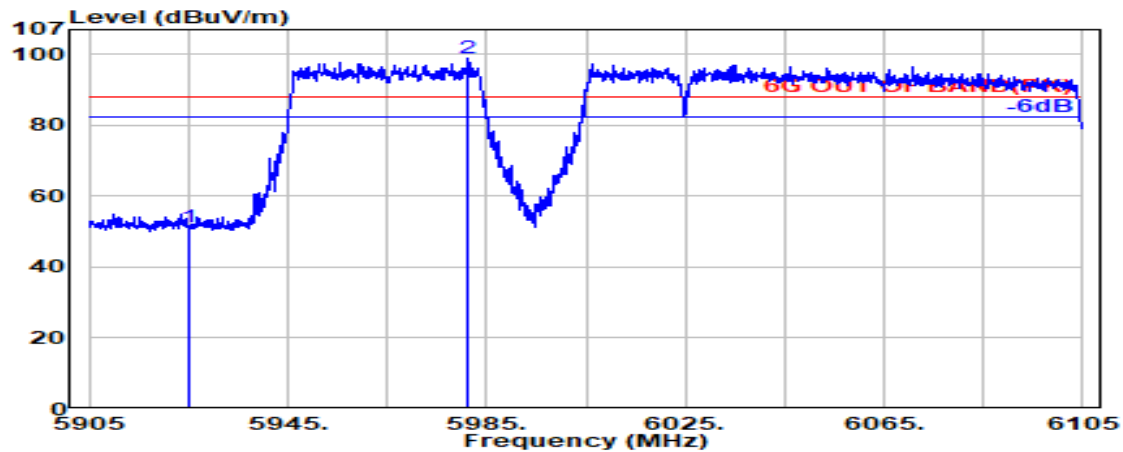

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 42.39             | 51.21                   | 88.20           | 36.99       | Peak     |
| @ 5981.400               | 34.24                 | 9.02            | 34.39            | 90.03             | 98.90                   | ---             | ---         | Peak     |



Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 34.53             | 43.35                   | 68.20           | 24.85       | Average  |
| @ 5954.500               | 34.29                 | 9.01            | 34.38            | 78.13             | 87.04                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | 96         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

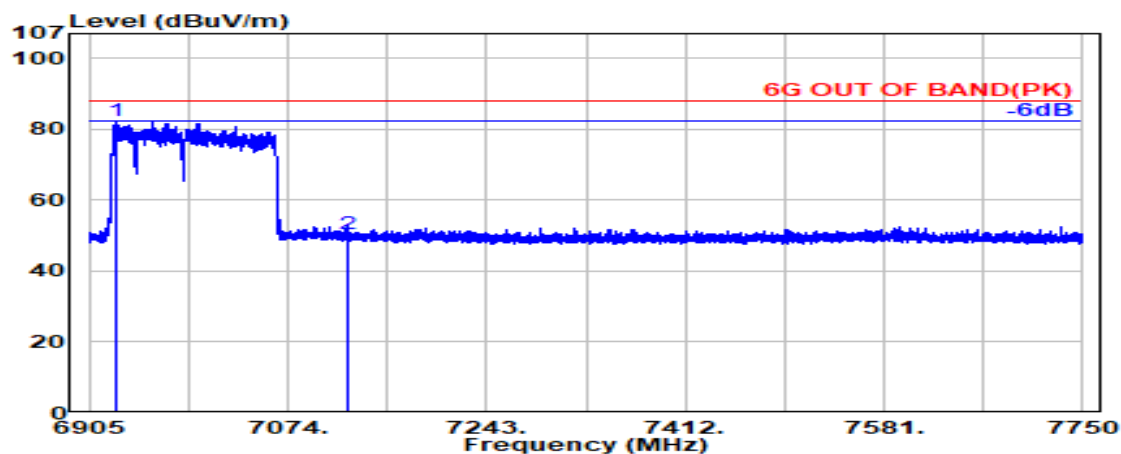

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6928.700               | 35.46                 | 9.67            | 34.36                  | 71.54             | 82.31                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.25             | 50.46                   | 88.20           | 37.74       | Peak     |

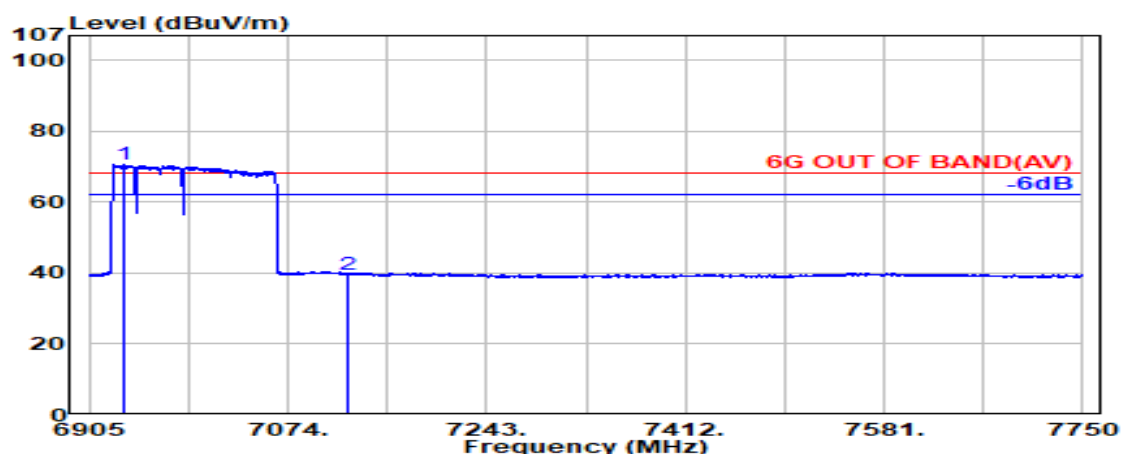

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6935.600               | 35.47                 | 9.68            | 34.36                  | 59.84             | 70.63                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.54             | 39.75                   | 68.20           | 28.45       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | 96         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

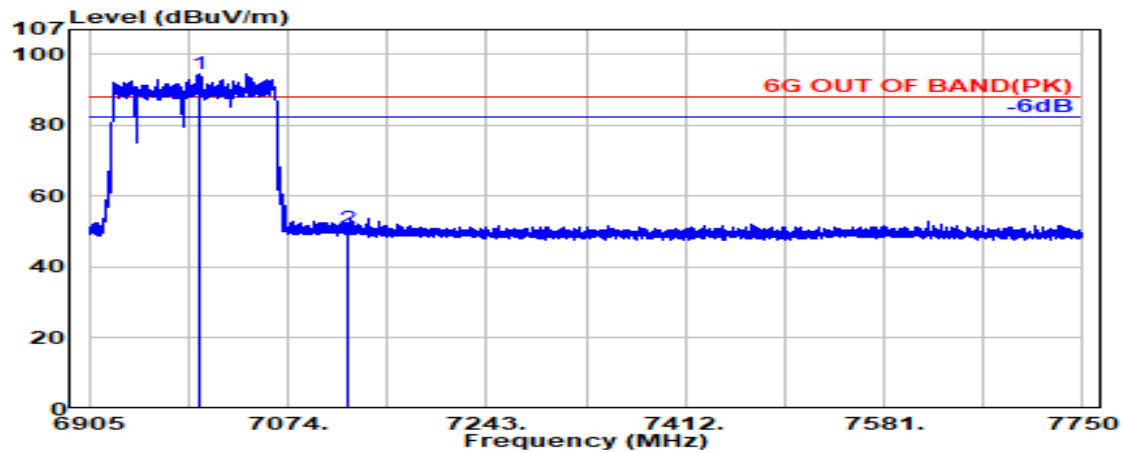

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6999.800               | 35.50                 | 9.72            | 34.40                  | 83.60             | 94.42                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.60             | 50.81                   | 88.20           | 37.39       | Peak     |

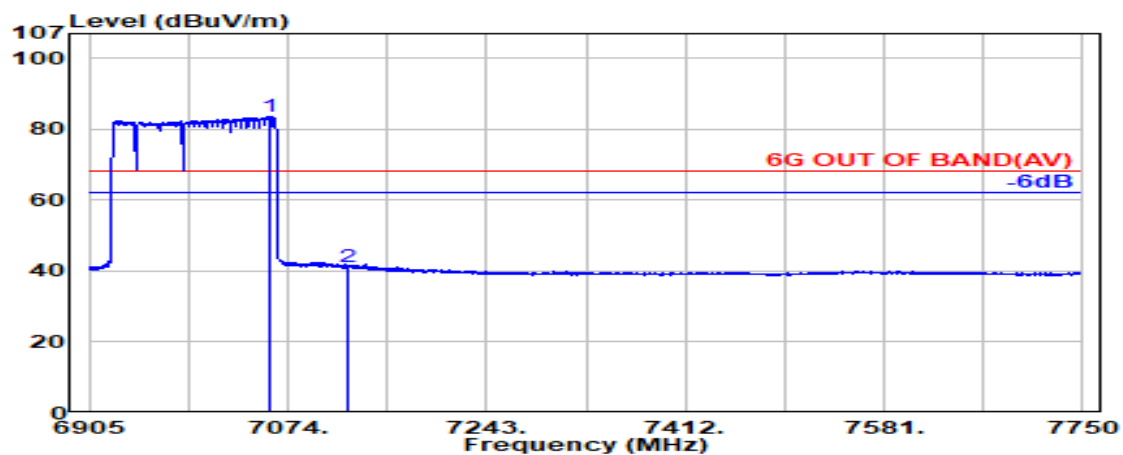

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7058.100               | 35.63                 | 9.76            | 34.44                  | 72.51             | 83.46                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.08             | 41.30                   | 68.20           | 26.90       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | S100       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

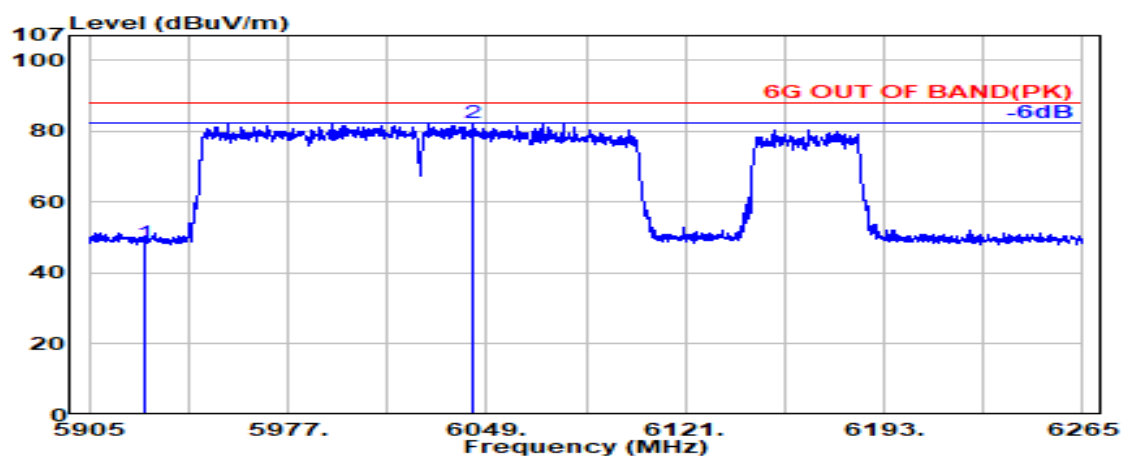

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 39.61             | 48.43                   | 88.20           | 39.77       | Peak     |
| @ 6043.960               | 34.20                 | 9.06            | 34.37            | 73.55             | 82.44                   | ---             | ---         | Peak     |

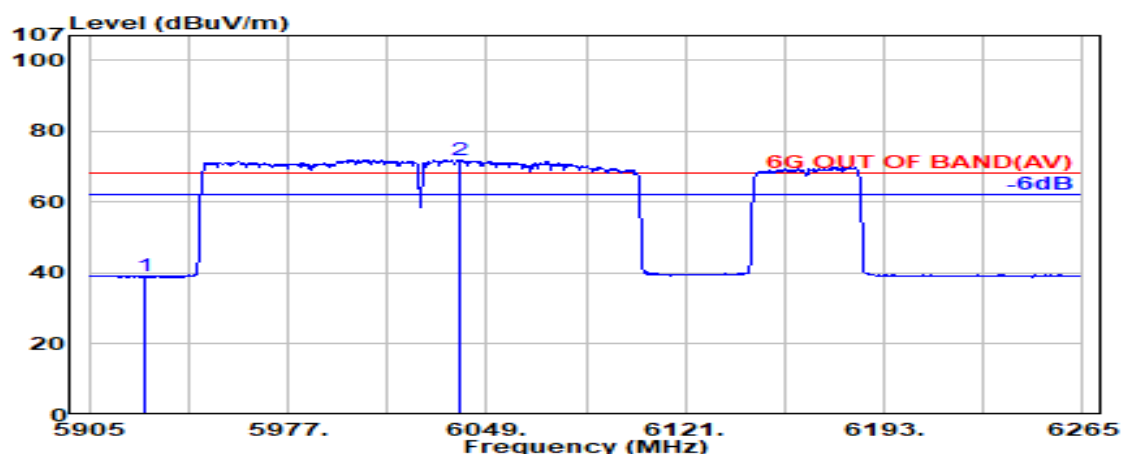


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.34             | 39.17                   | 68.20           | 29.03       | Average  |
| @ 6039.100               | 34.20                 | 9.06            | 34.38            | 63.14             | 72.03                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | S100       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

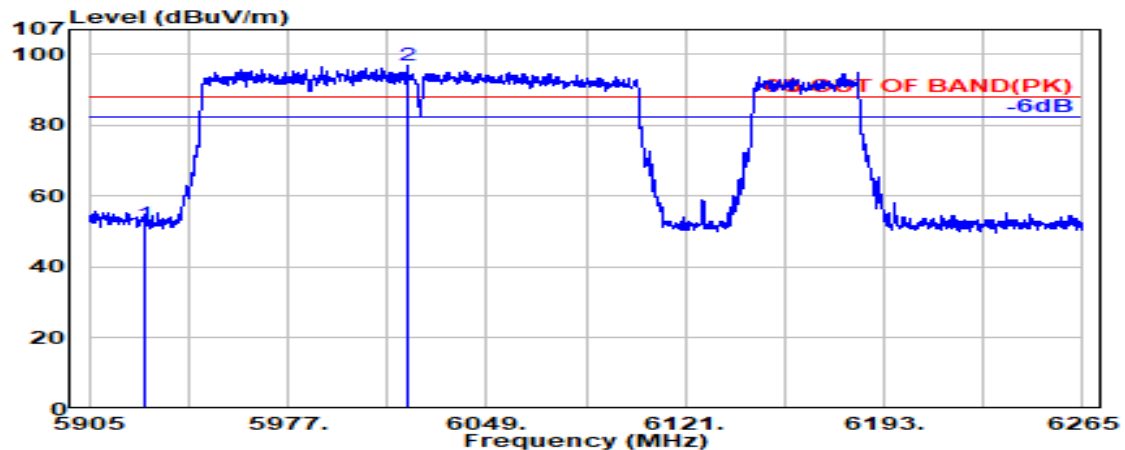

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.45             | 52.27                   | 88.20           | 35.93       | Peak     |
| @ 6020.380               | 34.20                 | 9.05            | 34.39                  | 88.12             | 96.98                   | ---             | ---         | Peak     |

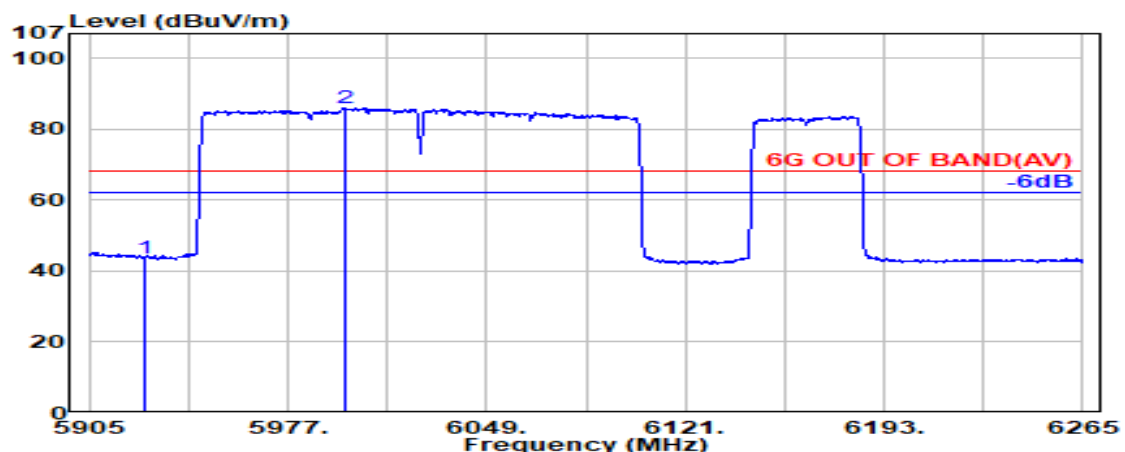

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 34.83             | 43.66                   | 68.20           | 24.54       | Average  |
| @ 5997.340               | 34.21                 | 9.03            | 34.40                  | 77.12             | 85.95                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | T102       |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

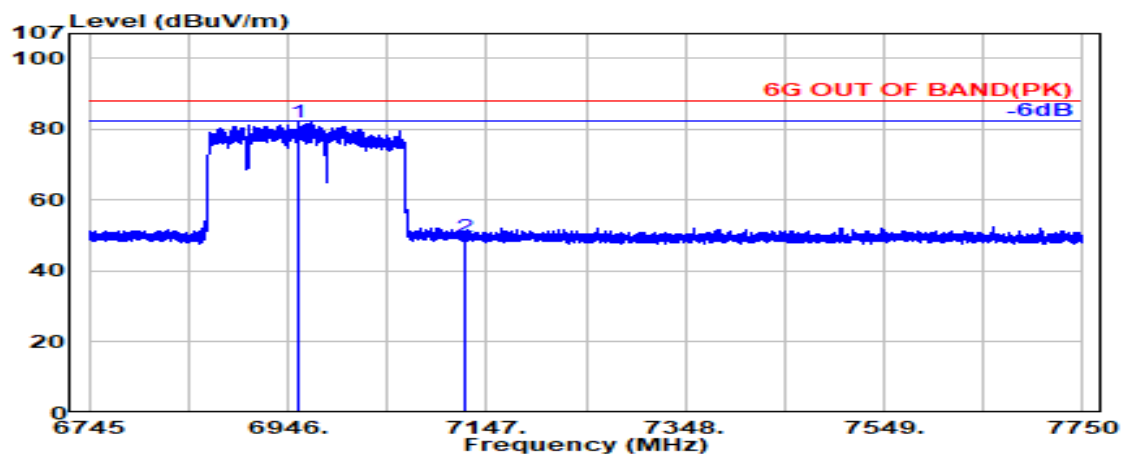

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6957.774               | 35.50                 | 9.69            | 34.38            | 71.24             | 82.06                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.44             | 49.65                   | 88.20           | 38.55       | Peak     |

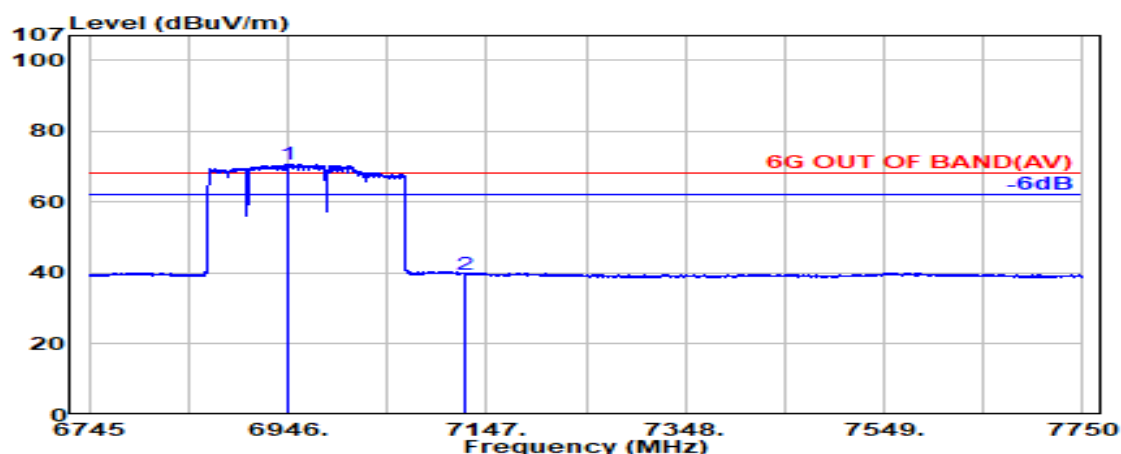

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6946.119               | 35.49                 | 9.69            | 34.37            | 59.89             | 70.70                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.47             | 39.68                   | 68.20           | 28.52       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | T102       |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

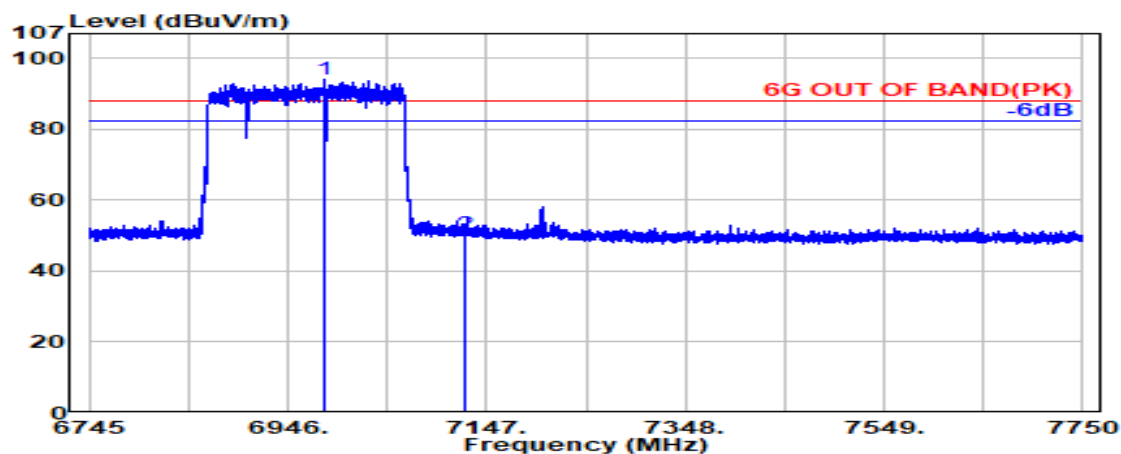

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6981.918               | 35.50                 | 9.71            | 34.39            | 83.17             | 93.98                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.39             | 50.60                   | 88.20           | 37.60       | Peak     |

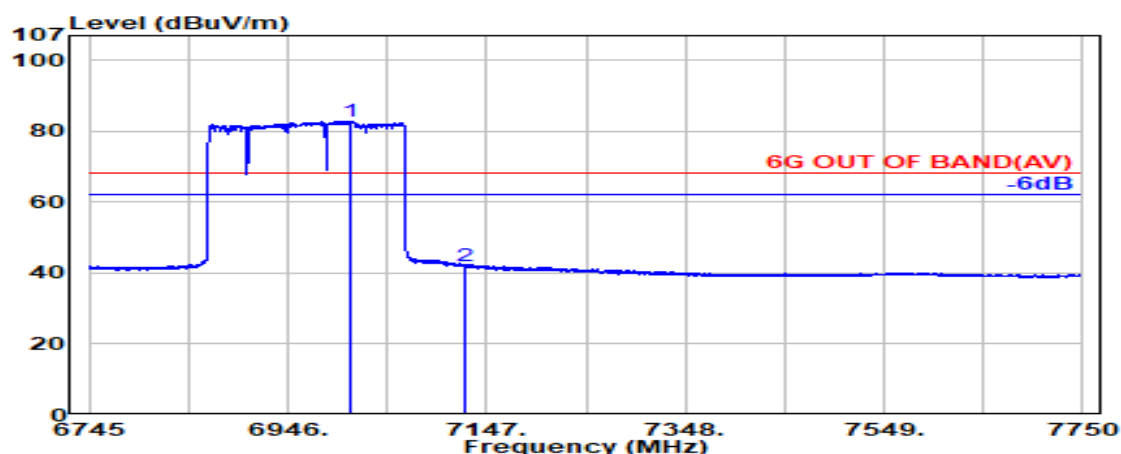

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7009.036               | 35.52                 | 9.73            | 34.41            | 72.14             | 82.97                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 30.98             | 42.19                   | 68.20           | 26.01       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | W104       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

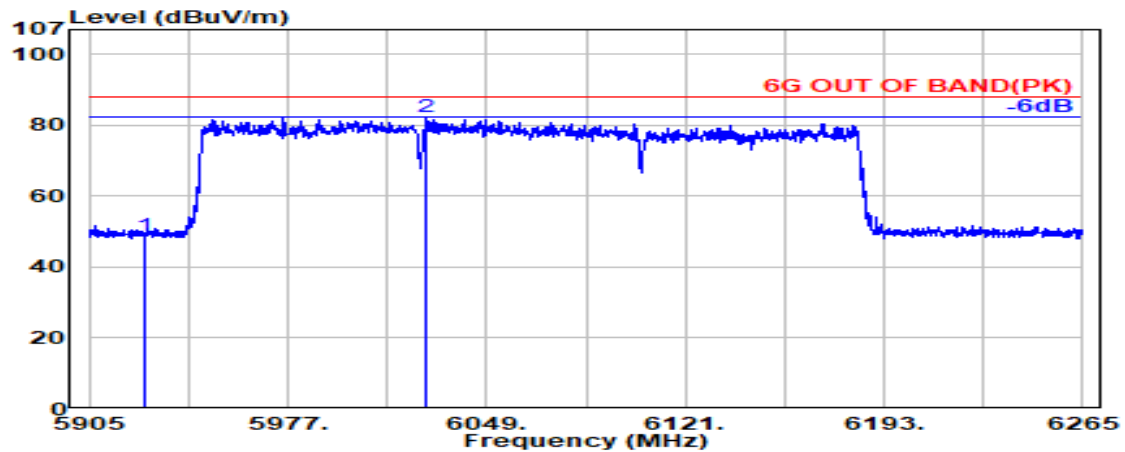

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 39.97             | 48.80                   | 88.20           | 39.40       | Peak     |
| @ 6027.400               | 34.20                 | 9.05            | 34.38            | 73.60             | 82.47                   | ---             | ---         | Peak     |

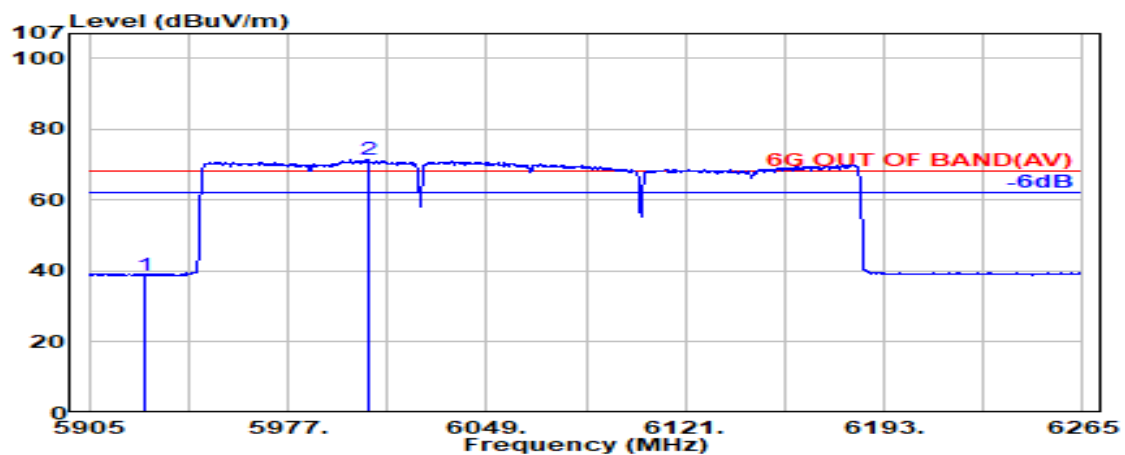

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.07             | 38.89                   | 68.20           | 29.31       | Average  |
| @ 6005.980               | 34.20                 | 9.03            | 34.40            | 62.62             | 71.46                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | W104       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

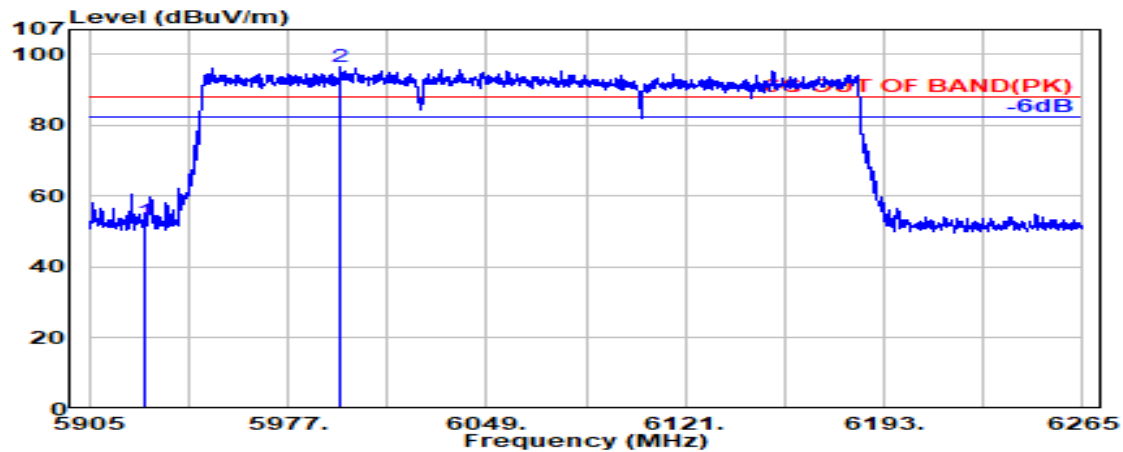

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 44.00             | 52.83                   | 88.20           | 35.37       | Peak     |
| @ 5995.900               | 34.21                 | 9.03            | 34.40            | 87.69             | 96.53                   | ---             | ---         | Peak     |

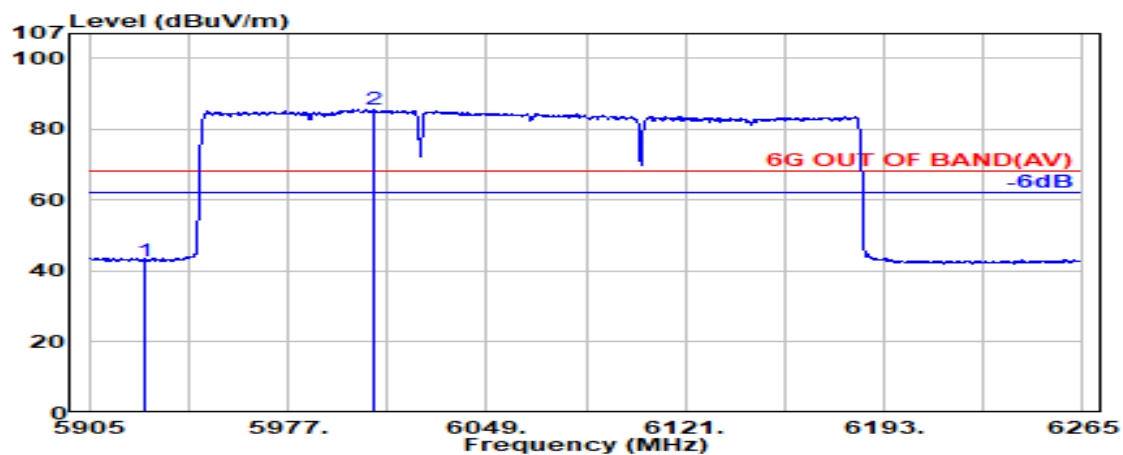


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 34.11             | 42.93                   | 68.20           | 25.27       | Average  |
| @ 6007.780               | 34.20                 | 9.04            | 34.40            | 76.78             | 85.62                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | 104        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

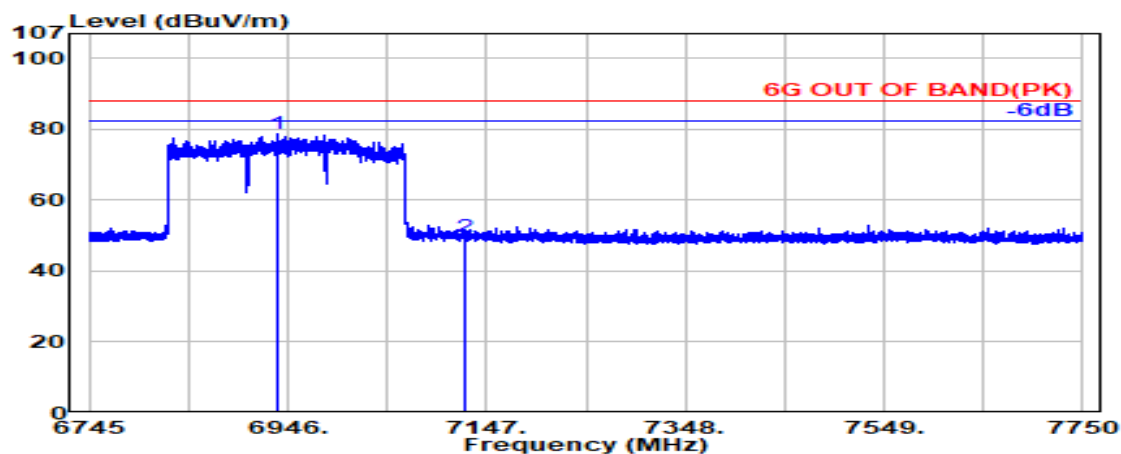

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6935.653               | 35.47                 | 9.68            | 34.36            | 67.91             | 78.70                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.53             | 49.74                   | 88.20           | 38.46       | Peak     |

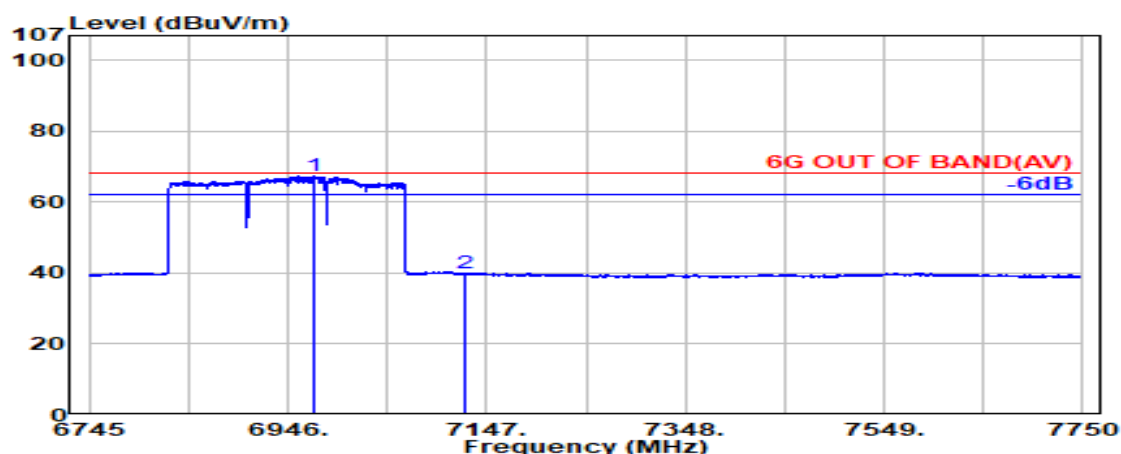

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6972.047               | 35.50                 | 9.70            | 34.38            | 56.79             | 67.61                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.66             | 39.87                   | 68.20           | 28.33       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | 104        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

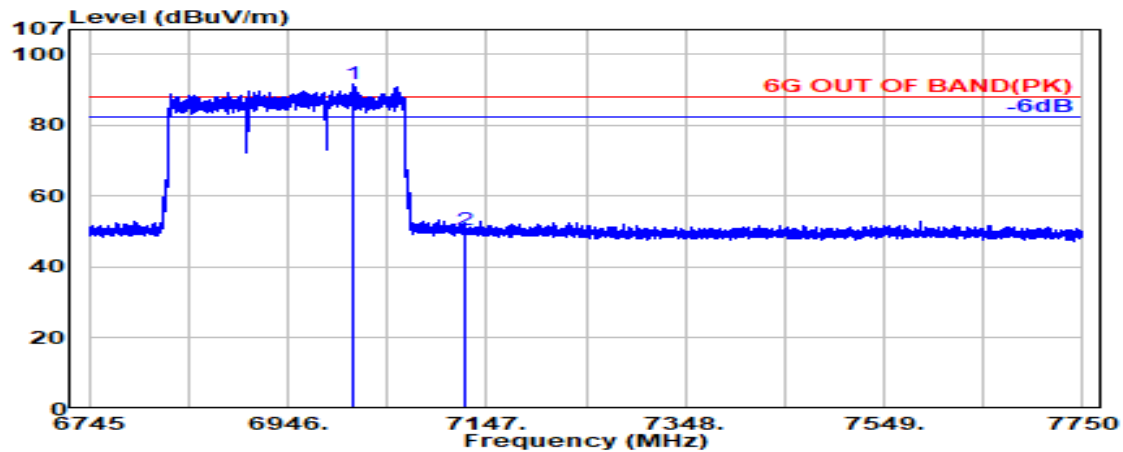

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7013.079               | 35.53                 | 9.73            | 34.41            | 80.91             | 91.75                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.14             | 50.35                   | 88.20           | 37.85       | Peak     |

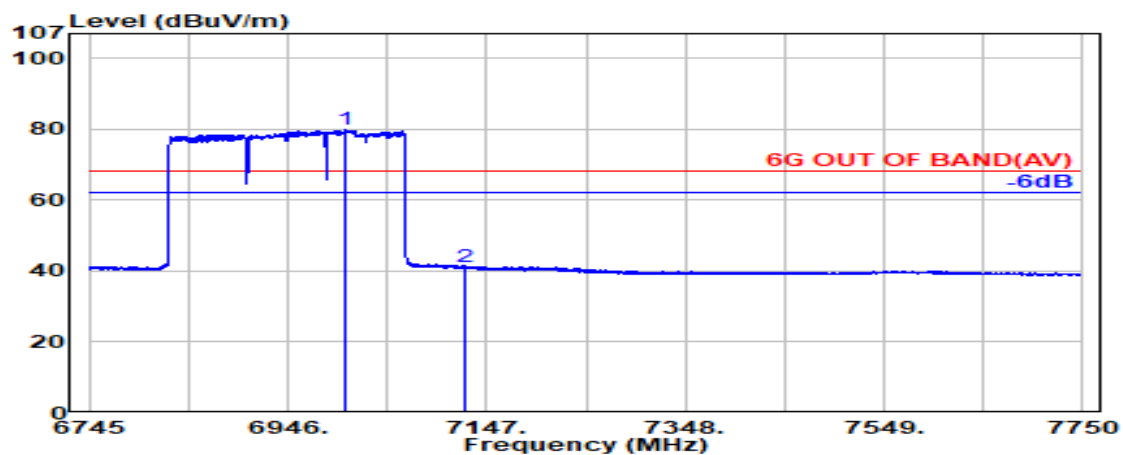

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7004.397               | 35.51                 | 9.72            | 34.40            | 68.95             | 79.78                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 29.85             | 41.06                   | 68.20           | 27.14       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | W106       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

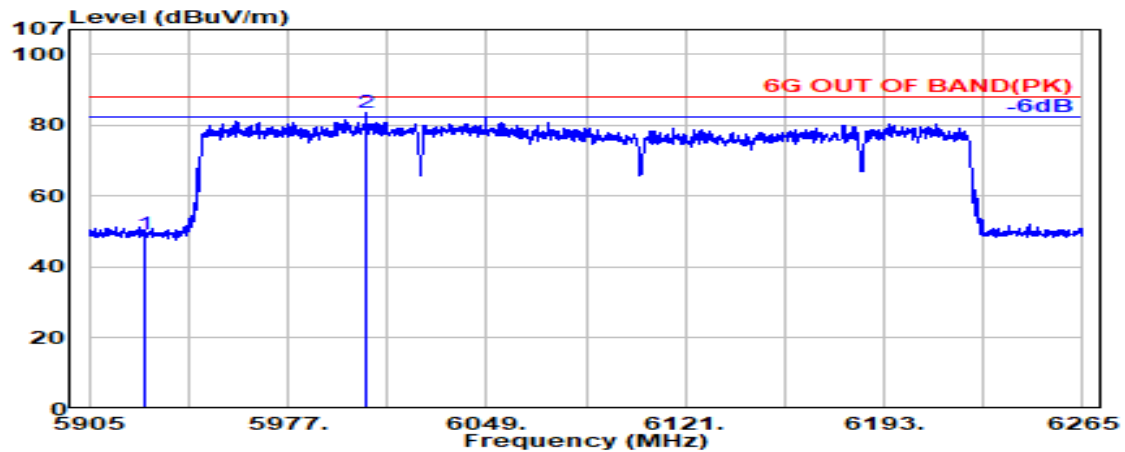

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.62             | 49.44                   | 88.20           | 38.76       | Peak     |
| @ 6005.440               | 34.20                 | 9.03            | 34.40            | 74.79             | 83.62                   | ---             | ---         | Peak     |

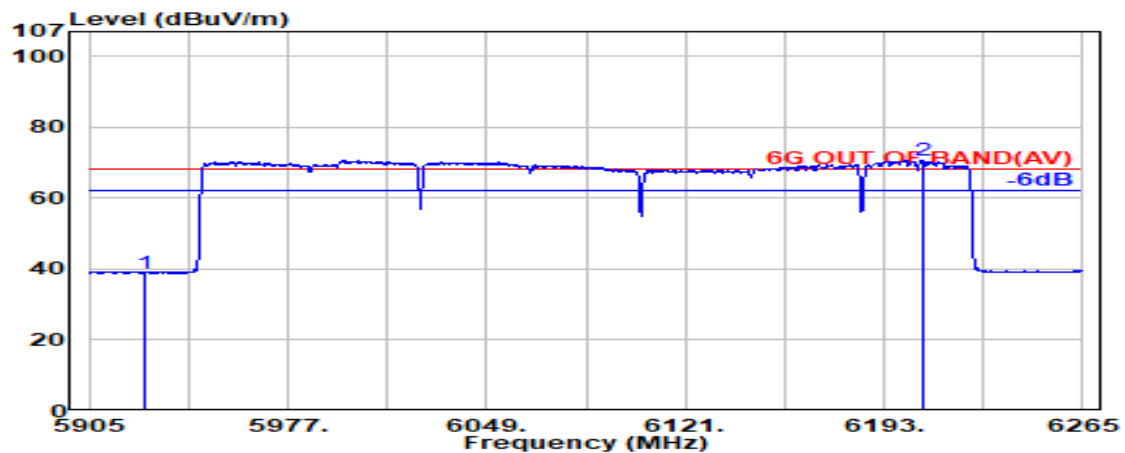

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.08             | 38.90                   | 68.20           | 29.30       | Average  |
| @ 6207.400               | 34.61                 | 9.18            | 34.27            | 61.17             | 70.70                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | W106       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

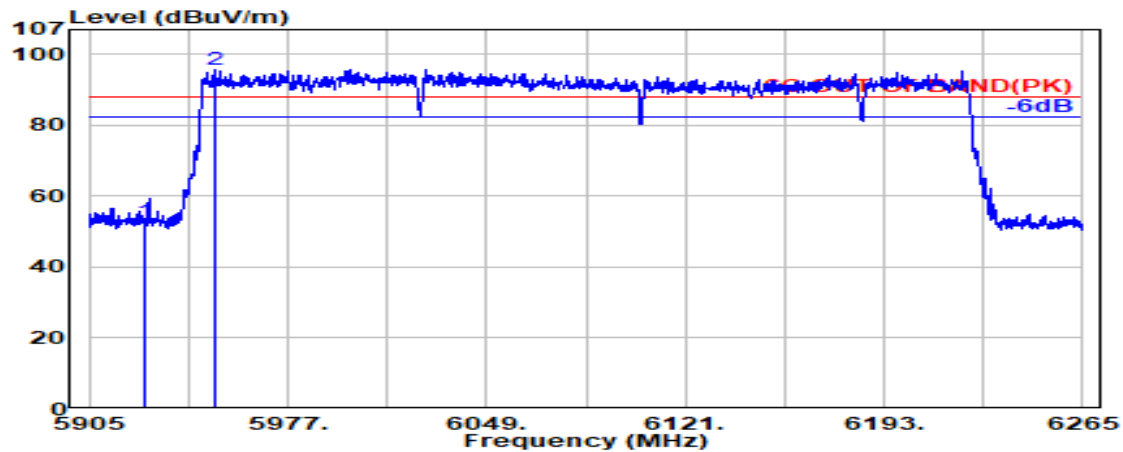

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.92             | 52.74                   | 88.20           | 35.46       | Peak     |
| @ 5950.720               | 34.30                 | 9.00            | 34.38                  | 86.90             | 95.83                   | ---             | ---         | Peak     |

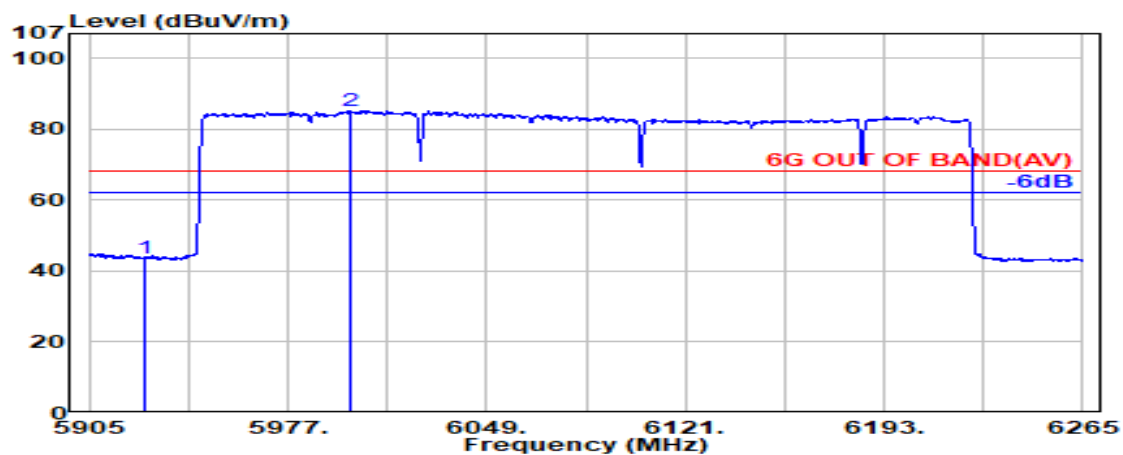

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 34.77             | 43.59                   | 68.20           | 24.61       | Average  |
| @ 5999.860               | 34.20                 | 9.03            | 34.40                  | 76.43             | 85.26                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | 105        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

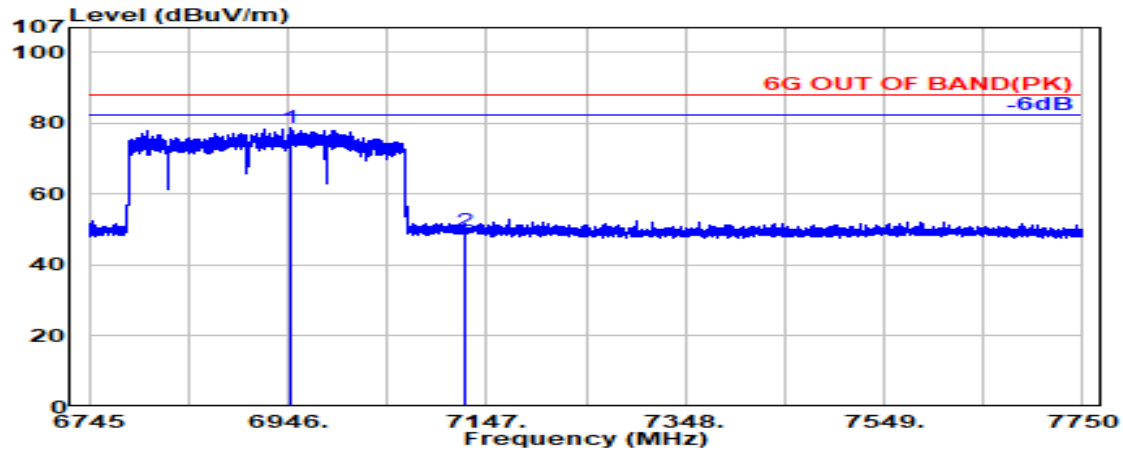

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6947.665               | 35.50                 | 9.69            | 34.37            | 67.78             | 78.59                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.51             | 49.72                   | 88.20           | 38.48       | Peak     |

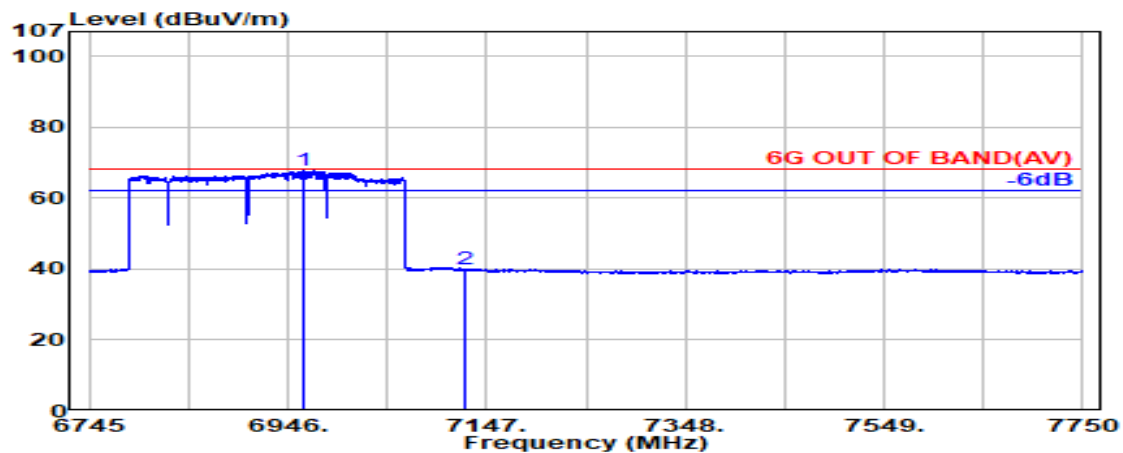

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6961.581               | 35.50                 | 9.70            | 34.38            | 56.88             | 67.70                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.58             | 39.79                   | 68.20           | 28.41       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | 105        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

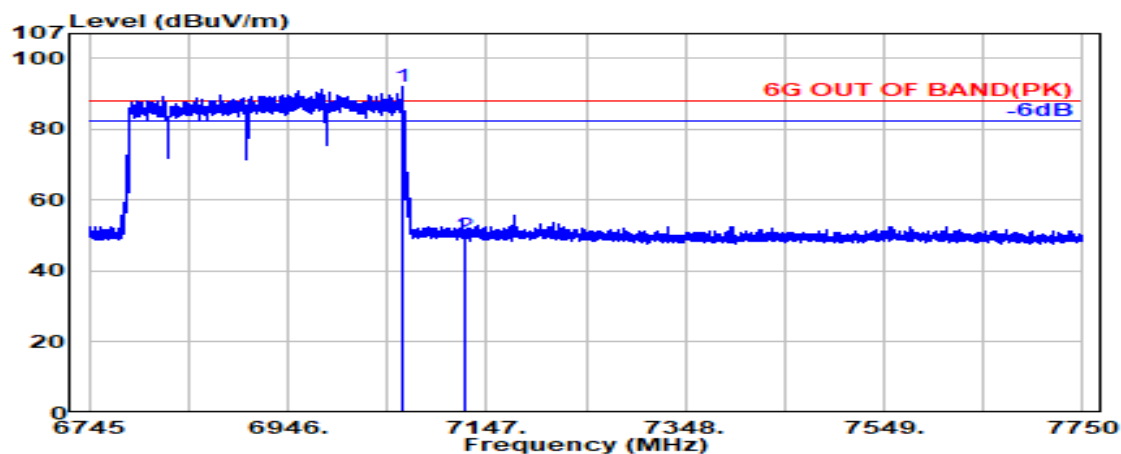

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.248               | 35.65                 | 9.76            | 34.44            | 81.11             | 92.07                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.05             | 50.26                   | 88.20           | 37.94       | Peak     |

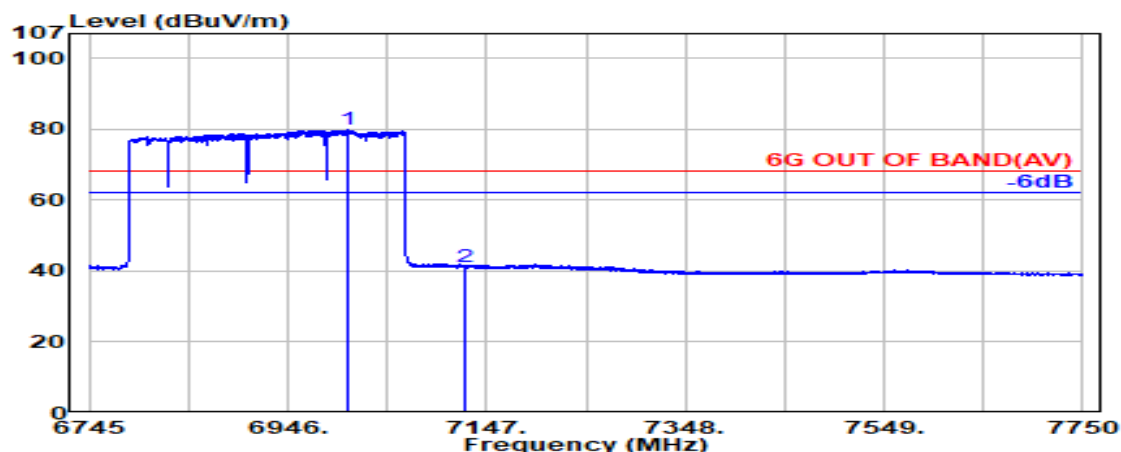

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7006.657               | 35.51                 | 9.72            | 34.40            | 69.14             | 79.97                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 29.95             | 41.16                   | 68.20           | 27.04       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303


Antenna: LUXSHARE-ICT

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

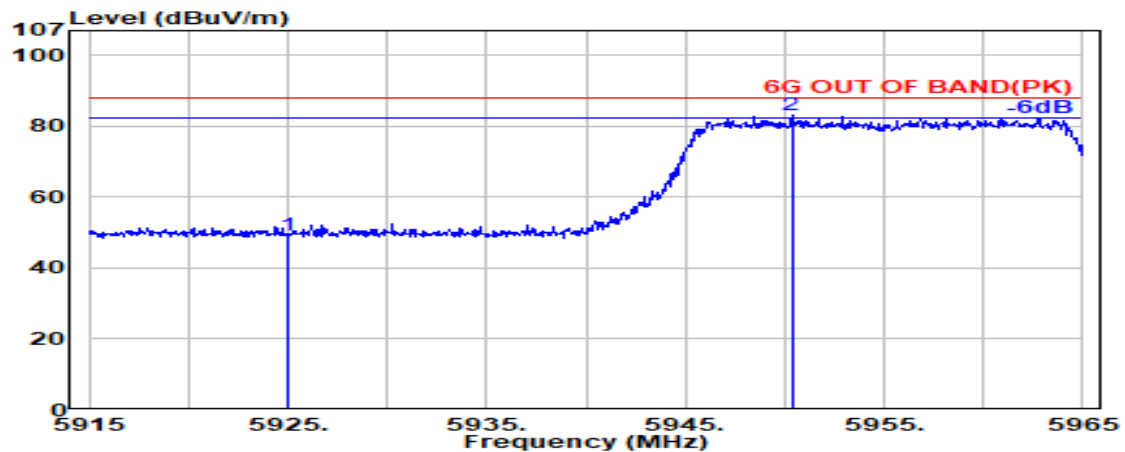

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.40             | 49.23                   | 88.20           | 38.97       | Peak     |
| @ 5950.350               | 34.30                 | 9.00            | 34.38            | 74.18             | 83.10                   | ---             | ---         | Peak     |

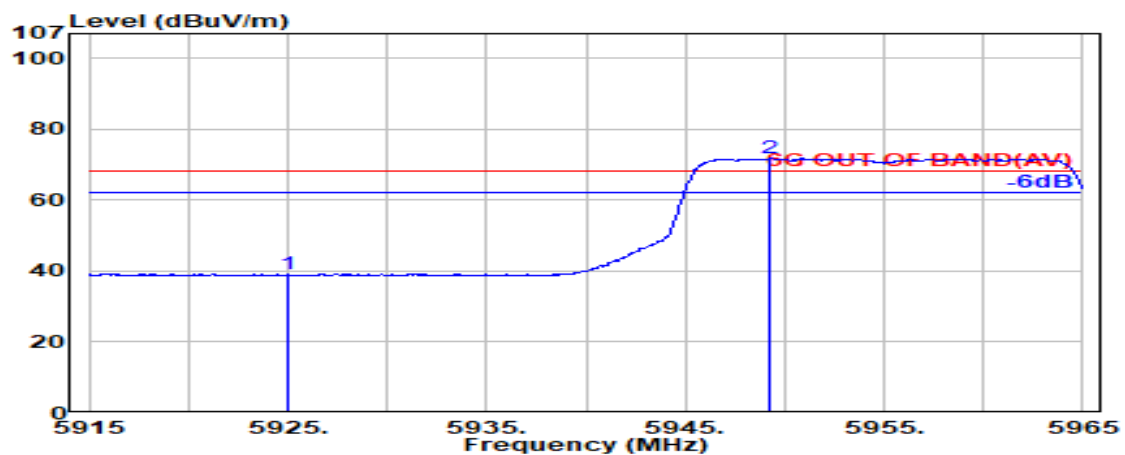

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.24             | 39.07                   | 68.20           | 29.13       | Average  |
| @ 5949.250               | 34.30                 | 9.00            | 34.38            | 62.87             | 71.79                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 5955MHz |

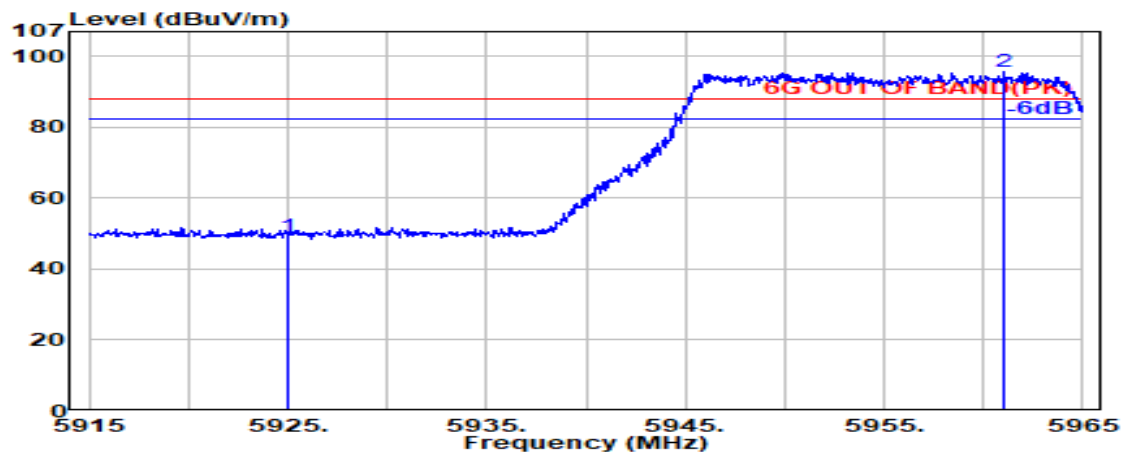

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.45             | 49.27                   | 88.20           | 38.93       | Peak     |
| @ 5961.050               | 34.28                 | 9.01            | 34.38            | 86.89             | 95.80                   | ---             | ---         | Peak     |

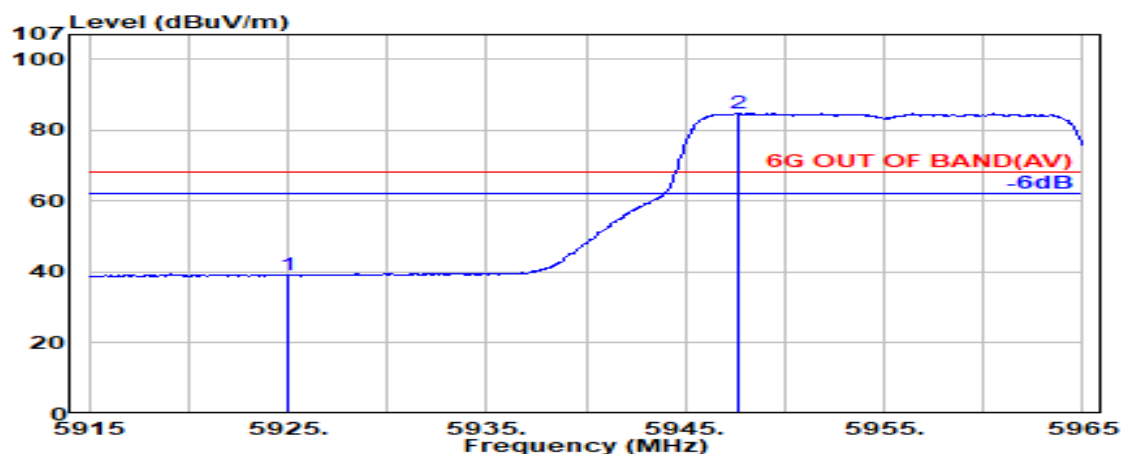

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.31             | 39.13                   | 68.20           | 29.07       | Average  |
| @ 5947.700               | 34.29                 | 9.00            | 34.38            | 75.90             | 84.82                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

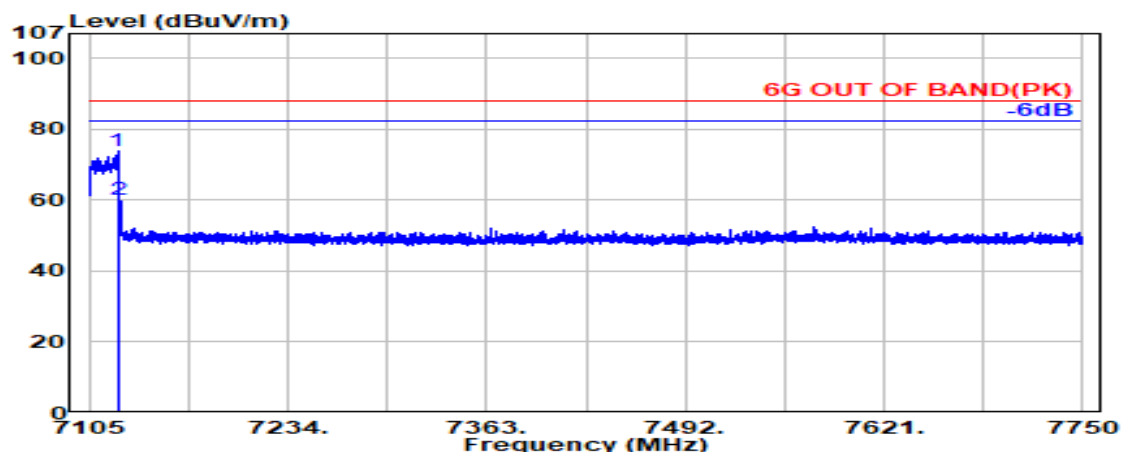

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.400               | 35.89                 | 9.80            | 34.49            | 62.63             | 73.83                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 48.88             | 60.09                   | 88.20           | 28.11       | Peak     |

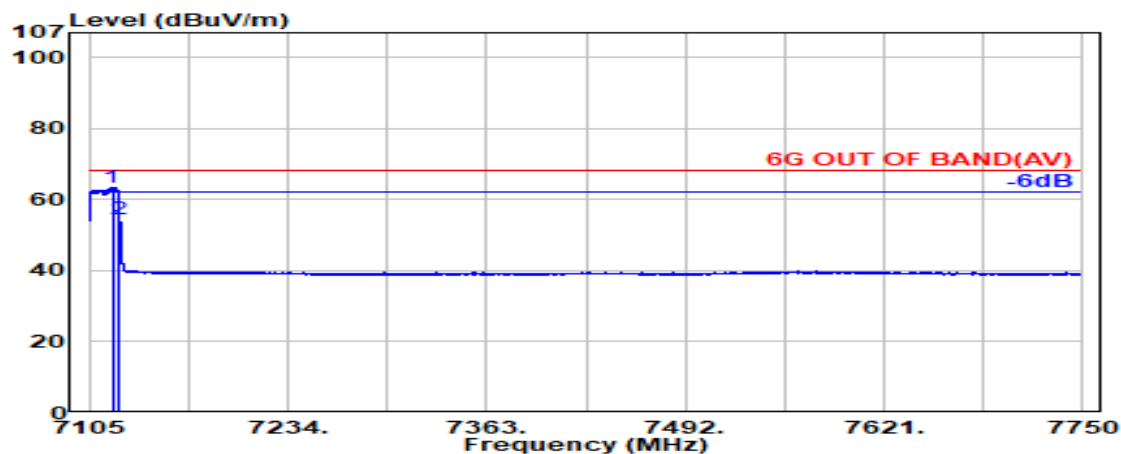

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7120.000               | 35.88                 | 9.80            | 34.49            | 52.17             | 63.36                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 43.34             | 54.55                   | 68.20           | 13.65       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 7115MHz |

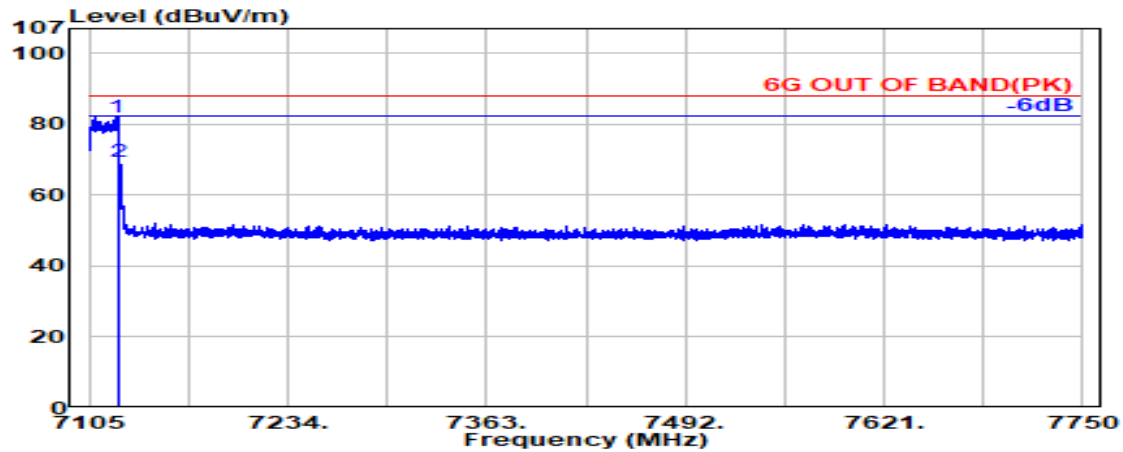

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7123.400               | 35.89                 | 9.80            | 34.49            | 70.80             | 82.01                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 58.30             | 69.51                   | 88.20           | 18.69       | Peak     |

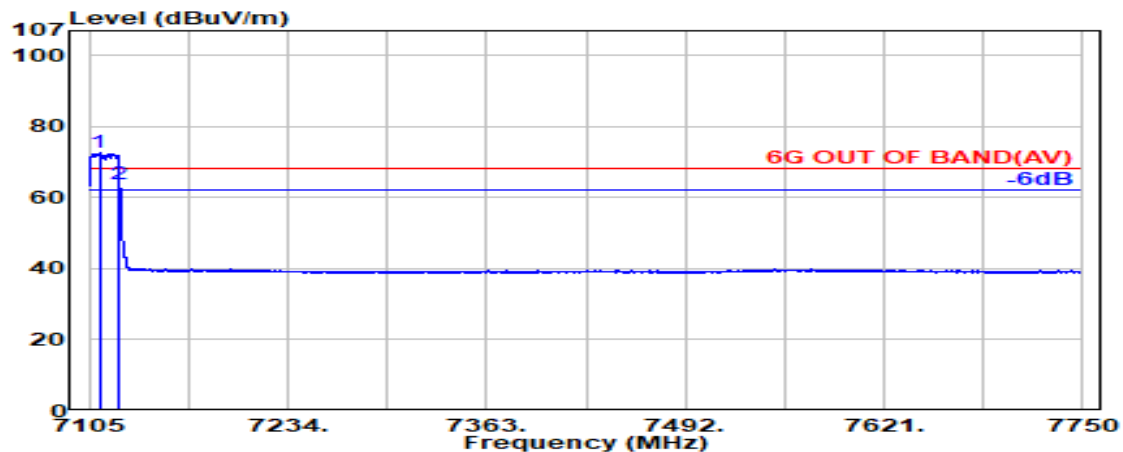

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7111.600               | 35.85                 | 9.79            | 34.48            | 61.37             | 72.53                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 52.71             | 63.92                   | 68.20           | 4.28        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

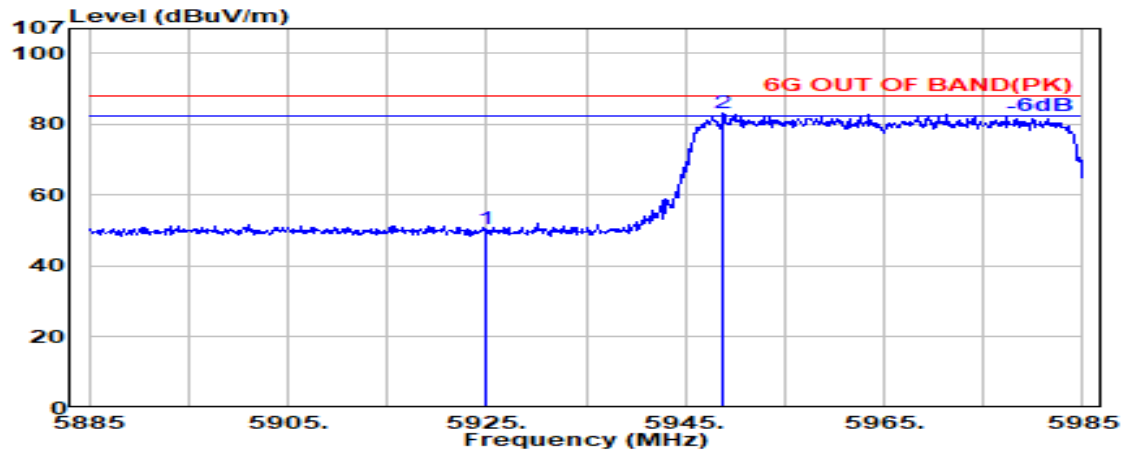

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.47             | 50.30                   | 88.20           | 37.90       | Peak     |
| @ 5948.800               | 34.30                 | 9.00            | 34.38            | 74.09             | 83.01                   | ---             | ---         | Peak     |

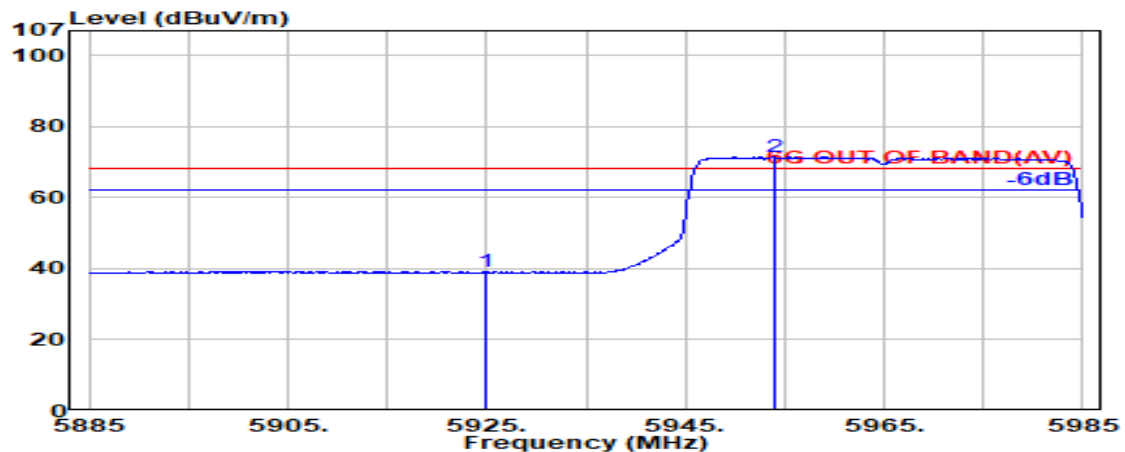

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.30             | 39.12                   | 68.20           | 29.08       | Average  |
| @ 5954.000               | 34.29                 | 9.01            | 34.38            | 62.56             | 71.48                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

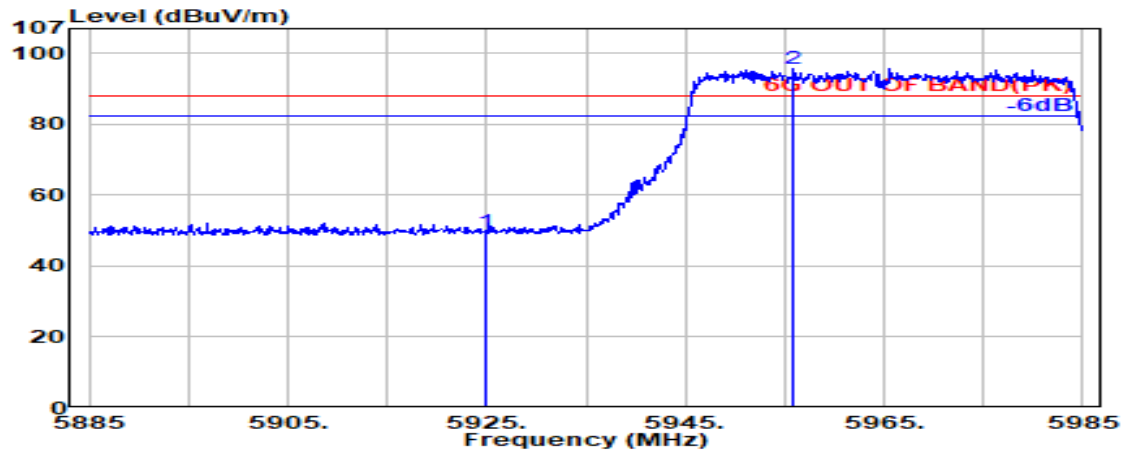

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.00             | 49.82                   | 88.20           | 38.38       | Peak     |
| @ 5955.800               | 34.29                 | 9.01            | 34.38            | 86.86             | 95.78                   | ---             | ---         | Peak     |

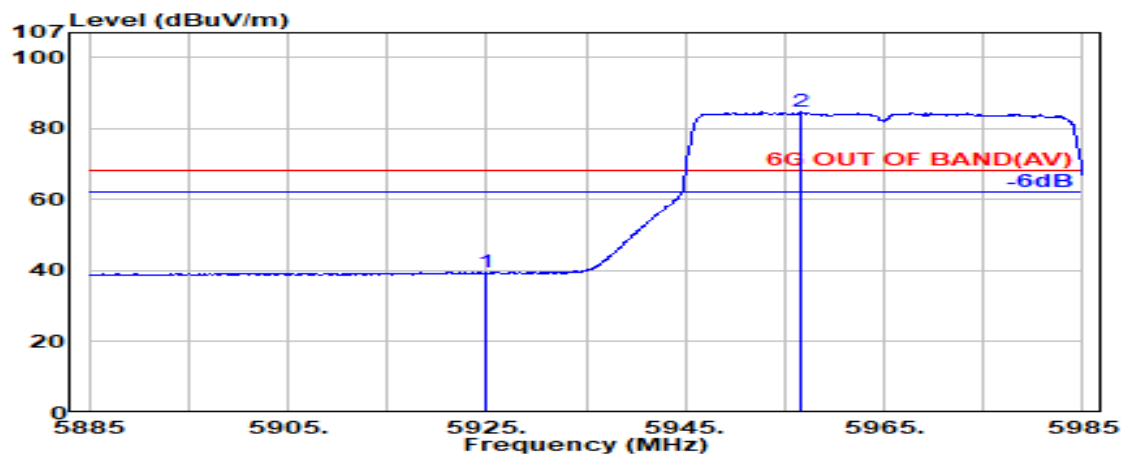

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.55             | 39.38                   | 68.20           | 28.82       | Average  |
| @ 5956.500               | 34.29                 | 9.01            | 34.38            | 75.78             | 84.69                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

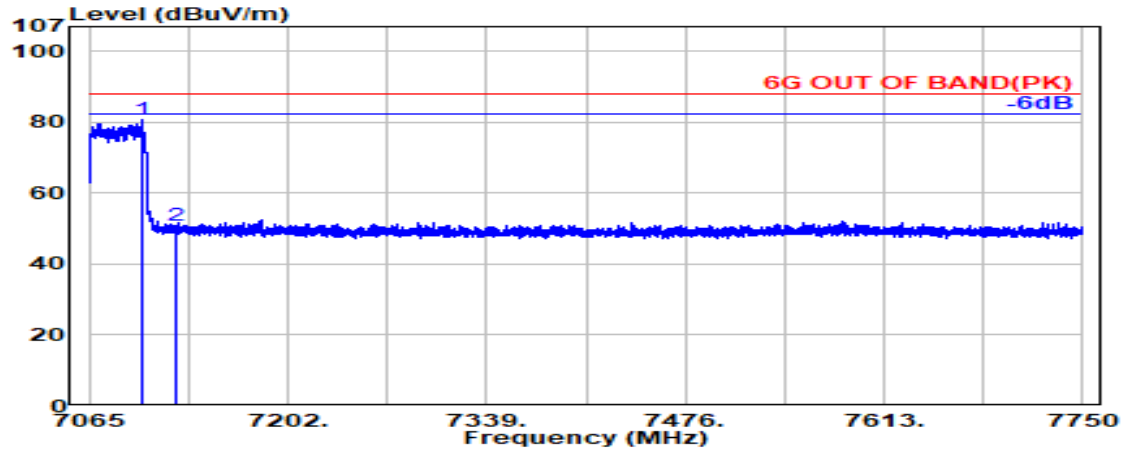

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.400               | 35.81                 | 9.79            | 34.47            | 69.72             | 80.84                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.85             | 51.06                   | 88.20           | 37.14       | Peak     |

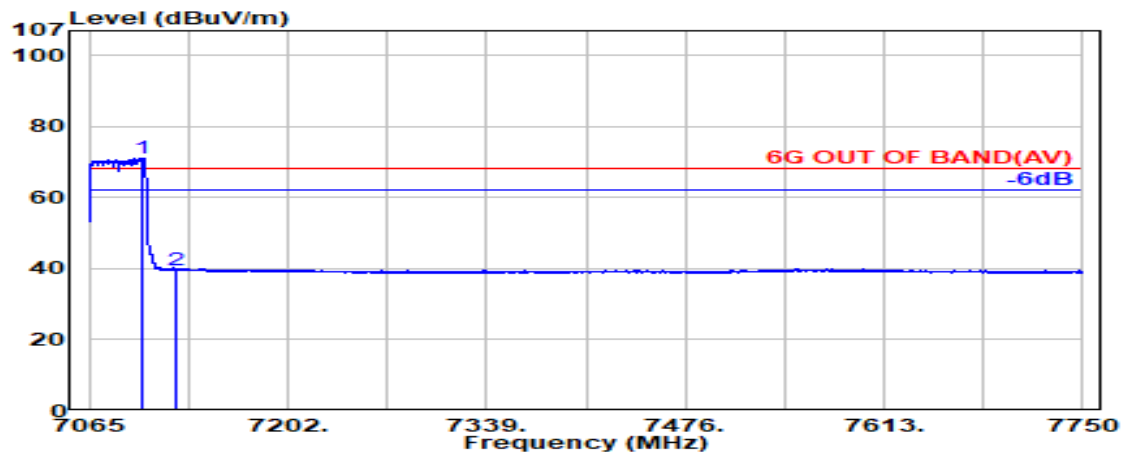

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.300               | 35.81                 | 9.79            | 34.47            | 60.08             | 71.20                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.51             | 39.72                   | 68.20           | 28.48       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7085MHz |

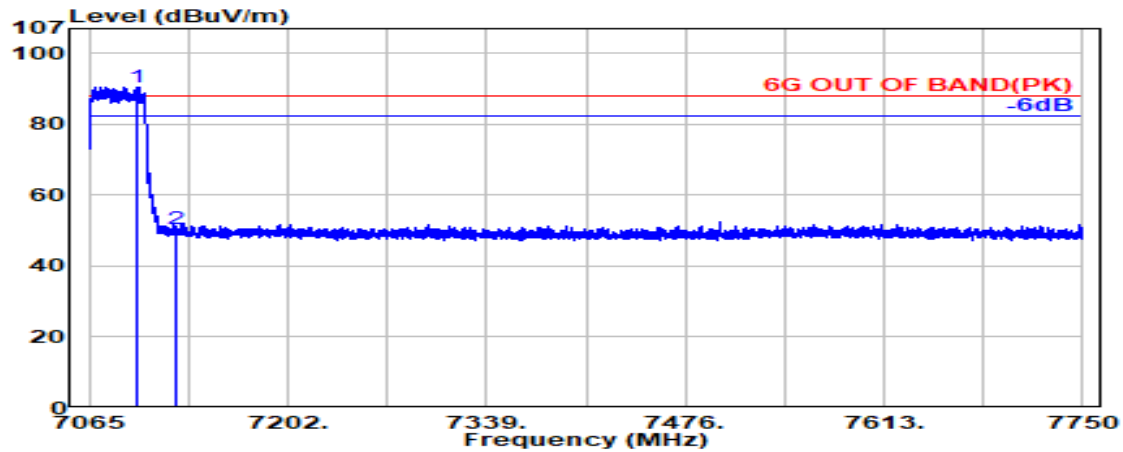

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7098.800               | 35.80                 | 9.78            | 34.47            | 79.53             | 90.64                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.13             | 50.35                   | 88.20           | 37.85       | Peak     |

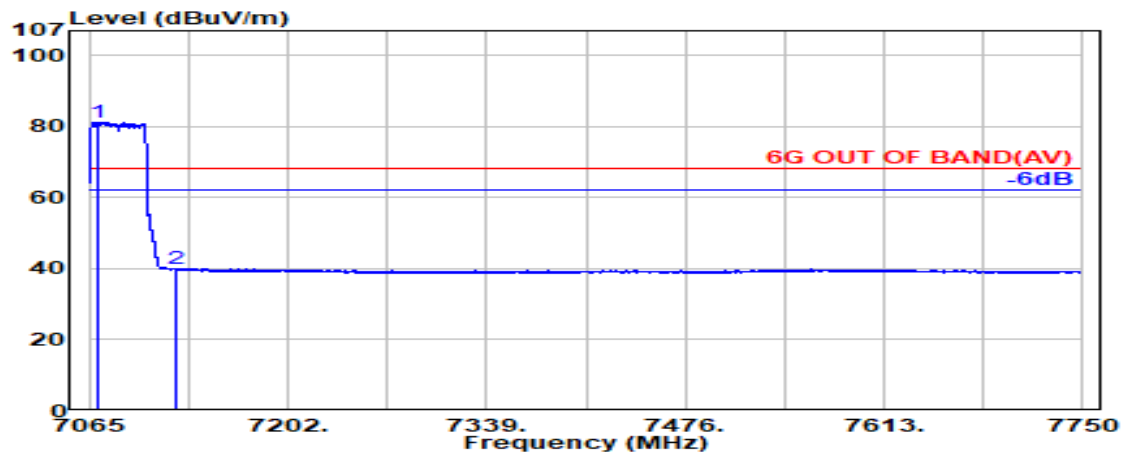

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7071.900               | 35.69                 | 9.77            | 34.45            | 70.21             | 81.22                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.63             | 39.84                   | 68.20           | 28.36       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

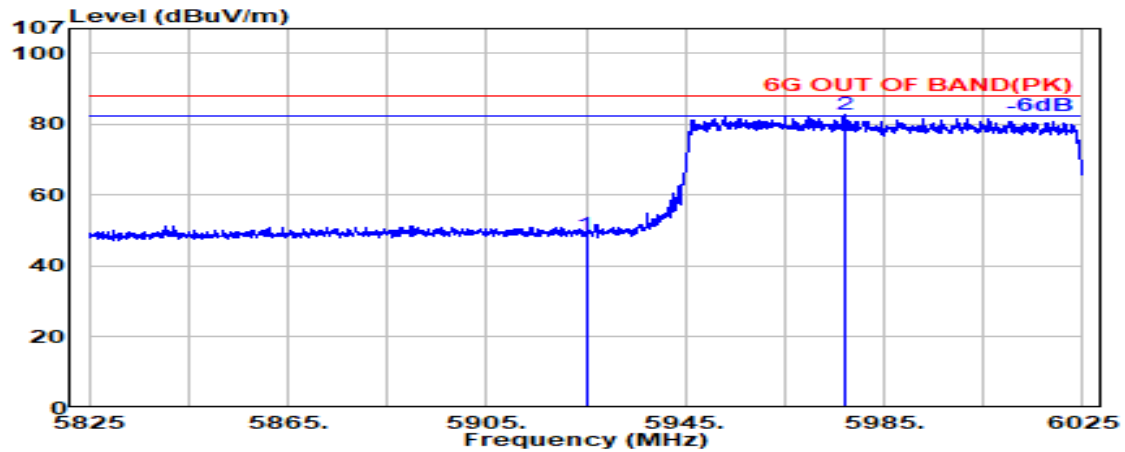

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.03             | 48.85                   | 88.20           | 39.35       | Peak     |
| @ 5976.900               | 34.25                 | 9.02            | 34.39            | 73.85             | 82.72                   | ---             | ---         | Peak     |

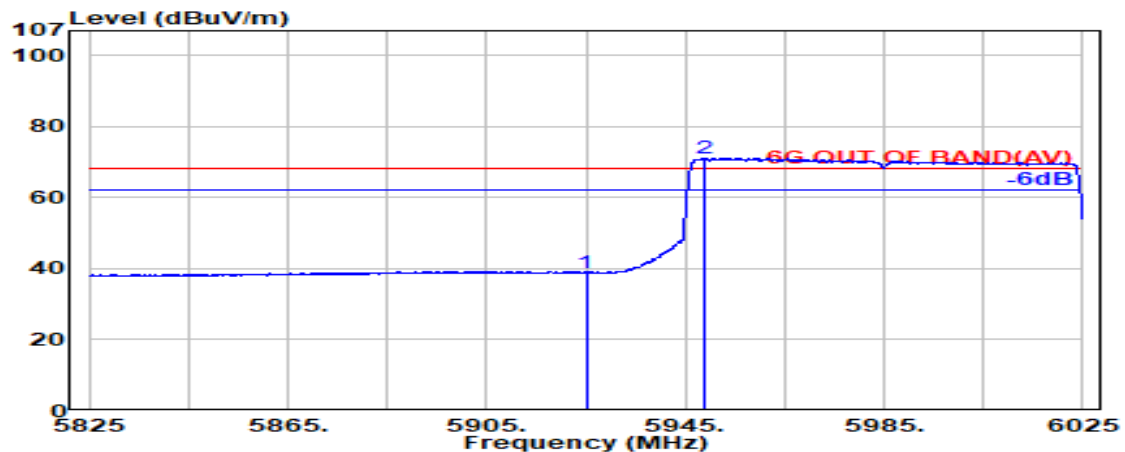

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.02             | 38.84                   | 68.20           | 29.36       | Average  |
| @ 5948.800               | 34.30                 | 9.00            | 34.38            | 62.15             | 71.07                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

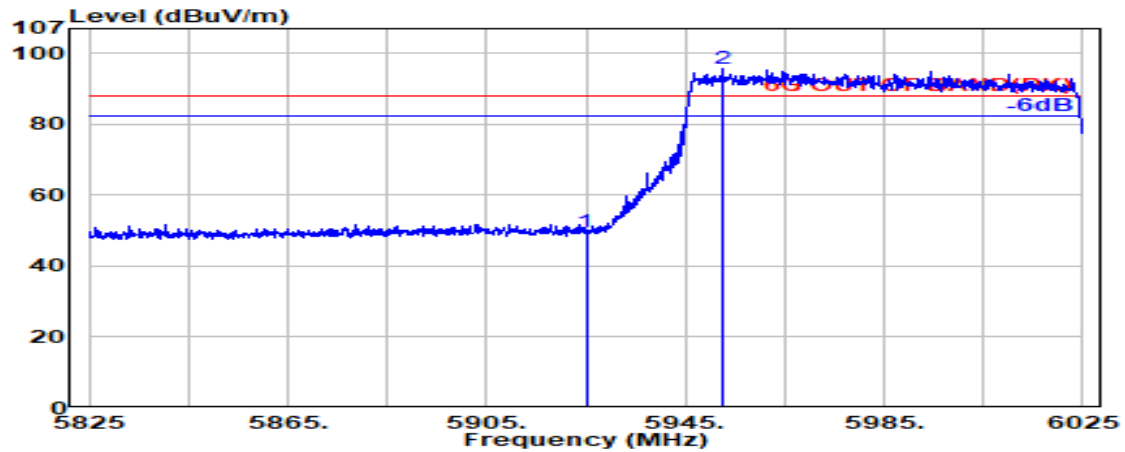

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.76             | 49.58                   | 88.20           | 38.62       | Peak     |
| @ 5952.600               | 34.29                 | 9.00            | 34.38                  | 86.57             | 95.49                   | ---             | ---         | Peak     |

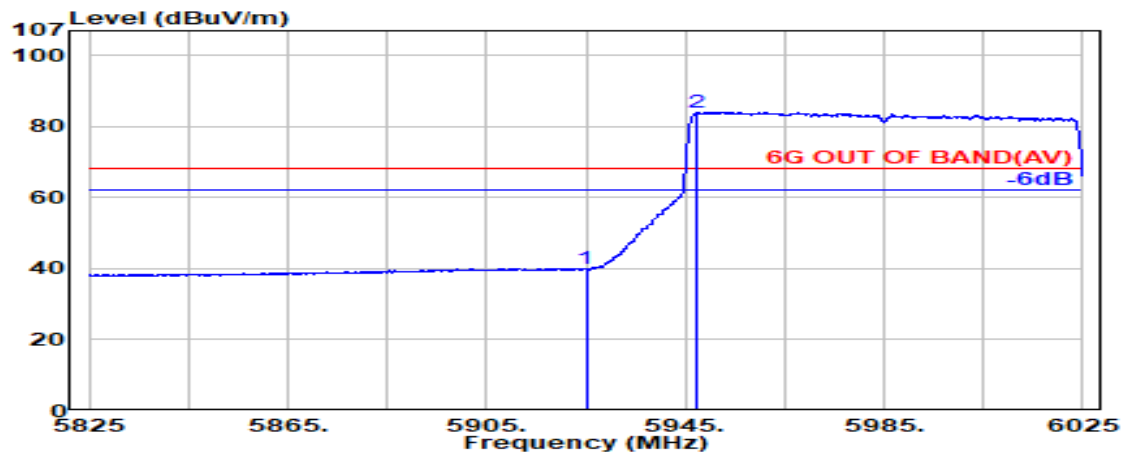

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.99             | 39.81                   | 68.20           | 28.39       | Average  |
| @ 5947.400               | 34.29                 | 9.00            | 34.38                  | 75.16             | 84.08                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

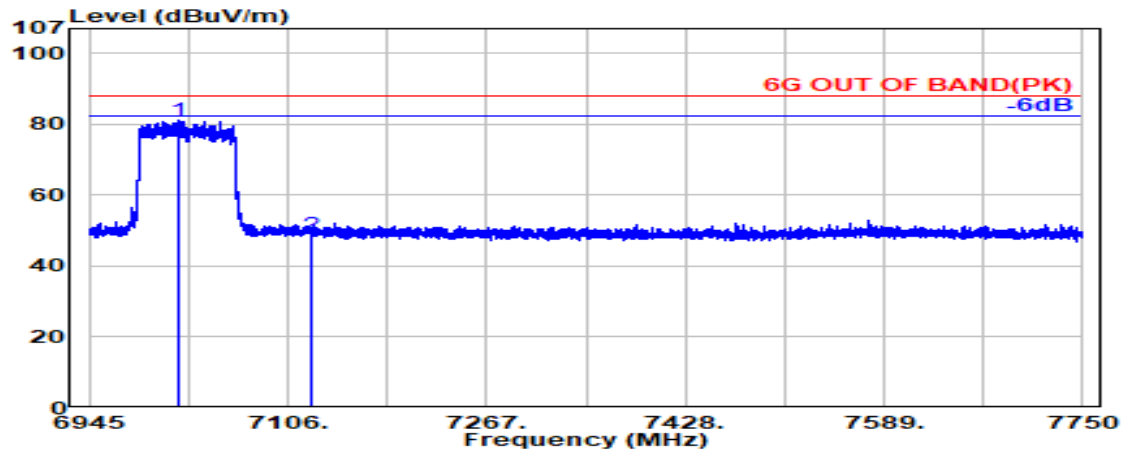

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7017.700               | 35.54                 | 9.73            | 34.41                  | 70.29             | 81.15                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 37.81             | 49.02                   | 88.20           | 39.18       | Peak     |

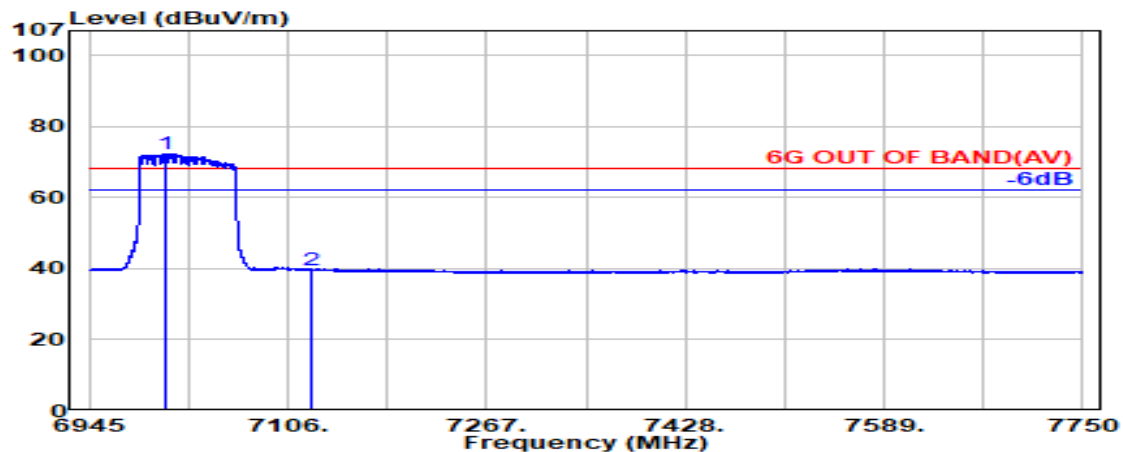

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7007.300               | 35.51                 | 9.72            | 34.41                  | 61.50             | 72.33                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.37             | 39.59                   | 68.20           | 28.61       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

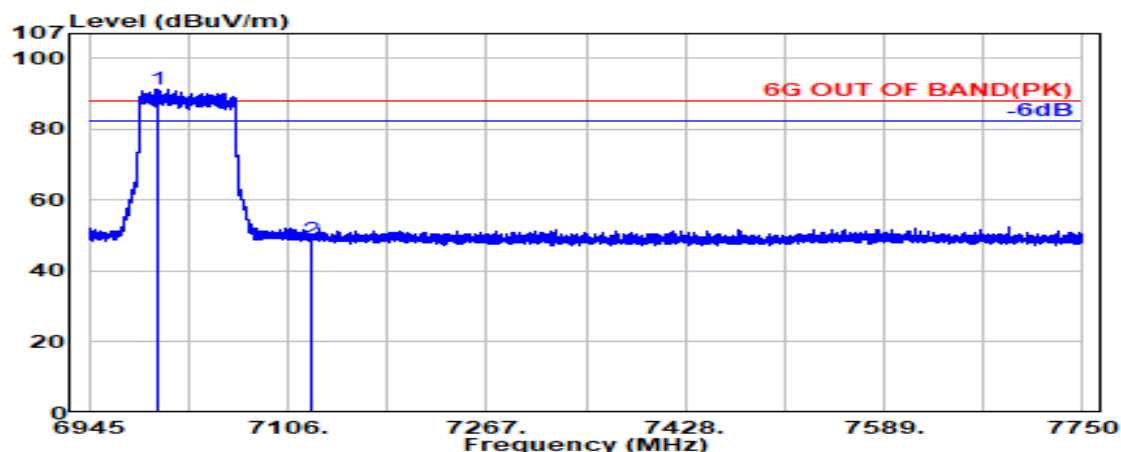

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7000.500               | 35.50                 | 9.72            | 34.40            | 80.41             | 91.23                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 37.53             | 48.74                   | 88.20           | 39.46       | Peak     |

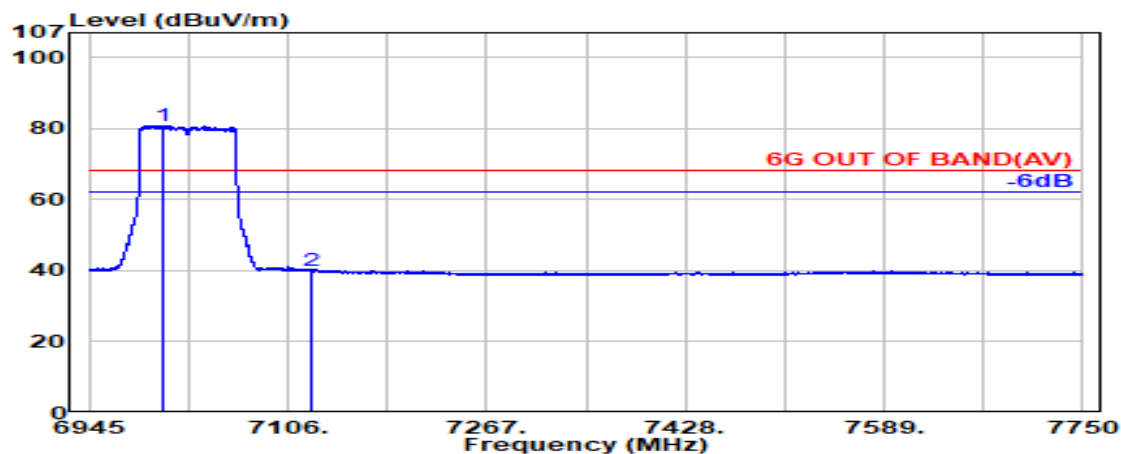

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7005.800               | 35.51                 | 9.72            | 34.40            | 70.04             | 80.87                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.62             | 39.83                   | 68.20           | 28.37       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

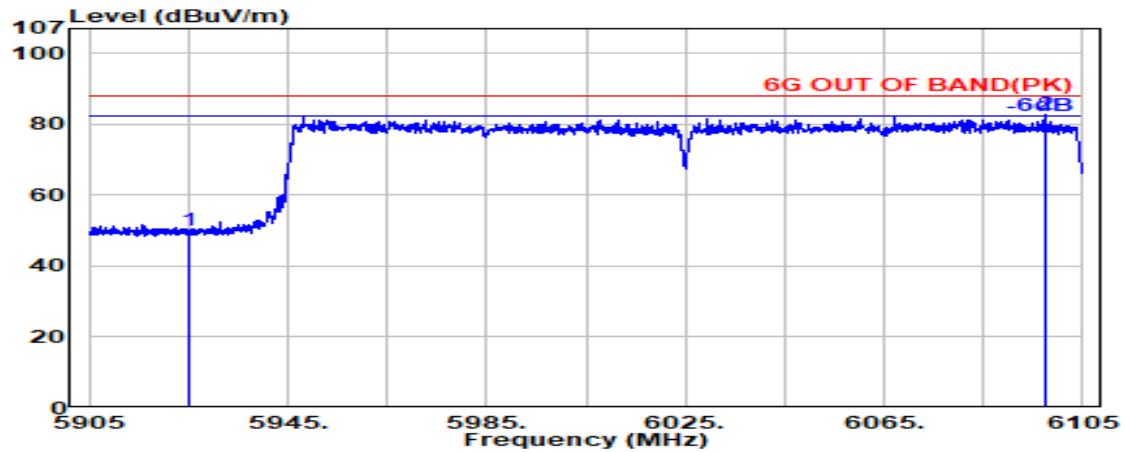

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.32             | 50.14                   | 88.20           | 38.06       | Peak     |
| @ 6097.400               | 34.29                 | 9.10            | 34.34            | 73.80             | 82.86                   | ---             | ---         | Peak     |

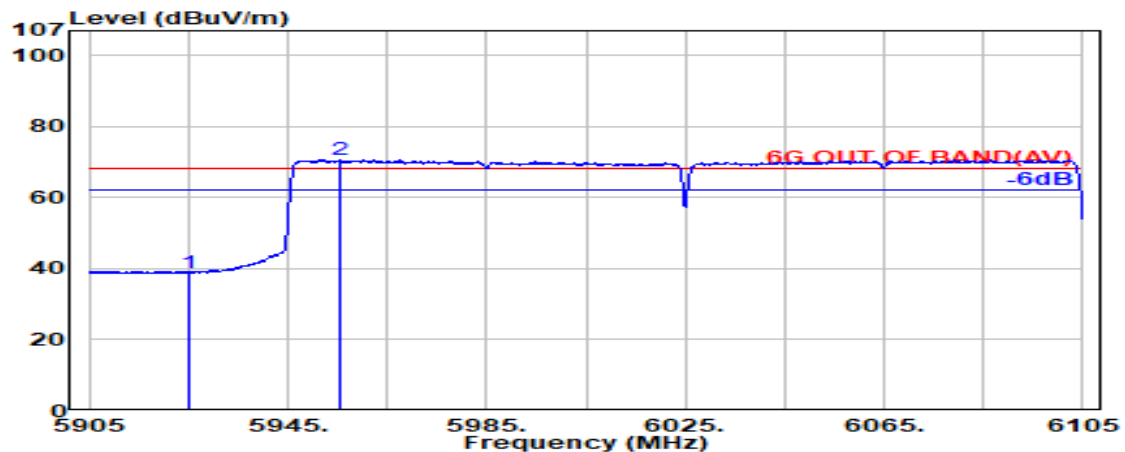

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.08             | 38.90                   | 68.20           | 29.30       | Average  |
| @ 5955.700               | 34.29                 | 9.01            | 34.38            | 61.75             | 70.67                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

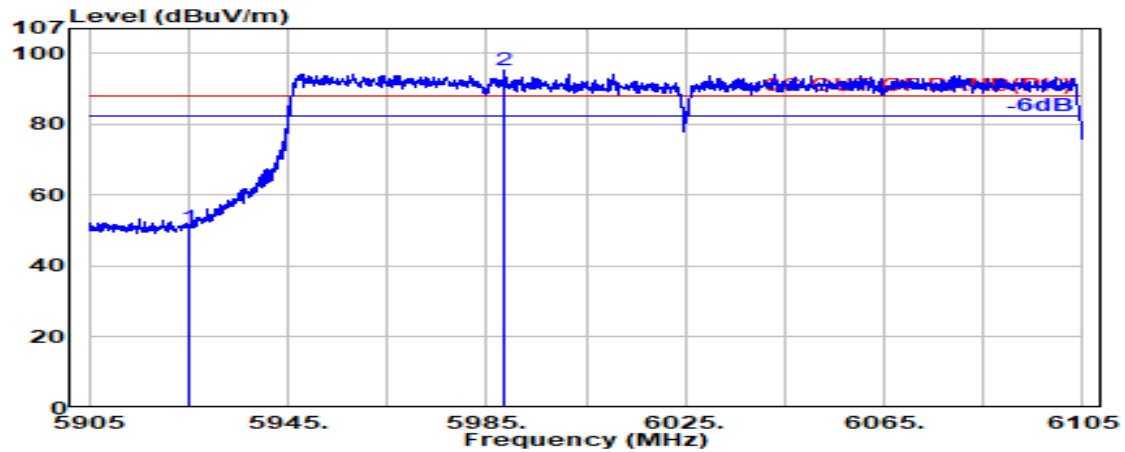

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.22             | 51.04                   | 88.20           | 37.16       | Peak     |
| @ 5988.600               | 34.22                 | 9.02            | 34.39                  | 86.34             | 95.19                   | ---             | ---         | Peak     |

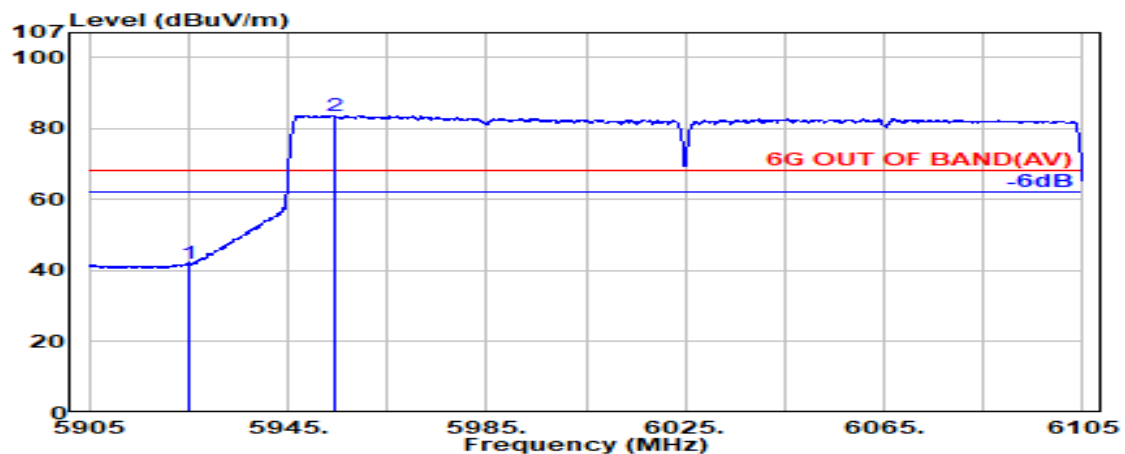

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 33.08             | 41.91                   | 68.20           | 26.29       | Average  |
| @ 5954.400               | 34.29                 | 9.01            | 34.38                  | 74.85             | 83.77                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

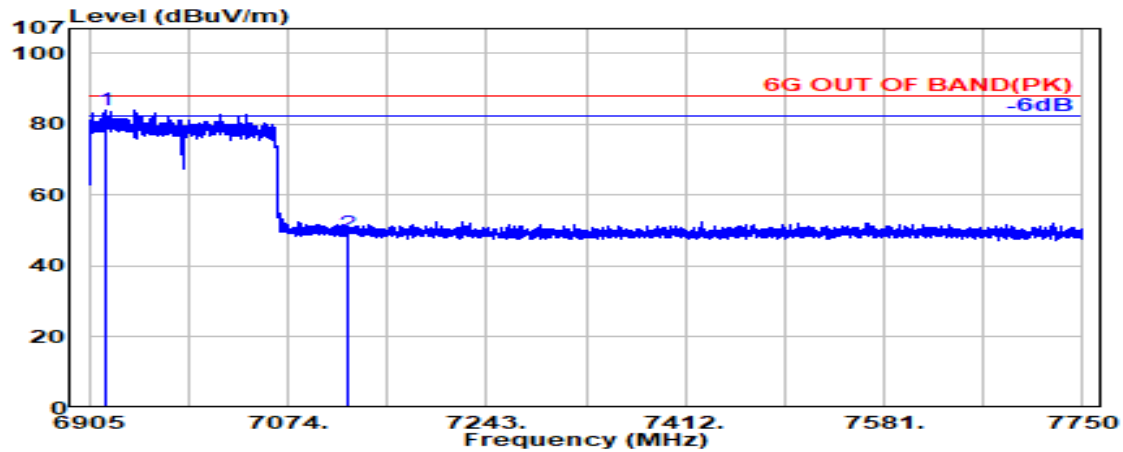

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6918.100               | 35.44                 | 9.67            | 34.35                  | 73.42             | 84.18                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.06             | 49.27                   | 88.20           | 38.93       | Peak     |

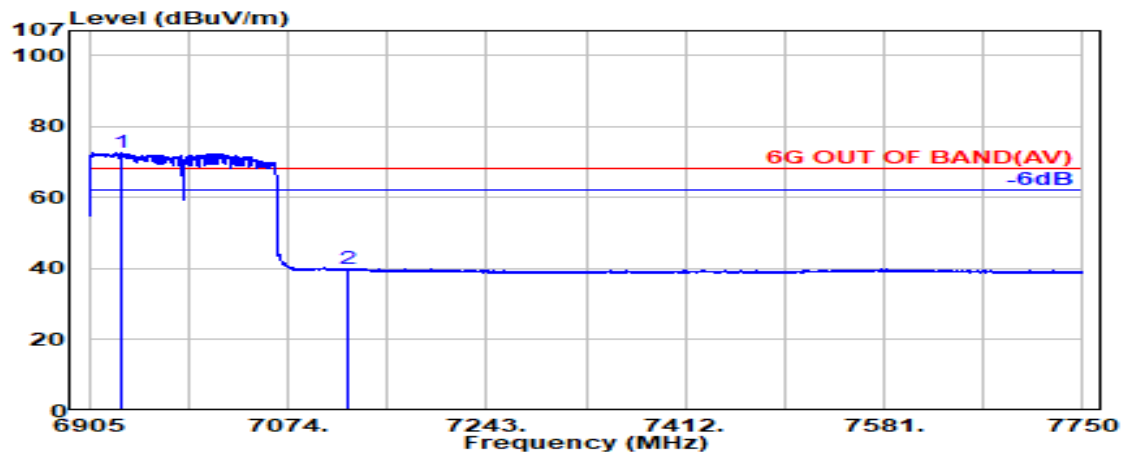

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6932.500               | 35.47                 | 9.68            | 34.36                  | 61.75             | 72.53                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.76             | 39.97                   | 68.20           | 28.23       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

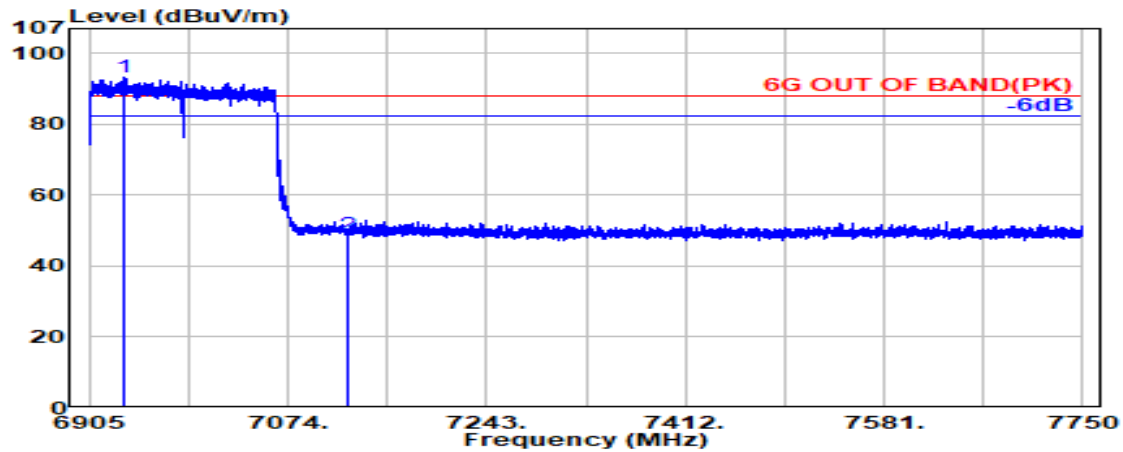

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6935.600               | 35.47                 | 9.68            | 34.36            | 82.64             | 93.43                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 37.78             | 48.99                   | 88.20           | 39.21       | Peak     |

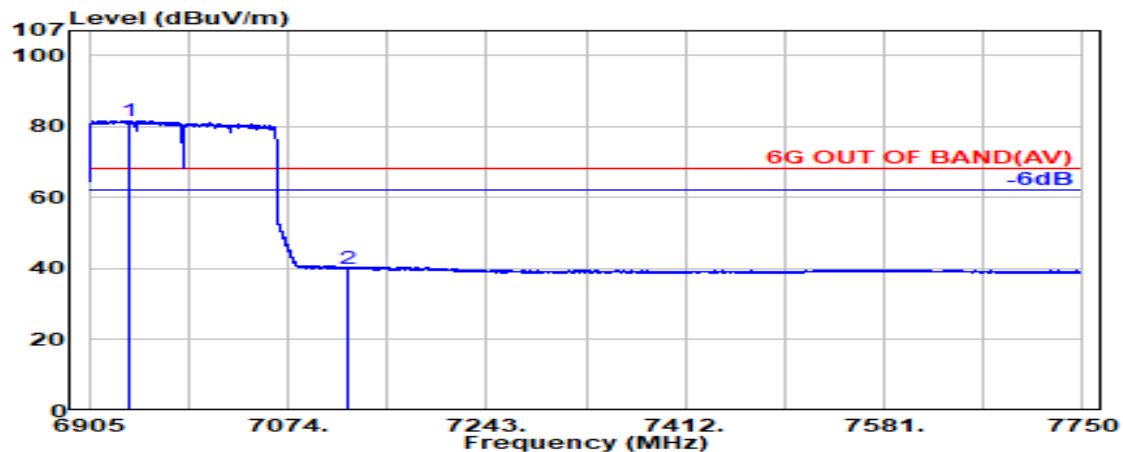

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6940.100               | 35.48                 | 9.68            | 34.37            | 70.83             | 81.62                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.88             | 40.09                   | 68.20           | 28.11       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 5          |
|      |                | Frequency  | TX 5955MHz |

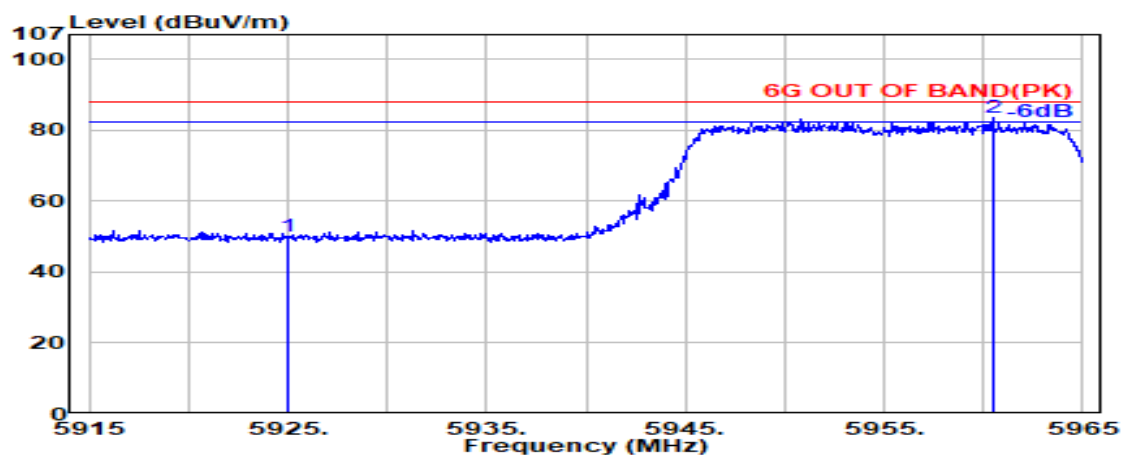

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.28             | 50.10                   | 88.20           | 38.10       | Peak     |
| @ 5960.450               | 34.28                 | 9.01            | 34.38            | 74.50             | 83.41                   | ---             | ---         | Peak     |

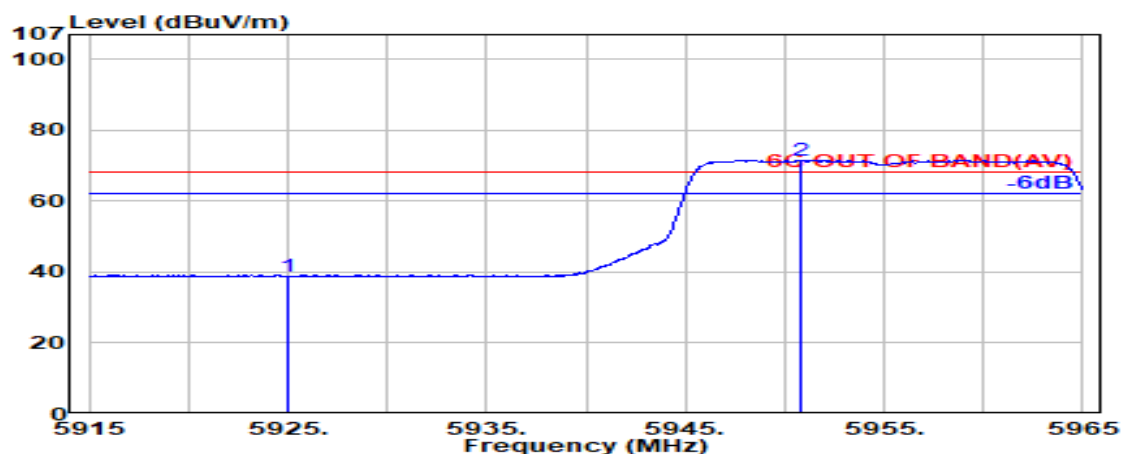

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.07             | 38.90                   | 68.20           | 29.30       | Average  |
| @ 5950.850               | 34.30                 | 9.00            | 34.38            | 62.65             | 71.58                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 5          |
|      |                | Frequency  | TX 5955MHz |

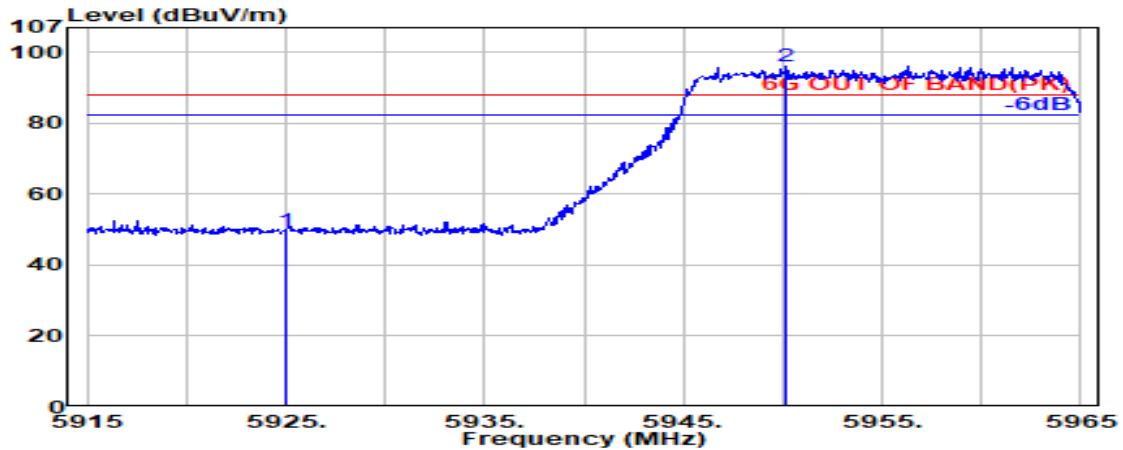

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.93             | 49.76                   | 88.20           | 38.44       | Peak     |
| @ 5950.150               | 34.30                 | 9.00            | 34.38            | 87.25             | 96.18                   | ---             | ---         | Peak     |

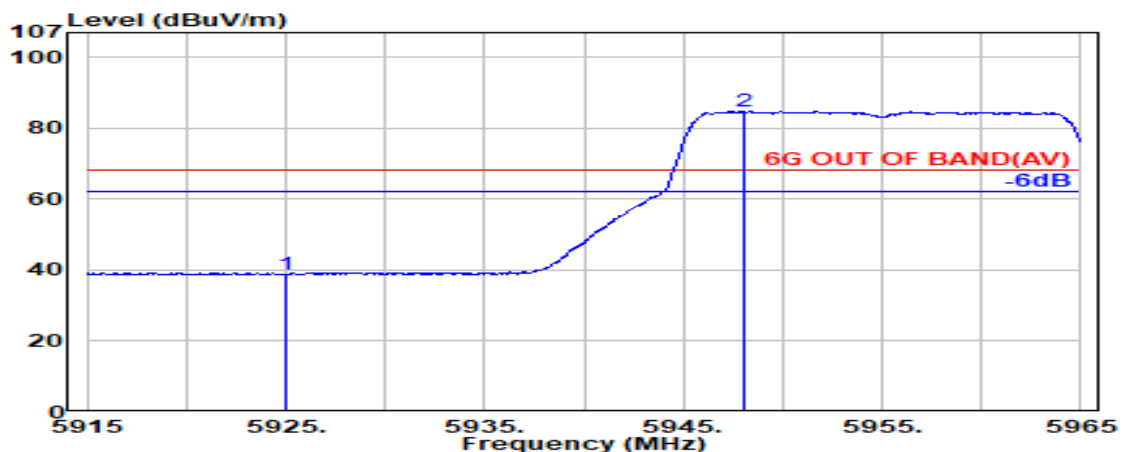

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.11             | 38.93                   | 68.20           | 29.27       | Average  |
| @ 5948.000               | 34.29                 | 9.00            | 34.38            | 75.85             | 84.77                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 8          |
|      |                | Frequency  | TX 7115MHz |

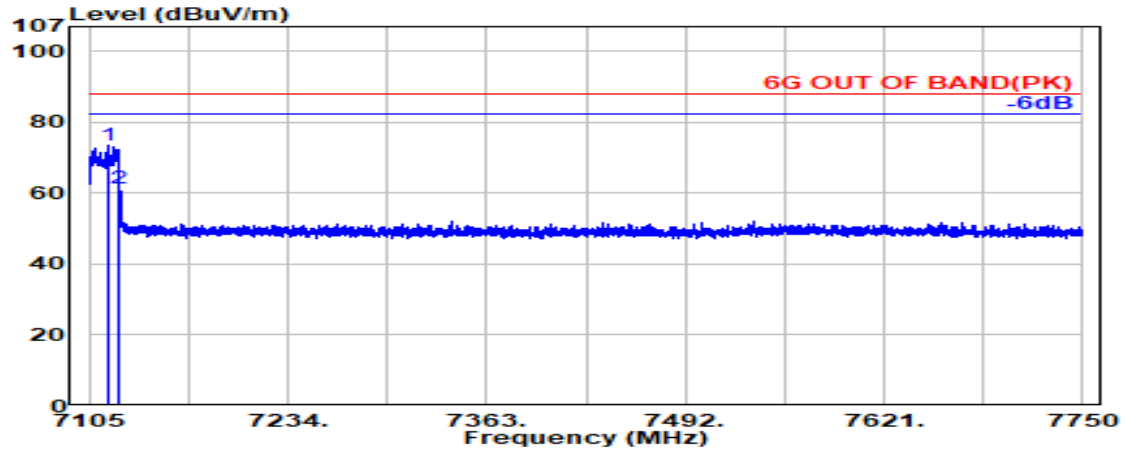

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7116.900               | 35.87                 | 9.80            | 34.48            | 62.50             | 73.68                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 49.99             | 61.20                   | 88.20           | 27.00       | Peak     |

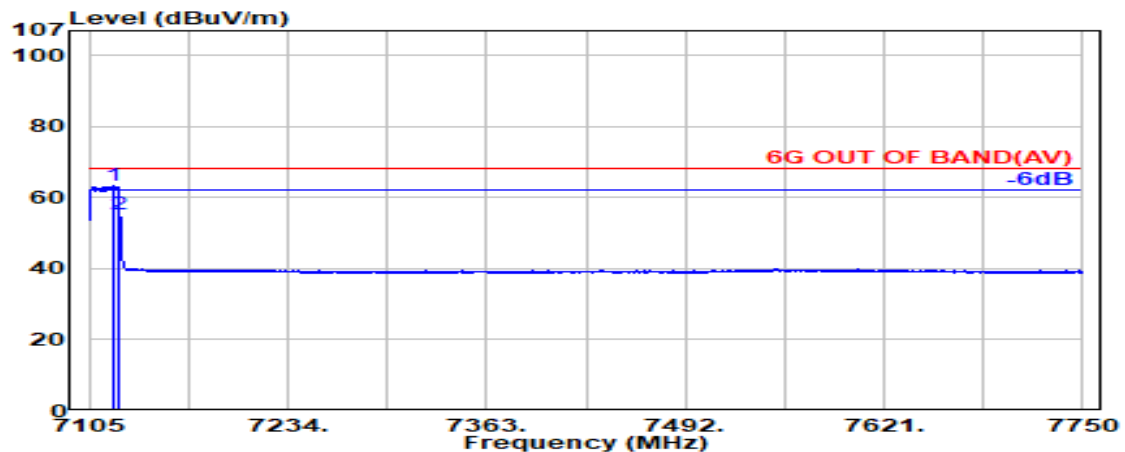

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7120.400               | 35.88                 | 9.80            | 34.49            | 52.06             | 63.25                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 44.05             | 55.26                   | 68.20           | 12.94       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 8          |
|      |                | Frequency  | TX 7115MHz |

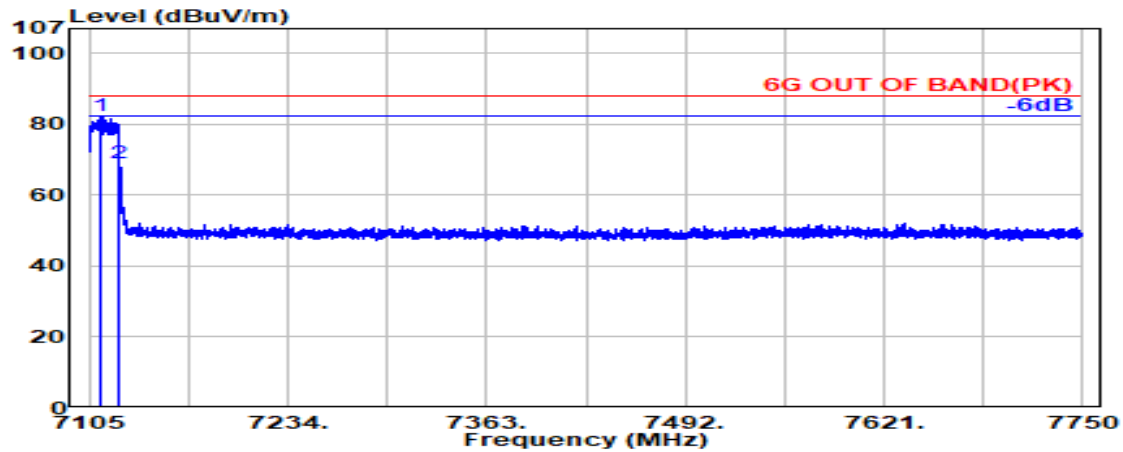

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7112.300               | 35.85                 | 9.79            | 34.48            | 71.36             | 82.52                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 57.98             | 69.19                   | 88.20           | 19.01       | Peak     |

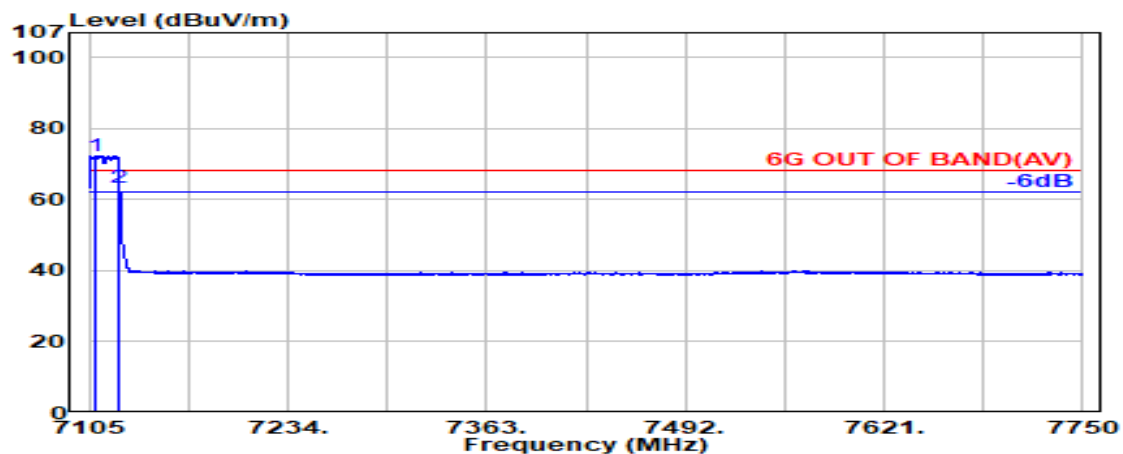

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7109.800               | 35.84                 | 9.79            | 34.48            | 61.31             | 72.47                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 52.13             | 63.34                   | 68.20           | 4.86        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 5          |
|      |                | Frequency  | TX 5965MHz |

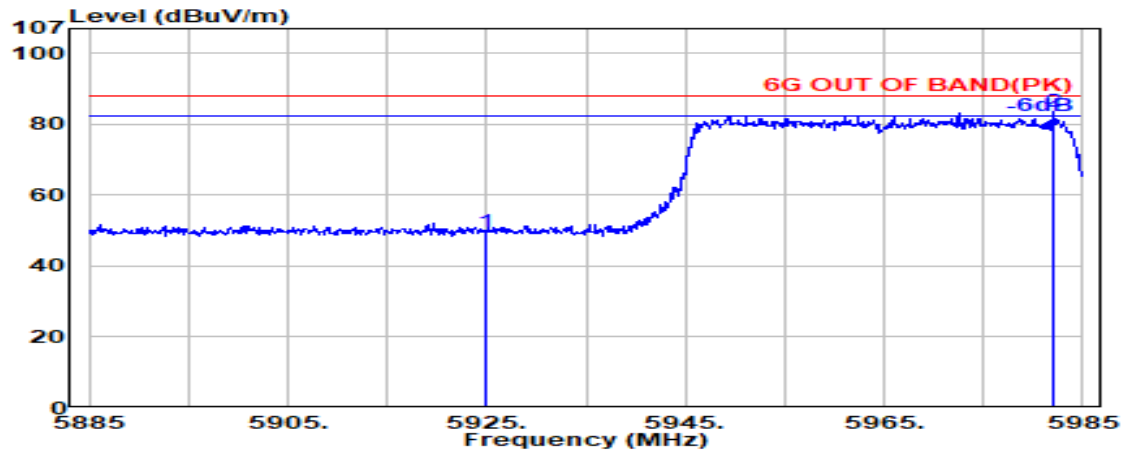

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.81             | 49.63                   | 88.20           | 38.57       | Peak     |
| @ 5982.100               | 34.24                 | 9.02            | 34.39            | 74.79             | 83.65                   | ---             | ---         | Peak     |

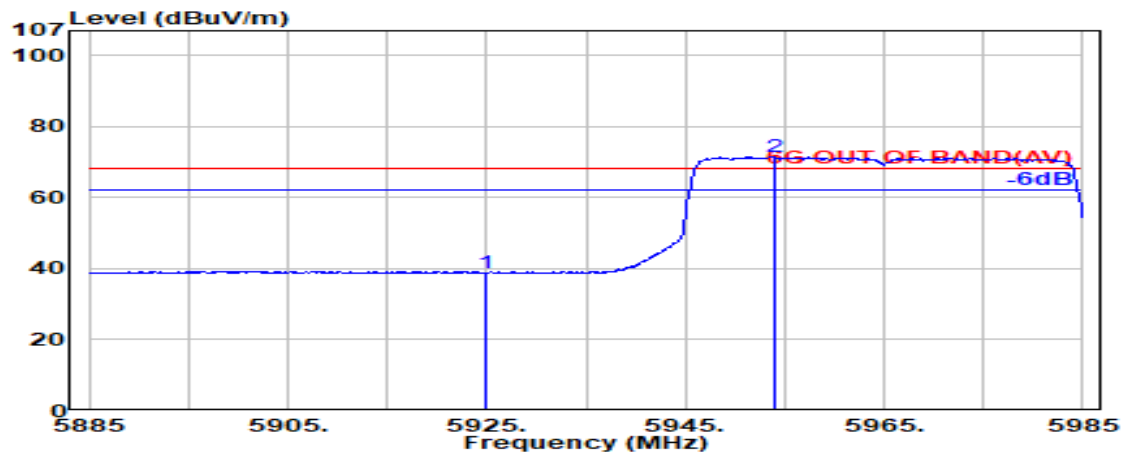

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.01             | 38.83                   | 68.20           | 29.37       | Average  |
| @ 5954.000               | 34.29                 | 9.01            | 34.38            | 62.49             | 71.41                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 5          |
|      |                | Frequency  | TX 5965MHz |

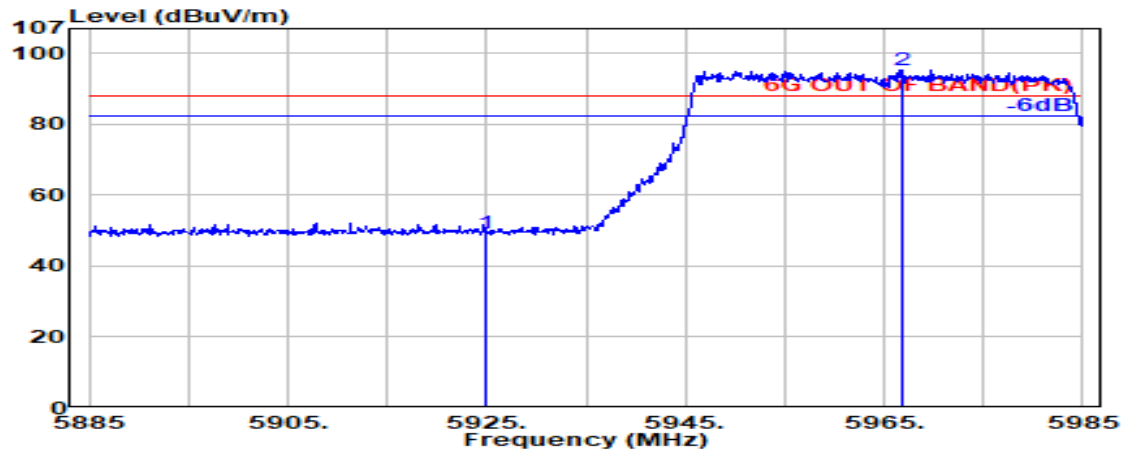

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.53             | 49.35                   | 88.20           | 38.85       | Peak     |
| @ 5966.800               | 34.27                 | 9.01            | 34.39            | 86.36             | 95.25                   | ---             | ---         | Peak     |

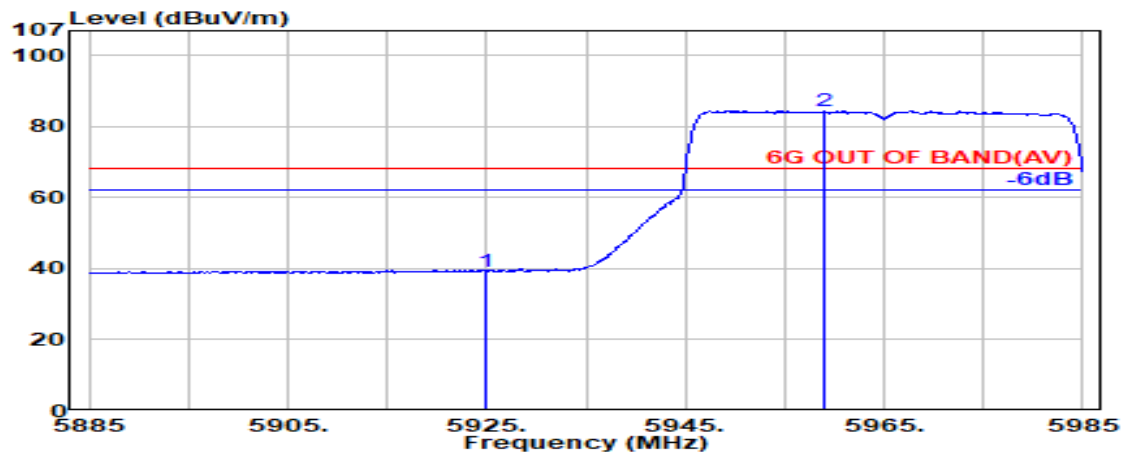

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.49             | 39.31                   | 68.20           | 28.89       | Average  |
| @ 5959.000               | 34.28                 | 9.01            | 34.38            | 75.58             | 84.49                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 8          |
|      |                | Frequency  | TX 7085MHz |

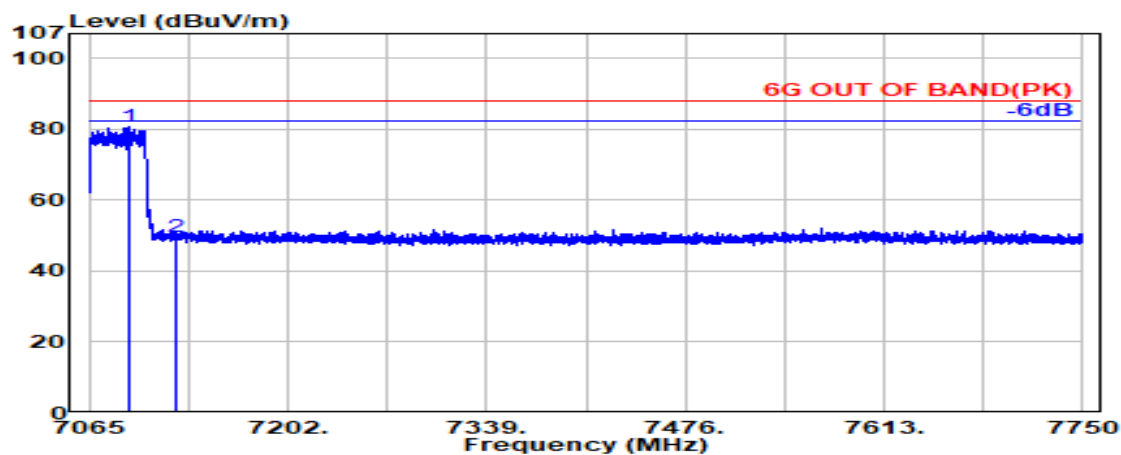

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7091.900               | 35.77                 | 9.78            | 34.47            | 69.62             | 80.70                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.31             | 49.52                   | 88.20           | 38.68       | Peak     |

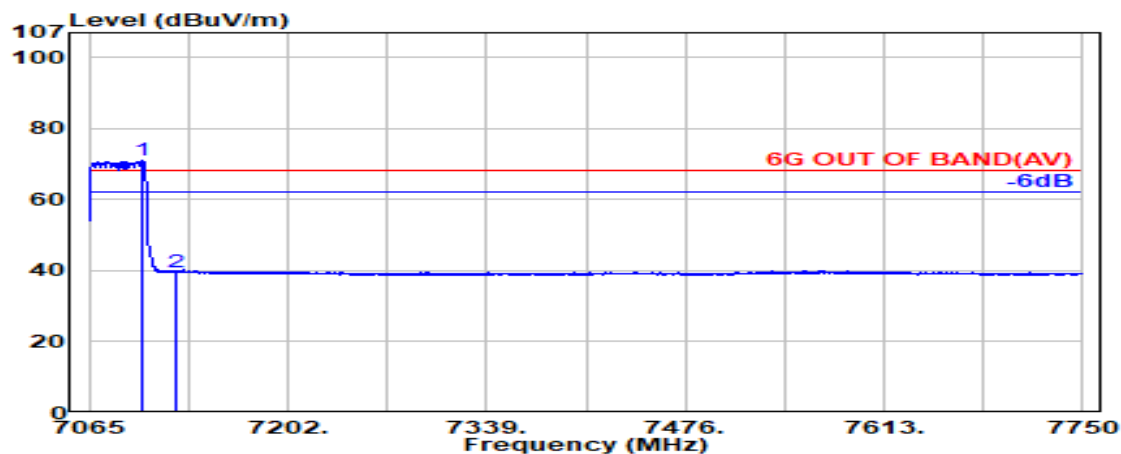

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.300               | 35.81                 | 9.79            | 34.47            | 60.01             | 71.13                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.42             | 39.63                   | 68.20           | 28.57       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 8          |
|      |                | Frequency  | TX 7085MHz |

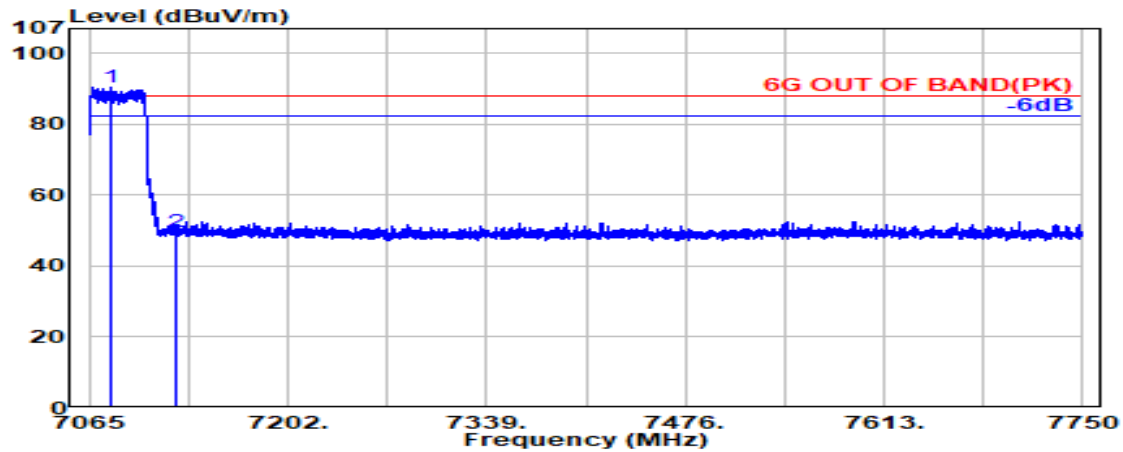

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7079.500               | 35.72                 | 9.77            | 34.46                  | 79.58             | 90.61                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.48             | 49.69                   | 88.20           | 38.51       | Peak     |

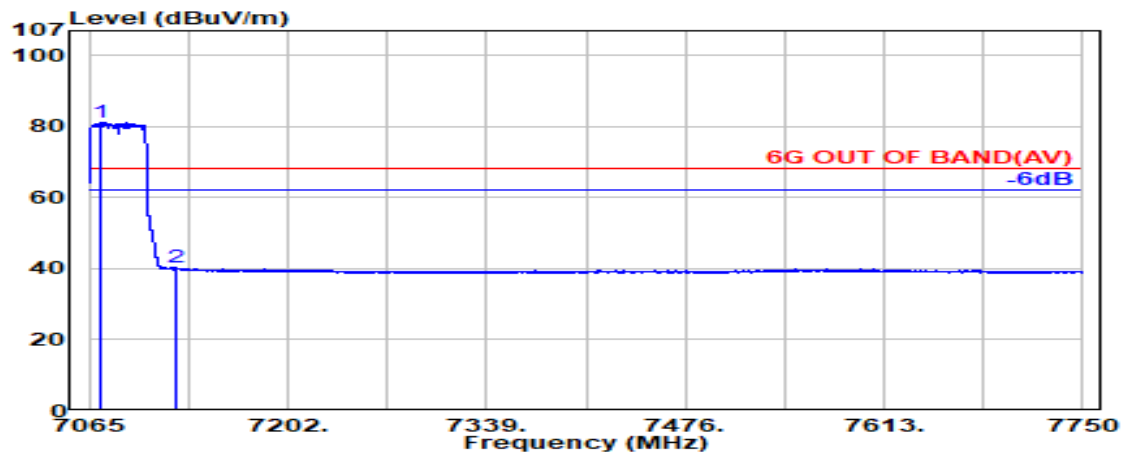

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7073.200               | 35.69                 | 9.77            | 34.45                  | 70.29             | 81.30                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 29.05             | 40.26                   | 68.20           | 27.94       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 5          |
|      |                | Frequency  | TX 5985MHz |

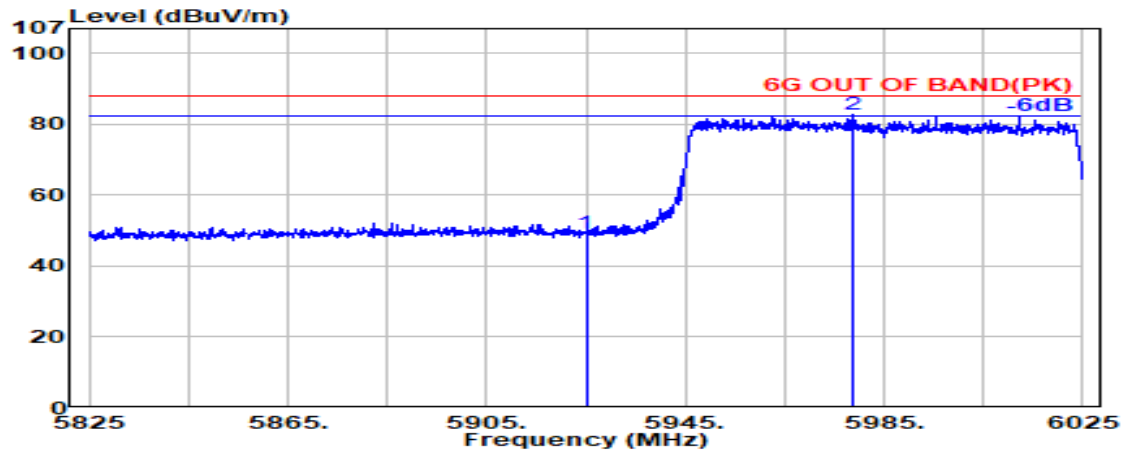

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.53             | 49.35                   | 88.20           | 38.85       | Peak     |
| @ 5978.600               | 34.24                 | 9.02            | 34.39            | 73.90             | 82.77                   | ---             | ---         | Peak     |

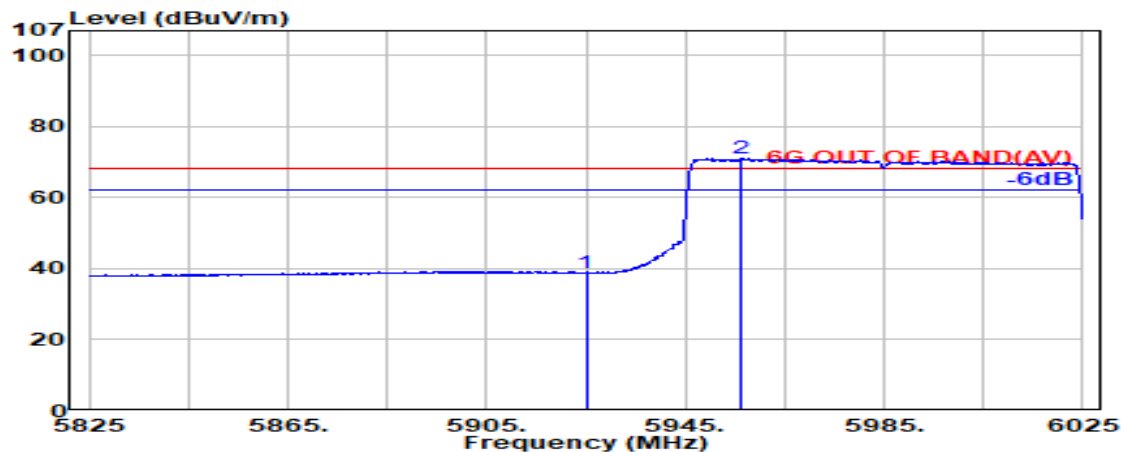


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.08             | 38.90                   | 68.20           | 29.30       | Average  |
| @ 5956.300               | 34.29                 | 9.01            | 34.38            | 62.21             | 71.12                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 5          |
|      |                | Frequency  | TX 5985MHz |

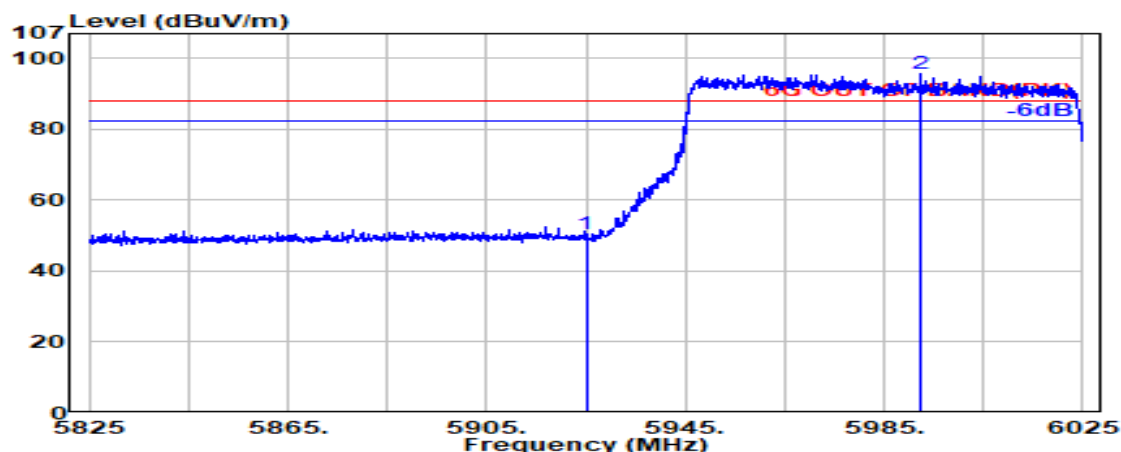

### Antenna at Vertical Polarization

|   | Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|---|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
|   | 5925.000                       | 34.20                       | 8.99                  | 34.37                  | 41.70                   | 50.52                         | 88.20              | 37.68          | Peak     |
| @ | 5992.400                       | 34.22                       | 9.03                  | 34.40                  | 86.89                   | 95.74                         | ---                | ---            | Peak     |

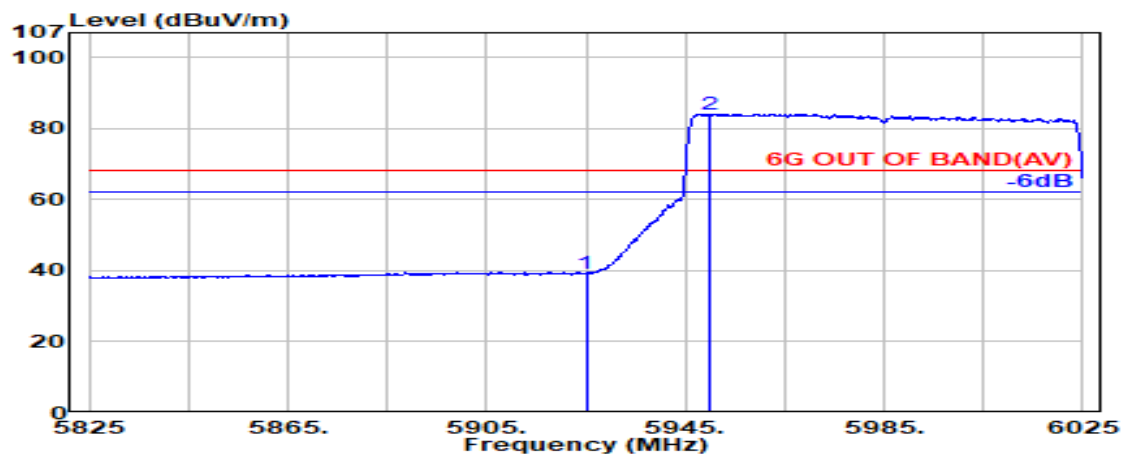

### Antenna at Vertical Polarization


| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 5925.000                       | 34.20                       | 8.99                  | 34.37                  | 30.46                   | 39.28                         | 68.20              | 28.92          | Average  |
| @ 5949.800                     | 34.30                       | 9.00                  | 34.38                  | 75.25                   | 84.17                         | ---                | ---            | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 8          |
|      |                | Frequency  | TX 7025MHz |

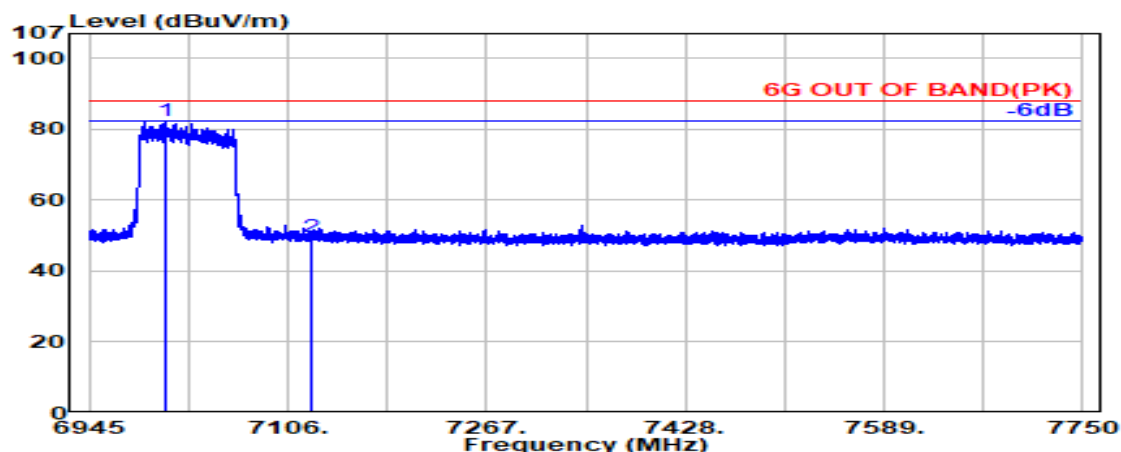

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7006.400               | 35.51                 | 9.72            | 34.40            | 71.34             | 82.17                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.53             | 49.74                   | 88.20           | 38.46       | Peak     |

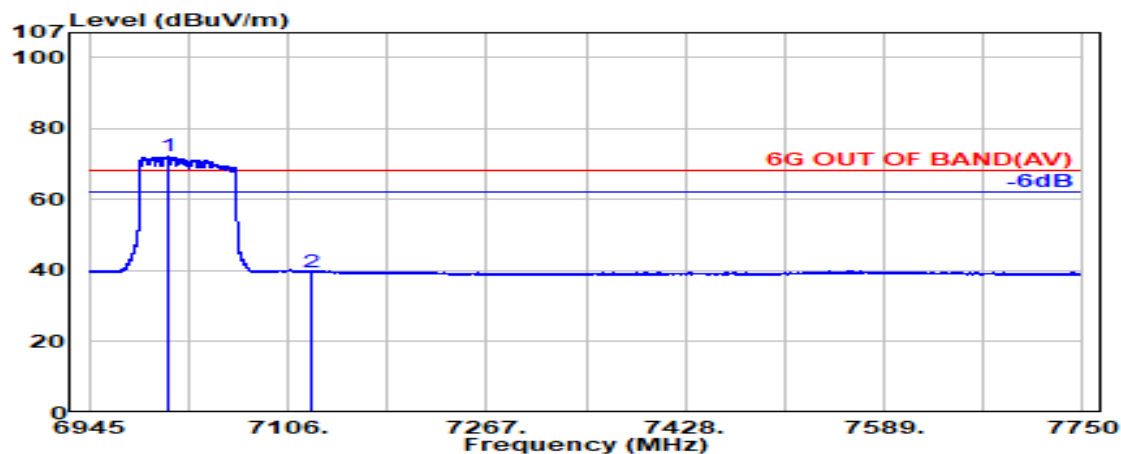

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.200               | 35.52                 | 9.73            | 34.41            | 61.42             | 72.25                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.42             | 39.64                   | 68.20           | 28.56       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 8          |
|      |                | Frequency  | TX 7025MHz |

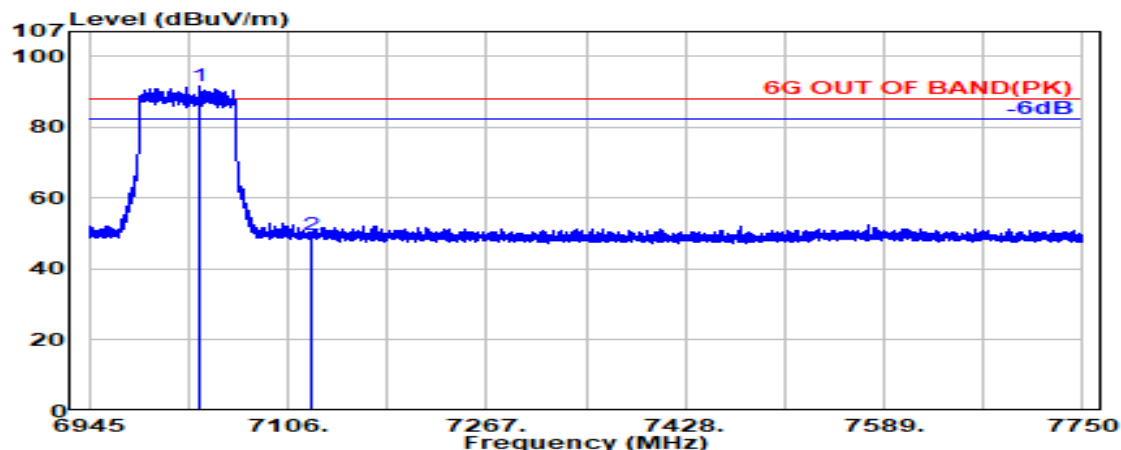

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7033.500               | 35.57                 | 9.74            | 34.42                  | 80.69             | 91.57                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.54             | 49.75                   | 88.20           | 38.45       | Peak     |

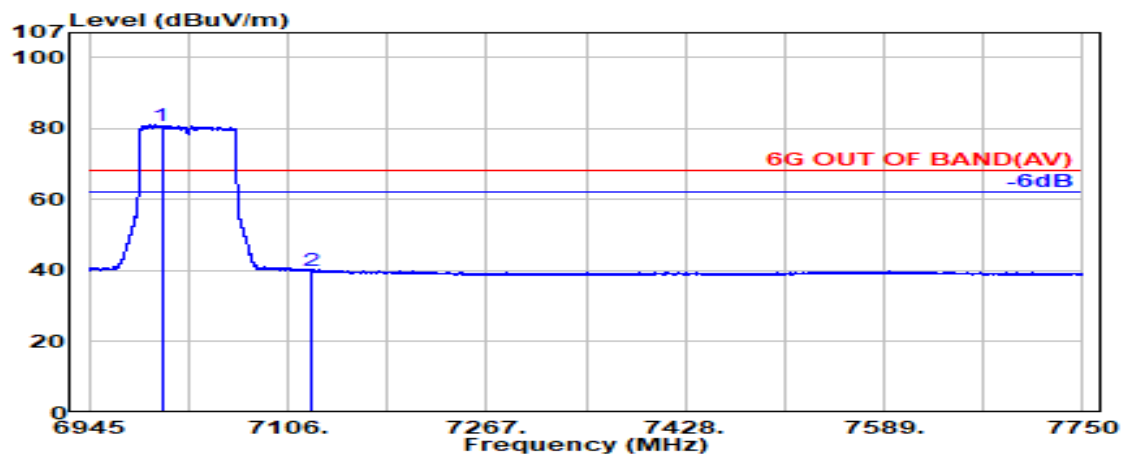

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7003.800               | 35.51                 | 9.72            | 34.40                  | 70.00             | 80.83                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.79             | 40.00                   | 68.20           | 28.20       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6025MHz |

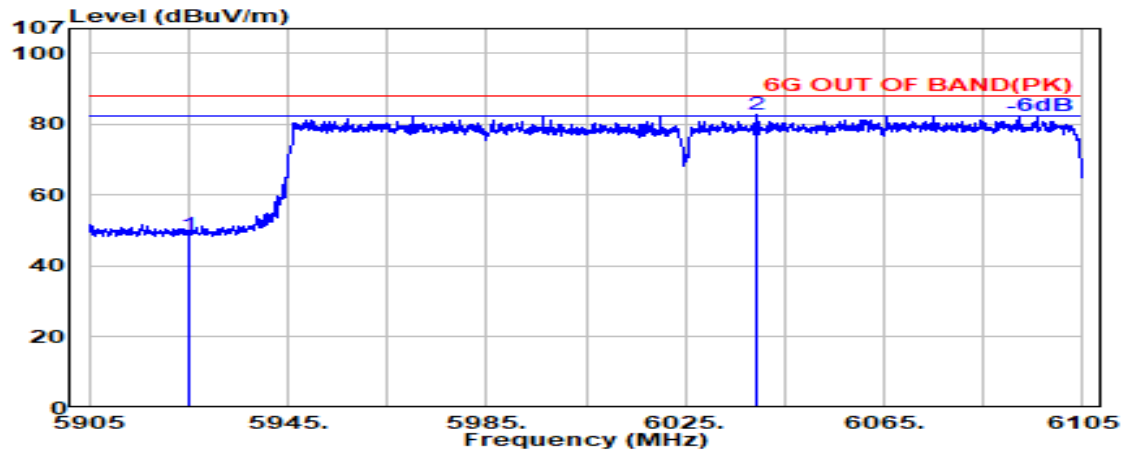

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.10             | 48.92                   | 88.20           | 39.28       | Peak     |
| @ 6039.100               | 34.20                 | 9.06            | 34.38                  | 73.83             | 82.71                   | ---             | ---         | Peak     |

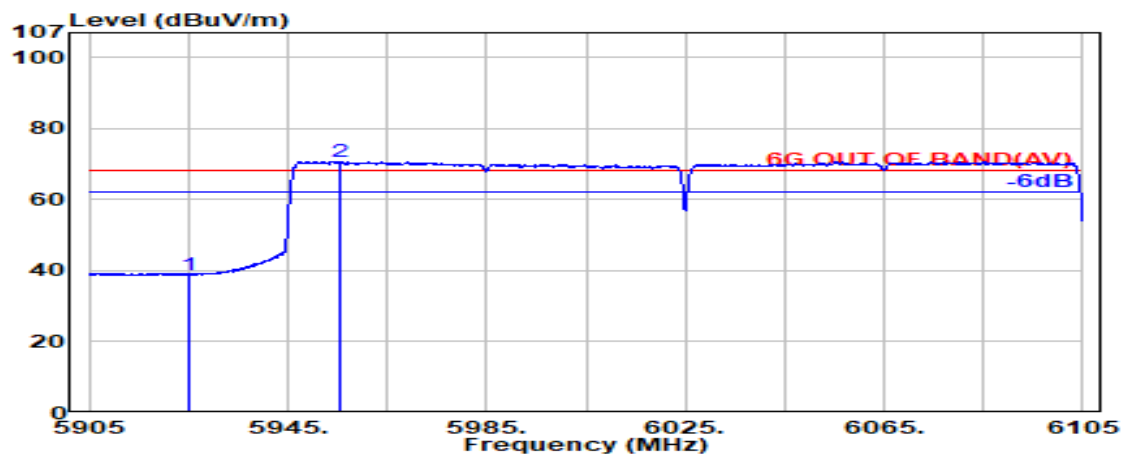

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.06             | 38.88                   | 68.20           | 29.32       | Average  |
| @ 5955.300               | 34.29                 | 9.01            | 34.38                  | 61.87             | 70.79                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6025MHz |

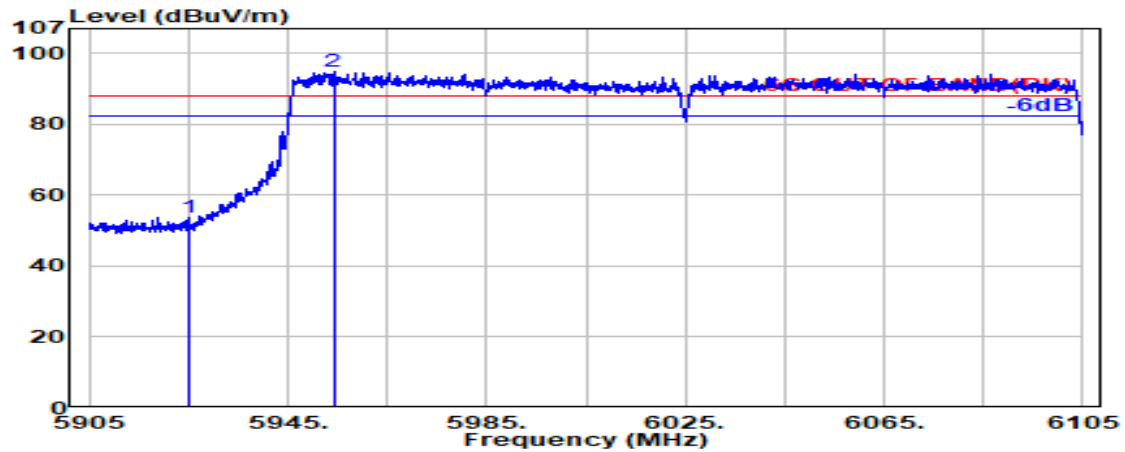

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 45.01             | 53.83                   | 88.20           | 34.37       | Peak     |
| @ 5954.200               | 34.29                 | 9.01            | 34.38            | 85.77             | 94.69                   | ---             | ---         | Peak     |

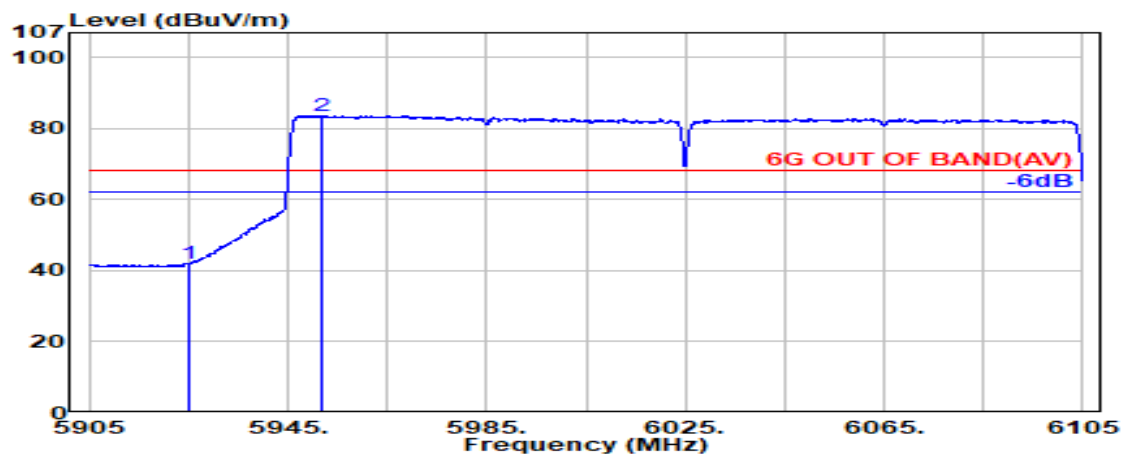

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 33.09             | 41.91                   | 68.20           | 26.29       | Average  |
| @ 5951.700               | 34.30                 | 9.00            | 34.38            | 74.75             | 83.68                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6985MHz |

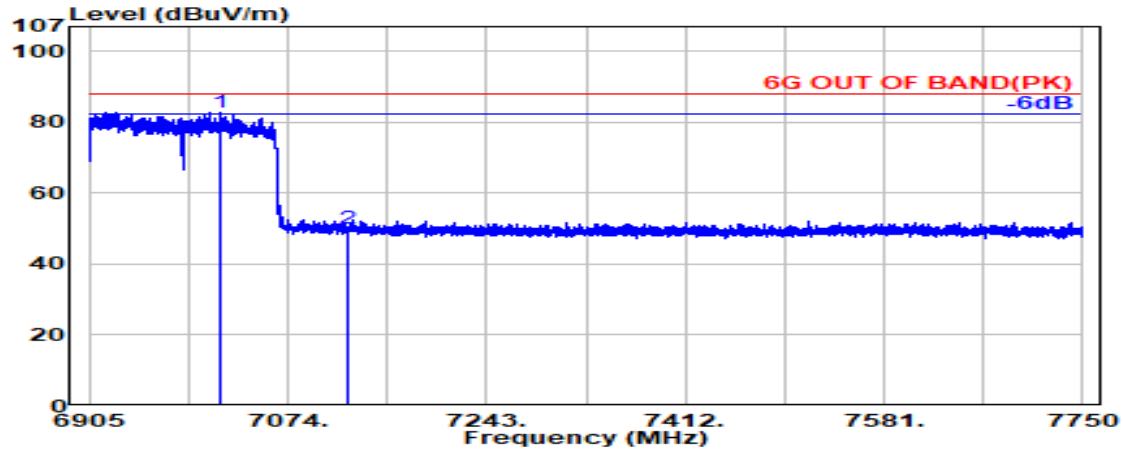

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7015.800               | 35.53                 | 9.73            | 34.41                  | 71.85             | 82.70                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.89             | 50.11                   | 88.20           | 38.09       | Peak     |

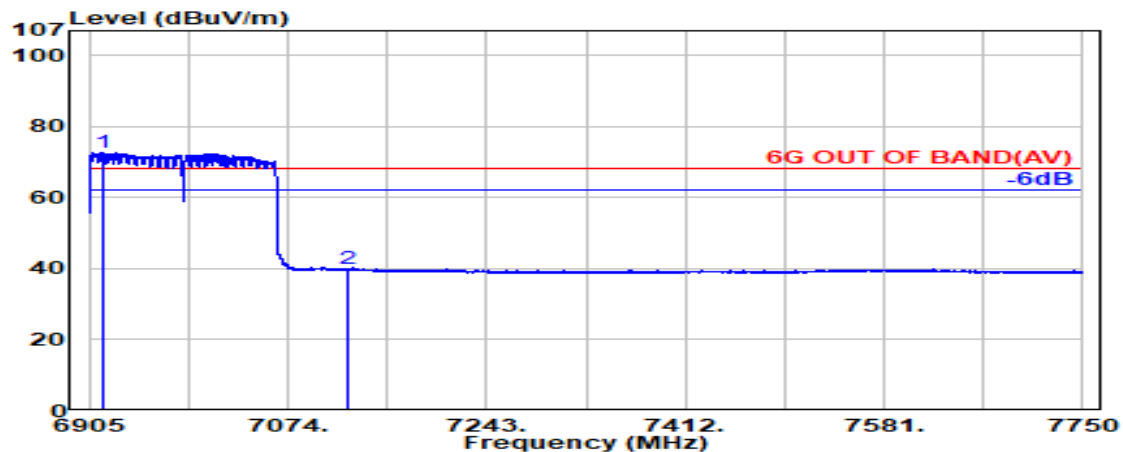

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6917.400               | 35.43                 | 9.67            | 34.35                  | 62.13             | 72.88                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.60             | 39.81                   | 68.20           | 28.39       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6985MHz |

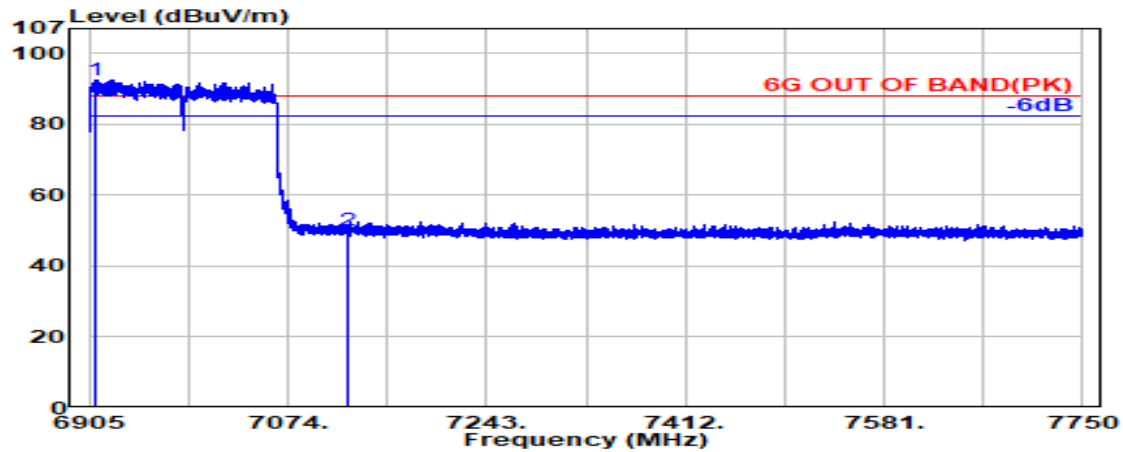

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6911.300               | 35.42                 | 9.66            | 34.35            | 81.89             | 92.62                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.79             | 50.00                   | 88.20           | 38.20       | Peak     |

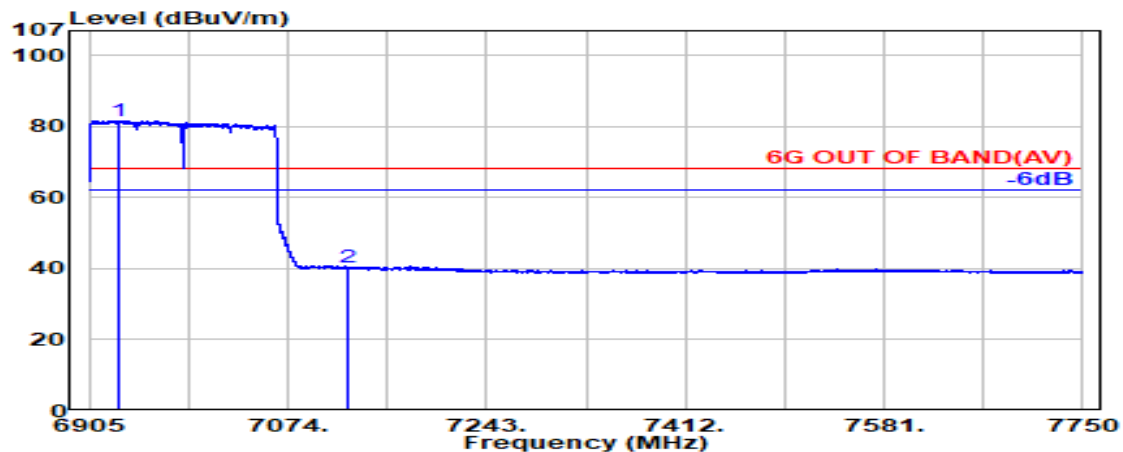

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6929.800               | 35.46                 | 9.67            | 34.36            | 70.87             | 81.65                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 29.02             | 40.23                   | 68.20           | 27.97       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6105MHz |

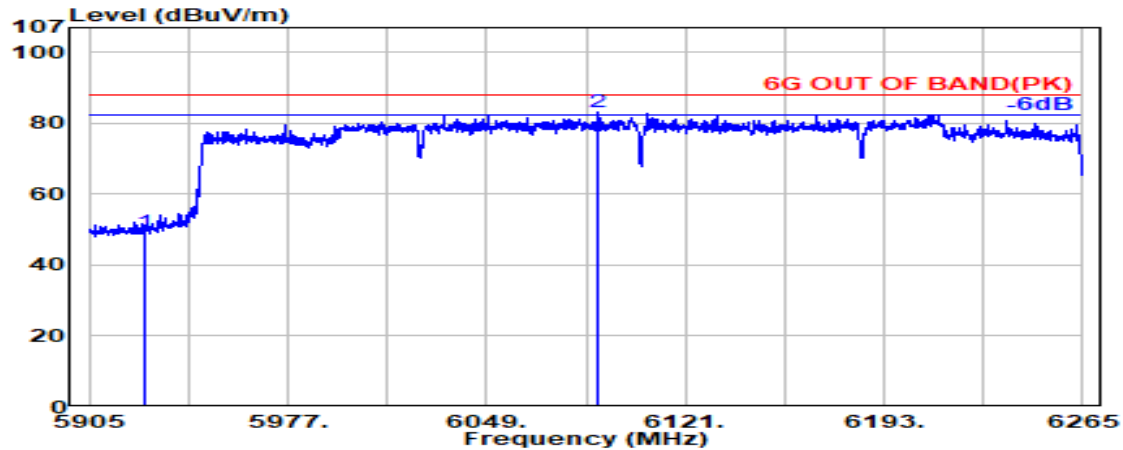

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.37             | 49.20                   | 88.20           | 39.00       | Peak     |
| @ 6089.140               | 34.28                 | 9.10            | 34.34            | 73.97             | 83.00                   | ---             | ---         | Peak     |

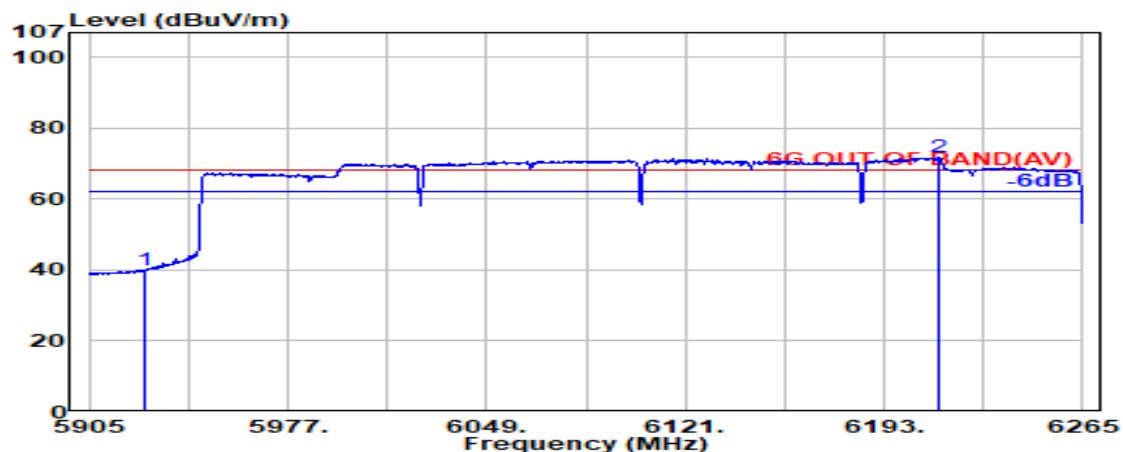

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.95             | 39.77                   | 68.20           | 28.43       | Average  |
| @ 6212.980               | 34.63                 | 9.19            | 34.27            | 62.30             | 71.85                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6105MHz |

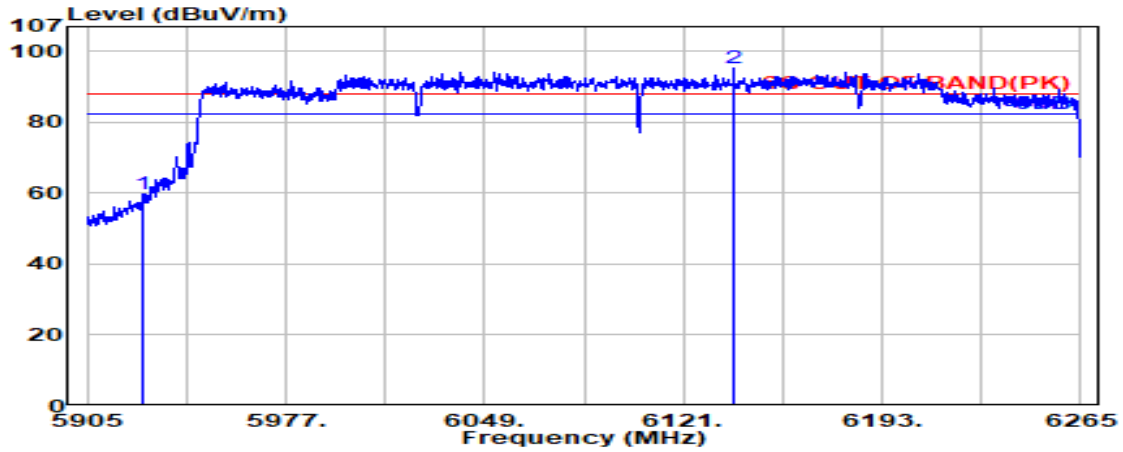

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 50.84             | 59.66                   | 88.20           | 28.54       | Peak     |
| @ 6139.000               | 34.46                 | 9.13            | 34.31            | 85.88             | 95.16                   | ---             | ---         | Peak     |

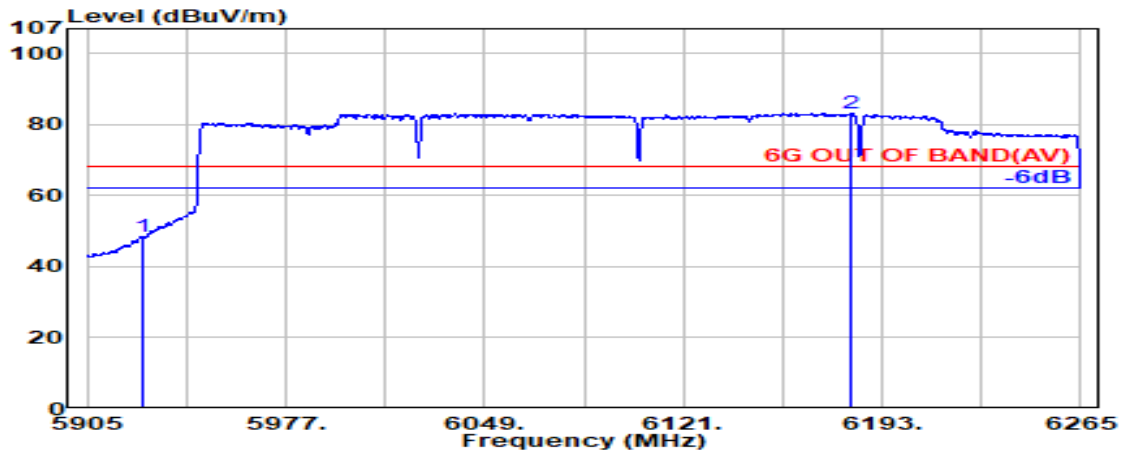

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 39.59             | 48.41                   | 68.20           | 19.79       | Average  |
| @ 6181.840               | 34.56                 | 9.16            | 34.29            | 73.86             | 83.30                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6905MHz |

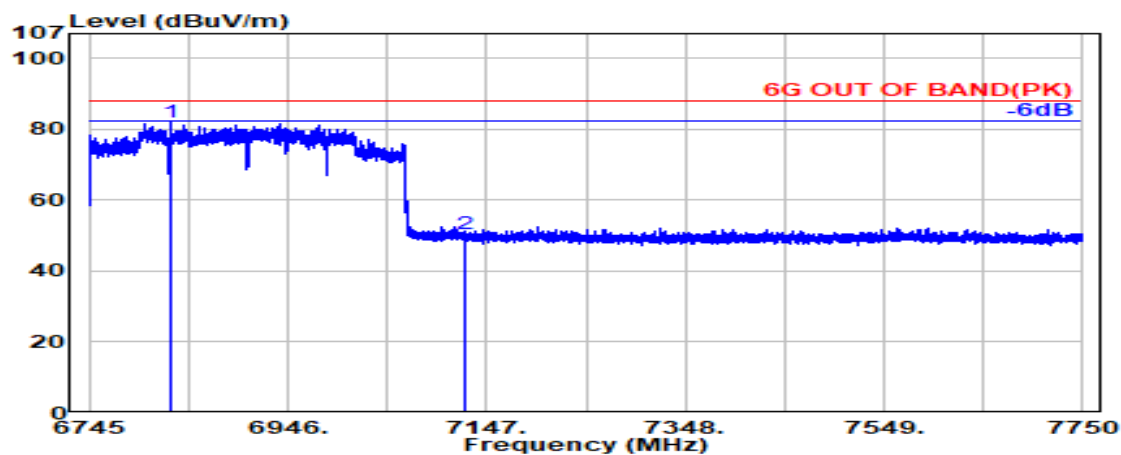

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6827.303               | 35.49                 | 9.61            | 34.30                  | 71.09             | 81.89                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.29             | 50.50                   | 88.20           | 37.70       | Peak     |

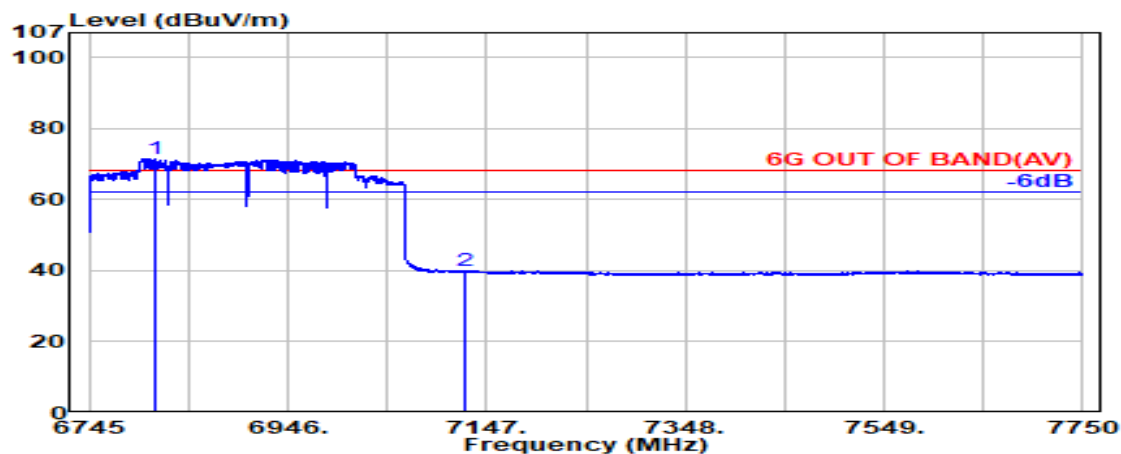

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6811.723               | 35.55                 | 9.60            | 34.29                  | 60.66             | 71.52                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.74             | 39.95                   | 68.20           | 28.25       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6905MHz |

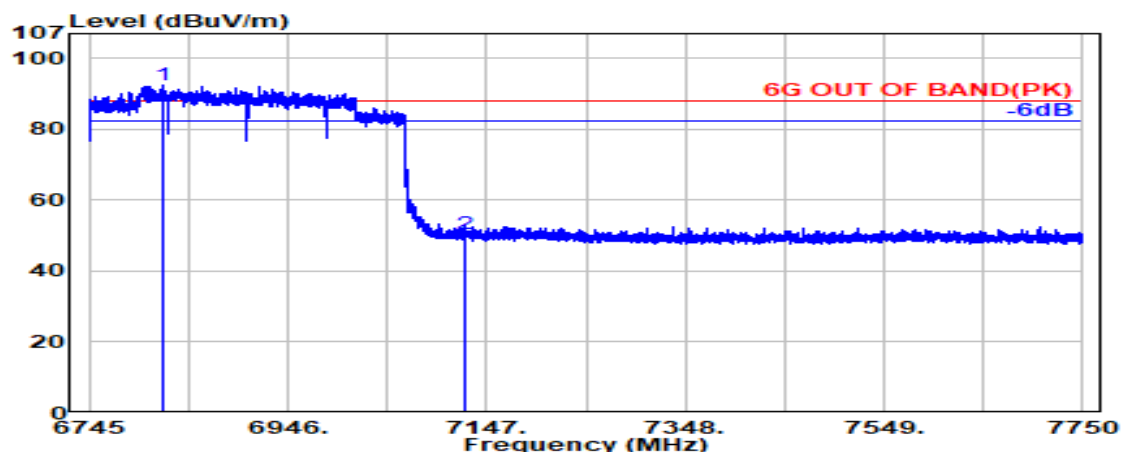

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6820.167               | 35.52                 | 9.60            | 34.29                  | 81.45             | 92.27                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.06             | 50.27                   | 88.20           | 37.93       | Peak     |

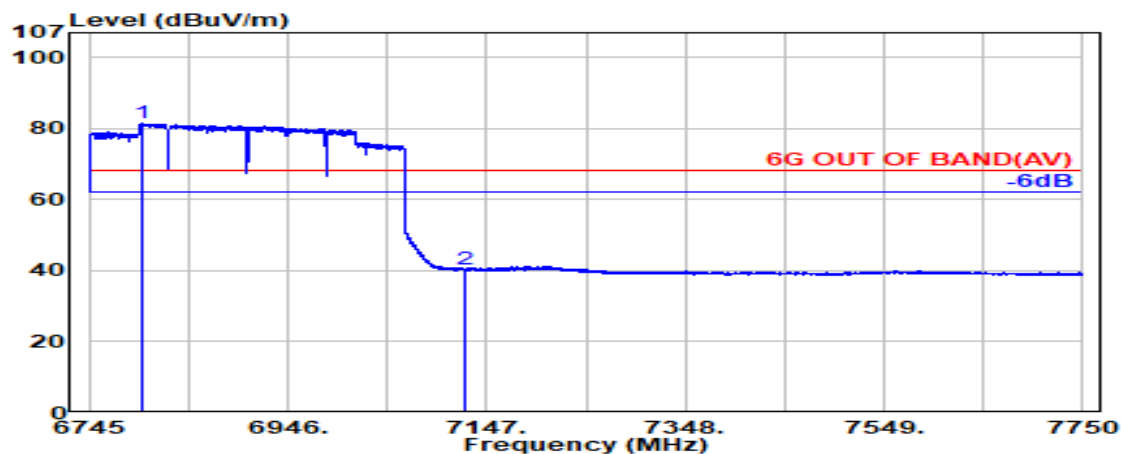

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6798.521               | 35.60                 | 9.59            | 34.28                  | 70.68             | 81.58                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 29.19             | 40.40                   | 68.20           | 27.80       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303


## ● OFDMA Modulation

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T            | RU Index   | 0          |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

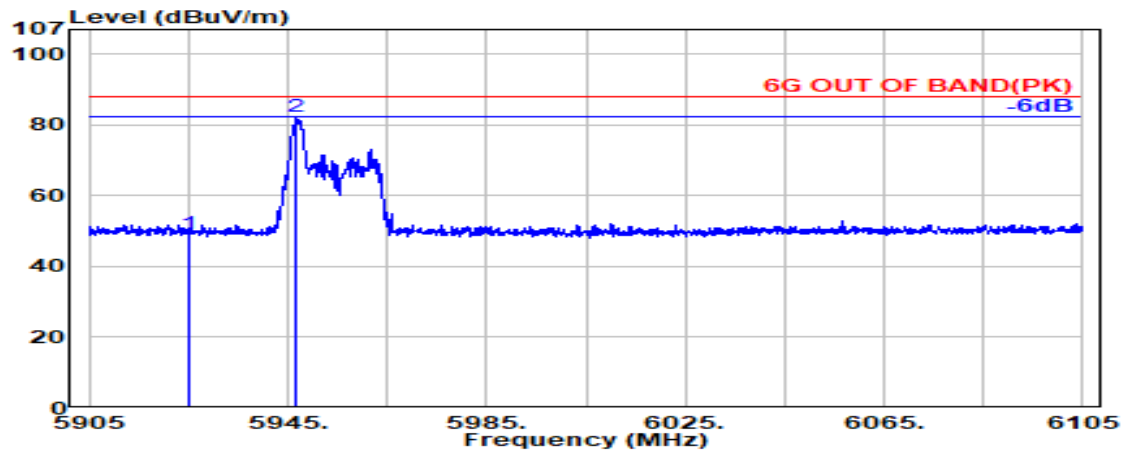

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.54             | 49.37                   | 88.20           | 38.83       | Peak     |
| @ 5946.700               | 34.29                 | 9.00            | 34.38                  | 73.40             | 82.32                   | ---             | ---         | Peak     |

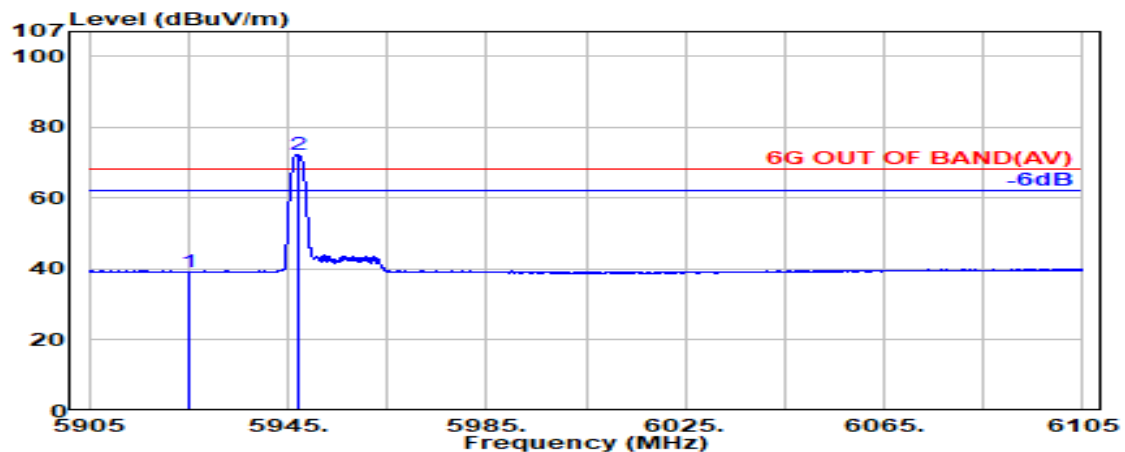

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.39             | 39.21                   | 68.20           | 28.99       | Average  |
| @ 5946.900               | 34.29                 | 9.00            | 34.38                  | 63.39             | 72.30                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T            | RU Index   | 0          |
| Mode  | 802.11ax-HE160 | U-NII Band | 5          |
|       |                | Frequency  | TX 6025MHz |

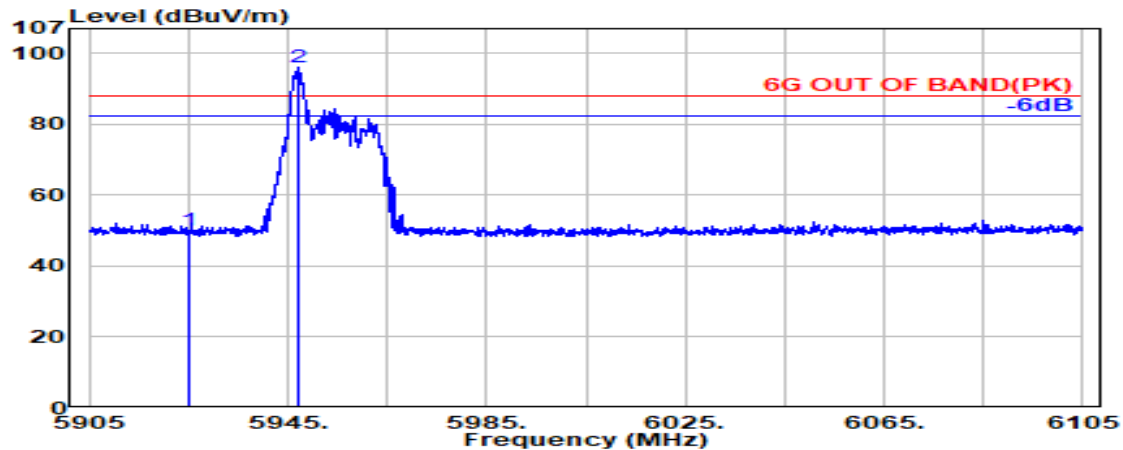

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.40             | 50.23                   | 88.20           | 37.97       | Peak     |
| @ 5947.300               | 34.29                 | 9.00            | 34.38                  | 87.09             | 96.01                   | ---             | ---         | Peak     |

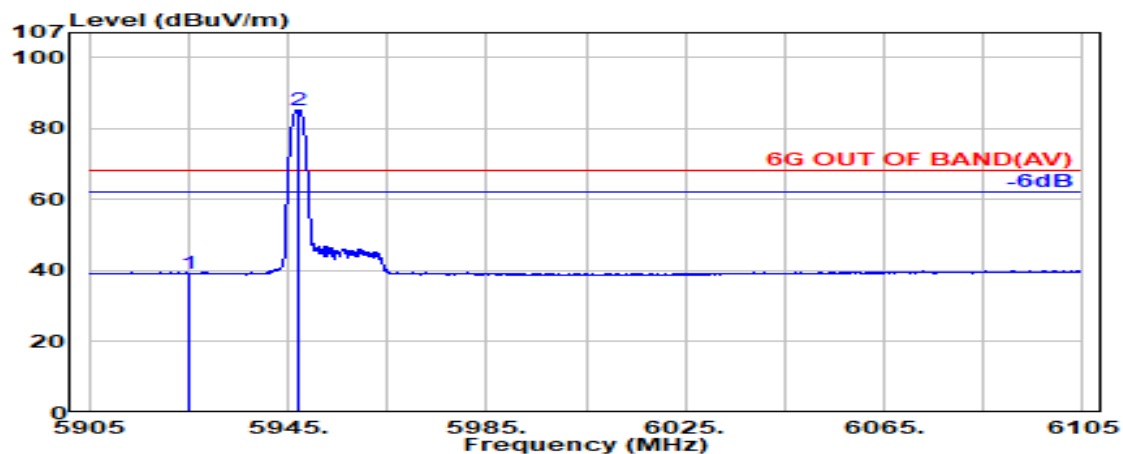

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.33             | 39.15                   | 68.20           | 29.05       | Average  |
| @ 5947.200               | 34.29                 | 9.00            | 34.38                  | 76.35             | 85.27                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 36         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

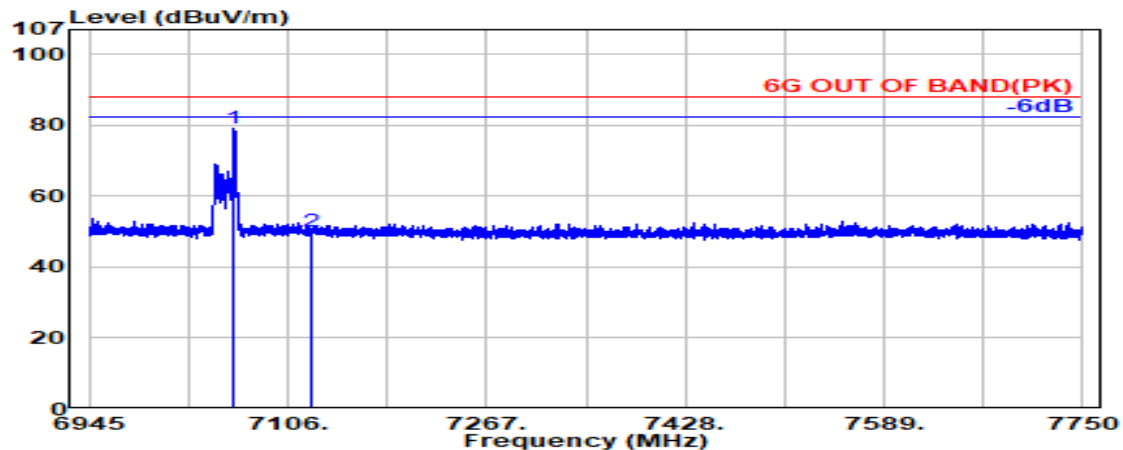

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.400                 | 35.65                 | 9.76            | 34.45                  | 68.25             | 79.22                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 38.94             | 50.15                   | 88.20           | 38.05       | Peak     |

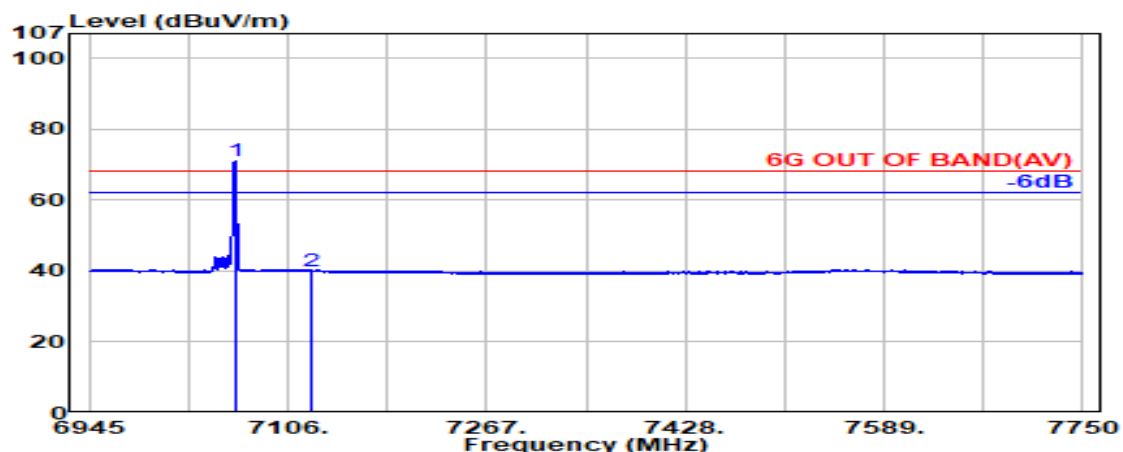

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7063.000                 | 35.65                 | 9.76            | 34.45                  | 60.13             | 71.10                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 28.72             | 39.93                   | 68.20           | 28.27       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 26T           | RU Index   | 36         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

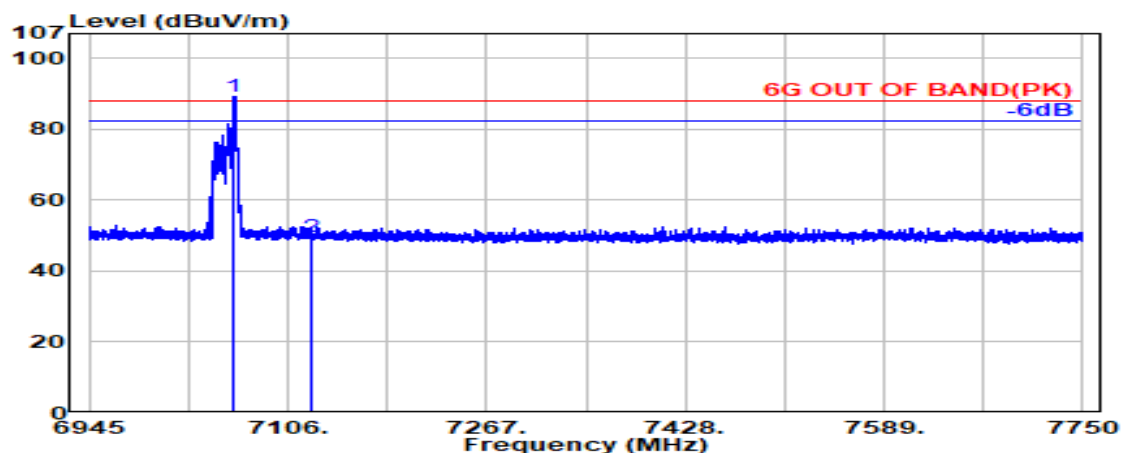

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.400                 | 35.65                 | 9.76            | 34.45            | 78.43             | 89.40                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49            | 38.31             | 49.52                   | 88.20           | 38.68       | Peak     |

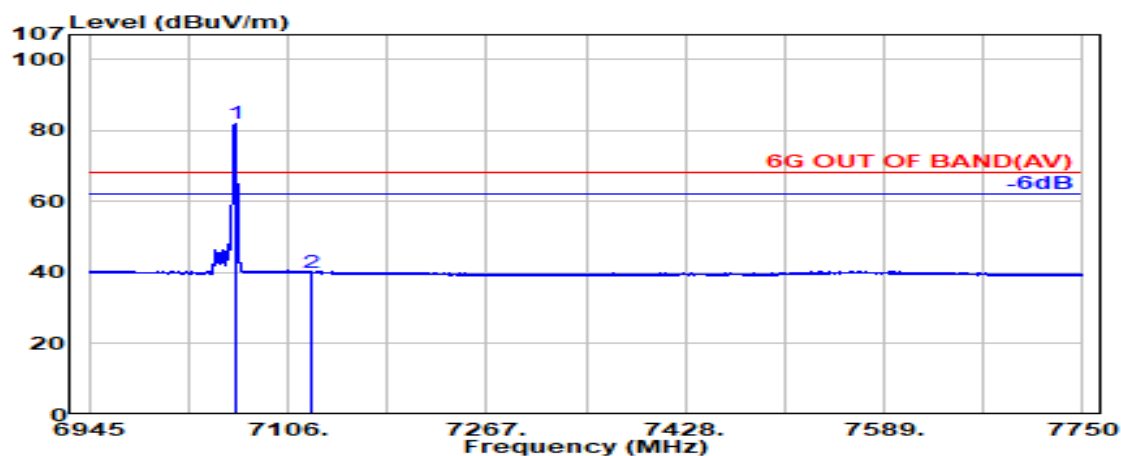

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7063.100                 | 35.65                 | 9.76            | 34.45            | 71.09             | 82.06                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49            | 28.83             | 40.04                   | 68.20           | 28.16       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

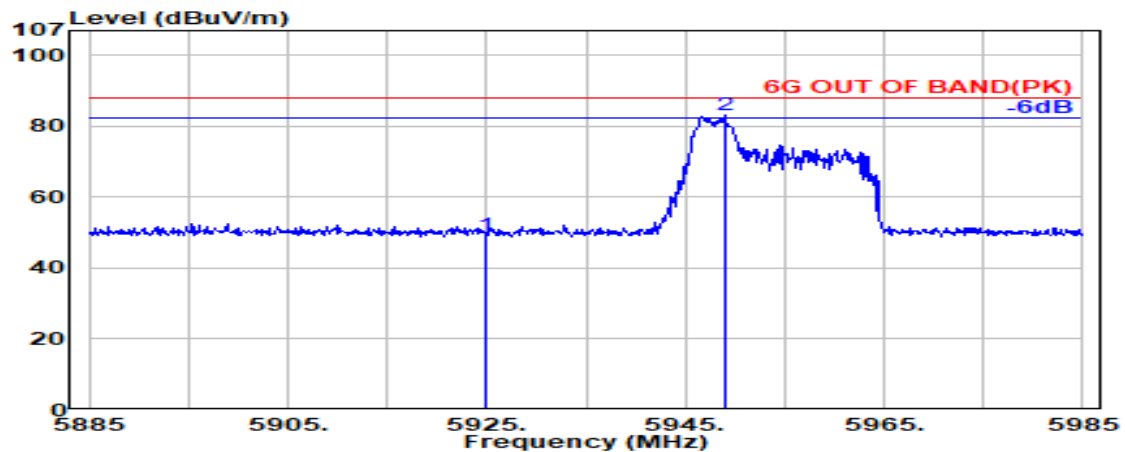

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.38             | 49.21                   | 88.20           | 38.99       | Peak     |
| @ 5948.900               | 34.30                 | 9.00            | 34.38                  | 74.10             | 83.02                   | ---             | ---         | Peak     |

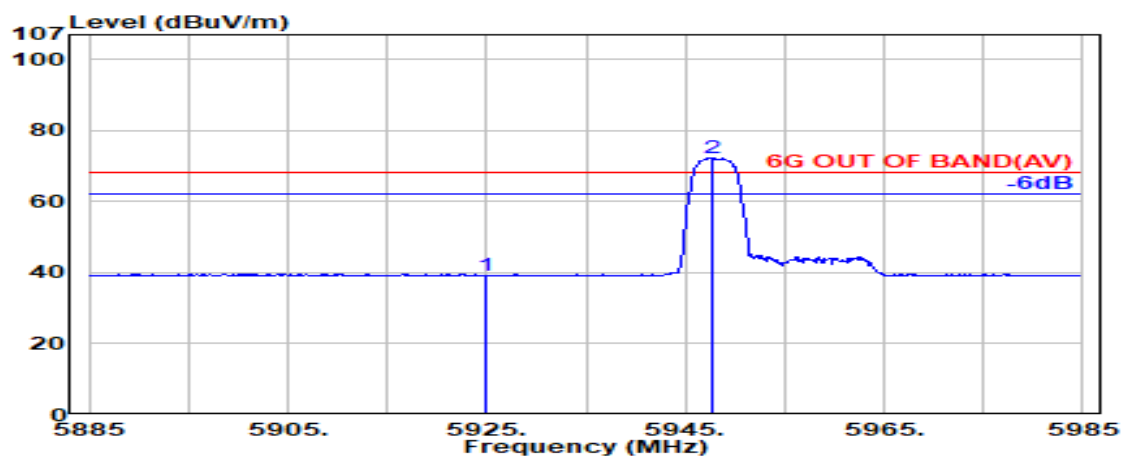

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.41             | 39.23                   | 68.20           | 28.97       | Average  |
| @ 5947.800               | 34.29                 | 9.00            | 34.38                  | 63.43             | 72.34                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 37         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

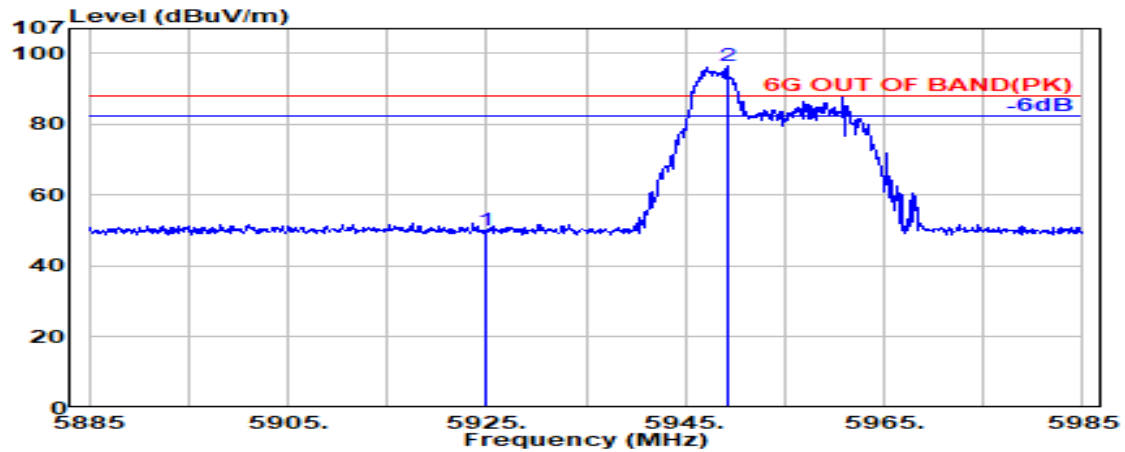

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.40             | 50.22                   | 88.20           | 37.98       | Peak     |
| @ 5949.300               | 34.30                 | 9.00            | 34.38                  | 87.75             | 96.67                   | ---             | ---         | Peak     |

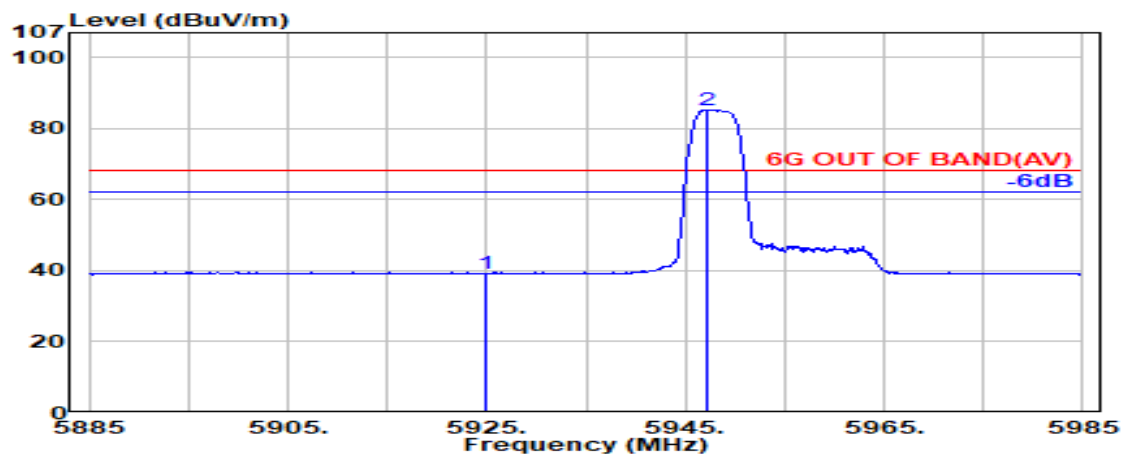

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.33             | 39.15                   | 68.20           | 29.05       | Average  |
| @ 5947.300               | 34.29                 | 9.00            | 34.38                  | 76.36             | 85.27                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 52         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

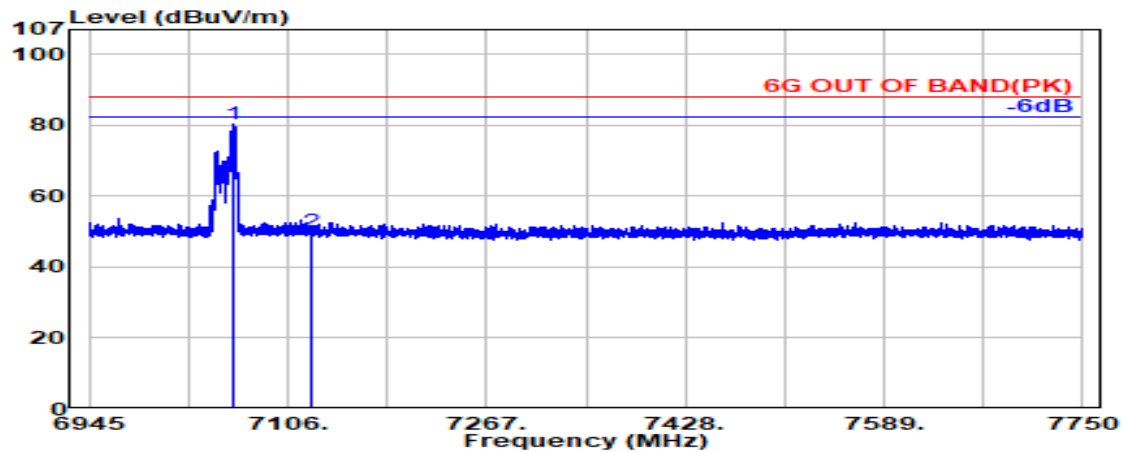

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.400               | 35.65                 | 9.76            | 34.44                  | 69.21             | 80.17                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.90             | 50.11                   | 88.20           | 38.09       | Peak     |

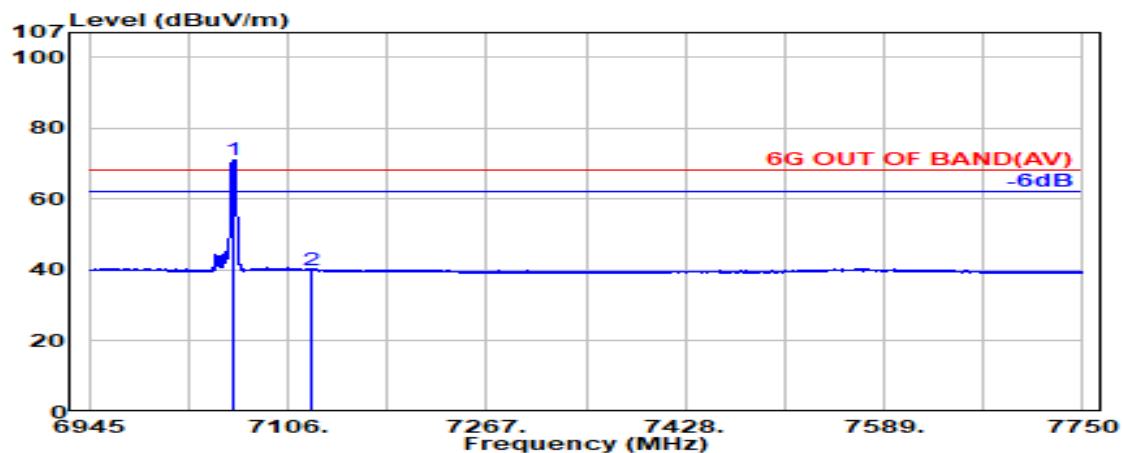

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.200               | 35.64                 | 9.76            | 34.44                  | 60.21             | 71.17                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.87             | 40.09                   | 68.20           | 28.11       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 52T           | RU Index   | 52         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

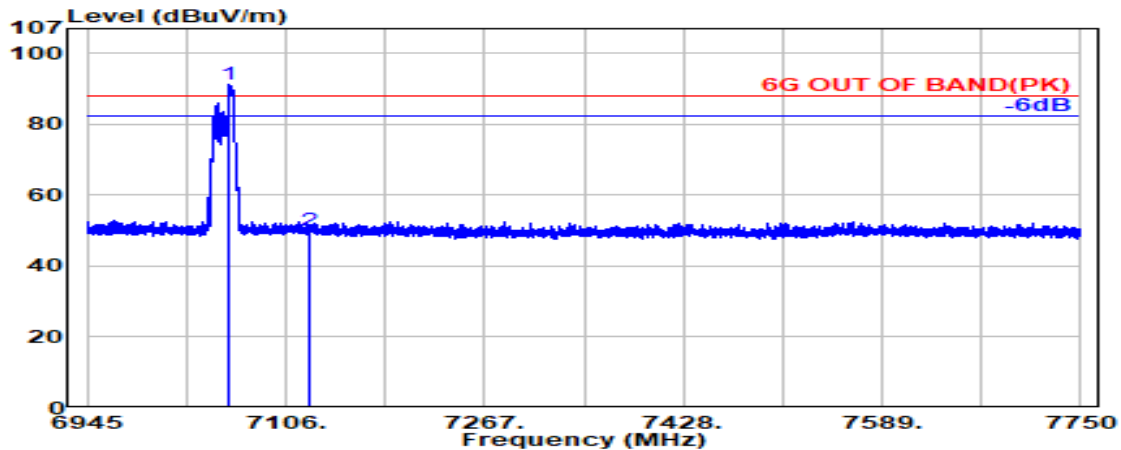

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7060.300               | 35.64                 | 9.76            | 34.44                  | 80.43             | 91.39                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.78             | 49.99                   | 88.20           | 38.21       | Peak     |

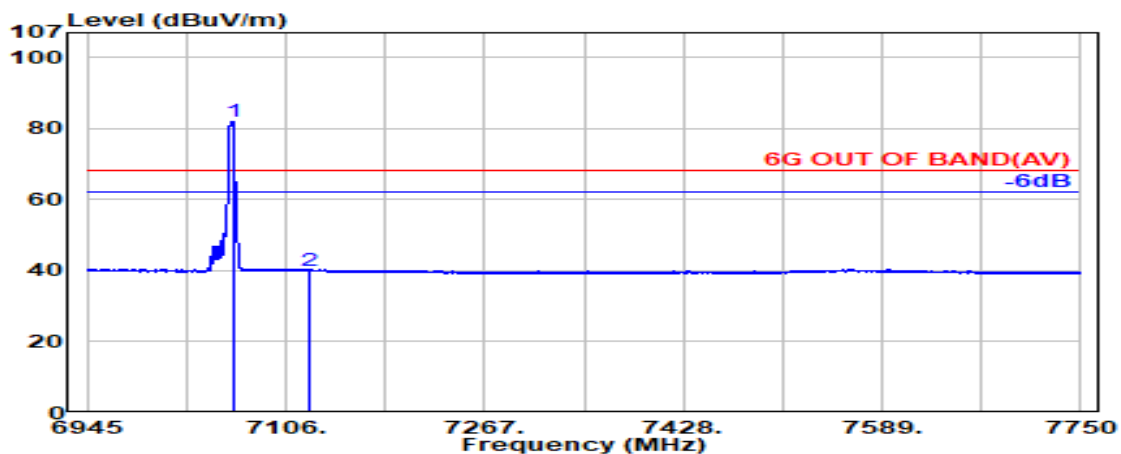

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7063.200               | 35.65                 | 9.76            | 34.45                  | 70.89             | 81.85                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.76             | 39.97                   | 68.20           | 28.23       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

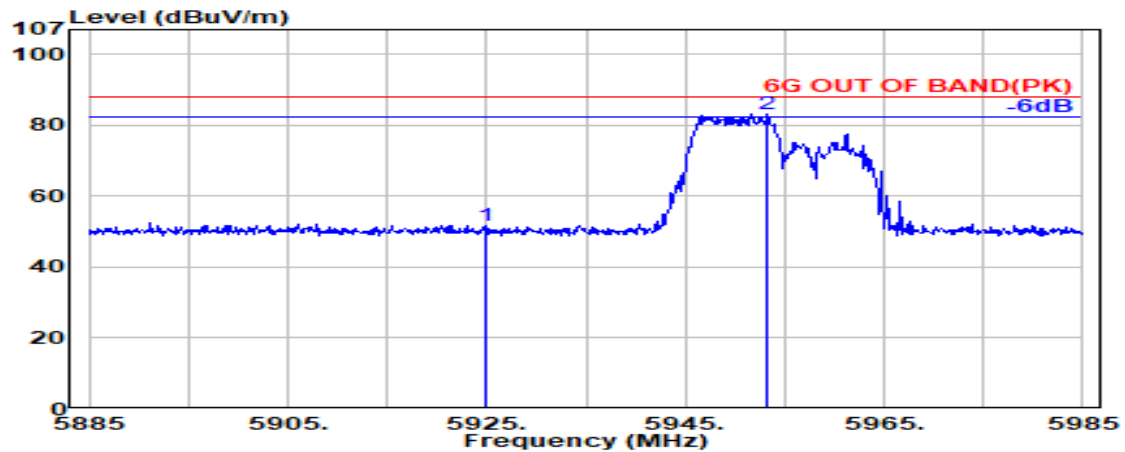

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.02             | 51.84                   | 88.20           | 36.36       | Peak     |
| @ 5953.300               | 34.29                 | 9.01            | 34.38                  | 74.11             | 83.03                   | ---             | ---         | Peak     |

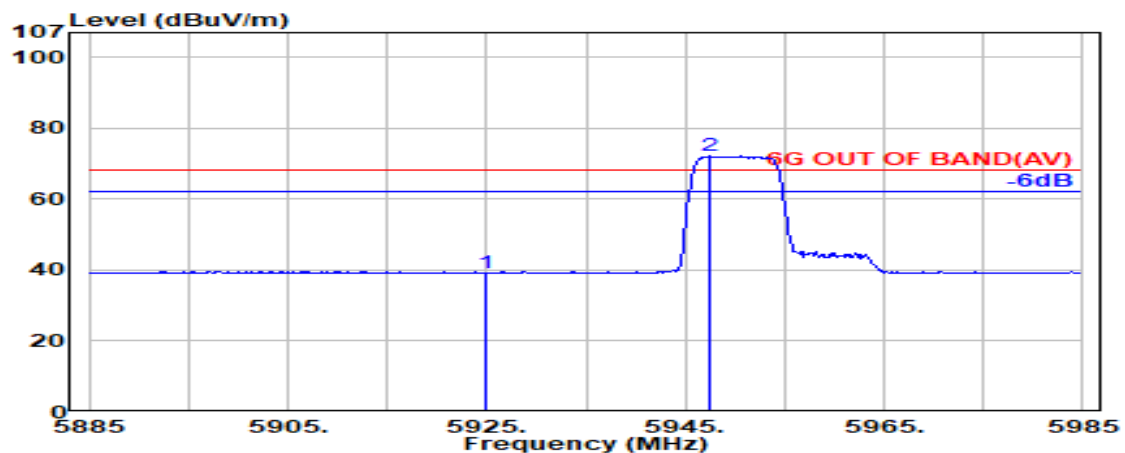

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.43             | 39.26                   | 68.20           | 28.94       | Average  |
| @ 5947.400               | 34.29                 | 9.00            | 34.38                  | 63.31             | 72.23                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 53         |
| Mode  | 802.11ax-HE40 | U-NII Band | 5          |
|       |               | Frequency  | TX 5965MHz |

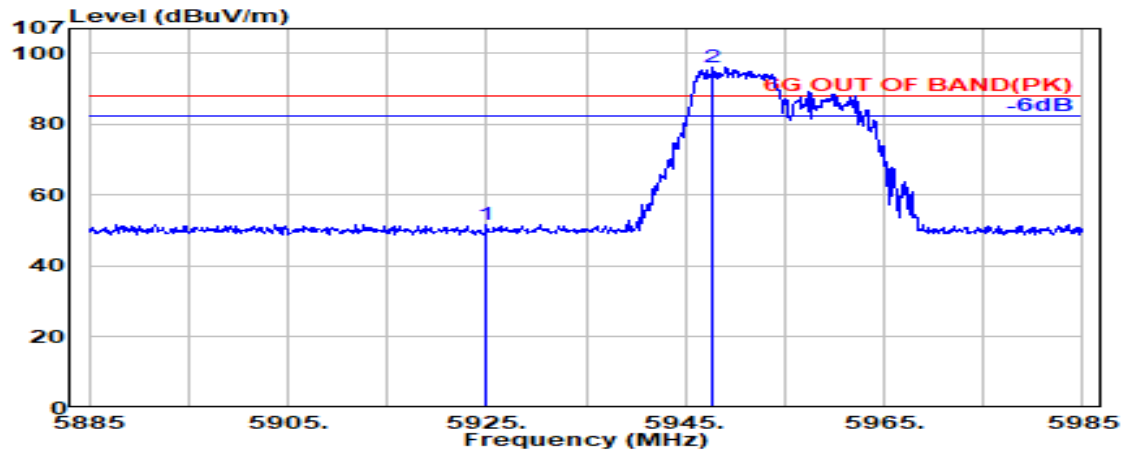

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.69             | 51.51                   | 88.20           | 36.69       | Peak     |
| @ 5947.800               | 34.29                 | 9.00            | 34.38                  | 87.29             | 96.20                   | ---             | ---         | Peak     |

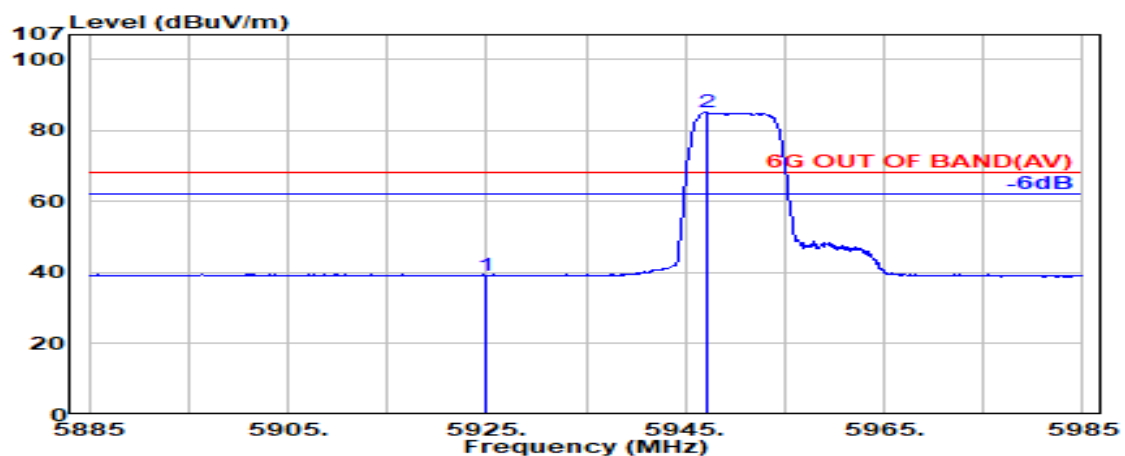

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.25             | 39.08                   | 68.20           | 29.12       | Average  |
| @ 5947.200               | 34.29                 | 9.00            | 34.38                  | 76.29             | 85.20                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 60         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

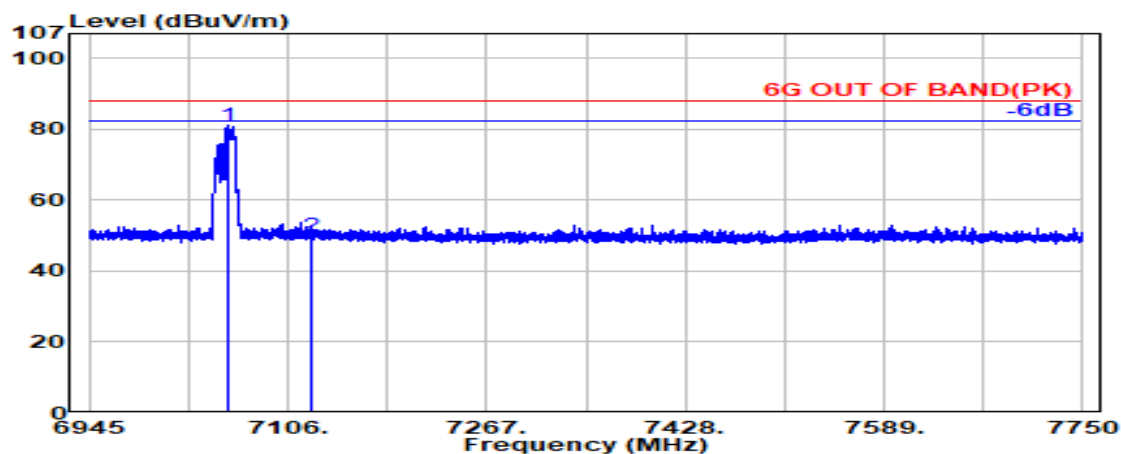

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7057.900               | 35.63                 | 9.76            | 34.44                  | 70.05             | 80.99                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.85             | 50.06                   | 88.20           | 38.14       | Peak     |

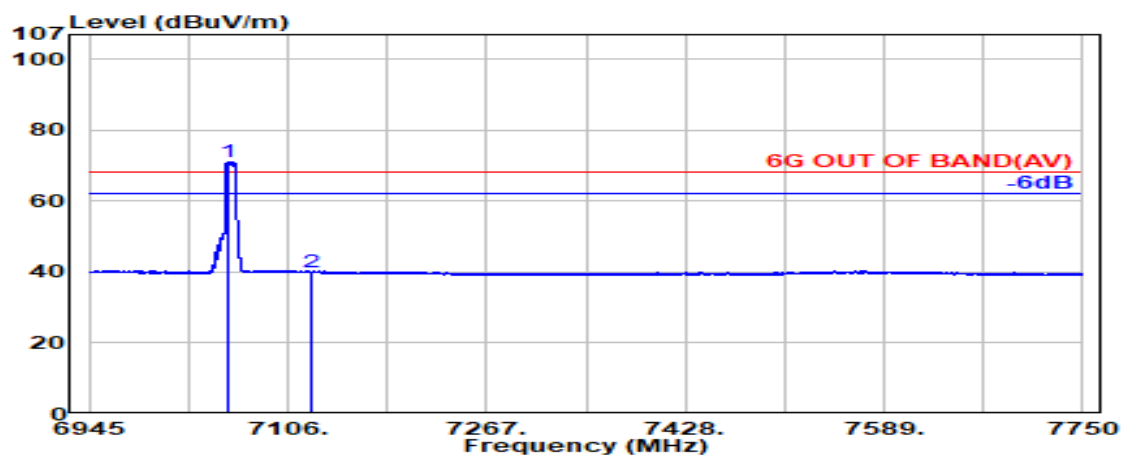

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7057.000               | 35.63                 | 9.76            | 34.44                  | 60.16             | 71.10                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.80             | 40.01                   | 68.20           | 28.19       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 106T          | RU Index   | 60         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

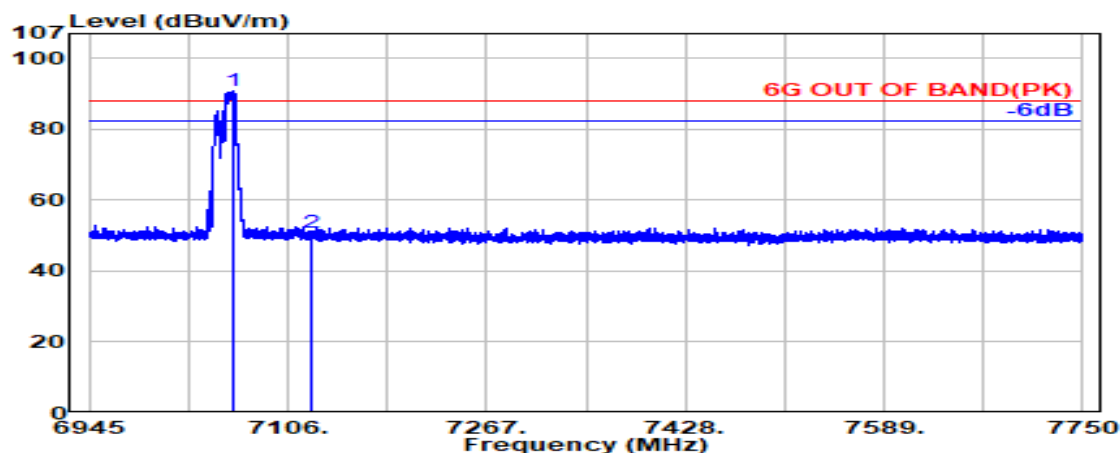

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.300               | 35.65                 | 9.76            | 34.44                  | 80.08             | 91.04                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.48             | 50.69                   | 88.20           | 37.51       | Peak     |

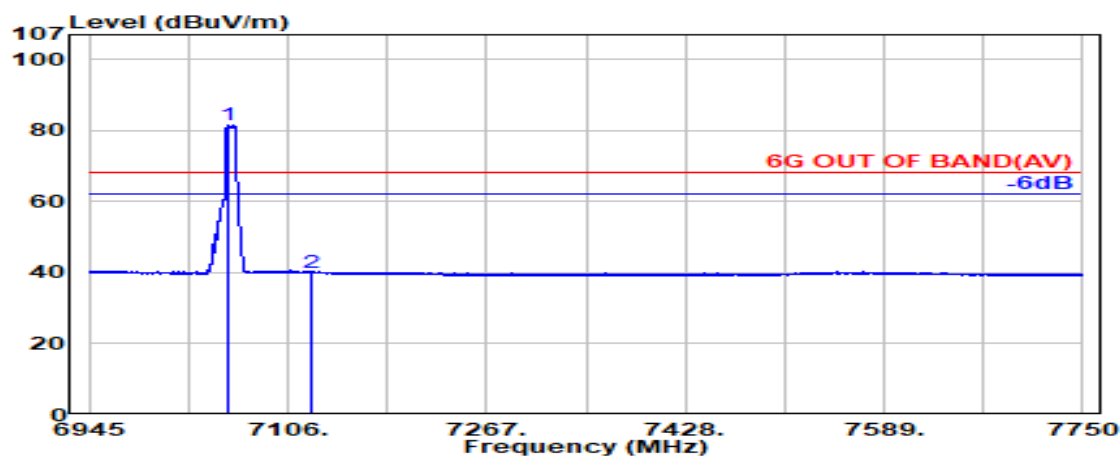

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7058.300               | 35.63                 | 9.76            | 34.44                  | 70.67             | 81.62                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.74             | 39.95                   | 58.20           | 18.25       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

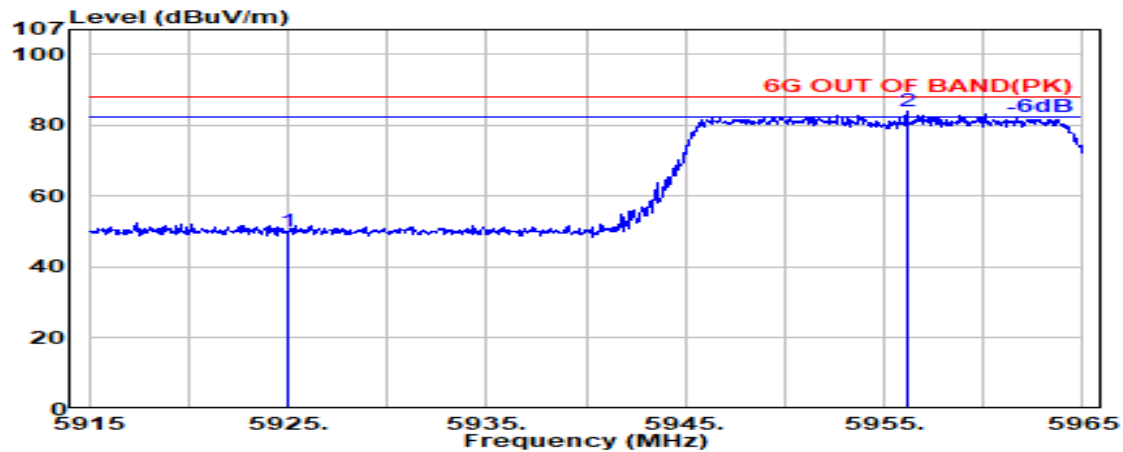

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.44             | 50.26                   | 88.20           | 37.94       | Peak     |
| @ 5956.150               | 34.29                 | 9.01            | 34.38                  | 75.22             | 84.14                   | ---             | ---         | Peak     |

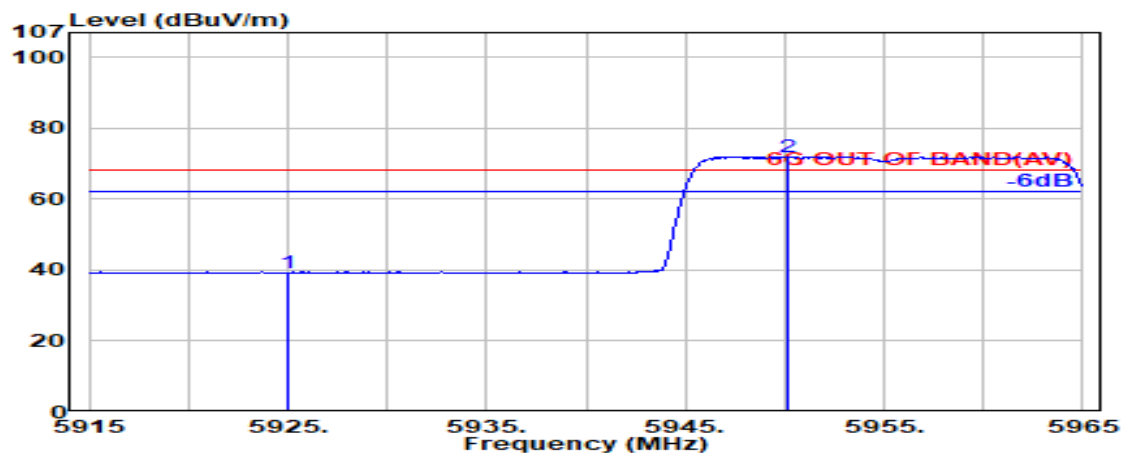

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.39             | 39.21                   | 68.20           | 28.99       | Average  |
| @ 5950.100               | 34.30                 | 9.00            | 34.38                  | 63.03             | 71.95                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 61         |
| Mode  | 802.11ax-HE20 | U-NII Band | 5          |
|       |               | Frequency  | TX 5955MHz |

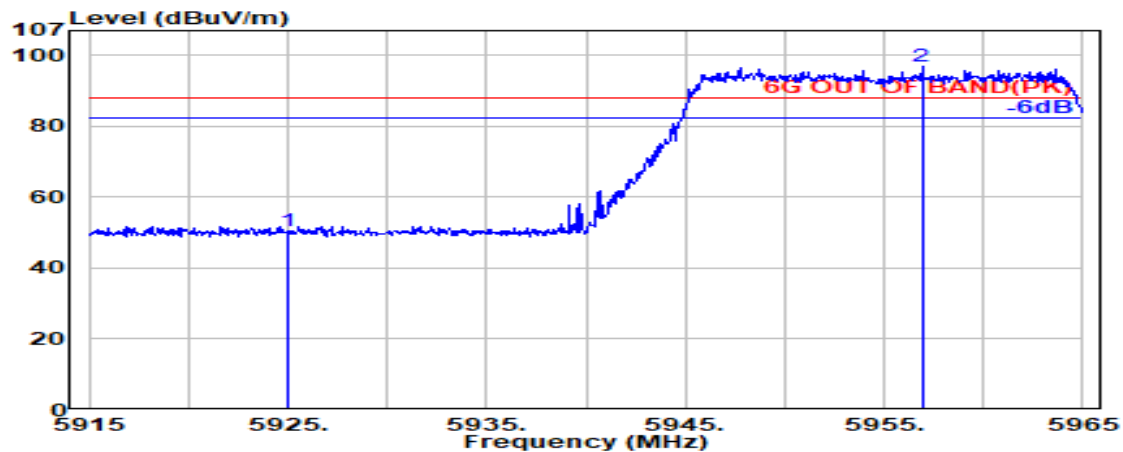

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.46             | 50.28                   | 88.20           | 37.92       | Peak     |
| @ 5956.900               | 34.29                 | 9.01            | 34.38            | 87.94             | 96.85                   | ---             | ---         | Peak     |

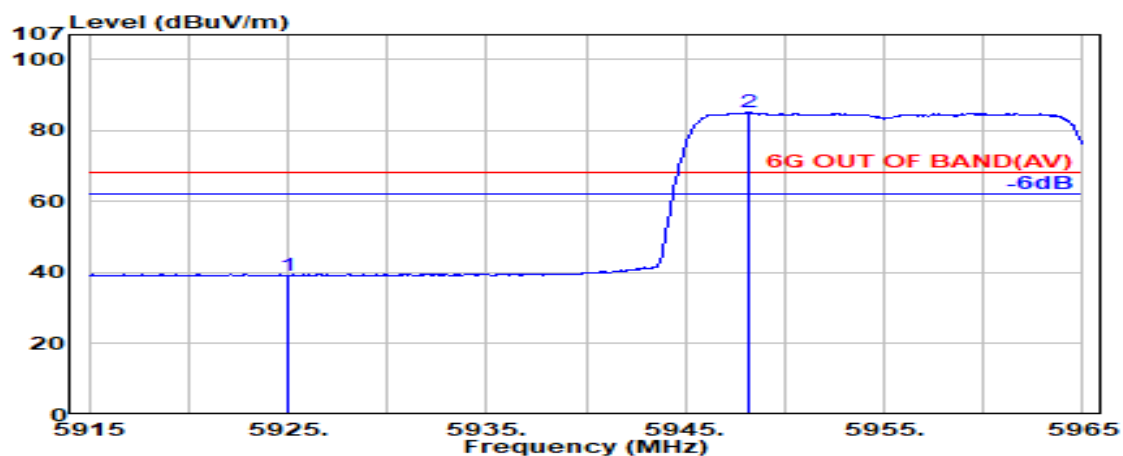

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.50             | 39.32                   | 68.20           | 28.88       | Average  |
| @ 5948.200               | 34.29                 | 9.00            | 34.38            | 76.29             | 85.20                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel:** +886 2 26099301


**Fax:** +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 64         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

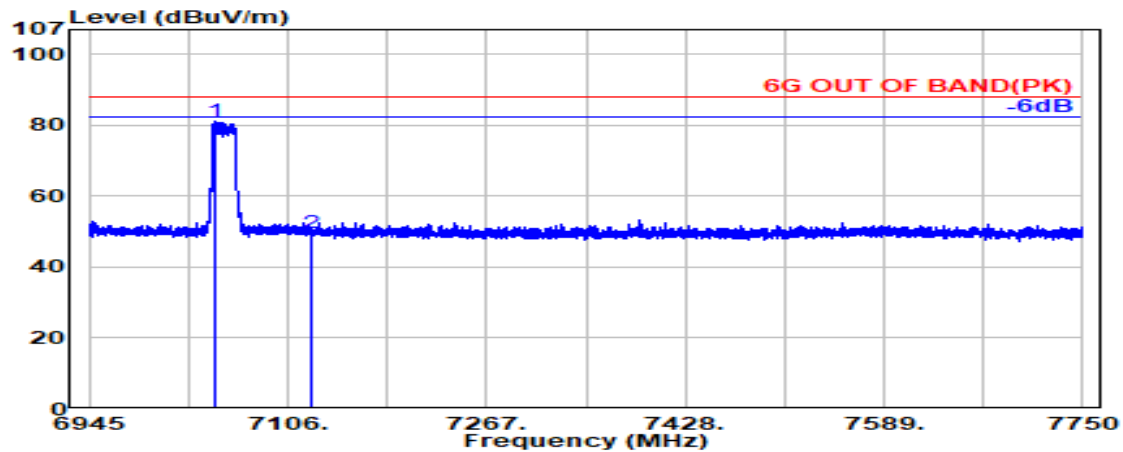

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7046.100               | 35.59                 | 9.75            | 34.43            | 70.11             | 81.02                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.38             | 49.59                   | 88.20           | 38.61       | Peak     |

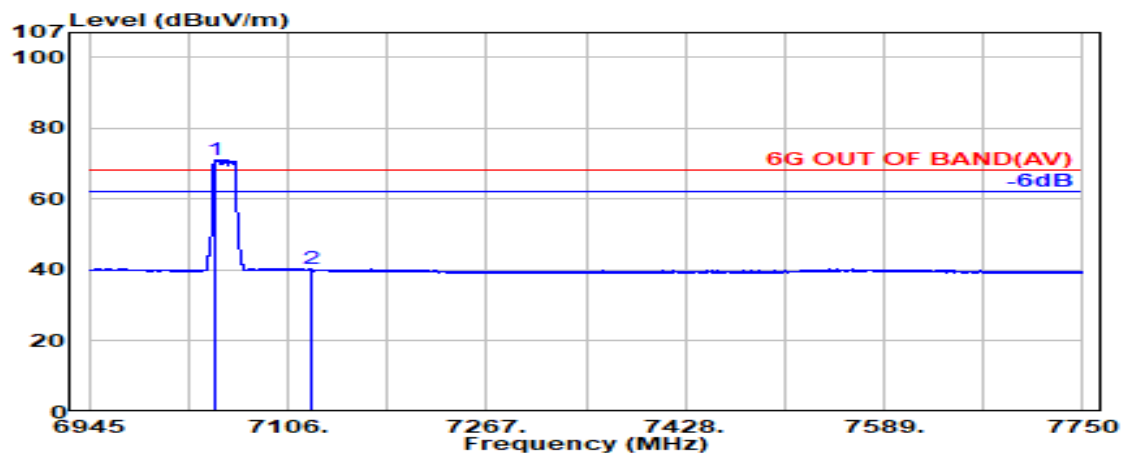

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7046.700               | 35.59                 | 9.75            | 34.43            | 60.22             | 71.13                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.99             | 40.20                   | 68.20           | 28.00       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 242T          | RU Index   | 64         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

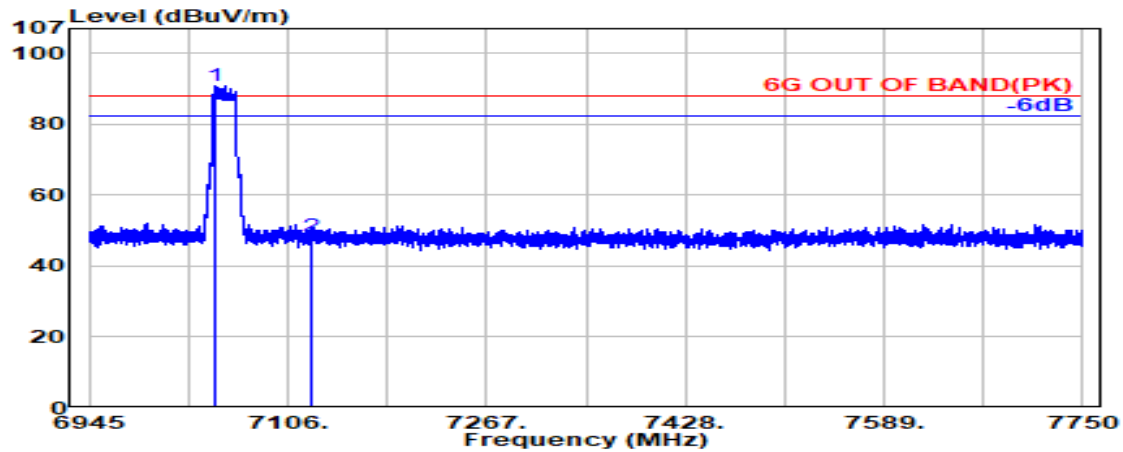

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7046.800               | 35.59                 | 9.75            | 34.43                  | 80.03             | 90.94                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 37.11             | 48.32                   | 88.20           | 39.88       | Peak     |

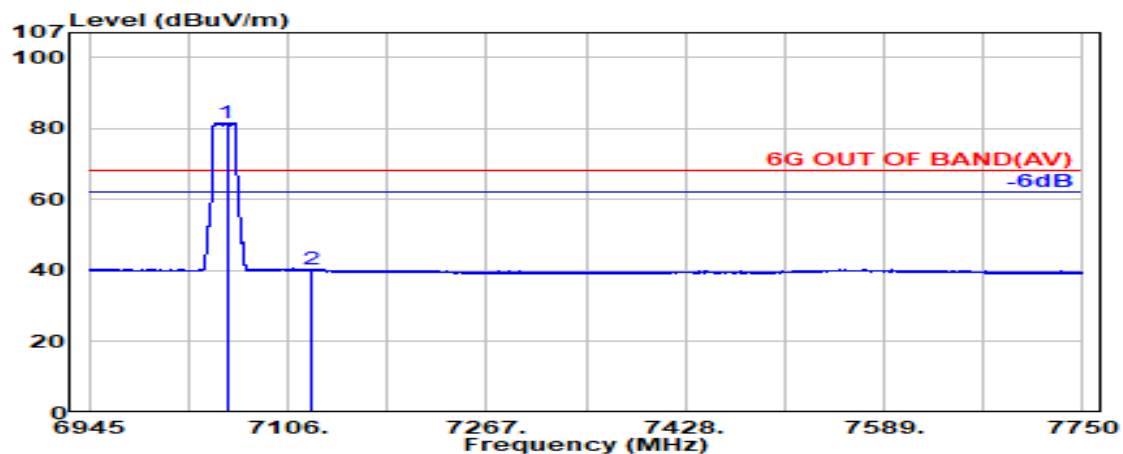

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7056.500               | 35.63                 | 9.76            | 34.44                  | 70.78             | 81.72                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.96             | 40.18                   | 68.20           | 28.02       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |           |
|-------|---------------|------------|-----------|
| Tones | 484T          | RU Index   | 65        |
| Mode  | 802.11ax-HE40 | U-NII Band | 5         |
|       |               | Frequency  | TX5965MHz |

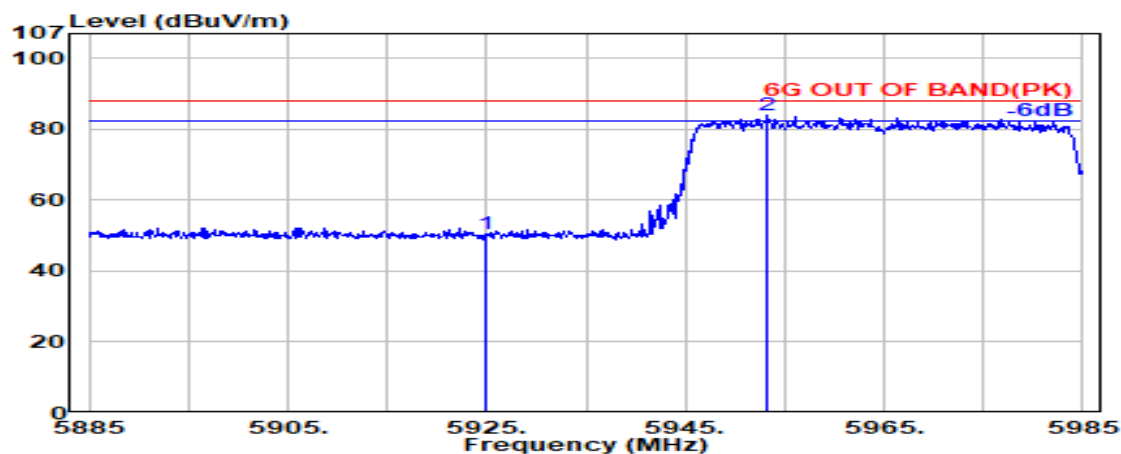

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.67             | 50.49                   | 88.20           | 37.71       | Peak     |
| @ 5953.300               | 34.29                 | 9.01            | 34.38                  | 75.16             | 84.07                   | ---             | ---         | Peak     |

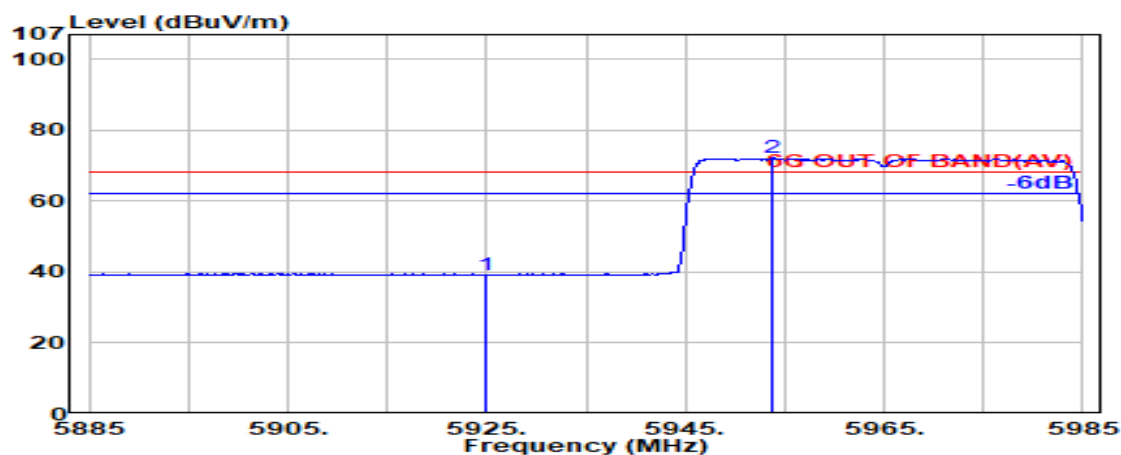

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.42             | 39.24                   | 68.20           | 28.96       | Average  |
| @ 5953.800               | 34.29                 | 9.01            | 34.38                  | 63.37             | 72.29                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |               |            |           |
|-------|---------------|------------|-----------|
| Tones | 484T          | RU Index   | 65        |
| Mode  | 802.11ax-HE40 | U-NII Band | 5         |
|       |               | Frequency  | TX5965MHz |

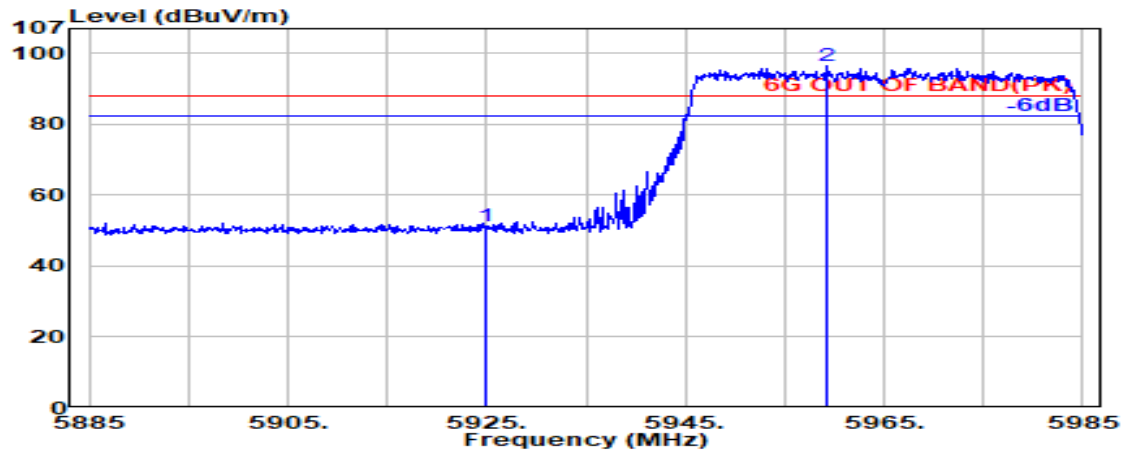

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 42.27             | 51.09                   | 88.20           | 37.11       | Peak     |
| @ 5959.200               | 34.28                 | 9.01            | 34.38            | 87.65             | 96.56                   | ---             | ---         | Peak     |

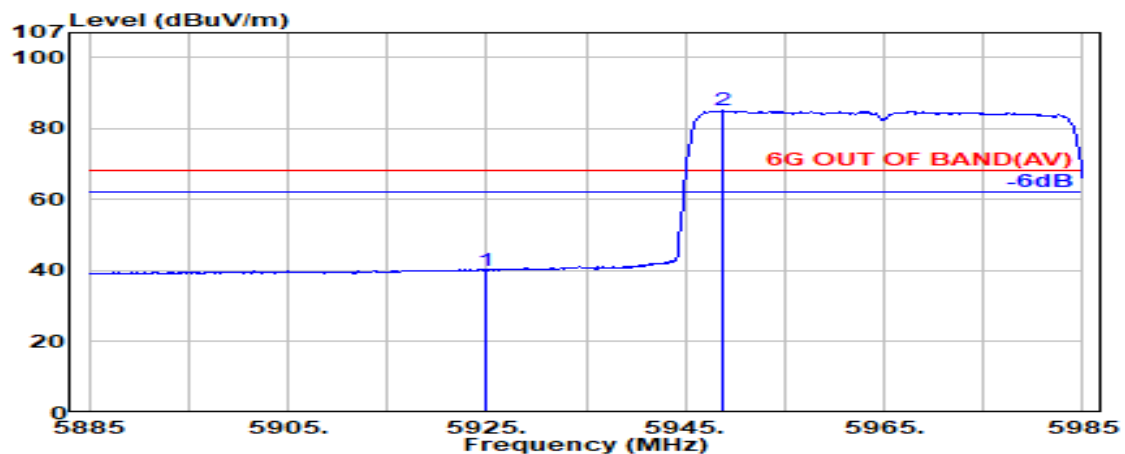

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 31.17             | 39.99                   | 68.20           | 28.21       | Average  |
| @ 5948.800               | 34.30                 | 9.00            | 34.38            | 76.08             | 85.00                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 66         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

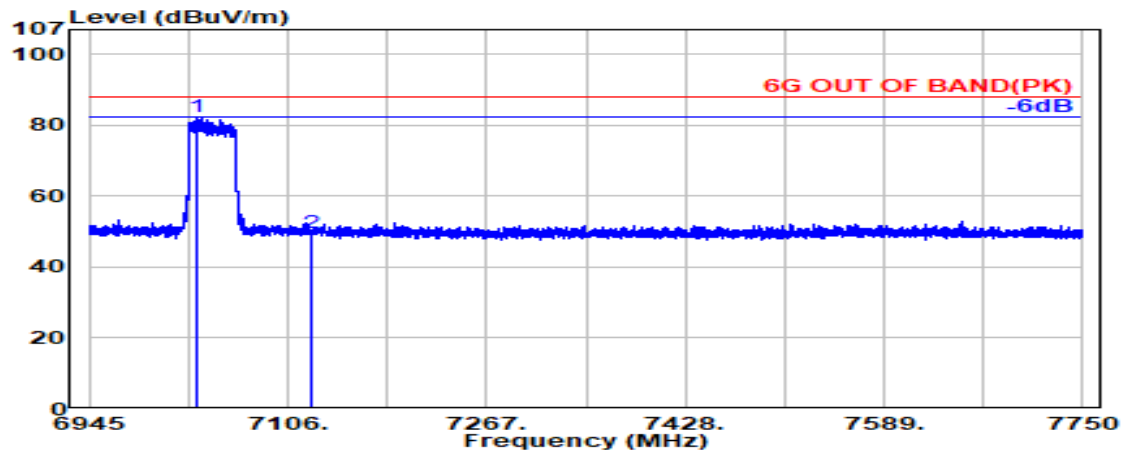

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7032.900               | 35.57                 | 9.74            | 34.42                  | 71.45             | 82.33                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.30             | 49.51                   | 88.20           | 38.69       | Peak     |

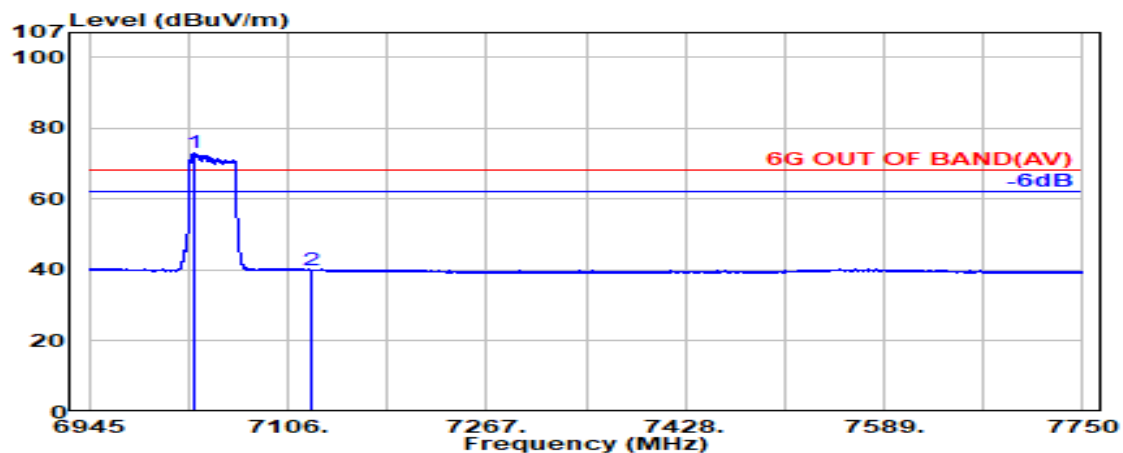

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7029.400               | 35.56                 | 9.74            | 34.42                  | 62.13             | 73.01                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.73             | 39.94                   | 68.20           | 28.26       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 484T          | RU Index   | 66         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

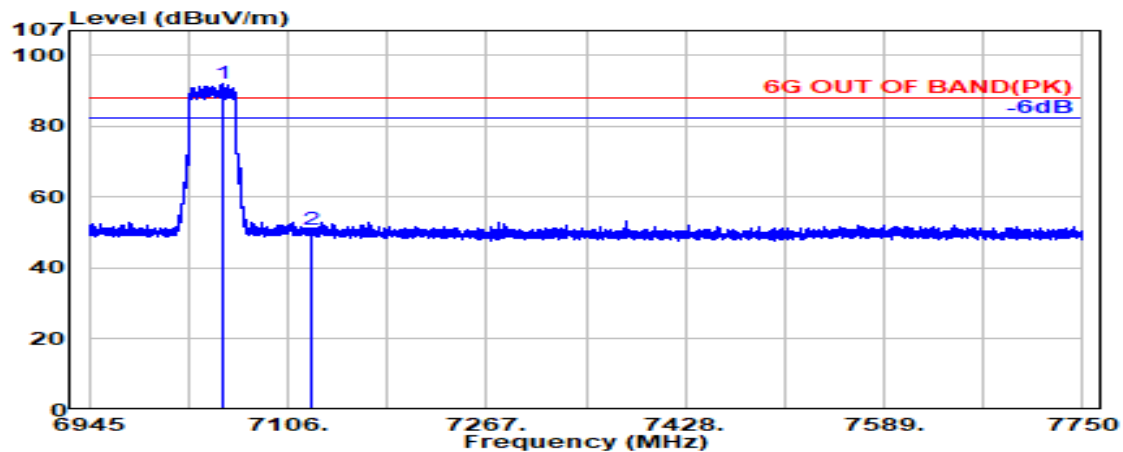

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7053.400               | 35.61                 | 9.75            | 34.44                  | 81.30             | 92.23                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.71             | 50.93                   | 88.20           | 37.27       | Peak     |

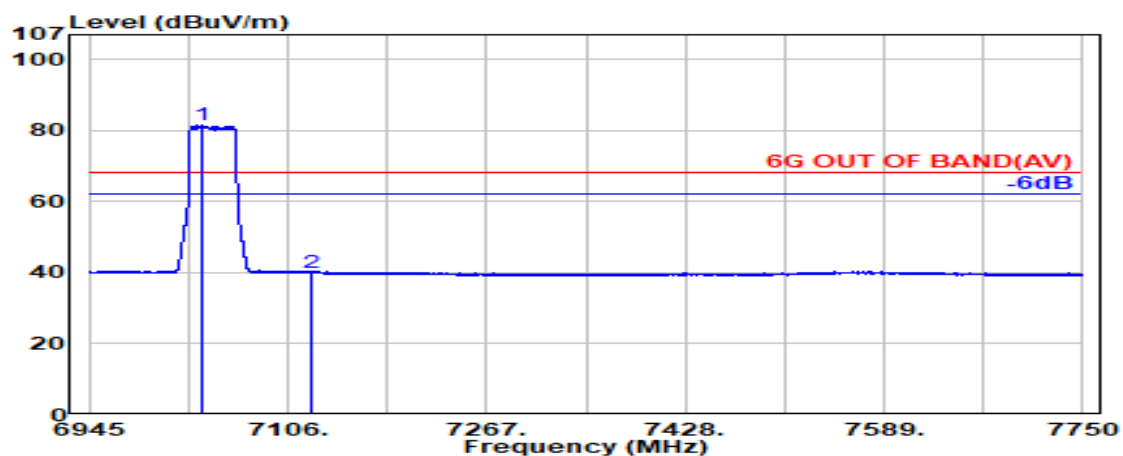

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7037.300               | 35.57                 | 9.74            | 34.43                  | 70.64             | 81.53                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.96             | 40.17                   | 68.20           | 28.03       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

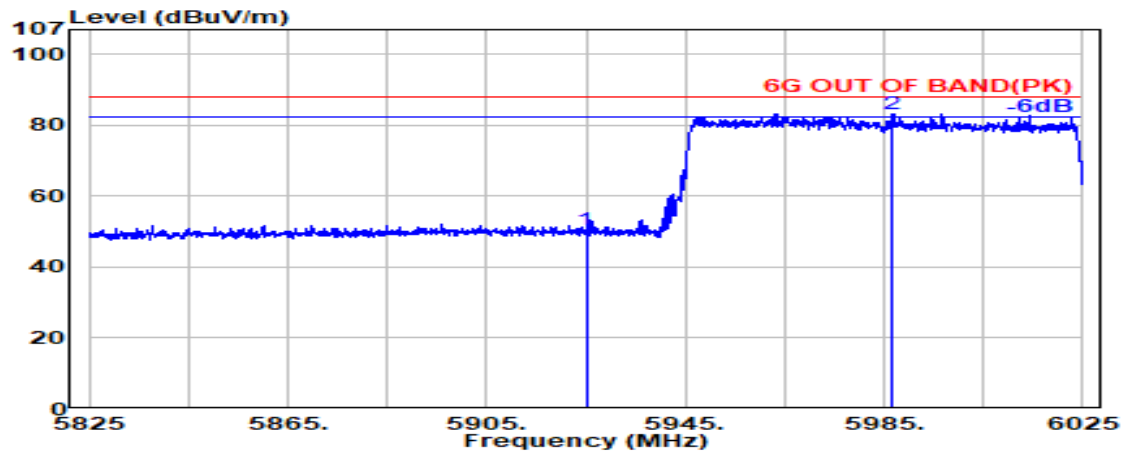

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.78             | 50.61                   | 88.20           | 37.59       | Peak     |
| @ 5986.800               | 34.23                 | 9.02            | 34.39                  | 74.33             | 83.18                   | ---             | ---         | Peak     |

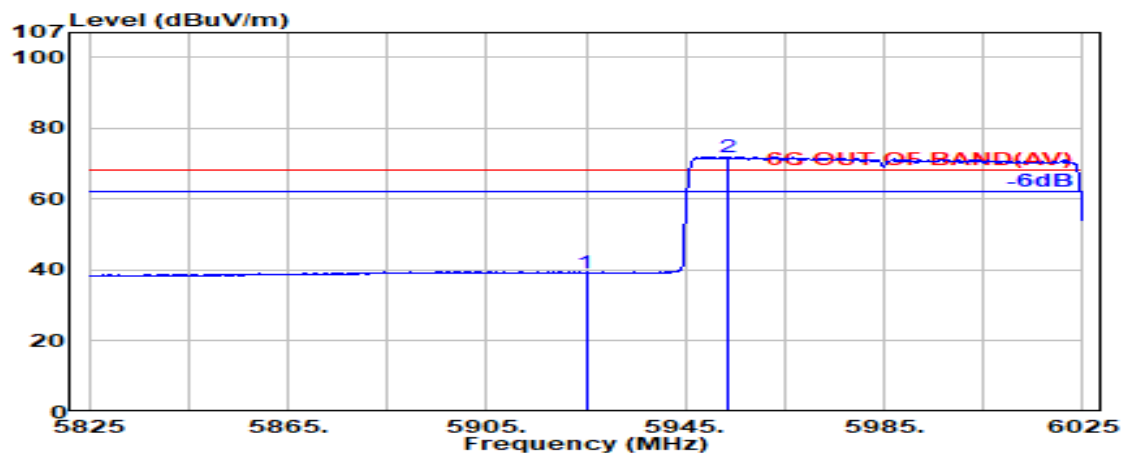

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.40             | 39.23                   | 68.20           | 28.97       | Average  |
| @ 5953.600               | 34.29                 | 9.01            | 34.38                  | 63.15             | 72.07                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 5          |
|       |               | Frequency  | TX 5985MHz |

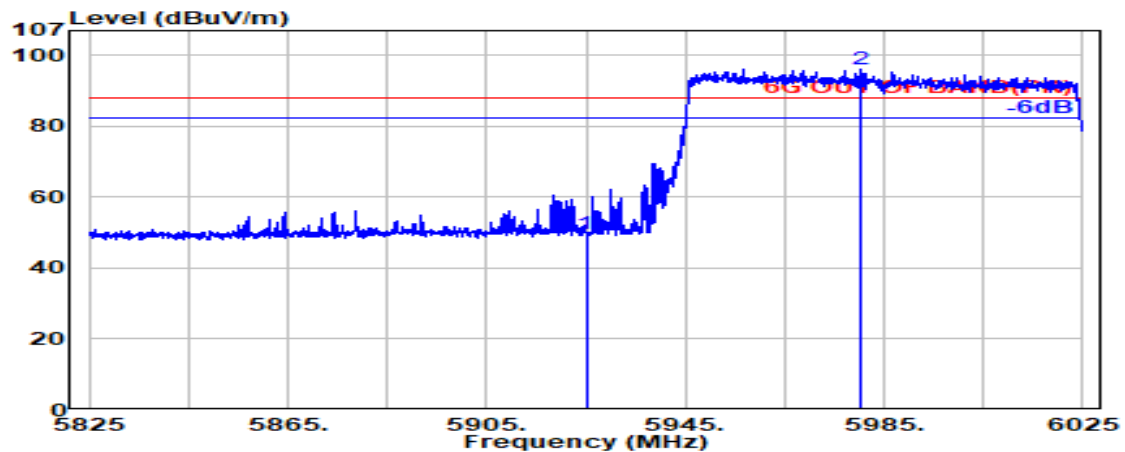

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.71             | 49.53                   | 88.20           | 38.67       | Peak     |
| @ 5980.200               | 34.24                 | 9.02            | 34.39            | 87.19             | 96.05                   | ---             | ---         | Peak     |

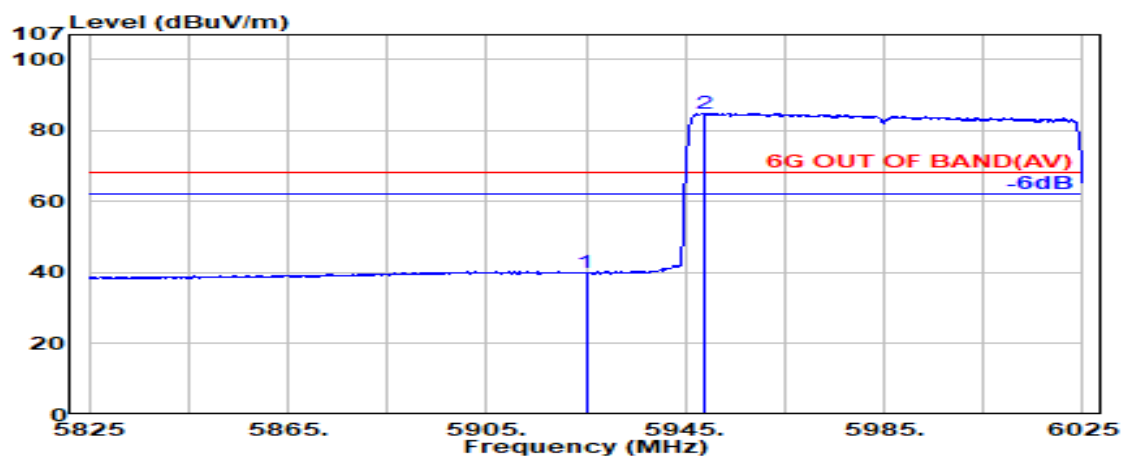

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 31.23             | 40.05                   | 68.20           | 28.15       | Average  |
| @ 5948.600               | 34.29                 | 9.00            | 34.38            | 75.96             | 84.88                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |               |            |            |
|-------|---------------|------------|------------|
| Tones | 996T          | RU Index   | 67         |
| Mode  | 802.11ax-HE80 | U-NII Band | 8          |
|       |               | Frequency  | TX 7025MHz |

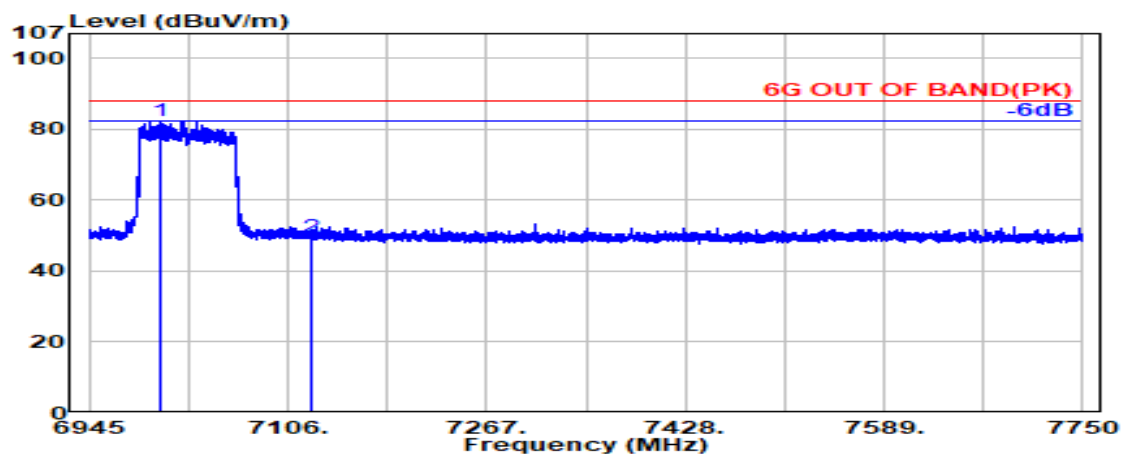

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7003.200               | 35.51                 | 9.72            | 34.40                  | 71.70             | 82.52                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.41             | 49.62                   | 88.20           | 38.58       | Peak     |

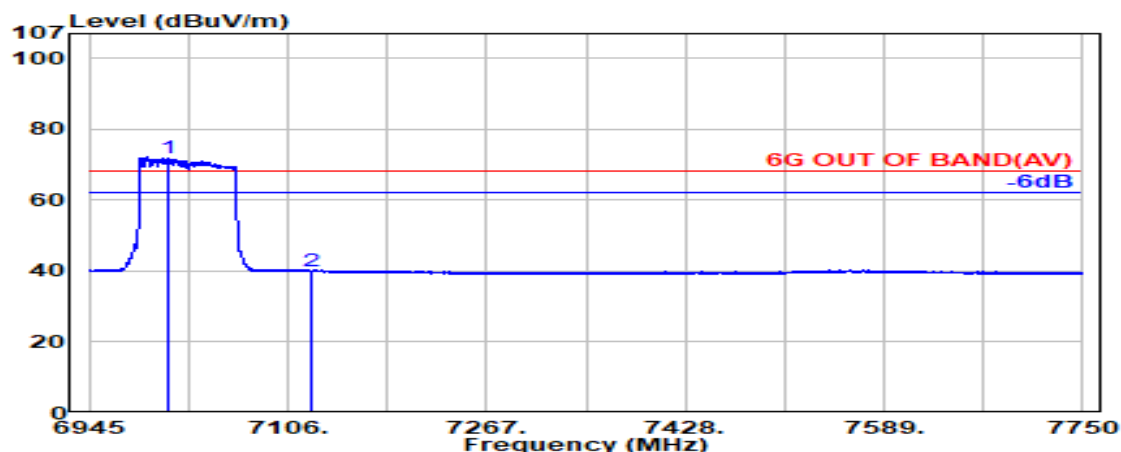

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.100               | 35.52                 | 9.73            | 34.41                  | 60.89             | 71.72                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.78             | 39.99                   | 68.20           | 28.21       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11ax-HE180 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

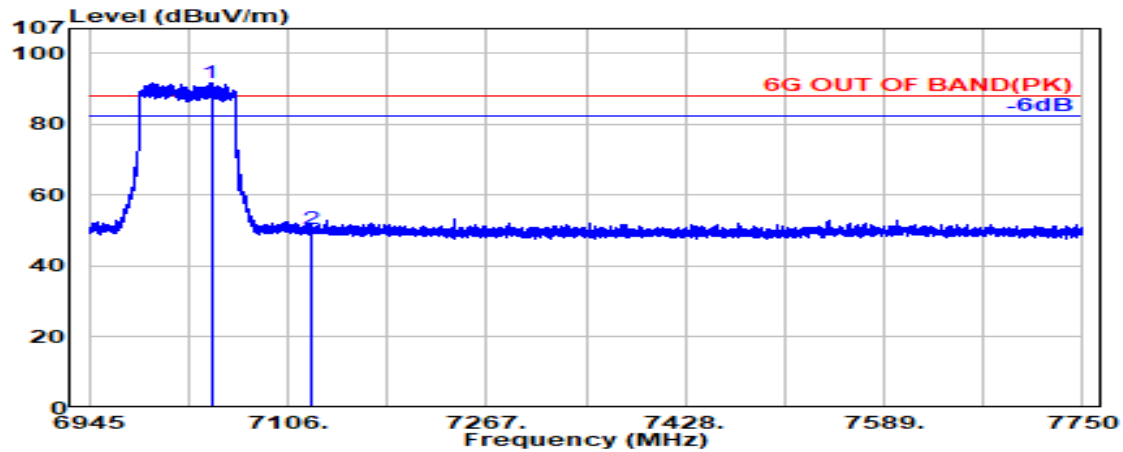

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7043.900               | 35.59                 | 9.75            | 34.43            | 80.76             | 91.67                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.28             | 50.49                   | 88.20           | 37.71       | Peak     |

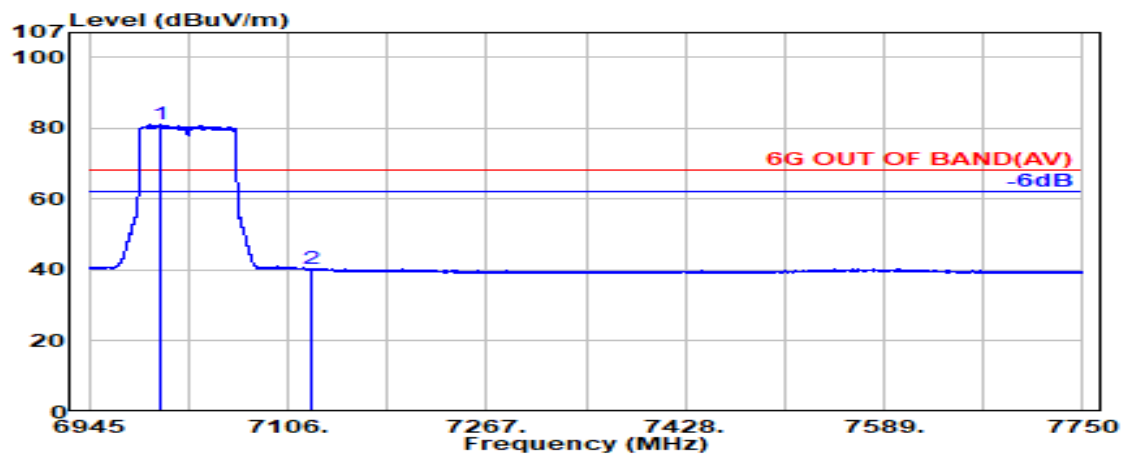

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7003.200               | 35.51                 | 9.72            | 34.40            | 70.19             | 81.02                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.97             | 40.18                   | 68.20           | 28.02       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | 0          |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

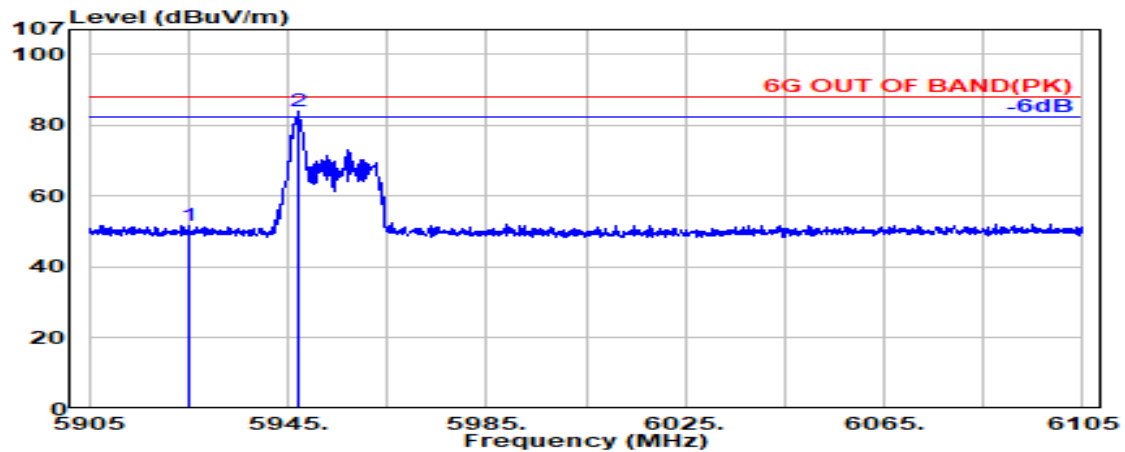

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.97             | 51.79                   | 88.20           | 36.41       | Peak     |
| @ 5947.200               | 34.29                 | 9.00            | 34.38                  | 75.09             | 84.00                   | ---             | ---         | Peak     |

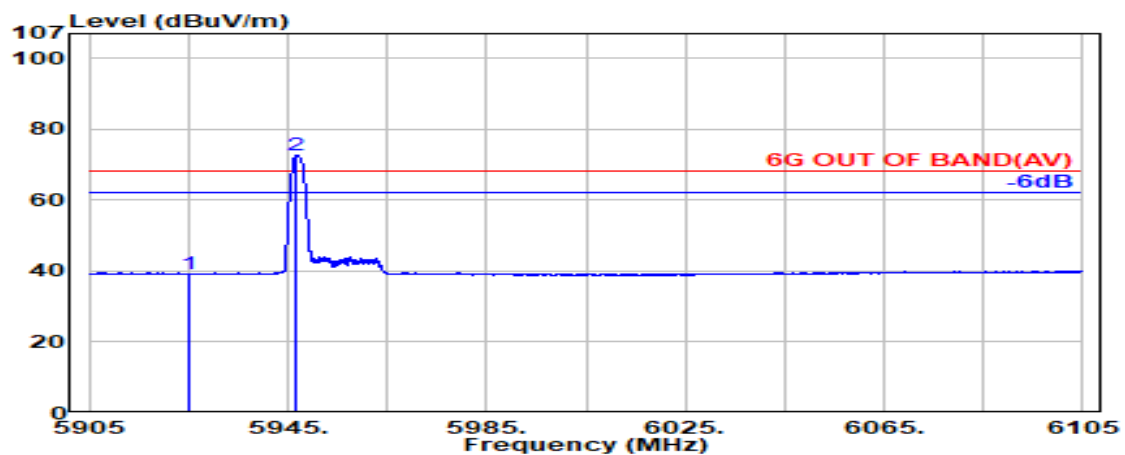

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.35             | 39.17                   | 68.20           | 29.03       | Average  |
| @ 5946.800               | 34.29                 | 9.00            | 34.38                  | 63.64             | 72.55                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | 0          |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

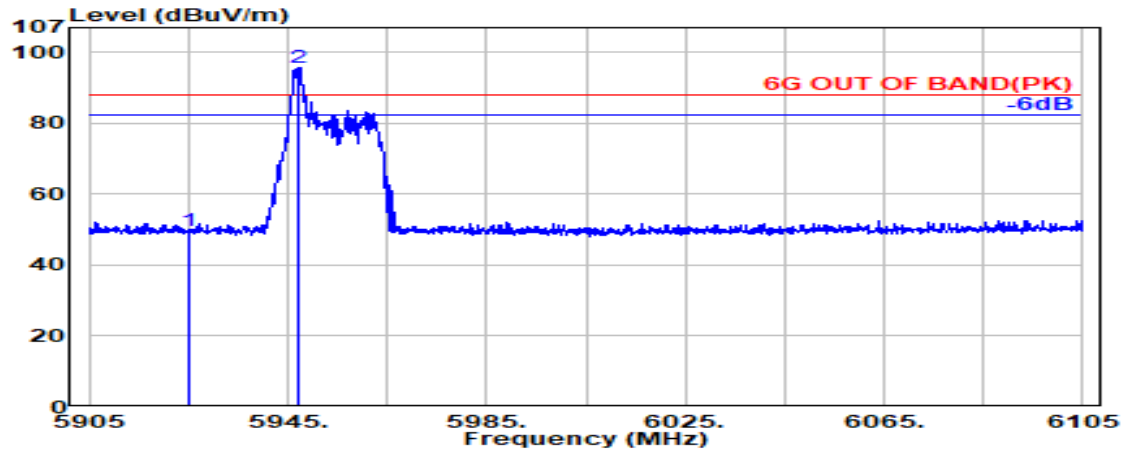

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.69             | 49.51                   | 88.20           | 38.69       | Peak     |
| @ 5946.900               | 34.29                 | 9.00            | 34.38                  | 86.71             | 95.62                   | ---             | ---         | Peak     |

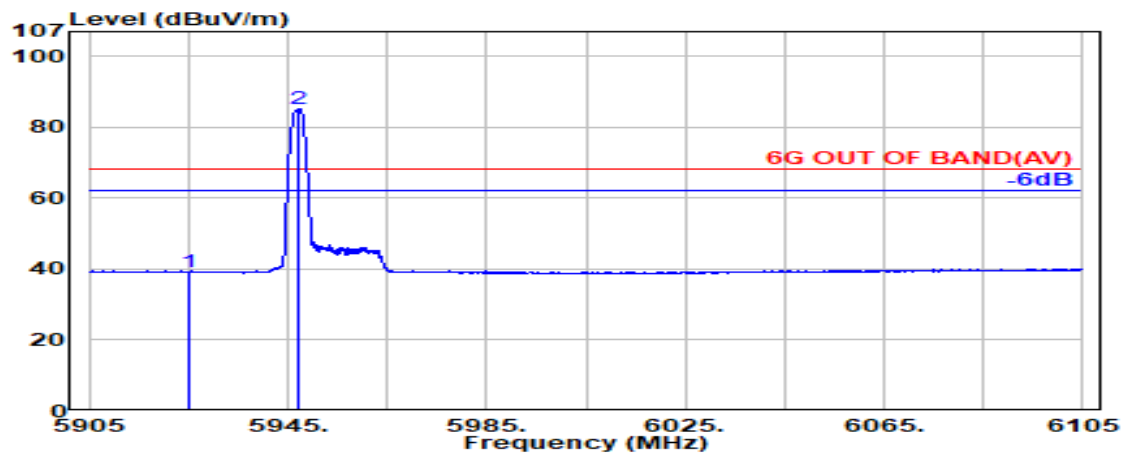

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.40             | 39.23                   | 68.20           | 28.97       | Average  |
| @ 5947.300               | 34.29                 | 9.00            | 34.38                  | 76.23             | 85.15                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | W36        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

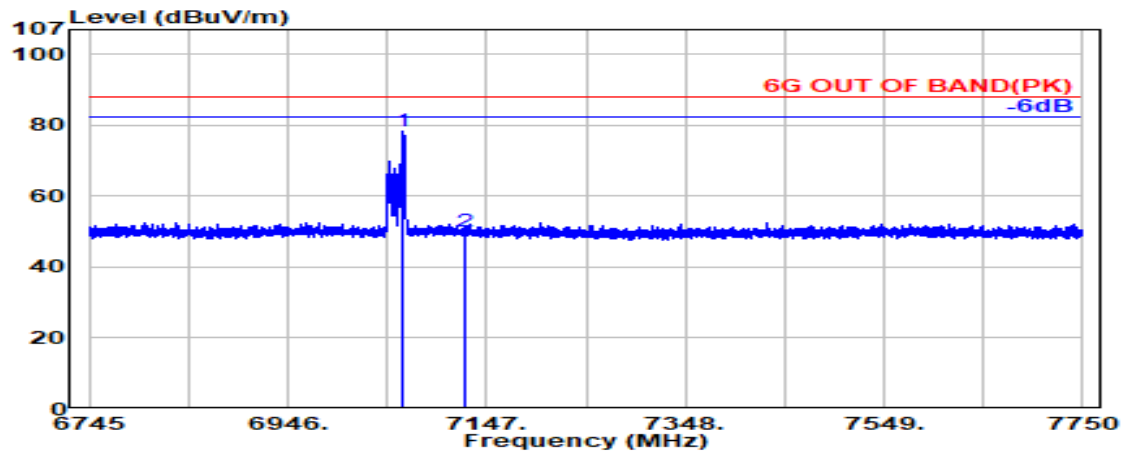

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.438                 | 35.65                 | 9.76            | 34.45            | 67.20             | 78.17                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49            | 39.00             | 50.21                   | 88.20           | 37.99       | Peak     |

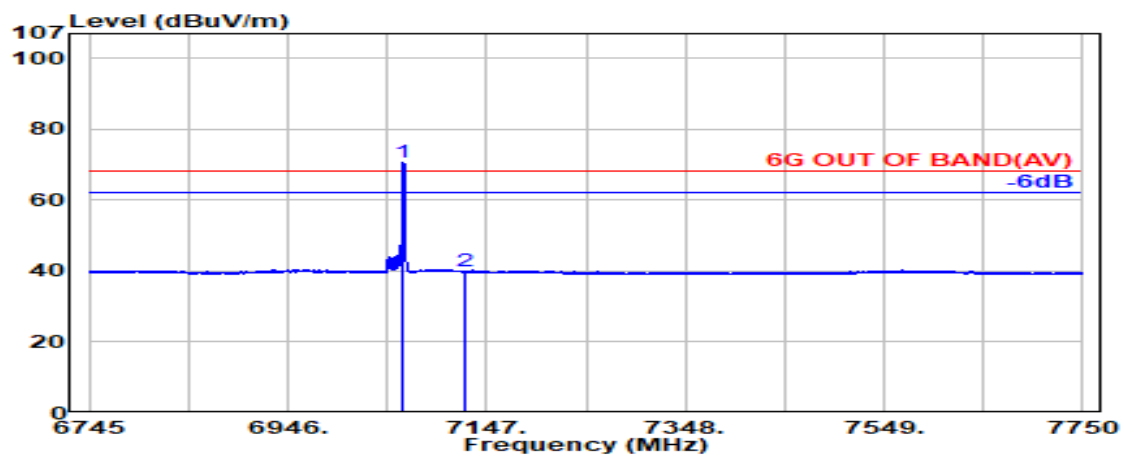

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7063.032                 | 35.65                 | 9.76            | 34.45            | 59.74             | 70.70                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49            | 28.73             | 39.95                   | 68.20           | 28.25       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 26T             | RU Index   | W36        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

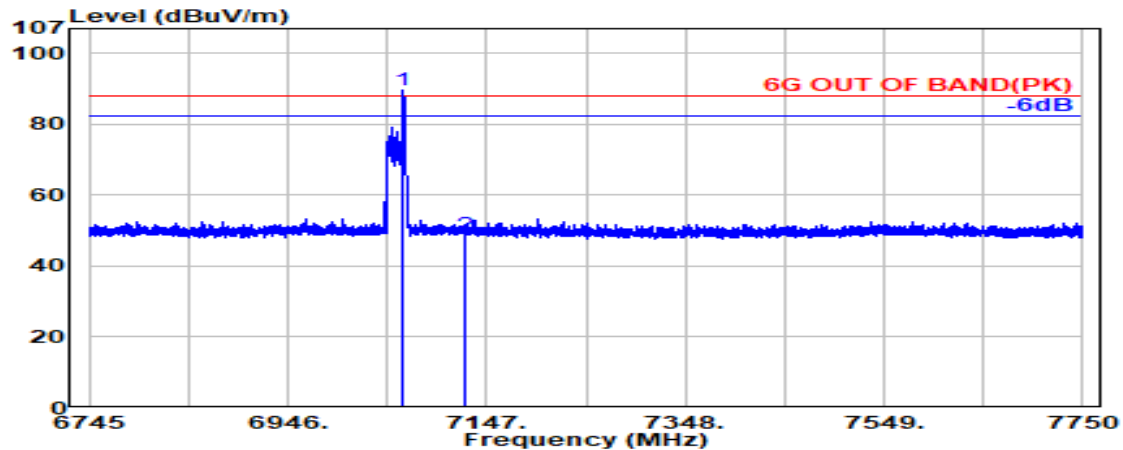

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7062.913                 | 35.65                 | 9.76            | 34.45                  | 78.69             | 89.65                   | ---             | ---         | Peak     |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 37.47             | 48.69                   | 88.20           | 39.51       | Peak     |

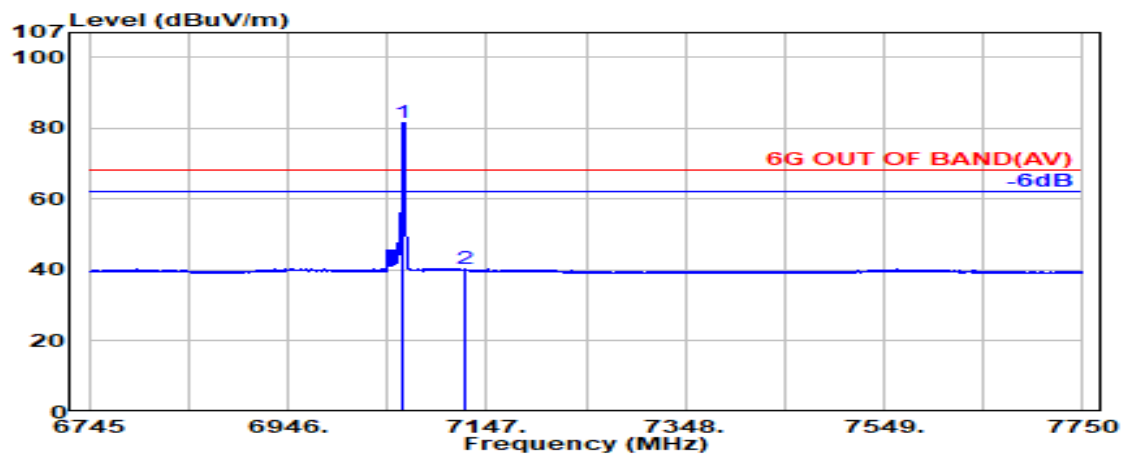

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 7063.151                 | 35.65                 | 9.76            | 34.45                  | 70.55             | 81.52                   | ---             | ---         | Average  |
| @ 7125.000               | 35.90                 | 9.80            | 34.49                  | 28.98             | 40.19                   | 68.20           | 28.01       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | 37         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

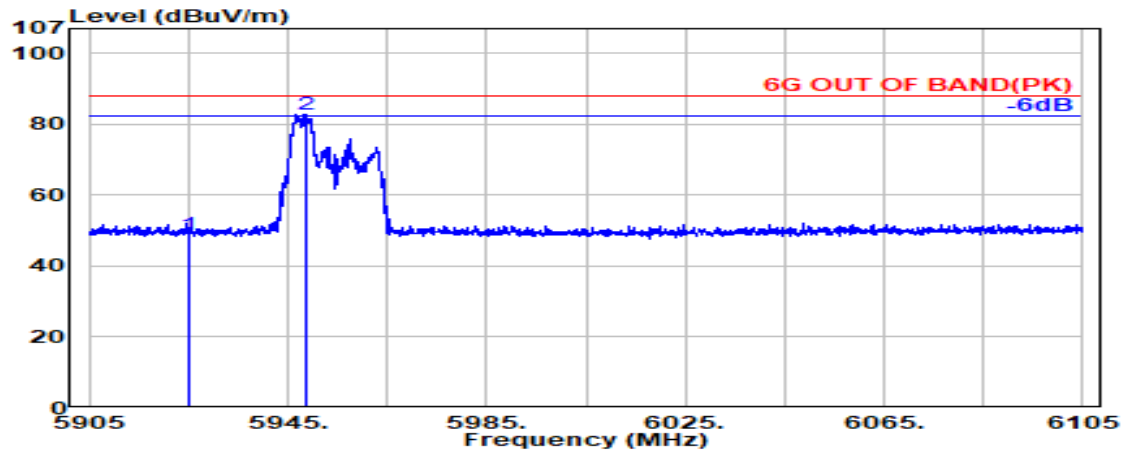

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 39.85             | 48.67                   | 88.20           | 39.53       | Peak     |
| @ 5948.900               | 34.30                 | 9.00            | 34.38                  | 74.05             | 82.97                   | ---             | ---         | Peak     |

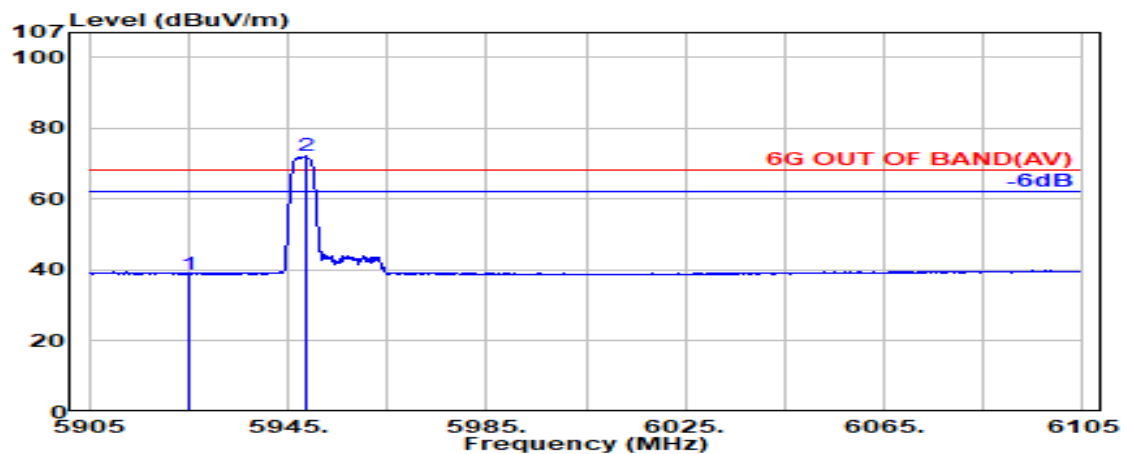

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.13             | 38.96                   | 68.20           | 29.24       | Average  |
| @ 5948.700               | 34.29                 | 9.00            | 34.38                  | 63.20             | 72.12                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | 37         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

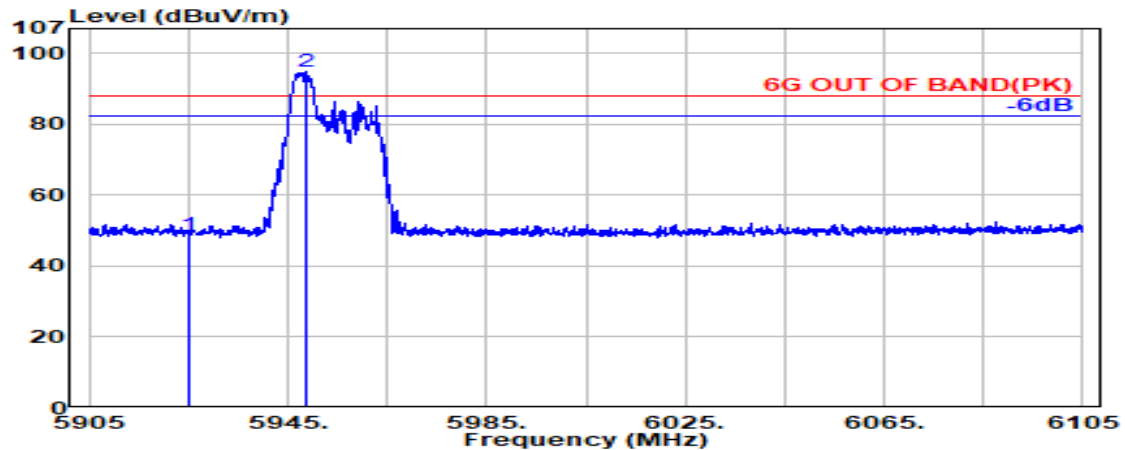

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.23             | 49.05                   | 88.20           | 39.15       | Peak     |
| @ 5948.700               | 34.29                 | 9.00            | 34.38            | 85.92             | 94.84                   | ---             | ---         | Peak     |

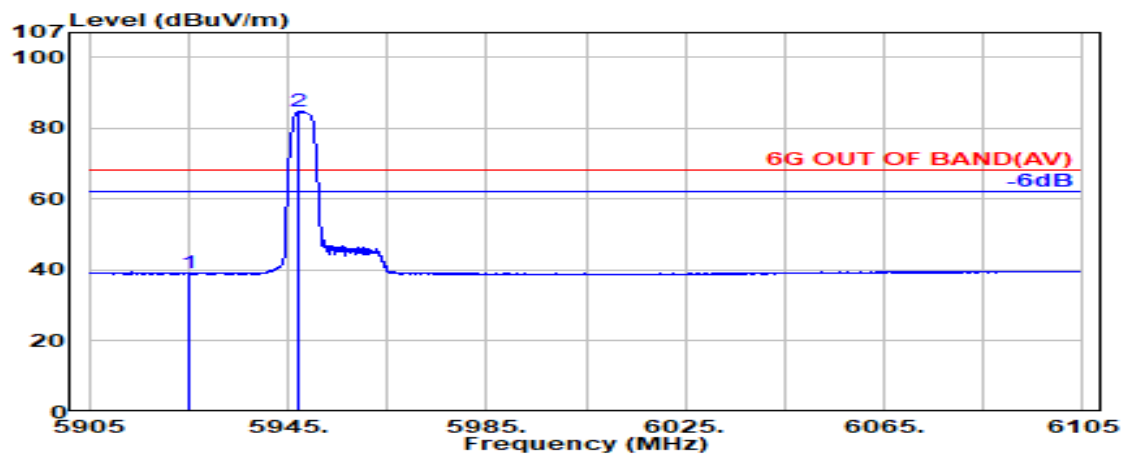

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.21             | 39.03                   | 68.20           | 29.17       | Average  |
| @ 5947.300               | 34.29                 | 9.00            | 34.38            | 75.85             | 84.76                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | W52        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

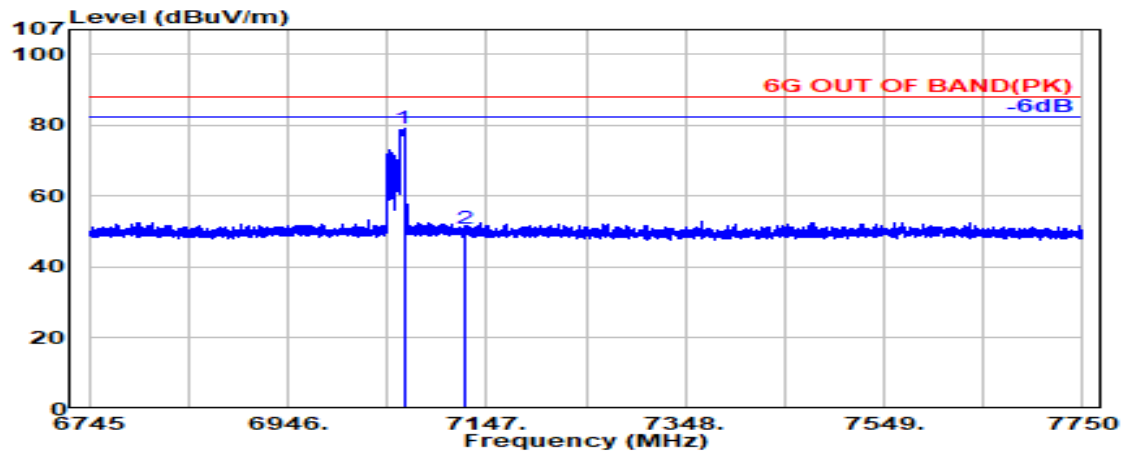

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7063.270               | 35.65                 | 9.76            | 34.45                  | 68.18             | 79.15                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.51             | 50.72                   | 88.20           | 37.48       | Peak     |

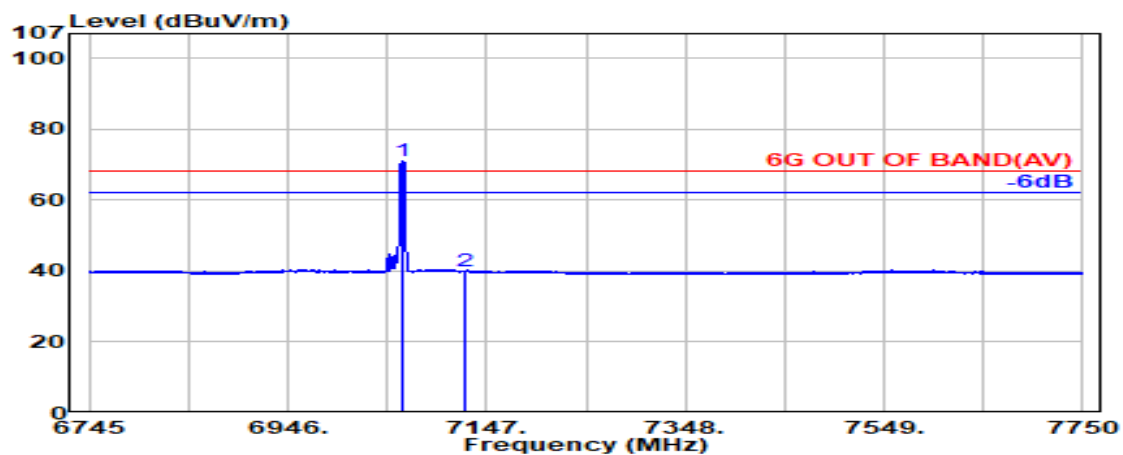

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.794               | 35.65                 | 9.76            | 34.45                  | 60.26             | 71.23                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.71             | 39.92                   | 68.20           | 28.28       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 52T             | RU Index   | W52        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

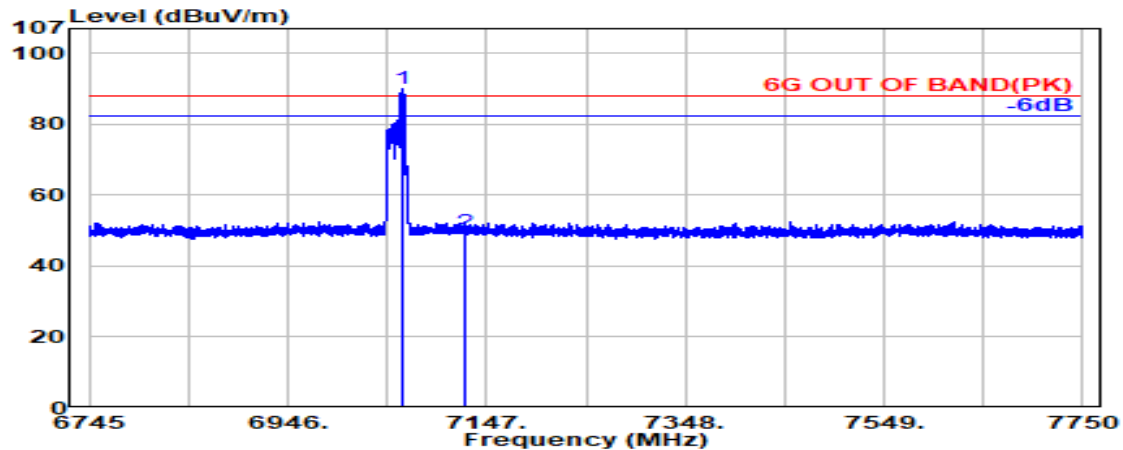

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.248               | 35.65                 | 9.76            | 34.44                  | 79.18             | 90.14                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.30             | 49.51                   | 88.20           | 38.69       | Peak     |

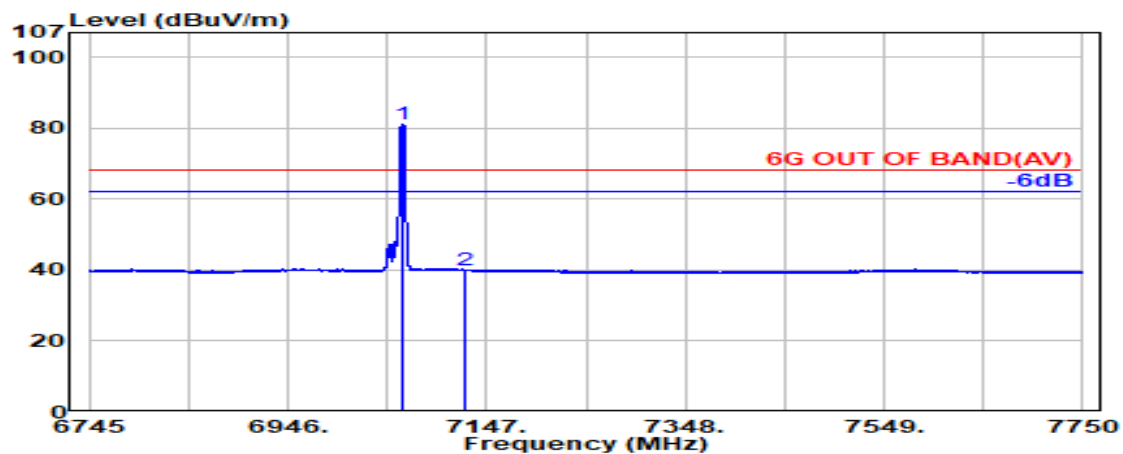

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.486               | 35.65                 | 9.76            | 34.44                  | 70.04             | 81.00                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.91             | 40.12                   | 68.20           | 28.08       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 53         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

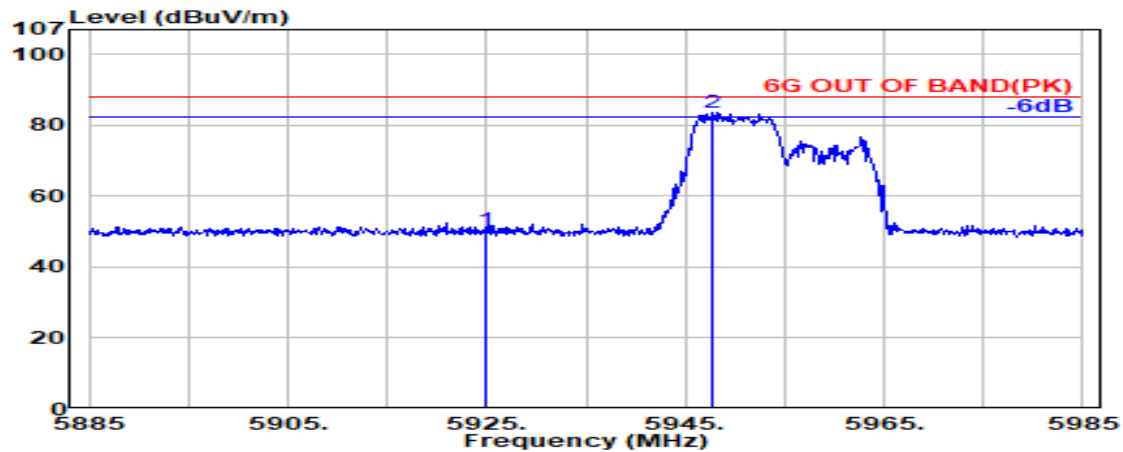

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.76             | 50.58                   | 88.20           | 37.62       | Peak     |
| @ 5947.800               | 34.29                 | 9.00            | 34.38                  | 74.80             | 83.72                   | ---             | ---         | Peak     |

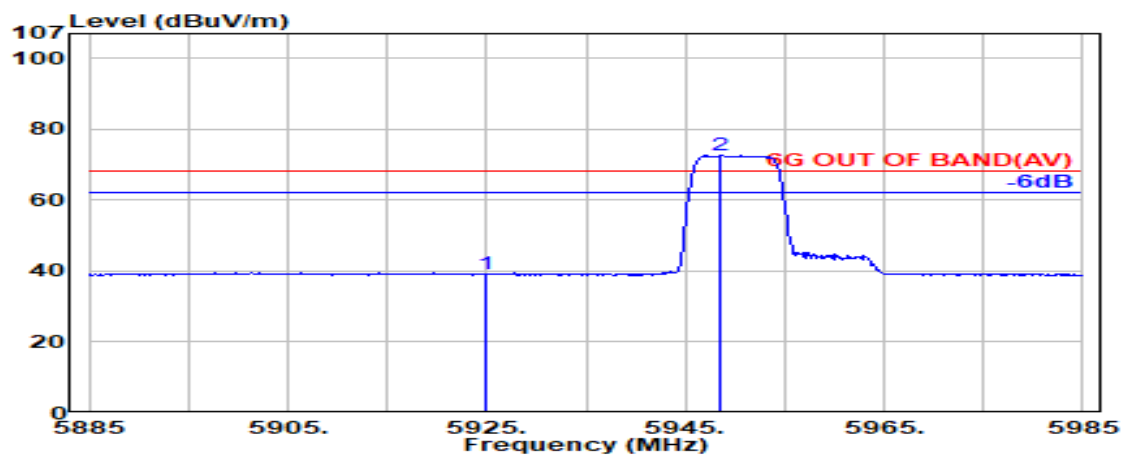

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.27             | 39.09                   | 68.20           | 29.11       | Average  |
| @ 5948.500               | 34.29                 | 9.00            | 34.38                  | 63.81             | 72.73                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 53         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

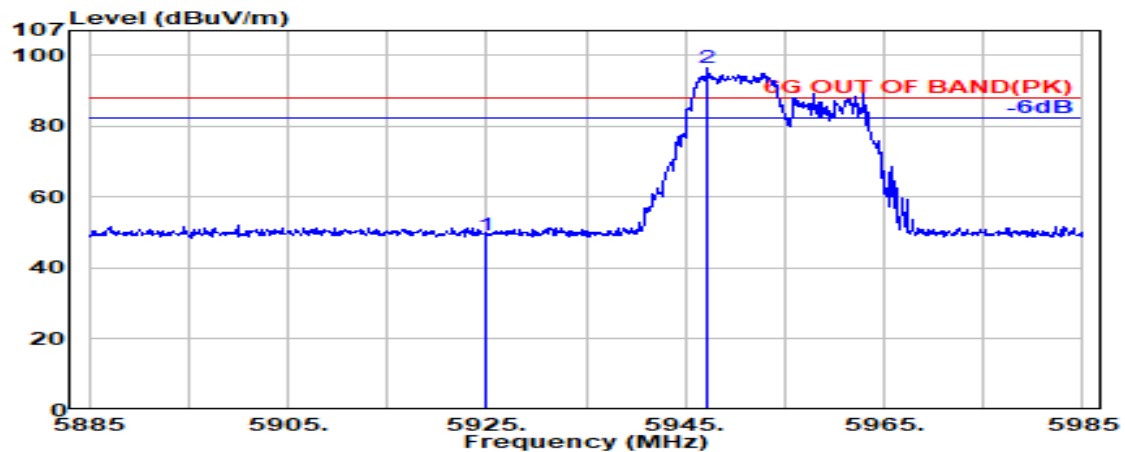

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.35             | 49.17                   | 88.20           | 39.03       | Peak     |
| @ 5947.300               | 34.29                 | 9.00            | 34.38                  | 87.55             | 96.47                   | ---             | ---         | Peak     |

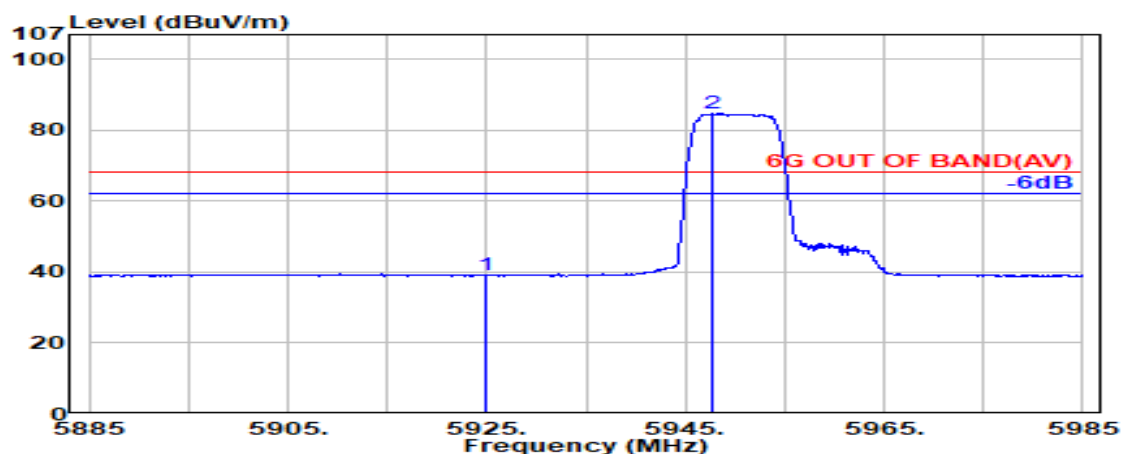

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.16             | 38.98                   | 68.20           | 29.22       | Average  |
| @ 5947.700               | 34.29                 | 9.00            | 34.38                  | 75.77             | 84.69                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 60         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

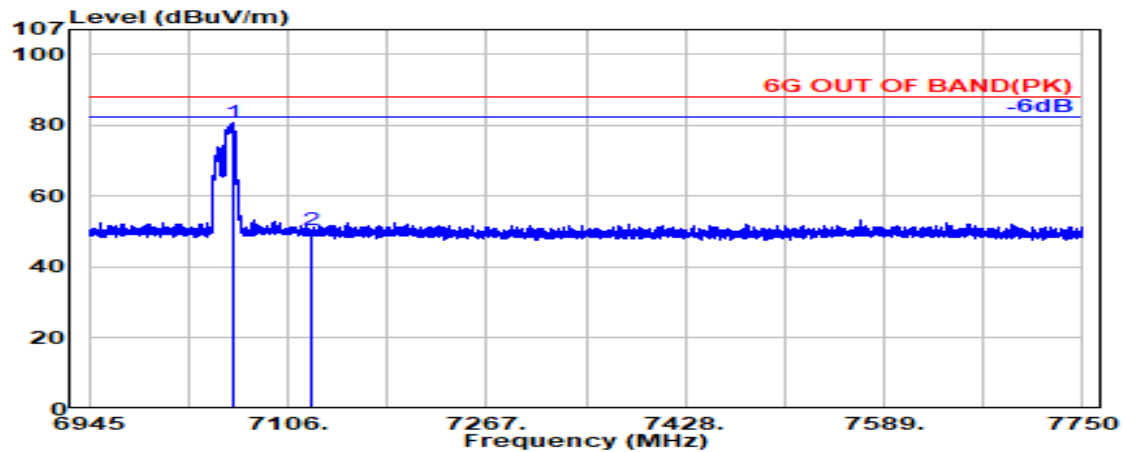

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.600               | 35.65                 | 9.76            | 34.44                  | 69.72             | 80.68                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.25             | 50.47                   | 88.20           | 37.73       | Peak     |

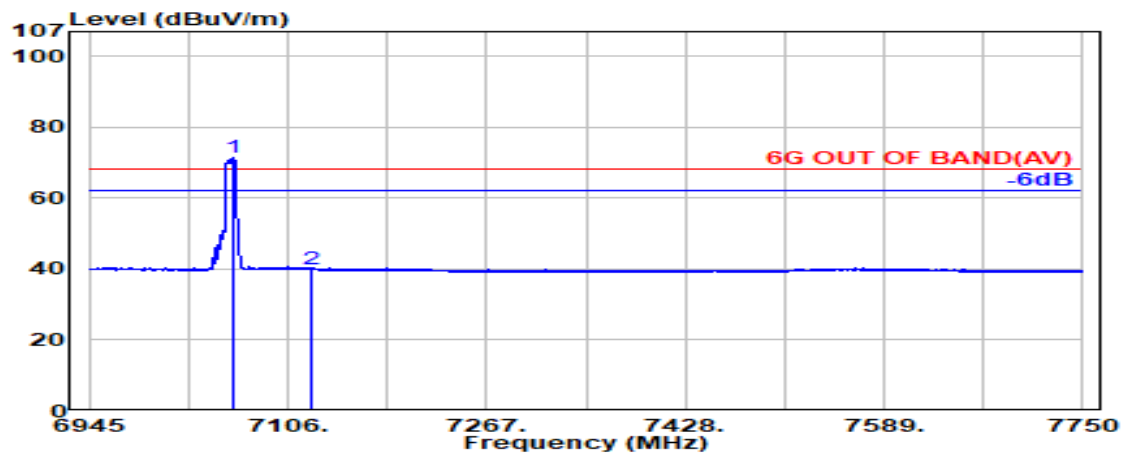

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.300               | 35.65                 | 9.76            | 34.44                  | 60.37             | 71.33                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.80             | 40.01                   | 68.20           | 28.19       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 106T           | RU Index   | 60         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

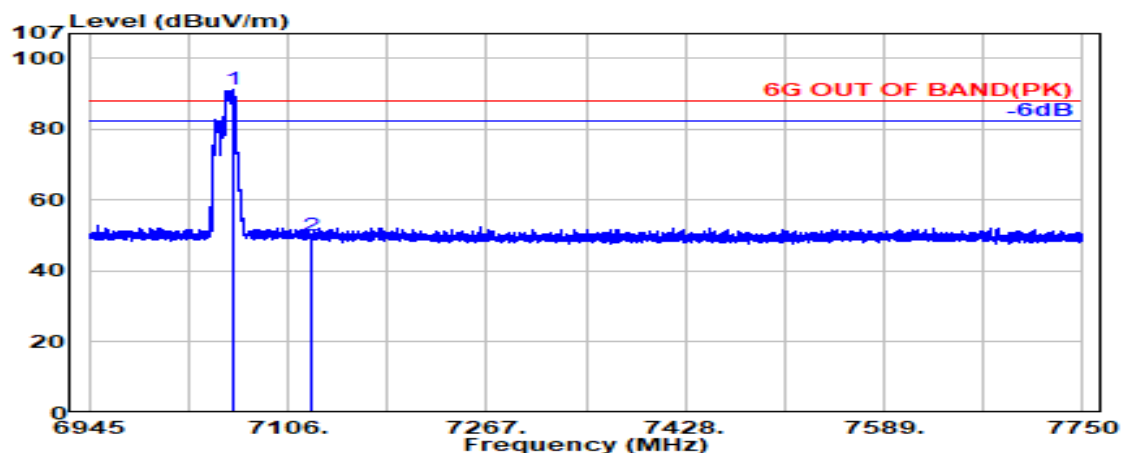

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.900               | 35.65                 | 9.76            | 34.44                  | 80.36             | 91.32                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.95             | 50.16                   | 88.20           | 38.04       | Peak     |

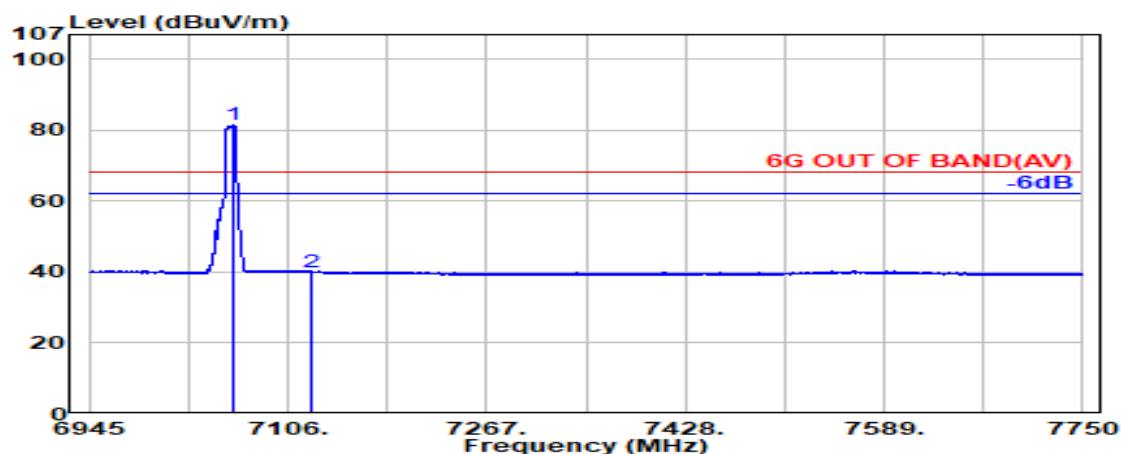

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.400               | 35.65                 | 9.76            | 34.45                  | 70.68             | 81.65                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.72             | 39.93                   | 68.20           | 28.27       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 242T            | RU Index   | 61         |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

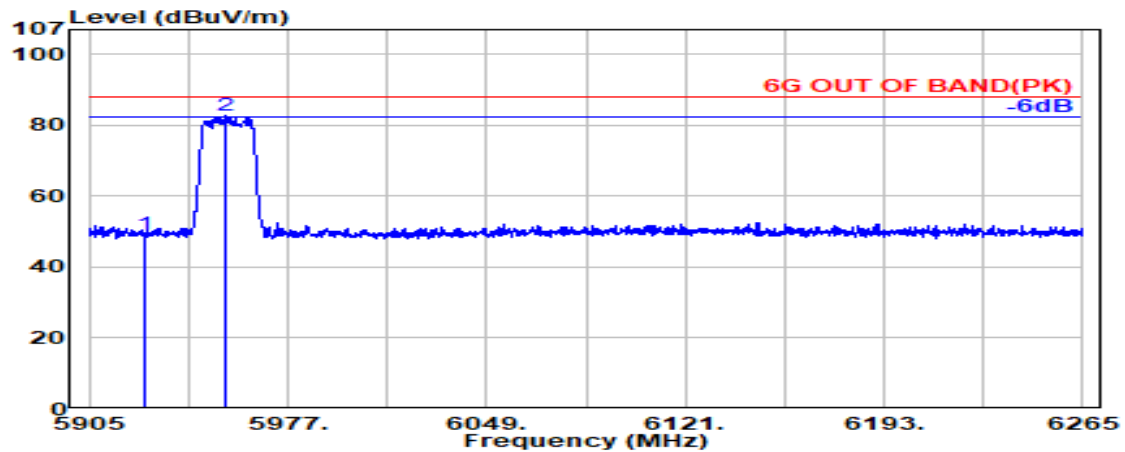

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.58             | 49.41                   | 88.20           | 38.79       | Peak     |
| @ 5954.680               | 34.29                 | 9.01            | 34.38                  | 73.88             | 82.80                   | ---             | ---         | Peak     |

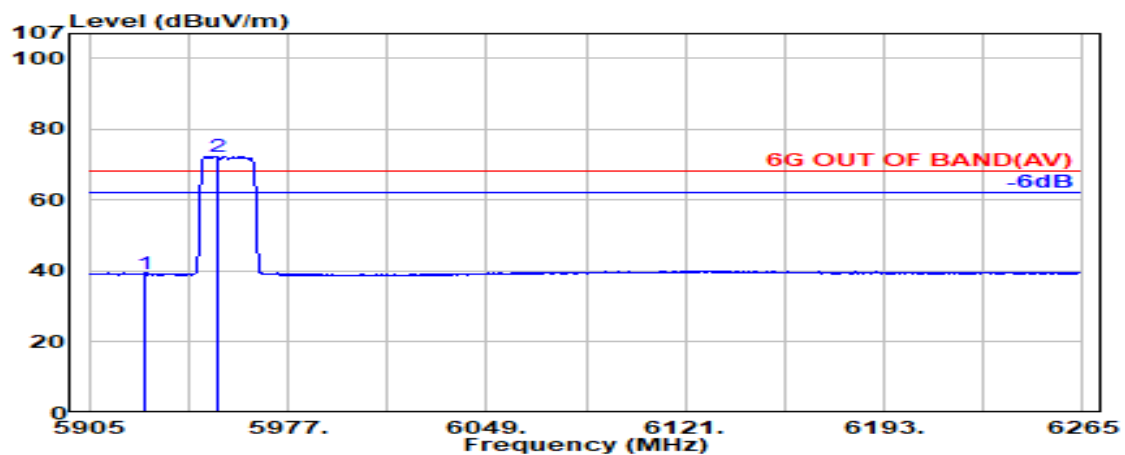

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.33             | 39.15                   | 68.20           | 29.05       | Average  |
| @ 5951.260               | 34.30                 | 9.00            | 34.38                  | 63.51             | 72.43                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 242T            | RU Index   | 61         |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

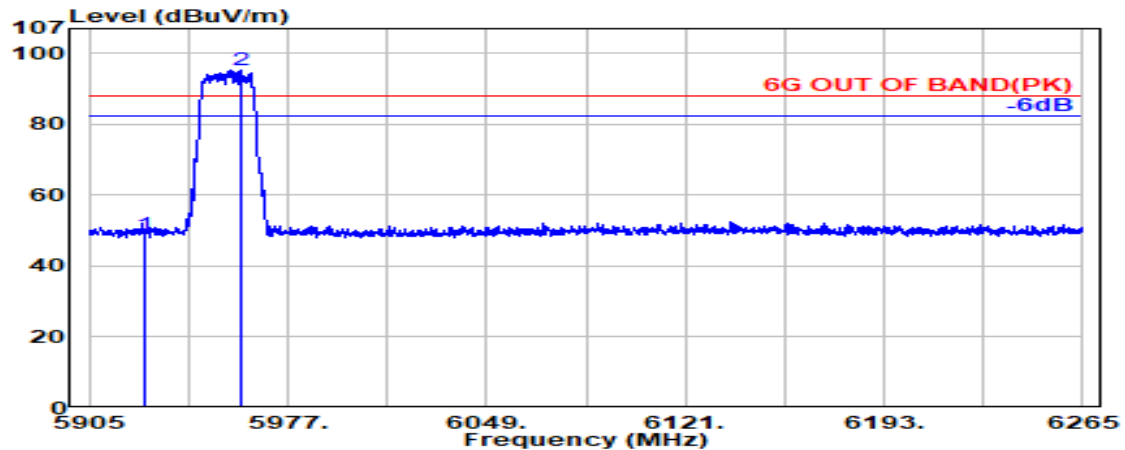

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.22             | 49.05                   | 88.20           | 39.15       | Peak     |
| @ 5960.080               | 34.28                 | 9.01            | 34.38                  | 86.42             | 95.33                   | ---             | ---         | Peak     |

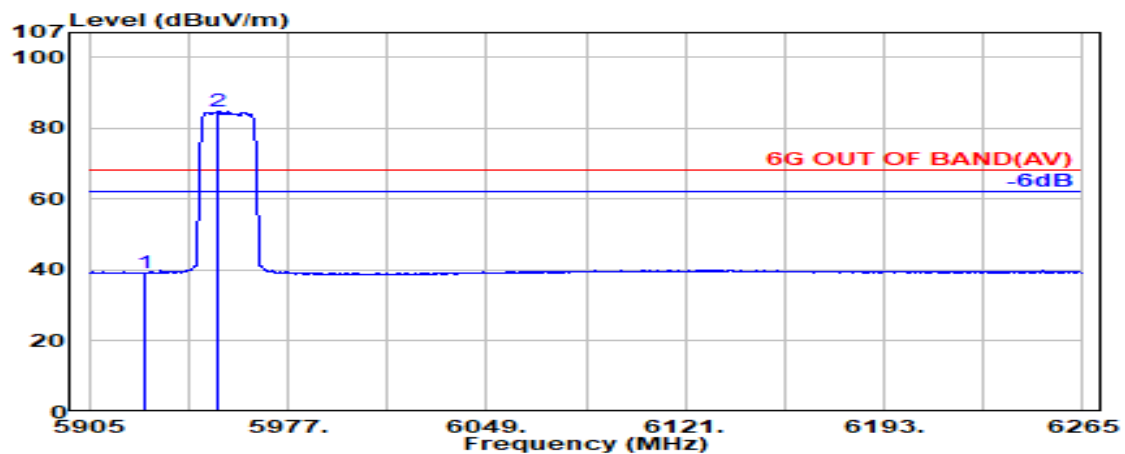

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.28             | 39.10                   | 68.20           | 29.10       | Average  |
| @ 5951.980               | 34.30                 | 9.00            | 34.38                  | 75.83             | 84.76                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 242T           | RU Index   | 64         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

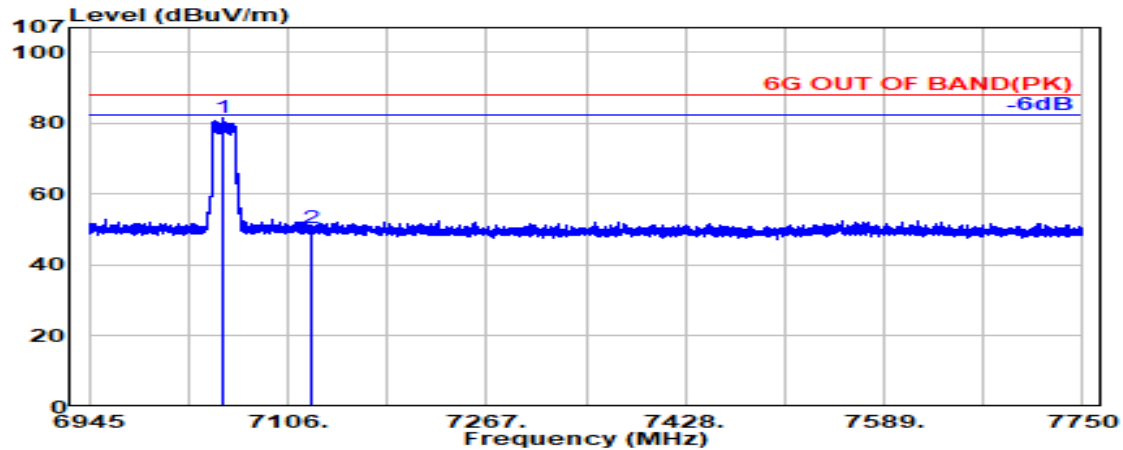

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7053.300               | 35.61                 | 9.75            | 34.44                  | 70.55             | 81.48                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.28             | 50.49                   | 88.20           | 37.71       | Peak     |

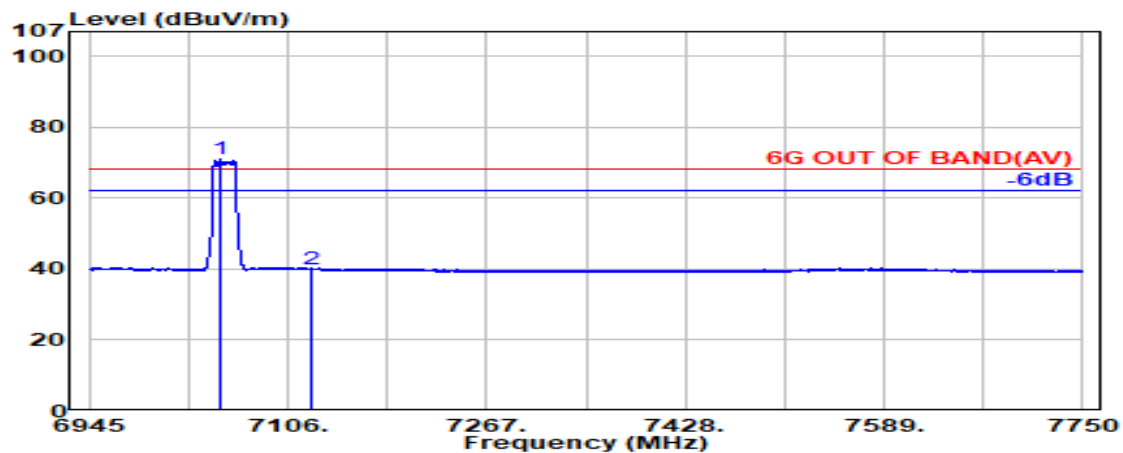

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7050.400               | 35.60                 | 9.75            | 34.44                  | 60.01             | 70.93                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.74             | 39.95                   | 68.20           | 28.25       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 242T           | RU Index   | 64         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

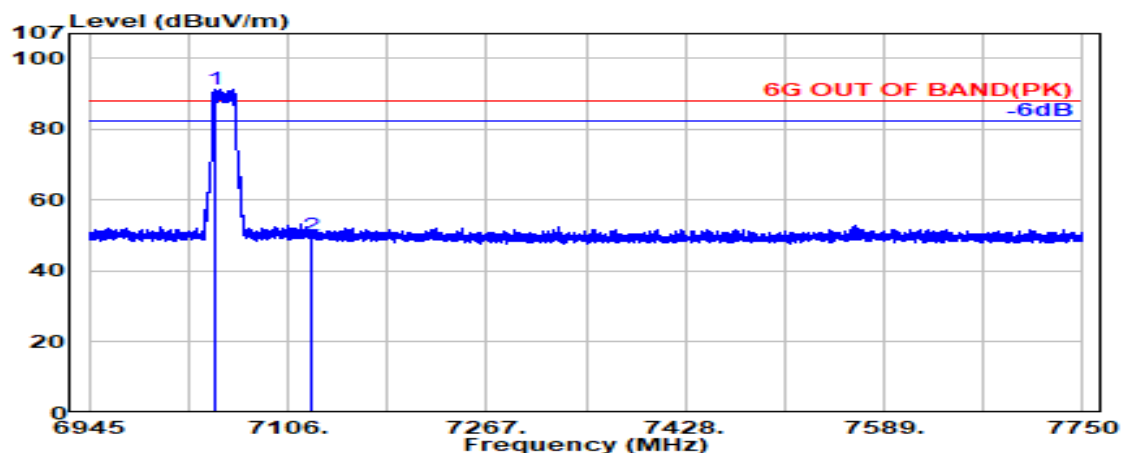

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7046.100               | 35.59                 | 9.75            | 34.43                  | 80.50             | 91.40                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.72             | 49.93                   | 88.20           | 38.27       | Peak     |

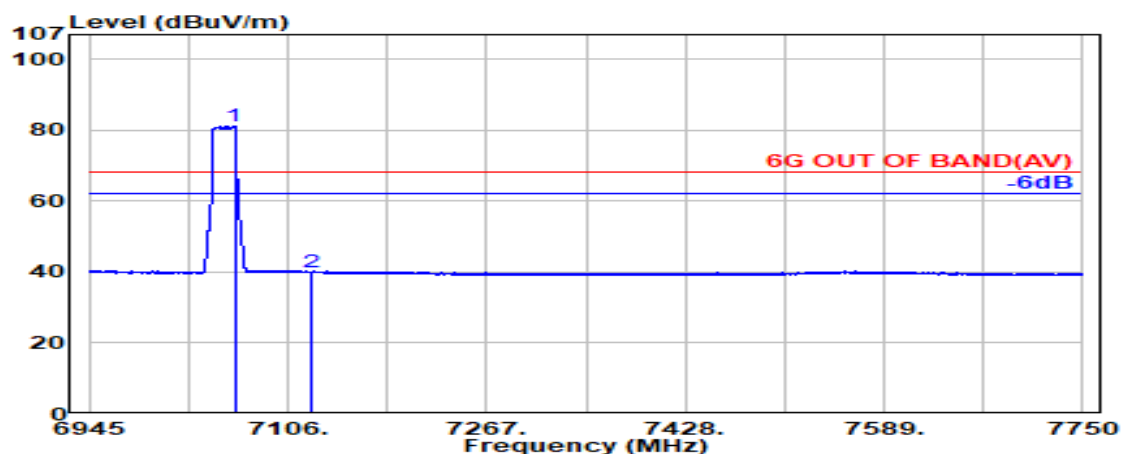

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.900               | 35.65                 | 9.76            | 34.45                  | 70.12             | 81.09                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.75             | 39.96                   | 68.20           | 28.24       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 65         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

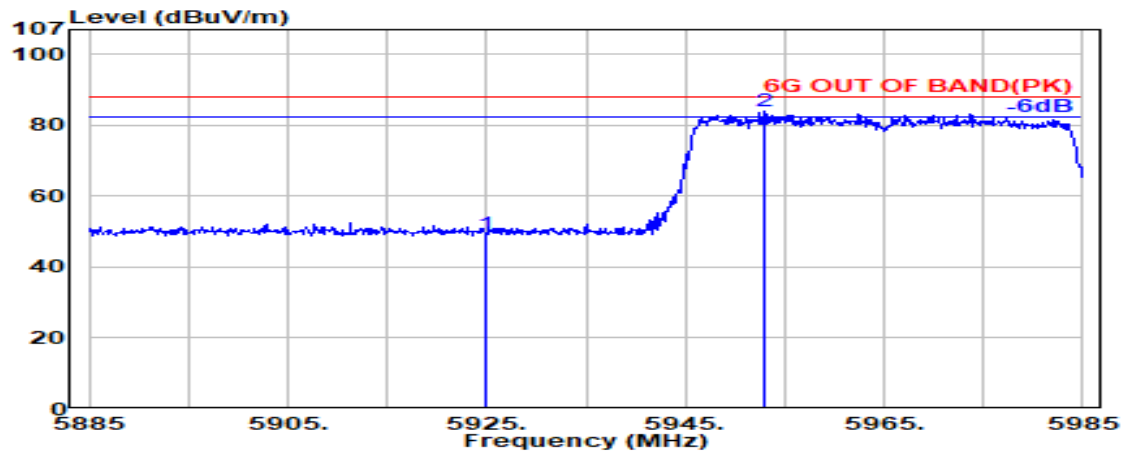

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.43             | 49.25                   | 88.20           | 38.95       | Peak     |
| @ 5952.900               | 34.29                 | 9.00            | 34.38            | 74.92             | 83.84                   | ---             | ---         | Peak     |

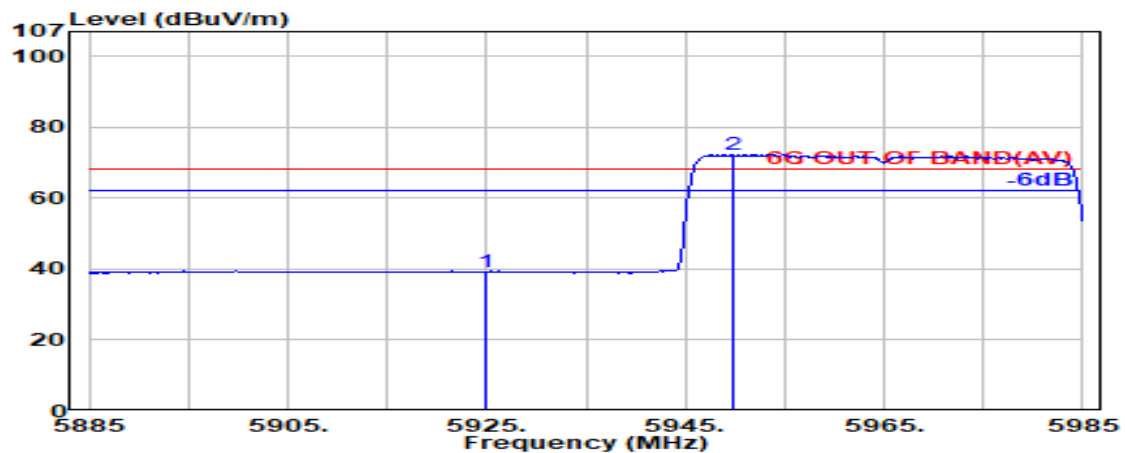

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.30             | 39.12                   | 68.20           | 29.08       | Average  |
| @ 5949.800               | 34.30                 | 9.00            | 34.38            | 63.35             | 72.27                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 65         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

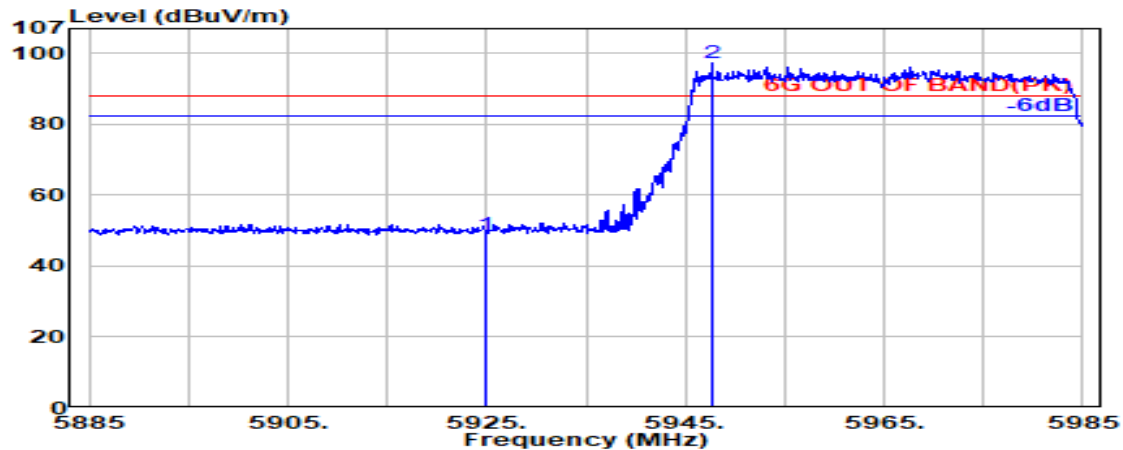

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.04             | 48.87                   | 88.20           | 39.33       | Peak     |
| @ 5947.700               | 34.29                 | 9.00            | 34.38            | 88.29             | 97.21                   | ---             | ---         | Peak     |

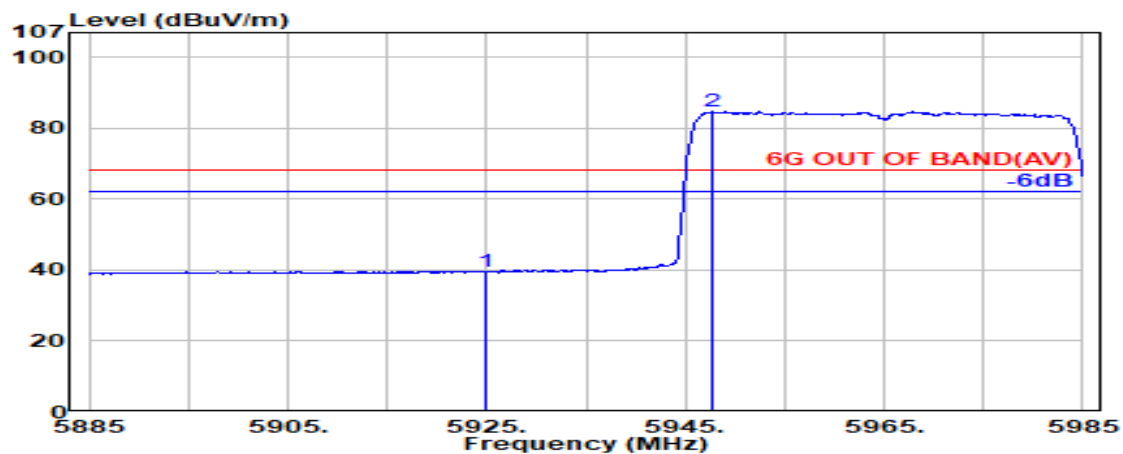

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.77             | 39.59                   | 68.20           | 28.61       | Average  |
| @ 5947.600               | 34.29                 | 9.00            | 34.38            | 75.83             | 84.74                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 66         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

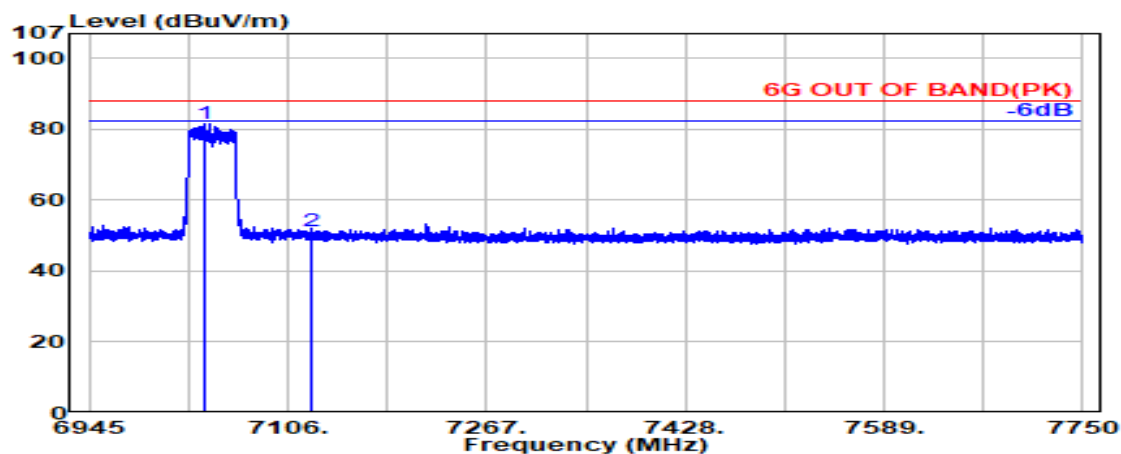

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7038.600               | 35.58                 | 9.75            | 34.43                  | 70.56             | 81.45                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.96             | 51.17                   | 88.20           | 37.03       | Peak     |

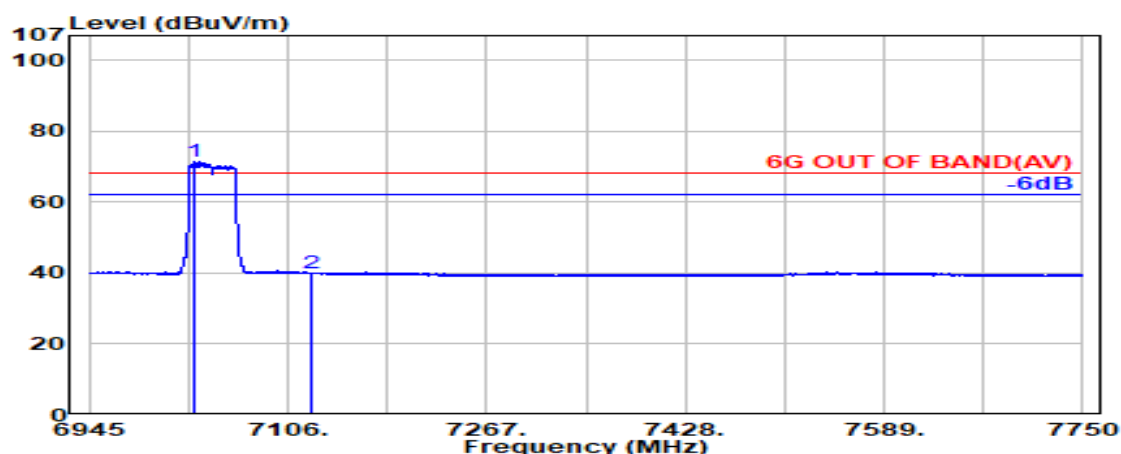

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7030.000               | 35.56                 | 9.74            | 34.42                  | 60.48             | 71.36                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.70             | 39.91                   | 68.20           | 28.29       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301**


**Fax: +886 2 26099303**

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T           | RU Index   | 66         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

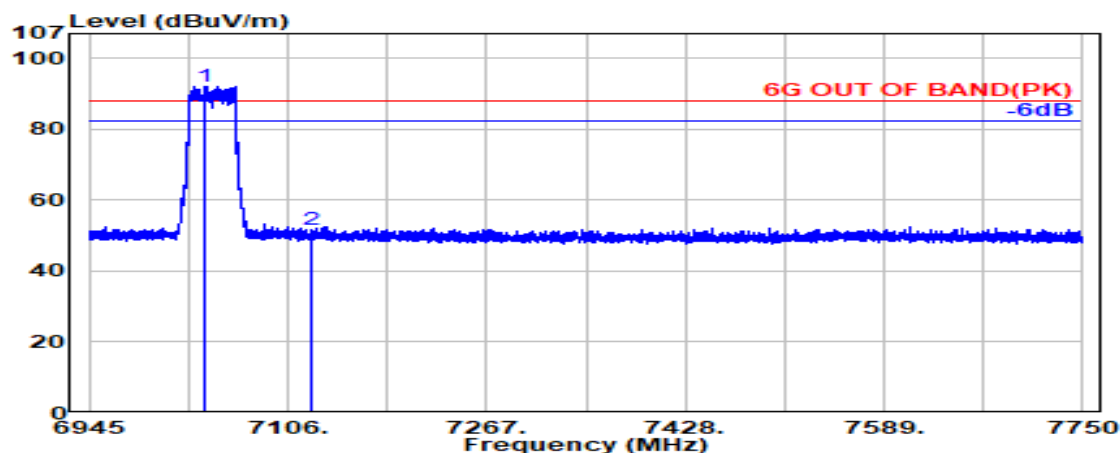

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7039.100               | 35.58                 | 9.75            | 34.43                  | 81.31             | 92.20                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 40.45             | 51.66                   | 88.20           | 36.54       | Peak     |

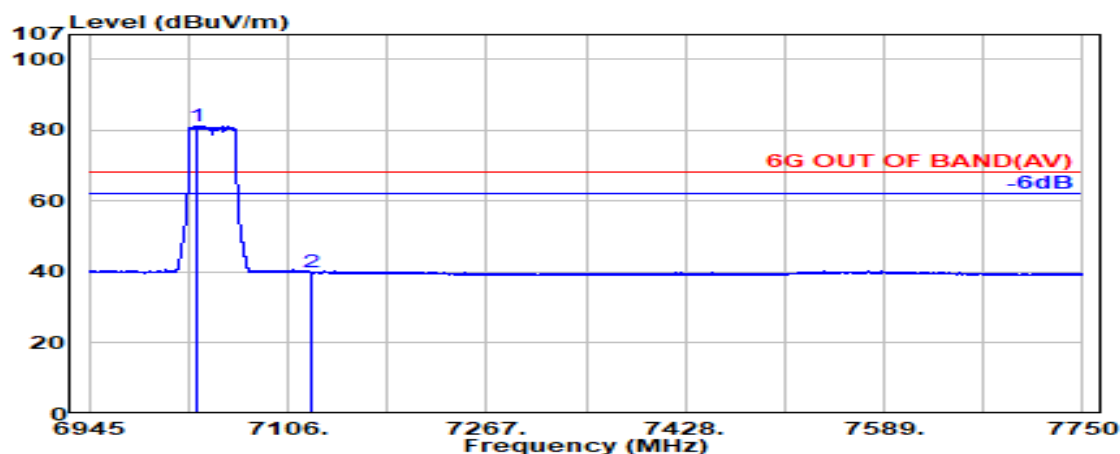

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7033.100               | 35.57                 | 9.74            | 34.42                  | 70.33             | 81.21                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.85             | 40.06                   | 68.20           | 28.14       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

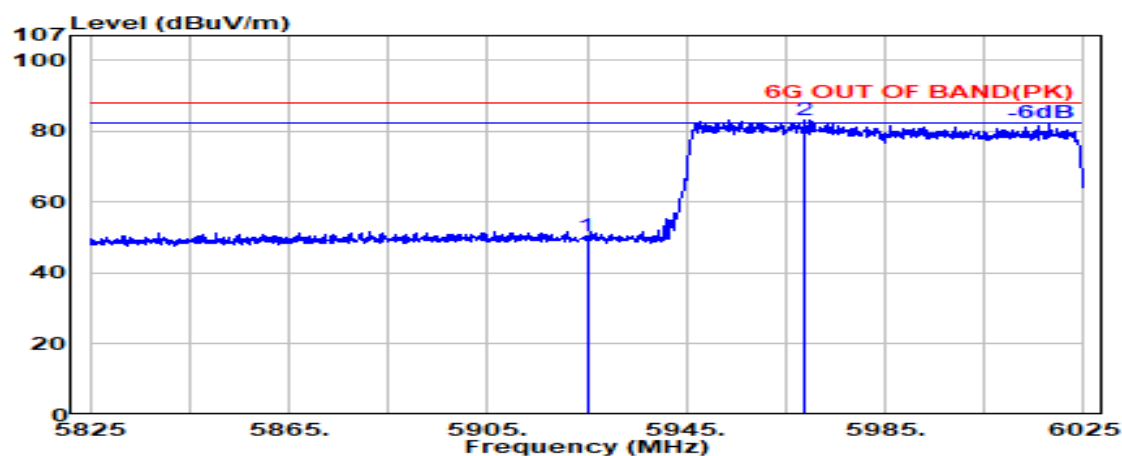

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.52             | 50.34                   | 88.20           | 37.86       | Peak     |
| @ 5968.700               | 34.26                 | 9.01            | 34.39                  | 74.44             | 83.32                   | ---             | ---         | Peak     |

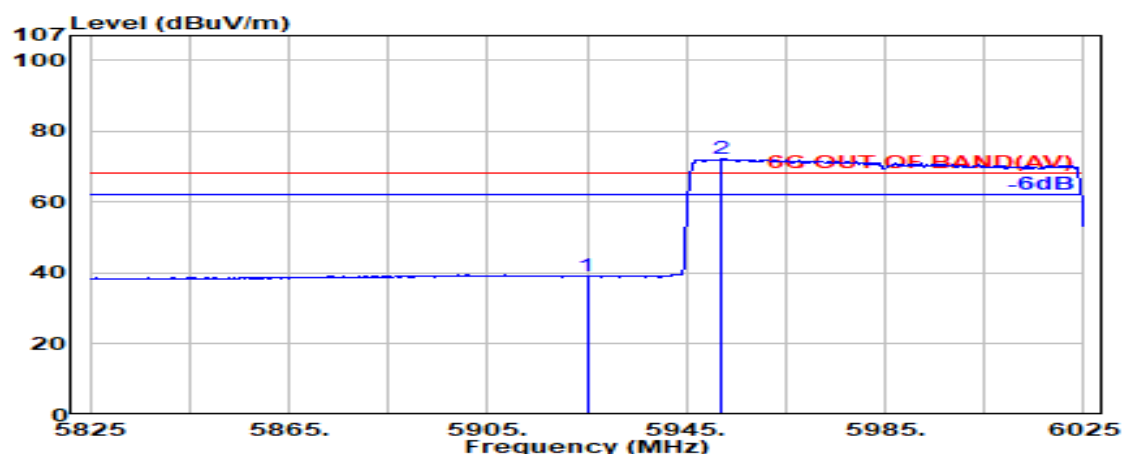


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.25             | 39.07                   | 68.20           | 29.13       | Average  |
| @ 5952.000               | 34.30                 | 9.00            | 34.38                  | 63.25             | 72.17                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

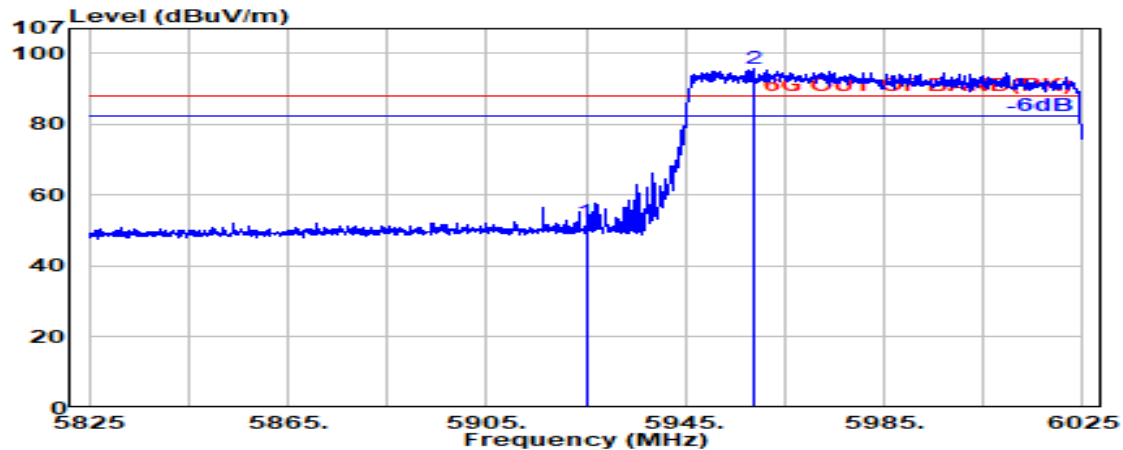

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 43.60             | 52.42                   | 88.20           | 35.78       | Peak     |
| @ 5958.600               | 34.28                 | 9.01            | 34.38            | 86.60             | 95.51                   | ---             | ---         | Peak     |

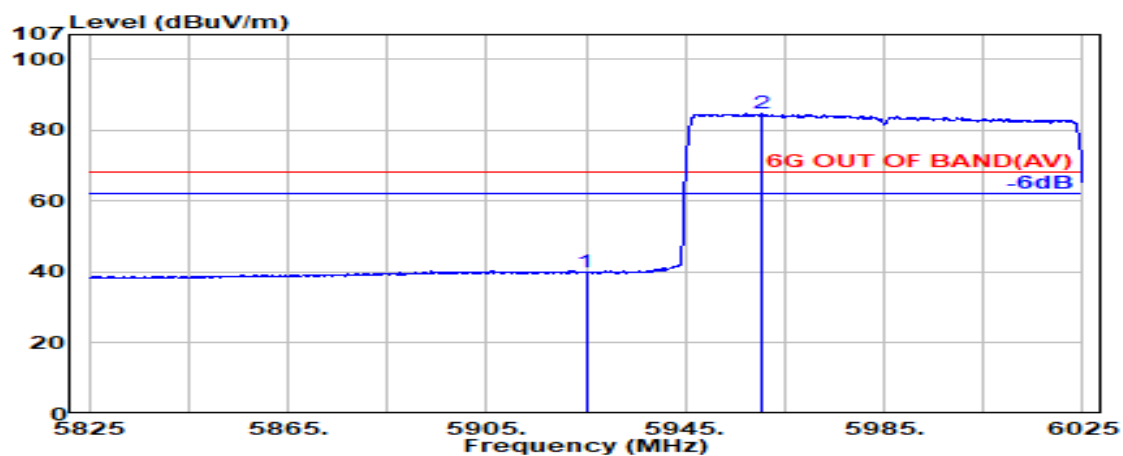

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 31.03             | 39.86                   | 68.20           | 28.34       | Average  |
| @ 5960.600               | 34.28                 | 9.01            | 34.38            | 75.73             | 84.63                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

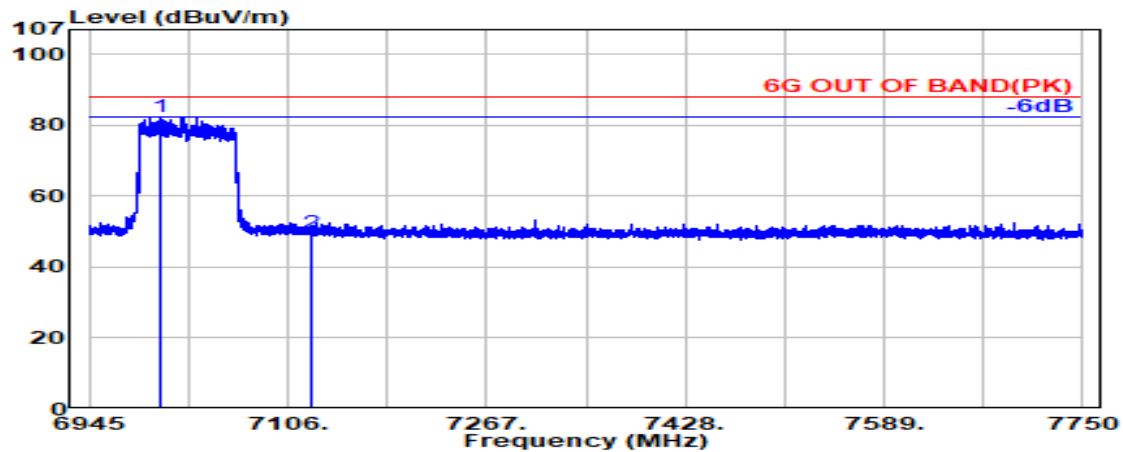

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7003.200               | 35.51                 | 9.72            | 34.40                  | 71.70             | 82.52                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.41             | 49.62                   | 88.20           | 38.58       | Peak     |

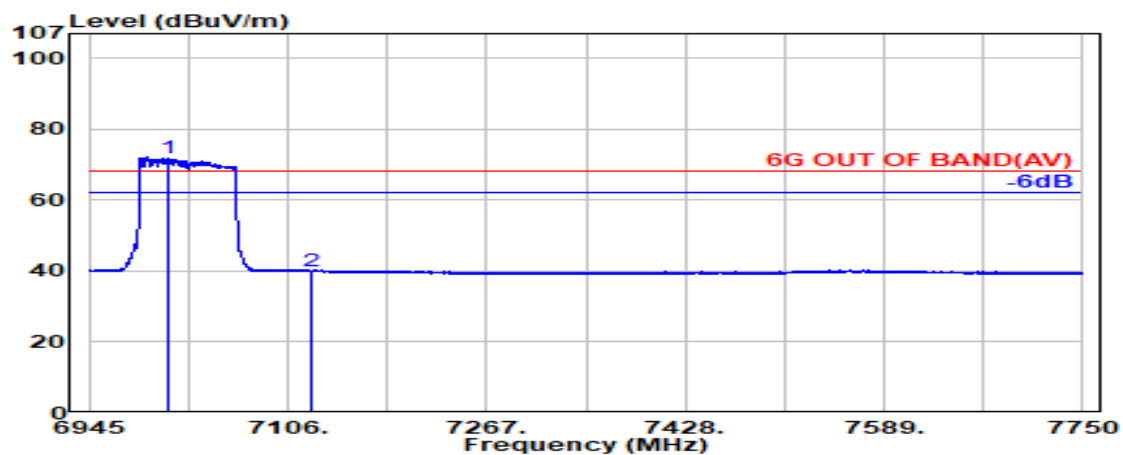

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.100               | 35.52                 | 9.73            | 34.41                  | 60.89             | 71.72                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.78             | 39.99                   | 68.20           | 28.21       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 996T           | RU Index   | 67         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

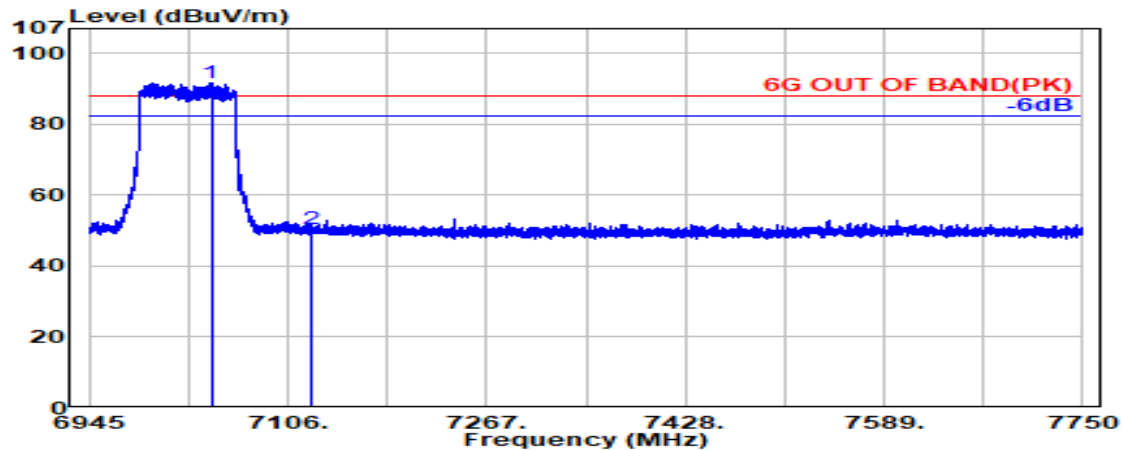

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7043.900               | 35.59                 | 9.75            | 34.43            | 80.76             | 91.67                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.28             | 50.49                   | 88.20           | 37.71       | Peak     |

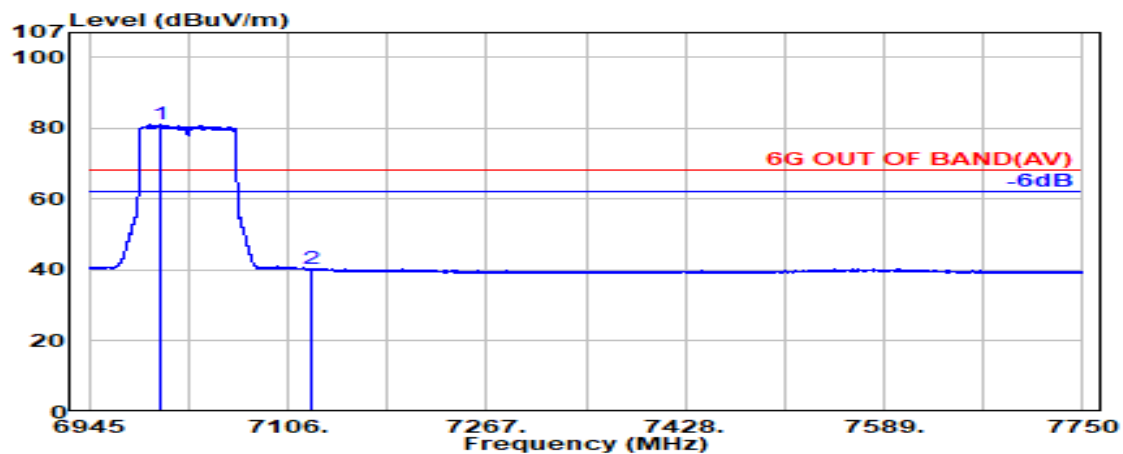

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7003.200               | 35.51                 | 9.72            | 34.40            | 70.19             | 81.02                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.97             | 40.18                   | 68.20           | 28.02       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | S68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

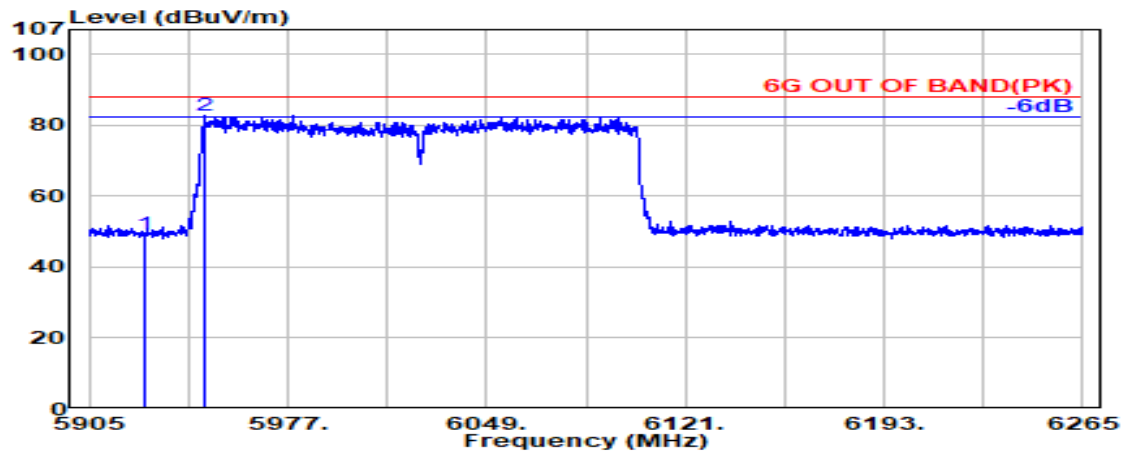

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.29             | 49.12                   | 88.20           | 39.08       | Peak     |
| @ 5946.760               | 34.29                 | 9.00            | 34.38                  | 73.80             | 82.71                   | ---             | ---         | Peak     |

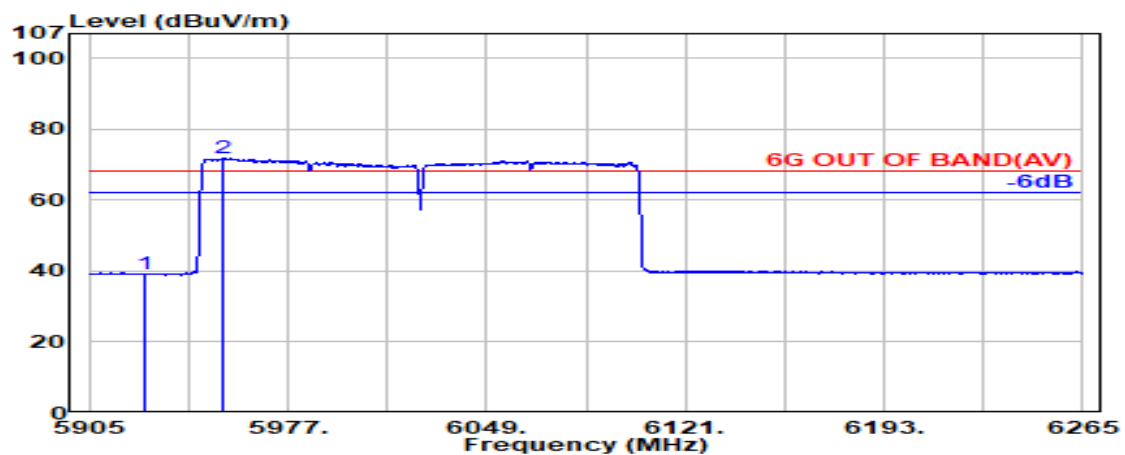

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.25             | 39.07                   | 68.20           | 29.13       | Average  |
| @ 5953.780               | 34.29                 | 9.01            | 34.38                  | 62.95             | 71.87                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | S68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

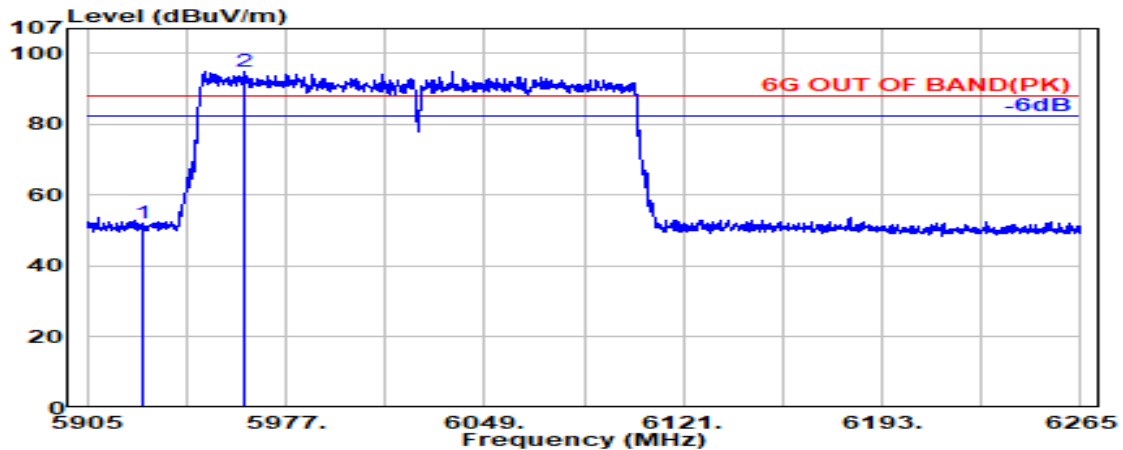

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.14             | 51.96                   | 88.20           | 36.24       | Peak     |
| @ 5962.060               | 34.28                 | 9.01            | 34.38                  | 85.89             | 94.79                   | ---             | ---         | Peak     |

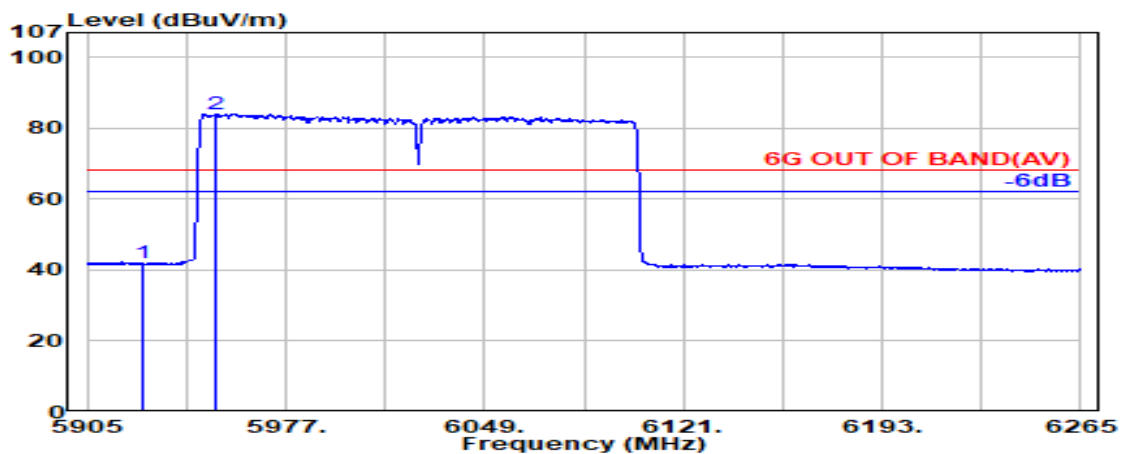

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 33.05             | 41.87                   | 68.20           | 26.33       | Average  |
| @ 5951.980               | 34.30                 | 9.00            | 34.38                  | 75.07             | 83.99                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | W68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

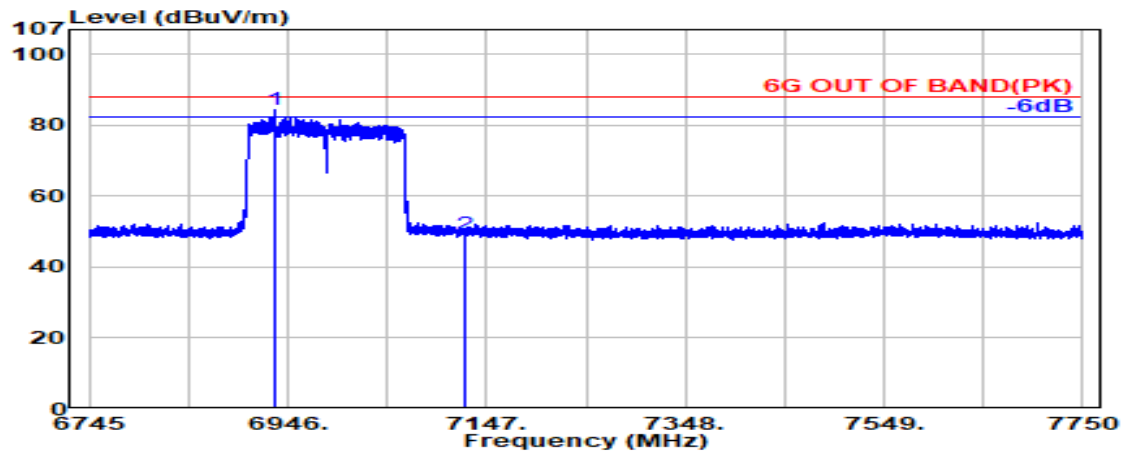

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6933.750               | 35.47                 | 9.68            | 34.36            | 73.77             | 84.55                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 38.07             | 49.28                   | 88.20           | 38.92       | Peak     |

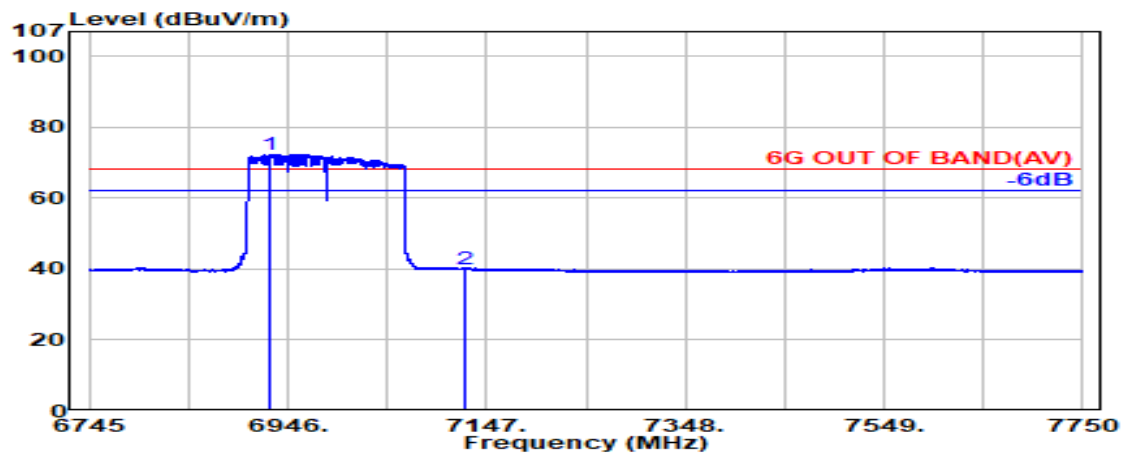

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6928.041               | 35.46                 | 9.67            | 34.36            | 61.59             | 72.36                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.74             | 39.95                   | 68.20           | 28.25       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2          | RU Index   | W68        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

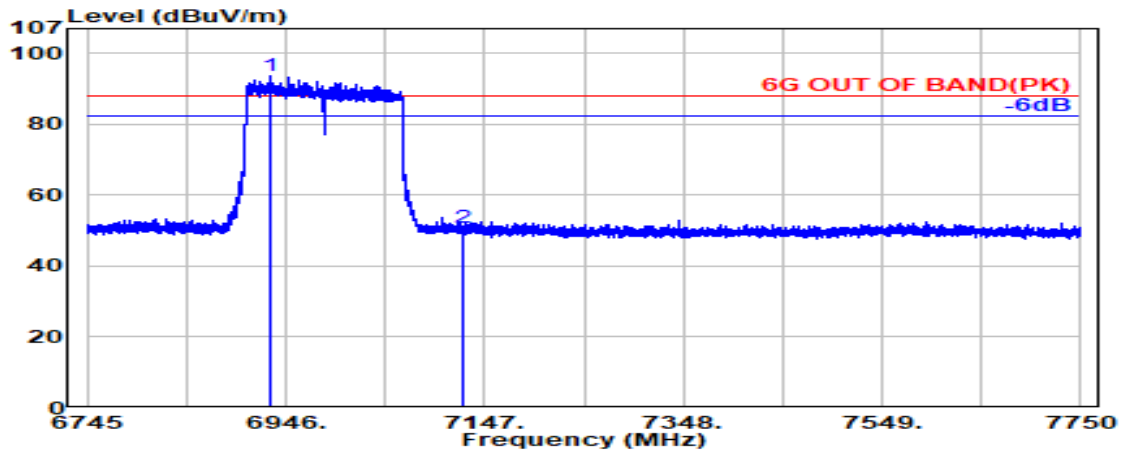

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6931.133               | 35.46                 | 9.68            | 34.36                  | 82.97             | 93.75                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.56             | 50.77                   | 88.20           | 37.43       | Peak     |

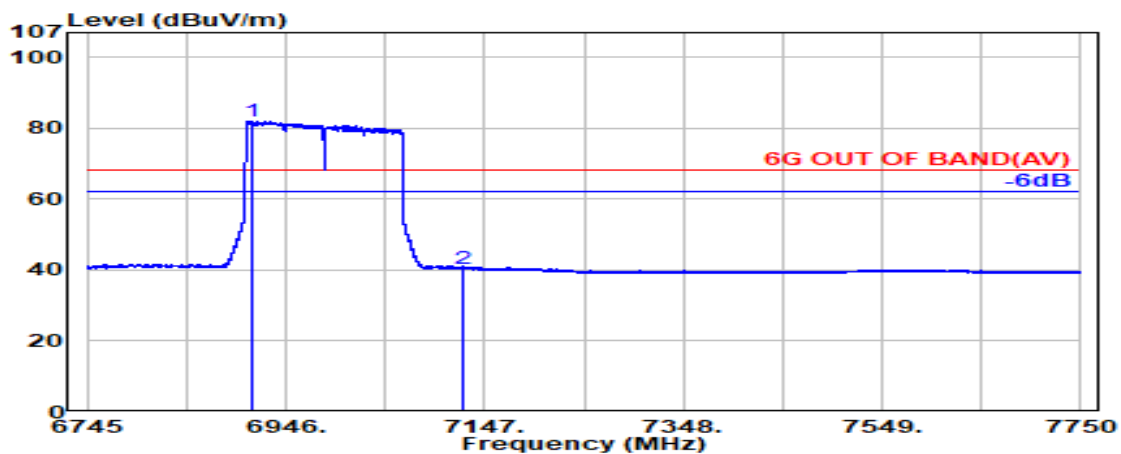

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6910.914               | 35.42                 | 9.66            | 34.35                  | 71.27             | 82.01                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 29.26             | 40.47                   | 68.20           | 27.73       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 70         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

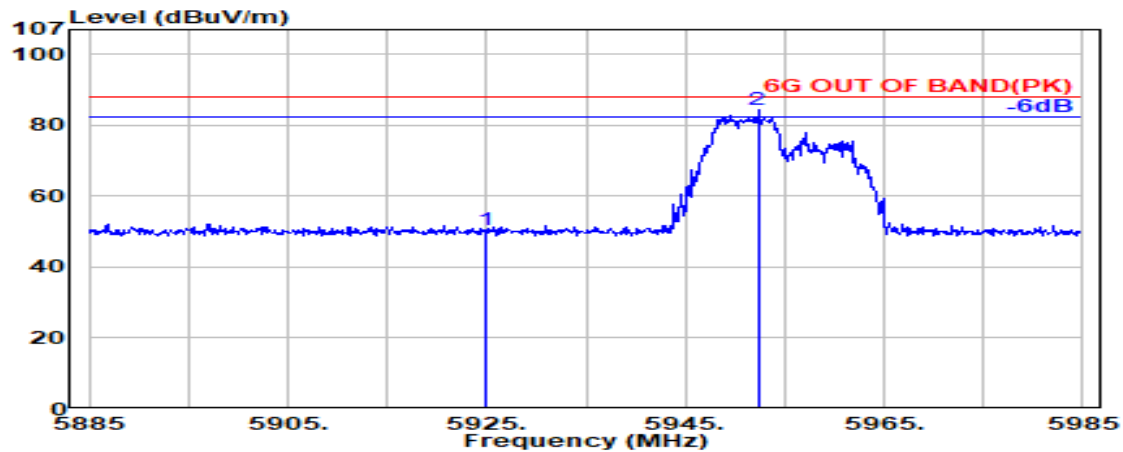

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.74             | 50.57                   | 88.20           | 37.63       | Peak     |
| @ 5952.300               | 34.30                 | 9.00            | 34.38                  | 75.31             | 84.24                   | ---             | ---         | Peak     |

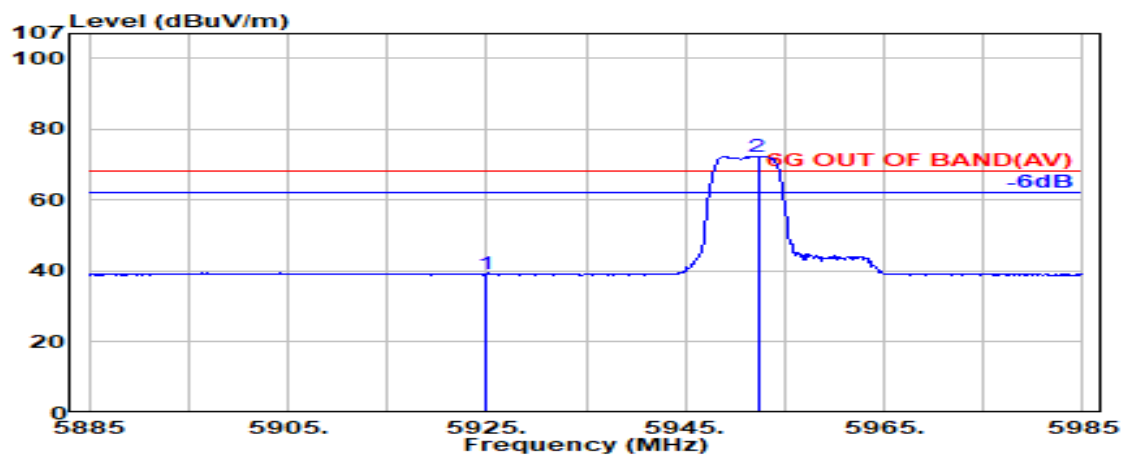


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.33             | 39.15                   | 68.20           | 29.05       | Average  |
| @ 5952.300               | 34.30                 | 9.00            | 34.38                  | 63.52             | 72.44                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 70         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

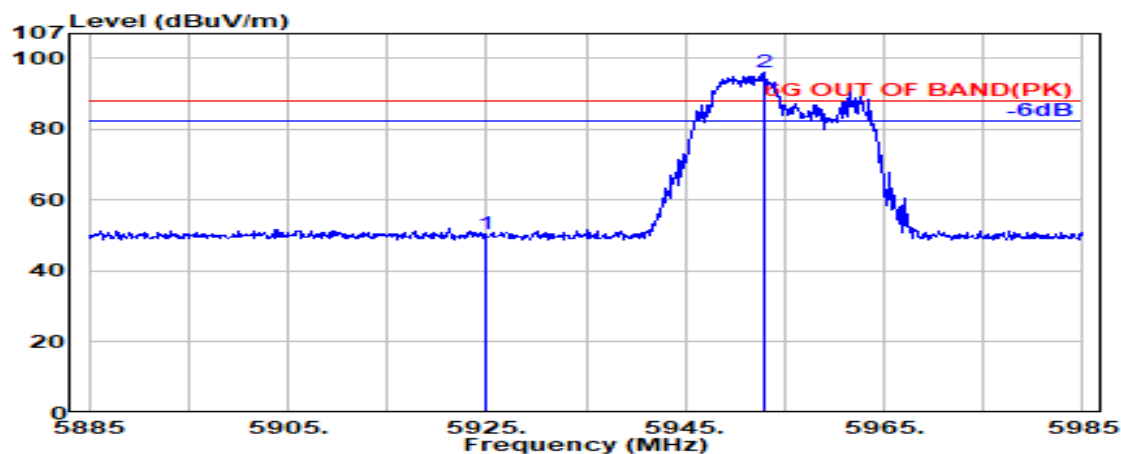

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.49             | 50.31                   | 88.20           | 37.89       | Peak     |
| @ 5952.900               | 34.29                 | 9.00            | 34.38                  | 87.06             | 95.98                   | ---             | ---         | Peak     |

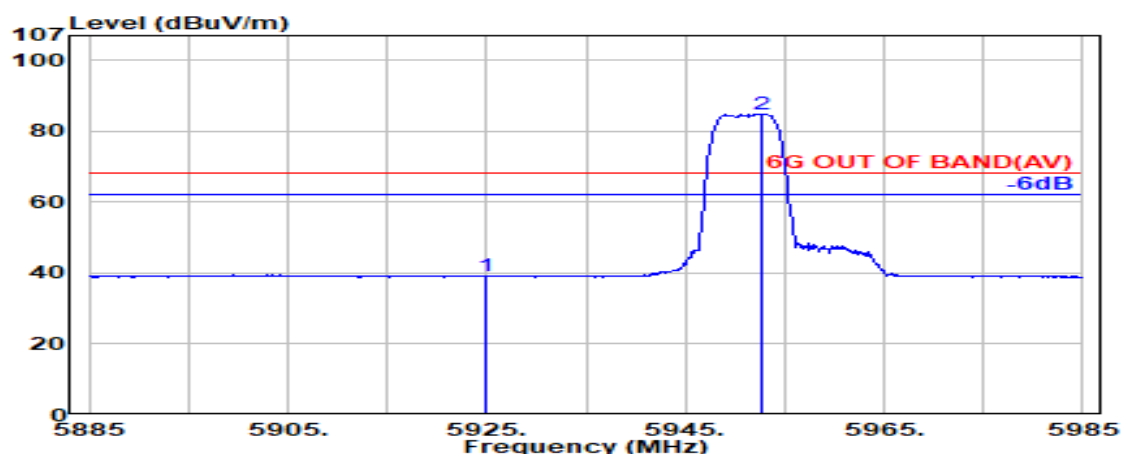

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.42             | 39.25                   | 68.20           | 28.95       | Average  |
| @ 5952.600               | 34.29                 | 9.00            | 34.38                  | 76.05             | 84.97                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 75         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

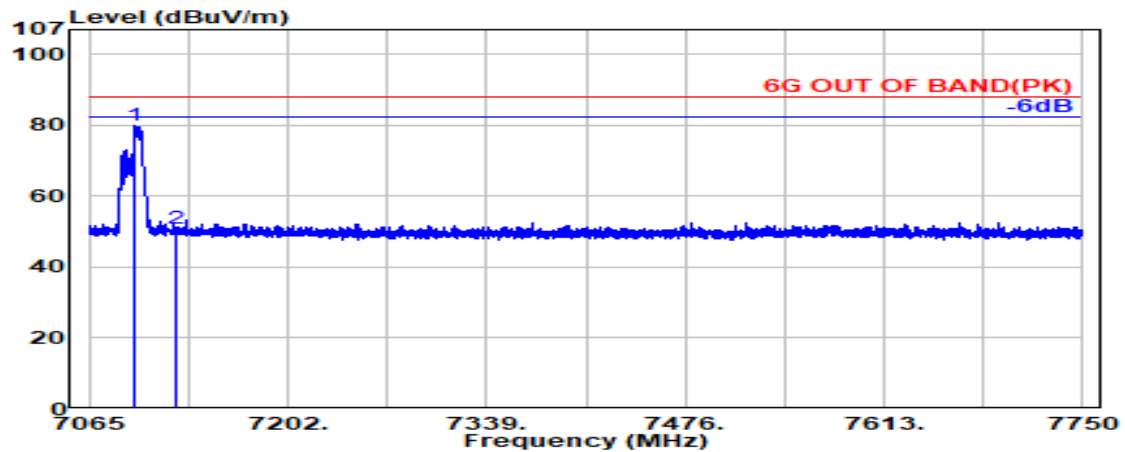

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7096.300               | 35.79                 | 9.78            | 34.47                  | 68.77             | 79.87                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.51             | 50.72                   | 88.20           | 37.48       | Peak     |

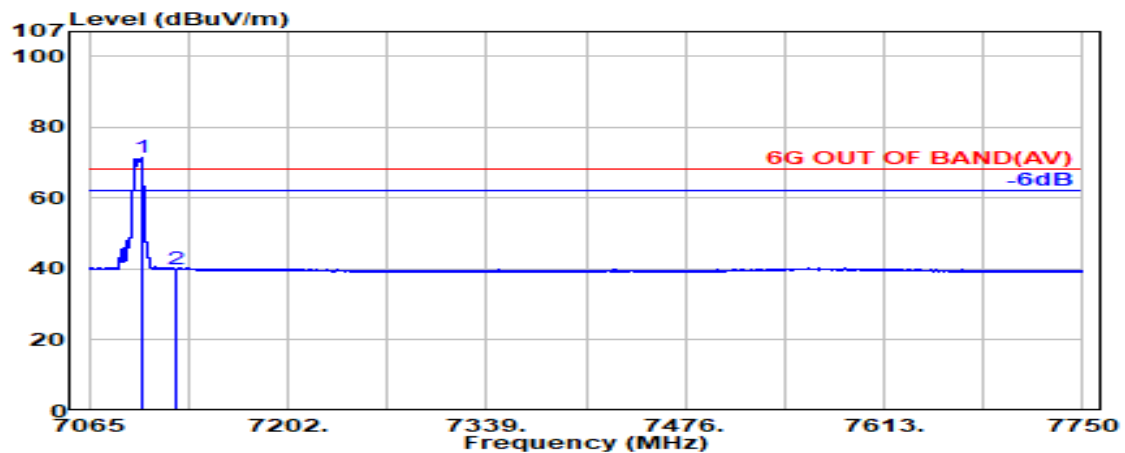

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.100               | 35.80                 | 9.79            | 34.47                  | 60.35             | 71.47                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.77             | 39.99                   | 68.20           | 28.21       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 75         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

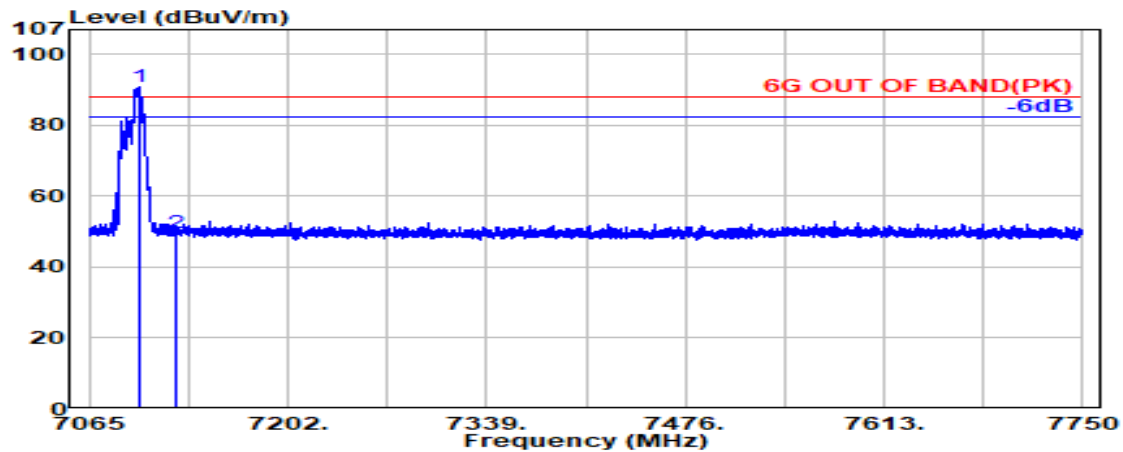

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7099.400               | 35.80                 | 9.78            | 34.47                  | 79.83             | 90.94                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.52             | 49.73                   | 88.20           | 38.47       | Peak     |

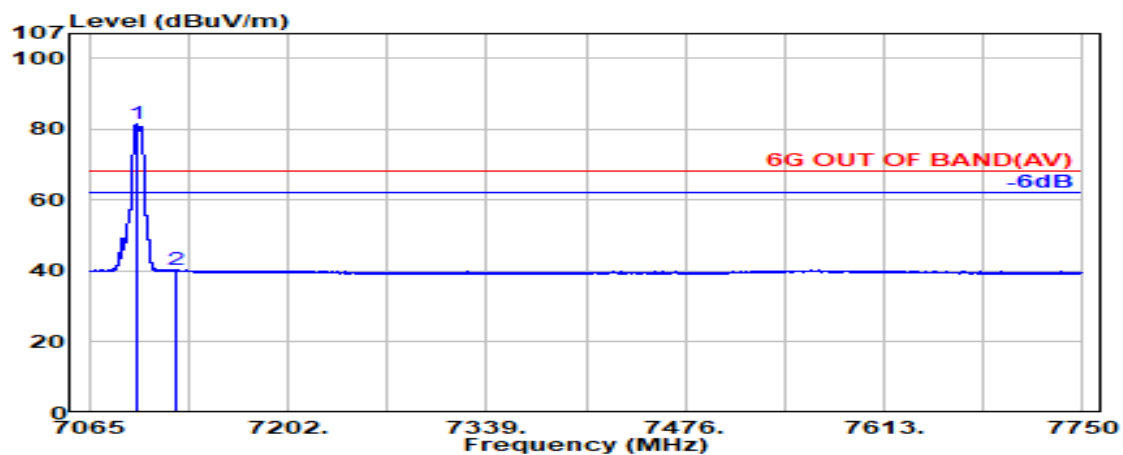

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7098.500               | 35.79                 | 9.78            | 34.47                  | 70.26             | 81.37                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.97             | 40.18                   | 68.20           | 28.02       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 82         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

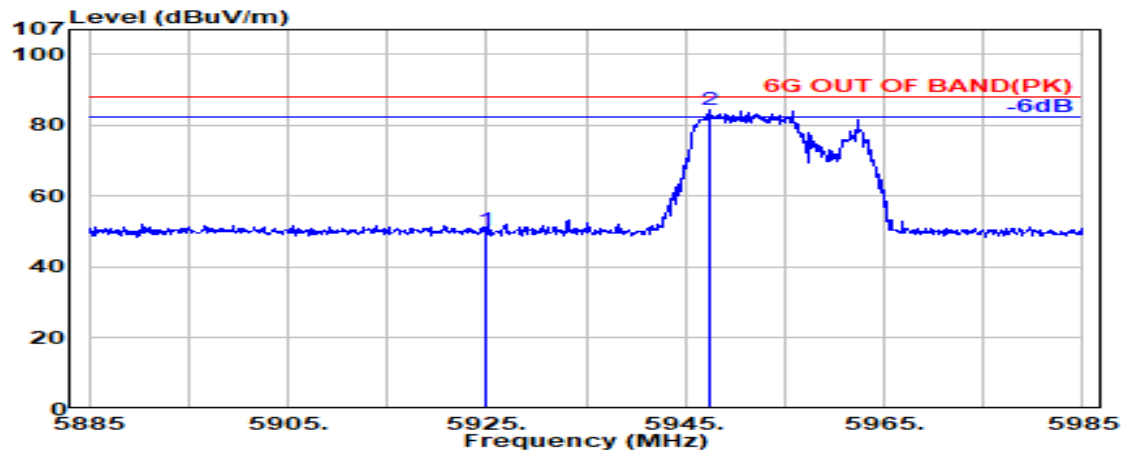

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.79             | 50.61                   | 88.20           | 37.59       | Peak     |
| @ 5947.500               | 34.29                 | 9.00            | 34.38                  | 75.34             | 84.26                   | ---             | ---         | Peak     |

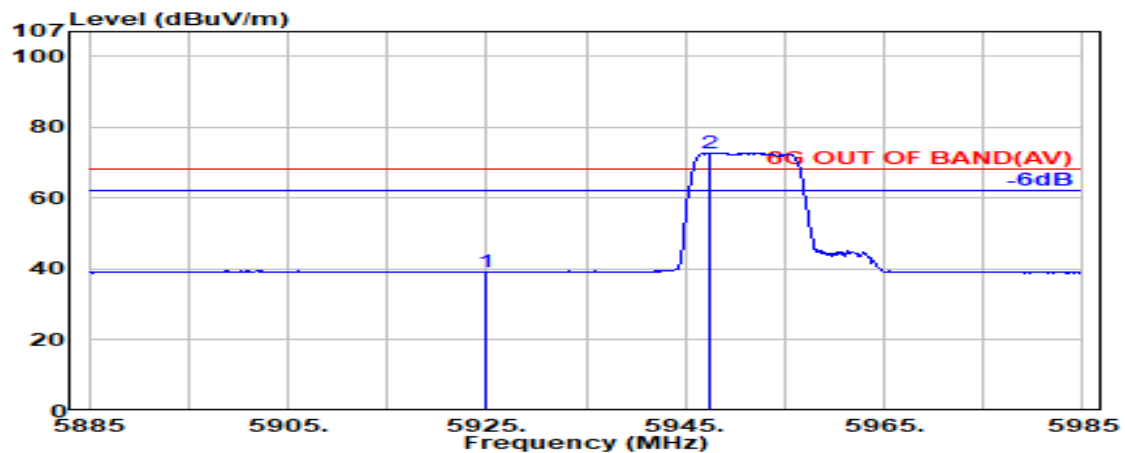

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.38             | 39.20                   | 68.20           | 29.00       | Average  |
| @ 5947.400               | 34.29                 | 9.00            | 34.38                  | 63.94             | 72.85                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 82         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

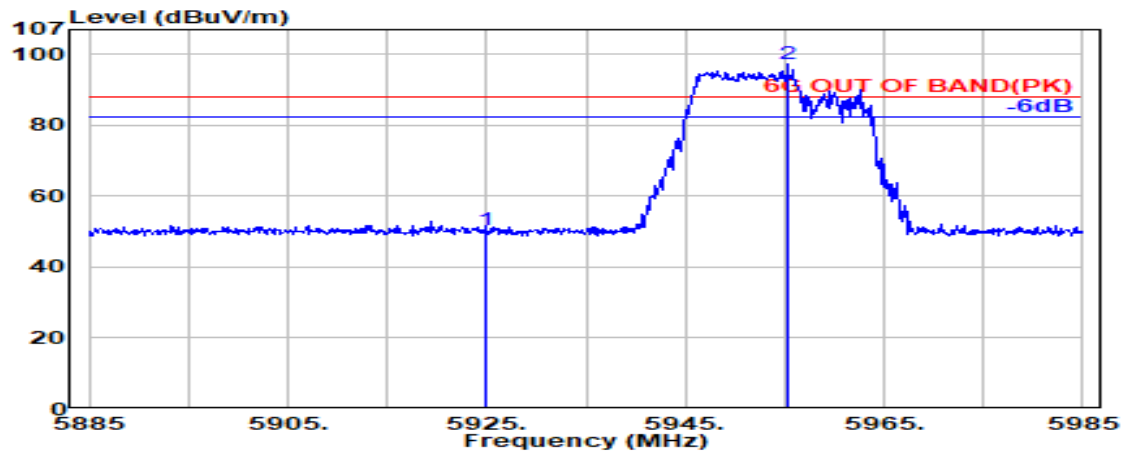

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.55             | 50.37                   | 88.20           | 37.83       | Peak     |
| @ 5955.300               | 34.29                 | 9.01            | 34.38                  | 88.38             | 97.29                   | ---             | ---         | Peak     |

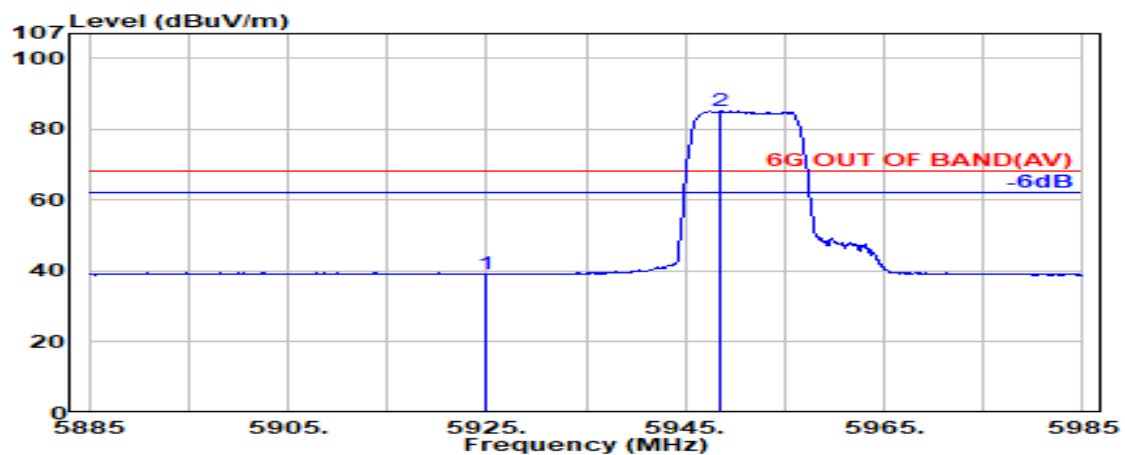

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.31             | 39.14                   | 68.20           | 29.06       | Average  |
| @ 5948.600               | 34.29                 | 9.00            | 34.38                  | 76.19             | 85.11                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 85         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

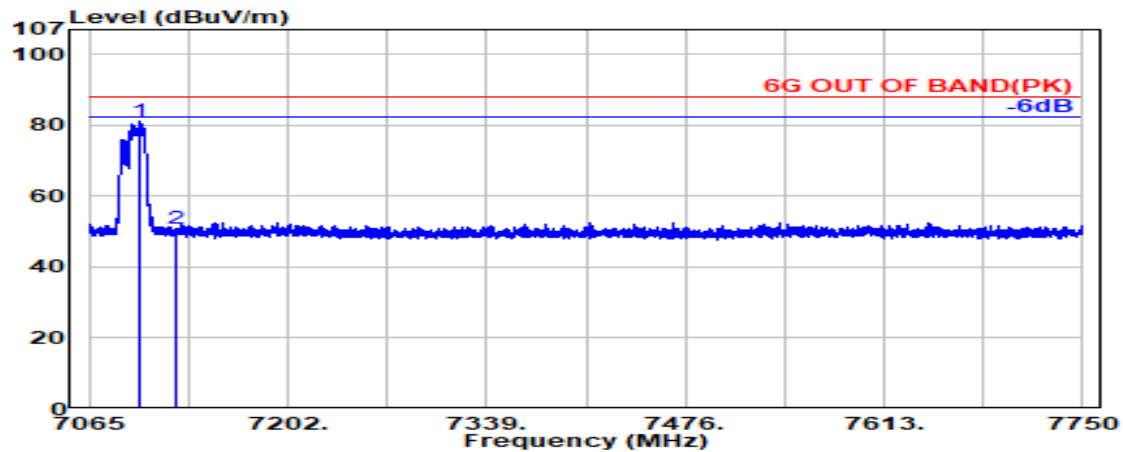

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7099.400               | 35.80                 | 9.78            | 34.47            | 70.03             | 81.14                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 39.61             | 50.83                   | 88.20           | 37.37       | Peak     |

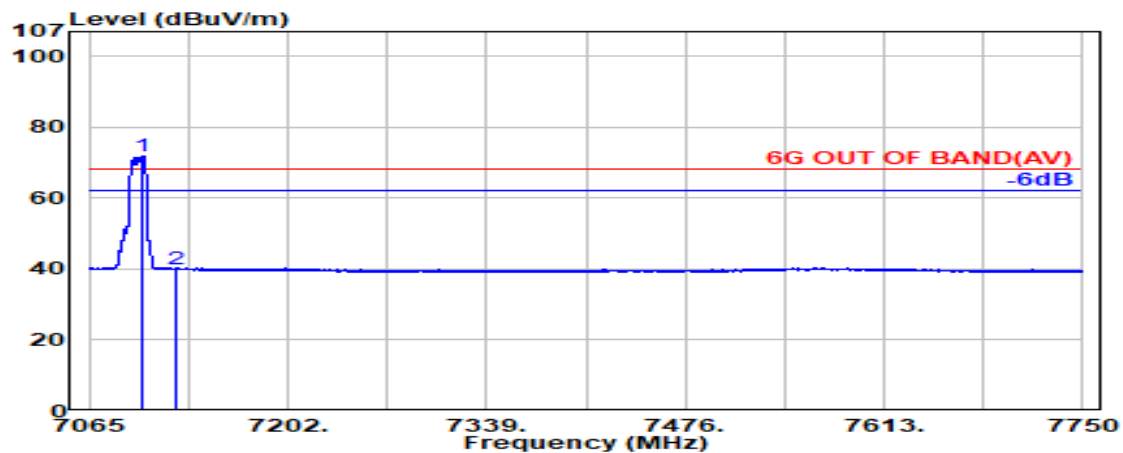

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7101.300               | 35.81                 | 9.79            | 34.47            | 60.64             | 71.76                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.74             | 39.95                   | 68.20           | 28.25       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 85         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

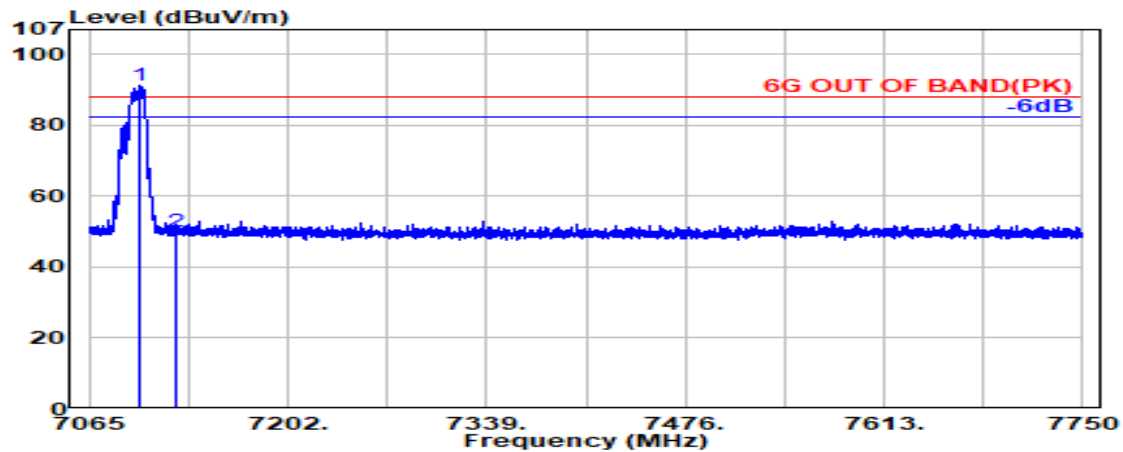

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7099.900               | 35.80                 | 9.78            | 34.47                  | 80.03             | 91.15                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.97             | 50.18                   | 88.20           | 38.02       | Peak     |

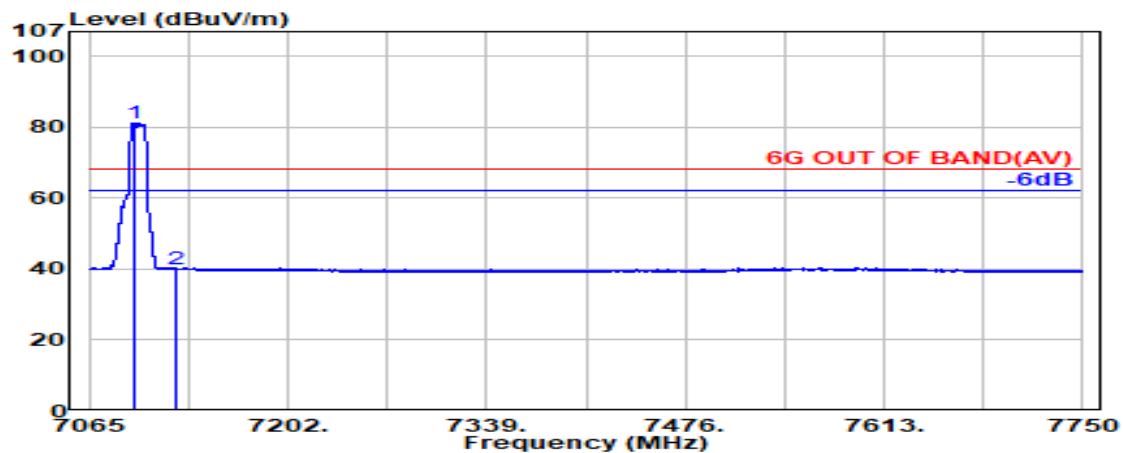

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7096.300               | 35.79                 | 9.78            | 34.47                  | 70.26             | 81.36                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.78             | 40.00                   | 68.20           | 28.20       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 93         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

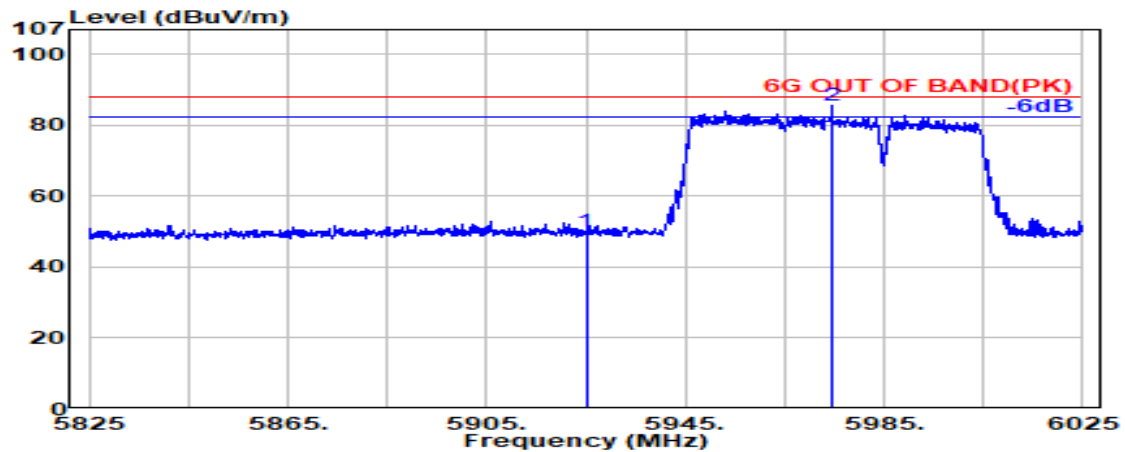

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 41.30             | 50.12                   | 88.20           | 38.08       | Peak     |
| @ 5974.500               | 34.25                 | 9.02            | 34.39                  | 76.61             | 85.49                   | ---             | ---         | Peak     |

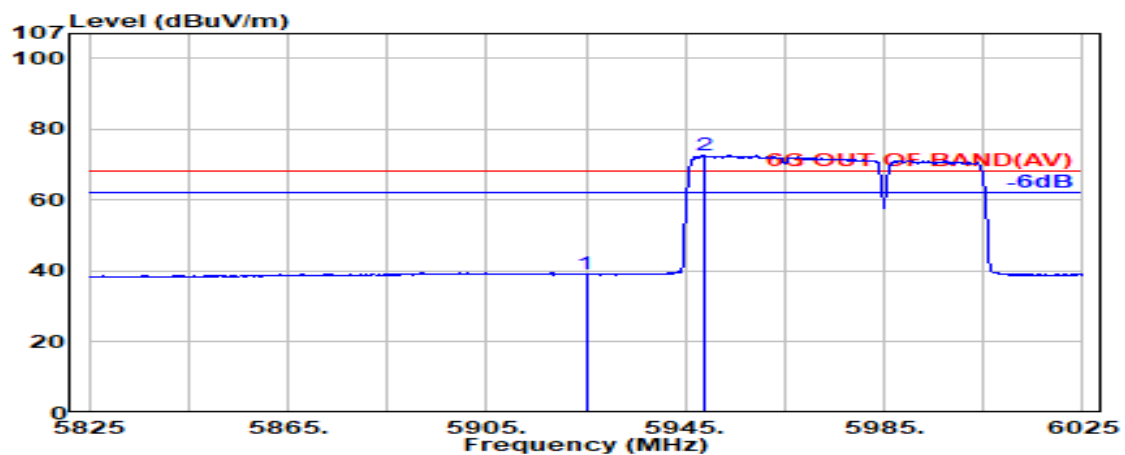

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.37             | 39.20                   | 68.20           | 29.00       | Average  |
| @ 5948.800               | 34.30                 | 9.00            | 34.38                  | 63.81             | 72.73                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 93         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

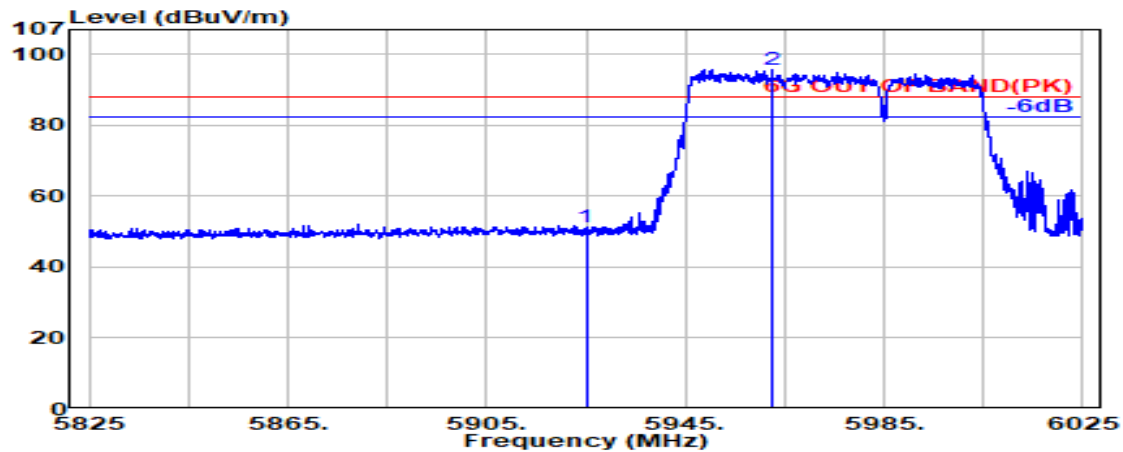

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.32             | 51.15                   | 88.20           | 37.05       | Peak     |
| @ 5962.400               | 34.28                 | 9.01            | 34.38                  | 86.93             | 95.83                   | ---             | ---         | Peak     |

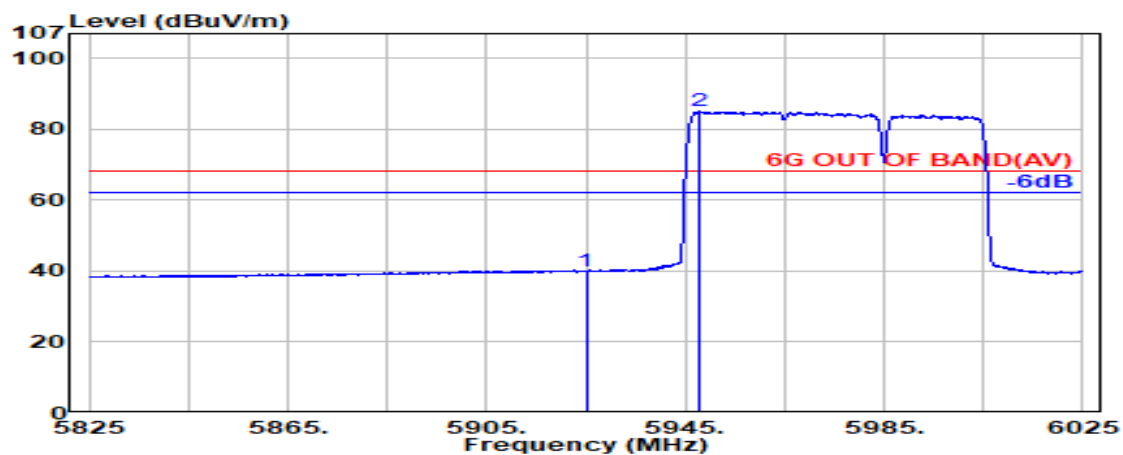

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 31.06             | 39.88                   | 68.20           | 28.32       | Average  |
| @ 5947.800               | 34.29                 | 9.00            | 34.38                  | 76.13             | 85.05                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 90         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

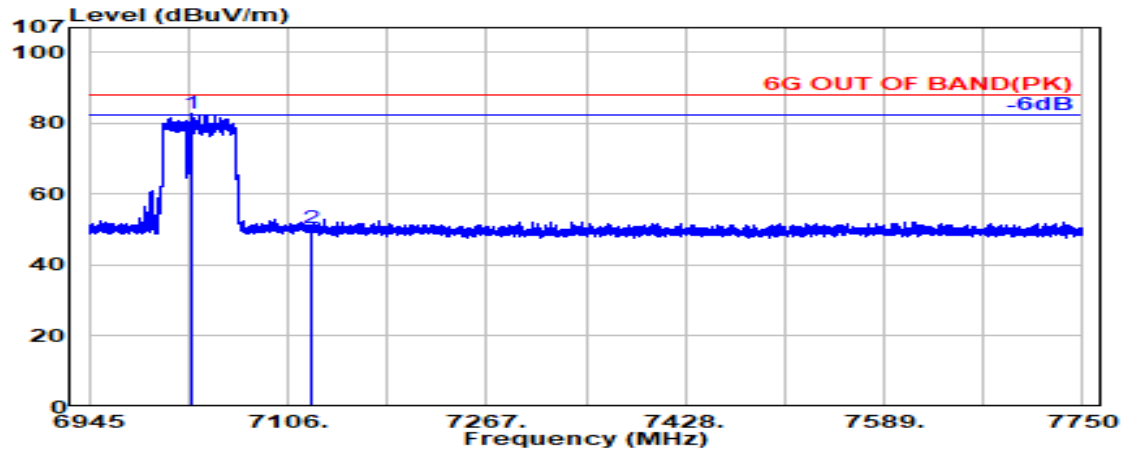

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7027.100               | 35.55                 | 9.74            | 34.42                  | 72.02             | 82.89                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 39.15             | 50.36                   | 88.20           | 37.84       | Peak     |

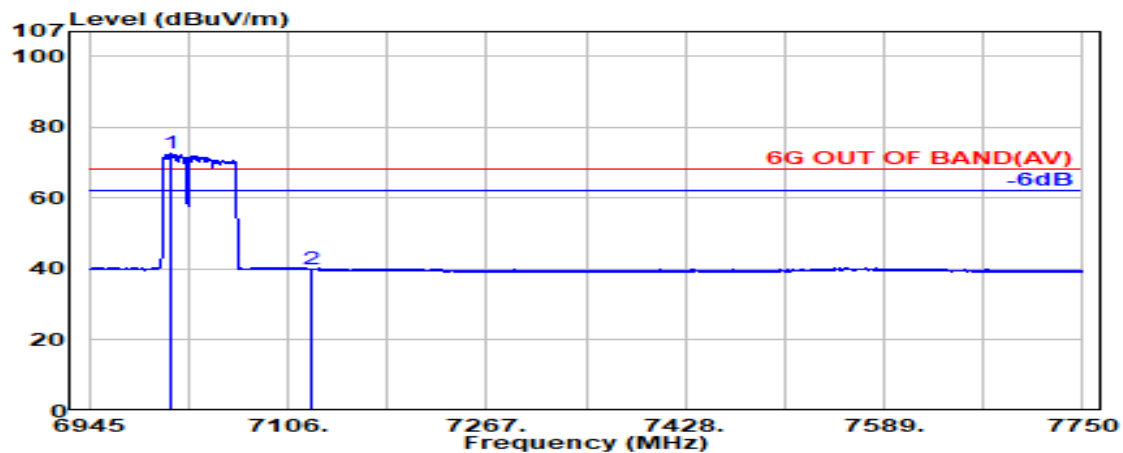

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7010.400               | 35.52                 | 9.73            | 34.41                  | 61.71             | 72.55                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.90             | 40.11                   | 68.20           | 28.09       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 90         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

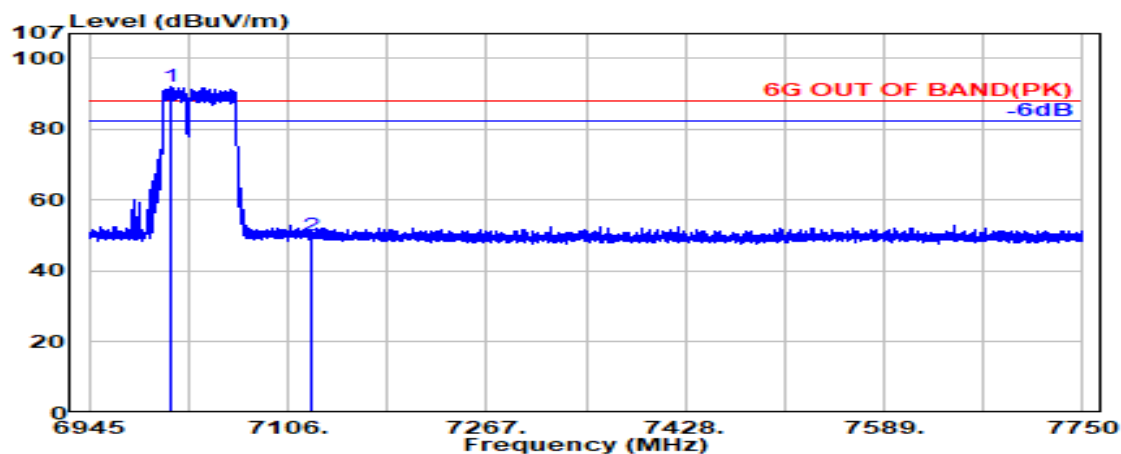

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7011.800               | 35.52                 | 9.73            | 34.41                  | 81.36             | 92.21                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 38.84             | 50.05                   | 88.20           | 38.15       | Peak     |

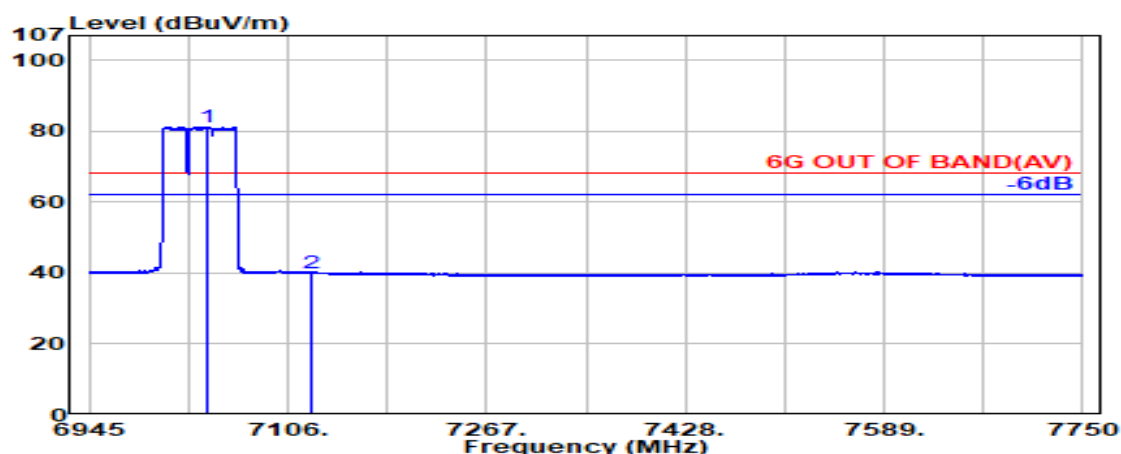

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7041.000               | 35.58                 | 9.75            | 34.43                  | 70.45             | 81.35                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 28.79             | 40.00                   | 68.20           | 28.20       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | S95        |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

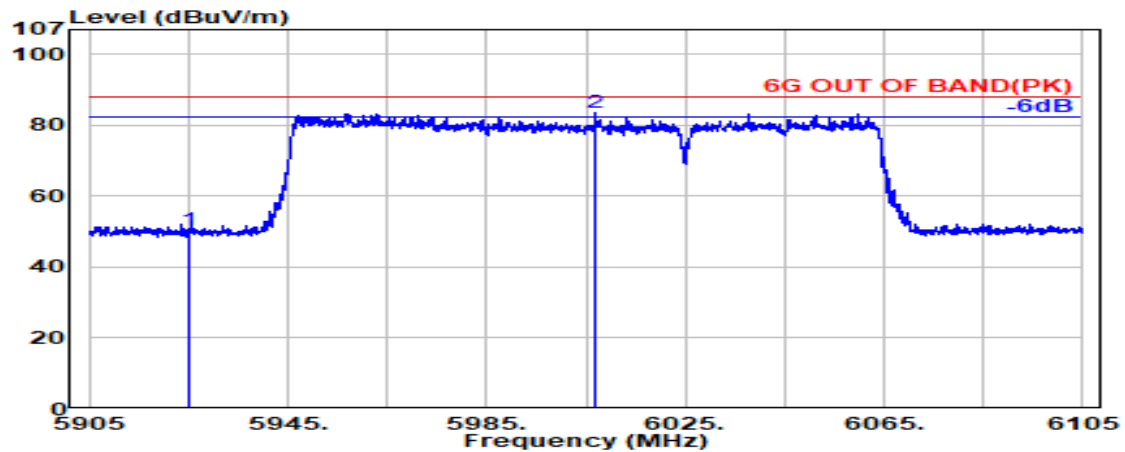

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.45             | 50.28                   | 88.20           | 37.92       | Peak     |
| @ 6006.700               | 34.20                 | 9.03            | 34.40            | 74.60             | 83.44                   | ---             | ---         | Peak     |

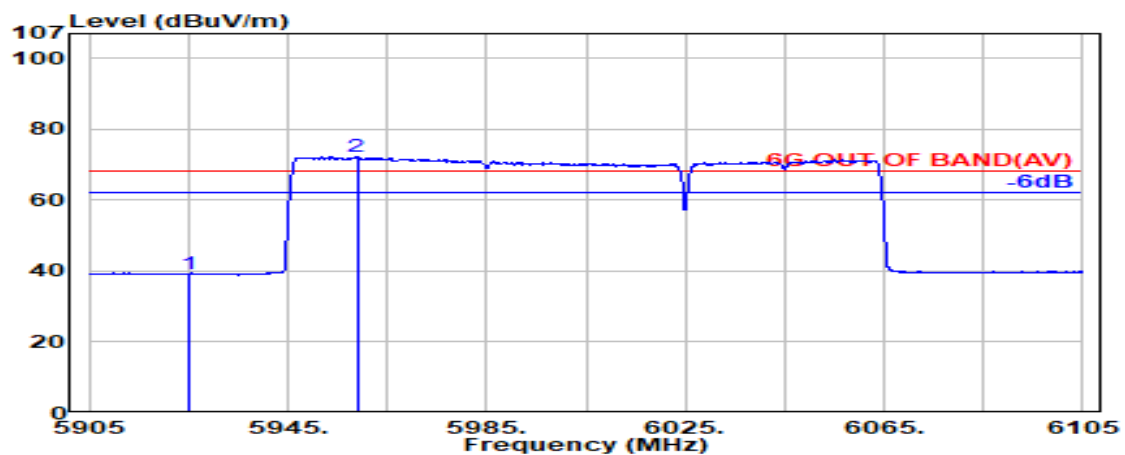

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 30.35             | 39.18                   | 68.20           | 29.02       | Average  |
| @ 5958.900               | 34.28                 | 9.01            | 34.38            | 63.29             | 72.20                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | S95        |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

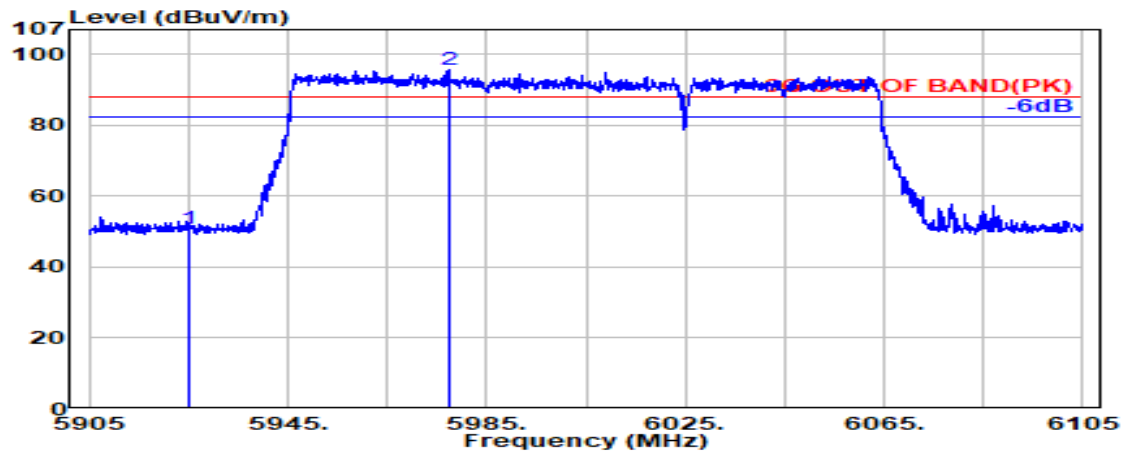

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 42.02             | 50.84                   | 88.20           | 37.36       | Peak     |
| @ 5977.300               | 34.25                 | 9.02            | 34.39            | 86.70             | 95.58                   | ---             | ---         | Peak     |

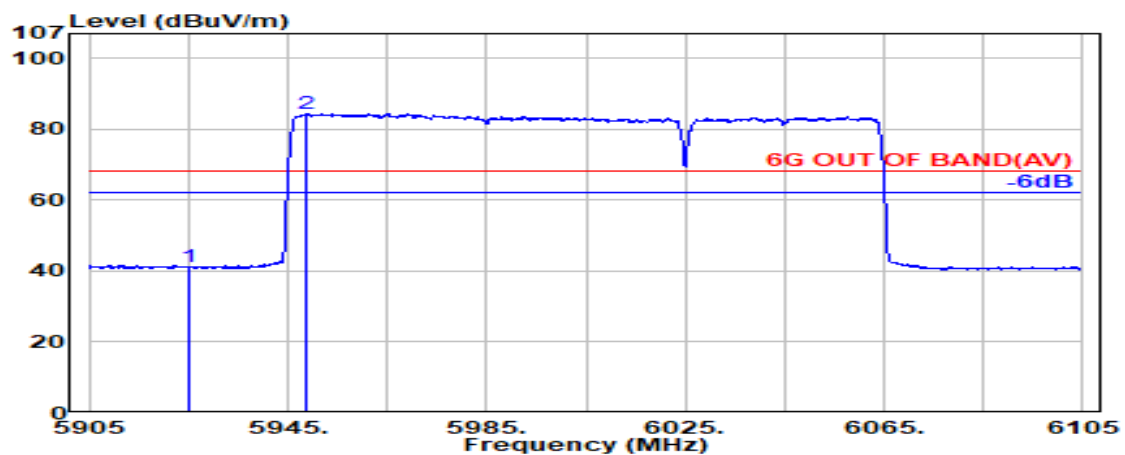

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 32.33             | 41.16                   | 68.20           | 27.04       | Average  |
| @ 5948.700               | 34.29                 | 9.00            | 34.38            | 75.48             | 84.40                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 94         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

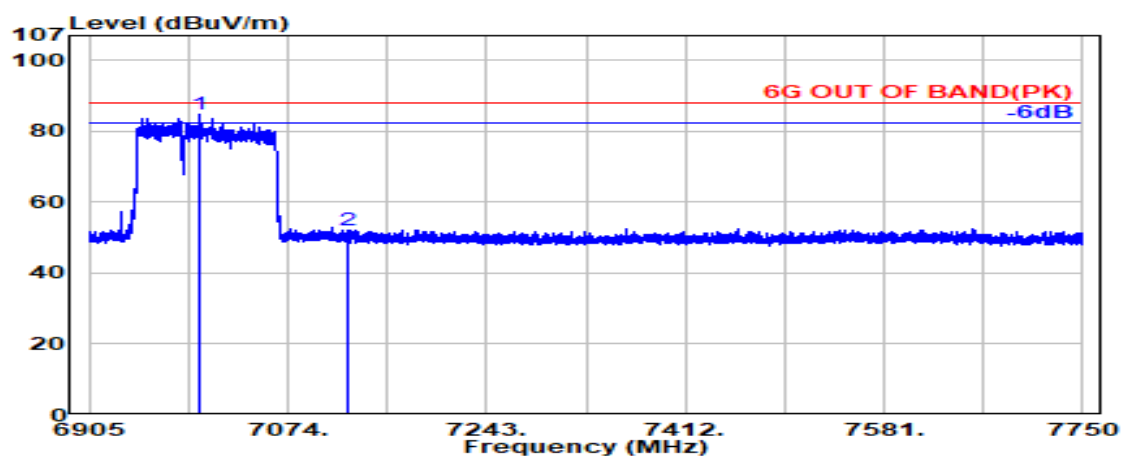

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6999.100               | 35.50                 | 9.72            | 34.40            | 74.03             | 84.85                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 40.72             | 51.93                   | 88.20           | 36.27       | Peak     |

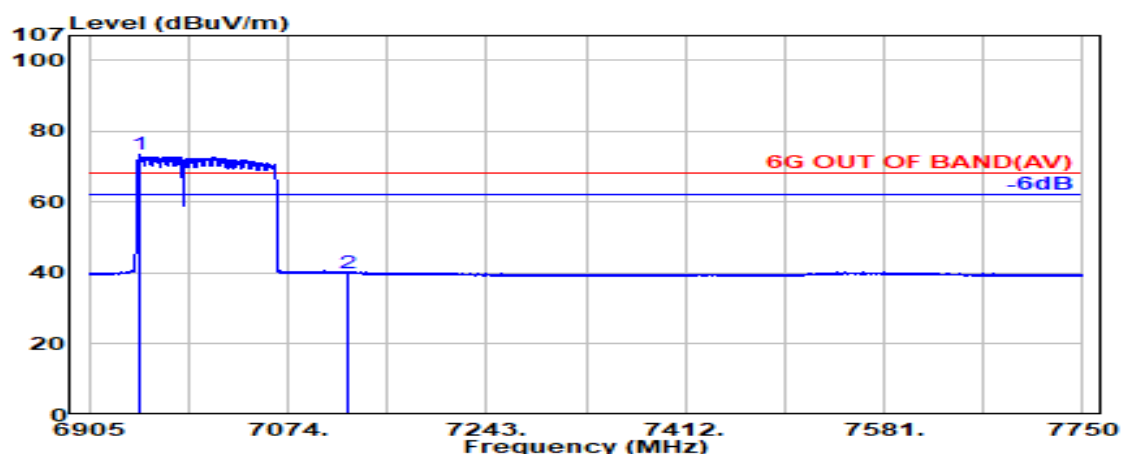

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6947.800               | 35.50                 | 9.69            | 34.37            | 62.51             | 73.32                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 28.73             | 39.94                   | 68.20           | 28.26       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 94         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

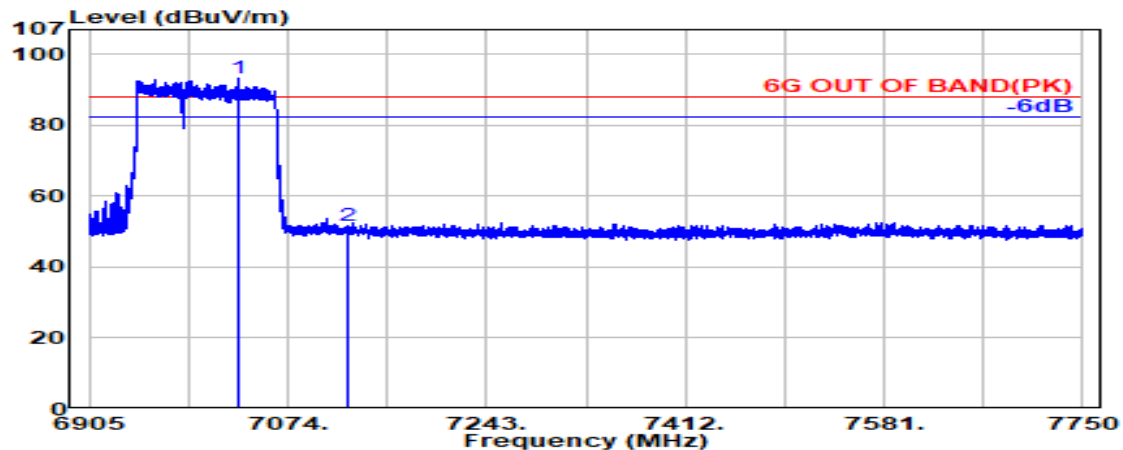

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7032.000               | 35.56                 | 9.74            | 34.42            | 82.53             | 93.41                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 40.39             | 51.60                   | 88.20           | 36.60       | Peak     |

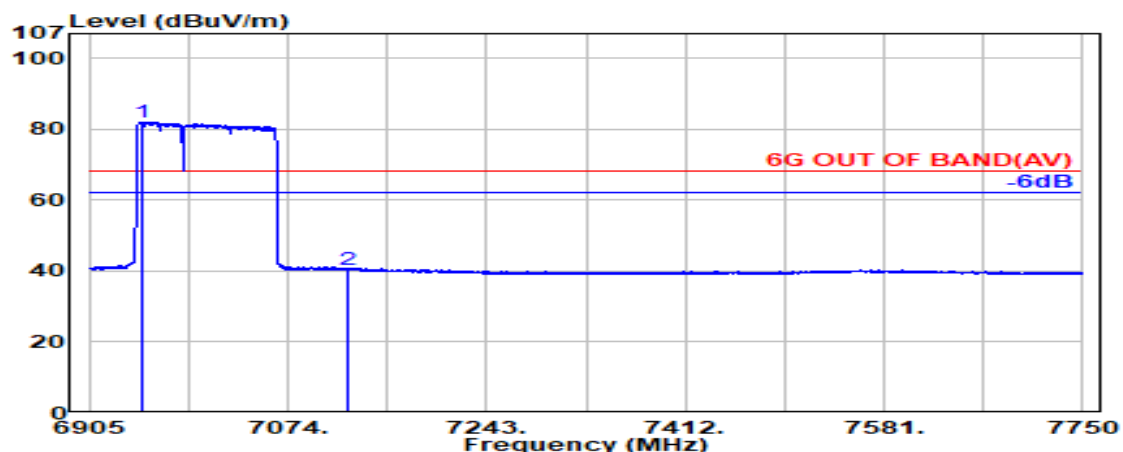

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6950.200               | 35.50                 | 9.69            | 34.37            | 71.31             | 82.12                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 29.18             | 40.39                   | 68.20           | 27.81       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | 98         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

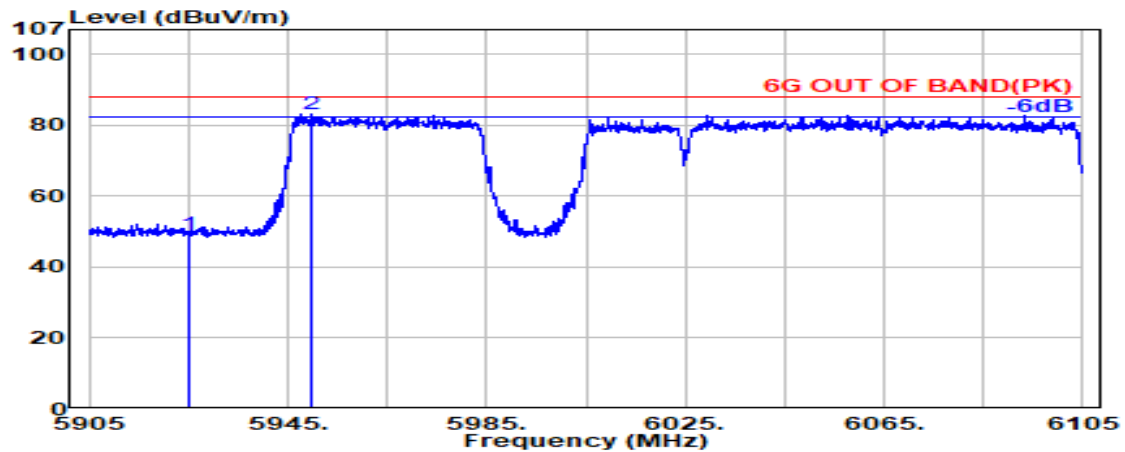

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 40.57             | 49.39                   | 88.20           | 38.81       | Peak     |
| @ 5949.600               | 34.30                 | 9.00            | 34.38                  | 74.42             | 83.35                   | ---             | ---         | Peak     |

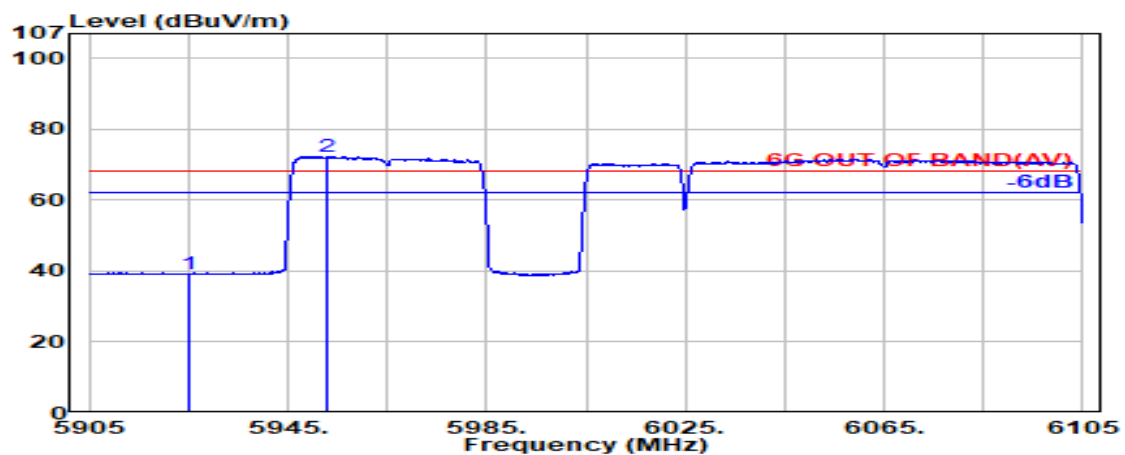

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 30.43             | 39.25                   | 68.20           | 28.95       | Average  |
| @ 5953.000               | 34.29                 | 9.00            | 34.38                  | 63.50             | 72.42                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | 98         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

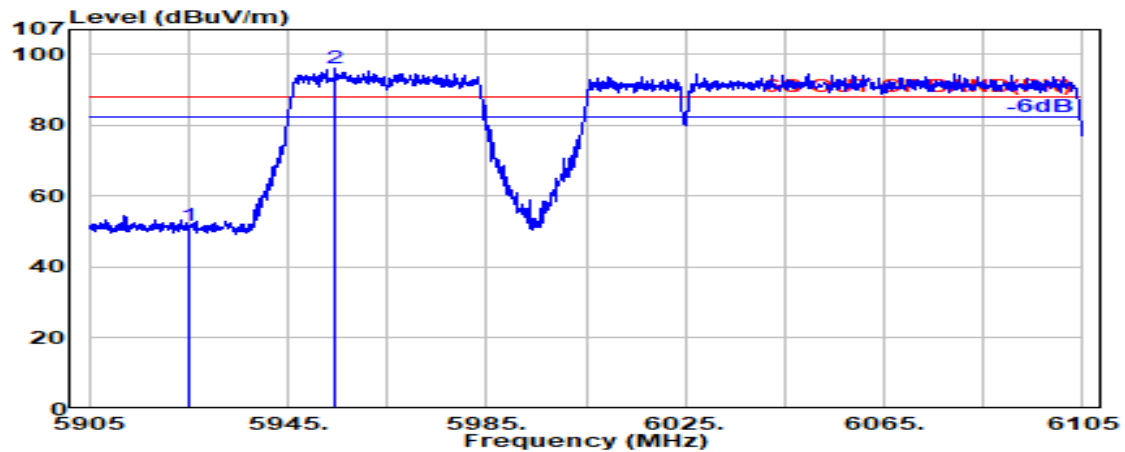

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.69             | 51.51                   | 88.20           | 36.69       | Peak     |
| @ 5954.600               | 34.29                 | 9.01            | 34.38                  | 87.04             | 95.95                   | ---             | ---         | Peak     |

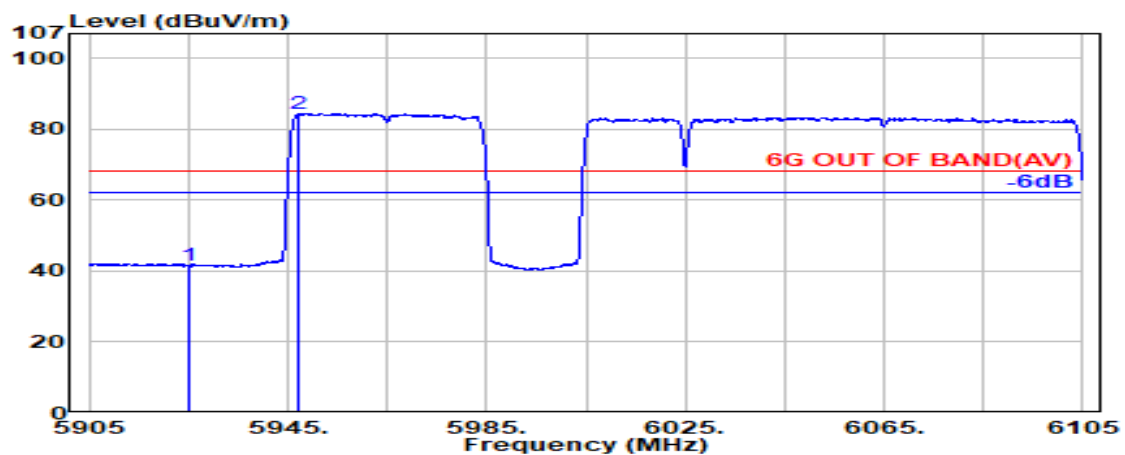

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 32.79             | 41.61                   | 68.20           | 26.59       | Average  |
| @ 5947.300               | 34.29                 | 9.00            | 34.38                  | 75.59             | 84.50                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.