

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands	6
A.2.2 Emissions outside the frequency band:	248
A.2.3 Emissions in Non-restricted Frequency Bands:	257
A.3 DTS/OCCUPIED BANDWIDTH	258
A.3.1 DTS/Occupied Bandwidth Result	258
A.3.2 Measurement Plots	260
A.4 MAXIMUM PEAK OUTPUT POWER	268
A.4.1 Peak Output Power	268
A.4.2 Average Output Power (Reporting only)	278
A.5 EMISSION LIMITATIONS	286
A.6 POWER SPECTRAL DENSITY	320
A.6.1 Power Spectral Density Result	320
A.6.2 Measurement Plots	323

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	SKU #1 (with INPOAQ ANT)		

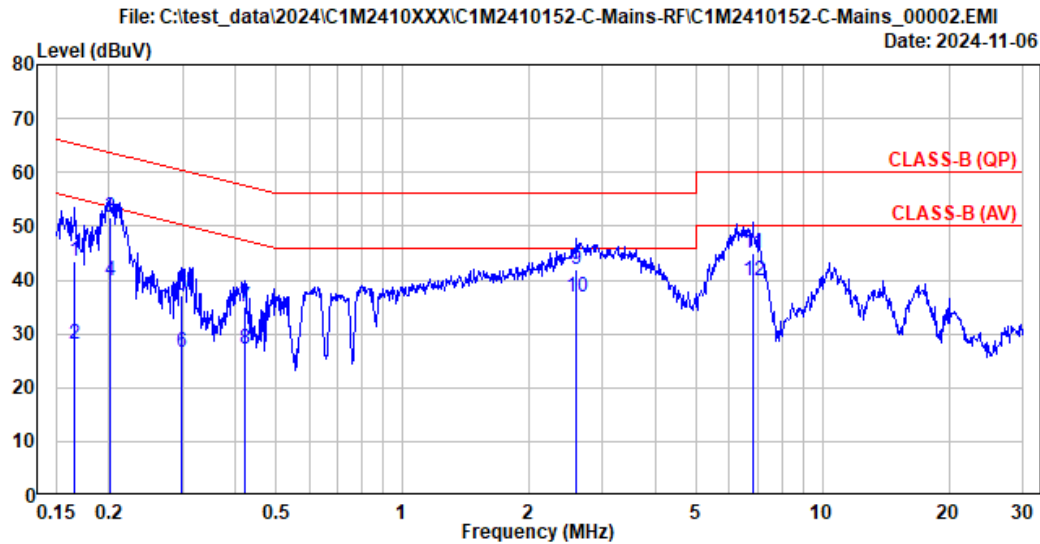

Site No. : No.8 Shielded Room
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B (QP)
Environment : 25°C/62%
EUT Model : 17Z90T
Test Mode : Operating
INPAQ

Data No. : 2
Phase : Line
Test Rating : 120Vac/60Hz
Engineer : Nick Du

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.166	10.26	0.03	9.85	23.36	43.50	65.17	21.67	QP
2	0.166	10.26	0.03	9.85	8.05	28.19	55.17	26.98	Average
3	0.202	10.25	0.03	9.85	31.55	51.68	63.52	11.84	QP
4	0.202	10.25	0.03	9.85	19.74	39.87	53.52	13.65	Average
5	0.297	10.25	0.03	9.85	16.97	37.10	60.33	23.23	QP
6	0.297	10.25	0.03	9.85	6.53	26.66	50.33	23.67	Average
7	0.421	10.25	0.03	9.85	14.85	34.98	57.43	22.45	QP
8	0.421	10.25	0.03	9.85	6.92	27.05	47.43	20.38	Average
9	2.596	10.29	0.07	9.86	21.64	41.86	56.00	14.14	QP
10	2.596	10.29	0.07	9.86	16.49	36.71	46.00	9.29	Average
11	6.827	10.39	0.11	9.87	24.66	45.03	60.00	14.97	QP
12	6.827	10.39	0.11	9.87	19.60	39.97	50.00	10.03	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	SKU #1 (with INPOAQ ANT)		

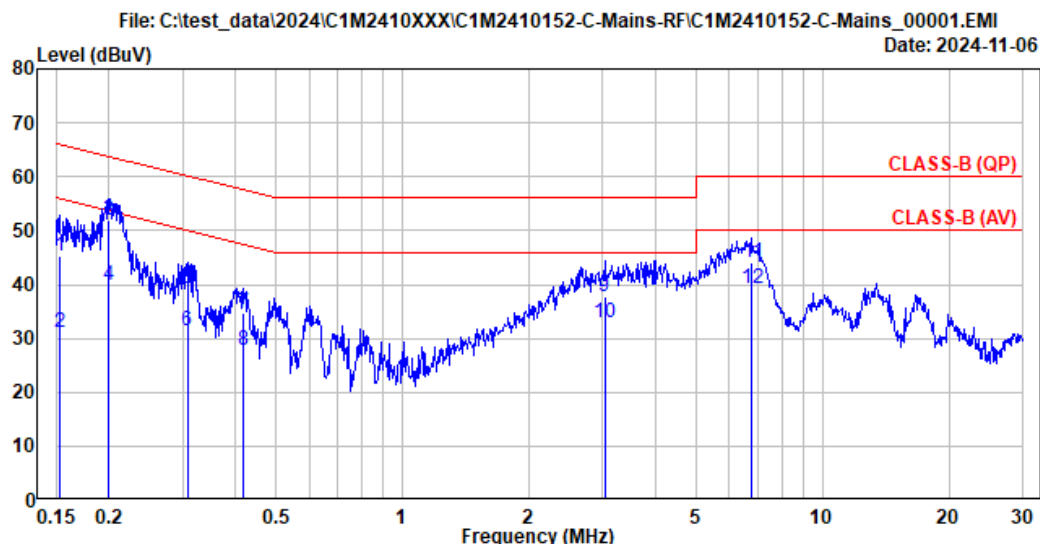

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90T	Engineer	: Nick Du
Test Mode	: Operating INPAQ		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.27	0.03	9.85	25.20	45.35	65.88	20.53	QP
2	0.152	10.27	0.03	9.85	10.91	31.06	55.88	24.82	Average
3	0.199	10.26	0.03	9.85	31.82	51.96	63.64	11.68	QP
4	0.199	10.26	0.03	9.85	19.61	39.75	53.64	13.89	Average
5	0.307	10.26	0.03	9.85	19.17	39.31	60.04	20.73	QP
6	0.307	10.26	0.03	9.85	11.19	31.33	50.04	18.71	Average
7	0.419	10.26	0.03	9.85	14.53	34.67	57.47	22.80	QP
8	0.419	10.26	0.03	9.85	7.66	27.80	47.47	19.67	Average
9	3.030	10.32	0.07	9.86	17.45	37.70	56.00	18.30	QP
10	3.030	10.32	0.07	9.86	12.72	32.97	46.00	13.03	Average
11	6.793	10.47	0.11	9.87	23.61	44.06	60.00	15.94	QP
12	6.793	10.47	0.11	9.87	18.83	39.28	50.00	10.72	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	SKU #2 (with LUXSHARE-ICT ANT)		

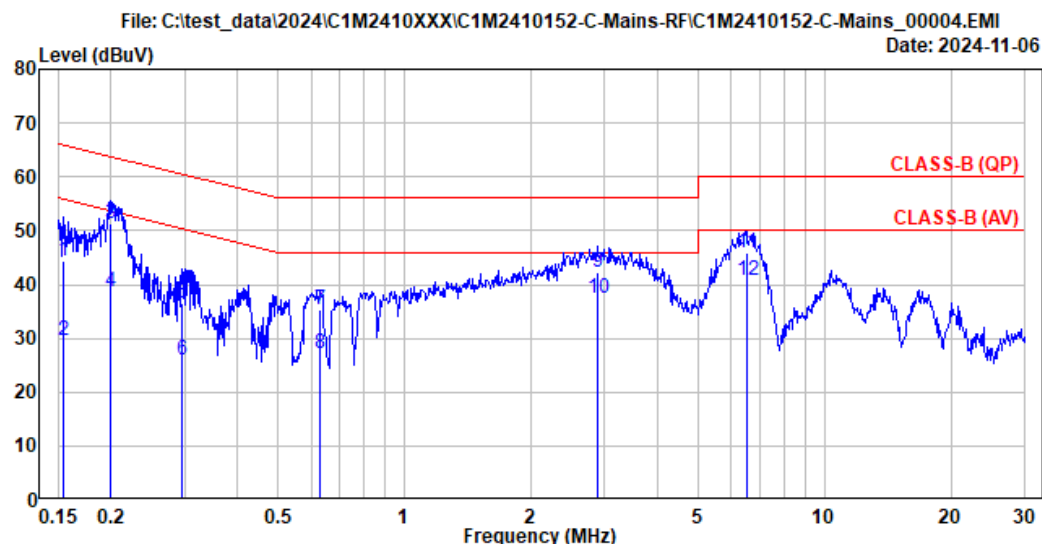

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.26	0.03	9.85	24.28	44.42	65.79	21.37	QP
2	0.154	10.26	0.03	9.85	9.31	29.45	55.79	26.34	Average
3	0.199	10.25	0.03	9.85	31.20	51.33	63.64	12.31	QP
4	0.199	10.25	0.03	9.85	18.48	38.61	53.64	15.03	Average
5	0.295	10.25	0.03	9.85	16.48	36.61	60.37	23.76	QP
6	0.295	10.25	0.03	9.85	5.83	25.96	50.37	24.41	Average
7	0.627	10.25	0.03	9.85	15.04	35.17	56.00	20.83	QP
8	0.627	10.25	0.03	9.85	7.07	27.20	46.00	18.80	Average
9	2.882	10.29	0.07	9.86	22.18	42.40	56.00	13.60	QP
10	2.882	10.29	0.07	9.86	17.08	37.30	46.00	8.70	Average
11	6.527	10.38	0.11	9.87	25.56	45.92	60.00	14.08	QP
12	6.527	10.38	0.11	9.87	20.54	40.90	50.00	9.10	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	SKU #2 (with LUXSHARE-ICT ANT)		

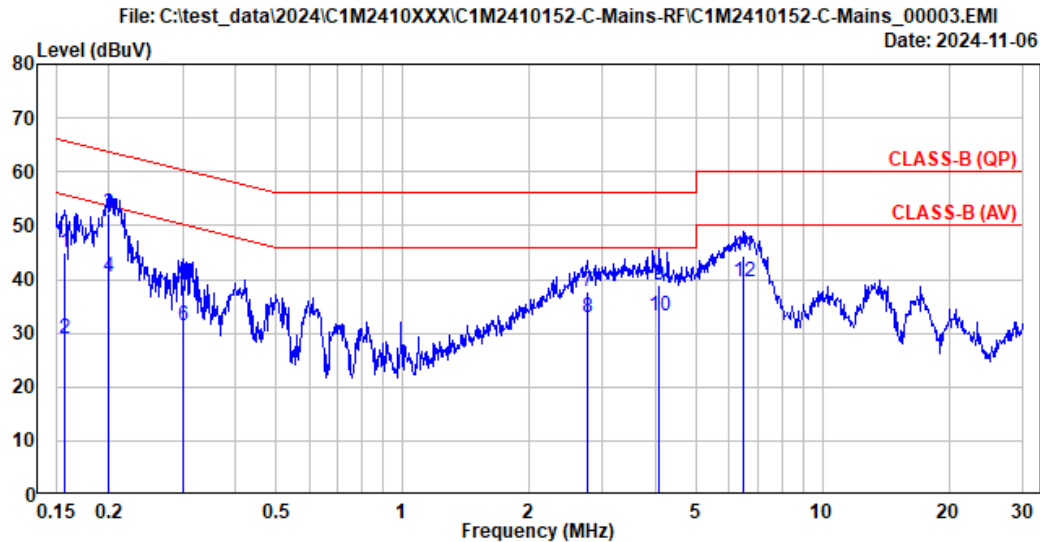

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 17290T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.157	10.27	0.03	9.85	24.72	44.87	65.63	20.76	QP
2	0.157	10.27	0.03	9.85	8.81	28.96	55.63	26.67	Average
3	0.200	10.26	0.03	9.85	31.97	52.11	63.60	11.49	QP
4	0.200	10.26	0.03	9.85	20.21	40.35	53.60	13.25	Average
5	0.301	10.26	0.03	9.85	18.93	39.07	60.20	21.13	QP
6	0.301	10.26	0.03	9.85	11.36	31.50	50.20	18.70	Average
7	2.756	10.31	0.07	9.86	17.62	37.86	56.00	18.14	QP
8	2.756	10.31	0.07	9.86	12.53	32.77	46.00	13.23	Average
9	4.086	10.35	0.08	9.86	18.52	38.81	56.00	17.19	QP
10	4.086	10.35	0.08	9.86	12.90	33.19	46.00	12.81	Average
11	6.463	10.46	0.11	9.87	23.98	44.42	60.00	15.58	QP
12	6.463	10.46	0.11	9.87	19.16	39.60	50.00	10.40	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/10/23 ~ 11/15	Temp./Hum.	23 ~ 25°C/51 ~ 64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu / Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.000	22.25	1.51	26.48	32.59	29.87	40.00	10.13	Peak
147.000	16.53	3.17	26.01	38.96	32.64	43.50	10.86	Peak
240.500	17.34	4.16	25.71	33.33	29.12	46.00	16.88	Peak
384.500	20.76	5.76	26.33	33.34	33.54	46.00	12.46	Peak
467.500	22.31	6.51	26.92	31.82	33.71	46.00	12.29	Peak
531.500	23.24	6.87	27.22	32.68	35.57	46.00	10.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.53	26.48	39.10	36.01	40.00	3.99	Peak
58.000	12.25	1.97	26.42	38.76	26.55	40.00	13.45	Peak
151.500	16.18	3.21	25.99	35.91	29.32	43.50	14.18	Peak
380.000	20.65	5.71	26.29	32.12	32.19	46.00	13.81	Peak
463.000	22.24	6.47	26.89	33.14	34.96	46.00	11.04	Peak
566.000	23.66	6.99	27.31	31.34	34.68	46.00	11.32	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.52	26.48	33.41	30.50	40.00	9.50	Peak
148.000	16.45	3.18	26.01	38.85	32.47	43.50	11.03	Peak
241.000	17.36	4.17	25.71	33.87	29.70	46.00	16.30	Peak
460.000	22.19	6.45	26.87	32.33	34.09	46.00	11.91	Peak
561.500	23.62	6.98	27.30	32.00	35.29	46.00	10.71	Peak
661.000	24.35	7.43	27.42	32.10	36.47	46.00	9.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.53	26.48	39.55	36.46	40.00	3.54	Peak
58.500	12.14	1.98	26.42	39.19	26.89	40.00	13.11	Peak
152.500	16.10	3.22	25.99	35.94	29.28	43.50	14.22	Peak
339.000	19.66	5.22	25.96	31.34	30.25	46.00	15.75	Peak
436.000	21.78	6.25	26.71	32.99	34.31	46.00	11.69	Peak
545.500	23.42	6.92	27.26	31.90	34.98	46.00	11.02	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.000	22.25	1.51	26.48	32.64	29.91	40.00	10.09	Peak
127.500	17.58	2.94	26.11	34.70	29.11	43.50	14.39	Peak
151.000	16.22	3.21	25.99	38.61	32.05	43.50	11.45	Peak
387.000	20.81	5.79	26.34	33.91	34.16	46.00	11.84	Peak
564.500	23.65	6.99	27.31	32.11	35.44	46.00	10.56	Peak
653.000	24.31	7.39	27.42	31.81	36.10	46.00	9.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.53	26.48	39.16	36.07	40.00	3.93	Peak
57.000	12.47	1.95	26.43	38.05	26.04	40.00	13.96	Peak
154.500	15.99	3.24	25.98	35.07	28.33	43.50	15.17	Peak
253.500	17.91	4.29	25.68	32.15	28.67	46.00	17.33	Peak
386.500	20.80	5.78	26.34	33.03	33.27	46.00	12.73	Peak
484.500	22.58	6.64	27.03	33.42	35.61	46.00	10.39	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.500	22.47	1.50	26.48	32.83	30.32	40.00	9.68	Peak
101.500	16.51	2.63	26.28	35.38	28.24	43.50	15.26	Peak
148.500	16.41	3.18	26.00	38.79	32.38	43.50	11.12	Peak
406.000	21.21	5.99	26.49	32.11	32.82	46.00	13.18	Peak
503.500	22.86	6.77	27.14	33.20	35.69	46.00	10.31	Peak
671.000	24.40	7.48	27.42	31.86	36.31	46.00	9.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.53	26.48	40.08	36.99	40.00	3.01	Peak
57.500	12.36	1.96	26.43	39.15	27.04	40.00	12.96	Peak
152.000	16.14	3.22	25.99	35.81	29.18	43.50	14.32	Peak
384.000	20.75	5.75	26.32	33.21	33.39	46.00	12.61	Peak
485.000	22.59	6.65	27.04	32.40	34.61	46.00	11.39	Peak
553.500	23.52	6.95	27.28	33.26	36.44	46.00	9.56	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

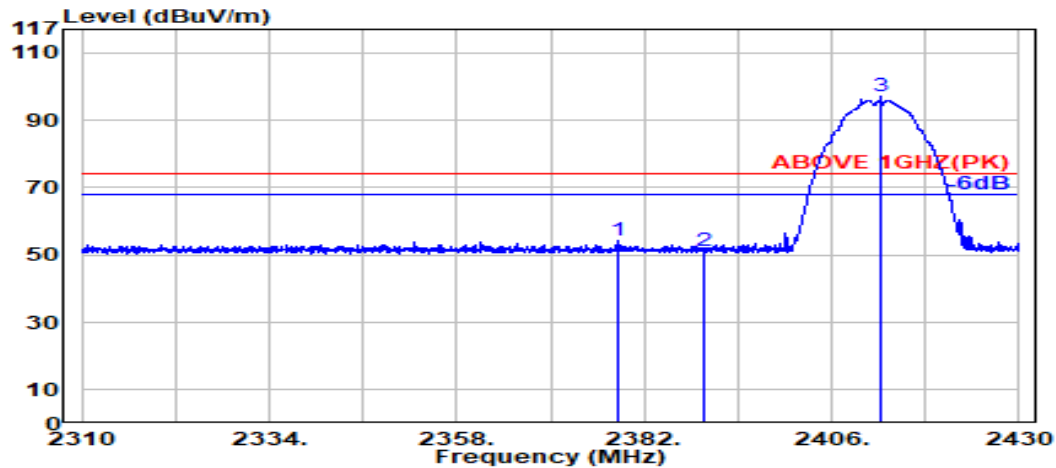

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.550	28.27	6.02	34.50	54.32	54.12	74.00	19.88	Peak
2389.800	28.18	6.03	34.50	51.64	51.36	74.00	22.64	Peak
@ 2412.400	28.17	6.07	34.50	97.27	97.01	---	---	Peak

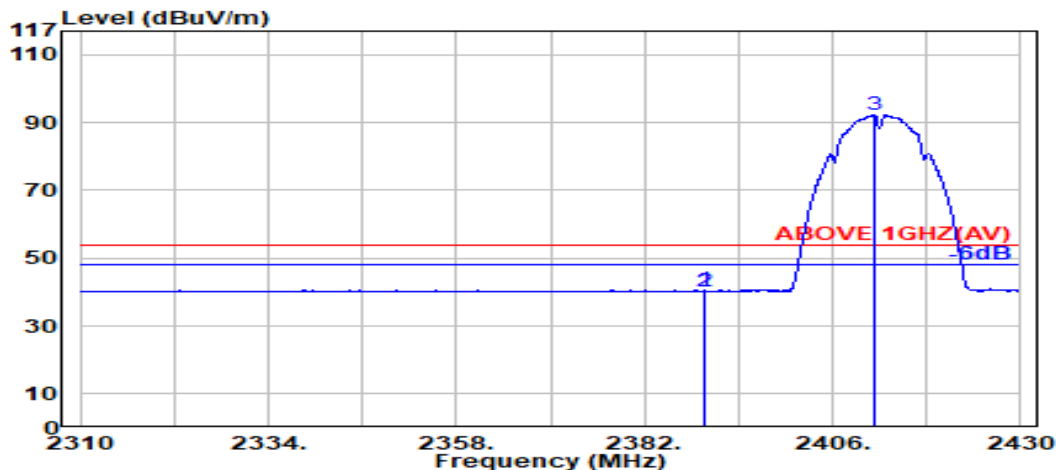

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	40.92	40.64	54.00	13.36	Average
2389.800	28.18	6.03	34.50	40.49	40.21	54.00	13.79	Average
@ 2411.250	28.17	6.07	34.50	92.70	92.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

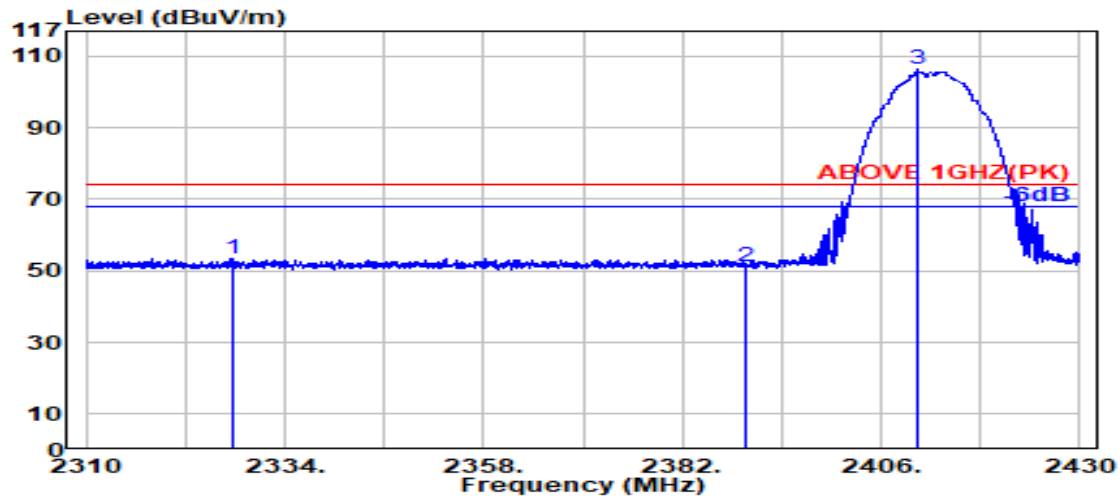

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2327.650	28.32	5.94	34.48	53.68	53.46	74.00	20.54	Peak
2389.800	28.18	6.03	34.50	51.28	51.00	74.00	23.00	Peak
@ 2410.400	28.16	6.06	34.50	106.65	106.38	---	---	Peak

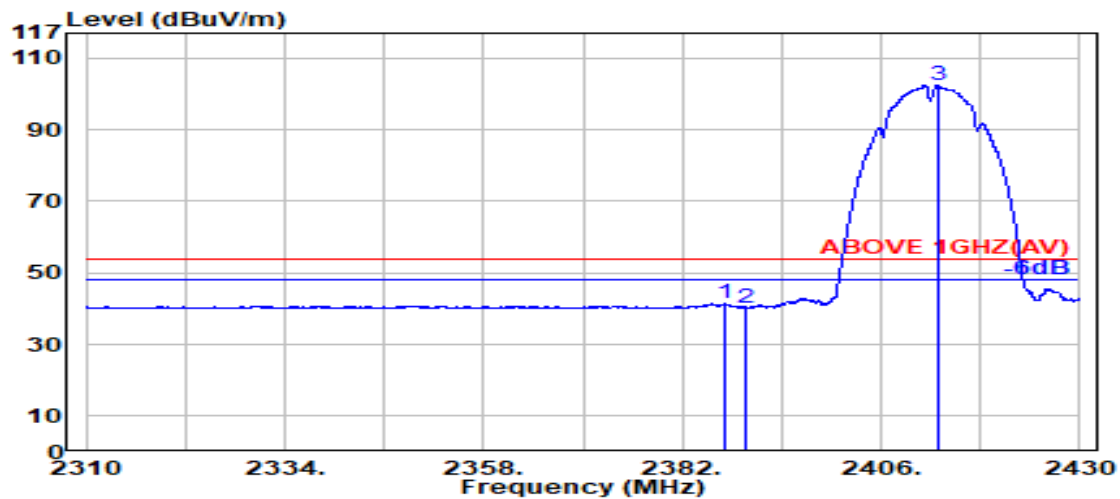

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	28.20	6.03	34.50	41.75	41.48	54.00	12.52	Average
2389.800	28.18	6.03	34.50	40.55	40.26	54.00	13.74	Average
@ 2412.850	28.18	6.07	34.50	102.55	102.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

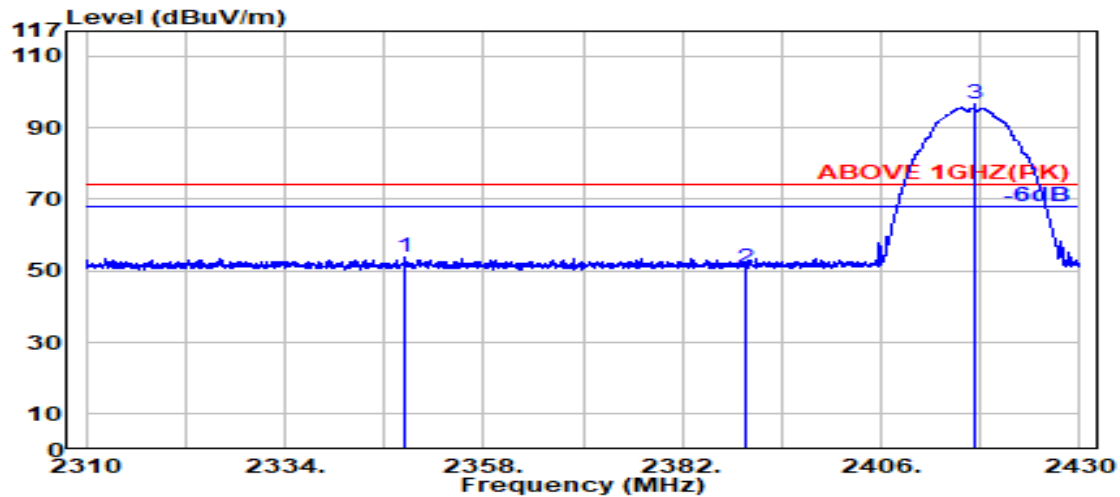

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2348.500	28.49	5.97	34.49	53.83	53.81	74.00	20.19	Peak
2389.800	28.18	6.03	34.50	51.01	50.72	74.00	23.28	Peak
@ 2417.250	28.20	6.07	34.50	96.79	96.56	---	---	Peak

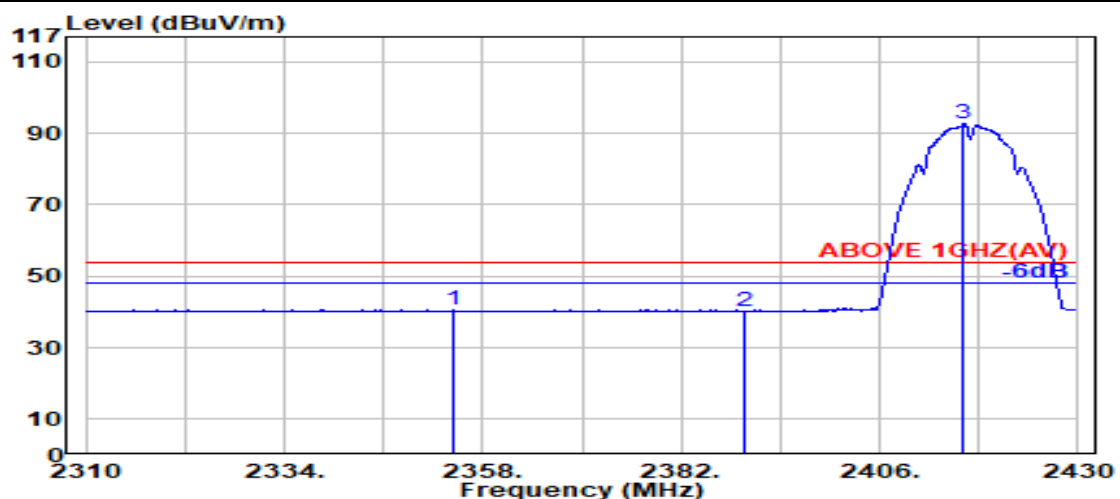


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.450	28.46	5.98	34.49	40.60	40.56	54.00	13.44	Average
2389.800	28.18	6.03	34.50	40.51	40.22	54.00	13.78	Average
@ 2416.200	28.20	6.07	34.50	92.76	92.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

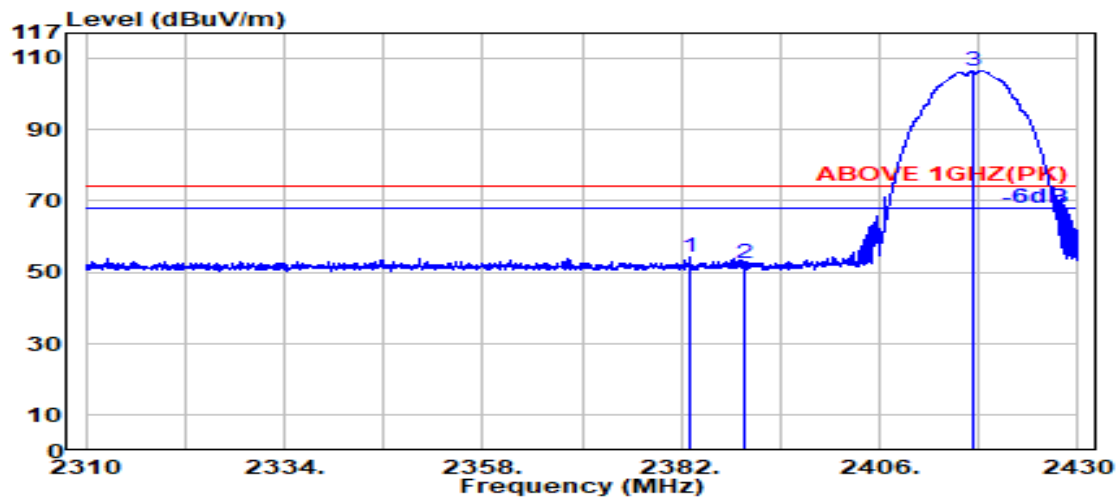

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2383.100	28.23	6.02	34.50	54.33	54.09	74.00	19.91	Peak
2389.800	28.18	6.03	34.50	52.81	52.53	74.00	21.47	Peak
@ 2417.200	28.20	6.07	34.50	106.84	106.61	---	---	Peak

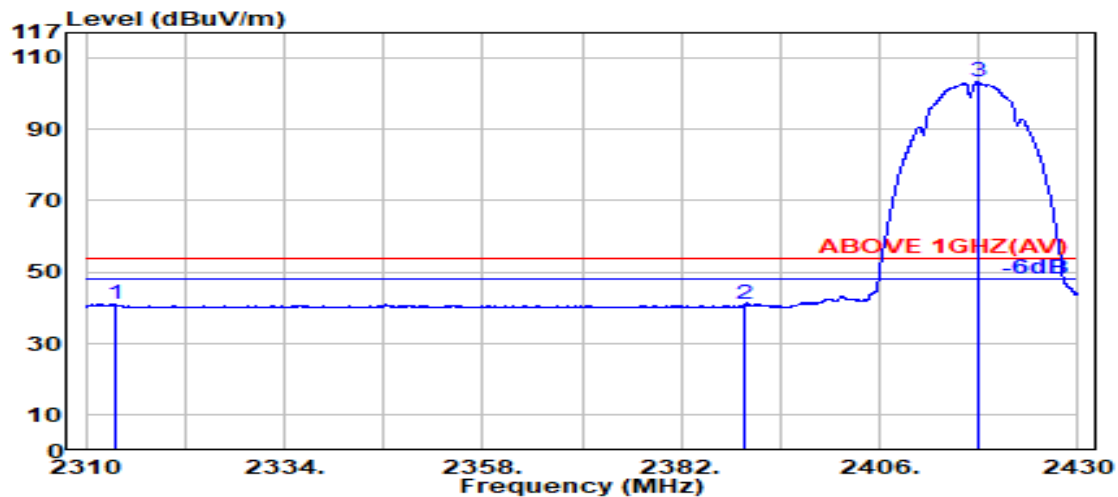

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2313.650	28.21	5.92	34.48	41.37	41.02	54.00	12.98	Average
2389.800	28.18	6.03	34.50	41.42	41.14	54.00	12.86	Average
@ 2417.800	28.21	6.07	34.50	103.40	103.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

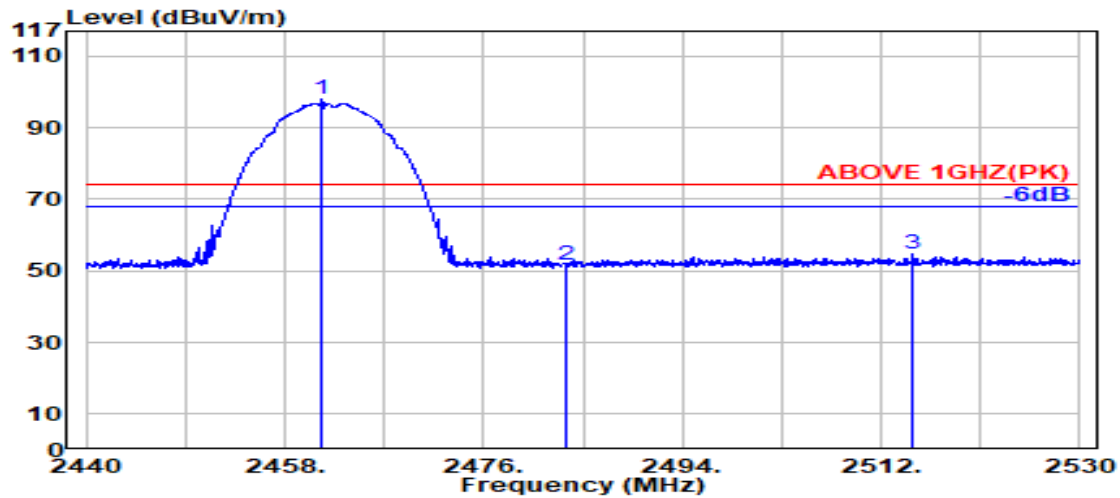

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.400	28.42	6.14	34.51	97.94	97.98	---	---	Peak
2483.500	28.47	6.17	34.52	51.36	51.47	74.00	22.53	Peak
2514.800	28.59	6.21	34.52	54.37	54.64	74.00	19.36	Peak

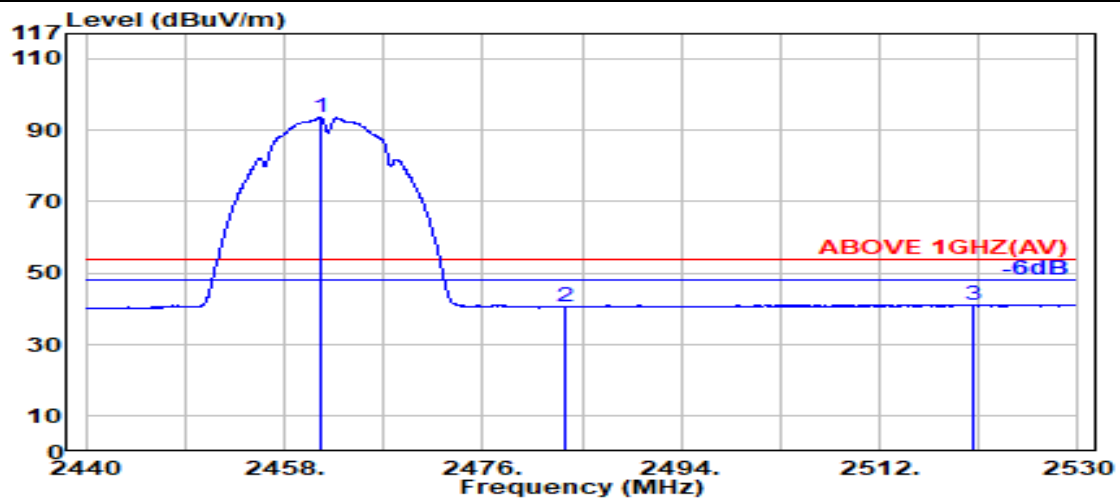

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.42	6.14	34.51	93.45	93.50	---	---	Average
2483.500	28.47	6.17	34.52	40.49	40.61	54.00	13.39	Average
2520.450	28.62	6.21	34.52	40.93	41.24	54.00	12.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

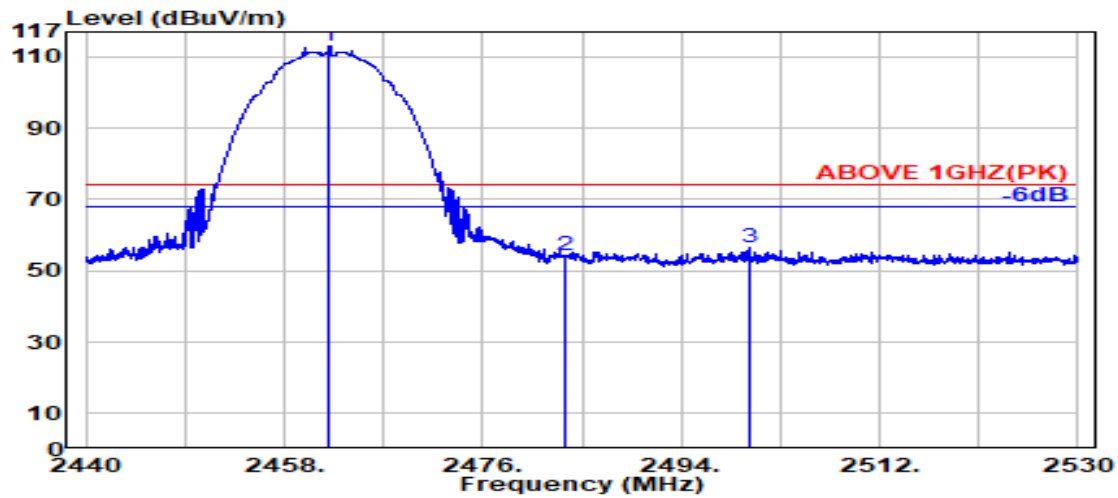

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.000	28.42	6.14	34.51	112.94	112.99	---	---	Peak
2483.500	28.47	6.17	34.52	54.04	54.15	74.00	19.85	Peak
2500.150	28.50	6.19	34.52	56.23	56.40	74.00	17.60	Peak

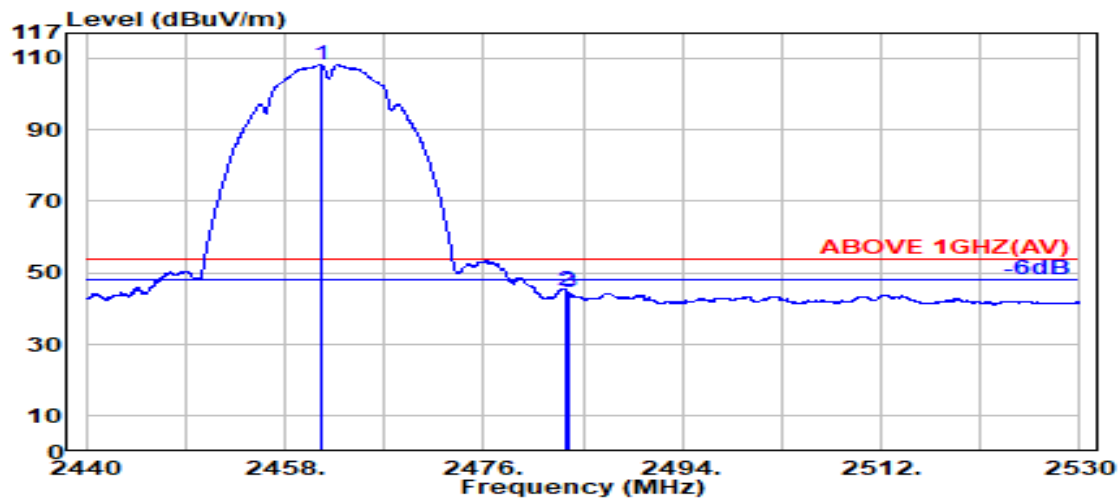

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.250	28.42	6.14	34.51	108.27	108.32	---	---	Average
2483.500	28.47	6.17	34.52	45.05	45.16	54.00	8.84	Average
2483.750	28.47	6.17	34.52	44.29	44.41	54.00	9.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

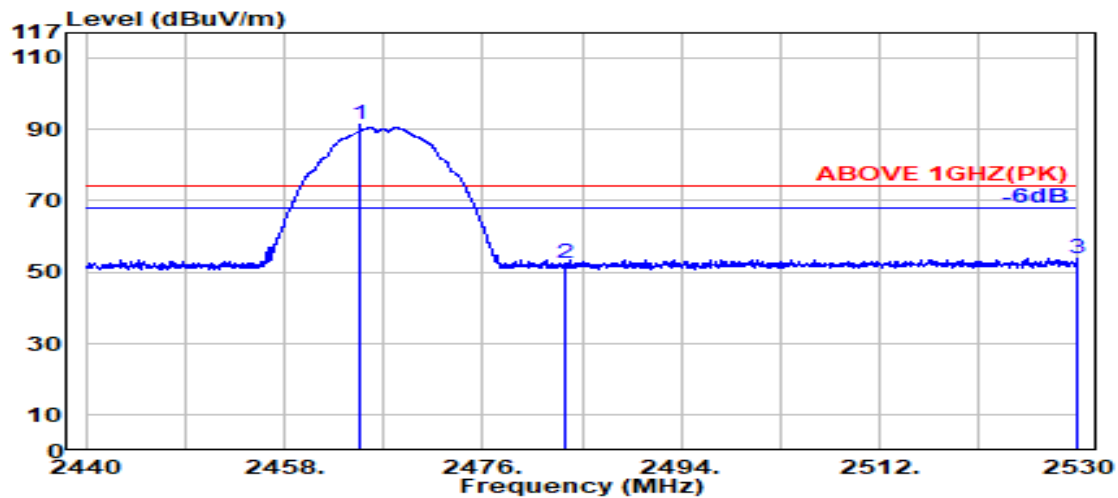

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.850	28.43	6.14	34.51	91.22	91.28	---	---	Peak
2483.500	28.47	6.17	34.52	52.53	52.64	74.00	21.36	Peak
2529.850	28.68	6.23	34.53	53.49	53.87	74.00	20.13	Peak

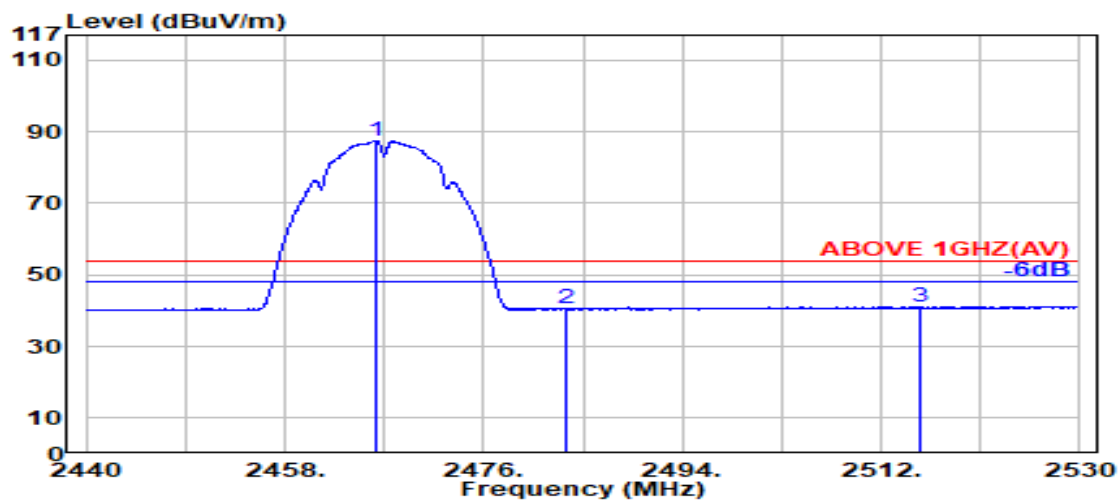


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	6.14	34.51	87.55	87.62	---	---	Average
2483.500	28.47	6.17	34.52	40.53	40.65	54.00	13.35	Average
2515.550	28.59	6.21	34.52	40.83	41.11	54.00	12.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

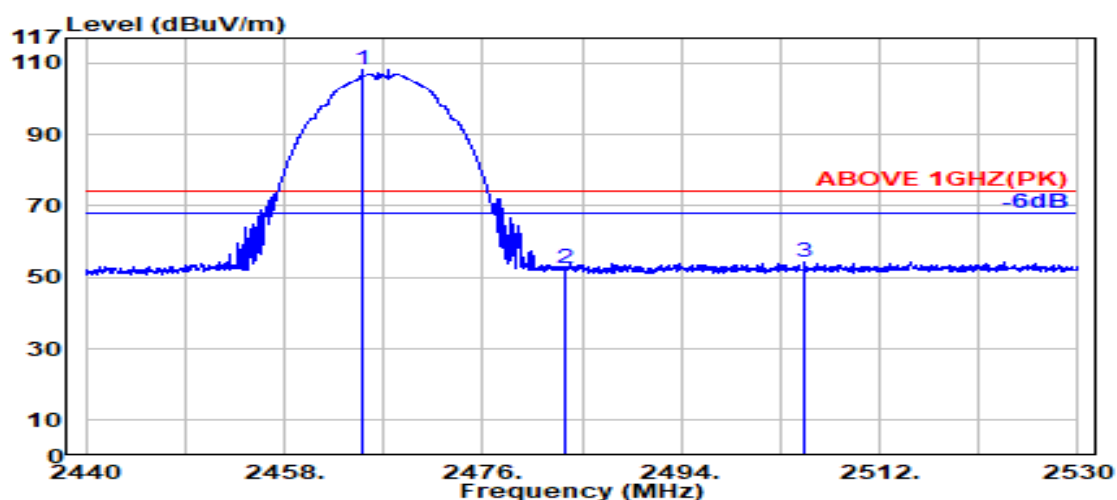

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.100	28.43	6.14	34.51	108.19	108.24	---	---	Peak
2483.500	28.47	6.17	34.52	52.44	52.55	74.00	21.45	Peak
2505.200	28.53	6.20	34.52	54.32	54.53	74.00	19.47	Peak

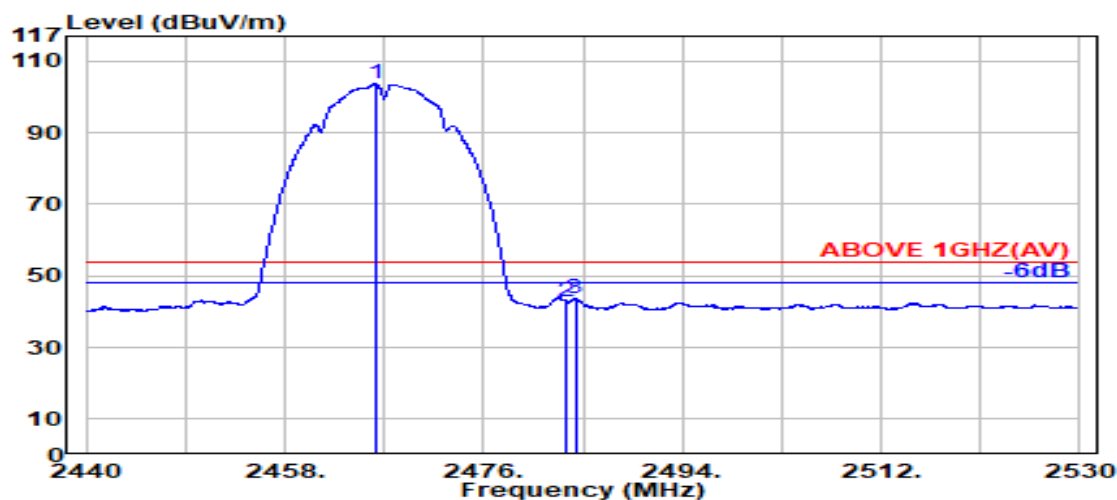

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	103.63	103.69	---	---	Average
2483.500	28.47	6.17	34.52	42.79	42.91	54.00	11.09	Average
2484.300	28.47	6.17	34.52	43.46	43.58	54.00	10.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

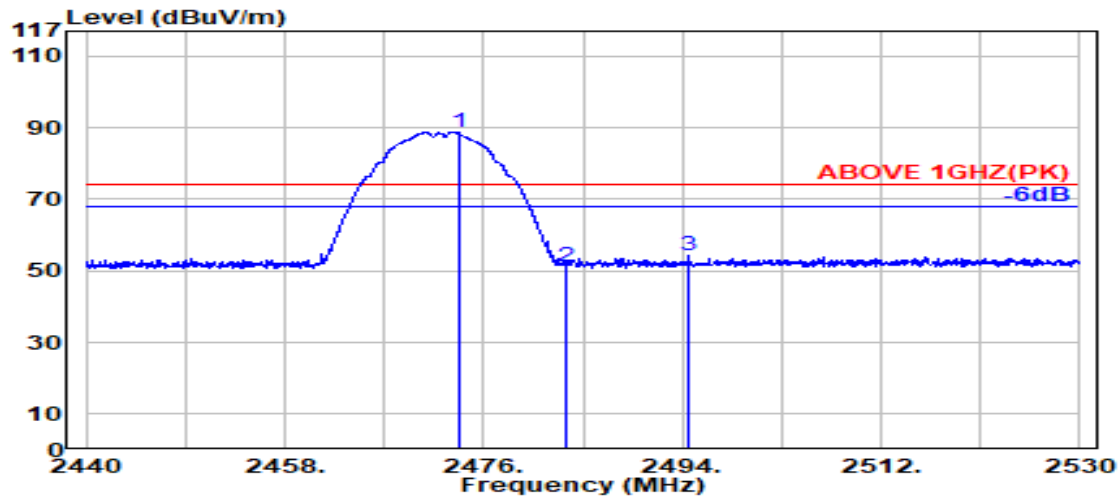

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.750	28.45	6.15	34.51	88.67	88.75	---	---	Peak
	2483.500	28.47	6.17	34.52	50.96	51.08	74.00	22.92	Peak
	2494.550	28.49	6.18	34.52	54.15	54.30	74.00	19.70	Peak

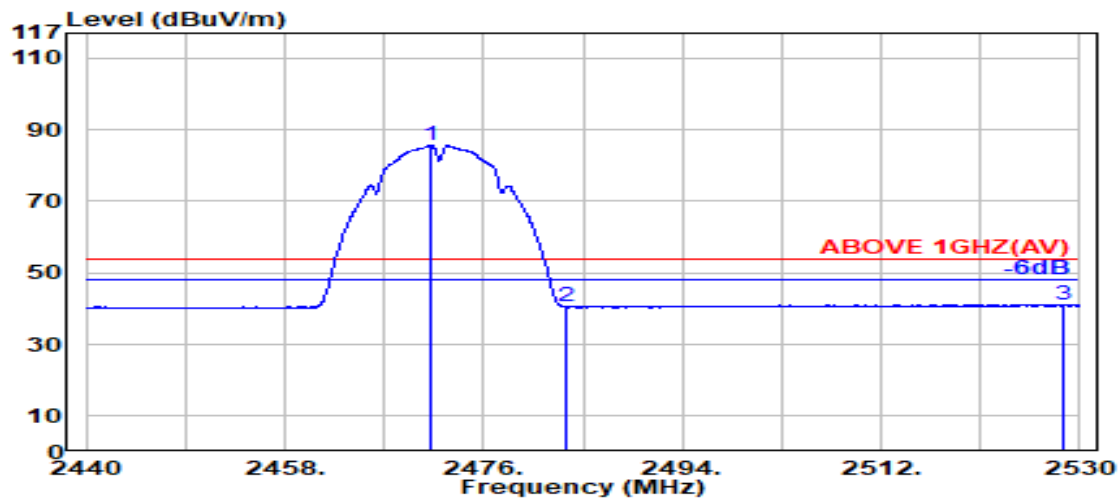

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2471.250	28.44	6.15	34.51	85.73	85.81	---	---	Average
	2483.500	28.47	6.17	34.52	40.29	40.40	54.00	13.60	Average
	2528.600	28.67	6.22	34.53	40.77	41.14	54.00	12.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

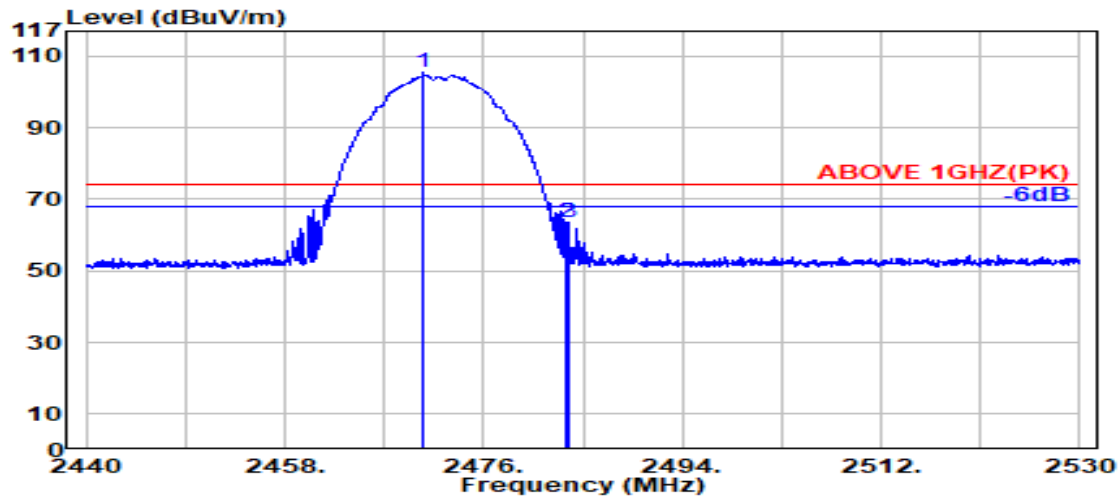

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.450	28.44	6.15	34.51	105.37	105.45	---	---	Peak
2483.500	28.47	6.17	34.52	63.54	63.66	74.00	10.34	Peak
2483.750	28.47	6.17	34.52	63.25	63.37	74.00	10.63	Peak

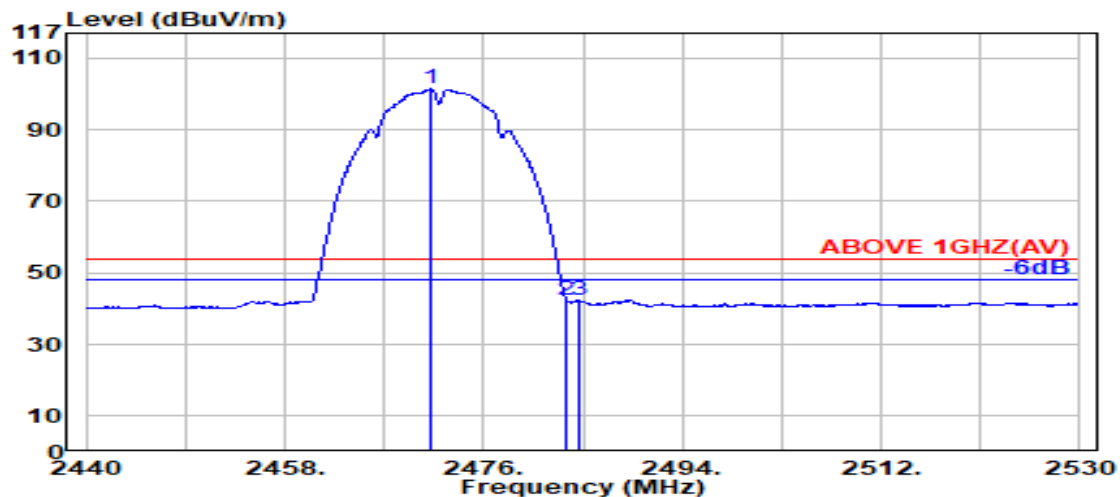


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.150	28.44	6.15	34.51	101.33	101.41	---	---	Average
2483.500	28.47	6.17	34.52	42.33	42.45	54.00	11.55	Average
2484.600	28.47	6.17	34.52	42.47	42.59	54.00	11.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

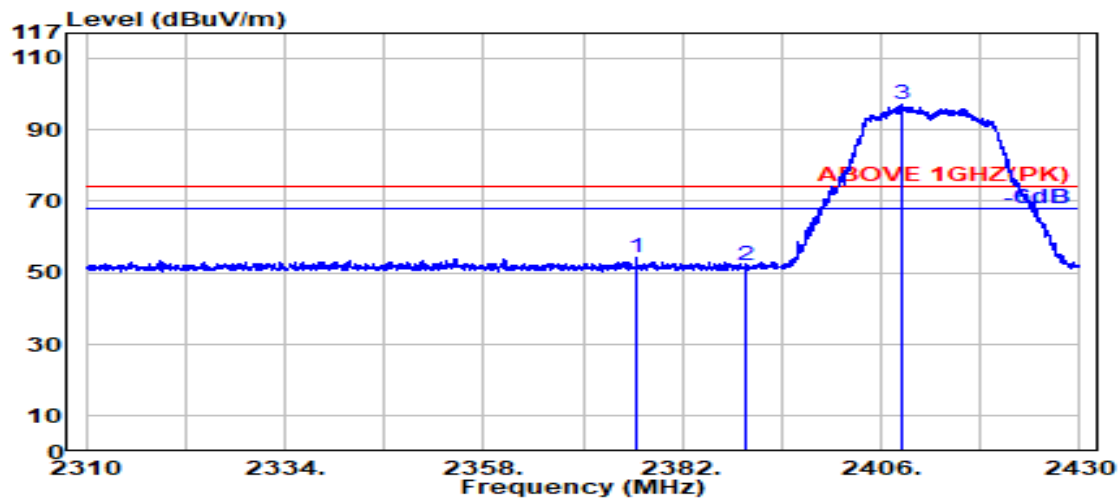

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.550	28.29	6.02	34.50	54.42	54.22	74.00	19.78	Peak
2389.800	28.18	6.03	34.50	52.35	52.07	74.00	21.93	Peak
@ 2408.650	28.15	6.06	34.50	97.44	97.16	---	---	Peak

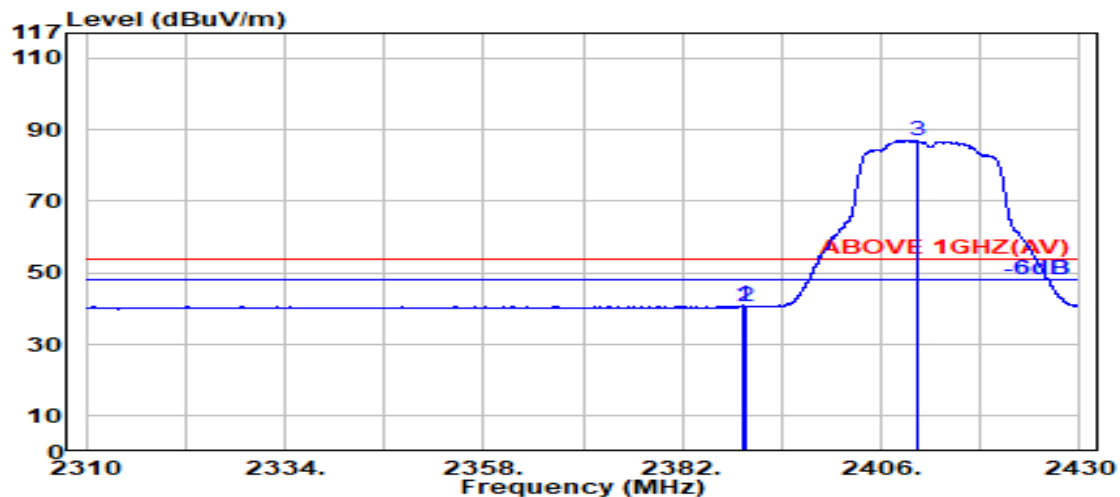

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.50	41.12	40.84	54.00	13.16	Average
2389.800	28.18	6.03	34.50	40.73	40.45	54.00	13.55	Average
@ 2410.350	28.16	6.06	34.50	87.32	87.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

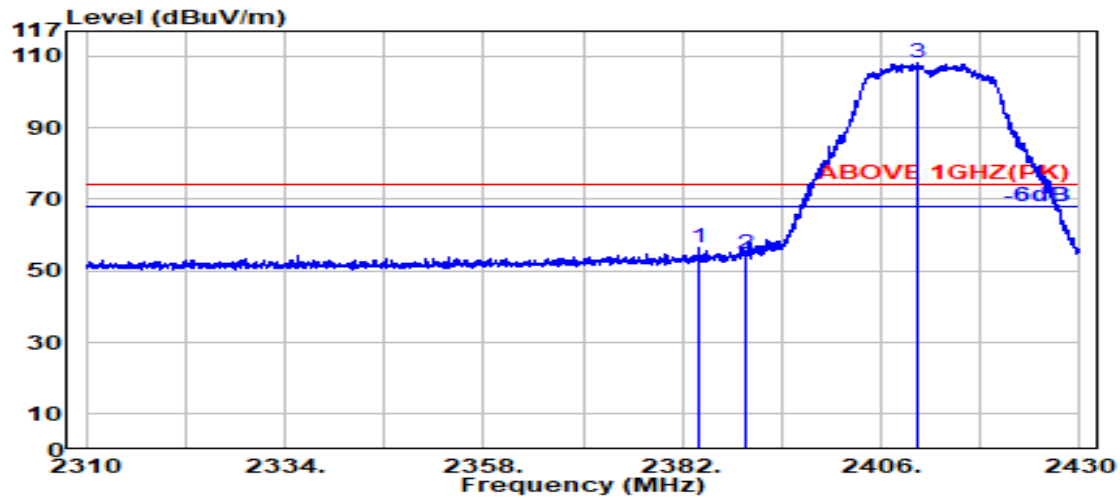

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.900	28.23	6.03	34.50	56.69	56.45	74.00	17.55	Peak
2389.800	28.18	6.03	34.50	54.89	54.61	74.00	19.39	Peak
@ 2410.500	28.16	6.06	34.50	108.43	108.15	---	---	Peak

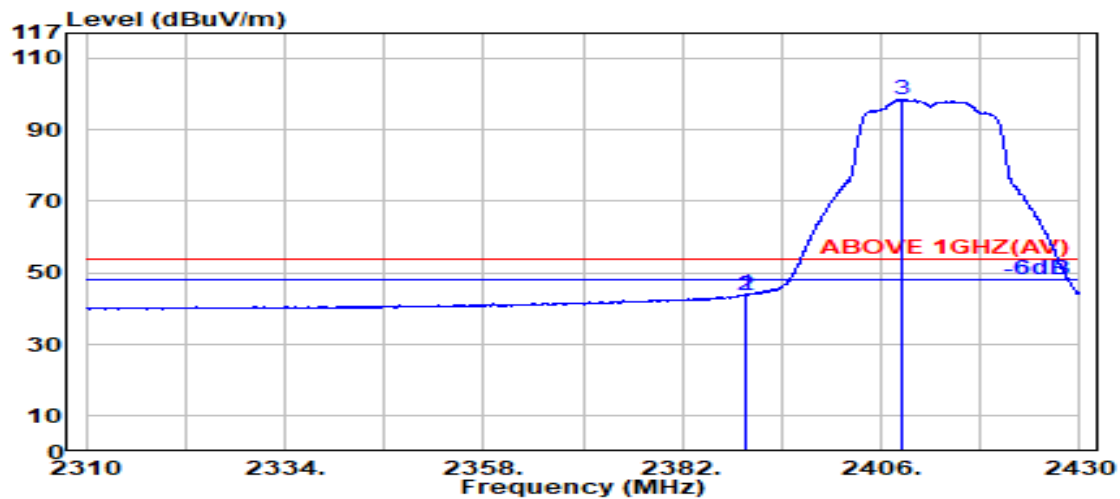

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	44.29	44.00	54.00	10.00	Average
2389.800	28.18	6.03	34.50	44.19	43.91	54.00	10.09	Average
@ 2408.450	28.15	6.06	34.50	98.71	98.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

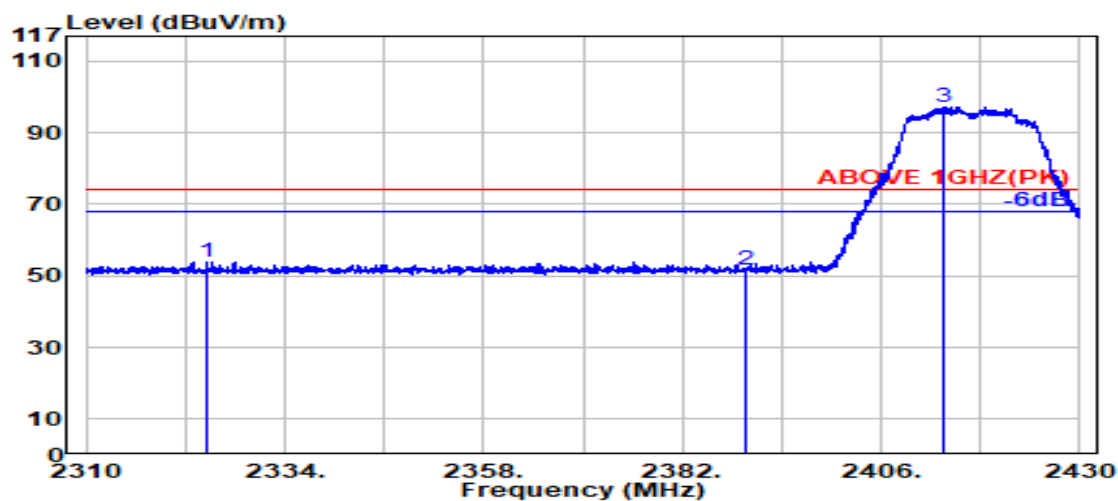

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2324.550	28.30	5.94	34.48	54.27	54.02	74.00	19.98	Peak
2389.800	28.18	6.03	34.50	52.16	51.87	74.00	22.13	Peak
@ 2413.500	28.18	6.07	34.50	97.48	97.23	---	---	Peak

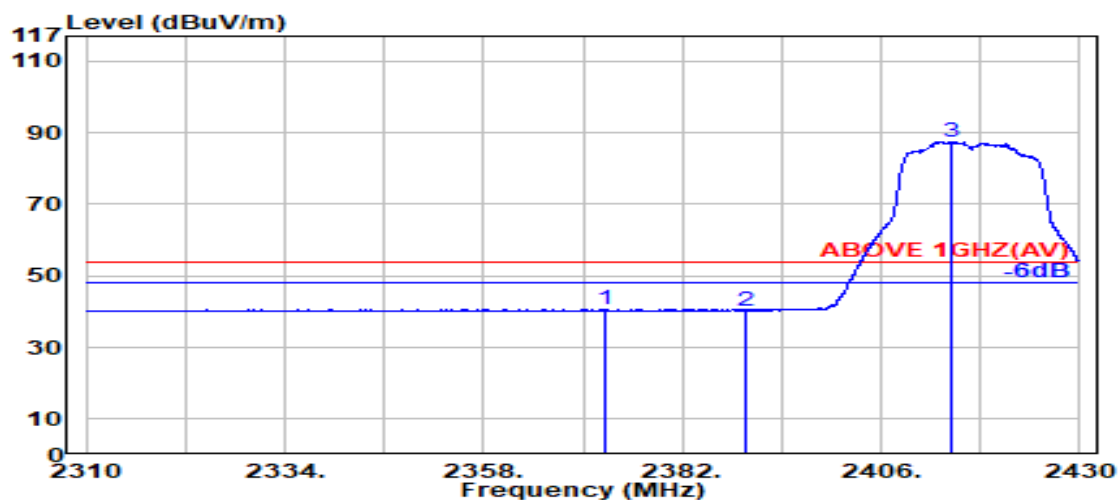

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.800	28.32	6.01	34.49	40.88	40.71	54.00	13.29	Average
2389.800	28.18	6.03	34.50	40.68	40.39	54.00	13.61	Average
@ 2414.350	28.19	6.07	34.50	87.78	87.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240538

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

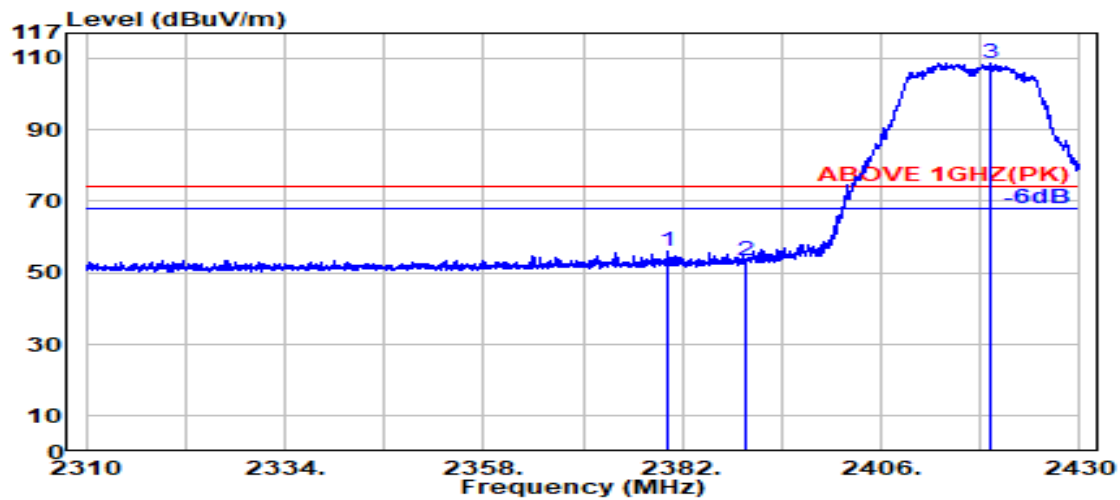

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.200	28.26	6.02	34.50	56.42	56.21	74.00	17.79	Peak
2389.800	28.18	6.03	34.50	53.81	53.53	74.00	20.47	Peak
@ 2419.200	28.22	6.08	34.50	109.02	108.80	---	---	Peak

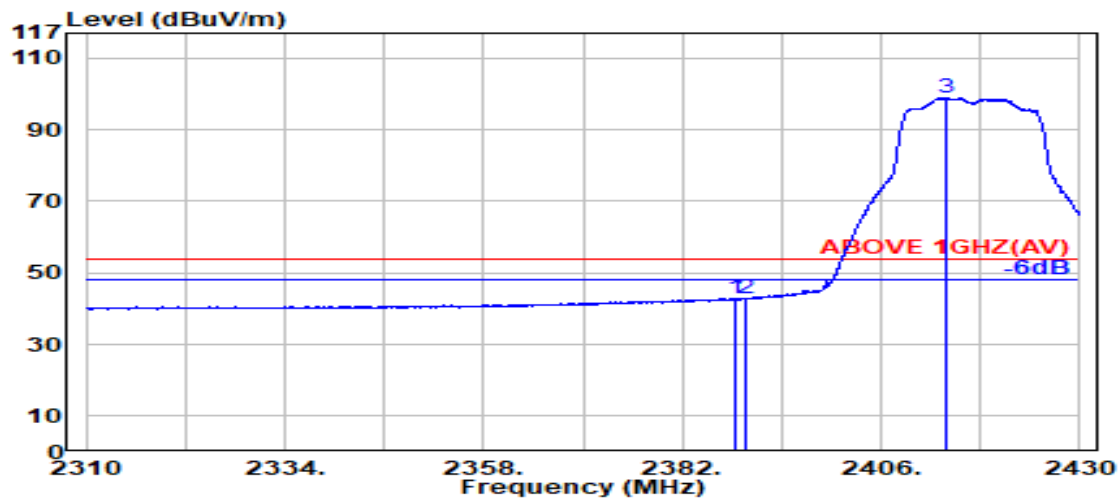

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.250	28.19	6.03	34.50	43.29	43.02	54.00	10.98	Average
2389.800	28.18	6.03	34.50	43.05	42.76	54.00	11.24	Average
@ 2413.750	28.18	6.07	34.50	99.16	98.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240538

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

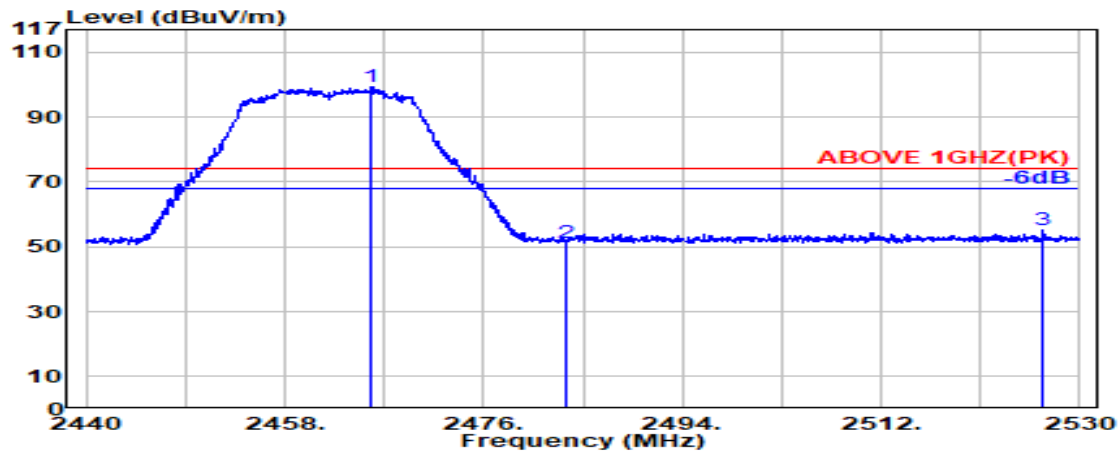

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.900	28.43	6.14	34.51	99.38	99.44	---	---	Peak
	2483.500	28.47	6.17	34.52	51.19	51.31	74.00	22.69	Peak
	2526.550	28.66	6.22	34.53	55.05	55.41	74.00	18.59	Peak

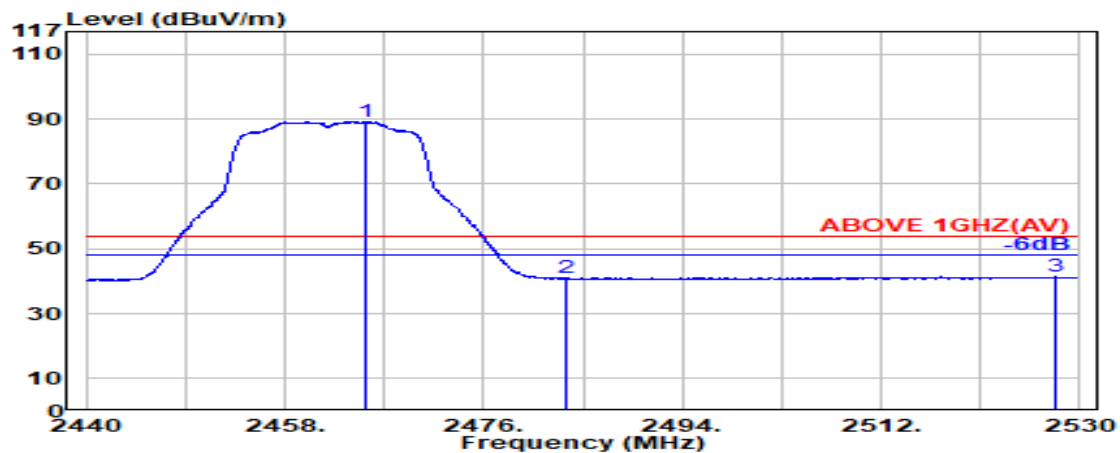

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.300	28.43	6.14	34.51	89.18	89.24	---	---	Average
	2483.500	28.47	6.17	34.52	40.80	40.92	54.00	13.08	Average
	2527.800	28.67	6.22	34.53	41.10	41.46	54.00	12.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

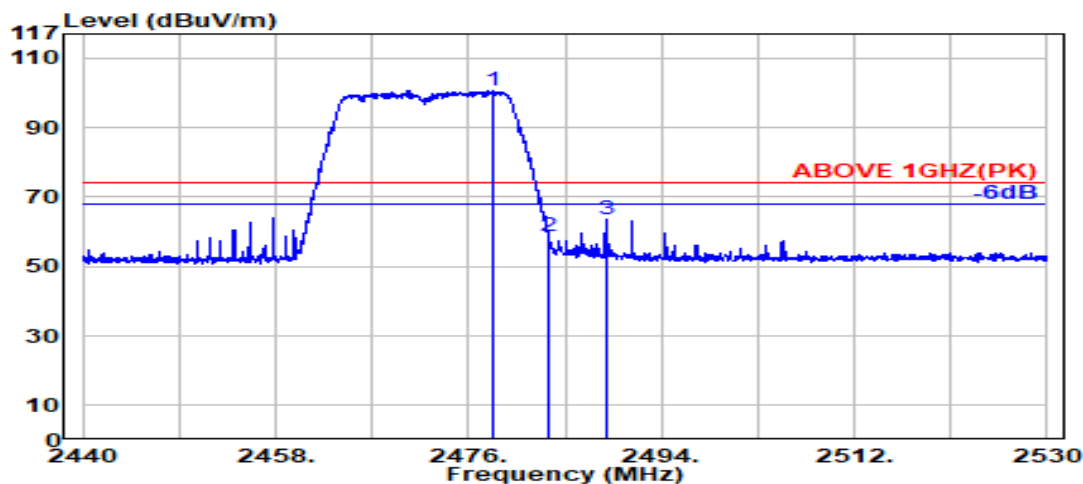

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	28.42	6.13	34.51	107.92	107.96	---	---	Peak
2483.500	28.47	6.17	34.52	54.31	54.43	74.00	19.57	Peak
2484.150	28.47	6.17	34.52	58.65	58.77	74.00	15.23	Peak

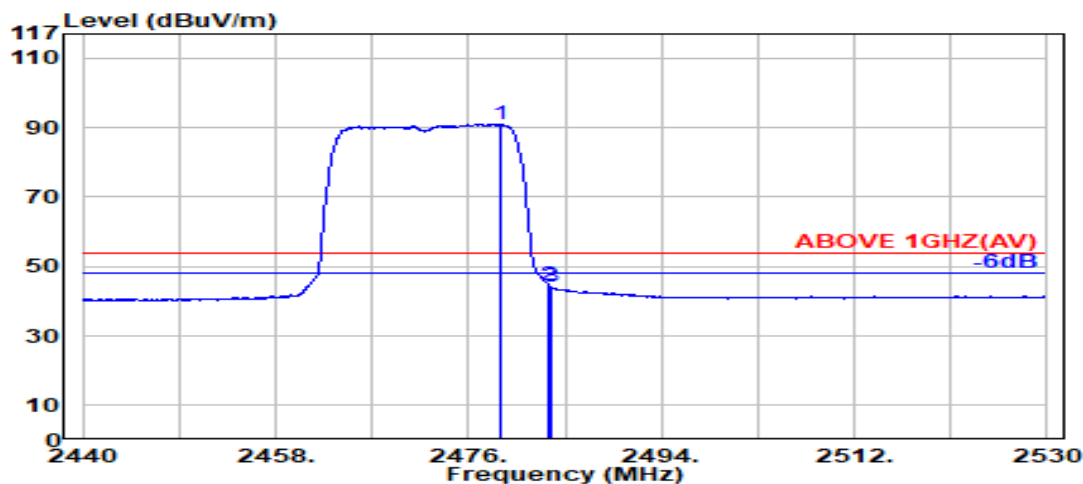

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	98.12	98.18	---	---	Average
2483.500	28.47	6.17	34.52	43.66	43.78	54.00	10.22	Average
2483.750	28.47	6.17	34.52	43.56	43.68	54.00	10.32	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

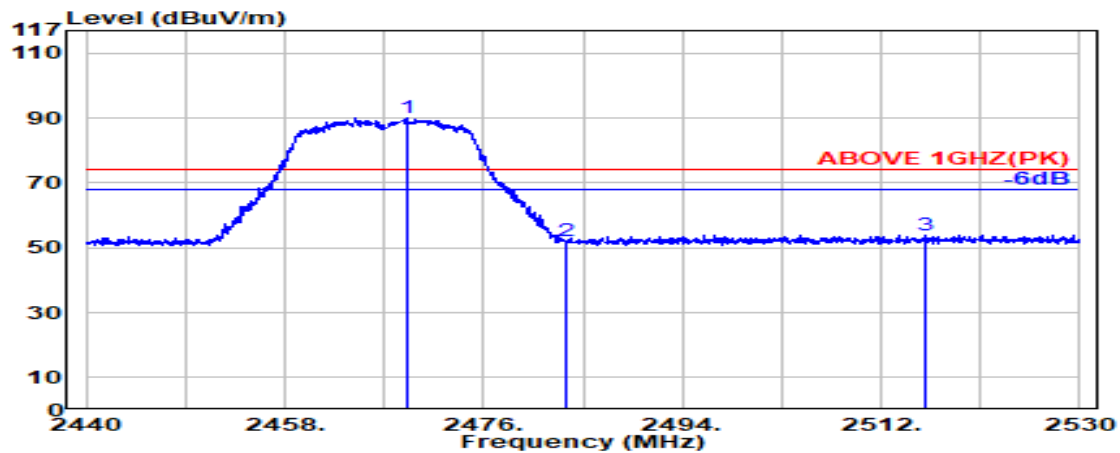

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	28.44	6.15	34.51	89.98	90.05	---	---	Peak
2483.500	28.47	6.17	34.52	51.86	51.98	74.00	22.02	Peak
2516.100	28.60	6.21	34.52	53.70	53.98	74.00	20.02	Peak

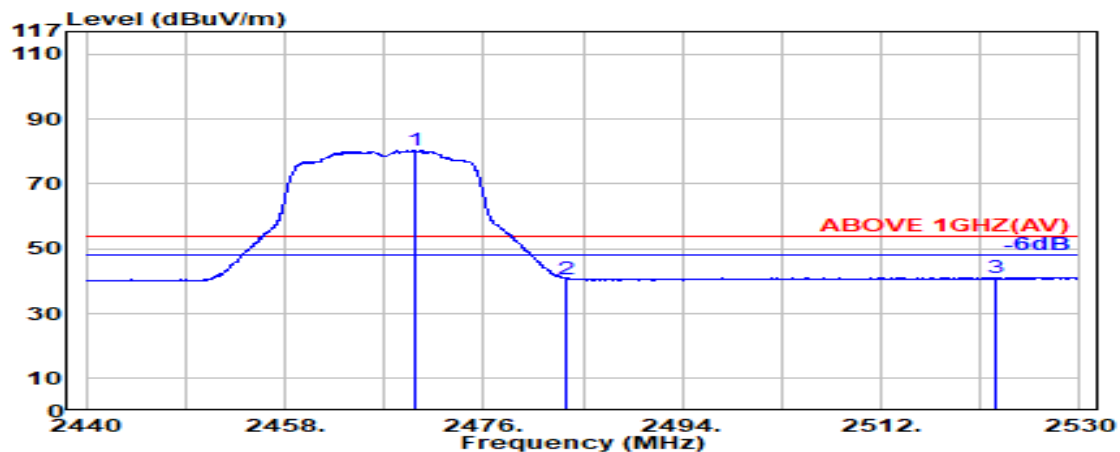

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.700	28.44	6.15	34.51	80.23	80.30	---	---	Average
2483.500	28.47	6.17	34.52	40.71	40.83	54.00	13.17	Average
2522.400	28.64	6.22	34.52	40.83	41.16	54.00	12.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

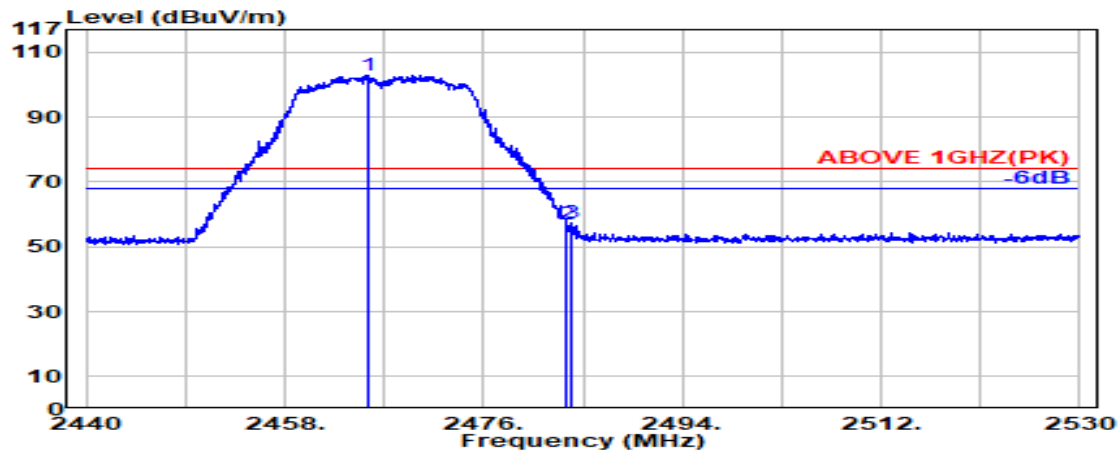

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	6.14	34.51	103.03	103.09	---	---	Peak
2483.500	28.47	6.17	34.52	56.66	56.78	74.00	17.22	Peak
2483.950	28.47	6.17	34.52	57.36	57.48	74.00	16.52	Peak

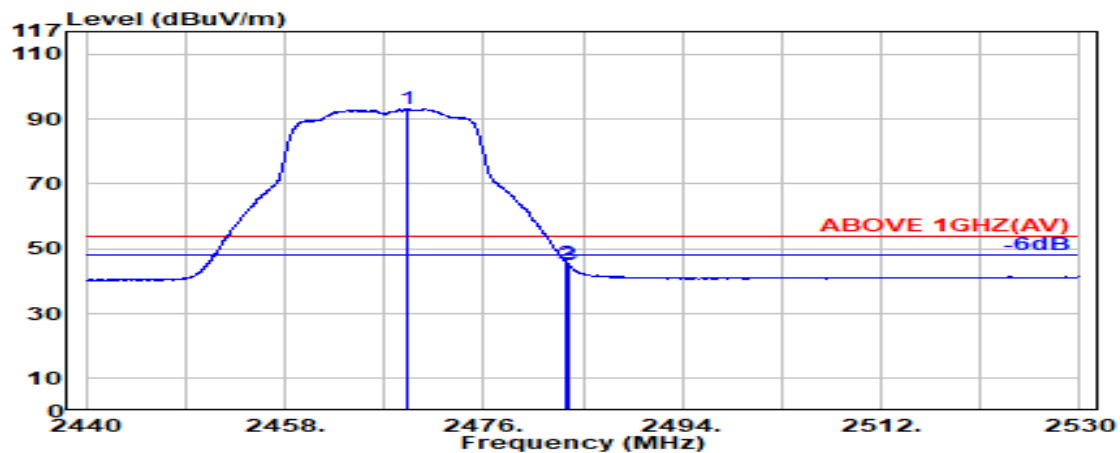

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	28.44	6.15	34.51	93.15	93.22	---	---	Average
2483.500	28.47	6.17	34.52	45.16	45.28	54.00	8.72	Average
2483.750	28.47	6.17	34.52	44.74	44.86	54.00	9.14	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

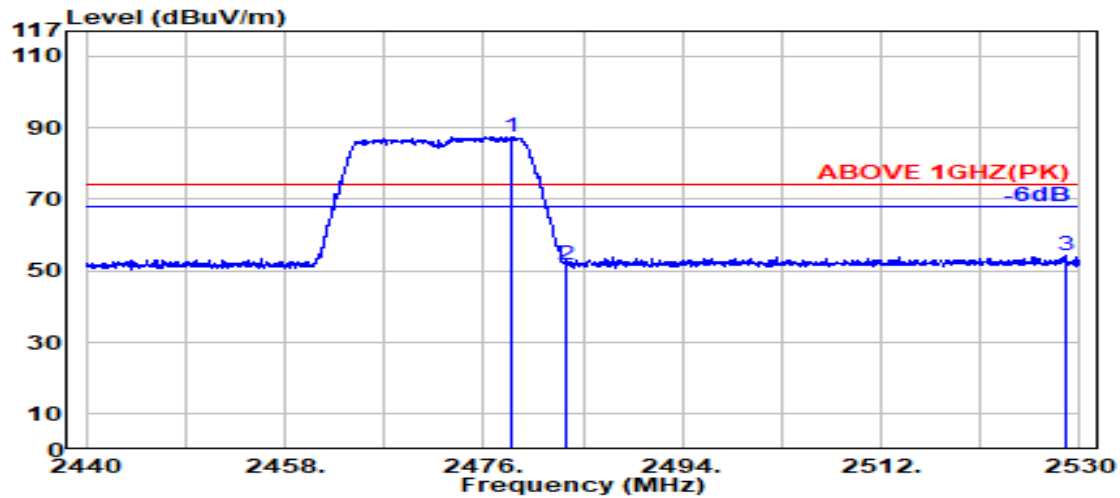

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.46	6.16	34.52	87.33	87.44	---	---	Peak
2483.500	28.47	6.17	34.52	51.50	51.62	74.00	22.38	Peak
2528.700	28.67	6.22	34.53	53.84	54.21	74.00	19.79	Peak

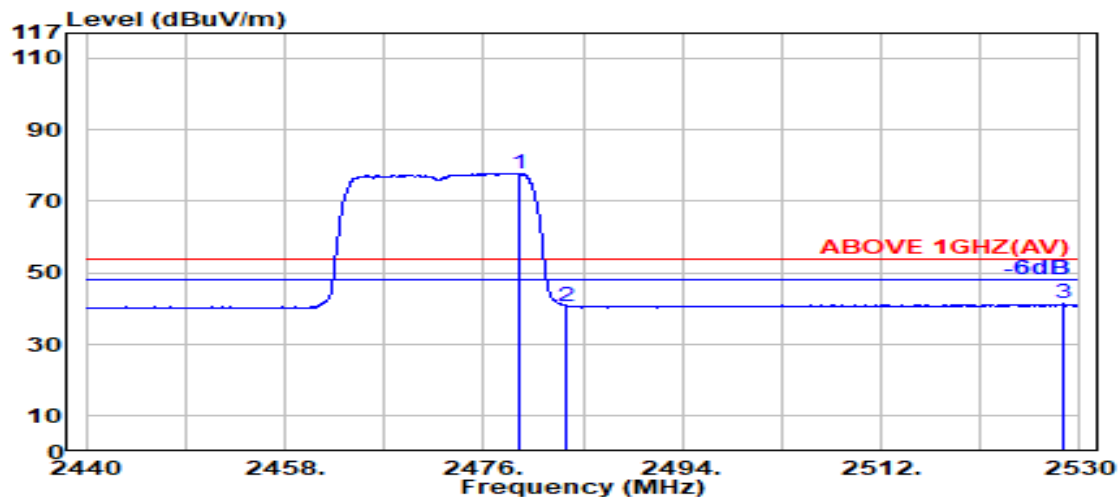

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	6.16	34.52	77.77	77.88	---	---	Average
2483.500	28.47	6.17	34.52	40.62	40.73	54.00	13.27	Average
2528.600	28.67	6.22	34.53	40.91	41.28	54.00	12.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

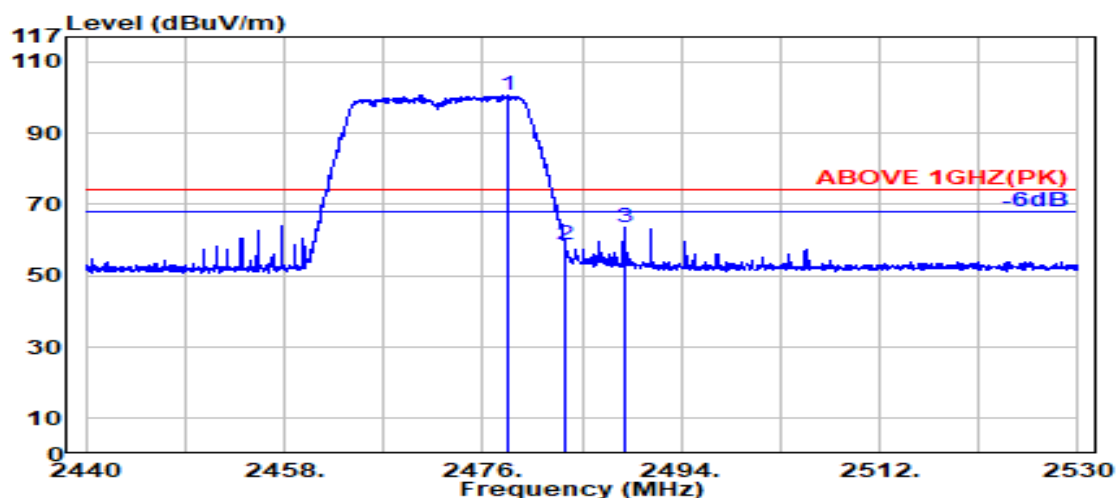

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.200	28.46	6.16	34.52	100.78	100.88	---	---	Peak
2483.500	28.47	6.17	34.52	58.77	58.89	74.00	15.11	Peak
2488.800	28.48	6.17	34.52	63.47	63.61	74.00	10.39	Peak

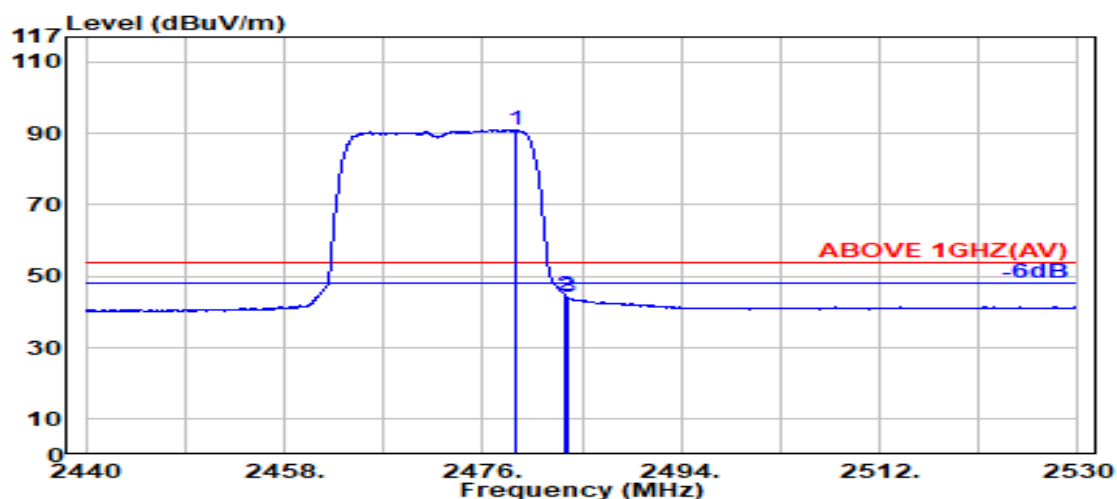

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.900	28.46	6.16	34.52	90.91	91.02	---	---	Average
2483.500	28.47	6.17	34.52	44.66	44.78	54.00	9.22	Average
2483.700	28.47	6.17	34.52	44.05	44.17	54.00	9.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240538


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

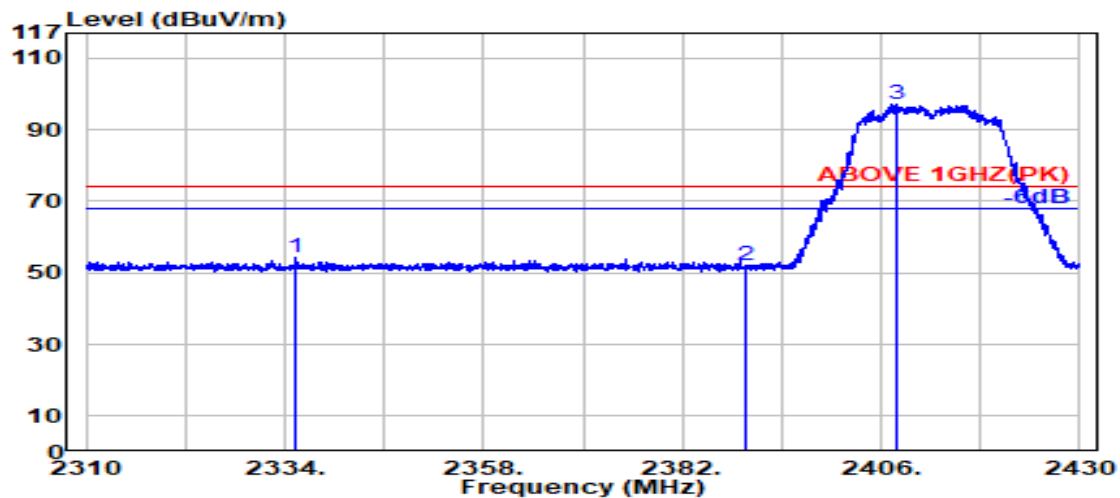

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2335.400	28.38	5.95	34.49	54.29	54.14	74.00	19.86	Peak
2389.800	28.18	6.03	34.50	52.39	52.11	74.00	21.89	Peak
@ 2407.950	28.15	6.06	34.50	97.47	97.18	---	---	Peak

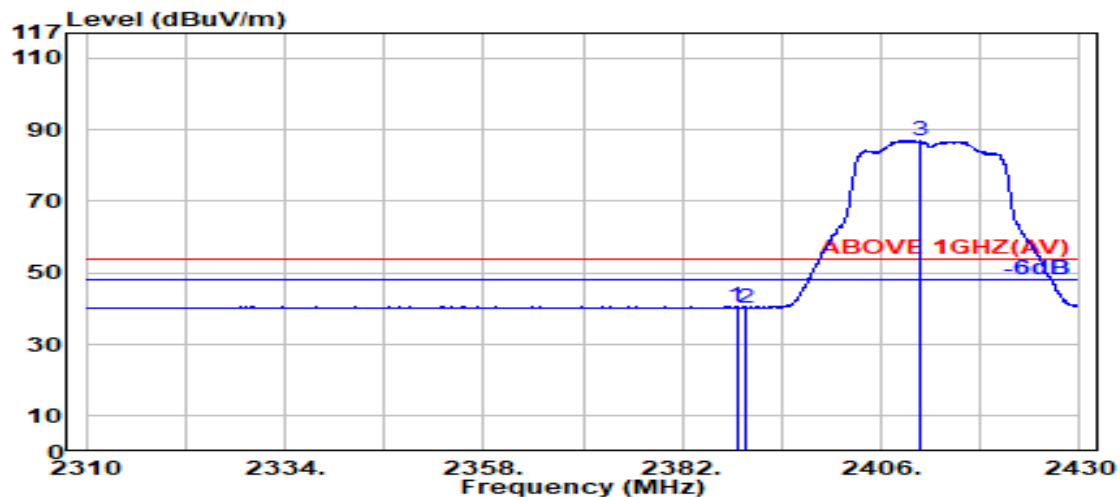


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.19	6.03	34.50	40.90	40.63	54.00	13.37	Average
2389.800	28.18	6.03	34.50	40.64	40.36	54.00	13.64	Average
@ 2410.700	28.16	6.06	34.50	87.37	87.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

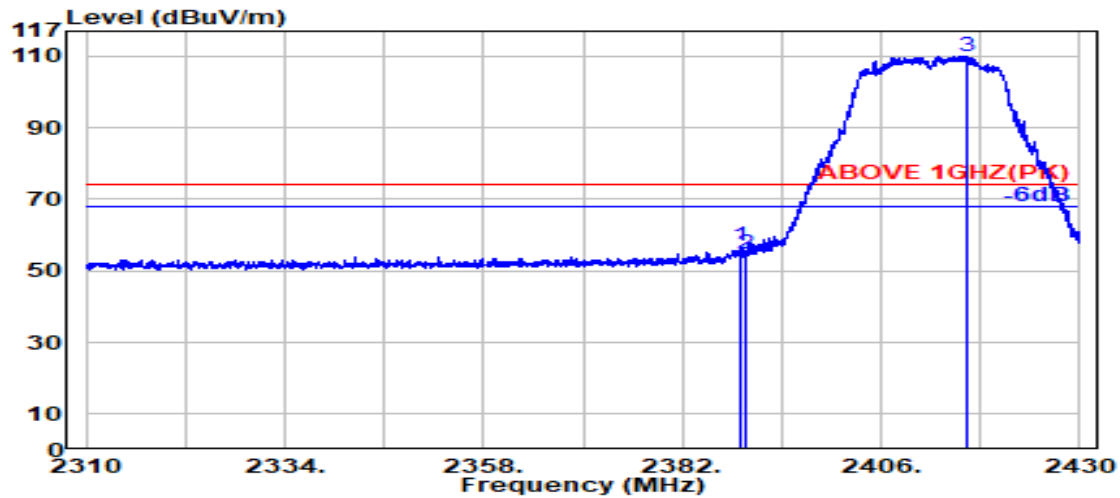

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.19	6.03	34.50	57.19	56.91	74.00	17.09	Peak
2389.800	28.18	6.03	34.50	54.95	54.67	74.00	19.33	Peak
@ 2416.400	28.20	6.07	34.50	110.33	110.10	---	---	Peak

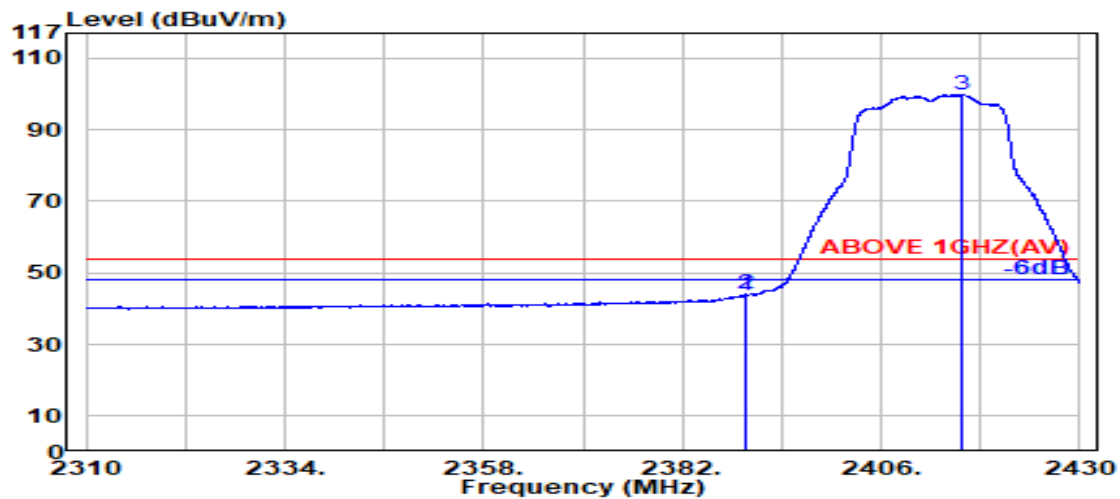

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	44.03	43.75	54.00	10.25	Average
2389.800	28.18	6.03	34.50	44.29	44.01	54.00	9.99	Average
@ 2415.850	28.20	6.07	34.50	100.22	99.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

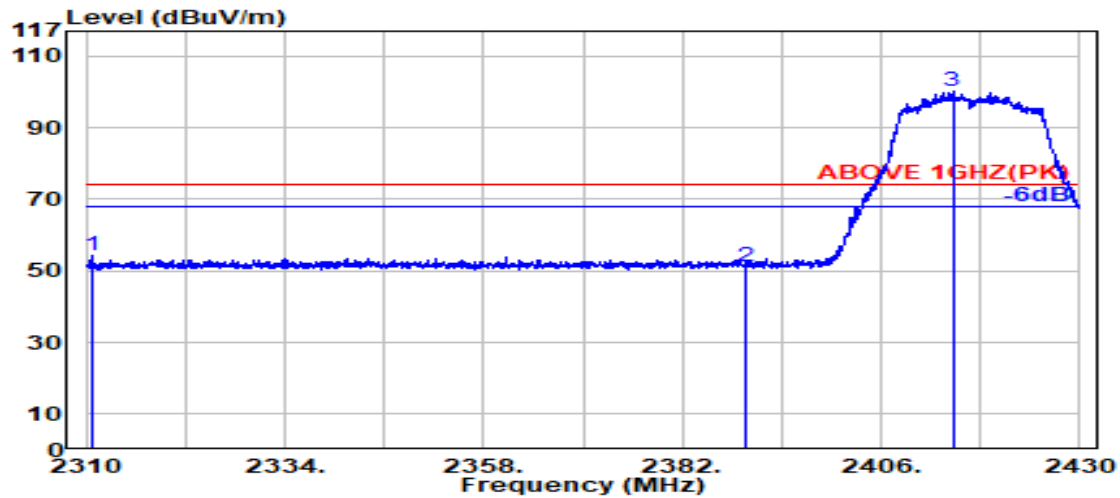

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2310.600	28.19	5.92	34.48	54.68	54.31	74.00	19.69	Peak
2389.800	28.18	6.03	34.50	51.61	51.33	74.00	22.67	Peak
@ 2414.650	28.19	6.07	34.50	100.41	100.16	---	---	Peak

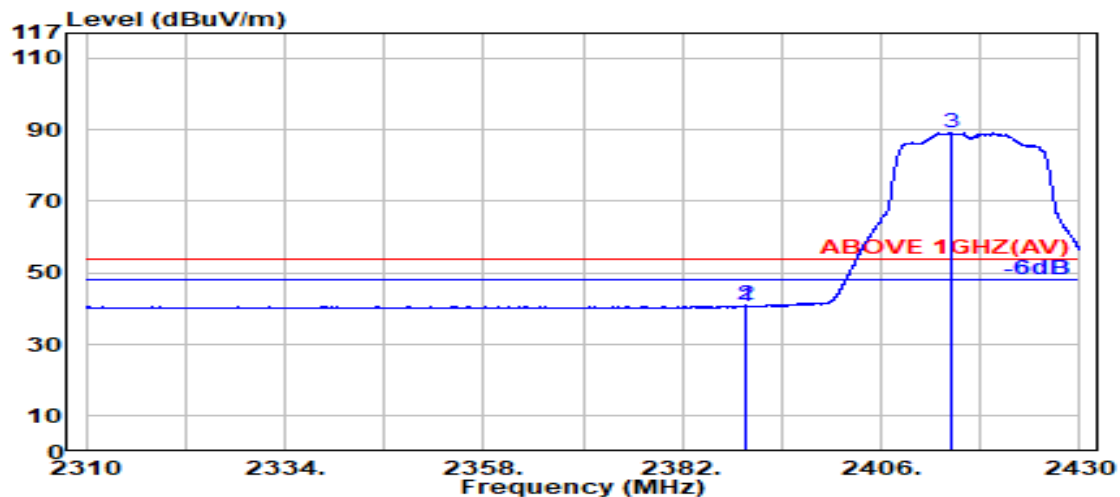

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	41.02	40.74	54.00	13.26	Average
2389.800	28.18	6.03	34.50	41.13	40.85	54.00	13.15	Average
@ 2414.350	28.19	6.07	34.50	89.37	89.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

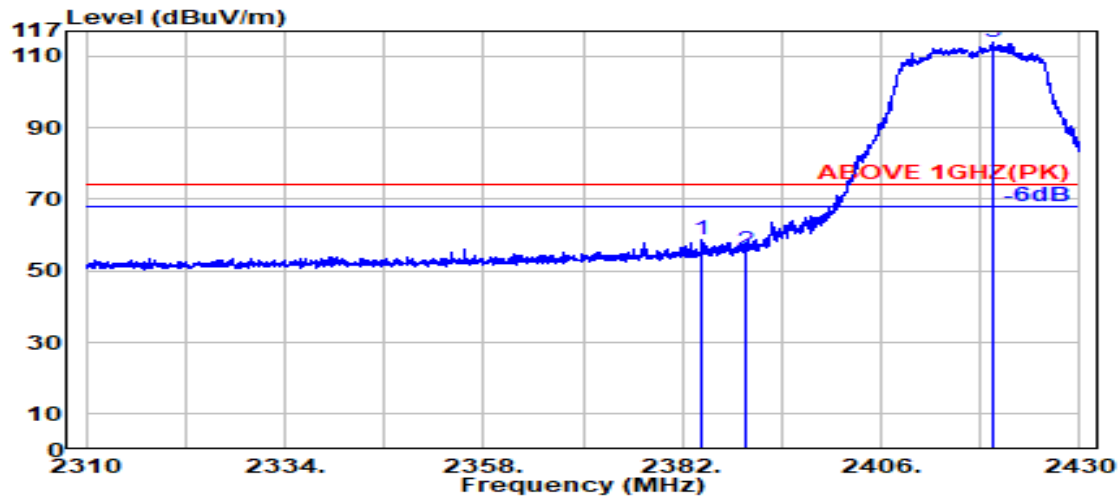

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.400	28.22	6.03	34.50	59.03	58.78	74.00	15.22	Peak
2389.800	28.18	6.03	34.50	55.94	55.66	74.00	18.34	Peak
@ 2419.500	28.22	6.08	34.50	114.33	114.12	---	---	Peak

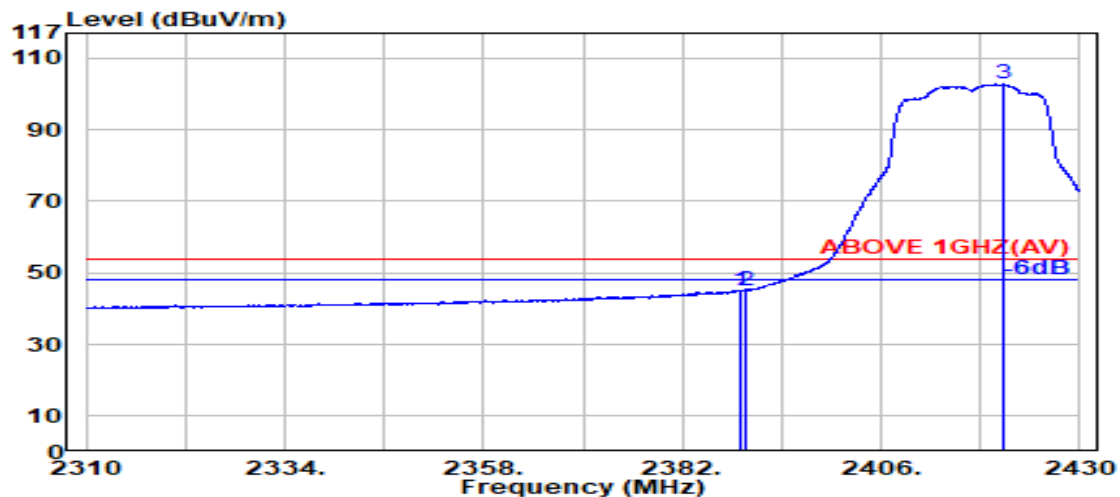

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.50	45.49	45.22	54.00	8.78	Average
2389.800	28.18	6.03	34.50	45.33	45.04	54.00	8.96	Average
@ 2420.800	28.23	6.08	34.50	103.02	102.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

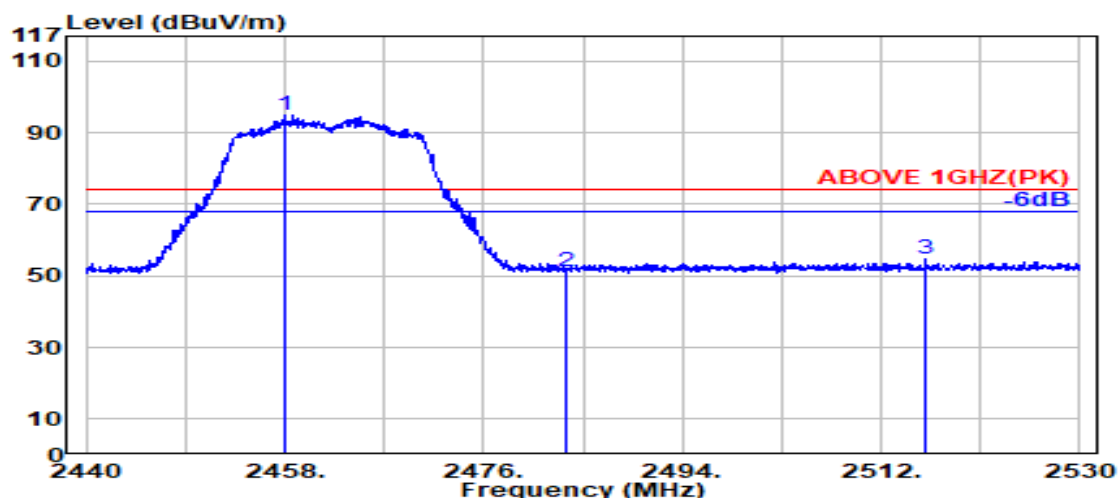

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.050	28.42	6.13	34.51	95.09	95.12	---	---	Peak
2483.500	28.47	6.17	34.52	51.02	51.14	74.00	22.86	Peak
2516.000	28.60	6.21	34.52	54.37	54.65	74.00	19.35	Peak

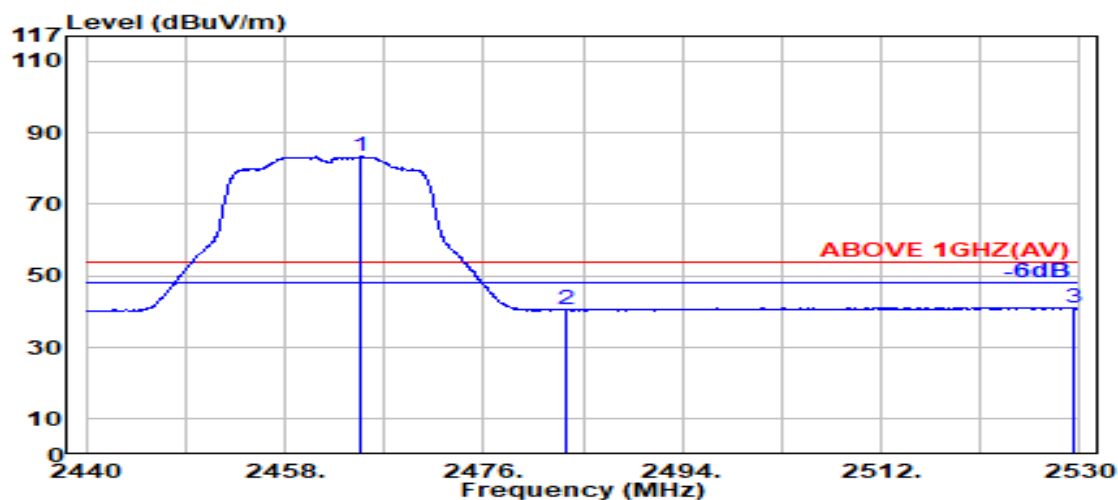

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.850	28.43	6.14	34.51	83.30	83.35	---	---	Average
2483.500	28.47	6.17	34.52	40.35	40.47	54.00	13.53	Average
2529.500	28.68	6.22	34.53	40.78	41.15	54.00	12.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240538

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

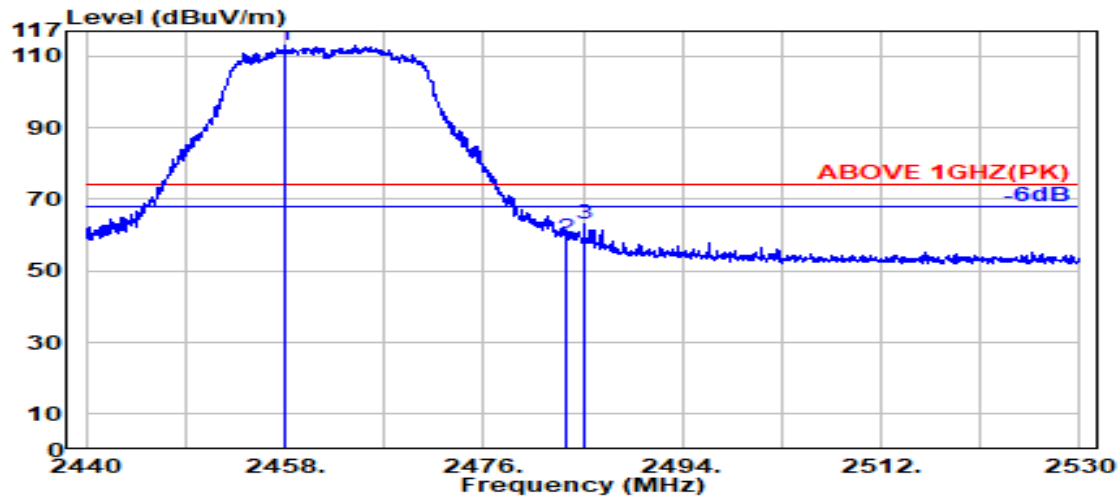

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.42	6.13	34.51	113.13	113.17	---	---	Peak
2483.500	28.47	6.17	34.52	58.96	59.08	74.00	14.92	Peak
2485.150	28.47	6.17	34.52	63.15	63.27	74.00	10.73	Peak

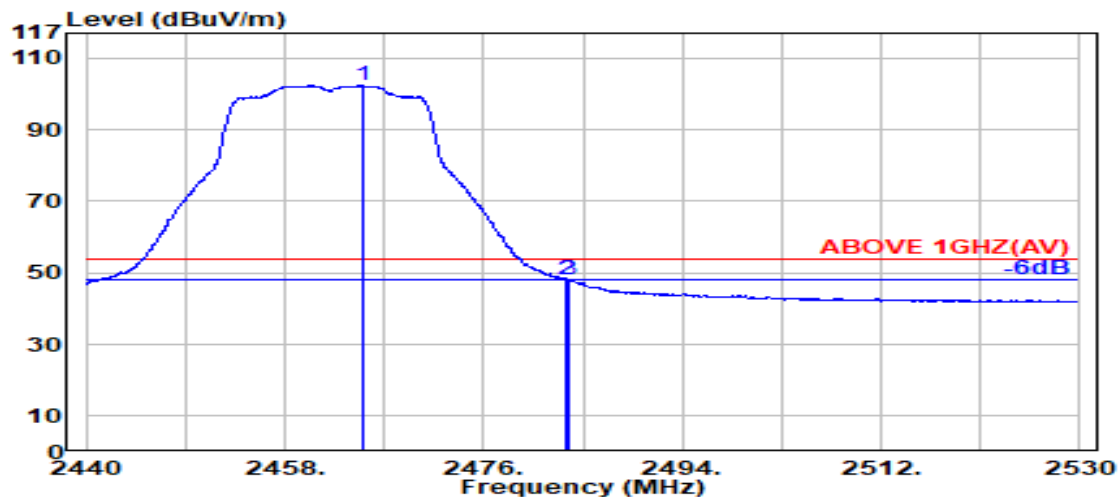

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.050	28.43	6.14	34.51	102.21	102.27	---	---	Average
2483.500	28.47	6.17	34.52	47.91	48.03	54.00	5.97	Average
2483.700	28.47	6.17	34.52	47.89	48.01	54.00	5.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

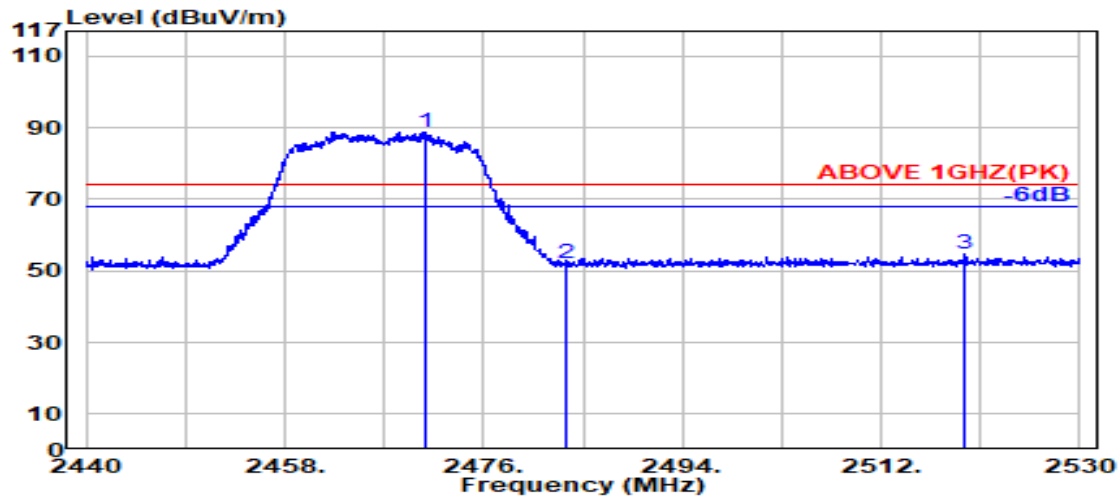

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.700	28.44	6.15	34.51	88.86	88.93	---	---	Peak
2483.500	28.47	6.17	34.52	52.02	52.13	74.00	21.87	Peak
2519.500	28.62	6.21	34.52	54.49	54.80	74.00	19.20	Peak

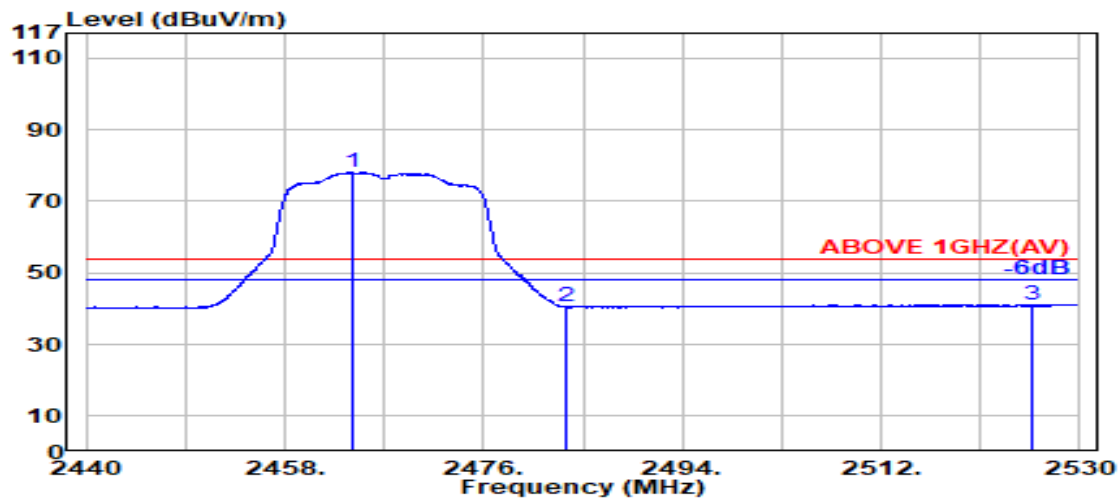


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.150	28.43	6.14	34.51	78.04	78.10	---	---	Average
2483.500	28.47	6.17	34.52	40.44	40.55	54.00	13.45	Average
2525.600	28.65	6.22	34.53	40.83	41.18	54.00	12.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

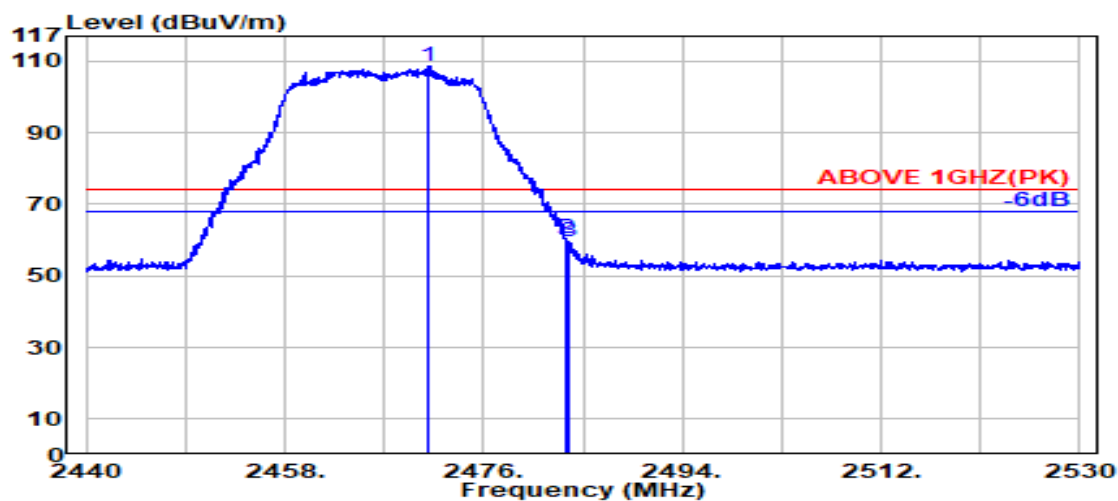

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.050	28.44	6.15	34.51	108.34	108.42	---	---	Peak
2483.500	28.47	6.17	34.52	60.17	60.29	74.00	13.71	Peak
2483.750	28.47	6.17	34.52	59.47	59.59	74.00	14.41	Peak

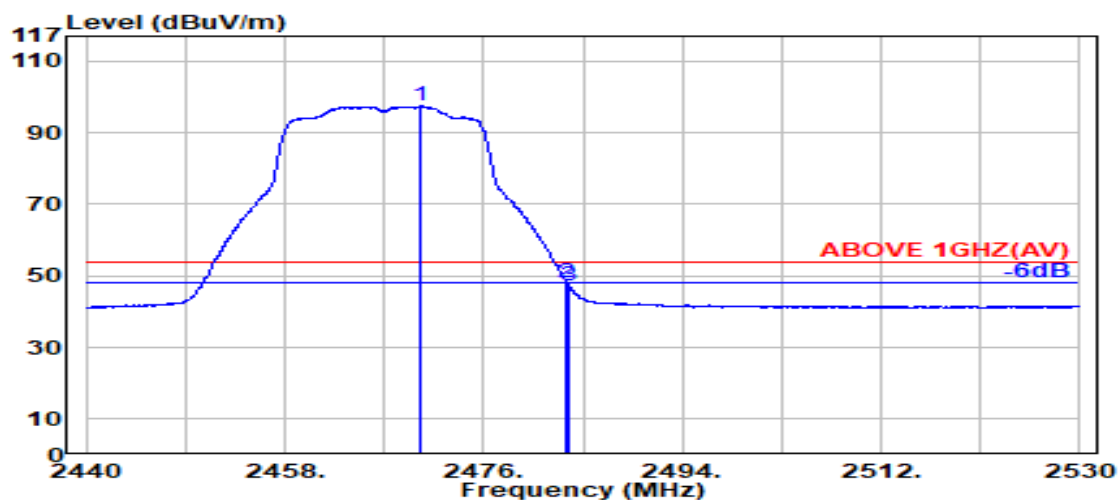

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.350	28.44	6.15	34.51	97.39	97.46	---	---	Average
2483.500	28.47	6.17	34.52	48.10	48.22	54.00	5.78	Average
2483.700	28.47	6.17	34.52	47.26	47.38	54.00	6.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

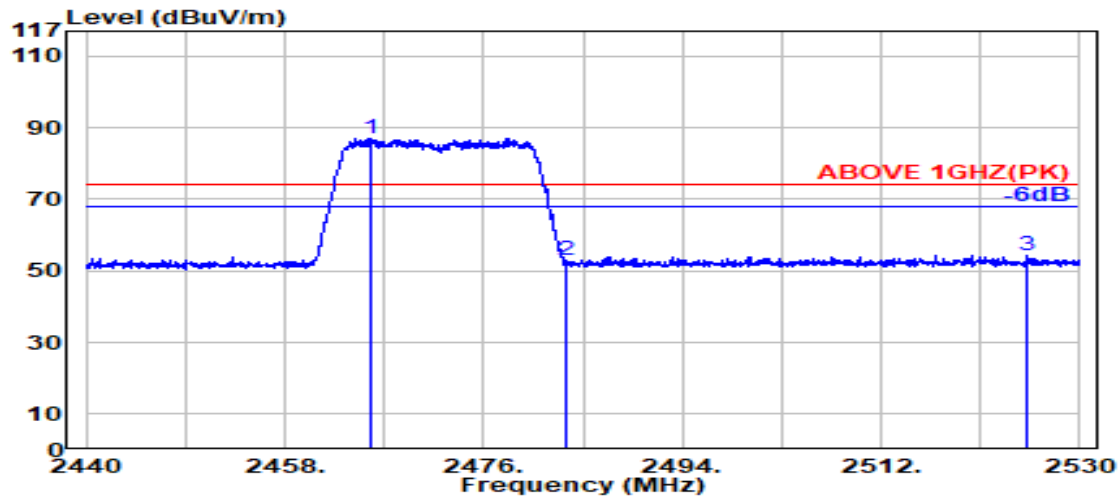

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.850	28.43	6.14	34.51	87.02	87.08	---	---	Peak
	2483.500	28.47	6.17	34.52	52.95	53.07	74.00	20.93	Peak
	2525.250	28.65	6.22	34.53	54.09	54.43	74.00	19.57	Peak

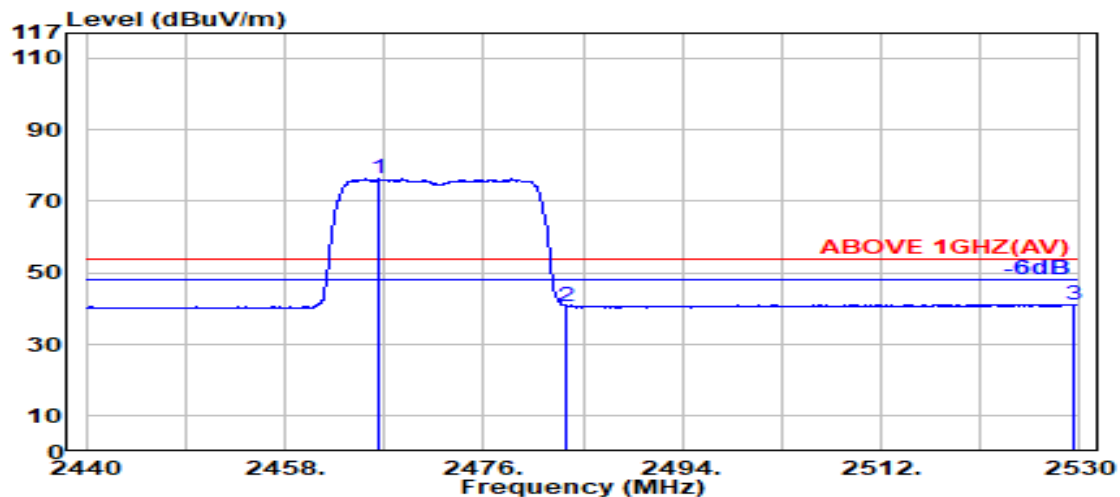


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.500	28.43	6.14	34.51	76.15	76.21	---	---	Average
	2483.500	28.47	6.17	34.52	40.48	40.60	54.00	13.40	Average
	2529.400	28.68	6.22	34.53	40.87	41.24	54.00	12.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

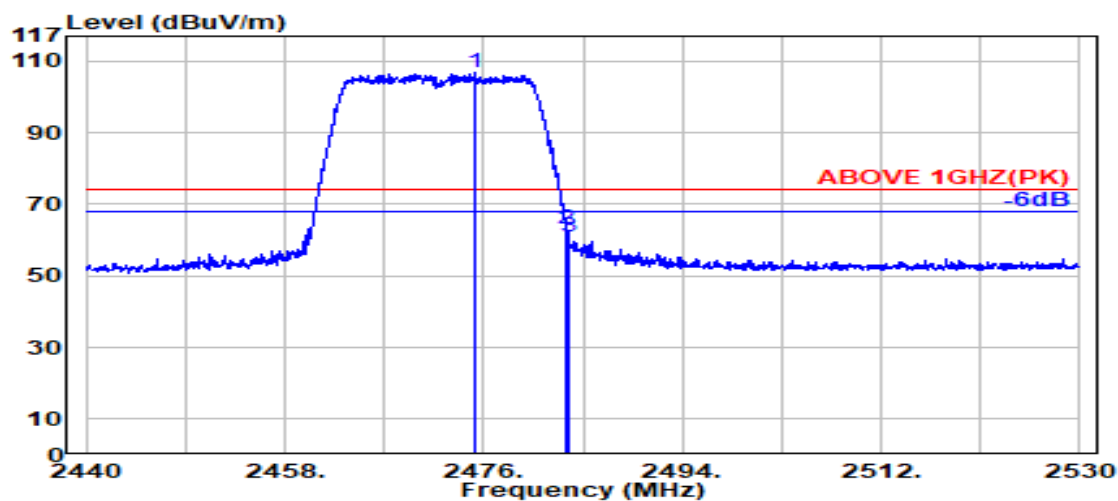

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.250	28.45	6.16	34.52	106.87	106.97	---	---	Peak
2483.500	28.47	6.17	34.52	63.02	63.14	74.00	10.86	Peak
2483.700	28.47	6.17	34.52	60.74	60.86	74.00	13.14	Peak

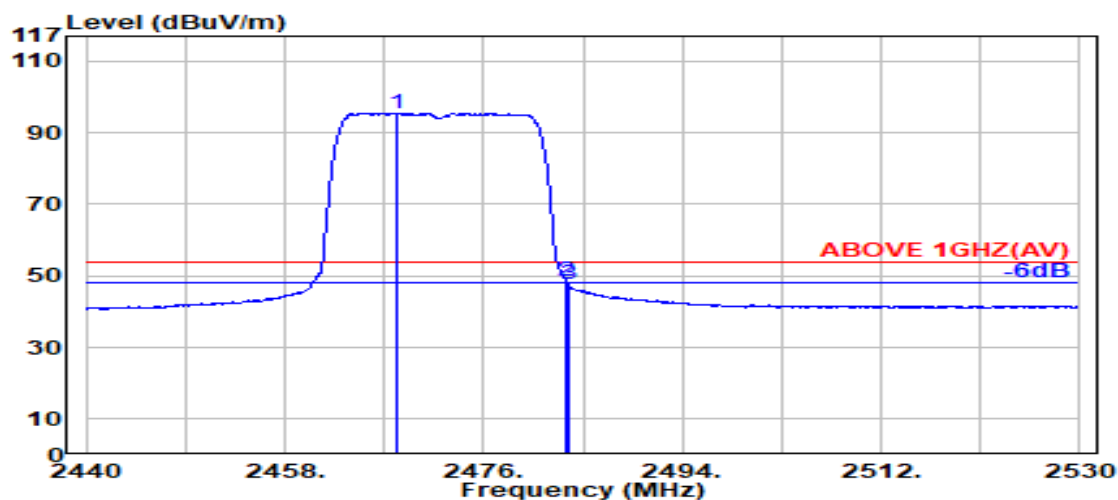


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.050	28.44	6.15	34.51	95.43	95.50	---	---	Average
2483.500	28.47	6.17	34.52	48.40	48.52	54.00	5.48	Average
2483.700	28.47	6.17	34.52	47.40	47.52	54.00	6.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

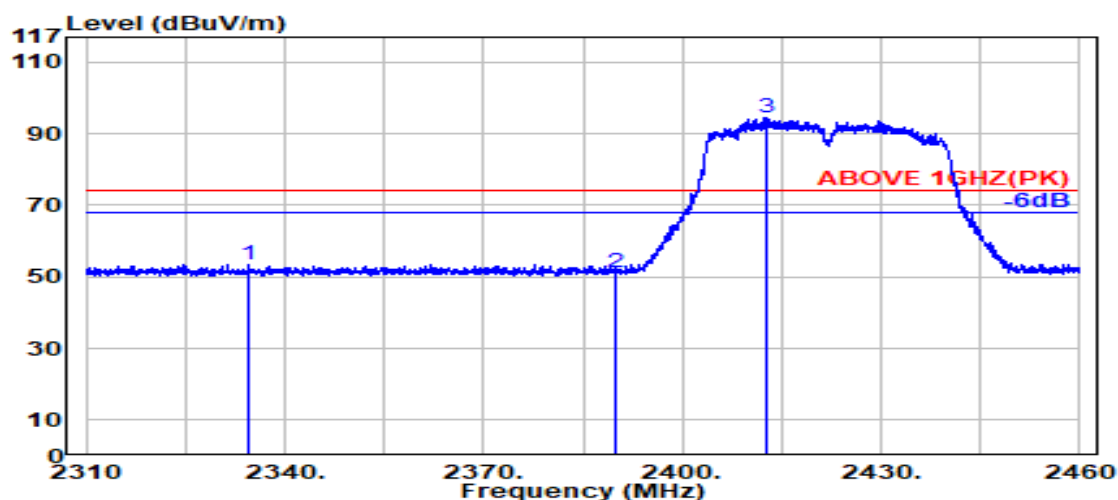

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2334.600	28.38	5.95	34.49	53.78	53.62	74.00	20.38	Peak
2389.800	28.18	6.03	34.50	51.69	51.41	74.00	22.59	Peak
@ 2412.700	28.18	6.07	34.50	94.71	94.45	---	---	Peak

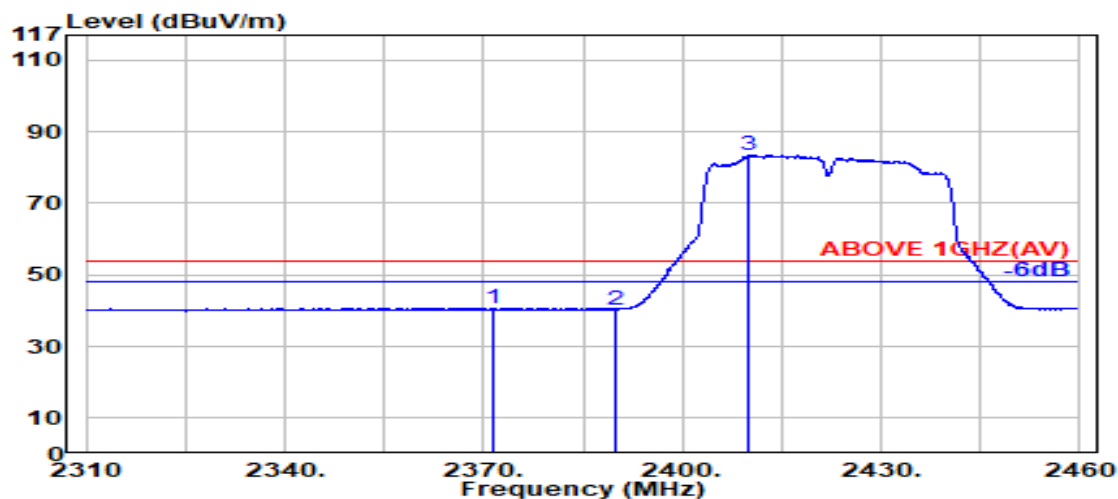

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2371.500	28.33	6.01	34.49	40.89	40.73	54.00	13.27	Average
2389.800	28.18	6.03	34.50	40.67	40.38	54.00	13.62	Average
@ 2409.900	28.16	6.06	34.50	83.70	83.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

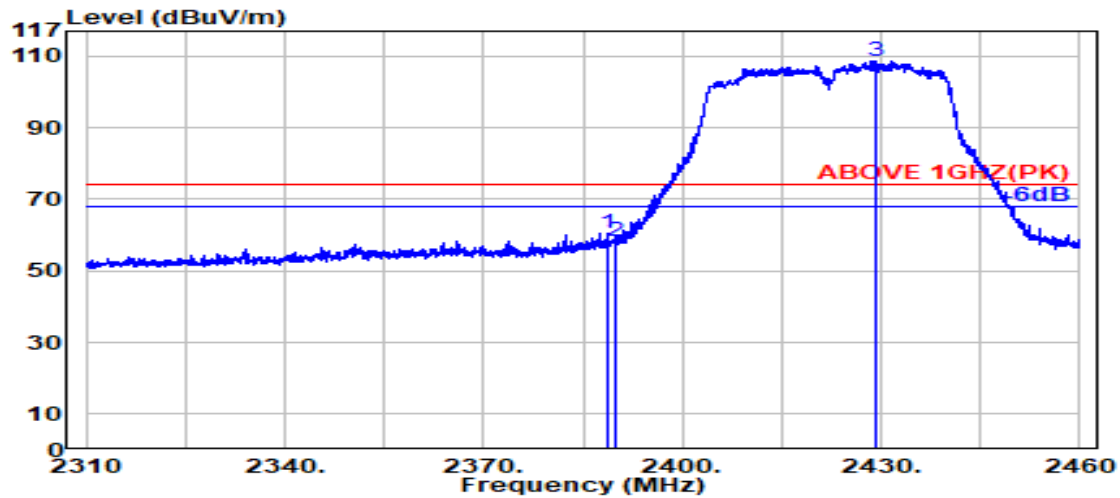

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.19	6.03	34.50	60.96	60.69	74.00	13.31	Peak
2389.800	28.18	6.03	34.50	58.55	58.27	74.00	15.73	Peak
@ 2429.300	28.28	6.09	34.51	108.65	108.52	---	---	Peak

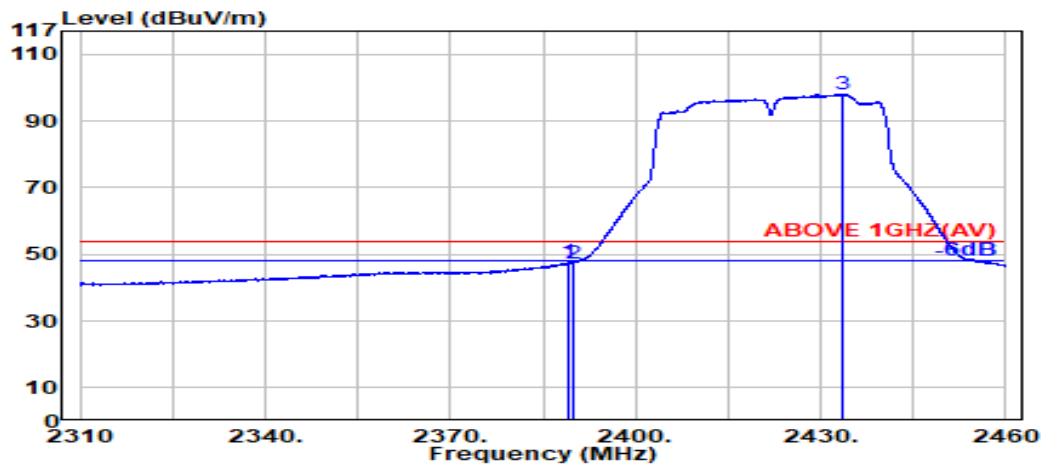

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	47.83	47.55	54.00	6.45	Average
2389.800	28.18	6.03	34.50	47.71	47.43	54.00	6.57	Average
@ 2433.700	28.30	6.10	34.51	98.15	98.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

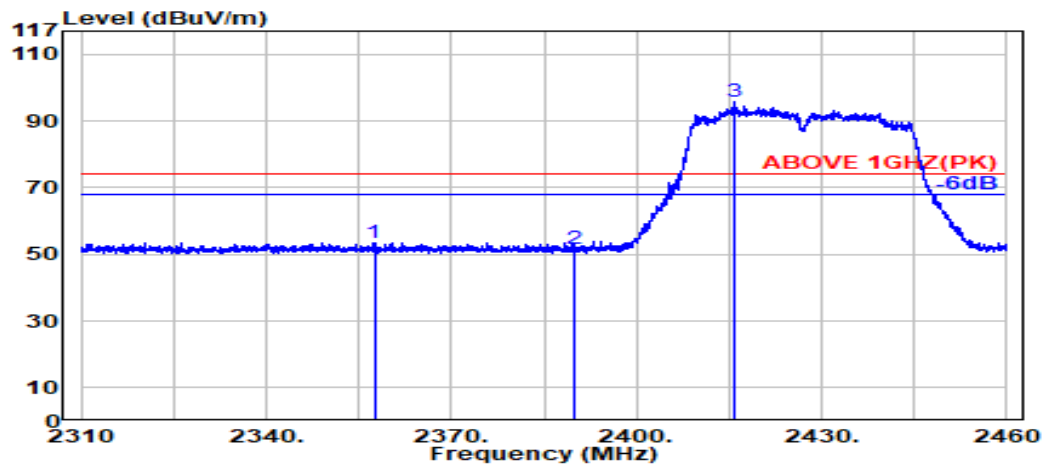

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2357.500	28.44	5.99	34.49	53.71	53.64	74.00	20.36	Peak
2389.800	28.18	6.03	34.50	52.06	51.78	74.00	22.22	Peak
@ 2416.000	28.20	6.07	34.50	95.94	95.71	---	---	Peak

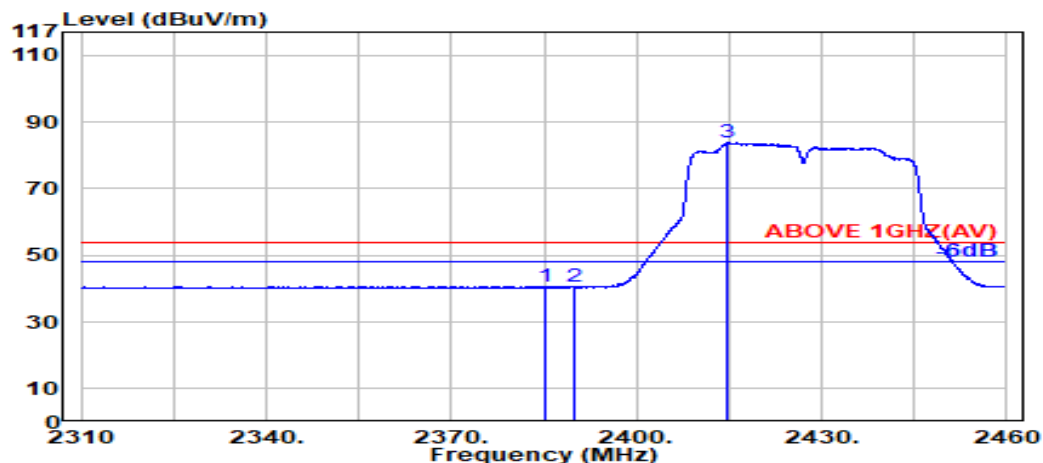

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.050	28.22	6.03	34.50	41.02	40.77	54.00	13.23	Average
2389.800	28.18	6.03	34.50	40.76	40.48	54.00	13.52	Average
@ 2414.700	28.19	6.07	34.50	84.20	83.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

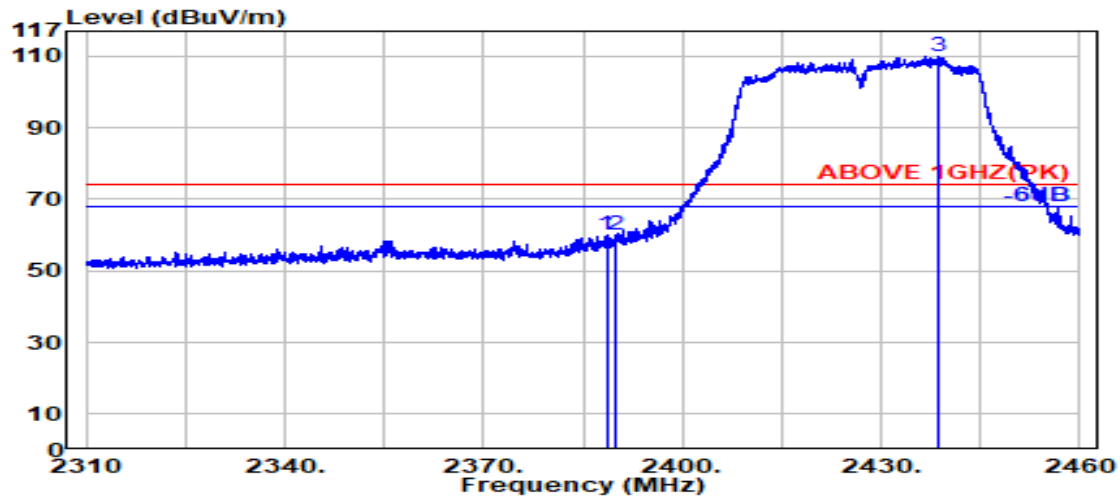

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.19	6.03	34.50	60.20	59.93	74.00	14.07	Peak
2389.800	28.18	6.03	34.50	60.14	59.86	74.00	14.14	Peak
@ 2438.550	28.33	6.10	34.51	110.01	109.93	---	---	Peak

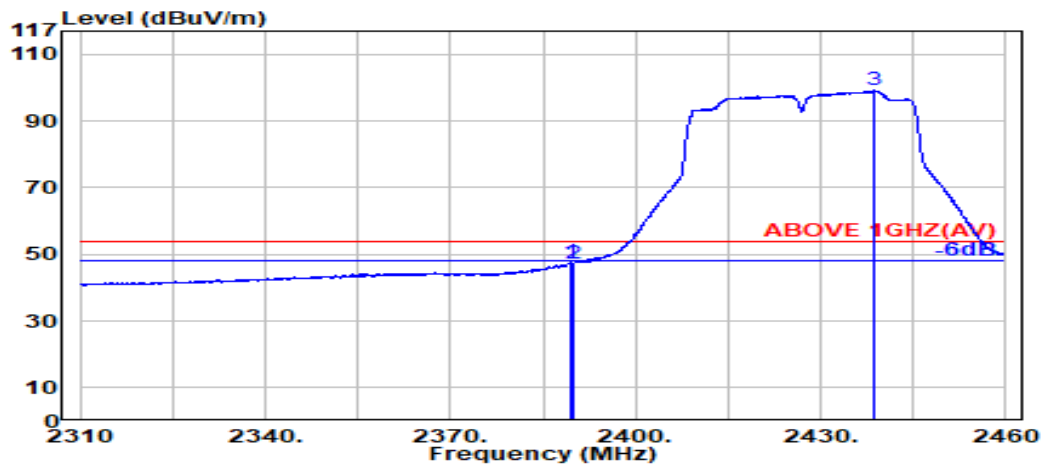


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	47.87	47.59	54.00	6.41	Average
2389.800	28.18	6.03	34.50	47.45	47.17	54.00	6.83	Average
@ 2438.550	28.33	6.10	34.51	99.22	99.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

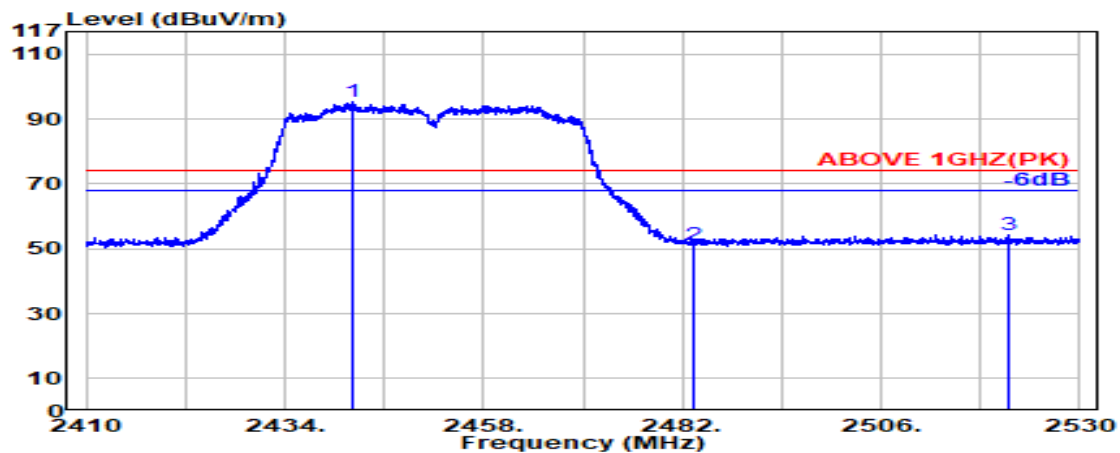

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2442.300	28.35	6.11	34.51	95.37	95.33	---	---	Peak
	2483.500	28.47	6.17	34.52	51.22	51.33	74.00	22.67	Peak
	2521.550	28.63	6.22	34.52	54.08	54.40	74.00	19.60	Peak

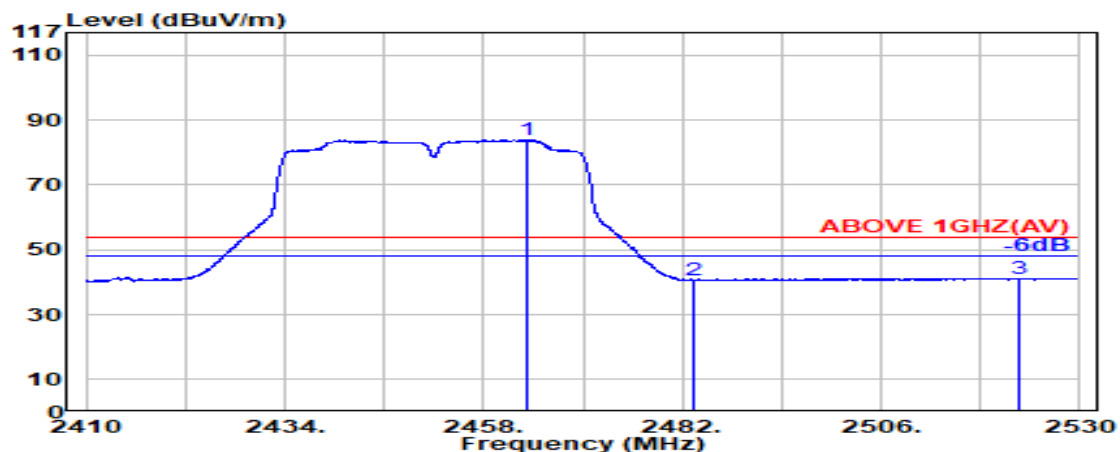

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.100	28.43	6.14	34.51	83.98	84.04	---	---	Average
	2483.500	28.47	6.17	34.52	40.50	40.62	54.00	13.38	Average
	2522.700	28.64	6.22	34.52	40.90	41.23	54.00	12.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

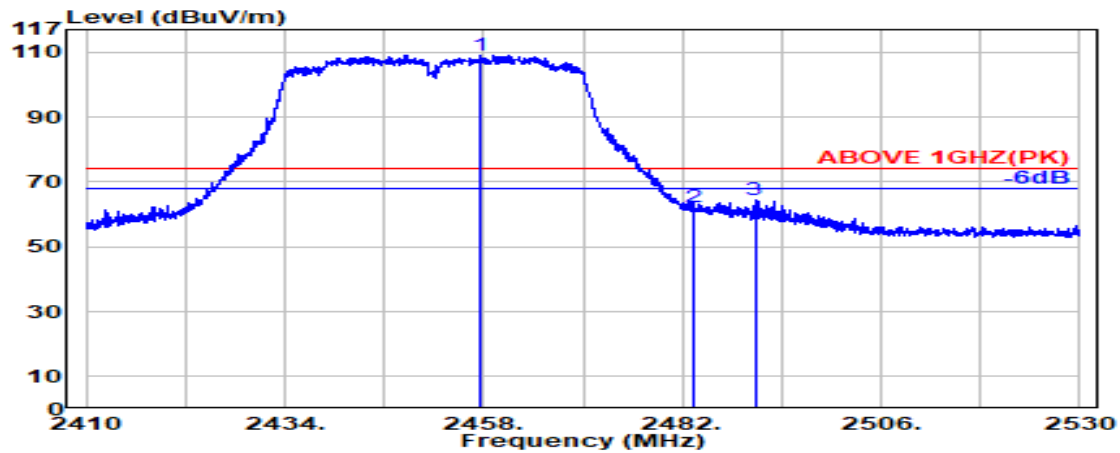

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.550	28.42	6.13	34.51	109.02	109.05	---	---	Peak
	2483.500	28.47	6.17	34.52	62.02	62.14	74.00	11.86	Peak
	2490.750	28.48	6.18	34.52	64.22	64.36	74.00	9.64	Peak

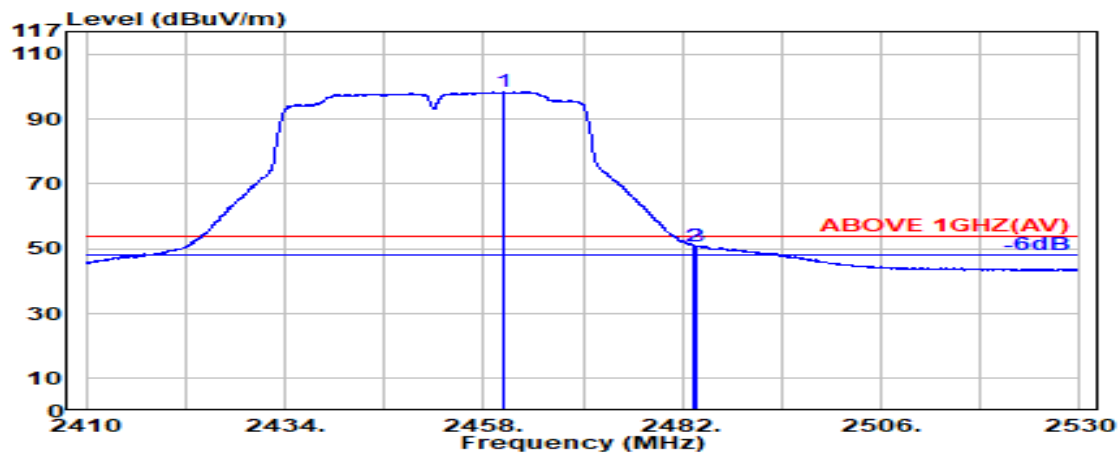

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.350	28.42	6.13	34.51	98.28	98.32	---	---	Average
	2483.500	28.47	6.17	34.52	50.70	50.82	54.00	3.18	Average
	2483.700	28.47	6.17	34.52	50.80	50.92	54.00	3.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

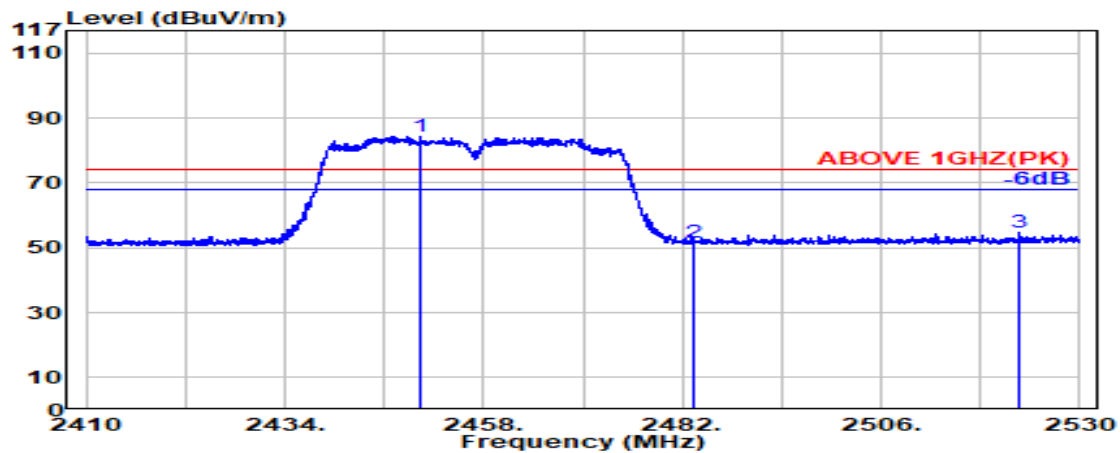

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.350	28.40	6.12	34.51	84.37	84.38	---	---	Peak
2483.500	28.47	6.17	34.52	51.70	51.82	74.00	22.18	Peak
2522.800	28.64	6.22	34.52	54.21	54.54	74.00	19.46	Peak

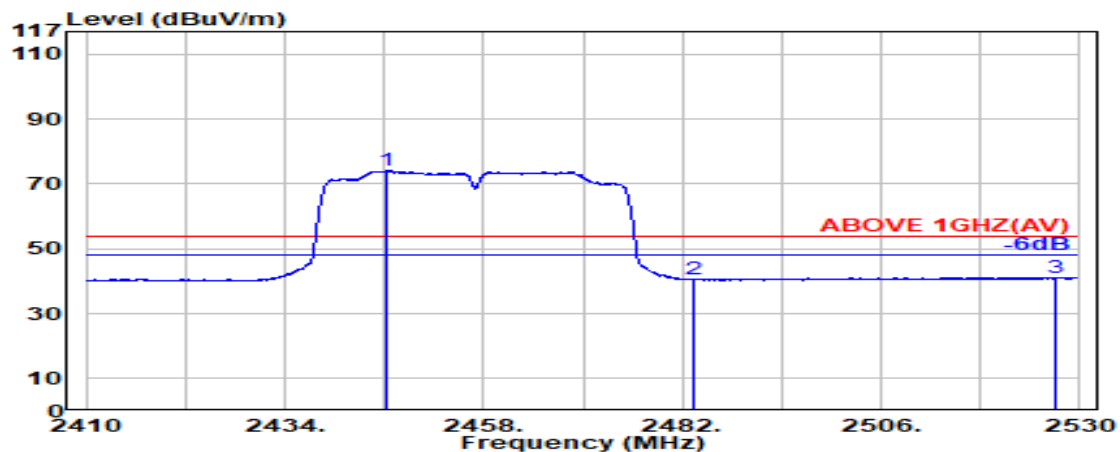

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.350	28.38	6.12	34.51	74.15	74.14	---	---	Average
2483.500	28.47	6.17	34.52	40.34	40.46	54.00	13.54	Average
2527.050	28.66	6.22	34.53	40.84	41.20	54.00	12.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

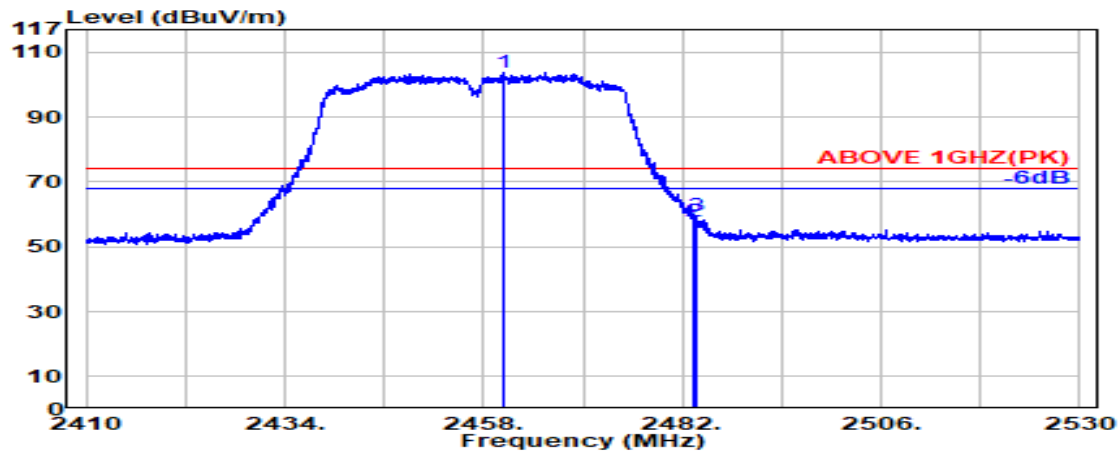

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2460.300	28.42	6.13	34.51	103.70	103.74	---	---	Peak
	2483.500	28.47	6.17	34.52	57.57	57.69	74.00	16.31	Peak
	2483.700	28.47	6.17	34.52	59.46	59.58	74.00	14.42	Peak

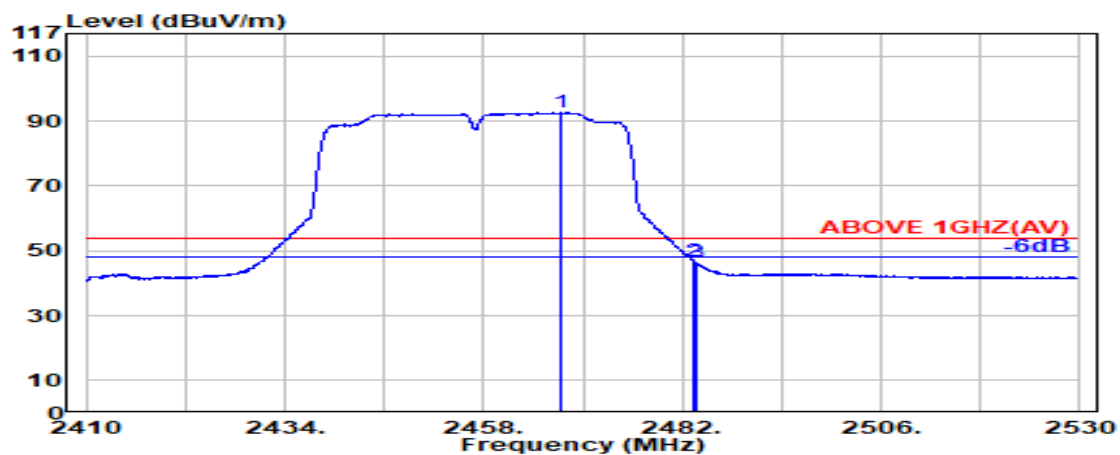

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2467.250	28.43	6.14	34.51	92.65	92.72	---	---	Average
	2483.500	28.47	6.17	34.52	46.53	46.65	54.00	7.35	Average
	2483.700	28.47	6.17	34.52	46.06	46.18	54.00	7.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

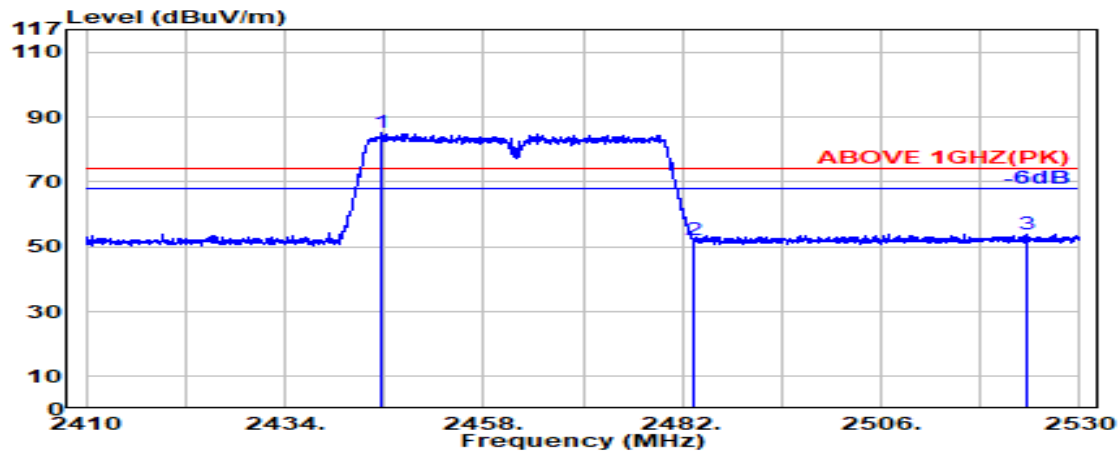

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.750	28.37	6.11	34.51	85.13	85.11	---	---	Peak
	2483.500	28.47	6.17	34.52	51.86	51.98	74.00	22.02	Peak
	2523.550	28.64	6.22	34.53	53.74	54.07	74.00	19.93	Peak

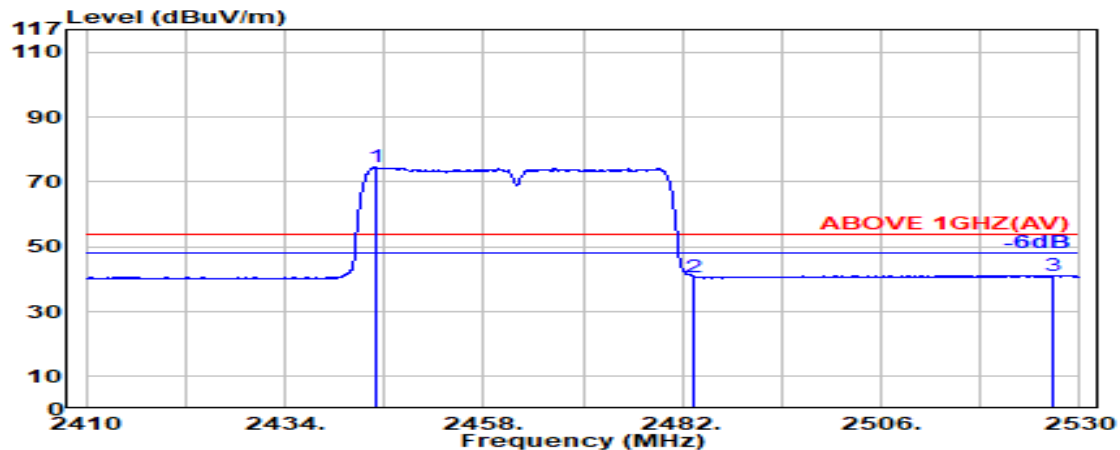


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2444.950	28.37	6.11	34.51	74.54	74.51	---	---	Average
	2483.500	28.47	6.17	34.52	40.63	40.75	54.00	13.25	Average
	2526.750	28.66	6.22	34.53	40.77	41.13	54.00	12.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

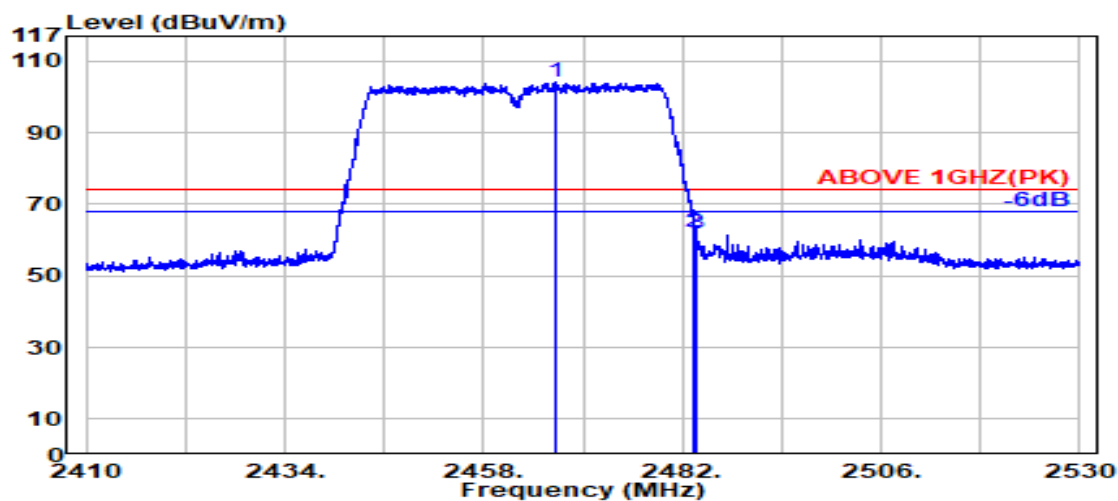

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.700	28.43	6.14	34.51	104.03	104.09	---	---	Peak
2483.500	28.47	6.17	34.52	62.15	62.26	74.00	11.74	Peak
2483.700	28.47	6.17	34.52	61.65	61.77	74.00	12.23	Peak

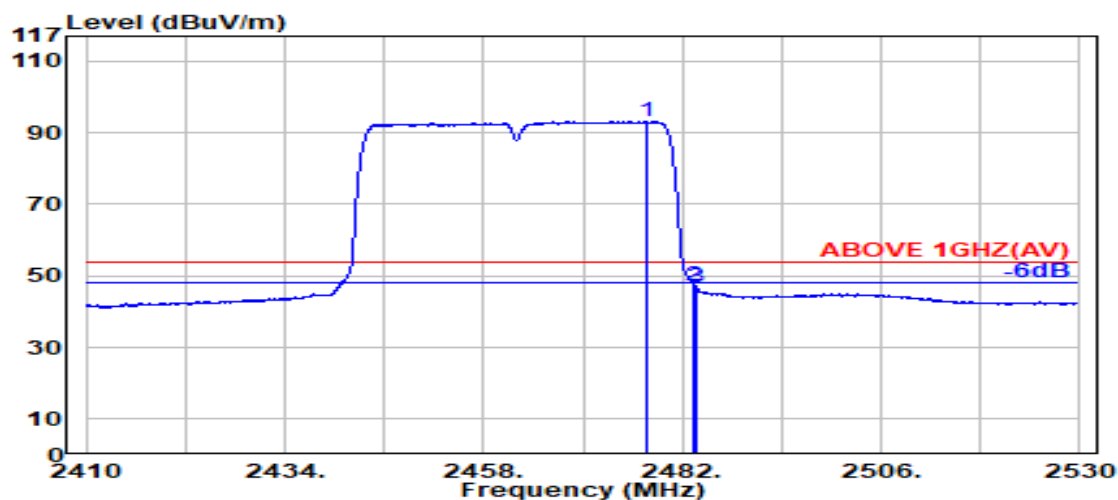

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.650	28.46	6.16	34.52	93.06	93.16	---	---	Average
2483.500	28.47	6.17	34.52	46.97	47.09	54.00	6.91	Average
2483.700	28.47	6.17	34.52	46.69	46.81	54.00	7.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

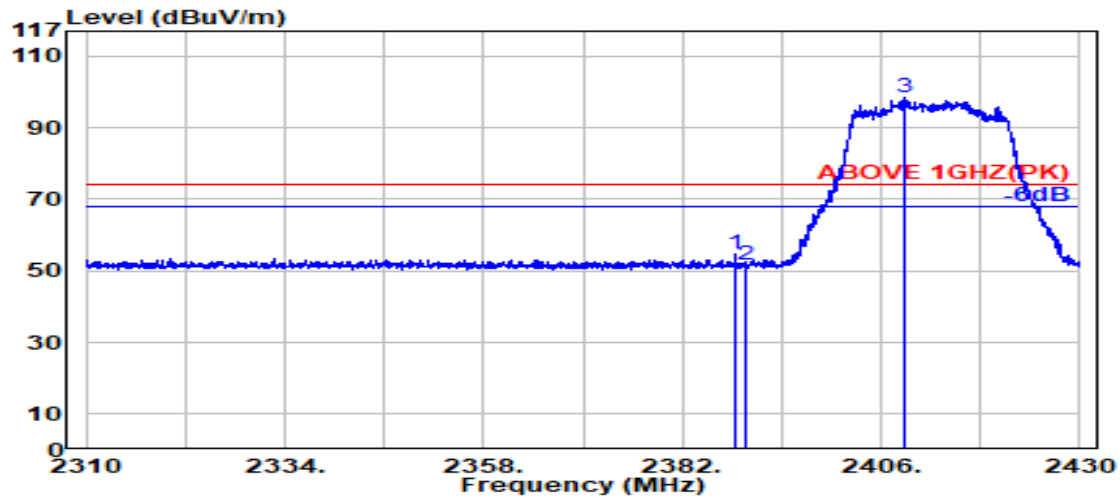

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.450	28.19	6.03	34.50	54.87	54.60	74.00	19.40	Peak
2389.800	28.18	6.03	34.50	52.15	51.87	74.00	22.13	Peak
@ 2408.950	28.15	6.06	34.50	98.79	98.50	---	---	Peak

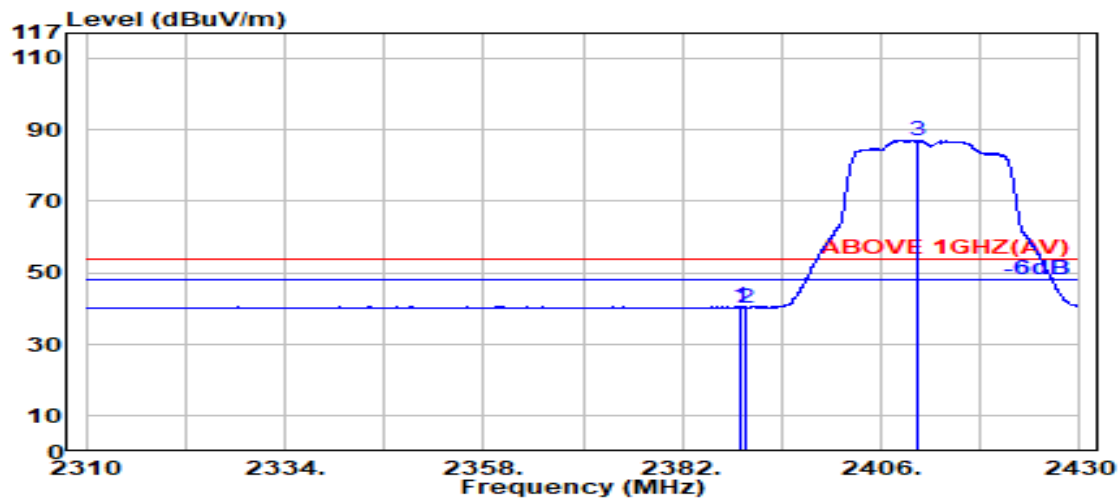

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.50	40.93	40.65	54.00	13.35	Average
2389.800	28.18	6.03	34.50	40.58	40.29	54.00	13.71	Average
@ 2410.450	28.16	6.06	34.50	87.38	87.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240538


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

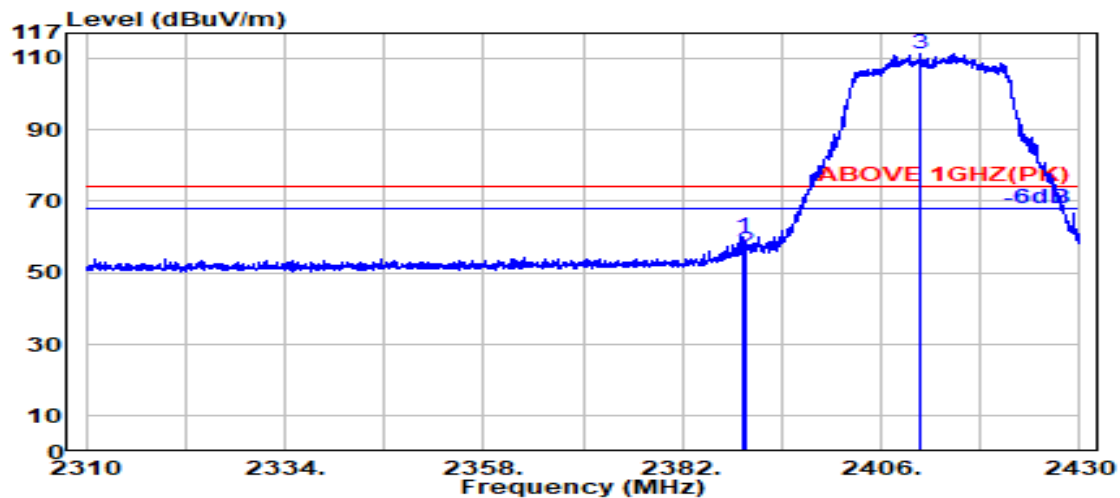

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.50	60.20	59.92	74.00	14.08	Peak
2389.800	28.18	6.03	34.50	56.51	56.23	74.00	17.77	Peak
@ 2410.750	28.17	6.06	34.50	111.43	111.16	---	---	Peak

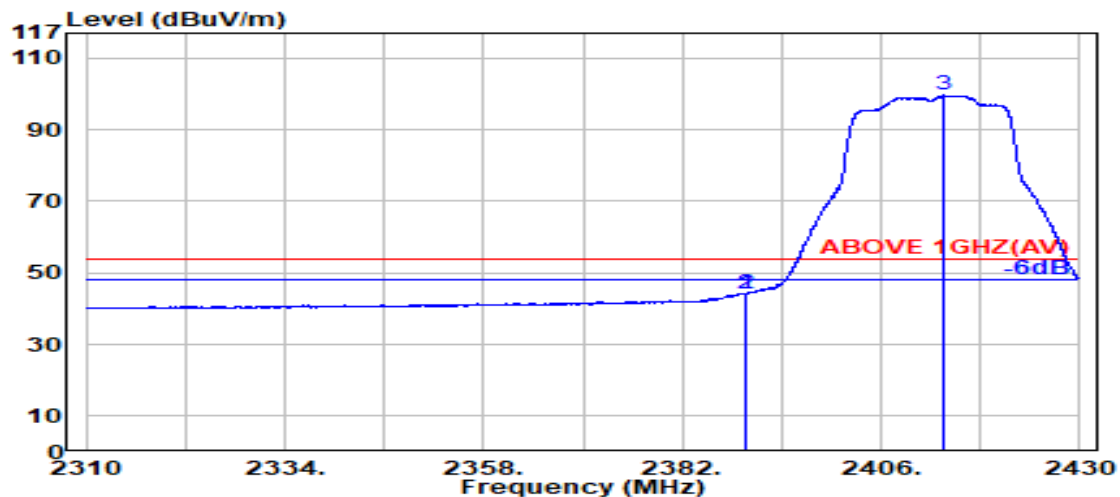

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	44.65	44.37	54.00	9.63	Average
2389.800	28.18	6.03	34.50	44.64	44.36	54.00	9.64	Average
@ 2413.600	28.18	6.07	34.50	99.84	99.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

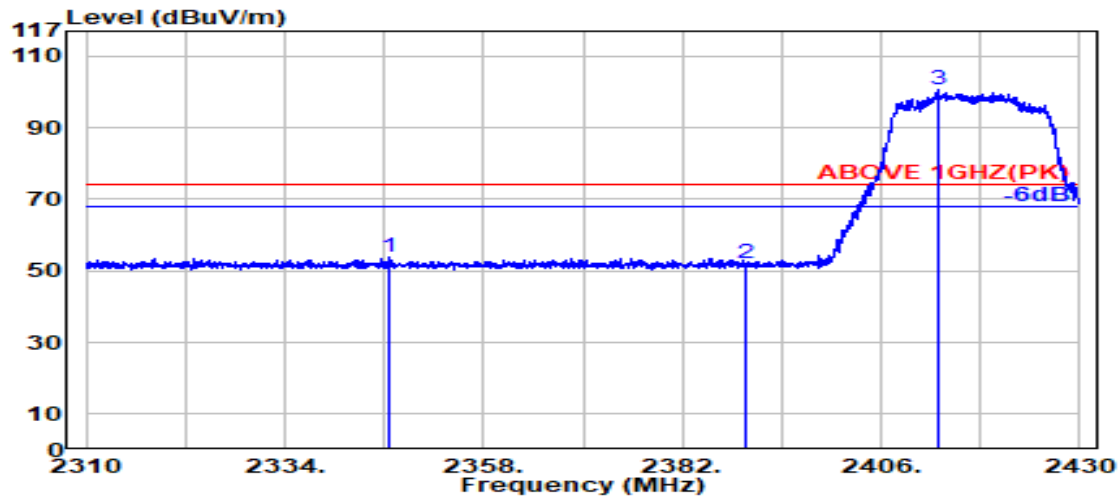

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2346.700	28.47	5.97	34.49	53.90	53.86	74.00	20.14	Peak
2389.800	28.18	6.03	34.50	52.18	51.90	74.00	22.10	Peak
@ 2413.000	28.18	6.07	34.50	100.98	100.72	---	---	Peak

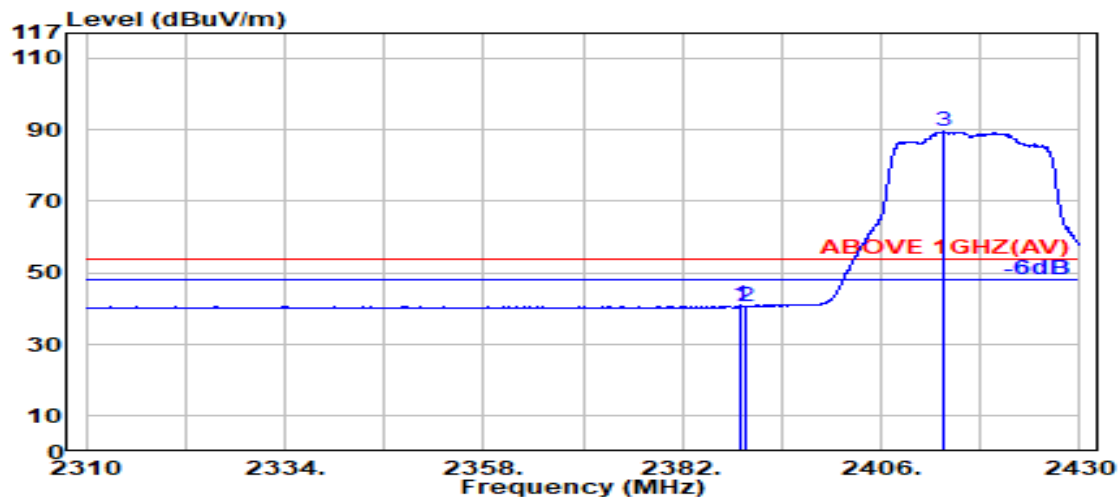

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.50	41.13	40.85	54.00	13.15	Average
2389.800	28.18	6.03	34.50	40.74	40.46	54.00	13.54	Average
@ 2413.650	28.18	6.07	34.50	89.67	89.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

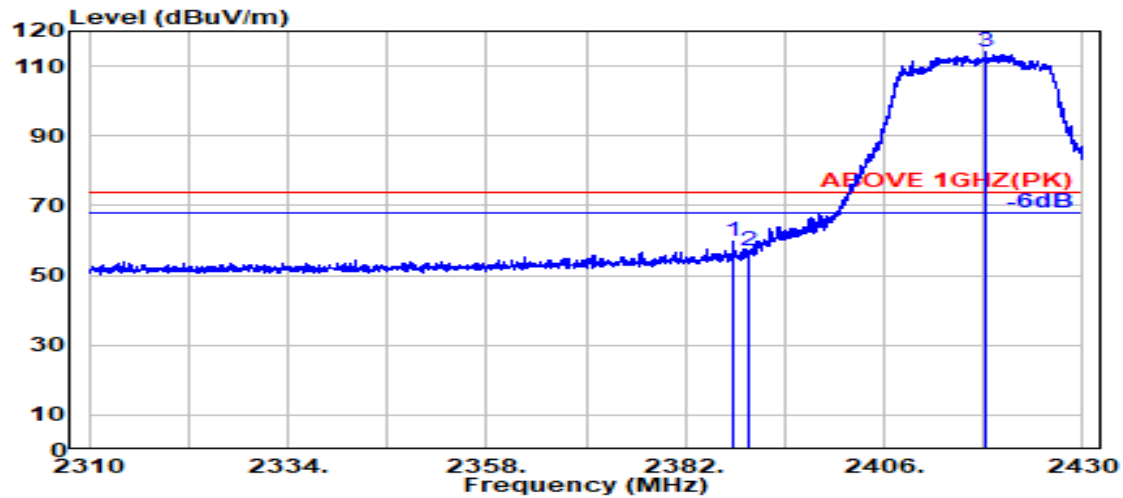

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	28.20	6.03	34.50	59.99	59.72	74.00	14.28	Peak
2389.800	28.18	6.03	34.50	57.36	57.07	74.00	16.93	Peak
@ 2418.300	28.21	6.08	34.50	114.26	114.04	---	---	Peak

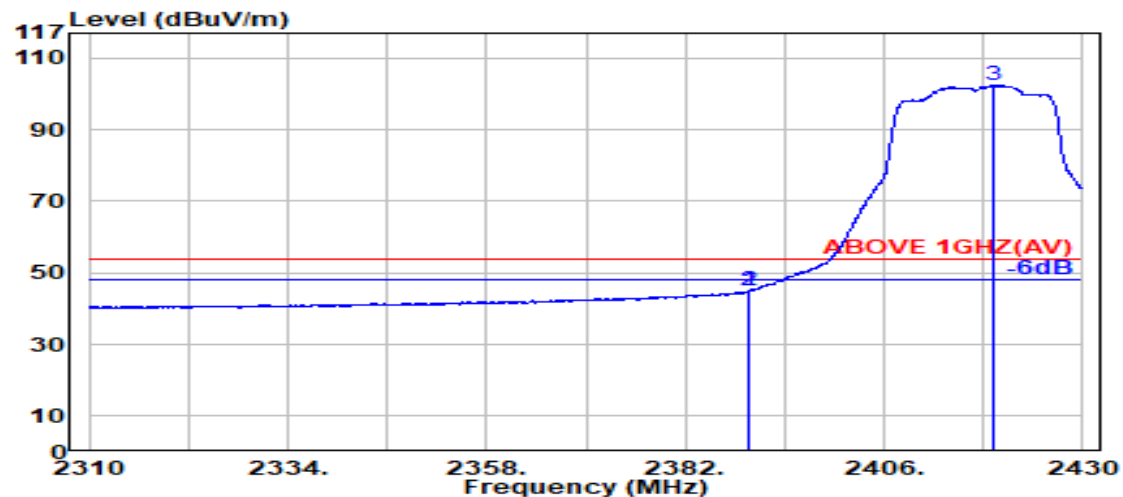

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	45.18	44.90	54.00	9.10	Average
2389.800	28.18	6.03	34.50	45.28	44.99	54.00	9.01	Average
@ 2419.200	28.22	6.08	34.50	102.60	102.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

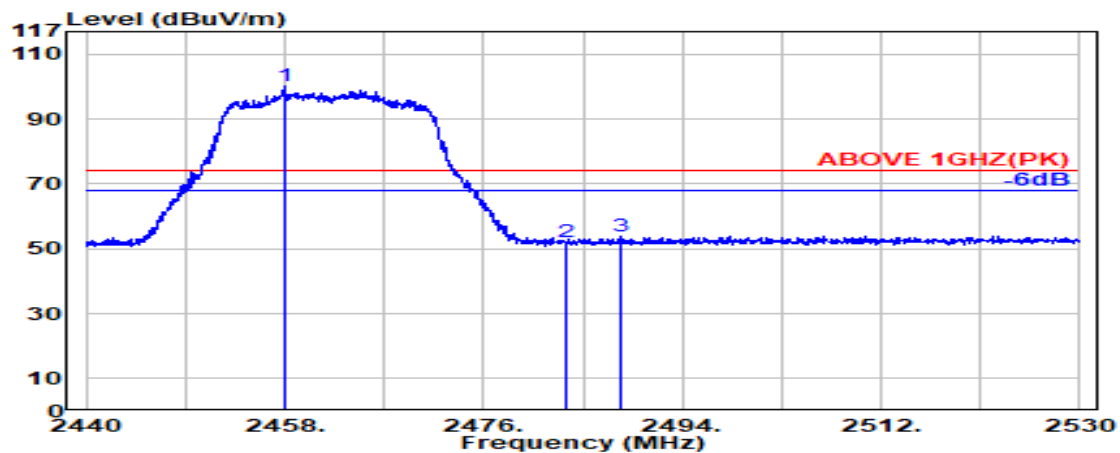

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.900	28.42	6.13	34.51	100.22	100.26	---	---	Peak
	2483.500	28.47	6.17	34.52	52.01	52.12	74.00	21.88	Peak
	2488.350	28.48	6.17	34.52	53.76	53.89	74.00	20.11	Peak

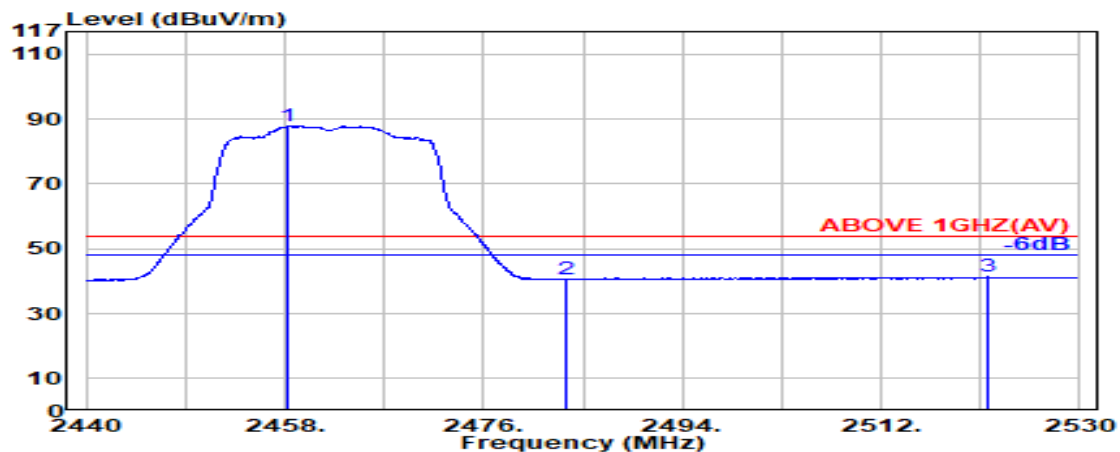

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.350	28.42	6.13	34.51	87.84	87.88	---	---	Average
	2483.500	28.47	6.17	34.52	40.59	40.71	54.00	13.29	Average
	2521.700	28.63	6.22	34.52	41.06	41.39	54.00	12.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

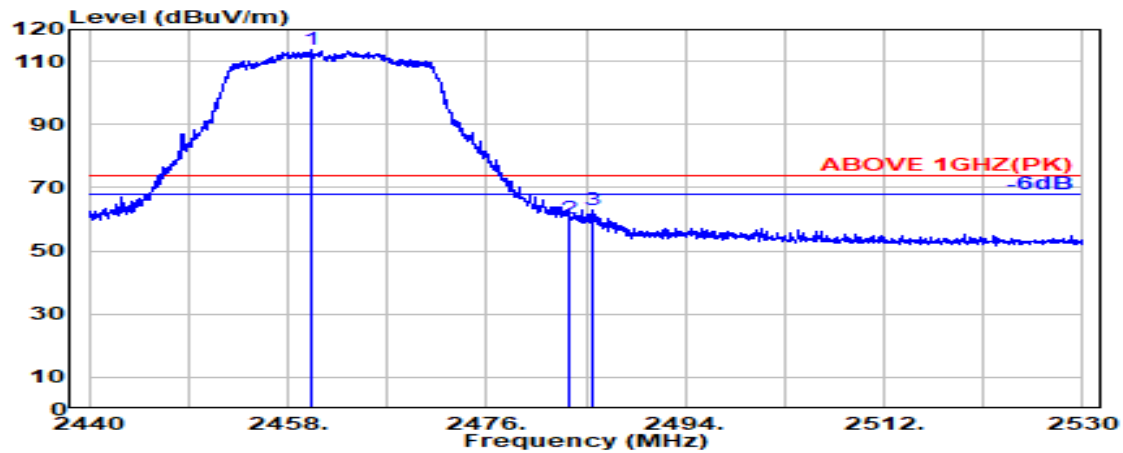

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.050	28.42	6.13	34.51	113.71	113.76	---	---	Peak
	2483.500	28.47	6.17	34.52	60.15	60.27	74.00	13.73	Peak
	2485.700	28.47	6.17	34.52	62.87	62.99	74.00	11.01	Peak

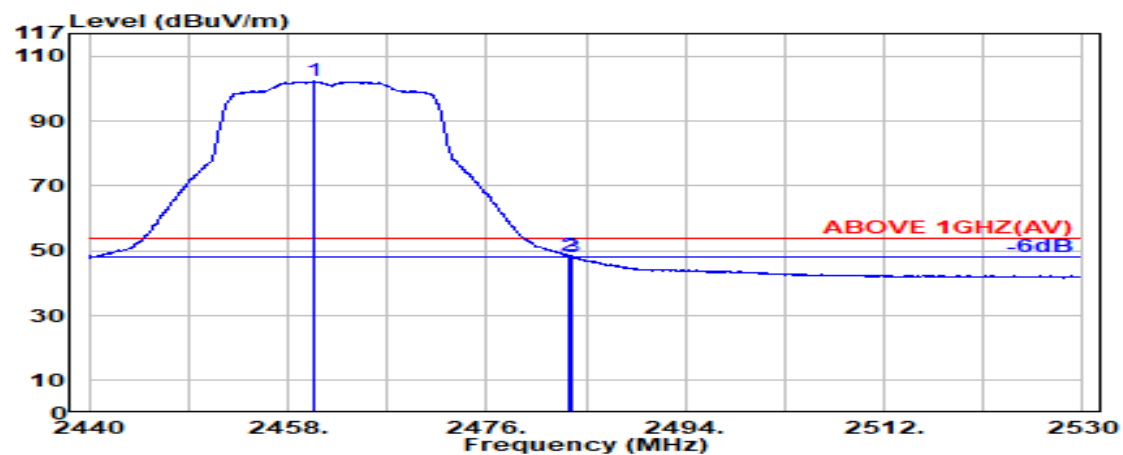

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.450	28.42	6.13	34.51	102.26	102.30	---	---	Average
	2483.500	28.47	6.17	34.52	48.32	48.44	54.00	5.56	Average
	2483.750	28.47	6.17	34.52	48.15	48.27	54.00	5.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

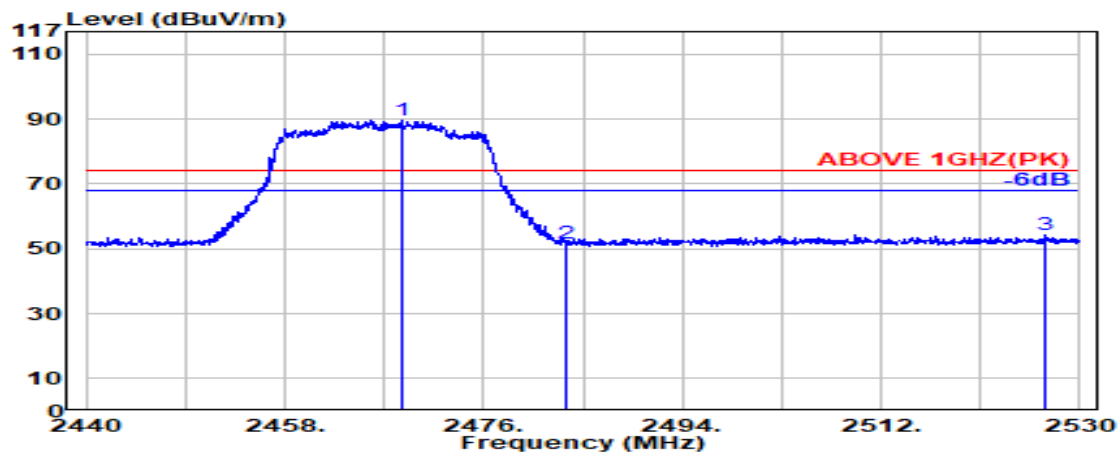

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.600	28.44	6.15	34.51	89.62	89.69	---	---	Peak
2483.500	28.47	6.17	34.52	51.65	51.77	74.00	22.23	Peak
2526.800	28.66	6.22	34.53	54.06	54.41	74.00	19.59	Peak

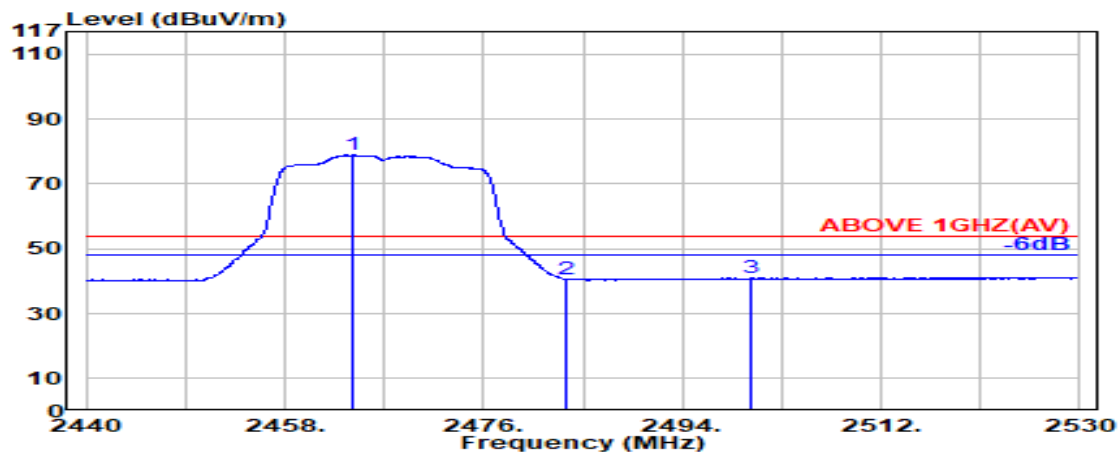

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.250	28.43	6.14	34.51	78.98	79.04	---	---	Average
2483.500	28.47	6.17	34.52	40.58	40.70	54.00	13.30	Average
2500.300	28.50	6.19	34.52	40.96	41.13	54.00	12.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

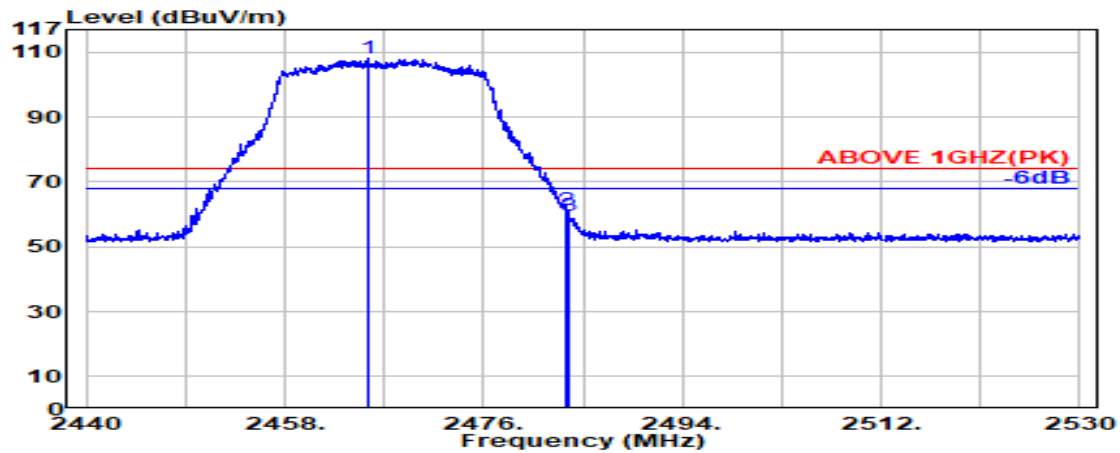

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.500	28.43	6.14	34.51	108.12	108.18	---	---	Peak
	2483.500	28.47	6.17	34.52	61.09	61.20	74.00	12.80	Peak
	2483.700	28.47	6.17	34.52	59.68	59.80	74.00	14.20	Peak

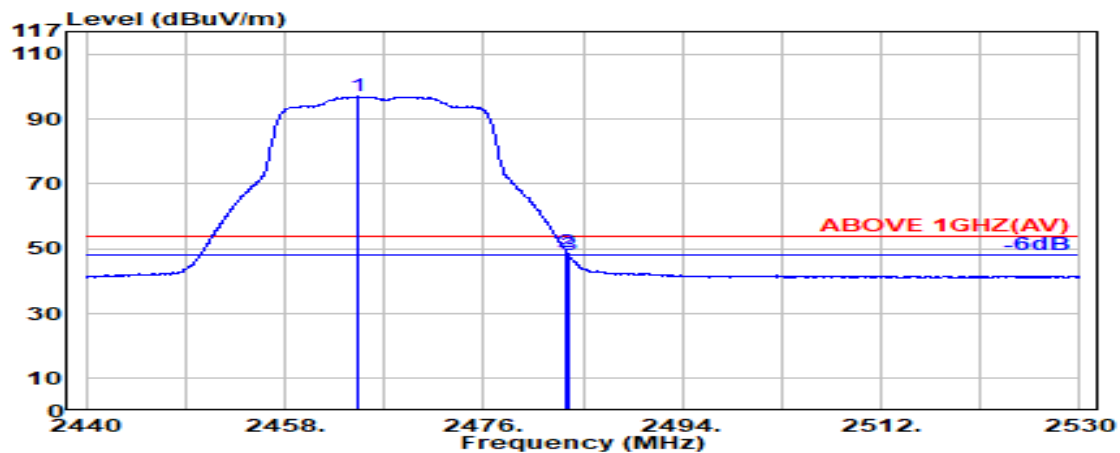

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.500	28.43	6.14	34.51	96.86	96.91	---	---	Average
	2483.500	28.47	6.17	34.52	48.90	49.02	54.00	4.98	Average
	2483.700	28.47	6.17	34.52	48.05	48.17	54.00	5.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

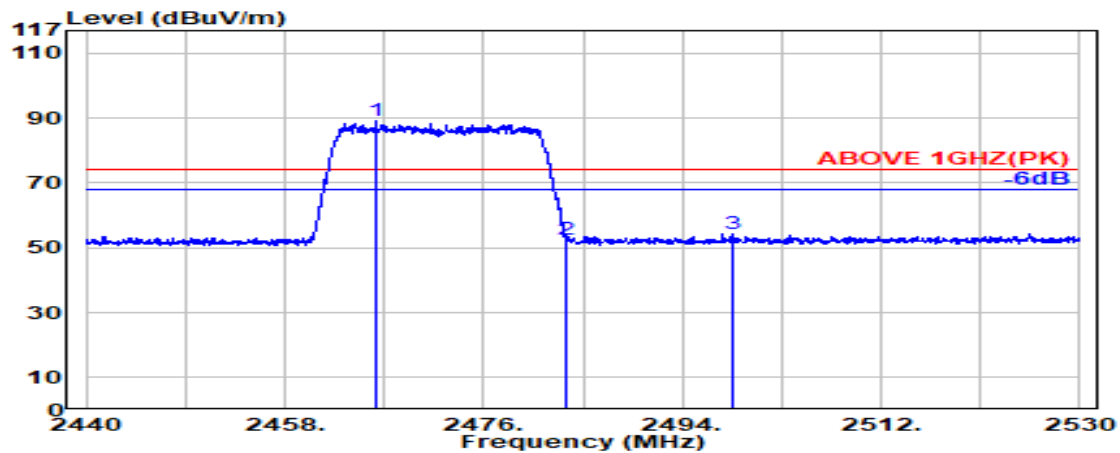

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	89.27	89.33	74.00	-15.33	Peak
2483.500	28.47	6.17	34.52	52.33	52.45	74.00	21.55	Peak
2498.650	28.50	6.19	34.52	54.36	54.52	74.00	19.48	Peak

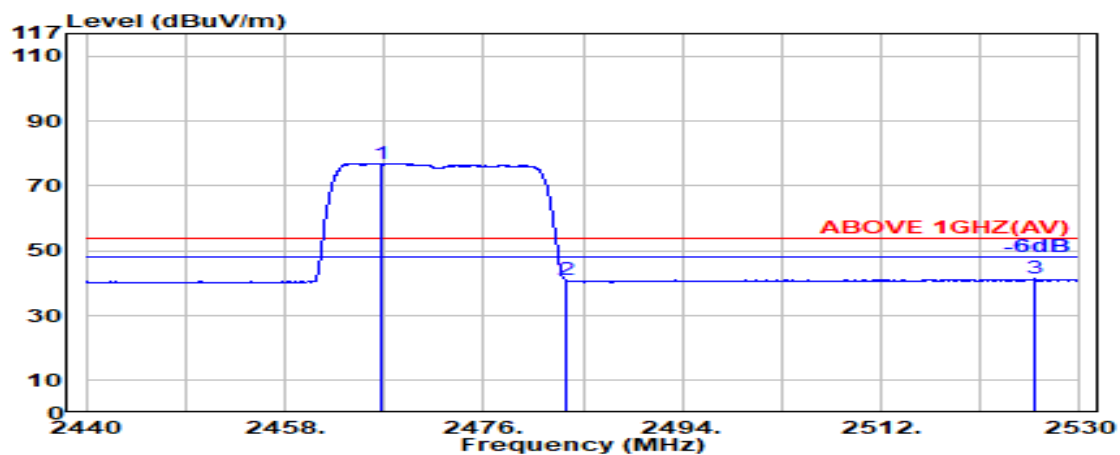

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.650	28.43	6.14	34.51	76.96	77.02	54.00	-23.02	Average
2483.500	28.47	6.17	34.52	40.82	40.94	54.00	13.06	Average
2525.900	28.66	6.22	34.53	40.98	41.33	54.00	12.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

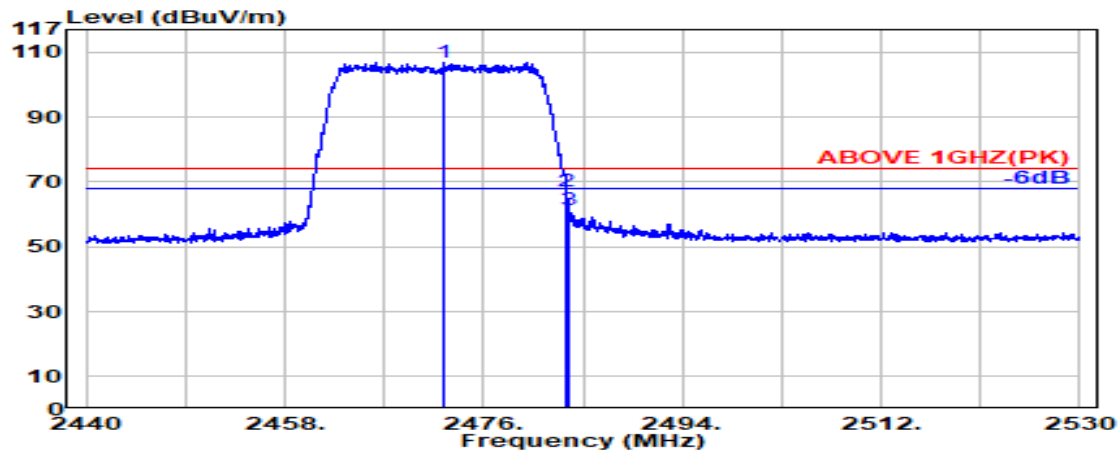

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.350	28.44	6.15	34.51	106.63	106.71	74.00	-32.71	Peak
2483.500	28.47	6.17	34.52	66.82	66.94	74.00	7.06	Peak
2483.800	28.47	6.17	34.52	61.19	61.31	74.00	12.69	Peak

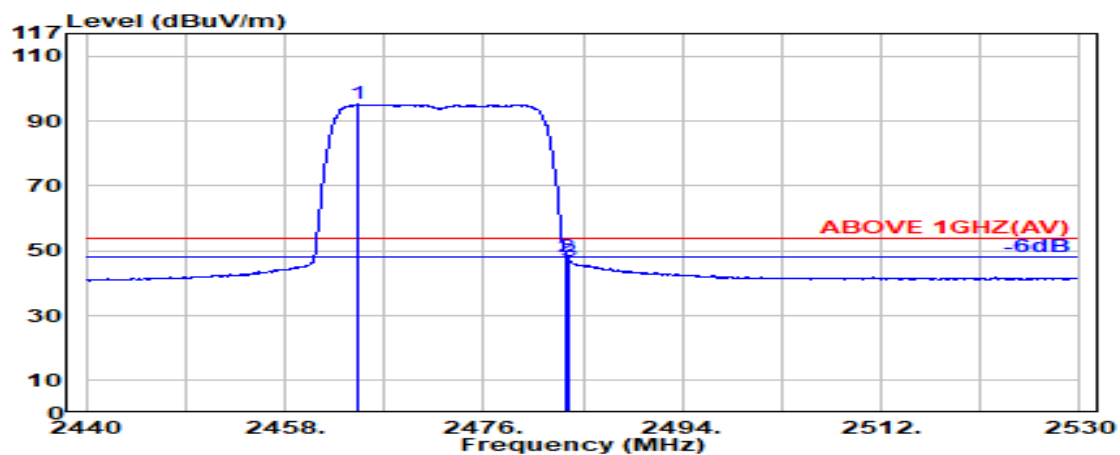

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.43	6.14	34.51	95.11	95.17	54.00	-41.17	Average
2483.500	28.47	6.17	34.52	48.17	48.29	54.00	5.71	Average
2483.700	28.47	6.17	34.52	46.84	46.95	54.00	7.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

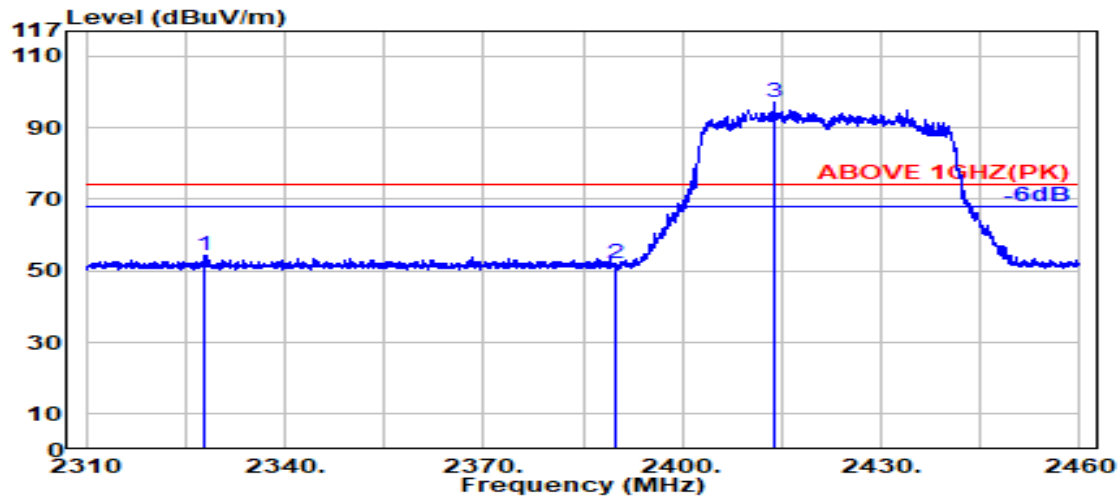

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.000	28.33	5.94	34.48	54.45	54.23	74.00	19.77	Peak
2389.800	28.18	6.03	34.50	52.40	52.12	74.00	21.88	Peak
@ 2413.750	28.18	6.07	34.50	97.43	97.18	---	---	Peak

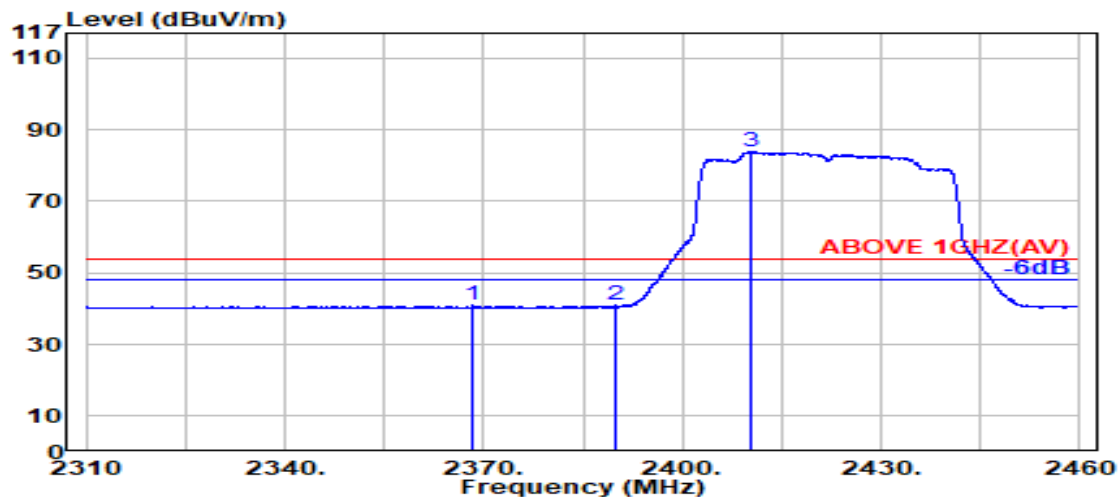

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2368.350	28.35	6.00	34.49	41.05	40.91	54.00	13.09	Average
2389.800	28.18	6.03	34.50	41.13	40.85	54.00	13.15	Average
@ 2410.450	28.16	6.06	34.50	84.21	83.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

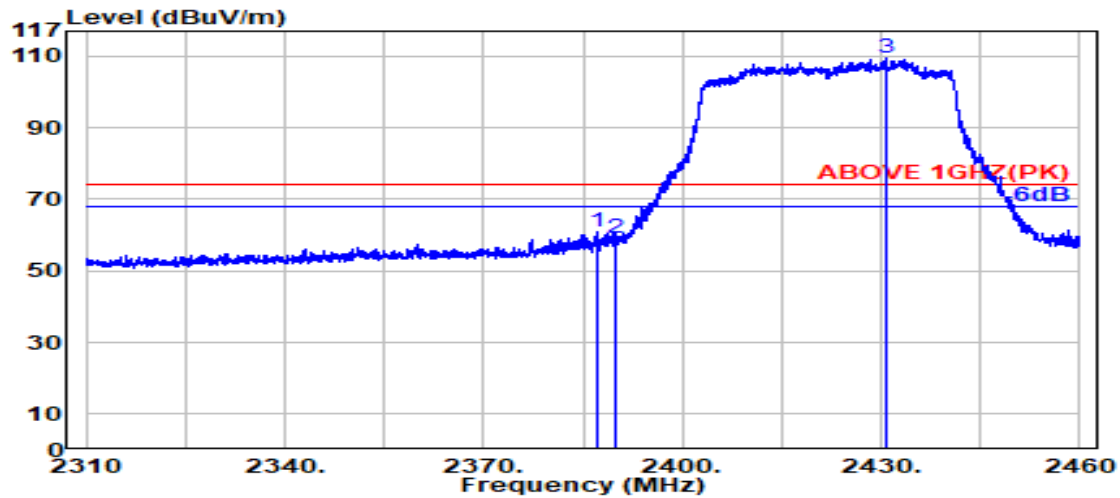

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.20	6.03	34.50	61.41	61.14	74.00	12.86	Peak
2389.800	28.18	6.03	34.50	59.63	59.34	74.00	14.66	Peak
@ 2430.850	28.29	6.09	34.51	109.49	109.36	---	---	Peak

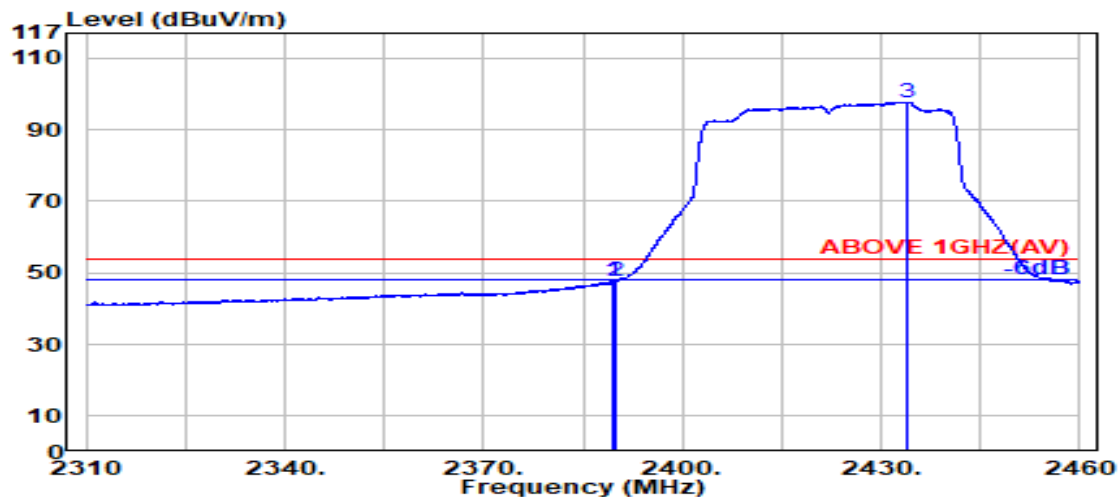

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	48.09	47.81	54.00	6.19	Average
2389.800	28.18	6.03	34.50	47.93	47.64	54.00	6.36	Average
@ 2434.050	28.30	6.10	34.51	97.89	97.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

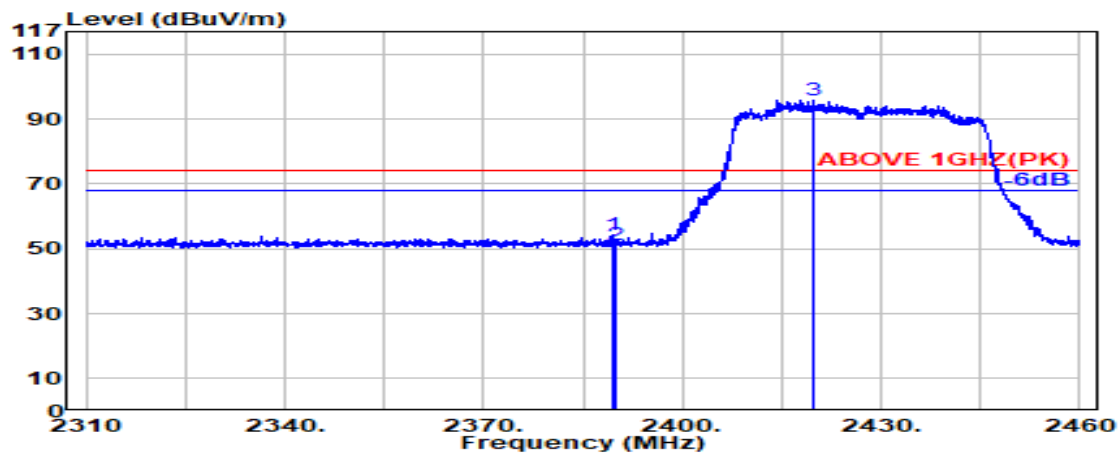

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.18	6.03	34.50	54.59	54.31	74.00	19.69	Peak
2389.800	28.18	6.03	34.50	51.67	51.39	74.00	22.61	Peak
@ 2419.650	28.22	6.08	34.50	96.13	95.92	---	---	Peak

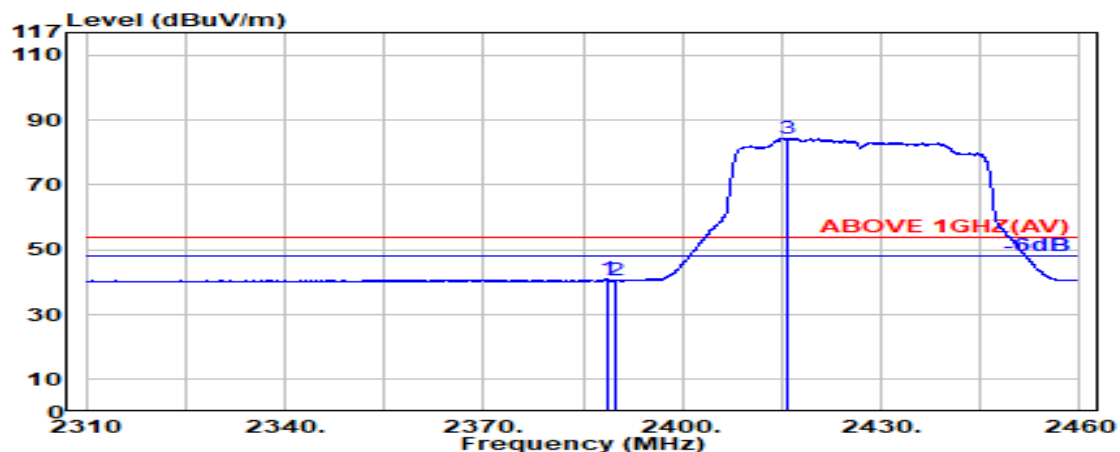

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.19	6.03	34.50	41.16	40.89	54.00	13.11	Average
2389.800	28.18	6.03	34.50	40.85	40.56	54.00	13.44	Average
@ 2416.000	28.20	6.07	34.50	84.68	84.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

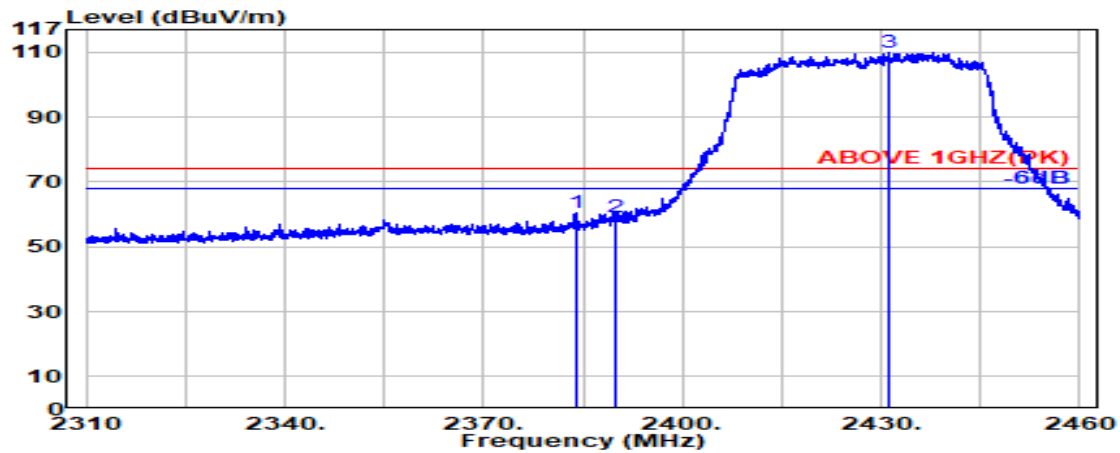

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.100	28.23	6.03	34.50	60.73	60.49	74.00	13.51	Peak
2389.800	28.18	6.03	34.50	59.59	59.31	74.00	14.69	Peak
@ 2431.050	28.29	6.09	34.51	109.94	109.82	---	---	Peak

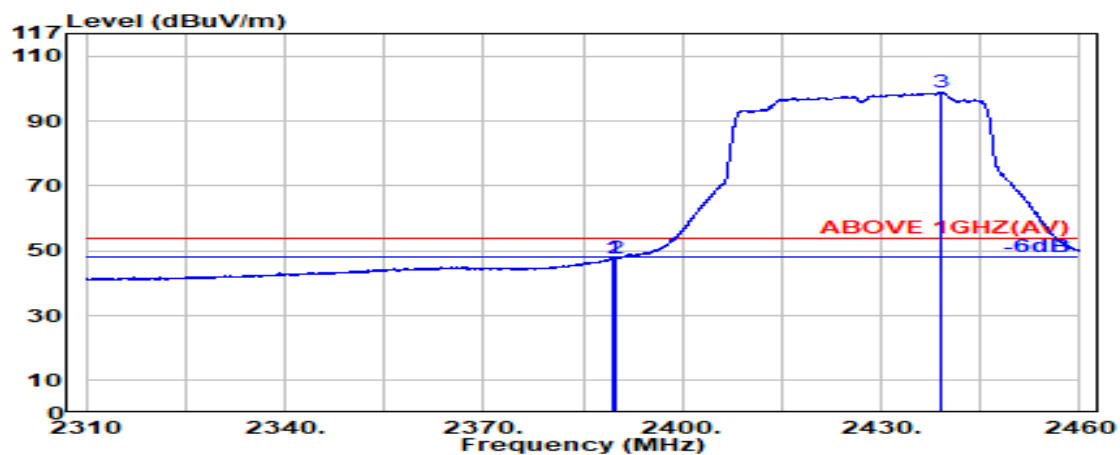

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	47.86	47.58	54.00	6.42	Average
2389.800	28.18	6.03	34.50	47.82	47.54	54.00	6.46	Average
@ 2438.900	28.33	6.10	34.51	98.94	98.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

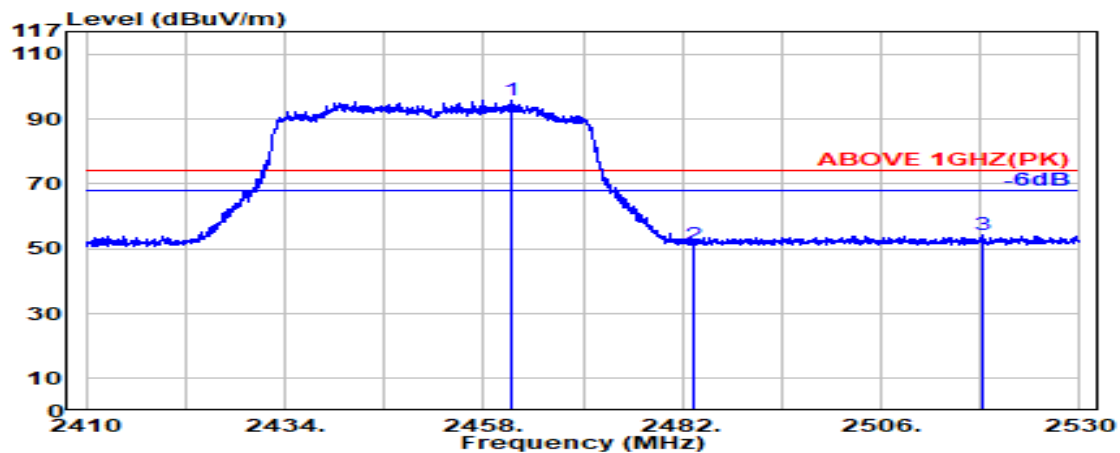

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.350	28.42	6.14	34.51	95.72	95.77	---	---	Peak
	2483.500	28.47	6.17	34.52	51.17	51.29	74.00	22.71	Peak
	2518.300	28.61	6.21	34.52	54.17	54.47	74.00	19.53	Peak

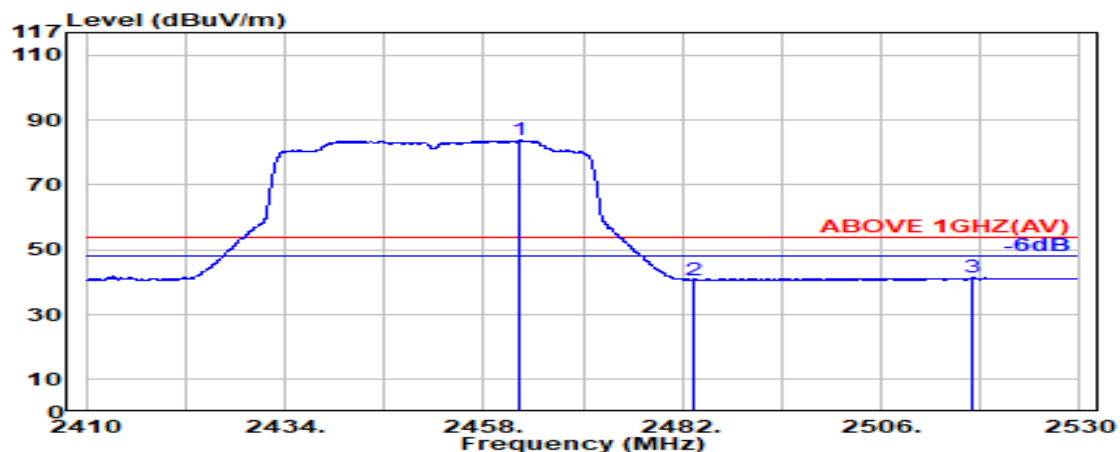

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.450	28.43	6.14	34.51	83.67	83.72	---	---	Average
	2483.500	28.47	6.17	34.52	40.62	40.74	54.00	13.26	Average
	2517.150	28.60	6.21	34.52	41.06	41.35	54.00	12.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

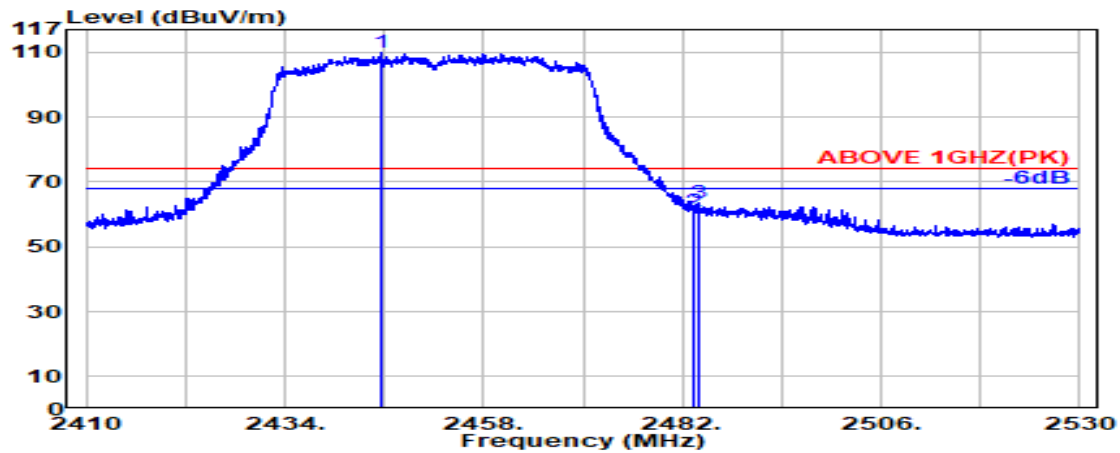

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.600	28.37	6.11	34.51	109.87	109.85	---	---	Peak
2483.500	28.47	6.17	34.52	60.65	60.77	74.00	13.23	Peak
2484.050	28.47	6.17	34.52	63.34	63.46	74.00	10.54	Peak

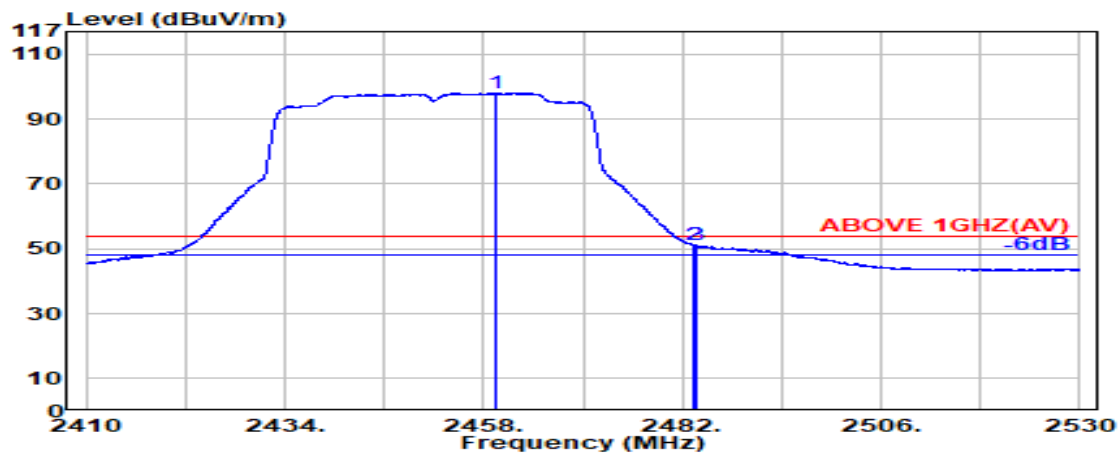


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.350	28.42	6.13	34.51	98.09	98.13	---	---	Average
2483.500	28.47	6.17	34.52	51.01	51.13	54.00	2.87	Average
2483.700	28.47	6.17	34.52	51.29	51.40	54.00	2.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

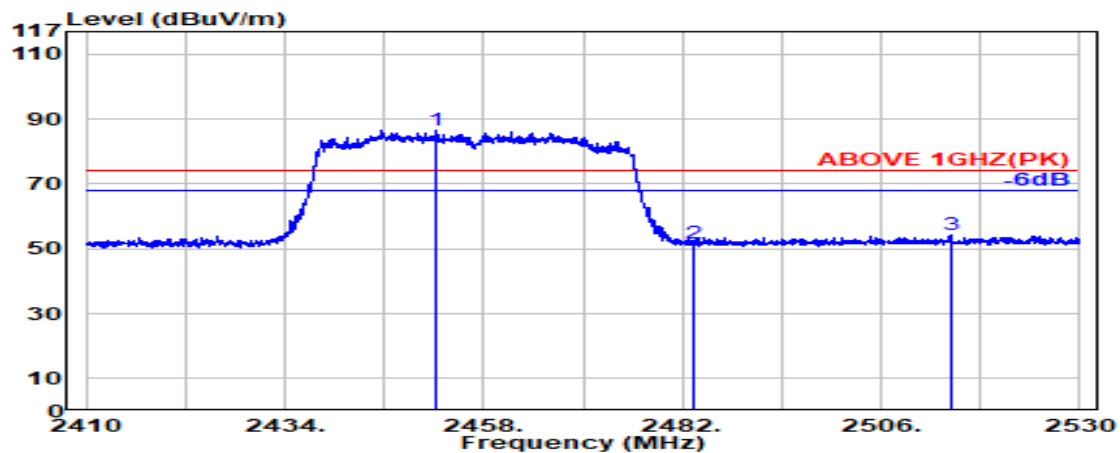

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.200	28.40	6.12	34.51	86.42	86.43	---	---	Peak
	2483.500	28.47	6.17	34.52	51.55	51.67	74.00	22.33	Peak
	2514.350	28.59	6.21	34.52	53.99	54.26	74.00	19.74	Peak

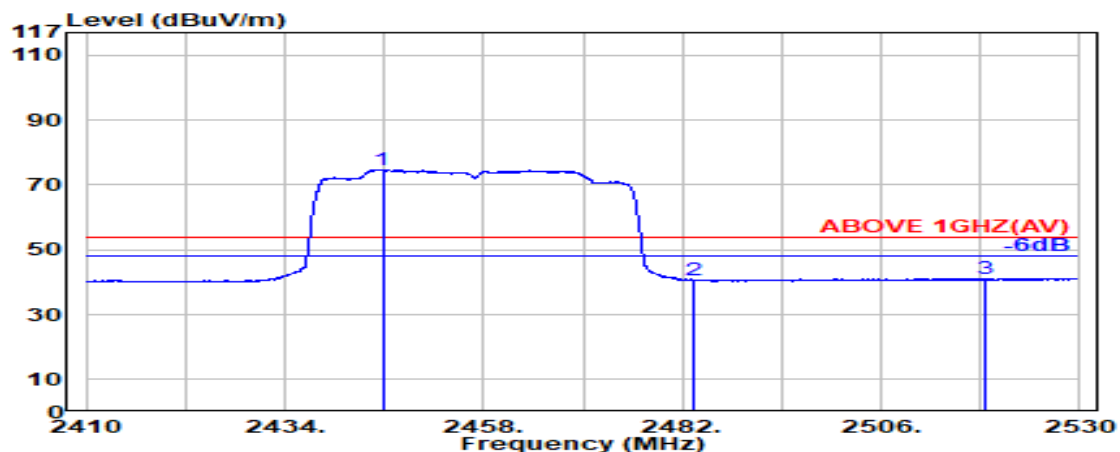

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.800	28.38	6.11	34.51	74.85	74.83	---	---	Average
	2483.500	28.47	6.17	34.52	40.41	40.53	54.00	13.47	Average
	2518.450	28.61	6.21	34.52	40.93	41.23	54.00	12.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

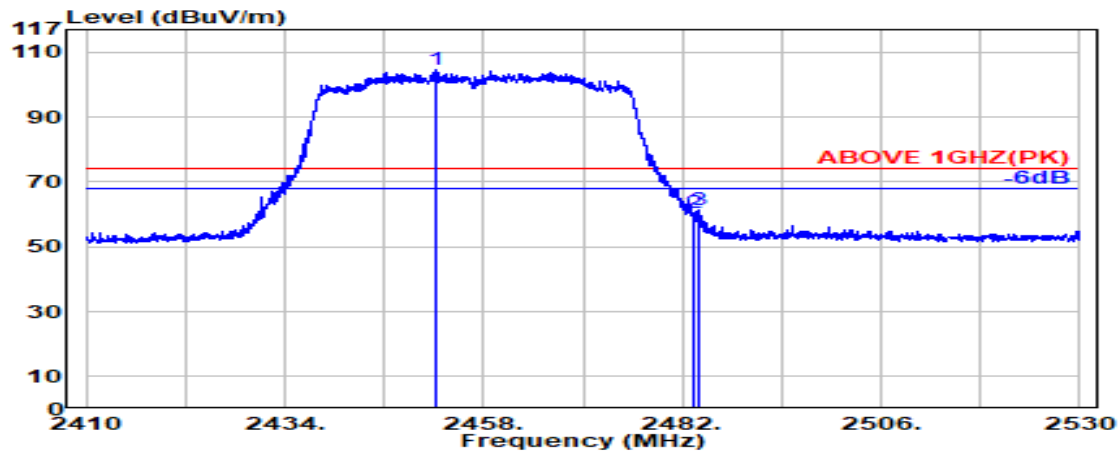

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.350	28.40	6.12	34.51	104.40	104.42	---	---	Peak
	2483.500	28.47	6.17	34.52	60.34	60.46	74.00	13.54	Peak
	2483.850	28.47	6.17	34.52	61.12	61.24	74.00	12.76	Peak

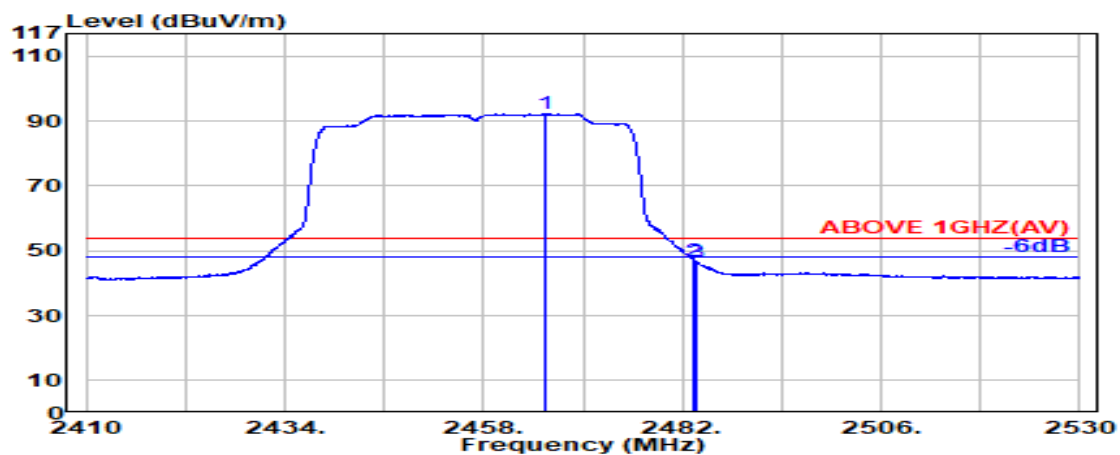

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.500	28.43	6.14	34.51	92.30	92.36	---	---	Average
	2483.500	28.47	6.17	34.52	46.80	46.92	54.00	7.08	Average
	2483.750	28.47	6.17	34.52	46.28	46.40	54.00	7.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

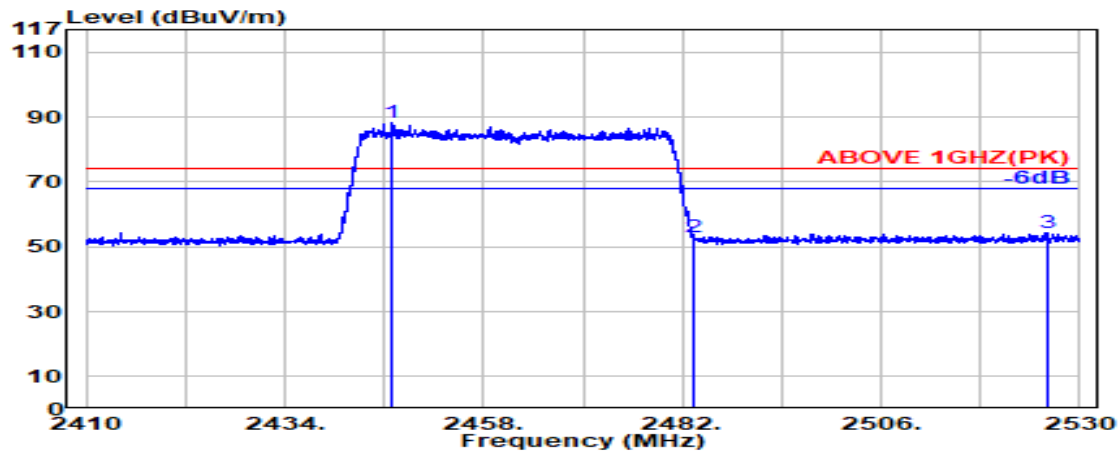

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.050	28.38	6.12	34.51	88.32	88.31	---	---	Peak
2483.500	28.47	6.17	34.52	53.04	53.15	74.00	20.85	Peak
2526.000	28.66	6.22	34.53	53.81	54.17	74.00	19.83	Peak

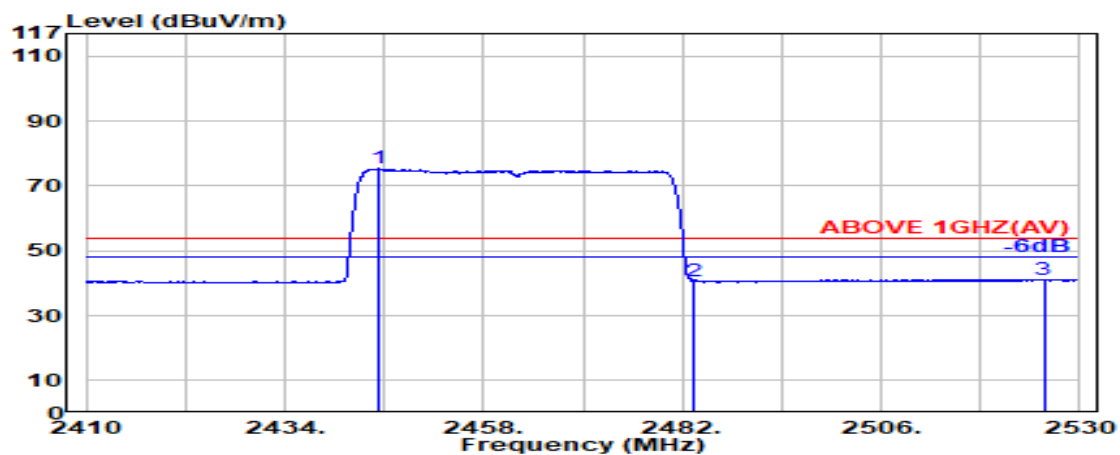

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.400	28.37	6.11	34.51	75.38	75.36	---	---	Average
2483.500	28.47	6.17	34.52	40.51	40.63	54.00	13.37	Average
2525.650	28.65	6.22	34.53	40.87	41.22	54.00	12.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

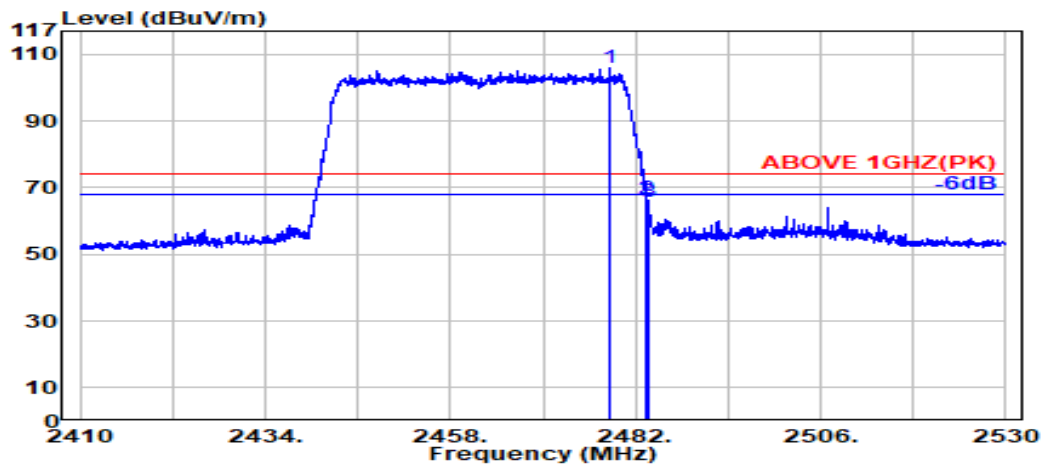

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.750	28.46	6.16	34.52	105.95	106.06	---	---	Peak
2483.500	28.47	6.17	34.52	66.36	66.48	74.00	7.52	Peak
2483.700	28.47	6.17	34.52	65.84	65.95	74.00	8.05	Peak

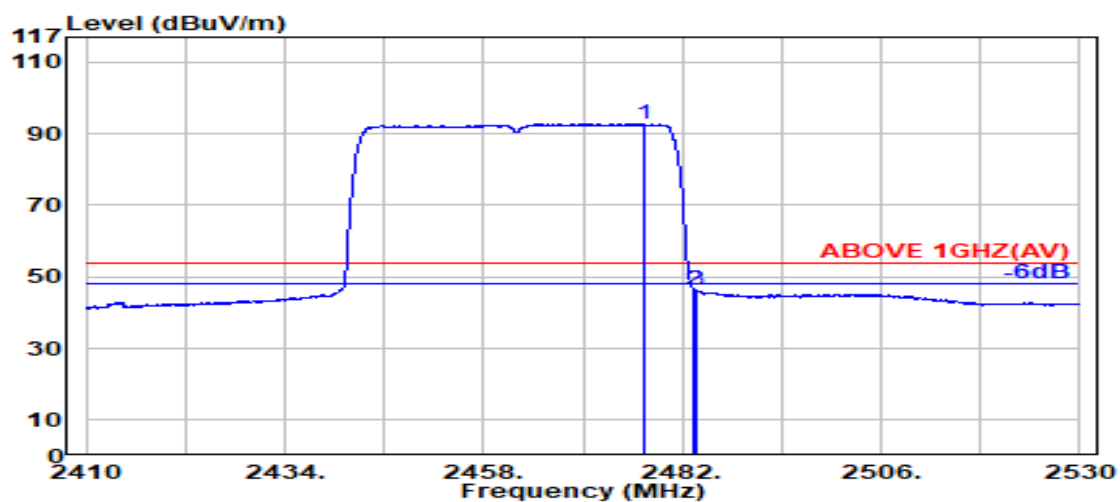

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.250	28.45	6.16	34.52	92.59	92.69	---	---	Average
2483.500	28.47	6.17	34.52	46.20	46.31	54.00	7.69	Average
2483.700	28.47	6.17	34.52	46.25	46.37	54.00	7.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

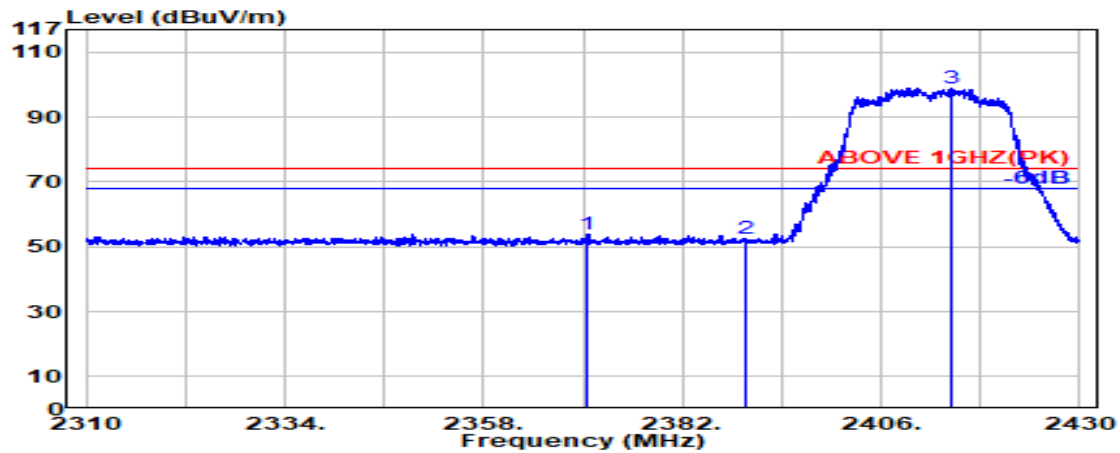

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2370.600	28.33	6.01	34.49	54.16	54.01	74.00	19.99	Peak
2389.800	28.18	6.03	34.50	52.69	52.40	74.00	21.60	Peak
@ 2414.450	28.19	6.07	34.50	99.12	98.88	---	---	Peak

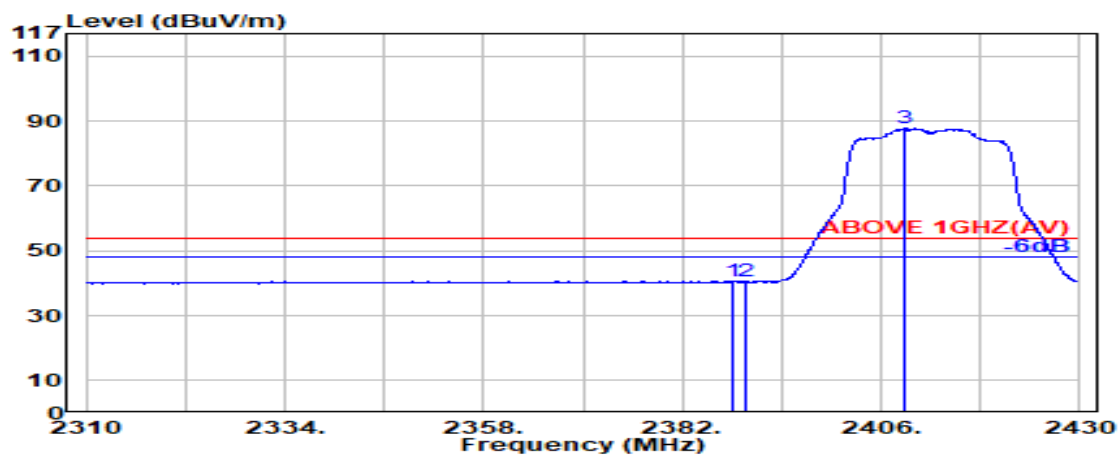

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.950	28.20	6.03	34.50	41.00	40.73	54.00	13.27	Average
2389.800	28.18	6.03	34.50	40.84	40.56	54.00	13.44	Average
@ 2408.850	28.15	6.06	34.50	88.06	87.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

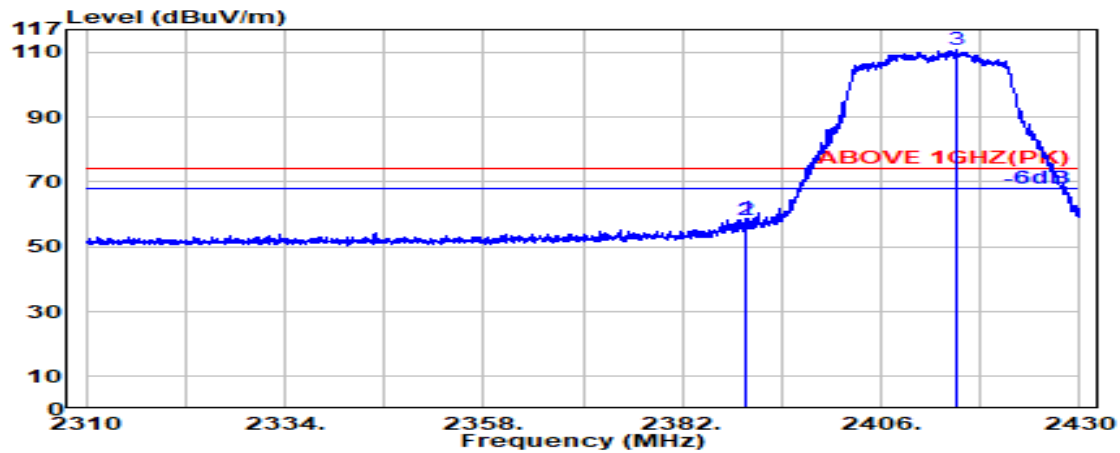

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	58.79	58.51	74.00	15.49	Peak
2389.800	28.18	6.03	34.50	58.71	58.43	74.00	15.57	Peak
@ 2415.050	28.19	6.07	34.50	111.00	110.76	---	---	Peak

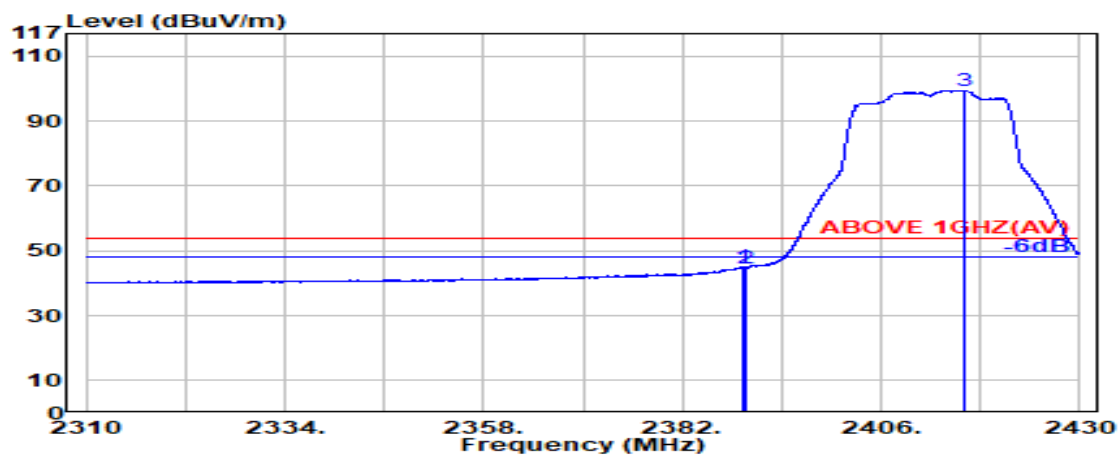

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	45.28	45.00	54.00	9.00	Average
2389.800	28.18	6.03	34.50	45.05	44.77	54.00	9.23	Average
@ 2416.050	28.20	6.07	34.50	99.78	99.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

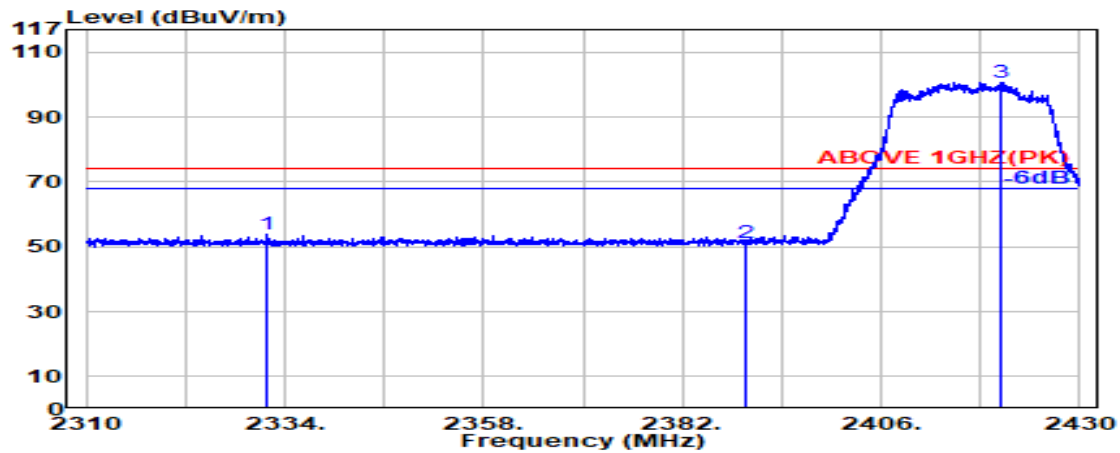

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2331.800	28.36	5.95	34.49	53.86	53.68	74.00	20.32	Peak
2389.800	28.18	6.03	34.50	51.34	51.06	74.00	22.94	Peak
@ 2420.350	28.22	6.08	34.50	100.88	100.68	---	---	Peak

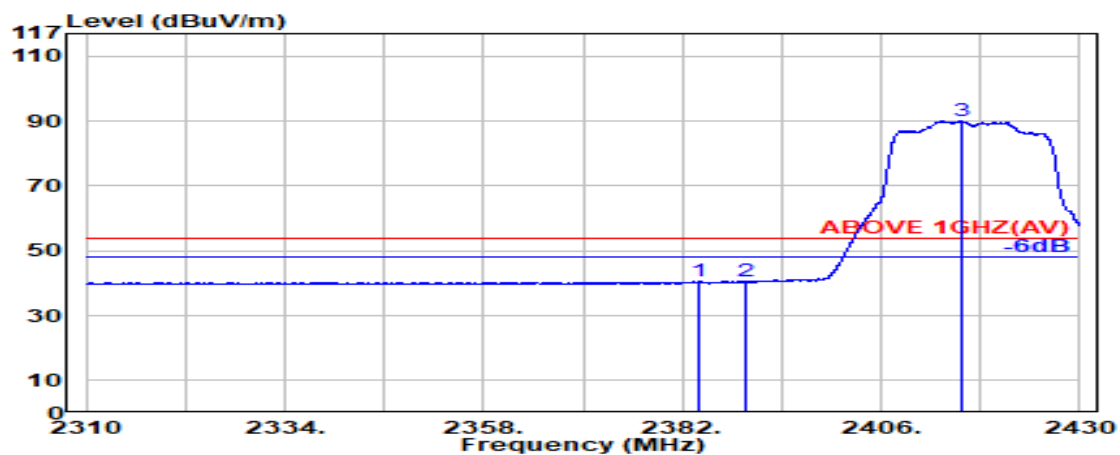

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.100	28.23	6.03	34.50	40.83	40.58	54.00	13.42	Average
2389.800	28.18	6.03	34.50	40.93	40.65	54.00	13.35	Average
@ 2415.700	28.19	6.07	34.50	90.33	90.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

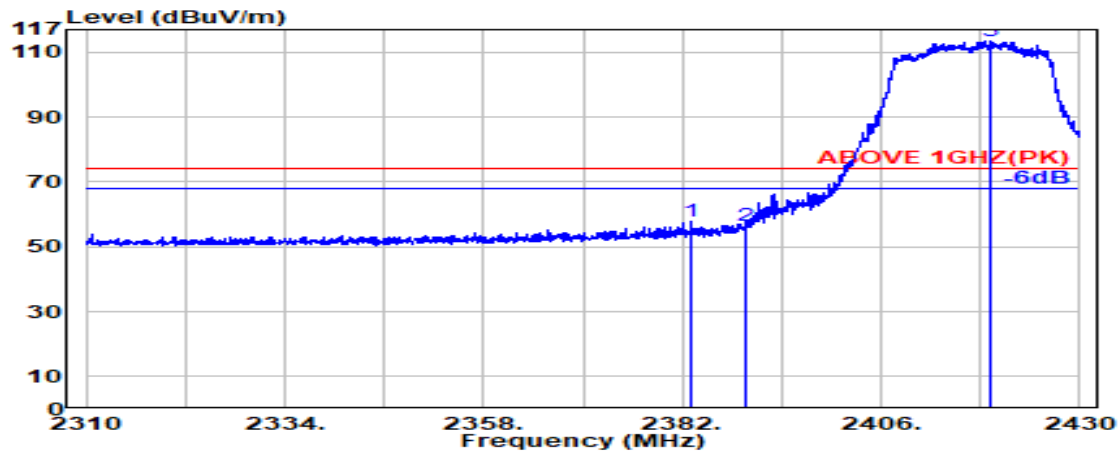

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.050	28.23	6.02	34.50	58.03	57.79	74.00	16.21	Peak
2389.800	28.18	6.03	34.50	56.77	56.49	74.00	17.51	Peak
@ 2419.300	28.22	6.08	34.50	113.57	113.36	---	---	Peak

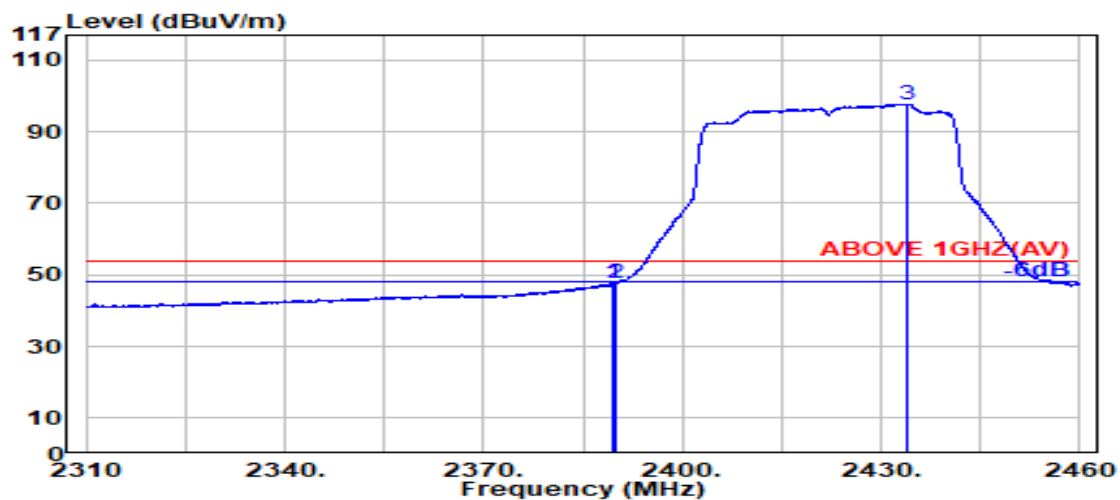

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	44.77	44.49	54.00	9.51	Average
2389.800	28.18	6.03	34.50	44.80	44.52	54.00	9.48	Average
@ 2421.250	28.23	6.08	34.50	102.47	102.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

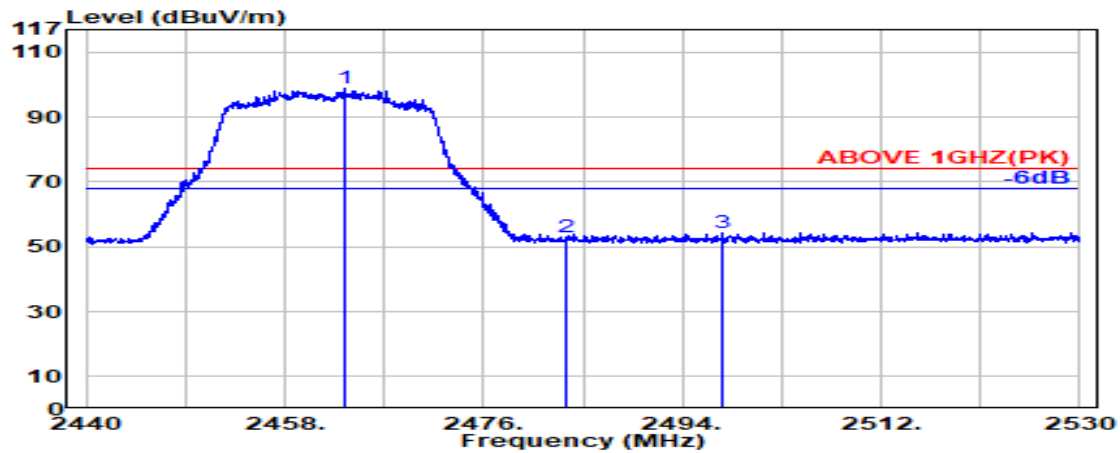

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.400	28.43	6.14	34.51	98.88	98.93	---	---	Peak
	2483.500	28.47	6.17	34.52	52.67	52.79	74.00	21.21	Peak
	2497.650	28.50	6.19	34.52	54.31	54.47	74.00	19.53	Peak

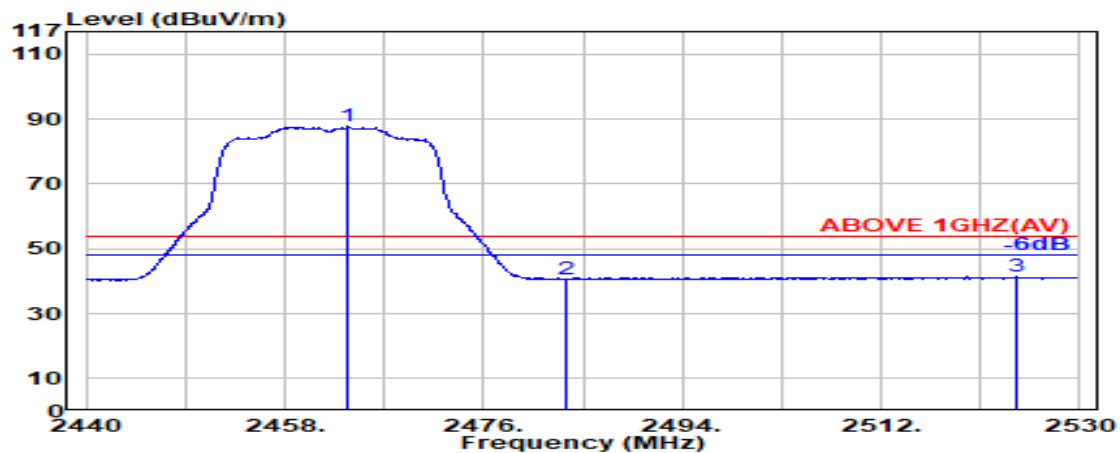

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.750	28.43	6.14	34.51	87.60	87.66	---	---	Peak
	2483.500	28.47	6.17	34.52	40.59	40.71	54.00	13.29	Peak
	2524.350	28.65	6.22	34.53	41.06	41.40	54.00	12.60	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

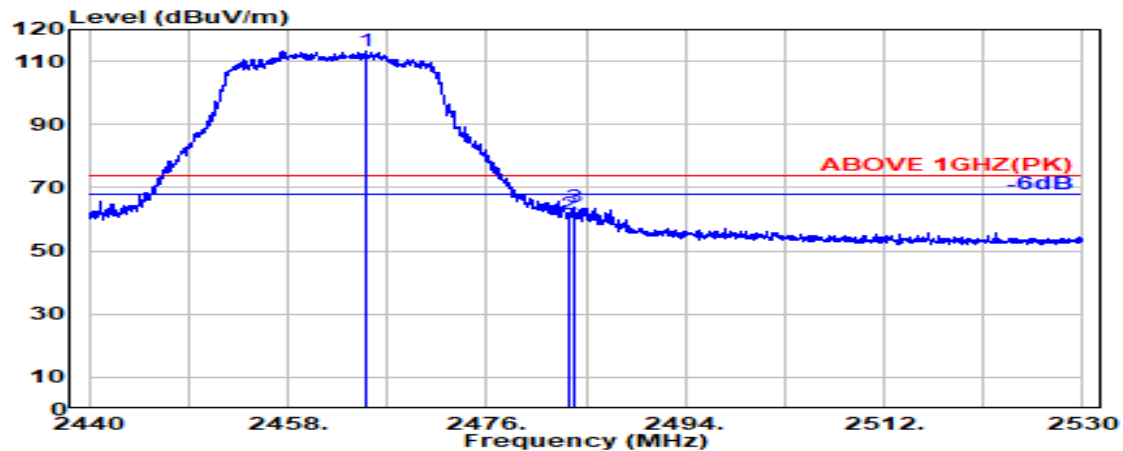

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.050	28.43	6.14	34.51	113.20	113.26	---	---	Peak
	2483.500	28.47	6.17	34.52	61.66	61.77	74.00	12.23	Peak
	2483.950	28.47	6.17	34.52	63.90	64.01	74.00	9.99	Peak

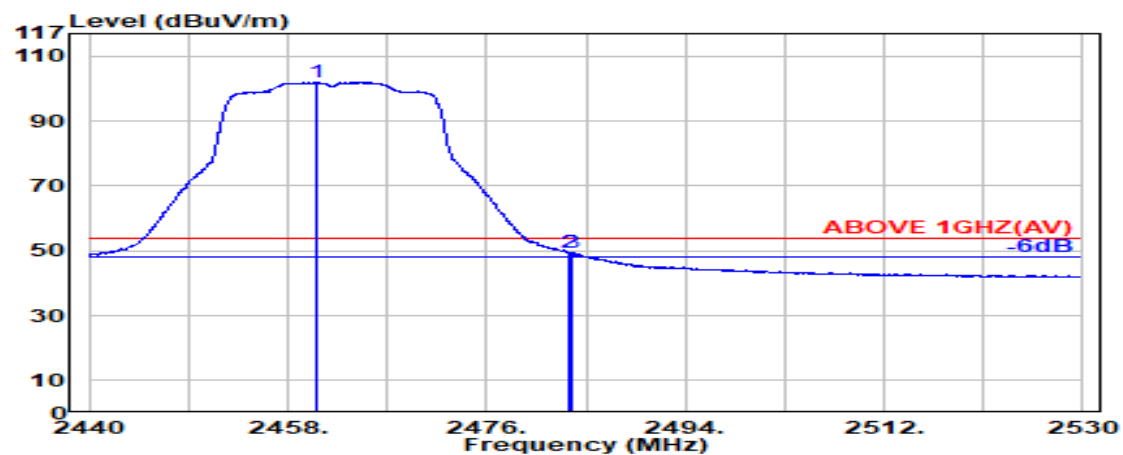

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.600	28.42	6.14	34.51	102.01	102.06	---	---	Average
	2483.500	28.47	6.17	34.52	49.29	49.41	54.00	4.59	Average
	2483.750	28.47	6.17	34.52	49.18	49.30	54.00	4.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

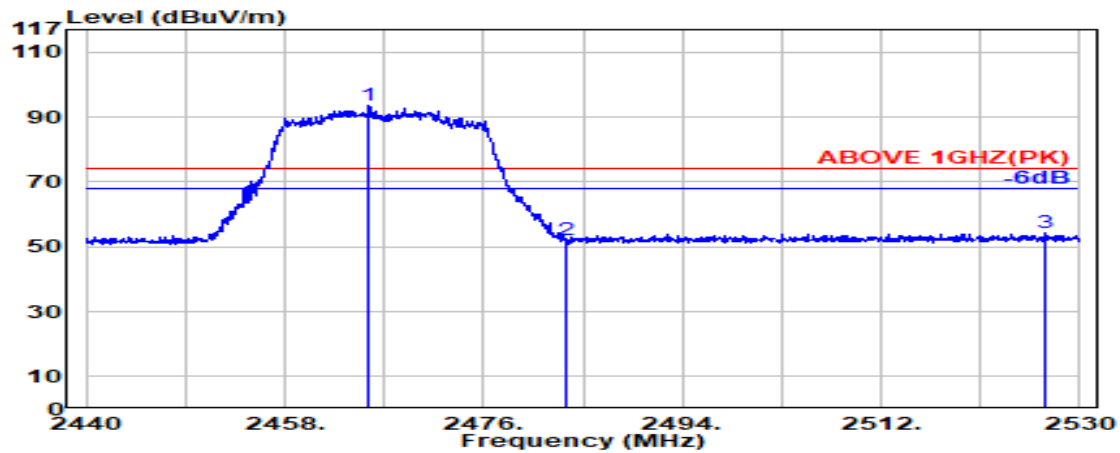

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.500	28.43	6.14	34.51	93.45	93.51	---	---	Peak
	2483.500	28.47	6.17	34.52	51.90	52.02	74.00	21.98	Peak
	2526.950	28.66	6.22	34.53	53.84	54.20	74.00	19.80	Peak

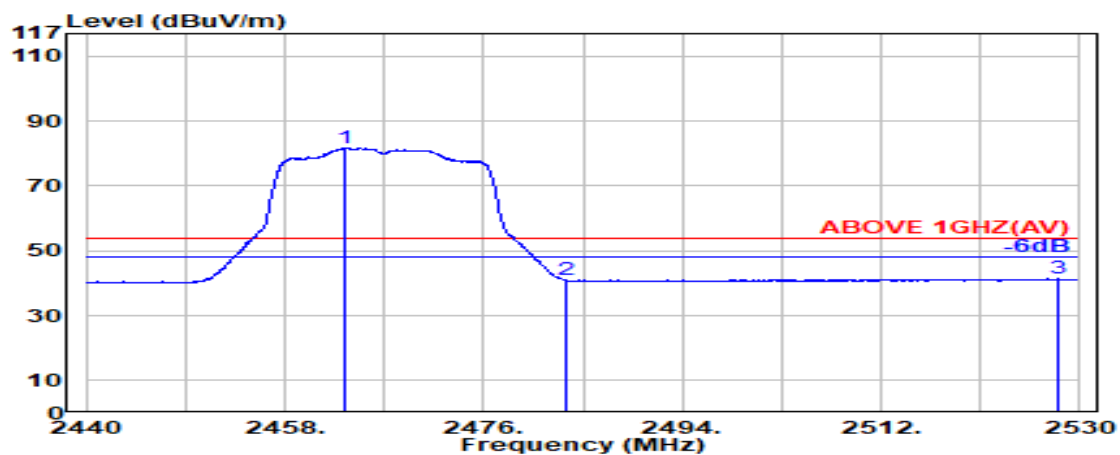

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.450	28.43	6.14	34.51	81.81	81.86	---	---	Peak
	2483.500	28.47	6.17	34.52	40.84	40.96	54.00	13.04	Peak
	2528.050	28.67	6.22	34.53	40.97	41.33	54.00	12.67	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

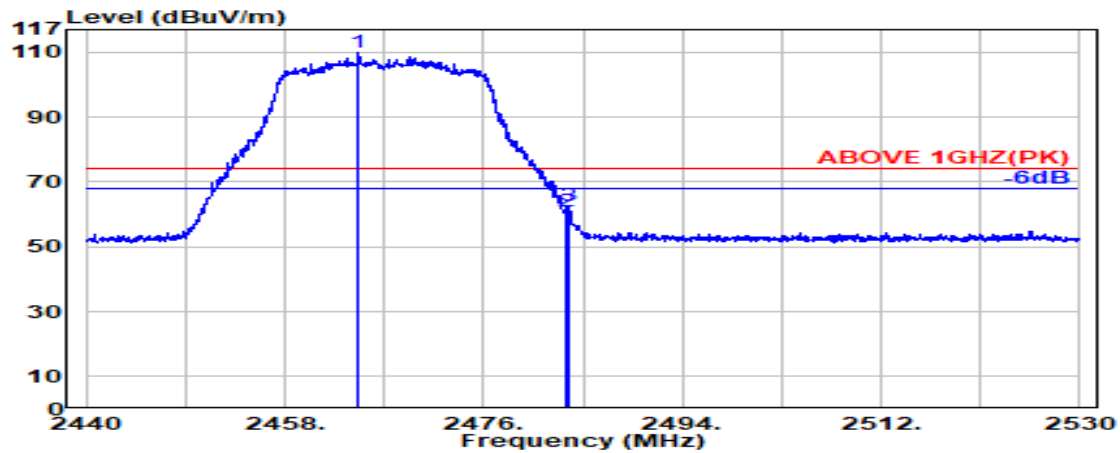

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.700	28.43	6.14	34.51	109.68	109.74	---	---	Peak
	2483.500	28.47	6.17	34.52	60.98	61.09	74.00	12.91	Peak
	2483.800	28.47	6.17	34.52	62.77	62.89	74.00	11.11	Peak

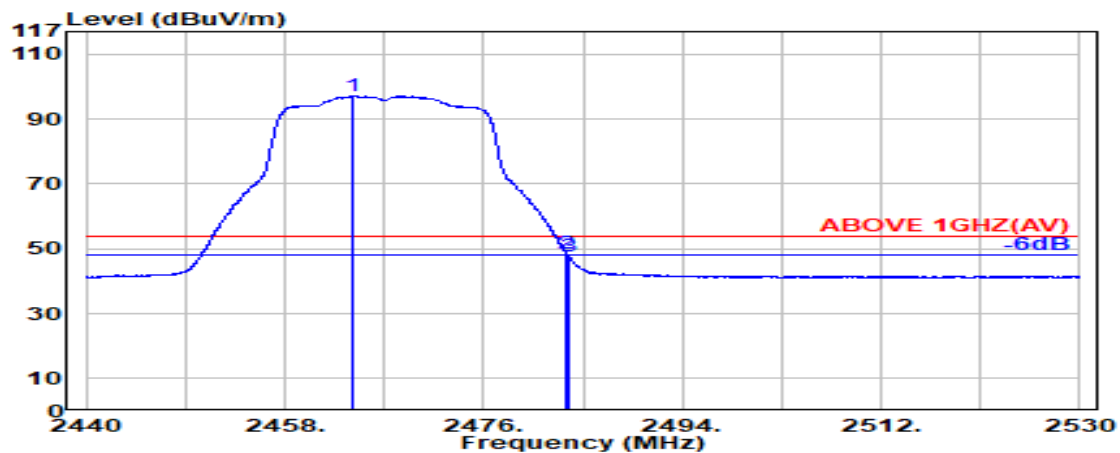

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.250	28.43	6.14	34.51	97.02	97.07	---	---	Average
	2483.500	28.47	6.17	34.52	48.55	48.66	54.00	5.34	Average
	2483.700	28.47	6.17	34.52	47.60	47.72	54.00	6.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------



Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.500	28.44	6.15	34.51	91.30	91.37	---	---	Peak
	2483.500	28.47	6.17	34.52	53.15	53.27	74.00	20.73	Peak
	2499.550	28.50	6.19	34.52	54.57	54.73	74.00	19.27	Peak

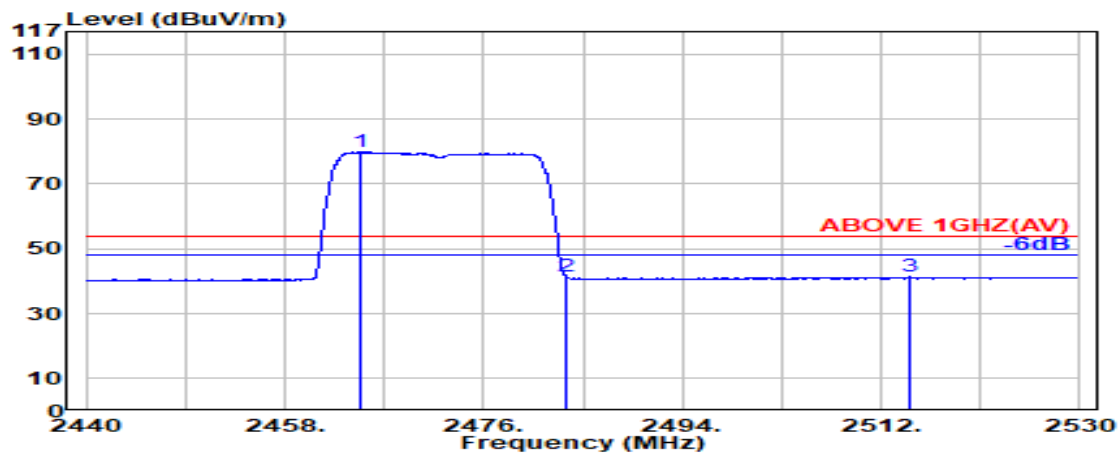

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.950	28.43	6.14	34.51	79.94	80.00	---	---	Peak
	2483.500	28.47	6.17	34.52	41.23	41.34	54.00	12.66	Peak
	2514.500	28.59	6.21	34.52	41.03	41.31	54.00	12.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

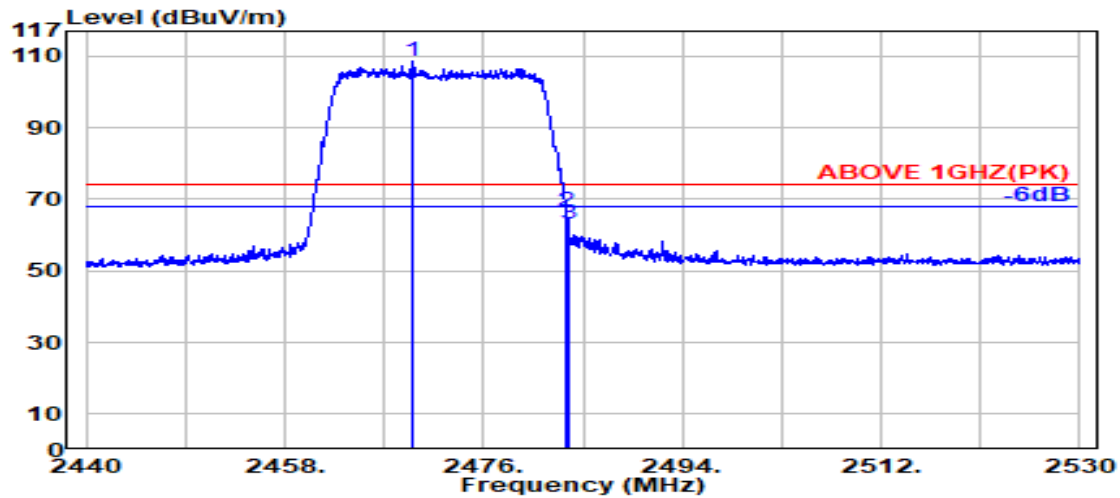

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.44	6.15	34.51	108.49	108.56	---	---	Peak
2483.500	28.47	6.17	34.52	66.48	66.59	74.00	7.41	Peak
2483.700	28.47	6.17	34.52	63.14	63.26	74.00	10.74	Peak

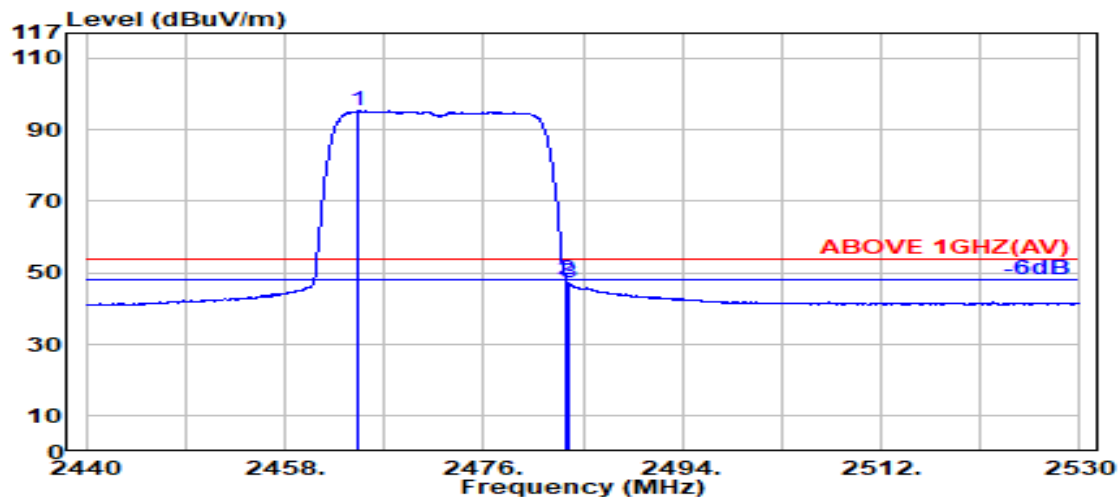

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.550	28.43	6.14	34.51	95.14	95.19	---	---	Average
2483.500	28.47	6.17	34.52	47.88	48.00	54.00	6.00	Average
2483.700	28.47	6.17	34.52	47.03	47.15	54.00	6.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240538

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

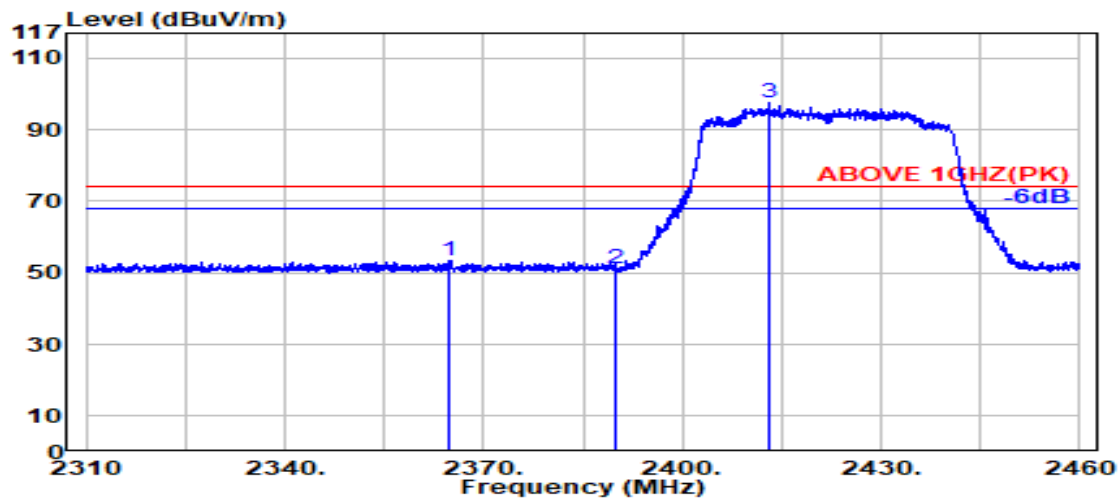

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2364.950	28.38	6.00	34.49	53.64	53.53	74.00	20.47	Peak
2389.800	28.18	6.03	34.50	51.37	51.09	74.00	22.91	Peak
@ 2413.100	28.18	6.07	34.50	97.77	97.52	---	---	Peak

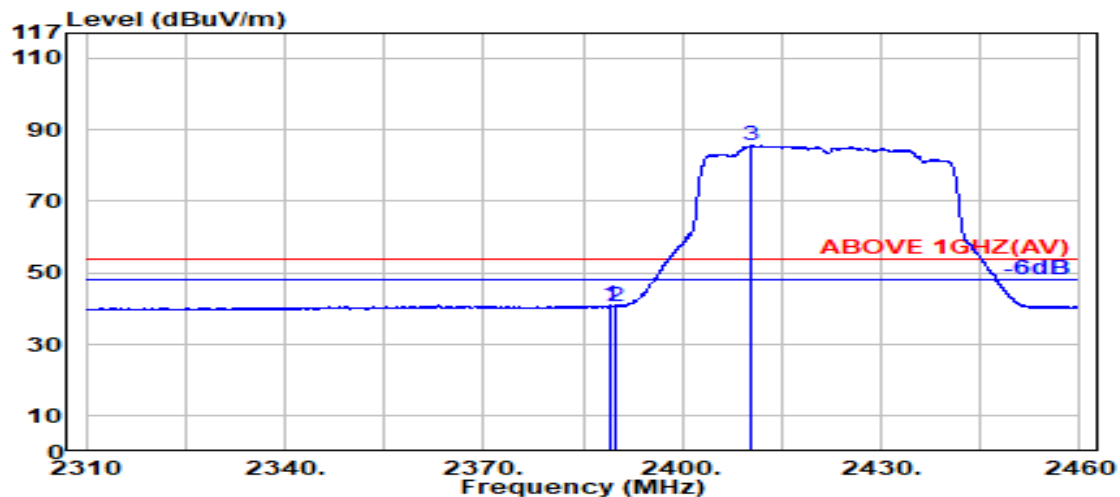

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	41.25	40.97	54.00	13.03	Average
2389.800	28.18	6.03	34.50	40.95	40.67	54.00	13.33	Average
@ 2410.300	28.16	6.06	34.50	85.94	85.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240538

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

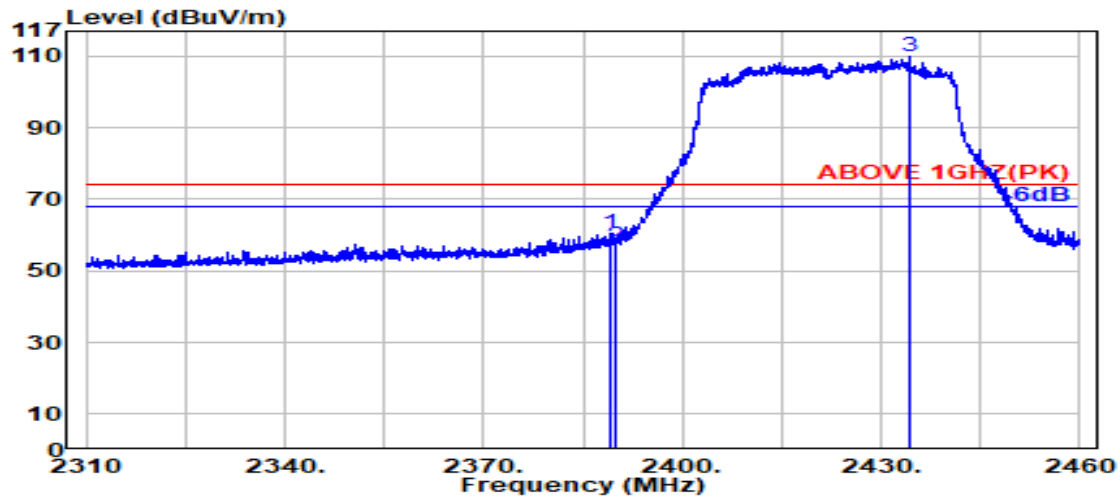

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	60.60	60.32	74.00	13.68	Peak
2389.800	28.18	6.03	34.50	57.25	56.97	74.00	17.03	Peak
@ 2434.200	28.31	6.10	34.51	110.05	109.94	---	---	Peak

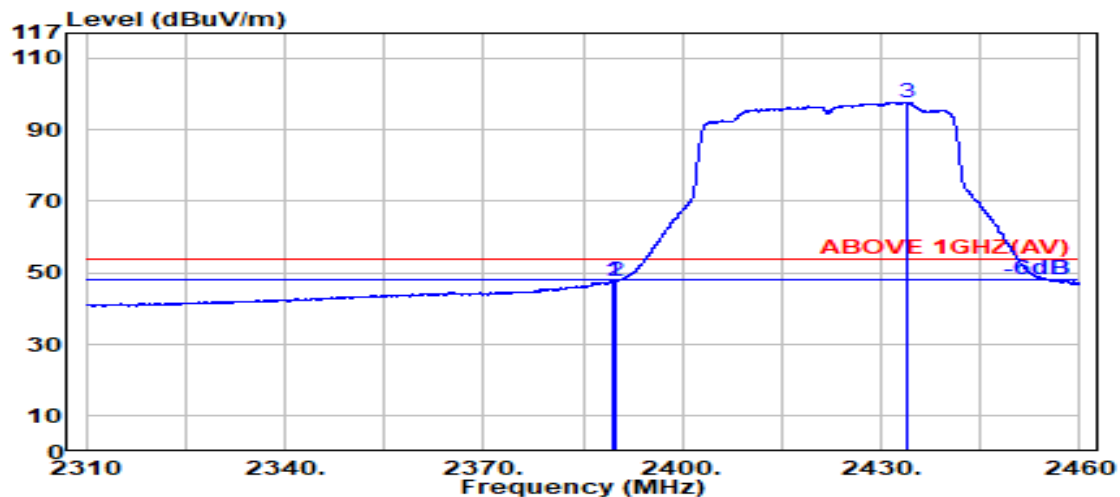

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	47.88	47.60	54.00	6.40	Average
2389.800	28.18	6.03	34.50	48.06	47.78	54.00	6.22	Average
@ 2433.800	28.30	6.10	34.51	97.89	97.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240538


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

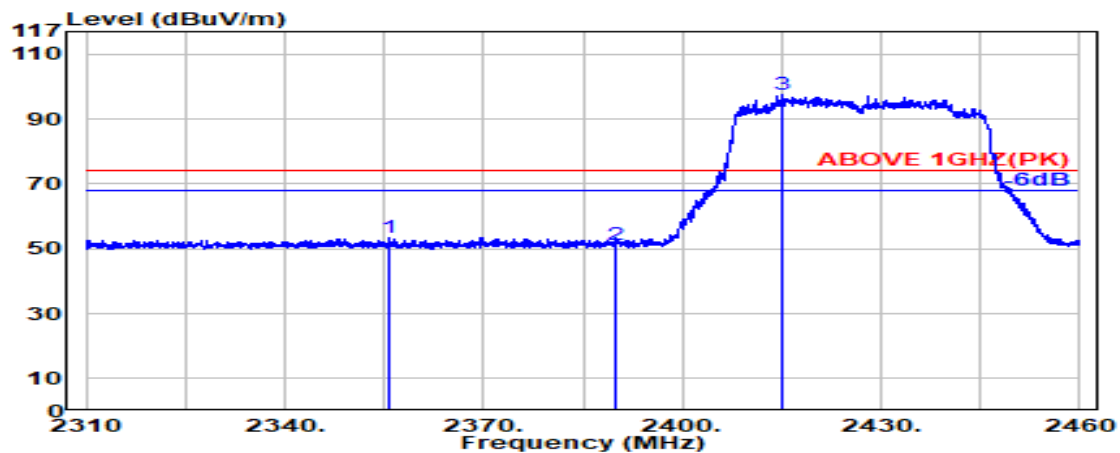

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.600	28.45	5.98	34.49	53.63	53.58	74.00	20.42	Peak
2389.800	28.18	6.03	34.50	51.29	51.01	74.00	22.99	Peak
@ 2415.200	28.19	6.07	34.50	97.77	97.53	---	---	Peak

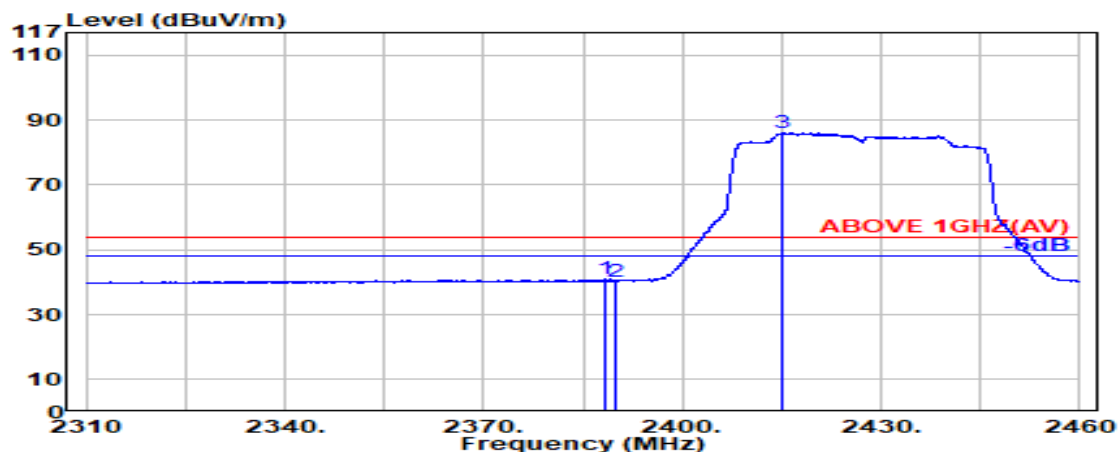

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.19	6.03	34.50	41.13	40.86	54.00	13.14	Average
2389.800	28.18	6.03	34.50	40.59	40.31	54.00	13.69	Average
@ 2415.050	28.19	6.07	34.50	86.37	86.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

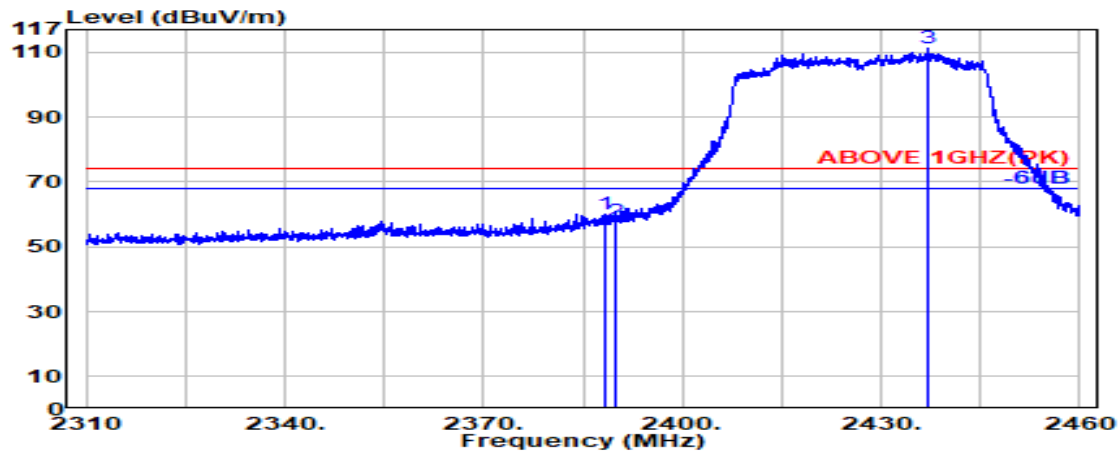

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.300	28.19	6.03	34.50	60.28	60.01	74.00	13.99	Peak
2389.800	28.18	6.03	34.50	58.19	57.91	74.00	16.09	Peak
@ 2436.950	28.32	6.10	34.51	111.20	111.12	---	---	Peak

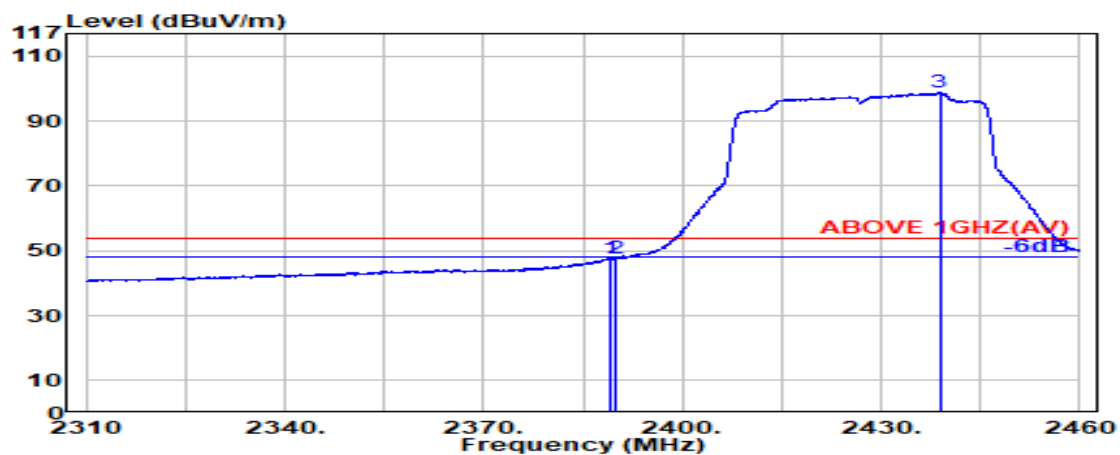

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	47.92	47.64	54.00	6.36	Average
2389.800	28.18	6.03	34.50	47.80	47.51	54.00	6.49	Average
@ 2438.850	28.33	6.10	34.51	98.85	98.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

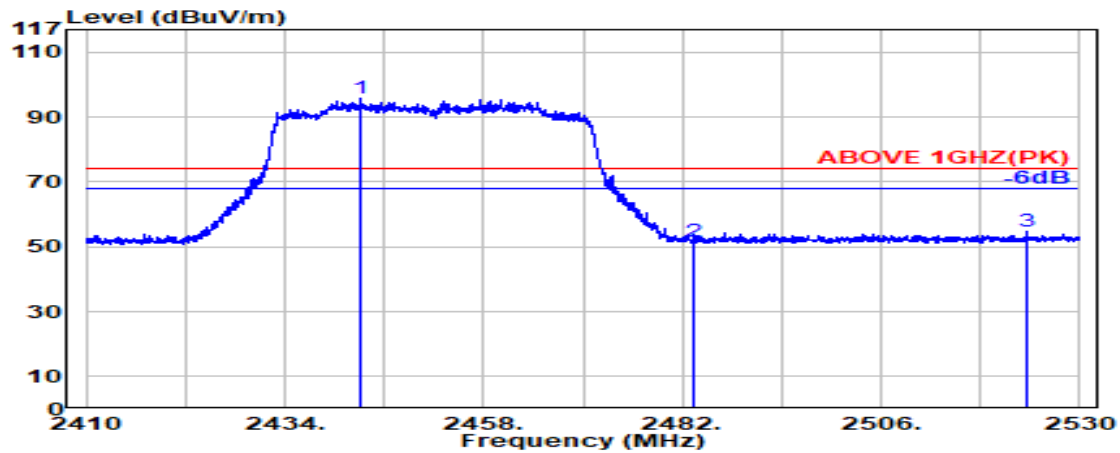

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2443.200	28.36	6.11	34.51	96.03	95.99	---	---	Peak
	2483.500	28.47	6.17	34.52	51.39	51.51	74.00	22.49	Peak
	2523.650	28.64	6.22	34.53	54.21	54.55	74.00	19.45	Peak

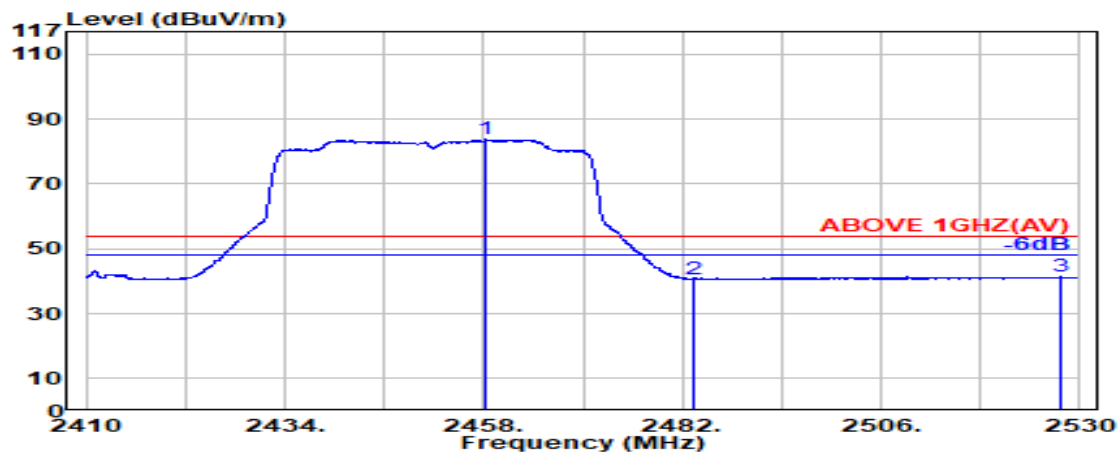

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.350	28.42	6.13	34.51	83.68	83.72	---	---	Average
	2483.500	28.47	6.17	34.52	40.58	40.70	54.00	13.30	Average
	2527.650	28.67	6.22	34.53	41.07	41.43	54.00	12.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

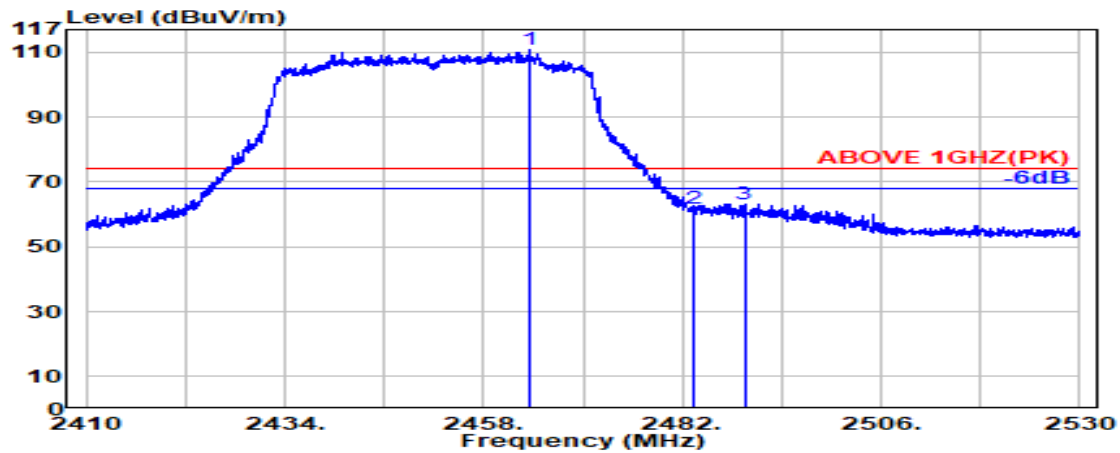

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.650	28.43	6.14	34.51	110.66	110.72	---	---	Peak
	2483.500	28.47	6.17	34.52	61.85	61.97	74.00	12.03	Peak
	2489.500	28.48	6.18	34.52	63.15	63.29	74.00	10.71	Peak

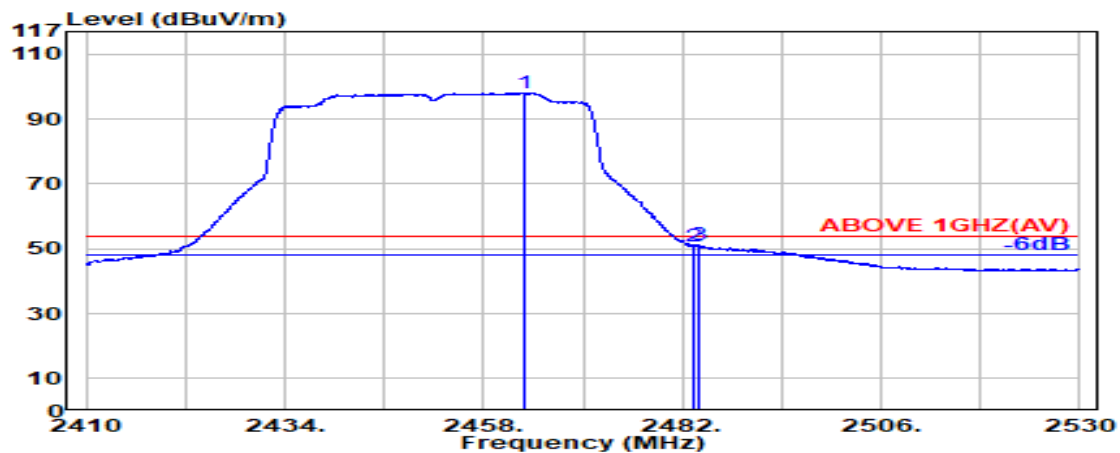


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.050	28.43	6.14	34.51	98.03	98.08	---	---	Average
	2483.500	28.47	6.17	34.52	50.86	50.98	54.00	3.02	Average
	2483.850	28.47	6.17	34.52	50.91	51.03	54.00	2.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

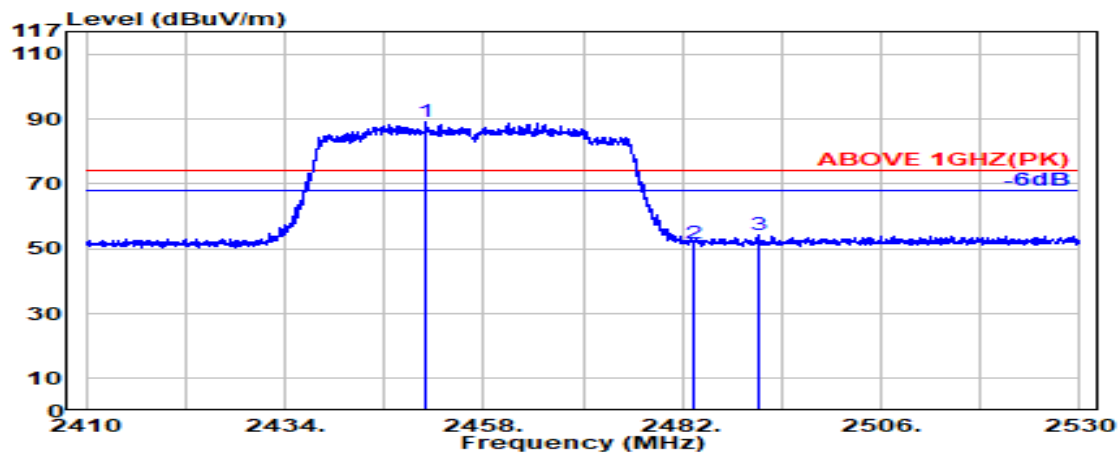

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.900	28.40	6.12	34.51	89.39	89.40	---	---	Peak
	2483.500	28.47	6.17	34.52	51.56	51.67	74.00	22.33	Peak
	2491.200	28.48	6.18	34.52	54.09	54.23	74.00	19.77	Peak

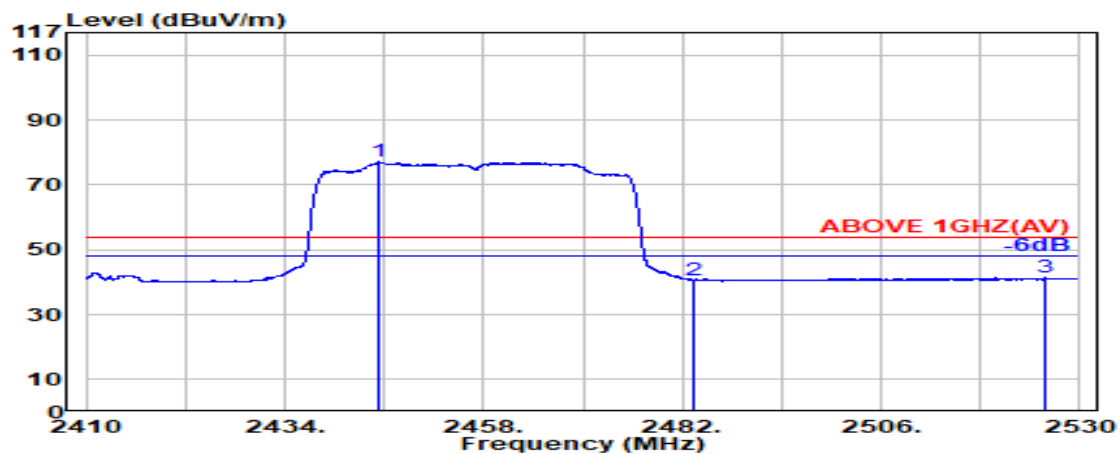

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.450	28.37	6.11	34.51	77.08	77.06	---	---	Average
	2483.500	28.47	6.17	34.52	40.60	40.71	54.00	13.29	Average
	2525.850	28.66	6.22	34.53	40.96	41.31	54.00	12.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

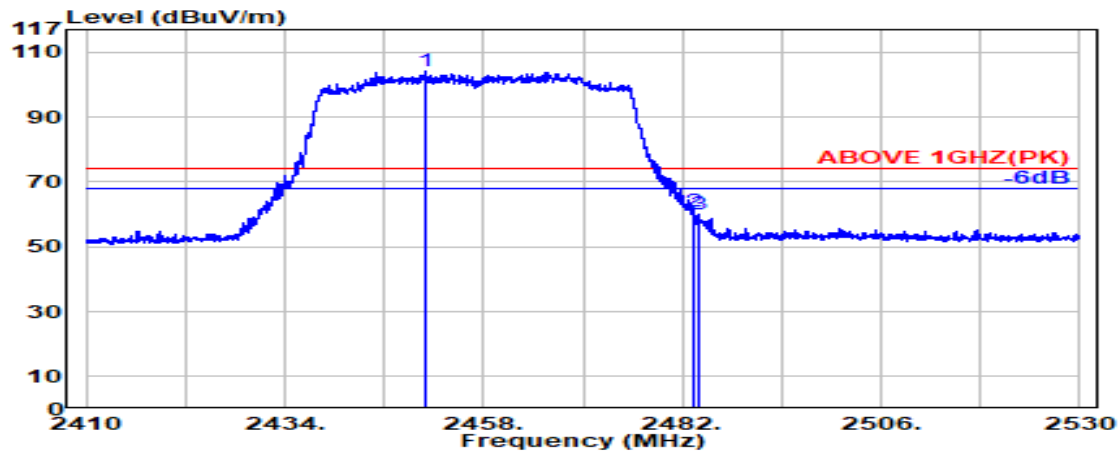

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.850	28.40	6.12	34.51	104.01	104.02	---	---	Peak
	2483.500	28.47	6.17	34.52	60.61	60.72	74.00	13.28	Peak
	2483.900	28.47	6.17	34.52	59.92	60.04	74.00	13.96	Peak

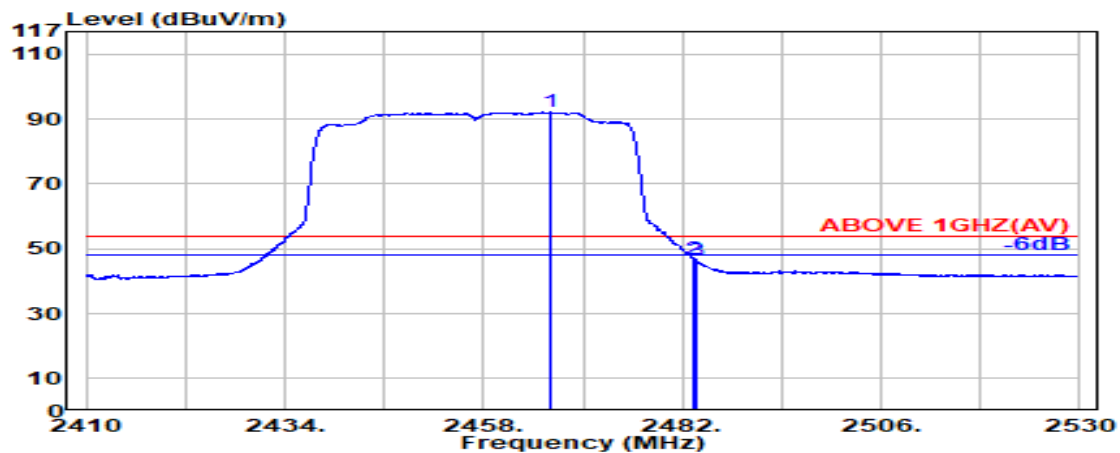

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.000	28.43	6.14	34.51	92.15	92.21	---	---	Average
	2483.500	28.47	6.17	34.52	46.57	46.69	54.00	7.31	Average
	2483.700	28.47	6.17	34.52	46.36	46.48	54.00	7.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

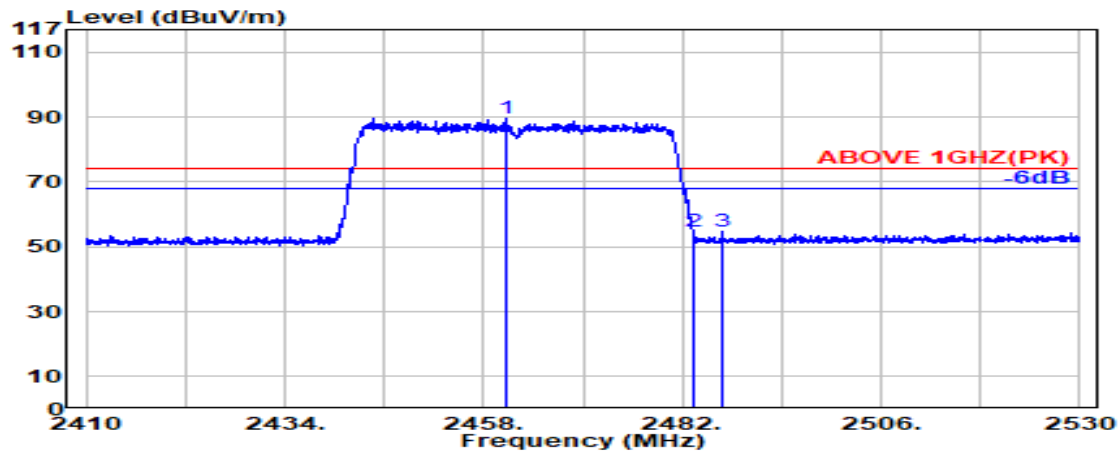

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.600	28.42	6.14	34.51	89.65	89.69	---	---	Peak
2483.500	28.47	6.17	34.52	54.53	54.65	74.00	19.35	Peak
2486.900	28.47	6.17	34.52	54.47	54.60	74.00	19.40	Peak

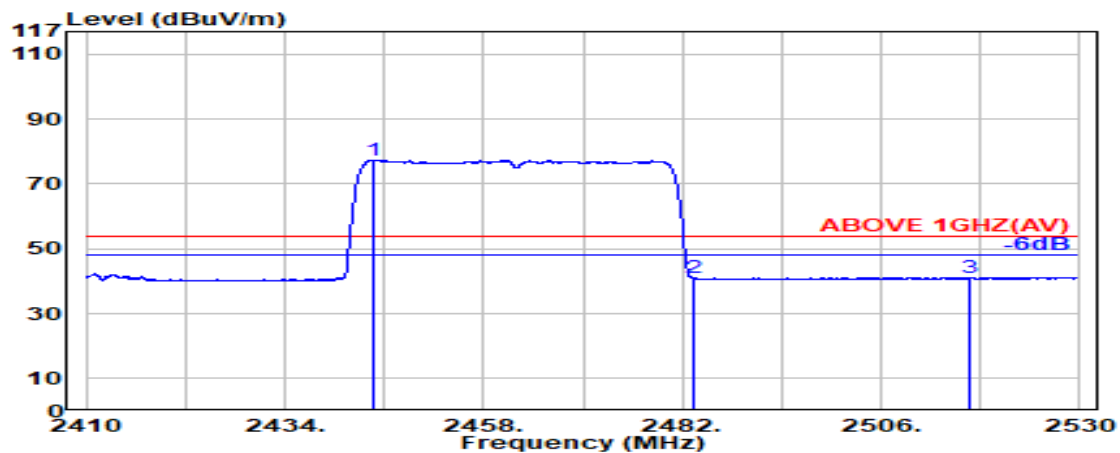

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.700	28.37	6.11	34.51	77.37	77.34	---	---	Peak
2483.500	28.47	6.17	34.52	40.85	40.97	54.00	13.03	Peak
2516.650	28.60	6.21	34.52	40.91	41.19	54.00	12.81	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

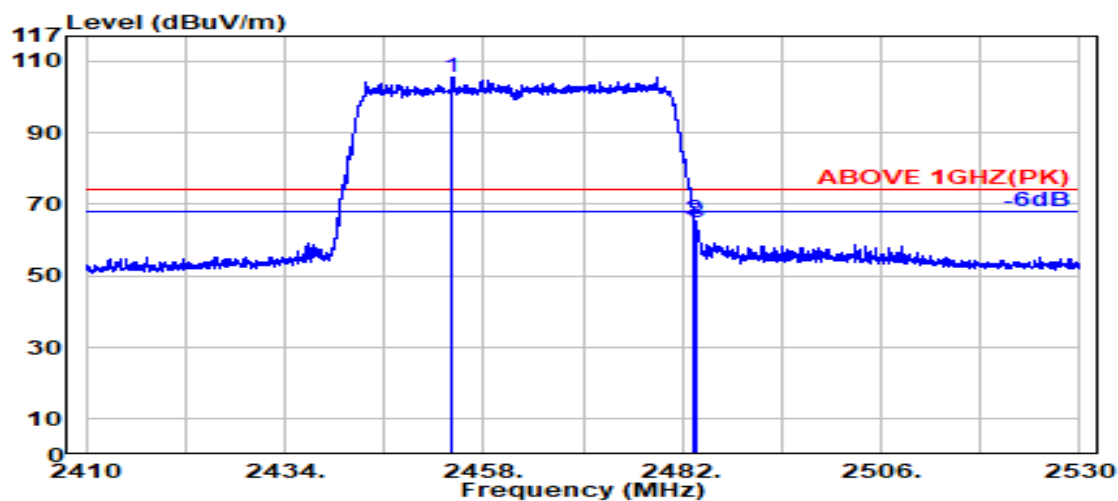

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.250	28.41	6.13	34.51	105.42	105.44	---	---	Peak
2483.500	28.47	6.17	34.52	65.57	65.69	74.00	8.31	Peak
2483.700	28.47	6.17	34.52	64.63	64.75	74.00	9.25	Peak

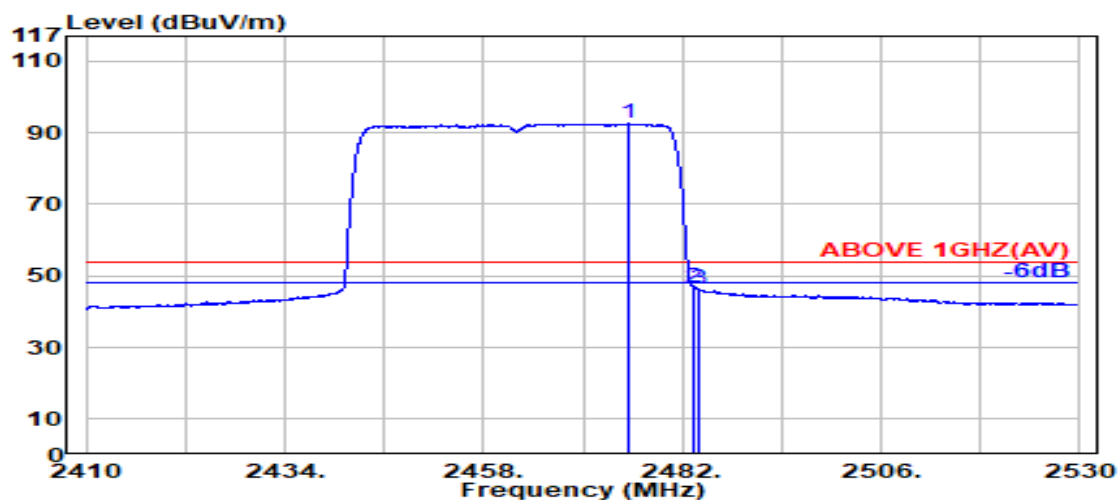

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.650	28.45	6.16	34.52	92.48	92.58	---	---	Average
2483.500	28.47	6.17	34.52	46.68	46.80	54.00	7.20	Average
2483.950	28.47	6.17	34.52	46.30	46.42	54.00	7.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240538

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

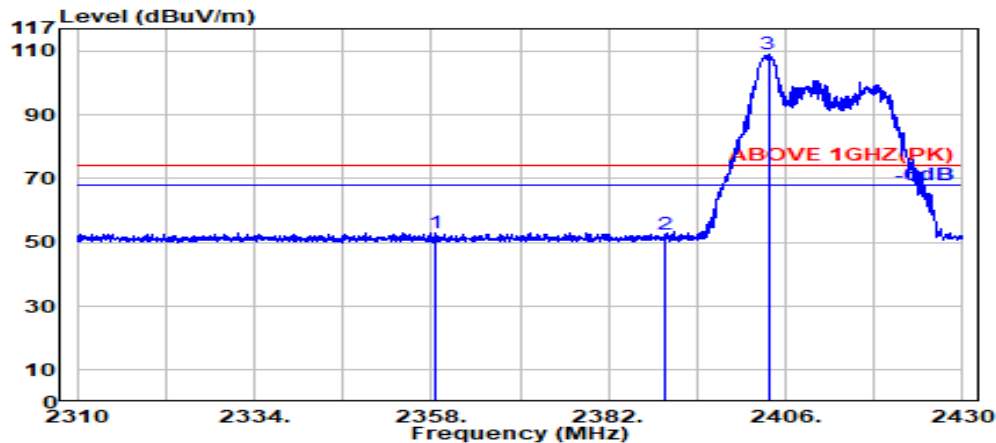

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.550	28.43	5.99	34.49	53.14	53.06	74.00	20.94	Peak
2389.800	28.18	6.03	34.50	52.66	52.38	74.00	21.62	Peak
@ 2403.650	28.12	6.05	34.50	109.25	108.93	---	---	Peak

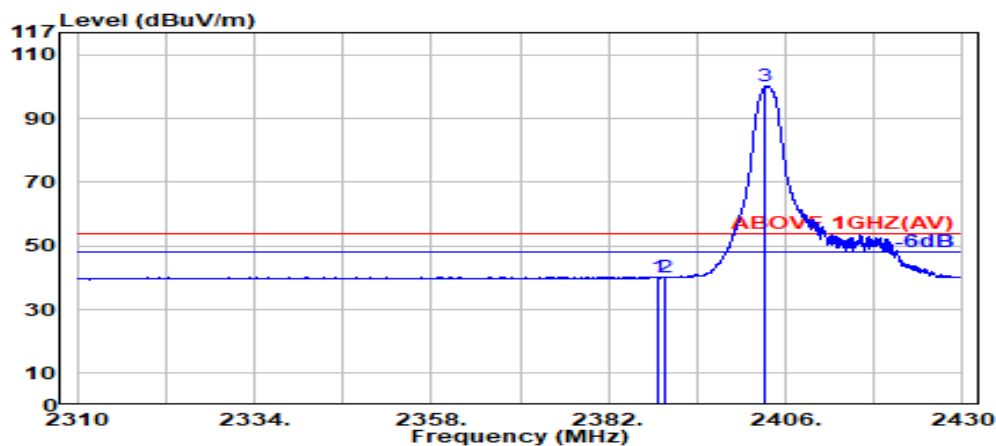

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.50	40.55	40.27	54.00	13.73	Average
2389.800	28.18	6.03	34.50	40.47	40.19	54.00	13.81	Average
@ 2403.200	28.12	6.05	34.50	100.47	100.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

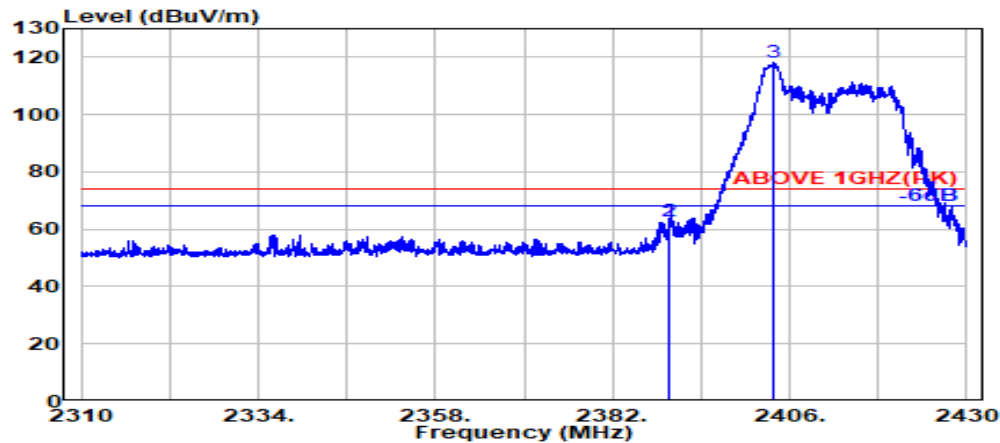

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	63.07	62.79	74.00	11.21	Peak
2389.800	28.18	6.03	34.50	63.15	62.87	74.00	11.13	Peak
@ 2403.800	28.12	6.05	34.50	118.56	118.23	---	---	Peak

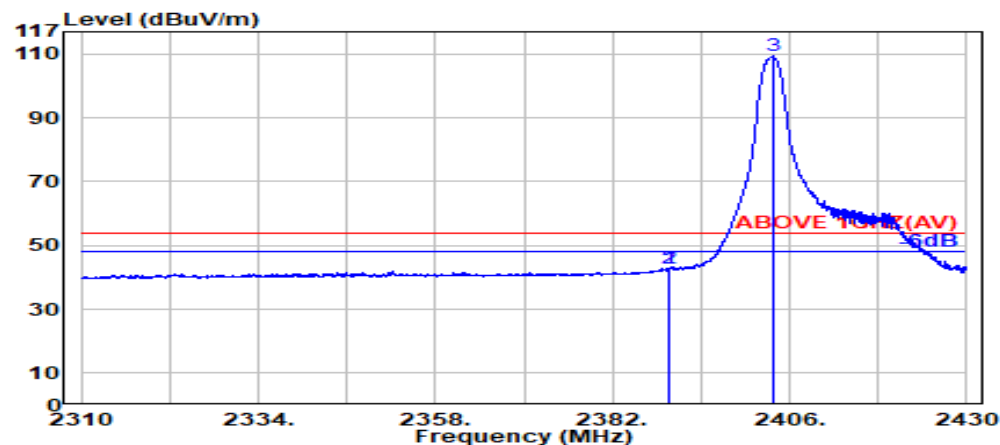

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	43.24	42.96	54.00	11.04	Average
2389.800	28.18	6.03	34.50	42.90	42.62	54.00	11.38	Average
@ 2403.850	28.12	6.05	34.50	109.73	109.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

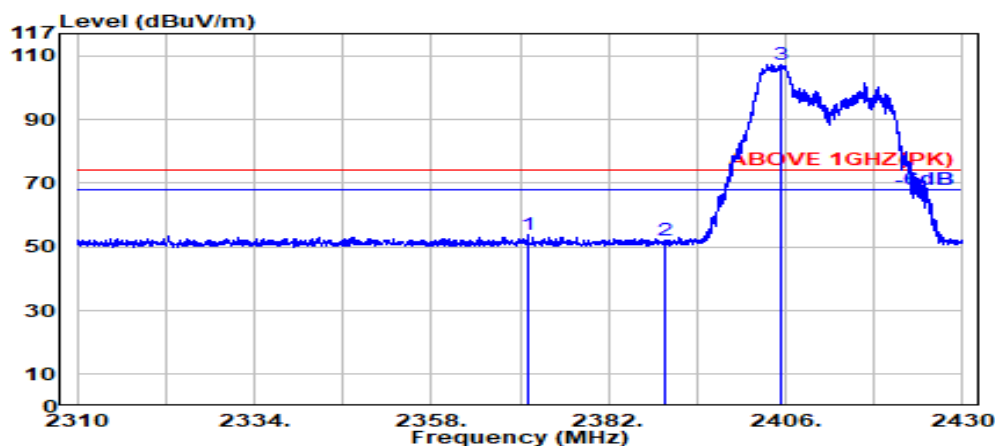

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2371.000	28.33	6.01	34.49	53.81	53.66	74.00	20.34	Peak
2389.800	28.18	6.03	34.50	52.19	51.91	74.00	22.09	Peak
@ 2405.250	28.13	6.06	34.50	107.59	107.27	---	---	Peak

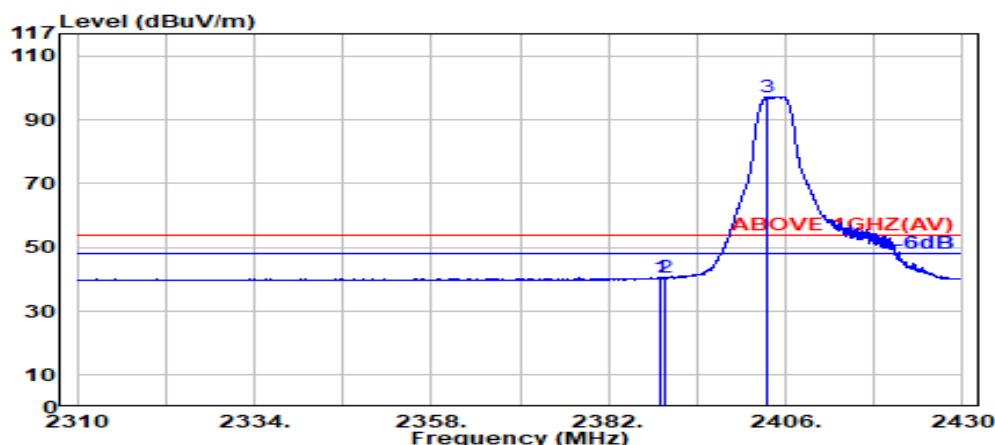

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.50	40.89	40.61	54.00	13.39	Average
2389.800	28.18	6.03	34.50	40.68	40.40	54.00	13.60	Average
@ 2403.400	28.12	6.05	34.50	97.53	97.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

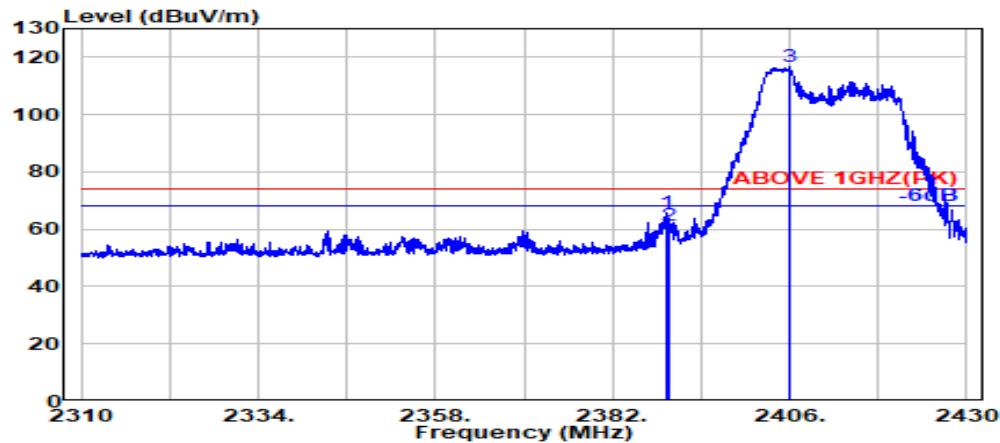

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	65.95	65.67	74.00	8.33	Peak
2389.800	28.18	6.03	34.50	61.66	61.37	74.00	12.63	Peak
@ 2406.100	28.14	6.06	34.50	117.02	116.72	---	---	Peak

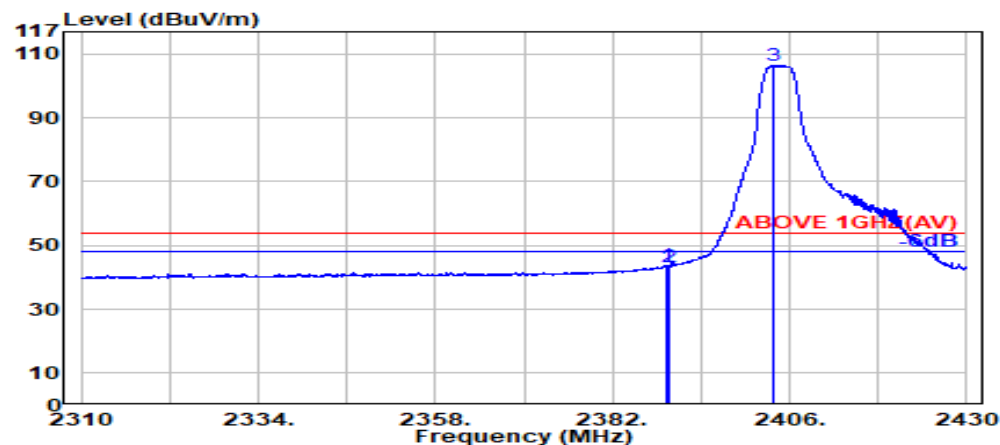

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	43.99	43.71	54.00	10.29	Average
2389.800	28.18	6.03	34.50	43.60	43.32	54.00	10.68	Average
@ 2403.800	28.12	6.05	34.50	106.85	106.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

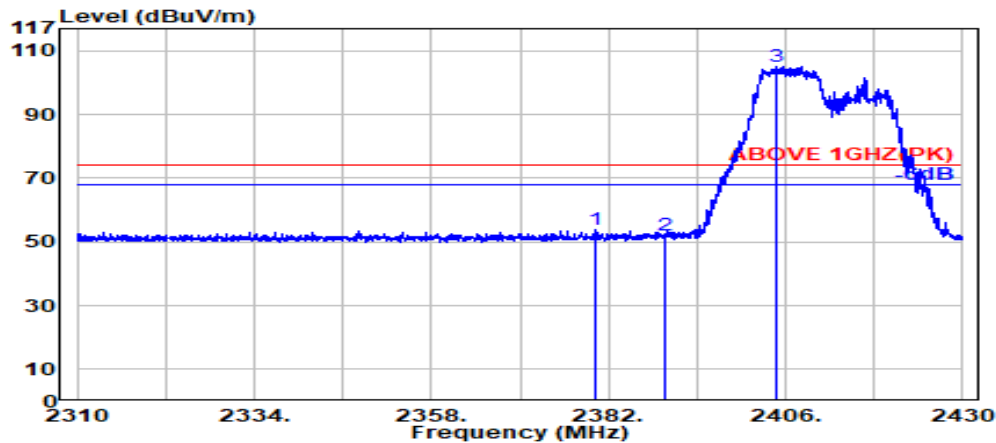

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.350	28.26	6.02	34.50	53.91	53.69	74.00	20.31	Peak
2389.800	28.18	6.03	34.50	52.34	52.06	74.00	21.94	Peak
@ 2404.650	28.13	6.06	34.50	105.40	105.09	---	---	Peak

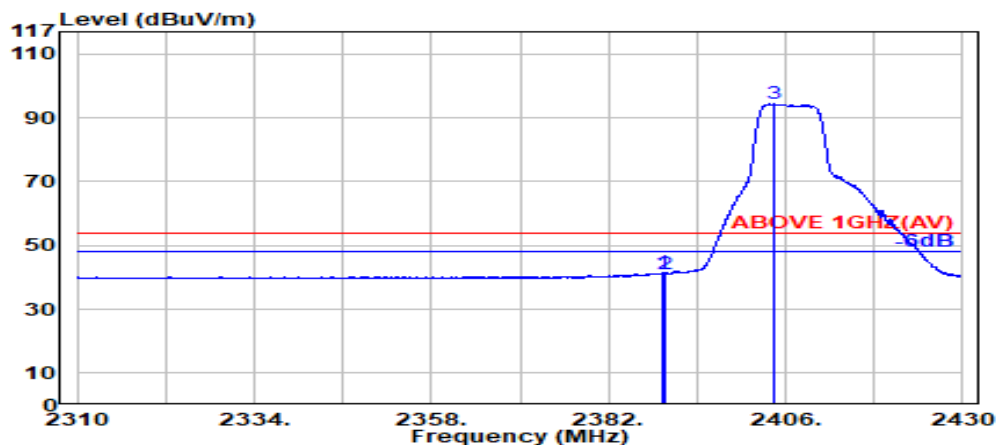


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	41.62	41.34	54.00	12.66	Average
2389.800	28.18	6.03	34.50	41.26	40.97	54.00	13.03	Average
@ 2404.350	28.13	6.06	34.50	94.82	94.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

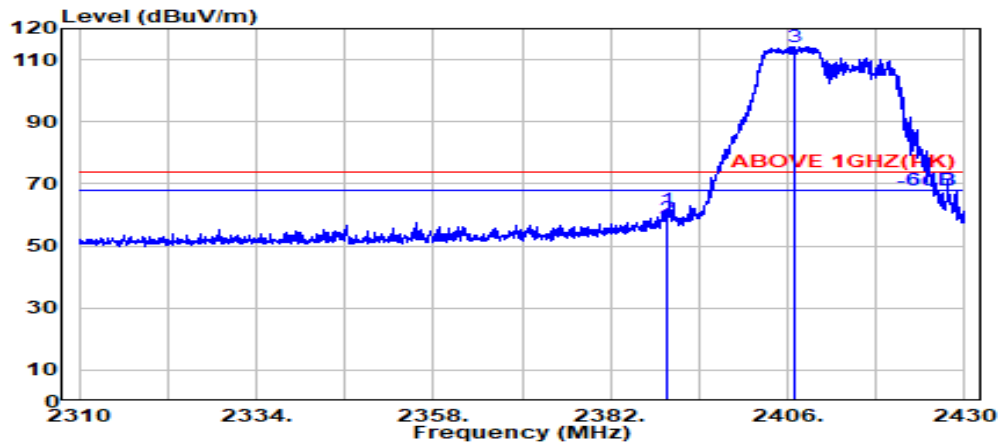

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	61.83	61.55	74.00	12.45	Peak
2389.800	28.18	6.03	34.50	59.32	59.04	74.00	14.96	Peak
@ 2407.050	28.14	6.06	34.50	114.52	114.22	---	---	Peak

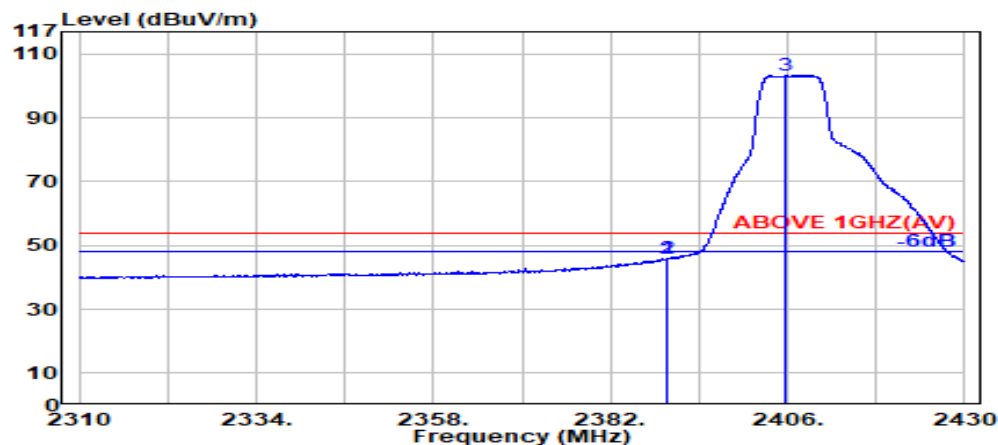

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	46.20	45.91	54.00	8.09	Average
2389.800	28.18	6.03	34.50	46.09	45.81	54.00	8.19	Average
@ 2405.700	28.13	6.06	34.50	103.70	103.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

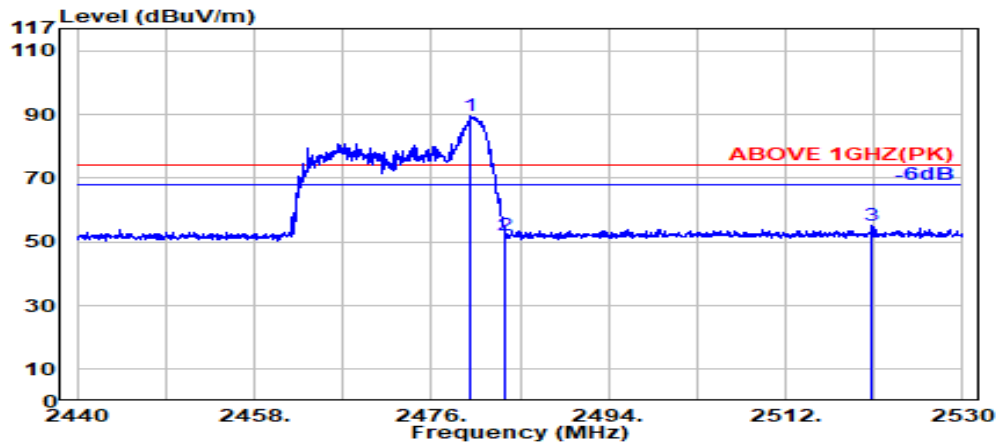

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	34.52	89.40	89.51	---	---	Peak
2483.500	28.47	6.17	34.52	51.92	52.04	74.00	21.96	Peak
2520.800	28.63	6.21	34.52	54.83	55.15	74.00	18.85	Peak

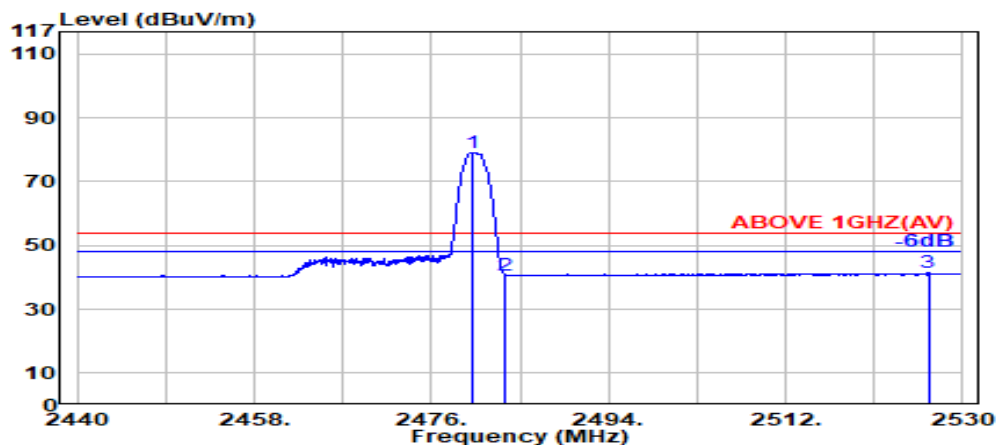

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	34.52	79.10	79.20	---	---	Average
2483.500	28.47	6.17	34.52	40.63	40.75	54.00	13.25	Average
2526.500	28.66	6.22	34.53	41.07	41.42	54.00	12.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

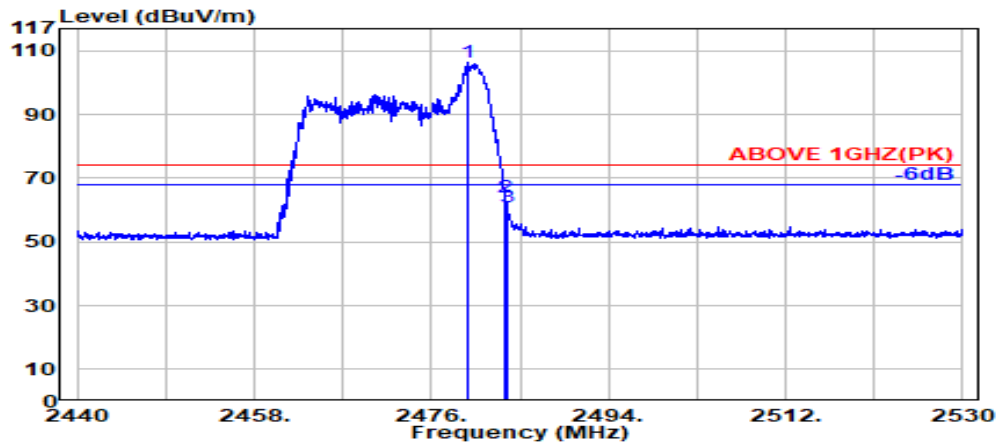

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.750	28.46	6.16	34.52	106.23	106.34	---	---	Peak
2483.500	28.47	6.17	34.52	63.93	64.05	74.00	9.95	Peak
2483.700	28.47	6.17	34.52	60.65	60.77	74.00	13.23	Peak

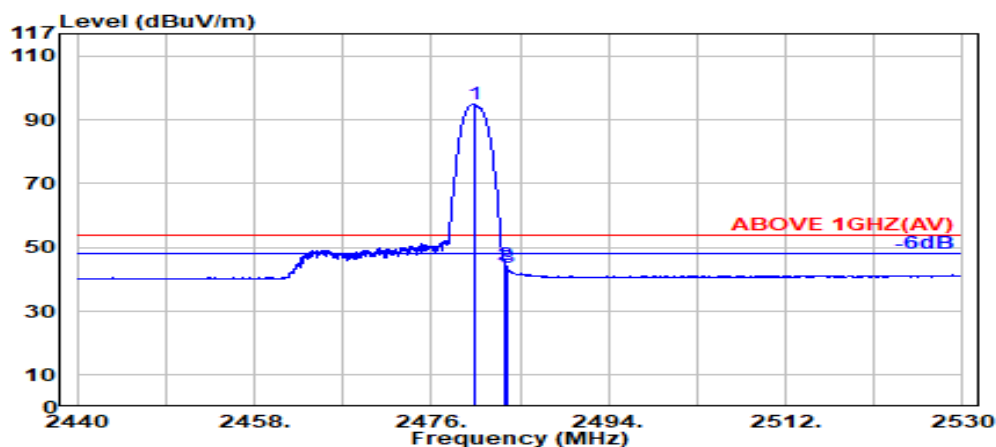

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.350	28.46	6.16	34.52	94.92	95.03	---	---	Average
2483.500	28.47	6.17	34.52	44.49	44.61	54.00	9.39	Average
2483.700	28.47	6.17	34.52	43.48	43.60	54.00	10.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

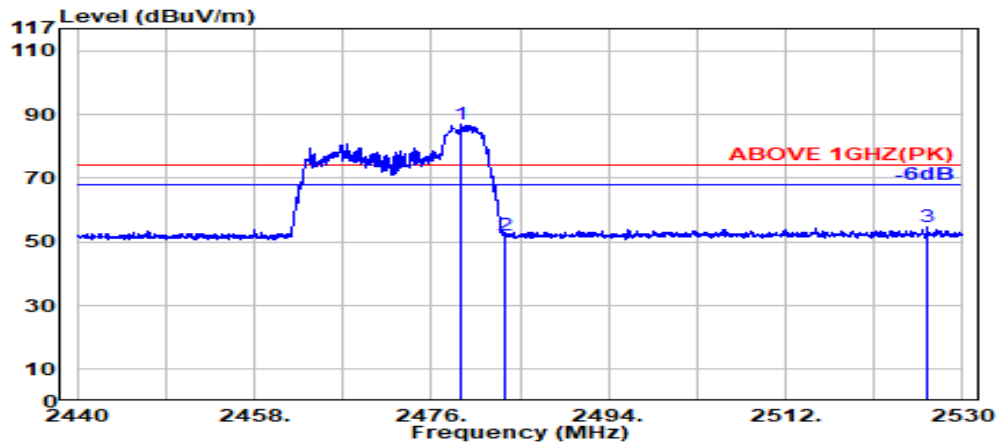

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.46	6.16	34.52	86.95	87.05	---	---	Peak
2483.500	28.47	6.17	34.52	52.02	52.13	74.00	21.87	Peak
2526.450	28.66	6.22	34.53	54.46	54.82	74.00	19.18	Peak

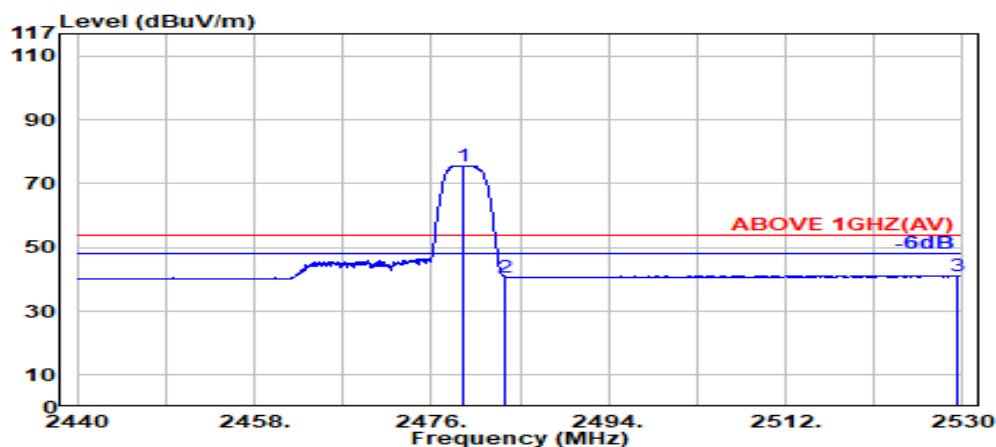

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.46	6.16	34.52	75.61	75.71	---	---	Average
2483.500	28.47	6.17	34.52	40.53	40.65	54.00	13.35	Average
2529.350	28.68	6.22	34.53	40.84	41.21	54.00	12.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

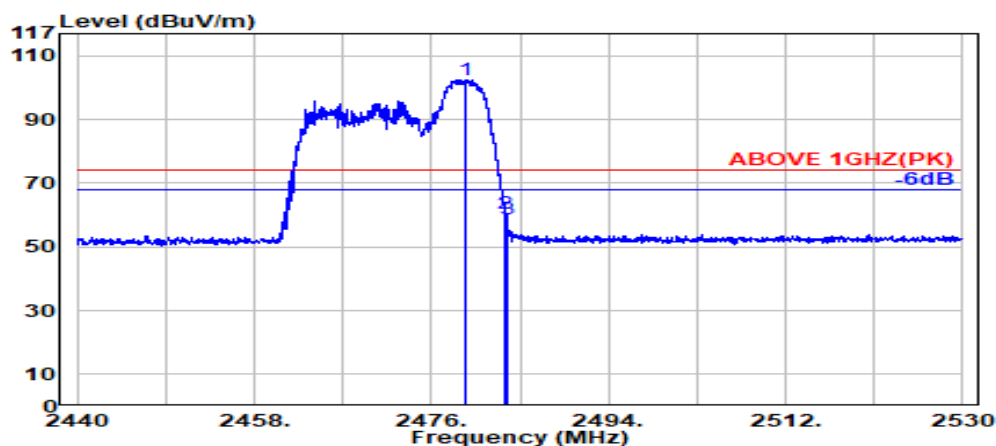

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.450	28.46	6.16	34.52	102.51	102.62	---	---	Peak
2483.500	28.47	6.17	34.52	60.37	60.49	74.00	13.51	Peak
2483.700	28.47	6.17	34.52	58.43	58.55	74.00	15.45	Peak

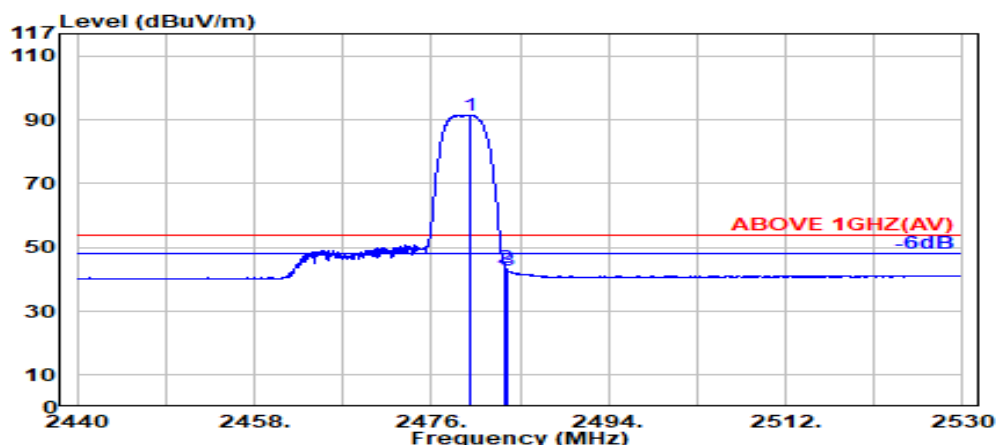

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.900	28.46	6.16	34.52	91.37	91.48	---	---	Average
2483.500	28.47	6.17	34.52	43.56	43.68	54.00	10.32	Average
2483.700	28.47	6.17	34.52	42.90	43.02	54.00	10.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

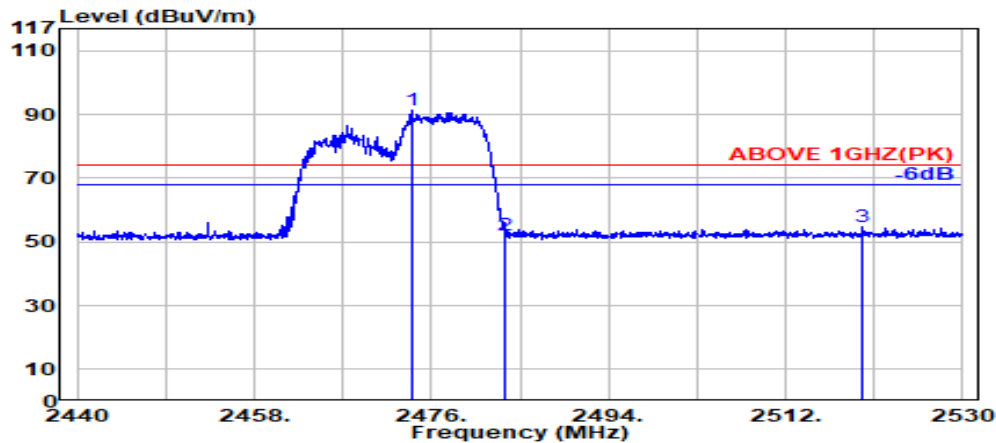

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.950	28.45	6.15	34.51	91.24	91.33	---	---	Peak
2483.500	28.47	6.17	34.52	51.78	51.89	74.00	22.11	Peak
2519.850	28.62	6.21	34.52	54.30	54.61	74.00	19.39	Peak

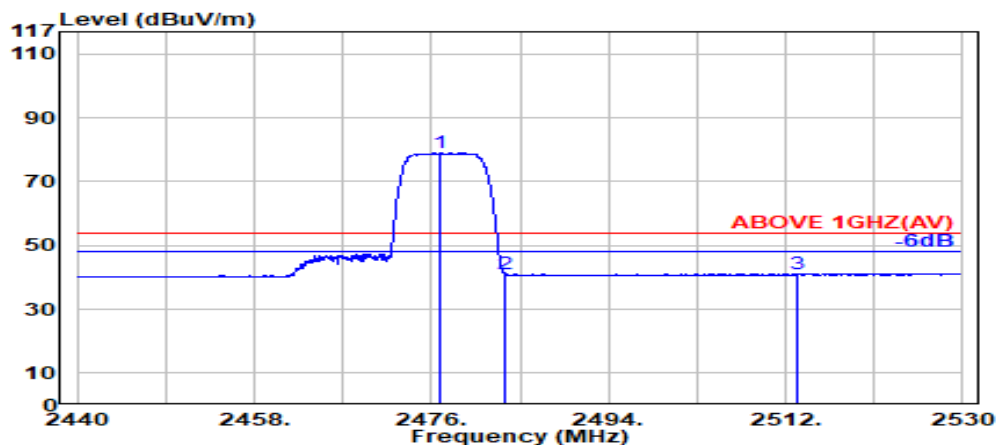


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.900	28.45	6.16	34.52	78.92	79.02	---	---	Average
2483.500	28.47	6.17	34.52	41.05	41.17	54.00	12.83	Average
2513.250	28.58	6.21	34.52	40.88	41.14	54.00	12.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

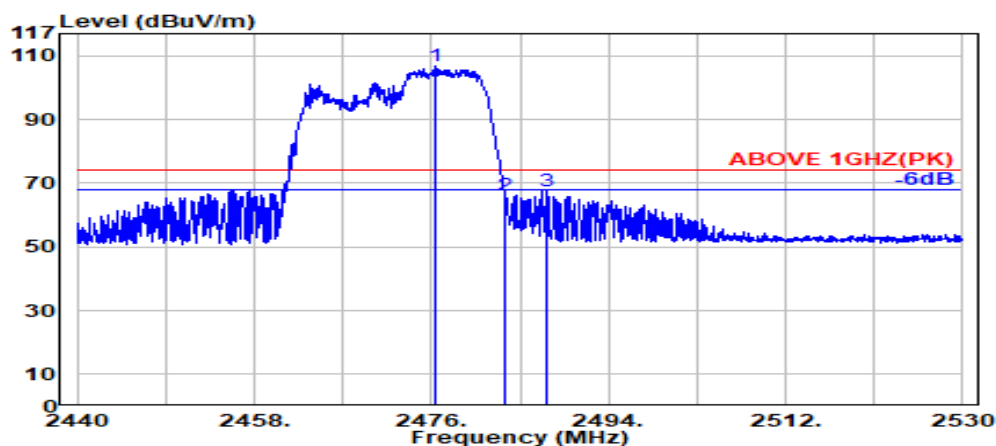

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.350	28.45	6.16	34.52	106.90	106.99	---	---	Peak
2483.500	28.47	6.17	34.52	65.93	66.04	74.00	7.96	Peak
2487.800	28.48	6.17	34.52	67.30	67.44	74.00	6.56	Peak

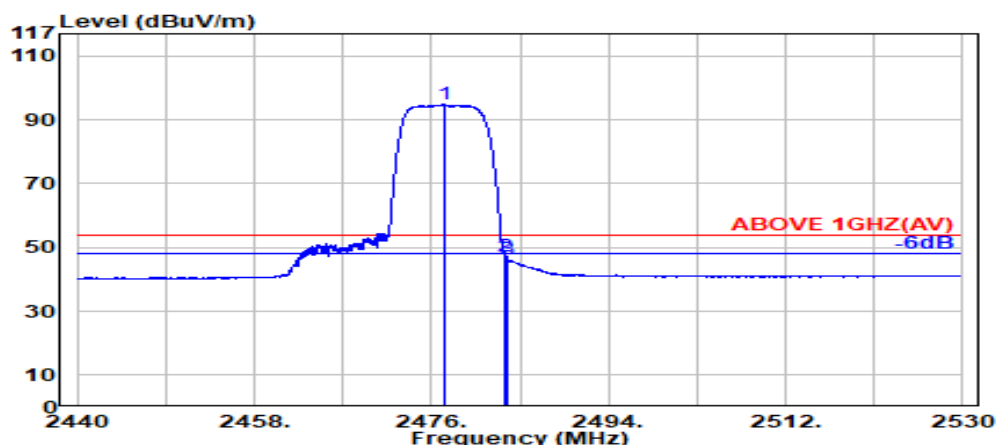

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.250	28.45	6.16	34.52	94.77	94.87	---	---	Average
2483.500	28.47	6.17	34.52	47.32	47.43	54.00	6.57	Average
2483.700	28.47	6.17	34.52	46.32	46.44	54.00	7.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

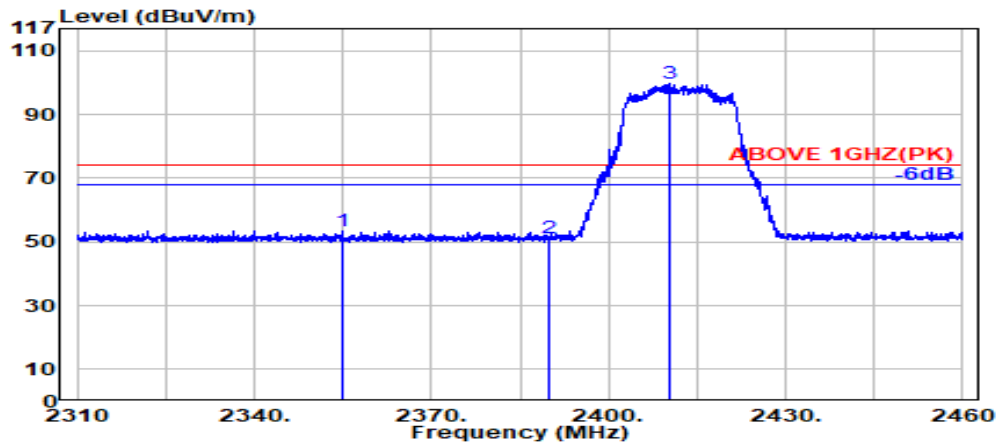

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.000	28.46	5.98	34.49	53.50	53.45	74.00	20.55	Peak
2389.800	28.18	6.03	34.50	51.30	51.01	74.00	22.99	Peak
@ 2410.450	28.16	6.06	34.50	99.86	99.59	---	---	Peak

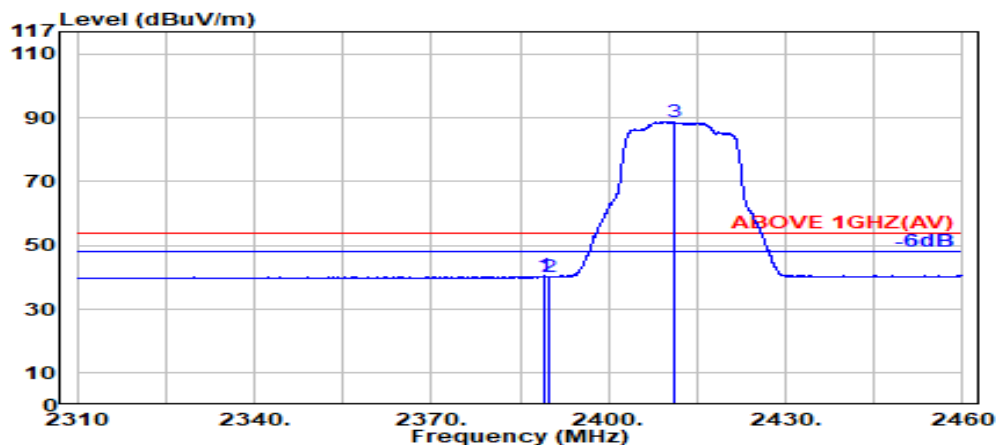


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	40.73	40.45	54.00	13.55	Average
2389.800	28.18	6.03	34.50	40.48	40.20	54.00	13.80	Average
@ 2411.000	28.17	6.06	34.50	89.22	88.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

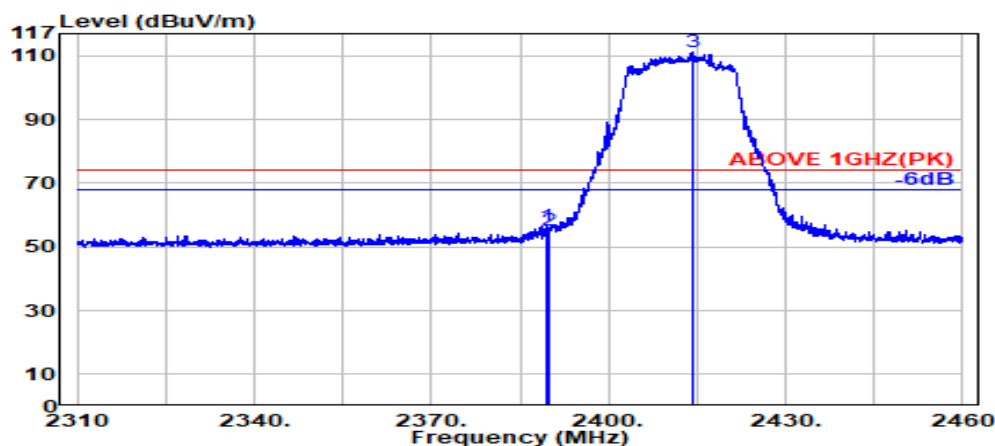

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	56.85	56.57	74.00	17.43	Peak
2389.800	28.18	6.03	34.50	55.45	55.17	74.00	18.83	Peak
@ 2414.100	28.19	6.07	34.50	111.36	111.11	---	---	Peak

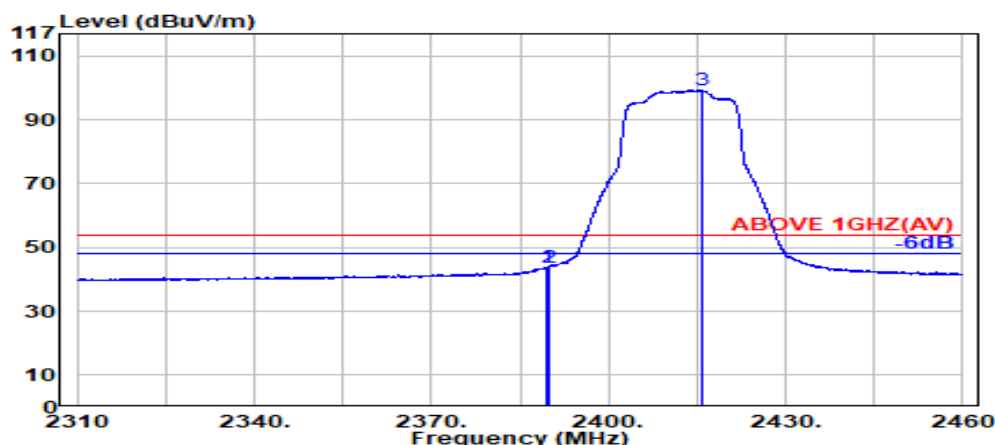

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	44.07	43.79	54.00	10.21	Average
2389.800	28.18	6.03	34.50	44.09	43.81	54.00	10.19	Average
@ 2415.750	28.20	6.07	34.50	99.65	99.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

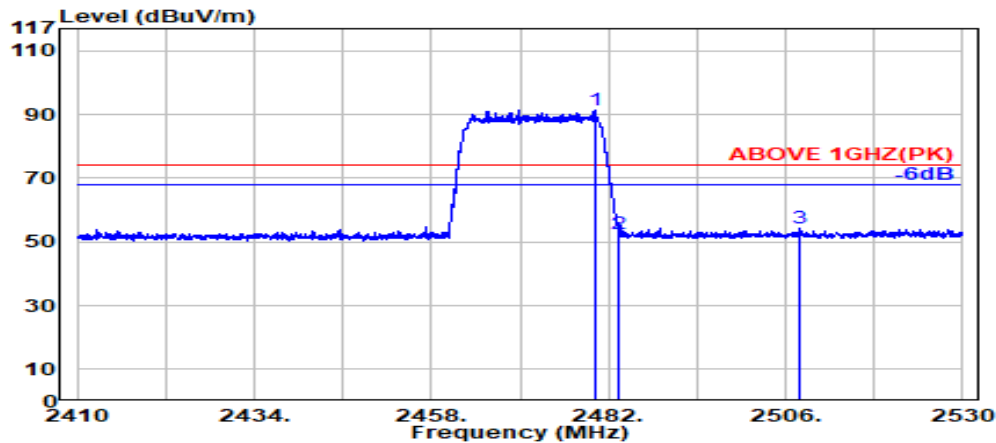

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	34.52	91.45	91.56	---	---	Peak
2483.500	28.47	6.17	34.52	52.51	52.63	74.00	21.37	Peak
2507.850	28.55	6.20	34.52	54.24	54.47	74.00	19.53	Peak

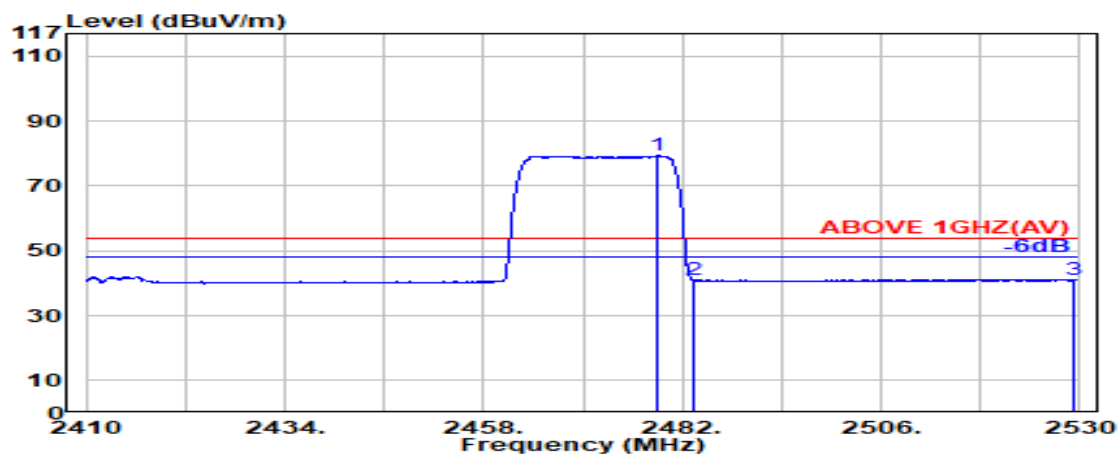

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.950	28.46	6.16	34.52	79.21	79.31	---	---	Peak
2483.500	28.47	6.17	34.52	40.89	41.00	54.00	13.00	Peak
2529.400	28.68	6.22	34.53	40.85	41.23	54.00	12.77	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

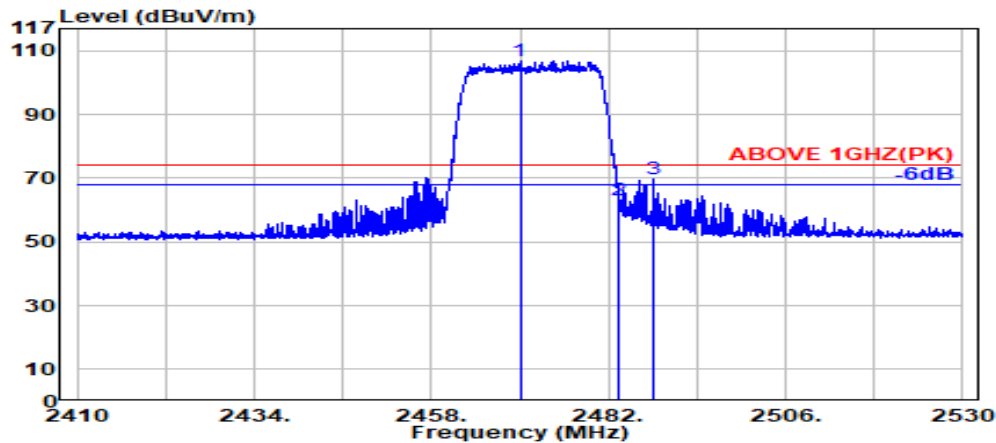

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.44	6.15	34.51	106.97	107.04	---	---	Peak
2483.500	28.47	6.17	34.52	63.21	63.32	74.00	10.68	Peak
2488.100	28.48	6.17	34.52	69.50	69.63	74.00	4.37	Peak

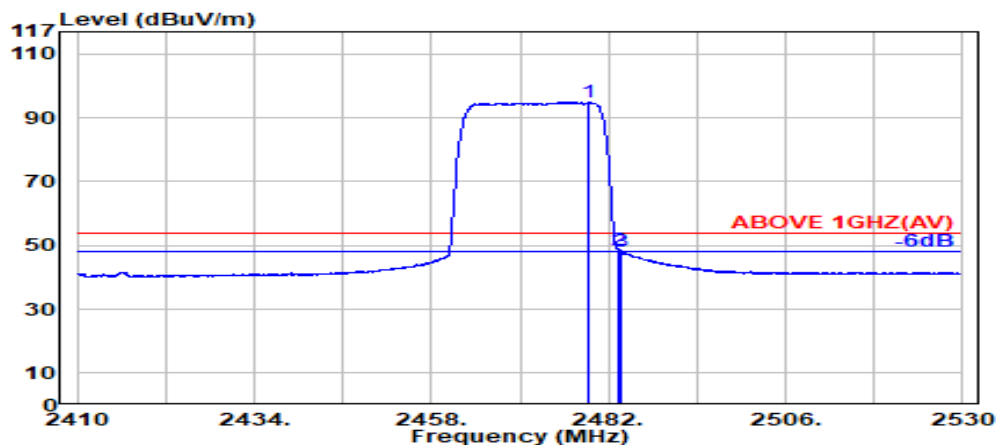


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.350	28.46	6.16	34.52	94.80	94.90	---	---	Average
2483.500	28.47	6.17	34.52	48.26	48.37	54.00	5.63	Average
2483.700	28.47	6.17	34.52	47.82	47.93	54.00	6.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

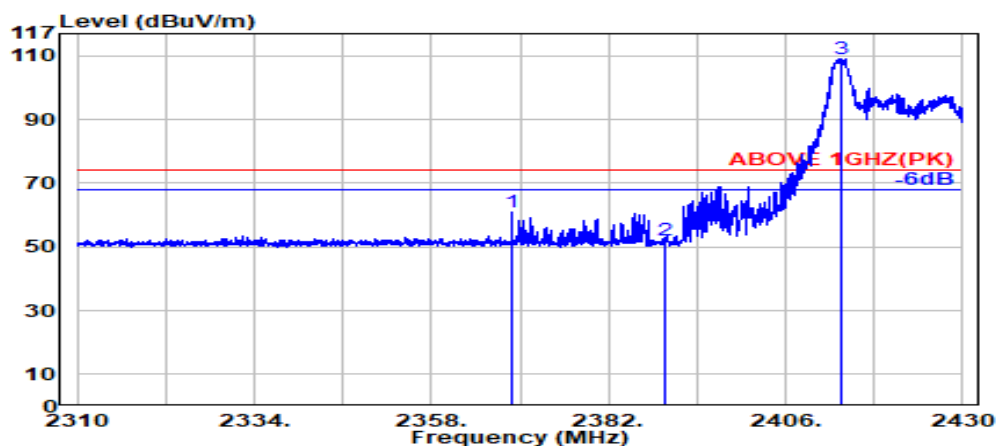

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2368.850	28.35	6.00	34.49	61.29	61.14	74.00	12.86	Peak
2389.800	28.18	6.03	34.50	52.27	51.99	74.00	22.01	Peak
@ 2413.450	28.18	6.07	34.50	109.45	109.20	---	---	Peak

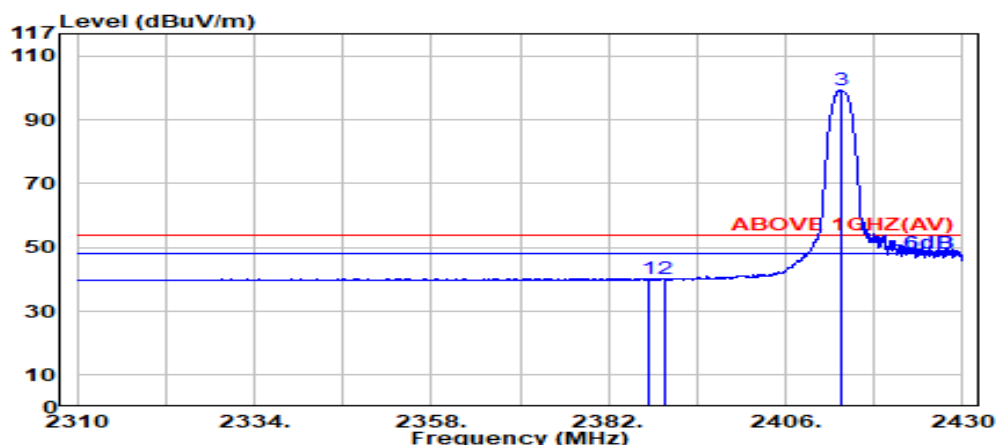

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.400	28.20	6.03	34.50	40.51	40.25	54.00	13.75	Average
2389.800	28.18	6.03	34.50	40.28	40.00	54.00	14.00	Average
@ 2413.450	28.18	6.07	34.50	99.47	99.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

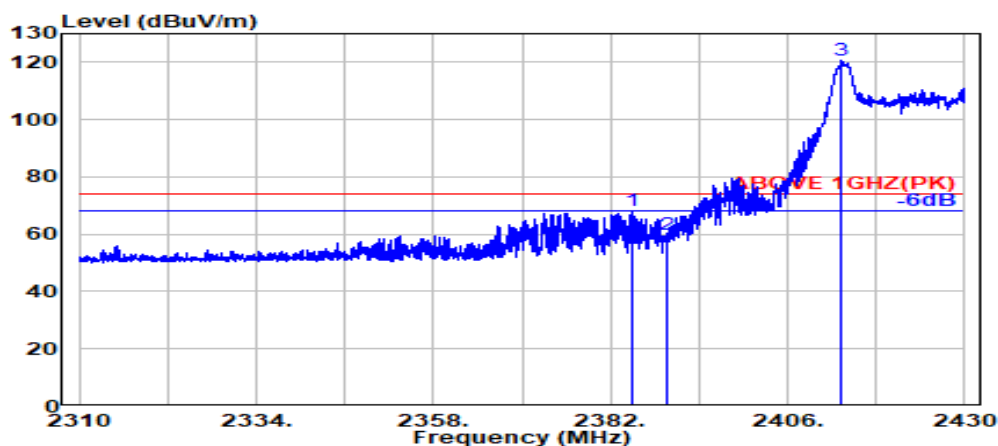

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.050	28.22	6.03	34.50	68.25	68.00	74.00	6.00	Peak
2389.800	28.18	6.03	34.50	60.29	60.00	74.00	14.00	Peak
@ 2413.200	28.18	6.07	34.50	120.75	120.50	---	---	Peak

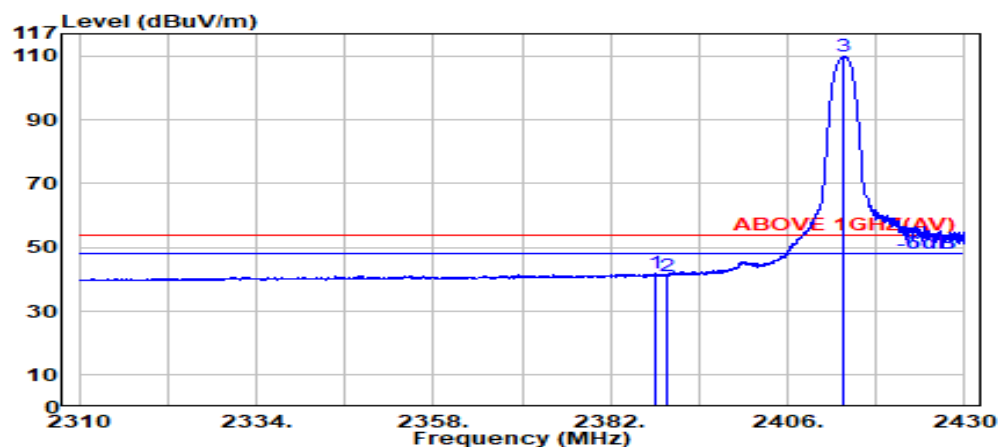

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.200	28.19	6.03	34.50	42.10	41.83	54.00	12.17	Average
2389.800	28.18	6.03	34.50	41.43	41.15	54.00	12.85	Average
@ 2413.650	28.18	6.07	34.50	110.24	109.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

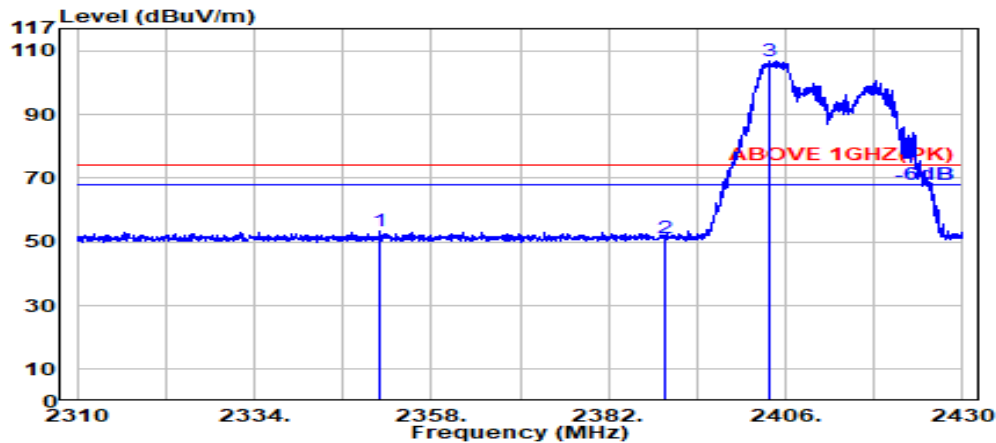

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2351.000	28.49	5.98	34.49	53.41	53.39	74.00	20.61	Peak
2389.800	28.18	6.03	34.50	51.54	51.26	74.00	22.74	Peak
@ 2403.800	28.12	6.05	34.50	107.24	106.92	---	---	Peak

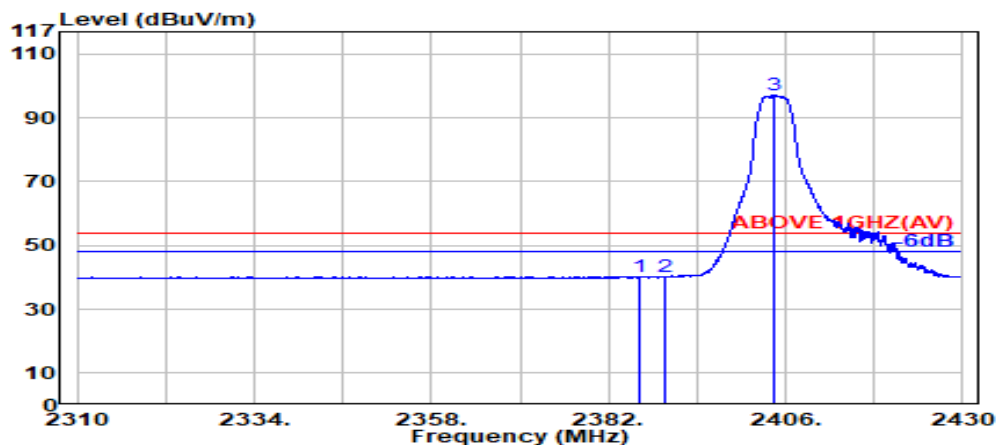

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.050	28.21	6.03	34.50	40.60	40.34	54.00	13.66	Average
2389.800	28.18	6.03	34.50	40.32	40.04	54.00	13.96	Average
@ 2404.450	28.13	6.06	34.50	97.41	97.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

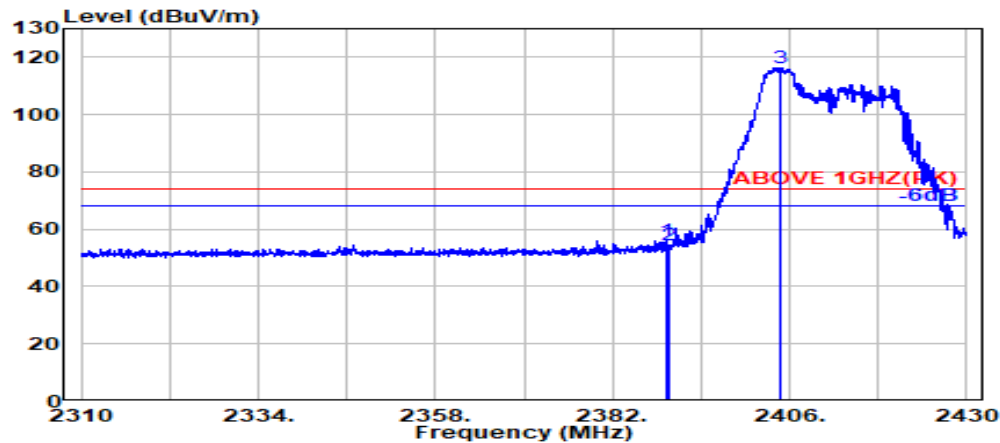

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.50	56.42	56.14	74.00	17.86	Peak
2389.800	28.18	6.03	34.50	54.64	54.36	74.00	19.64	Peak
@ 2404.750	28.13	6.06	34.50	116.66	116.35	---	---	Peak

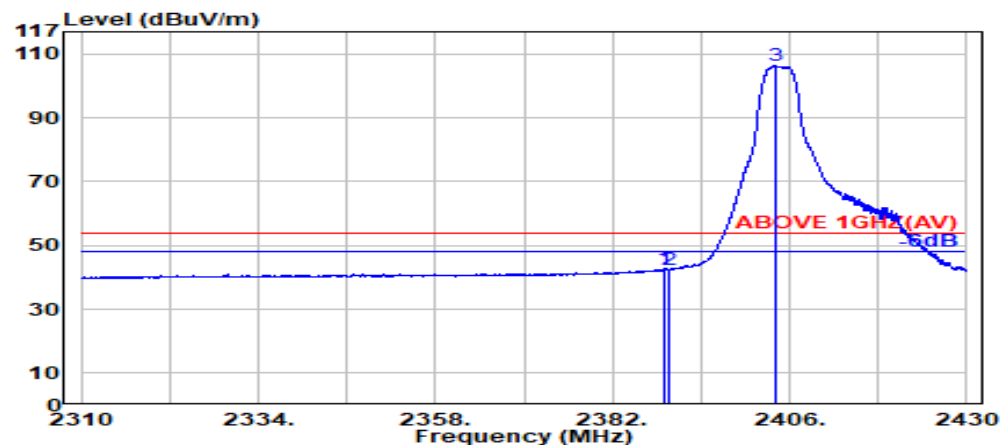

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.19	6.03	34.50	43.16	42.88	54.00	11.12	Average
2389.800	28.18	6.03	34.50	42.63	42.35	54.00	11.65	Average
@ 2404.200	28.13	6.06	34.50	106.55	106.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

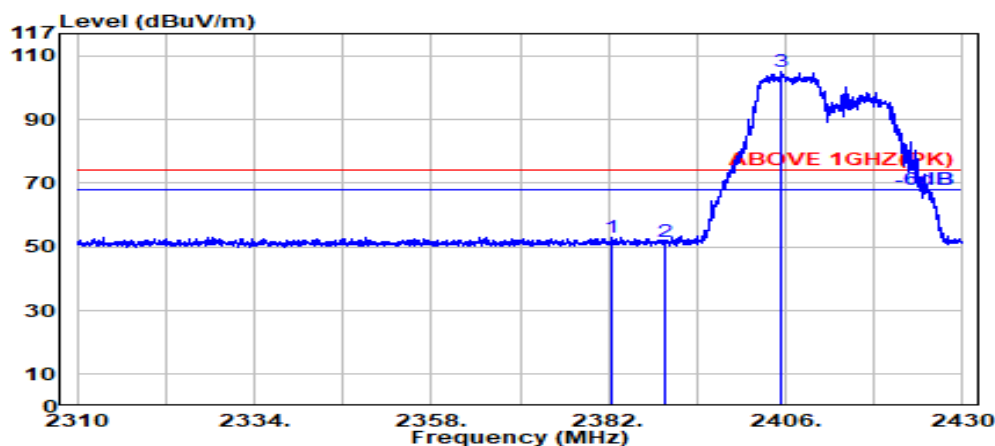

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.500	28.24	6.02	34.50	53.36	53.12	74.00	20.88	Peak
2389.800	28.18	6.03	34.50	52.05	51.77	74.00	22.23	Peak
@ 2405.450	28.13	6.06	34.50	105.50	105.19	---	---	Peak

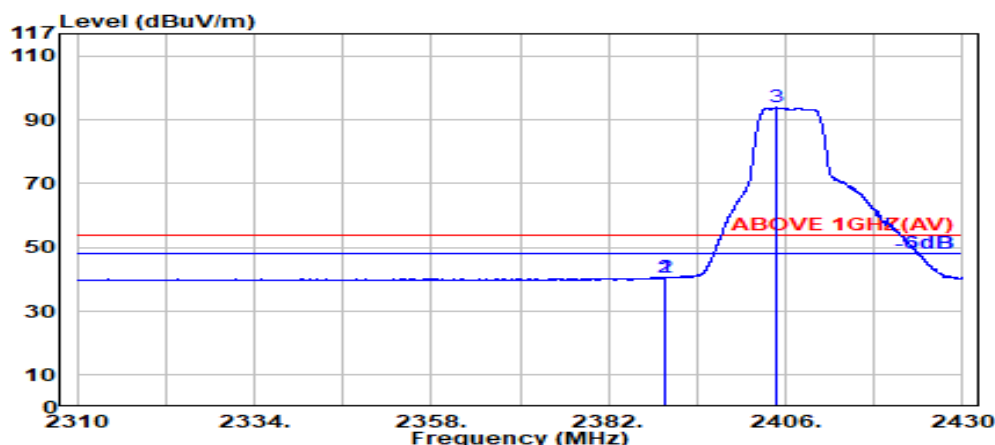

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	41.06	40.78	54.00	13.22	Average
2389.800	28.18	6.03	34.50	40.86	40.58	54.00	13.42	Average
@ 2404.750	28.13	6.06	34.50	94.38	94.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

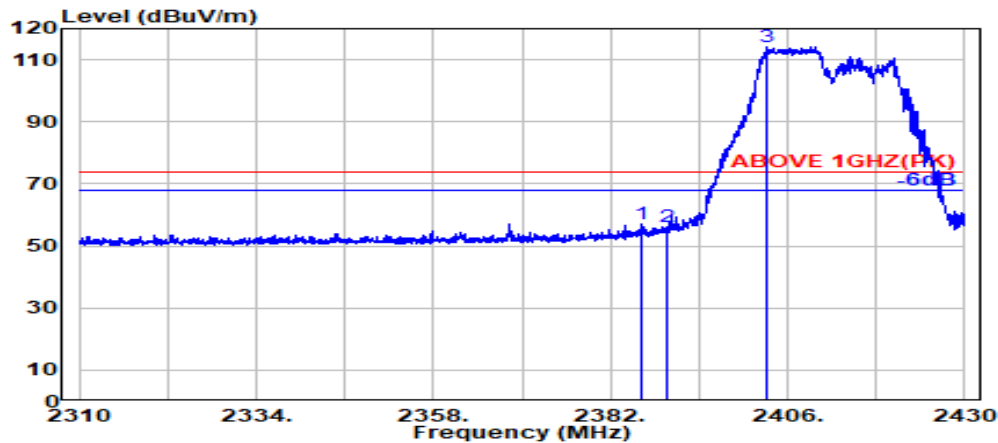

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.050	28.21	6.03	34.50	57.50	57.24	74.00	16.76	Peak
2389.800	28.18	6.03	34.50	56.27	55.99	74.00	18.01	Peak
@ 2403.100	28.12	6.05	34.50	114.37	114.04	---	---	Peak

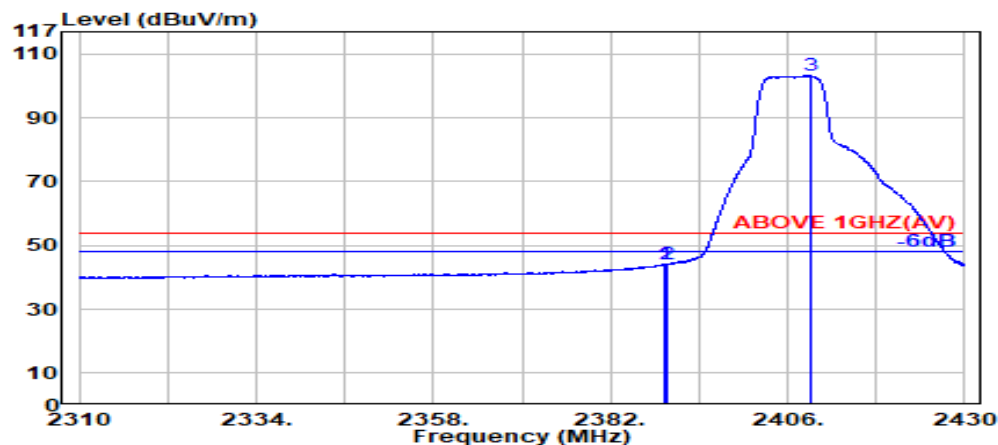

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	28.18	6.03	34.50	44.42	44.14	54.00	9.86	Average
2389.800	28.18	6.03	34.50	44.31	44.03	54.00	9.97	Average
@ 2409.050	28.15	6.06	34.50	103.71	103.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

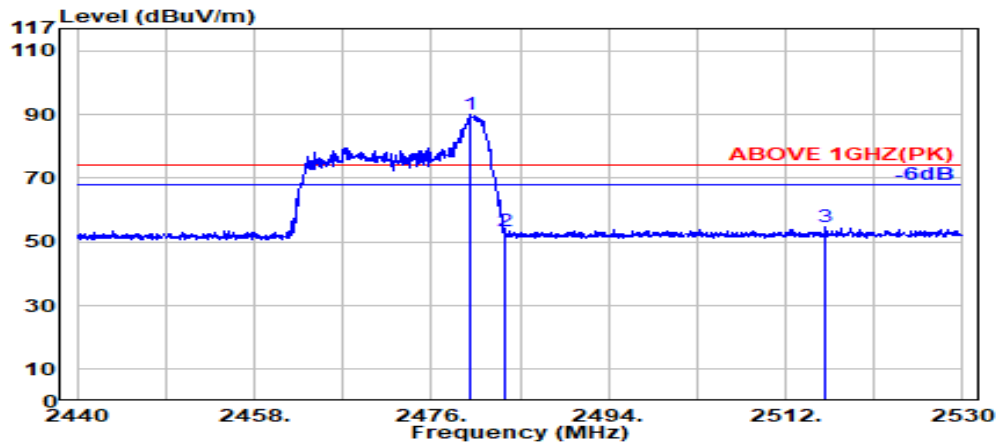

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	34.52	90.02	90.13	---	---	Peak
2483.500	28.47	6.17	34.52	53.27	53.39	74.00	20.61	Peak
2516.050	28.60	6.21	34.52	54.33	54.61	74.00	19.39	Peak

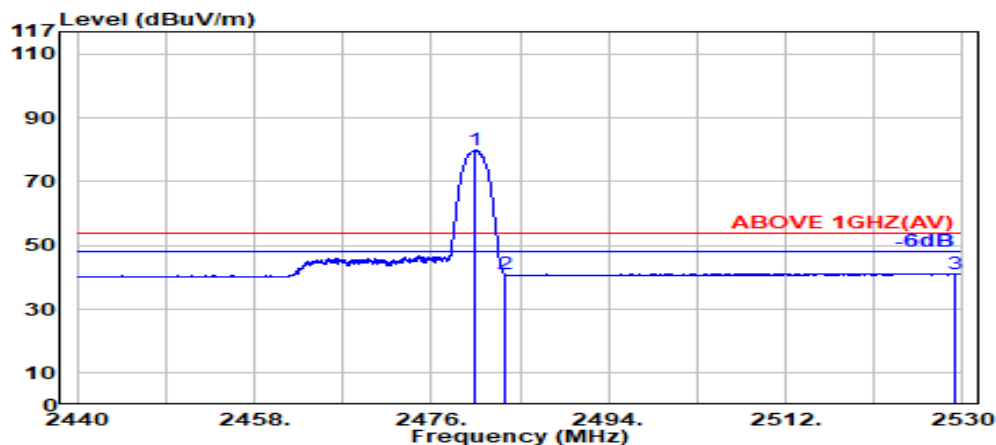

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.46	6.16	34.52	79.70	79.81	---	---	Average
2483.500	28.47	6.17	34.52	40.81	40.93	54.00	13.07	Average
2529.200	28.68	6.22	34.53	40.81	41.19	54.00	12.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

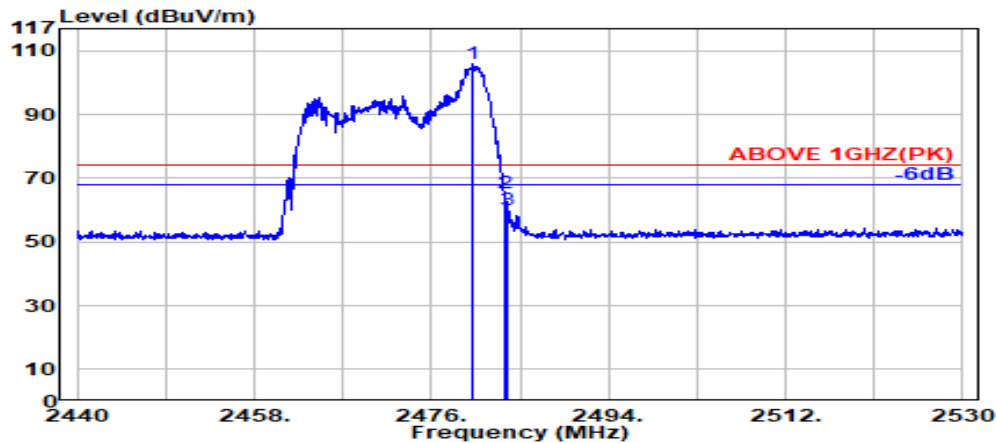

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.46	6.16	34.52	105.98	106.09	---	---	Peak
2483.500	28.47	6.17	34.52	65.21	65.33	74.00	8.67	Peak
2483.750	28.47	6.17	34.52	60.01	60.13	74.00	13.87	Peak

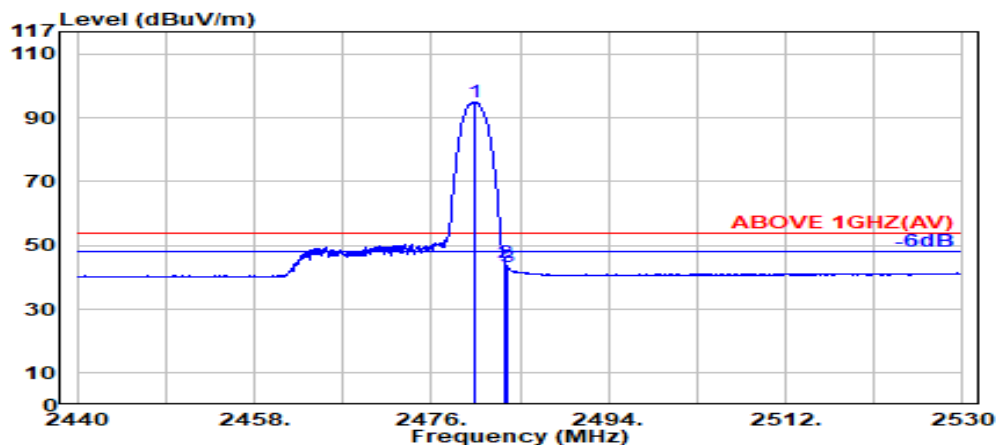

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.46	6.16	34.52	94.84	94.95	---	---	Average
2483.500	28.47	6.17	34.52	44.44	44.56	54.00	9.44	Average
2483.700	28.47	6.17	34.52	43.28	43.40	54.00	10.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

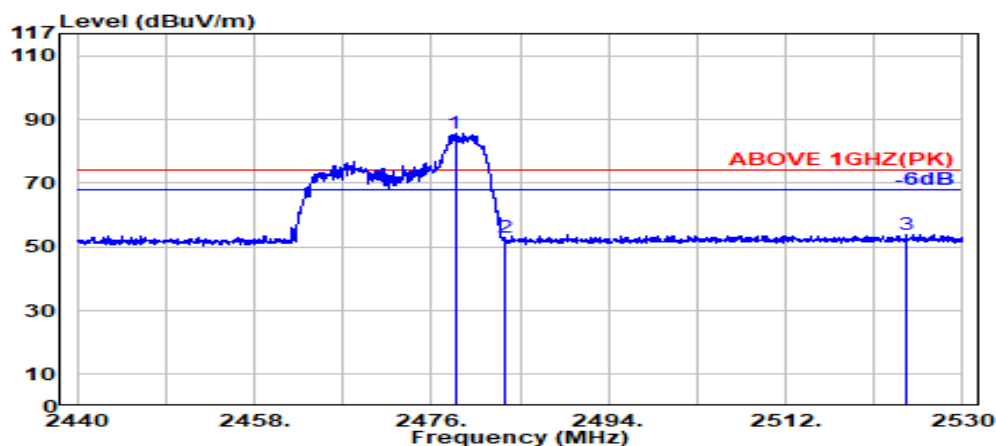

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.400	28.46	6.16	34.52	85.75	85.85	---	---	Peak
2483.500	28.47	6.17	34.52	52.72	52.84	74.00	21.16	Peak
2524.250	28.65	6.22	34.53	53.56	53.90	74.00	20.10	Peak

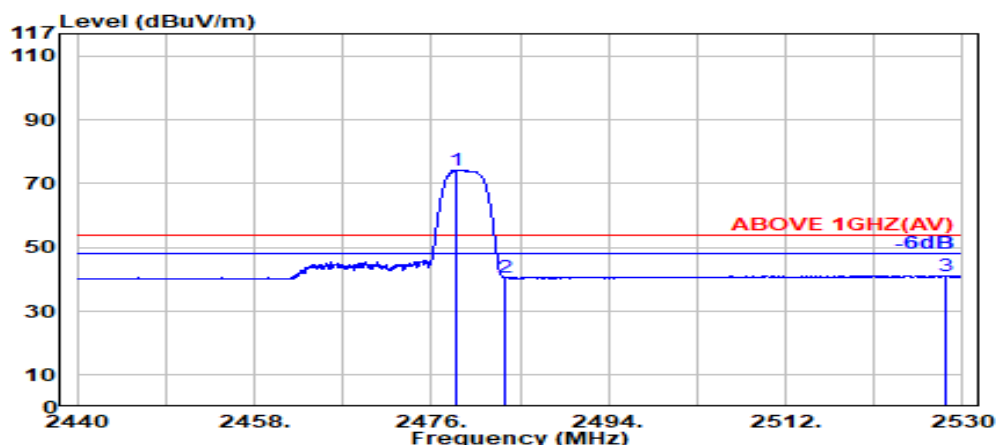

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.600	28.46	6.16	34.52	74.25	74.35	---	---	Average
2483.500	28.47	6.17	34.52	40.38	40.50	54.00	13.50	Average
2528.300	28.67	6.22	34.53	40.87	41.24	54.00	12.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

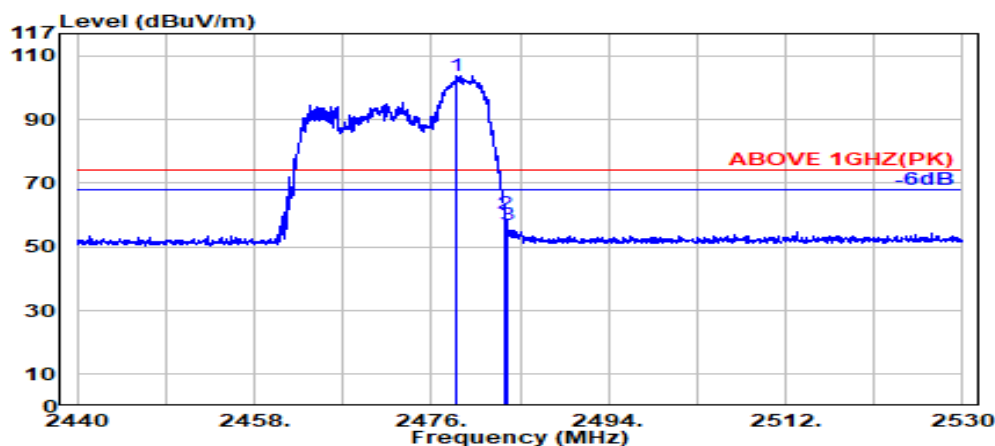

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.550	28.46	6.16	34.52	103.87	103.97	---	---	Peak
2483.500	28.47	6.17	34.52	60.30	60.41	74.00	13.59	Peak
2483.700	28.47	6.17	34.52	56.64	56.76	74.00	17.24	Peak

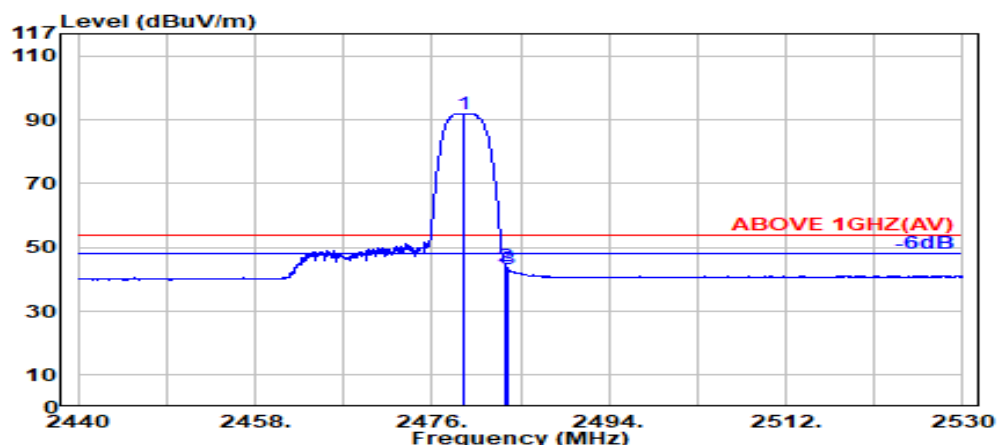

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.250	28.46	6.16	34.52	91.91	92.02	---	---	Average
2483.500	28.47	6.17	34.52	44.14	44.25	54.00	9.75	Average
2483.700	28.47	6.17	34.52	43.15	43.27	54.00	10.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

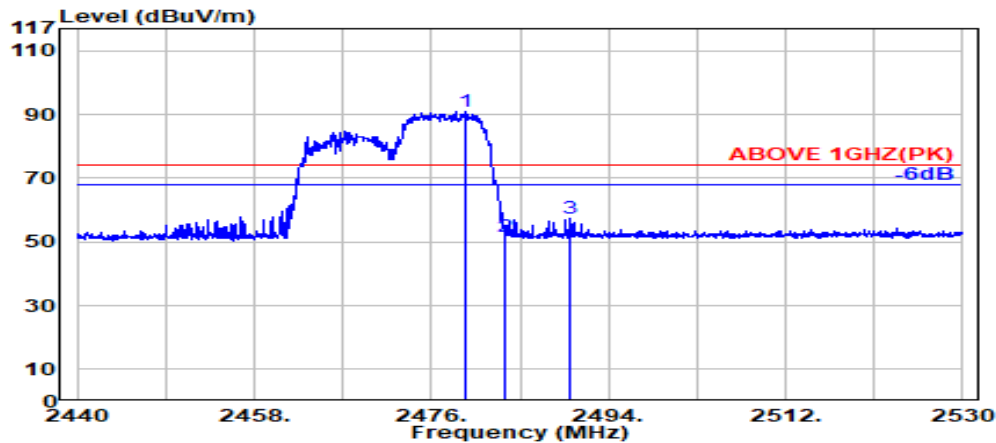

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.400	28.46	6.16	34.52	90.87	90.97	---	---	Peak
2483.500	28.47	6.17	34.52	51.68	51.80	74.00	22.20	Peak
2490.150	28.48	6.18	34.52	57.04	57.18	74.00	16.82	Peak

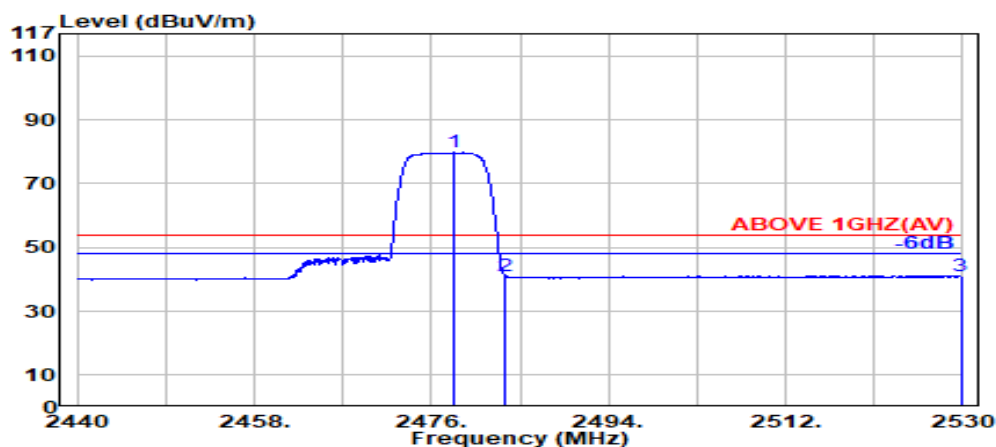

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.350	28.46	6.16	34.52	79.72	79.82	---	---	Average
2483.500	28.47	6.17	34.52	41.10	41.22	54.00	12.78	Average
2529.800	28.68	6.23	34.53	40.73	41.11	54.00	12.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

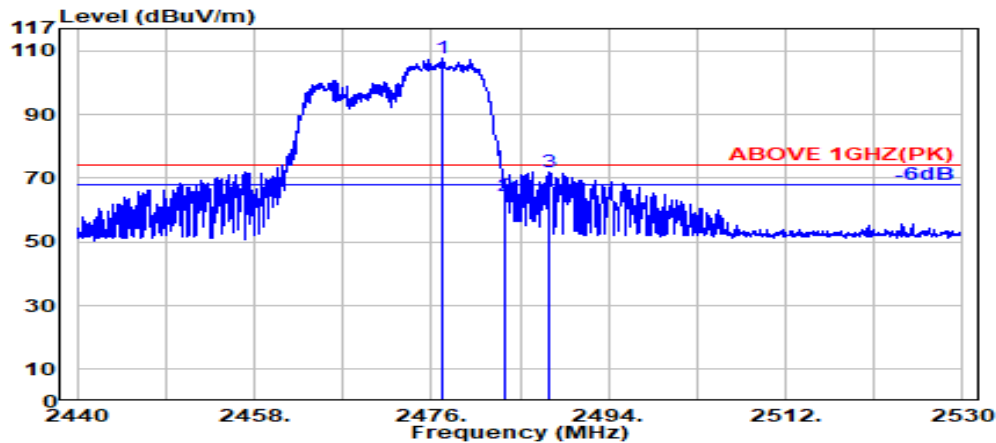

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.45	6.16	34.52	107.42	107.51	---	---	Peak
2483.500	28.47	6.17	34.52	64.35	64.47	74.00	9.53	Peak
2488.050	28.48	6.17	34.52	71.94	72.07	74.00	1.93	Peak

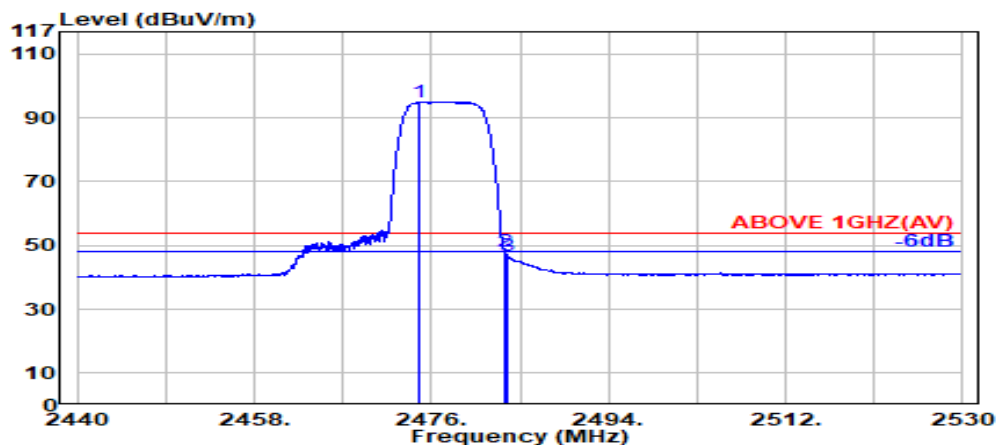

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.750	28.45	6.15	34.52	94.99	95.08	---	---	Average
2483.500	28.47	6.17	34.52	47.81	47.93	54.00	6.07	Average
2483.700	28.47	6.17	34.52	46.54	46.66	54.00	7.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

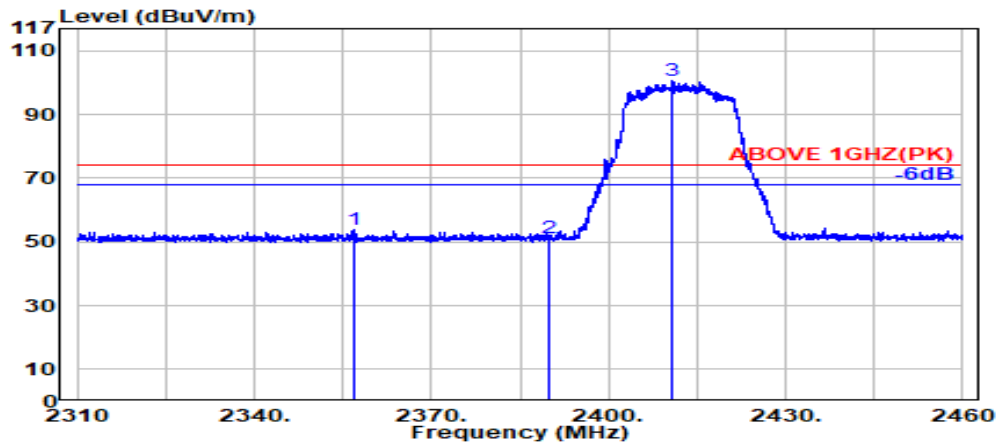

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2356.750	28.45	5.99	34.49	53.77	53.71	74.00	20.29	Peak
2389.800	28.18	6.03	34.50	51.48	51.19	74.00	22.81	Peak
@ 2410.900	28.17	6.06	34.50	100.88	100.61	---	---	Peak

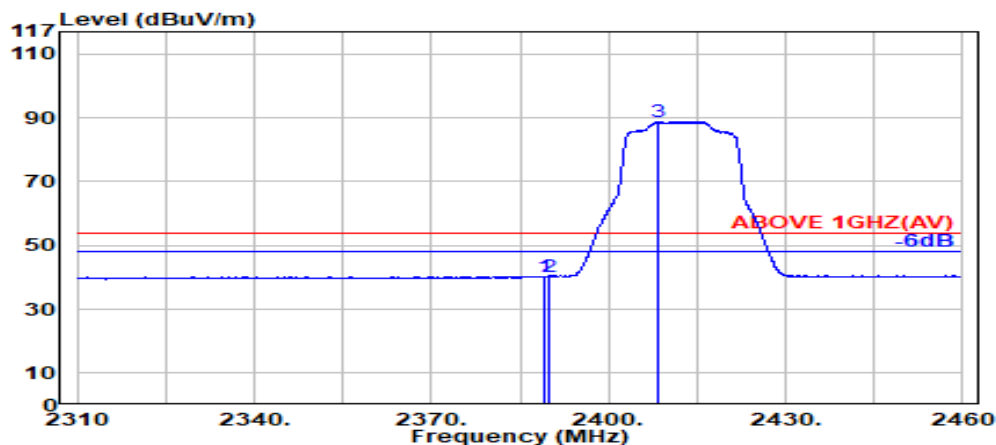

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	40.64	40.36	54.00	13.64	Average
2389.800	28.18	6.03	34.50	40.59	40.31	54.00	13.69	Average
@ 2408.550	28.15	6.06	34.50	89.14	88.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

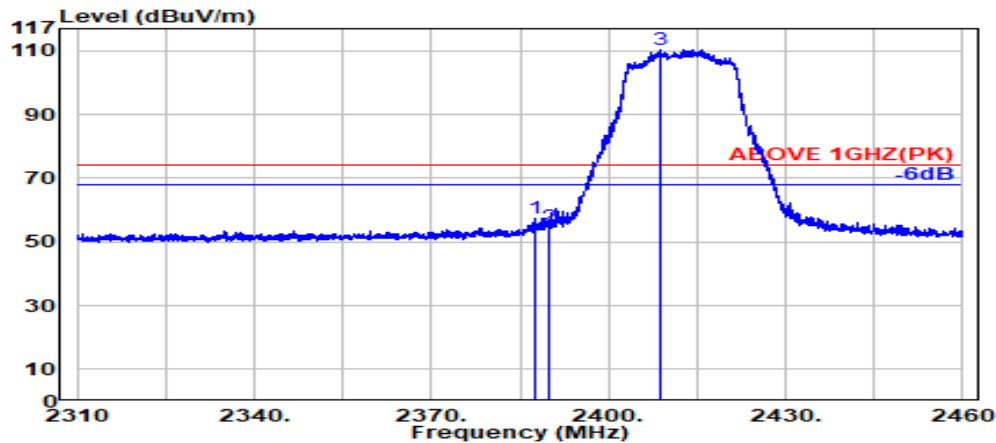

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.700	28.20	6.03	34.50	57.83	57.57	74.00	16.43	Peak
2389.800	28.18	6.03	34.50	55.22	54.94	74.00	19.06	Peak
@ 2408.750	28.15	6.06	34.50	110.74	110.45	---	---	Peak

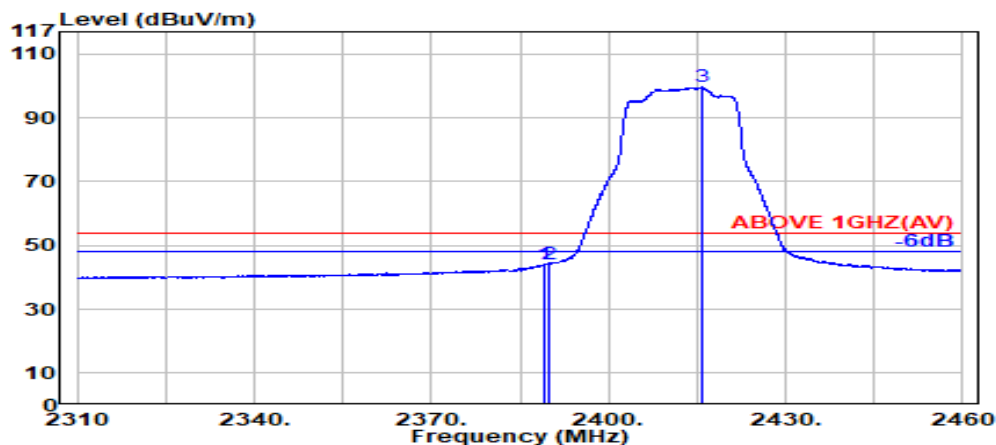

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	44.48	44.20	54.00	9.80	Average
2389.800	28.18	6.03	34.50	44.24	43.95	54.00	10.05	Average
@ 2415.950	28.20	6.07	34.50	99.96	99.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

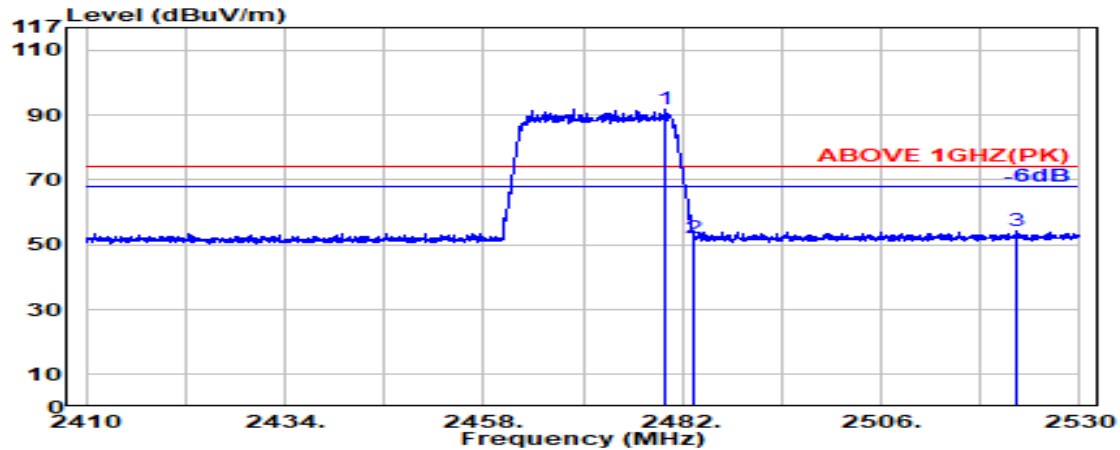

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.46	6.16	34.52	91.76	91.87	---	---	Peak
2483.500	28.47	6.17	34.52	51.77	51.89	74.00	22.11	Peak
2522.250	28.63	6.22	34.52	54.19	54.52	74.00	19.48	Peak

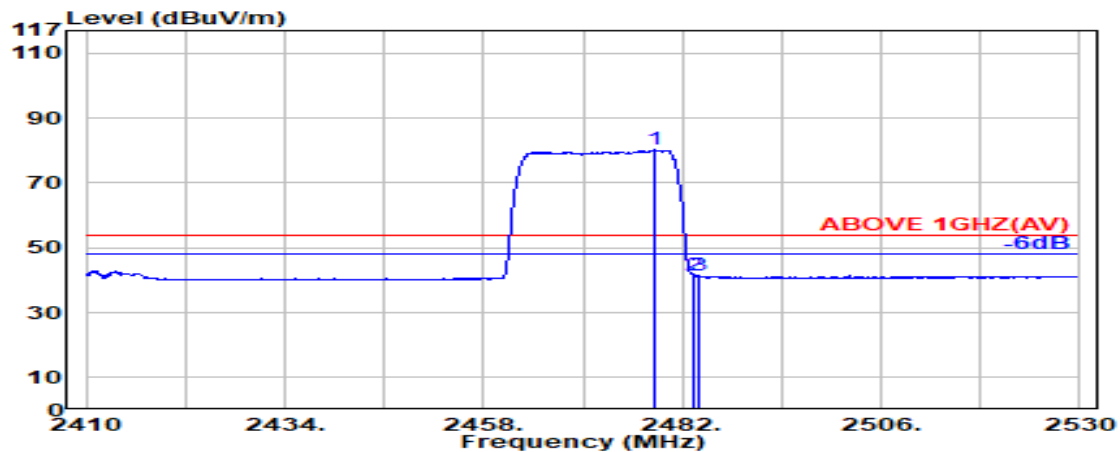

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	28.46	6.16	34.52	80.05	80.15	---	---	Average
2483.500	28.47	6.17	34.52	41.57	41.69	54.00	12.31	Average
2483.850	28.47	6.17	34.52	41.25	41.36	54.00	12.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

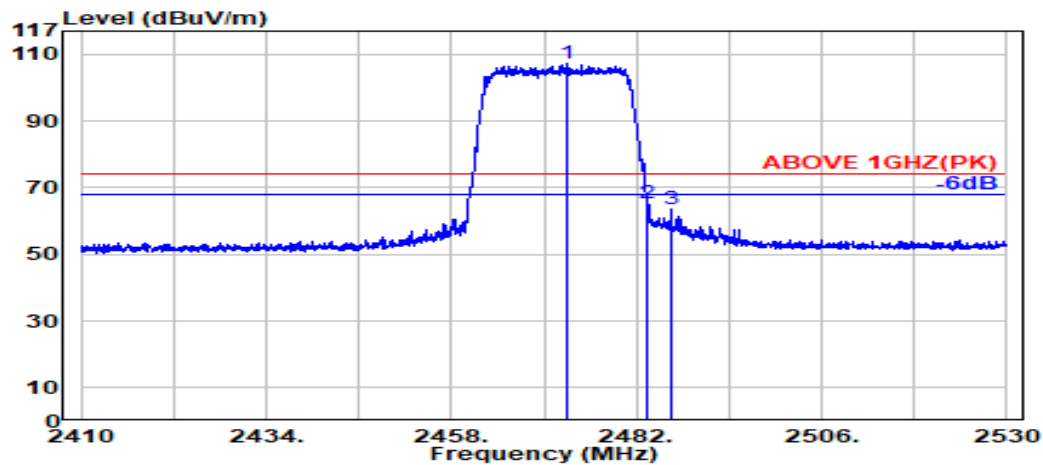

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.950	28.45	6.15	34.51	107.08	107.16	---	---	Peak
2483.500	28.47	6.17	34.52	65.30	65.42	74.00	8.58	Peak
2486.450	28.47	6.17	34.52	63.42	63.54	74.00	10.46	Peak

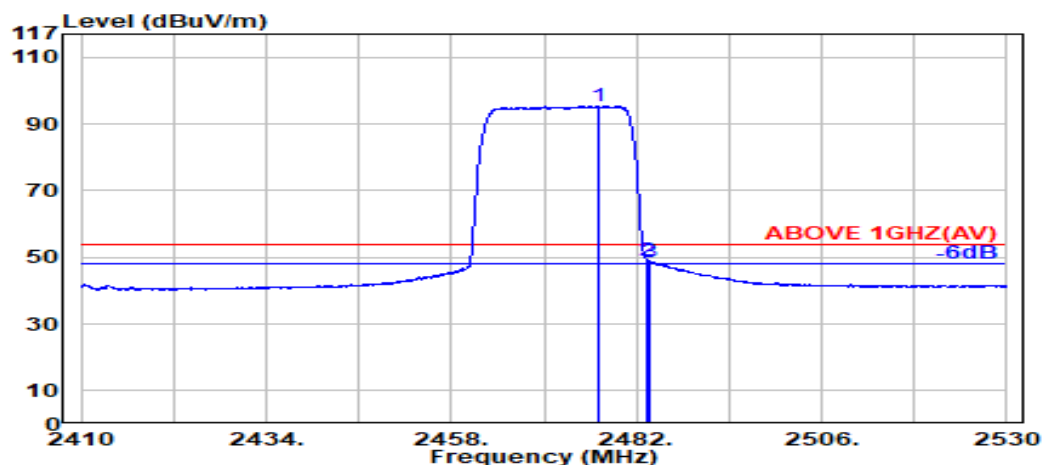

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.000	28.45	6.16	34.52	95.20	95.30	---	---	Average
2483.500	28.47	6.17	34.52	48.88	49.00	54.00	5.00	Average
2483.750	28.47	6.17	34.52	48.61	48.73	54.00	5.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

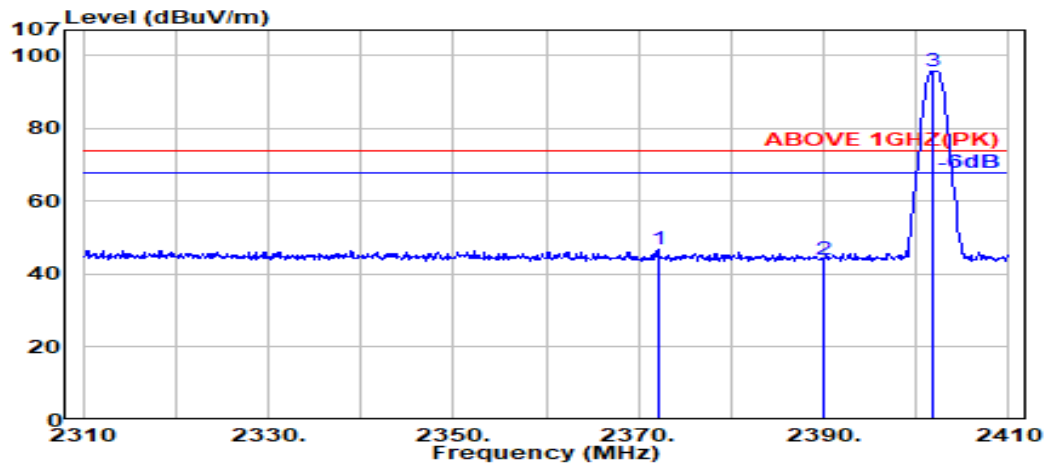

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.100	28.32	6.01	34.49	46.99	46.83	74.00	27.17	Peak
2390.000	28.18	6.03	34.50	44.41	44.12	74.00	29.88	Peak
@ 2401.800	28.11	6.05	34.50	96.12	95.78	---	---	Peak

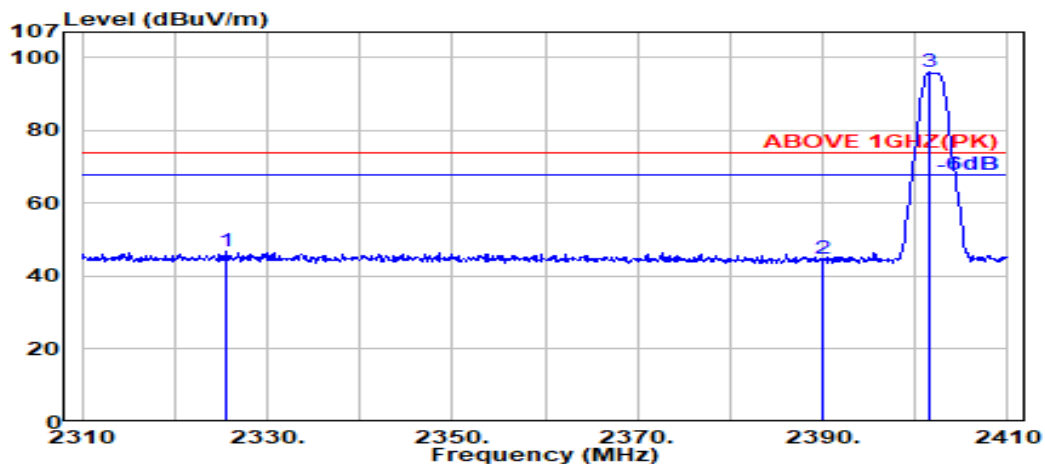

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2325.600	28.31	5.94	34.48	46.89	46.65	74.00	27.35	Peak
2390.000	28.18	6.03	34.50	45.16	44.88	74.00	29.12	Peak
@ 2401.500	28.11	6.05	34.50	96.28	95.94	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

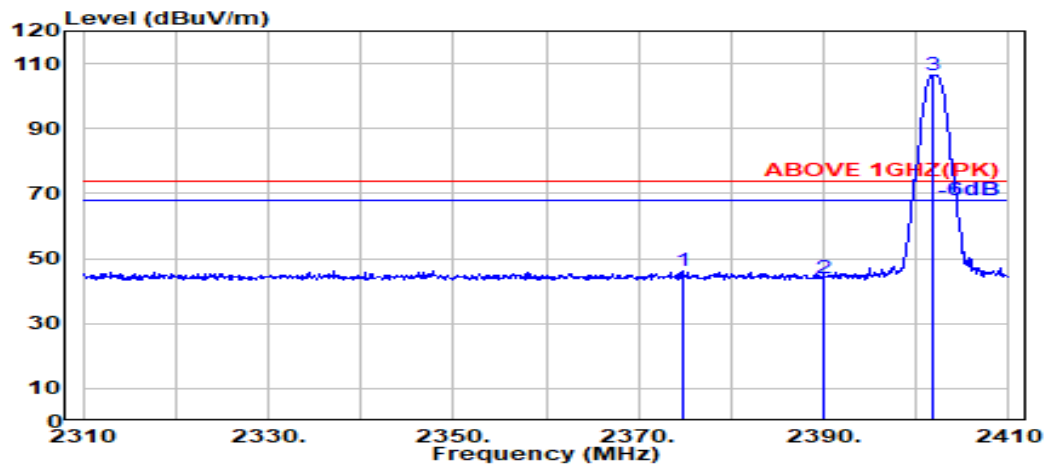

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2374.700	28.30	6.01	34.49	46.53	46.35	74.00	27.65	Peak
2390.000	28.18	6.03	34.50	44.27	43.99	74.00	30.01	Peak
@ 2401.700	28.11	6.05	34.50	106.63	106.29	---	---	Peak

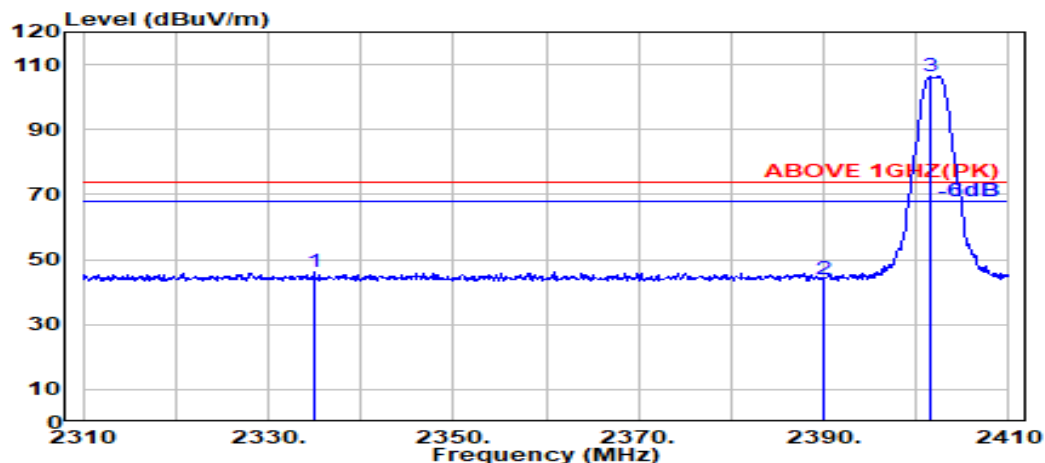

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2334.900	28.38	5.95	34.49	46.48	46.33	74.00	27.67	Peak
2390.000	28.18	6.03	34.50	44.36	44.08	74.00	29.92	Peak
@ 2401.500	28.11	6.05	34.50	106.65	106.31	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

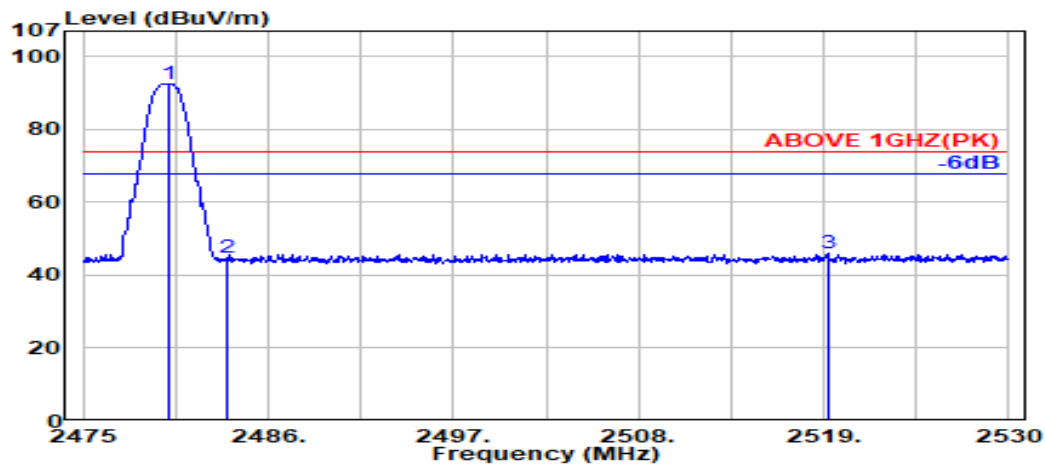

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.150	28.46	6.16	34.52	92.42	92.52	---	---	Peak
2483.500	28.47	6.17	34.52	44.52	44.64	74.00	29.36	Peak
2519.250	28.62	6.21	34.52	45.86	46.16	74.00	27.84	Peak

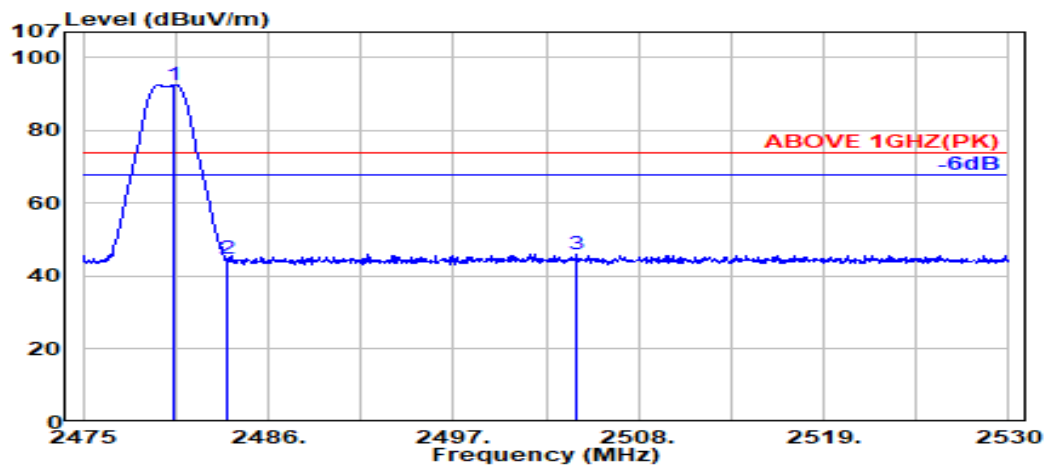

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.46	6.16	34.52	92.39	92.50	---	---	Peak
2483.500	28.47	6.17	34.52	44.53	44.64	74.00	29.36	Peak
2504.300	28.53	6.20	34.52	45.95	46.15	74.00	27.85	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

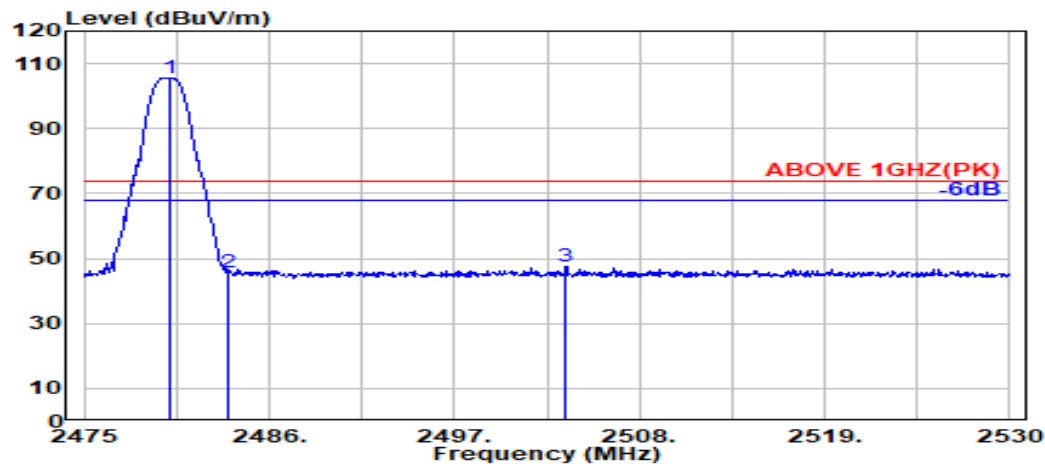

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.150	28.46	6.16	34.52	105.62	105.72	---	---	Peak
2483.500	28.47	6.17	34.52	45.51	45.62	74.00	28.38	Peak
2503.650	28.52	6.19	34.52	47.53	47.72	74.00	26.28	Peak

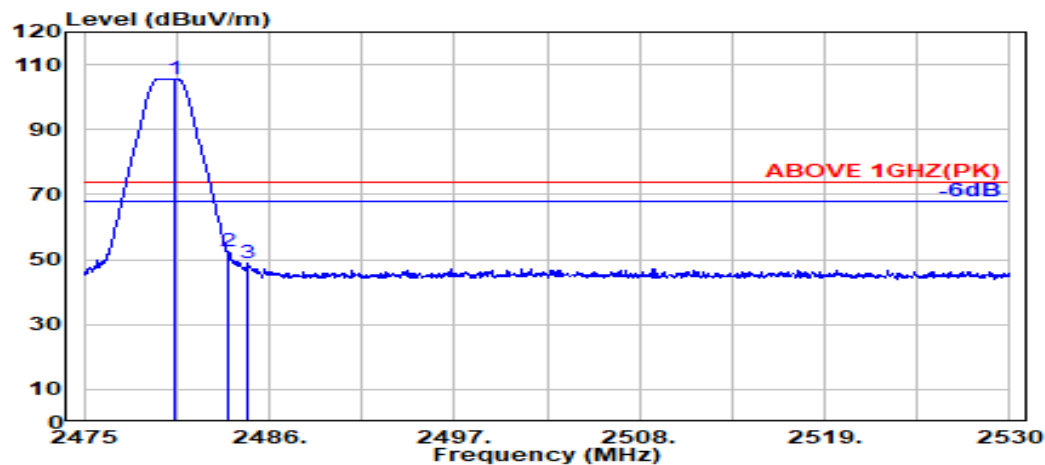

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.46	6.16	34.52	105.62	105.73	---	---	Peak
2483.500	28.47	6.17	34.52	52.26	52.38	74.00	21.62	Peak
2484.750	28.47	6.17	34.52	48.82	48.95	74.00	25.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

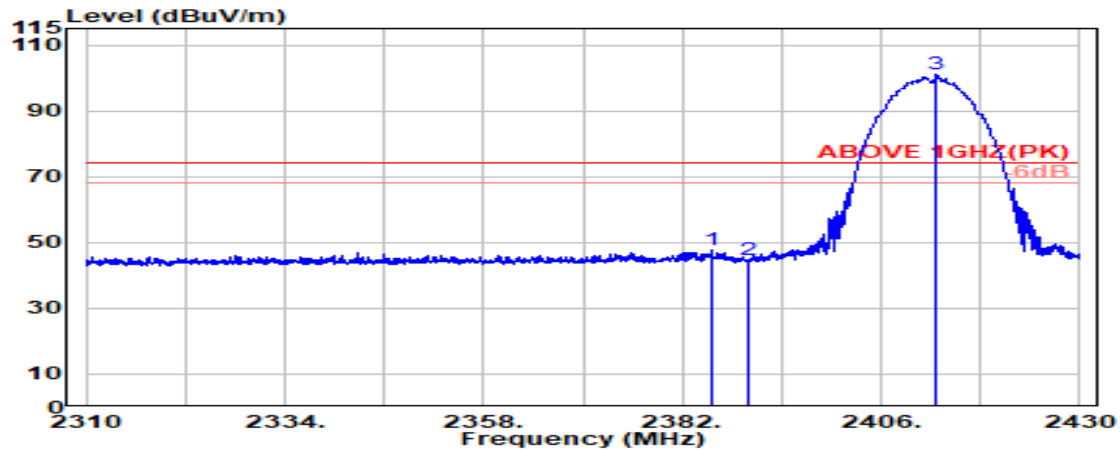

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.650	28.16	5.72	39.88	53.73	47.72	74.00	26.28	Peak
2390.000	28.14	5.72	39.88	50.57	44.55	74.00	29.45	Peak
@ 2412.750	28.15	5.75	39.88	107.16	101.18	---	---	Peak

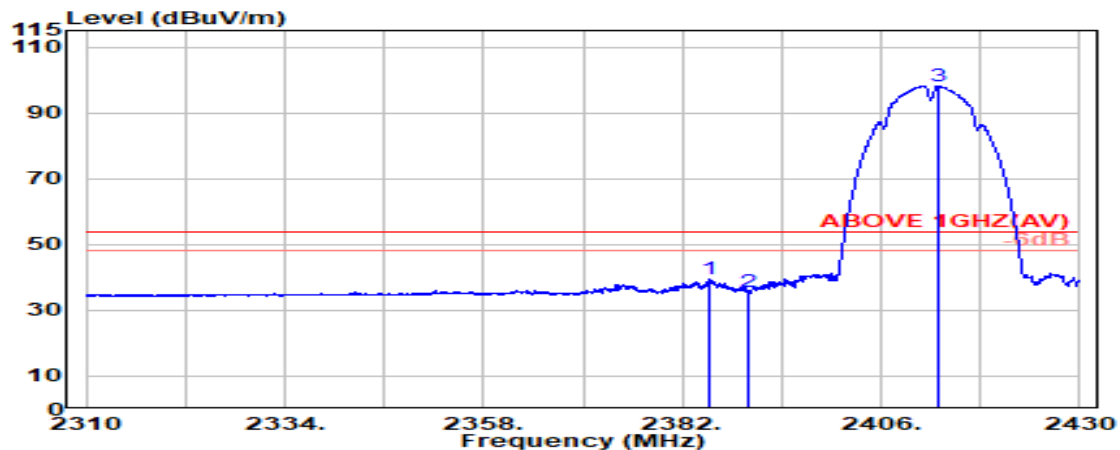

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.350	28.16	5.72	39.88	45.46	39.46	54.00	14.54	Average
2390.000	28.14	5.72	39.88	41.66	35.64	54.00	18.36	Average
@ 2412.800	28.15	5.75	39.88	104.11	98.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

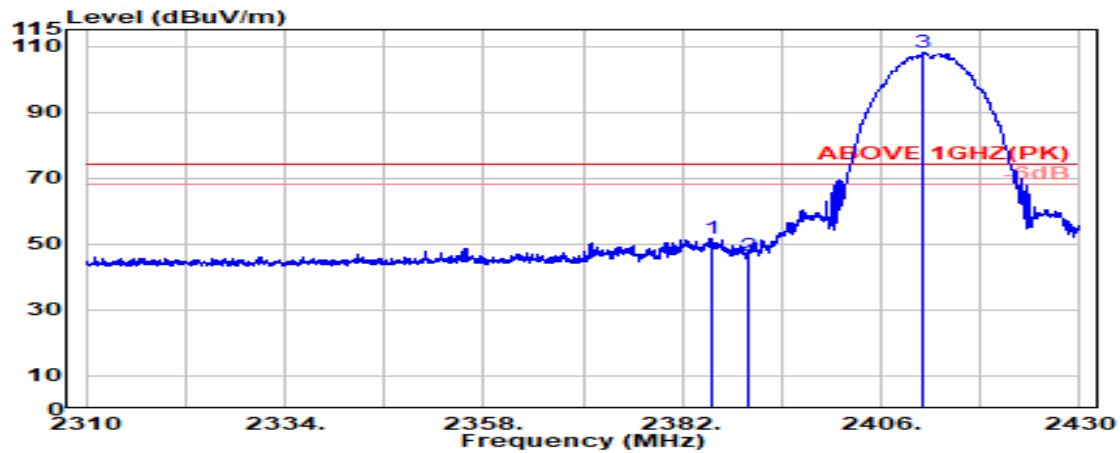

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.450	28.16	5.72	39.88	57.67	51.66	74.00	22.34	Peak
2390.000	28.14	5.72	39.88	52.62	46.60	74.00	27.40	Peak
@ 2411.150	28.14	5.75	39.88	113.94	107.96	---	---	Peak

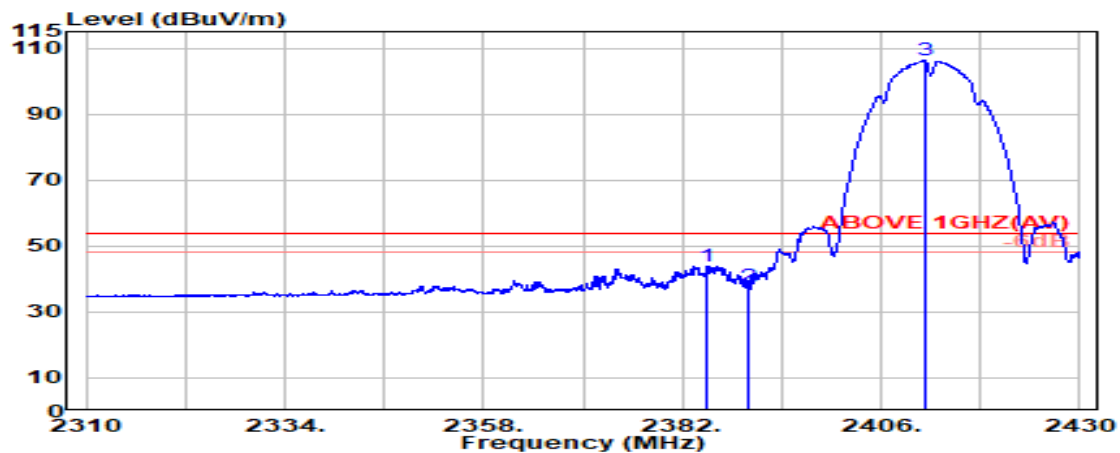

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.050	28.16	5.71	39.88	50.01	44.00	54.00	10.00	Average
2390.000	28.14	5.72	39.88	43.74	37.73	54.00	16.27	Average
@ 2411.250	28.15	5.75	39.88	112.19	106.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

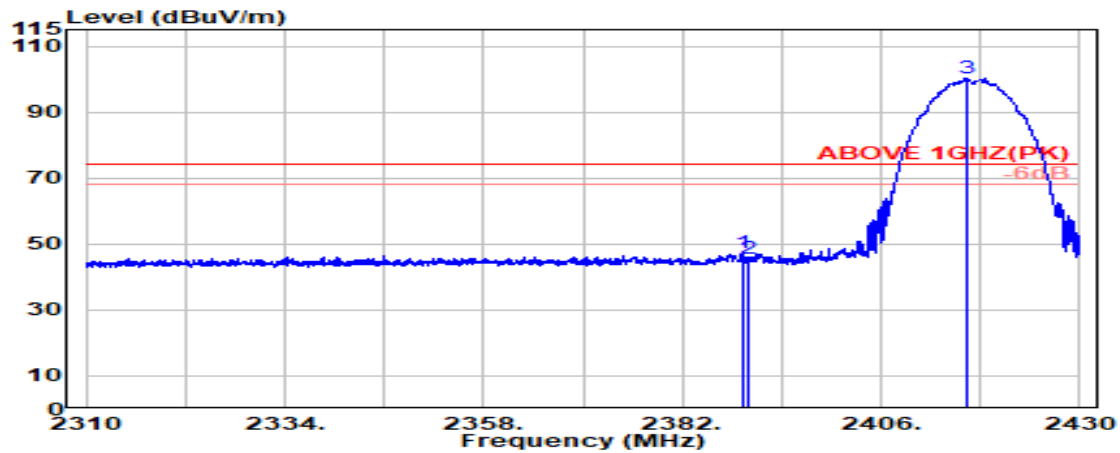

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	53.17	47.15	74.00	26.85	Peak
2390.000	28.14	5.72	39.88	51.53	45.51	74.00	28.49	Peak
@ 2416.450	28.17	5.75	39.88	106.34	100.38	---	---	Peak

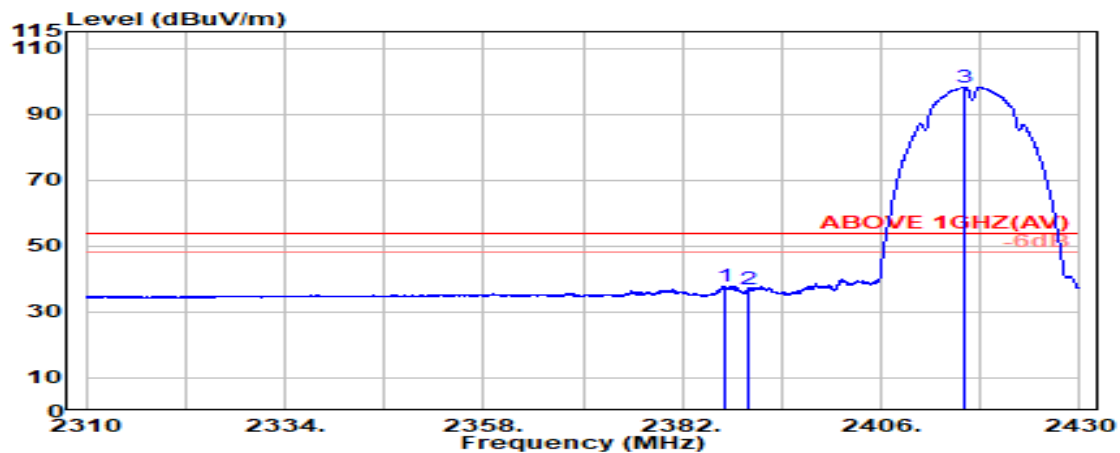

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.250	28.15	5.72	39.88	43.95	37.94	54.00	16.06	Average
2390.000	28.14	5.72	39.88	42.93	36.91	54.00	17.09	Average
@ 2416.200	28.17	5.75	39.88	104.22	98.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

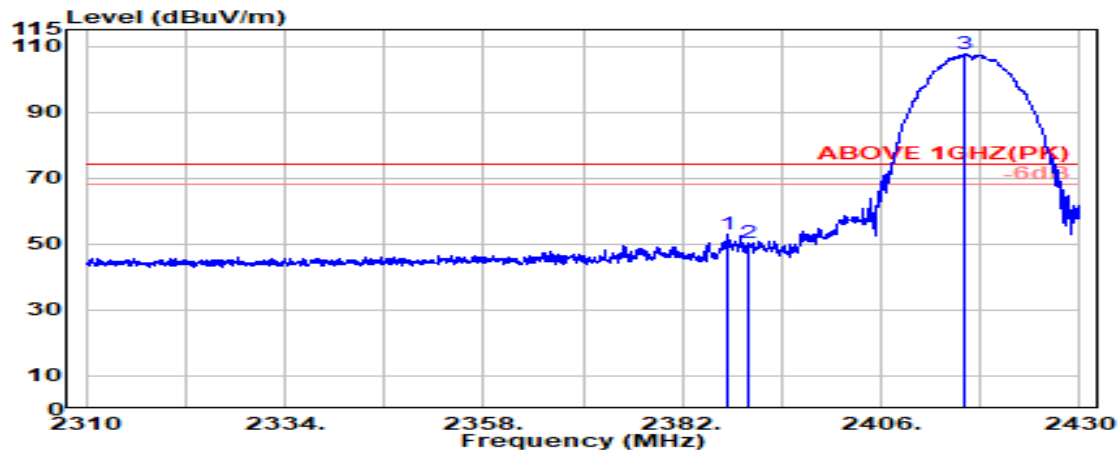

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.500	28.15	5.72	39.88	58.81	52.80	74.00	21.20	Peak
2390.000	28.14	5.72	39.88	56.45	50.43	74.00	23.57	Peak
@ 2416.100	28.16	5.75	39.88	113.64	107.68	---	---	Peak

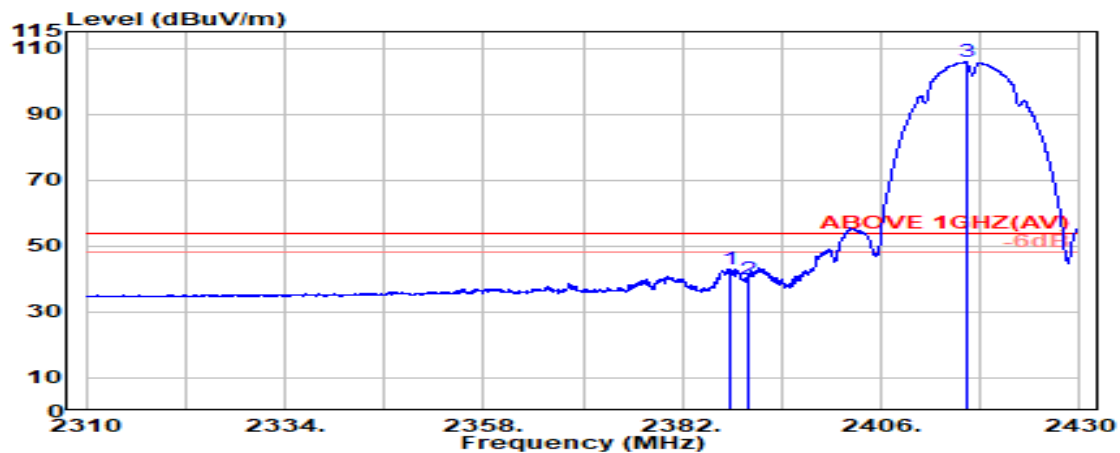

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.650	28.15	5.72	39.88	49.04	43.03	54.00	10.97	Average
2390.000	28.14	5.72	39.88	45.98	39.97	54.00	14.03	Average
@ 2416.250	28.17	5.75	39.88	111.81	105.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

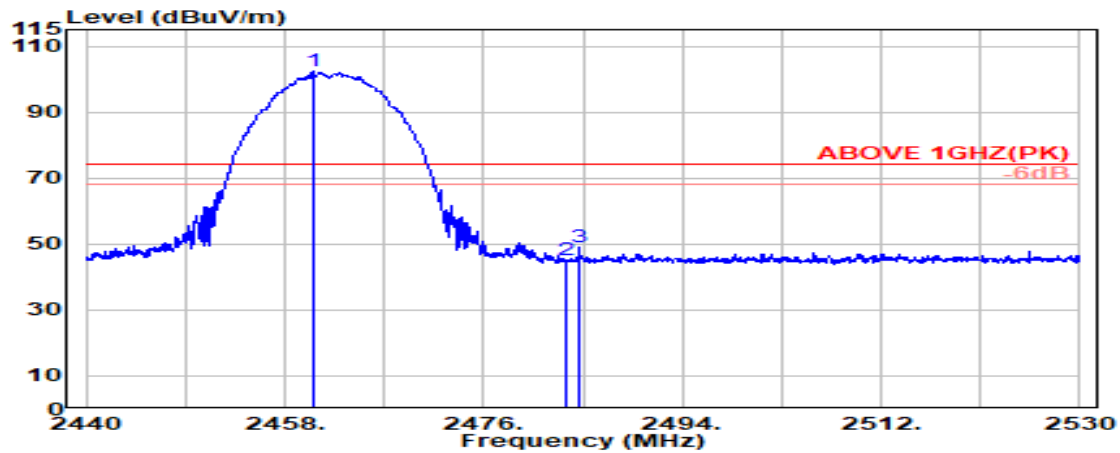

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.500	28.32	5.80	39.87	108.28	102.53	---	---	Peak
	2483.500	28.37	5.83	39.87	50.96	45.29	74.00	28.71	Peak
	2484.600	28.37	5.83	39.87	54.91	49.24	74.00	24.76	Peak

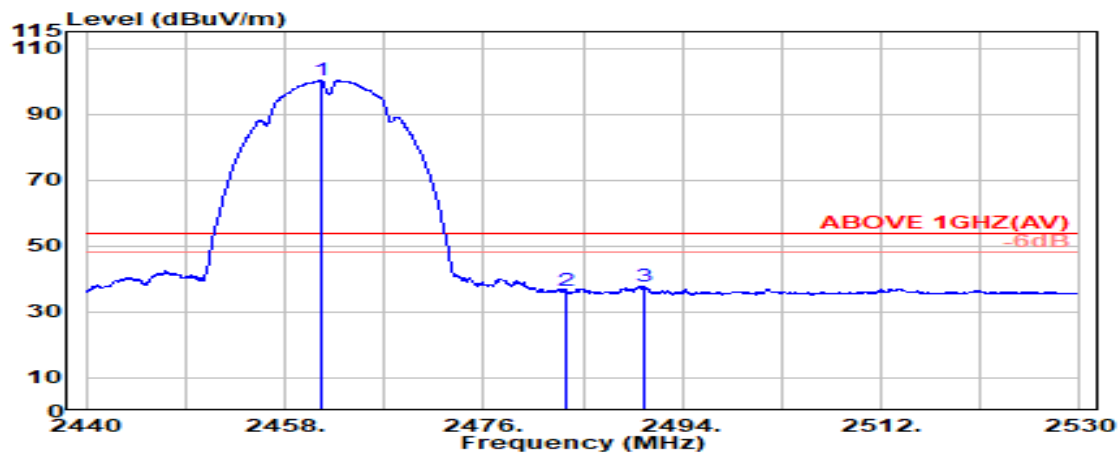

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.200	28.32	5.81	39.87	105.98	100.23	---	---	Average
	2483.500	28.37	5.83	39.87	42.29	36.62	54.00	17.38	Average
	2490.600	28.38	5.84	39.87	43.55	37.90	54.00	16.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

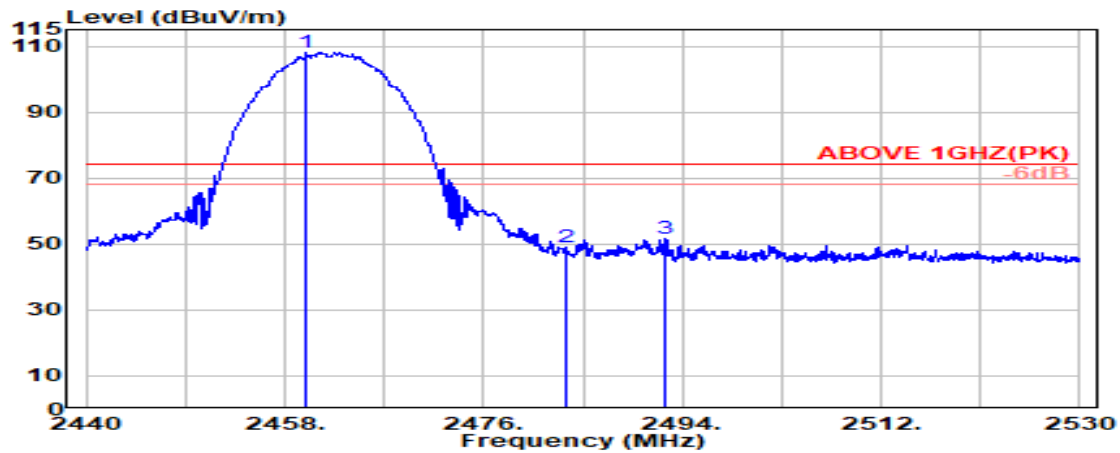

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.000	28.32	5.80	39.87	113.96	108.21	---	---	Peak
	2483.500	28.37	5.83	39.87	54.90	49.23	74.00	24.77	Peak
	2492.500	28.39	5.84	39.87	57.17	51.53	74.00	22.47	Peak

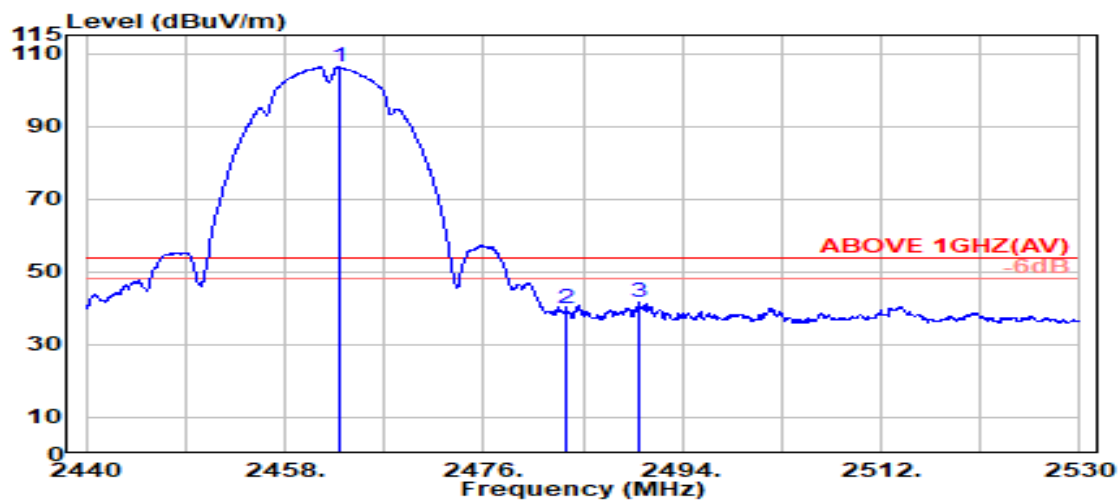

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.850	28.33	5.81	39.87	111.88	106.14	---	---	Average
	2483.500	28.37	5.83	39.87	45.77	40.09	54.00	13.91	Average
	2490.050	28.38	5.84	39.87	47.27	41.61	54.00	12.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

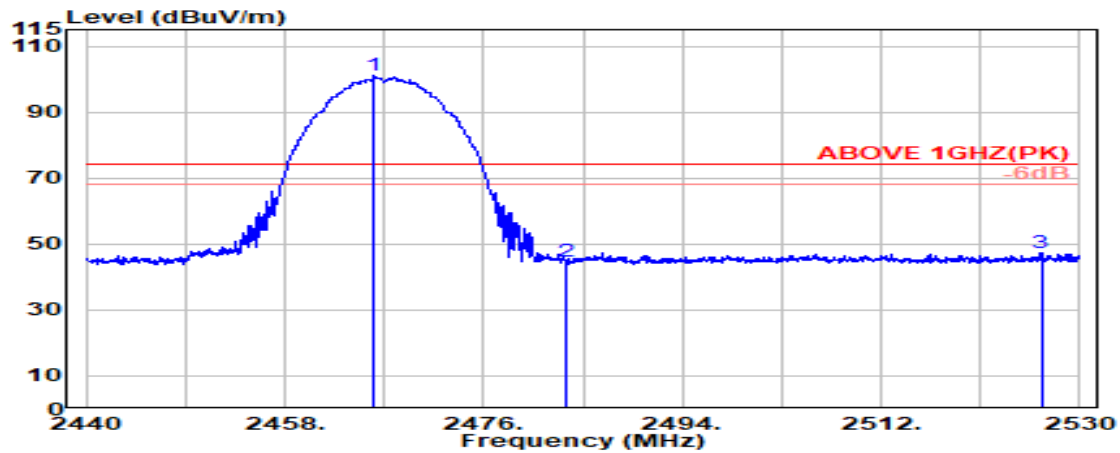

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2466.100	28.33	5.81	39.87	106.65	100.92	---	---	Peak
	2483.500	28.37	5.83	39.87	50.53	44.86	74.00	29.14	Peak
	2526.500	28.56	5.88	39.88	52.92	47.49	74.00	26.51	Peak

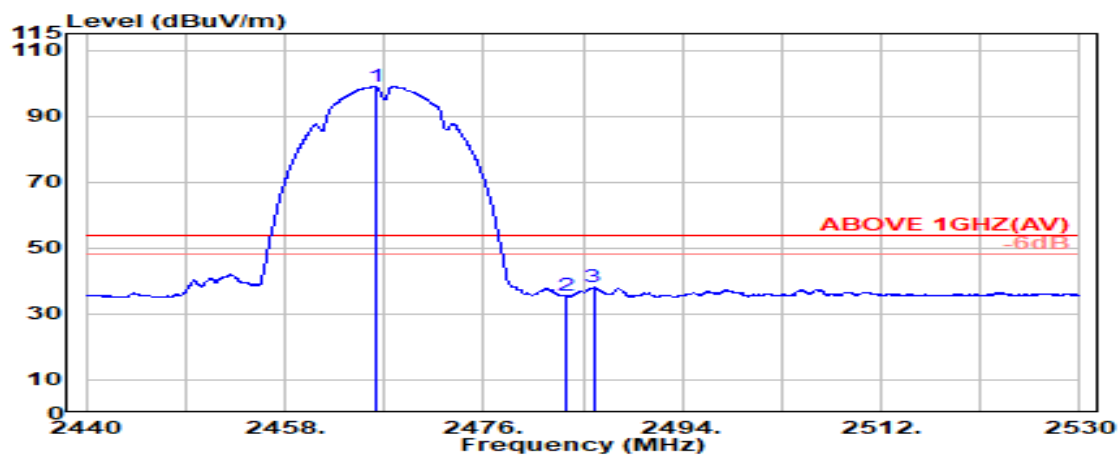

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2466.250	28.33	5.81	39.87	104.80	99.07	---	---	Average
	2483.500	28.37	5.83	39.87	41.05	35.38	54.00	18.62	Average
	2485.950	28.37	5.83	39.87	43.66	37.99	54.00	16.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

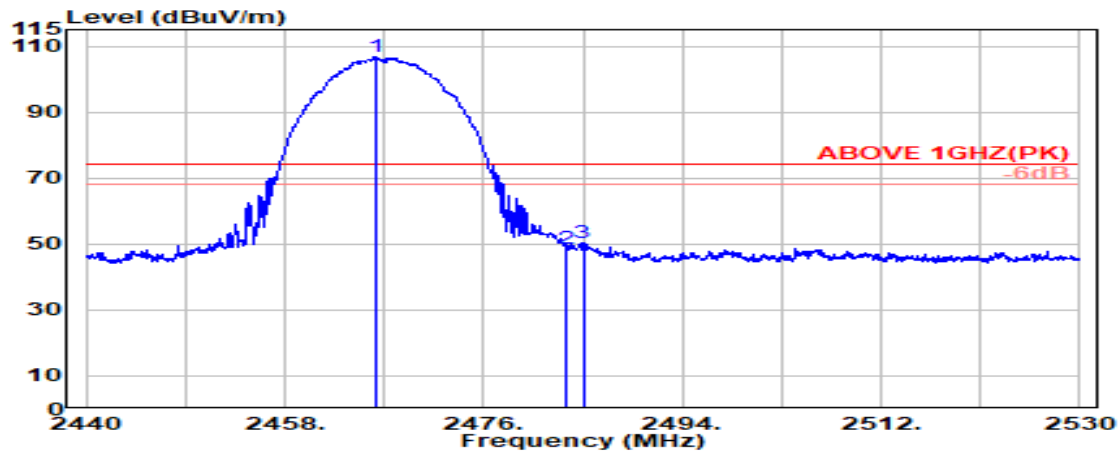

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.150	28.33	5.81	39.87	112.31	106.59	---	---	Peak
2483.500	28.37	5.83	39.87	54.34	48.67	74.00	25.33	Peak
2485.000	28.37	5.83	39.87	56.20	50.54	74.00	23.46	Peak

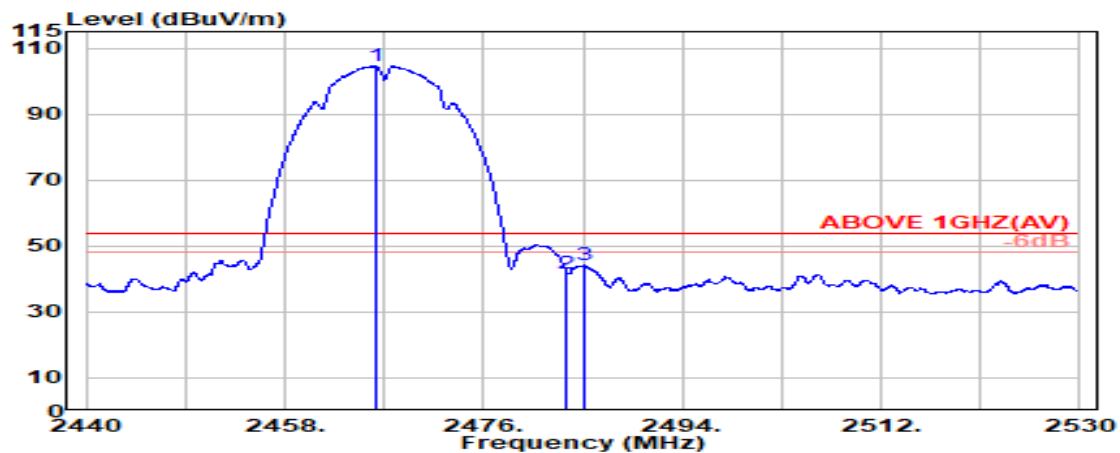

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.200	28.33	5.81	39.87	110.42	104.69	---	---	Average
2483.500	28.37	5.83	39.87	47.21	41.54	54.00	12.46	Average
2485.150	28.37	5.83	39.87	49.79	44.12	54.00	9.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

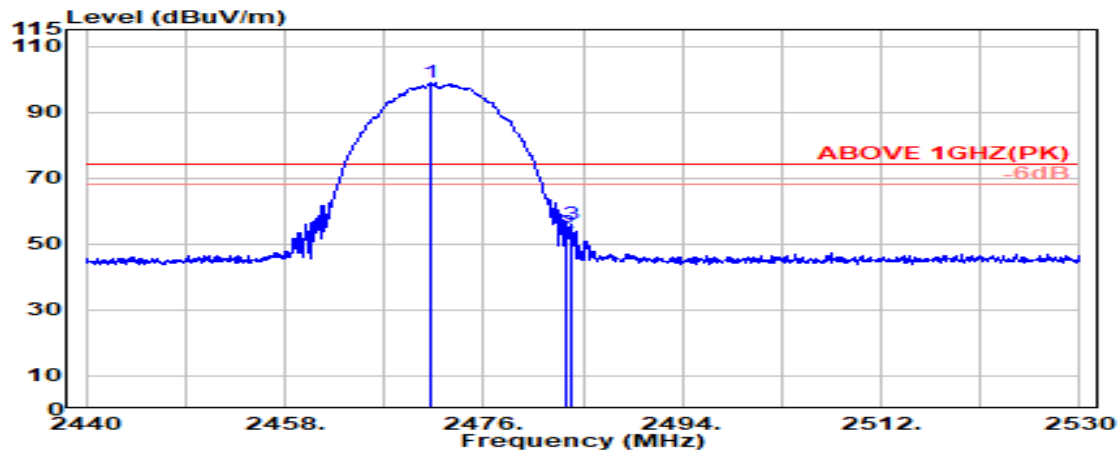

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2471.200	28.34	5.82	39.87	104.80	99.09	---	---	Peak
	2483.500	28.37	5.83	39.87	58.93	53.25	74.00	20.75	Peak
	2483.950	28.37	5.83	39.87	61.70	56.03	74.00	17.97	Peak

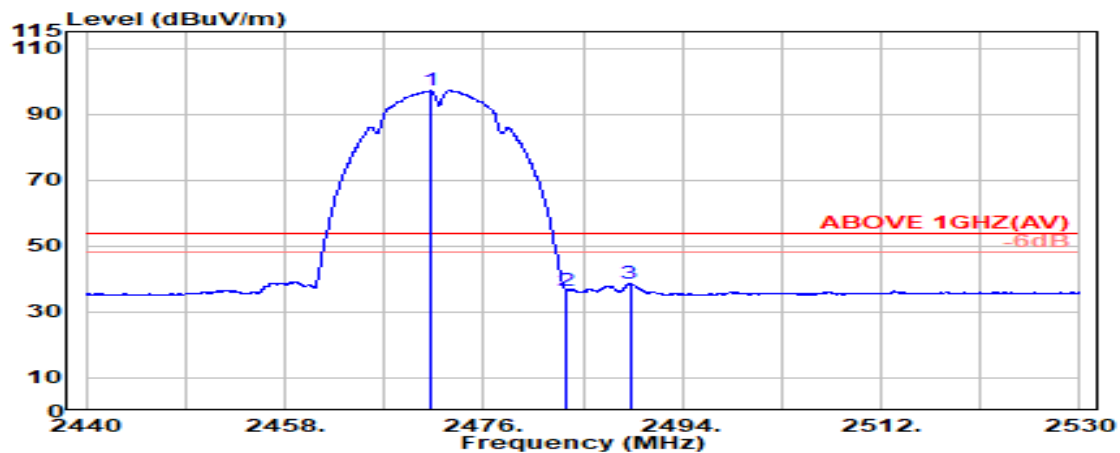

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2471.300	28.34	5.82	39.87	102.82	97.11	---	---	Average
	2483.500	28.37	5.83	39.87	42.32	36.65	54.00	17.35	Average
	2489.250	28.38	5.84	39.87	44.35	38.69	54.00	15.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

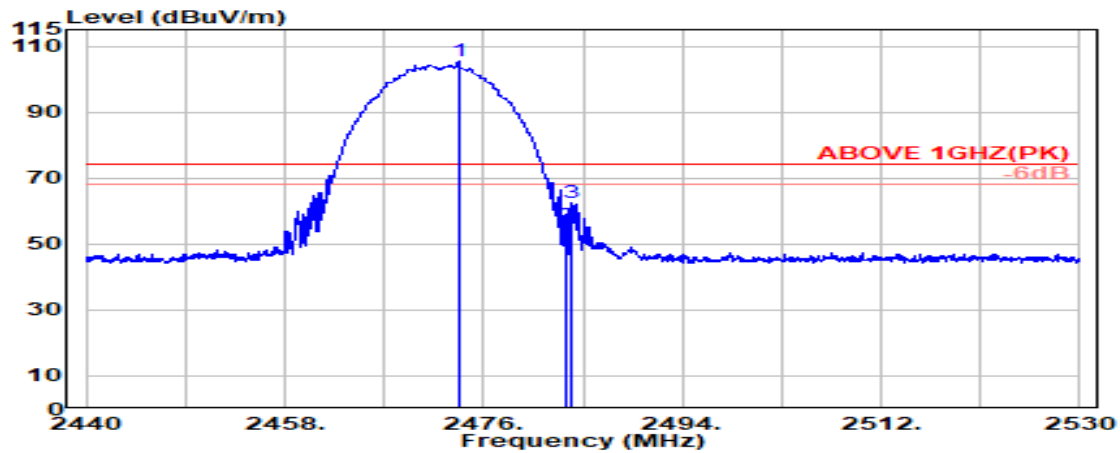

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.700	28.35	5.82	39.87	111.26	105.56	---	---	Peak
2483.500	28.37	5.83	39.87	61.38	55.71	74.00	18.29	Peak
2483.900	28.37	5.83	39.87	68.15	62.48	74.00	11.52	Peak

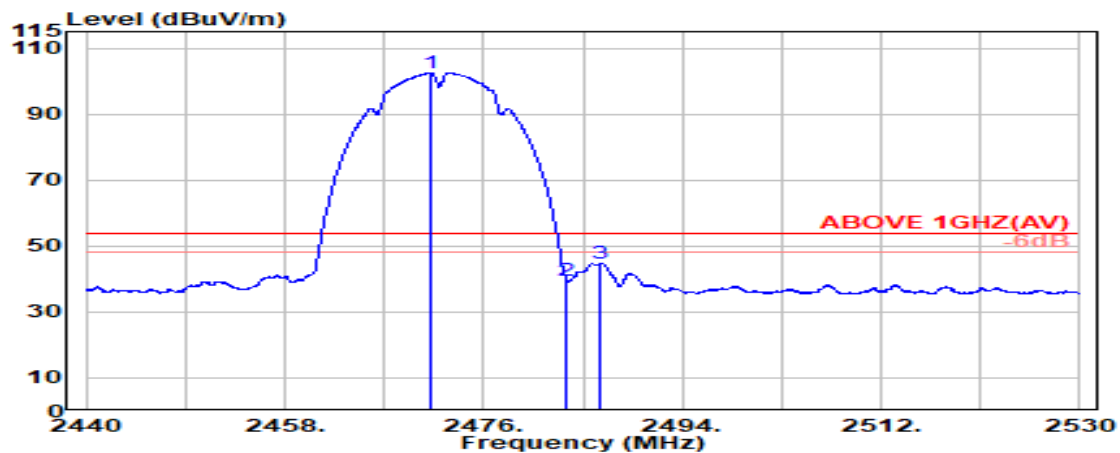

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.250	28.34	5.82	39.87	108.27	102.56	---	---	Average
2483.500	28.37	5.83	39.87	45.30	39.62	54.00	14.38	Average
2486.650	28.37	5.83	39.87	50.36	44.70	54.00	9.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

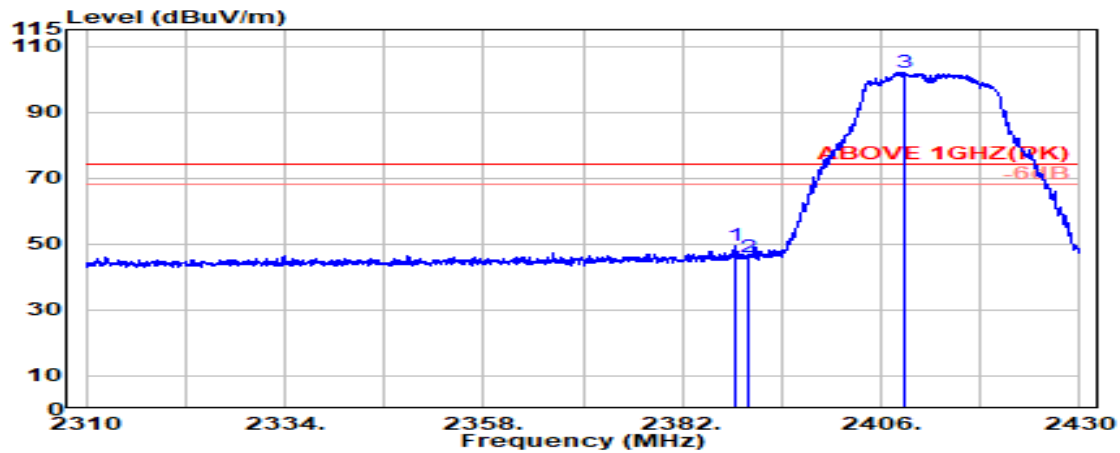

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	55.69	49.68	74.00	24.32	Peak
2390.000	28.14	5.72	39.88	51.97	45.95	74.00	28.05	Peak
@ 2408.700	28.14	5.74	39.88	108.14	102.15	---	---	Peak

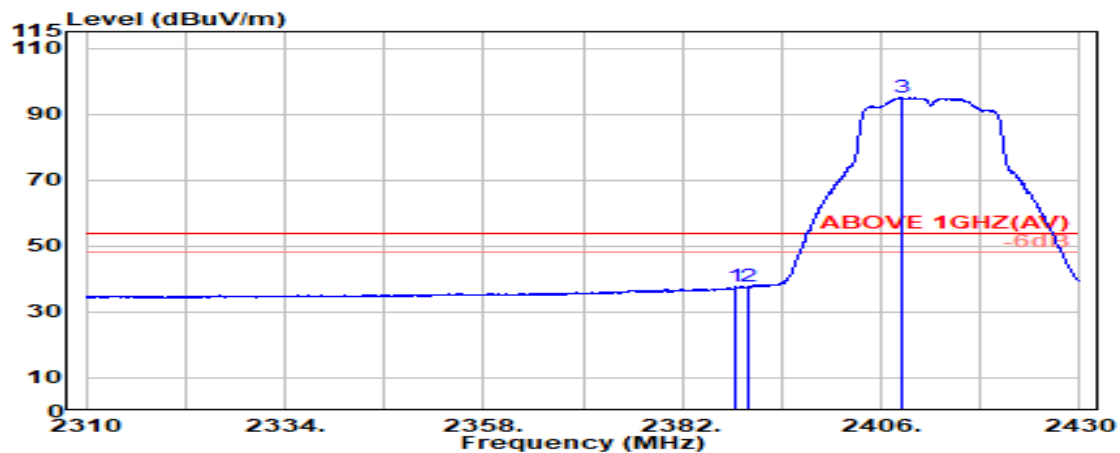

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	43.77	37.76	54.00	16.24	Average
2390.000	28.14	5.72	39.88	43.69	37.68	54.00	16.32	Average
@ 2408.500	28.13	5.74	39.88	100.95	94.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

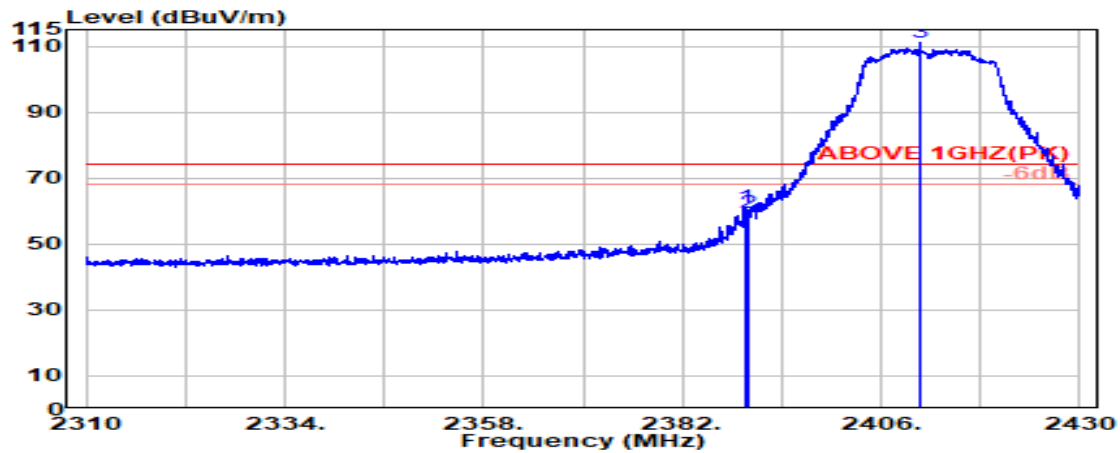

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	67.16	61.14	74.00	12.86	Peak
2390.000	28.14	5.72	39.88	65.45	59.43	74.00	14.57	Peak
@ 2410.750	28.14	5.75	39.88	116.87	110.88	---	---	Peak

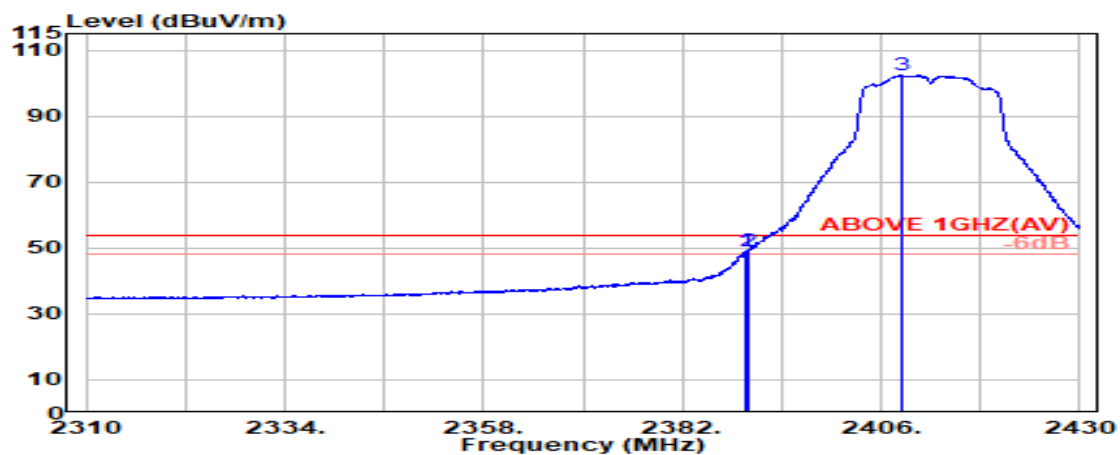

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	55.25	49.24	54.00	4.76	Average
2390.000	28.14	5.72	39.88	55.08	49.06	54.00	4.94	Average
@ 2408.400	28.13	5.74	39.88	108.35	102.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

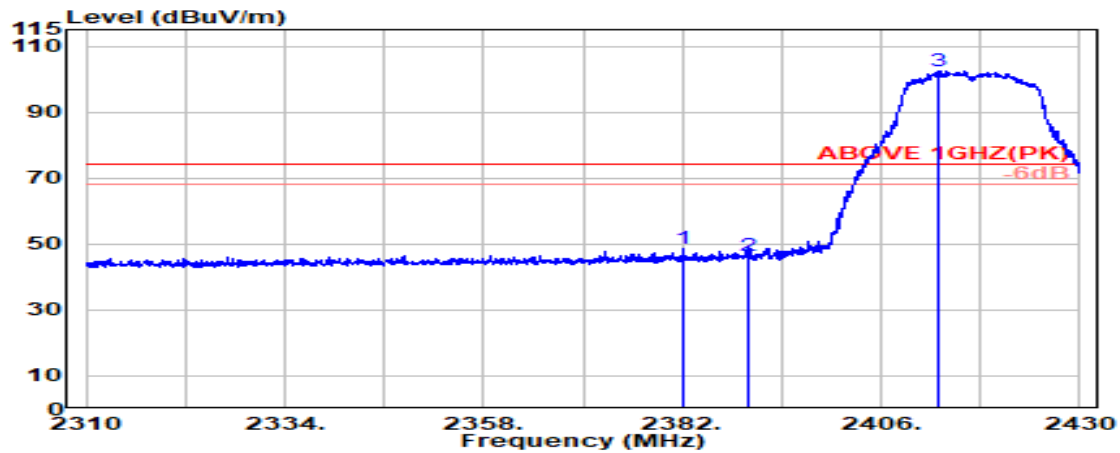

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2382.200	28.17	5.71	39.88	54.44	48.44	74.00	25.56	Peak
2390.000	28.14	5.72	39.88	52.28	46.26	74.00	27.74	Peak
@ 2412.850	28.15	5.75	39.88	108.58	102.61	---	---	Peak

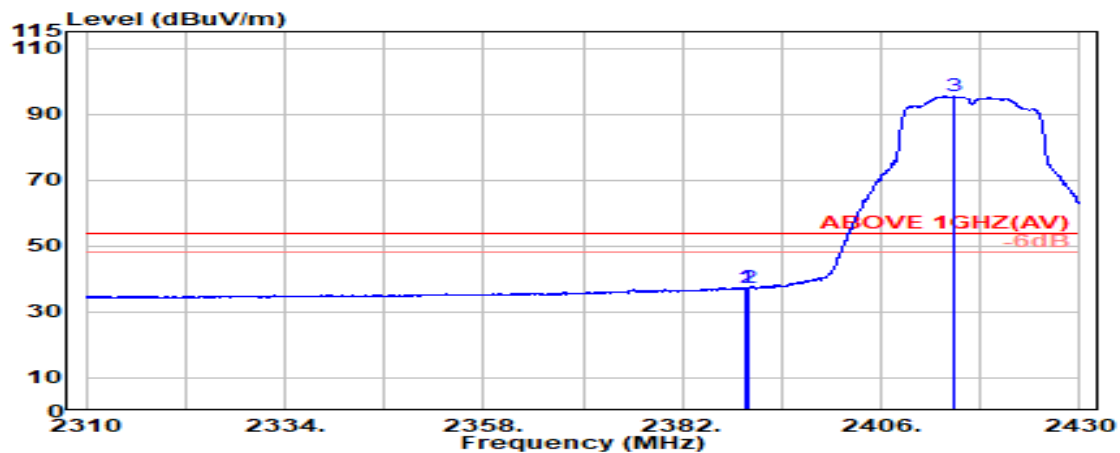

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	43.50	37.48	54.00	16.52	Average
2390.000	28.14	5.72	39.88	43.25	37.23	54.00	16.77	Average
@ 2414.800	28.16	5.75	39.88	101.26	95.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

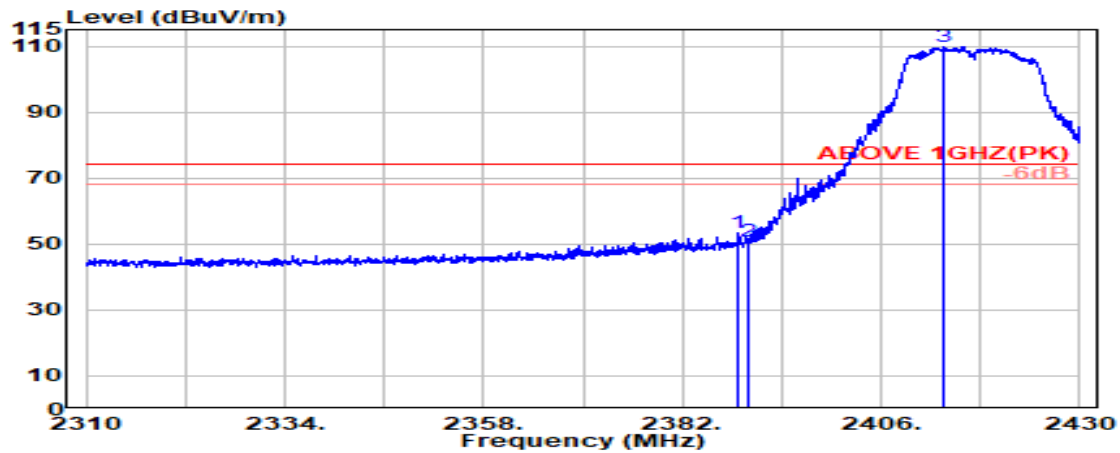

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	59.60	53.59	74.00	20.41	Peak
2390.000	28.14	5.72	39.88	56.77	50.75	74.00	23.25	Peak
@ 2413.450	28.15	5.75	39.88	115.76	109.78	---	---	Peak

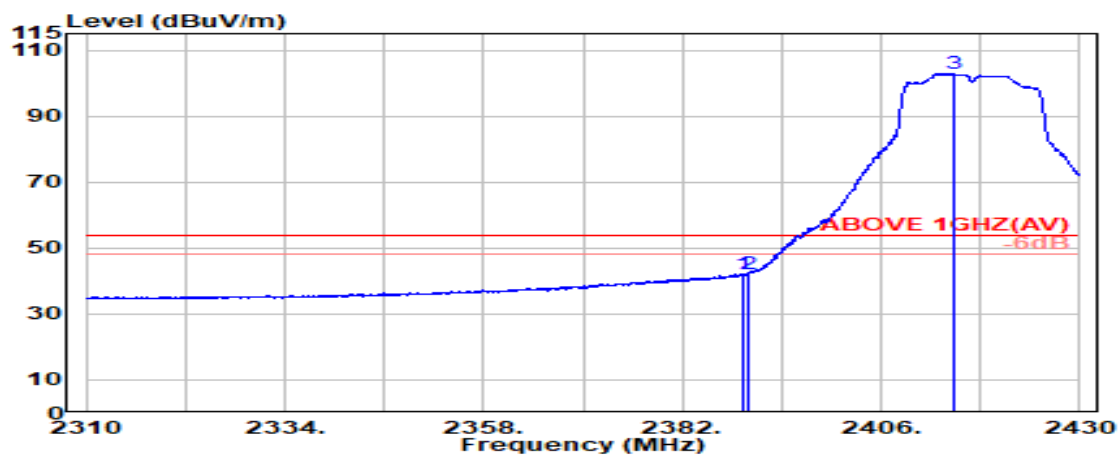

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	48.18	42.17	54.00	11.83	Average
2390.000	28.14	5.72	39.88	48.27	42.26	54.00	11.74	Average
@ 2414.750	28.16	5.75	39.88	108.80	102.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

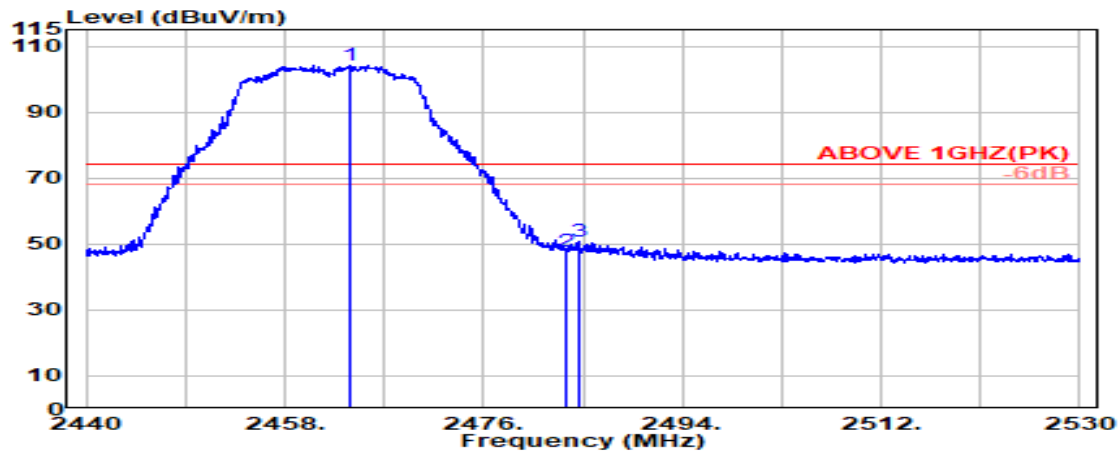

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.800	28.33	5.81	39.87	109.93	104.19	---	---	Peak
	2483.500	28.37	5.83	39.87	53.28	47.61	74.00	26.39	Peak
	2484.650	28.37	5.83	39.87	56.46	50.79	74.00	23.21	Peak

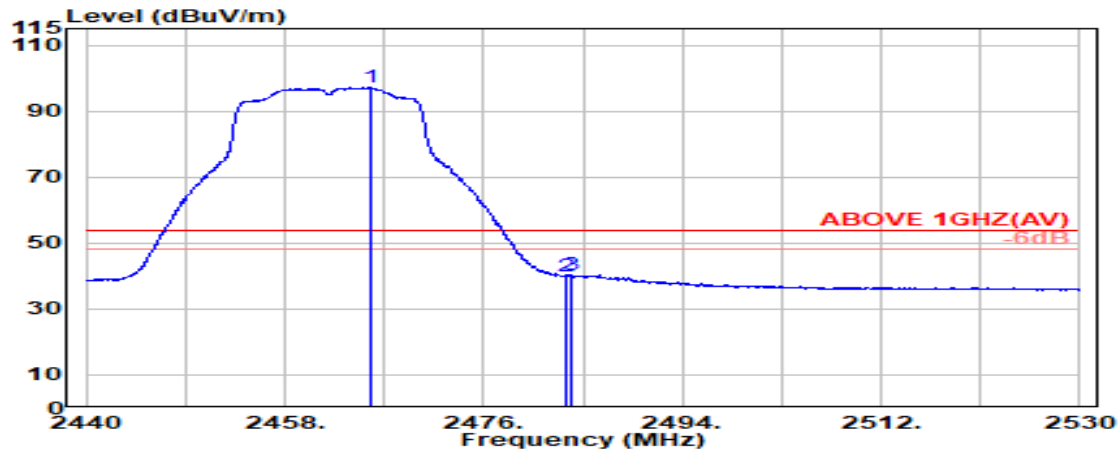

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.750	28.33	5.81	39.87	102.88	97.14	---	---	Average
	2483.500	28.37	5.83	39.87	45.71	40.04	54.00	13.96	Average
	2483.900	28.37	5.83	39.87	46.07	40.39	54.00	13.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

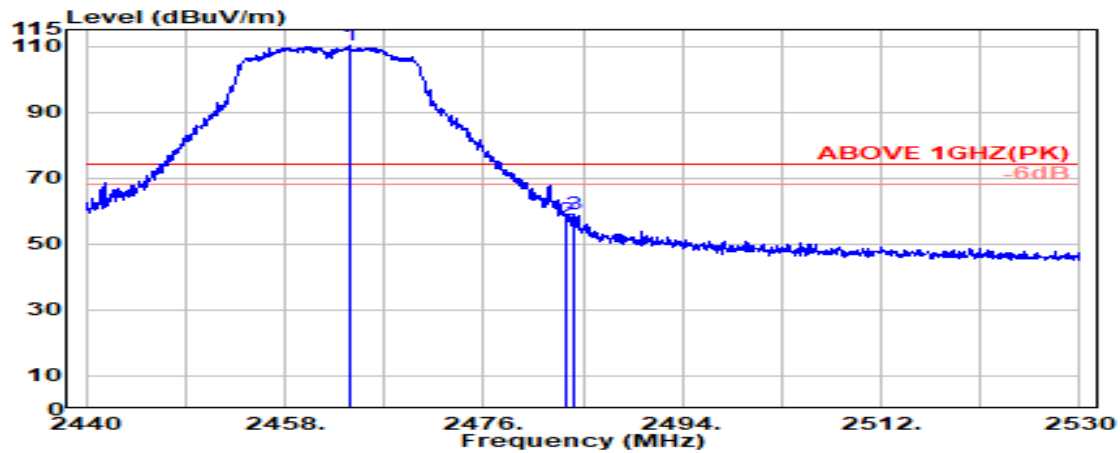

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.33	5.81	39.87	115.78	110.05	---	---	Peak
2483.500	28.37	5.83	39.87	62.79	57.12	74.00	16.88	Peak
2484.200	28.37	5.83	39.87	64.63	58.96	74.00	15.04	Peak

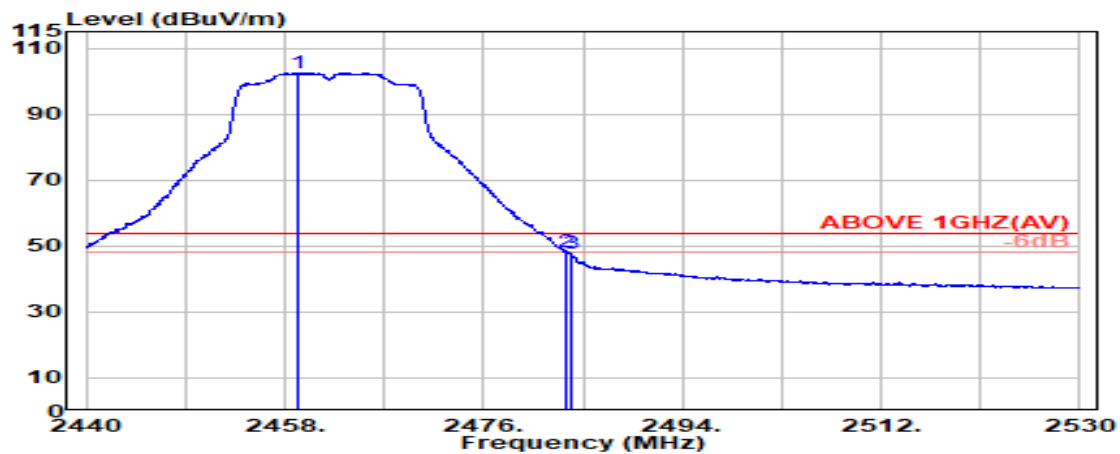

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.32	5.80	39.87	108.12	102.37	---	---	Average
2483.500	28.37	5.83	39.87	53.78	48.11	54.00	5.89	Average
2483.850	28.37	5.83	39.87	53.40	47.72	54.00	6.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

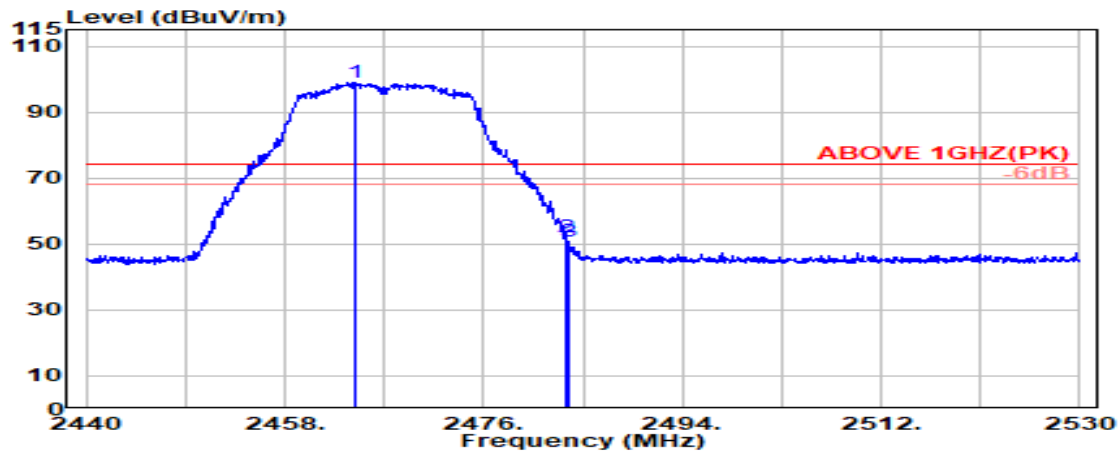

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.33	5.81	39.87	104.62	98.89	---	---	Peak
2483.500	28.37	5.83	39.87	57.63	51.95	74.00	22.05	Peak
2483.700	28.37	5.83	39.87	56.23	50.56	74.00	23.44	Peak

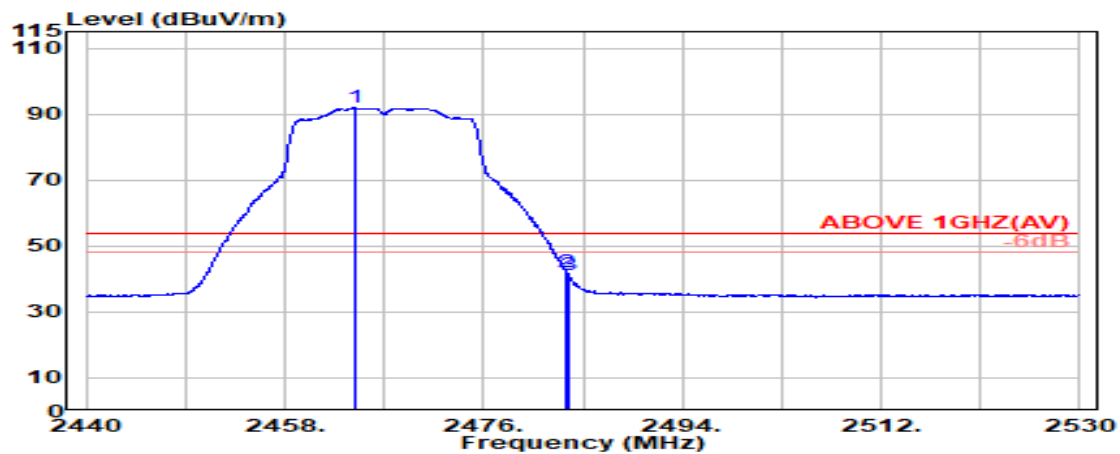

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.33	5.81	39.87	97.56	91.83	---	---	Average
2483.500	28.37	5.83	39.87	47.61	41.94	54.00	12.06	Average
2483.700	28.37	5.83	39.87	46.74	41.07	54.00	12.93	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

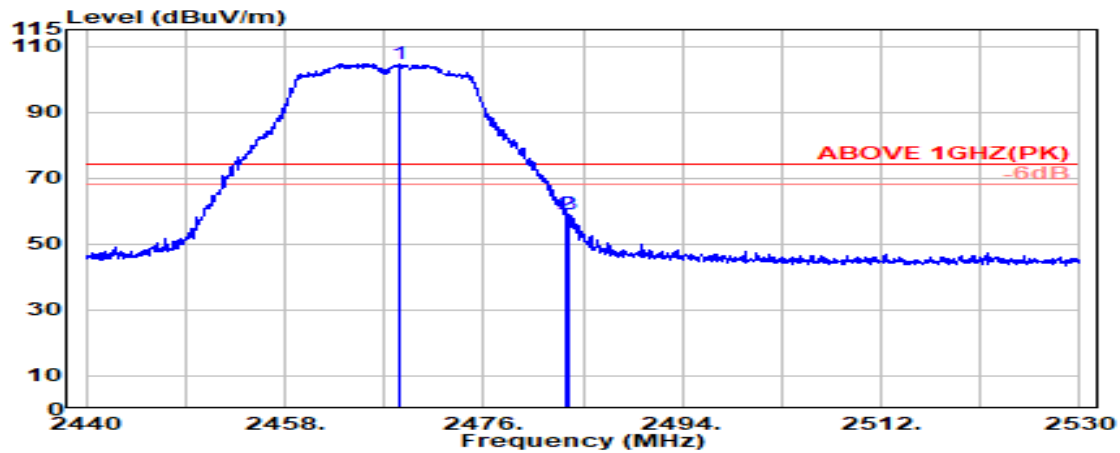

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.350	28.34	5.81	39.87	110.40	104.68	---	---	Peak
2483.500	28.37	5.83	39.87	64.90	59.23	74.00	14.77	Peak
2483.700	28.37	5.83	39.87	64.70	59.03	74.00	14.97	Peak

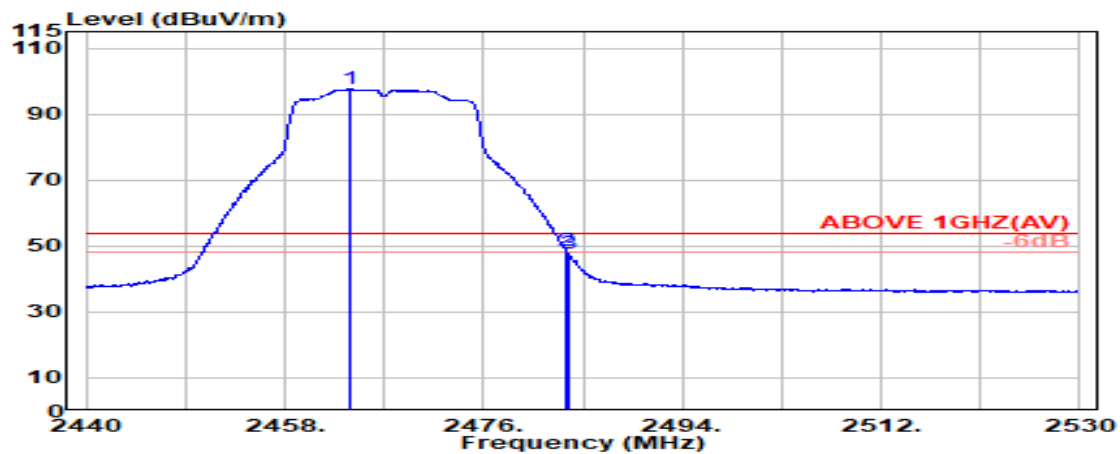

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.33	5.81	39.87	103.31	97.58	---	---	Average
2483.500	28.37	5.83	39.87	54.15	48.48	54.00	5.52	Average
2483.700	28.37	5.83	39.87	53.20	47.52	54.00	6.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

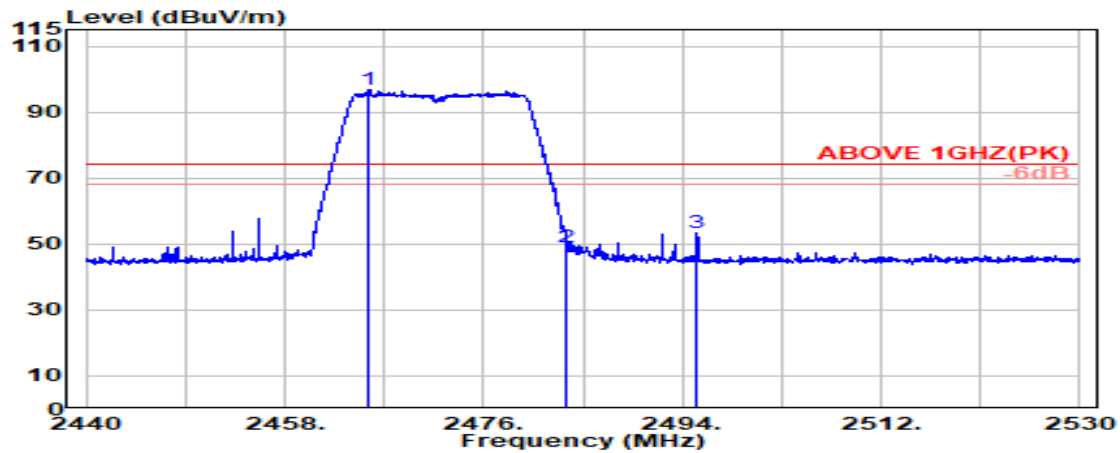

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.500	28.33	5.81	39.87	102.64	96.91	---	---	Peak
	2483.500	28.37	5.83	39.87	54.77	49.09	74.00	24.91	Peak
	2495.350	28.39	5.84	39.87	58.98	53.34	74.00	20.66	Peak

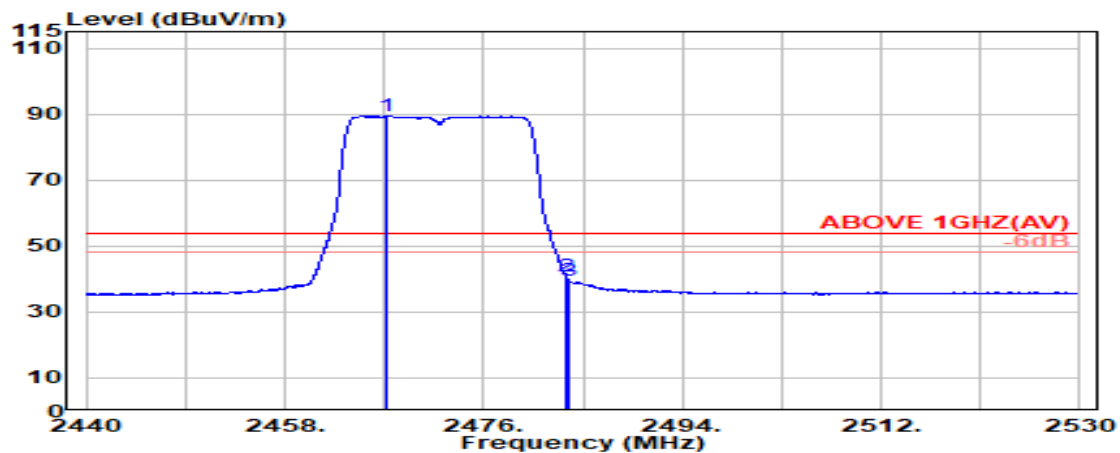

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.300	28.33	5.81	39.87	95.19	89.46	---	---	Average
	2483.500	28.37	5.83	39.87	46.25	40.58	54.00	13.42	Average
	2483.700	28.37	5.83	39.87	45.19	39.51	54.00	14.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

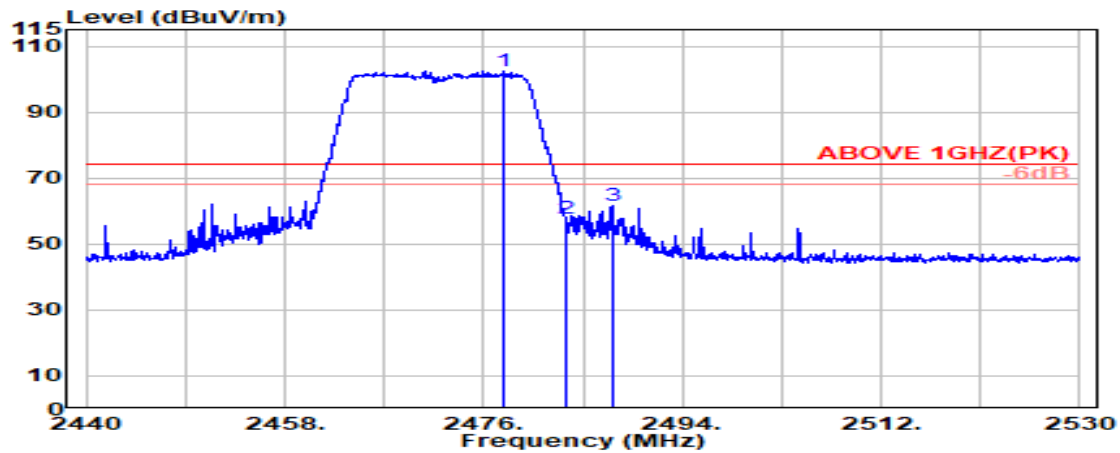

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.800	28.36	5.82	39.87	108.22	102.53	---	---	Peak
2483.500	28.37	5.83	39.87	63.36	57.68	74.00	16.32	Peak
2487.700	28.38	5.84	39.87	67.42	61.76	74.00	12.24	Peak

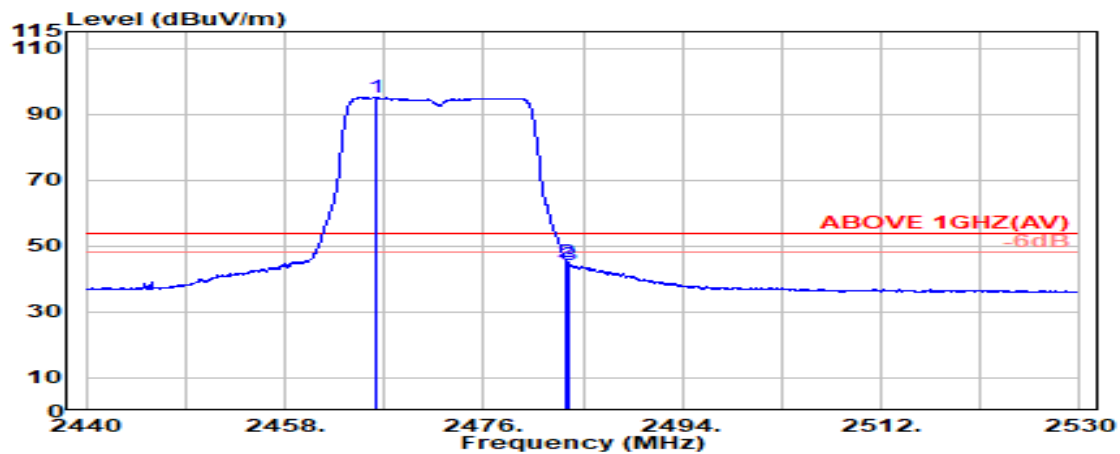

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.150	28.33	5.81	39.87	100.74	95.01	---	---	Average
2483.500	28.37	5.83	39.87	50.98	45.31	54.00	8.69	Average
2483.700	28.37	5.83	39.87	49.81	44.14	54.00	9.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

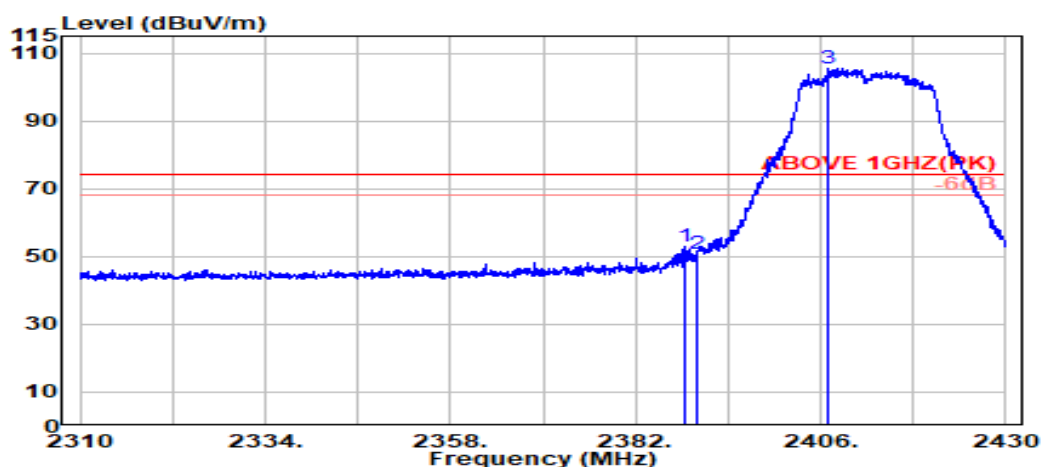

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.450	28.15	5.72	39.88	58.96	52.95	74.00	21.05	Peak
2390.000	28.14	5.72	39.88	56.85	50.84	74.00	23.16	Peak
@ 2406.900	28.13	5.74	39.88	111.63	105.62	---	---	Peak

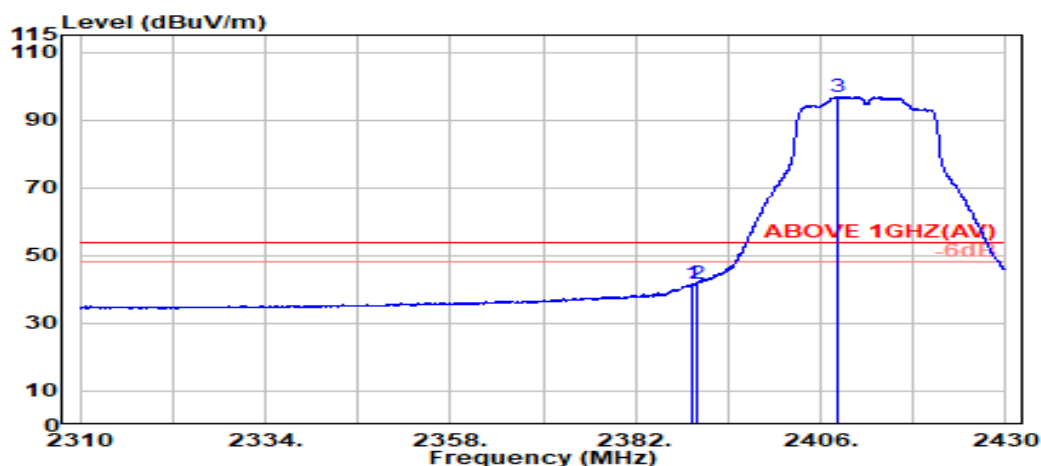

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	47.68	41.66	54.00	12.34	Average
2390.000	28.14	5.72	39.88	47.53	41.51	54.00	12.49	Average
@ 2408.250	28.13	5.74	39.88	102.97	96.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

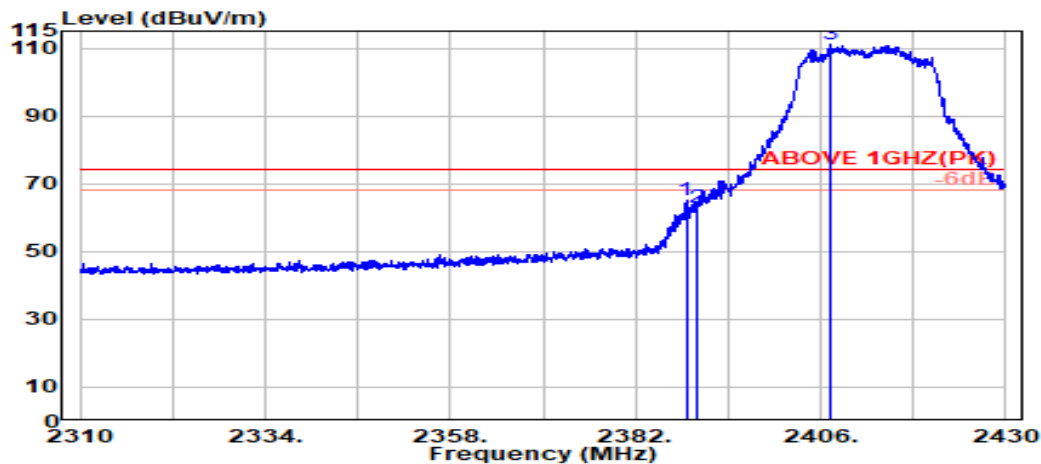

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.15	5.72	39.88	70.90	64.88	74.00	9.12	Peak
2390.000	28.14	5.72	39.88	69.16	63.14	74.00	10.86	Peak
@ 2407.400	28.13	5.74	39.88	117.06	111.05	---	---	Peak

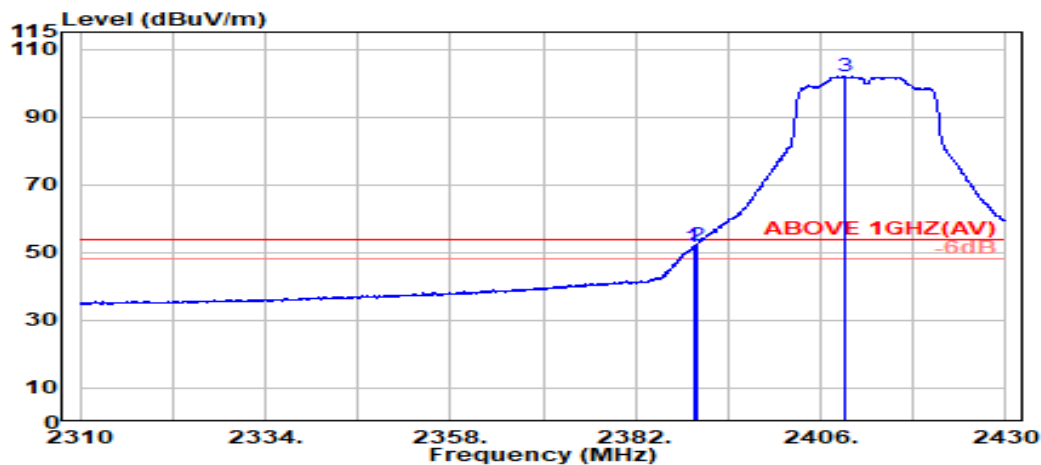


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	57.61	51.59	54.00	2.41	Average
2390.000	28.14	5.72	39.88	58.31	52.29	54.00	1.71	Average
@ 2409.050	28.14	5.74	39.88	108.10	102.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

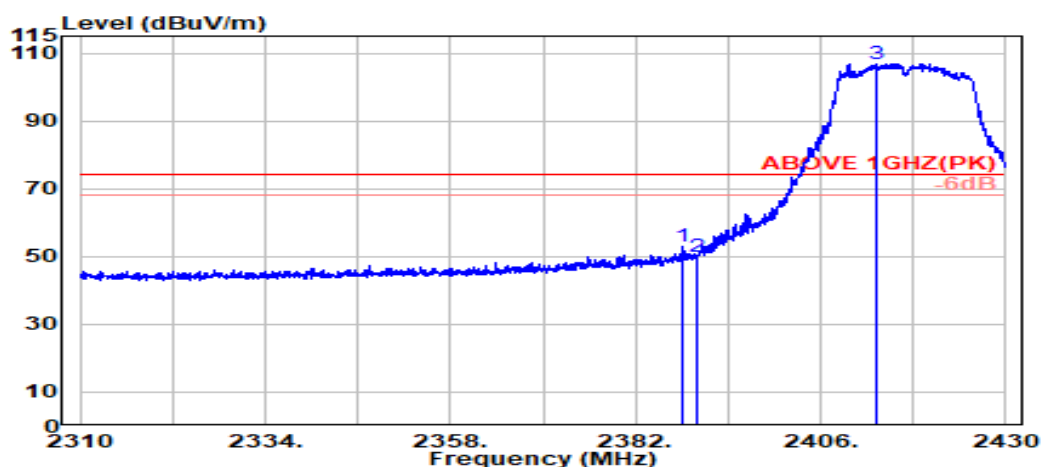

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	28.15	5.72	39.88	59.00	52.99	74.00	21.01	Peak
2390.000	28.14	5.72	39.88	55.80	49.79	74.00	24.21	Peak
@ 2413.250	28.15	5.75	39.88	112.89	106.92	---	---	Peak

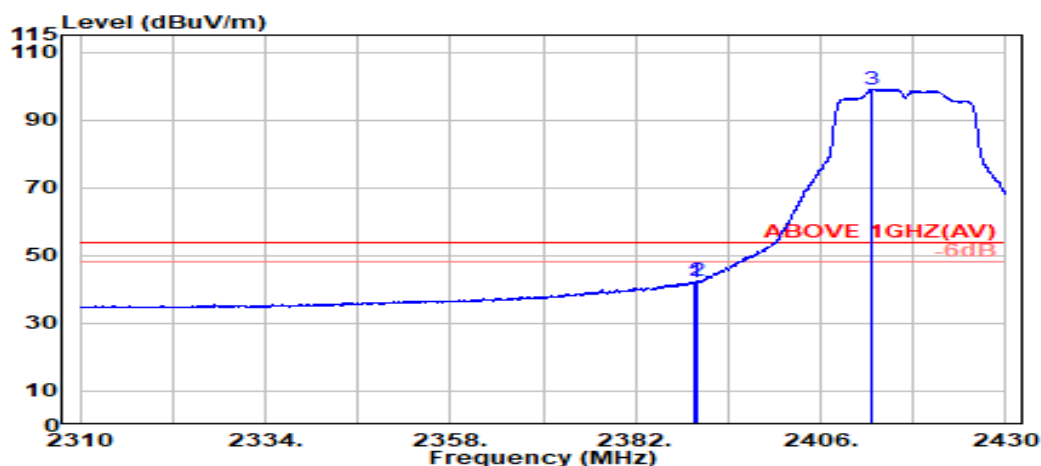

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	48.13	42.12	54.00	11.88	Average
2390.000	28.14	5.72	39.88	48.34	42.33	54.00	11.67	Average
@ 2412.550	28.15	5.75	39.88	105.05	99.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

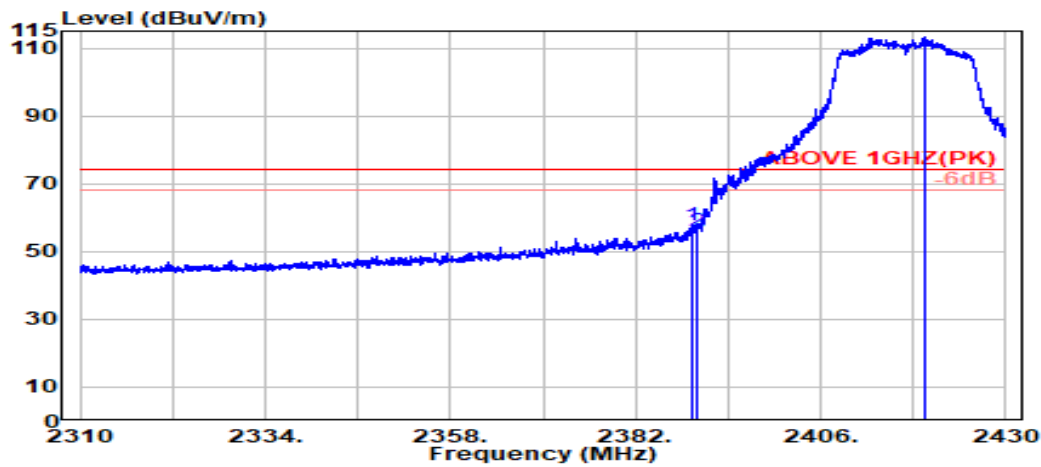

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	63.56	57.55	74.00	16.45	Peak
2390.000	28.14	5.72	39.88	61.99	55.97	74.00	18.03	Peak
@ 2419.550	28.18	5.76	39.88	119.19	113.25	---	---	Peak

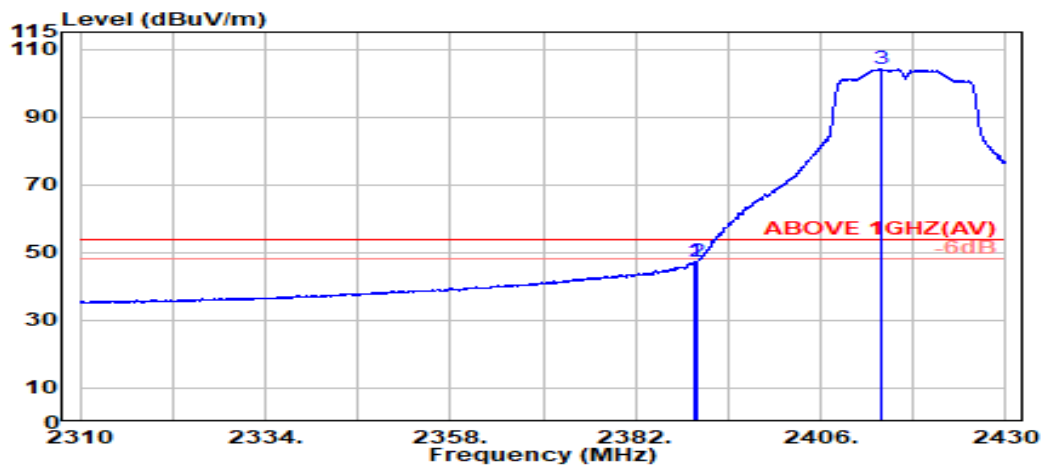

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	53.17	47.16	54.00	6.84	Average
2390.000	28.14	5.72	39.88	53.40	47.39	54.00	6.61	Average
@ 2413.750	28.16	5.75	39.88	110.01	104.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

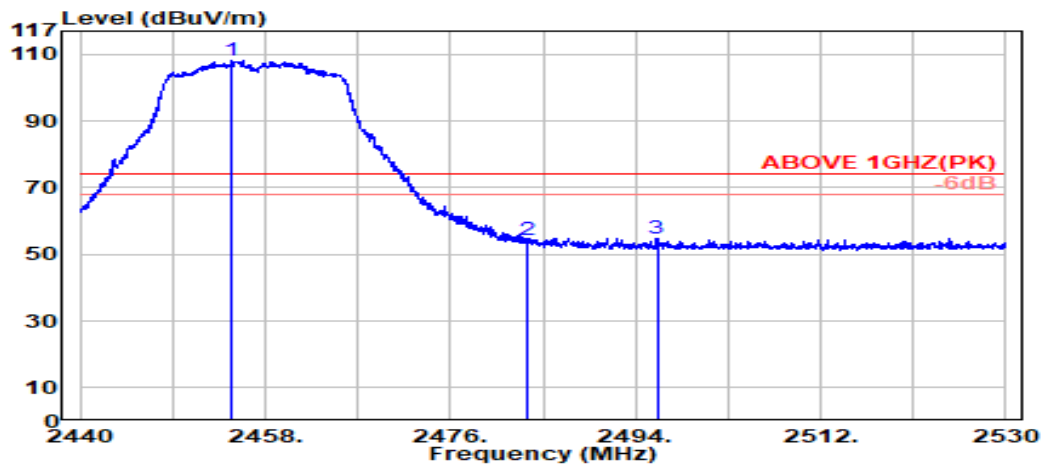

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.723	28.31	5.80	39.87	114.02	108.25	---	---	Peak
2483.500	28.37	5.83	39.87	60.10	54.43	74.00	19.57	Peak
2496.083	28.39	5.85	39.87	60.50	54.87	74.00	19.13	Peak

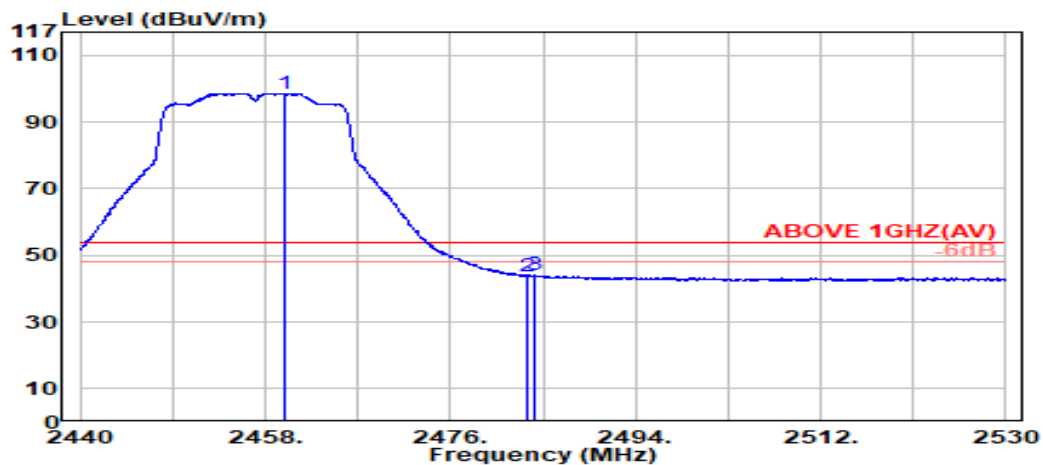

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.967	28.32	5.80	39.87	104.40	98.65	---	---	Average
2483.500	28.37	5.83	39.87	49.46	43.79	54.00	10.21	Average
2484.240	28.37	5.83	39.87	49.70	44.03	54.00	9.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

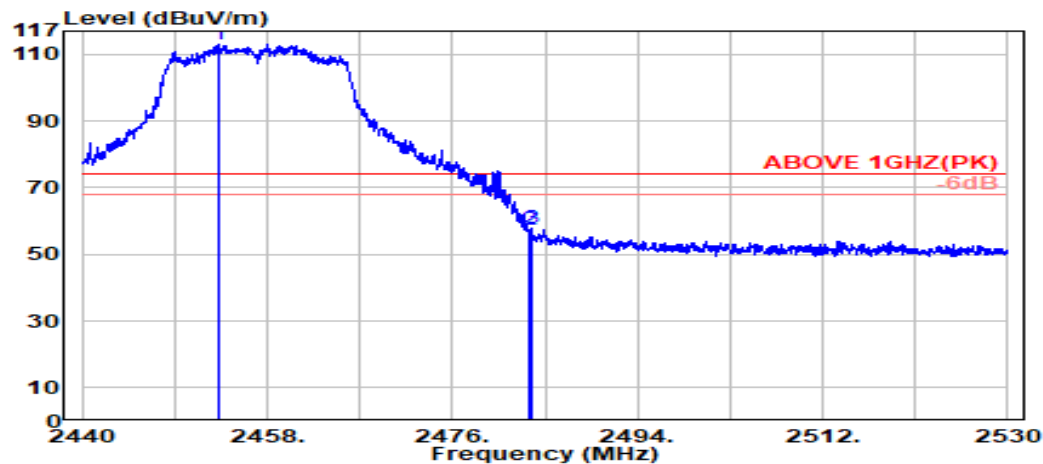

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2453.257	28.31	5.80	39.87	118.96	113.19	---	---	Peak
	2483.500	28.37	5.83	39.87	63.05	57.37	74.00	16.63	Peak
	2483.763	28.37	5.83	39.87	63.42	57.75	74.00	16.25	Peak

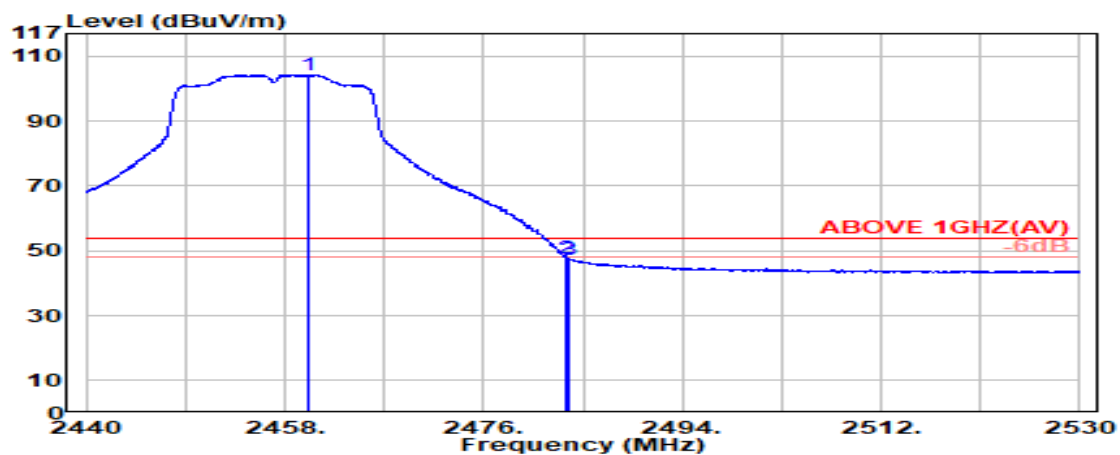

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.040	28.32	5.80	39.87	110.09	104.34	---	---	Peak
	2483.500	28.37	5.83	39.87	53.43	47.76	54.00	6.24	Peak
	2483.763	28.37	5.83	39.87	53.07	47.39	54.00	6.61	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

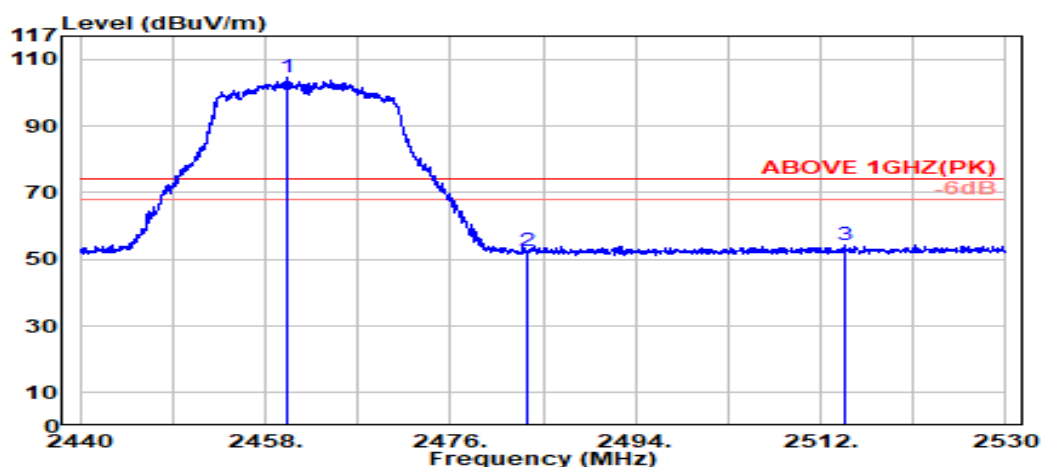

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.200	28.32	5.80	39.87	110.23	104.48	---	---	Peak
	2483.500	28.37	5.83	39.87	58.39	52.72	74.00	21.28	Peak
	2514.300	28.49	5.87	39.87	59.85	54.33	74.00	19.67	Peak

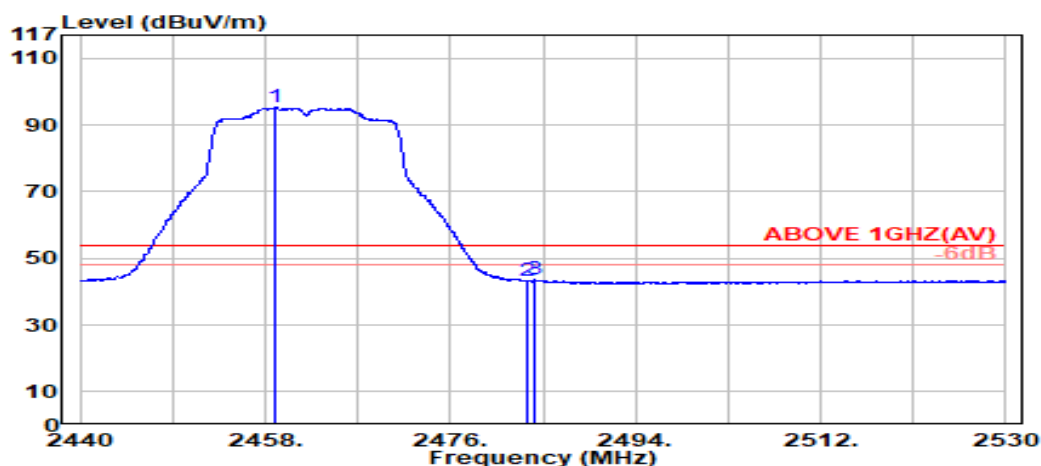

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.000	28.32	5.80	39.87	100.98	95.22	---	---	Average
	2483.500	28.37	5.83	39.87	48.80	43.13	54.00	10.87	Average
	2484.250	28.37	5.83	39.87	49.37	43.70	54.00	10.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

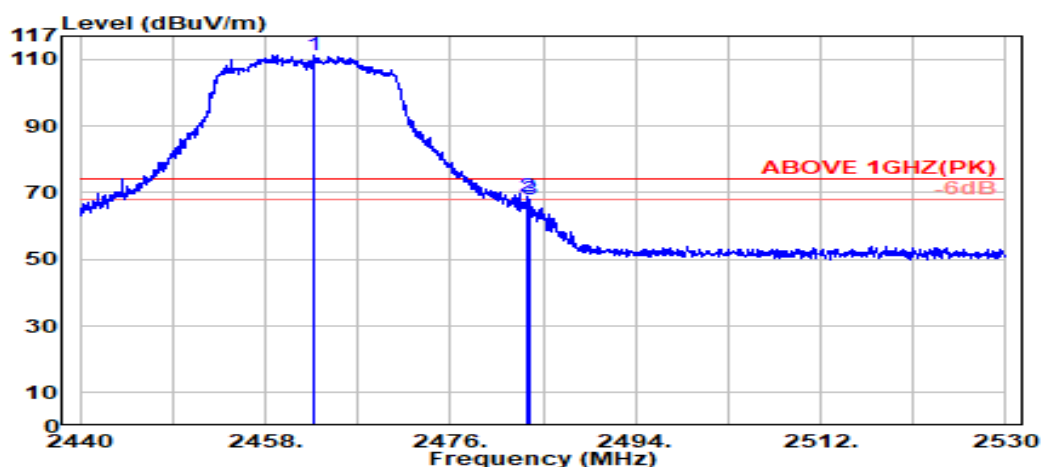

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	28.33	5.81	39.87	116.93	111.20	---	---	Peak
2483.500	28.37	5.83	39.87	74.76	69.09	74.00	4.91	Peak
2483.750	28.37	5.83	39.87	73.55	67.88	74.00	6.12	Peak

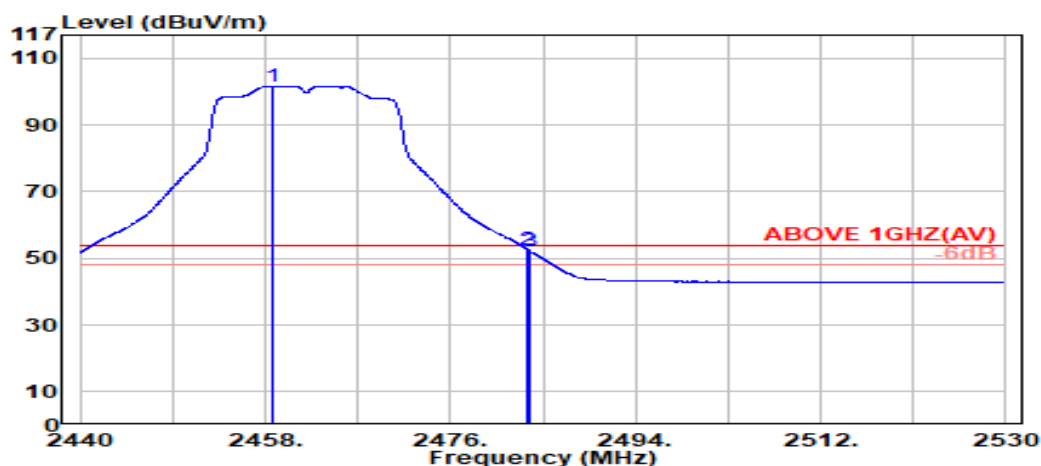

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	28.32	5.80	39.87	107.32	101.57	---	---	Average
2483.500	28.37	5.83	39.87	58.25	52.58	54.00	1.42	Average
2483.700	28.37	5.83	39.87	57.84	52.17	54.00	1.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

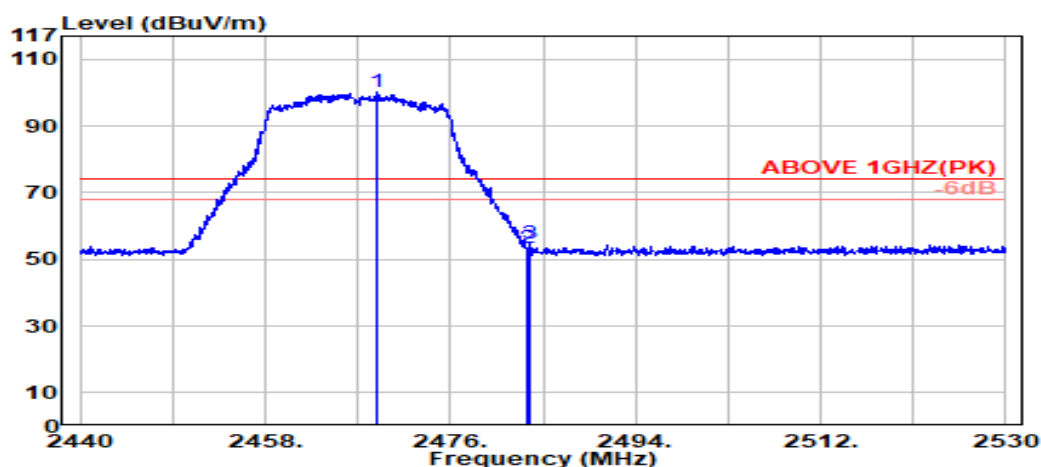

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.850	28.34	5.81	39.87	105.85	100.13	---	---	Peak
	2483.500	28.37	5.83	39.87	59.00	53.33	74.00	20.67	Peak
	2483.750	28.37	5.83	39.87	60.49	54.81	74.00	19.19	Peak

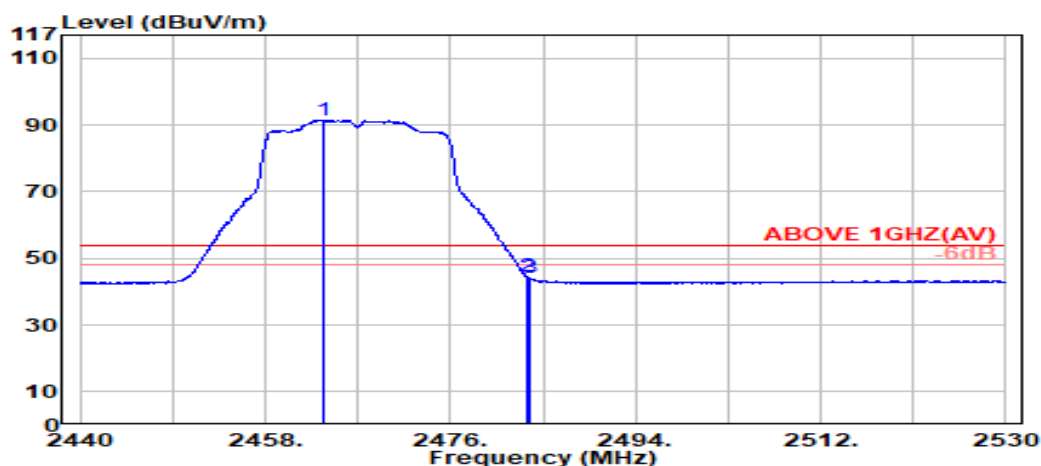

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.750	28.33	5.81	39.87	97.23	91.49	---	---	Average
	2483.500	28.37	5.83	39.87	50.11	44.43	54.00	9.57	Average
	2483.700	28.37	5.83	39.87	49.75	44.08	54.00	9.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

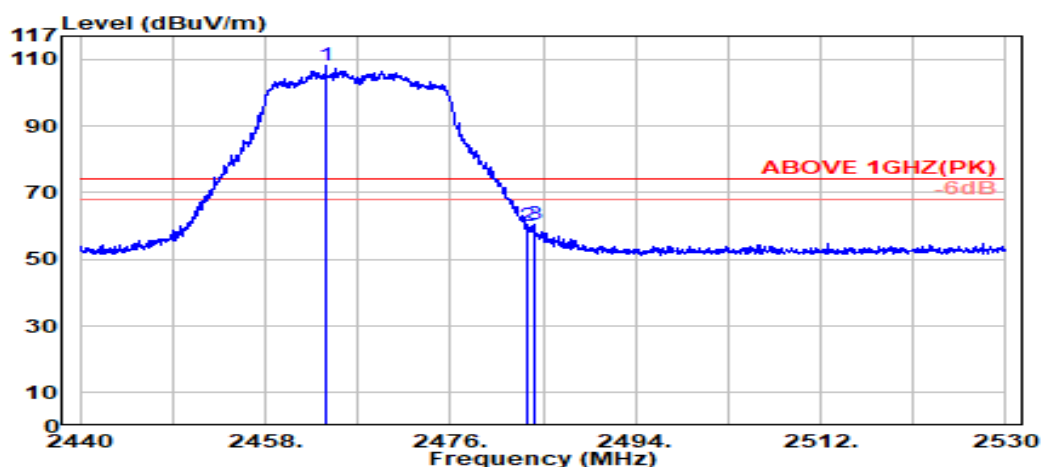

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	28.33	5.81	39.87	113.84	108.11	---	---	Peak
2483.500	28.37	5.83	39.87	65.77	60.09	74.00	13.91	Peak
2484.200	28.37	5.83	39.87	66.35	60.68	74.00	13.32	Peak

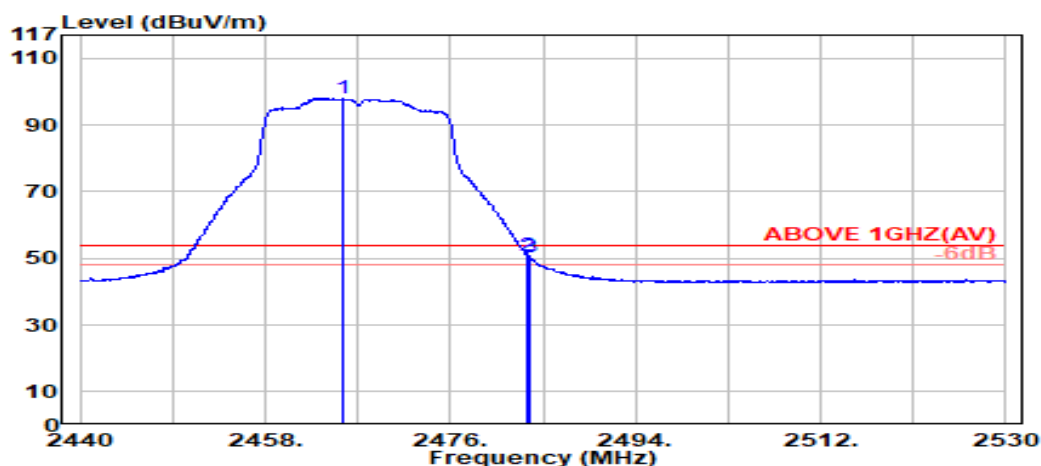

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.450	28.33	5.81	39.87	103.69	97.96	---	---	Average
2483.500	28.37	5.83	39.87	56.40	50.73	54.00	3.27	Average
2483.700	28.37	5.83	39.87	55.97	50.29	54.00	3.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

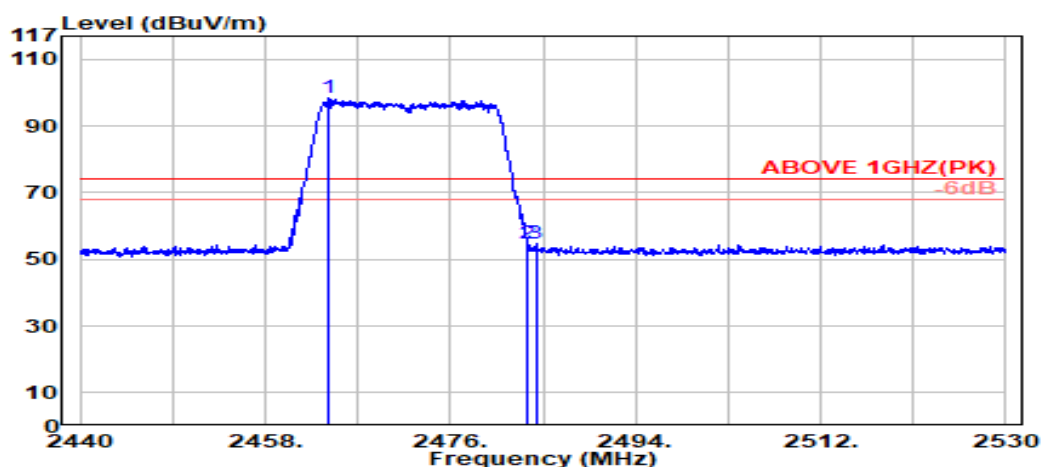

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.250	28.33	5.81	39.87	104.23	98.49	---	---	Peak
	2483.500	28.37	5.83	39.87	60.32	54.64	74.00	19.36	Peak
	2484.300	28.37	5.83	39.87	60.38	54.71	74.00	19.29	Peak

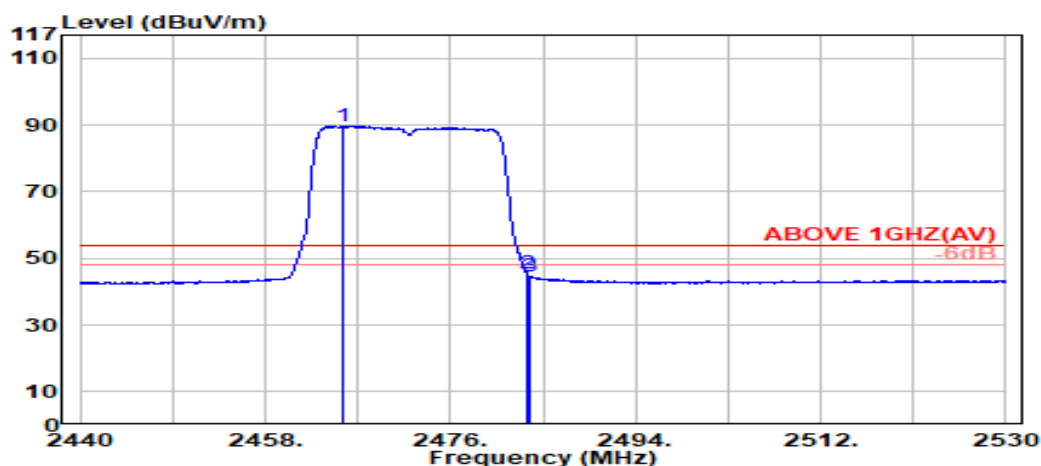

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.550	28.33	5.81	39.87	95.57	89.84	---	---	Average
	2483.500	28.37	5.83	39.87	51.04	45.37	54.00	8.63	Average
	2483.700	28.37	5.83	39.87	50.15	44.48	54.00	9.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

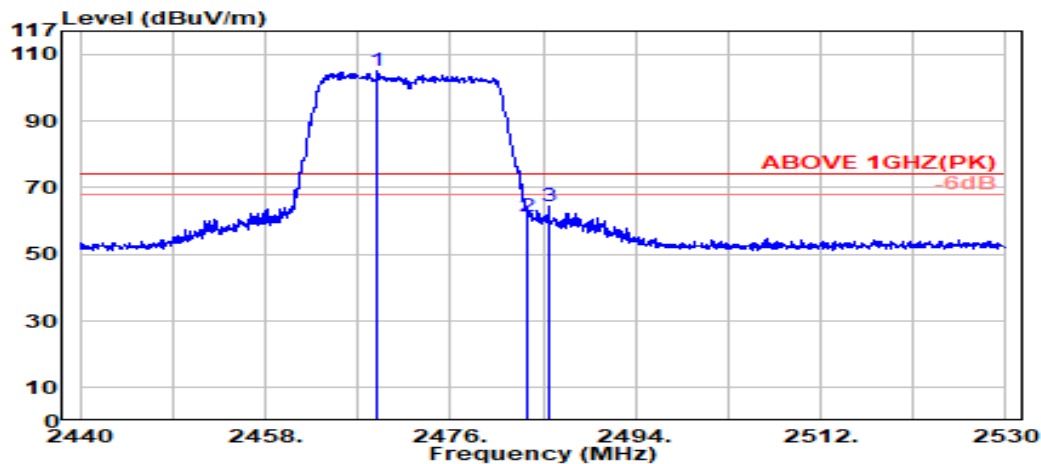

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.950	28.34	5.81	39.87	110.58	104.86	---	---	Peak
2483.500	28.37	5.83	39.87	67.17	61.49	74.00	12.51	Peak
2485.500	28.37	5.83	39.87	70.03	64.36	74.00	9.64	Peak

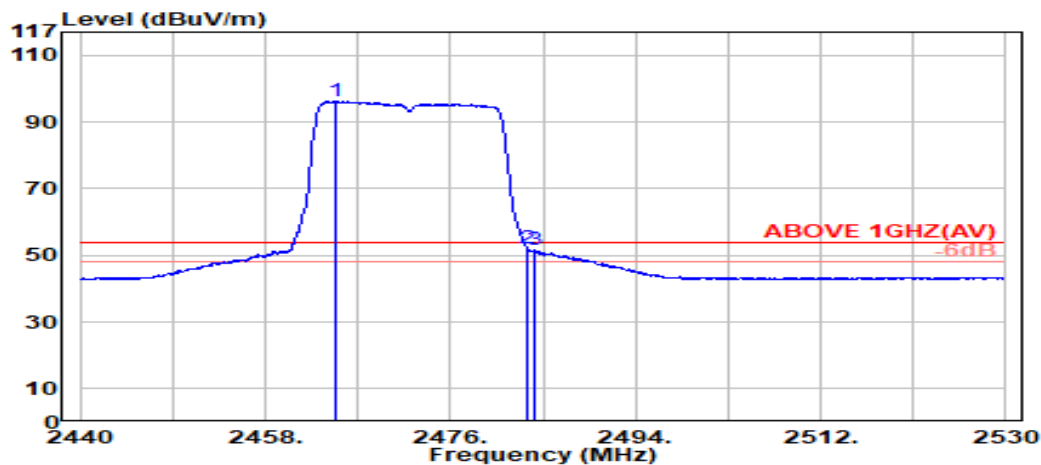

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.950	28.33	5.81	39.87	101.97	96.24	---	---	Average
2483.500	28.37	5.83	39.87	57.73	52.05	54.00	1.95	Average
2484.150	28.37	5.83	39.87	57.14	51.47	54.00	2.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

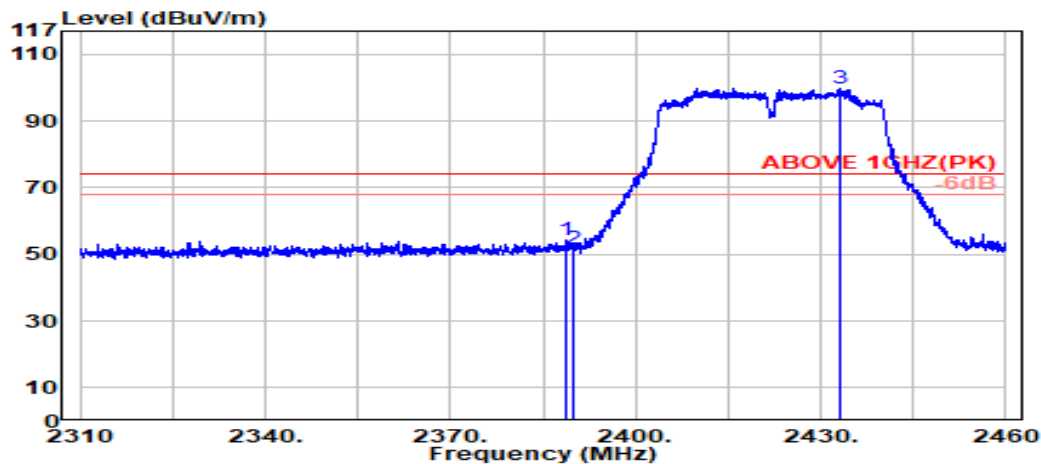

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	60.30	54.28	74.00	19.72	Peak
2390.000	28.14	5.72	39.88	57.75	51.74	74.00	22.26	Peak
@ 2433.300	28.23	5.77	39.87	105.74	99.88	---	---	Peak

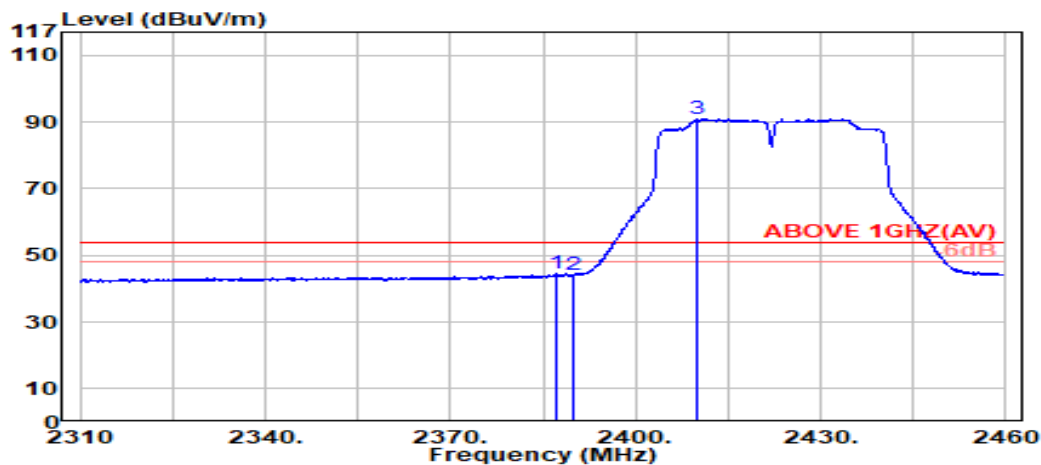

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.350	28.15	5.72	39.88	50.60	44.59	54.00	9.41	Average
2390.000	28.14	5.72	39.88	50.11	44.09	54.00	9.91	Average
@ 2409.900	28.14	5.74	39.88	96.98	90.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

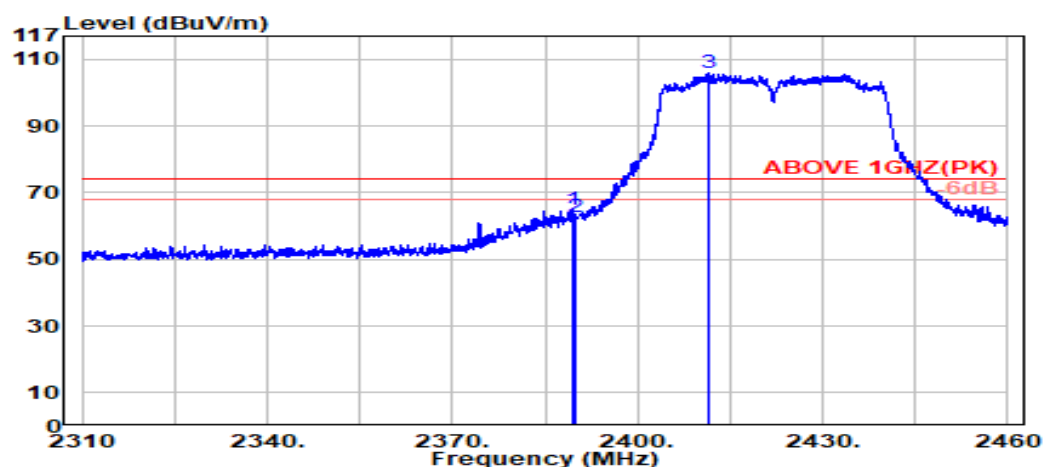

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	71.13	65.11	74.00	8.89	Peak
2390.000	28.14	5.72	39.88	68.53	62.52	74.00	11.48	Peak
@ 2411.500	28.15	5.75	39.88	112.00	106.02	---	---	Peak

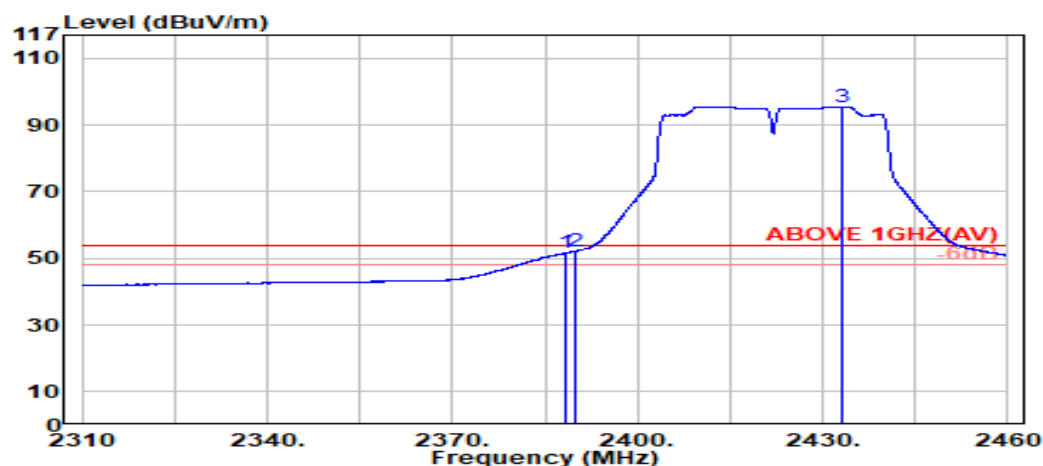

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.15	5.72	39.88	57.67	51.65	54.00	2.35	Average
2390.000	28.14	5.72	39.88	58.21	52.19	54.00	1.81	Average
@ 2433.200	28.23	5.77	39.87	101.43	95.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

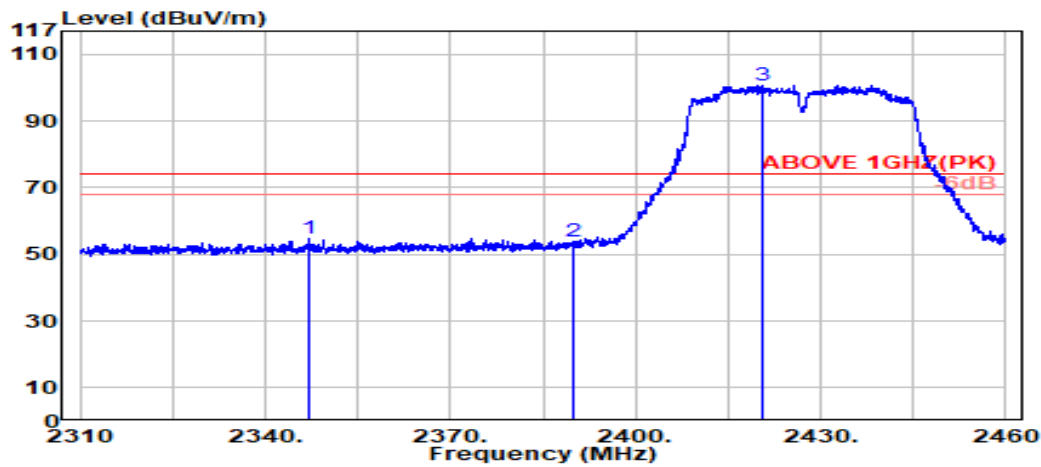

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2347.050	28.28	5.67	39.88	60.87	54.94	74.00	19.06	Peak
2390.000	28.14	5.72	39.88	59.77	53.75	74.00	20.25	Peak
@ 2420.400	28.18	5.76	39.88	106.65	100.72	---	---	Peak

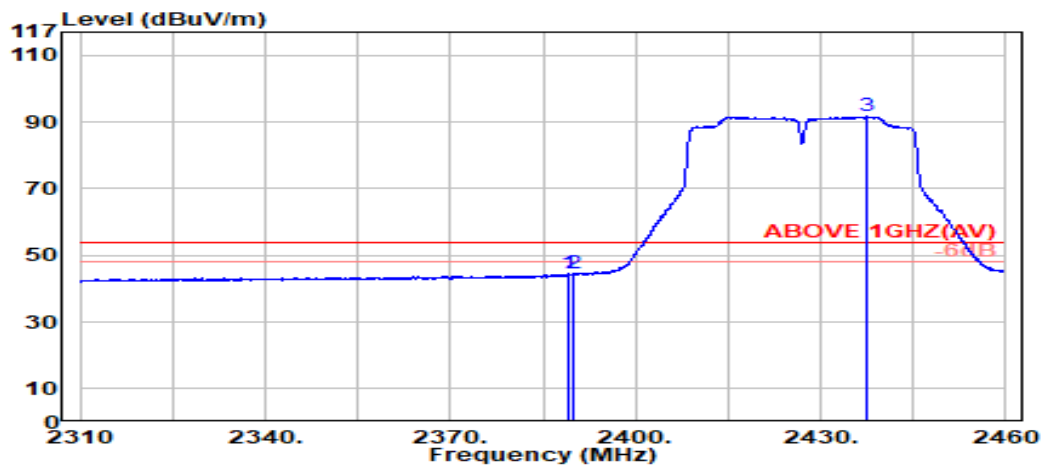


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	50.60	44.58	54.00	9.42	Average
2390.000	28.14	5.72	39.88	50.52	44.50	54.00	9.50	Average
@ 2437.500	28.25	5.78	39.87	97.47	91.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

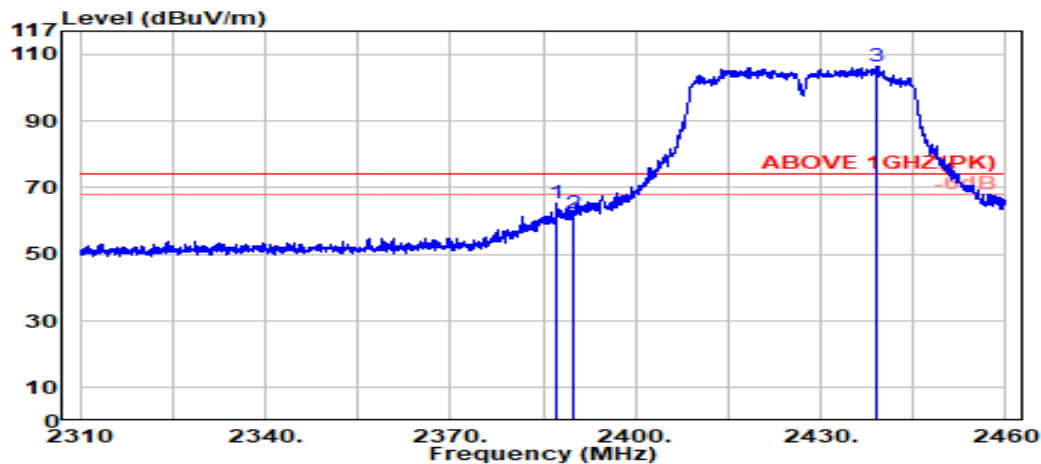

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.300	28.15	5.72	39.88	71.53	65.52	74.00	8.48	Peak
2390.000	28.14	5.72	39.88	68.09	62.07	74.00	11.93	Peak
@ 2439.100	28.26	5.78	39.87	112.05	106.21	---	---	Peak

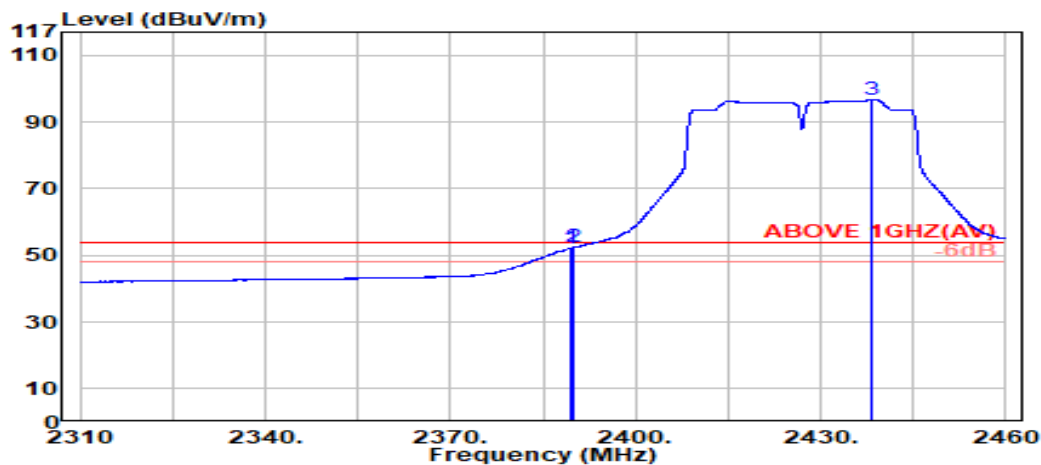

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	58.28	52.26	54.00	1.74	Average
2390.000	28.14	5.72	39.88	58.45	52.43	54.00	1.57	Average
@ 2438.400	28.25	5.78	39.87	102.46	96.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

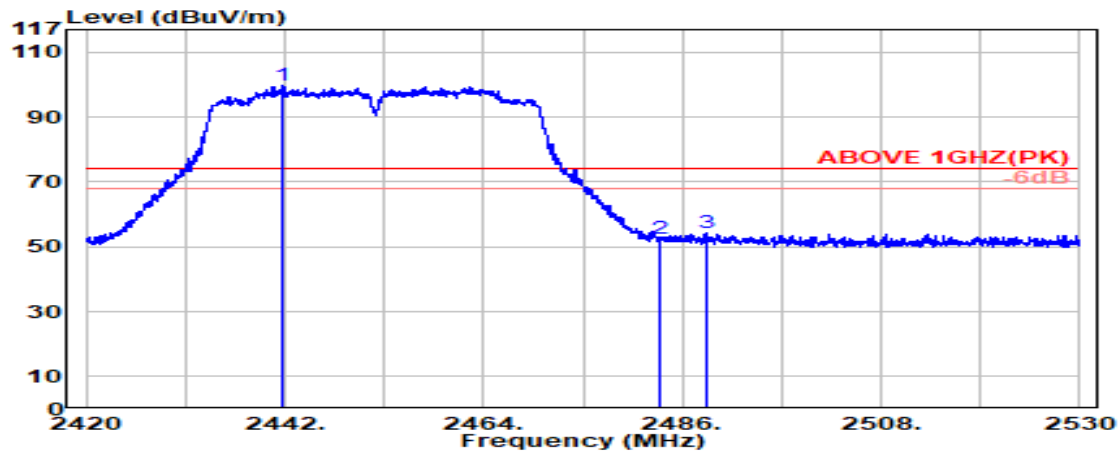

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2441.853	28.27	5.78	39.87	105.41	99.59	---	---	Peak
	2483.500	28.37	5.83	39.87	58.29	52.62	74.00	21.38	Peak
	2488.567	28.38	5.84	39.87	59.92	54.26	74.00	19.74	Peak

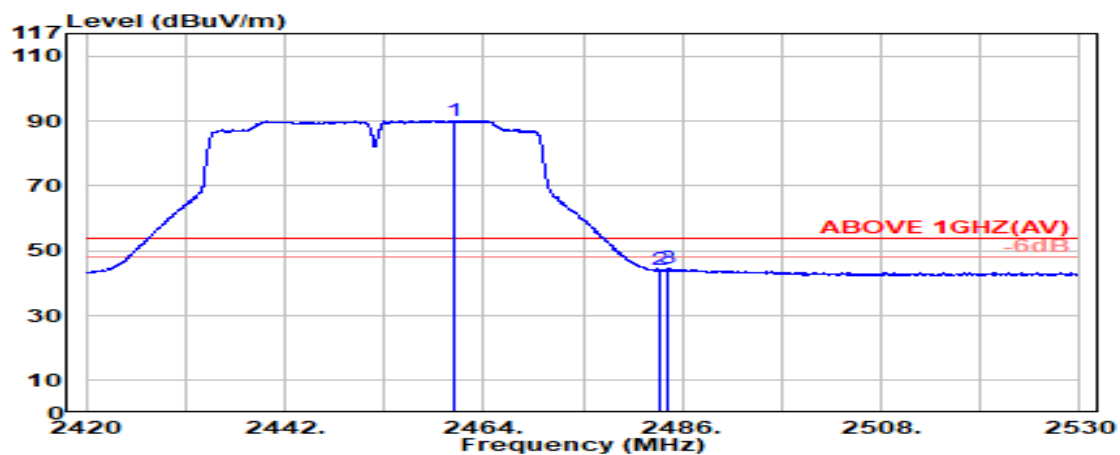

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.773	28.32	5.80	39.87	96.01	90.27	---	---	Average
	2483.500	28.37	5.83	39.87	49.67	43.99	54.00	10.01	Average
	2484.277	28.37	5.83	39.87	50.18	44.51	54.00	9.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

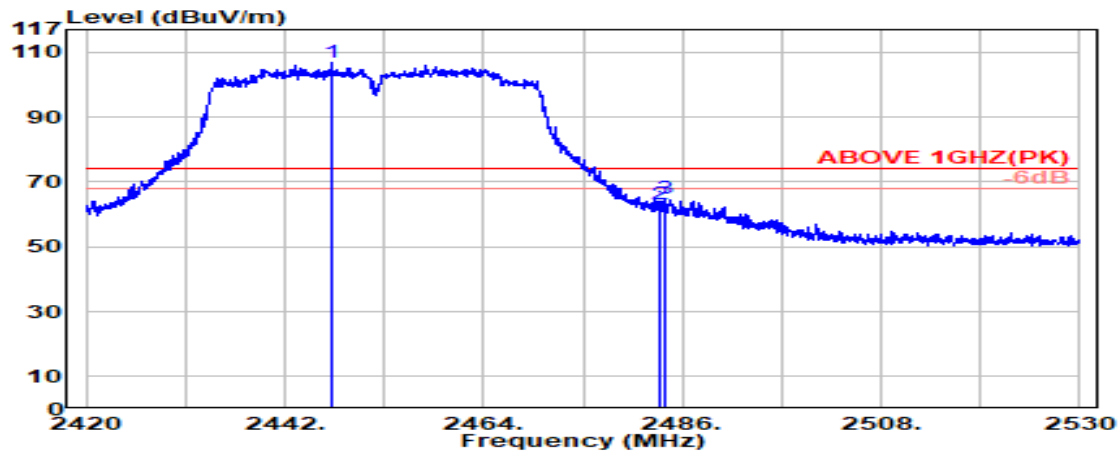

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.170	28.29	5.79	39.87	112.58	106.78	---	---	Peak
2483.500	28.37	5.83	39.87	68.79	63.12	74.00	10.88	Peak
2484.020	28.37	5.83	39.87	70.55	64.88	74.00	9.12	Peak

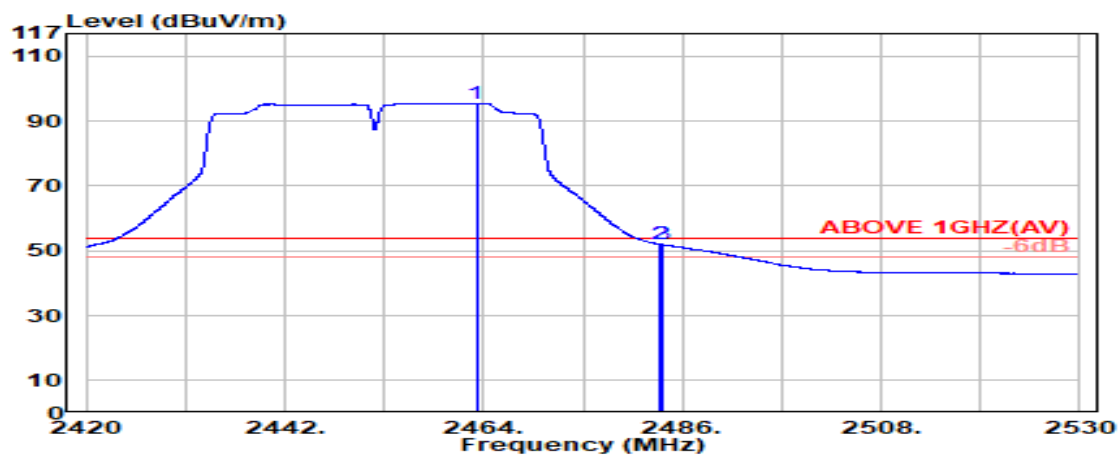

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.193	28.33	5.81	39.87	101.25	95.51	---	---	Average
2483.500	28.37	5.83	39.87	57.66	51.98	54.00	2.02	Average
2483.727	28.37	5.83	39.87	57.57	51.90	54.00	2.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

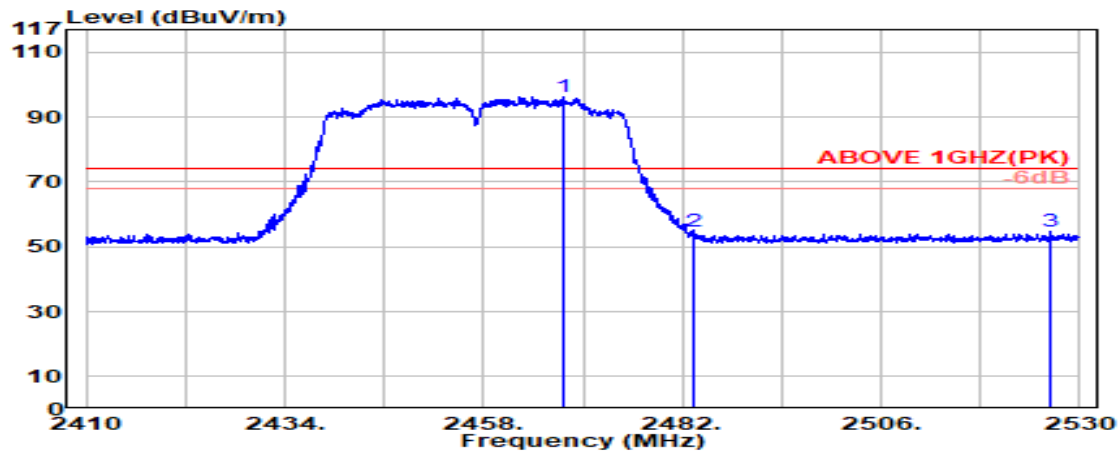

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.34	5.81	39.87	102.13	96.40	---	---	Peak
2483.500	28.37	5.83	39.87	60.36	54.69	74.00	19.31	Peak
2526.550	28.56	5.88	39.88	60.37	54.93	74.00	19.07	Peak

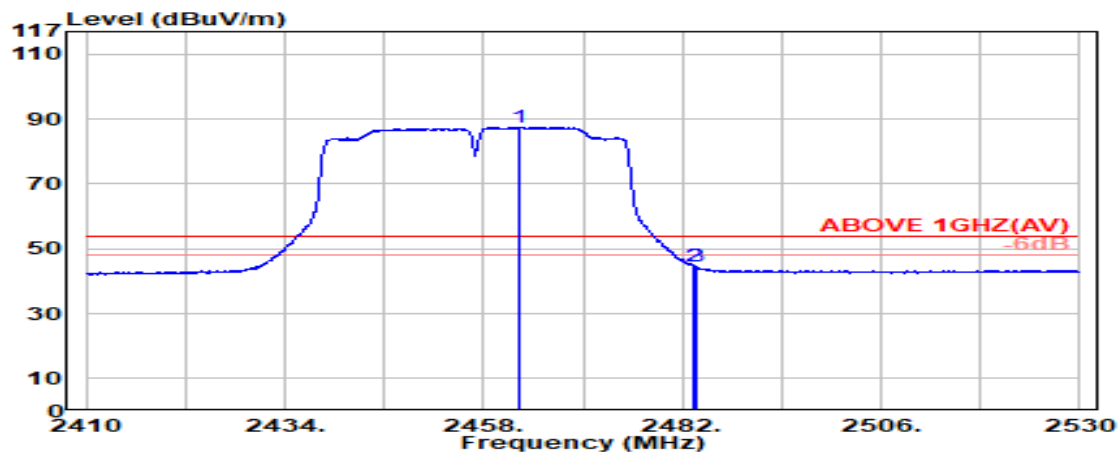

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.450	28.33	5.81	39.87	93.24	87.50	---	---	Average
2483.500	28.37	5.83	39.87	50.38	44.71	54.00	9.29	Average
2483.750	28.37	5.83	39.87	50.27	44.60	54.00	9.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

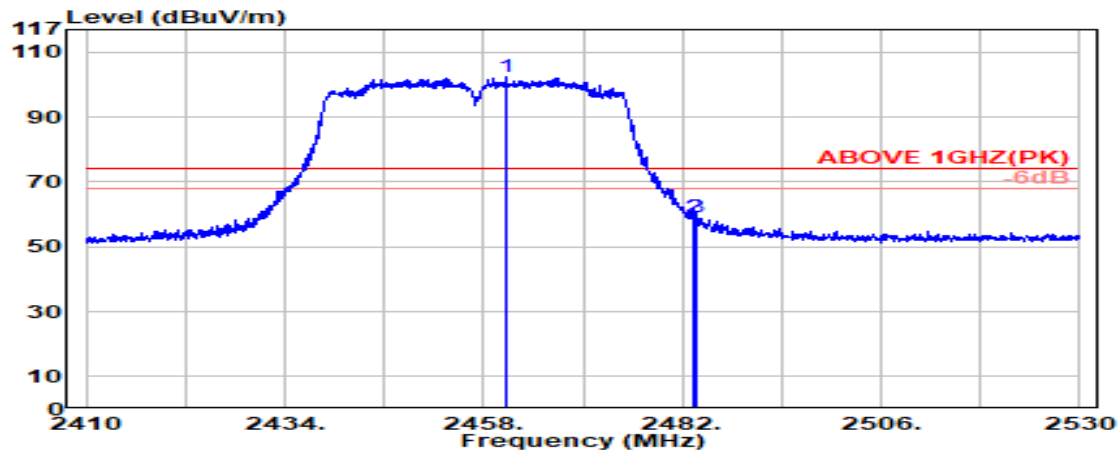

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.750	28.32	5.80	39.87	107.99	102.24	---	---	Peak
2483.500	28.37	5.83	39.87	64.76	59.09	74.00	14.91	Peak
2483.800	28.37	5.83	39.87	65.01	59.34	74.00	14.66	Peak

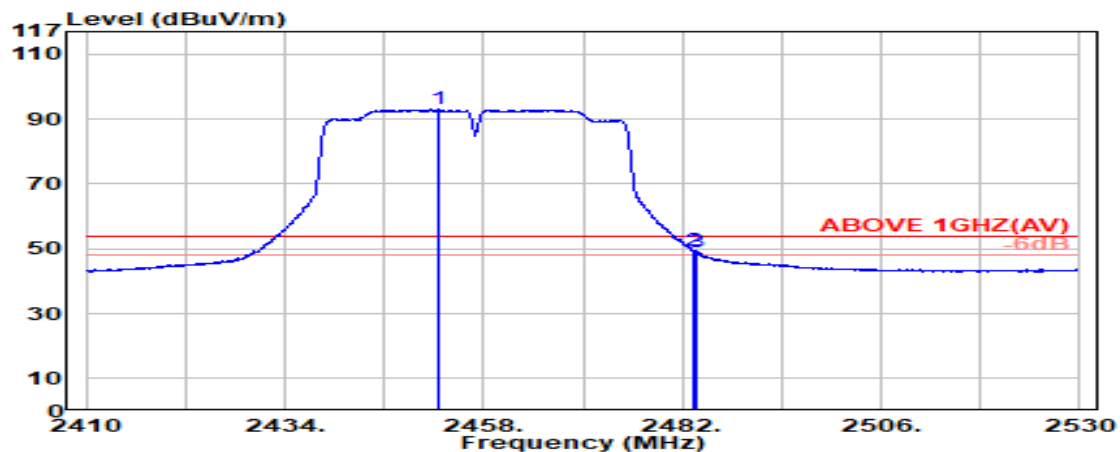

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.450	28.30	5.79	39.87	98.75	92.97	---	---	Average
2483.500	28.37	5.83	39.87	55.02	49.34	54.00	4.66	Average
2483.750	28.37	5.83	39.87	54.79	49.12	54.00	4.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

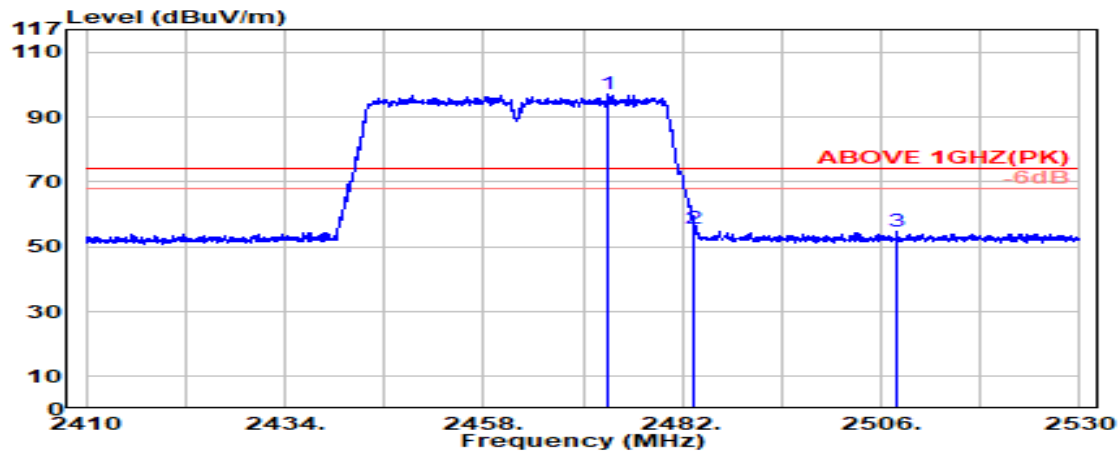

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.050	28.35	5.82	39.87	102.75	97.05	---	---	Peak
	2483.500	28.37	5.83	39.87	61.49	55.82	74.00	18.18	Peak
	2507.900	28.45	5.86	39.87	60.49	54.92	74.00	19.08	Peak

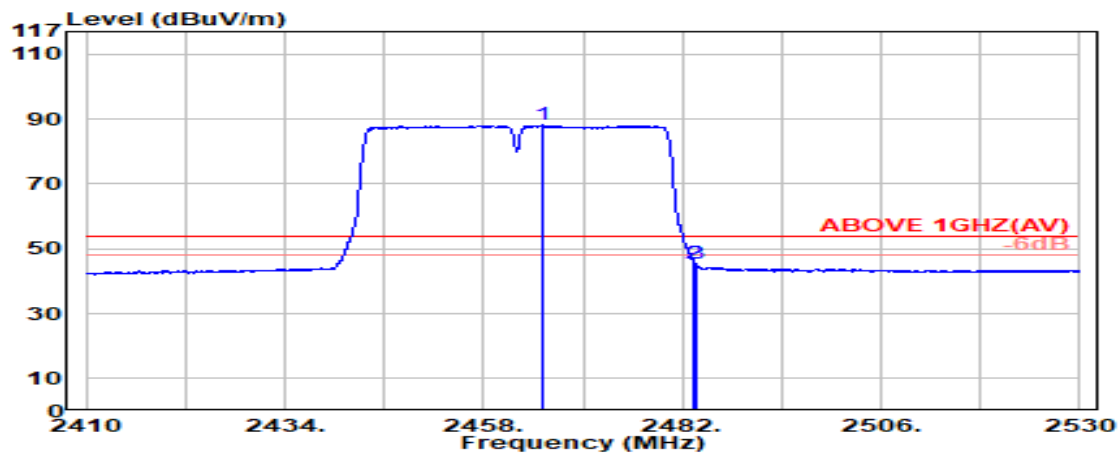

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.050	28.33	5.81	39.87	93.82	88.09	---	---	Average
	2483.500	28.37	5.83	39.87	51.19	45.52	54.00	8.48	Average
	2483.700	28.37	5.83	39.87	50.95	45.28	54.00	8.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

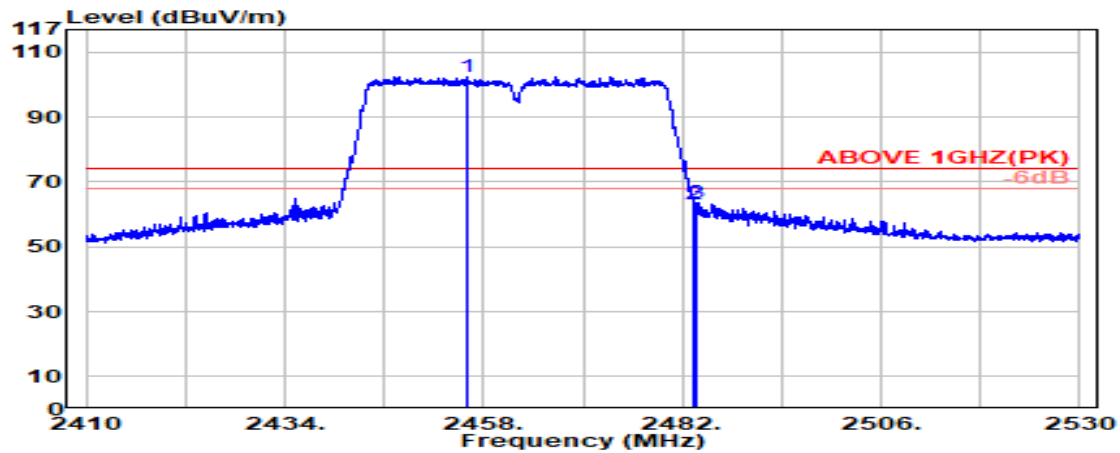

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.950	28.31	5.80	39.87	108.34	102.58	---	---	Peak
	2483.500	28.37	5.83	39.87	68.78	63.11	74.00	10.89	Peak
	2483.800	28.37	5.83	39.87	69.36	63.68	74.00	10.32	Peak

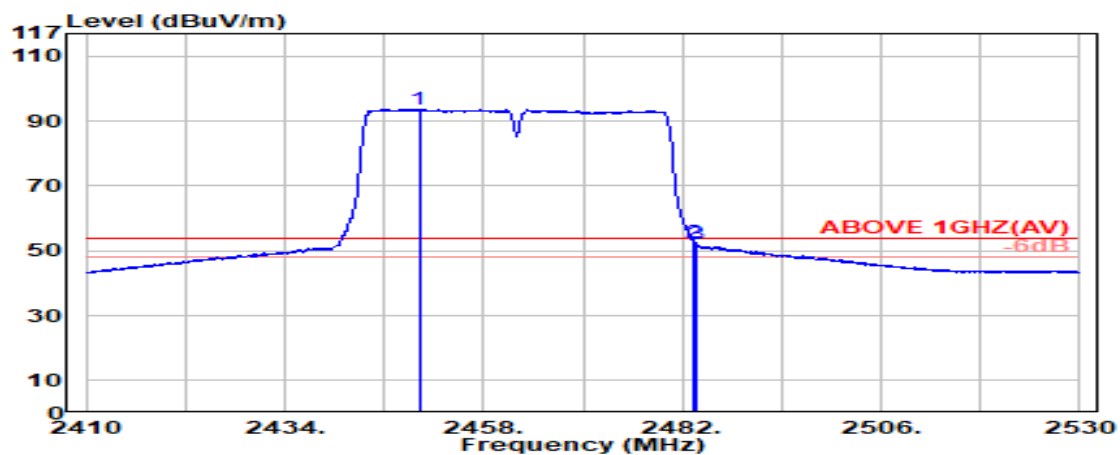

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.200	28.30	5.79	39.87	99.41	93.63	---	---	Average
	2483.500	28.37	5.83	39.87	58.13	52.45	54.00	1.55	Average
	2483.700	28.37	5.83	39.87	57.74	52.07	54.00	1.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

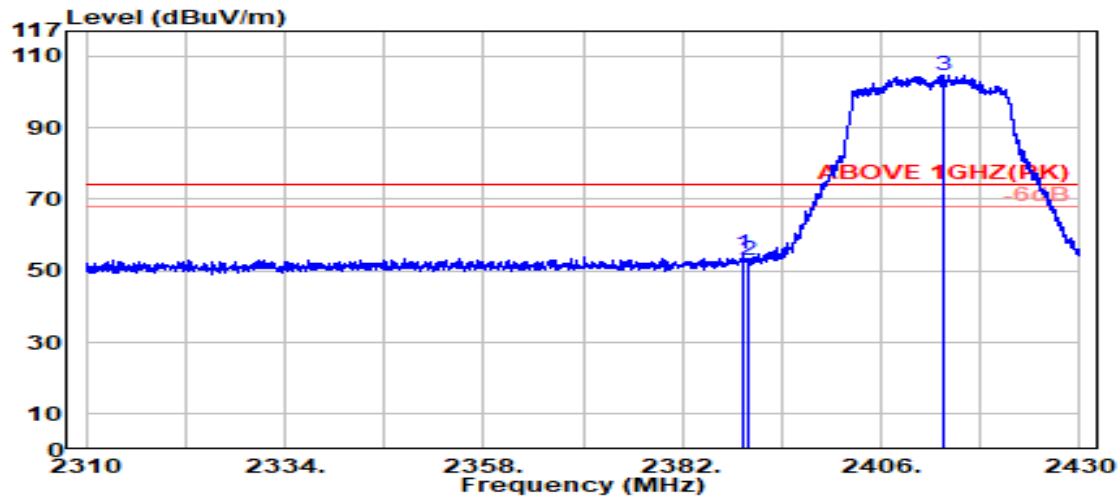

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	60.94	54.93	74.00	19.07	Peak
2390.000	28.14	5.72	39.88	59.10	53.08	74.00	20.92	Peak
@ 2413.550	28.15	5.75	39.88	110.82	104.84	---	---	Peak

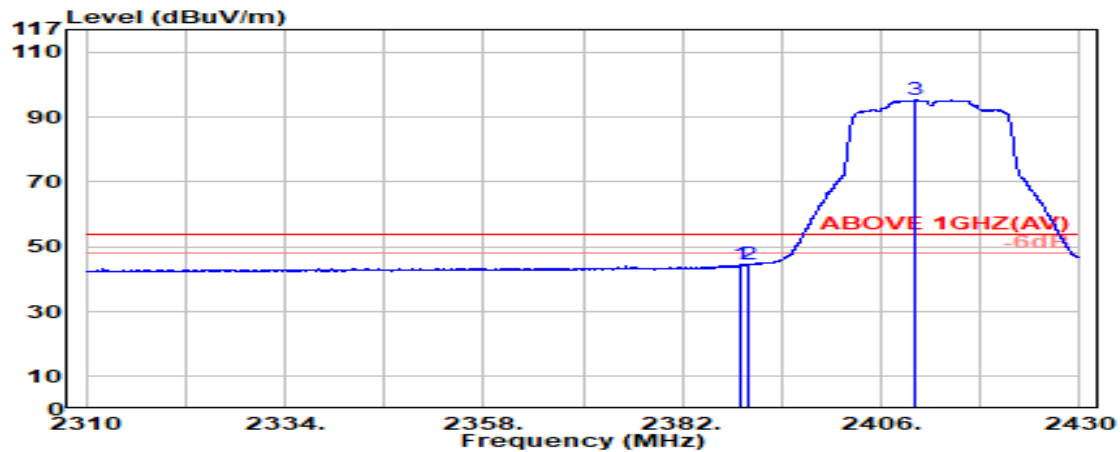

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.14	5.72	39.88	50.64	44.62	54.00	9.38	Average
2390.000	28.14	5.72	39.88	50.63	44.61	54.00	9.39	Average
@ 2410.150	28.14	5.75	39.88	101.29	95.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

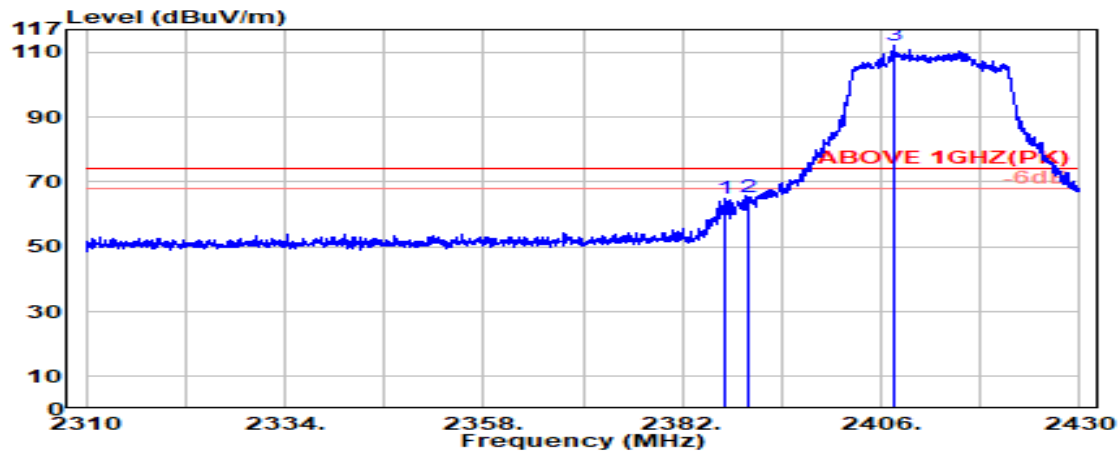

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.150	28.15	5.72	39.88	70.93	64.92	74.00	9.08	Peak
2390.000	28.14	5.72	39.88	71.35	65.34	74.00	8.66	Peak
@ 2407.650	28.13	5.74	39.88	117.93	111.93	---	---	Peak

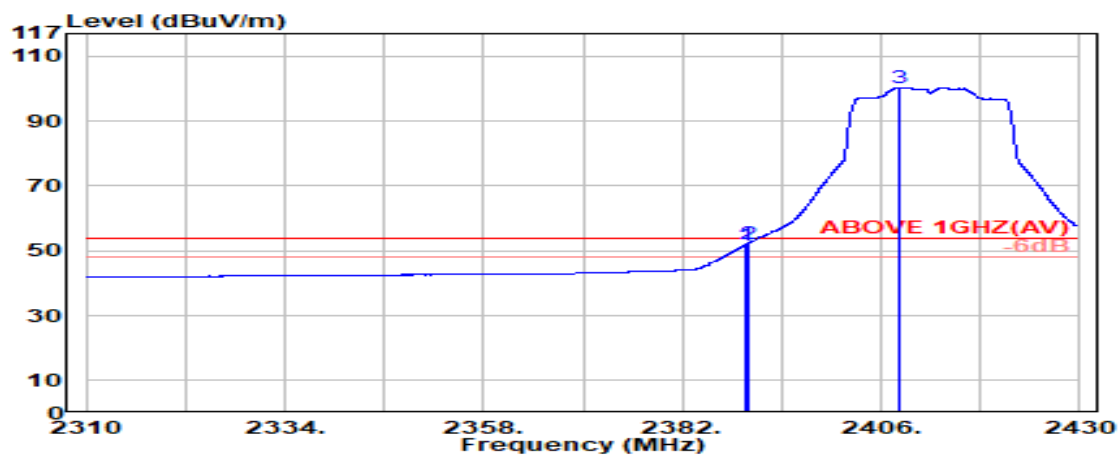

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	57.84	51.82	54.00	2.18	Average
2390.000	28.14	5.72	39.88	58.32	52.31	54.00	1.69	Average
@ 2408.100	28.13	5.74	39.88	106.39	100.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

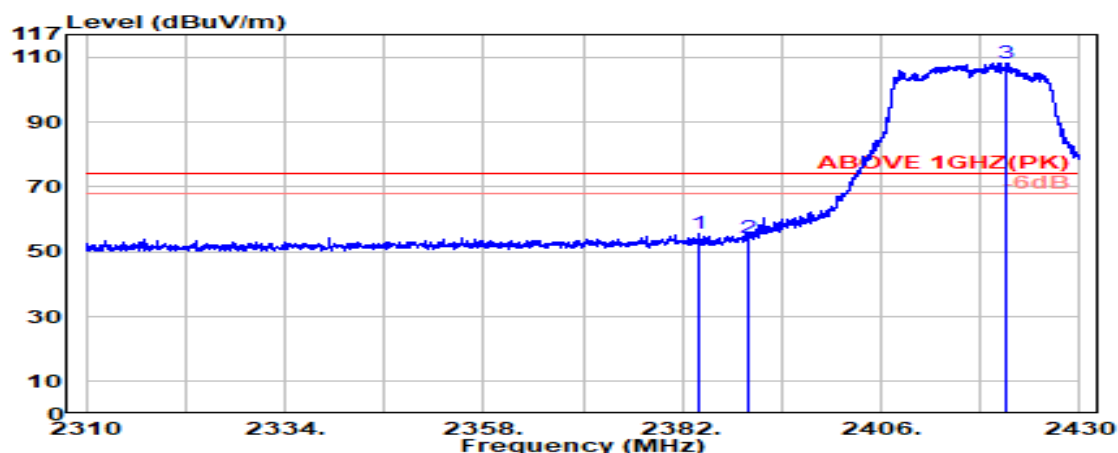

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.050	28.16	5.71	39.88	61.48	55.48	74.00	18.52	Average
2390.000	28.14	5.72	39.88	60.10	54.09	74.00	19.91	Average
@ 2421.200	28.19	5.76	39.88	114.32	108.39	---	---	Average

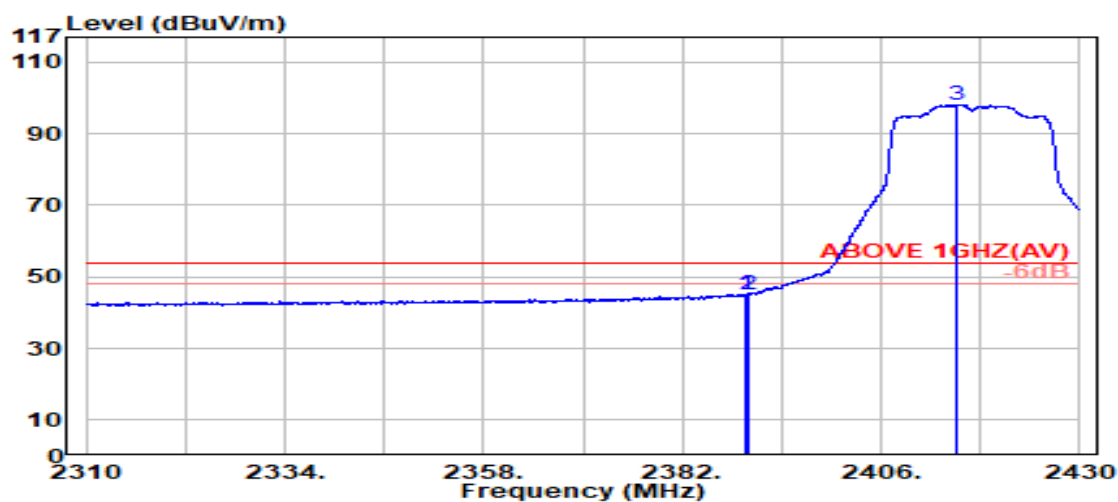

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	51.25	45.24	54.00	8.76	Average
2390.000	28.14	5.72	39.88	51.12	45.10	54.00	8.90	Average
@ 2415.100	28.16	5.75	39.88	104.10	98.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

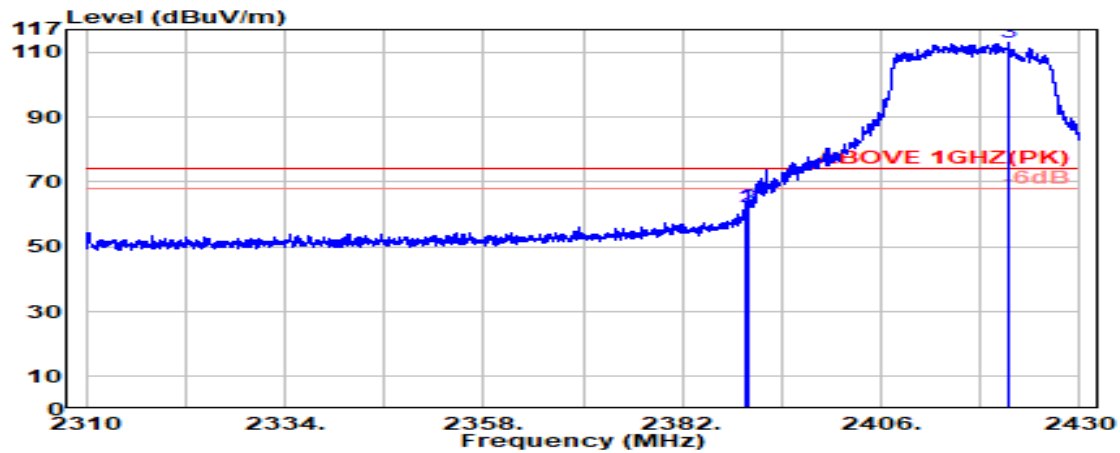

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	68.11	62.09	74.00	11.91	Peak
2390.000	28.14	5.72	39.88	68.39	62.37	74.00	11.63	Peak
@ 2421.450	28.19	5.76	39.88	119.17	113.24	---	---	Peak

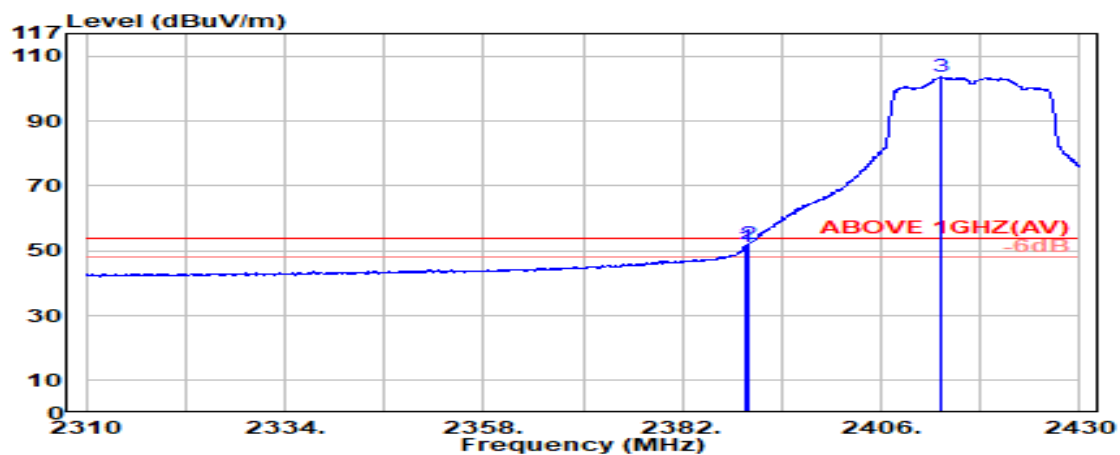

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	57.34	51.33	54.00	2.67	Average
2390.000	28.14	5.72	39.88	58.22	52.20	54.00	1.80	Average
@ 2413.300	28.15	5.75	39.88	109.61	103.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

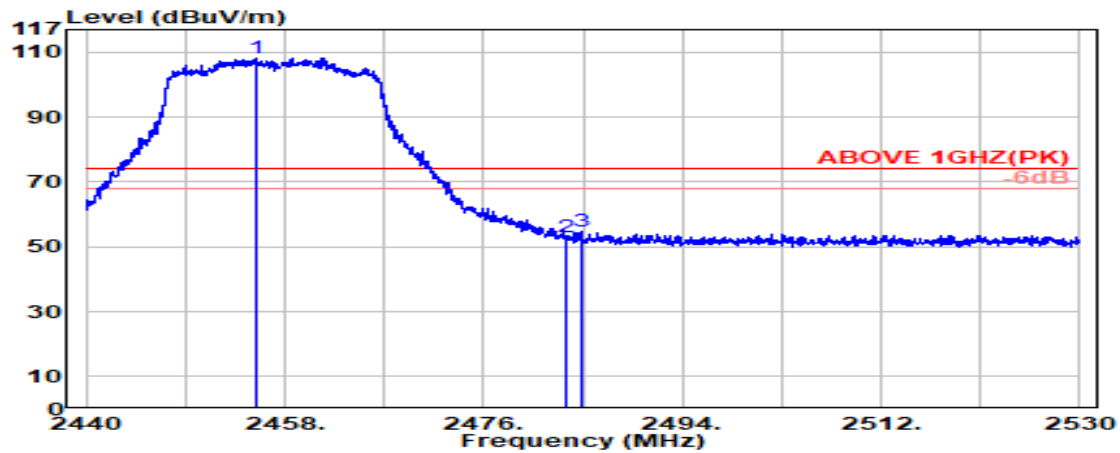

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.413	28.31	5.80	39.87	113.91	108.15	---	---	Peak
	2483.500	28.37	5.83	39.87	58.84	53.17	74.00	20.83	Peak
	2484.775	28.37	5.83	39.87	60.40	54.73	74.00	19.27	Peak

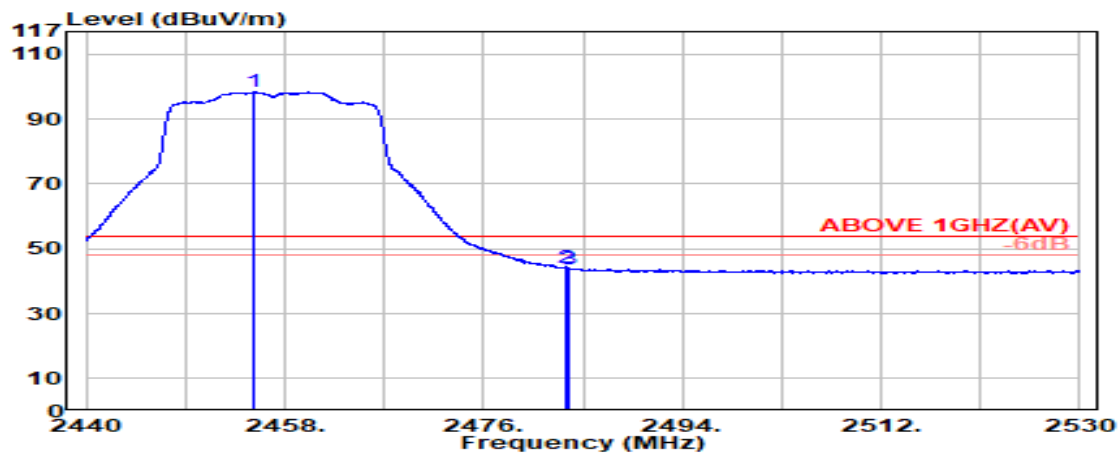

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.225	28.31	5.80	39.87	104.09	98.32	---	---	Average
	2483.500	28.37	5.83	39.87	49.70	44.03	54.00	9.97	Average
	2483.762	28.37	5.83	39.87	49.58	43.90	54.00	10.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

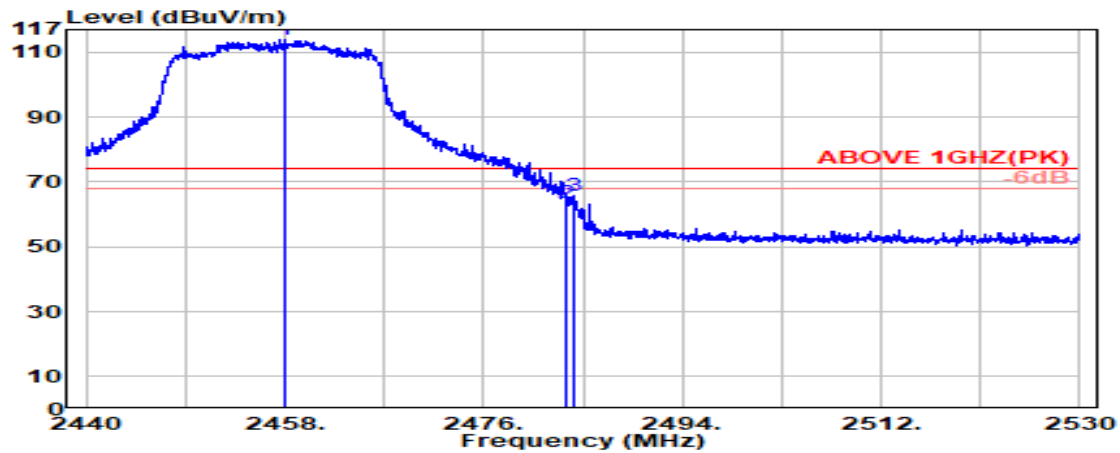

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.038	28.32	5.80	39.87	119.73	113.97	---	---	Peak
	2483.500	28.37	5.83	39.87	69.37	63.69	74.00	10.31	Peak
	2484.175	28.37	5.83	39.87	71.24	65.57	74.00	8.43	Peak

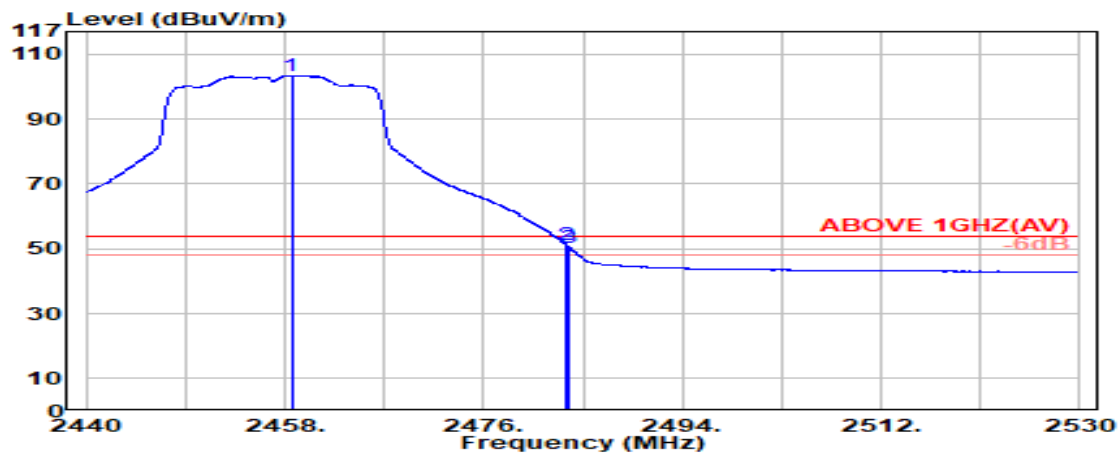

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.600	28.32	5.80	39.87	109.28	103.53	---	---	Average
	2483.500	28.37	5.83	39.87	56.80	51.13	54.00	2.87	Average
	2483.725	28.37	5.83	39.87	56.14	50.46	54.00	3.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

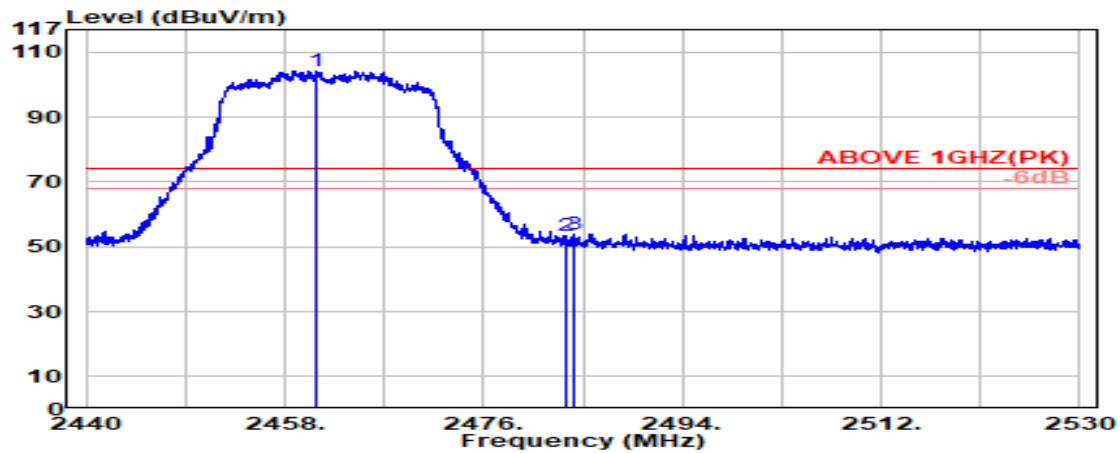

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.850	28.32	5.80	39.87	110.01	104.26	---	---	Peak
2483.500	28.37	5.83	39.87	59.28	53.61	74.00	20.39	Peak
2484.137	28.37	5.83	39.87	59.64	53.97	74.00	20.03	Peak

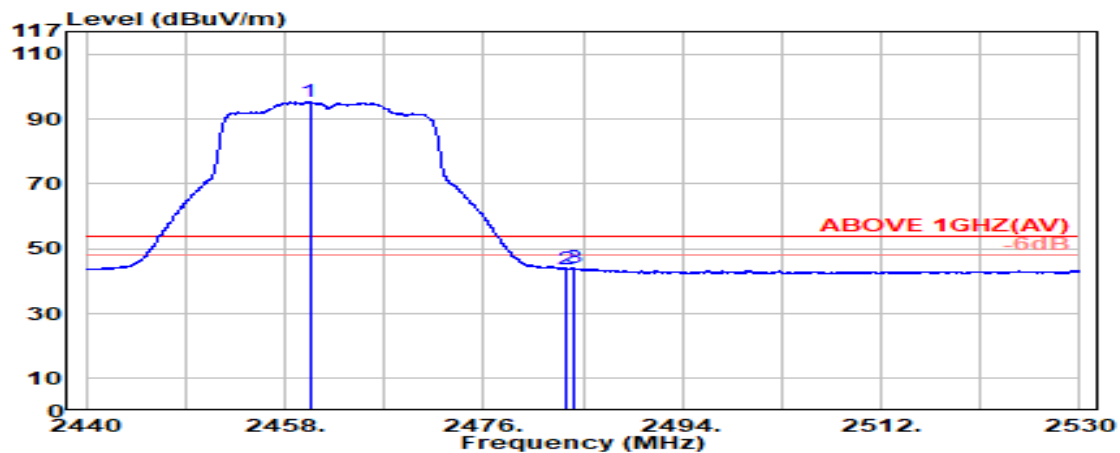

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.250	28.32	5.80	39.87	101.15	95.41	---	---	Average
2483.500	28.37	5.83	39.87	49.45	43.78	54.00	10.22	Average
2484.100	28.37	5.83	39.87	49.75	44.08	54.00	9.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

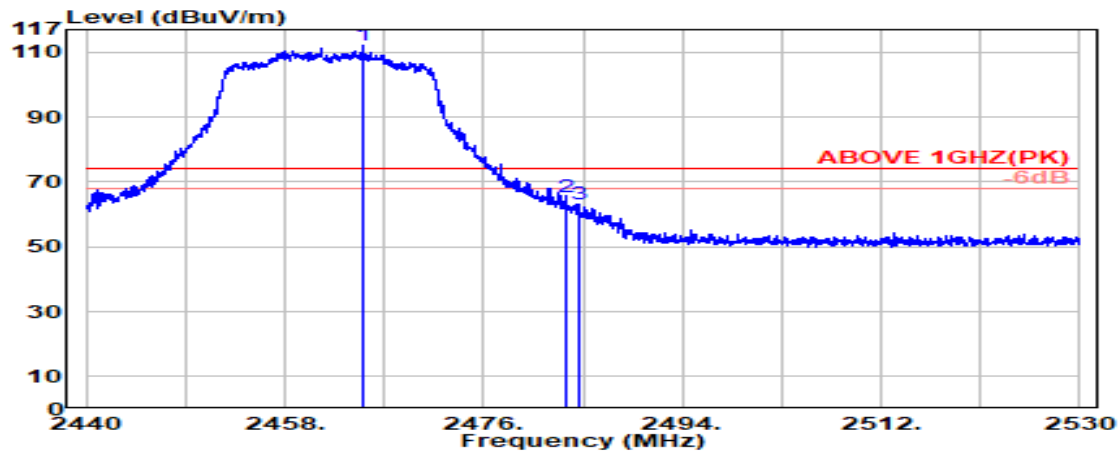

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.087	28.33	5.81	39.87	117.90	112.16	---	---	Peak
	2483.500	28.37	5.83	39.87	70.93	65.26	74.00	8.74	Peak
	2484.625	28.37	5.83	39.87	68.93	63.26	74.00	10.74	Peak

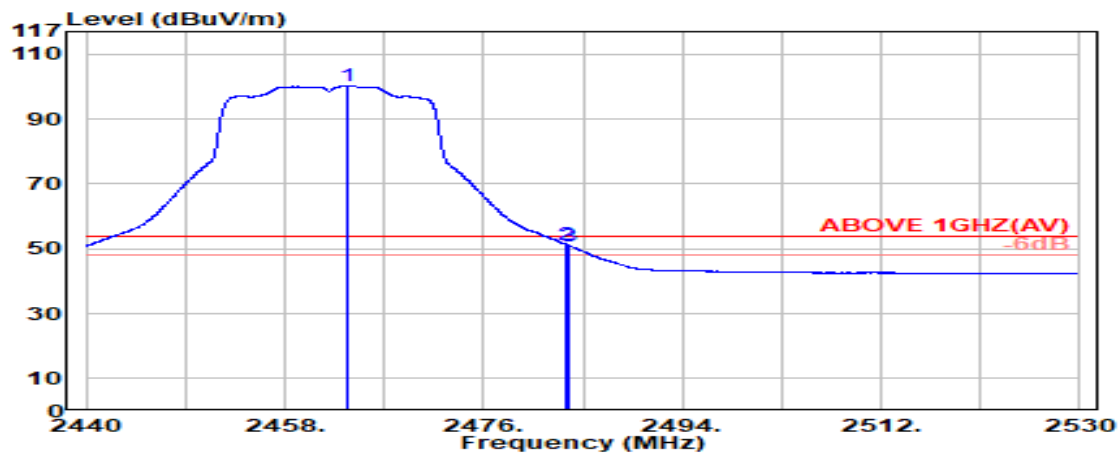

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.625	28.33	5.81	39.87	106.04	100.30	---	---	Average
	2483.500	28.37	5.83	39.87	56.95	51.28	54.00	2.72	Average
	2483.725	28.37	5.83	39.87	56.66	50.99	54.00	3.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

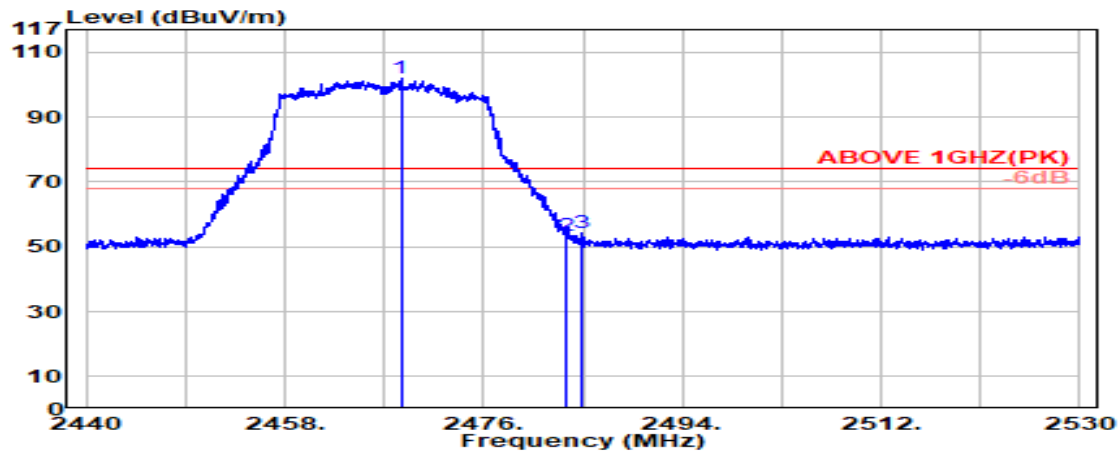

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.500	28.34	5.81	39.87	107.55	101.83	---	---	Peak
	2483.500	28.37	5.83	39.87	59.07	53.40	74.00	20.60	Peak
	2484.887	28.37	5.83	39.87	59.93	54.26	74.00	19.74	Peak

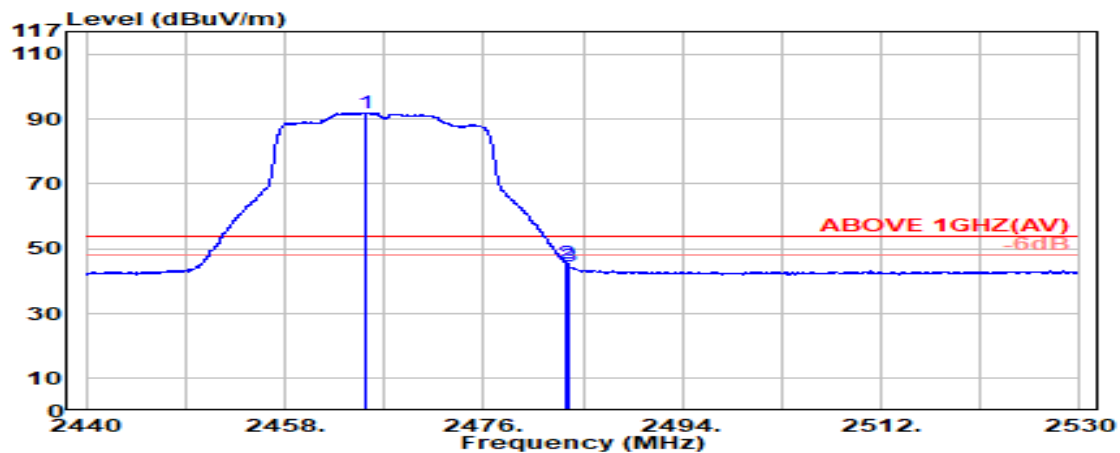

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.425	28.33	5.81	39.87	97.76	92.03	---	---	Average
	2483.500	28.37	5.83	39.87	51.21	45.54	54.00	8.46	Average
	2483.725	28.37	5.83	39.87	50.33	44.65	54.00	9.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

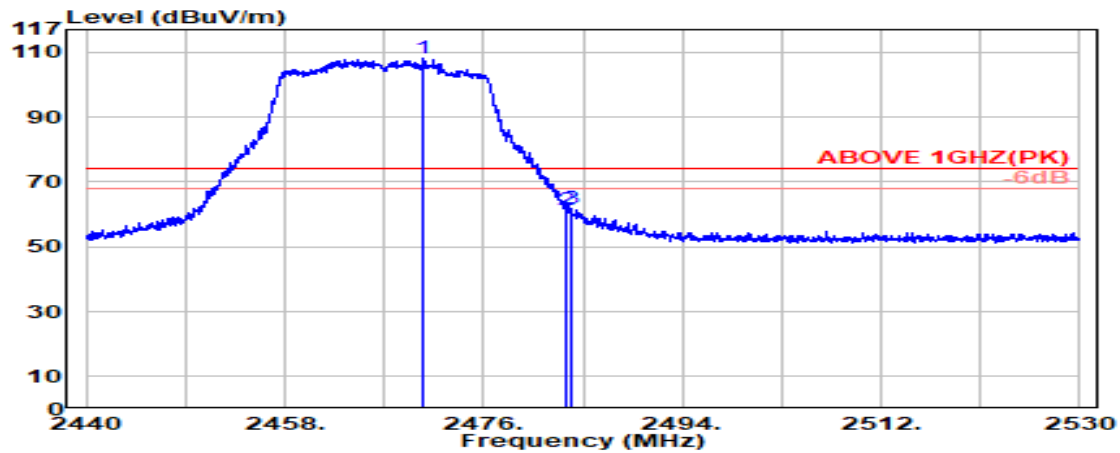

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.563	28.34	5.82	39.87	113.81	108.10	---	---	Peak
	2483.500	28.37	5.83	39.87	67.10	61.43	74.00	12.57	Peak
	2483.875	28.37	5.83	39.87	67.53	61.85	74.00	12.15	Peak

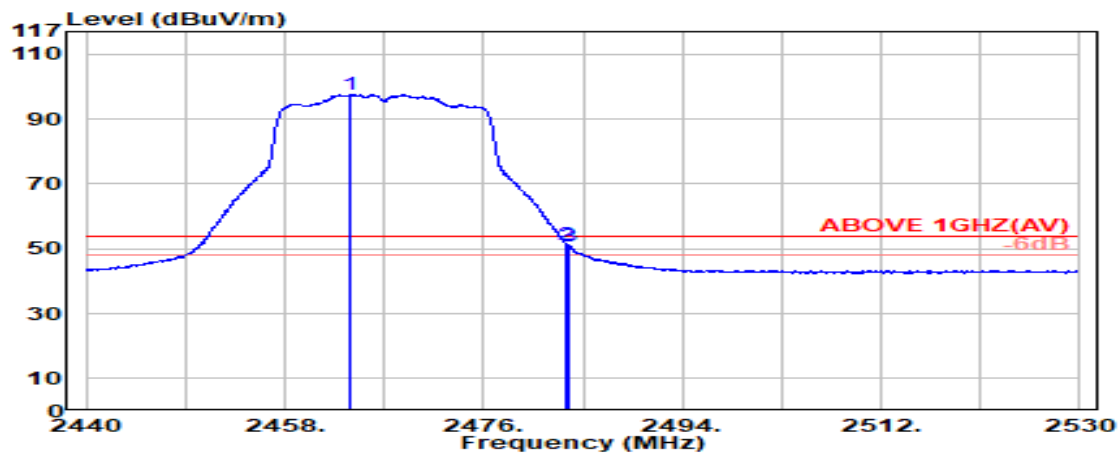

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.925	28.33	5.81	39.87	103.41	97.67	---	---	Average
	2483.500	28.37	5.83	39.87	56.95	51.28	54.00	2.72	Average
	2483.725	28.37	5.83	39.87	56.45	50.78	54.00	3.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------



Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2477.650	28.36	5.82	39.87	105.99	100.30	---	---	Peak
	2483.500	28.37	5.83	39.87	63.72	58.04	74.00	15.96	Peak
	2484.587	28.37	5.83	39.87	61.44	55.77	74.00	18.23	Peak

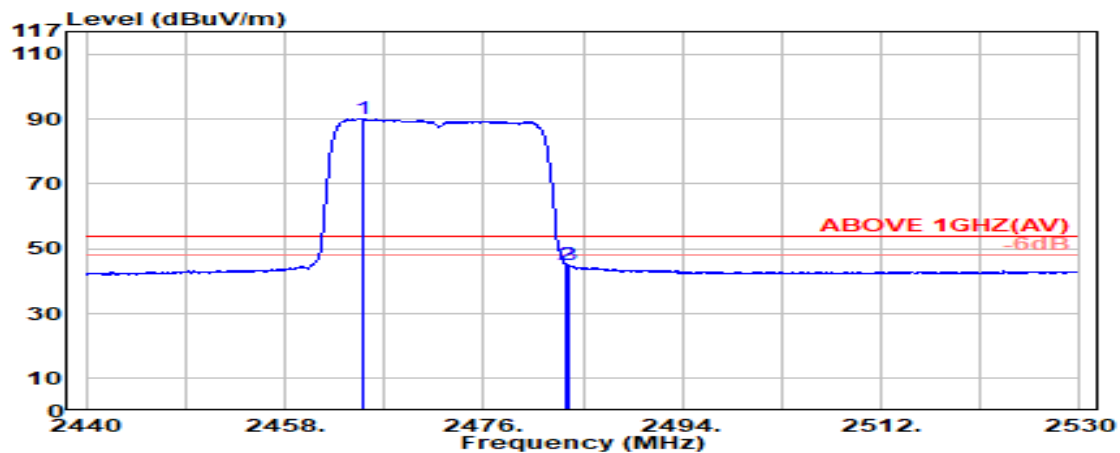

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.975	28.33	5.81	39.87	95.87	90.14	---	---	Average
	2483.500	28.37	5.83	39.87	50.75	45.08	54.00	8.92	Average
	2483.725	28.37	5.83	39.87	50.57	44.89	54.00	9.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

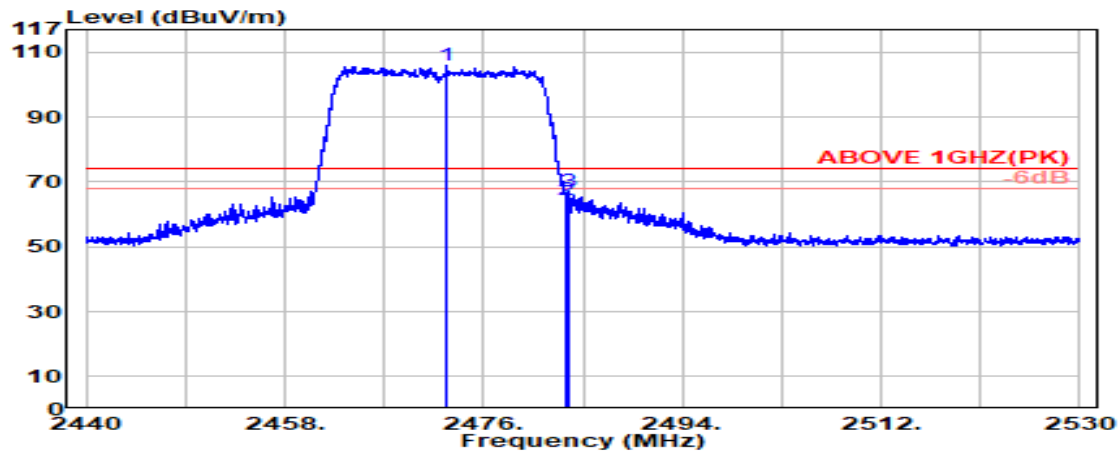

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.663	28.35	5.82	39.87	111.73	106.03	---	---	Peak
	2483.500	28.37	5.83	39.87	70.02	64.34	74.00	9.66	Peak
	2483.725	28.37	5.83	39.87	72.62	66.95	74.00	7.05	Peak

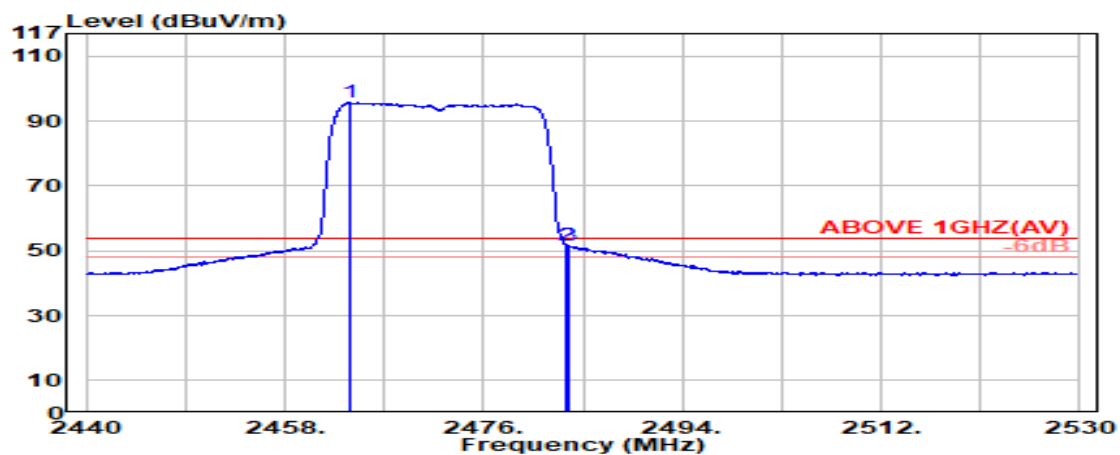

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.813	28.33	5.81	39.87	101.52	95.78	---	---	Average
	2483.500	28.37	5.83	39.87	57.51	51.84	54.00	2.16	Average
	2483.725	28.37	5.83	39.87	57.28	51.61	54.00	2.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

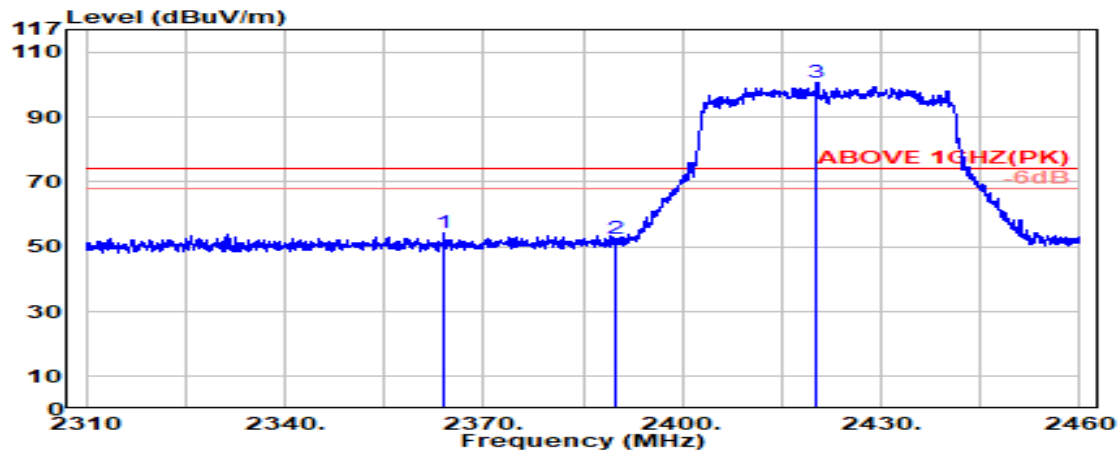

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2364.000	28.24	5.69	39.88	60.17	54.22	74.00	19.78	Peak
2390.000	28.14	5.72	39.88	58.42	52.41	74.00	21.59	Peak
@ 2420.313	28.18	5.76	39.88	106.72	100.78	---	---	Peak

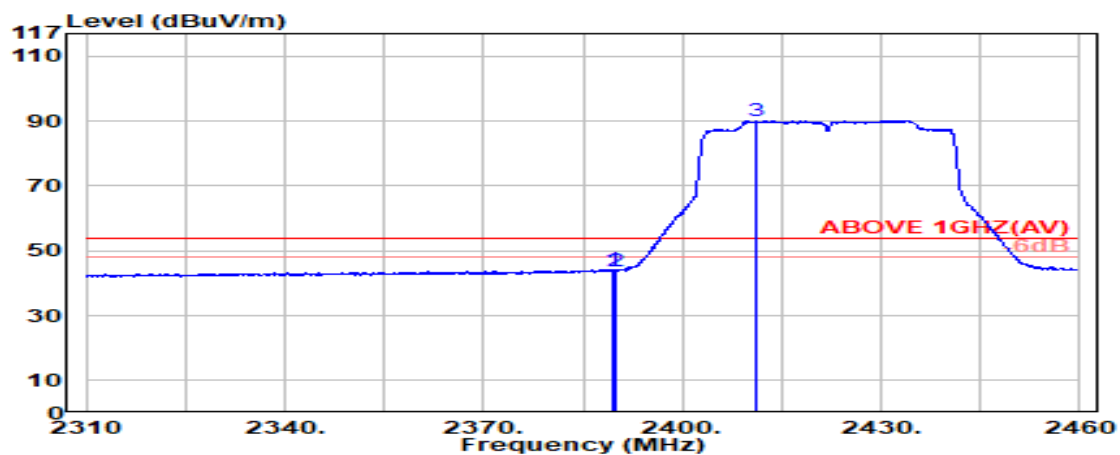

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.625	28.14	5.72	39.88	50.39	44.37	54.00	9.63	Average
2390.000	28.14	5.72	39.88	49.92	43.90	54.00	10.10	Average
@ 2411.000	28.14	5.75	39.88	96.22	90.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

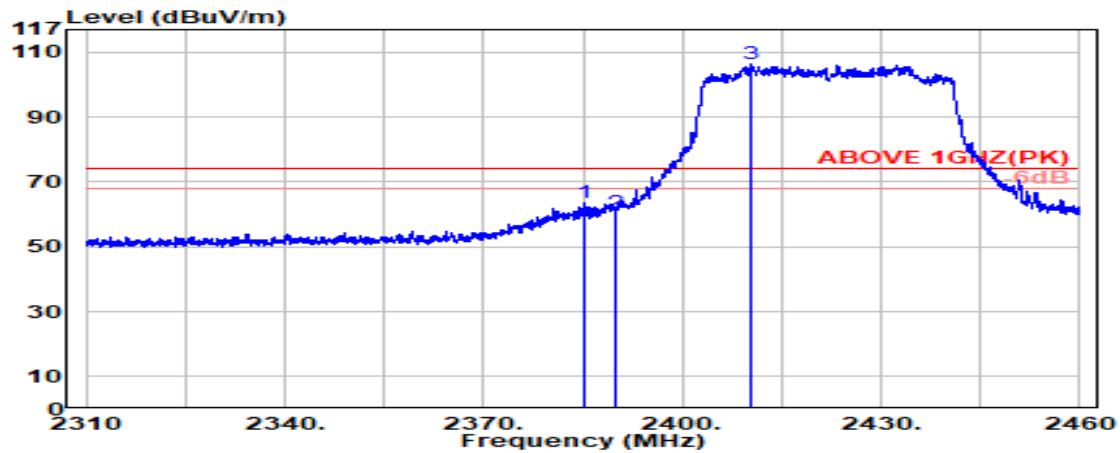

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.188	28.16	5.72	39.88	69.36	63.36	74.00	10.64	Peak
2390.000	28.14	5.72	39.88	66.68	60.67	74.00	13.33	Peak
@ 2410.313	28.14	5.75	39.88	112.52	106.53	---	---	Peak

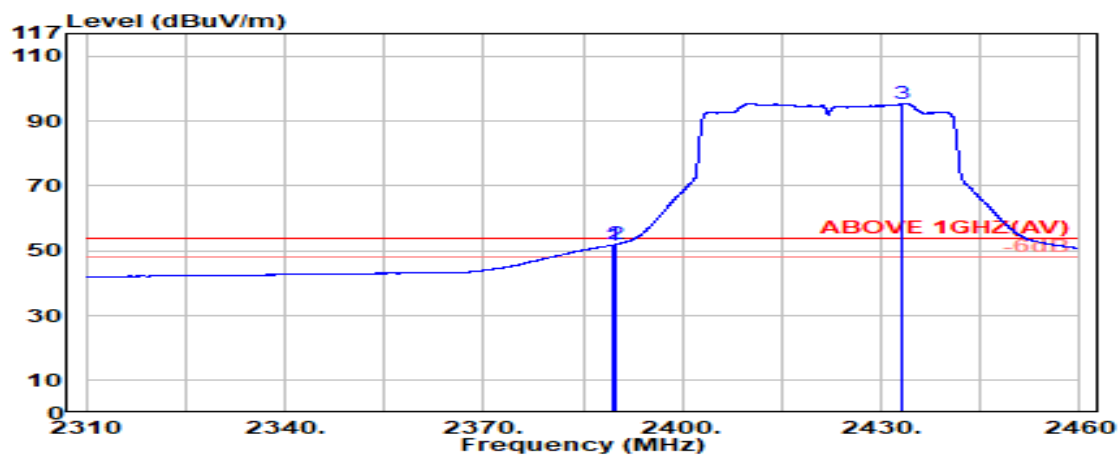

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	28.14	5.72	39.88	57.82	51.81	54.00	2.19	Average
2390.000	28.14	5.72	39.88	57.99	51.97	54.00	2.03	Average
@ 2433.250	28.23	5.77	39.87	101.22	95.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

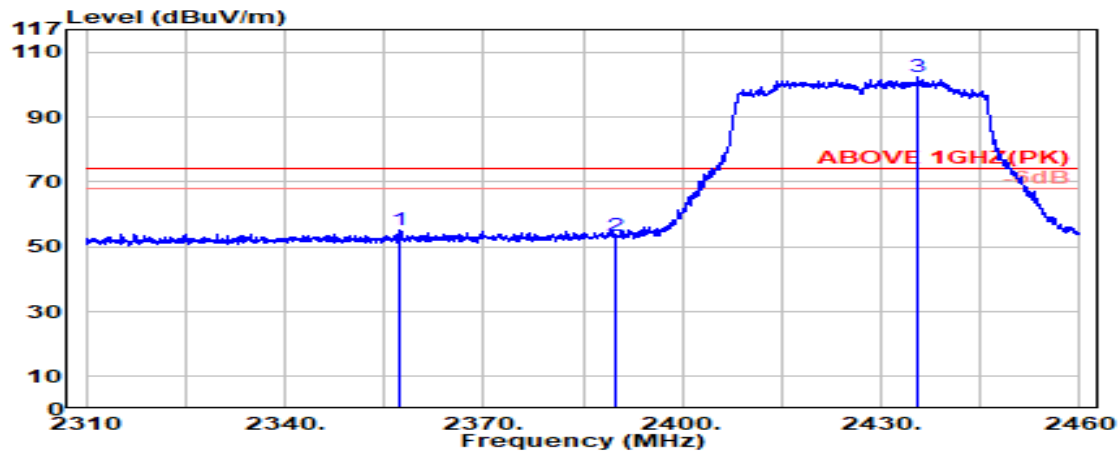

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2357.438	28.27	5.68	39.88	60.96	55.03	74.00	18.97	Peak
2390.000	28.14	5.72	39.88	59.56	53.54	74.00	20.46	Peak
@ 2435.438	28.24	5.77	39.87	108.49	102.63	---	---	Peak

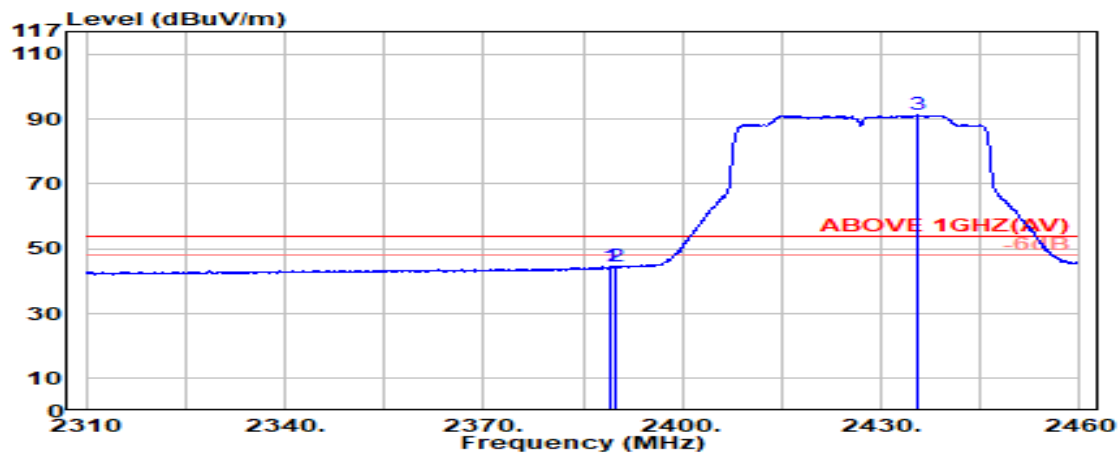

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	50.53	44.51	54.00	9.49	Average
2390.000	28.14	5.72	39.88	50.58	44.57	54.00	9.43	Average
@ 2435.438	28.24	5.77	39.87	97.04	91.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

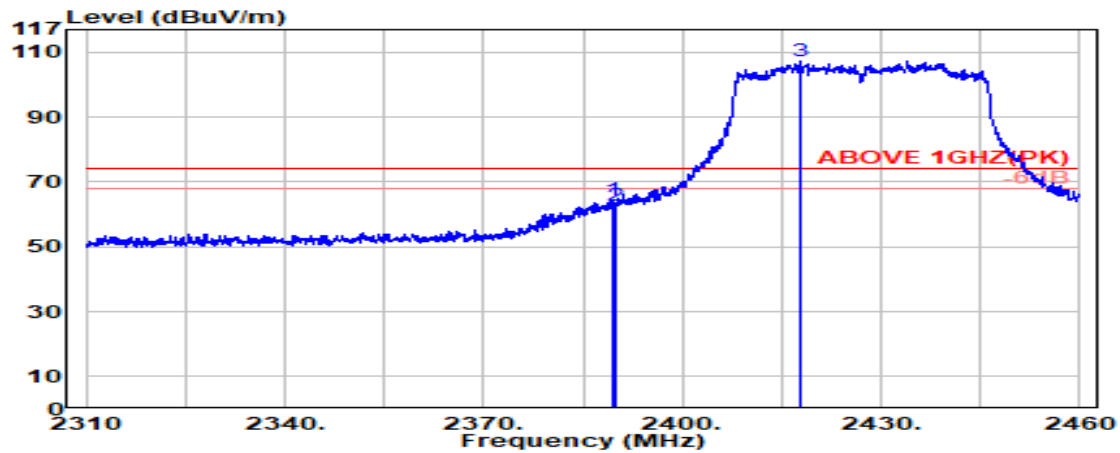

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	28.14	5.72	39.88	70.44	64.42	74.00	9.58	Peak
2390.000	28.14	5.72	39.88	68.93	62.91	74.00	11.09	Peak
@ 2417.875	28.17	5.75	39.88	113.27	107.32	---	---	Peak

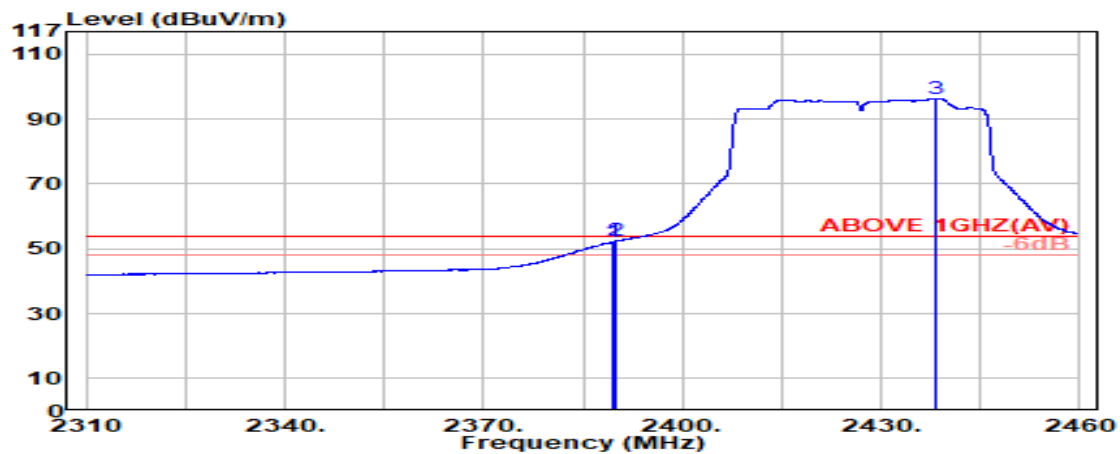

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	28.14	5.72	39.88	58.22	52.21	54.00	1.79	Average
2390.000	28.14	5.72	39.88	58.35	52.33	54.00	1.67	Average
@ 2438.438	28.25	5.78	39.87	102.19	96.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

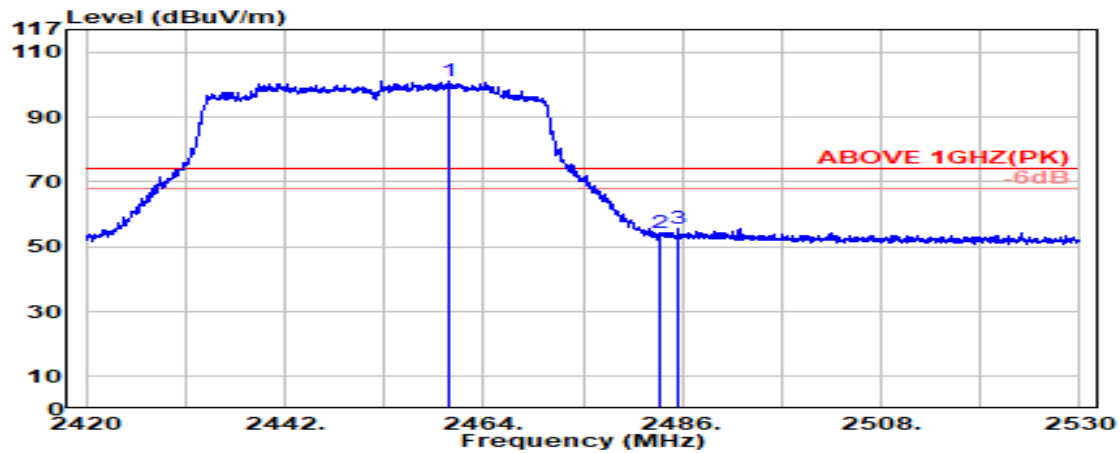

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.242	28.32	5.80	39.87	106.94	101.20	---	---	Peak
2483.500	28.37	5.83	39.87	59.93	54.25	74.00	19.75	Peak
2485.587	28.37	5.83	39.87	61.12	55.45	74.00	18.55	Peak

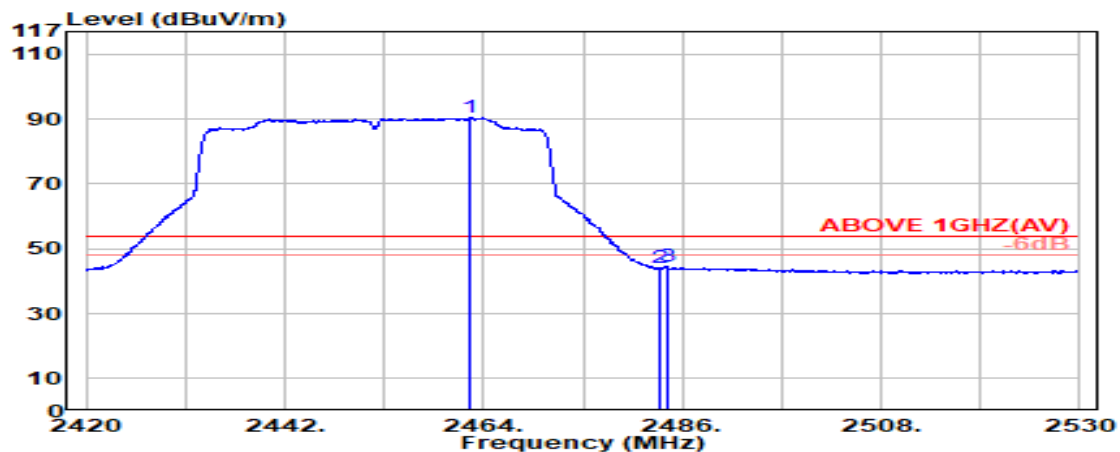

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.579	28.33	5.81	39.87	96.08	90.34	---	---	Average
2483.500	28.37	5.83	39.87	49.81	44.14	54.00	9.86	Average
2484.258	28.37	5.83	39.87	50.38	44.71	54.00	9.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

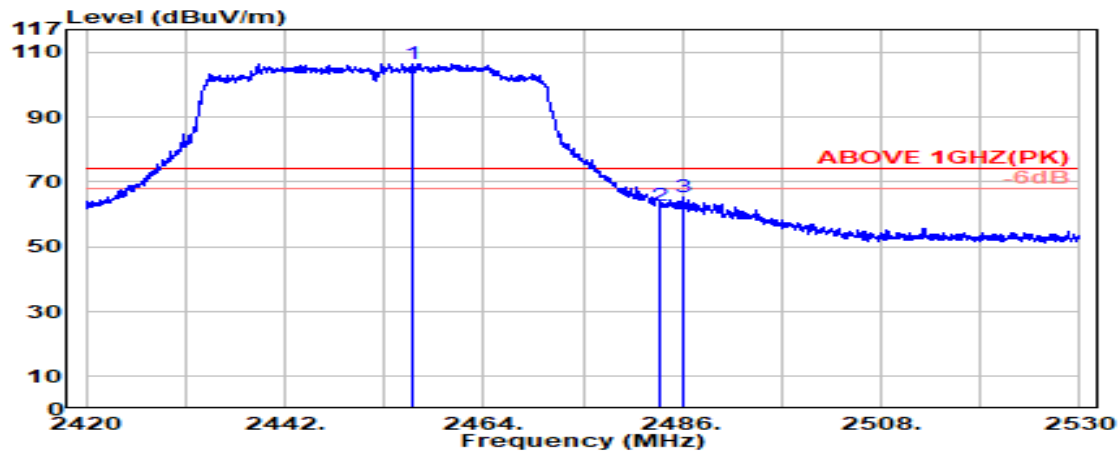

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.163	28.31	5.80	39.87	112.38	106.61	---	---	Peak
	2483.500	28.37	5.83	39.87	68.33	62.66	74.00	11.34	Peak
	2486.183	28.37	5.83	39.87	71.13	65.47	74.00	8.53	Peak

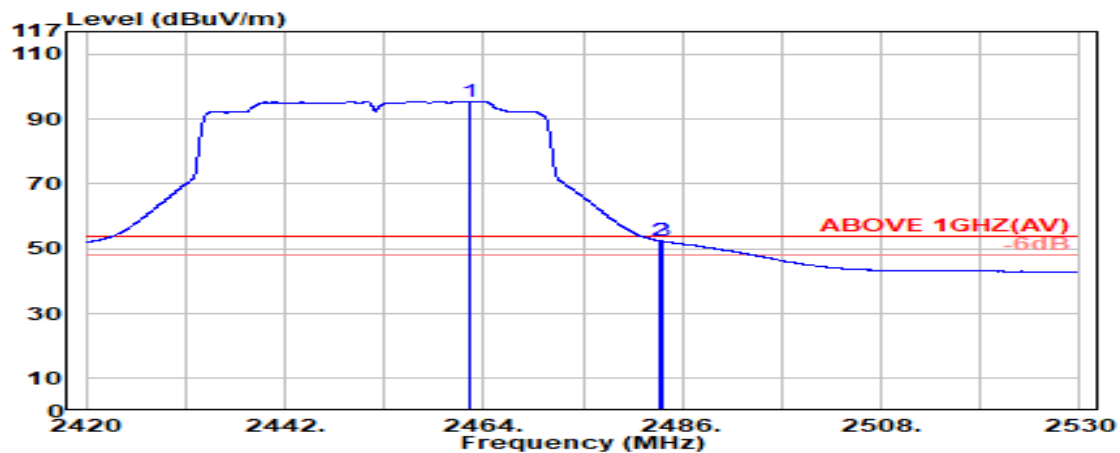

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.488	28.33	5.81	39.87	101.15	95.41	---	---	Average
	2483.500	28.37	5.83	39.87	58.22	52.55	54.00	1.45	Average
	2483.708	28.37	5.83	39.87	58.08	52.41	54.00	1.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

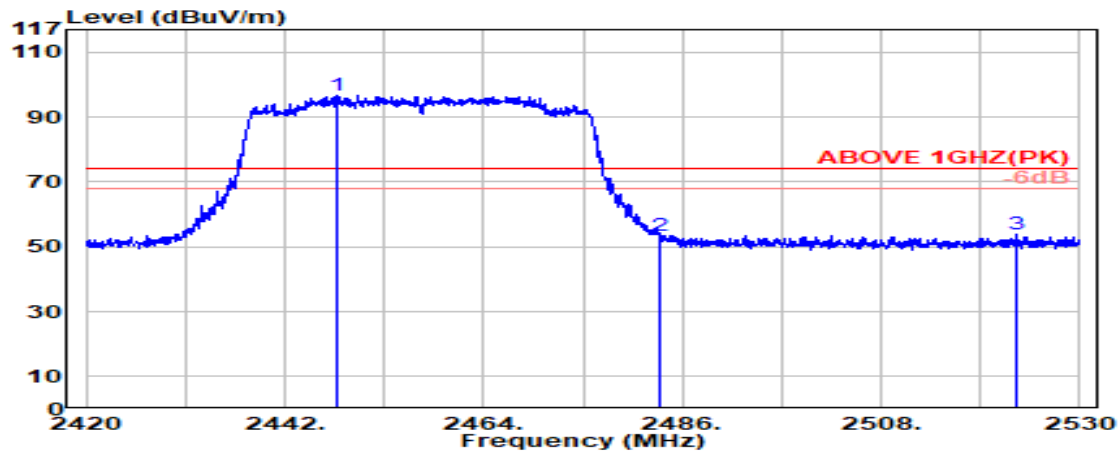

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.867	28.29	5.79	39.87	102.67	96.88	---	---	Peak
2483.500	28.37	5.83	39.87	59.28	53.61	74.00	20.39	Peak
2522.942	28.54	5.88	39.88	59.51	54.05	74.00	19.95	Peak

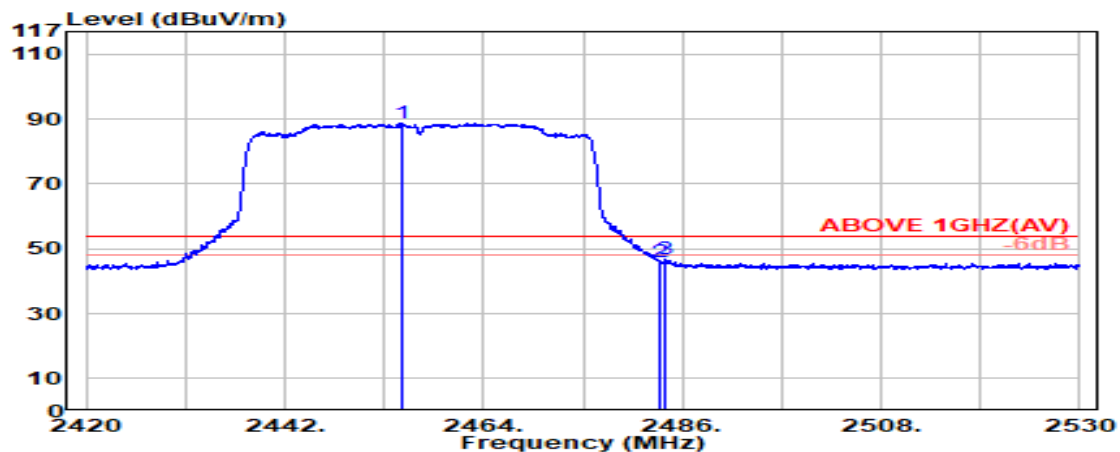

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.971	28.31	5.80	39.87	94.46	88.70	---	---	Average
2483.500	28.37	5.83	39.87	51.76	46.09	54.00	7.91	Average
2484.121	28.37	5.83	39.87	52.56	46.89	54.00	7.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

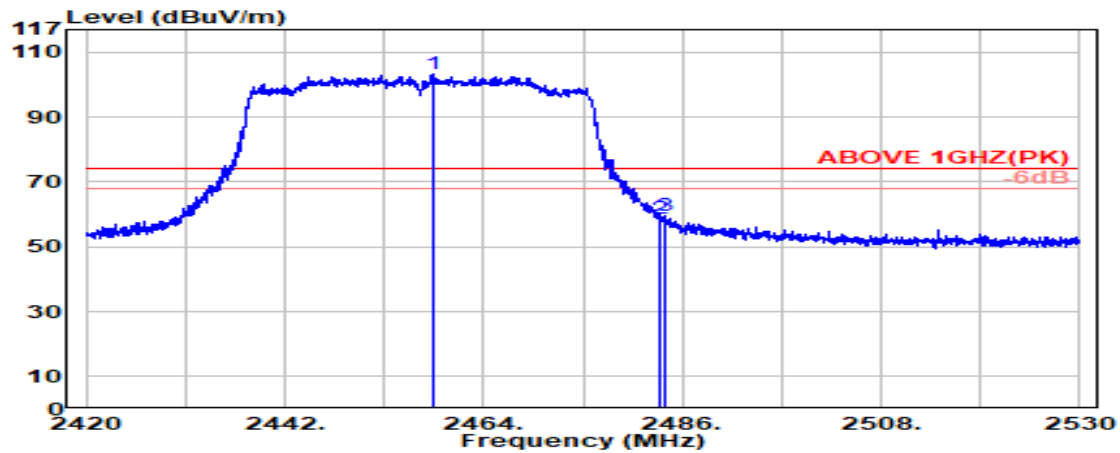

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.317	28.32	5.80	39.87	108.87	103.12	---	---	Peak
2483.500	28.37	5.83	39.87	64.55	58.88	74.00	15.12	Peak
2483.983	28.37	5.83	39.87	65.49	59.82	74.00	14.18	Peak

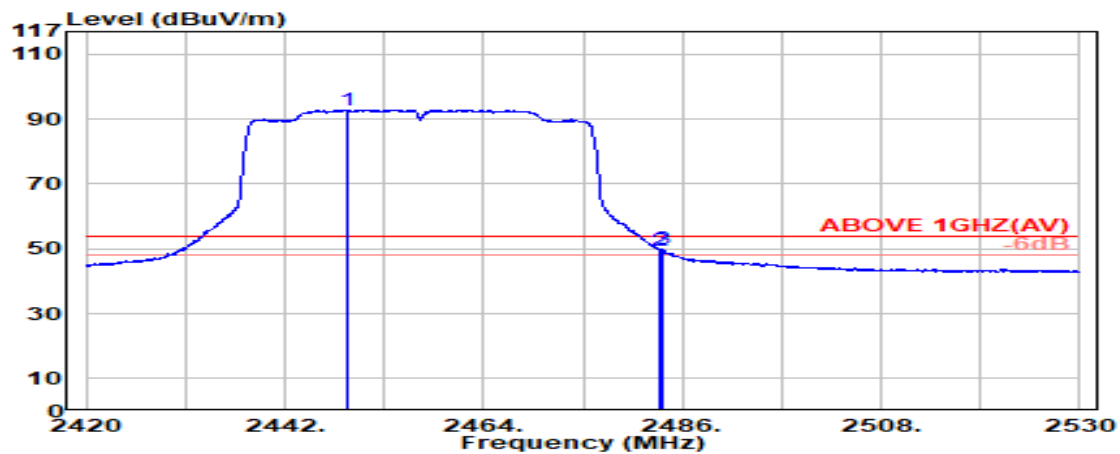

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.875	28.30	5.79	39.87	98.68	92.90	---	---	Average
2483.500	28.37	5.83	39.87	55.16	49.49	54.00	4.51	Average
2483.754	28.37	5.83	39.87	55.37	49.70	54.00	4.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

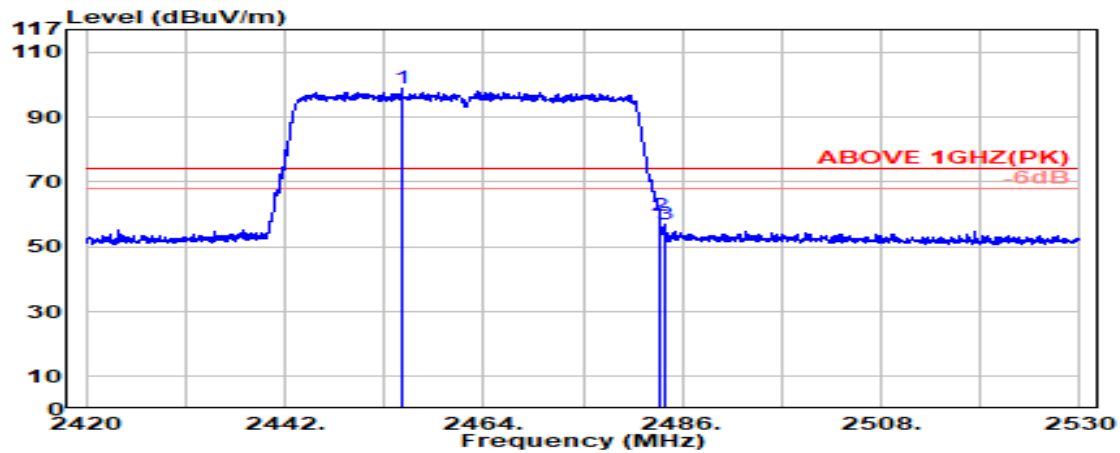

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.879	28.31	5.80	39.87	104.70	98.93	---	---	Peak
	2483.500	28.37	5.83	39.87	65.37	59.70	74.00	14.30	Peak
	2483.983	28.37	5.83	39.87	62.63	56.96	74.00	17.04	Peak

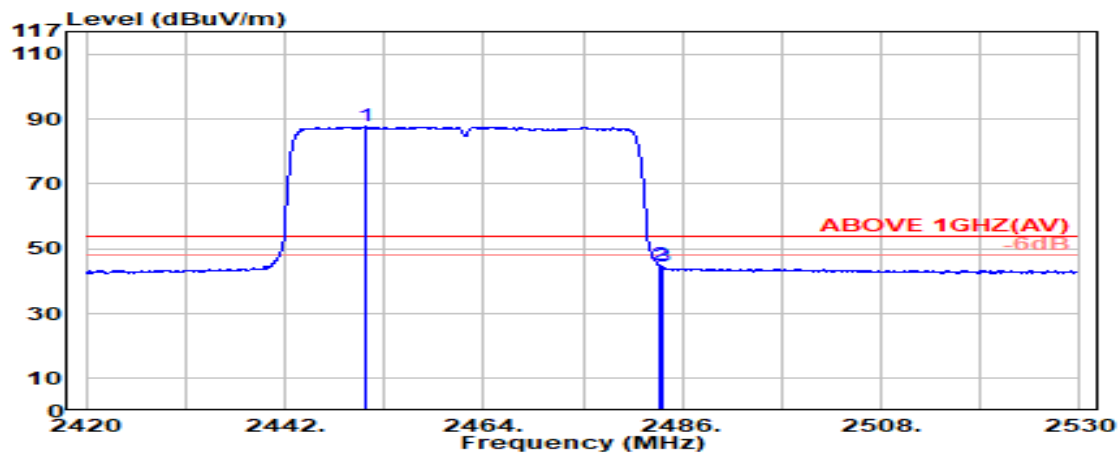

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2451.029	28.30	5.79	39.87	93.49	87.71	---	---	Average
	2483.500	28.37	5.83	39.87	50.64	44.97	54.00	9.03	Average
	2483.708	28.37	5.83	39.87	50.21	44.54	54.00	9.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

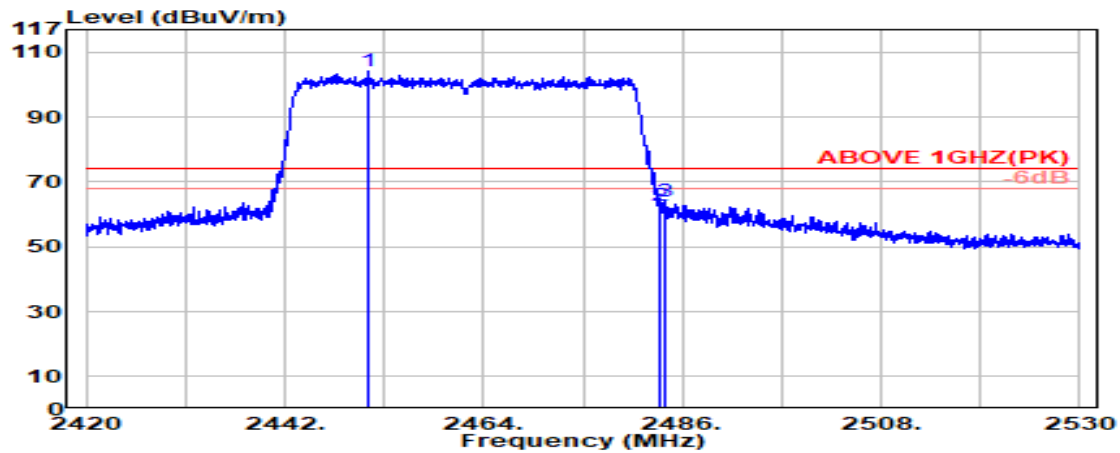

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2451.167	28.30	5.79	39.87	110.17	104.39	---	---	Peak
	2483.500	28.37	5.83	39.87	68.29	62.62	74.00	11.38	Peak
	2484.121	28.37	5.83	39.87	69.75	64.08	74.00	9.92	Peak

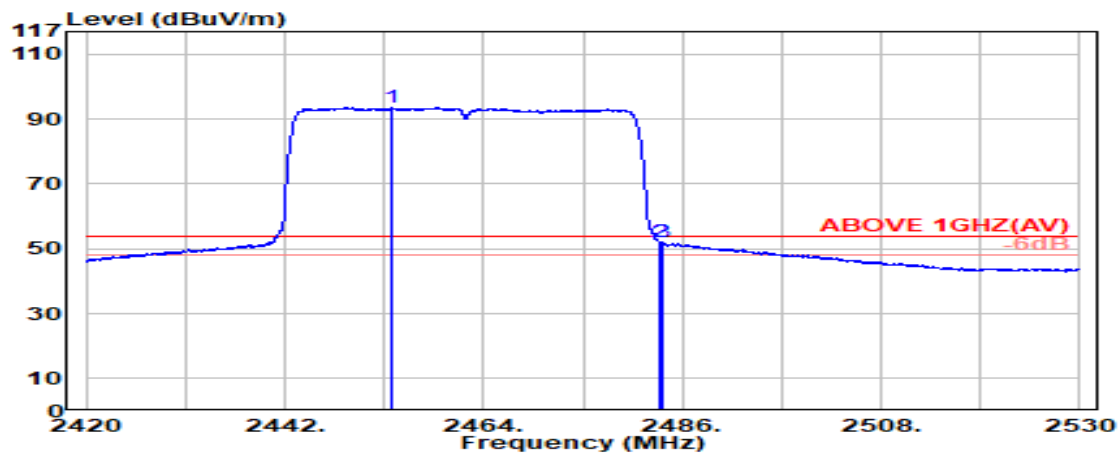

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2453.779	28.31	5.80	39.87	99.29	93.52	---	---	Average
	2483.500	28.37	5.83	39.87	57.96	52.29	54.00	1.71	Average
	2483.708	28.37	5.83	39.87	57.61	51.94	54.00	2.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

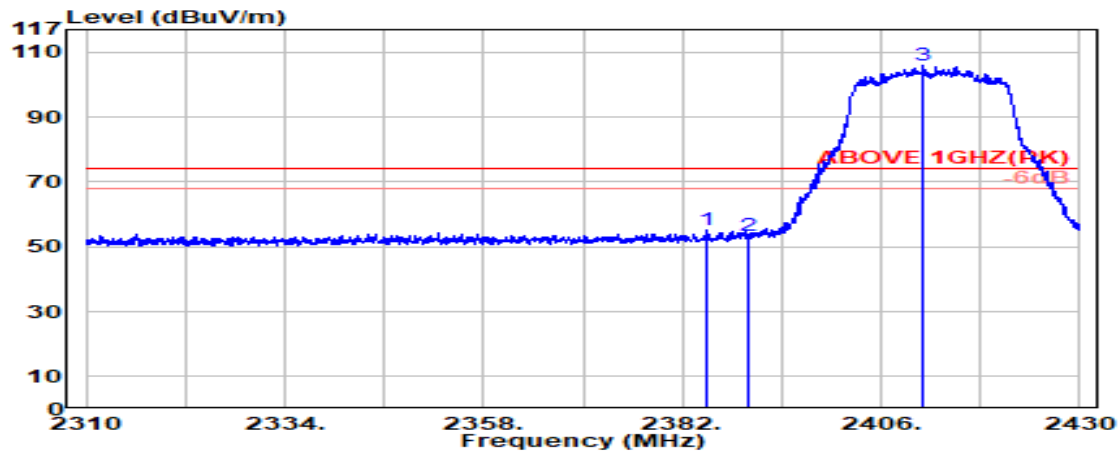

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.000	28.16	5.71	39.88	61.03	55.02	74.00	18.98	Peak
2390.000	28.14	5.72	39.88	59.58	53.57	74.00	20.43	Peak
@ 2411.000	28.14	5.75	39.88	112.03	106.04	---	---	Peak

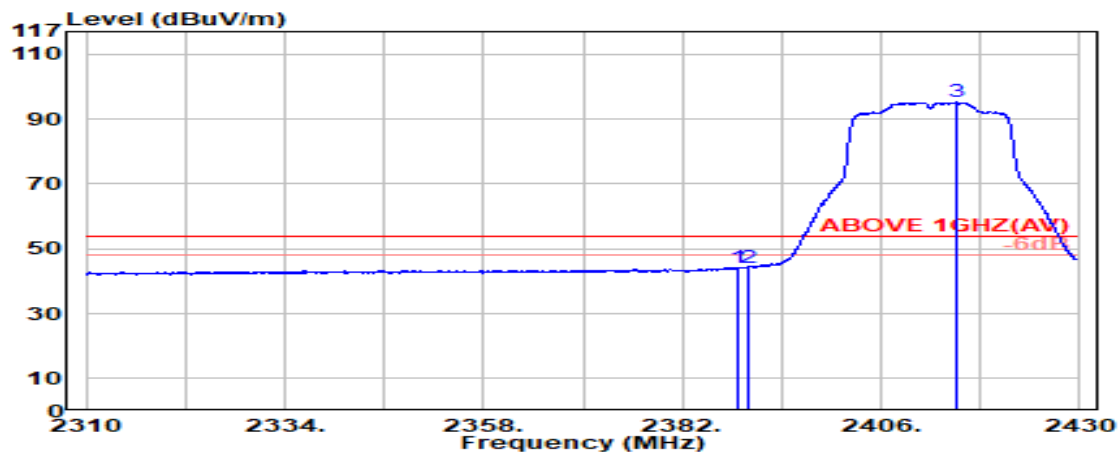

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.14	5.72	39.88	50.25	44.24	54.00	9.76	Average
2390.000	28.14	5.72	39.88	50.18	44.16	54.00	9.84	Average
@ 2415.000	28.16	5.75	39.88	101.18	95.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

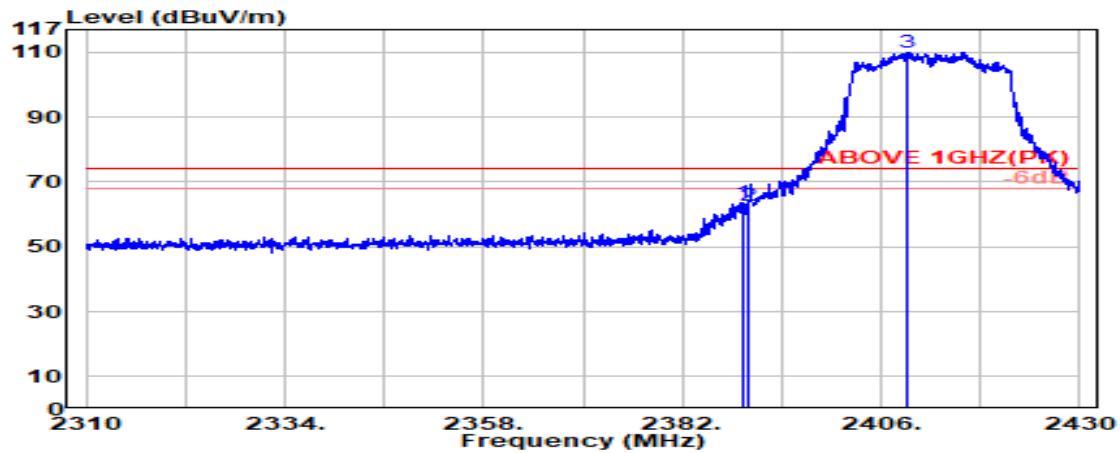

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	69.57	63.55	74.00	10.45	Peak
2390.000	28.14	5.72	39.88	68.93	62.91	74.00	11.09	Peak
@ 2409.000	28.14	5.74	39.88	115.99	110.00	---	---	Peak

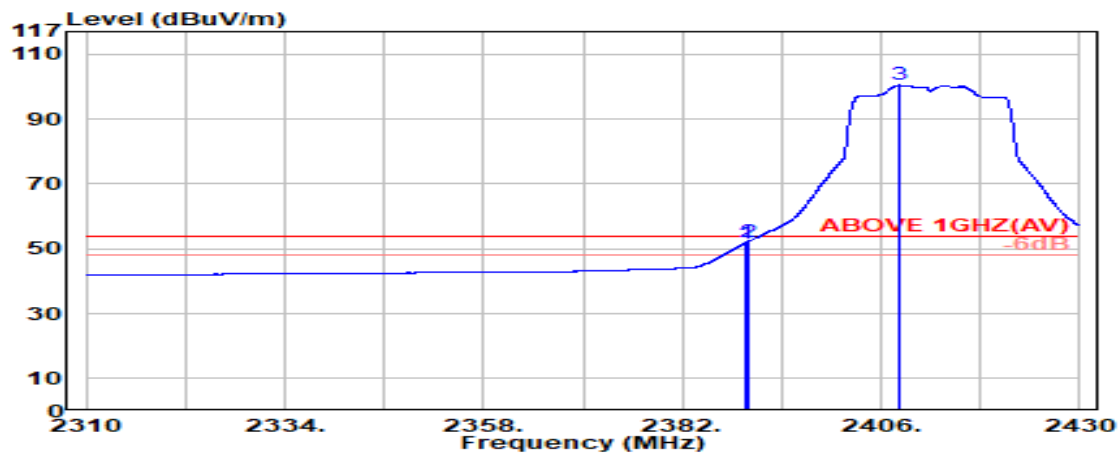

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	57.74	51.73	54.00	2.27	Average
2390.000	28.14	5.72	39.88	58.29	52.27	54.00	1.73	Average
@ 2408.300	28.13	5.74	39.88	106.49	100.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

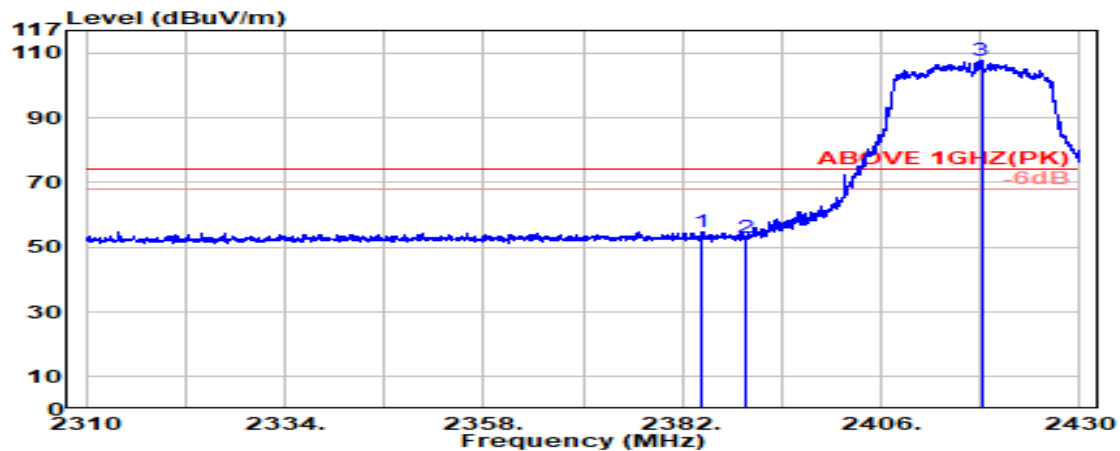

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.200	28.16	5.71	39.88	60.76	54.76	74.00	19.24	Peak
2389.800	28.14	5.72	39.88	59.04	53.02	74.00	20.98	Peak
@ 2418.100	28.17	5.75	39.88	113.75	107.80	---	---	Peak

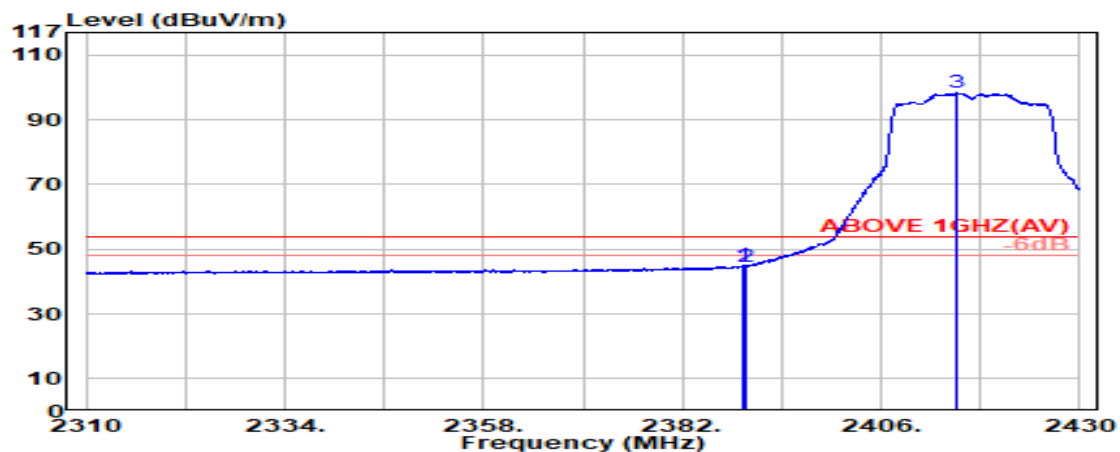

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	50.96	44.94	54.00	9.06	Average
2389.800	28.14	5.72	39.88	50.82	44.81	54.00	9.19	Average
@ 2415.150	28.16	5.75	39.88	104.31	98.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

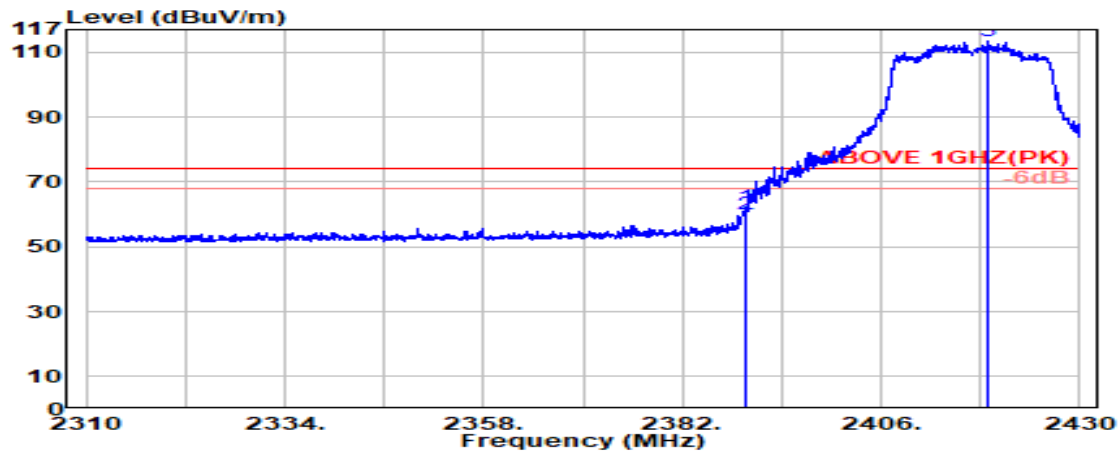

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	68.07	62.05	74.00	11.95	Peak
2389.800	28.14	5.72	39.88	65.86	59.84	74.00	14.16	Peak
@ 2418.850	28.18	5.76	39.88	119.39	113.45	---	---	Peak

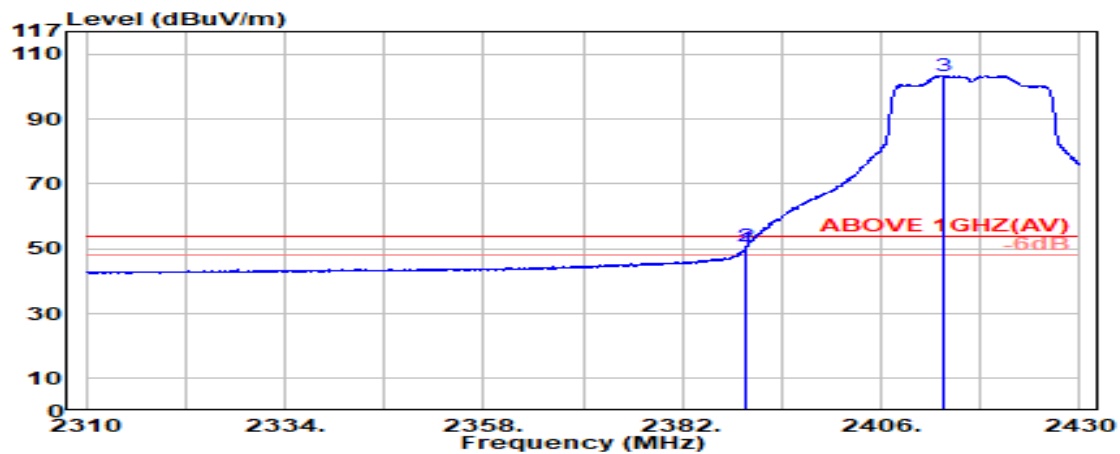

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	55.96	49.95	54.00	4.05	Average
2389.800	28.14	5.72	39.88	56.59	50.57	54.00	3.43	Average
@ 2413.400	28.15	5.75	39.88	109.39	103.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2457MHz
------	----------------	-----------	------------

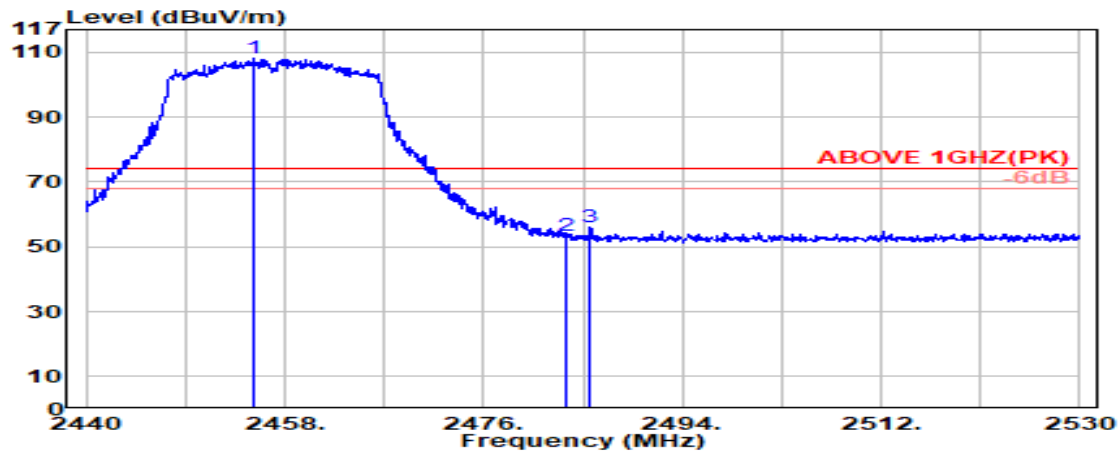

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.200	28.31	5.80	39.87	114.10	108.34	---	---	Peak
2483.500	28.37	5.83	39.87	59.16	53.48	74.00	20.52	Peak
2485.700	28.37	5.83	39.87	61.87	56.20	74.00	17.80	Peak

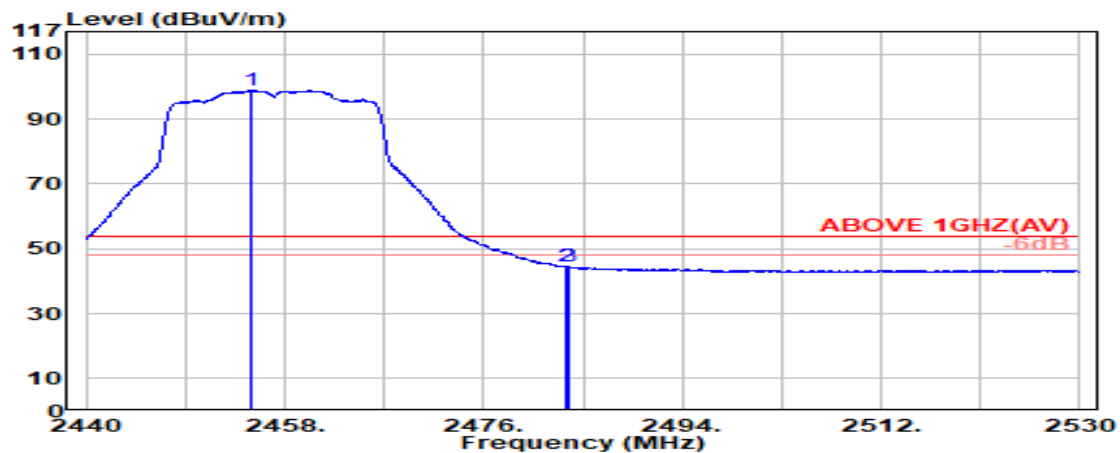

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.950	28.31	5.80	39.87	104.59	98.83	---	---	Average
2483.500	28.37	5.83	39.87	50.18	44.51	54.00	9.49	Average
2483.700	28.37	5.83	39.87	50.11	44.44	54.00	9.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2457MHz
------	----------------	-----------	------------

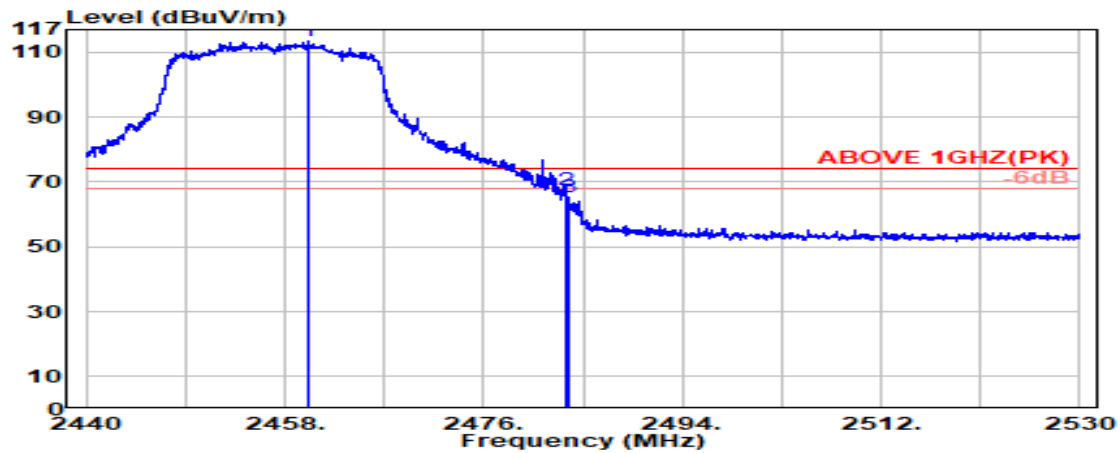

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2460.100	28.32	5.80	39.87	119.16	113.41	---	---	Peak
	2483.500	28.37	5.83	39.87	73.30	67.63	74.00	6.37	Peak
	2483.700	28.37	5.83	39.87	71.23	65.55	74.00	8.45	Peak

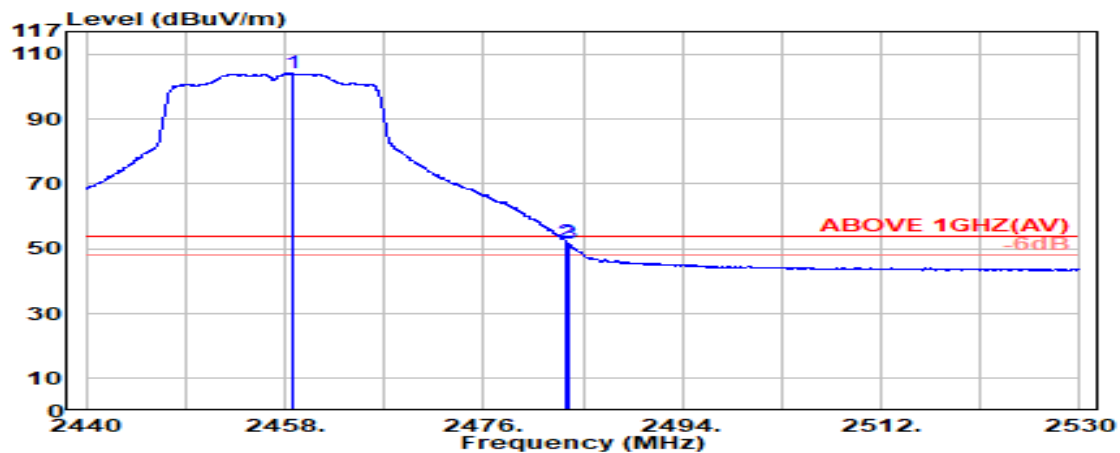

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2458.700	28.32	5.80	39.87	109.98	104.22	---	---	Average
	2483.500	28.37	5.83	39.87	57.86	52.18	54.00	1.82	Average
	2483.750	28.37	5.83	39.87	57.41	51.73	54.00	2.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

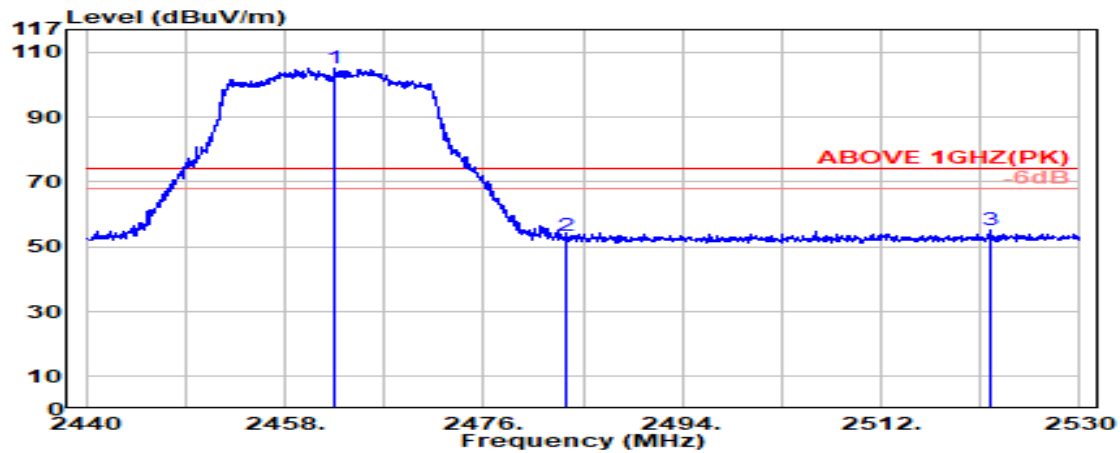

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.600	28.33	5.81	39.87	110.95	105.21	---	---	Average
	2483.500	28.37	5.83	39.87	59.06	53.39	74.00	20.61	Average
	2521.950	28.53	5.88	39.88	60.65	55.18	74.00	18.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

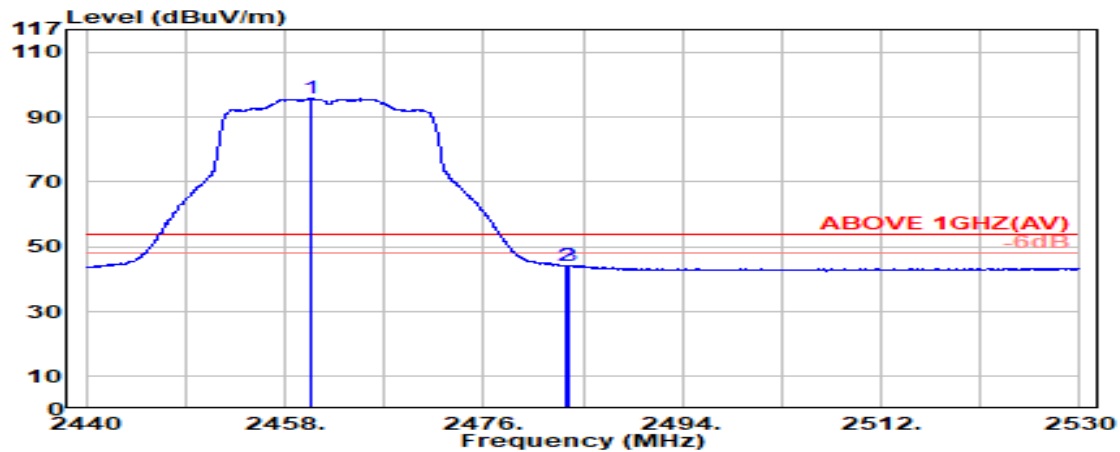

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.400	28.32	5.80	39.87	101.67	95.92	---	---	Average
	2483.500	28.37	5.83	39.87	49.71	44.04	54.00	9.96	Average
	2483.700	28.37	5.83	39.87	50.02	44.35	54.00	9.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

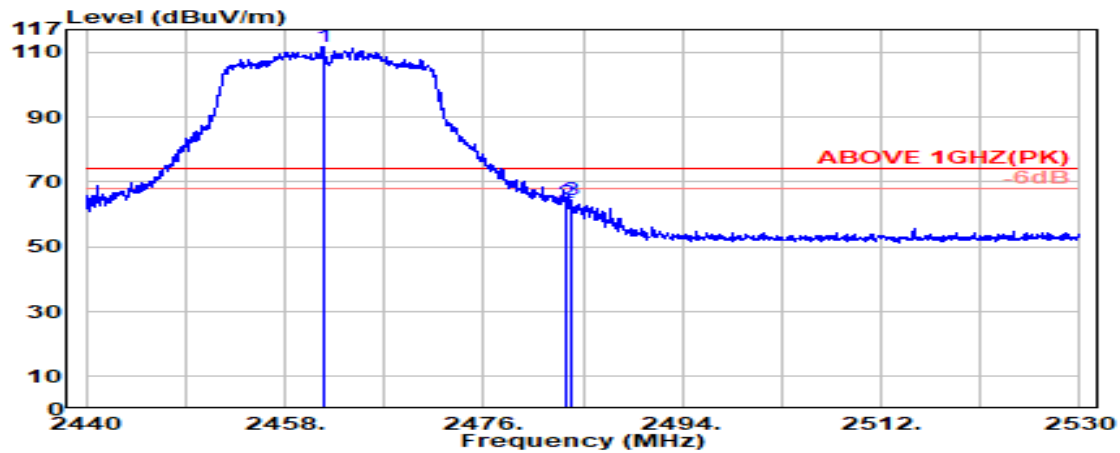

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.450	28.32	5.81	39.87	117.58	111.83	---	---	Peak
	2483.500	28.37	5.83	39.87	69.47	63.80	74.00	10.20	Peak
	2483.950	28.37	5.83	39.87	70.21	64.54	74.00	9.46	Peak

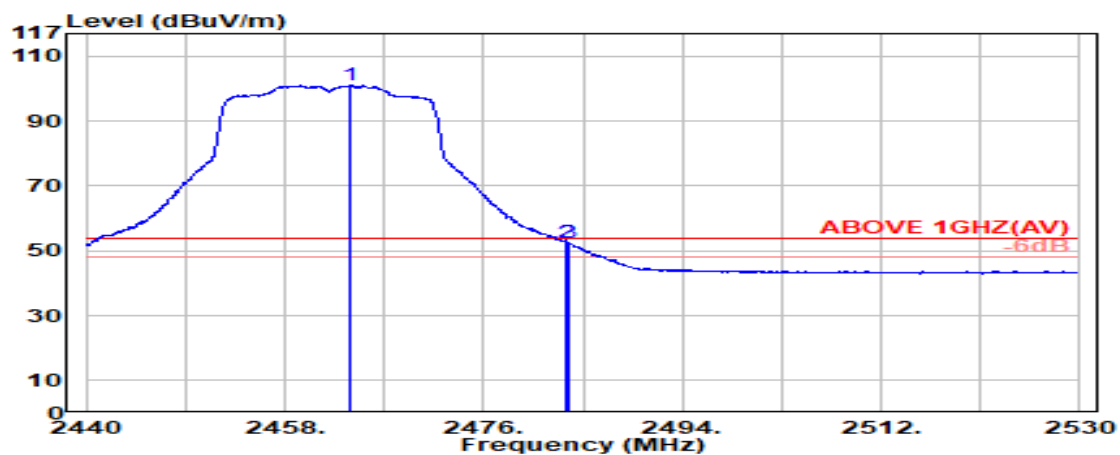

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.000	28.33	5.81	39.87	106.74	101.00	---	---	Average
	2483.500	28.37	5.83	39.87	58.20	52.53	54.00	1.47	Average
	2483.750	28.37	5.83	39.87	58.06	52.39	54.00	1.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

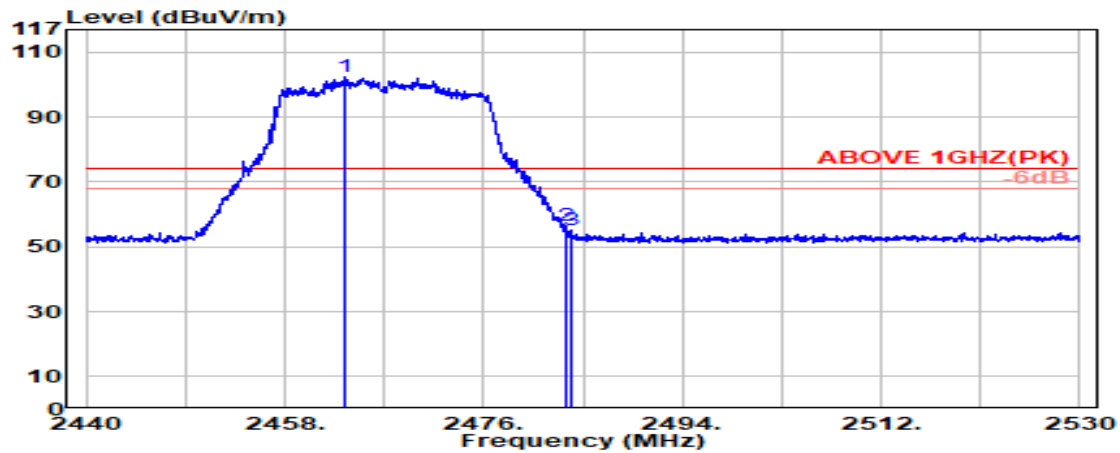

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.400	28.33	5.81	39.87	108.18	102.44	---	---	Peak
	2483.500	28.37	5.83	39.87	62.03	56.35	74.00	17.65	Peak
	2484.000	28.37	5.83	39.87	60.86	55.19	74.00	18.81	Peak

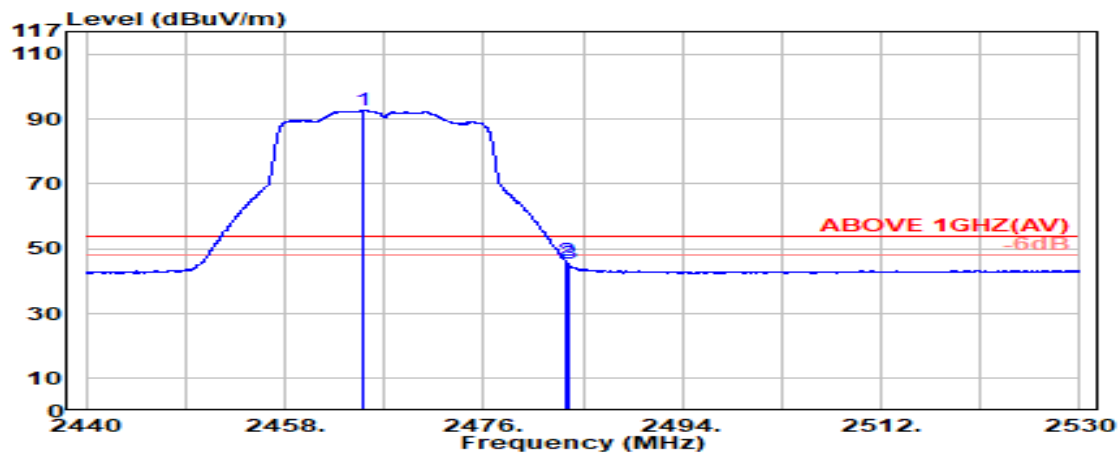

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.150	28.33	5.81	39.87	98.44	92.70	---	---	Average
	2483.500	28.37	5.83	39.87	51.81	46.14	54.00	7.86	Average
	2483.700	28.37	5.83	39.87	50.96	45.28	54.00	8.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

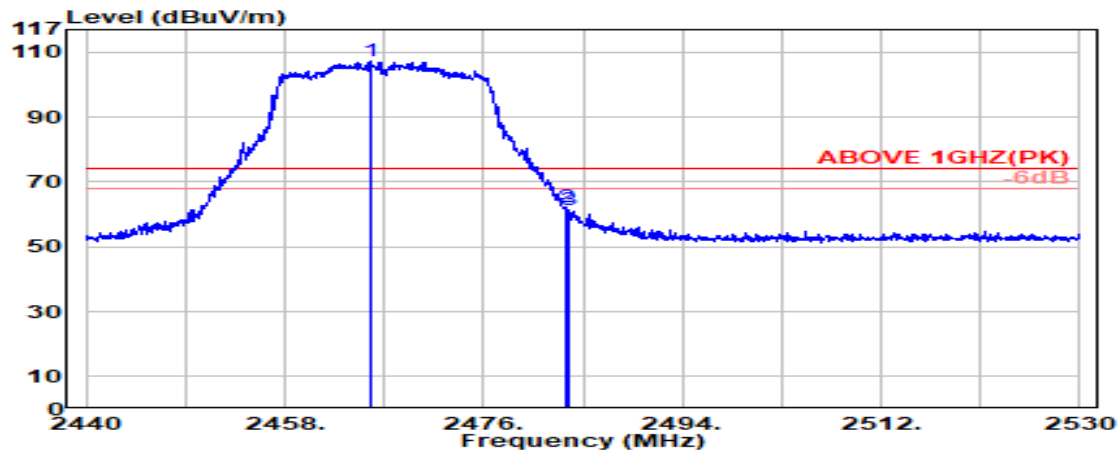

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.850	28.33	5.81	39.87	112.87	107.14	---	---	Peak
	2483.500	28.37	5.83	39.87	68.01	62.34	74.00	11.66	Peak
	2483.700	28.37	5.83	39.87	66.95	61.27	74.00	12.73	Peak

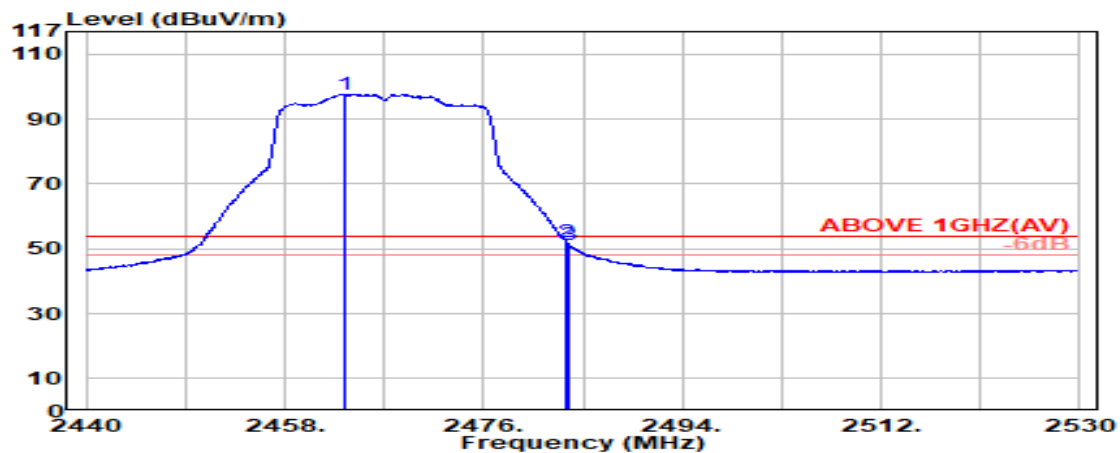


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.400	28.33	5.81	39.87	103.43	97.69	---	---	Average
	2483.500	28.37	5.83	39.87	57.83	52.16	54.00	1.84	Average
	2483.700	28.37	5.83	39.87	57.02	51.34	54.00	2.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

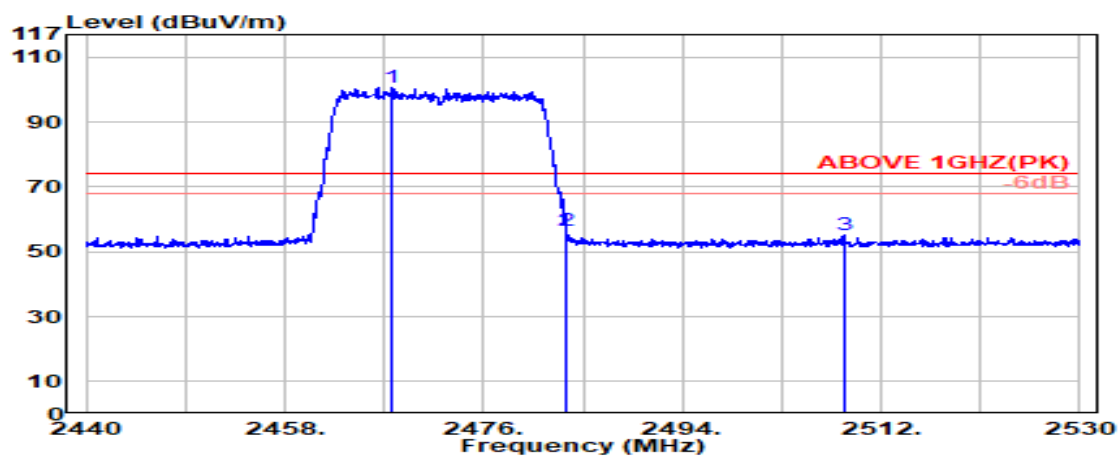

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.650	28.34	5.81	39.87	106.53	100.81	---	---	Peak
	2483.500	28.37	5.83	39.87	62.32	56.64	74.00	17.36	Peak
	2508.600	28.45	5.86	39.87	60.63	55.07	74.00	18.93	Peak

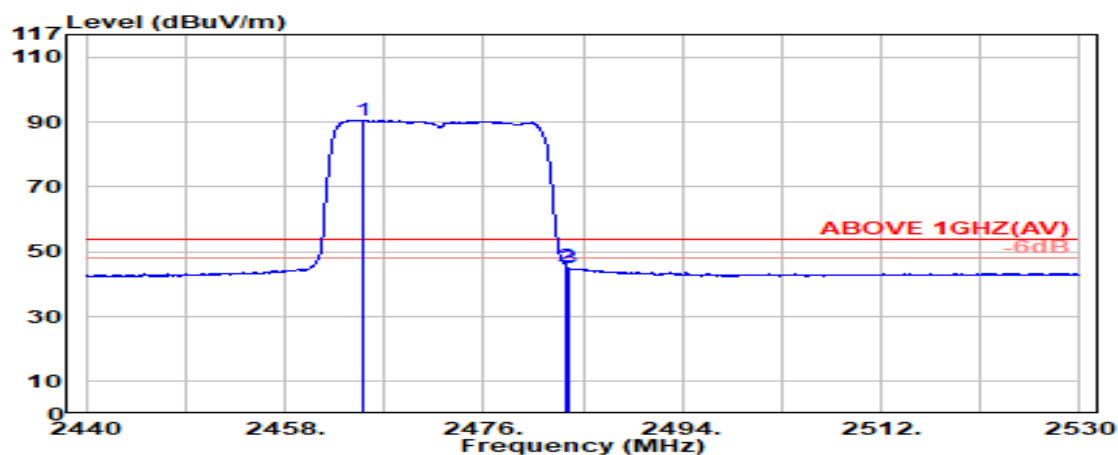

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.33	5.81	39.87	96.45	90.72	---	---	Average
2483.500	28.37	5.83	39.87	50.98	45.31	54.00	8.69	Average
2483.700	28.37	5.83	39.87	50.86	45.18	54.00	8.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

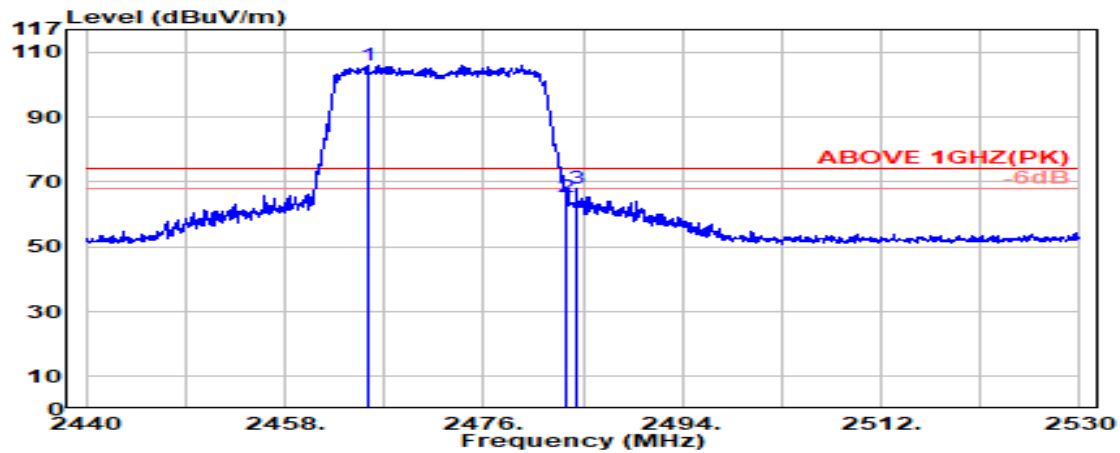

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.450	28.33	5.81	39.87	111.71	105.98	---	---	Peak
	2483.500	28.37	5.83	39.87	71.19	65.52	74.00	8.48	Peak
	2484.400	28.37	5.83	39.87	73.64	67.97	74.00	6.03	Peak

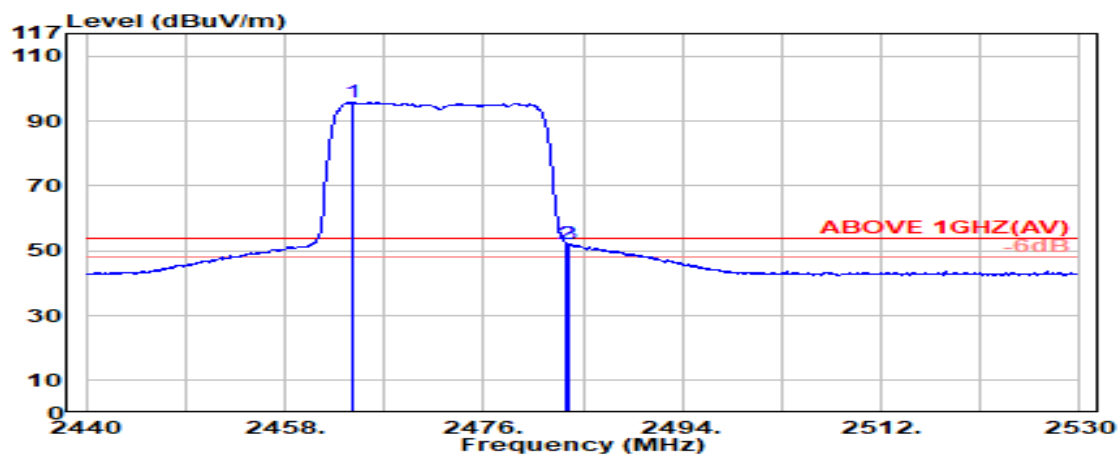

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.050	28.33	5.81	39.87	101.73	96.00	---	---	Average
	2483.500	28.37	5.83	39.87	57.84	52.17	54.00	1.83	Average
	2483.750	28.37	5.83	39.87	57.63	51.96	54.00	2.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

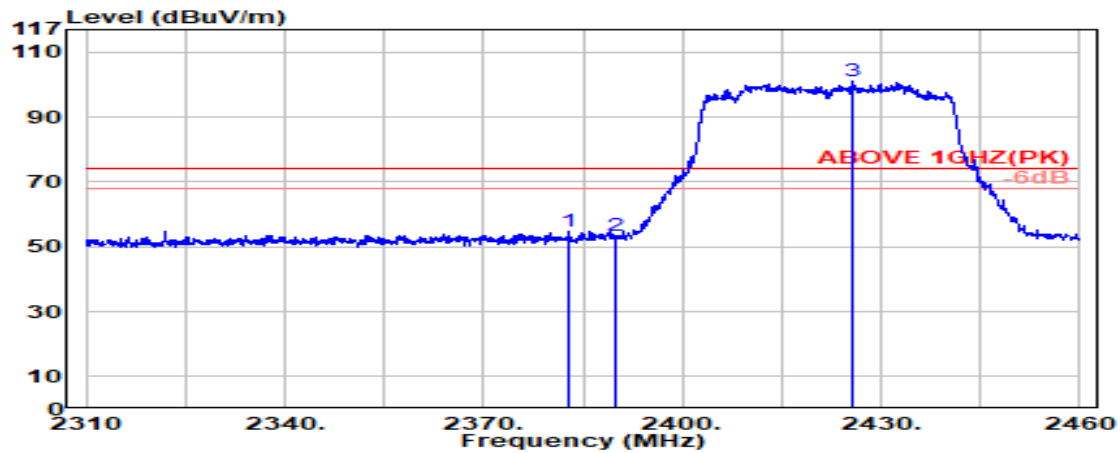

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2382.917	28.17	5.71	39.88	60.88	54.88	74.00	19.12	Peak
2390.000	28.14	5.72	39.88	59.62	53.60	74.00	20.40	Peak
@ 2425.750	28.20	5.76	39.88	107.02	101.12	---	---	Peak

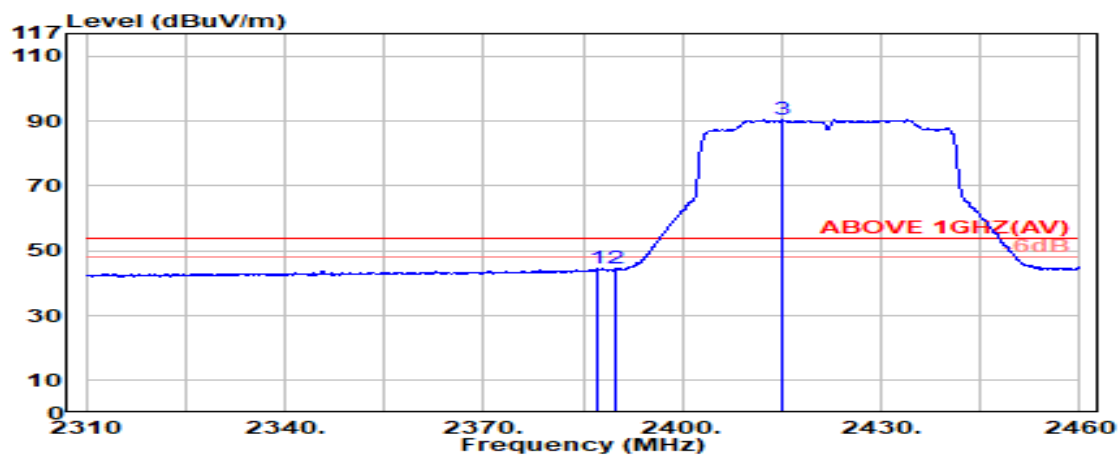

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.000	28.15	5.72	39.88	50.41	44.40	54.00	9.60	Average
2390.000	28.14	5.72	39.88	50.56	44.54	54.00	9.46	Average
@ 2415.250	28.16	5.75	39.88	96.32	90.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

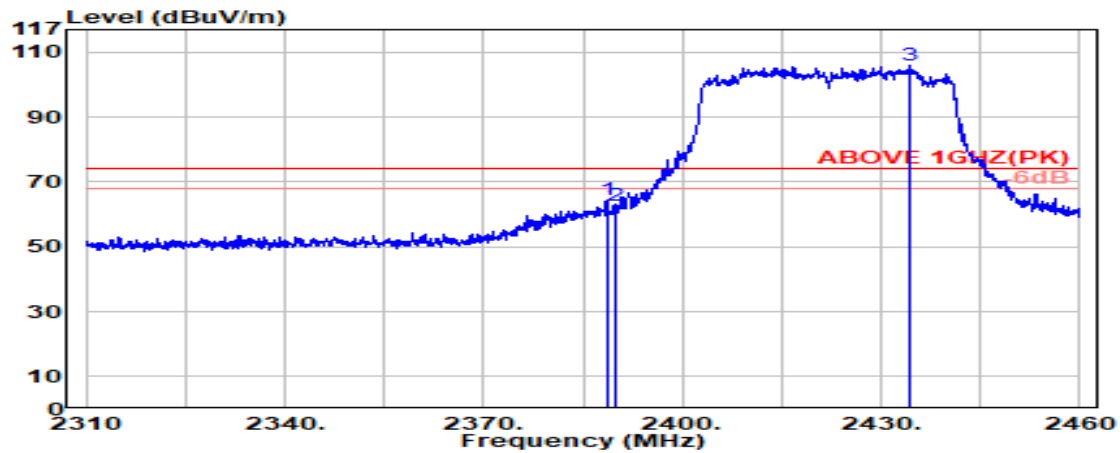

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.583	28.15	5.72	39.88	70.39	64.38	74.00	9.62	Peak
2390.000	28.14	5.72	39.88	68.67	62.66	74.00	11.34	Peak
@ 2434.417	28.24	5.77	39.87	111.79	105.92	---	---	Peak

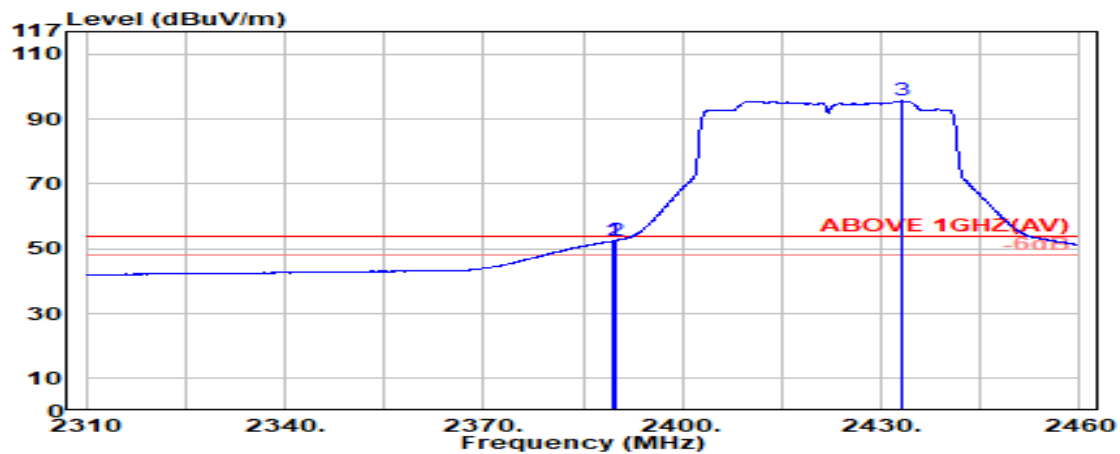

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.583	28.14	5.72	39.88	58.46	52.44	54.00	1.56	Average
2390.000	28.14	5.72	39.88	58.57	52.55	54.00	1.45	Average
@ 2433.167	28.23	5.77	39.87	101.46	95.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

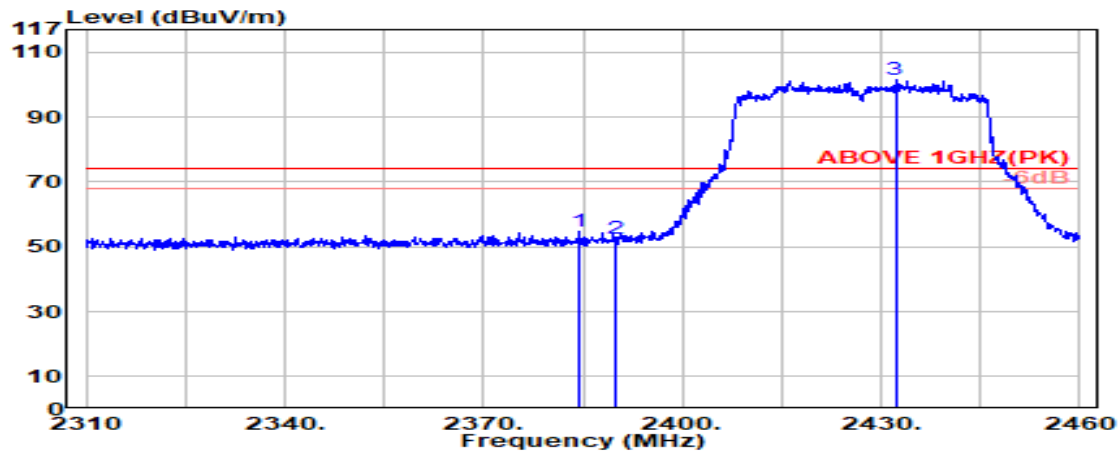

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.333	28.16	5.71	39.88	60.54	54.54	74.00	19.46	Peak
2390.000	28.14	5.72	39.88	58.35	52.33	74.00	21.67	Peak
@ 2432.167	28.23	5.77	39.87	107.34	101.46	---	---	Peak

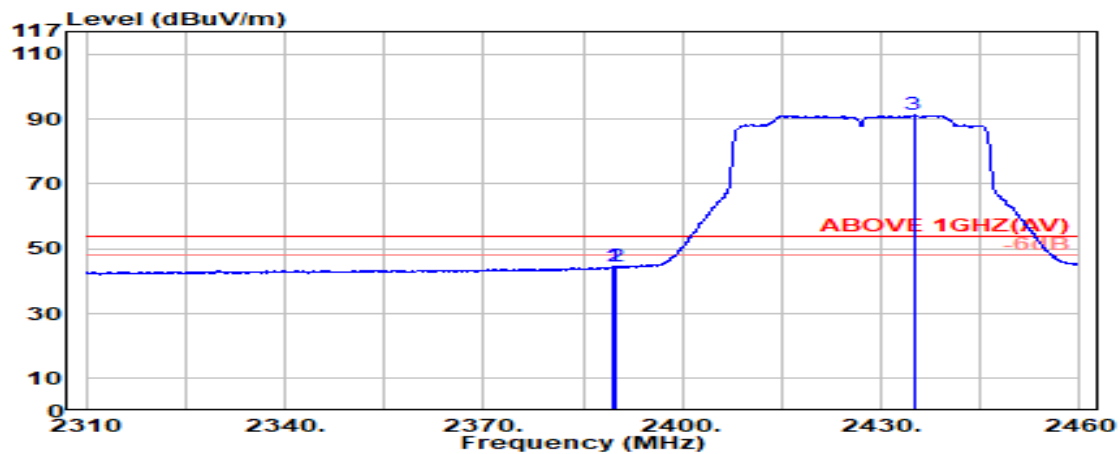

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.583	28.14	5.72	39.88	50.43	44.41	54.00	9.59	Average
2390.000	28.14	5.72	39.88	50.47	44.46	54.00	9.54	Average
@ 2434.917	28.24	5.77	39.87	97.07	91.21	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

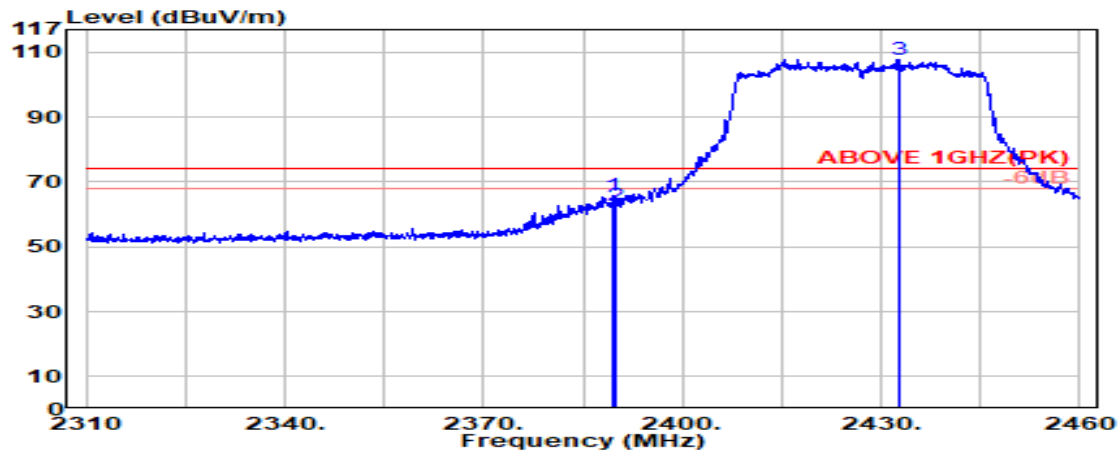

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	71.64	65.62	74.00	8.38	Peak
2390.000	28.14	5.72	39.88	68.71	62.70	74.00	11.30	Peak
@ 2432.583	28.23	5.77	39.87	113.73	107.86	---	---	Peak

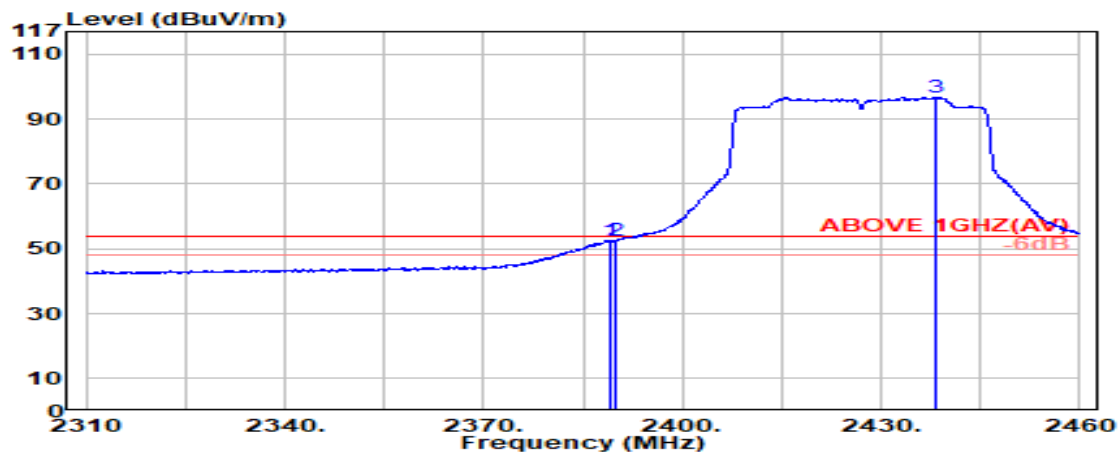

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	58.54	52.52	54.00	1.48	Average
2390.000	28.14	5.72	39.88	58.56	52.55	54.00	1.45	Average
@ 2438.417	28.25	5.78	39.87	102.70	96.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

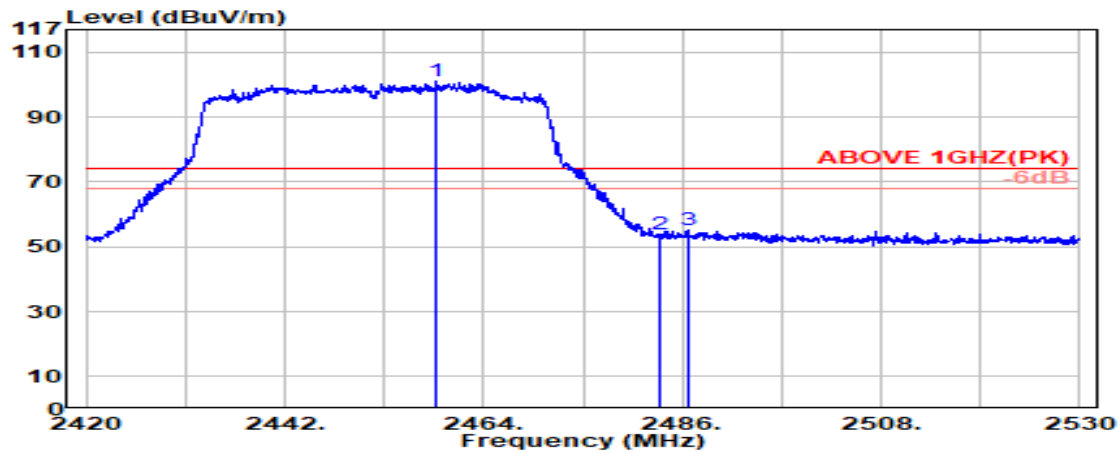

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2458.744	28.32	5.80	39.87	106.93	101.17	---	---	Peak
	2483.500	28.37	5.83	39.87	59.57	53.90	74.00	20.10	Peak
	2486.733	28.37	5.83	39.87	61.06	55.40	74.00	18.60	Peak

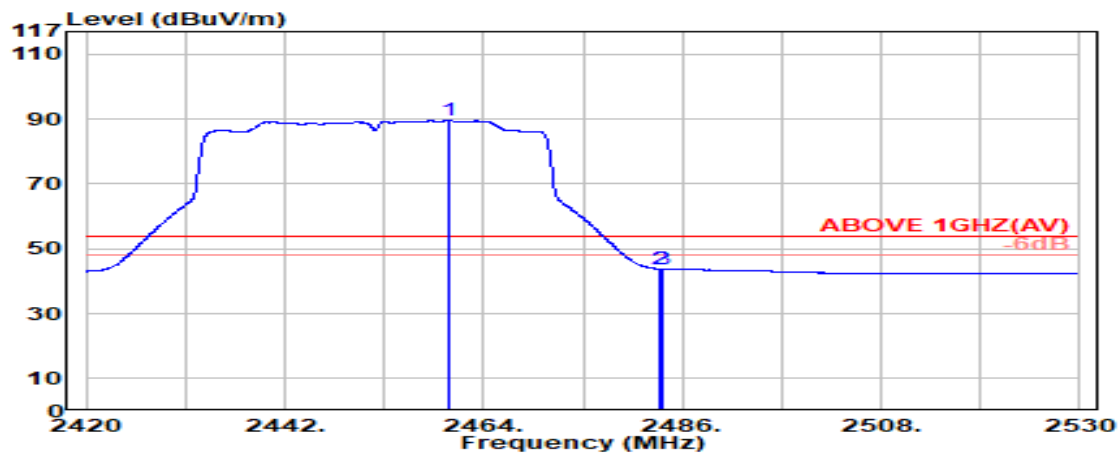

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2460.150	28.32	5.80	39.87	95.38	89.63	---	---	Average
	2483.500	28.37	5.83	39.87	49.42	43.75	54.00	10.25	Average
	2483.861	28.37	5.83	39.87	49.41	43.74	54.00	10.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

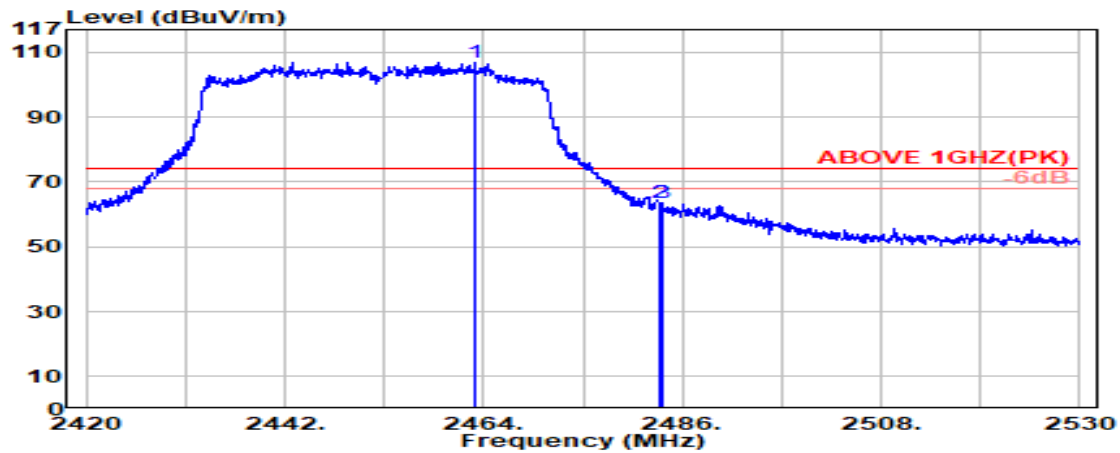

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.022	28.33	5.81	39.87	112.70	106.96	---	---	Peak
2483.500	28.37	5.83	39.87	69.09	63.42	74.00	10.58	Peak
2483.678	28.37	5.83	39.87	69.03	63.36	74.00	10.64	Peak

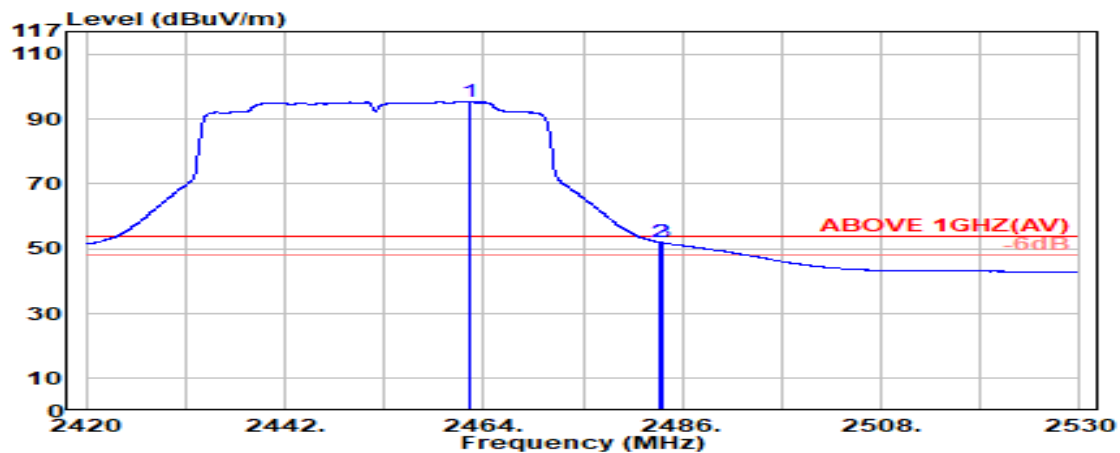

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.594	28.33	5.81	39.87	100.97	95.23	---	---	Average
2483.500	28.37	5.83	39.87	57.65	51.97	54.00	2.03	Average
2483.678	28.37	5.83	39.87	57.59	51.92	54.00	2.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

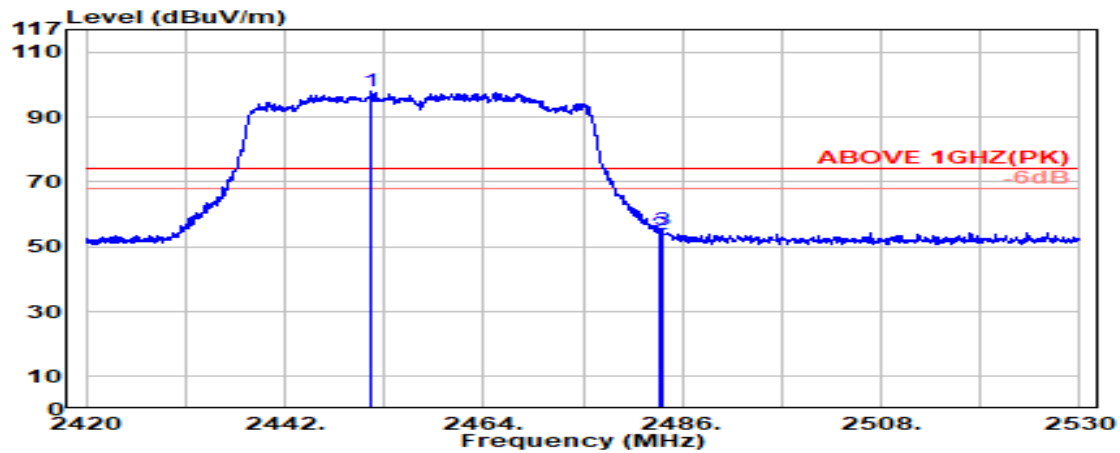

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2451.533	28.30	5.79	39.87	103.62	97.84	---	---	Peak
	2483.500	28.37	5.83	39.87	59.71	54.04	74.00	19.96	Peak
	2483.678	28.37	5.83	39.87	60.72	55.04	74.00	18.96	Peak

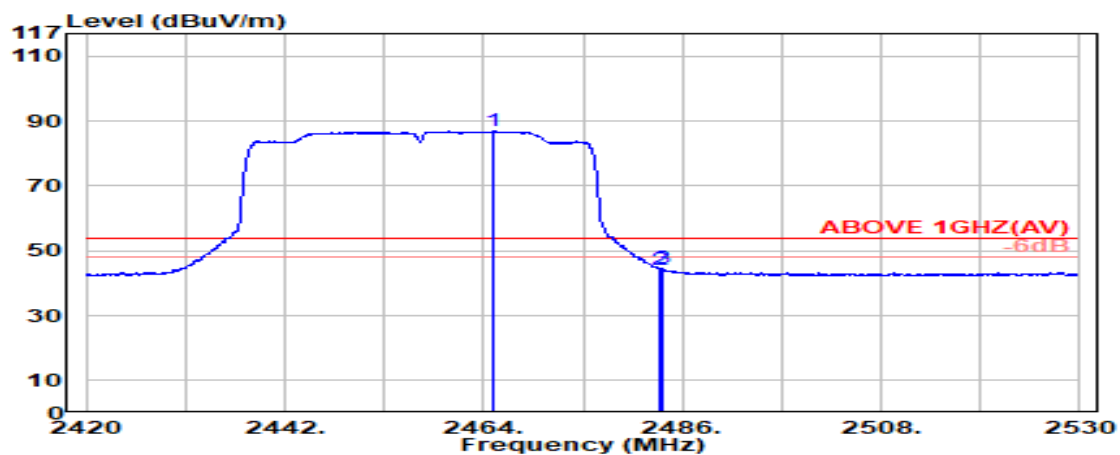

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.100	28.33	5.81	39.87	92.67	86.94	---	---	Average
	2483.500	28.37	5.83	39.87	49.91	44.24	54.00	9.76	Average
	2483.678	28.37	5.83	39.87	50.18	44.50	54.00	9.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

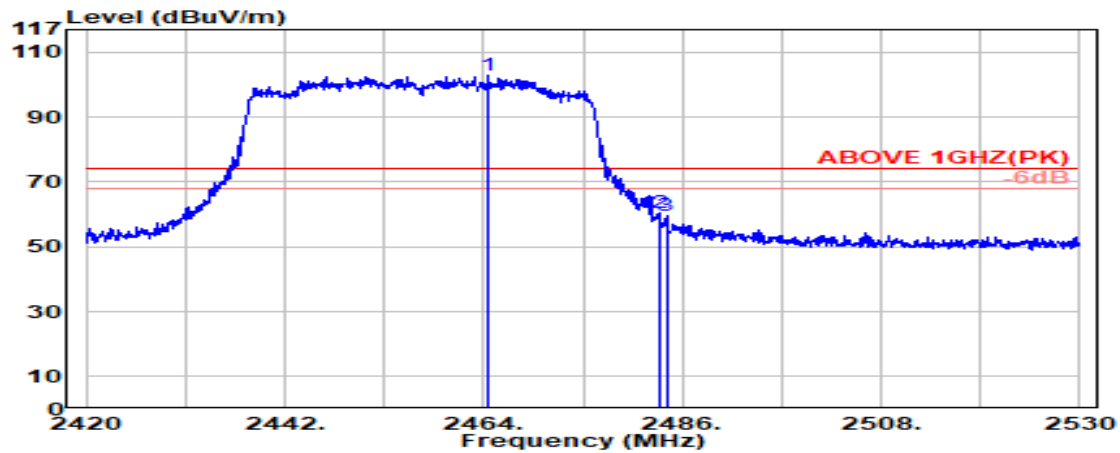

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.550	28.33	5.81	39.87	108.45	102.71	---	---	Peak
	2483.500	28.37	5.83	39.87	66.08	60.41	74.00	13.59	Peak
	2484.228	28.37	5.83	39.87	65.19	59.52	74.00	14.48	Peak

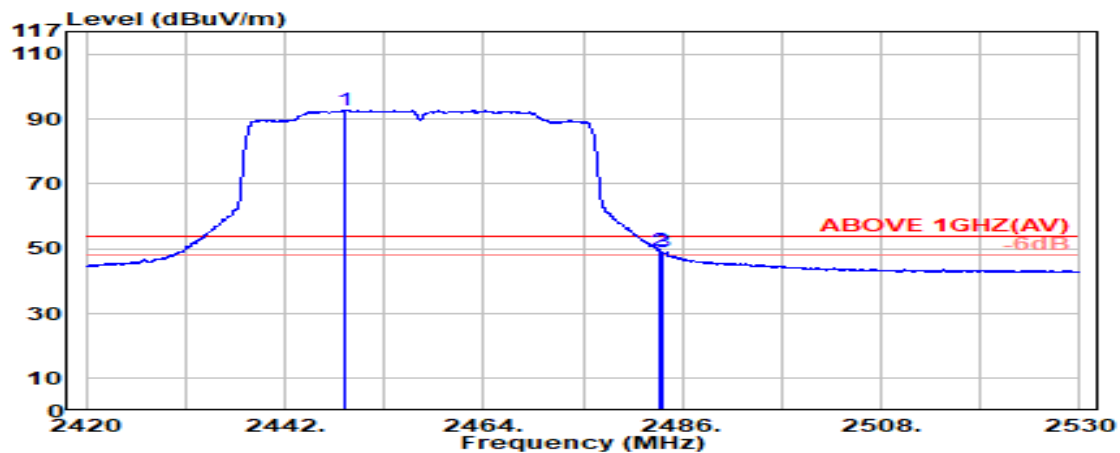

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2448.722	28.29	5.79	39.87	98.64	92.85	---	---	Average
	2483.500	28.37	5.83	39.87	54.94	49.26	54.00	4.74	Average
	2483.678	28.37	5.83	39.87	54.76	49.09	54.00	4.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

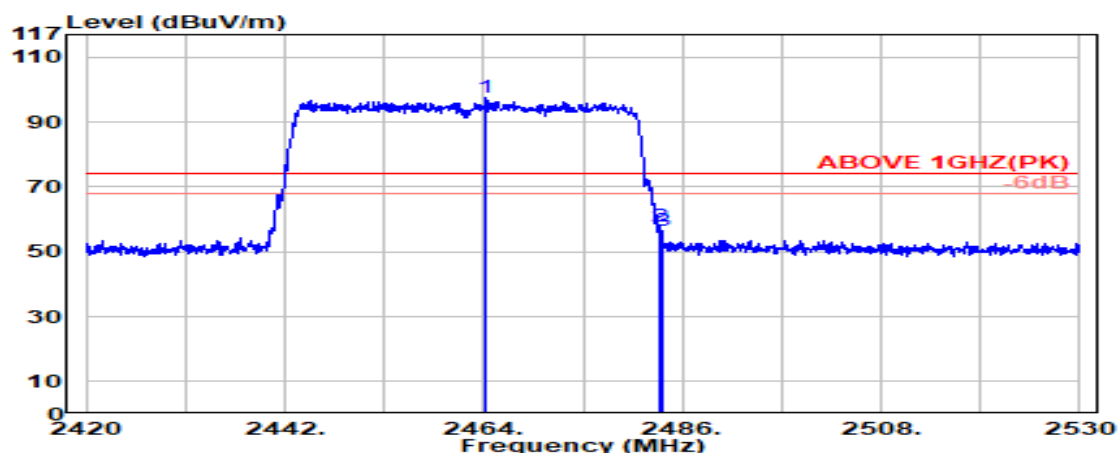

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.306	28.33	5.81	39.87	103.10	97.37	---	---	Peak
2483.500	28.37	5.83	39.87	63.41	57.74	74.00	16.26	Peak
2483.739	28.37	5.83	39.87	62.00	56.32	74.00	17.68	Peak

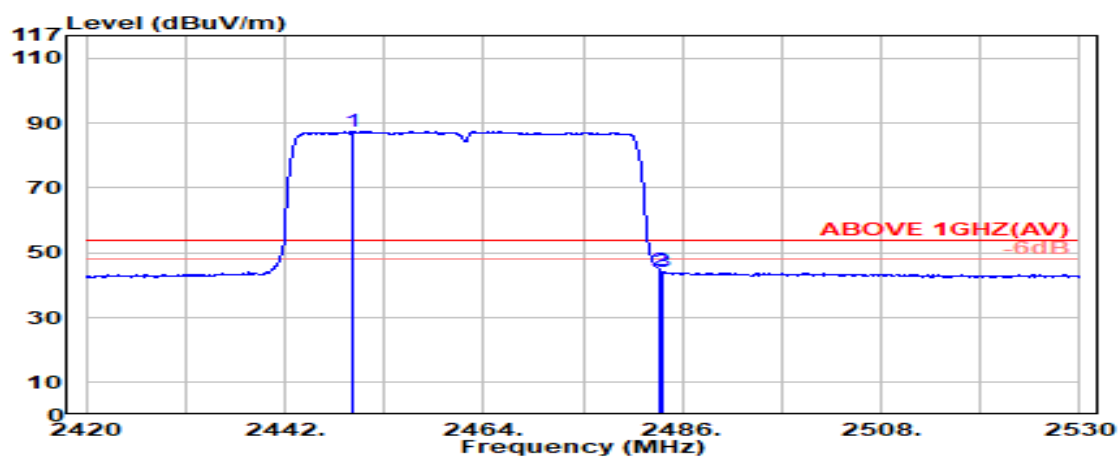

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.517	28.30	5.79	39.87	93.17	87.39	---	---	Average
2483.500	28.37	5.83	39.87	50.13	44.46	54.00	9.54	Average
2483.678	28.37	5.83	39.87	50.03	44.36	54.00	9.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

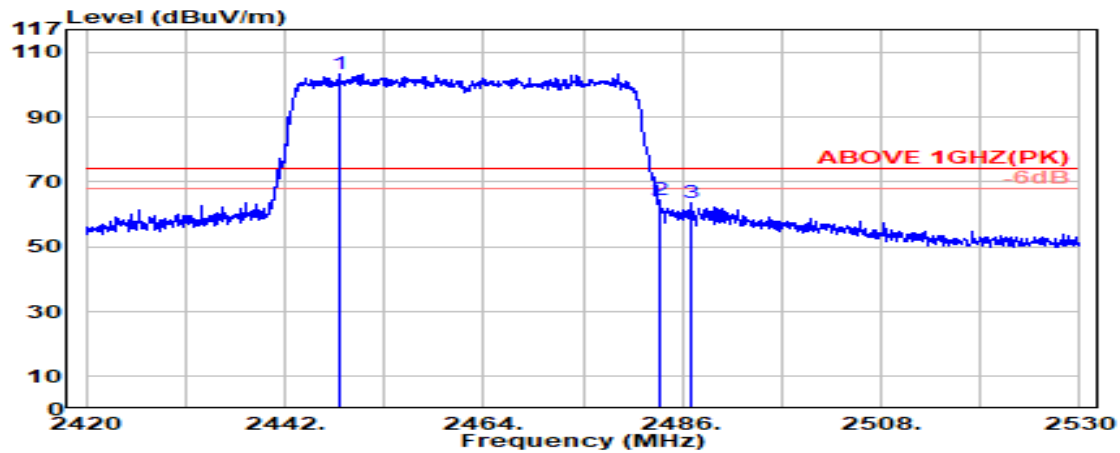

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2448.111	28.29	5.79	39.87	109.28	103.49	---	---	Peak
	2483.500	28.37	5.83	39.87	70.31	64.64	74.00	9.36	Peak
	2486.978	28.37	5.84	39.87	69.15	63.49	74.00	10.51	Peak

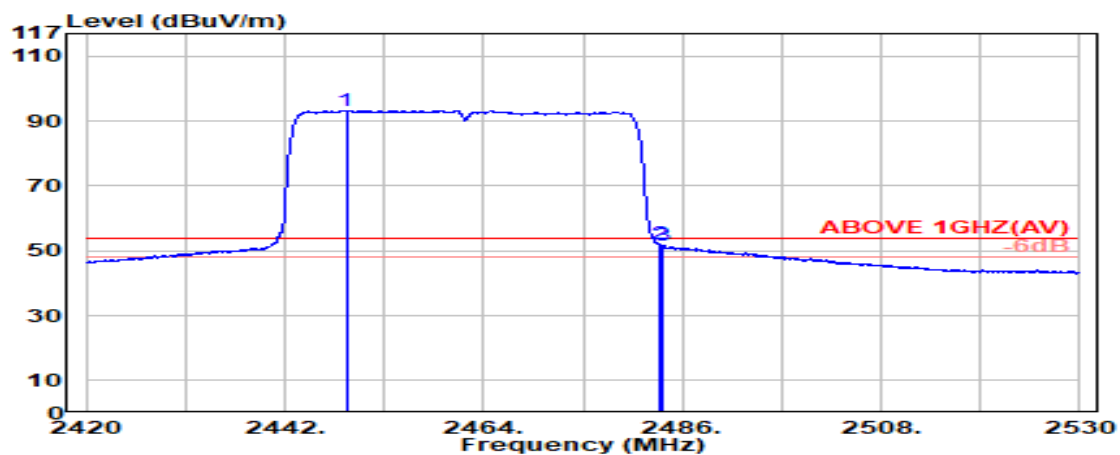


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2448.783	28.30	5.79	39.87	99.10	93.32	---	---	Average
	2483.500	28.37	5.83	39.87	57.81	52.14	54.00	1.86	Average
	2483.678	28.37	5.83	39.87	57.27	51.60	54.00	2.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

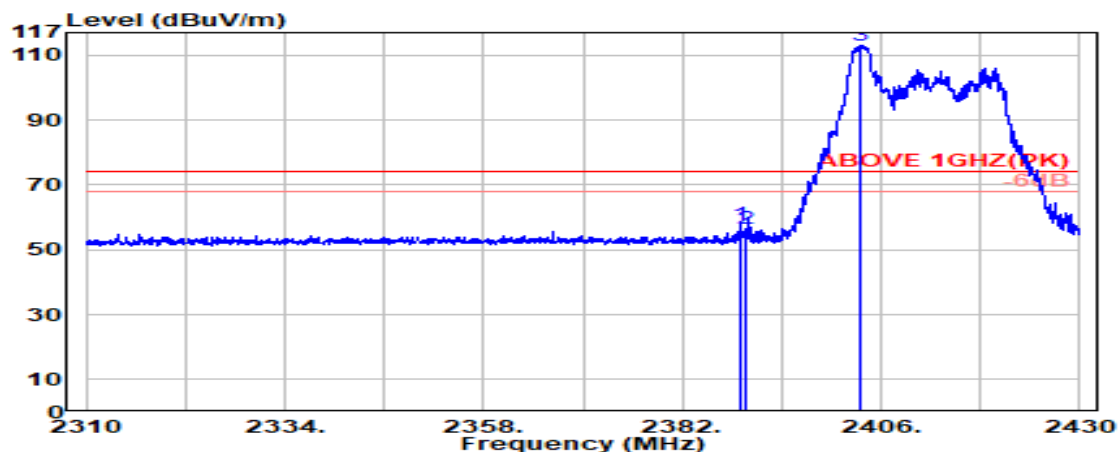

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	63.82	57.80	74.00	16.20	Peak
2389.800	28.14	5.72	39.88	62.54	56.52	74.00	17.48	Peak
@ 2403.500	28.11	5.74	39.88	119.15	113.12	---	---	Peak

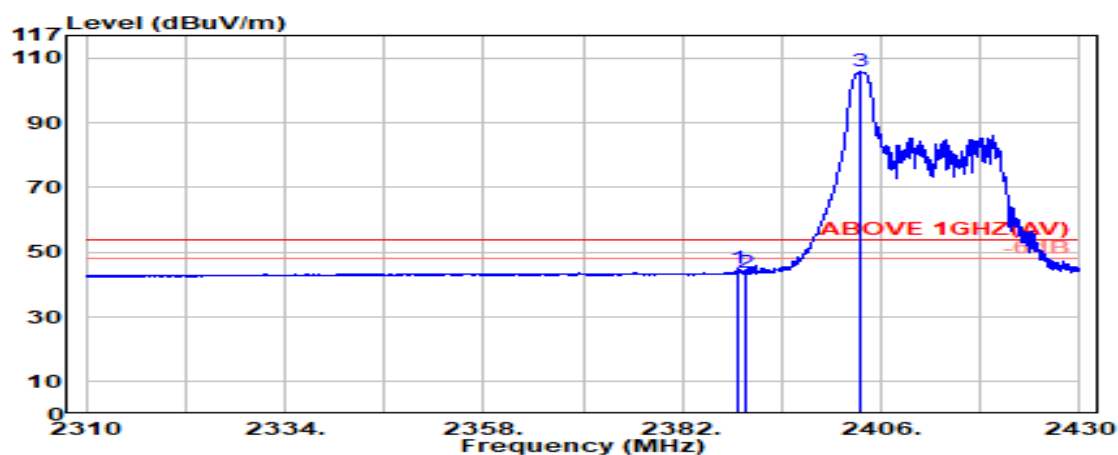

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	50.95	44.93	54.00	9.07	Average
2389.800	28.14	5.72	39.88	49.93	43.91	54.00	10.09	Average
@ 2403.450	28.11	5.74	39.88	111.87	105.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

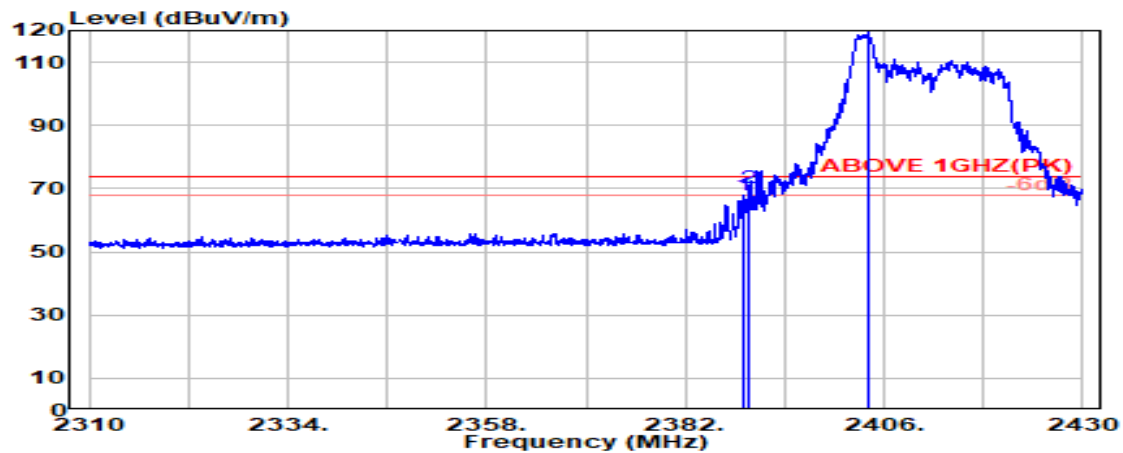

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	73.75	67.74	74.00	6.26	Peak
2389.800	28.14	5.72	39.88	76.29	70.27	74.00	3.73	Peak
@ 2404.150	28.12	5.74	39.88	125.70	119.67	---	---	Peak

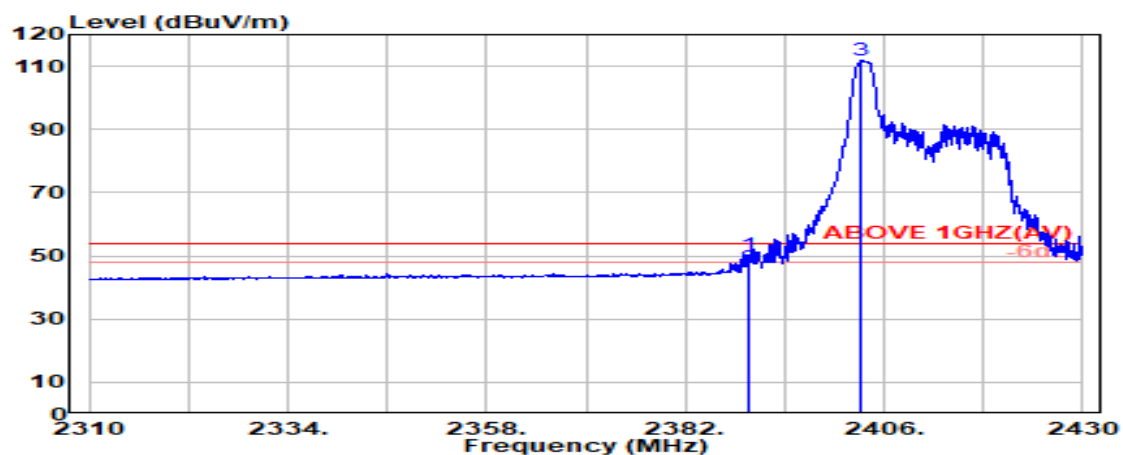

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	56.31	50.29	54.00	3.71	Average
2389.800	28.14	5.72	39.88	51.99	45.97	54.00	8.03	Average
@ 2403.250	28.11	5.74	39.88	117.75	111.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

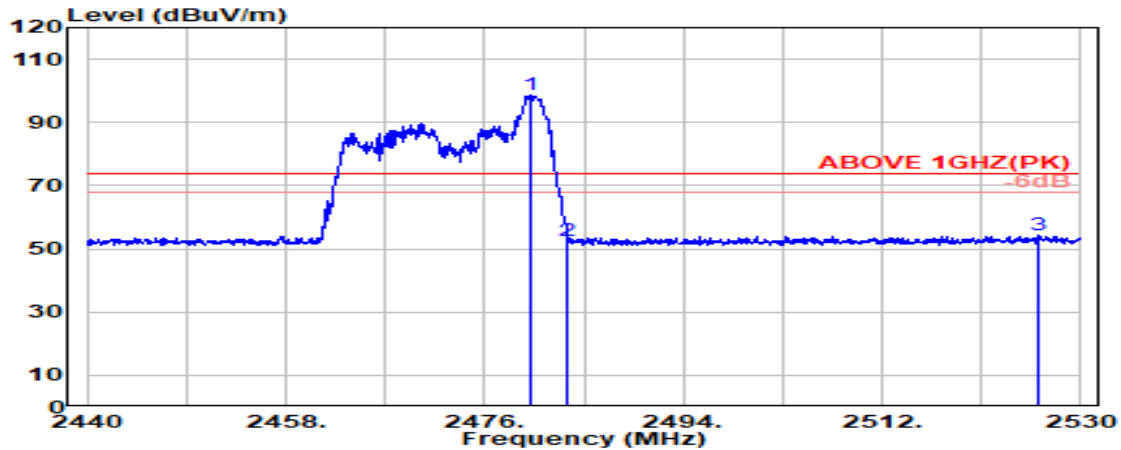

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.100	28.36	5.83	39.87	104.29	98.60	---	---	Peak
	2483.500	28.37	5.83	39.87	58.38	52.71	74.00	21.29	Peak
	2526.050	28.56	5.88	39.88	59.94	54.50	74.00	19.50	Peak

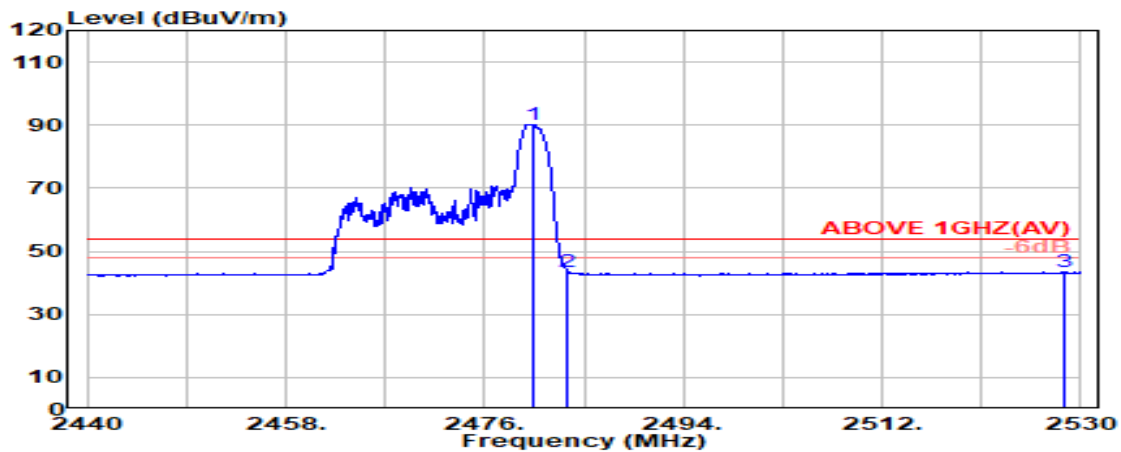

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	28.36	5.83	39.87	96.00	90.31	---	---	Average
	2483.500	28.37	5.83	39.87	49.22	43.55	54.00	10.45	Average
	2528.600	28.57	5.88	39.88	48.89	43.47	54.00	10.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

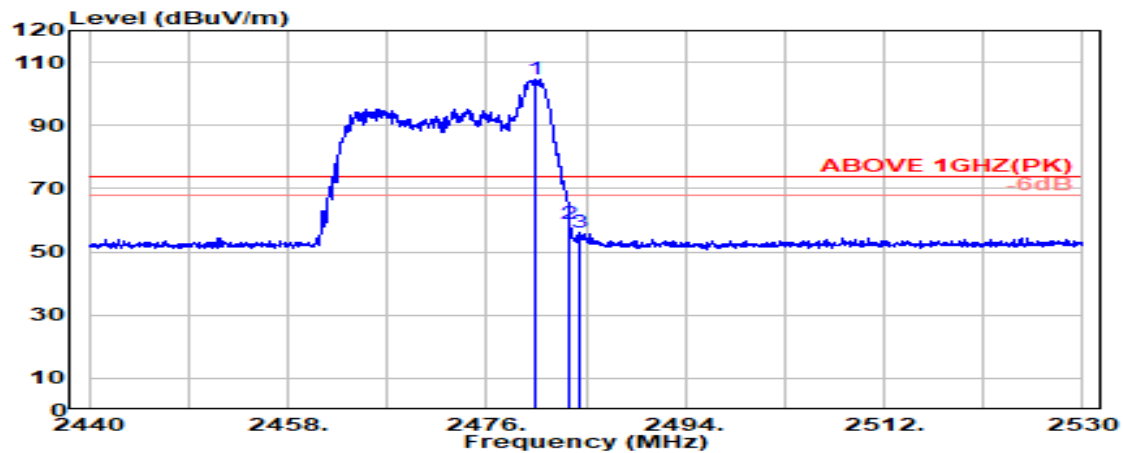

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	110.50	104.82	---	---	Peak
2483.500	28.37	5.83	39.87	64.52	58.85	74.00	15.15	Peak
2484.450	28.37	5.83	39.87	62.03	56.36	74.00	17.64	Peak

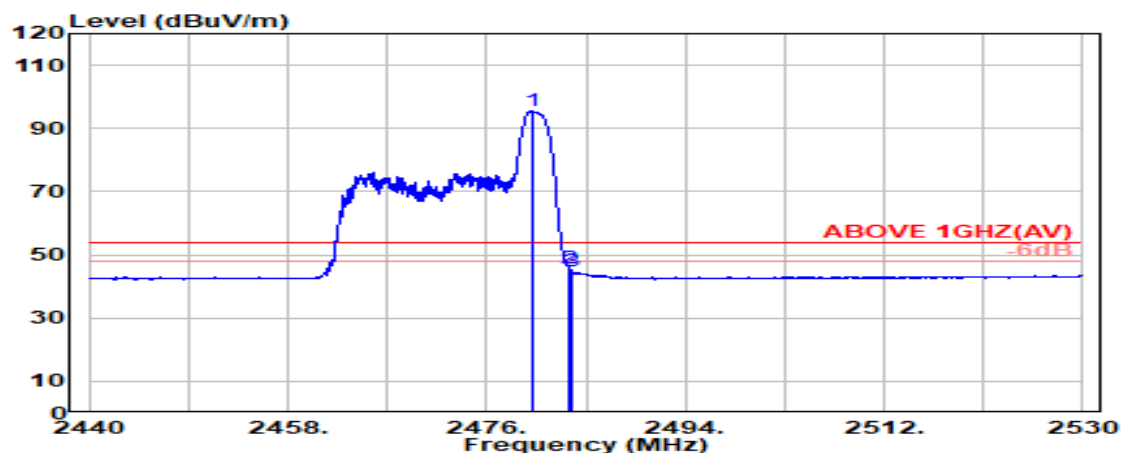

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.83	39.87	101.32	95.63	---	---	Average
2483.500	28.37	5.83	39.87	51.31	45.64	54.00	8.36	Average
2483.700	28.37	5.83	39.87	50.42	44.74	54.00	9.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

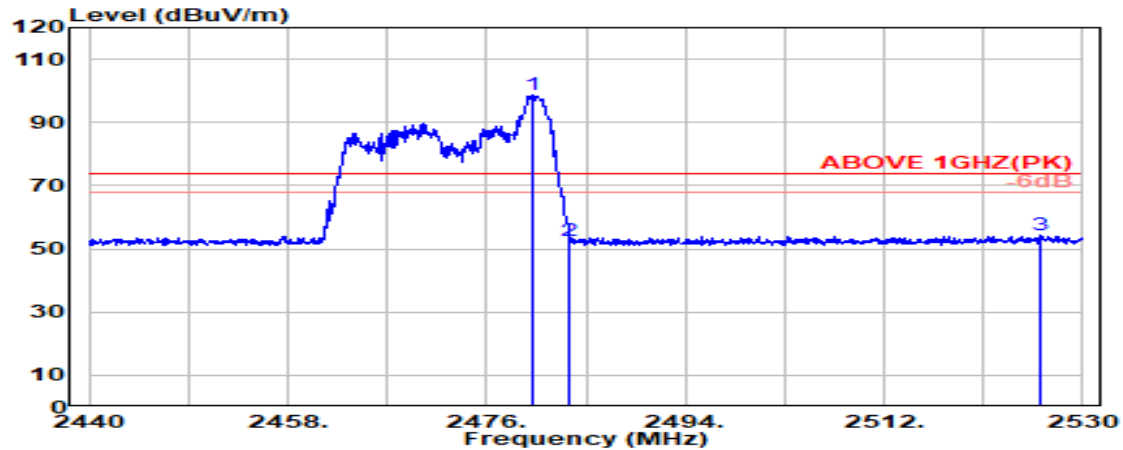

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	63.55	57.54	74.00	16.46	Peak
2389.800	28.14	5.72	39.88	59.06	53.04	74.00	20.96	Peak
@ 2405.650	28.12	5.74	39.88	118.10	112.09	---	---	Peak

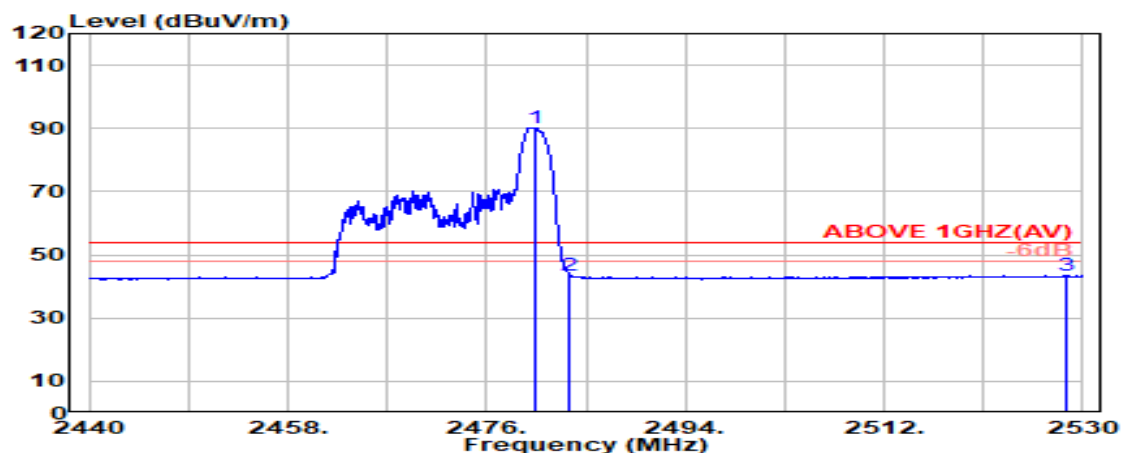

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	51.31	45.30	54.00	8.70	Average
2389.800	28.14	5.72	39.88	50.66	44.65	54.00	9.35	Average
@ 2404.150	28.12	5.74	39.88	109.66	103.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

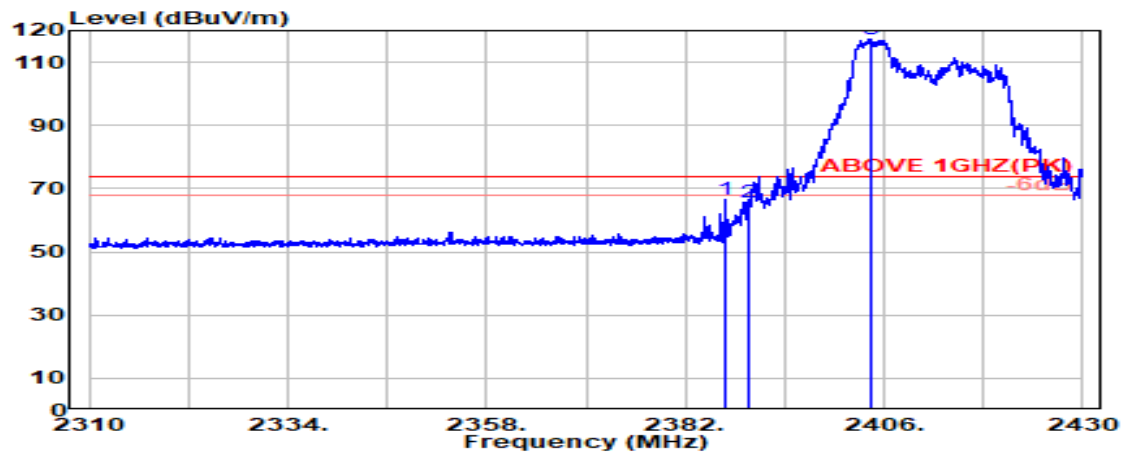

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.850	28.15	5.72	39.88	72.57	66.56	74.00	7.44	Peak
2389.800	28.14	5.72	39.88	71.62	65.61	74.00	8.39	Peak
@ 2404.500	28.12	5.74	39.88	123.23	117.21	---	---	Peak

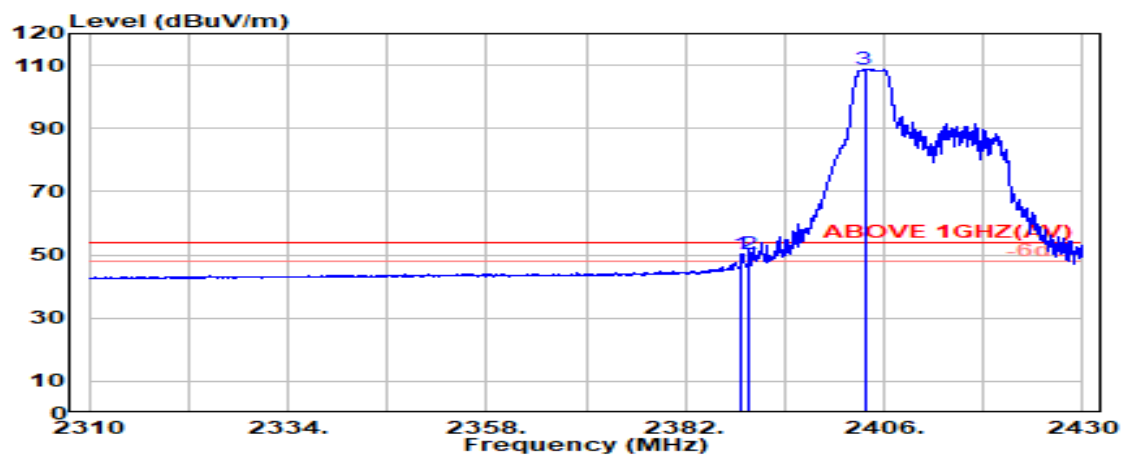

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	56.40	50.39	54.00	3.61	Average
2389.800	28.14	5.72	39.88	56.18	50.16	54.00	3.84	Average
@ 2403.650	28.11	5.74	39.88	114.93	108.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

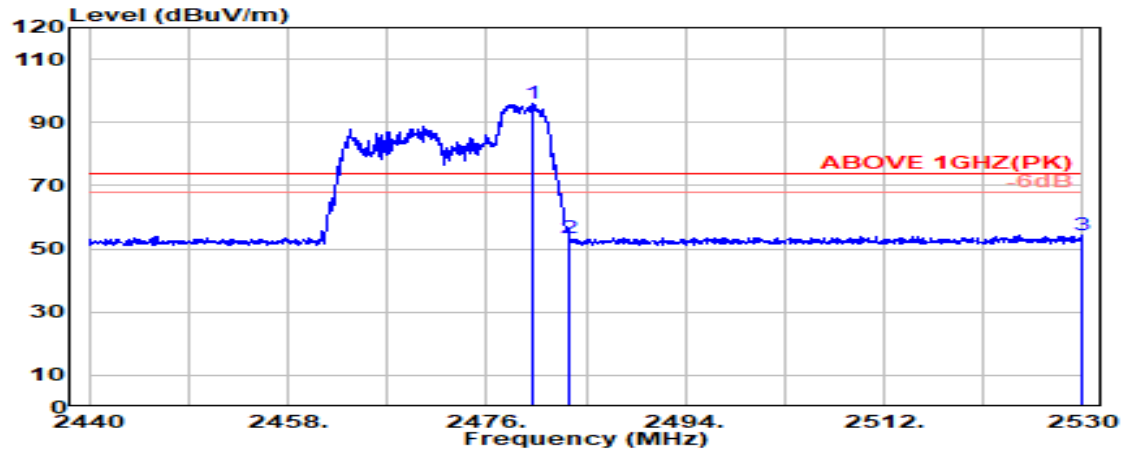

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.250	28.36	5.83	39.87	101.85	96.16	---	---	Peak
	2483.500	28.37	5.83	39.87	59.23	53.55	74.00	20.45	Peak
	2529.950	28.58	5.89	39.88	59.66	54.24	74.00	19.76	Peak

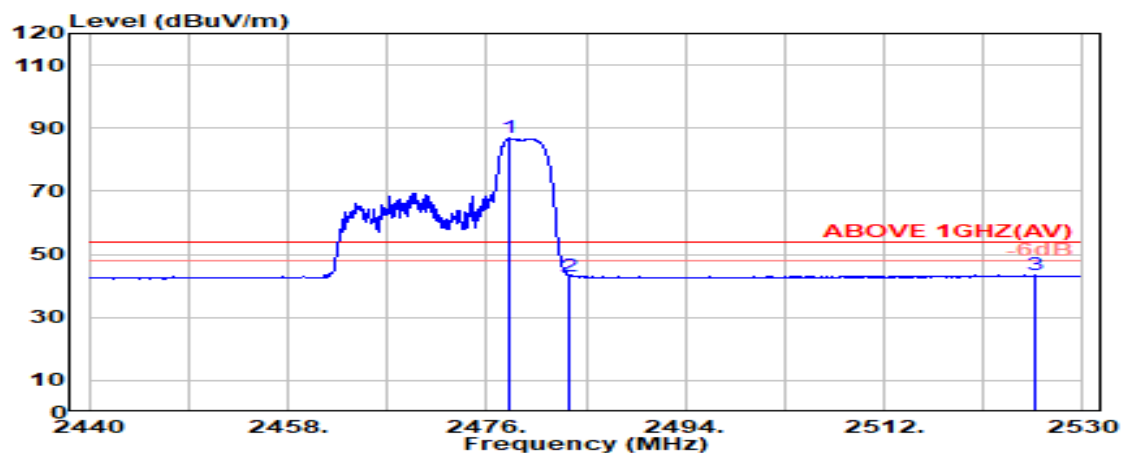

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2477.950	28.36	5.82	39.87	92.41	86.72	---	---	Average
	2483.500	28.37	5.83	39.87	48.91	43.24	54.00	10.76	Average
	2525.750	28.56	5.88	39.88	48.80	43.36	54.00	10.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

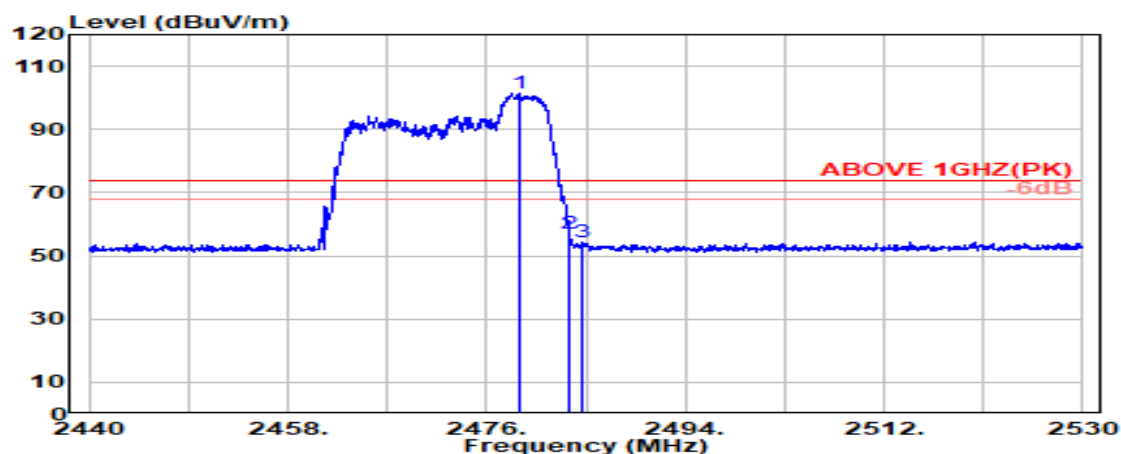

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.36	5.83	39.87	106.94	101.25	---	---	Peak
2483.500	28.37	5.83	39.87	62.54	56.87	74.00	17.13	Peak
2484.750	28.37	5.83	39.87	60.01	54.34	74.00	19.66	Peak

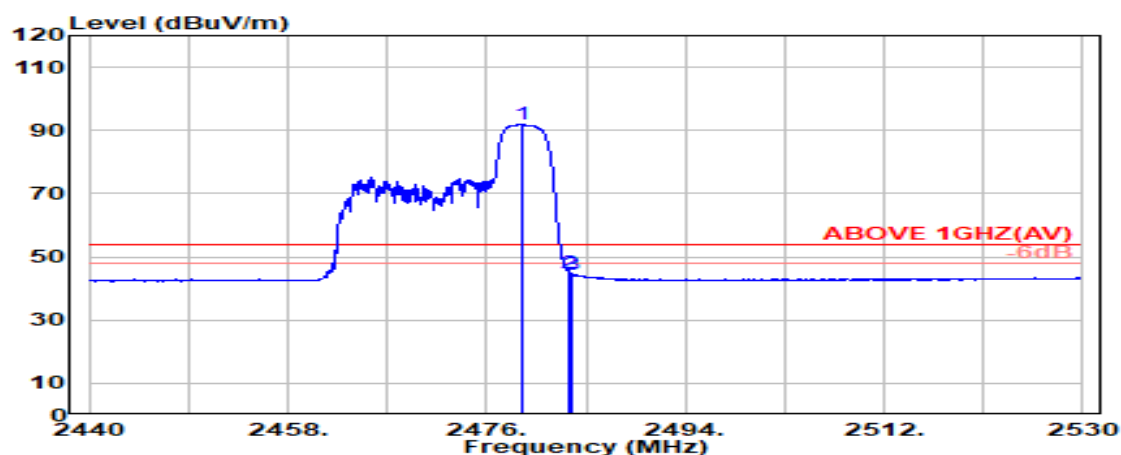

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.36	5.83	39.87	97.74	92.05	---	---	Average
2483.500	28.37	5.83	39.87	50.66	44.99	54.00	9.01	Average
2483.800	28.37	5.83	39.87	50.25	44.58	54.00	9.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

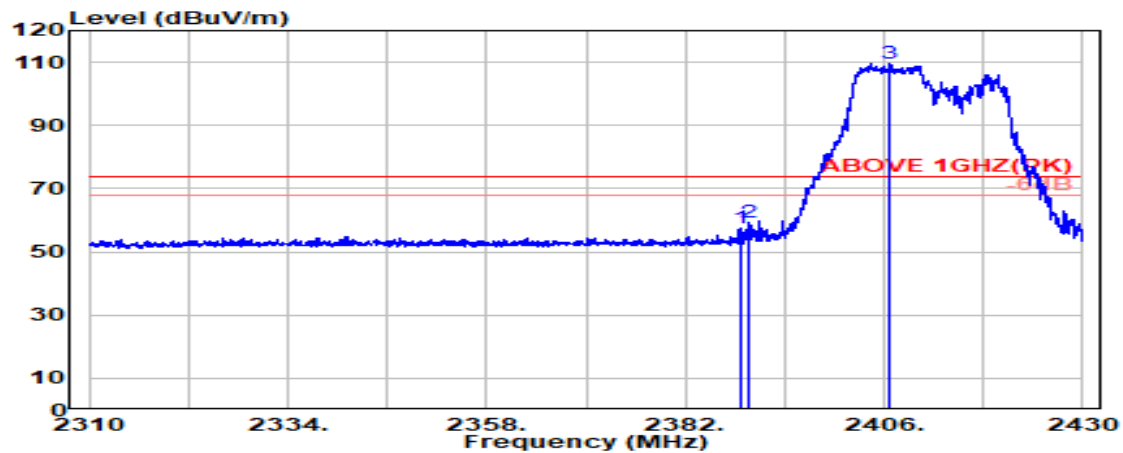

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.800	28.14	5.72	39.88	63.54	57.52	74.00	16.48	Peak
2389.800	28.14	5.72	39.88	65.30	59.29	74.00	14.71	Peak
@ 2406.750	28.13	5.74	39.88	115.75	109.74	---	---	Peak

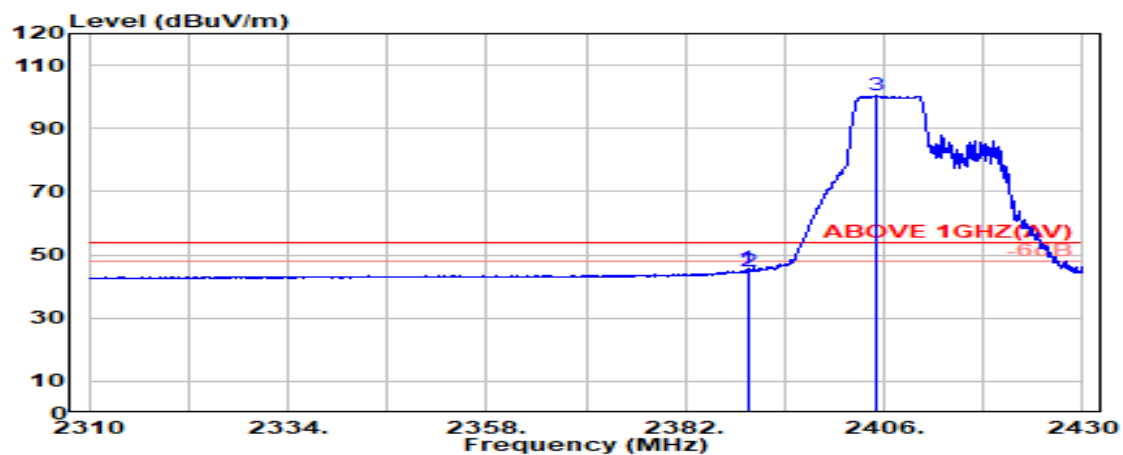

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	51.74	45.73	54.00	8.27	Average
2389.800	28.14	5.72	39.88	50.96	44.95	54.00	9.05	Average
@ 2404.950	28.12	5.74	39.88	106.66	100.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

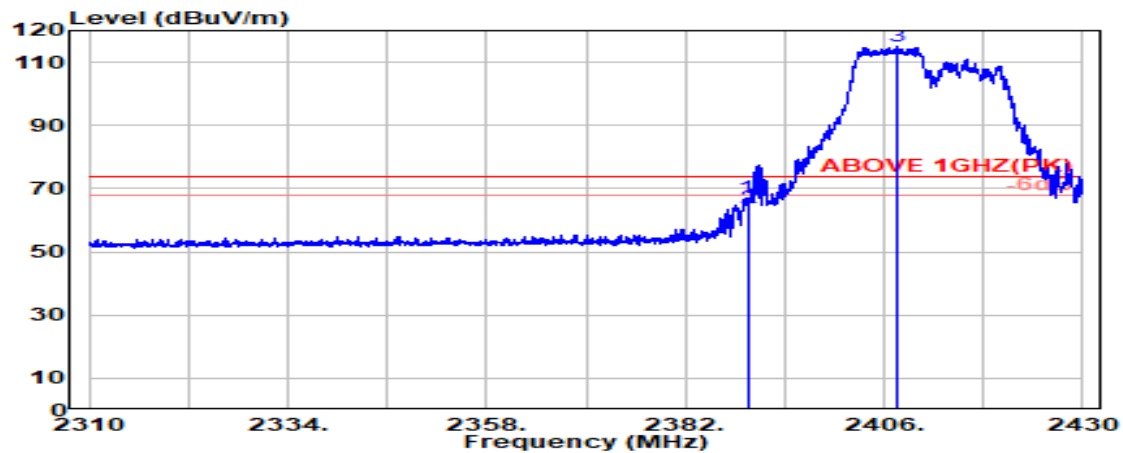

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	73.23	67.21	74.00	6.79	Peak
2389.800	28.14	5.72	39.88	69.78	63.76	74.00	10.24	Peak
@ 2407.550	28.13	5.74	39.88	121.05	115.04	---	---	Peak

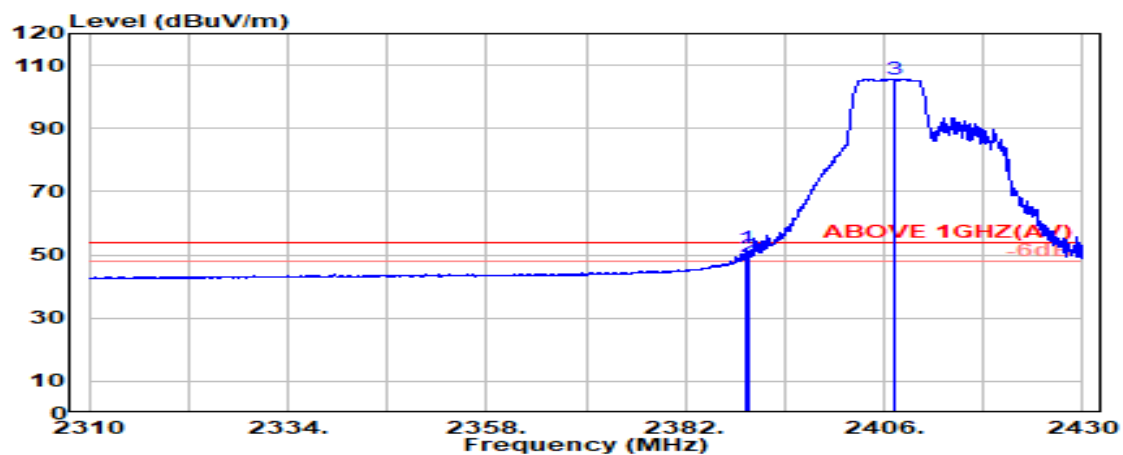

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	58.25	52.23	54.00	1.77	Average
2389.800	28.14	5.72	39.88	55.48	49.46	54.00	4.54	Average
@ 2407.150	28.13	5.74	39.88	111.62	105.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	106/54		

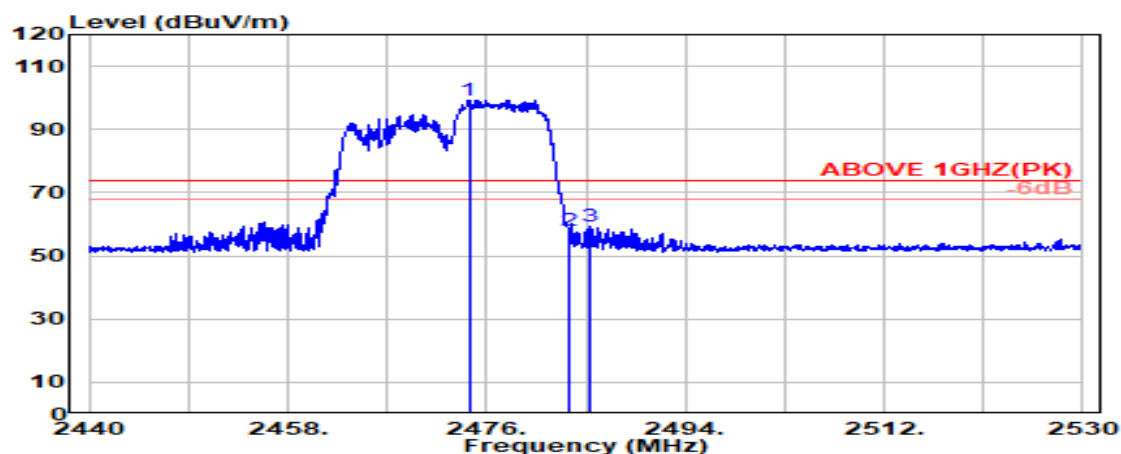

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.400	28.35	5.82	39.87	105.08	99.37	---	---	Peak
2483.500	28.37	5.83	39.87	63.74	58.07	74.00	15.93	Peak
2485.400	28.37	5.83	39.87	65.01	59.34	74.00	14.66	Peak

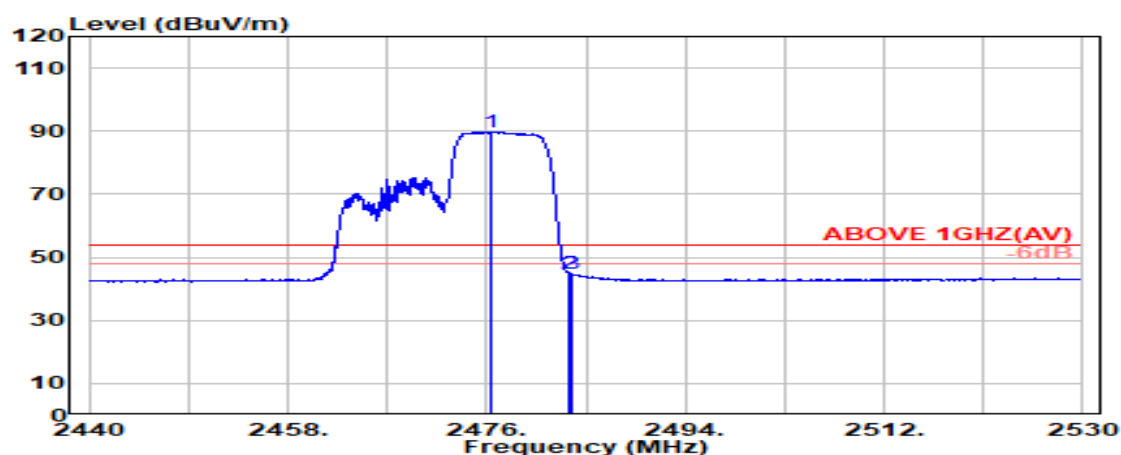

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.350	28.35	5.82	39.87	95.50	89.80	---	---	Average
2483.500	28.37	5.83	39.87	50.60	44.92	54.00	9.08	Average
2483.700	28.37	5.83	39.87	50.31	44.64	54.00	9.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	106/54		

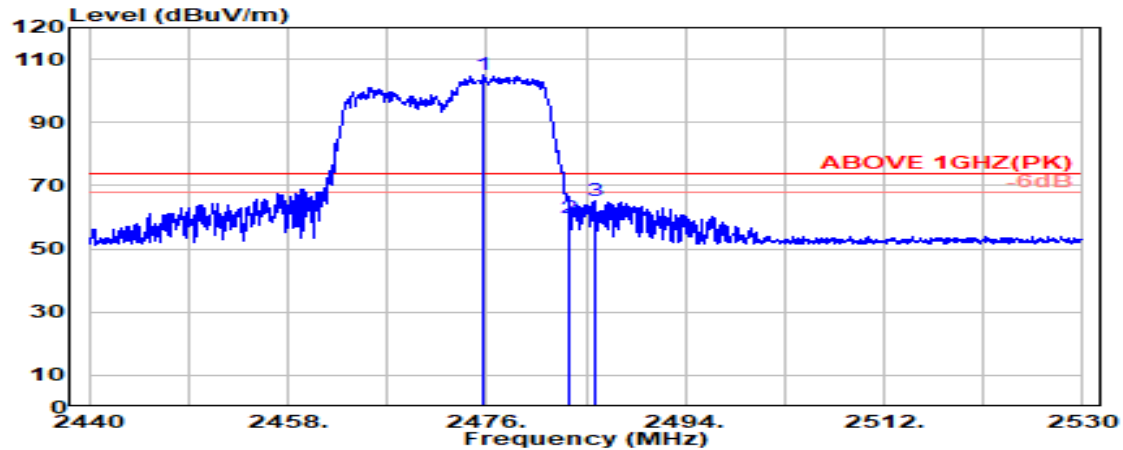

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2475.650	28.35	5.82	39.87	110.59	104.89	---	---	Peak
	2483.500	28.37	5.83	39.87	65.65	59.98	74.00	14.02	Peak
	2485.750	28.37	5.83	39.87	70.83	65.16	74.00	8.84	Peak

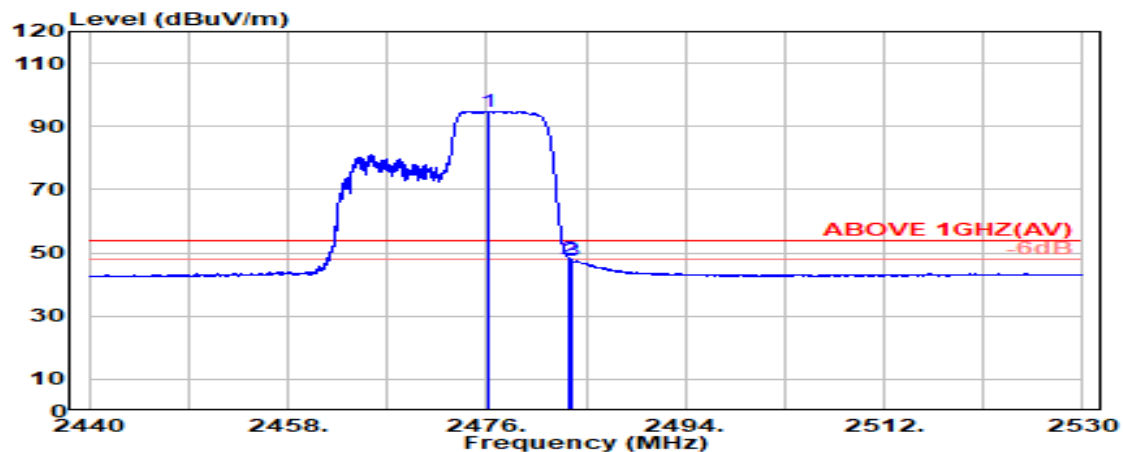

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.200	28.35	5.82	39.87	100.44	94.74	---	---	Average
	2483.500	28.37	5.83	39.87	53.80	48.12	54.00	5.88	Average
	2483.700	28.37	5.83	39.87	53.44	47.76	54.00	6.24	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

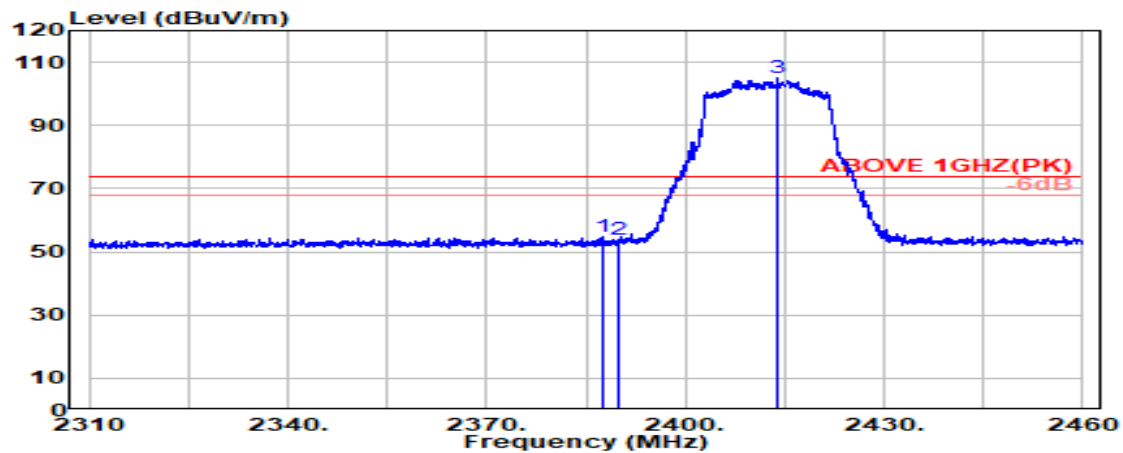

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	28.15	5.72	39.88	60.73	54.72	74.00	19.28	Peak
2389.800	28.14	5.72	39.88	59.86	53.85	74.00	20.15	Peak
@ 2413.800	28.16	5.75	39.88	111.10	105.13	---	---	Peak

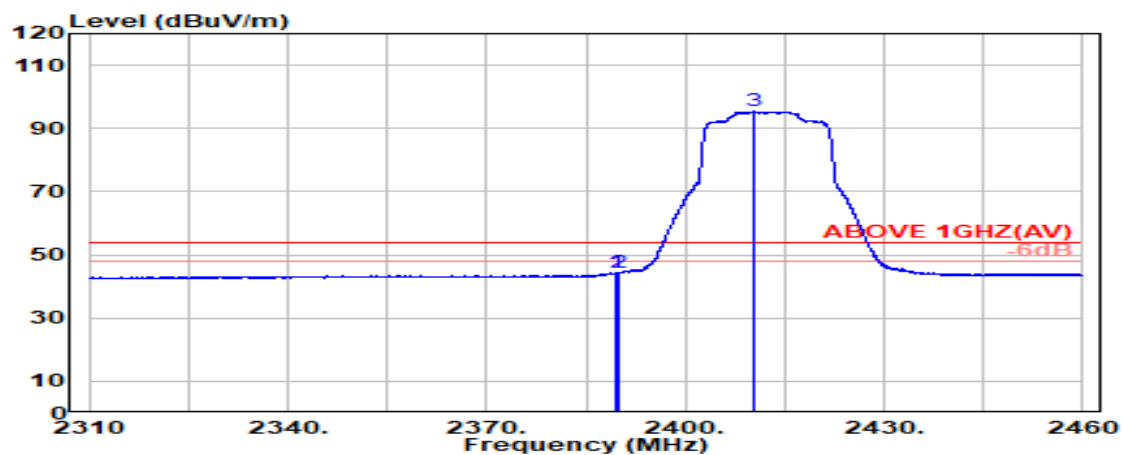

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	50.23	44.21	54.00	9.79	Average
2389.800	28.14	5.72	39.88	50.45	44.43	54.00	9.57	Average
@ 2410.450	28.14	5.75	39.88	101.31	95.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

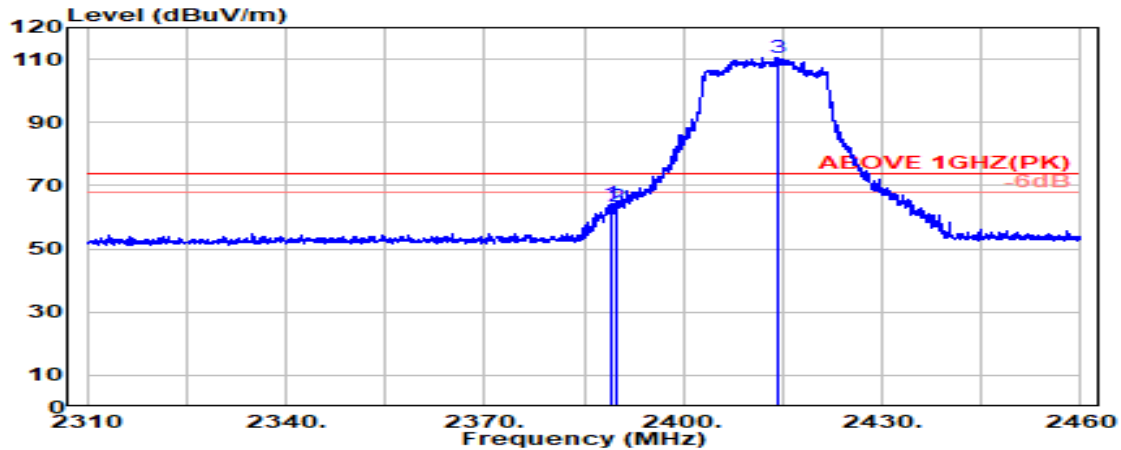

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	70.31	64.30	74.00	9.70	Peak
2389.800	28.14	5.72	39.88	69.29	63.27	74.00	10.73	Peak
@ 2414.250	28.16	5.75	39.88	116.65	110.68	---	---	Peak

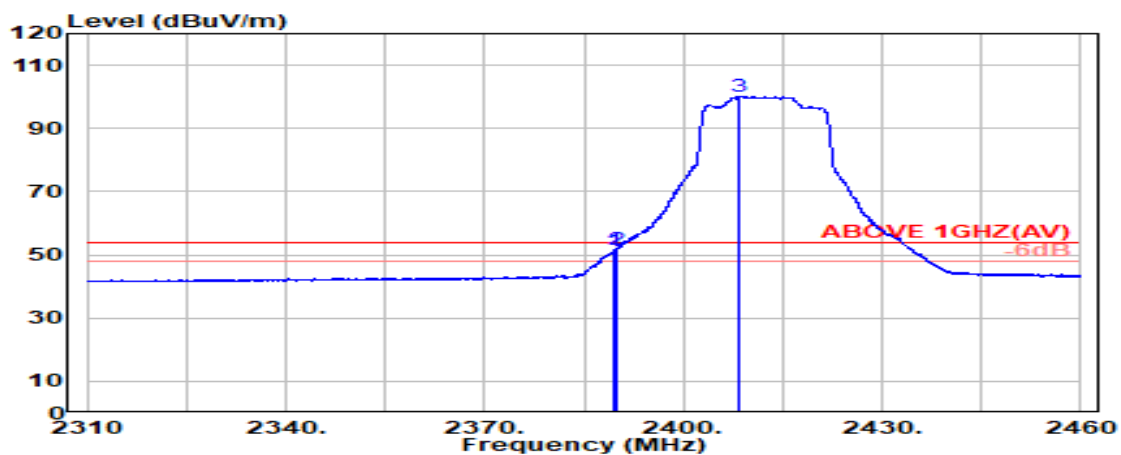

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	57.31	51.30	54.00	2.70	Average
2389.800	28.14	5.72	39.88	57.77	51.75	54.00	2.25	Average
@ 2408.450	28.13	5.74	39.88	106.20	100.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

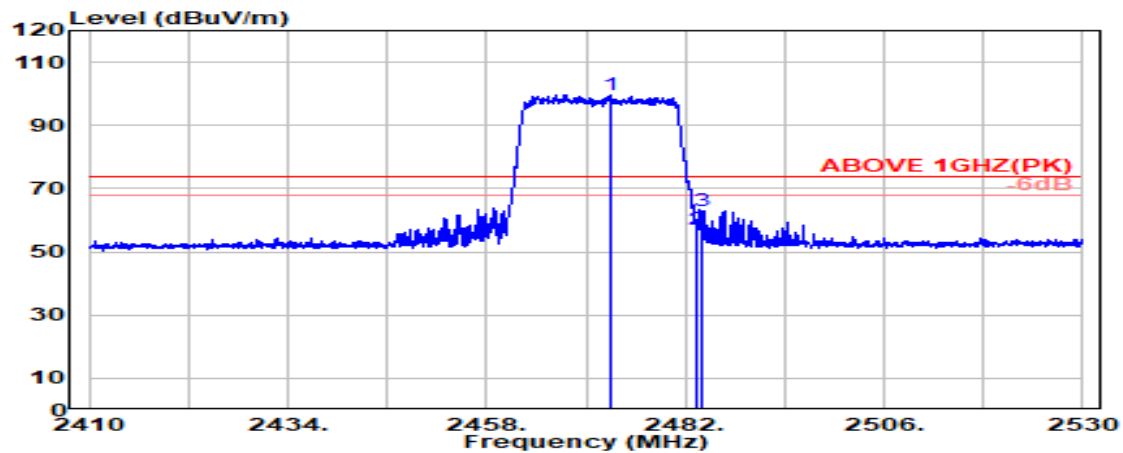

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.850	28.35	5.82	39.87	105.44	99.74	---	---	Peak
2483.500	28.37	5.83	39.87	62.93	57.26	74.00	16.74	Peak
2484.000	28.37	5.83	39.87	68.75	63.08	74.00	10.92	Peak

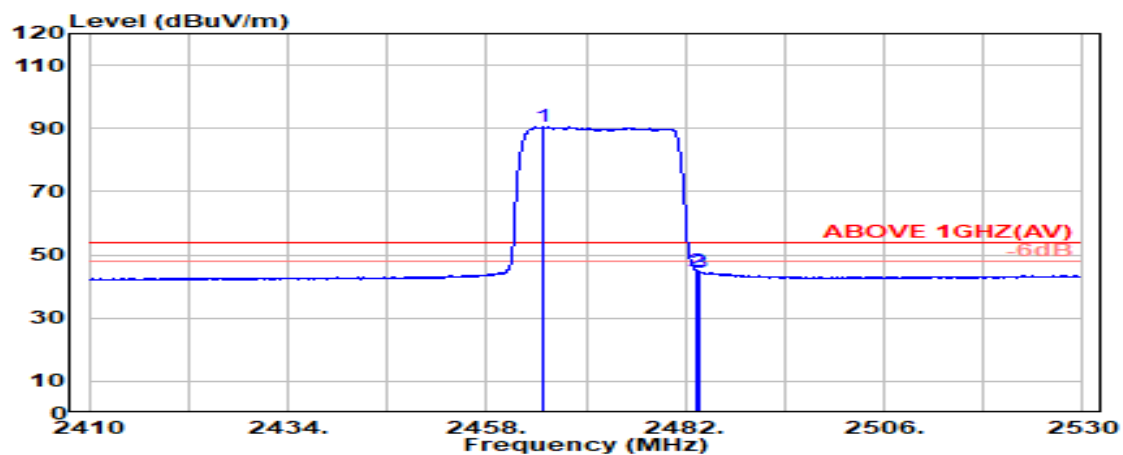

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.750	28.33	5.81	39.87	96.13	90.39	---	---	Average
2483.500	28.37	5.83	39.87	50.58	44.91	54.00	9.09	Average
2483.700	28.37	5.83	39.87	50.19	44.52	54.00	9.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

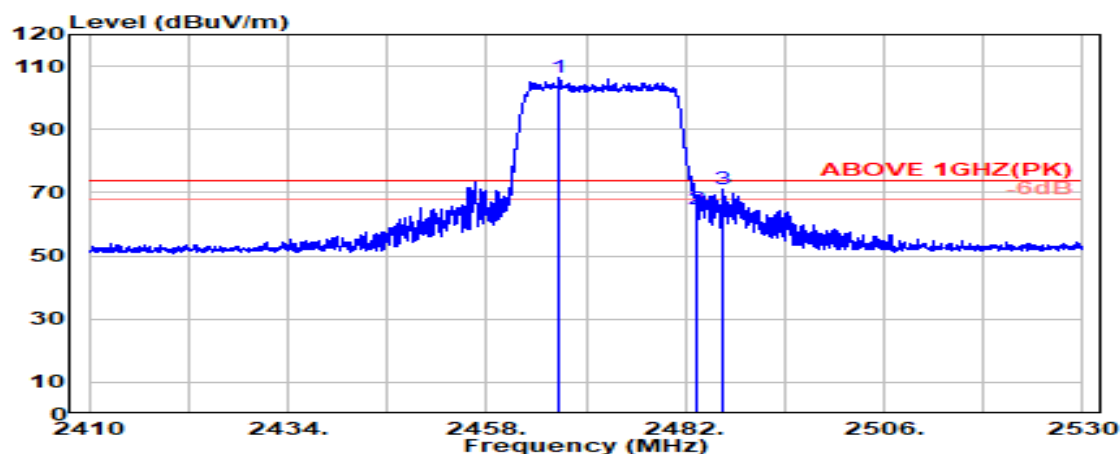

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.850	28.33	5.81	39.87	111.92	106.20	---	---	Peak
2483.500	28.37	5.83	39.87	70.62	64.94	74.00	9.06	Peak
2486.550	28.37	5.83	39.87	76.61	70.94	74.00	3.06	Peak

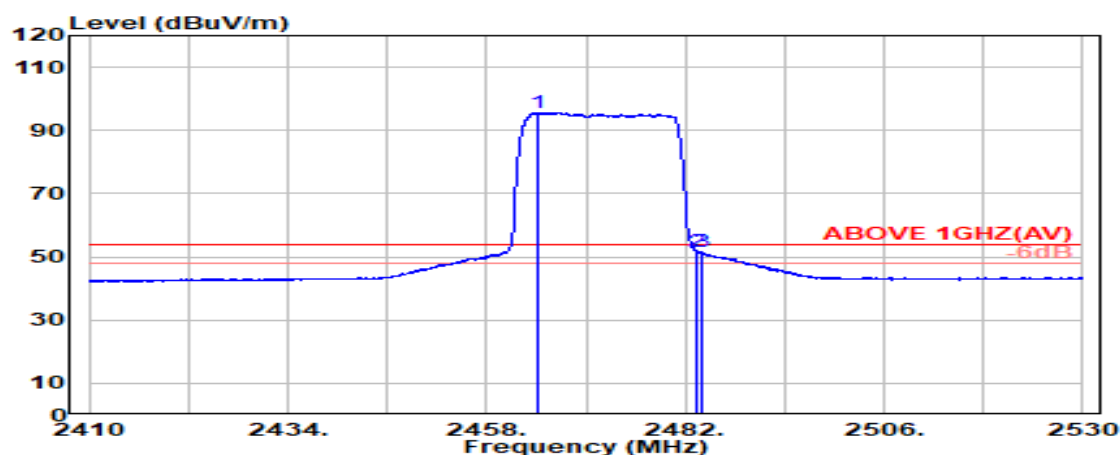

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.33	5.81	39.87	101.49	95.75	---	---	Average
2483.500	28.37	5.83	39.87	57.18	51.51	54.00	2.49	Average
2483.850	28.37	5.83	39.87	57.09	51.42	54.00	2.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

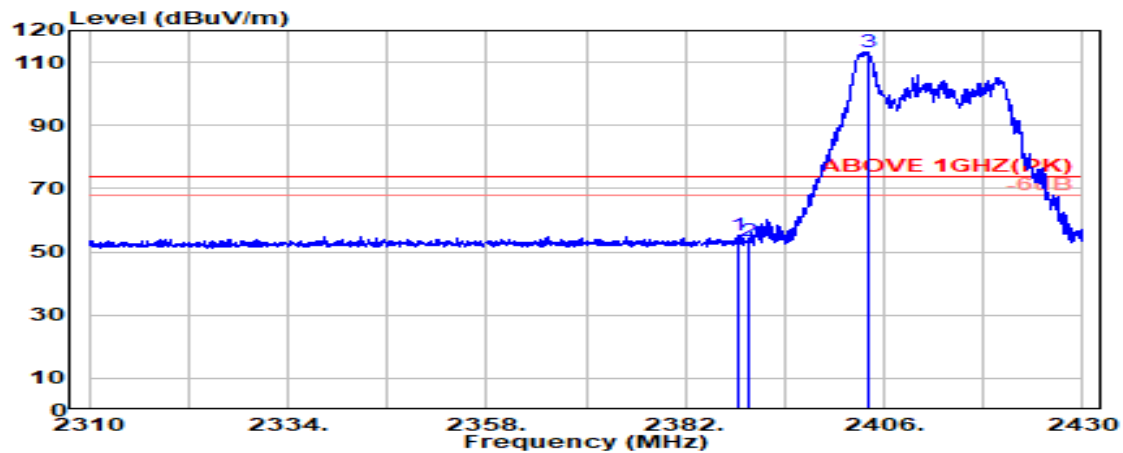

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.350	28.15	5.72	39.88	61.18	55.17	74.00	18.83	Peak
2389.800	28.14	5.72	39.88	59.63	53.61	74.00	20.39	Peak
@ 2404.000	28.12	5.74	39.88	119.33	113.30	---	---	Peak

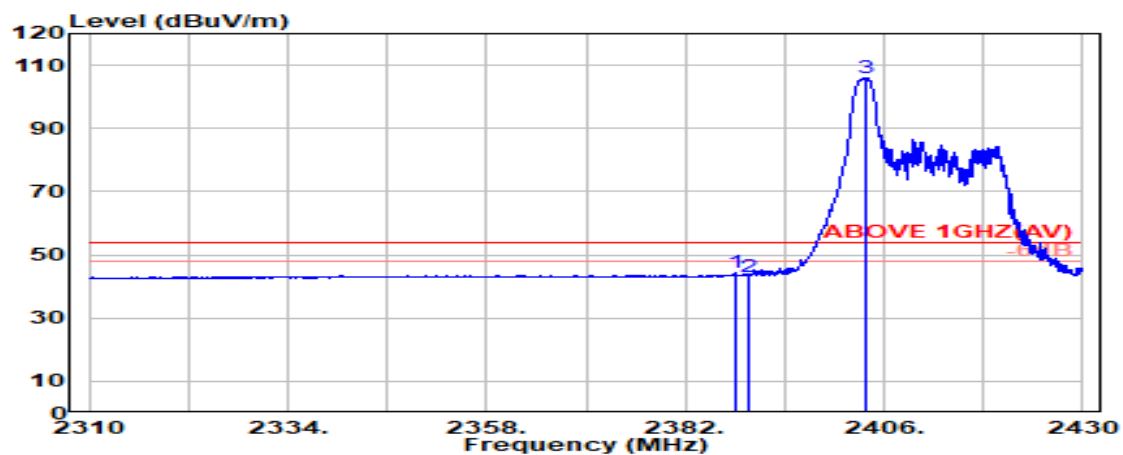

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.15	5.72	39.88	50.33	44.32	54.00	9.68	Average
2389.800	28.14	5.72	39.88	49.25	43.23	54.00	10.77	Average
@ 2403.750	28.12	5.74	39.88	112.13	106.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

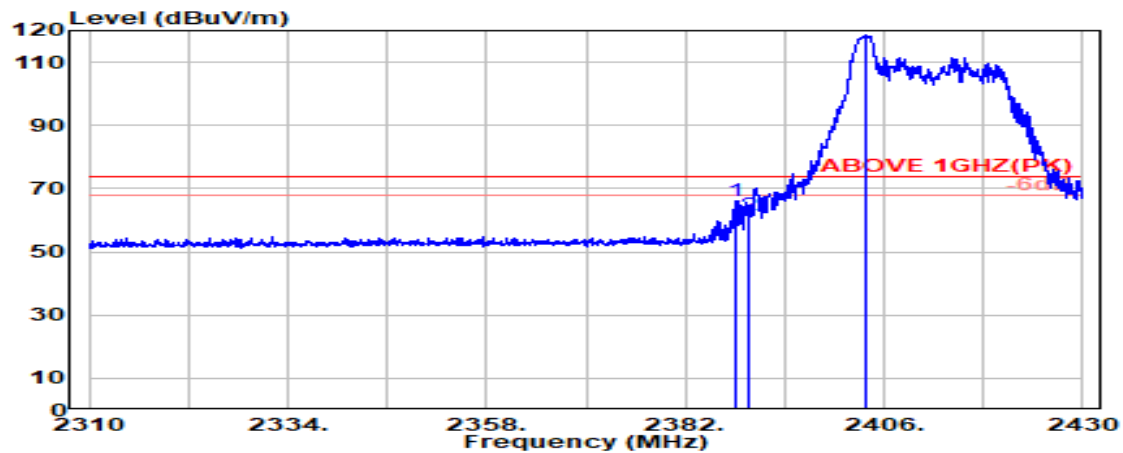

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.100	28.15	5.72	39.88	72.26	66.25	74.00	7.75	Peak
2389.800	28.14	5.72	39.88	67.40	61.38	74.00	12.62	Peak
@ 2403.950	28.12	5.74	39.88	124.65	118.62	---	---	Peak

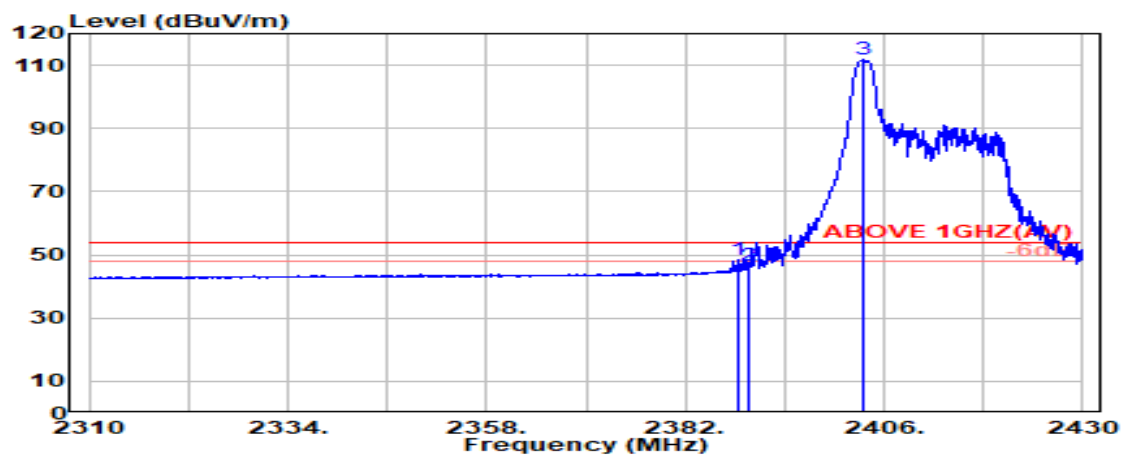

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.450	28.15	5.72	39.88	54.53	48.52	54.00	5.48	Average
2389.800	28.14	5.72	39.88	52.46	46.44	54.00	7.56	Average
@ 2403.400	28.11	5.74	39.88	117.71	111.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

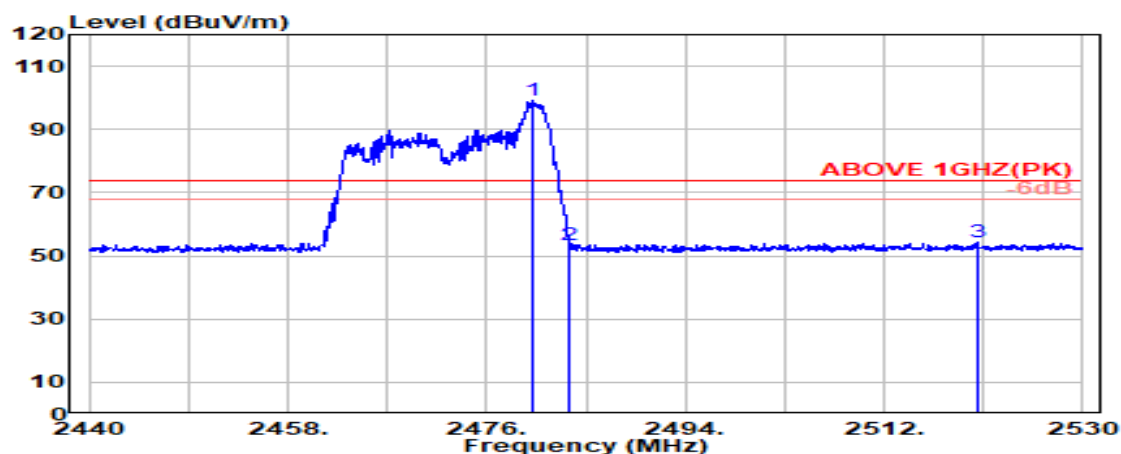

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.150	28.36	5.83	39.87	104.84	99.16	---	---	Peak
2483.500	28.37	5.83	39.87	59.15	53.47	74.00	20.53	Peak
2520.500	28.52	5.88	39.88	59.65	54.18	74.00	19.82	Peak

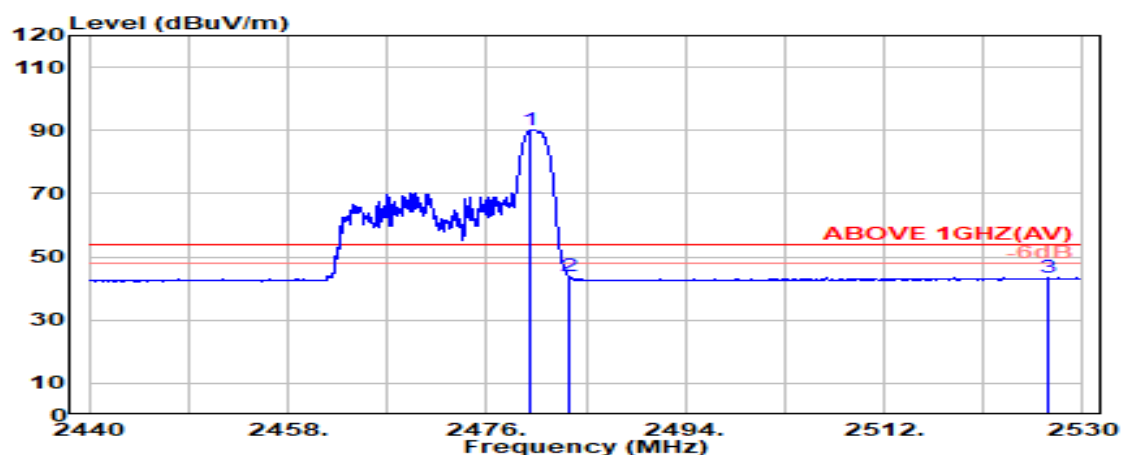

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.36	5.83	39.87	95.75	90.07	---	---	Average
2483.500	28.37	5.83	39.87	49.41	43.73	54.00	10.27	Average
2526.850	28.56	5.88	39.88	49.02	43.59	54.00	10.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

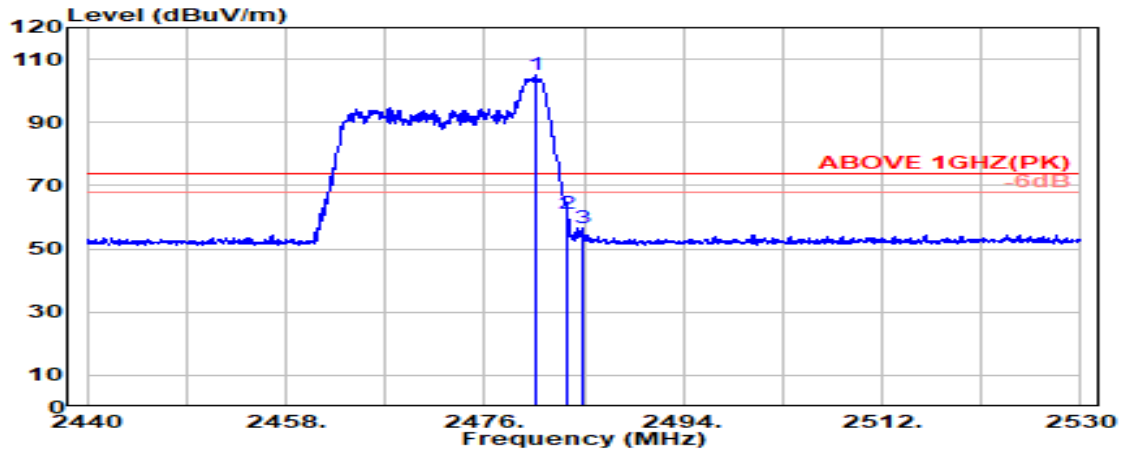

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	28.36	5.83	39.87	110.56	104.88	---	---	Peak
2483.500	28.37	5.83	39.87	66.69	61.02	74.00	12.98	Peak
2484.850	28.37	5.83	39.87	62.43	56.76	74.00	17.24	Peak

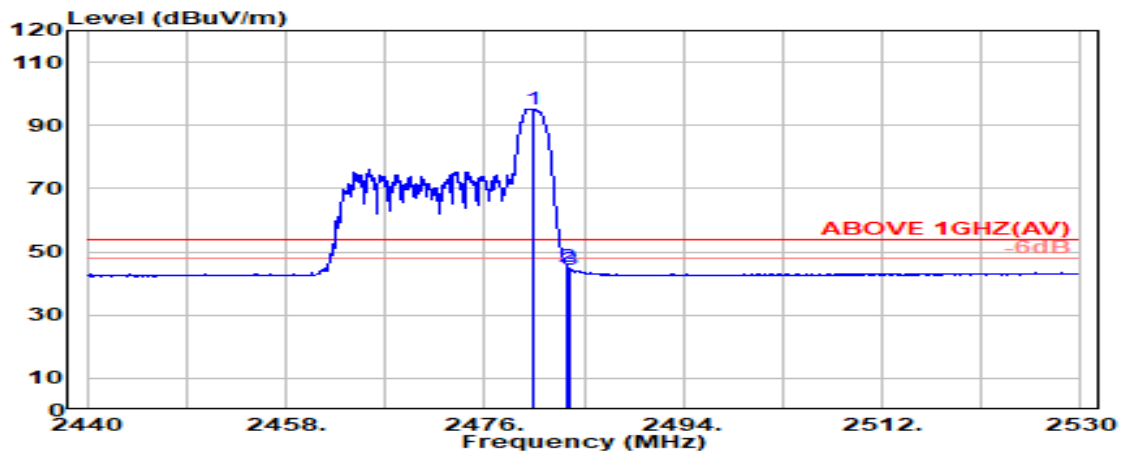

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	101.00	95.31	---	---	Average
2483.500	28.37	5.83	39.87	51.14	45.47	54.00	8.53	Average
2483.700	28.37	5.83	39.87	50.13	44.46	54.00	9.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

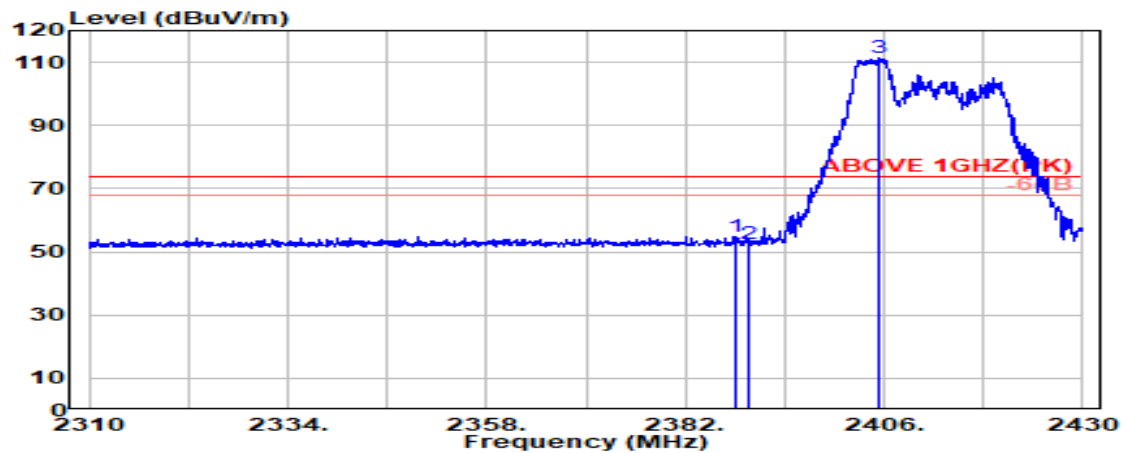

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.050	28.15	5.72	39.88	60.90	54.88	74.00	19.12	Peak
2389.800	28.14	5.72	39.88	58.69	52.67	74.00	21.33	Peak
@ 2405.500	28.12	5.74	39.88	117.63	111.61	---	---	Peak

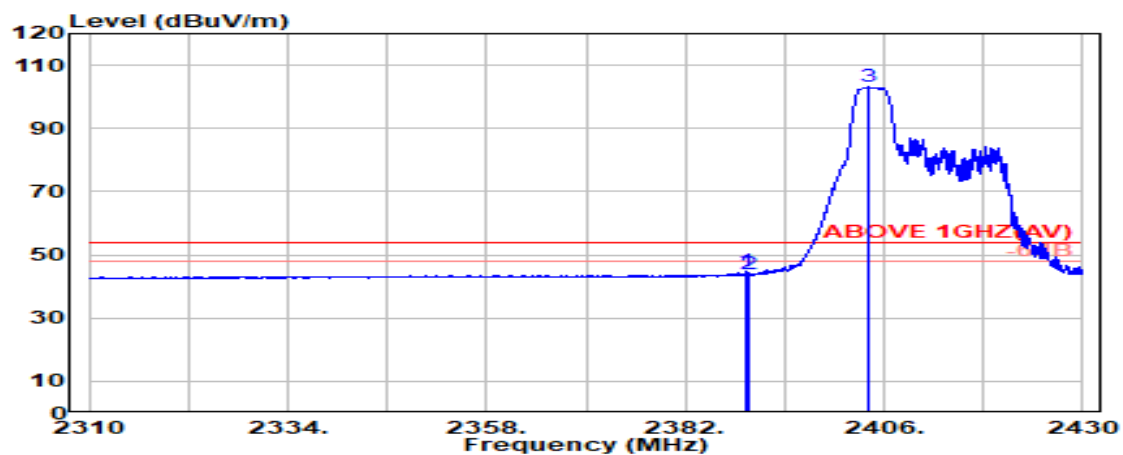

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	50.63	44.61	54.00	9.39	Average
2389.800	28.14	5.72	39.88	49.98	43.96	54.00	10.04	Average
@ 2404.250	28.12	5.74	39.88	109.16	103.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

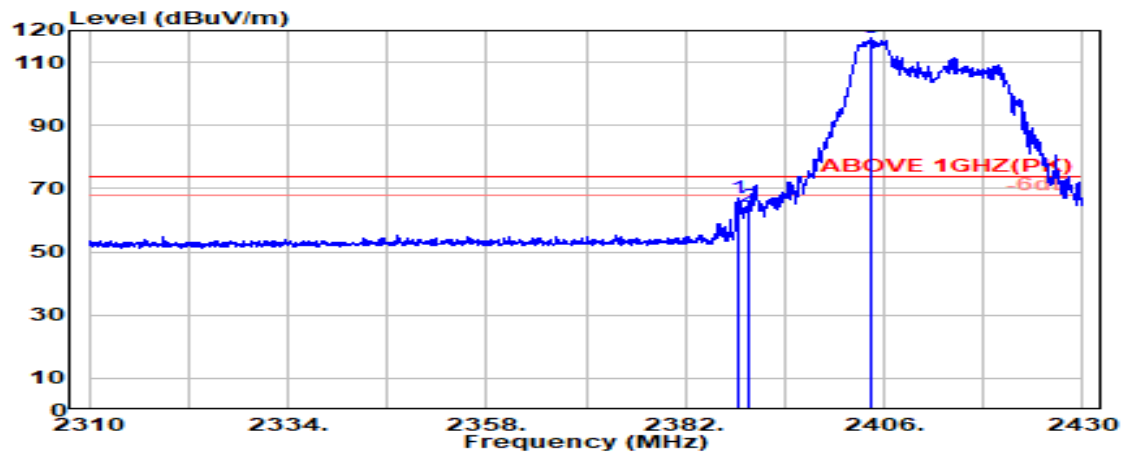

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.450	28.15	5.72	39.88	73.23	67.22	74.00	6.78	Peak
2389.800	28.14	5.72	39.88	70.33	64.31	74.00	9.69	Peak
@ 2404.400	28.12	5.74	39.88	123.76	117.74	---	---	Peak

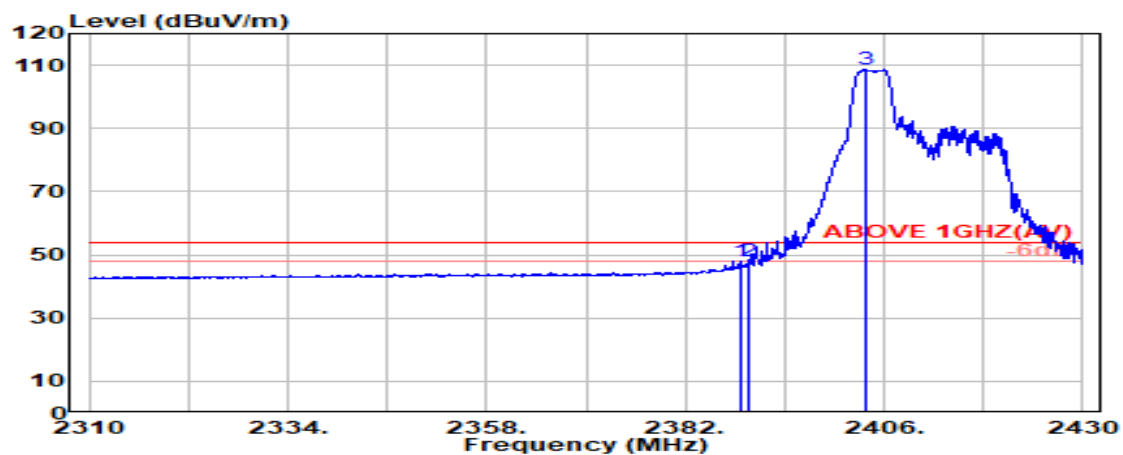

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.88	54.20	48.19	54.00	5.81	Average
2389.800	28.14	5.72	39.88	54.02	48.00	54.00	6.00	Average
@ 2403.900	28.12	5.74	39.88	114.64	108.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

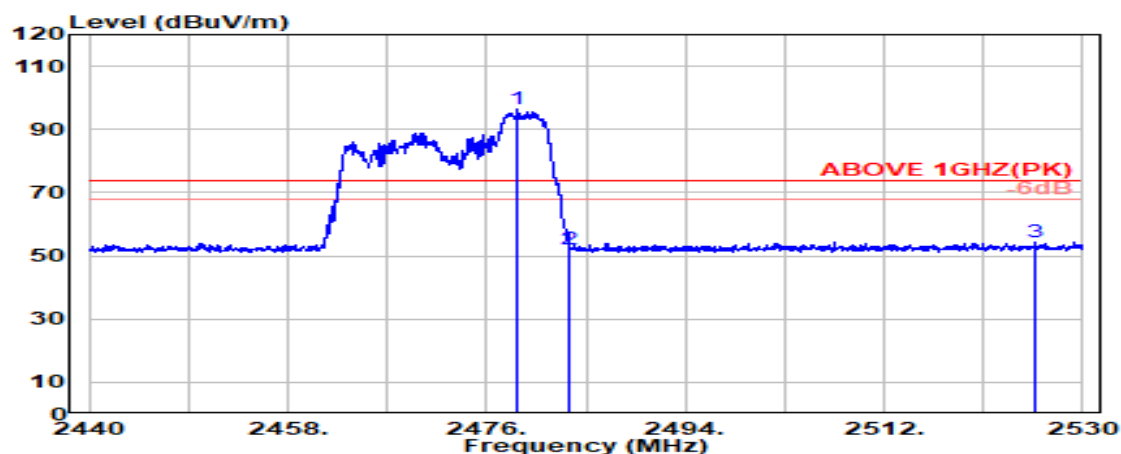

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.750	28.36	5.83	39.87	101.96	96.27	---	---	Peak
2483.500	28.37	5.83	39.87	57.90	52.23	74.00	21.77	Peak
2525.700	28.55	5.88	39.88	59.94	54.50	74.00	19.50	Peak

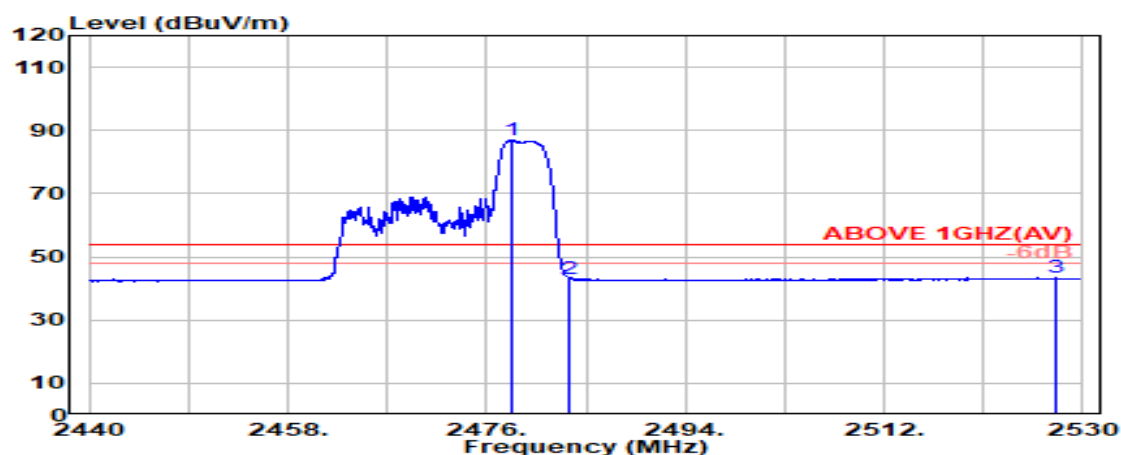

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	28.36	5.82	39.87	92.46	86.77	---	---	Average
2483.500	28.37	5.83	39.87	48.76	43.09	54.00	10.91	Average
2527.450	28.57	5.88	39.88	48.81	43.38	54.00	10.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

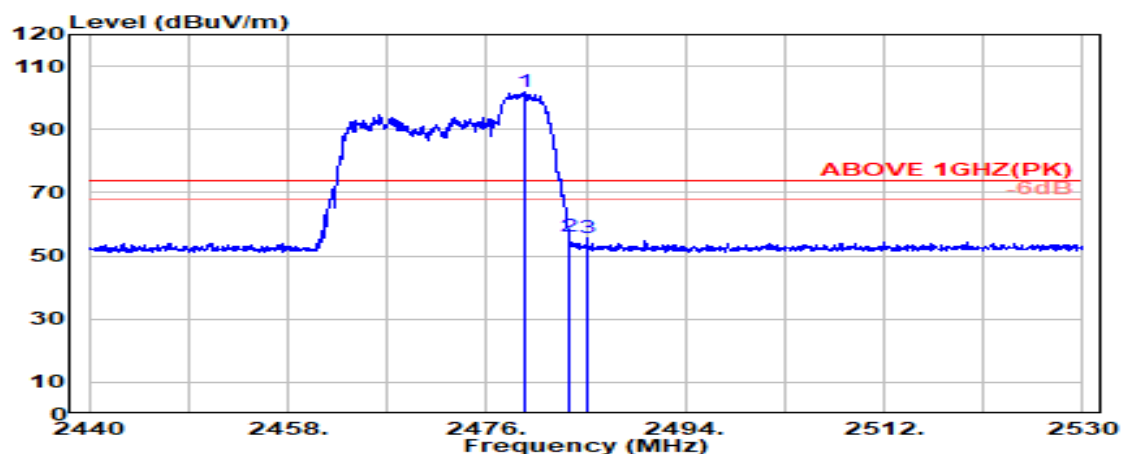

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.36	5.83	39.87	107.66	101.98	---	---	Peak
2483.500	28.37	5.83	39.87	61.92	56.25	74.00	17.75	Peak
2485.100	28.37	5.83	39.87	61.35	55.68	74.00	18.32	Peak

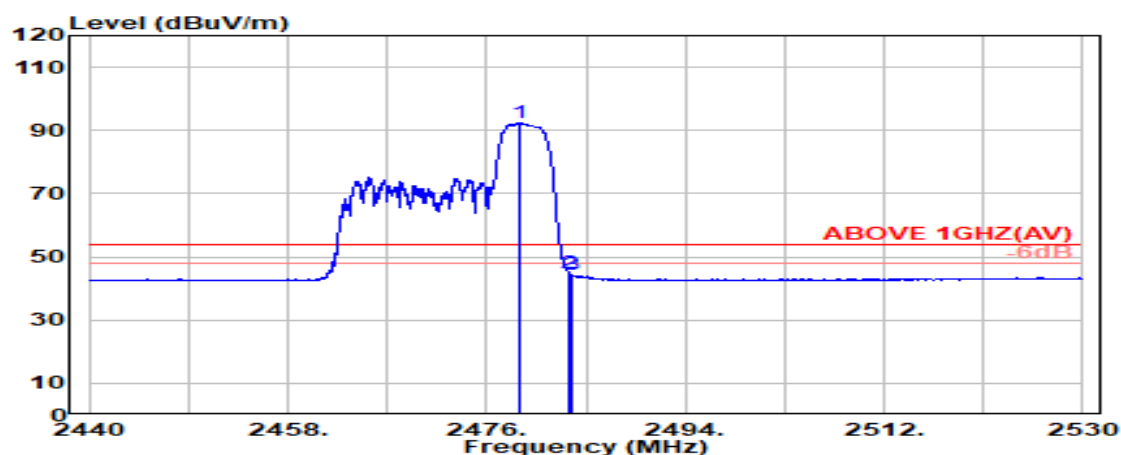

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.36	5.83	39.87	97.89	92.20	---	---	Average
2483.500	28.37	5.83	39.87	50.49	44.82	54.00	9.18	Average
2483.750	28.37	5.83	39.87	49.84	44.16	54.00	9.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

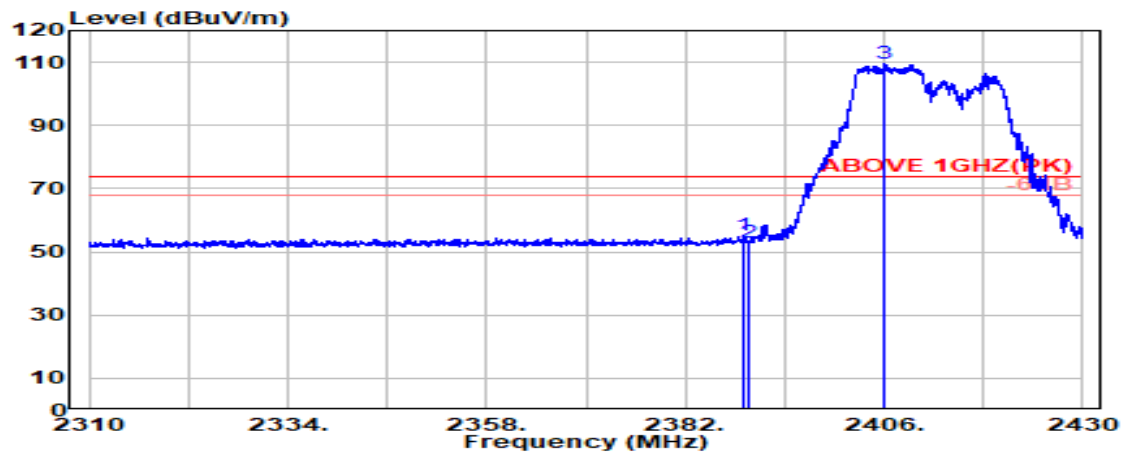

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.050	28.14	5.72	39.88	61.07	55.05	74.00	18.95	Peak
2389.800	28.14	5.72	39.88	58.99	52.98	74.00	21.02	Peak
@ 2406.050	28.12	5.74	39.88	115.45	109.44	---	---	Peak

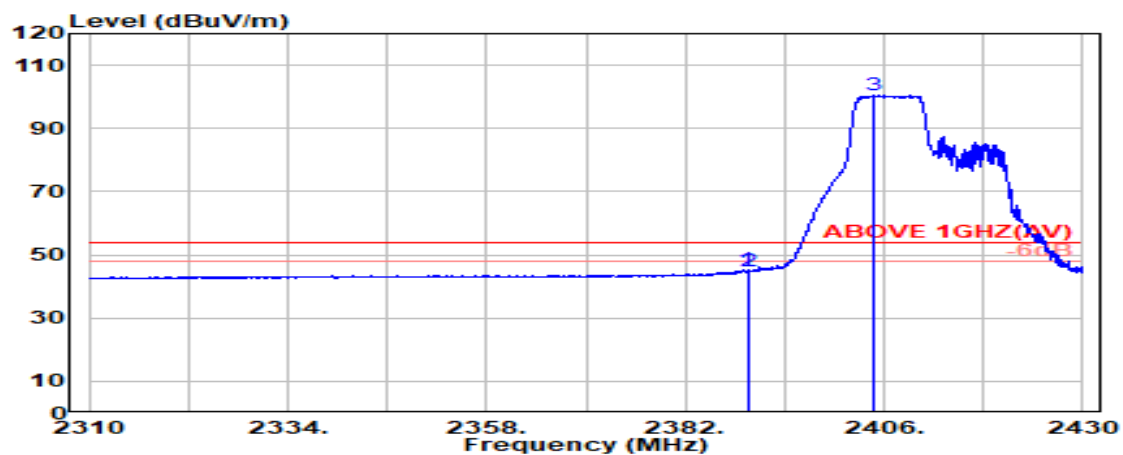

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	51.39	45.37	54.00	8.63	Average
2389.800	28.14	5.72	39.88	50.73	44.72	54.00	9.28	Average
@ 2404.600	28.12	5.74	39.88	106.45	100.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

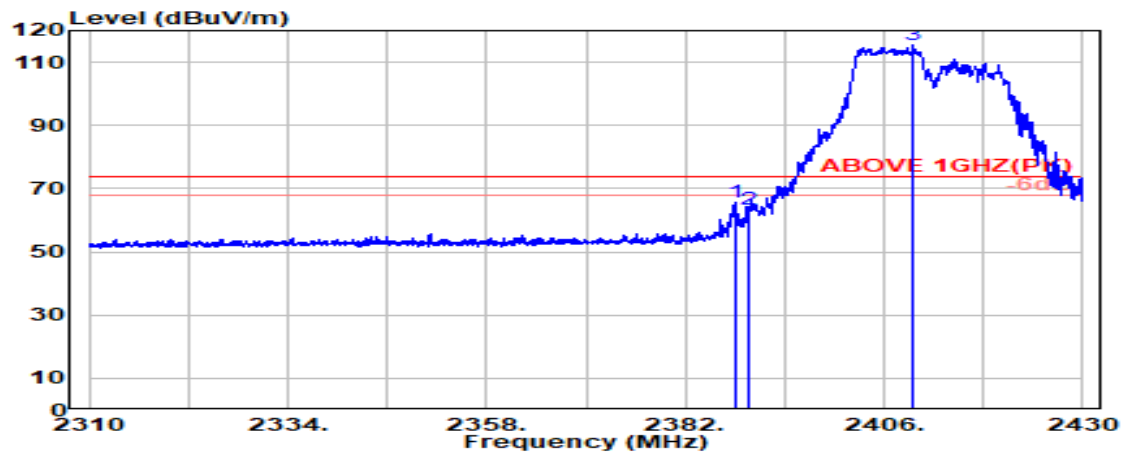

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.000	28.15	5.72	39.88	71.55	65.54	74.00	8.46	Peak
2389.800	28.14	5.72	39.88	69.44	63.42	74.00	10.58	Peak
@ 2409.600	28.14	5.74	39.88	121.27	115.28	---	---	Peak

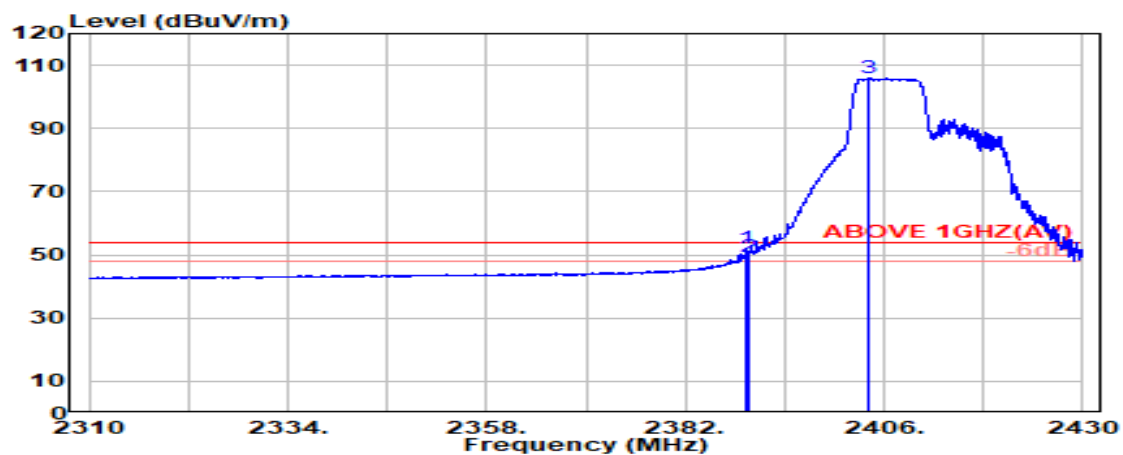

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	57.97	51.95	54.00	2.05	Average
2389.800	28.14	5.72	39.88	55.47	49.45	54.00	4.55	Average
@ 2404.050	28.12	5.74	39.88	111.93	105.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

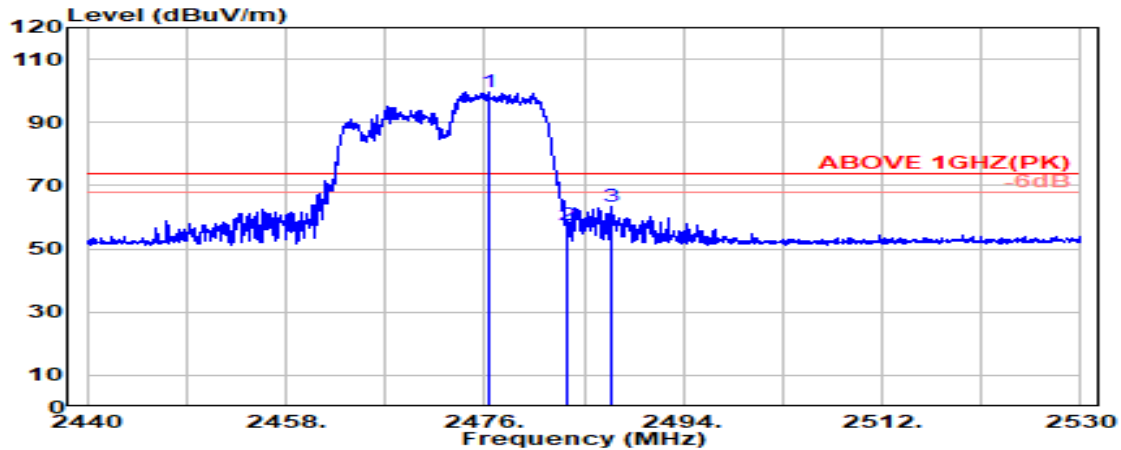

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.300	28.35	5.82	39.87	105.37	99.68	---	---	Peak
2483.500	28.37	5.83	39.87	63.16	57.48	74.00	16.52	Peak
2487.500	28.38	5.84	39.87	69.25	63.59	74.00	10.41	Peak

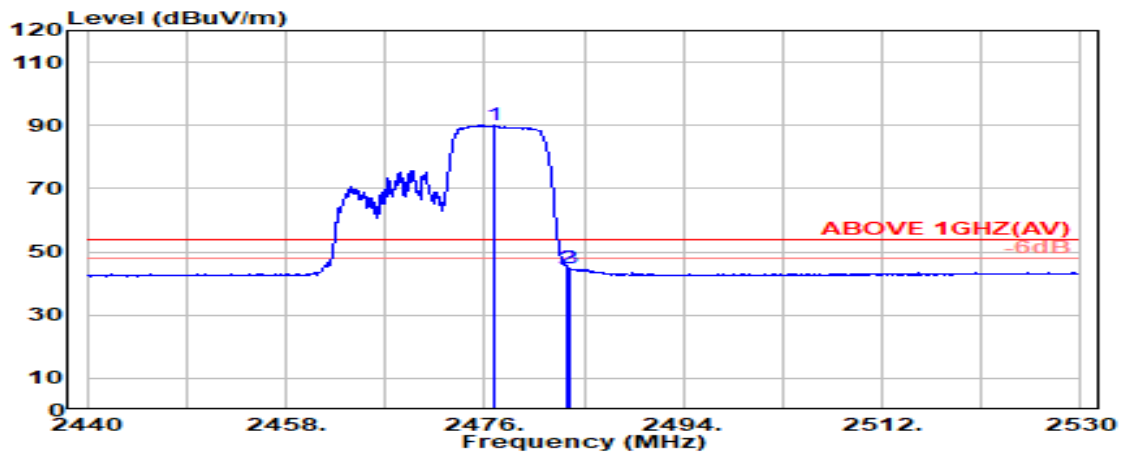

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.800	28.35	5.82	39.87	95.73	90.04	---	---	Average
2483.500	28.37	5.83	39.87	50.69	45.02	54.00	8.98	Average
2483.700	28.37	5.83	39.87	50.32	44.65	54.00	9.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

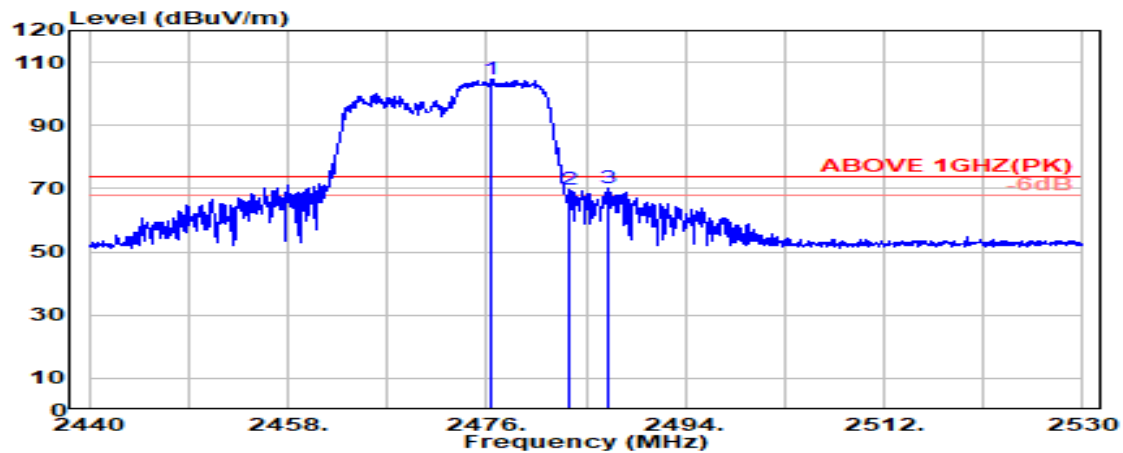

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.35	5.82	39.87	110.50	104.80	---	---	Peak
2483.500	28.37	5.83	39.87	75.32	69.65	74.00	4.35	Peak
2487.000	28.37	5.84	39.87	75.95	70.29	74.00	3.71	Peak

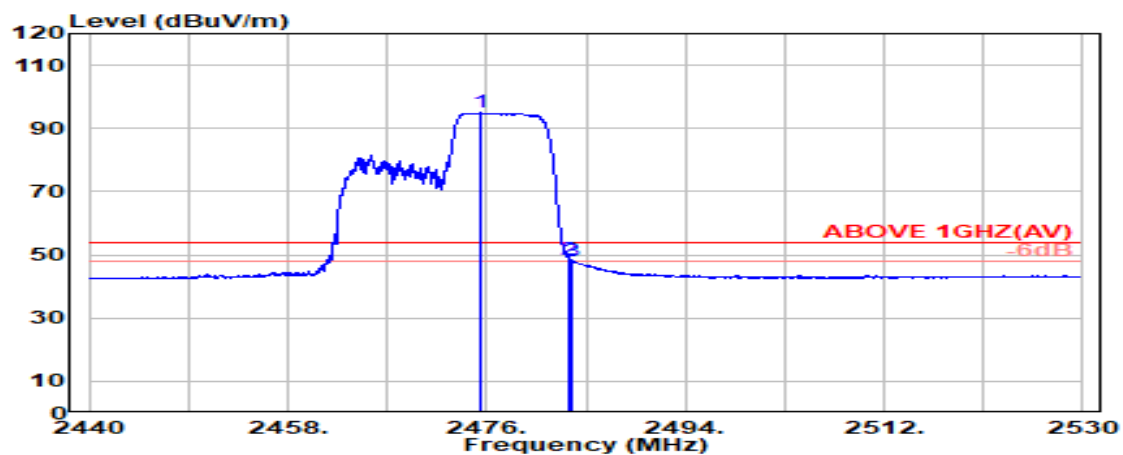

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.450	28.35	5.82	39.87	100.58	94.88	---	---	Average
2483.500	28.37	5.83	39.87	54.21	48.53	54.00	5.47	Average
2483.700	28.37	5.83	39.87	53.64	47.97	54.00	6.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

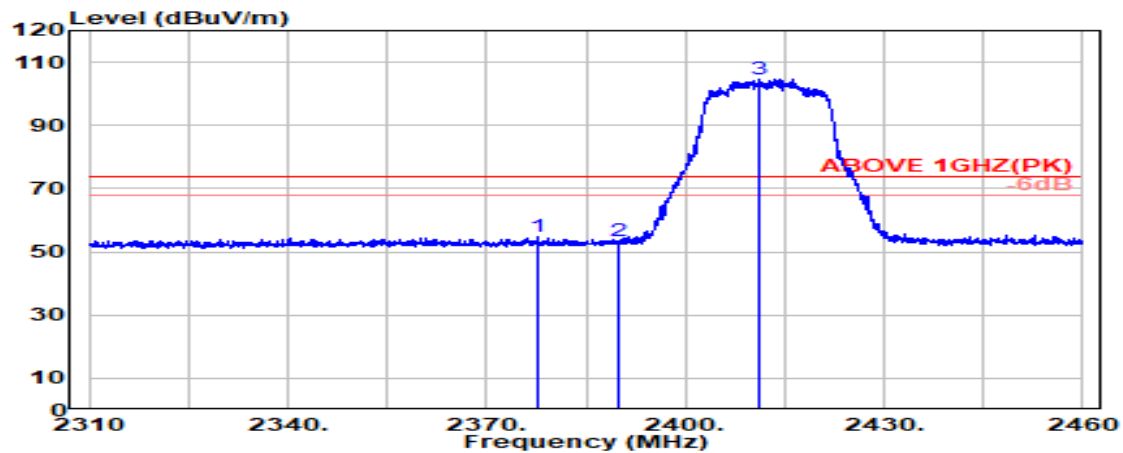

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.750	28.19	5.71	39.88	60.81	54.83	74.00	19.17	Peak
2389.800	28.14	5.72	39.88	59.32	53.30	74.00	20.70	Peak
@ 2411.300	28.15	5.75	39.88	110.79	104.80	---	---	Peak

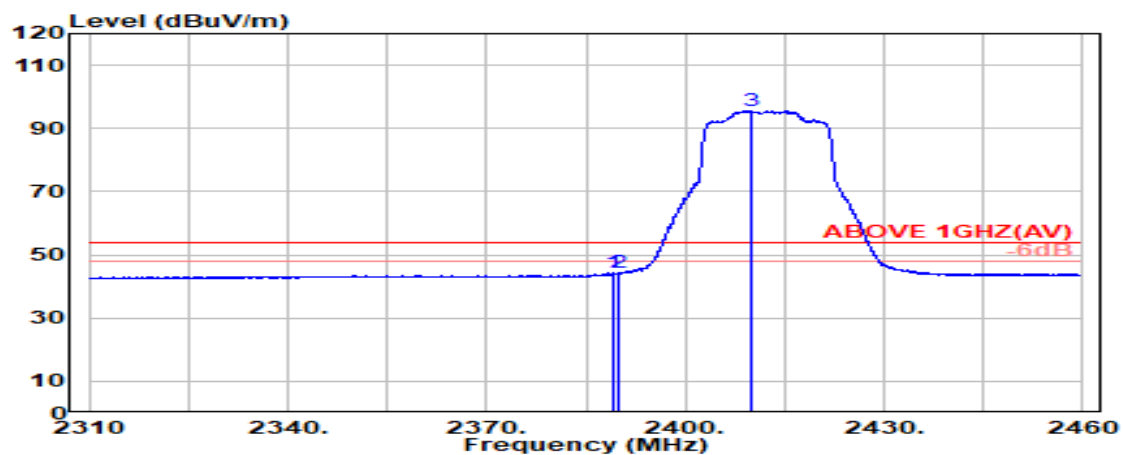

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	50.25	44.24	54.00	9.76	Average
2389.800	28.14	5.72	39.88	50.48	44.46	54.00	9.54	Average
@ 2409.800	28.14	5.74	39.88	101.45	95.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

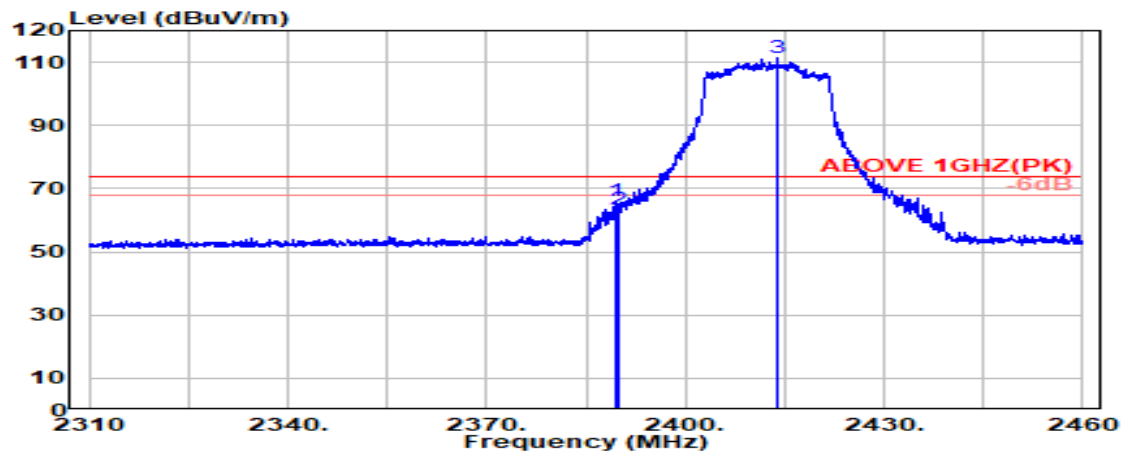

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	71.95	65.93	74.00	8.07	Peak
2389.800	28.14	5.72	39.88	69.59	63.57	74.00	10.43	Peak
@ 2413.800	28.16	5.75	39.88	117.31	111.34	---	---	Peak

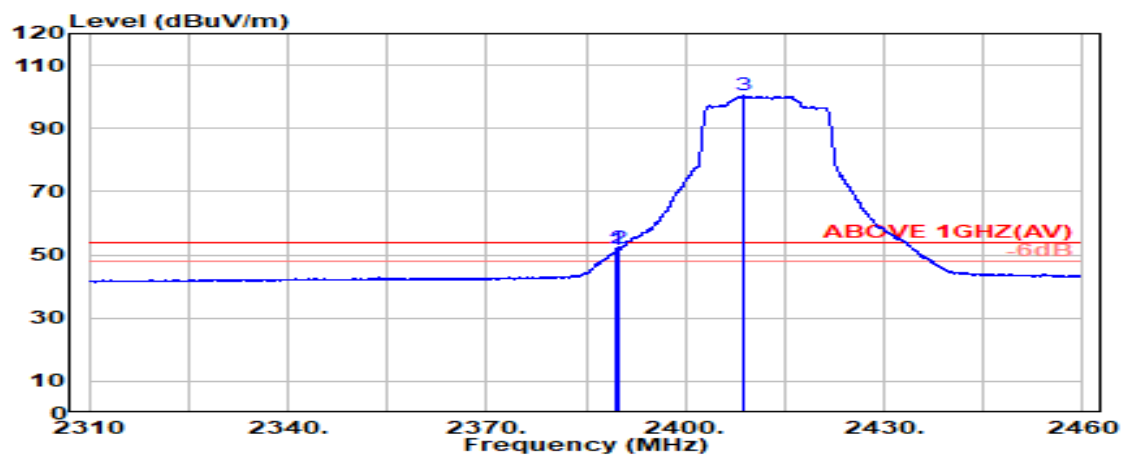


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	57.56	51.55	54.00	2.45	Average
2389.800	28.14	5.72	39.88	58.17	52.15	54.00	1.85	Average
@ 2408.950	28.14	5.74	39.88	106.31	100.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

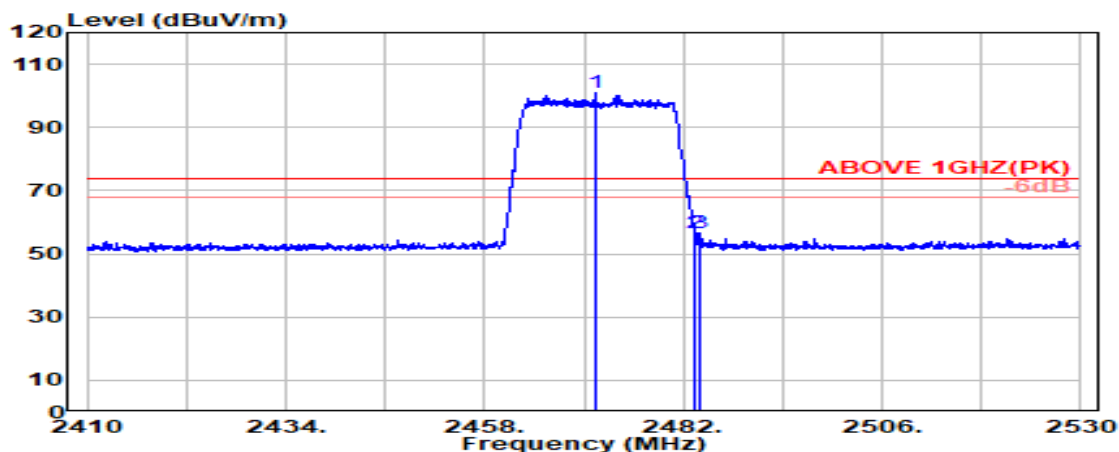

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.400	28.34	5.82	39.87	106.78	101.07	---	---	Peak
2483.500	28.37	5.83	39.87	62.24	56.57	74.00	17.43	Peak
2484.100	28.37	5.83	39.87	62.14	56.47	74.00	17.53	Peak

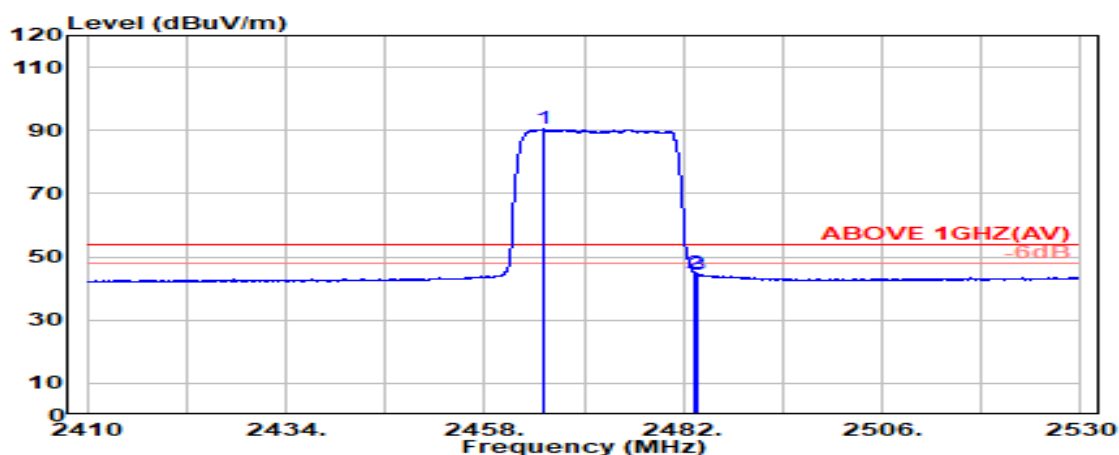

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.33	5.81	39.87	96.15	90.42	---	---	Average
2483.500	28.37	5.83	39.87	50.33	44.65	54.00	9.35	Average
2483.700	28.37	5.83	39.87	50.03	44.36	54.00	9.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

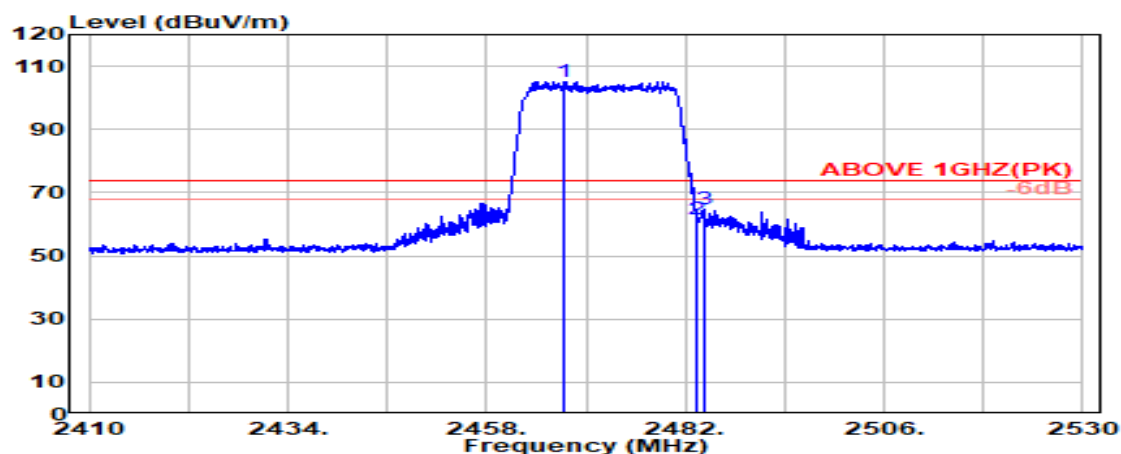

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.450	28.34	5.81	39.87	110.82	105.09	---	---	Peak
2483.500	28.37	5.83	39.87	67.48	61.81	74.00	12.19	Peak
2484.200	28.37	5.83	39.87	70.59	64.92	74.00	9.08	Peak

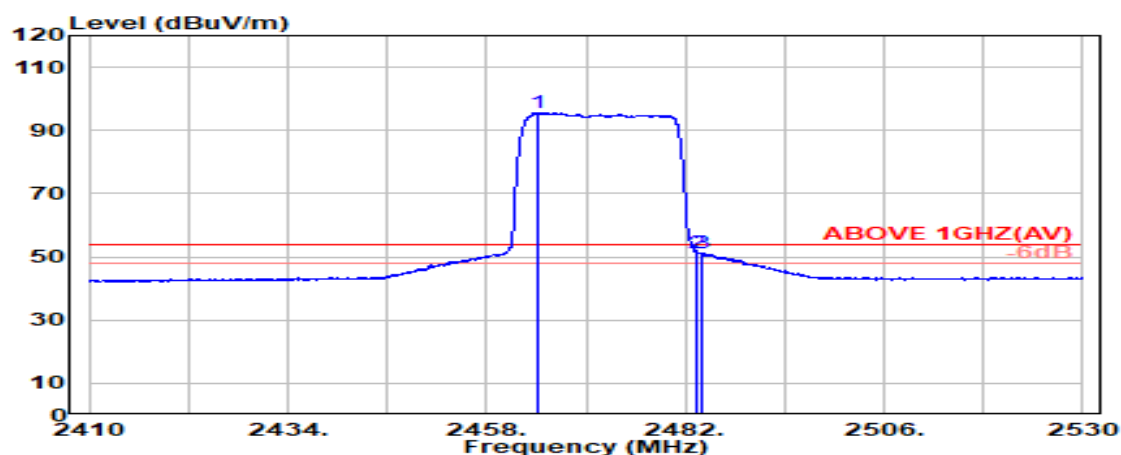

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.33	5.81	39.87	101.24	95.50	---	---	Average
2483.500	28.37	5.83	39.87	56.81	51.13	54.00	2.87	Average
2484.000	28.37	5.83	39.87	56.91	51.24	54.00	2.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

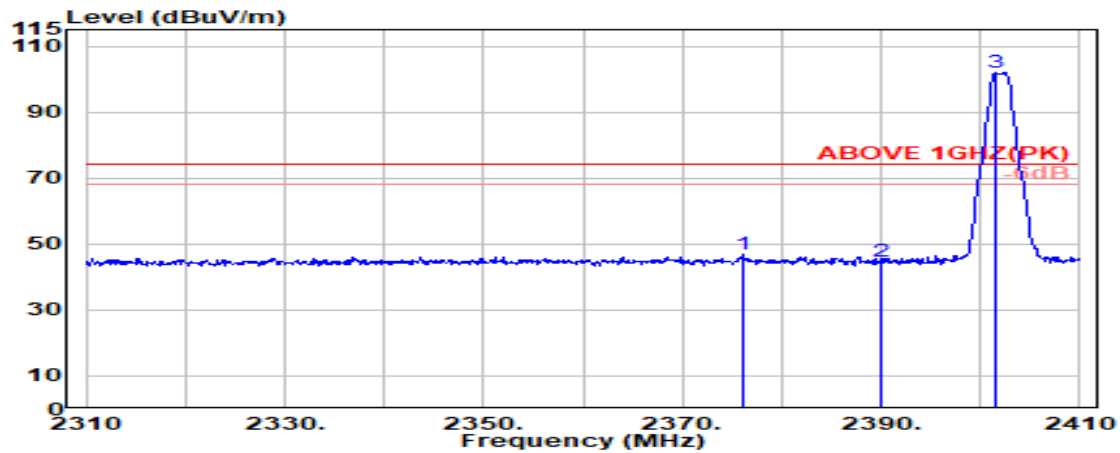

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.70	39.88	52.68	46.71	74.00	27.29	Peak
2390.000	28.14	5.72	39.88	50.77	44.76	74.00	29.24	Peak
@ 2401.500	28.11	5.73	39.88	108.10	102.07	---	---	Peak

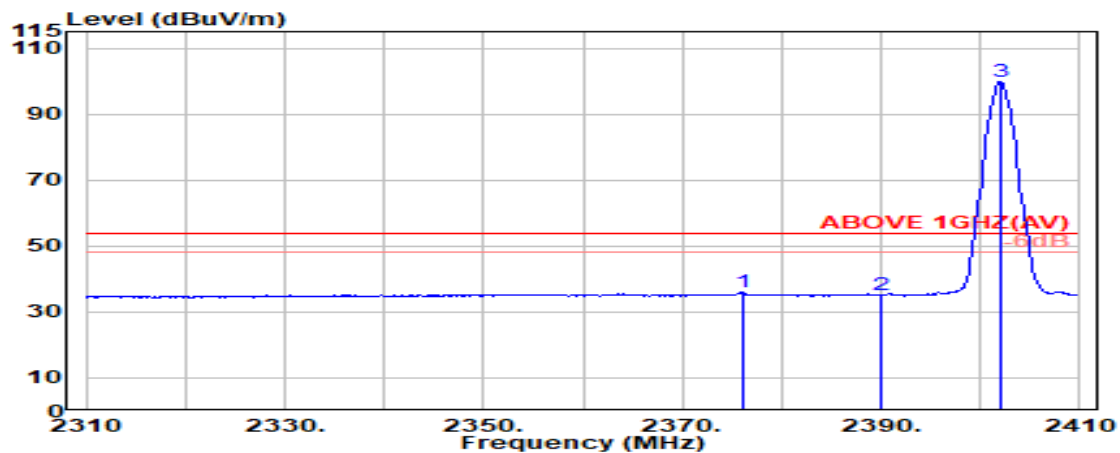

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.100	28.20	5.70	39.88	41.97	35.99	54.00	18.01	Average
2390.000	28.14	5.72	39.88	41.13	35.11	54.00	18.89	Average
@ 2402.000	28.11	5.74	39.88	105.90	99.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

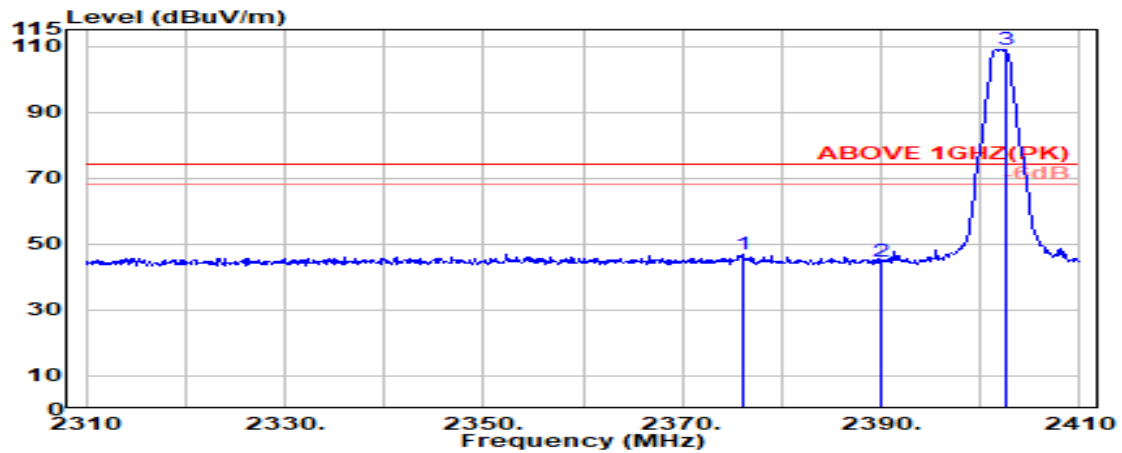

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.100	28.20	5.70	39.88	52.97	46.99	74.00	27.01	Peak
2390.000	28.14	5.72	39.88	50.82	44.80	74.00	29.20	Peak
@ 2402.500	28.11	5.74	39.88	115.12	109.09	---	---	Peak

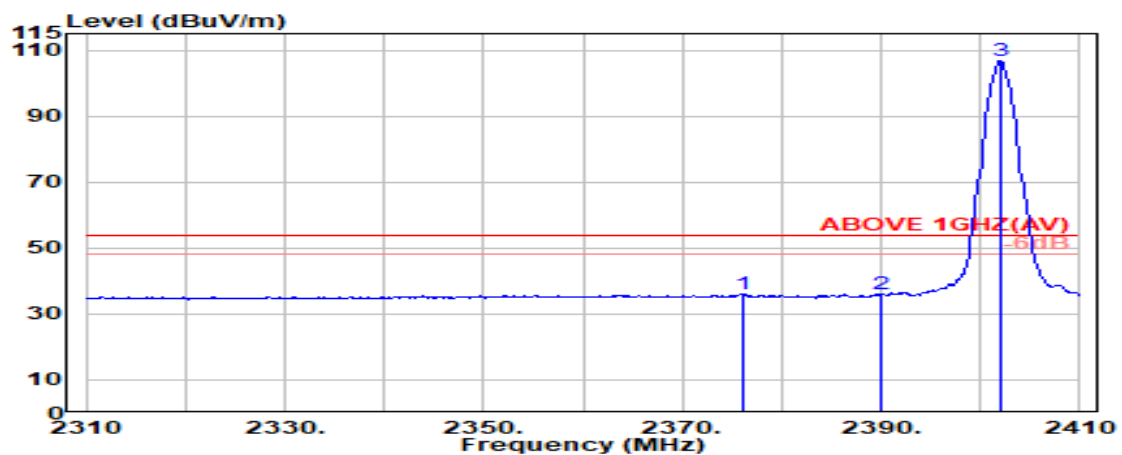

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.70	39.88	42.17	36.19	54.00	17.81	Average
2390.000	28.14	5.72	39.88	41.82	35.80	54.00	18.20	Average
@ 2402.000	28.11	5.74	39.88	112.63	106.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

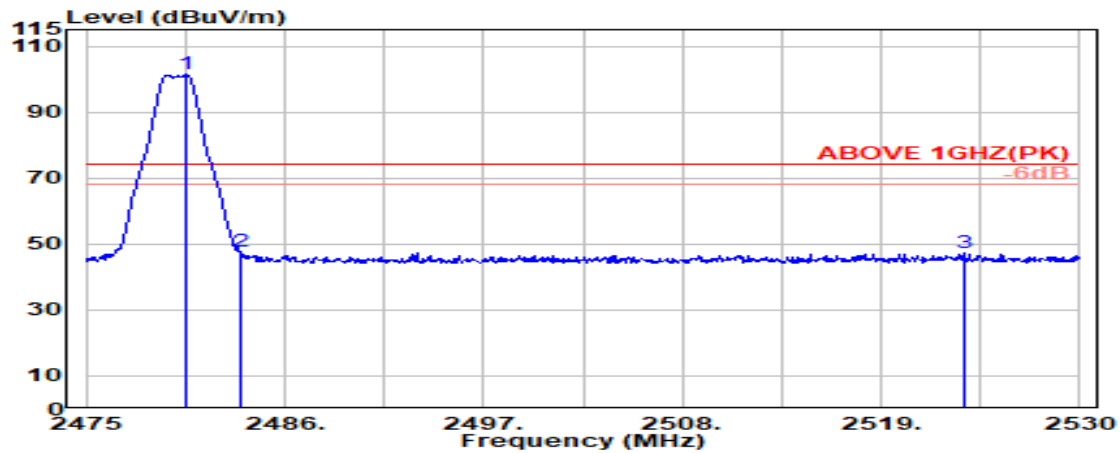

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.83	39.87	107.02	101.34	---	---	Peak
2483.500	28.37	5.83	39.87	53.21	47.54	74.00	26.46	Peak
2523.600	28.54	5.88	39.88	52.92	47.47	74.00	26.53	Peak

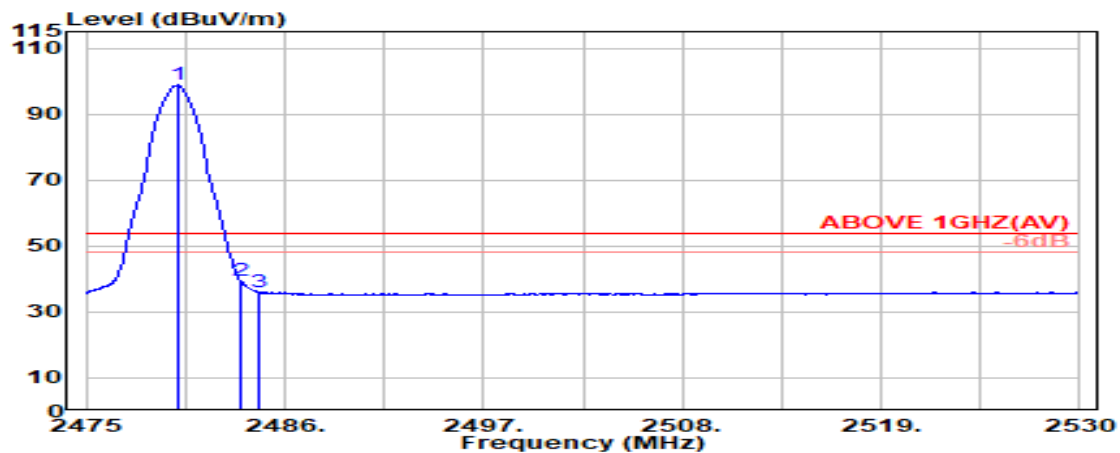

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	104.44	98.75	---	---	Average
2483.500	28.37	5.83	39.87	45.33	39.66	54.00	14.34	Average
2484.600	28.37	5.83	39.87	41.79	36.12	54.00	17.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

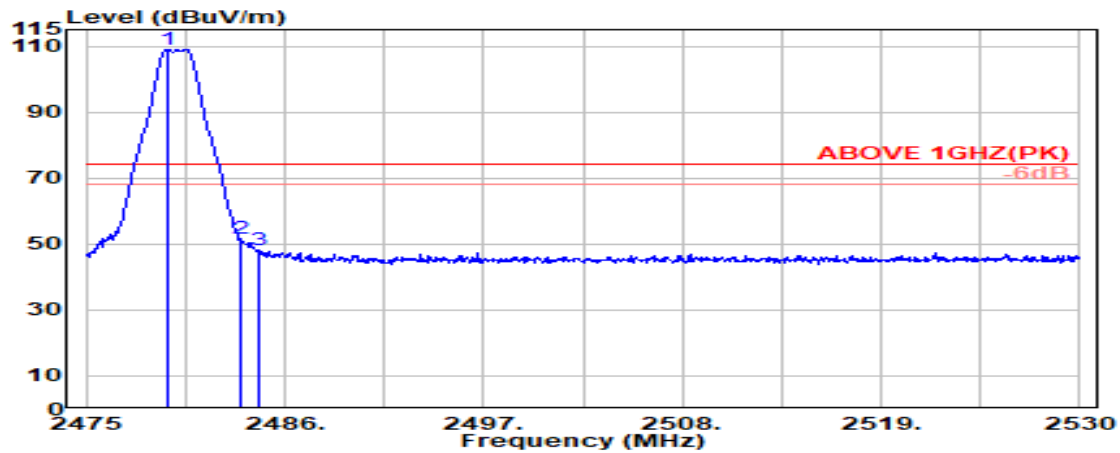

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2479.500	28.36	5.83	39.87	114.75	109.06	---	---	Peak
	2483.500	28.37	5.83	39.87	57.26	51.59	74.00	22.41	Peak
	2484.500	28.37	5.83	39.87	53.80	48.13	74.00	25.87	Peak

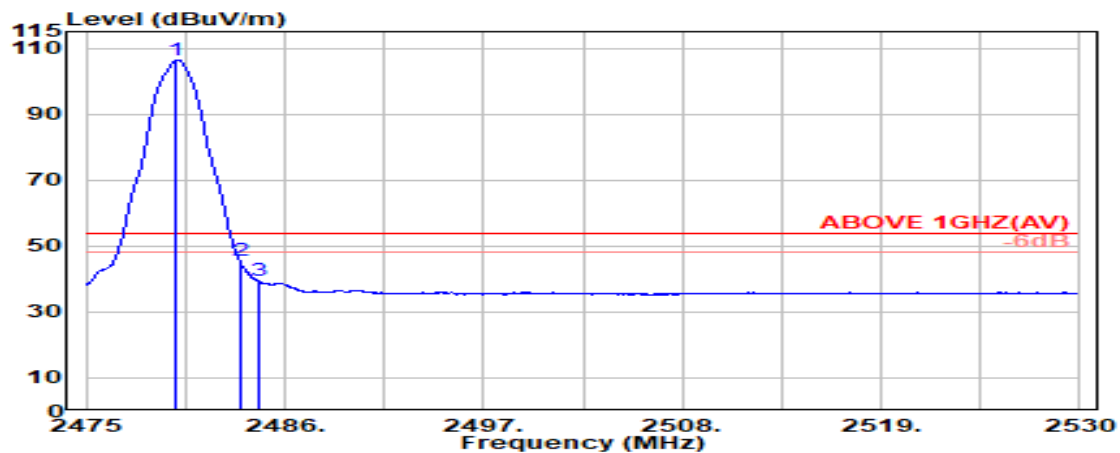

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.000	28.36	5.83	39.87	112.20	106.52	---	---	Average
	2483.500	28.37	5.83	39.87	51.22	45.55	54.00	8.45	Average
	2484.500	28.37	5.83	39.87	45.03	39.36	54.00	14.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.56	42.81	54.00	11.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.53	41.79	54.00	12.21	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.00	42.46	54.00	11.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	34.60	42.06	54.00	11.94	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.67	42.93	54.00	11.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.74	43.00	54.00	11.00	Peak

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.35	35.30	42.71	54.00	11.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.35	34.68	42.08	54.00	11.92	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.43	41.69	54.00	12.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.40	41.65	54.00	12.35	Peak

Mode	802.11ax-HE40	Frequency	TX 2437 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.33	42.54	54.00	11.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.66	42.87	54.00	11.13	Peak

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.57	41.83	54.00	12.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.56	41.82	54.00	12.18	Peak

Mode	802.11be-EHT40	Frequency	TX 2437 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	33.85	41.06	54.00	12.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.91	43.12	54.00	10.88	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	35.71	42.67	54.00	11.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	37.15	44.11	54.00	9.89	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.81	43.05	54.00	10.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	32.63	39.87	54.00	14.13	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	34.09	41.58	54.00	12.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	33.79	41.27	54.00	12.73	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.80	42.06	54.00	11.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.21	42.46	54.00	11.54	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.25	42.71	54.00	11.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	34.35	41.81	54.00	12.19	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.65	41.90	54.00	12.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.41	42.66	54.00	11.34	Peak

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.35	34.50	41.90	54.00	12.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.35	34.38	41.78	54.00	12.22	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.69	41.95	54.00	12.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.72	41.97	54.00	12.03	Peak

Mode	802.11ax-HE40	Frequency	TX 2437 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	34.70	41.90	54.00	12.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	34.75	41.96	54.00	12.04	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.12	41.37	54.00	12.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.58	42.84	54.00	11.16	Peak

Mode	802.11be-EHT40	Frequency	TX 2437 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.29	42.50	54.00	11.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	34.72	41.93	54.00	12.07	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	35.52	42.48	54.00	11.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	35.41	42.37	54.00	11.63	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.40	42.64	54.00	11.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.01	42.25	54.00	11.75	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	34.49	41.98	54.00	12.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	31.94	39.43	54.00	14.57	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.