

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	338
A.2.3 Emissions in Non-restricted Frequency Bands.....	383
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	384
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	384
A.3.2 Measurement Plots	396
A.4 POWER SPECTRAL DENSITY	420
A.4.1 Power Spectral Density Result	420
A.4.2 Measurement Plots	430
A.5 FREQUENCY STABILITY	447
A.5.1 Frequency stability Result	447

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION


Test Date	2024/11/06	Temp./Hum.	24°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Antenna	INPAQ		

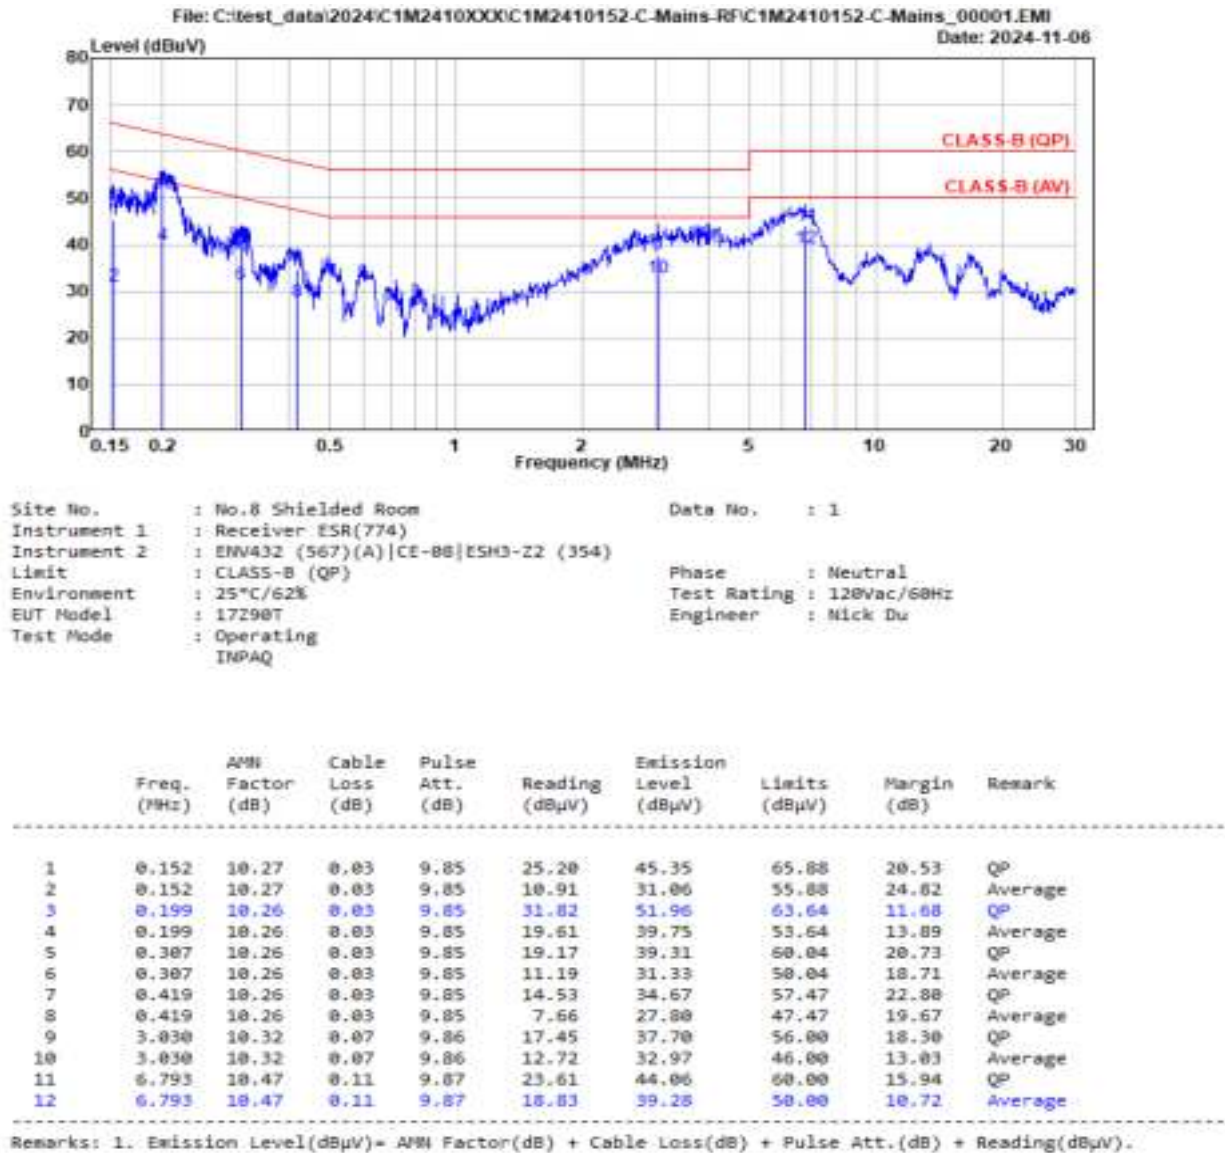

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2024/11/06	Temp./Hum.	24°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Antenna	INPAQ		

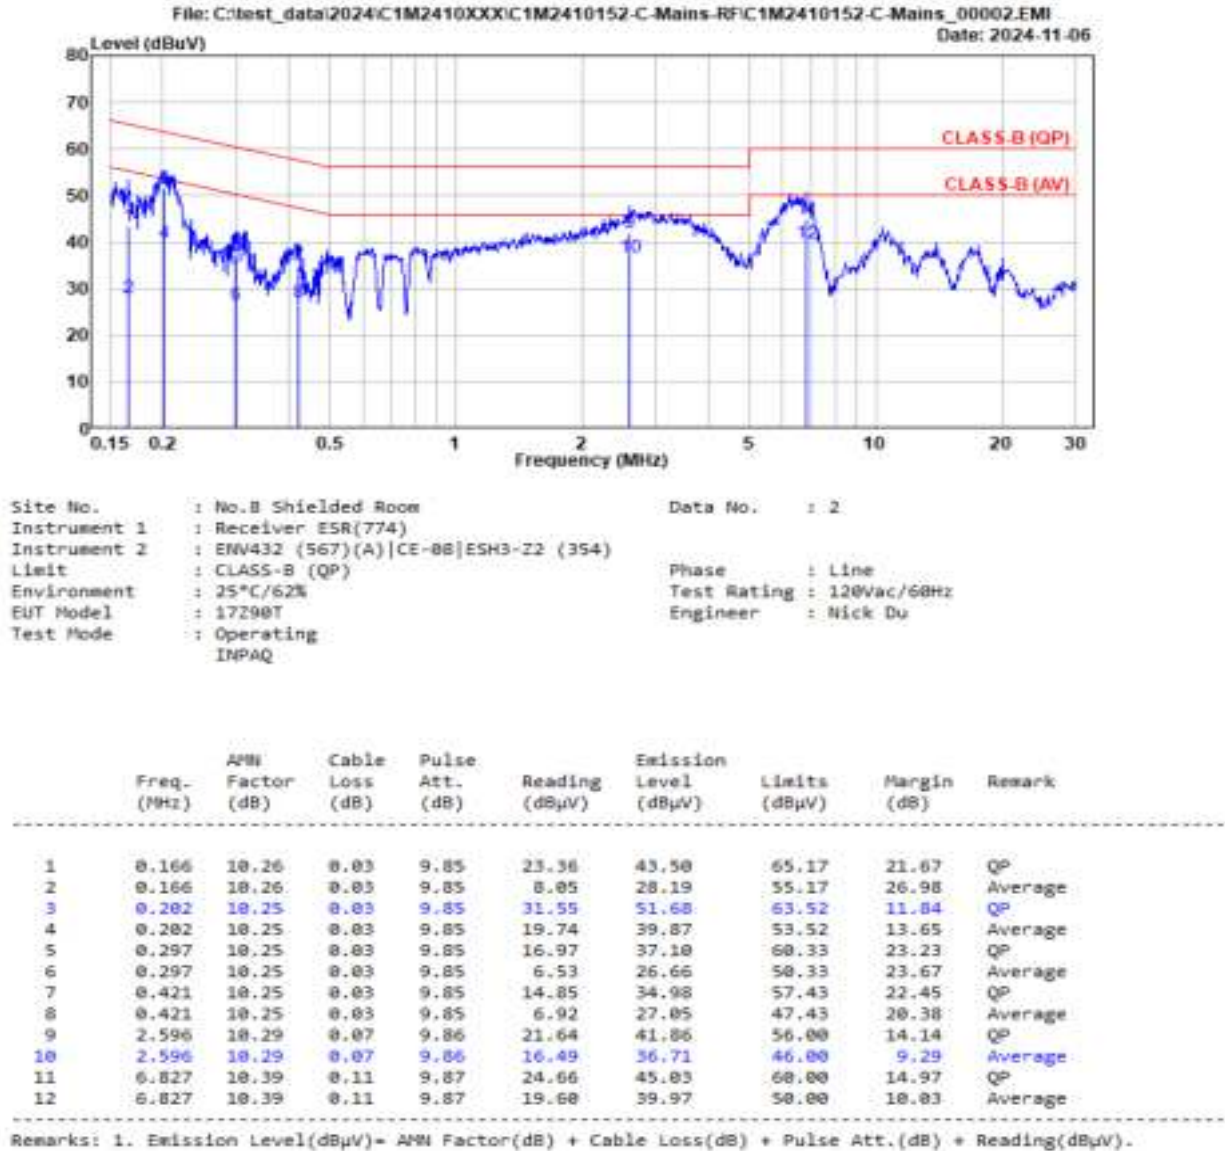

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	24°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Antenna	LUXSHARE-ICT		

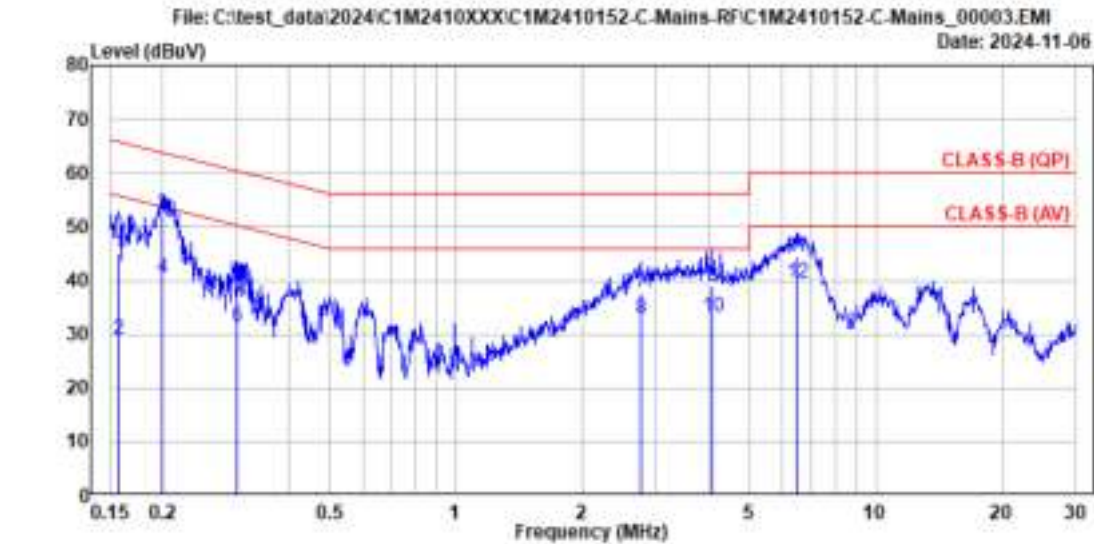

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENM432 (567)(A) CE-88 ESH3-22 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 17290T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.157	10.27	0.03	9.85	24.72	44.87	65.63	20.76	QP
2	0.157	10.27	0.03	9.85	8.81	28.96	55.63	26.67	Average
3	0.200	10.26	0.03	9.85	31.97	52.11	63.60	11.49	QP
4	0.200	10.26	0.03	9.85	20.21	40.35	53.60	13.25	Average
5	0.301	10.26	0.03	9.85	18.93	39.07	60.20	21.13	QP
6	0.301	10.26	0.03	9.85	11.36	31.50	50.20	18.70	Average
7	2.756	10.31	0.07	9.86	17.62	37.86	56.00	18.14	QP
8	2.756	10.31	0.07	9.86	12.53	32.77	46.00	13.23	Average
9	4.086	10.35	0.08	9.86	18.52	38.81	56.00	17.19	QP
10	4.086	10.35	0.08	9.86	12.90	33.19	46.00	12.81	Average
11	6.463	10.46	0.11	9.87	23.98	44.42	60.00	15.58	QP
12	6.463	10.46	0.11	9.87	19.16	39.60	50.00	10.40	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/06	Temp./Hum.	24°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Antenna	LUXSHARE-ICT		

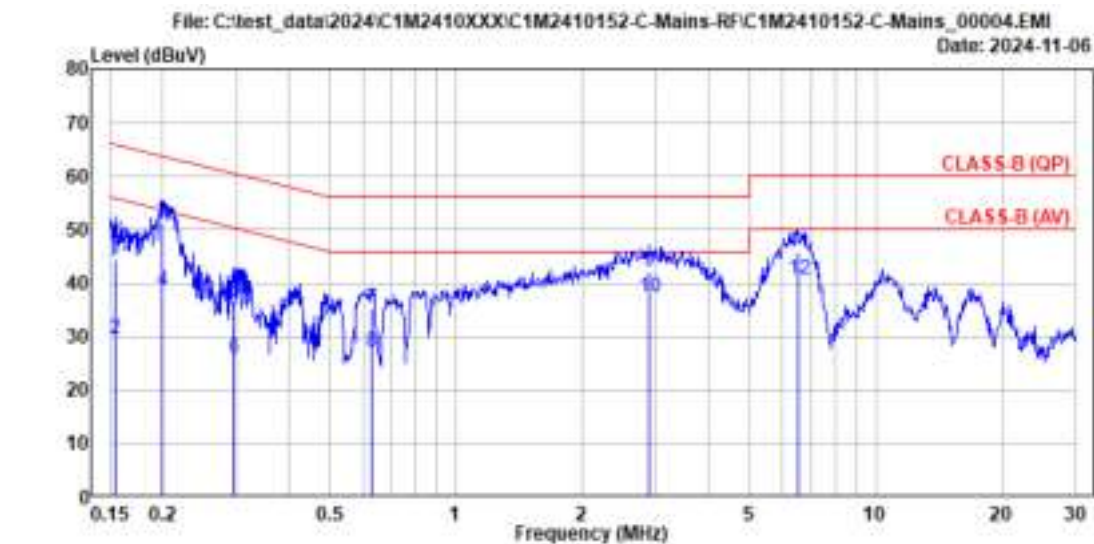

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 17290T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		

	Freq. (MHz)	APN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.26	0.03	9.85	24.28	44.42	65.79	21.37	QP
2	0.154	10.26	0.03	9.85	9.31	29.45	55.79	26.34	Average
3	0.199	10.25	0.03	9.85	31.20	51.33	63.64	12.31	QP
4	0.199	10.25	0.03	9.85	18.48	38.61	53.64	15.03	Average
5	0.295	10.25	0.03	9.85	16.48	36.61	60.37	23.76	QP
6	0.295	10.25	0.03	9.85	5.83	25.96	50.37	24.41	Average
7	0.627	10.25	0.03	9.85	15.04	35.17	56.00	20.83	QP
8	0.627	10.25	0.03	9.85	7.07	27.20	46.00	18.80	Average
9	2.882	10.29	0.07	9.86	22.18	42.40	56.00	13.60	QP
10	2.882	10.29	0.07	9.86	17.00	37.30	46.00	8.70	Average
11	6.527	10.38	0.11	9.87	25.56	45.92	60.00	14.08	QP
12	6.527	10.38	0.11	9.87	20.54	40.90	50.00	9.10	Average

Remarks: 1. Emission Level(dBμV)= APN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/10/24 ~ 11/15	Temp./Hum.	22 ~ 25°C/52 ~ 64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu/Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Antenna: INPAQ

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	24.02	1.41	26.49	31.18	30.12	40.00	9.88	Peak
150.000	16.30	3.20	26.00	38.92	32.42	43.50	11.08	Peak
260.500	18.03	4.36	25.67	32.20	28.91	46.00	17.09	Peak
383.500	20.73	5.75	26.32	33.06	33.22	46.00	12.78	Peak
487.000	22.63	6.66	27.05	32.13	34.37	46.00	11.63	Peak
563.000	23.63	6.98	27.31	32.29	35.59	46.00	10.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.53	26.48	39.80	36.71	40.00	3.29	Peak
58.000	12.25	1.97	26.42	39.19	26.99	40.00	13.01	Peak
152.500	16.10	3.22	25.99	35.88	29.22	43.50	14.28	Peak
305.000	18.73	4.76	25.66	31.19	29.02	46.00	16.98	Peak
399.500	21.10	5.92	26.44	34.09	34.67	46.00	11.33	Peak
515.500	23.04	6.82	27.18	32.01	34.69	46.00	11.31	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Antenna: LUXSHARE-ICT

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.500	22.47	1.50	26.48	33.08	30.56	40.00	9.44	Peak
120.500	17.90	2.86	26.16	34.83	29.43	43.50	14.07	Peak
149.500	16.33	3.19	26.00	38.57	32.10	43.50	11.40	Peak
297.500	18.58	4.67	25.61	34.66	32.29	46.00	13.71	Peak
428.000	21.62	6.18	26.65	32.52	33.67	46.00	12.33	Peak
540.000	23.34	6.90	27.24	32.69	35.69	46.00	10.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.53	26.48	38.75	35.66	40.00	4.34	Peak
58.000	12.25	1.97	26.42	38.59	26.39	40.00	13.61	Peak
154.500	15.99	3.24	25.98	36.18	29.43	43.50	14.07	Peak
367.500	20.37	5.56	26.20	32.47	32.20	46.00	13.80	Peak
483.500	22.57	6.64	27.03	31.85	34.02	46.00	11.98	Peak
583.000	23.87	7.05	27.36	32.02	35.58	46.00	10.42	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Antenna: INPAQ

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

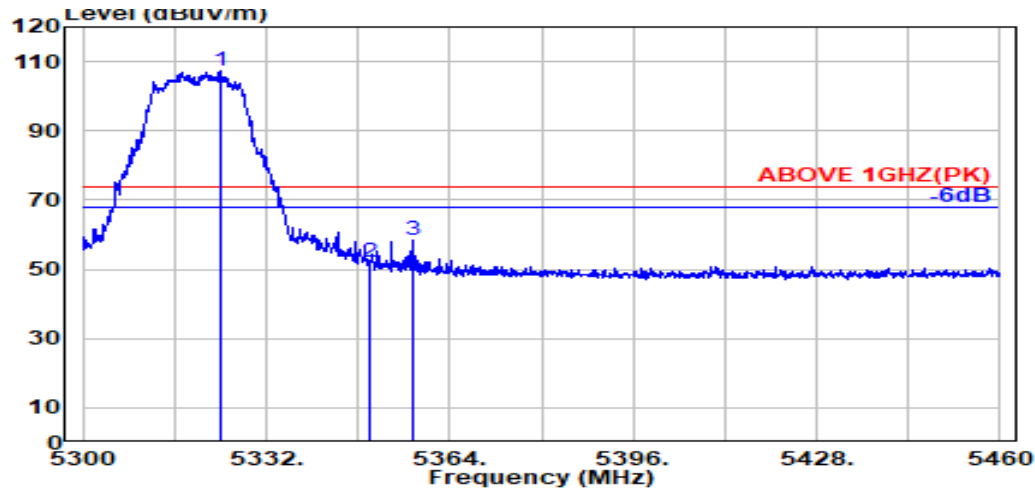

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.00	8.65	34.22	99.00	107.43	---	---	Peak
5350.000	33.90	8.67	34.22	43.68	52.03	74.00	21.97	Peak
5357.600	33.93	8.67	34.21	50.11	58.50	74.00	15.50	Peak

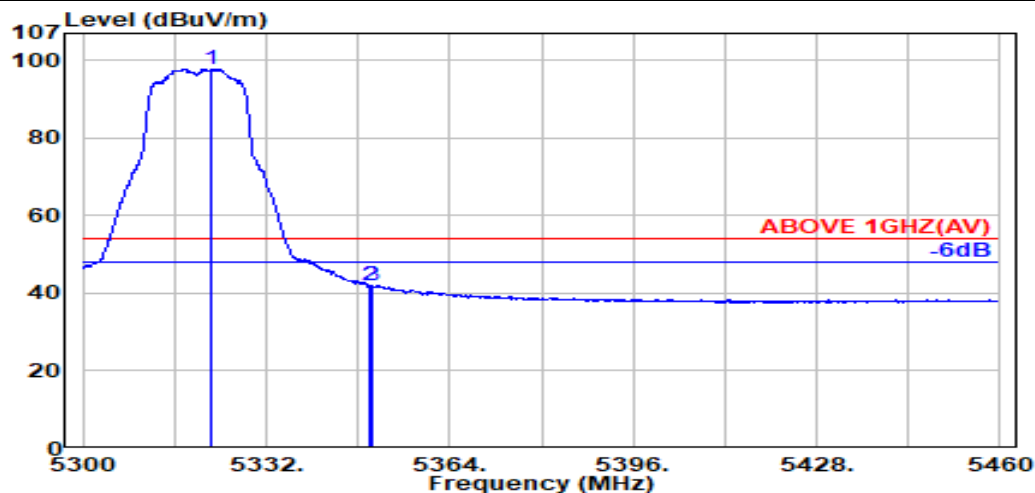

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.500	34.01	8.65	34.23	89.36	97.80	---	---	Average
5350.000	33.90	8.67	34.22	33.55	41.90	54.00	12.10	Average
5350.600	33.90	8.67	34.22	33.61	41.96	54.00	12.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

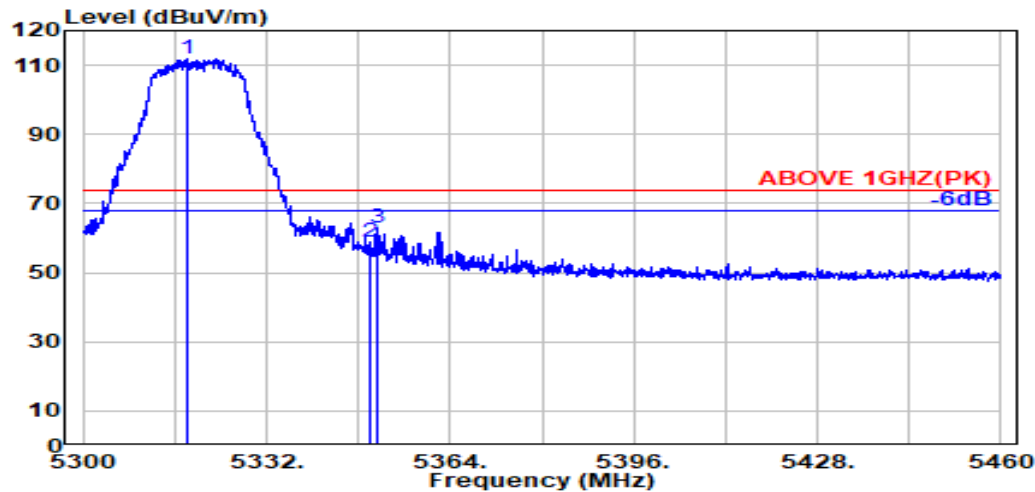

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.300	34.03	8.65	34.23	103.60	112.05	---	---	Peak
5350.000	33.90	8.67	34.22	50.45	58.80	74.00	15.20	Peak
5351.400	33.91	8.67	34.22	54.65	63.01	74.00	10.99	Peak

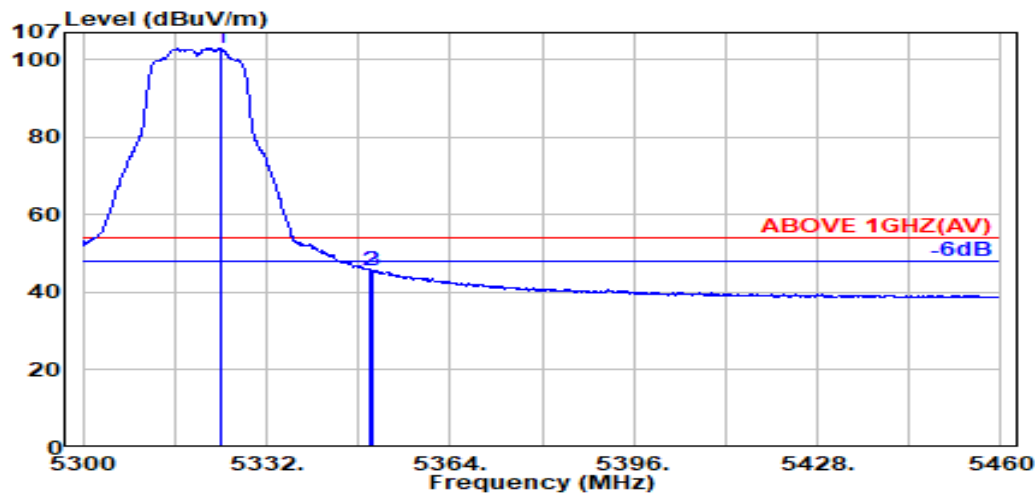

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.00	8.65	34.22	94.50	102.93	---	---	Average
5350.000	33.90	8.67	34.22	37.28	45.63	54.00	8.37	Average
5350.400	33.90	8.67	34.22	37.33	45.68	54.00	8.32	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

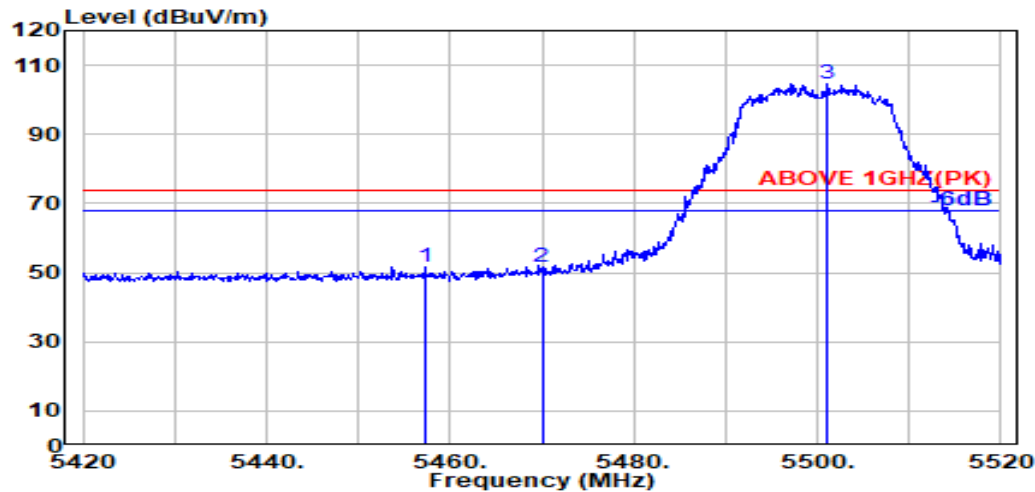

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.200	34.19	8.73	34.18	43.07	51.80	74.00	22.20	Peak
5470.000	34.16	8.74	34.18	42.80	51.52	74.00	22.48	Peak
@ 5501.100	34.10	8.75	34.17	95.89	104.58	---	---	Peak

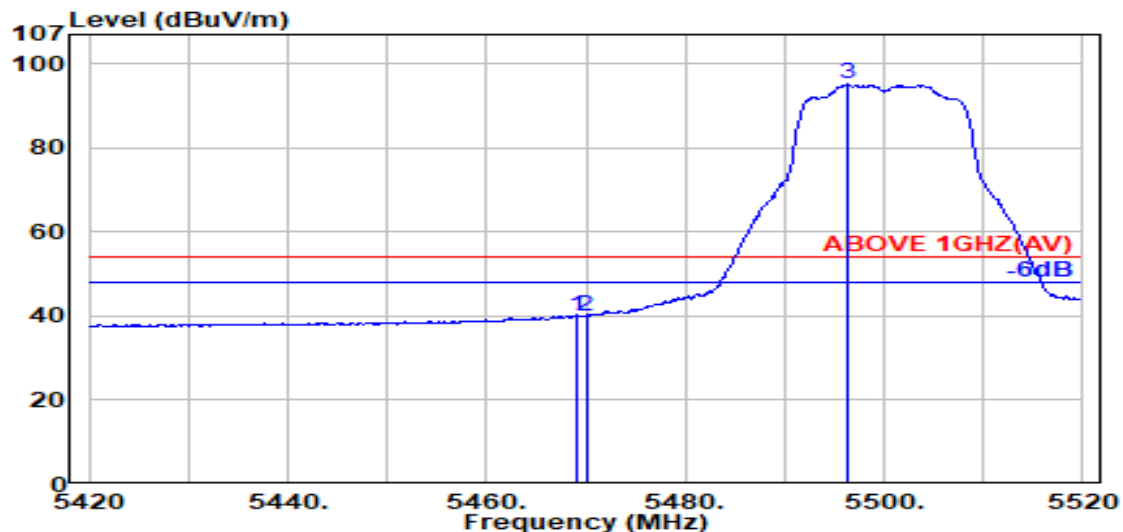

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	31.34	40.05	54.00	13.95	Average
5470.000	34.16	8.74	34.18	31.38	40.10	54.00	13.90	Average
@ 5496.400	34.11	8.75	34.17	86.41	95.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

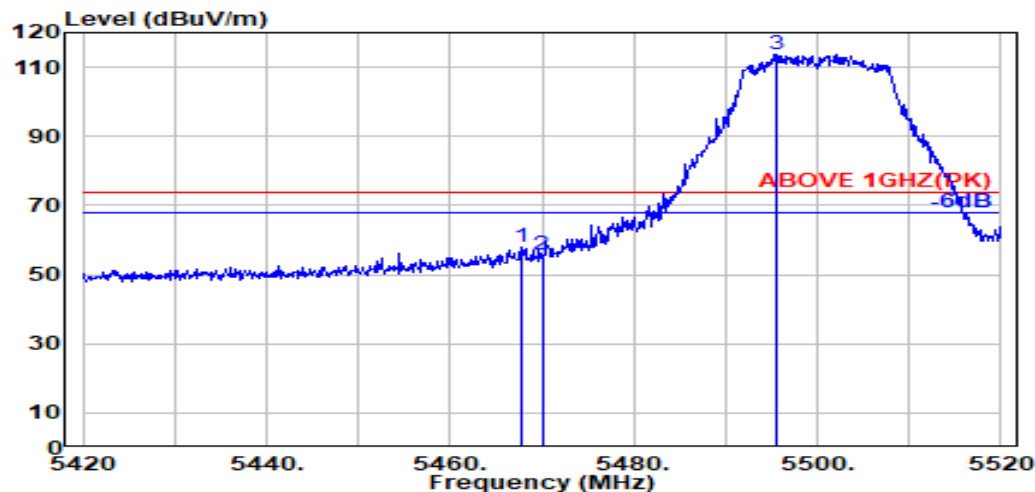

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.16	8.73	34.18	49.44	58.16	74.00	15.84	Peak
5470.000	34.16	8.74	34.18	46.97	55.69	74.00	18.31	Peak
@ 5495.500	34.11	8.75	34.17	105.18	113.87	---	---	Peak

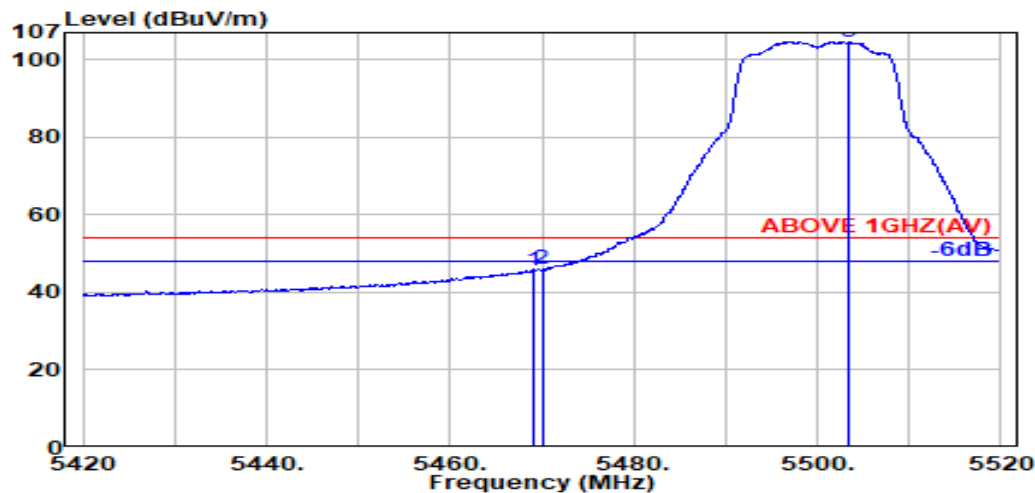

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	37.10	45.81	54.00	8.19	Average
5470.000	34.16	8.74	34.18	37.23	45.95	54.00	8.05	Average
@ 5503.400	34.10	8.76	34.17	95.88	104.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

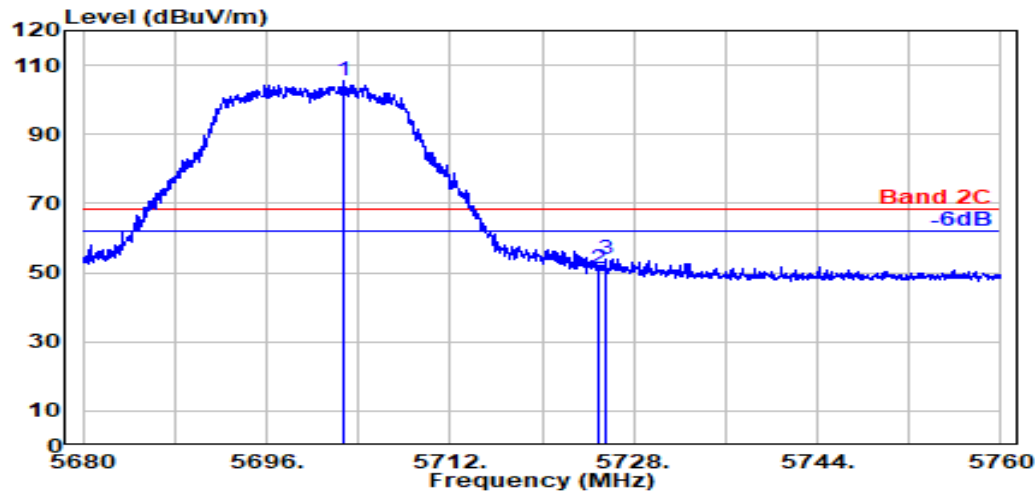

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.750	33.80	8.87	34.27	96.95	105.35	---	---	Peak
5725.000	33.80	8.88	34.28	42.83	51.24	68.20	16.96	Peak
5725.500	33.80	8.88	34.28	45.54	53.94	68.20	14.26	Peak

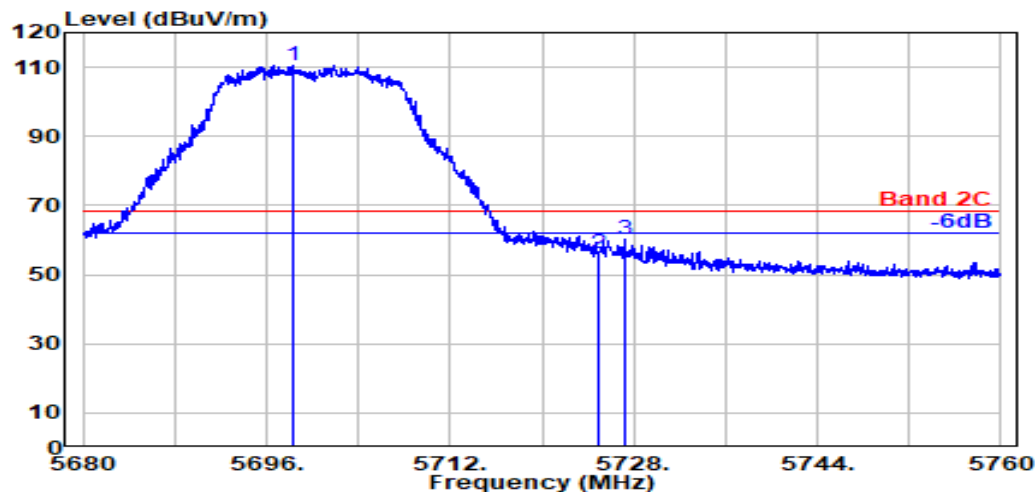

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.350	33.81	8.87	34.26	102.17	110.57	---	---	Peak
5725.000	33.80	8.88	34.28	47.64	56.05	68.20	12.15	Peak
5727.150	33.80	8.88	34.28	51.64	60.05	68.20	8.15	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

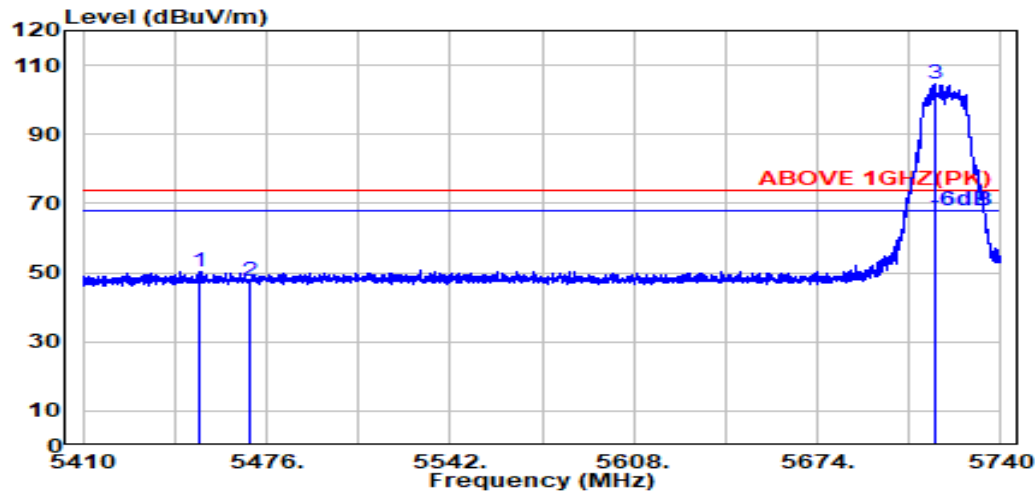

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.200	34.20	8.73	34.18	41.40	50.14	74.00	23.86	Peak
5470.000	34.16	8.74	34.18	39.02	47.73	74.00	26.27	Peak
@ 5716.000	33.80	8.88	34.27	96.18	104.59	---	---	Peak

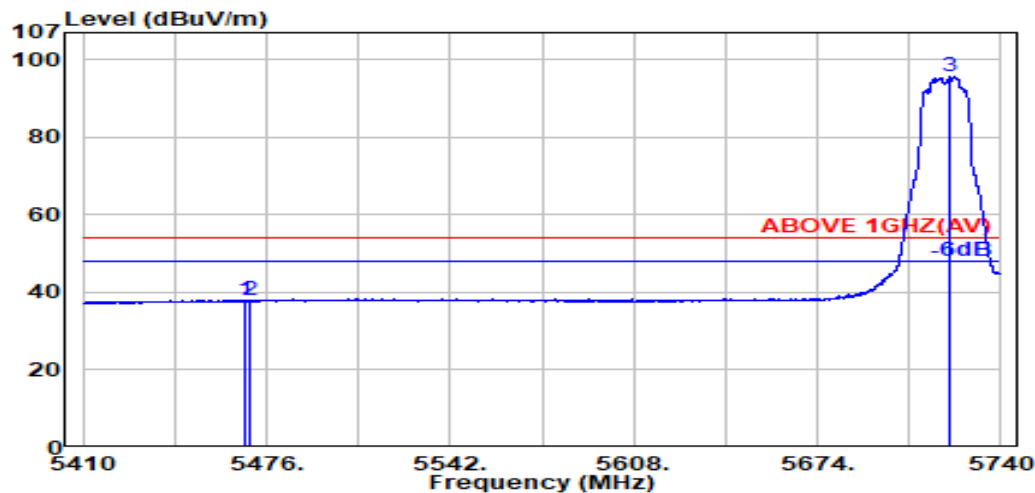

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	29.23	37.95	54.00	16.05	Average
5470.000	34.16	8.74	34.18	29.08	37.79	54.00	16.21	Average
@ 5721.900	33.80	8.88	34.27	87.18	95.58	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

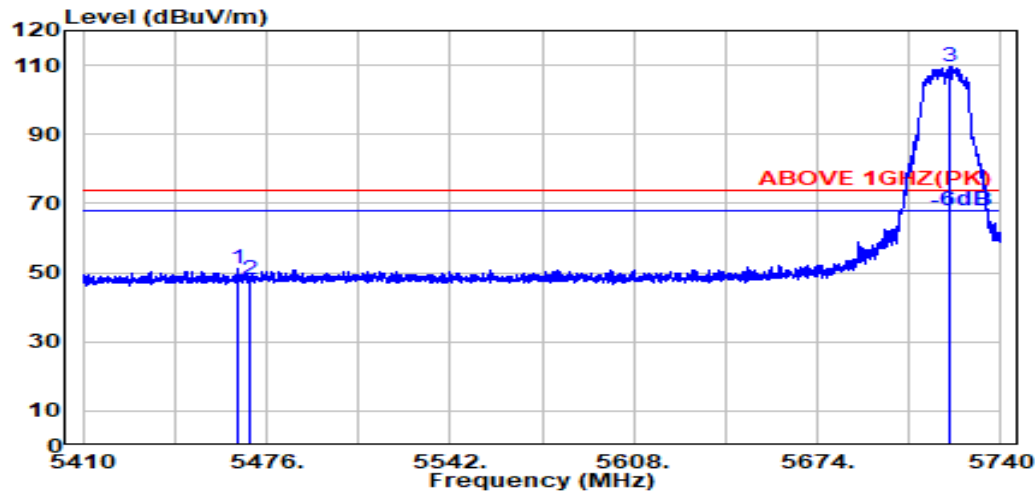

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.17	8.73	34.18	42.37	51.10	74.00	22.90	Peak
5470.000	34.16	8.74	34.18	39.32	48.03	74.00	25.97	Peak
@ 5721.800	33.80	8.88	34.27	100.99	109.40	---	---	Peak

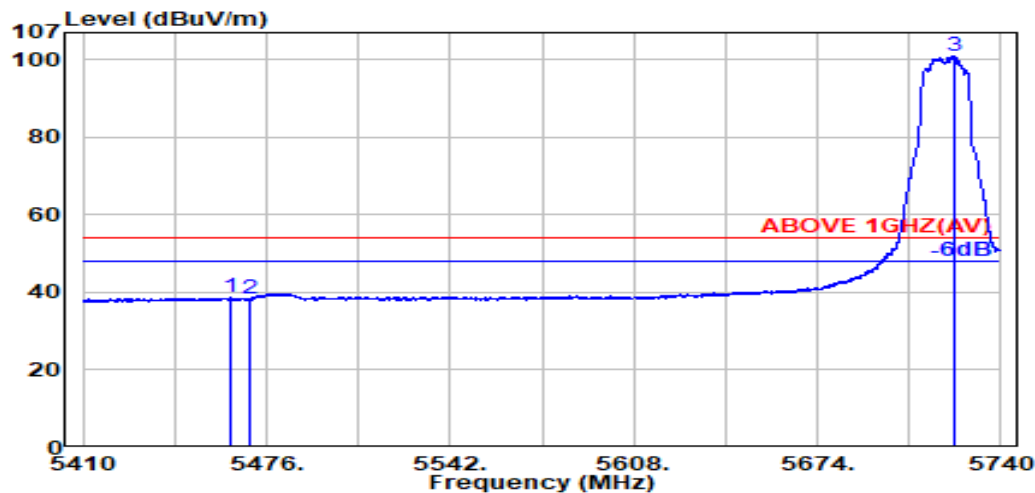

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.17	8.73	34.18	29.86	38.58	54.00	15.42	Average
5470.000	34.16	8.74	34.18	29.48	38.20	54.00	15.80	Average
@ 5723.300	33.80	8.88	34.28	92.46	100.87	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

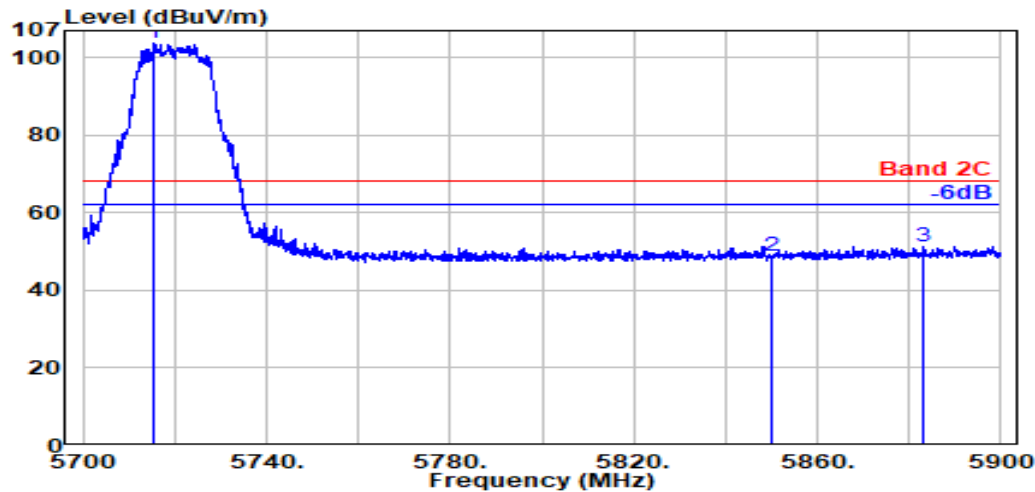

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.500	33.80	8.88	34.27	95.24	103.65	---	---	Peak
5850.000	34.10	8.95	34.33	40.25	48.97	68.20	19.23	Peak
5883.000	34.10	8.97	34.35	42.68	51.40	68.20	16.80	Peak

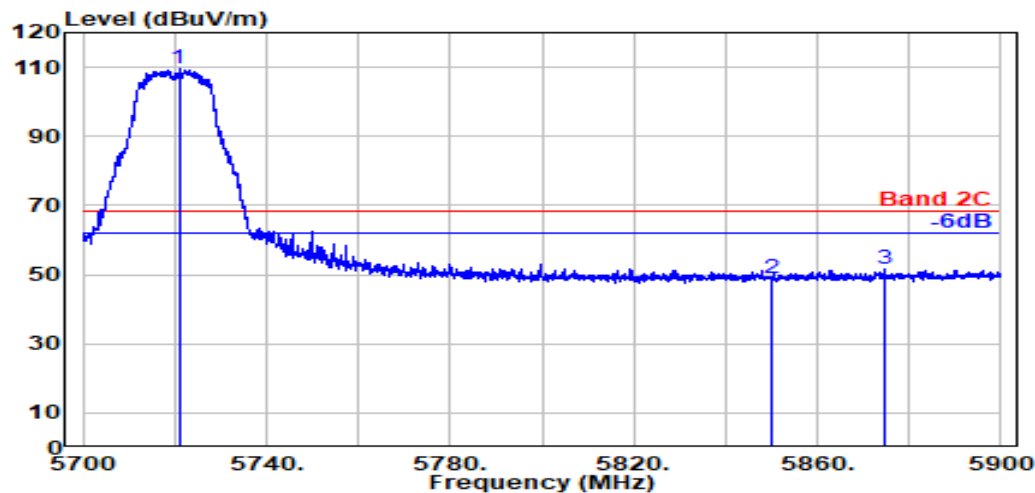

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.900	33.80	8.88	34.27	101.10	109.50	---	---	Peak
5850.000	34.10	8.95	34.33	40.25	48.96	68.20	19.24	Peak
5874.800	34.10	8.96	34.34	42.68	51.40	68.20	16.80	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

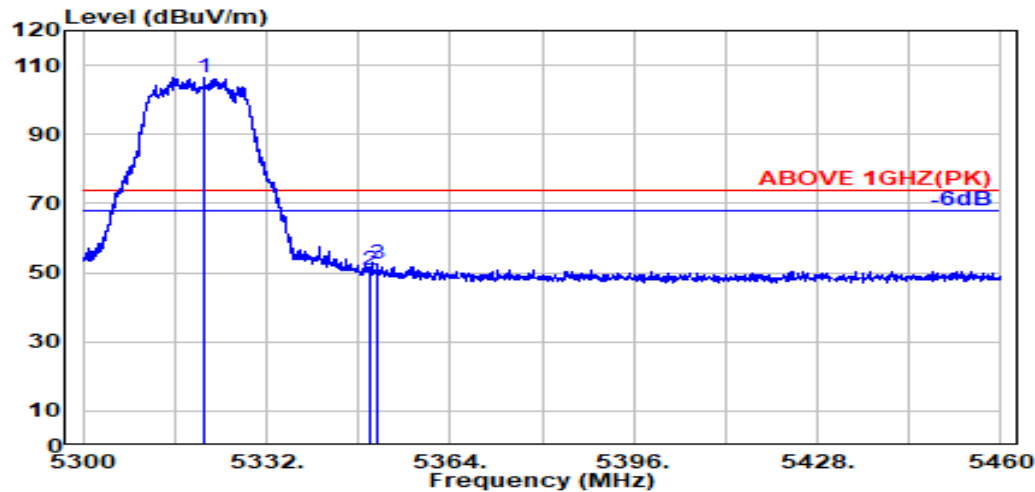

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.100	34.02	8.65	34.23	97.98	106.41	---	---	Peak
5350.000	33.90	8.67	34.22	42.56	50.91	74.00	23.09	Peak
5351.300	33.91	8.67	34.22	43.97	52.33	74.00	21.67	Peak

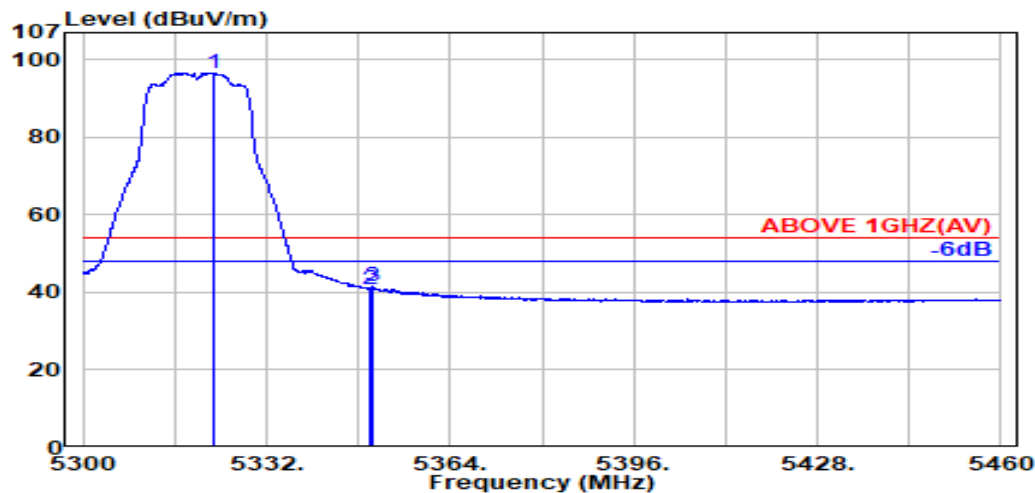

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	34.01	8.65	34.22	88.22	96.65	---	---	Average
5350.000	33.90	8.67	34.22	32.62	40.97	54.00	13.03	Average
5350.600	33.90	8.67	34.22	33.04	41.39	54.00	12.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

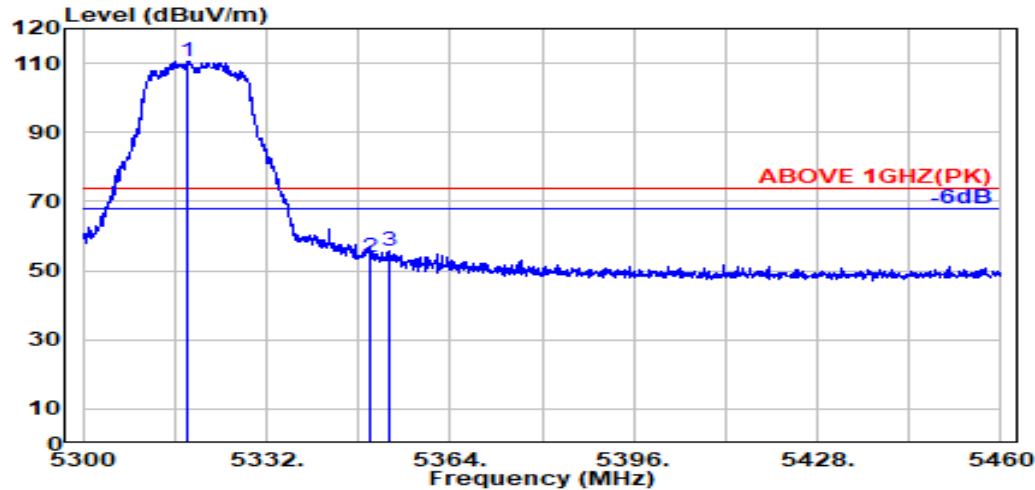

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	34.03	8.65	34.23	102.13	110.58	---	---	Peak
5350.000	33.90	8.67	34.22	45.47	53.82	74.00	20.18	Peak
5353.400	33.91	8.67	34.22	47.48	55.85	74.00	18.15	Peak

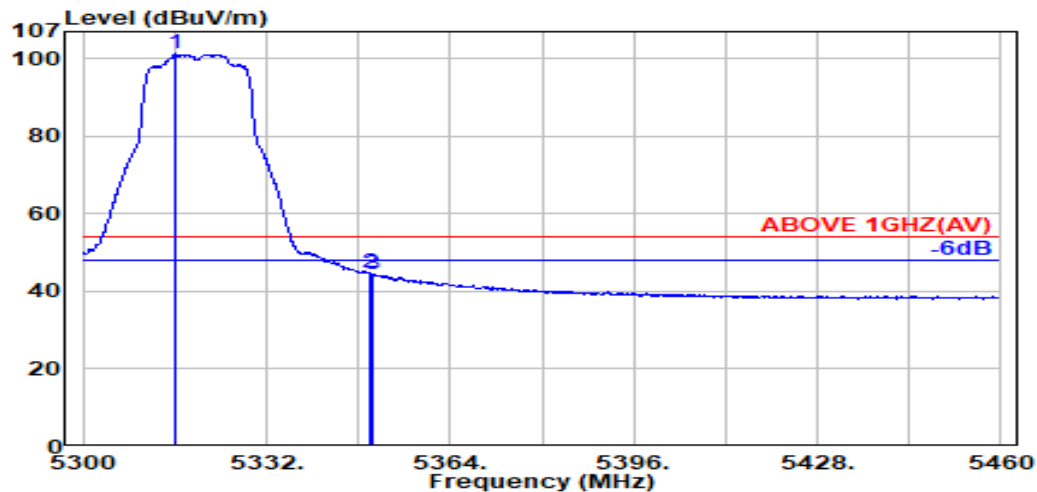

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.900	34.04	8.64	34.23	92.74	101.20	---	---	Average
5350.000	33.90	8.67	34.22	36.49	44.84	54.00	9.16	Average
5350.500	33.90	8.67	34.22	36.18	44.53	54.00	9.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

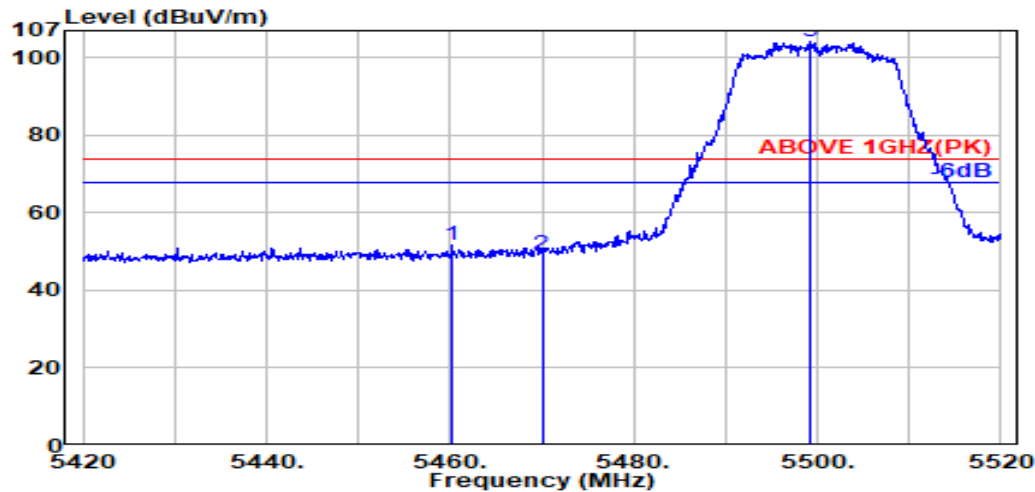

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5460.200	34.18	8.73	34.18	42.81	51.54	74.00	22.46	Peak
5470.000	34.16	8.74	34.18	40.74	49.46	74.00	24.54	Peak
@ 5499.100	34.10	8.75	34.17	95.39	104.07	---	---	Peak

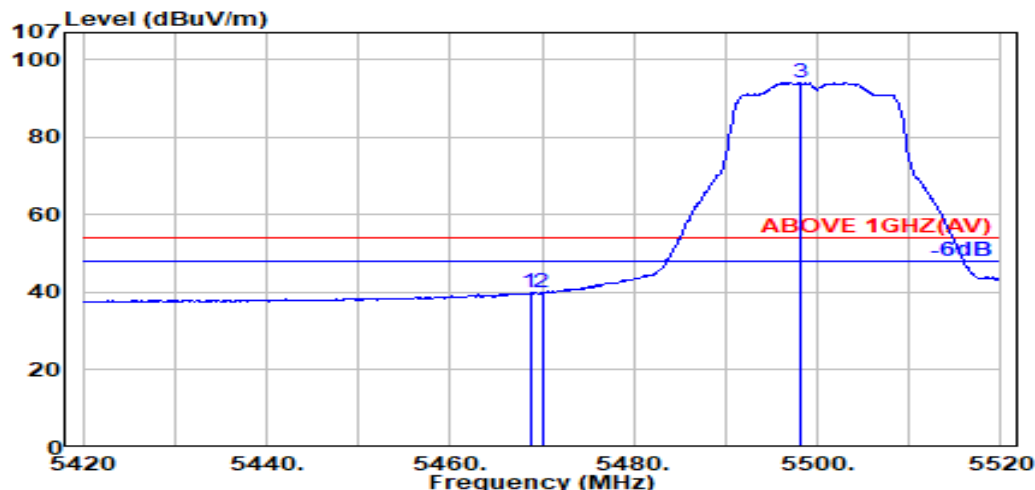

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	31.11	39.82	54.00	14.18	Average
5470.000	34.16	8.74	34.18	31.26	39.98	54.00	14.02	Average
@ 5498.100	34.10	8.75	34.17	85.44	94.13	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

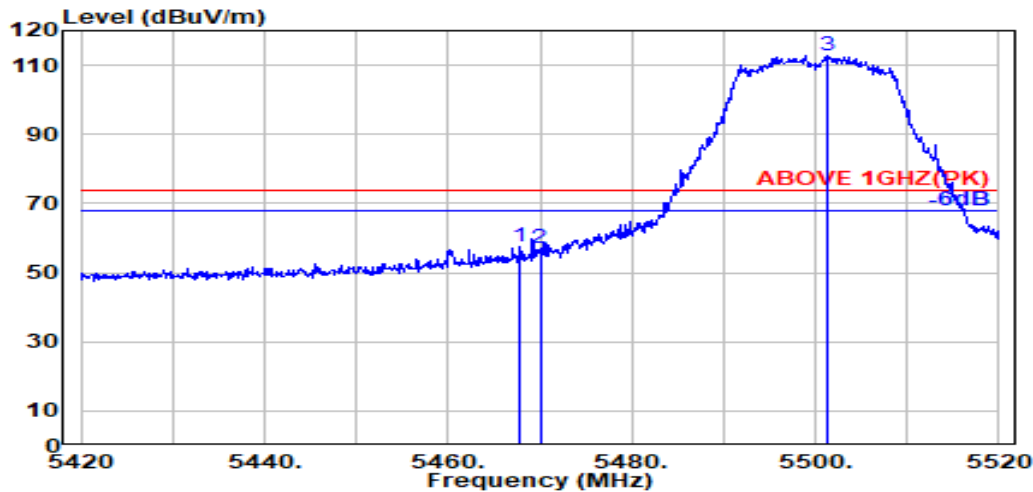

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.16	8.73	34.18	48.80	57.52	74.00	16.48	Peak
5470.000	34.16	8.74	34.18	48.42	57.14	74.00	16.86	Peak
@ 5501.400	34.10	8.75	34.17	104.16	112.85	---	---	Peak

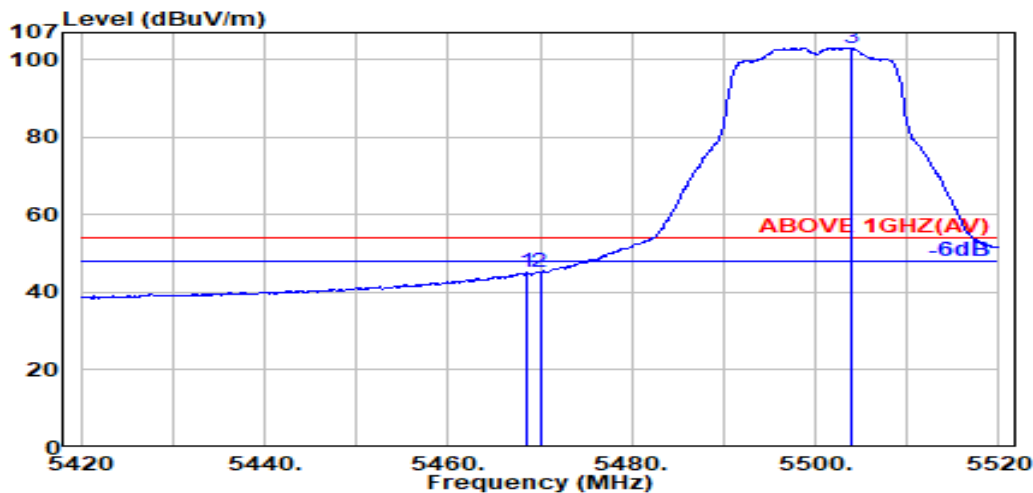

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	36.56	45.28	54.00	8.72	Average
5470.000	34.16	8.74	34.18	36.52	45.24	54.00	8.76	Average
@ 5503.900	34.10	8.76	34.17	94.42	103.11	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

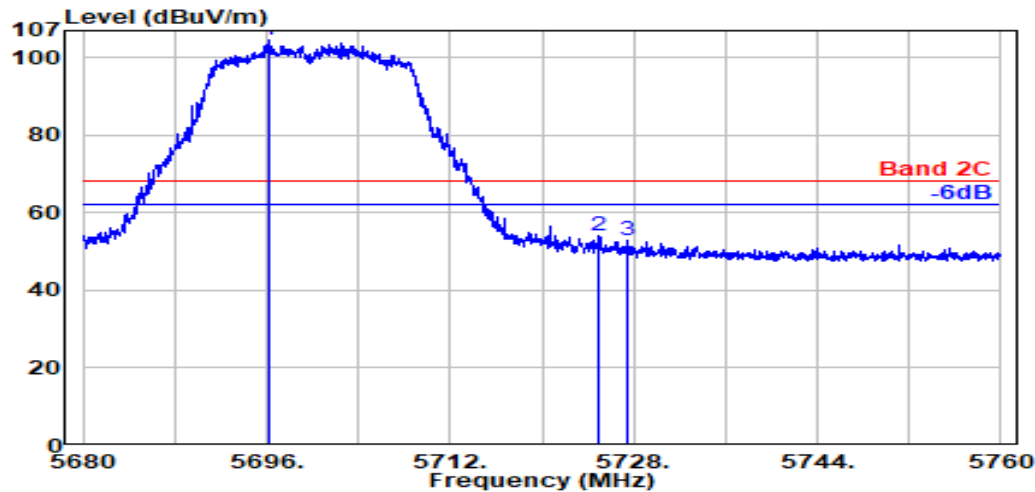

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.250	33.81	8.86	34.26	96.16	104.58	---	---	Peak
5725.000	33.80	8.88	34.28	45.76	54.17	68.20	14.03	Peak
5727.400	33.80	8.88	34.28	44.48	52.89	68.20	15.31	Peak

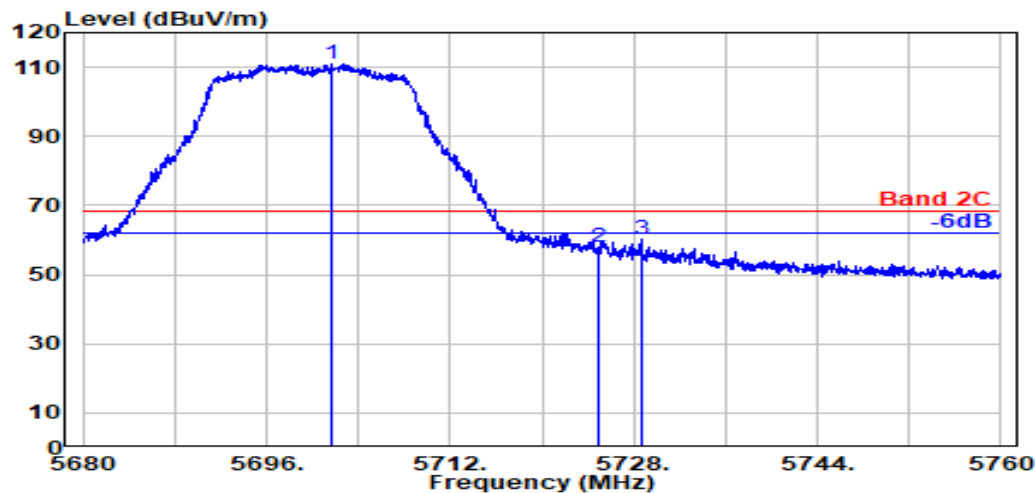

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.600	33.80	8.87	34.27	102.45	110.86	---	---	Peak
5725.000	33.80	8.88	34.28	49.58	57.98	68.20	10.22	Peak
5728.700	33.80	8.88	34.28	51.83	60.24	68.20	7.96	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

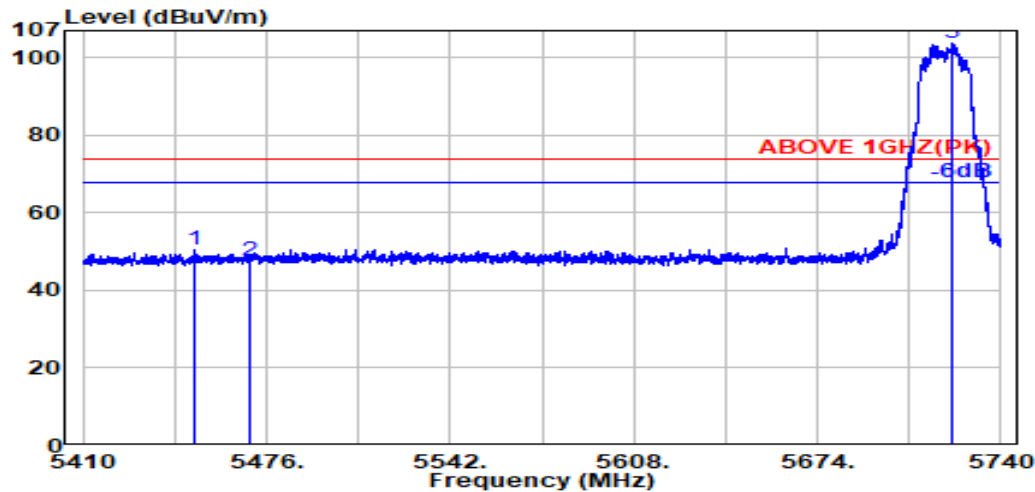

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.500	34.20	8.72	34.19	41.59	50.32	74.00	23.68	Peak
5470.000	34.16	8.74	34.18	38.75	47.47	74.00	26.53	Peak
@ 5722.300	33.80	8.88	34.27	95.47	103.87	---	---	Peak

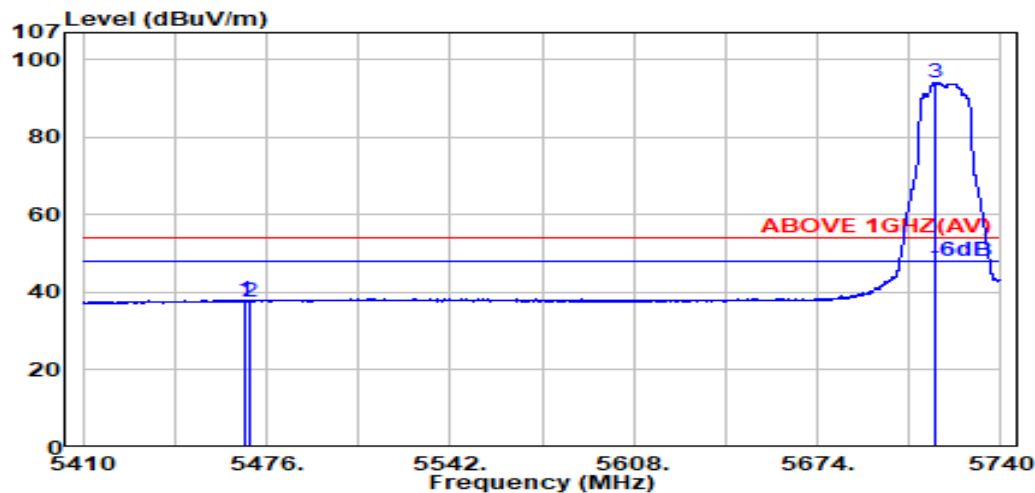

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.16	8.73	34.18	29.29	38.01	54.00	15.99	Average
5470.000	34.16	8.74	34.18	29.01	37.72	54.00	16.28	Average
@ 5716.700	33.80	8.88	34.27	85.76	94.17	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

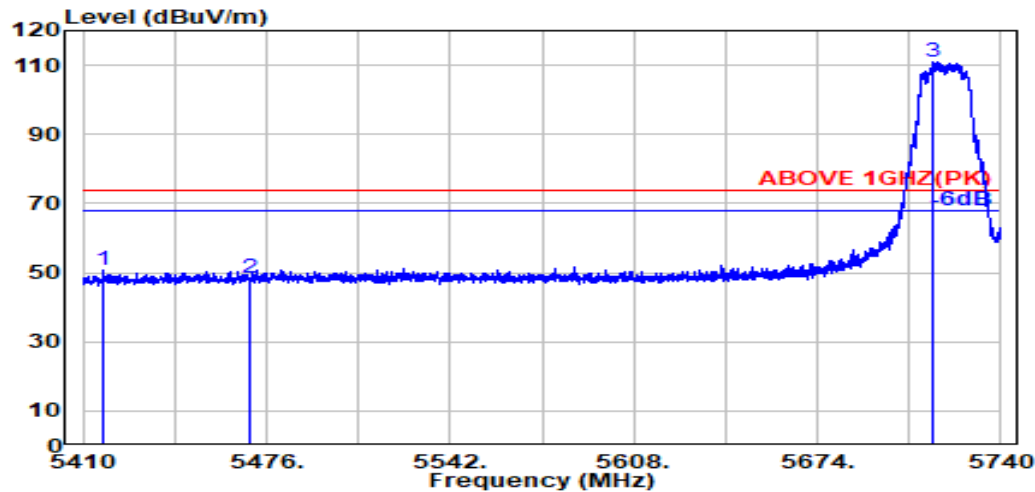

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.300	34.13	8.71	34.20	41.90	50.54	74.00	23.46	Peak
5470.000	34.16	8.74	34.18	39.63	48.35	74.00	25.65	Peak
@ 5715.700	33.80	8.88	34.27	102.36	110.76	---	---	Peak

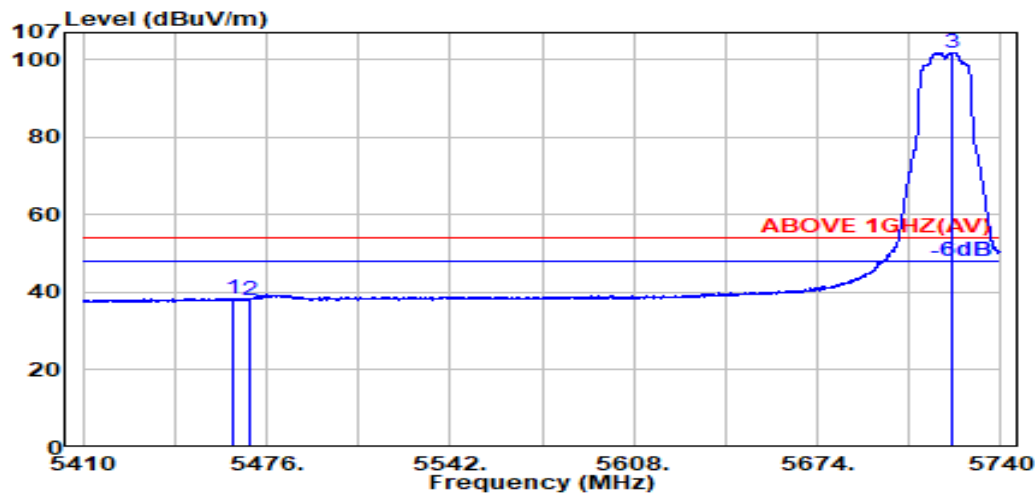

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.900	34.17	8.73	34.18	29.80	38.52	54.00	15.48	Average
5470.000	34.16	8.74	34.18	29.39	38.10	54.00	15.90	Average
@ 5722.500	33.80	8.88	34.27	93.51	101.92	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

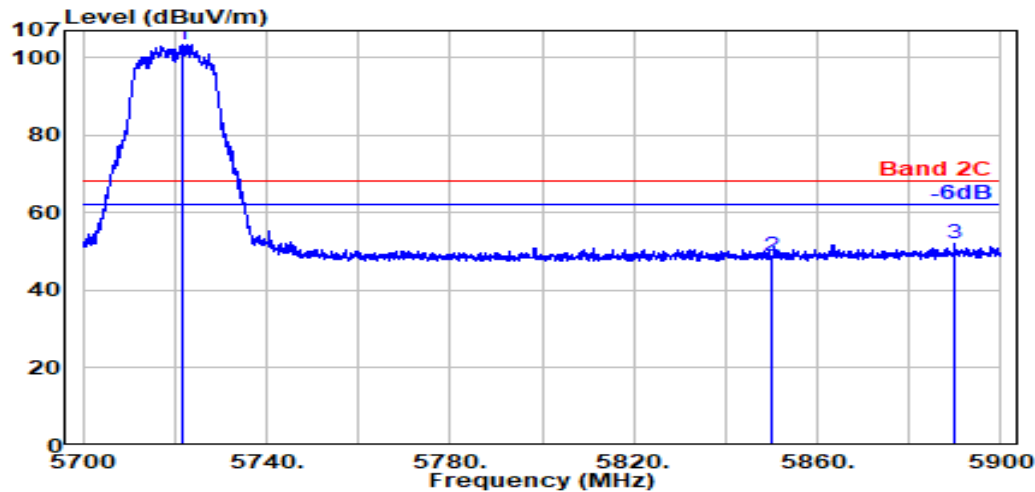

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.500	33.80	8.88	34.27	95.08	103.49	---	---	Peak
5850.000	34.10	8.95	34.33	40.29	49.00	68.20	19.20	Peak
5889.900	34.10	8.97	34.35	43.28	52.00	68.20	16.20	Peak

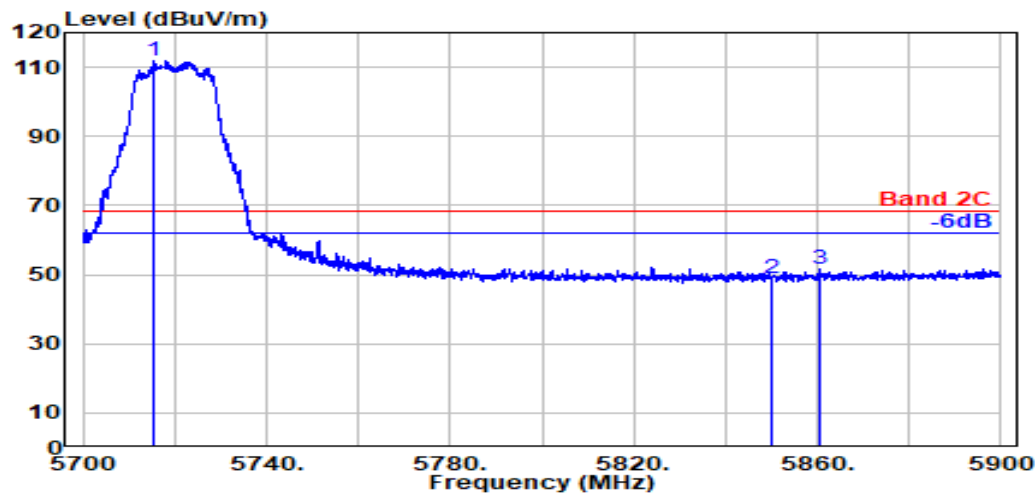

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.500	33.80	8.88	34.27	103.43	111.83	---	---	Peak
5850.000	34.10	8.95	34.33	40.18	48.90	68.20	19.30	Peak
5860.300	34.10	8.96	34.34	42.96	51.68	68.20	16.52	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

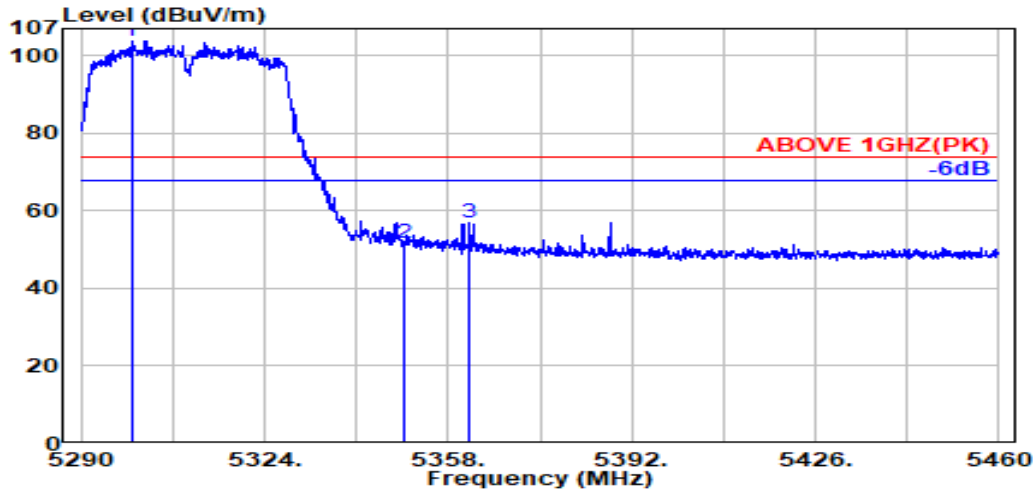

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.300	34.10	8.63	34.23	95.22	103.72	---	---	Peak
5350.000	33.90	8.67	34.22	43.24	51.59	74.00	22.41	Peak
5362.000	33.95	8.67	34.21	48.66	57.07	74.00	16.93	Peak

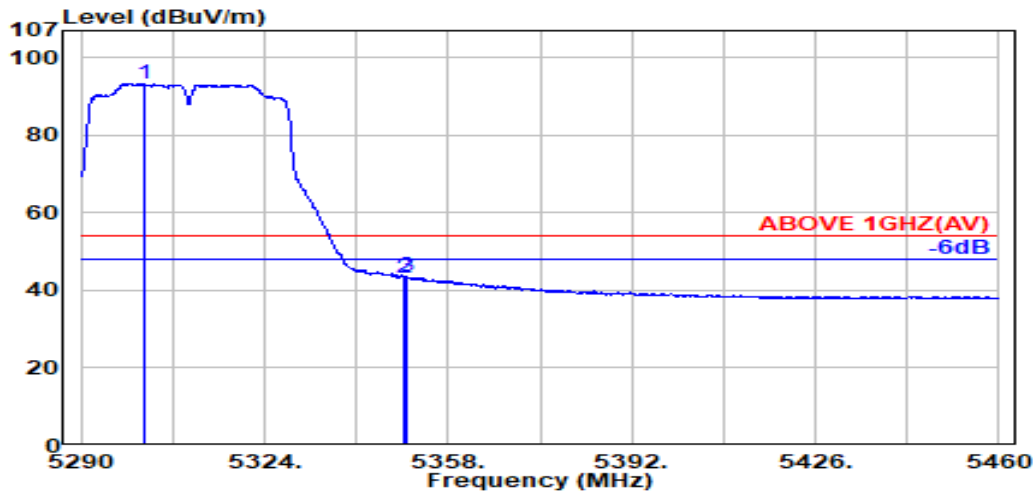

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.600	34.09	8.64	34.23	84.85	93.35	---	---	Average
5350.000	33.90	8.67	34.22	34.95	43.30	54.00	10.70	Average
5350.400	33.90	8.67	34.22	35.21	43.56	54.00	10.44	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

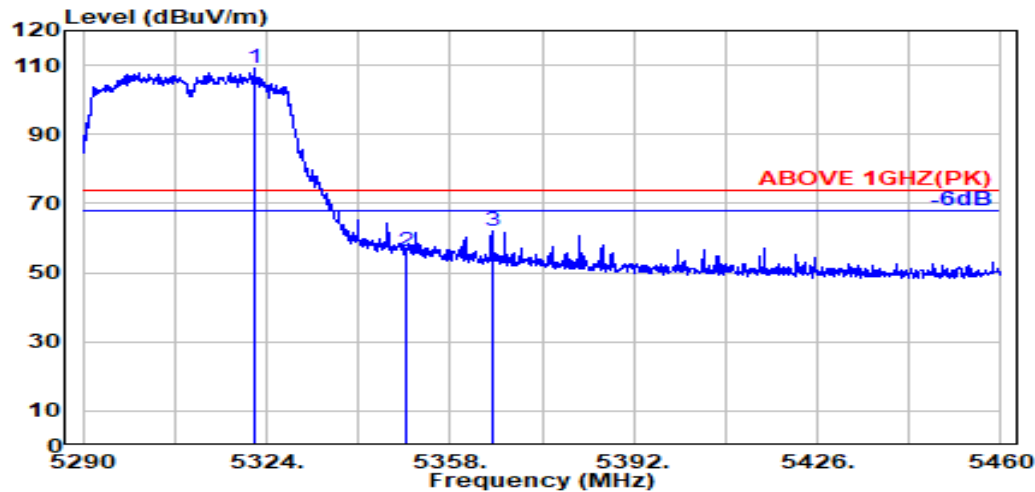

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	34.01	8.65	34.23	100.75	109.18	---	---	Peak
5350.000	33.90	8.67	34.22	47.70	56.05	74.00	17.95	Peak
5365.700	33.96	8.67	34.21	53.81	62.24	74.00	11.76	Peak

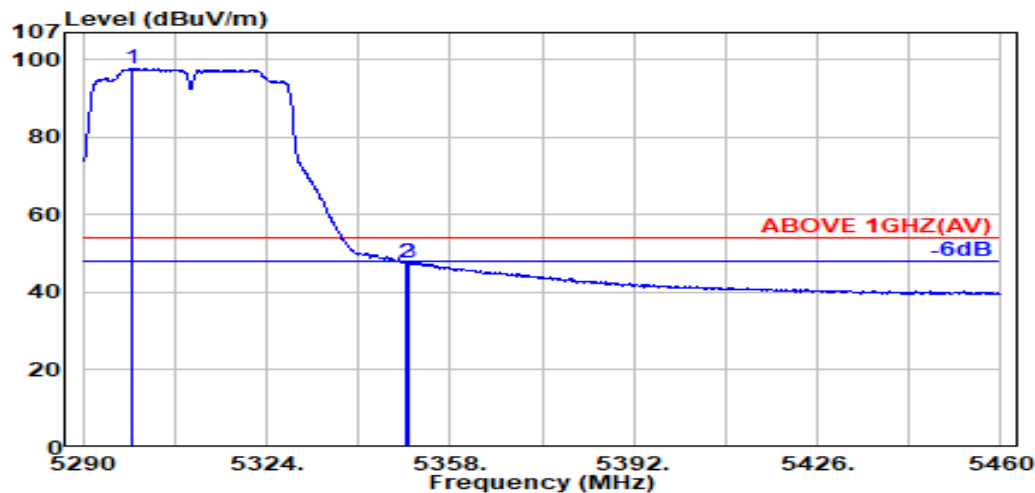

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.200	34.10	8.63	34.23	89.35	97.84	---	---	Average
5350.000	33.90	8.67	34.22	39.42	47.77	54.00	6.23	Average
5350.400	33.90	8.67	34.22	39.35	47.70	54.00	6.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

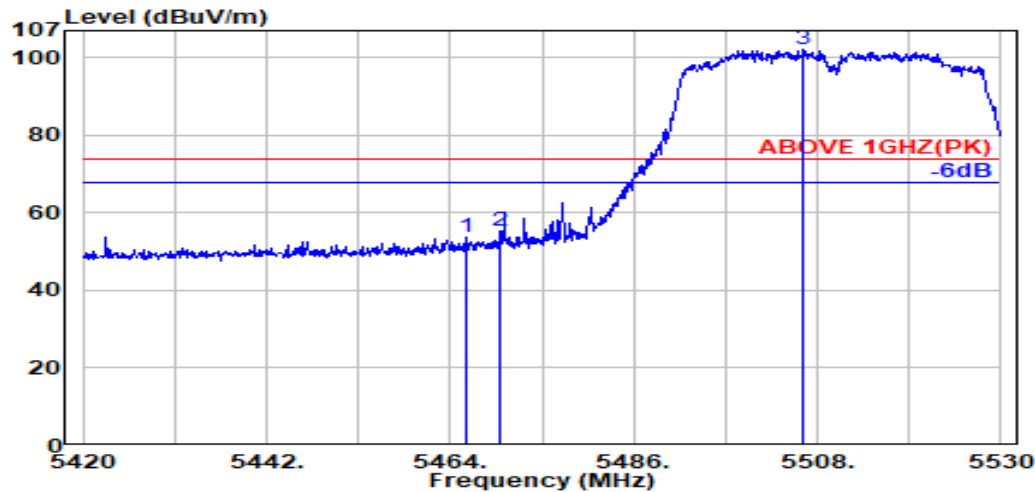

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.900	34.17	8.73	34.18	45.14	53.86	74.00	20.14	Peak
5470.000	34.16	8.74	34.18	46.43	55.15	74.00	18.85	Peak
@ 5506.400	34.10	8.76	34.17	93.29	101.98	---	---	Peak

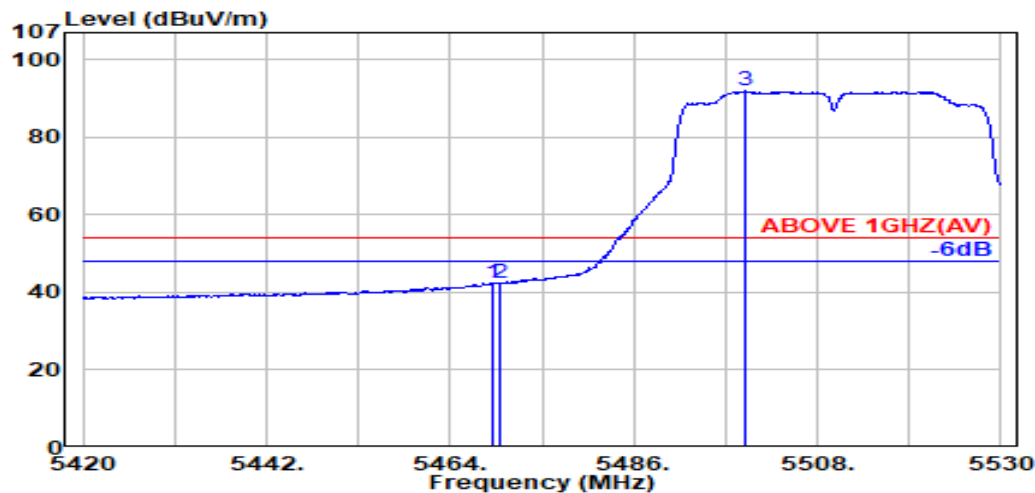

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	33.63	42.34	54.00	11.66	Average
5470.000	34.16	8.74	34.18	33.55	42.27	54.00	11.73	Average
@ 5499.400	34.10	8.75	34.17	83.25	91.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

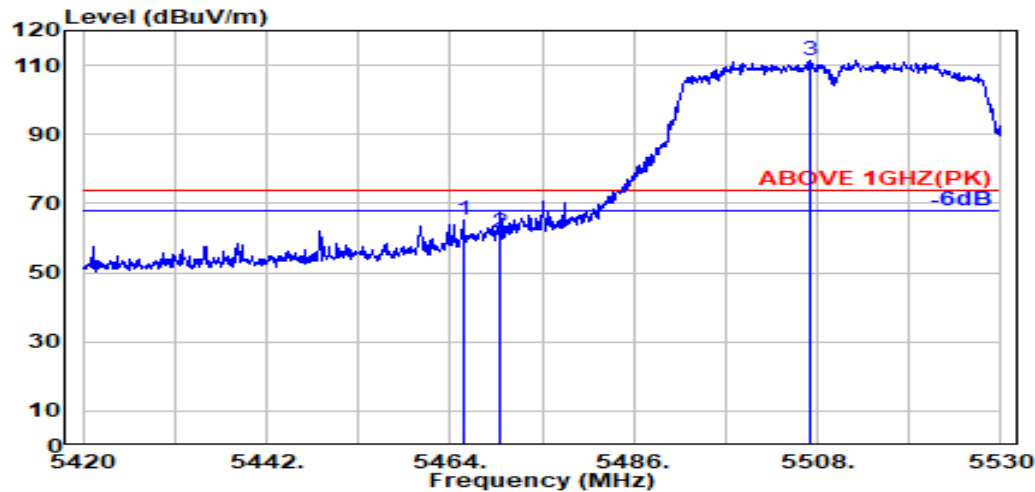

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.17	8.73	34.18	56.26	64.99	74.00	9.01	Peak
5470.000	34.16	8.74	34.18	53.01	61.73	74.00	12.27	Peak
@ 5507.000	34.10	8.76	34.17	102.70	111.38	---	---	Peak

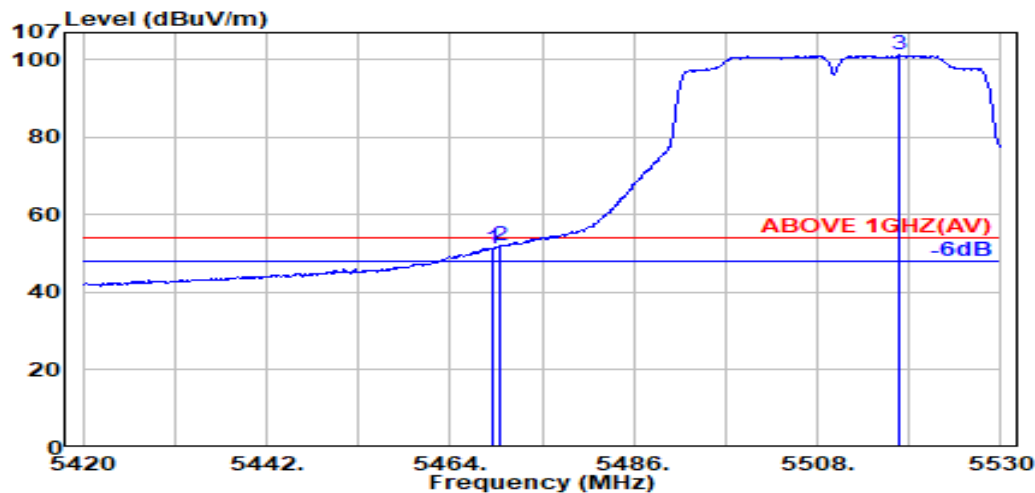

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	42.69	51.41	54.00	2.59	Average
5470.000	34.16	8.74	34.18	43.50	52.22	54.00	1.78	Average
@ 5517.700	34.10	8.76	34.18	92.48	101.16	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

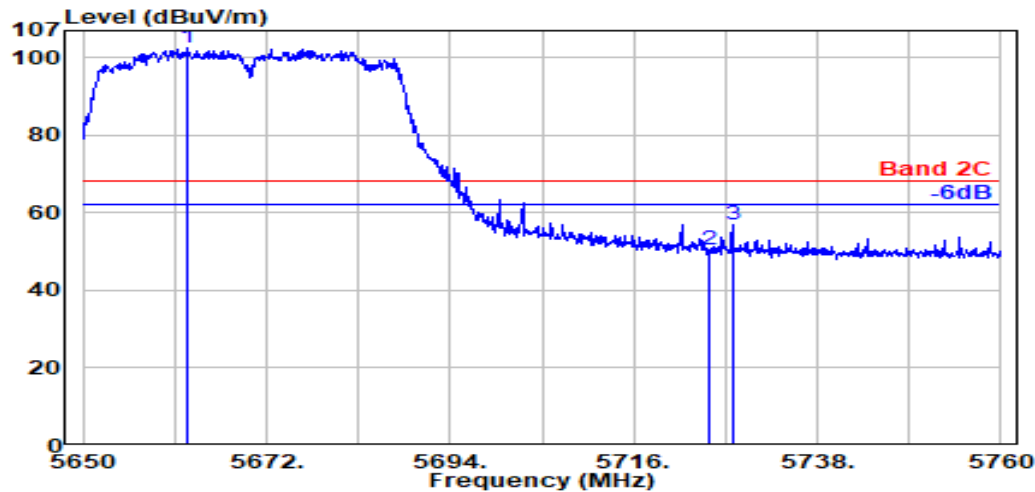

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.400	33.95	8.85	34.25	93.91	102.46	---	---	Peak
5725.000	33.80	8.88	34.28	41.99	50.39	68.20	17.81	Peak
5727.800	33.80	8.88	34.28	48.46	56.86	68.20	11.34	Peak

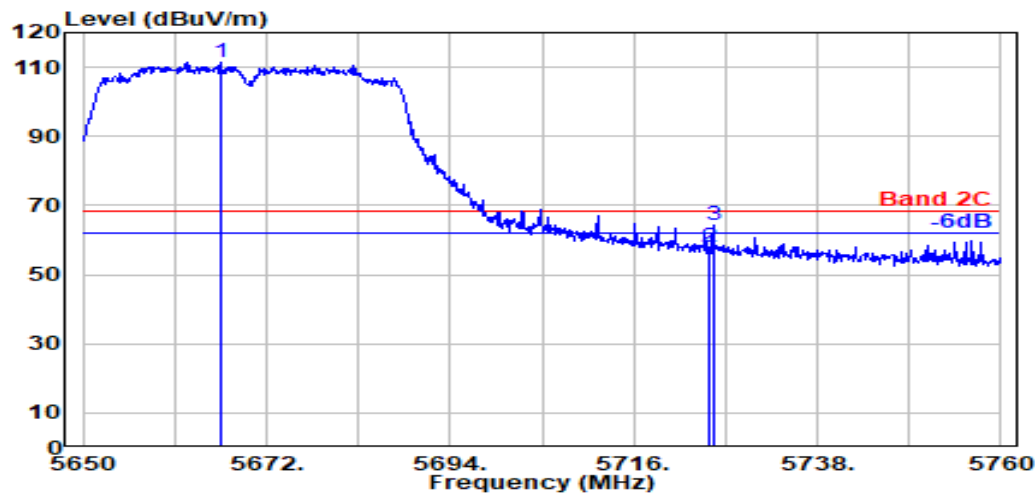

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5666.400	33.93	8.85	34.25	102.89	111.42	---	---	Peak
5725.000	33.80	8.88	34.28	49.73	58.14	68.20	10.06	Peak
5725.600	33.80	8.88	34.28	55.86	64.26	68.20	3.94	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

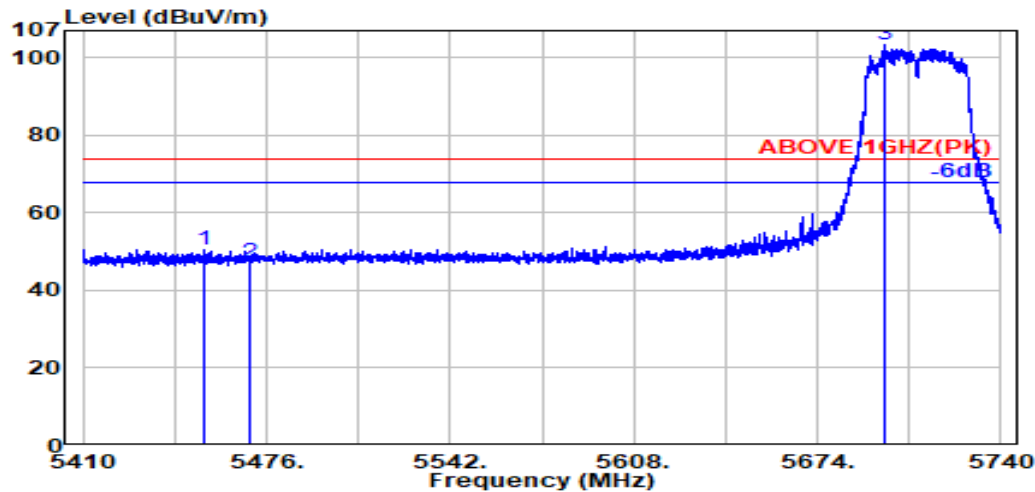

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.600	34.19	8.73	34.18	41.71	50.45	74.00	23.55	Peak
5470.000	34.16	8.74	34.18	38.68	47.39	74.00	26.61	Peak
@ 5698.200	33.81	8.87	34.26	94.82	103.23	---	---	Peak

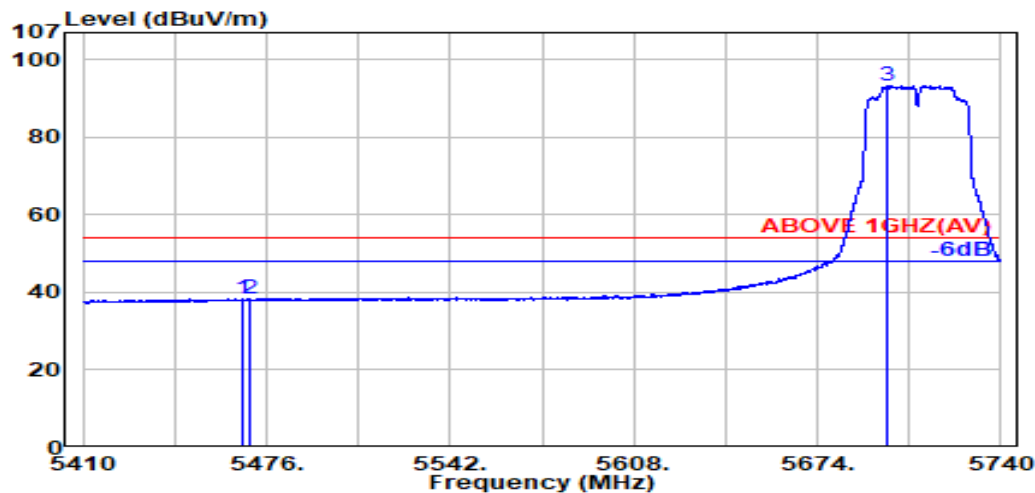

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.16	8.73	34.18	29.60	38.31	54.00	15.69	Average
5470.000	34.16	8.74	34.18	29.78	38.49	54.00	15.51	Average
@ 5699.000	33.80	8.87	34.26	84.87	93.27	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

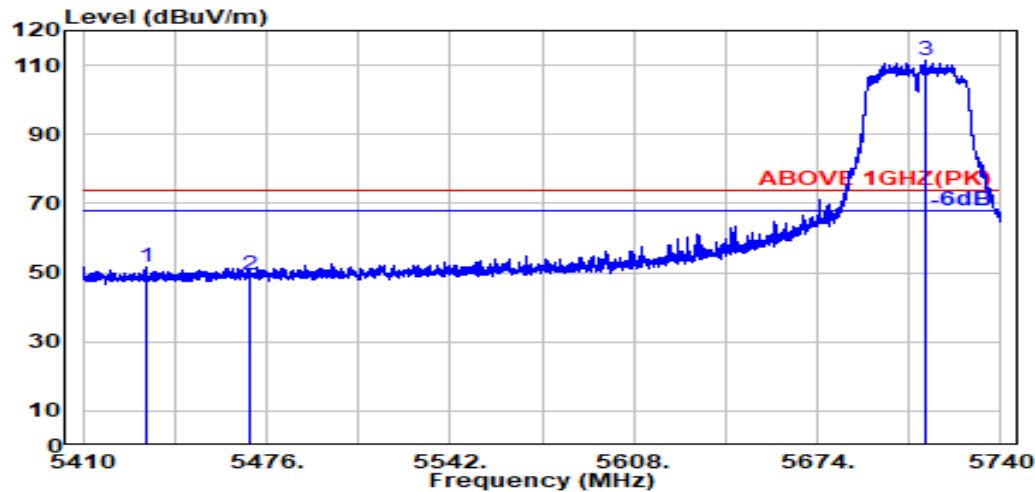

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.500	34.17	8.71	34.19	42.81	51.50	74.00	22.50	Peak
5470.000	34.16	8.74	34.18	40.53	49.24	74.00	24.76	Peak
@ 5712.600	33.80	8.87	34.27	102.91	111.31	---	---	Peak

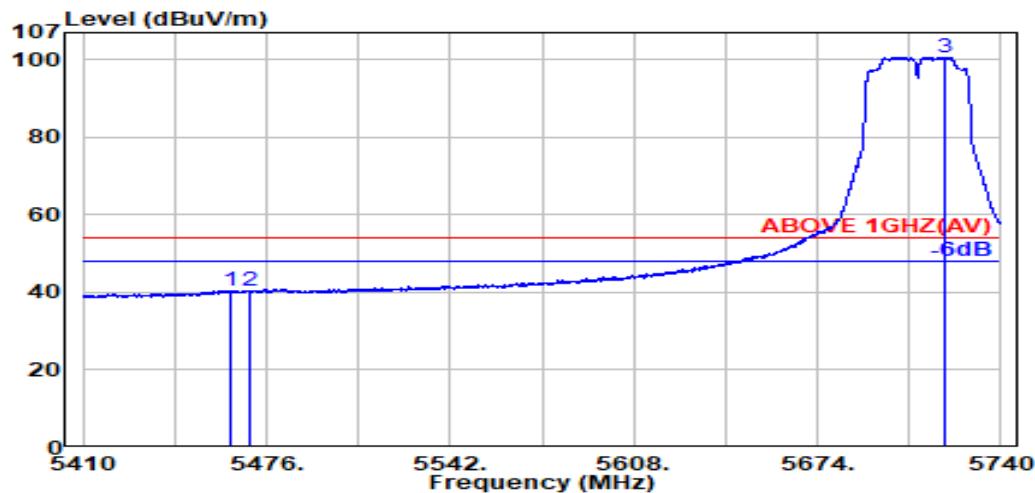

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.17	8.73	34.18	31.70	40.43	54.00	13.57	Average
5470.000	34.16	8.74	34.18	31.47	40.18	54.00	13.82	Average
@ 5720.000	33.80	8.88	34.27	92.19	100.59	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

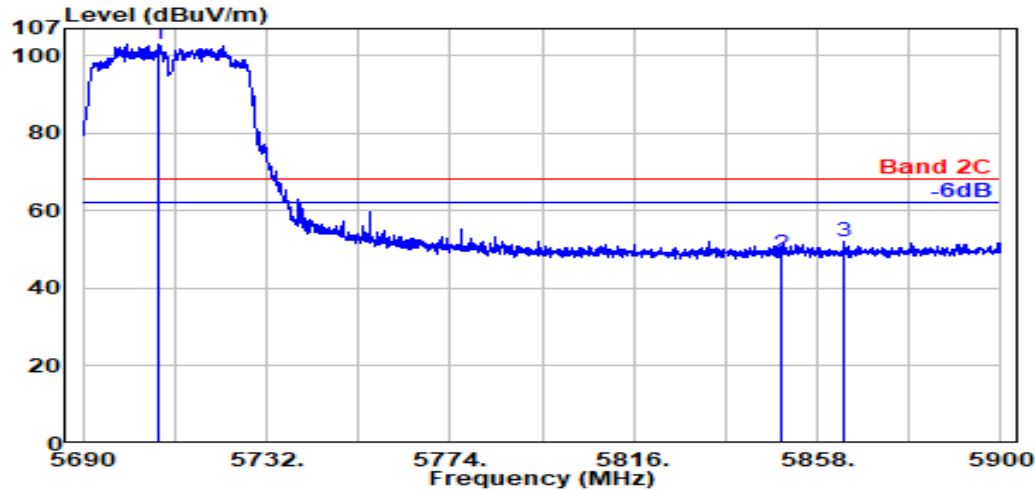

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.100	33.80	8.87	34.27	94.42	102.83	---	---	Peak
5850.000	34.10	8.95	34.33	39.94	48.66	68.20	19.54	Peak
5864.000	34.10	8.96	34.34	43.19	51.91	68.20	16.29	Peak

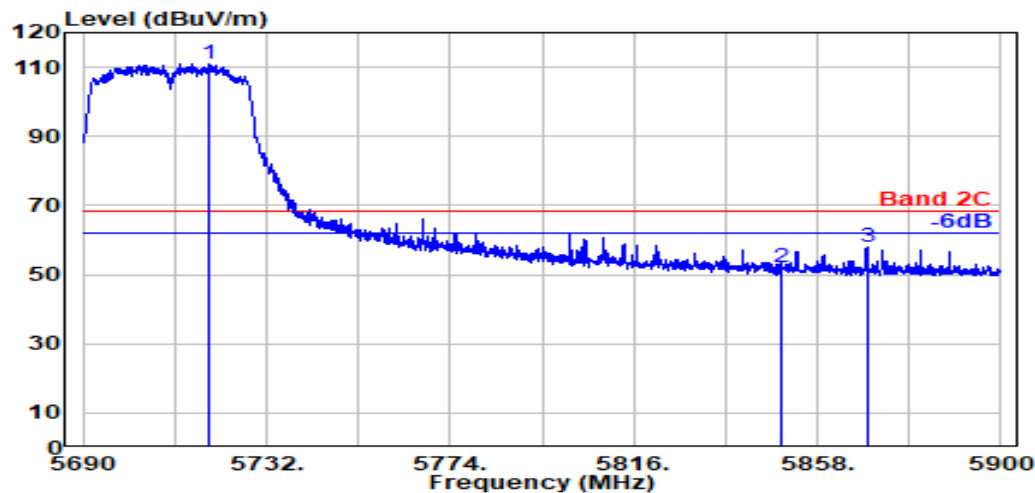

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.000	33.80	8.88	34.27	102.70	111.11	---	---	Peak
5850.000	34.10	8.95	34.33	43.38	52.10	68.20	16.10	Peak
5869.300	34.10	8.96	34.34	49.32	58.04	68.20	10.16	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

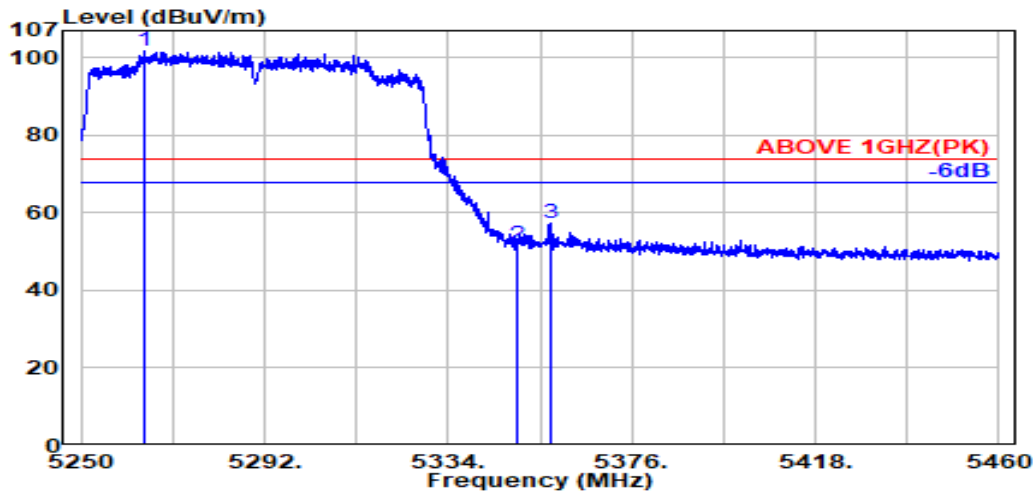

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5264.500	33.89	8.61	34.24	93.31	101.57	---	---	Peak
5350.000	33.90	8.67	34.22	43.47	51.82	74.00	22.18	Peak
5357.300	33.93	8.67	34.21	49.12	57.51	74.00	16.49	Peak

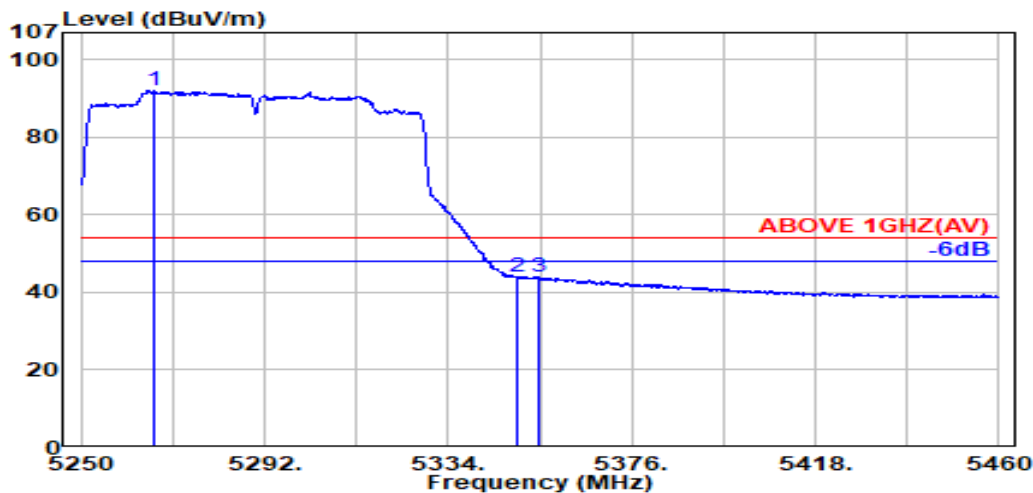

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.600	33.90	8.62	34.24	83.62	91.89	---	---	Average
5350.000	33.90	8.67	34.22	35.49	43.84	54.00	10.16	Average
5354.600	33.92	8.67	34.21	35.75	44.12	54.00	9.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

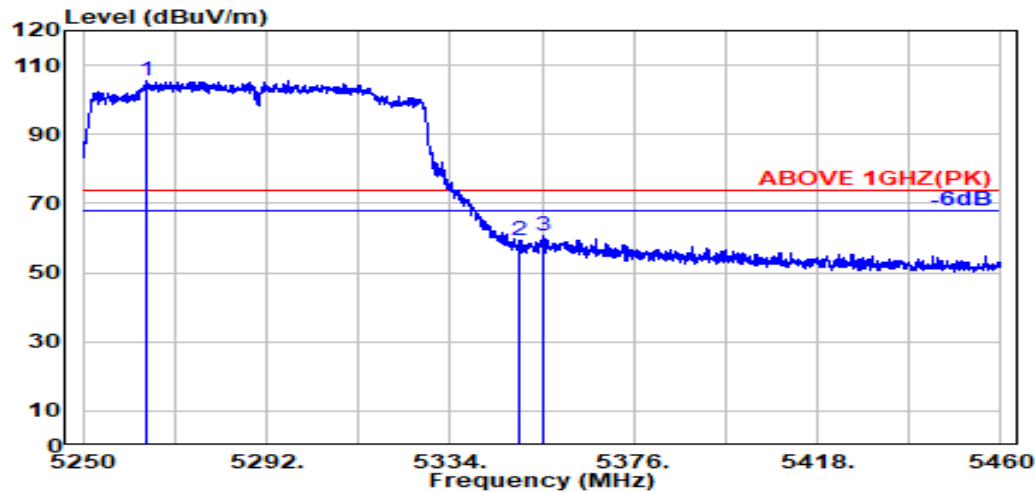

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5264.700	33.89	8.61	34.24	97.39	105.65	---	---	Peak
5350.000	33.90	8.67	34.22	50.85	59.20	74.00	14.80	Peak
5355.300	33.92	8.67	34.21	52.29	60.66	74.00	13.34	Peak

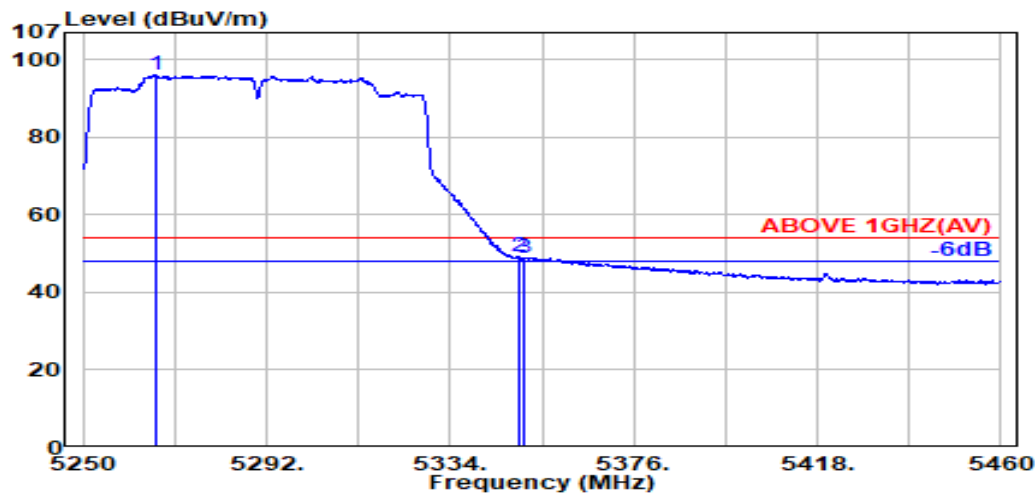

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.500	33.90	8.62	34.24	87.71	95.98	---	---	Average
5350.000	33.90	8.67	34.22	40.87	49.22	54.00	4.78	Average
5350.800	33.90	8.67	34.22	40.67	49.03	54.00	4.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

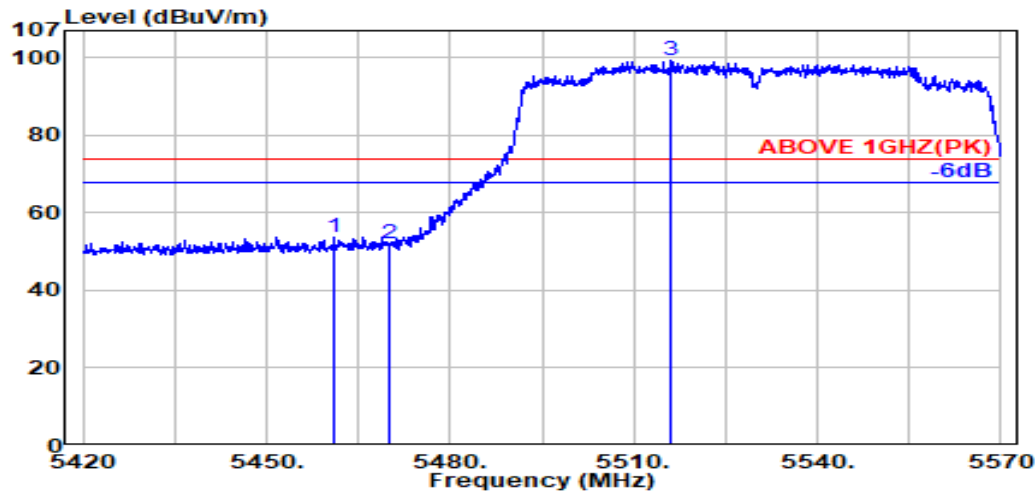

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.18	8.73	34.18	45.12	53.85	74.00	20.15	Peak
5470.000	34.16	8.74	34.18	43.29	52.00	74.00	22.00	Peak
@ 5516.100	34.10	8.76	34.18	90.45	99.14	---	---	Peak

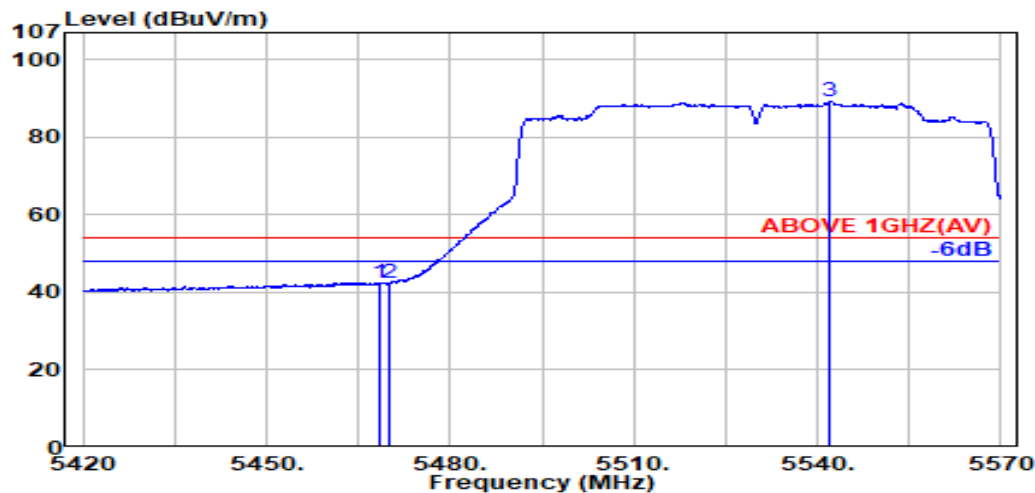

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	33.85	42.57	54.00	11.43	Average
5470.000	34.16	8.74	34.18	33.57	42.29	54.00	11.71	Average
@ 5542.000	34.10	8.78	34.19	80.54	89.23	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

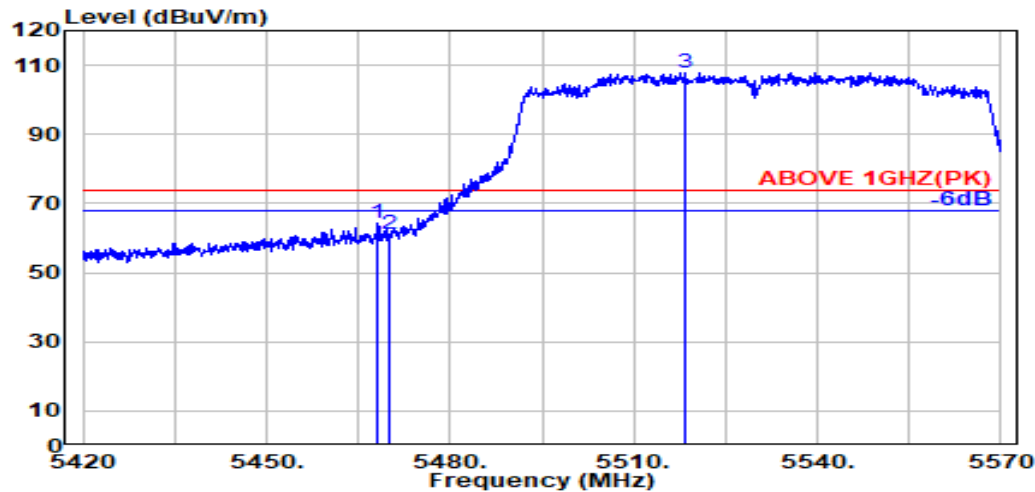

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	55.53	64.25	74.00	9.75	Peak
5470.000	34.16	8.74	34.18	52.24	60.95	74.00	13.05	Peak
@ 5518.300	34.10	8.76	34.18	99.29	107.97	---	---	Peak

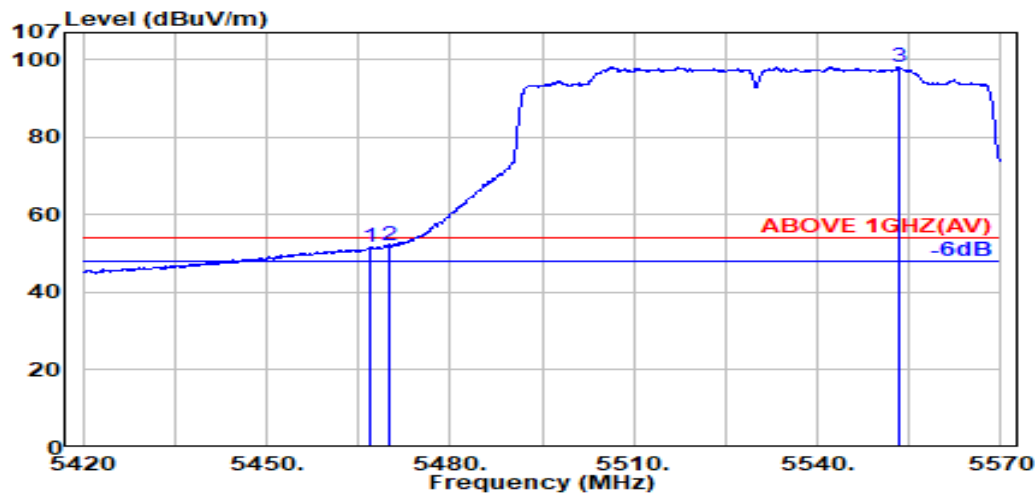

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.17	8.73	34.18	42.95	51.67	54.00	2.33	Average
5470.000	34.16	8.74	34.18	43.38	52.10	54.00	1.90	Average
@ 5553.300	34.09	8.78	34.20	89.38	98.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

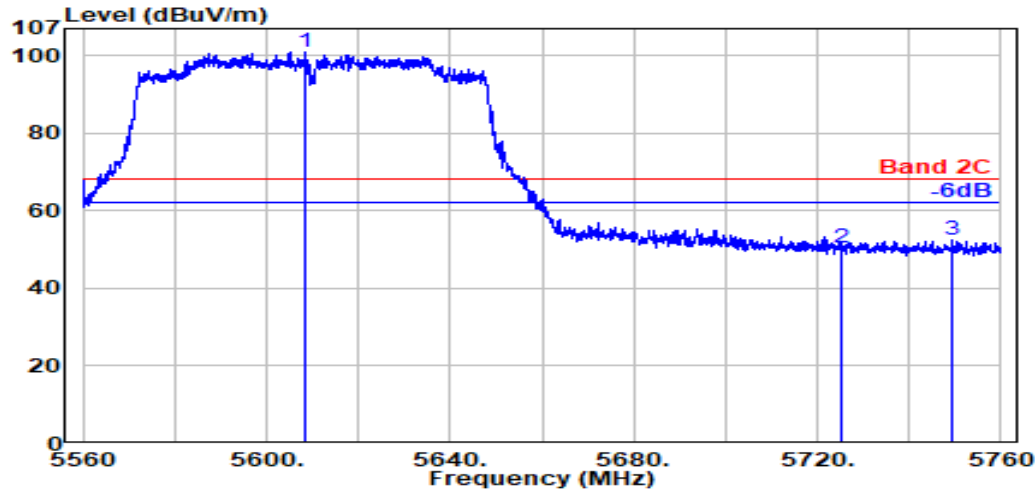

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5608.200	34.00	8.82	34.22	92.52	101.12	---	---	Peak
5725.000	33.80	8.88	34.28	42.25	50.66	68.20	17.54	Peak
5749.300	33.80	8.89	34.29	44.05	52.46	68.20	15.74	Peak

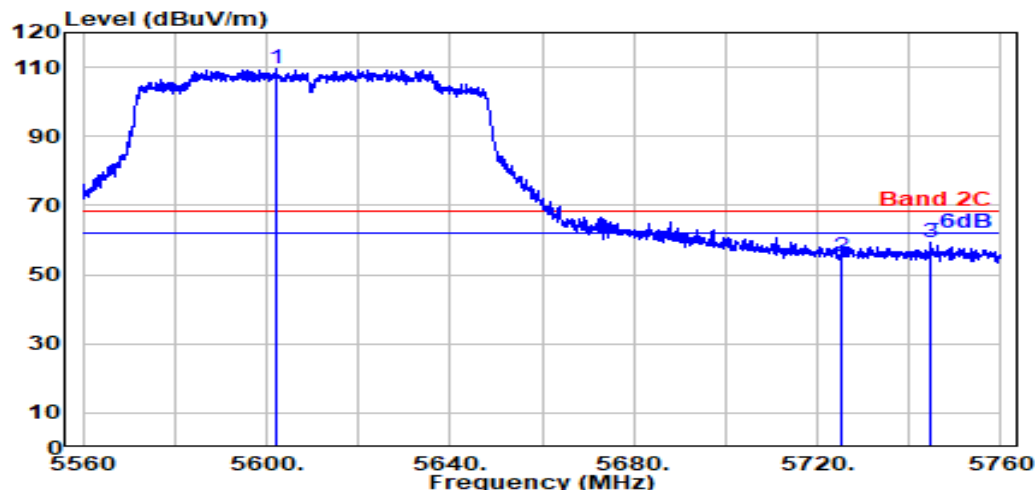

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5602.100	34.00	8.81	34.22	100.77	109.36	---	---	Peak
5725.000	33.80	8.88	34.28	46.84	55.25	68.20	12.95	Peak
5744.800	33.80	8.89	34.29	50.79	59.20	68.20	9.00	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

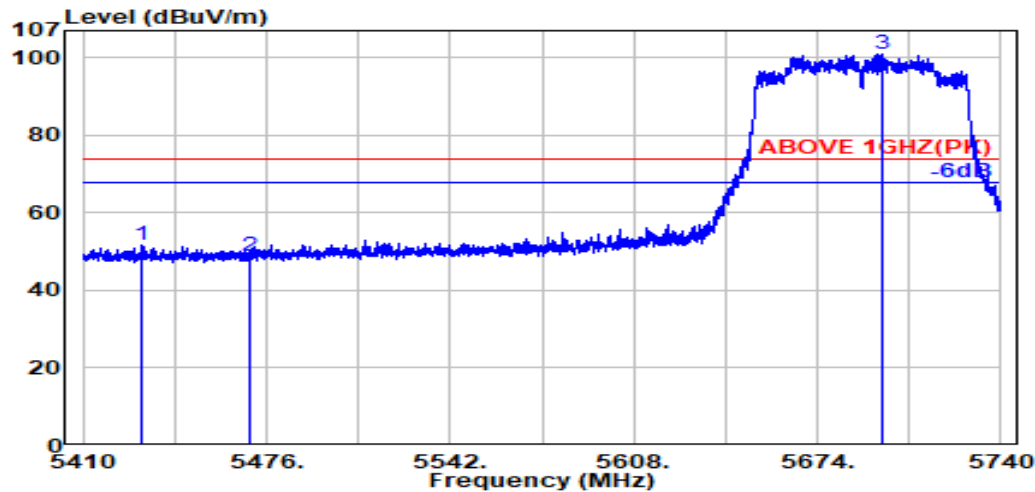

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.400	34.16	8.71	34.19	42.97	51.66	74.00	22.34	Peak
5470.000	34.16	8.74	34.18	40.17	48.88	74.00	25.12	Peak
@ 5697.200	33.81	8.87	34.26	92.47	100.89	---	---	Peak

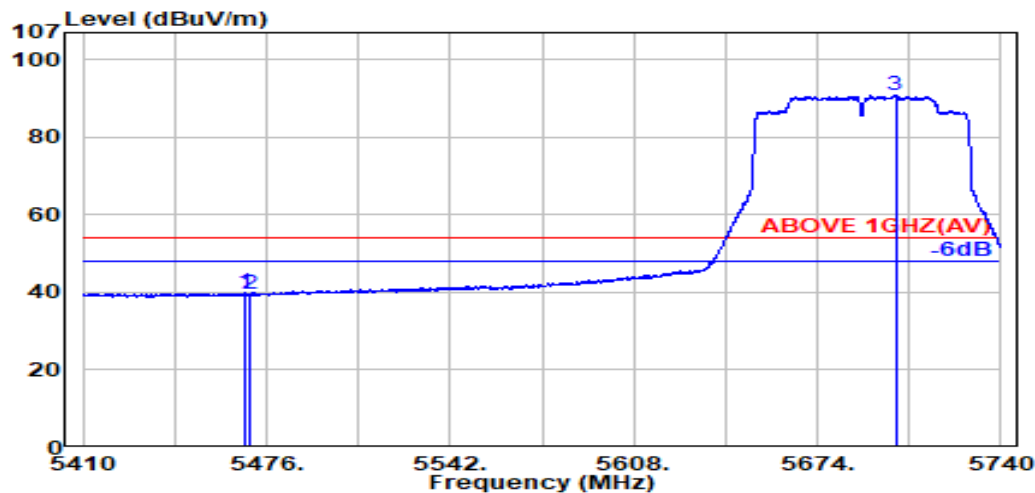

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	31.13	39.85	54.00	14.15	Average
5470.000	34.16	8.74	34.18	30.70	39.42	54.00	14.58	Average
@ 5702.100	33.80	8.87	34.27	82.61	91.01	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

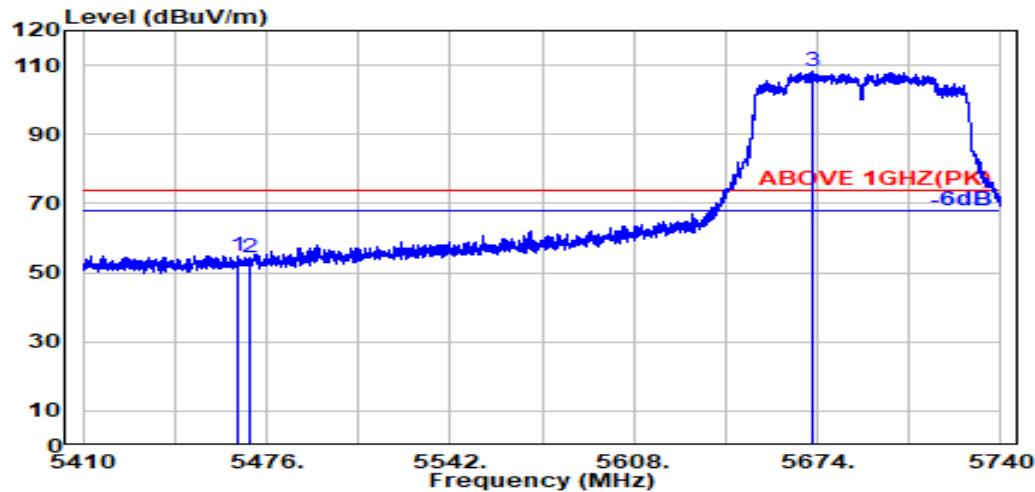

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.17	8.73	34.18	46.19	54.91	74.00	19.09	Peak
5470.000	34.16	8.74	34.18	45.43	54.15	74.00	19.85	Peak
@ 5671.900	33.91	8.85	34.25	99.87	108.38	---	---	Peak

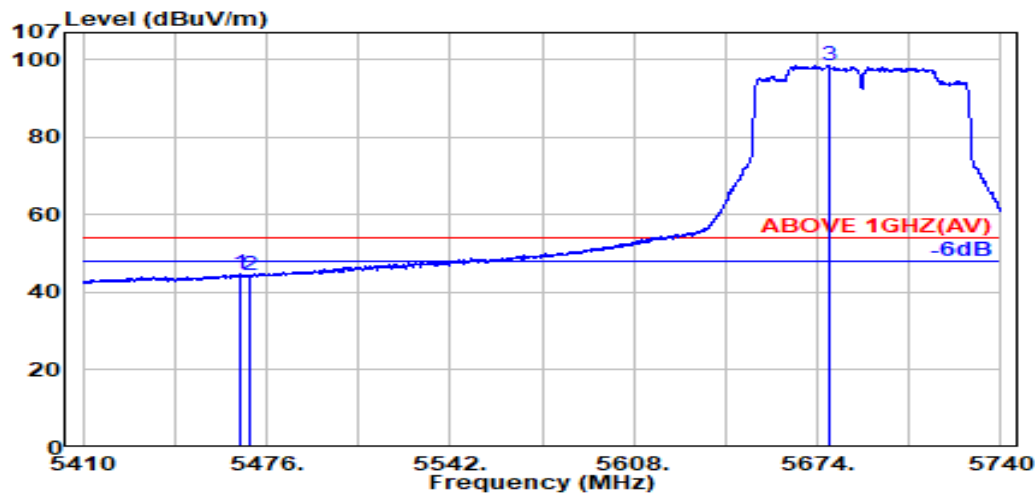

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	35.95	44.67	54.00	9.33	Average
5470.000	34.16	8.74	34.18	35.57	44.29	54.00	9.71	Average
@ 5678.300	33.89	8.85	34.25	90.16	98.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

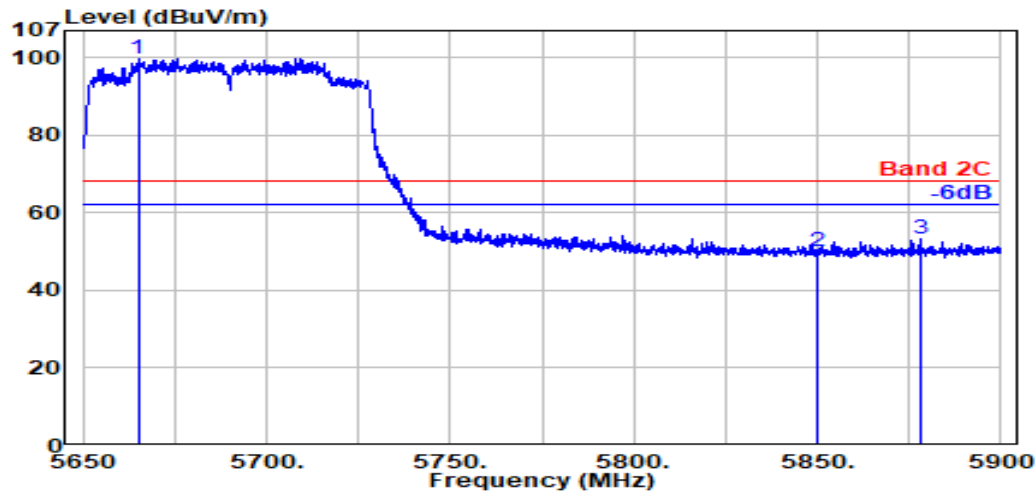

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5665.000	33.94	8.85	34.25	91.26	99.80	---	---	Peak
5850.000	34.10	8.95	34.33	41.30	50.02	68.20	18.18	Peak
5878.100	34.10	8.96	34.35	44.41	53.12	68.20	15.08	Peak

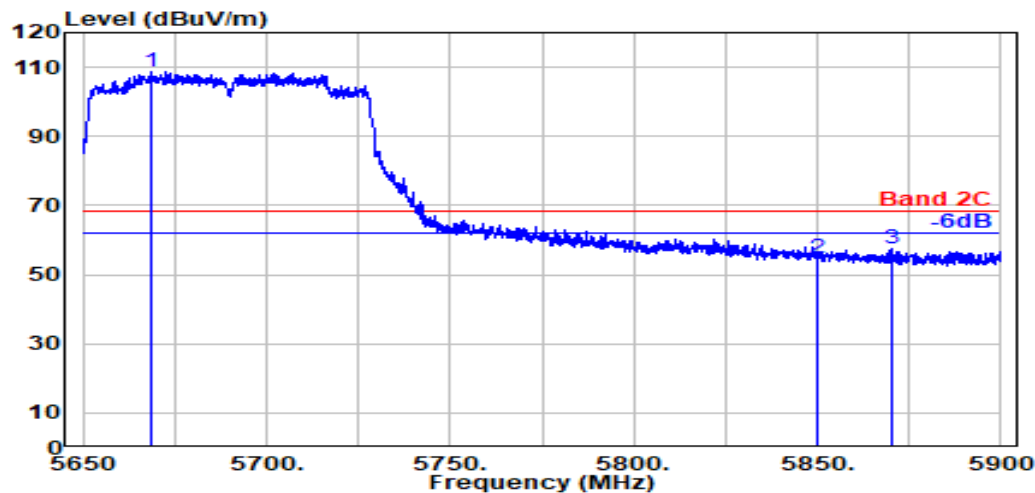

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.400	33.93	8.85	34.25	100.24	108.76	---	---	Peak
5850.000	34.10	8.95	34.33	46.03	54.75	68.20	13.45	Peak
5870.400	34.10	8.96	34.34	48.72	57.44	68.20	10.76	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

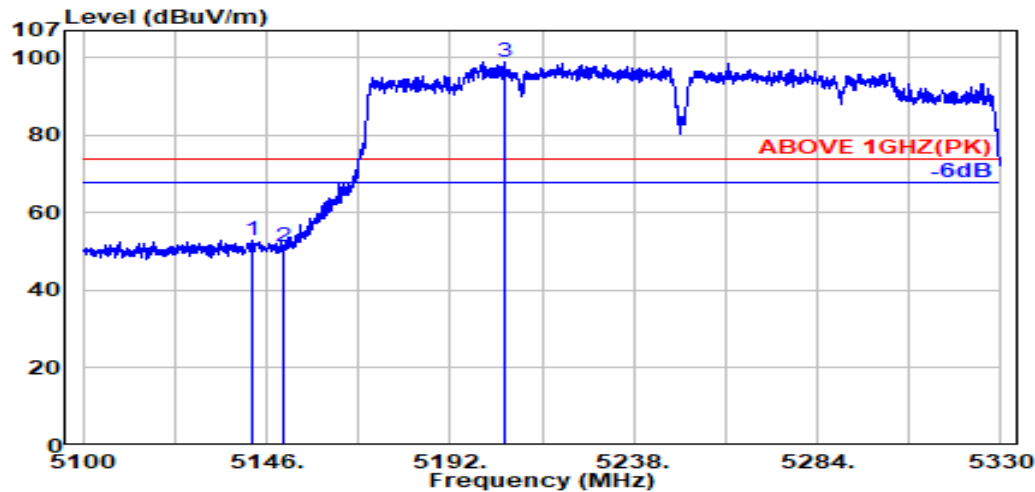

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	33.70	8.54	34.28	44.83	52.79	74.00	21.21	Peak
5150.000	33.70	8.54	34.28	43.37	51.34	74.00	22.66	Peak
@ 5205.700	33.71	8.58	34.26	90.85	98.88	---	---	Peak

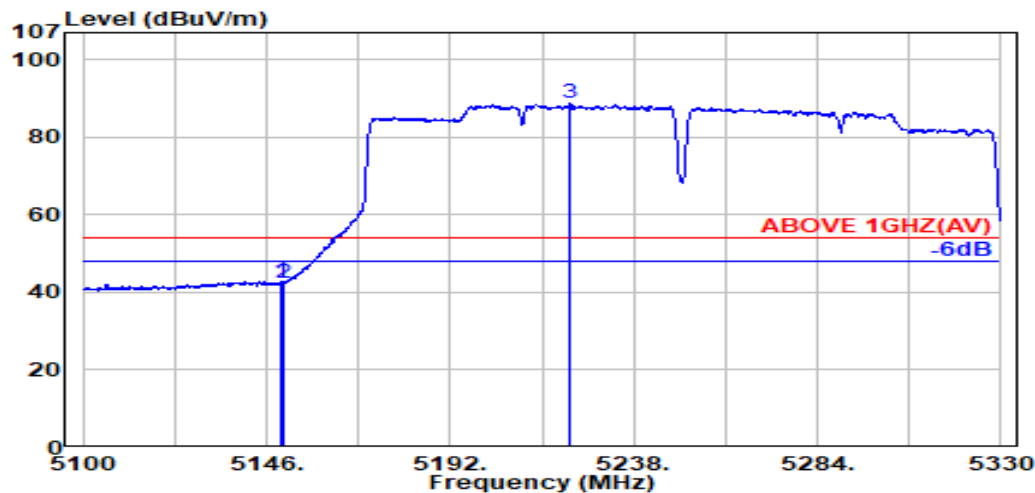

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.54	34.28	34.80	42.76	54.00	11.24	Average
5150.000	33.70	8.54	34.28	34.40	42.37	54.00	11.63	Average
@ 5222.000	33.74	8.59	34.26	80.57	88.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

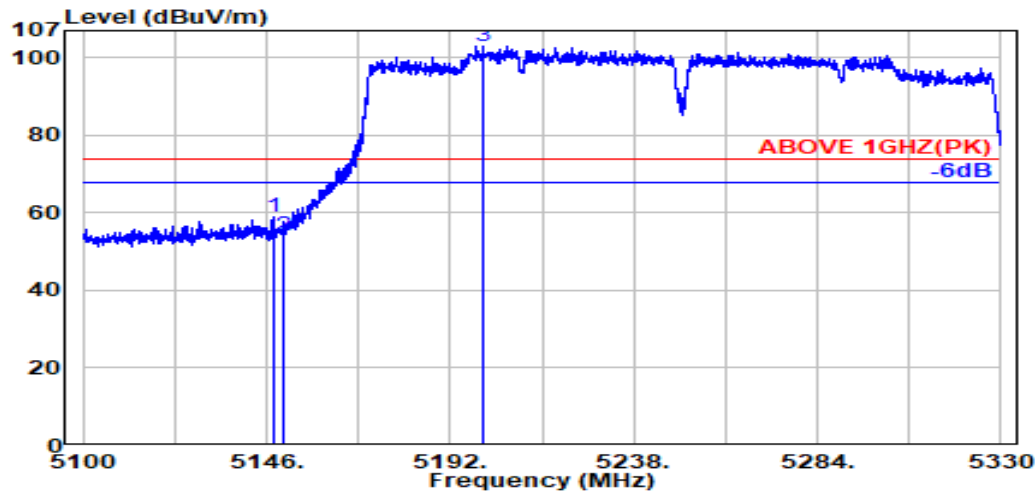

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.600	33.70	8.54	34.28	51.01	58.97	74.00	15.03	Peak
5150.000	33.70	8.54	34.28	46.10	54.06	74.00	19.94	Peak
@ 5200.200	33.70	8.57	34.26	95.05	103.06	---	---	Peak

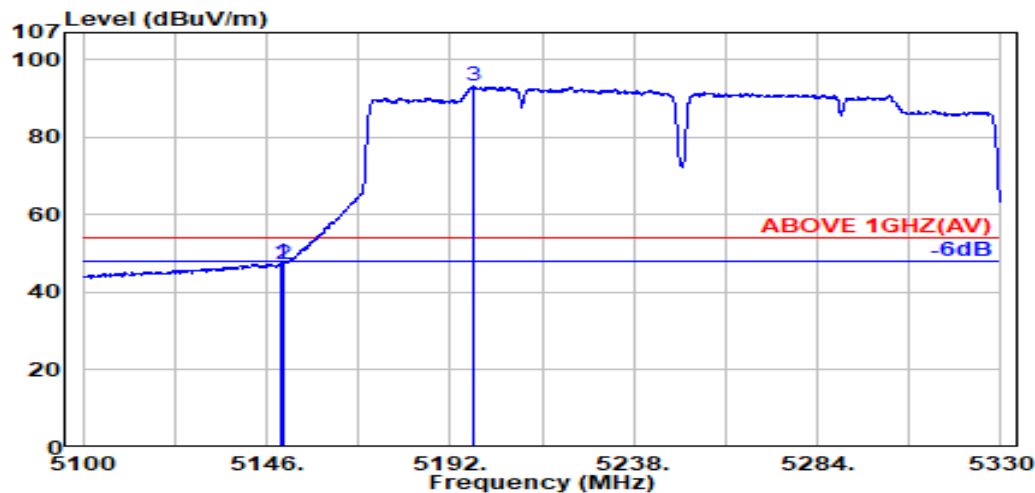

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.70	8.54	34.28	39.66	47.63	54.00	6.37	Average
5150.000	33.70	8.54	34.28	39.29	47.25	54.00	6.75	Average
@ 5197.600	33.70	8.57	34.26	85.08	93.09	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

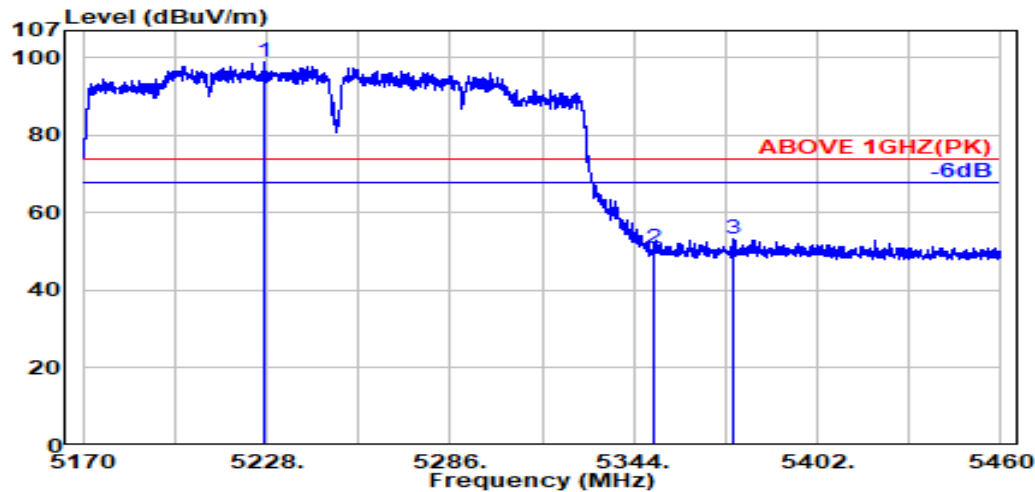

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5227.200	33.75	8.59	34.26	90.89	98.98	---	---	Peak
5350.000	33.90	8.67	34.22	42.46	50.81	74.00	23.19	Peak
5375.300	34.00	8.68	34.21	44.79	53.26	74.00	20.74	Peak

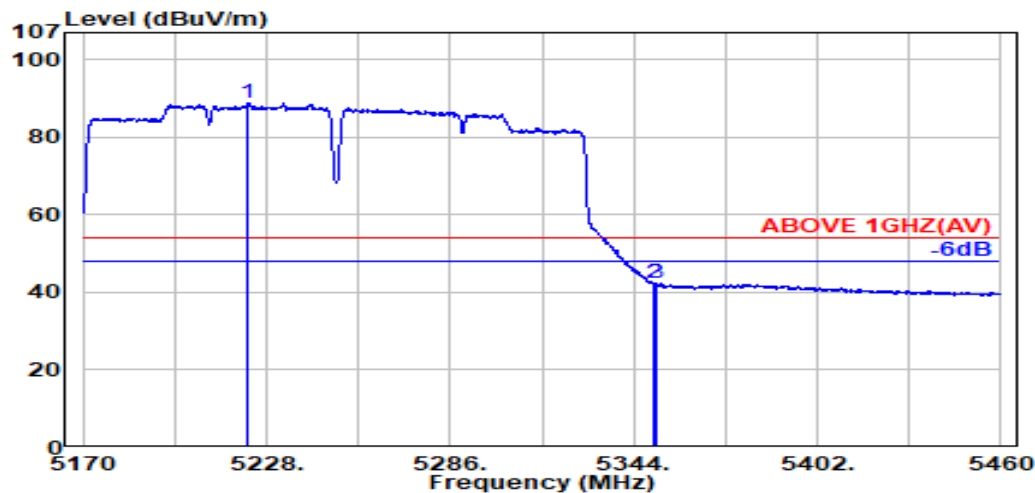

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.300	33.74	8.59	34.26	80.80	88.88	---	---	Average
5350.000	33.90	8.67	34.22	34.06	42.41	54.00	11.59	Average
5351.300	33.91	8.67	34.22	34.09	42.45	54.00	11.55	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

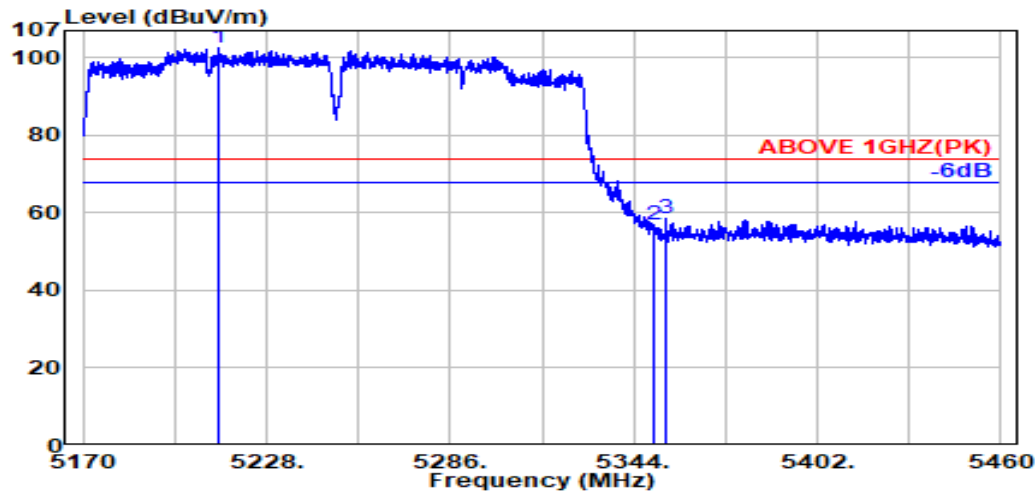

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5213.000	33.73	8.58	34.26	94.31	102.36	---	---	Peak
5350.000	33.90	8.67	34.22	48.47	56.82	74.00	17.18	Peak
5354.000	33.92	8.67	34.22	50.17	58.54	74.00	15.46	Peak

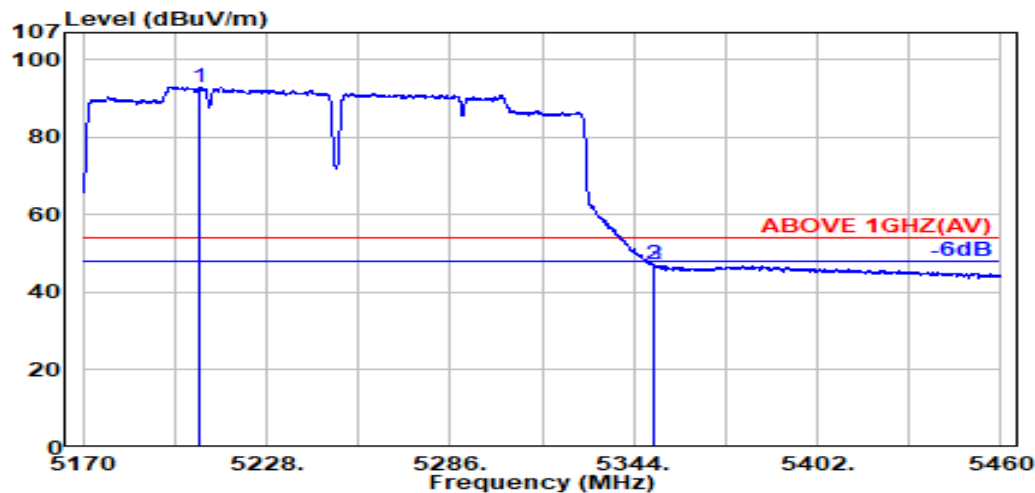

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5207.100	33.71	8.58	34.26	85.01	93.05	---	---	Average
5350.000	33.90	8.67	34.22	38.71	47.06	54.00	6.94	Average
5350.200	33.90	8.67	34.22	38.81	47.16	54.00	6.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

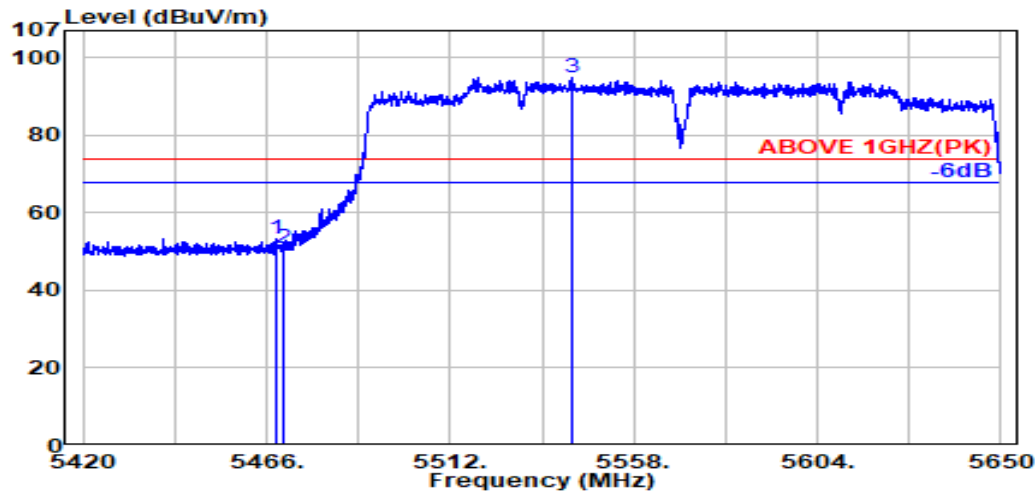

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	44.56	53.28	74.00	20.72	Peak
5470.000	34.16	8.74	34.18	42.08	50.80	74.00	23.20	Peak
@ 5542.500	34.10	8.78	34.19	86.26	94.95	---	---	Peak

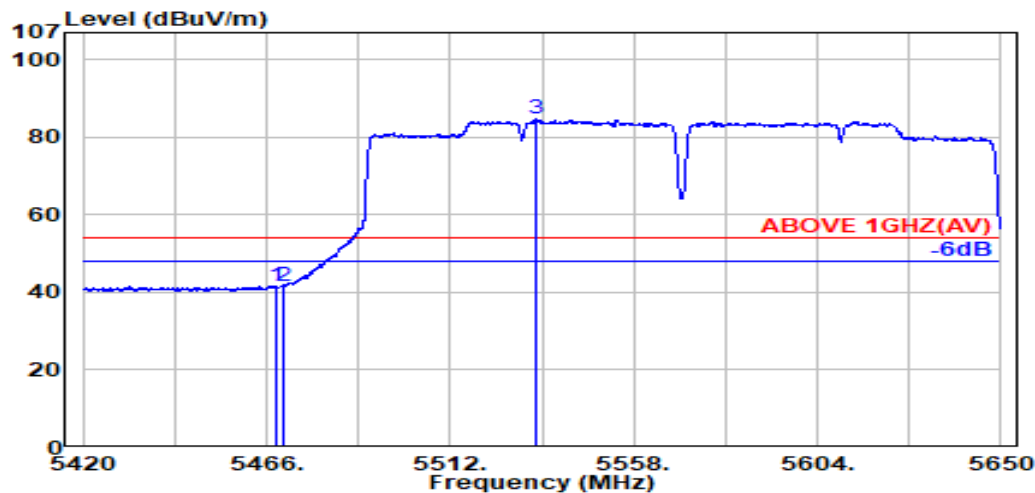

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.16	8.73	34.18	33.06	41.77	54.00	12.23	Average
5470.000	34.16	8.74	34.18	32.90	41.62	54.00	12.38	Average
@ 5533.700	34.10	8.77	34.19	75.93	84.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

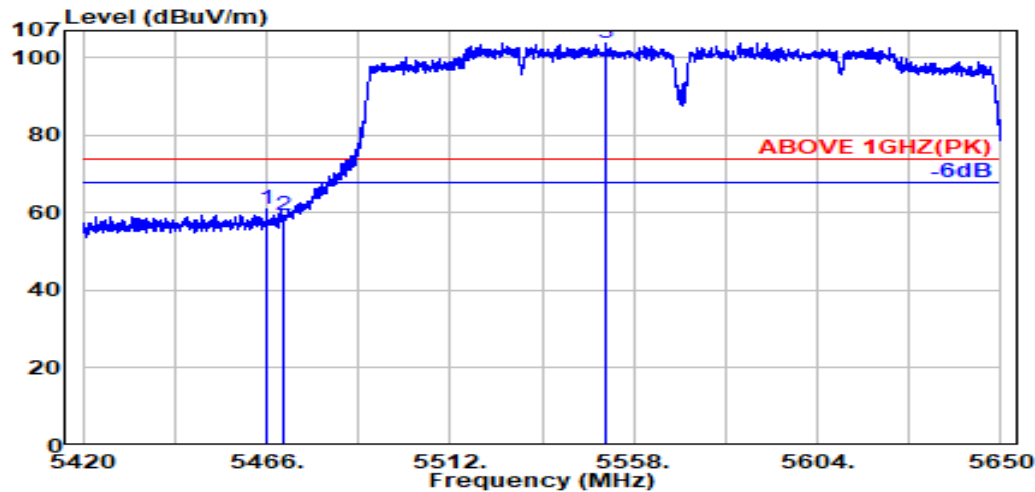

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.17	8.73	34.18	52.20	60.92	74.00	13.08	Peak
5470.000	34.16	8.74	34.18	50.84	59.56	74.00	14.44	Peak
@ 5551.200	34.10	8.78	34.19	95.13	103.81	---	---	Peak

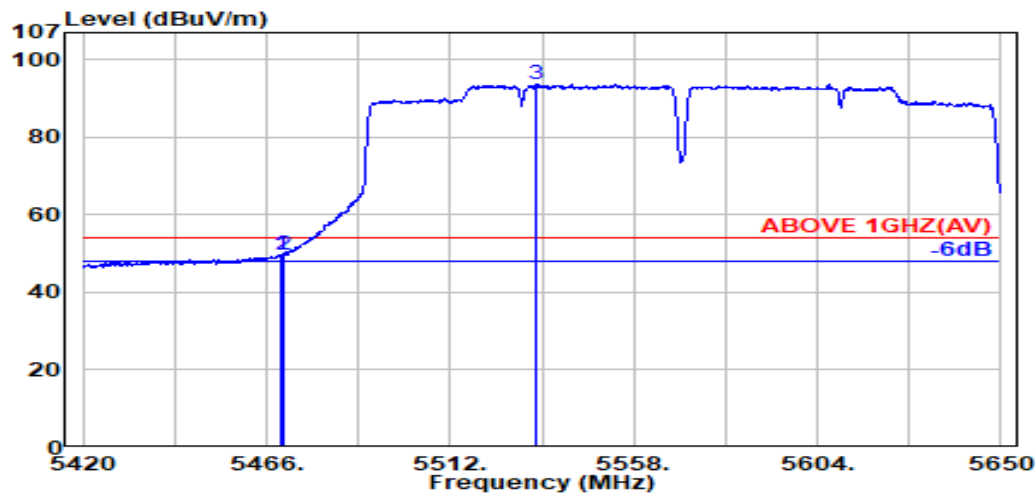

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.16	8.74	34.18	41.15	49.86	54.00	4.14	Average
5470.000	34.16	8.74	34.18	40.83	49.55	54.00	4.45	Average
@ 5533.600	34.10	8.77	34.19	84.94	93.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

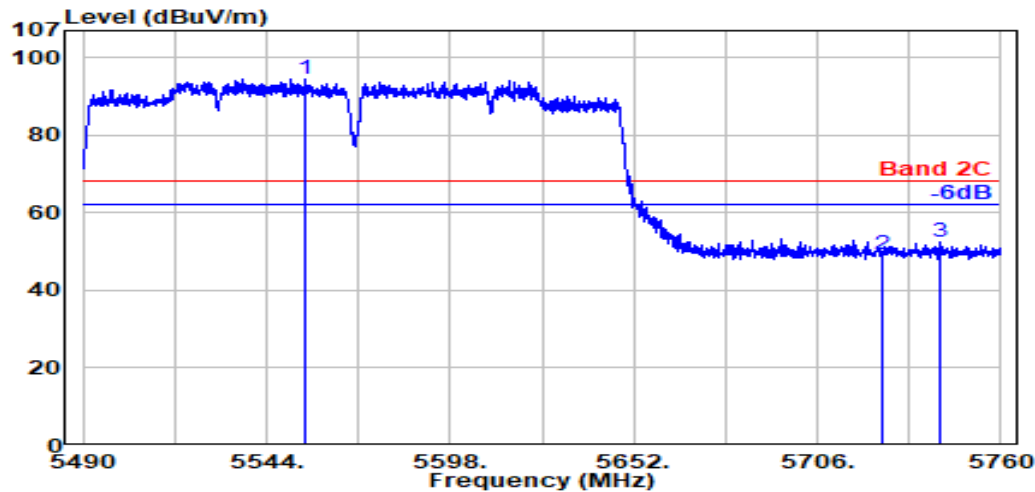

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5555.500	34.09	8.79	34.20	85.82	94.50	---	---	Peak
5725.000	33.80	8.88	34.28	40.94	49.34	68.20	18.86	Peak
5742.200	33.80	8.89	34.28	43.95	52.35	68.20	15.85	Peak

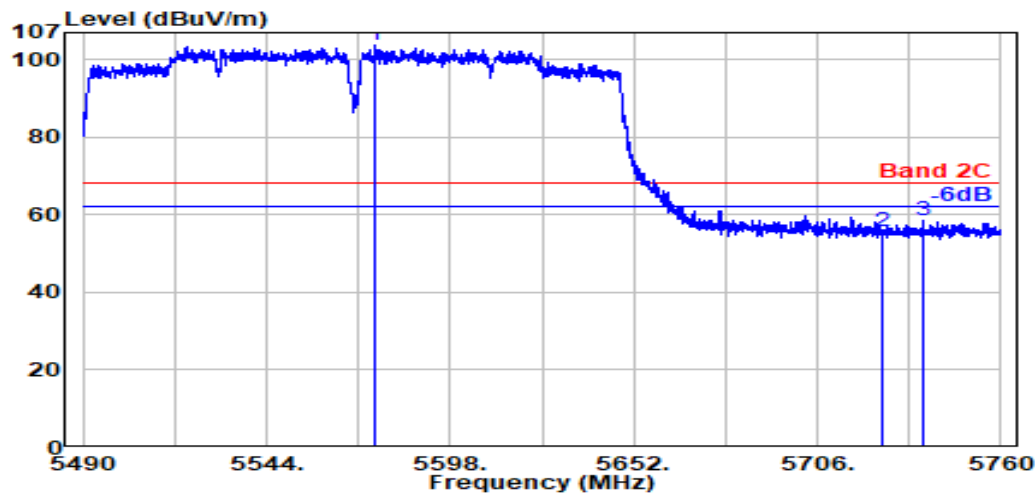

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5575.800	34.05	8.80	34.21	95.29	103.93	---	---	Peak
5725.000	33.80	8.88	34.28	47.31	55.71	68.20	12.49	Peak
5737.000	33.80	8.89	34.28	50.01	58.41	68.20	9.79	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

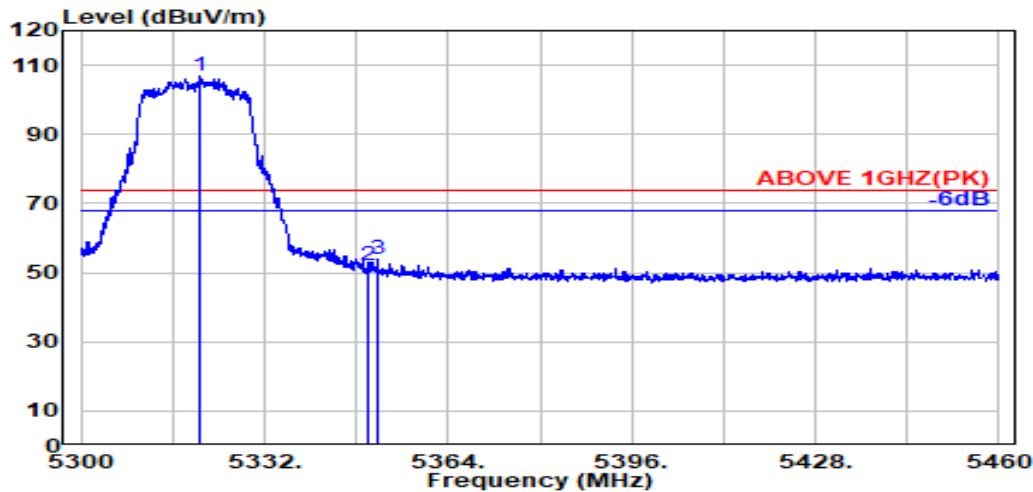

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.900	34.02	8.65	34.23	98.61	107.05	---	---	Peak
5350.000	33.90	8.67	34.22	43.66	52.01	74.00	21.99	Peak
5351.700	33.91	8.67	34.22	45.62	53.98	74.00	20.02	Peak

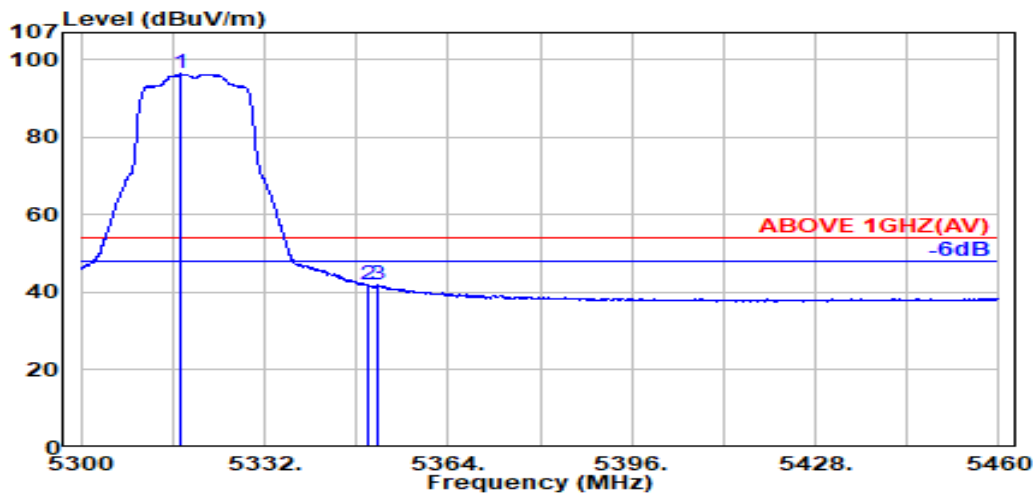

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.03	8.65	34.23	87.87	96.32	---	---	Average
5350.000	33.90	8.67	34.22	33.58	41.93	54.00	12.07	Average
5351.700	33.91	8.67	34.22	33.50	41.86	54.00	12.14	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

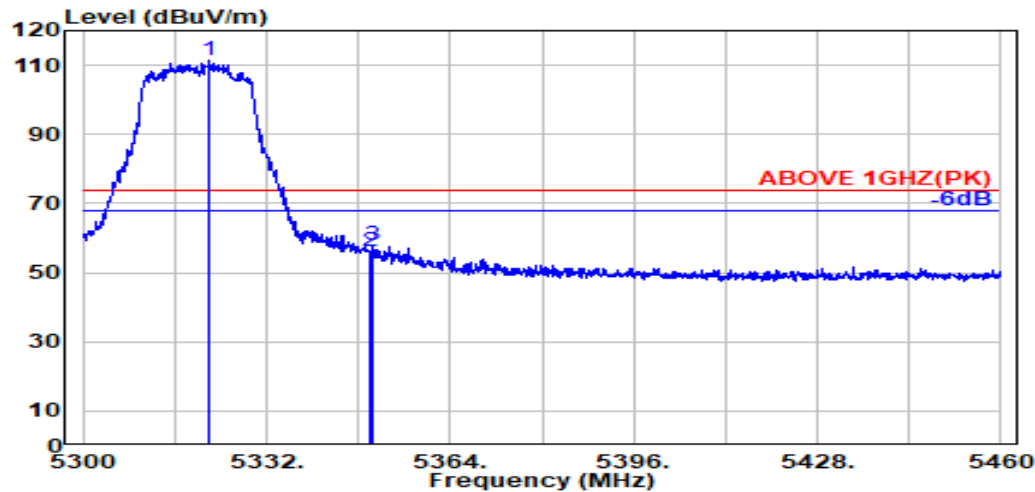

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.900	34.01	8.65	34.23	102.93	111.36	---	---	Peak
5350.000	33.90	8.67	34.22	47.80	56.15	74.00	17.85	Peak
5350.600	33.90	8.67	34.22	49.66	58.01	74.00	15.99	Peak

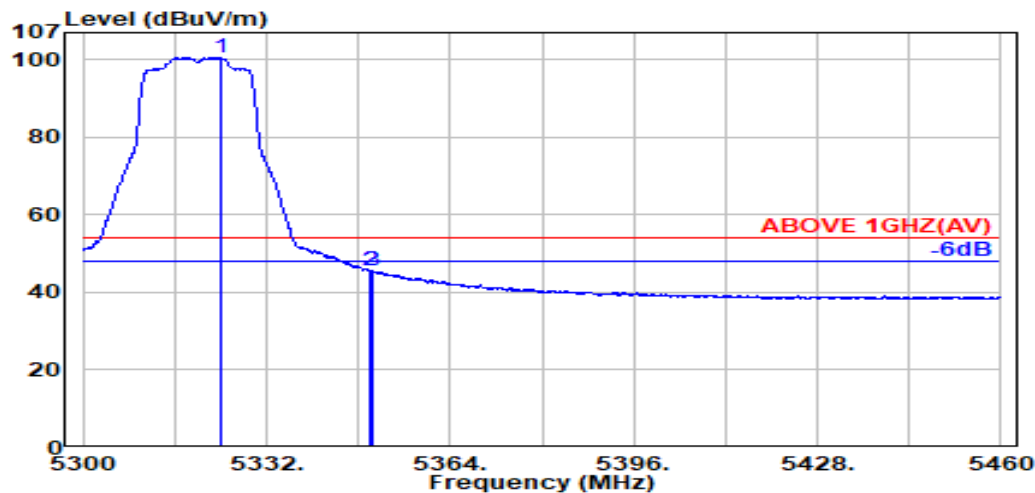

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.00	8.65	34.22	92.27	100.70	---	---	Average
5350.000	33.90	8.67	34.22	37.12	45.47	54.00	8.53	Average
5350.600	33.90	8.67	34.22	37.10	45.45	54.00	8.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

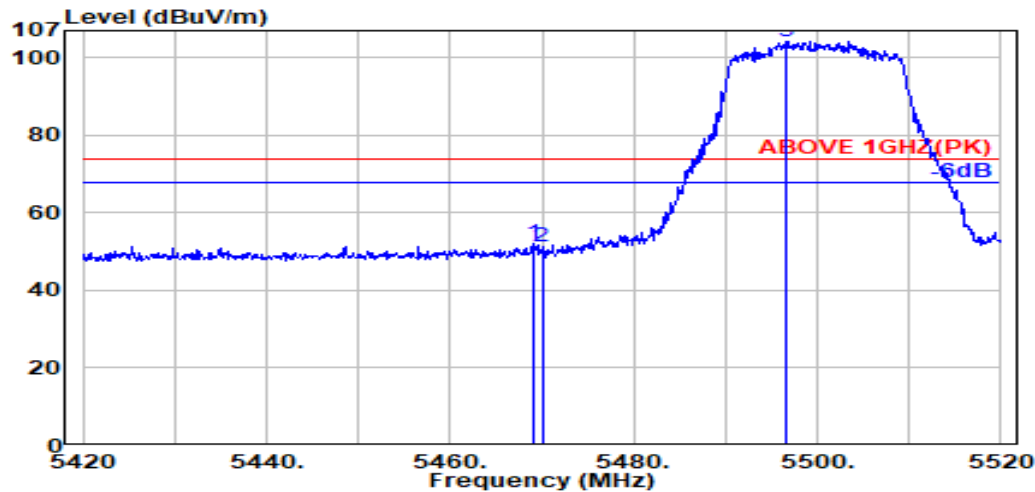

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	43.37	52.09	74.00	21.91	Peak
5470.000	34.16	8.74	34.18	42.71	51.43	74.00	22.57	Peak
@ 5496.600	34.11	8.75	34.17	95.61	104.30	---	---	Peak

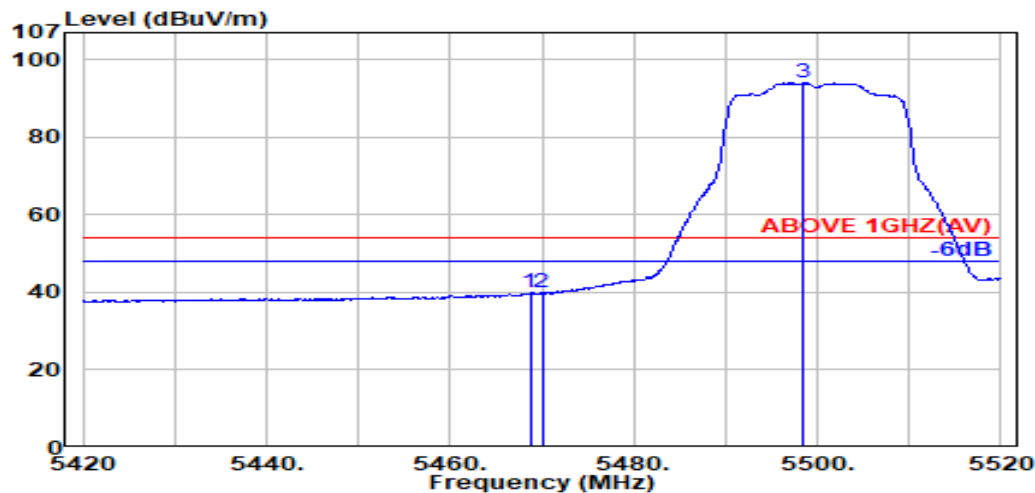

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	31.14	39.86	54.00	14.14	Average
5470.000	34.16	8.74	34.18	31.22	39.94	54.00	14.06	Average
@ 5498.400	34.10	8.75	34.17	85.45	94.14	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

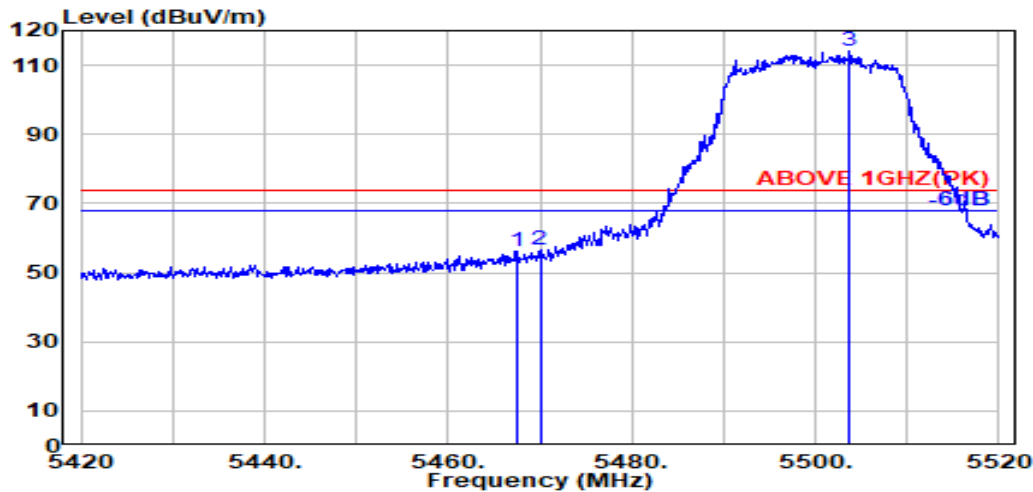

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.16	8.73	34.18	47.50	56.22	74.00	17.78	Peak
5470.000	34.16	8.74	34.18	47.81	56.53	74.00	17.47	Peak
@ 5503.700	34.10	8.76	34.17	105.25	113.93	---	---	Peak

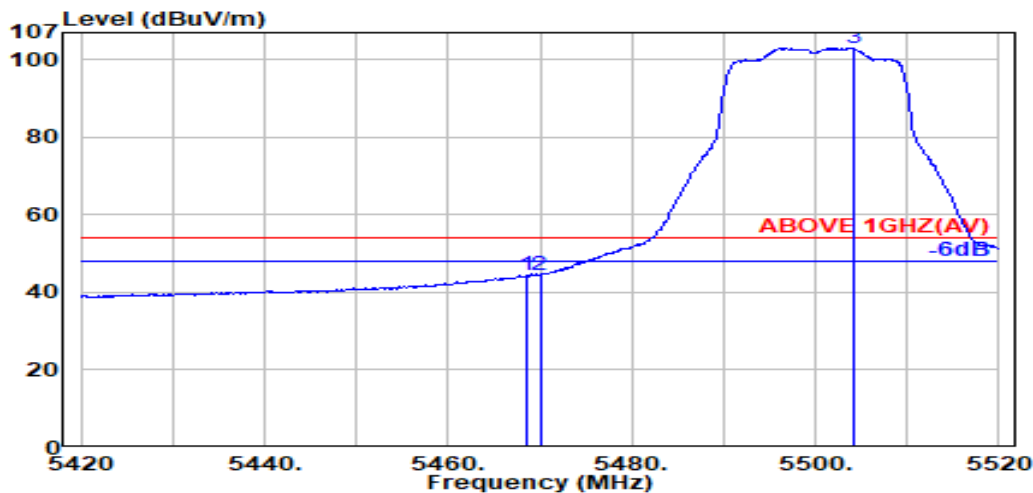

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	35.72	44.44	54.00	9.56	Average
5470.000	34.16	8.74	34.18	35.89	44.61	54.00	9.39	Average
@ 5504.100	34.10	8.76	34.17	94.38	103.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

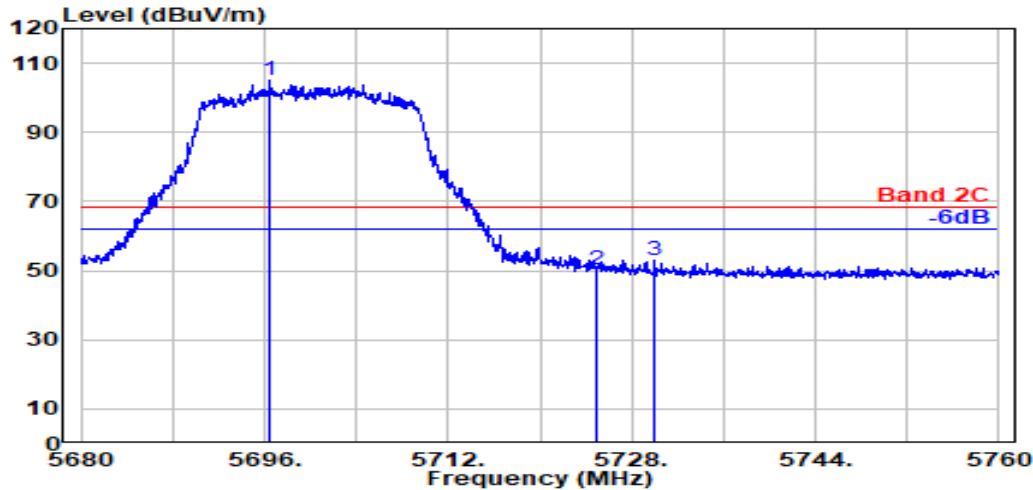

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.500	33.81	8.86	34.26	96.58	105.00	---	---	Peak
5725.000	33.80	8.88	34.28	42.00	50.40	68.20	17.80	Peak
5730.000	33.80	8.88	34.28	44.59	52.99	68.20	15.21	Peak

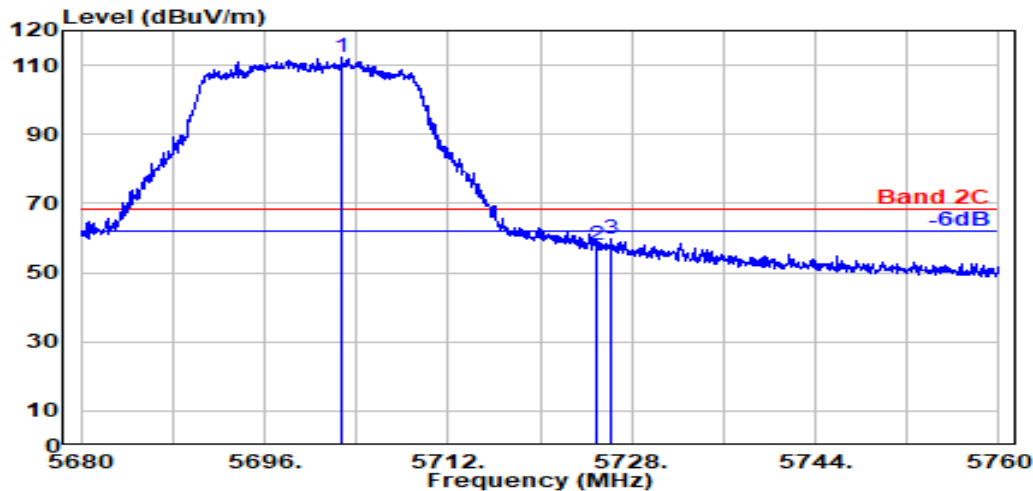

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.700	33.80	8.87	34.27	103.99	112.39	---	---	Peak
5725.000	33.80	8.88	34.28	49.37	57.78	68.20	10.42	Peak
5726.250	33.80	8.88	34.28	51.15	59.55	68.20	8.65	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

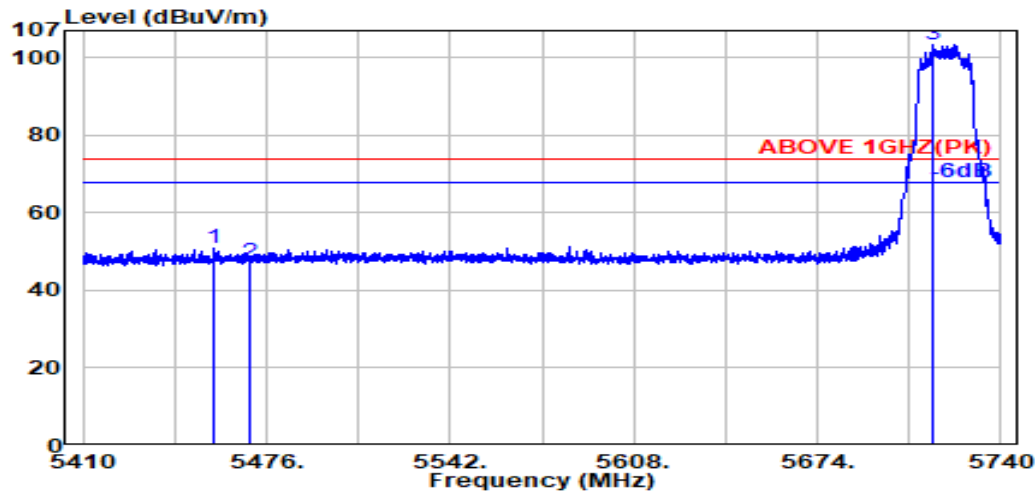

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.800	34.19	8.73	34.18	42.24	50.97	74.00	23.03	Peak
5470.000	34.16	8.74	34.18	38.63	47.35	74.00	26.65	Peak
@ 5715.900	33.80	8.88	34.27	95.10	103.50	---	---	Peak

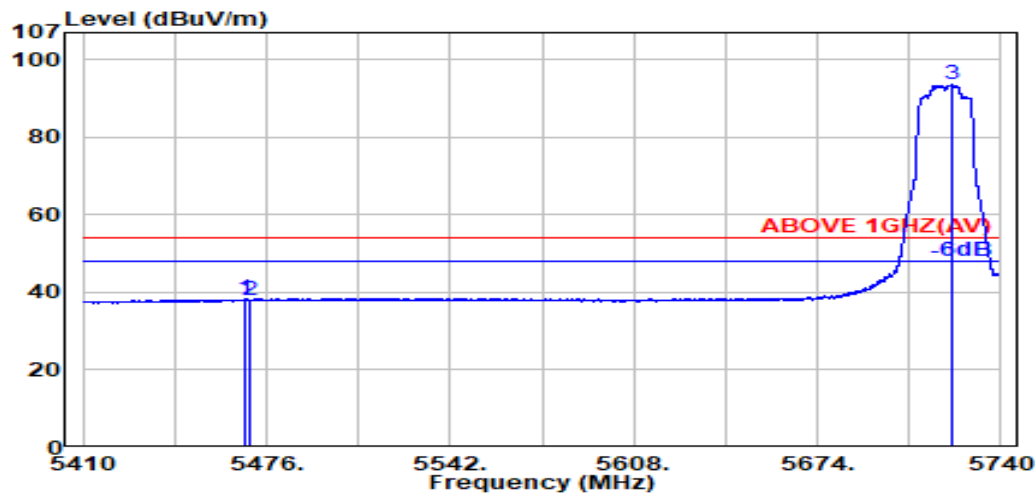

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	29.47	38.19	54.00	15.81	Average
5470.000	34.16	8.74	34.18	29.33	38.04	54.00	15.96	Average
@ 5722.700	33.80	8.88	34.27	85.20	93.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

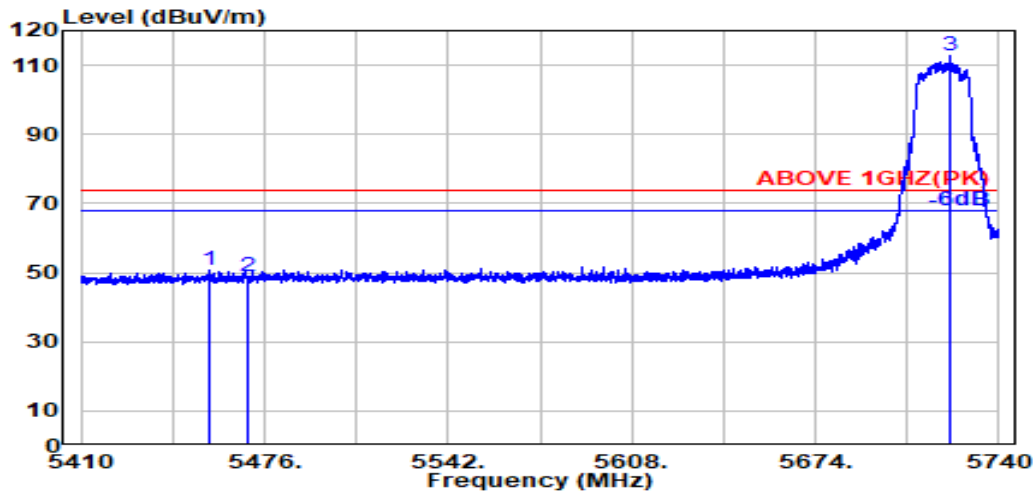

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.000	34.19	8.73	34.18	42.10	50.84	74.00	23.16	Peak
5470.000	34.16	8.74	34.18	40.38	49.10	74.00	24.90	Peak
@ 5722.600	33.80	8.88	34.27	104.32	112.72	---	---	Peak

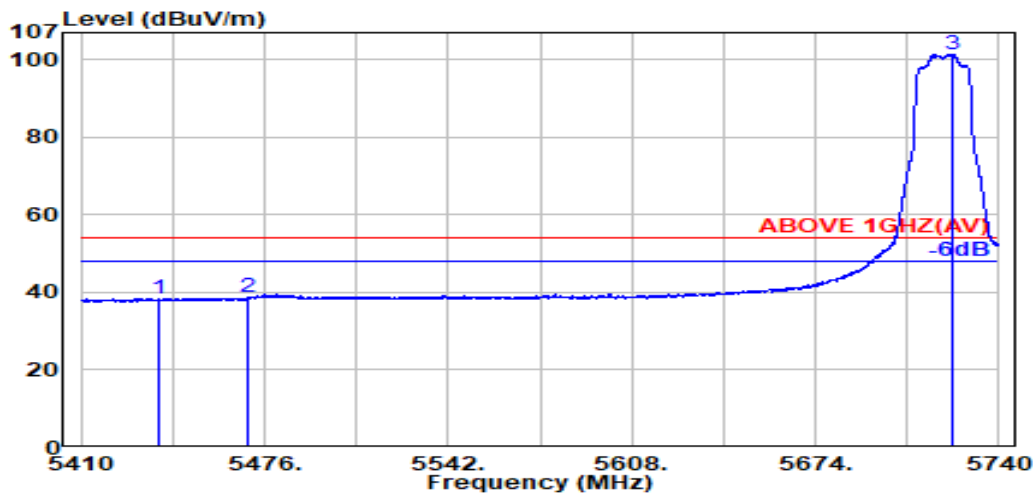

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.100	34.18	8.72	34.19	29.81	38.51	54.00	15.49	Average
5470.000	34.16	8.74	34.18	29.95	38.67	54.00	15.33	Average
@ 5723.600	33.80	8.88	34.28	92.98	101.38	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

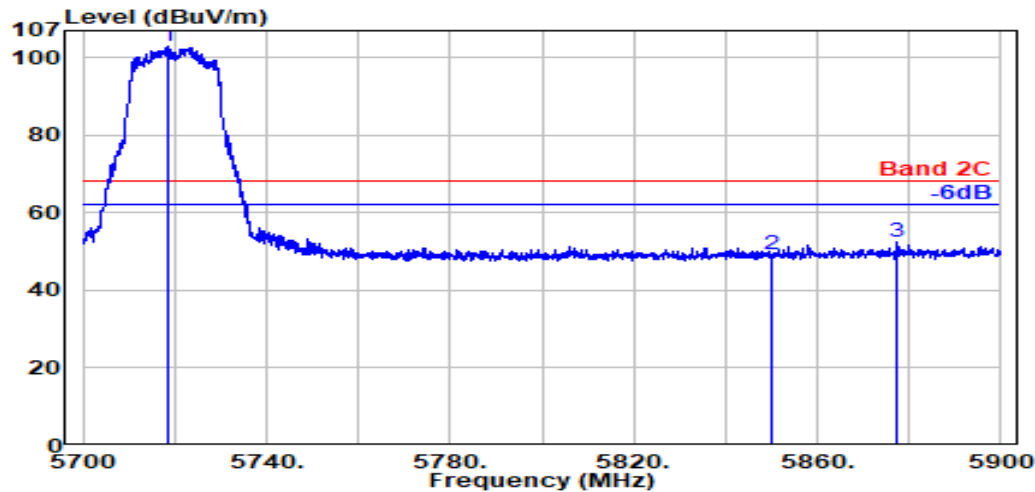

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.700	33.80	8.88	34.27	94.48	102.88	---	---	Peak
5850.000	34.10	8.95	34.33	40.39	49.10	68.20	19.10	Peak
5877.500	34.10	8.96	34.35	43.59	52.31	68.20	15.89	Peak

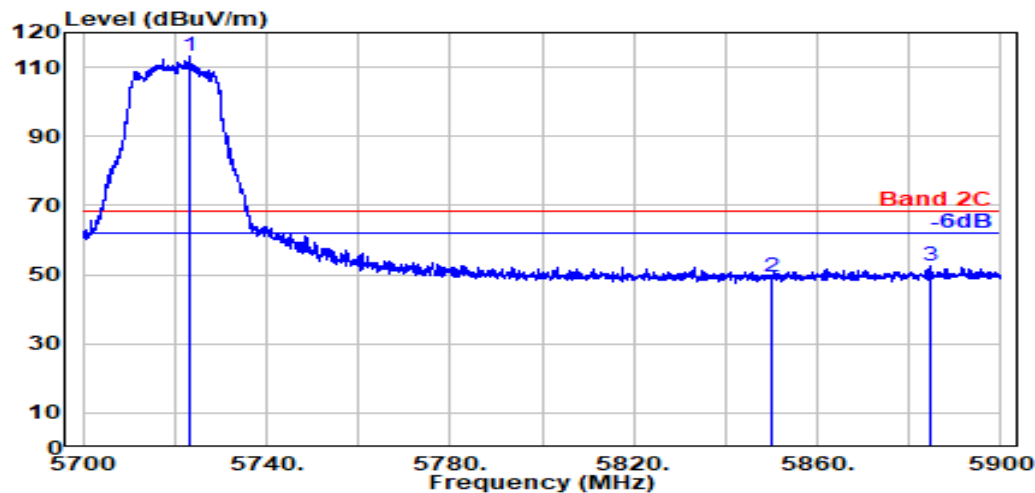

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.500	33.80	8.88	34.28	104.86	113.26	---	---	Peak
5850.000	34.10	8.95	34.33	40.58	49.29	68.20	18.91	Peak
5884.600	34.10	8.97	34.35	43.78	52.50	68.20	15.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

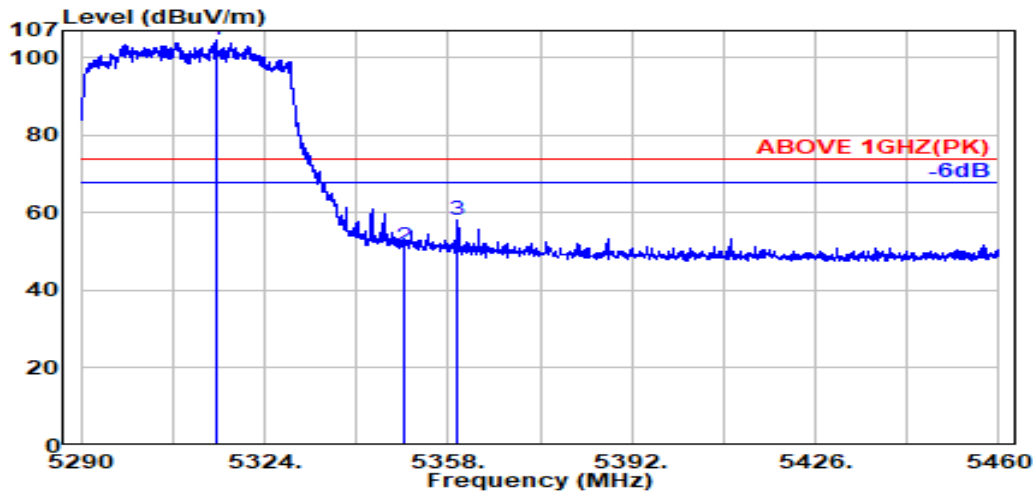

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.900	34.04	8.64	34.23	96.09	104.54	---	---	Peak
5350.000	33.90	8.67	34.22	42.98	51.33	74.00	22.67	Peak
5359.800	33.94	8.67	34.21	49.77	58.17	74.00	15.83	Peak

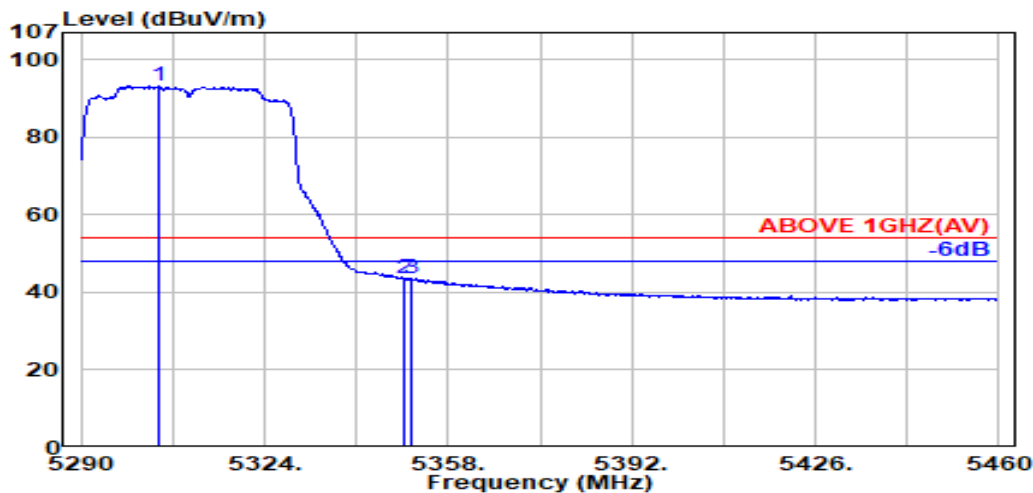

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.400	34.08	8.64	34.23	84.74	93.23	---	---	Average
5350.000	33.90	8.67	34.22	35.26	43.61	54.00	10.39	Average
5351.100	33.90	8.67	34.22	35.34	43.69	54.00	10.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

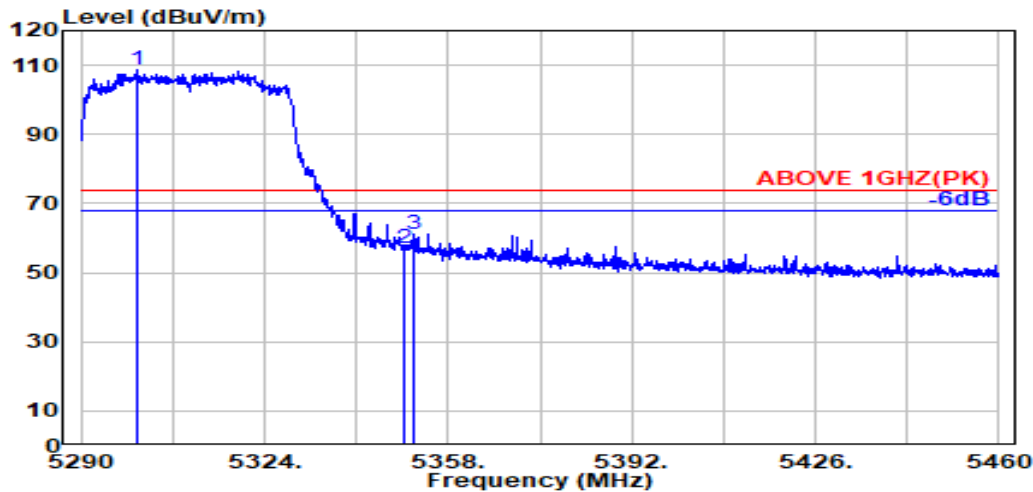

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.400	34.10	8.64	34.23	100.14	108.64	---	---	Peak
5350.000	33.90	8.67	34.22	48.56	56.91	74.00	17.09	Peak
5351.700	33.91	8.67	34.22	52.75	61.11	74.00	12.89	Peak

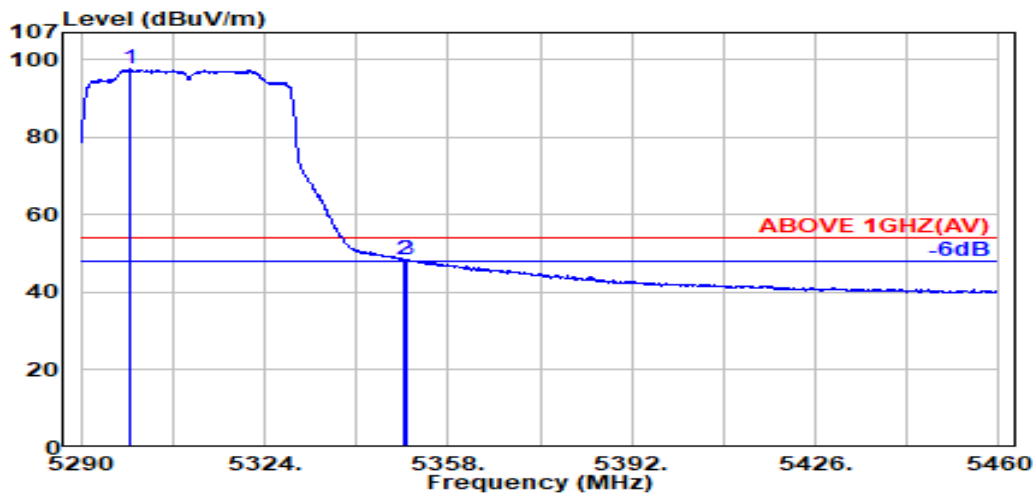

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.000	34.09	8.63	34.23	89.03	97.52	---	---	Average
5350.000	33.90	8.67	34.22	40.01	48.36	54.00	5.64	Average
5350.500	33.90	8.67	34.22	40.23	48.58	54.00	5.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

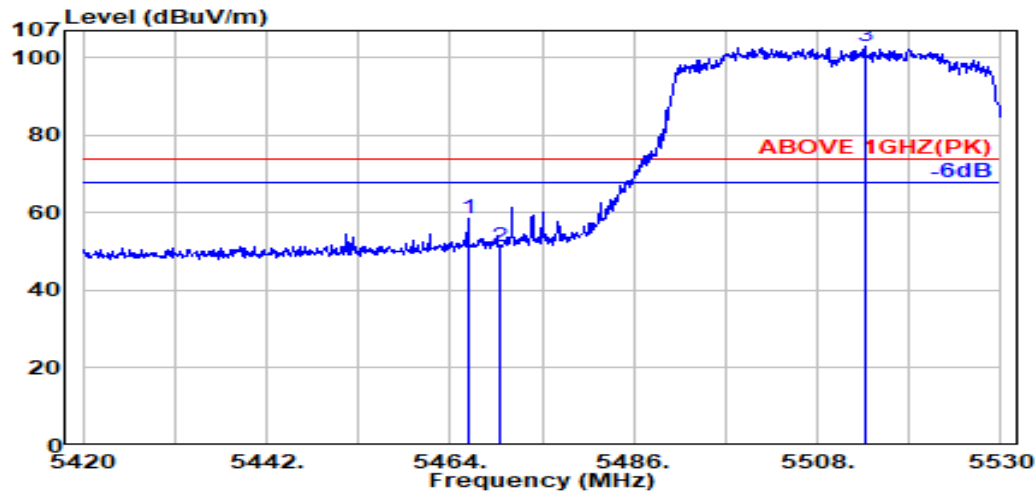

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	8.73	34.18	49.64	58.36	74.00	15.64	Peak
5470.000	34.16	8.74	34.18	42.50	51.21	74.00	22.79	Peak
@ 5513.700	34.10	8.76	34.18	94.39	103.07	---	---	Peak

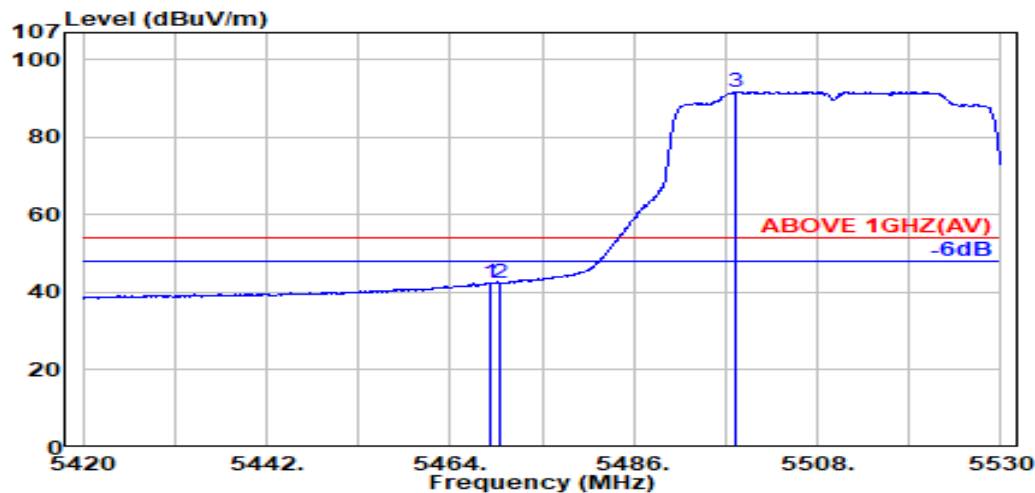

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	33.76	42.48	54.00	11.52	Average
5470.000	34.16	8.74	34.18	33.64	42.36	54.00	11.64	Average
@ 5498.200	34.10	8.75	34.17	83.12	91.80	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

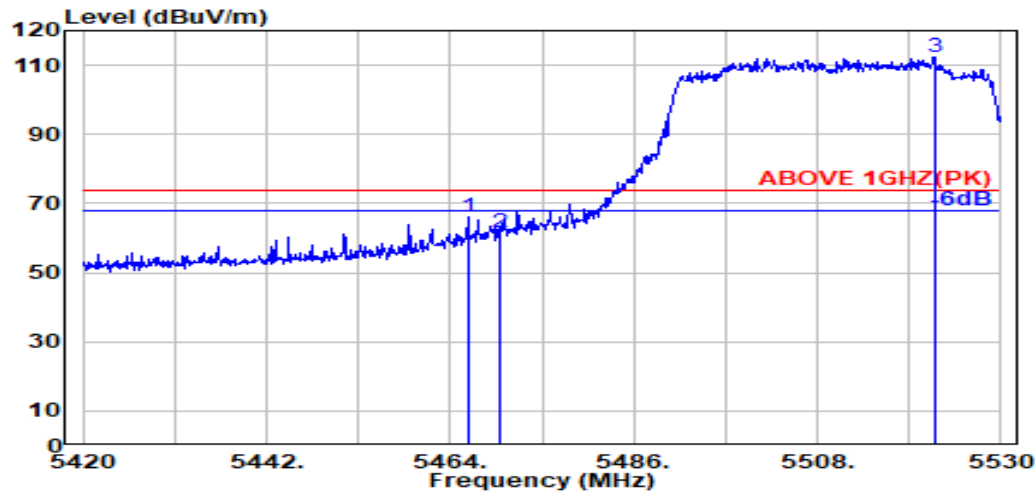

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	8.73	34.18	57.41	66.13	74.00	7.87	Peak
5470.000	34.16	8.74	34.18	52.92	61.64	74.00	12.36	Peak
@ 5522.000	34.10	8.77	34.18	103.79	112.47	---	---	Peak

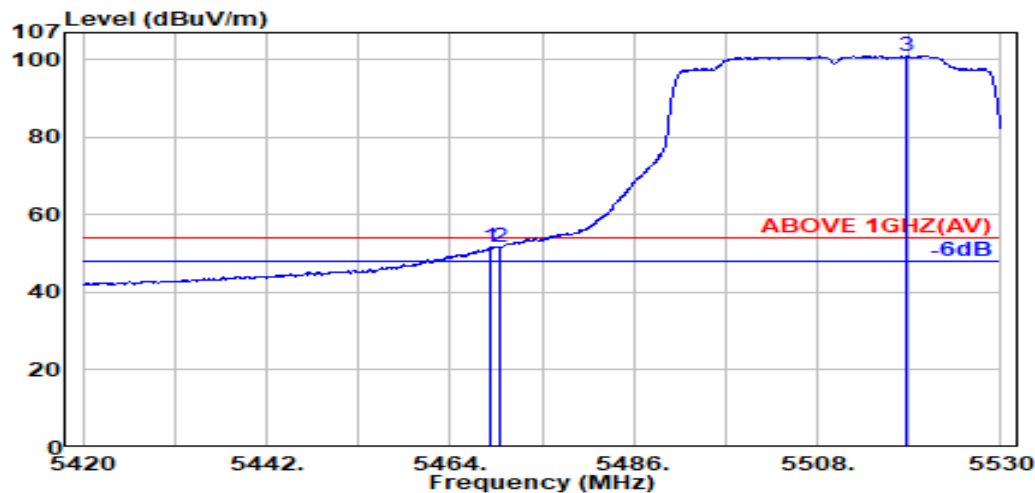

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	42.78	51.50	54.00	2.50	Average
5470.000	34.16	8.74	34.18	43.13	51.85	54.00	2.15	Average
@ 5518.700	34.10	8.76	34.18	92.26	100.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

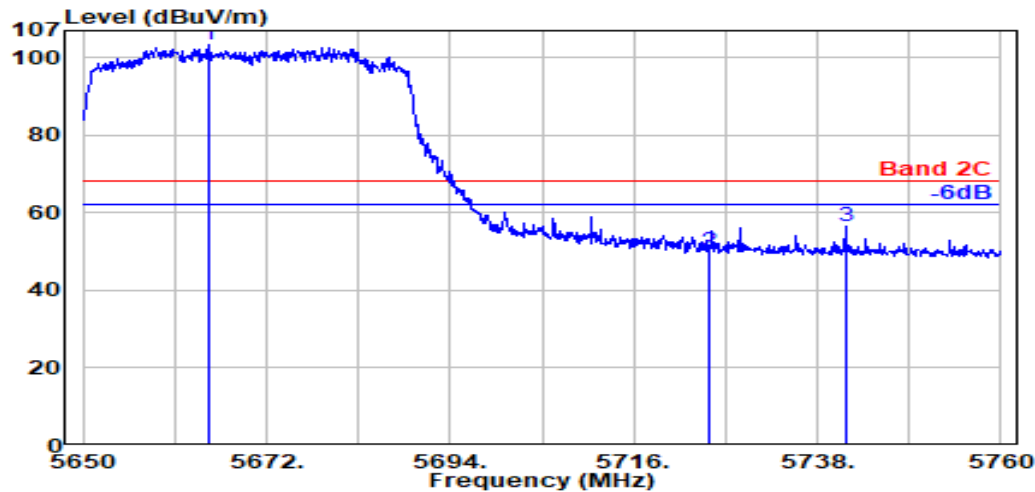

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5665.000	33.94	8.85	34.25	94.95	103.48	---	---	Peak
5725.000	33.80	8.88	34.28	41.78	50.19	68.20	18.01	Peak
5741.400	33.80	8.89	34.28	48.27	56.68	68.20	11.52	Peak

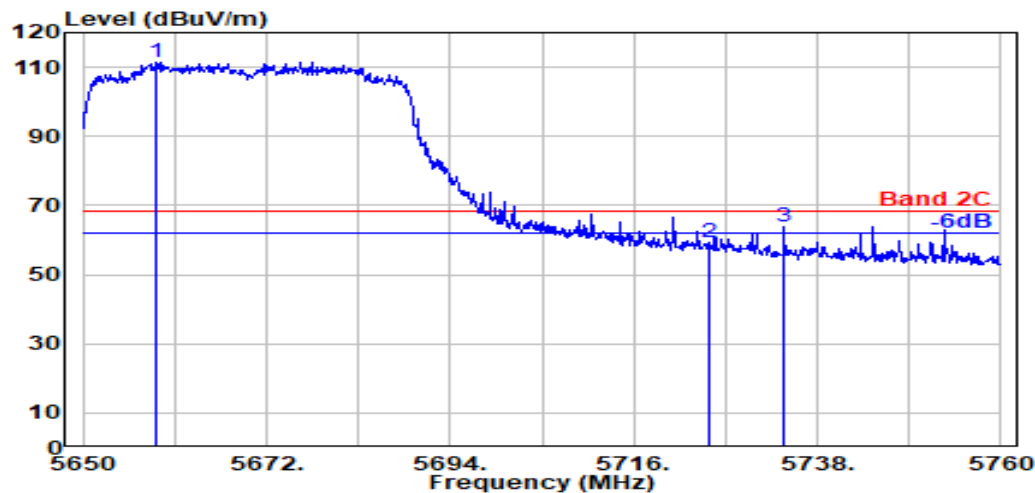

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5658.700	33.97	8.84	34.25	103.02	111.58	---	---	Peak
5725.000	33.80	8.88	34.28	50.75	59.16	68.20	9.04	Peak
5734.000	33.80	8.89	34.28	55.46	63.86	68.20	4.34	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

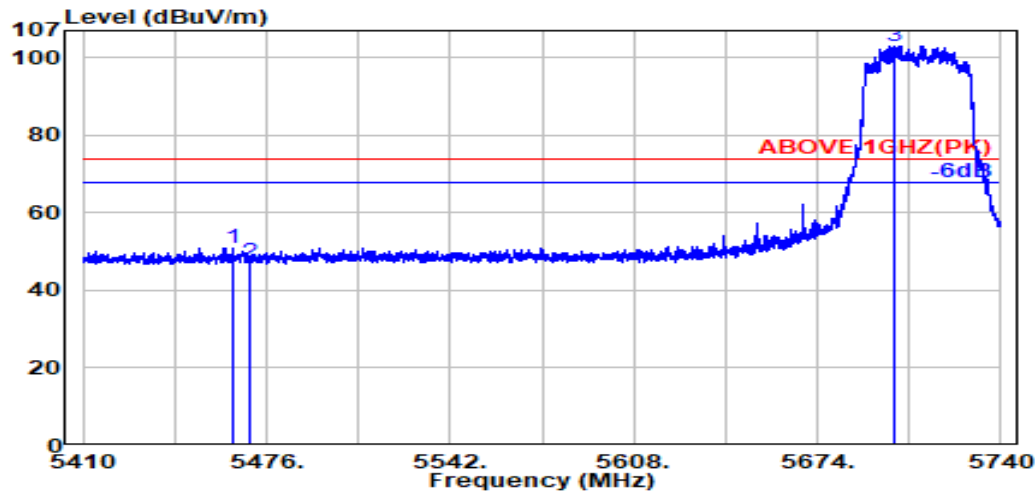

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.17	8.73	34.18	42.23	50.96	74.00	23.04	Peak
5470.000	34.16	8.74	34.18	38.70	47.42	74.00	26.58	Peak
@ 5701.800	33.80	8.87	34.27	94.61	103.01	---	---	Peak

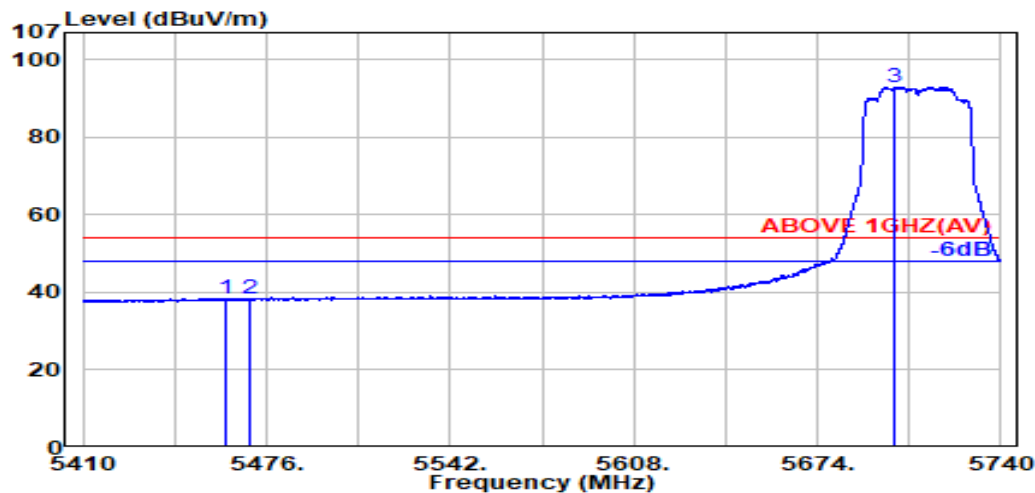

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.18	8.73	34.18	29.82	38.54	54.00	15.46	Average
5470.000	34.16	8.74	34.18	29.57	38.28	54.00	15.72	Average
@ 5702.000	33.80	8.87	34.27	84.62	93.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

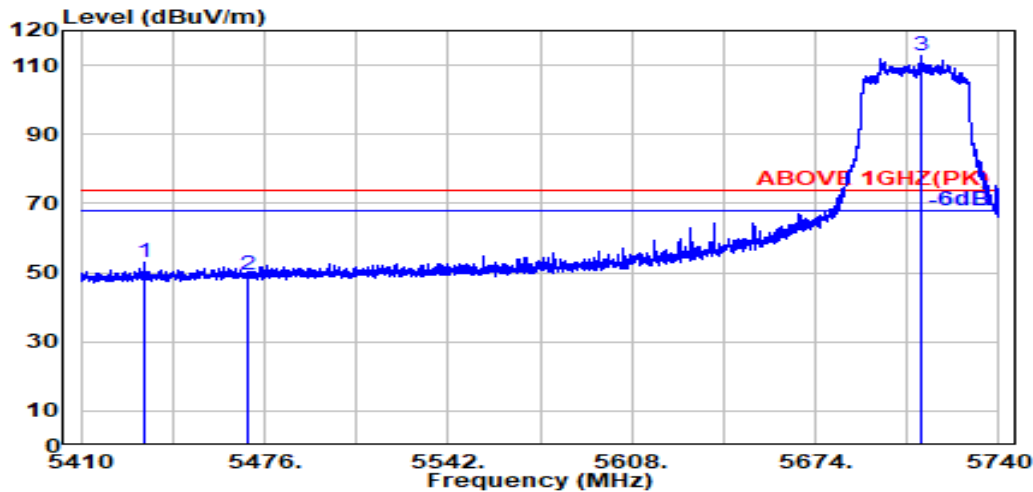

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.100	34.17	8.71	34.19	44.36	53.05	74.00	20.95	Peak
5470.000	34.16	8.74	34.18	40.75	49.47	74.00	24.53	Peak
@ 5712.300	33.80	8.87	34.27	104.47	112.88	---	---	Peak

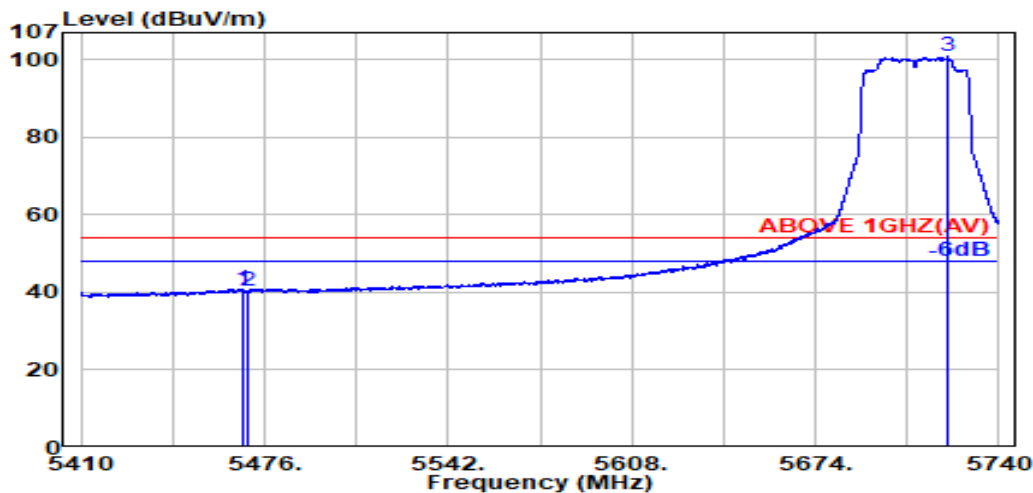

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	32.01	40.73	54.00	13.27	Average
5470.000	34.16	8.74	34.18	31.78	40.50	54.00	13.50	Average
@ 5721.400	33.80	8.88	34.27	92.35	100.76	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

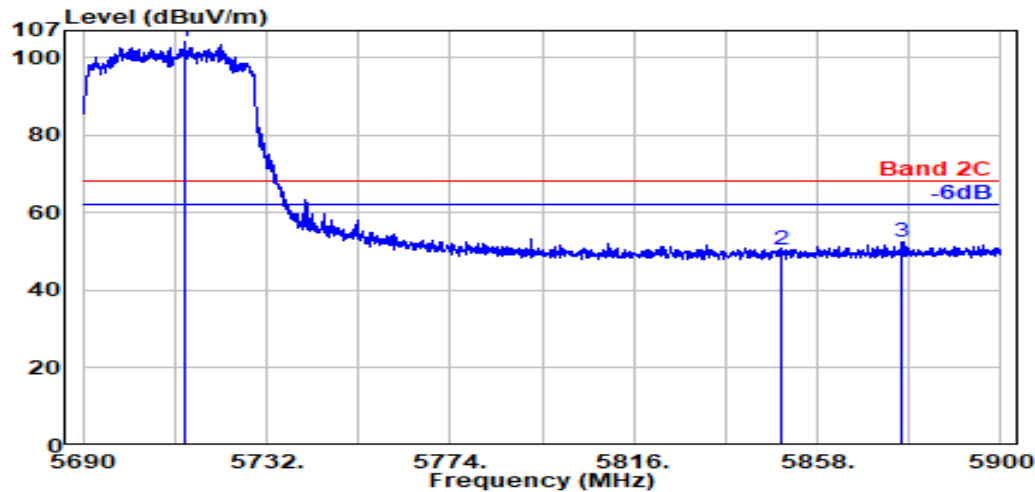

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.200	33.80	8.87	34.27	95.71	104.11	---	---	Peak
5850.000	34.10	8.95	34.33	41.59	50.30	68.20	17.90	Peak
5877.500	34.10	8.96	34.35	43.85	52.57	68.20	15.63	Peak

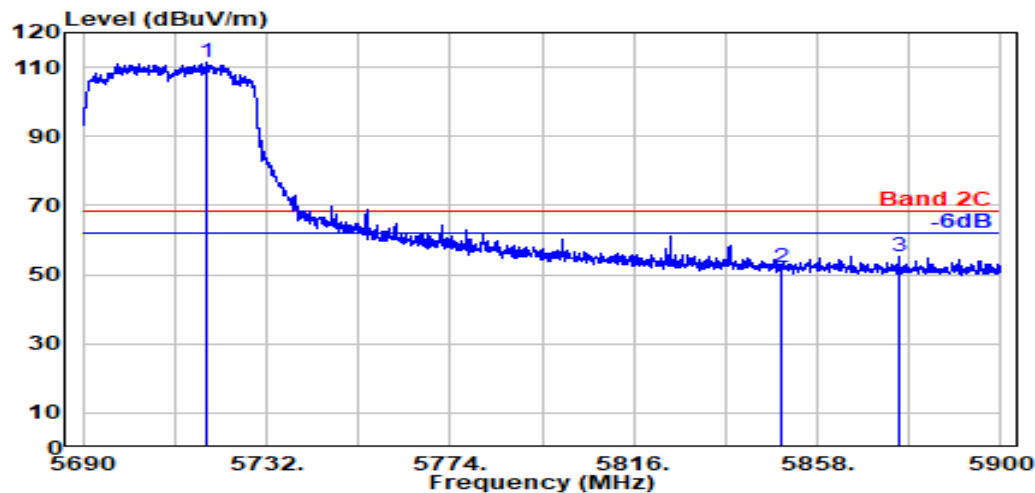

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.300	33.80	8.88	34.27	102.83	111.23	---	---	Peak
5850.000	34.10	8.95	34.33	43.58	52.30	68.20	15.90	Peak
5876.500	34.10	8.96	34.35	46.47	55.19	68.20	13.01	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

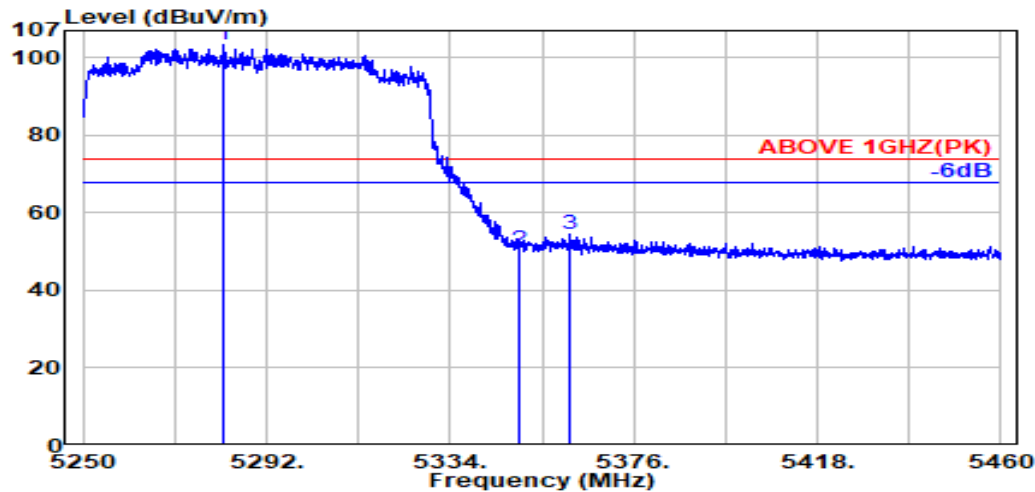

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.200	33.99	8.62	34.24	94.95	103.34	---	---	Peak
5350.000	33.90	8.67	34.22	41.95	50.30	74.00	23.70	Peak
5361.400	33.95	8.67	34.21	46.00	54.41	74.00	19.59	Peak

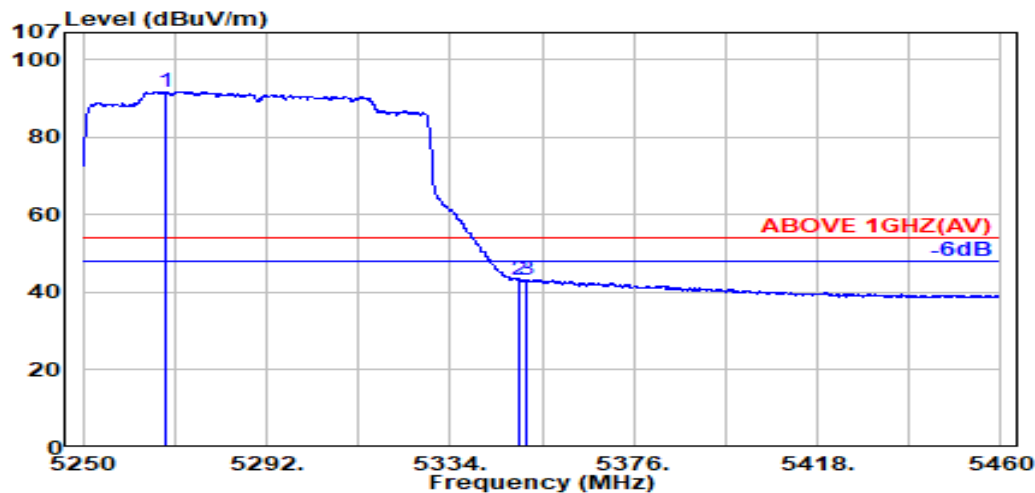

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.100	33.91	8.62	34.24	83.57	91.86	---	---	Average
5350.000	33.90	8.67	34.22	34.83	43.18	54.00	10.82	Average
5351.600	33.91	8.67	34.22	35.01	43.36	54.00	10.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

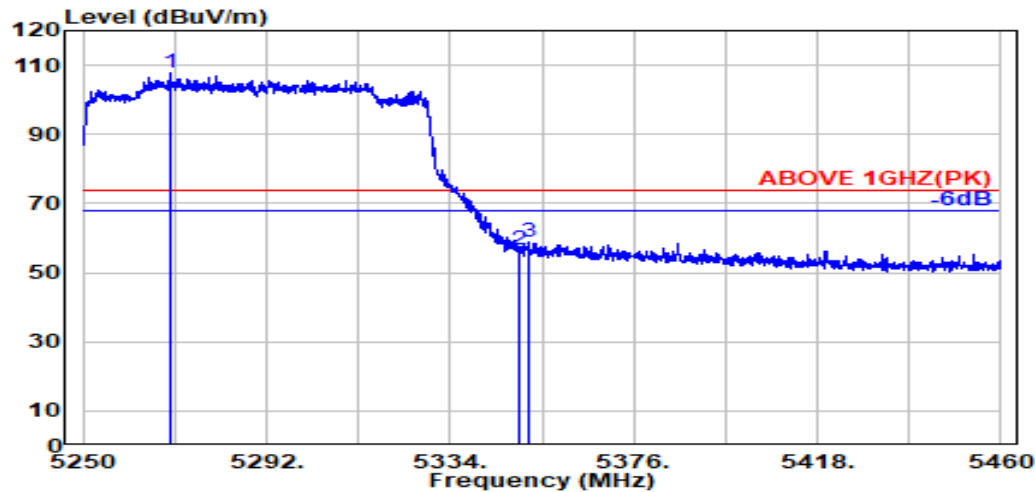

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.100	33.92	8.62	34.24	99.69	107.99	---	---	Peak
5350.000	33.90	8.67	34.22	48.40	56.75	74.00	17.25	Peak
5351.900	33.91	8.67	34.22	50.34	58.70	74.00	15.30	Peak

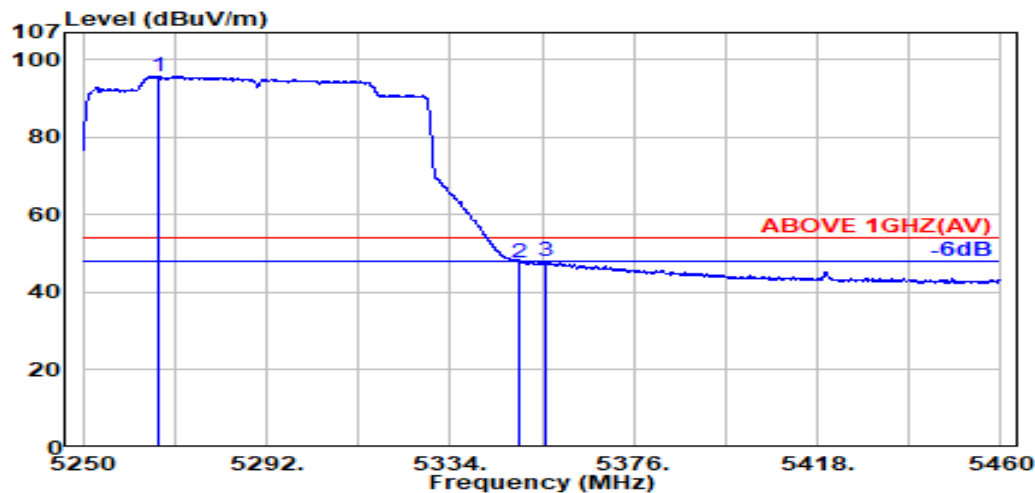

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.200	33.90	8.62	34.24	87.61	95.88	---	---	Average
5350.000	33.90	8.67	34.22	39.40	47.75	54.00	6.25	Average
5356.000	33.92	8.67	34.21	39.49	47.87	54.00	6.13	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

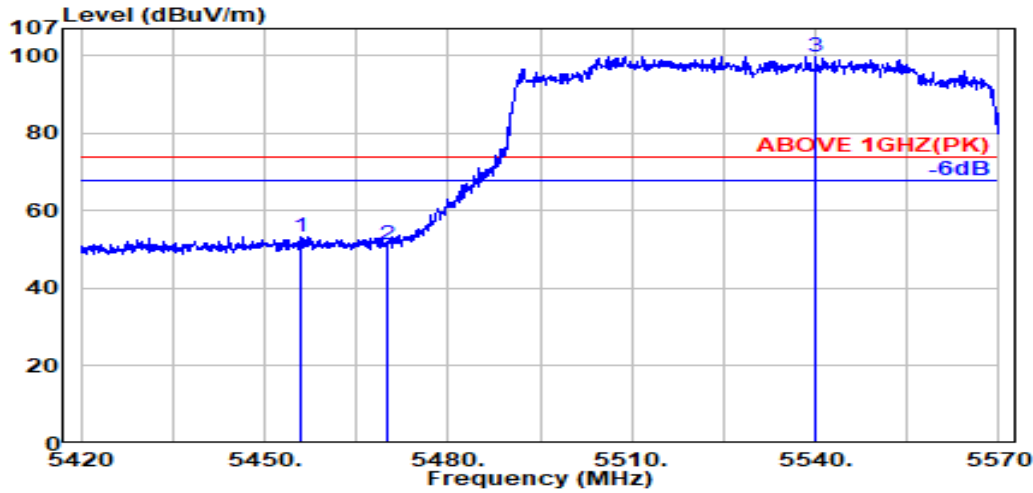

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.000	34.19	8.73	34.18	44.71	53.45	74.00	20.55	Peak
5470.000	34.16	8.74	34.18	42.68	51.40	74.00	22.60	Peak
@ 5540.000	34.10	8.78	34.19	91.10	99.79	---	---	Peak

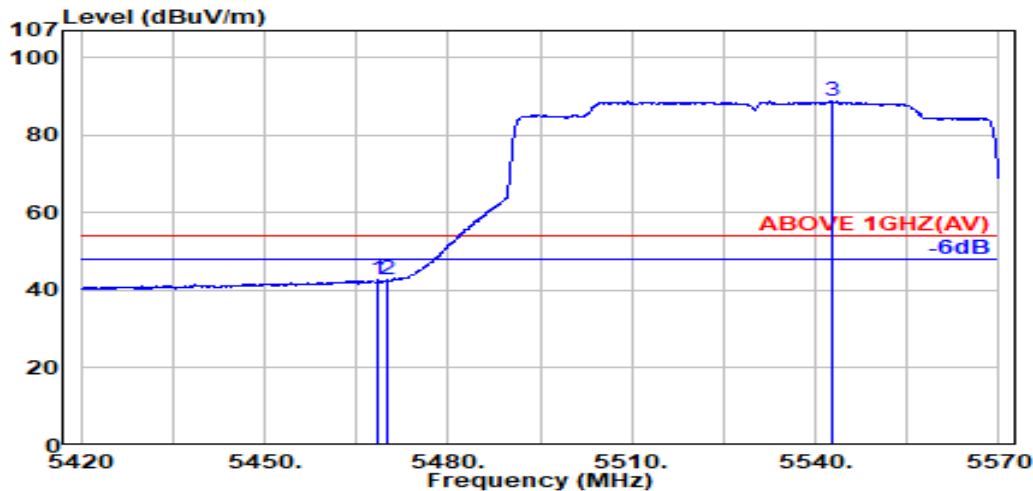

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	33.98	42.70	54.00	11.30	Average
5470.000	34.16	8.74	34.18	33.90	42.62	54.00	11.38	Average
@ 5542.600	34.10	8.78	34.19	80.01	88.70	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

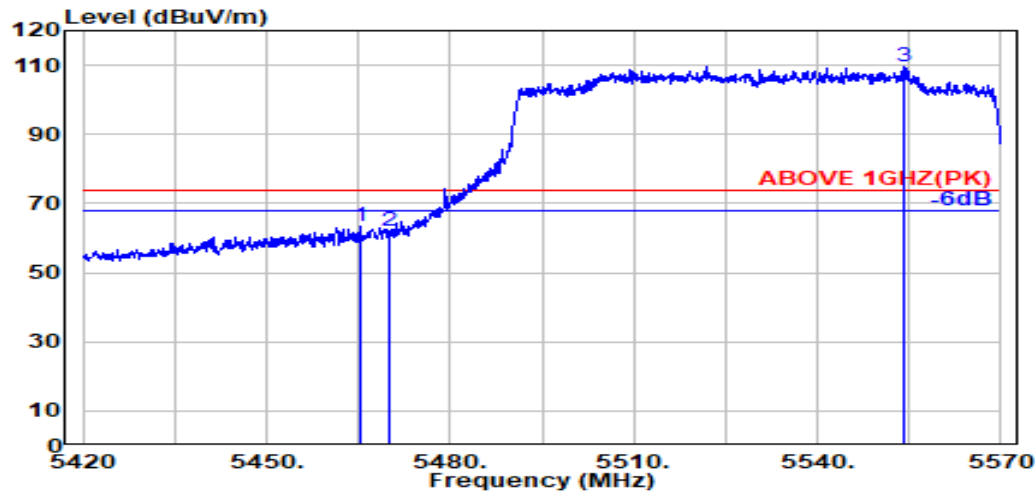

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.17	8.73	34.18	54.54	63.26	74.00	10.74	Peak
5470.000	34.16	8.74	34.18	53.11	61.83	74.00	12.17	Peak
@ 5554.100	34.09	8.78	34.20	100.90	109.58	---	---	Peak

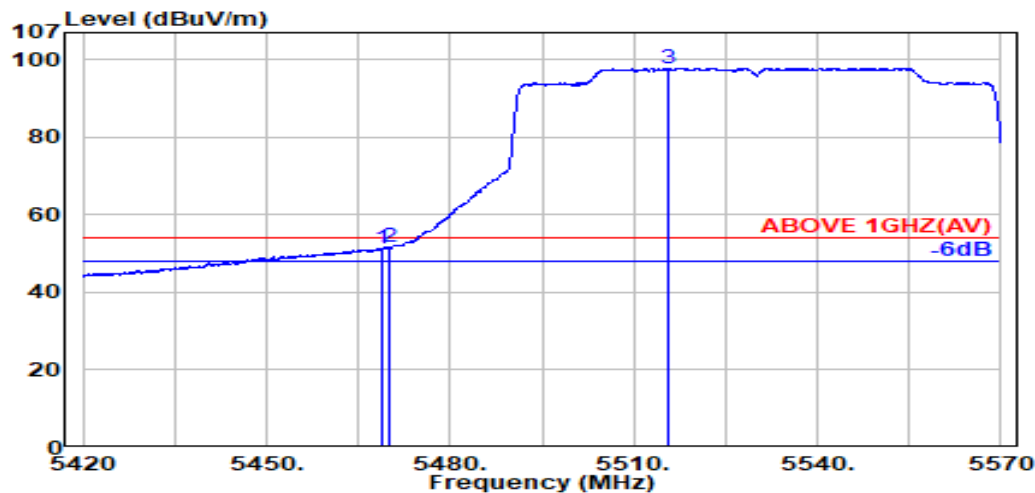

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	42.65	51.37	54.00	2.63	Average
5470.000	34.16	8.74	34.18	42.81	51.53	54.00	2.47	Average
@ 5515.800	34.10	8.76	34.18	89.22	97.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

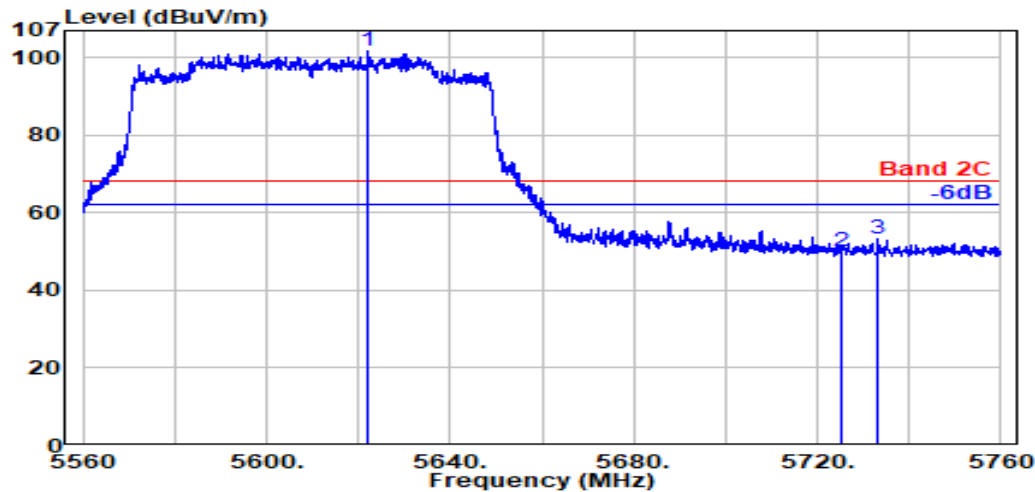

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.100	34.00	8.82	34.23	93.18	101.78	---	---	Peak
5725.000	33.80	8.88	34.28	41.83	50.23	68.20	17.97	Peak
5733.200	33.80	8.89	34.28	44.80	53.20	68.20	15.00	Peak

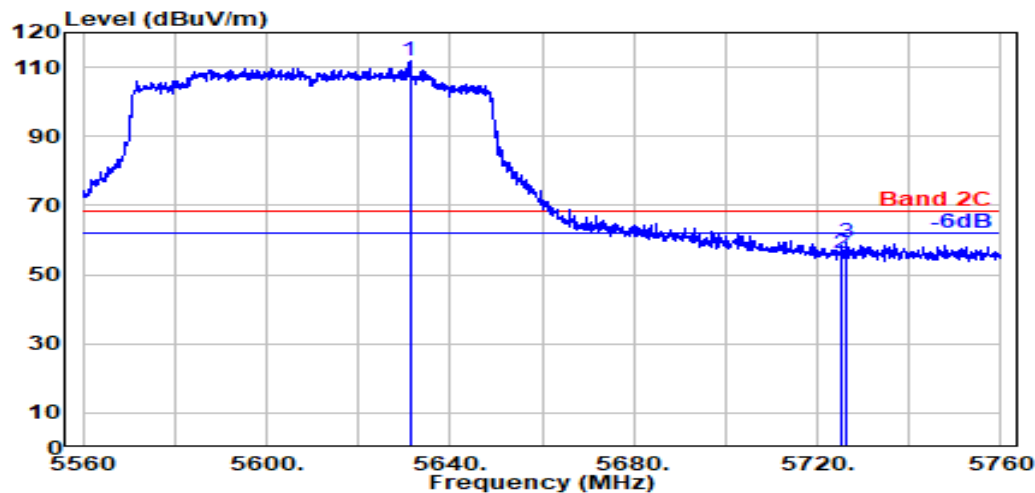

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5631.200	34.00	8.83	34.23	103.14	111.74	---	---	Peak
5725.000	33.80	8.88	34.28	47.67	56.08	68.20	12.12	Peak
5726.500	33.80	8.88	34.28	51.04	59.44	68.20	8.76	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

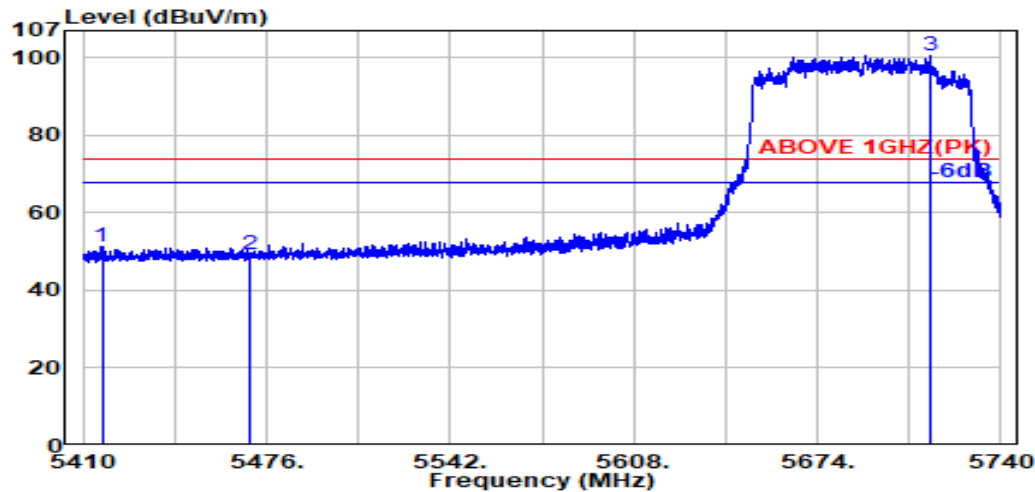

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.800	34.13	8.70	34.20	42.67	51.31	74.00	22.69	Peak
5470.000	34.16	8.74	34.18	40.47	49.18	74.00	24.82	Peak
@ 5714.600	33.80	8.87	34.27	92.25	100.65	---	---	Peak

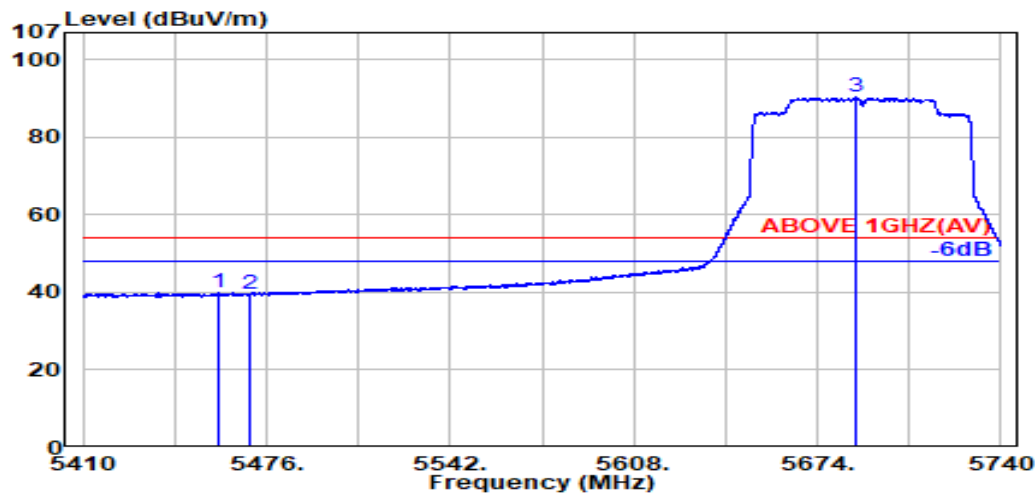

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.600	34.18	8.73	34.18	31.19	39.92	54.00	14.08	Average
5470.000	34.16	8.74	34.18	30.84	39.55	54.00	14.45	Average
@ 5687.800	33.85	8.86	34.26	81.81	90.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

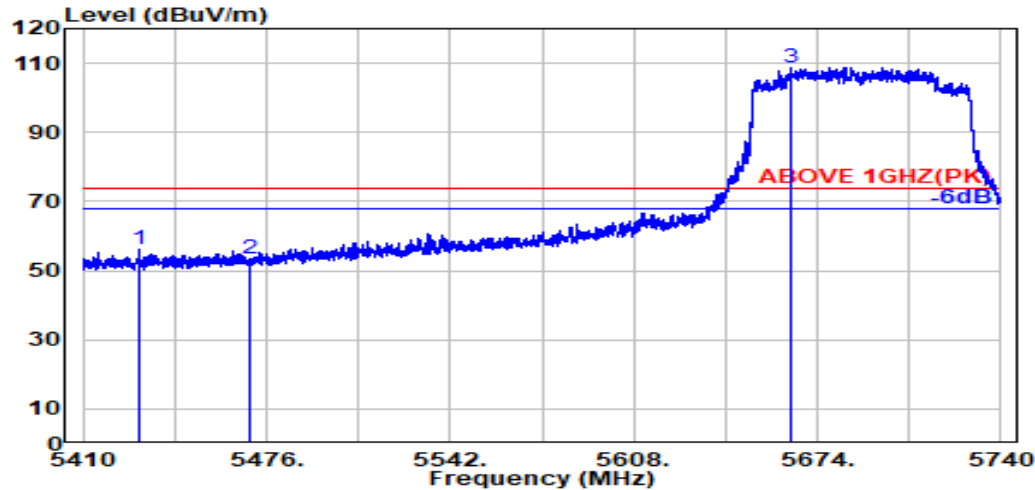

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.300	34.16	8.71	34.19	47.56	56.25	74.00	17.75	Peak
5470.000	34.16	8.74	34.18	44.68	53.39	74.00	20.61	Peak
@ 5664.400	33.94	8.85	34.25	100.26	108.80	---	---	Peak

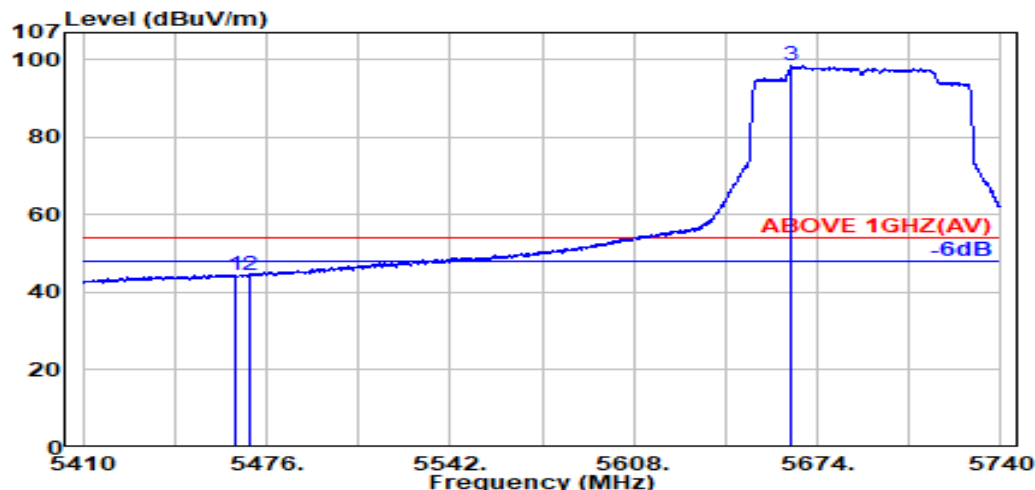

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.17	8.73	34.18	35.88	44.60	54.00	9.40	Average
5470.000	34.16	8.74	34.18	35.52	44.24	54.00	9.76	Average
@ 5664.900	33.94	8.85	34.25	89.87	98.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

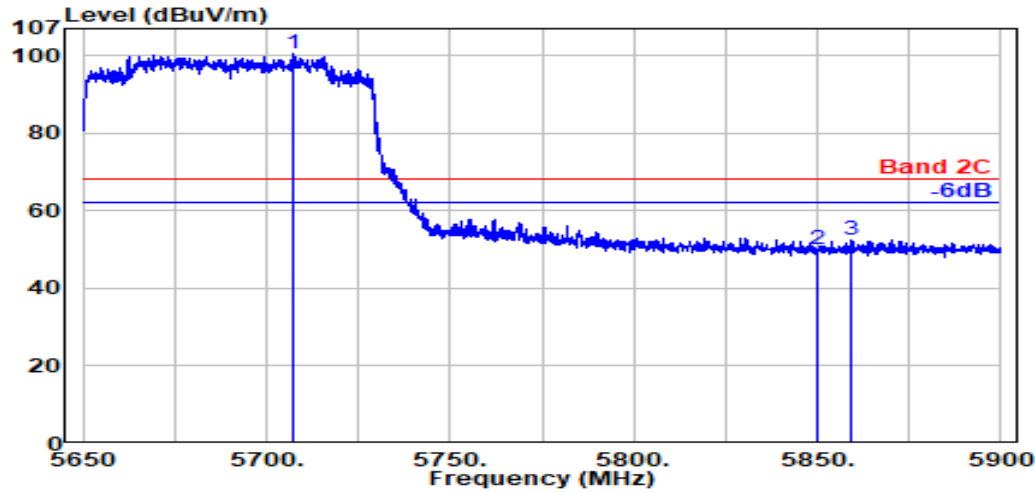

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.000	33.80	8.87	34.27	91.98	100.38	---	---	Peak
5850.000	34.10	8.95	34.33	41.39	50.10	68.20	18.10	Peak
5859.400	34.10	8.95	34.34	43.91	52.63	68.20	15.57	Peak

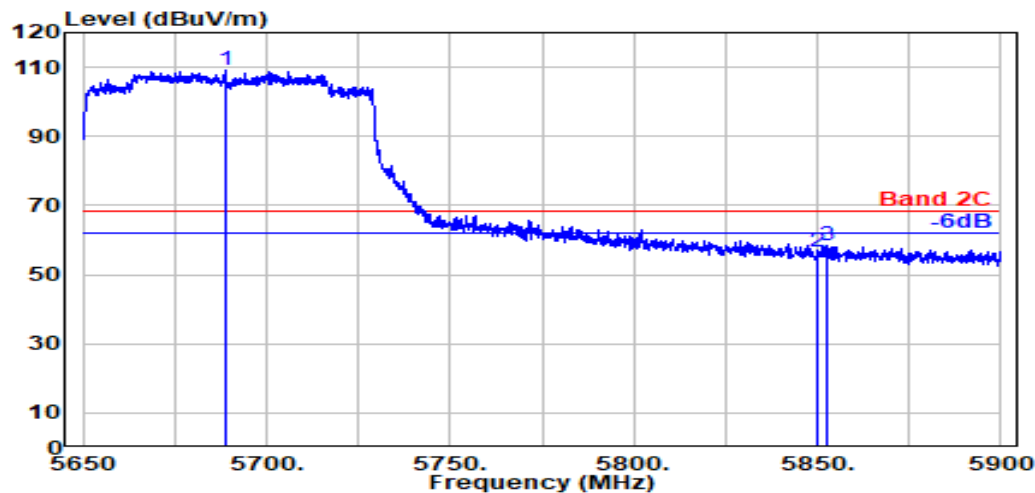

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.900	33.84	8.86	34.26	100.88	109.33	---	---	Peak
5850.000	34.10	8.95	34.33	47.78	56.50	68.20	11.70	Peak
5852.900	34.10	8.95	34.33	49.58	58.29	68.20	9.91	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

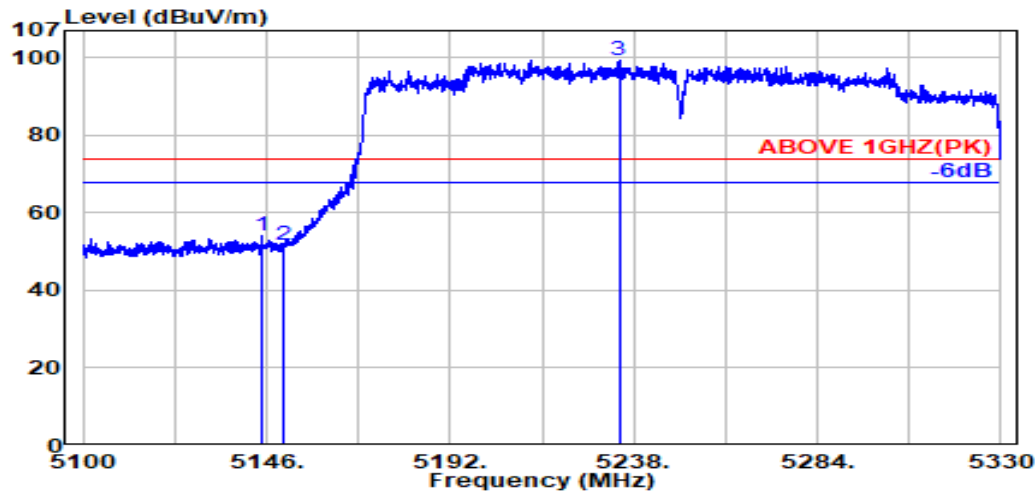

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	33.70	8.54	34.28	46.13	54.09	74.00	19.91	Peak
5150.000	33.70	8.54	34.28	43.57	51.53	74.00	22.47	Peak
@ 5234.300	33.77	8.60	34.25	91.38	99.49	---	---	Peak

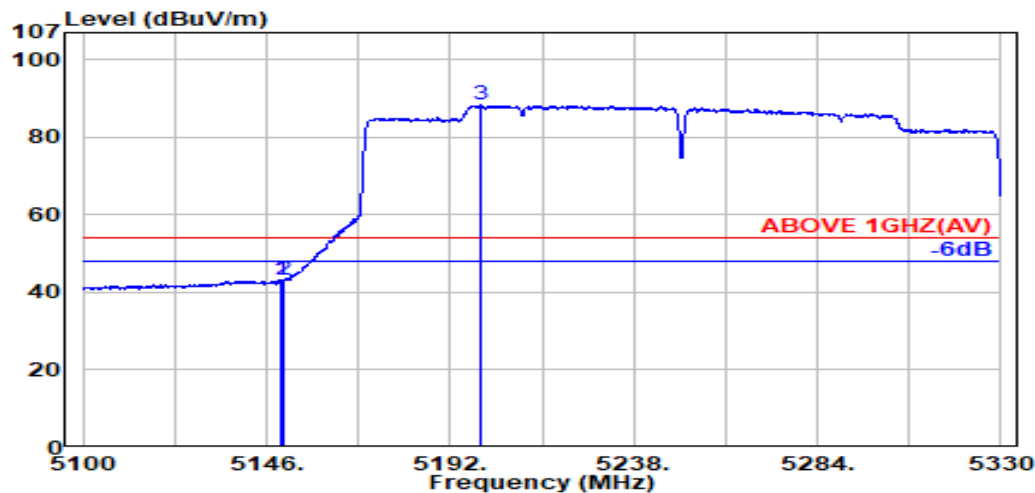

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.70	8.54	34.28	35.21	43.17	54.00	10.83	Average
5150.000	33.70	8.54	34.28	35.27	43.23	54.00	10.77	Average
@ 5199.500	33.70	8.57	34.26	80.22	88.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

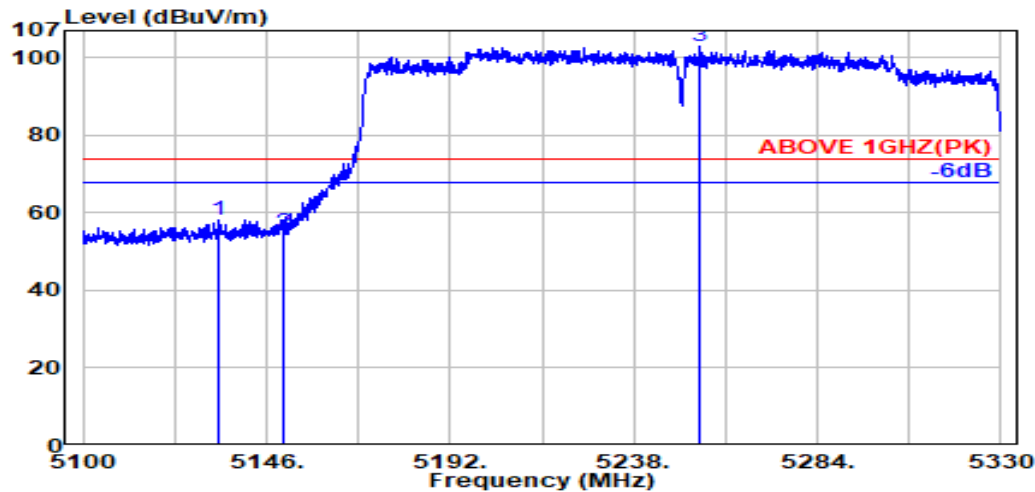

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5134.100	33.70	8.53	34.29	50.33	58.28	74.00	15.72	Peak
5150.000	33.70	8.54	34.28	46.94	54.90	74.00	19.10	Peak
@ 5254.400	33.83	8.61	34.25	94.81	103.00	---	---	Peak

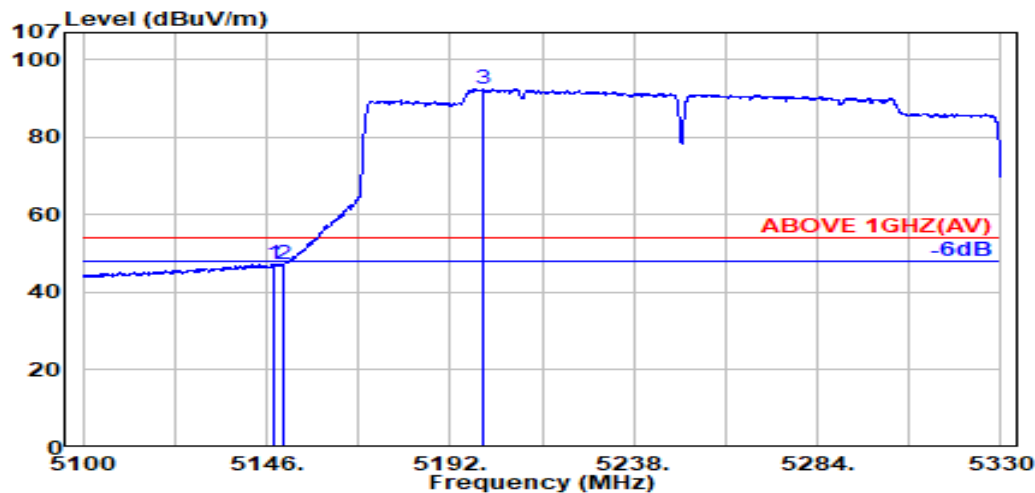

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.900	33.70	8.54	34.28	39.40	47.36	54.00	6.64	Average
5150.000	33.70	8.54	34.28	39.21	47.18	54.00	6.82	Average
@ 5200.300	33.70	8.57	34.26	84.57	92.58	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

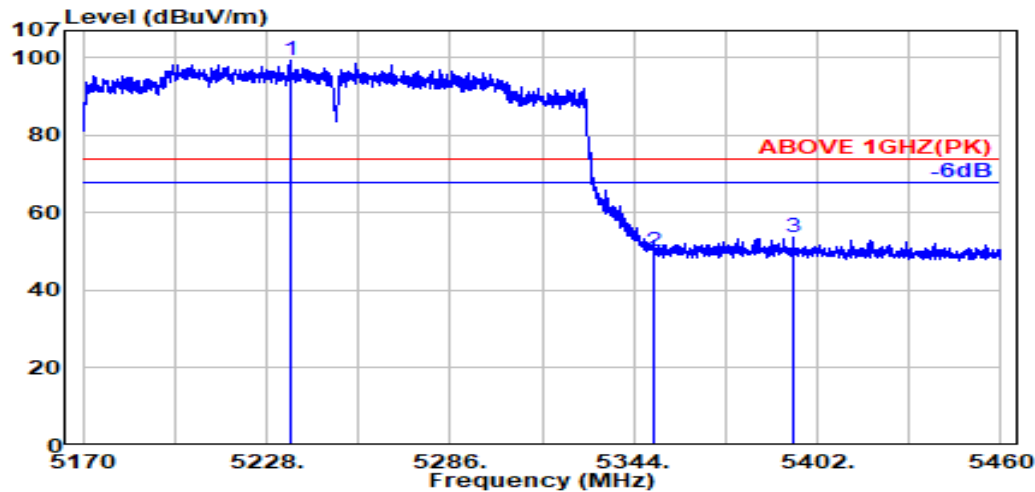

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5235.400	33.77	8.60	34.25	91.03	99.15	---	---	Peak
5350.000	33.90	8.67	34.22	41.71	50.06	74.00	23.94	Peak
5394.600	34.08	8.69	34.20	45.16	53.72	74.00	20.28	Peak

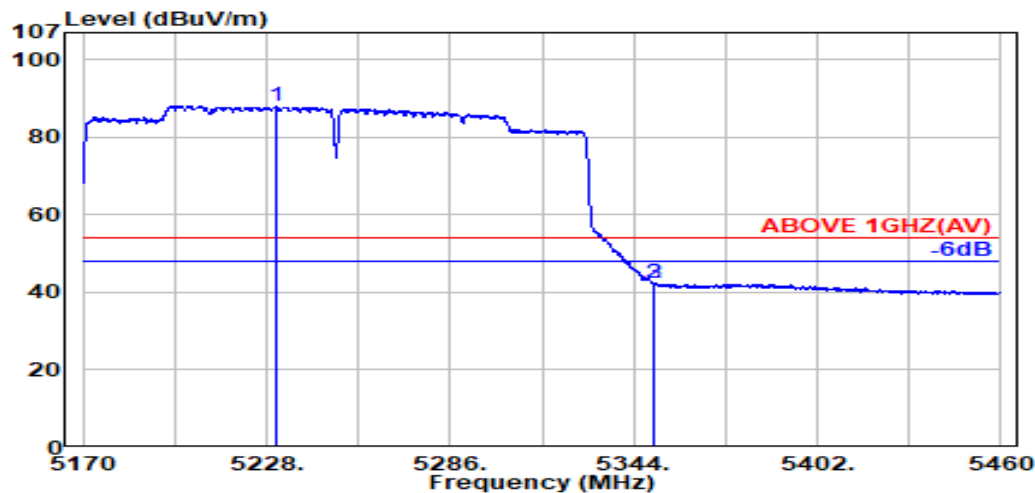

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.100	33.76	8.59	34.25	79.98	88.08	---	---	Average
5350.000	33.90	8.67	34.22	33.88	42.22	54.00	11.78	Average
5350.700	33.90	8.67	34.22	34.17	42.52	54.00	11.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

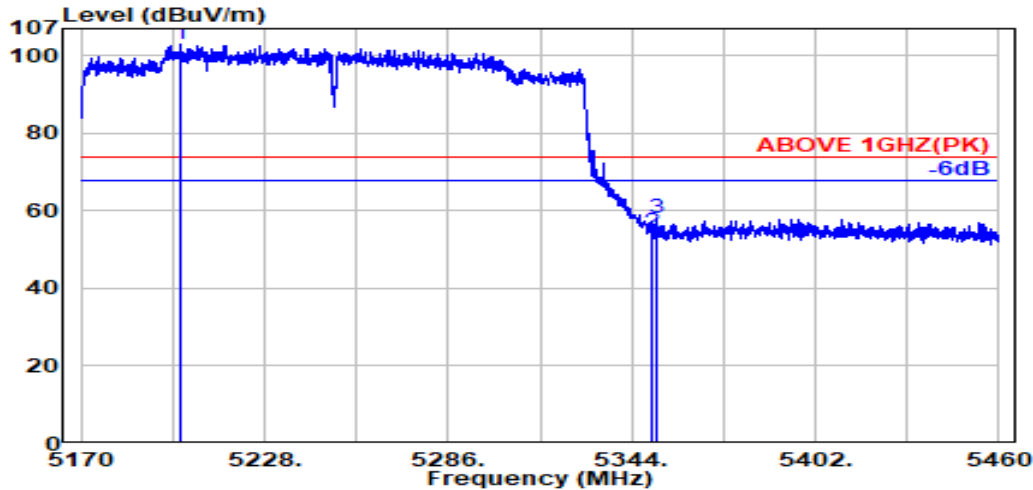

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5201.300	33.70	8.58	34.26	94.90	102.92	---	---	Peak
5350.000	33.90	8.67	34.22	46.36	54.70	74.00	19.30	Peak
5352.000	33.91	8.67	34.22	49.83	58.19	74.00	15.81	Peak

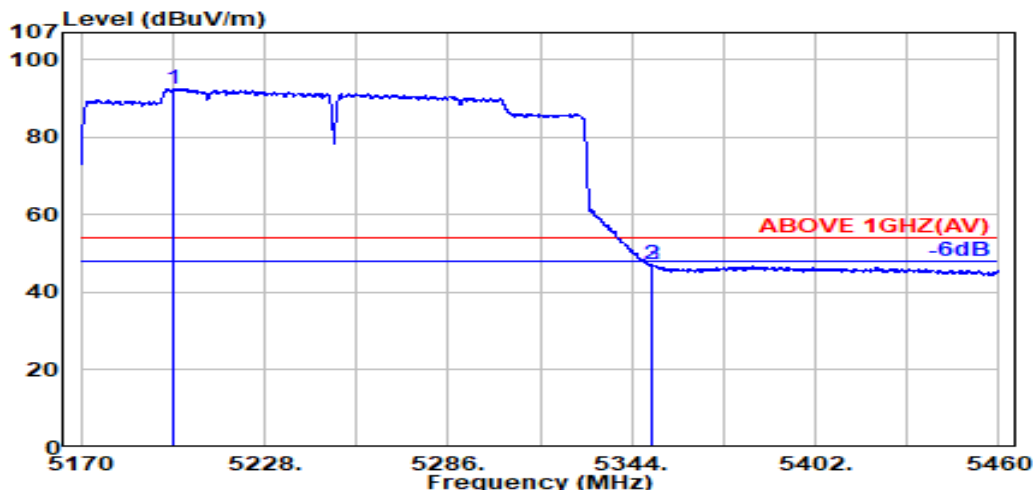

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5199.200	33.70	8.57	34.26	84.53	92.54	---	---	Average
5350.000	33.90	8.67	34.22	38.82	47.16	54.00	6.84	Average
5350.200	33.90	8.67	34.22	38.73	47.08	54.00	6.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

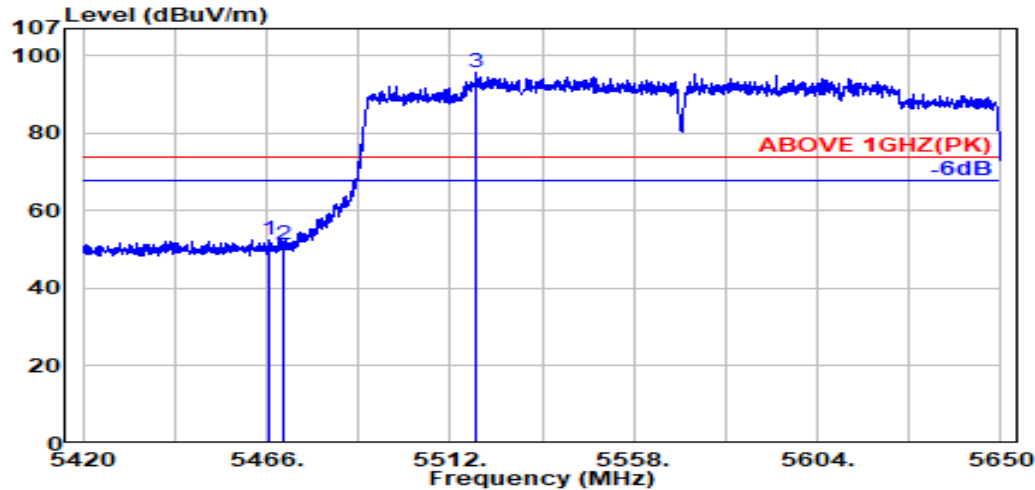

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.17	8.73	34.18	43.86	52.58	74.00	21.42	Peak
5470.000	34.16	8.74	34.18	42.72	51.44	74.00	22.56	Peak
@ 5518.600	34.10	8.76	34.18	87.17	95.85	---	---	Peak

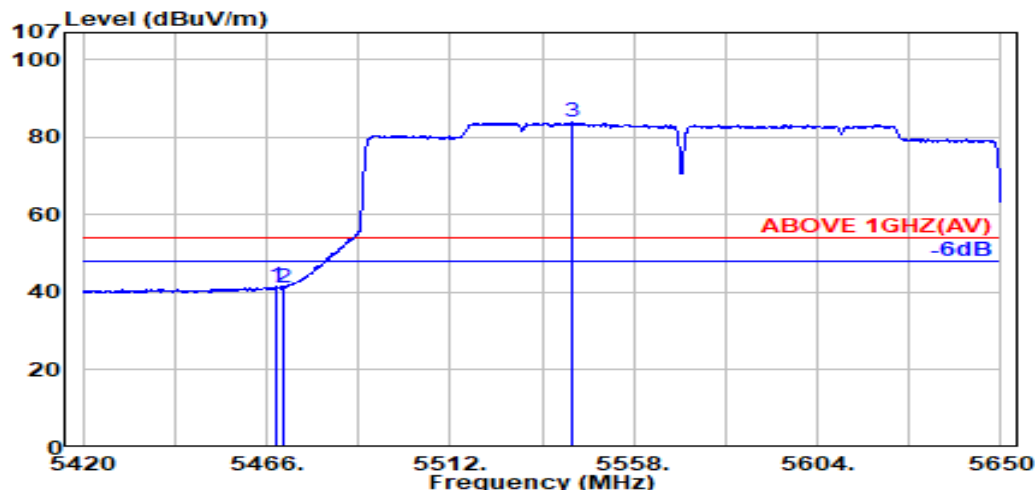

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	32.86	41.58	54.00	12.42	Average
5470.000	34.16	8.74	34.18	32.57	41.29	54.00	12.71	Average
@ 5542.600	34.10	8.78	34.19	75.24	83.93	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

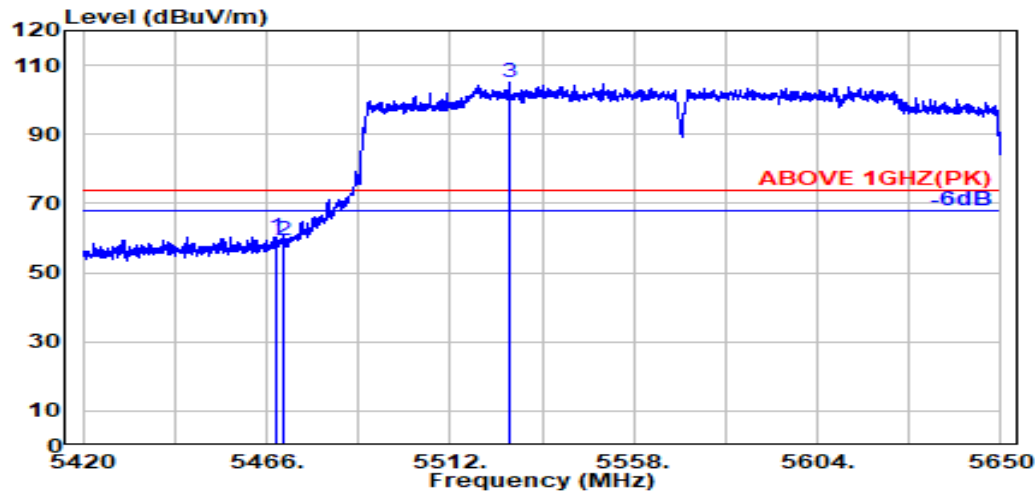

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	51.72	60.43	74.00	13.57	Peak
5470.000	34.16	8.74	34.18	50.71	59.43	74.00	14.57	Peak
@ 5527.000	34.10	8.77	34.18	96.57	105.26	---	---	Peak

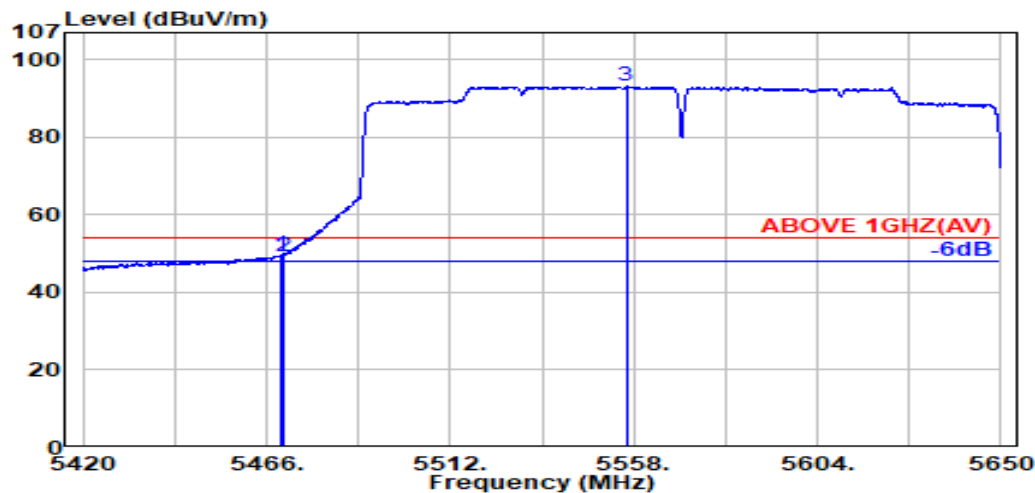

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.16	8.74	34.18	40.96	49.68	54.00	4.32	Average
5470.000	34.16	8.74	34.18	40.72	49.44	54.00	4.56	Average
@ 5556.100	34.09	8.79	34.20	84.46	93.14	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

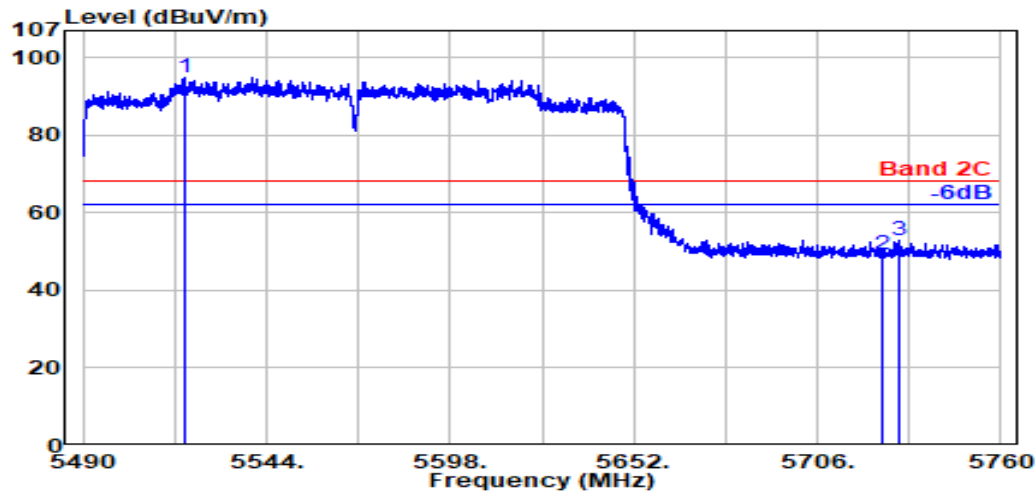

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5520.000	34.10	8.76	34.18	86.20	94.89	---	---	Peak
5725.000	33.80	8.88	34.28	40.69	49.10	68.20	19.10	Peak
5730.100	33.80	8.88	34.28	44.31	52.72	68.20	15.48	Peak

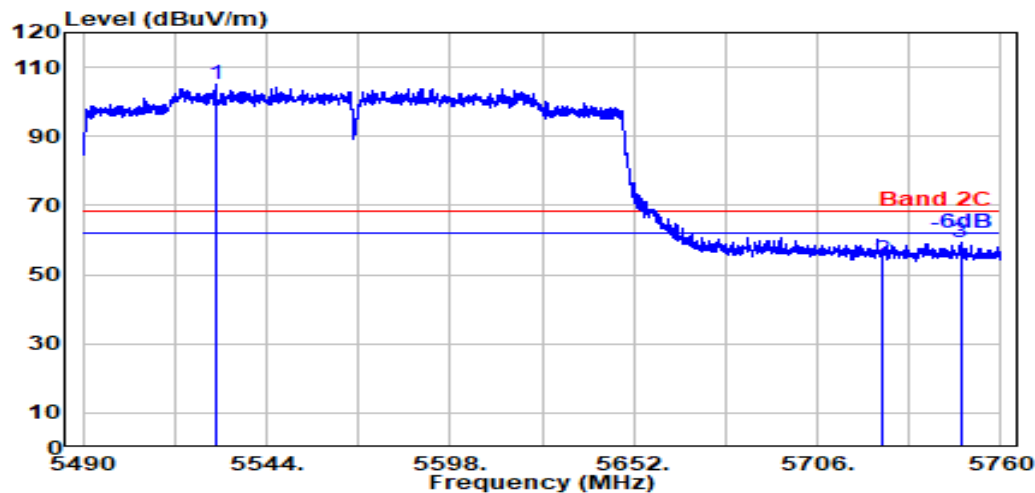

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5529.300	34.10	8.77	34.18	96.21	104.89	---	---	Peak
5725.000	33.80	8.88	34.28	45.94	54.34	68.20	13.86	Peak
5748.100	33.80	8.89	34.29	50.97	59.37	68.20	8.83	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

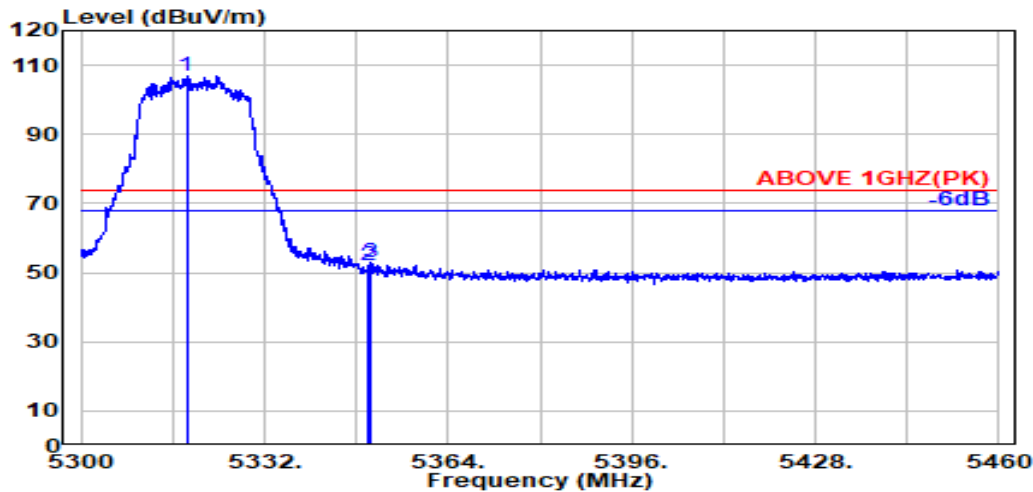

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	34.03	8.65	34.23	98.41	106.85	---	---	Peak
5350.000	33.90	8.67	34.22	43.88	52.23	74.00	21.77	Peak
5350.500	33.90	8.67	34.22	44.50	52.86	74.00	21.14	Peak

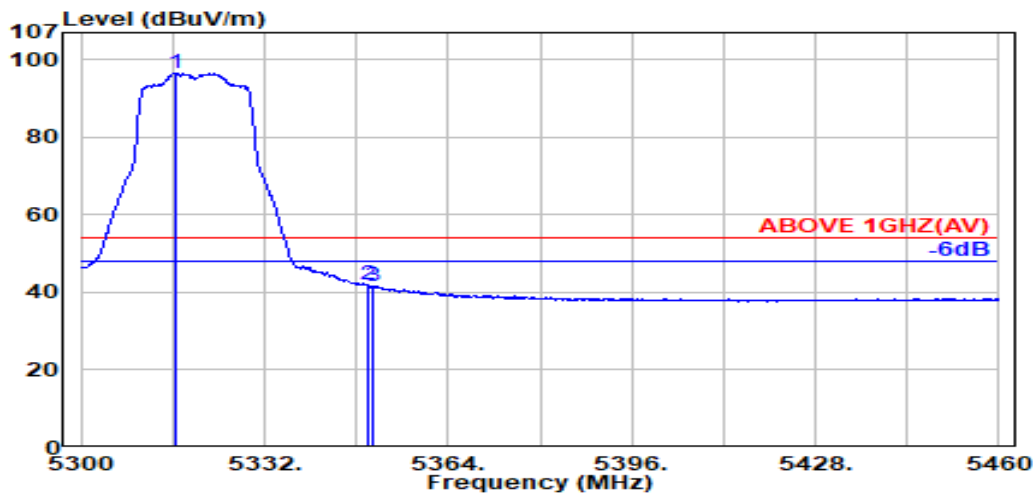

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.700	34.03	8.65	34.23	88.10	96.55	---	---	Average
5350.000	33.90	8.67	34.22	33.69	42.04	54.00	11.96	Average
5350.900	33.90	8.67	34.22	33.28	41.64	54.00	12.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

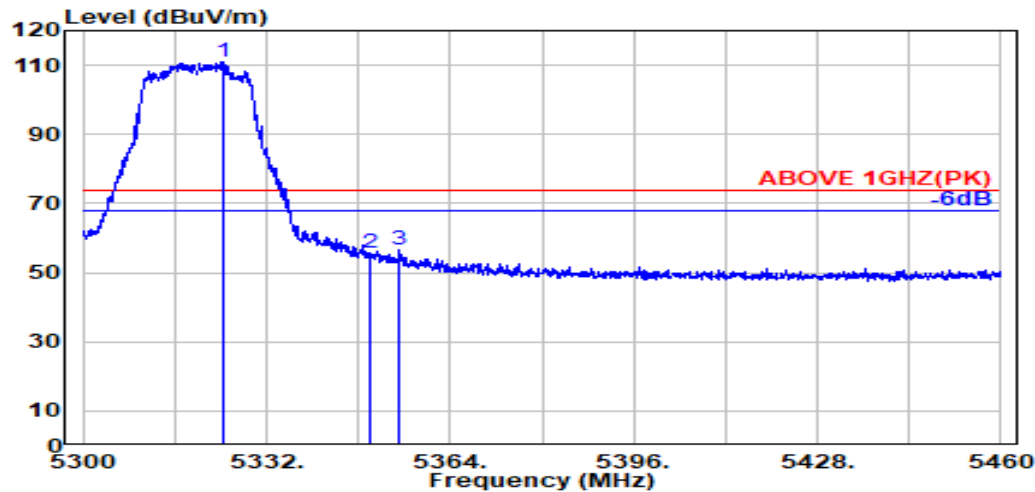

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.400	34.00	8.65	34.22	102.73	111.16	---	---	Peak
5350.000	33.90	8.67	34.22	47.40	55.75	74.00	18.25	Peak
5355.000	33.92	8.67	34.21	48.16	56.53	74.00	17.47	Peak

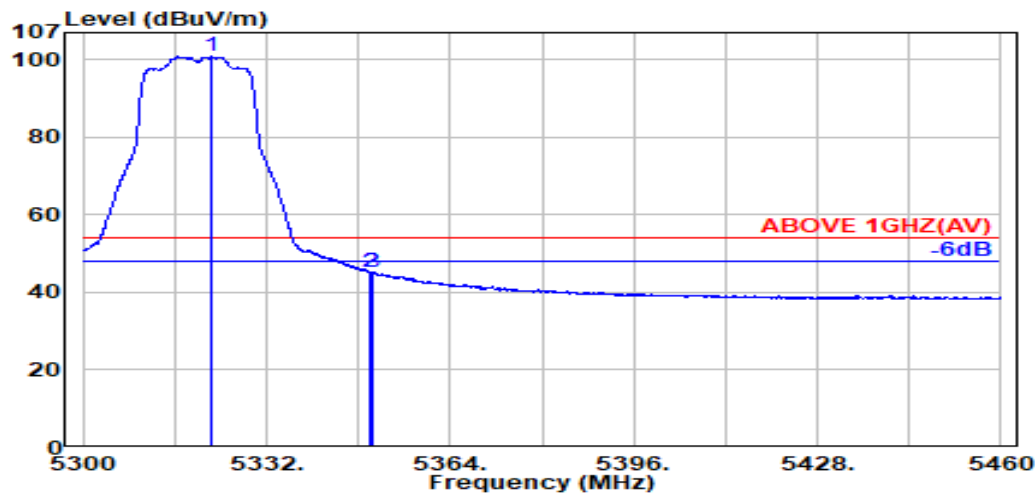

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.300	34.01	8.65	34.23	92.32	100.76	---	---	Average
5350.000	33.90	8.67	34.22	36.94	45.29	54.00	8.71	Average
5350.600	33.90	8.67	34.22	36.85	45.21	54.00	8.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

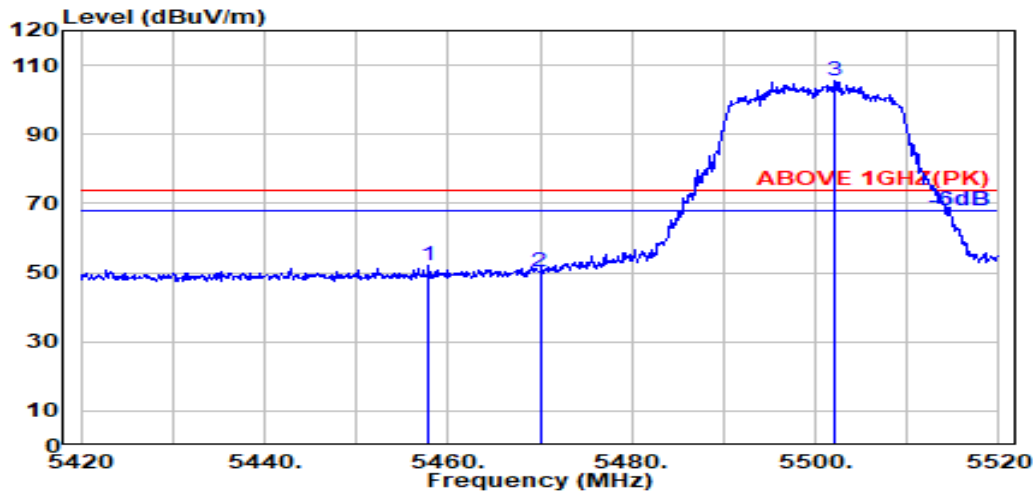

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.900	34.18	8.73	34.18	43.17	51.90	74.00	22.10	Peak
5470.000	34.16	8.74	34.18	41.37	50.08	74.00	23.92	Peak
@ 5502.200	34.10	8.75	34.17	96.68	105.36	---	---	Peak

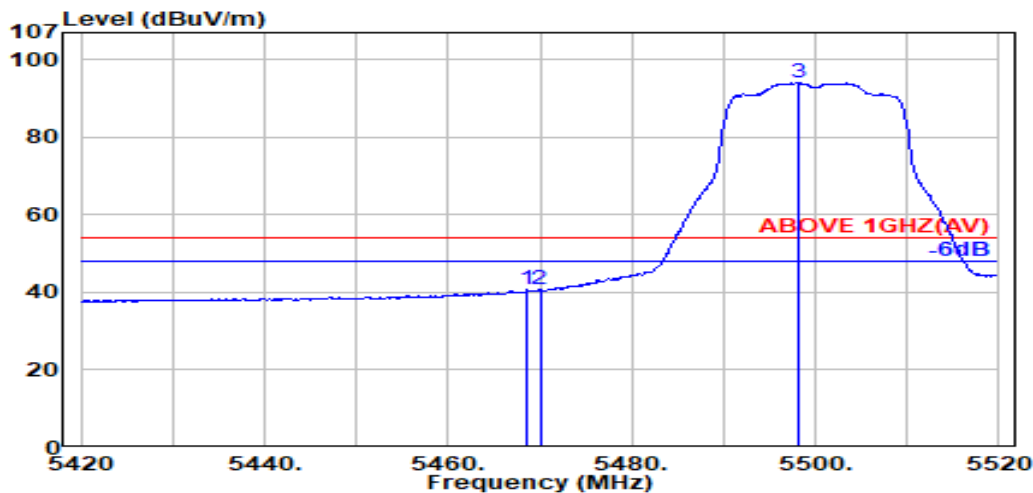

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	31.86	40.58	54.00	13.42	Average
5470.000	34.16	8.74	34.18	31.87	40.59	54.00	13.41	Average
@ 5498.100	34.10	8.75	34.17	85.50	94.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

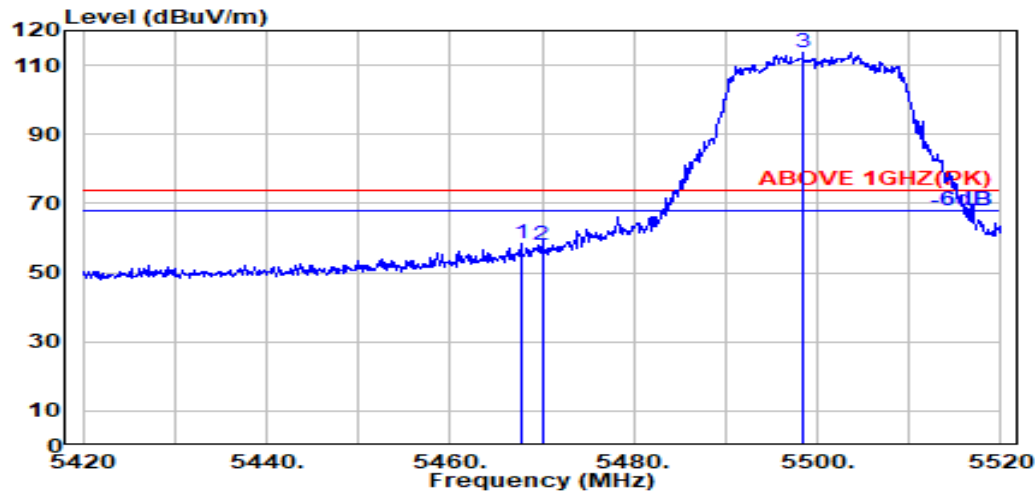

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.16	8.73	34.18	49.59	58.31	74.00	15.69	Peak
5470.000	34.16	8.74	34.18	49.37	58.09	74.00	15.91	Peak
@ 5498.400	34.10	8.75	34.17	105.18	113.87	---	---	Peak

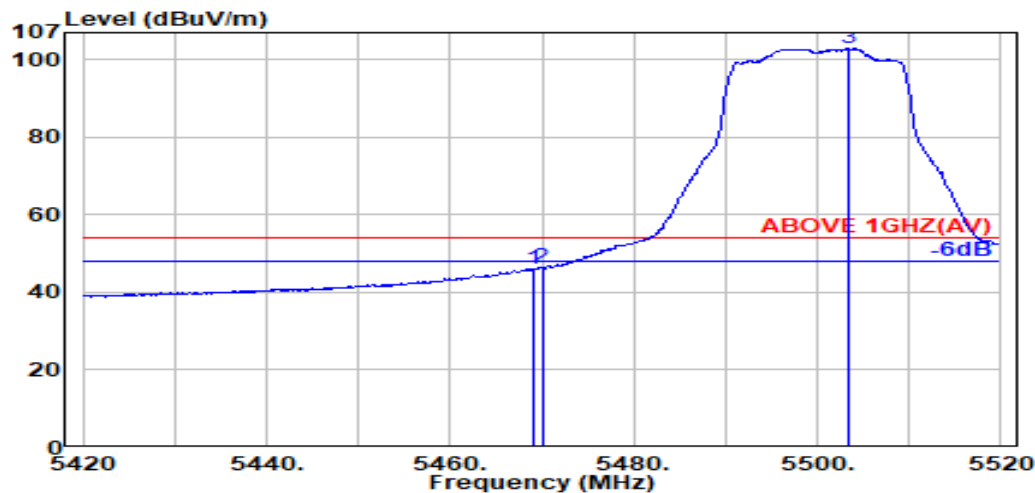

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	37.34	46.06	54.00	7.94	Average
5470.000	34.16	8.74	34.18	37.74	46.46	54.00	7.54	Average
@ 5503.400	34.10	8.76	34.17	94.25	102.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

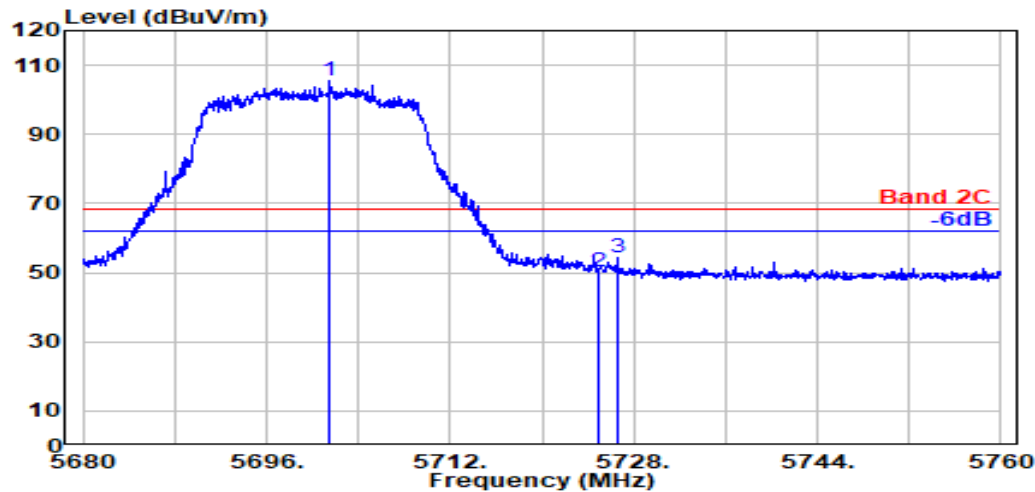

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.450	33.80	8.87	34.27	97.15	105.56	---	---	Peak
5725.000	33.80	8.88	34.28	41.72	50.13	68.20	18.07	Peak
5726.650	33.80	8.88	34.28	46.10	54.51	68.20	13.69	Peak

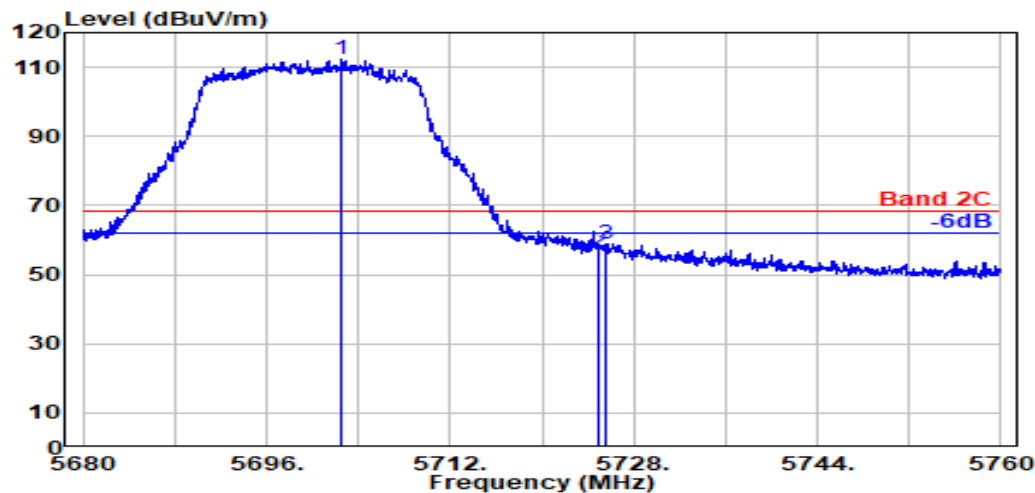

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.500	33.80	8.87	34.27	103.74	112.14	---	---	Peak
5725.000	33.80	8.88	34.28	48.42	56.83	68.20	11.37	Peak
5725.650	33.80	8.88	34.28	50.66	59.06	68.20	9.14	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

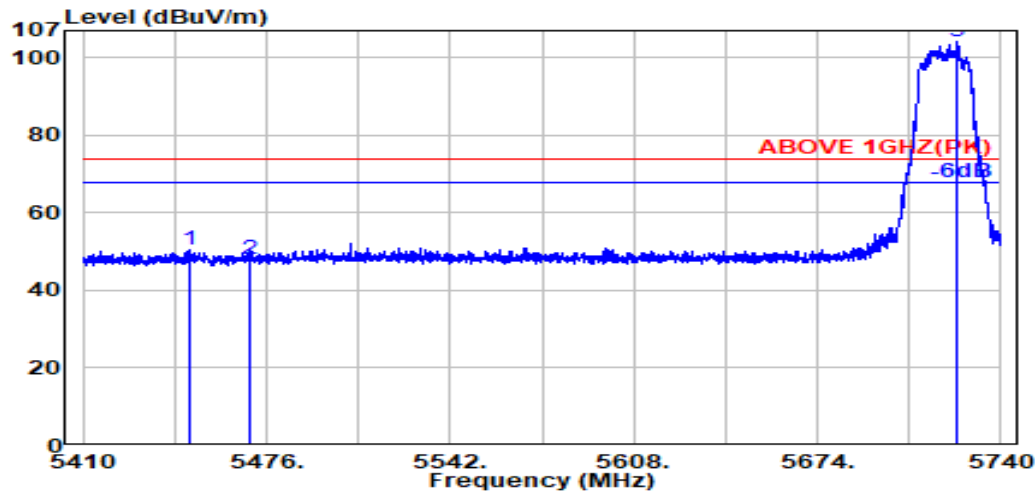

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.400	34.20	8.72	34.19	41.54	50.27	74.00	23.73	Peak
5470.000	34.16	8.74	34.18	39.18	47.90	74.00	26.10	Peak
@ 5724.400	33.80	8.88	34.28	95.61	104.01	---	---	Peak

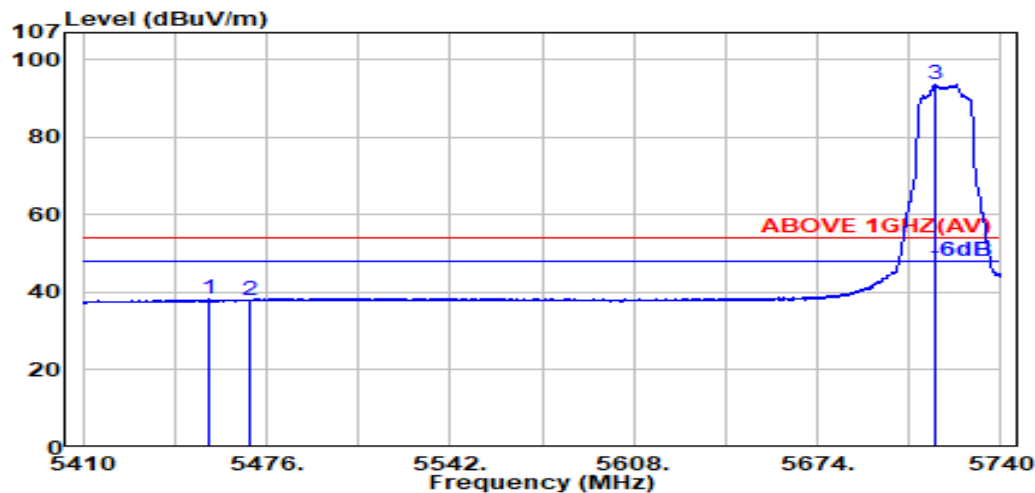

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.000	34.19	8.73	34.18	29.47	38.20	54.00	15.80	Average
5470.000	34.16	8.74	34.18	29.33	38.04	54.00	15.96	Average
@ 5716.200	33.80	8.88	34.27	85.18	93.59	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

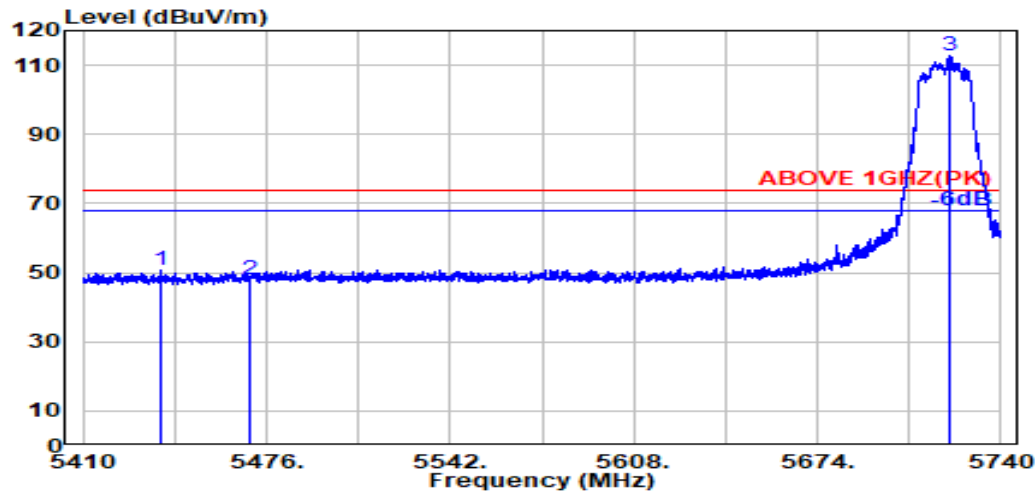

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.100	34.18	8.72	34.19	41.96	50.67	74.00	23.33	Peak
5470.000	34.16	8.74	34.18	39.06	47.78	74.00	26.22	Peak
@ 5721.700	33.80	8.88	34.27	104.14	112.55	---	---	Peak

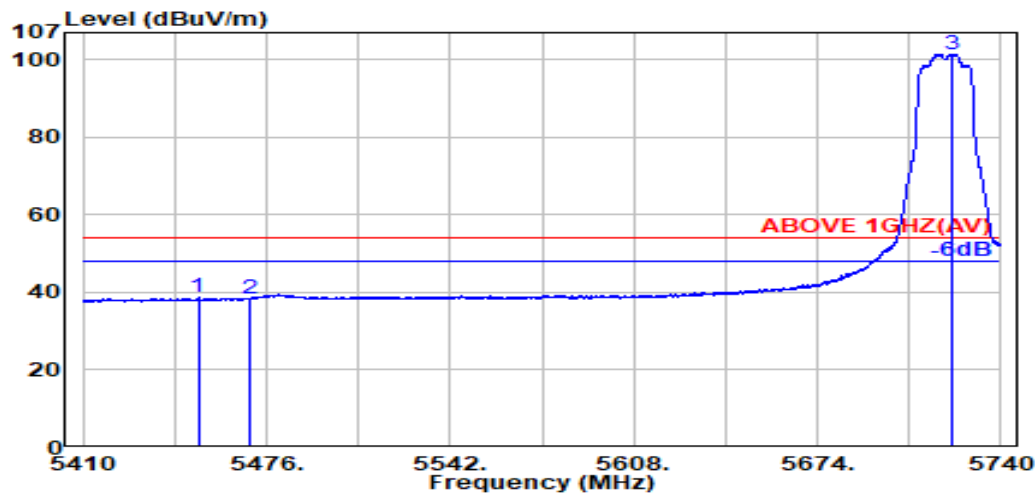

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.400	34.20	8.72	34.18	29.88	38.62	54.00	15.38	Average
5470.000	34.16	8.74	34.18	29.66	38.38	54.00	15.62	Average
@ 5722.200	33.80	8.88	34.27	92.98	101.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

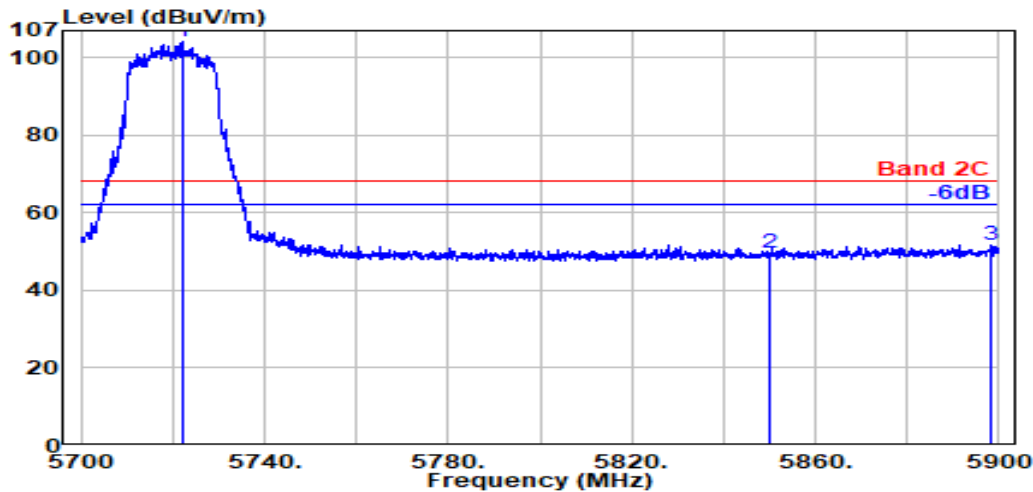

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.000	33.80	8.88	34.27	95.75	104.16	---	---	Peak
5850.000	34.10	8.95	34.33	40.88	49.60	68.20	18.60	Peak
5898.200	34.10	8.98	34.35	42.97	51.69	68.20	16.51	Peak

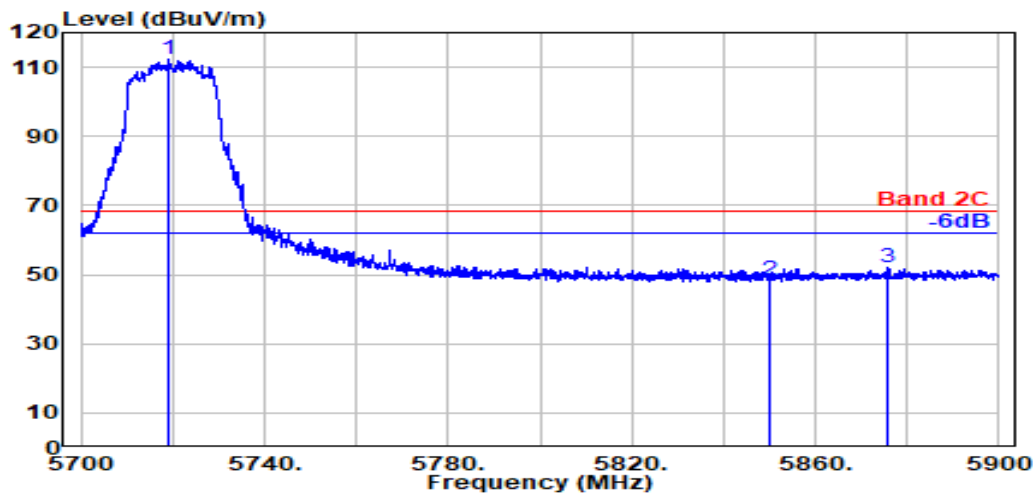

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.200	33.80	8.88	34.27	104.06	112.46	---	---	Peak
5850.000	34.10	8.95	34.33	39.58	48.30	68.20	19.90	Peak
5875.800	34.10	8.96	34.34	43.42	52.14	68.20	16.06	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

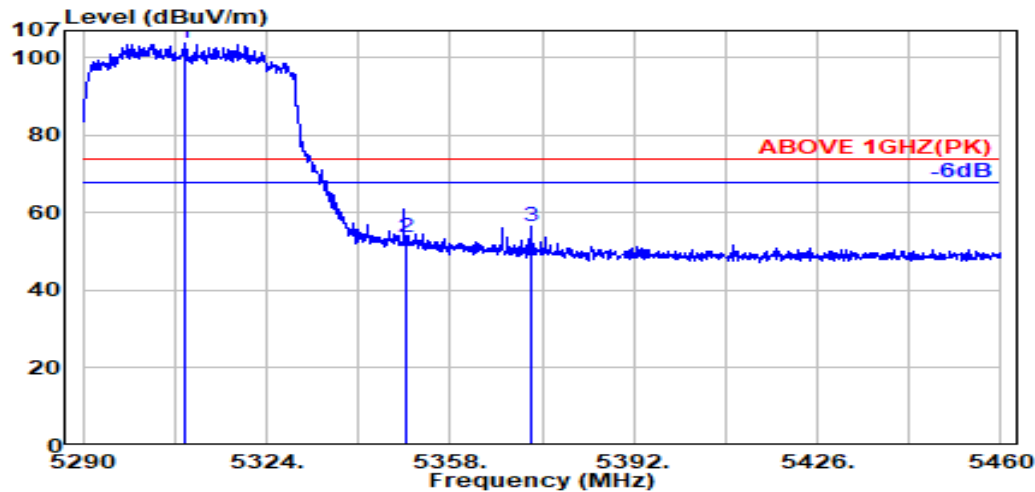

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.700	34.07	8.64	34.23	95.26	103.74	---	---	Peak
5350.000	33.90	8.67	34.22	45.43	53.78	74.00	20.22	Peak
5372.900	33.99	8.68	34.21	48.11	56.58	74.00	17.42	Peak

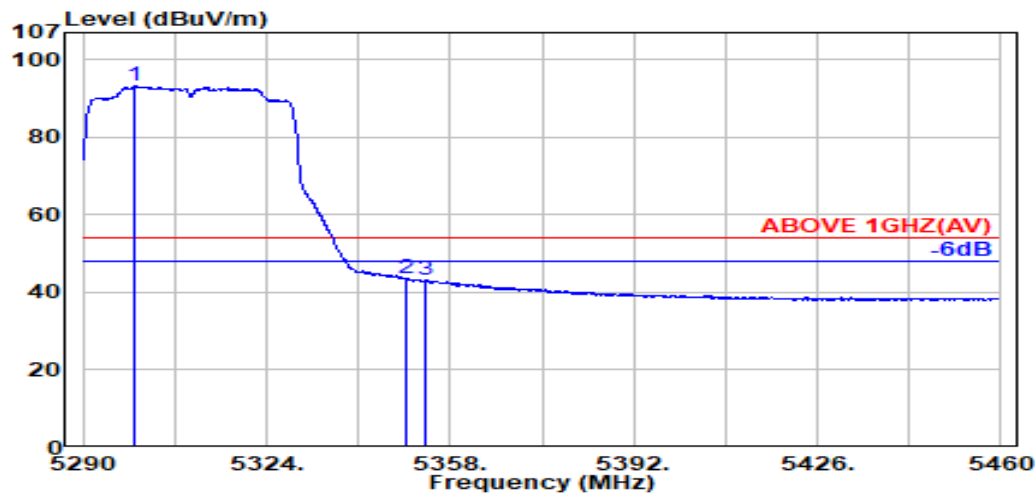

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.700	34.10	8.64	34.23	84.66	93.16	---	---	Average
5350.000	33.90	8.67	34.22	35.21	43.56	54.00	10.44	Average
5353.600	33.91	8.67	34.22	35.03	43.39	54.00	10.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

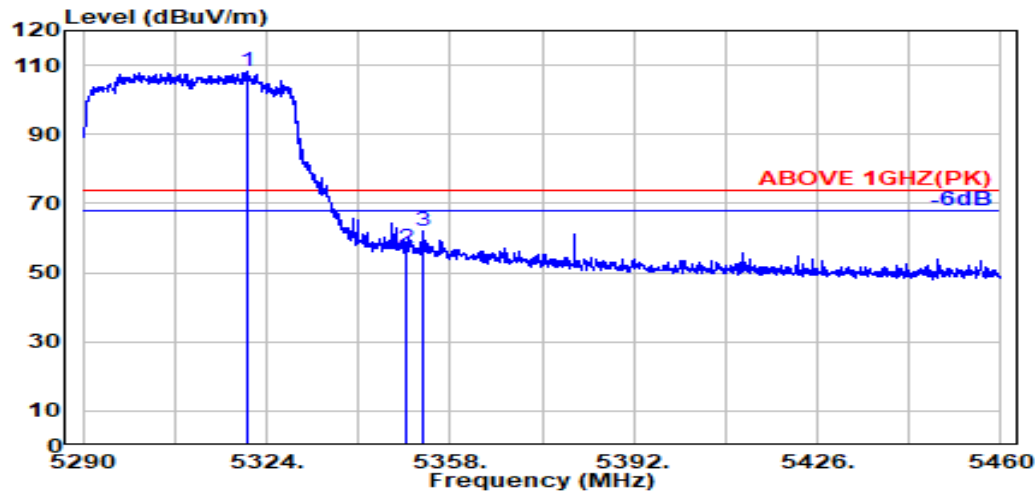

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.300	34.02	8.65	34.23	99.76	108.20	---	---	Peak
5350.000	33.90	8.67	34.22	48.75	57.10	74.00	16.90	Peak
5352.900	33.91	8.67	34.22	53.48	61.84	74.00	12.16	Peak

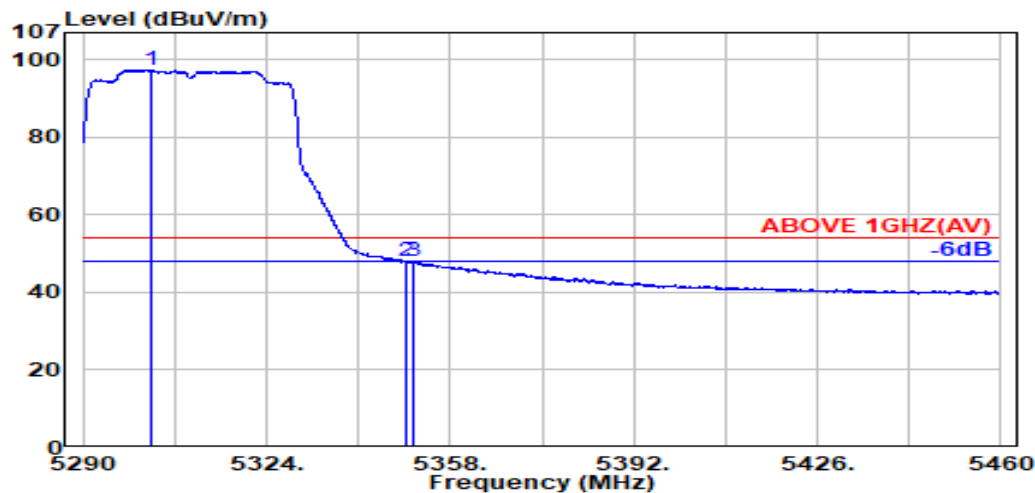

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.800	34.09	8.64	34.23	88.88	97.38	---	---	Average
5350.000	33.90	8.67	34.22	39.68	48.03	54.00	5.97	Average
5351.100	33.90	8.67	34.22	39.65	48.00	54.00	6.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

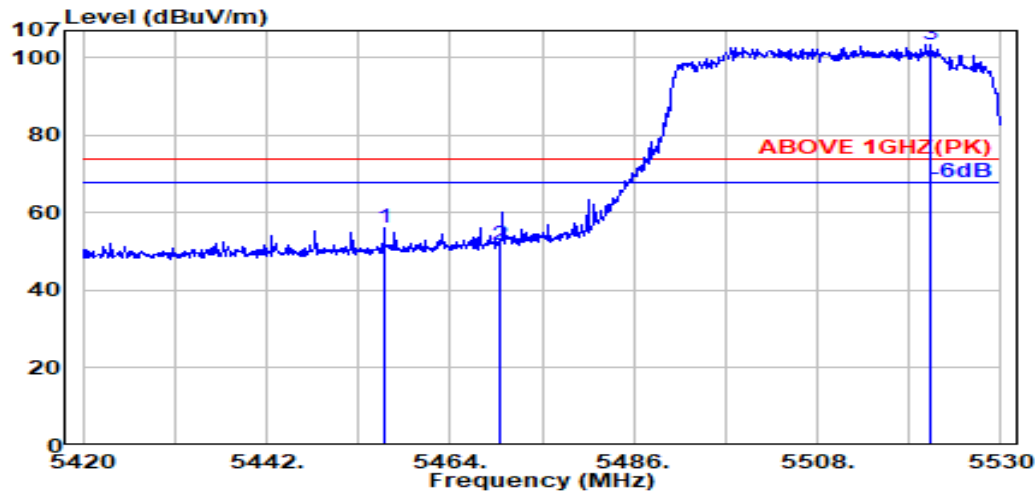

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.100	34.19	8.73	34.18	47.50	56.23	74.00	17.77	Peak
5470.000	34.16	8.74	34.18	43.15	51.87	74.00	22.14	Peak
@ 5521.600	34.10	8.77	34.18	94.60	103.28	---	---	Peak

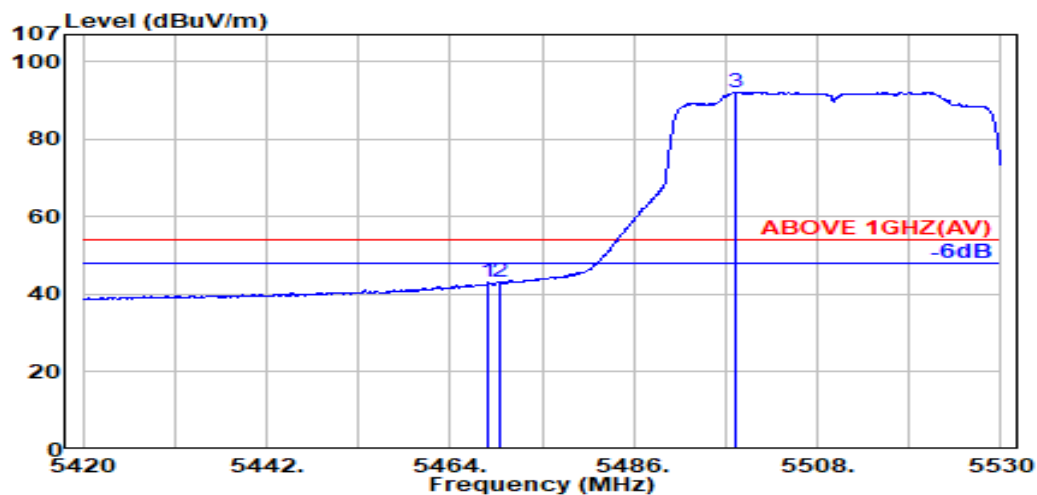

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	34.34	43.06	54.00	10.94	Average
5470.000	34.16	8.74	34.18	34.41	43.12	54.00	10.88	Average
@ 5498.200	34.10	8.75	34.17	83.50	92.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

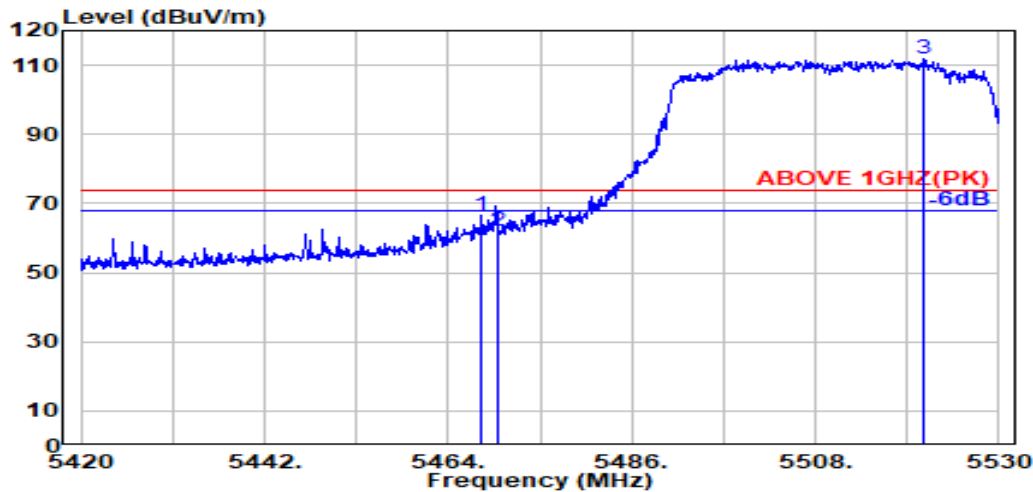

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	57.67	66.38	74.00	7.62	Peak
5470.000	34.16	8.74	34.18	53.52	62.24	74.00	11.76	Peak
@ 5520.900	34.10	8.77	34.18	103.05	111.73	---	---	Peak

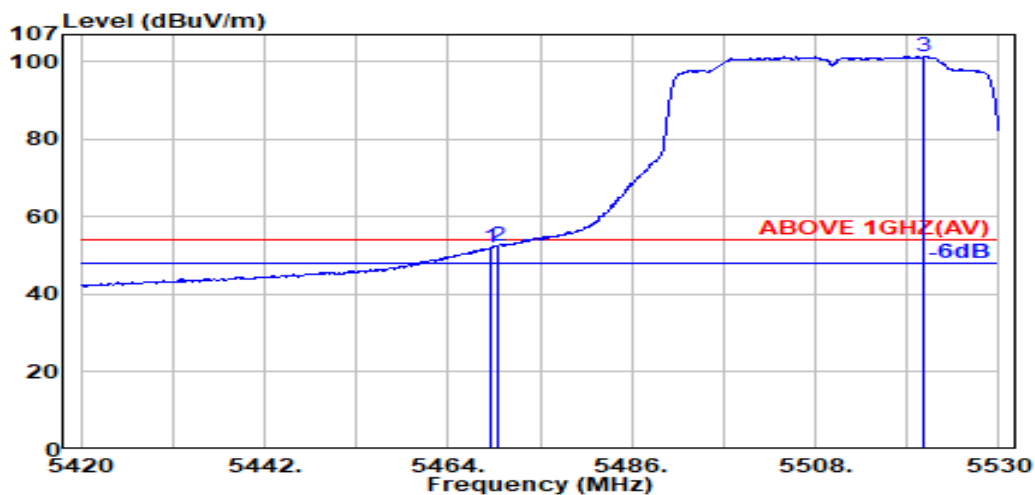

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	43.30	52.02	54.00	1.98	Average
5470.000	34.16	8.74	34.18	43.73	52.44	54.00	1.56	Average
@ 5520.900	34.10	8.77	34.18	92.74	101.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

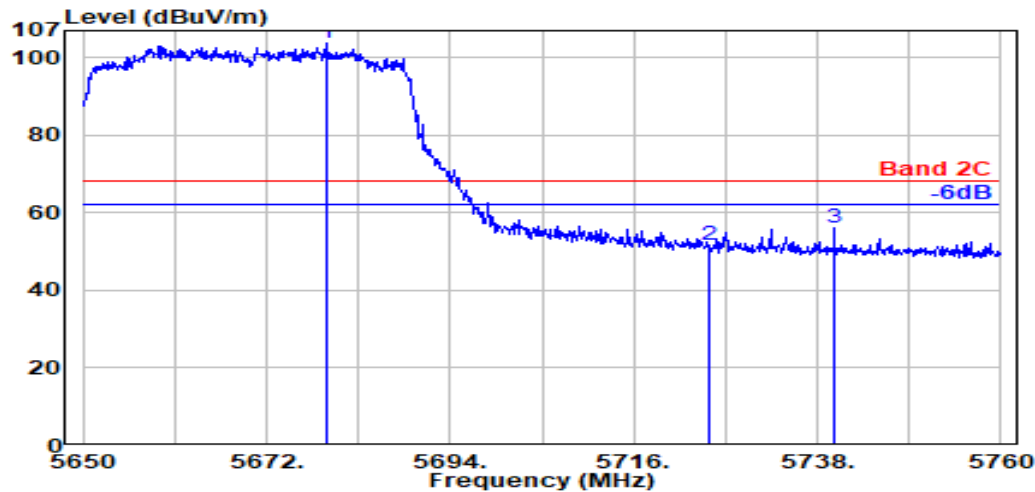

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.100	33.88	8.86	34.25	95.27	103.75	---	---	Peak
5725.000	33.80	8.88	34.28	43.16	51.56	68.20	16.64	Peak
5740.000	33.80	8.89	34.28	47.68	56.09	68.20	12.11	Peak

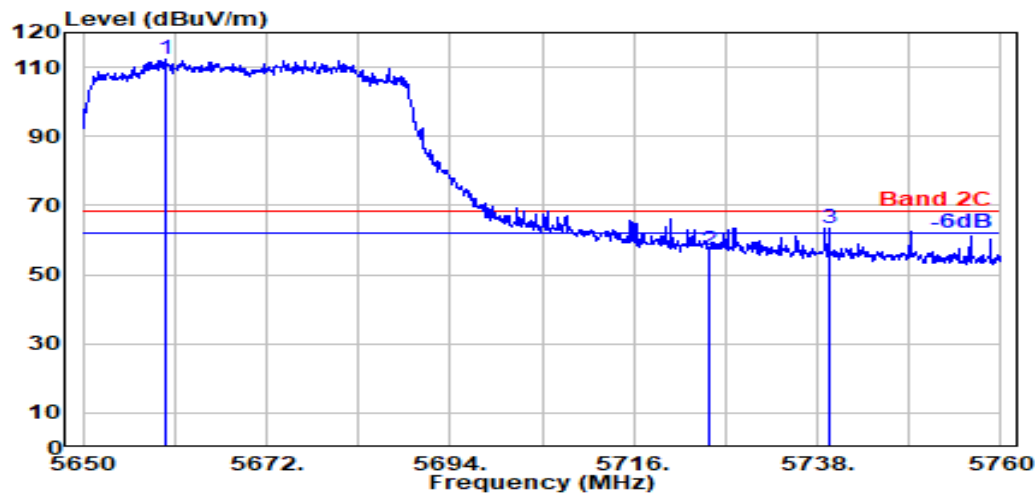

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.900	33.96	8.84	34.25	103.63	112.18	---	---	Peak
5725.000	33.80	8.88	34.28	48.79	57.19	68.20	11.01	Peak
5739.400	33.80	8.89	34.28	55.07	63.48	68.20	4.72	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

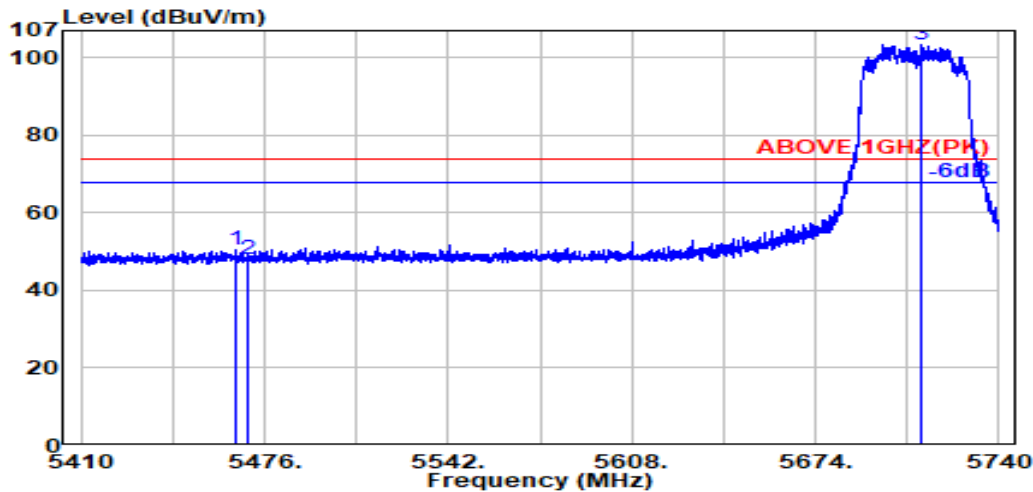

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.17	8.73	34.18	41.71	50.43	74.00	23.57	Peak
5470.000	34.16	8.74	34.18	39.38	48.10	74.00	25.90	Peak
@ 5711.800	33.80	8.87	34.27	95.01	103.41	---	---	Peak

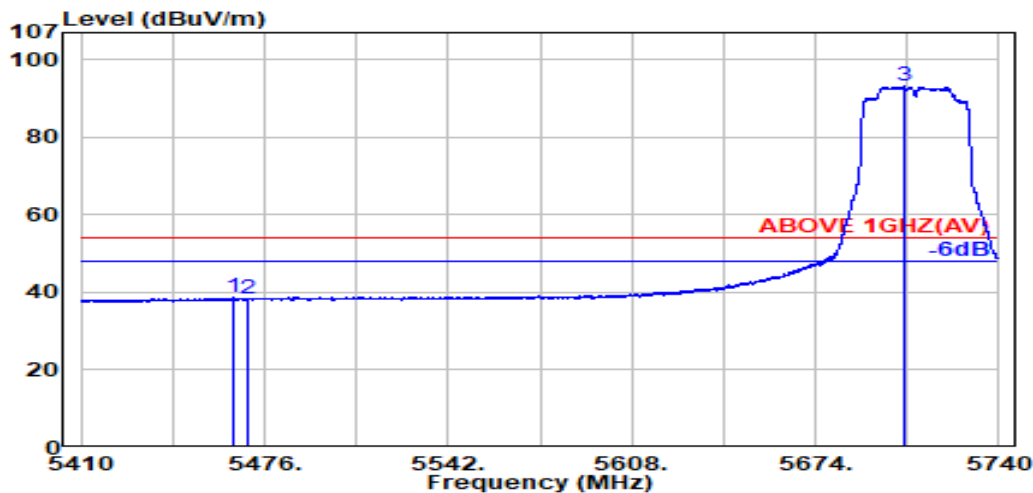

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.17	8.73	34.18	30.08	38.80	54.00	15.20	Average
5470.000	34.16	8.74	34.18	29.56	38.27	54.00	15.73	Average
@ 5706.300	33.80	8.87	34.27	84.72	93.13	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

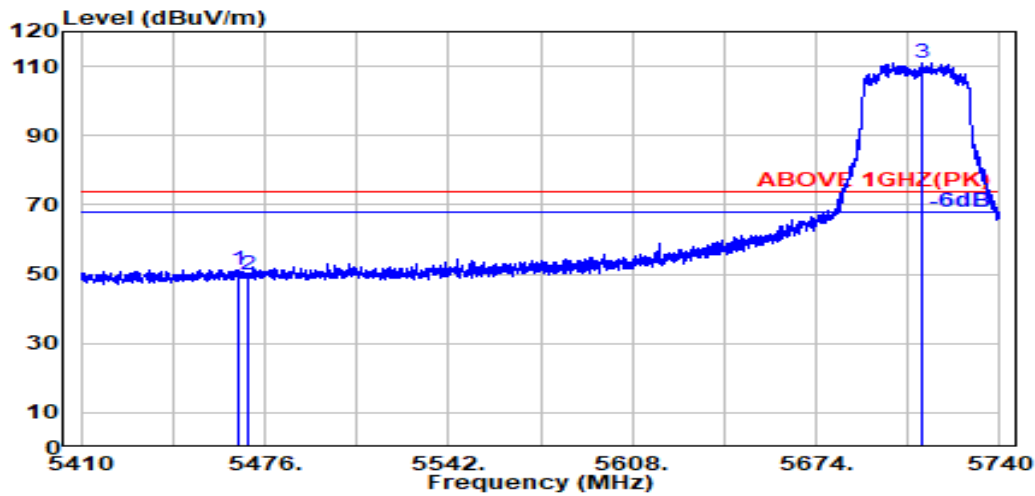

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	42.59	51.31	74.00	22.69	Peak
5470.000	34.16	8.74	34.18	41.26	49.97	74.00	24.03	Peak
@ 5712.100	33.80	8.87	34.27	102.50	110.90	---	---	Peak

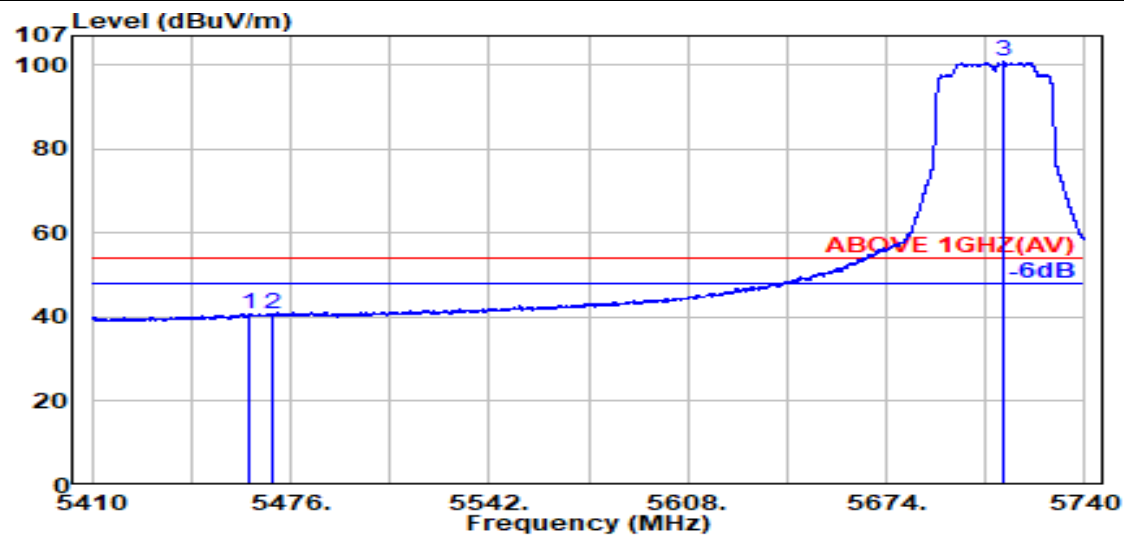

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.18	8.73	34.18	32.07	40.79	54.00	13.21	Average
5470.000	34.16	8.74	34.18	32.00	40.71	54.00	13.29	Average
@ 5712.800	33.80	8.87	34.27	92.34	100.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

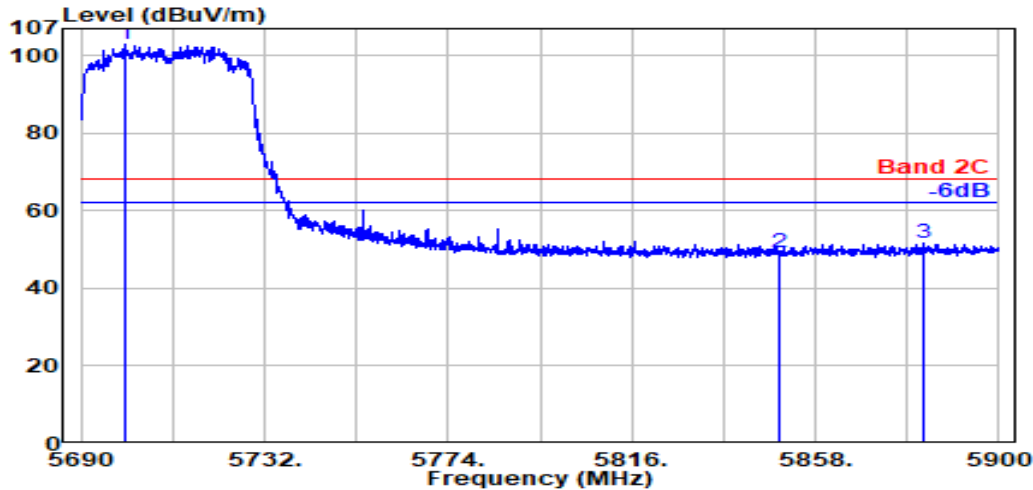

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.300	33.80	8.87	34.26	94.43	102.83	---	---	Peak
5850.000	34.10	8.95	34.33	40.45	49.16	68.20	19.04	Peak
5882.700	34.10	8.97	34.35	42.77	51.49	68.20	16.71	Peak

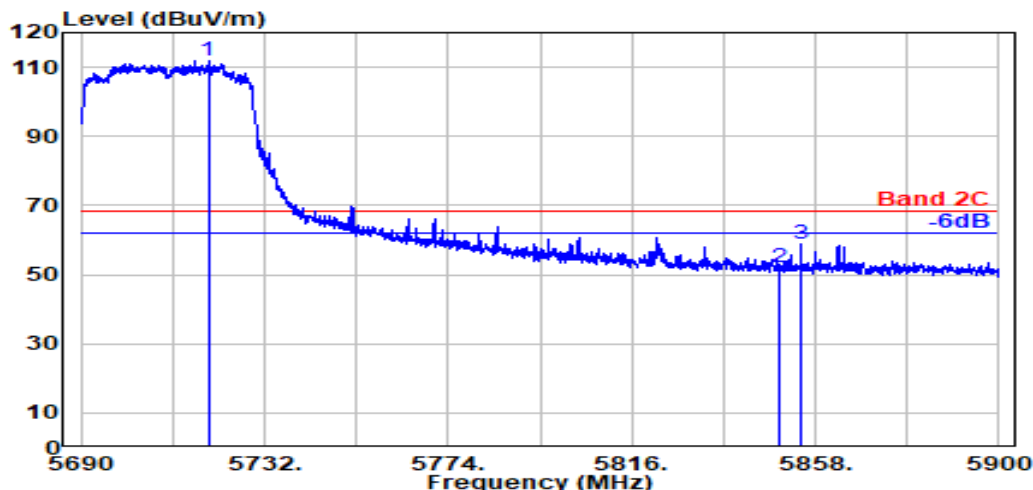

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.100	33.80	8.88	34.27	103.52	111.93	---	---	Peak
5850.000	34.10	8.95	34.33	43.19	51.91	68.20	16.29	Peak
5854.700	34.10	8.95	34.34	50.25	58.96	68.20	9.24	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152

Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

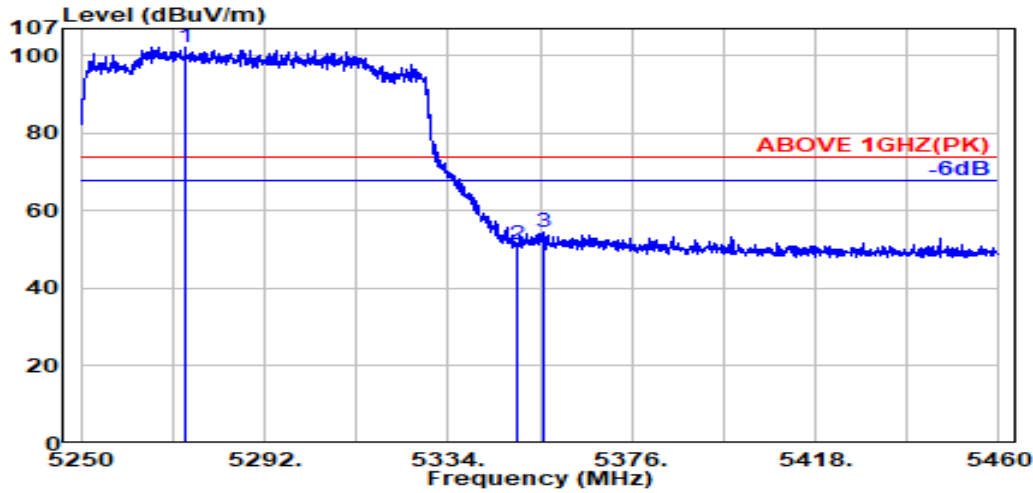

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5273.700	33.94	8.62	34.24	93.91	102.23	---	---	Peak
5350.000	33.90	8.67	34.22	42.76	51.11	74.00	22.89	Peak
5355.600	33.92	8.67	34.21	46.02	54.40	74.00	19.60	Peak

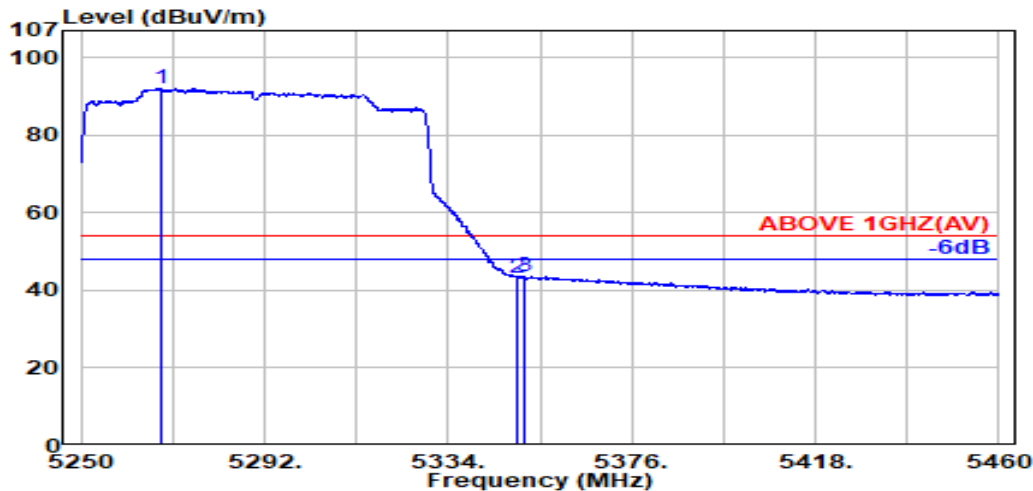

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.600	33.91	8.62	34.24	83.91	92.20	---	---	Average
5350.000	33.90	8.67	34.22	35.02	43.37	54.00	10.63	Average
5351.300	33.91	8.67	34.22	35.22	43.58	54.00	10.42	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

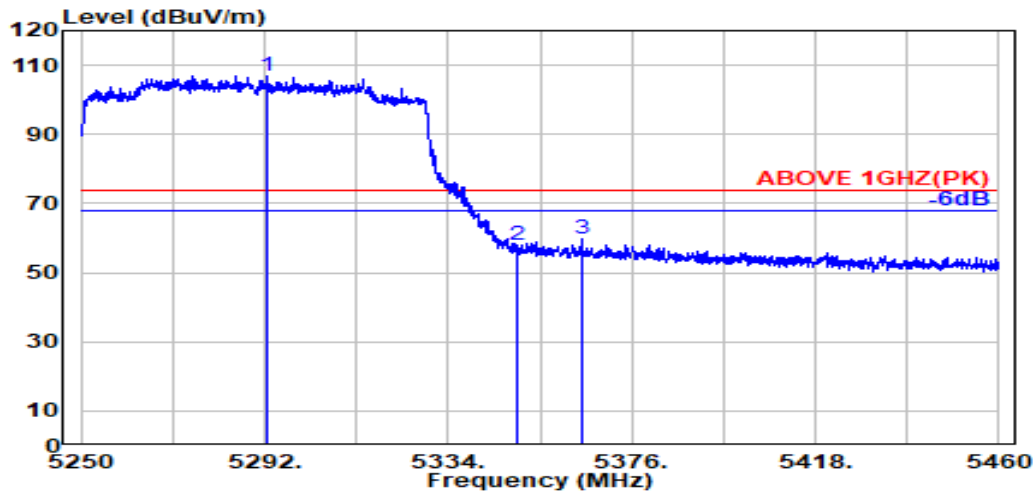

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.600	34.06	8.63	34.23	98.40	106.85	---	---	Peak
5350.000	33.90	8.67	34.22	49.50	57.85	74.00	16.15	Peak
5364.500	33.96	8.67	34.21	51.42	59.84	74.00	14.16	Peak

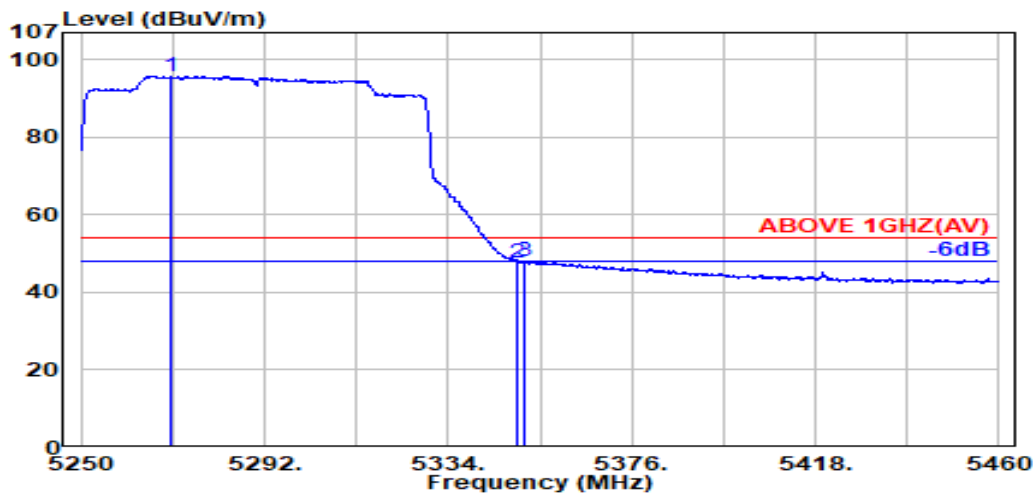

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.400	33.92	8.62	34.24	87.50	95.80	---	---	Average
5350.000	33.90	8.67	34.22	39.44	47.79	54.00	6.21	Average
5351.600	33.91	8.67	34.22	39.74	48.10	54.00	5.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

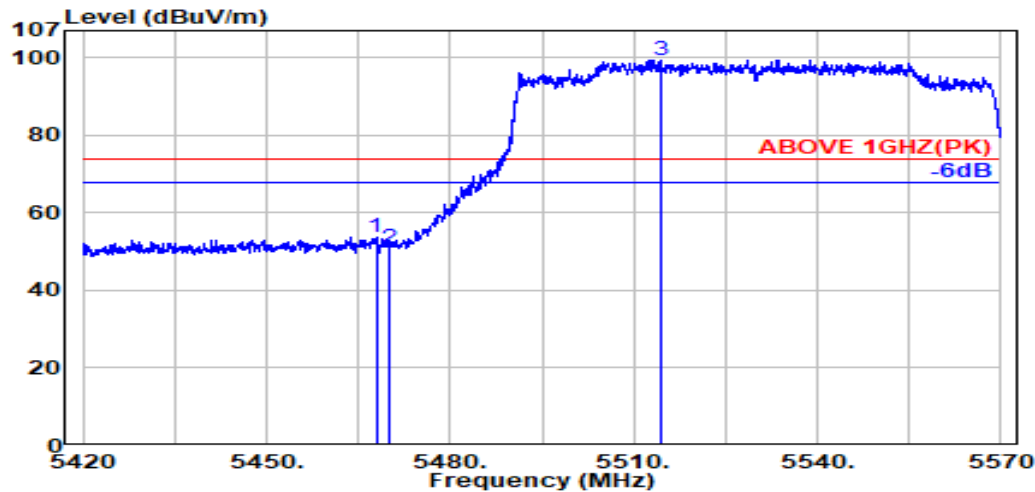

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.16	8.73	34.18	44.86	53.58	74.00	20.42	Peak
5470.000	34.16	8.74	34.18	42.16	50.87	74.00	23.13	Peak
@ 5514.500	34.10	8.76	34.18	90.81	99.50	---	---	Peak

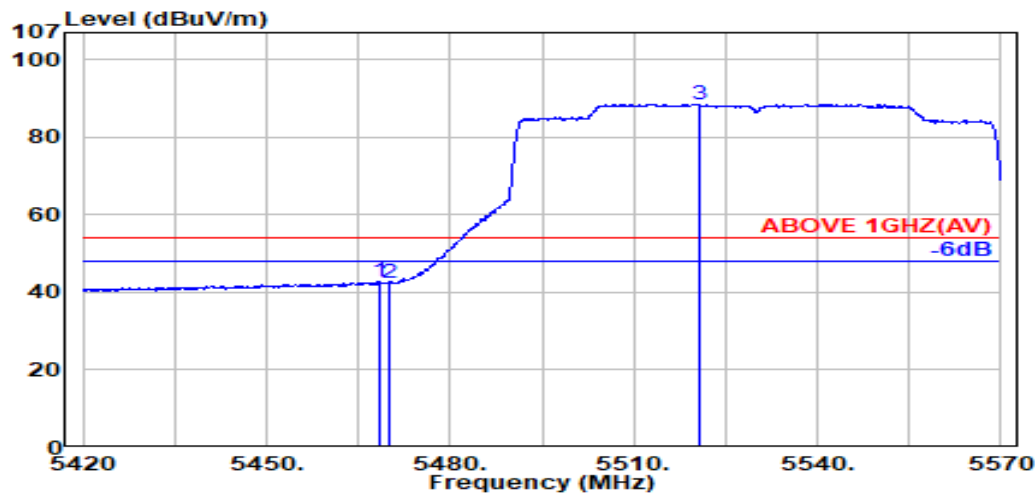

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.16	8.73	34.18	33.92	42.64	54.00	11.36	Average
5470.000	34.16	8.74	34.18	33.77	42.49	54.00	11.51	Average
@ 5520.600	34.10	8.77	34.18	79.91	88.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

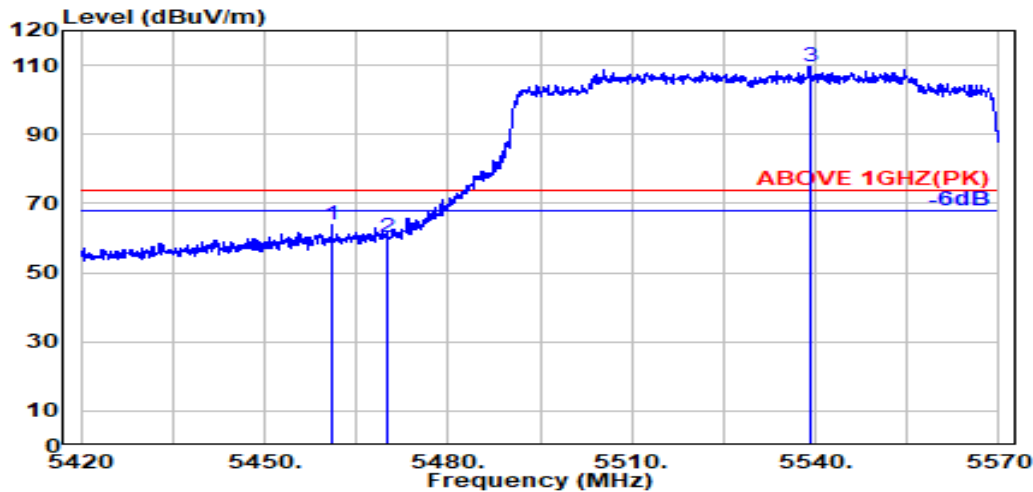

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.100	34.18	8.73	34.18	54.90	63.63	74.00	10.37	Peak
5470.000	34.16	8.74	34.18	51.39	60.10	74.00	13.90	Peak
@ 5539.100	34.10	8.78	34.19	101.09	109.78	---	---	Peak

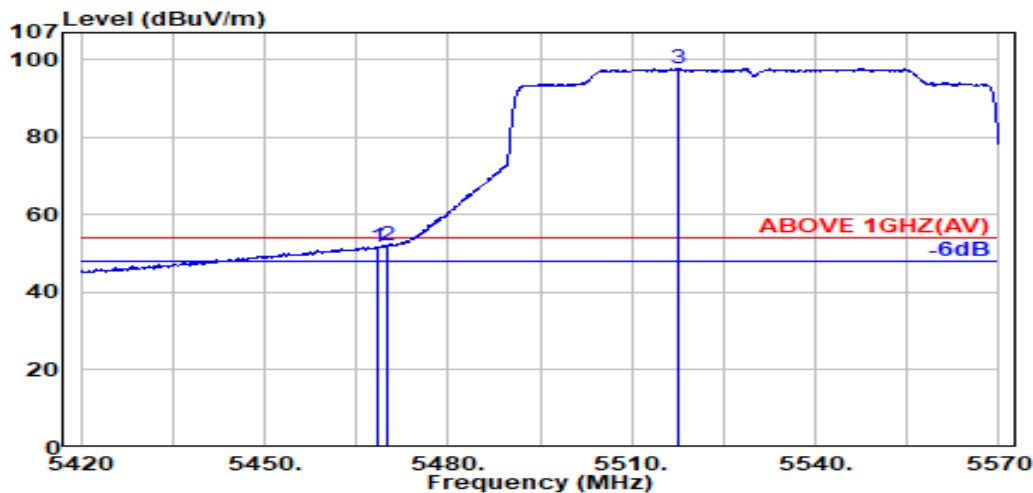

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	43.09	51.80	54.00	2.20	Average
5470.000	34.16	8.74	34.18	43.25	51.97	54.00	2.03	Average
@ 5517.600	34.10	8.76	34.18	89.14	97.83	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

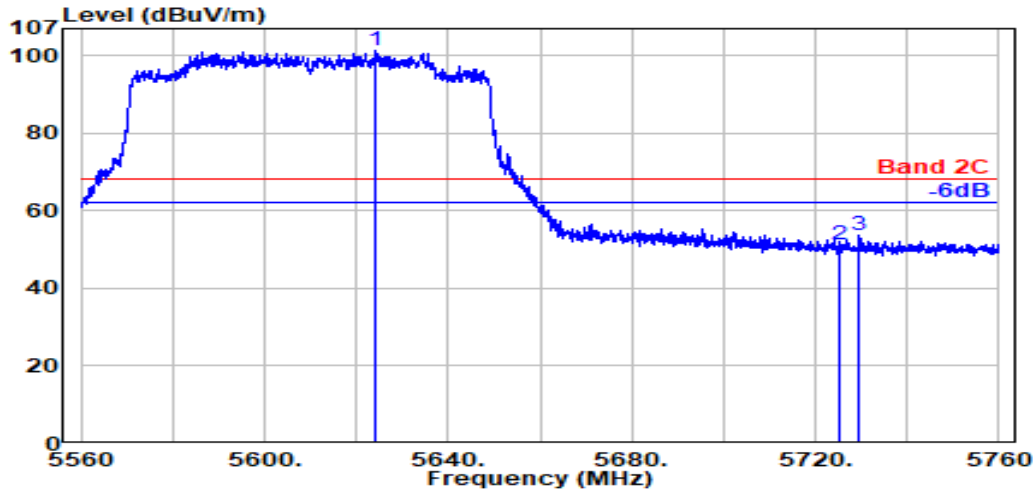

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5624.300	34.00	8.82	34.23	92.91	101.50	---	---	Peak
5725.000	33.80	8.88	34.28	42.77	51.18	68.20	17.02	Peak
5729.600	33.80	8.88	34.28	45.17	53.58	68.20	14.62	Peak

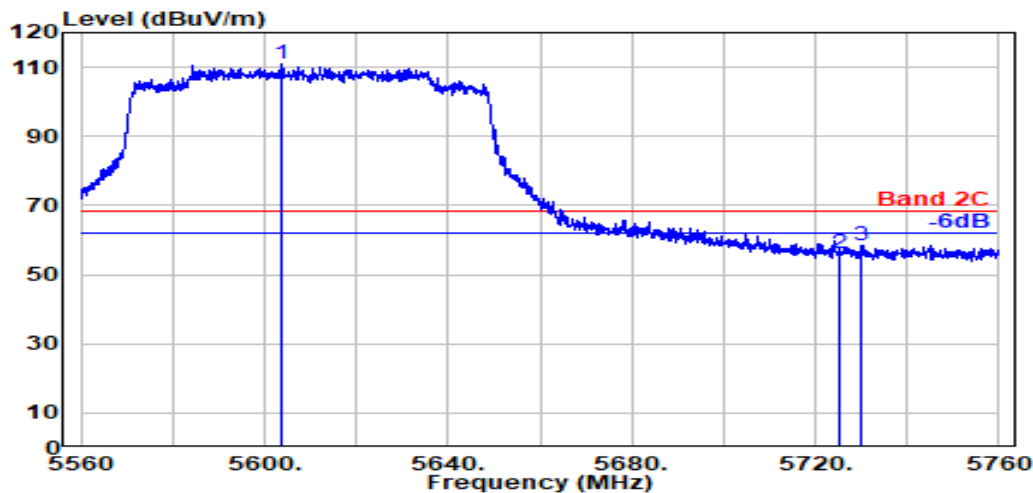

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5603.900	34.00	8.81	34.22	102.29	110.88	---	---	Peak
5725.000	33.80	8.88	34.28	47.59	56.00	68.20	12.20	Peak
5730.200	33.80	8.88	34.28	50.05	58.45	68.20	9.75	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

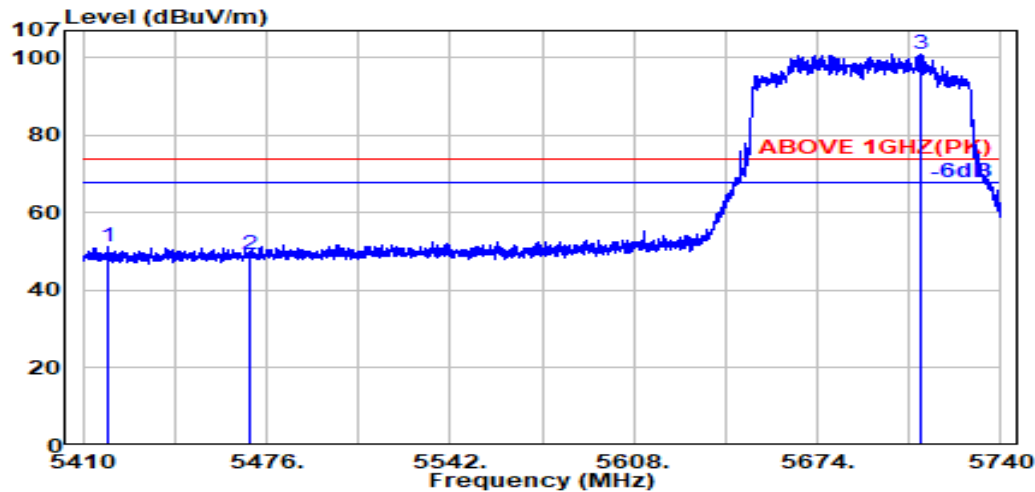

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.700	34.14	8.71	34.20	42.44	51.09	74.00	22.91	Peak
5470.000	34.16	8.74	34.18	40.49	49.21	74.00	24.79	Peak
@ 5710.800	33.80	8.87	34.27	92.47	100.87	---	---	Peak

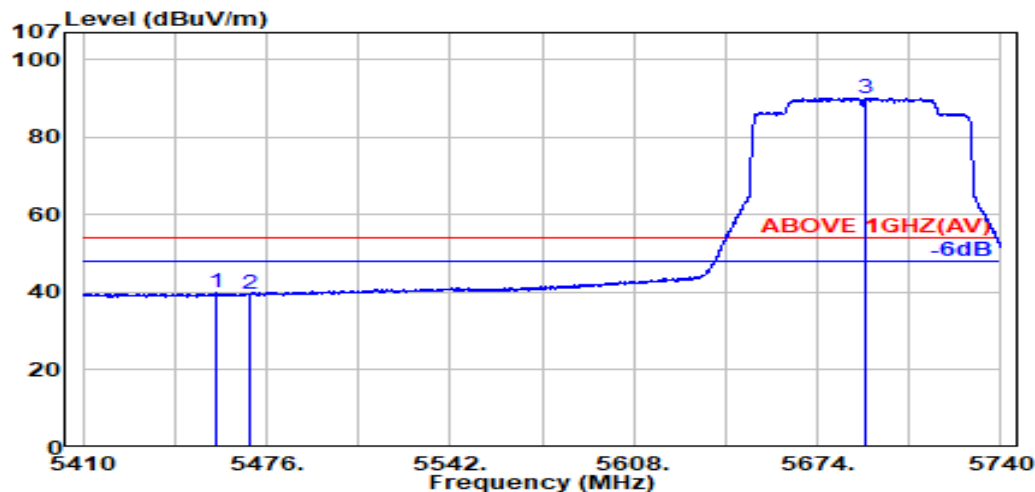

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.18	8.73	34.18	31.05	39.78	54.00	14.22	Average
5470.000	34.16	8.74	34.18	30.71	39.43	54.00	14.57	Average
@ 5691.400	33.83	8.86	34.26	81.75	90.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

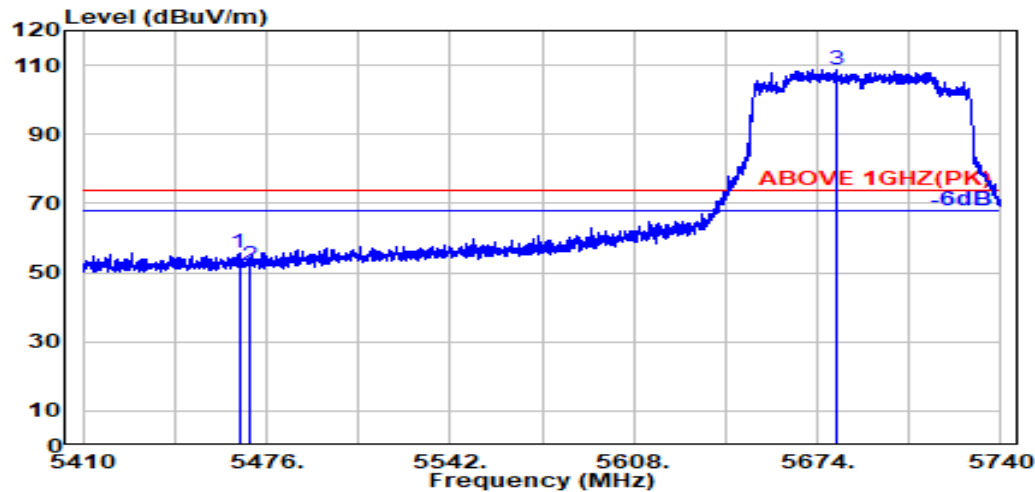

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	8.73	34.18	47.05	55.77	74.00	18.23	Peak
5470.000	34.16	8.74	34.18	43.24	51.96	74.00	22.04	Peak
@ 5680.700	33.88	8.86	34.26	100.29	108.76	---	---	Peak

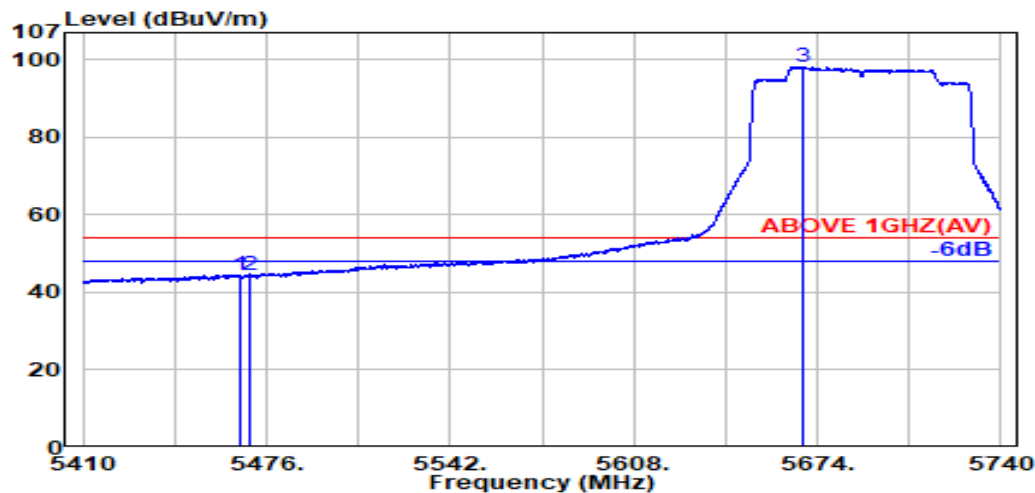

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.17	8.73	34.18	35.76	44.48	54.00	9.52	Average
5470.000	34.16	8.74	34.18	35.85	44.56	54.00	9.44	Average
@ 5669.000	33.92	8.85	34.25	89.68	98.21	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

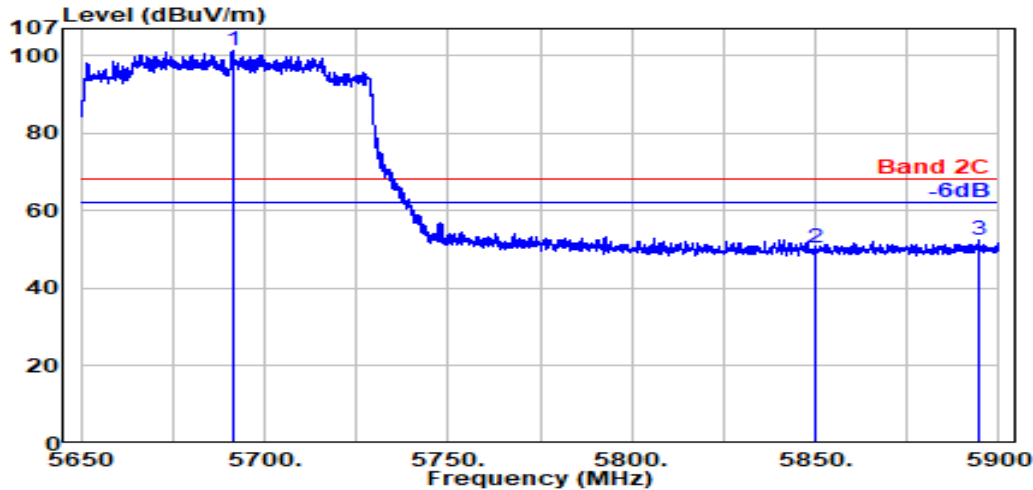

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5691.200	33.84	8.86	34.26	92.87	101.30	---	---	Peak
5850.000	34.10	8.95	34.33	41.63	50.34	68.20	17.86	Peak
5894.300	34.10	8.97	34.35	43.59	52.31	68.20	15.89	Peak

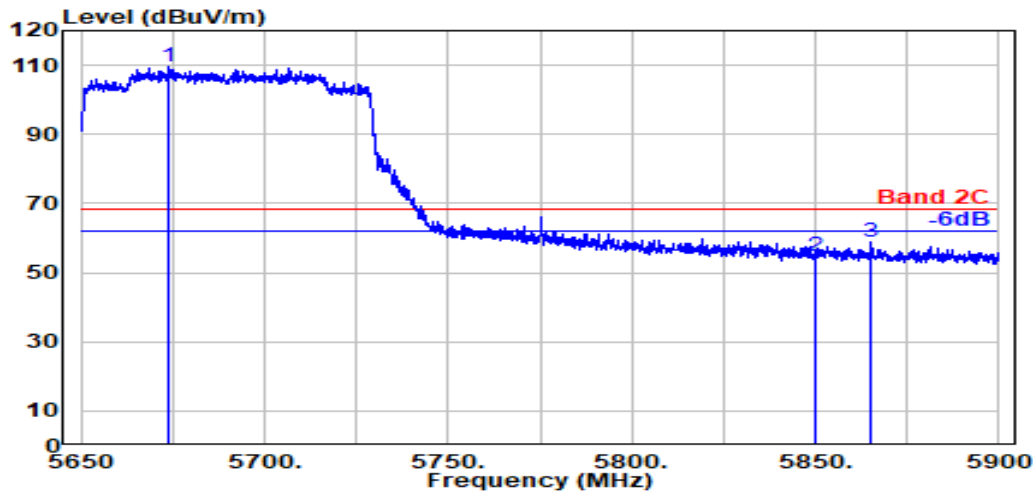

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.000	33.90	8.85	34.25	101.14	109.64	---	---	Peak
5850.000	34.10	8.95	34.33	46.26	54.98	68.20	13.22	Peak
5865.200	34.10	8.96	34.34	50.10	58.82	68.20	9.38	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

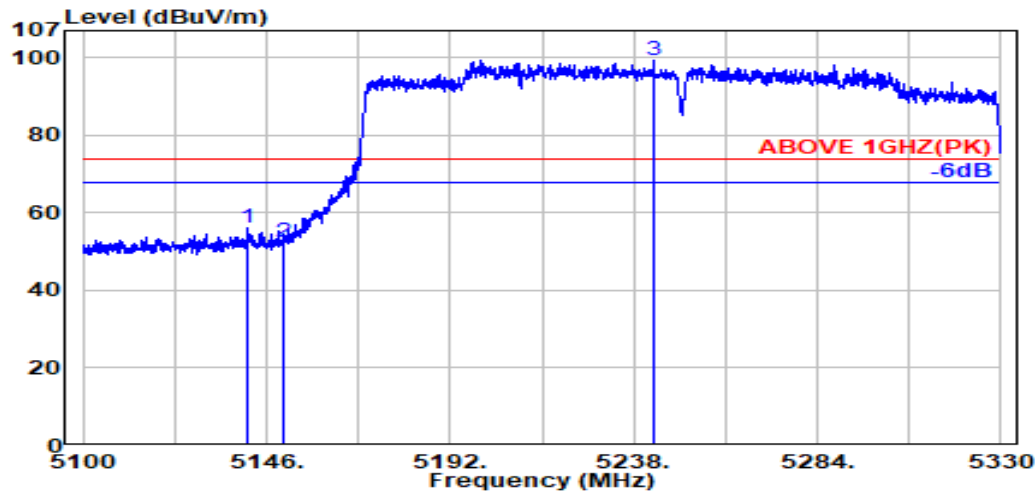

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.100	33.70	8.54	34.28	48.34	56.29	74.00	17.71	Peak
5150.000	33.70	8.54	34.28	44.61	52.58	74.00	21.42	Peak
@ 5242.900	33.79	8.60	34.25	91.15	99.29	---	---	Peak

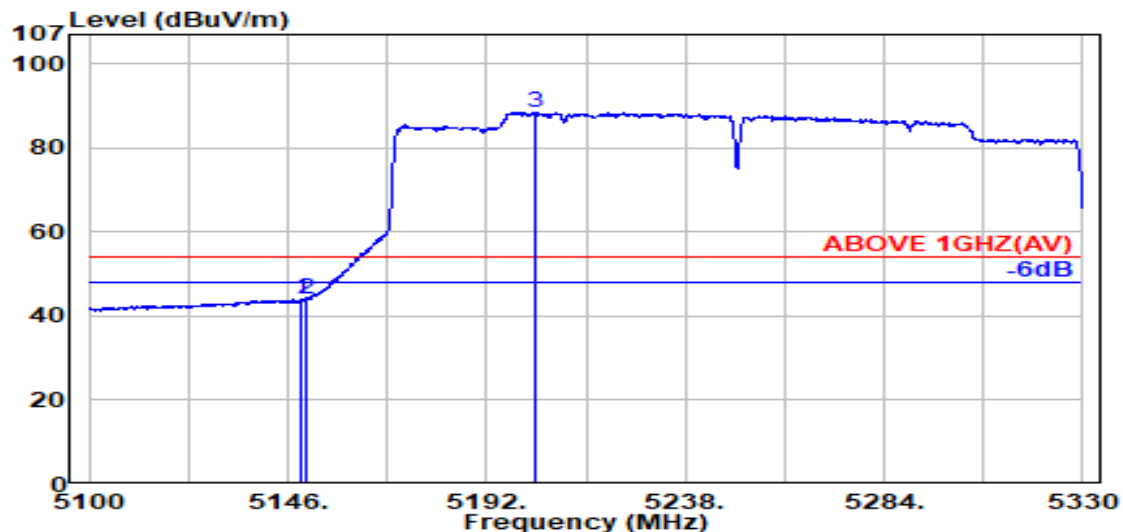

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.70	8.54	34.28	36.15	44.11	54.00	9.89	Average
5150.000	33.70	8.54	34.28	36.02	43.98	54.00	10.02	Average
@ 5203.200	33.71	8.58	34.26	80.53	88.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

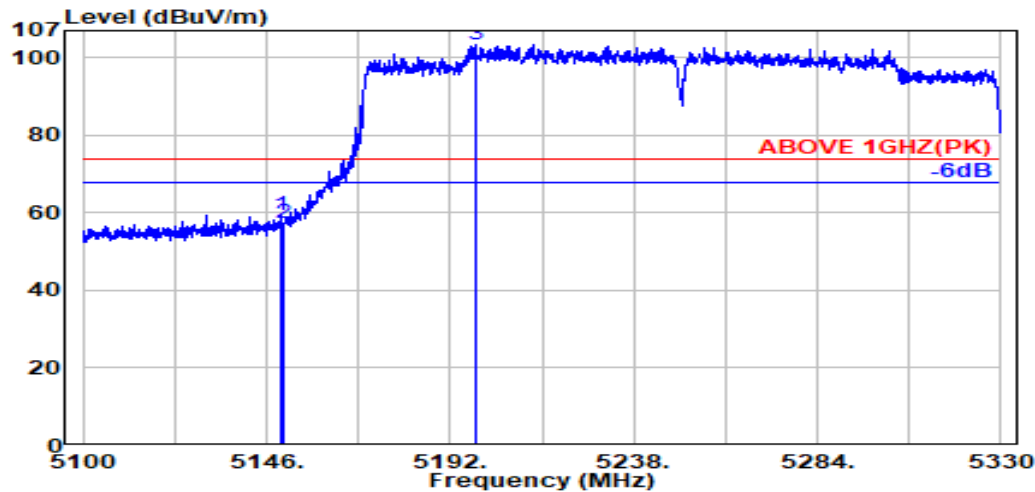

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.28	51.31	59.28	74.00	14.72	Peak
5150.000	33.70	8.54	34.28	49.37	57.33	74.00	16.67	Peak
@ 5198.500	33.70	8.57	34.26	95.31	103.32	---	---	Peak

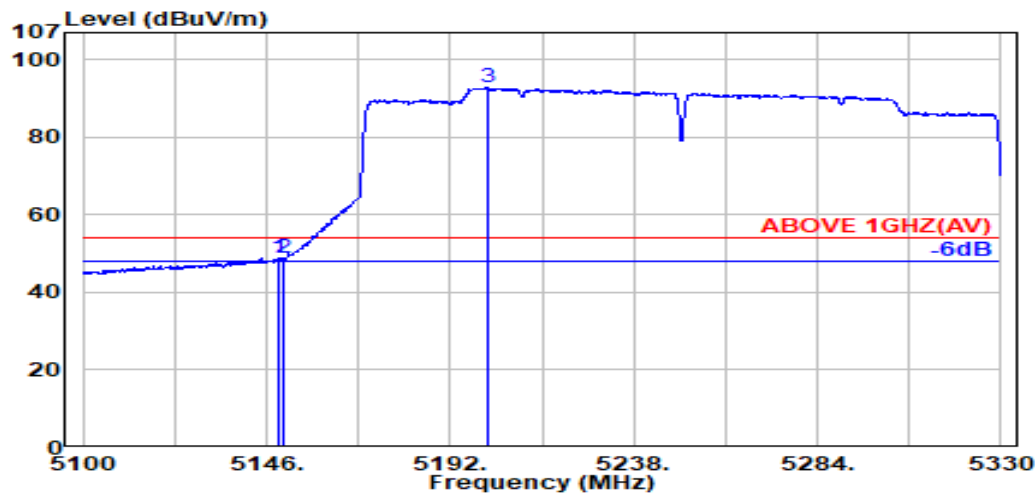

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.70	8.54	34.28	40.93	48.89	54.00	5.11	Average
5150.000	33.70	8.54	34.28	40.81	48.77	54.00	5.23	Average
@ 5201.300	33.70	8.58	34.26	84.85	92.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

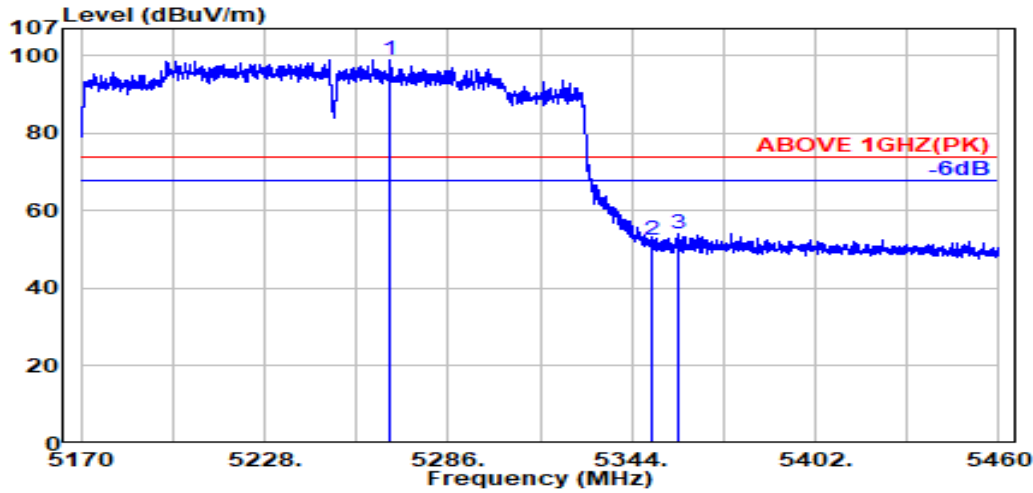

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.500	33.91	8.62	34.24	90.80	99.08	---	---	Peak
5350.000	33.90	8.67	34.22	44.05	52.40	74.00	21.60	Peak
5358.500	33.93	8.67	34.21	45.67	54.06	74.00	19.94	Peak

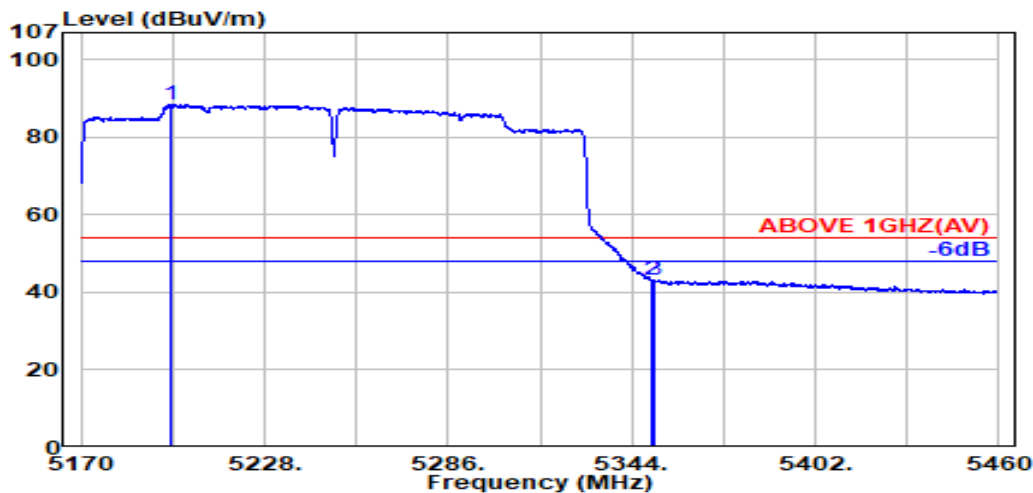

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5198.200	33.70	8.57	34.26	80.36	88.37	---	---	Average
5350.000	33.90	8.67	34.22	34.97	43.32	54.00	10.68	Average
5350.800	33.90	8.67	34.22	34.90	43.25	54.00	10.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

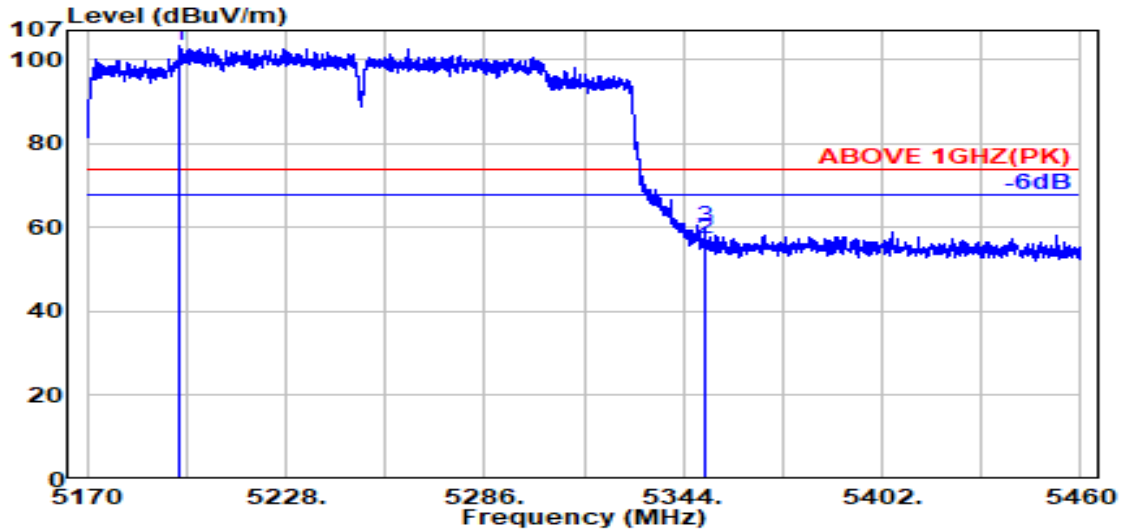

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.200	33.70	8.57	34.27	95.31	103.32	---	---	Peak
5350.000	33.90	8.67	34.22	48.85	57.20	74.00	16.80	Peak
5350.300	33.90	8.67	34.22	51.98	60.34	74.00	13.66	Peak

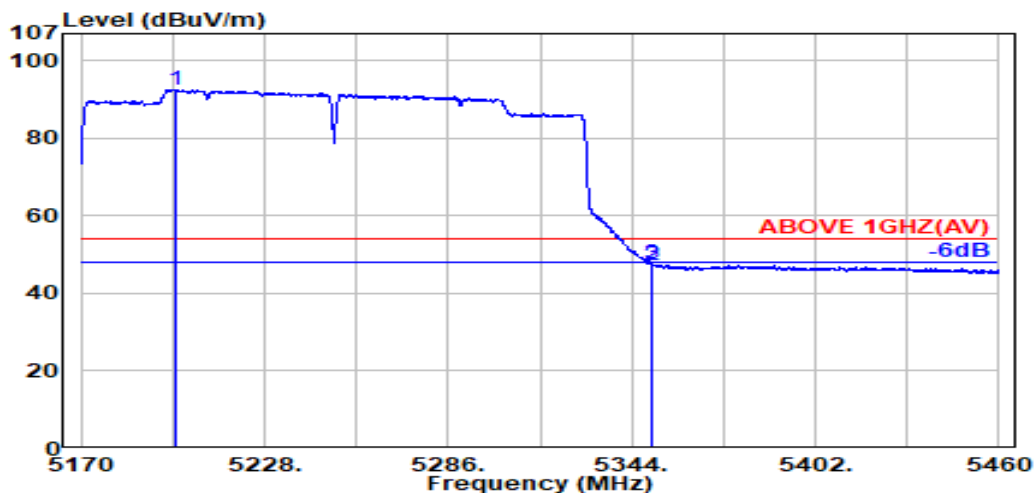

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5199.600	33.70	8.57	34.26	84.47	92.48	---	---	Average
5350.000	33.90	8.67	34.22	39.07	47.42	54.00	6.58	Average
5350.400	33.90	8.67	34.22	39.13	47.48	54.00	6.52	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

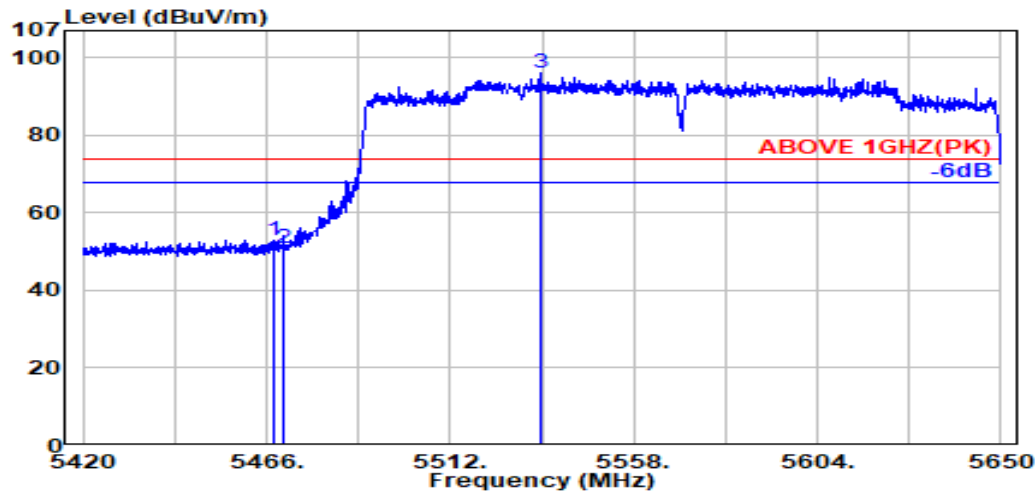

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.16	8.73	34.18	44.12	52.84	74.00	21.16	Peak
5470.000	34.16	8.74	34.18	42.35	51.06	74.00	22.94	Peak
@ 5534.500	34.10	8.77	34.19	87.29	95.98	---	---	Peak

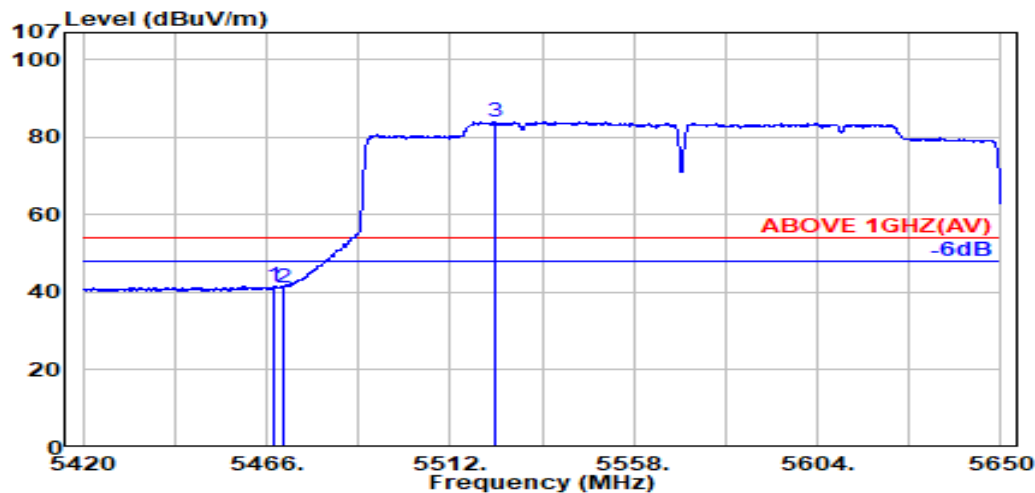

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.16	8.73	34.18	32.88	41.60	54.00	12.40	Average
5470.000	34.16	8.74	34.18	32.66	41.38	54.00	12.62	Average
@ 5523.300	34.10	8.77	34.18	75.27	83.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

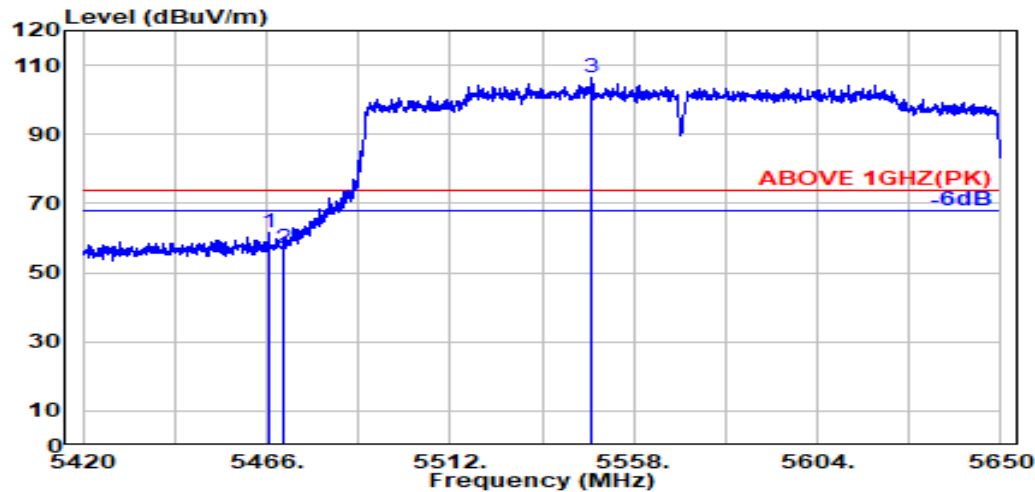

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.17	8.73	34.18	52.71	61.43	74.00	12.57	Peak
5470.000	34.16	8.74	34.18	48.50	57.22	74.00	16.78	Peak
@ 5547.600	34.10	8.78	34.19	97.61	106.30	---	---	Peak

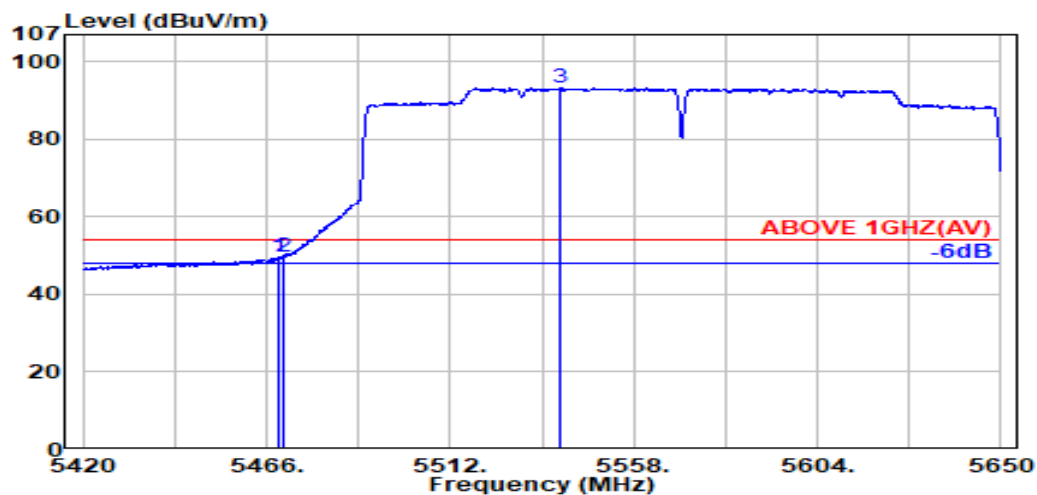

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.16	8.74	34.18	40.84	49.56	54.00	4.44	Average
5470.000	34.16	8.74	34.18	40.79	49.50	54.00	4.50	Average
@ 5539.800	34.10	8.78	34.19	84.72	93.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

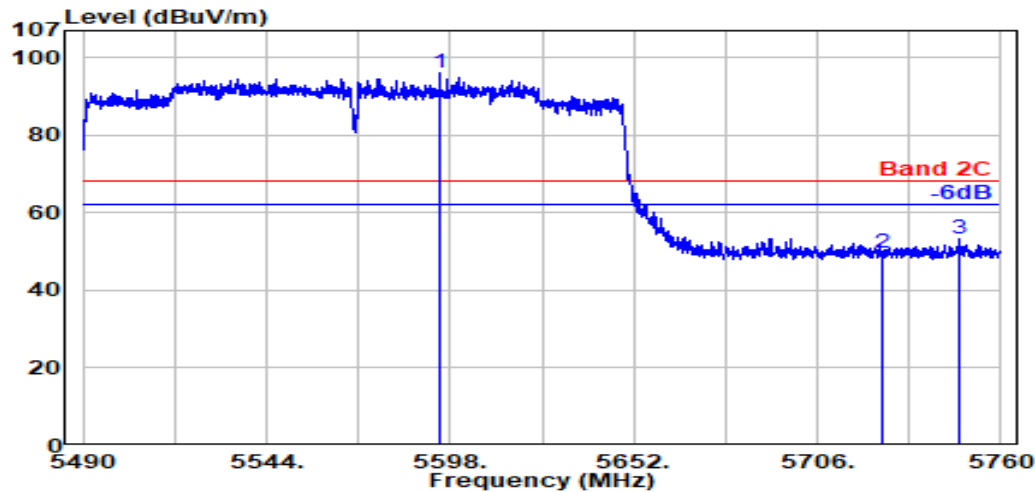

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5594.700	34.01	8.81	34.22	87.31	95.91	---	---	Peak
5725.000	33.80	8.88	34.28	41.35	49.75	68.20	18.45	Peak
5747.700	33.80	8.89	34.29	44.79	53.20	68.20	15.00	Peak

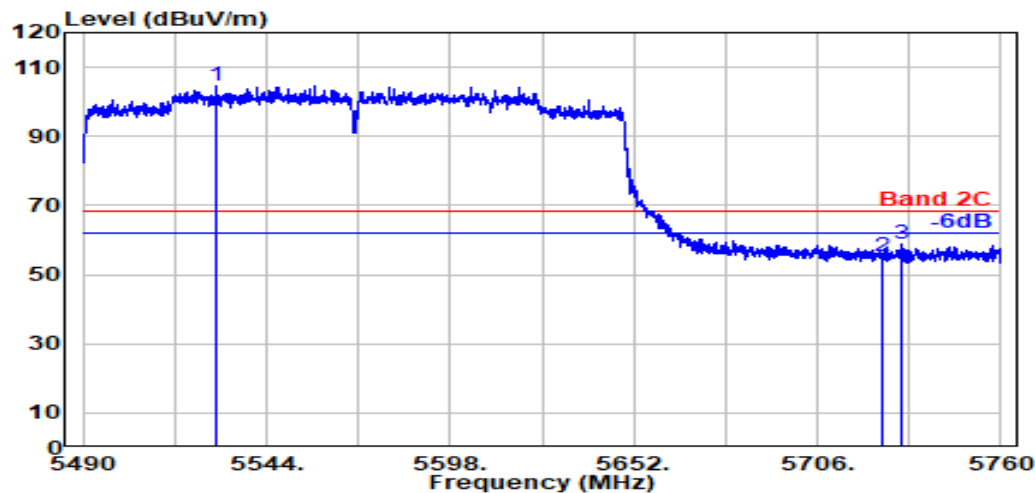

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5529.200	34.10	8.77	34.18	95.87	104.55	---	---	Peak
5725.000	33.80	8.88	34.28	46.95	55.35	68.20	12.85	Peak
5730.500	33.80	8.88	34.28	50.32	58.72	68.20	9.48	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410152


Report Number: EM-F240630

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

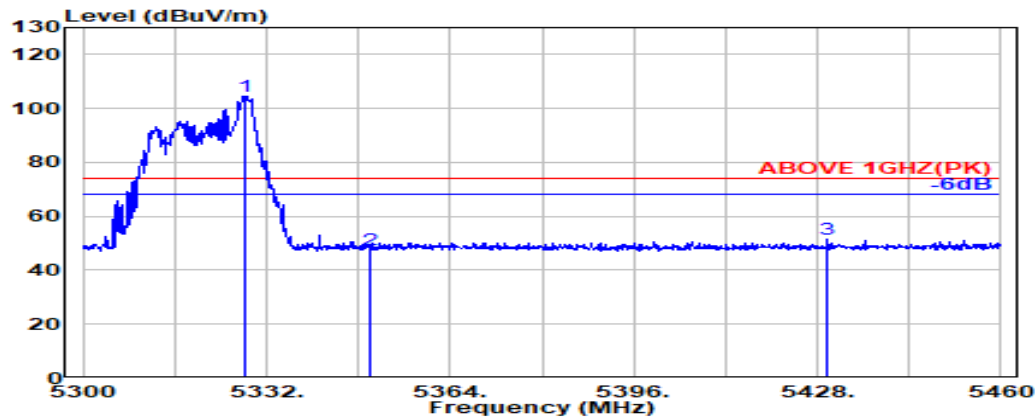

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	33.99	8.65	34.22	96.18	104.59	---	---	Peak
5350.000	33.90	8.67	34.22	39.08	47.43	74.00	26.57	Peak
5429.600	34.16	8.71	34.19	42.62	51.30	74.00	22.70	Peak

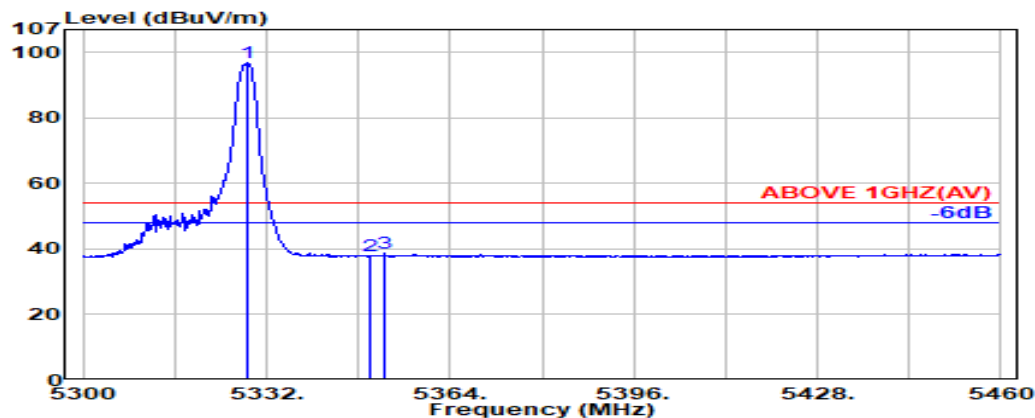

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	33.98	8.65	34.22	88.59	97.00	---	---	Average
5350.000	33.90	8.67	34.22	29.57	37.92	54.00	16.08	Average
5352.600	33.91	8.67	34.22	30.23	38.59	54.00	15.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

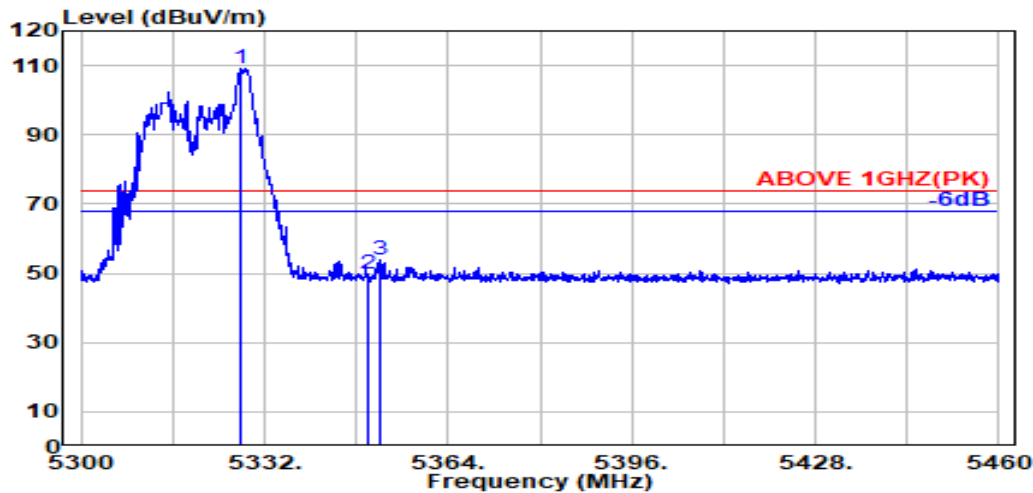

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.99	8.65	34.22	100.87	109.29	---	---	Peak
5350.000	33.90	8.67	34.22	41.42	49.77	74.00	24.23	Peak
5352.000	33.91	8.67	34.22	45.71	54.07	74.00	19.93	Peak

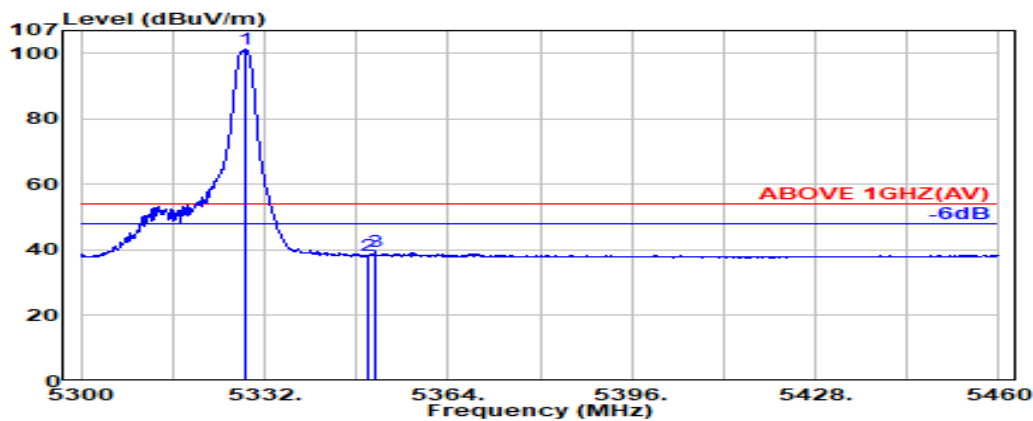

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.99	8.65	34.22	92.76	101.17	---	---	Average
5350.000	33.90	8.67	34.22	29.89	38.24	54.00	15.76	Average
5351.300	33.91	8.67	34.22	31.06	39.41	54.00	14.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

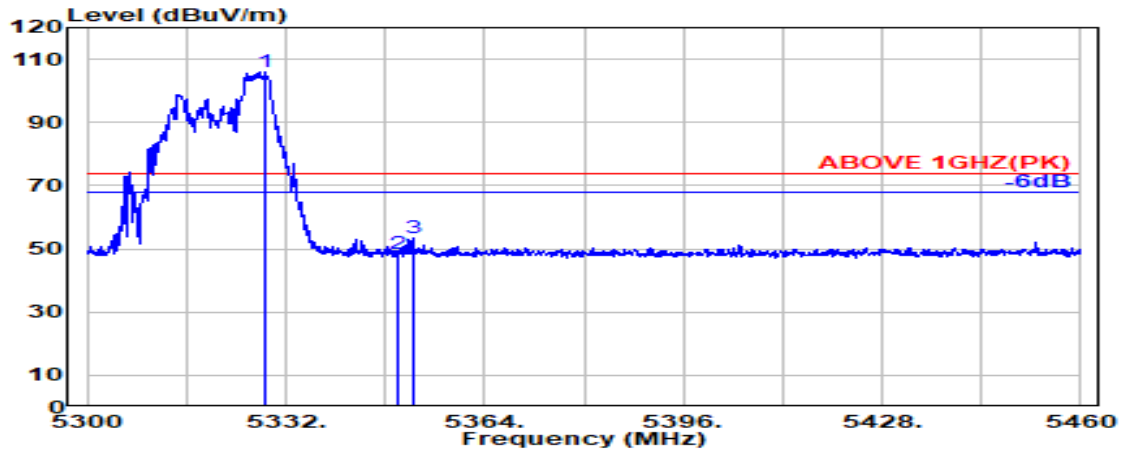

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.99	8.65	34.22	97.71	106.12	---	---	Peak
5350.000	33.90	8.67	34.22	39.97	48.32	74.00	25.68	Peak
5352.400	33.91	8.67	34.22	45.05	53.41	74.00	20.59	Peak

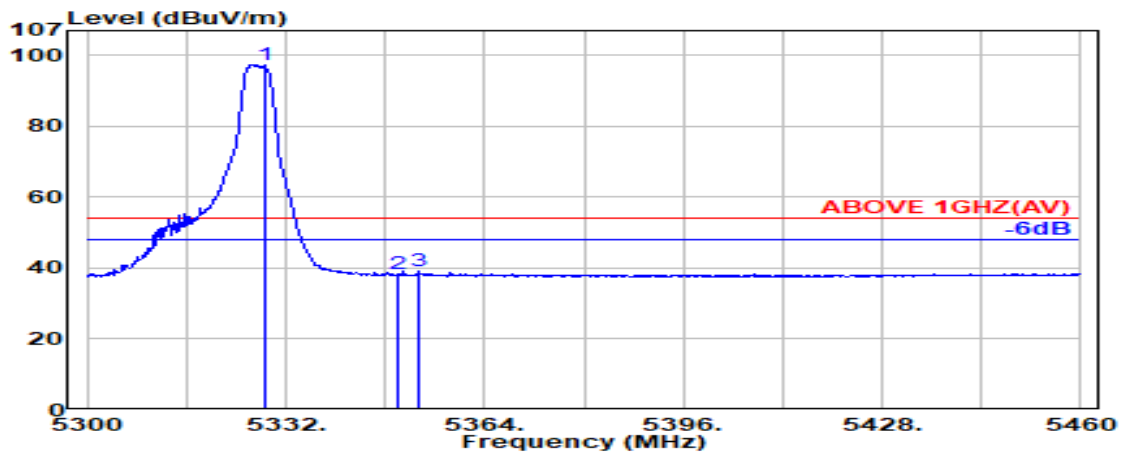

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.99	8.65	34.22	89.01	97.42	---	---	Average
5350.000	33.90	8.67	34.22	29.98	38.33	54.00	15.67	Average
5353.500	33.91	8.67	34.22	30.75	39.12	54.00	14.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

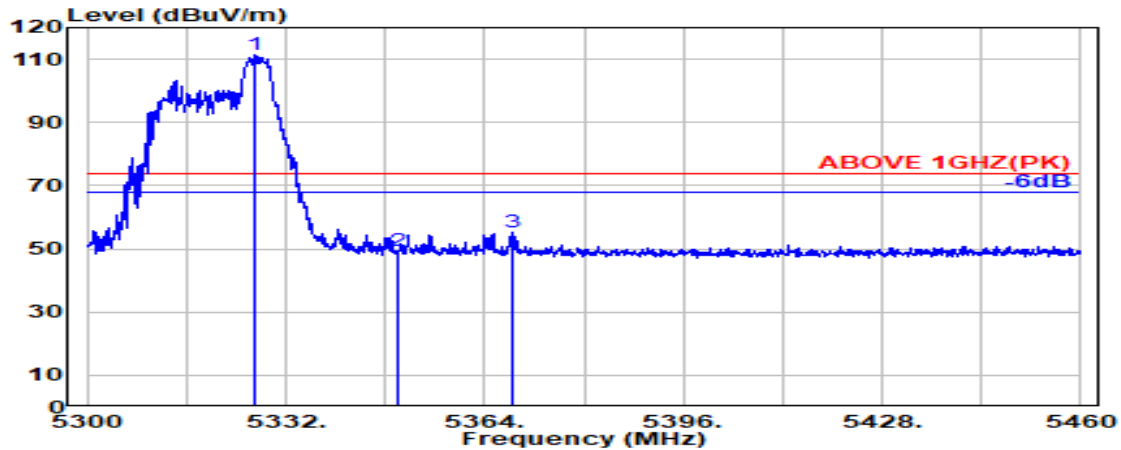

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5326.800	33.99	8.65	34.22	103.11	111.53	---	---	Peak
5350.000	33.90	8.67	34.22	41.14	49.49	74.00	24.51	Peak
5368.300	33.97	8.68	34.21	46.83	55.27	74.00	18.73	Peak

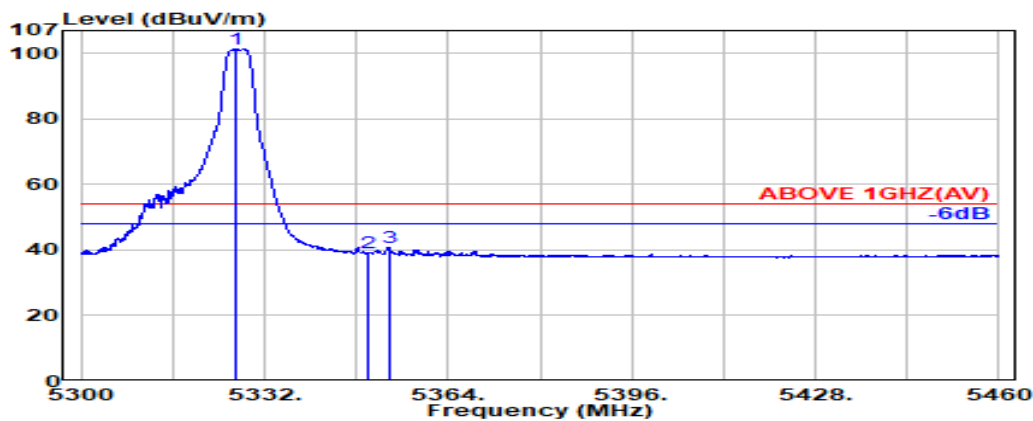

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5326.900	33.99	8.65	34.22	92.99	101.41	---	---	Average
5350.000	33.90	8.67	34.22	30.82	39.17	54.00	14.83	Average
5353.700	33.91	8.67	34.22	32.53	40.89	54.00	13.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

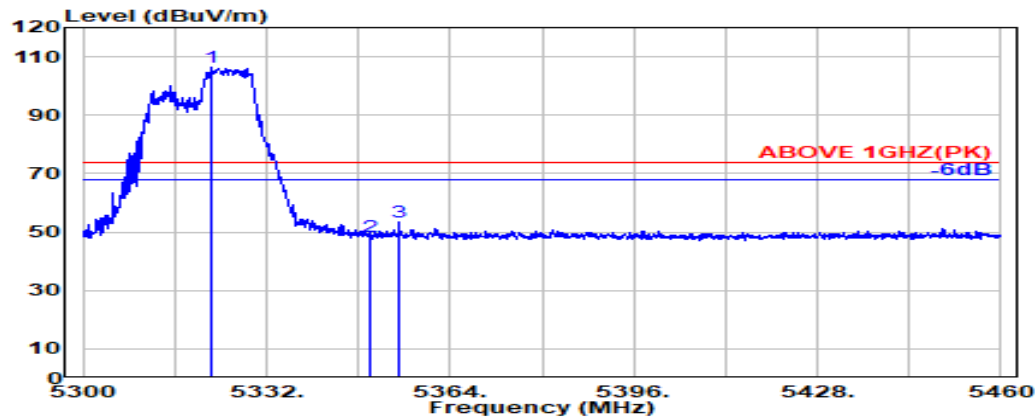

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.300	34.01	8.65	34.23	98.07	106.50	---	---	Peak
5350.000	33.90	8.67	34.22	40.00	48.35	74.00	25.65	Peak
5355.000	33.92	8.67	34.21	45.21	53.58	74.00	20.42	Peak

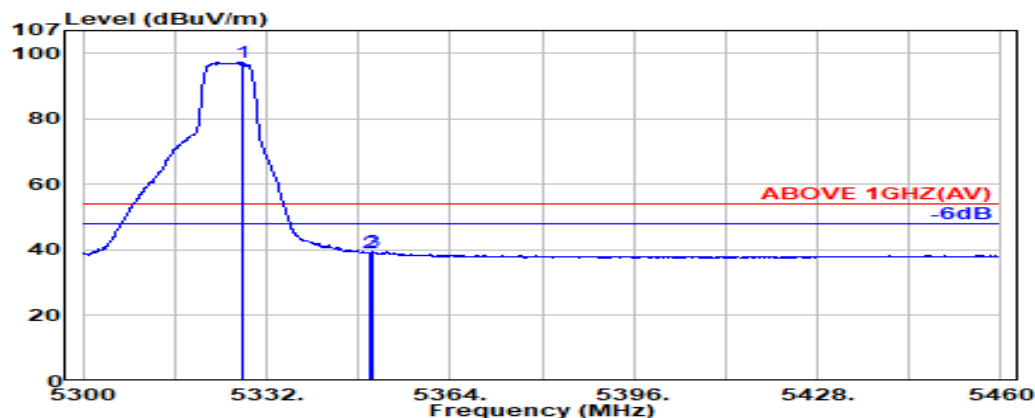

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.99	8.65	34.22	88.87	97.29	---	---	Average
5350.000	33.90	8.67	34.22	30.67	39.02	54.00	14.98	Average
5350.400	33.90	8.67	34.22	31.27	39.62	54.00	14.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

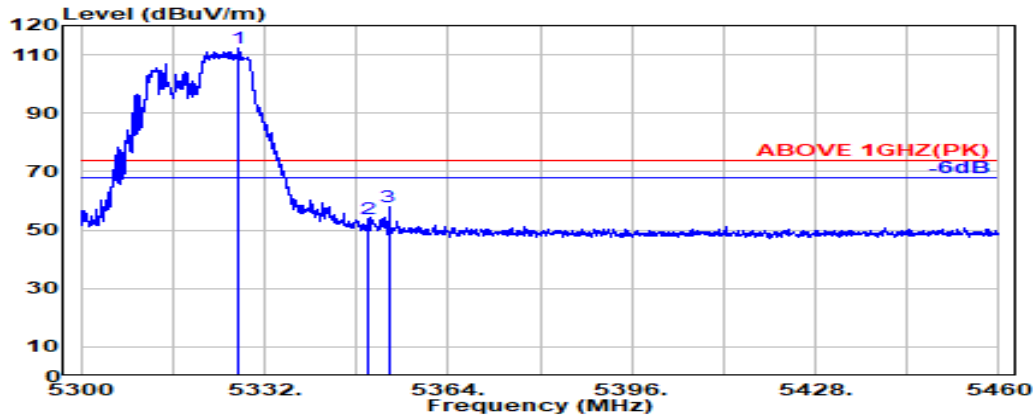

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	33.99	8.65	34.22	103.93	112.35	---	---	Peak
5350.000	33.90	8.67	34.22	45.46	53.81	74.00	20.19	Peak
5353.600	33.91	8.67	34.22	49.39	57.76	74.00	16.24	Peak

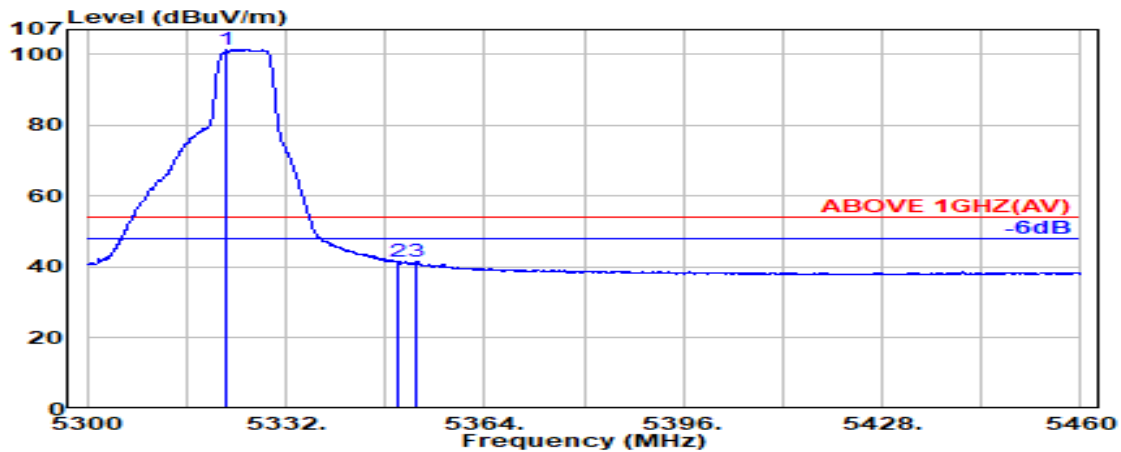

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.500	34.01	8.65	34.23	92.91	101.34	---	---	Average
5350.000	33.90	8.67	34.22	33.25	41.60	54.00	12.40	Average
5352.800	33.91	8.67	34.22	33.39	41.76	54.00	12.24	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

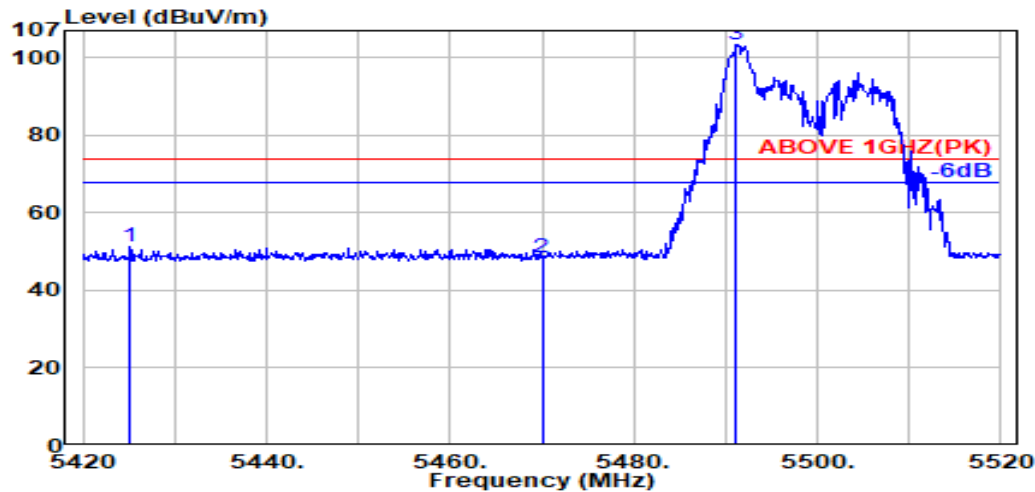

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.200	34.15	8.71	34.19	42.56	51.23	74.00	22.77	Peak
5470.000	34.16	8.74	34.18	39.73	48.45	74.00	25.55	Peak
@ 5491.100	34.12	8.75	34.17	94.62	103.32	---	---	Peak

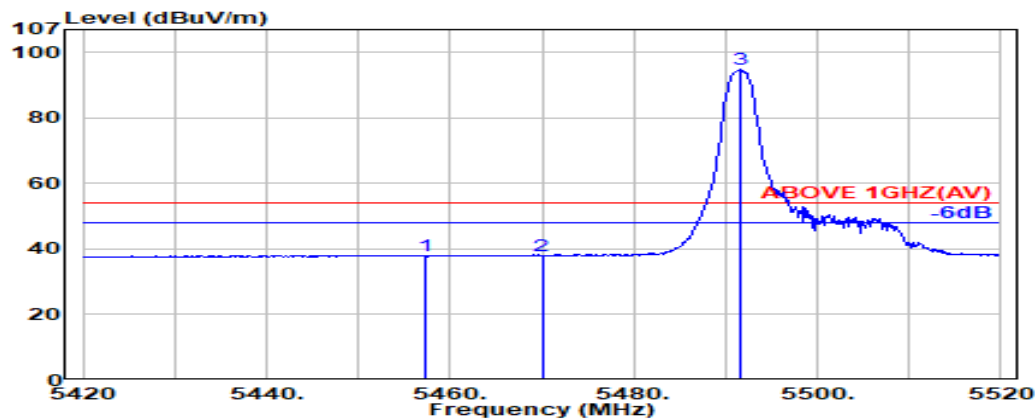

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.200	34.19	8.73	34.18	29.39	38.12	54.00	15.88	Average
5470.000	34.16	8.74	34.18	29.35	38.07	54.00	15.93	Average
@ 5491.600	34.12	8.75	34.17	86.12	94.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

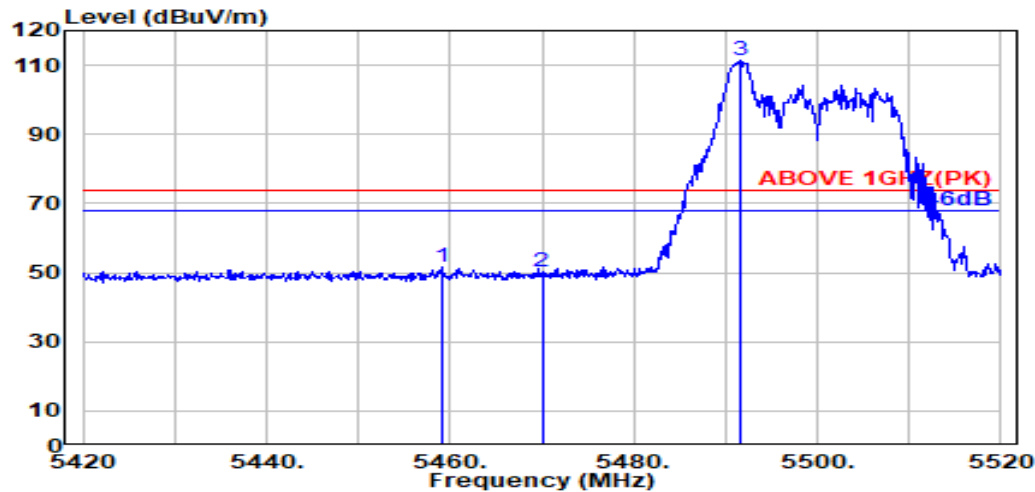

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	34.18	8.73	34.18	42.94	51.67	74.00	22.33	Peak
5470.000	34.16	8.74	34.18	41.43	50.14	74.00	23.86	Peak
@ 5491.600	34.12	8.75	34.17	102.66	111.35	---	---	Peak

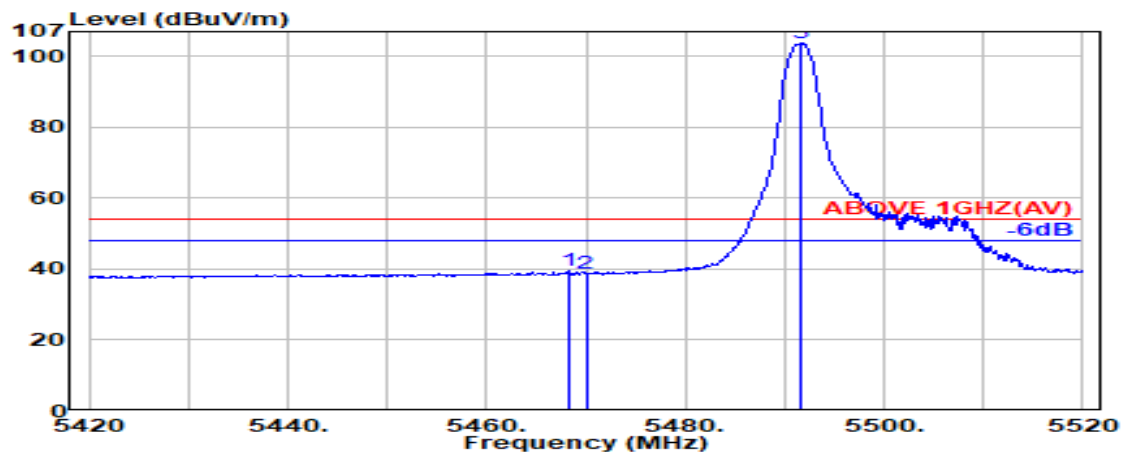

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	30.67	39.39	54.00	14.61	Average
5470.000	34.16	8.74	34.18	29.93	38.65	54.00	15.35	Average
@ 5491.700	34.12	8.75	34.17	95.20	103.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

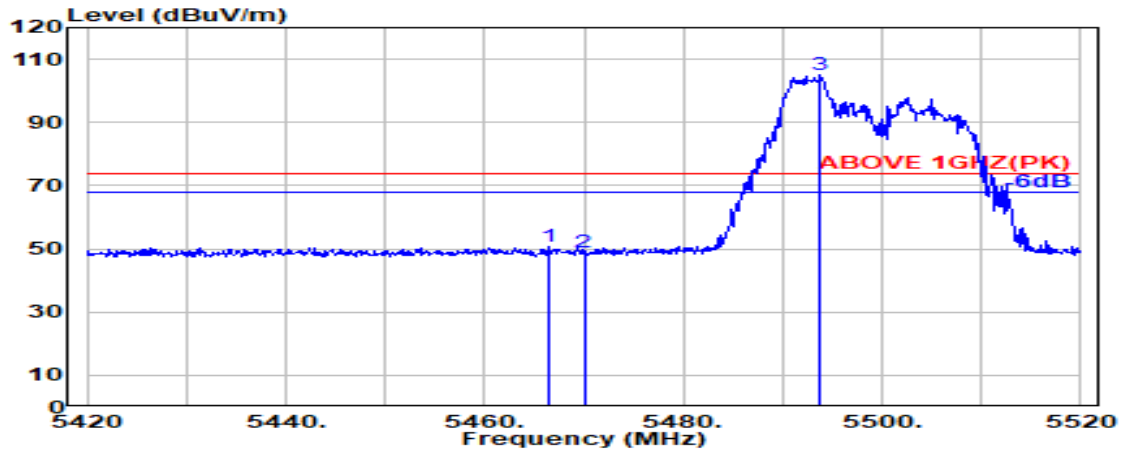

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.17	8.73	34.18	42.10	50.82	74.00	23.18	Peak
5470.000	34.16	8.74	34.18	40.11	48.83	74.00	25.17	Peak
@ 5493.700	34.11	8.75	34.17	96.48	105.17	---	---	Peak

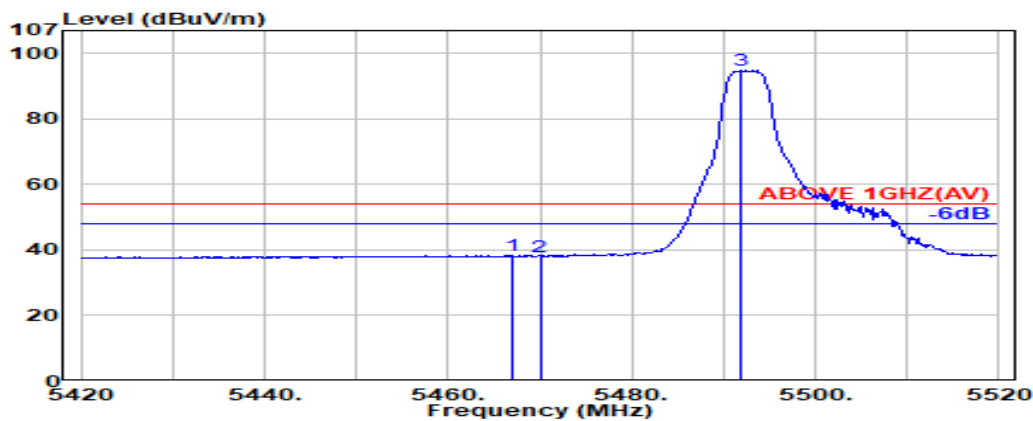

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.17	8.73	34.18	29.75	38.47	54.00	15.53	Average
5470.000	34.16	8.74	34.18	29.39	38.11	54.00	15.89	Average
@ 5491.800	34.12	8.75	34.17	86.28	94.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

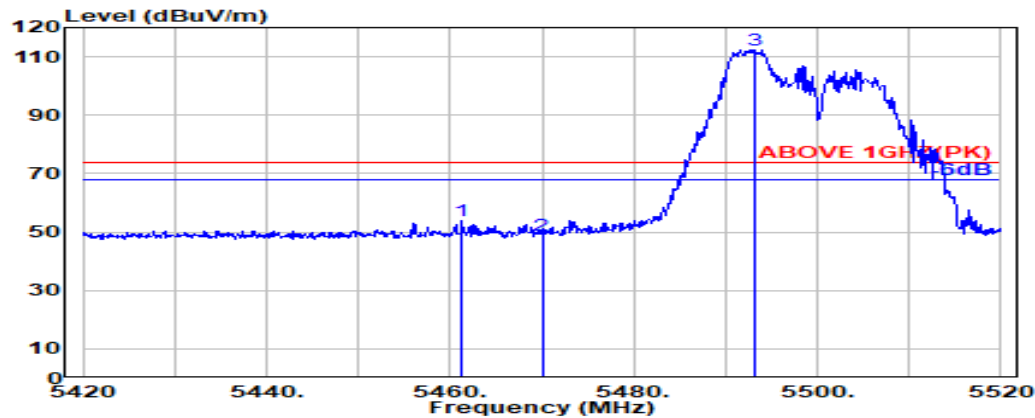

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.18	8.73	34.18	44.94	53.67	74.00	20.33	Peak
5470.000	34.16	8.74	34.18	40.22	48.94	74.00	25.06	Peak
@ 5493.100	34.11	8.75	34.17	103.81	112.50	---	---	Peak

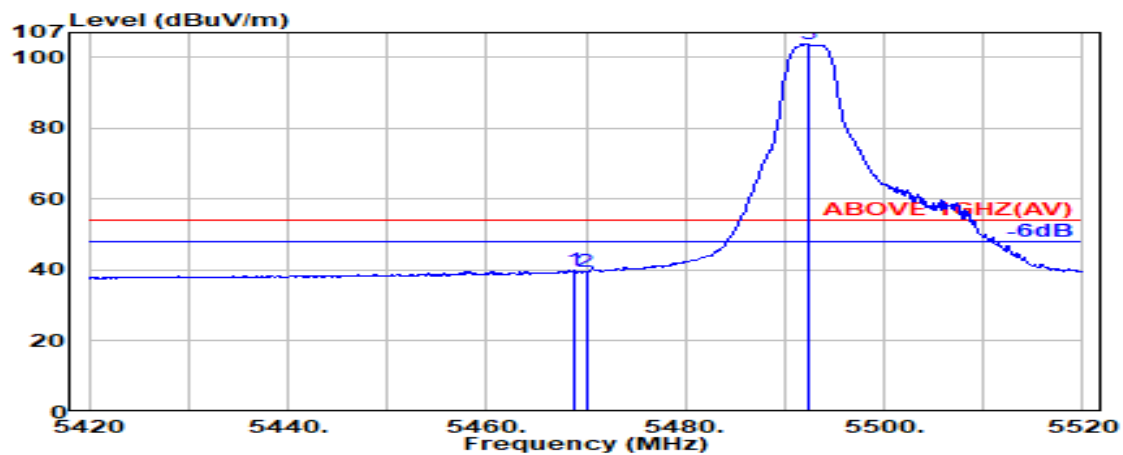

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	31.32	40.04	54.00	13.96	Average
5470.000	34.16	8.74	34.18	30.82	39.53	54.00	14.47	Average
@ 5492.300	34.12	8.75	34.17	95.11	103.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

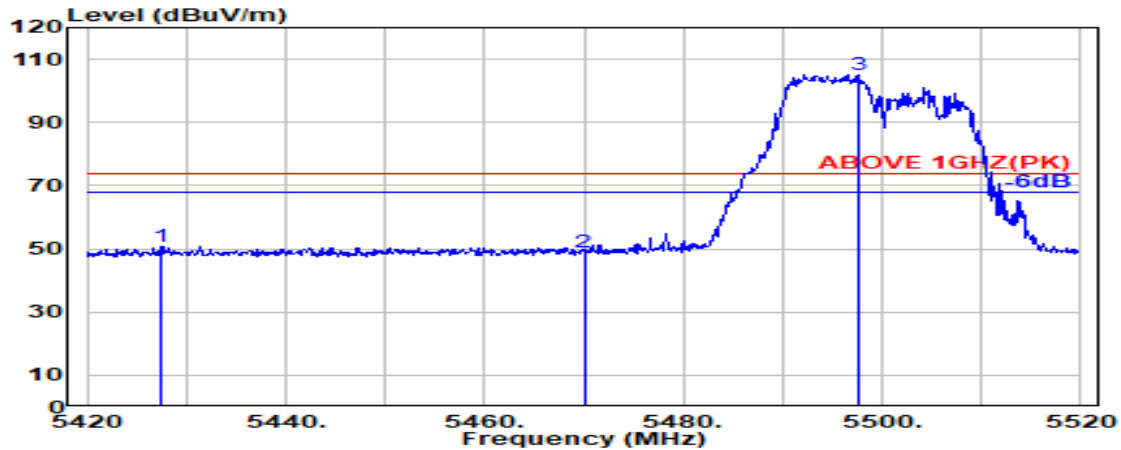

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.400	34.15	8.71	34.19	42.19	50.87	74.00	23.13	Peak
5470.000	34.16	8.74	34.18	40.20	48.92	74.00	25.08	Peak
@ 5497.700	34.10	8.75	34.17	96.41	105.10	---	---	Peak

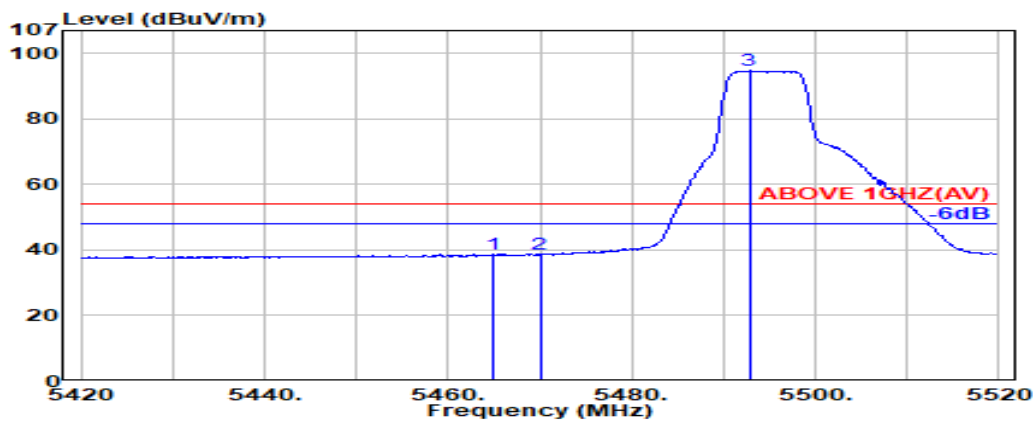

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.17	8.73	34.18	30.11	38.83	54.00	15.17	Average
5470.000	34.16	8.74	34.18	29.86	38.58	54.00	15.42	Average
@ 5492.800	34.11	8.75	34.17	86.05	94.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

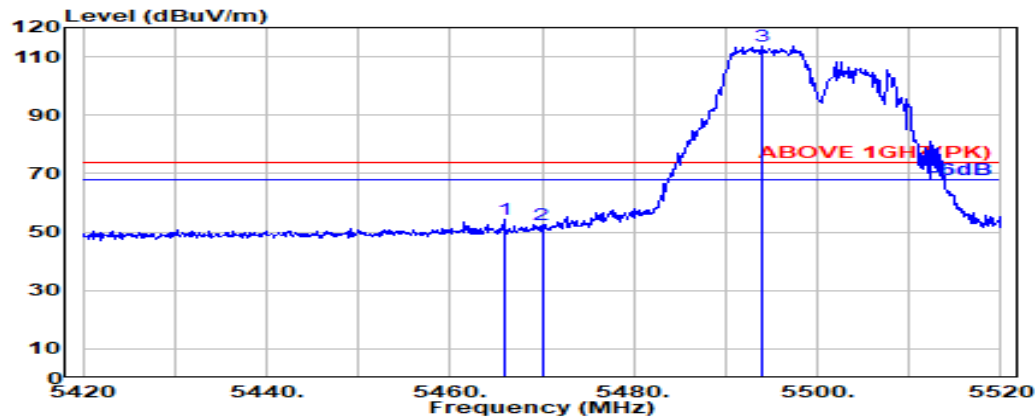

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.17	8.73	34.18	45.61	54.33	74.00	19.67	Peak
5470.000	34.16	8.74	34.18	43.75	52.47	74.00	21.53	Peak
@ 5494.100	34.11	8.75	34.17	104.87	113.56	---	---	Peak

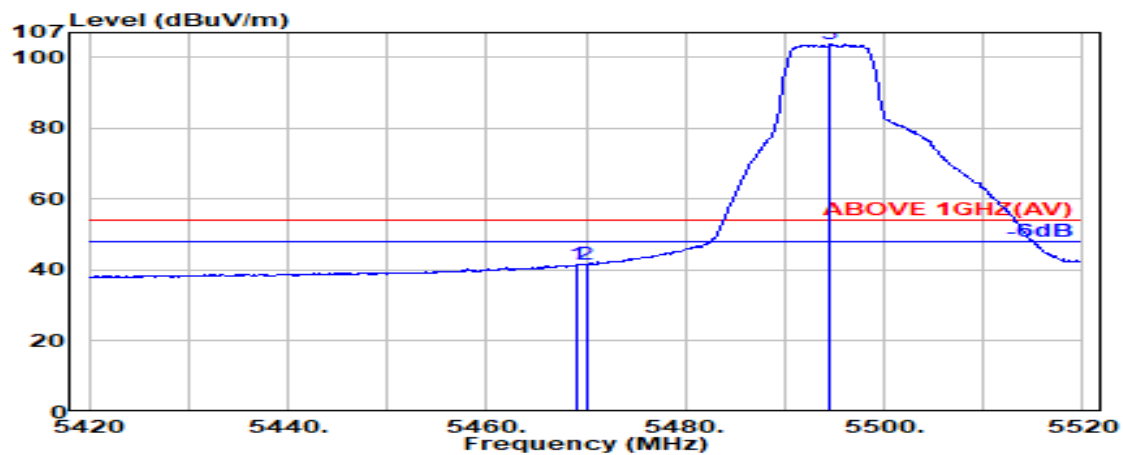

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	32.68	41.40	54.00	12.60	Average
5470.000	34.16	8.74	34.18	32.78	41.50	54.00	12.50	Average
@ 5494.500	34.11	8.75	34.17	95.11	103.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

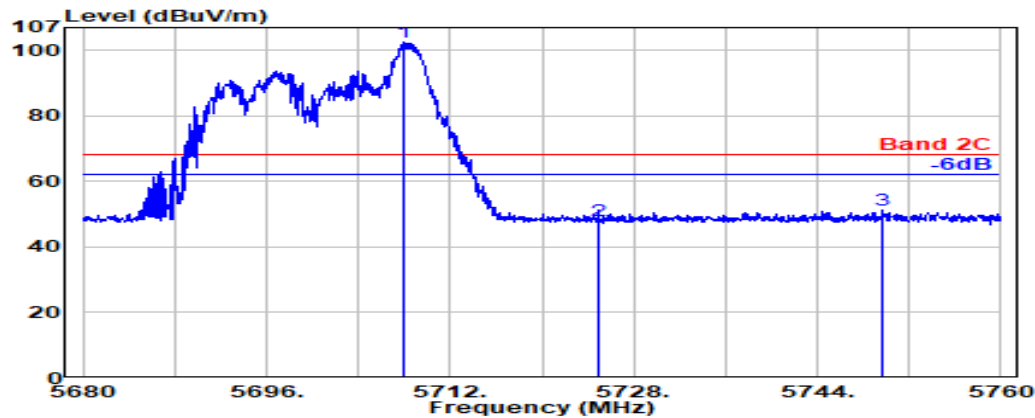

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5708.050	33.80	8.87	34.27	93.96	102.36	---	---	Peak
5725.000	33.80	8.88	34.28	39.77	48.18	68.20	20.02	Peak
5749.600	33.80	8.89	34.29	42.68	51.09	68.20	17.11	Peak

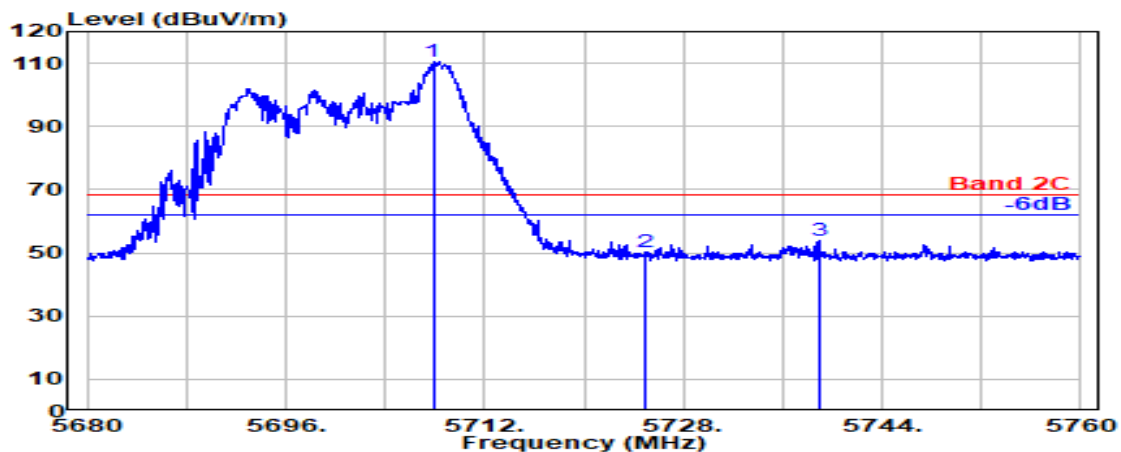

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5707.850	33.80	8.87	34.27	102.11	110.52	---	---	Peak
5725.000	33.80	8.88	34.28	41.87	50.27	68.20	17.93	Peak
5739.000	33.80	8.89	34.28	45.32	53.73	68.20	14.47	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

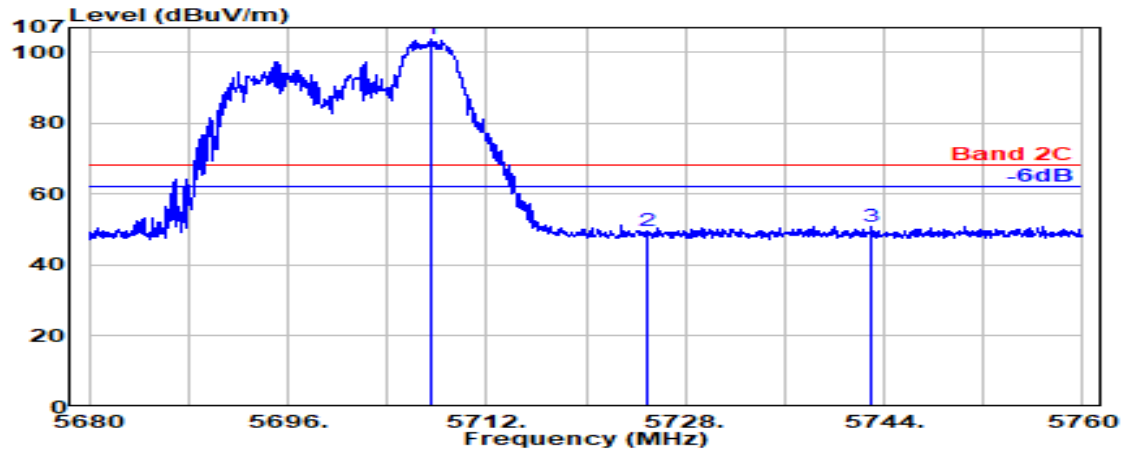

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.500	33.80	8.87	34.27	95.33	103.73	---	---	Peak
5725.000	33.80	8.88	34.28	41.35	49.76	68.20	18.44	Peak
5742.900	33.80	8.89	34.28	42.51	50.92	68.20	17.28	Peak

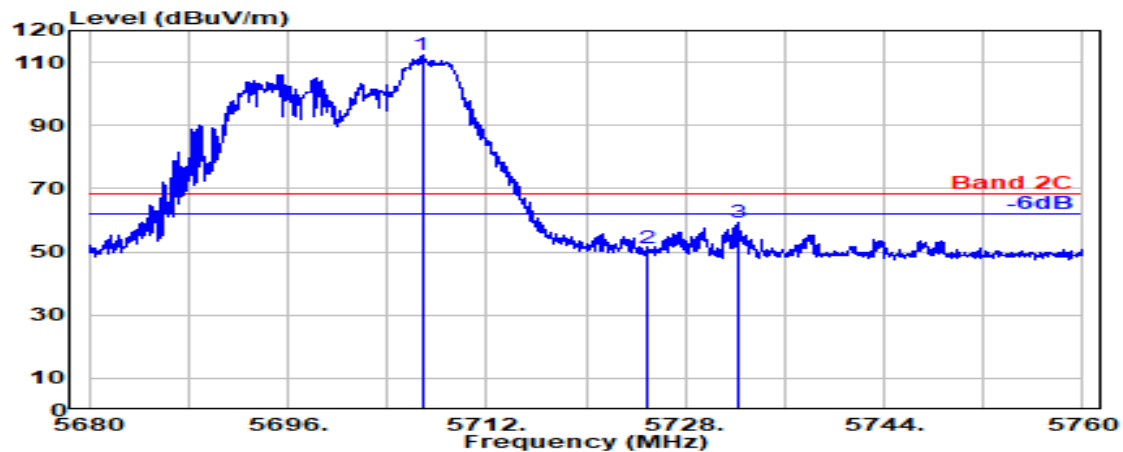

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.800	33.80	8.87	34.27	103.84	112.25	---	---	Peak
5725.000	33.80	8.88	34.28	42.61	51.01	68.20	17.19	Peak
5732.250	33.80	8.88	34.28	50.79	59.20	68.20	9.00	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

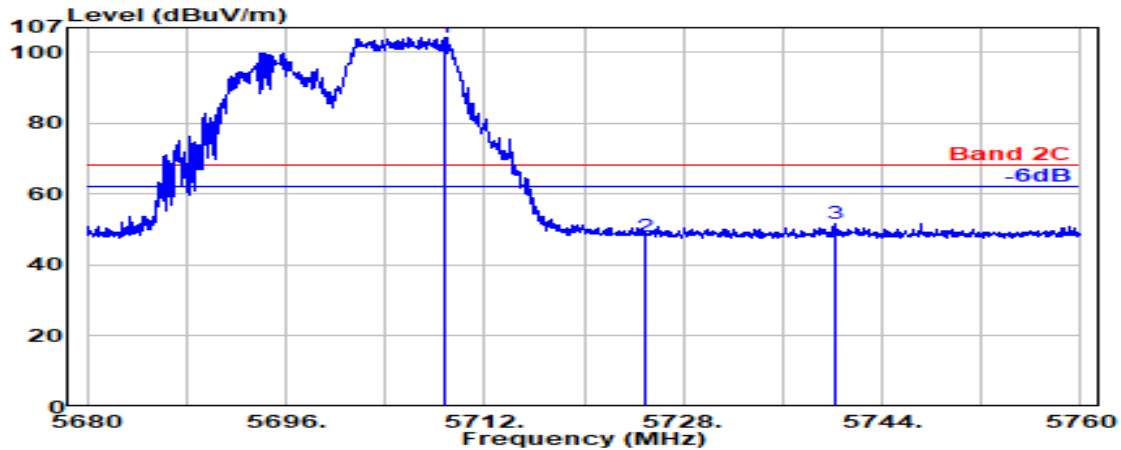

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.800	33.80	8.87	34.27	95.88	104.28	---	---	Peak
5725.000	33.80	8.88	34.28	39.69	48.10	68.20	20.10	Peak
5740.150	33.80	8.89	34.28	43.31	51.71	68.20	16.49	Peak

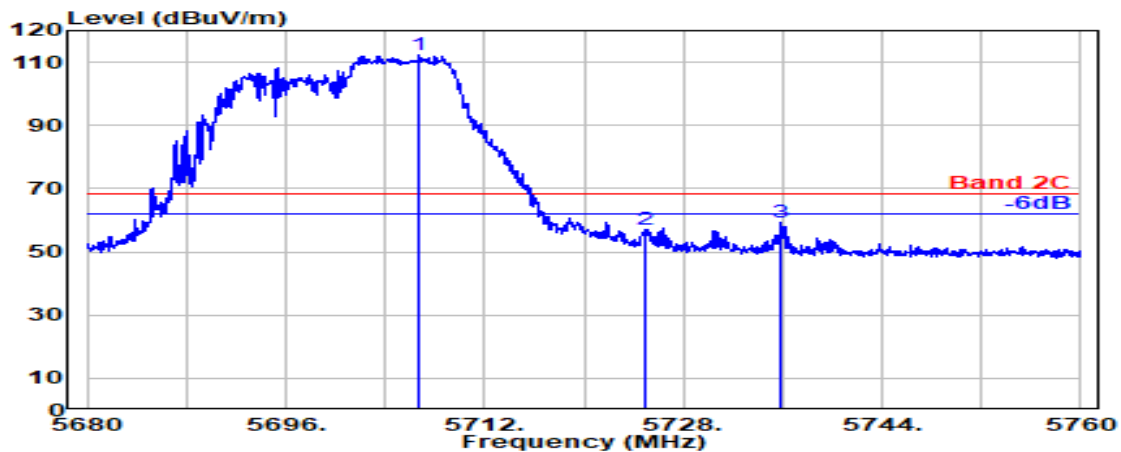

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.650	33.80	8.87	34.27	103.76	112.16	---	---	Peak
5725.000	33.80	8.88	34.28	48.64	57.05	68.20	11.15	Peak
5735.800	33.80	8.89	34.28	50.76	59.17	68.20	9.03	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

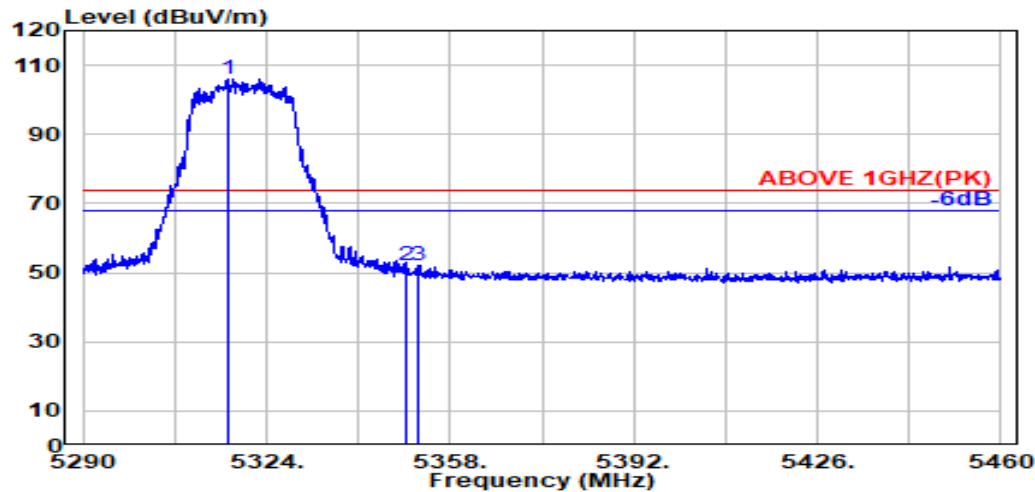

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.03	8.65	34.23	97.63	106.08	---	---	Peak
5350.000	33.90	8.67	34.22	43.73	52.08	74.00	21.92	Peak
5352.200	33.91	8.67	34.22	43.91	52.27	74.00	21.73	Peak

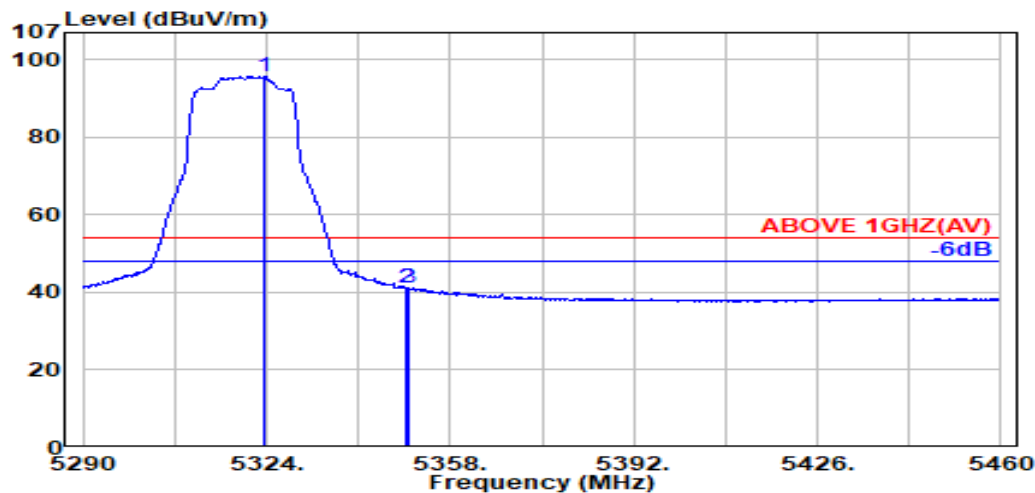

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	34.01	8.65	34.22	87.45	95.88	---	---	Average
5350.000	33.90	8.67	34.22	32.92	41.26	54.00	12.74	Average
5350.400	33.90	8.67	34.22	32.75	41.11	54.00	12.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

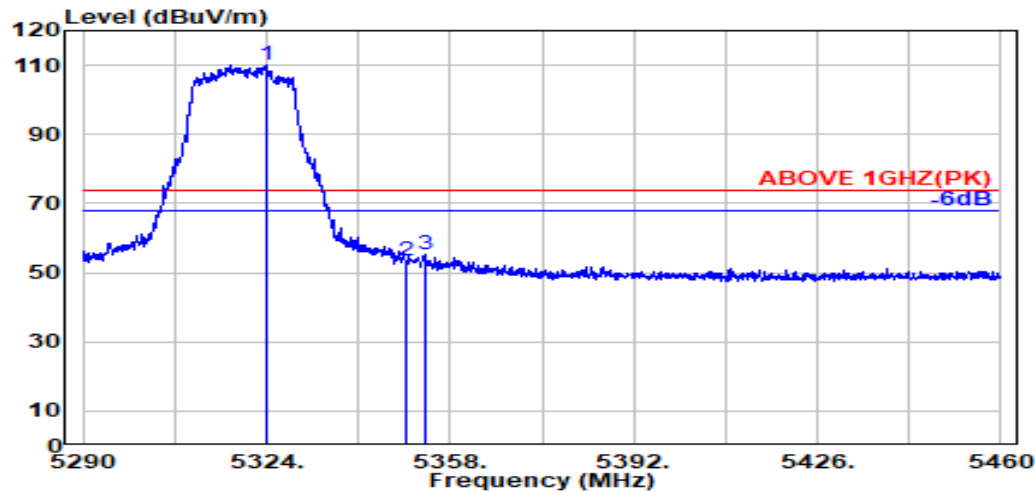

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	34.00	8.65	34.22	101.81	110.24	---	---	Peak
5350.000	33.90	8.67	34.22	44.96	53.31	74.00	20.69	Peak
5353.400	33.91	8.67	34.22	46.95	55.31	74.00	18.69	Peak

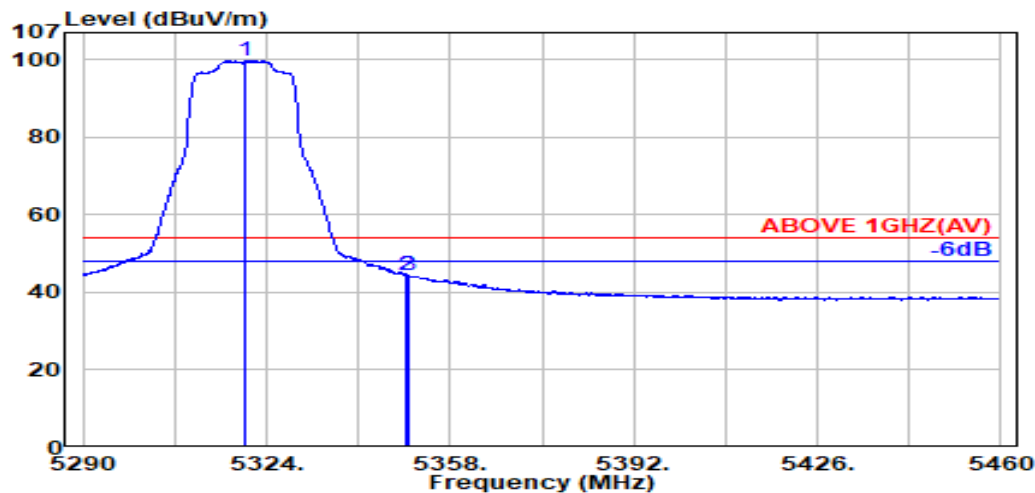

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.100	34.02	8.65	34.23	91.27	99.71	---	---	Average
5350.000	33.90	8.67	34.22	36.15	44.50	54.00	9.50	Average
5350.400	33.90	8.67	34.22	36.03	44.38	54.00	9.62	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

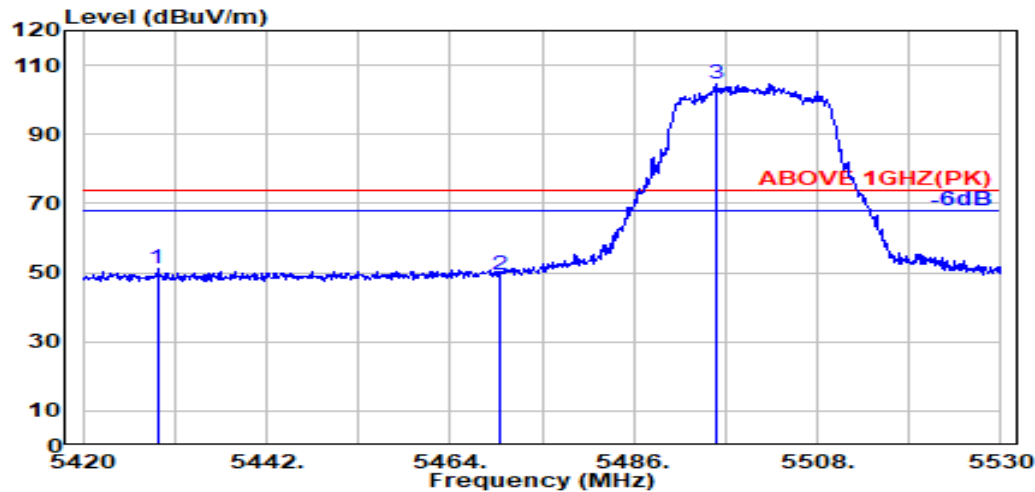

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.900	34.16	8.71	34.19	42.37	51.05	74.00	22.95	Peak
5470.000	34.16	8.74	34.18	40.84	49.56	74.00	24.44	Peak
@ 5495.900	34.11	8.75	34.17	96.08	104.77	---	---	Peak

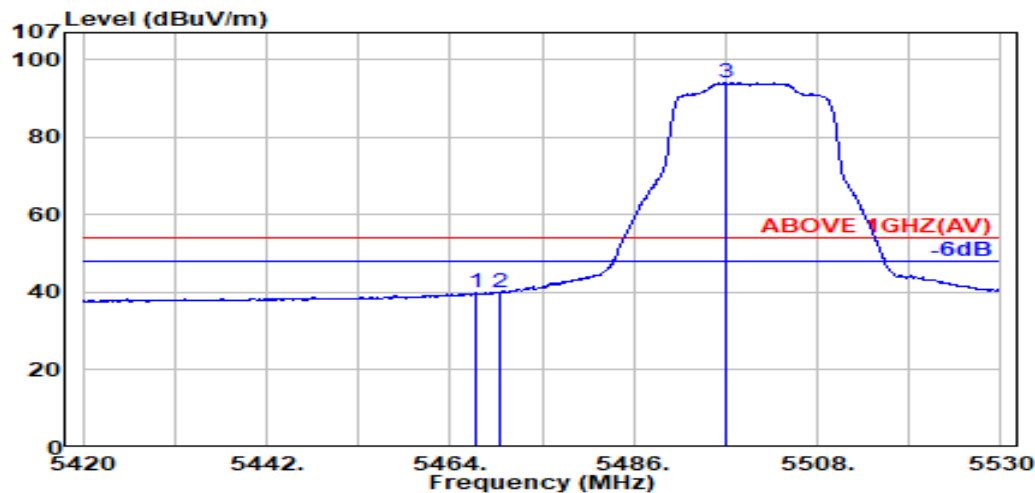

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.17	8.73	34.18	31.16	39.88	54.00	14.12	Average
5470.000	34.16	8.74	34.18	31.21	39.93	54.00	14.07	Average
@ 5497.100	34.11	8.75	34.17	85.34	94.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

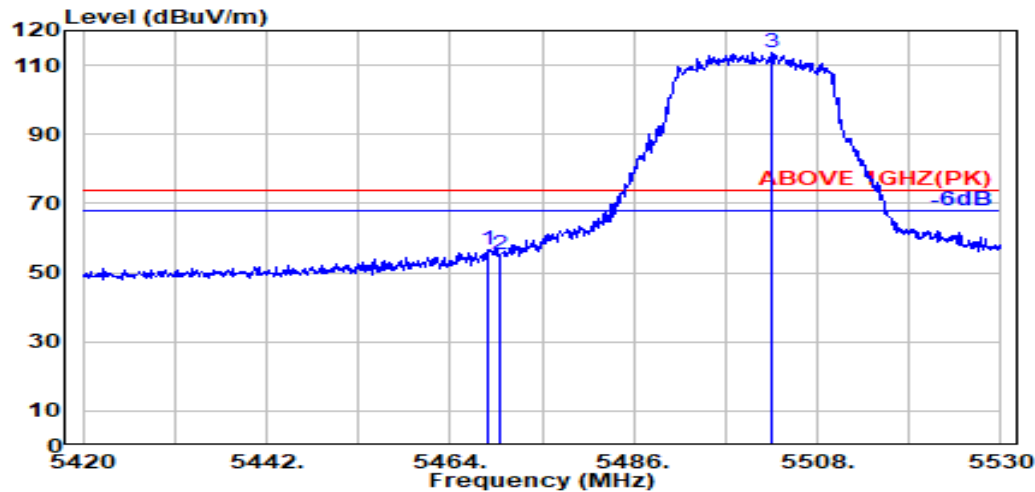

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	48.08	56.80	74.00	17.20	Peak
5470.000	34.16	8.74	34.18	46.62	55.34	74.00	18.66	Peak
@ 5502.400	34.10	8.75	34.17	105.06	113.75	---	---	Peak

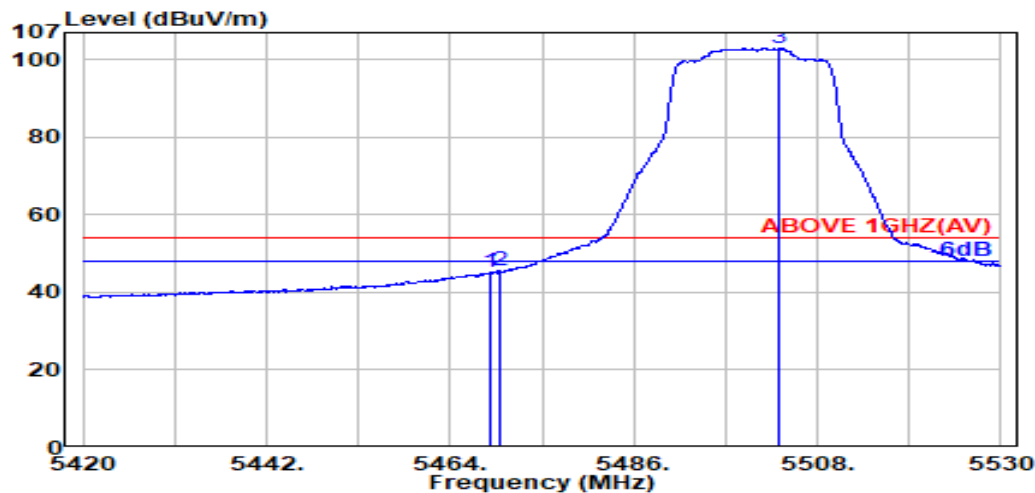

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	36.50	45.22	54.00	8.78	Average
5470.000	34.16	8.74	34.18	36.73	45.45	54.00	8.55	Average
@ 5503.500	34.10	8.76	34.17	94.28	102.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

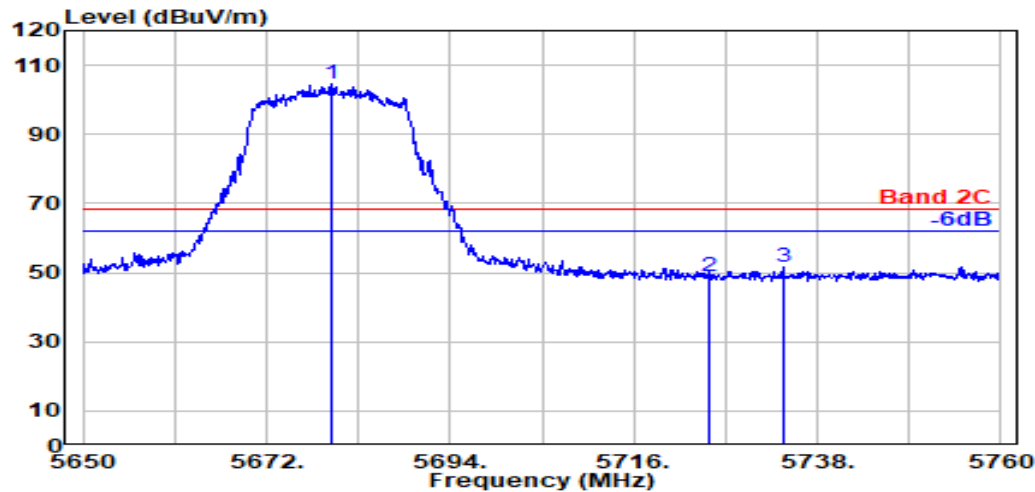

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.700	33.88	8.86	34.25	96.11	104.59	---	---	Peak
5725.000	33.80	8.88	34.28	40.45	48.86	68.20	19.34	Peak
5733.900	33.80	8.89	34.28	43.21	51.62	68.20	16.58	Peak

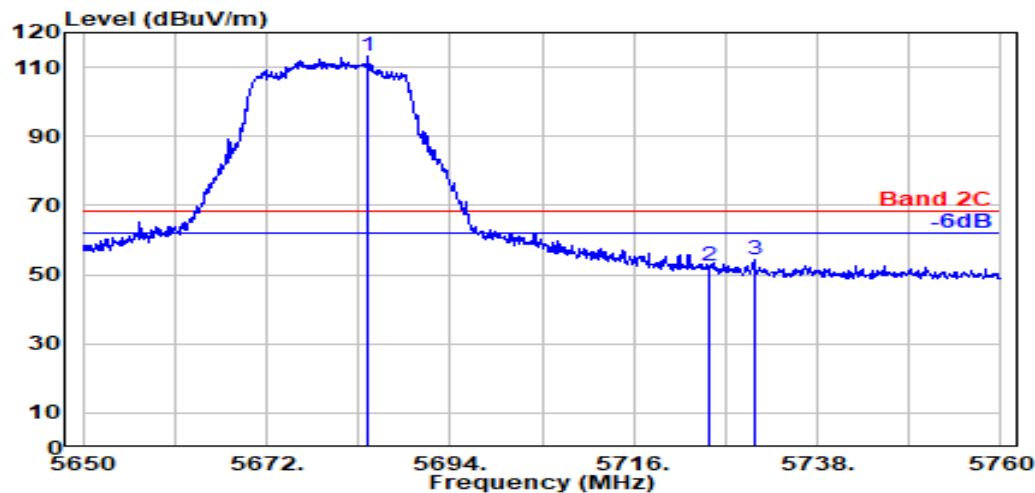

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5684.100	33.86	8.86	34.26	104.79	113.25	---	---	Peak
5725.000	33.80	8.88	34.28	44.26	52.66	68.20	15.54	Peak
5730.500	33.80	8.88	34.28	46.05	54.46	68.20	13.74	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

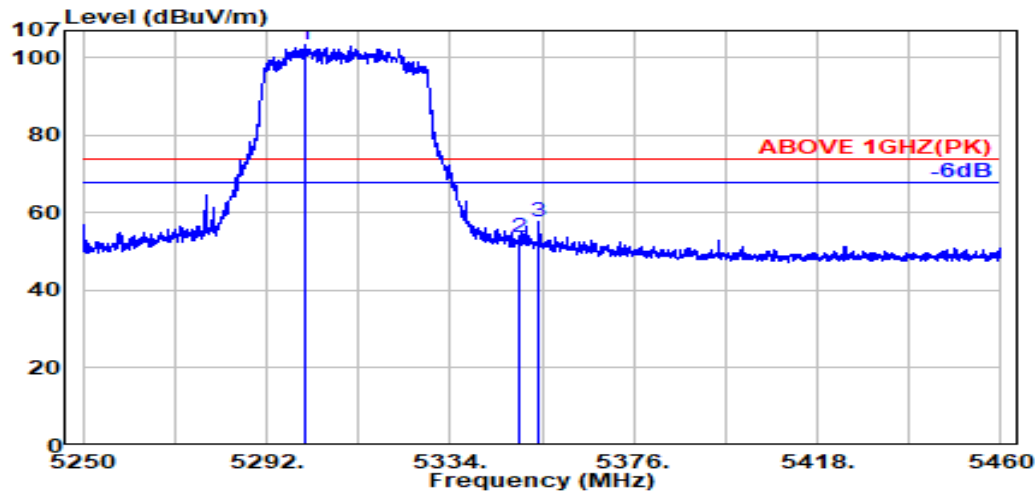

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.000	34.10	8.64	34.23	94.77	103.27	---	---	Peak
5350.000	33.90	8.67	34.22	45.46	53.81	74.00	20.19	Peak
5354.400	33.92	8.67	34.22	49.45	57.82	74.00	16.18	Peak

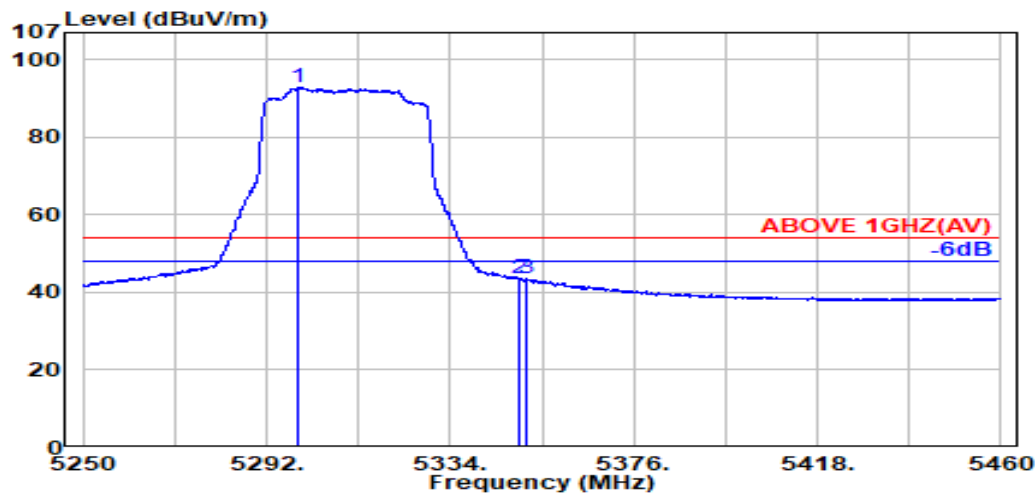

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.100	34.09	8.63	34.23	84.35	92.85	---	---	Average
5350.000	33.90	8.67	34.22	35.20	43.54	54.00	10.46	Average
5351.600	33.91	8.67	34.22	35.07	43.43	54.00	10.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

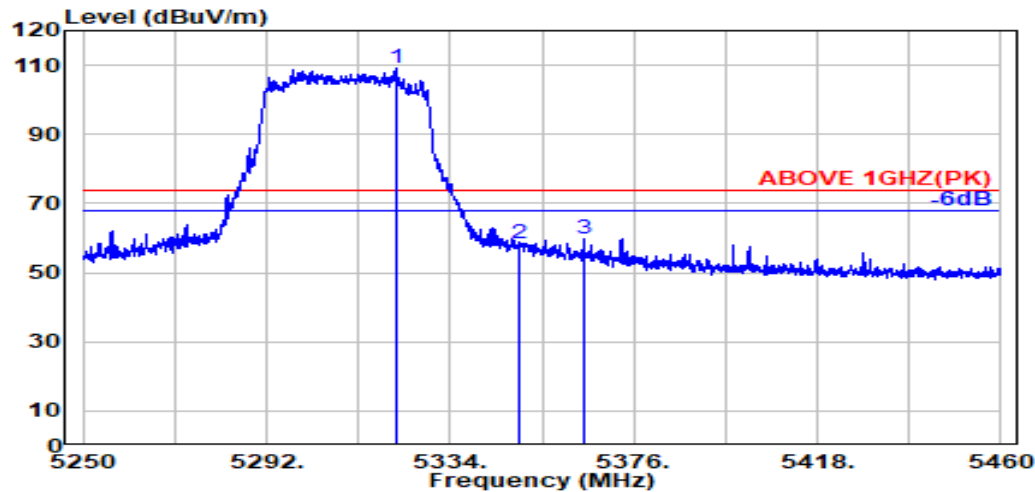

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.500	34.01	8.65	34.23	100.53	108.97	---	---	Peak
5350.000	33.90	8.67	34.22	50.27	58.62	74.00	15.38	Peak
5364.400	33.96	8.67	34.21	51.57	59.99	74.00	14.01	Peak

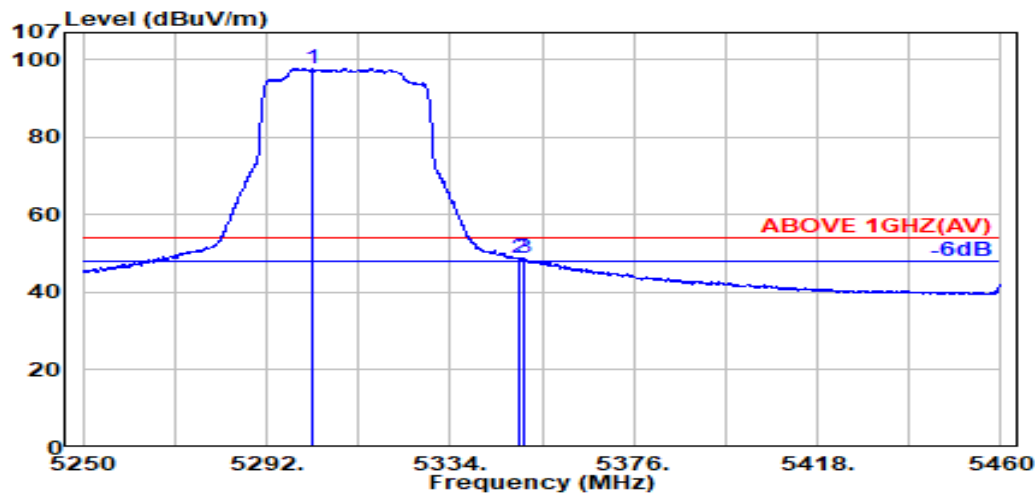

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.500	34.09	8.64	34.23	89.29	97.78	---	---	Average
5350.000	33.90	8.67	34.22	40.49	48.84	54.00	5.16	Average
5350.900	33.90	8.67	34.22	40.62	48.97	54.00	5.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

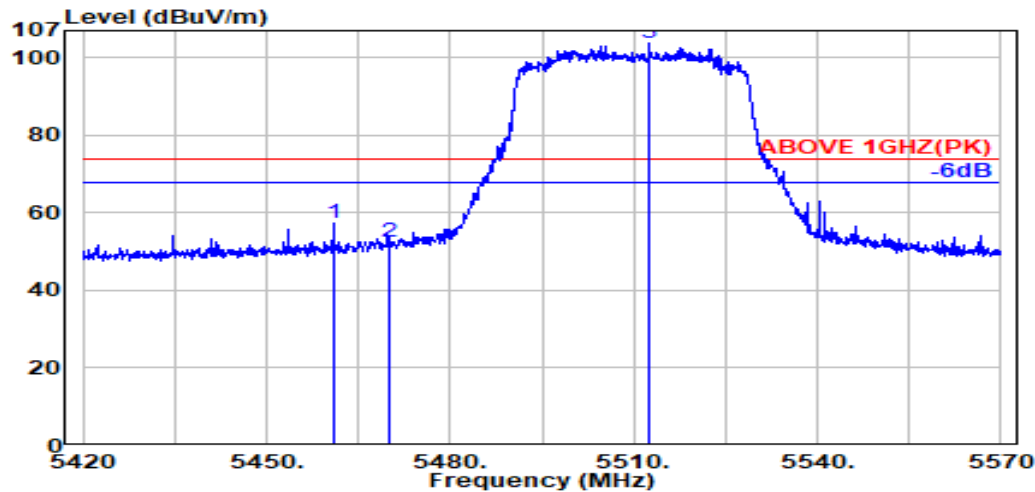

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.000	34.18	8.73	34.18	48.64	57.37	74.00	16.63	Peak
5470.000	34.16	8.74	34.18	43.64	52.36	74.00	21.64	Peak
@ 5512.500	34.10	8.76	34.18	95.05	103.73	---	---	Peak

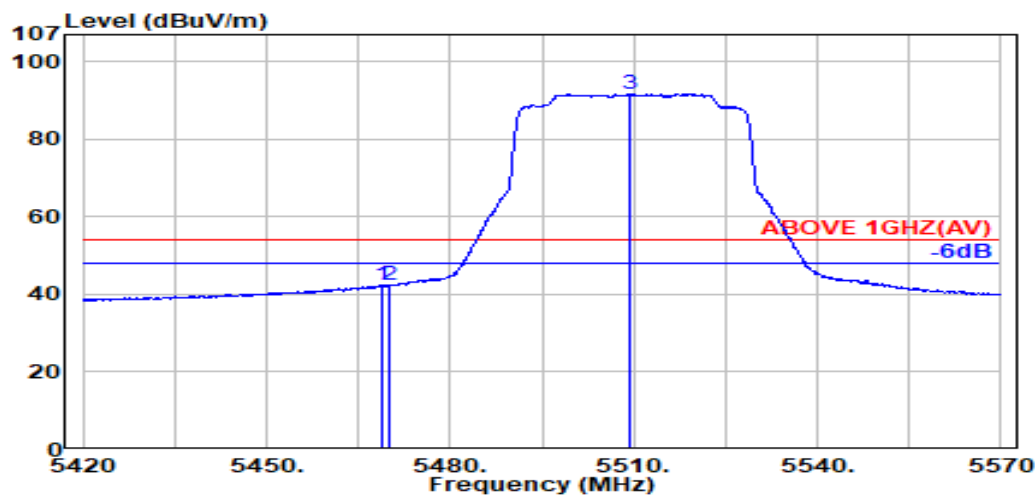

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	33.75	42.47	54.00	11.53	Average
5470.000	34.16	8.74	34.18	33.55	42.27	54.00	11.73	Average
@ 5509.300	34.10	8.76	34.17	83.07	91.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

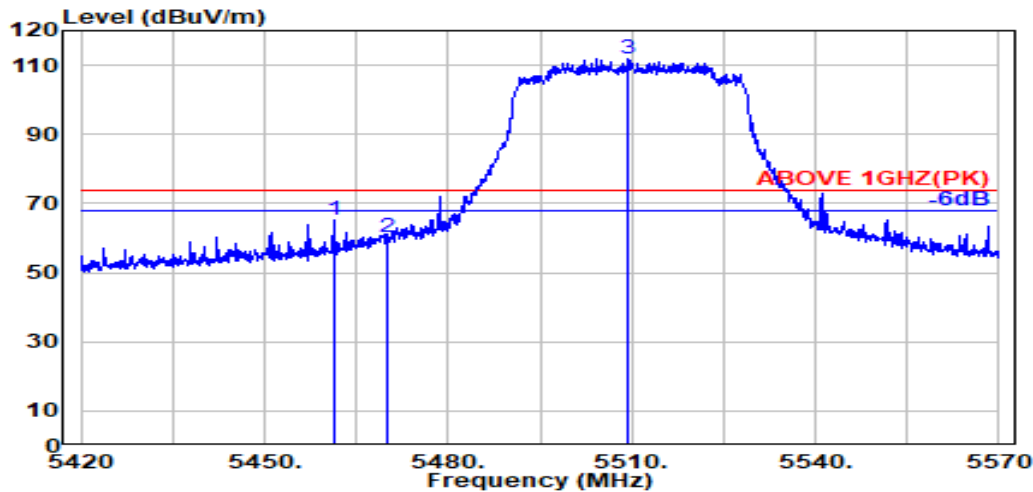

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.18	8.73	34.18	56.31	65.03	74.00	8.97	Peak
5470.000	34.16	8.74	34.18	51.30	60.02	74.00	13.98	Peak
@ 5509.500	34.10	8.76	34.17	103.34	112.02	---	---	Peak

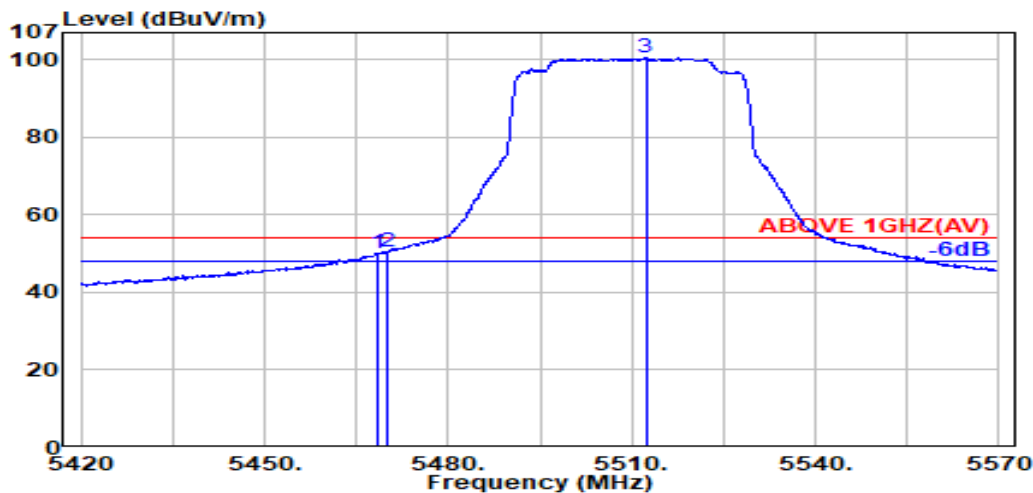

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	41.40	50.11	54.00	3.89	Average
5470.000	34.16	8.74	34.18	41.81	50.52	54.00	3.48	Average
@ 5512.300	34.10	8.76	34.18	91.85	100.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

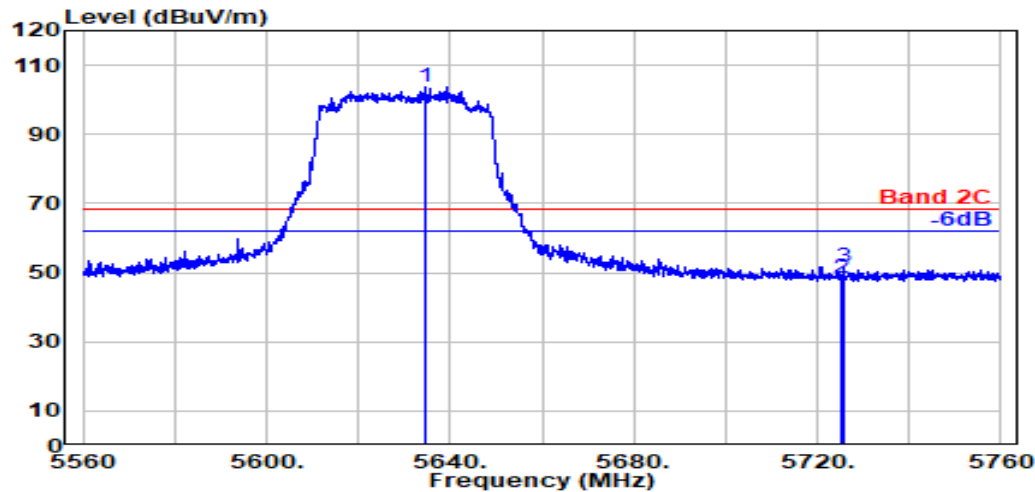

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5634.700	34.00	8.83	34.23	95.18	103.77	---	---	Peak
	5725.000	33.80	8.88	34.28	39.96	48.37	68.20	19.83	Peak
	5725.800	33.80	8.88	34.28	43.02	51.43	68.20	16.77	Peak

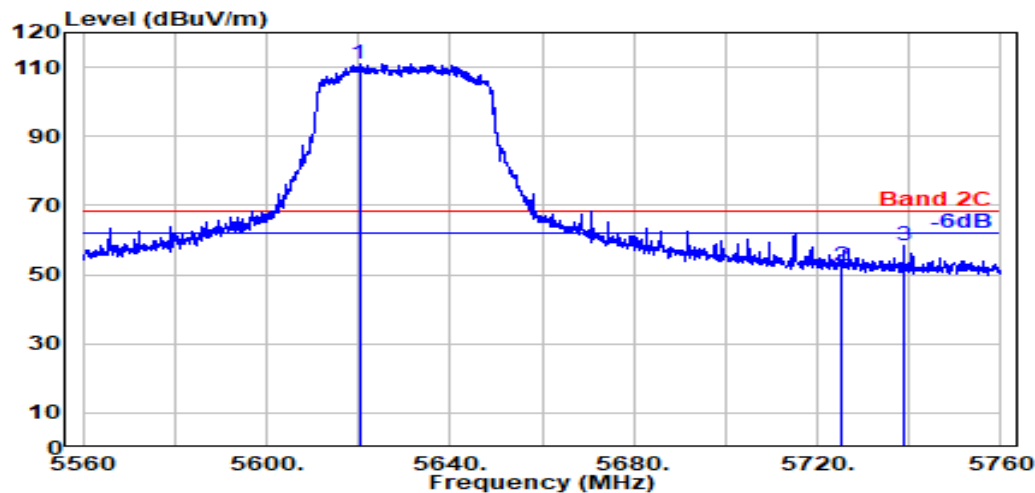

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5620.200	34.00	8.82	34.23	102.24	110.84	---	---	Peak
	5725.000	33.80	8.88	34.28	44.01	52.42	68.20	15.78	Peak
	5739.000	33.80	8.89	34.28	50.14	58.55	68.20	9.65	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	996/67	Frequency	TX 5250MHz

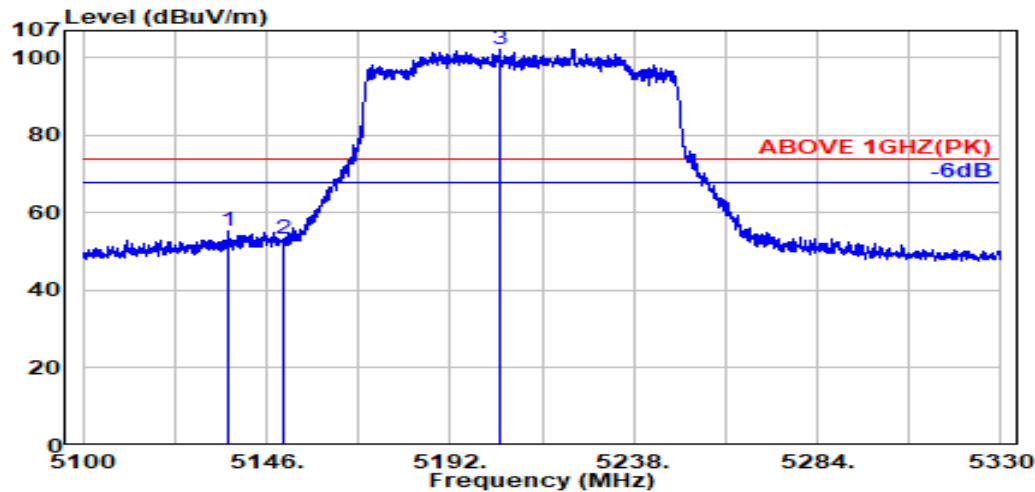

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.200	33.70	8.54	34.28	47.20	55.15	74.00	18.85	Peak
5150.000	33.70	8.54	34.28	45.53	53.49	74.00	20.51	Peak
@ 5204.300	33.71	8.58	34.26	94.26	102.28	---	---	Peak

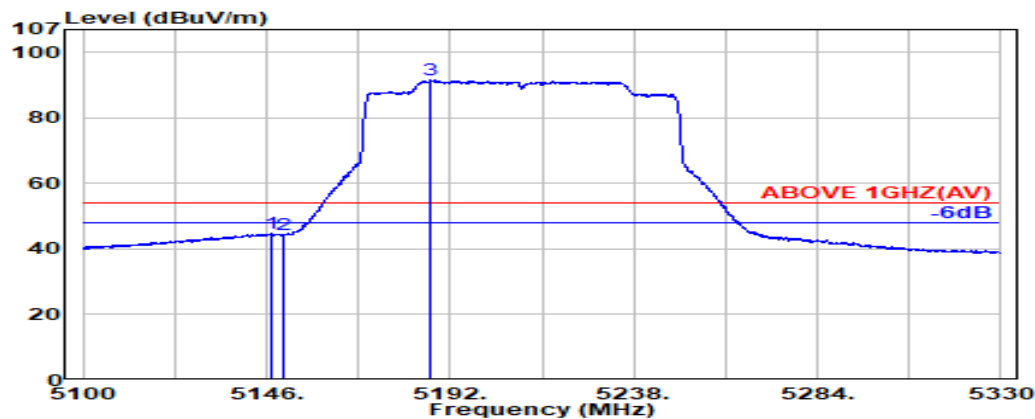

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.70	8.54	34.28	36.71	44.67	54.00	9.33	Average
5150.000	33.70	8.54	34.28	36.31	44.28	54.00	9.72	Average
@ 5187.000	33.70	8.57	34.27	83.53	91.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	996/67	Frequency	TX 5250MHz

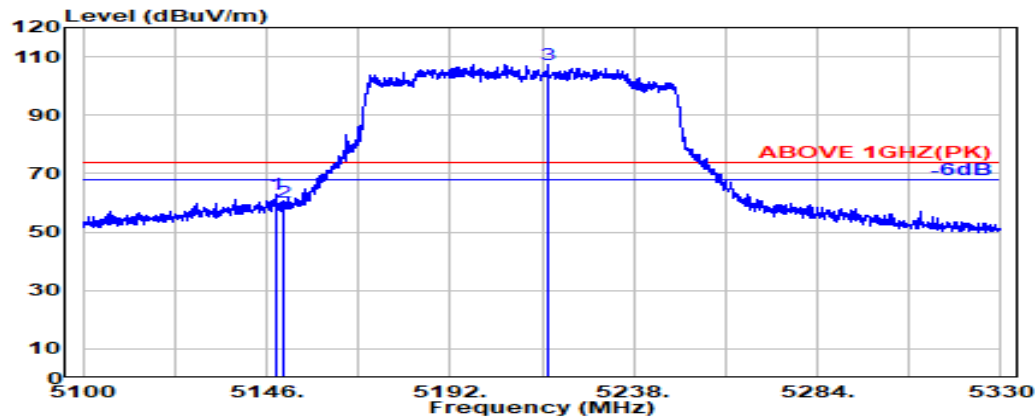

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.70	8.54	34.28	54.96	62.93	74.00	11.07	Peak
5150.000	33.70	8.54	34.28	52.08	60.04	74.00	13.96	Peak
@ 5216.400	33.73	8.58	34.26	99.37	107.43	---	---	Peak

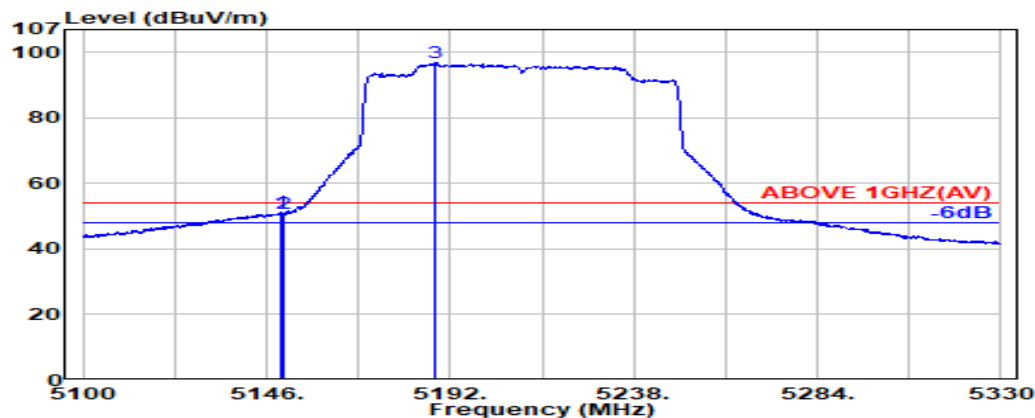

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	33.70	8.54	34.28	43.18	51.14	54.00	2.86	Average
5150.000	33.70	8.54	34.28	42.74	50.70	54.00	3.30	Average
@ 5188.400	33.70	8.57	34.27	88.77	96.77	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

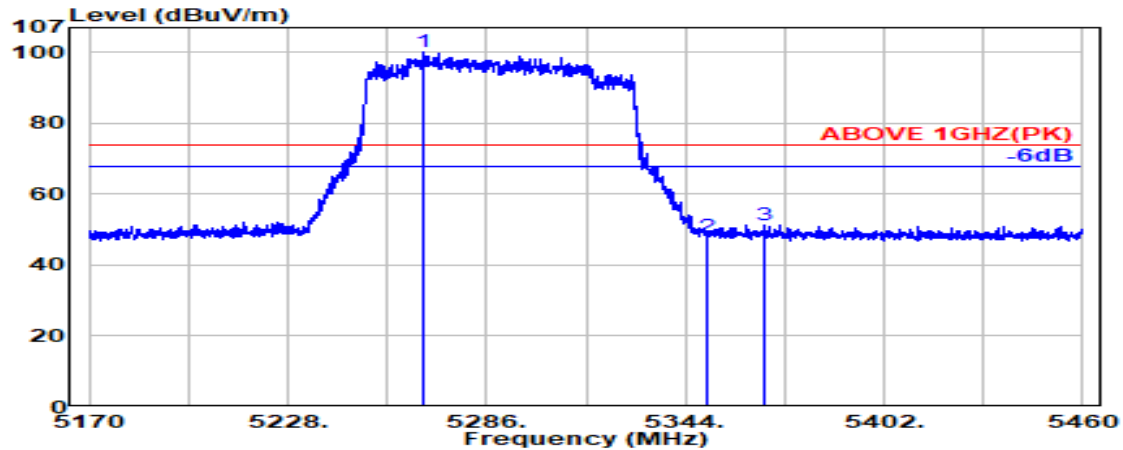

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5267.500	33.91	8.62	34.24	91.68	99.96	---	---	Peak
5350.000	33.90	8.67	34.22	39.59	47.94	74.00	26.06	Peak
5366.900	33.97	8.68	34.21	42.90	51.34	74.00	22.66	Peak

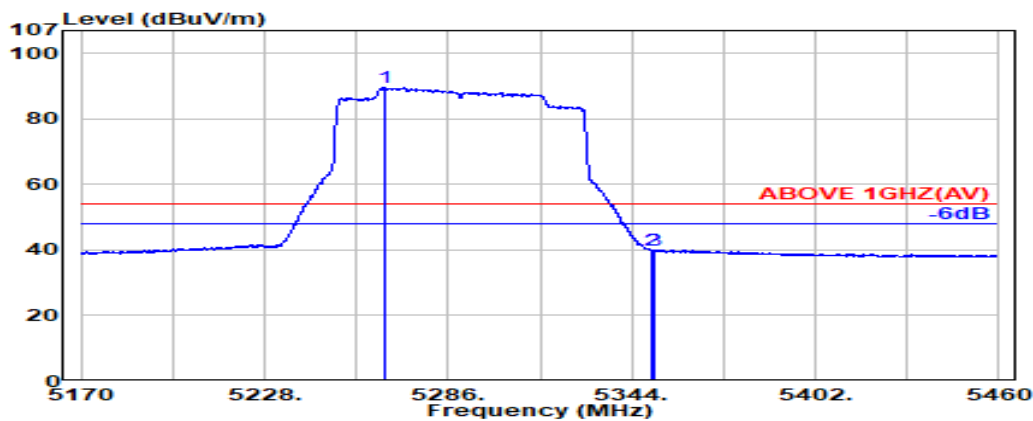

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5265.900	33.90	8.61	34.24	81.32	89.59	---	---	Average
5350.000	33.90	8.67	34.22	31.69	40.04	54.00	13.96	Average
5350.900	33.90	8.67	34.22	31.74	40.09	54.00	13.91	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

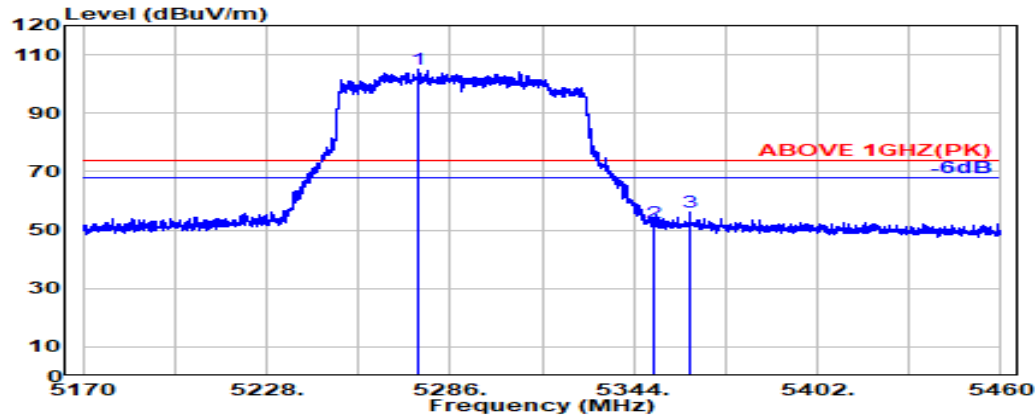

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.600	33.95	8.62	34.24	96.51	104.84	---	---	Peak
5350.000	33.90	8.67	34.22	44.39	52.74	74.00	21.26	Peak
5361.700	33.95	8.67	34.21	47.65	56.06	74.00	17.94	Peak

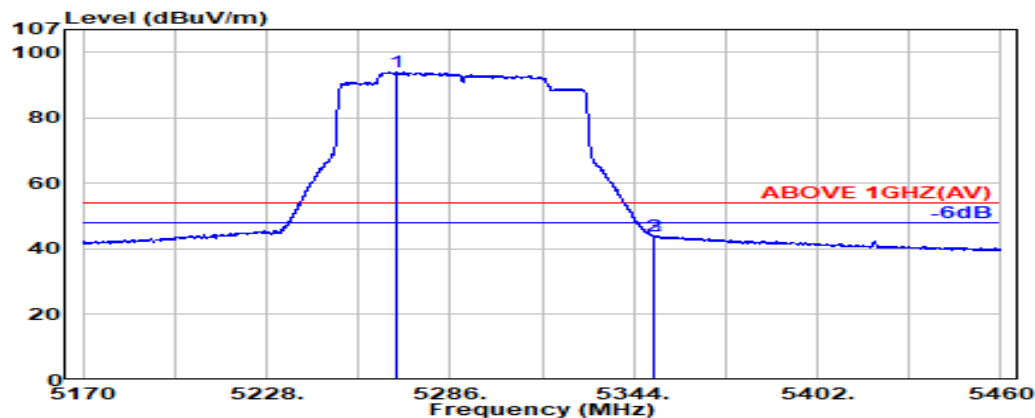

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.700	33.91	8.62	34.24	85.75	94.04	---	---	Average
5350.000	33.90	8.67	34.22	35.67	44.02	54.00	9.98	Average
5350.600	33.90	8.67	34.22	35.78	44.13	54.00	9.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

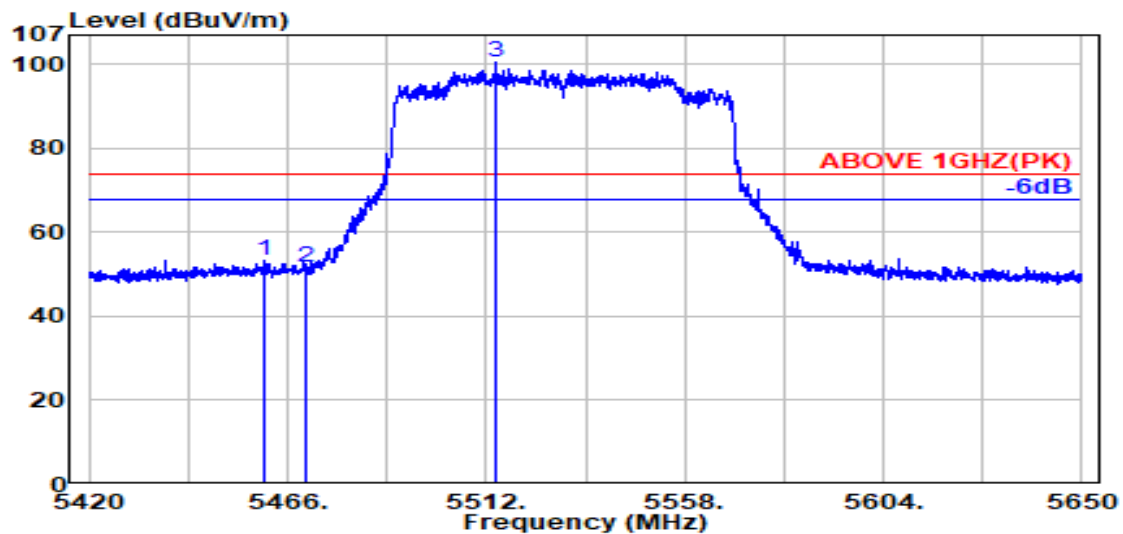

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.800	34.18	8.73	34.18	44.56	53.28	74.00	20.72	Peak
5470.000	34.16	8.74	34.18	42.90	51.62	74.00	22.38	Peak
@ 5514.100	34.10	8.76	34.18	91.82	100.51	---	---	Peak

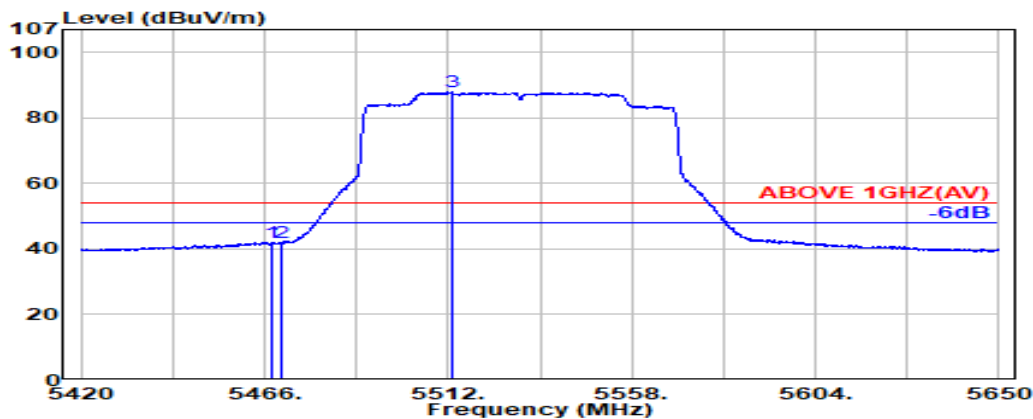

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.16	8.73	34.18	33.35	42.06	54.00	11.94	Average
5470.000	34.16	8.74	34.18	33.08	41.79	54.00	12.21	Average
@ 5513.200	34.10	8.76	34.18	79.18	87.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

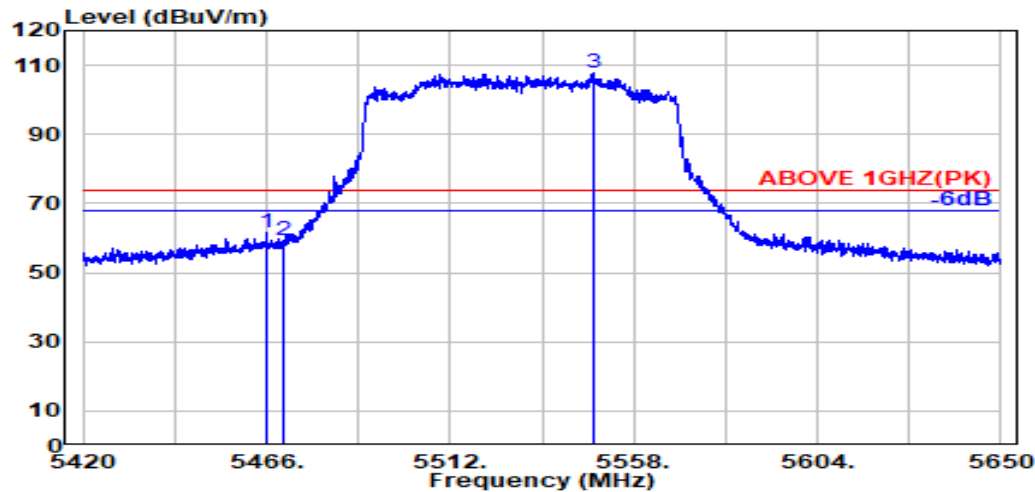

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	8.73	34.18	53.04	61.76	74.00	12.24	Peak
5470.000	34.16	8.74	34.18	50.49	59.21	74.00	14.79	Peak
@ 5547.700	34.10	8.78	34.19	99.27	107.96	---	---	Peak

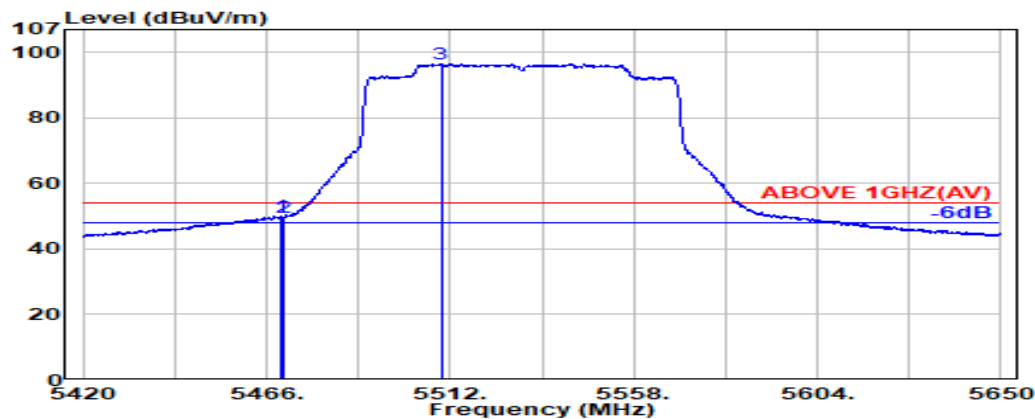

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.16	8.74	34.18	41.35	50.07	54.00	3.93	Average
5470.000	34.16	8.74	34.18	41.00	49.72	54.00	4.28	Average
@ 5509.700	34.10	8.76	34.17	87.90	96.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

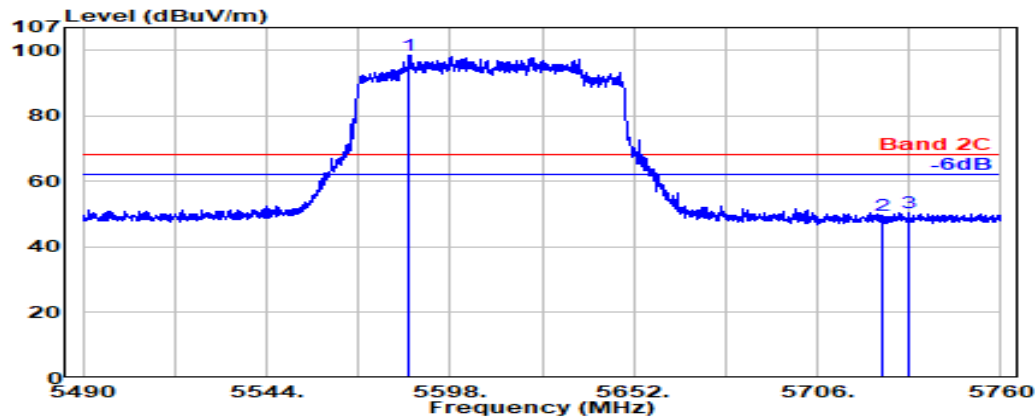

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5586.000	34.03	8.80	34.21	89.84	98.46	---	---	Peak
5725.000	33.80	8.88	34.28	41.29	49.69	68.20	18.51	Peak
5732.800	33.80	8.89	34.28	41.97	50.38	68.20	17.82	Peak

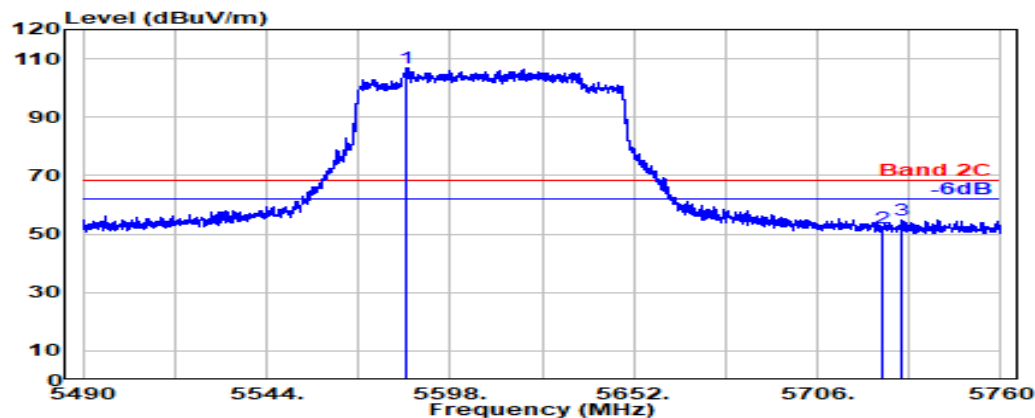

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5585.300	34.03	8.80	34.21	98.45	107.07	---	---	Peak
5725.000	33.80	8.88	34.28	43.68	52.09	68.20	16.11	Peak
5731.000	33.80	8.88	34.28	46.53	54.93	68.20	13.27	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

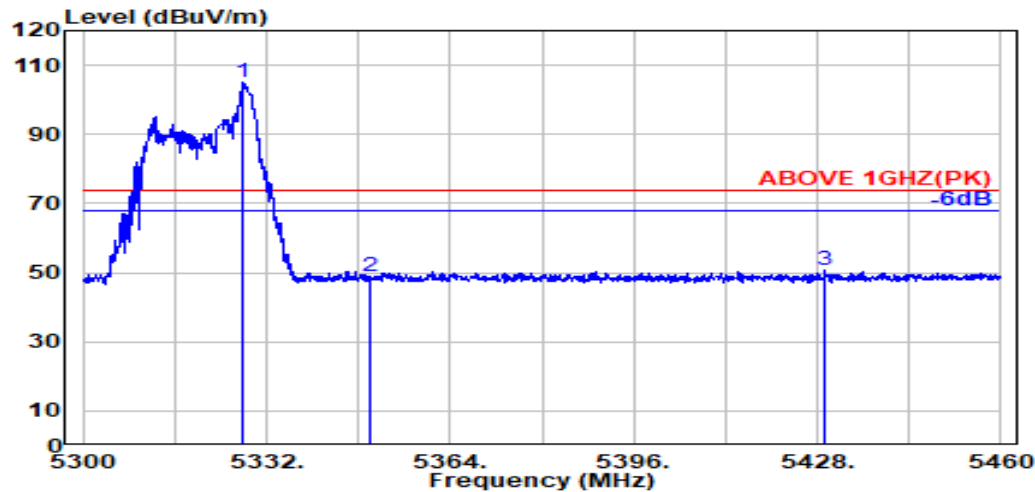

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.99	8.65	34.22	96.43	104.85	---	---	Peak
5350.000	33.90	8.67	34.22	40.57	48.91	74.00	25.09	Peak
5429.200	34.16	8.71	34.19	42.06	50.74	74.00	23.26	Peak

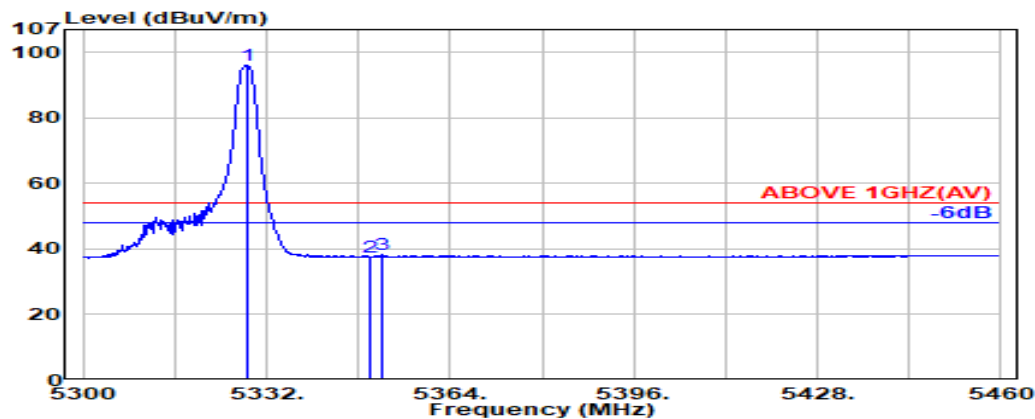

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.99	8.65	34.22	87.69	96.11	---	---	Average
5350.000	33.90	8.67	34.22	29.23	37.58	54.00	16.42	Average
5352.100	33.91	8.67	34.22	29.83	38.19	54.00	15.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

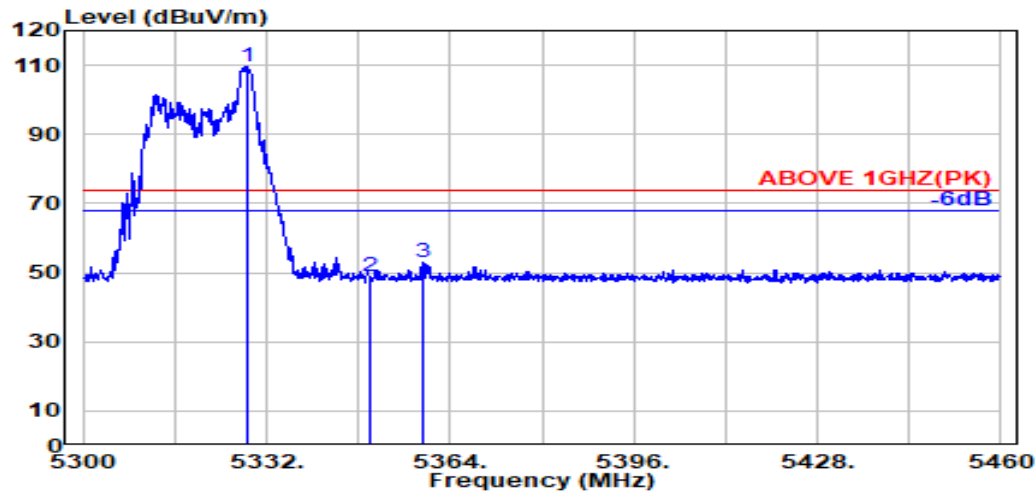

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.99	8.65	34.22	101.26	109.68	---	---	Peak
5350.000	33.90	8.67	34.22	40.43	48.78	74.00	25.22	Peak
5359.400	33.94	8.67	34.21	44.66	53.06	74.00	20.94	Peak

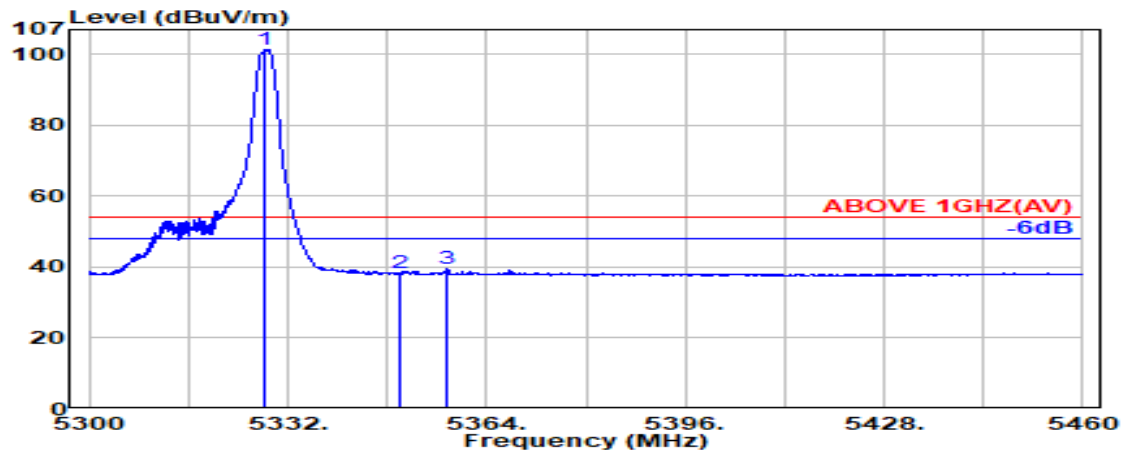

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.99	8.65	34.22	92.90	101.31	---	---	Average
5350.000	33.90	8.67	34.22	30.09	38.43	54.00	15.57	Average
5357.700	33.93	8.67	34.21	31.12	39.50	54.00	14.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

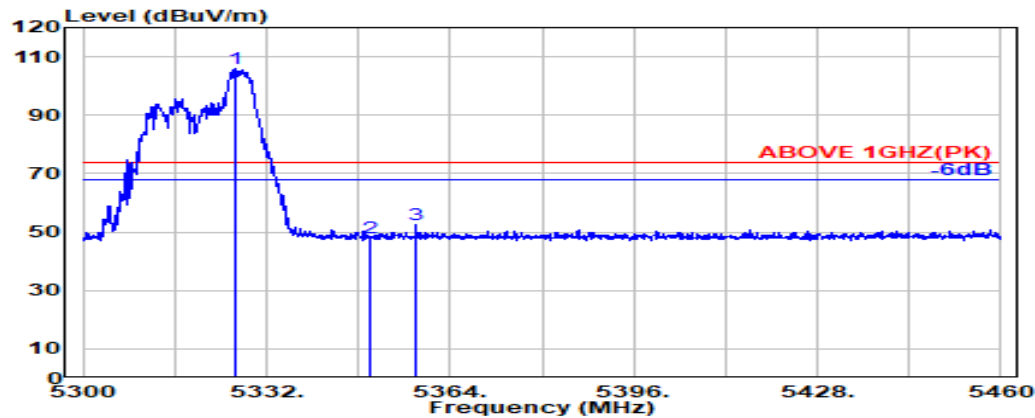

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	33.99	8.65	34.22	97.34	105.76	---	---	Peak
5350.000	33.90	8.67	34.22	39.81	48.16	74.00	25.84	Peak
5358.200	33.93	8.67	34.21	44.06	52.45	74.00	21.55	Peak

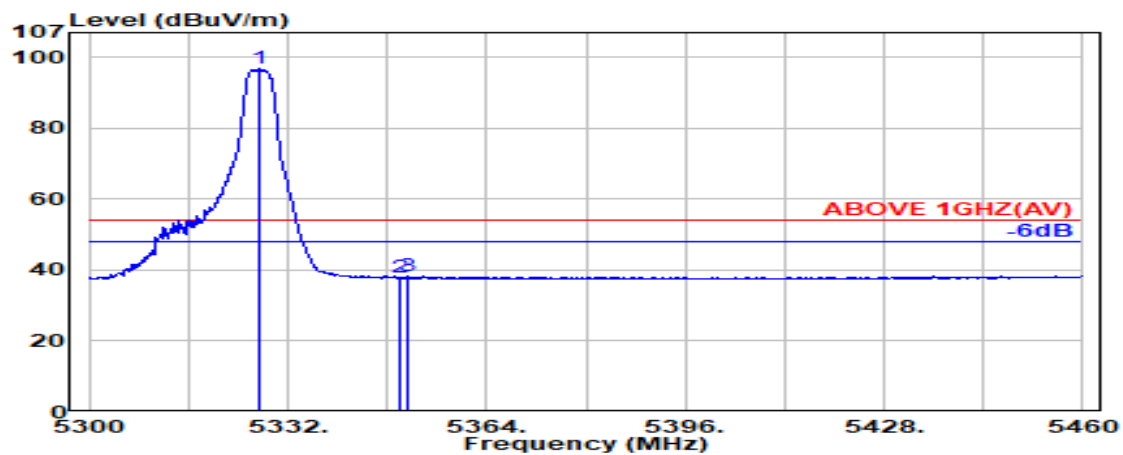

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.99	8.65	34.22	88.31	96.73	---	---	Average
5350.000	33.90	8.67	34.22	29.52	37.87	54.00	16.13	Average
5351.100	33.90	8.67	34.22	30.00	38.36	54.00	15.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

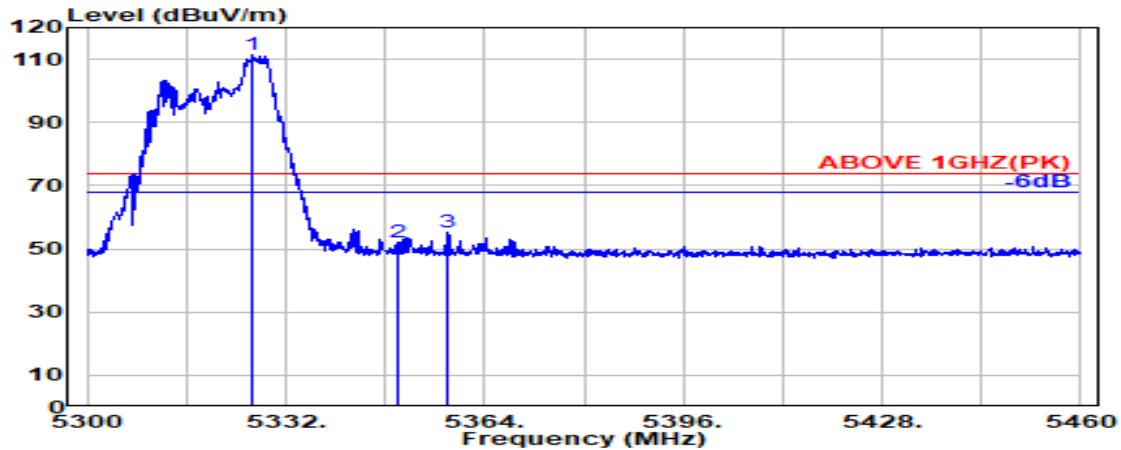

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5326.500	33.99	8.65	34.22	102.77	111.19	---	---	Peak
5350.000	33.90	8.67	34.22	43.68	52.02	74.00	21.98	Peak
5357.900	33.93	8.67	34.21	46.77	55.16	74.00	18.84	Peak

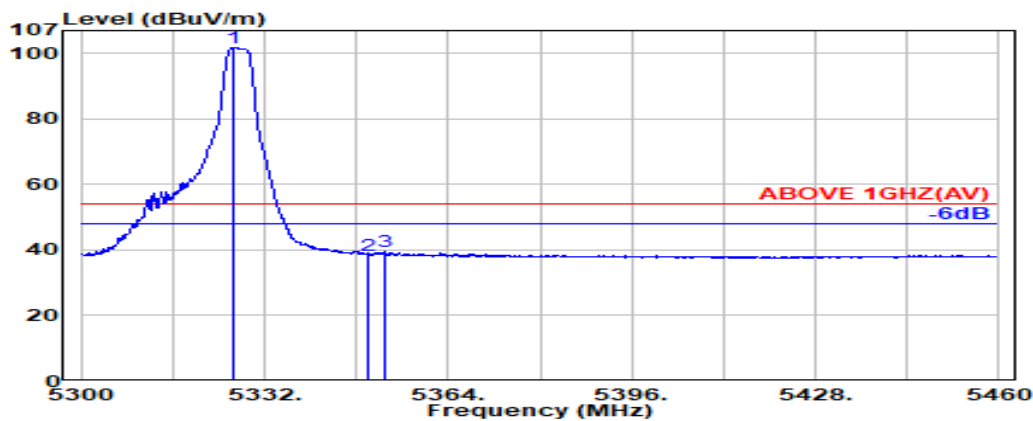

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5326.700	33.99	8.65	34.22	93.26	101.68	---	---	Average
5350.000	33.90	8.67	34.22	30.13	38.47	54.00	15.53	Average
5352.800	33.91	8.67	34.22	31.02	39.38	54.00	14.62	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

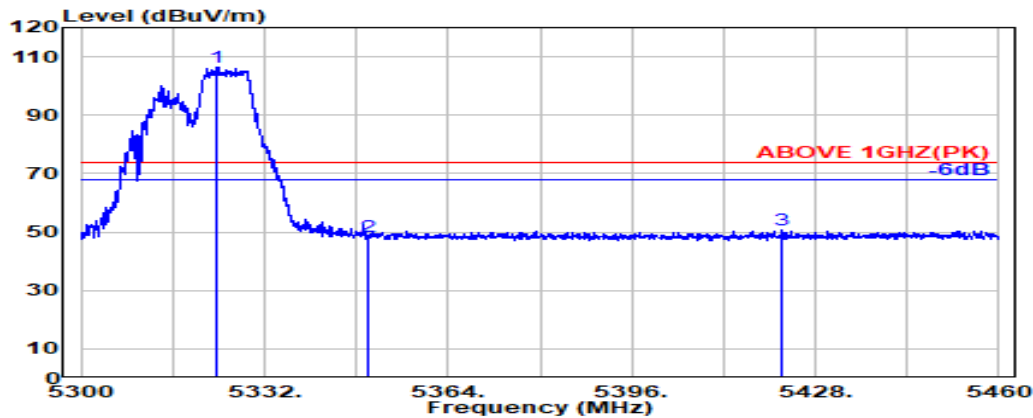

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	34.01	8.65	34.22	98.07	106.50	---	---	Peak
5350.000	33.90	8.67	34.22	40.26	48.61	74.00	25.39	Peak
5422.200	34.14	8.71	34.19	42.19	50.85	74.00	23.15	Peak

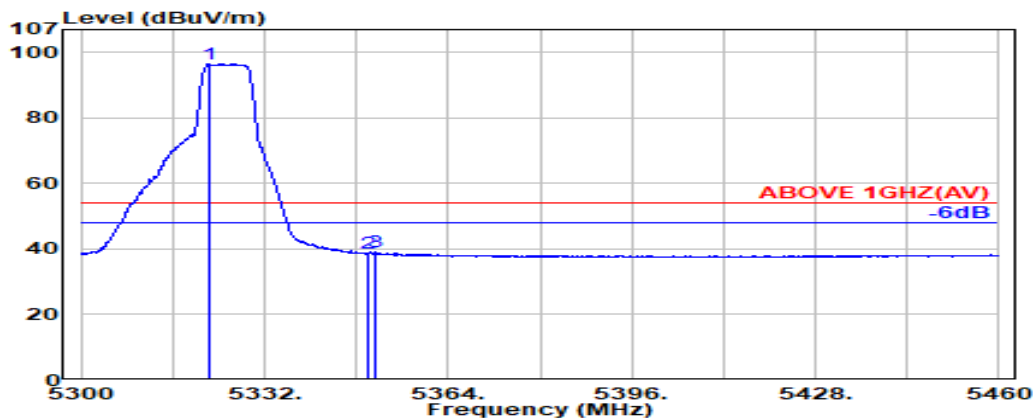

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.200	34.01	8.65	34.23	88.10	96.53	---	---	Average
5350.000	33.90	8.67	34.22	30.35	38.70	54.00	15.30	Average
5351.100	33.90	8.67	34.22	30.63	38.99	54.00	15.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

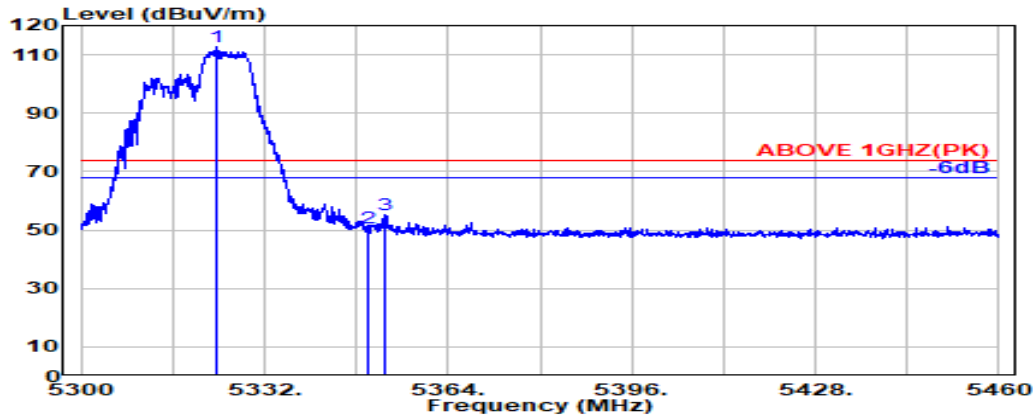

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	34.01	8.65	34.22	104.10	112.53	---	---	Peak
5350.000	33.90	8.67	34.22	42.37	50.72	74.00	23.28	Peak
5353.100	33.91	8.67	34.22	47.01	55.37	74.00	18.63	Peak

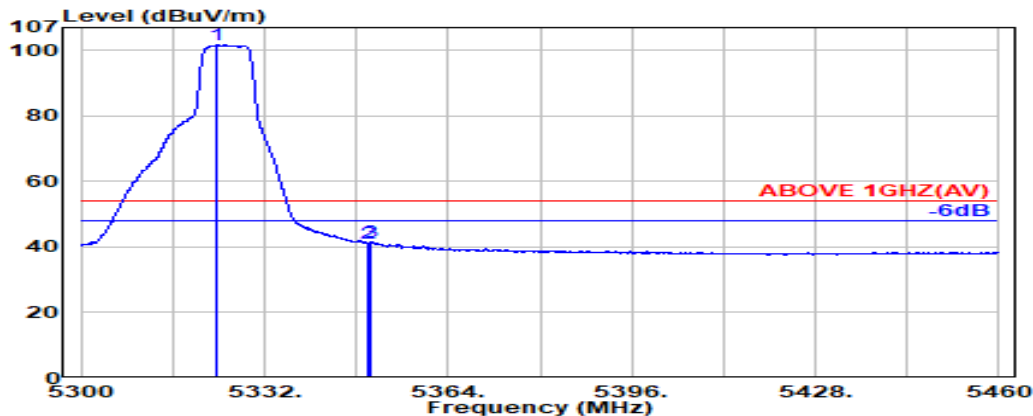

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	34.00	8.65	34.22	93.50	101.93	---	---	Average
5350.000	33.90	8.67	34.22	32.67	41.02	54.00	12.98	Average
5350.600	33.90	8.67	34.22	33.17	41.52	54.00	12.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

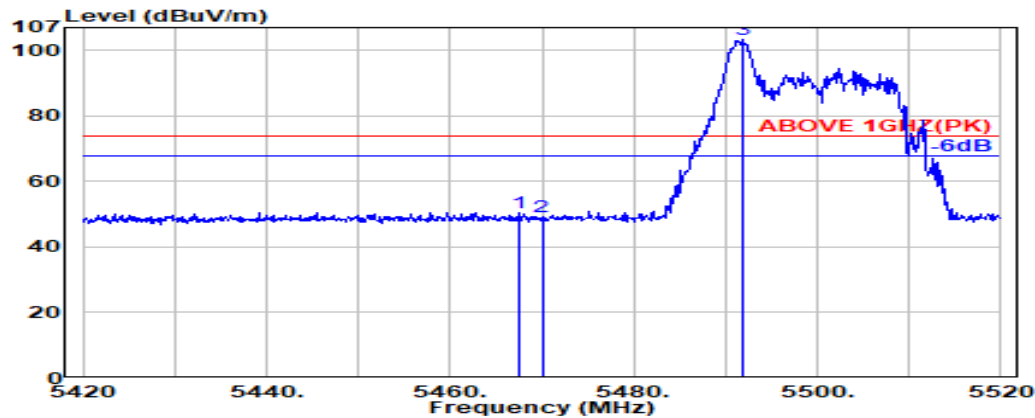

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.18	41.90	50.62	74.00	23.38	Peak
5470.000	34.16	8.74	34.18	40.74	49.46	74.00	24.54	Peak
@ 5491.900	34.12	8.75	34.17	94.48	103.17	---	---	Peak

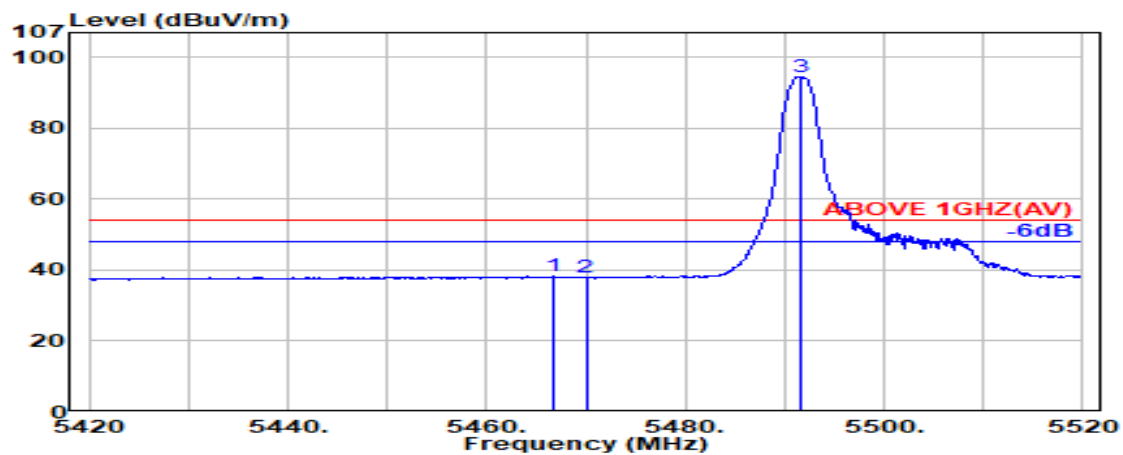

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.17	8.73	34.18	29.53	38.25	54.00	15.75	Average
5470.000	34.16	8.74	34.18	29.20	37.91	54.00	16.09	Average
@ 5491.700	34.12	8.75	34.17	85.75	94.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

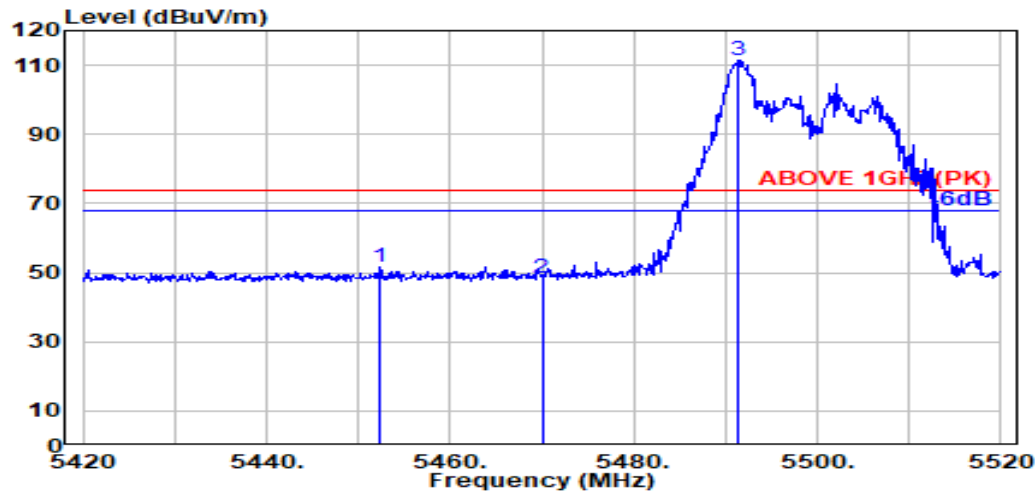

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.400	34.20	8.73	34.18	42.91	51.65	74.00	22.35	Peak
5470.000	34.16	8.74	34.18	39.84	48.56	74.00	25.44	Peak
@ 5491.300	34.12	8.75	34.17	102.77	111.47	---	---	Peak

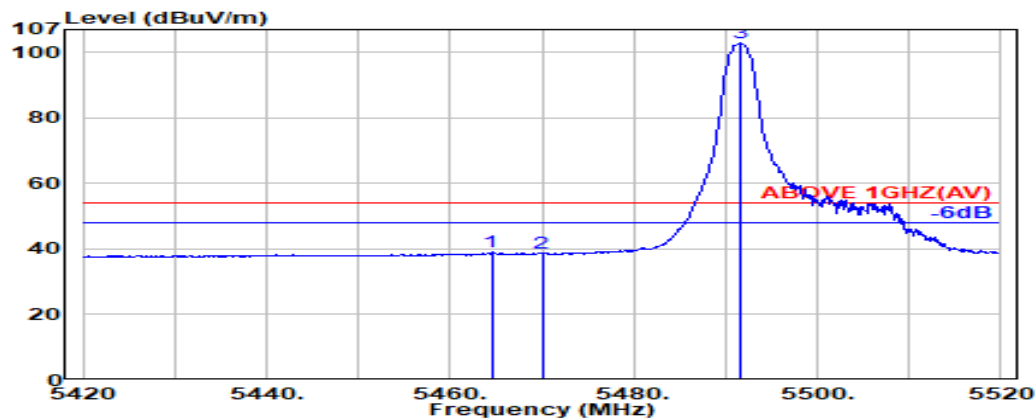

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.17	8.73	34.18	30.27	38.99	54.00	15.01	Average
5470.000	34.16	8.74	34.18	29.96	38.67	54.00	15.33	Average
@ 5491.600	34.12	8.75	34.17	94.12	102.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

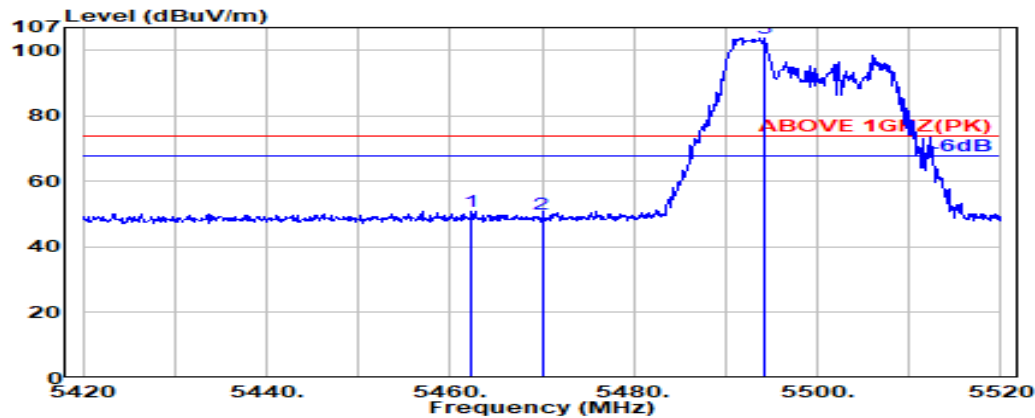

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.18	8.73	34.18	42.35	51.08	74.00	22.92	Peak
5470.000	34.16	8.74	34.18	41.21	49.92	74.00	24.08	Peak
@ 5494.200	34.11	8.75	34.17	95.15	103.84	---	---	Peak

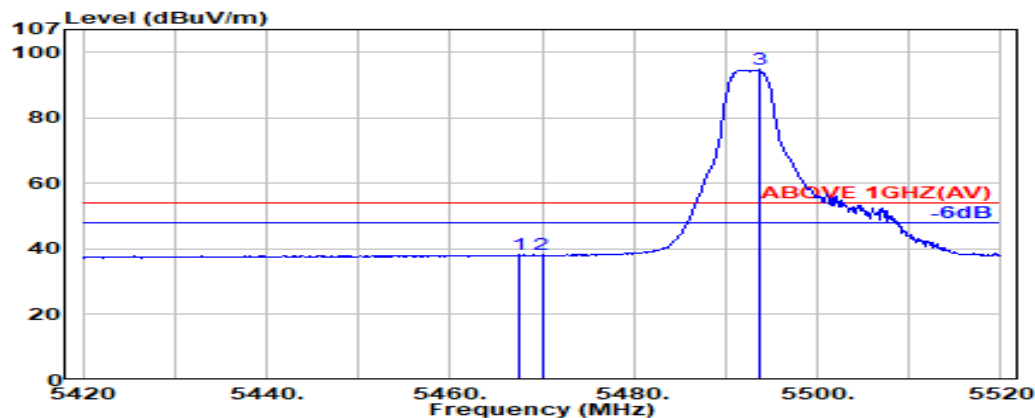

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.18	29.54	38.26	54.00	15.74	Average
5470.000	34.16	8.74	34.18	29.48	38.19	54.00	15.81	Average
@ 5493.700	34.11	8.75	34.17	86.01	94.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

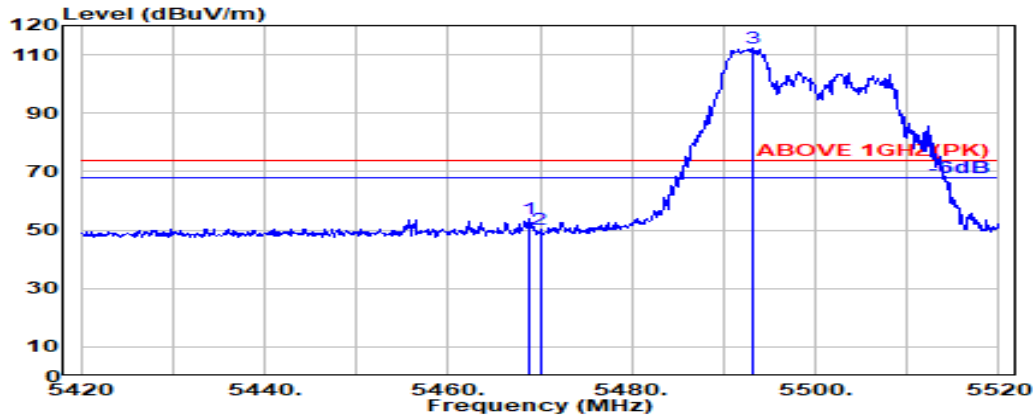

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	44.99	53.70	74.00	20.30	Peak
5470.000	34.16	8.74	34.18	41.47	50.18	74.00	23.82	Peak
@ 5493.100	34.11	8.75	34.17	103.83	112.52	---	---	Peak

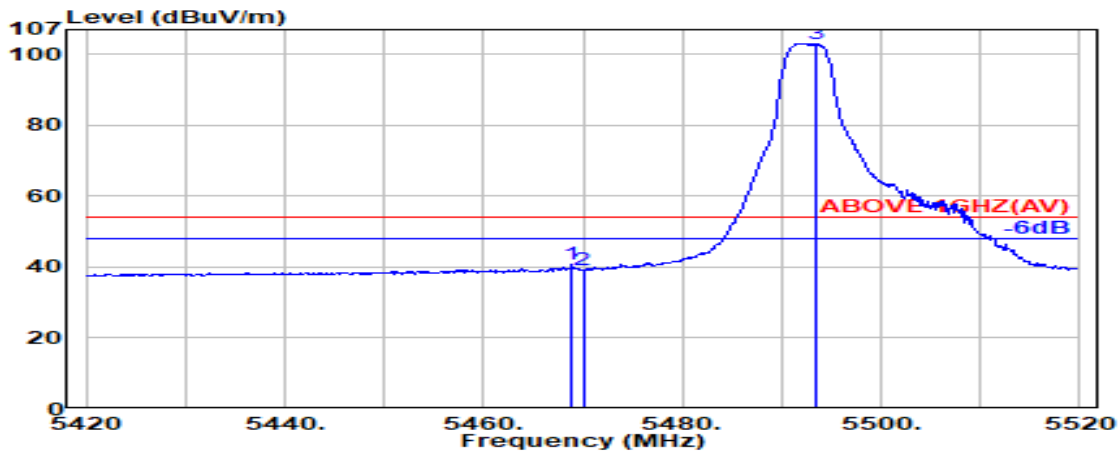

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	32.01	40.72	54.00	13.28	Average
5470.000	34.16	8.74	34.18	30.61	39.33	54.00	14.67	Average
@ 5493.400	34.11	8.75	34.17	94.38	103.07	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

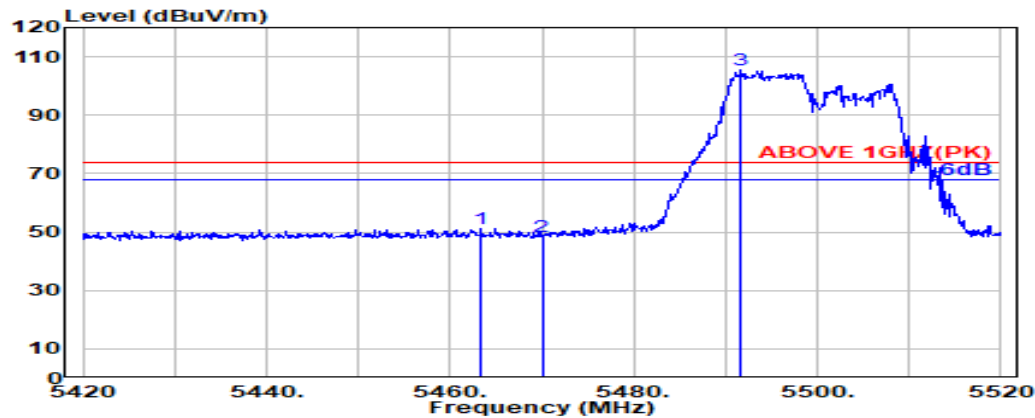

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.17	8.73	34.18	42.37	51.10	74.00	22.90	Peak
5470.000	34.16	8.74	34.18	39.67	48.39	74.00	25.61	Peak
@ 5491.700	34.12	8.75	34.17	96.76	105.45	---	---	Peak

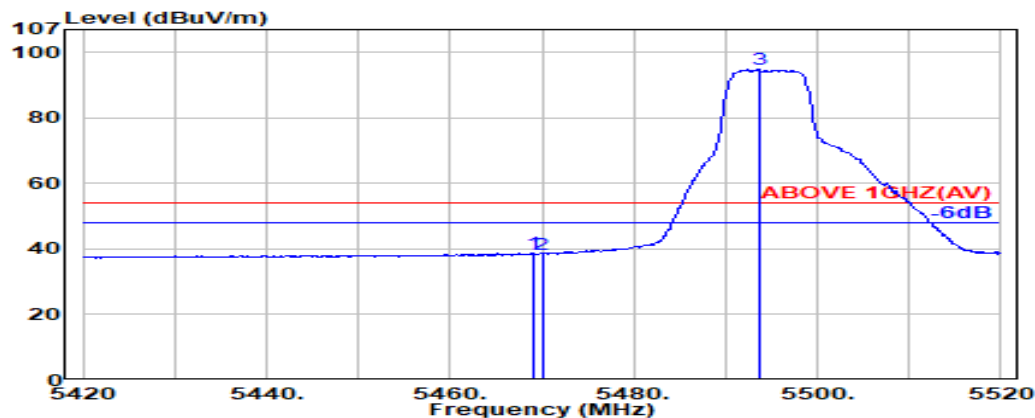

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	29.96	38.68	54.00	15.32	Average
5470.000	34.16	8.74	34.18	29.84	38.55	54.00	15.45	Average
@ 5493.600	34.11	8.75	34.17	86.21	94.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

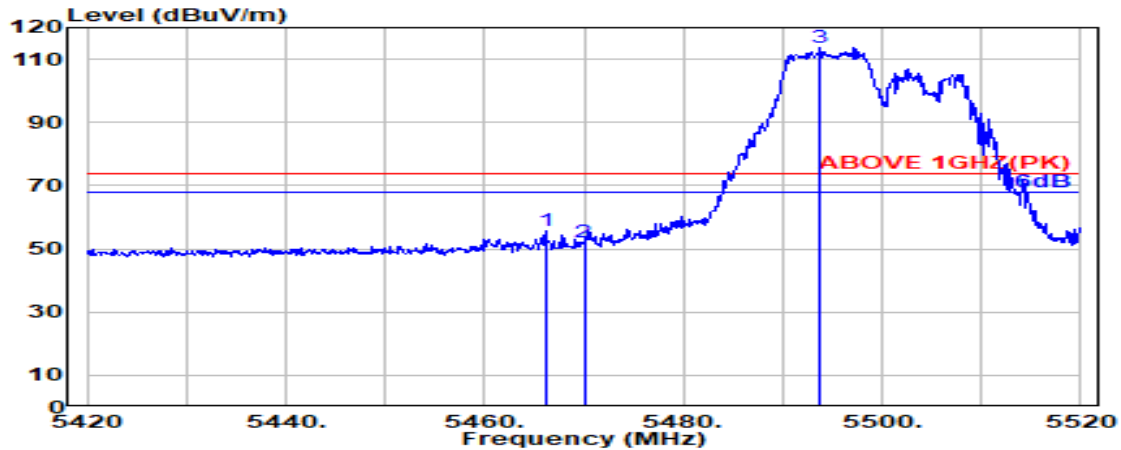

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	8.73	34.18	46.76	55.48	74.00	18.52	Peak
5470.000	34.16	8.74	34.18	43.41	52.13	74.00	21.87	Peak
@ 5493.800	34.11	8.75	34.17	104.88	113.57	---	---	Peak

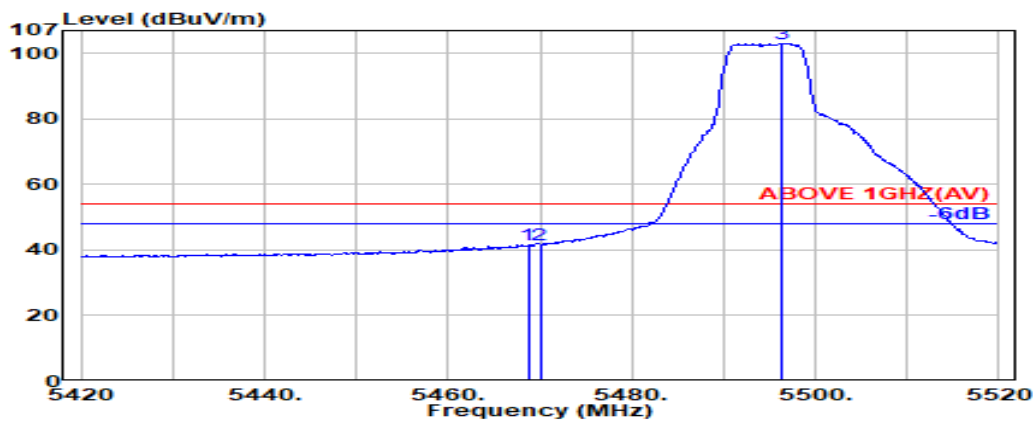

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	32.80	41.52	54.00	12.48	Average
5470.000	34.16	8.74	34.18	33.03	41.74	54.00	12.26	Average
@ 5496.300	34.11	8.75	34.17	94.42	103.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

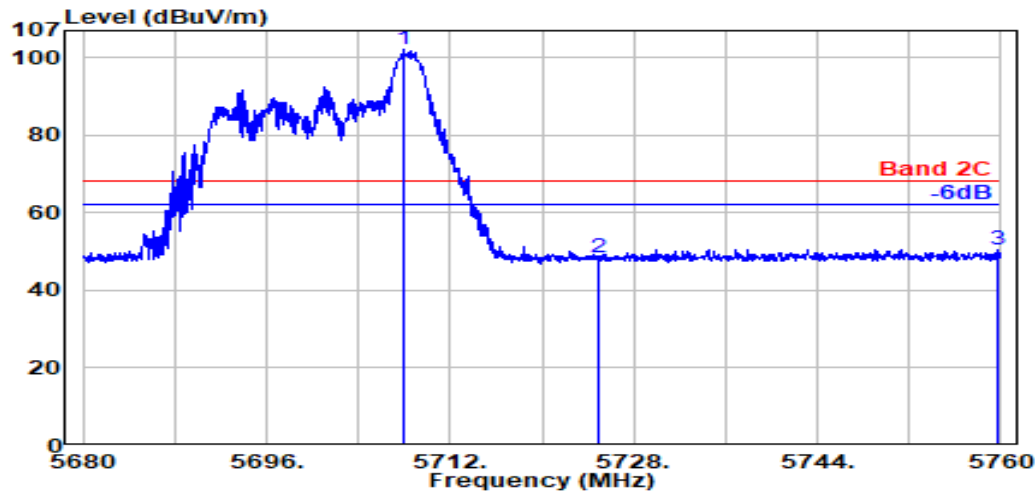

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	33.80	8.87	34.27	93.77	102.17	---	---	Peak
5725.000	33.80	8.88	34.28	40.08	48.48	68.20	19.72	Peak
5759.800	33.84	8.90	34.29	42.11	50.56	68.20	17.64	Peak

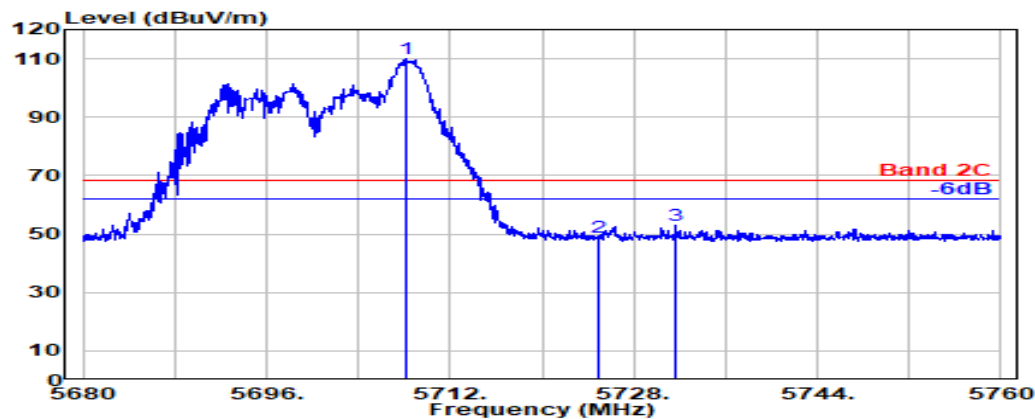

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.150	33.80	8.87	34.27	101.51	109.92	---	---	Peak
5725.000	33.80	8.88	34.28	40.39	48.80	68.20	19.40	Peak
5731.650	33.80	8.88	34.28	44.40	52.81	68.20	15.39	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

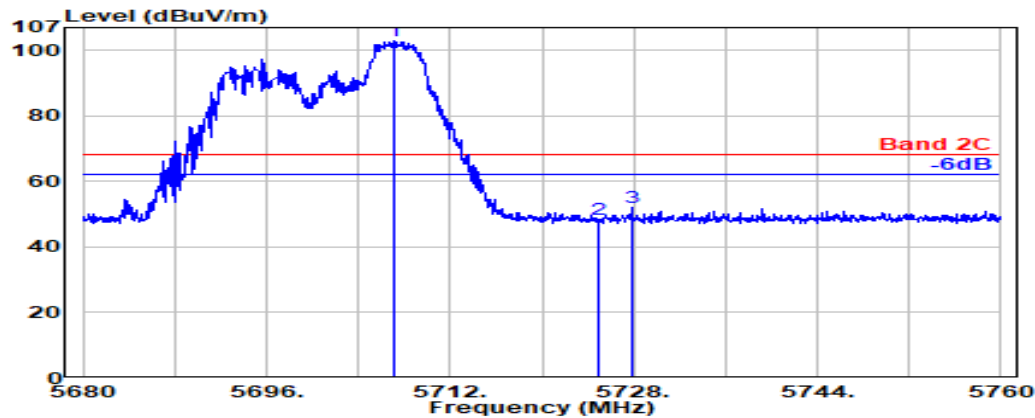

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.050	33.80	8.87	34.27	94.49	102.89	---	---	Peak
5725.000	33.80	8.88	34.28	40.12	48.52	68.20	19.68	Peak
5727.850	33.80	8.88	34.28	43.73	52.14	68.20	16.06	Peak

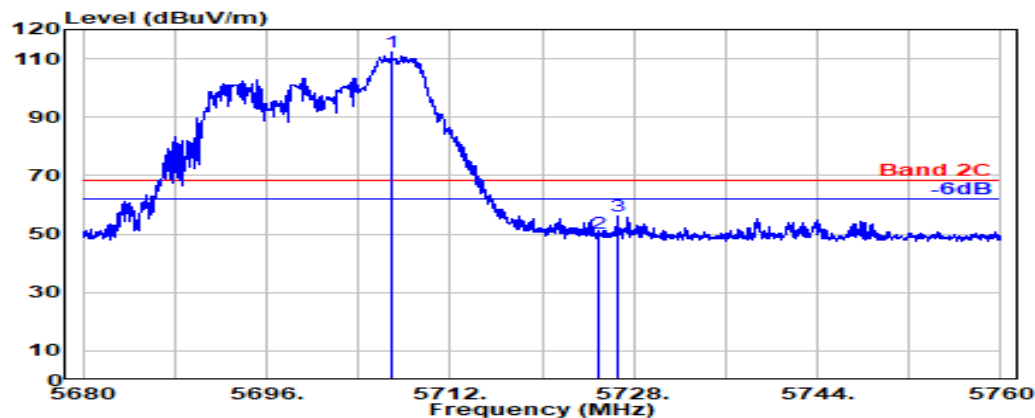

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.900	33.80	8.87	34.27	103.68	112.08	--	---	Peak
5725.000	33.80	8.88	34.28	41.68	50.09	68.20	18.11	Peak
5726.650	33.80	8.88	34.28	47.78	56.18	68.20	12.02	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

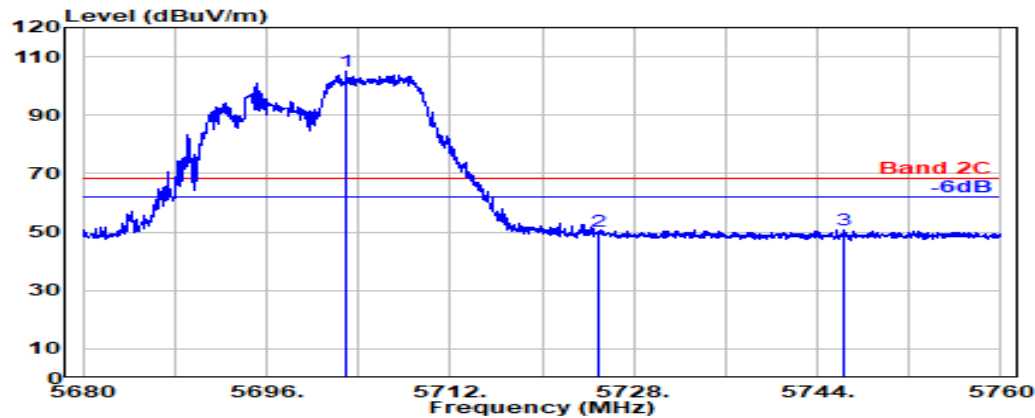

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.950	33.80	8.87	34.27	96.59	104.99	---	---	Peak
5725.000	33.80	8.88	34.28	42.00	50.40	68.20	17.80	Peak
5746.250	33.80	8.89	34.29	42.27	50.68	68.20	17.52	Peak

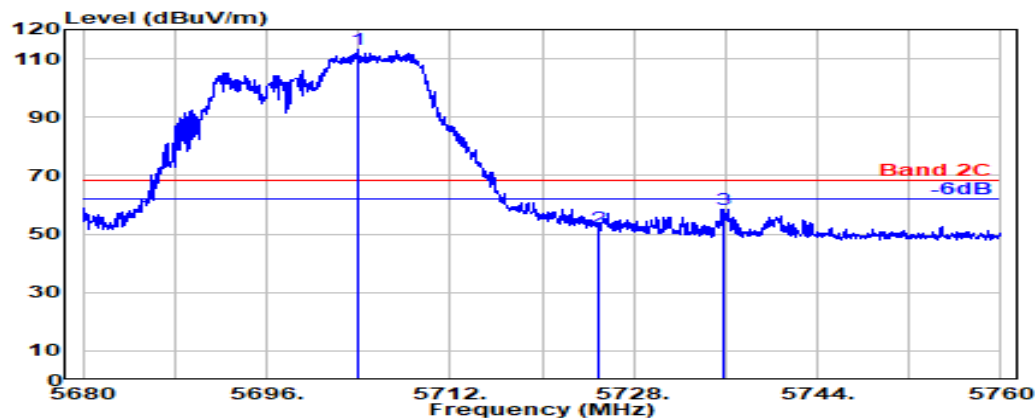

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.900	33.80	8.87	34.27	104.87	113.27	---	---	Peak
5725.000	33.80	8.88	34.28	43.61	52.02	68.20	16.18	Peak
5735.750	33.80	8.89	34.28	50.12	58.52	68.20	9.68	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

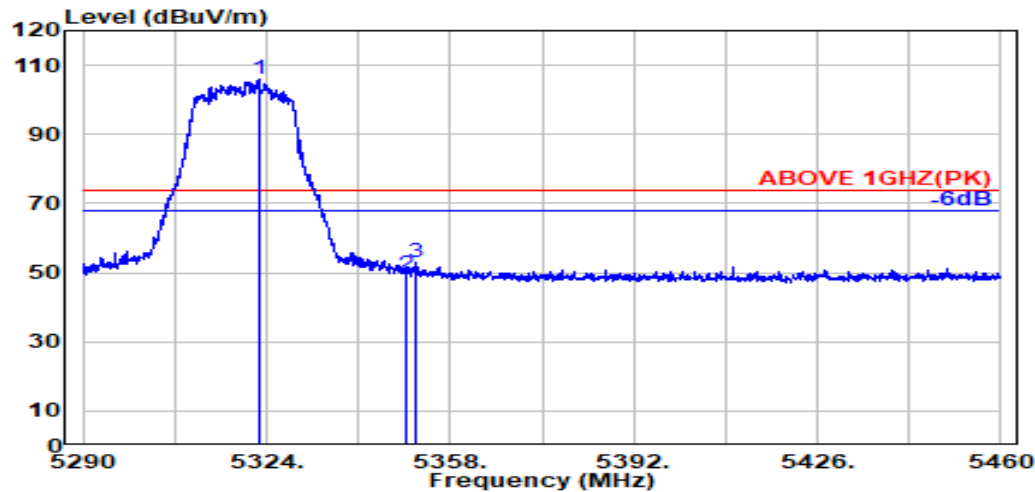

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.500	34.01	8.65	34.23	97.44	105.88	---	---	Peak
5350.000	33.90	8.67	34.22	41.11	49.46	74.00	24.54	Peak
5351.800	33.91	8.67	34.22	44.51	52.86	74.00	21.14	Peak

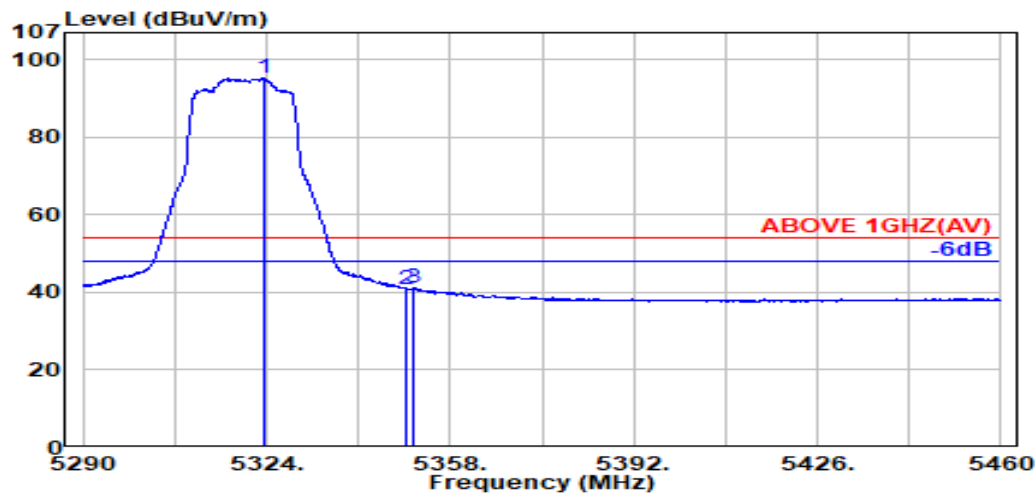

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	34.01	8.65	34.22	86.72	95.15	---	---	Average
5350.000	33.90	8.67	34.22	32.46	40.81	54.00	13.19	Average
5351.300	33.91	8.67	34.22	32.66	41.01	54.00	12.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

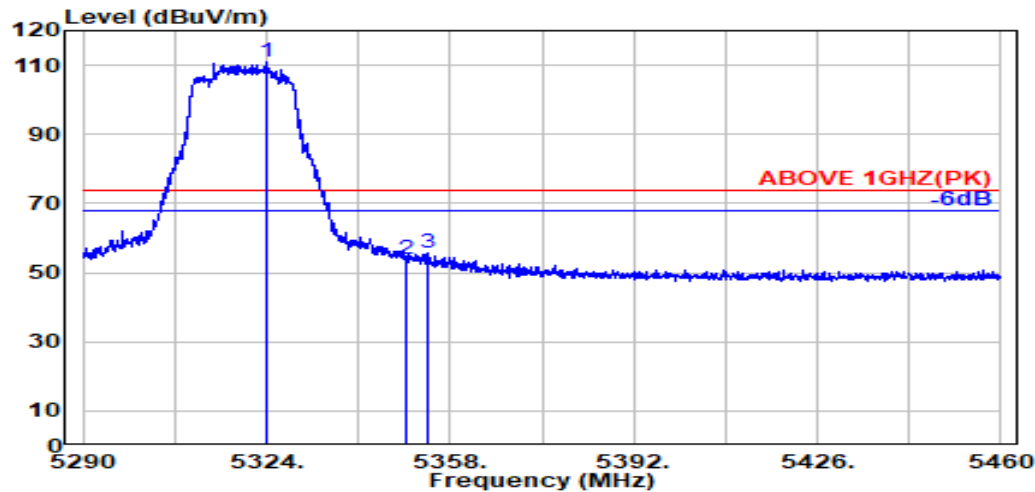

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.00	8.65	34.22	102.58	111.00	---	---	Peak
5350.000	33.90	8.67	34.22	45.64	53.99	74.00	20.01	Peak
5353.700	33.91	8.67	34.22	47.18	55.55	74.00	18.45	Peak

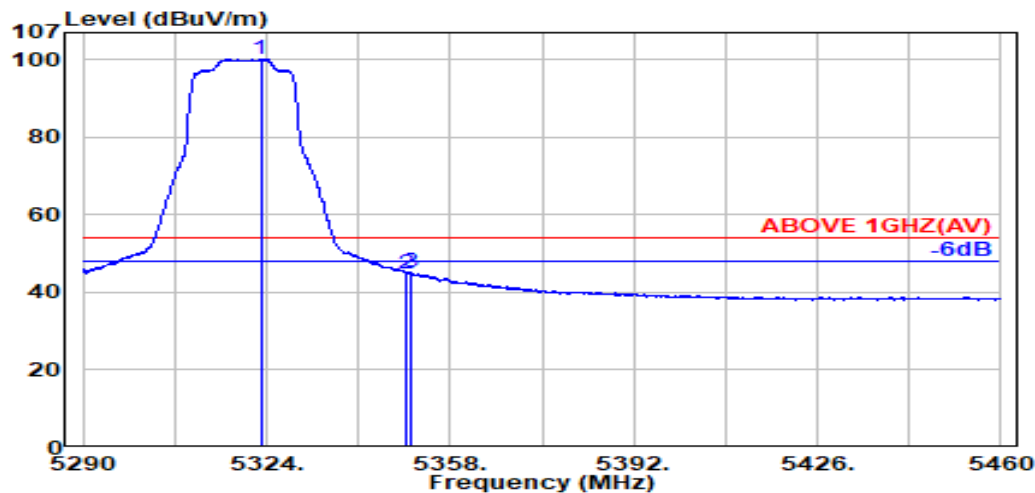

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	34.01	8.65	34.22	91.74	100.17	---	---	Average
5350.000	33.90	8.67	34.22	36.61	44.96	54.00	9.04	Average
5350.600	33.90	8.67	34.22	36.71	45.06	54.00	8.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

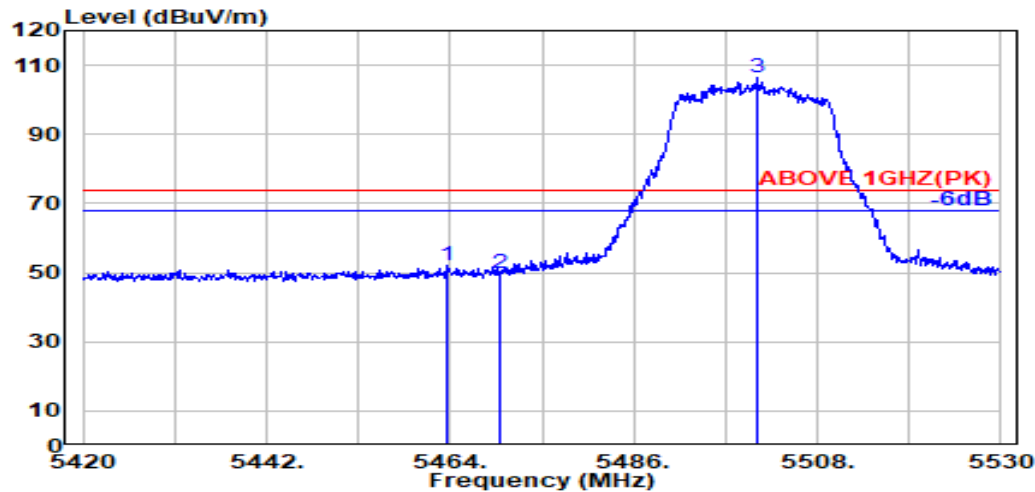

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.700	34.17	8.73	34.18	43.20	51.92	74.00	22.08	Peak
5470.000	34.16	8.74	34.18	41.05	49.76	74.00	24.24	Peak
@ 5500.800	34.10	8.75	34.17	97.61	106.30	---	---	Peak

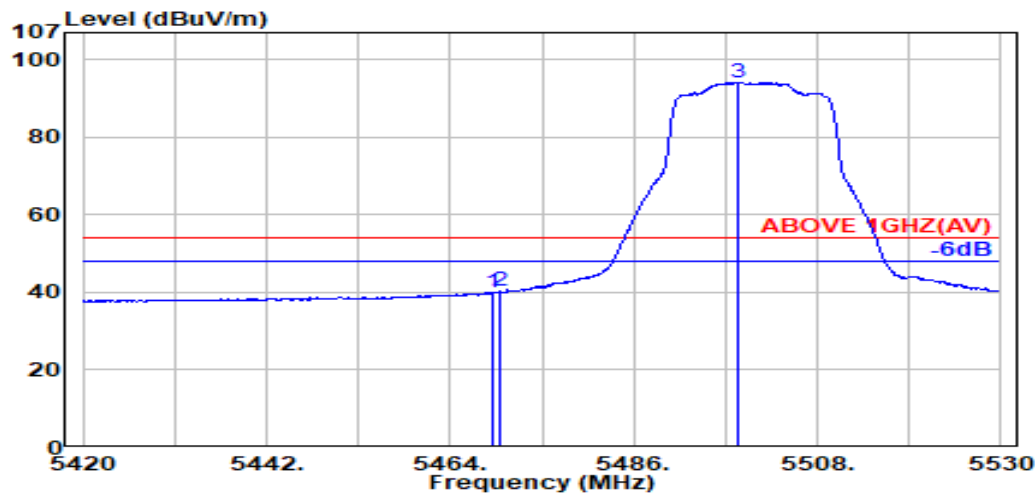

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	31.14	39.86	54.00	14.14	Average
5470.000	34.16	8.74	34.18	31.62	40.33	54.00	13.67	Average
@ 5498.400	34.10	8.75	34.17	85.48	94.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

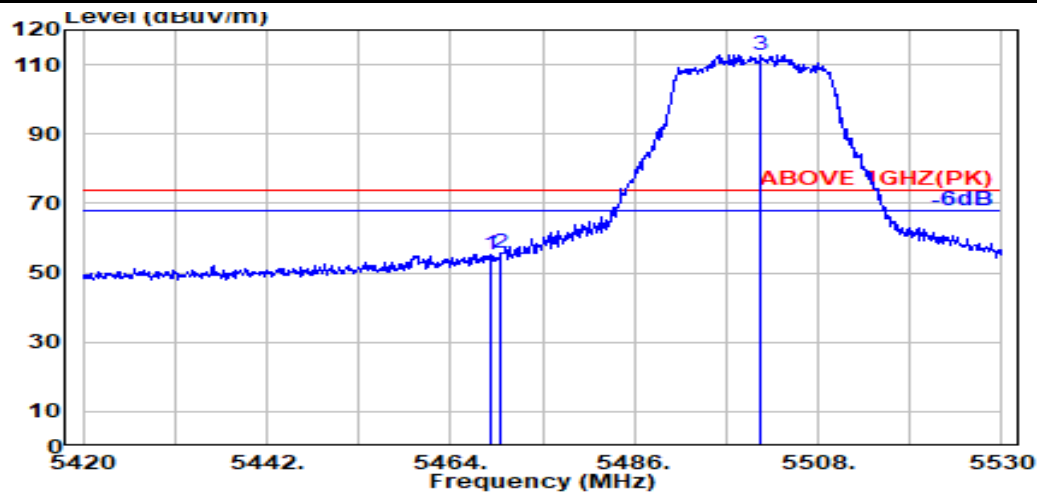

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	46.68	55.39	74.00	18.61	Peak
5470.000	34.16	8.74	34.18	47.07	55.78	74.00	18.22	Peak
@ 5501.100	34.10	8.75	34.17	104.21	112.89	---	---	Peak

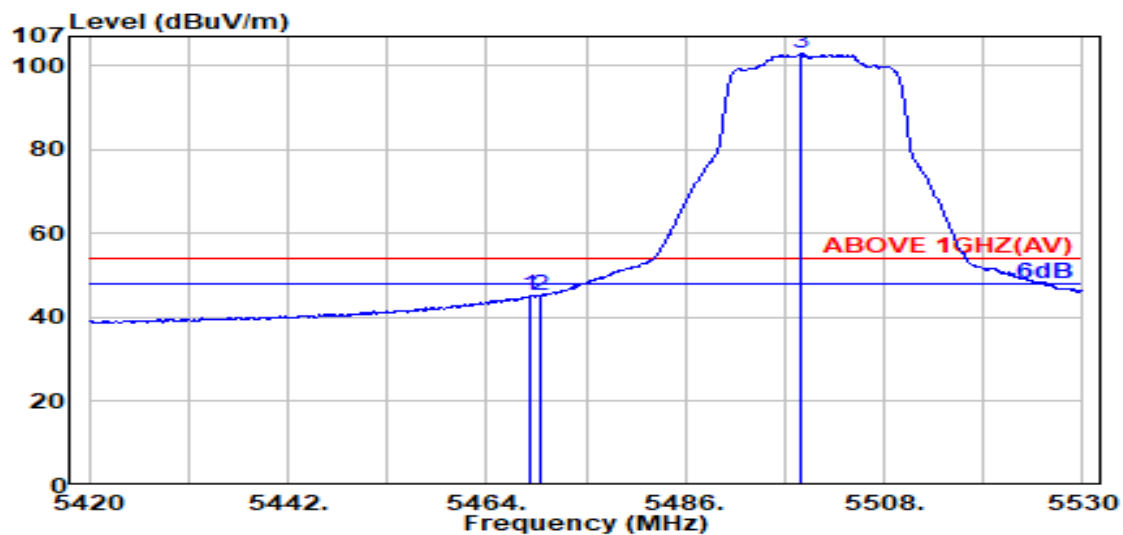

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	36.66	45.38	54.00	8.62	Average
5470.000	34.16	8.74	34.18	36.41	45.13	54.00	8.87	Average
@ 5498.700	34.10	8.75	34.17	94.17	102.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

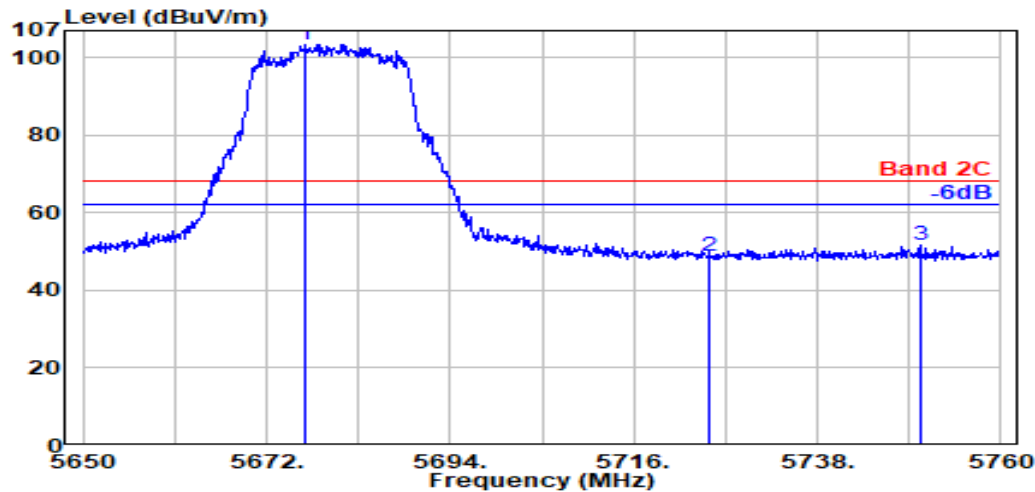

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.600	33.89	8.85	34.25	95.00	103.49	---	---	Peak
5725.000	33.80	8.88	34.28	40.45	48.85	68.20	19.35	Peak
5750.300	33.80	8.89	34.29	43.16	51.57	68.20	16.63	Peak

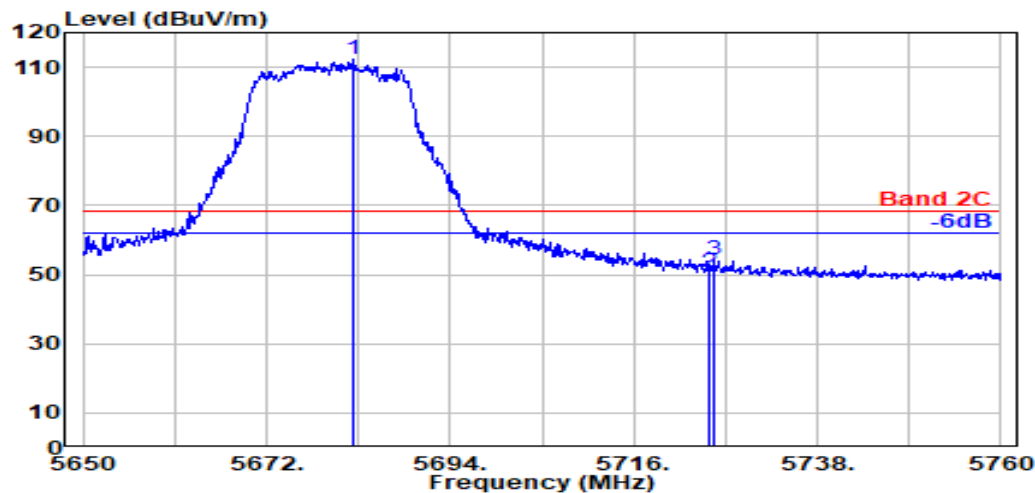

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.400	33.87	8.86	34.26	103.79	112.27	---	---	Peak
5725.000	33.80	8.88	34.28	42.23	50.64	68.20	17.56	Peak
5725.600	33.80	8.88	34.28	45.84	54.24	68.20	13.96	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.