


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 70         |
| Mode  | 802.11be-EHT40 | U-NII Band | 5          |
|       |                | Frequency  | TX 5965MHz |

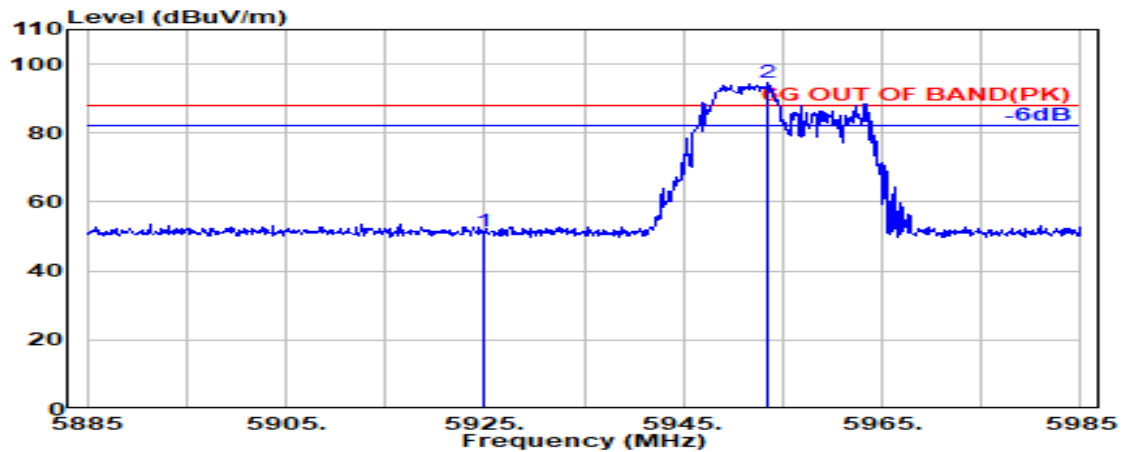

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.57             | 51.40                   | 88.20           | 36.80       | Peak     |
| @ 5953.500               | 34.29                 | 9.01            | 34.38                  | 85.71             | 94.63                   | ---             | ---         | Peak     |

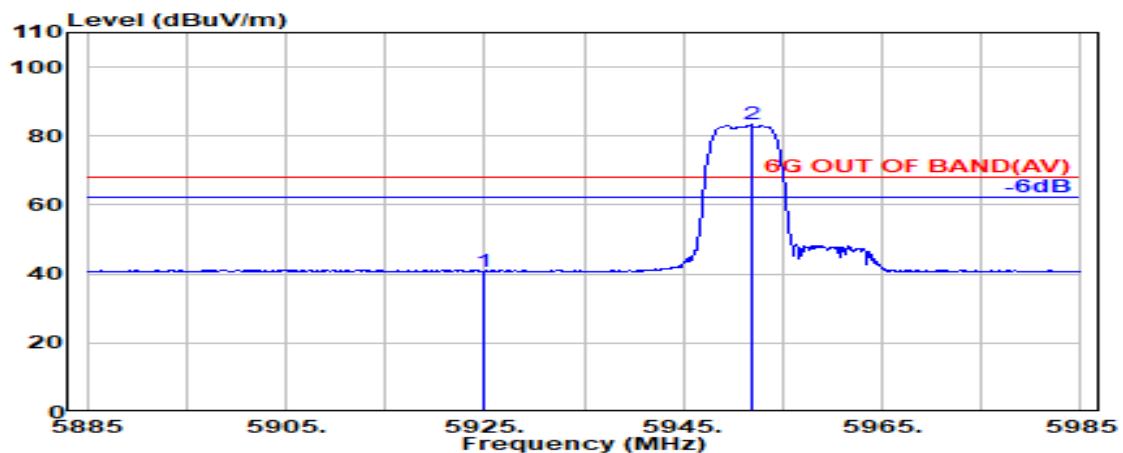

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 31.97             | 40.79                   | 68.20           | 27.41       | Average  |
| @ 5951.900               | 34.30                 | 9.00            | 34.38                  | 74.38             | 83.30                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 75         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

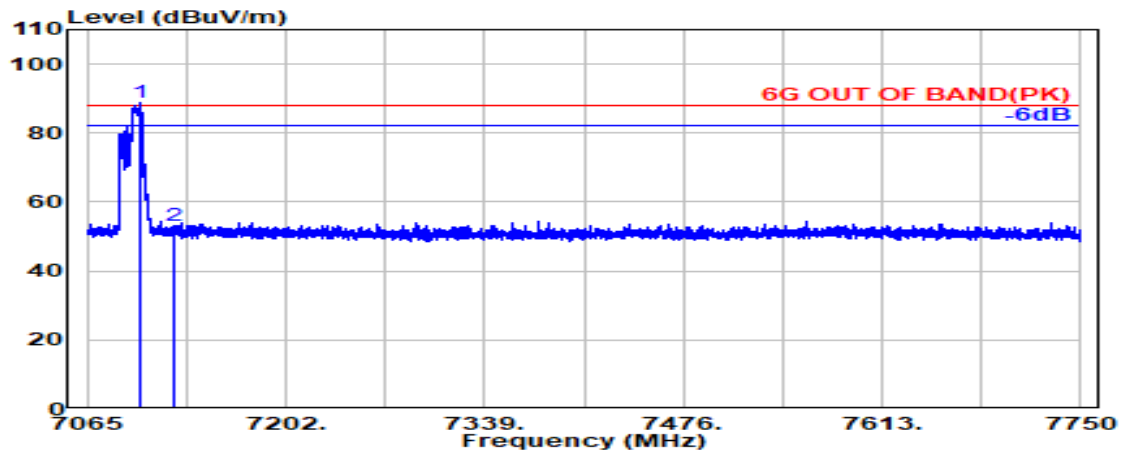

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7102.100               | 35.81                 | 9.79            | 34.47                  | 77.63             | 88.75                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 41.76             | 52.97                   | 88.20           | 35.23       | Peak     |

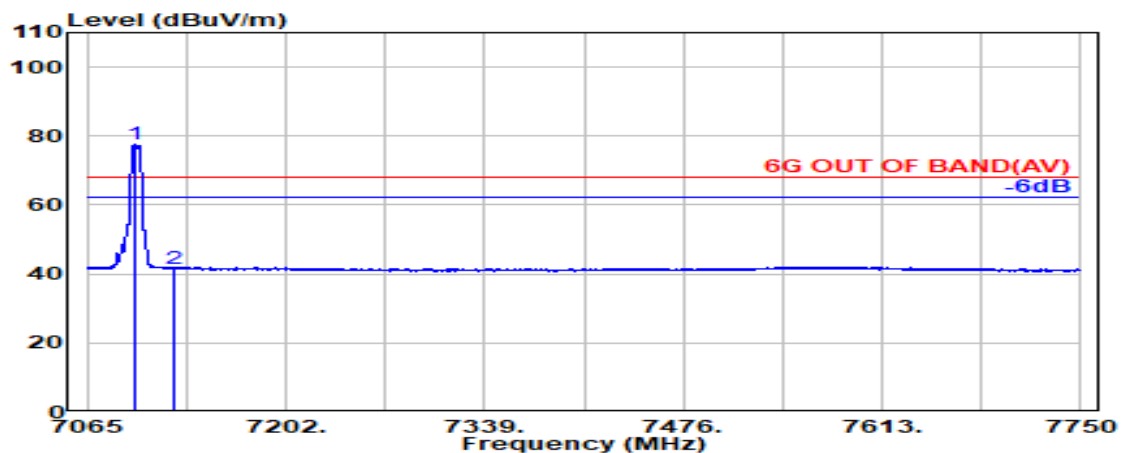

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7098.600               | 35.79                 | 9.78            | 34.47                  | 66.61             | 77.71                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.39             | 41.61                   | 68.20           | 26.59       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+52T        | RU Index   | 75         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

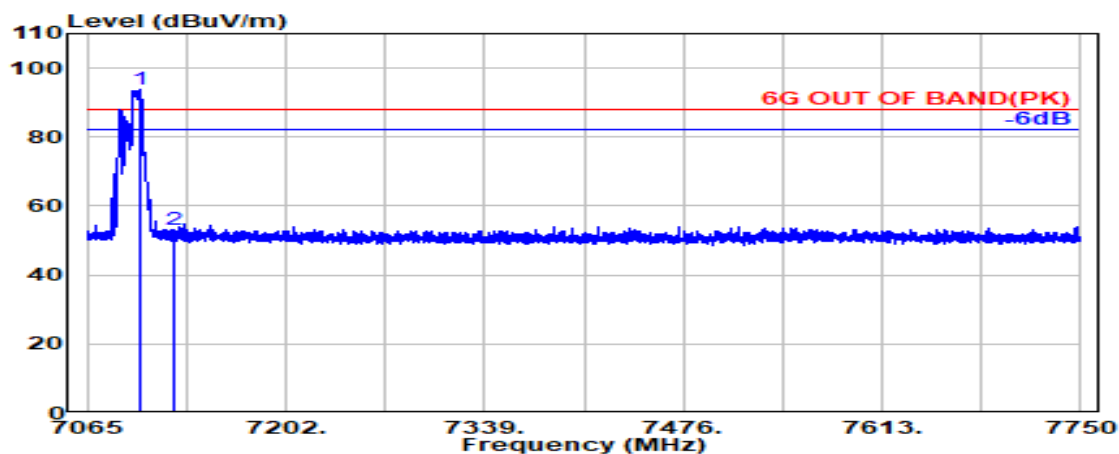

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7100.900               | 35.80                 | 9.79            | 34.47            | 82.61             | 93.72                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 41.76             | 52.97                   | 88.20           | 35.23       | Peak     |

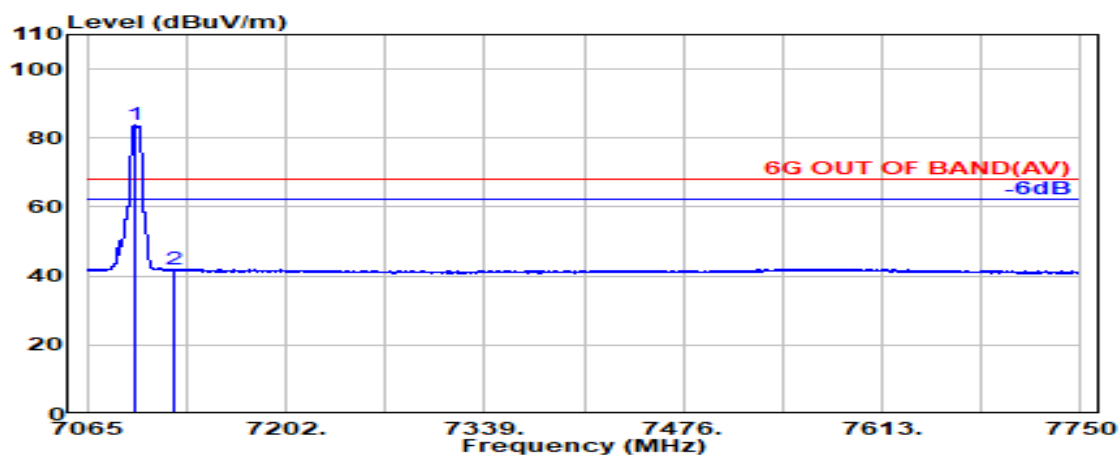

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7097.500               | 35.79                 | 9.78            | 34.47            | 72.88             | 83.99                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 30.52             | 41.73                   | 68.20           | 26.47       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 82         |
| Mode  | 802.11be-EHT20 | U-NII Band | 5          |
|       |                | Frequency  | TX 5955MHz |

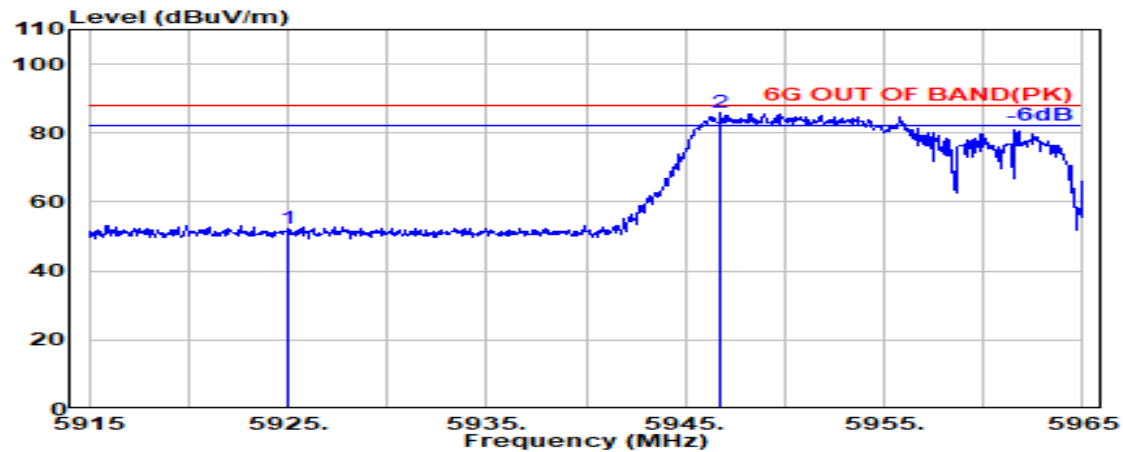

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.32             | 52.14                   | 88.20           | 36.06       | Peak     |
| @ 5946.750               | 34.29                 | 9.00            | 34.38                  | 76.93             | 85.85                   | ---             | ---         | Peak     |

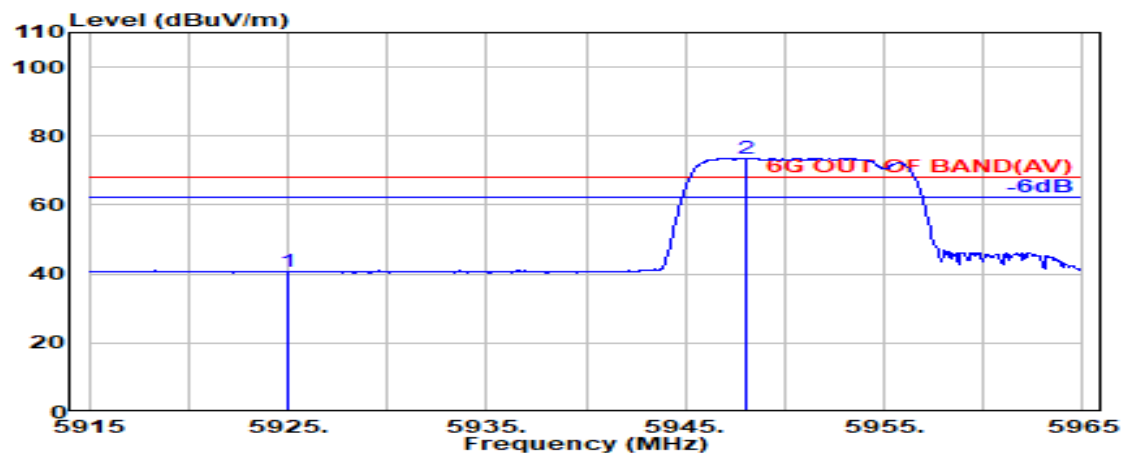

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 31.82             | 40.64                   | 68.20           | 27.56       | Average  |
| @ 5948.100               | 34.29                 | 9.00            | 34.38                  | 64.69             | 73.61                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 82         |
| Mode  | 802.11be-EHT20 | U-NII Band | 5          |
|       |                | Frequency  | TX 5955MHz |

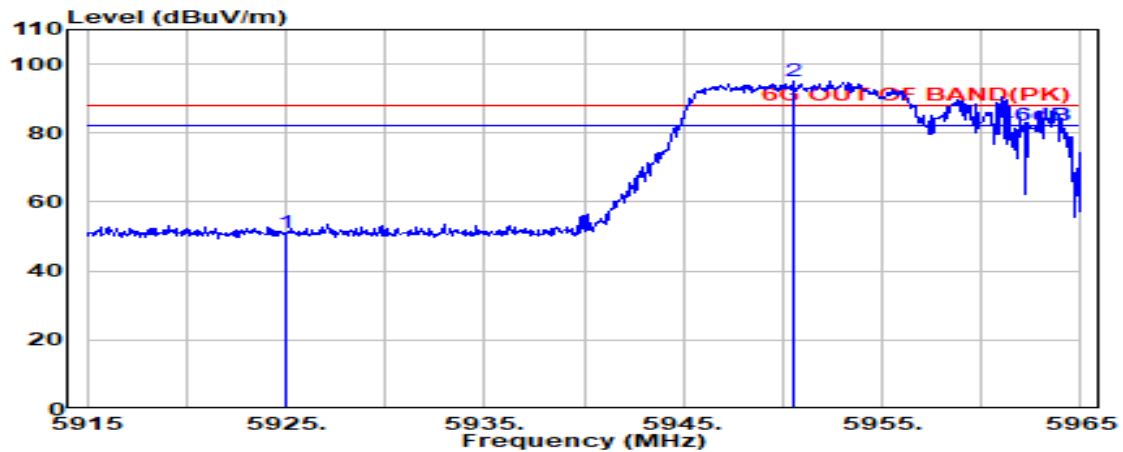

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 42.15             | 50.97                   | 88.20           | 37.23       | Peak     |
| @ 5950.500               | 34.30                 | 9.00            | 34.38                  | 86.21             | 95.13                   | ---             | ---         | Peak     |

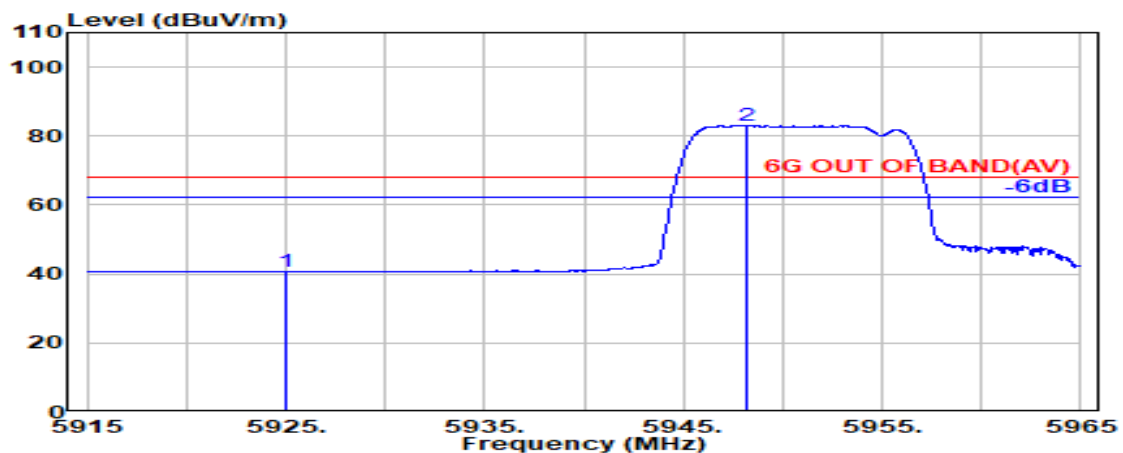

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 31.87             | 40.69                   | 68.20           | 27.51       | Average  |
| @ 5948.150               | 34.29                 | 9.00            | 34.38                  | 74.16             | 83.08                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 85         |
| Mode  | 802.11be-EHT40 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

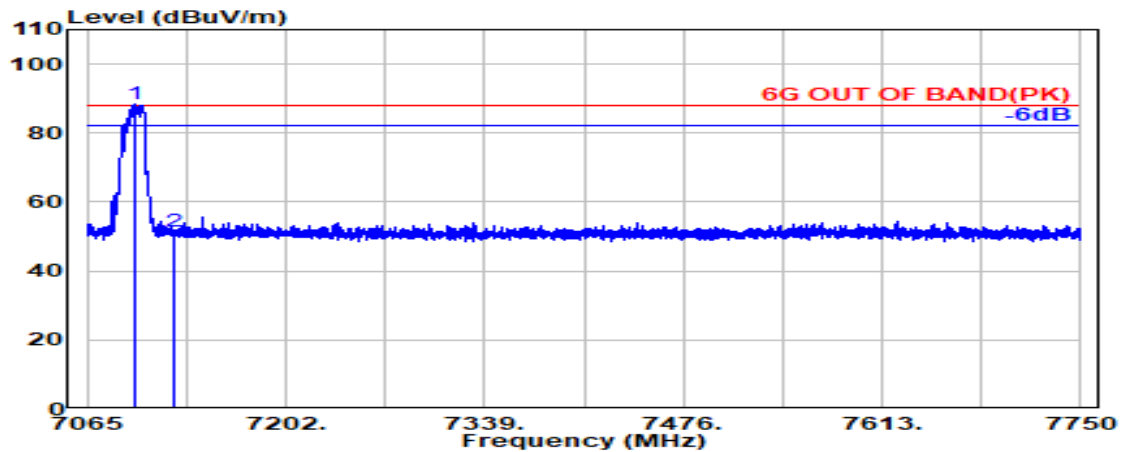

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7098.000               | 35.79                 | 9.78            | 34.47                  | 77.17             | 88.28                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 40.31             | 51.52                   | 88.20           | 36.68       | Peak     |

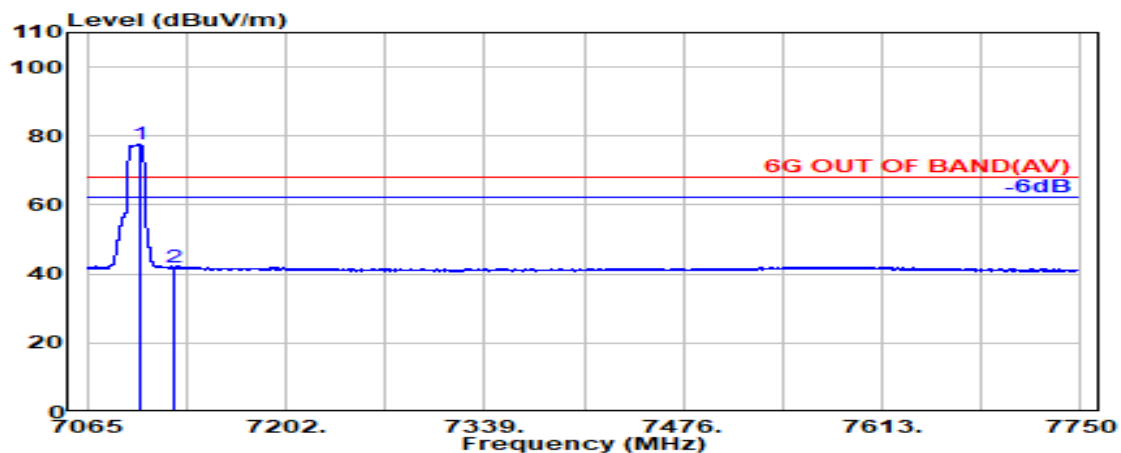

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7100.800               | 35.80                 | 9.79            | 34.47                  | 66.37             | 77.49                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.71             | 41.92                   | 68.20           | 26.28       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 26T+106T       | RU Index   | 85         |
| Mode  | 802.11be-EHT20 | U-NII Band | 8          |
|       |                | Frequency  | TX 7085MHz |

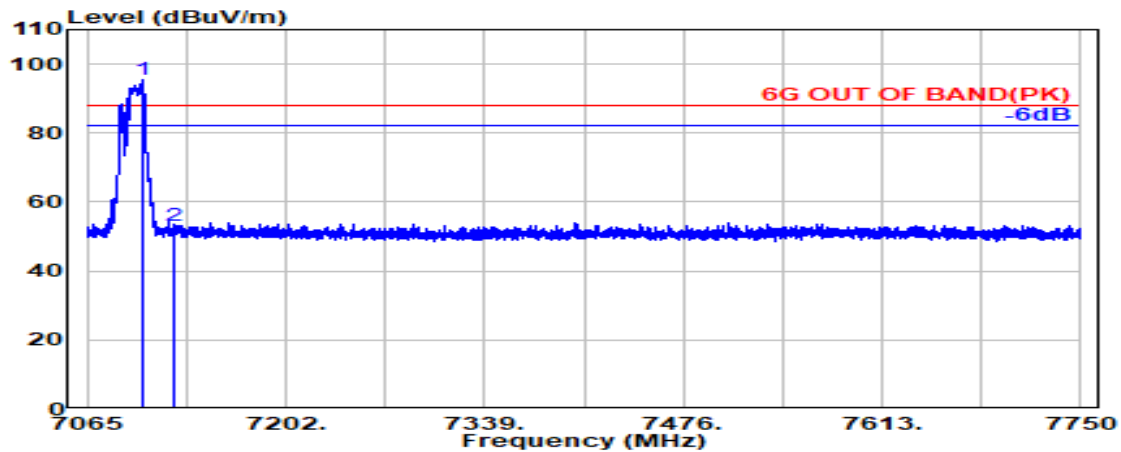

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7103.000               | 35.81                 | 9.79            | 34.47                  | 84.39             | 95.52                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 42.01             | 53.22                   | 88.20           | 34.98       | Peak     |

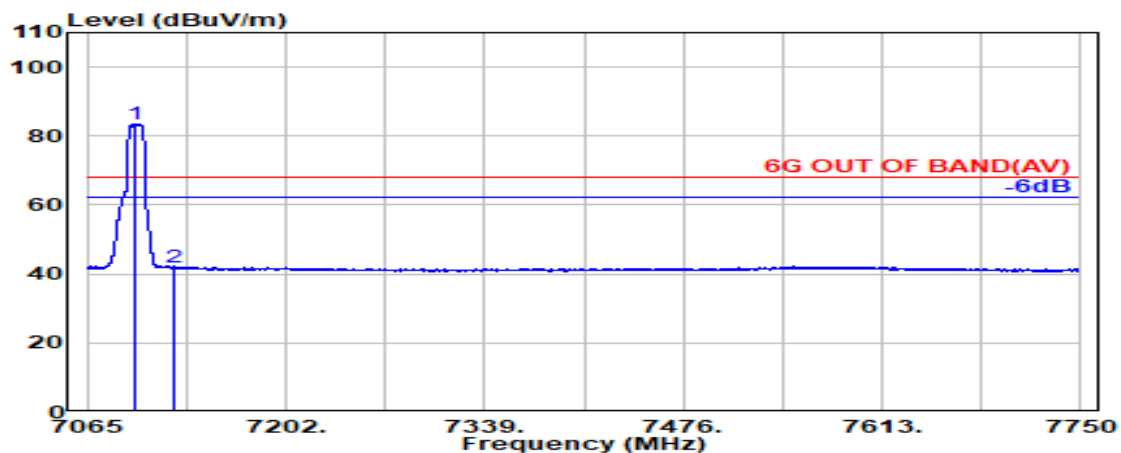

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7097.700               | 35.79                 | 9.78            | 34.47                  | 72.34             | 83.44                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.64             | 41.85                   | 68.20           | 26.35       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 92         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

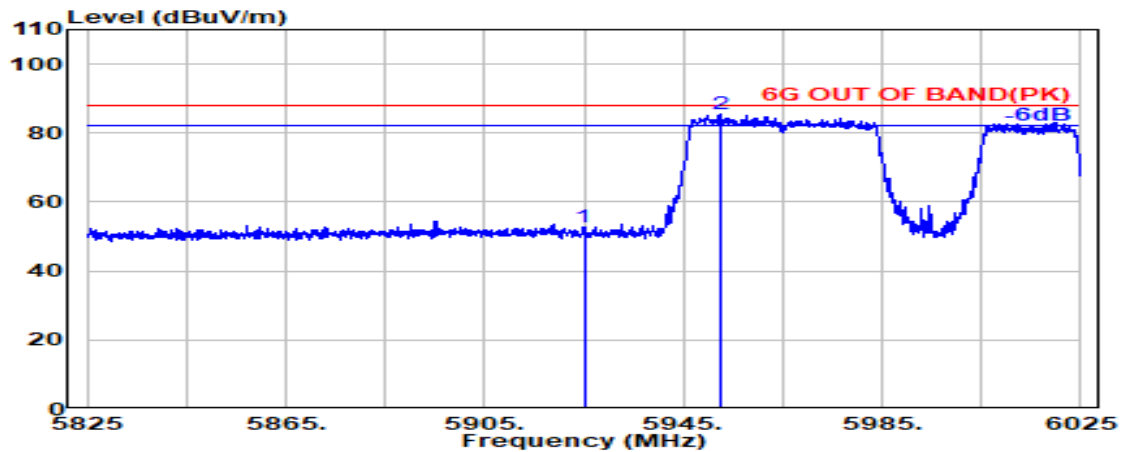

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.83             | 52.66                   | 88.20           | 35.54       | Peak     |
| @ 5952.300               | 34.30                 | 9.00            | 34.38                  | 76.51             | 85.43                   | ---             | ---         | Peak     |

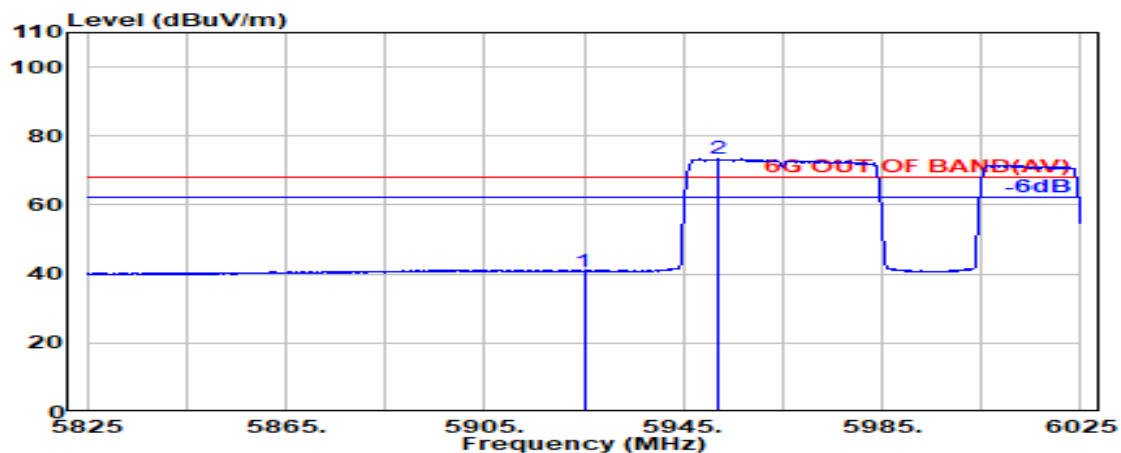


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 32.05             | 40.87                   | 68.20           | 27.33       | Average  |
| @ 5951.900               | 34.30                 | 9.00            | 34.38                  | 64.41             | 73.33                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 92         |
| Mode  | 802.11be-EHT80 | U-NII Band | 5          |
|       |                | Frequency  | TX 5985MHz |

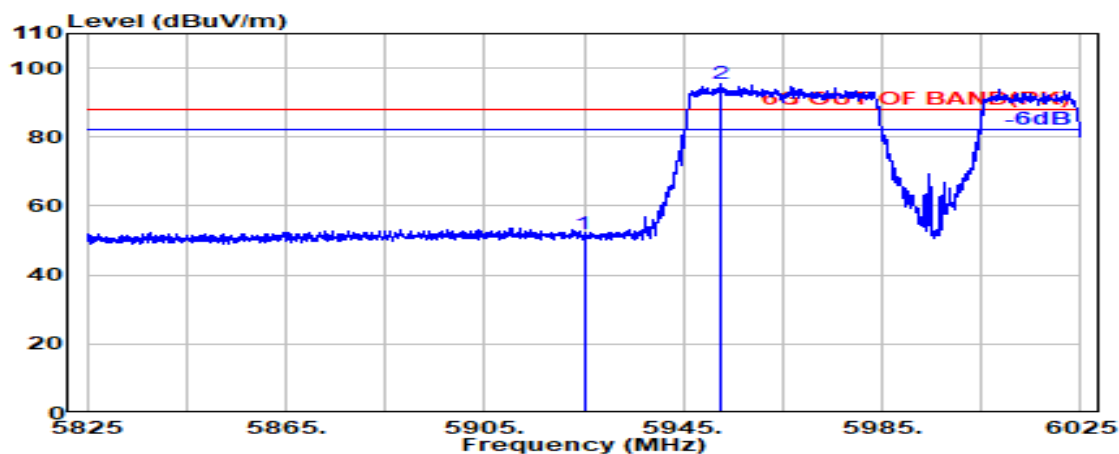

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.12             | 51.94                   | 88.20           | 36.26       | Peak     |
| @ 5952.400               | 34.30                 | 9.00            | 34.38                  | 86.35             | 95.27                   | ---             | ---         | Peak     |

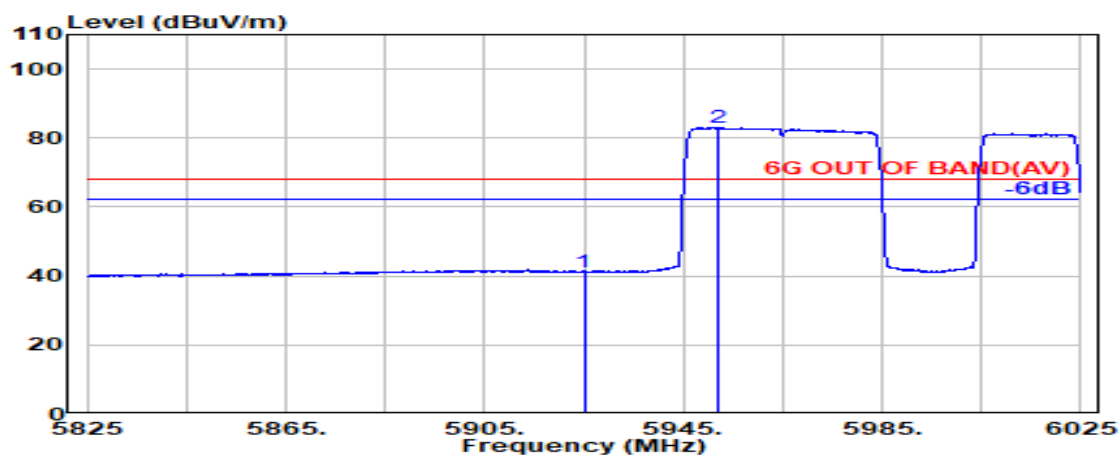

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 32.38             | 41.20                   | 68.20           | 27.00       | Average  |
| @ 5951.900               | 34.30                 | 9.00            | 34.38                  | 74.09             | 83.01                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 90         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

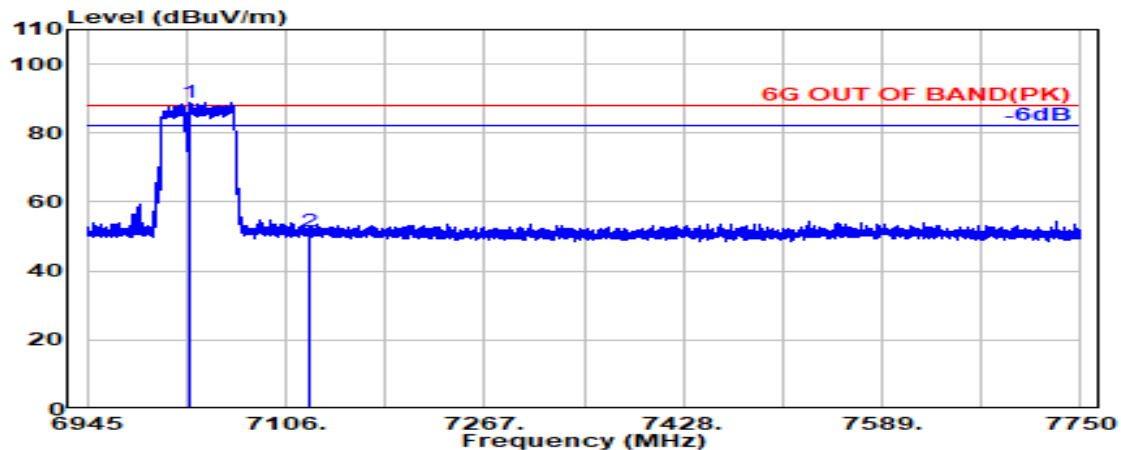

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7028.600               | 35.56                 | 9.74            | 34.42                  | 77.82             | 88.69                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 40.10             | 51.32                   | 88.20           | 36.88       | Peak     |

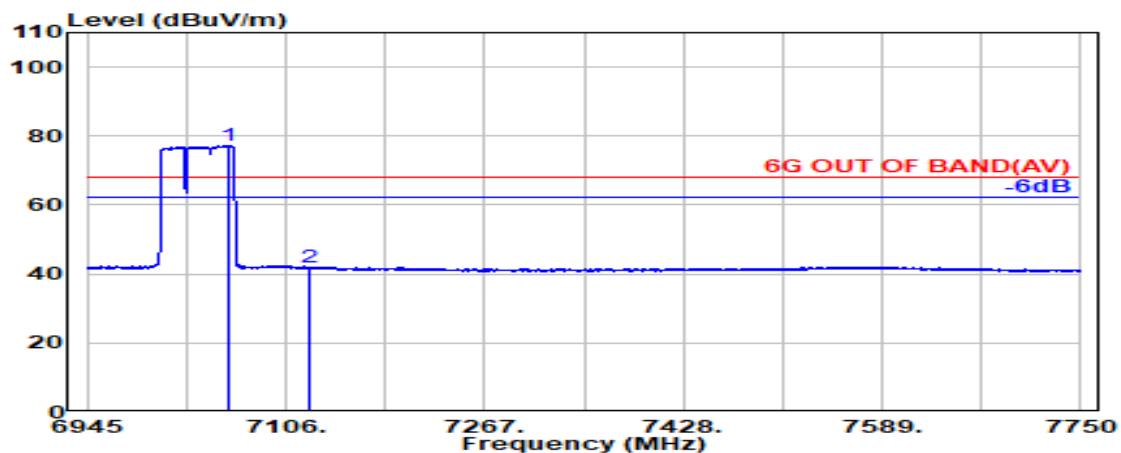

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7060.200               | 35.64                 | 9.76            | 34.44                  | 66.24             | 77.19                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.57             | 41.78                   | 68.20           | 26.42       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                |            |            |
|-------|----------------|------------|------------|
| Tones | 484T+242T      | RU Index   | 90         |
| Mode  | 802.11be-EHT80 | U-NII Band | 8          |
|       |                | Frequency  | TX 7025MHz |

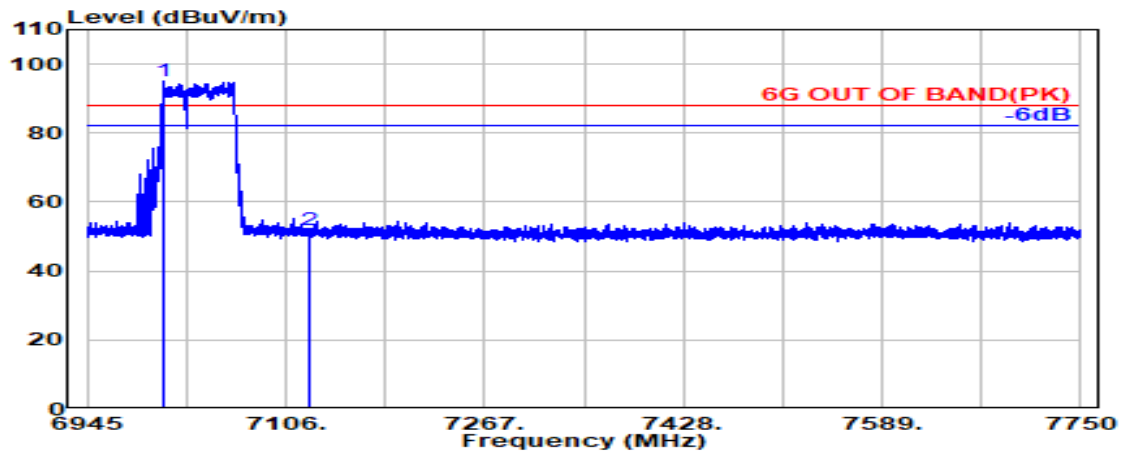

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7006.700               | 35.51                 | 9.72            | 34.40            | 84.10             | 94.93                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 40.80             | 52.01                   | 88.20           | 36.19       | Peak     |

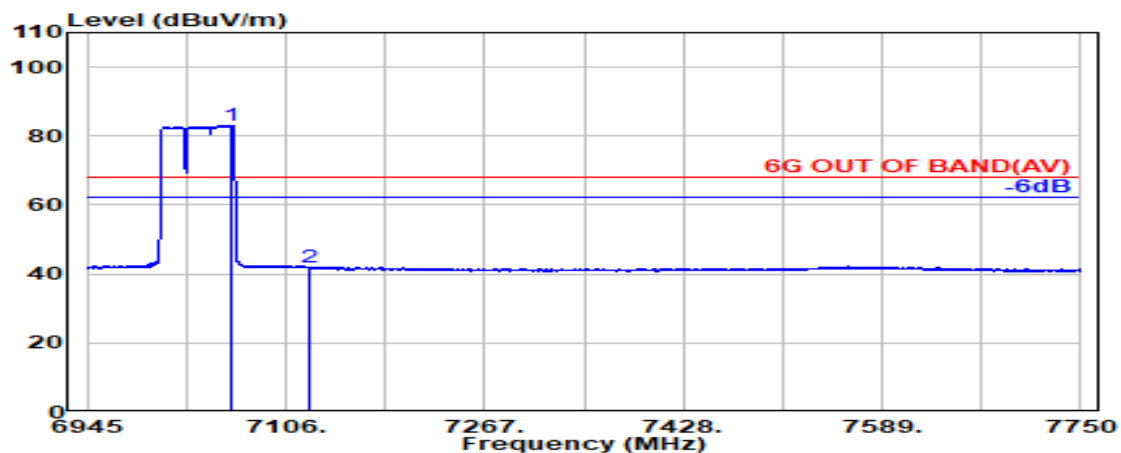

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.700               | 35.65                 | 9.76            | 34.44            | 72.09             | 83.05                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 30.54             | 41.75                   | 68.20           | 26.45       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 95         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

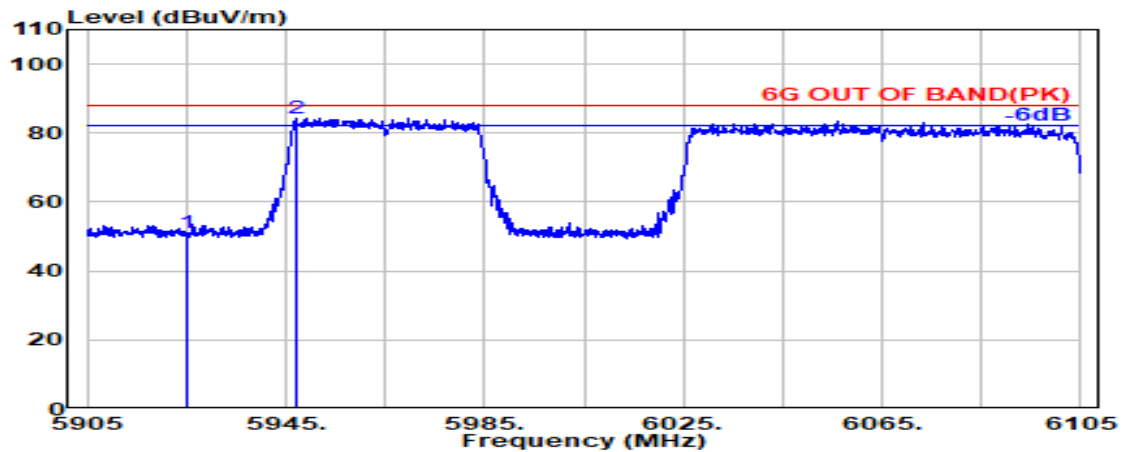

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 42.03             | 50.86                   | 88.20           | 37.34       | Peak     |
| @ 5947.200               | 34.29                 | 9.00            | 34.38            | 75.39             | 84.30                   | ---             | ---         | Peak     |

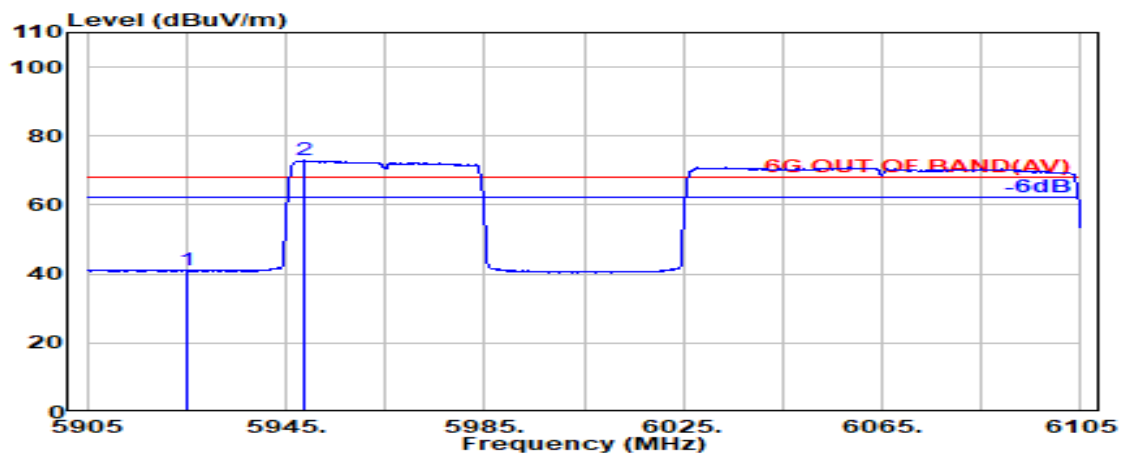

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 32.18             | 41.01                   | 68.20           | 27.19       | Average  |
| @ 5948.800               | 34.30                 | 9.00            | 34.38            | 63.98             | 72.90                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 95         |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

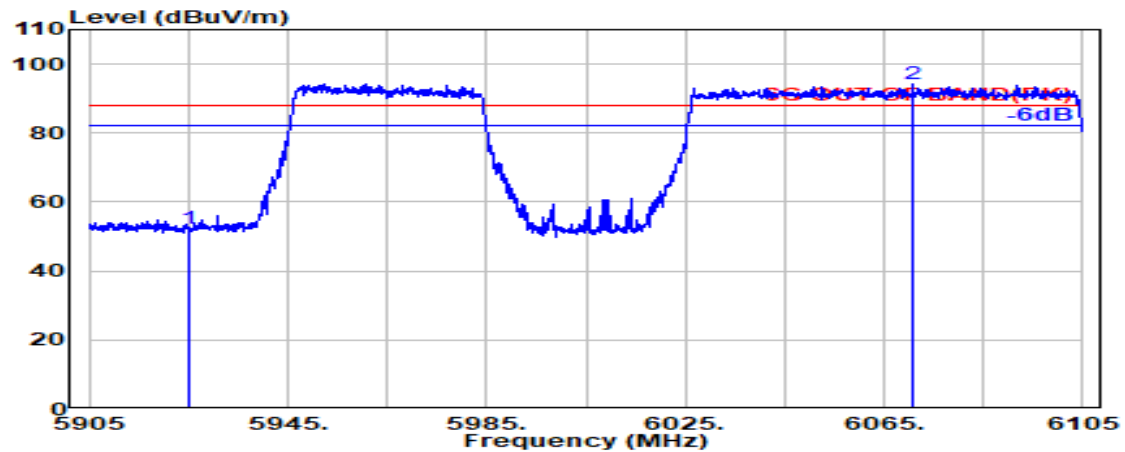

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.31             | 52.14                   | 88.20           | 36.06       | Peak     |
| @ 6070.700               | 34.24                 | 9.08            | 34.36                  | 85.32             | 94.28                   | ---             | ---         | Peak     |

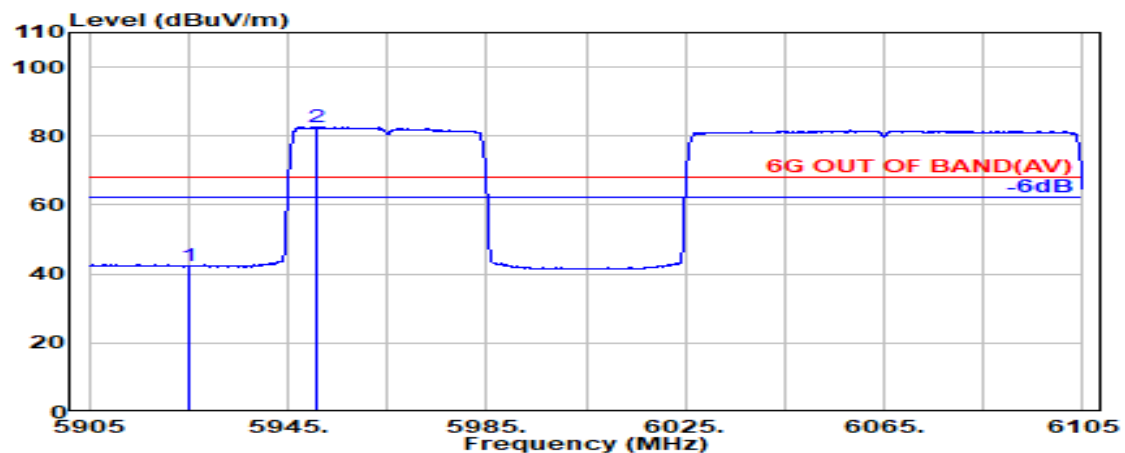

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 33.50             | 42.32                   | 68.20           | 25.88       | Average  |
| @ 5950.800               | 34.30                 | 9.00            | 34.38                  | 73.65             | 82.57                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 95         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

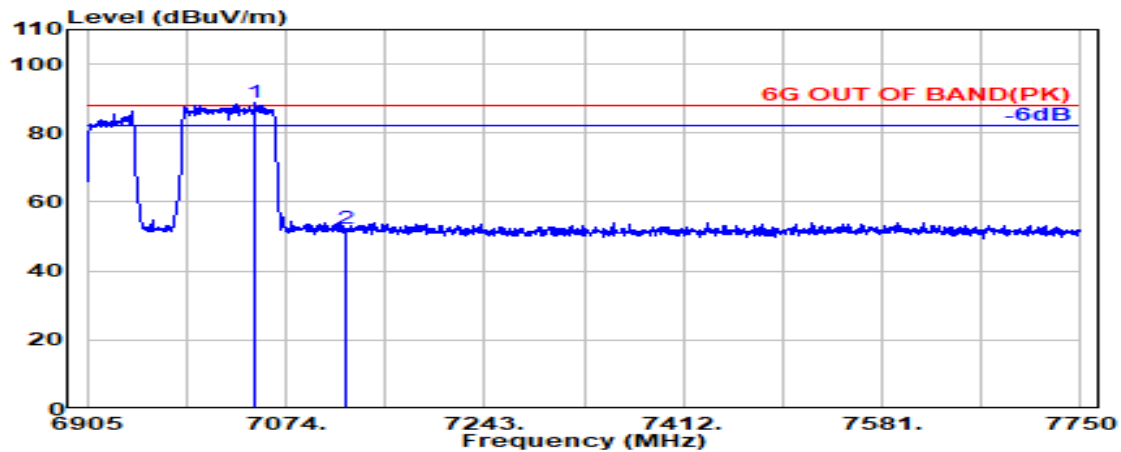

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7047.500               | 35.60                 | 9.75            | 34.43            | 77.82             | 88.73                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 41.18             | 52.39                   | 88.20           | 35.81       | Peak     |

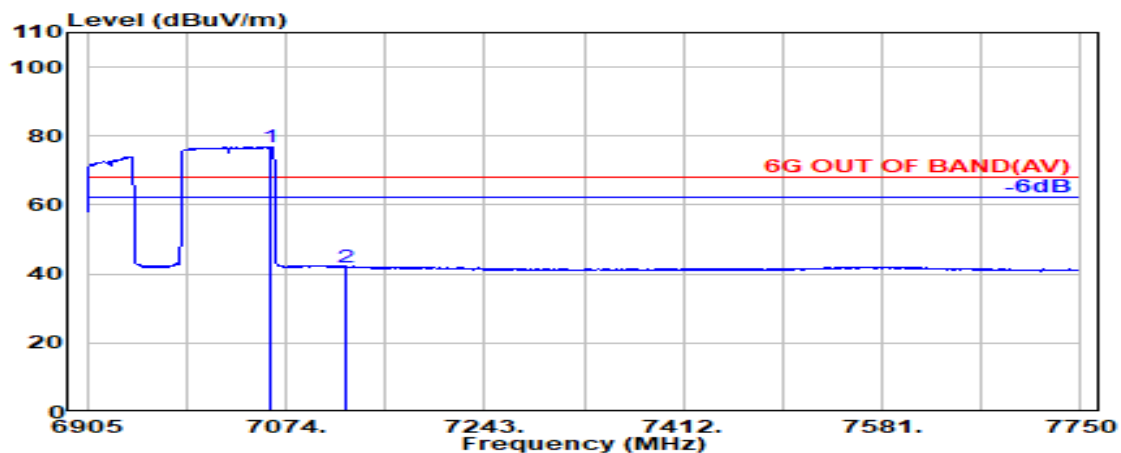

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.500               | 35.65                 | 9.76            | 34.44            | 66.01             | 76.97                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 30.89             | 42.10                   | 68.20           | 26.10       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T       | RU Index   | 95         |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

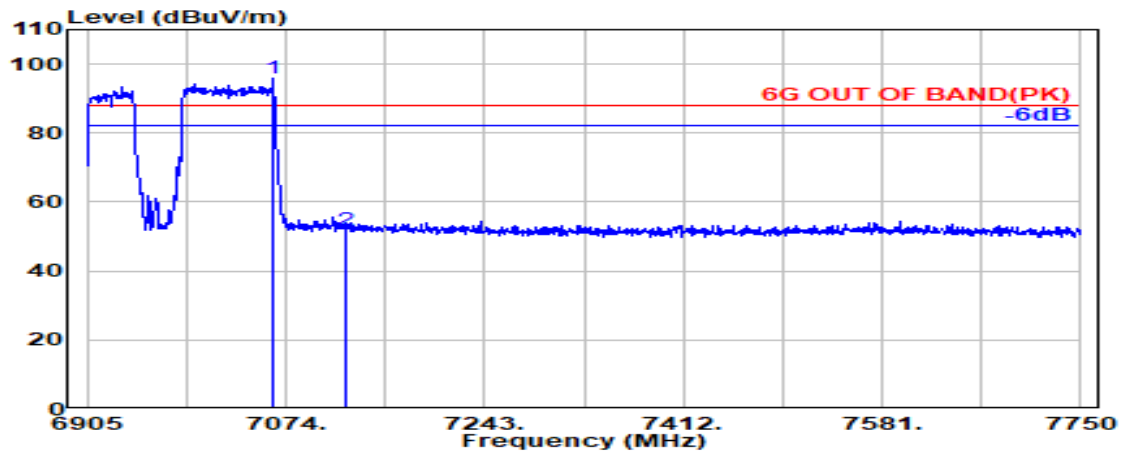

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7062.500               | 35.65                 | 9.76            | 34.45            | 84.75             | 95.72                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 40.54             | 51.75                   | 88.20           | 36.45       | Peak     |

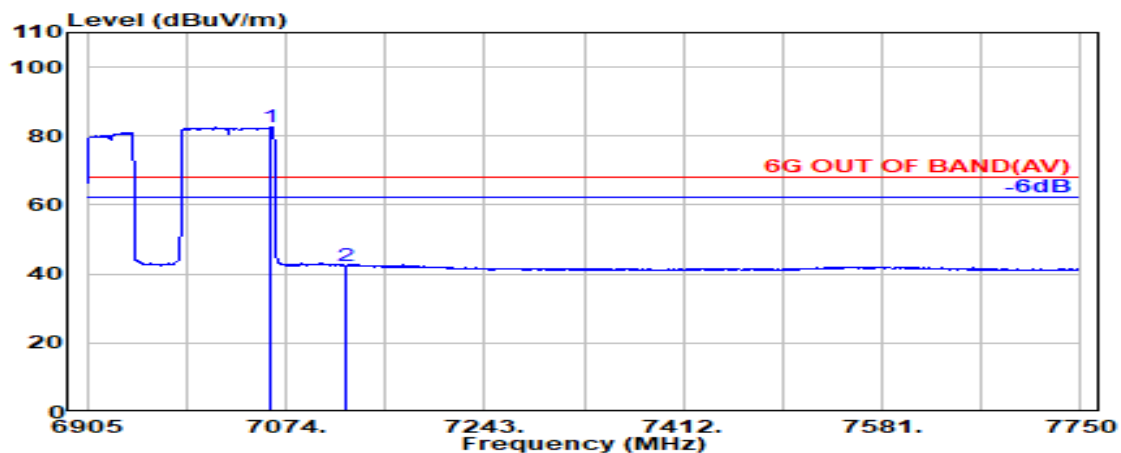

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7061.500               | 35.65                 | 9.76            | 34.44            | 71.49             | 82.46                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 31.22             | 42.43                   | 68.20           | 25.77       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | S97        |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

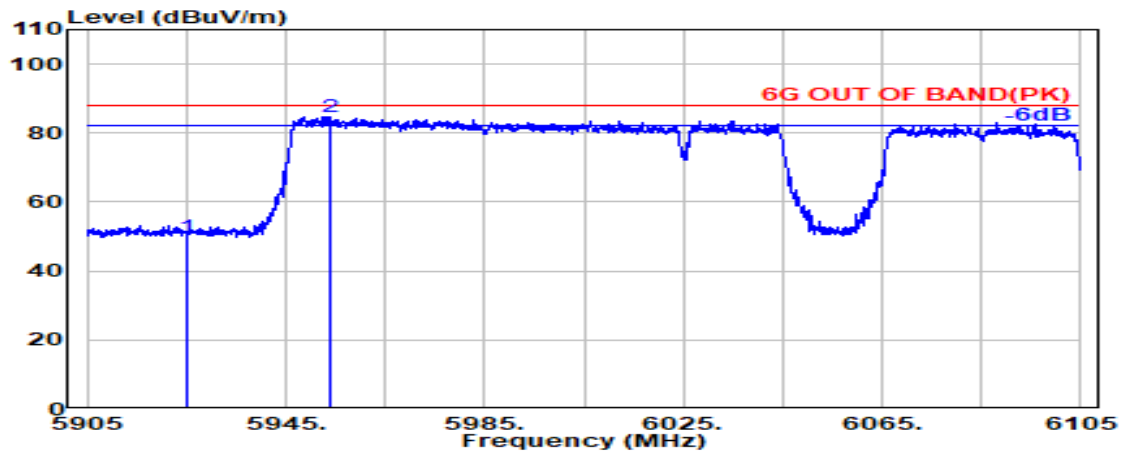

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 40.95             | 49.77                   | 88.20           | 38.43       | Peak     |
| @ 5953.700               | 34.29                 | 9.01            | 34.38            | 75.89             | 84.81                   | ---             | ---         | Peak     |

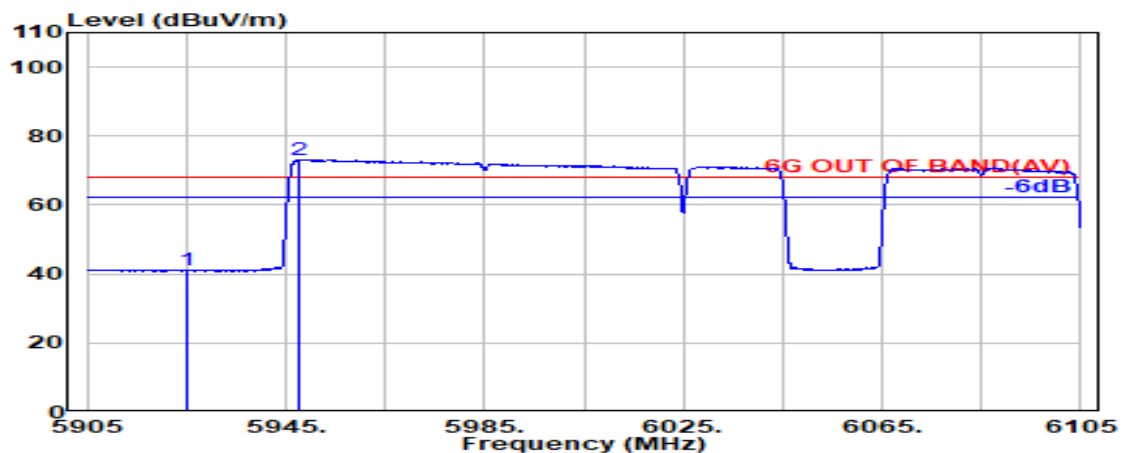

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 32.15             | 40.97                   | 68.20           | 27.23       | Average  |
| @ 5947.500               | 34.29                 | 9.00            | 34.38            | 64.28             | 73.20                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | S97        |
| Mode  | 802.11be-EHT160 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6025MHz |

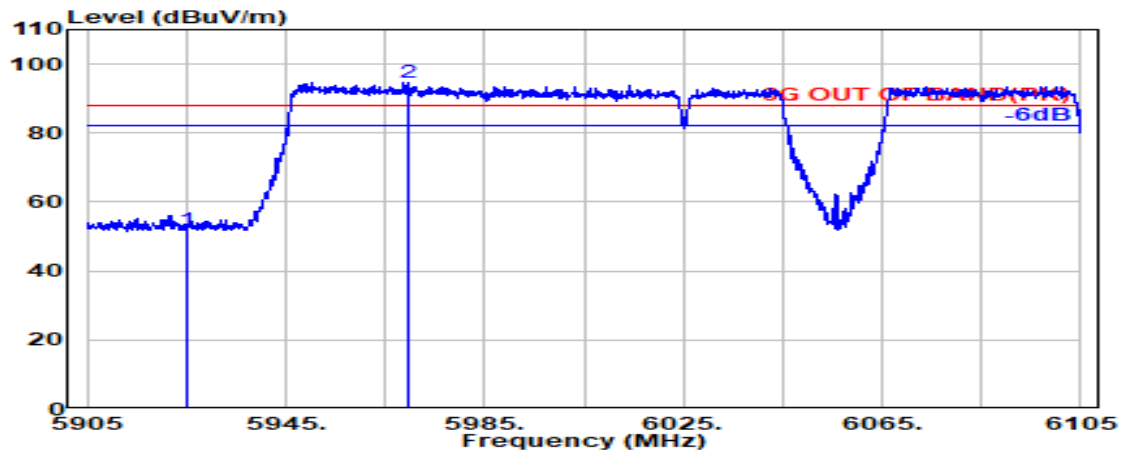

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 43.04             | 51.86                   | 88.20           | 36.34       | Peak     |
| @ 5969.500               | 34.26                 | 9.01            | 34.39                  | 85.85             | 94.74                   | ---             | ---         | Peak     |

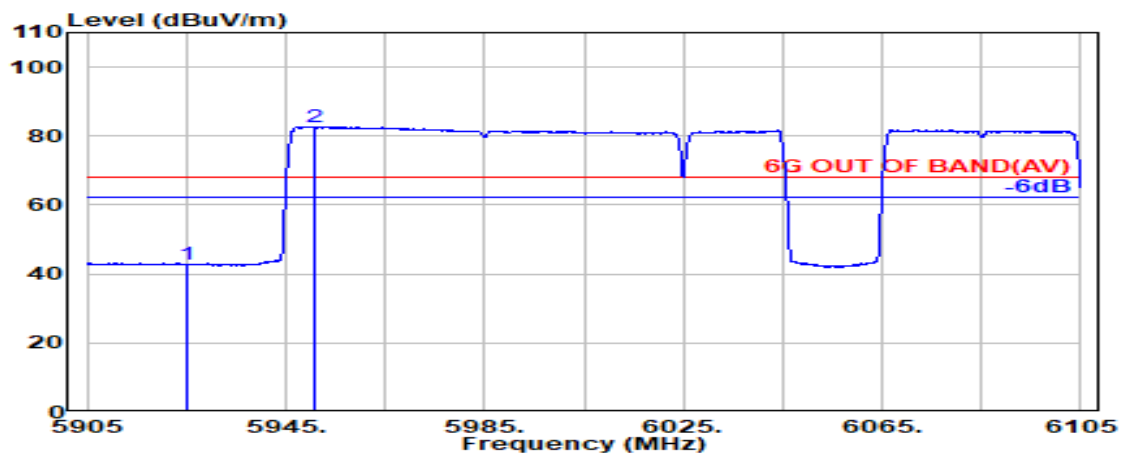

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 33.89             | 42.71                   | 68.20           | 25.49       | Average  |
| @ 5950.900               | 34.30                 | 9.00            | 34.38                  | 73.86             | 82.79                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | S98        |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

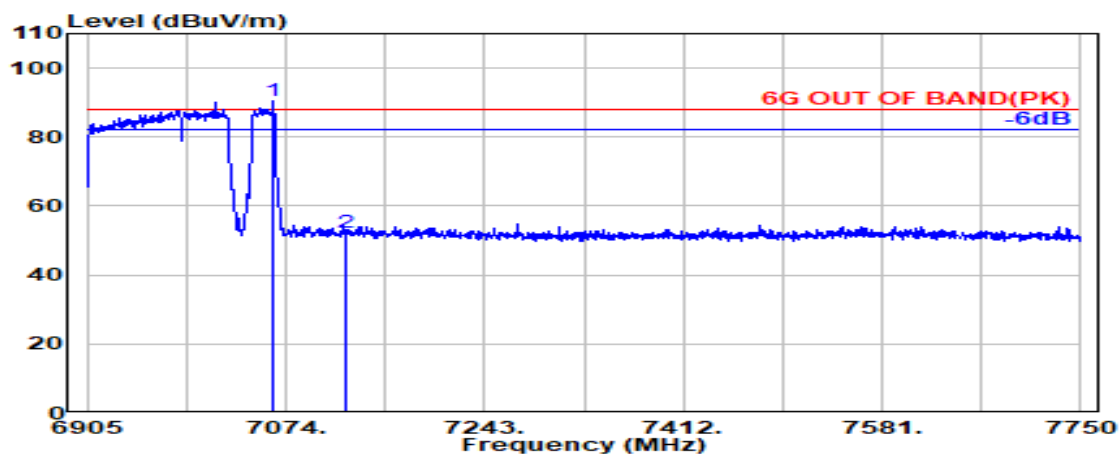

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7063.500               | 35.65                 | 9.76            | 34.45                  | 79.47             | 90.44                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 41.27             | 52.48                   | 88.20           | 35.72       | Peak     |

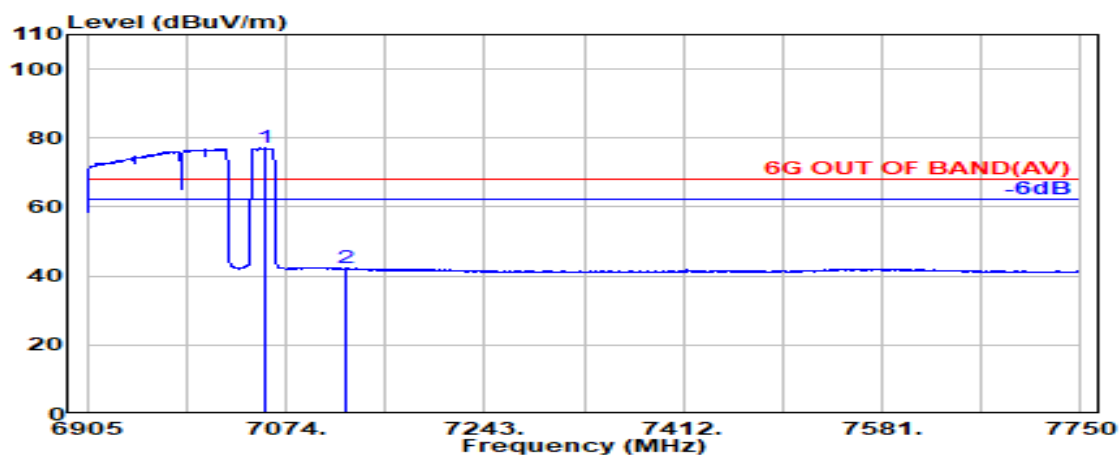

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7056.500               | 35.63                 | 9.76            | 34.44                  | 66.29             | 77.23                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 30.93             | 42.14                   | 68.20           | 26.06       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T+484T+242T  | RU Index   | S98        |
| Mode  | 802.11be-EHT160 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6985MHz |

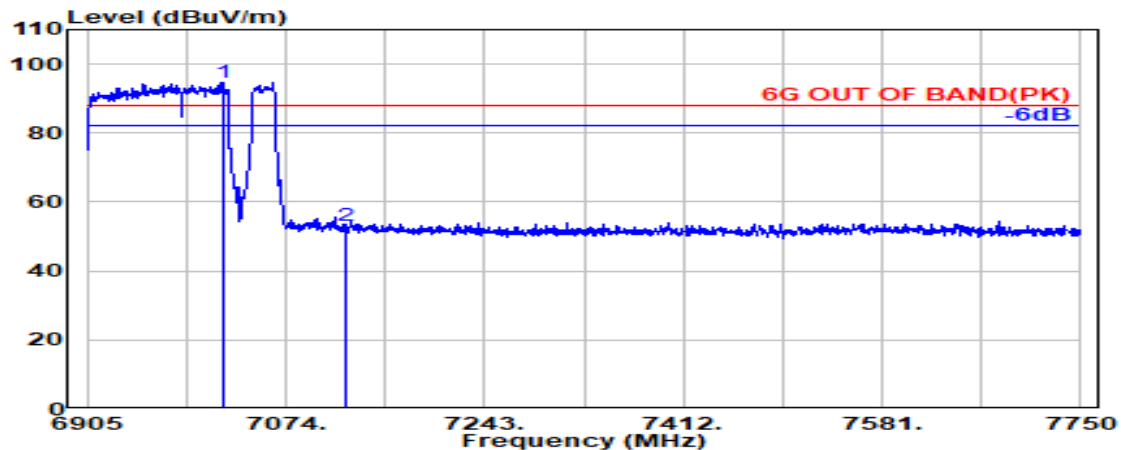

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7020.000               | 35.54                 | 9.73            | 34.41            | 83.82             | 94.68                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 42.02             | 53.23                   | 88.20           | 34.97       | Peak     |

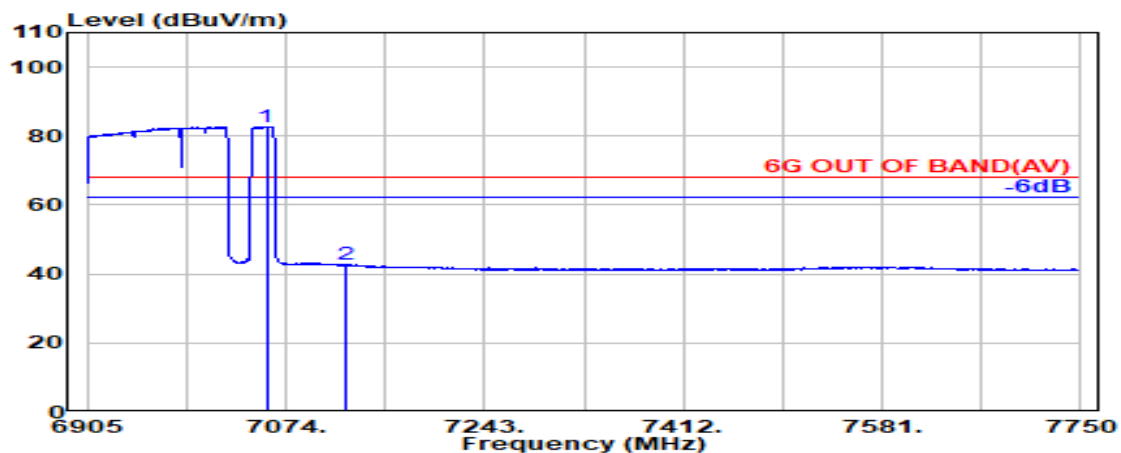

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7057.500               | 35.63                 | 9.76            | 34.44            | 71.85             | 82.79                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 31.40             | 42.61                   | 68.20           | 25.59       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | S101       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

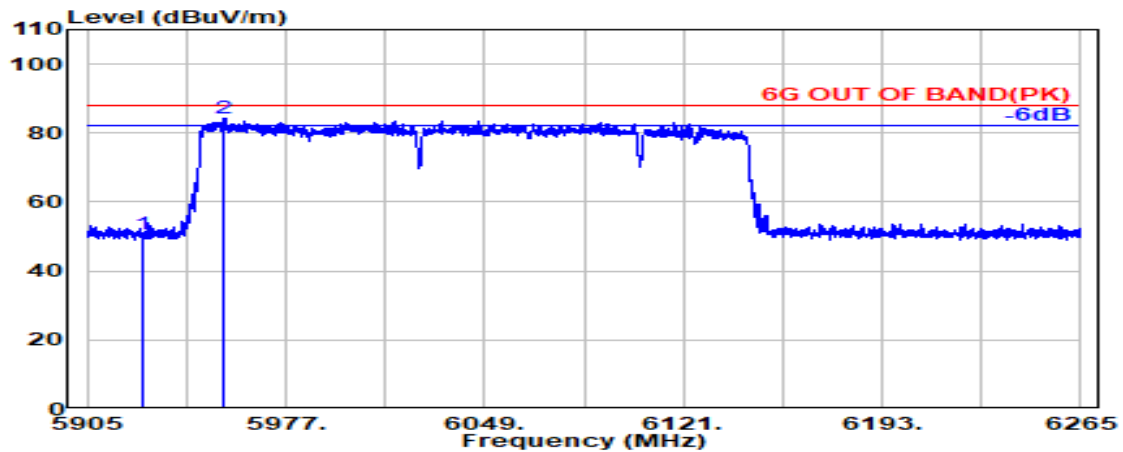

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.97             | 50.80                   | 88.20           | 37.40       | Peak     |
| @ 5954.100               | 34.29                 | 9.01            | 34.38            | 75.37             | 84.29                   | ---             | ---         | Peak     |

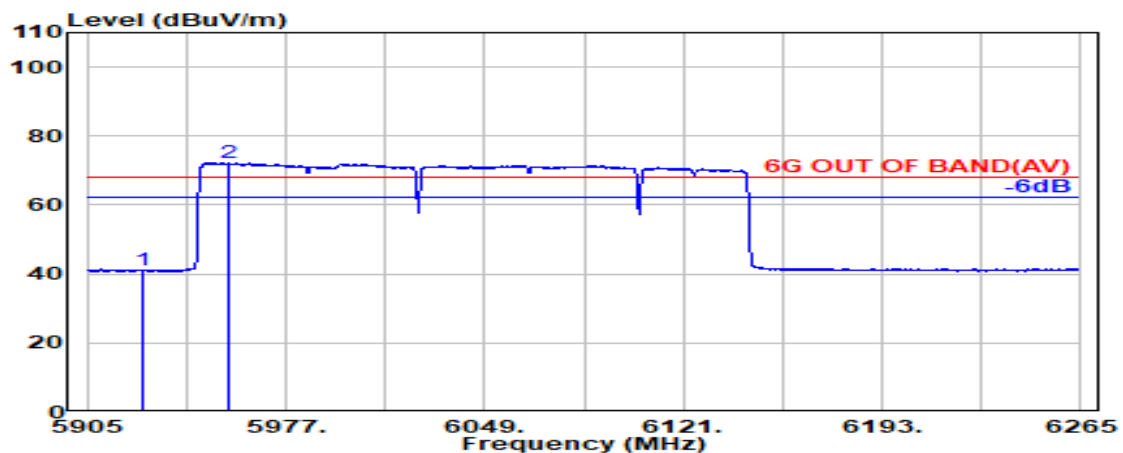

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 32.13             | 40.95                   | 68.20           | 27.25       | Average  |
| @ 5956.100               | 34.29                 | 9.01            | 34.38            | 63.28             | 72.19                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | S101       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

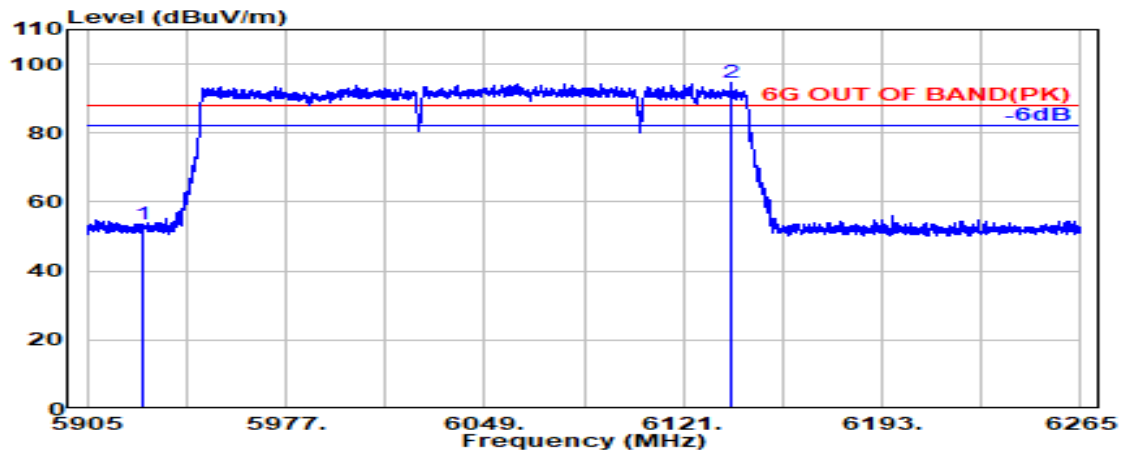

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 44.82             | 53.64                   | 88.20           | 34.56       | Peak     |
| @ 6138.500               | 34.45                 | 9.13            | 34.31            | 85.18             | 94.45                   | ---             | ---         | Peak     |

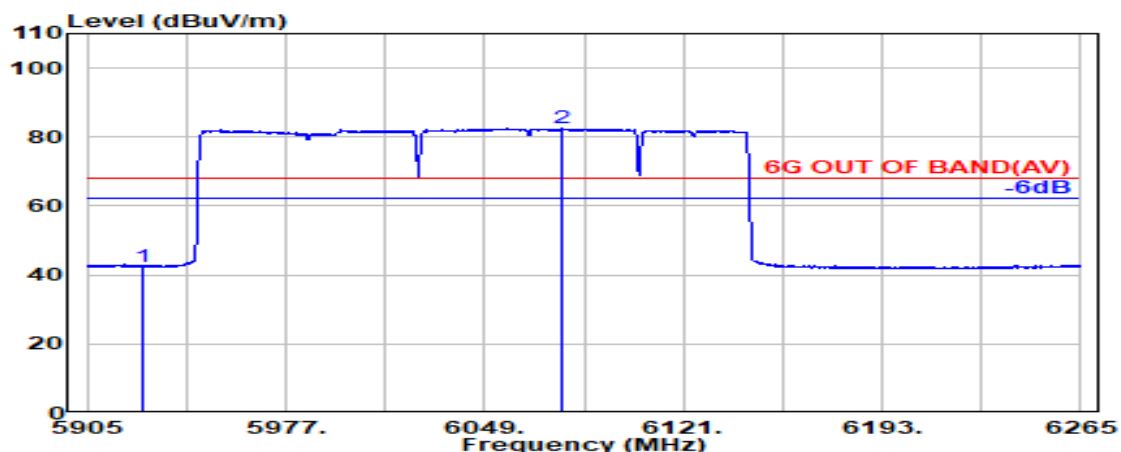

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 33.72             | 42.55                   | 68.20           | 25.65       | Average  |
| @ 6077.100               | 34.25                 | 9.09            | 34.35            | 73.51             | 82.50                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | T103       |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

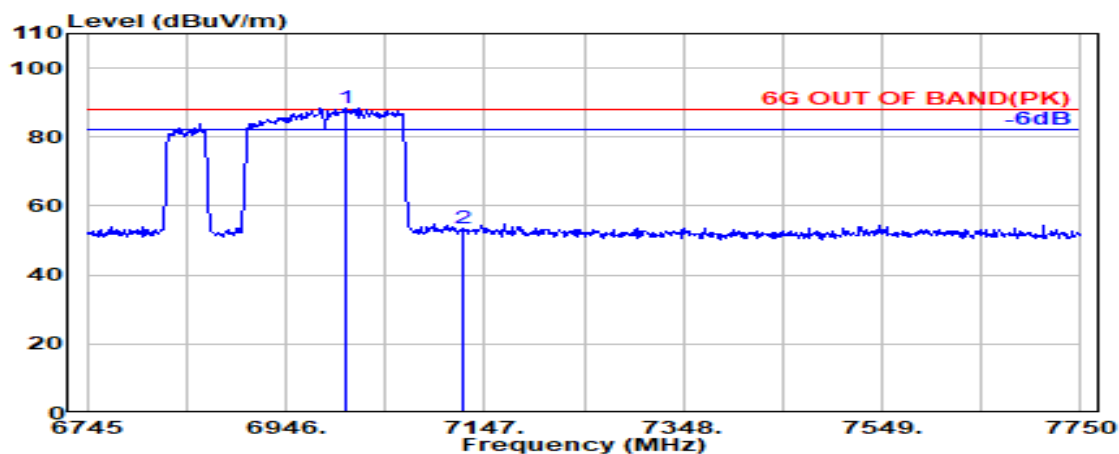

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7007.000               | 35.51                 | 9.72            | 34.41                  | 77.60             | 88.44                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 42.22             | 53.43                   | 88.20           | 34.77       | Peak     |

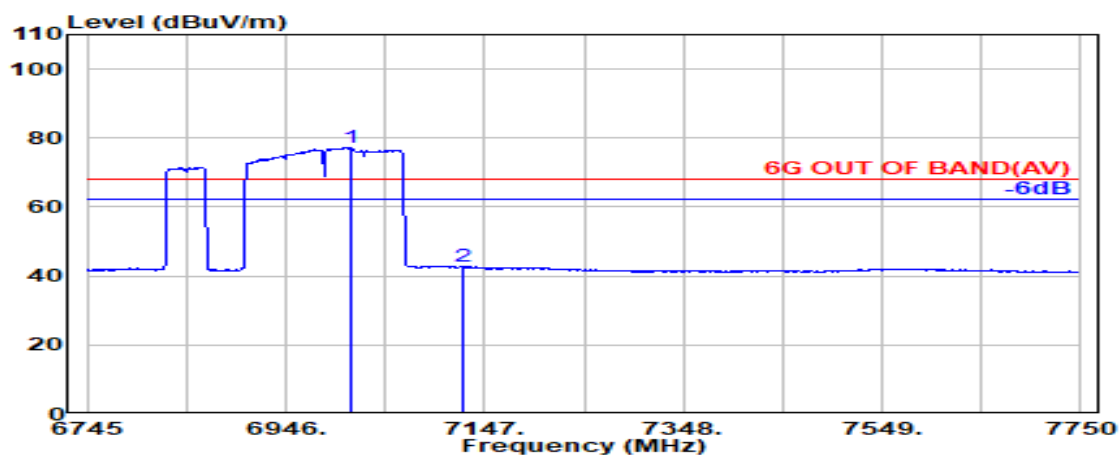

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7013.000               | 35.53                 | 9.73            | 34.41                  | 66.41             | 77.26                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49                  | 31.72             | 42.93                   | 68.20           | 25.27       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*2+484T     | RU Index   | T103       |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

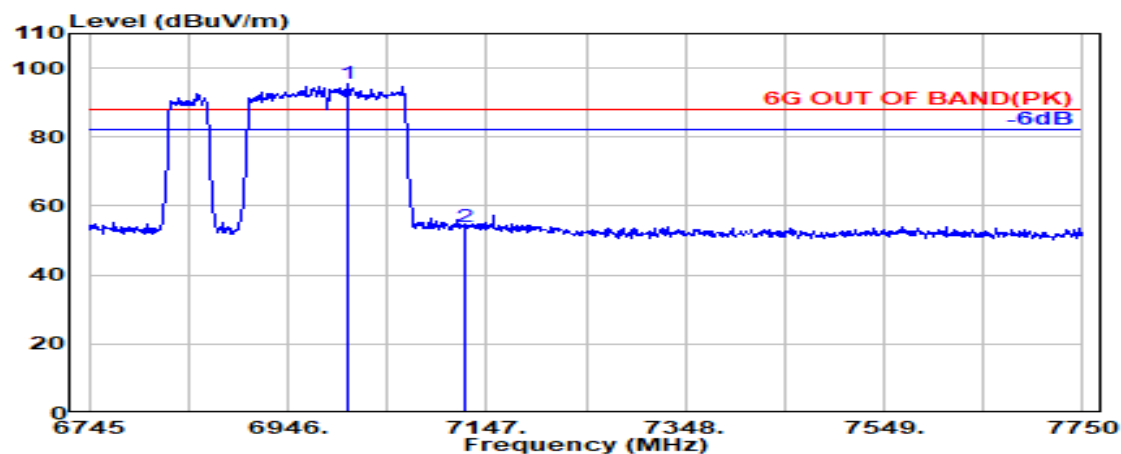

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7007.000               | 35.51                 | 9.72            | 34.41            | 84.68             | 95.51                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 42.88             | 54.09                   | 88.20           | 34.11       | Peak     |

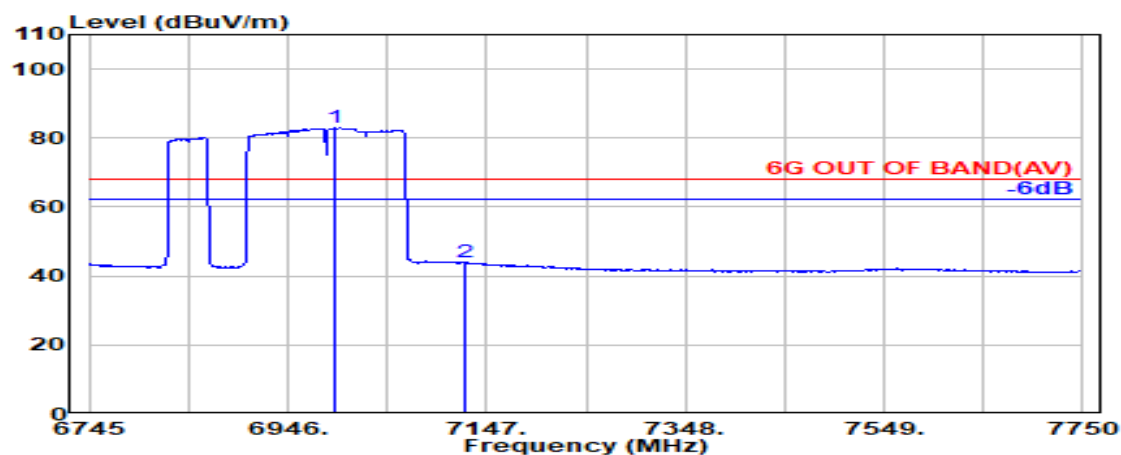

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6994.000               | 35.50                 | 9.72            | 34.40            | 72.06             | 82.88                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 32.69             | 43.90                   | 68.20           | 24.30       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | W104       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

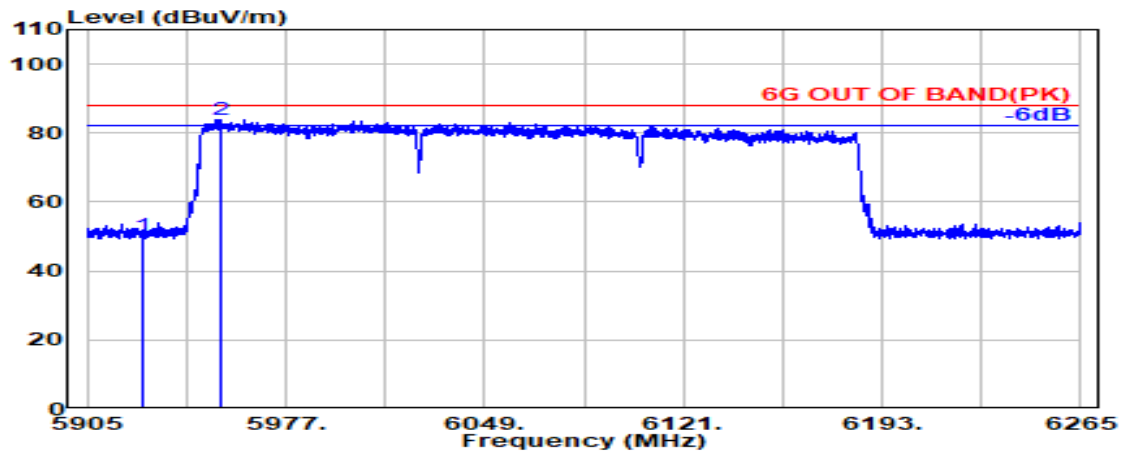

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 41.45             | 50.27                   | 88.20           | 37.93       | Peak     |
| @ 5953.900               | 34.29                 | 9.01            | 34.38            | 75.02             | 83.94                   | ---             | ---         | Peak     |

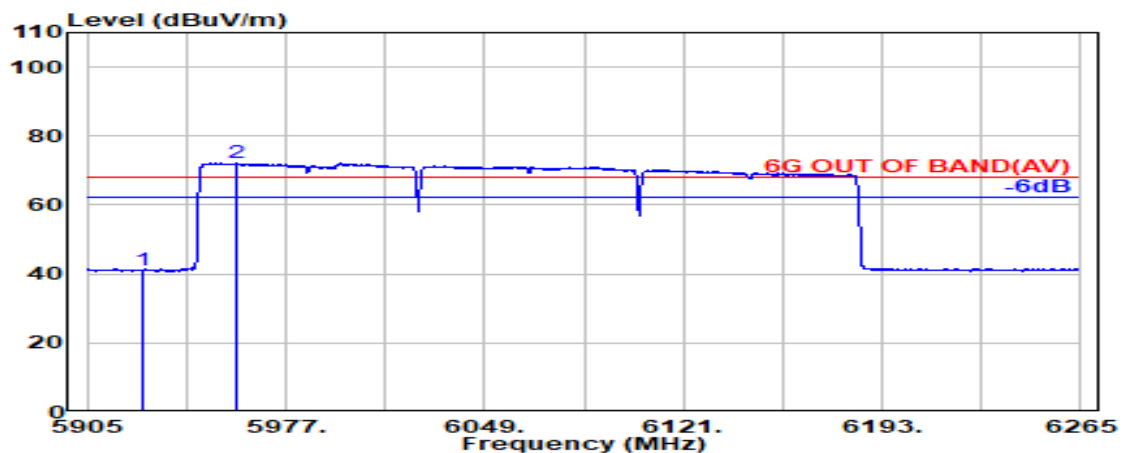

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 32.11             | 40.93                   | 68.20           | 27.27       | Average  |
| @ 5959.200               | 34.28                 | 9.01            | 34.38            | 63.18             | 72.09                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | W104       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

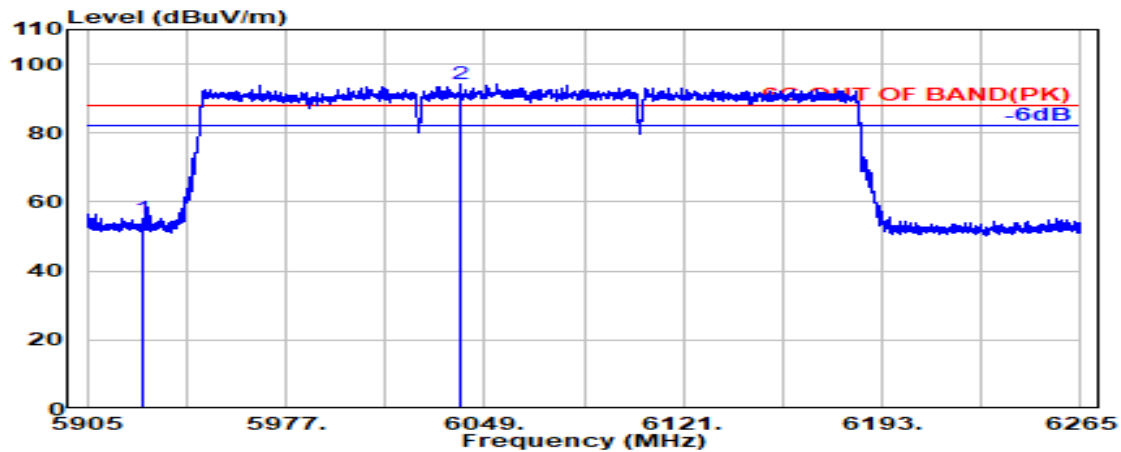

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 46.40             | 55.23                   | 88.20           | 32.97       | Peak     |
| @ 6040.300               | 34.20                 | 9.06            | 34.37                  | 85.42             | 94.31                   | ---             | ---         | Peak     |

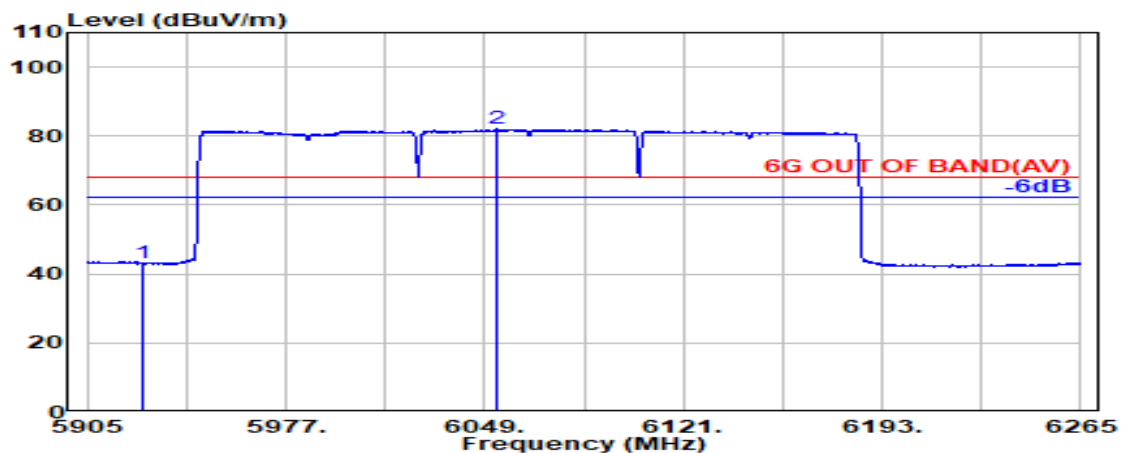

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 34.44             | 43.27                   | 68.20           | 24.93       | Average  |
| @ 6053.100               | 34.21                 | 9.07            | 34.37                  | 73.07             | 81.98                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | 104        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

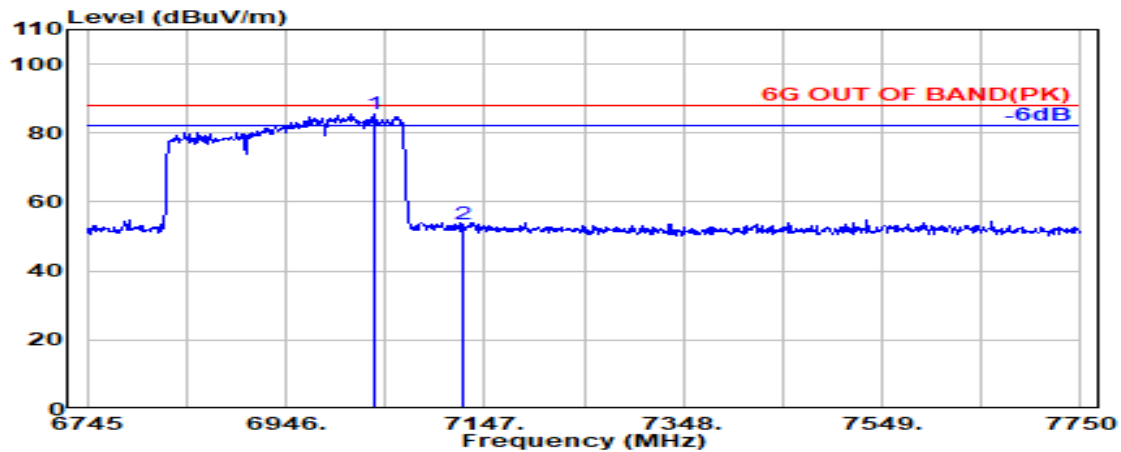

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7036.000               | 35.57                 | 9.74            | 34.43            | 74.55             | 85.44                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 42.34             | 53.55                   | 88.20           | 34.65       | Peak     |

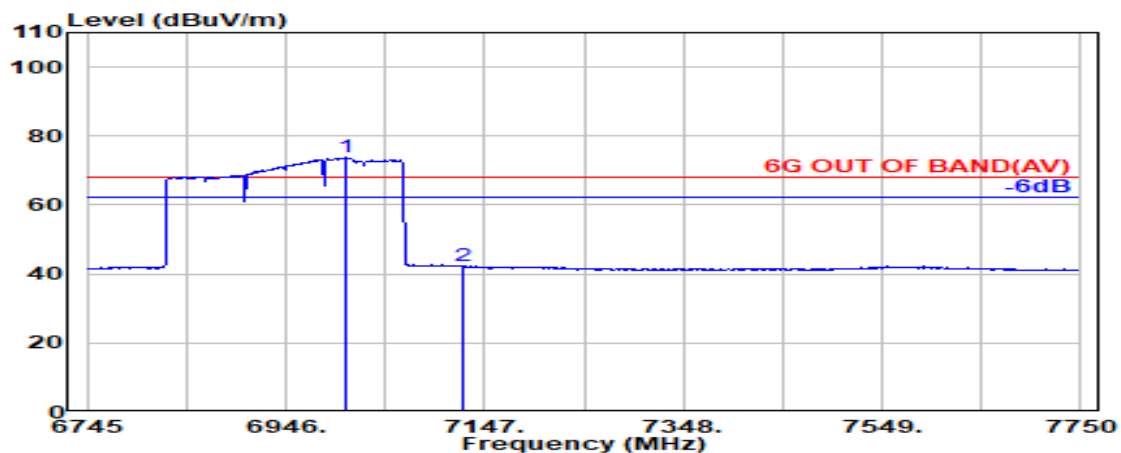

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7007.000               | 35.51                 | 9.72            | 34.41            | 62.88             | 73.71                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 30.99             | 42.20                   | 68.20           | 26.00       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3          | RU Index   | 104        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

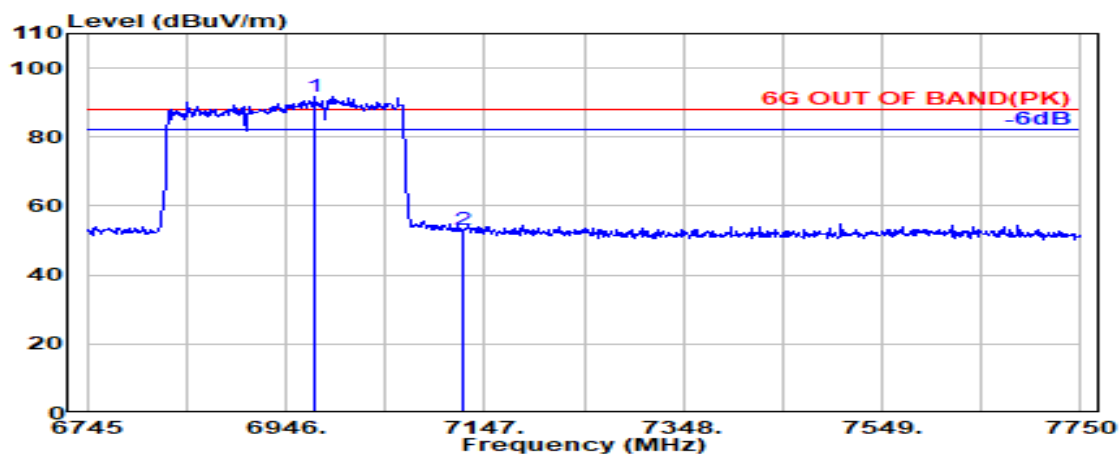

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 6974.000               | 35.50                 | 9.70            | 34.38            | 81.05             | 91.87                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 42.12             | 53.33                   | 88.20           | 34.87       | Peak     |

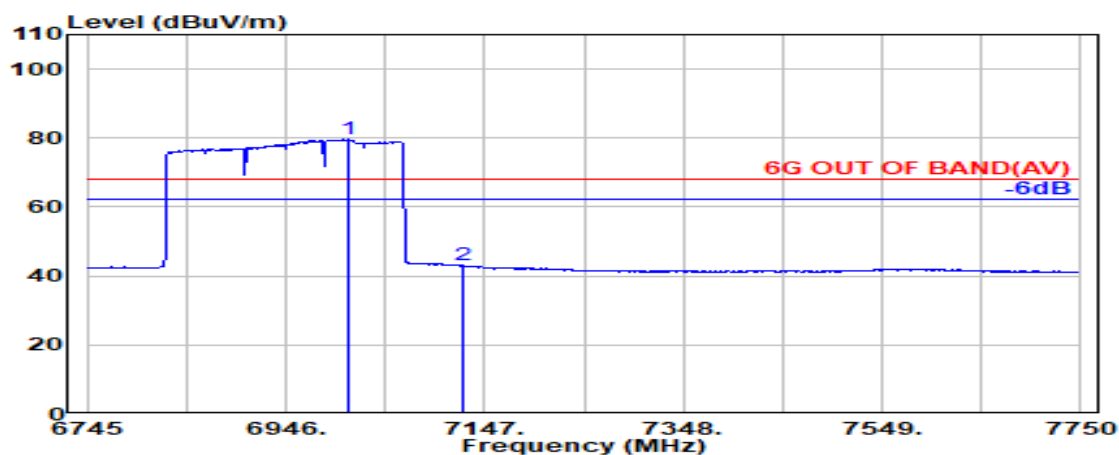

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7009.000               | 35.52                 | 9.73            | 34.41            | 68.80             | 79.64                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 31.87             | 43.08                   | 68.20           | 25.12       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | W106       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

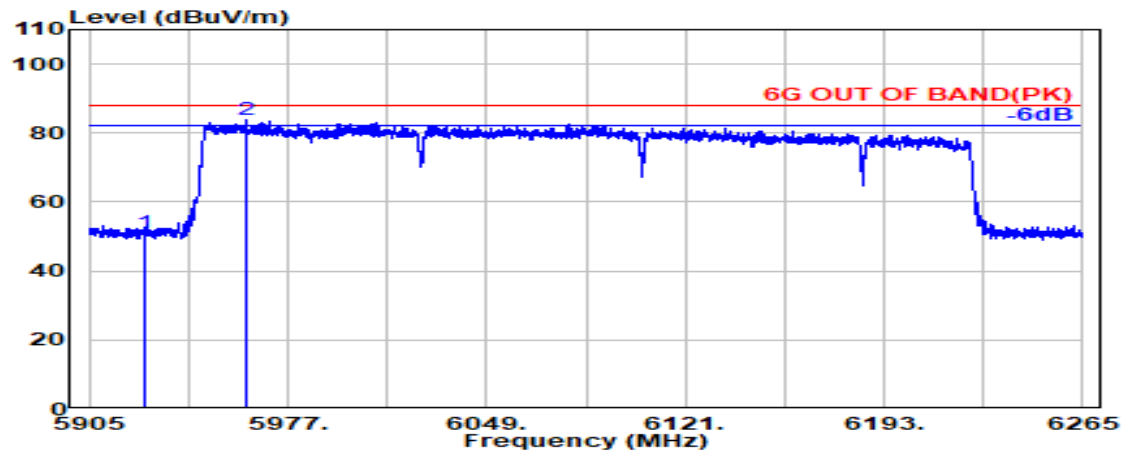

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 42.27             | 51.09                   | 88.20           | 37.11       | Peak     |
| @ 5962.200               | 34.28                 | 9.01            | 34.38            | 75.01             | 83.91                   | ---             | ---         | Peak     |

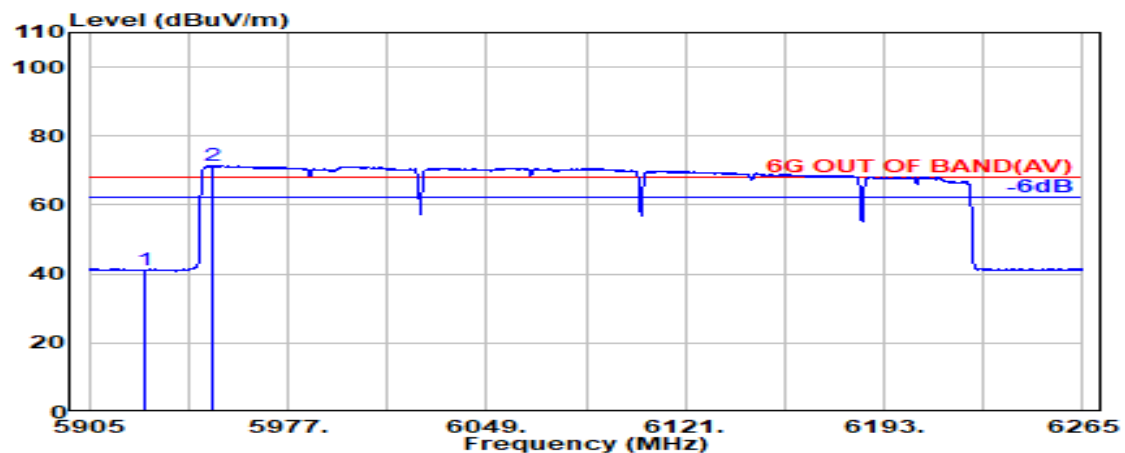

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37            | 32.34             | 41.17                   | 68.20           | 27.03       | Average  |
| @ 5950.100               | 34.30                 | 9.00            | 34.38            | 62.67             | 71.59                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | W106       |
| Mode  | 802.11be-EHT320 | U-NII Band | 5          |
|       |                 | Frequency  | TX 6105MHz |

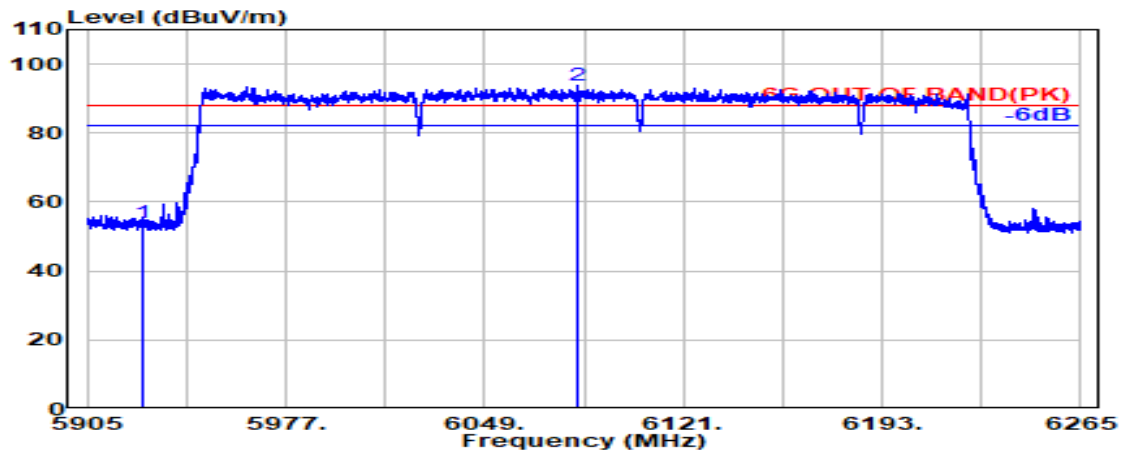

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 45.02             | 53.85                   | 88.20           | 34.35       | Peak     |
| @ 6082.800               | 34.27                 | 9.09            | 34.35                  | 84.77             | 93.78                   | ---             | ---         | Peak     |

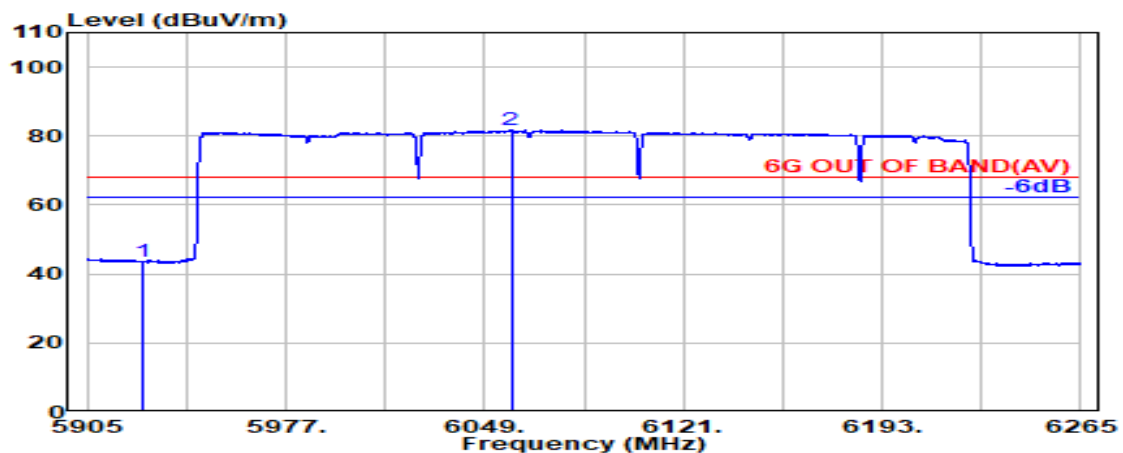

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5925.000                 | 34.20                 | 8.99            | 34.37                  | 34.60             | 43.43                   | 68.20           | 24.77       | Average  |
| @ 6058.600               | 34.22                 | 9.07            | 34.36                  | 72.74             | 81.67                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | 105        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

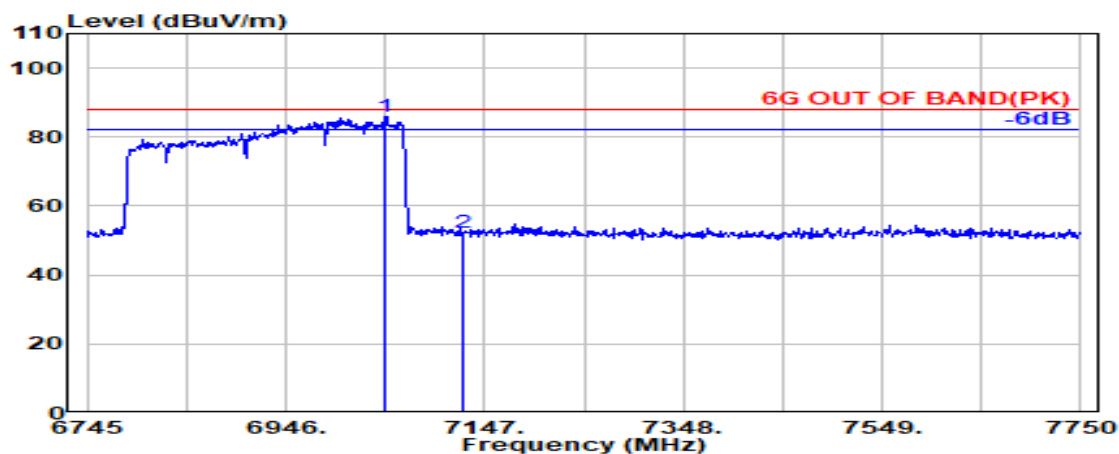

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7047.000               | 35.59                 | 9.75            | 34.43            | 75.16             | 86.07                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 41.09             | 52.30                   | 88.20           | 35.90       | Peak     |

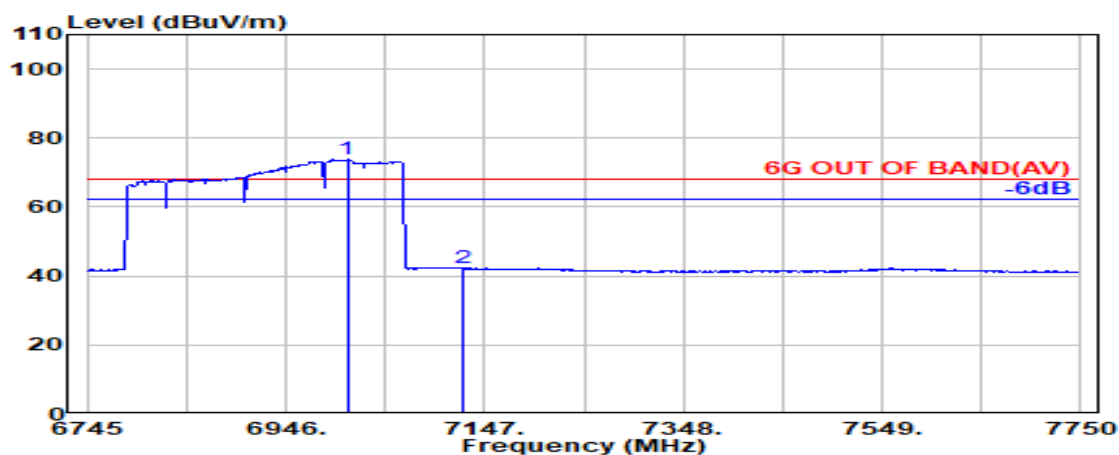

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7008.000               | 35.52                 | 9.73            | 34.41            | 62.90             | 73.73                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 31.11             | 42.32                   | 68.20           | 25.88       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel:** +886 2 26099301  
**Fax:** +886 2 26099303

|       |                 |            |            |
|-------|-----------------|------------|------------|
| Tones | 996T*3+484T     | RU Index   | 105        |
| Mode  | 802.11be-EHT320 | U-NII Band | 8          |
|       |                 | Frequency  | TX 6905MHz |

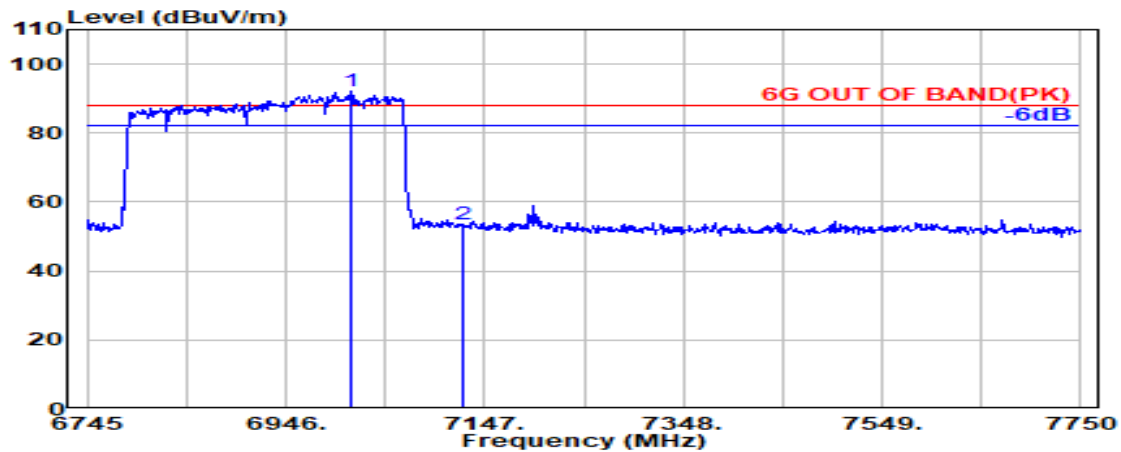

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7013.000               | 35.53                 | 9.73            | 34.41            | 81.38             | 92.22                   | ---             | ---         | Peak     |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 42.20             | 53.42                   | 88.20           | 34.78       | Peak     |

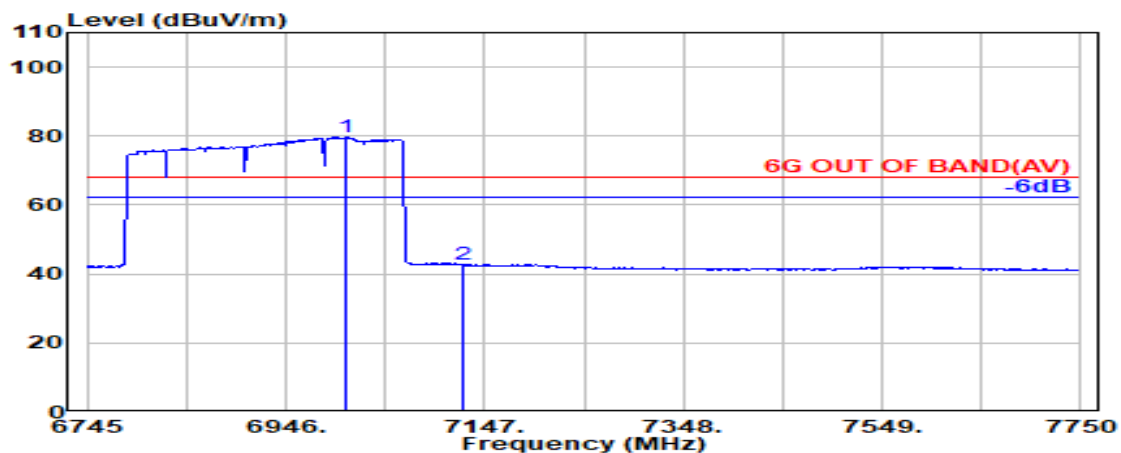

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 7007.000               | 35.51                 | 9.72            | 34.41            | 68.83             | 79.66                   | ---             | ---         | Average  |
| 7125.000                 | 35.90                 | 9.80            | 34.49            | 31.67             | 42.89                   | 68.20           | 25.31       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303****A.2.2 Emissions outside the frequency band**

The emissions (up to 40GHz) not reported for there is no emission be found.

## ● OFDM Modulation

Antenna: INPAQ

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 6415MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 29.26             | 49.56                   | 54.00           | 4.44        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 29.50             | 49.80                   | 54.00           | 4.20        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 6          |
|      |               | Frequency  | TX 6515MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 28.44             | 49.85                   | 54.00           | 4.15        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 29.76             | 51.18                   | 54.00           | 2.82        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 7          |
|      |               | Frequency  | TX 6695MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 28.01             | 50.87                   | 54.00           | 3.13        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 27.14             | 50.00                   | 54.00           | 4.00        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 6875MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 26.63             | 49.96                   | 54.00           | 4.04        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 26.42             | 49.75                   | 54.00           | 4.25        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 30.71             | 49.17                   | 54.00           | 4.83        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 30.95             | 49.41                   | 54.00           | 4.59        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 6          |
|      |               | Frequency  | TX 6445MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 30.23             | 50.92                   | 54.00           | 3.08        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 29.79             | 50.48                   | 54.00           | 3.52        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 7          |
|      |               | Frequency  | TX 6685MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13370.000                      | 40.77                       | 15.04                 | 33.00                  | 28.66                   | 51.47                         | 54.00              | 2.53           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13370.000                      | 40.77                       | 15.04                 | 33.00                  | 27.49                   | 50.30                         | 54.00              | 3.70           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 6885MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14010.000                      | 41.71                       | 15.34                 | 33.01                  | 27.39                   | 51.43                         | 54.00              | 2.57           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14010.000                      | 41.71                       | 15.34                 | 33.01                  | 25.62                   | 49.66                         | 54.00              | 4.34           | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 6385MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 30.64                   | 49.06                         | 54.00              | 4.94           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 30.89                   | 49.31                         | 54.00              | 4.69           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 6          |
|      |               | Frequency  | TX 6545MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12930.000                      | 39.59                       | 14.80                 | 33.47                  | 29.06                   | 49.98                         | 54.00              | 4.02           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12930.000                      | 39.59                       | 14.80                 | 33.47                  | 28.66                   | 49.59                         | 54.00              | 4.41           | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 7          |
|      |               | Frequency  | TX 6705MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13410.000                      | 40.80                       | 15.06                 | 32.97                  | 28.12                   | 51.02                         | 54.00              | 2.98           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13410.000                      | 40.80                       | 15.06                 | 32.97                  | 27.20                   | 50.09                         | 54.00              | 3.91           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14050.000                      | 41.75                       | 15.39                 | 33.05                  | 27.03                   | 51.11                         | 54.00              | 2.89           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14050.000                      | 41.75                       | 15.39                 | 33.05                  | 27.74                   | 51.82                         | 54.00              | 2.18           | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 30.41                   | 48.80                         | 54.00              | 5.20           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 30.64                   | 49.03                         | 54.00              | 4.97           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 6          |
|      |                | Frequency  | TX 6505MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 28.80                   | 50.14                         | 54.00              | 3.86           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 27.91                   | 49.25                         | 54.00              | 4.75           | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 7          |
|      |                | Frequency  | TX 6665MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 27.76                   | 50.47                         | 54.00              | 3.53           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 27.66                   | 50.38                         | 54.00              | 3.62           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 26.99                   | 50.89                         | 54.00              | 3.11           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 27.05                   | 50.96                         | 54.00              | 3.04           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 5          |
|      |                | Frequency  | TX 6415MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 30.35             | 50.65                   | 54.00           | 3.35        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 30.06             | 50.36                   | 54.00           | 3.64        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 6          |
|      |                | Frequency  | TX 6515MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 30.14             | 51.55                   | 54.00           | 2.45        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 29.17             | 50.58                   | 54.00           | 3.42        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 7          |
|      |                | Frequency  | TX 6695MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 28.92             | 51.78                   | 54.00           | 2.22        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 28.13             | 50.99                   | 54.00           | 3.01        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 8          |
|      |                | Frequency  | TX 6875MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 26.57             | 49.89                   | 54.00           | 4.11        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 26.92             | 50.25                   | 54.00           | 3.75        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 5          |
|      |                | Frequency  | TX 5965MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 31.52             | 49.98                   | 54.00           | 4.02        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 31.12             | 49.58                   | 54.00           | 4.42        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 6          |
|      |                | Frequency  | TX 6445MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 30.58             | 51.27                   | 54.00           | 2.73        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 30.00             | 50.69                   | 54.00           | 3.31        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 7          |
|      |                | Frequency  | TX 6685MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13370.000                | 40.77                 | 15.04           | 33.00                  | 28.01             | 50.83                   | 54.00           | 3.17        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13370.000                | 40.77                 | 15.04           | 33.00                  | 28.39             | 51.20                   | 54.00           | 2.80        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 8          |
|      |                | Frequency  | TX 6885MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13770.000                | 41.07                 | 15.23           | 32.95                  | 27.74             | 51.09                   | 54.00           | 2.91        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13770.000                | 41.07                 | 15.23           | 32.95                  | 26.87             | 50.22                   | 54.00           | 3.78        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 5          |
|      |                | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 30.40                   | 48.82                         | 54.00              | 5.18           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 31.56                   | 49.98                         | 54.00              | 4.02           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 6          |
|      |                | Frequency  | TX 6545MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13090.000                      | 39.98                       | 14.91                 | 33.27                  | 28.56                   | 50.18                         | 54.00              | 3.82           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13090.000                      | 39.98                       | 14.91                 | 33.27                  | 27.91                   | 49.53                         | 54.00              | 4.47           | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 7          |
|      |                | Frequency  | TX 6625MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13250.000                | 40.50                 | 14.99           | 33.12                  | 28.14             | 50.51                   | 54.00           | 3.49        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13250.000                | 40.50                 | 14.99           | 33.12                  | 28.71             | 51.08                   | 54.00           | 2.92        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 8          |
|      |                | Frequency  | TX 6945MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 14050.000                | 41.75                 | 15.39           | 33.05                  | 26.70             | 50.78                   | 54.00           | 3.22        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 14050.000                | 41.75                 | 15.39           | 33.05                  | 26.03             | 50.11                   | 54.00           | 3.89        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6025MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 30.69                   | 49.08                         | 54.00              | 4.92           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 31.25                   | 49.64                         | 54.00              | 4.36           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 6          |
|      |                 | Frequency  | TX 6505MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 28.06                   | 49.40                         | 54.00              | 4.60           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 27.74                   | 49.08                         | 54.00              | 4.92           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6665MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 28.30                   | 51.02                         | 54.00              | 2.98           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 27.59                   | 50.31                         | 54.00              | 3.69           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6985MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 25.91                   | 49.81                         | 54.00              | 4.19           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 27.50                   | 51.40                         | 54.00              | 2.60           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6425MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12850.000                | 39.30                 | 14.73           | 33.59                  | 29.31             | 49.74                   | 54.00           | 4.26        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12850.000                | 39.30                 | 14.73           | 33.59                  | 29.86             | 50.29                   | 54.00           | 3.71        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 6          |
|      |                 | Frequency  | TX 6585MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13170.000                | 40.21                 | 14.95           | 33.19                  | 28.05             | 50.02                   | 54.00           | 3.98        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13170.000                | 40.21                 | 14.95           | 33.19                  | 28.59             | 50.56                   | 54.00           | 3.44        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6745MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13490.000                | 40.80                 | 15.10           | 32.89                  | 26.38             | 49.39                   | 54.00           | 4.61        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13490.000                | 40.80                 | 15.10           | 32.89                  | 27.51             | 50.52                   | 54.00           | 3.48        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6905MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13810.000                | 41.12                 | 15.25           | 32.95                  | 26.88             | 50.29                   | 54.00           | 3.71        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13810.000                | 41.12                 | 15.25           | 32.95                  | 27.43             | 50.84                   | 54.00           | 3.16        | Peak     |

## Antenna: LUXSHARE-ICT

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 5          |
|      |               | Frequency  | TX 6415MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 29.91             | 50.21                   | 54.00           | 3.79        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 29.35             | 49.65                   | 54.00           | 4.35        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 6          |
|      |               | Frequency  | TX 6515MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 28.54             | 49.95                   | 54.00           | 4.05        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 28.36             | 49.78                   | 54.00           | 4.22        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 7          |
|      |               | Frequency  | TX 6695MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 27.82             | 50.68                   | 54.00           | 3.32        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 26.76             | 49.62                   | 54.00           | 4.38        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 8          |
|      |               | Frequency  | TX 6875MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 27.03             | 50.35                   | 54.00           | 3.65        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 26.50             | 49.83                   | 54.00           | 4.17        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 5          |
|      |               | Frequency  | TX 5965MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 30.67             | 49.13                   | 54.00           | 4.87        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 30.07             | 48.53                   | 54.00           | 5.47        | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 6          |
|      |               | Frequency  | TX 6445MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 29.43             | 50.12                   | 54.00           | 3.88        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 28.50             | 49.19                   | 54.00           | 4.81        | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 7          |
|      |               | Frequency  | TX 6685MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13370.000                      | 40.77                       | 15.04                 | 33.00                  | 27.61                   | 50.42                         | 54.00              | 3.58           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13370.000                      | 40.77                       | 15.04                 | 33.00                  | 27.84                   | 50.65                         | 54.00              | 3.35           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 8          |
|      |               | Frequency  | TX 7005MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14010.000                      | 41.71                       | 15.34                 | 33.01                  | 26.01                   | 50.05                         | 54.00              | 3.95           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14010.000                      | 41.71                       | 15.34                 | 33.01                  | 26.54                   | 50.58                         | 54.00              | 3.42           | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 5          |
|      |               | Frequency  | TX 5985MHz |

#### Antenna at Horizontal Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 31.21                   | 49.63                         | 54.00              | 4.37           | Peak     |

#### Antenna at Vertical Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 30.17                   | 48.59                         | 54.00              | 5.41           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 6          |
|      |               | Frequency  | TX 6465MHz |

#### Antenna at Horizontal Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12930.000                      | 39.59                       | 14.80                 | 33.47                  | 28.81                   | 49.74                         | 54.00              | 4.26           | Peak     |

#### Antenna at Vertical Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12930.000                      | 39.59                       | 14.80                 | 33.47                  | 29.34                   | 50.27                         | 54.00              | 3.73           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 7          |
|      |               | Frequency  | TX 6705MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13410.000                      | 40.80                       | 15.06                 | 32.97                  | 27.12                   | 50.02                         | 54.00              | 3.98           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13410.000                      | 40.80                       | 15.06                 | 32.97                  | 26.41                   | 49.30                         | 54.00              | 4.70           | Peak     |

|      |               |            |            |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 8          |
|      |               | Frequency  | TX 7025MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14050.000                      | 41.75                       | 15.39                 | 33.05                  | 26.64                   | 50.72                         | 54.00              | 3.28           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14050.000                      | 41.75                       | 15.39                 | 33.05                  | 26.49                   | 50.57                         | 54.00              | 3.43           | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 5          |
|      |                | Frequency  | TX 6025MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 29.97                   | 48.35                         | 54.00              | 5.65           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 31.17                   | 49.56                         | 54.00              | 4.44           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 6          |
|      |                | Frequency  | TX 6505MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 28.41                   | 49.76                         | 54.00              | 4.24           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 28.63                   | 49.98                         | 54.00              | 4.02           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 7          |
|      |                | Frequency  | TX 6665MHz |

## Antenna at Horizontal Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 27.31                   | 50.03                         | 54.00              | 3.97           | Peak     |

## Antenna at Vertical Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 27.42                   | 50.13                         | 54.00              | 3.87           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 8          |
|      |                | Frequency  | TX 6985MHz |

## Antenna at Horizontal Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 25.39                   | 49.29                         | 54.00              | 4.71           | Peak     |

## Antenna at Vertical Polarization

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 26.02                   | 49.92                         | 54.00              | 4.08           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 5          |
|      |                | Frequency  | TX 6415MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 30.52             | 50.82                   | 54.00           | 3.18        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12830.000                | 39.22                 | 14.71           | 33.63                  | 29.81             | 50.11                   | 54.00           | 3.89        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 6          |
|      |                | Frequency  | TX 6515MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 28.87             | 50.28                   | 54.00           | 3.72        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13030.000                | 39.86                 | 14.88           | 33.33                  | 27.49             | 48.91                   | 54.00           | 5.09        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 7          |
|      |                | Frequency  | TX 6695MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 28.21             | 51.07                   | 54.00           | 2.93        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13390.000                | 40.79                 | 15.05           | 32.98                  | 26.62             | 49.48                   | 54.00           | 4.52        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT20 | U-NII Band | 8          |
|      |                | Frequency  | TX 6875MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 27.11             | 50.44                   | 54.00           | 3.56        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13750.000                | 41.05                 | 15.22           | 32.94                  | 25.74             | 49.07                   | 54.00           | 4.93        | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 5          |
|      |                | Frequency  | TX 5965MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 31.04             | 49.50                   | 54.00           | 4.50        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11930.000                | 39.24                 | 13.79           | 34.57                  | 29.98             | 48.44                   | 54.00           | 5.56        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 6          |
|      |                | Frequency  | TX 6445MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 29.03             | 49.72                   | 54.00           | 4.28        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12890.000                | 39.46                 | 14.76           | 33.53                  | 29.80             | 50.49                   | 54.00           | 3.51        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 7          |
|      |                | Frequency  | TX 6685MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13370.000                | 40.77                 | 15.04           | 33.00                  | 26.91             | 49.73                   | 54.00           | 4.27        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13370.000                | 40.77                 | 15.04           | 33.00                  | 27.17             | 49.98                   | 54.00           | 4.02        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT40 | U-NII Band | 8          |
|      |                | Frequency  | TX 6885MHz |

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13770.000                | 41.07                 | 15.23           | 32.95                  | 26.98             | 50.33                   | 54.00           | 3.67        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13770.000                | 41.07                 | 15.23           | 32.95                  | 26.03             | 49.38                   | 54.00           | 4.62        | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 5          |
|      |                | Frequency  | TX 5985MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 29.83                   | 48.25                         | 54.00              | 5.75           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 11970.000                      | 39.16                       | 13.84                 | 34.58                  | 30.71                   | 49.13                         | 54.00              | 4.87           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 6          |
|      |                | Frequency  | TX 6545MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13090.000                      | 39.98                       | 14.91                 | 33.27                  | 28.03                   | 49.65                         | 54.00              | 4.35           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13090.000                      | 39.98                       | 14.91                 | 33.27                  | 27.87                   | 49.49                         | 54.00              | 4.51           | Peak     |

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 7          |
|      |                | Frequency  | TX 6625MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13250.000                      | 40.50                       | 14.99                 | 33.12                  | 27.72                   | 50.09                         | 54.00              | 3.91           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13250.000                      | 40.50                       | 14.99                 | 33.12                  | 27.13                   | 49.50                         | 54.00              | 4.50           | Peak     |

|      |                |            |            |
|------|----------------|------------|------------|
| Mode | 802.11be-EHT80 | U-NII Band | 8          |
|      |                | Frequency  | TX 6945MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14050.000                      | 41.75                       | 15.39                 | 33.05                  | 26.57                   | 50.65                         | 54.00              | 3.35           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 14050.000                      | 41.75                       | 15.39                 | 33.05                  | 25.73                   | 49.82                         | 54.00              | 4.18           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6025MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 30.25                   | 48.64                         | 54.00              | 5.36           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 12050.000                      | 39.00                       | 13.92                 | 34.54                  | 31.20                   | 49.59                         | 54.00              | 4.41           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 6          |
|      |                 | Frequency  | TX 6505MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 28.45                   | 49.79                         | 54.00              | 4.21           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13010.000                      | 39.82                       | 14.87                 | 33.35                  | 27.84                   | 49.18                         | 54.00              | 4.82           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6665MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 26.83                   | 49.54                         | 54.00              | 4.46           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13330.000                      | 40.73                       | 15.03                 | 33.04                  | 27.29                   | 50.00                         | 54.00              | 4.00           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT160 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6985MHz |

**Antenna at Horizontal Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 26.91                   | 50.81                         | 54.00              | 3.19           | Peak     |

**Antenna at Vertical Polarization**

| Emission<br>Frequency<br>(MHz) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain<br>(dB) | Read<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector |
|--------------------------------|-----------------------------|-----------------------|------------------------|-------------------------|-------------------------------|--------------------|----------------|----------|
| 13970.000                      | 41.58                       | 15.32                 | 32.99                  | 25.96                   | 49.87                         | 54.00              | 4.13           | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 5          |
|      |                 | Frequency  | TX 6425MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12850.000                | 39.30                 | 14.73           | 33.59                  | 30.75             | 51.18                   | 54.00           | 2.82        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 12850.000                | 39.30                 | 14.73           | 33.59                  | 29.91             | 50.34                   | 54.00           | 3.66        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 6          |
|      |                 | Frequency  | TX 6585MHz |

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13170.000                | 40.21                 | 14.95           | 33.19                  | 28.62             | 50.59                   | 54.00           | 3.41        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13170.000                | 40.21                 | 14.95           | 33.19                  | 28.95             | 50.91                   | 54.00           | 3.09        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 7          |
|      |                 | Frequency  | TX 6745MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13490.000                | 40.80                 | 15.10           | 32.89                  | 26.81             | 49.82                   | 54.00           | 4.18        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13490.000                | 40.80                 | 15.10           | 32.89                  | 27.63             | 50.64                   | 54.00           | 3.36        | Peak     |

|      |                 |            |            |
|------|-----------------|------------|------------|
| Mode | 802.11be-EHT320 | U-NII Band | 8          |
|      |                 | Frequency  | TX 6905MHz |

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13810.000                | 41.12                 | 15.25           | 32.95                  | 26.47             | 49.88                   | 54.00           | 4.12        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 13810.000                | 41.12                 | 15.25           | 32.95                  | 25.34             | 48.75                   | 54.00           | 5.25        | Peak     |

#### A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

## A.3 MAXIMUM POWER SPECTRAL DENSITY

|              |                               |            |               |
|--------------|-------------------------------|------------|---------------|
| Test Date    | 2024/11/25~30                 | Temp./Hum. | 23°C/52 ~ 55% |
| Cable Loss   | 4.47dB                        | Tested By  | Sam Chang     |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) |            |               |

### A.3.1 Power Spectral Density Result

#### ● OFDM Modulation

Antenna: INPAQ

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |         | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|---------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main    |                                   |                                         |                                                           |                 |
| 802.11ax-HE20   | 5          | 5955                   | -8.163                           | -8.100  | N/A                               | 1.50                                    | -3.62                                                     | -1              |
|                 |            | 6175                   | -8.586                           | -9.188  |                                   | 1.50                                    | -4.37                                                     |                 |
|                 |            | 6415                   | -7.992                           | -8.993  |                                   | 1.50                                    | -3.95                                                     |                 |
|                 | 6          | 6435                   | -7.822                           | -8.807  |                                   | 1.40                                    | -3.88                                                     |                 |
|                 |            | 6475                   | -8.087                           | -8.780  |                                   | 1.40                                    | -4.01                                                     |                 |
|                 |            | 6515                   | -7.843                           | -8.554  |                                   | 1.40                                    | -3.77                                                     |                 |
|                 | 7          | 6535                   | -7.638                           | -8.359  |                                   | 1.15                                    | -3.82                                                     |                 |
|                 |            | 6695                   | -8.420                           | -8.767  |                                   | 1.15                                    | -4.43                                                     |                 |
|                 |            | 6855                   | -8.454                           | -8.575  |                                   | 1.15                                    | -4.35                                                     |                 |
|                 | 8          | 6875                   | -8.363                           | -8.453  |                                   | 1.67                                    | -3.73                                                     |                 |
|                 |            | 6995                   | -7.849                           | -8.606  |                                   | 1.67                                    | -3.53                                                     |                 |
|                 |            | 7115                   | -16.553                          | -16.077 |                                   | 1.67                                    | -11.63                                                    |                 |
| 802.11ax-HE40   | 5          | 5965                   | -8.304                           | -8.364  | N/A                               | 1.50                                    | -3.82                                                     | -1              |
|                 |            | 6165                   | -8.546                           | -9.024  |                                   | 1.50                                    | -4.27                                                     |                 |
|                 |            | 6405                   | -8.020                           | -9.058  |                                   | 1.50                                    | -4.00                                                     |                 |
|                 | 6          | 6445                   | -8.087                           | -9.092  |                                   | 1.40                                    | -4.15                                                     |                 |
|                 |            | 6485                   | -8.051                           | -8.930  |                                   | 1.40                                    | -4.06                                                     |                 |
|                 | 7          | 6525                   | -8.162                           | -8.658  |                                   | 1.15                                    | -4.24                                                     |                 |
|                 |            | 6685                   | -8.430                           | -8.647  |                                   | 1.15                                    | -4.38                                                     |                 |
|                 |            | 6845                   | -8.373                           | -8.724  |                                   | 1.15                                    | -4.38                                                     |                 |
|                 | 8          | 6885                   | -8.396                           | -8.743  |                                   | 1.67                                    | -3.89                                                     |                 |
|                 |            | 7005                   | -8.077                           | -8.788  |                                   | 1.67                                    | -3.74                                                     |                 |
|                 |            | 7085                   | -8.354                           | -8.708  |                                   | 1.67                                    | -3.85                                                     |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{1.5/10} + 10^{1.5/10})/2] = 1.50$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.4/10} + 10^{1.4/10})/2] = 1.40$  dBi

6525~6875MHz: Directional gain =  $10 \log[(10^{1.0/10} + 10^{1.3/10})/2] = 1.15$  dBi

6875~7125MHz: Directional gain =  $10 \log[(10^{1.2/10} + 10^{2.1/10})/2] = 1.67$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |        | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|--------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main   |                                   |                                         |                                                           |                 |
| 802.11ax-HE80   | 5          | 5985                   | -8.743                           | -9.001 | N/A                               | 1.50                                    | -4.36                                                     | -1              |
|                 |            | 6145                   | -8.934                           | -9.276 |                                   | 1.50                                    | -4.59                                                     |                 |
|                 |            | 6385                   | -8.819                           | -9.386 |                                   | 1.50                                    | -4.58                                                     |                 |
|                 | 6          | 6465                   | -8.570                           | -9.732 |                                   | 1.40                                    | -4.70                                                     |                 |
|                 |            | 6545                   | -8.692                           | -9.194 |                                   | 1.40                                    | -4.53                                                     |                 |
|                 | 7          | 6625                   | -8.862                           | -8.992 |                                   | 1.15                                    | -4.77                                                     |                 |
|                 |            | 6705                   | -8.502                           | -9.086 |                                   | 1.15                                    | -4.62                                                     |                 |
|                 |            | 6785                   | -8.843                           | -8.994 |                                   | 1.15                                    | -4.76                                                     |                 |
|                 | 8          | 6865                   | -8.942                           | -9.471 |                                   | 1.67                                    | -4.52                                                     |                 |
|                 |            | 6945                   | -8.694                           | -9.391 |                                   | 1.67                                    | -4.35                                                     |                 |
|                 |            | 7025                   | -8.690                           | -9.185 |                                   | 1.67                                    | -4.25                                                     |                 |
| 802.11ax-HE160  | 5          | 6025                   | -9.097                           | -9.212 | N/A                               | 1.50                                    | -4.64                                                     |                 |
|                 |            | 6185                   | -9.562                           | -9.673 |                                   | 1.50                                    | -5.11                                                     |                 |
|                 |            | 6345                   | -9.551                           | -9.565 |                                   | 1.50                                    | -5.05                                                     |                 |
|                 | 6          | 6505                   | -9.383                           | -9.579 |                                   | 1.40                                    | -5.07                                                     |                 |
|                 |            | 6665                   | -9.385                           | -9.412 |                                   | 1.15                                    | -5.24                                                     |                 |
|                 | 7          | 6825                   | -9.318                           | -9.441 |                                   | 1.15                                    | -5.22                                                     |                 |
|                 |            | 6985                   | -9.223                           | -9.636 |                                   | 1.67                                    | -4.74                                                     |                 |
|                 | 8          |                        |                                  |        |                                   |                                         |                                                           |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{1.5/10} + 10^{1.5/10})/2] = 1.50$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.4/10} + 10^{1.4/10})/2] = 1.40$  dBi

6525~6875MHz: Directional gain =  $10 \log[(10^{1.0/10} + 10^{1.3/10})/2] = 1.15$  dBi

6875~7125MHz: Directional gain =  $10 \log[(10^{1.2/10} + 10^{2.1/10})/2] = 1.67$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |         | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|---------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main    |                                   |                                         |                                                           |                 |
| 802.11be-EHT20  | 5          | 5955                   | -7.843                           | -8.274  | N/A                               | 1.50                                    | -3.54                                                     | -1              |
|                 |            | 6175                   | -8.446                           | -9.069  |                                   | 1.50                                    | -4.24                                                     |                 |
|                 |            | 6415                   | -7.964                           | -9.111  |                                   | 1.50                                    | -3.99                                                     |                 |
|                 | 6          | 6435                   | -7.957                           | -9.235  |                                   | 1.40                                    | -4.14                                                     |                 |
|                 |            | 6475                   | -8.002                           | -8.877  |                                   | 1.40                                    | -4.01                                                     |                 |
|                 |            | 6515                   | -7.684                           | -8.677  |                                   | 1.40                                    | -3.74                                                     |                 |
|                 | 7          | 6535                   | -7.915                           | -8.756  |                                   | 1.15                                    | -4.15                                                     |                 |
|                 |            | 6695                   | -8.400                           | -8.928  |                                   | 1.15                                    | -4.50                                                     |                 |
|                 |            | 6855                   | -8.519                           | -8.664  |                                   | 1.15                                    | -4.43                                                     |                 |
|                 | 8          | 6875                   | -8.319                           | -8.558  |                                   | 1.67                                    | -3.76                                                     |                 |
|                 |            | 6995                   | -7.775                           | -8.592  |                                   | 1.67                                    | -3.48                                                     |                 |
|                 |            | 7115                   | -16.380                          | -16.335 |                                   | 1.67                                    | -11.68                                                    |                 |
| 802.11be-EHT40  | 5          | 5965                   | -8.273                           | -8.574  | N/A                               | 1.50                                    | -3.91                                                     | -1              |
|                 |            | 6165                   | -8.375                           | -9.291  |                                   | 1.50                                    | -4.30                                                     |                 |
|                 |            | 6405                   | -8.332                           | -9.368  |                                   | 1.50                                    | -4.31                                                     |                 |
|                 | 6          | 6445                   | -8.143                           | -9.259  |                                   | 1.40                                    | -4.25                                                     |                 |
|                 |            | 6485                   | -8.297                           | -9.236  |                                   | 1.40                                    | -4.33                                                     |                 |
|                 | 7          | 6525                   | -8.209                           | -9.025  |                                   | 1.15                                    | -4.44                                                     |                 |
|                 |            | 6685                   | -8.491                           | -9.046  |                                   | 1.15                                    | -4.60                                                     |                 |
|                 |            | 6845                   | -8.644                           | -8.947  |                                   | 1.15                                    | -4.63                                                     |                 |
|                 | 8          | 6885                   | -8.281                           | -8.951  |                                   | 1.67                                    | -3.92                                                     |                 |
|                 |            | 7005                   | -7.931                           | -8.825  |                                   | 1.67                                    | -3.67                                                     |                 |
|                 |            | 7085                   | -8.520                           | -8.666  |                                   | 1.67                                    | -3.91                                                     |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{1.5/10} + 10^{1.5/10})/2] = 1.50$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.4/10} + 10^{1.4/10})/2] = 1.40$  dBi

6525~6875MHz: Directional gain =  $10 \log[(10^{1.0/10} + 10^{1.3/10})/2] = 1.15$  dBi

6875~7125MHz: Directional gain =  $10 \log[(10^{1.2/10} + 10^{2.1/10})/2] = 1.67$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |         | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|---------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main    |                                   |                                         |                                                           |                 |
| 802.11be-EHT80  | 5          | 5985                   | -8.666                           | -8.626  | N/A                               | 1.50                                    | -4.14                                                     | -1              |
|                 |            | 6145                   | -8.861                           | -9.432  |                                   | 1.50                                    | -4.63                                                     |                 |
|                 |            | 6385                   | -8.497                           | -9.386  |                                   | 1.50                                    | -4.41                                                     |                 |
|                 | 6          | 6465                   | -8.684                           | -9.580  |                                   | 1.40                                    | -4.70                                                     |                 |
|                 |            | 6545                   | -8.619                           | -9.322  |                                   | 1.40                                    | -4.55                                                     |                 |
|                 |            | 6625                   | -8.763                           | -9.036  |                                   | 1.15                                    | -4.74                                                     |                 |
|                 | 7          | 6705                   | -9.058                           | -9.596  |                                   | 1.15                                    | -5.16                                                     |                 |
|                 |            | 6785                   | -8.761                           | -9.318  |                                   | 1.15                                    | -4.87                                                     |                 |
|                 | 8          | 6865                   | -8.954                           | -9.492  |                                   | 1.67                                    | -4.53                                                     |                 |
|                 |            | 6945                   | -8.570                           | -9.489  |                                   | 1.67                                    | -4.32                                                     |                 |
|                 |            | 7025                   | -8.751                           | -9.233  |                                   | 1.67                                    | -4.31                                                     |                 |
| 802.11be-EHT160 | 5          | 6025                   | -9.252                           | -9.493  | N/A                               | 1.50                                    | -4.86                                                     | -1              |
|                 |            | 6185                   | -9.357                           | -9.871  |                                   | 1.50                                    | -5.10                                                     |                 |
|                 |            | 6345                   | -9.401                           | -9.397  |                                   | 1.50                                    | -4.89                                                     |                 |
|                 | 6          | 6505                   | -9.339                           | -9.299  |                                   | 1.40                                    | -4.91                                                     |                 |
|                 |            | 6665                   | -8.681                           | -8.946  |                                   | 1.15                                    | -4.65                                                     |                 |
|                 |            | 6825                   | -9.367                           | -9.342  |                                   | 1.15                                    | -5.19                                                     |                 |
|                 | 8          | 6985                   | -9.188                           | -9.464  |                                   | 1.67                                    | -4.64                                                     |                 |
|                 |            |                        |                                  |         |                                   |                                         |                                                           |                 |
| 802.11be-EHT320 | 5          | 6105                   | -8.747                           | -9.101  | N/A                               | 1.50                                    | -4.41                                                     | -1              |
|                 |            | 6265                   | -9.032                           | -9.185  |                                   | 1.50                                    | -4.60                                                     |                 |
|                 |            | 6425                   | -8.612                           | -9.243  |                                   | 1.50                                    | -4.41                                                     |                 |
|                 | 6          | 6585                   | -8.632                           | -8.710  |                                   | 1.40                                    | -4.26                                                     |                 |
|                 |            | 6745                   | -8.656                           | -8.896  |                                   | 1.15                                    | -4.61                                                     |                 |
|                 |            | 6905                   | -9.939                           | -10.196 |                                   | 1.67                                    | -5.39                                                     |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$5925\sim6425\text{MHz: Directional gain} = 10 \log[(10^{1.5/10} + 10^{1.5/10})/2] = 1.50\text{dBi}$$

$$6425\sim6525\text{MHz: Directional gain} = 10 \log[(10^{1.4/10} + 10^{1.4/10})/2] = 1.40\text{dBi}$$

$$6525\sim6875\text{MHz: Directional gain} = 10 \log[(10^{1.0/10} + 10^{1.3/10})/2] = 1.15\text{dBi}$$

$$6875\sim7125\text{MHz: Directional gain} = 10 \log[(10^{1.2/10} + 10^{2.1/10})/2] = 1.67\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

### Antenna: LUXSHARE-ICT

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |         | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|---------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main    |                                   |                                         |                                                           |                 |
| 802.11ax-HE20   | 5          | 5955                   | -8.163                           | -8.100  | N/A                               | 2.75                                    | -2.37                                                     | -1              |
|                 |            | 6175                   | -8.586                           | -9.188  |                                   | 2.75                                    | -3.12                                                     |                 |
|                 |            | 6415                   | -7.992                           | -8.993  |                                   | 2.75                                    | -2.70                                                     |                 |
|                 | 6          | 6435                   | -7.822                           | -8.807  |                                   | 1.65                                    | -3.63                                                     |                 |
|                 |            | 6475                   | -8.087                           | -8.780  |                                   | 1.65                                    | -3.76                                                     |                 |
|                 |            | 6515                   | -7.843                           | -8.554  |                                   | 1.65                                    | -3.52                                                     |                 |
|                 | 7          | 6535                   | -7.638                           | -8.359  |                                   | 0.87                                    | -4.10                                                     |                 |
|                 |            | 6695                   | -8.420                           | -8.767  |                                   | 0.87                                    | -4.71                                                     |                 |
|                 |            | 6855                   | -8.454                           | -8.575  |                                   | 0.87                                    | -4.63                                                     |                 |
|                 | 8          | 6875                   | -8.363                           | -8.453  |                                   | -1.89                                   | -7.29                                                     |                 |
|                 |            | 6995                   | -7.849                           | -8.606  |                                   | -1.89                                   | -7.09                                                     |                 |
|                 |            | 7115                   | -16.553                          | -16.077 |                                   | -1.89                                   | -15.19                                                    |                 |
| 802.11ax-HE40   | 5          | 5965                   | -8.304                           | -8.364  | N/A                               | 2.75                                    | -2.57                                                     | -1              |
|                 |            | 6165                   | -8.546                           | -9.024  |                                   | 2.75                                    | -3.02                                                     |                 |
|                 |            | 6405                   | -8.020                           | -9.058  |                                   | 2.75                                    | -2.75                                                     |                 |
|                 | 6          | 6445                   | -8.087                           | -9.092  |                                   | 1.65                                    | -3.90                                                     |                 |
|                 |            | 6485                   | -8.051                           | -8.930  |                                   | 1.65                                    | -3.81                                                     |                 |
|                 | 7          | 6525                   | -8.162                           | -8.658  |                                   | 0.87                                    | -4.52                                                     |                 |
|                 |            | 6685                   | -8.430                           | -8.647  |                                   | 0.87                                    | -4.66                                                     |                 |
|                 |            | 6845                   | -8.373                           | -8.724  |                                   | 0.87                                    | -4.66                                                     |                 |
|                 | 8          | 6885                   | -8.396                           | -8.743  |                                   | -1.89                                   | -7.45                                                     |                 |
|                 |            | 7005                   | -8.077                           | -8.788  |                                   | -1.89                                   | -7.30                                                     |                 |
|                 |            | 7085                   | -8.354                           | -8.708  |                                   | -1.89                                   | -7.41                                                     |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{2.7/10} + 10^{2.8/10})/2]$  = 2.75dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.7/10} + 10^{1.6/10})/2]$  = 1.65dBi

6525~6825MHz: Directional gain =  $10 \log[(10^{0.4/10} + 10^{1.3/10})/2]$  = 0.87dBi

6825~7125MHz: Directional gain =  $10 \log[(10^{-1.2/10} + 10^{-2.7/10})/2]$  = -1.89dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |        | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|--------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main   |                                   |                                         |                                                           |                 |
| 802.11ax-HE80   | 5          | 5985                   | -8.743                           | -9.001 | N/A                               | 2.75                                    | -3.11                                                     | -1              |
|                 |            | 6145                   | -8.934                           | -9.276 |                                   | 2.75                                    | -3.34                                                     |                 |
|                 |            | 6385                   | -8.819                           | -9.386 |                                   | 2.75                                    | -3.33                                                     |                 |
|                 | 6          | 6465                   | -8.570                           | -9.732 |                                   | 1.65                                    | -4.45                                                     |                 |
|                 |            | 6545                   | -8.692                           | -9.194 |                                   | 1.65                                    | -4.28                                                     |                 |
|                 | 7          | 6625                   | -8.862                           | -8.992 |                                   | 0.87                                    | -5.05                                                     |                 |
|                 |            | 6705                   | -8.502                           | -9.086 |                                   | 0.87                                    | -4.90                                                     |                 |
|                 |            | 6785                   | -8.843                           | -8.994 |                                   | 0.87                                    | -5.04                                                     |                 |
|                 | 8          | 6865                   | -8.942                           | -9.471 |                                   | -1.89                                   | -8.08                                                     |                 |
|                 |            | 6945                   | -8.694                           | -9.391 |                                   | -1.89                                   | -7.91                                                     |                 |
|                 |            | 7025                   | -8.690                           | -9.185 |                                   | -1.89                                   | -7.81                                                     |                 |
| 802.11ax-HE160  | 5          | 6025                   | -9.097                           | -9.212 | N/A                               | 2.75                                    | -3.39                                                     |                 |
|                 |            | 6185                   | -9.562                           | -9.673 |                                   | 2.75                                    | -3.86                                                     |                 |
|                 |            | 6345                   | -9.551                           | -9.565 |                                   | 2.75                                    | -3.80                                                     |                 |
|                 | 6          | 6505                   | -9.383                           | -9.579 |                                   | 1.65                                    | -4.82                                                     |                 |
|                 |            | 6665                   | -9.385                           | -9.412 |                                   | 0.87                                    | -5.52                                                     |                 |
|                 | 7          | 6825                   | -9.318                           | -9.441 |                                   | 0.87                                    | -5.50                                                     |                 |
|                 |            | 6985                   | -9.223                           | -9.636 |                                   | -1.89                                   | -8.30                                                     |                 |
|                 | 8          |                        |                                  |        |                                   |                                         |                                                           |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{2.7/10} + 10^{2.8/10})/2] = 2.75$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.7/10} + 10^{1.6/10})/2] = 1.65$  dBi

6525~6825MHz: Directional gain =  $10 \log[(10^{0.4/10} + 10^{1.3/10})/2] = 0.87$  dBi

6825~7125MHz: Directional gain =  $10 \log[(10^{-1.2/10} + 10^{-2.7/10})/2] = -1.89$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |         | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|---------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main    |                                   |                                         |                                                           |                 |
| 802.11be-EHT20  | 5          | 5955                   | -7.843                           | -8.274  | N/A                               | 2.75                                    | -2.29                                                     | -1              |
|                 |            | 6175                   | -8.446                           | -9.069  |                                   | 2.75                                    | -2.99                                                     |                 |
|                 |            | 6415                   | -7.964                           | -9.111  |                                   | 2.75                                    | -2.74                                                     |                 |
|                 | 6          | 6435                   | -7.957                           | -9.235  |                                   | 1.65                                    | -3.89                                                     |                 |
|                 |            | 6475                   | -8.002                           | -8.877  |                                   | 1.65                                    | -3.76                                                     |                 |
|                 |            | 6515                   | -7.684                           | -8.677  |                                   | 1.65                                    | -3.49                                                     |                 |
|                 | 7          | 6535                   | -7.915                           | -8.756  |                                   | 0.87                                    | -4.43                                                     |                 |
|                 |            | 6695                   | -8.400                           | -8.928  |                                   | 0.87                                    | -4.78                                                     |                 |
|                 |            | 6855                   | -8.519                           | -8.664  |                                   | -1.89                                   | -7.47                                                     |                 |
|                 | 8          | 6875                   | -8.319                           | -8.558  |                                   | -1.89                                   | -7.32                                                     |                 |
|                 |            | 6995                   | -7.775                           | -8.592  |                                   | -1.89                                   | -7.04                                                     |                 |
|                 |            | 7115                   | -16.380                          | -16.335 |                                   | -1.89                                   | -15.24                                                    |                 |
| 802.11be-EHT40  | 5          | 5965                   | -8.273                           | -8.574  | N/A                               | 2.75                                    | -2.66                                                     | -1              |
|                 |            | 6165                   | -8.375                           | -9.291  |                                   | 2.75                                    | -3.05                                                     |                 |
|                 |            | 6405                   | -8.332                           | -9.368  |                                   | 2.75                                    | -3.06                                                     |                 |
|                 | 6          | 6445                   | -8.143                           | -9.259  |                                   | 1.65                                    | -4.00                                                     |                 |
|                 |            | 6485                   | -8.297                           | -9.236  |                                   | 1.65                                    | -4.08                                                     |                 |
|                 | 7          | 6525                   | -8.209                           | -9.025  |                                   | 1.65                                    | -3.94                                                     |                 |
|                 |            | 6685                   | -8.491                           | -9.046  |                                   | 0.87                                    | -4.88                                                     |                 |
|                 |            | 6845                   | -8.644                           | -8.947  |                                   | -1.89                                   | -7.67                                                     |                 |
|                 | 8          | 6885                   | -8.281                           | -8.951  |                                   | -1.89                                   | -7.48                                                     |                 |
|                 |            | 7005                   | -7.931                           | -8.825  |                                   | -1.89                                   | -7.23                                                     |                 |
|                 |            | 7085                   | -8.520                           | -8.666  |                                   | -1.89                                   | -7.47                                                     |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{2.7/10} + 10^{2.8/10})/2] = 2.75$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.7/10} + 10^{1.6/10})/2] = 1.65$  dBi

6525~6825MHz: Directional gain =  $10 \log[(10^{0.4/10} + 10^{1.3/10})/2] = 0.87$  dBi

6825~7125MHz: Directional gain =  $10 \log[(10^{-1.2/10} + 10^{-2.7/10})/2] = -1.89$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

| Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |        | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) <sup>Note3</sup> | Total Power Spectral Density (dBm/1MHz) <sup>Note 2</sup> | Limit (dBm/MHz) |
|-----------------|------------|------------------------|----------------------------------|--------|-----------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------|
|                 |            |                        | AUX                              | Main   |                                   |                                         |                                                           |                 |
| 802.11be-EHT80  | 5          | 5985                   | -8.67                            | -8.63  | N/A                               | 2.75                                    | -2.89                                                     | -1              |
|                 |            | 6145                   | -8.86                            | -9.43  |                                   | 2.75                                    | -3.38                                                     |                 |
|                 |            | 6385                   | -8.50                            | -9.39  |                                   | 2.75                                    | -3.16                                                     |                 |
|                 | 6          | 6465                   | -8.68                            | -9.58  |                                   | 1.65                                    | -4.45                                                     |                 |
|                 |            | 6545                   | -8.62                            | -9.32  |                                   | 0.87                                    | -5.08                                                     |                 |
|                 |            | 6625                   | -8.76                            | -9.04  |                                   | 0.87                                    | -5.02                                                     |                 |
|                 | 7          | 6705                   | -9.06                            | -9.60  |                                   | 0.87                                    | -5.44                                                     |                 |
|                 |            | 6785                   | -8.76                            | -9.32  |                                   | 0.87                                    | -5.15                                                     |                 |
|                 | 8          | 6865                   | -8.95                            | -9.49  |                                   | -1.89                                   | -8.09                                                     |                 |
|                 |            | 6945                   | -8.57                            | -9.49  |                                   | -1.89                                   | -7.88                                                     |                 |
|                 |            | 7025                   | -8.75                            | -9.23  |                                   | -1.89                                   | -7.87                                                     |                 |
| 802.11be-EHT160 | 5          | 6025                   | -9.25                            | -9.49  | N/A                               | 2.75                                    | -3.61                                                     | -1              |
|                 |            | 6185                   | -9.36                            | -9.87  |                                   | 2.75                                    | -3.85                                                     |                 |
|                 |            | 6345                   | -9.40                            | -9.40  |                                   | 2.75                                    | -3.64                                                     |                 |
|                 | 6          | 6505                   | -9.34                            | -9.30  |                                   | 1.65                                    | -4.66                                                     |                 |
|                 |            | 6665                   | -8.68                            | -8.95  |                                   | 0.87                                    | -4.93                                                     |                 |
|                 |            | 6825                   | -9.37                            | -9.34  |                                   | 0.87                                    | -5.47                                                     |                 |
|                 | 8          | 6985                   | -9.19                            | -9.46  |                                   | -1.89                                   | -8.20                                                     |                 |
|                 |            | 7125                   | -9.19                            | -9.46  |                                   | -1.89                                   | -8.20                                                     |                 |
| 802.11be-EHT320 | 5          | 6105                   | -8.75                            | -9.10  | N/A                               | 2.75                                    | -3.16                                                     | -1              |
|                 |            | 6265                   | -9.03                            | -9.19  |                                   | 2.75                                    | -3.35                                                     |                 |
|                 |            | 6425                   | -8.61                            | -9.24  |                                   | 2.75                                    | -3.16                                                     |                 |
|                 | 6          | 6585                   | -8.63                            | -8.71  |                                   | 0.87                                    | -4.79                                                     |                 |
|                 |            | 6745                   | -8.66                            | -8.90  |                                   | 0.87                                    | -4.89                                                     |                 |
|                 |            | 6905                   | -9.94                            | -10.20 |                                   | -1.89                                   | -8.95                                                     |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$5925\sim6425\text{MHz: Directional gain} = 10 \log[(10^{2.7/10} + 10^{2.8/10})/2] = 2.75\text{dBi}$$

$$6425\sim6525\text{MHz: Directional gain} = 10 \log[(10^{1.7/10} + 10^{1.6/10})/2] = 1.65\text{dBi}$$

$$6525\sim6825\text{MHz: Directional gain} = 10 \log[(10^{0.4/10} + 10^{1.3/10})/2] = 0.87\text{dBi}$$

$$6825\sim7125\text{MHz: Directional gain} = 10 \log[(10^{-1.2/10} + 10^{-2.7/10})/2] = -1.89\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

## ● OFDMA Modulation

### Antenna: INPAQ

| Tones | RU Index | Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |        | Duty Cycle Factor (dB)<br>10log(1/X) | Directional Gain (dBi)<br>Note3 | Total Power Spectral Density (dBm/1MHz)<br>Note 2 | Limit (dBm/MHz) |
|-------|----------|-----------------|------------|------------------------|----------------------------------|--------|--------------------------------------|---------------------------------|---------------------------------------------------|-----------------|
|       |          |                 |            |                        | AUX                              | Main   |                                      |                                 |                                                   |                 |
| 26T   | 18       | 802.11ax-HE80   | 7          | 6625                   | -7.180                           | -6.683 | N/A                                  | 1.15                            | -2.76                                             | -1              |
| 52T   | 44       | 802.11ax-HE80   | 8          | 6945                   | -8.494                           | -8.863 | N/A                                  | 1.67                            | -3.99                                             |                 |
| 106T  | 60       | 802.11ax-HE80   | 8          | 7025                   | -8.893                           | -8.747 | N/A                                  | 1.67                            | -4.14                                             |                 |
| 242T  | 62       | 802.11ax-HE80   | 8          | 6865                   | -8.313                           | -8.922 | N/A                                  | 1.15                            | -4.45                                             |                 |
| 484T  | 65       | 802.11ax-HE80   | 8          | 6865                   | -8.878                           | -9.259 | N/A                                  | 1.15                            | -4.90                                             |                 |
| 996T  | 67       | 802.11ax-HE80   | 5          | 5985                   | -8.799                           | -8.632 | N/A                                  | 1.50                            | -4.20                                             |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{1.5/10} + 10^{1.5/10})/2] = 1.50$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.4/10} + 10^{1.4/10})/2] = 1.40$  dBi

6525~6875MHz: Directional gain =  $10 \log[(10^{1.0/10} + 10^{1.3/10})/2] = 1.15$  dBi

6875~7125MHz: Directional gain =  $10 \log[(10^{1.2/10} + 10^{2.1/10})/2] = 1.67$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

| Tones       | RU Index | Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |        | Duty Cycle Factor (dB)<br>10log(1/X) | Directional Gain (dBi)<br>Note3 | Total Power Spectral Density (dBm/1MHz)<br>Note 2 | Limit (dBm/MHz) |
|-------------|----------|-----------------|------------|------------------------|----------------------------------|--------|--------------------------------------|---------------------------------|---------------------------------------------------|-----------------|
|             |          |                 |            |                        | AUX                              | Main   |                                      |                                 |                                                   |                 |
| 26          | T19      | 802.11be-EHT320 | 6          | 6585                   | -8.965                           | -9.394 | N/A                                  | 1.15                            | -5.01                                             | -1              |
| 52          | 37       | 802.11be-EHT40  | 8          | 6885                   | -8.755                           | -8.996 | N/A                                  | 1.67                            | -4.19                                             |                 |
| 106         | 56       | 802.11be-EHT40  | 8          | 6885                   | -8.592                           | -9.137 | N/A                                  | 1.67                            | -4.18                                             |                 |
| 242         | 64       | 802.11be-EHT80  | 7          | 6625                   | -8.546                           | -8.677 | N/A                                  | 1.15                            | -4.45                                             |                 |
| 484         | 65       | 802.11be-EHT80  | 8          | 6865                   | -8.834                           | -9.138 | N/A                                  | 1.67                            | -4.30                                             |                 |
| 996         | 67       | 802.11be-EHT80  | 5          | 5985                   | -8.541                           | -8.701 | N/A                                  | 1.50                            | -4.11                                             |                 |
| 996x2       | W68      | 802.11be-EHT320 | 6          | 6585                   | -8.935                           | -8.93  | N/A                                  | 1.15                            | -4.77                                             |                 |
| 26+52       | 72       | 802.11be-EHT20  | 8          | 6875                   | -8.578                           | -9.125 | N/A                                  | 1.67                            | -4.16                                             |                 |
| 26+52       | 70       | 802.11be-EHT40  | 8          | 6885                   | -8.42                            | -9.053 | N/A                                  | 1.67                            | -4.04                                             |                 |
| 26+106      | 83       | 802.11be-EHT20  | 8          | 6875                   | -8.593                           | -8.728 | N/A                                  | 1.67                            | -3.98                                             |                 |
| 26+106      | 82       | 802.11be-EHT40  | 8          | 6885                   | -8.465                           | -8.986 | N/A                                  | 1.67                            | -4.04                                             |                 |
| 484+242     | 92       | 802.11be-EHT80  | 5          | 5985                   | -8.551                           | -8.405 | N/A                                  | 1.50                            | -3.97                                             |                 |
| 996+484     | 95       | 802.11be-EHT160 | 8          | 6985                   | -9.34                            | -9.316 | N/A                                  | 1.67                            | -4.65                                             |                 |
| 996+484+242 | S97      | 802.11be-EHT160 | 5          | 6025                   | -8.579                           | -8.945 | N/A                                  | 1.50                            | -4.25                                             |                 |
| 996x2+484   | W103     | 802.11be-EHT320 | 8          | 6905                   | -8.609                           | -8.393 | N/A                                  | 1.67                            | -3.82                                             |                 |
| 996x3       | W104     | 802.11be-EHT320 | 5          | 6265                   | -8.678                           | -8.763 | N/A                                  | 1.50                            | -4.21                                             |                 |
| 996x3+484   | W106     | 802.11be-EHT320 | 5          | 6105                   | -8.828                           | -9.035 | N/A                                  | 1.50                            | -4.42                                             |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{1.5/10} + 10^{1.5/10})/2] = 1.50$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.4/10} + 10^{1.4/10})/2] = 1.40$  dBi

6525~6875MHz: Directional gain =  $10 \log[(10^{1.0/10} + 10^{1.3/10})/2] = 1.15$  dBi

6875~7125MHz: Directional gain =  $10 \log[(10^{1.2/10} + 10^{2.1/10})/2] = 1.67$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

### Antenna: LUXSHARE-ICT

| Tones | RU Index | Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |       | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) Note3 | Total Power Spectral Density (dBm/1MHz) Note 2 | Limit (dBm/MHz) |
|-------|----------|-----------------|------------|------------------------|----------------------------------|-------|-----------------------------------|------------------------------|------------------------------------------------|-----------------|
|       |          |                 |            |                        | AUX                              | Main  |                                   |                              |                                                |                 |
| 26T   | 18       | 802.11ax-HE80   | 5          | 5985                   | -7.42                            | -7.92 | N/A                               | 2.75                         | -1.90                                          | -1              |
| 52T   | 52       | 802.11ax-HE160  | 5          | 6025                   | -8.65                            | -8.95 | N/A                               | 2.75                         | -3.04                                          |                 |
| 106T  | 53       | 802.11ax-HE40   | 5          | 5965                   | -8.25                            | -8.38 | N/A                               | 2.75                         | -2.55                                          |                 |
| 242T  | 62       | 802.11ax-HE160  | 5          | 6025                   | -8.51                            | -8.42 | N/A                               | 2.75                         | -2.70                                          |                 |
| 484T  | 65       | 802.11ax-HE40   | 5          | 5965                   | -8.27                            | -8.37 | N/A                               | 2.75                         | -2.56                                          |                 |
| 996T  | 67       | 802.11ax-HE80   | 5          | 5985                   | -8.80                            | -8.63 | N/A                               | 2.75                         | -2.95                                          |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{2.7/10} + 10^{2.8/10})/2] = 2.75$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.7/10} + 10^{1.6/10})/2] = 1.65$  dBi

6525~6825MHz: Directional gain =  $10 \log[(10^{0.4/10} + 10^{1.3/10})/2] = 0.87$  dBi

6825~7125MHz: Directional gain =  $10 \log[(10^{-1.2/10} + 10^{-2.7/10})/2] = -1.89$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented max result (worst case) plots for each test mode.

| Tones       | RU Index | Modulation Type | U-NII Band | Centre Frequency (MHz) | Power Spectral Density (dBm/MHz) |       | Duty Cycle Factor (dB) 10log(1/X) | Directional Gain (dBi) Note3 | Total Power Spectral Density (dBm/1MHz) Note 2 | Limit (dBm/MHz) |
|-------------|----------|-----------------|------------|------------------------|----------------------------------|-------|-----------------------------------|------------------------------|------------------------------------------------|-----------------|
|             |          |                 |            |                        | AUX                              | Main  |                                   |                              |                                                |                 |
| 26          | W36      | 802.11be-EHT320 | 5          | 6425                   | -8.81                            | -8.78 | N/A                               | 2.75                         | -3.03                                          | -1              |
| 52          | S37      | 802.11be-EHT160 | 5          | 6025                   | -9.40                            | -8.62 | N/A                               | 2.75                         | -3.23                                          |                 |
| 106         | 53       | 802.11be-EHT40  | 5          | 5965                   | -8.41                            | -8.33 | N/A                               | 2.75                         | -2.61                                          |                 |
| 242         | 62       | 802.11be-EHT320 | 5          | 6105                   | -8.91                            | -8.62 | N/A                               | 2.75                         | -3.00                                          |                 |
| 484         | 65       | 802.11be-EHT80  | 5          | 5985                   | -8.51                            | -8.39 | N/A                               | 2.75                         | -2.69                                          |                 |
| 996         | 67       | 802.11be-EHT80  | 5          | 5985                   | -8.54                            | -8.70 | N/A                               | 2.75                         | -2.86                                          |                 |
| 996x2       | W68      | 802.11be-EHT320 | 5          | 6425                   | -8.92                            | -9.05 | N/A                               | 2.75                         | -3.22                                          |                 |
| 26+52       | 72       | 802.11be-EHT20  | 5          | 5955                   | -8.09                            | -8.36 | N/A                               | 2.75                         | -2.46                                          |                 |
| 26+52       | 70       | 802.11be-EHT40  | 5          | 5965                   | -8.35                            | -8.43 | N/A                               | 2.75                         | -2.63                                          |                 |
| 26+106      | 82       | 802.11be-EHT20  | 5          | 5955                   | -8.13                            | -8.19 | N/A                               | 2.75                         | -2.40                                          |                 |
| 26+106      | 85       | 802.11be-EHT40  | 5          | 5965                   | -8.27                            | -8.31 | N/A                               | 2.75                         | -2.53                                          |                 |
| 484+242     | 92       | 802.11be-EHT80  | 5          | 5985                   | -8.55                            | -8.41 | N/A                               | 2.75                         | -2.72                                          |                 |
| 996+484     | 94       | 802.11be-EHT160 | 5          | 6025                   | -8.68                            | -9.22 | N/A                               | 2.75                         | -3.18                                          |                 |
| 996+484+242 | S97      | 802.11be-EHT160 | 5          | 6025                   | -8.58                            | -8.95 | N/A                               | 2.75                         | -3.00                                          |                 |
| 996x2+484   | W103     | 802.11be-EHT320 | 5          | 6425                   | -8.35                            | -8.66 | N/A                               | 2.75                         | -2.74                                          |                 |
| 996x3       | W104     | 802.11be-EHT320 | 5          | 6265                   | -8.68                            | -8.76 | N/A                               | 2.75                         | -2.96                                          |                 |
| 996x3+484   | W106     | 802.11be-EHT320 | 5          | 6105                   | -8.83                            | -9.04 | N/A                               | 2.75                         | -3.17                                          |                 |

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$  dBi

5925~6425MHz: Directional gain =  $10 \log[(10^{2.7/10} + 10^{2.8/10})/2] = 2.75$  dBi

6425~6525MHz: Directional gain =  $10 \log[(10^{1.7/10} + 10^{1.6/10})/2] = 1.65$  dBi

6525~6825MHz: Directional gain =  $10 \log[(10^{0.4/10} + 10^{1.3/10})/2] = 0.87$  dBi

6825~7125MHz: Directional gain =  $10 \log[(10^{-1.2/10} + 10^{-2.7/10})/2] = -1.89$  dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).


4. We only presented max result (worst case) plots for each test mode.

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**


### A.3.2 Measurement Plots

#### ● OFDM Modulation

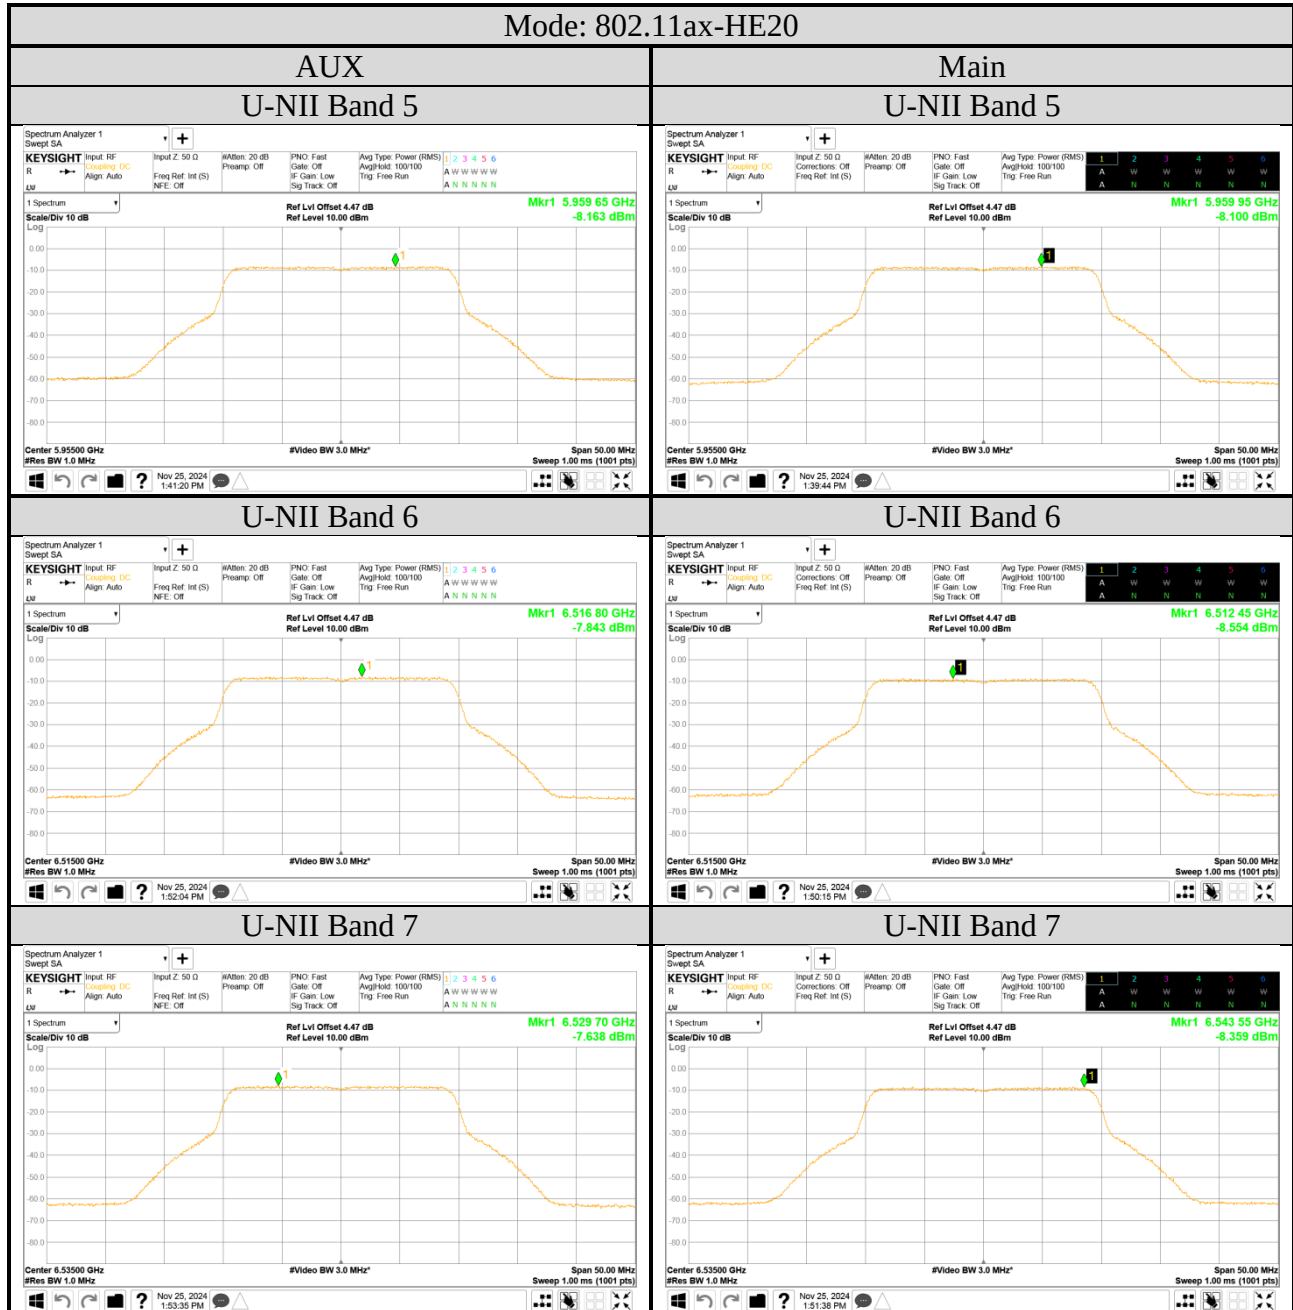


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

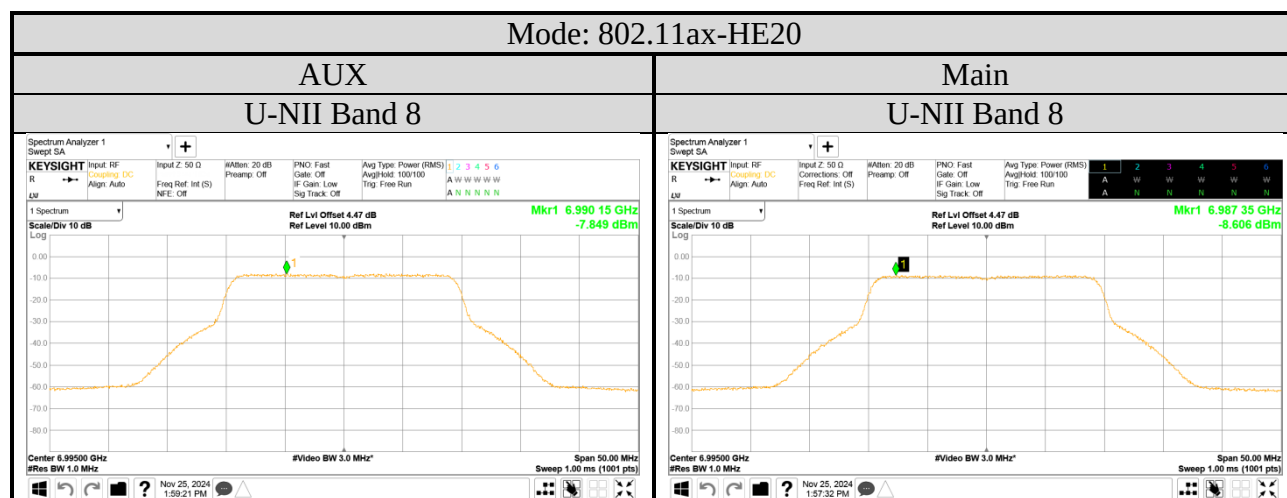


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

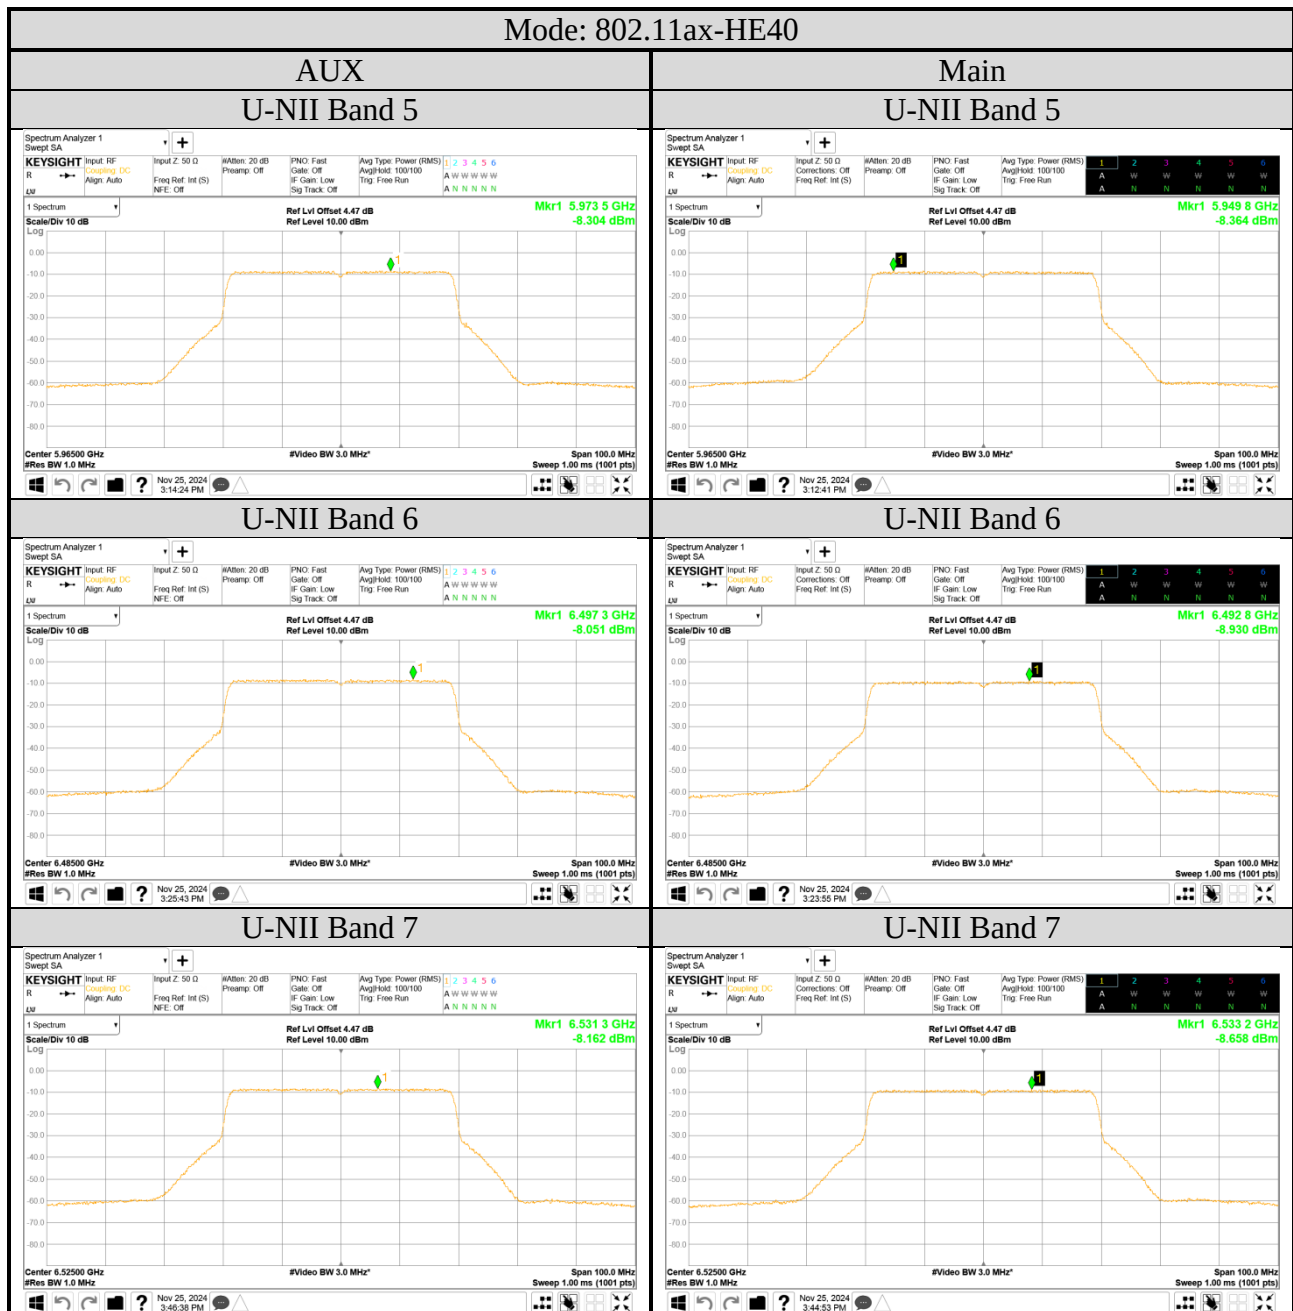


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

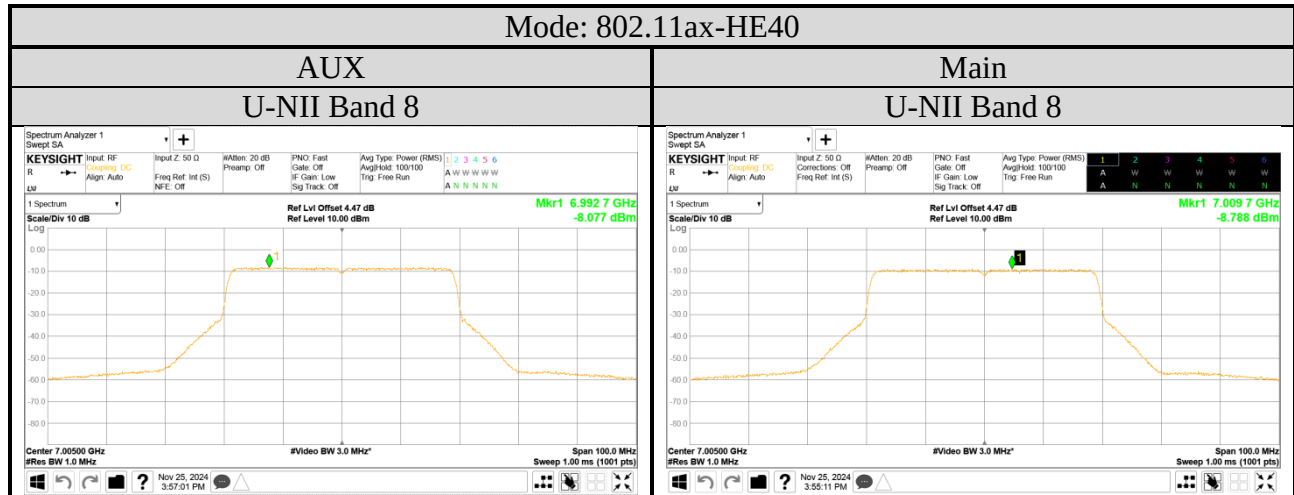


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

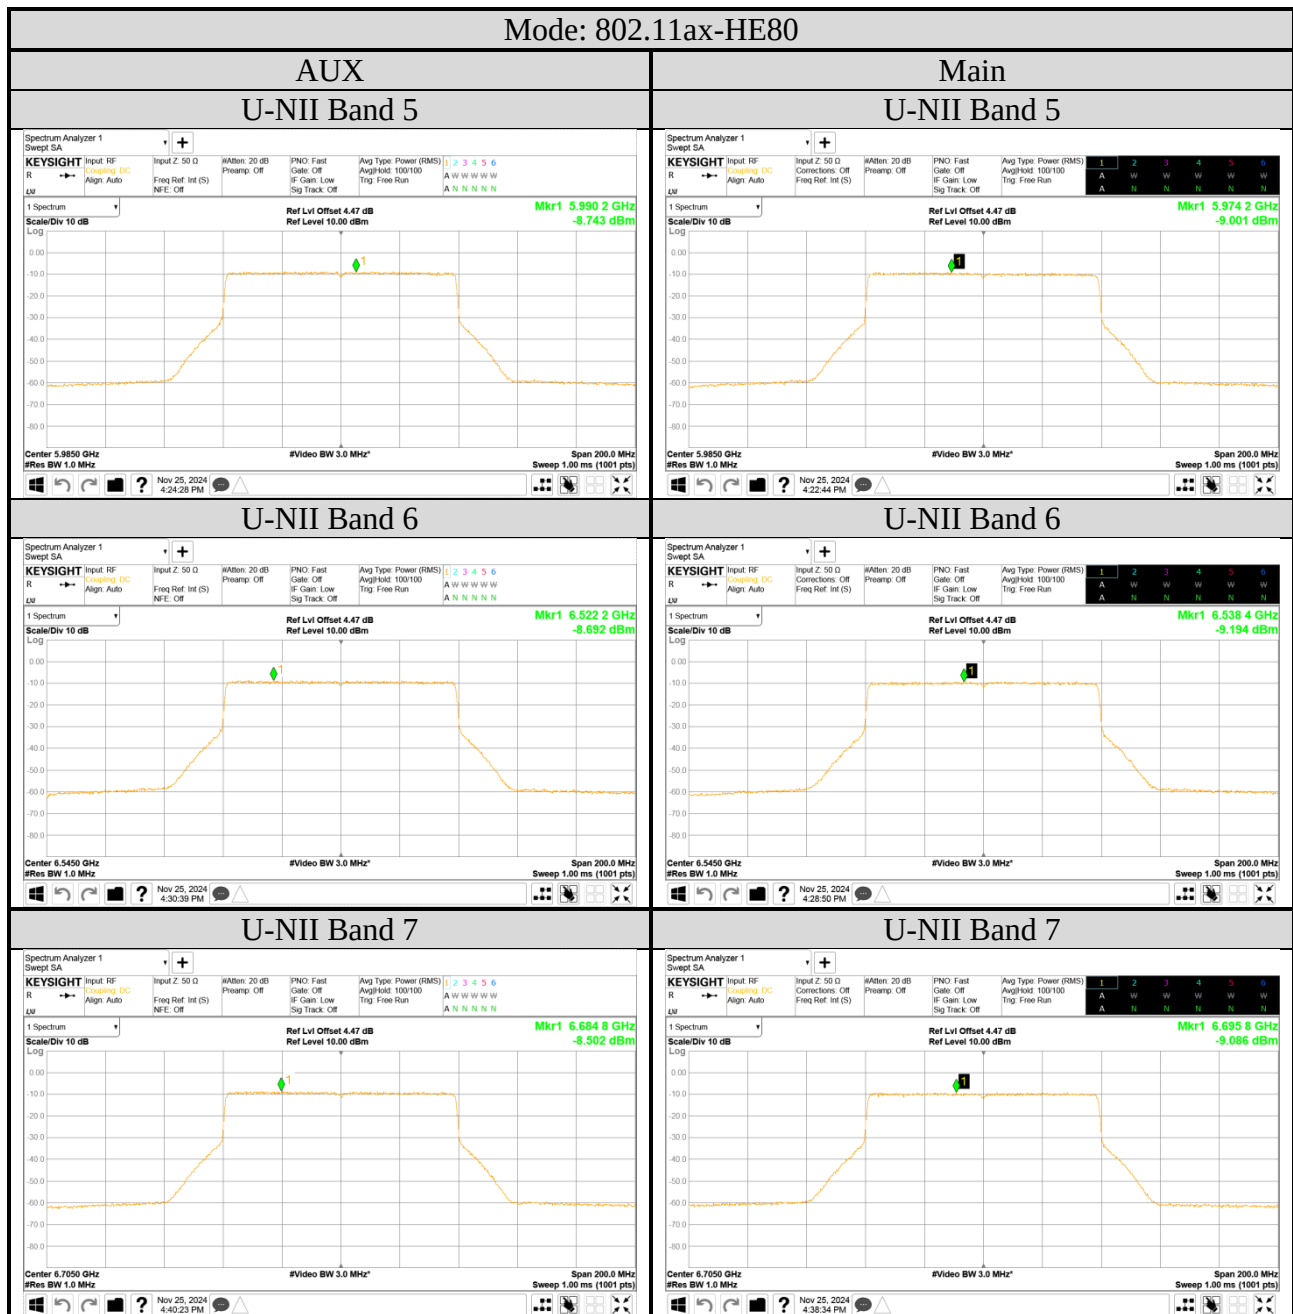


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

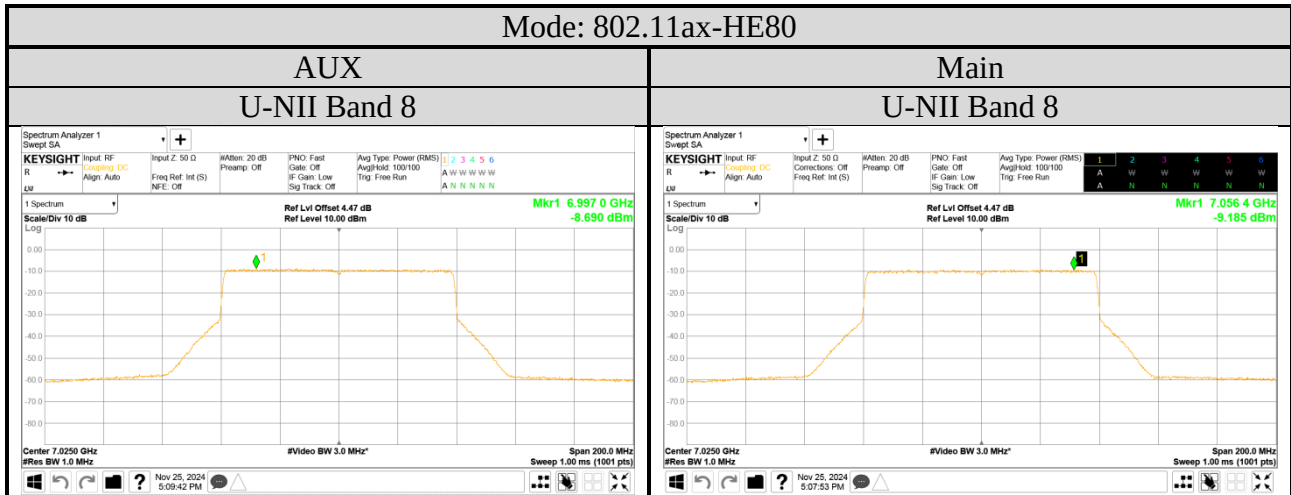


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

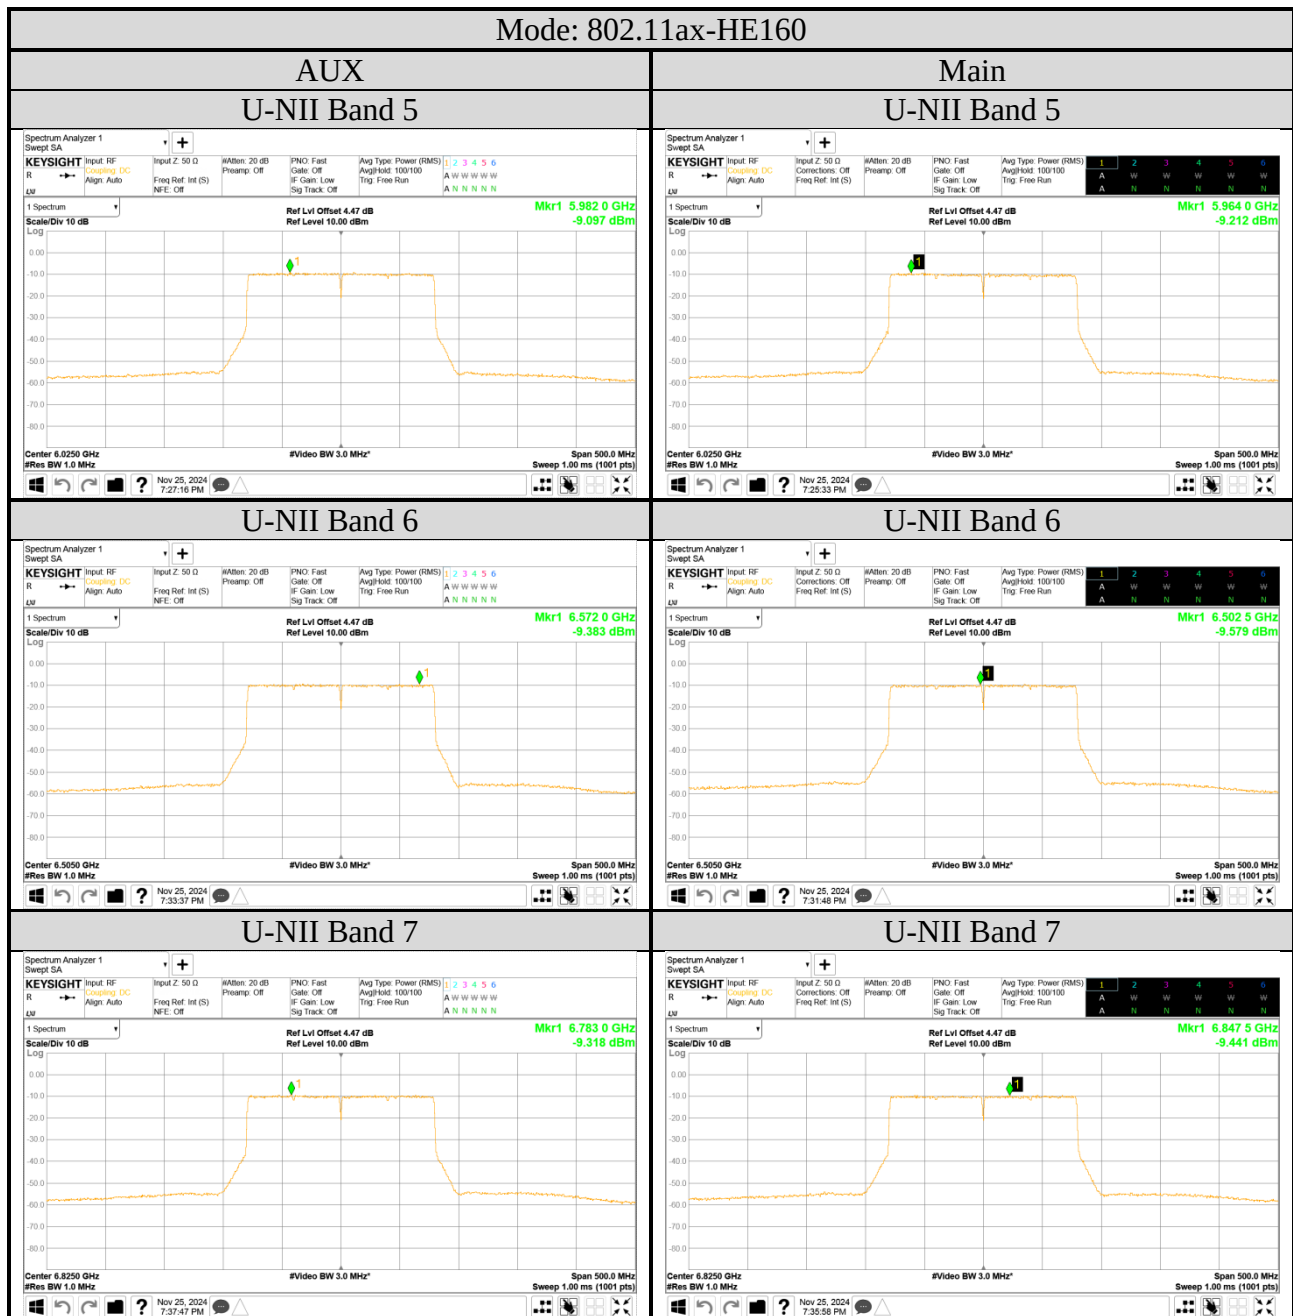


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

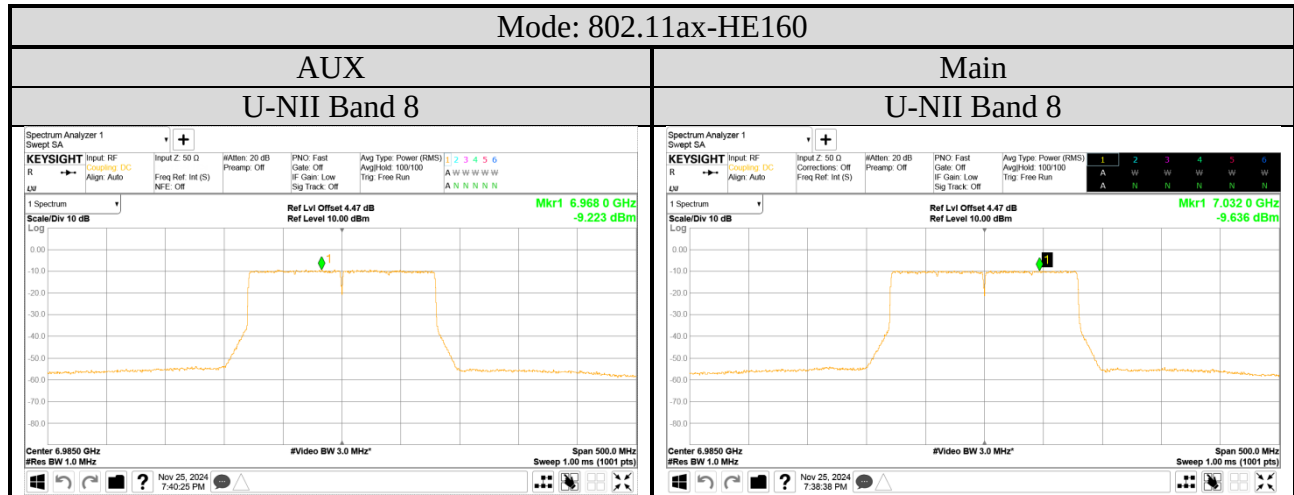


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

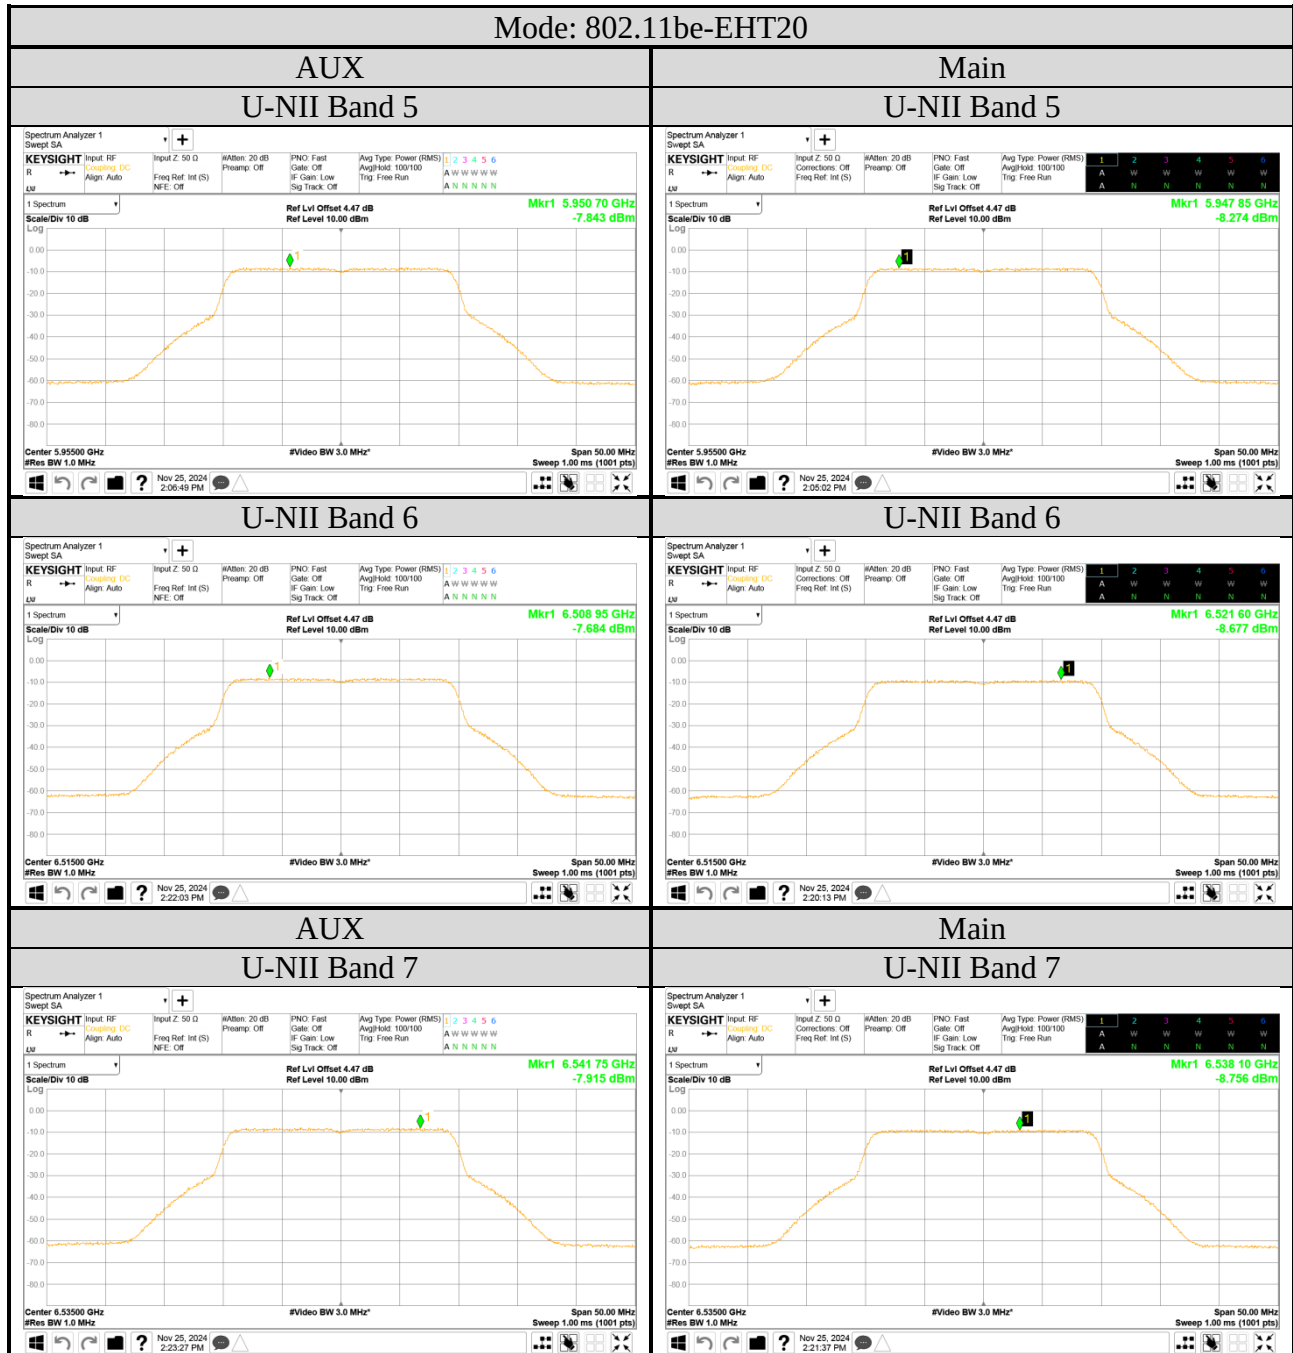


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

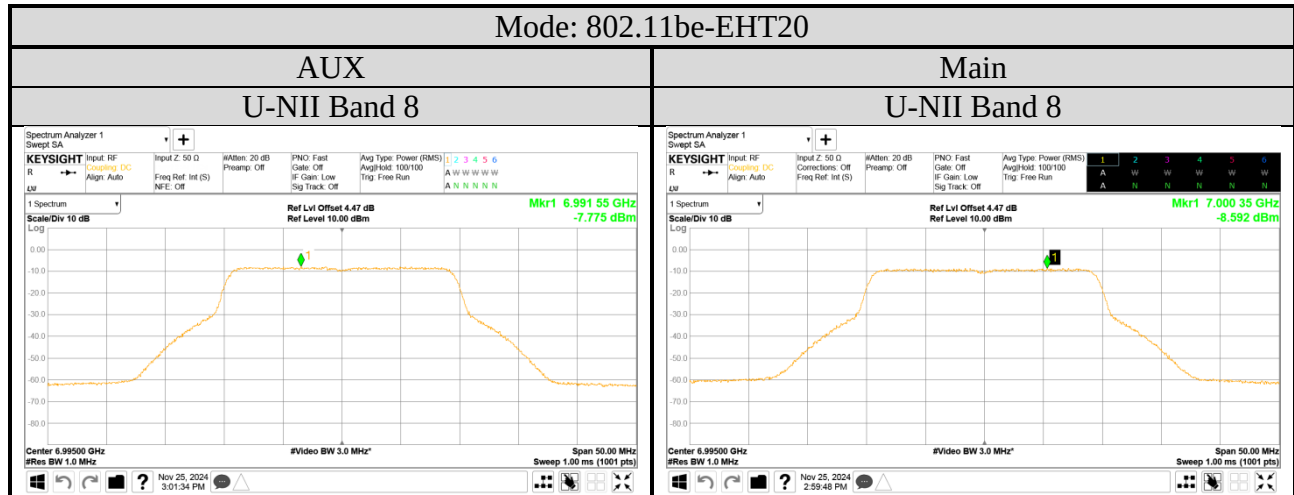


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

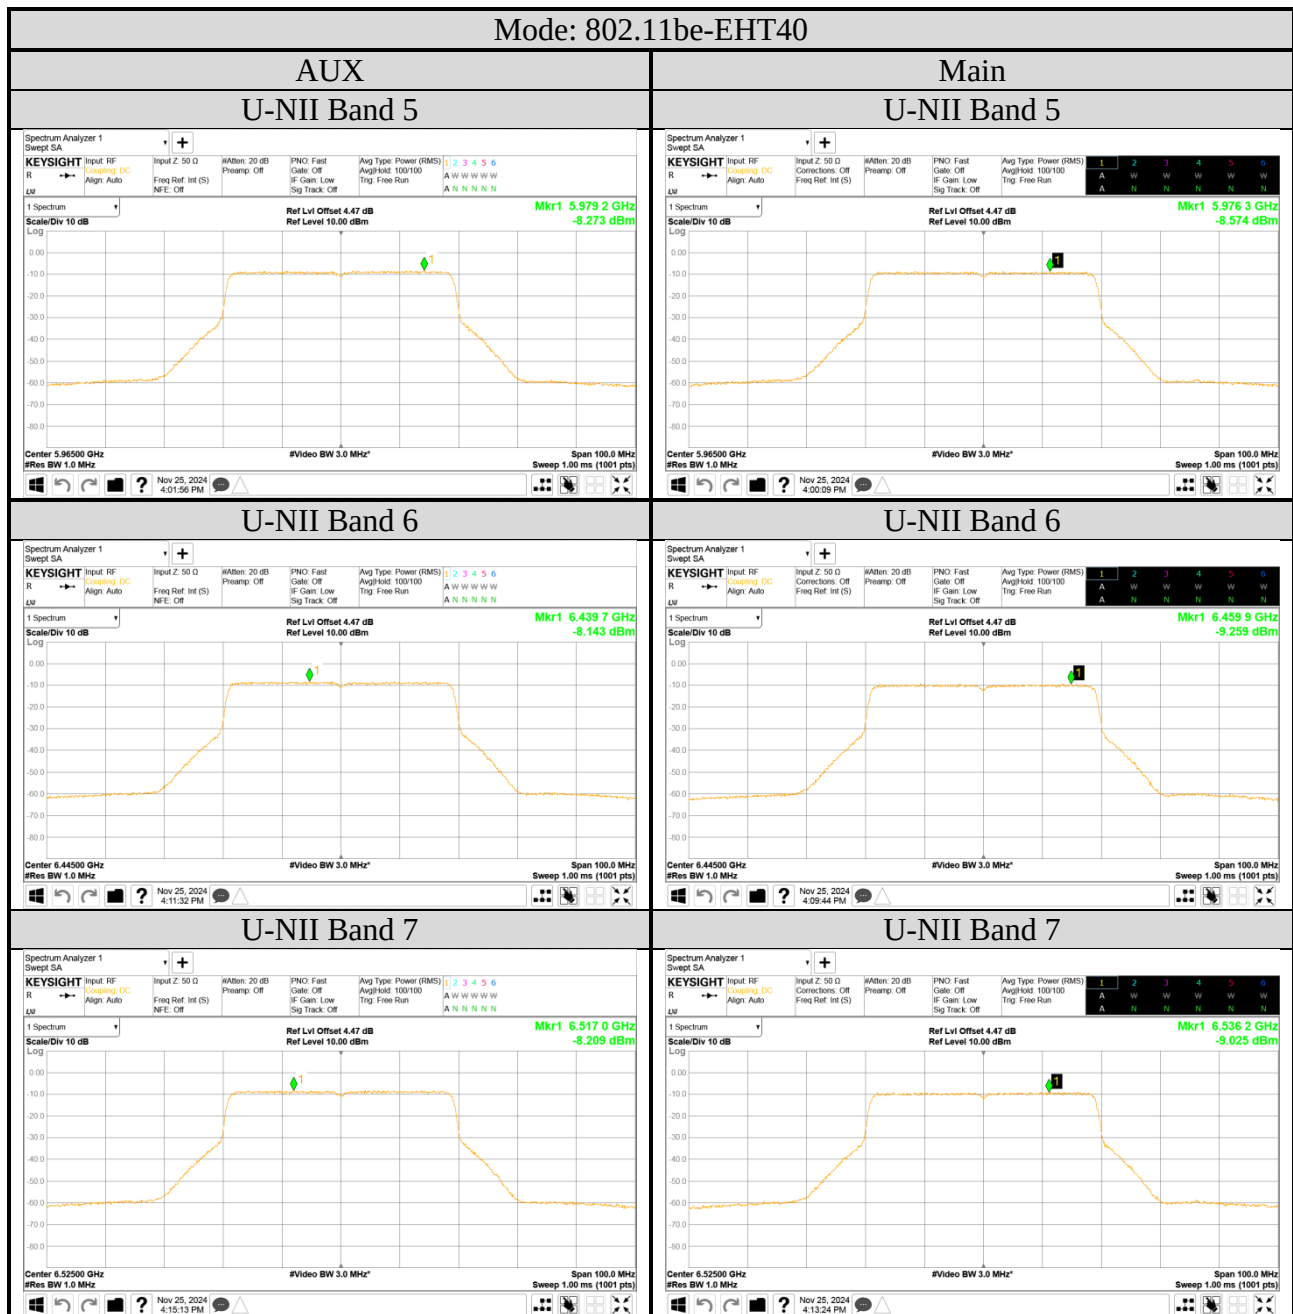


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

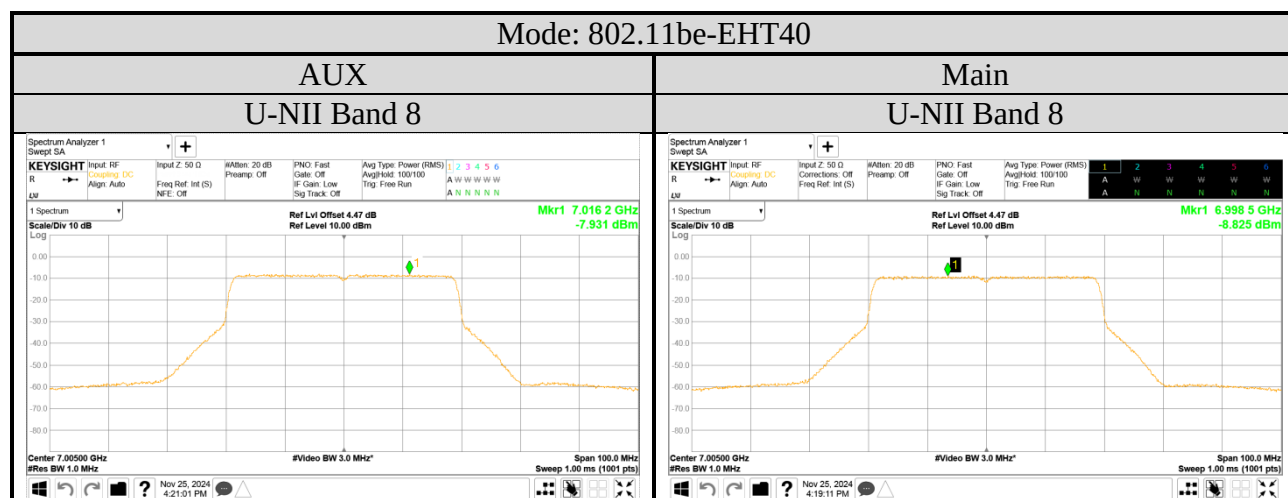


**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

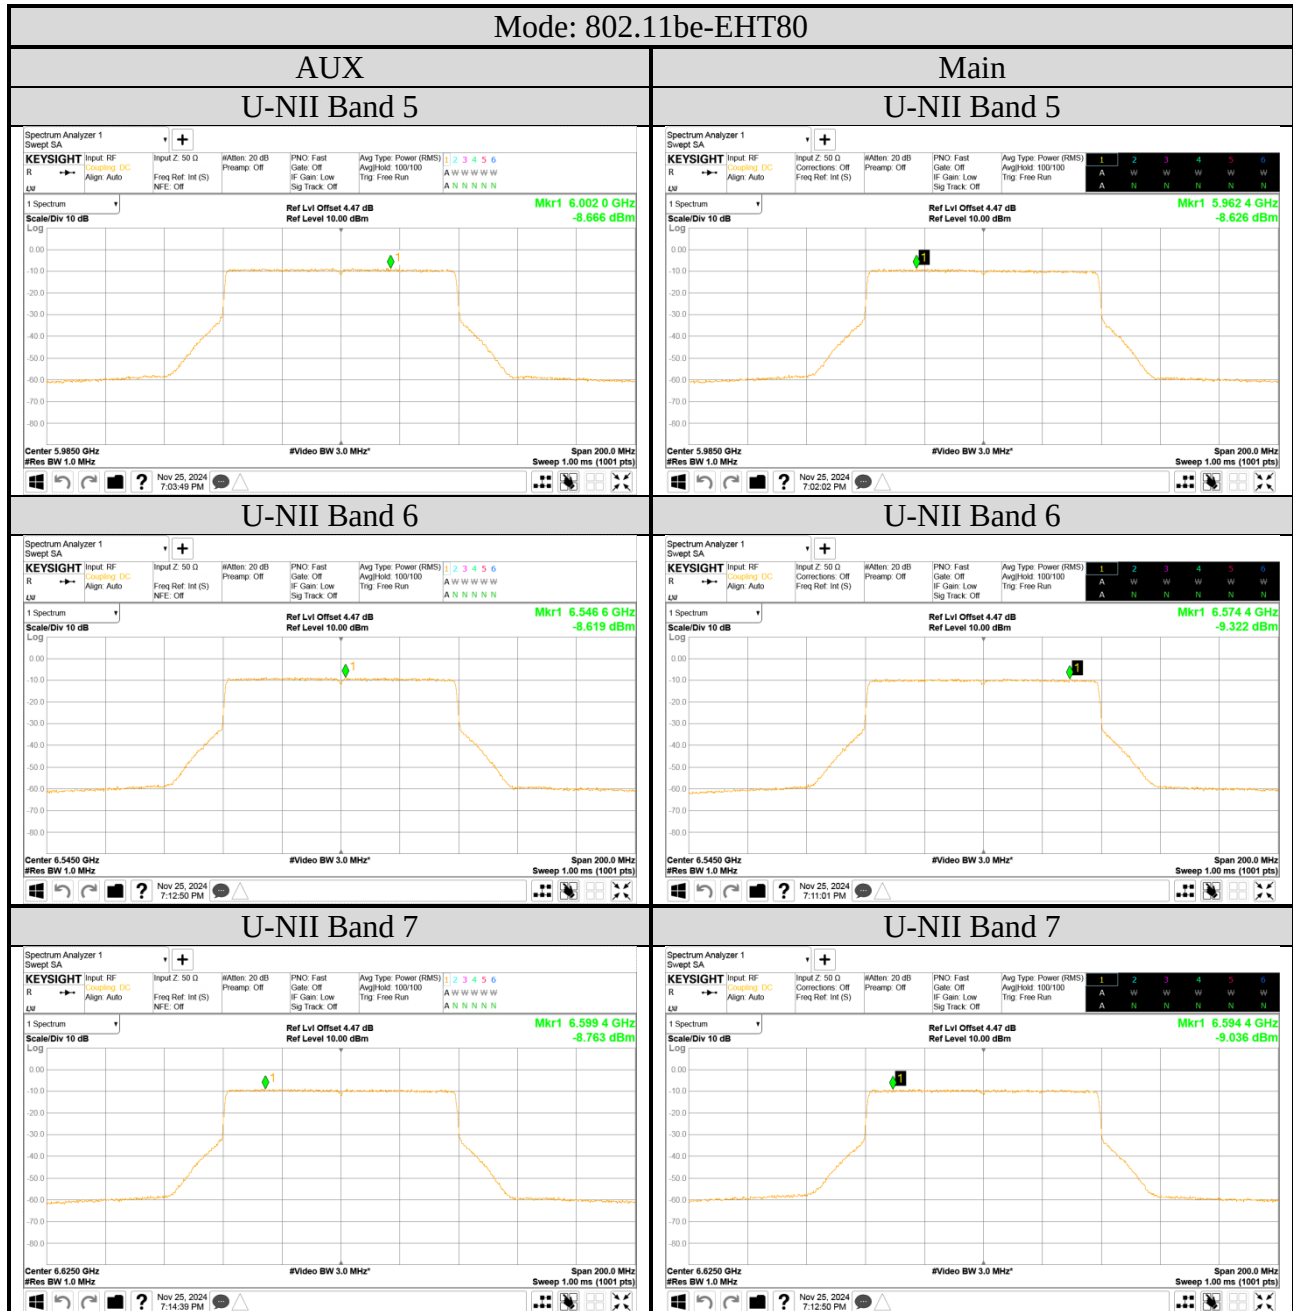

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

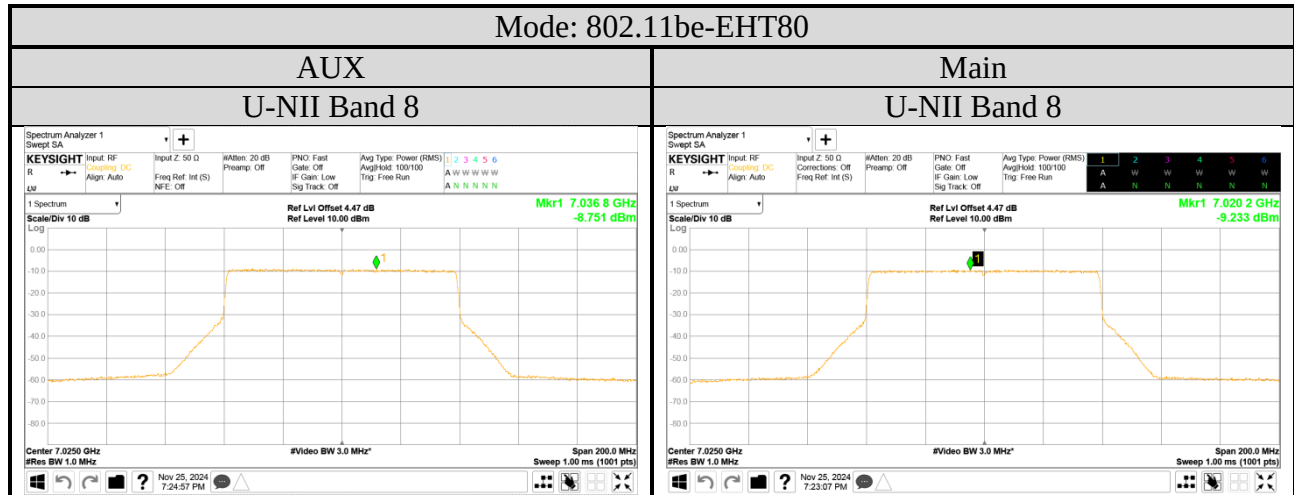

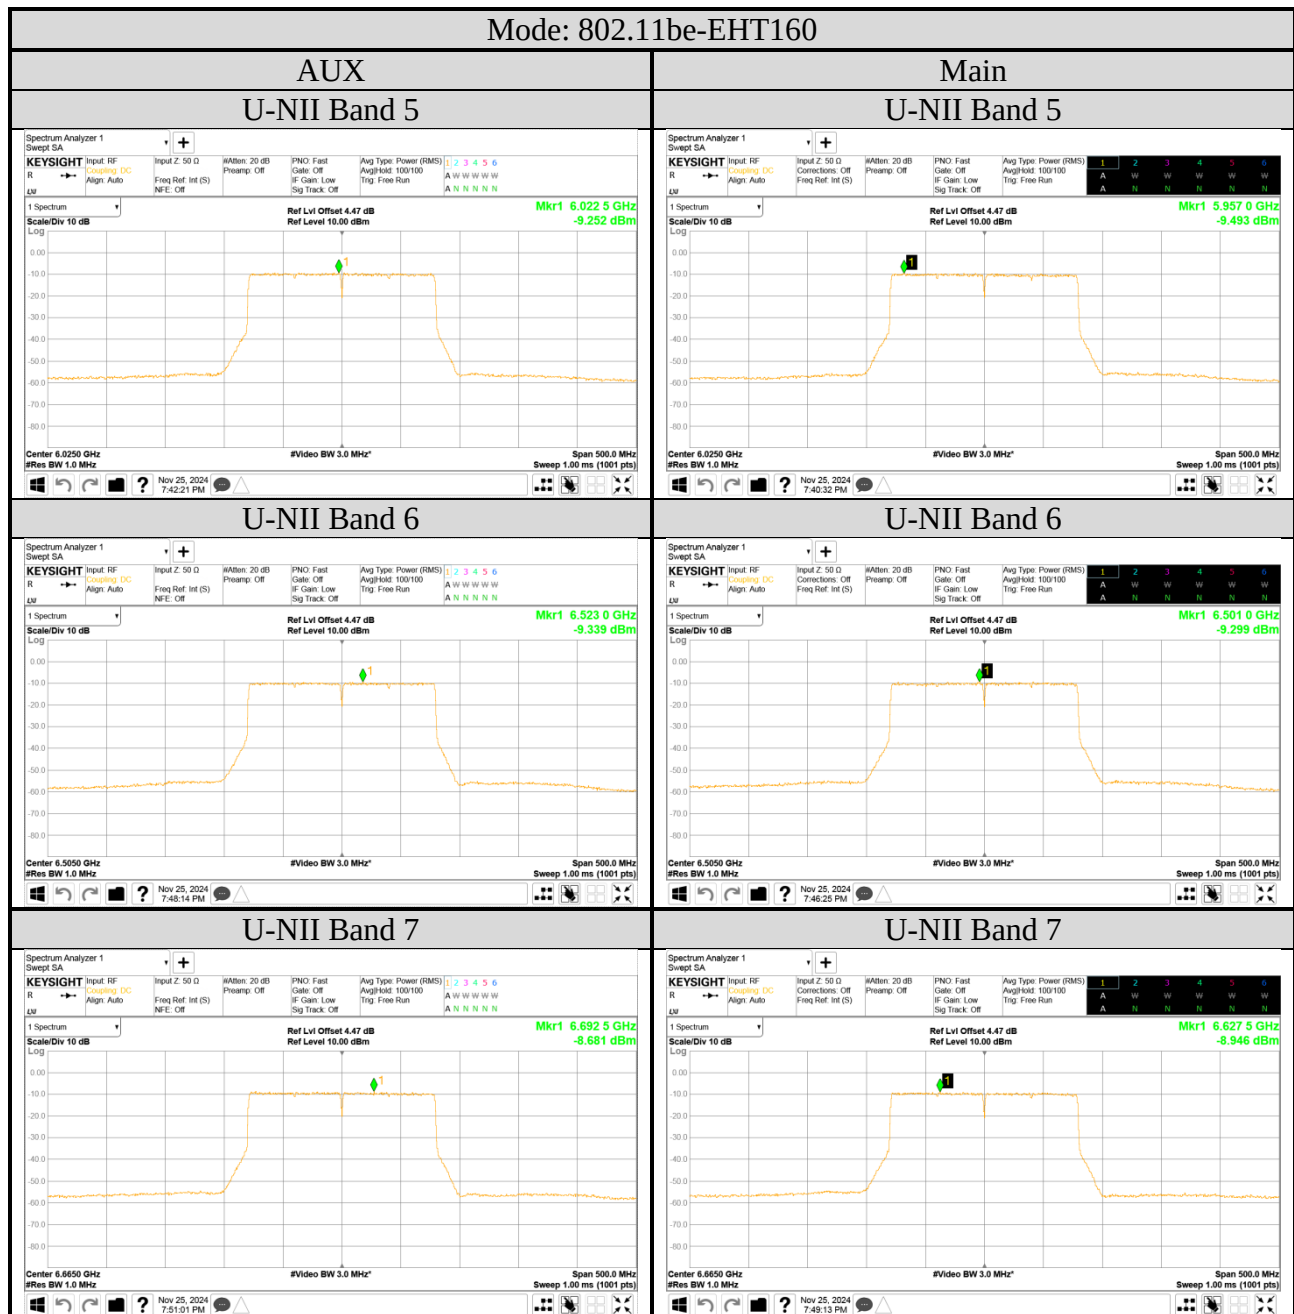

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

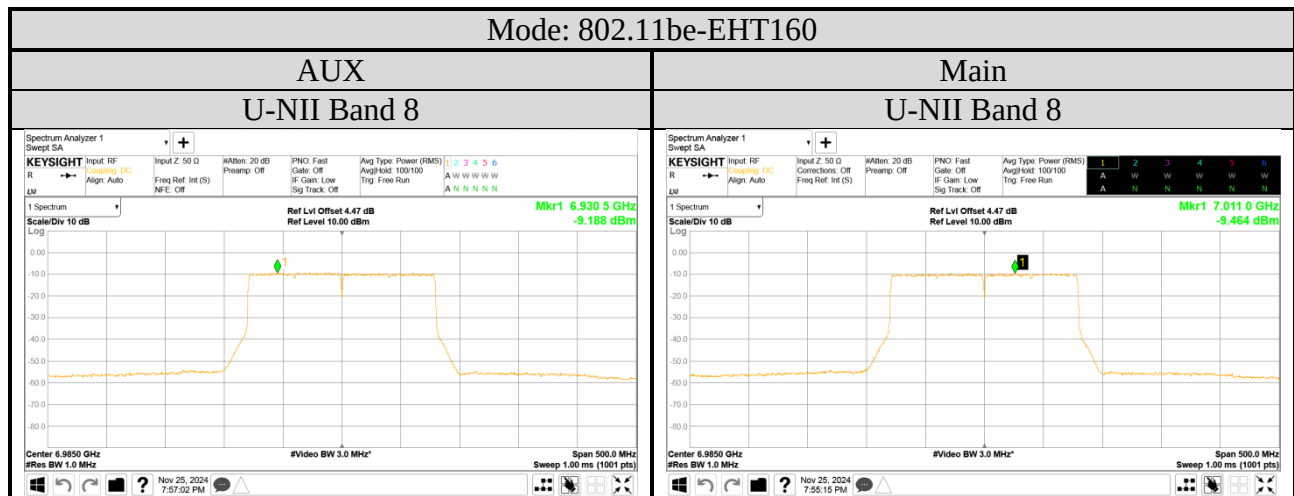

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

