


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

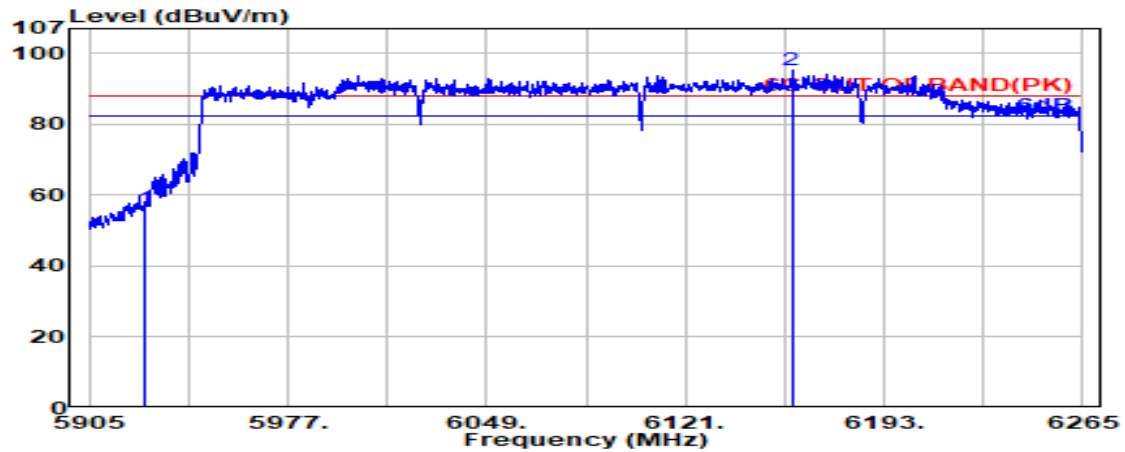

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	52.34	56.31	88.20	31.89	Peak
@ 6159.520	34.40	9.30	39.27	90.85	95.28	---	---	Peak

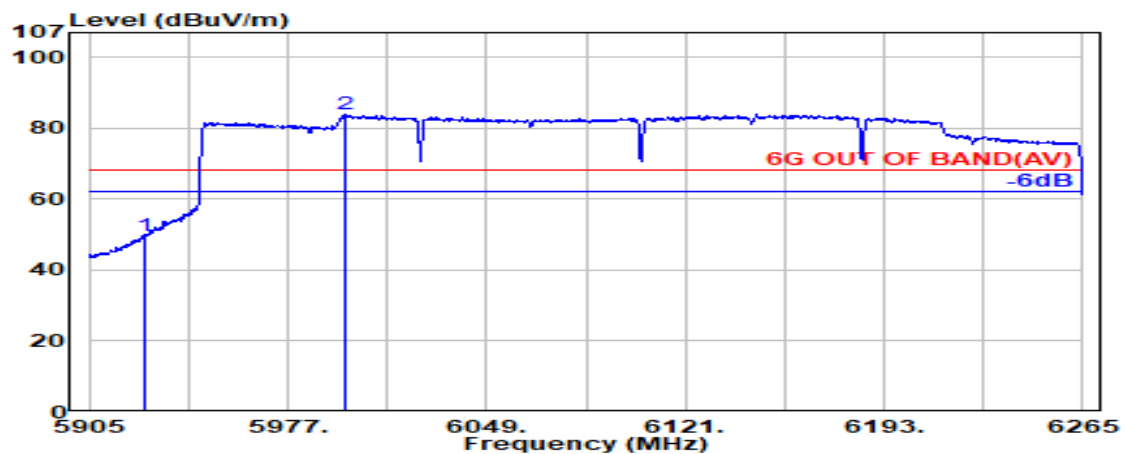

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.50	49.47	68.20	18.73	Average
@ 5997.340	34.01	9.17	39.25	80.17	84.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

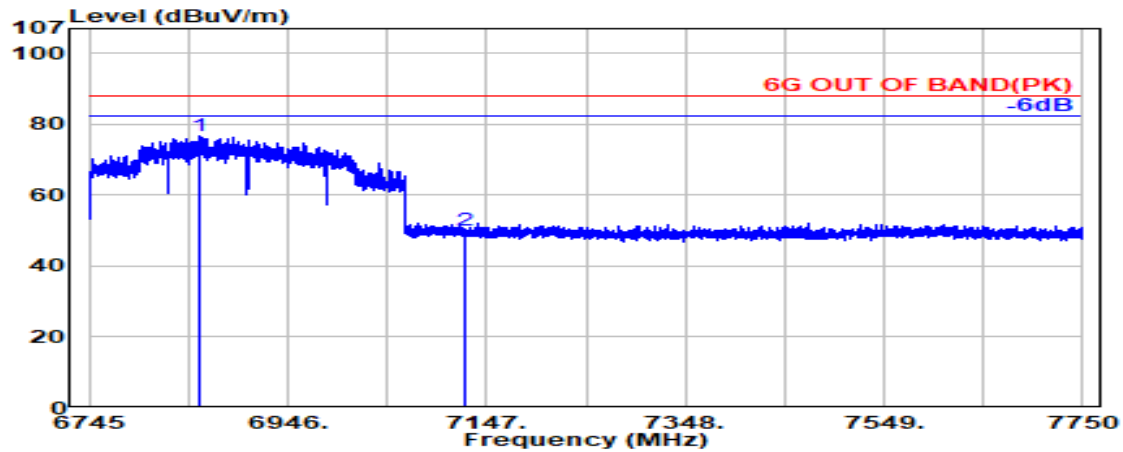

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6856.442	35.20	9.82	39.34	70.84	76.52	---	---	Peak
7125.000	35.70	9.99	39.38	43.58	49.88	88.20	38.32	Peak

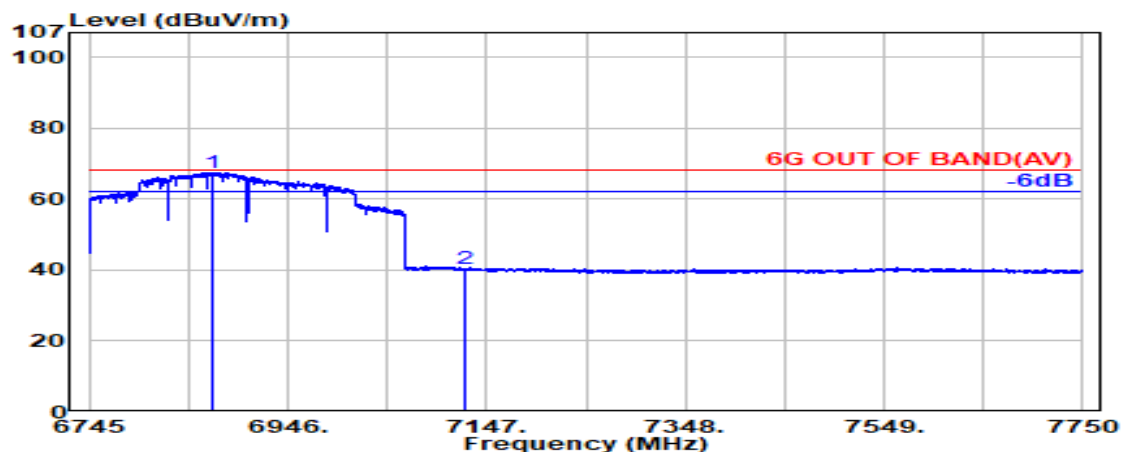

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6870.238	35.20	9.83	39.34	61.91	67.60	---	---	Average
7125.000	35.70	9.99	39.38	34.21	40.52	68.20	27.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

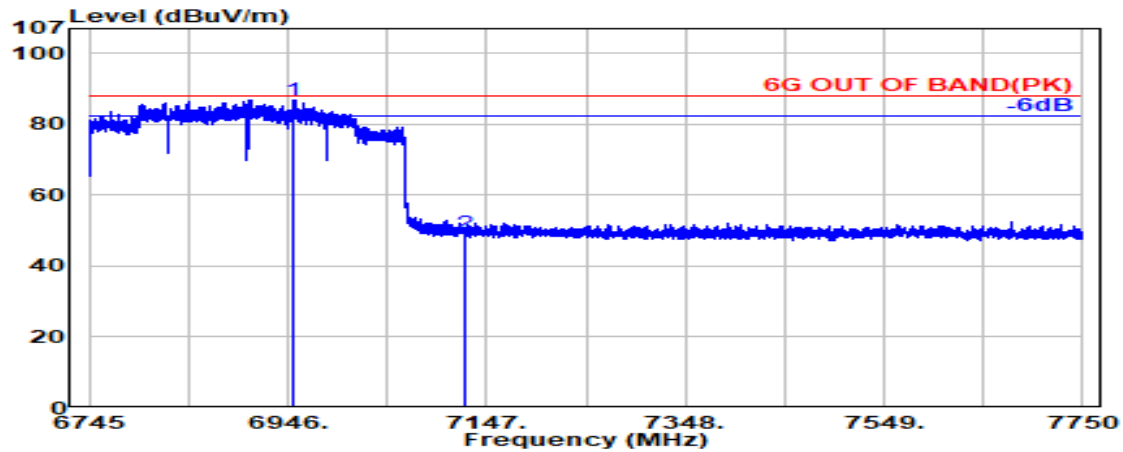

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6950.995	35.20	9.89	39.35	81.14	86.88	---	---	Peak
7125.000	35.70	9.99	39.38	42.87	49.17	88.20	39.03	Peak

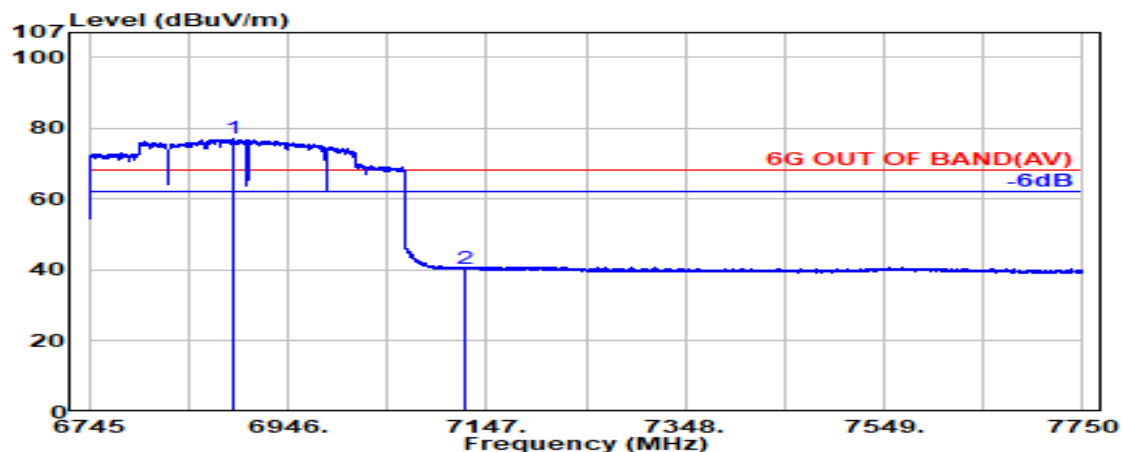

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6890.576	35.20	9.84	39.34	71.30	77.00	---	---	Average
7125.000	35.70	9.99	39.38	34.22	40.53	68.20	27.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● OFDMA Modulation

Tones	26T	RU Index	0
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

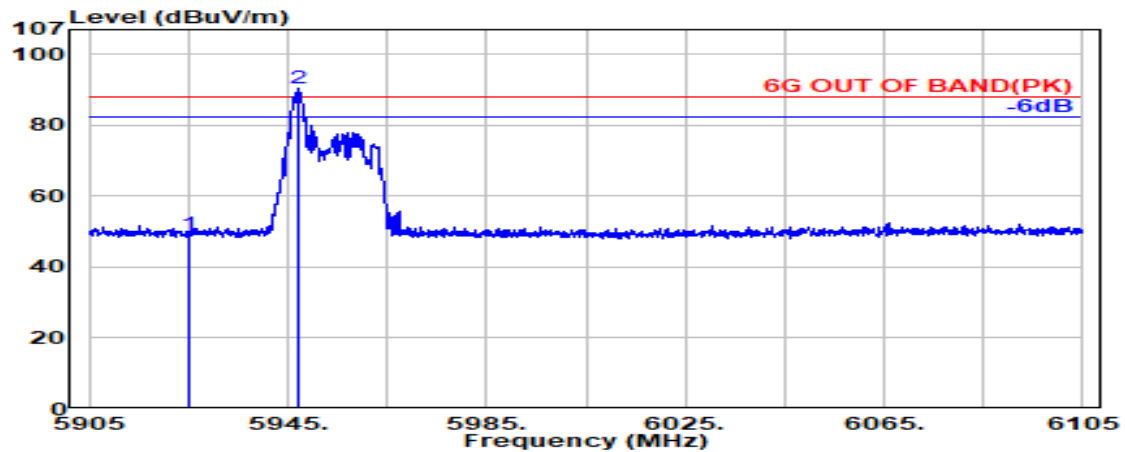

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.48	49.45	88.20	38.75	Peak
@ 5947.200	34.10	9.12	39.24	86.59	90.58	---	---	Peak

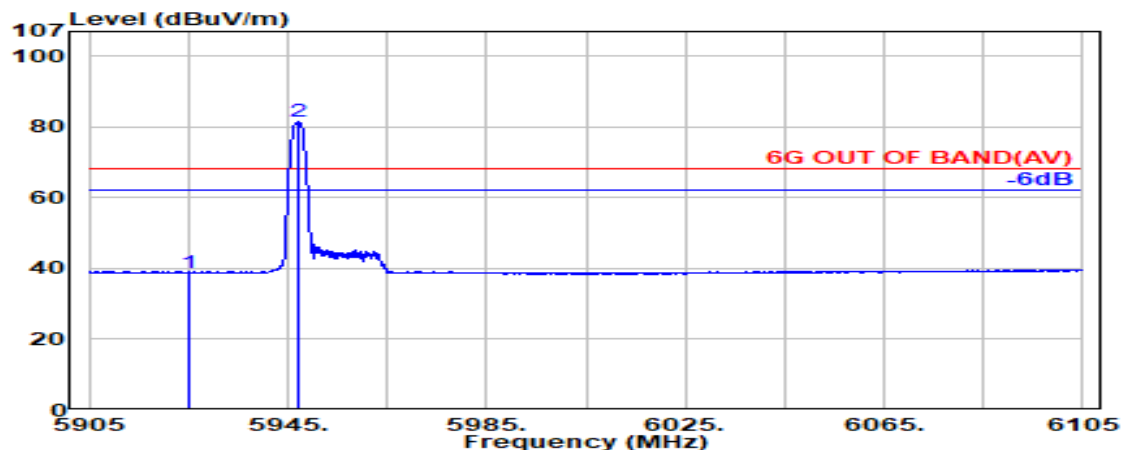

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	34.83	38.80	68.20	29.40	Average
@ 5947.000	34.10	9.12	39.24	77.41	81.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T	RU Index	0
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

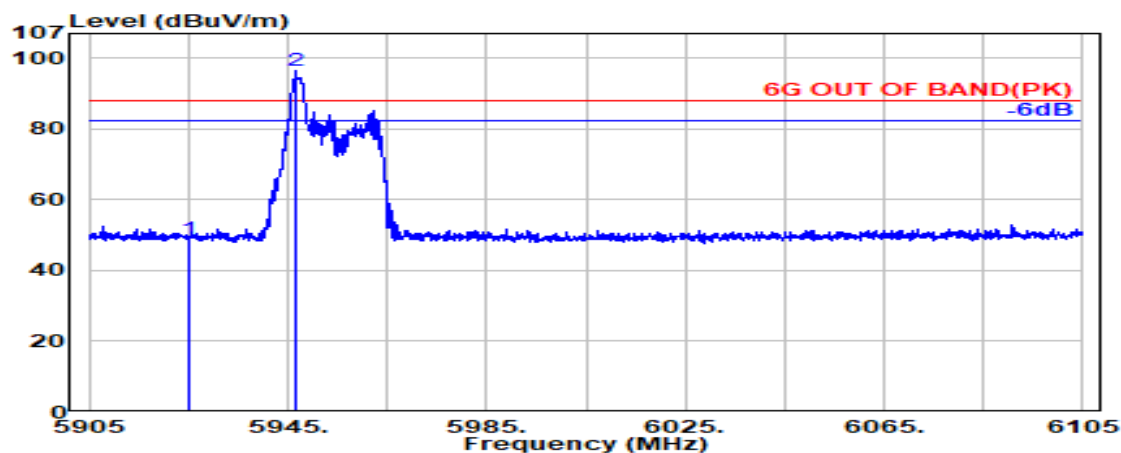

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.09	49.06	88.20	39.14	Peak
@ 5946.600	34.10	9.12	39.24	92.38	96.36	---	---	Peak

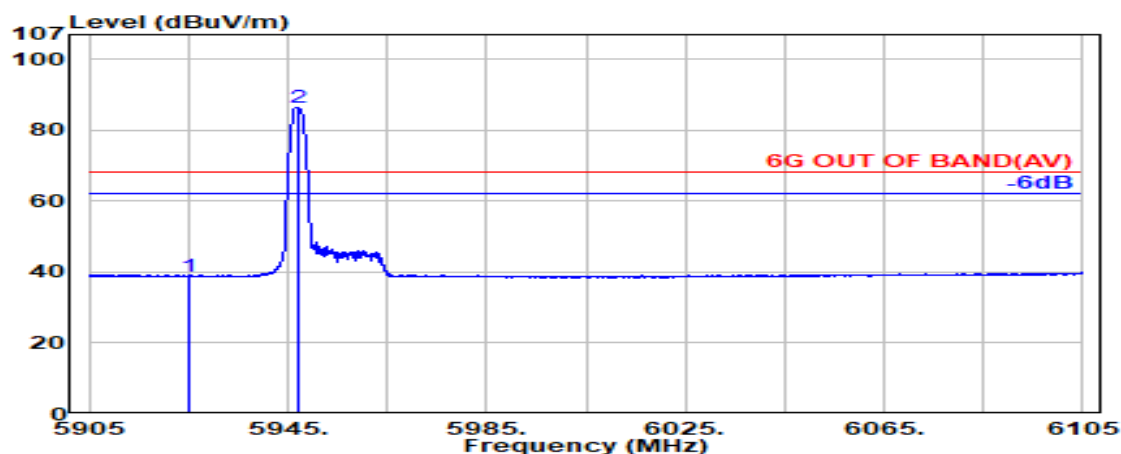

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	34.93	38.90	68.20	29.30	Average
@ 5947.200	34.10	9.12	39.24	82.49	86.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T	RU Index	3
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

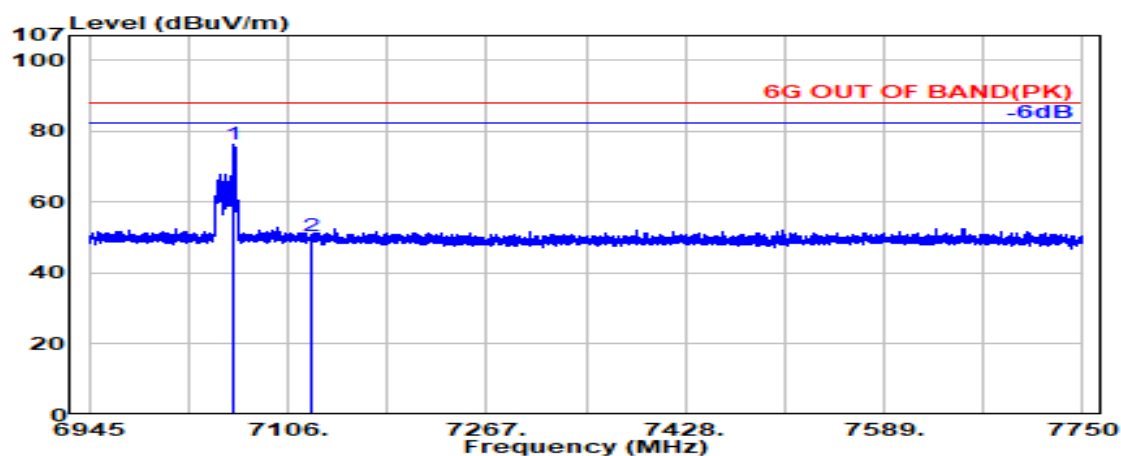

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7062.400	35.37	9.95	39.37	70.39	76.35	---	---	Peak
@ 7125.000	35.70	9.99	39.38	44.02	50.32	88.20	37.88	Peak

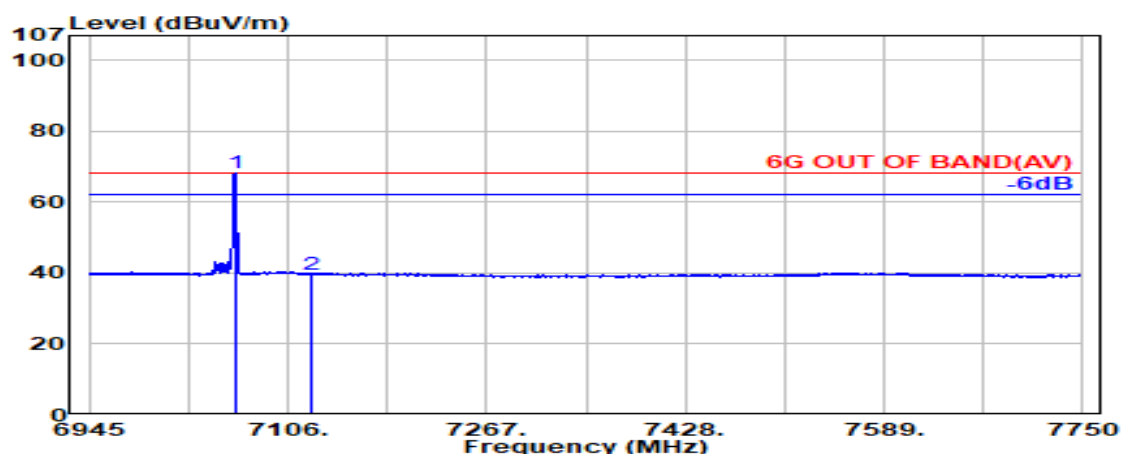

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.300	35.38	9.95	39.37	62.12	68.08	---	---	Average
@ 7125.000	35.70	9.99	39.38	33.39	39.69	68.20	28.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T	RU Index	3
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

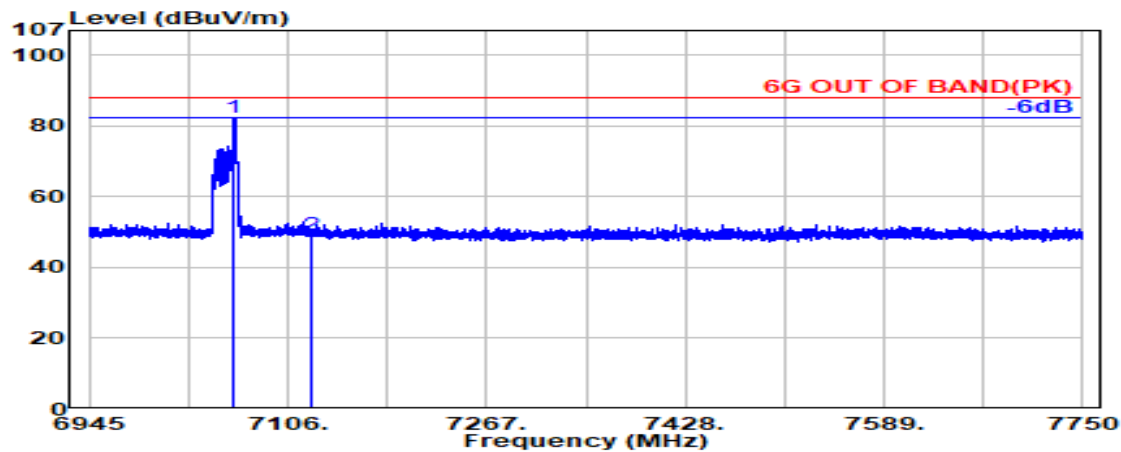

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
7062.300	35.37	9.95	39.37	76.46	82.42	---	---	Peak
@ 7125.000	35.70	9.99	39.38	42.89	49.20	88.20	39.00	Peak

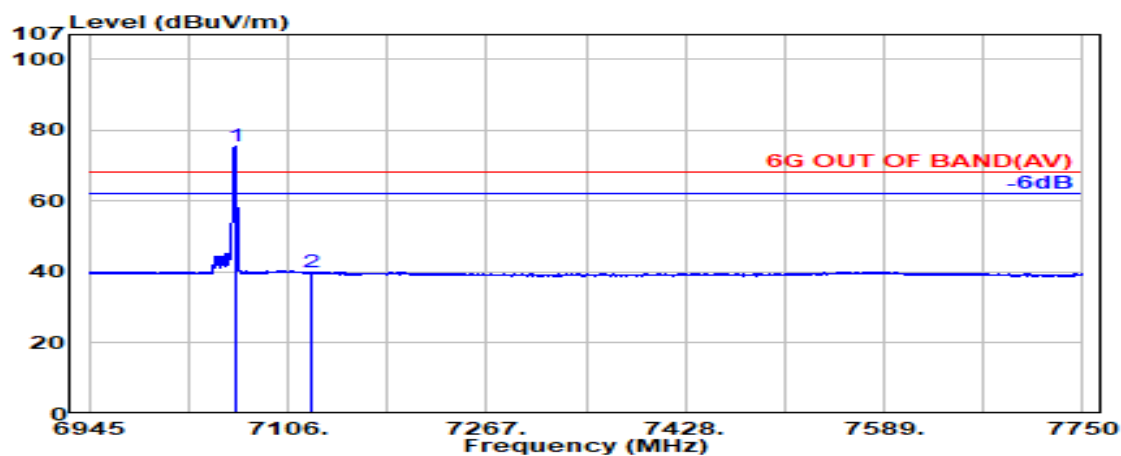

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
7063.000	35.38	9.95	39.37	69.41	75.38	---	---	Average
@ 7125.000	35.70	9.99	39.38	33.53	39.83	68.20	28.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	3
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

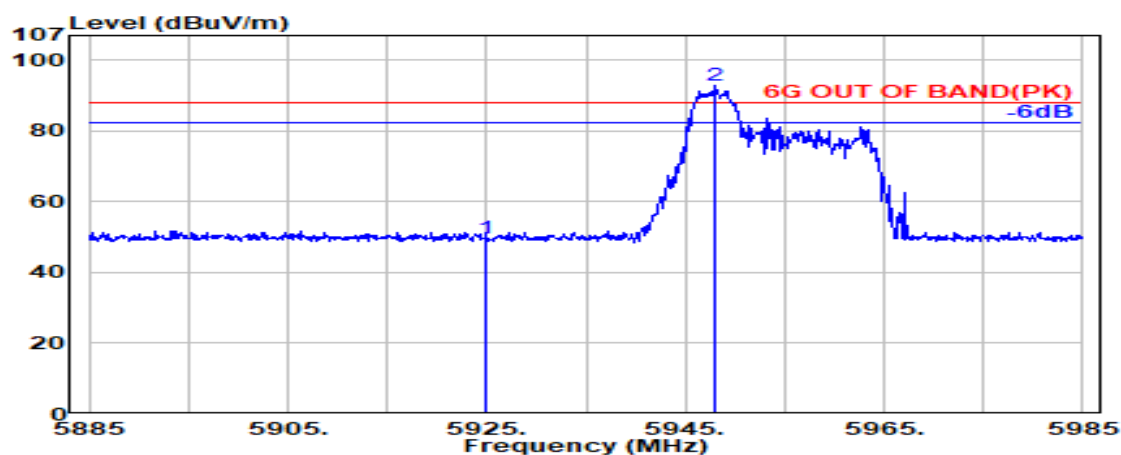

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.73	49.70	88.20	38.50	Peak
@ 5948.000	34.10	9.12	39.24	88.72	92.70	---	---	Peak

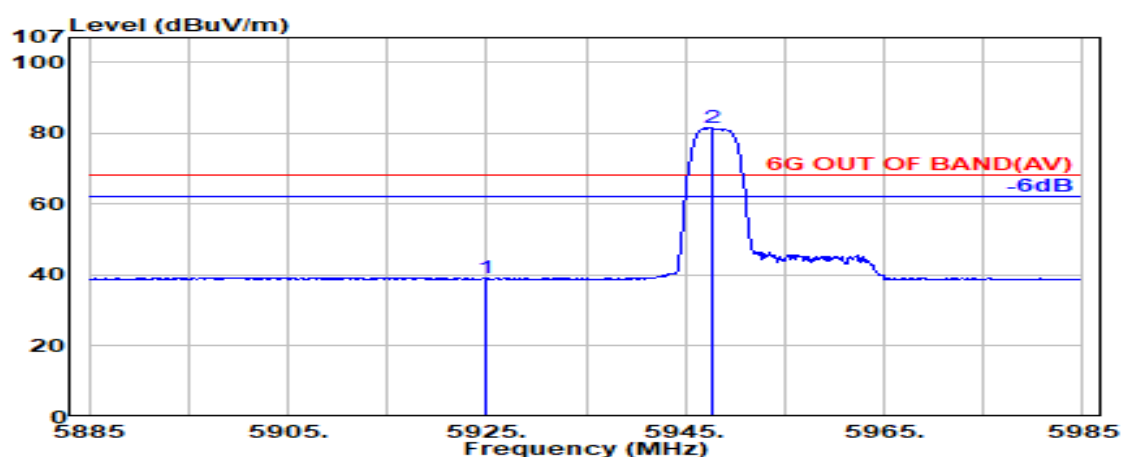

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.01	38.98	68.20	29.22	Average
@ 5947.600	34.10	9.12	39.24	77.75	81.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	3
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

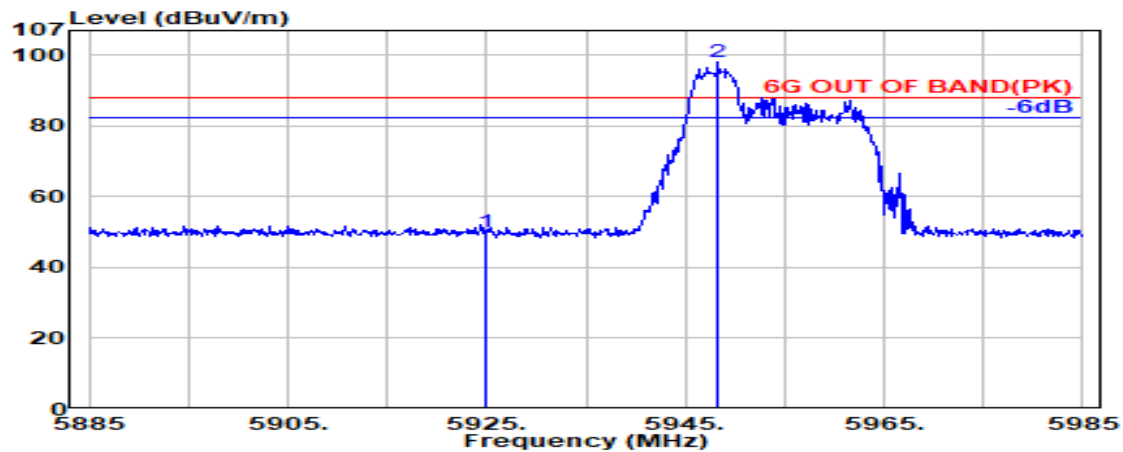

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.16	50.13	88.20	38.07	Peak
@ 5948.200	34.10	9.12	39.24	93.94	97.92	---	---	Peak

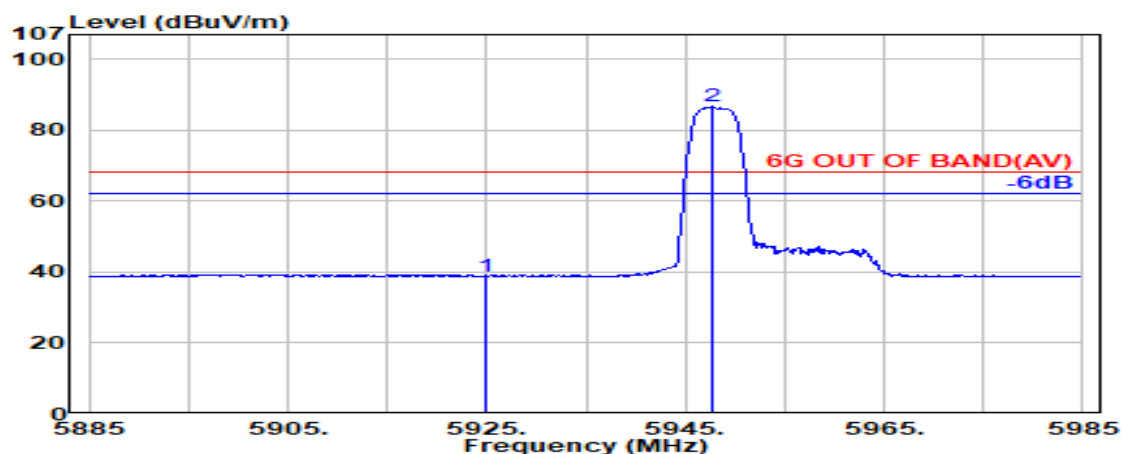

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	34.98	38.95	68.20	29.25	Average
@ 5947.600	34.10	9.12	39.24	82.66	86.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	52T	RU Index	52
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

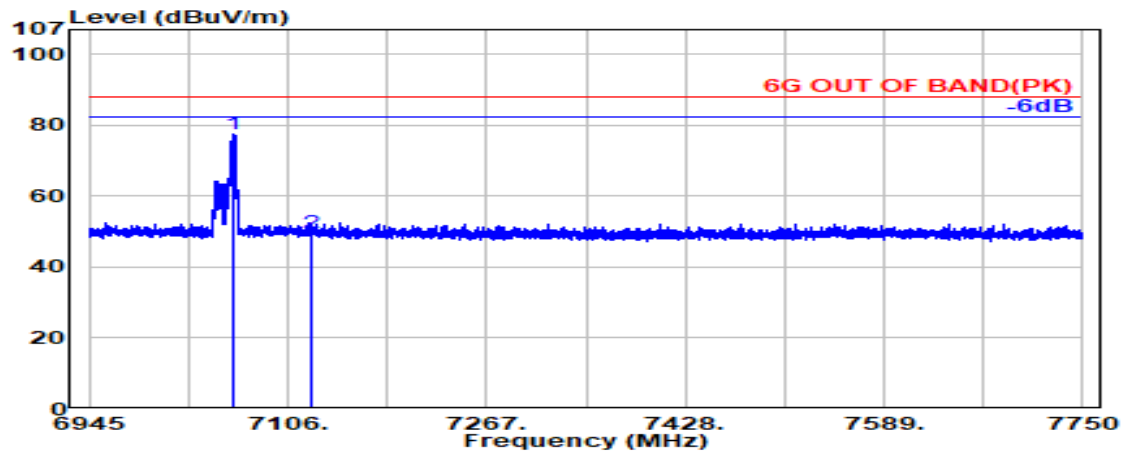

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7061.100	35.37	9.95	39.37	71.58	77.53	---	---	Peak
7125.000	35.70	9.99	39.38	43.32	49.63	88.20	38.57	Peak

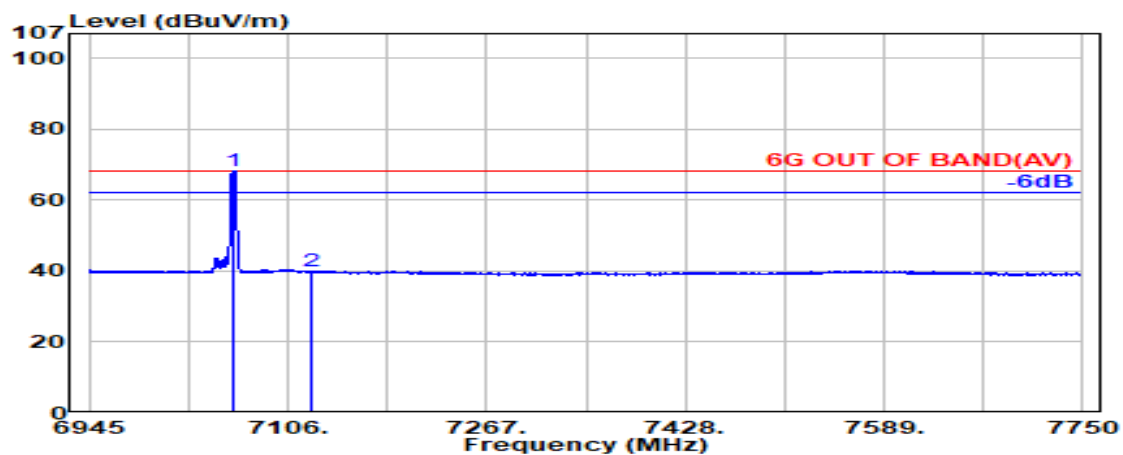

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7062.500	35.38	9.95	39.37	62.41	68.37	---	---	Average
7125.000	35.70	9.99	39.38	33.49	39.80	68.20	28.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	52
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

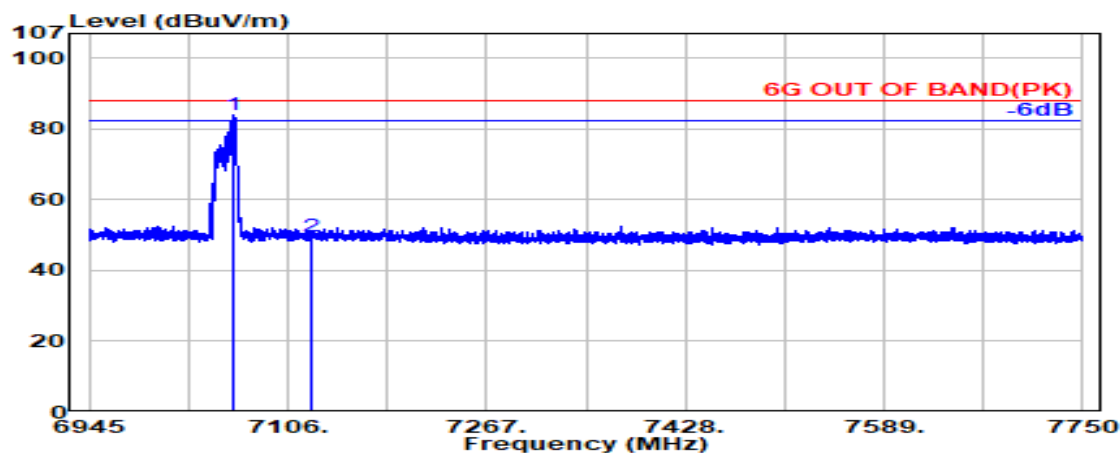

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7062.100	35.37	9.95	39.37	78.08	84.04	---	---	Peak
7125.000	35.70	9.99	39.38	43.33	49.64	88.20	38.56	Peak

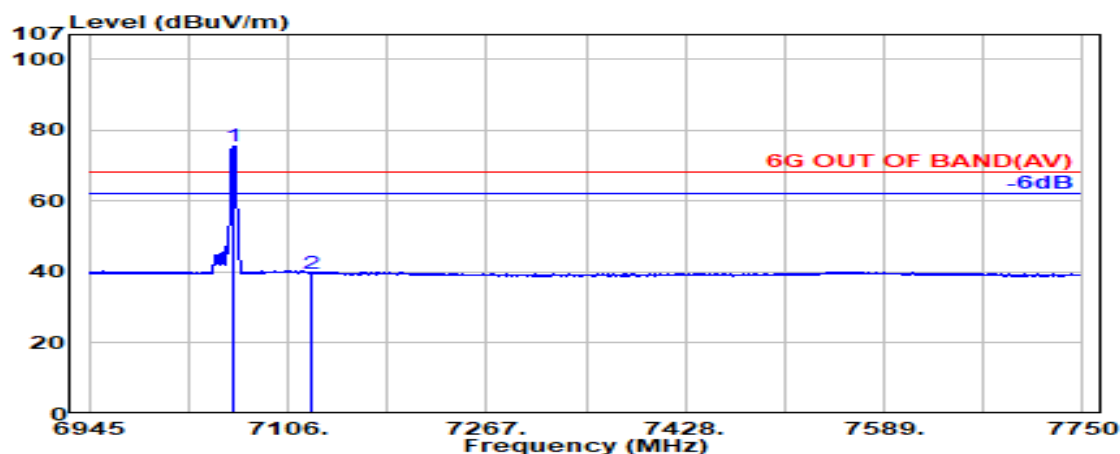

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7062.600	35.38	9.95	39.37	69.64	75.60	---	---	Average
7125.000	35.70	9.99	39.38	33.41	39.72	68.20	28.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

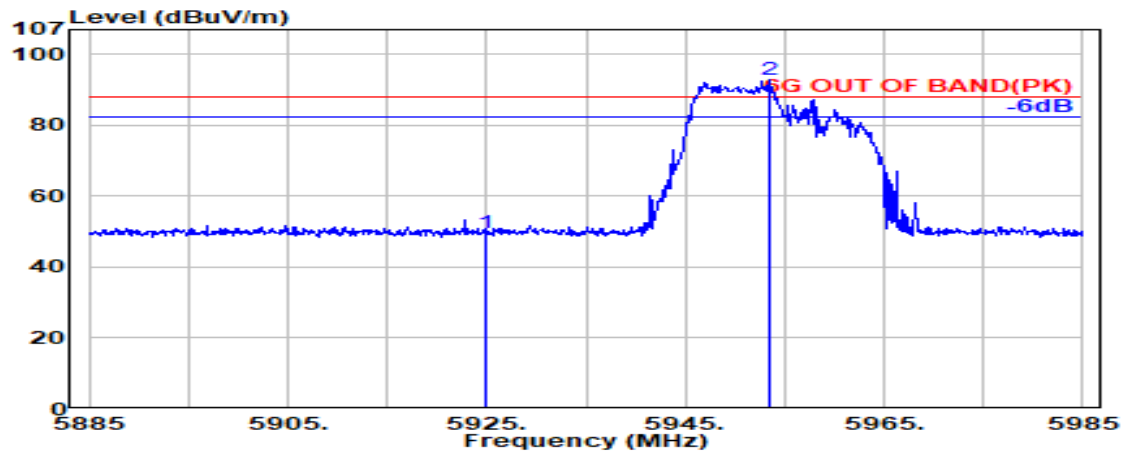

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.78	49.75	88.20	38.45	Peak
@ 5953.500	34.09	9.13	39.24	88.92	92.90	---	---	Peak

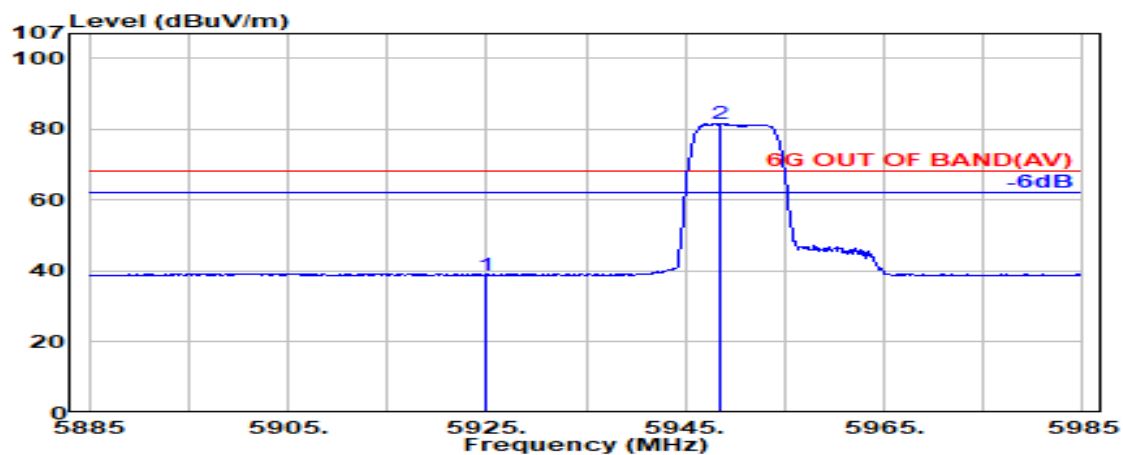

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	34.94	38.91	68.20	29.29	Average
@ 5948.600	34.10	9.13	39.24	77.51	81.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

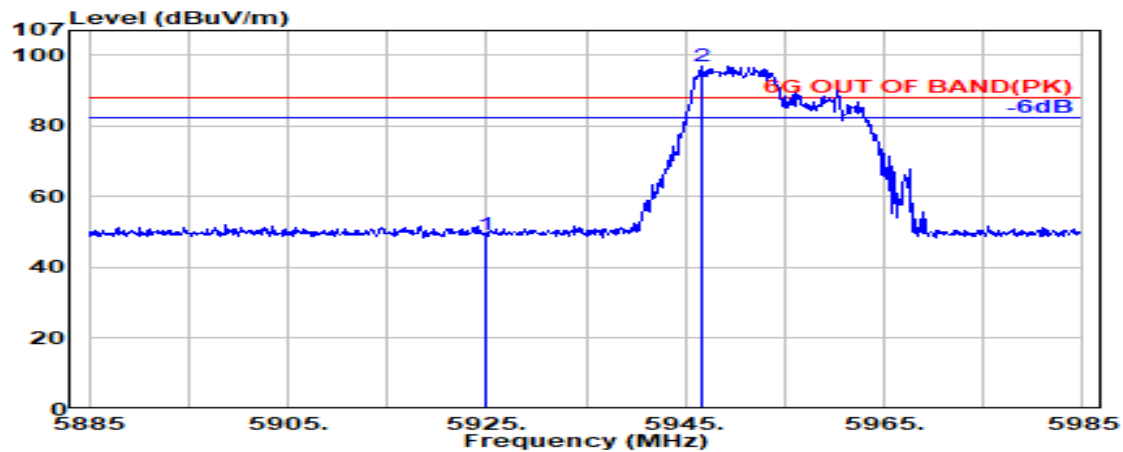

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.22	49.19	88.20	39.01	Peak
@ 5946.700	34.10	9.12	39.24	92.94	96.92	---	---	Peak

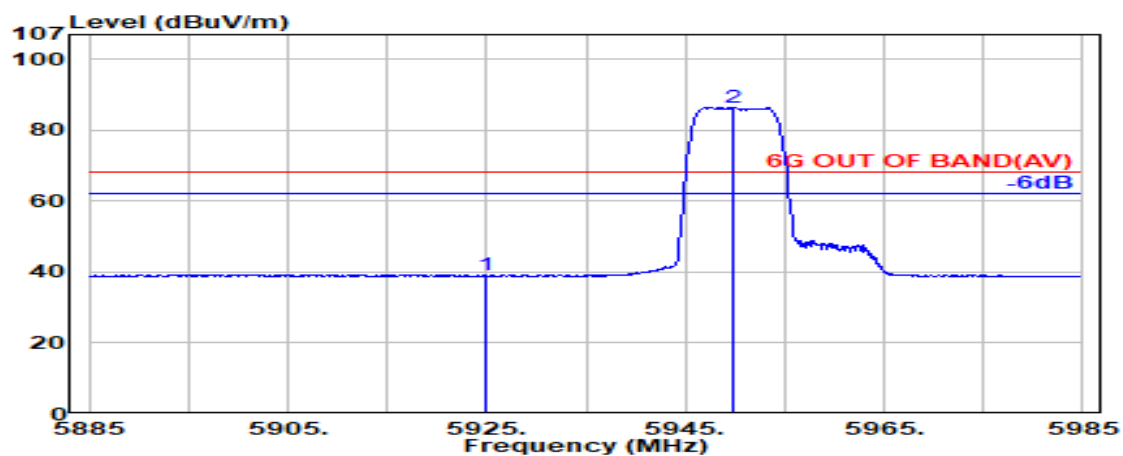

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.05	39.01	68.20	29.19	Average
@ 5949.900	34.10	9.13	39.24	82.61	86.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	106T	RU Index	60
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

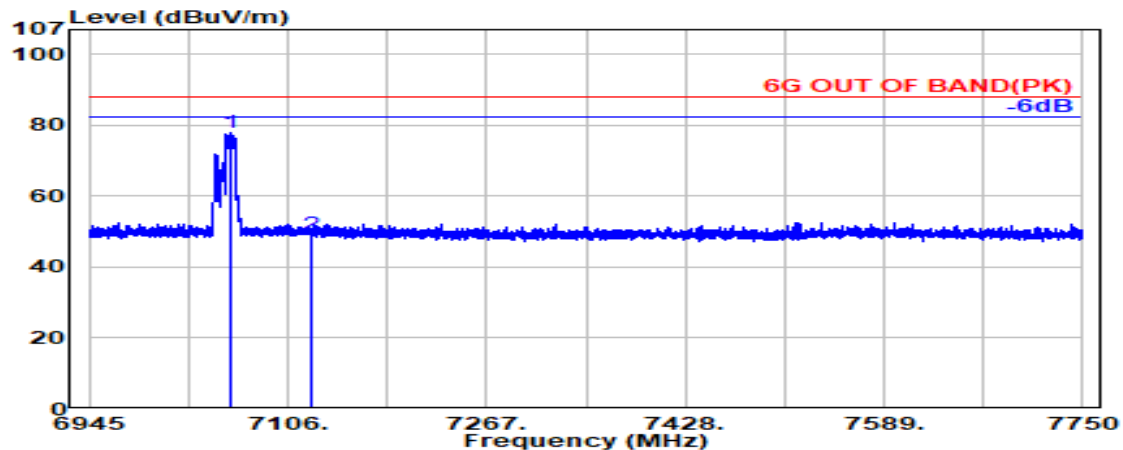

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7058.900	35.35	9.95	39.37	71.83	77.77	---	---	Peak
7125.000	35.70	9.99	39.38	42.89	49.20	88.20	39.00	Peak

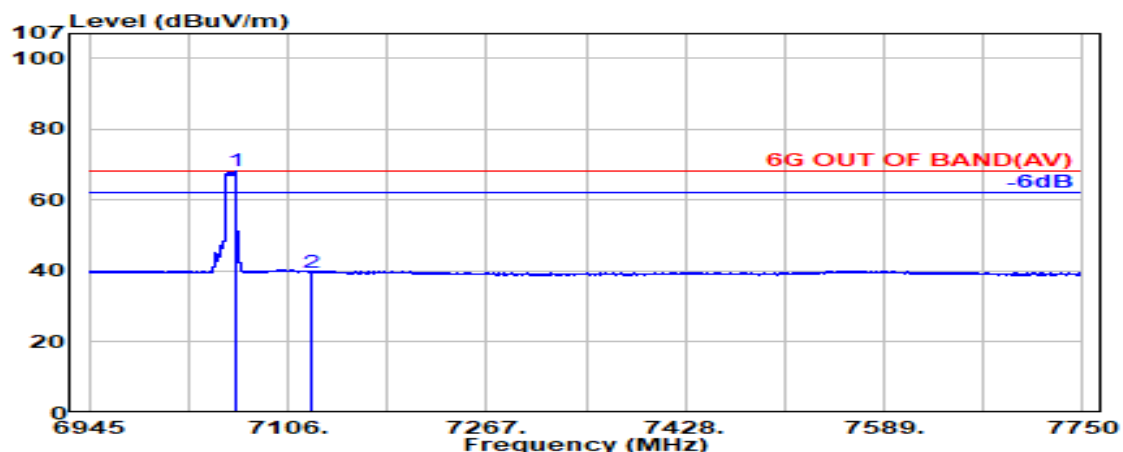

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7063.000	35.38	9.95	39.37	62.09	68.06	---	---	Average
7125.000	35.70	9.99	39.38	33.46	39.76	68.20	28.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	106T	RU Index	60
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

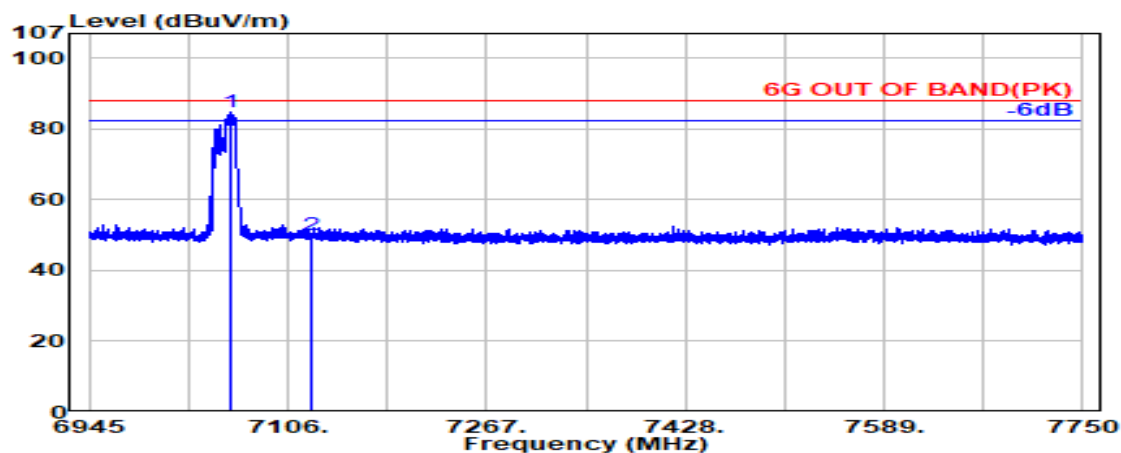

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7059.800	35.36	9.95	39.37	78.81	84.75	---	---	Peak
7125.000	35.70	9.99	39.38	43.70	50.01	88.20	38.19	Peak

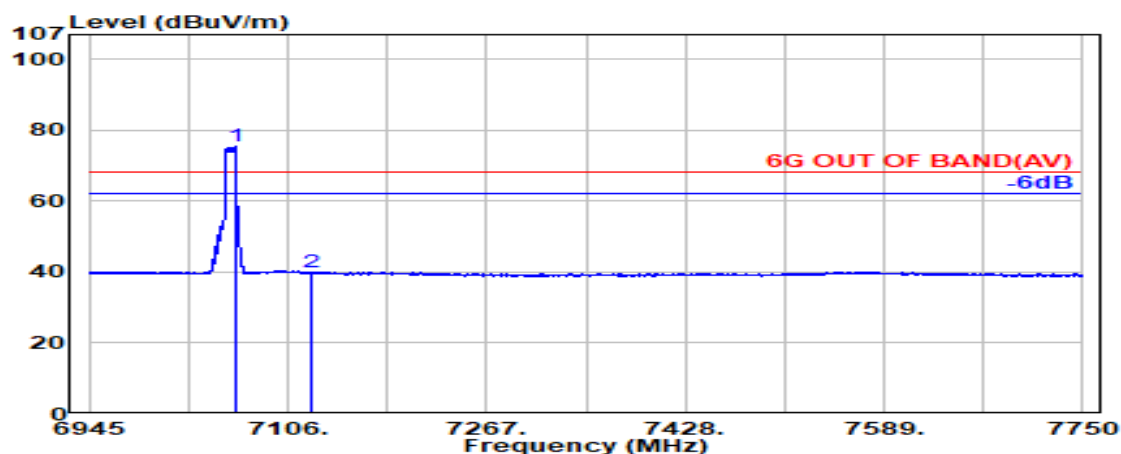

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7063.000	35.38	9.95	39.37	69.35	75.32	---	---	Average
7125.000	35.70	9.99	39.38	33.51	39.82	68.20	28.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

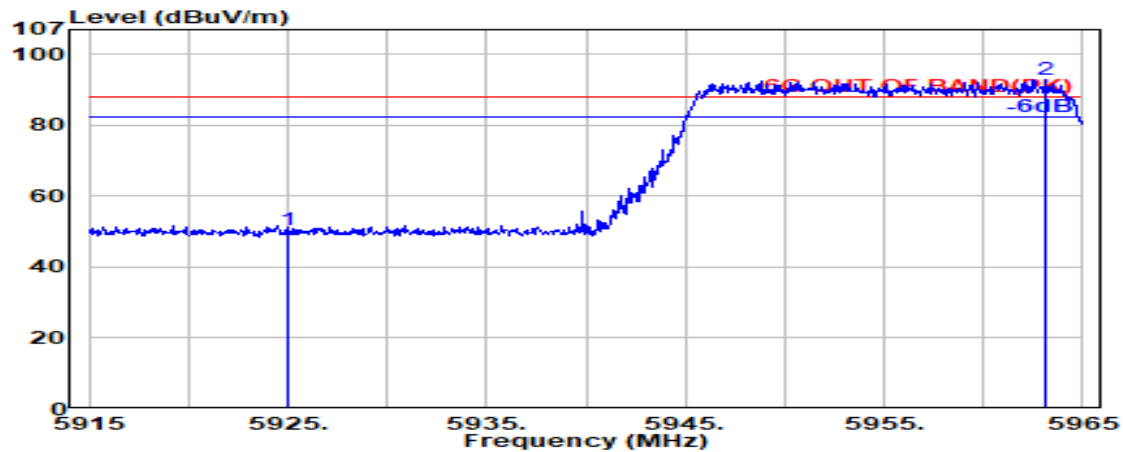

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.44	50.41	88.20	37.79	Peak
@ 5963.150	34.07	9.14	39.24	89.09	93.06	---	---	Peak

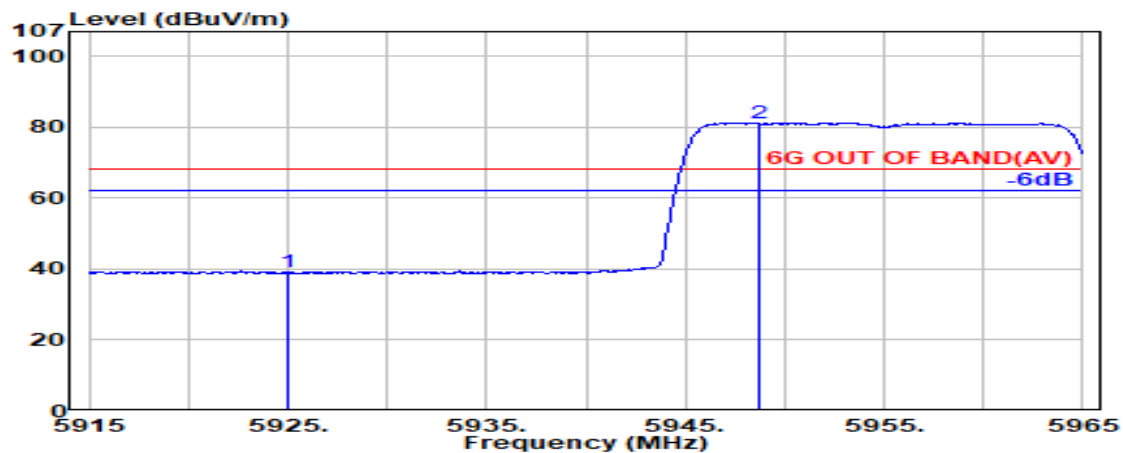

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.03	39.00	68.20	29.20	Average
@ 5948.700	34.10	9.13	39.24	77.30	81.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

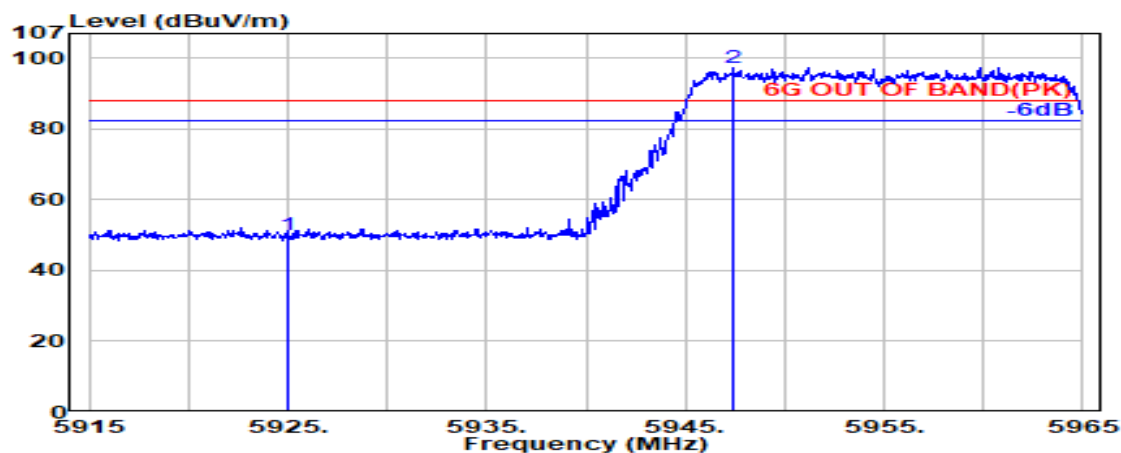

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.24	50.20	88.20	38.00	Peak
@ 5947.450	34.10	9.12	39.24	93.41	97.39	---	---	Peak

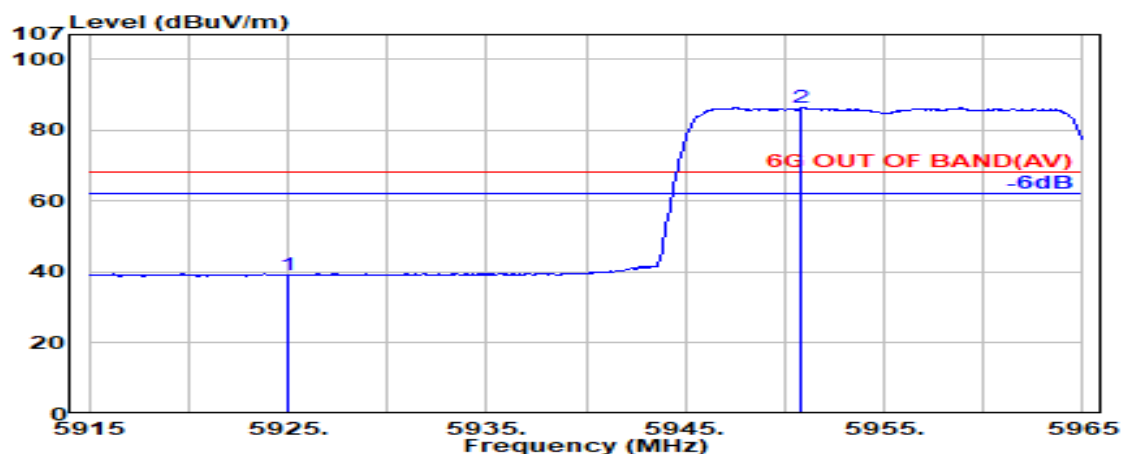

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.17	39.14	68.20	29.06	Average
@ 5950.850	34.10	9.13	39.24	82.44	86.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	242T	RU Index	64
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

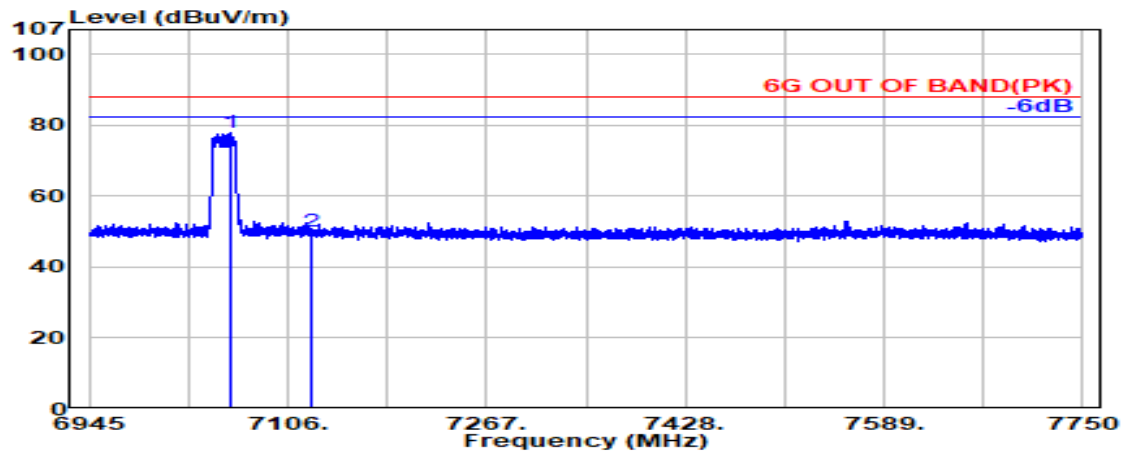

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7060.500	35.36	9.95	39.37	72.04	77.99	---	---	Peak
7125.000	35.70	9.99	39.38	43.91	50.21	88.20	37.99	Peak

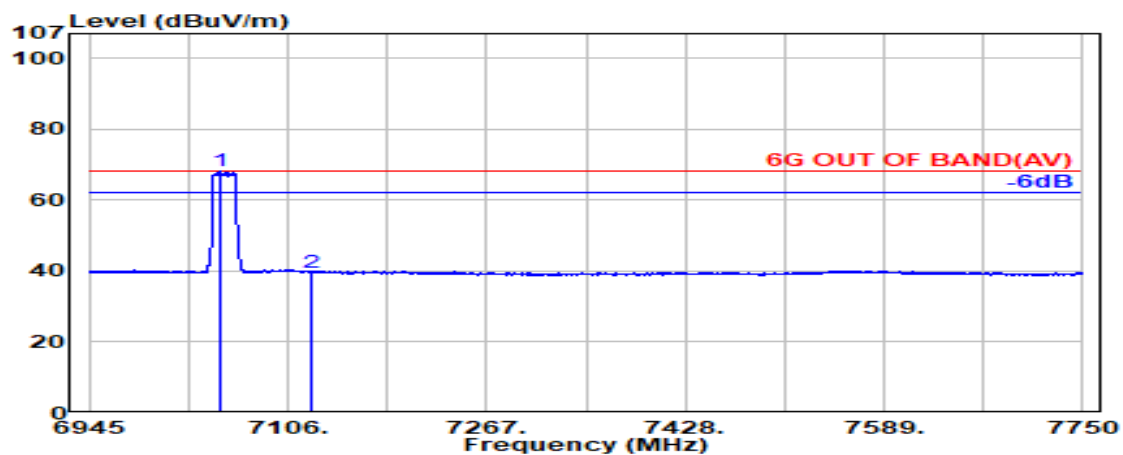

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7050.800	35.30	9.95	39.36	62.16	68.05	---	---	Average
7125.000	35.70	9.99	39.38	33.41	39.72	68.20	28.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	64
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

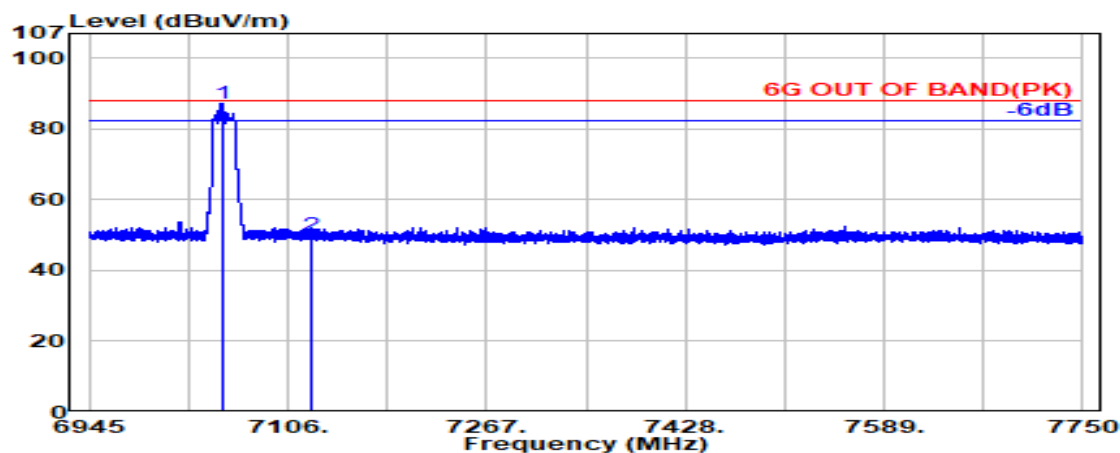

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7052.500	35.32	9.95	39.36	81.19	87.09	---	---	Peak
7125.000	35.70	9.99	39.38	43.91	50.21	88.20	37.99	Peak

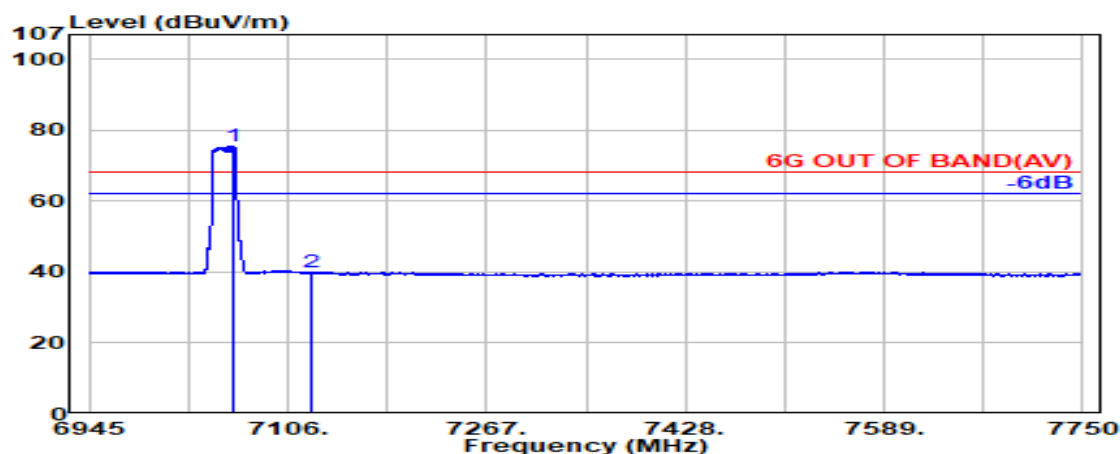

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7062.000	35.37	9.95	39.37	69.39	75.35	---	---	Average
7125.000	35.70	9.99	39.38	33.48	39.78	68.20	28.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX5965MHz

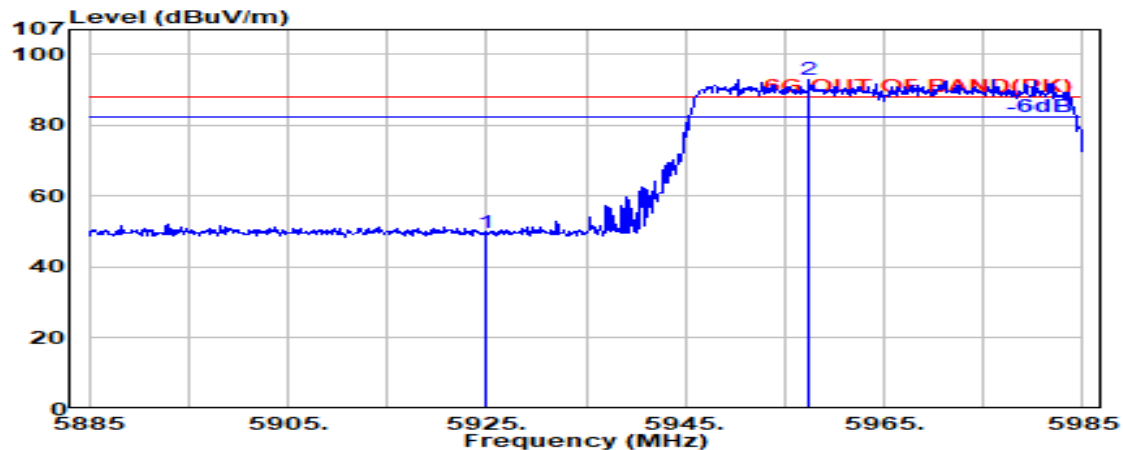

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.73	49.70	88.20	38.50	Peak
@ 5957.400	34.09	9.13	39.24	89.02	93.00	---	---	Peak

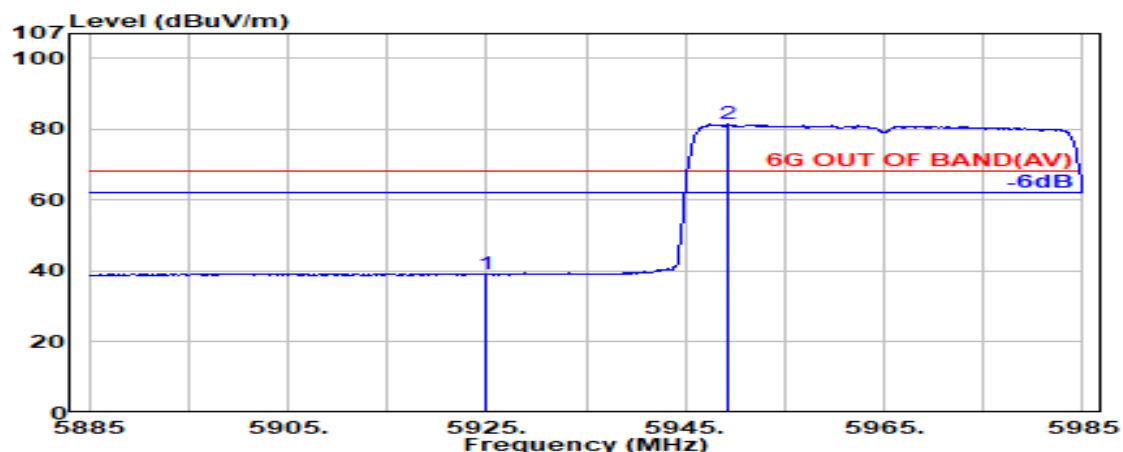

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.14	39.11	68.20	29.09	Average
@ 5949.300	34.10	9.13	39.24	77.39	81.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX5965MHz

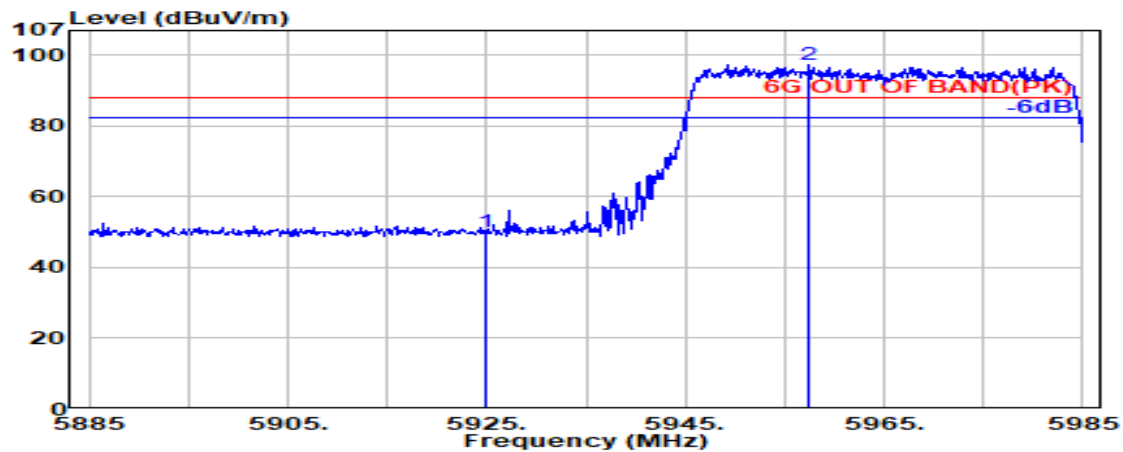

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.20	50.17	88.20	38.03	Peak
@ 5957.400	34.09	9.13	39.24	93.51	97.48	---	---	Peak

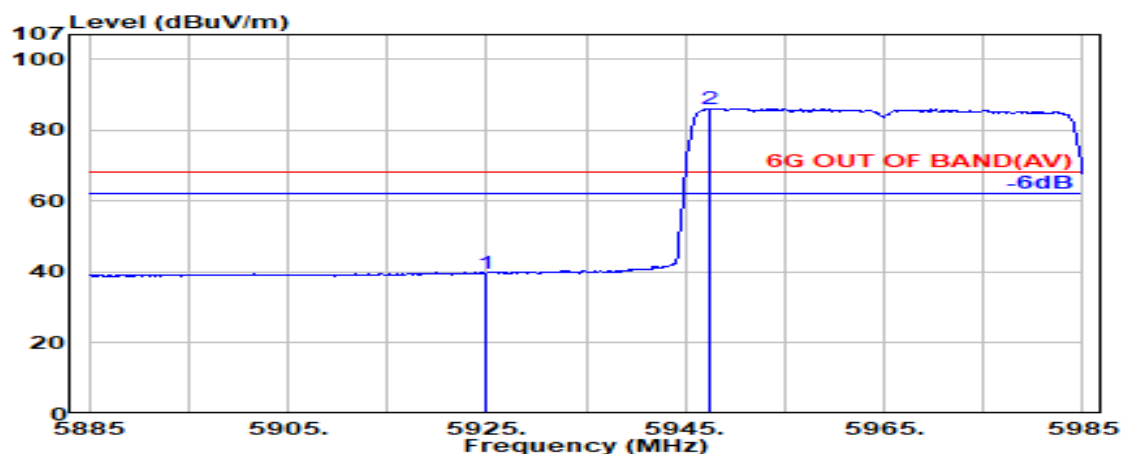

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.79	39.76	68.20	28.44	Average
@ 5947.400	34.10	9.12	39.24	82.16	86.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	66
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

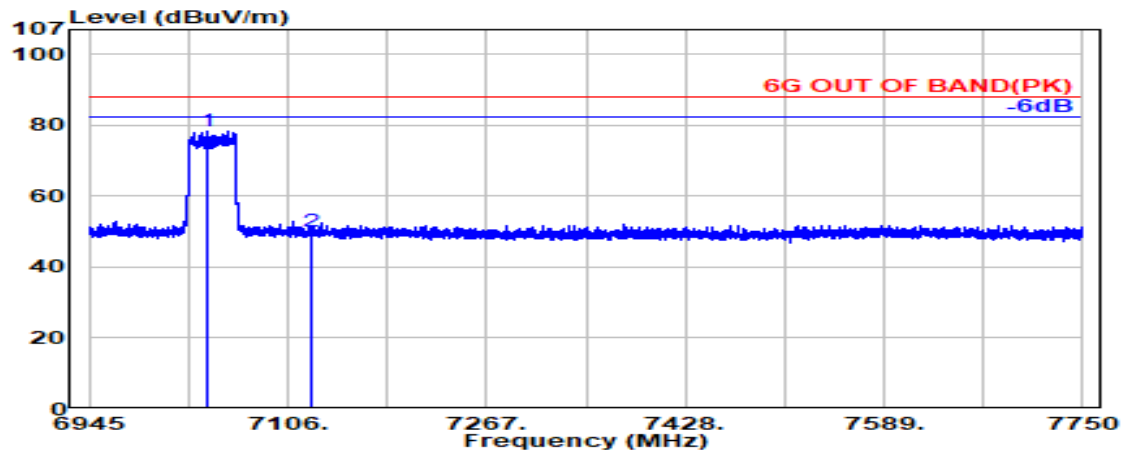

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7040.600	35.30	9.94	39.36	72.43	78.31	---	---	Peak
7125.000	35.70	9.99	39.38	43.66	49.96	88.20	38.24	Peak

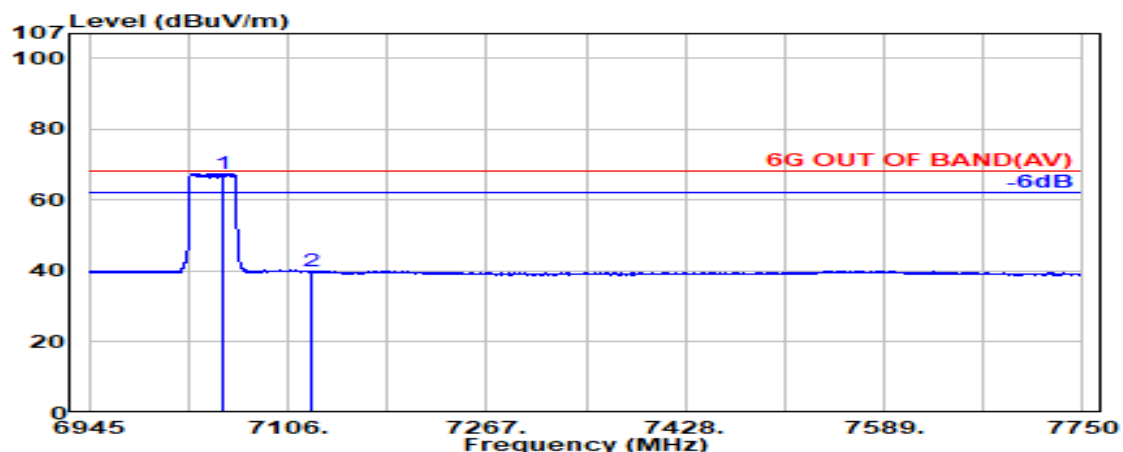

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7053.700	35.32	9.95	39.36	61.71	67.62	---	---	Average
7125.000	35.70	9.99	39.38	33.62	39.92	68.20	28.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	66
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

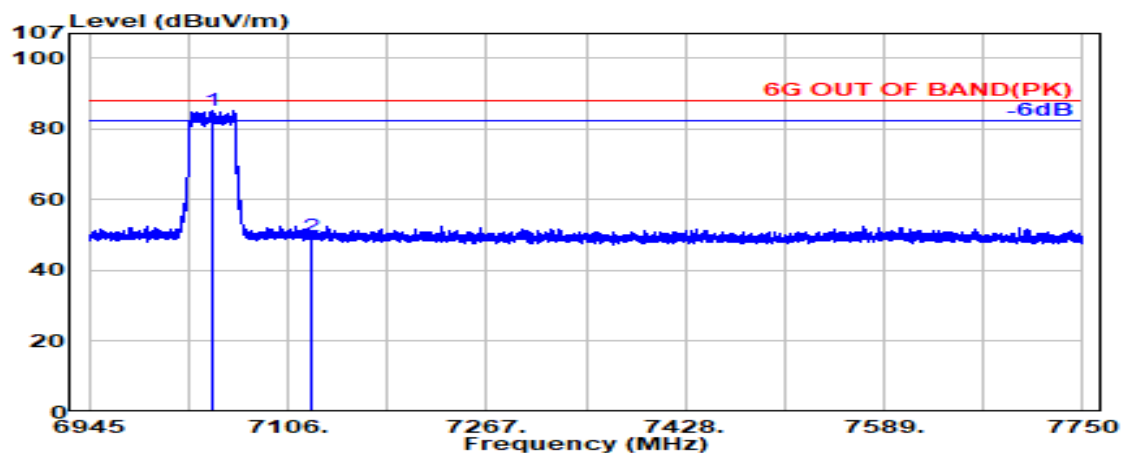

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7045.800	35.30	9.94	39.36	79.24	85.12	---	---	Peak
7125.000	35.70	9.99	39.38	43.24	49.54	88.20	38.66	Peak

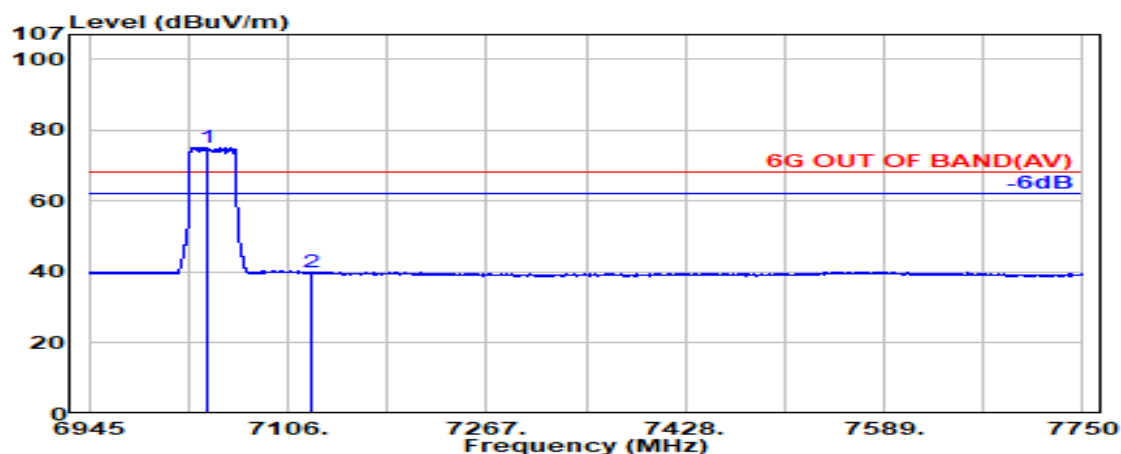

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7040.800	35.30	9.94	39.36	69.25	75.13	---	---	Average
7125.000	35.70	9.99	39.38	33.73	40.03	68.20	28.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

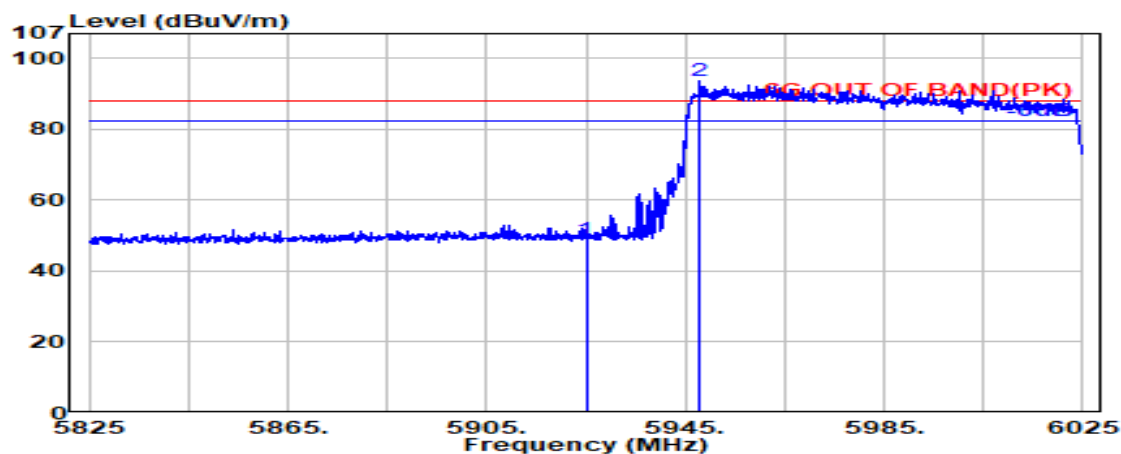

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.02	48.99	88.20	39.21	Peak
@ 5948.000	34.10	9.12	39.24	89.84	93.82	---	---	Peak

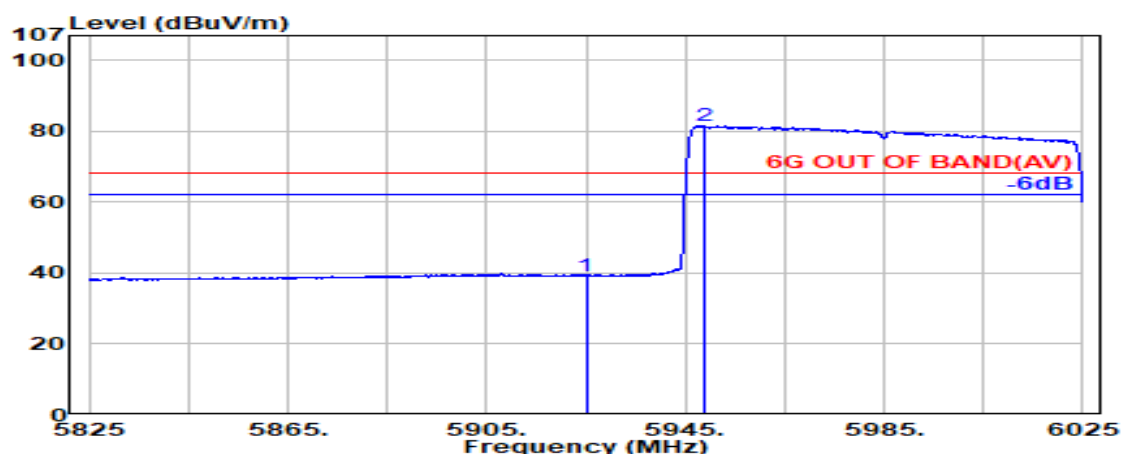

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.37	39.34	68.20	28.86	Average
@ 5948.900	34.10	9.13	39.24	77.61	81.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

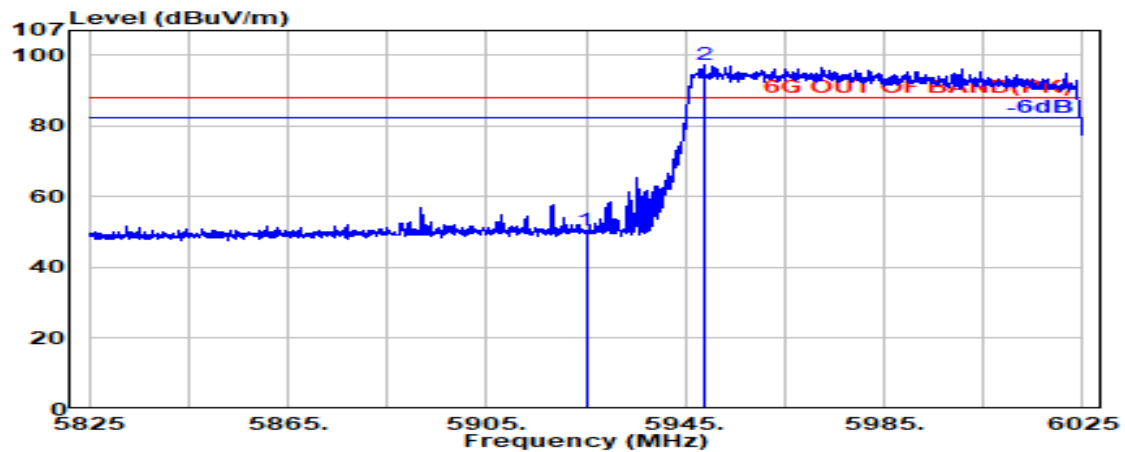

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.49	50.46	88.20	37.74	Peak
@ 5948.700	34.10	9.13	39.24	93.44	97.42	---	---	Peak

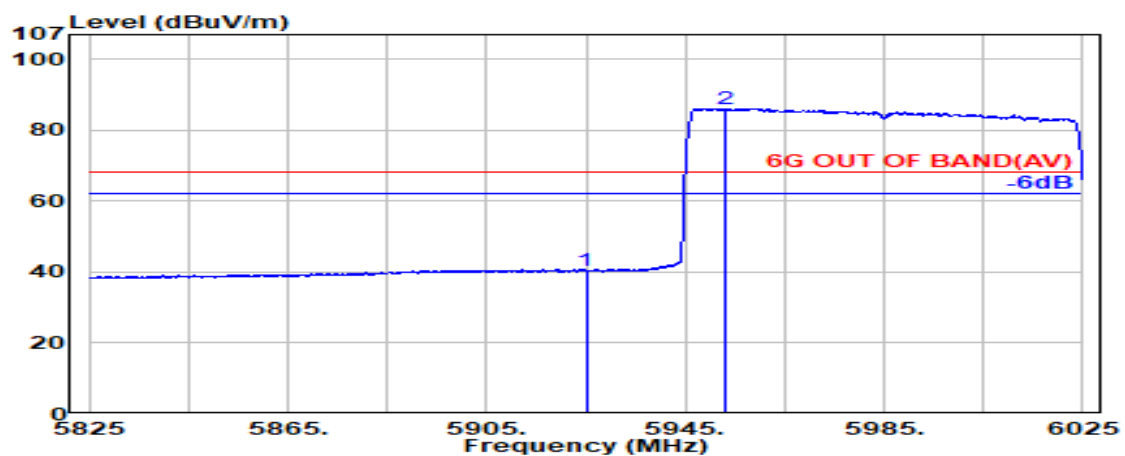

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.35	40.32	68.20	27.88	Average
@ 5953.200	34.09	9.13	39.24	82.21	86.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	S67
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

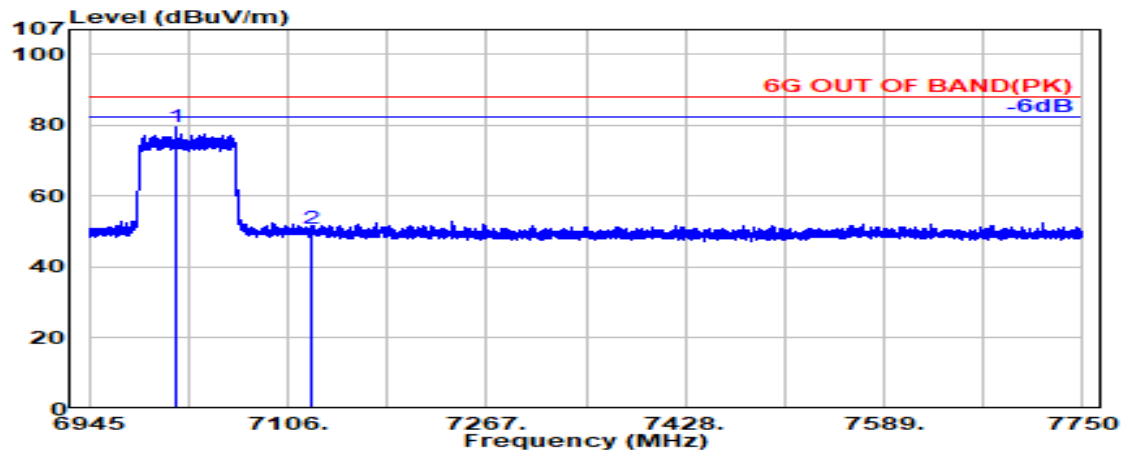

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7015.100	35.30	9.93	39.35	73.50	79.37	---	---	Peak
7125.000	35.70	9.99	39.38	44.56	50.87	88.20	37.33	Peak

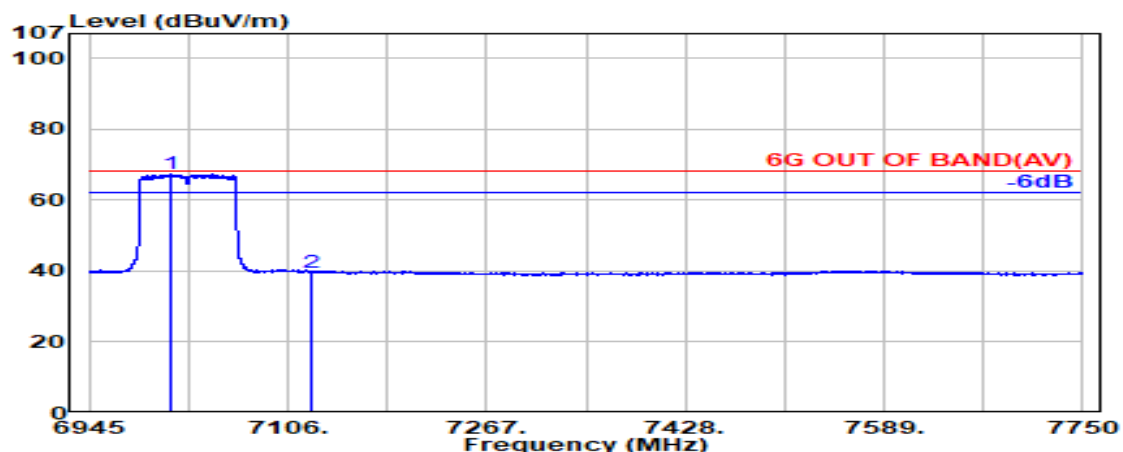

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7012.000	35.30	9.93	39.35	61.54	67.42	---	---	Average
7125.000	35.70	9.99	39.38	33.42	39.73	68.20	28.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	S67
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

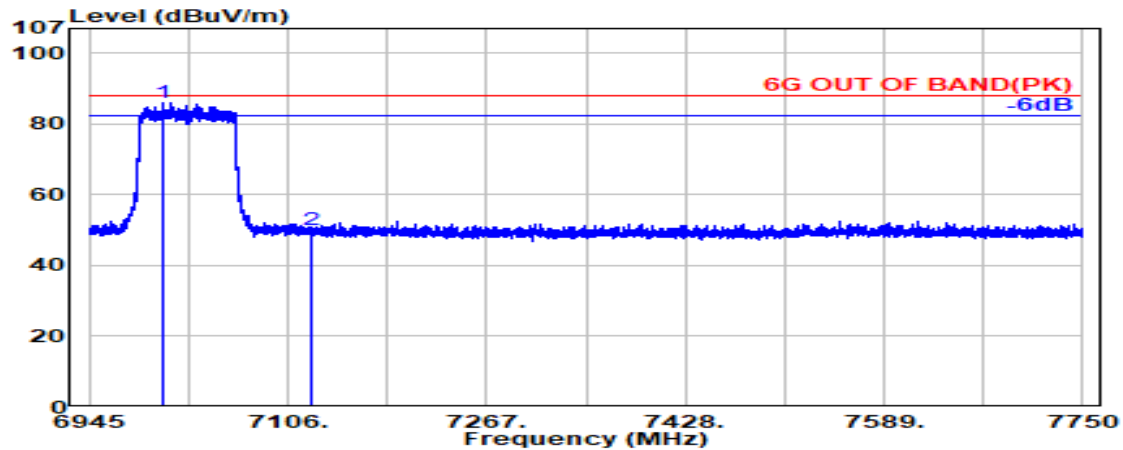

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7004.800	35.30	9.92	39.35	80.26	86.13	---	---	Peak
7125.000	35.70	9.99	39.38	43.89	50.19	88.20	38.01	Peak

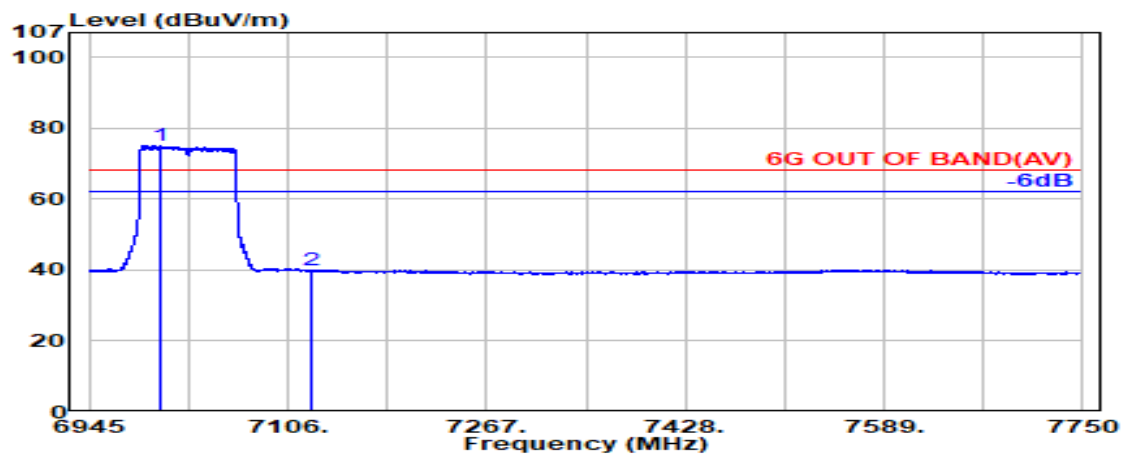

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7002.300	35.30	9.92	39.35	69.06	74.93	---	---	Average
7125.000	35.70	9.99	39.38	33.49	39.80	68.20	28.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T	RU Index	0
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

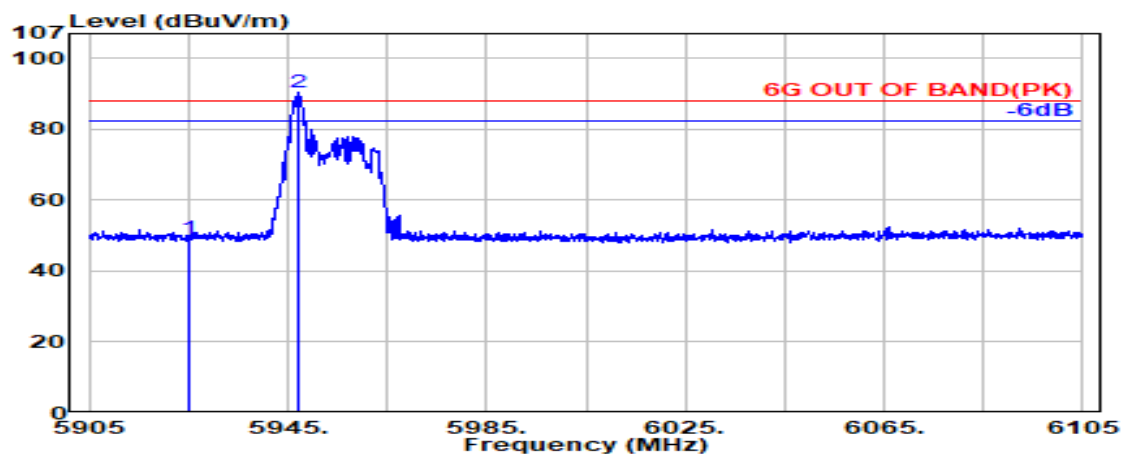

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.48	49.45	88.20	38.75	Peak
@ 5947.200	34.10	9.12	39.24	86.59	90.58	---	---	Peak

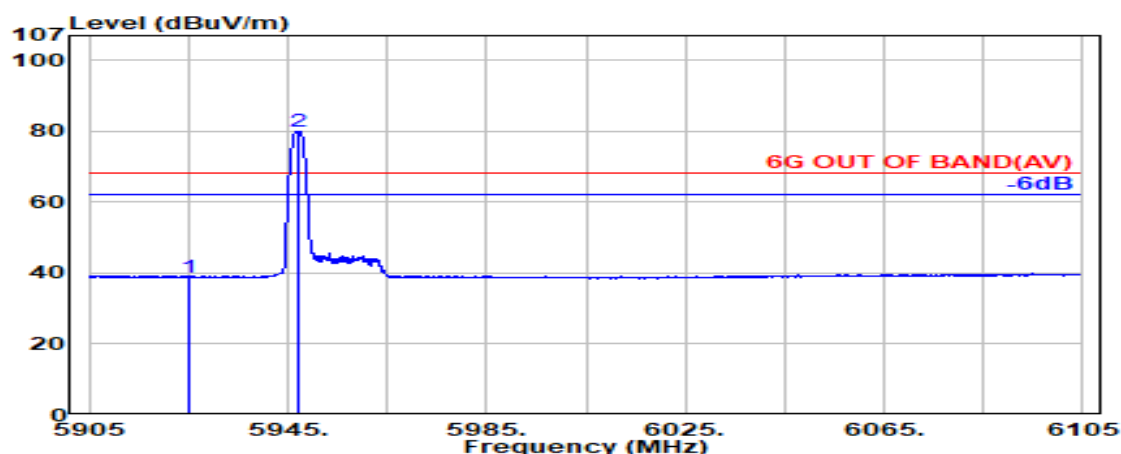

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	34.93	38.90	68.20	29.30	Average
@ 5947.000	34.10	9.12	39.24	76.14	80.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	0
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

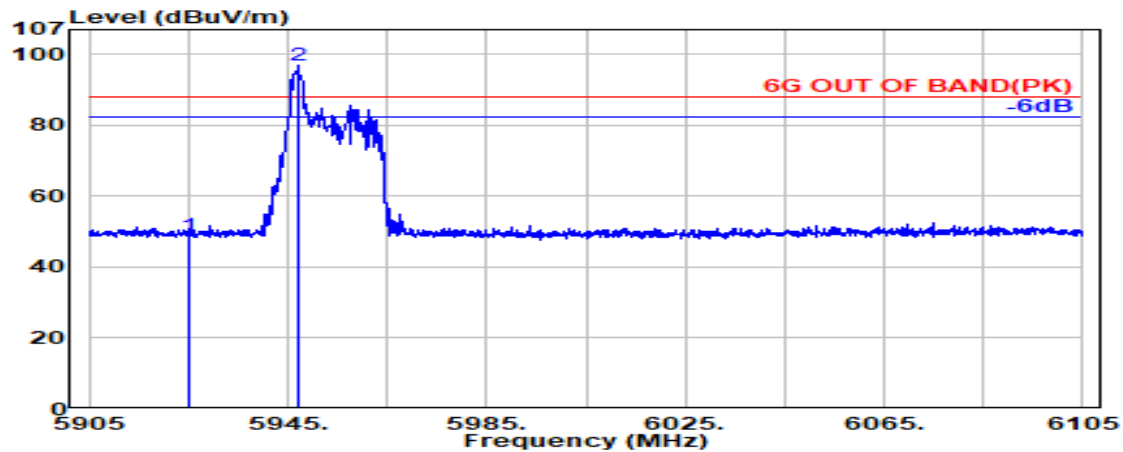

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	44.81	48.78	88.20	39.42	Peak
@ 5947.100	34.10	9.12	39.24	92.74	96.73	---	---	Peak

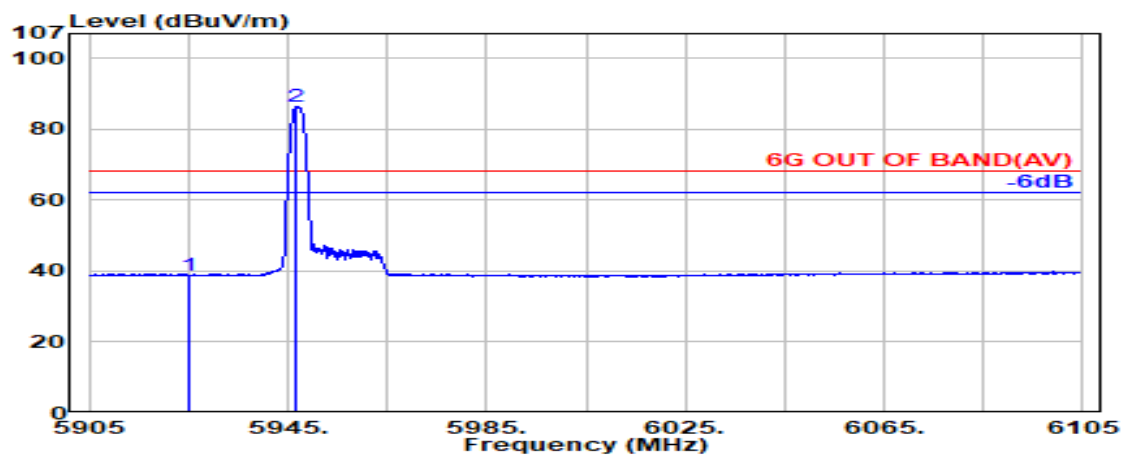

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	34.98	38.95	68.20	29.25	Average
@ 5946.600	34.10	9.12	39.24	82.41	86.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T	RU Index	W36
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

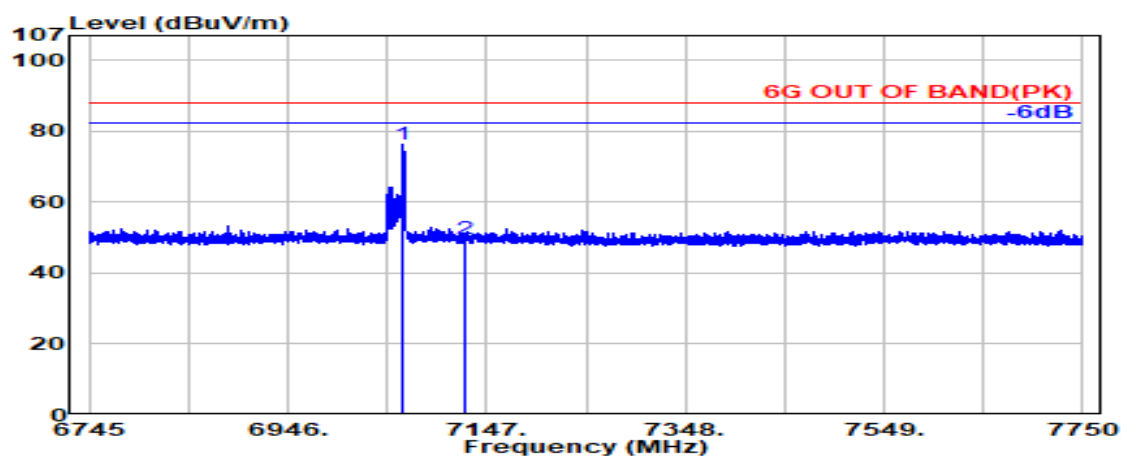

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7062.913	35.38	9.95	39.37	70.27	76.24	---	---	Peak
@ 7125.000	35.70	9.99	39.38	43.18	49.49	88.20	38.71	Peak

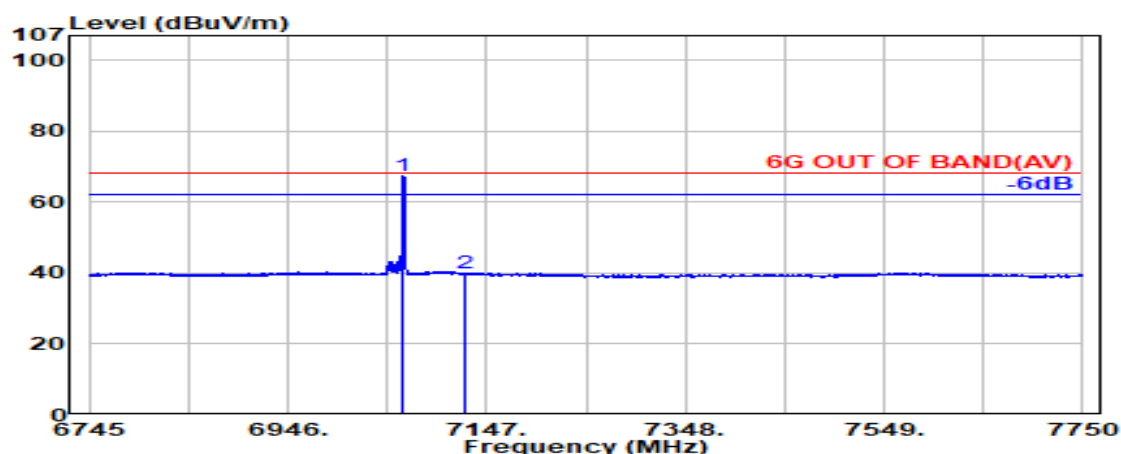

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7062.794	35.38	9.95	39.37	61.44	67.41	---	---	Average
@ 7125.000	35.70	9.99	39.38	33.59	39.89	68.20	28.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	W36
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

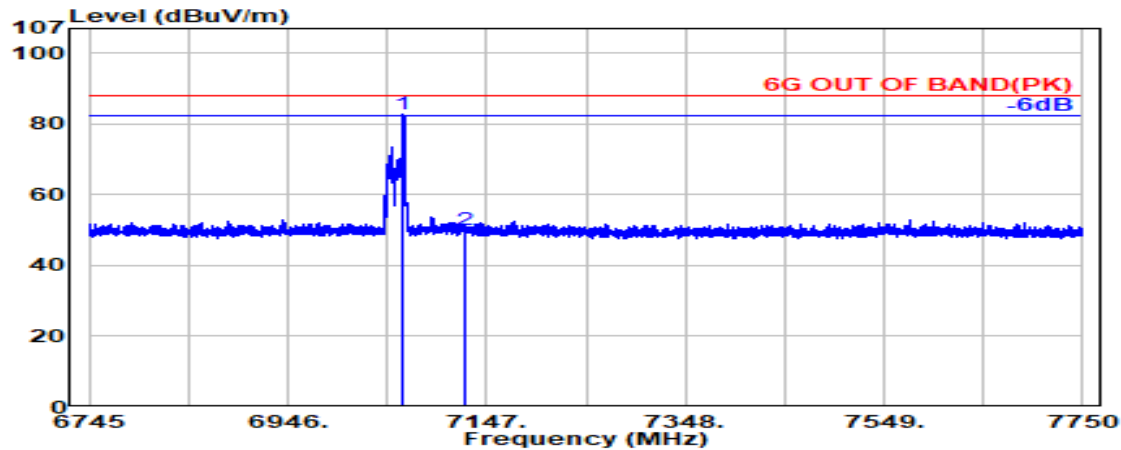

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
7062.675	35.38	9.95	39.37	76.73	82.69	---	---	Peak
@ 7125.000	35.70	9.99	39.38	43.87	50.17	88.20	38.03	Peak

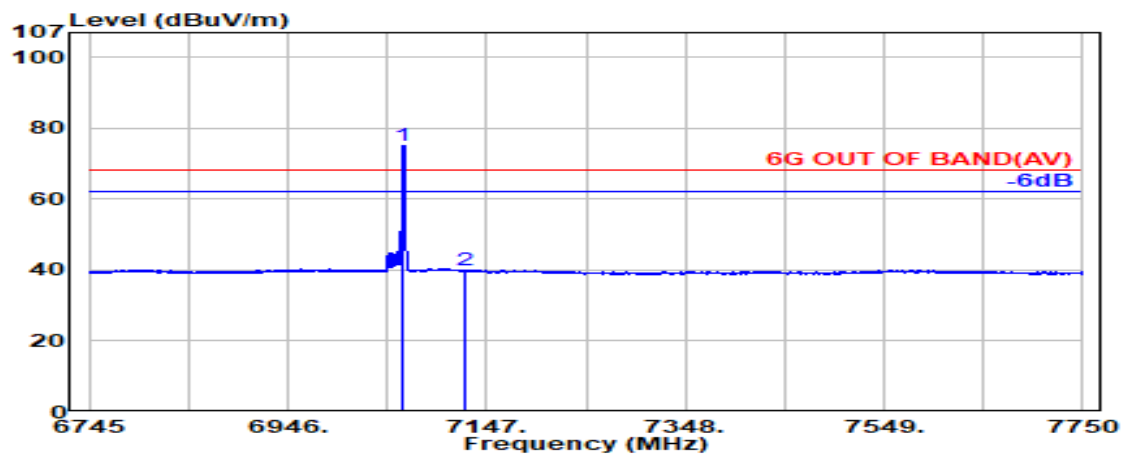

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
7063.032	35.38	9.95	39.37	69.21	75.18	---	---	Average
@ 7125.000	35.70	9.99	39.38	33.87	40.18	68.20	28.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	52T	RU Index	37
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

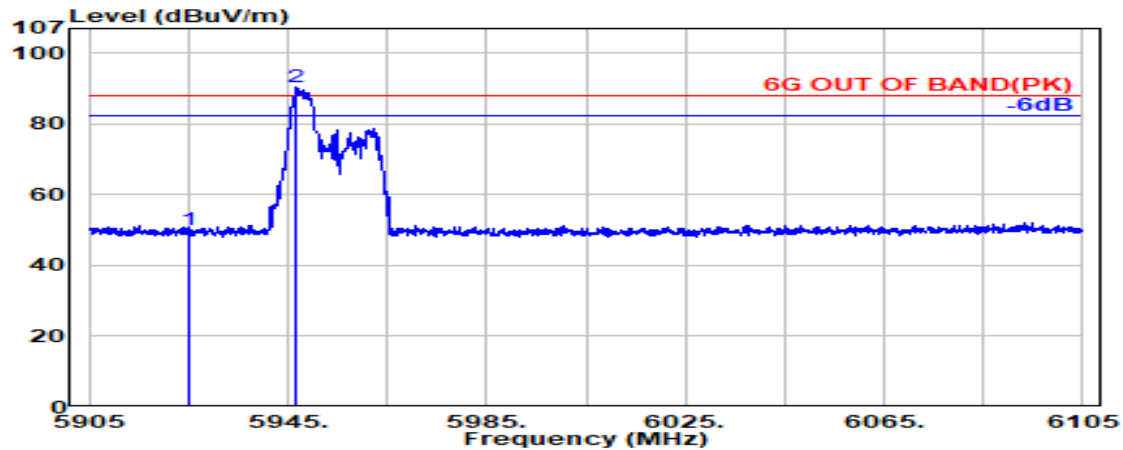

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.11	50.08	88.20	38.12	Peak
@ 5946.700	34.10	9.12	39.24	86.32	90.31	---	---	Peak

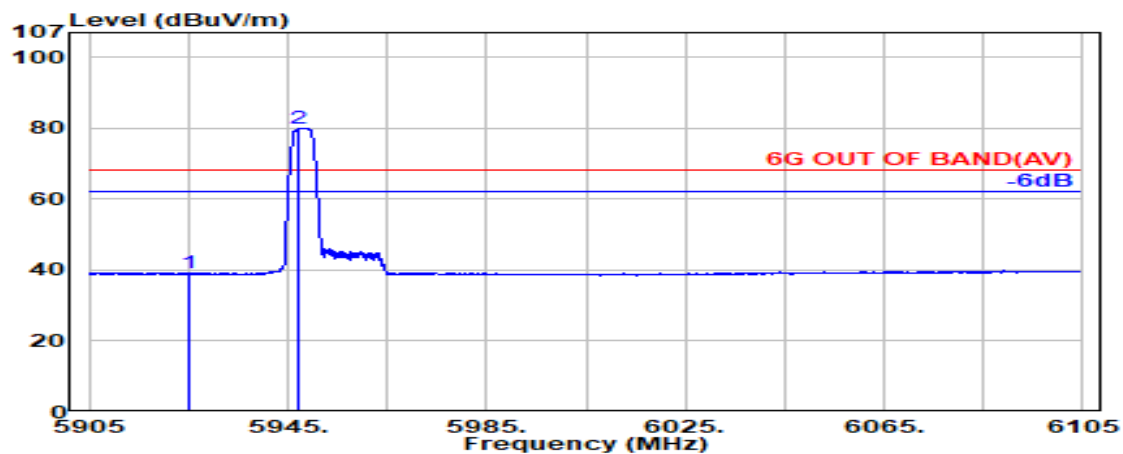

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	35.06	39.03	68.20	29.17	Average
@ 5947.100	34.10	9.12	39.24	76.08	80.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	37
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

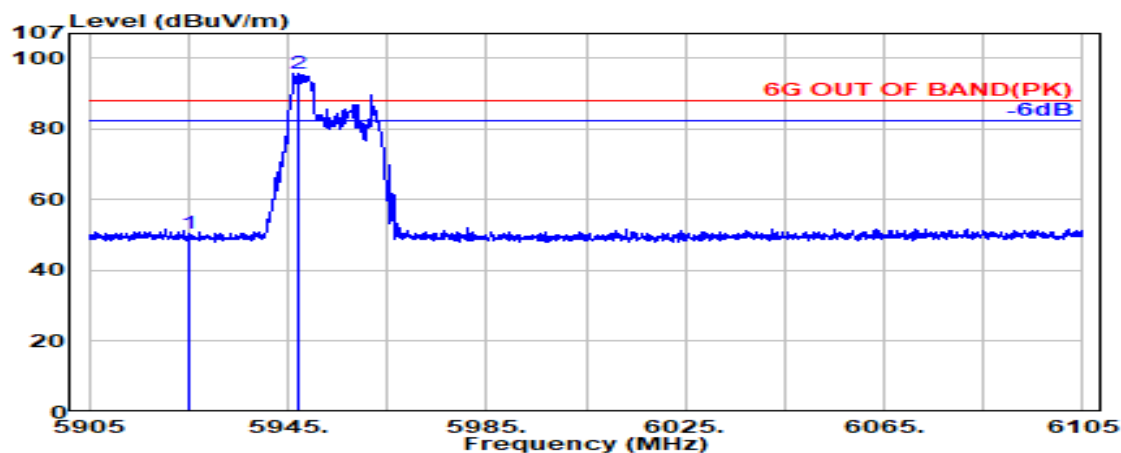

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.46	50.43	88.20	37.77	Peak
@ 5947.100	34.10	9.12	39.24	91.69	95.68	---	---	Peak

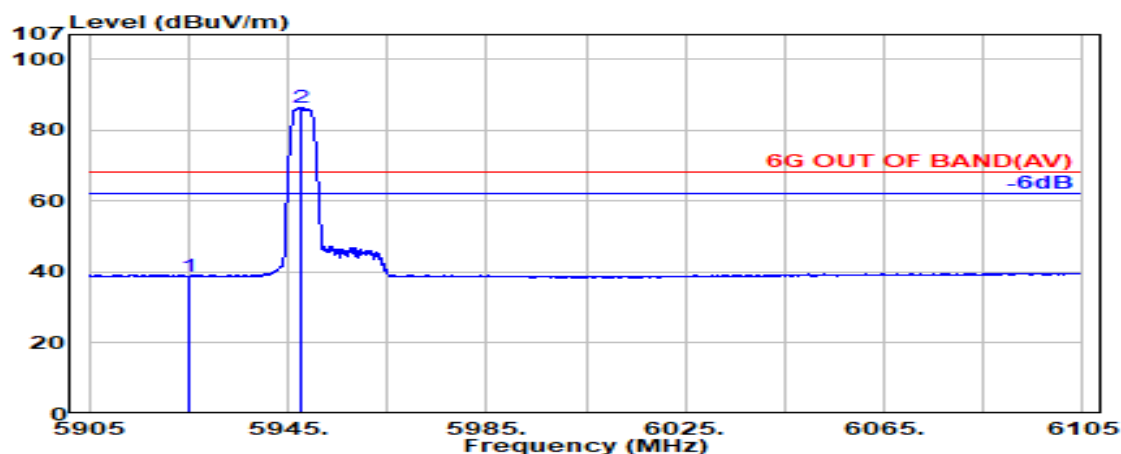

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	34.82	38.79	68.20	29.41	Average
@ 5947.400	34.10	9.12	39.24	82.43	86.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	52T	RU Index	W52
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

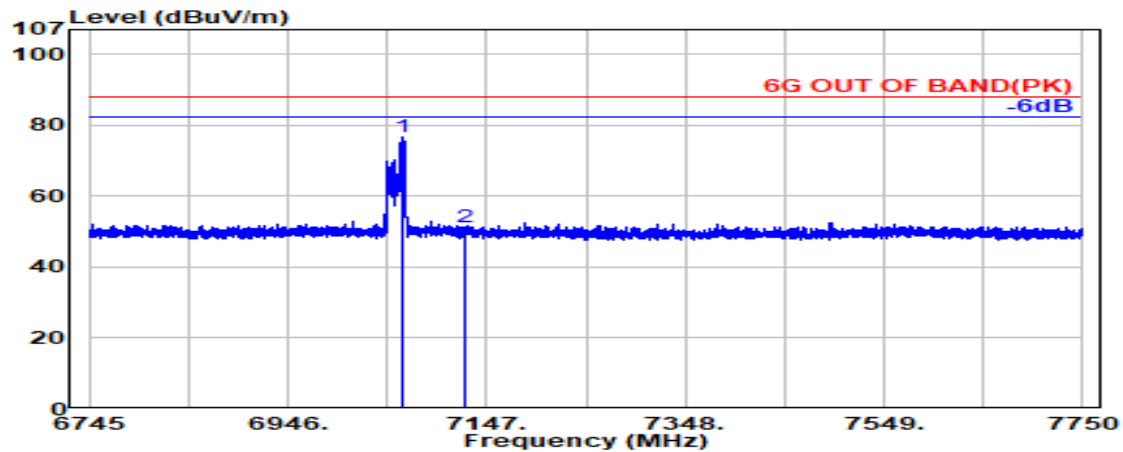

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7061.961	35.37	9.95	39.37	70.77	76.73	---	---	Peak
7125.000	35.70	9.99	39.38	44.91	51.21	88.20	36.99	Peak

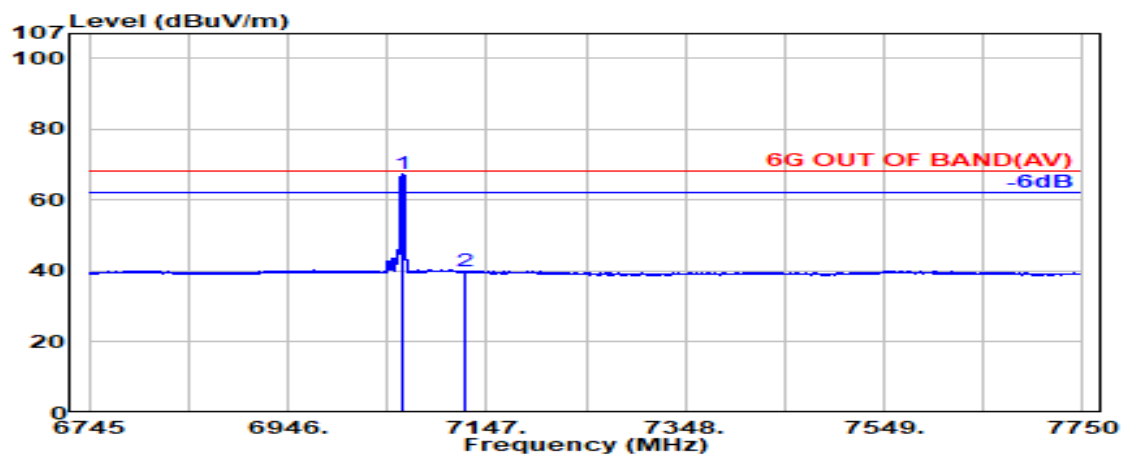

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7062.556	35.38	9.95	39.37	61.65	67.61	---	---	Average
7125.000	35.70	9.99	39.38	33.56	39.86	68.20	28.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	W52
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

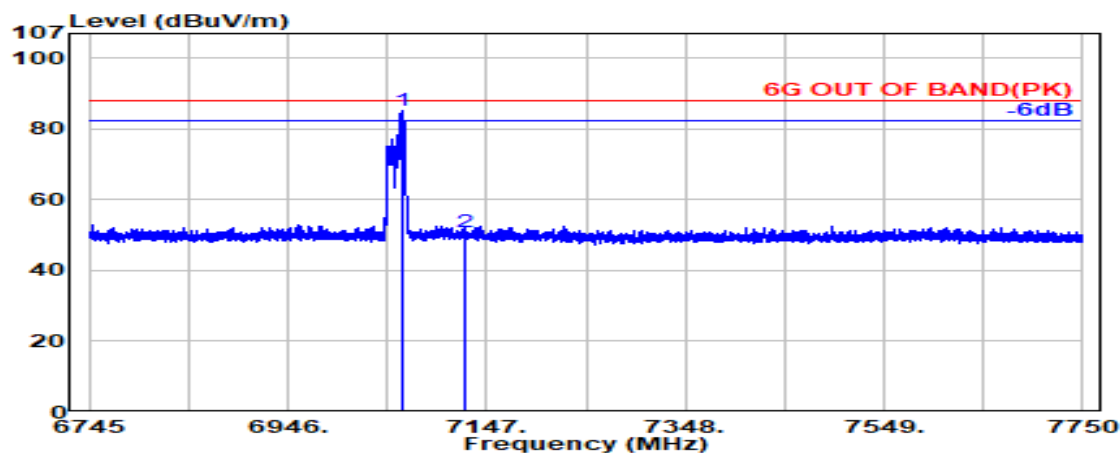

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7060.772	35.36	9.95	39.37	79.08	85.03	---	---	Peak
7125.000	35.70	9.99	39.38	44.61	50.91	88.20	37.29	Peak

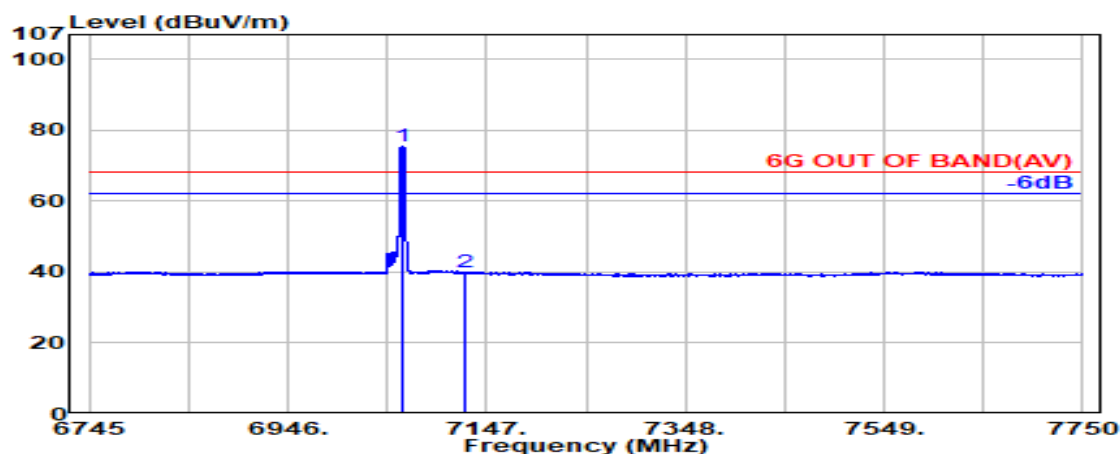

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7061.724	35.37	9.95	39.37	69.58	75.54	---	---	Average
7125.000	35.70	9.99	39.38	33.49	39.80	68.20	28.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.