

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	148
A.2.3 Emissions in Non-restricted Frequency Bands.....	163
A.3 26dB/6dB BANDWIDTH	164
A.3.1 26dB/6dB Bandwidth Result	164
A.3.2 Measurement Plots	169
A.4 MAXIMUM OUTPUT POWER	191
A.4.1 Average Output Power	191
A.4.2 Measurement Plots	195
A.5 POWER SPECTRAL DENSITY	204
A.5.1 Power Spectral Density Result	204
A.5.2 Measurement Plots	208
A.6 FREQUENCY STABILITY	228
A.6.1 Frequency stability Result	228

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

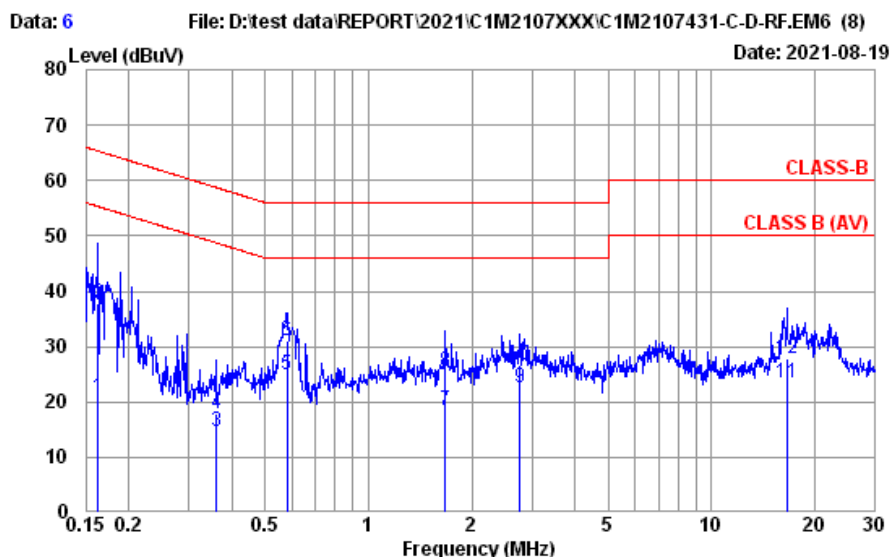

Site No. : No.8 Shielded Room Data No. : 6
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : NEUTRAL
Environment : 26°C / 52% Engineer : Roy Hung
EUT Model : 17Z95P Test Rating : 120Vac/60
Test Mode : Operating
INPAQ


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	0.41	20.69	55.34	34.65	Average
2	0.162	10.40	0.03	9.85	17.39	37.67	65.34	27.67	QP
3	0.360	10.37	0.03	9.85	-5.72	14.53	48.74	34.21	Average
4	0.360	10.37	0.03	9.85	-2.37	17.88	58.74	40.86	QP
5	0.579	10.37	0.03	9.85	4.63	24.88	46.00	21.12	Average
6	0.579	10.37	0.03	9.85	10.82	31.07	56.00	24.93	QP
7	1.671	10.40	0.05	9.86	-1.79	18.52	46.00	27.48	Average
8	1.671	10.40	0.05	9.86	5.22	25.53	56.00	30.47	QP
9	2.765	10.43	0.07	9.86	2.26	22.62	46.00	23.38	Average
10	2.765	10.43	0.07	9.86	6.20	26.56	56.00	29.44	QP
11	16.573	10.99	0.18	9.92	2.27	23.36	50.00	26.64	Average
12	16.573	10.99	0.18	9.92	6.66	27.75	60.00	32.25	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

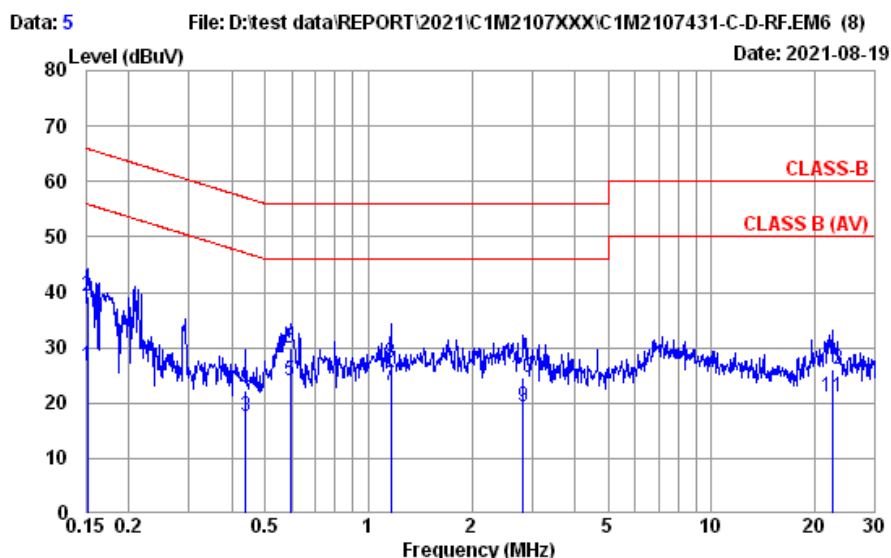

Site No. : No.8 Shielded Room Data No. : 5
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 26°C / 52% Engineer : Roy Hung
EUT Model : 17Z95P Test Rating : 120Vac/60
Test Mode : Operating
INPAQ


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	6.50	26.78	55.91	29.13	Average
2	0.152	10.40	0.03	9.85	18.89	39.17	65.91	26.74	QP
3	0.437	10.37	0.03	9.85	-2.59	17.66	47.11	29.45	Average
4	0.437	10.37	0.03	9.85	2.10	22.35	57.11	34.76	QP
5	0.592	10.37	0.03	9.85	3.67	23.92	46.00	22.08	Average
6	0.592	10.37	0.03	9.85	9.58	29.83	56.00	26.17	QP
7	1.160	10.38	0.04	9.85	2.92	23.19	46.00	22.81	Average
8	1.160	10.38	0.04	9.85	7.01	27.28	56.00	28.72	QP
9	2.824	10.41	0.08	9.86	-0.98	19.37	46.00	26.63	Average
10	2.824	10.41	0.08	9.86	4.39	24.74	56.00	31.26	QP
11	22.655	10.80	0.21	9.96	0.02	20.99	50.00	29.01	Average
12	22.655	10.80	0.21	9.96	5.04	26.01	60.00	33.99	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

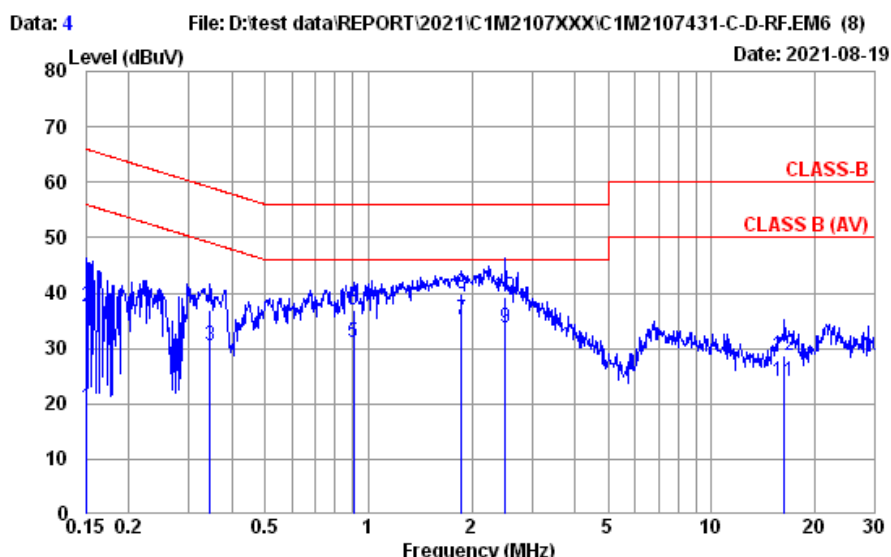

Site No. : No.8 Shielded Room Data No. : 4
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EMI432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LIIE
Environment : 26°C / 52% Engineer : Roy Hung
EUT Model : 17Z95P Test Rating : 120Vac/60
Test Mode : Operating
LUXSHARE


	Freq. (MHz)	AMFI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.40	0.03	9.85	-1.08	19.20	55.96	36.76	Average
2	0.151	10.40	0.03	9.85	17.25	37.53	65.96	28.43	QP
3	0.345	10.37	0.03	9.85	10.36	30.61	49.09	18.48	Average
4	0.345	10.37	0.03	9.85	16.59	36.84	59.09	22.25	QP
5	0.904	10.38	0.04	9.85	10.84	31.11	46.00	14.89	Average
6	0.904	10.38	0.04	9.85	16.64	36.91	56.00	19.09	QP
7	1.868	10.40	0.06	9.86	14.74	35.06	46.00	10.94	Average
8	1.868	10.40	0.06	9.86	19.64	39.96	56.00	16.04	QP
9	2.500	10.41	0.07	9.86	13.42	33.76	46.00	12.24	Average
10	2.500	10.41	0.07	9.86	18.86	39.20	56.00	16.80	QP
11	16.312	10.71	0.18	9.92	3.23	24.04	50.00	25.96	Average
12	16.312	10.71	0.18	9.92	7.96	28.77	60.00	31.23	QP

Remarks: 1. Emission Level= AMFI Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/08/19	Temp./Hum.	26°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

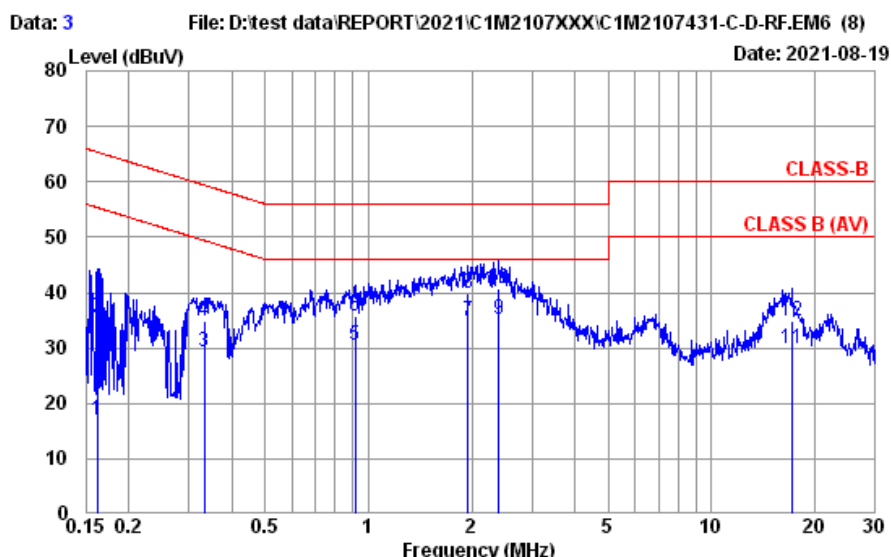

Site No. : No.8 Shielded Room Data No. : 3
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : NEUTRAL
Environment : 26°C / 52% Engineer : Roy Hung
EUT Model : 17Z95P Test Rating : 120Vac/60
Test Mode : Operating
LUXSHARE

	Freq. (MHz)	AMFI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.40	0.03	9.85	-3.30	16.98	55.38	38.40	Average
2	0.162	10.40	0.03	9.85	15.13	35.41	65.38	29.97	QP
3	0.332	10.38	0.03	9.85	9.05	29.31	49.40	20.09	Average
4	0.332	10.38	0.03	9.85	14.74	35.00	59.40	24.40	QP
5	0.914	10.38	0.04	9.85	10.16	30.43	46.00	15.57	Average
6	0.914	10.38	0.04	9.85	15.55	35.82	56.00	20.18	QP
7	1.949	10.41	0.06	9.86	14.56	34.89	46.00	11.11	Average
8	1.949	10.41	0.06	9.86	19.56	39.89	56.00	16.11	QP
9	2.396	10.42	0.07	9.86	14.81	35.16	46.00	10.84	Average
10	2.396	10.42	0.07	9.86	20.32	40.67	56.00	15.33	QP
11	17.199	11.01	0.18	9.92	8.86	29.97	50.00	20.03	Average
12	17.199	11.01	0.18	9.92	13.79	34.90	60.00	25.10	QP

Remarks: 1. Emission Level= AMFI Factor + Cable Loss + Pulse Att. + Reading.

A.2 RADIATED EMISSION

Test Date	2021/08/13~20	Temp./Hum.	23~26°C /55~59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #2 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
98.870	16.33	2.26	26.30	40.19	32.48	43.50	11.02	Peak
169.680	15.34	3.07	25.92	41.42	33.91	43.50	9.59	Peak
235.640	17.38	3.72	25.76	49.61	44.95	46.00	1.05	Peak
593.570	24.23	6.75	27.42	37.25	40.81	46.00	5.19	Peak
885.540	26.25	8.35	27.09	36.39	43.90	46.00	2.10	Peak
979.630	26.96	8.86	26.75	28.18	37.25	54.00	16.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.24	26.51	40.33	37.58	40.00	2.42	Peak
119.240	17.95	2.52	26.17	47.24	41.54	43.50	1.96	Peak
233.700	17.24	3.70	25.76	44.31	39.49	46.00	6.51	Peak
565.440	23.91	6.66	27.35	35.72	38.94	46.00	7.06	Peak
762.350	25.54	7.63	27.37	36.36	42.16	46.00	3.84	Peak
982.540	26.99	8.88	26.75	28.89	38.01	54.00	15.99	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

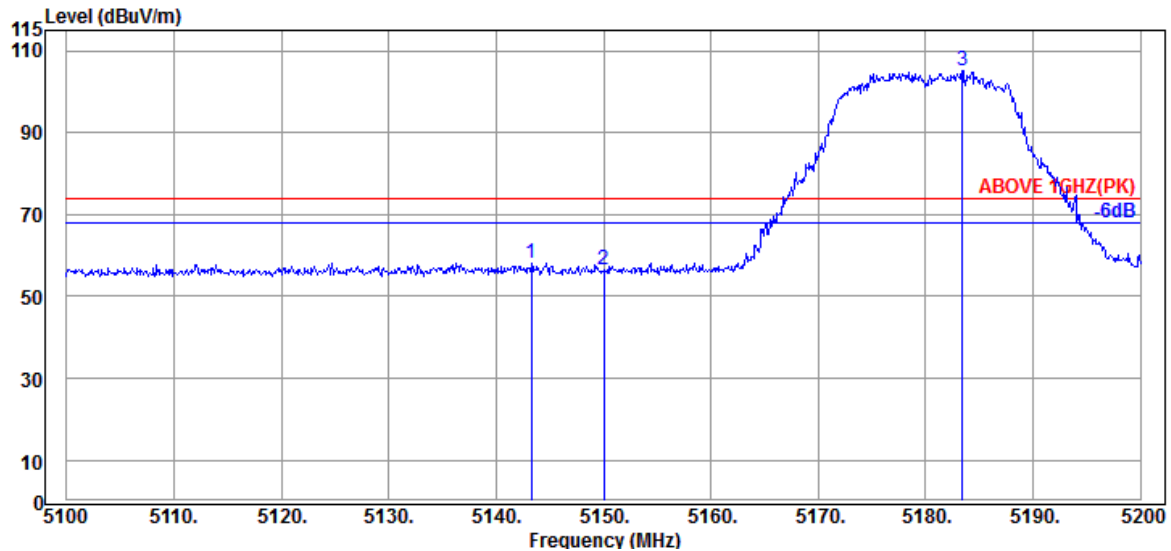

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.300	34.20	10.70	34.36	47.67	58.21	74.00	15.79	Peak
5150.000	34.20	10.70	34.35	45.79	56.34	74.00	17.66	Peak
@ 5183.400	34.20	10.72	34.34	94.49	105.07	---	---	Peak

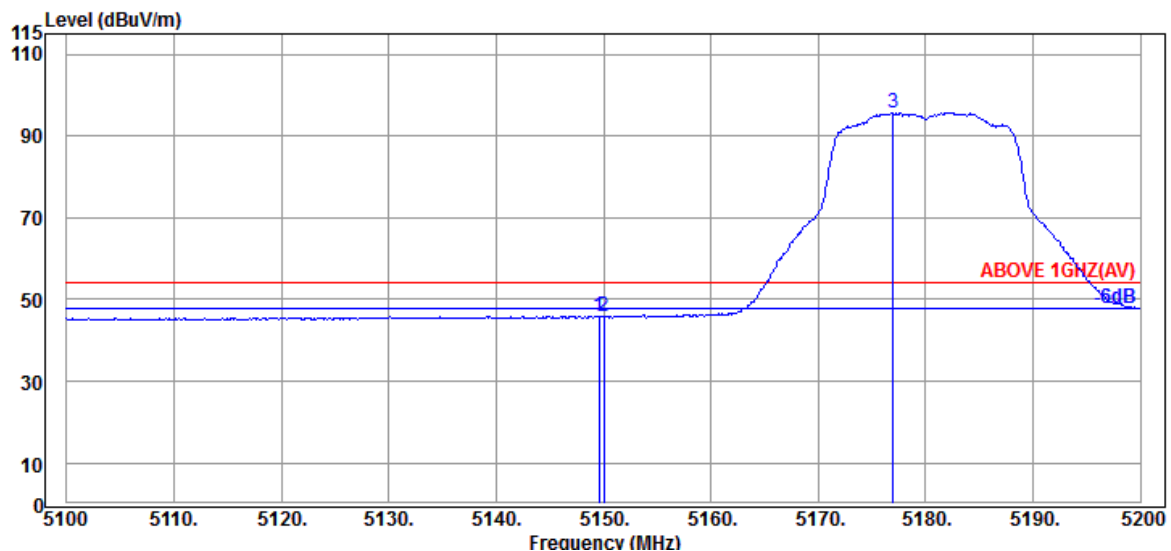

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	10.70	34.35	35.35	45.90	54.00	8.10	Average
5150.000	34.20	10.70	34.35	35.09	45.64	54.00	8.36	Average
@ 5177.000	34.20	10.72	34.34	85.11	95.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

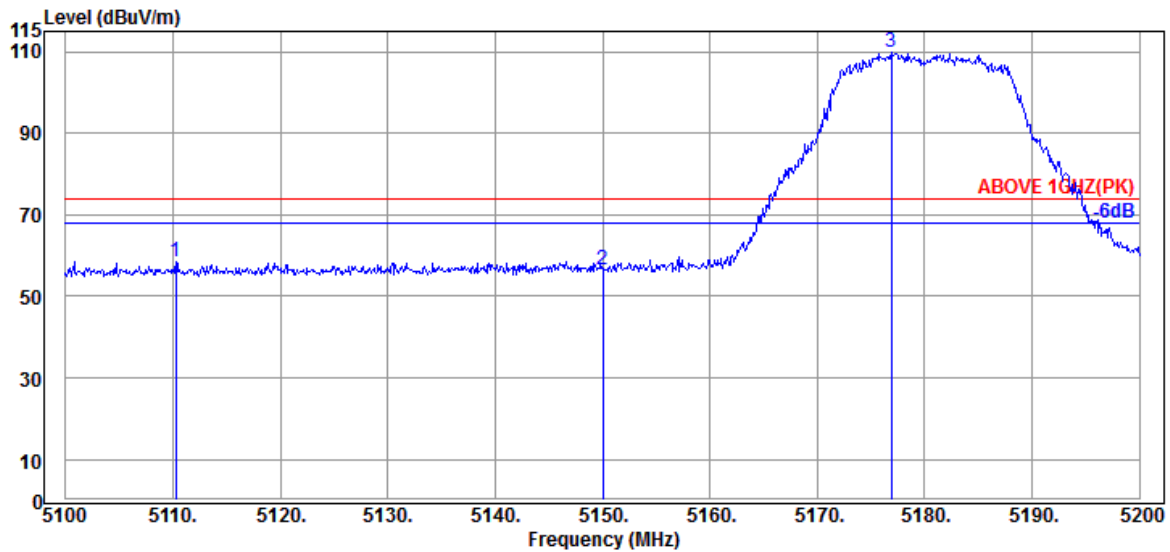

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.300	34.10	10.68	34.36	48.25	58.67	74.00	15.33	Peak
5150.000	34.20	10.70	34.35	46.16	56.71	74.00	17.29	Peak
@ 5176.900	34.20	10.72	34.34	99.36	109.94	---	---	Peak

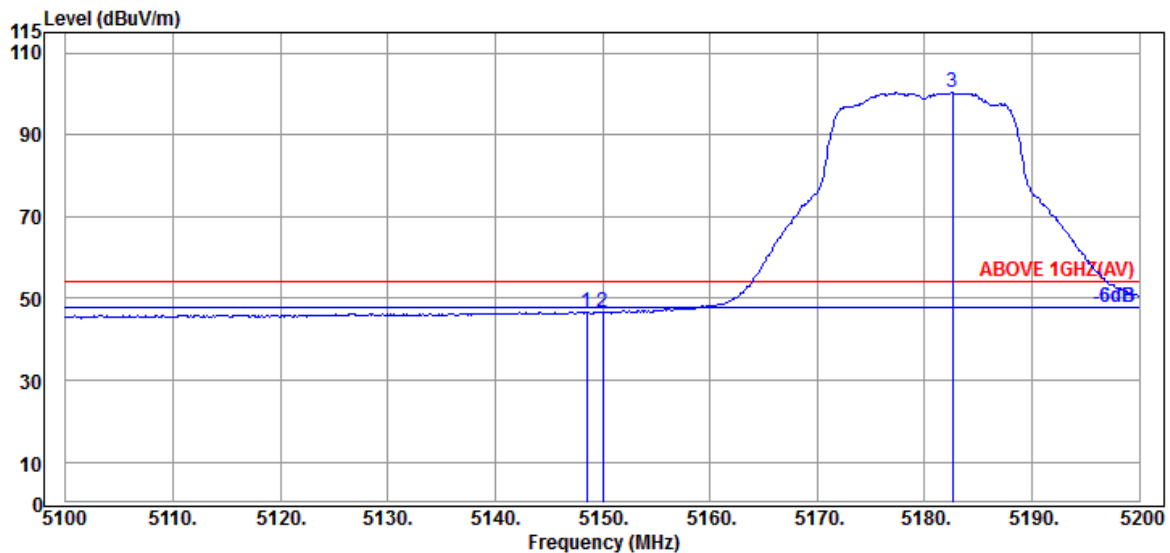

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	34.20	10.70	34.35	36.18	46.73	54.00	7.27	Average
5150.000	34.20	10.70	34.35	36.07	46.62	54.00	7.38	Average
@ 5182.600	34.20	10.72	34.34	89.68	100.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

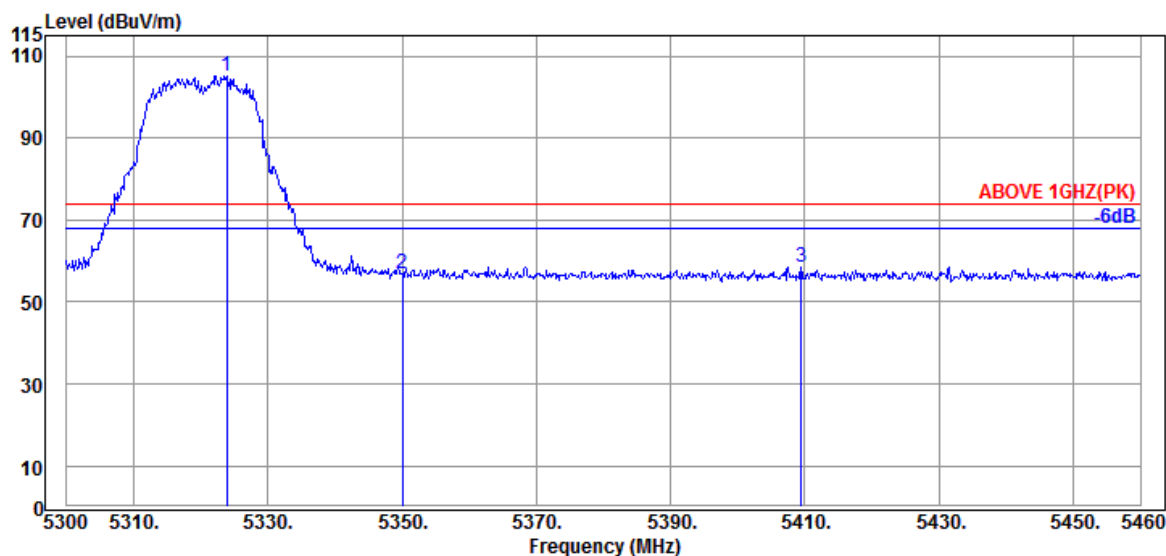

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.57	10.83	34.28	94.06	105.18	---	---	Peak
5350.080	34.60	10.83	34.27	45.75	56.91	74.00	17.09	Peak
5409.440	34.65	10.87	34.26	47.40	58.66	74.00	15.34	Peak

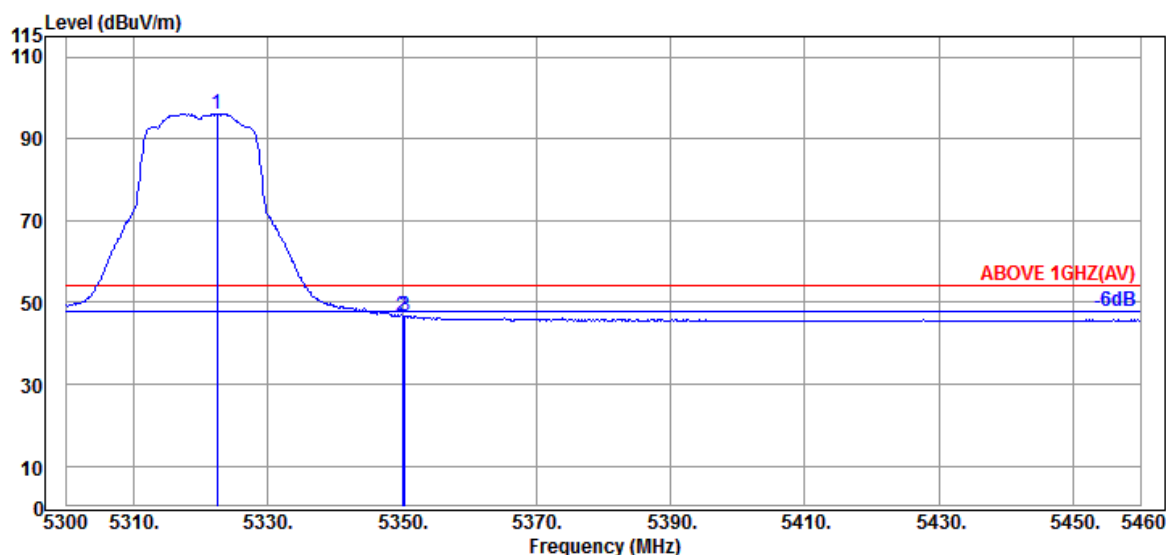

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	34.53	10.83	34.28	85.01	96.09	---	---	Average
5350.080	34.60	10.83	34.27	35.59	46.75	54.00	7.25	Average
5350.400	34.60	10.83	34.27	35.55	46.71	54.00	7.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

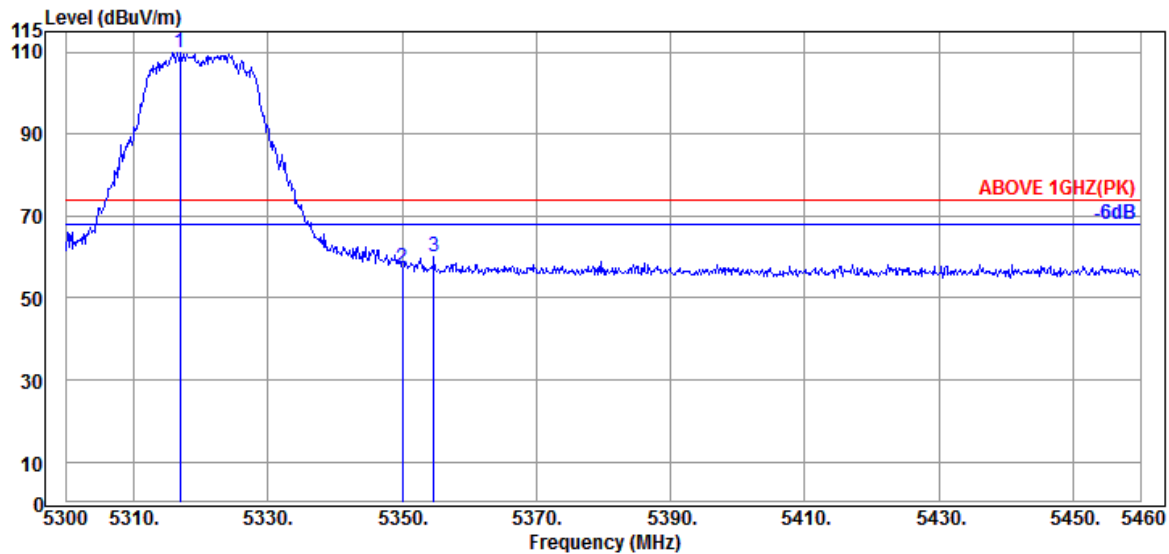

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.960	34.53	10.81	34.29	98.89	109.94	---	---	Peak
5350.080	34.60	10.83	34.27	45.99	57.15	74.00	16.85	Peak
5354.720	34.63	10.83	34.27	48.90	60.09	74.00	13.91	Peak

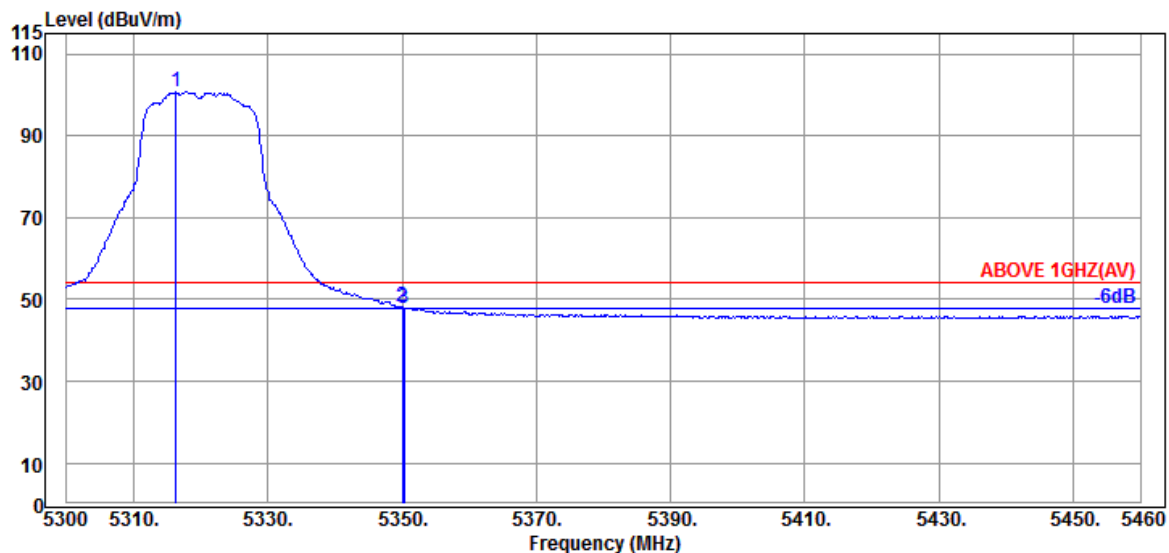

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.320	34.53	10.81	34.29	89.81	100.86	---	---	Average
5350.080	34.60	10.83	34.27	37.02	48.18	54.00	5.82	Average
5350.240	34.60	10.83	34.27	36.73	47.89	54.00	6.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

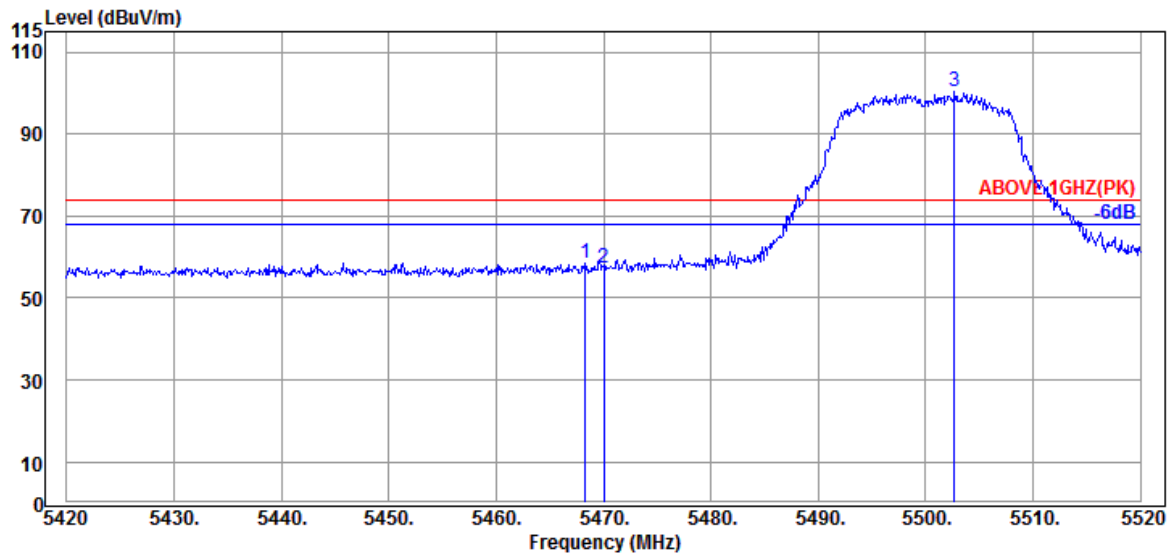

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.47	10.91	34.24	47.37	58.51	74.00	15.49	Peak
5470.000	34.47	10.91	34.24	46.00	57.14	74.00	16.86	Peak
@ 5502.700	34.40	10.93	34.24	89.28	100.37	---	---	Peak

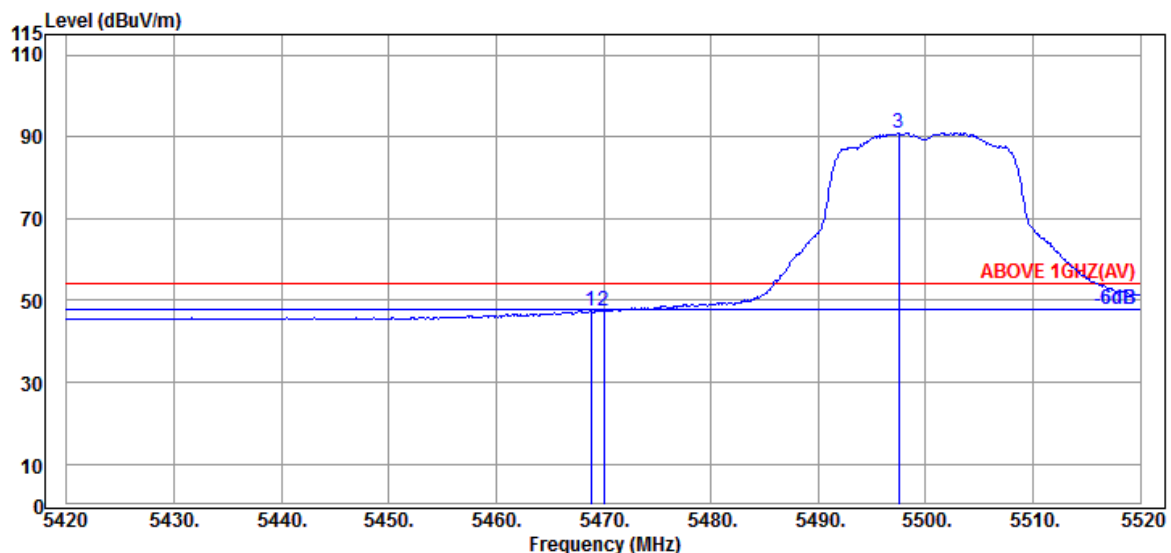

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.47	10.91	34.24	36.31	47.45	54.00	6.55	Average
5470.000	34.47	10.91	34.24	36.21	47.35	54.00	6.65	Average
@ 5497.500	34.40	10.93	34.23	79.74	90.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

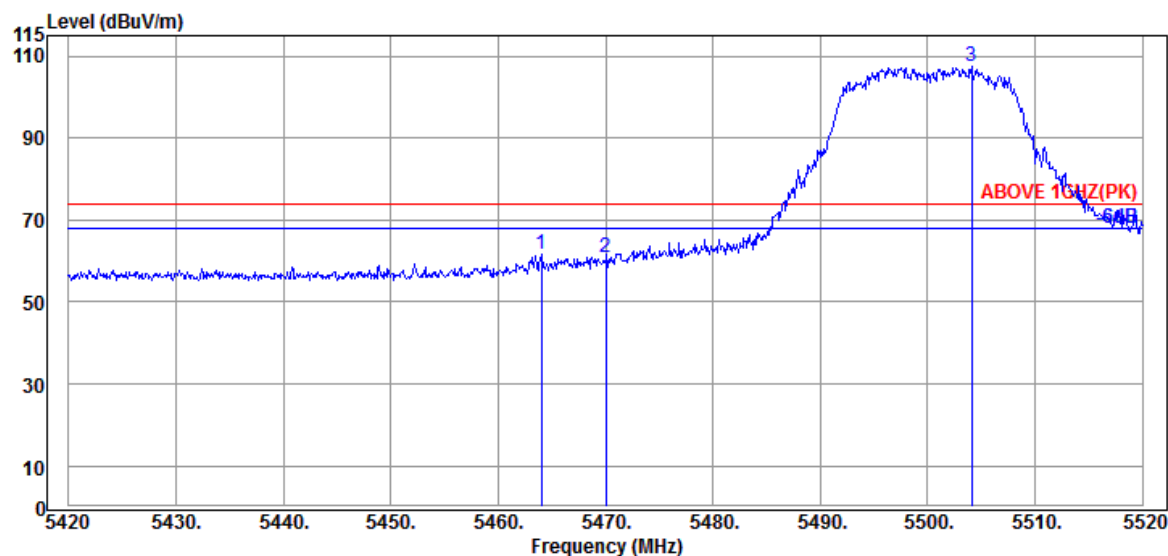

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5464.000	34.47	10.91	34.24	50.32	61.46	74.00	12.54	Peak
5470.000	34.47	10.91	34.24	49.88	61.02	74.00	12.98	Peak
@ 5504.100	34.40	10.93	34.24	96.42	107.51	---	---	Peak

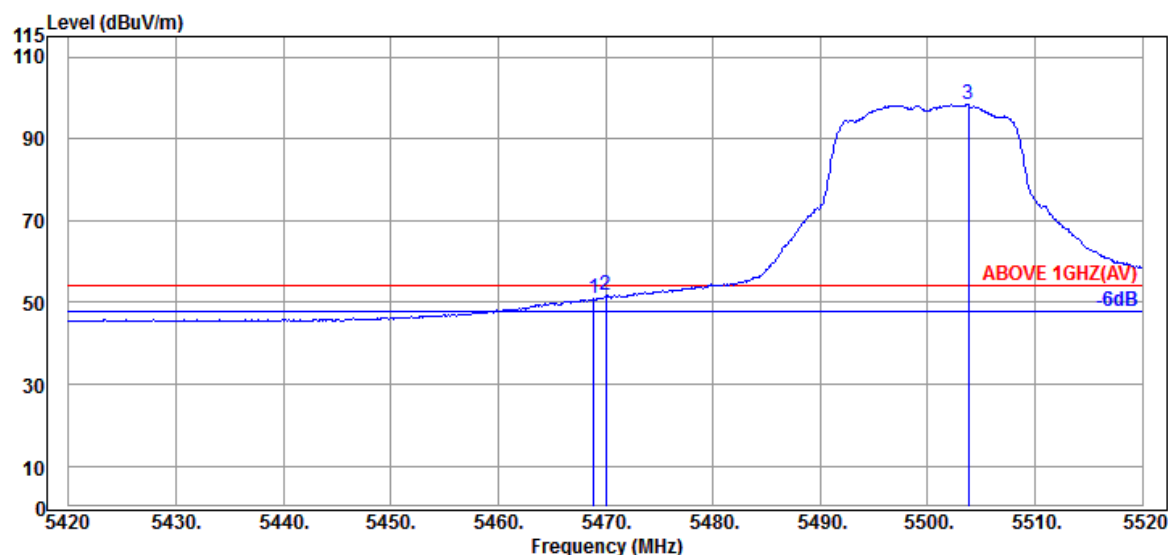

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	39.67	50.81	54.00	3.19	Average
5470.000	34.47	10.91	34.24	40.47	51.61	54.00	2.39	Average
@ 5503.800	34.40	10.93	34.24	87.14	98.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

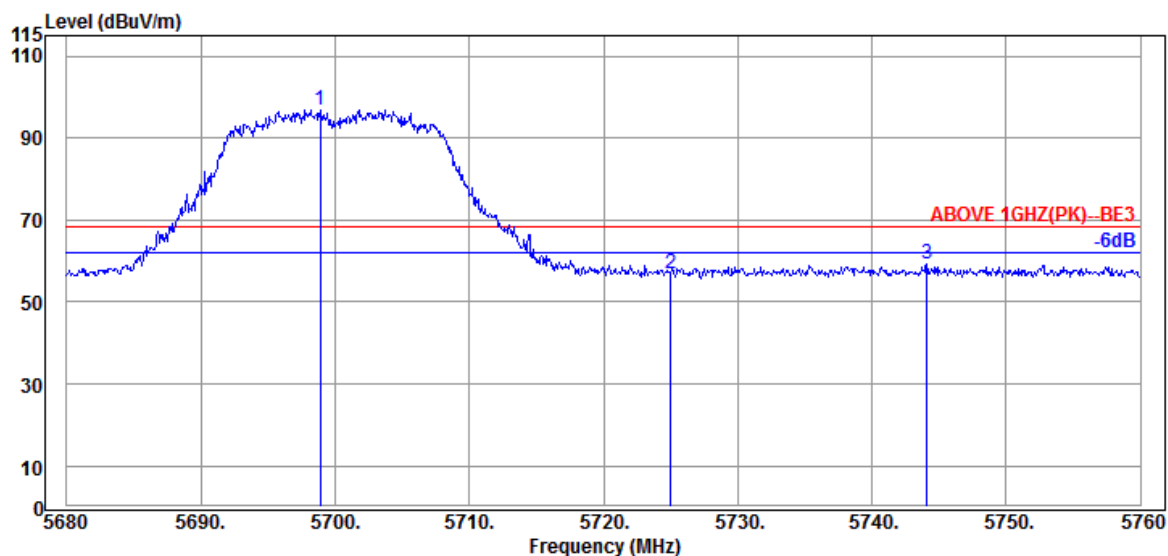

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.880	34.40	11.03	34.31	85.72	96.84	---	---	Peak
	5725.040	34.67	11.05	34.32	45.37	56.77	68.20	11.43	Peak
	5744.080	34.80	11.05	34.33	47.77	59.29	68.20	8.91	Peak

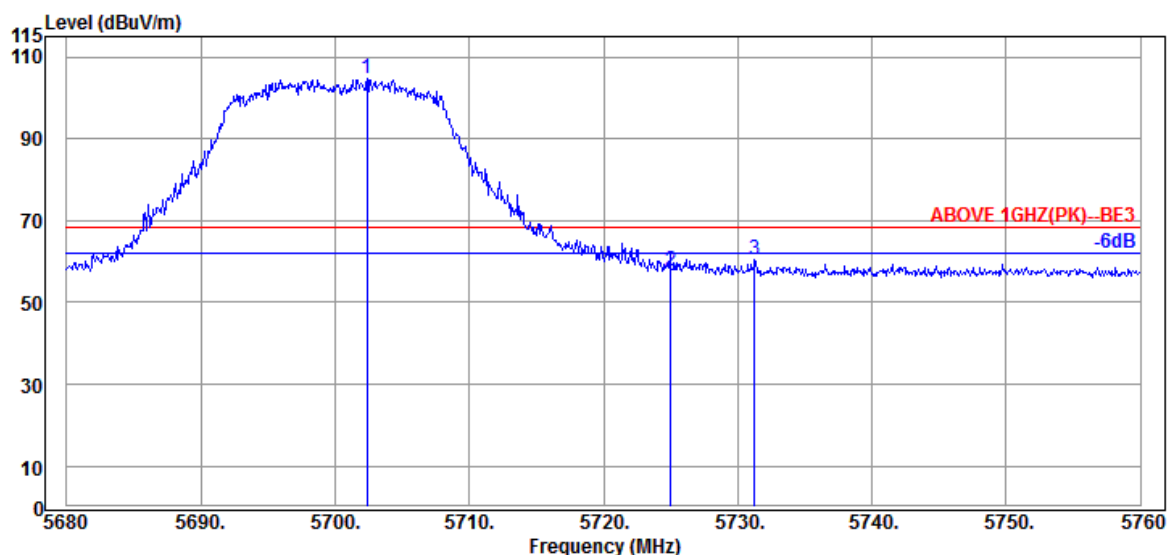

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.400	34.40	11.03	34.31	93.74	104.86	---	---	Peak
	5725.040	34.67	11.05	34.32	46.30	57.70	68.20	10.50	Peak
	5731.280	34.67	11.05	34.33	48.98	60.37	68.20	7.83	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

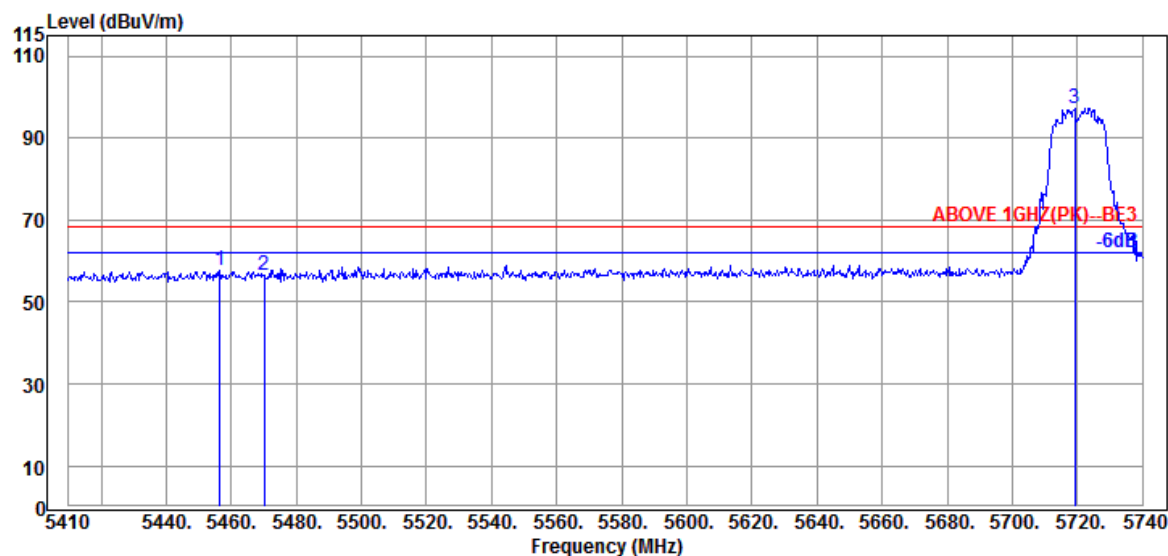

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.530	34.50	10.89	34.24	46.57	57.72	68.20	10.48	Peak
5470.060	34.47	10.91	34.24	45.52	56.66	68.20	11.54	Peak
@ 5719.210	34.53	11.05	34.32	86.07	97.33	---	---	Peak

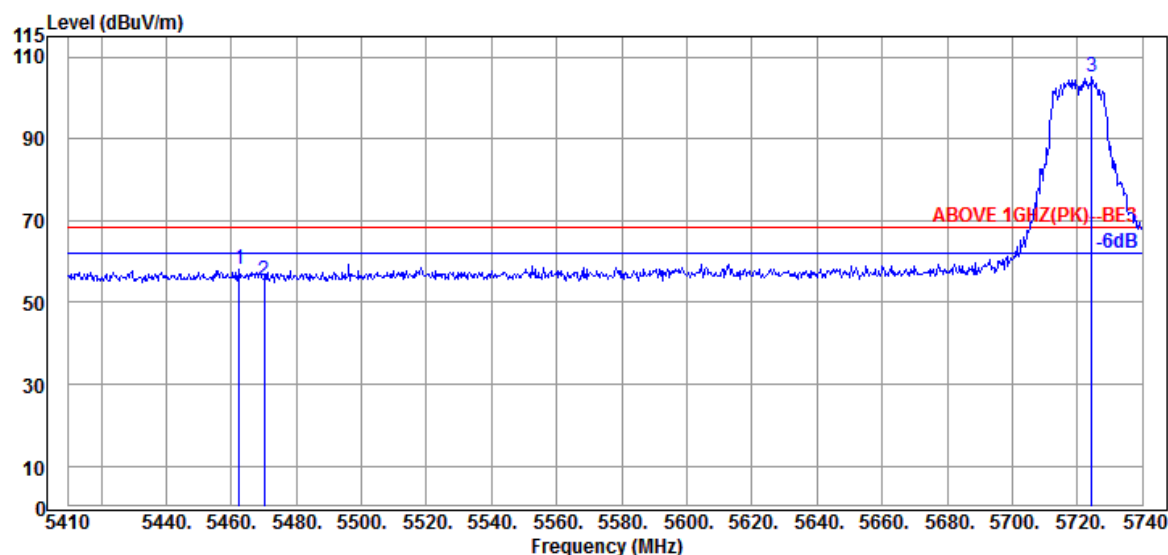

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.470	34.50	10.91	34.24	46.83	58.00	68.20	10.20	Peak
5470.060	34.47	10.91	34.24	44.02	55.16	68.20	13.04	Peak
@ 5724.490	34.67	11.05	34.32	93.54	104.94	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

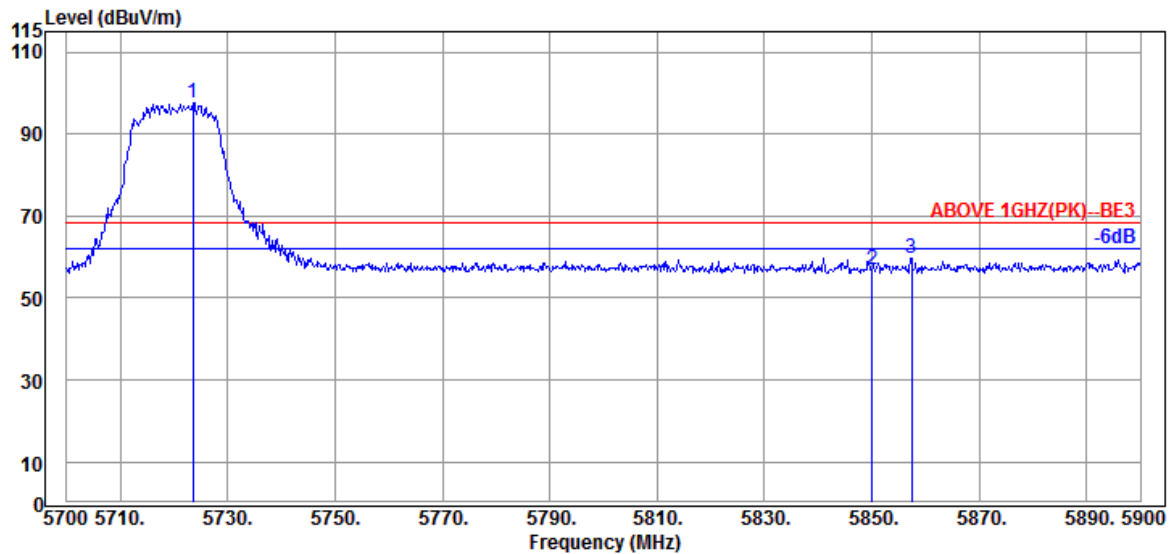

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5723.600	34.67	11.05	34.32	86.18	97.58	---	---	Peak
	5850.000	35.10	11.10	34.38	45.18	57.00	68.20	11.20	Peak
	5857.400	35.20	11.10	34.38	47.75	59.67	68.20	8.53	Peak

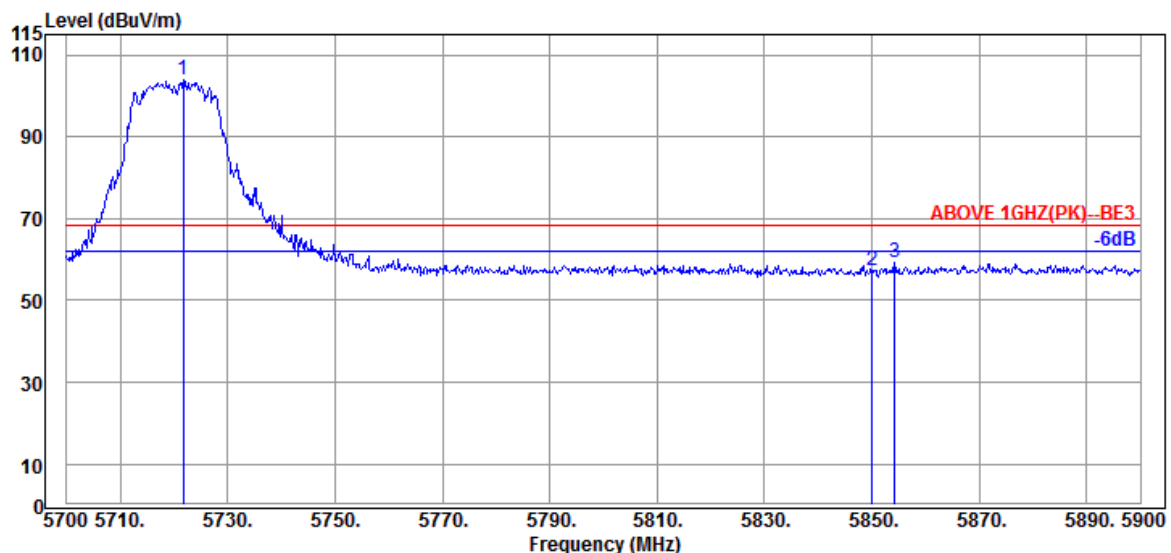

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5721.800	34.53	11.05	34.32	92.87	104.13	---	---	Peak
	5850.000	35.10	11.10	34.38	45.44	57.26	68.20	10.94	Peak
	5854.200	35.10	11.10	34.38	47.37	59.19	68.20	9.01	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

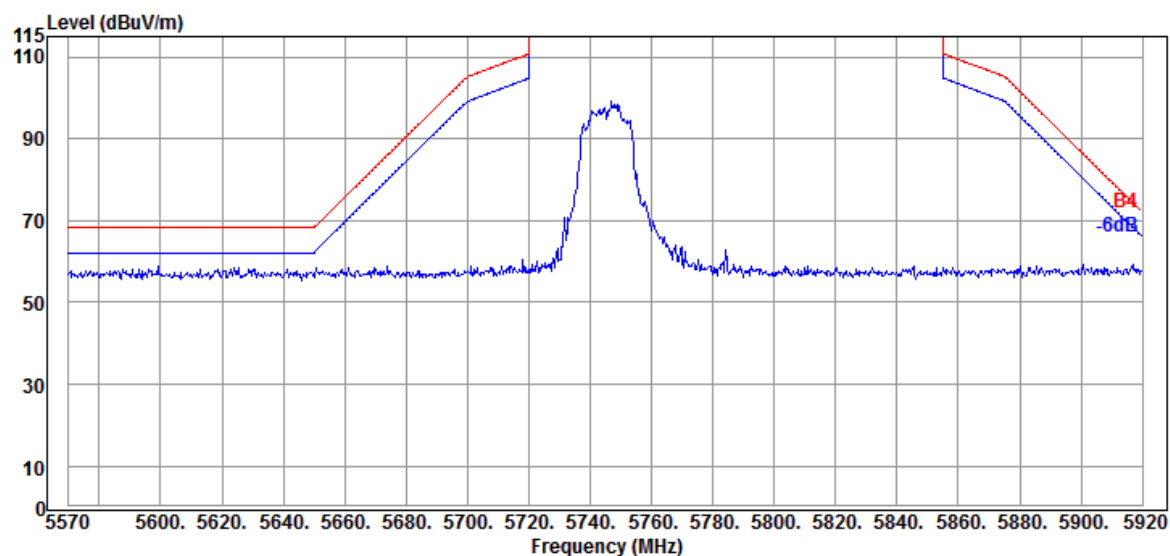

Antenna at Vertical Polarization

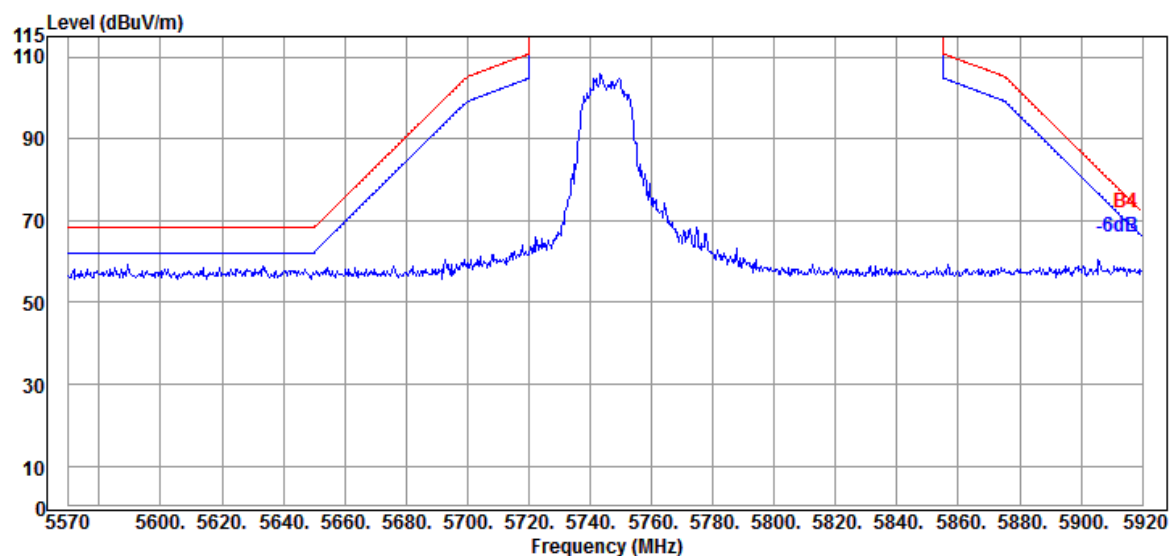

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11a	U-NII Band	III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

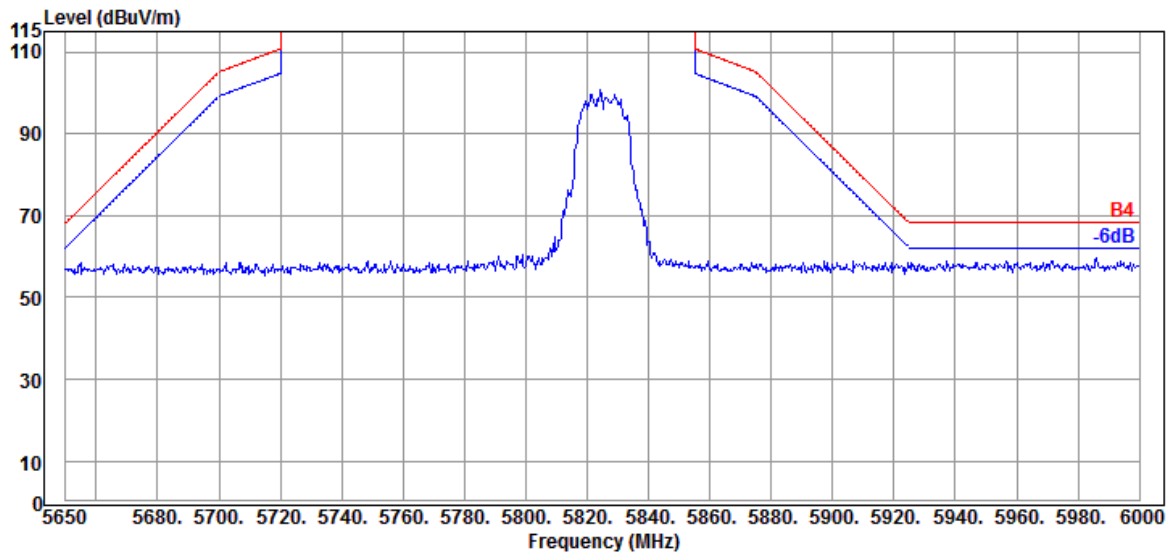

Antenna at Vertical Polarization

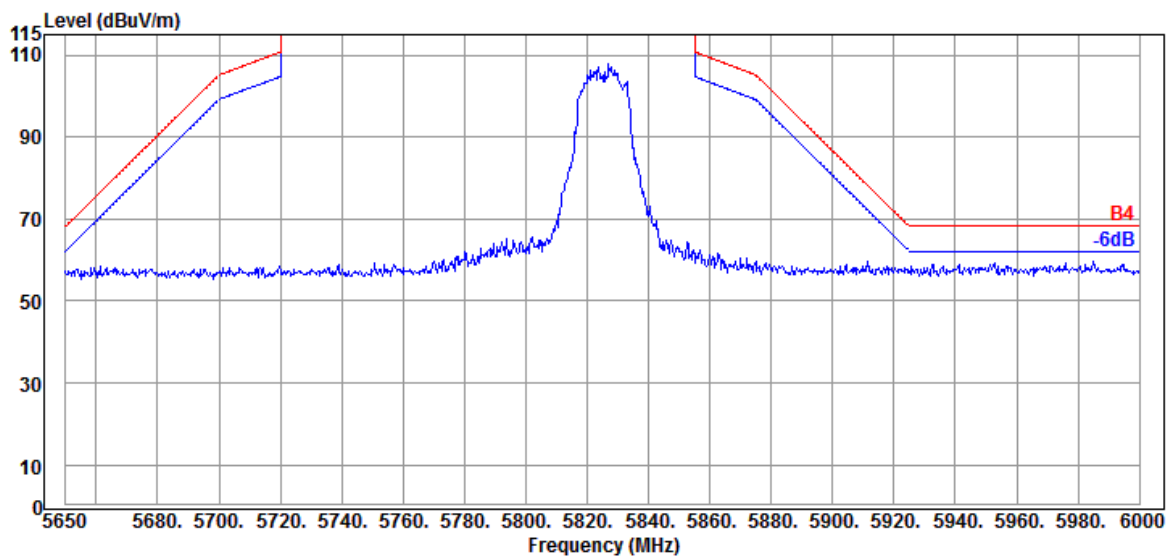

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

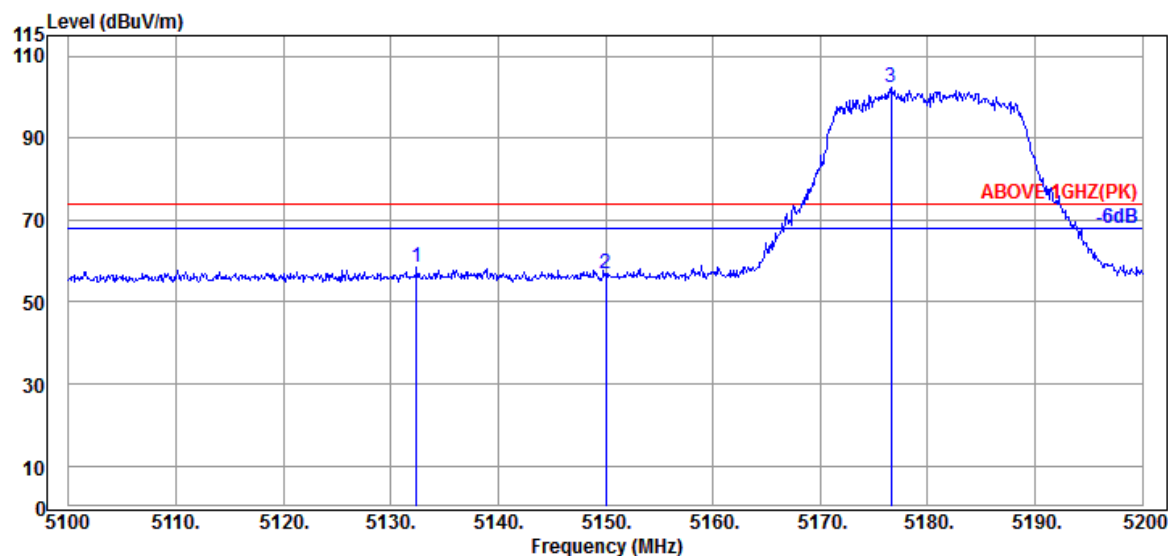

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5132.400	34.17	10.70	34.36	47.90	58.41	74.00	15.59	Peak
5150.000	34.20	10.70	34.35	46.38	56.93	74.00	17.07	Peak
@ 5176.600	34.20	10.72	34.34	91.65	102.23	---	---	Peak

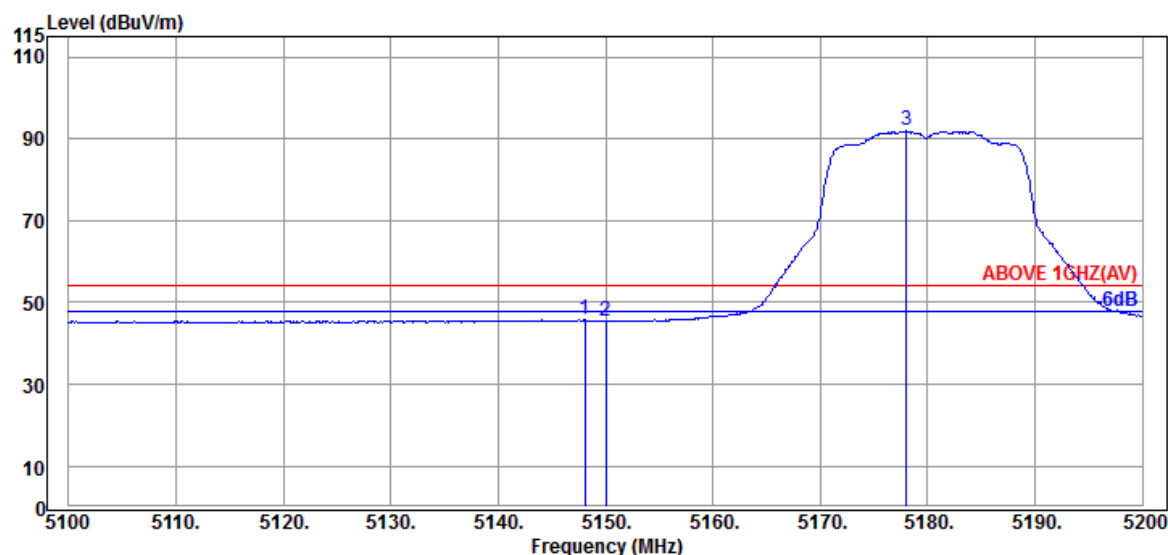

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.100	34.20	10.70	34.35	35.14	45.69	54.00	8.31	Average
5150.000	34.20	10.70	34.35	34.98	45.53	54.00	8.47	Average
@ 5178.000	34.20	10.72	34.34	81.31	91.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

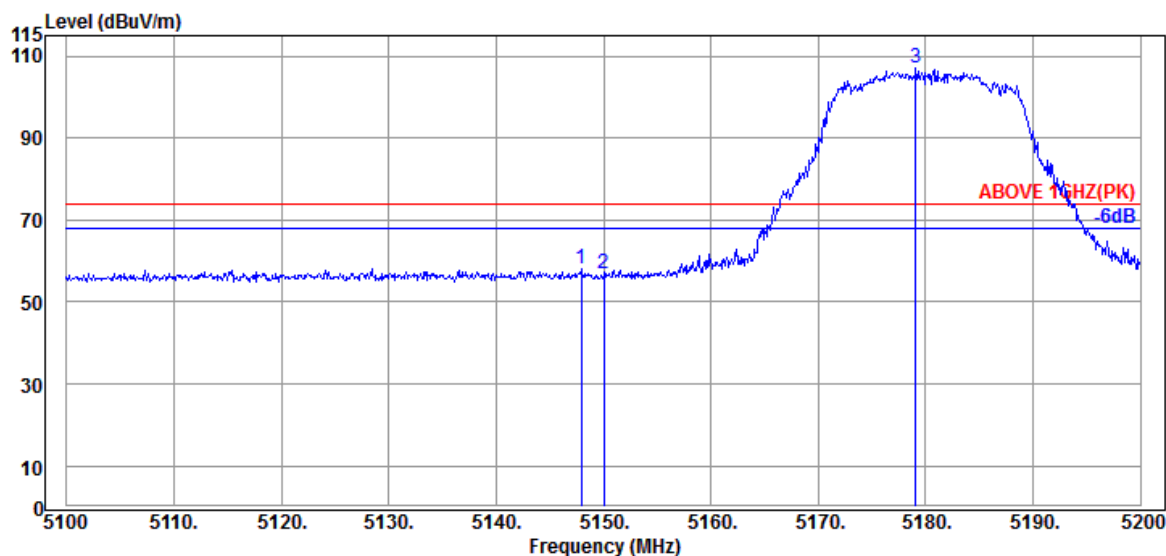

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	34.20	10.70	34.35	47.71	58.26	74.00	15.74	Peak
5150.000	34.20	10.70	34.35	46.36	56.91	74.00	17.09	Peak
@ 5179.100	34.20	10.72	34.34	96.50	107.08	---	---	Peak

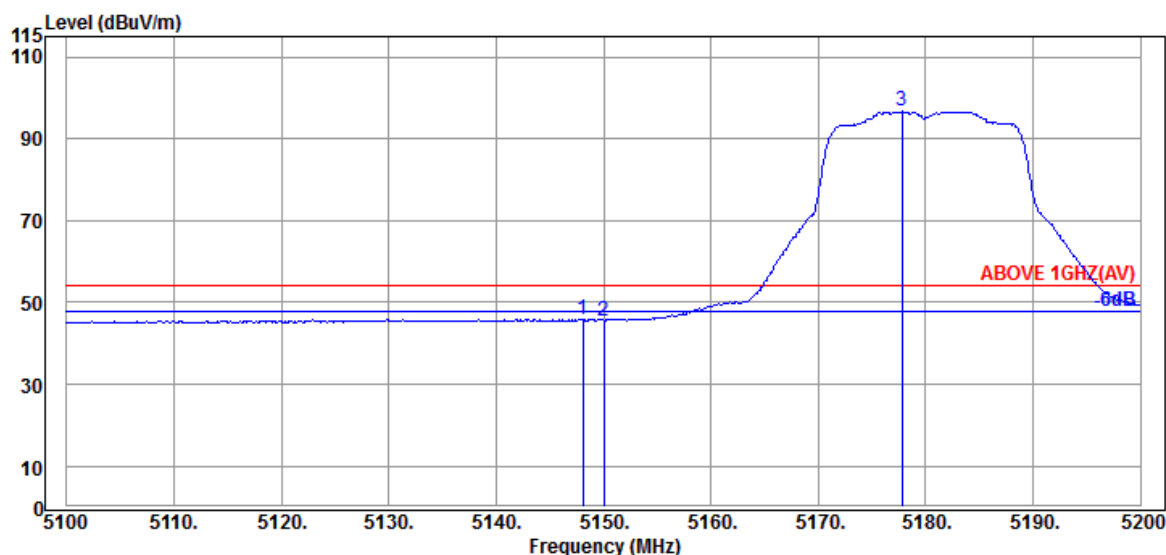

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.20	10.70	34.35	35.36	45.91	54.00	8.09	Average
5150.000	34.20	10.70	34.35	35.02	45.57	54.00	8.43	Average
@ 5177.800	34.20	10.72	34.34	86.10	96.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

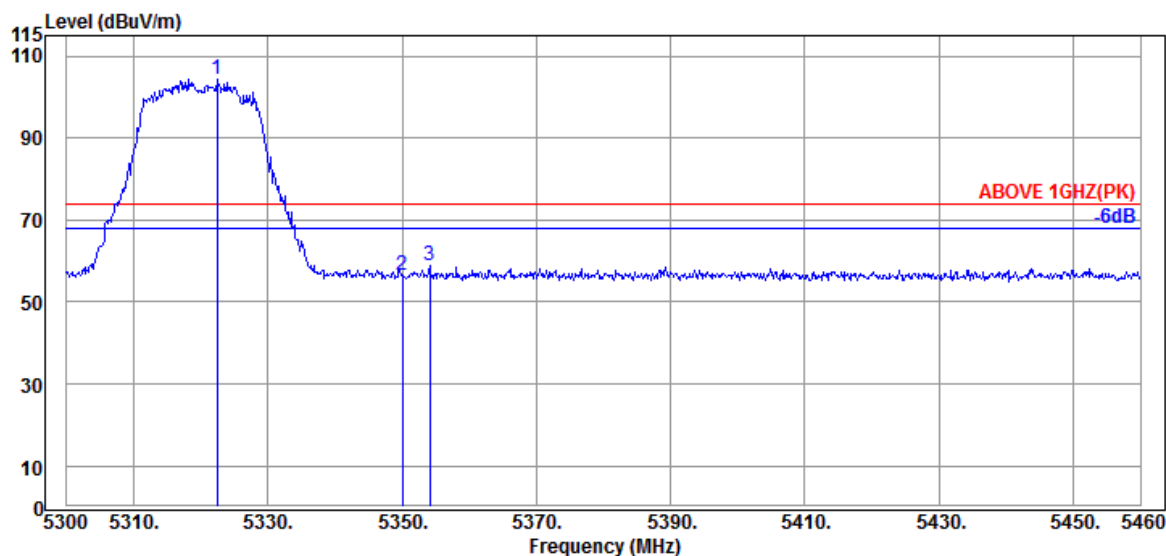

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	34.53	10.83	34.28	93.12	104.20	---	---	Peak
5350.080	34.60	10.83	34.27	45.21	56.37	74.00	17.63	Peak
5354.080	34.60	10.83	34.27	47.53	58.69	74.00	15.31	Peak

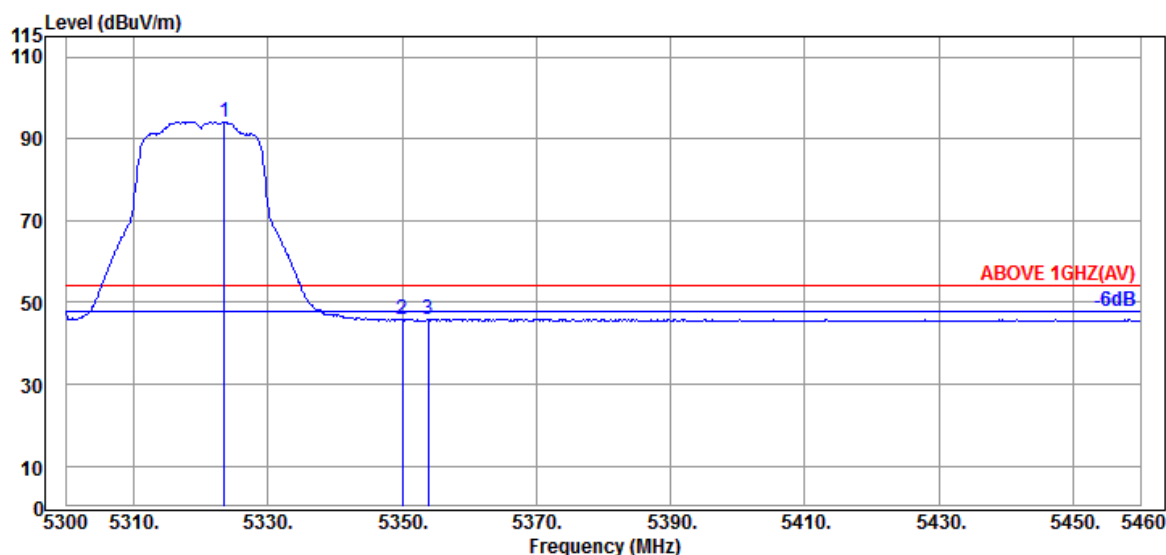

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.520	34.57	10.83	34.28	83.13	94.25	---	---	Average
5350.080	34.60	10.83	34.27	34.51	45.67	54.00	8.33	Average
5353.920	34.60	10.83	34.27	34.80	45.96	54.00	8.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

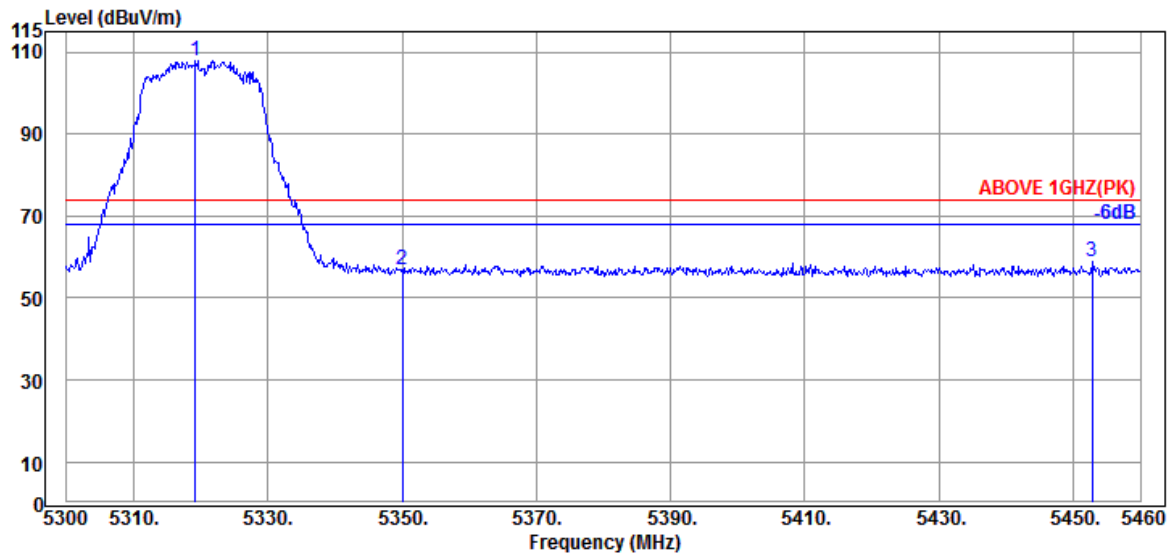

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.200	34.53	10.81	34.29	96.75	107.80	---	---	Peak
5350.080	34.60	10.83	34.27	45.68	56.84	74.00	17.16	Peak
5452.800	34.50	10.89	34.24	47.78	58.93	74.00	15.07	Peak

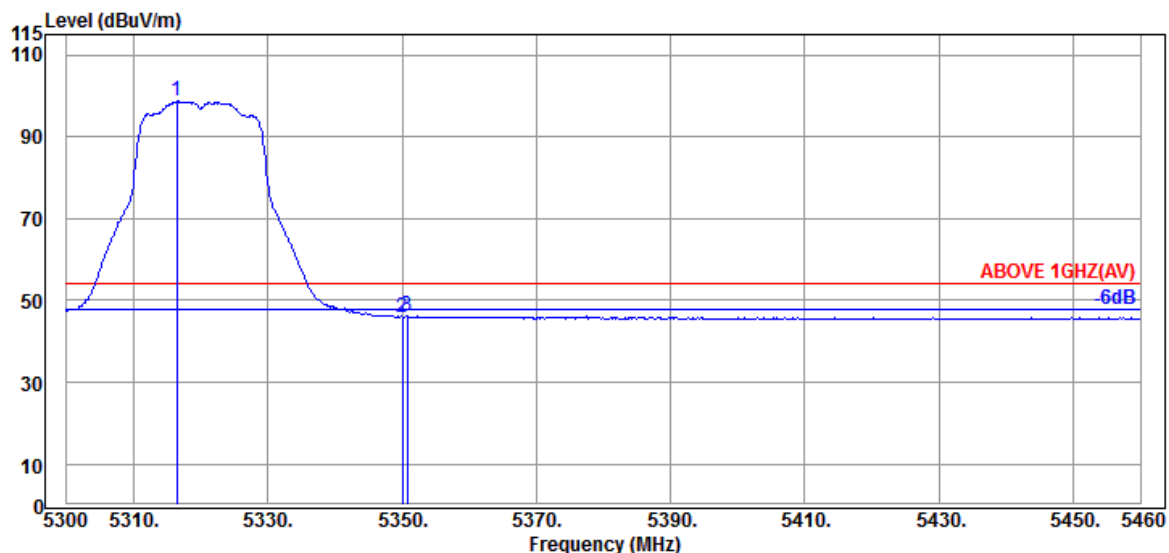

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.53	10.81	34.29	87.62	98.67	---	---	Average
5350.080	34.60	10.83	34.27	34.74	45.90	54.00	8.10	Average
5350.720	34.60	10.83	34.27	34.99	46.15	54.00	7.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

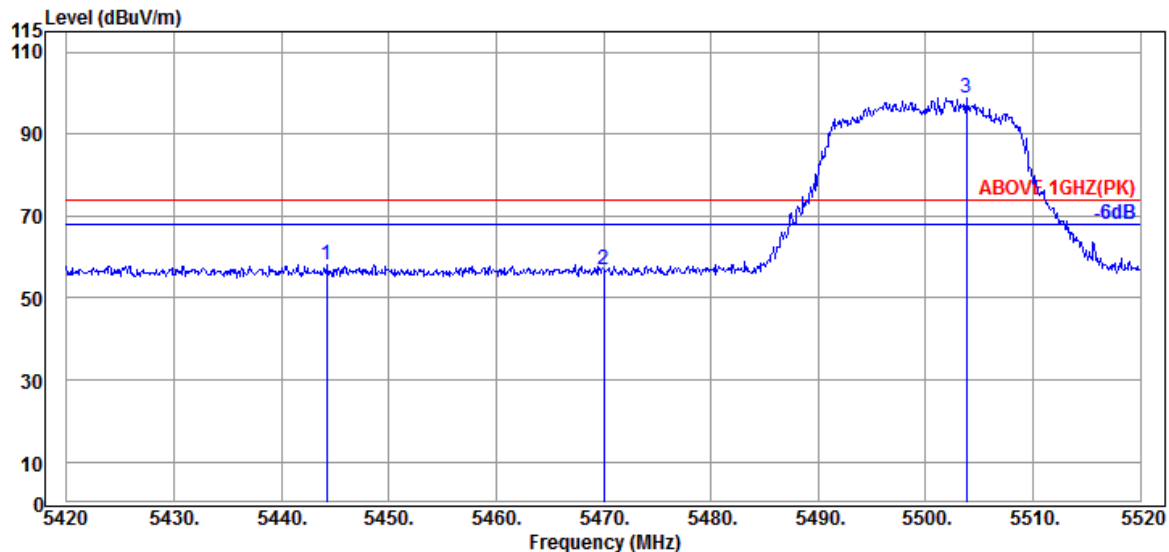

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.200	34.55	10.89	34.25	47.02	58.21	74.00	15.79	Peak
5470.000	34.47	10.91	34.24	45.67	56.81	74.00	17.19	Peak
@ 5503.800	34.40	10.93	34.24	87.87	98.96	---	---	Peak

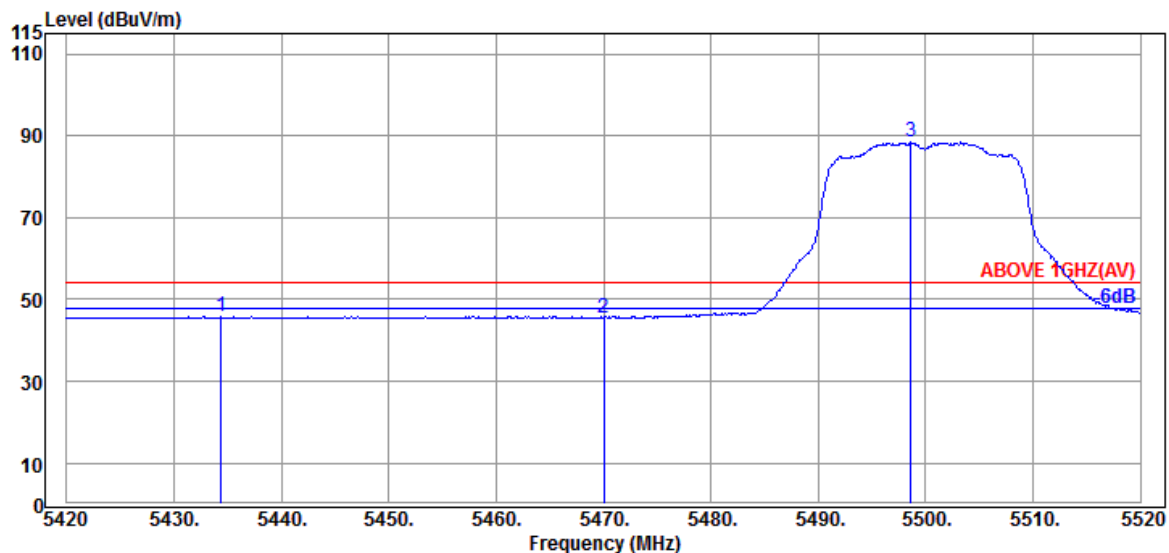

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.400	34.55	10.89	34.25	34.72	45.91	54.00	8.09	Average
5470.000	34.47	10.91	34.24	34.40	45.54	54.00	8.46	Average
@ 5498.600	34.40	10.93	34.23	77.37	88.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

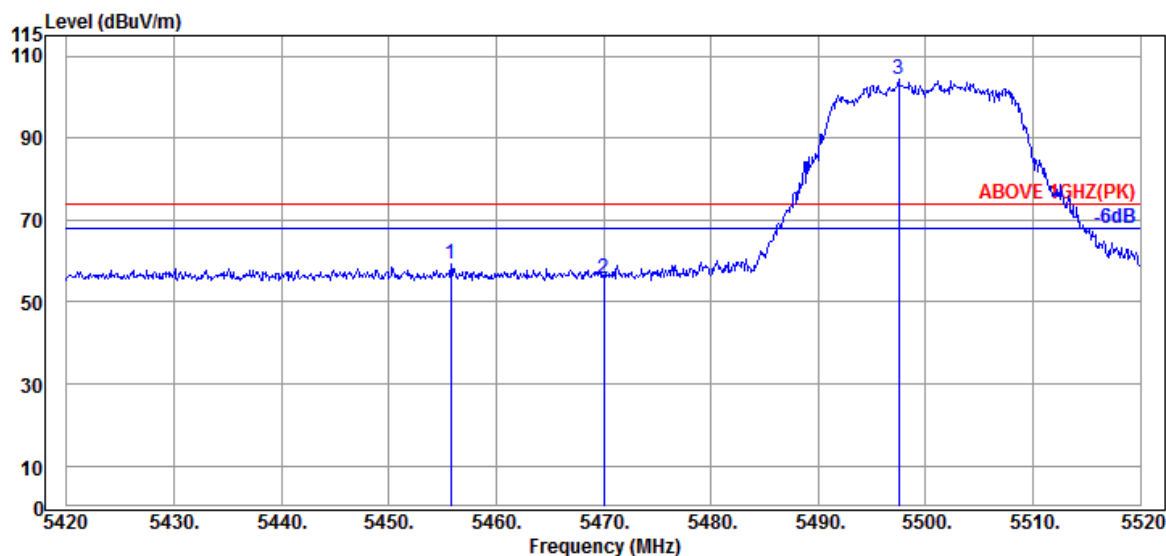

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.800	34.50	10.89	34.24	48.18	59.33	74.00	14.67	Peak
5470.000	34.47	10.91	34.24	44.68	55.82	74.00	18.18	Peak
@ 5497.500	34.40	10.93	34.23	93.18	104.28	---	---	Peak

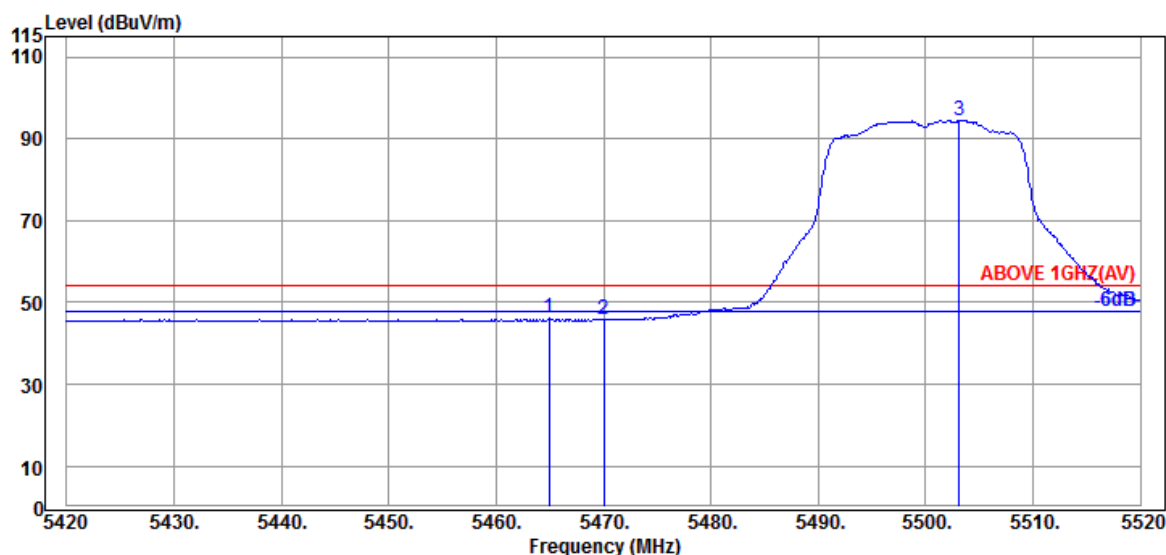

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.47	10.91	34.24	34.98	46.12	54.00	7.88	Average
5470.000	34.47	10.91	34.24	34.81	45.95	54.00	8.05	Average
@ 5503.100	34.40	10.93	34.24	83.41	94.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

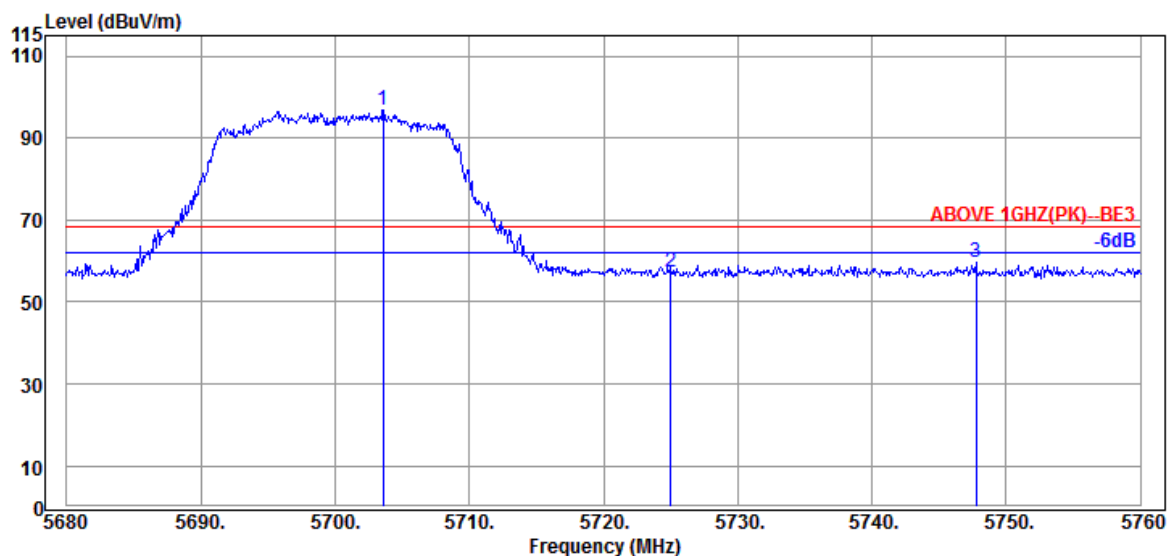

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5703.600	34.40	11.03	34.31	85.74	96.86	---	---	Peak
	5725.040	34.67	11.05	34.32	46.04	57.44	68.20	10.76	Peak
	5747.760	34.80	11.06	34.33	48.15	59.68	68.20	8.52	Peak

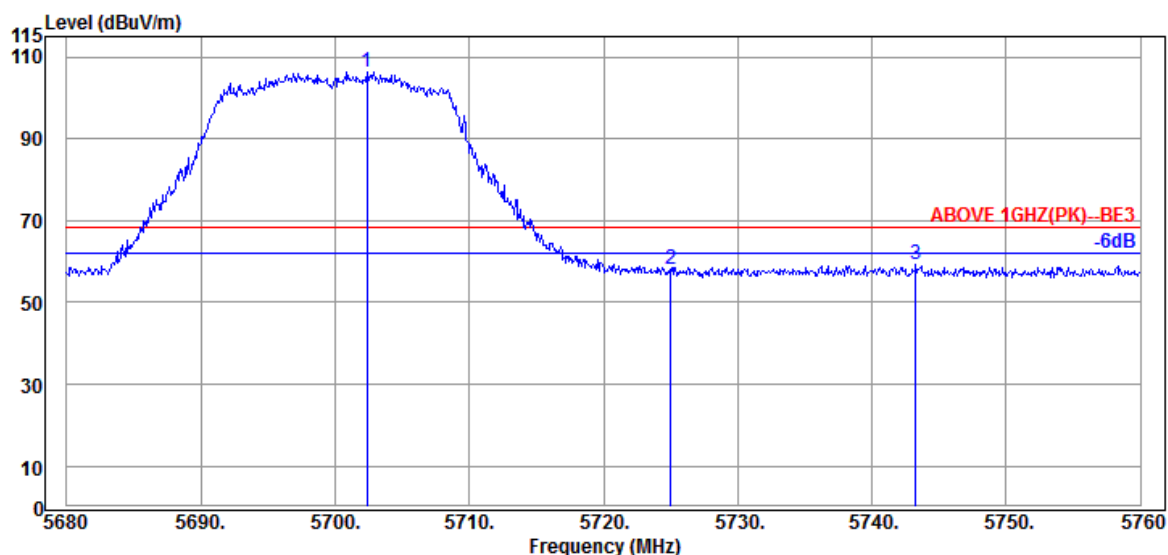

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.400	34.40	11.03	34.31	95.14	106.26	---	---	Peak
	5725.040	34.67	11.05	34.32	46.75	58.15	68.20	10.05	Peak
	5743.280	34.80	11.05	34.33	47.56	59.08	68.20	9.12	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

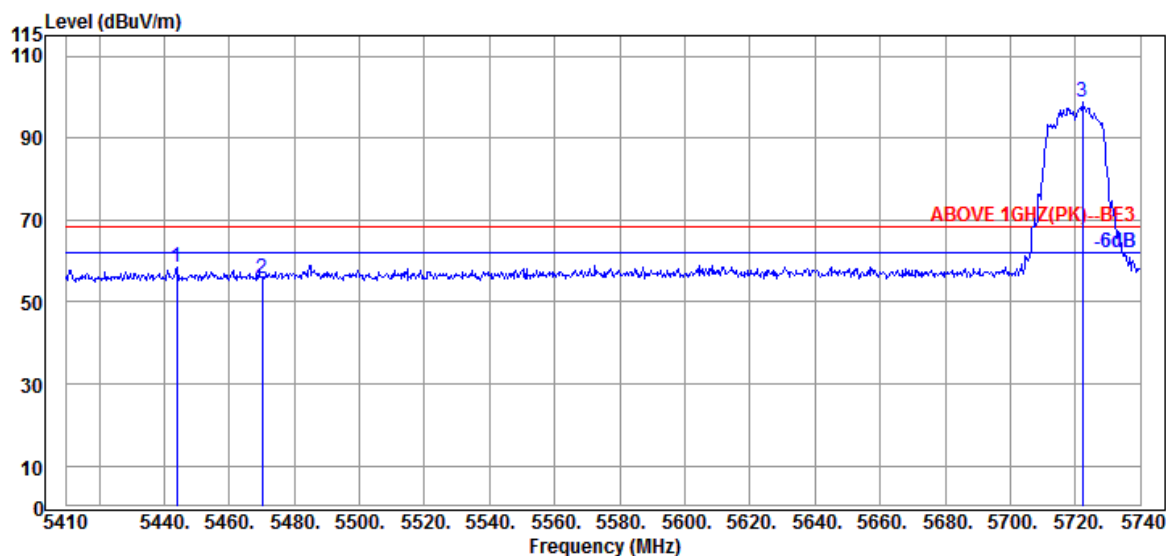

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.990	34.55	10.89	34.25	47.11	58.30	68.20	9.90	Peak
5470.060	34.47	10.91	34.24	44.74	55.88	68.20	12.32	Peak
@ 5722.180	34.67	11.05	34.32	87.54	98.94	---	---	Peak

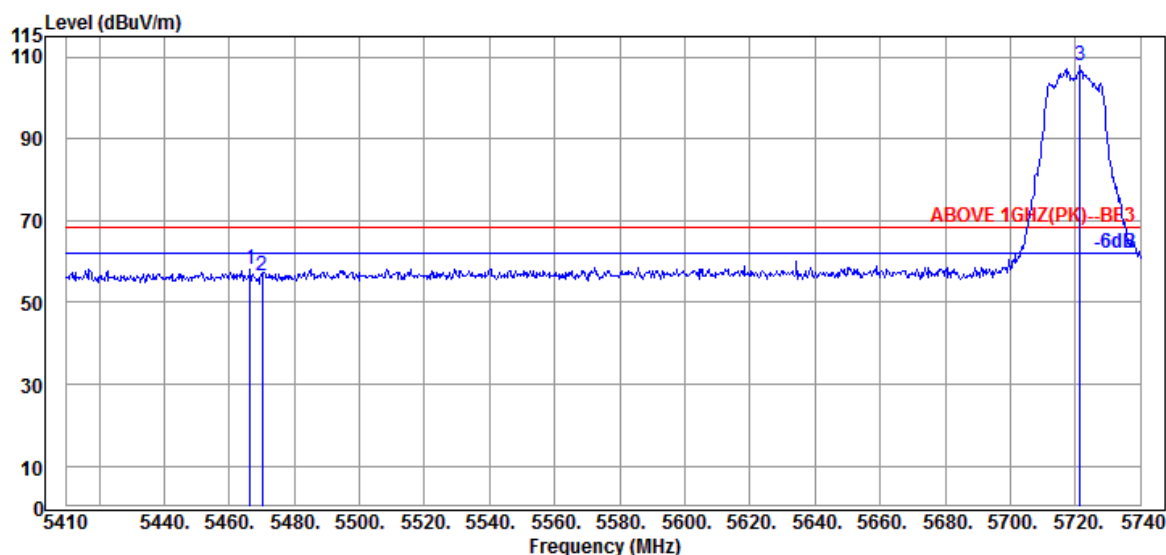

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.47	10.91	34.24	47.01	58.15	68.20	10.05	Peak
5470.060	34.47	10.91	34.24	45.51	56.65	68.20	11.55	Peak
@ 5721.520	34.53	11.05	34.32	96.62	107.88	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

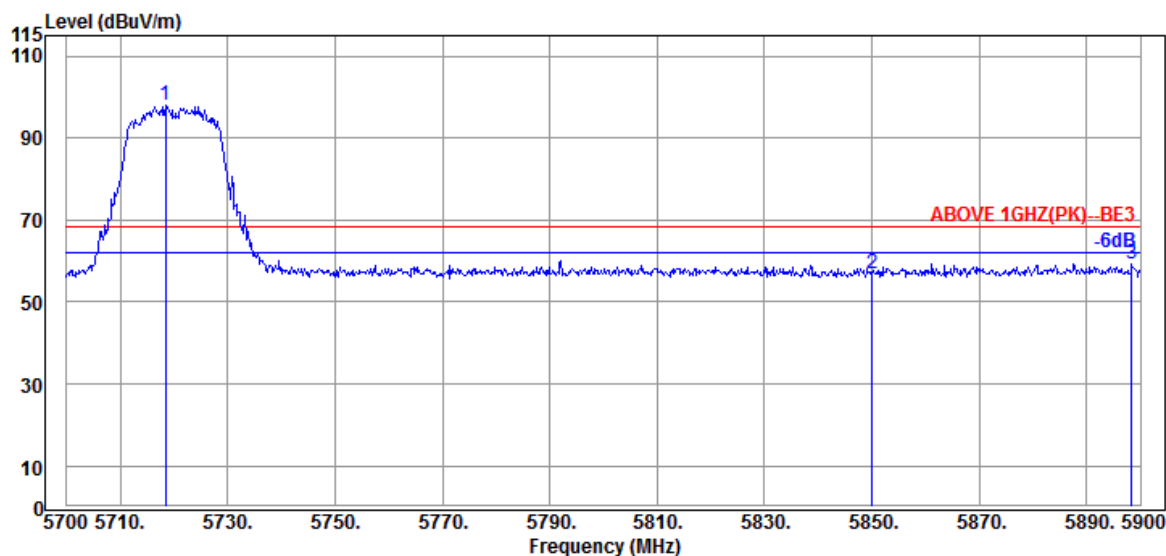

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5718.400	34.53	11.05	34.32	86.77	98.03	---	---	Peak
	5850.000	35.10	11.10	34.38	45.12	56.94	68.20	11.26	Peak
	5898.400	35.40	11.14	34.40	47.26	59.40	68.20	8.80	Peak

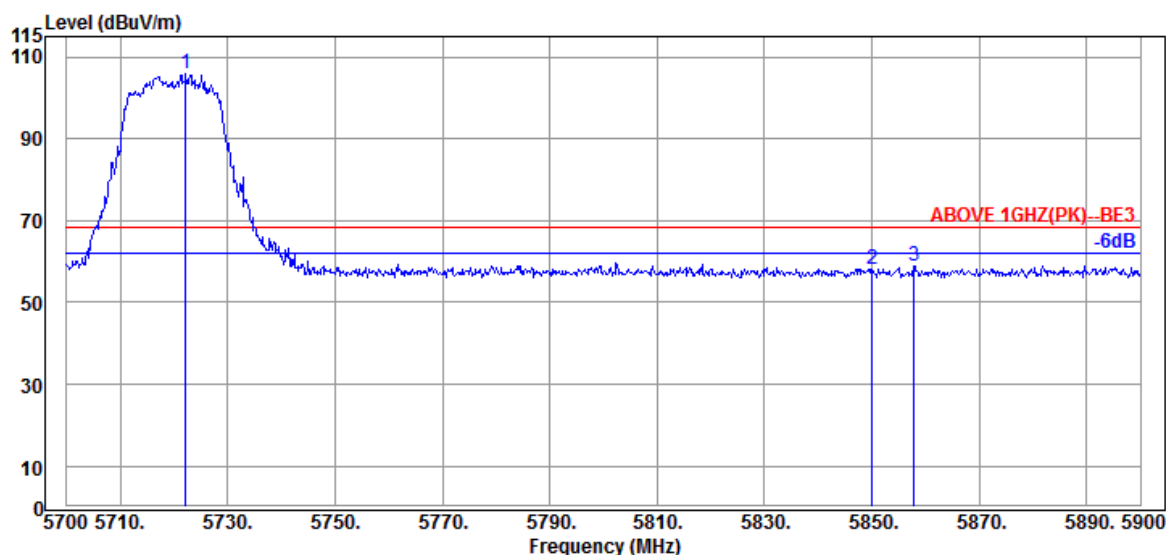

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.200	34.67	11.05	34.32	94.40	105.80	---	---	Peak
	5850.000	35.10	11.10	34.38	46.18	58.00	68.20	10.20	Peak
	5857.800	35.20	11.12	34.39	47.11	59.04	68.20	9.16	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

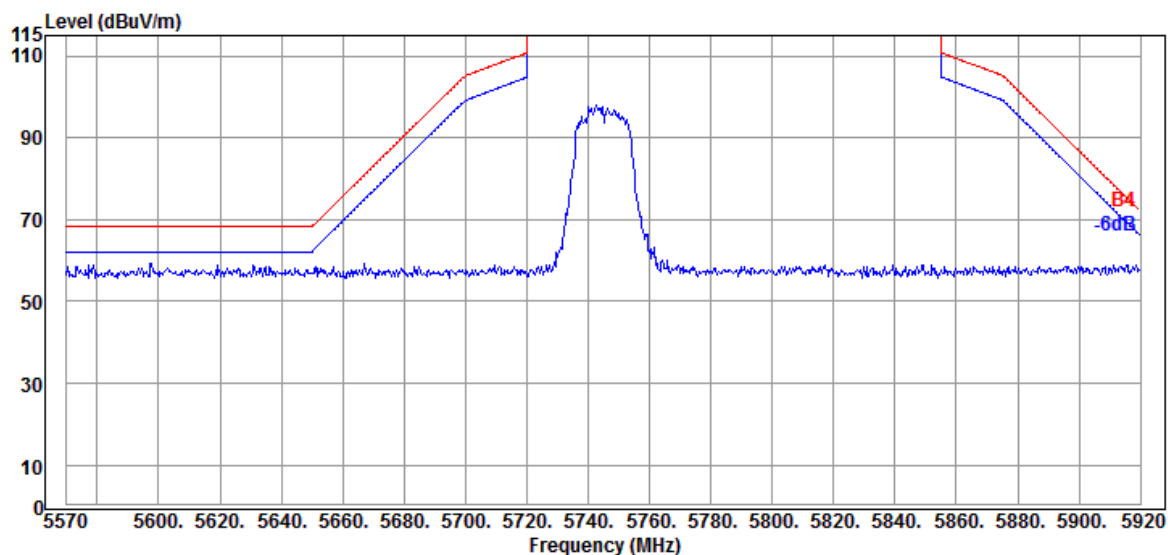

Antenna at Vertical Polarization

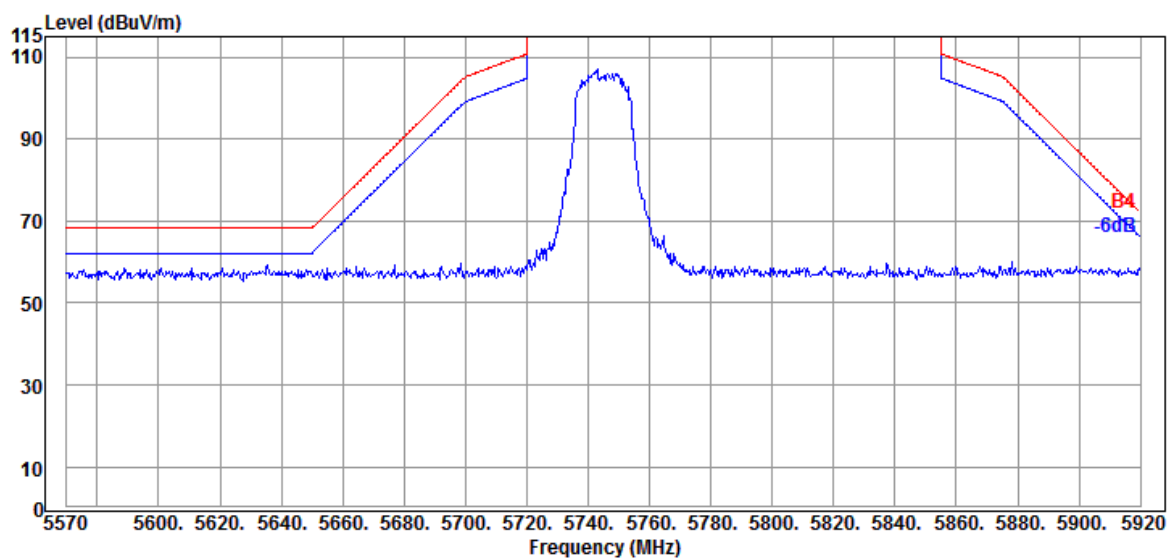


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

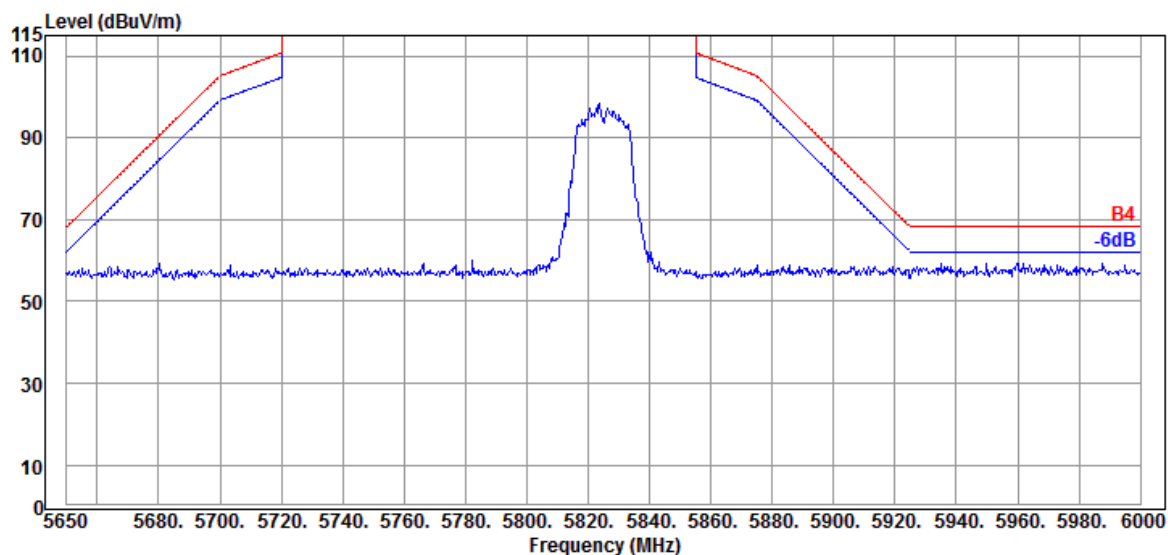

Antenna at Vertical Polarization

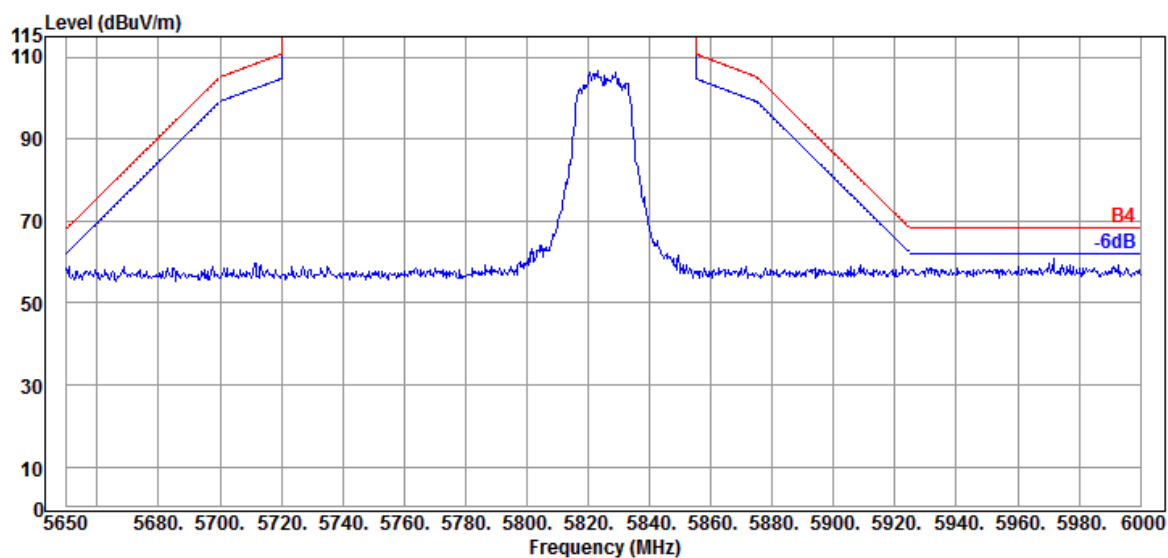


Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

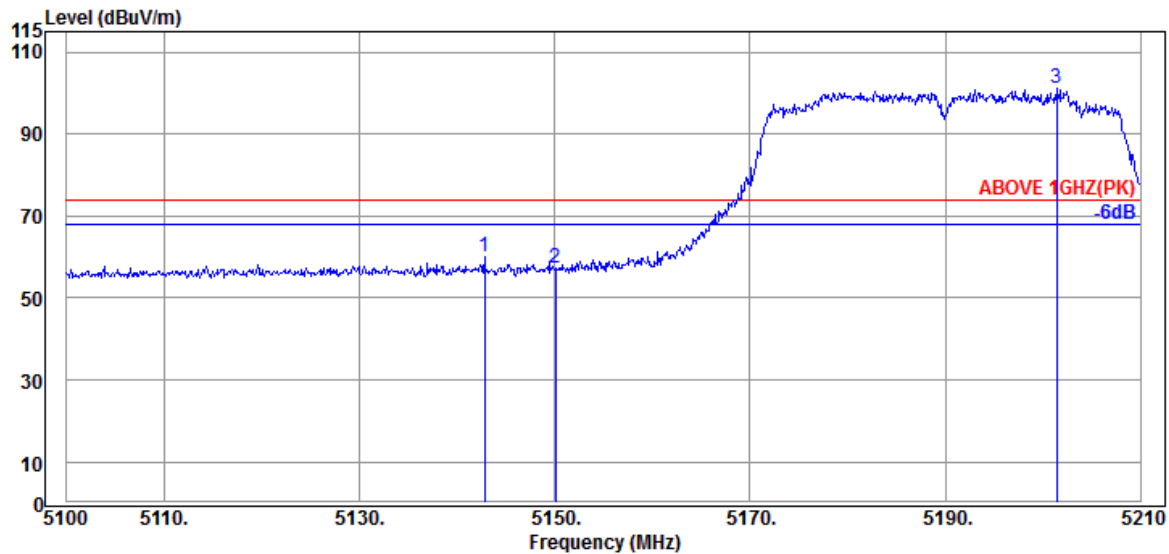

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5142.790	34.20	10.70	34.36	49.38	59.92	74.00	14.08	Peak
5150.050	34.20	10.70	34.35	46.89	57.44	74.00	16.56	Peak
@ 5201.420	34.20	10.74	34.33	90.57	101.18	---	---	Peak

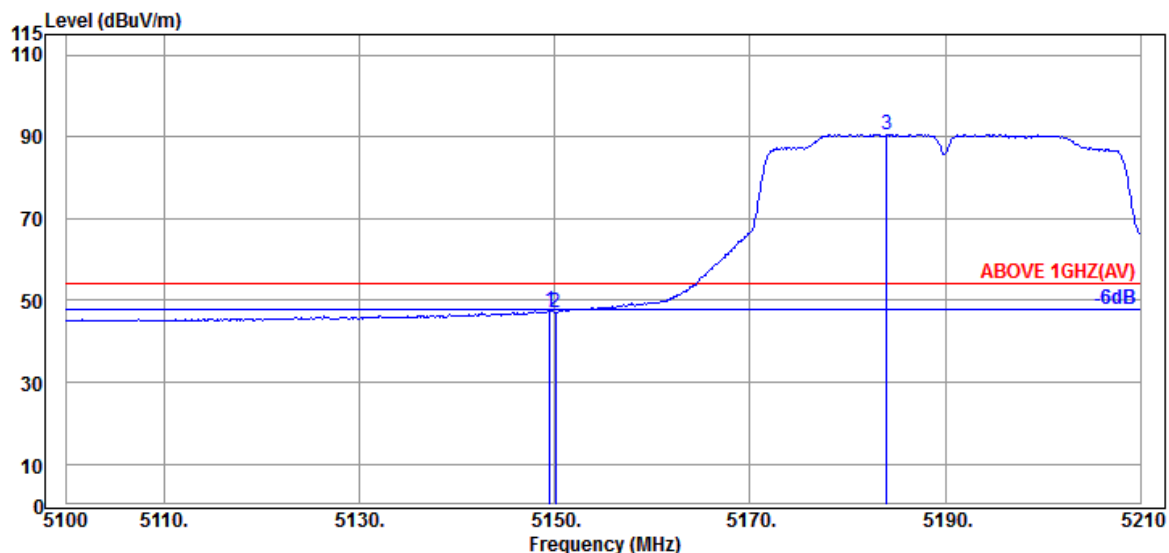

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	36.96	47.51	54.00	6.49	Average
5150.050	34.20	10.70	34.35	36.65	47.20	54.00	6.80	Average
@ 5184.040	34.20	10.72	34.34	80.11	90.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

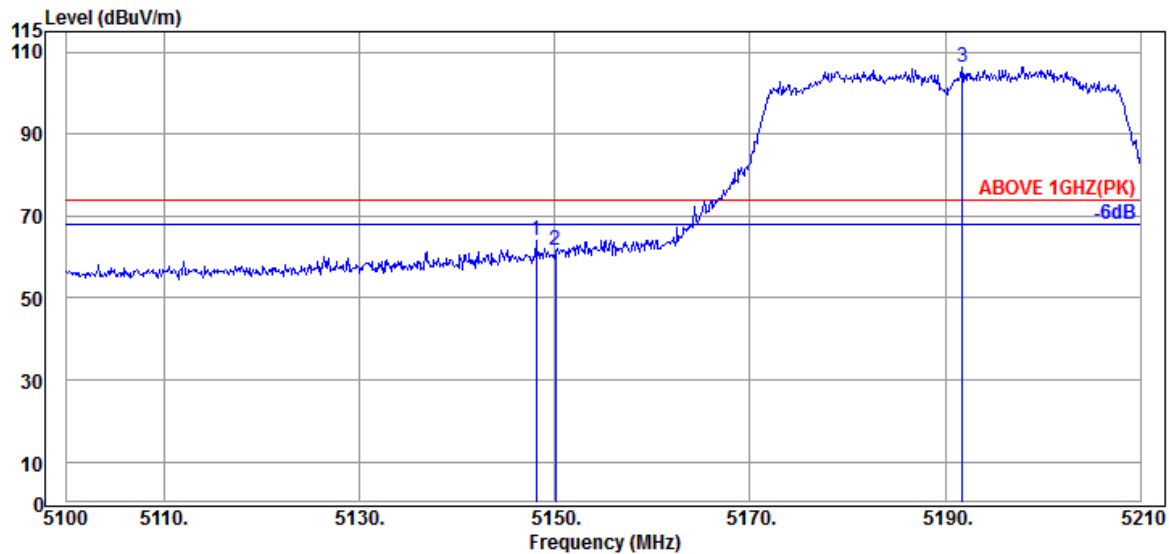

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.070	34.20	10.70	34.35	53.48	64.03	74.00	9.97	Peak
5150.050	34.20	10.70	34.35	50.97	61.52	74.00	12.48	Peak
@ 5191.740	34.20	10.74	34.34	95.68	106.28	---	---	Peak

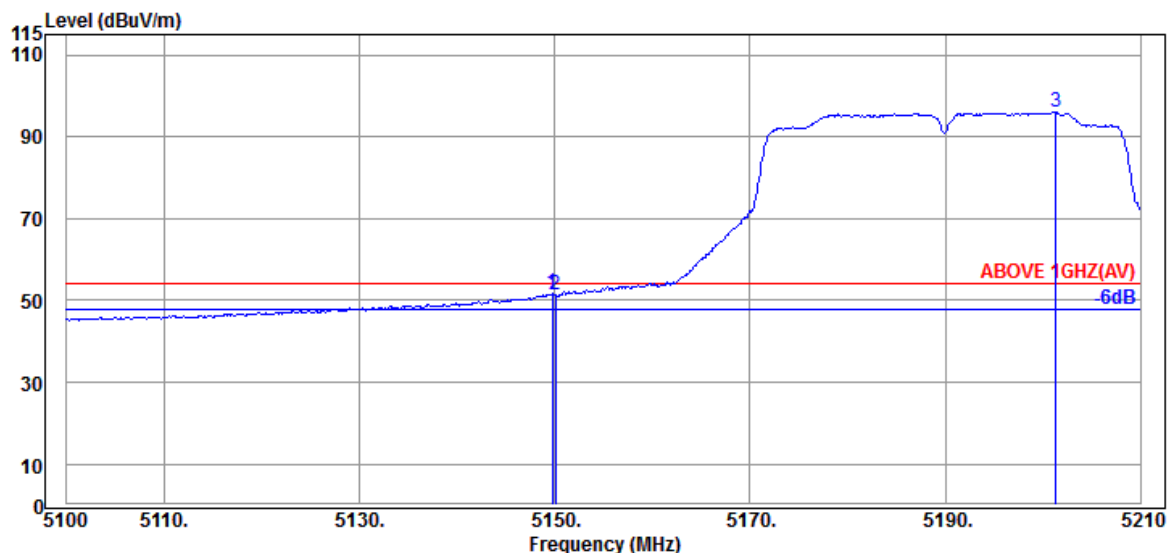

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	41.06	51.61	54.00	2.39	Average
5150.050	34.20	10.70	34.35	40.87	51.42	54.00	2.58	Average
@ 5201.310	34.20	10.74	34.33	85.53	96.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

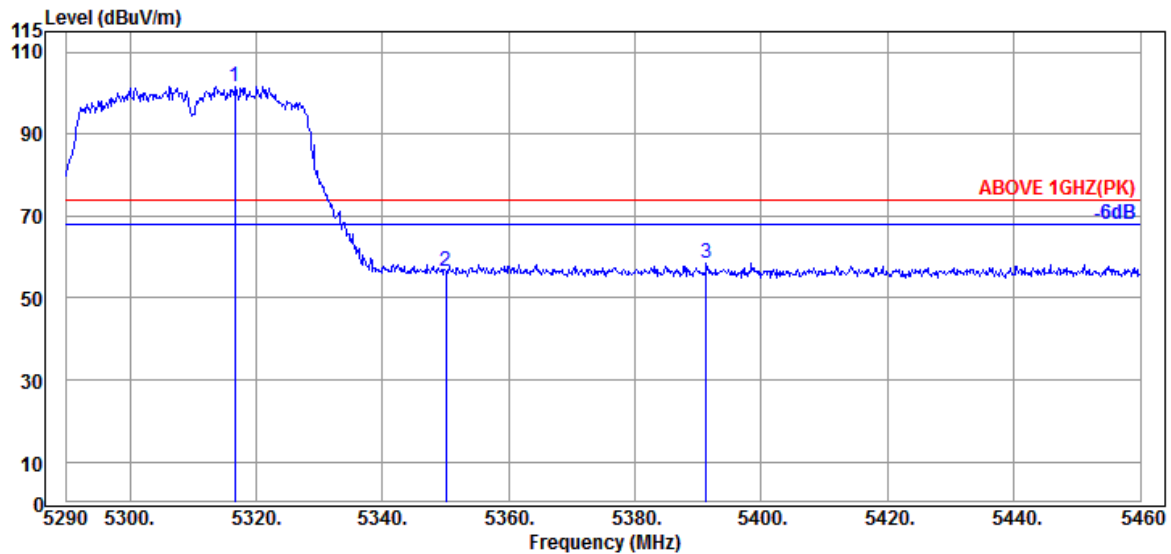

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.690	34.53	10.81	34.29	90.62	101.67	---	---	Peak
5350.010	34.60	10.83	34.27	45.51	56.67	74.00	17.33	Peak
5391.320	34.70	10.87	34.27	47.16	58.46	74.00	15.54	Peak

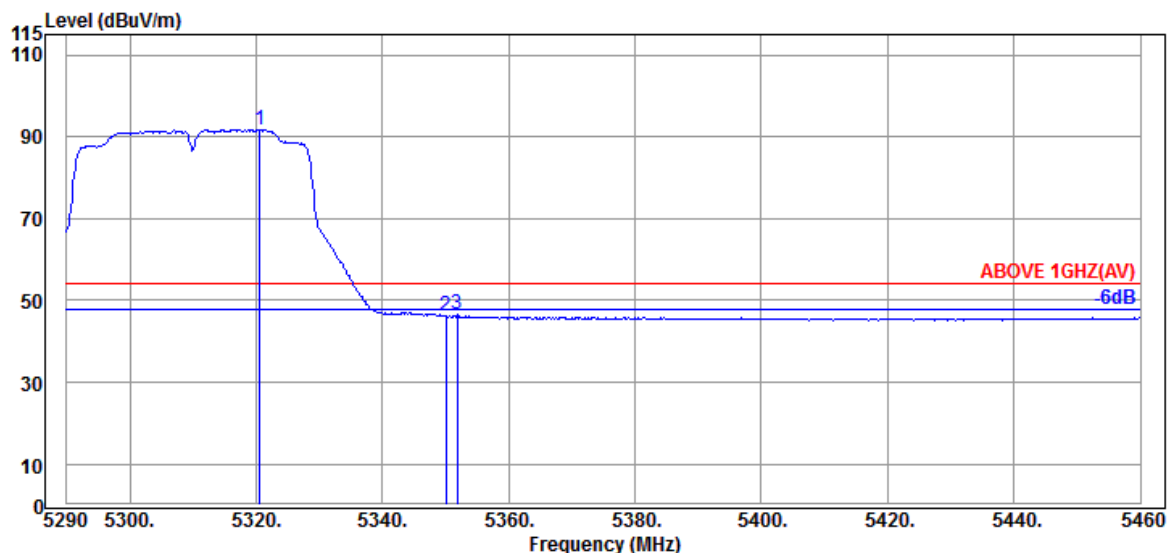

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.600	34.53	10.81	34.29	80.80	91.85	---	---	Average
5350.010	34.60	10.83	34.27	34.89	46.05	54.00	7.95	Average
5351.880	34.60	10.83	34.27	35.40	46.56	54.00	7.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

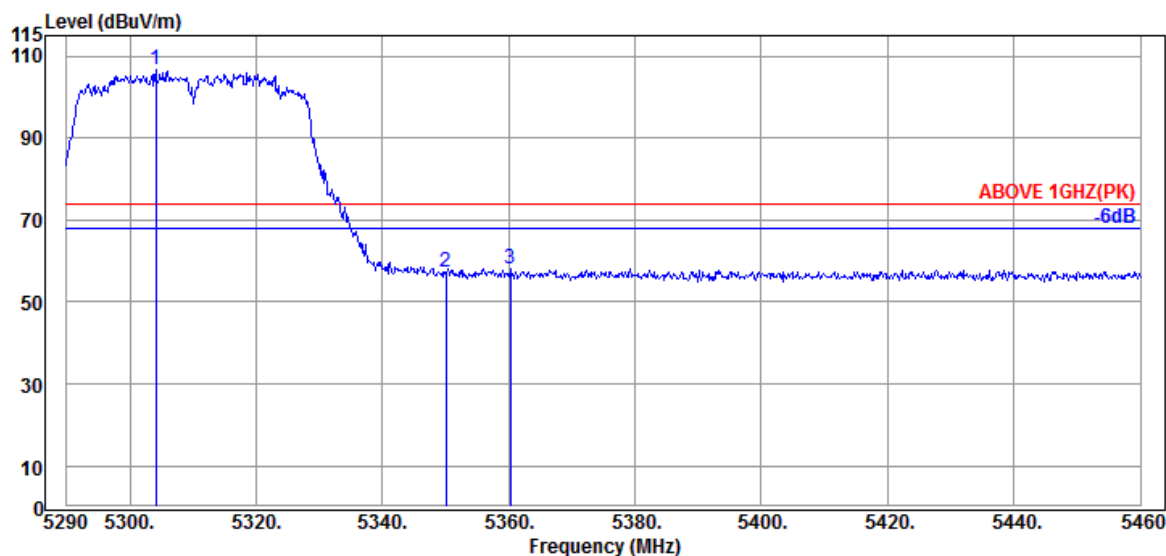

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5304.110	34.50	10.81	34.29	95.54	106.56	---	---	Peak
	5350.010	34.60	10.83	34.27	46.06	57.22	74.00	16.78	Peak
	5360.210	34.63	10.85	34.27	46.82	58.03	74.00	15.97	Peak

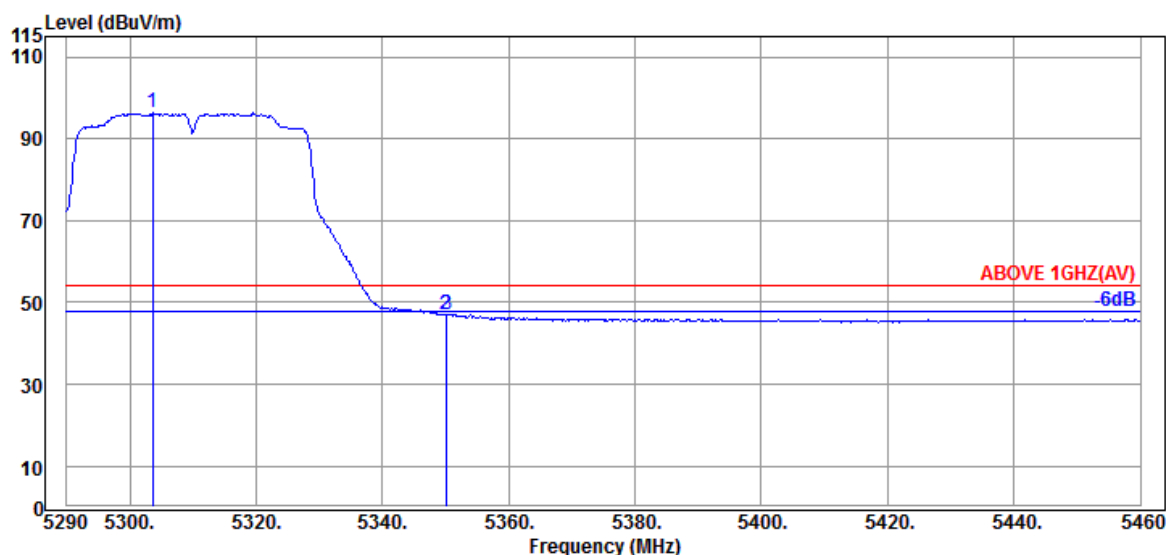

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5303.600	34.50	10.81	34.29	85.29	96.31	---	---	Average
	5350.010	34.60	10.83	34.27	35.94	47.10	54.00	6.90	Average
	5350.180	34.60	10.83	34.27	35.90	47.06	54.00	6.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

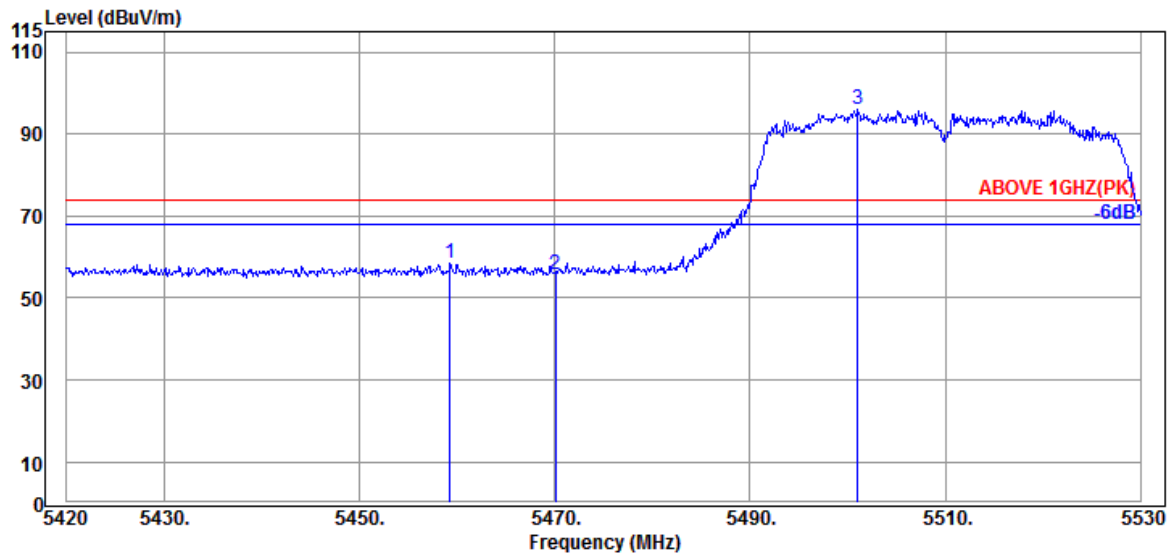

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.270	34.50	10.89	34.24	47.26	58.41	74.00	15.59	Peak
5470.050	34.47	10.91	34.24	44.74	55.88	74.00	18.12	Peak
@ 5501.070	34.40	10.93	34.24	84.80	95.89	---	---	Peak

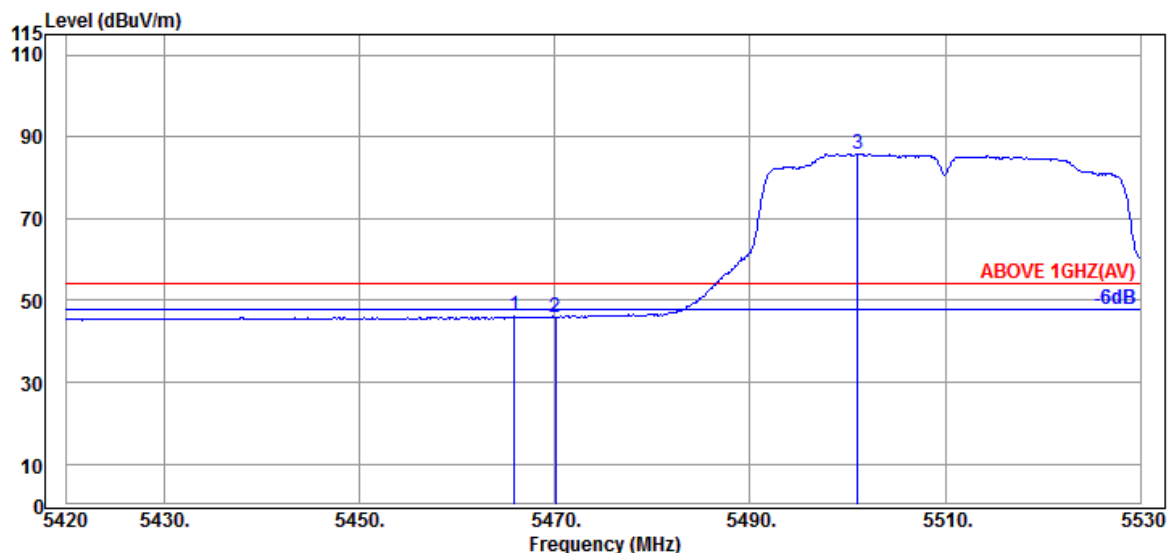

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.870	34.47	10.91	34.24	35.00	46.14	54.00	7.86	Average
5470.050	34.47	10.91	34.24	34.58	45.72	54.00	8.28	Average
@ 5501.070	34.40	10.93	34.24	74.71	85.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

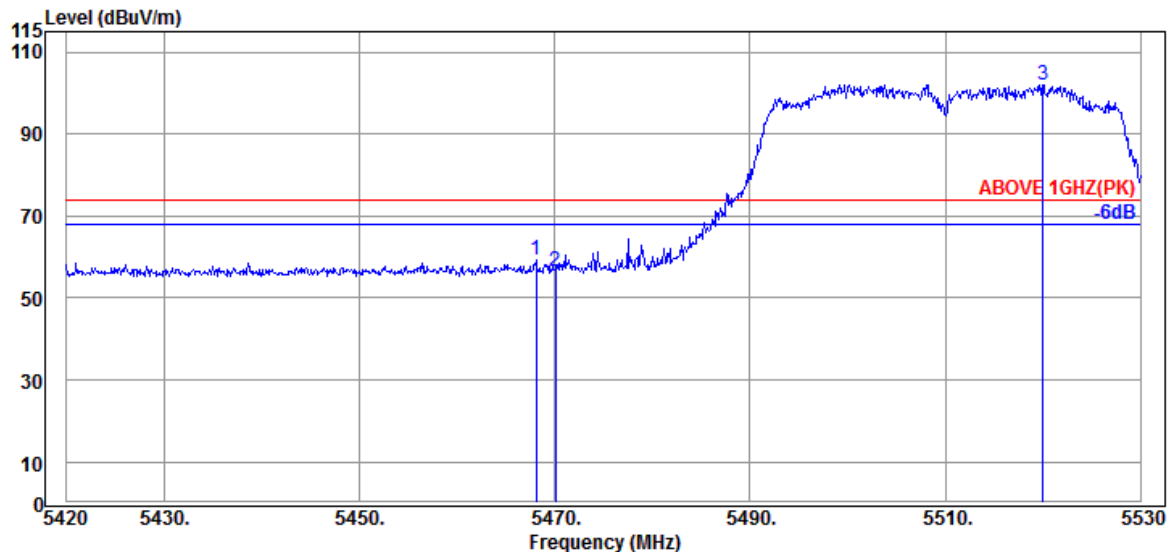

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.070	34.47	10.91	34.24	48.33	59.47	74.00	14.53	Peak
5470.050	34.47	10.91	34.24	45.55	56.69	74.00	17.31	Peak
@ 5519.990	34.37	10.93	34.24	91.06	102.12	---	---	Peak

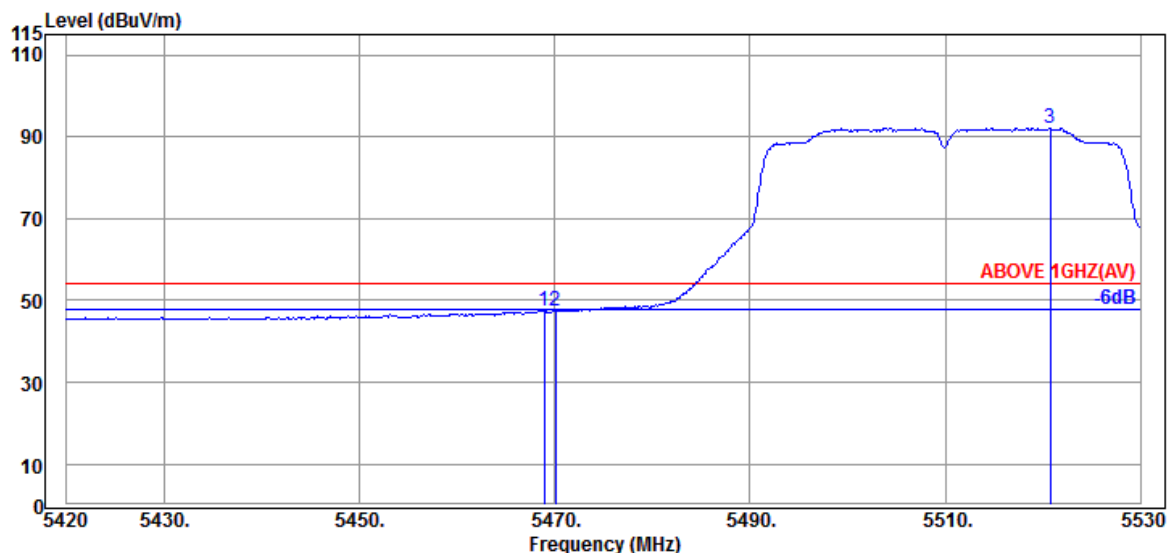

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.47	10.91	34.24	36.25	47.39	54.00	6.61	Average
5470.050	34.47	10.91	34.24	36.16	47.30	54.00	6.70	Average
@ 5520.760	34.37	10.93	34.24	81.00	92.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

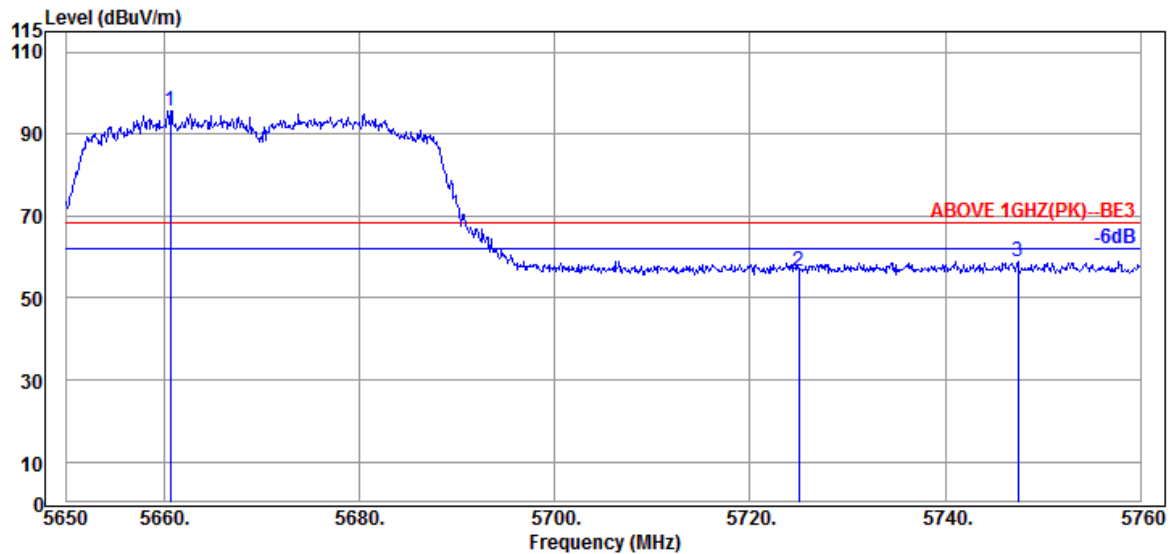

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5660.670	34.40	11.01	34.30	84.54	95.65	---	---	Peak
	5725.020	34.67	11.05	34.32	45.17	56.57	68.20	11.63	Peak
	5747.460	34.80	11.06	34.33	47.37	58.90	68.20	9.30	Peak

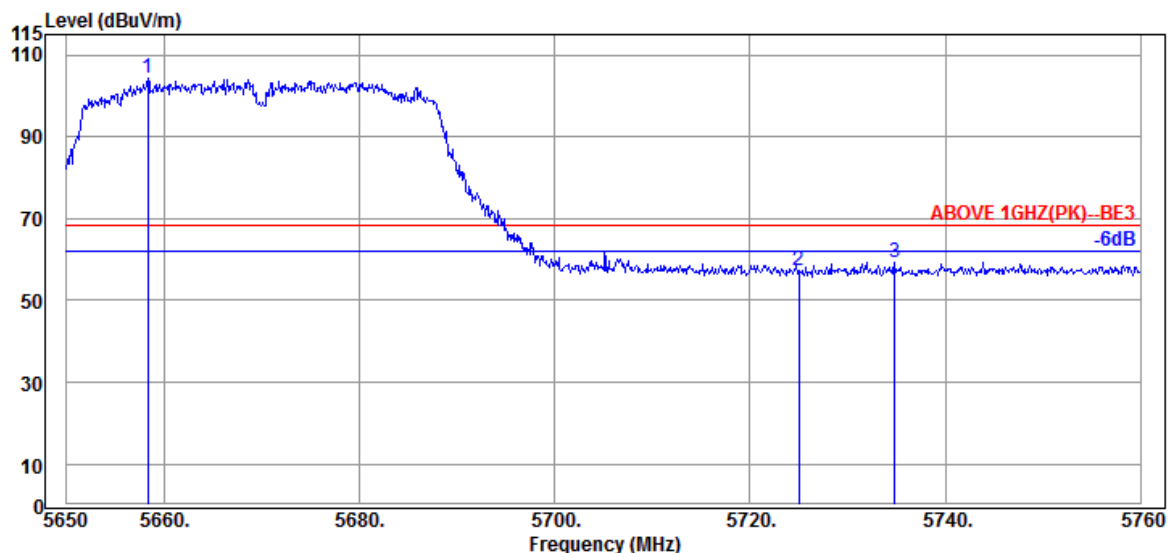

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5658.360	34.40	11.01	34.30	93.22	104.33	---	---	Peak
	5725.020	34.67	11.05	34.32	45.93	57.33	68.20	10.87	Peak
	5734.810	34.67	11.05	34.33	47.97	59.36	68.20	8.84	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

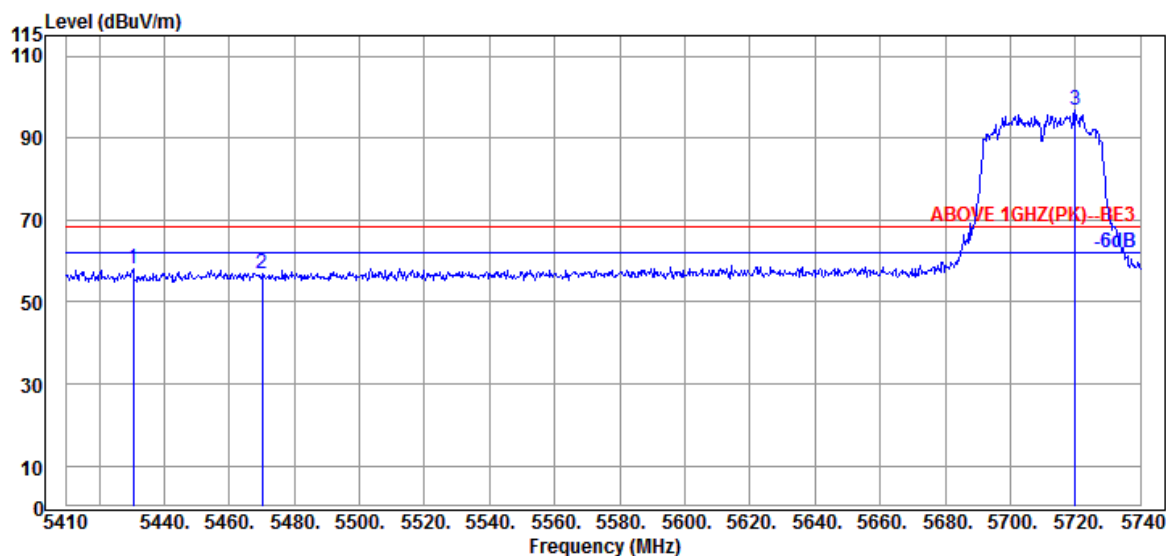

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.460	34.60	10.89	34.25	46.77	58.01	68.20	10.19	Peak
5470.060	34.47	10.91	34.24	45.73	56.87	68.20	11.33	Peak
@ 5719.870	34.53	11.05	34.32	85.60	96.86	---	---	Peak

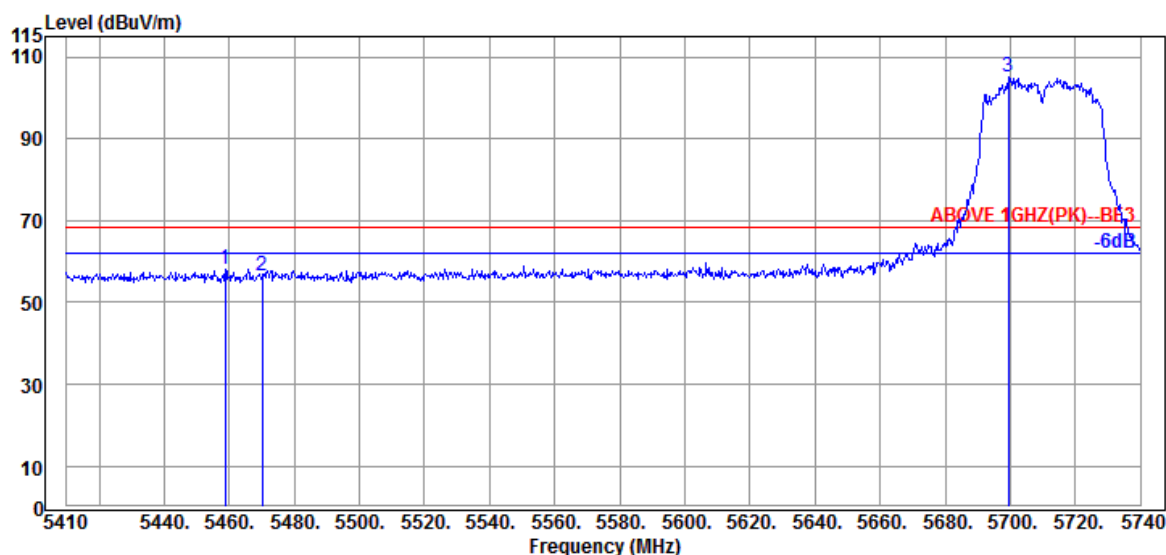

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.840	34.50	10.89	34.24	46.80	57.95	68.20	10.25	Peak
5470.060	34.47	10.91	34.24	45.21	56.35	68.20	11.85	Peak
@ 5699.410	34.40	11.03	34.31	93.95	105.07	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

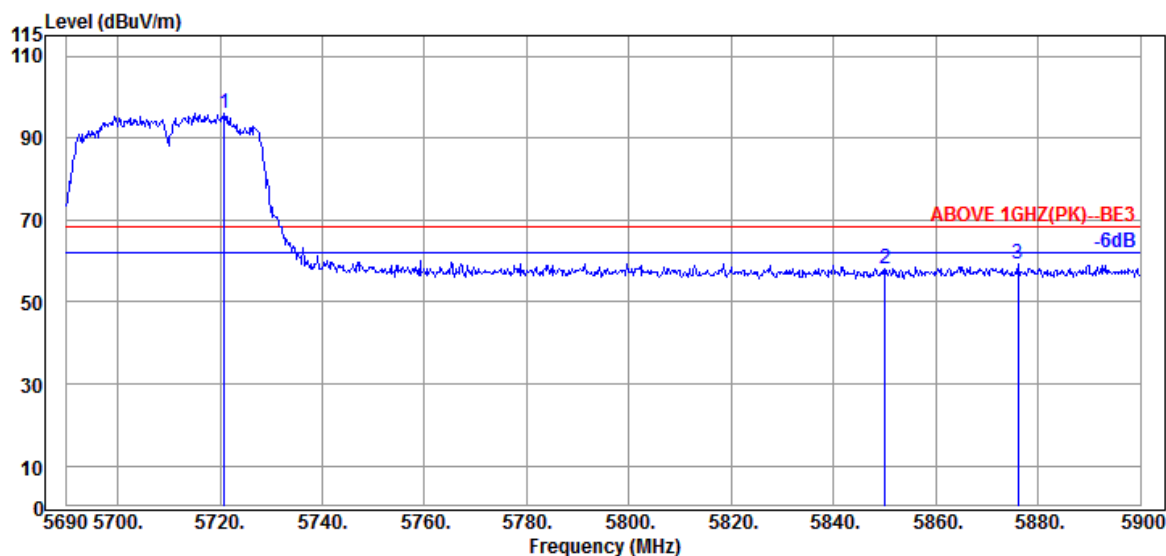

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.870	34.53	11.05	34.32	84.66	95.92	---	---	Peak
5850.020	35.10	11.10	34.38	46.10	57.92	68.20	10.28	Peak
5876.060	35.30	11.12	34.39	47.31	59.34	68.20	8.86	Peak

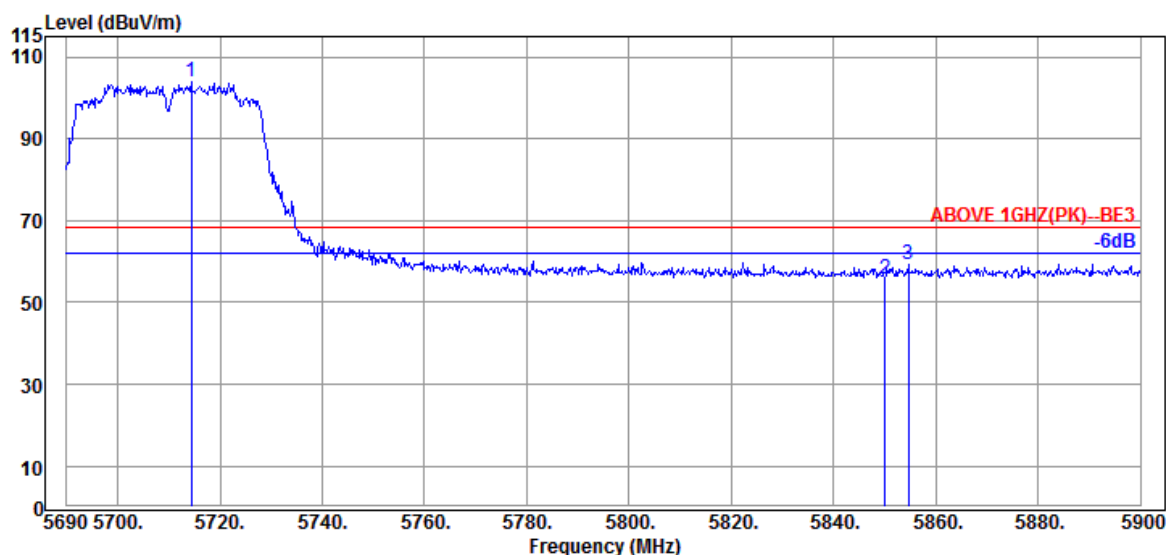

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.360	34.53	11.05	34.32	92.60	103.86	---	---	Peak
5850.020	35.10	11.10	34.38	44.07	55.89	68.20	12.31	Peak
5854.640	35.10	11.10	34.38	47.52	59.34	68.20	8.86	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

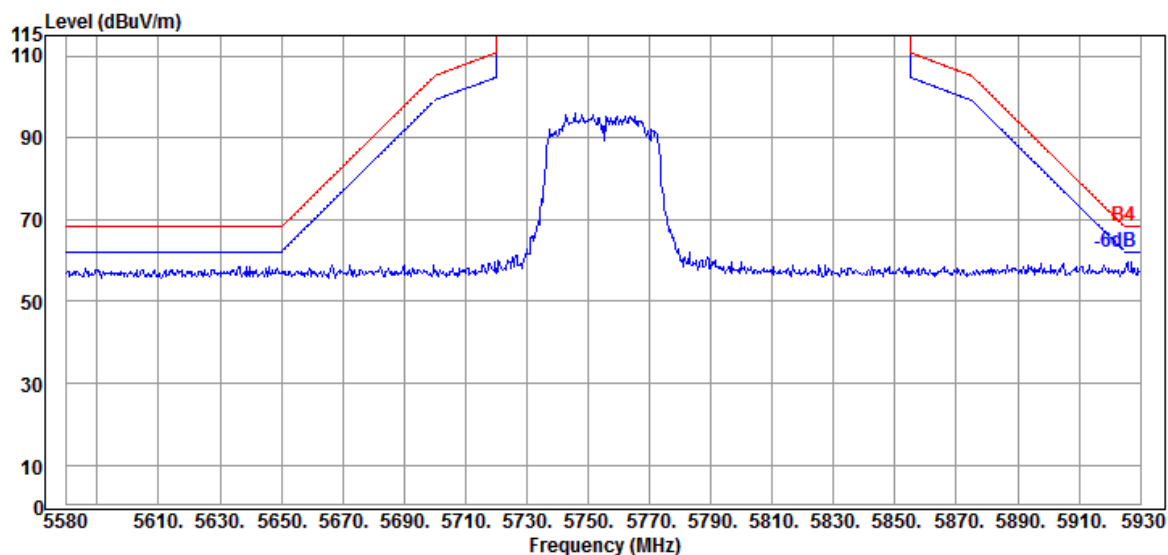

Antenna at Vertical Polarization

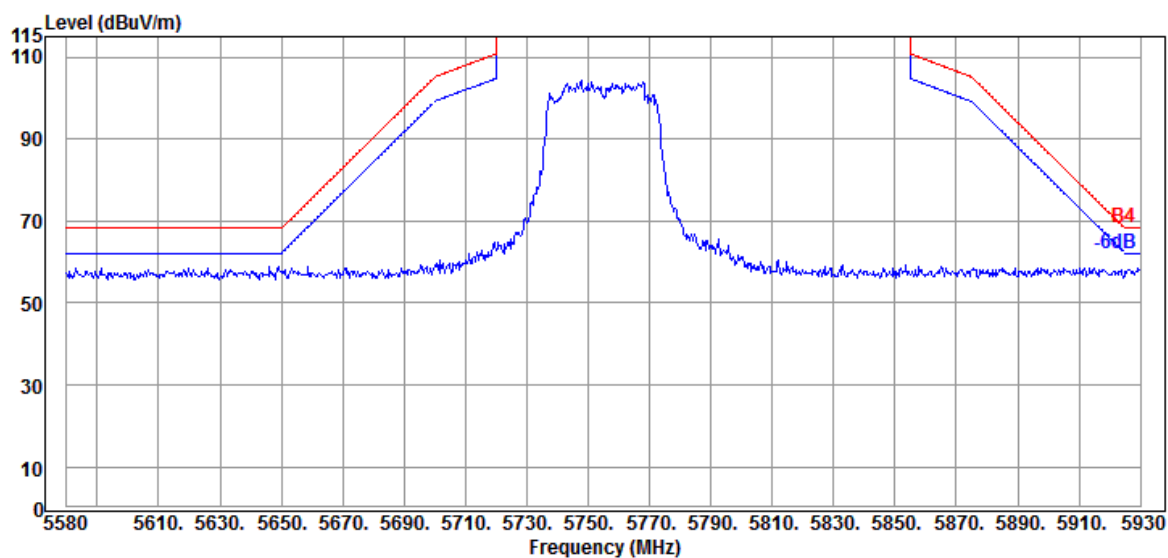


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

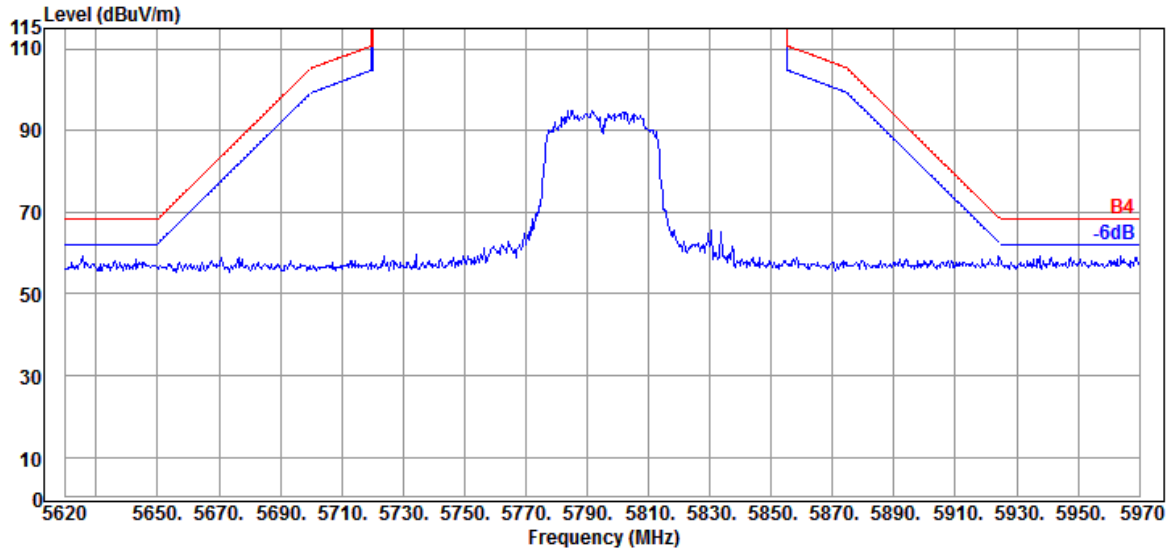

Antenna at Vertical Polarization

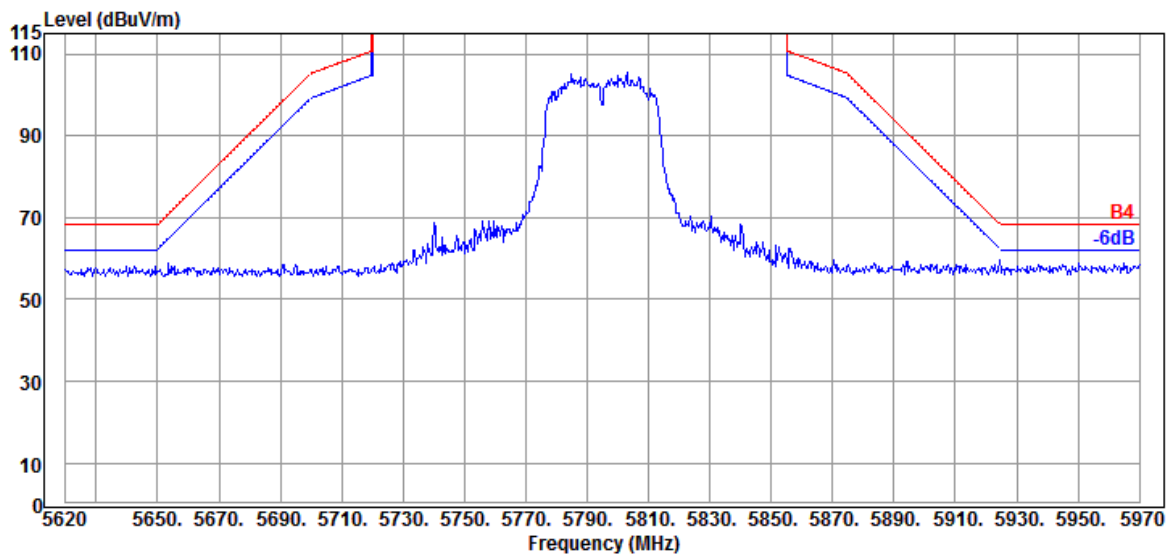

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

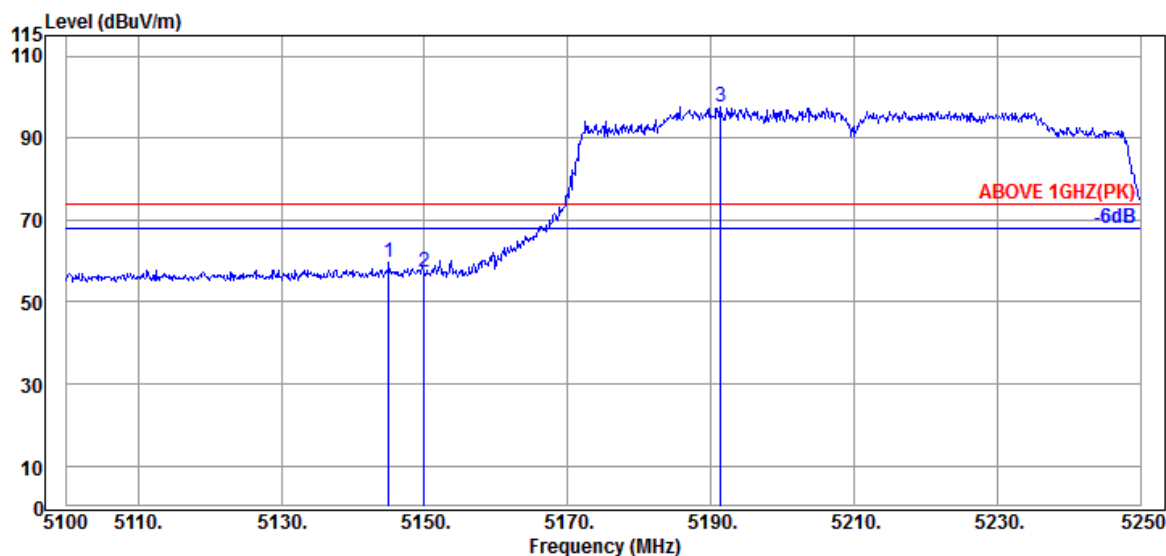

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	34.20	10.70	34.35	49.02	59.57	74.00	14.43	Peak
5149.950	34.20	10.70	34.35	46.88	57.43	74.00	16.57	Peak
@ 5191.350	34.20	10.74	34.34	86.85	97.45	---	---	Peak

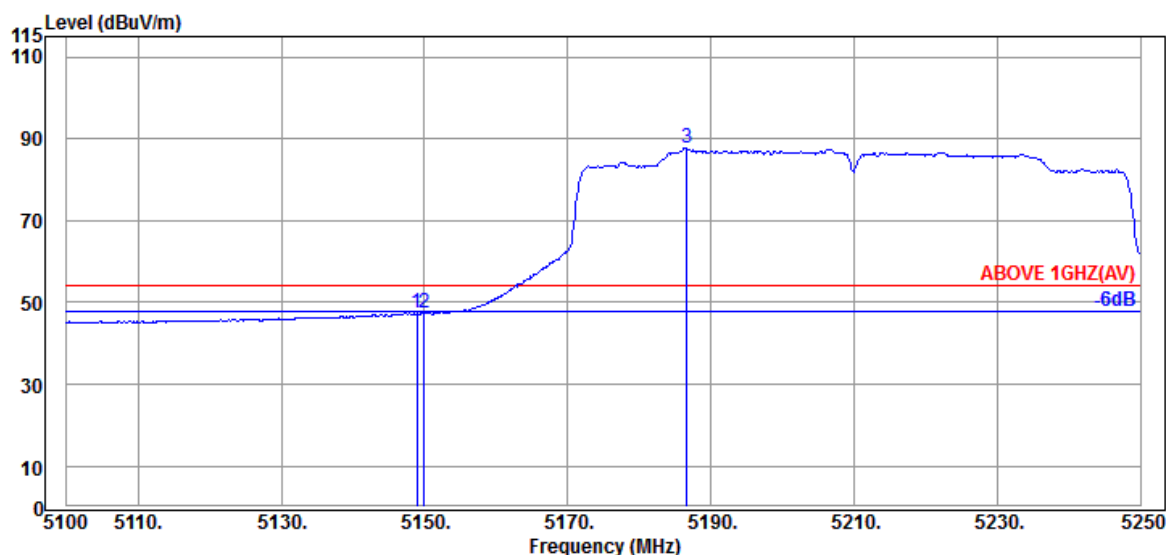

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.20	10.70	34.35	36.87	47.42	54.00	6.58	Average
5149.950	34.20	10.70	34.35	36.85	47.40	54.00	6.60	Average
@ 5186.700	34.20	10.72	34.34	77.13	87.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

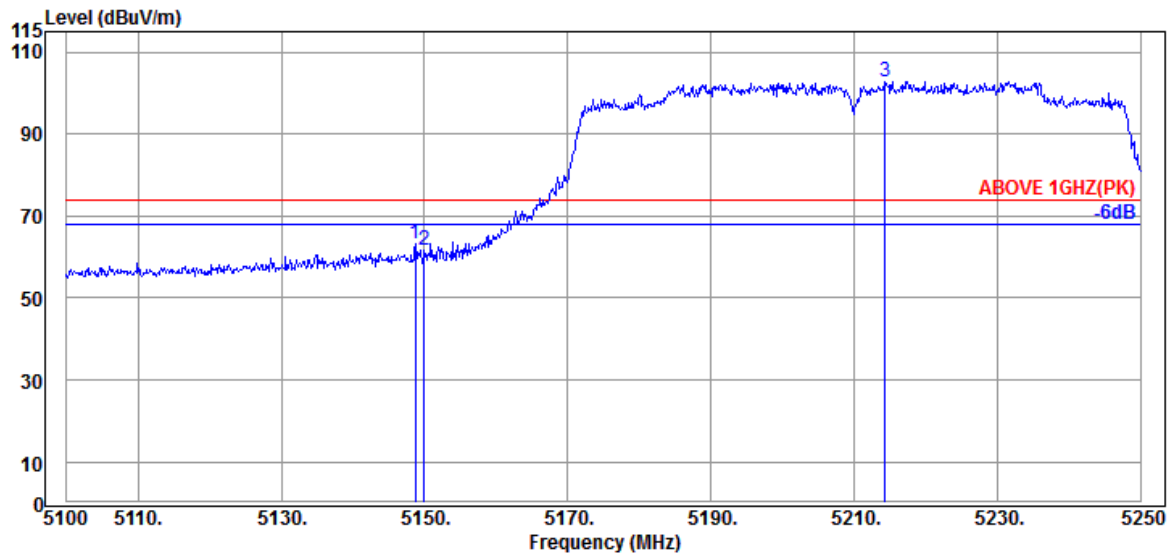

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.20	10.70	34.35	52.49	63.04	74.00	10.96	Peak
5149.950	34.20	10.70	34.35	51.22	61.77	74.00	12.23	Peak
@ 5214.300	34.25	10.74	34.33	92.27	102.93	---	---	Peak

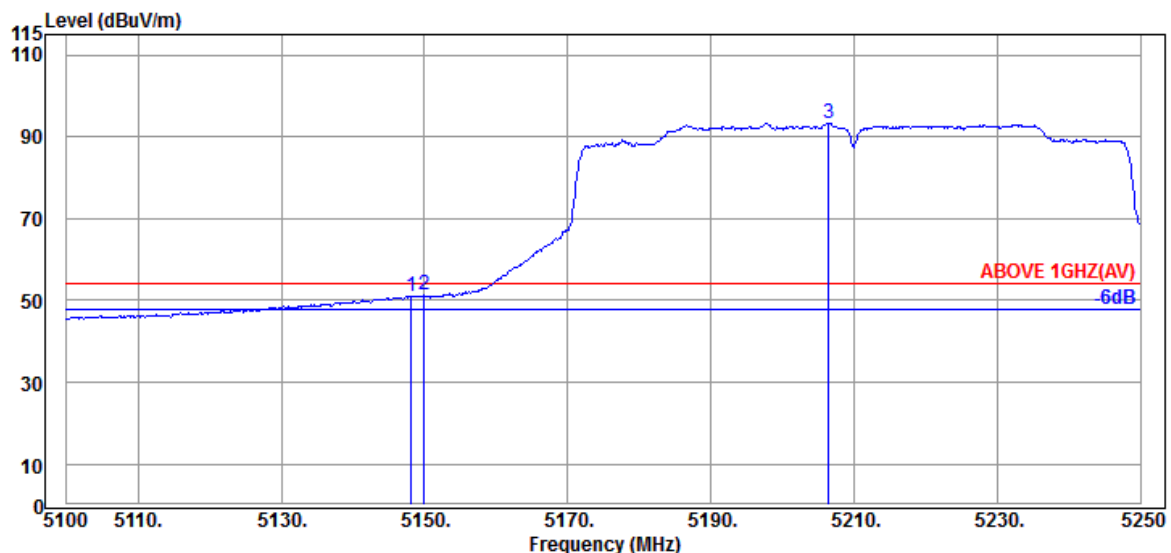

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.150	34.20	10.70	34.35	40.62	51.17	54.00	2.83	Average
5149.950	34.20	10.70	34.35	40.64	51.19	54.00	2.81	Average
@ 5206.500	34.25	10.74	34.33	82.63	93.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

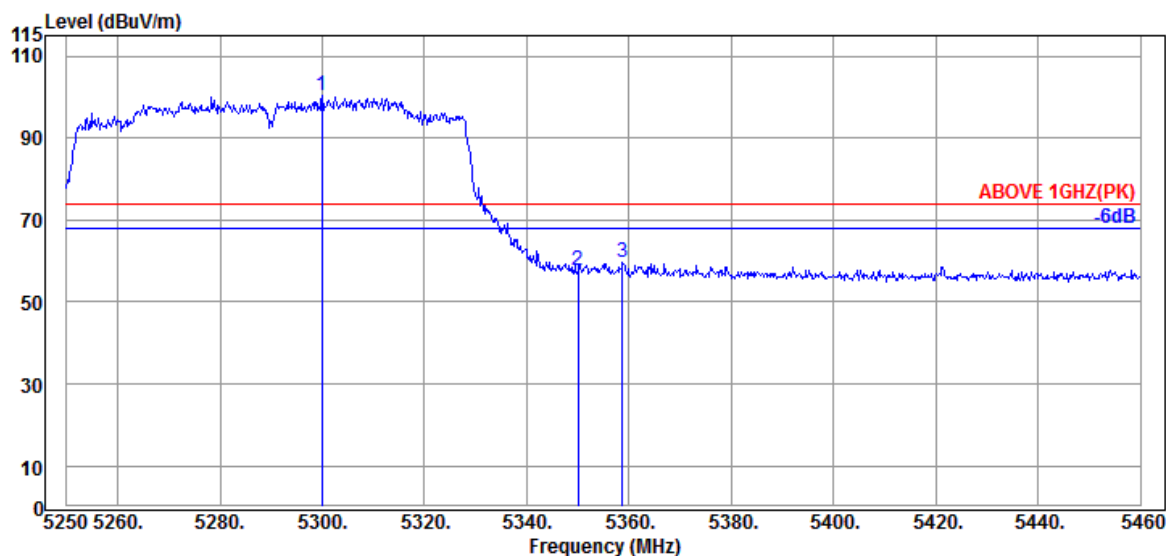

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.980	34.50	10.81	34.29	89.23	100.25	---	---	Peak
5349.960	34.60	10.83	34.27	46.52	57.68	74.00	16.32	Peak
5358.780	34.63	10.85	34.27	48.32	59.53	74.00	14.47	Peak

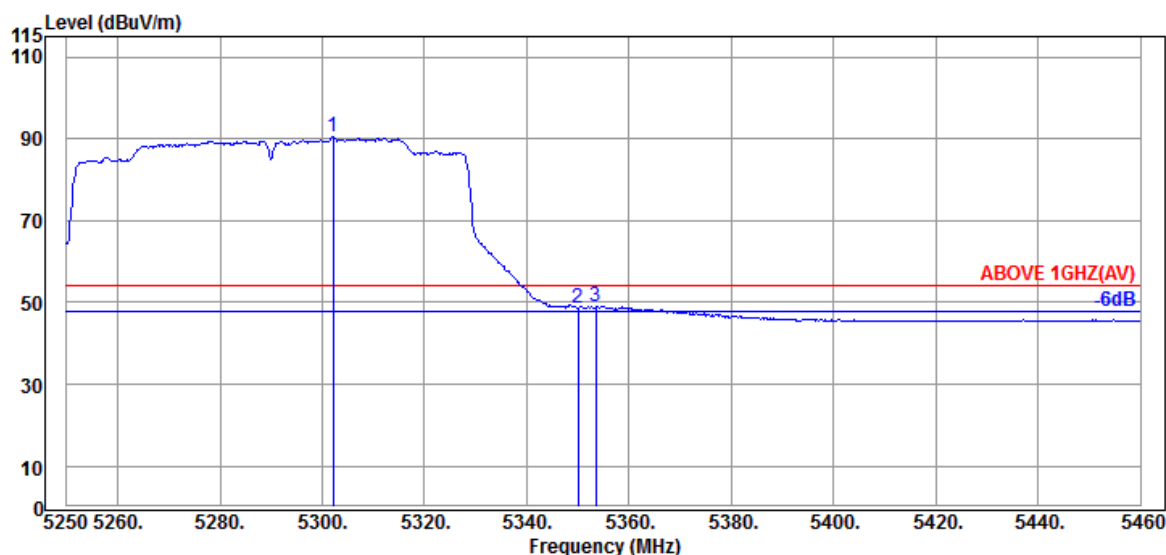

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.080	34.50	10.81	34.29	79.47	90.49	---	---	Average
5349.960	34.60	10.83	34.27	37.51	48.67	54.00	5.33	Average
5353.530	34.60	10.83	34.27	37.93	49.09	54.00	4.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

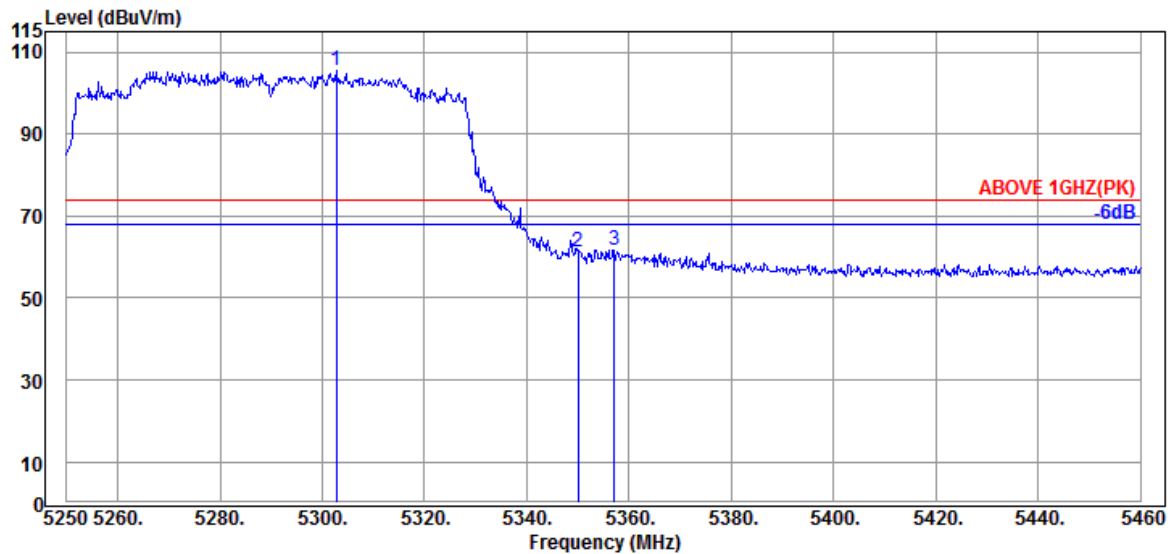

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.710	34.50	10.81	34.29	94.59	105.61	---	---	Peak
5349.960	34.60	10.83	34.27	50.26	61.42	74.00	12.58	Peak
5357.100	34.63	10.85	34.27	50.43	61.64	74.00	12.36	Peak

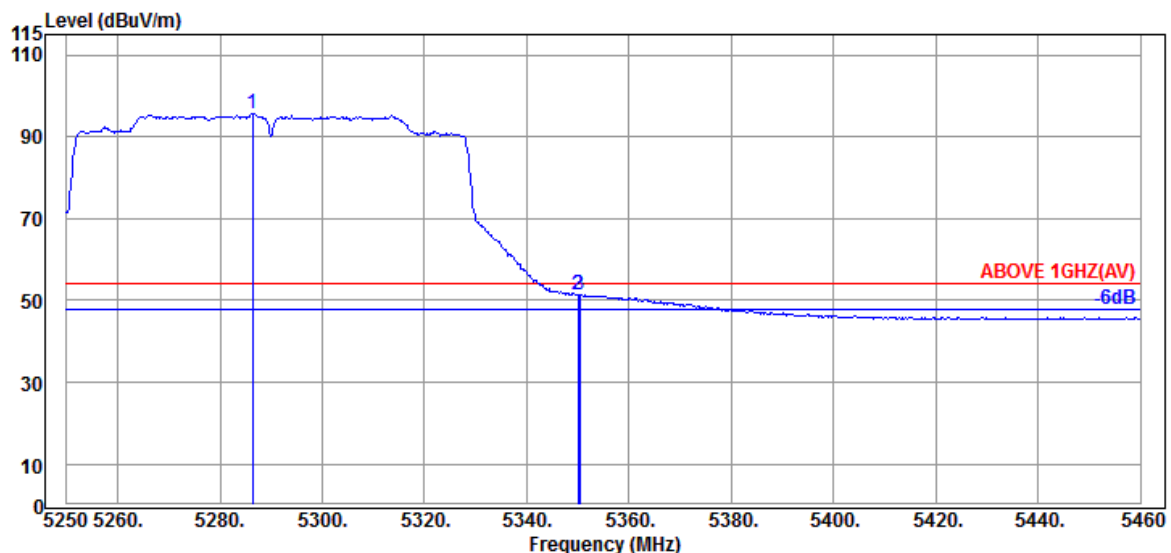

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.330	34.47	10.79	34.30	84.78	95.74	---	---	Average
5349.960	34.60	10.83	34.27	40.22	51.38	54.00	2.62	Average
5350.380	34.60	10.83	34.27	40.32	51.48	54.00	2.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

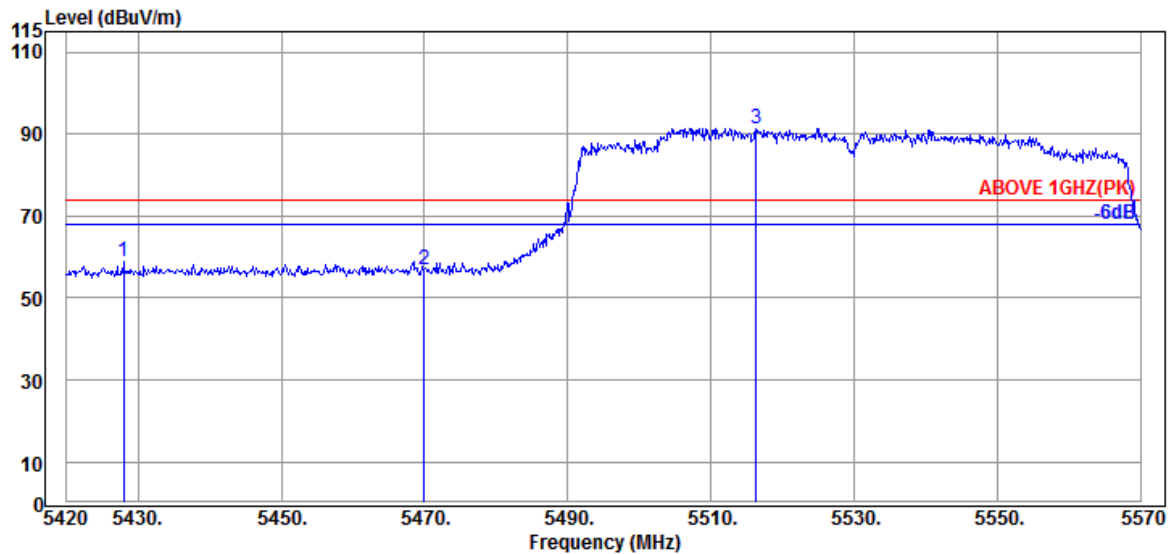

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.950	34.60	10.89	34.25	47.80	59.04	74.00	14.96	Peak
5469.950	34.47	10.91	34.24	45.60	56.74	74.00	17.26	Peak
@ 5516.300	34.37	10.93	34.24	80.40	91.46	---	---	Peak

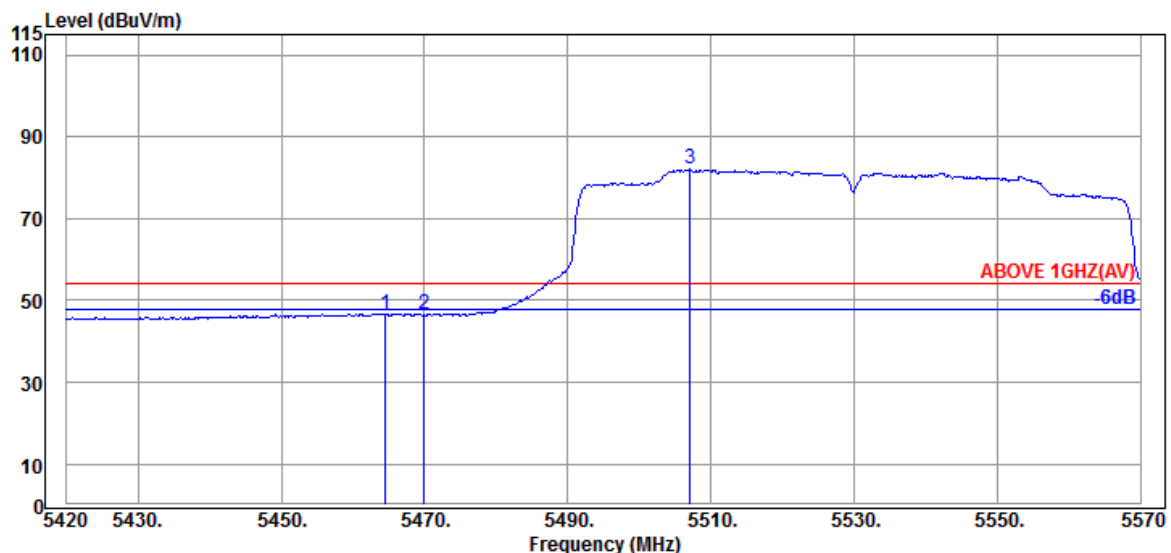

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.550	34.47	10.91	34.24	35.58	46.72	54.00	7.28	Average
5469.950	34.47	10.91	34.24	35.31	46.45	54.00	7.55	Average
@ 5507.150	34.40	10.93	34.24	70.98	82.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

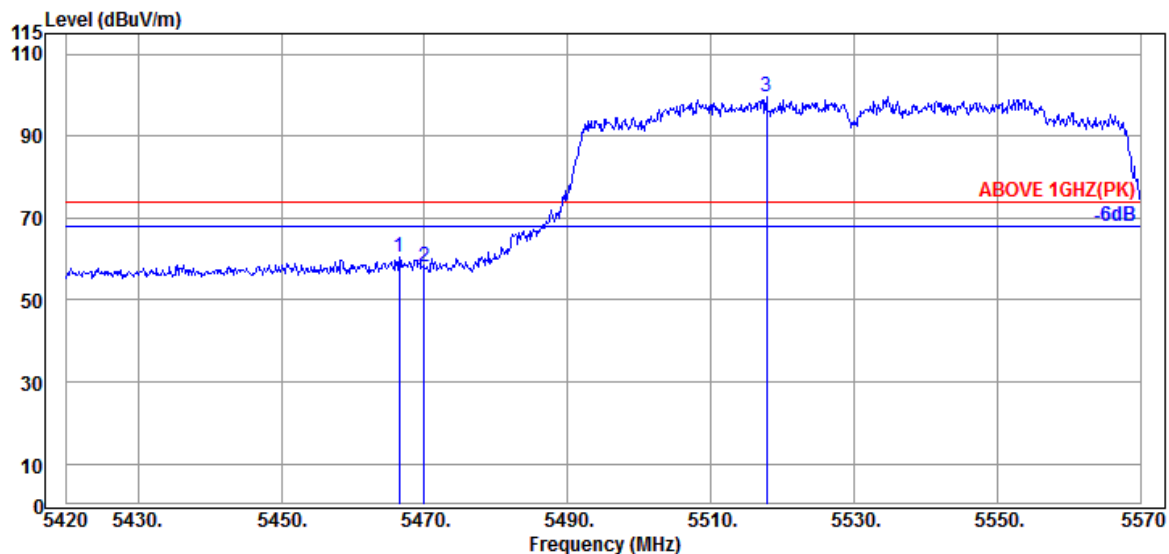

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.47	10.91	34.24	49.50	60.64	74.00	13.36	Peak
5469.950	34.47	10.91	34.24	46.85	57.99	74.00	16.01	Peak
@ 5517.800	34.37	10.93	34.24	88.49	99.55	---	---	Peak

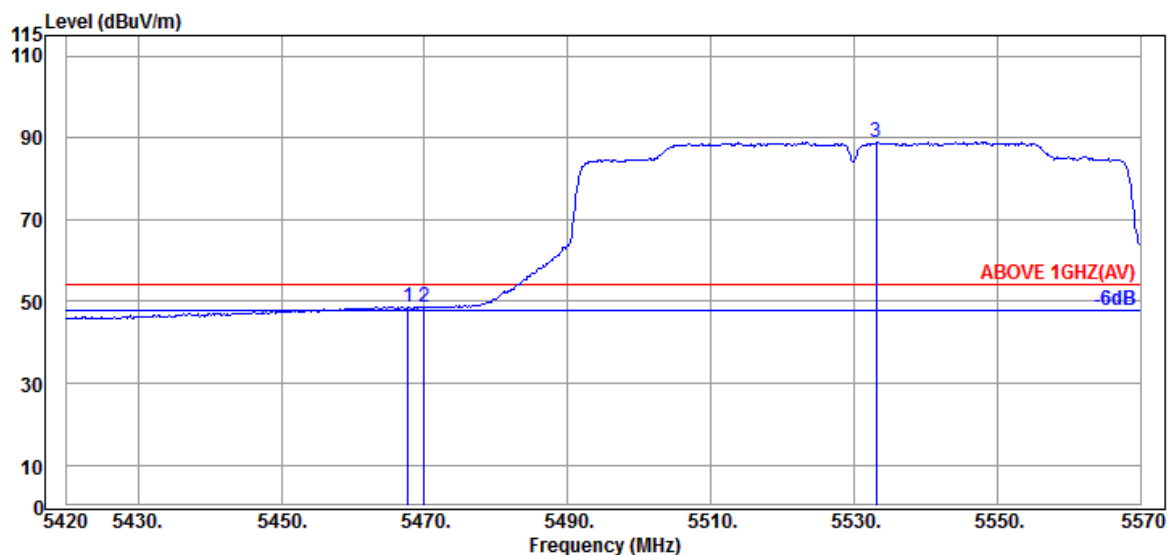

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.47	10.91	34.24	37.53	48.67	54.00	5.33	Average
5469.950	34.47	10.91	34.24	37.45	48.59	54.00	5.41	Average
@ 5533.100	34.33	10.95	34.25	77.91	88.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

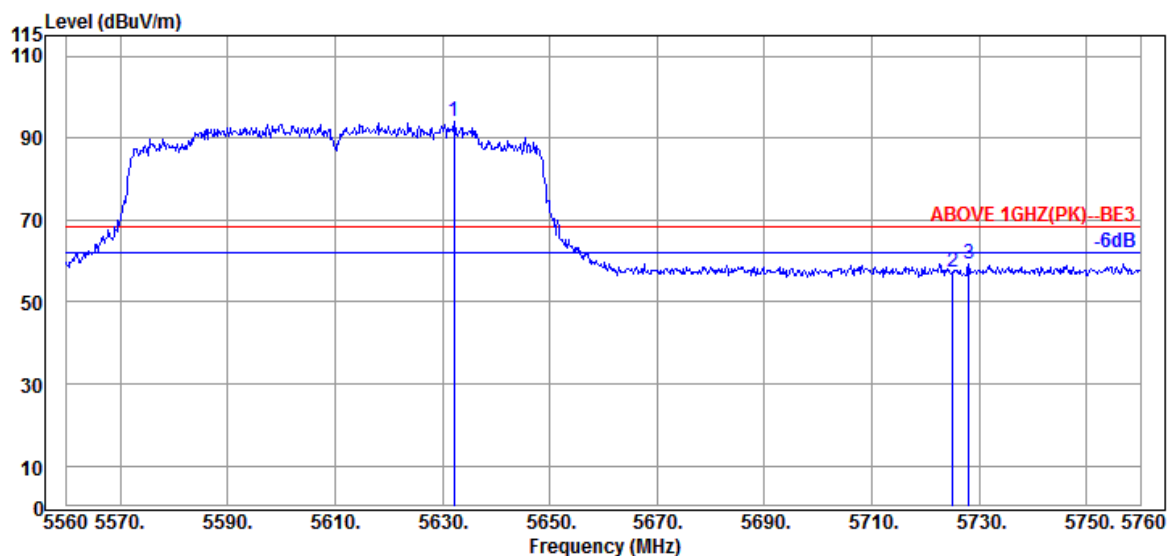

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5632.200	34.40	10.99	34.29	83.03	94.13	---	---	Peak
5725.000	34.67	11.05	34.32	45.88	57.28	68.20	10.92	Peak
5728.000	34.67	11.05	34.32	47.85	59.25	68.20	8.95	Peak

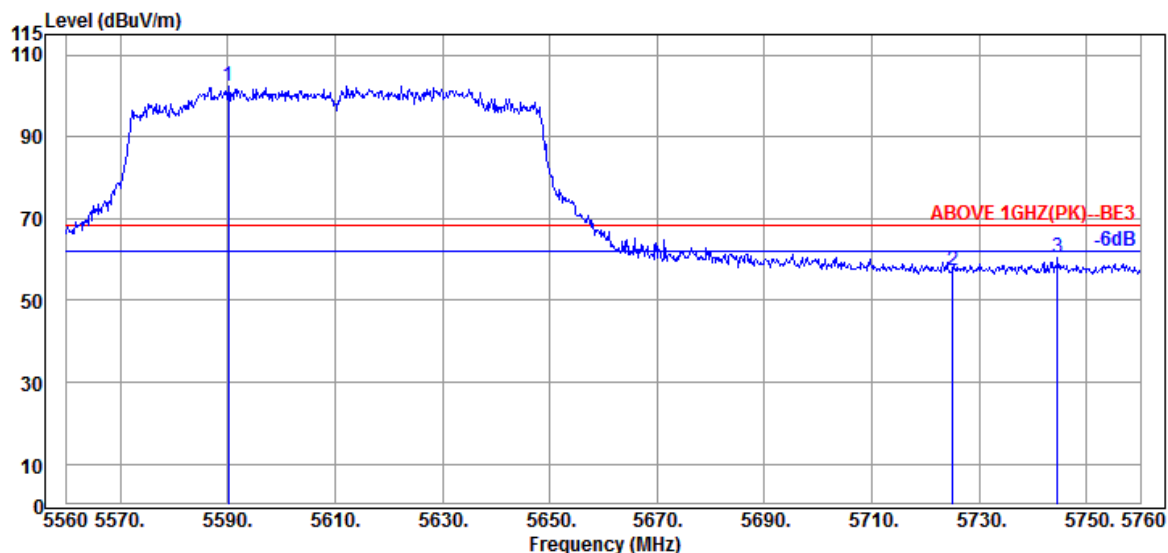

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5590.200	34.37	10.97	34.27	91.32	102.39	---	---	Peak
5725.000	34.67	11.05	34.32	46.03	57.43	68.20	10.77	Peak
5744.600	34.80	11.05	34.33	48.93	60.45	68.20	7.75	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

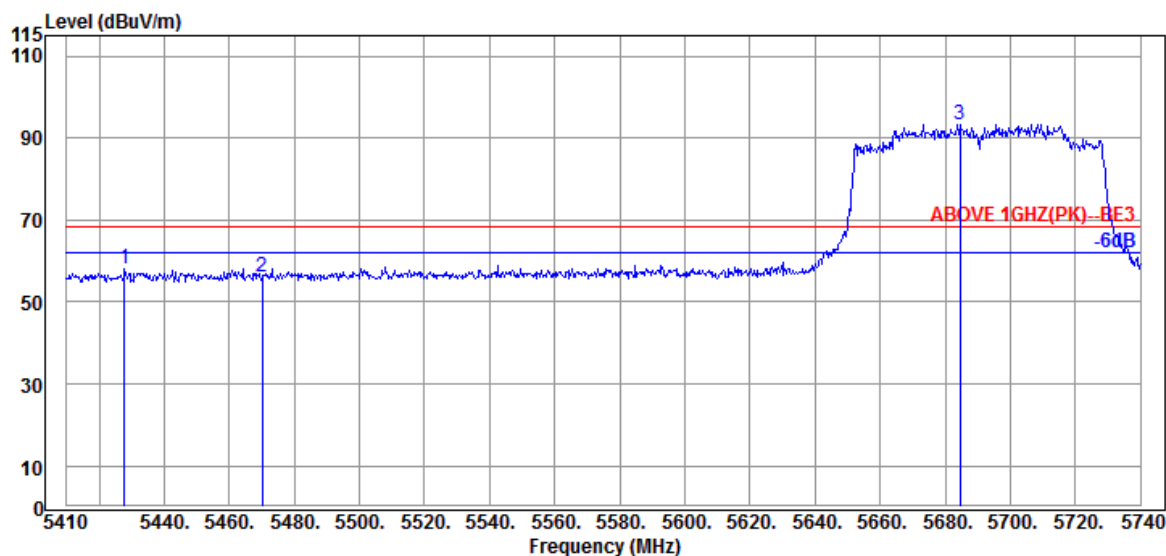

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.820	34.60	10.89	34.25	47.03	58.27	68.20	9.93	Peak
5470.060	34.47	10.91	34.24	45.02	56.16	68.20	12.04	Peak
@ 5684.560	34.40	11.03	34.31	82.30	93.42	---	---	Peak

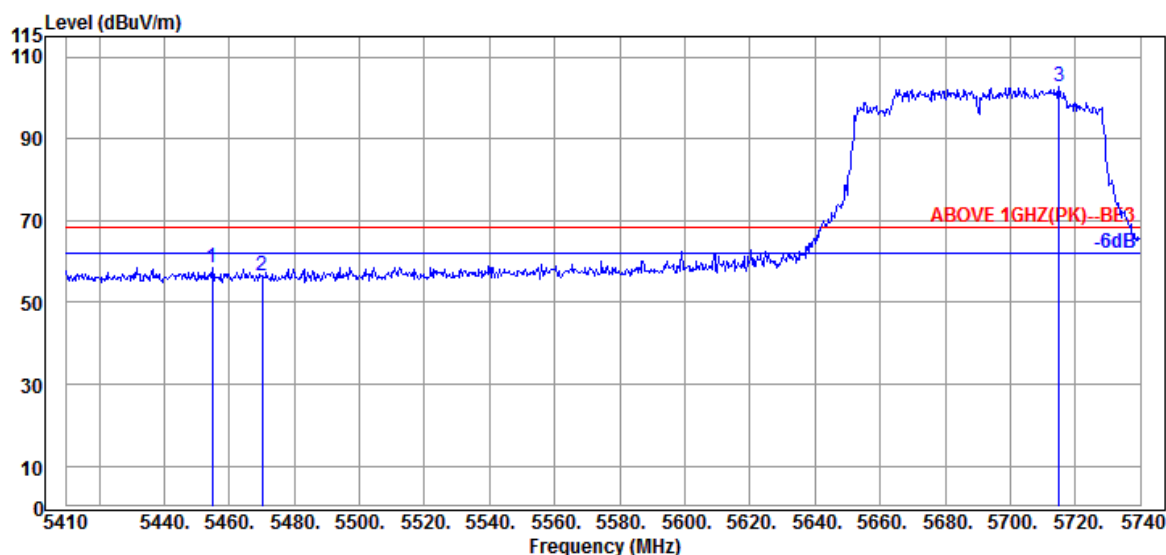

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.880	34.50	10.89	34.24	47.24	58.39	68.20	9.81	Peak
5470.060	34.47	10.91	34.24	45.25	56.39	68.20	11.81	Peak
@ 5714.920	34.53	11.05	34.32	91.37	102.63	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

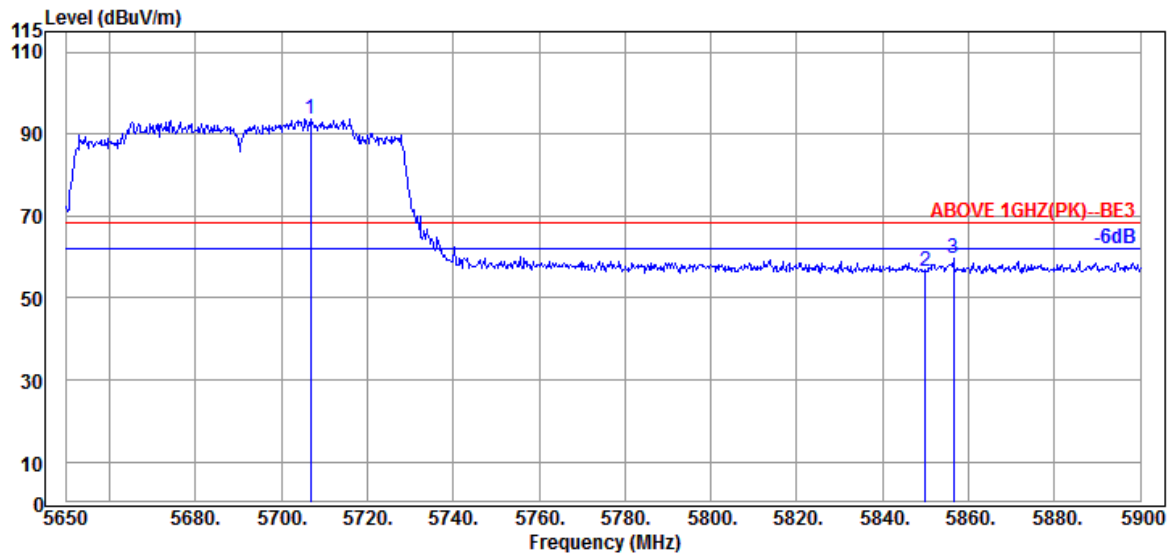

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.750	34.53	11.03	34.32	82.55	93.79	---	---	Peak
	5850.000	35.10	11.10	34.38	44.66	56.48	68.20	11.72	Peak
	5856.500	35.20	11.10	34.38	47.79	59.71	68.20	8.49	Peak

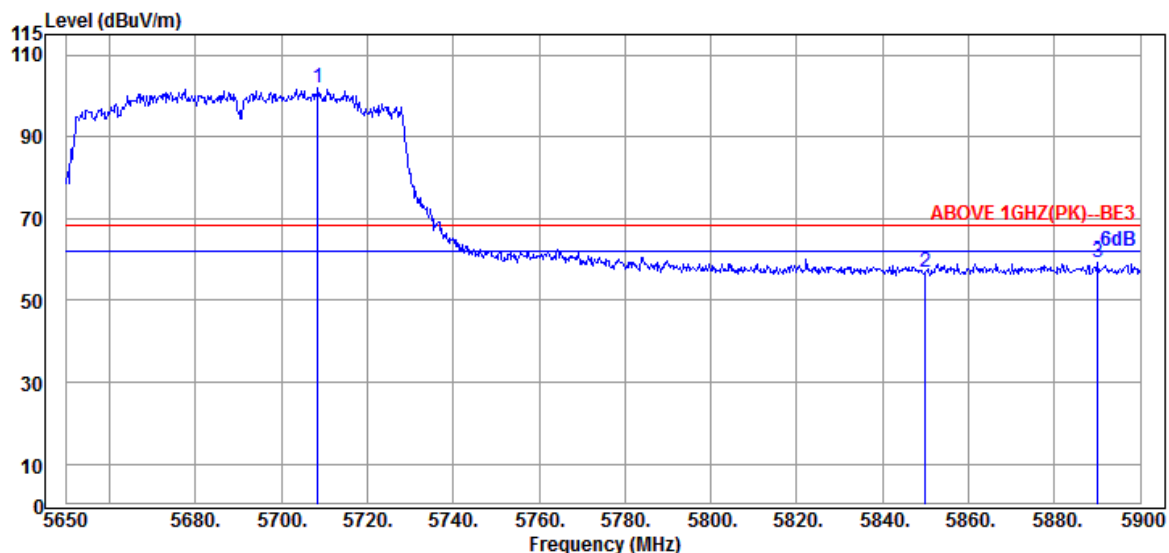

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.500	34.53	11.03	34.32	90.62	101.86	---	---	Peak
	5850.000	35.10	11.10	34.38	44.95	56.77	68.20	11.43	Peak
	5890.000	35.40	11.12	34.40	47.33	59.45	68.20	8.75	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

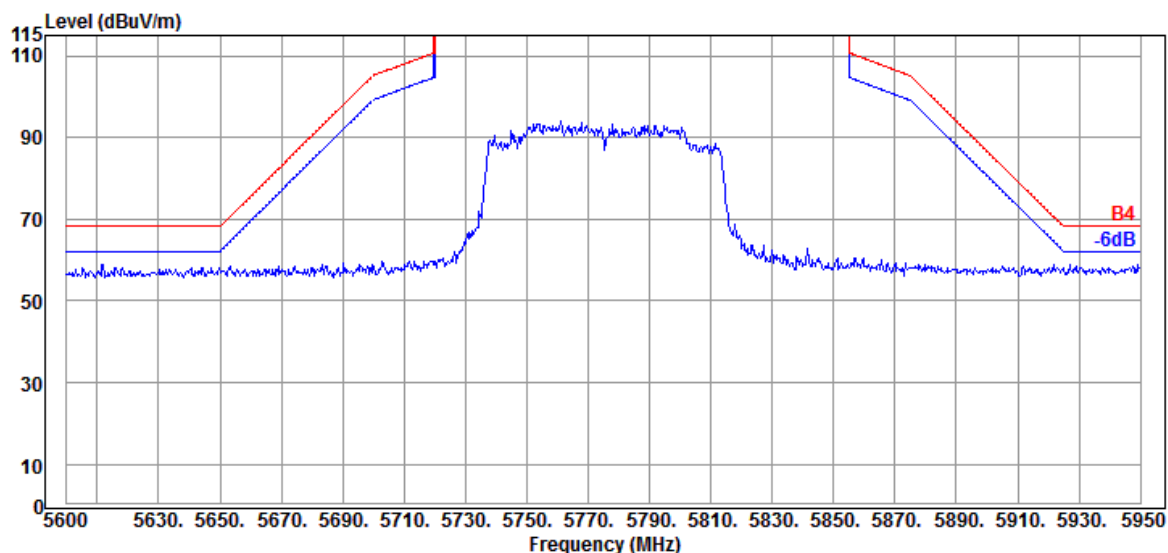

Antenna at Vertical Polarization

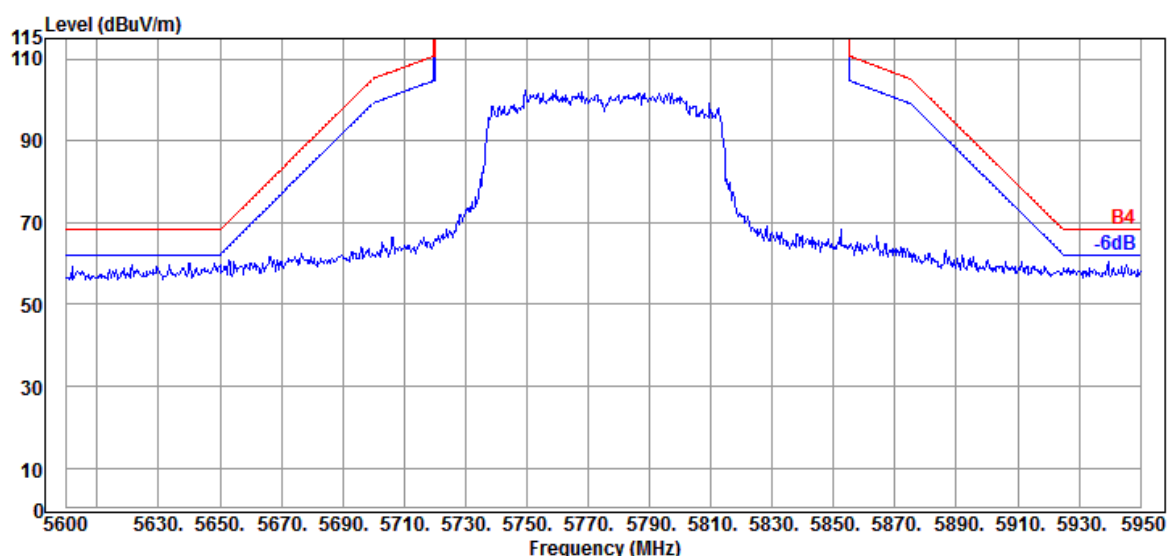

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

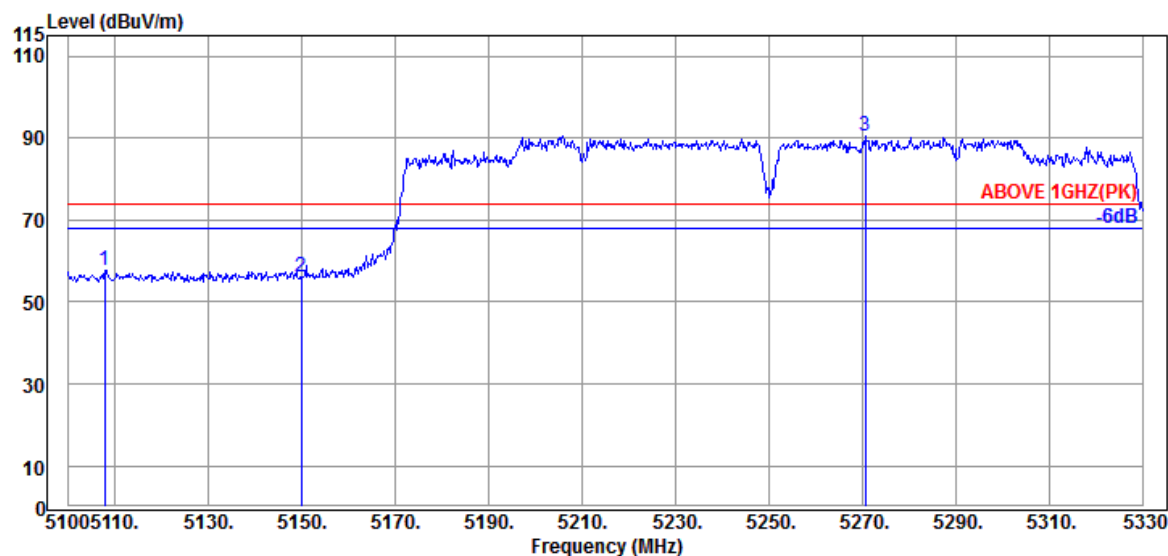

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.820	34.10	10.68	34.36	47.45	57.87	74.00	16.13	Peak
5149.910	34.20	10.70	34.35	45.42	55.97	74.00	18.03	Peak
@ 5270.660	34.43	10.79	34.31	79.46	90.37	---	---	Peak

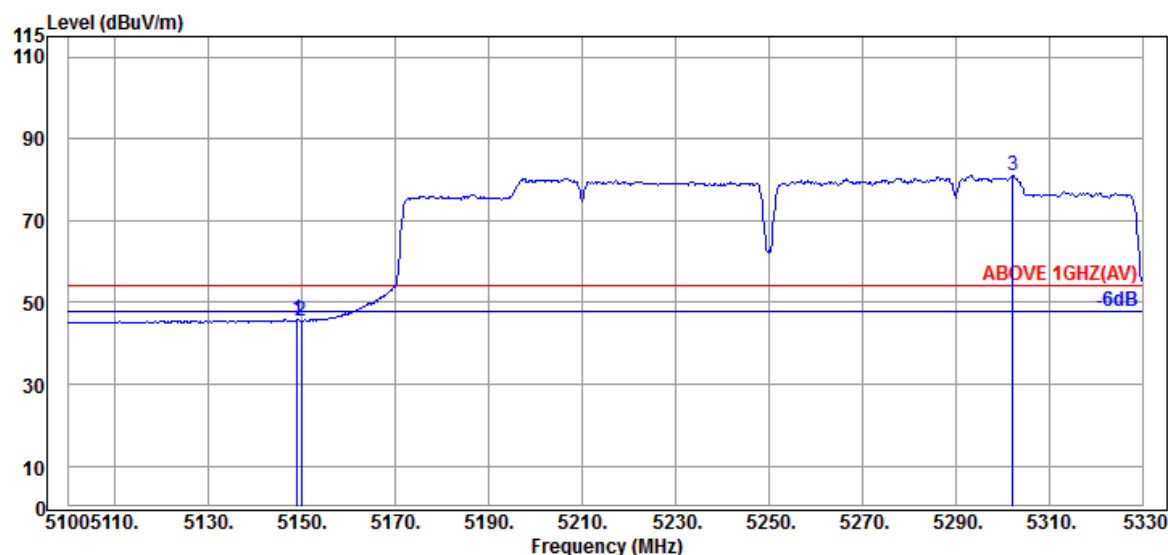

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.20	10.70	34.35	35.25	45.80	54.00	8.20	Average
5149.910	34.20	10.70	34.35	34.87	45.42	54.00	8.58	Average
@ 5302.170	34.50	10.81	34.29	70.06	81.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

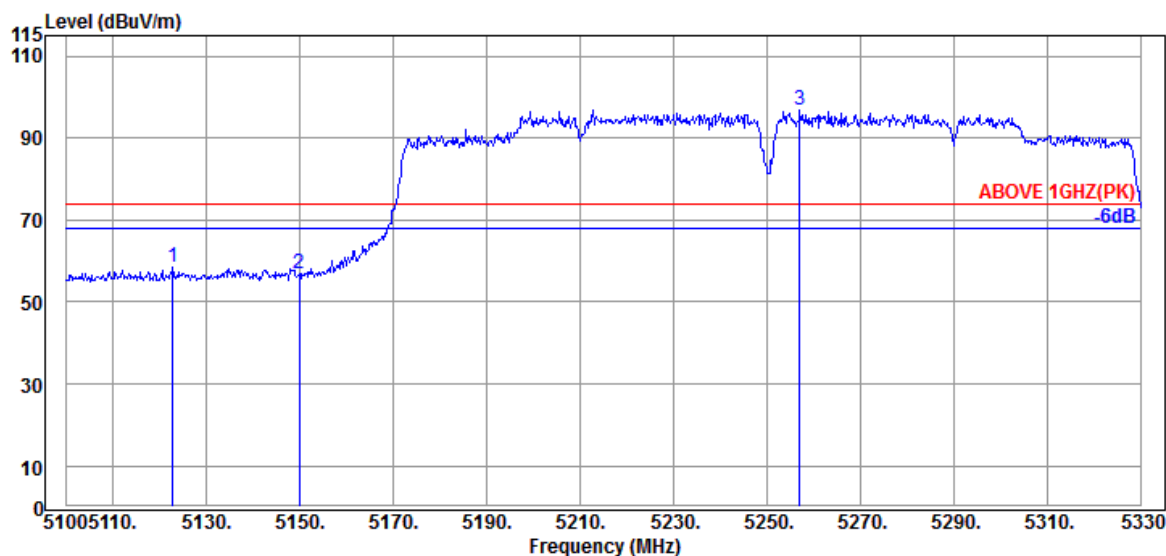

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.770	34.13	10.70	34.36	47.86	58.33	74.00	15.67	Peak
5149.910	34.20	10.70	34.35	46.42	56.97	74.00	17.03	Peak
@ 5257.090	34.40	10.79	34.31	85.89	96.77	---	---	Peak

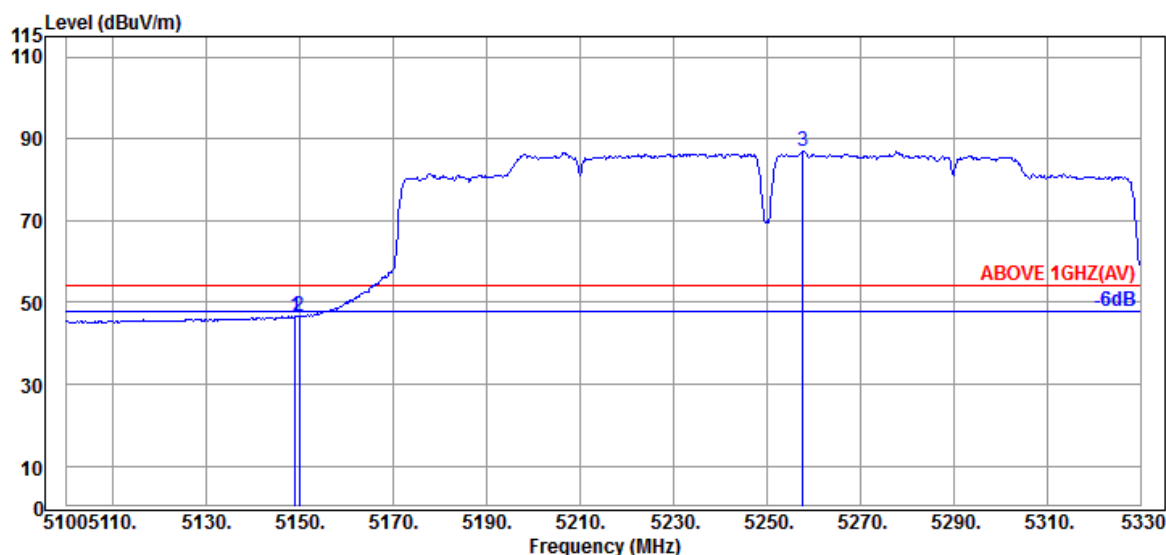

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.20	10.70	34.35	36.16	46.71	54.00	7.29	Average
5149.910	34.20	10.70	34.35	35.95	46.50	54.00	7.50	Average
@ 5257.780	34.40	10.79	34.31	75.95	86.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

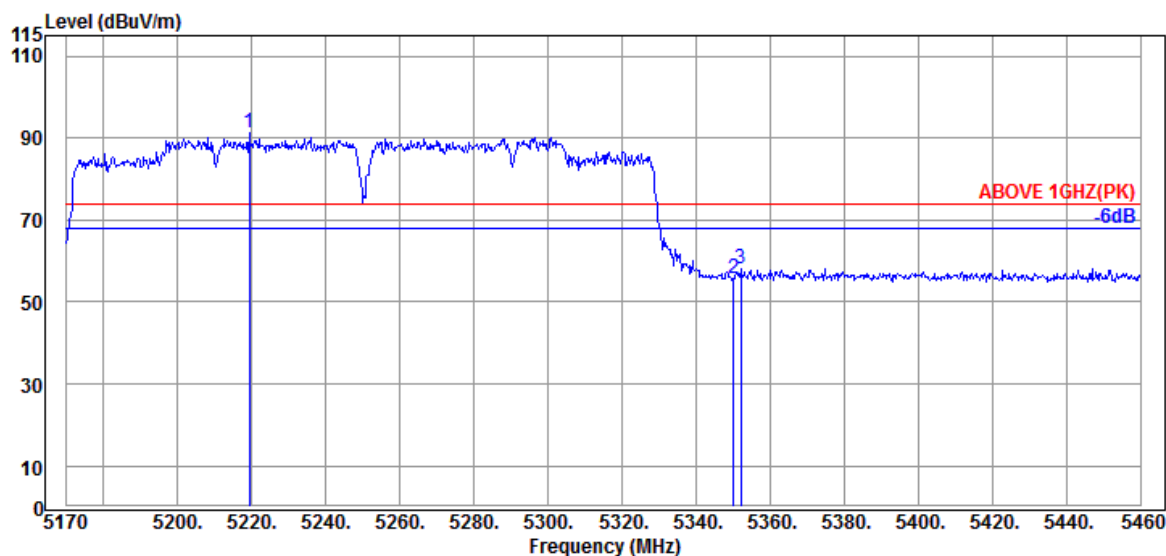

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5219.300	34.30	10.74	34.33	80.41	91.12	---	---	Peak
5350.090	34.60	10.83	34.27	44.44	55.60	74.00	18.40	Peak
5352.120	34.60	10.83	34.27	47.11	58.27	74.00	15.73	Peak

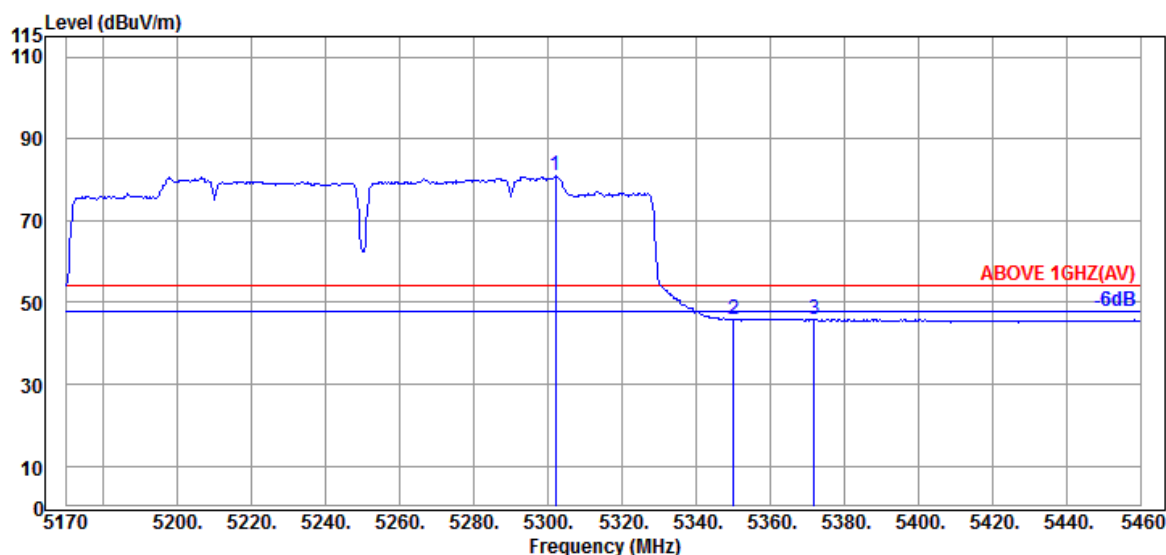

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.950	34.50	10.81	34.29	69.81	80.83	---	---	Average
5350.090	34.60	10.83	34.27	34.71	45.87	54.00	8.13	Average
5371.840	34.67	10.85	34.27	34.73	45.98	54.00	8.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

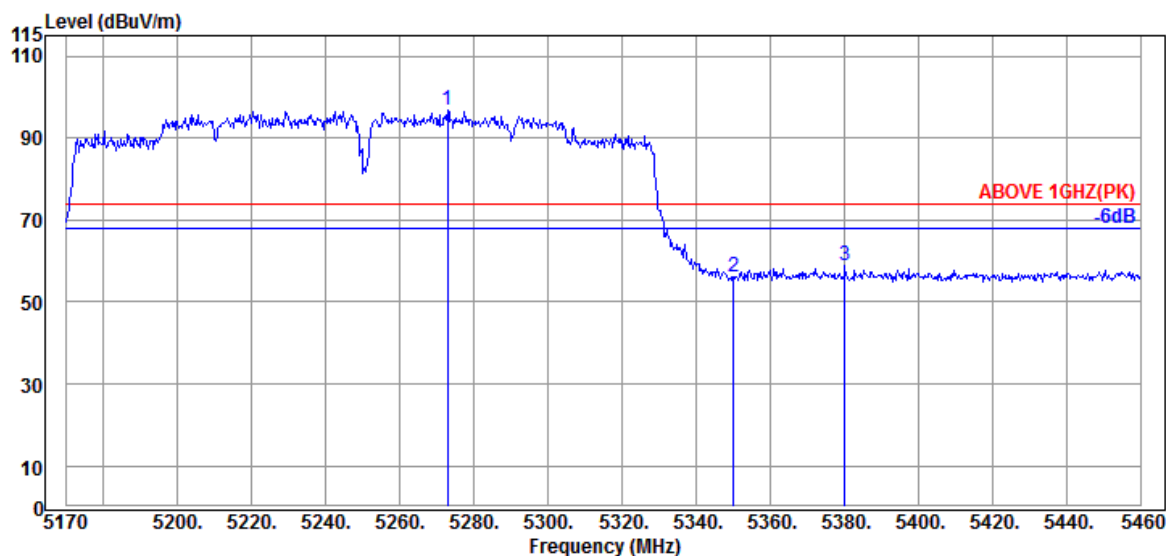

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.950	34.43	10.79	34.30	86.09	97.01	---	---	Peak
5350.090	34.60	10.83	34.27	44.97	56.13	74.00	17.87	Peak
5380.250	34.67	10.85	34.27	47.48	58.73	74.00	15.27	Peak

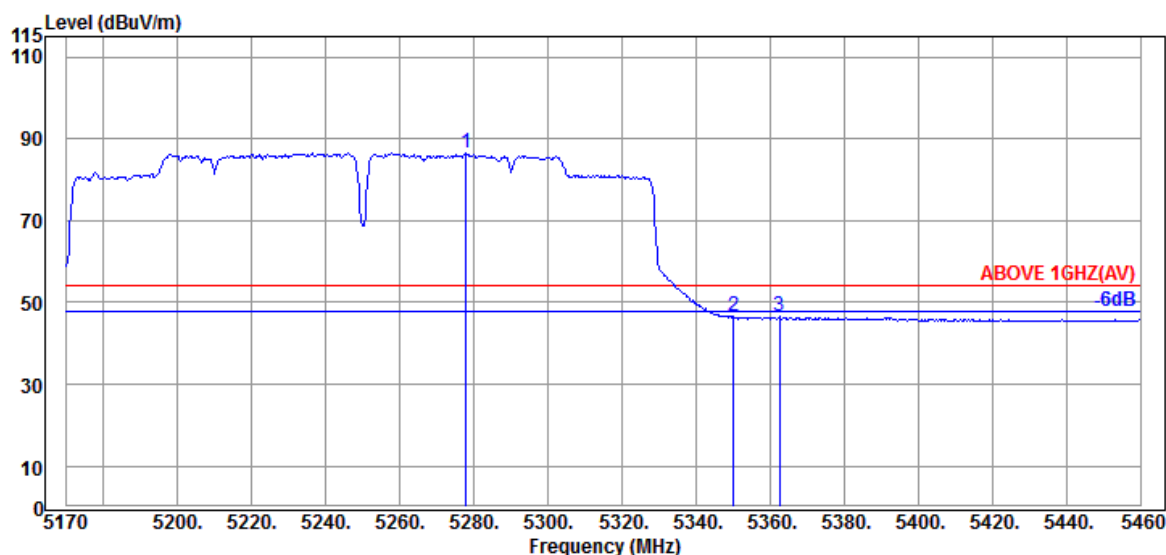

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.880	34.47	10.79	34.30	75.74	86.70	---	---	Average
5350.090	34.60	10.83	34.27	35.35	46.51	54.00	7.49	Average
5362.560	34.63	10.85	34.27	35.23	46.44	54.00	7.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

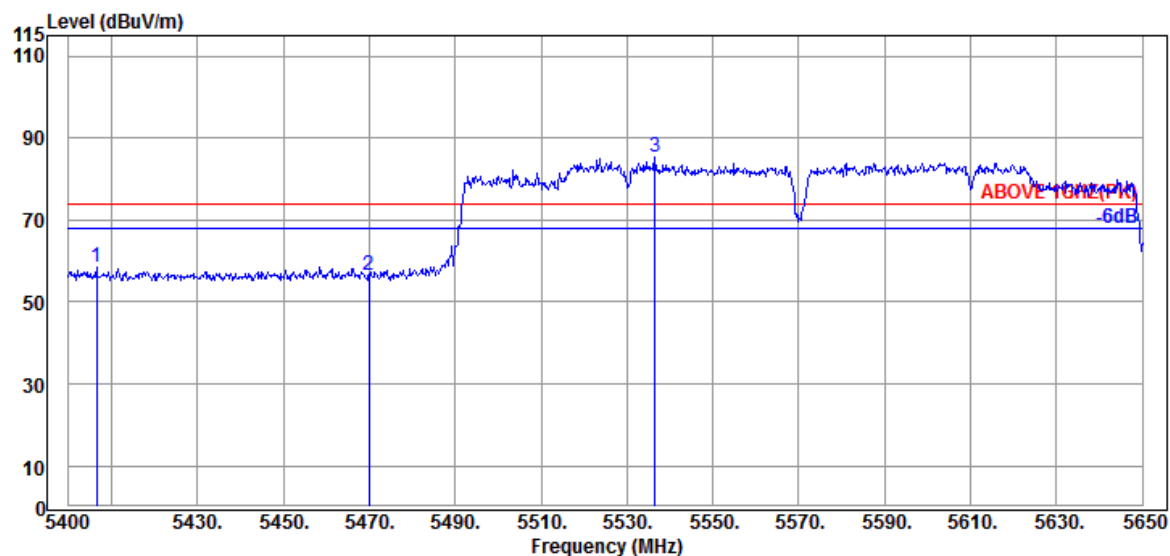

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5406.500	34.65	10.87	34.26	47.26	58.52	74.00	15.48	Peak
5470.000	34.47	10.91	34.24	45.38	56.52	74.00	17.48	Peak
@ 5536.500	34.33	10.95	34.25	74.37	85.40	---	---	Peak

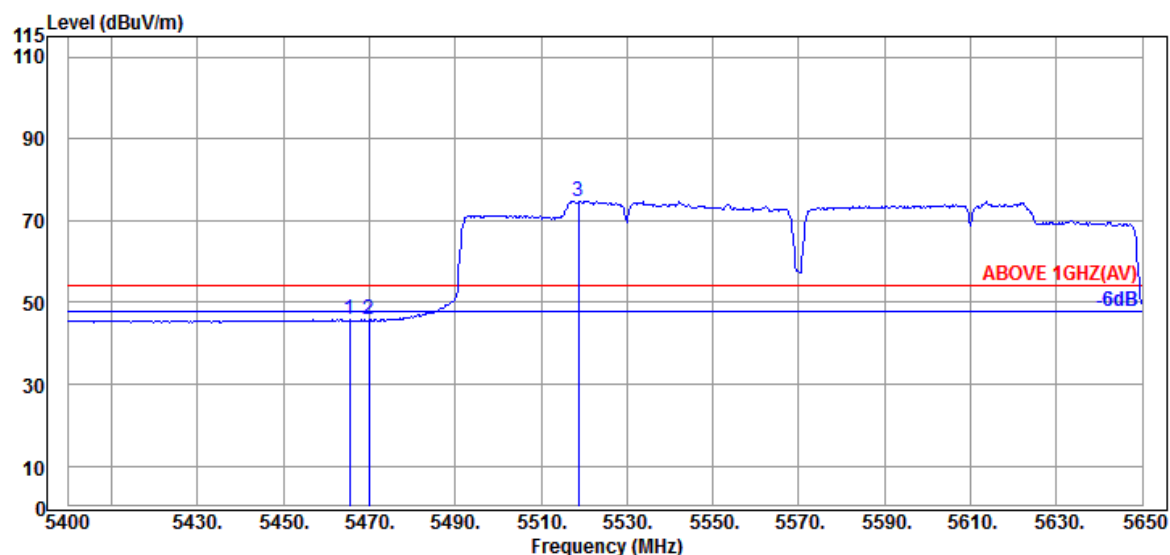

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.47	10.91	34.24	34.80	45.94	54.00	8.06	Average
5470.000	34.47	10.91	34.24	34.52	45.66	54.00	8.34	Average
@ 5518.750	34.37	10.93	34.24	63.73	74.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

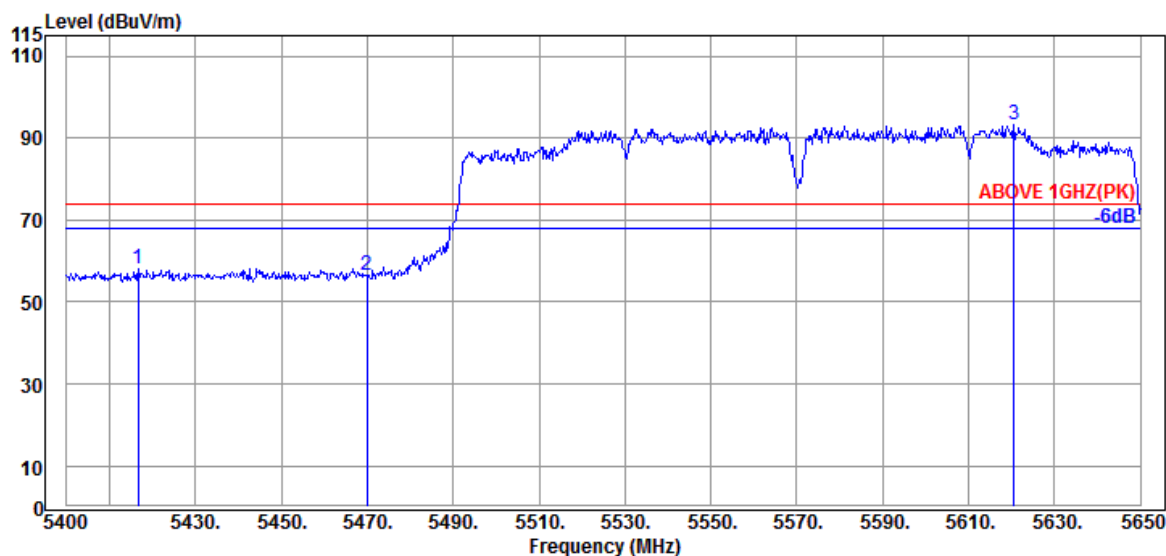

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.750	34.60	10.87	34.26	47.05	58.26	74.00	15.74	Peak
5470.000	34.47	10.91	34.24	45.30	56.44	74.00	17.56	Peak
@ 5620.500	34.40	10.99	34.28	82.28	93.39	---	---	Peak

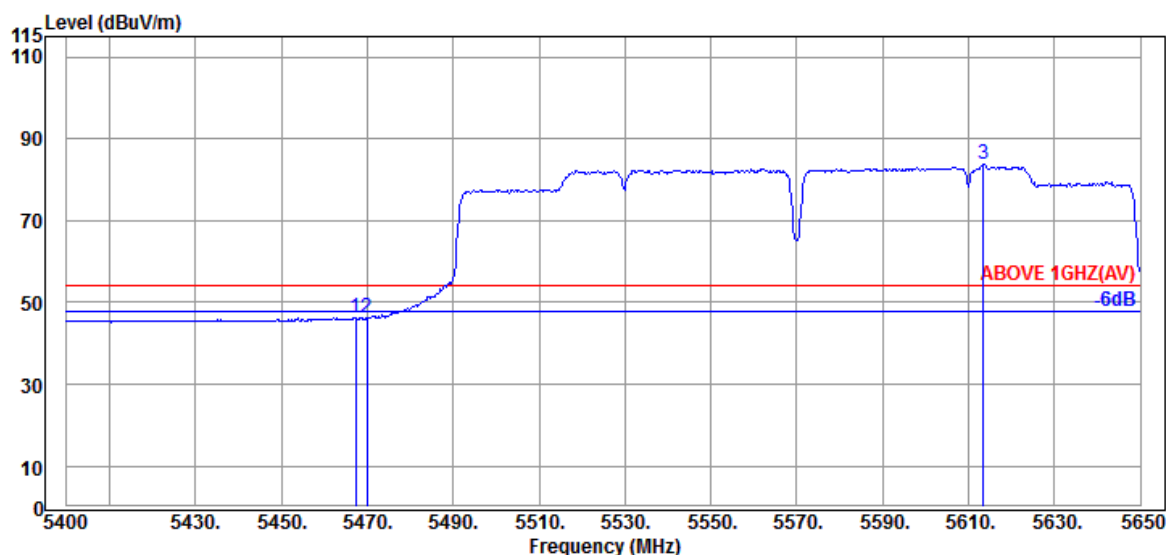

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.47	10.91	34.24	35.19	46.33	54.00	7.67	Average
5470.000	34.47	10.91	34.24	35.05	46.19	54.00	7.81	Average
@ 5613.500	34.40	10.99	34.28	72.52	83.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

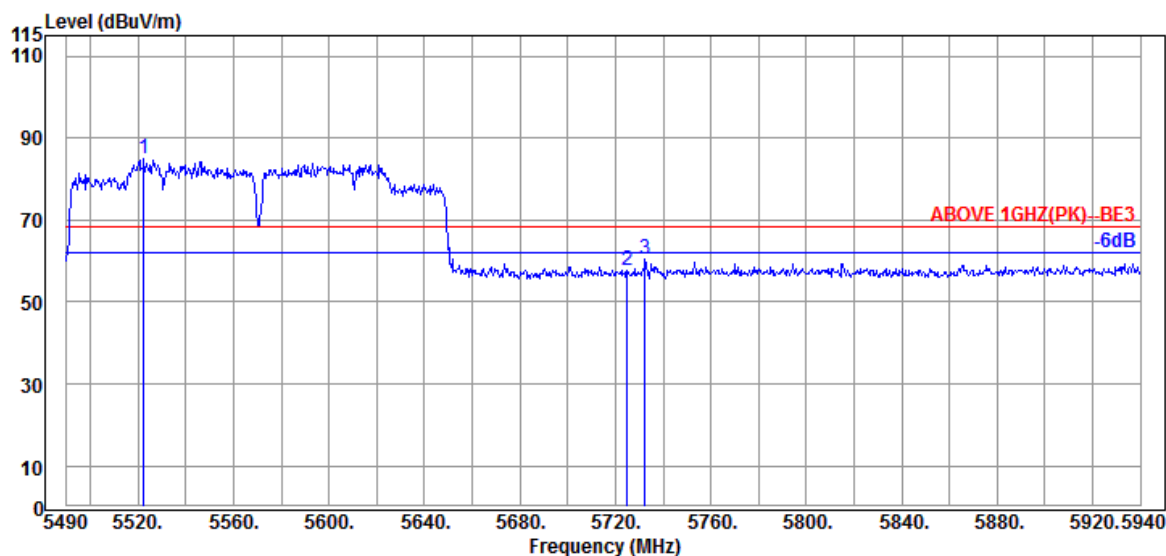

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5522.400	34.37	10.93	34.24	73.75	84.81	---	---	Peak
	5724.900	34.67	11.05	34.32	46.27	57.67	68.20	10.53	Peak
	5732.550	34.67	11.05	34.33	49.13	60.52	68.20	7.68	Peak

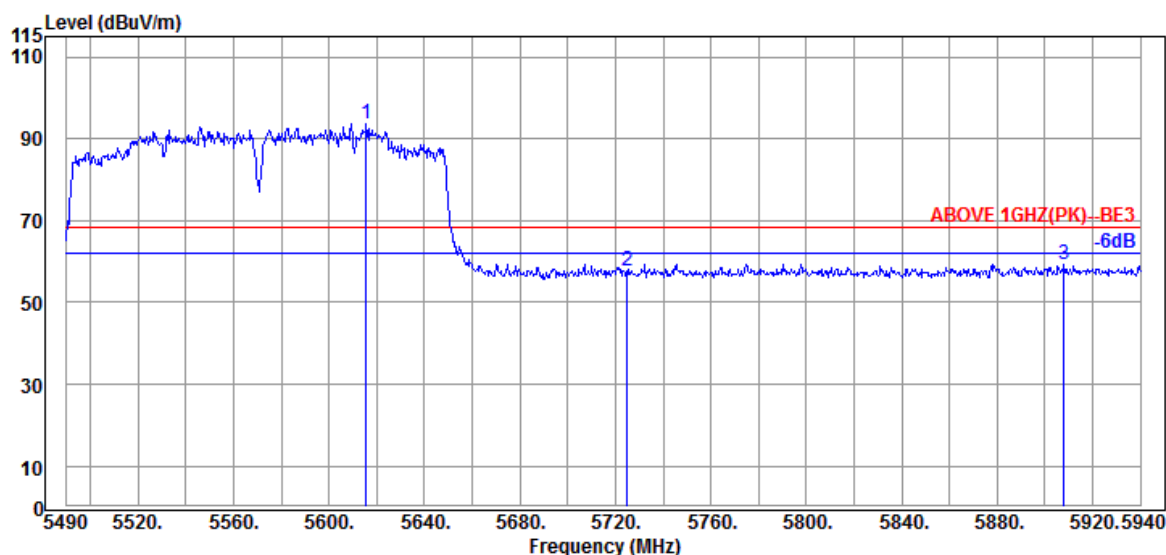

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5615.550	34.40	10.99	34.28	82.50	93.61	---	---	Peak
	5724.900	34.67	11.05	34.32	46.21	57.61	68.20	10.59	Peak
	5908.050	35.37	11.14	34.40	47.19	59.30	68.20	8.90	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

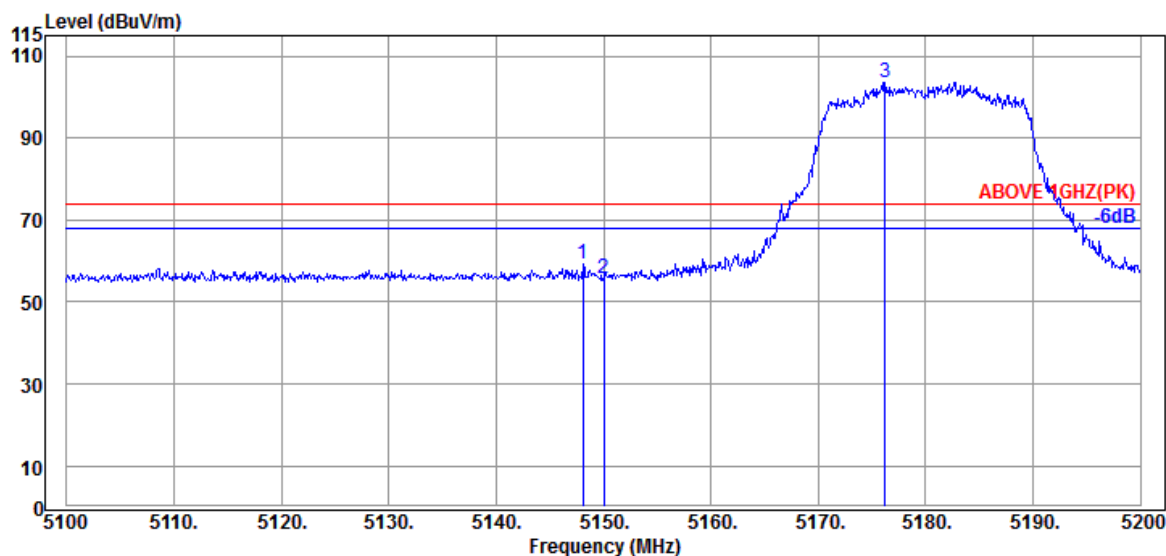

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.100	34.20	10.70	34.35	48.68	59.23	74.00	14.77	Peak
5150.000	34.20	10.70	34.35	45.23	55.78	74.00	18.22	Peak
@ 5176.200	34.20	10.72	34.34	93.10	103.68	---	---	Peak

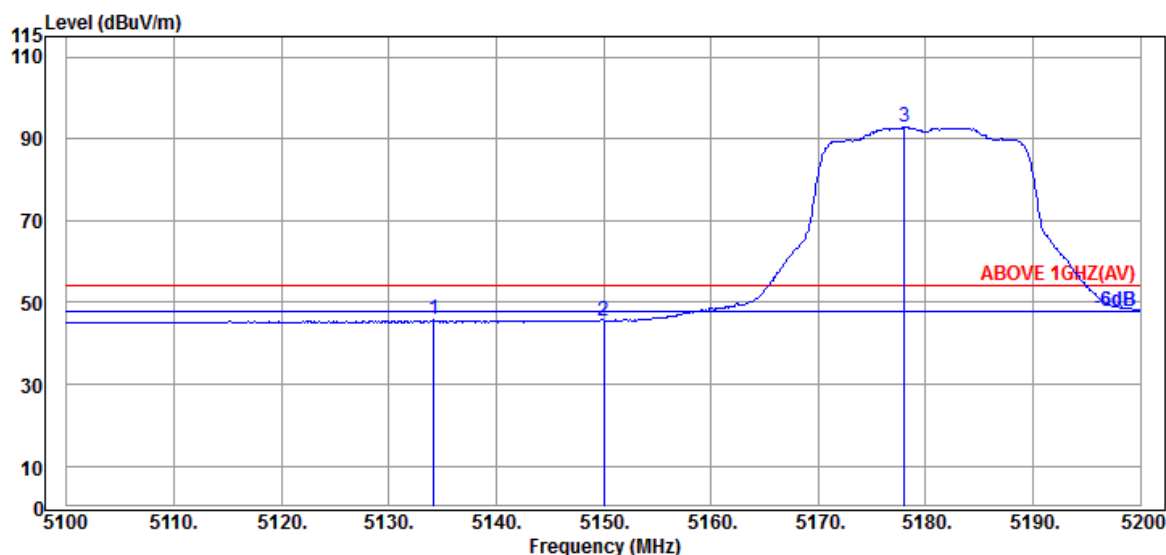

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5134.200	34.17	10.70	34.36	35.25	45.76	54.00	8.24	Average
5150.000	34.20	10.70	34.35	34.83	45.38	54.00	8.62	Average
@ 5178.000	34.20	10.72	34.34	82.36	92.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

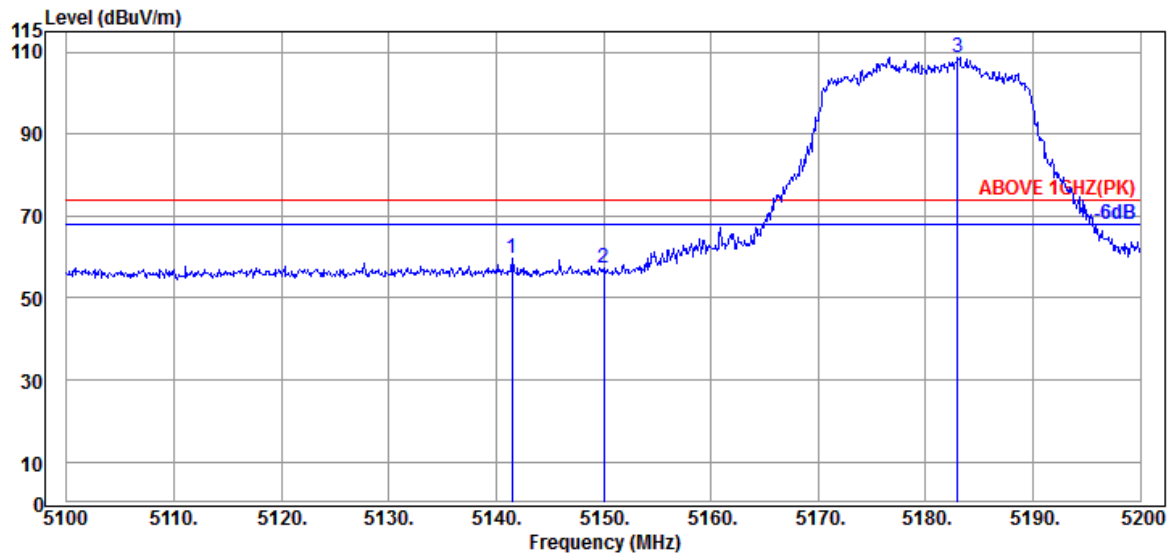

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5141.500	34.17	10.70	34.36	49.11	59.62	74.00	14.38	Peak
5150.000	34.20	10.70	34.35	46.58	57.13	74.00	16.87	Peak
@ 5183.000	34.20	10.72	34.34	98.29	108.87	---	---	Peak

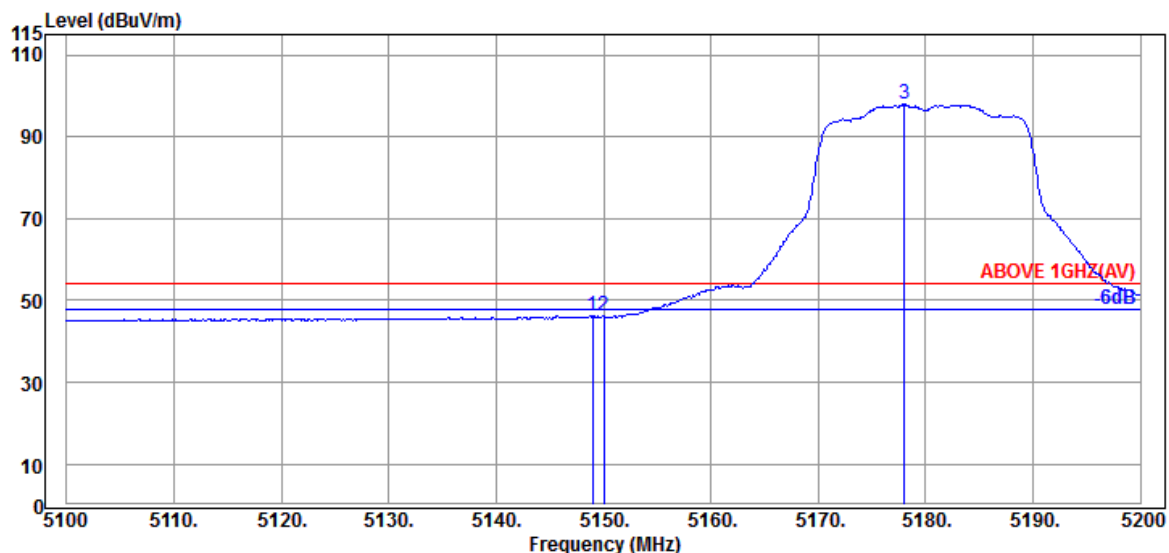

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.000	34.20	10.70	34.35	35.68	46.23	54.00	7.77	Average
5150.000	34.20	10.70	34.35	35.65	46.20	54.00	7.80	Average
@ 5178.000	34.20	10.72	34.34	87.30	97.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

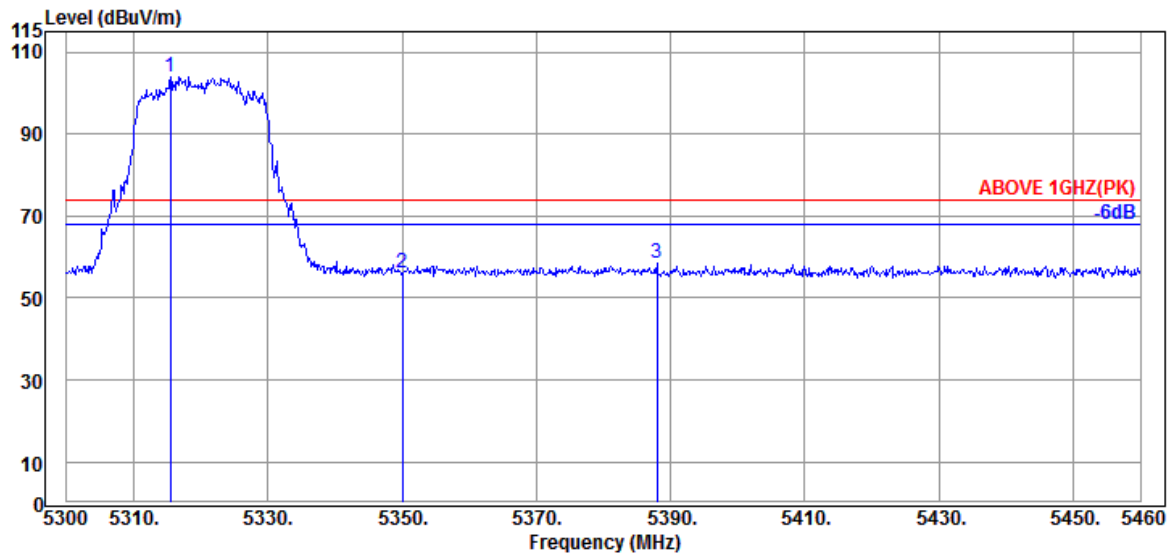

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.520	34.53	10.81	34.29	93.01	104.06	---	---	Peak
5350.080	34.60	10.83	34.27	44.88	56.04	74.00	17.96	Peak
5388.000	34.70	10.85	34.27	47.30	58.58	74.00	15.42	Peak

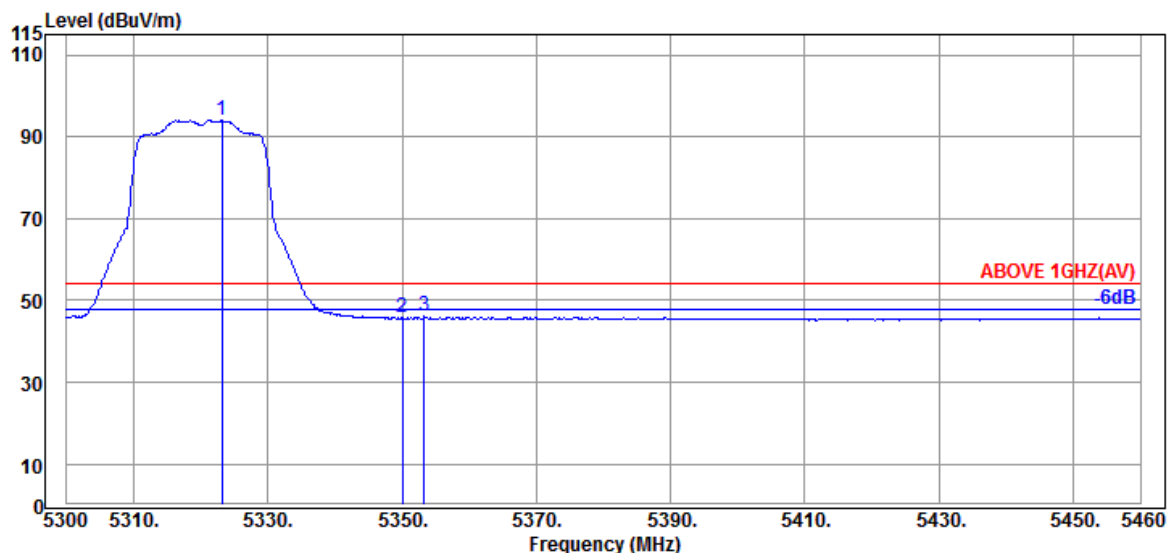

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	34.53	10.83	34.28	82.91	93.99	---	---	Average
5350.080	34.60	10.83	34.27	34.49	45.65	54.00	8.35	Average
5353.280	34.60	10.83	34.27	34.92	46.08	54.00	7.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

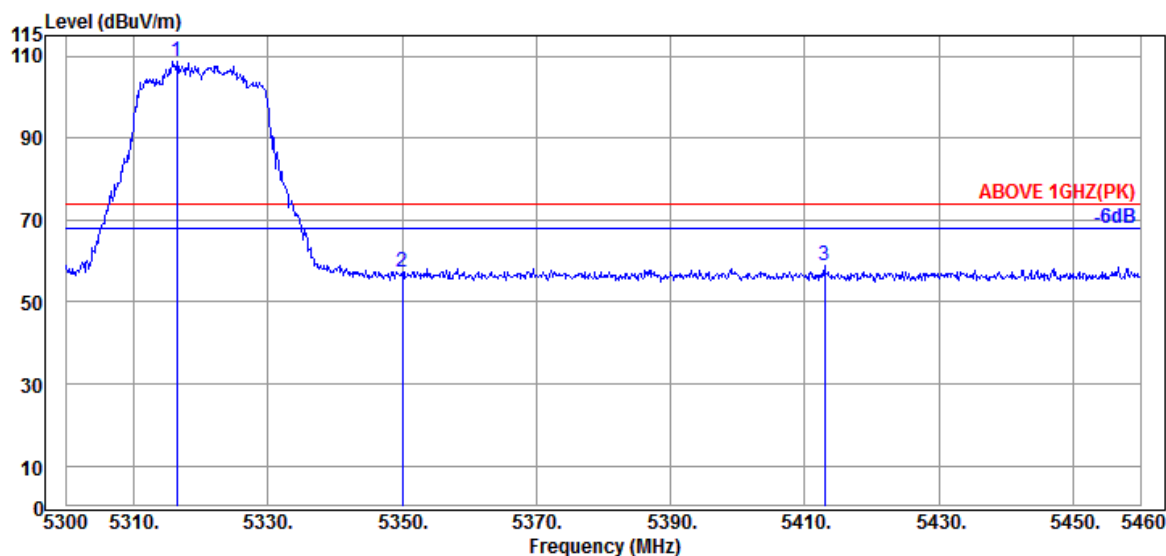

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.53	10.81	34.29	97.82	108.87	---	---	Peak
5350.080	34.60	10.83	34.27	46.19	57.35	74.00	16.65	Peak
5412.960	34.65	10.87	34.26	47.44	58.70	74.00	15.30	Peak

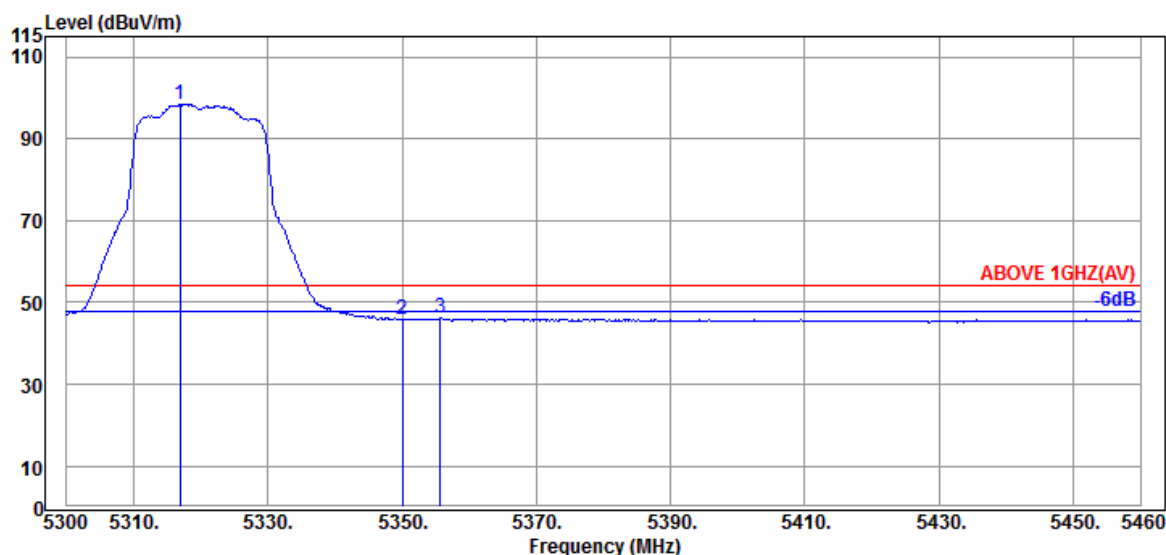

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.960	34.53	10.81	34.29	87.35	98.40	---	---	Average
5350.080	34.60	10.83	34.27	34.66	45.82	54.00	8.18	Average
5355.680	34.63	10.85	34.27	35.06	46.27	54.00	7.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

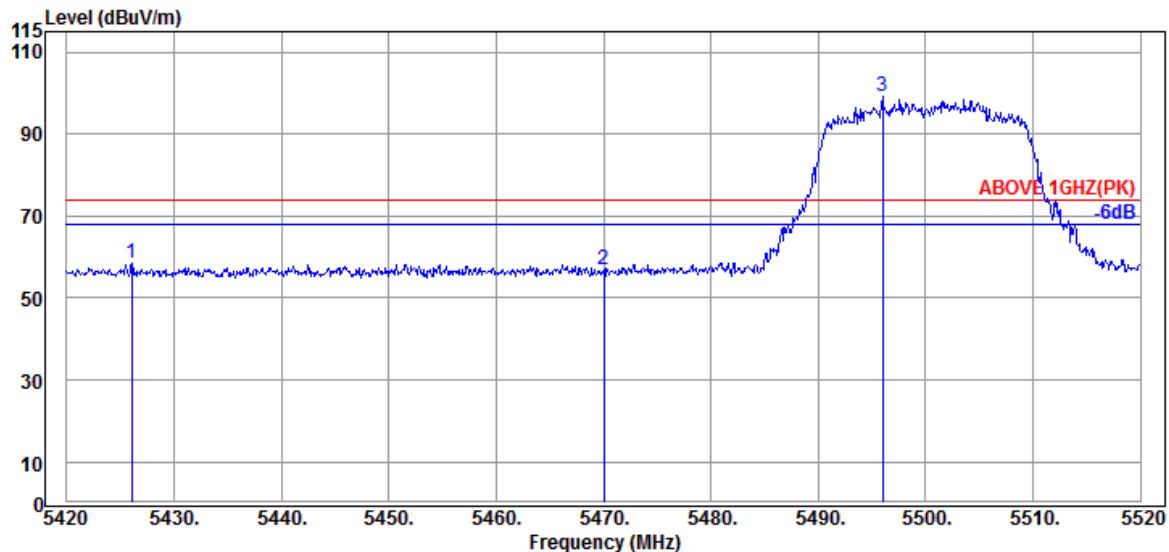

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.100	34.60	10.89	34.25	47.28	58.52	74.00	15.48	Peak
5470.000	34.47	10.91	34.24	45.86	57.00	74.00	17.00	Peak
@ 5496.000	34.40	10.93	34.23	88.02	99.12	---	---	Peak

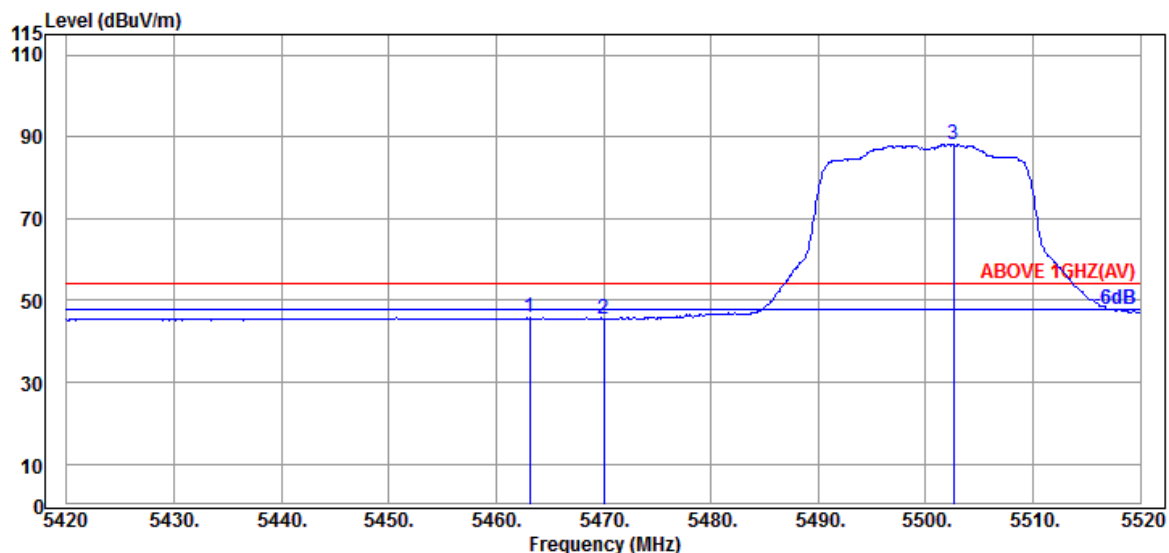

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.50	10.91	34.24	34.57	45.74	54.00	8.26	Average
5470.000	34.47	10.91	34.24	34.33	45.47	54.00	8.53	Average
@ 5502.600	34.40	10.93	34.24	77.03	88.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

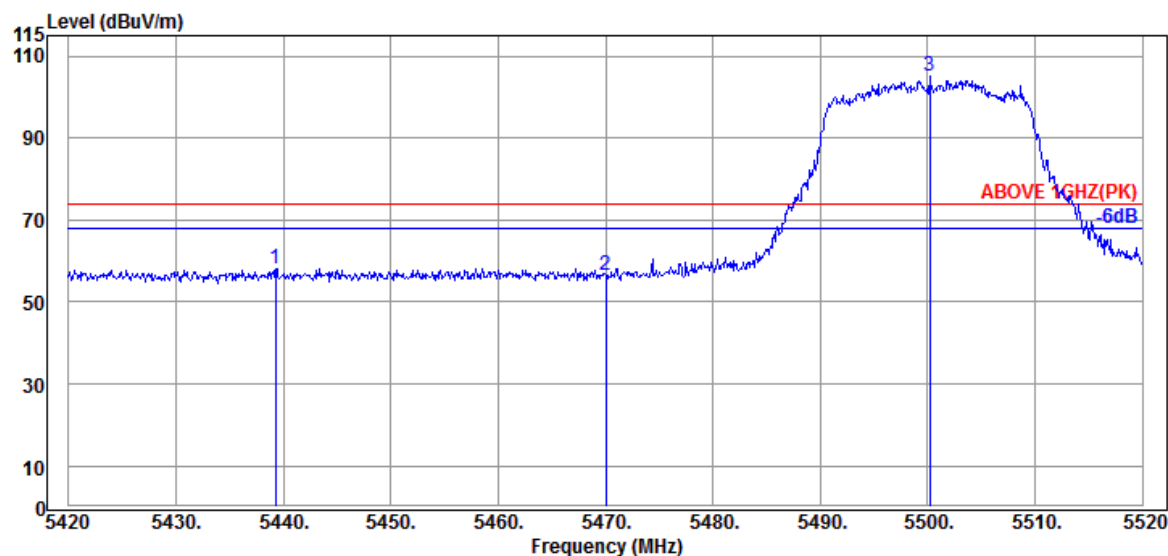

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.300	34.55	10.89	34.25	47.03	58.22	74.00	15.78	Peak
5470.000	34.47	10.91	34.24	45.25	56.39	74.00	17.61	Peak
@ 5500.200	34.40	10.93	34.23	94.09	105.19	---	---	Peak

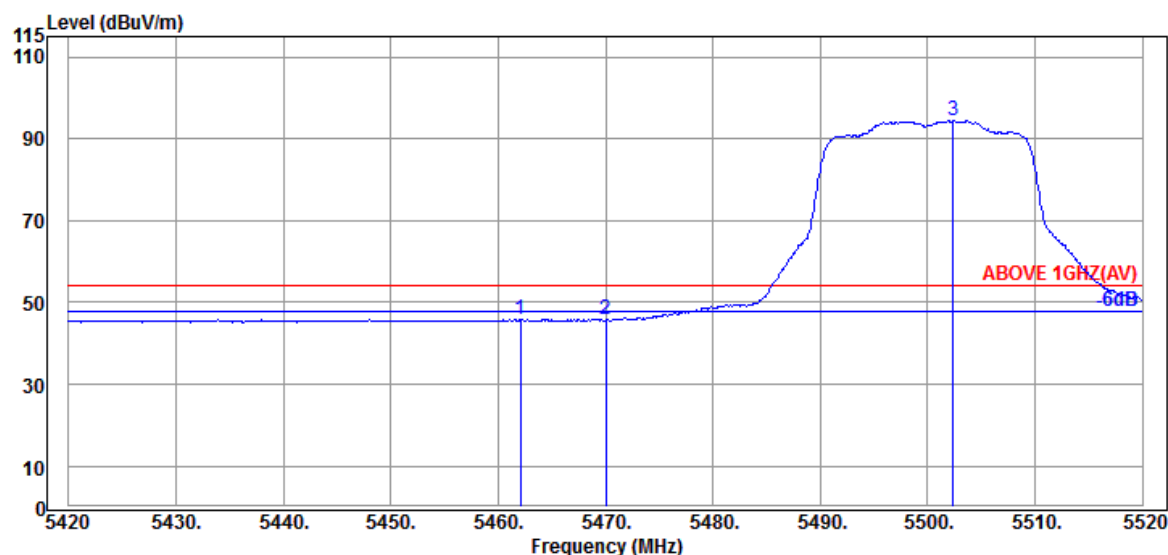

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.100	34.50	10.91	34.24	34.73	45.90	54.00	8.10	Average
5470.000	34.47	10.91	34.24	34.58	45.72	54.00	8.28	Average
@ 5502.400	34.40	10.93	34.24	83.26	94.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

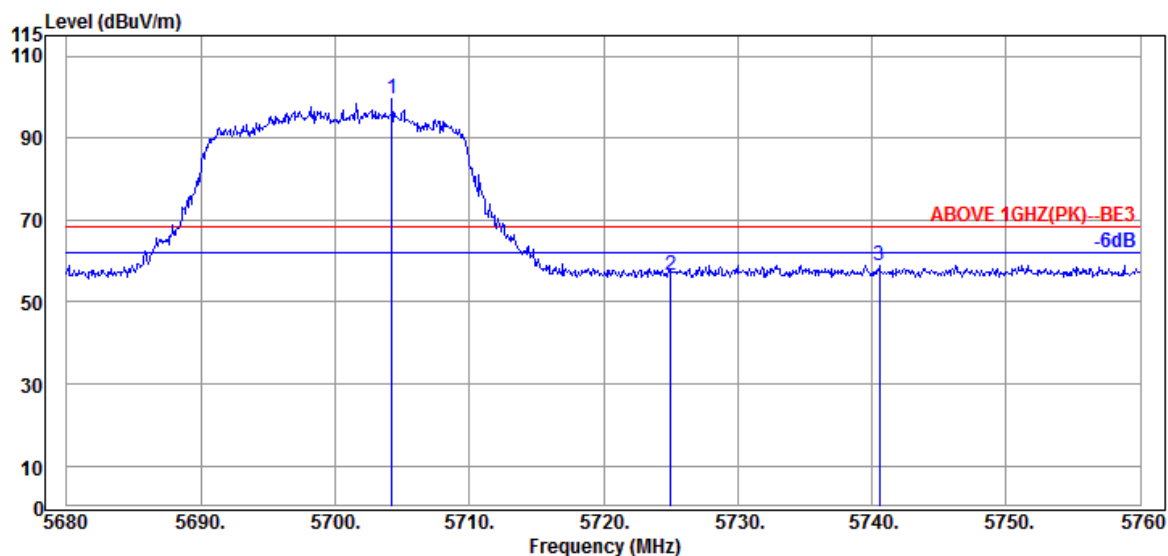

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5704.240	34.40	11.03	34.31	88.63	99.75	---	---	Peak
	5725.040	34.67	11.05	34.32	45.11	56.51	68.20	11.69	Peak
	5740.560	34.80	11.05	34.33	47.52	59.04	68.20	9.16	Peak

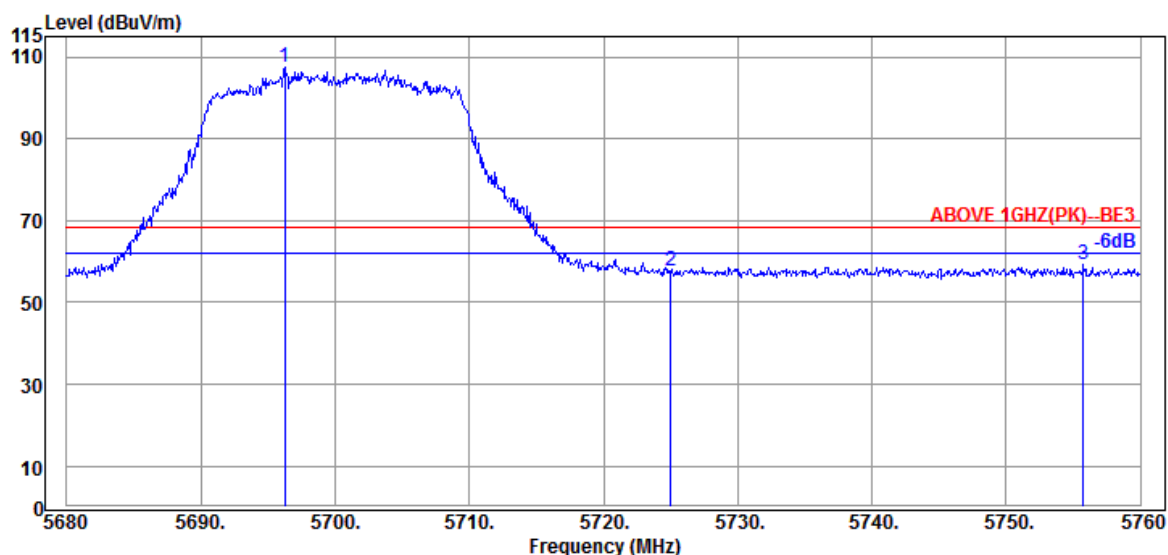

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5696.240	34.40	11.03	34.31	96.31	107.43	---	---	Peak
	5725.040	34.67	11.05	34.32	46.27	57.67	68.20	10.53	Peak
	5755.760	34.87	11.06	34.35	47.76	59.34	68.20	8.86	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

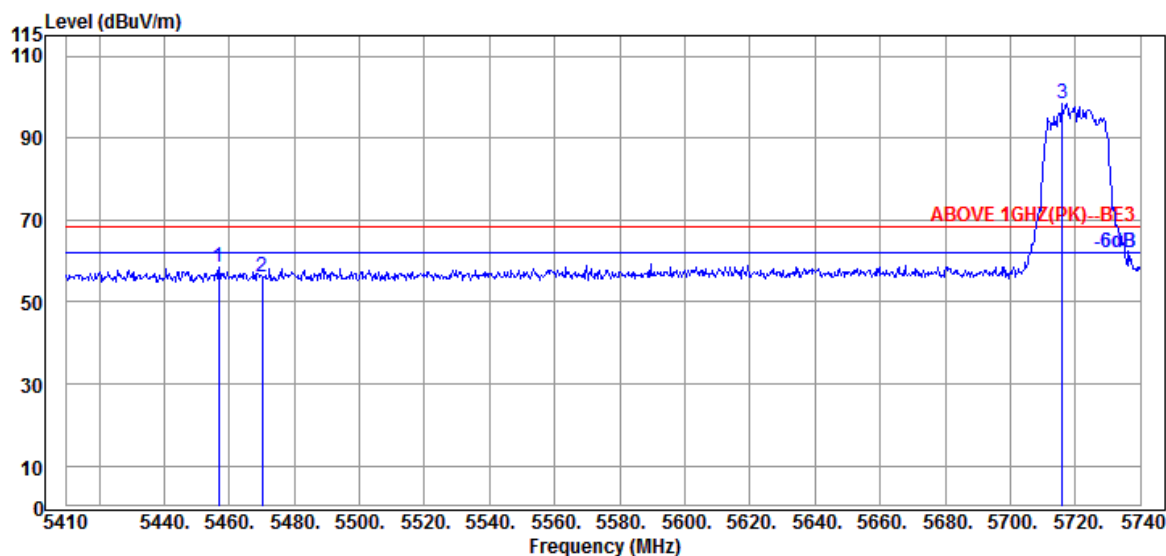

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.860	34.50	10.89	34.24	47.48	58.63	68.20	9.57	Peak
5470.060	34.47	10.91	34.24	44.96	56.10	68.20	12.10	Peak
@ 5715.910	34.53	11.05	34.32	87.33	98.59	---	---	Peak

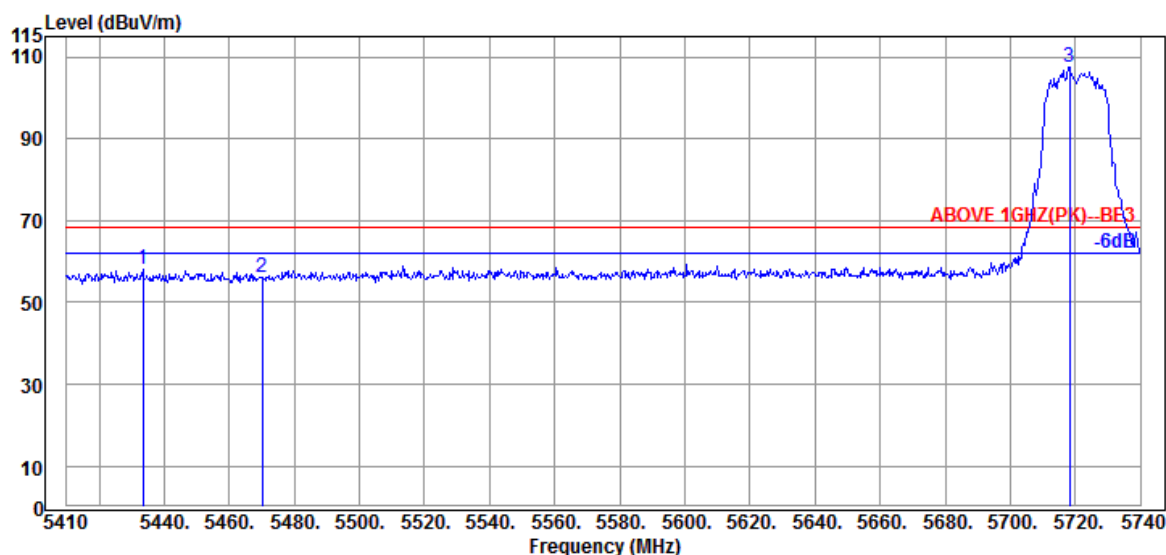

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.430	34.55	10.89	34.25	46.81	58.00	68.20	10.20	Peak
5470.060	34.47	10.91	34.24	44.93	56.07	68.20	12.13	Peak
@ 5718.220	34.53	11.05	34.32	96.21	107.47	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

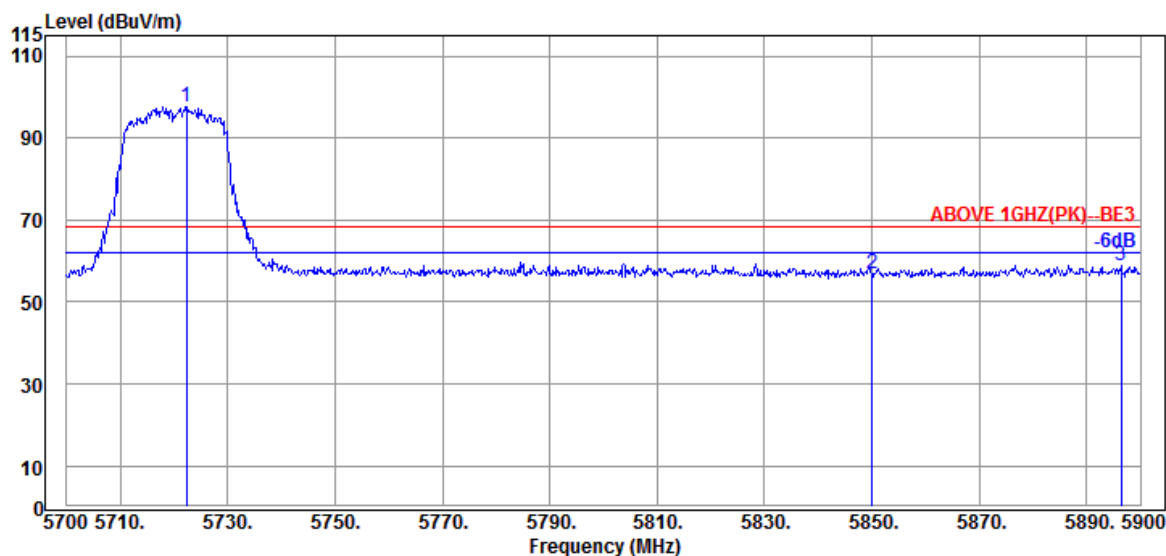

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.400	34.67	11.05	34.32	86.32	97.72	---	---	Peak
	5850.000	35.10	11.10	34.38	45.24	57.06	68.20	11.14	Peak
	5896.400	35.40	11.14	34.40	46.73	58.87	68.20	9.33	Peak

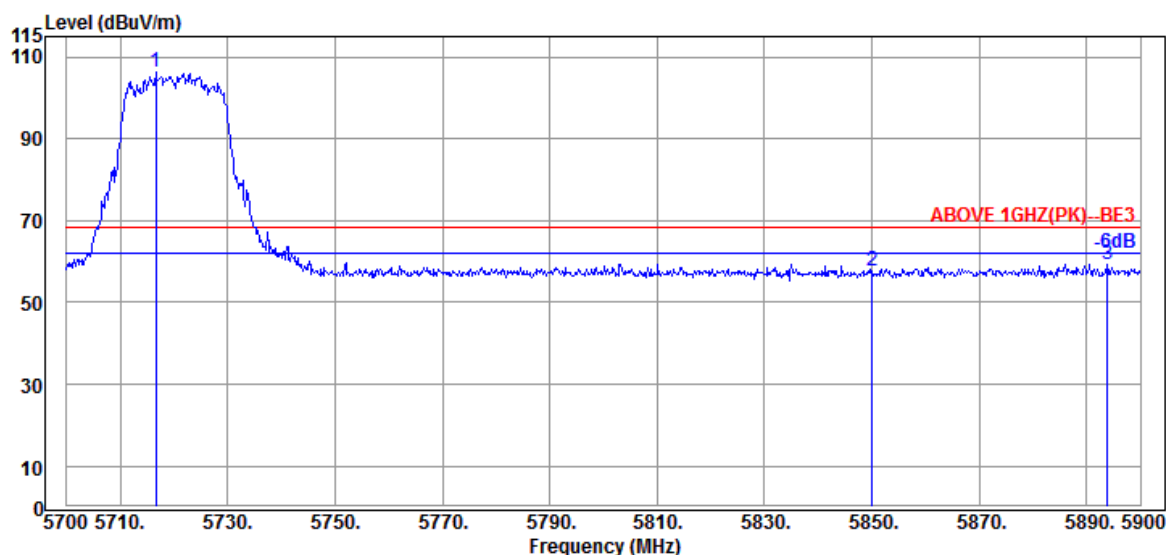

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5716.600	34.53	11.05	34.32	95.14	106.40	---	---	Peak
	5850.000	35.10	11.10	34.38	45.87	57.69	68.20	10.51	Peak
	5893.800	35.40	11.12	34.40	47.32	59.44	68.20	8.76	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

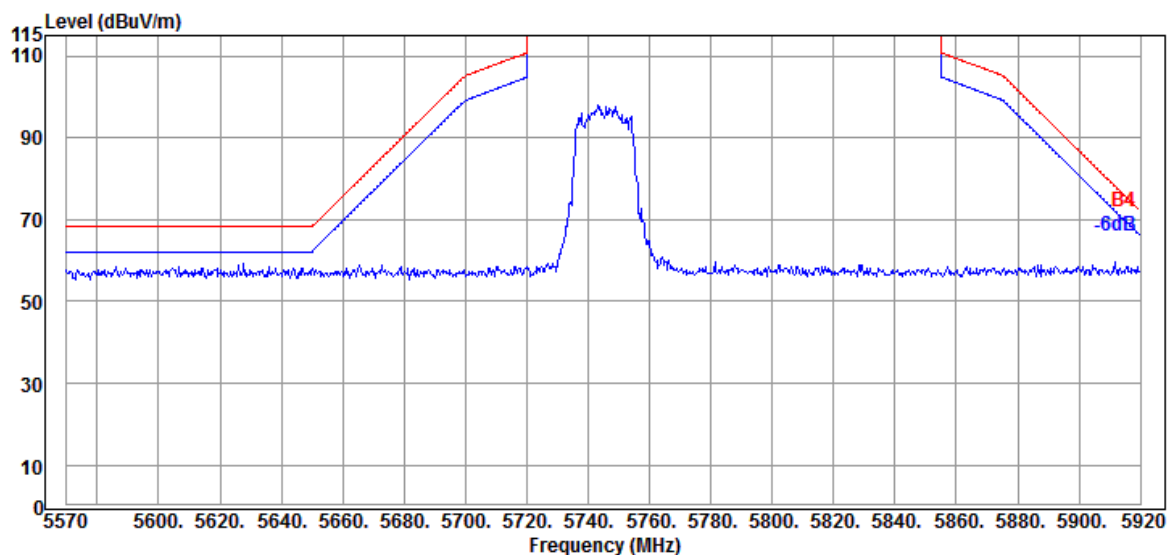

Antenna at Vertical Polarization

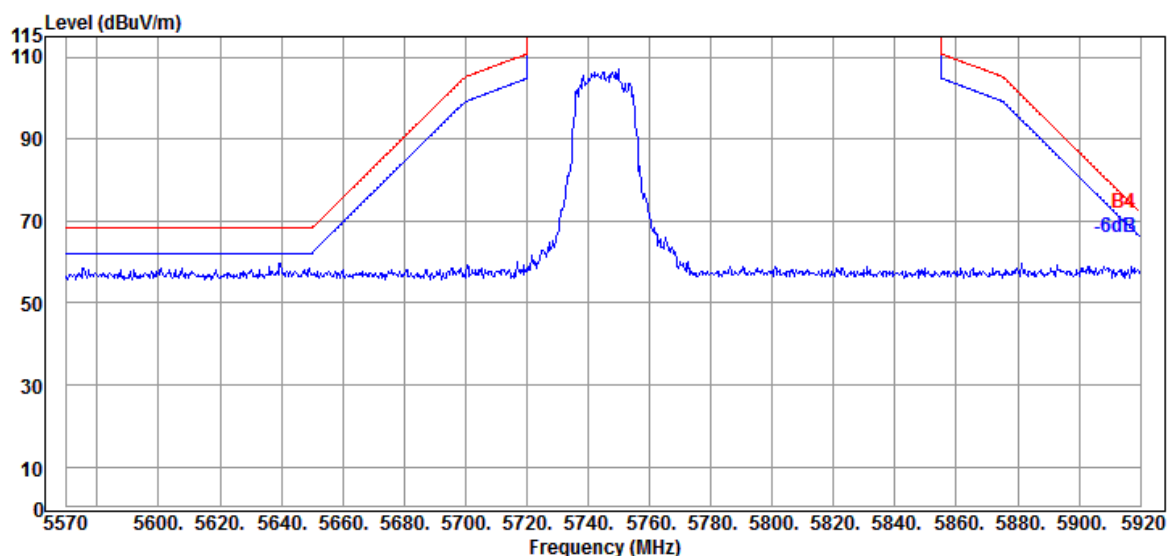


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

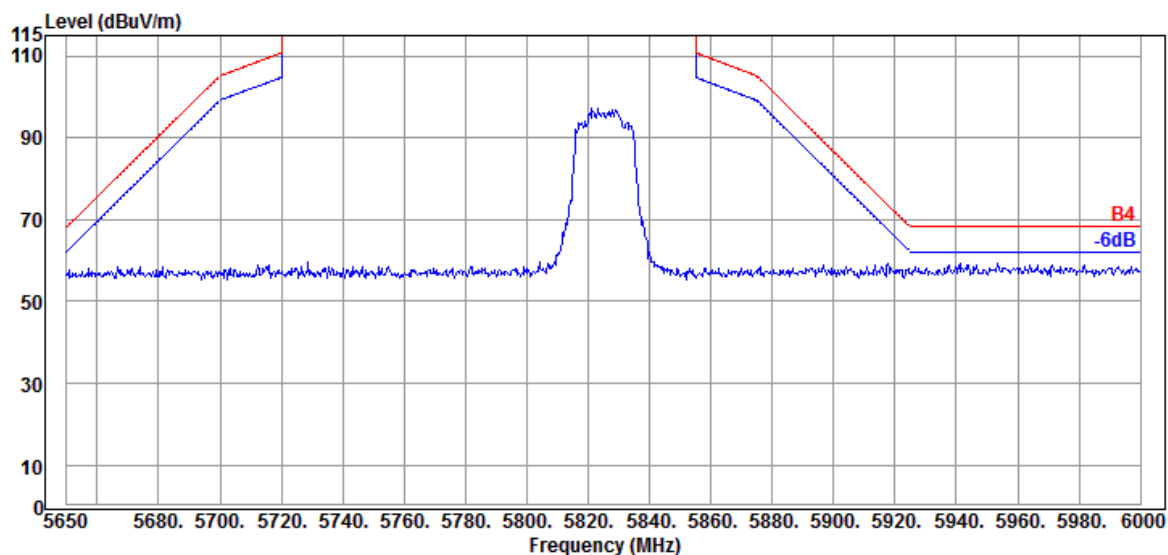

Antenna at Vertical Polarization

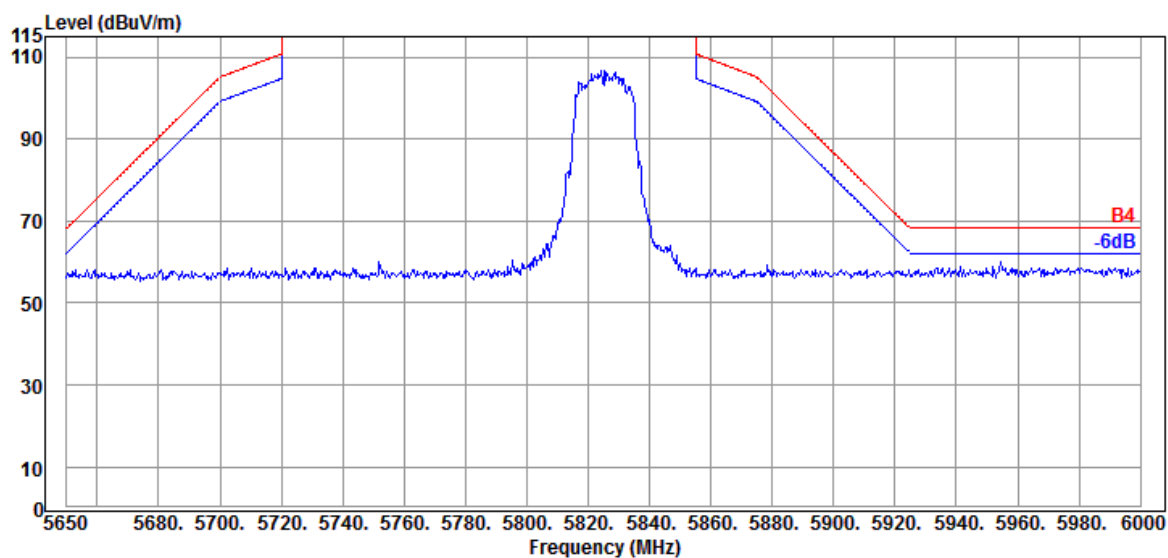

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

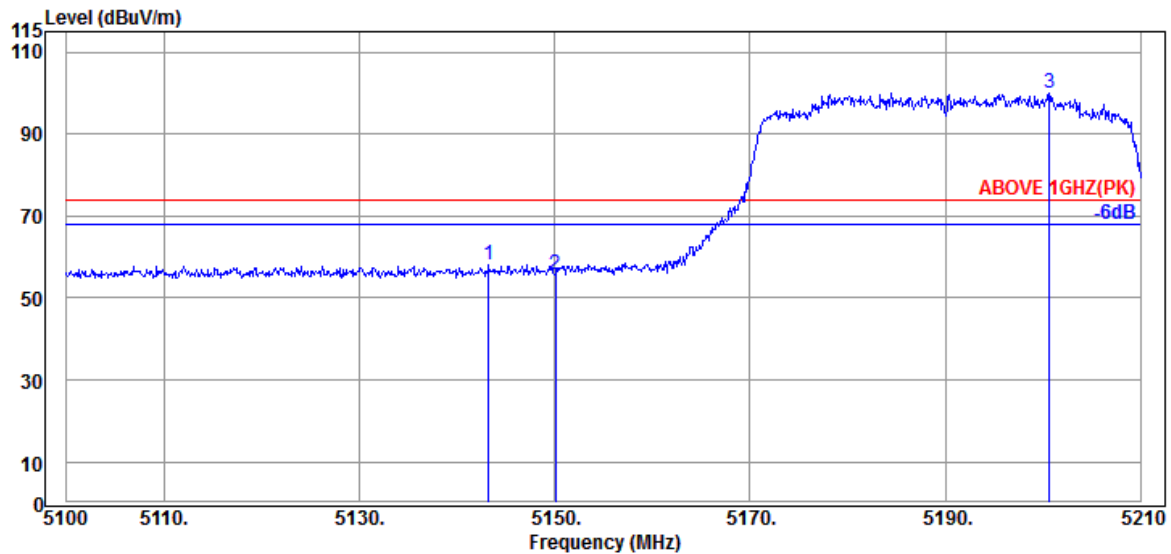

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5143.230	34.20	10.70	34.36	47.56	58.10	74.00	15.90	Peak
5150.050	34.20	10.70	34.35	45.30	55.85	74.00	18.15	Peak
@ 5200.650	34.20	10.74	34.33	89.39	100.00	---	---	Peak

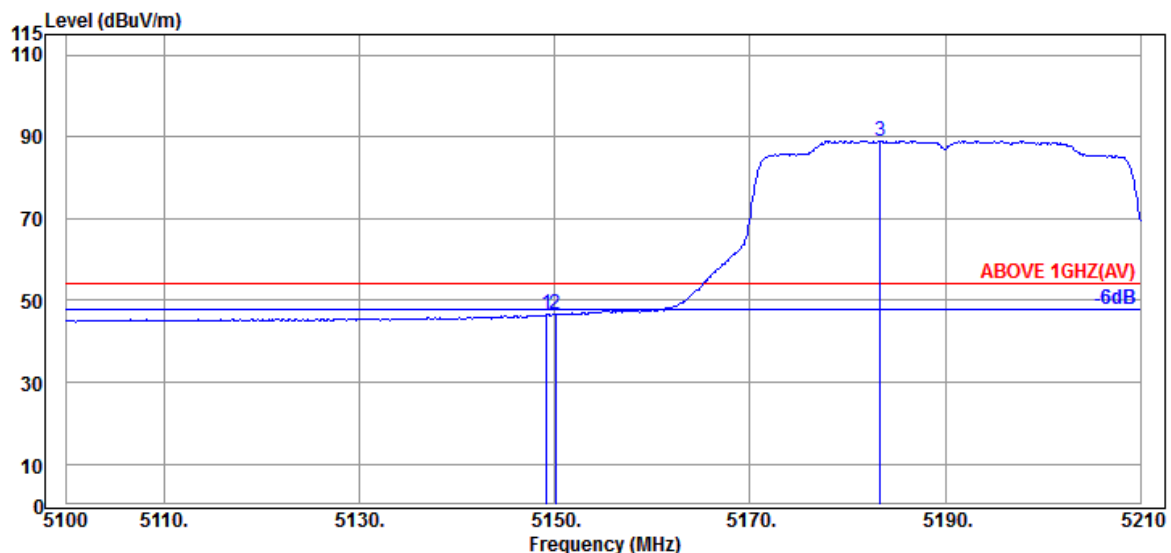

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.170	34.20	10.70	34.35	36.08	46.63	54.00	7.37	Average
5150.050	34.20	10.70	34.35	36.27	46.82	54.00	7.18	Average
@ 5183.380	34.20	10.72	34.34	78.48	89.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

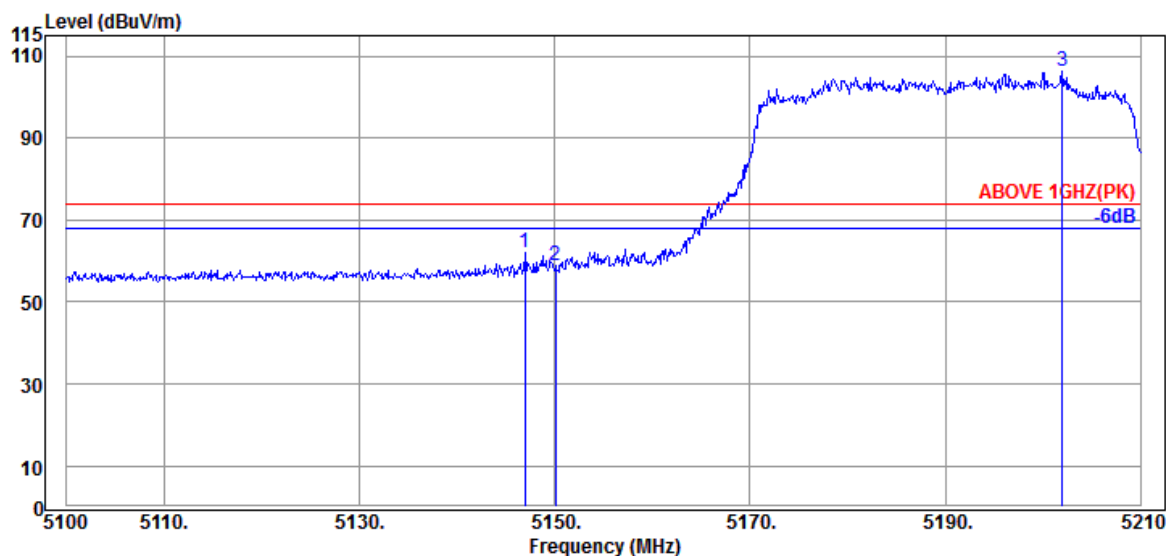

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.970	34.20	10.70	34.35	51.31	61.86	74.00	12.14	Peak
5150.050	34.20	10.70	34.35	48.25	58.80	74.00	15.20	Peak
@ 5201.970	34.25	10.74	34.33	95.78	106.44	---	---	Peak

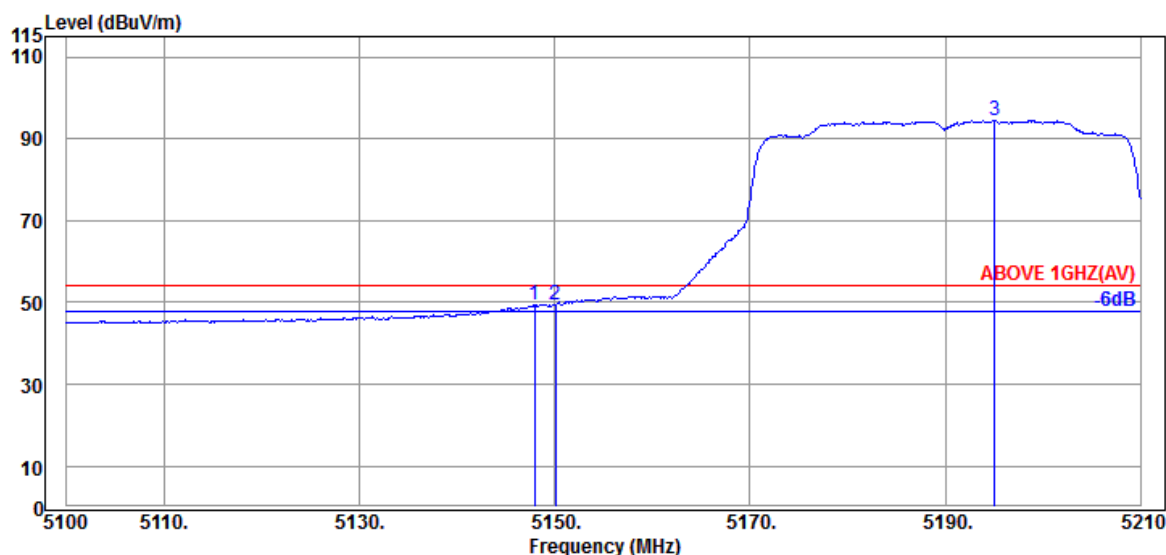

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.960	34.20	10.70	34.35	38.91	49.46	54.00	4.54	Average
5150.050	34.20	10.70	34.35	38.81	49.36	54.00	4.64	Average
@ 5195.040	34.20	10.74	34.33	83.92	94.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

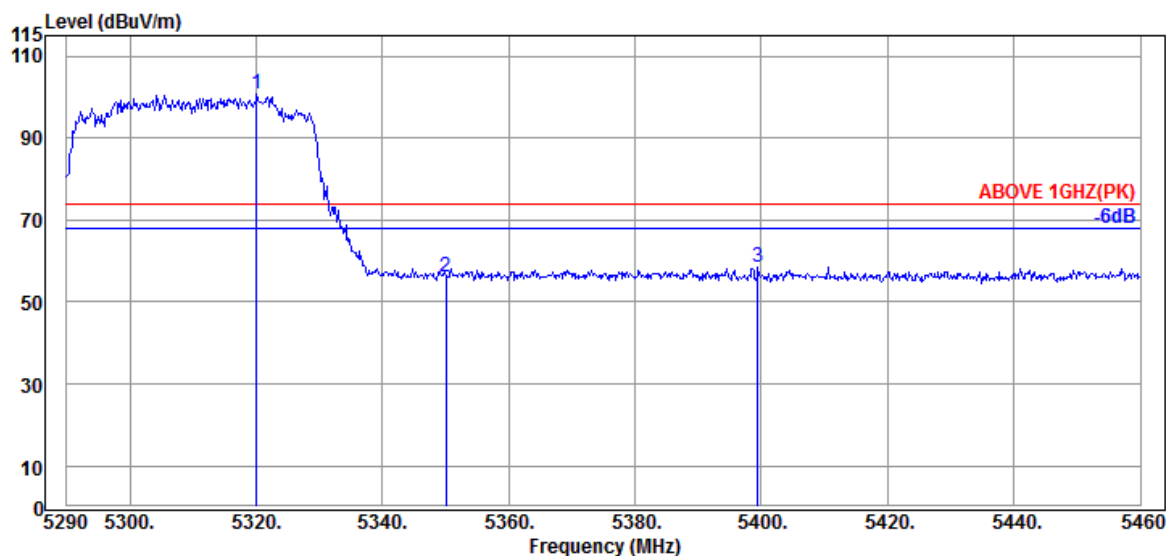

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5320.090	34.53	10.81	34.29	89.57	100.62	---	---	Peak
	5350.010	34.60	10.83	34.27	44.93	56.09	74.00	17.91	Peak
	5399.480	34.70	10.87	34.26	47.13	58.44	74.00	15.56	Peak

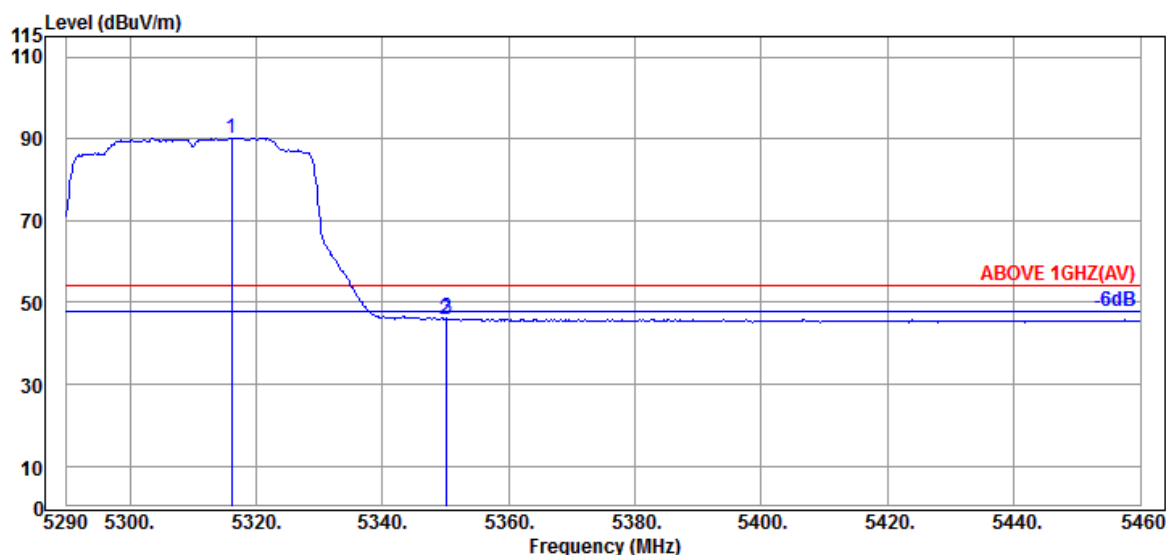

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.180	34.53	10.81	34.29	79.19	90.24	---	---	Average
	5350.010	34.60	10.83	34.27	34.85	46.01	54.00	7.99	Average
	5350.180	34.60	10.83	34.27	34.94	46.10	54.00	7.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

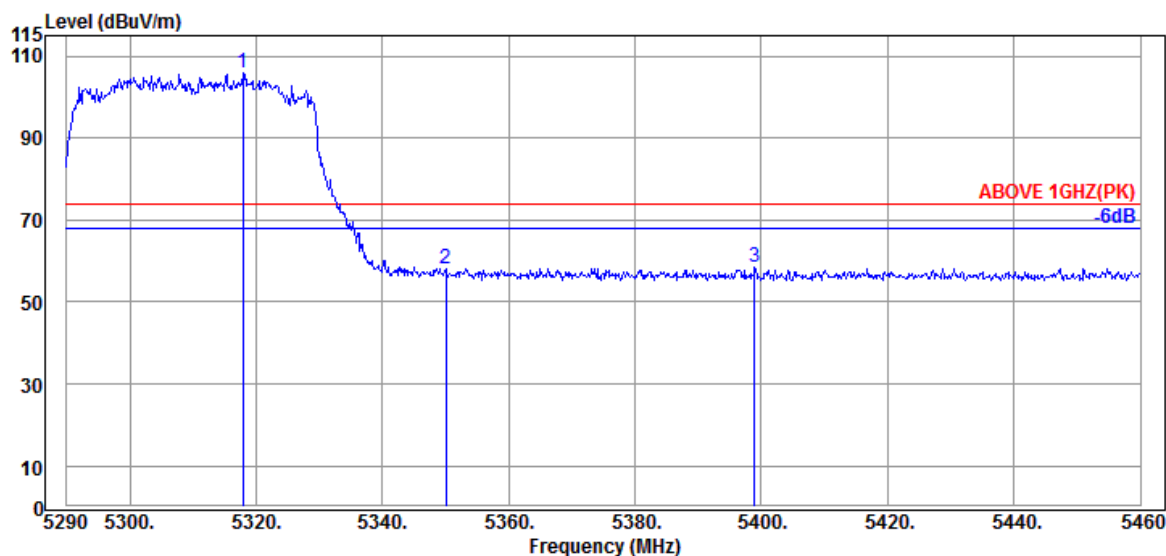

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.880	34.53	10.81	34.29	94.84	105.89	---	---	Peak
5350.010	34.60	10.83	34.27	46.87	58.03	74.00	15.97	Peak
5398.970	34.70	10.87	34.26	47.01	58.32	74.00	15.68	Peak

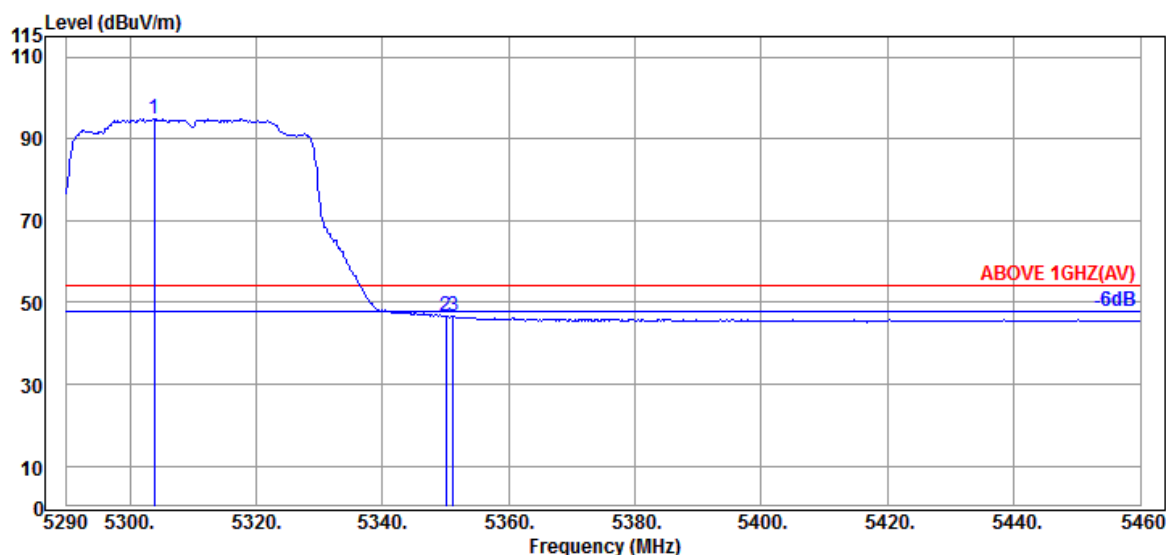

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.940	34.50	10.81	34.29	83.80	94.82	---	---	Average
5350.010	34.60	10.83	34.27	35.39	46.55	54.00	7.45	Average
5351.200	34.60	10.83	34.27	35.43	46.59	54.00	7.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

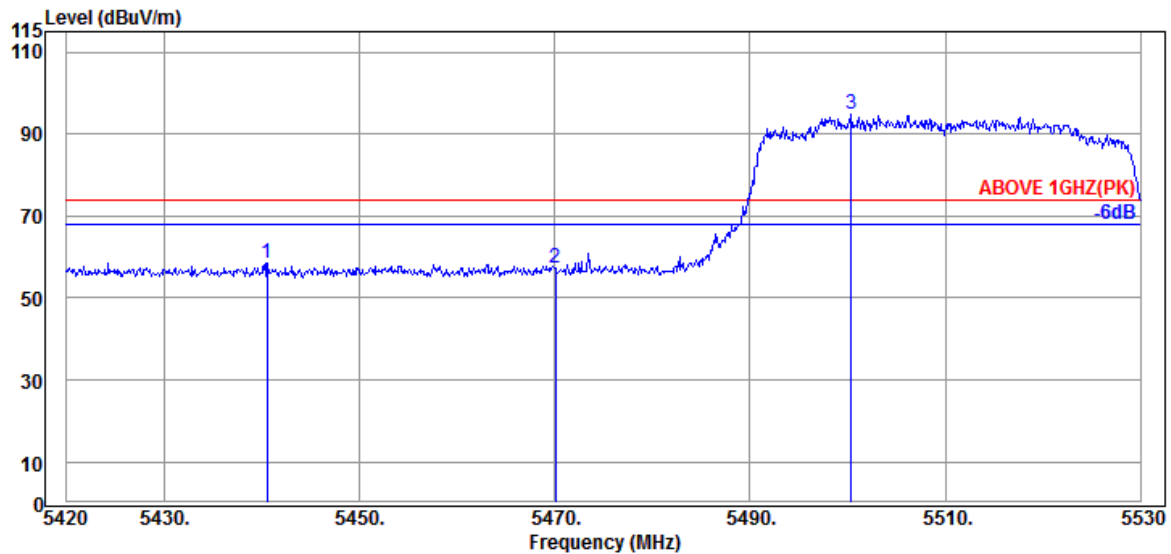

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.570	34.55	10.89	34.25	47.36	58.55	74.00	15.45	Peak
5470.050	34.47	10.91	34.24	46.02	57.16	74.00	16.84	Peak
@ 5500.410	34.40	10.93	34.23	83.85	94.95	---	---	Peak

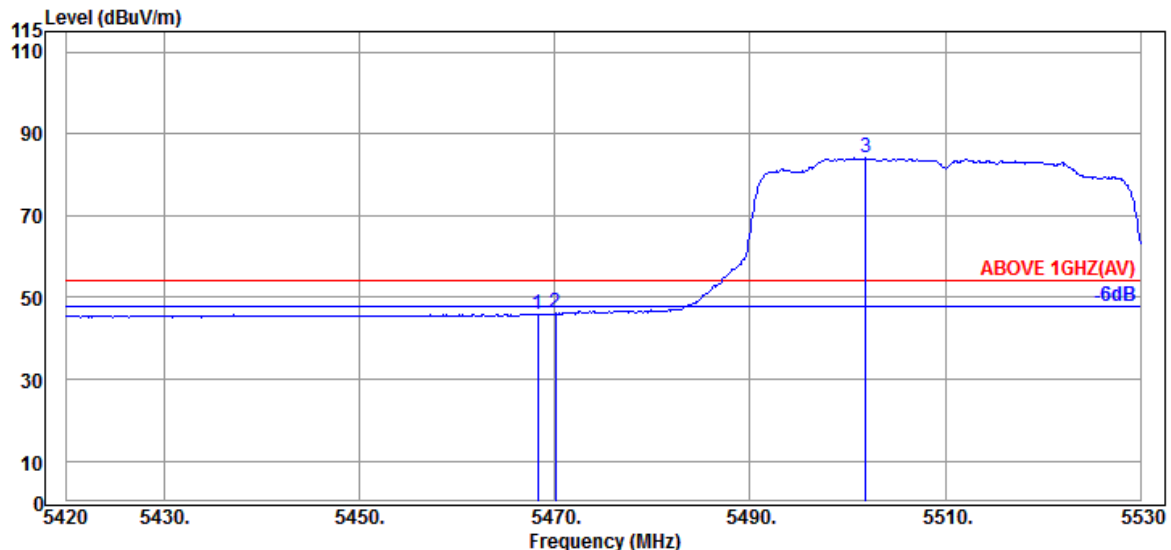

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	34.47	10.91	34.24	34.90	46.04	54.00	7.96	Average
5470.050	34.47	10.91	34.24	34.95	46.09	54.00	7.91	Average
@ 5501.840	34.40	10.93	34.24	72.98	84.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

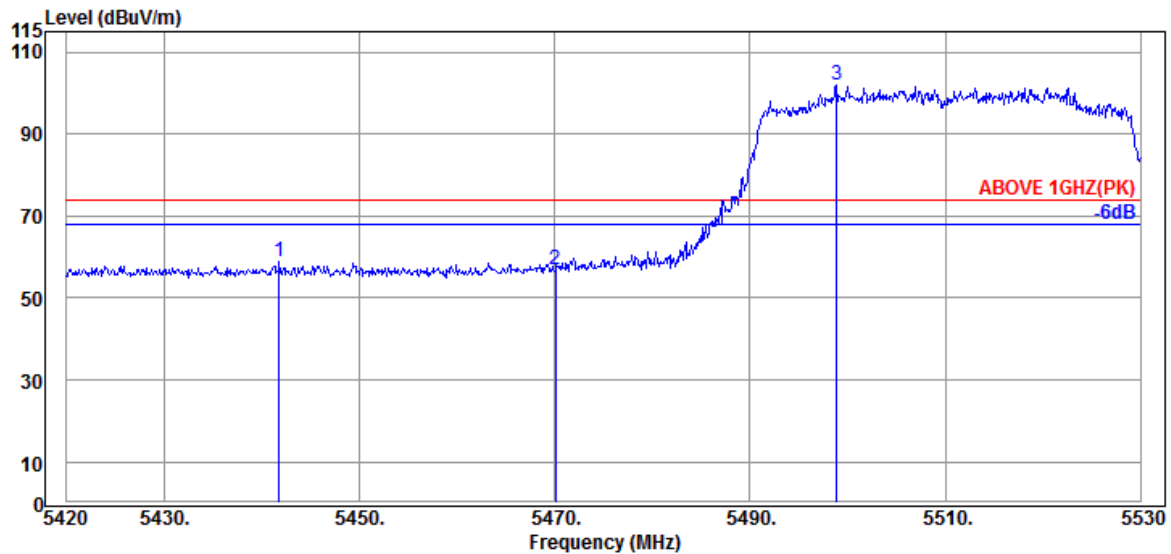

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.780	34.55	10.89	34.25	47.52	58.71	74.00	15.29	Peak
5470.050	34.47	10.91	34.24	45.86	57.00	74.00	17.00	Peak
@ 5498.870	34.40	10.93	34.23	90.70	101.80	---	---	Peak

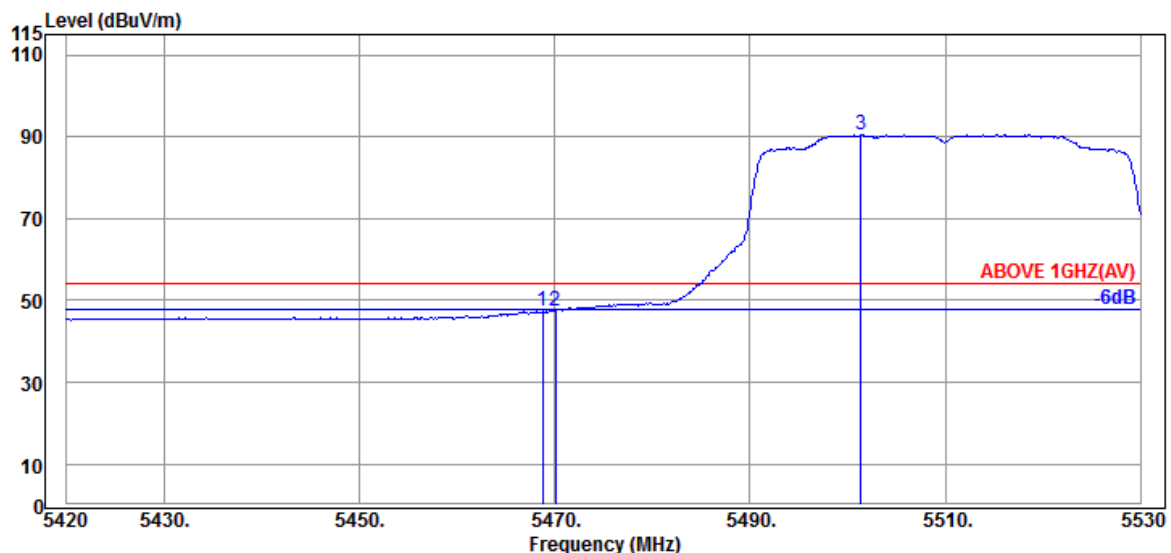

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	34.47	10.91	34.24	36.26	47.40	54.00	6.60	Average
5470.050	34.47	10.91	34.24	36.42	47.56	54.00	6.44	Average
@ 5501.400	34.40	10.93	34.24	79.41	90.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

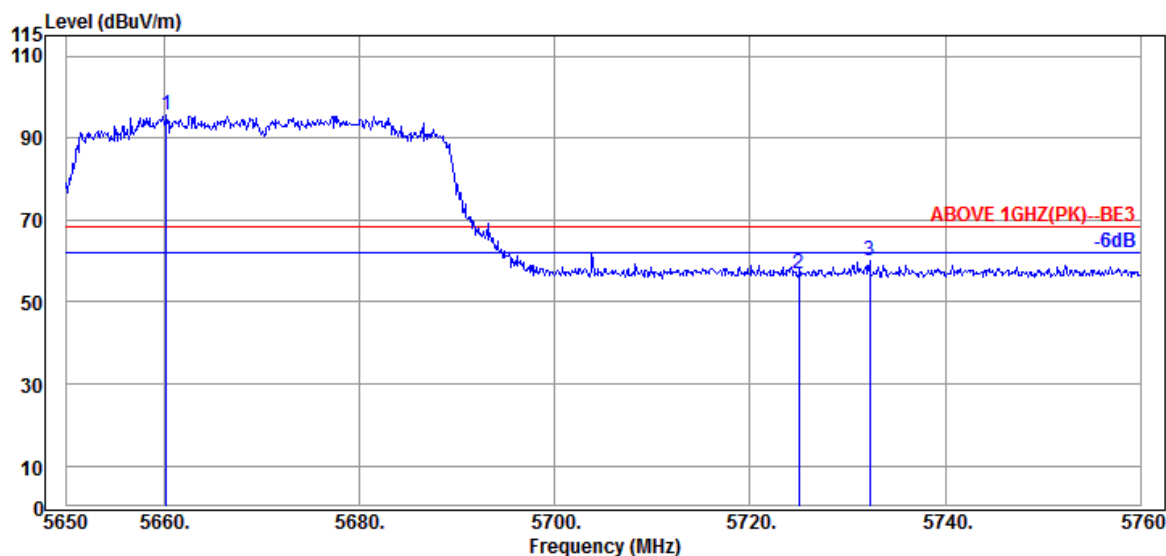

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5660.230	34.40	11.01	34.30	84.70	95.81	---	---	Peak
	5725.020	34.67	11.05	34.32	45.51	56.91	68.20	11.29	Peak
	5732.280	34.67	11.05	34.33	48.57	59.96	68.20	8.24	Peak

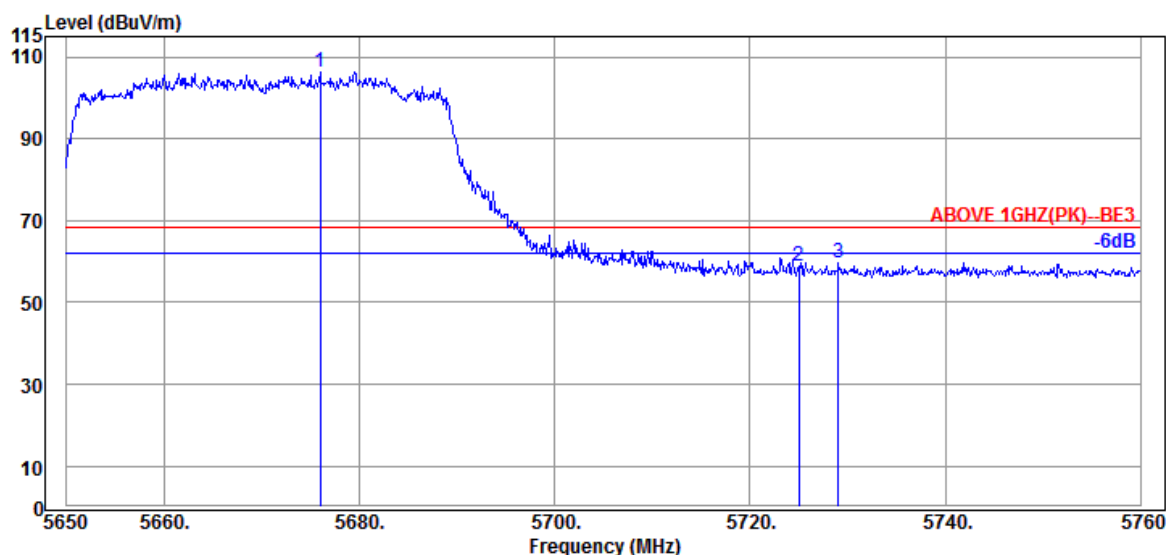

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5675.960	34.40	11.03	34.30	95.08	106.21	---	---	Peak
	5725.020	34.67	11.05	34.32	47.35	58.75	68.20	9.45	Peak
	5729.090	34.67	11.05	34.32	48.29	59.69	68.20	8.51	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

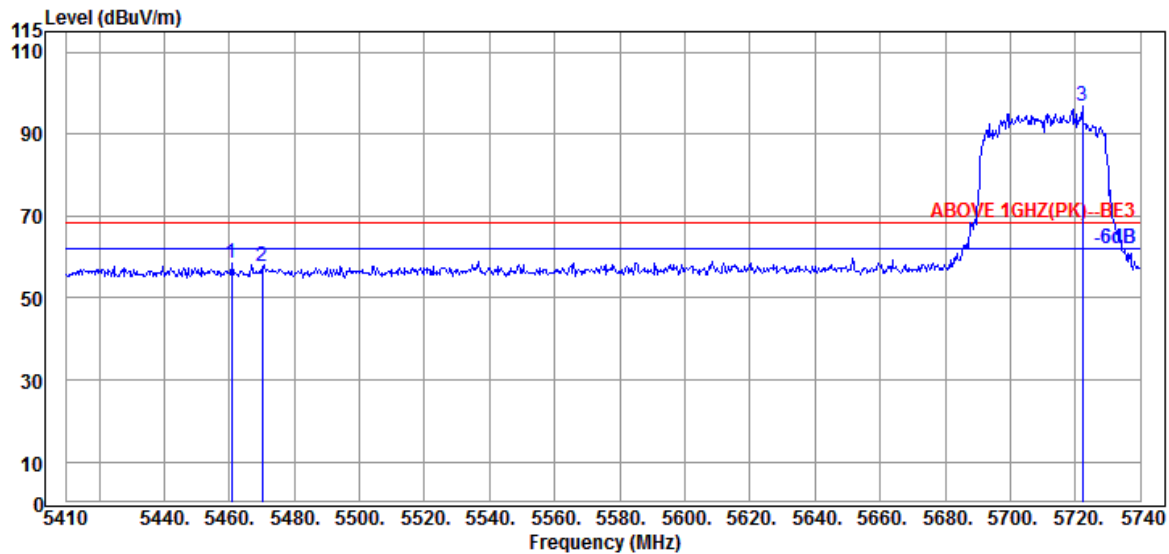

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.820	34.50	10.91	34.24	47.16	58.33	68.20	9.87	Peak
5470.060	34.47	10.91	34.24	46.73	57.87	68.20	10.33	Peak
@ 5722.180	34.67	11.05	34.32	85.27	96.67	---	---	Peak

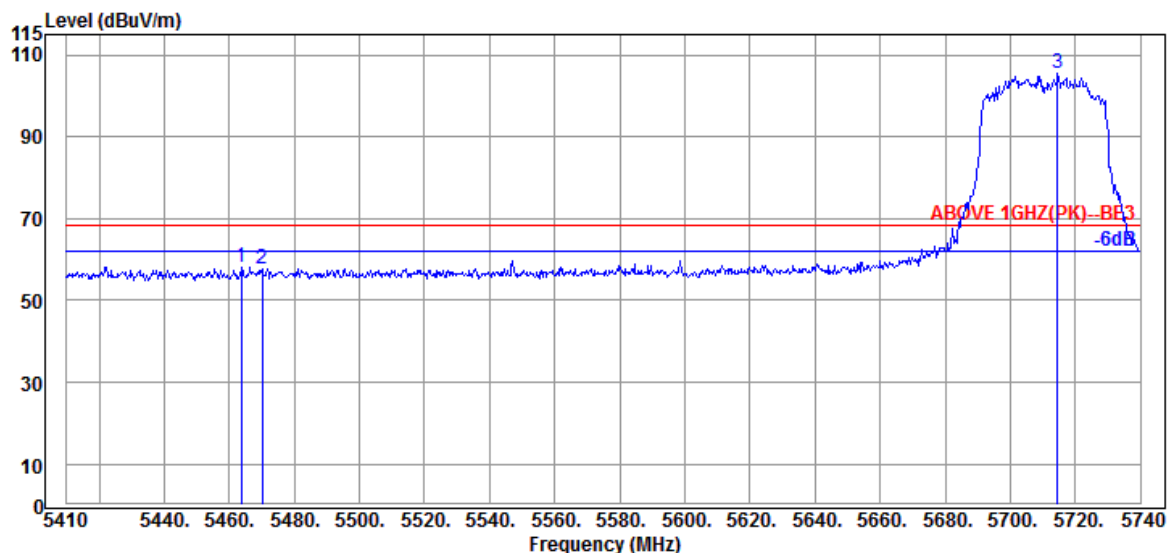

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	34.47	10.91	34.24	46.94	58.08	68.20	10.12	Peak
5470.060	34.47	10.91	34.24	46.38	57.52	68.20	10.68	Peak
@ 5714.590	34.53	11.05	34.32	94.06	105.32	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

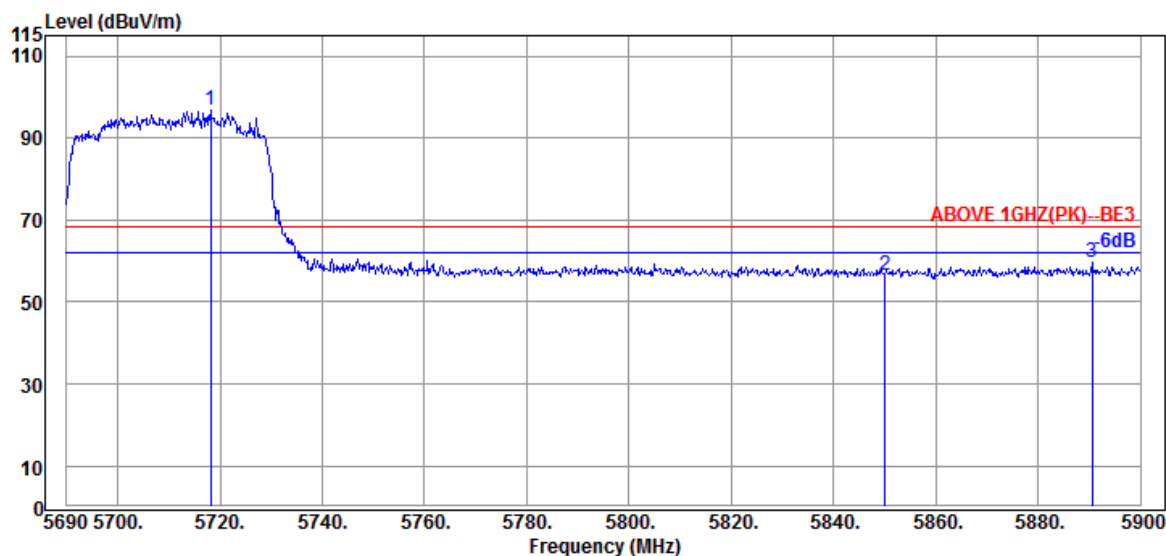

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5718.140	34.53	11.05	34.32	85.49	96.75	---	---	Peak
	5850.020	35.10	11.10	34.38	44.72	56.54	68.20	11.66	Peak
	5890.550	35.40	11.12	34.40	47.74	59.86	68.20	8.34	Peak

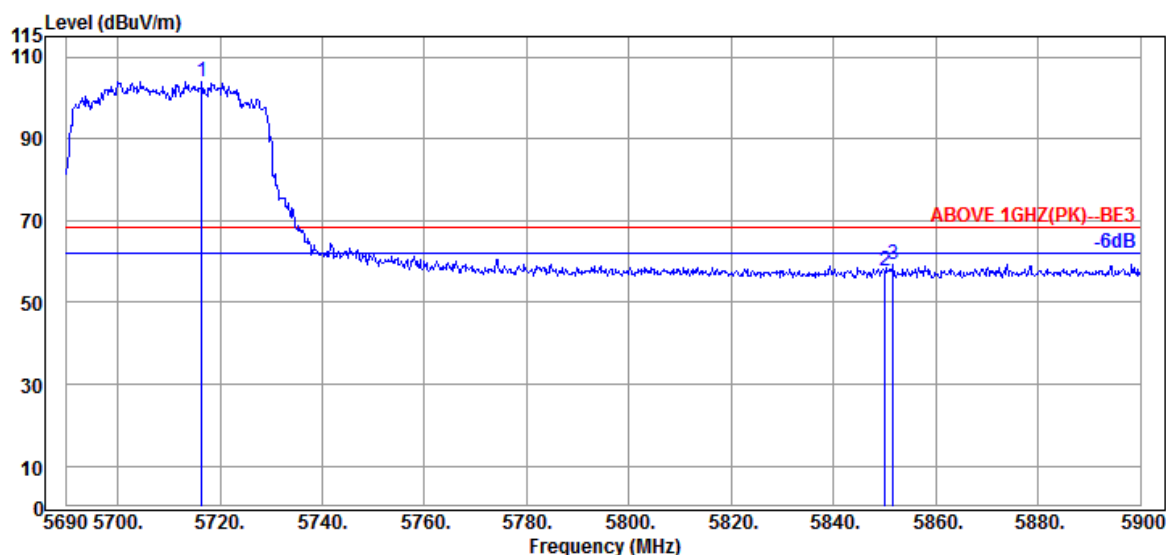

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5716.460	34.53	11.05	34.32	92.79	104.05	---	---	Peak
	5850.020	35.10	11.10	34.38	45.94	57.76	68.20	10.44	Peak
	5851.700	35.10	11.10	34.38	47.54	59.36	68.20	8.84	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

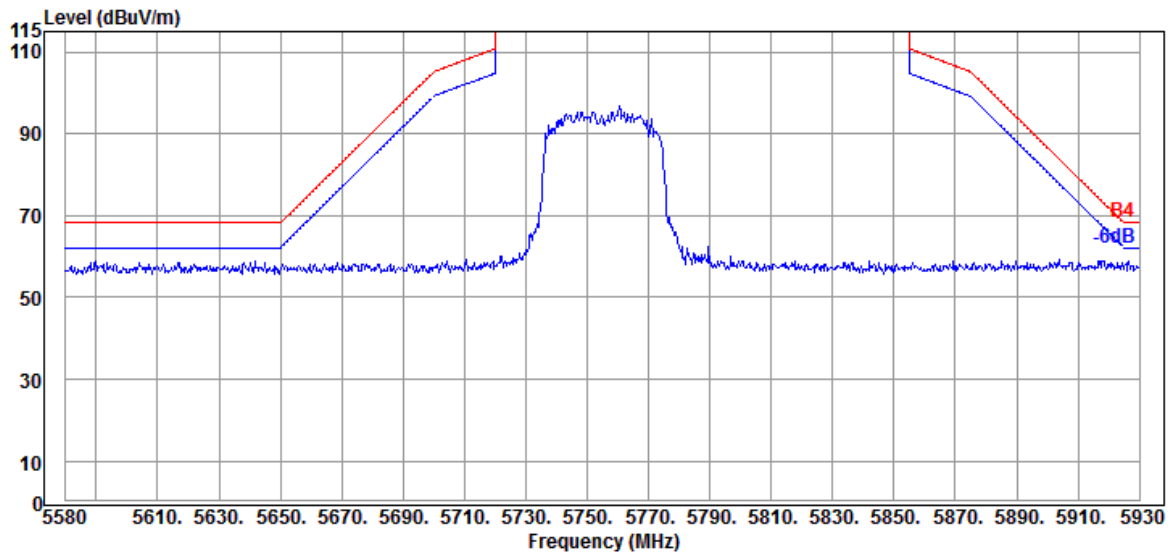

Antenna at Vertical Polarization

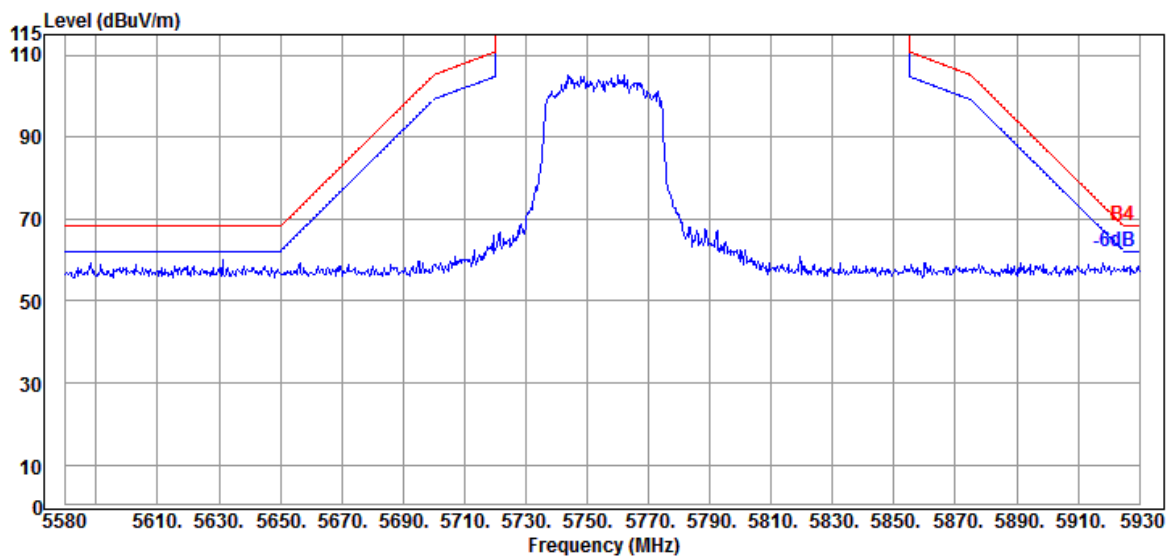

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

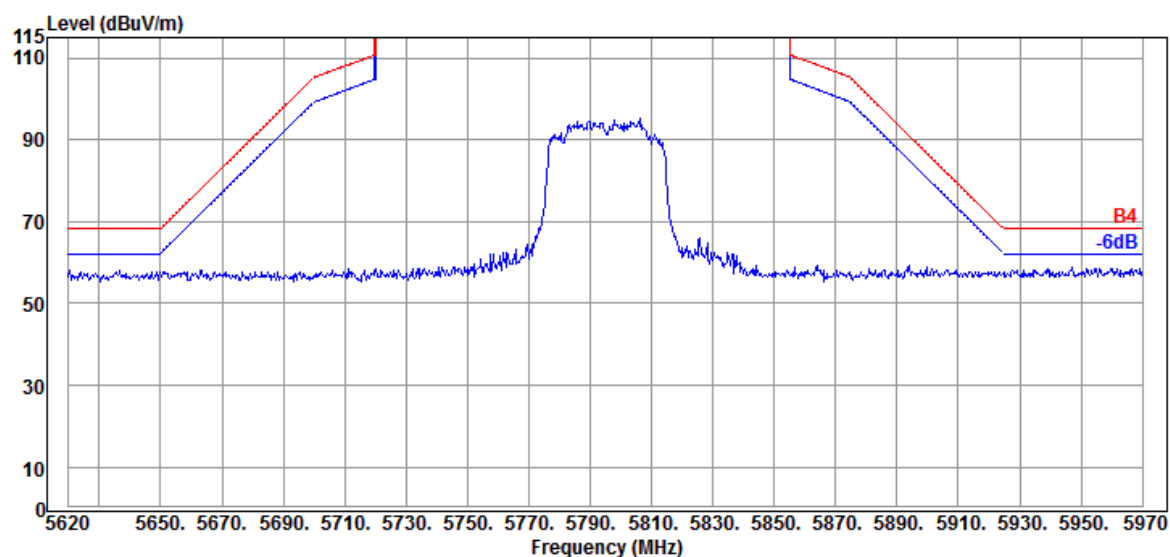

Antenna at Vertical Polarization

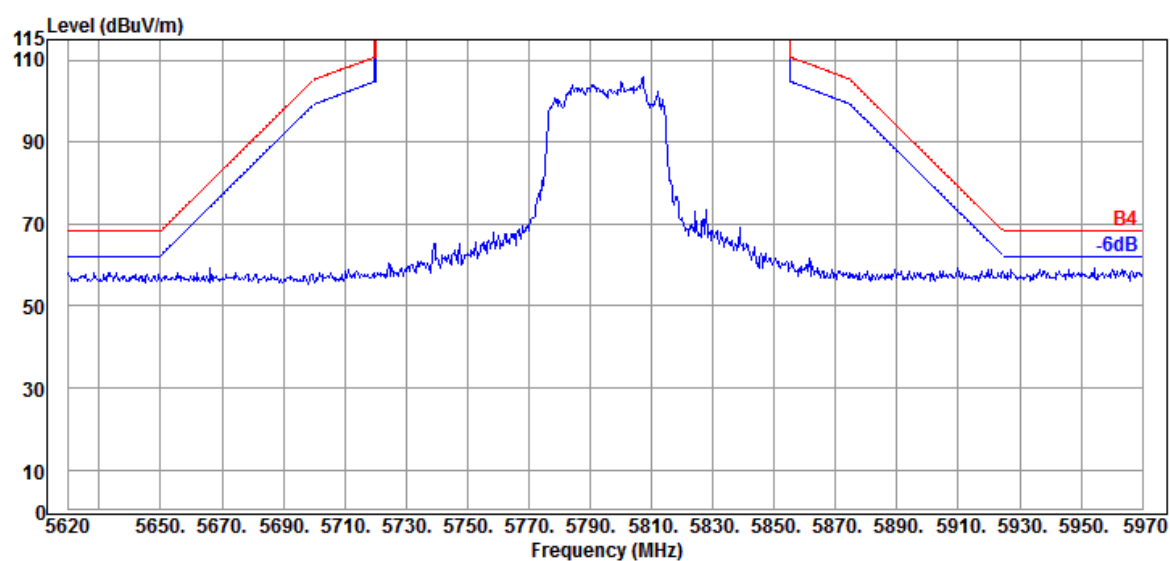

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

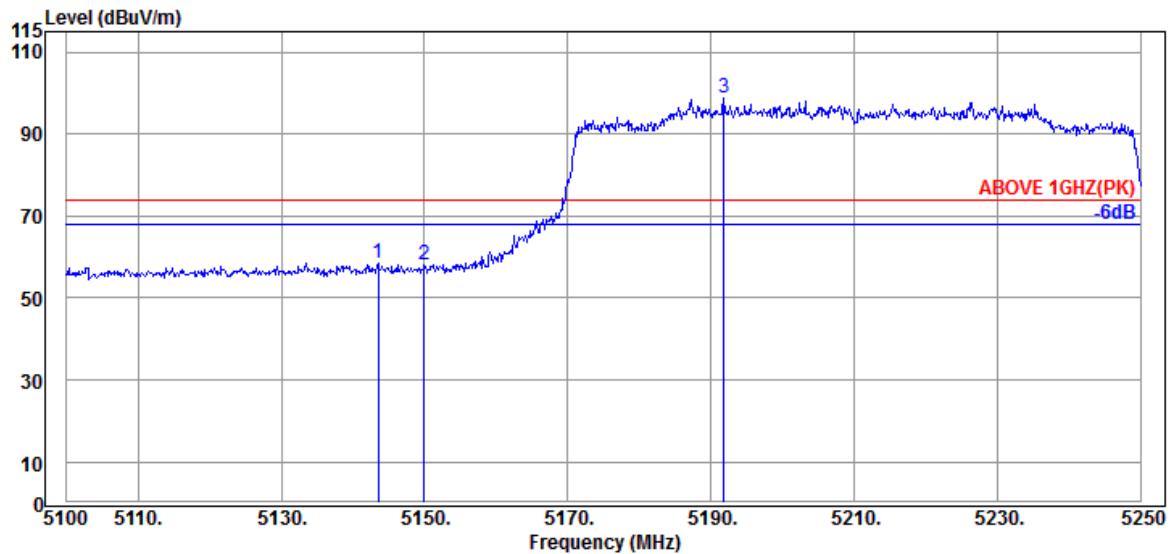

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.500	34.20	10.70	34.36	48.12	58.66	74.00	15.34	Peak
5149.950	34.20	10.70	34.35	47.42	57.97	74.00	16.03	Peak
@ 5191.800	34.20	10.74	34.34	88.12	98.72	---	---	Peak

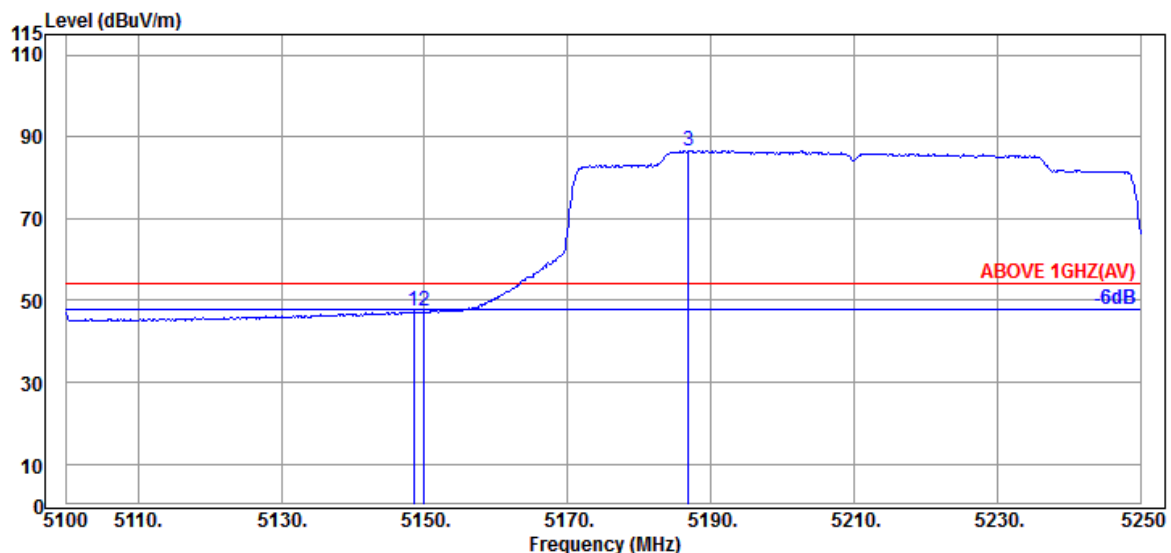

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.450	34.20	10.70	34.35	36.75	47.30	54.00	6.70	Average
5149.950	34.20	10.70	34.35	36.87	47.42	54.00	6.58	Average
@ 5186.850	34.20	10.72	34.34	76.07	86.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

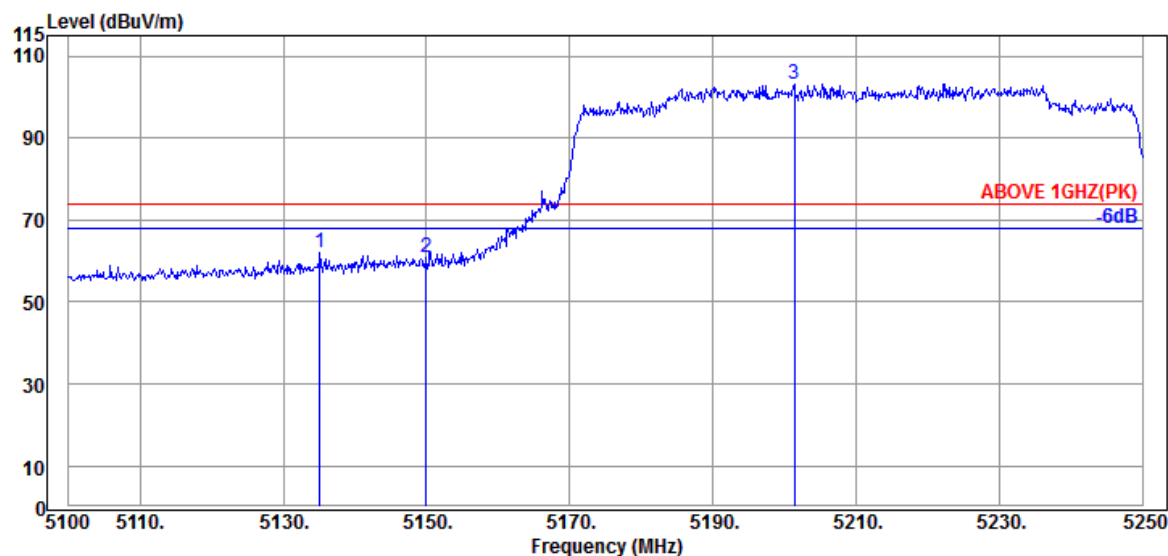

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.100	34.17	10.70	34.36	51.41	61.92	74.00	12.08	Peak
5149.950	34.20	10.70	34.35	50.34	60.89	74.00	13.11	Peak
@ 5201.400	34.20	10.74	34.33	92.71	103.32	---	---	Peak

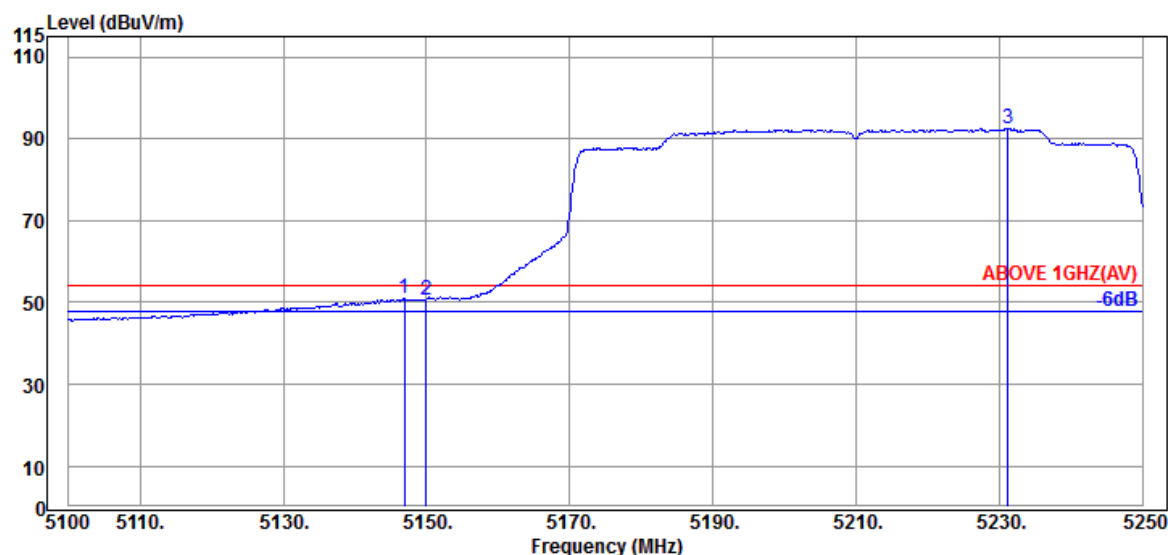

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.950	34.20	10.70	34.35	40.25	50.80	54.00	3.20	Average
5149.950	34.20	10.70	34.35	40.12	50.67	54.00	3.33	Average
@ 5231.250	34.30	10.76	34.32	81.74	92.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

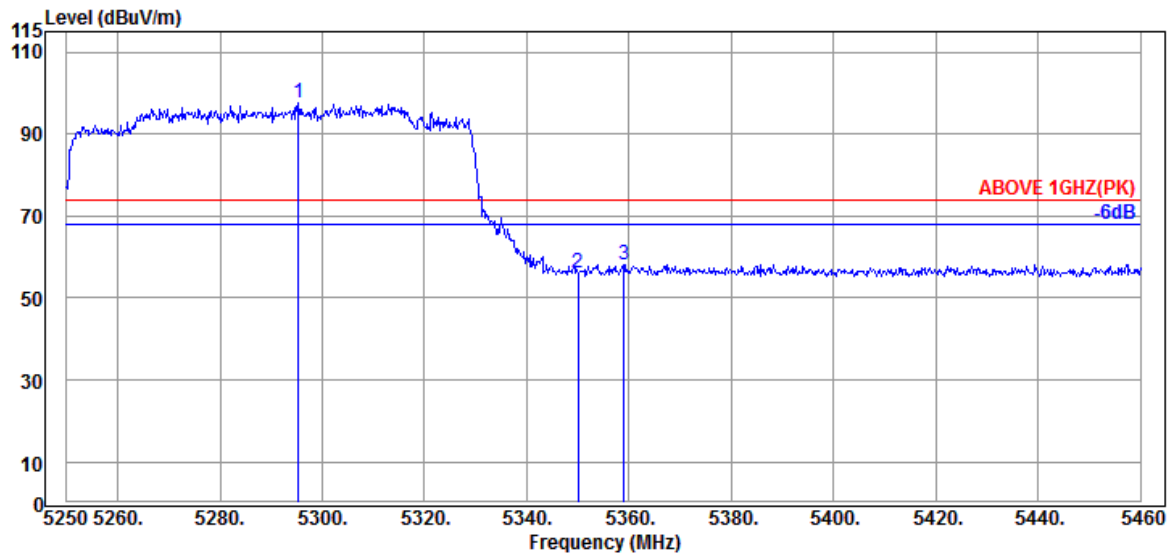

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5295.360	34.50	10.81	34.30	86.42	97.43	---	---	Peak
5349.960	34.60	10.83	34.27	44.80	55.96	74.00	18.04	Peak
5358.990	34.63	10.85	34.27	47.04	58.25	74.00	15.75	Peak

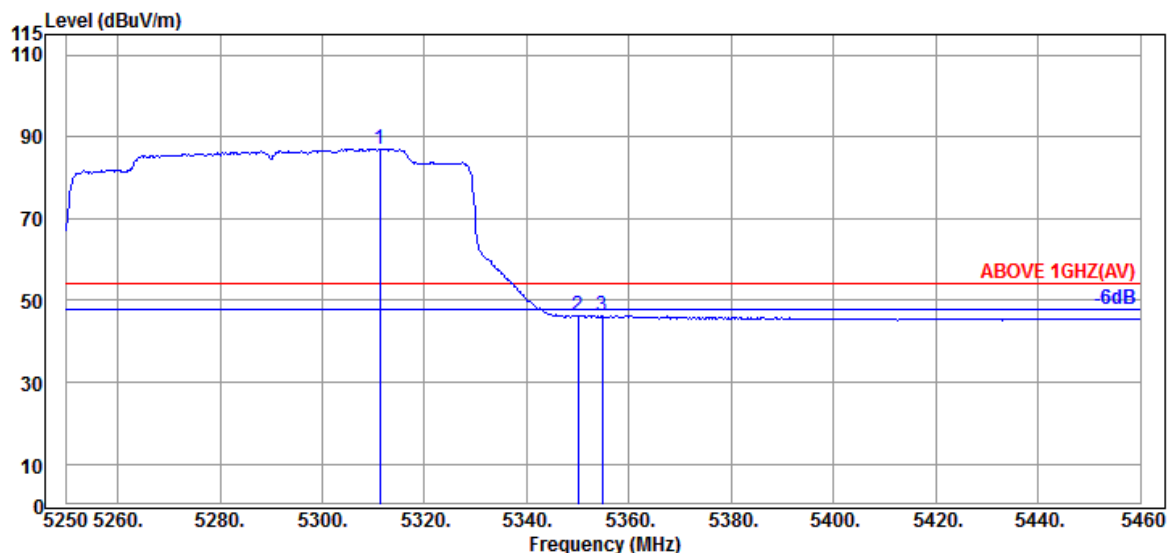

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.320	34.53	10.81	34.29	76.07	87.12	---	---	Average
5349.960	34.60	10.83	34.27	35.04	46.20	54.00	7.80	Average
5354.790	34.63	10.83	34.27	35.14	46.33	54.00	7.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

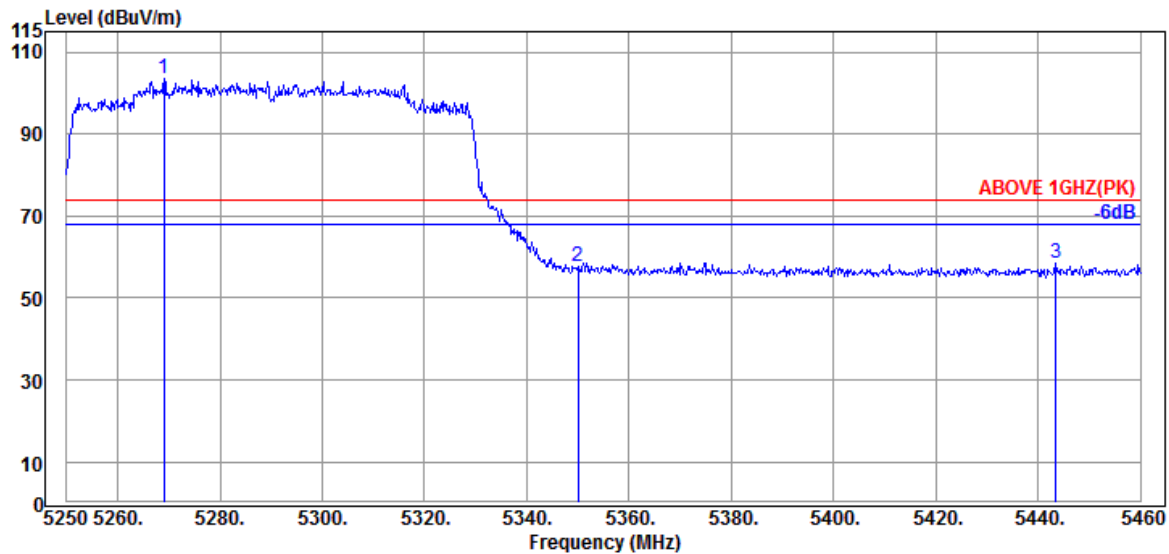

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.110	34.43	10.79	34.31	92.45	103.36	---	---	Peak
5349.960	34.60	10.83	34.27	46.63	57.79	74.00	16.21	Peak
5443.410	34.55	10.89	34.25	47.36	58.55	74.00	15.45	Peak

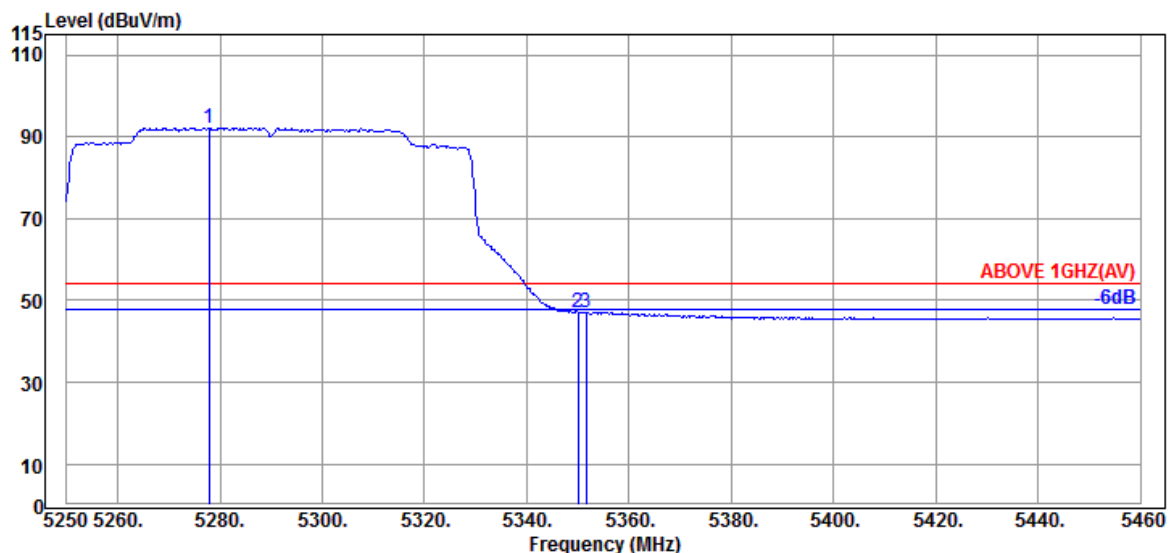

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.930	34.47	10.79	34.30	81.27	92.23	---	---	Average
5349.960	34.60	10.83	34.27	35.87	47.03	54.00	6.97	Average
5351.640	34.60	10.83	34.27	36.03	47.19	54.00	6.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

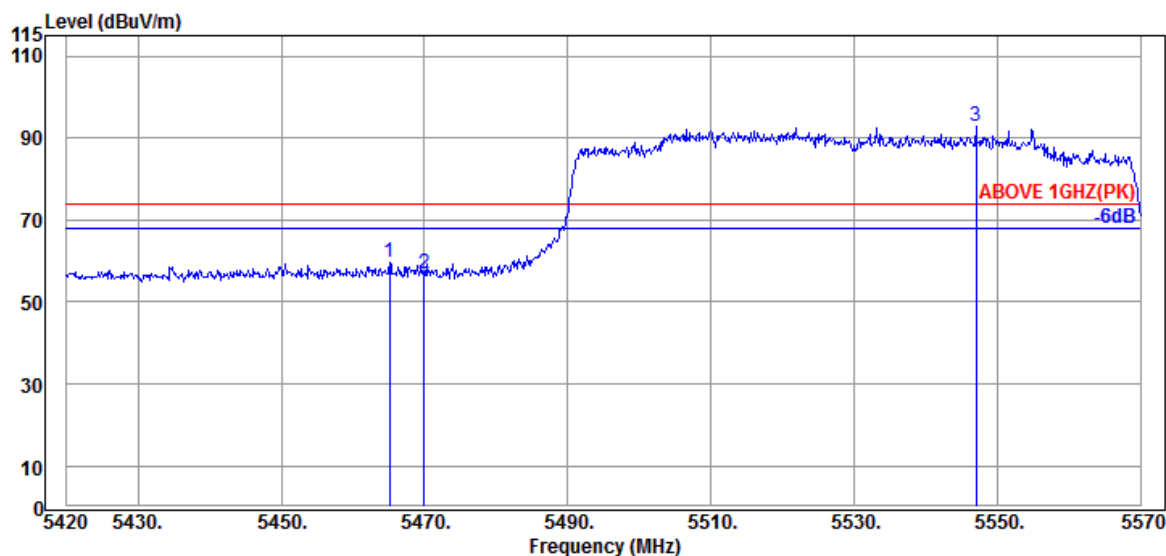

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.150	34.47	10.91	34.24	48.58	59.72	74.00	14.28	Peak
5469.950	34.47	10.91	34.24	45.80	56.94	74.00	17.06	Peak
@ 5547.050	34.30	10.95	34.25	81.78	92.78	---	---	Peak

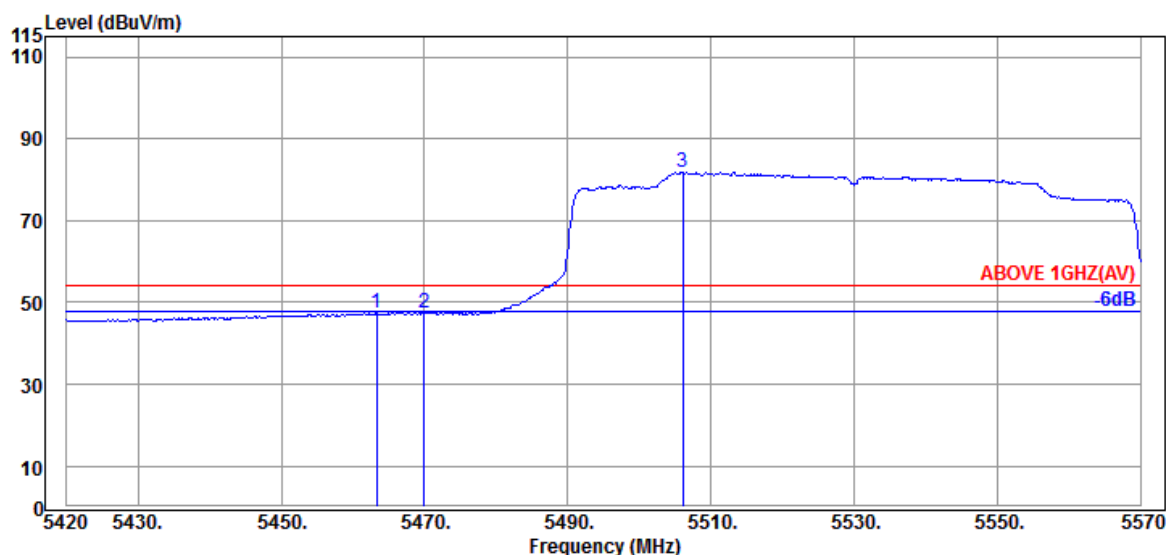

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.350	34.50	10.91	34.24	36.33	47.50	54.00	6.50	Average
5469.950	34.47	10.91	34.24	36.09	47.23	54.00	6.77	Average
@ 5506.100	34.40	10.93	34.24	70.73	81.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

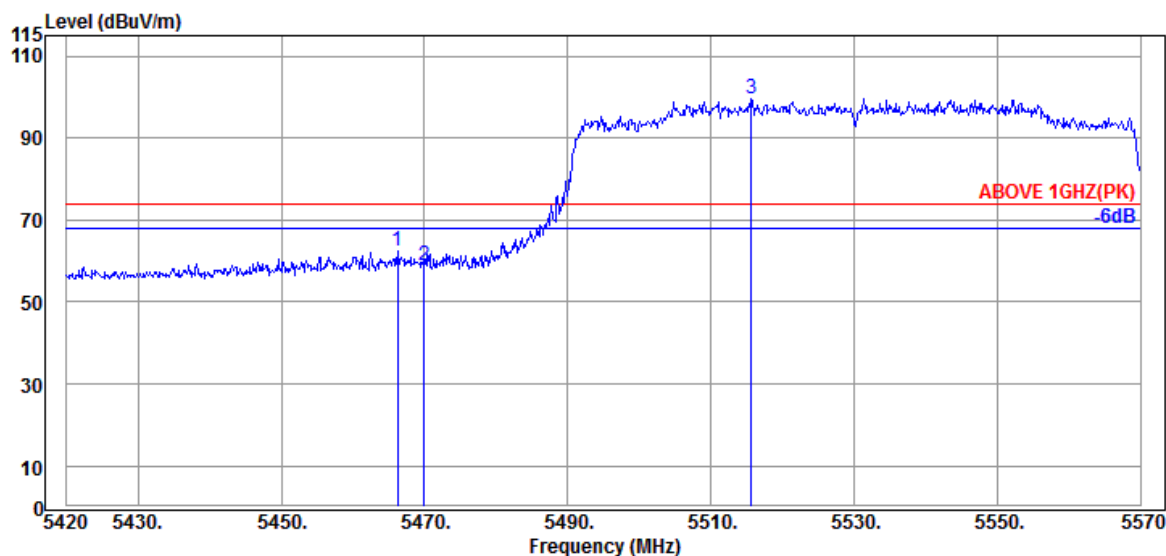

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.47	10.91	34.24	51.30	62.44	74.00	11.56	Peak
5469.950	34.47	10.91	34.24	47.65	58.79	74.00	15.21	Peak
@ 5515.700	34.37	10.93	34.24	88.50	99.56	---	---	Peak

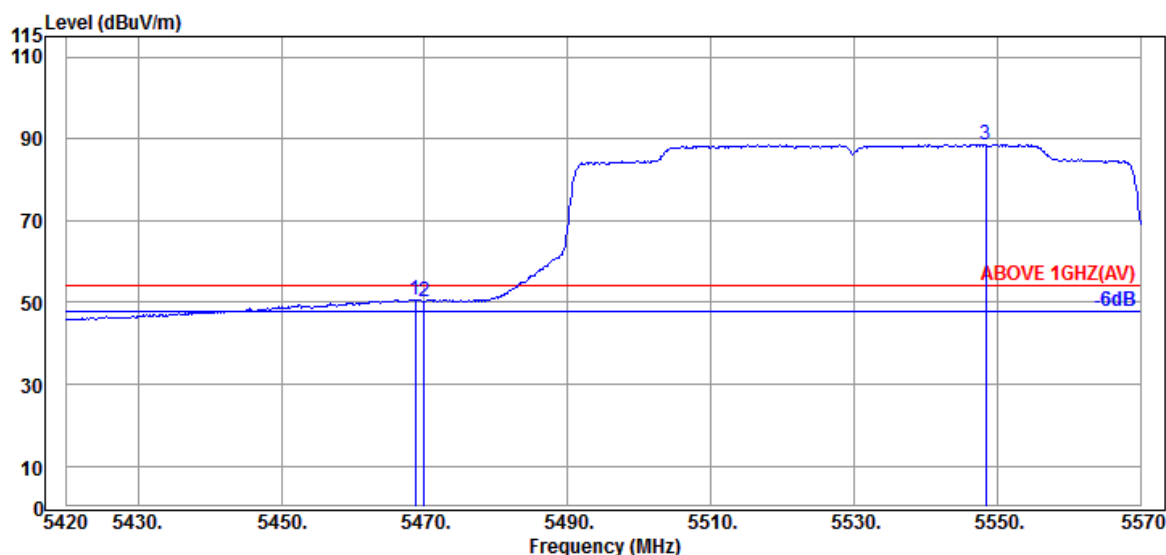

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	10.91	34.24	39.51	50.65	54.00	3.35	Average
5469.950	34.47	10.91	34.24	39.09	50.23	54.00	3.77	Average
@ 5548.400	34.30	10.95	34.25	77.64	88.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

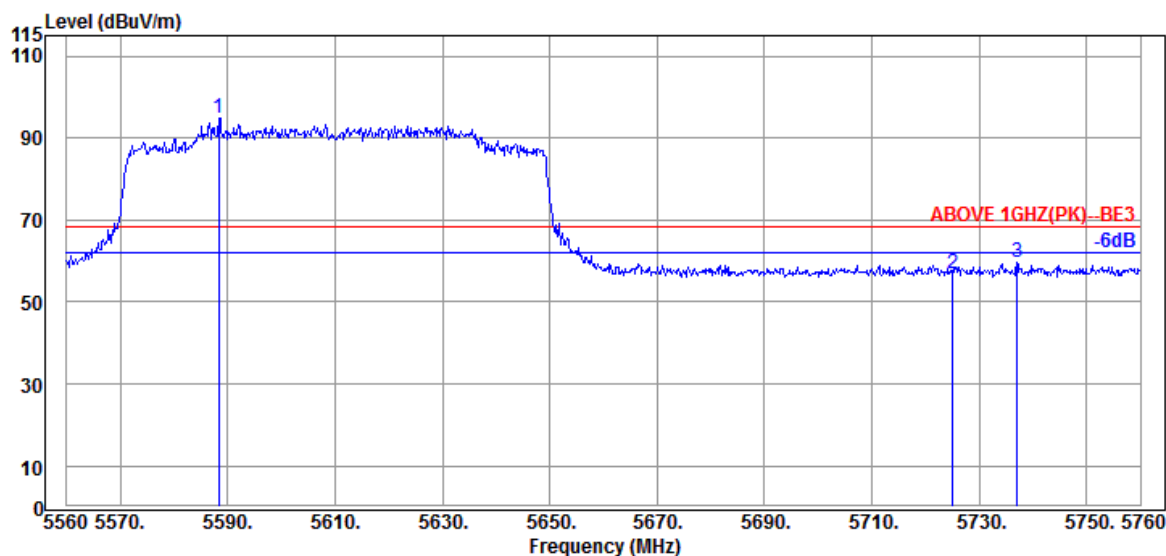

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5588.400	34.37	10.97	34.27	83.85	94.92	---	---	Peak
	5725.000	34.67	11.05	34.32	45.64	57.04	68.20	11.16	Peak
	5737.000	34.67	11.05	34.33	48.23	59.62	68.20	8.58	Peak

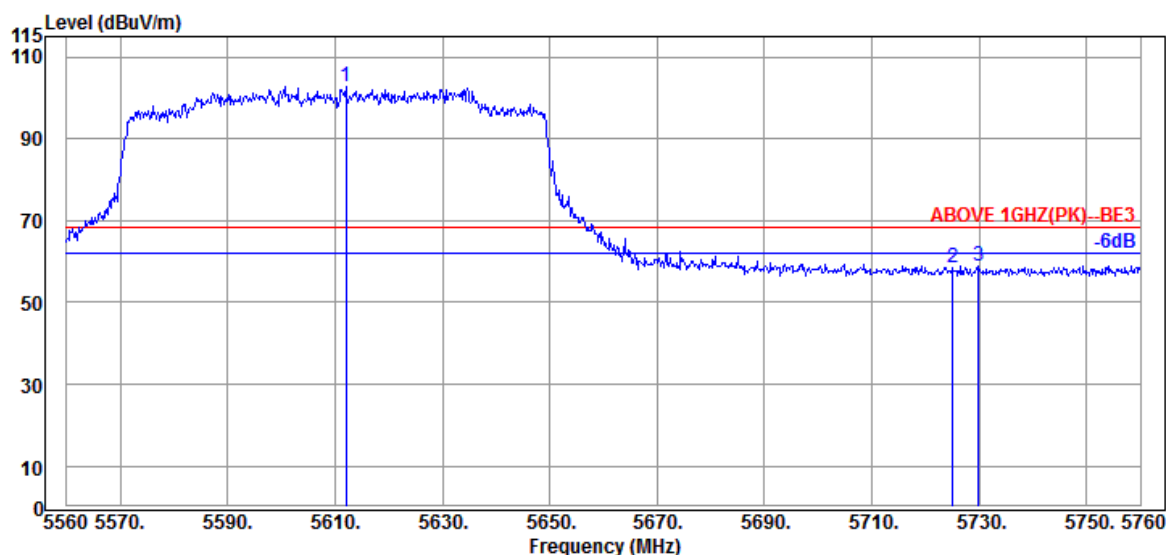

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5612.000	34.40	10.99	34.28	91.54	102.65	---	---	Peak
	5725.000	34.67	11.05	34.32	46.92	58.32	68.20	9.88	Peak
	5729.800	34.67	11.05	34.32	47.66	59.06	68.20	9.14	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

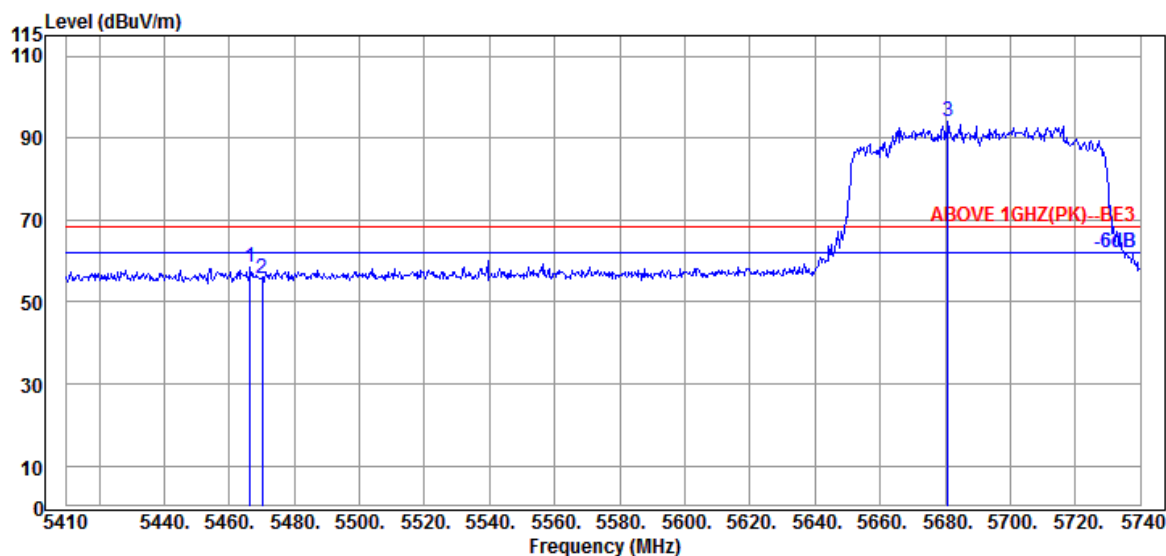

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.47	10.91	34.24	47.20	58.34	68.20	9.86	Peak
5470.060	34.47	10.91	34.24	44.72	55.86	68.20	12.34	Peak
@ 5680.930	34.40	11.03	34.31	82.98	94.10	---	---	Peak

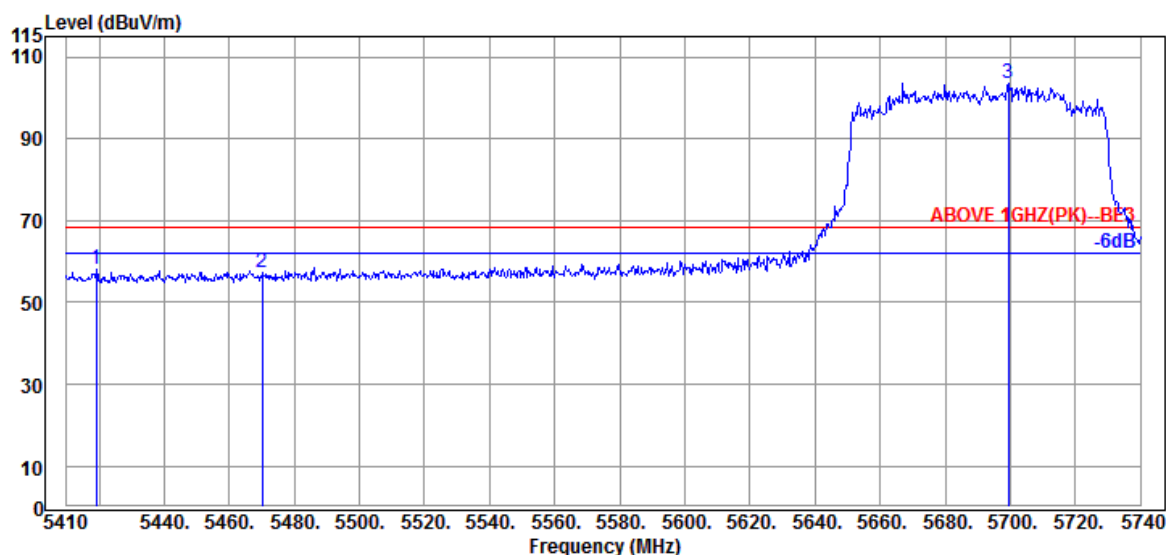

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.240	34.60	10.87	34.26	46.69	57.90	68.20	10.30	Peak
5470.060	34.47	10.91	34.24	46.21	57.35	68.20	10.85	Peak
@ 5699.410	34.40	11.03	34.31	92.47	103.59	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

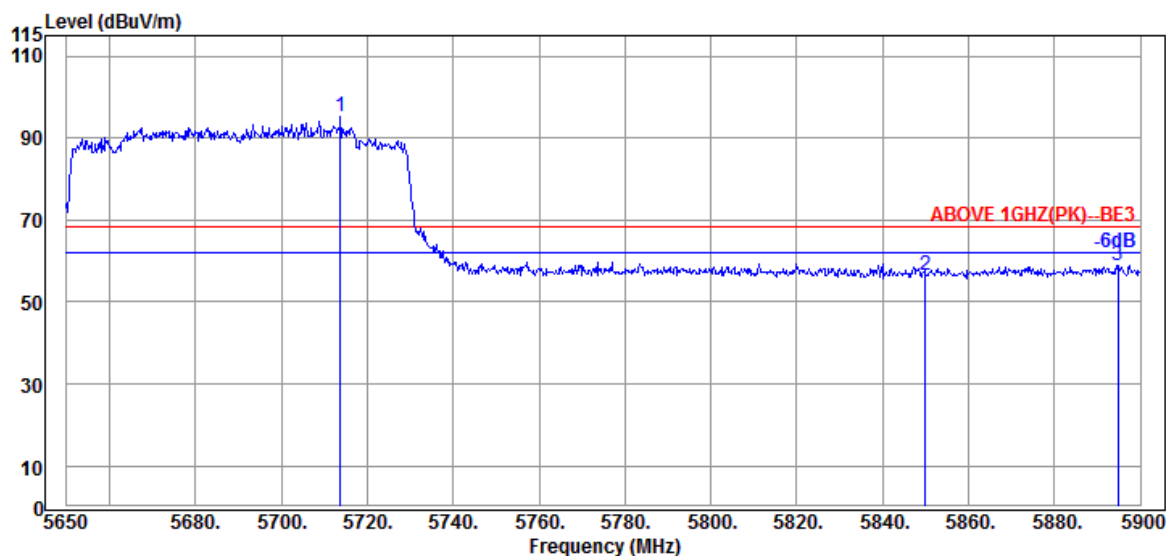

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5713.750	34.53	11.05	34.32	83.89	95.15	---	---	Peak
	5850.000	35.10	11.10	34.38	44.84	56.66	68.20	11.54	Peak
	5894.750	35.40	11.12	34.40	46.72	58.84	68.20	9.36	Peak

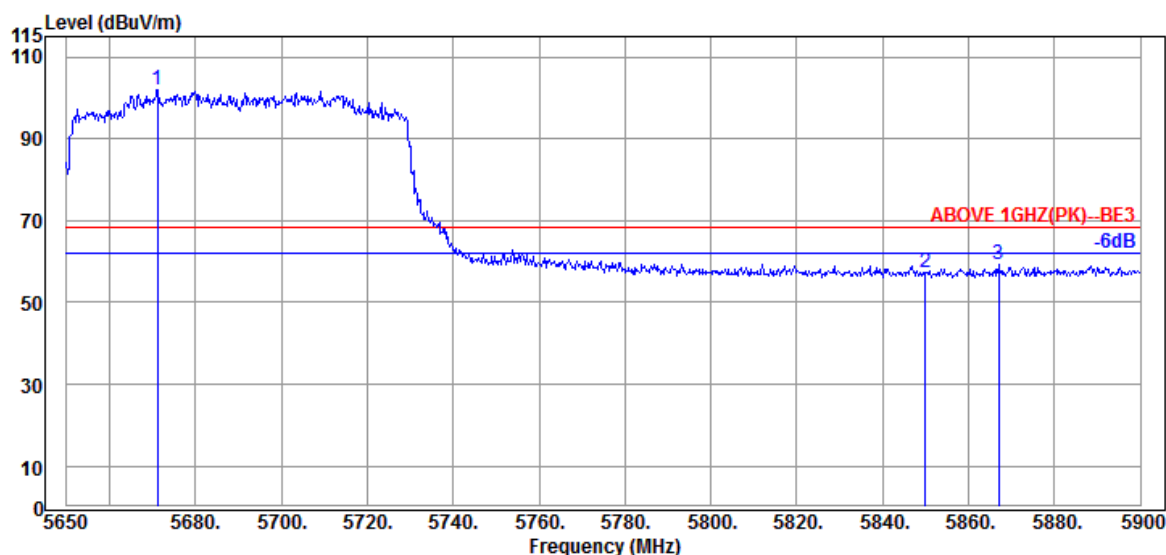

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5671.250	34.40	11.01	34.30	91.03	102.14	---	---	Peak
	5850.000	35.10	11.10	34.38	45.46	57.28	68.20	10.92	Peak
	5867.000	35.20	11.12	34.39	47.35	59.28	68.20	8.92	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2107431

Report Number: EM-F210603

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

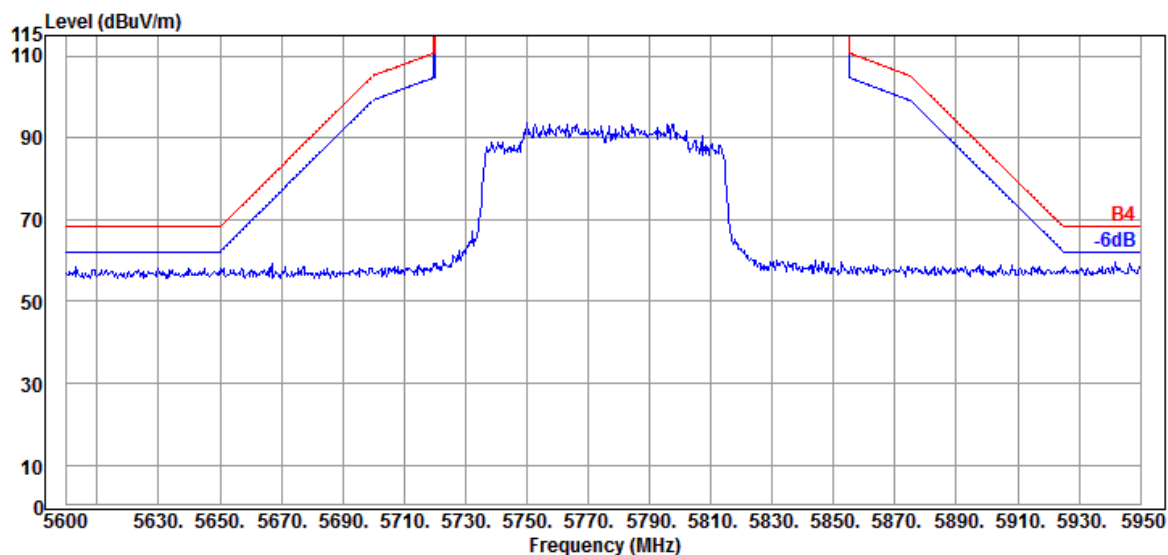

Antenna at Vertical Polarization

