

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant: LG Electronics Inc
170, Sungsanpaechong-ro, Seongsan-gu,
Changwon-si, Gyeongsangnam-do, 642-711, Korea.
Attn: Bogeun Lee / Research Engineer

Date of Issue: July 28, 2016
Order Number: GETEC-C1-16-292
Test Report Number: GETEC-E3-16-035
Test Site: GUMI UNIVERSITY EMC CENTER
(FCC Test Firm Registration No.: 269701)

FCC ID. : BEJS47423A


Applicant : LG Electronics Inc.

Rule Part(s) : FCC Part 18
Test Method : FCC/OET MP-5
EUT Type : Electric Range
Equipment Class : Part 18 Consumer Device(8CC)
Type of Authority : Certification
Model Name : LSE4617ST
Trade Mark : LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,


Hyun, Kim/ Senior Engineer
GUMI UNIVERSITY EMC CENTER

Reviewed by,


Jae-Hoon Jeong, Technical Manager
GUMI UNIVERSITY EMC CENTER



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 DEFINITION OF MODELS	5
3.3 SUPPORT EQUIPMENT / CABLES USED	6
3.4 MODIFICATION ITEM(S).....	6
4. DESCRIPTION OF TESTS.....	7
4.1 TEST CONDITION.....	7
5. CONDUCTED EMISSION.....	9
5.1 OPERATING ENVIRONMENT	10
5.2 TEST SET-UP	10
5.3 MEASUREMENT UNCERTAINTY.....	10
5.4 LIMIT	11
5.5 TEST EQUIPMENT USED.....	11
5.6 TEST DATA FOR CONDUCTED EMISSION	11
6. RADIATED EMISSION	16
6.1 OPERATING ENVIRONMENT	16
6.2 TEST SET-UP	16
6.3 MEASUREMENT UNCERTAINTY.....	17
6.4 LIMIT	18
6.5 TEST EQUIPMENT USED.....	18
6.6 TEST DATA FOR RADIATED EMISSION.....	19
7. SAMPLE CALCULATIONS.....	20
7.1 EXAMPLE 1 :	20
7.2 EXAMPLE 2 :	20
8. RECOMMENDATION & CONCLUSION.....	20
 APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – LABELLING	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – SCHEMATIC DIAGRAM	
APPENDIX E – TEST SETUP PHOTOGRAPH	
APPENDIX F – EXTERNAL PHOTOGRAPH	
APPENDIX G – INTERNAL PHOTOGRAPH	
APPENDIX H – USER’S MANUAL	
APPENDIX I – OPERATIONAL DESCRIPTION	
APPENDIX J – PART LIST	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 642-711, Korea

Manufacturer: LG Electronics Inc..

Manufacturer Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 642-711, Korea

Contact Person: Bogeun Lee / Research Engineer

Telephone Number: +82-55-260-3966

● FCC ID.	BEJS47423A			
● EUT Type	Electric Range			
● Model Name	LSE4617ST			
● Rule Part(s)	FCC Part 18			
● Test Method	FCC/OET MP-5			
● Type of Authority	Certification			
● Test Procedure(s)	FCC/OET MP-5			
● Dates of Test	July 06~12, 2016			
● Place of Test	GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.			
● Test Report Number	GETEC-E3-16-035			
● Dates of Issue	July 28, 2016			

EUT Type: Electric Range

FCC ID.: BEJS47423A





2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. Electric Range (Model name: LSE4617ST)**.

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Gyeongnam 641-713, Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2009)

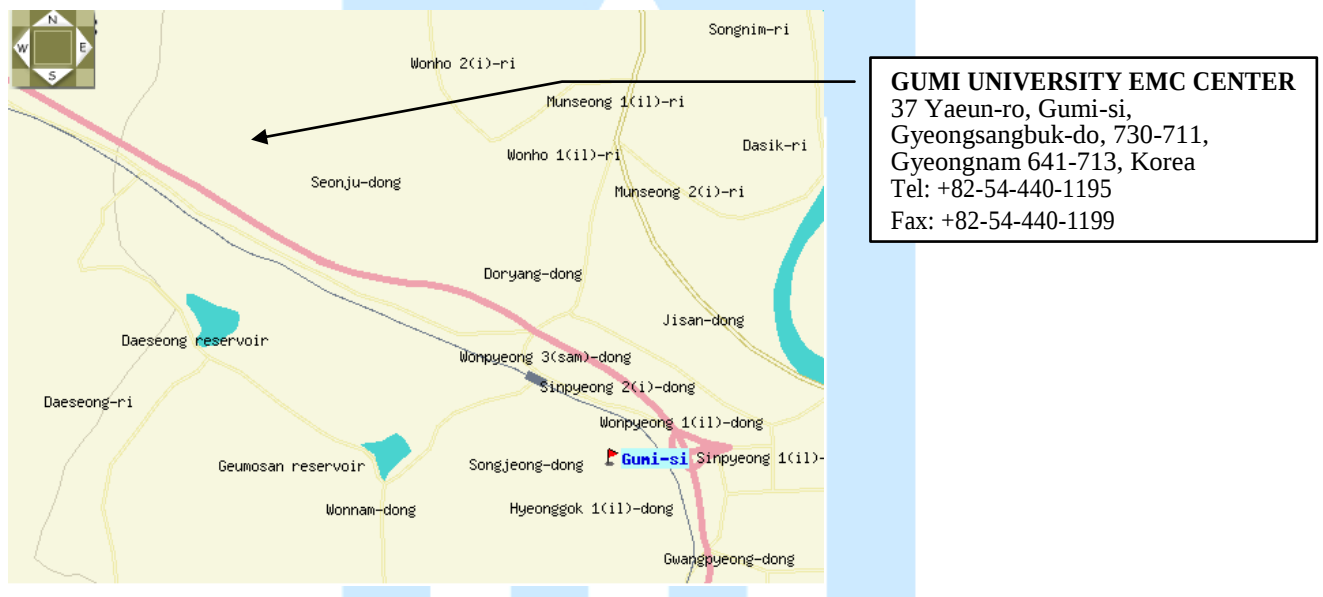


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. Electric Range (Model Name: LSE4617ST)**
FCC ID.: BEJS47423A.

Oven Range Models	LSE4617
Description	Electric Slide In Oven Range
Electrical requirements	12.7 kW 120/240 VAC
Exterior Dimensions	29 ⁷ / ₈ " (W) x 37 ⁷ / ₈ " (H) x 26 ¹ / ₂ " (D) (D with door closed) 75.7 cm (W) x 96 cm (H) x 67.3 cm (D) (D with door closed)
Height to cooking surface	36" (91.4 cm)
Net weight	198 lb (90.0 kg)
Total capacity	Total cap.: 6.3 cu. ft.

Induction heating mode

	Low frequency (Maximum power)	High frequency (Minimum power)
Large Hob	21 kHz	50 kHz
Medium Hob	33 kHz	55 kHz
Small Hob #1	35 kHz	55 kHz
Small Hob #2	35 kHz	55 kHz

3.2 Definition of models

- None.

EUT Type: Electric Range

FCC ID.: BEJS47423A





3.3 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

See “Appendix E – Test Setup Photographs” for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None.	-	-	S/N: -. FCC ID.: -.

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and AC power	1.30 m Unshielded.

3.4 Modification Item(s)

-. None



4. Description of tests


4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 240 V, 60 Hz
- Operating condition during the test(s) :
This device has been tested in the configurations of Induction mode
Induction mode: This device has been operated with an enameled steel vessel filled with tap water up to 80 % of its maximum capacity.

cooking element "1"= left front , "2"=left rear, "3"=center rear, "4"=right front

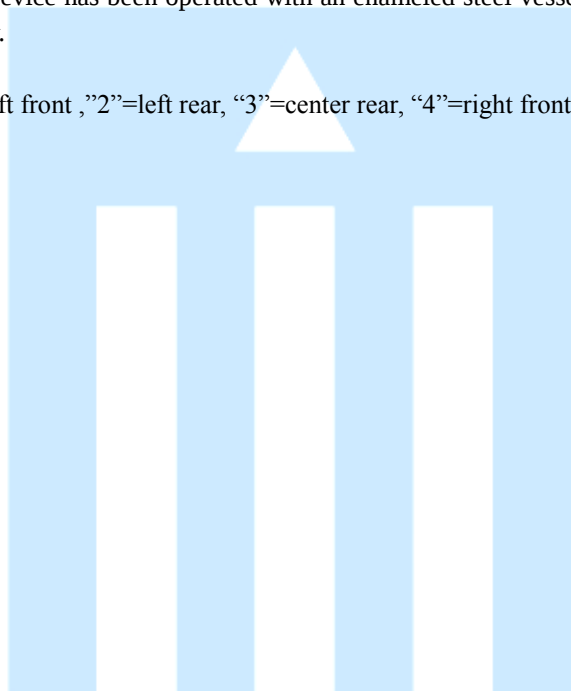



4.2 General Test Procedures


Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which Fixed at 2 m above the ground plane to find out the highest emission.

And also, each emission was to be maximized by the table was turned from 0 degrees to 360 degrees. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2009).

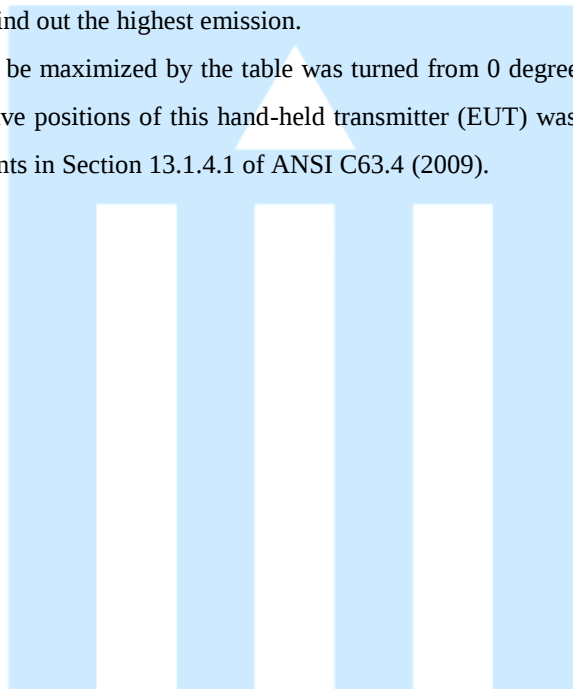



5. Conducted Emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.
(FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

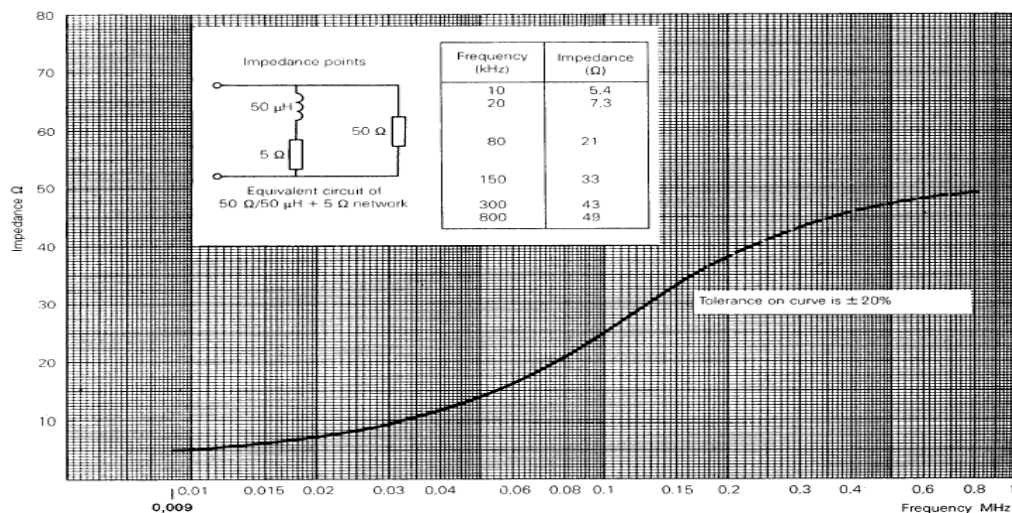


Fig 2. Impedance of LISN



5.1 Operating Environment

Temperature : 26.4 °C
Relative Humidity : 73.6 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.94 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.43 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



5.4 Limit

RFI Conducted	FCC Limit(dBμV/m)	
Freq. Range	Quasi-Peak	Average
0.009 MHz ~ 0.05 MHz	110	-
0.05 MHz ~ 0.15 MHz	90 ~ 80*	-
0.15 MHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 18, 2017
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 19, 2017
□ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 19, 2017
□ - ISN T8	TESEQ.GmbH	ISN	24568	Apr. 22, 2017
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	Apr. 19, 2017
■ - EMC 32	Rohde & Schwarz	Software	Ver.8.53	N/A


5.6 Test data for Conducted Emission

- Test Date	: July 06,2016
- Resolution Bandwidth	: 200 Hz (9 kHz ~ 0.15 MHz) / 9 kHz (0.15 MHz ~ 30 MHz)
- Frequency Range	: 9 kHz ~ 30 MHz
- Line	: L1: Live, N: Neutral
- Comment	: None



- Operating condition: Induction mode

Cooking element #1

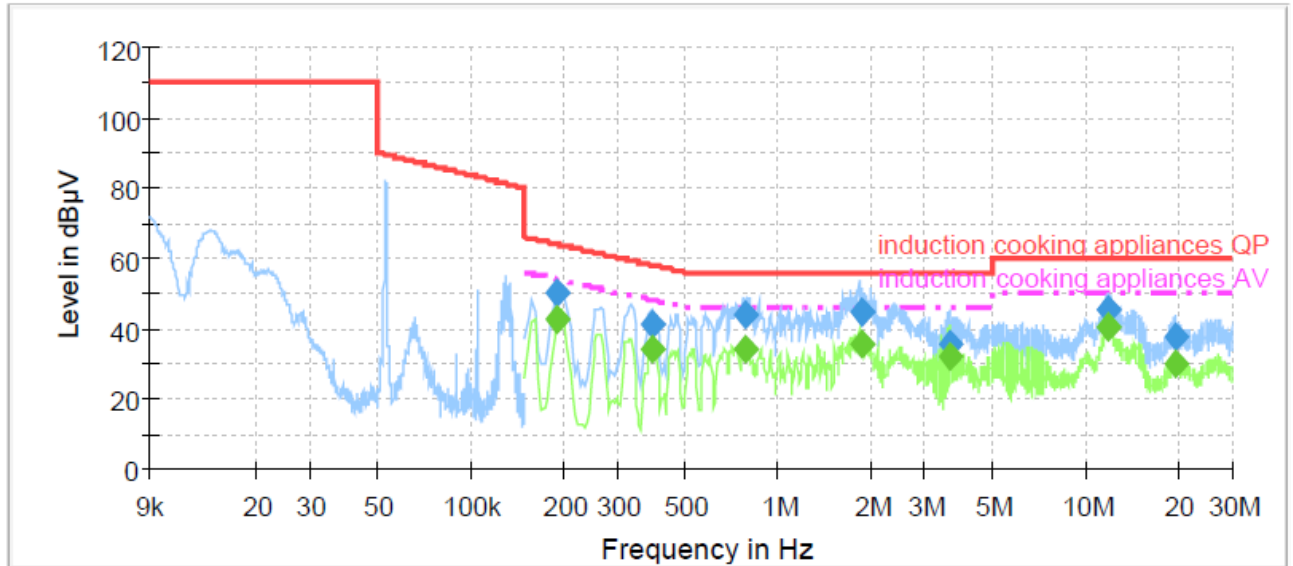

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.189250	50.5	100.0	9.000	GND	L1	10.0	13.6	64.1	
0.392250	41.4	100.0	9.000	GND	L1	10.1	16.6	58.0	
0.778850	44.1	100.0	9.000	GND	N	10.1	11.9	56.0	
1.864350	45.0	100.0	9.000	GND	N	10.2	11.0	56.0	
3.635450	35.5	100.0	9.000	GND	L1	10.7	20.5	56.0	
11.877750	45.4	100.0	9.000	GND	L1	11.9	14.6	60.0	
19.764650	37.6	100.0	9.000	GND	N	12.2	22.4	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.189250	42.5	100.0	9.000	GND	L1	10.0	11.6	54.1	
0.392250	34.4	100.0	9.000	GND	L1	10.1	13.6	48.0	
0.778850	34.3	100.0	9.000	GND	N	10.1	11.7	46.0	
1.864350	35.3	100.0	9.000	GND	N	10.2	10.7	46.0	
3.635450	31.8	100.0	9.000	GND	L1	10.7	14.2	46.0	
11.877750	40.3	100.0	9.000	GND	L1	11.9	9.7	50.0	
19.764650	30.1	100.0	9.000	GND	N	12.2	19.9	50.0	



Cooking element #2

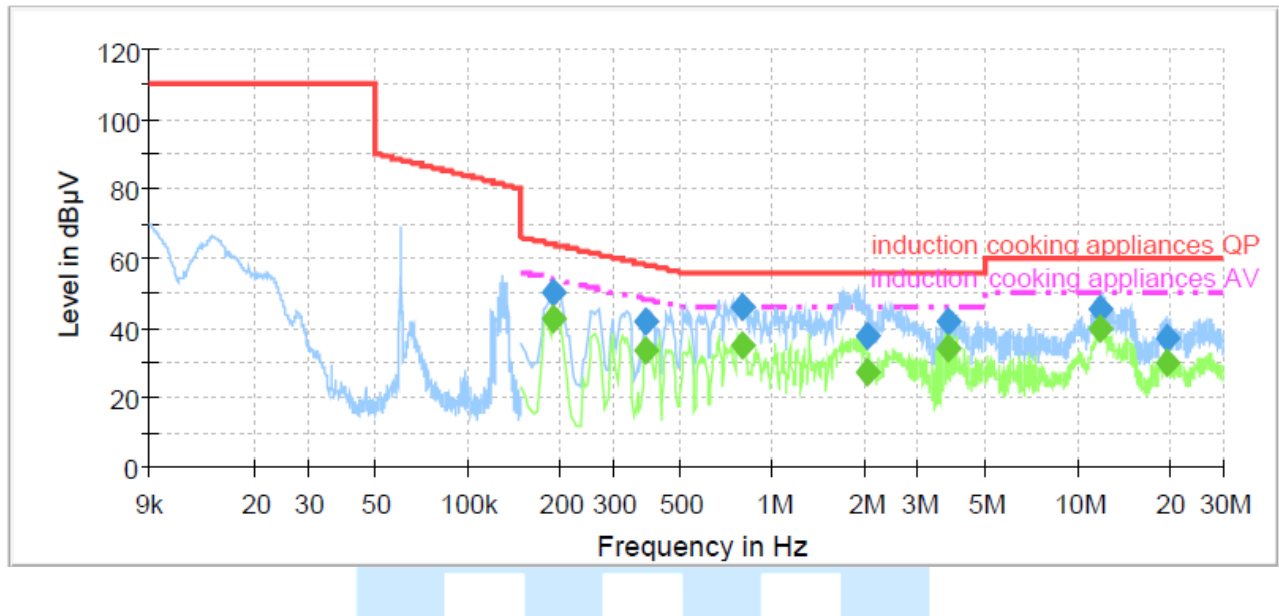

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.189250	50.5	100.0	9.000	GND	L1	10.0	13.6	64.1	
0.380350	41.7	100.0	9.000	GND	L1	10.1	16.5	58.3	
0.793950	45.7	100.0	9.000	GND	L1	10.1	10.3	56.0	
2.055550	37.6	100.0	9.000	GND	N	10.3	18.4	56.0	
3.746250	42.0	100.0	9.000	GND	L1	10.8	14.0	56.0	
11.987650	45.2	100.0	9.000	GND	L1	11.9	14.8	60.0	
19.749350	37.1	100.0	9.000	GND	N	12.2	22.9	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.189250	42.6	100.0	9.000	GND	L1	10.0	11.5	54.1	
0.380350	33.5	100.0	9.000	GND	L1	10.1	14.8	48.3	
0.793950	35.2	100.0	9.000	GND	L1	10.1	10.8	46.0	
2.055550	27.1	100.0	9.000	GND	N	10.3	18.9	46.0	
3.746250	34.3	100.0	9.000	GND	L1	10.8	11.7	46.0	
11.987650	40.1	100.0	9.000	GND	L1	11.9	9.9	50.0	
19.749350	30.3	100.0	9.000	GND	N	12.2	19.7	50.0	



Cooking element #3

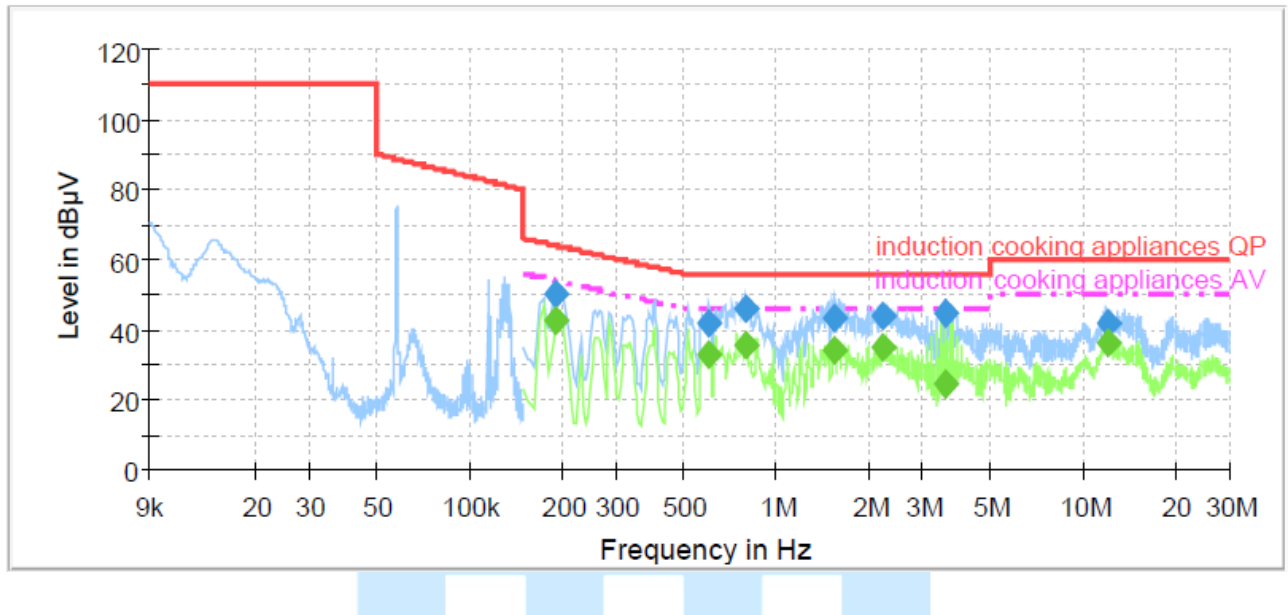

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.189250	50.6	100.0	9.000	GND	L1	10.0	13.5	64.1	
0.606950	42.1	100.0	9.000	GND	L1	10.1	13.9	56.0	
0.793950	45.8	100.0	9.000	GND	L1	10.1	10.2	56.0	
1.547050	43.6	100.0	9.000	GND	N	10.2	12.4	56.0	
2.234250	44.1	100.0	9.000	GND	L1	10.4	11.9	56.0	
3.549050	44.5	100.0	9.000	GND	L1	10.7	11.5	56.0	
12.118350	41.9	100.0	9.000	GND	L1	11.9	18.1	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.189250	42.6	100.0	9.000	GND	L1	10.0	11.5	54.1	
0.606950	33.0	100.0	9.000	GND	L1	10.1	13.0	46.0	
0.793950	35.5	100.0	9.000	GND	L1	10.1	10.5	46.0	
1.547050	33.9	100.0	9.000	GND	N	10.2	12.1	46.0	
2.234250	35.1	100.0	9.000	GND	L1	10.4	10.9	46.0	
3.549050	24.3	100.0	9.000	GND	L1	10.7	21.7	46.0	
12.118350	36.4	100.0	9.000	GND	L1	11.9	13.6	50.0	



Cooking element #4

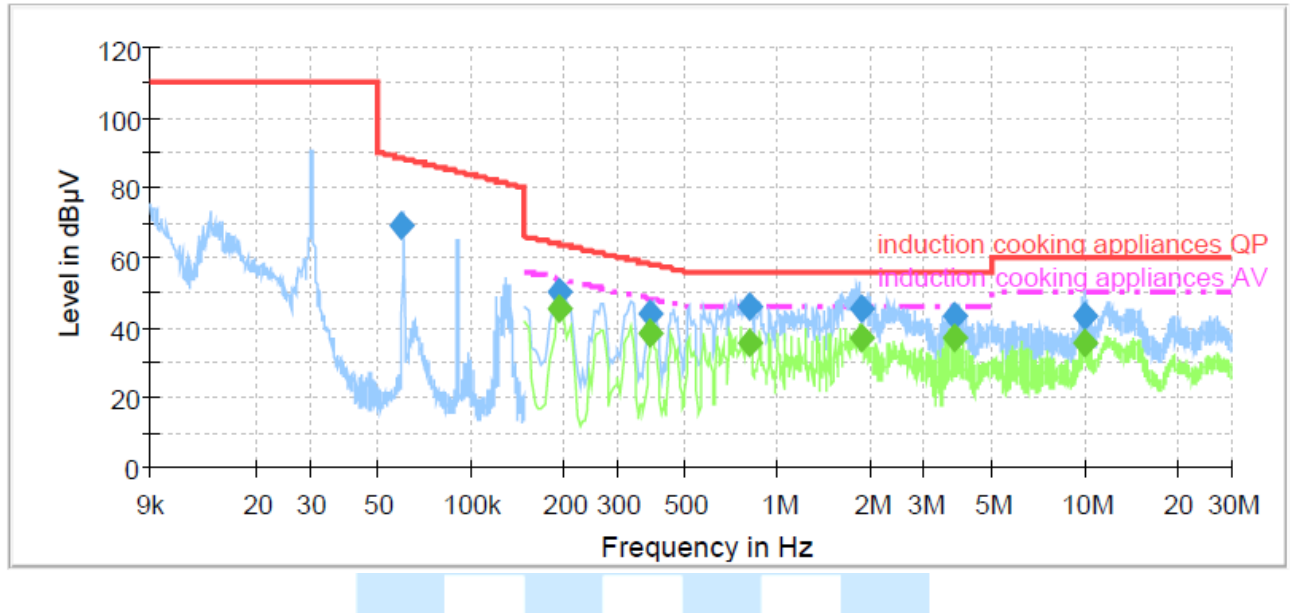

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.059261	69.1	1000.0	0.200	GND	N	10.0	19.4	88.5	
0.193050	50.3	100.0	9.000	GND	L1	10.0	13.6	63.9	
0.384150	43.8	100.0	9.000	GND	N	10.0	14.4	58.2	
0.809650	45.9	100.0	9.000	GND	L1	10.1	10.1	56.0	
1.880050	45.2	100.0	9.000	GND	L1	10.3	10.8	56.0	
3.753850	43.5	100.0	9.000	GND	L1	10.8	12.5	56.0	
10.056450	43.4	100.0	9.000	GND	L1	11.8	16.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.193050	45.5	100.0	9.000	GND	L1	10.0	8.4	53.9	
0.384150	38.3	100.0	9.000	GND	N	10.0	9.9	48.2	
0.809650	35.7	100.0	9.000	GND	L1	10.1	10.3	46.0	
1.880050	37.2	100.0	9.000	GND	L1	10.3	8.8	46.0	
3.753850	37.0	100.0	9.000	GND	L1	10.8	9.0	46.0	
10.056450	35.7	100.0	9.000	GND	L1	11.8	14.3	50.0	



6. Radiated Emission

6.1 Operating Environment

Temperature : 20.1 °C
Relative Humidity : 52.9 % R.H.

6.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16/ANSI C63.4.

The frequency range of 9 kHz to 30 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

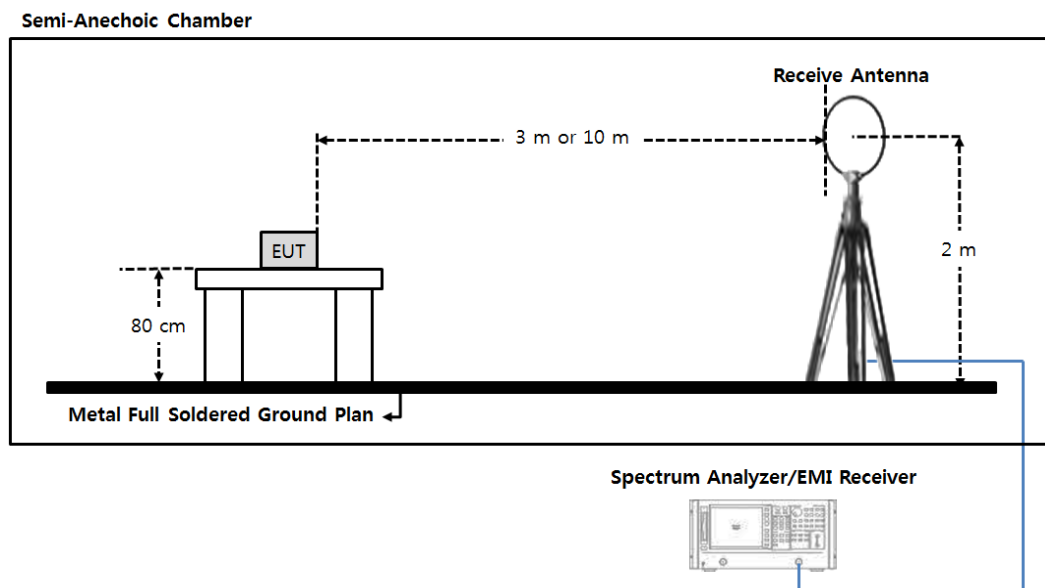


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)

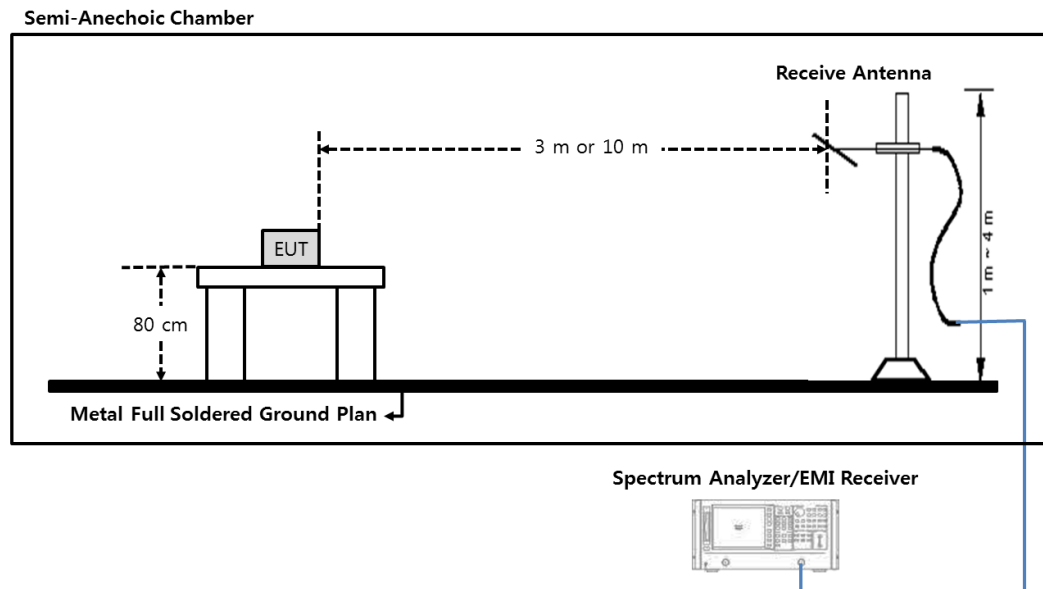


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.66 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.65 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	4.91 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	4.88 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	5.32 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 18 000 MHz, 3 m)	5.45 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



6.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (2)	1,600 (2)
Medical diathermy	Any ISM frequency	Any	25	300
	Any non-ISM frequency	Any	15	300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/F(\text{kHz})$ 15	30 30
<u>Induction cooking ranges</u>	<u>Below 90 kHz</u> On or above 90 kHz	<u>Any</u> Any	<u>1,500</u> 300	<u>⁴30</u> ⁴ 30

Note.

- 1) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 18, 2017
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Dec. 21, 2017
■ - CO3000	Innco system GmbH	Position Controller	CO03000/779/ 33050314/L	N/A
■ - DT3000	Innco system GmbH	Turntable	1280314	N/A
□ - MA4000-EP	Innco system GmbH	Antenna Mast	4420314	N/A

All test equipment used is calibrated on a regular basis.



6.6 Test data for Radiated Emission

- Test Date : July. 12, 2016
- Measurement Distance : 10 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

-. Measurement setting

Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Average	Average
Resolution bandwidth	200 Hz	9 kHz

-. Measurement Data: Induction mode

Note.2	Frequency [MHz]	Detector mode	ANT Pol.	Reading [dBuV]	D.C.F	Field Strength [dBuV/m]	Limits [dBuV/m]	Margin [dB]	Cooking element
S	0.052	Average	V1	72.63	19.08	53.55	63.52	9.97	1
S	0.059	Average	V1	79.51	19.08	60.43	63.52	3.09	2
S	0.057	Average	V1	73.37	19.08	54.29	63.52	9.23	3
F	0.03	Average	V1	70.09	19.08	51.01	63.52	12.51	4
S	0.06	Average	V1	52.11	19.08	33.03	63.52	30.49	4
S	0.089	Average	V1	51.36	19.08	32.28	63.52	31.24	4

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 “F”=Fundamental / “S”=Spurious / “*” = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a peak detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F.)

For 30 m: $40\log(30/10) = 19.08$ dB

Note.5 Sample calculation

Field Strength = Reading – D.C.F

Margin = Limit – Field Strength

Where, D.C.F = Distance Correction Factor

Note.6 “V1”= Vertical and perpendicular to the centerline / “V2”=vertical and parallel to the centerline

“H” = horizontal (parallel to the ground)

Note.7 cooking element “1”= left front ,”2”=left rear, “3”=center rear, “4”=right front



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB

8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. Electric Range (Model Name: LSE4617ST)** was complies with §18.305 and 18.307 of the FCC Rules.

- The end -