

SPECIFICATIONS

PRODUCT NAME : 2.4GHz Zigbee Module

MODEL NAME : ETWZBSUC01

The information contained herein is the exclusive property of LG Innotek and shall not be distributed, reproduced or disclosed in whole or no in part without prior written permission of LG Innotek.

Designed	Checked	Approved	LG Innotek Co., Ltd.	
S.J.Han				
2022.09.28	-		DOCUMENT No.	2022RF-ANT-05
			PAGE	7



REG. DATE : 2022.09.28

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2022.09.28

MODEL NAME : ETWZBSUC01 (LGIT)

PAGE : 1 / 7

Change History of Revision

Revision	Date	Contents of Revision Change	Remark
1.0	2022.09.28	Zigbee ANT Spec	S.J.Han



REG. DATE : 2022.09.28

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2022.09.28

MODEL NAME : ETWZBSUC01 (LGIT)

PAGE : 2 / 7

Table of Contents

No	Description	Page
1	ANT Features	3
2	Antenna Characteristics	3
	2.1 Network Data	4
	2.2 Efficiency	5
	2.3 Radiation Pattern	6
3	ANT Test Condition	6
4	ANT Dimension	7

REG. DATE : 2022.09.28

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2022.09.28

MODEL NAME : ETWZBSUC01 (LGIT)

PAGE : 3 / 7

1. ANT Features

- Zigbee ANT
- Main Frequency: 2.45GHz
- Frequency range
- : From 2.405 to 2.480 GHz
- Operating temperature range
- : 0 to +60°C

2. Antenna Characteristics

Built-in performance					
Parameter		Min	Typ	Max	Unit
Frequency Range		2.405	2.45	2.480	GHz
Directivity		-	Omni	-	-
2.45GHz	Average Gain	-	-1.02	-	dBi
	Peak Gain	-	-	1.46	
V.S.W.R		-	-	3.0:1	Under
Impedance			50		Ohm
Radiation Material			PCB Printed PIFA type		

REG. DATE : 2022.09.28


SPECIFICATION

REV.NO : 1.0

REV. DATE : 2022.09.28

MODEL NAME : ETWZBSUC01 (LGIT)

PAGE : 4 / 7

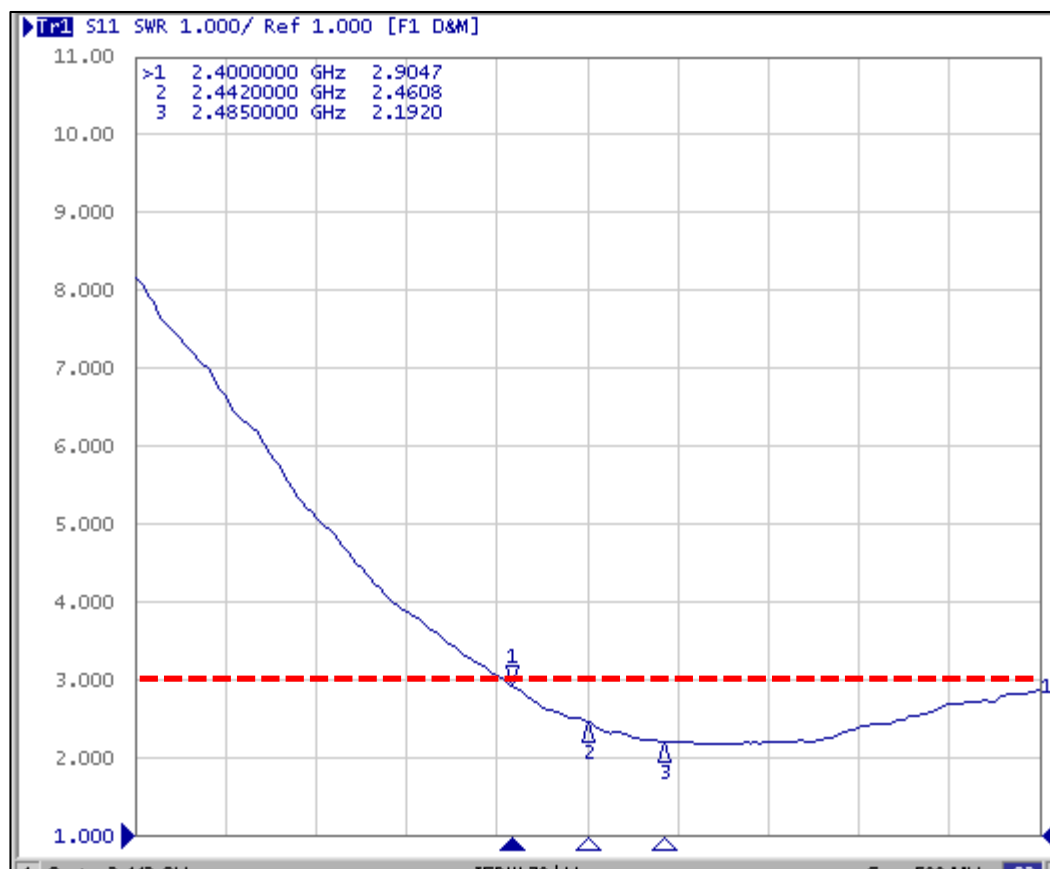2.1 Network Data**VSWR**

REG. DATE : 2022.09.28

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2022.09.28

MODEL NAME : ETWZBSUC01 (LGIT)

PAGE : 5 / 7

2.2. Efficiency

	1	2	3	4	5	6	7	8	9	10
Frequency(MHz)	2412	2420	2430	2440	2445	2450	2460	2470	2480	2485
Efficiency(dB)	-1.15	-1.13	-1.04	-0.95	-0.92	-1.02	-1.01	-0.91	-1.01	-1.08
Efficiency(%)	76.79	77.14	78.69	80.30	80.87	78.98	79.24	81.12	79.30	77.97
TRG(dB)	-1.15	-1.13	-1.04	-0.95	-0.92	-1.02	-1.01	-0.91	-1.01	-1.08
TRG_{Theta}(dB)	-3.26	-3.30	-3.36	-3.29	-3.26	-3.44	-3.46	-3.35	-3.47	-3.49
TRG_{Phi}(dB)	-5.29	-5.18	-4.87	-4.75	-4.73	-4.72	-4.67	-4.57	-4.64	-4.79
UHRG(dB)	-3.67	-3.63	-3.55	-3.41	-3.41	-3.44	-3.47	-3.37	-3.47	-3.56
UHRG/TRG(%)	56.00	56.23	56.07	56.78	56.42	57.30	56.79	56.77	56.74	56.51
H-Plane	-2.99	-2.83	-2.83	-2.84	-2.67	-3.19	-3.12	-2.92	-3.34	-3.18
E1-Plane, AVG(dB)	-5.56	-5.79	-5.87	-5.98	-5.98	-6.18	-6.20	-6.26	-6.48	-6.56
E2-Plane, AVG(dB)	-2.37	-2.36	-2.59	-2.47	-2.45	-2.33	-2.23	-2.24	-2.37	-2.47
Peak Gain(dB)	1.46	1.46	1.45	1.45	1.35	1.45	1.41	1.39	1.46	1.32
Directivity(dB)	2.61	2.58	2.49	2.41	2.27	2.48	2.42	2.29	2.47	2.40
Minimum Gain(dB)	-6.30	-6.54	-6.44	-6.30	-6.08	-6.08	-5.63	-5.58	-5.89	-6.06
Test Condition	FS									
Antenna Type										

Average Efficiency	-1.02 dB,	79.04 %
---------------------------	------------------	----------------

REG. DATE : 2022.09.28

SPECIFICATION


REV.NO : 1.0

REV. DATE : 2022.09.28

MODEL NAME : ETWZBSUC01 (LGIT)

PAGE : 6 / 7

2.3. Radiation Pattern

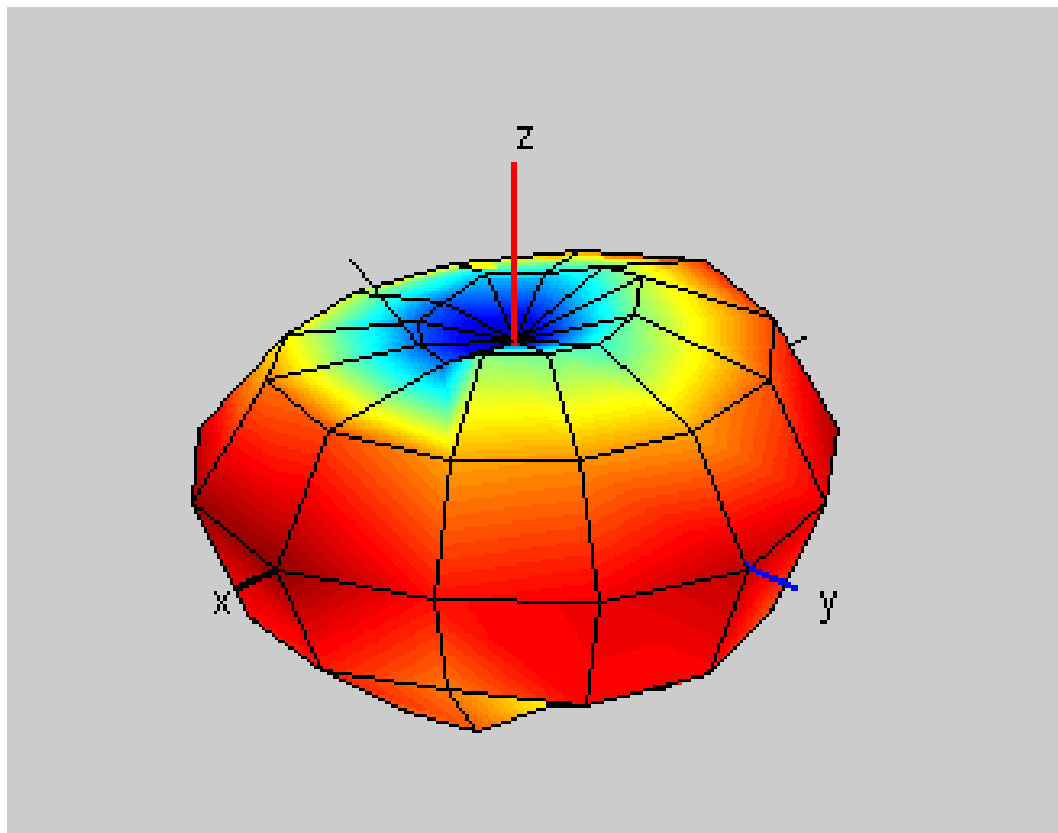

3. ANT Test Condition

CTIA-OTA Test Chamber : 3x6x3m

