

SAR TEST REPORT

HCT CO., LTD

EUT Type:	Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth GPRS Class12 and GPRS mode class B(GPRS and GSM, but not simultaneously)		
FCC ID:	BEJT320G	IC :	2703C-T320G
Model:	LG-T320g	IC Model:	T320g, LG-T320g
Additional Model:	T320g, T320gv, LG-T320gv		
Date of Issue:	Sep. 7, 2010		
Test report No.:	HCTA1009FS01		
Test Laboratory:	HCT CO., LTD. SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA TEL: +82 31 639 8565 FAX: +82 31 639 8525		
Applicant :	LG Electronics, Inc. 60-39, Gasan-Dong, Gumchon-Gu, Seoul 153-023, Korea Tel: +82-2-2033-1113 Fax: +82-2-2033-1222		
Testing has been carried out in accordance with:	RSS-102 Issue 4; Health Canada Safety Code 6 47CFR §2.1093 FCC OET Bulletin 65(Edition 97-01), Supplement C (Edition 01-01) ANSI/ IEEE C95.1 – 2005 IEEE 1528-2003		
Test result:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Signature	 Report prepared by : Young-Soo Jang Test Engineer of SAR Part  Approved by : Jae-Sang So Manager of SAR Part		

Table of Contents

<u>1. INTRODUCTION</u>	3
<u>2. DESCRIPTION OF DEVICE</u>	4
<u>3. DESCRIPTION OF TEST EQUIPMENT</u>	5
<u>3.1 SAR MEASUREMENT SETUP</u>	5
<u>3.3 PROBE CALIBRATION PROCESS</u>	7
<u>3.4 SAM Phantom</u>	9
<u>3.5 Device Holder for Transmitters</u>	9
<u>3.6 Brain & Muscle Simulating Mixture Characterization</u>	10
<u>3.7 SAR TEST EQUIPMENT</u>	11
<u>4. SAR MEASUREMENT PROCEDURE</u>	12
<u>5. DESCRIPTION OF TEST POSITION</u>	13
<u>5.1 HEAD POSITION</u>	13
<u>5.2 Body Holster/Belt Clip Configurations</u>	14
<u>6. MEASUREMENT UNCERTAINTY</u>	15
<u>7. ANSI/ IEEE C95.1 - 2005 RF EXPOSURE LIMITS</u>	16
<u>8. SYSTEM VERIFICATION</u>	17
<u>8.1 Tissue Verification</u>	17
<u>8.2 System Validation</u>	17
<u>9. RF CONDUCTED POWER</u>	18
<u>9.1 Procedures Used to Establish RF Signal for SAR</u>	18
<u>9.2 SAR Measurement Conditions for UMTS</u>	18
<u>10. SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas</u>	21
<u>11. SAR TEST DATA SUMMARY</u>	22
<u>11.1 Measurement Results (GSM850 Head SAR Touch)</u>	22
<u>11.2 Measurement Results (GSM850 Head SAR Tilt)</u>	23
<u>11.3 Measurement Results (GSM1900 Head SAR Touch)</u>	24
<u>11.4 Measurement Results (GSM1900 Head SAR Tilt)</u>	25
<u>11.5 Measurement Results (WCDMA850 Head SAR Touch)</u>	26
<u>11.6 Measurement Results (WCDMA850 Head SAR Tilt)</u>	27
<u>11.7 Measurement Results (WCDMA1900 Head SAR Touch)</u>	28
<u>11.8 Measurement Results (WCDMA1900 Head SAR Tilt)</u>	29
<u>11.9 Measurement Results (GSM850 Body SAR)</u>	30
<u>11.10 Measurement Results (GSM1900 Body SAR)</u>	31
<u>11.11 Measurement Results (WCDMA850 Body SAR)</u>	32
<u>11.12 Measurement Results (WCDMA1900 Body SAR)</u>	33
<u>12. CONCLUSION</u>	34
<u>13. REFERENCES</u>	35
Attachment 1. – SAR Test Plots	36
Attachment 2. – Dipole Validation Plots	85
Attachment 3. – Probe Calibration Data	92
Attachment 4. – Dipole Calibration Data	104

1. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative of the incremental electromagnetic energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body.

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

where:

σ	=	conductivity of the tissue-simulant material (S/m)
ρ	=	mass density of the tissue-simulant material (kg/m ³)
E	=	Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

2. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

EUT Type	Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)		
FCC ID:	BEJT320G	IC:	2703C-T320G
Model:	LG-T320g	IC Model:	T320g, LG-T320g
Additional Model:	T320g, T320gv, LG-T320gv		
Trade Name	LG	Serial Number(s)	#1
Application Type	Certification		
Mode(s) of Operation	GSM850/GSM1900/WCDMA850/WCDMA1900		
Tx Frequency	824.20 - 848.80 MHz (GSM850) 1 850.20 – 1 909.80 MHz (GSM1900) 826.4~846.6 MHz (WCDMA850) 1 852.4 – 1 907.6 MHz (WCDMA1900)		
Rx Frequency	869.20 - 893.80 MHz (GSM850) 1 930.20 – 1 989.80 MHz (GSM1900) 871.4 - 891.6 MHz (WCDMA850) 1 932.4 – 1 987.6 MHz (WCDMA1900)		
FCC Classification	Licensed Portable Transmitter Held to Ear (PCE)		
Production Unit or Identical Prototype	Prototype		
Max SAR	0.957 W/kg GSM850 Head SAR / 0.788 W/kg GSM850 Body SAR 1.03 W/kg GSM1900 Head SAR / 0.398 W/kg GSM1900 Body SAR 0.485 W/kg WCDMA850 Head SAR / 0.325 W/kg WCDMA850 Body SAR 1.21 W/kg WCDMA1900 Head SAR / 0.265 W/kg WCDMA1900 Body SAR		
Date(s) of Tests	Aug. 15, 2010 ~ Aug. 16, 2010		
Antenna Type	Intenna		

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure.3.1).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Pentium IV 3.0 GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

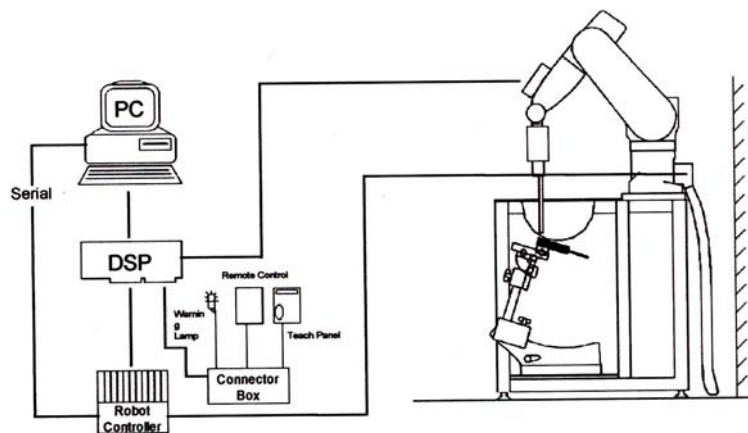


Figure 3.1 HCT SAR Lab. Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

3.2 DASY4 E-FIELD PROBE SYSTEM

3.2.1 ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at Frequencies of 450 MHz, 900 MHz and 1.8 GHz (accuracy: 8 %)
Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal probe axis)
Dynamic	5 μ W/g to > 100 mW/g;
Range Linearity:	± 0.2 dB
Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dissymmetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



Figure 3.2 Photograph of the probe and the Phantom

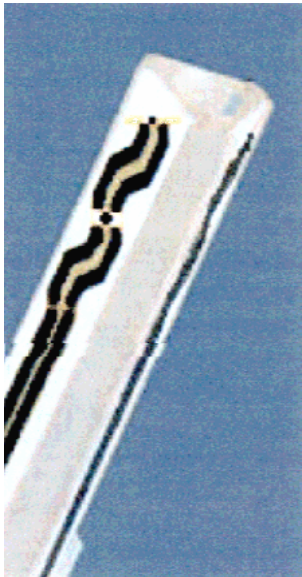


Figure 3.3 ET3DV6 E-field Probe

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches a maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

3.3 PROBE CALIBRATION PROCESS

3.3.1 E-Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with an accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the proper procedure and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

- Δt = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- σ = simulated tissue conductivity,
- ρ = Tissue density (1.25 g/cm³ for brain tissue)

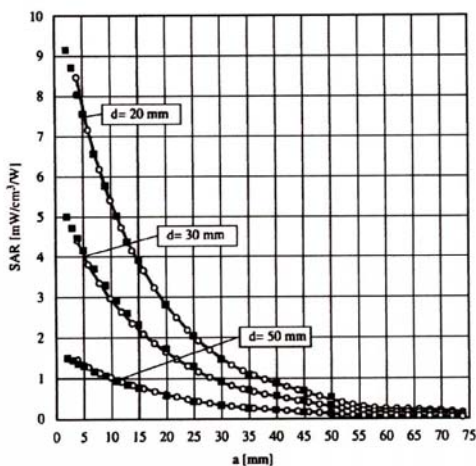


Figure 3.4 E-Field and Temperature measurements at 900 MHz

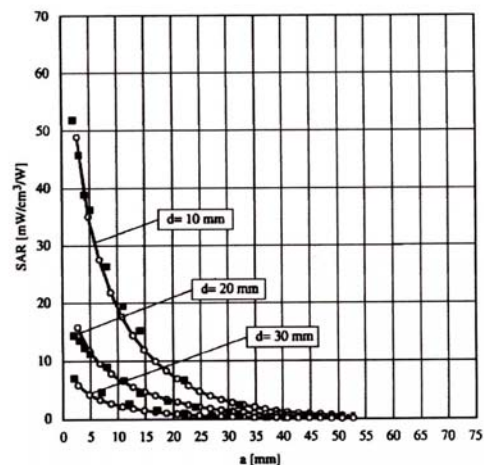


Figure 3.5 E-Field and temperature measurements at 1.8 GHz

3.3.2 Data Extrapolation

The DASY4 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

3.4 SAM Phantom

The SAM Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90 % of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

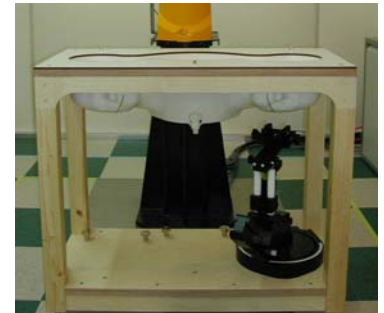


Figure 3.6 SAM Phantom

Shell Thickness	2.0 mm
Filling Volume	about 30 L
Dimensions	810 mm x 1 000 mm x 500 mm (H x L x W)

3.5 Device Holder for Transmitters

In combination with the SAM Phantom V 4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations. To produce the Worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.7 Device Holder

3.6 Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethyl cellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1 900		2 450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Table 3.1 Composition of the Tissue Equivalent Matter

3.7 SAR TEST EQUIPMENT

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
SPEAG	SAM Phantom	-	N/A	N/A	N/A
Staubli	Robot RX90L	F01/5K09A1/A/01	N/A	N/A	N/A
Staubli	Robot ControllerCS7MB	F99/5A82A1/C/01	N/A	N/A	N/A
HP	Pavilion t000_puffer	KRJ51201TV	N/A	N/A	N/A
SPEAG	Light Alignment Sensor	265	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick)	D221340.01	N/A	N/A	N/A
SPEAG	DAE3	466	July 21, 2010	Annual	July 21, 2011
SPEAG	E-Field Probe ET3DV6	1630	May 25, 2010	Annual	May 25, 2011
SPEAG	E-Field Probe ES3DV3	3161	Mar 22, 2010	Annual	Mar 22, 2011
SPEAG	Validation Dipole D450V2	1007	July 15, 2010	Biennial	July 15, 2012
SPEAG	Validation Dipole D835V2	441	May 21, 2010	Annual	May 21, 2011
SPEAG	Validation Dipole D1800V2	2d006	Apr. 20, 2010	Biennial	Apr. 20, 2012
SPEAG	Validation Dipole D1900V2	5d032	July 16, 2010	Annual	July 16, 2011
Agilent	Power Meter(F) E4419B	MY41291386	Nov. 05, 2009	Annual	Nov. 05, 2010
Agilent	Power Sensor(G) 8481	MY41090870	Nov. 05, 2009	Annual	Nov. 05, 2010
HP	Dielectric Probe Kit 85070C	00721521	N/A	N/A	N/A
HP	Dual Directional Coupler	16072	Nov. 05, 2009	Annual	Nov. 05, 2010
R&S	Base Station CMU200	110740	July 26, 2010	Annual	July 26, 2011
Agilent	Base Station E5515C	GB44400269	Feb. 10, 2010	Annual	Feb. 10, 2011
HP	Signal Generator E4438C	MY42082646	Dec. 24, 2009	Annual	Dec. 24, 2010
HP	Network Analyzer 8753C	3310J01394	Dec. 04, 2009	Annual	Dec. 04, 2010

NOTE:

The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by HCT Lab. before each test. The brain simulating material is calibrated by HCT using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

4. SAR MEASUREMENT PROCEDURE

The evaluation was performed with the following procedure:

1. The SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.
2. The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.
3. Around this point, a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR value, at the same location as procedure #1, was re-measured. If the value changed by more than 5 %, the evaluation is repeated.

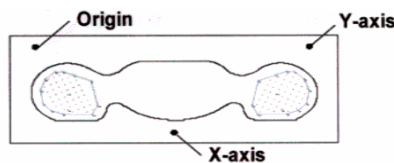


Figure 4.1 SAR Measurement Point in Area Scan

5. DESCRIPTION OF TEST POSITION

5.1 HEAD POSITION

The device was placed in a normal operating position with the Point A on the device, as illustrated in following drawing, aligned with the location of the RE(ERP) on the phantom. With the ear-piece pressed against the head, the vertical center line of the body of the handset was aligned with an imaginary plane consisting of the RE, LE and M. While maintaining these alignments, the body of the handset was gradually moved towards the cheek until any point on the mouth-piece or keypad contacted the cheek. This is a cheek/touch position. For ear/tilt position, while maintain the device aligned with the BM and FN lines, the device was pivot against ERP back for 15° or until the device antenna touch the phantom. Please refer to IEEE 1528-2003 illustration below.

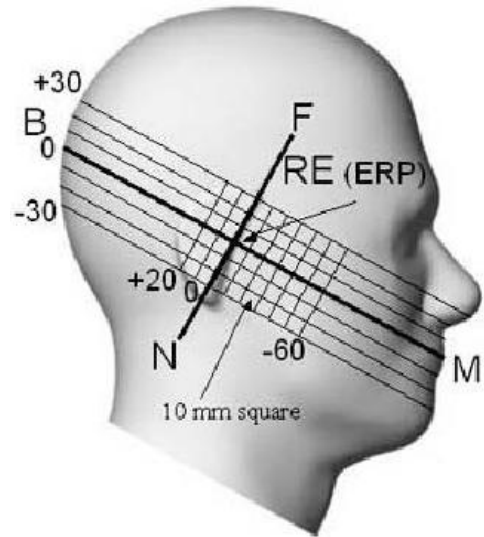


Figure 5.1 Side view of the phantom

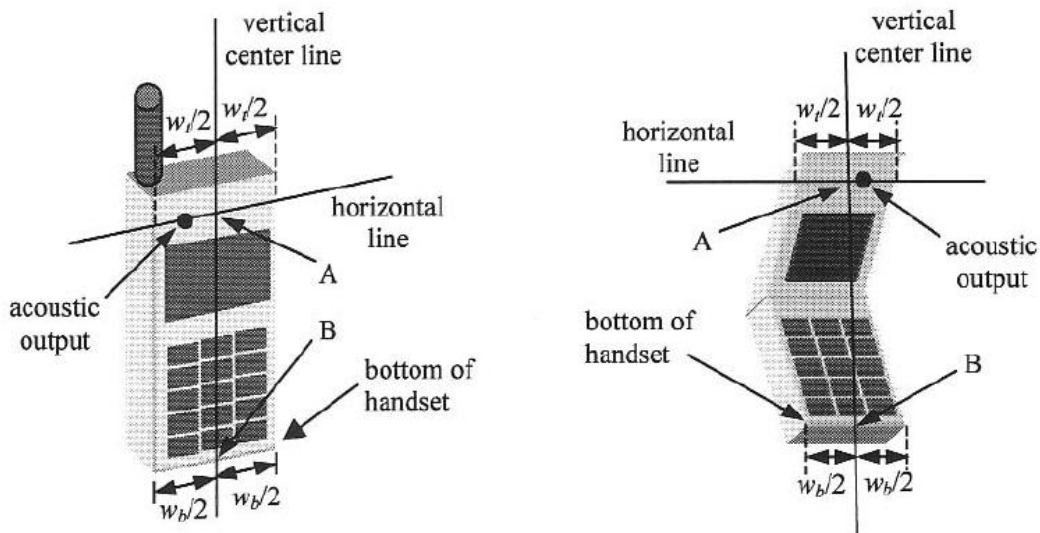


Figure 5.2 Handset vertical and horizontal reference lines

5.2 Body Holster/Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with each accessory. If multiple accessory share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some Devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used.

Since this EUT does not supply any body worn accessory to the end user a distance of 2.0 cm from the EUT back surface to the liquid interface is configured for the generic test.

"See the Test SET-UP Photo"

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worstcase positioning is then documented and used to perform Body SAR testing.

6. MEASUREMENT UNCERTAINTY

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than 15 % - 25 %.

According to ANSI/IEEE C95.3, the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of 1 dB to ± 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC, typical worst-case uncertainty of field measurements is 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

Uncertainty Budegt										
Frequency (MHz)	Error Description	Tol (± %)	Prob. dist.	Div.	c _i	Standard Uncertainty (± %)	v _{eff}	Combined Uncertainty (± %)	k	Expanded STD Uncertainty (± %)
	1. Measurement System									
	Probe Calibration	5.50	N	1	1	5.50	∞			
	Axial Isotropy	4.70	R	1.73	0.7	1.90	∞			
	Hemispherical Isotropy	9.60	R	1.73	0.7	3.88	∞			
	Boundary Effects	1.00	R	1.73	1	0.58	∞			
	Linearity	4.70	R	1.73	1	2.71	∞			
	System Detection Limits	1.00	R	1.73	1	0.58	∞			
	Readout Electronics	0.30	N	1.00	1	0.30	∞			
	Response Time	0.8	R	1.73	1	0.46	∞			
	Integration Time	2.6	R	1.73	1	1.50	∞			
	RF Ambient Noise	3.00	R	1.73	1	1.73	∞			
	RF Ambient Reflection	3.00	R	1.73	1	1.73	∞			
	Probe Positioner	0.40	R	1.73	1	0.23	∞			
	Probe Positioning	2.90	R	1.73	1	1.67	∞			
	Max SAR Eval	1.00	R	1.73	1	0.58	∞			
	2.Test Sample Related									
	Device Positioning	1.80	N	1.00	1	1.80	9			
	Device Holder	3.60	N	1.00	1	3.60	5			
	Power Drift	5.00	R	1.73	1	2.89	∞			
	3.Phantom and Setup									
	Phantom Uncertainty	4.00	R	1.73	1	2.31	∞			
	Liquid Conductivity(target)	5.00	R	1.73	0.64	1.85	∞			
	Liquid Permutivity(target)	5.00	R	1.73	0.60	1.73	∞			
835 (Head)	Liquid Permutivity(meas.)	3.78	N	1	0.60	2.27	∞	10.50	2	21.00
	Liquid Conductivity(meas.)	0.24	N	1	0.64	0.15	∞			
835 (Body)	Liquid Permutivity(meas.)	2.27	N	1	0.60	1.36	∞	10.43	2	20.86
	Liquid Conductivity(meas.)	2.17	N	1	0.64	1.39	∞			
1900 (Head)	Liquid Permutivity(meas.)	0.00	N	1	0.60	0.00	∞	10.33	2	20.66
	Liquid Conductivity(meas.)	2.00	N	1	0.64	1.28	∞			
1900 (Body)	Liquid Permutivity(meas.)	2.63	N	1	0.60	1.58	∞	10.38	2	20.75
	Liquid Conductivity(meas.)	0.54	N	1	0.64	0.35	∞			

Table 6.1 Breakdown of Errors

7. ANSI/ IEEE C95.1 - 2005 RF EXPOSURE LIMITS

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 7.1 Safety Limits for Partial Body Exposure

NOTES:

* The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole-body.

*** The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. SYSTEM VERIFICATION

8.1 Tissue Verification

Freq. [MHz]	Date	Liquid	Liquid Temp.[°C]	Parameters	Target Value	Measured Value	Deviation [%]	Limit [%]
835	Aug. 15, 2010	Head	21.2	ϵ_r	41.5	41.6	+ 0.24	± 5
				σ	0.90	0.866	- 3.78	± 5
835	Aug. 15, 2010	Body	21.2	ϵ_r	55.2	56.4	+ 2.17	± 5
				σ	0.97	0.948	- 2.27	± 5
1 900	Aug. 16, 2010	Head	21.3	ϵ_r	40.0	40.8	+ 2.00	± 5
				σ	1.40	1.4	0.00	± 5
1 900	Aug. 16, 2010	Body	21.3	ϵ_r	53.3	53.59	+ 0.54	± 5
				σ	1.52	1.48	- 2.63	± 5

8.2 System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835 MHz / 1 900 MHz by using the system validation kit. (Graphic Plots Attached)

* Input Power: 100 m W

Freq. [MHz]	Date	Liquid	Liquid Temp. [°C]	SAR Average	Target Value (SPEAG) (mW/g)	*Measured Value (mW/g)	Deviation [%]	Limit [%]
835	Aug. 15, 2010	Head	21.2	1 g	9.66	0.998	+ 3.31	± 10
1 900	Aug. 16, 2010	Head	21.3	1 g	39.9	4.08	+ 2.26	± 10

9. RF CONDUCTED POWER

Power measurements were performed using a base station simulator under digital average power

9.1 Procedures Used to Establish RF Signal for SAR

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluation SAR[4] SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted Power deviations of more than 5 % occurred, the tests were repeated.

9.2 SAR Measurement Conditions for UMTS

Body SAR is not required for handsets with HSDPA capabilities when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is Measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

9.2.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3 GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all "1s"

9.2.2 Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

9.2.3 Body SAR Measurement

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

9.2.4 Handsets with Release 5 HSDPA

Body SAR is not required for handsets with HSDPA capabilities when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is Measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

Sub-Test 1 Setup for Release 5 HSDPA

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

9.2.5 Handsets with Release 6 HSPA (HSDPA/HSUPA)

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is ≤ 75 % of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.1 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurement should be used to test for head exposure.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Band	Channel	Voice	GPRS Data				EDGE Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)	EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	32.84	32.84	30.94	28.94	26.93	26.55	25.10	23.28	21.62
	190	32.70	32.69	30.81	28.81	26.81	26.55	25.05	23.22	21.56
	251	32.60	32.59	30.71	28.69	26.69	26.55	25.02	23.04	21.38
GSM 1900	512	29.28	29.28	27.84	27.76	25.64	25.11	23.38	21.8	22.2
	661	29.06	29.06	27.61	27.56	25.44	24.94	23.29	21.71	22.13
	810	29.05	29.04	27.56	27.51	25.39	25.00	23.30	21.80	22.10

Table 10.1 GSM Conducted output powers

			850 MHz (V)			1900 MHz (II)		
3GPP Release version	Mode	3GPP 34.121 Sutest	[dBm]			[dBm]		
			4132	4183	4233	9262	9400	9538
99	WCDMA	12.2kbps (RMC)	23.17	23.15	22.87	22.27	22.30	22.50
5	HSDPA	Subtest1	23.17	23.12	22.74	22.26	22.28	22.49
5		Subtest2	22.94	23.07	22.59	22.25	22.26	22.47
5		Subtest3	22.82	23.01	22.60	22.01	22.11	22.35
5		Subtest4	22.02	22.05	21.66	21.30	21.25	22.10

Table 10.2 WCDMA Conducted output powers

10. SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas

10.1 SAR Evaluation Considerations

These procedures were followed according to FCC "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", May 2008. The procedures are applicable to phones with built-in unlicensed transmitters, such as 802.11 a/b/g and Bluetooth devices.

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P_{Ref}	12	6	5	mW

Device output power should be rounded to the nearest mW to compare with values specified in this

Table. 11.1 Output Power Thresholds for Unlicensed Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: <u>Unlicensed only</u> - when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas <u>Licensed & Unlicensed</u> - when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas - when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: <u>Licensed & Unlicensed</u> antenna pairs with SAR to peak location separation ratio ≥ 0.3 ; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	<u>When there is no simultaneous transmission –</u> - output ≤ 60 f: SAR not required - output > 60 f: stand-alone SAR required <u>When there is simultaneous transmission –</u> <u>Stand-alone SAR not required when</u> - output $\leq 2 \cdot P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas - output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas - output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> <u>When stand-alone SAR is required</u> - test SAR on highest output channel for each wireless mode and exposure condition - if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures	
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> - when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues - position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Table. 11.2 SAR Evaluation Requirements for Cellphones with Multiple Transmitters

FCC ID: BEJT320G

BT Max. RF output power: 3.46 dBm (2.22 mW)

Antenna separation distance between Main and BT: 7.5 cm

Because the conducted output power level of the BT transmitter is less than $2 \cdot P_{ref}$, and the BT antenna is more than 5.0 cm from the Main antenna, neither simultaneous SAR nor stand-alone BT SAR are required for the EUT.

11. SAR TEST DATA SUMMARY

11.1 Measurement Results (GSM850 Head SAR Touch)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
824.2	128 (Low)	GSM850	32.84	32.69	Standard	Left Ear	Intenna	0.537
836.6	190 (Mid)	GSM850	32.70	32.68	Standard	Left Ear	Intenna	0.834
848.8	251 (High)	GSM850	32.60	32.70	Standard	Left Ear	Intenna	0.957
836.6	190 (Mid)	GSM850	32.70	32.74	Standard	Right Ear	Intenna	0.585
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm $\pm$ 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

11.2 Measurement Results (GSM850 Head SAR Tilt)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
836.6	190 (Mid)	GSM850	32.70	32.78	Standard	Left Tilt 15°	Intenna	0.378
836.6	190 (Mid)	GSM850	32.70	32.65	Standard	Right Tilt 15°	Intenna	0.330
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

11.3 Measurement Results (GSM1900 Head SAR Touch)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
1 880.0	661 (Mid)	GSM1900	29.06	29.04	Standard	Left Ear	Intenna	0.626
1 850.2	512 (Low)	GSM1900	29.28	29.05	Standard	Right Ear	Intenna	0.877
1 880.0	661 (Mid)	GSM1900	29.06	29.15	Standard	Right Ear	Intenna	1.03
1 909.8	810 (High)	GSM1900	29.05	29.16	Standard	Right Ear	Intenna	0.893
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm $\pm$ 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

11.4 Measurement Results (GSM1900 Head SAR Tilt)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
1 880.0	661 (Mid)	GSM1900	24.94	24.91	Standard	Left Tilt 15°	Intenna	0.422
1 880.0	661 (Mid)	GSM1900	24.94	24.98	Standard	Right Tilt 15°	Intenna	0.432
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

11.5 Measurement Results (WCDMA850 Head SAR Touch)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
836.6	4183 (Mid)	WCDMA850	23.15	23.20	Standard	Left Ear	Intenna	0.485
836.6	4183 (Mid)	WCDMA850	23.15	23.19	Standard	Right Ear	Intenna	0.376
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm $\pm$ 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.

11.6 Measurement Results (WCDMA850 Head SAR Tilt)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
836.6	4183 (Mid)	WCDMA850	23.15	23.19	Standard	Left Tilt 15°	Intenna	0.226
836.6	4183 (Mid)	WCDMA850	23.15	23.13	Standard	Right Tilt 15°	Intenna	0.206
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.

11.7 Measurement Results (WCDMA1900 Head SAR Touch)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
1 852.4	9262 (Low)	WCDMA1900	22.27	22.30	Standard	Left Ear	Intenna	1.00
1 880.0	9400 (Mid)	WCDMA1900	22.30	22.42	Standard	Left Ear	Intenna	0.998
1 907.6	9538 (High)	WCDMA1900	22.50	22.45	Standard	Left Ear	Intenna	0.872
1 852.4	9262 (Low)	WCDMA1900	22.27	22.30	Standard	Right Ear	Intenna	1.21
1 880.0	9400 (Mid)	WCDMA1900	22.30	22.45	Standard	Right Ear	Intenna	1.20
1 907.6	9538 (High)	WCDMA1900	22.50	22.40	Standard	Right Ear	Intenna	0.984
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm $\pm$ 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.

11.8 Measurement Results (WCDMA1900 Head SAR Tilt)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
1 880.0	9400 (Mid)	WCDMA1900	22.30	22.31	Standard	Left Tilt 15°	Intenna	0.537
1 880.0	9400 (Mid)	WCDMA1900	22.30	22.42	Standard	Right Tilt 15°	Intenna	0.721
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.

11.9 Measurement Results (GSM850 Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Configuration	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
836.6	190 (Mid)	GPRS 1Tx	32.69	32.70	Rear	2.0 cm without Holster	Intenna	0.446
836.6	190 (Mid)	GPRS 2Tx	30.81	30.80	Rear	2.0 cm without Holster	Intenna	0.763
836.6	190 (Mid)	GPRS 3Tx	28.81	28.92	Rear	2.0 cm without Holster	Intenna	0.788
836.6	190 (Mid)	GPRS 4Tx	26.81	26.94	Rear	2.0 cm without Holster	Intenna	0.653
836.6	190 (Mid)	GSM	32.70	32.75	Rear	2.0 cm without Holster	Intenna	0.529
836.6	190 (Mid)	GPRS 3Tx	28.81	28.88	Front	2.0 cm without Holster	Intenna	0.564
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Both side of the phone were tested and the worst-case side is reported.
- Test Configuration ☐ With Holster ☒ Without Holster
- HEADSET was connected.
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

11.10 Measurement Results (GSM1900 Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Configuration	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
1 880.0	661 (Mid)	GPRS 1Tx	29.06	29.05	Rear	2.0 cm without Holster	Intenna	0.194
1 880.0	661 (Mid)	GPRS 2Tx	27.61	27.58	Rear	2.0 cm without Holster	Intenna	0.273
1 880.0	661 (Mid)	GPRS 3Tx	27.56	27.58	Rear	2.0 cm without Holster	Intenna	0.398
1 880.0	661 (Mid)	GPRS 4Tx	25.44	25.50	Rear	2.0 cm without Holster	Intenna	0.327
1 880.0	661 (Mid)	GSM	29.06	29.01	Rear	2.0 cm without Holster	Intenna	0.132
1 880.0	661 (Mid)	GPRS 3Tx	27.56	27.58	Front	2.0 cm without Holster	Intenna	0.352
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Both side of the phone were tested and the worst-case side is reported.
- Test Configuration ☐ With Holster ☒ Without Holster
- HEADSET was connected.
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

11.11 Measurement Results (WCDMA850 Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Configuration	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
836.6	4183 (Mid)	WCDMA850	23.15	23.09	Rear	2.0 cm without Holster	Intenna	0.325
836.6	4183 (Mid)	WCDMA850	23.15	23.18	Front	2.0 cm without Holster	Intenna	0.210
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram		

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm $\pm$ 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Both side of the phone were tested and the worst-case side is reported.
- HEADSET was connected.
- Test Configuration ☐ With Holster ☒ Without Holster
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.

11.12 Measurement Results (WCDMA1900 Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Configuration	Phantom Position	Antenna Type	SAR(mW/g)
MHz	Channel		Begin	End				
1 880.0	9400 (Mid)	WCDMA1900	22.30	22.35	Rear	2.0 cm without Holster	Intenna	0.265
1 880.0	9400 (Mid)	WCDMA1900	22.30	22.41	Front	2.0 cm without Holster	Intenna	0.249
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram		

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- All modes of operation were investigated and the worst-case are reported.
- Measured Depth of Simulating Tissue is 15.0 cm $\pm$ 0.2 cm.
- Tissue parameters and temperatures are listed on the SAR plot.
- Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- Both side of the phone were tested and the worst-case side is reported.
- HEADSET was connected.
- Test Configuration ☐ With Holster ☒ Without Holster
- Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.

12. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/IEEE C95.1 2005.

These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests.

13. REFERENCES

- [1] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields, July 2001.
- [2] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, IEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices.
- [3] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [4] ANSI/IEEE C95.1 - 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 100 GHz, New York: IEEE, Aug. 1992
- [5] ANSI/IEEE C95.3 - 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Poković, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300 MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300 GHz, Jan. 1995.
- [20] Prof. Dr. Niels Kuster, ETH, EidgenØssische Technische Hoschschule ZØrich, Dosimetric Evaluation of the Cellular Phone.
- [21] SAR Evaluation of Handsets with Multiple Transmitters and Antennas #648474.
- [22] SAR Measurement Procedure for 802.11 a/b/g Transmitters #KDB 248227.

Attachment 1. – SAR Test Plots

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 825$ MHz; $\sigma = 0.86$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 128/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.582 mW/g

Left touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.1 V/m; Power Drift = -0.156 dB
Peak SAR (extrapolated) = 0.672 W/kg
SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.384 mW/g
Maximum value of SAR (measured) = 0.573 mW/g

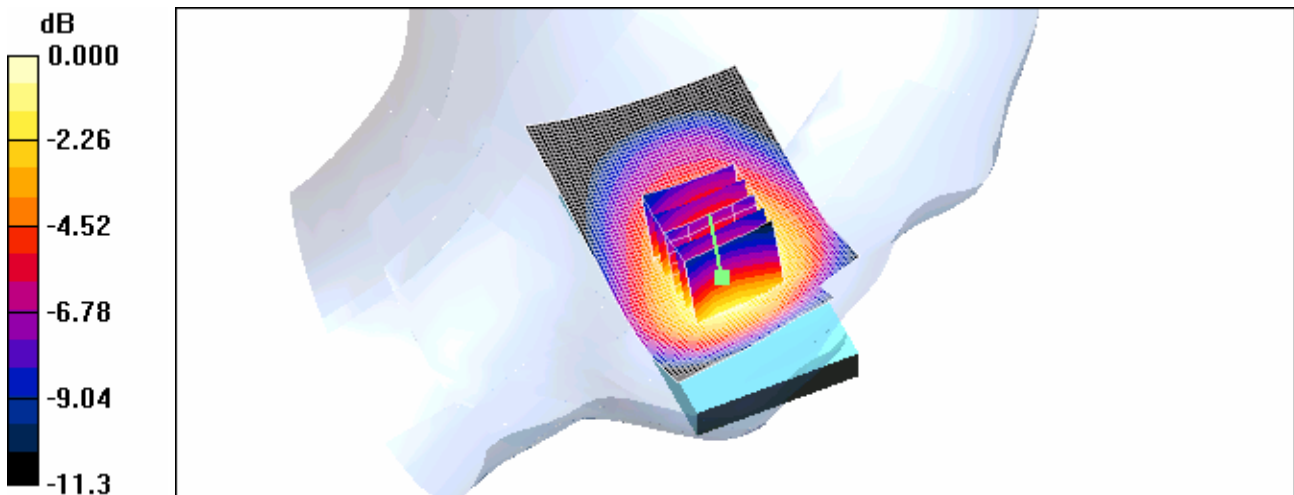

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.867$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 190/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.909 mW/g

Left touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.834 mW/g; SAR(10 g) = 0.595 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.893 mW/g

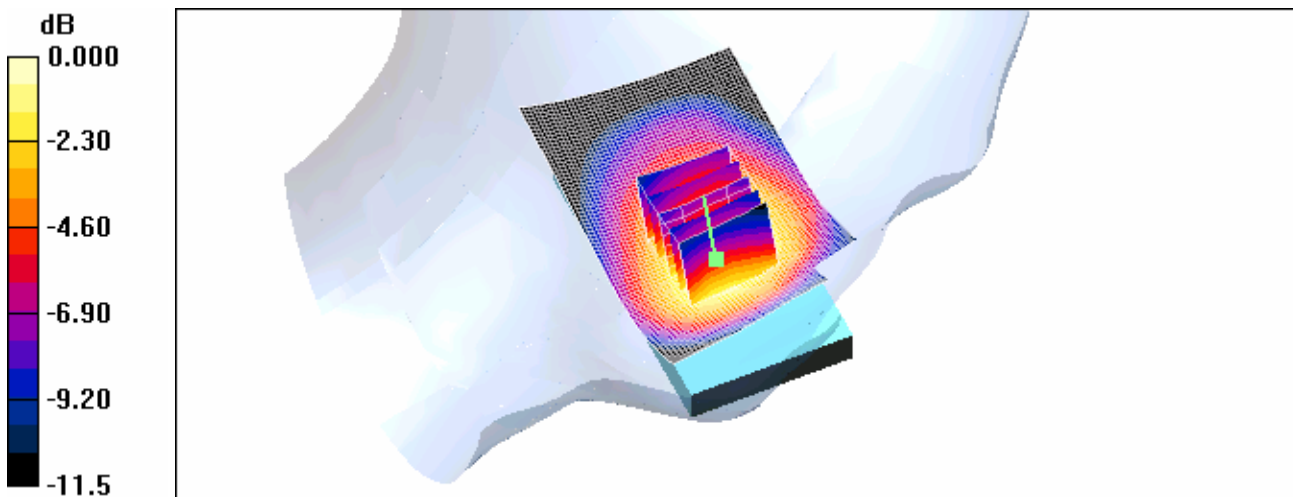

0 dB = 0.893mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.04 mW/g

Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.3 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.957 mW/g; SAR(10 g) = 0.687 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 mW/g

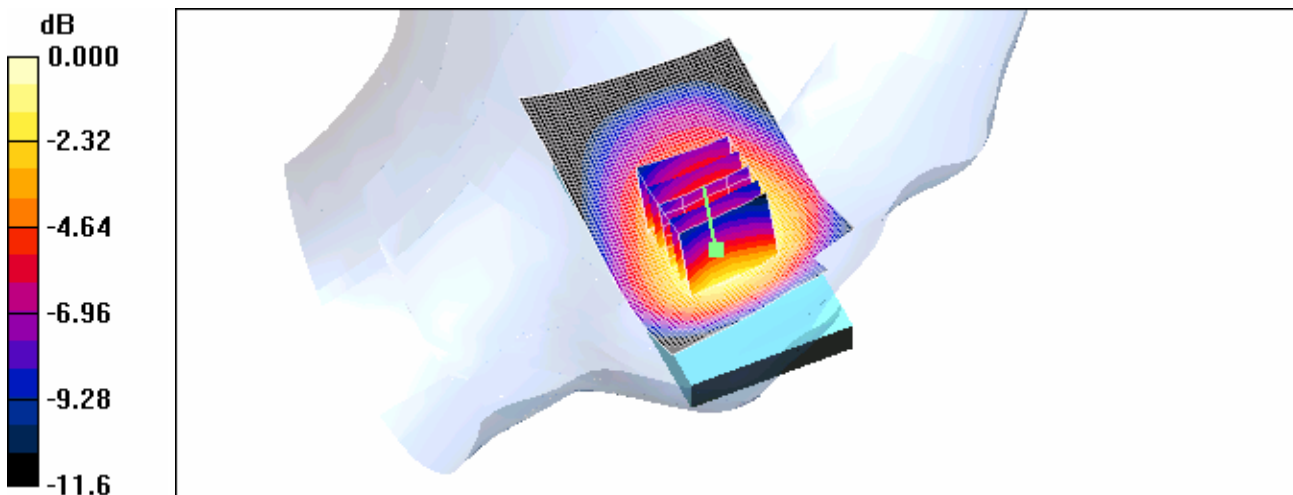

0 dB = 1.02mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.867$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.605 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.2 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.748 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.419 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.625 mW/g

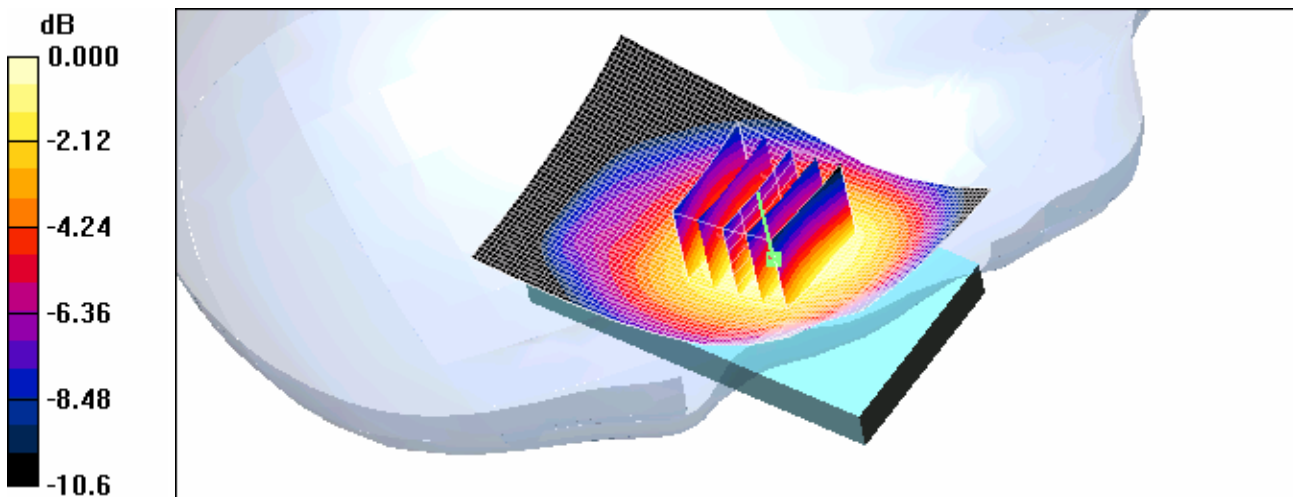

0 dB = 0.625mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.867$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 190/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.399 mW/g

Left tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.1 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.277 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.405 mW/g

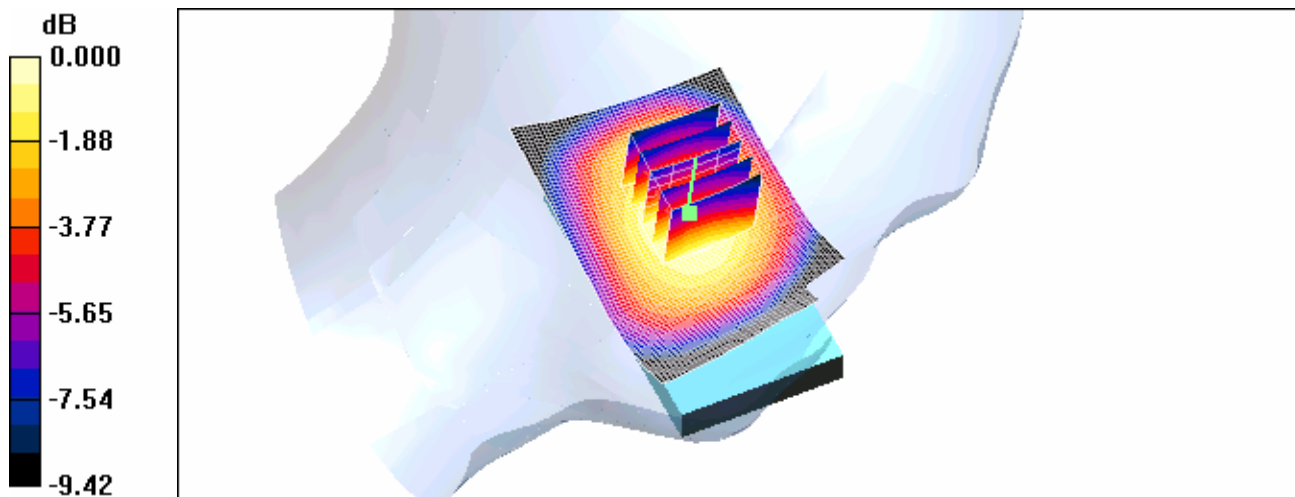

0 dB = 0.405mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.867 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 190/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.348 mW/g

Right tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.2 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.242 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.348 mW/g

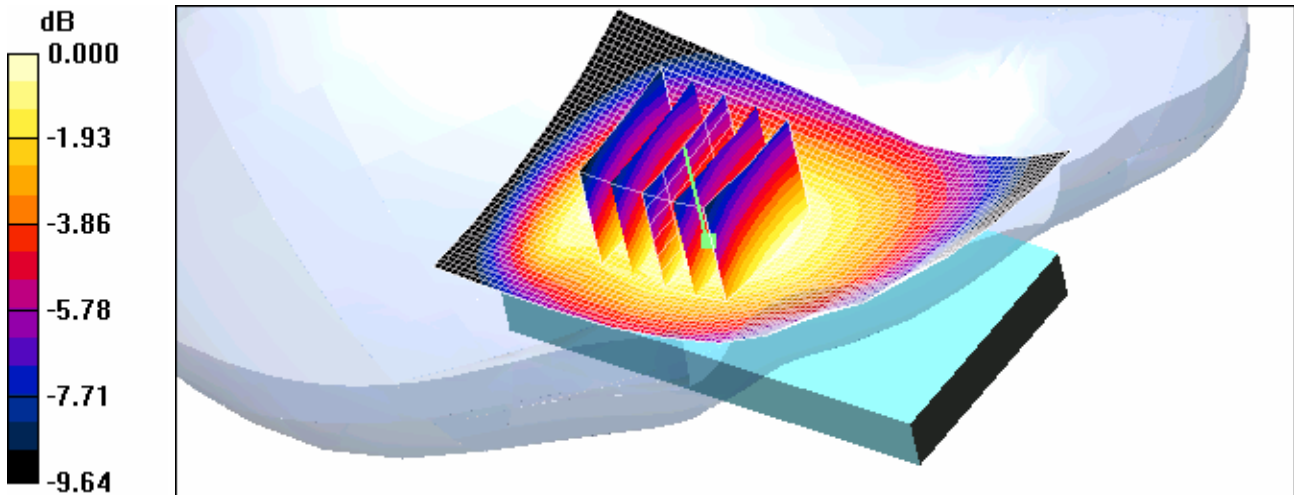

0 dB = 0.348mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.739 mW/g

Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.6 V/m; Power Drift = -0.031 dB
Peak SAR (extrapolated) = 0.912 W/kg
SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.394 mW/g
Maximum value of SAR (measured) = 0.668 mW/g

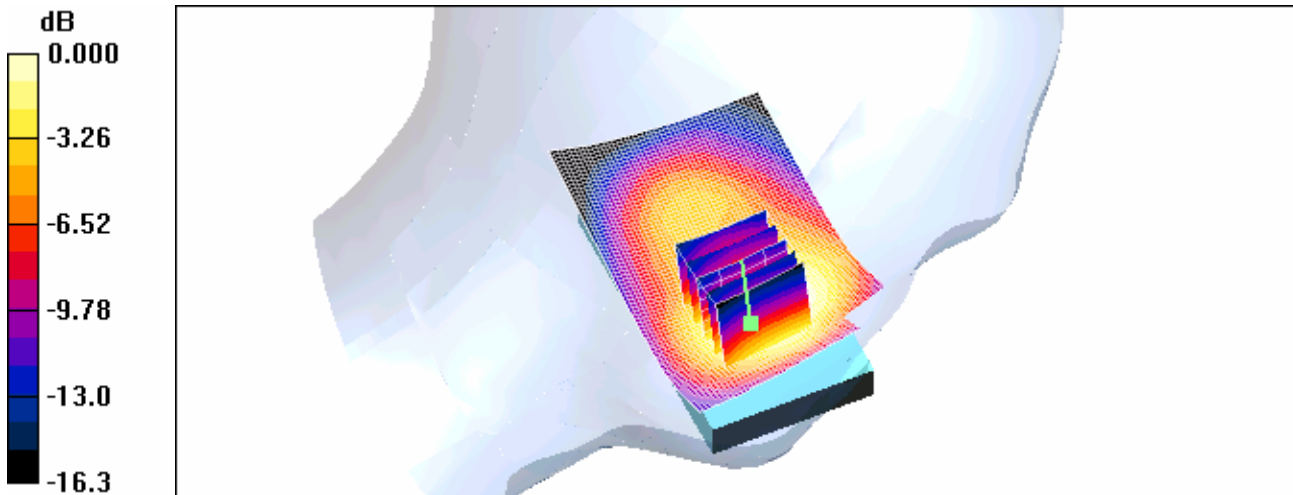

0 dB = 0.668mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.02 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.28 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.520 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.950 mW/g

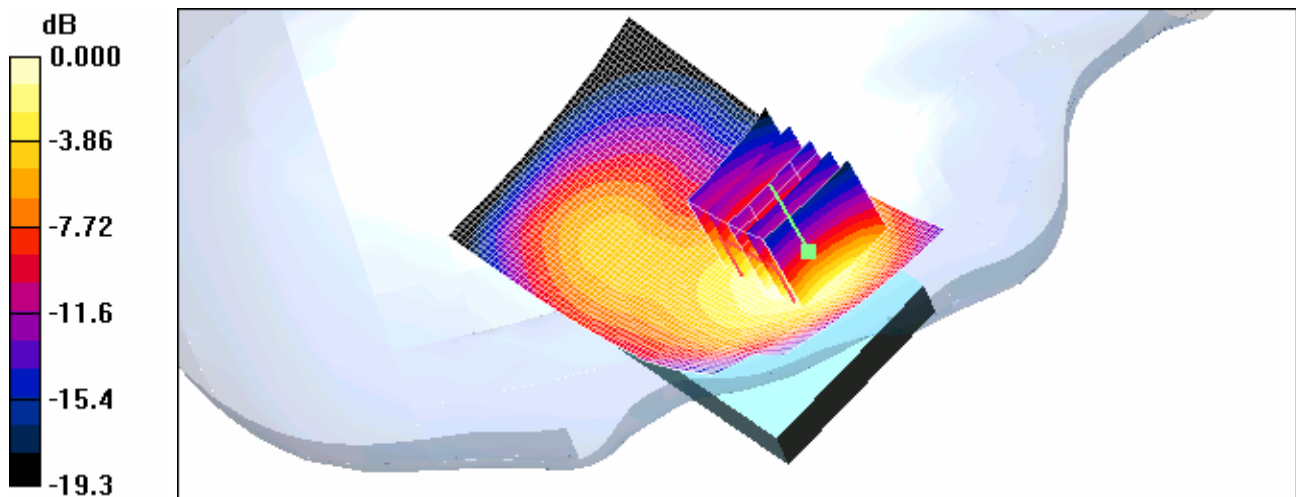

0 dB = 0.950mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.19 mW/g

Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.98 V/m; Power Drift = 0.012 dB
Peak SAR (extrapolated) = 1.58 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.602 mW/g
Maximum value of SAR (measured) = 1.14 mW/g

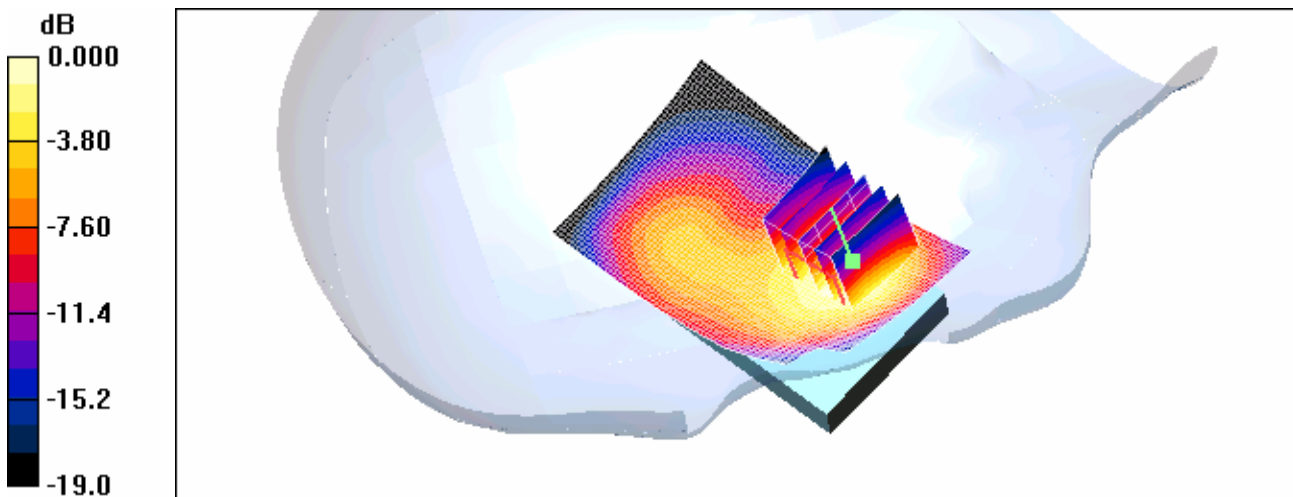

0 dB = 1.14mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.05 mW/g

Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.56 V/m; Power Drift = -0.012 dB
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.893 mW/g; SAR(10 g) = 0.516 mW/g
Maximum value of SAR (measured) = 0.967 mW/g

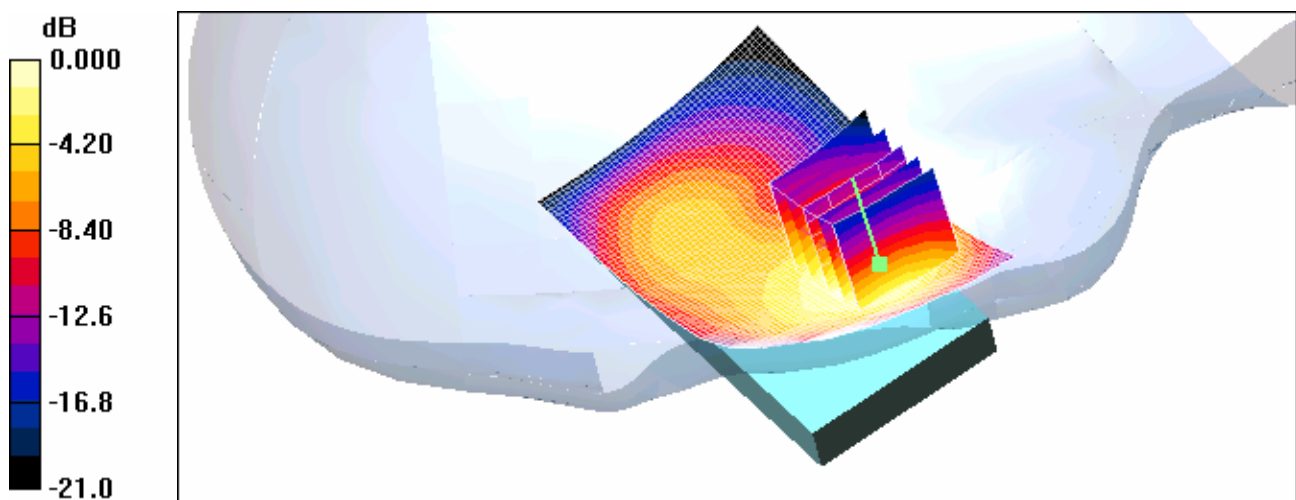

0 dB = 0.967mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.517 mW/g

Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 18.9 V/m; Power Drift = 0.035 dB
Peak SAR (extrapolated) = 0.635 W/kg
SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.256 mW/g
Maximum value of SAR (measured) = 0.457 mW/g

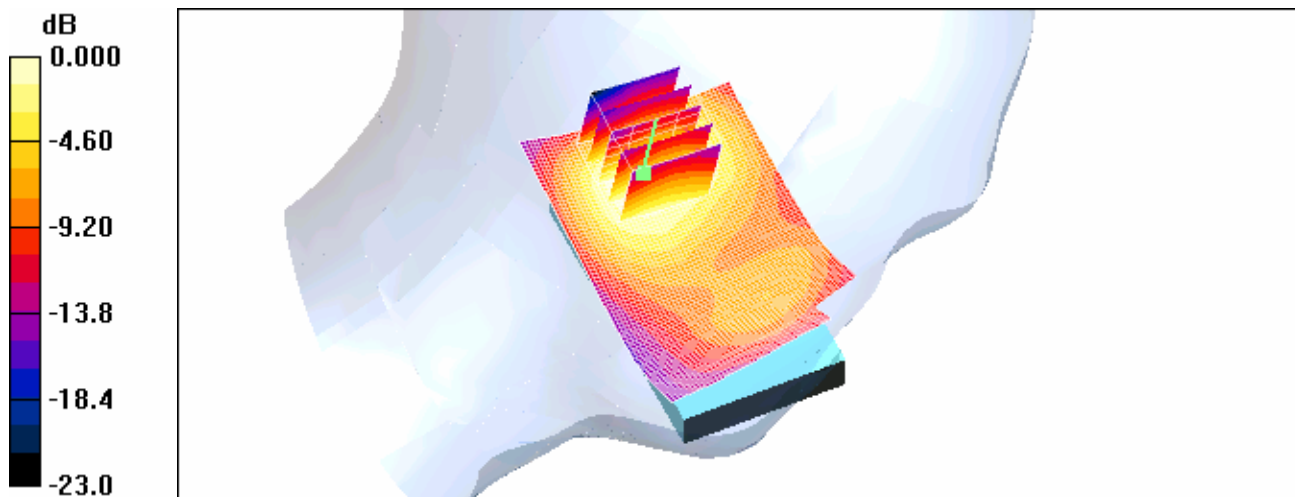

0 dB = 0.457mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.543 mW/g

Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 15.3 V/m; Power Drift = 0.032 dB
Peak SAR (extrapolated) = 0.724 W/kg
SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.258 mW/g
Maximum value of SAR (measured) = 0.457 mW/g

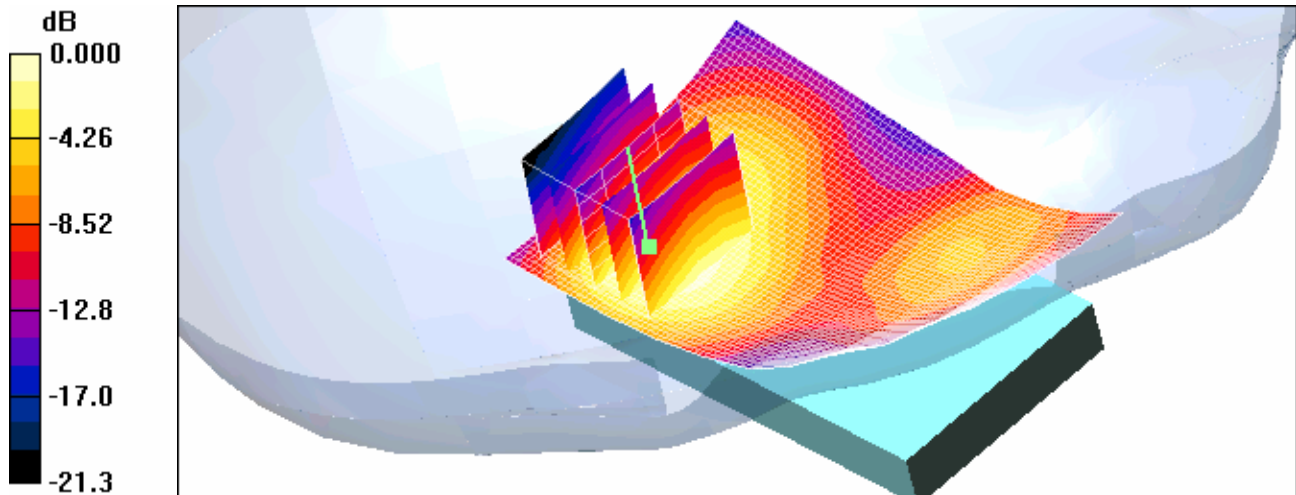

0 dB = 0.457mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.867$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 4183/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.523 mW/g

Left touch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.60 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.344 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.517 mW/g

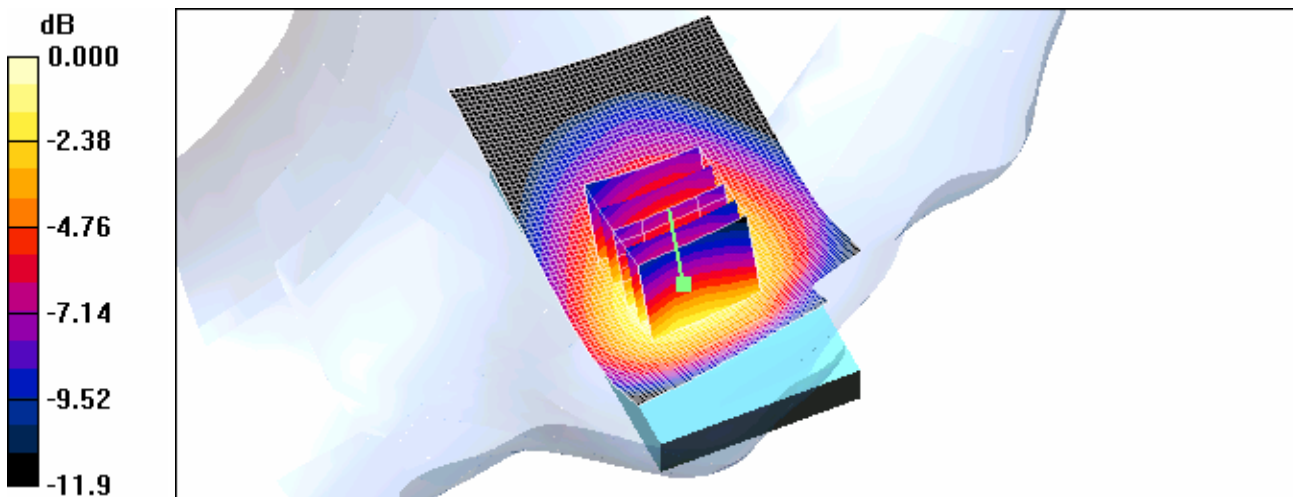

0 dB = 0.517mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.867$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 4183/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.401 mW/g

Right touch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.27 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.272 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.393 mW/g

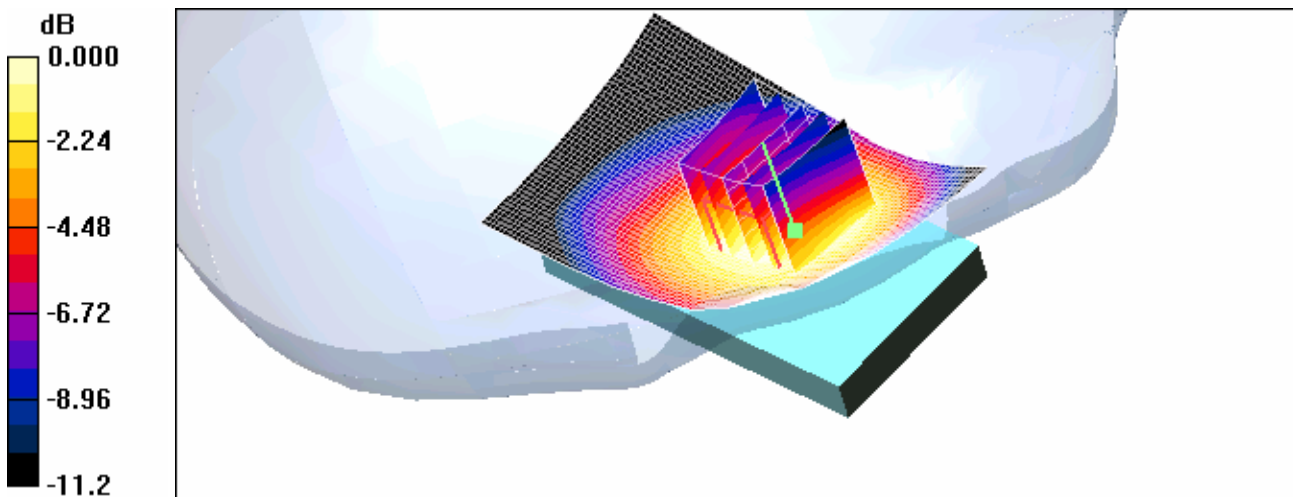

0 dB = 0.393mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.867$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 4183/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.232 mW/g

Left tilt 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.8 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.167 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.239 mW/g

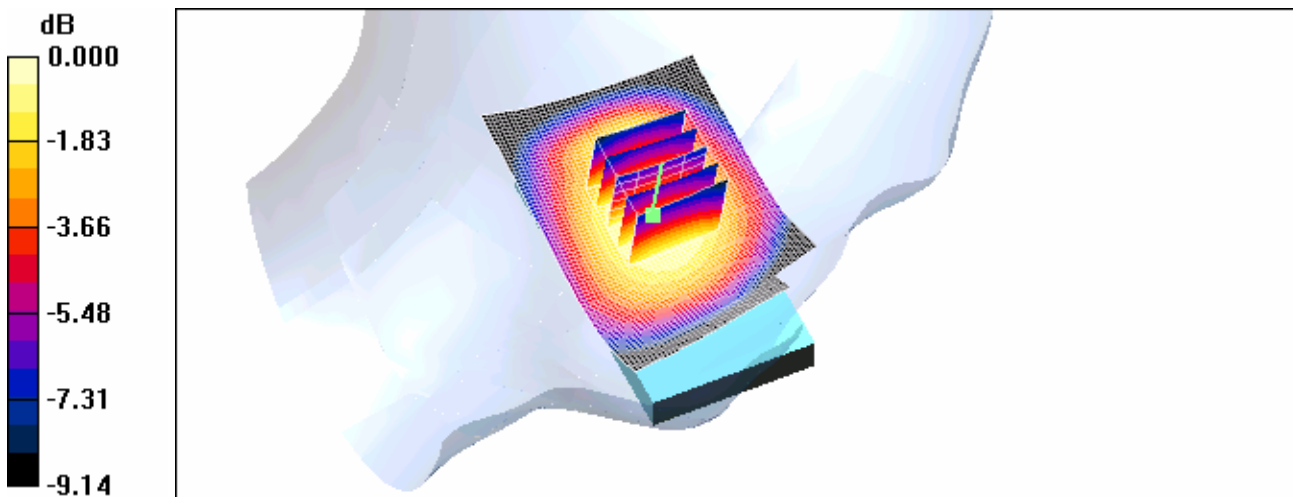

0 dB = 0.239mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.867$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 4183/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.219 mW/g

Right tilt 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.4 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.152 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.219 mW/g

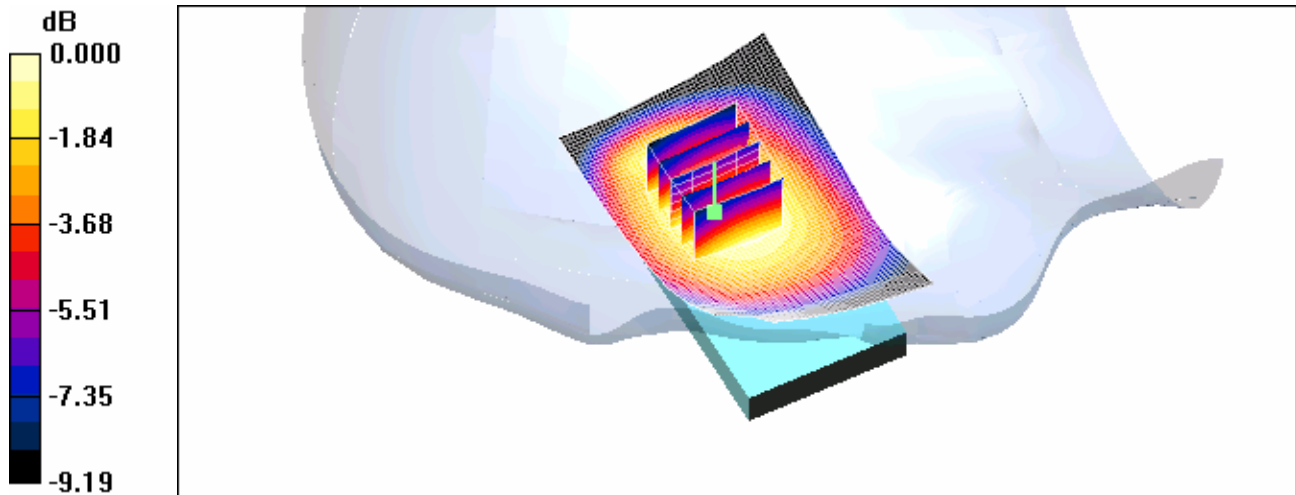

0 dB = 0.219mW/g

Test Laboratory: HCT CO., LTD
 EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
 GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
 Liquid Temperature: 21.3 °C
 Ambient Temperature: 21.5 °C
 Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1852.4 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 9262/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.18 mW/g

Left touch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.8 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.624 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 mW/g

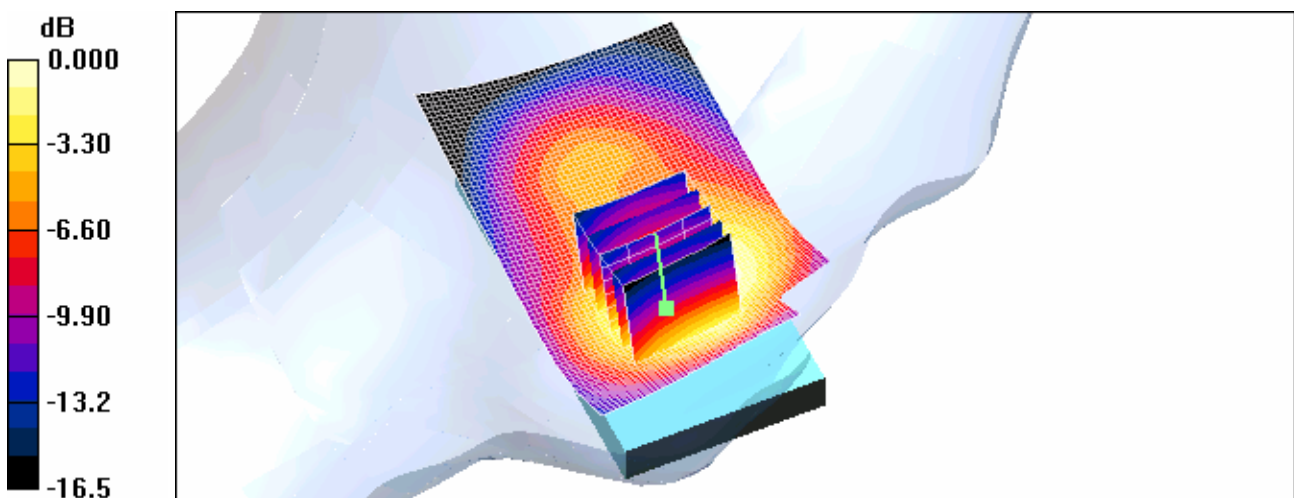

0 dB = 1.07mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 9400/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.19 mW/g

Left touch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.2 V/m; Power Drift = -0.195 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.611 mW/g
Maximum value of SAR (measured) = 1.06 mW/g

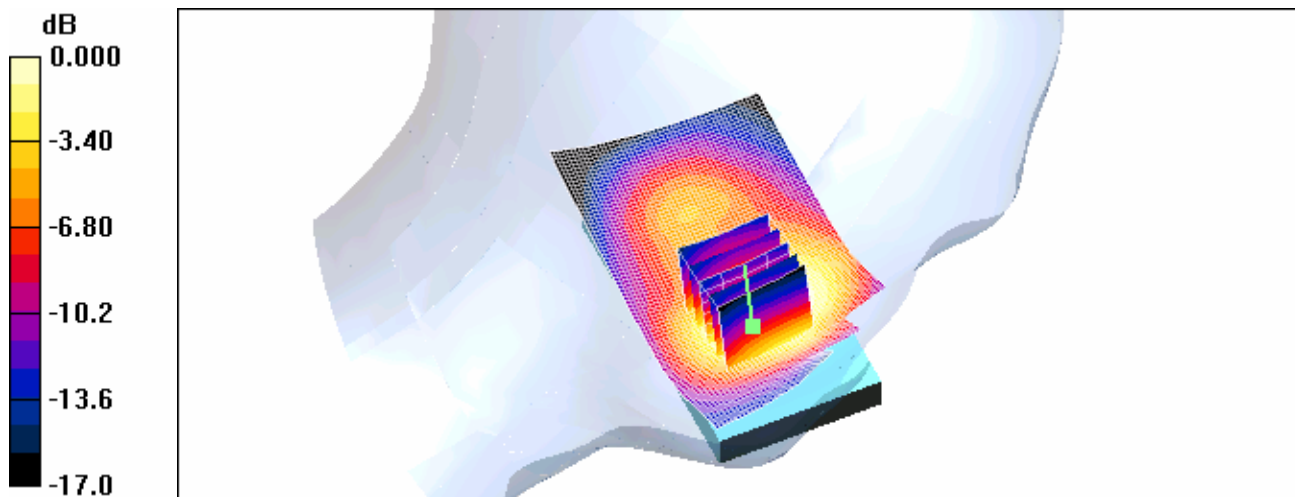

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 9538/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.02 mW/g

Left touch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.3 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.524 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.949 mW/g

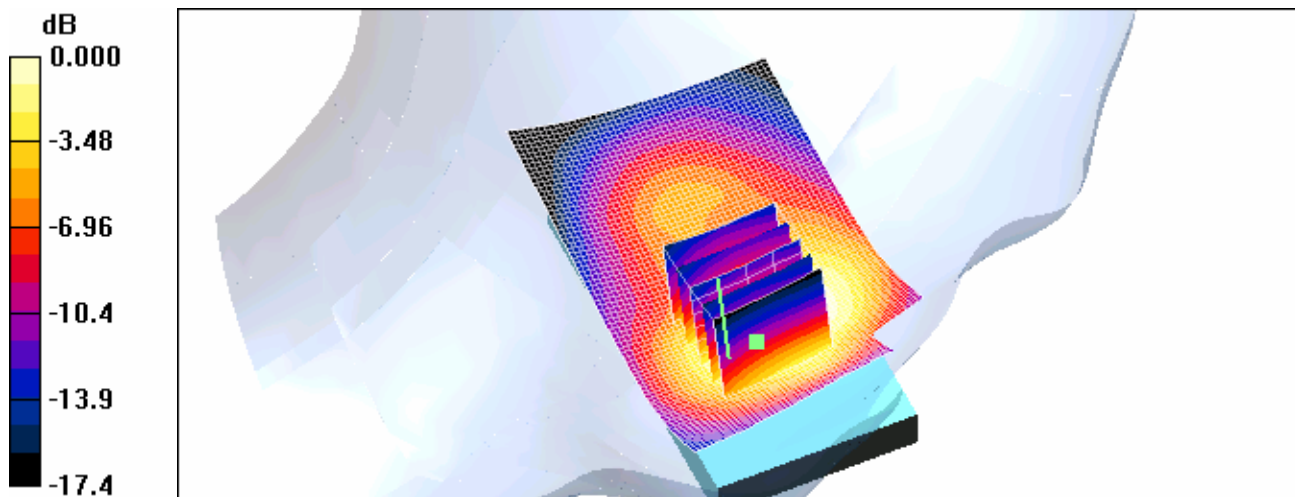

0 dB = 0.949mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 9262/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.38 mW/g

Right touch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.2 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.714 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 mW/g

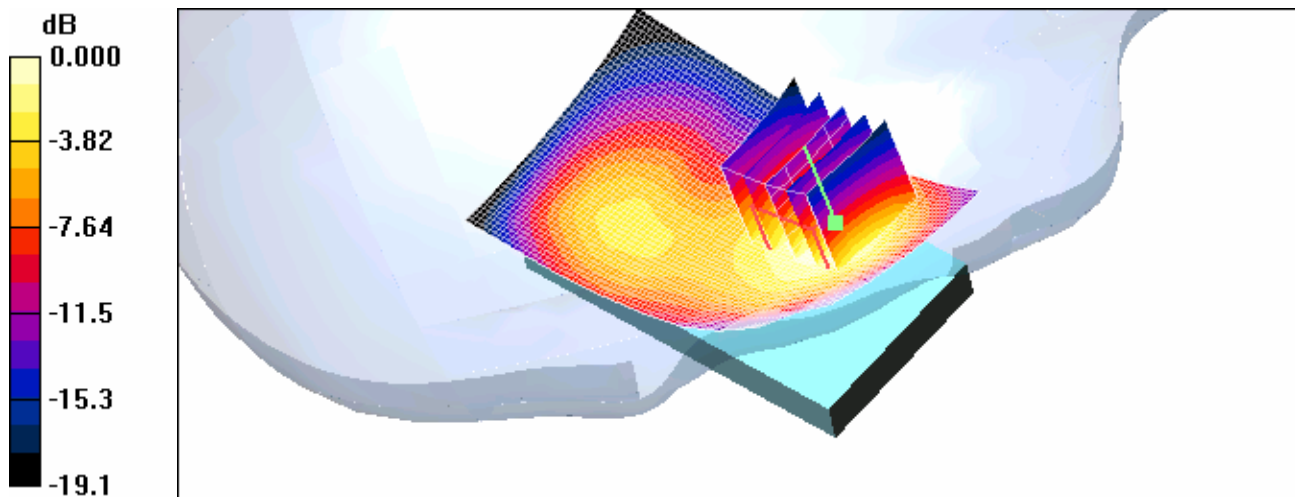

0 dB = 1.33mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 9400/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.40 mW/g

Right touch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 15.2 V/m; Power Drift = -0.025 dB
Peak SAR (extrapolated) = 1.85 W/kg
SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.699 mW/g
Maximum value of SAR (measured) = 1.31 mW/g

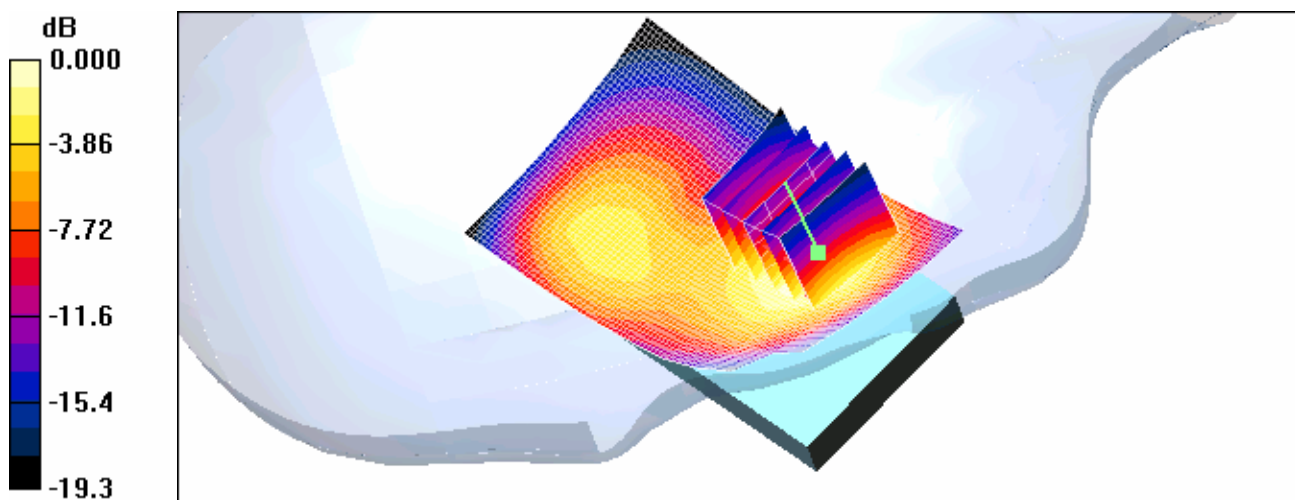

0 dB = 1.31mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 9538/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.11 mW/g

Right touch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.6 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.984 mW/g; SAR(10 g) = 0.578 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 mW/g

Right touch 9538/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.6 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.448 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.829 mW/g

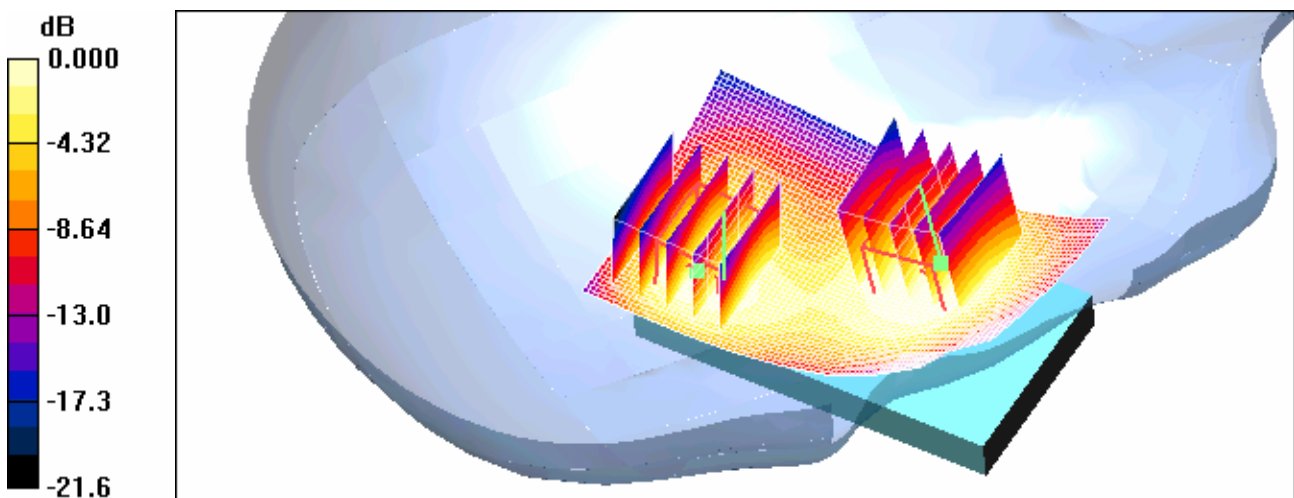

0 dB = 0.829mW/g

Test Laboratory: HCT CO., LTD
 EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
 GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
 Liquid Temperature: 21.3 °C
 Ambient Temperature: 21.5 °C
 Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
 - Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn466; Calibrated: 2010-07-21
 - Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 9400/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.600 mW/g

Left tilt 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.0 V/m; Power Drift = 0.031 dB
 Peak SAR (extrapolated) = 0.787 W/kg
SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.331 mW/g
 Maximum value of SAR (measured) = 0.577 mW/g

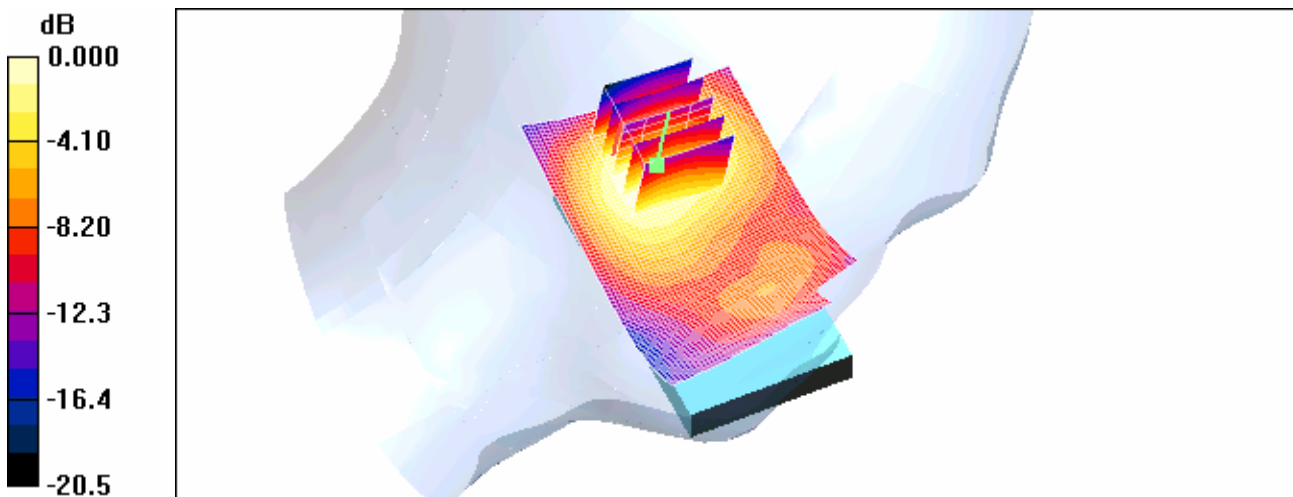

0 dB = 0.577mW/g

Test Laboratory: HCT CO., LTD
 EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
 GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
 Liquid Temperature: 21.3 °C
 Ambient Temperature: 21.5 °C
 Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
 - Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn466; Calibrated: 2010-07-21
 - Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 9400/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.892 mW/g

Right tilt 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.6 V/m; Power Drift = 0.004 dB
 Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.721 mW/g; SAR(10 g) = 0.422 mW/g
 Maximum value of SAR (measured) = 0.773 mW/g

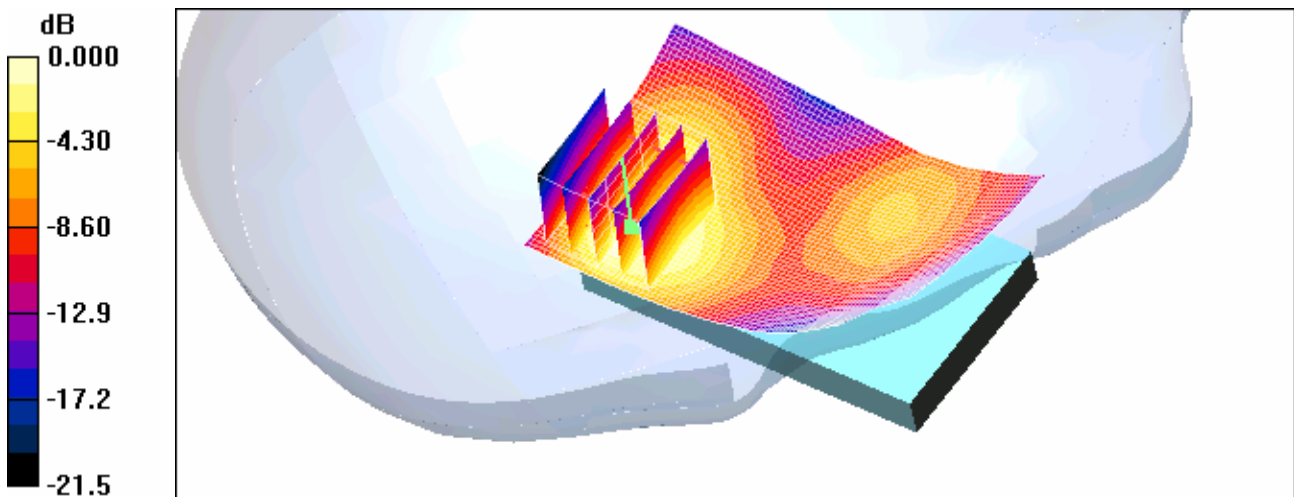

0 dB = 0.773mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 190/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.471 mW/g

Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.7 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.319 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.472 mW/g

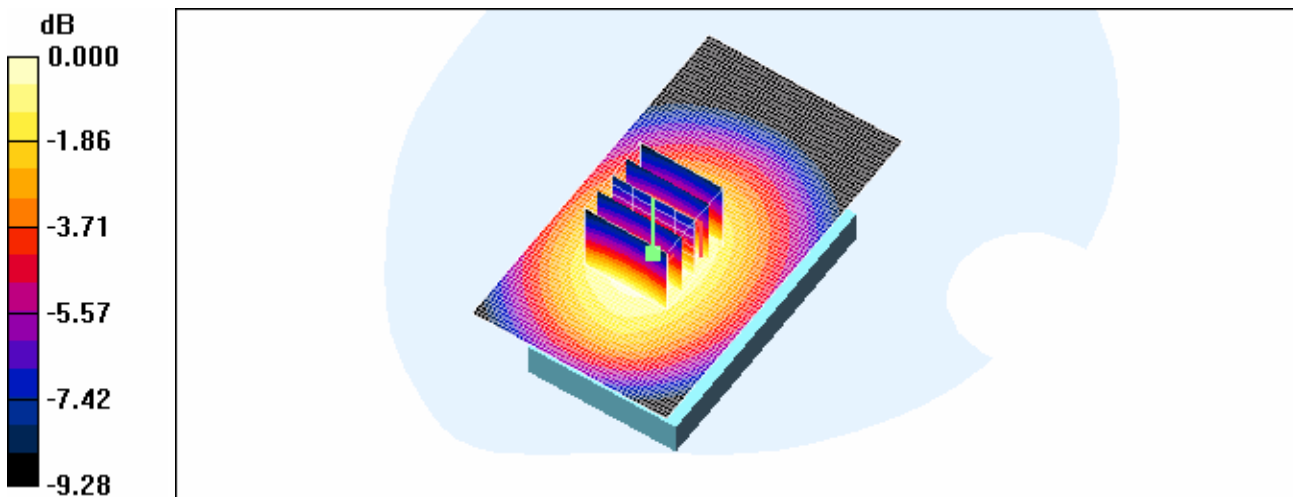

0 dB = 0.472mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 190/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.807 mW/g

Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.3 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.550 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.804 mW/g

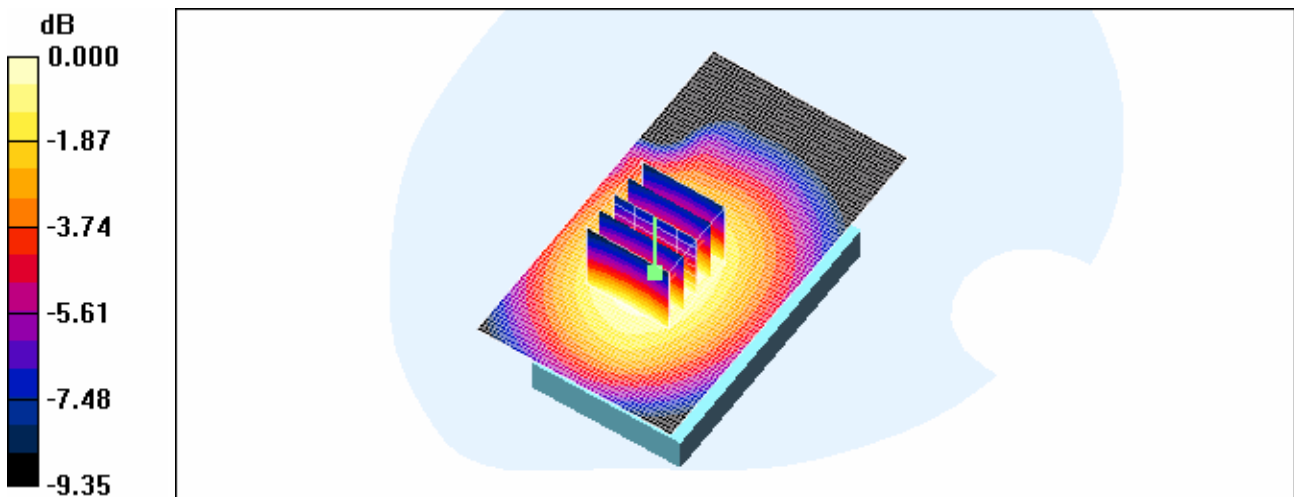

0 dB = 0.804mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 190/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.832 mW/g

Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.1 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.788 mW/g; SAR(10 g) = 0.569 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.832 mW/g

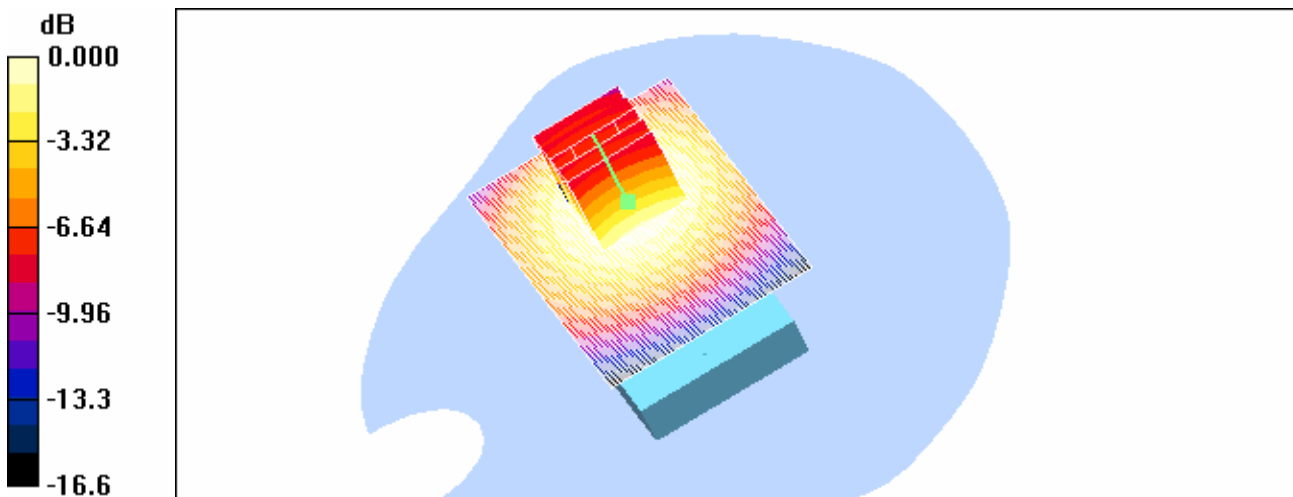

0 dB = 0.832mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 190/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.697 mW/g

Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.9 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.653 mW/g; SAR(10 g) = 0.470 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.693 mW/g

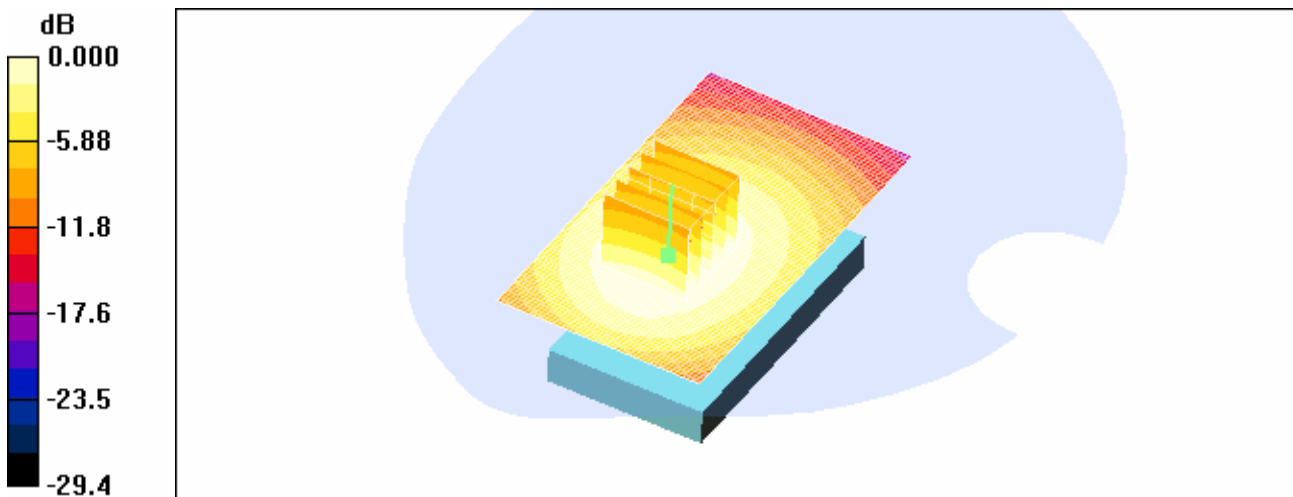

0 dB = 0.693mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8
Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 190/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.576 mW/g

Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.9 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.690 W/kg

SAR(1 g) = 0.529 mW/g; SAR(10 g) = 0.380 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.560 mW/g

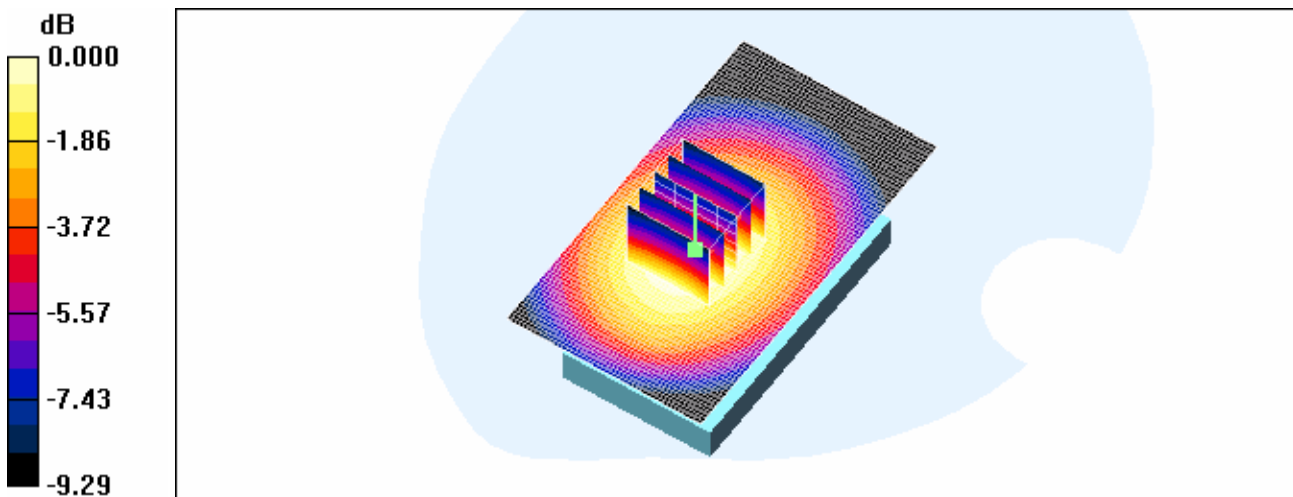

0 dB = 0.560mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 190/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.593 mW/g

Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.1 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.413 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.597 mW/g

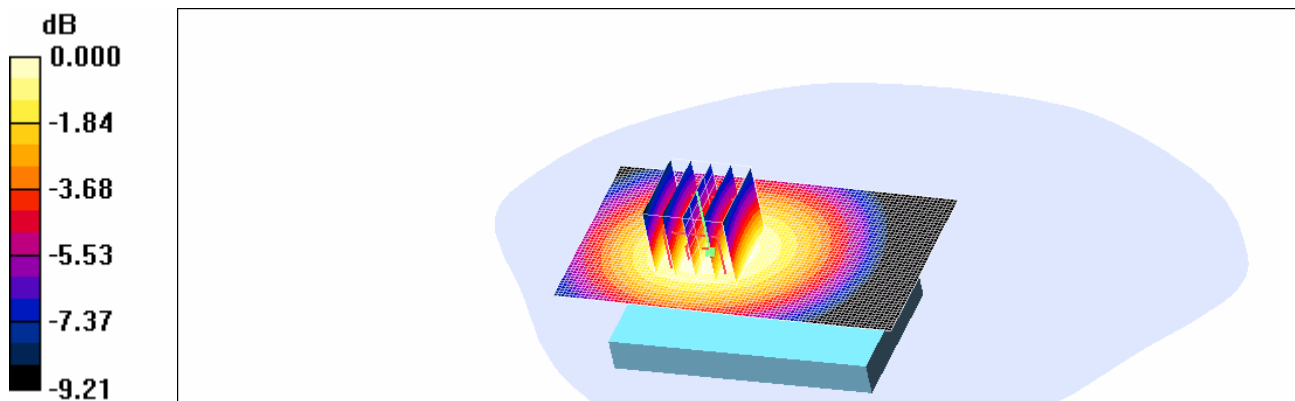

0 dB = 0.597mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 661/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.214 mW/g

Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.0 V/m; Power Drift = 0.084 dB
Peak SAR (extrapolated) = 0.285 W/kg
SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.123 mW/g
Maximum value of SAR (measured) = 0.208 mW/g

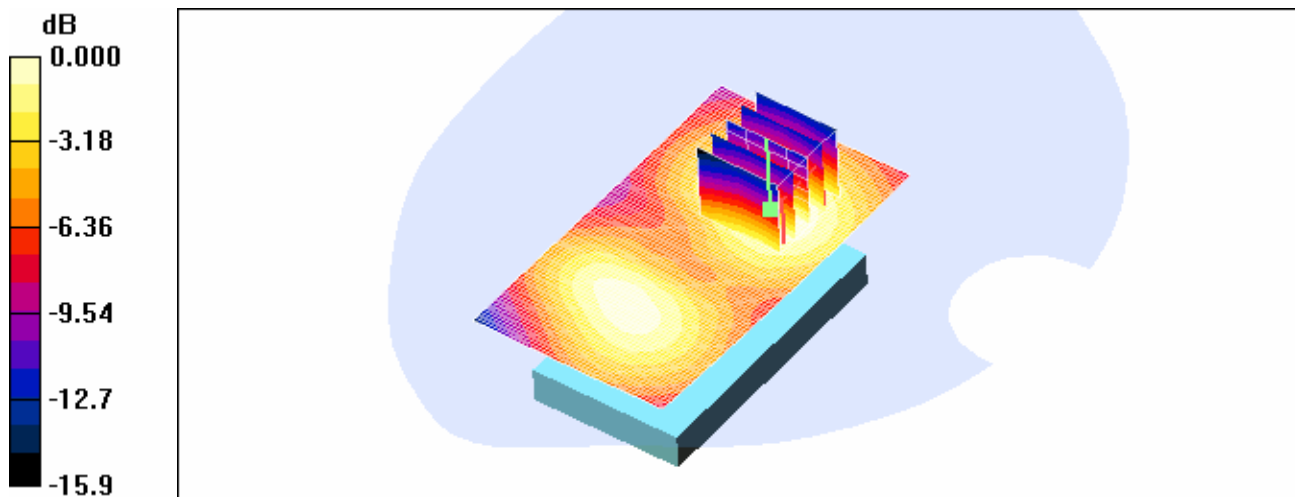

0 dB = 0.208mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 661/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.301 mW/g

Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.3 V/m; Power Drift = 0.101 dB
Peak SAR (extrapolated) = 0.401 W/kg
SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.173 mW/g
Maximum value of SAR (measured) = 0.292 mW/g

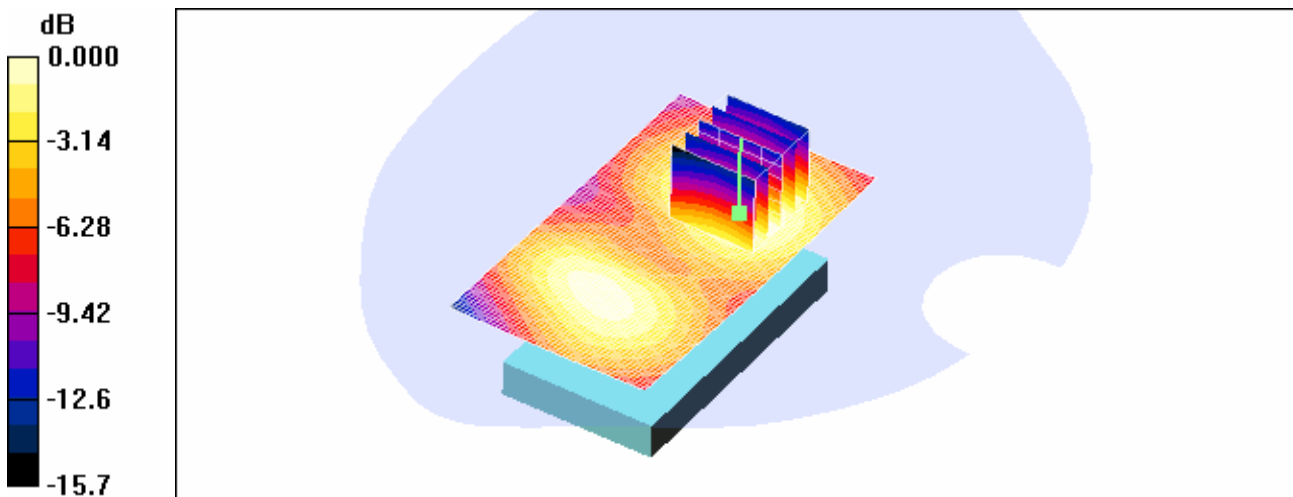

0 dB = 0.292mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 661/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.444 mW/g

Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 17.5 V/m; Power Drift = -0.109 dB
Peak SAR (extrapolated) = 0.586 W/kg
SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.252 mW/g
Maximum value of SAR (measured) = 0.430 mW/g

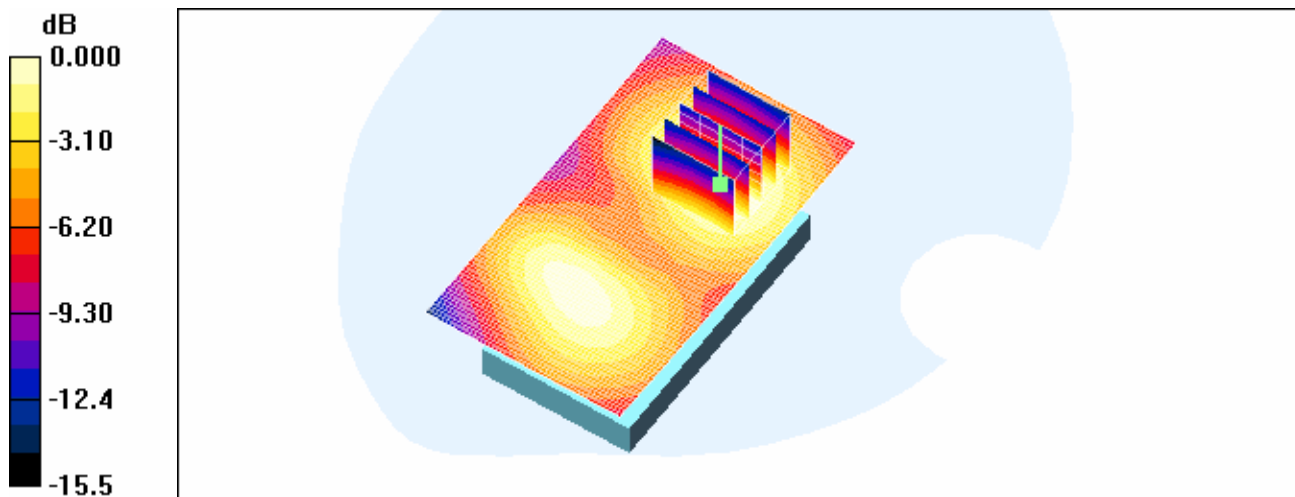

0 dB = 0.430mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 661/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.364 mW/g

Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 16.0 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.479 W/kg
SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.206 mW/g
Maximum value of SAR (measured) = 0.350 mW/g

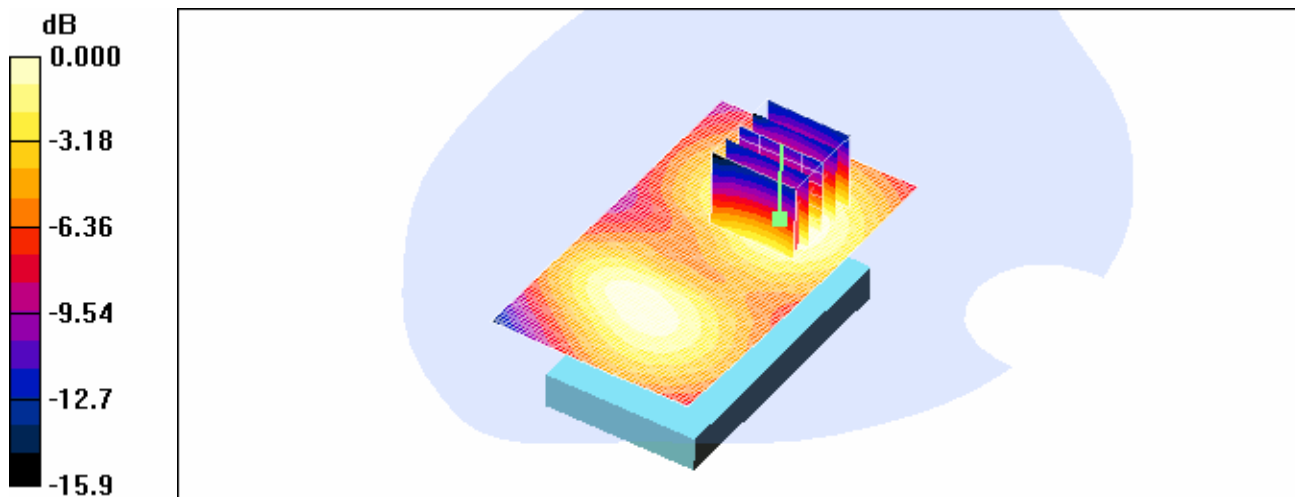

0 dB = 0.350mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 661/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.145 mW/g

Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.3 V/m; Power Drift = 0.0001 dB
Peak SAR (extrapolated) = 0.199 W/kg
SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.082 mW/g
Maximum value of SAR (measured) = 0.142 mW/g

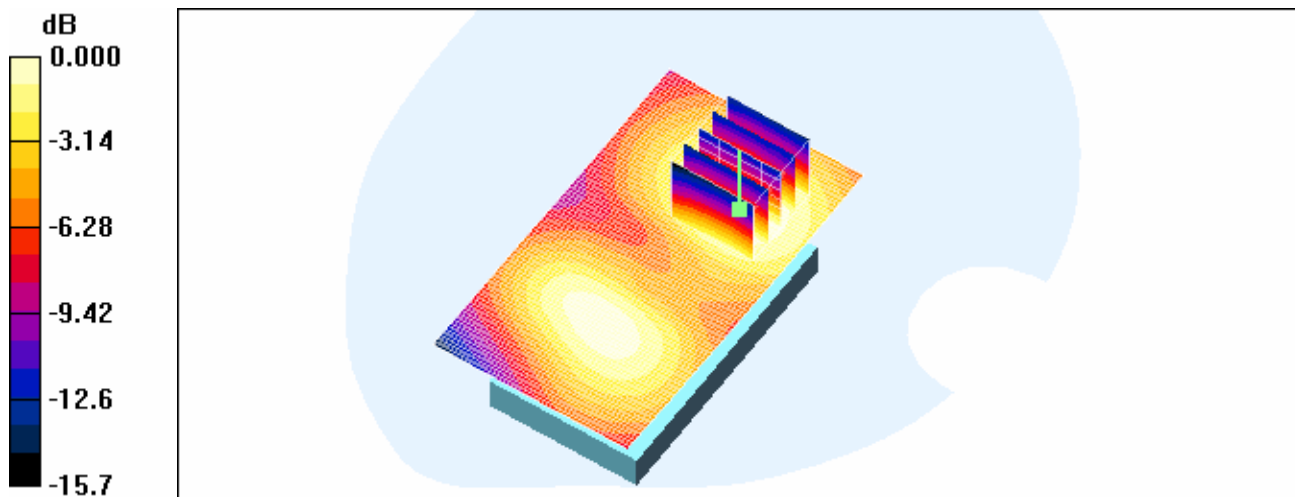

0 dB = 0.142mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 661/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.369 mW/g

Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.9 V/m; Power Drift = 0.042 dB
Peak SAR (extrapolated) = 0.520 W/kg
SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.222 mW/g
Maximum value of SAR (measured) = 0.380 mW/g

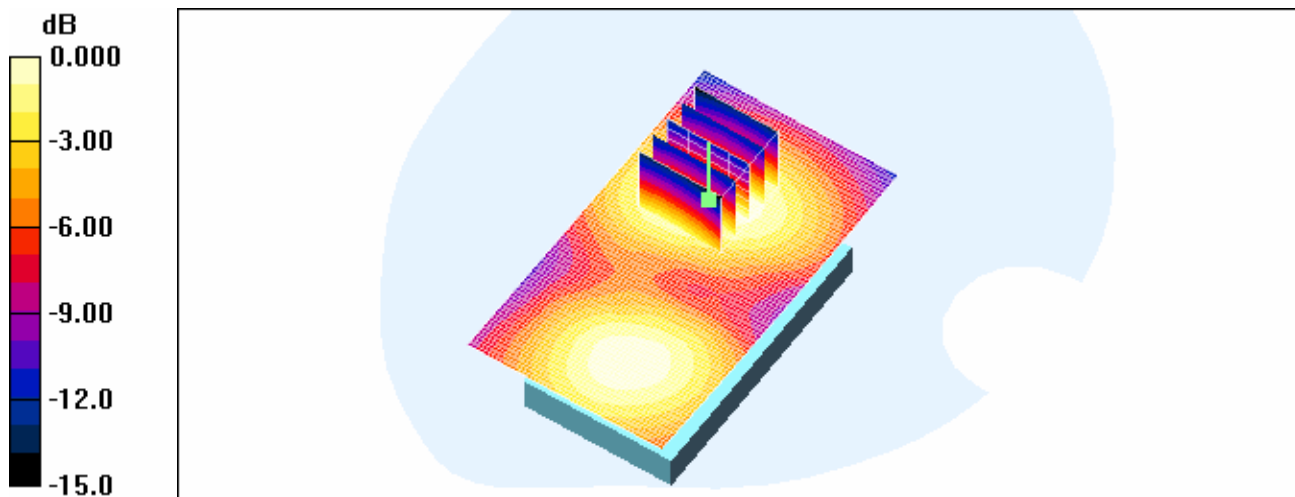

0 dB = 0.380mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 4183/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.339 mW/g

Body 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.1 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.233 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.345 mW/g

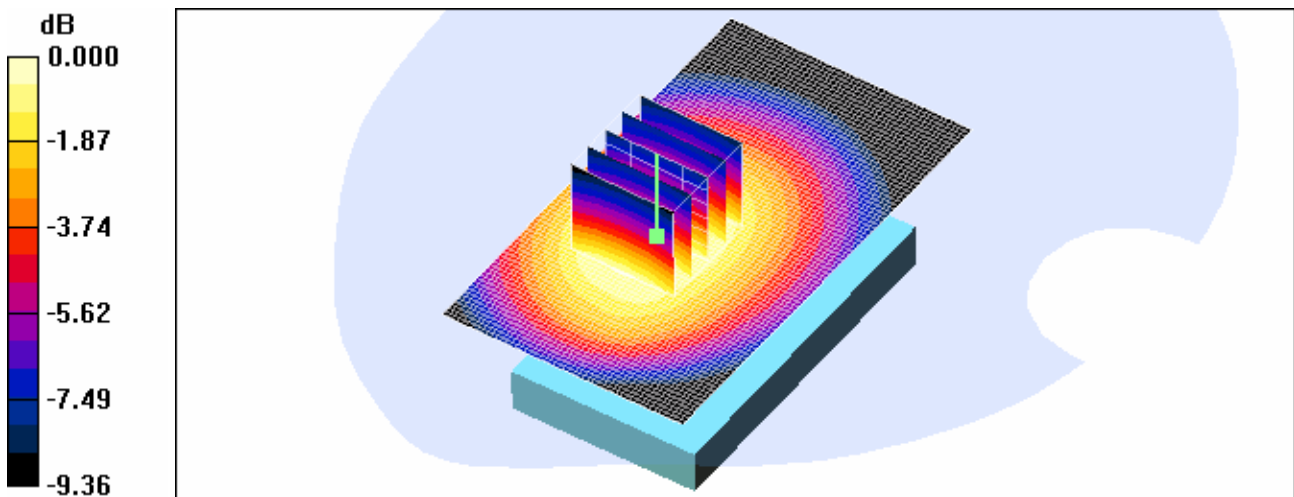

0 dB = 0.345mW/g

Test Laboratory: HCT CO., LTD
 EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
 GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
 Liquid Temperature: 21.2 °C
 Ambient Temperature: 21.4 °C
 Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.951 \text{ mho/m}$; $\epsilon_r = 56.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8
 Build 176

DASY4 Configuration:
 - Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn466; Calibrated: 2010-07-21
 - Phantom: SAM 835/900 MHz; Type: SAM

Body 4183/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.220 mW/g

Body 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.44 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.154 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.221 mW/g

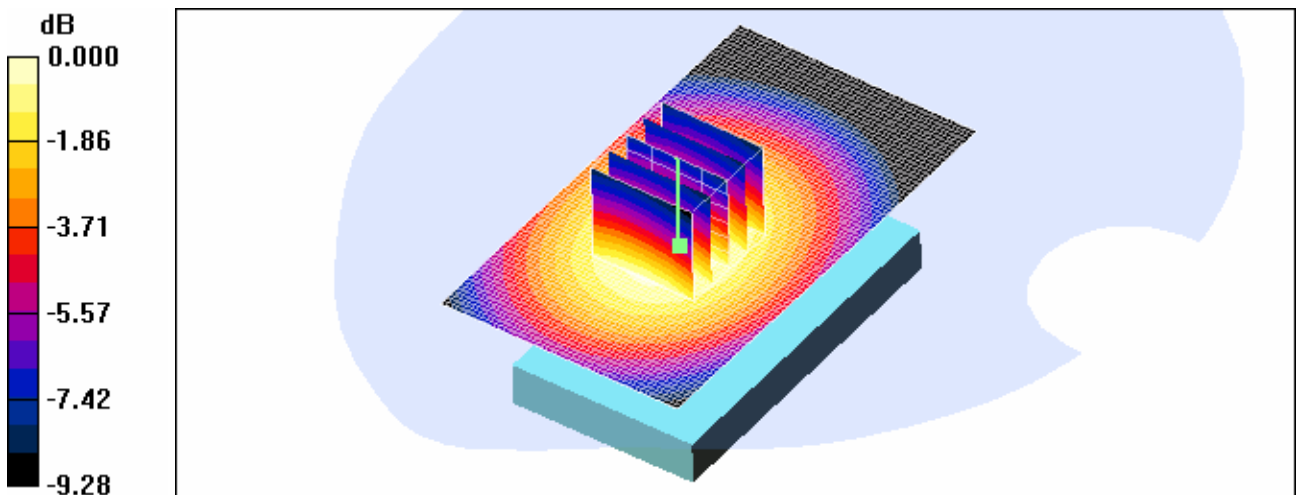

0 dB = 0.221mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010


DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 9400/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.288 mW/g

Body 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.1 V/m; Power Drift = 0.176 dB
Peak SAR (extrapolated) = 0.393 W/kg
SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.166 mW/g
Maximum value of SAR (measured) = 0.286 mW/g

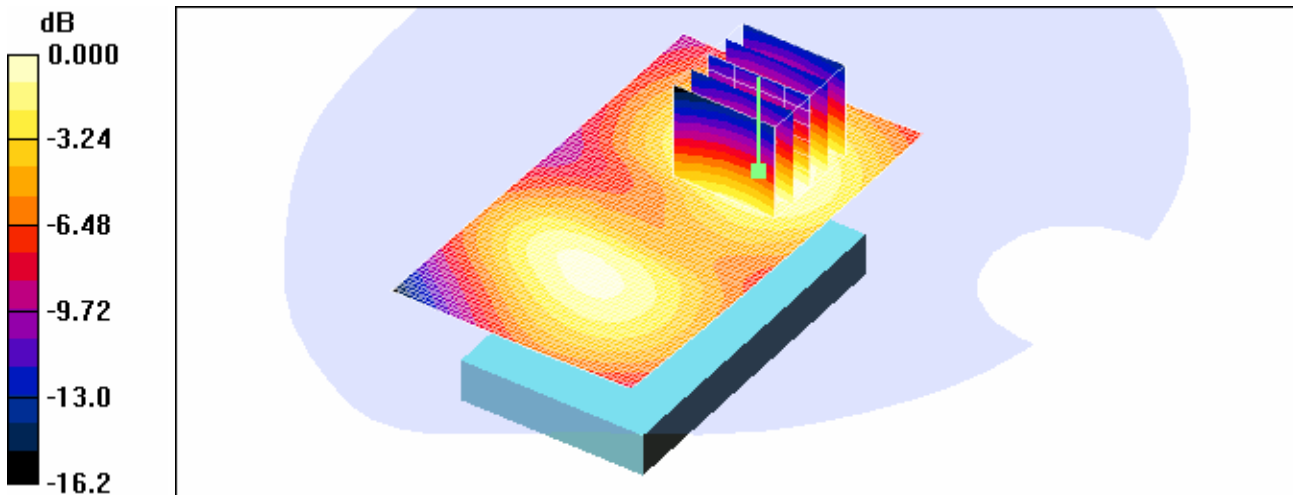

0 dB = 0.286mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 9400/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.261 mW/g

Body 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.6 V/m; Power Drift = -0.171 dB
Peak SAR (extrapolated) = 0.371 W/kg
SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.156 mW/g
Maximum value of SAR (measured) = 0.270 mW/g

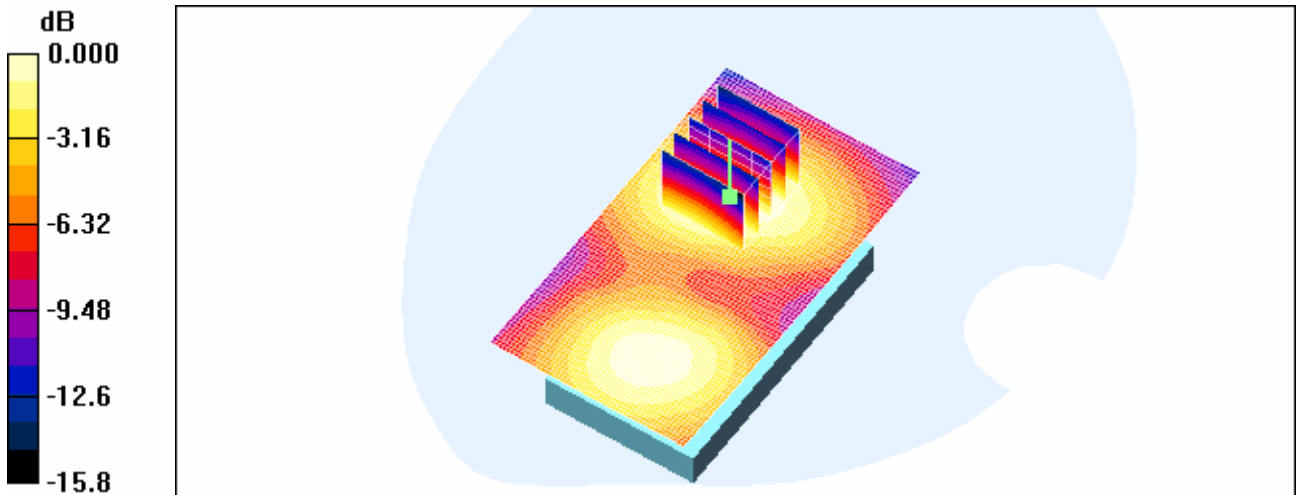

0 dB = 0.270mW/g

Test Laboratory: HCT CO., LTD
 EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
 GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
 Liquid Temperature: 21.2 °C
 Ambient Temperature: 21.4 °C
 Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
 - Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn466; Calibrated: 2010-07-21
 - Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.04 mW/g

Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.3 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.957 mW/g; SAR(10 g) = 0.687 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 mW/g

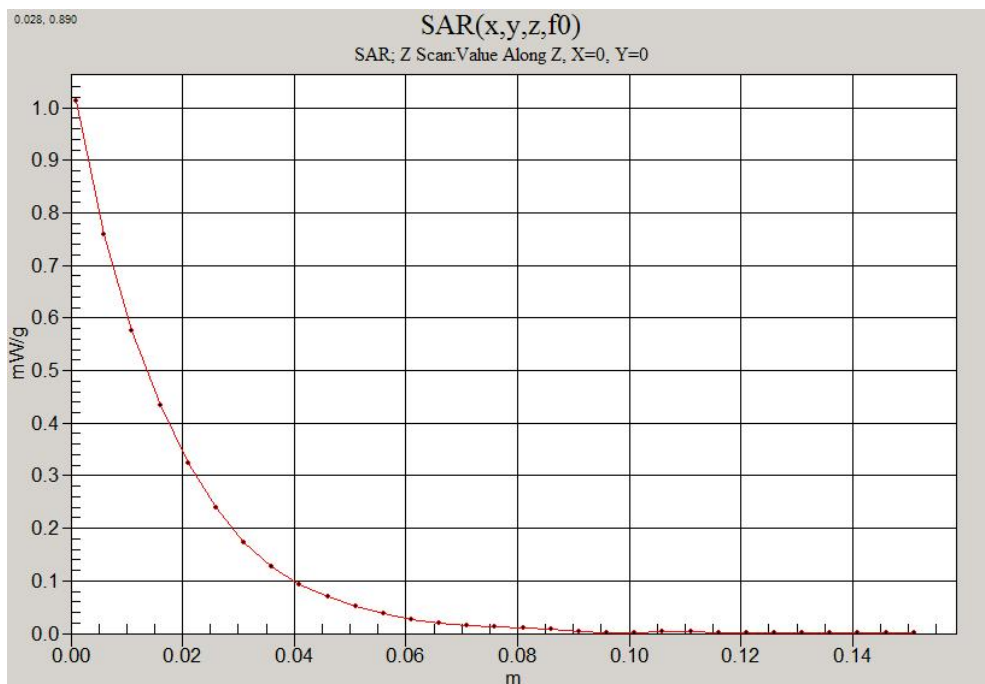

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 190/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.832 mW/g

Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.1 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.788 mW/g; SAR(10 g) = 0.569 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.832 mW/g

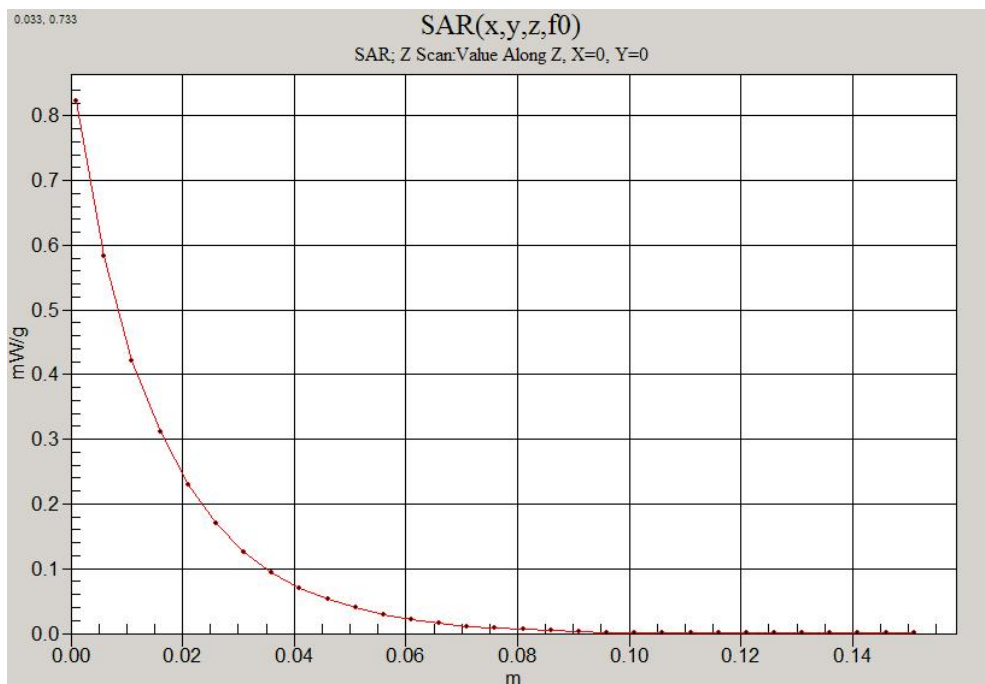

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.19 mW/g

Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.98 V/m; Power Drift = 0.012 dB
Peak SAR (extrapolated) = 1.58 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.602 mW/g
Maximum value of SAR (measured) = 1.14 mW/g

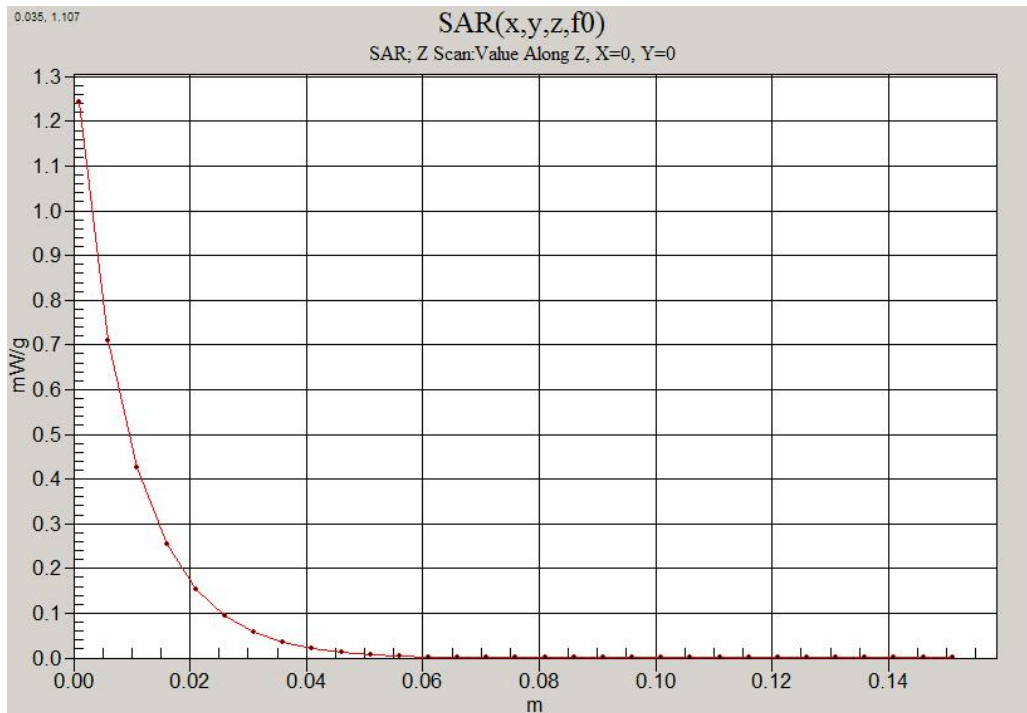

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.444 mW/g

Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.5 V/m; Power Drift = -0.109 dB
Peak SAR (extrapolated) = 0.586 W/kg
SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.252 mW/g
Maximum value of SAR (measured) = 0.430 mW/g

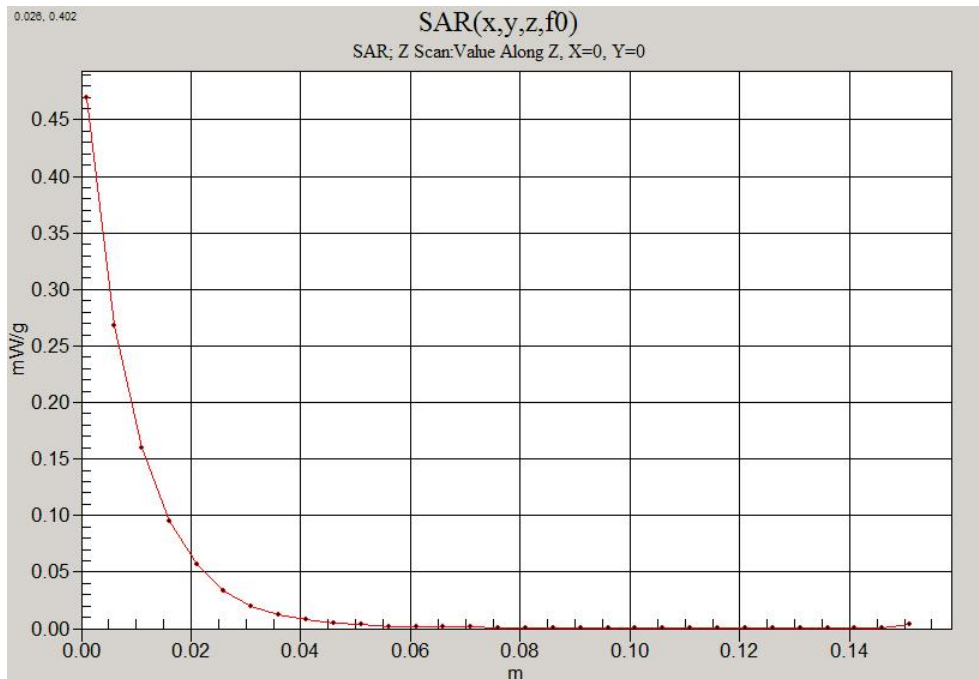

Test Laboratory: HCT CO., LTD
 EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
 GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
 Liquid Temperature: 21.2 °C
 Ambient Temperature: 21.4 °C
 Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.867 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
 - Probe: ET3DV6 - SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn466; Calibrated: 2010-07-21
 - Phantom: SAM 835/900 MHz; Type: SAM

Left touch 4183/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.523 mW/g

Left touch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.60 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.344 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.517 mW/g

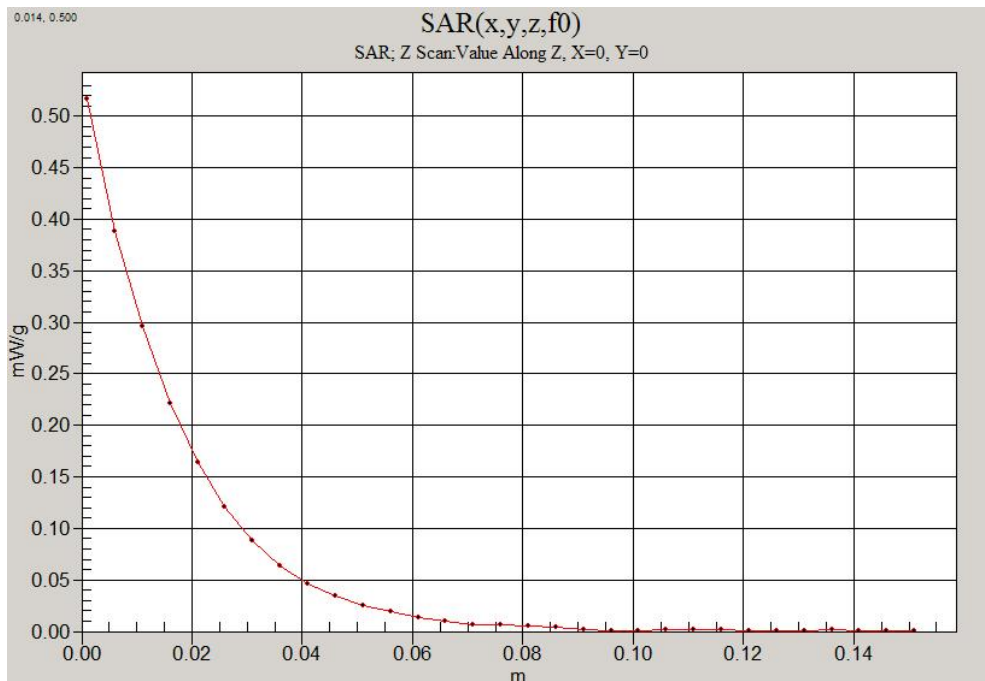

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Aug.15, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.17, 6.17, 6.17); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Body 4183/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.339 mW/g

Body 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.1 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.233 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.345 mW/g

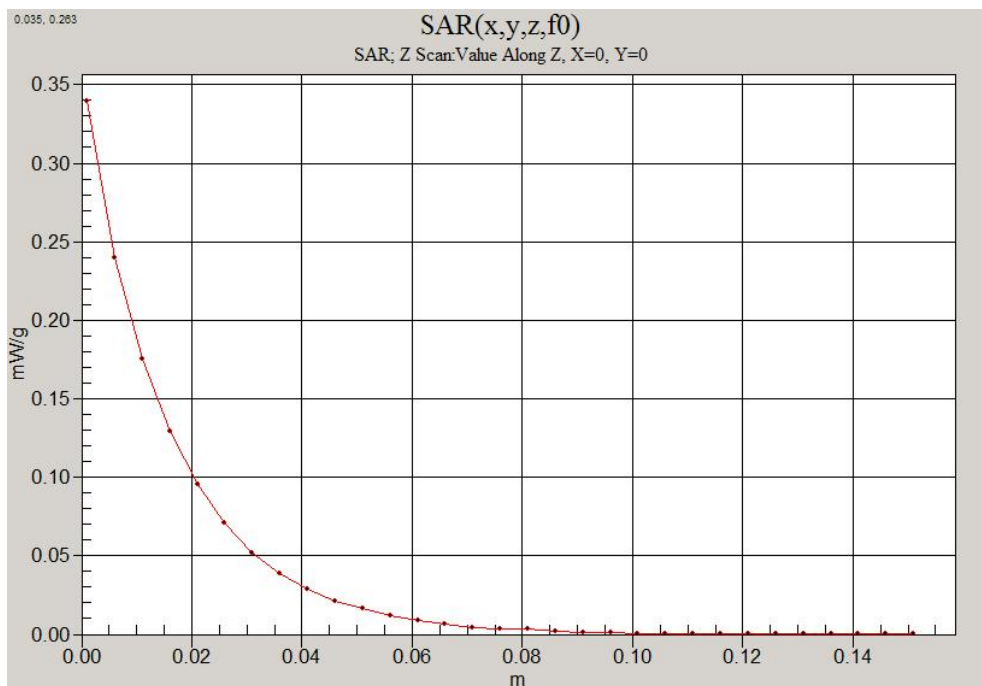

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 9262/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.38 mW/g

Right touch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.2 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.714 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 mW/g

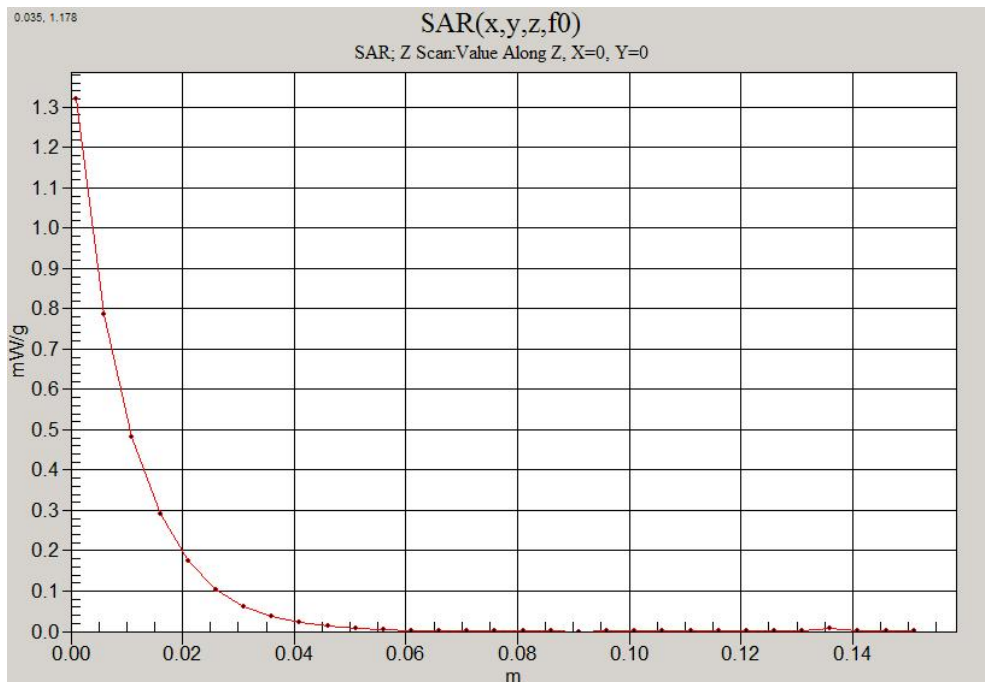

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Aug.16, 2010

DUT: LG-T320g; Type: bar; Serial: #1


Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Body 9400/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.288 mW/g

Body 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.1 V/m; Power Drift = 0.176 dB
Peak SAR (extrapolated) = 0.393 W/kg
SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.166 mW/g
Maximum value of SAR (measured) = 0.286 mW/g

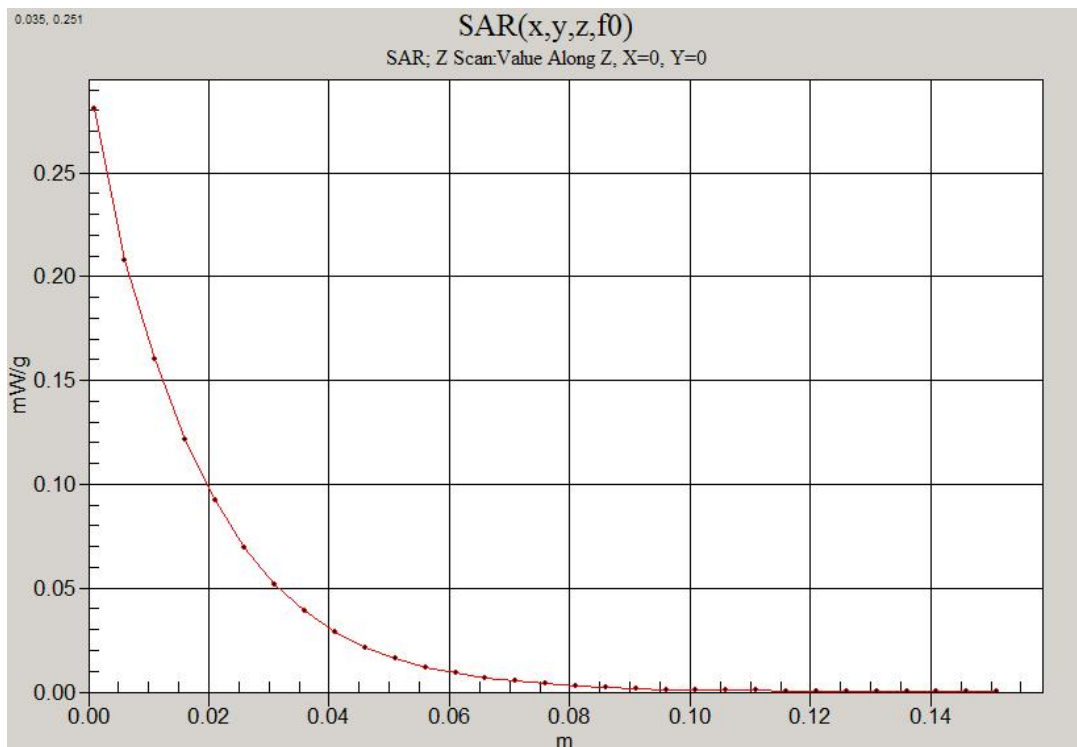

Attachment 2. – Dipole Validation Plots

■ Validation Data (835 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power 100 mW (20 dBm)
Liquid Temp: 21.2 °C
Test Date: Aug. 15, 2010

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 – SN:441


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 – SN1630; ConvF(6.25, 6.25, 6.25); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 835/900 MHz; Type: SAM

Validation 835MHz/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.08 mW/g

Validation 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 36.6 V/m; Power Drift = -0.017 dB
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.659 mW/g
Maximum value of SAR (measured) = 1.08 mW/g

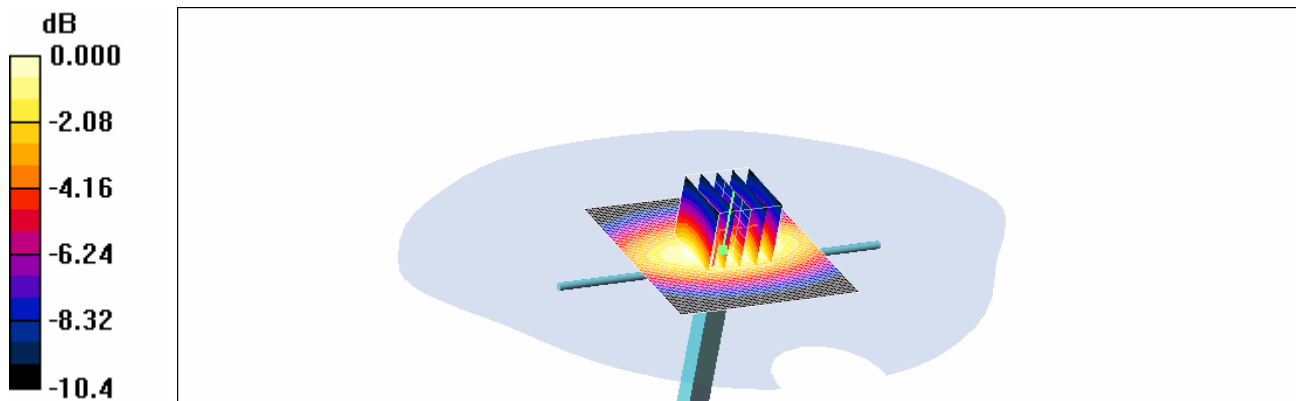

0 dB = 1.08mW/g

■ Validation Data (1900 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power 100 mW (20 dBm)
Liquid Temp: 21.3 °C
Test Date: Aug. 16, 2010

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 – SN:5d032


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 – SN1630; ConvF(5.12, 5.12, 5.12); Calibrated: 2010-05-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2010-07-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Dipole 1900MHz Validation/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 4.84 mW/g

Dipole 1900MHz Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 60.5 V/m; Power Drift = -0.054 dB
Peak SAR (extrapolated) = 7.29 W/kg
SAR(1 g) = 4.08 mW/g; SAR(10 g) = 2.11 mW/g
Maximum value of SAR (measured) = 4.55 mW/g

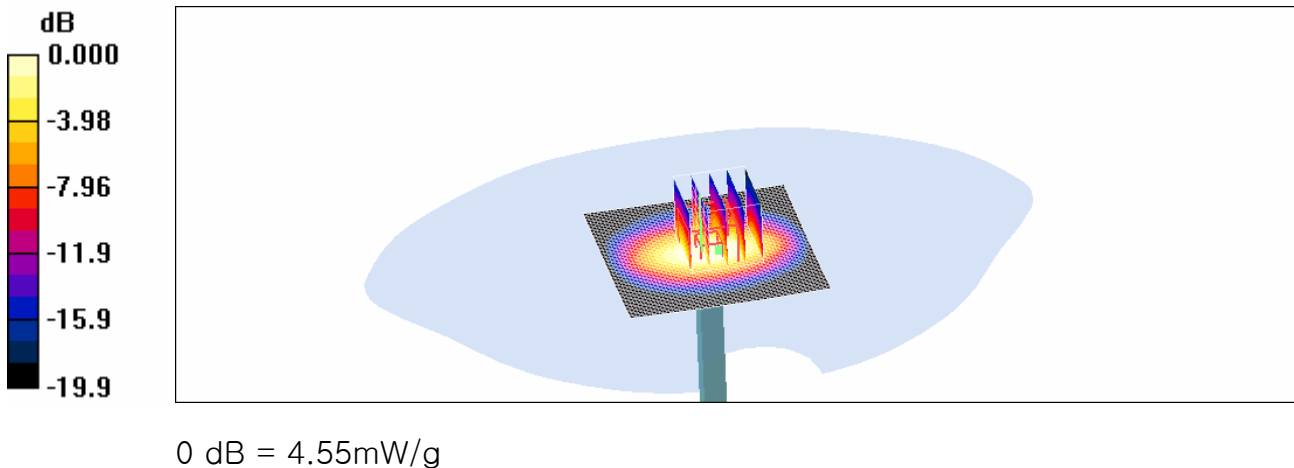

■ Dielectric Parameter (835 MHz Head)

Title LG-T320g
SubTitle GSM850(Head)
Test Date Aug.15, 2010

Frequency	e'	e''
800000000	42.1863	19.0204
805000000	42.151	18.8828
810000000	42.0565	18.8812
815000000	41.9339	18.8503
820000000	41.8681	18.7884
825000000	41.7766	18.7451
830000000	41.7009	18.6981
835000000	41.6333	18.6391
840000000	41.5596	18.6295
845000000	41.5164	18.6323
850000000	41.4714	18.6253
855000000	41.4	18.6671
860000000	41.381	18.6375
865000000	41.3937	18.6804
870000000	41.3231	18.7316
875000000	41.3887	18.7429
880000000	41.3353	18.7432
885000000	41.279	18.7645
890000000	41.2733	18.7509
895000000	41.2665	18.7822
900000000	41.223	18.8044

■ Dielectric Parameter (835 MHz Body)

Title LG-T320g
SubTitle GSM850(Body)
Test Date Aug.15, 2010

Frequency	e'	e''
800000000	56.7541	20.5879
805000000	56.7552	20.5908
810000000	56.6459	20.4881
815000000	56.6147	20.4769
820000000	56.5319	20.4939
825000000	56.5212	20.4402
830000000	56.5149	20.434
835000000	56.4253	20.4377
840000000	56.4184	20.4095
845000000	56.4033	20.3725
850000000	56.3696	20.364
855000000	56.3068	20.3411
860000000	56.2882	20.3466
865000000	56.2797	20.3597
870000000	56.235	20.3228
875000000	56.1609	20.3166
880000000	56.1401	20.2712
885000000	56.1527	20.259
890000000	56.111	20.2786
895000000	56.0431	20.2442
900000000	56.0098	20.2072

■ Dielectric Parameter (1900 MHz Head)

Title LG-T320g
SubTitle WCDMA1900(Head)
Test Date Aug.16, 2010

Frequency	e'	e''
1800000000	41.2821	12.9728
1810000000	41.2494	12.9822
1820000000	41.2456	13.0682
1830000000	41.2277	13.1109
1840000000	41.2029	13.1547
1850000000	41.1535	13.187
1860000000	41.0893	13.1804
1870000000	41.0335	13.2264
1880000000	40.9469	13.196
1890000000	40.8837	13.2173
1900000000	40.8347	13.2175
1910000000	40.7722	13.2271
1920000000	40.7604	13.2569
1930000000	40.7426	13.2849
1940000000	40.7044	13.3296
1950000000	40.7322	13.3681
1960000000	40.7271	13.405
1970000000	40.7385	13.451
1980000000	40.7193	13.4555
1990000000	40.6693	13.538
2000000000	40.5905	13.5219

■ Dielectric Parameter (1900 MHz Body)

Title LG-T320g
SubTitle WCDMA1900(Body)
Test Date Aug.16, 2010

Frequency	e'	e''
1850000000	53.9046	13.9624
1855000000	53.93	13.9555
1860000000	53.9196	13.9656
1865000000	53.8748	13.999
1870000000	53.875	13.9769
1875000000	53.792	14.0033
1880000000	53.7787	14.015
1885000000	53.7362	14.0263
1890000000	53.6677	14.0365
1895000000	53.6019	14.0264
1900000000	53.5901	14.067
1905000000	53.5288	14.0888
1910000000	53.4806	14.1158
1915000000	53.4261	14.1491
1920000000	53.4458	14.2053
1925000000	53.4125	14.2192
1930000000	53.4054	14.2386
1935000000	53.4282	14.287
1940000000	53.4391	14.2955
1945000000	53.4293	14.3542
1950000000	53.4806	14.3496

Attachment 3. – Probe Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **HCT (Dymstec)**

Certificate No: **ET3-1630_May10**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1630**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v6, QA CAL-23.v3 and QA CAL-25.v2**
Calibration procedure for dosimetric E-field probes

Calibration date: **May 25, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 25, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1630_May10

Page 1 of 11

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1630

May 25, 2010

Probe ET3DV6

SN:1630

Manufactured:	October 12, 2001
Last calibrated:	August 25, 2008
Recalibrated:	May 25, 2010

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1630

May 25, 2010

DASY/EASY - Parameters of Probe: ET3DV6 SN:1630

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu V/(V/m)^2$) ^A	1.65	1.63	1.63	± 10.1%
DCP (mV) ^B	93.1	92.2	92.5	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300.0	± 1.5%
			Y	0.00	0.00	1.00	300.0	
			Z	0.00	0.00	1.00	300.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ET3DV6 SN:1630

May 25, 2010

DASY/EASY - Parameters of Probe: ET3DV6 SN:1630

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ^C	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	7.20	7.20	7.20	0.21	2.26 ± 13.3%
835	± 50 / ± 100	41.9 ± 5%	0.89 ± 5%	6.25	6.25	6.25	0.50	2.09 ± 11.0%
900	± 50 / ± 100	41.5 ± 5%	0.97 ± 5%	6.13	6.13	6.13	0.52	2.09 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	5.38	5.38	5.38	0.51	2.57 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	5.12	5.12	5.12	0.72	2.10 ± 11.0%
1950	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.96	4.96	4.96	0.76	2.02 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.58	4.58	4.58	0.99	1.63 ± 11.0%

^C The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1630

May 25, 2010

DASY/EASY - Parameters of Probe: ET3DV6 SN:1630**Calibration Parameter Determined in Body Tissue Simulating Media**

f [MHz]	Validity [MHz] [©]	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	7.48	7.48	7.48	0.15	2.30 ± 13.3%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	6.17	6.17	6.17	0.42	2.43 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	4.77	4.77	4.77	0.66	2.88 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.55	4.55	4.55	0.87	2.41 ± 11.0%
1950	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.64	4.64	4.64	0.94	2.32 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.15	4.15	4.15	0.99	1.47 ± 11.0%


[©] The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1630

May 25, 2010

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

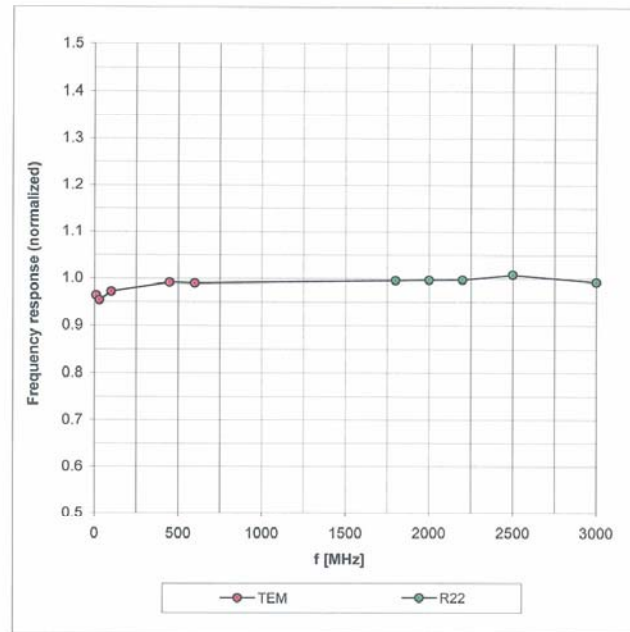


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1630

May 25, 2010

Receiving Pattern (ϕ), $\theta = 0^\circ$

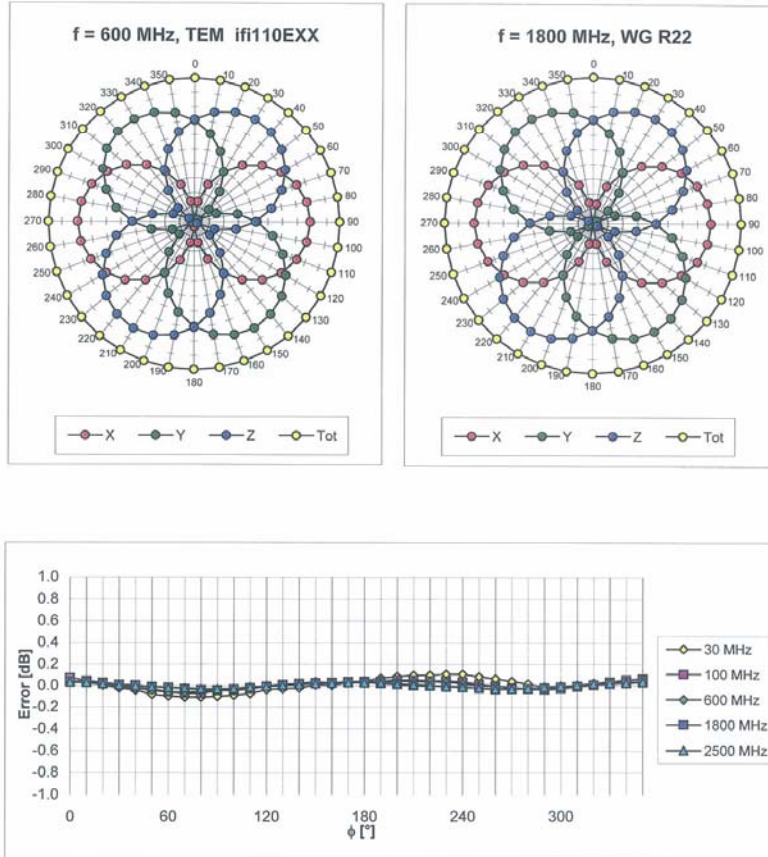


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6 SN:1630

May 25, 2010

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

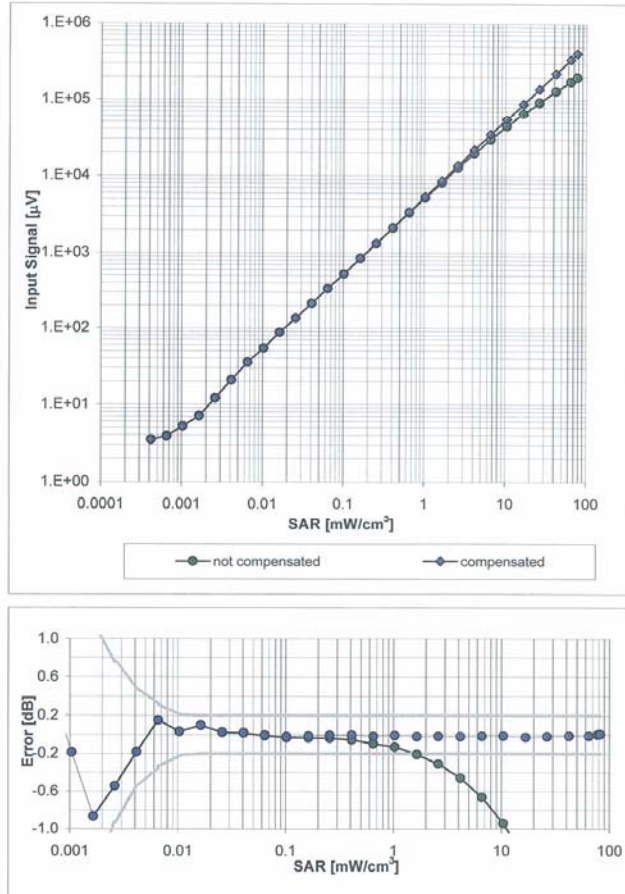


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1630


May 25, 2010

Conversion Factor Assessment

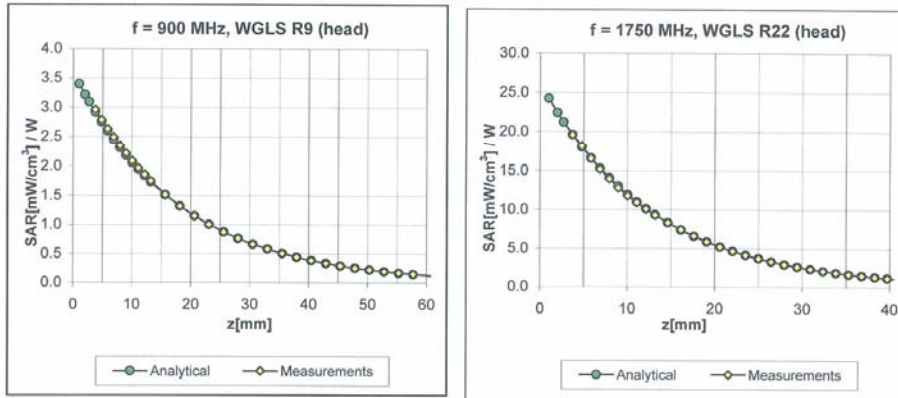

Deviation from Isotropy in HSL

Error (ϕ , θ), f = 900 MHz

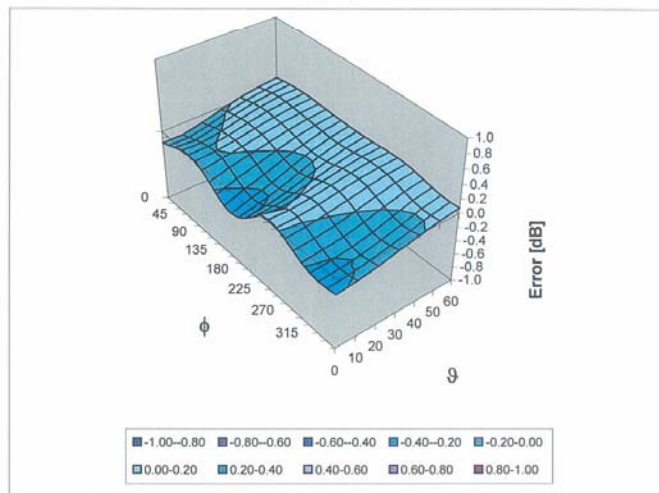

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

ET3DV6 SN:1630

May 25, 2010

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

Attachment 4. – Dipole Calibration Data