



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8539 FAX : +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

Applicant:

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu, Seoul
153-023, Korea

Date of Issue: October 07, 2010

Test Report No.: HCTE1010FE16

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:
IC

BEJT320G
2703C-T320G

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B
: ICES-003 Issue 4
Equipment Type : Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
FCC / IC Model : LG-T320g
FCC / IC Additional Model(s) : T320g, T320gv, LG-T320gv / T320g
FCC Listing No : 90661
IC Recognition No : IC 5944A-1
Port / Connector(s) : USB Data Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

Report prepared by
: Dong Sup Kim
Test Engineer of EMC Tech. Part

Approved by
: Kyoung Hee Yoon
Manager of EMC Tech. Part

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details	4
1.4 Cable description	5
1.5 Noise suppression parts on cable. (I/O cable)	5
1.6 Test methodology	6
1.7 Test facility	6
1.8 Frequency Range of Radiated Measurements	6
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	7
3. PRELIMINARY TEST	
3.1 Conducted Emission test	8
3.2 Radiated Emission test	8
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	9
4.2 Radiated Emission test	14
5. FIELD STRENGTH CALCULATION	15
6. TEST EQUIPMENT	16
7. CONCLUSION	17

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test (E.U.T) is **Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth**,
Model: LG-T320g manufactured by **LG Electronics Inc.** Its basic purpose is used for communications.

FCC/ IC Model	LG-T320g
FCC/ IC Additional Model(s)	T320g, T320gv, LG-T320gv / T320g
FCC ID / IC	BEJT320G / 2703C-T320G
E.U.T Type	Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Serial Number	FCC ID / DoC	Connected To
Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth	LG	LG-T320g	BEJT320G	Notebook PC
Notebook PC	HP	Compaq510 CNU9369Y0K	DoC	E.U.T
Notebook PC adaptor	HP	PA-1650-32HL PPP009L-E	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
Headset	-	-	-	E.U.T
USB Cable	-	-	-	Notebook PC E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth	Headset jack	-	N	(D)1.1
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The 10 m semi anechoic chamber used to collect the radiated data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si, Kyongki-Do, 467-701, South Korea, and the conducted measurement facility used to measure the conducted data are located at San 136-1, Ami-Ri Bubal-Eup, Icheon-Si, Kyongki-Do, 467-701, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facilities was submitted to the Commission and accepted dated Sep. 03, 2010 (Registration Number:90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

- Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor.
Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.
- Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi anechoic chamber.

[Configuration of Tested System]

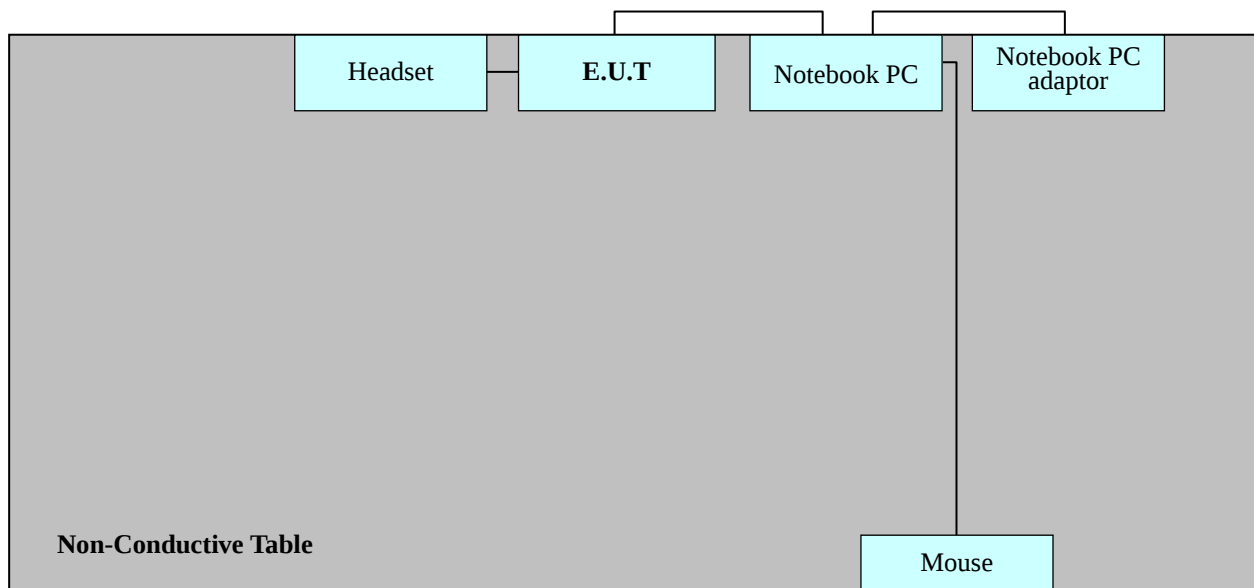

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- Test E.U.T with Data Communication mode, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

3. 2 Radiated Emission Test

- Test E.U.T with Data Communication mode, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 13.4 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 25.2 °C
Humidity level	: 43.9 %
Test date	: September 30, 2010

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Detector	Limit (dB μ V)	Margin (dB)
0.2020	40.2	HOT	Average	54.0	13.4
0.2060	47.3	NEUTRAL	Quasi-Peak	63.0	16.1
0.2060	48.7	HOT	Quasi-Peak	63.0	14.7
0.2660	35.0	NEUTRAL	Average	51.0	16.3

※ **NOTE:** Refer to page 10 to page 13 for details.


HCT

EMC

EUT: T320g
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DS-KIM
Test Specification: CISPR22 CLASS B
Comment: H

SCAN TABLE: "CISPR22 CLASS B"

Short Description:				CISPR 22 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

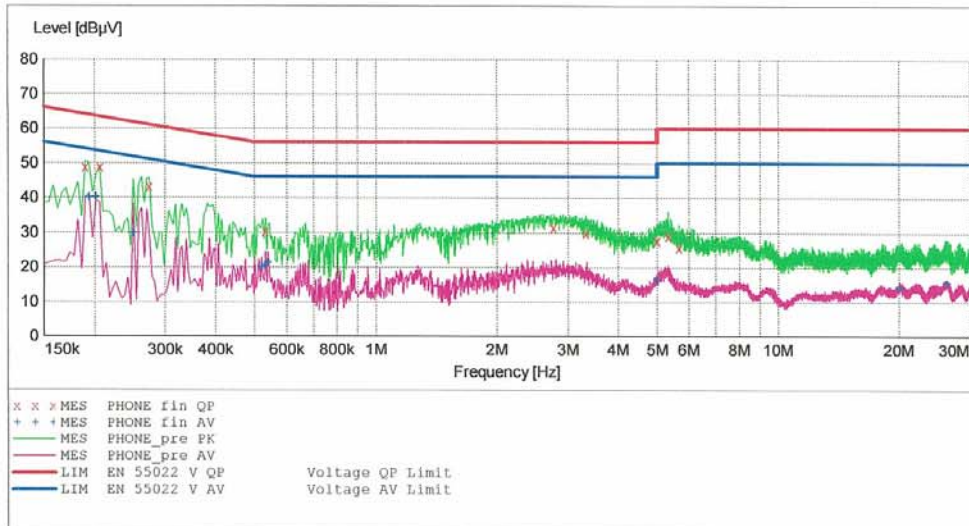

MEASUREMENT RESULT: "PHONE_fin QP"

9/30/2010 4:46PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.190000	48.80	10.1	64	15.2	---	---
0.206000	48.70	10.1	63	14.7	---	---
0.274000	43.20	10.1	61	17.8	---	---
0.532000	30.60	10.1	56	25.4	---	---
2.768000	31.60	10.3	56	24.4	---	---
3.336000	30.00	10.3	56	26.0	---	---
5.000000	27.70	10.5	56	28.3	---	---
5.324000	29.10	10.5	60	30.9	---	---
5.660000	25.80	10.5	60	34.2	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

9/30/2010 4:46PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.194000	40.00	10.1	54	13.9	---	---
0.202000	40.20	10.1	54	13.4	---	---
0.250000	29.80	10.1	52	22.0	---	---
0.520000	20.10	10.1	46	25.9	---	---
0.532000	20.60	10.1	46	25.4	---	---
0.540000	21.40	10.1	46	24.6	---	---
5.000000	16.50	10.5	46	29.5	---	---
20.056000	14.20	11.6	50	35.8	---	---
26.268000	15.50	11.8	50	34.5	---	---


HCT

EMC

EUT: T320g
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DS-KIM
Test Specification: CISPR22 CLASS B
Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Short Description:				CISPR 22 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

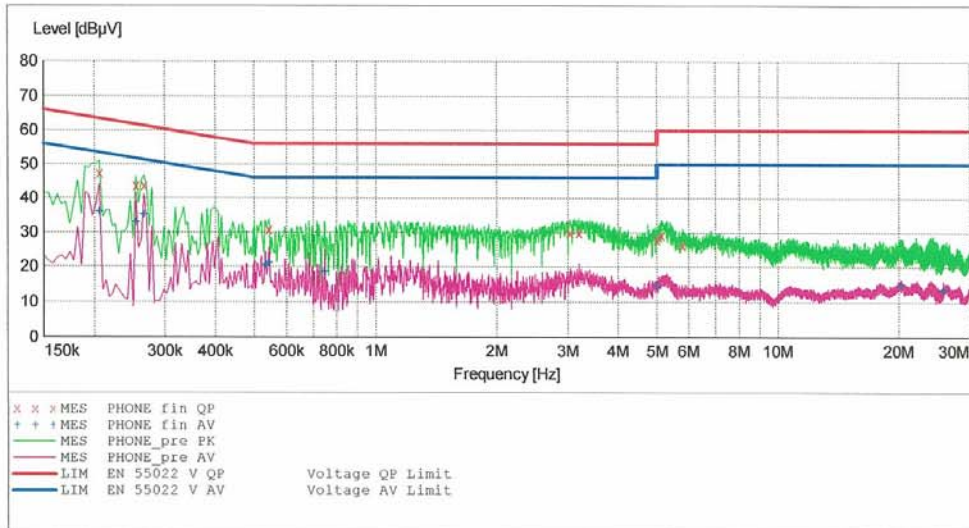

MEASUREMENT RESULT: "PHONE_fin QP"

9/30/2010 4:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.206000	47.30	10.1	63	16.1	---	---
0.254000	43.70	10.1	62	17.9	---	---
0.266000	43.70	10.1	61	17.5	---	---
0.544000	30.90	10.1	56	25.1	---	---
3.044000	29.90	10.3	56	26.1	---	---
3.208000	30.00	10.3	56	26.0	---	---
5.000000	28.10	10.5	56	27.9	---	---
5.148000	29.30	10.5	60	30.7	---	---
5.804000	26.30	10.5	60	33.7	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

9/30/2010 4:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.206000	36.00	10.1	53	17.3	---	---
0.254000	33.00	10.1	52	18.6	---	---
0.266000	35.00	10.1	51	16.3	---	---
0.532000	20.50	10.1	46	25.5	---	---
0.544000	21.10	10.1	46	24.9	---	---
0.748000	18.70	10.1	46	27.3	---	---
5.000000	14.60	10.5	46	31.4	---	---
20.220000	14.70	11.6	50	35.3	---	---
25.812000	13.40	11.7	--	--	.	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 7.9 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 22.0 °C
Humidity level	: 49.7 %
Test date	: October 01, 2010

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
50.5	16.7	12.4	0.9	V	30.0	40.0	10.0
121.4	22.3	11.9	1.4	V	35.6	43.5	7.9
228.9	17.8	10.7	1.9	H	30.4	46.0	15.6
230.2	19.3	10.8	1.9	V	32.0	46.0	14.0
250.8	17.8	11.6	2.0	H	31.4	46.0	14.6
350.9	15.9	14.2	2.3	H	32.4	46.0	13.6

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Serial Number</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>				
EMI Test Receiver	Rohde & Schwarz	ESCI	100033	2011.02.19
LISN	Rohde & Schwarz	ESH3-Z5	100282	2011.02.05
LISN	Rohde & Schwarz	ENV216	3560.6550.02	2011.04.06
Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.52	2010.10.30
<u>Radiated Emission</u>				
EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	2010.10.30
EMI Test Receiver	Rohde & Schwarz	ESU26	100214	2011.04.29
Trilog Antenna	Schwarzbeck	VULB9160	3301	2012.07.22
Antenna master	INNCO Systems	MA4000-EP	MA4000/283	-
Turn Table	INNCO Systems	DT3000-3T	DT3000/69	-
Communication Antenna	Schwarzbeck	USLP9142	9142-248	-
Base Station	Rohde & Schwarz	CMU 200	1100000802	2011.02.17
Horn Antenna	Schwarzbeck	BBHA 9120D	-	2012.04.13
RF-Amplifier	MITEQ	AMF-6D-00101800 -35.20P.PS	-	2011.05.20
Bluetooth Base Station	TESCOM	TC-3000A	-	2011.01.07

7. CONCLUSION

The data collected shows that the **LG Electronics Inc, Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth, FCC Model: LG-T320g, FCC ID: BEJT320G** complies with §15.107 and §15.109 of the FCC rules. **IC Model: LG-T320g, IC: 2703C-T320G** complies with ICES-003 Issue 4 of the IC rule.