




11ax_HE20_26T

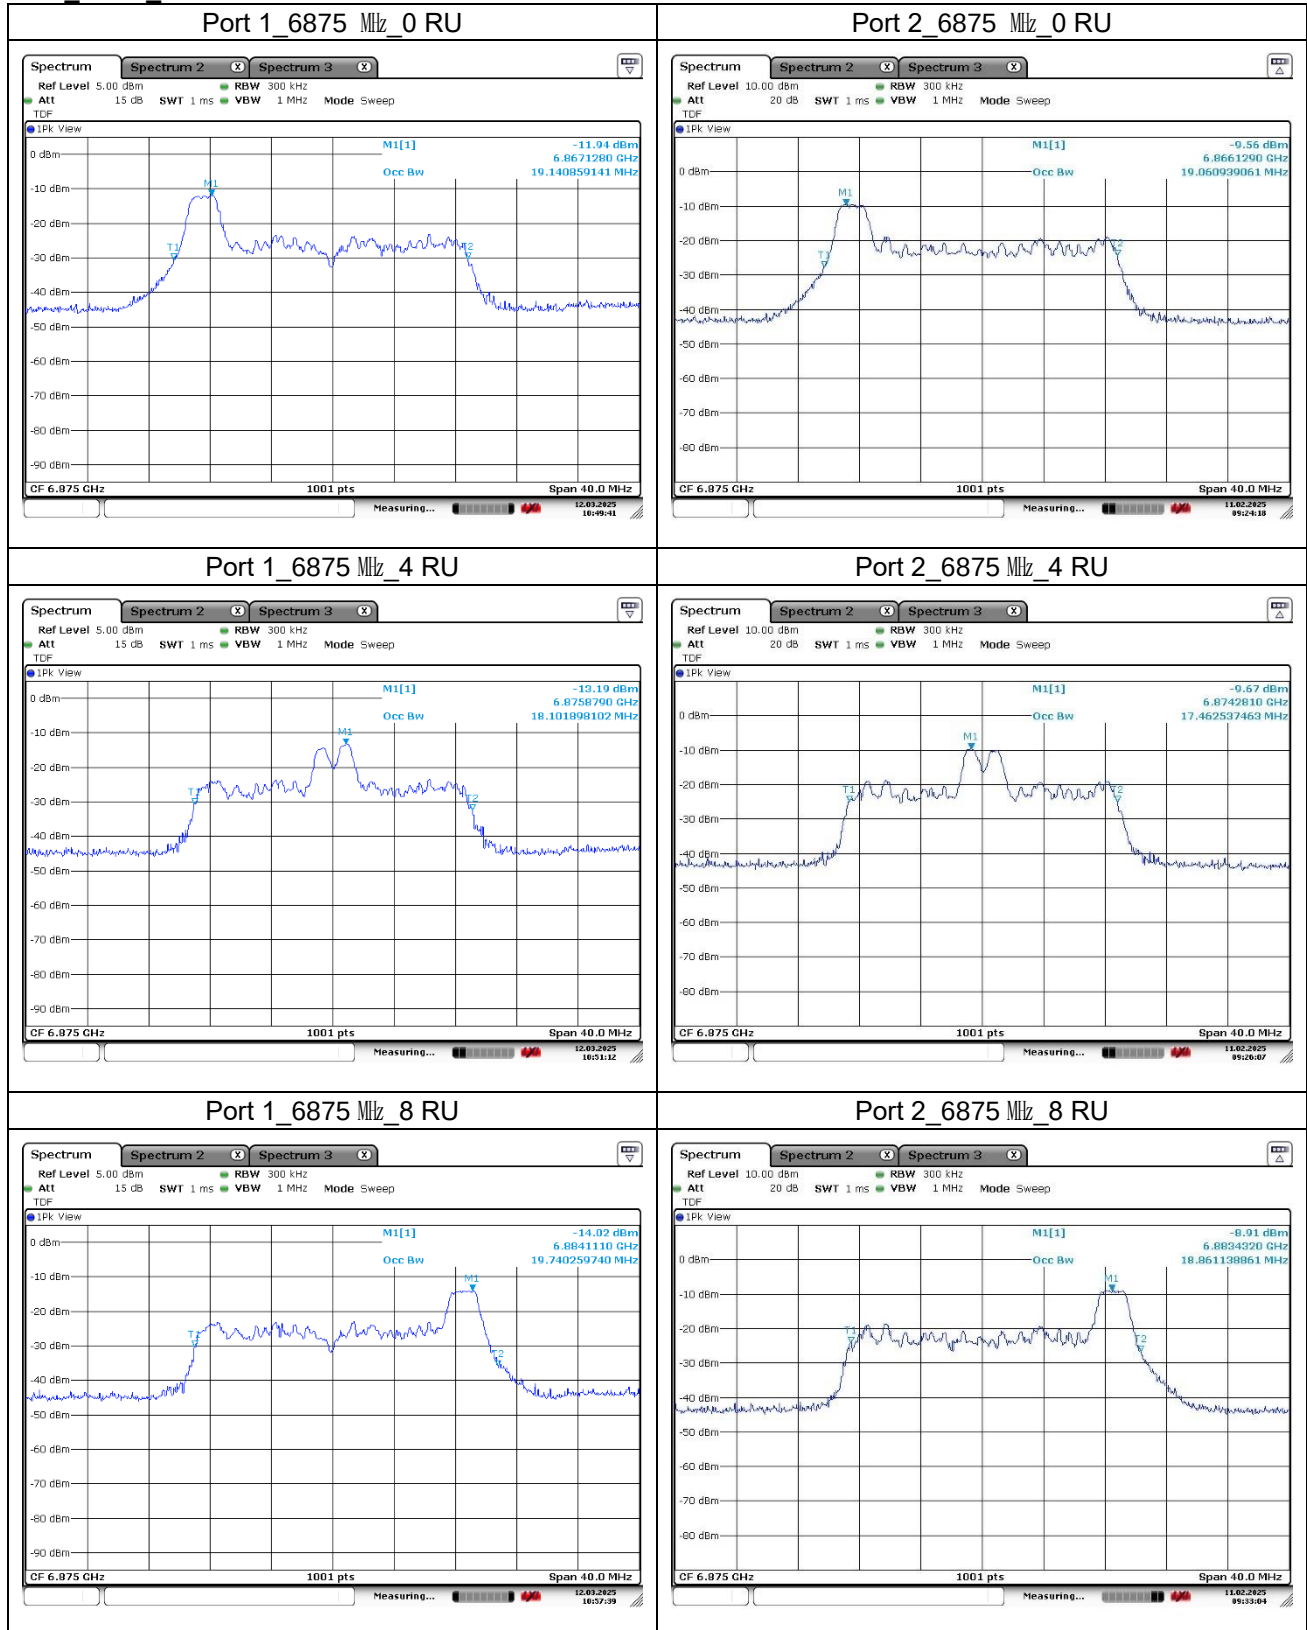


11ax_HE40_26T

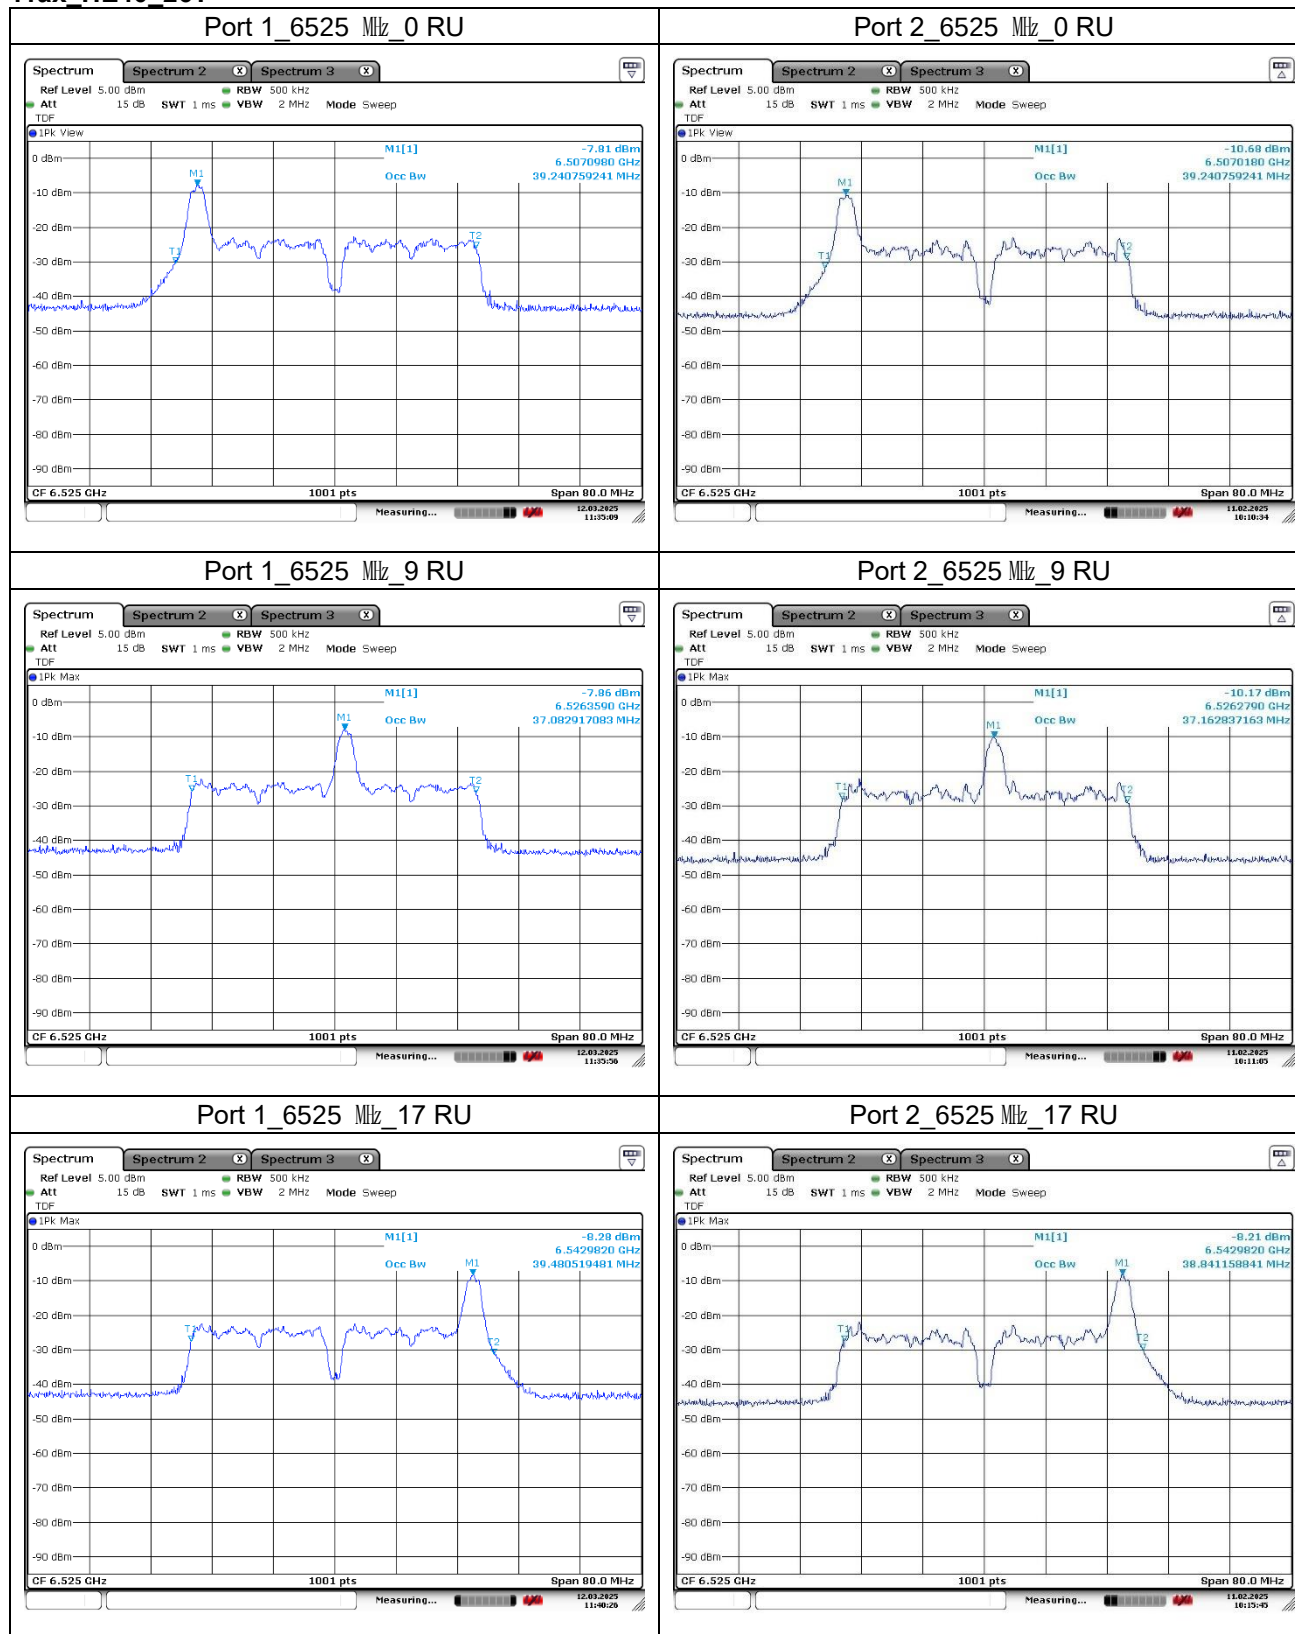


11ax_HE40_26T

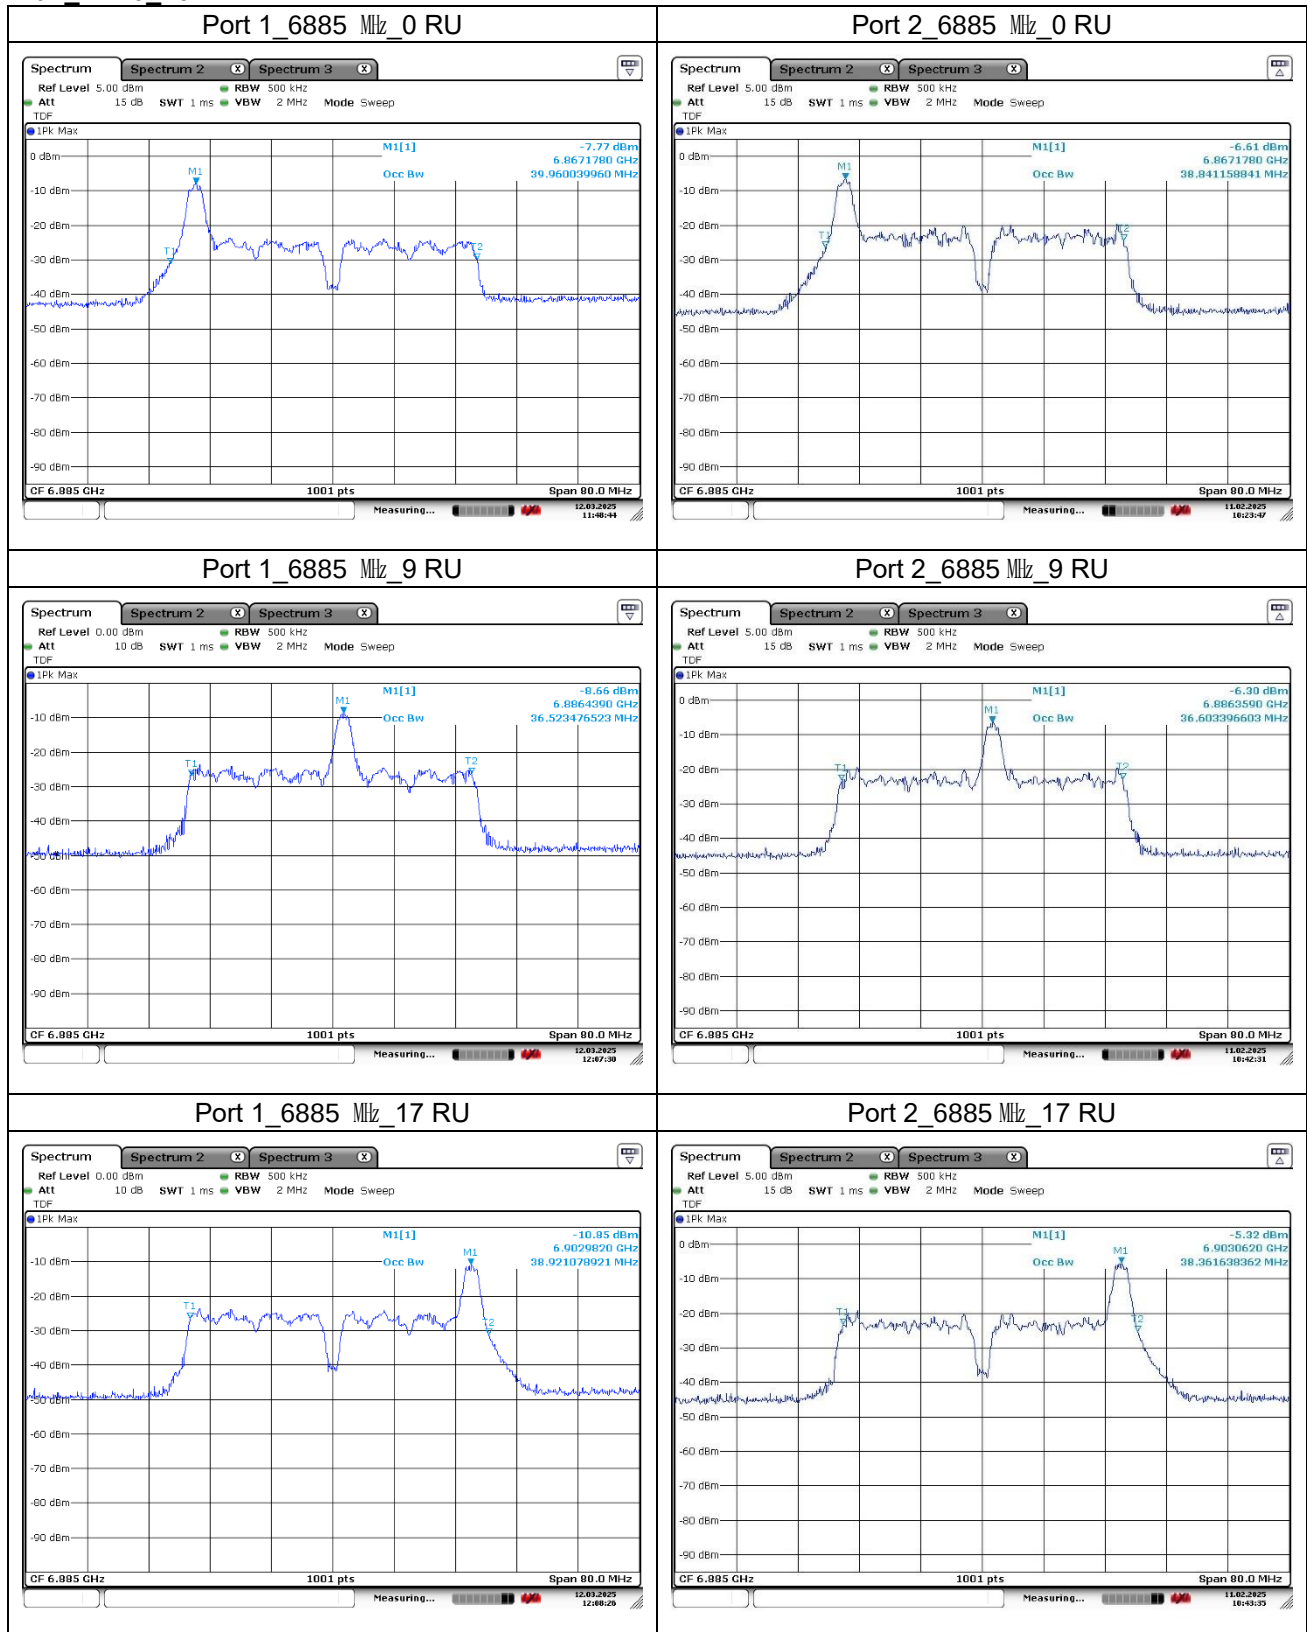


11ax_HE80_26T

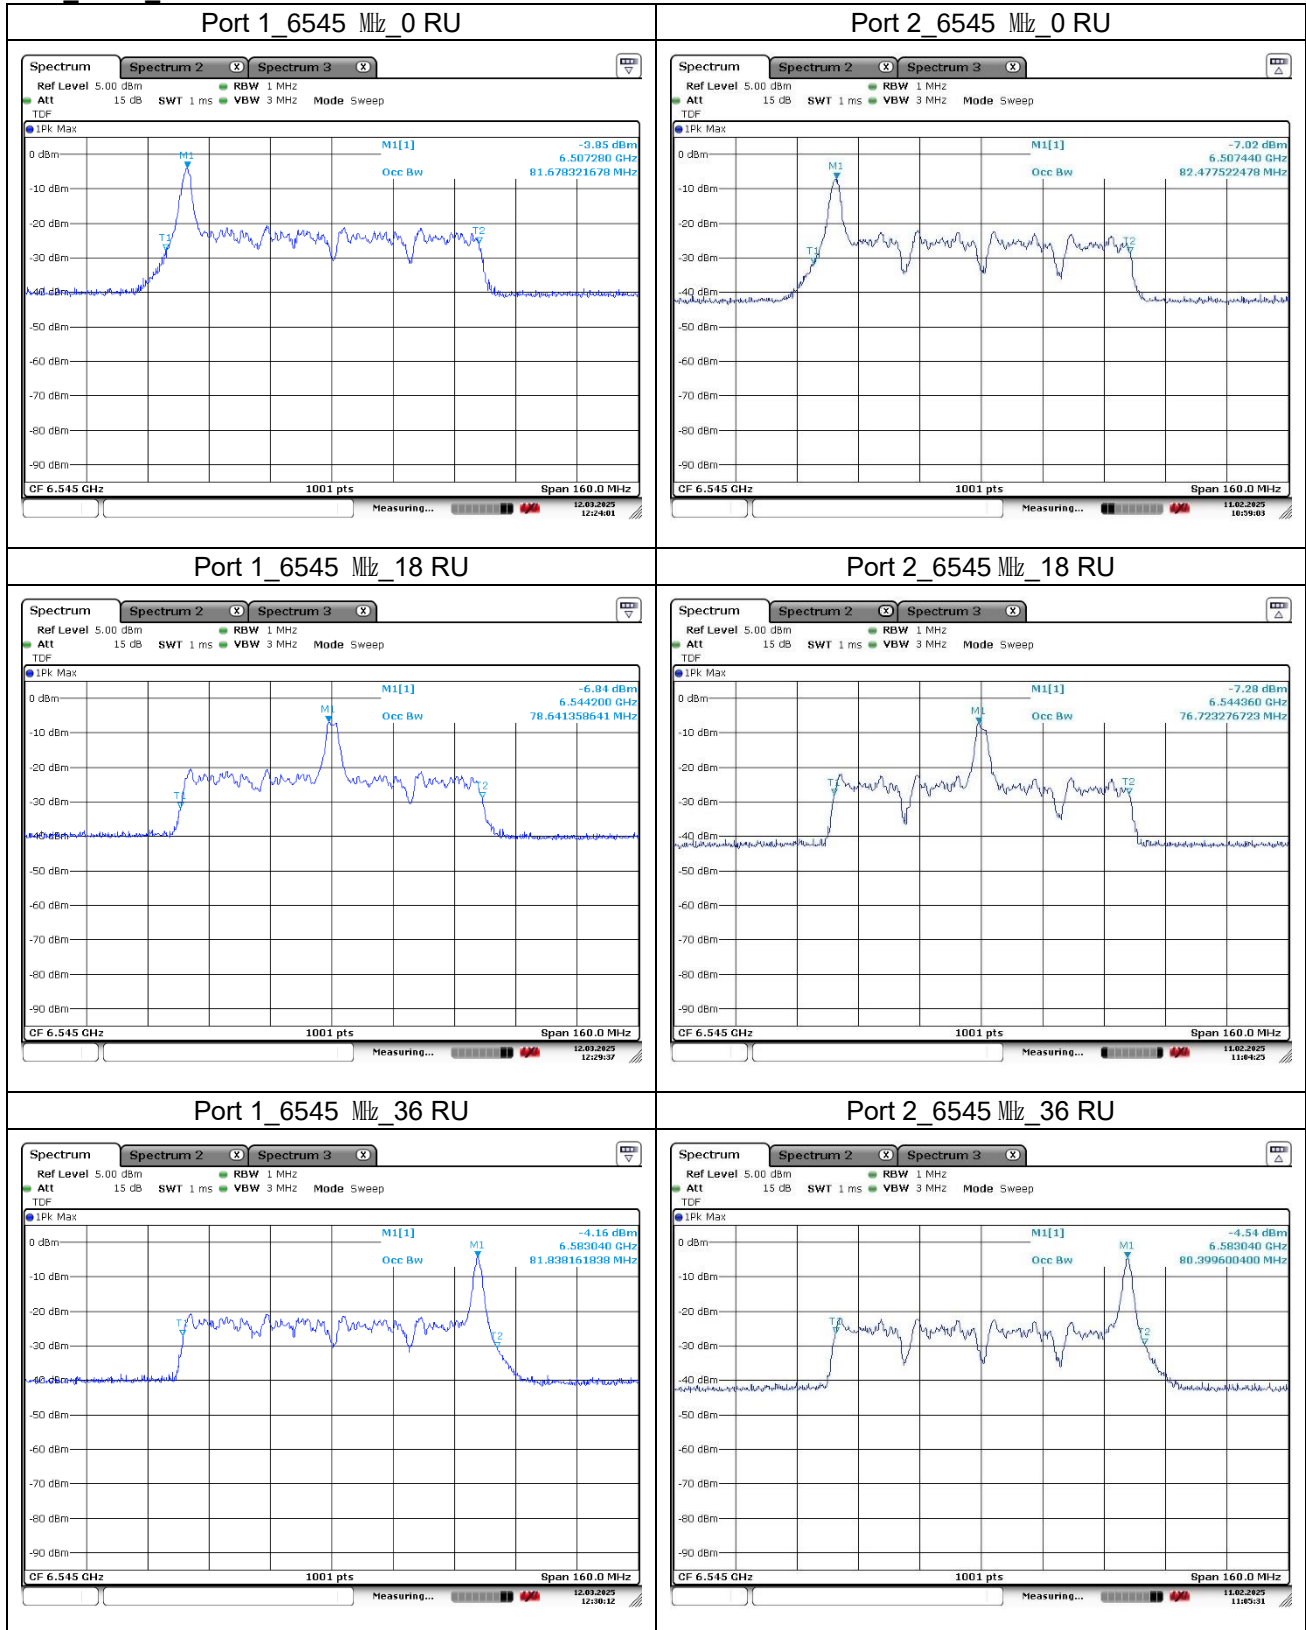


11ax_HE80_26T

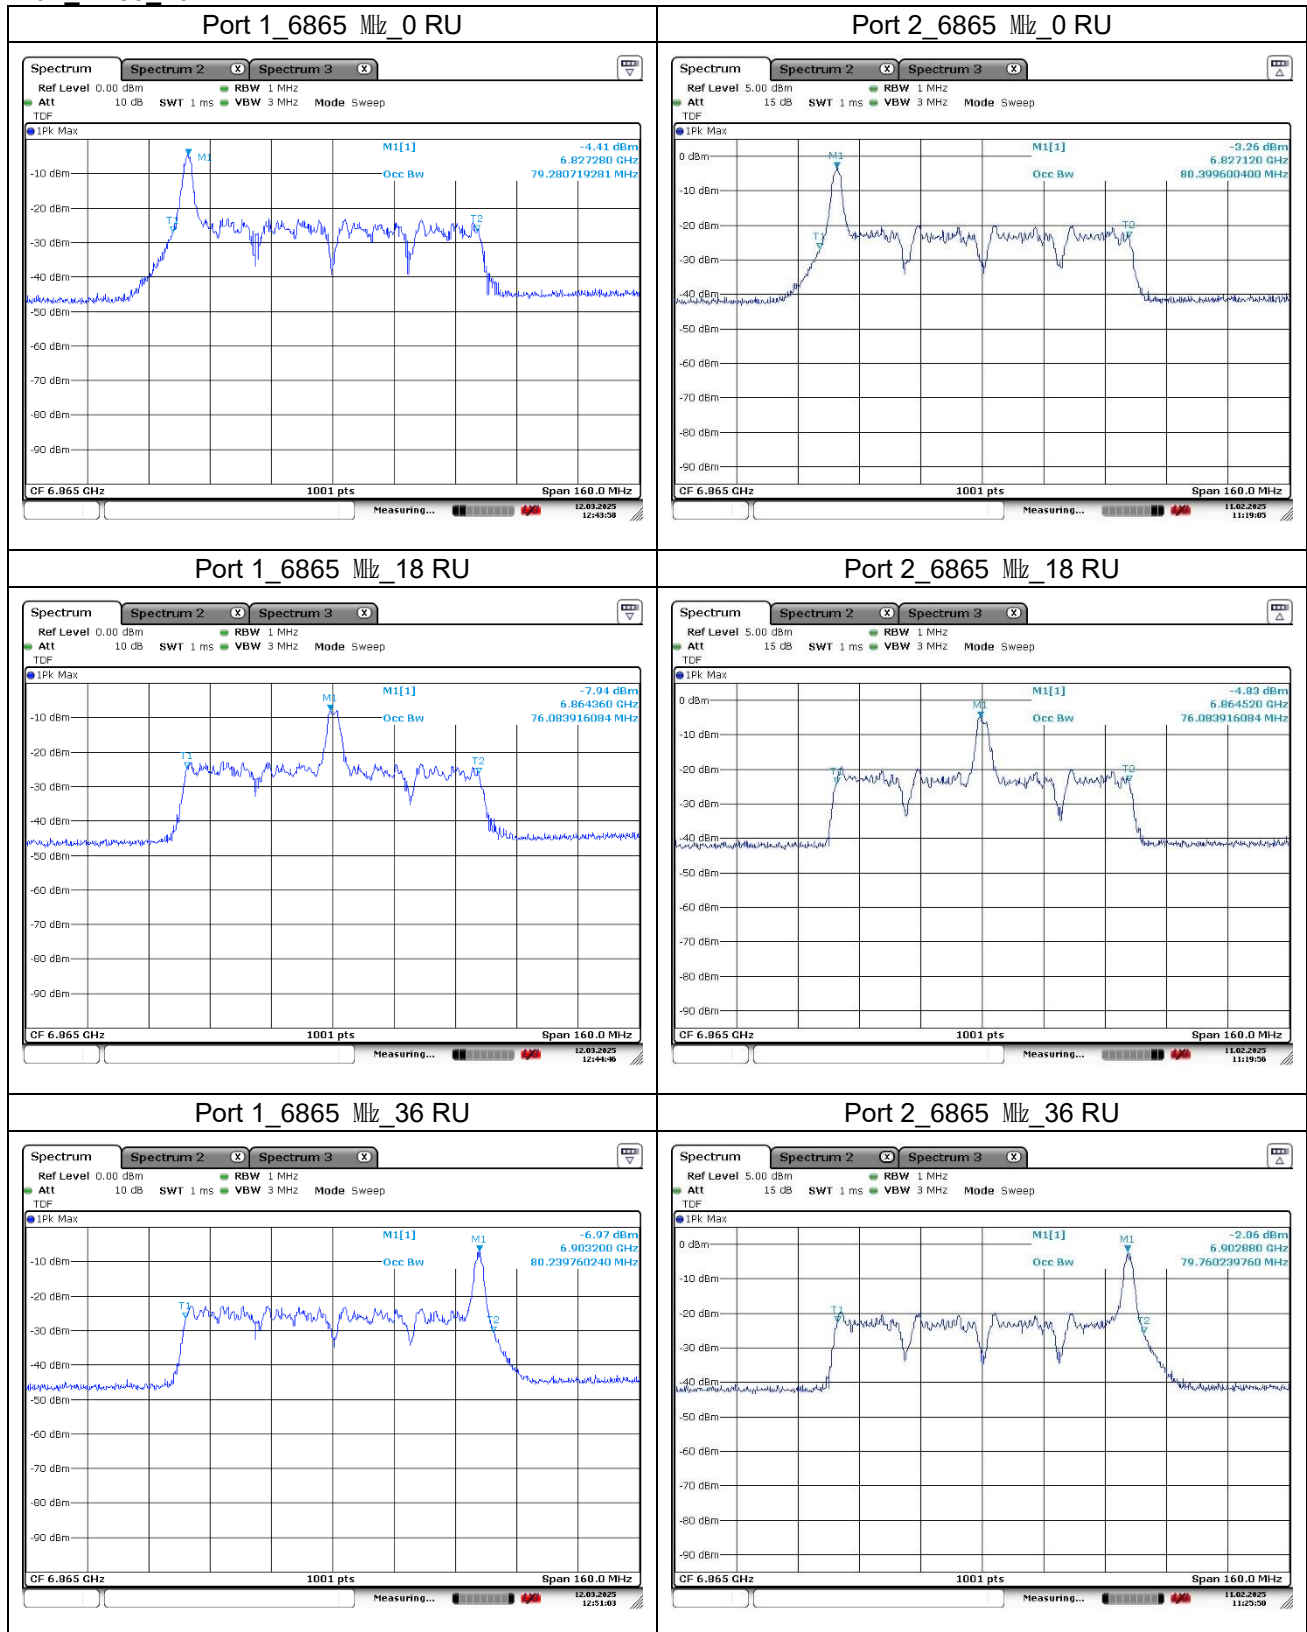


11ax_HE80L_26T

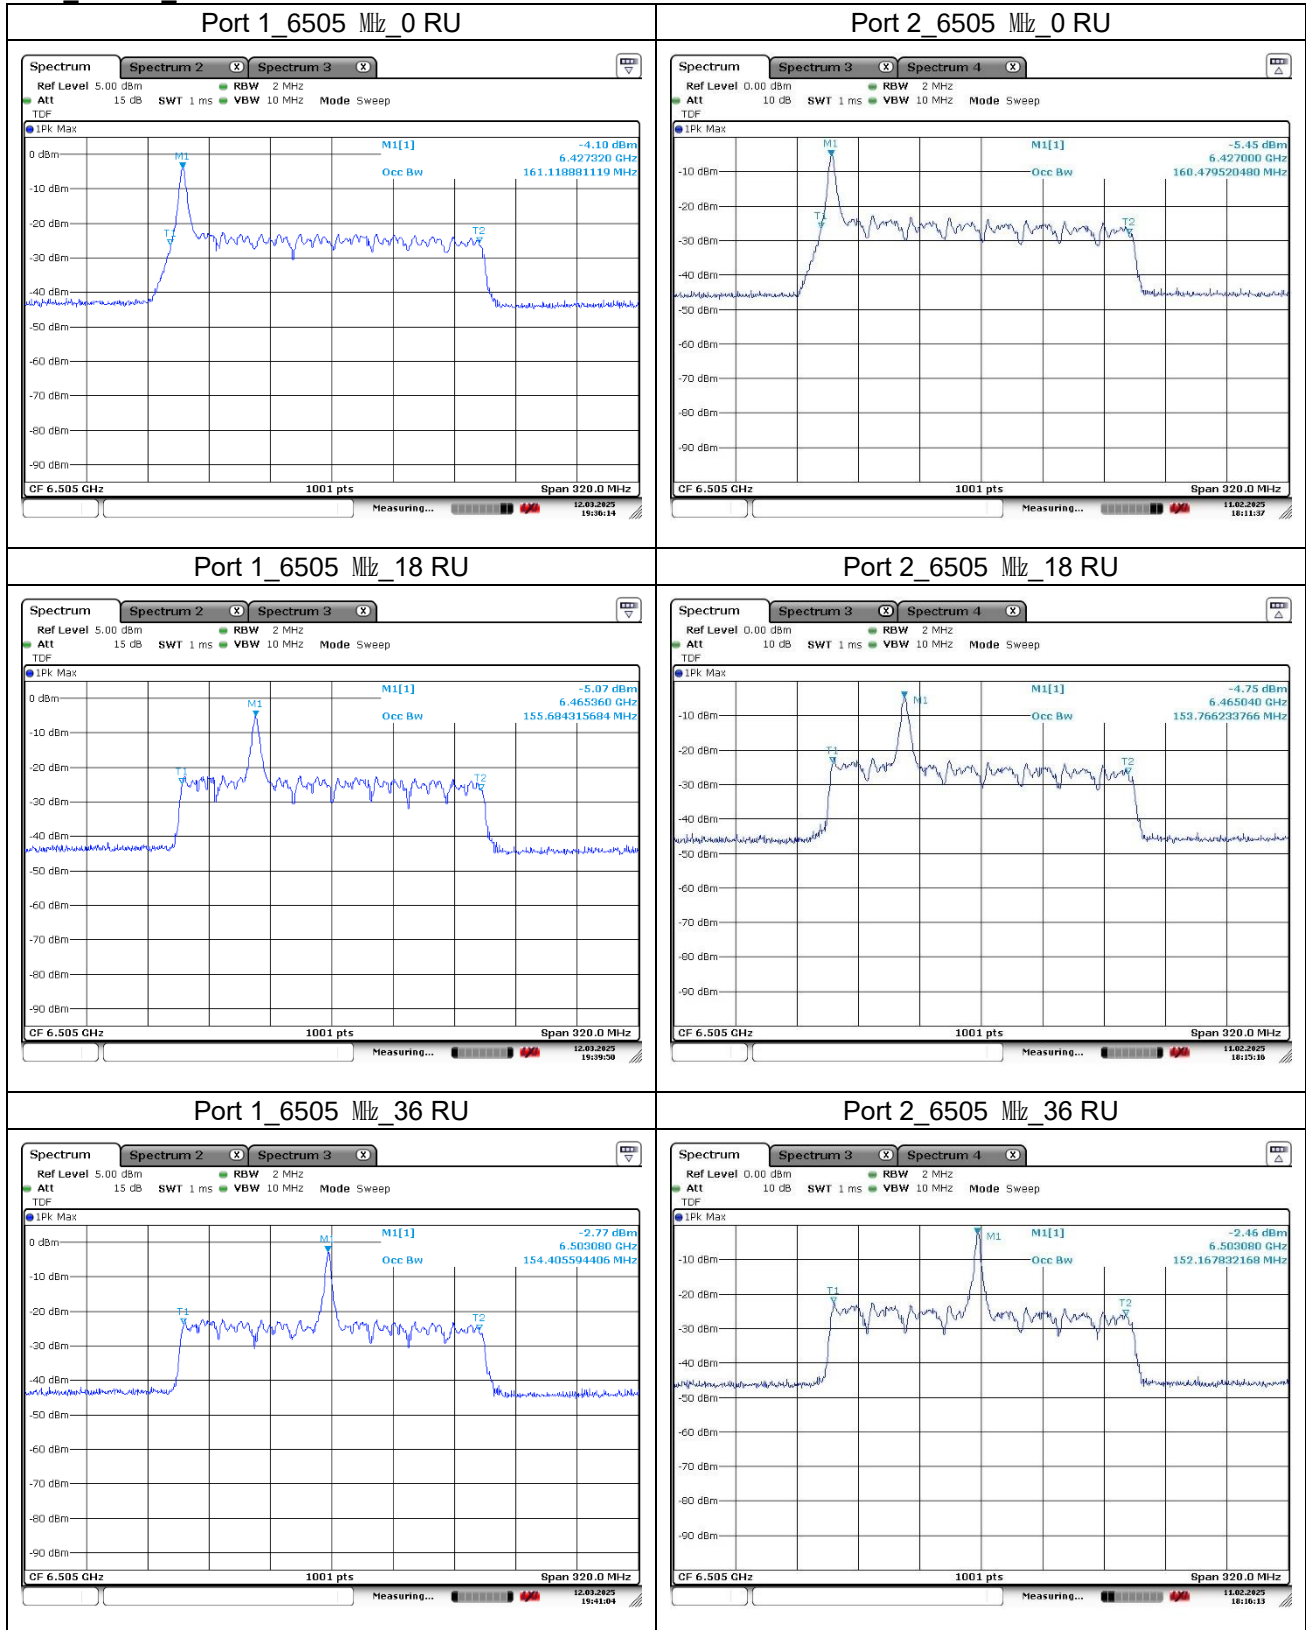


Port 1_6825 MHz_0 RU

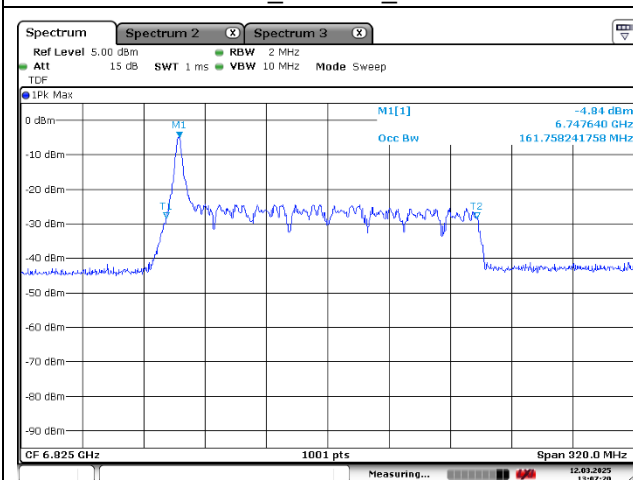


Port 2_6825 MHz_0 RU

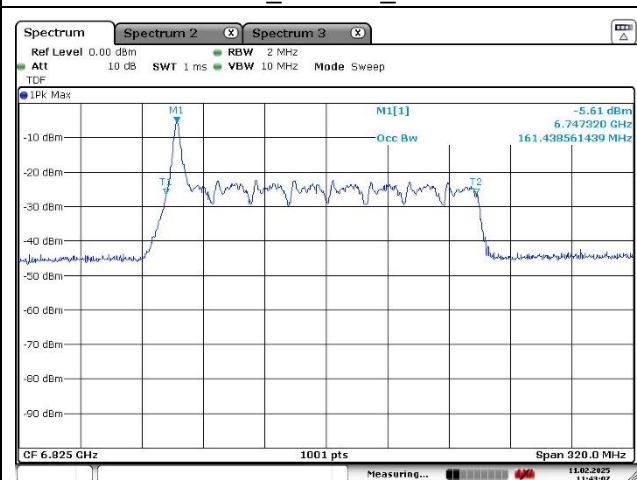


Port 1_6825 MHz_18 RU

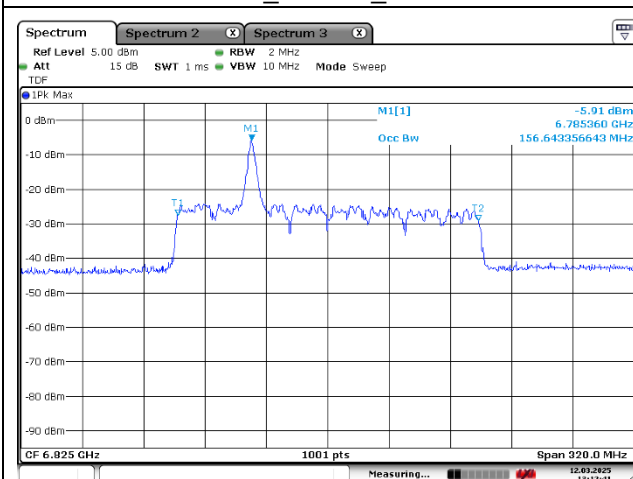


Port 2_6825 MHz_18 RU

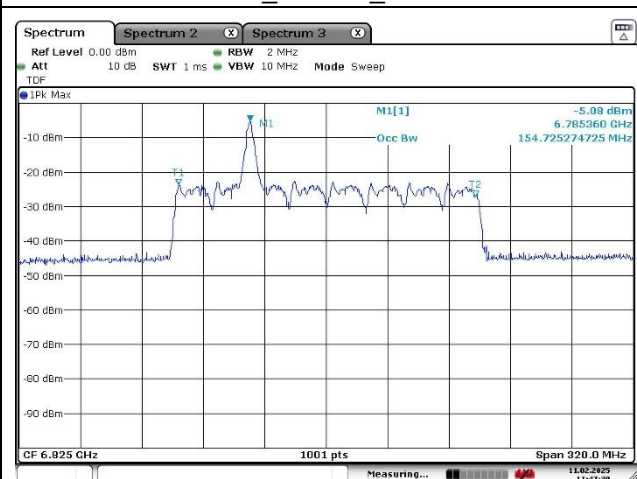


Port 1_6825 MHz_36 RU

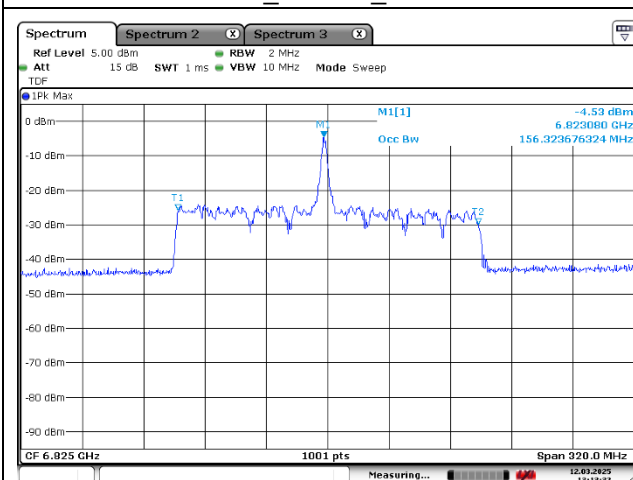


Port 2_6825 MHz_36 RU

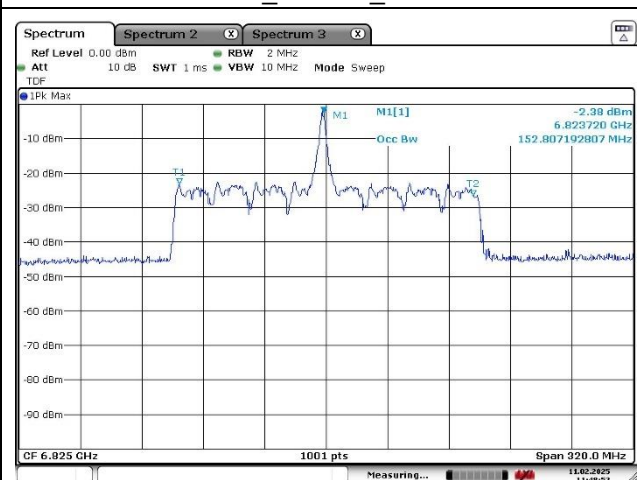


11ax_HE80U_26T

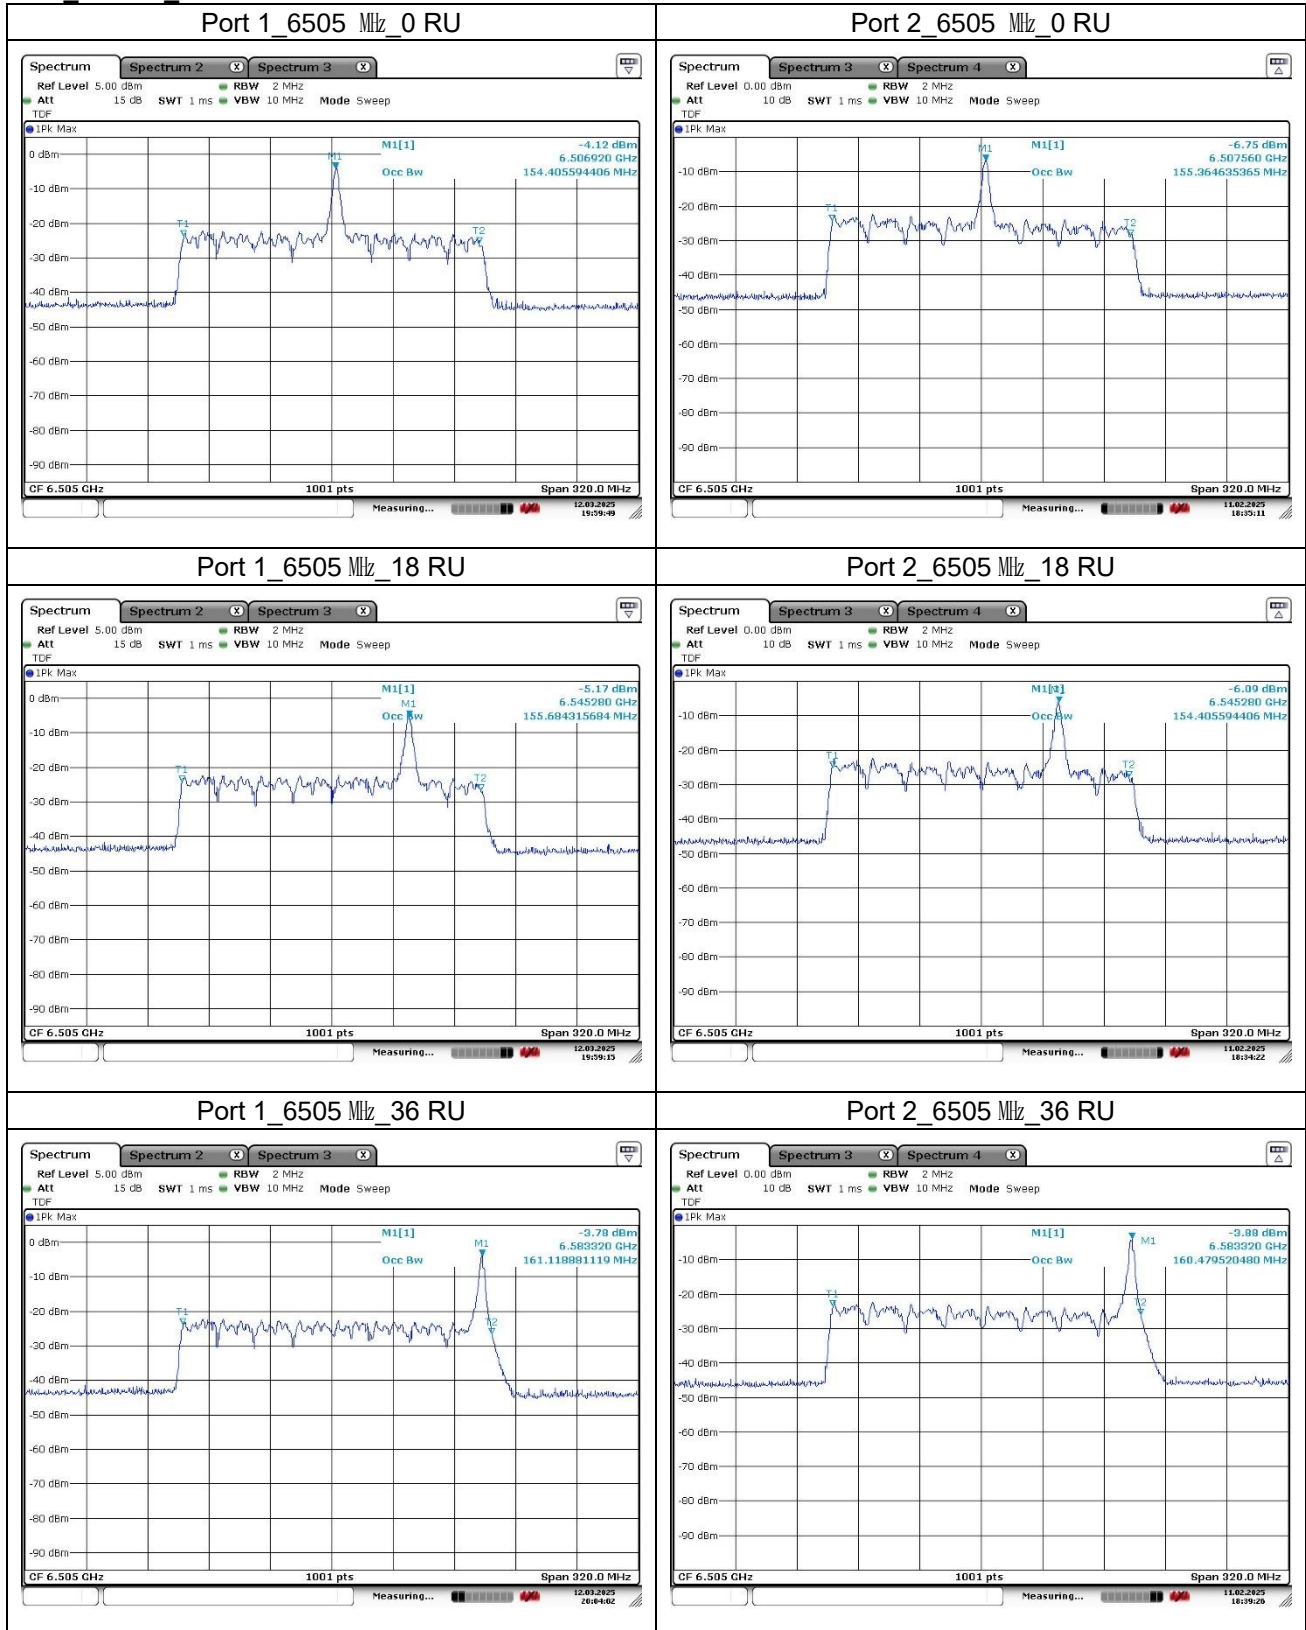


Port 1_6825 Mhz_0 RU

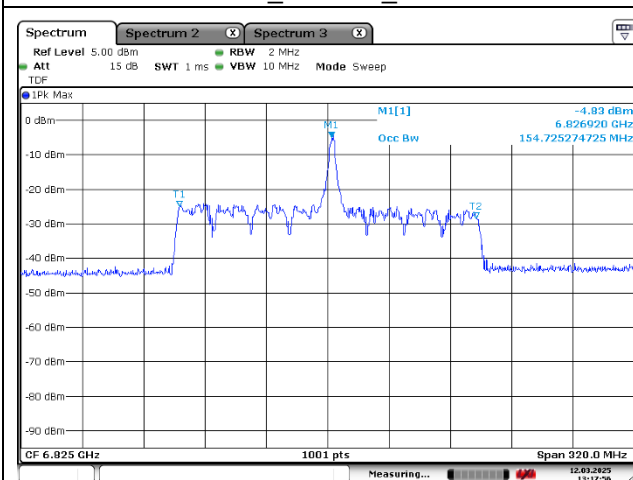


Port 2_6825 Mhz_0 RU

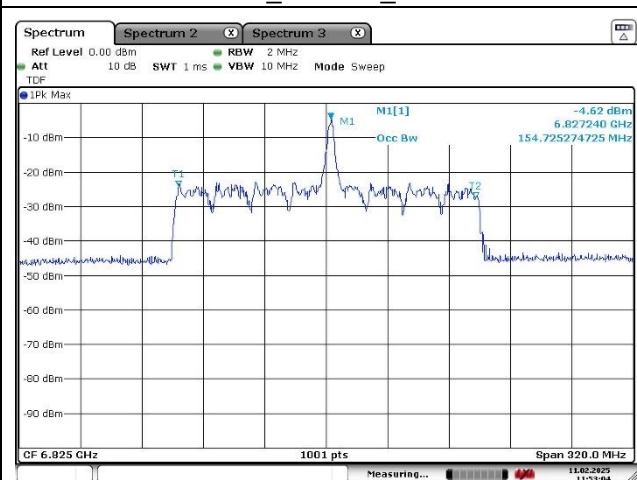


Port 1_6825 Mhz_18 RU

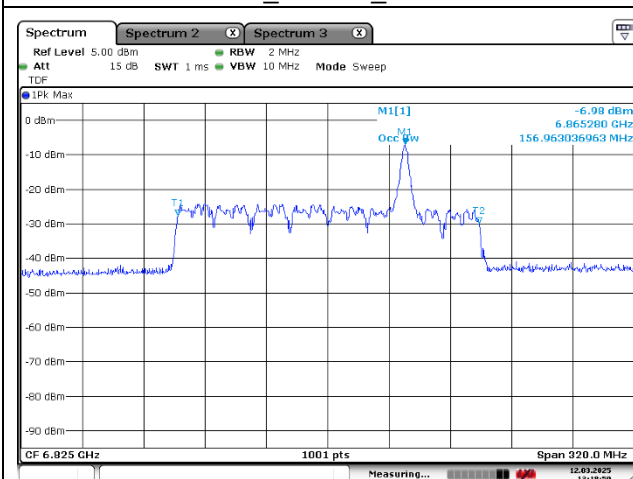


Port 2_6825 Mhz_18 RU

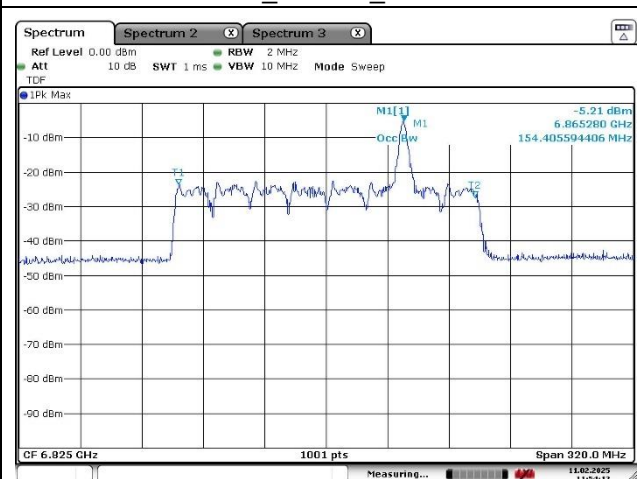


Port 1_6825 Mhz_36 RU

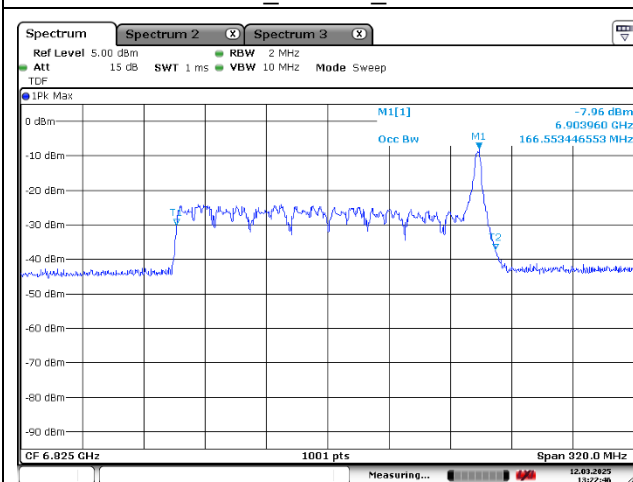


Port 2_6825 Mhz_36 RU

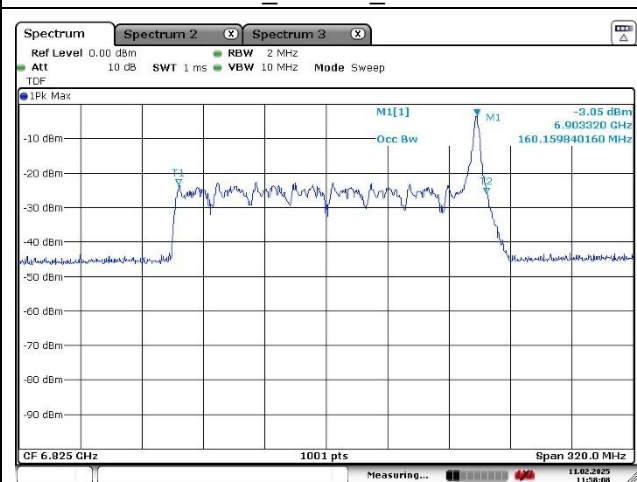


11ax_HE20_SU

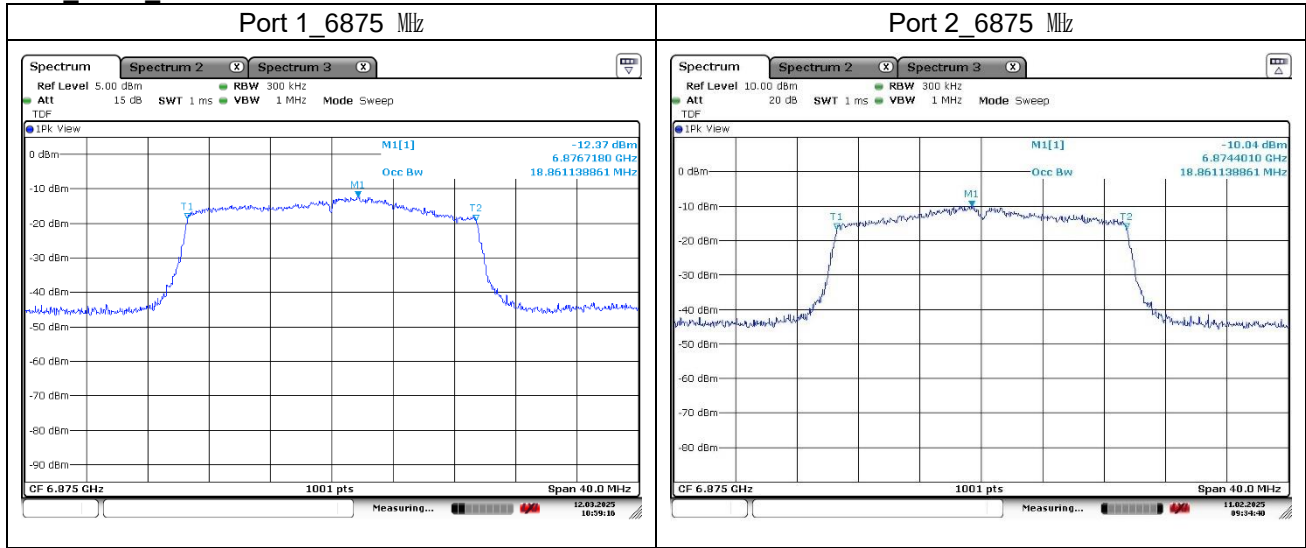


11ax_HE40_SU

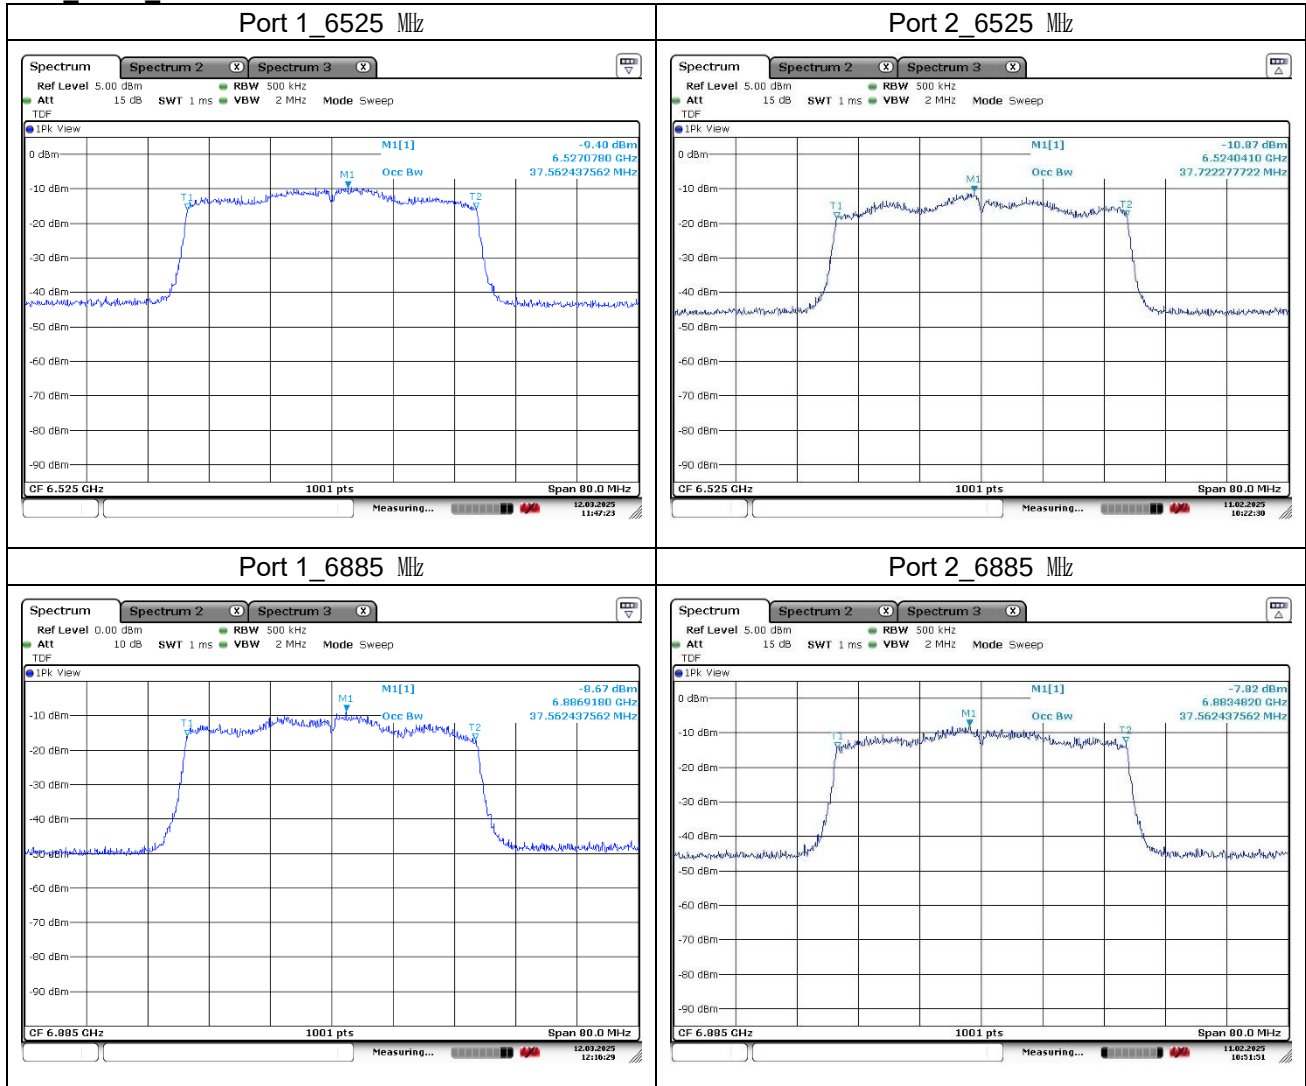

11ax_HE80_SU

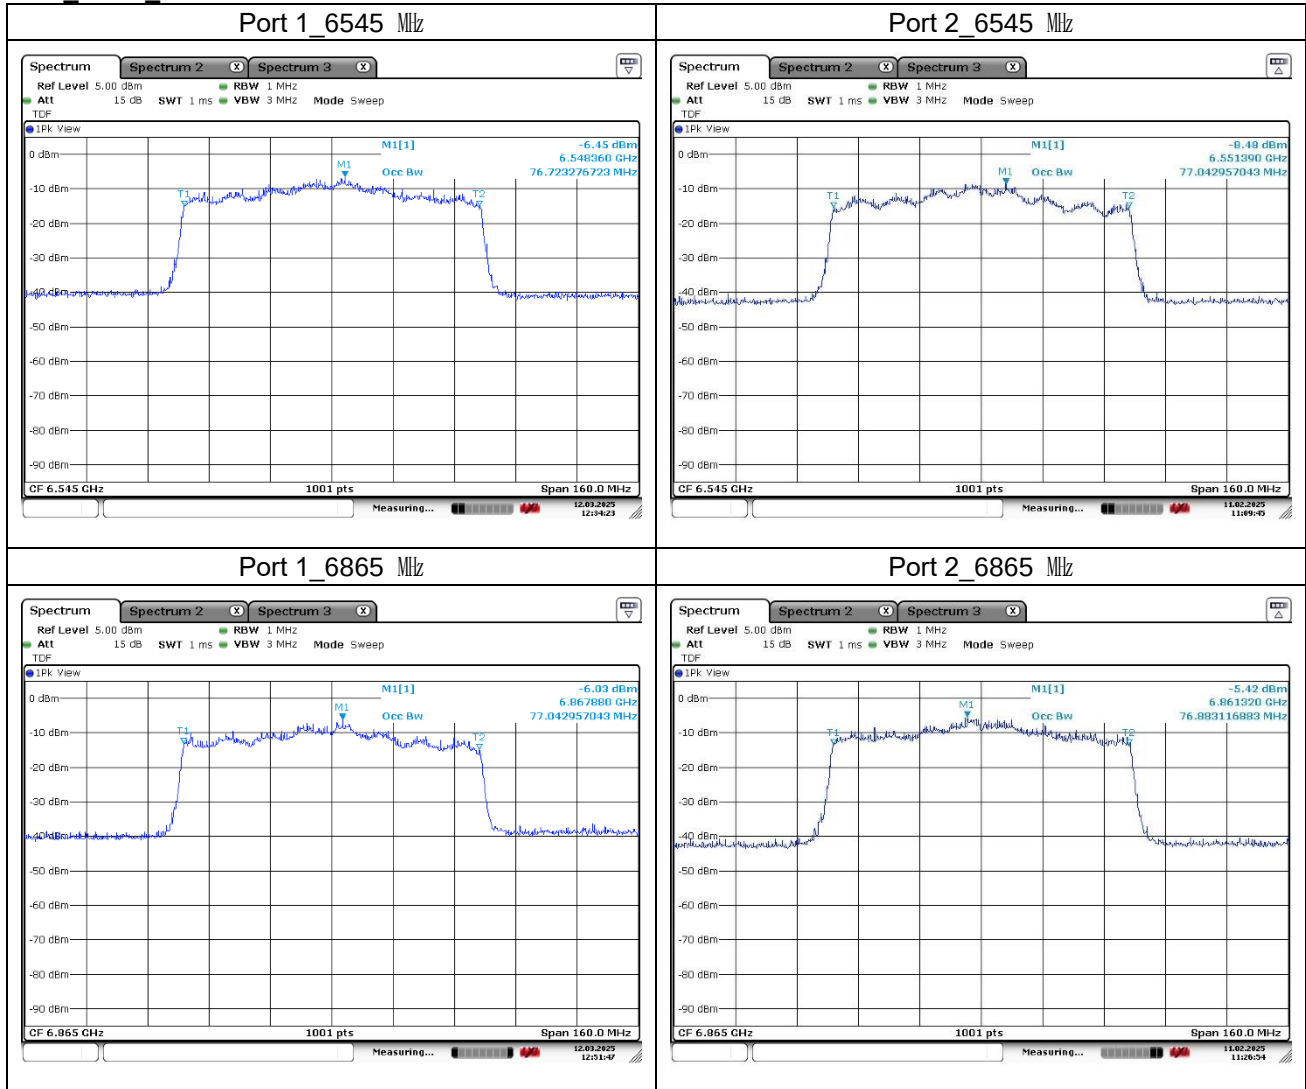


11ax_HE160_SU

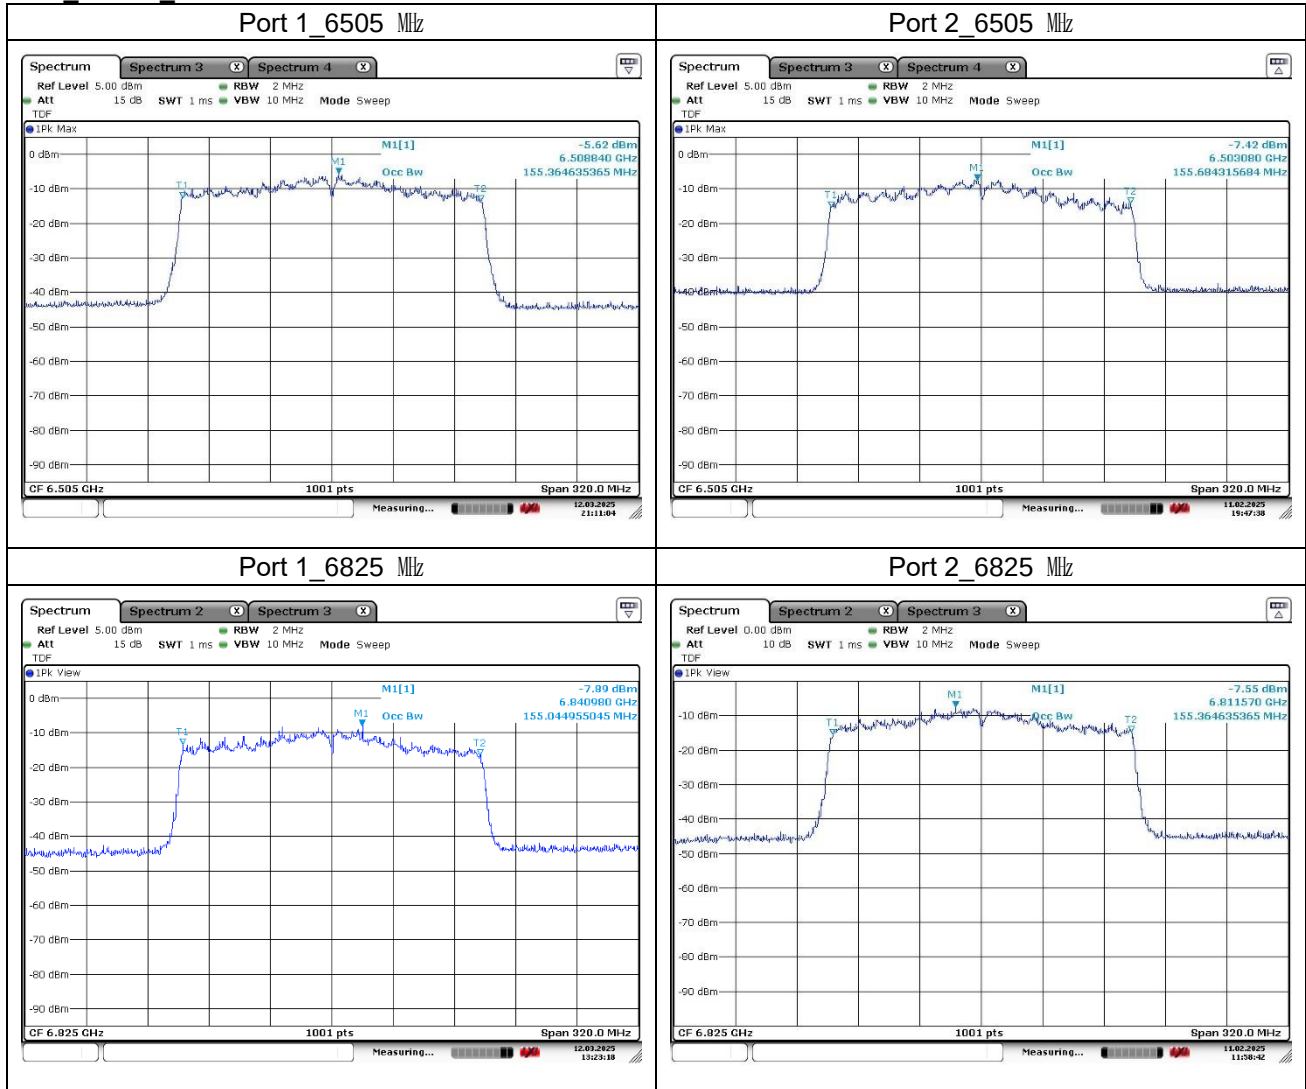

4. In band Emissions

4.1. Test Setup




4.2. Limit

According to §15.407(b)(7), for transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

4.3. Test Procedure

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW or 99% of the occupied bandwidth.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

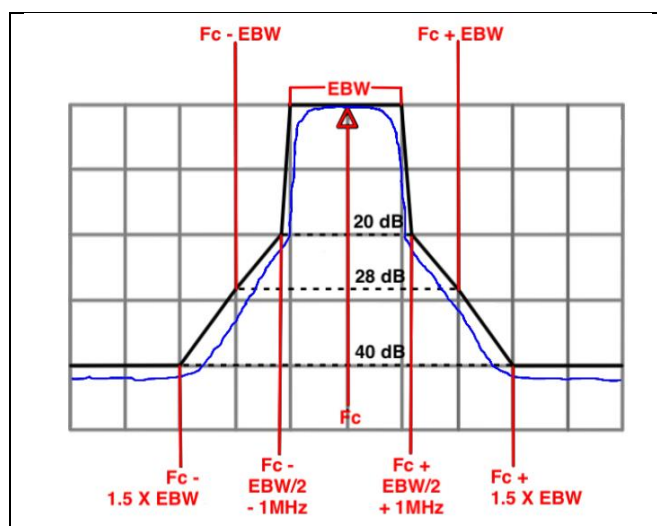


4.4. Test Result


Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

- Test plots


11a (Band 5)

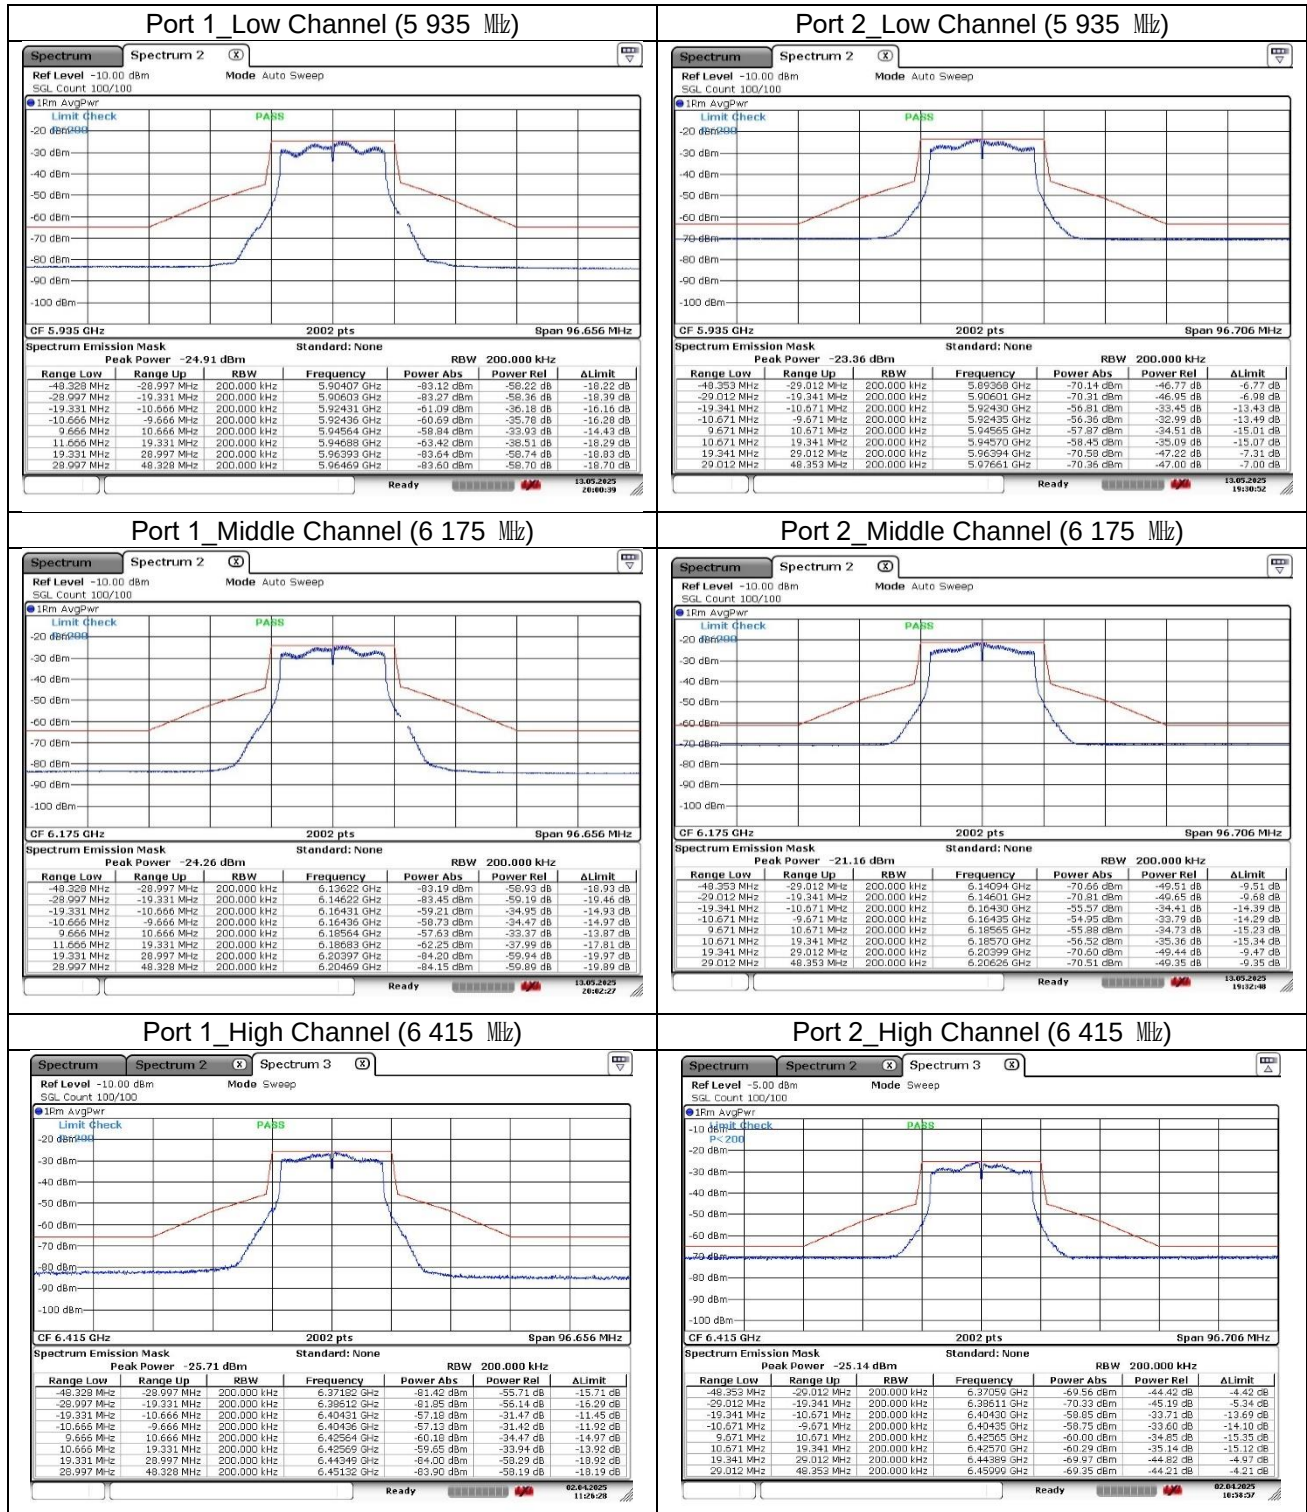

11a (Band 6)

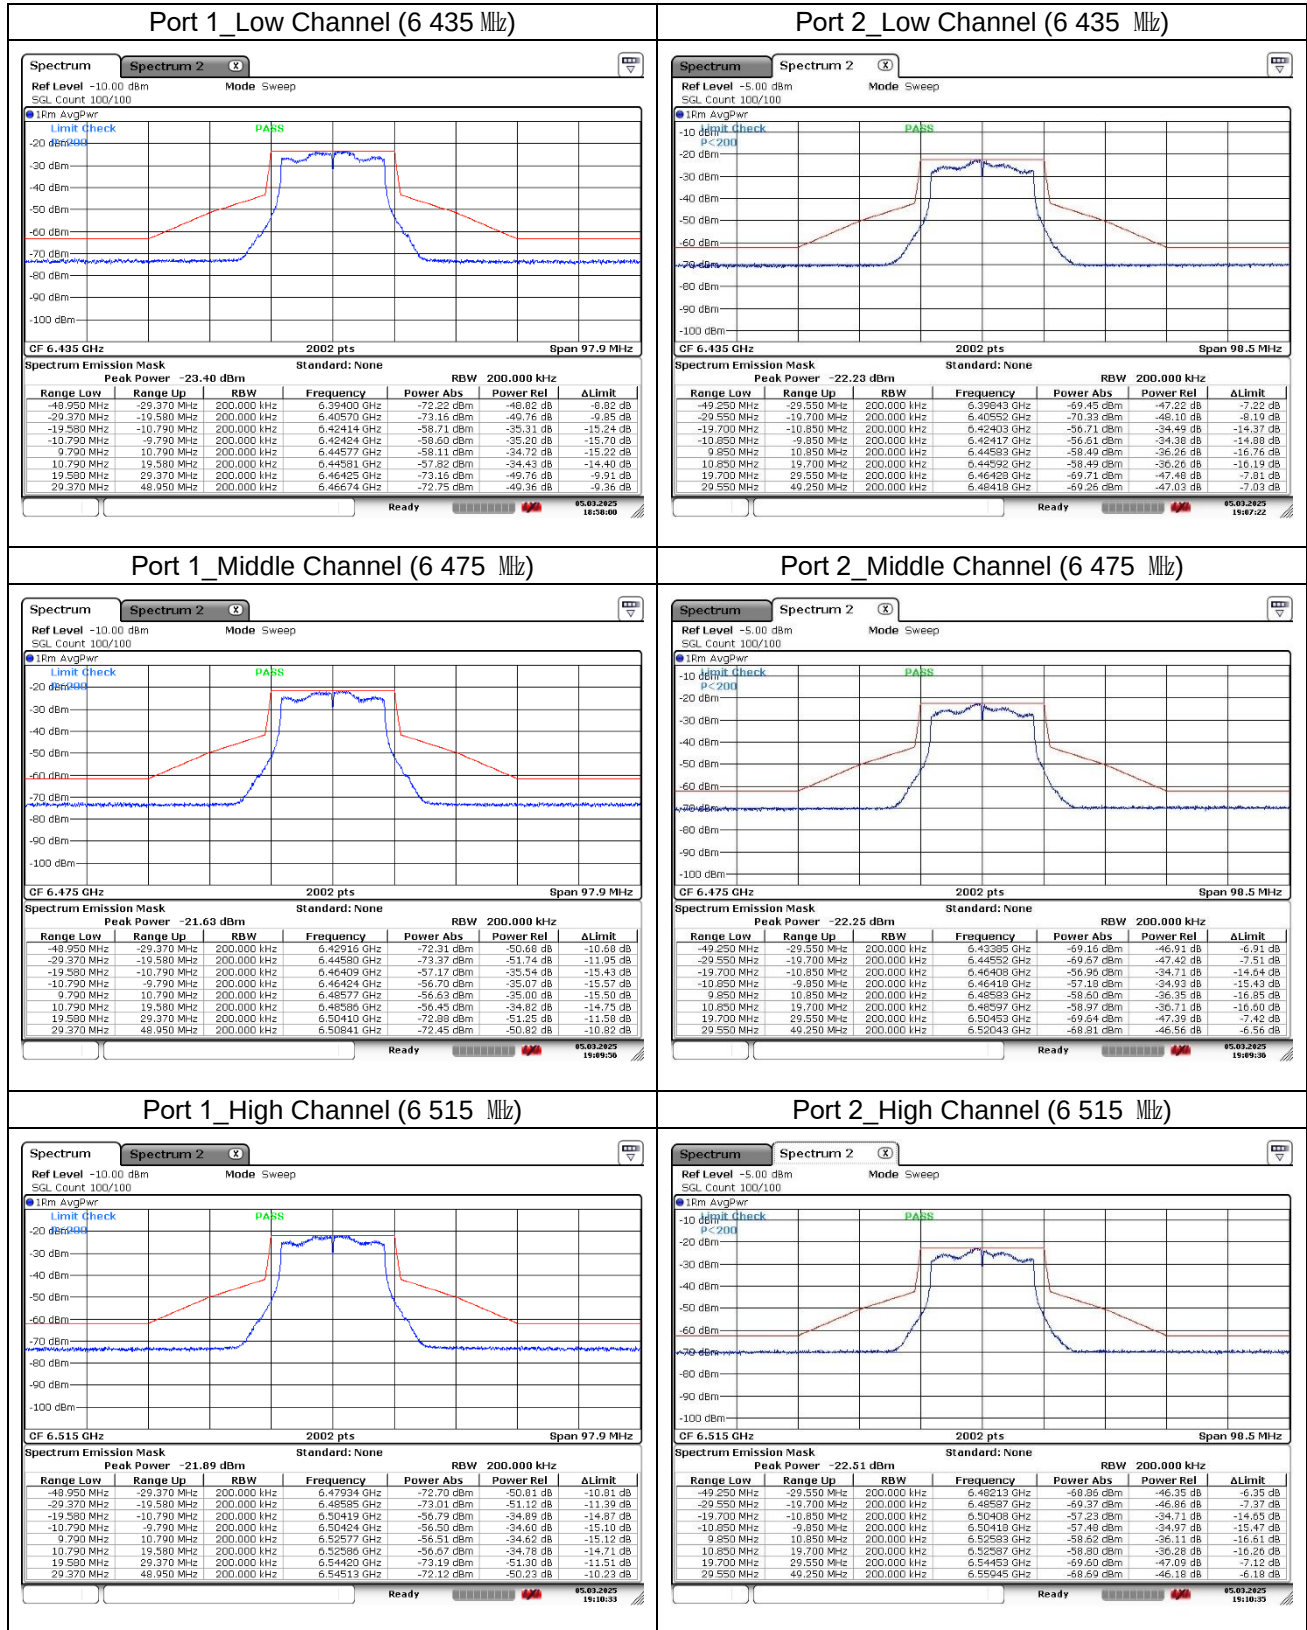

11a (Band 7)

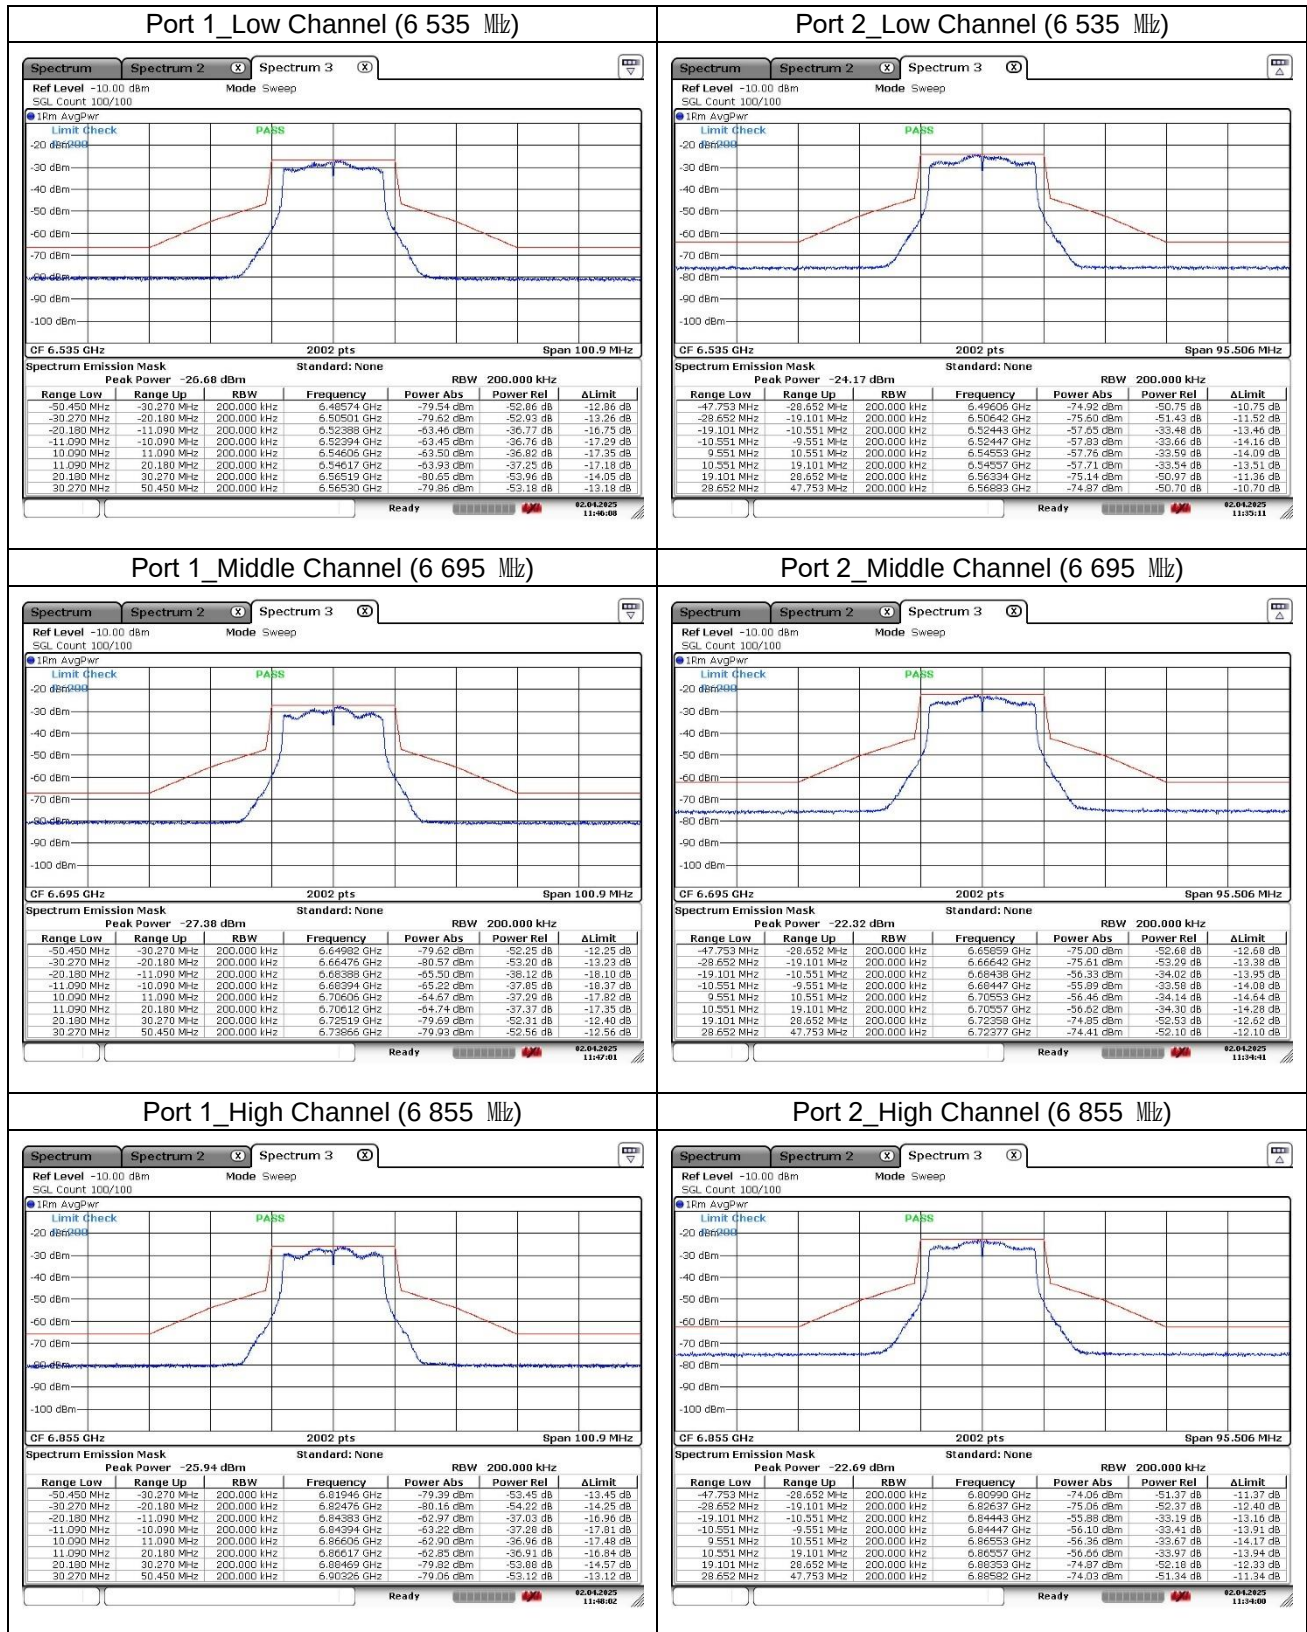

11a (Band 8)

