

FCC SAR TEST REPORT

Test File No : F690501-RF-SAR000590

Equipment Under Test	Telematics
Model Name	TFGMEIBBCD1
Variant Model	TFGMEIBBCD2, TFGMEIBBCD3, TFGMEIBBCD1_MY27, TFGMEIBBCD2_MY27, TFGMEIBBCD3_MY27
Applicant	LG Electronics USA, Inc.
Address of Applicant	111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, United States, 07632
FCC ID	BEJTFGMEIBBCD1
Exposure Category	General Population/Uncontrolled Exposure
Standards	FCC 47 CFR Part 2 (2.1093) IEEE 1528, 2013
Receipt No.	GPRI2504000811SR
Date of Receipt	2025-04-29
Date of Test(s)	2025-06-12 ~ 2025-07-15
Date of Issue	2025-09-03
Test Result	Refer to the Page 06

In the configuration tested, the EUT complied with the standards specified above.

This test report does not assure KOLAS accreditation.

Remarks:

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.



Report prepared by /
Jane Lee
Test Engineer



Approved by /
Minhyuk Han
Technical Manager

Report File No : F690501-RF-SAR000590

Date of Issue : 2025-09-03

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)



Revision history

Revision	Date of issue	Revisions	Revised By
-	Sep 03, 2025	Initial issue - The original test report is F690501-RF-SAR000386-A3, and the same test results apply. At the manufacturer's request, 5G NR n7 and n25 were retest due to the addition of bandwidth information for 5G NR bands n7, n25, and n41. Furthermore, LTE bands 25 and 71 have been newly added as supported bands and were tested accordingly.	

Table of Contents

Testing Laboratory	4
1 Details of Applicant	4
2 Details of Manufacturer	4
3 Description of EUT(s)	4
4 The Highest Reported SAR Values	6
6 Test Methodology	7
7 Testing Environment	7
8 Specific Absorption Rate (SAR)	8
8.1 Introduction	8
8.2 SAR Definition	8
8.3 Test Standards and Limits	8
9 The SAR Measurement System	10
10 System Components	11
10.1 Probe	11
10.2 ELI Phantom	11
10.3 Device Holder	12
11 SAR Measurement Procedures	13
11.1 Normal SAR Measurement Procedure	13
12 Definition of Reference	15
12.1 Other consumer electronic devices	15
13 SAR System Verification	16
14 Tissue Simulant Fluid for the Frequency Band	18
15 Instruments List	20
16 FCC Power Measurement Procedures	21
17 Measured and Reported SAR	21
18 5G NR FR1*	22
18.1 5G NR FR1 Test Application	22
19 Maximum Output Power Specifications*	23
20 RF Conducted Power Measurement	24
20.1 LTE	24
20.1.1 SAR measurement Conditions for LTE	24
20.1.2 Spectrum Plots for RB Configurations	24
20.1.3 MPR	24
20.1.4 Required RB Size and RB Offsets for SAR Testing	24
21 RF Conducted Power	25
22 DUT Antenna Locations*	25
23 SAR Test Exclusion Applied	26
24 SAR Data Summary	27
24.1 SAR data	27
25 Simultaneous SAR Results	32
25.1 5G NR EN-DC	32
26 SAR Measurement Variability	33
26.1 Measurement Variability	33
Uncertainty Analysis	34
Appendixes List	35
-THE END-	35

Testing Laboratory

Company Name	SGS Korea Co., Ltd. (Gunpo Laboratory)
Address	4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea
Laboratory Conformity Assessment Body Identifier (CABID)	KR0150
Telephone	+82 +31 428 5700
FAX	+82 +31 427 2371

1 Details of Applicant

Applicant	LG Electronics USA, Inc.
Address	111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, United States, 07632
Email	heejae.cho@lge.com
Phone No.	+1 201 470 2696

2 Details of Manufacturer

Applicant	LG Electronics Viet Nam Hai Phong Co., Ltd.
Address	Lot CN2, Trang Due Industrial Park, Le Loi Ward, An Duong District, Hai Phong City, Vietnam

3 Description of EUT(s)

EUT Type	Telematics	
Model Name	TFGMEIBBCD1	
Variant Model	TFGMEIBBCD2, TFGMEIBBCD3, TFGMEIBBCD1_MY27, TFGMEIBBCD2 MY27, TFGMEIBBCD3 MY27	
TFGMEIBBCD1 & Variant Model Difference	Same to RF module with Basic model except following function.	
	TFGMEIBBCD1	- Dual GNSS is supported. - Ultra-super cruise service is supported.
	TFGMEIBBCD2	- Same to RF module with basic model except following function. - Single GNSS is supported. - Ultra-super cruise service is not supported.
	TFGMEIBBCD3	- Same to RF module with basic model except following function. - Single GNSS is supported. - Ultra-super cruise service is not supported. - eUICC part is different with TFGMEIBBCD2.
	TFGMEIBBCD1_MY27	- Same as Basic model. - Only the model name differs for marketing purposes.
	TFGMEIBBCD2_MY27	- Same to RF module with basic model except following function. - Single GNSS is supported. - Ultra-super cruise service is not supported.
	TFGMEIBBCD3_MY27	- Same to RF module with basic model except following function. - Single GNSS is supported. - Ultra-super cruise service is not supported. - eUICC part is different with TFGMEIBBCD2.
External Antenna Information (Type / Manufacturer)	87832572 / Molex	
Software Version	SW180	
Hardware Version	Rev.G	
Serial Number	EBR25076202 #037	

Mode of Operation	WCDMA II / WCDMA IV / WCDMA V / LTE Band 2 / LTE Band 4 / LTE Band 5 / LTE Band 7 / LTE Band 12 / LTE Band 13 / LTE Band 14 / LTE Band 25 / LTE Band 26 / LTE Band 66 / LTE Band 71 / 5G NR n2 / 5G NR n5 / 5G NR n7 / 5G NR n12 / 5G NR n13 / 5G NR n14 / 5G NR n25 / 5G NR n26 / 5G NR n66 / 5G NR n71 / 5G NR n41 / 5G NR n77 / 5G NR n78
Tx Frequency Range	WCDMA II : 1850.0 ~ 1910 MHz WCDMA IV : 1710.0 ~ 1755.0 MHz WCDMA V : 824.0 ~ 849.0 MHz LTE Band 2 : 1850.0 ~ 1910.0 MHz LTE Band 4 : 1710.0 ~ 1755.0 MHz LTE Band 5 : 824.0 ~ 849.0 MHz LTE Band 7 : 2500.0 ~ 2570.0 MHz LTE Band 12 : 699.0 ~ 716.0 MHz LTE Band 13 : 777.0 ~ 787.0 MHz LTE Band 14 : 788.0 ~ 798.0 MHz LTE Band 25 : 1850 ~ 1915 MHz LTE Band 26 : 814.0 ~ 849.0 MHz LTE Band 66 : 1710.0 ~ 1780.0 MHz LTE Band 71 : 663.0 ~ 698.0 MHz 5G NR n2 : 1850 ~ 1910 MHz 5G NR n5 : 824.0 ~ 849.0 MHz 5G NR n7 : 2500.0 ~ 2570.0 MHz 5G NR n12 : 699 ~ 716 MHz 5G NR n13 : 777.0 ~ 787.0 MHz 5G NR n14 : 788.0 ~ 798.0 MHz 5G NR n25 : 1850 ~ 1915 MHz 5G NR n26 : 814 ~ 849 MHz 5G NR n66 : 1710 ~ 1780 MHz 5G NR n71 : 663 ~ 698 MHz 5G NR n41 : 2496 ~ 2690 MHz 5G NR n77 DoD : 3450 ~ 3550 MHz 5G NR n77 : 3700 ~ 3980 MHz 5G NR n78 DoD : 3450 ~ 3550 MHz 5G NR n78 : 3700 ~ 3800 MHz



4 The Highest Reported SAR Values

Equipment Class	Band	Highest Reported SAR 1g (W/kg)
PCE	LTE Band 25 Internal	0.309
PCE	LTE Band 25 External	0.023
PCE	LTE Band 71 Internal	0.157
PCE	LTE Band 71 External	0.008
PCE	5G NR n7 Internal	0.587
PCE	5G NR n7 External	0.040
PCE	5G NR n25 Internal	0.355
PCE	5G NR n25 External	0.005
Simultaneous SAR per KDB 690783 D01v01r03 :		0.787

6 Test Methodology

ANSI/IEEE C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

☒	KDB 865664 D01v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
☒	KDB 865664 D02v01r02	RF Exposure Compliance Reporting and Documentation Considerations
☐	KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
☒	KDB 447498 D04v01	Interim General RF Exposure Guidance
☐	KDB 447498 D02v02r01	SAR Measurement Procedures for USB Dongle Transmitters
☐	KDB 248227 D01v02r02	SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters
☐	KDB 615223 D01v01r01	802.16e/WiMax SAR Measurement Guidance
☐	KDB 616217 D04v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
☐	KDB 643646 D01v01r03	SAR Test Considerations for Occupational PTT Radios
☐	KDB 648474 D03v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
☐	KDB 648474 D04v01r03	SAR Evaluation Considerations for Wireless Handsets
☐	KDB 680106 D01v03r01	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
☐	KDB 941225 D01v03r01	3G SAR Measurement Procedures
☒	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
☐	KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
☐	KDB 941225 D07v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices

7 Testing Environment

Ambient temperature	: 18°C ~ 25°C
Relative humidity	: 30% ~ 70%
Liquid temperature of during the test	: $\pm 2^{\circ}\text{C}$
Ambient noise & Reflection	: $< 0.012 \text{ W/kg}$

8 Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

8.3 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.3-2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified

in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

1. The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

9 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. 1. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

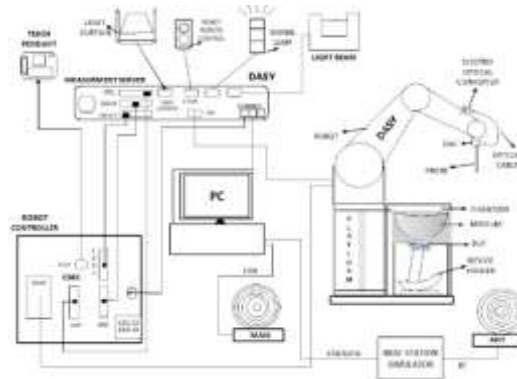


Fig a. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Verification dipole kits allowing to validate the proper functioning of the system.

10 System Components

10.1 Probe

Construction	: Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	: Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 835 and HSL1900. Additional CF-Calibration for other liquids and frequencies upon request.
Frequency	: 10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	: $10\mu\text{W/g}$ to > 100 mW/g; Linearity: ± 0.2 dB(noise: typically $< 1\mu\text{W/g}$)
Dimensions	: Overall length: 337 mm (Tip length: 20 mm) Tip diameter: 2.5 mm (Body diameter: 12 mm) Distance from probe tip to dipole centers: 1 mm
Application	: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%



EX3DV4 E-Field Probe

NOTE:

1. The Probe parameters have been calibrated by the SPEAG. Please reference “APPENDIX D” for the Calibration Certification Report.

10.2 ELI Phantom

Construction	: Phantom for compliance testing of handheld and bodymounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
---------------------	--

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure



ELI Phantom

Shell Thickness	: 2.0 mm $\pm$ 0.1 mm
Dimensions	: Major axis : 600 mm Minor axis : 400 mm

10.3 Device Holder

Construction: : In combination with the Twin SAM PhantomV4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

11 SAR Measurement Procedures

11.1 Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2 and 3: Area Scan & Zoom Scan Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. SAR drift shall be kept within $\pm 5\%$ and if it without $\pm 5\%$, SAR retest according to measurement procedure step 1~4.

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

12 Definition of Reference

12.1 Other consumer electronic devices

The exposure conditions of transmitters and modules incorporated in certain consumer electronic devices, such as printers, cameras, and camcorders may vary according to the installation and operating configurations required by the host products. Details of the transmitter and antenna configurations, antenna to user test separation distance, device operating configurations, etc., are required to determine SAR test exclusion or SAR measurement requirements for each host product. When SAR tests are required, a TCB inquiry is recommended to confirm the test setup. Unless the transmitter is used in a specific/dedicated host device, the standalone and simultaneous transmission SAR procedures for transmitters and modules should be applied. These must be fully explained in the permissive change documentation or equipment approval filing, whichever is applicable.

“Intended use distance” specified by the manufacturer: When there is no regulatory requirement, the intended use condition or distance specified by the manufacturer shall be used. This information shall be acquired from the user documentation accompanying the DUT. This device is mounted on the vehicle, and the physical distance from the device is 30mm. By manufacturer declaration, the test distance is 30mm. Testing of all six faces of the DUT might not be required; justification shall be provided when omitting testing of some faces.

The external antenna is mounted on the outer roof of the vehicle. In the given installation configuration, five of the six faces do not face the human body. As such, only the front face was evaluated.

13 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig 1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 750 / 1900 / 2600 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ \text{C}$, the relative humidity was in the range $(55 \pm 5) \% \text{ R.H}$ and the liquid depth above the ear reference points was $\geq 15 \text{ cm} \pm 5 \text{ mm}$ (frequency $\leq 3 \text{ GHz}$) or $\geq 10 \text{ cm} \pm 5 \text{ mm}$ (frequency $> 3 \text{ GHz}$) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

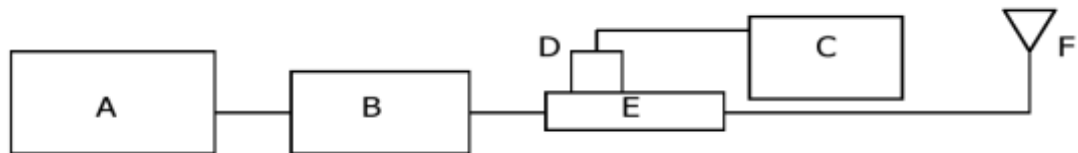


Fig 1. The microwave circuit arrangement used for SAR system verification

- A. Signal Generator
- B. RF Amplifier
- C. Power Meter
- D. Power Sensor
- E. Dual Directional Coupler
- F. Reference dipole Antenna



Photo of the dipole Antenna

SAR System Verification

Dipole Validation Kits		Probe S/N	Freq. (MHz)	Input Power (W)	Target SAR values (W/Kg)	1 W normalized Measured SAR (W/Kg)	SAR Deviation (%)	Date	Temperature (°C)	
Model	S/N				1g	1g	1g		Ambient	Liquid
D750V3	1085	7412	750	0.10	8.76	8.34	-4.79	2025-07-09	22.2	22.0
D750V3	1085	7412	750	0.10	8.76	8.62	-1.60	2025-07-10	22.1	21.8
D750V3	1085	7412	750	0.10	8.76	9.01	2.85	2025-07-11	22.0	21.9
D1900V2	5d158	7412	1900	0.10	39.70	41.40	4.28	2025-06-17	22.3	21.9
D1900V2	5d158	7412	1900	0.10	39.70	40.30	1.51	2025-06-18	22.1	21.7
D1900V2	5d158	7412	1900	0.10	39.70	40.30	1.51	2025-07-14	22.2	22.1
D1900V2	5d158	7412	1900	0.10	39.70	40.80	2.77	2025-07-15	22.3	22.0
D2600V2	1124	7412	2600	0.10	54.50	58.80	7.89	2025-06-12	22.4	22.0
D2600V2	1124	7412	2600	0.10	54.50	53.20	-2.39	2025-06-16	22.1	21.7

Table 1 Results system verification

14 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Speag Model DAK-3.5 Dielectric Probe in conjunction with Keysight E5063A Network Analyzer by using a procedure.

Freq. (MHz)	Target Value		Measure Value		Deviation (%)		Date	Liquid Temperature (°C)
	Permittivity	Conductivity (S/m)	Permittivity	Conductivity (S/m)	Permittivity	Conductivity (S/m)		
750*	41.90	0.89	41.000	0.904	-2.15	1.57	2025-07-09	22.0
680.50	41.90	0.89	41.268	0.881	-1.51	-1.01		
750*	41.90	0.89	41.811	0.904	-0.21	1.57	2025-07-10	21.8
680.50	41.90	0.89	42.107	0.881	0.49	-1.01		
750*	41.90	0.89	42.604	0.899	1.68	1.01	2025-07-11	21.9
680.50	41.90	0.89	42.832	0.872	2.22	-2.02		
1900*	40.00	1.40	40.440	1.398	1.10	-0.14	2025-06-17	21.9
1882.50	40.00	1.40	40.523	1.380	1.31	-1.43		
1900*	40.00	1.40	41.190	1.426	2.97	1.86	2025-06-18	21.7
1882.50	40.00	1.40	41.307	1.410	3.27	0.71		
1900*	40.00	1.40	38.989	1.448	-2.53	3.43	2025-07-14	22.1
1882.50	40.00	1.40	39.105	1.432	-2.24	2.29		
1900*	40.00	1.40	39.769	1.437	-0.58	2.64	2025-07-15	22.0
1882.50	40.00	1.40	39.831	1.417	-0.42	1.21		
2600*	39.00	1.96	39.243	2.011	0.62	2.60	2025-06-12	22.0
2535.00	39.00	1.96	39.488	1.937	1.25	-1.17		
2600*	39.00	1.96	37.308	2.041	-4.34	4.13	2025-06-16	21.7
2535.00	39.00	1.96	37.517	1.968	-3.80	0.41		

Note: The data marked (*) in this table was Permittivity/Conductivity results of Verification

The brain mixtures consist of a viscous gel using hydroxethylcellulose(HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation. The dielectric properties of the liquid material required to fill the phantom shell shall be target. For 3.4 to 10.0 GHz, the tests were done with using stimulating liquid made by SPEAG.

Frequency (MHz)	450	835	900	1800-2000	2450	2600
Tissue Type	Body					
Ingredient (% by weight)						
Water	38.91	40.29	40.29	55.24	45.0	45.0
Salt (NaCl)	3.79	1.38	1.38	0.31	0	0
Sugar	56.93	57.90	57.90	0	0	0
HEC	0.25	0.24	0.24	0	0	0
Bactericide	0.12	0.18	0.18	0	0	0
Triton X-100	0	0	0	0	0	0
DGBE	0	0	0	44.45	55.0	55.0
Tissue parameter target by IEEE 1528-2013						
Dielectric Constant	43.5	41.5	41.5	40.0	39.2	39.0
Conductivity (S/m)	0.87	0.90	0.97	1.40	1.80	1.96
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 M ⁺ resistivity				Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose		
DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]						

15 Instruments List

Test Platform	SPEAG DASY System				
Manufacture	SPEAG				
Description	SAR Test System				
Software Reference	DASY52: 52.10.4(1527) SEMCAD X: 14.6.14(7483)				
Equipment	Type	Serial Number	Cal Date	Cal Interval	Cal Due
Phantom	ELI Phantom	2246	N/A	N/A	N/A
Verification Dipole	D750V3	1085	2025-03-12	Biennial	2027-03-12
Verification Dipole	D1900V2	5d158	2025-04-16	Biennial	2027-04-16
Verification Dipole	D2600V2	1124	2024-07-22	Biennial	2026-07-22
Dielectric Assessment Kit	DAK-3.5	1228	2024-11-18	Annual	2025-11-18
DAE	DAE4	1595	2025-01-21	Annual	2026-01-21
E-Field Probe	EX3DV4	7412	2025-03-19	Annual	2026-03-19
Network Analyzer	E5063A	MY54706220	2025-01-08	Annual	2026-01-08
Power Meter	E4419B	GB43311715	2025-02-19	Annual	2026-02-19
Power Meter	N1914A	MY56120017	2025-06-04	Annual	2026-06-04
Power Sensor	E9300H	MY41495307	2025-04-17	Annual	2026-04-17
Power Sensor	E9300H	MY41495314	2025-04-17	Annual	2026-04-17
Power Sensor	N8481A	MY63190007	2024-07-05	Annual	2025-07-05
Power Sensor	N8481A	MY63190007	2025-07-07	Annual	2026-07-07
Signal Generator	SMBV100A	262093	2025-05-12	Annual	2026-05-12
Power Amplifier	2002-BBS2C4AEL	1029 D/C 0341	2024-11-28	Annual	2025-11-28
Power Amplifier	BLMA1060-10	1711221	2025-03-25	Annual	2026-03-25
Dual Directional Coupler	772D	MY52180259	2025-05-24	Annual	2026-05-24
Dual Directional Coupler	778D	MY52180497	2025-03-04	Annual	2026-03-04
LP Filter	WLJ5-1500-2355-6000-60EF	1	2025-05-23	Annual	2026-05-23
LP Filter	WLJ4-3000-5850-8000-60EF	1	2025-05-23	Annual	2026-05-23
Attenuator	05AS102-K20	A4	2024-12-06	Annual	2025-12-06
Attenuator	18N-03	18	2024-12-06	Annual	2025-12-06
Attenuator	18N-20	25	2024-11-27	Annual	2025-11-27
Hygro-Thermometer	303	210700311	2025-01-22	Annual	2026-01-22
Digital Thermometer	SDT25	19041500179	2024-08-29	Annual	2025-08-29
Communication Tester	MT8821C	6201502996	2025-06-02	Annual	2026-06-02
Radio Communication Test Station	MT8000A	6262036831	2025-02-13	Annual	2026-02-13



16 FCC Power Measurement Procedures

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

17 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

18 5G NR FR1*

18.1 5G NR FR1 Test Application

5G NR FR1 Band n7, n25 and n41 are declared by the manufacturer used to configuration for frequency, SCS, Bandwidth, Target power, and etc. The RB Configuration was evaluated all using reference to SCS / Bandwidth / Modulation supported by Section 6.1-1 of TS38.521-1.

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to MPR is 3GPP TS38.101-1 Section 6.2.2.

NR test was evaluated under Maximum power in NR single mode. In NR standalone mode, NR power states in the highest power, and the SAR measurement is determined by measuring LTE and 5G NR respectively.

5G NR Band	Mode	SCS (kHz)	Bandwidth (MHz)	Waveform	UL Modulation	RB Configuration	EN-DC (LTE Band)
n7	NSA/SA	15	5, 10, 15, 20, 25, 30, 40	DFT-s-OFDM	PI/2 BPSK QPSK 16QAM 64QAM 256QAM	Inner 1RB left Inner 1RB Right Inner Full Outer Full Edge 1RB Left Edge Full Left Edge 1RB Right Edge Full Right	5, 12
n25	NSA/SA	15	5, 10, 15, 20, 25, 30, 40				12
n41	NSA/SA	30	20, 30, 40, 50, 60, 70, 80, 90, 100	CP OFDM	QPSK 16QAM 64QAM 256QAM		5, 26
n41 MIMO	SA	30	20, 30, 40, 50, 60, 70, 80, 90, 100	CP OFDM			-

- The data marked * in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(*) provided by the customer.

19 Maximum Output Power Specifications^{*}

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01

LTE Maximum Power

Mode	Maximum / Normal	Maximum Output Power (dBm)
LTE Band 25	Maximum	25.00
	Normal	24.00
LTE Band 71	Maximum	25.00
	Normal	24.00

5G NR Maximum Power

Mode	Maximum / Normal	Maximum Output Power (dBm)
5G NR n7	Maximum	25.00
	Normal	24.00
5G NR n25	Maximum	25.00
	Normal	24.00
5G NR n41	Maximum	26.00
	Normal	25.00
5G NR n41 MIMO	Maximum	26.00
	Normal	25.00

- The data marked ^{*} in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(^{*}) provided by the customer.

20 RF Conducted Power Measurement

20.1 LTE

20.1.1 SAR measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR. Anritsu MT8821C was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

20.1.2 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

20.1.3 MPR

MPR is permanently implemented for this device by the manufacture. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3.-1

20.1.4 Required RB Size and RB Offsets for SAR Testing


According to FCC KDB 941225 D05V02r05

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Section 5.2.1, through 5.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

21 RF Conducted Power

- Refer to Appendix E.

22 DUT Antenna Locations*

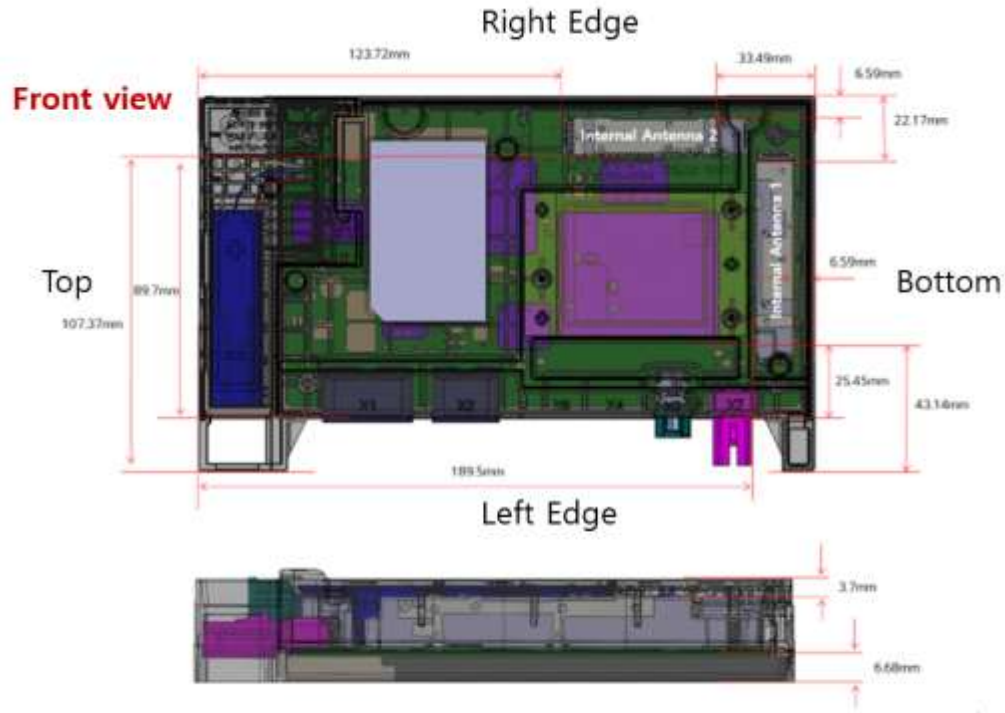

<The Distance information of Antenna to Edges of Car Telematics Modem>

- The data marked * in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(*) provided by the customer.

23 SAR Test Exclusion Applied

Based on the maximum tune-up tolerance limit of FDD, TDD, and the antenna to use separation distance, Table “Exempt” SAR was not required and Table “Measure” SAR was required.

Band	Frequency(MHz)	Output power		Separation distances(mm)					SAR Exemption				
		dbm	mw	Front	Right Edge	Left Edge	Top	Bottom	Front	Right Edge	Left Edge	Top	Bottom
LTE Internal Antenna 1													
LTE 25	1882.50	25.0	316.2	3.7	22.17	43.14	189.5	6.59	Measure	Measure	Measure	Exempt	Measure
LTE 71	680.50	25.0	316.2	3.7	22.17	43.14	189.5	6.59	Measure	Measure	Measure	Exempt	Measure
5G NR FDD Internal Antenna 1													
5G NR n7	2535.00	25.0	316.2	3.7	22.17	43.14	189.5	6.59	Measure	Measure	Measure	Exempt	Measure
5G NR n25	1882.50	25.0	316.2	3.7	22.17	43.14	189.5	6.59	Measure	Measure	Measure	Exempt	Measure

Note

1. Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
3. Output power is the maximum rated power (including tune-up or manufacturing tolerances).
4. If the antenna separation distance is > 50mm then the value listed is the output power threshold, above which SAR measurement is required. For separation ≤ 50mm the value is the KDB 447498 D04v01 calculated value and must be less than 7.5 for SAR exemption.
5. Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

24 SAR Data Summary

24.1 SAR data

LTE Band 25 Body SAR Internal							Ambient Temperature (°C)			22.2, 22.3			
							Liquid Temperature (°C)			22.1, 22.0			
							Date			2025-07-14, 2025-07-15			
Position	Mod.	BW (MHz)	Freq (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1g SAR (W/kg)
Front	QPSK	20	1882.50	26365	1	0	N/A	30	24.13	0.253	25.00	1.222	0.309
Front	QPSK	20	1882.50	26365	50	25	N/A	30	23.97	0.204	24.00	1.007	0.205
Right Edge	QPSK	20	1882.50	26365	1	0	N/A	30	24.13	0.069	25.00	1.222	0.084
Right Edge	QPSK	20	1882.50	26365	50	25	N/A	30	23.97	0.055	24.00	1.007	0.055
Left Edge	QPSK	20	1882.50	26365	1	0	N/A	30	24.13	0.028	25.00	1.222	0.034
Left Edge	QPSK	20	1882.50	26365	50	25	N/A	30	23.97	0.020	24.00	1.007	0.020
Bottom	QPSK	20	1882.50	26365	1	0	N/A	30	24.13	0.252	25.00	1.222	0.308
Bottom	QPSK	20	1882.50	26365	50	25	N/A	30	23.97	0.193	24.00	1.007	0.194

LTE Band 25 Body SAR External							Ambient Temperature (°C)			22.2, 22.3			
							Liquid Temperature (°C)			22.1, 22.0			
							Date			2025-07-14, 2025-07-15			
Position	Mod.	BW (MHz)	Freq (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1g SAR (W/kg)
Front	QPSK	20	1882.50	26365	1	0	N/A	30	24.13	0.002	25.00	1.007	0.002
Front	QPSK	20	1882.50	26365	50	25	N/A	30	23.97	0.023	24.00	1.007	0.023

LTE Band 71 Body SAR Internal							Ambient Temperature (°C)			22.1, 22.0			
							Liquid Temperature (°C)			21.8, 21.9			
							Date			2025-07-10, 2025-07-11			
Position	Mod.	BW (MHz)	Freq (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1g SAR (W/kg)
Front	QPSK	20	680.50	133297	1	0	N/A	30	24.14	0.129	25.00	1.219	0.157
Front	QPSK	20	680.50	133297	50	25	N/A	30	23.43	0.109	24.00	1.140	0.124
Right Edge	QPSK	20	680.50	133297	1	0	N/A	30	24.14	0.021	25.00	1.219	0.026
Right Edge	QPSK	20	680.50	133297	50	25	N/A	30	23.43	0.023	24.00	1.140	0.026
Left Edge	QPSK	20	680.50	133297	1	0	N/A	30	24.14	0.035	25.00	1.219	0.043
Left Edge	QPSK	20	680.50	133297	50	25	N/A	30	23.43	0.029	24.00	1.140	0.033
Bottom	QPSK	20	680.50	133297	1	0	N/A	30	24.14	0.056	25.00	1.219	0.068
Bottom	QPSK	20	680.50	133297	50	25	N/A	30	23.43	0.065	24.00	1.140	0.074

LTE Band 71 Body SAR External							Ambient Temperature (°C)			22.2, 22.1			
							Liquid Temperature (°C)			22.0, 21.8			
							Date			2025-07-09, 2025-07-10			
Position	Mod.	BW (MHz)	Freq (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1g SAR (W/kg)
Front	QPSK	20	680.50	133297	1	0	N/A	30	24.14	0.005	25.00	1.219	0.006
Front	QPSK	20	680.50	133297	50	25	N/A	30	23.43	0.007	24.00	1.140	0.008

5G NR n7 Body SAR									Ambient Temperature(°C)			22.4, 22.1			
									Liquid Temperature (°C)			22.0, 21.7			
									Date			2025-06-12, 2025-06-16			
Position	Waveform	Mod.	SCS (kHz)	BW (MHz)	Freq. (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1 g SAR (W/kg)
Front	DFT-s-OFDM	BPSK	15	40	2535.00	507000	1	1	N/A	30	24.51	0.337	25.00	1.119	0.377
Front	DFT-s-OFDM	BPSK	15	40	2535.00	507000	108	54	N/A	30	24.22	0.447	25.00	1.197	0.535
Right Edge	DFT-s-OFDM	BPSK	15	40	2535.00	507000	1	1	N/A	30	24.51	0.190	25.00	1.119	0.213
Right Edge	DFT-s-OFDM	BPSK	15	40	2535.00	507000	108	54	N/A	30	24.22	0.189	25.00	1.197	0.226
Left Edge	DFT-s-OFDM	BPSK	15	40	2535.00	507000	1	1	N/A	30	24.51	0.046	25.00	1.119	0.051
Left Edge	DFT-s-OFDM	BPSK	15	40	2535.00	507000	108	54	N/A	30	24.22	0.053	25.00	1.197	0.063
Bottom	DFT-s-OFDM	BPSK	15	40	2535.00	507000	1	1	N/A	30	24.51	0.379	25.00	1.119	0.424
Bottom	DFT-s-OFDM	BPSK	15	40	2535.00	507000	108	54	N/A	30	24.22	0.490	25.00	1.197	0.587

5G NR n7 Body SAR_External									Ambient Temperature(°C)			22.1			
									Liquid Temperature (°C)			21.7			
									Date			2025-06-16			
Position	Waveform	Mod.	SCS (kHz)	BW (MHz)	Freq. (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1 g SAR (W/kg)
Front	DFT-s-OFDM	BPSK	15	40	2535.00	507000	1	1	N/A	30	24.51	0.029	25.00	1.119	0.032
Front	DFT-s-OFDM	BPSK	15	40	2535.00	507000	108	54	N/A	30	24.22	0.033	25.00	1.197	0.040

5G NR n25 Body SAR									Ambient Temperature(°C)		22.3				
									Liquid Temperature (°C)		21.9				
									Date		2025-06-17				
Position	Waveform	Mod.	SCS (kHz)	BW (MHz)	Freq. (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1 g SAR (W/kg)
Front	DFT-s-OFDM	BPSK	15	40	1882.50	376500	1	1	N/A	30	24.50	0.246	25.00	1.122	0.276
Front	DFT-s-OFDM	BPSK	15	40	1882.50	376500	108	54	N/A	30	24.42	0.301	25.00	1.143	0.344
Right Edge	DFT-s-OFDM	BPSK	15	40	1882.50	376500	1	1	N/A	30	24.50	0.083	25.00	1.122	0.093
Right Edge	DFT-s-OFDM	BPSK	15	40	1882.50	376500	108	54	N/A	30	24.42	0.073	25.00	1.143	0.083
Left Edge	DFT-s-OFDM	BPSK	15	40	1882.50	376500	1	1	N/A	30	24.50	0.036	25.00	1.122	0.040
Left Edge	DFT-s-OFDM	BPSK	15	40	1882.50	376500	108	54	N/A	30	24.42	0.033	25.00	1.143	0.038
Bottom	DFT-s-OFDM	BPSK	15	40	1882.50	376500	1	1	N/A	30	24.50	0.316	25.00	1.122	0.355
Bottom	DFT-s-OFDM	BPSK	15	40	1882.50	376500	108	54	N/A	30	24.42	0.247	25.00	1.143	0.282

5G NR n25 Body SAR_External									Ambient Temperature(°C)		22.1				
									Liquid Temperature (°C)		21.7				
									Date		2025-06-18				
Position	Waveform	Mod.	SCS (kHz)	BW (MHz)	Freq. (MHz)	Ch.	RB Size	RB Offset	Sensor State (Grip)	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Scaling 1 g SAR (W/kg)
Front	DFT-s-OFDM	BPSK	15	40	1882.50	376500	1	1	N/A	30	24.50	0.000408	25.00	1.122	0.000458
Front	DFT-s-OFDM	BPSK	15	40	1882.50	376500	108	54	N/A	30	24.42	0.004	25.00	1.143	0.005



General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D04v01.
2. Liquid tissue depth was at least 15 cm for all frequencies.
3. All modes of operation were investigated, and worst-case results are reported.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2 dB below the highest peak.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 5.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3-6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.

5G NR Notes:

1. According to FCC guidance, SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, Due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
2. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.
3. According to FCC guidance, NR modulations and RB sizes/offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.



25 Simultaneous SAR Results

25.1 5G NR EN-DC

Configuration		Internal				External
		Front	Right Edge	Left Edge	Bottom	Front
LTE5 Antenna1	NR n7 Antenna1	0.787	0.333	0.142	0.786	0.046
LTE12 Antenna1	NR n7 Antenna1	0.681	0.273	0.163	0.726	0.045
LTE12 Antenna1	NR n25 Antenna1	0.490	0.140	0.140	0.494	0.010

- Note

This report is based on the original test report F690501-RF-SAR000386-A3, and simultaneous SAR results not included in this report were calculated with reference to the data presented in the original report.

26 SAR Measurement Variability

26.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the power supply before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Uncertainty Analysis

a	c	d	e = f(d,k)	f	g	h =	i =	k
						cxg/e	cxg/e	
Uncertainty Component	Tol	Prob .	Div.	Ci	Ci	1g	10g	Vi
	(%)	Dist.		(1g)	(10g)	ui (%)	ui (%)	(Veff)
Probe calibration	6.55	N	1.00	1.00	1.00	6.55	6.55	∞
Axial Isotropy	4.70	R	1.73	0.71	0.71	1.92	1.92	∞
Hemispherical Isotropy	9.60	R	1.73	0.71	0.71	3.92	3.92	∞
Boundary Effects	2.00	R	1.73	1.00	1.00	1.15	1.15	∞
Linearity	4.70	R	1.73	1.00	1.00	2.71	2.71	∞
System Detection Limits	0.25	R	1.73	1.00	1.00	0.14	0.14	∞
Modulation Response	4.80	R	1.73	1.00	1.00	2.77	2.77	∞
Readout Electronics	0.30	N	1.00	1.00	1.00	0.30	0.30	∞
Response Time	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Integration Time	2.60	R	1.73	1.00	1.00	1.50	1.50	∞
RF Ambient Noise	3.00	R	1.73	1.00	1.00	1.73	1.73	∞
RF Ambient Reflections	3.00	R	1.73	1.00	1.00	1.73	1.73	∞
Probe Positioner mechanical tolerance	0.40	R	1.73	1.00	1.00	0.23	0.23	∞
Probe Positioning with respect to phantom shell	6.70	R	1.73	1.00	1.00	3.87	3.87	∞
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	4.00	R	1.73	1.00	1.00	2.31	2.31	∞
Test sample positioning	1.35/2.10	N	1.00	1.00	1.00	1.35	2.10	35
Device holder uncertainty	3.98/3.17	N	1.00	1.00	1.00	3.98	3.17	3
Output power variation - SAR drift measurement	5.00	R	1.73	1.00	1.00	2.89	2.89	∞
Phantom uncertainty	6.60	R	1.73	1.00	1.00	3.81	3.81	∞
Liquid conductivity-measurement	2.89	N	1.00	0.78	0.71	2.25	2.05	59
Liquid permittivity-measurement	2.47	N	1.00	0.23	0.26	0.57	0.64	59
Liquid conductivity-temperature	1.65	R	1.73	0.78	0.71	0.74	0.68	20
Liquid permittivity – temperature	1.47	R	1.73	0.23	0.26	0.20	0.22	20
Combined standard uncertainty			RSS			12.40	12.24	281/660
Expanded uncertainty (95% CONFIDENCE INTERVAL)			k=2			24.80	24.48	



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 35/35

Appendixes List

Appendix A	Appendix A Verification Plots
Appendix B	Appendix B Test Plots
Appendix C	Appendix C Photograph
Appendix D	Appendix D Probe, DAE and Dipole Calibration Certificates
Appendix E	Appendix E RF Conducted Power

-THE END-