

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2008-0265

2. Customer

• Name : LG Electronics USA

• Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States, 07632

3. Use of Report : FCC-Class II Permissive Change

4. Product Name / Model Name : Module / TM12ANNAGM0

FCC ID : BEJTM12ANNAGM0

5. FCC Regulation(s): Part 2, 22, 24, 27

Test Method Used : KDB971168 D01v03r01, ANSI/TIA-603-E-2016, ANSI C63.26-2015

6. Date of Test : 2020.07.15 ~ 2020.08.04

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

8. Testing Environment : Refer to appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by	Reviewed by
	Name : JungWoo Kim 	Name : JaeJin Lee  (Signature)

2020 . 08 . 28 .

DT&C Co., Ltd.

Not abided by KS Q ISO / IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2008-0265	Aug. 28, 2020	Initial issue	JungWoo Kim	JaeJin Lee

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	6
2.1 EUT DESCRIPTION	6
2.2 TESTING ENVIRONMENT	6
2.3 MEASURING INSTRUMENT CALIBRATION.....	6
2.4 MEASUREMENT UNCERTAINTY	6
2.5 TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)	7
3.2 UNDESIRABLE EMISSIONS	9
4. LIST OF TEST EQUIPMENT	10
5. SUMMARY OF TEST RESULTS	11
6. SAMPLE CALCULATION	12
7. TEST DATA.....	13
7.1 RF power output	13
7.2 ERP & EIRP	17
7.3 UNDESIRABLE EMISSIONS (Radiated).....	19

1. GENERAL INFORMATION

Applicant Name : LG Electronics USA
Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States, 07632
FCC ID : BEJTM12ANNAGM0
FCC Classification : PCS Licensed Transmitter (PCB)
EUT Type : Module
Model Name : TM12ANNAGM0
Add Model Name : NA
Supplying power : DC 12 V
Antenna Information : External antenna

Mode	TX Frequency (MHz)	Modulation	Emission Designator	Conducted Output power(dBm)	
				Max power (dBm)	Max power (W)
LTE Band 12	704 ~ 711	QPSK	8M96G7D	23.12	0.205
LTE Band 12	704 ~ 711	16QAM	8M94W7D	22.40	0.174
LTE Band 12	701.5 ~ 713.5	QPSK	4M48G7D	22.96	0.198
LTE Band 12	701.5 ~ 713.5	16QAM	4M49W7D	22.28	0.169
LTE Band 12	700.5 ~ 714.5	QPSK	2M70G7D	22.87	0.194
LTE Band 12	700.5 ~ 714.5	16QAM	2M70W7D	22.20	0.166
LTE Band 12	699.7 ~ 715.3	QPSK	1M09G7D	22.89	0.195
LTE Band 12	699.7 ~ 715.3	16QAM	1M09W7D	22.13	0.163

Mode	TX Frequency (MHz)	Modulation	Emission Designator	Conducted Output power(dBm)	
				Max power (dBm)	Max power (W)
LTE Band 5	829 ~ 844	QPSK	8M96G7D	23.24	0.211
LTE Band 5	829 ~ 844	16QAM	8M94W7D	22.68	0.185
LTE Band 5	826.5 ~ 846.5	QPSK	4M49G7D	23.18	0.208
LTE Band 5	826.5 ~ 846.5	16QAM	4M48W7D	22.56	0.180
LTE Band 5	825.5 ~ 847.5	QPSK	2M71G7D	23.23	0.210
LTE Band 5	825.5 ~ 847.5	16QAM	2M69W7D	22.52	0.179
LTE Band 5	824.7 ~ 848.3	QPSK	1M08G7D	23.24	0.211
LTE Band 5	824.7 ~ 848.3	16QAM	1M09W7D	22.58	0.181

Mode	TX Frequency (MHz)	Modulation	Emission Designator	Conducted Output power(dBm)	
				Max power (dBm)	Max power (W)
LTE Band 2	1 860 ~ 1 900	QPSK	17M9G7D	23.47	0.222
LTE Band 2	1 860 ~ 1 900	16QAM	17M9W7D	22.65	0.184
LTE Band 2	1 857.5 ~ 1 902.5	QPSK	13M5G7D	23.42	0.220
LTE Band 2	1 857.5 ~ 1 902.5	16QAM	13M4W7D	22.65	0.184
LTE Band 2	1 855 ~ 1 905	QPSK	8M96G7D	23.60	0.229
LTE Band 2	1 855 ~ 1 905	16QAM	8M94W7D	22.59	0.182
LTE Band 2	1 852.5 ~ 1 907.5	QPSK	4M49G7D	23.27	0.212
LTE Band 2	1 852.5 ~ 1 907.5	16QAM	4M49W7D	22.56	0.180
LTE Band 2	1 851.5 ~ 1 908.5	QPSK	2M70G7D	23.29	0.213
LTE Band 2	1 851.5 ~ 1 908.5	16QAM	2M70W7D	22.47	0.177
LTE Band 2	1 850.7 ~ 1 909.3	QPSK	1M08G7D	23.04	0.201
LTE Band 2	1 850.7 ~ 1 909.3	16QAM	1M09W7D	22.39	0.173

Mode	TX Frequency (MHz)	Modulation	Emission Designator	Conducted Output power(dBm)	
				Max power (dBm)	Max power (W)
LTE Band 4	1 720 ~ 1 745	QPSK	17M9G7D	23.36	0.217
LTE Band 4	1 720 ~ 1 745	16QAM	17M9W7D	22.68	0.185
LTE Band 4	1 717.5 ~ 1 745.5	QPSK	13M4G7D	23.39	0.218
LTE Band 4	1 717.5 ~ 1 745.5	16QAM	13M5W7D	22.69	0.186
LTE Band 4	1 715 ~ 1 750	QPSK	8M97G7D	23.39	0.218
LTE Band 4	1 715 ~ 1 750	16QAM	8M96W7D	22.65	0.184
LTE Band 4	1 712.5 ~ 1 752.5	QPSK	4M50G7D	23.48	0.223
LTE Band 4	1 712.5 ~ 1 752.5	16QAM	4M49W7D	22.37	0.173
LTE Band 4	1 711.5 ~ 1 753.5	QPSK	2M70G7D	23.35	0.216
LTE Band 4	1 711.5 ~ 1 753.5	16QAM	2M70W7D	22.34	0.171
LTE Band 4	1 710.7 ~ 1 754.3	QPSK	1M09G7D	23.13	0.206
LTE Band 4	1 710.7 ~ 1 754.3	16QAM	1M09W7D	22.30	0.170

2. INTRODUCTION

2.1 EUT DESCRIPTION

This EUT contains the following capabilities: 850/1900 WCDMA/HSUPA, LTE Single transmitting for band 2/4/5/12

2.2 TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 °C ~ +24 °C
▪ Relative Humidity	40 % ~ 48 %

2.3 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	4.9 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (Above 18 GHz)	5.3 dB (The confidence level is about 95 %, $k = 2$)


2.5 TEST FACILITY

DT&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site comply with the requirements of § 2.948 according to ANSI 63.4-2014.		
- FCC & IC MRA Designation Number : KR0034		
www.dtnet.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

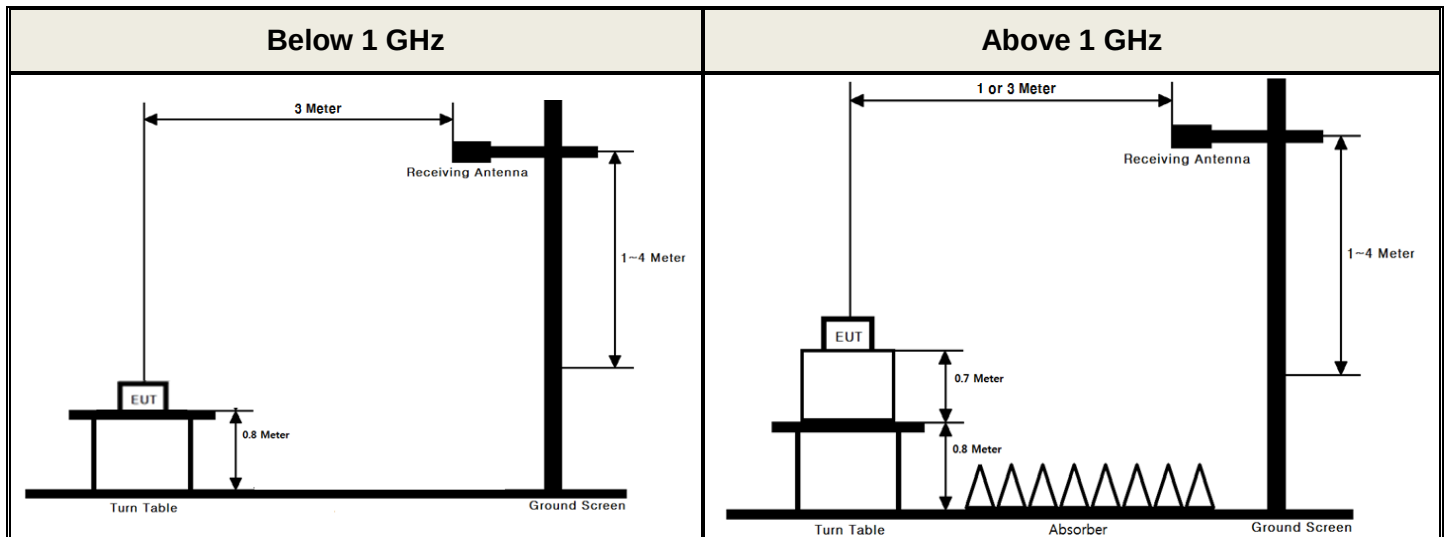

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- **ANSI/TIA-603-E-2016 - Section 2.2.17**
- **KDB971168 D01v03 - Section 5.2.2**
- **ANSI C63.26-2015 – Section 5.2.4.4.1**

Test setting

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be

averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2 UNDESIRABLE EMISSIONS

Test Set-up

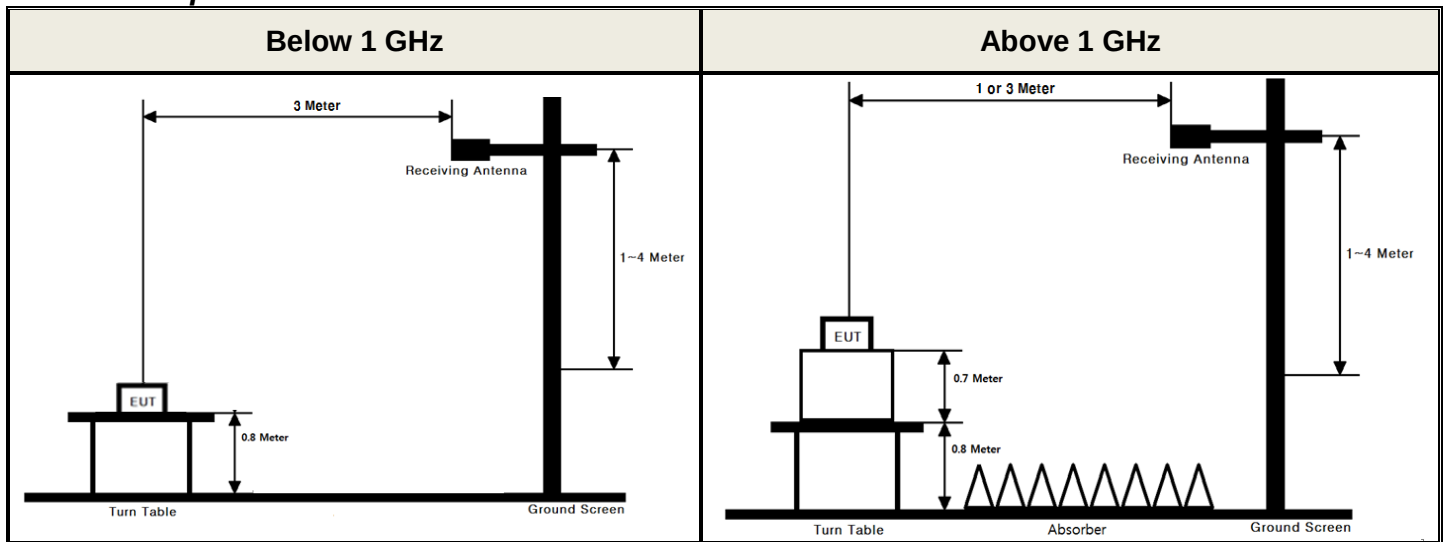

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.12
- KDB971168 D01v03 - Section 5.8
- ANSI C63.26-2015 – Section 5.5

Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW $\geq$ 3 X RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq$ 2 X span / RBW
5. The trace was allowed to stabilize

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	20/06/24	21/06/24	US47360812
DC power supply	SM techno	SDP30-5D	20/06/24	21/06/24	305DNF079
Multimeter	FLUKE	17B+	19/12/16	20/12/16	36390701WS
Radio Communication Analyzer	Anritus	MT8820C	19/12/16	20/12/16	6201274516
Thermohygrometer	BODYCOM	BJ5478	19/12/18	20/12/18	120612-2
Thermohygrometer	BODYCOM	BJ5478	19/12/18	20/12/18	120612-1
Signal Generator	Rohde Schwarz	SMBV100A	19/12/16	20/12/16	255571
Signal Generator	ANRITSU	MG3695C	19/12/16	20/12/16	173501
Loop Antenna	ETS-Lindgren	6502	19/09/18	21/09/18	00226186
Bilog Antenna	Schwarzbeck	VULB 9160	19/04/23	21/04/23	9160-3362
Dipole Antenna	A.H.Systems Inc.	FCC-4	19/03/26	21/03/26	710A
Dipole Antenna	Schwarzbeck	UHA9105	20/04/10	22/04/10	2262
HORN ANT	ETS	3117	20/04/24	21/04/24	00140394
HORN ANT	ETS	3117	20/03/26	21/03/26	00152145
HORN ANT	A.H.Systems	SAS-574	20/06/24	21/06/24	154
HORN ANT	A.H.Systems	SAS-574	20/06/24	21/06/24	155
Amplifier	EMPOWER	BBS3Q7ELU	20/06/24	21/06/24	1020
PreAmplifier	H.P	8447D	19/12/16	20/12/16	2944A07774
PreAmplifier	RFBAY.Inc	MPA-40-40	19/12/16	20/12/16	21151801
PreAmplifier	Agilent	8449B	20/06/24	21/06/24	3008A02108
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	20/06/24	21/06/24	7
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	20/06/24	21/06/24	3
Cable	DTNC	Cable	20/01/16	21/01/16	M-01
Cable	DTNC	Cable	20/01/16	21/01/16	M-02
Cable	Junkosha	MWX315	20/01/16	21/01/16	M-05
Cable	Junkosha	MWX221	20/01/16	21/01/16	M-06
Cable	DTNC	Cable	20/01/16	21/01/16	RF-09

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

5. SUMMARY OF TEST RESULTS

FCC Part	Test Description	Test Limit	Test Condition	Status Note 1
2.1046	RF power output	N/A	Conducted	C
2.1049	Occupied Bandwidth	N/A		NT
24.232(d) 27.50(d.5)	Peak to Average Ratio	< 13 dB		NT
2.1051 24.238(a) 27.53(g)	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P) dB at Band edge and for all out-of-band emissions		NT
2.1055 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Fundamental emissions must stay within Authorized frequency block (Part 24, 27)		NT
27.50(c.10) 22.913(a.5) 24.232(c) 27.50(d.4)	Radiated Output Power	< 3 Watts max. ERP (Band 12) < 7 Watts max. ERP (Band 5) < 2 Watts max. EIRP (Band 2) < 1 Watts max. EIRP (Band 4)	Radiated	C Note3
2.1053 24.238(a) 27.53(g)	Undesirable Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions		C Note4
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: The module was installed into host product during test. Note 3: This test item was performed based on band with the highest antenna gain. Note 4: This test item was performed at the worst case based on the original filing.				

6. SAMPLE CALCULATION

A. For substitution method

- 1) The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1 GHz respectively above ground.
- 2) The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3) During the test, the turn table is rotated until the maximum signal is found.
- 4) Record the field strength meter's level. (ex. Spectrum reading level is -8.5 dBm)
- 5) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 6) Increase the signal generator output till the field strength meter's level is equal to the item (4).
(ex. Signal generator level is -18.04 dBm)
- 7) The gain of the cable and amplifier between the signal generator and terminals of substituted antenna is 46.92 dB at test frequency.
- 8) Record the level at substituted antenna terminal. (ex. 28.88dBm)
- 9) The result is calculated as below;

$$\text{EIRP(dBm)} = \text{LEVLE@ANTENNA TERMINAL} + \text{TX Antenna Gain (dBi)}$$


$$\text{ERP(dBm)} = \text{LEVLE@ANTENNA TERMINAL} + \text{TX Antenna Gain (dBd)}$$

$$\text{Where, TX Antenna Gain (dBd)} = \text{TX Antenna Gain (dBi)} - 2.15 \text{ dB}$$

7. TEST DATA

7.1 RF power output

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

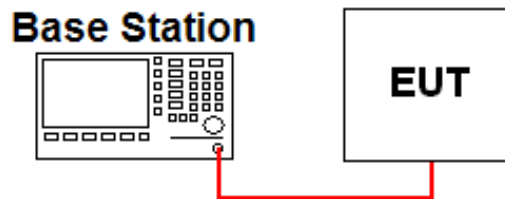

Note 1: The conducted output power was measured using the Anritsu MT8820C

▪ Band 12

Conducted Power [dBm]									
RB Alloc			1 RB			MID RB			FULL RB
B.W(MHz)	Freq.(MHz)	Modulation	LOW	MID	HIGH	LOW	MID	HIGH	
10	704	QPSK	23.02	22.71	23.02	21.89	21.85	21.95	21.94
		16QAM	22.39	21.98	22.30	20.88	20.84	20.90	20.96
	711	QPSK	23.06	22.89	23.12	21.98	21.99	22.09	22.06
		16QAM	22.30	22.10	22.40	20.89	21.06	21.13	21.03
5	701.5	QPSK	22.72	22.82	22.80	21.83	21.85	21.78	21.80
		16QAM	22.28	22.14	22.09	20.85	20.93	20.82	20.83
	707.5	QPSK	22.71	22.88	22.77	21.78	21.86	21.82	21.75
		16QAM	22.10	22.21	22.11	20.88	20.94	20.87	20.74
	713.5	QPSK	22.86	22.96	22.83	21.87	22.01	21.80	21.90
		16QAM	22.19	22.11	22.13	20.88	21.09	20.81	20.89
3	700.5	QPSK	22.67	22.64	22.77	21.74	21.77	21.76	21.73
		16QAM	22.04	21.98	22.08	20.85	20.87	20.83	20.82
	707.5	QPSK	22.68	22.76	22.75	21.81	21.85	21.82	21.83
		16QAM	22.05	22.10	22.09	20.91	20.94	20.88	20.86
	714.5	QPSK	22.85	22.87	22.87	21.96	21.95	21.95	21.87
		16QAM	22.09	22.09	22.20	20.96	20.94	20.91	20.87
1.4	699.7	QPSK	22.72	22.79	22.68	22.74	22.82	22.81	21.76
		16QAM	21.99	22.03	21.97	21.78	21.86	21.79	20.81
	707.5	QPSK	22.77	22.82	22.72	22.83	22.86	22.81	21.69
		16QAM	22.03	22.13	22.04	21.83	21.92	21.79	20.71
	715.3	QPSK	22.77	22.81	22.77	22.89	22.84	22.85	21.73
		16QAM	22.07	22.11	22.02	21.88	21.83	21.81	20.77

▪ Band 5

Conducted Power [dBm]									
RB Alloc			1 RB			MID RB			FULL RB
B.W(MHz)	Freq.(MHz)	Modulation	LOW	MID	HIGH	LOW	MID	HIGH	
10	829	QPSK	23.18	22.99	23.13	22.01	22.18	22.20	22.08
		16QAM	22.61	22.52	22.61	21.12	21.13	21.18	21.09
	836.5	QPSK	23.24	23.14	23.21	22.15	22.11	22.13	22.12
		16QAM	22.68	22.61	22.65	21.35	21.13	21.18	21.10
	844	QPSK	23.22	22.89	23.19	22.09	22.05	22.15	22.11
		16QAM	22.58	22.53	22.67	21.17	21.03	21.11	21.13
5	826.5	QPSK	23.10	23.18	23.13	21.99	22.18	22.01	22.03
		16QAM	22.44	22.44	22.26	20.94	21.08	21.15	21.05
	836.5	QPSK	23.18	23.09	23.08	22.14	22.11	22.14	22.11
		16QAM	22.56	22.43	22.41	21.08	21.14	21.08	21.17
	846.5	QPSK	22.84	22.99	23.01	21.88	21.94	22.04	21.97
		16QAM	22.19	22.34	22.15	20.94	20.98	21.01	20.99
3	825.5	QPSK	23.15	22.94	23.12	21.99	22.02	21.98	21.97
		16QAM	22.43	22.40	22.42	21.03	21.05	21.03	21.02
	836.5	QPSK	23.23	23.06	23.12	22.06	22.14	22.08	22.11
		16QAM	22.50	22.38	22.42	21.15	21.16	21.12	21.16
	847.5	QPSK	23.09	23.05	23.14	21.99	22.12	22.05	22.01
		16QAM	22.37	22.52	22.40	21.00	21.14	21.09	21.04
1.4	824.7	QPSK	23.11	23.17	23.10	22.50	22.55	22.42	22.04
		16QAM	22.42	22.52	22.42	22.26	22.32	22.14	21.08
	836.5	QPSK	23.24	23.19	23.15	22.57	22.59	22.50	22.05
		16QAM	22.55	22.58	22.54	22.31	22.29	22.21	21.09
	848.3	QPSK	23.09	23.12	23.10	22.43	22.50	22.43	21.97
		16QAM	22.42	22.47	22.37	22.17	22.28	22.22	21.02

• Band 2

Conducted Power [dBm]									
RB Alloc			1 RB			MID RB			FULL RB
B.W(MHz)	Freq.(MHz)	Modulation	LOW	MID	HIGH	LOW	MID	HIGH	
20	1 860	QPSK	23.40	23.10	23.47	22.06	21.96	22.10	22.03
		16QAM	22.63	22.50	22.61	21.31	21.39	21.28	21.32
	1 880	QPSK	23.41	23.13	23.28	21.98	21.89	21.99	21.94
		16QAM	22.61	22.42	22.59	21.32	21.21	21.26	21.26
	1 900	QPSK	23.37	23.05	23.29	22.05	21.87	22.05	22.03
		16QAM	22.65	22.37	22.64	21.25	21.23	21.13	21.32
15	1 857.5	QPSK	23.34	23.26	23.33	22.00	21.93	21.92	21.95
		16QAM	22.54	22.47	22.59	21.29	21.22	21.33	21.35
	1 880	QPSK	23.33	23.12	23.18	21.90	21.96	21.88	21.94
		16QAM	22.54	22.40	22.55	21.29	21.20	21.27	21.26
	1 902.5	QPSK	23.41	23.27	23.42	21.99	21.92	21.99	22.02
		16QAM	22.64	22.43	22.65	21.25	21.25	21.35	21.31
10	1 855	QPSK	23.16	23.10	23.16	21.85	21.85	21.70	21.71
		16QAM	22.48	22.29	22.43	21.25	21.33	21.22	21.23
	1 880	QPSK	23.24	23.07	23.23	21.84	21.85	21.79	21.82
		16QAM	22.48	22.36	22.56	21.26	21.23	21.22	21.25
	1 905	QPSK	23.27	23.10	23.60	21.97	21.87	21.91	21.96
		16QAM	22.52	22.35	22.59	21.31	21.31	21.37	21.35
5	1 852.5	QPSK	23.27	23.27	23.06	21.69	21.63	21.65	21.60
		16QAM	22.46	22.39	22.29	21.23	21.17	21.21	21.14
	1 880	QPSK	23.23	23.16	22.94	21.83	21.76	21.71	21.76
		16QAM	22.40	22.38	22.26	21.31	21.31	21.28	21.37
	1 907.5	QPSK	23.23	23.11	23.13	21.82	21.77	21.77	21.72
		16QAM	22.56	22.43	22.37	21.37	21.35	21.32	21.32
3	1 851.5	QPSK	23.25	23.29	23.23	21.62	21.62	21.56	21.59
		16QAM	22.30	22.37	22.31	21.21	21.22	21.17	21.15
	1 880	QPSK	23.07	23.07	23.01	21.72	21.75	21.71	21.74
		16QAM	22.27	22.31	22.21	21.31	21.36	21.31	21.31
	1 908.5	QPSK	23.12	23.11	23.07	21.77	21.79	21.74	21.75
		16QAM	22.43	22.47	22.32	21.39	21.39	21.36	21.36
1.4	1 850.7	QPSK	22.81	22.87	22.79	22.51	22.54	22.48	21.52
		16QAM	22.11	22.17	22.09	21.61	21.65	21.60	21.13
	1 880	QPSK	22.96	23.04	22.98	22.75	22.71	22.63	21.66
		16QAM	22.20	22.39	22.23	21.77	21.77	21.68	21.27
	1 909.3	QPSK	23.03	23.03	22.98	22.68	22.73	22.65	21.67
		16QAM	22.31	22.39	22.24	21.82	21.82	21.78	21.34

• Band 4

Conducted Power [dBm]									
RB Alloc			1 RB			MID RB			FULL RB
B.W(MHz)	Freq.(MHz)	Modulation	LOW	MID	HIGH	LOW	MID	HIGH	
20	1720	QPSK	23.36	23.10	23.10	22.38	22.22	22.21	22.17
		16QAM	22.68	22.27	22.41	21.68	21.66	21.68	21.68
	1732.5	QPSK	23.23	22.96	23.18	22.19	22.13	22.16	22.12
		16QAM	22.56	22.21	22.43	21.69	21.63	21.61	21.59
	1745	QPSK	23.26	23.03	23.00	22.15	22.12	22.09	22.20
		16QAM	22.58	22.18	22.32	21.65	21.60	21.54	21.62
15	1717.5	QPSK	23.39	23.06	23.27	22.28	22.19	22.20	22.16
		16QAM	22.69	22.37	22.53	21.69	21.65	21.62	21.64
	1732.5	QPSK	23.22	23.01	23.16	22.15	22.15	22.19	22.17
		16QAM	22.40	22.27	22.45	21.56	21.57	21.62	21.60
	1747.5	QPSK	23.36	23.10	23.21	22.34	22.21	22.11	22.19
		16QAM	22.65	22.36	22.39	21.62	21.60	21.55	21.64
10	1715	QPSK	23.39	23.18	23.35	22.27	22.17	22.17	22.20
		16QAM	22.65	22.27	22.46	21.61	21.63	21.64	21.64
	1732.5	QPSK	23.48	23.19	23.40	22.19	22.08	22.17	22.19
		16QAM	22.64	22.26	22.35	21.60	21.50	21.65	21.64
	1750	QPSK	23.49	23.07	23.21	22.29	22.09	22.04	22.16
		16QAM	22.52	22.22	22.37	21.64	21.54	21.52	21.63
5	1712.5	QPSK	23.37	23.33	23.21	22.13	22.14	22.07	22.13
		16QAM	22.30	22.25	22.18	21.51	21.58	21.48	21.58
	1732.5	QPSK	23.44	23.48	23.34	22.25	22.20	22.10	22.04
		16QAM	22.33	22.37	22.25	21.65	21.60	21.54	21.47
	1752.5	QPSK	23.25	23.09	22.99	22.02	21.94	21.88	21.93
		16QAM	22.31	22.12	22.02	21.45	21.34	21.32	21.36
3	1711.5	QPSK	23.31	23.35	23.19	22.16	22.17	22.08	22.18
		16QAM	22.28	22.17	22.14	21.62	21.67	21.54	21.54
	1732.5	QPSK	23.26	23.32	23.13	22.08	22.01	22.03	22.08
		16QAM	22.34	22.29	22.22	21.65	21.57	21.60	21.55
	1753.5	QPSK	22.99	22.98	22.90	21.92	21.93	21.88	21.91
		16QAM	22.20	22.12	22.17	21.53	21.51	21.46	21.42
1.4	1710.7	QPSK	22.99	23.12	23.11	23.04	23.13	23.09	22.11
		16QAM	22.16	22.30	22.15	22.05	22.12	22.05	21.60
	1732.5	QPSK	22.98	23.02	22.91	22.99	23.05	23.02	22.02
		16QAM	22.25	22.27	22.11	22.03	22.10	22.10	21.55
	1754.3	QPSK	22.82	22.89	22.80	22.87	22.91	22.86	21.90
		16QAM	22.06	22.18	22.01	21.91	21.95	21.93	21.41

7.2 ERP & EIRP

- Test Notes

- 1) This is device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the below table.

▪ LTE Band 12

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
10	704	QPSK	1/0	V	21.36	-0.65	20.71	0.118
		16QAM	1/0	V	20.47	-0.65	19.82	0.096
	711	QPSK	1/25	V	21.42	-0.63	20.79	0.120
		16QAM	1/25	V	20.45	-0.63	19.82	0.096
5	701.5	QPSK	1/0	V	20.94	-0.66	20.28	0.107
		16QAM	1/0	V	19.75	-0.66	19.09	0.081
	707.5	QPSK	1/24	V	20.65	-0.64	20.01	0.100
		16QAM	1/24	V	19.72	-0.64	19.08	0.081
	713.5	QPSK	1/12	V	21.73	-0.62	21.11	0.129
		16QAM	1/12	V	20.66	-0.62	20.04	0.101
3	700.5	QPSK	1/0	V	20.66	-0.66	20.00	0.100
		16QAM	1/0	V	19.83	-0.66	19.17	0.083
	707.5	QPSK	1/14	V	20.95	-0.64	20.31	0.107
		16QAM	1/14	V	20.08	-0.64	19.44	0.088
	714.5	QPSK	1/0	V	20.97	-0.62	20.35	0.108
		16QAM	1/0	V	20.14	-0.62	19.52	0.090
1.4	699.7	QPSK	1/0	V	20.48	-0.66	19.82	0.096
		16QAM	1/0	V	19.63	-0.66	18.97	0.079
	707.5	QPSK	1/5	V	21.02	-0.64	20.38	0.109
		16QAM	1/5	V	20.18	-0.64	19.54	0.090
	715.3	QPSK	1/2	V	21.27	-0.62	20.65	0.116
		16QAM	1/2	V	20.21	-0.62	19.59	0.091

LTE Band 2

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	1 860	QPSK	1/50	V	19.74	4.80	24.54	0.284
		16QAM	1/50	V	18.96	4.80	23.76	0.238
	1 880	QPSK	1/0	V	20.20	4.60	24.80	0.302
		16QAM	1/0	V	19.48	4.60	24.08	0.256
	1 900	QPSK	1/99	V	21.18	4.40	25.58	0.361
		16QAM	1/99	V	20.42	4.40	24.82	0.303
15	1 857.5	QPSK	1/36	V	19.46	4.83	24.29	0.269
		16QAM	1/36	V	18.59	4.83	23.42	0.220
	1 880	QPSK	1/0	V	20.46	4.60	25.06	0.321
		16QAM	1/0	V	19.51	4.60	24.11	0.258
	1 902.5	QPSK	1/74	V	21.14	4.41	25.55	0.359
		16QAM	1/74	V	20.31	4.41	24.72	0.296
10	1 855	QPSK	1/49	V	19.40	4.85	24.25	0.266
		16QAM	1/49	V	18.59	4.85	23.44	0.221
	1 880	QPSK	1/0	V	20.32	4.60	24.92	0.310
		16QAM	1/0	V	19.53	4.60	24.13	0.259
	1 905	QPSK	1/49	V	20.94	4.42	25.36	0.344
		16QAM	1/49	V	20.06	4.42	24.48	0.281
5	1 852.5	QPSK	1/24	V	18.91	4.88	23.79	0.239
		16QAM	1/24	V	18.12	4.88	23.00	0.200
	1 880	QPSK	1/0	V	19.61	4.60	24.21	0.264
		16QAM	1/0	V	18.66	4.60	23.26	0.212
	1 907.5	QPSK	1/24	V	20.84	4.43	25.27	0.337
		16QAM	1/24	V	20.05	4.43	24.48	0.281
3	1 851.5	QPSK	1/7	V	19.02	4.89	23.91	0.246
		16QAM	1/7	V	18.16	4.89	23.05	0.202
	1 880	QPSK	1/0	V	20.09	4.60	24.69	0.294
		16QAM	1/0	V	19.30	4.60	23.90	0.245
	1 908.5	QPSK	1/7	V	20.96	4.43	25.39	0.346
		16QAM	1/7	V	20.16	4.43	24.59	0.288
1.4	1 850.7	QPSK	1/2	V	18.77	4.89	23.66	0.232
		16QAM	1/2	V	17.98	4.89	22.87	0.194
	1 880	QPSK	1/0	V	19.91	4.60	24.51	0.282
		16QAM	1/0	V	18.74	4.60	23.34	0.216
	1 909.3	QPSK	1/2	V	20.74	4.44	25.18	0.330
		16QAM	1/2	V	19.90	4.44	24.34	0.272

7.3 UNDESIRABLE EMISSIONS (Radiated)

- Test Notes

Note 1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 2: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

▪ LTE Band 12

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result (dBm)	Limit (dBm)	Margin (dB)
10	704	1/0	QPSK	1 396.72	V	-67.23	2.38	-64.85	-13.00	51.85
				2 097.48	V	-63.46	3.04	-60.42		47.42
		1/0	16QAM	1 395.85	V	-67.29	2.37	-64.92		51.92
				2 094.00	V	-63.52	3.03	-60.49		47.49
	711	1/25	QPSK	1 424.91	V	-68.03	2.55	-65.48		52.48
				2 135.09	V	-63.10	3.19	-59.91		46.91
		1/25	16QAM	1 424.53	V	-67.63	2.55	-65.08		52.08
				2 137.65	V	-62.91	3.20	-59.71		46.71
5	713.5	1/12	16QAM	1 425.76	V	-67.65	2.55	-65.10	-13.00	52.10
				2 141.51	V	-63.05	3.22	-59.83		46.83

▪ LTE Band 2

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result (dBm)	Limit (dBm)	Margin (dB)
20	1 860	1/50	QPSK	3 721.01	V	-64.17	8.34	-55.83	-13.00	42.83
		1/50	16QAM	3 715.50	V	-63.82	8.33	-55.49		42.49
	1 880	1/0	QPSK	3 739.06	V	-64.18	8.38	-55.80		42.80
		1/0	16QAM	3 742.92	V	-64.13	8.39	-55.74		42.74
	1 900	1/99	QPSK	3 819.92	V	-64.30	8.50	-55.80		42.80
		1/99	16QAM	3 821.81	V	-64.36	8.50	-55.86		42.86