




NR band 77/78 Low Band (IC)

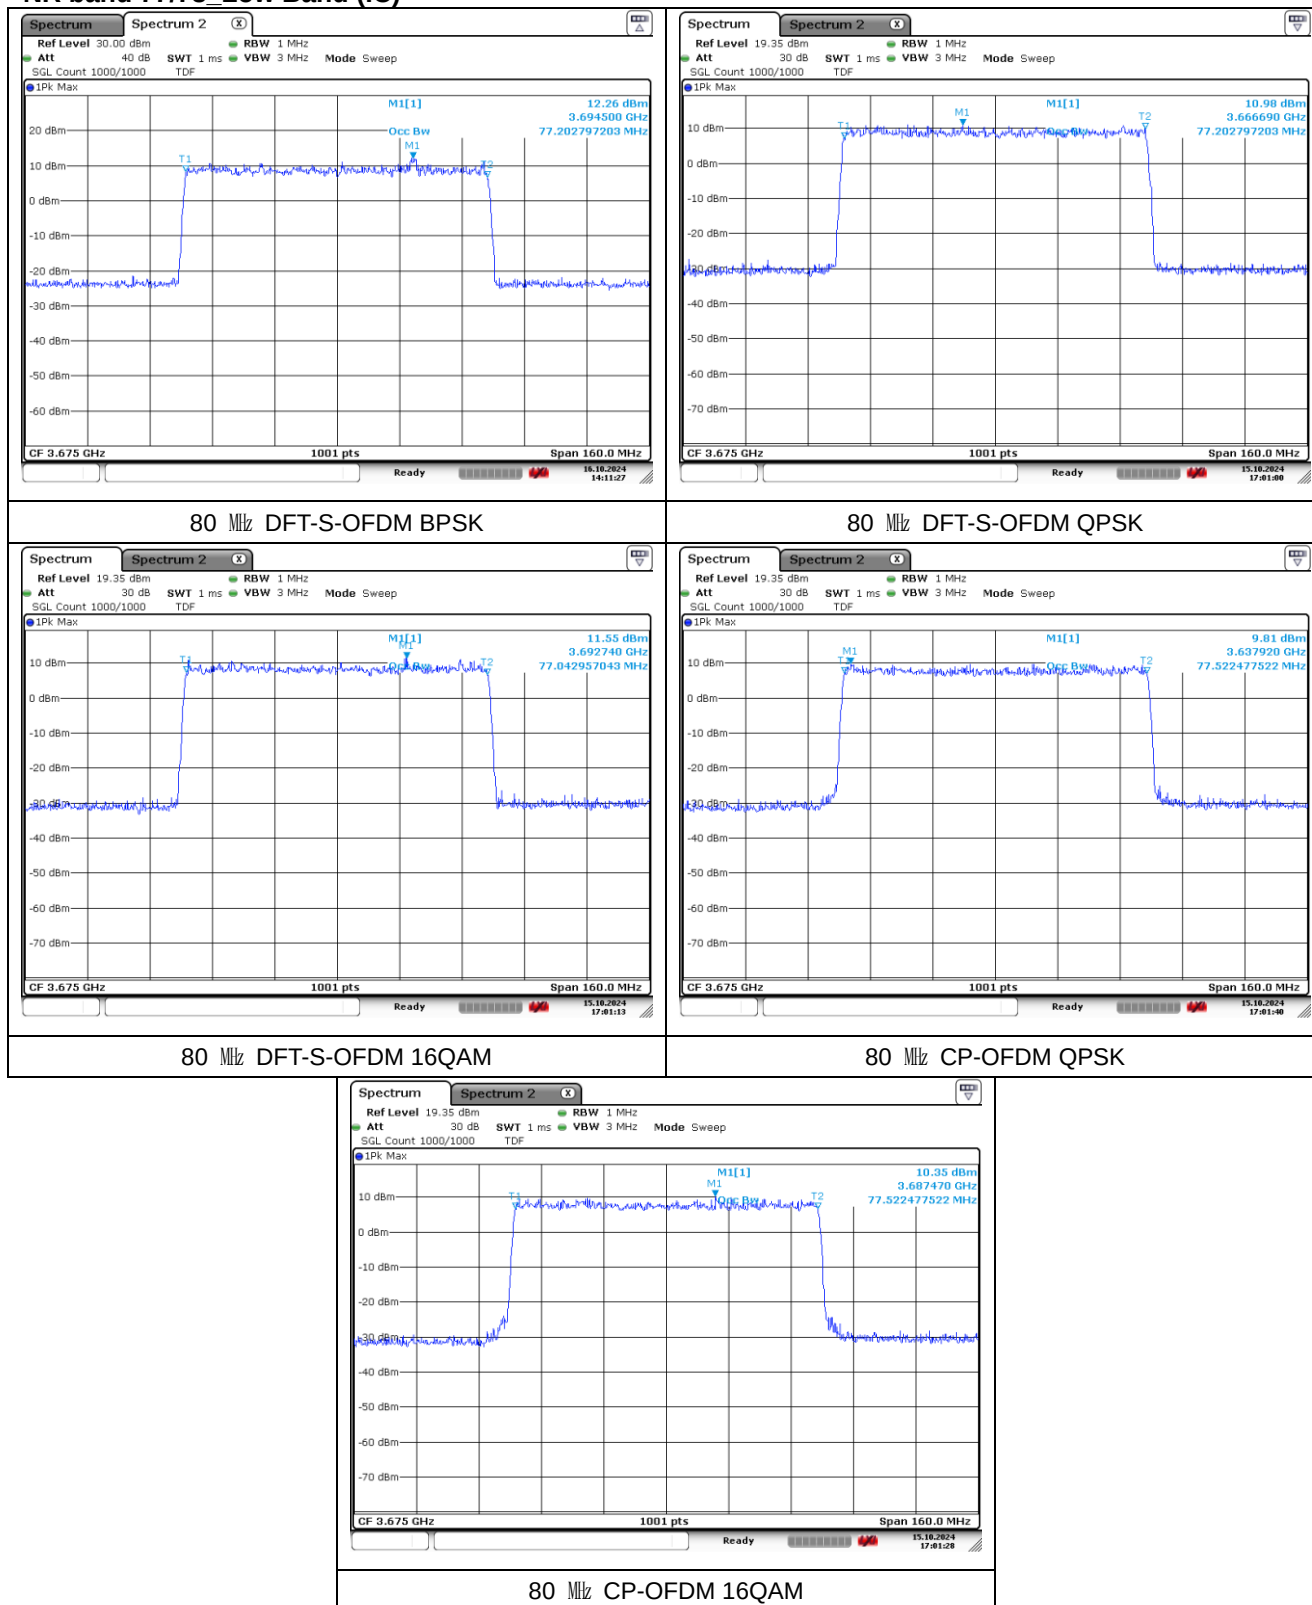


NR band 77/78 Low Band (IC)

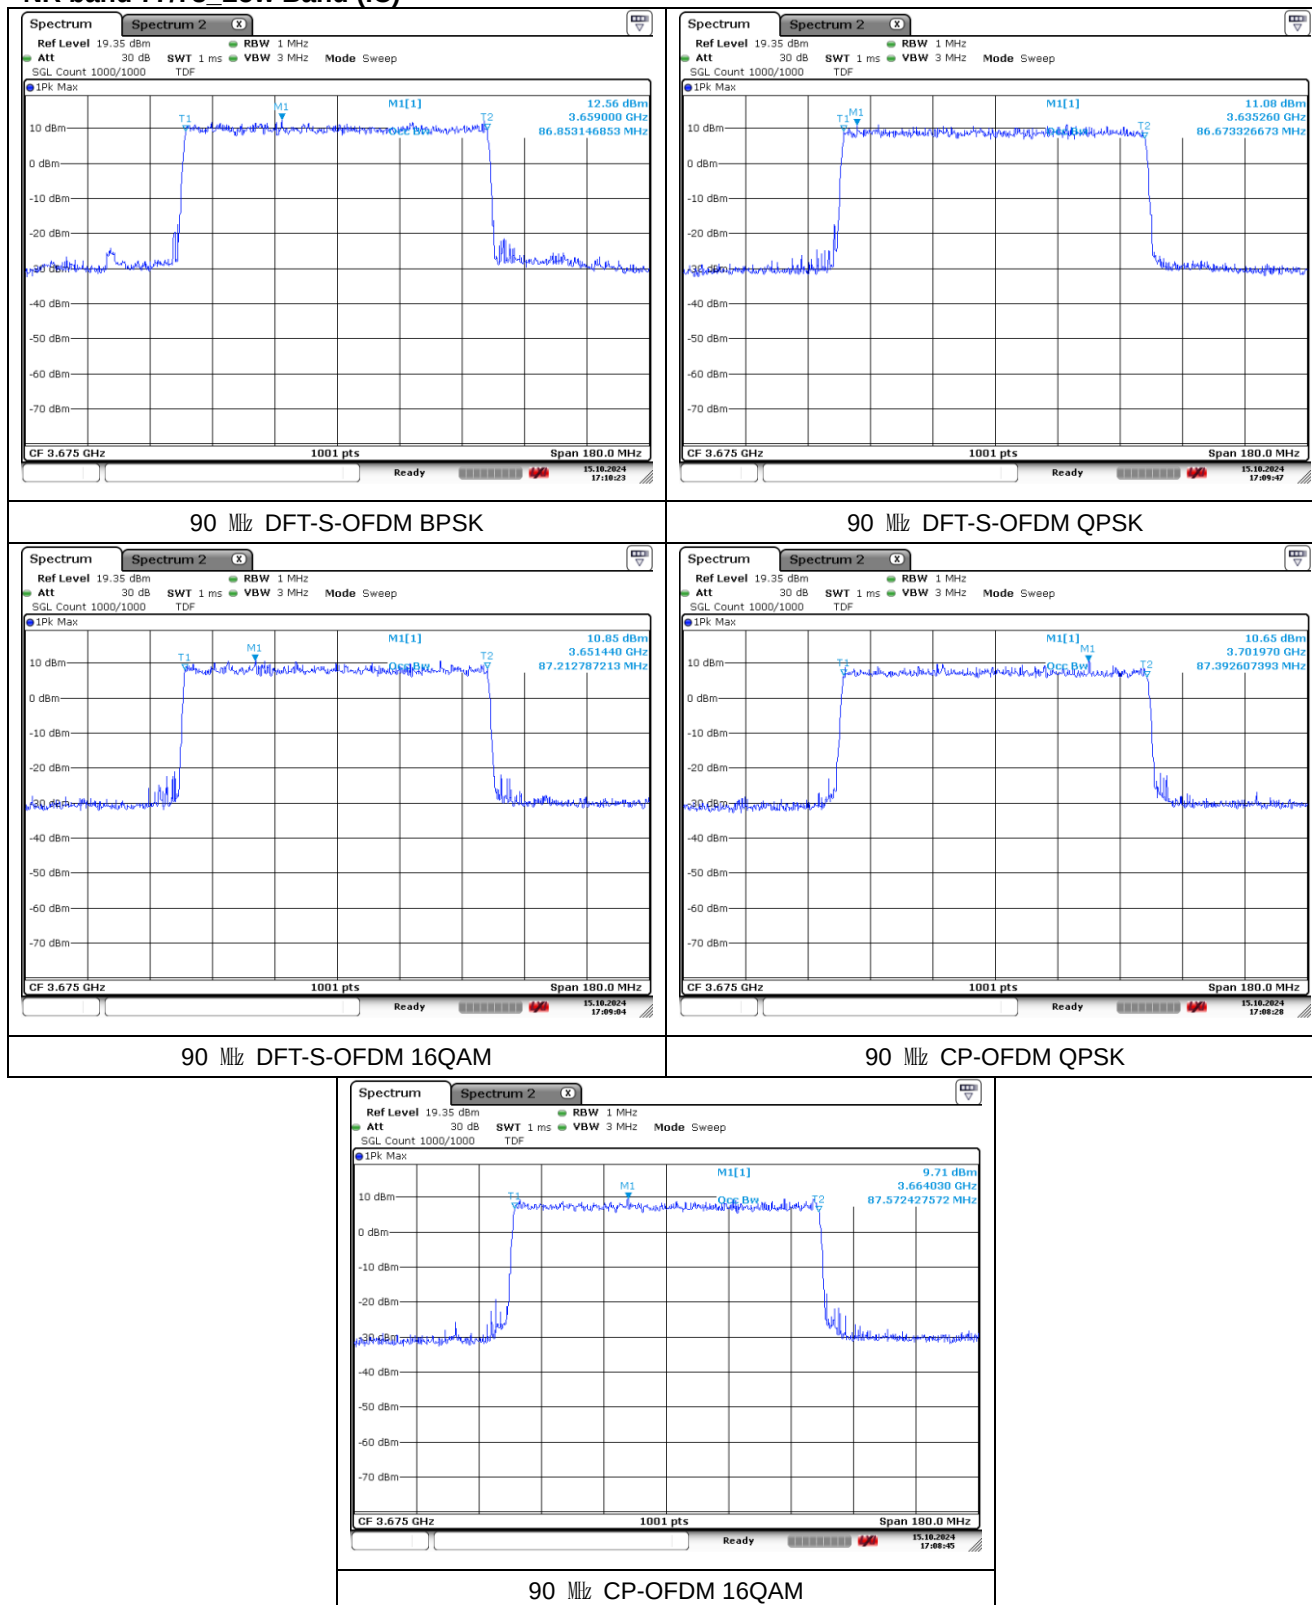


NR band 77/78 Low Band (IC)

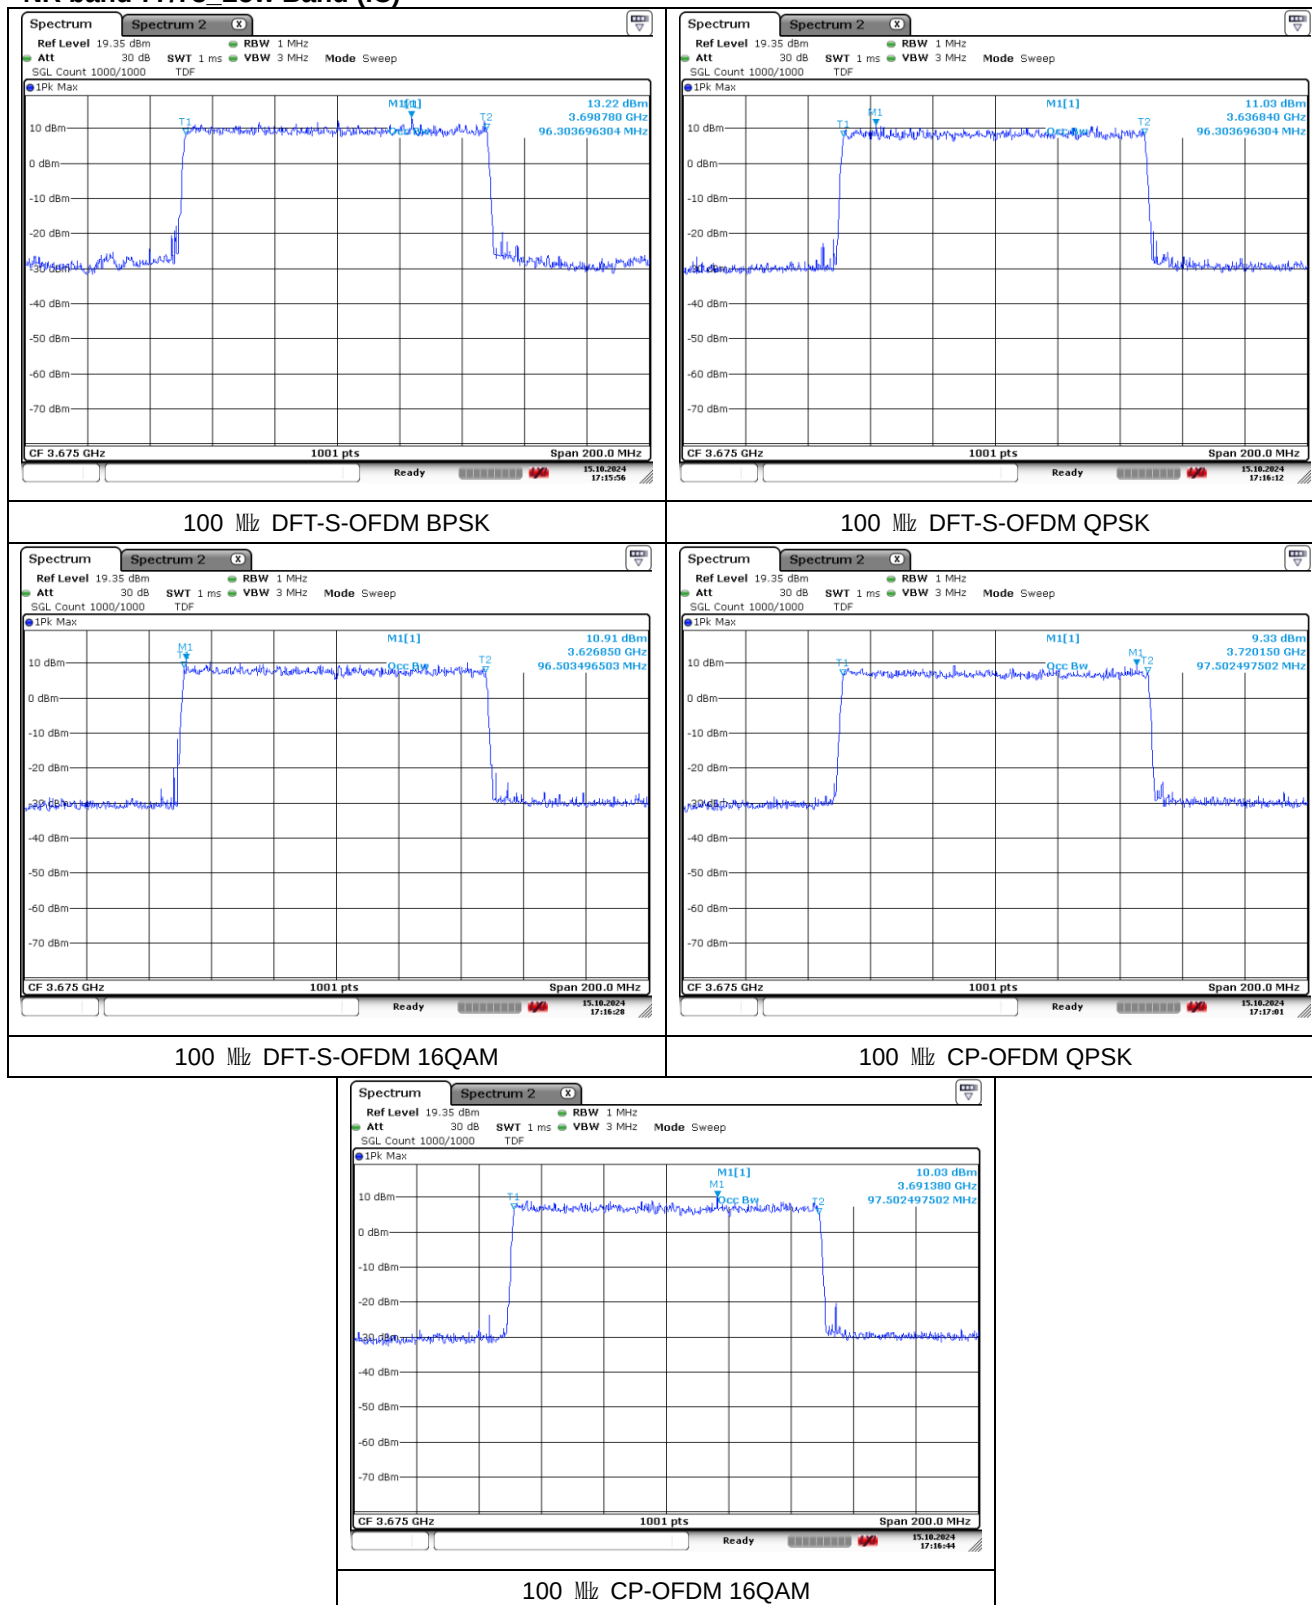


NR band 77_High Band (IC)

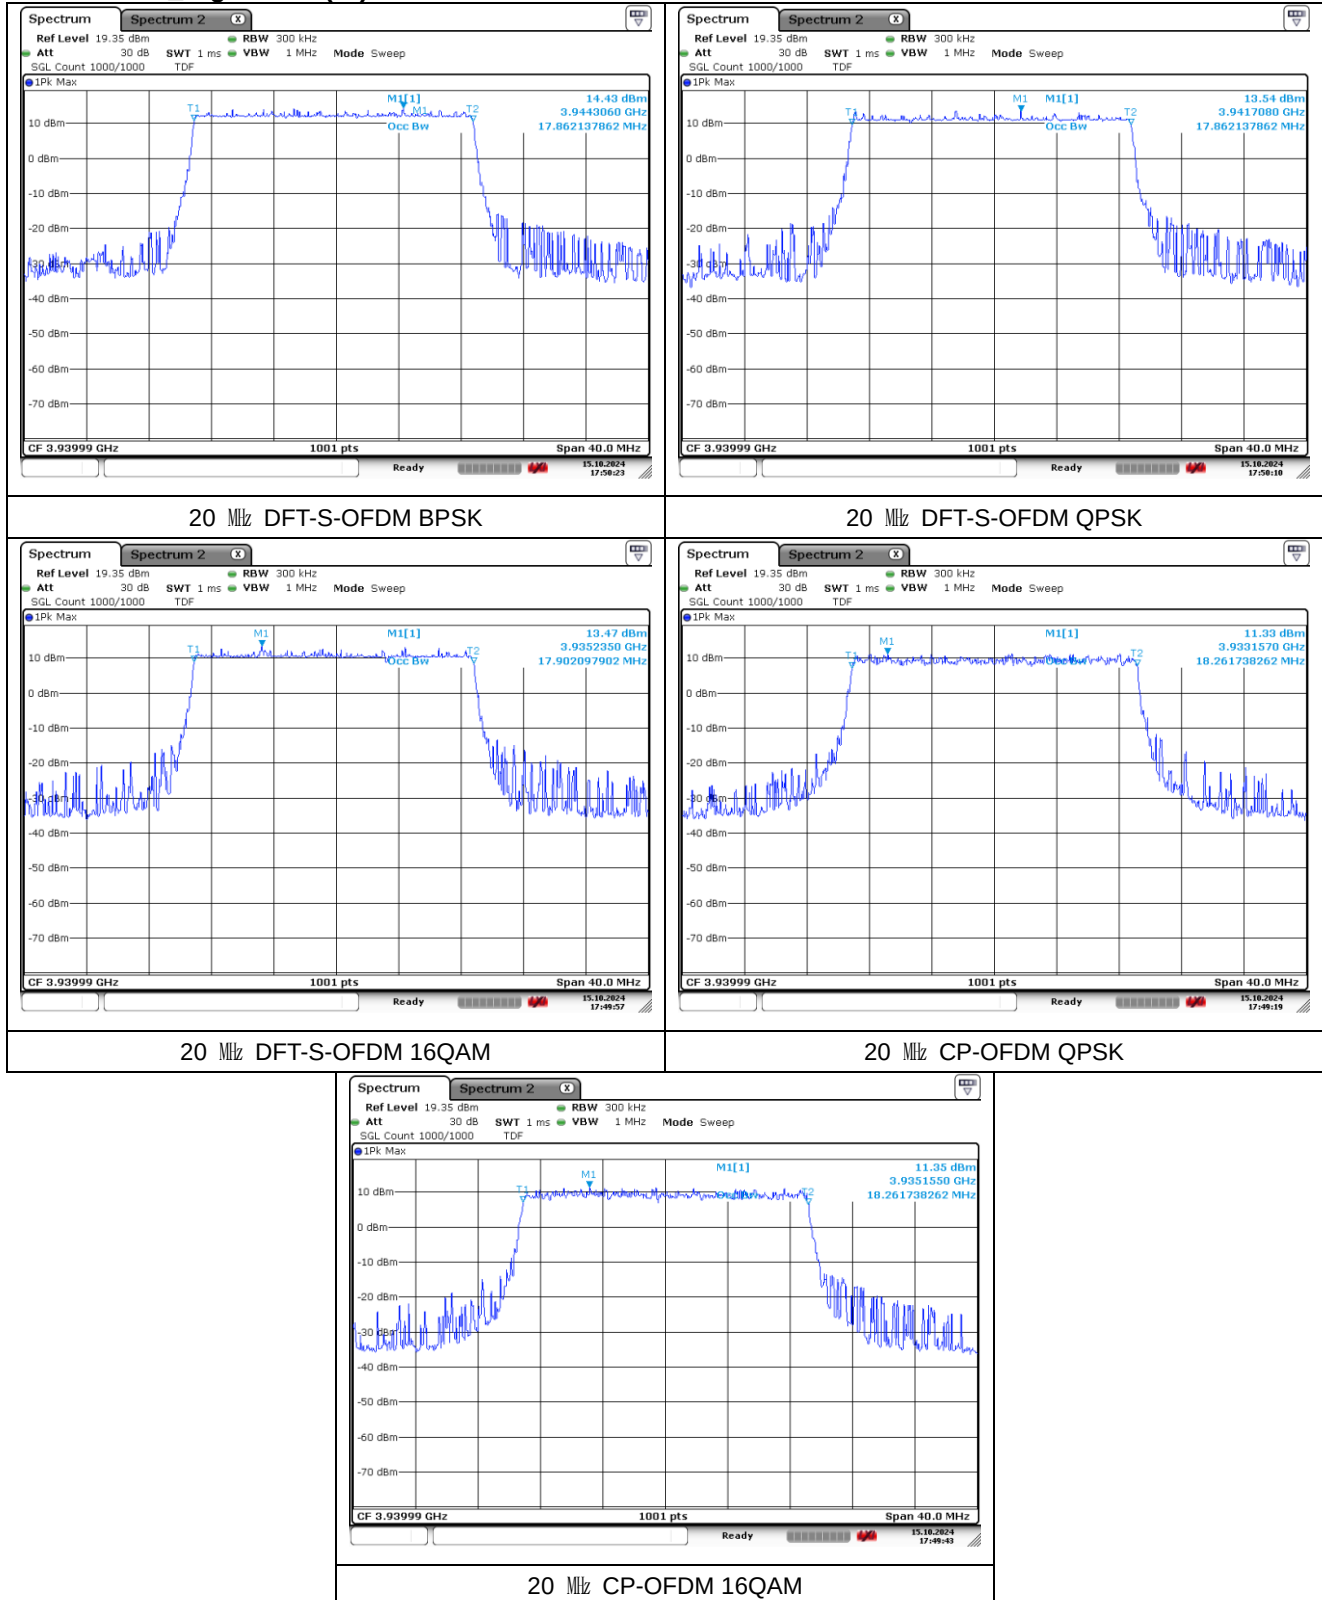


NR band 77_High Band (IC)

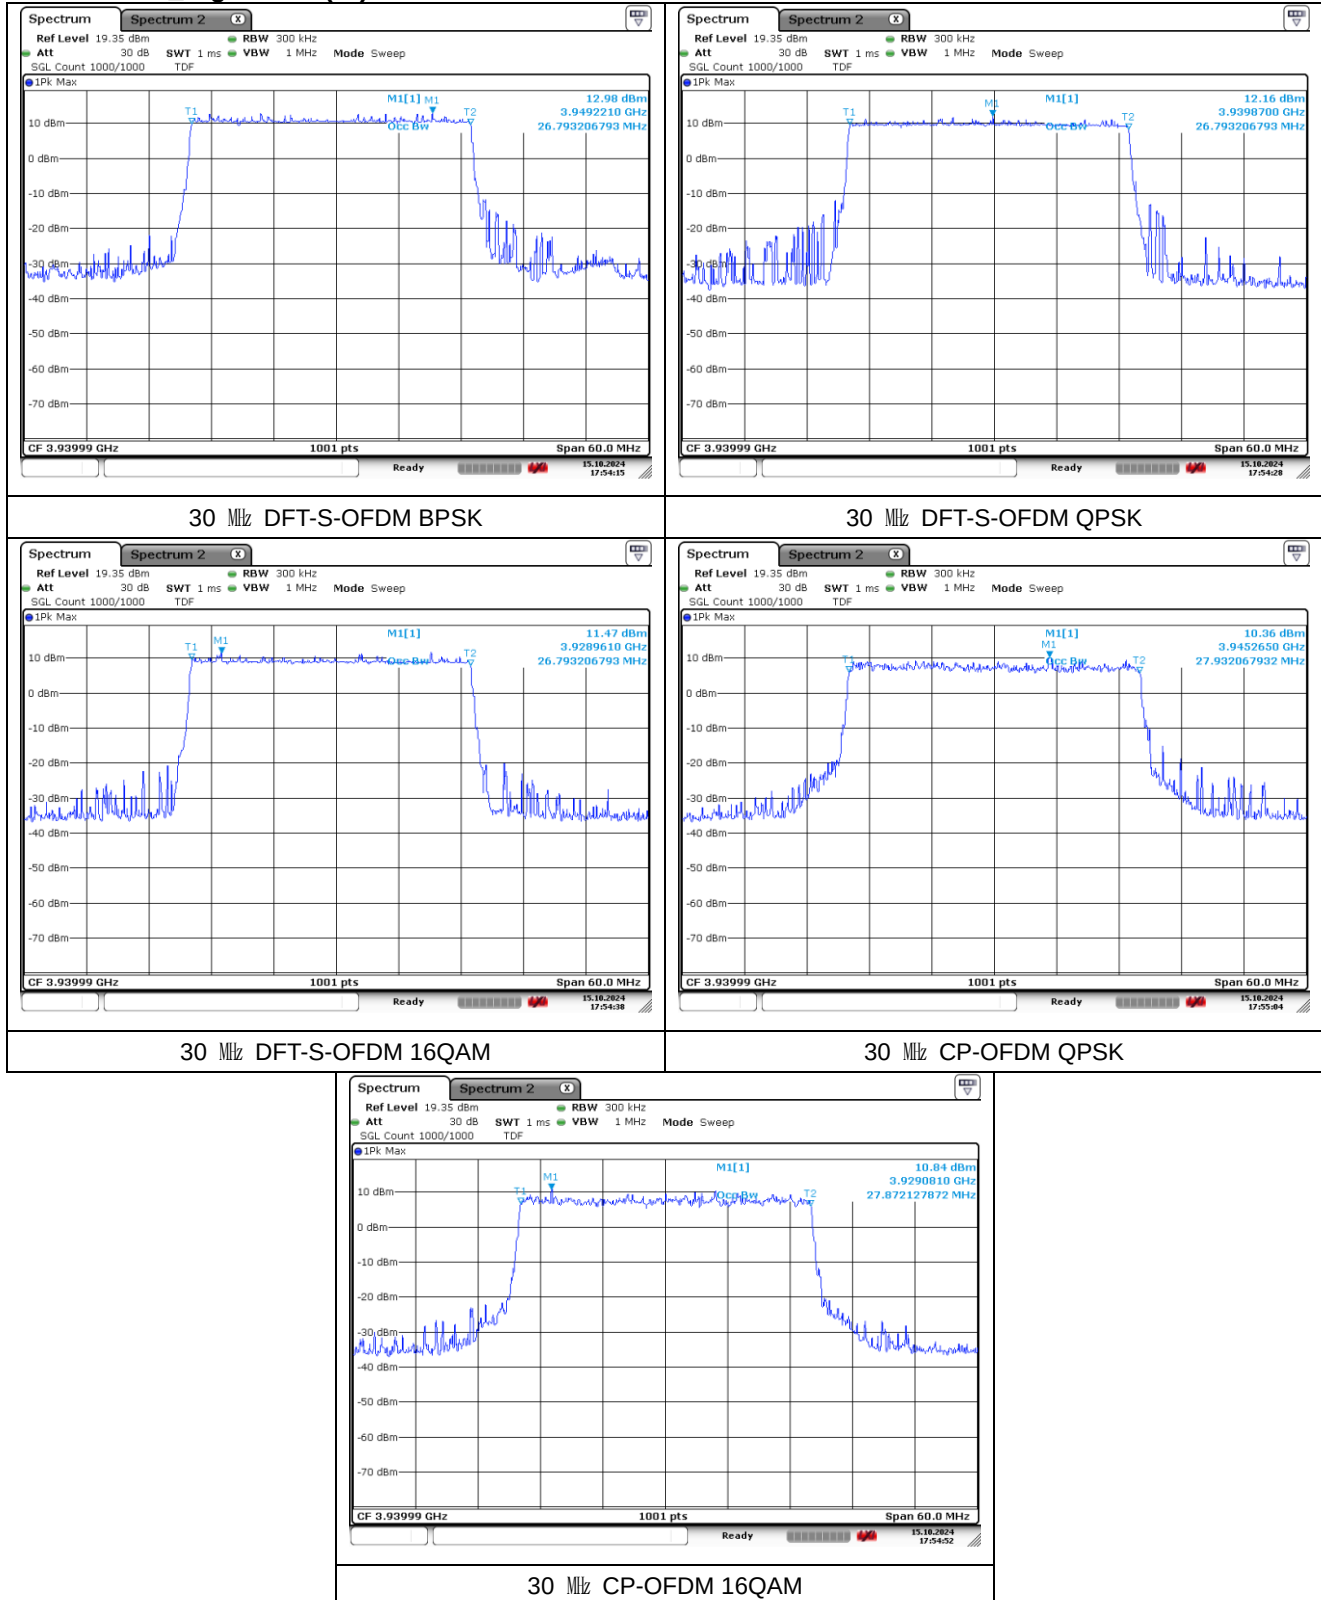


NR band 77_High Band (IC)

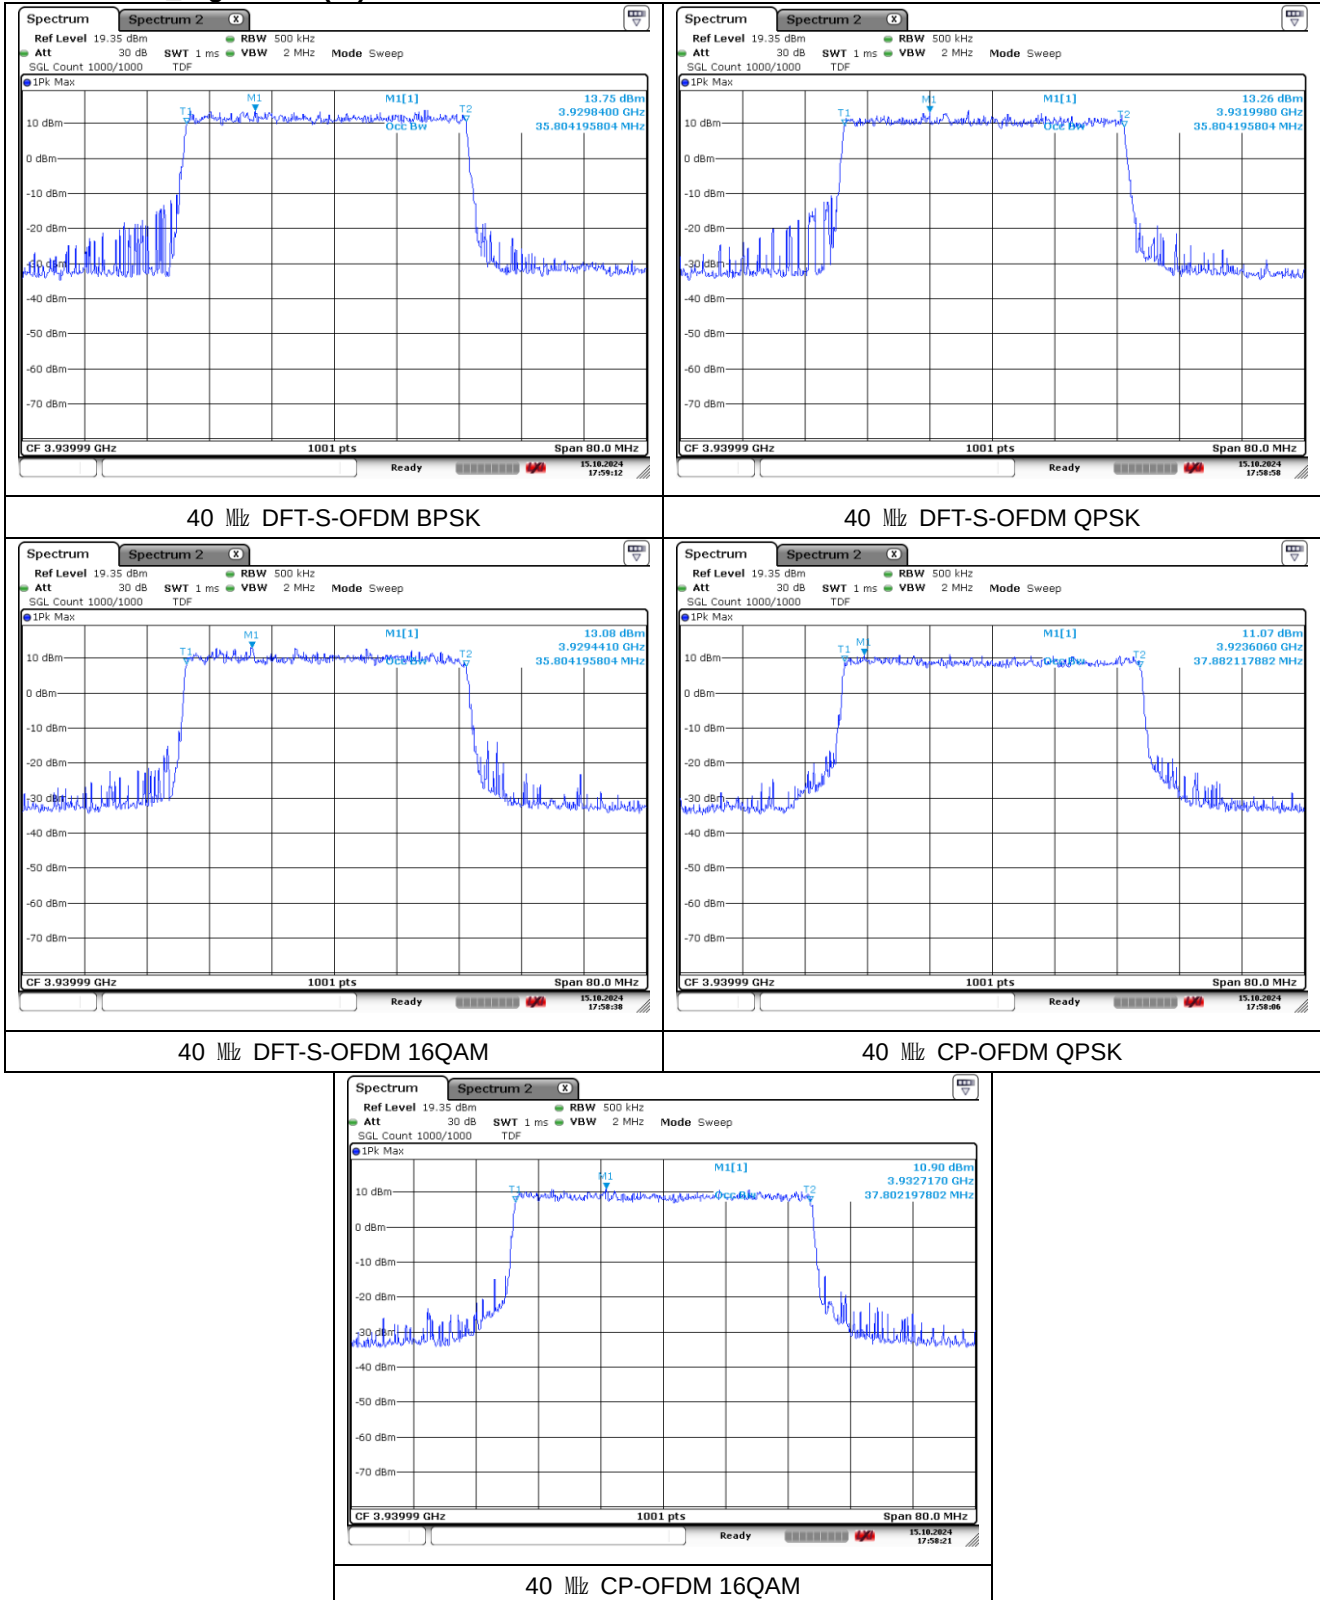


NR band 77_High Band (IC)

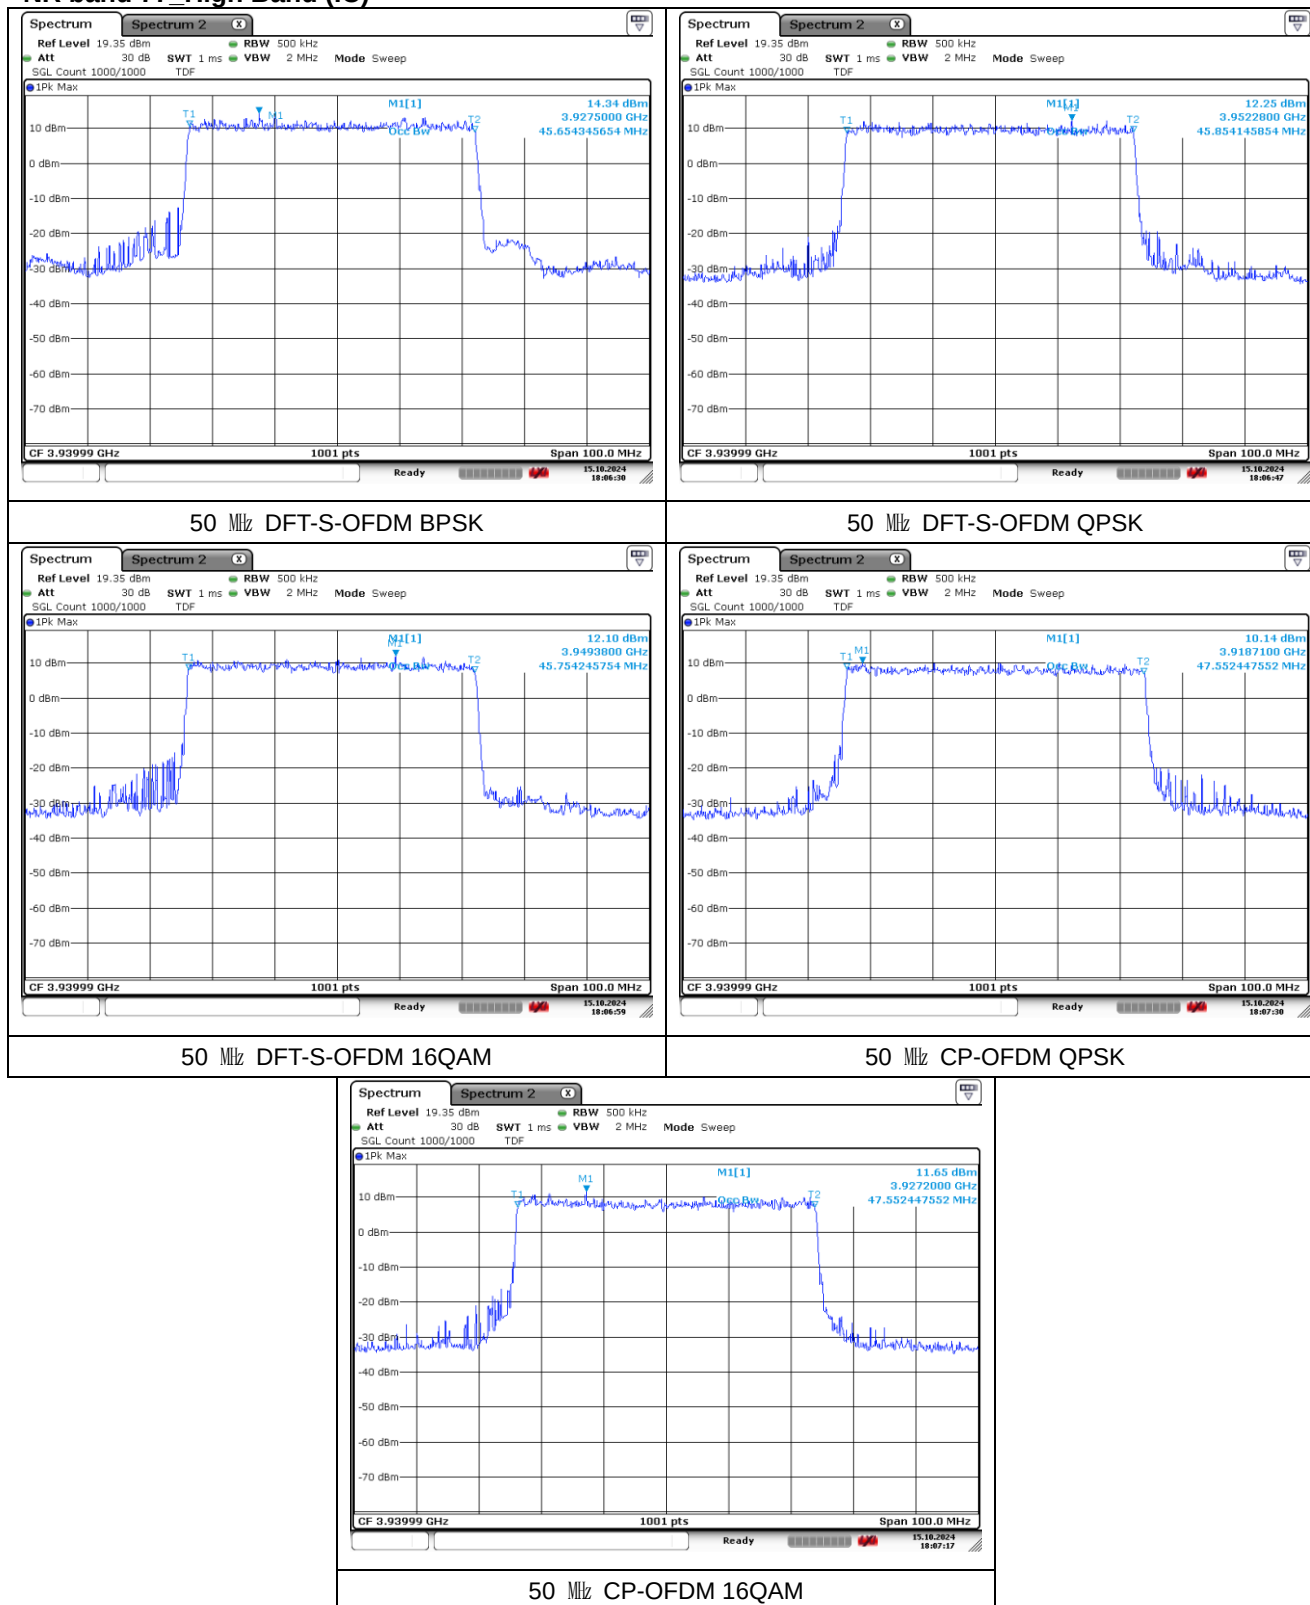


NR band 77_High Band (IC)

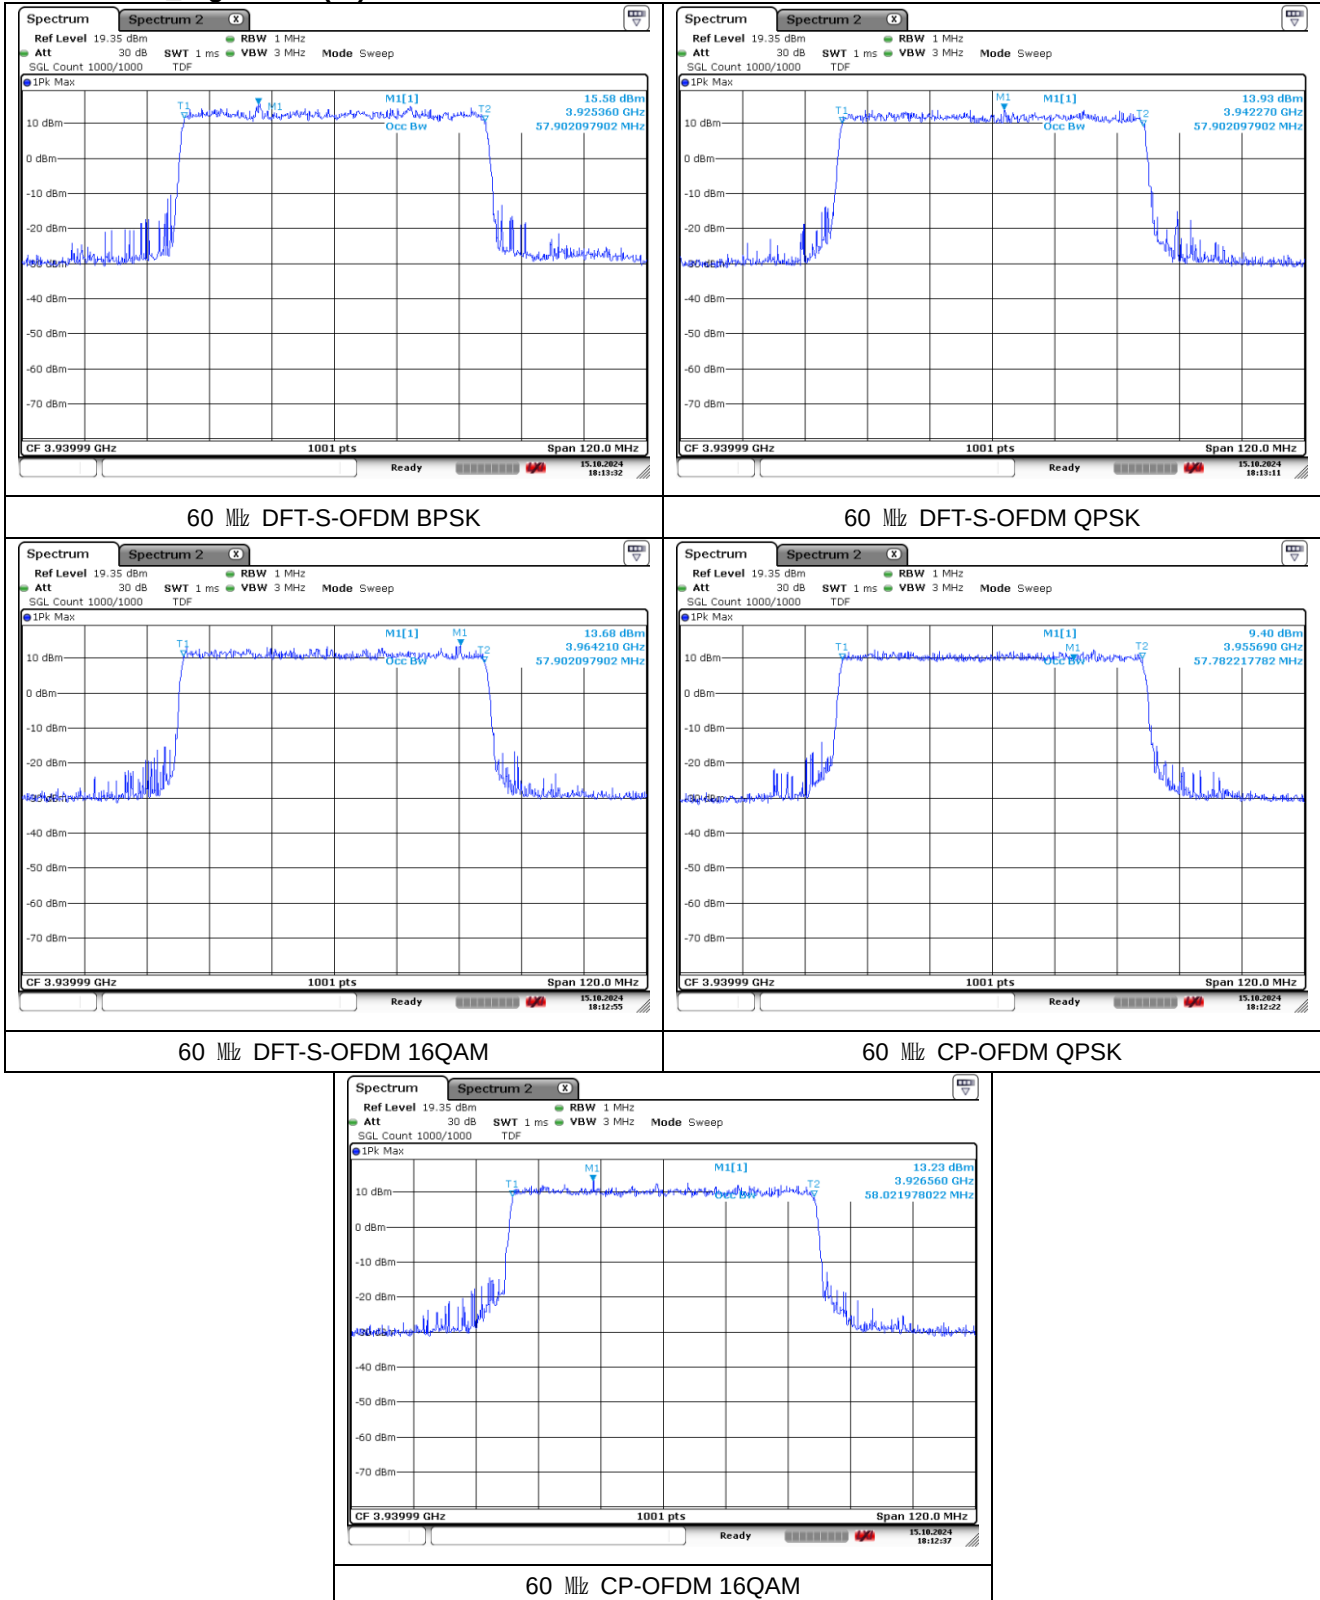

NR band 77_High Band (IC)

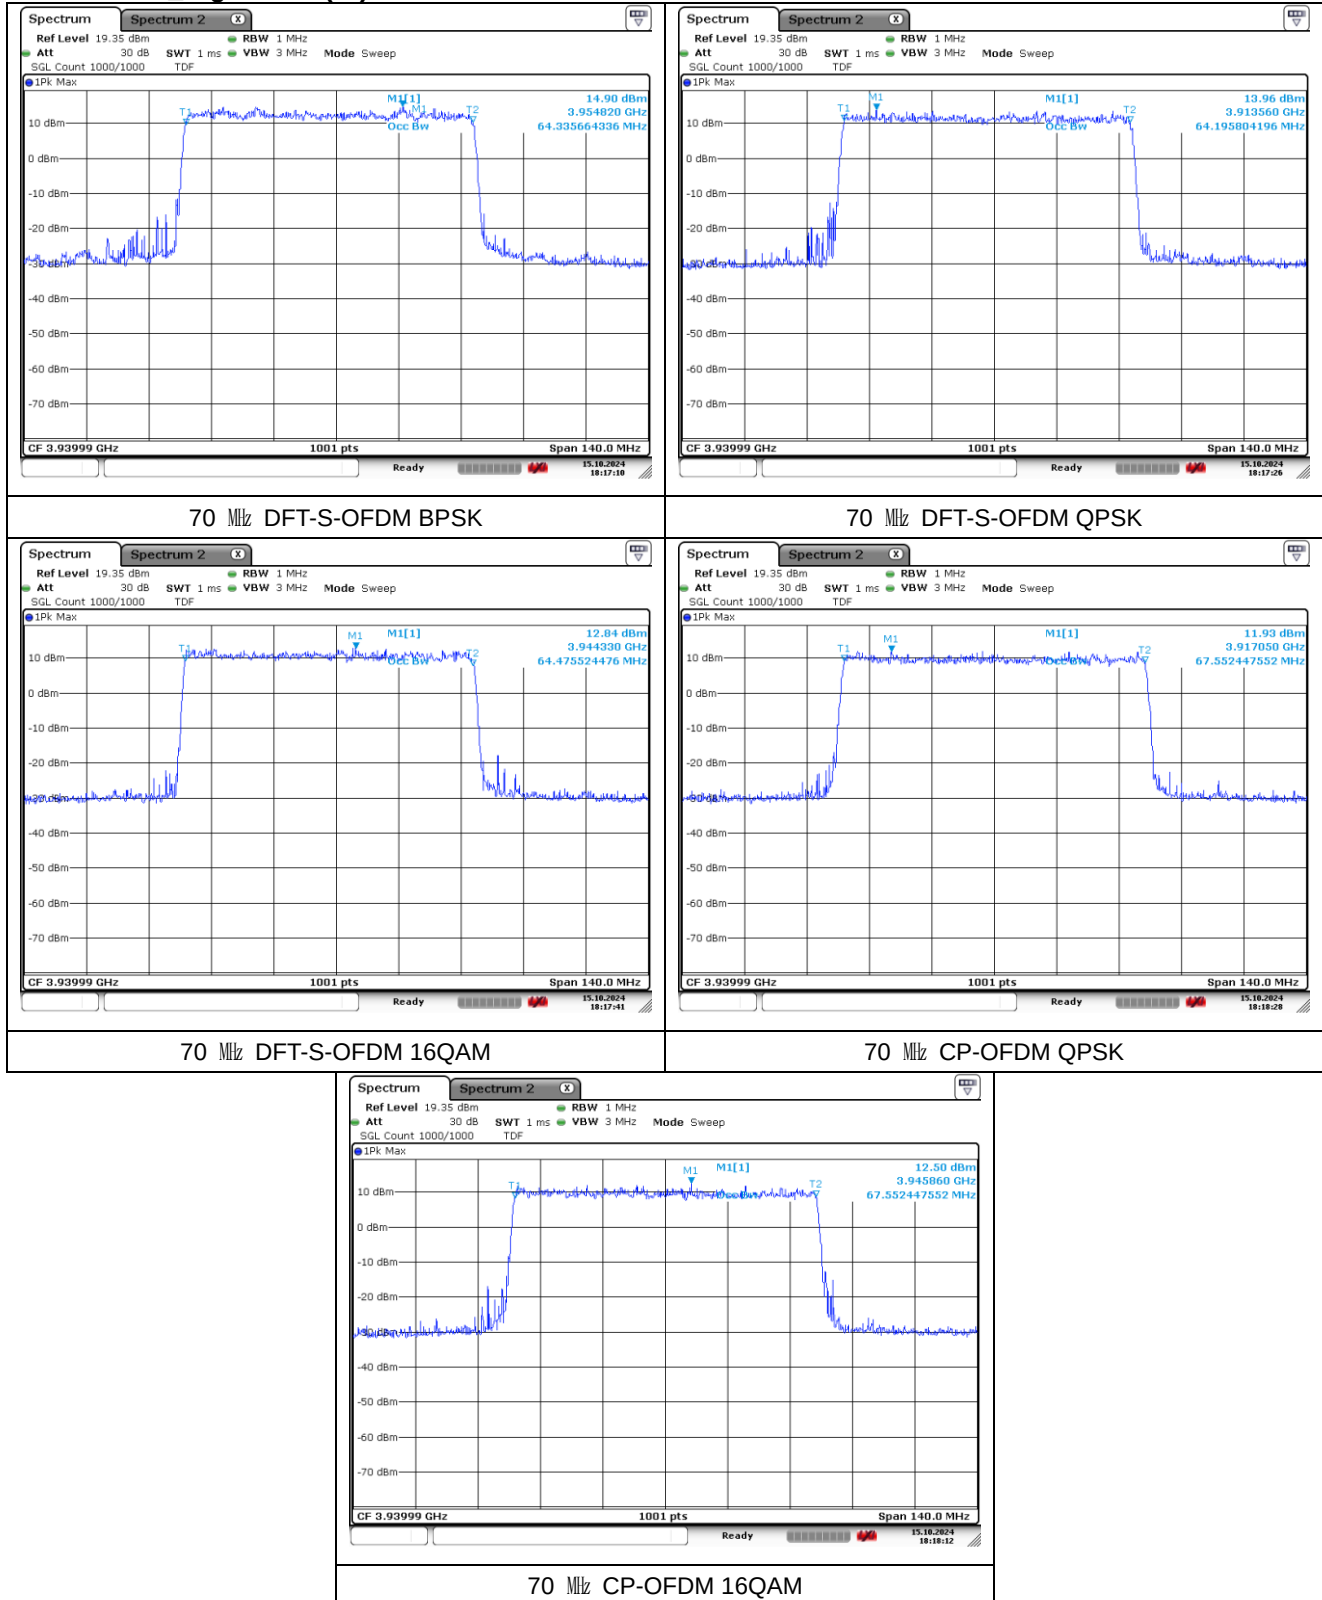

NR band 77_High Band (IC)

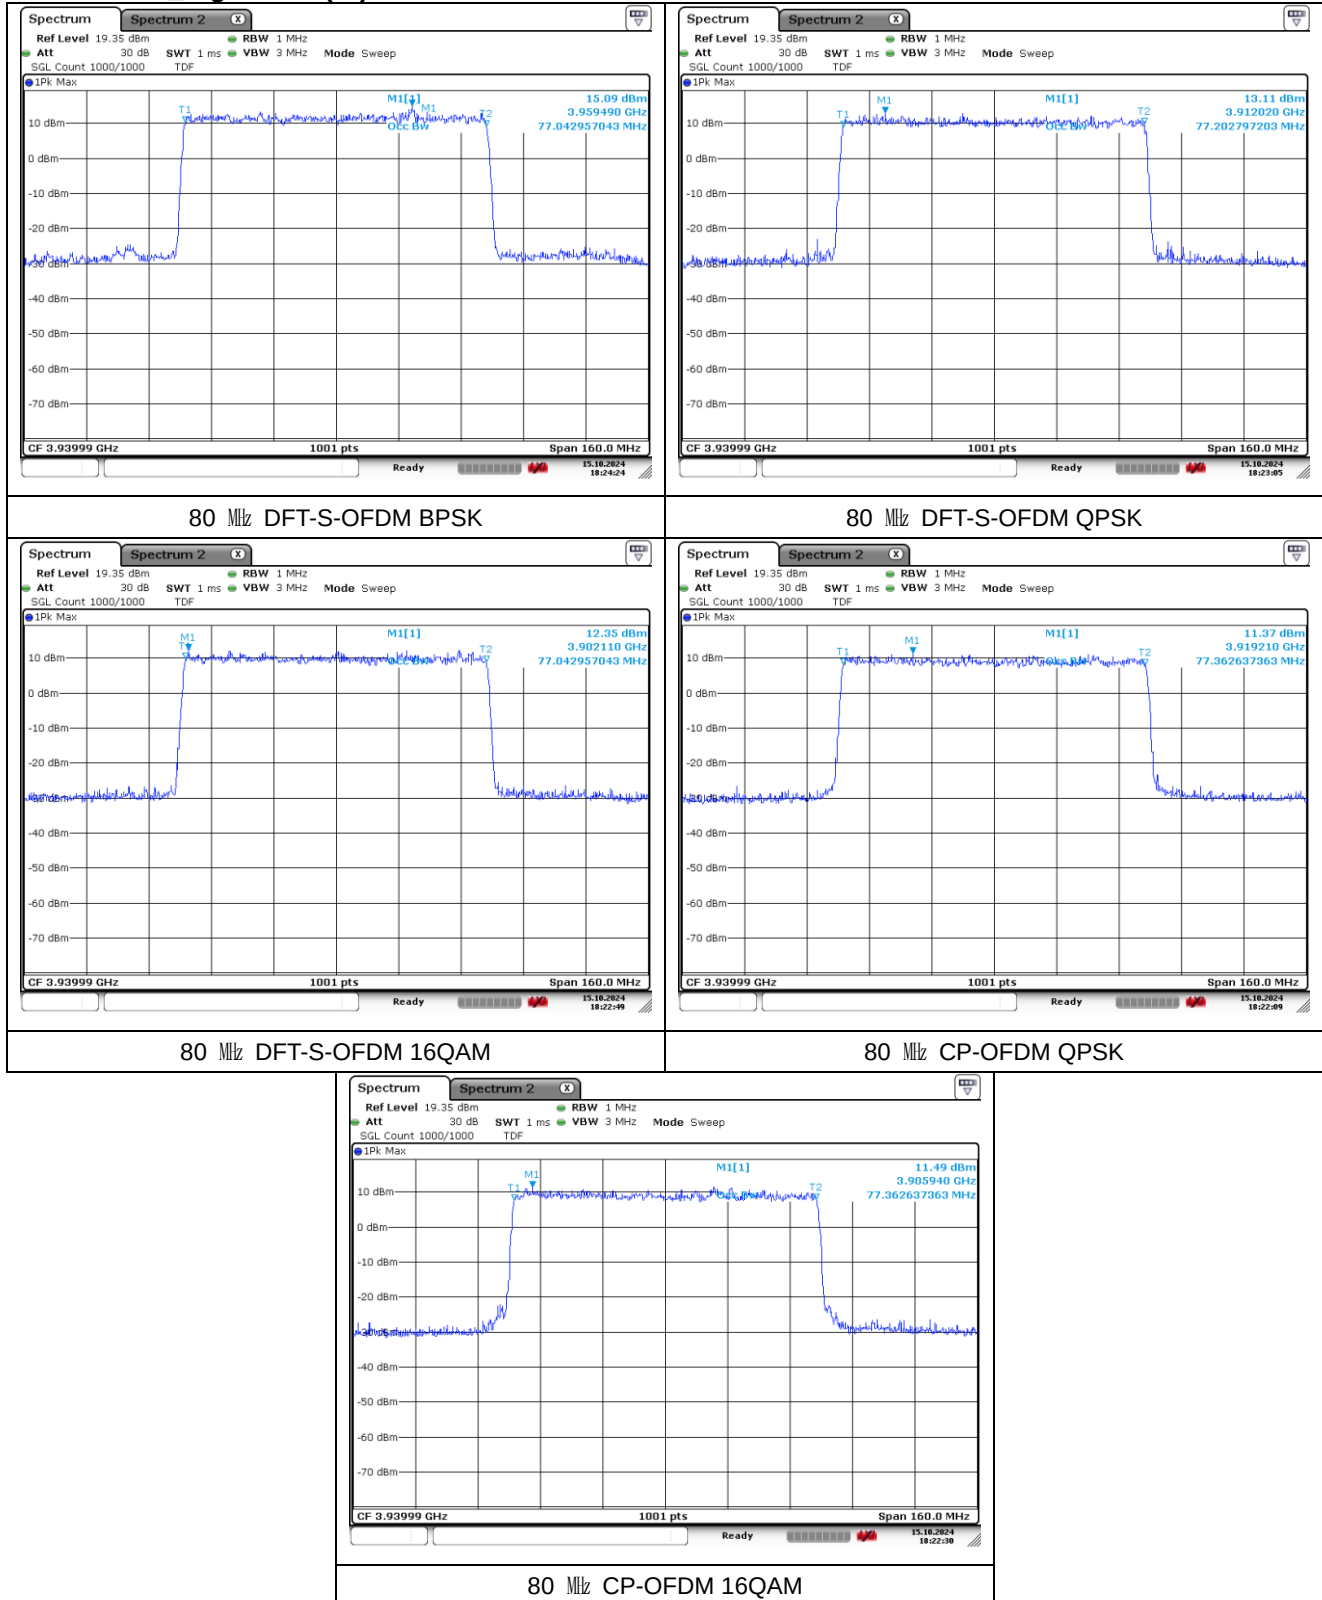

5. Peak-Average Ratio

5.1. Limit

FCC

- §27.50(j)(4), Equipment employed must be authorized in accordance with the provisions of § 27.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (j)(5) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

- §27.50(k)(4), Equipment employed must be authorized in accordance with the provisions of § 27.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (k)(5) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

IC

- RSS-192 Issue 5

5.5, the peak to average power ratio (PAPR) of the equipment shall not exceed 13 dB for more than 0.1% of the time, using a signal that corresponds to the highest PAPR during periods of continuous transmission

- RSS-198 Issue 1

5.5, the peak to average power ratio (PAPR) of the equipment shall not exceed 13 dB for more than 0.1% of the time, using a signal that corresponds to the highest PAPR during periods of continuous transmission.

- RSS-199 Issue 4


5.5, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

5.2. Test Procedure

The test follows section 5.2.3.4 of ANSI C63.26-2015.

See instrumentation-specific application literature for further guidance regarding use of the CCDF capability. The following guidelines are offered for performing a CCDF measurement.

- a. Set resolution/measurement bandwidth $\geq$ OBW or specified reference bandwidth.
- b. Set the number of counts to a value that stabilizes the measured CCDF curve.
- c. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- d. Record the maximum PAPR level associated with a probability of 0.1 %.
- e. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

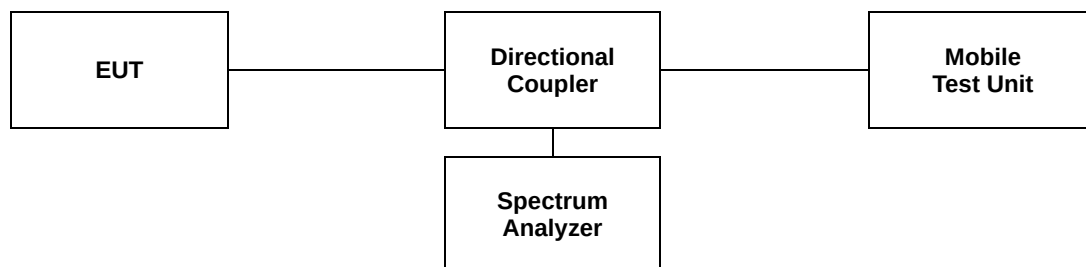

5.3 Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

Ant. 2

Band	SCS (kHz)	BW (MHz)	Frequency (MHz)	PAR (dB)								
				DFT-S-OFDM					CP-OFDM			
				BPSK	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
48 (IC)	30	20	3 560.01	4.04	4.54	5.48	5.94	6.58	6.64	6.64	7.20	8.68
			3 624.99	3.88	4.54	5.50	5.96	6.44	6.60	6.64	7.16	8.68
			3 690.00	4.00	4.50	5.52	5.88	6.62	6.62	6.64	7.20	8.82
		30	3 565.02	4.00	4.52	5.40	6.00	6.64	6.58	6.72	7.16	8.64
			3 624.99	3.94	4.50	5.46	5.94	6.66	6.56	6.68	7.18	8.44
			3 684.99	3.90	4.50	5.36	6.00	6.74	6.56	6.74	7.14	8.72
		40	3 570.00	4.04	4.50	5.48	5.98	6.62	6.56	6.74	7.12	8.26
			3 624.99	3.86	4.50	5.46	5.98	6.78	6.58	6.72	7.12	8.42
			3 679.98	3.98	4.50	5.48	5.94	6.74	6.60	6.72	7.16	8.44

Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					DFT-S-OFDM	CP-OFDM
n77/78 Low Band (FCC)	30	20	64QAM	3 460.02	6.36	8.32
				3 500.01	6.34	8.66
				3 540.00	6.38	8.64
		30	64QAM	3 465.00	6.60	8.58
				3 500.01	6.68	8.64
				3 534.99	6.60	8.56
		40	64QAM	3 470.01	6.76	8.54
				3 500.01	6.70	8.40
				3 529.98	6.80	8.42
		50	64QAM	3 475.02	6.60	8.54
				3 500.01	6.58	8.56
				3 525.00	6.56	8.50
		60	64QAM	3 480.00	6.54	8.36
				3 500.01	6.58	8.44
				3 519.99	6.62	8.42
		70	64QAM	3 485.01	6.52	8.60
				3 500.01	6.52	8.46
				3 514.98	6.48	8.54
		80	64QAM	3 490.02	6.46	8.42
				3 500.01	6.48	8.36
				3 510.00	6.48	8.34
		90	64QAM	3 495.00	6.54	8.50
				3 500.01	6.48	8.40
				3 504.99	6.54	8.42
		100	64QAM	3 500.01	6.46	8.40
n77/78 High Band (FCC)	30	20	64QAM	3 710.01	6.44	8.74
				3 840.00	6.34	8.46
				3 969.99	6.18	8.58
		30	64QAM	3 715.02	6.80	8.68
				3 840.00	6.76	8.54
				3 964.98	6.40	8.20
		40	64QAM	3 720.00	6.80	8.66
				3 840.00	6.88	8.78
				3 960.00	6.76	8.72
		50	64QAM	3 725.01	6.78	8.76
				3 840.00	6.62	8.68
				3 954.99	6.70	8.84
		60	64QAM	3 730.02	6.72	8.38
				3 840.00	6.64	8.48
				3 949.98	6.68	8.40
		70	64QAM	3 735.00	6.68	8.68
				3 840.00	6.70	8.72
				3 945.00	6.54	8.66
		80	64QAM	3 740.01	6.68	8.42
				3 840.00	6.58	8.58
				3 939.99	6.64	8.56
		90	64QAM	3 745.02	6.72	8.64
				3 840.00	6.72	8.56
				3 934.98	6.62	8.62
		100	64QAM	3 750.00	6.68	8.70
				3 840.00	6.72	8.58
				3 930.00	6.64	8.34

Band	SCS (kHz)	BW (MHz)	Frequency (MHz)	PAR (dB)								
				DFT-S-OFDM					CP-OFDM			
				BPSK	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
77/78 Low-Band IC	30	20	3 460.02	3.94	4.52	5.50	5.94	6.40	6.60	6.64	7.12	8.60
			3 675.00	3.86	4.60	5.58	5.94	6.52	6.62	6.66	7.28	8.70
			3 889.98	4.02	4.64	5.58	6.00	6.38	6.62	6.64	7.22	8.58
		30	3 465.00	3.88	4.48	5.40	5.98	6.66	6.58	6.68	7.24	8.58
			3 675.00	4.00	4.56	5.46	6.06	6.60	6.66	6.72	7.22	8.72
			3 885.00	3.96	4.50	5.46	6.04	6.78	6.66	6.74	7.22	8.58
		40	3 470.01	3.96	4.50	5.46	6.02	6.72	6.62	6.72	7.20	8.50
			3 675.00	3.90	4.50	5.50	5.94	7.02	6.54	6.84	7.24	8.70
			3 879.99	3.96	4.50	5.48	6.04	6.74	6.62	6.78	7.16	8.56
		50	3 475.02	4.20	4.64	5.54	6.10	6.64	6.74	6.68	7.22	8.64
			3 675.00	4.10	4.68	5.64	6.06	6.48	6.66	6.66	7.28	8.48
			3 874.98	4.04	4.60	5.56	6.04	6.50	6.70	6.74	7.30	8.50
		60	3 480.00	4.16	4.60	5.74	6.00	6.52	6.74	6.86	7.32	8.26
			3 675.00	4.14	4.60	5.62	5.92	6.58	6.72	6.82	7.32	8.30
			3 870.00	3.92	4.60	5.64	6.10	6.54	6.80	6.80	7.34	8.24
		70	3 485.01	4.12	4.60	5.68	6.02	6.50	6.84	6.84	7.32	8.44
			3 675.00	4.12	4.60	5.66	5.94	6.44	6.78	6.82	7.34	8.68
			3 864.99	4.02	4.60	5.74	6.04	6.44	6.86	6.88	7.34	8.36
		80	3 490.02	4.16	4.76	5.68	6.24	6.48	6.88	6.94	7.28	8.38
			3 675.00	4.22	4.76	5.66	6.18	6.24	6.82	6.84	7.26	8.36
			3 859.98	4.30	4.72	5.70	6.28	6.40	6.94	6.92	7.34	8.32
		90	3 495.00	4.02	4.60	5.56	6.00	6.52	6.82	6.80	7.28	8.46
			3 675.00	4.10	4.60	5.58	6.04	6.56	6.84	6.64	7.14	8.54
			3 855.00	3.96	4.66	5.58	6.08	6.52	6.84	6.86	7.40	8.32
		100	3 500.01	3.98	4.14	4.48	5.28	6.54	6.80	6.80	7.24	8.48
			3 675.00	4.26	4.08	4.28	4.76	6.28	6.78	6.74	7.40	8.60
			3 849.99	4.34	4.92	5.92	6.42	6.54	7.02	7.00	7.52	8.36

Band	SCS (kHz)	BW (MHz)	Frequency (MHz)	PAR (dB)								
				DFT-S-OFDM					CP-OFDM			
				BPSK	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
77 High-Band IC	30	20	3 910.02	3.90	4.52	5.52	6.00	6.40	6.60	6.66	7.20	8.74
			3 939.99	3.98	4.52	5.50	5.96	6.46	6.66	6.66	7.20	8.58
			3 969.99	3.88	4.52	5.50	5.92	6.20	6.66	6.64	7.22	8.92
		30	3 915.00	3.96	4.56	5.48	6.04	6.76	6.68	6.82	7.28	8.68
			3 939.99	4.02	4.58	5.50	6.08	6.78	6.72	6.86	7.24	8.48
			3 964.98	4.04	4.56	5.52	6.04	6.12	6.68	6.76	7.26	8.16
		40	3 920.01	3.94	4.54	5.56	5.96	6.74	6.72	6.86	7.28	8.52
			3 939.99	4.00	4.62	5.54	6.08	6.84	6.70	6.84	7.22	8.54
			3 960.00	3.86	4.48	5.52	6.00	6.60	6.68	6.82	7.26	8.58
		50	3 925.02	4.12	4.66	5.62	6.06	6.50	6.74	6.76	7.34	8.52
			3 939.99	4.00	4.64	5.58	6.06	6.48	6.74	6.74	7.32	8.44
			3 954.99	3.98	4.56	5.48	6.02	6.82	6.66	6.62	7.22	8.68
		60	3 930.00	3.84	4.66	5.62	6.06	6.50	6.72	6.76	7.32	8.20
			3 939.99	3.86	4.62	5.60	6.06	6.52	6.74	6.74	7.28	8.24
			3 949.98	3.80	4.60	5.56	6.02	6.54	6.72	6.70	7.28	8.18
		70	3 935.01	4.26	4.80	5.86	6.22	6.42	6.96	6.98	7.52	8.40
			3 939.99	4.20	4.66	5.74	6.10	6.42	6.86	6.90	7.36	8.38
			3 945.00	4.06	4.60	5.72	6.06	6.44	6.86	6.90	7.38	8.38
		80	3 939.99	4.42	4.92	5.86	6.32	6.40	7.08	7.08	7.46	8.16

Switching

Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					DFT-S-OFDM	CP-OFDM
41 (FCC)	730	20	256QAM	2 506.02	6.67	8.75
				2 592.99	6.58	8.78
				2 679.99	6.55	8.72
		30	256QAM	2 511.00	6.67	8.67
				2 592.99	6.70	8.64
				2 674.98	6.64	8.67
		40	256QAM	2 516.01	6.67	8.87
				2 592.99	6.64	8.72
				2 670.00	6.67	8.64
		50	256QAM	2 521.02	6.60	8.80
				2 592.99	6.64	8.80
				2 664.99	6.60	8.72
		60	256QAM	2 526.00	6.72	8.46
				2 592.99	6.62	8.46
				2 659.98	6.60	8.54
		70	256QAM	2 531.01	6.48	8.72
				2 592.99	6.56	8.54
				2 655.00	6.58	8.68
		80	256QAM	2 536.02	6.68	8.32
				2 592.99	6.52	8.44
				2 649.99	6.62	8.42
		90	256QAM	2 541.00	6.74	8.50
				2 592.99	8.52	6.54
				2 644.98	6.74	8.52
		100	256QAM	2 546.01	6.70	8.50
				2 592.99	6.62	8.66
				2 640.00	6.74	8.52
Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					DFT-S-OFDM	CP-OFDM
41 (IC)	30	20	256QAM	2 510.01	6.61	8.81
				2 595.00	6.52	8.75
				2 679.99	6.55	8.75
		30	256QAM	2 515.02	6.72	8.67
				2 595.00	6.67	8.81
				2 674.98	6.70	8.75
		40	256QAM	2 520.00	6.64	8.81
				2 595.00	6.70	8.64
				2 670.00	6.67	8.61
		50	256QAM	2 525.01	6.64	8.74
				2 595.00	6.62	8.78
				2 664.99	6.64	8.68
		60	256QAM	2 530.02	6.82	8.40
				2 595.00	6.60	8.44
				2 659.98	6.60	8.38
		70	256QAM	2 535.00	6.54	8.58
				2 595.00	6.56	8.66
				2 655.00	6.58	8.60
		80	256QAM	2 540.01	6.72	8.44
				2 595.00	6.56	8.52
				2 649.99	6.58	8.44
		90	256QAM	2 545.02	6.78	8.54
				2 595.00	6.50	8.52
				2 644.98	6.70	8.50
		100	256QAM	2 550.00	6.78	8.64
				2 595.00	6.70	8.60
				2 640.00	6.74	8.64

Band	SCS (kHz)	BW (MHz)	Frequency (MHz)	PAR (dB)								
				DFT-S-OFDM					CP-OFDM			
				BPSK	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
48 (IC)	30	20	3 560.01	3.98	4.64	5.66	6.04	6.66	6.60	6.68	7.22	8.64
			3 624.99	4.08	4.70	5.58	6.04	6.62	6.68	6.76	7.30	8.82
			3 690.00	4.16	4.66	5.60	6.00	6.56	6.68	6.70	7.40	8.66
		30	3 565.02	3.94	4.54	5.50	6.08	6.60	6.72	6.80	7.32	8.66
			3 624.99	4.00	4.60	5.46	6.10	6.74	6.74	6.80	7.22	8.64
			3 684.99	3.98	4.60	5.50	6.08	6.70	6.68	6.78	7.28	8.58
		40	3 570.00	3.80	4.48	5.52	5.98	6.72	6.66	6.84	7.12	8.66
			3 624.99	4.08	4.56	5.58	6.02	6.84	6.72	6.82	7.18	8.50
			3 679.98	4.02	4.56	5.52	6.00	6.86	6.70	6.84	7.26	8.78

Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					DFT-S-OFDM	CP-OFDM
n77/78 Low Band (FCC)	30	20	256QAM	3 460.02	6.62	8.74
				3 500.01	6.64	8.68
				3 540.00	6.68	8.90
		30	256QAM	3 465.00	6.78	8.60
				3 500.01	6.78	8.70
				3 534.99	6.64	8.80
		40	256QAM	3 470.01	6.90	8.40
				3 500.01	6.76	8.76
				3 529.98	6.96	8.48
		50	256QAM	3 475.02	6.82	8.98
				3 500.01	6.86	8.86
				3 525.00	6.82	8.92
		60	256QAM	3 480.00	6.90	8.66
				3 500.01	6.88	8.58
				3 519.99	6.84	8.60
		70	256QAM	3 485.01	6.70	8.74
				3 500.01	6.84	8.72
				3 514.98	6.80	8.74
		80	256QAM	3 490.02	6.68	8.64
				3 500.01	6.80	8.54
				3 510.00	6.68	8.68
		90	256QAM	3 495.00	6.84	8.80
				3 500.01	6.86	8.58
				3 504.99	6.78	8.70
		100	256QAM	3 500.01	6.82	8.76
n77/78 High Band (FCC)	30	20	256QAM	3 710.01	7.00	8.56
				3 840.00	6.92	8.72
				3 969.99	6.94	8.82
		30	256QAM	3 715.02	6.96	8.94
				3 840.00	7.12	8.62
				3 964.98	6.82	8.86
		40	256QAM	3 720.00	6.98	8.74
				3 840.00	6.84	8.90
				3 960.00	6.86	8.64
		50	256QAM	3 725.01	7.12	8.96
				3 840.00	7.08	8.76
				3 954.99	7.12	8.80
		60	256QAM	3 730.02	7.06	8.76
				3 840.00	6.90	8.74
				3 949.98	6.86	8.76
		70	256QAM	3 735.00	7.08	8.96
				3 840.00	7.02	8.66
				3 945.00	6.84	8.72
		80	256QAM	3 740.01	6.98	8.92
				3 840.00	7.00	8.88
				3 939.99	6.90	8.84
		90	256QAM	3 745.02	6.50	8.94
				3 840.00	7.14	8.78
				3 934.98	6.78	8.74
		100	256QAM	3 750.00	7.08	8.92
				3 840.00	7.00	8.86
				3 930.00	7.02	8.72

Band	SCS (kHz)	BW (MHz)	Frequency (MHz)	PAR (dB)								
				DFT-S-OFDM					CP-OFDM			
				BPSK	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
77/78 Low-Band IC	30	20	3 460.02	4.42	5.16	6.32	6.62	6.98	7.08	7.08	7.34	9.08
			3 675.00	4.48	5.10	6.10	6.50	7.04	6.94	6.94	7.24	8.94
			3 889.98	4.32	5.08	6.02	6.44	7.00	6.92	6.94	7.34	8.82
		30	3 465.00	4.36	5.00	6.10	6.74	7.20	7.00	7.30	7.68	9.16
			3 675.00	4.24	4.92	5.98	6.46	7.14	6.90	6.96	7.42	8.90
			3 885.00	4.14	4.82	5.82	6.42	6.90	6.94	7.14	7.28	8.74
		40	3 470.01	4.42	4.98	6.08	6.58	7.10	7.02	7.22	7.60	9.04
			3 675.00	4.20	4.90	5.96	6.42	6.96	6.90	6.90	7.36	8.82
			3 879.99	4.08	4.82	5.88	6.38	6.98	6.86	7.06	7.44	8.78
		50	3 475.02	4.50	5.02	6.18	6.66	7.24	7.10	7.06	7.58	8.92
			3 675.00	4.40	5.00	6.04	6.54	7.12	6.92	7.02	7.40	8.96
			3 874.98	4.32	4.92	5.92	6.42	6.92	6.70	6.80	7.46	8.76
		60	3 480.00	4.56	4.98	6.12	6.64	7.04	6.82	7.20	7.30	9.12
			3 675.00	4.36	5.08	6.14	6.48	7.16	6.92	7.06	7.62	8.98
			3 870.00	4.24	4.90	5.98	6.40	6.96	6.82	7.00	7.40	8.80
		70	3 485.01	4.34	5.02	5.96	6.50	7.06	7.16	7.12	7.74	8.78
			3 675.00	4.30	5.04	6.04	6.48	7.14	7.00	7.32	7.38	9.08
			3 864.99	4.22	4.94	5.88	6.32	6.92	7.02	7.10	7.70	8.94
		80	3 490.02	4.42	5.00	6.04	6.42	7.04	6.92	6.72	7.72	9.14
			3 675.00	4.38	5.04	6.08	6.46	7.06	6.84	7.00	7.56	8.88
			3 859.98	4.38	4.96	5.96	6.44	6.96	6.78	6.92	7.20	8.72
		90	3 495.00	4.36	4.96	6.10	6.44	7.18	7.12	7.02	7.30	9.16
			3 675.00	4.34	5.04	6.06	6.46	7.14	6.98	7.02	7.20	9.22
			3 855.00	4.20	4.98	5.96	6.32	6.88	6.90	6.72	7.22	8.86
		100	3 500.01	4.38	5.06	6.06	6.52	7.28	7.24	7.06	7.50	9.12
			3 675.00	4.30	5.06	6.10	6.44	7.06	6.88	7.08	7.56	9.06
			3 849.99	4.60	4.66	5.82	6.26	6.62	6.90	6.98	7.32	8.92

Band	SCS (kHz)	BW (MHz)	Frequency (MHz)	PAR (dB)								
				DFT-S-OFDM					CP-OFDM			
				BPSK	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
77 High-Band IC	30	20	3 910.02	4.32	5.08	6.10	6.50	6.80	6.90	6.90	7.26	8.80
			3 939.99	4.34	5.10	6.06	6.46	6.98	6.88	6.92	7.20	8.74
			3 969.99	4.38	5.02	6.04	6.44	6.90	6.88	6.94	7.32	8.98
		30	3 915.00	4.14	4.84	5.86	6.44	6.94	6.90	7.06	7.36	8.70
			3 939.99	4.12	4.88	5.86	6.40	6.92	6.86	6.90	7.42	8.80
			3 964.98	4.14	4.78	5.80	6.42	6.94	6.92	7.00	7.52	8.60
		40	3 920.01	4.12	4.84	5.84	6.26	6.94	6.88	7.00	7.44	8.74
			3 939.99	4.18	4.88	5.86	6.38	7.06	6.82	6.88	7.38	8.66
			3 960.00	4.22	4.76	5.82	6.28	6.74	6.86	7.00	7.46	8.68
		50	3 925.02	4.30	4.92	5.96	6.32	7.08	6.82	6.76	7.48	8.88
			3 939.99	4.38	4.92	5.82	6.42	6.90	6.82	6.84	7.40	8.82
			3 954.99	4.42	4.92	5.98	6.42	7.02	6.96	6.94	7.46	8.84
		60	3 930.00	4.34	5.02	5.94	6.34	6.94	6.96	6.86	7.20	8.82
			3 939.99	4.42	4.98	5.96	6.34	6.92	6.90	6.86	7.48	8.62
			3 949.98	4.46	5.00	6.00	6.40	6.92	6.78	6.98	7.44	8.84
		70	3 935.01	4.38	5.04	5.98	6.52	7.02	6.94	7.10	7.66	8.78
			3 939.99	4.42	4.98	5.94	6.54	6.94	7.00	7.02	7.52	8.78
			3 945.00	4.40	5.02	5.96	6.46	6.98	6.84	7.20	7.58	8.92
		80	3 939.99	4.56	5.04	5.92	6.56	7.02	6.96	6.92	7.56	8.68


- Test plots

Ant. 2


NR band 48 (IC)




NR band 48 (IC)

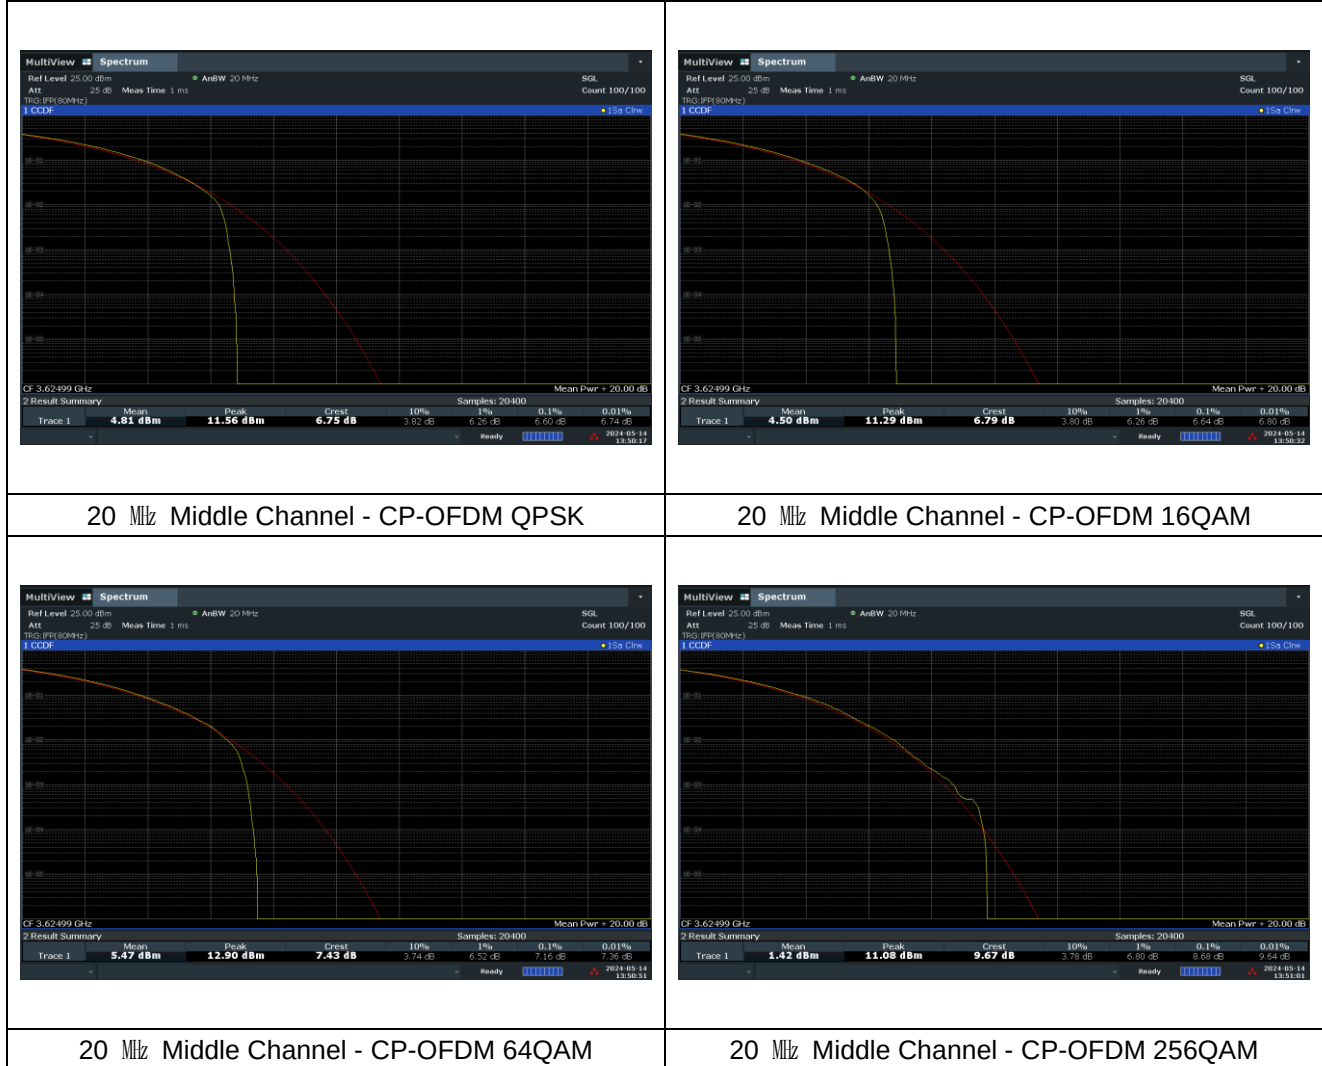

NR band 48 (IC)

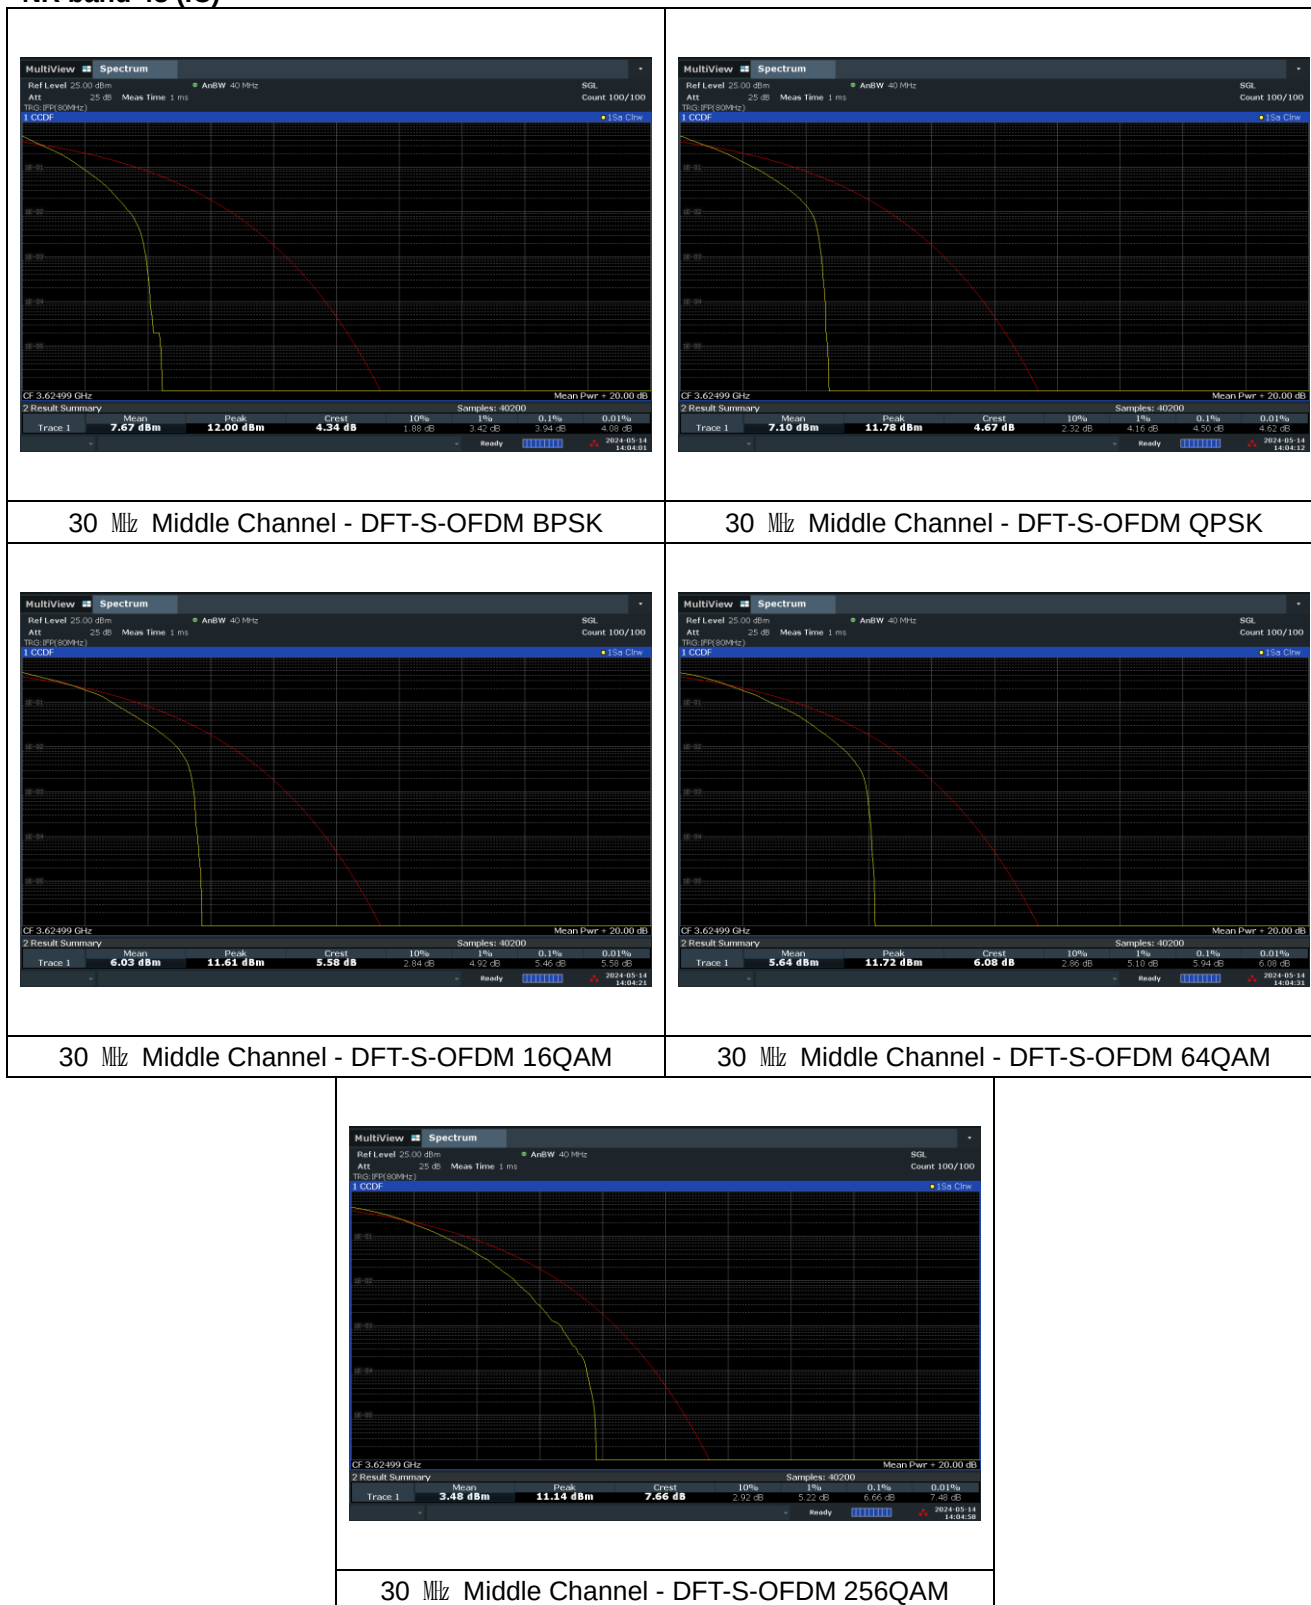

NR band 48 (IC)

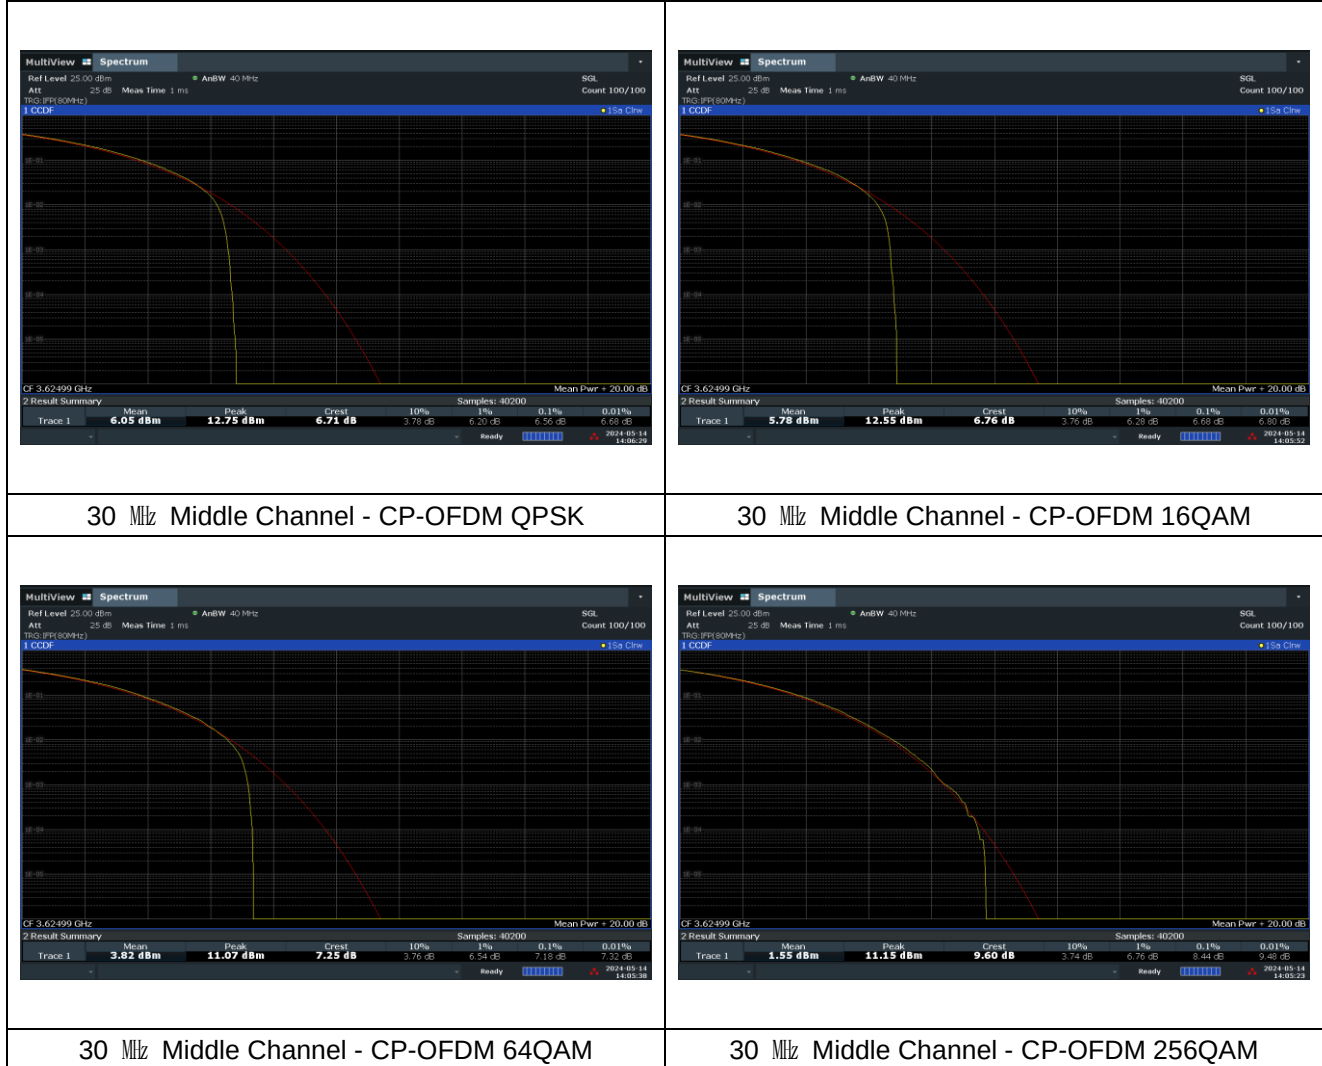

NR band 48 (IC)



40 MHz Middle Channel - DFT-S-OFDM BPSK



40 MHz Middle Channel - DFT-S-OFDM QPSK



40 MHz Middle Channel - DFT-S-OFDM 16QAM




40 MHz Middle Channel - DFT-S-OFDM 64QAM




40 MHz Middle Channel - DFT-S-OFDM 256QAM


NR band 48 (IC)

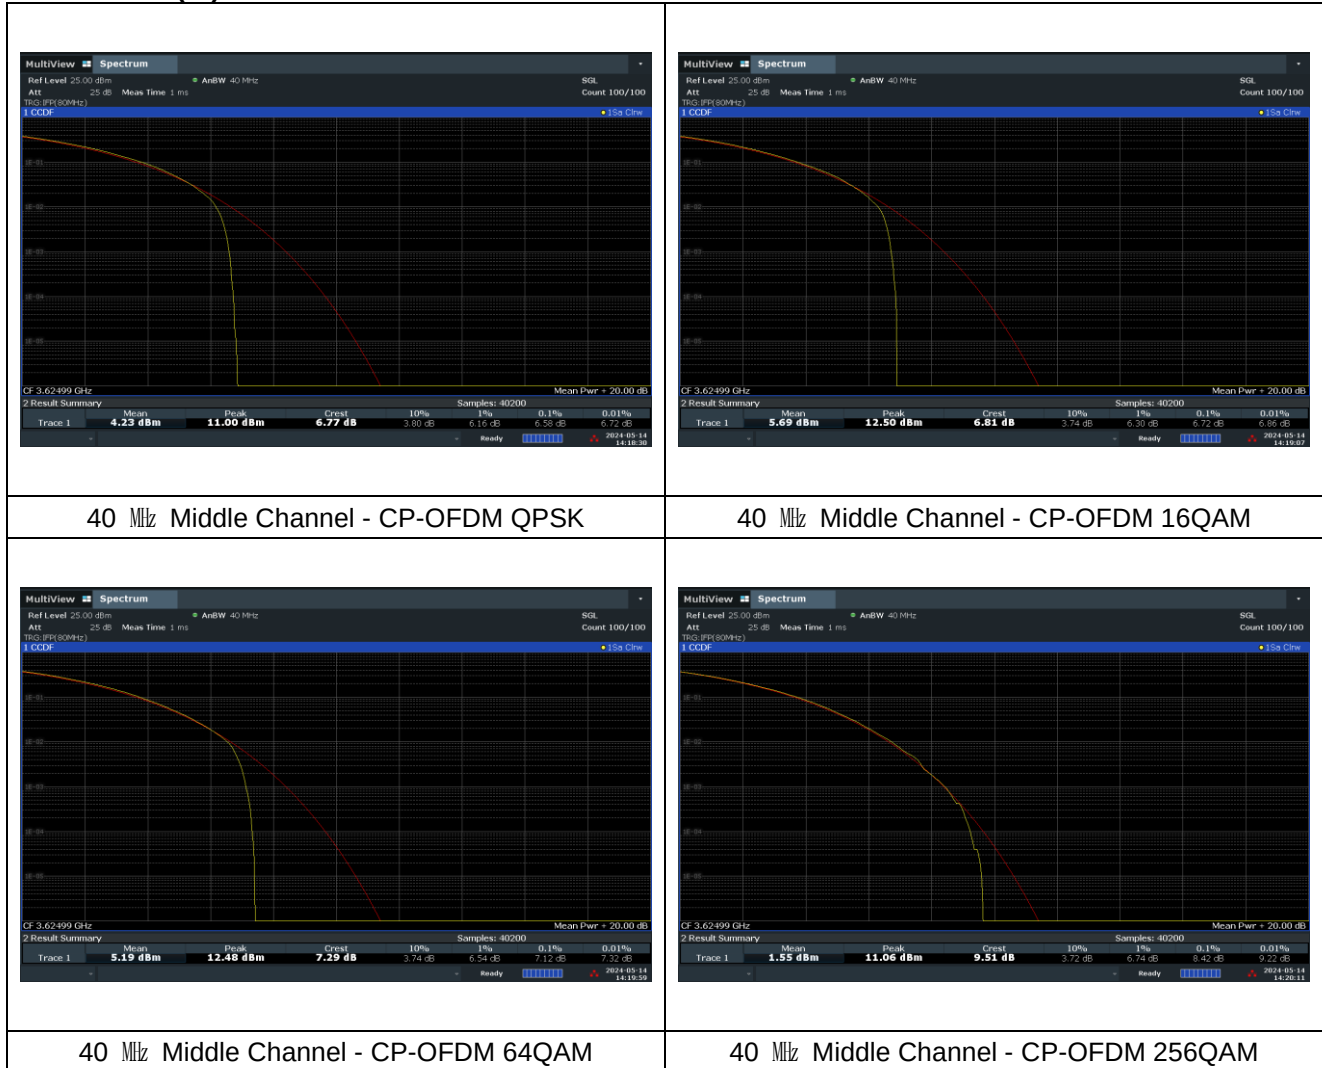

NR band 77/78_Low Band (FCC)

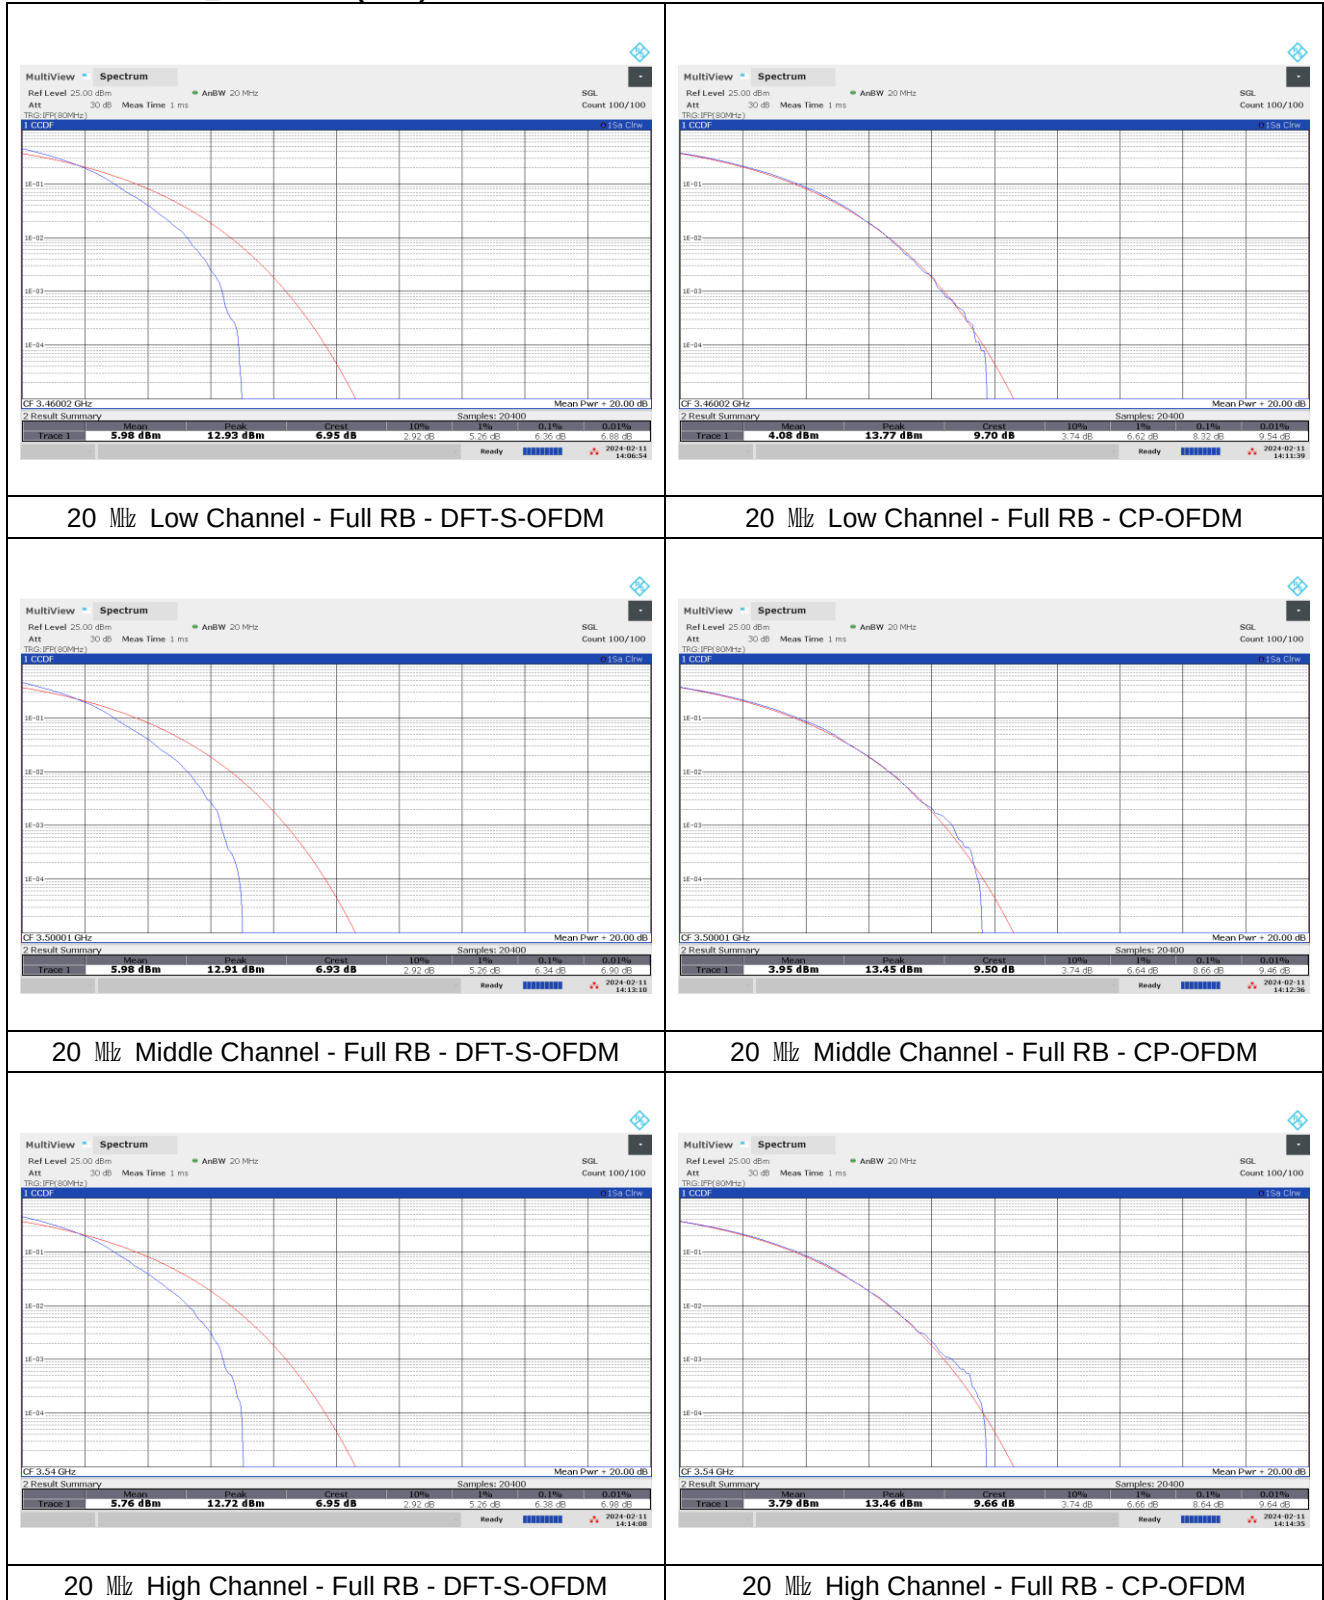

NR band 77/78 Low Band (FCC)

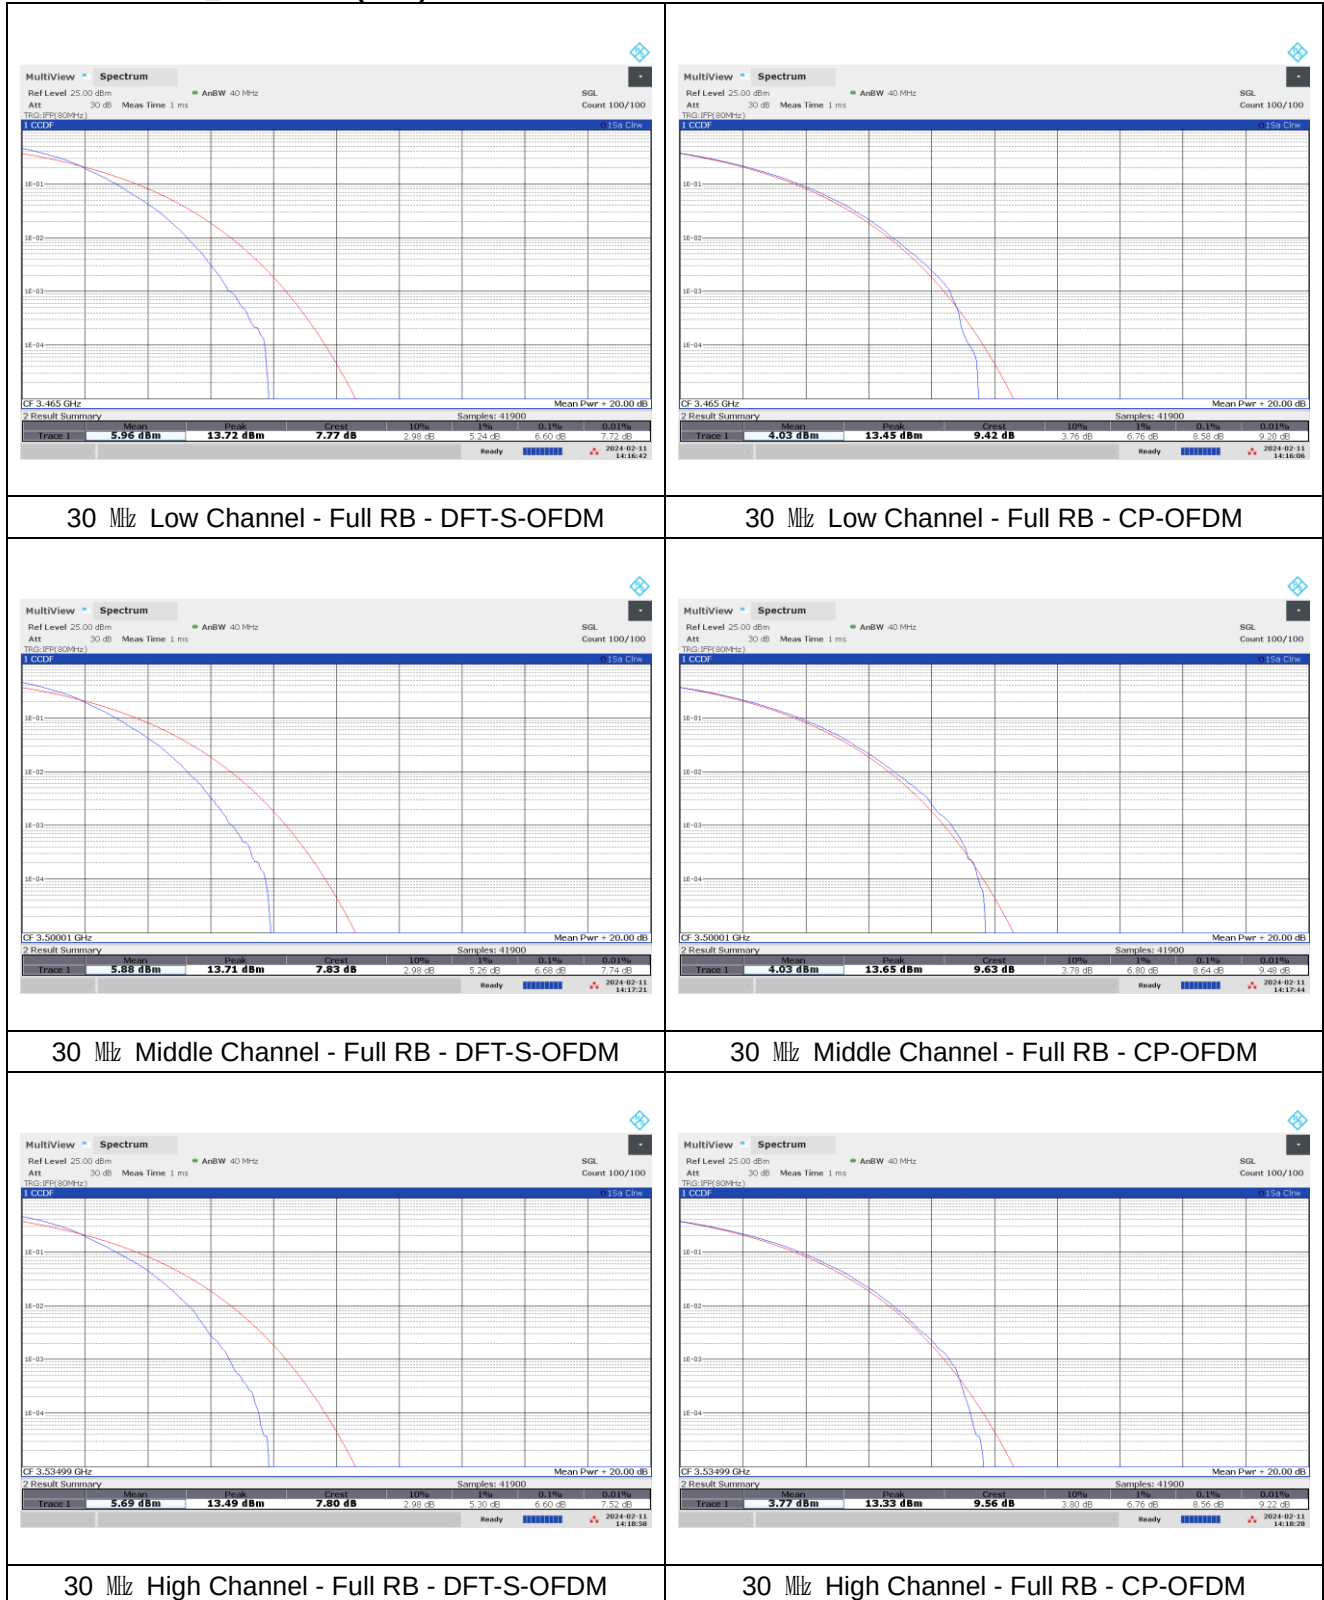

NR band 77/78_Low Band (FCC)

