

hp 10:24:00 Apr 26, 2000

GOLDSTAR Model: MV-174DC Class II Mkr1 24.06 GHz
Ref -10 dBm Atten 35 dB Ext PG 33 dB -63.86 dBm

Peak
Log
10
dB/

V1 S2
S3 FC
AA

Start 10 GHz
*Res BW 1 MHz

*VBW 3 MHz

Stop 25 GHz
Sweep 150 ms

Freq/Channel

Center Freq
17.5000000 GHz


Start Freq
10.0000000 GHz

Stop Freq
25.0000000 GHz

CF Step
1.5000000 GHz
Auto Man

Freq Offset
0.0000000 Hz

Signal Track
On Off

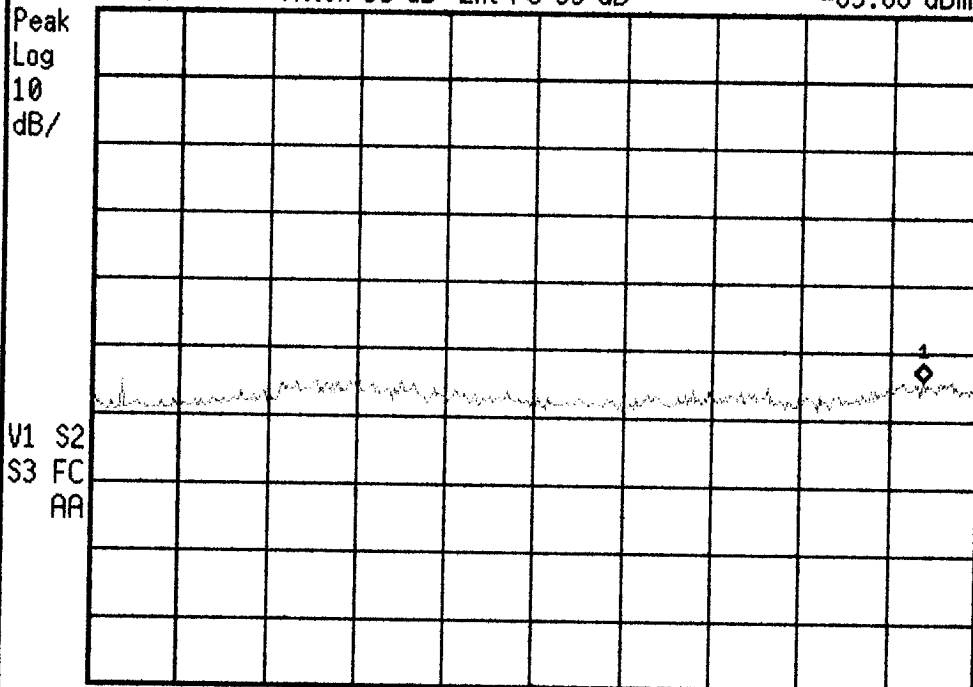

hp

GOLDSTAR Model# MV-174DC

Radiated

MKR 2.448 GHz

REF -30.0 dBm

ATTEN 10 dB

-60.20 dBm


10 dB/

POS PK

OFFSET

-30.0

dB

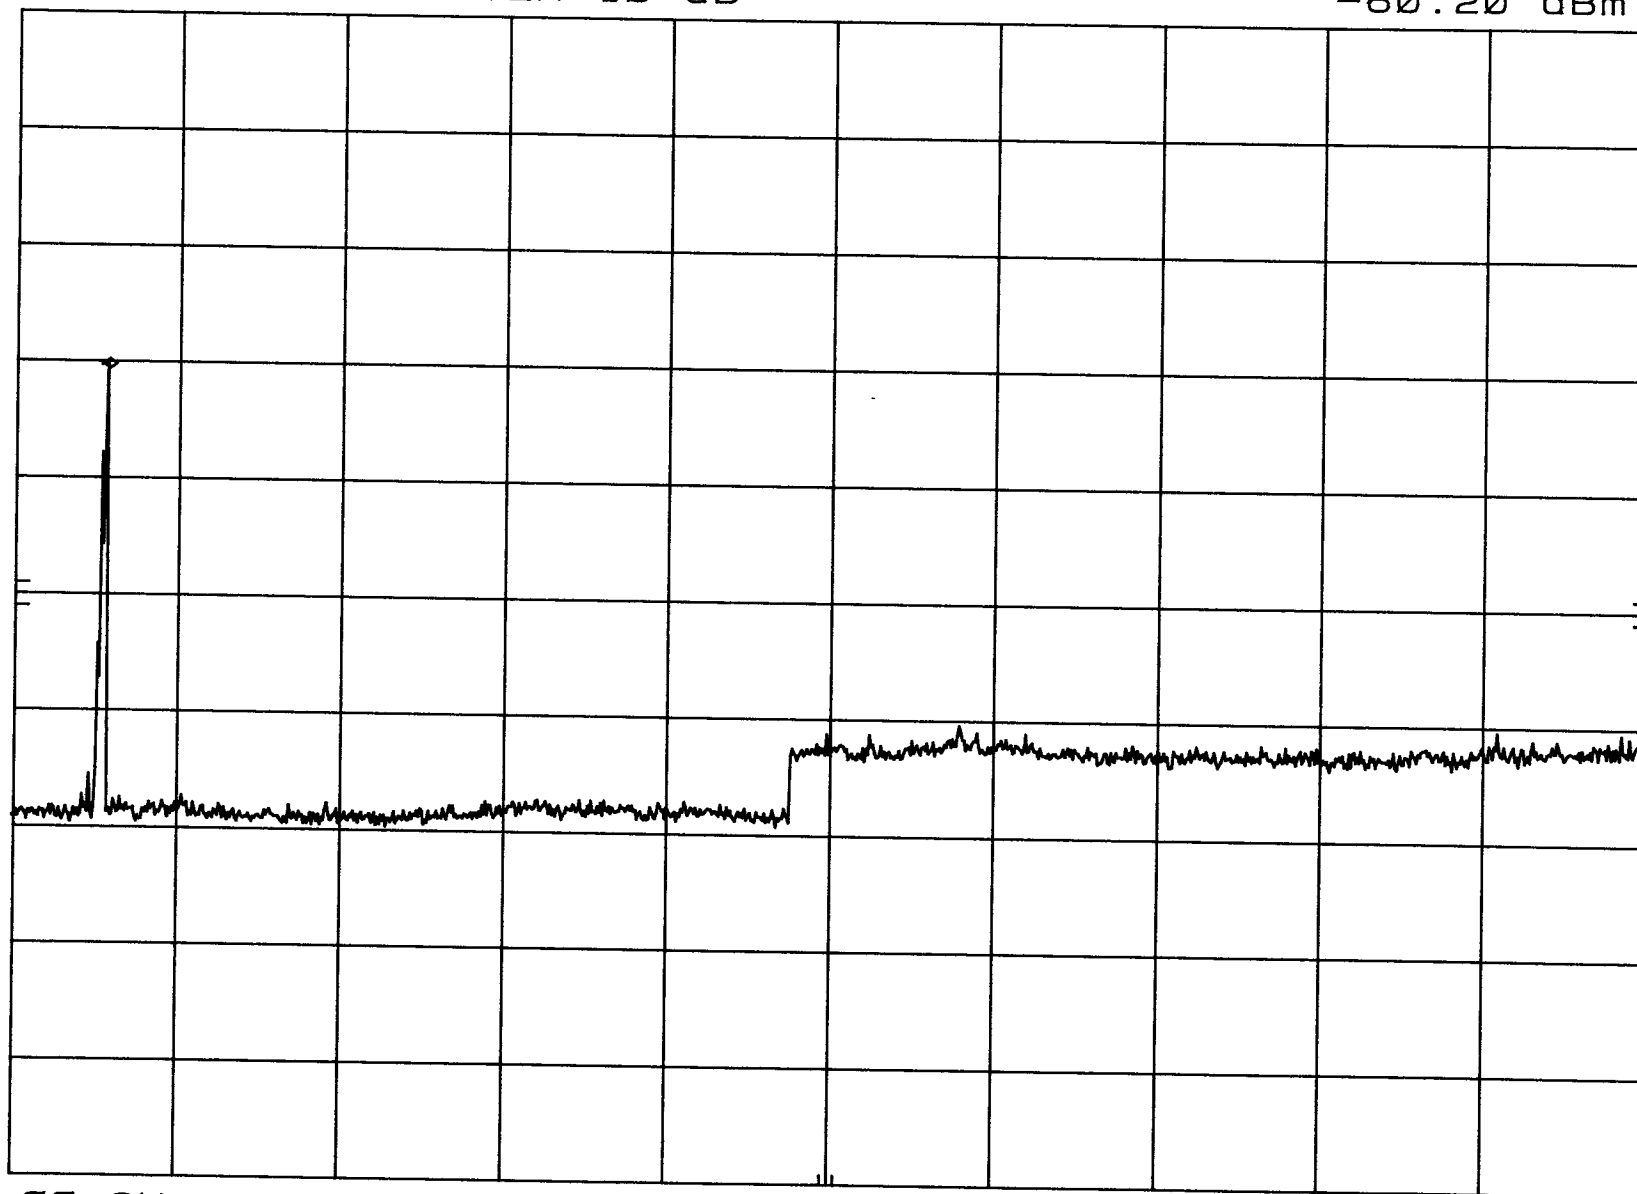

START 2.00 GHz

RES BW 1 MHz

VBW 3 MHz


STOP 10.00 GHz

SWP 3.84 sec

GOLDSTAR Model# MV-174DC Radiated
REF -30.0 dBm ATTEN 10 dB

MKR 2.464 GHz
-62.30 dBm

hp
10 dB/
POS PK
OFFSET
-30.0
dB

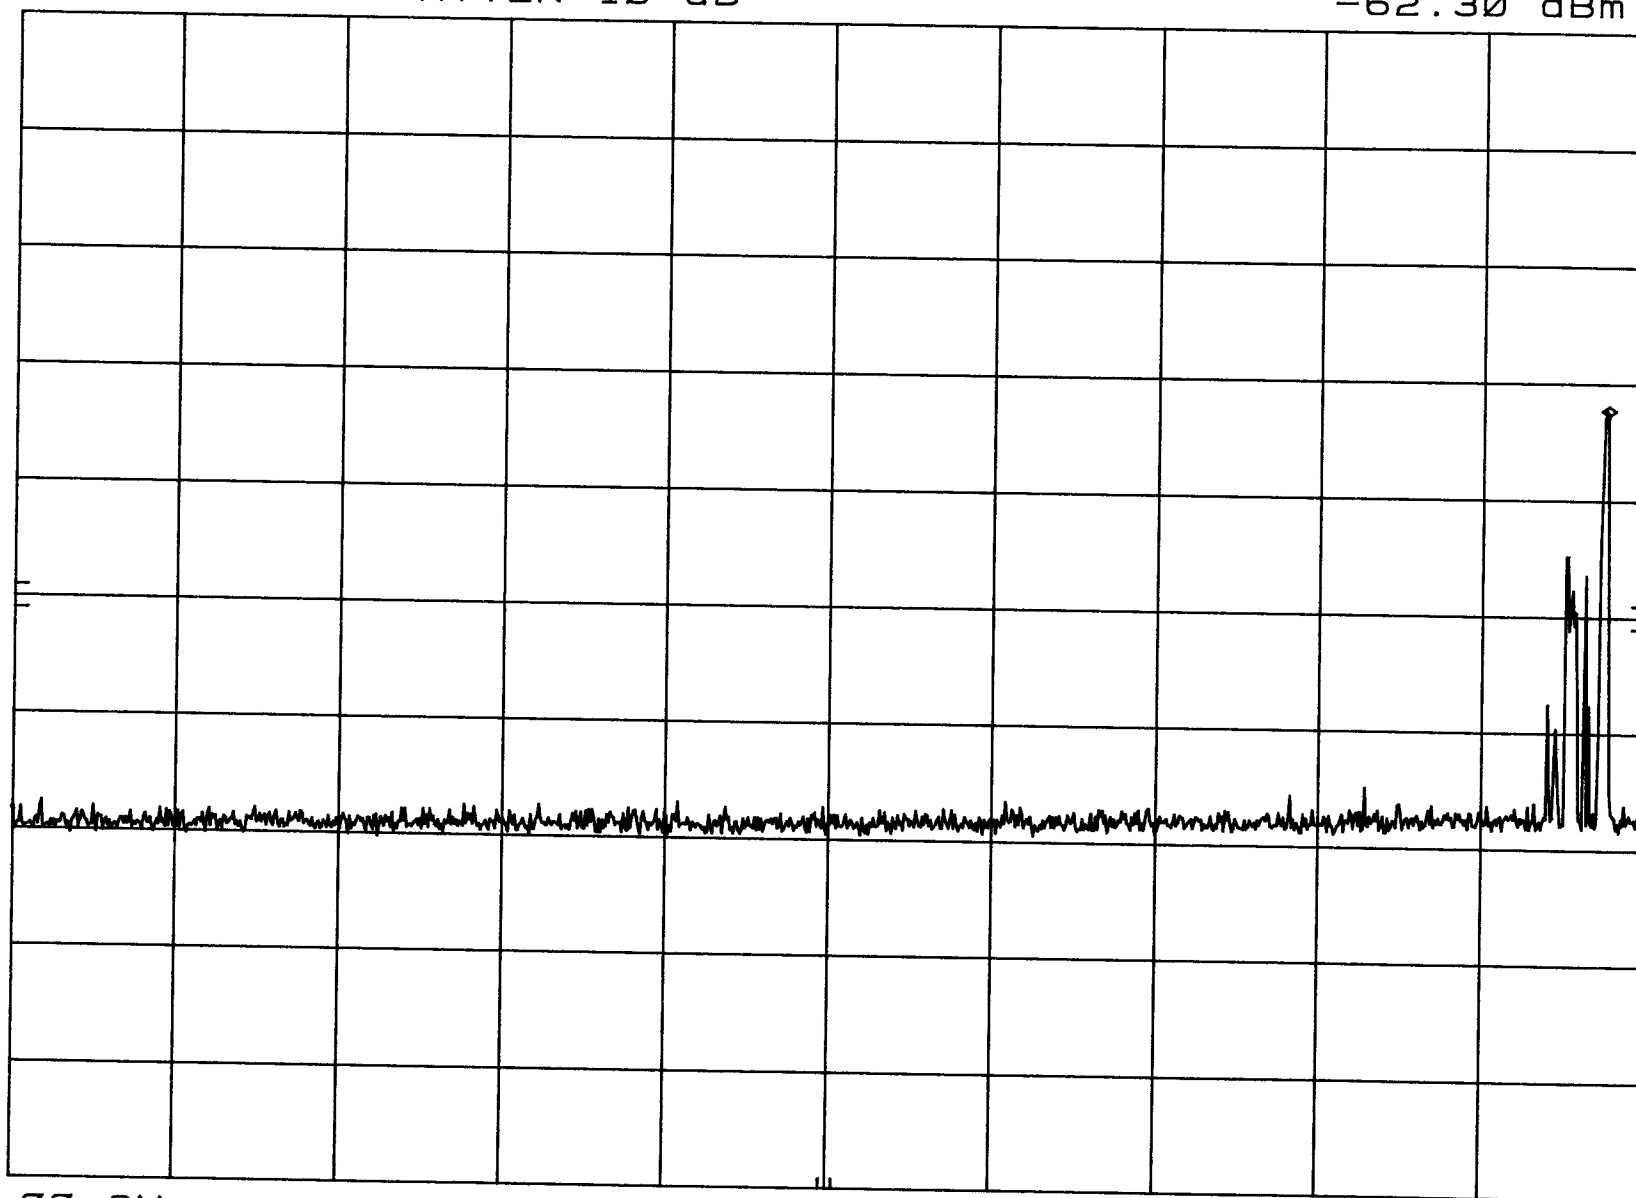

START 1.00 GHz

RES BW 1 MHz

VBW 3 MHz

STOP 2.50 GHz
SWP 37.5 msec


GOLDSTAR Model# MV-174DC Voltage Variation MKR 2.468 8 GHz
REF -30.0 dBm ATTEN 10 dB -60.20 dBm

hp

10 dB/

POS PK

OFFSET
-30.0
dB

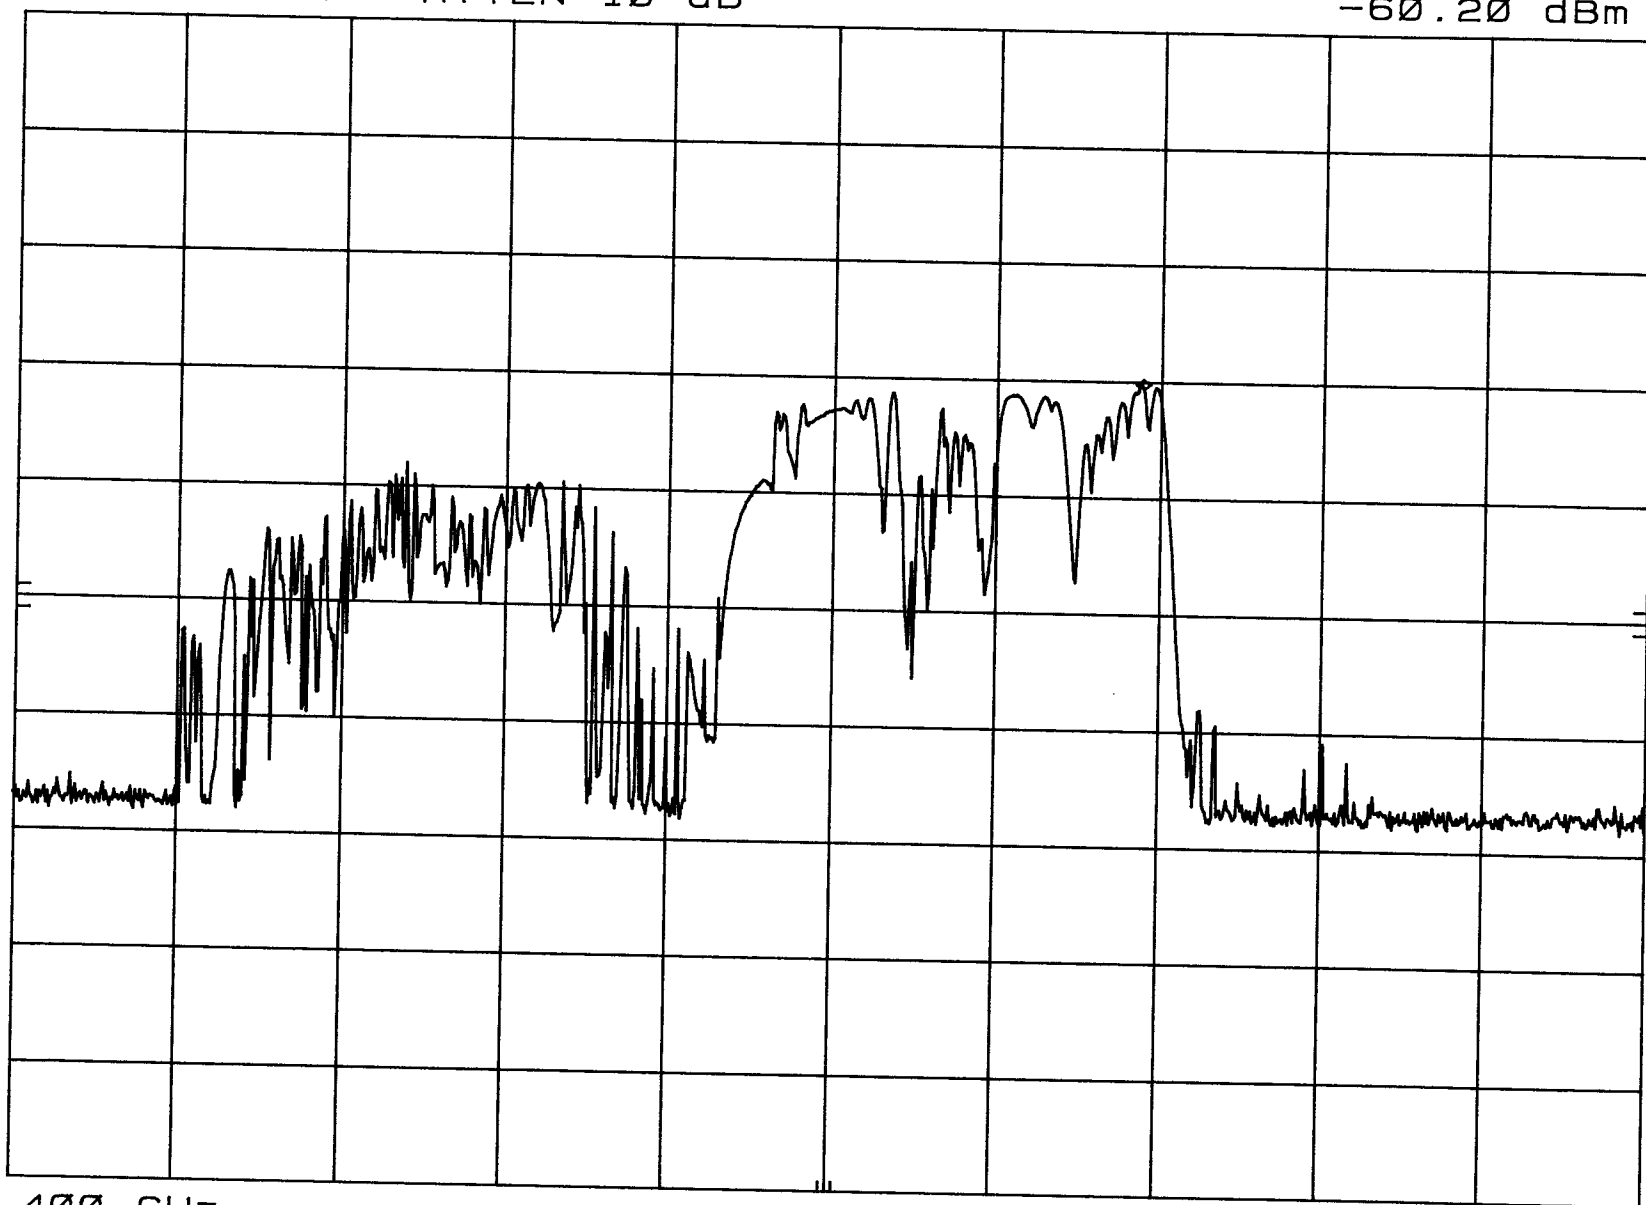

START 2.400 GHz

RES BW 1 MHz


VBW 3 MHz

STOP 2.500 GHz
SWP 20.0 msec

GOLDSTAR Model# MV-174DC Load Variation
REF -30.0 dBm ATTEN 10 dB

MKR 2.459 9 GHz
-65.30 dBm

hp
10 dB/
POS PK
OFFSET
-30.0
dB

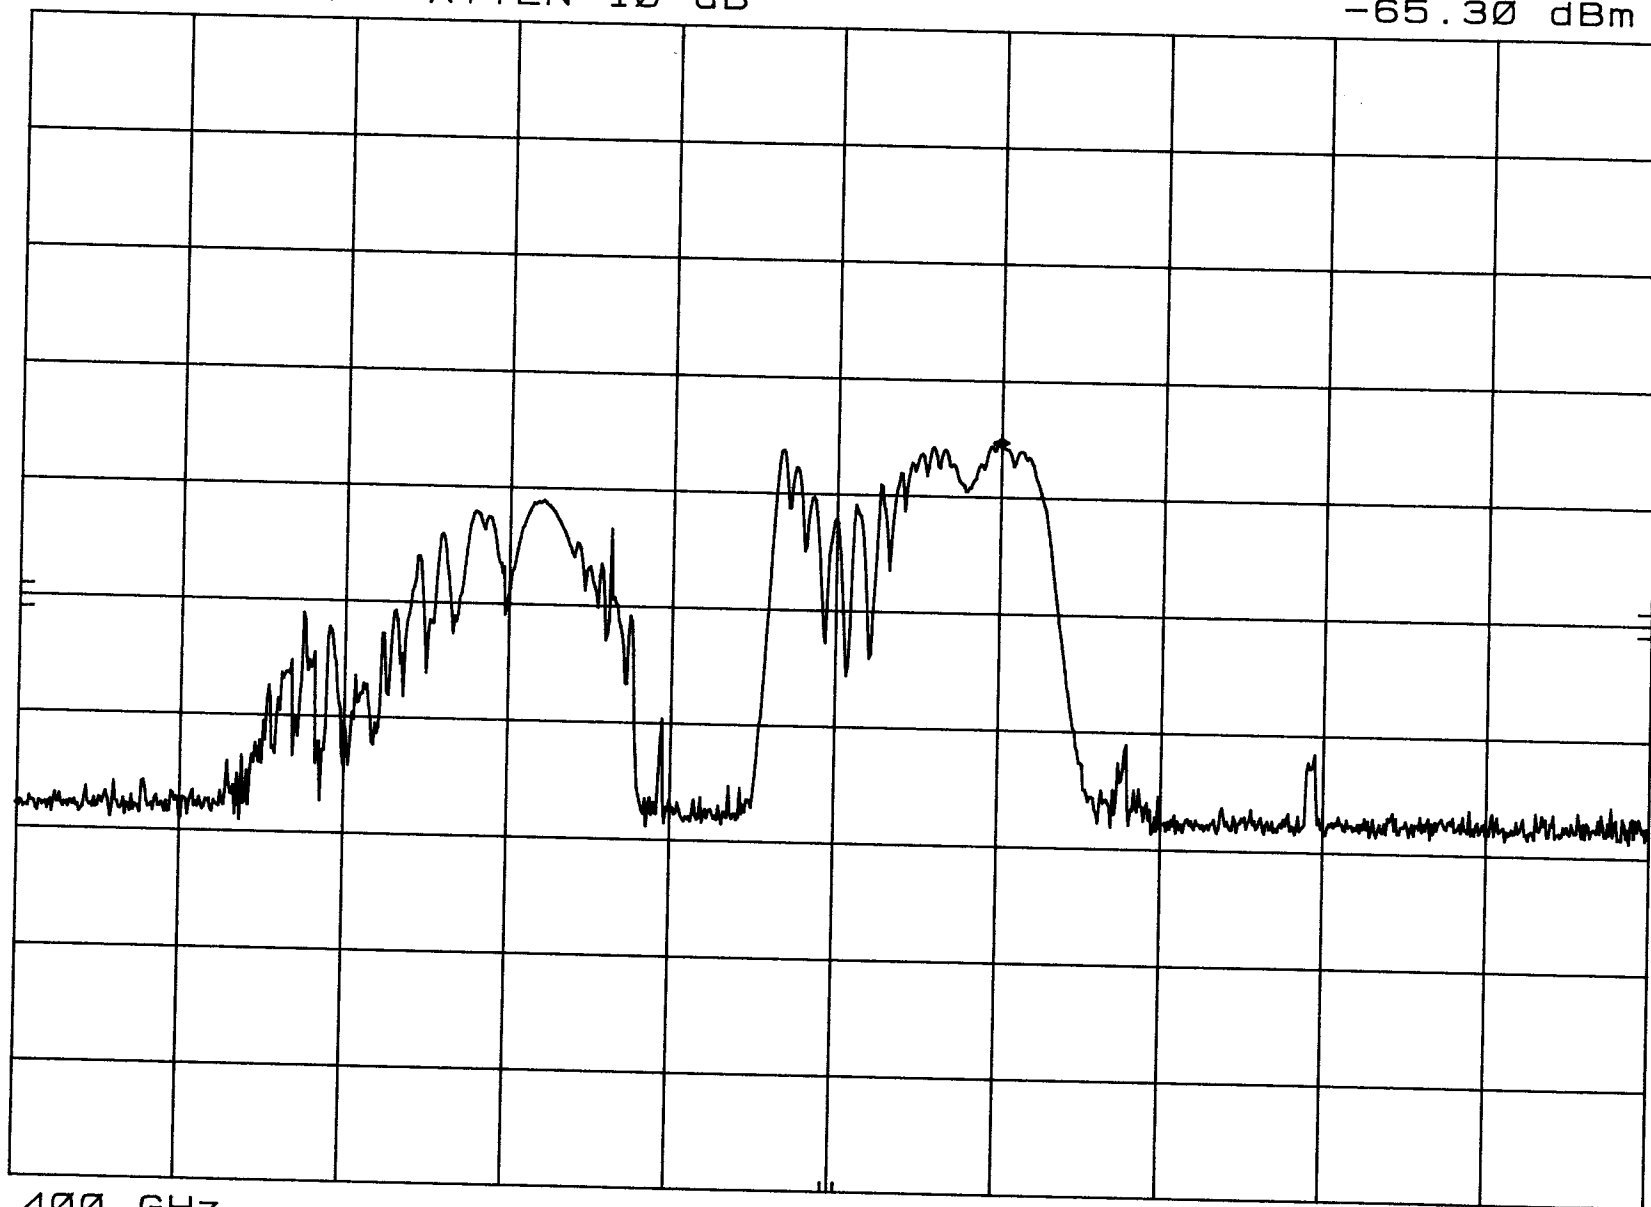

START 2.400 GHz

RES BW 1 MHz

VBW 3 MHz

STOP 2.500 GHz
SWP 20.0 msec