



HCT CO., LTD.

CERTIFICATION DIVISION
105-1, JANGAM-RI, MAJANG-MYEON, ICHEON-SI, KYOUNGKI-DO, REPUBLIC OF KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401

EMI CERTIFICATION REPORT

Applicant:

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu, Seoul
153-023, Korea

Date of Issue: July 01, 2011

Test Report No.: HCTE1107FE06

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJVS700

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : Cellular/PCS CDMA/EvDO Phone with Bluetooth & WLAN
Trade Name : LG Electronics Inc
Model(s) : VS700, LG-VS700
Port / Connector(s) : USB Data Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by
: Jin Pyo Hong
Test Engineer of EMC Team

Approved by
: Sang Jun Lee
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details	4
1.4 Cable description	5
1.5 Noise suppression parts on cable. (I/O cable)	5
1.6 Test methodology	6
1.7 Test facility	6
1.8 Frequency Range of Radiated Measurements	6
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	7
3. PRELIMINARY TEST	
3.1 Conducted Emission test	8
3.2 Radiated Emission test	8
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	9
4.2 Radiated Emission test	14
5. FIELD STRENGTH CALCULATION	15
6. TEST EQUIPMENT	16
7. CONCLUSION	17

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test (E.U.T) is **Cellular/PCS CDMA/EvDO Phone with Bluetooth & WLAN, Model: VS700** manufactured by **LG Electronics Inc.** Its basic purpose is used for communications.

Model (s)	VS700
Additional Model	LG-VS700
FCC ID	BEJVS700
E.U.T Type	Cellular/PCS CDMA/EvDO Phone with Bluetooth & WLAN
TX Frequency	824.70 MHz to 848.31 MHz (CDMA 835) 1 851.25 MHz to 1 908.75 MHz (CDMA 1 900)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA 835) 1 931.25 MHz to 1 988.75 MHz (CDMA 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number	FCC ID / DoC	Connected To
Cellular/PCS CDMA/ EvDO Phone with Bluetooth & WLAN	LG	VS700	BEJVS700	Notebook PC
Notebook PC	LG	X140-02	DoC	E.U.T Notebook PC adaptor
Notebook PC adaptor	DELTA (JIANG SU)	ADP-40PH AD	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
Headset	-	-	-	E.U.T
USB cable	-	-	-	E.U.T Notebook PC
SD card (2 GB)	-	-	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
Cellular/PCS GSM/GPRS/EDGE/HSDPA Phone with Bluetooth and WLAN	Headset jack	-	N	(D)1.2
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/GPRS/EDGE/HSDPA Phone with Bluetooth and WLAN	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The 10 m semi anechoic chamber used to conduct the test is located at the 105-1, Jangam -Ri, Majang-Myeon, Icheon-Si, Kyoungki-Do, Republic of Korea. These measurement facilities are constructed in conformance with the requirements of ANSI C63.4. Detailed description of test facilities was submitted to the Commission and accepted dated Sep. 03, 2010 (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

- Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor.
Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.
- Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 10 m semi-anechoic chamber.

[Configuration of Tested System]

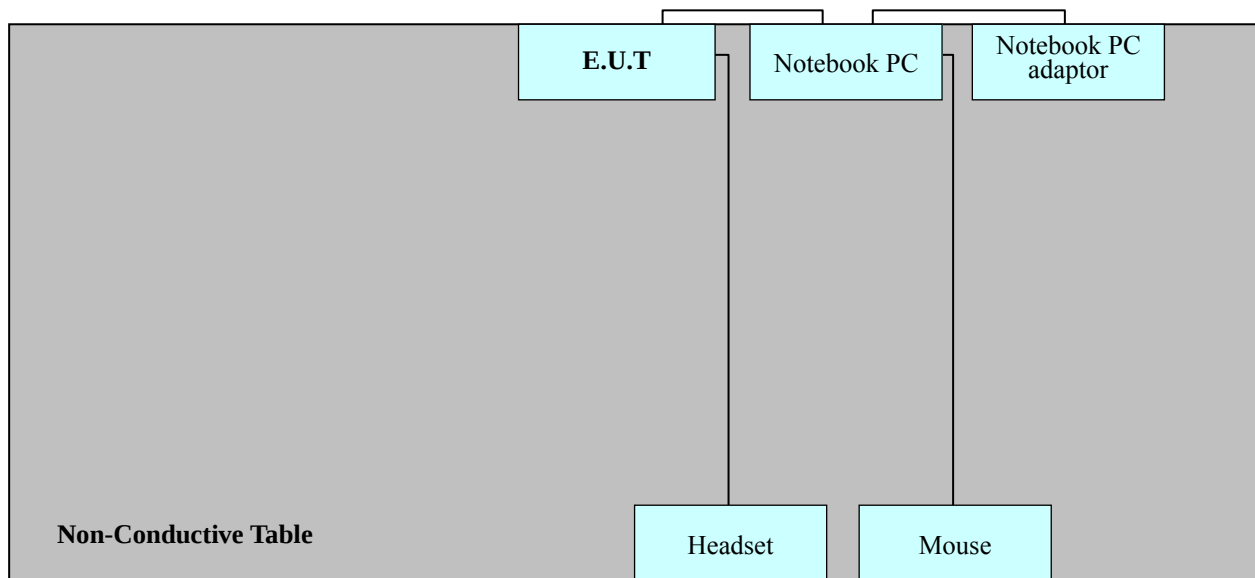

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data Communication mode
Temperature	: 24.1 °C
Humidity Level	: 51.7 %
Test Date	: July 01, 2011

※ **NOTE:** Refer to page 10 to page 13 for details.


HCT

EMC

EUT: VS700
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: FCC Part 15
Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

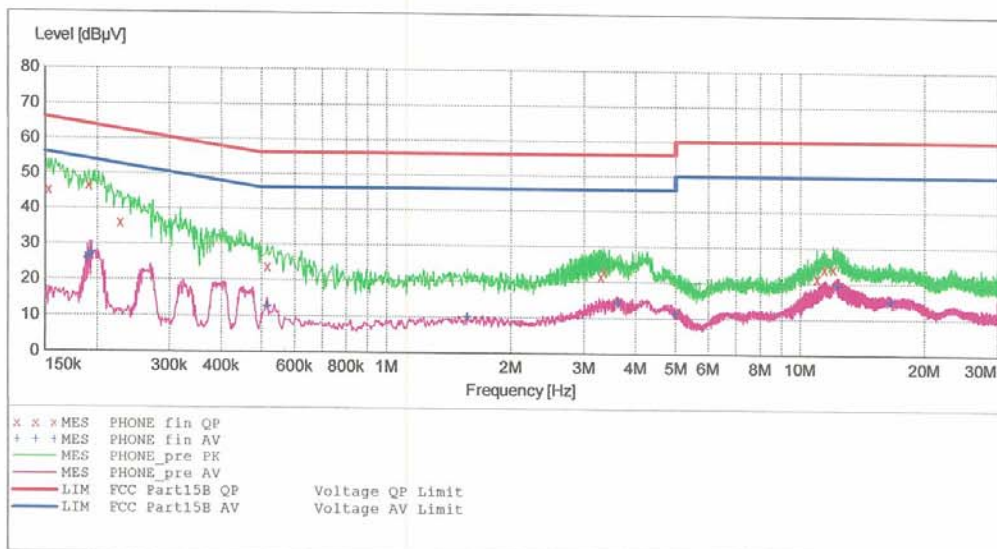

MEASUREMENT RESULT: "PHONE_fin QP"

7/1/2011 10:37AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.153010	45.10	10.1	66	20.7	---	---
0.191010	46.50	10.1	64	17.5	---	---
0.228010	36.00	10.1	63	26.5	---	---
0.516000	23.70	10.1	56	32.3	---	---
3.308000	21.50	10.3	56	34.5	---	---
3.360000	22.90	10.3	56	33.1	---	---
10.976000	21.40	11.0	60	38.6	---	---
11.448000	24.00	11.1	60	36.0	---	---
12.008000	24.20	11.1	60	35.8	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

7/1/2011 10:37AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.190010	25.70	10.1	54	28.3	---	---
0.192010	26.70	10.1	54	27.2	---	---
0.194010	27.20	10.1	54	26.6	---	---
0.516000	12.70	10.1	46	33.3	---	---
1.572000	10.00	10.2	46	36.0	---	---
3.628000	14.30	10.4	46	31.7	---	---
5.000000	11.30	10.5	46	34.7	---	---
12.292000	19.30	11.1	50	30.7	---	---
16.596000	15.00	11.6	50	35.0	---	---


HCT

EMC

EUT: VS700
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: FCC Part 15
Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

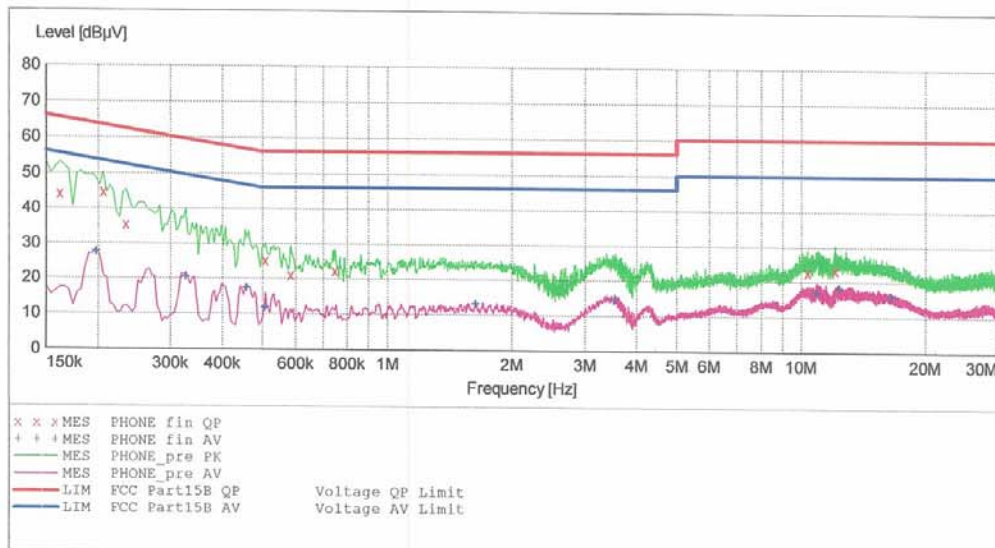

MEASUREMENT RESULT: "PHONE_fin QP"

7/1/2011 10:40AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.162010	44.00	10.3	65	21.3	---	---
0.206010	44.60	10.3	63	18.8	---	---
0.234010	35.40	10.3	62	26.9	---	---
0.508000	25.10	10.3	56	30.9	---	---
0.584000	21.20	10.3	56	34.8	---	---
0.748000	22.30	10.4	56	33.7	---	---
10.368000	22.60	11.1	60	37.4	---	---
12.072000	23.40	11.2	60	36.6	---	---
12.084000	23.50	11.2	60	36.5	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

7/1/2011 10:40AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.198010	27.50	10.3	54	26.2	---	---
0.326010	20.30	10.3	50	29.2	---	---
0.458010	17.30	10.3	47	29.4	---	---
0.508000	11.80	10.3	46	34.2	---	---
1.636000	13.10	10.4	46	32.9	---	---
3.552000	14.70	10.6	46	31.3	---	---
10.892000	16.90	11.1	50	33.1	---	---
12.364000	18.10	11.2	50	31.9	---	---
16.576000	15.70	11.5	50	34.3	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit Apply to : FCC PART 15 Subpart B Class B

-For measurement below 1 GHz

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

-For measurement above 1 GHz

Setting : Peak mode: Detector- Peak(RBW: 1 MHz / VBW: 1 MHz)

: Average mode: Detector- Peak (RBW: 1 MHz / VBW: 10 Hz)

Temperature : 25.1 °C

Humidity Level : 48.7 %

Test Date : July 01, 2011

Frequency (MHz)	Reading (dBuV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBuV/m)	Level (dBuV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
50.5	13.21	V	1.0	12.00	1.19	40.0	26.4	13.6
142.6	13.81	V	1.0	12.63	2.06	43.5	28.5	15.0
191.9	16.48	H	1.0	10.21	2.40	43.5	29.1	14.4
332.5	10.65	H	1.0	14.14	3.21	46.0	28.0	18.0
376.4	12.55	H	1.0	15.12	3.43	46.0	31.1	14.9
755.9	3.19	V	1.7	22.02	4.98	46.0	30.2	15.8

※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5th harmonic of highest fundamental frequency. The highest fundamental frequency is CDMA 1 900 center frequency.
2. For measurement above 1 GHz, Emission noise was not founded over the ambient noise.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Serial Number</u>	<u>Next CAL Date</u>
-------------	---------------------	---------------------	----------------------	----------------------

Conducted Emission

☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	2012.05.03
☒ LISN	Rohde & Schwarz	ESH3-Z5	100282	2012.02.01
☐ LISN	Rohde & Schwarz	ENV216	100073	2012.04.01
☒ Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	2011.10.25

Radiated Emission

☐ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	2011.10.29
☒ EMI Test Receiver	Rohde & Schwarz	ESU26	100241	2011.09.01
☒ Trilog Antenna	Schwarzbeck	VULB9160	3125	2013.05.03
☒ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	-
☒ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	-
☒ Communication Antenna	Schwarzbeck	USLP9142	9142-248	-
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	-	2012.04.13
☒ Power Amplifier	Rohde & Schwarz	SCU-18	10094	2011.09.29
☐ Base Station	Rohde & Schwarz	CMU 200	1100000802	2012.02.16

7. CONCLUSION

The data collected shows that the **Cellular/PCS CDMA/EvDO Phone with Bluetooth & WLAN, Model: VS700, FCC ID: BEJVS700** complies with §15.107 and §15.109 of the FCC rules.