

Test Laboratory: UL CCS SAR Lab D

300 System Performance Check 1900MHz Head

DUT: Dipole; Type: D1900V2; Serial: 5d140

Communication System: System Check Signal - CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.36, 7.36, 7.36); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.51 mW/g

d=10mm, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.2 V/m; Power Drift = 0.112 dB


Peak SAR (extrapolated) = 7.43 W/kg

SAR(1 g) = 3.98 mW/g; SAR(10 g) = 2.07 mW/g

Maximum value of SAR (measured) = 5.05 mW/g


d=10mm, Pin=100mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm

Maximum value of SAR (interpolated) = 6.26 mW/g

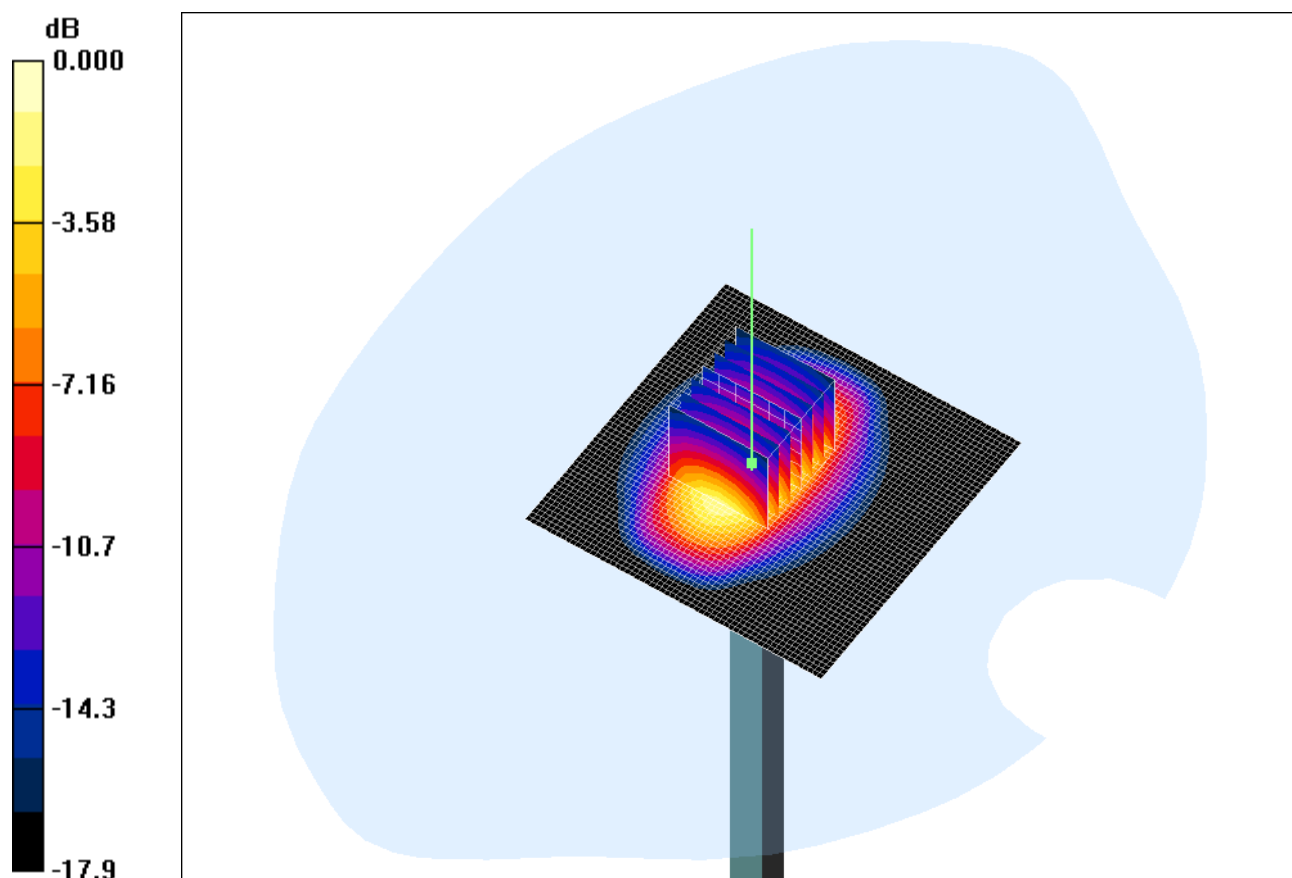

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

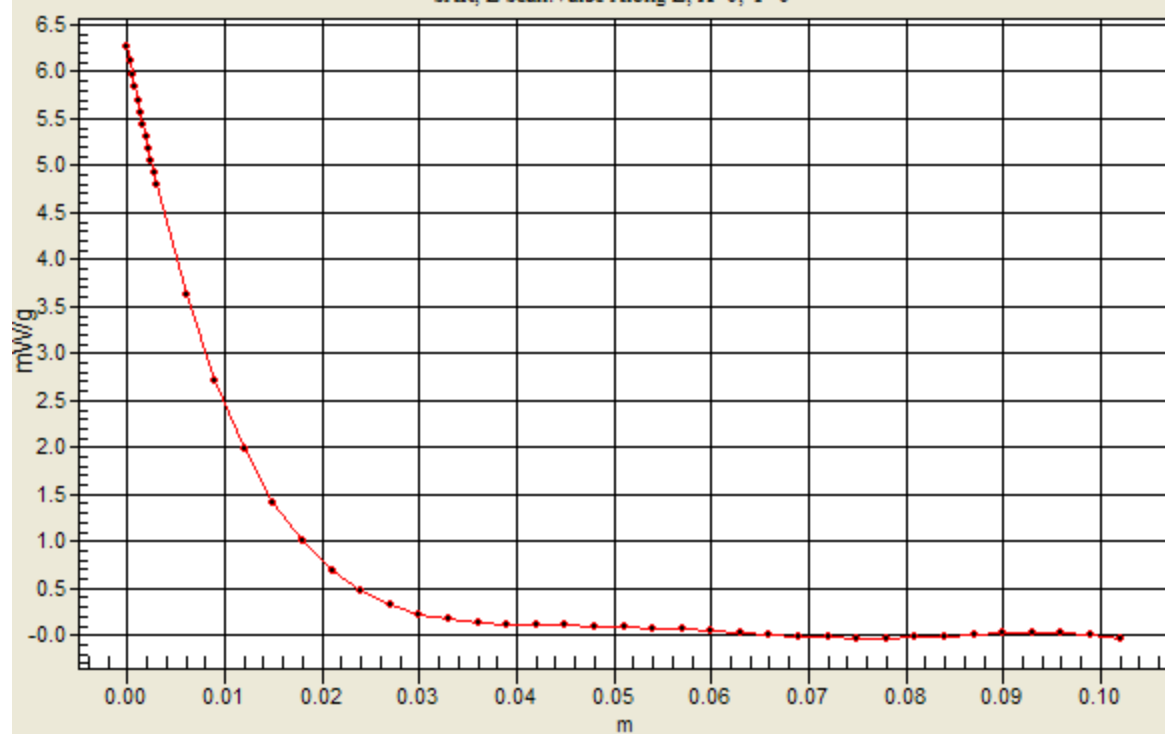

Test Laboratory: UL CCS SAR Lab D

301 System Performance Check 1900MHz Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d140

Communication System: System Check Signal - CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM A (Twin); Type: SAM A; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm; Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.86 mW/g

d=10mm; Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.7 V/m; Power Drift = 0.177 dB


Peak SAR (extrapolated) = 7.57 W/kg

SAR(1 g) = 4.15 mW/g; SAR(10 g) = 2.17 mW/g

Maximum value of SAR (measured) = 5.60 mW/g

d=10mm; Pin=100 mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm


Maximum value of SAR (interpolated) = 6.70 mW/g

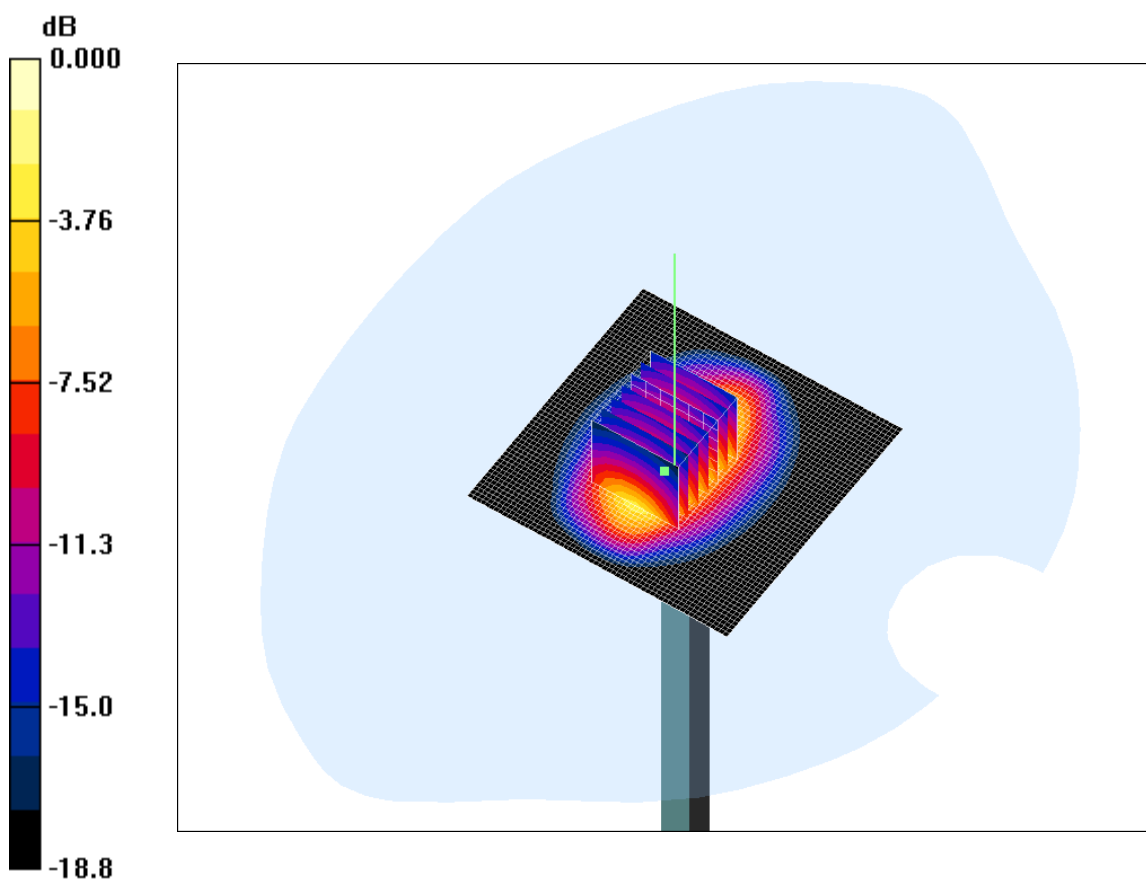

0 dB = 5.60mW/g

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

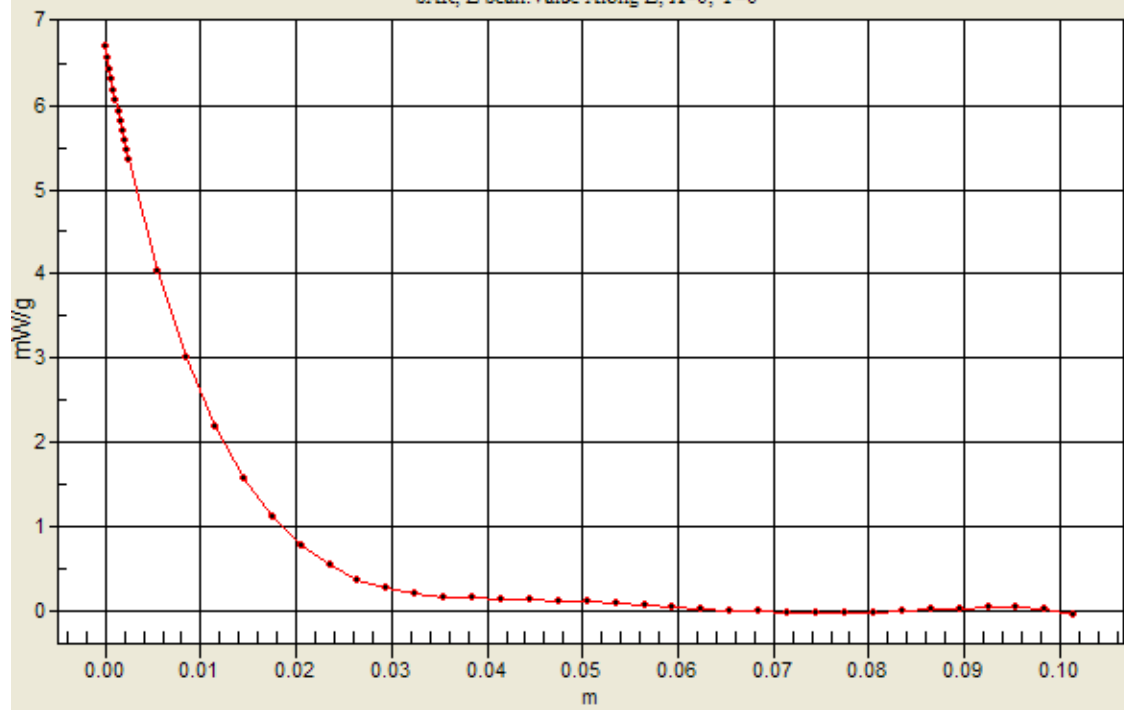

Test Laboratory: UL CCS SAR Lab D

302 System Performance Check 835MHz Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d117

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(8.82, 8.82, 8.82); Calibrated: 12/13/2010
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM B (Twin); Type: SAM B; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=100mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.17 mW/g

d=15mm, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.7 V/m; Power Drift = 0.033 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.974 mW/g; SAR(10 g) = 0.636 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

d=15mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm


Maximum value of SAR (interpolated) = 0.648 mW/g

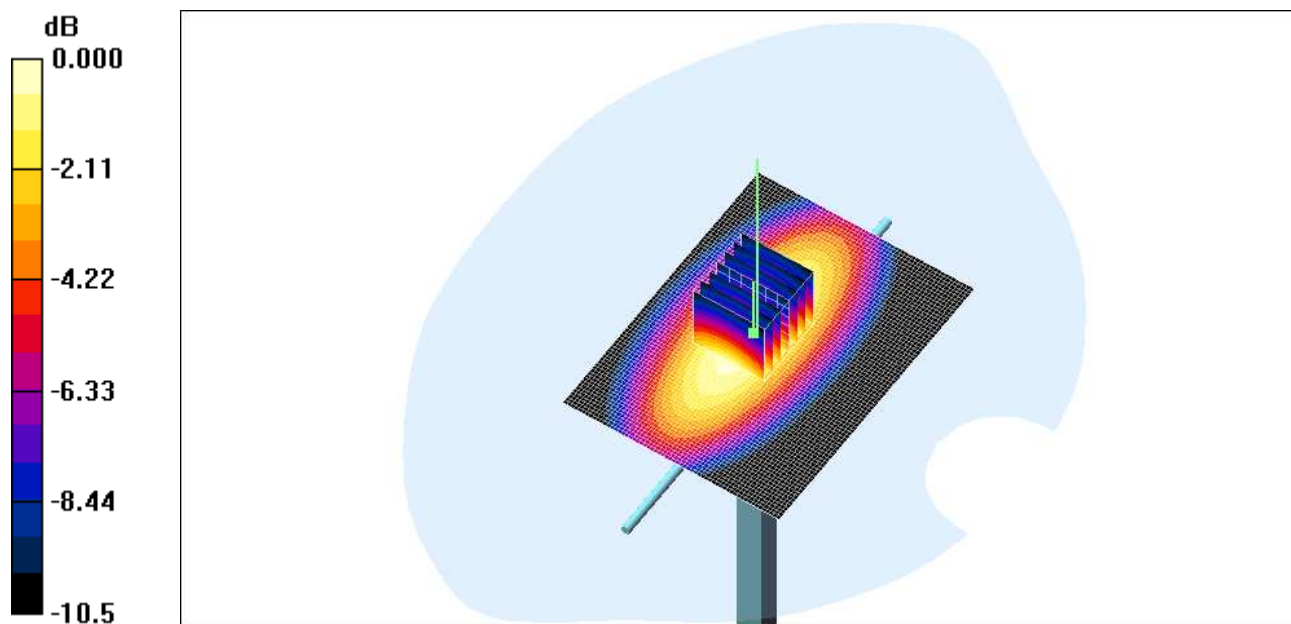

0 dB = 1.19mW/g

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

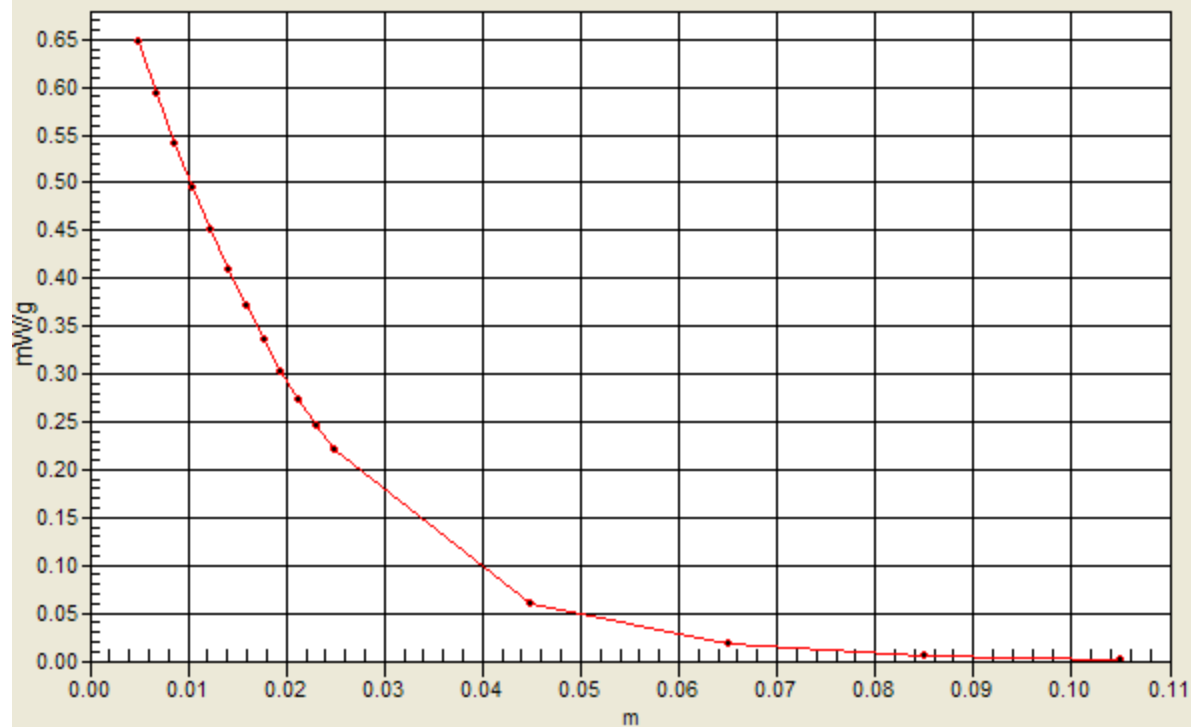

Test Laboratory: UL CCS SAR Lab D

303 System Performance Check 835MHz Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d117

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(8.79, 8.79, 8.79); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM A (Twin); Type: SAM A; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=100 mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

d=15mm, Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.2 V/m; Power Drift = 0.078 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.683 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

d=15mm, Pin=100 mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm


Maximum value of SAR (interpolated) = 1.51 mW/g

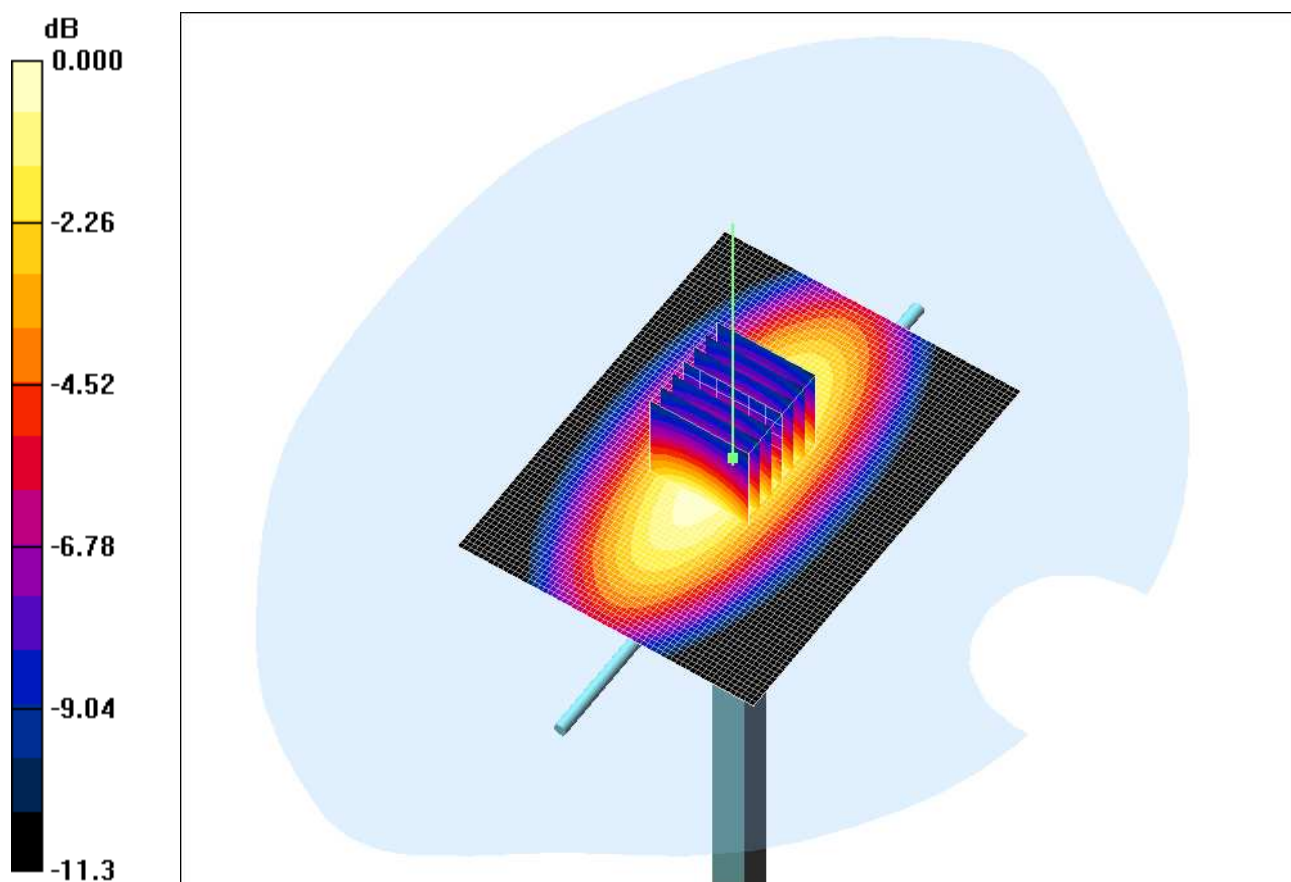

0 dB = 1.22mW/g

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

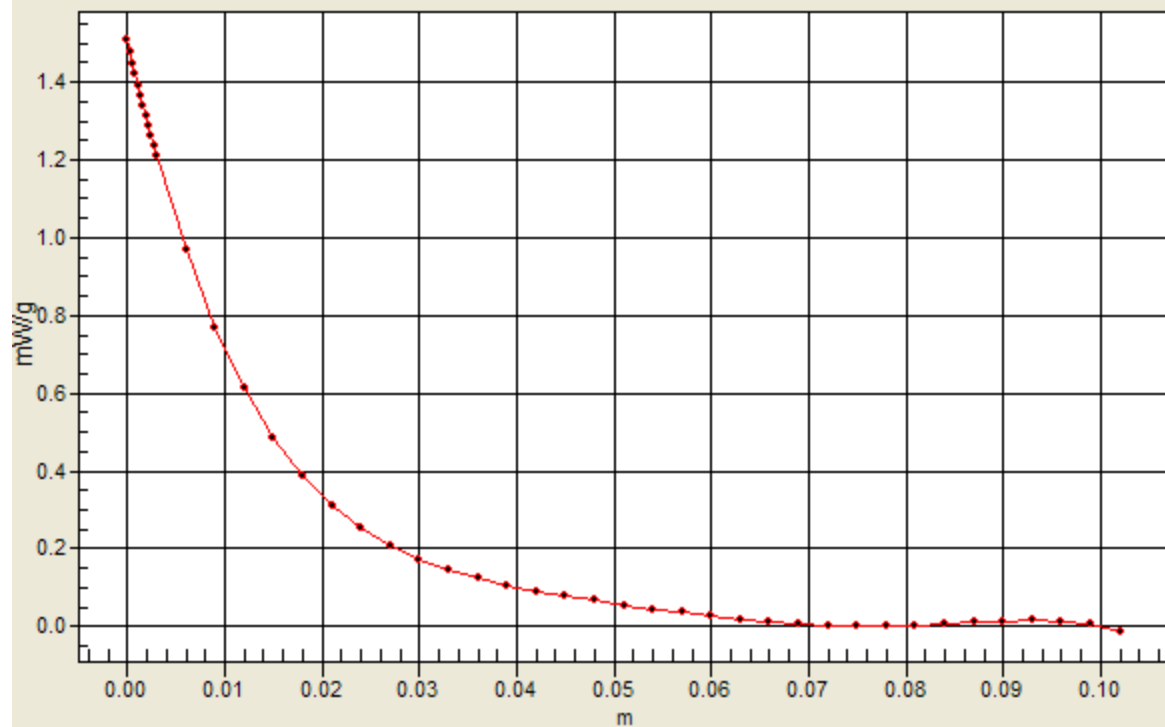

Test Laboratory: UL CCS SAR Lab D

304 System Performance Check 835MHz Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d117

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(8.79, 8.79, 8.79); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010305
- Phantom: SAM A (Twin); Type: SAM A; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=100mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g

d=15mm, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.0 V/m; Power Drift = 0.075 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.991 mW/g; SAR(10 g) = 0.649 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

d=15mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm


Maximum value of SAR (interpolated) = 0.693 mW/g

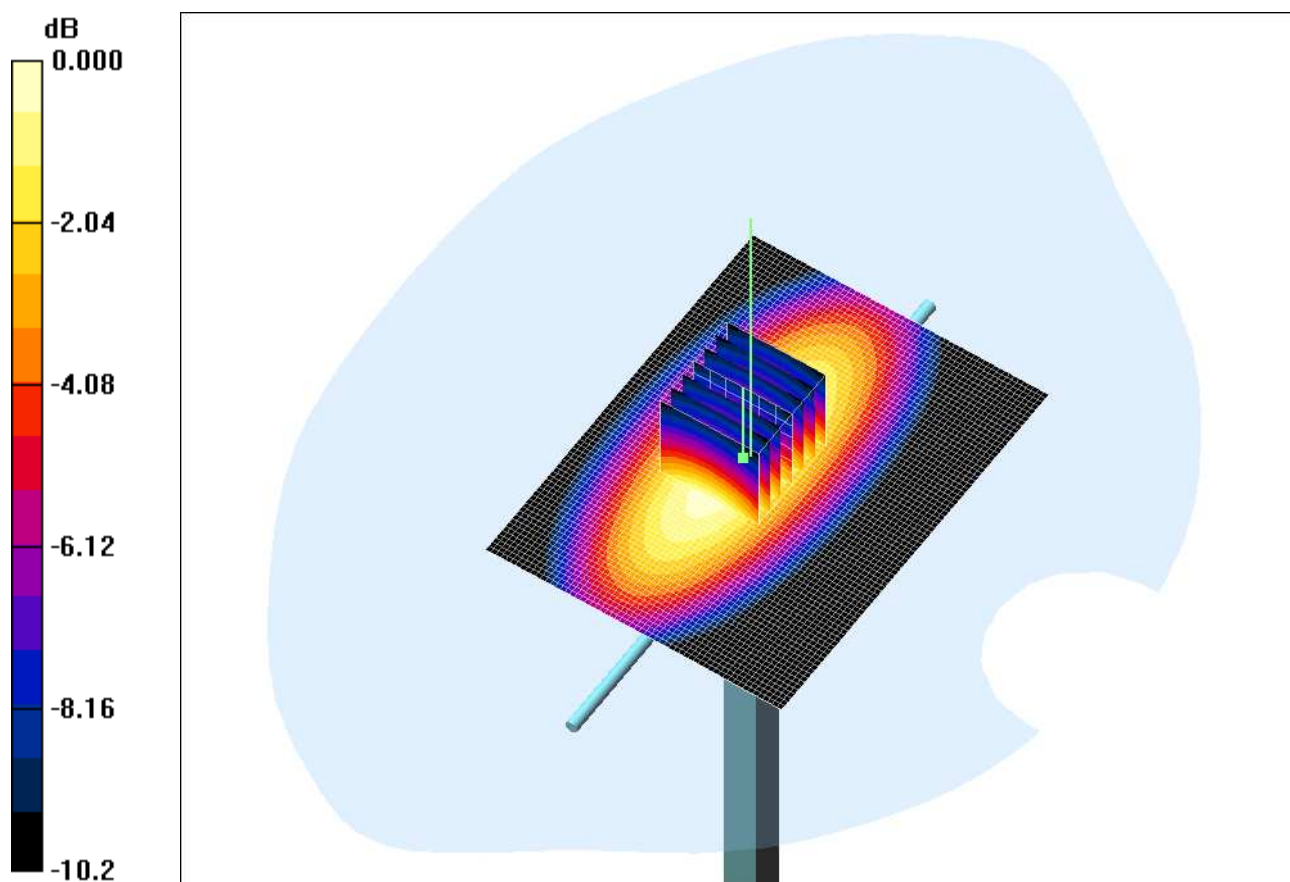

0 dB = 1.07mW/g

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

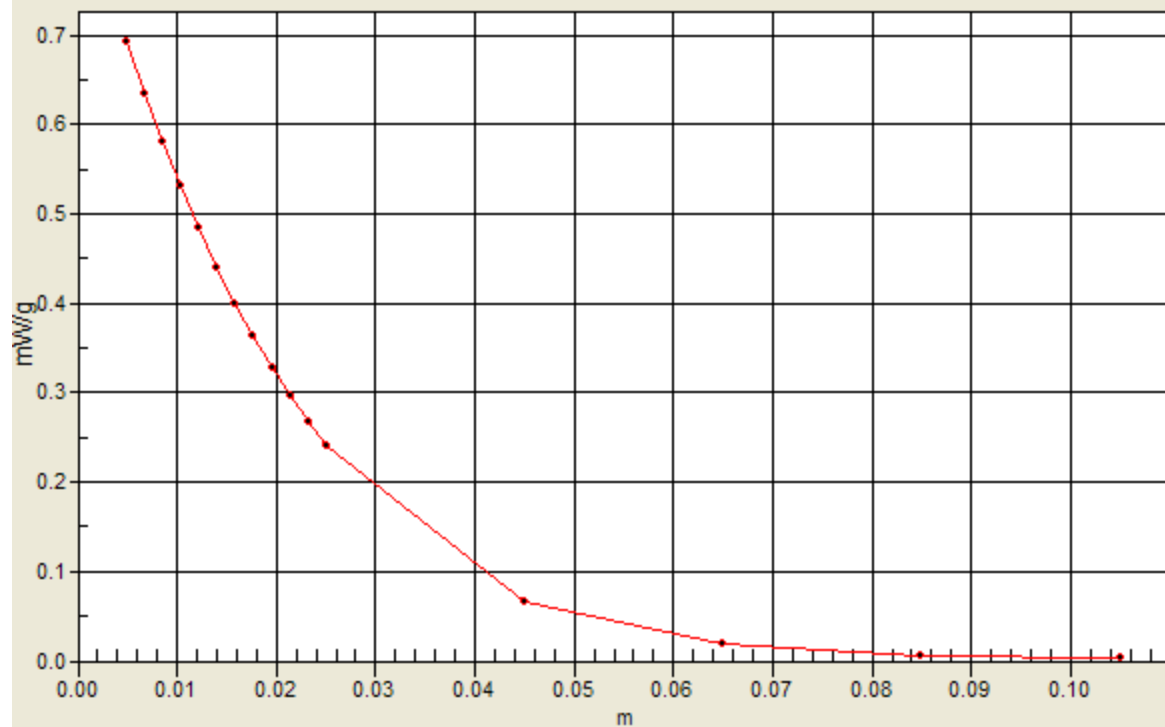

Test Laboratory: UL CCS SAR Lab D

305 System Performance Check 835MHz Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d117

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(8.82, 8.82, 8.82); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM B (Twin); Type: SAM B; Serial: TP-105
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=100 mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

d=15mm, Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.1 V/m; Power Drift = 0.015 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.940 mW/g; SAR(10 g) = 0.613 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

d=15mm, Pin=100 mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm


Maximum value of SAR (interpolated) = 1.33 mW/g

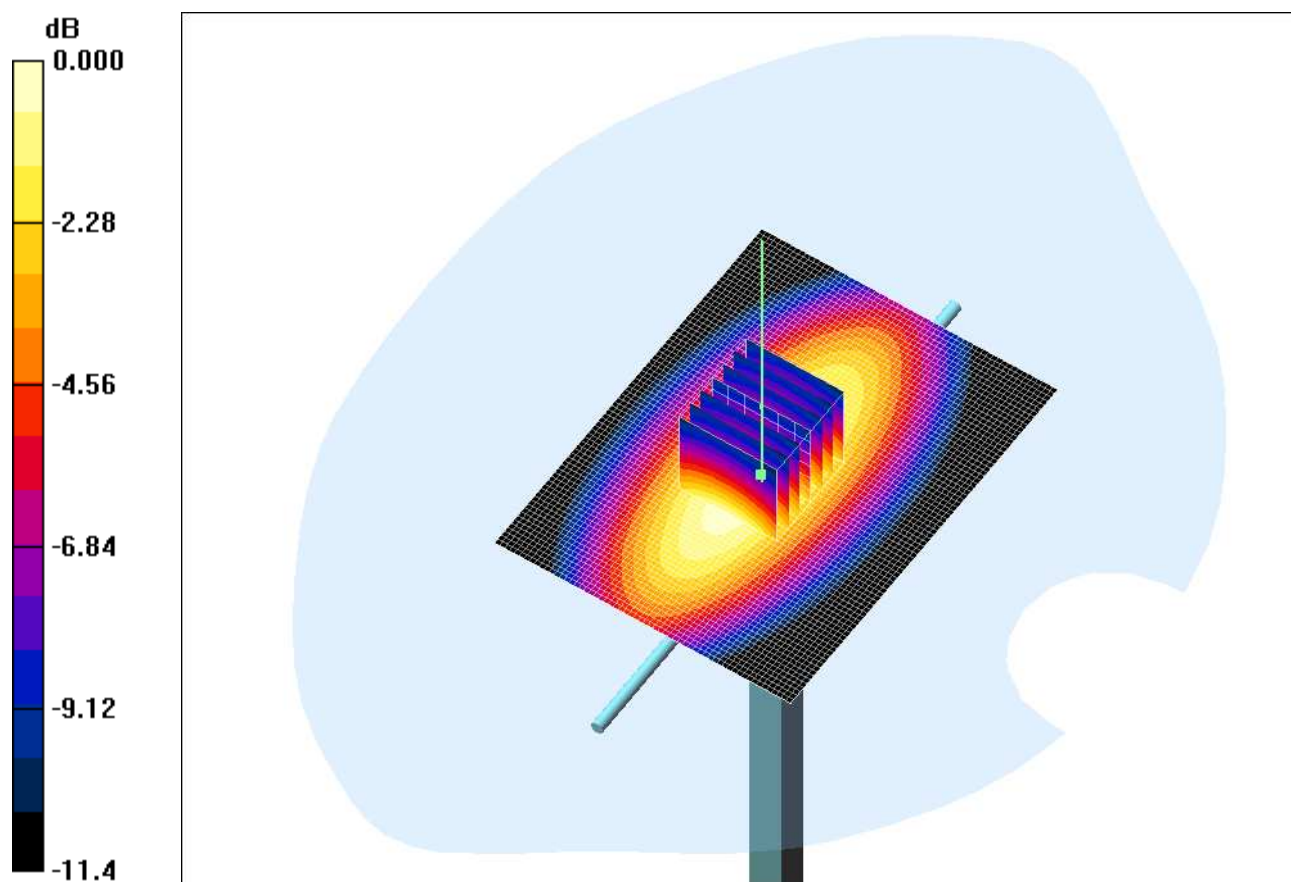

0 dB = 1.10mW/g

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

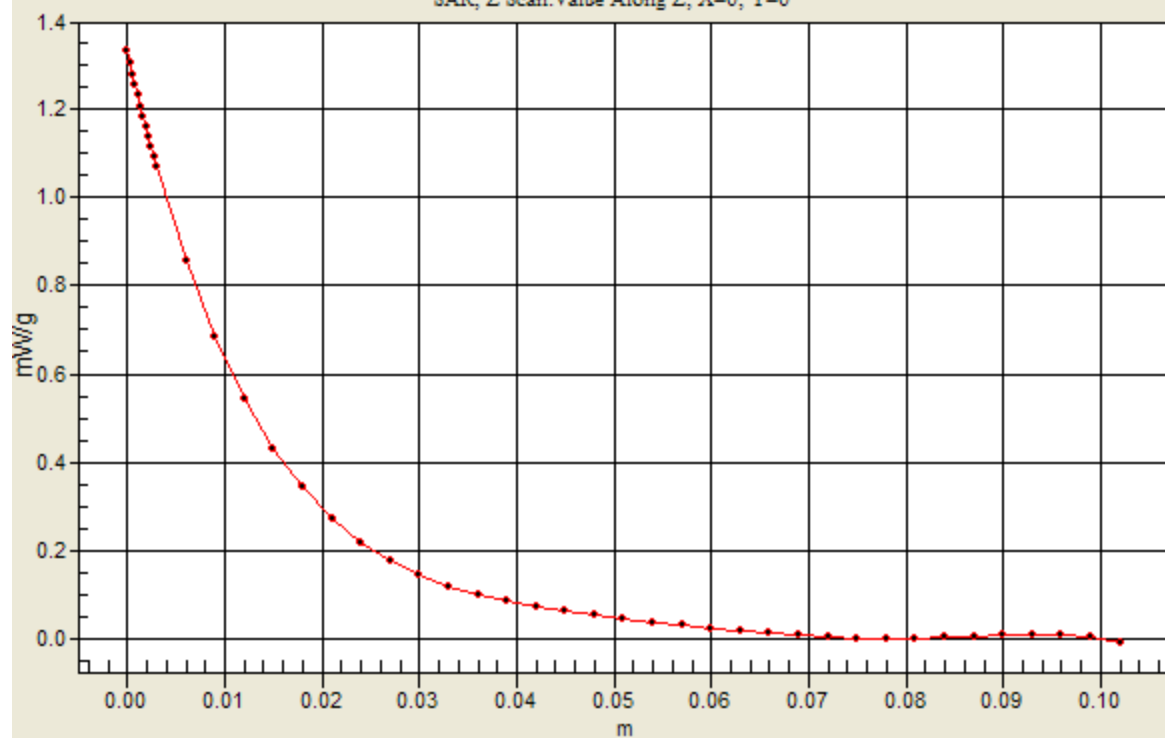

Test Laboratory: UL CCS SAR Lab D

306 System Performance Check 1900MHz Head

DUT: Dipole; Type: D1900V2; Serial: 5d140

Communication System: System Check Signal - CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.36, 7.36, 7.36); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.45 mW/g

d=10mm, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.9 V/m; Power Drift = 0.104 dB


Peak SAR (extrapolated) = 7.62 W/kg

SAR(1 g) = 4.02 mW/g; SAR(10 g) = 2.08 mW/g

Maximum value of SAR (measured) = 5.10 mW/g


d=10mm, Pin=100mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm

Maximum value of SAR (interpolated) = 6.49 mW/g

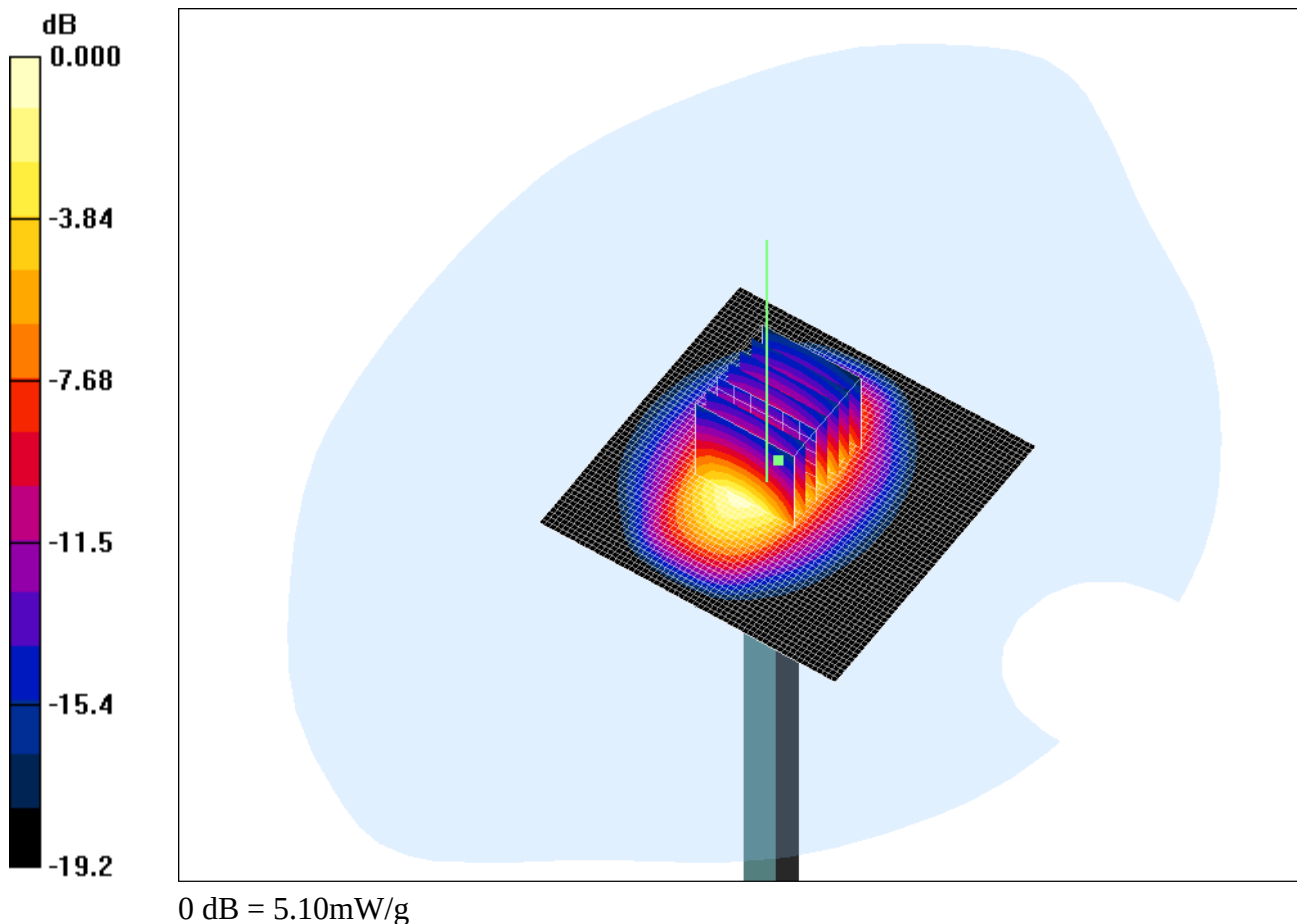

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

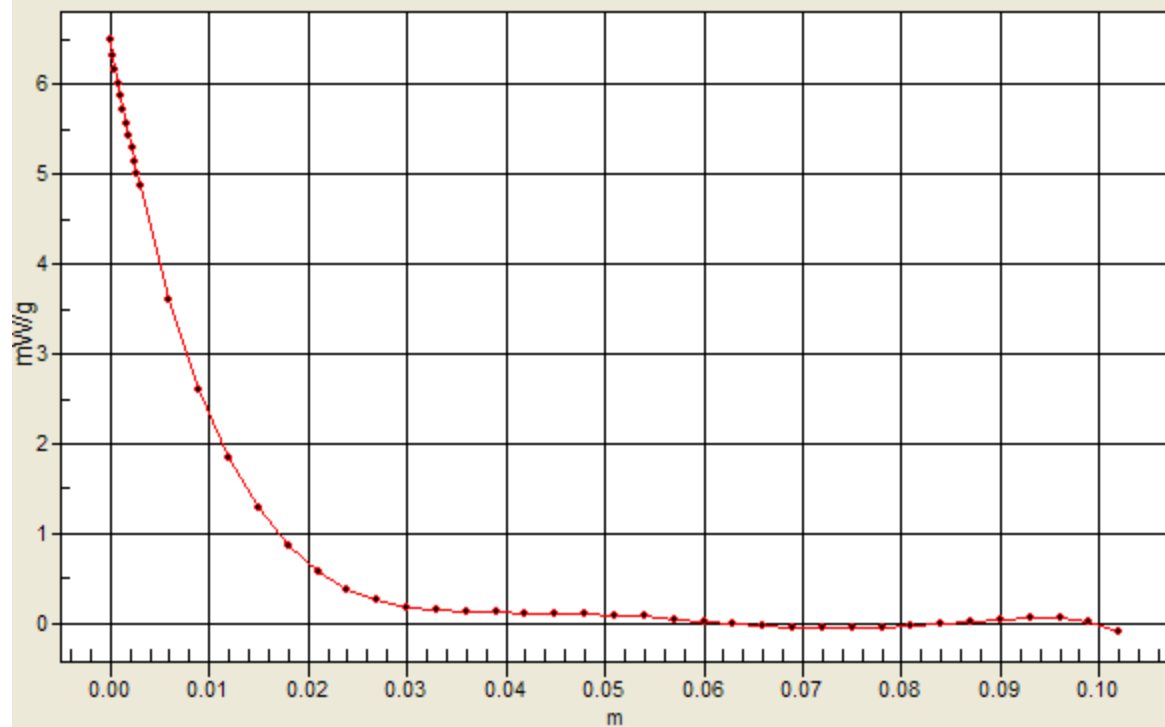

Test Laboratory: UL CCS SAR Lab D

307 System Performance Check 1900MHz Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d140

Communication System: System Check Signal - CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM A (Twin); Type: SAM A; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm; Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.83 mW/g

d=10mm; Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.7 V/m; Power Drift = 0.177 dB


Peak SAR (extrapolated) = 7.52 W/kg

SAR(1 g) = 4.13 mW/g; SAR(10 g) = 2.16 mW/g

Maximum value of SAR (measured) = 5.56 mW/g


d=10mm; Pin=100 mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm

Maximum value of SAR (interpolated) = 6.65 mW/g

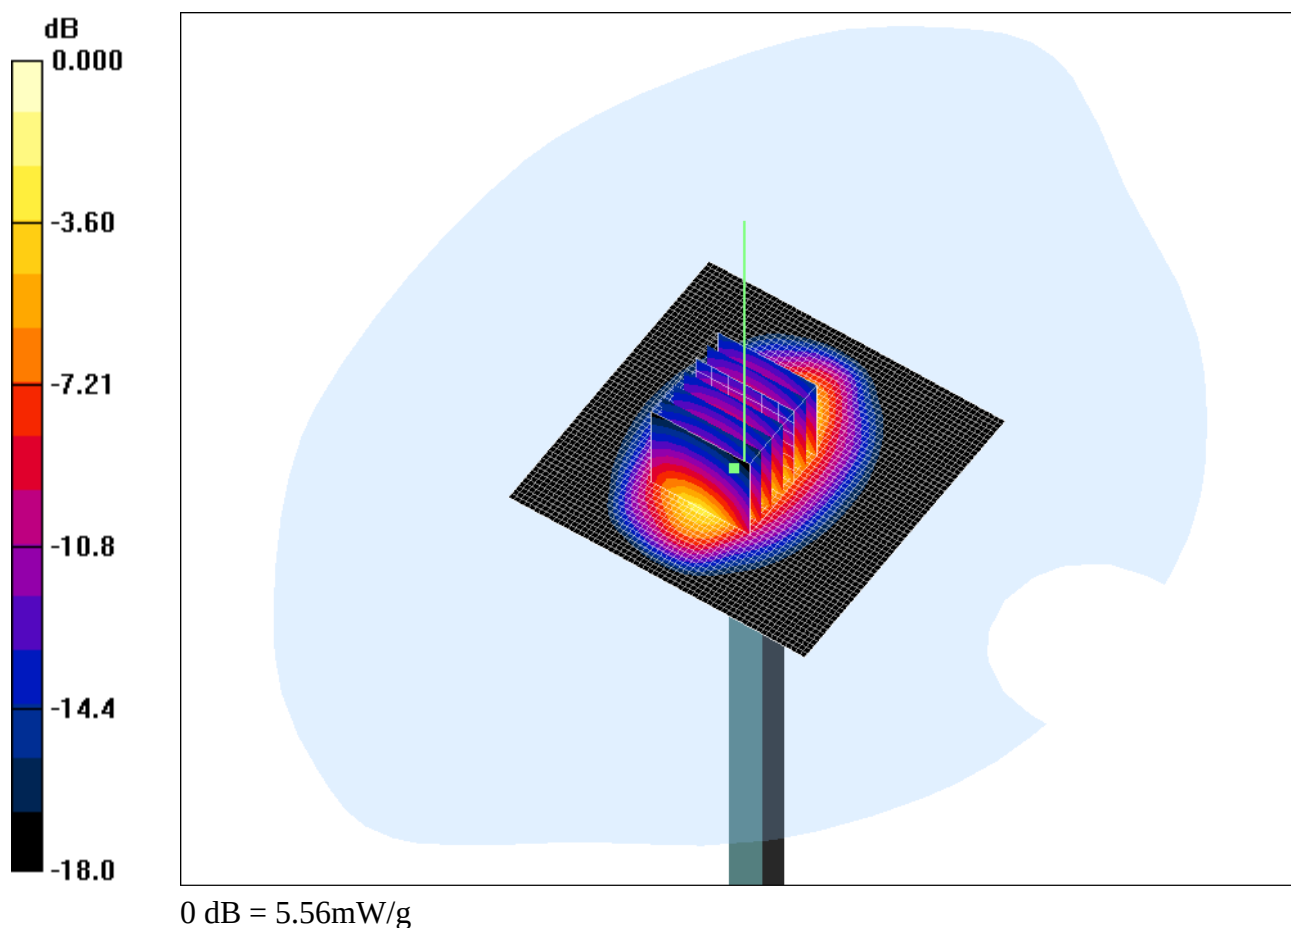

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

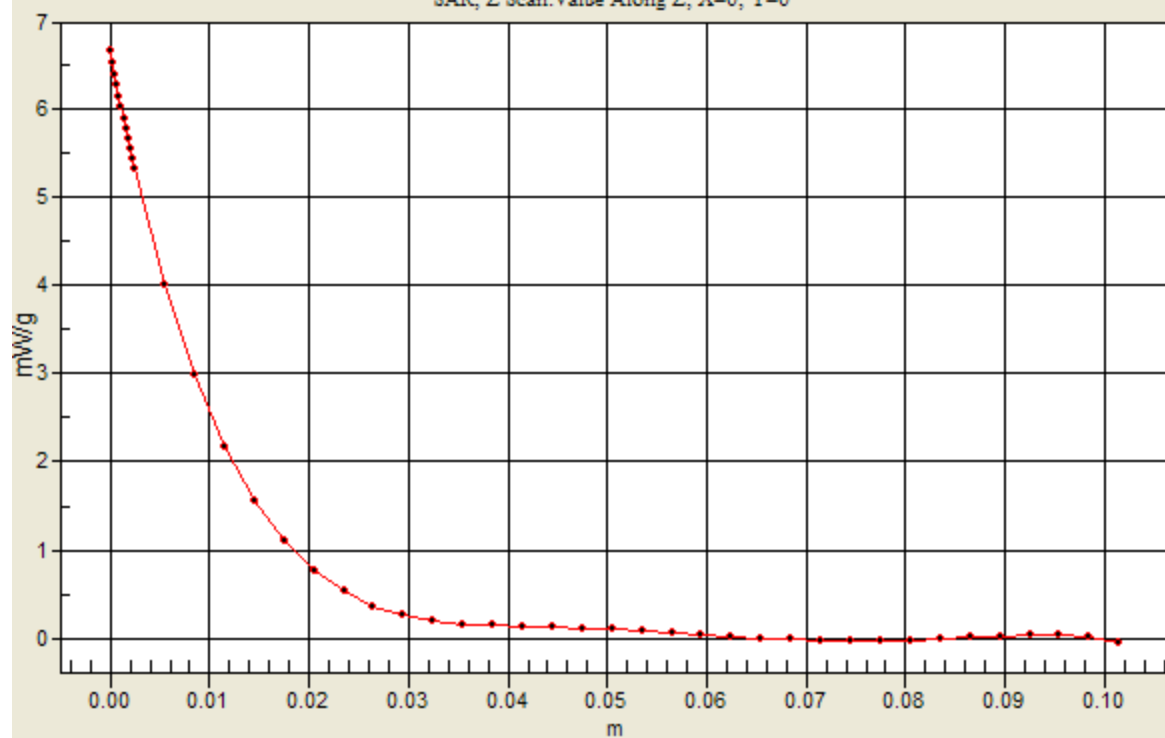

Test Laboratory: UL CCS SAR Lab D

308 System Performance Check 1900MHz Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d140

Communication System: System Check Signal - CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM B (Twin); Type: SAM B; Serial: TP-105
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm; Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.47 mW/g

d=10mm; Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.9 V/m; Power Drift = 0.117 dB


Peak SAR (extrapolated) = 7.12 W/kg

SAR(1 g) = 3.93 mW/g; SAR(10 g) = 2.06 mW/g

Maximum value of SAR (measured) = 5.30 mW/g


d=10mm; Pin=100 mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm

Maximum value of SAR (interpolated) = 6.33 mW/g

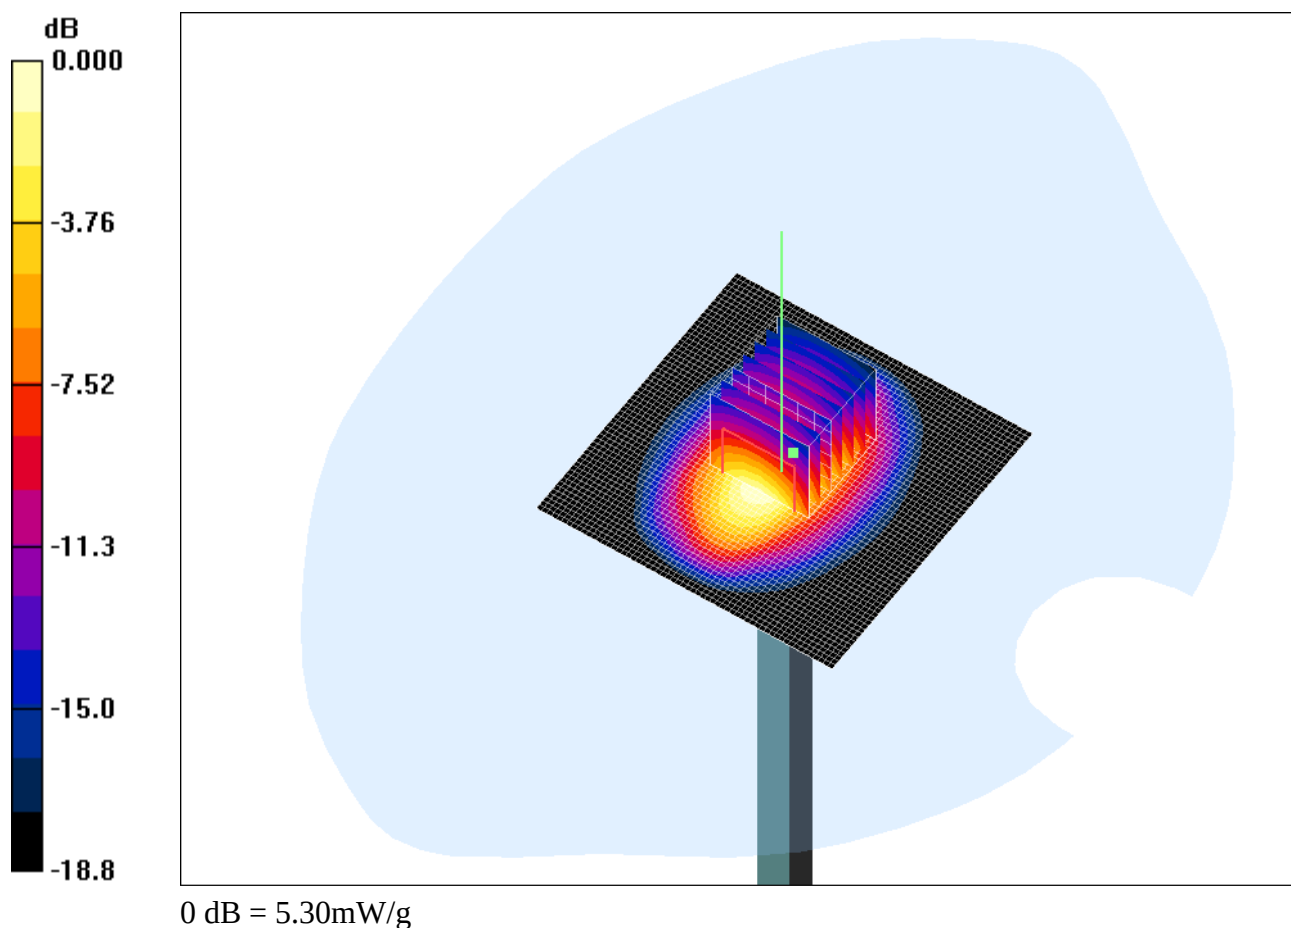

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

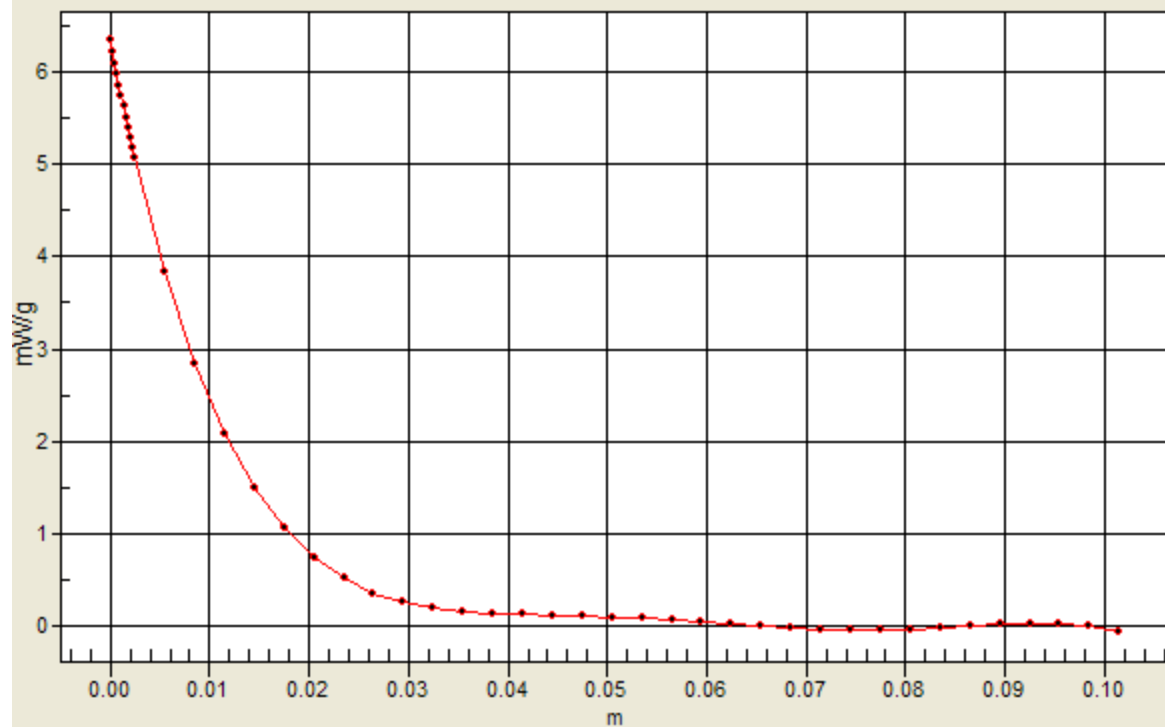

Test Laboratory: UL CCS SAR Lab D

309 System Performance Check 1900MHz Head

DUT: Dipole; Type: D1900V2; Serial: 5d140

Communication System: System Check Signal - CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.36, 7.36, 7.36); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM A (Twin); Type: QD000P40CA; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm; Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.73 mW/g

d=10mm; Pin=100 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.4 V/m; Power Drift = 0.154 dB


Peak SAR (extrapolated) = 7.76 W/kg

SAR(1 g) = 4.09 mW/g; SAR(10 g) = 2.11 mW/g

Maximum value of SAR (measured) = 5.52 mW/g


d=10mm; Pin=100 mW/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=3mm

Maximum value of SAR (interpolated) = 6.72 mW/g

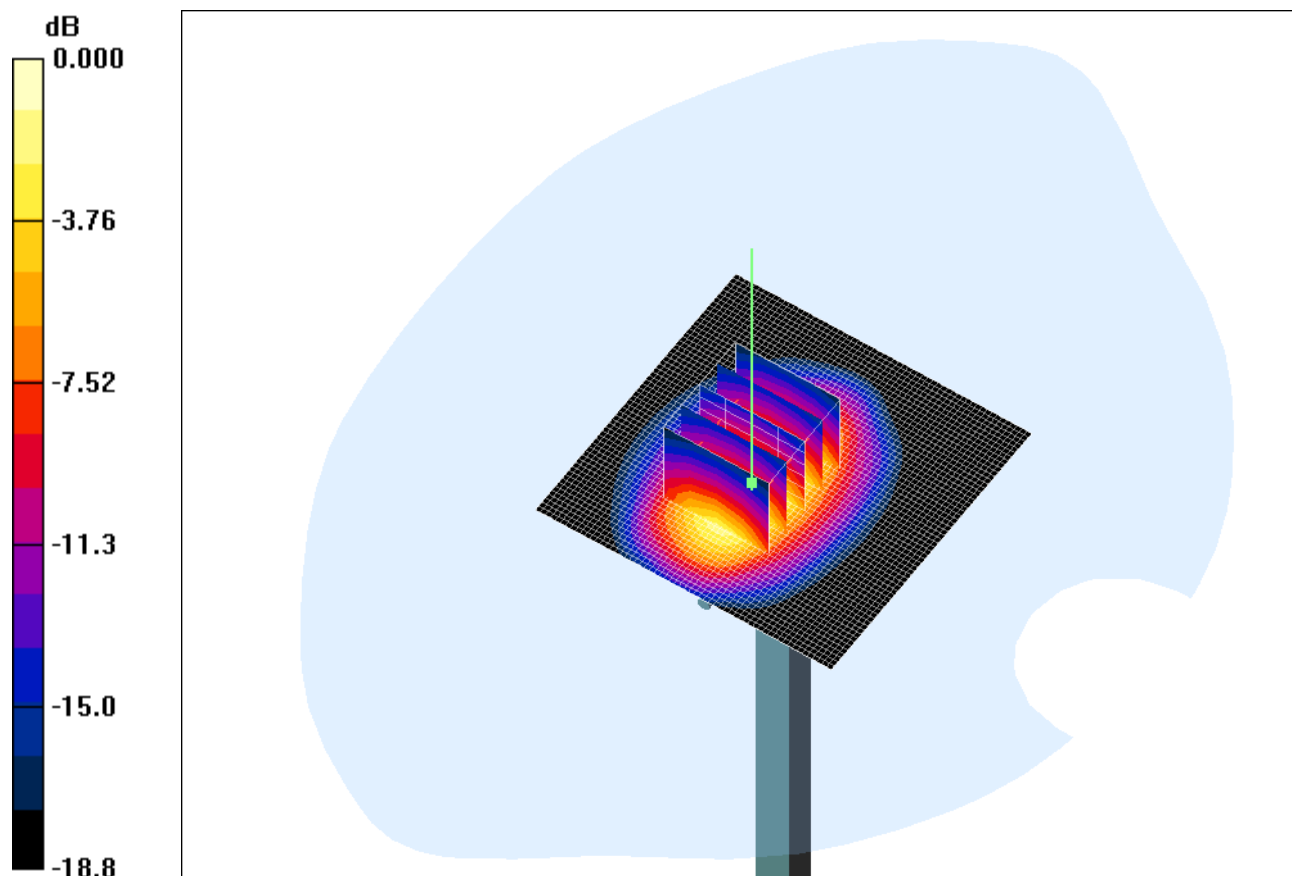

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

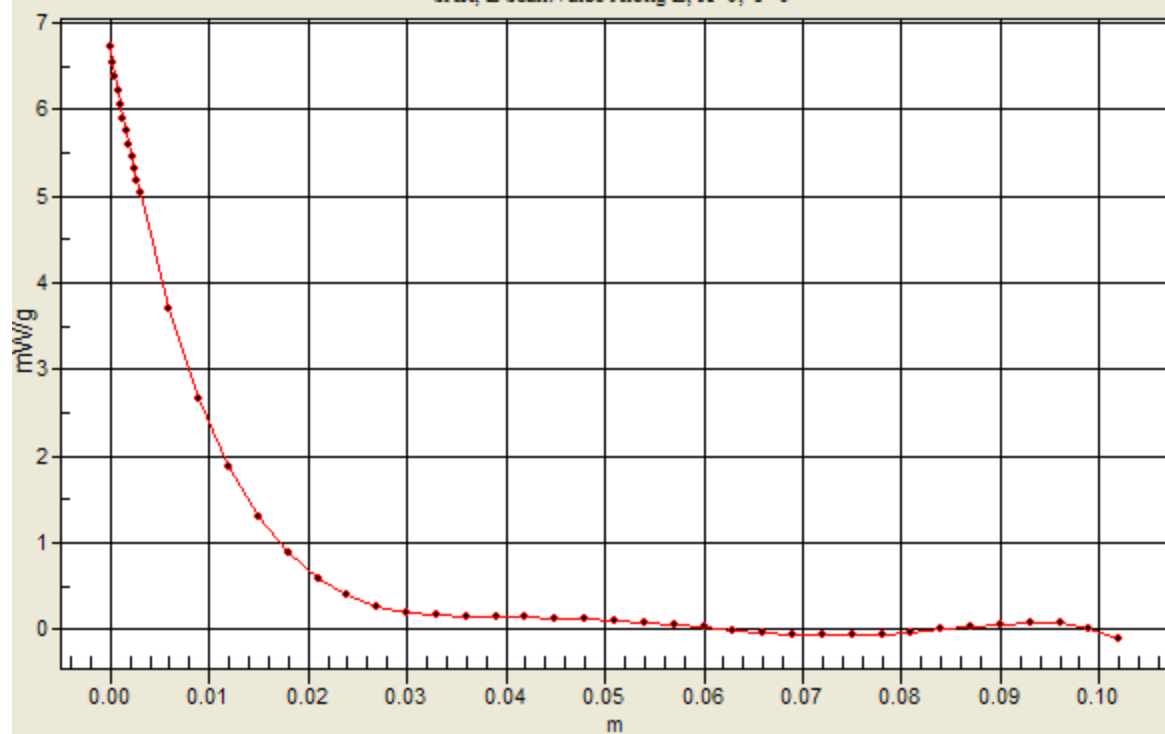

Test Laboratory: UL CCS SAR Lab D

310 System Performance Check 835MHz Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d117

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(8.82, 8.82, 8.82); Calibrated: 12/13/2010
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM B (Twin); Type: SAM B; Serial: TP-105
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=100mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.13 mW/g

d=15mm, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.1 V/m; Power Drift = 0.054 dB


Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.620 mW/g

Maximum value of SAR (measured) = 1.16 mW/g


d=15mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 0.562 mW/g

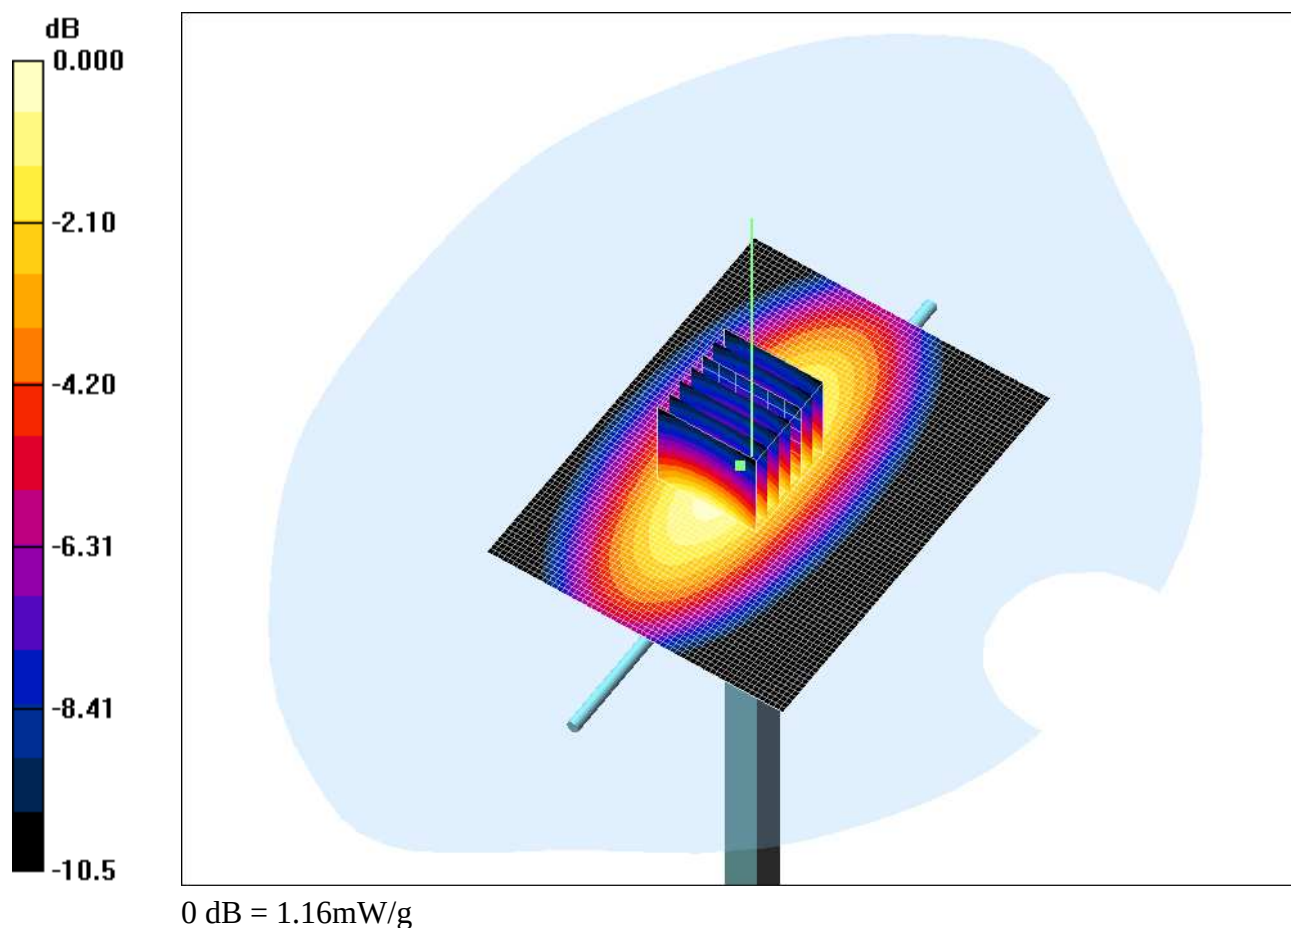

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

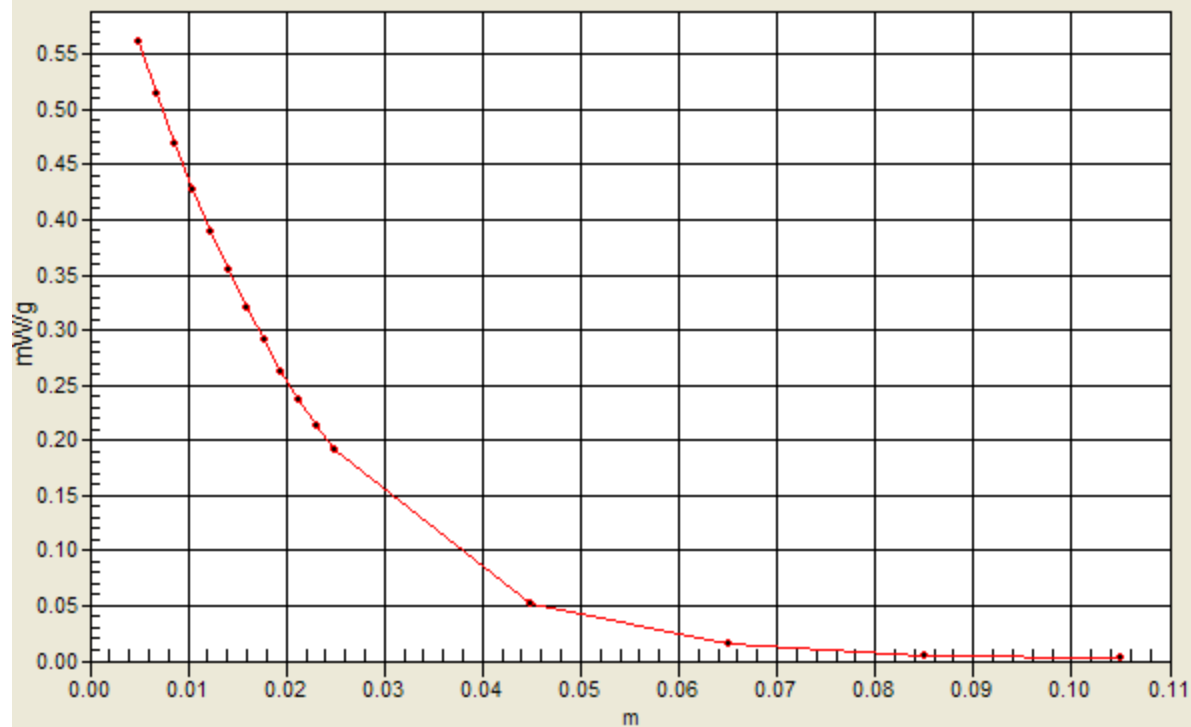

Test Laboratory: UL CCS SAR Lab D

311 System Performance Check 835MHz Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d117

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(8.82, 8.82, 8.82); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM A (Twin); Type: SAM A; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=100mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g

d=15mm, Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.0 V/m; Power Drift = 0.075 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.662 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

d=15mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 0.707 mW/g

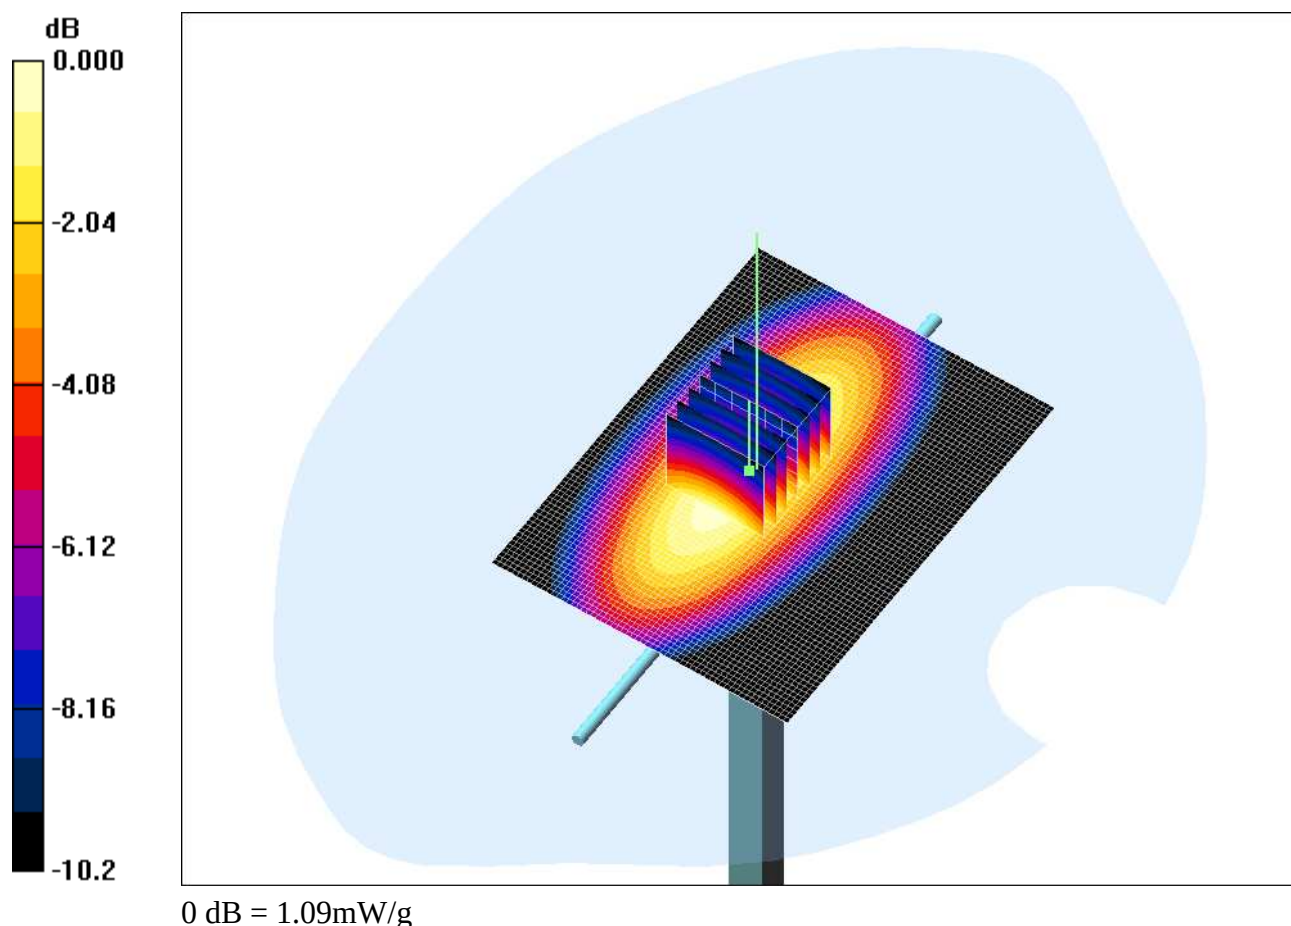

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

