

SCN/11U13867/035: Touch Left 2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.82, 6.82, 6.82); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Center); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Touch Left/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.121 mW/g


FCC/Touch Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.169 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.136 mW/g

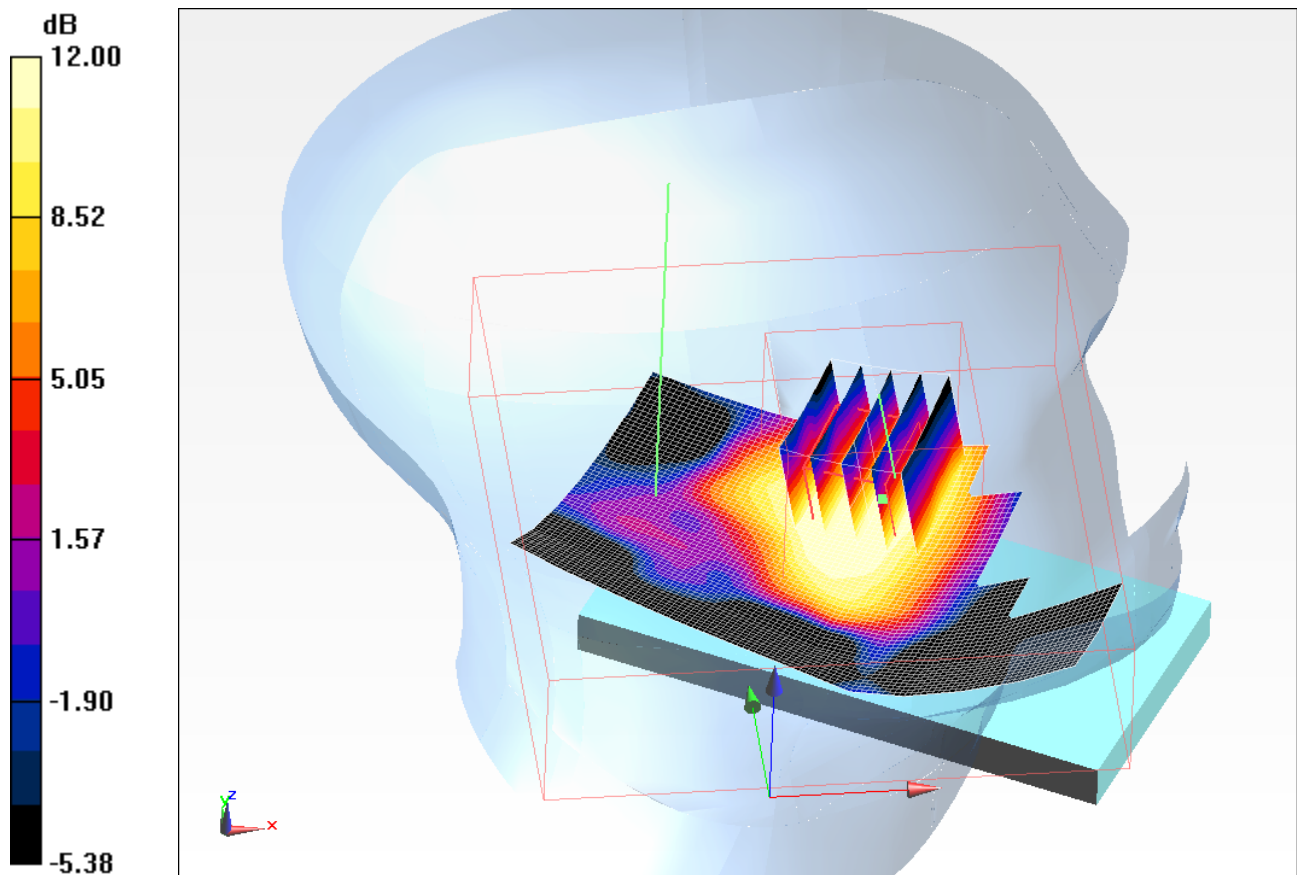

0 dB = 0.005mW/g

SCN/11U13867/036: Tilt Left 2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.82, 6.82, 6.82); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Center); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Tilt Left/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.165 mW/g


FCC/Tilt Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.809 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.076 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

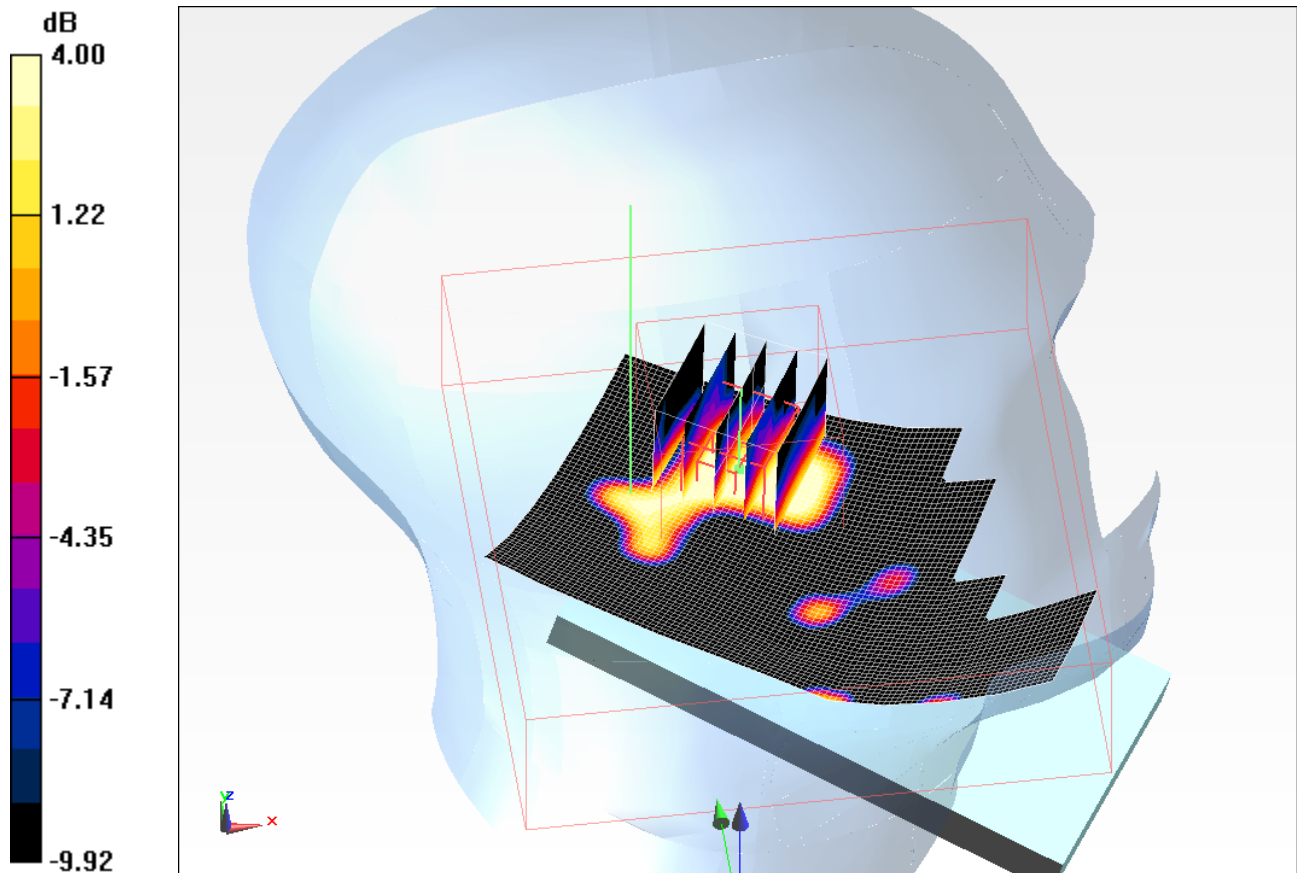

0 dB = 0.020mW/g

SCN/11U13867/037: Touch Right 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.82, 6.82, 6.82); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Center); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

FCC/Touch Right/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.240 mW/g


FCC/Touch Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.871 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

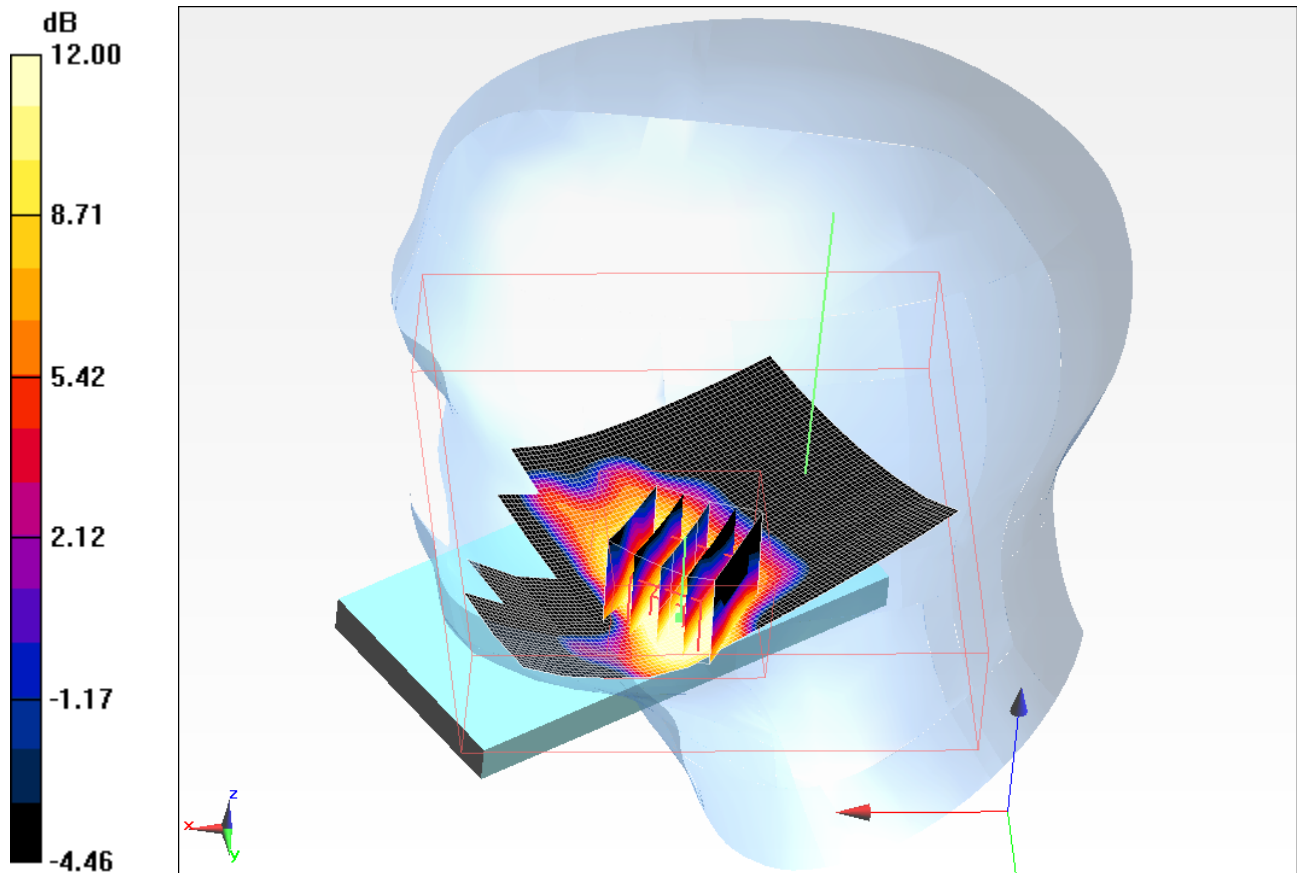

SCN/11U13867/038: Tilt Right 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.82, 6.82, 6.82); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Center); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

FCC/Touch Right/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.071 mW/g


FCC/Touch Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.755 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.058 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

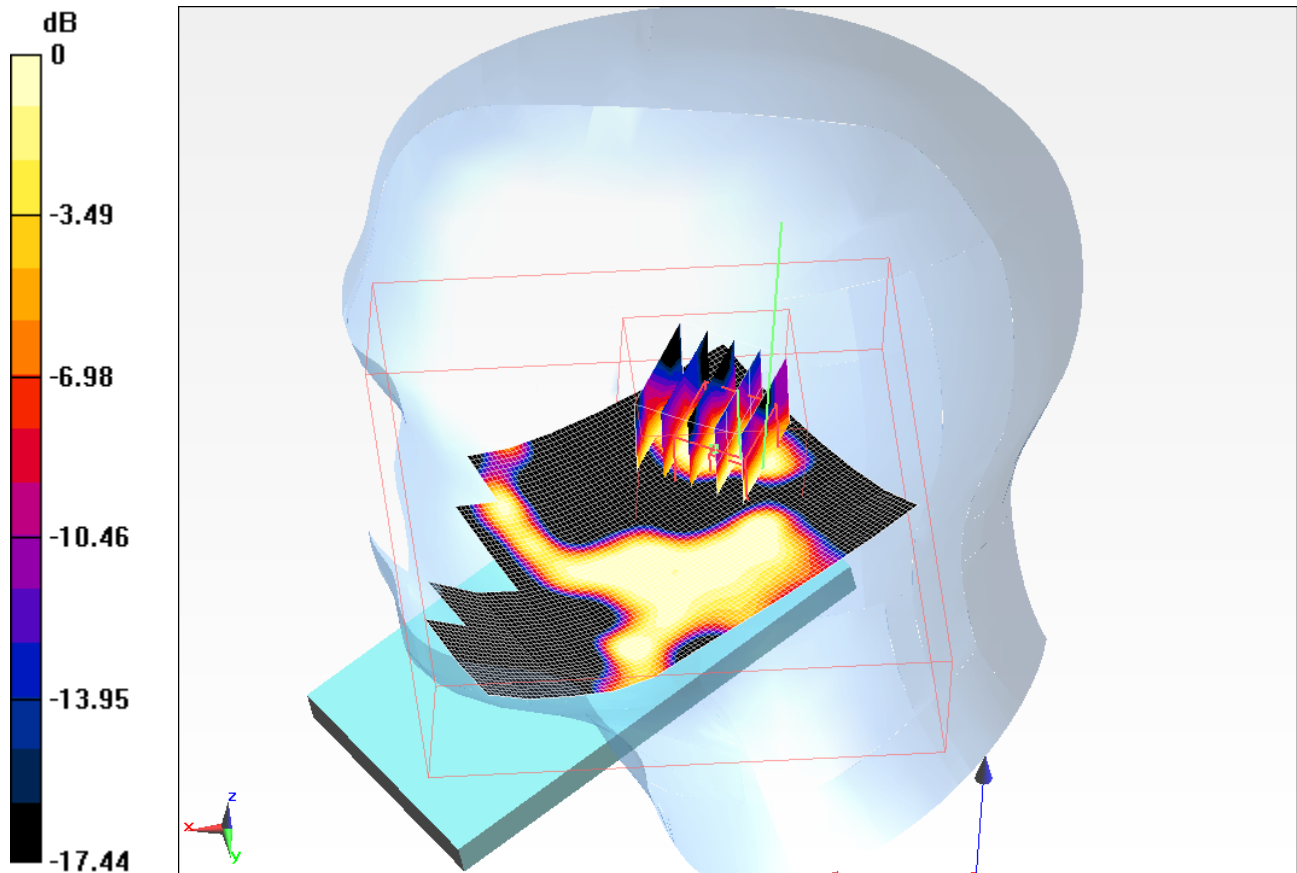

SCN/11U13867/039: Touch Right 802_11b Wireless Charger Cover (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.82, 6.82, 6.82); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Center); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Touch Right/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 mW/g

FCC/Touch Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.849 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.308 W/kg


SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

FCC/Touch Right/Z Scan (1x1x6): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (measured) = 0.026 mW/g

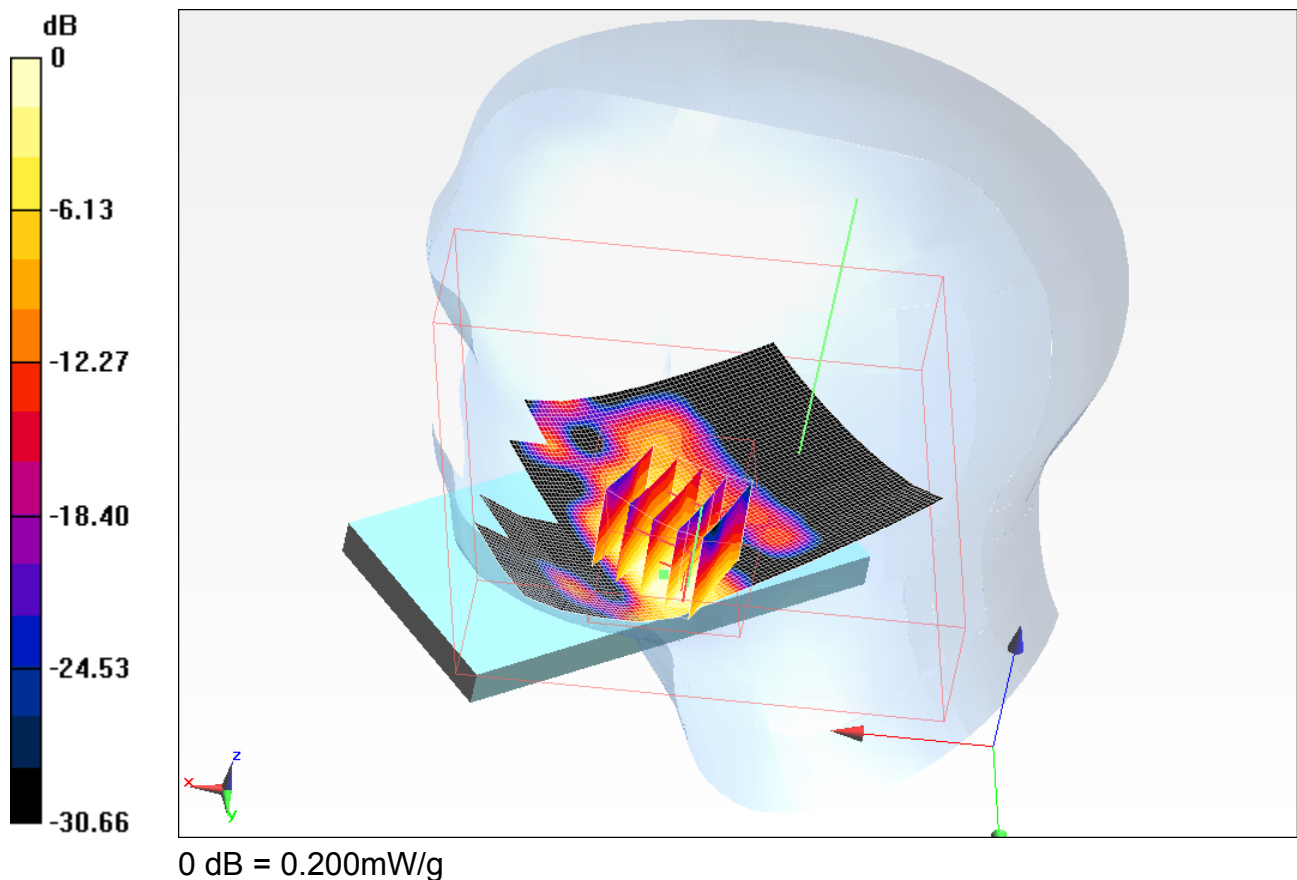

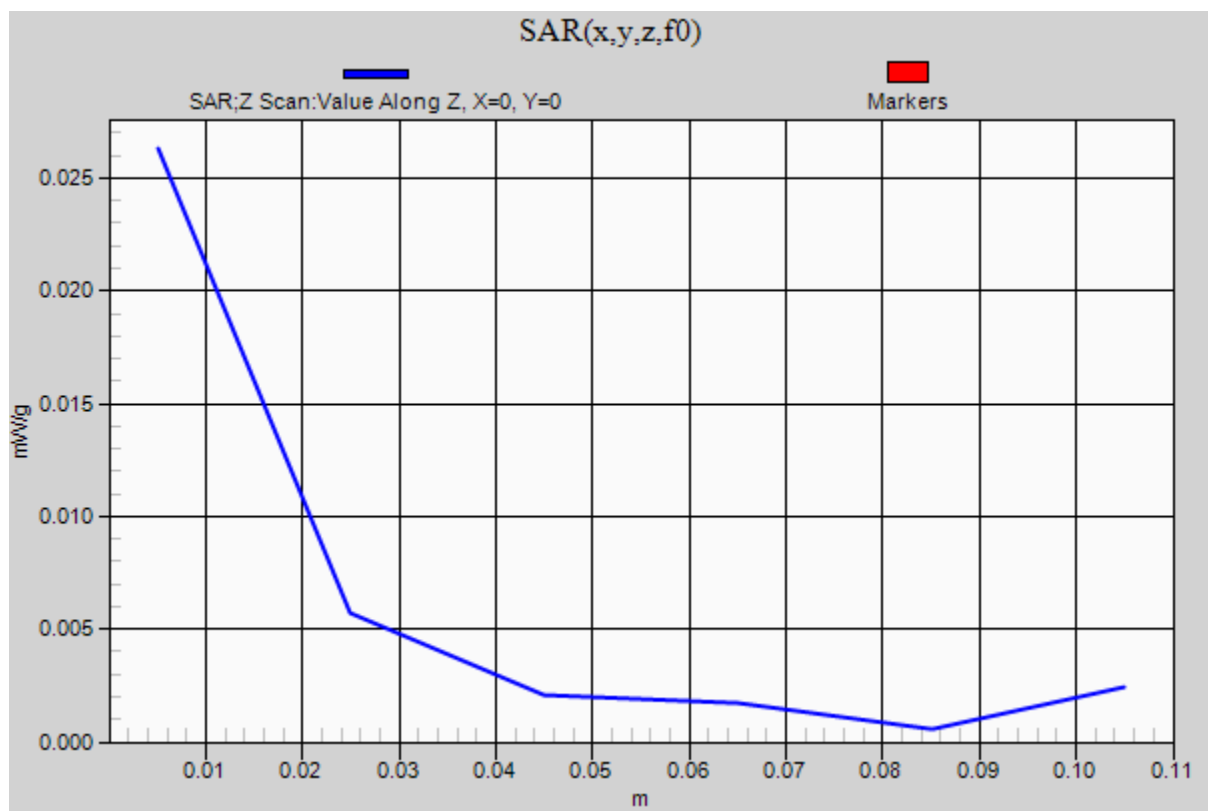

SCN/11U13867/040: Front_2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Front/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.050 mW/g


FCC/Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.241 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.063 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

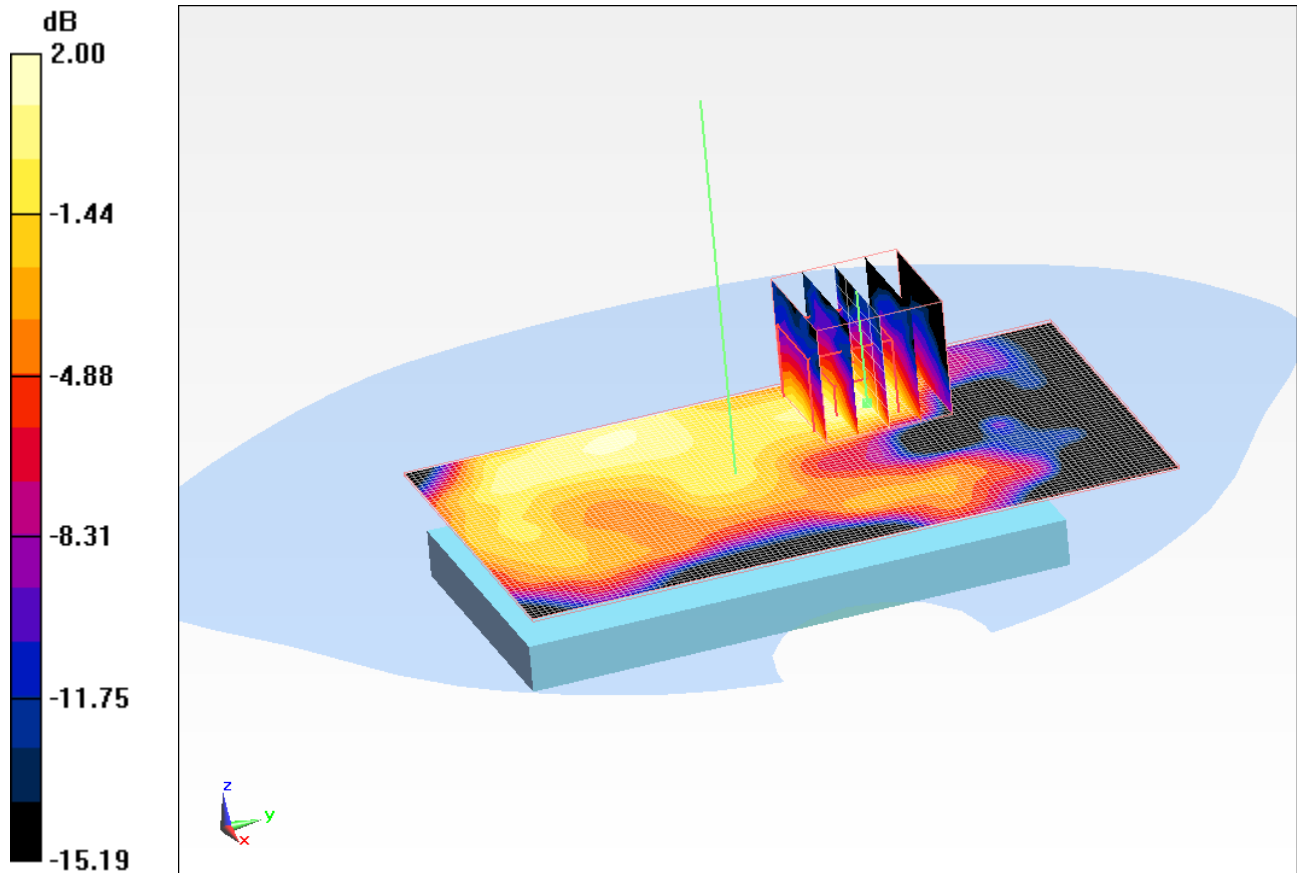

0 dB = 0.040mW/g

SCN/11U13867/041: Rear 2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Rear/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.102 mW/g

FCC/Rear/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.981 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.043 mW/g


Maximum value of SAR (measured) = 0.103 mW/g

FCC/Rear/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.105 mW/g

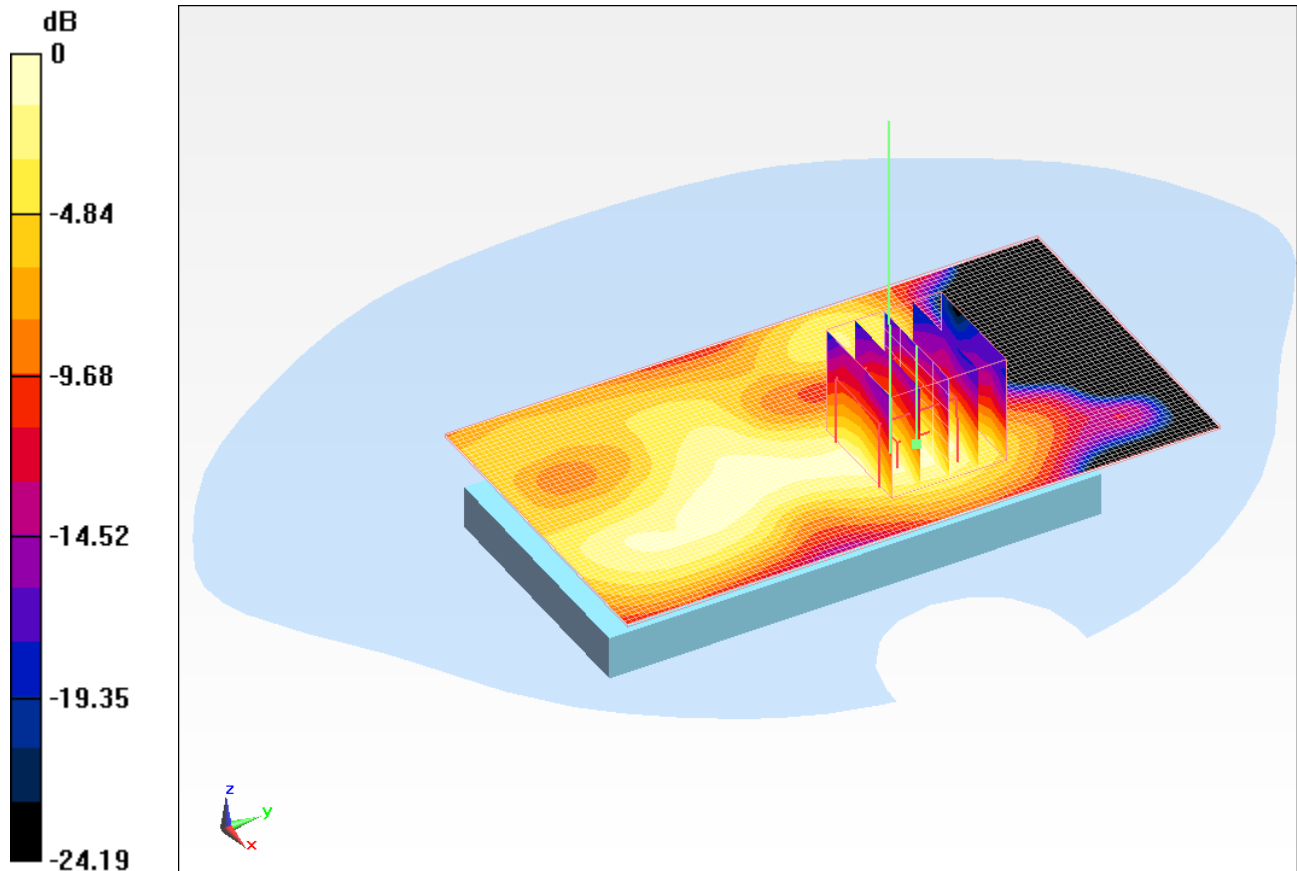

0 dB = 0.110mW/g

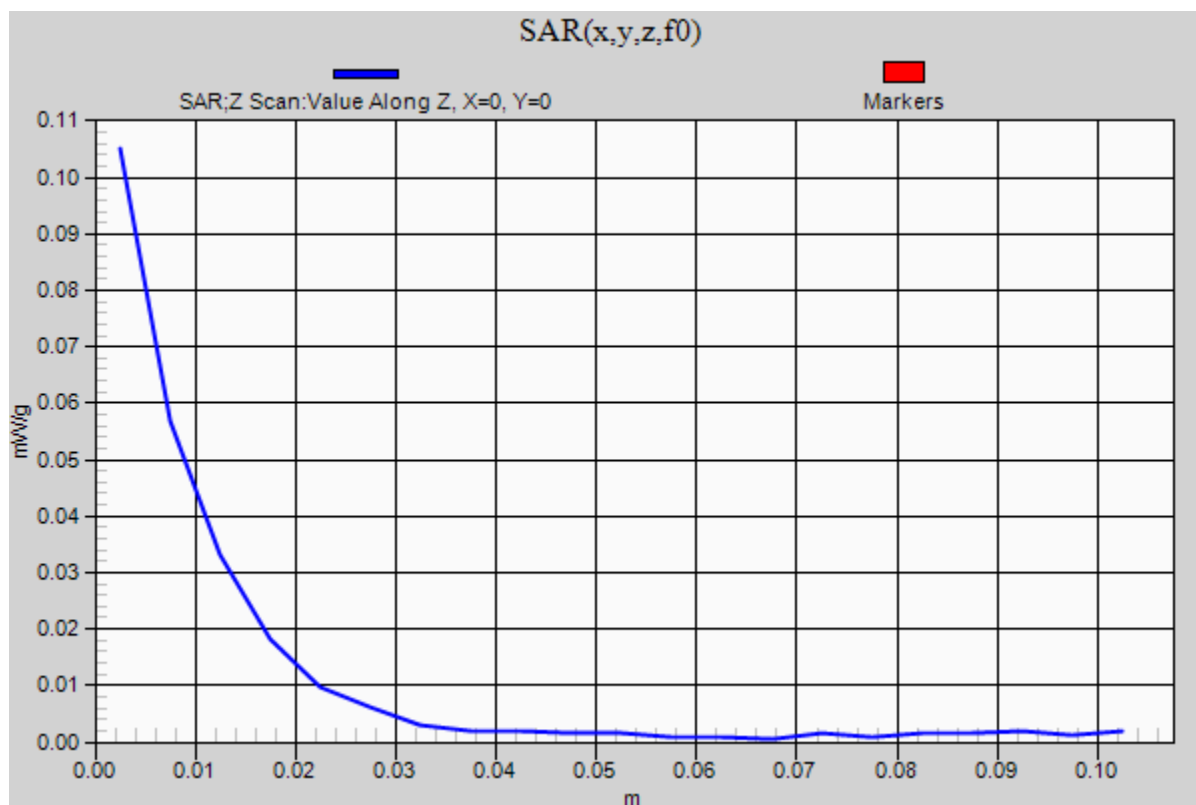

SCN/11U13867/042: Left 2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Left/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.020 mW/g


FCC/Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.334 V/m; Power Drift = -.02 dB

Peak SAR (extrapolated) = 0.020 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00544 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

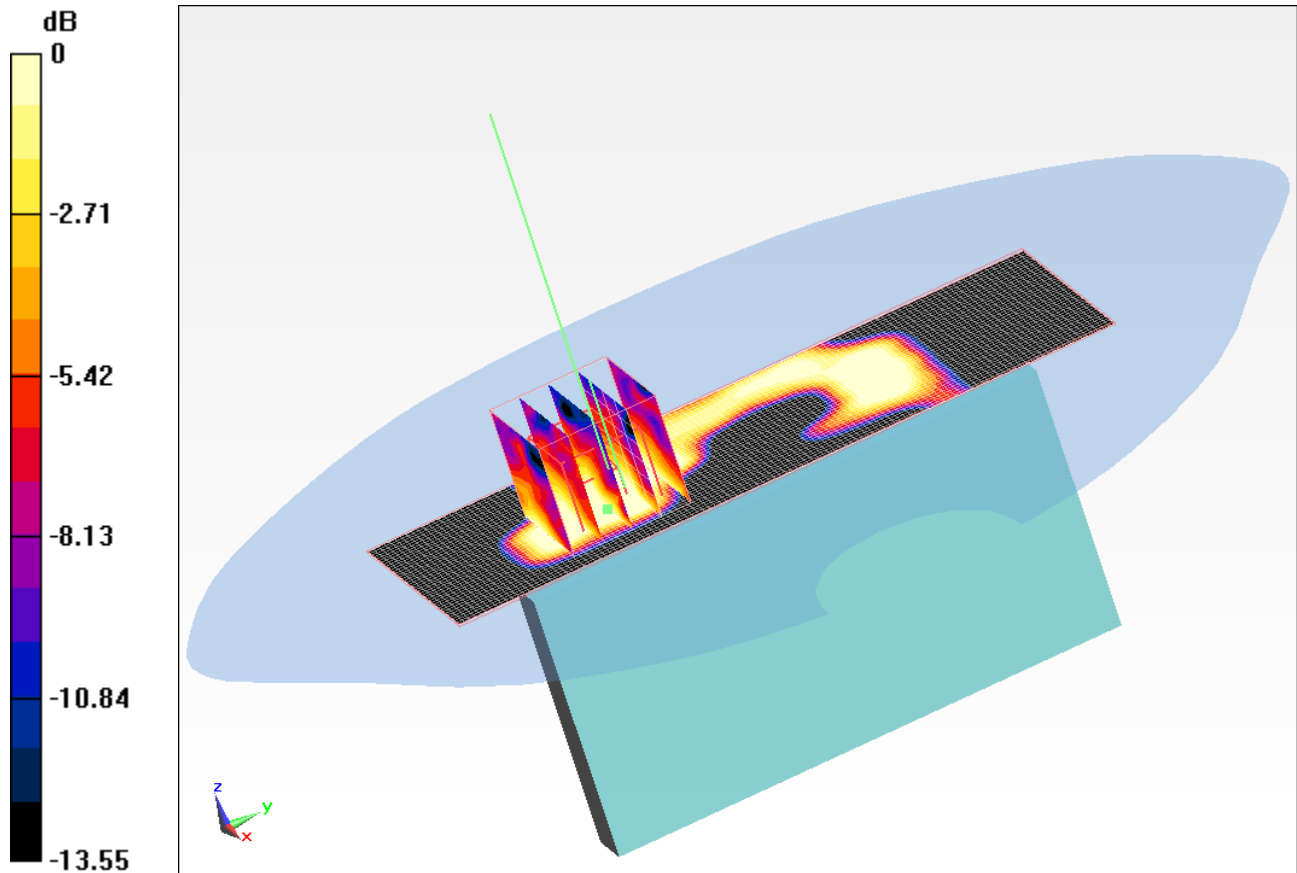

0 dB = 0.0099mW/g

SCN/11U13867/043: Right 2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Right/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.090 mW/g


FCC/Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.847 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

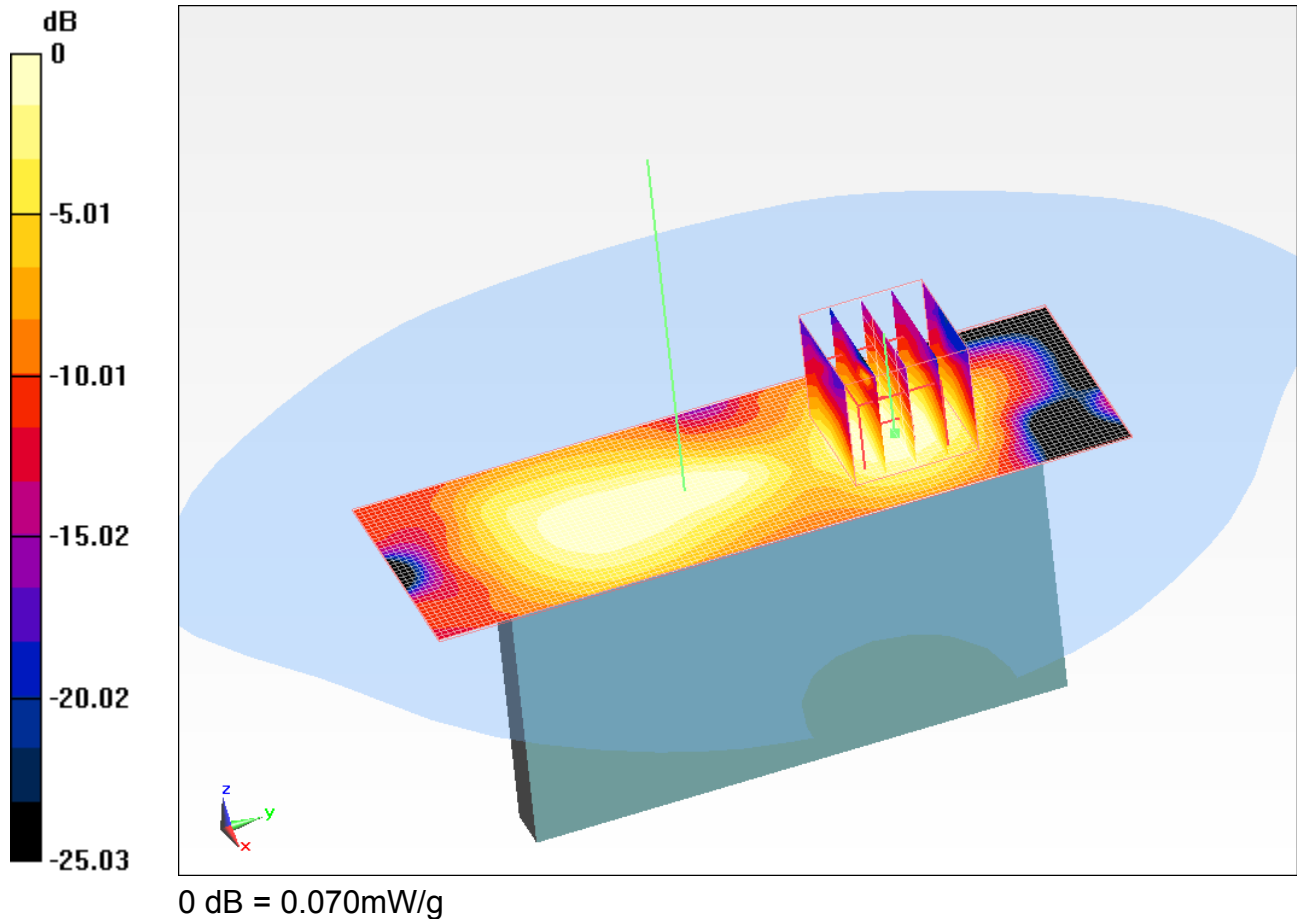

SCN/11U13867/044: Bottom 2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

FCC/Top/Area Scan (51x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.028 mW/g


FCC/Top/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.621 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.029 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00655 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

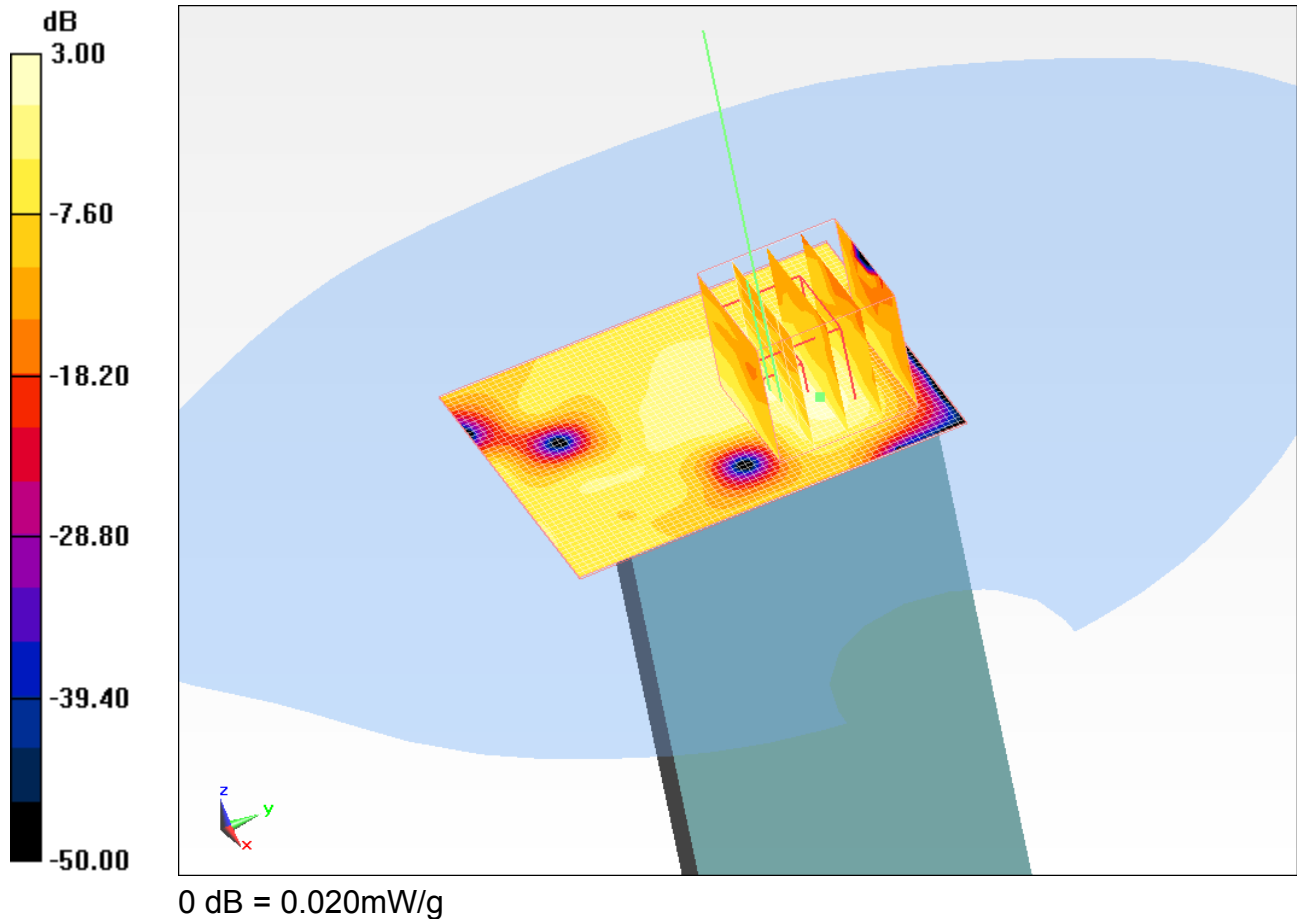

SCN/11U13867/045: Top 2_4GHz 802_11b (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Top/Area Scan (51x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.023 mW/g


FCC/Top/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.328 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00775 mW/g

Maximum value of SAR (measured) = 0.020 mW/g

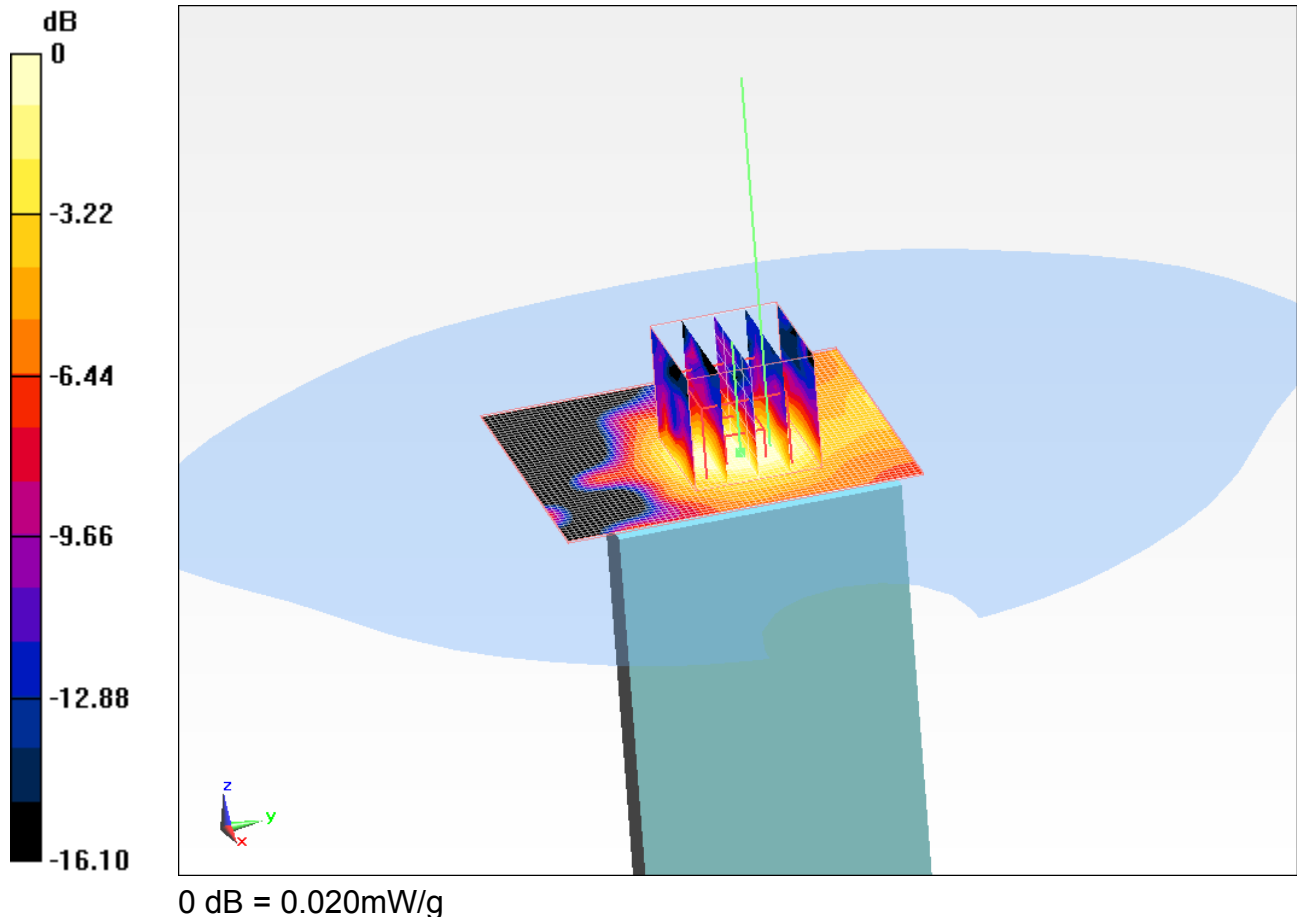

SCN/11U13867/046: Rear 2_4GHz 802_11b Wireless Charger Cover (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Rear/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.083 mW/g


FCC/Rear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.527 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

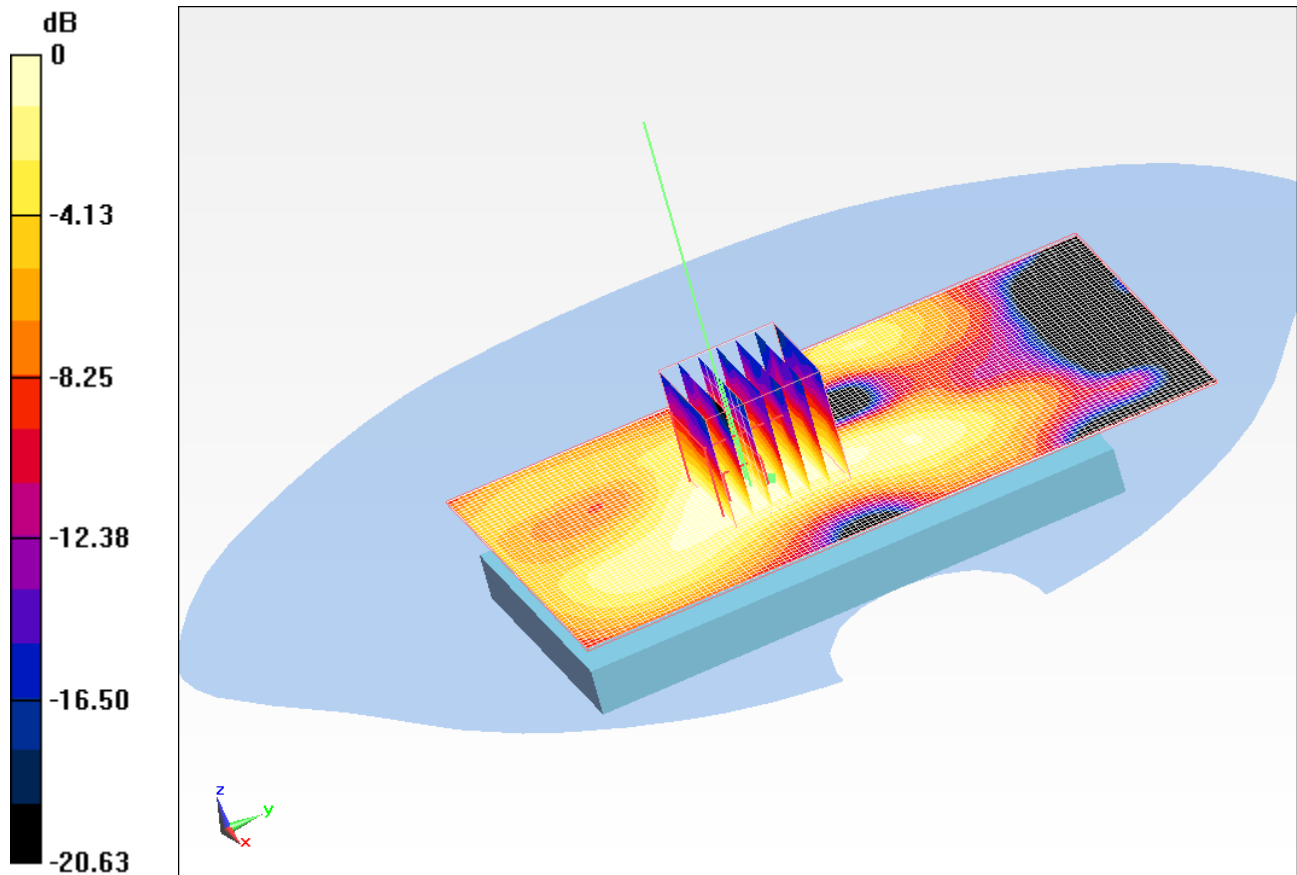

0 dB = 0.080mW/g

SCN/11U13867/047: Rear 2_4GHz 802_11b With Personal Hands Free (1Mbps) CH 6

Date: 6/24/2011

Test Laboratory: UL CCS SAR Lab A

Communication System: IEEE 802.11b WiFi 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.932$ mho/m; $\epsilon_r = 51.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: 1628
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

FCC/Rear with Personal Hands Free/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.091 mW/g

FCC/Rear with Personal Hands Free/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.036 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

