

RF EXPOSURE EVALUATION

Maximum Permissible Exposure (MPE)

Applicant Name:

LG Electronics Inc.
10, Magokjungang 10-ro, Gangseo-gu,
Seoul, Korea 07796

Date of Testing:

10/23/2017

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

1M1710200272-02.BEJ

FCC ID:	BEJWC500B15
APPLICANT:	LG Electronics Inc.

Application Type:	Certification
Operating Frequency:	145kHz
EUT Type:	Vehicle Installed Wireless Charging System
FCC Rule Part(s):	FCC Part 1 (§1.1310) and Part 2 (§2.1091)
FCC Classifications:	Part 15 Low Power Transmitter Below 1705 kHz (DCD)
Test Procedure:	KDB 680106 D01 v02

The device bearing the FCC Identifier specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in KDB 680106 D01 v02. These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President

FCC ID: BEJWC500B15	 PCTEST ENGINEERING LABORATORY, INC.	MAXIMUM PERMISSIBLE EXPOSURE (MPE) DATA REPORT	 LG	Reviewed by: Quality Manager
Test Report S/N: 1M1710200272-02.BEJ	Test Dates: 10/23/2017	EUT Type: Vehicle Installed Wireless Charging System	Page 1 of 7	

TABLE OF CONTENTS

1.0	RF EXPOSURE EVALUATION – MAXIMUM PERMISSIBLE EXPOSURE (MPE)	3
1.1	Introduction	3
1.2	EUT Description.....	3
1.3	MPE Requirements Overview.....	4
1.4	Test Equipment	5
1.5	Test Setup	5
1.6	Mobile Condition MPE	6
2.0	CONCLUSION	7

FCC ID: BEJWC500B15		MAXIMUM PERMISSIBLE EXPOSURE (MPE) DATA REPORT		Reviewed by: Quality Manager
Test Report S/N: 1M1710200272-02.BEJ	Test Dates: 10/23/2017	EUT Type: Vehicle Installed Wireless Charging System	Page 2 of 7	

1.0 RF EXPOSURE EVALUATION – MAXIMUM PERMISSIBLE EXPOSURE (MPE)

1.1 Introduction

This document is prepared on behalf of LG Electronics Inc. to show compliance with the RF Exposure requirements as required in §1.1310 of the FCC Rules and Regulations in the mobile two operating condition of the EUT. MPE testing was performed to demonstrate compliance with the MPE limits for the mobile use condition.

The limit for Maximum Permissible Exposure (MPE), specified in FCC §1.1310, is listed in Table 1-1. According to FCC §1.1310: the criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b).

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (Minutes)
(A) Limits For Occupational / Control Exposures (f = frequency)				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	...	...	f/300	6
1500-100,000	...	...	5.0	6
(B) Limits For General Population / Uncontrolled Exposure (f = frequency)				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	...	...	f/1500	30
1500-100,000	...	...	1.0	30

Table 1-1. Limits for Maximum Permissible Exposure (MPE)

Per the guidance of KDB 680106, the E-field and H-field limits shown in the table above are extended down to 100kHz.

1.2 EUT Description

The EUT consists of the LGE Vehicle Installed Wireless Charger System used with one dummy load that is representative of the WPC wireless charging protocol. Wireless power transfer is initiated when the dummy load is placed on the charger system.

Output power of the charging pad is 15W in WPC mode.

FCC ID: BEJWC500B15		MAXIMUM PERMISSIBLE EXPOSURE (MPE) DATA REPORT		Reviewed by: Quality Manager
Test Report S/N: 1M1710200272-02.BEJ	Test Dates: 10/23/2017	EUT Type: Vehicle Installed Wireless Charging System		Page 3 of 7

1.3 MPE Requirements Overview

Three different categories of transmitters are defined by the FCC in KDB 680106 D01 v02. These categories are fixed installation, mobile, and portable and are defined as follows:

- o **Fixed Installations:** fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o **Mobile Devices:** a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o **Portable Devices:** a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093).

The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:

- o **Occupational/Controlled Exposure:** In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
- o **General Population/Uncontrolled Exposure:** The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

The **LGE Vehicle Installed Wireless Charging System FCC ID: BEJWC500B15** is evaluated to the "General Population/Uncontrolled Exposure" limits for Mobile exposure condition as described in Section 1.1 above.

FCC ID: BEJWC500B15		MAXIMUM PERMISSIBLE EXPOSURE (MPE) DATA REPORT		Reviewed by: Quality Manager
Test Report S/N: 1M1710200272-02.BEJ	Test Dates: 10/23/2017	EUT Type: Vehicle Installed Wireless Charging System		Page 4 of 7

1.4 Test Equipment

Test equipment calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Narda	EHP-200AC	Electric & Magnetic Field Probe	4/18/2017	Annual	4/18/2018	170WX70211

Table 1-2. Test Equipment List

1.5 Test Setup

Maximum E-field and H-field measurements were made on each of five sides of the EUT that could come in contact with a user. The five sides are defined as follows: Top (A), Left (B), Bottom (C), Right (D), and Front (E). Refer to the test position diagram below.

Mobile Condition

Probe	Condition	Test Distance (cm)
E-field	Mobile	Variable
H-field	Mobile	Variable

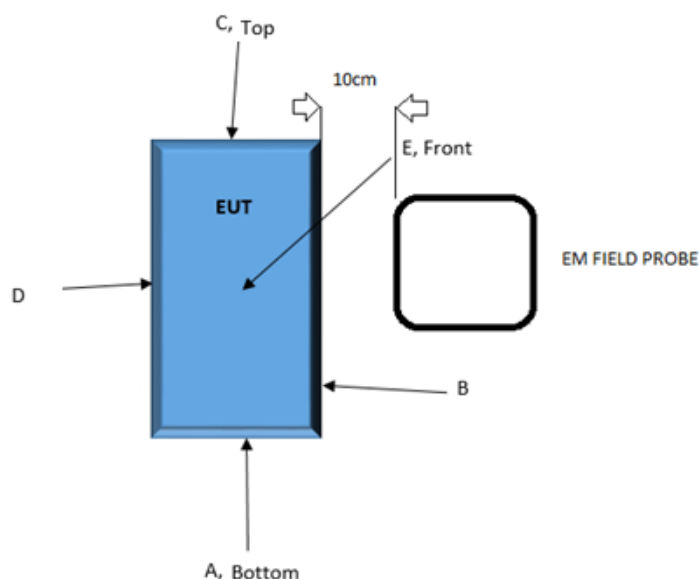


Figure 1. Test Positions and Probe Distance

FCC ID: BEJWC500B15	PCTEST ENGINEERING LABORATORY, INC.	MAXIMUM PERMISSIBLE EXPOSURE (MPE) DATA REPORT	LG	Reviewed by: Quality Manager
Test Report S/N: 1M1710200272-02.BEJ	Test Dates: 10/23/2017	EUT Type: Vehicle Installed Wireless Charging System		Page 5 of 7

1.6 Mobile Condition MPE

The procedure used to determine the RF power density for the mobile condition was based upon E-field and H-field measurements recorded using a calibrated probe. All measurements were recorded with the EUT (the charging system) transferring power to the Rx dummy loads that support the WPC charging protocols. The pad itself was running off of a 12VDC power supply.

The field strength of the E field and H-field was measured at an EUT-to-probe-measurement-axis distance as shown in Section 1.5 using the equipment listed in Section 1.4.

Care was exercised to ensure that the charging system was transferring power to the dummy loads throughout the duration of the field strength measurements.

During testing, the charging system with WPC dummy load was placed on a non-conductive (composite plastic) table top. The probe was positioned at the location where there is maximum field strength on each side of the EUT. The maximum E-field and H-field is reported below.

E Measurements (V/m)	Distance from probe (cm)						Limit (V/m)
	0	2	4	6	8	10	
A (Bottom)	17.963	7.563	3.640	3.310	2.278	1.832	614.00
B (Right)	22.812	8.313	5.297	3.453	2.817	1.924	614.00
C (Top)	33.440	12.141	6.282	4.276	2.898	2.120	614.00
D (Left)	24.328	7.859	4.125	3.234	1.984	1.563	614.00
E (Front)	34.281	22.671	14.156	7.859	5.453	3.922	614.00

Table 1-3. E-field Measurements for Decremental Test Distances (15W WPC)

H Measurements (A/m)	Distance from probe (cm)						Limit (A/m)
	0	2	4	6	8	10	
A (Bottom)	2.166	0.797	0.366	0.206	0.141	0.090	1.63
B (Right)	8.531	3.909	1.791	0.938	0.497	0.338	1.63
C (Top)	4.828	2.063	0.994	0.619	0.403	0.272	1.63
D (Left)	5.588	3.966	1.584	0.834	0.478	0.309	1.63
E (Front)	2.222	1.209	0.769	0.422	0.281	0.206	1.63

Table 1-4. H-field Measurements for Decremental Test Distances (15W WPC)

FCC ID: BEJWC500B15		MAXIMUM PERMISSIBLE EXPOSURE (MPE) DATA REPORT		Reviewed by: Quality Manager
Test Report S/N: 1M1710200272-02.BEJ	Test Dates: 10/23/2017	EUT Type: Vehicle Installed Wireless Charging System		Page 6 of 7

2.0 CONCLUSION

The E-field and H-field data shown in this report show that the Vehicle Installed Wireless Charger System is compliant with the MPE limits for the WPC charging dummy load at a distance of 6cm.

FCC ID: BEJWC500B15	 PCTEST ENGINEERING LABORATORY, INC.	MAXIMUM PERMISSIBLE EXPOSURE (MPE) DATA REPORT	 LG	Reviewed by: Quality Manager
Test Report S/N: 1M1710200272-02.BEJ	Test Dates: 10/23/2017	EUT Type: Vehicle Installed Wireless Charging System	Page 7 of 7	