

TABLE OF CONTENTS LIST

APPLICANT: AUDIOVOX CORP.

FCC ID: BGADF-205

TEST REPORT:

PAGE	1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....TECHNICAL DESCRIPTION CONTINUED & RF POWER OUTPUT
PAGE	3.....MODULATION CHARACTERISTICS AND OCCUPIED BANDWIDTH
PAGE	4.....METHOD OF MEASURING OCCUPIED BANDWIDTH
PAGE	5.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE	5.....FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	6.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	7.....FREQUENCY STABILITY
PAGE	8.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT	1.....FCC ID LABEL SAMPLE
EXHIBIT	2.....SKETCH OF FCC ID LABEL LOCATION
EXHIBIT	3A.....EXTERNAL PHOTO - FRONT VIEW
EXHIBIT	3B.....EXTERNAL PHOTO - REAR VIEW
EXHIBIT	3C.....INTERNAL PHOTO - SOLDER SIDE
EXHIBIT	3D.....INTERNAL PHOTO - COMPONENT SIDE
EXHIBIT	4.....BLOCK DIAGRAM
EXHIBIT	5A.....SCHEMATIC - RF
EXHIBIT	5B.....SCHEMATIC - LOGIC
EXHIBIT	6A-6F.....USER'S MANUAL
EXHIBIT	7A-7C.....THEORY OF OPERATION
EXHIBIT	8.....TUNING PROCEDURE
EXHIBIT	9.....LIST OF ACTIVE DEVICES
EXHIBIT	10.....AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT	11A.....MODULATION LIMITING PLOT - 300 Hz
EXHIBIT	11B.....MODULATION LIMITING PLOT - 1000 Hz
EXHIBIT	11C.....MODULATION LIMITING PLOT - 3000 Hz
EXHIBIT	12.....AUDIO LOW PASS FILTER GRAPH
EXHIBIT	13A.....OCCUPIED BANDWIDTH CW PLOT
EXHIBIT	13B.....OCCUPIED BANDWIDTH PLOT - 2500 Hz TONE

APPLICANT: AUDIOVOX CORP.

FCC ID: BGADF-205

REPORT #: T:\CUS\A\AUDIOVOX\247BK0\247BK0.RPT

PAGE: TABLE OF CONTENTS

2.1033(c)(1)(2) AUDIOVOX CORP. will manufacture the
FCCID: BGADF-205 FAMILY RADIO SERVICES 14 CHANNEL
TRANSCEIVER in quantity, for use under FCC RULES
PART 95.
AUDIOVOX CORP.
150 MARCUS BLVD.
HAUPPAUGE, NY 11787
USA

2.1033(c)(3) Instruction book. A draft copy of the instruction manual is included as EXHIBIT 6A-6F.

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 2.0K \\ B_n &= 2(3.0) + 2(2.0) = 10.0K \end{aligned}$$

2.1033(c)(5) Frequency Range: 1. 462.5625 8. 467.5625
95.627 2. 462.5875 9. 467.5875
3. 462.6125 10. 467.6125
4. 462.6375 11. 467.6375
5. 462.6625 12. 467.6625
6. 462.6875 13. 467.6875
7. 462.7125 14. 467.7125 MHz

95.645 The antenna is an intergral part to the unit, it cannot be removed without rendering the unit inoperative. In order to remove the antenna the case must unscrewed, then the PCB assemblies must be removed then the antenna can be removed.

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included 8.

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See Exhibit 10.

2.1047(b) Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. See Exhibit 11A-11C.

95.635(b) Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20KHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See Exhibit 12.

2.989(c) EMISSION BANDWIDTH:

95.633(b)(1)(3)(7)

Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least $43 + \log_{10}(TP)$. The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth PLOTS follow.

APPLICANT: AUDIOVOX CORP.

FCC ID: BGADF-205


REPORT #: T:\CUS\A\AUDIOVOX\247BK0\247BK0.RPT

PAGE #: 3

Radiotelephone transmitter with modulation limiter.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

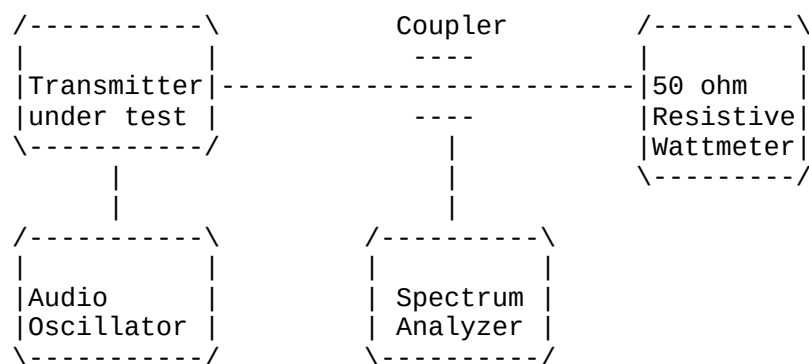

APPLICANT: AUDIOVOX CORP.
FCC ID: BGADF-205
REPORT #: T:\CUS\A\AUDIOVOX\247BK0\247BK0.RPT
PAGE #: 4

2.1051 Not Applicable, no antenna terminal
allowed.

2.1053 UNWANTED RADIATION:
95.635(b)(7)

REQUIREMENTS: Emissions must be attenuated by at least the
following below the output of the
transmitter.

$$43 + 10\log(TP) = 43 + 10\log(0.5) = 40.00\text{dB}$$

TEST DATA:

EMISSION FREQ. MHZ	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRNGTH dBuV/m	ATT. dBuV/m	MARGIN dB	ANT.
462.71	104.10	1.60	18.44	124.14	0.0	0.23	V
925.40	53.40	2.90	24.10	80.40	43.74	3.74	V
1388.10	44.30	1.00	25.55	70.85	53.29	13.29	V
1850.80	41.80	1.01	27.40	70.21	53.93	13.93	V
2313.50	37.50	1.08	28.78	67.36	56.78	16.78	V
2776.20	33.10	1.15	29.94	64.19	59.95	19.95	V
3239.00	36.10	1.22	31.10	68.41	55.73	15.73	V
3701.70	34.00	1.29	32.25	67.54	56.60	16.60	V
4164.40	32.00	1.36	33.18	66.54	57.60	17.60	H
4627.10	24.00	1.42	33.71	59.13	65.01	25.01	V

MARGIN = (Field strength of Fund - 40dB) - FS OF EMISSION

METHOD OF MEASUREMENT: The procedure used was C63.4-1992 for inten-
tional radiators. The spectrum was scanned from 30 to at least the
tenth harmonic of the fundamental using a HP model 8566B spectrum
analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics
antennas models TDA, TDS-25-1, TDS-25-2 and RGA-180. Measurements were
made at the open field test site of TIMCO ENGINEERING INC. located at
849 N.W. State Road 45, Newberry, FL 32669.

APPLICANT: AUDIOVOX CORP.
FCC ID: BGADF-205
REPORT #: T:\CUS\A\AUDIOVOX\247BK0\247BK0.RPT
PAGE #: 5


2.1053

UNWANTED_RADIATION:

95.631(b)(8)(9)

Method of Measuring Radiated Spurious Emissions

Hewlett Packard
Spectrum
Analyzer
HP8566B

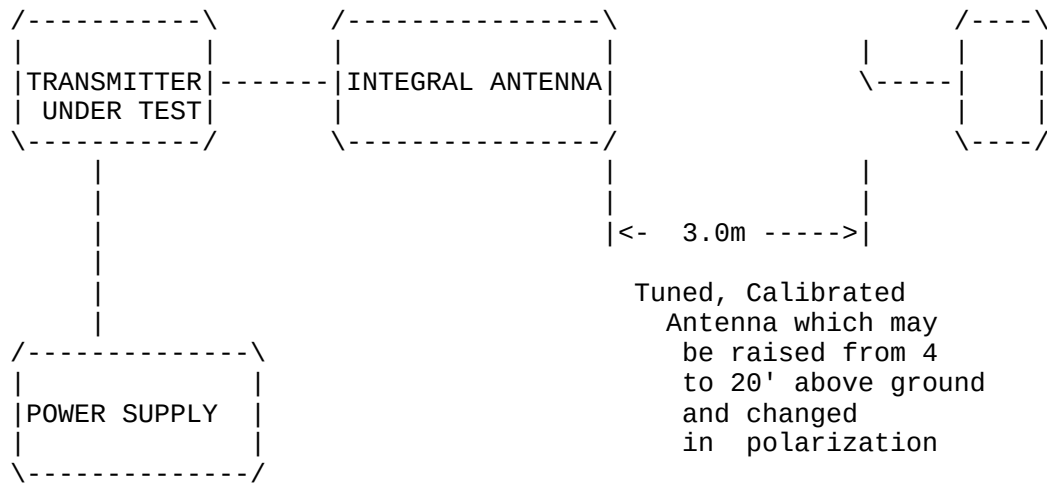

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: AUDIOVOX CORP.

FCC ID: BGADF-205

REPORT #: T:\CUS\A\AUDIOVOX\247BK0\247BK0.RPT

PAGE #: 6

2.1055 Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 4.5 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 467.612 500

TEMPERATURE°C	FREQUENCY_MHz	PPM
REFERENCE_____	467.612 500	00.00
-20_____	467.613 542	2.23
-10_____	467.612 991	1.05
0_____	467.613 360	+1.84
+10_____	467.613 192	+1.48
+20_____	467.611 761	-1.58
+30_____	467.611 943	-1.19
+40_____	467.611 401	-2.35
+50_____	467.611 354	-2.45
BATT. End-Point 5.1V/dc	467.611 742	-1.62
BATT. End-Point 6.9V/dc	467.611 704	-1.70

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -2.45 to +2.23 ppm. The maximum frequency variation with voltage was -1.70 ppm.

APPLICANT: AUDIOVOX CORP.

FCC ID: BGADF-205

REPORT #: T:\CUS\A\AUDIOVOX\247BK0\247BK0.RPT

PAGE #: 7

APPLICANT: AUDIOVOX CORP.

FCC ID: BGADF-205

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. Horn 40-60GHz: ATM Part #19-443-6R
8. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
9. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
10. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99
11. Peak Power Meter: HP Model 8900C, S/N 2131A00545
12. X Open Area Test Site #1-3meters Cal. 12/22/99
13. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
14. Signal Generator: HP 8614A, S/N 2015A07428
15. Passive Loop Antenna: EMC0 Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
16. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
17. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
18. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
19. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
20. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99

APPLICANT: AUDIOVOX CORP.

FCC ID: BGADF-205

REPORT #: T:\CUS\A\AUDIOVOX\247BK0\247BK0.RPT

PAGE #: 8