

# Intertek Testing Services

## *FCC Part 90 Certification*

Performed on the

**Remote Emergency Device**

**Model: RED**

**FCC ID: BIB54530001**

for

**Meteor Communications Corporation**

Date of Test: November 16, 1998

Job #: J98029181

Total No. of Pages Contained in this Report: 23

This report shall not be reproduced except in full, without written approval of Intertek Testing Services.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

The results contained in this report were derived from measurements performed on the identified test samples. Any implied performance of other samples on this report is dependent on the representative of the samples tested.



FCC Pt 90 cert, Rev. 8/98

**Table of Contents**

|            |                                                                 |           |
|------------|-----------------------------------------------------------------|-----------|
| <b>1.0</b> | <b>Introduction</b>                                             | <b>1</b>  |
|            | Test Summary                                                    | 1         |
| 1.2        | Product Description                                             | 2         |
| <b>2.0</b> | <b>RF Power Output</b>                                          | <b>3</b>  |
| 2.1        | Test Procedure                                                  | 3         |
| 2.2        | Test Equipment                                                  | 3         |
| 2.3        | Test Results                                                    | 3         |
| <b>3.0</b> | <b>Effective Radiated Power</b>                                 | <b>5</b>  |
| 3.1        | Test Procedure                                                  | 5         |
| 3.2        | Test Equipment                                                  | 5         |
| 3.3        | Test Results                                                    | 5         |
| <b>4.0</b> | <b>Occupied Bandwidth, Bandwidth Limitation, Emission masks</b> | <b>6</b>  |
| 4.1        | Test Procedure                                                  | 6         |
| 4.2        | Test Equipment                                                  | 6         |
| 4.3        | Test Results                                                    | 6         |
| <b>5.0</b> | <b>Out of Band Emissions at Antenna Terminals</b>               | <b>12</b> |
| 5.1        | Test Procedure                                                  | 12        |
| 5.2        | Test Equipment                                                  | 12        |
| 5.3        | Test Results                                                    | 12        |
| <b>6.0</b> | <b>Field Strength of Spurious Radiation</b>                     | <b>16</b> |
| 6.1        | Test Procedure                                                  | 16        |
| 6.2        | Test Equipment                                                  | 16        |
| 6.3        | Test Results                                                    | 17        |
| <b>7.0</b> | <b>Line Conducted Emissions</b>                                 | <b>19</b> |
| 7.1        | Test Procedure                                                  | 19        |
| 7.2        | Test Configuration Setup                                        | 19        |
| 7.3        | Test Results                                                    | 19        |
| <b>8.0</b> | <b>Frequency Stability vs Temperature</b>                       | <b>20</b> |
| 8.1        | Test Procedure                                                  | 20        |
| 8.2        | Test Equipment                                                  | 20        |
| 8.3        | Test Results                                                    | 20        |
| <b>9.0</b> | <b>Frequency Stability vs Voltage</b>                           | <b>21</b> |
| 9.1        | Test Procedure                                                  | 21        |
| 9.2        | Test Equipment                                                  | 21        |

|      |                                           |    |
|------|-------------------------------------------|----|
| 9.3  | Test Results .....                        | 21 |
| 10.0 | <b>Transient Frequency Behavior</b> ..... | 22 |
| 10.1 | Test Procedure .....                      | 22 |
| 10.2 | Test Result .....                         | 22 |
| 11.0 | <b>List of Exhibits</b> .....             | 23 |

## 1.0 Introduction

### 1.1 Test Summary

| FCC RULE                       | DESCRIPTION OF TEST                                      | RESULT | PAGE |
|--------------------------------|----------------------------------------------------------|--------|------|
| 2.985                          | RF Power Output                                          | Pass   | 3    |
| 2.989(I), 90.209(b)(5), 90.210 | Occupied Bandwidth, Bandwidth Limitation, Emission masks | Pass   | 4    |
| 2.991                          | Spurious emissions at antenna terminals                  | Pass   | 6    |
| 2.993, 15.109                  | Field Strength of Spurious Radiation                     | Pass   | 7    |
| 15.107                         | Line Conducted Emissions                                 | N/A    | 13   |
| 2.995(a)                       | Frequency Stability vs. Temperature                      | Pass   | 14   |
| 2.995(d)(1)                    | Frequency Stability vs. Voltage                          | Pass   | 15   |
| 2.914                          | Transient frequency behavior                             | N/A    | 17   |

**Tested By:**



Cleveland Kwan  
Test Engineer

1/22/99

Date

**Approved By:**



David Chernomordik  
EMC Site Manager

1/22/99

Date

## 1.2 Product Description

The Meteor Communications Corporation is a Remote Emergency Transmitter. For more details see the information below and user manual.

|                                                                                                   |                                                                                        |
|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Applicant and Mailing Address                                                                     | Meteor Communications Corporation<br>8631 South 212th Street<br>Kent, Washington 98031 |
| Manufacturer and Mailing Address                                                                  |                                                                                        |
| FCC ID                                                                                            | BIB54530001                                                                            |
| Use of Product                                                                                    | Perosonal Emergency-Signaling Device                                                   |
| Whether quantity (>1) production is planned                                                       | <input checked="" type="checkbox"/> Yes, <input type="checkbox"/> No                   |
| Type(s) of Emission                                                                               | 16K0G1WWN                                                                              |
| Max. Allowed Modulation                                                                           | 2.0 kHz                                                                                |
| Type of Modulation                                                                                | BPSK                                                                                   |
| Range of RF Output                                                                                | 250 mW                                                                                 |
| Means for variation of operating power, if any                                                    | N/A                                                                                    |
| The dc voltage applied to and current into the several elements of the final RF amplifying device | Voltage: 9V<br>Current: 0.25                                                           |
| Frequency Range                                                                                   | 36 - 50 MHz                                                                            |
| Max. number of Channels                                                                           | 1                                                                                      |
| Antenna(e) & Gain                                                                                 | Loop, - 36 dBd                                                                         |
| Detachable antenna ?                                                                              | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No                    |
| Receiver L.O. frequency                                                                           | N/A                                                                                    |
| External input                                                                                    | <input type="checkbox"/> Audio <input checked="" type="checkbox"/> Digital Data        |

## **2.0 RF Power Output, FCC §2.985(a), §90.205**

### **2.1 Test Procedure**

The transmitter output was connected to a calibrated coaxial attenuator, the other end of which was connected to a spectrum analyzer. The resolution bandwidth and the video bandwidth of the spectrum analyzer were set up to 100 kHz and 30 kHz respectively. The attenuator was included in spectrum analyzer OFFSET function.


Transmitter output was read off the spectrum analyzer.

### **2.2 Test Equipment**

Hewlett Packard 8481A Power Sensor, 435B Power Meter  
Hewlett Packard HP8566B Spectrum Analyzer, 100 Hz - 22 GHz  
Tektronix 2782 Spectrum Analyzer, 100 Hz - 40 GHz

### **2.3 Test Results**

The EUT passed the test, refer to the attached plot #2.1

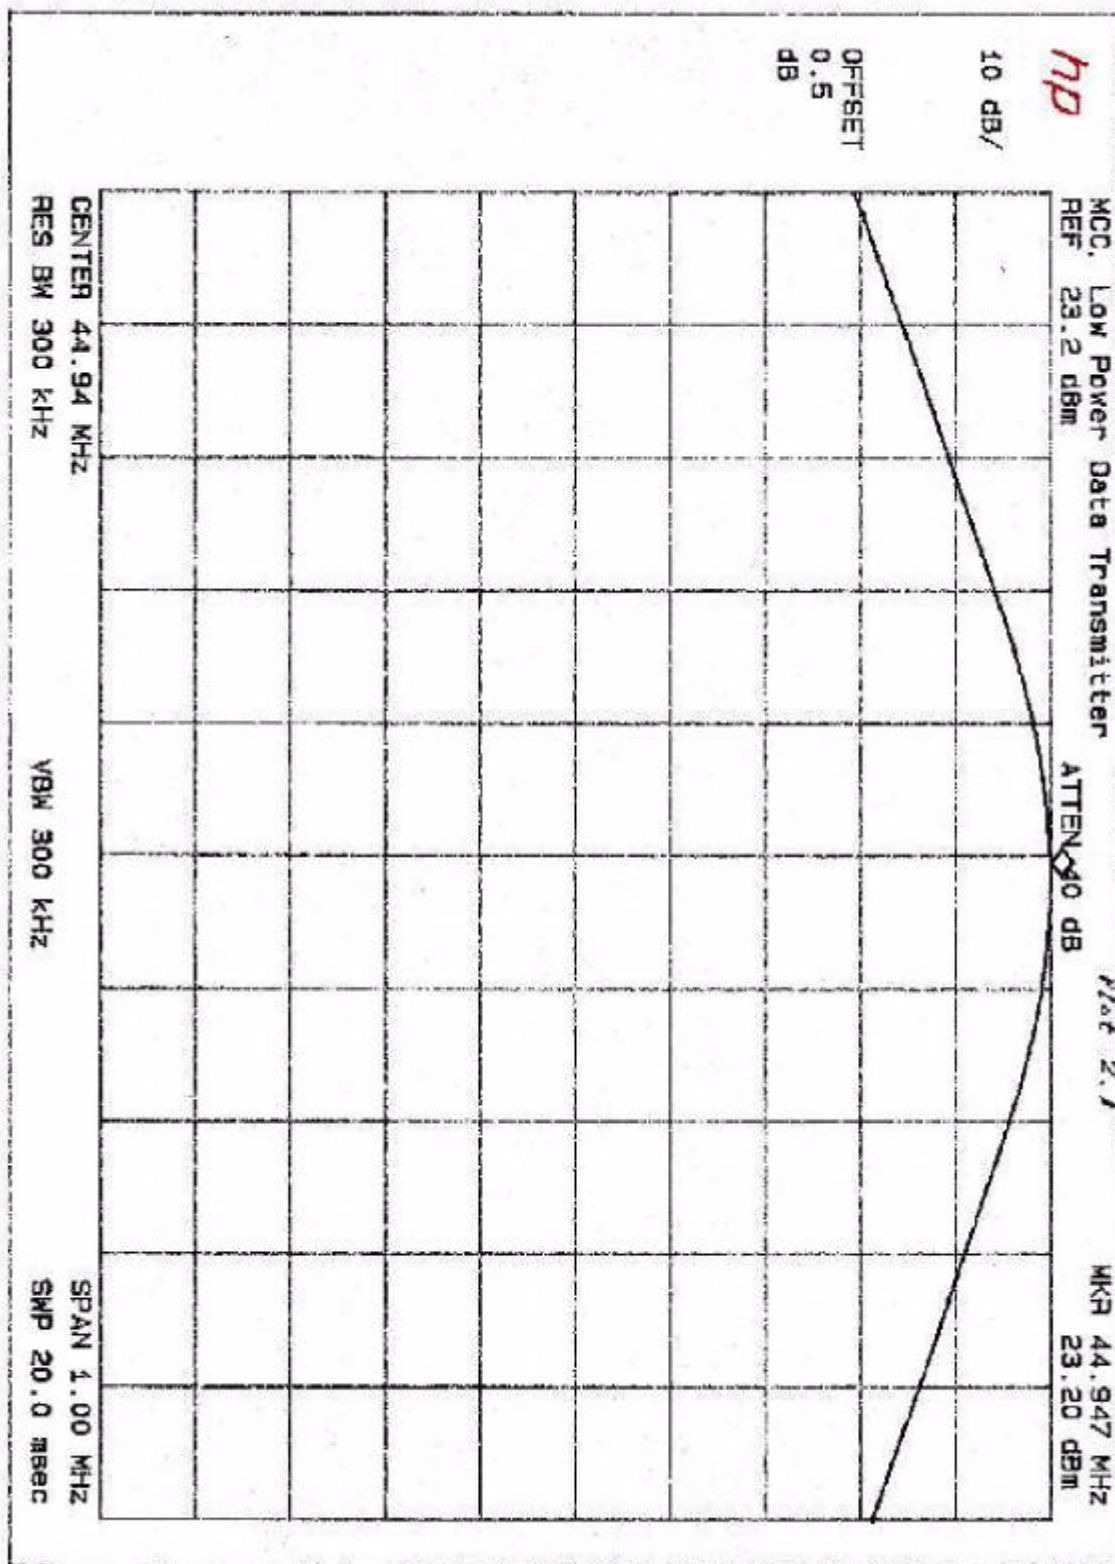

### 3.0 **Effective Radiated Power, FCC § 90.205**

#### 3.1 Test Procedure

The EUT was positioned on a non-conductive turntable, 0.8m above the ground plane on an open test site.

The radiated emission at the fundamental frequency was measured at 3m distance with a test antenna and spectrum analyzer. During the measurement, the resolution and video bandwidth of the spectrum analyzer were set to 100 kHz. The maximum emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna. The spectrum analyzer reading was recorded.

The ERP was calculated as follows:

$$\text{ERP}_{(\text{dBm})} = E_{(\text{dBuV/m})} + 20 \log D - 10 \log 30 - 10 \log G - 90$$

where D = 3m, distance

G = 1.64, gain of half-wave dipole

#### 3.2 Test Equipment

Hewlett Packard HP8566B Spectrum Analyzer  
CDI Biconical Antenna

#### 3.3 Test Results

The ERP was found as -34.1 dBm

## **4.0 Occupied Bandwidth, Bandwidth Limitation, Emission masks. FCC §2.989(I), 90.209(b)(5), 90.210**

### **4.1 Test Procedure**

The antenna was disconnected from the transmitter and the short cable was connected to a spectrum analyzer. The resolution bandwidth and the video bandwidth of the spectrum analyzer were set up to 300 kHz respectively.

The resolution bandwidth of the spectrum analyzer was set up at least 10 times higher than the authorized bandwidth of the transmitter. The spectrum analyzer reading was recorded and plotted. This reading is used as a reference for emission mask measurements.

The resolution bandwidth of the spectrum analyzer was set up to 100 Hz and the spectrum of the transmitting signal was recorded. This spectrum was compared to the required emission mask. The emission designator was defined as 16K0G1WWN.

### **4.2 Test Equipment**

HP 8566B Spectrum Analyzer, 100 Hz - 22 GHz  
HP 7470A Plotter


### **4.3 Test Results**


The EUT meets the requirements for the emission mask C - 20 kHz channel bandwidth equipment.


Refer to the attached plots 4.2 - 4.5.


Emission Limitations, Occupied Bandwidth Plots

| Plot Number | Description                      |
|-------------|----------------------------------|
| 4.2         | Occupied bandwidth, scan 50 kHz  |
| 4.3         | Occupied bandwidth, scan 100 kHz |
| 4.4         | Occupied bandwidth, scan 200 kHz |
| 4.5         | Occupied bandwidth, scan 1 MHz   |

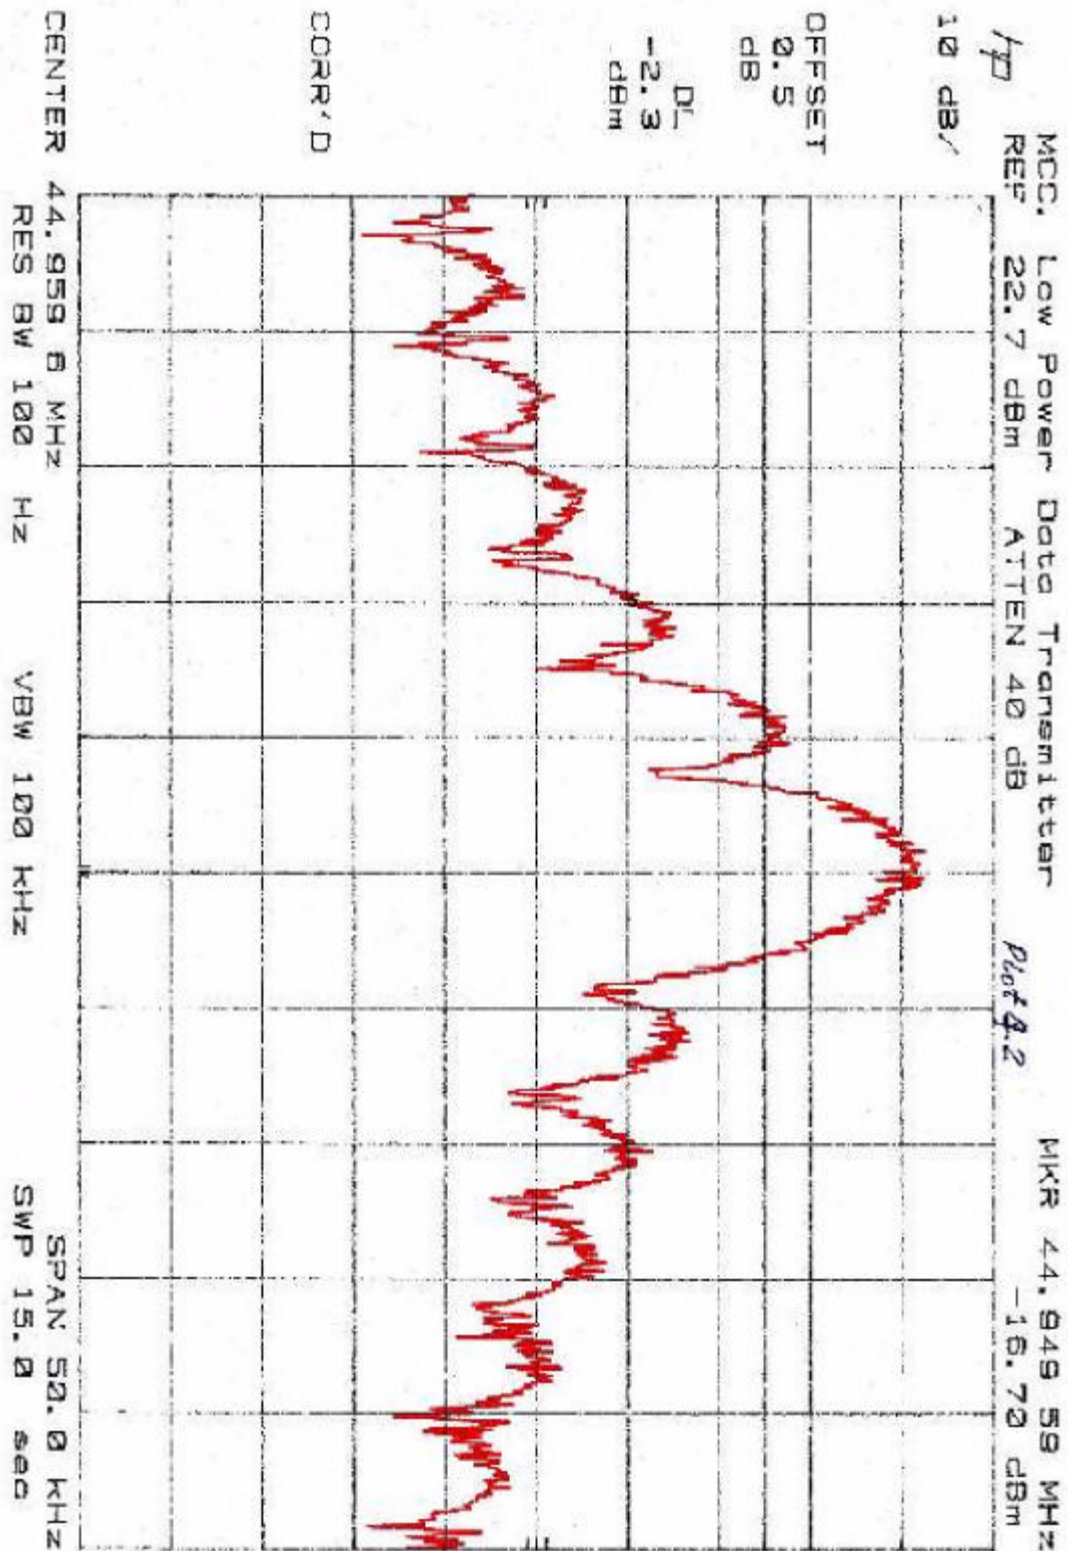

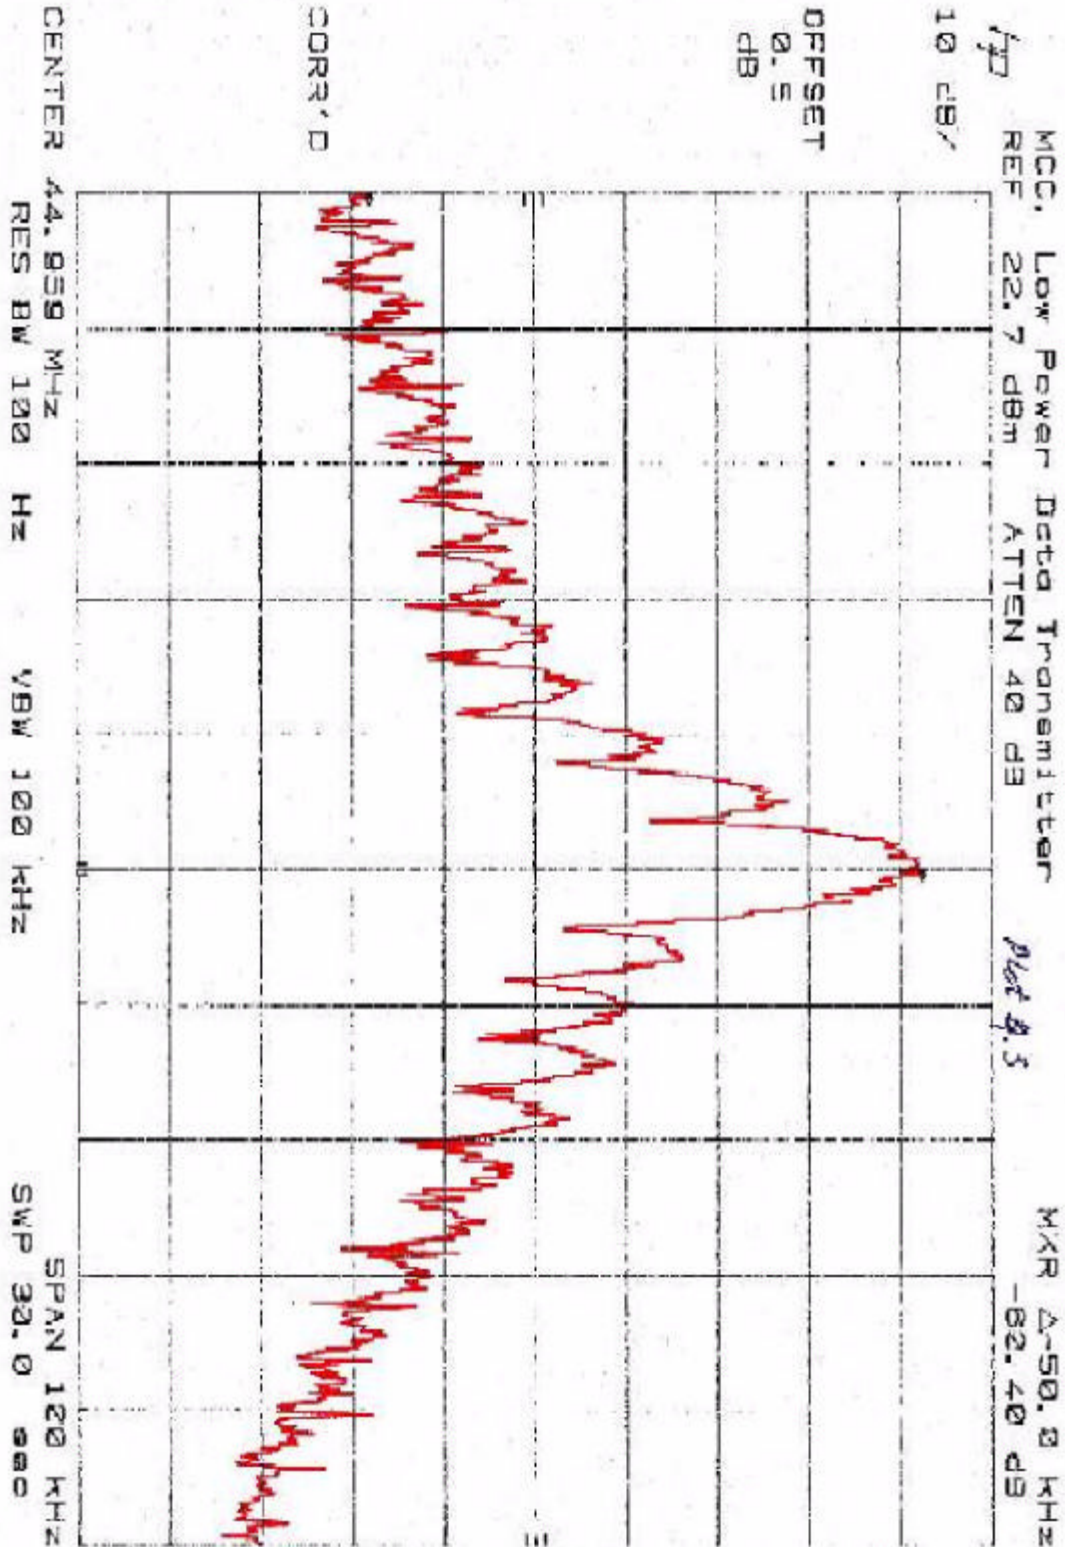

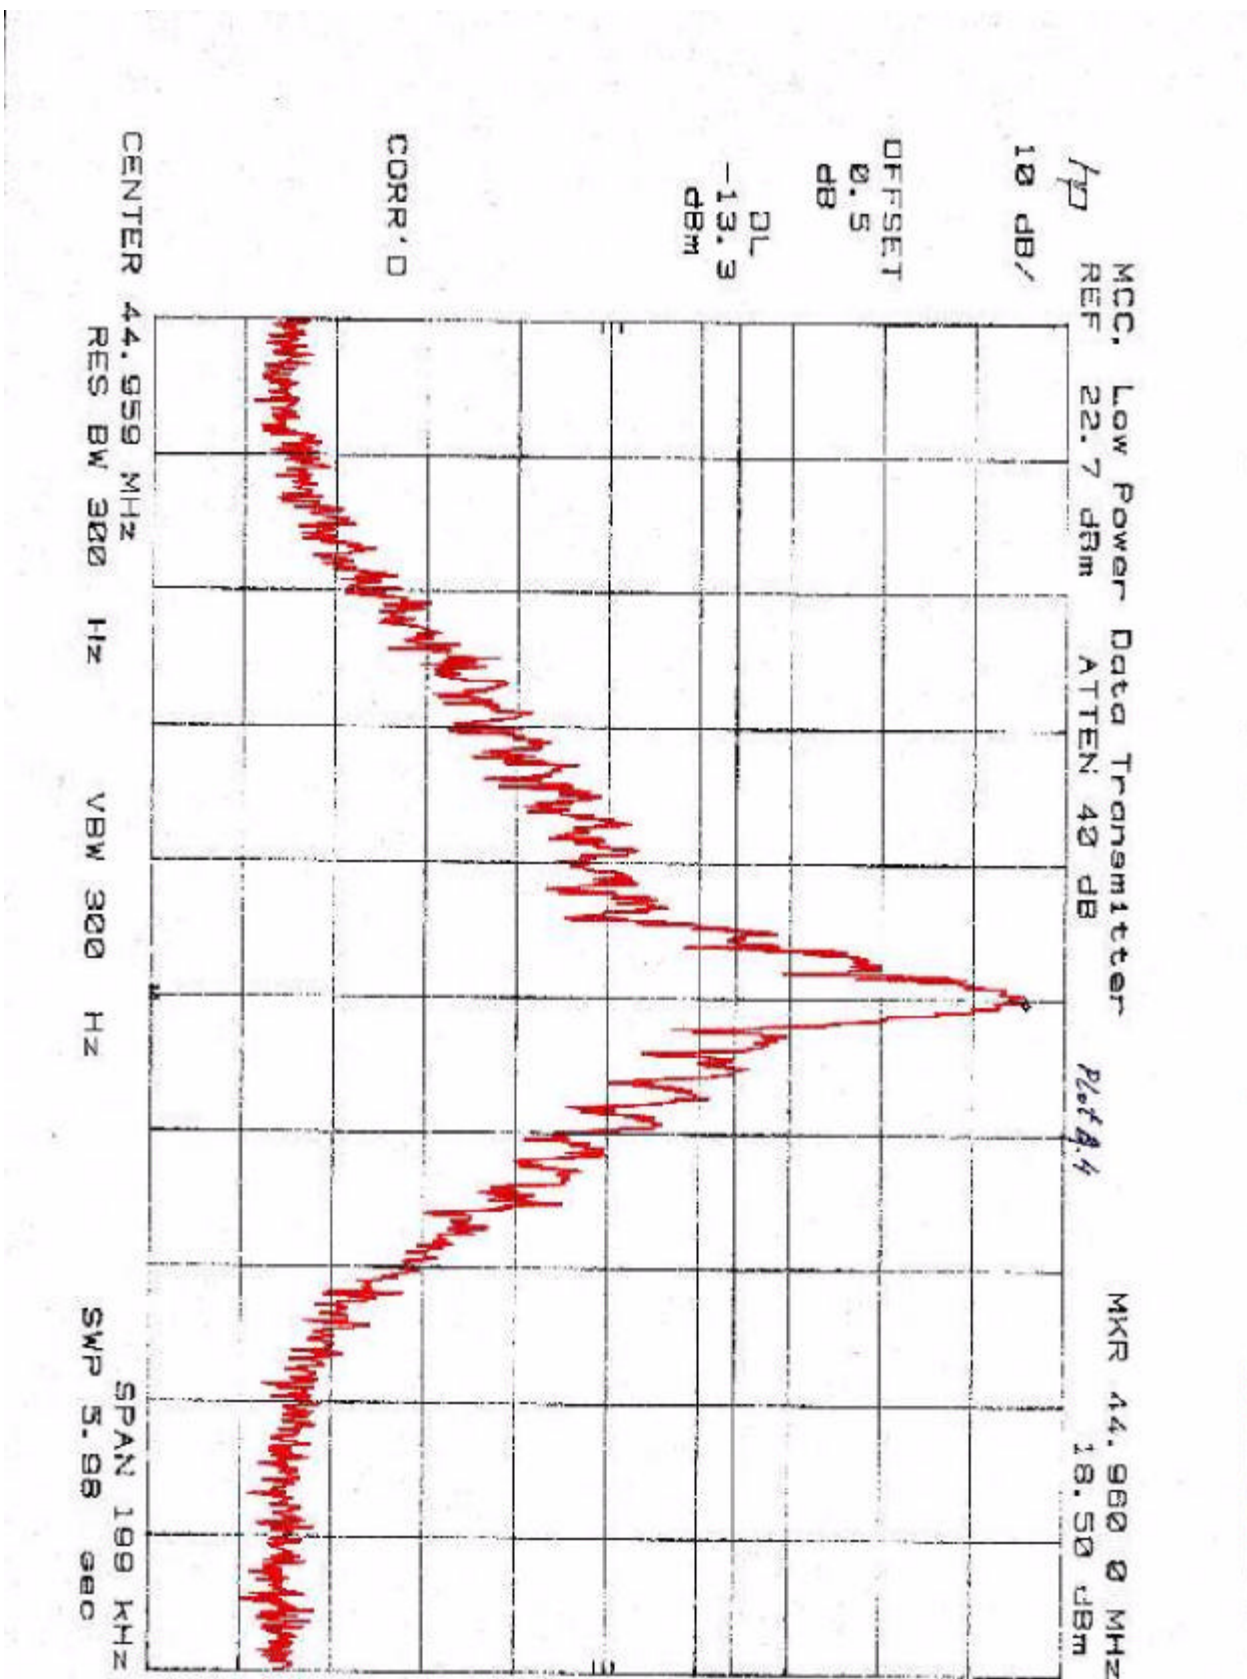

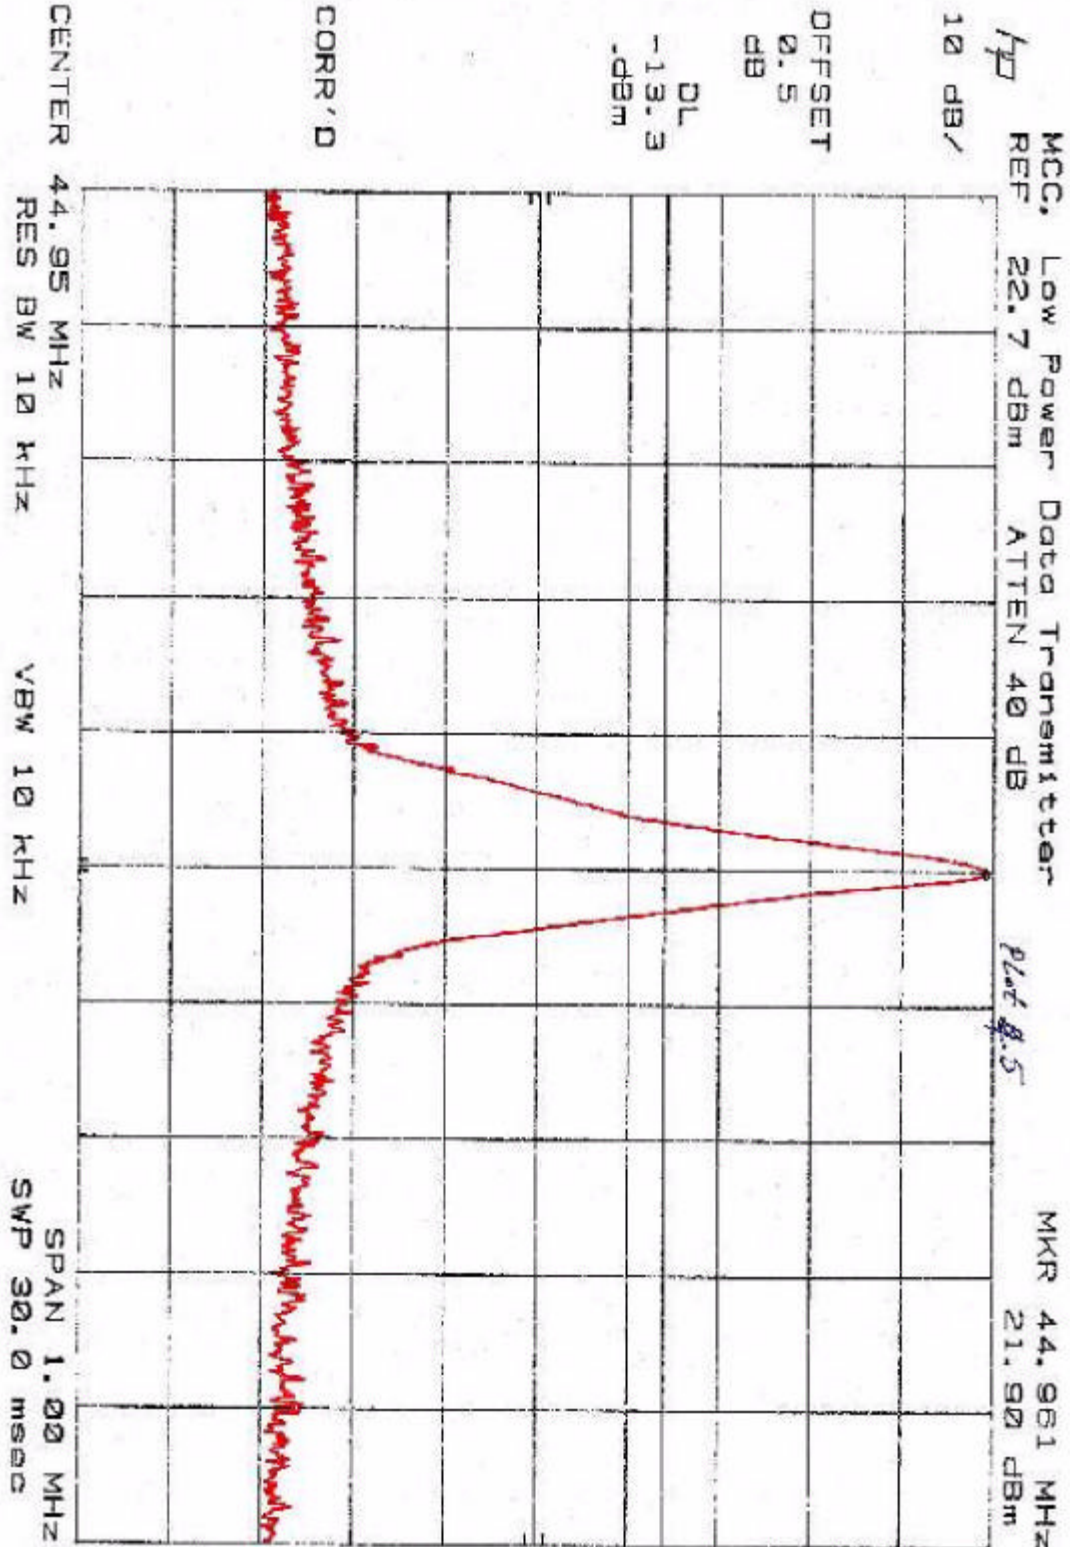

**5.0 Out of Band Emissions at Antenna Terminals , FCC §2.991**Out of Band Emissions:

The power of emissions must be attenuated below the power of the unmodulated carrier (P) on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth - at least  $43 + 10 \log P$  dB.

**5.1 Test Procedure**

The antenna was disconnected from the transmitter. The transmitter output was connected to a spectrum analyzer. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show the out-of- band emissions if any up to 10th harmonic.


**5.2 Test Equipment**


HP 8566B Spectrum Analyzer, 100 Hz - 22 GHz  
HP 7470A Plotter


**5.3 Test Results**

The EUT passed the test, refer to the attached plots.

| Plot Number | Description   |
|-------------|---------------|
| 5.1         | 1 - 100 MHz   |
| 5.2         | 100 - 500 MHz |
| 5.3         | 0.5 - 1 GHz   |

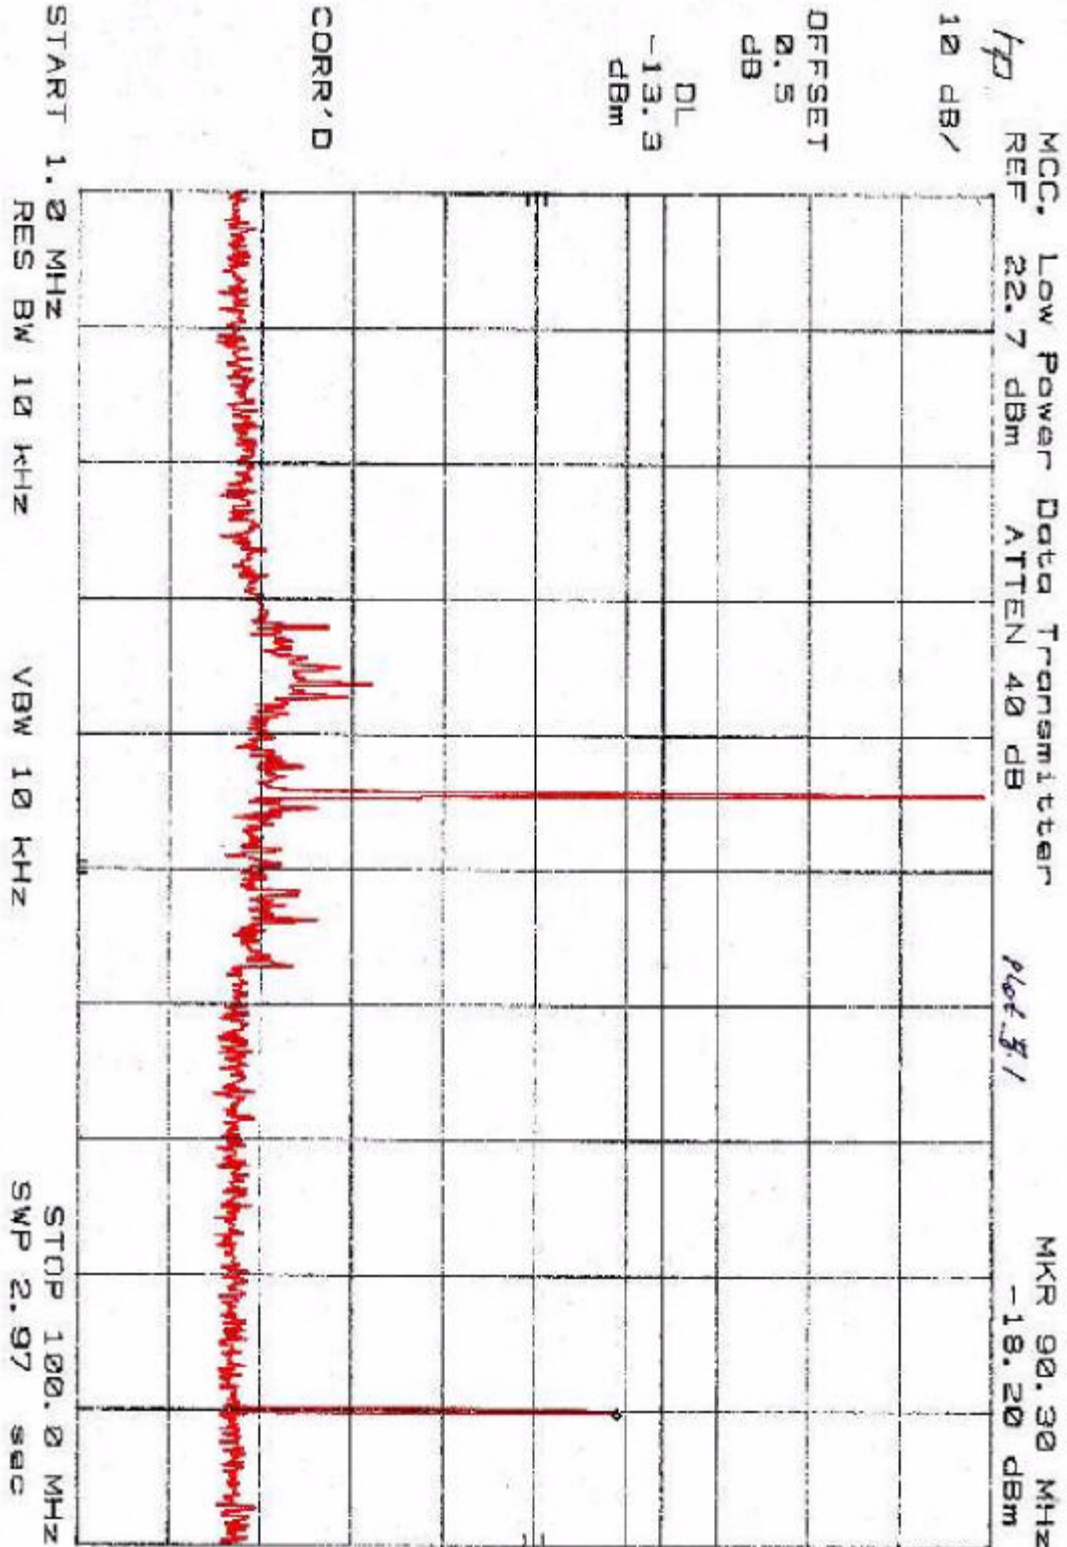

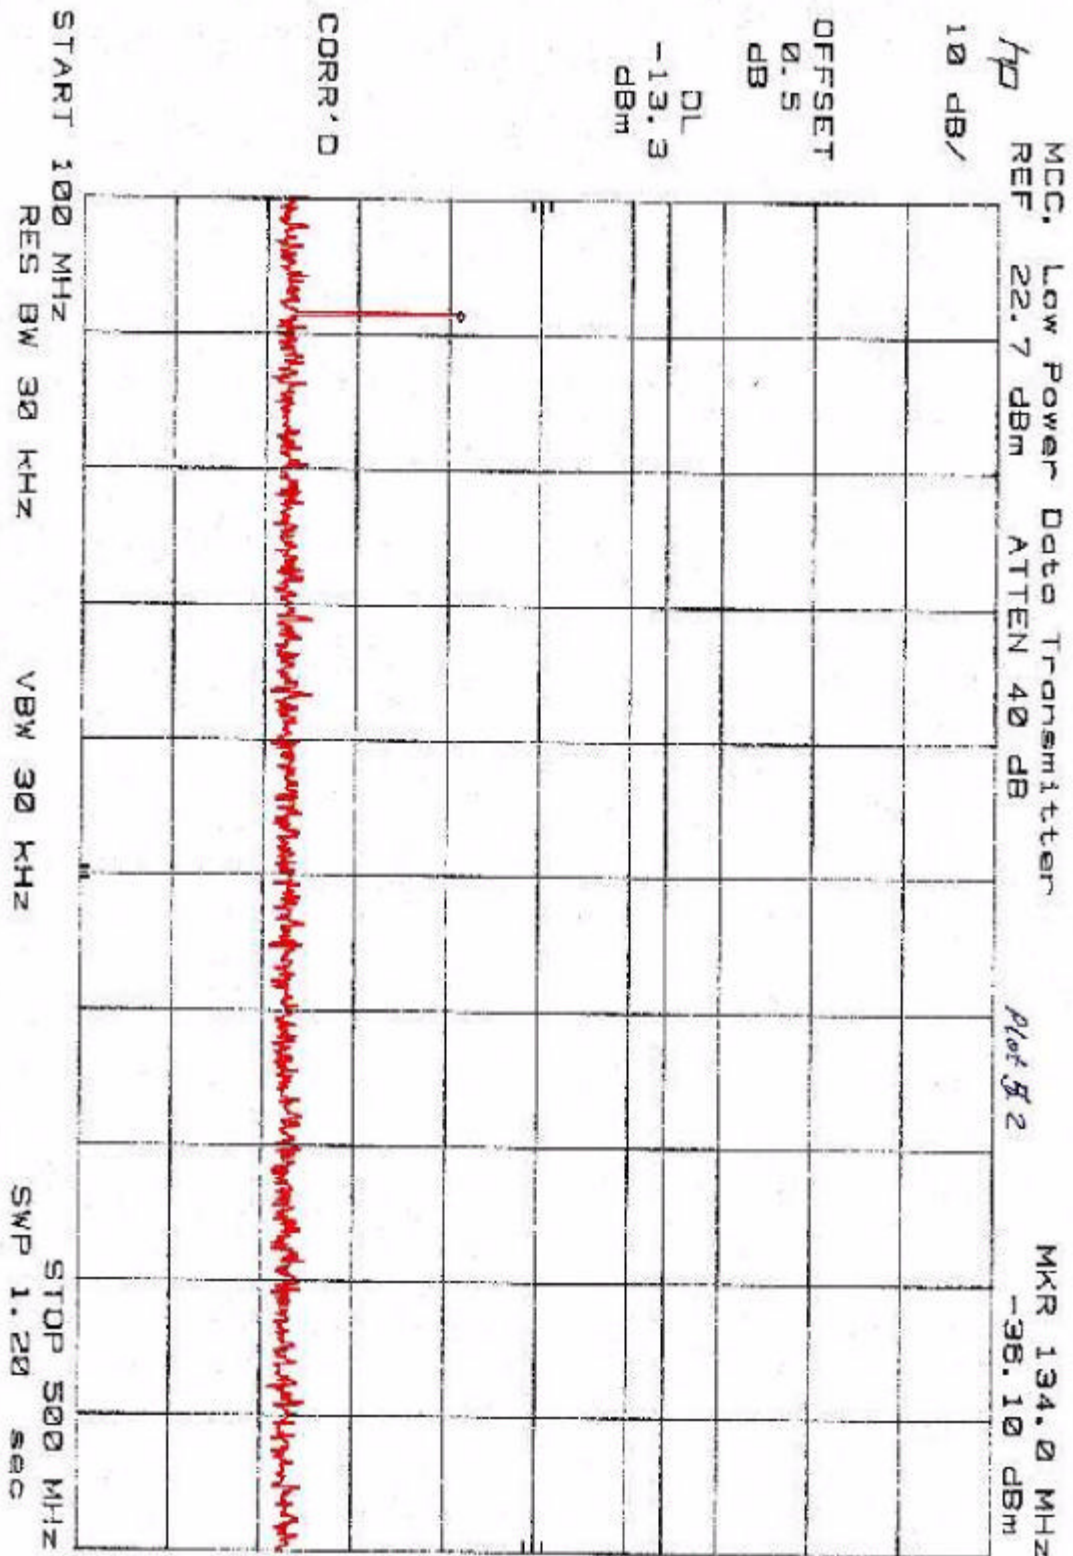

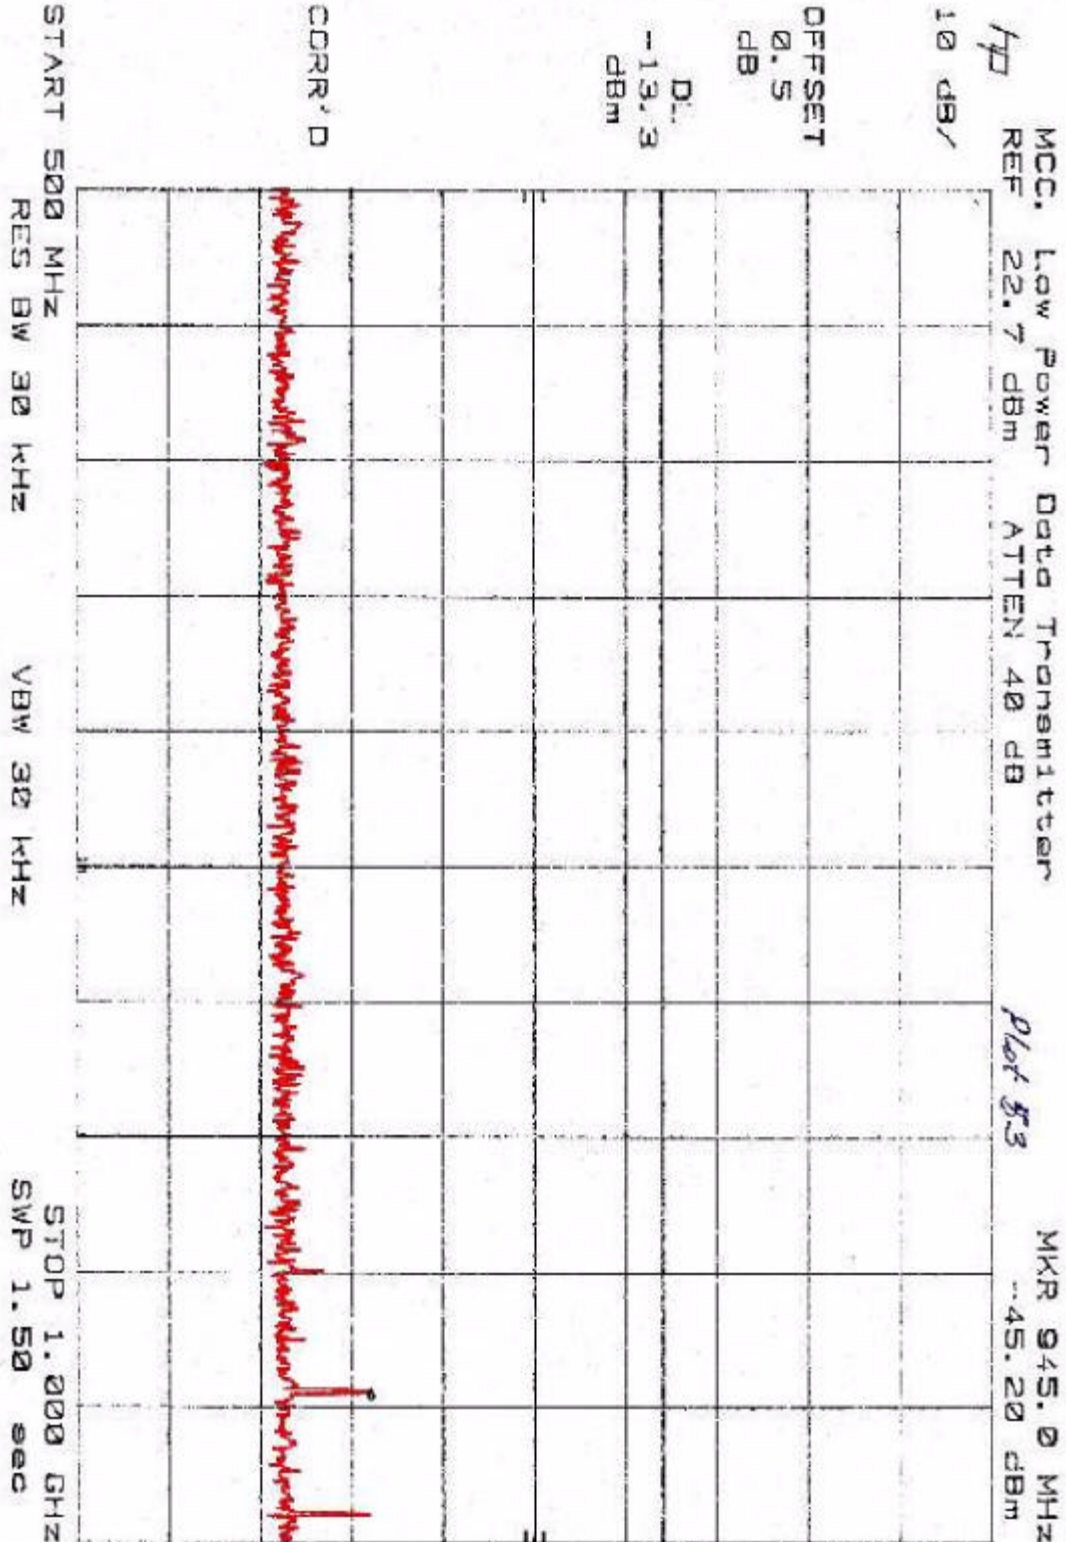

**6.0 Field Strength of Spurious Radiation, FCC § 2.993, §15.109****6.1 Test Procedure**

The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3 orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

The spurious harmonic attenuation was calculated as the difference between E in dB(uV/m) at the fundamental frequency and at the spurious emission frequency.

Note: Since the EUT's antenna is non-detachable and the EIRP is very low (-32 dBm), the limit for spurious radiation is defined as  $43 + 10 \log (EIRP)$  dB, In this case the limit is 0 dB

**6.2 Test Equipment**

EMCO 3143 Bi-log Antenna  
HP 8566B Spectrum Analyzer  
CDI P-950 Preamplifier

**6.3 Test Results****Spurious Harmonic Attenuation**

Test Site: #1

Test Engineer: C. Kwan

Operation Mode: Continuously transmitting at 44.96 MHz

| Frequency<br>MHz | Antenna<br>Pol. | SA<br>Reading<br>dB(uV) | Antenna<br>Factor<br>dB (1/m) | Pre-amp.<br>Correct.<br>dB | Cable<br>loss<br>dB | Distance<br>Correct.<br>dB | Field<br>Strength<br>dB(uV/m) | Spurious<br>attenuat.<br>dB |
|------------------|-----------------|-------------------------|-------------------------------|----------------------------|---------------------|----------------------------|-------------------------------|-----------------------------|
| 45.0             | V               | 53.3                    | 10.0                          | 0                          | 0                   | 0                          | 63.3                          | -                           |
| 90.0             | V               | 33.8                    | 6.5                           | 0                          | 0                   | 0                          | 40.3                          | 20.0                        |
| 135.0            | V               | 28.6                    | 7.8                           | 0                          | 0.2                 | 0                          | 36.6                          | 26.6                        |
| 180.0            | V               | 32.8                    | 8.5                           | 0                          | 0.3                 | 0                          | 41.6                          | 21.1                        |
| 225.0            | V               | 25.0                    | 10.6                          | 0                          | 0.6                 | 0                          | 36.2                          | 27.1                        |
| 270.0            | V               | 12.3                    | 11.6                          | 0                          | 0.7                 | 0                          | 24.6                          | 38.7                        |
| 315.0            | V               | 12.3                    | 12.8                          | 0                          | 0.8                 | 0                          | 25.9                          | 37.4                        |
| 360.0            | V               | 14.5                    | 14.1                          | 0                          | 1.0                 | 0                          | 29.6                          | 33.7                        |
| 405.0            | V               | 13.9                    | 14.8                          | 0                          | 1.2                 | 0                          | 29.9                          | 33.4                        |
| 450.0            | V               | 15.9                    | 15.6                          | 0                          | 1.4                 | 0                          | 32.9                          | 30.4                        |

**RESULT****Passed**

**FCC Part 15.109 Radiated Emission**

Test site: #1

Test Engineer: D. Chernomordik

Operation Mode: Continuously transmitting at 44.96 MHz.

| Frequency<br>MHz                                                                                                            | Antenna<br>Pol. | SA<br>Reading<br>dB(uV) | Antenna<br>Factor<br>dB(1/m) | Pre-amp.<br>Correct.<br>dB | Cable<br>loss<br>dB | Field<br>Strength<br>dB(uV/m) | Limit<br>dB(uV/m) | Margin<br>dB |
|-----------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------|------------------------------|----------------------------|---------------------|-------------------------------|-------------------|--------------|
| No emissions, except harmonics of transmitter, were detected above the noise floor, which is at least 20 dB below the limit |                 |                         |                              |                            |                     |                               |                   |              |

Note: All measurements were made at 3 m distance.

Frequency range investigated is from 30 to 1000 MHz.

**7.0 Line Conducted Emissions, FCC § 15.107**

**7.1 Test Procedure**

Test procedure described in the ANSI C63.4 Standard was employed.

The EUT was connected to the DC power supply, that was connected to the AC line through the LISNs.

Both HOT and NEUTRAL leads were tested.

**7.2 Test Configuration Setup - Line Conducted Emissions**

Not applicable, the EUT is battery powered only.

**7.3 Test Results**

Not applicable, the EUT is battery powered only.

**8.0 Frequency Stability vs Temperature, FCC § 2.995(a), § 90.213****8.1 Test Procedure**

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feedthrough attenuators. The EUT was placed inside the temperature chamber. The DC leads, RF output cable, exited the chamber through an opening

After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

**8.2 Test Equipment**

Temperature Chamber, -50C to +100C  
Hewlett Packard 5383A Frequency Counter  
Goldstar DC Power Supply, GR303

**8.3 Test Results**

The EUT passed the test, refer to the test data below.

| Frequency (MHZ): 44.96 |                 | Tolerance: 50 ppm, 2300 Hz |
|------------------------|-----------------|----------------------------|
| Temperature, C         | Frequency (MHz) | Difference (Hz)            |
| +50                    | 44.959013       | -987                       |
| +40                    | 44.959083       | -917                       |
| +30                    | 44.959048       | -952                       |
| +20                    | 44.959273       | -727                       |
| +10                    | 44.959550       | -450                       |
| 0                      | 44.959230       | -770                       |
| -10                    | 44.959490       | -510                       |
| -20                    | 44.959111       | -889                       |
| -30                    | 44.959150       | -850                       |

**9.0 Frequency Stability vs Voltage, FCC 2.995(d)(2), § 90.213****9.1 Test Procedure**

An external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115% of the DC nominal value and for 85% of the nominal value.

**9.2 Test Equipment**

Hewlett Packard 5383A Frequency Counter  
Tektronix 2784 Spectrum Analyzer  
Goldstar DC Power Supply, GR303

**9.3 Test Results.**

The EUT passed the test, refer to the test data below.

| Frequency (MHZ): 44.96 |                 | Tolerance: 50 ppm, 2300 Hz |
|------------------------|-----------------|----------------------------|
| Voltage, V             | Frequency (MHz) | Difference (Hz)            |
| 10.35                  | 44.959048       | -952                       |
| 9.0                    | 44.959046       | -954                       |
| 7.65                   | 44.959047       | -953                       |

## **10.0 Transient Frequency Behavior, FCC 90.214**

### **10.1 Test Procedure**

Test was performed according the TIA/EIA/IS-102.CAAA, Section 2.2.18. The transmitter was continuously transmitting a modulated signal (FSK, 2400 bits/sec.). The generator was generating FM signal (1 kHz tone, 12.5 kHz deviation). Several plots were made on the FM demodulator output with the EUT turned ON and OFF.

### **10.2 Test Result**

This test is not applicable.

## **11.0 List of Exhibits**

The following exhibits were submitted as separate attachments:

1. Authorization Letter - See Cover Letters
2. ID Label Format - Page 17 of Meteor's manual
3. ID Label Location - Page 18 of Meteor's manual
4. Equipment Photographs - EUT1, EUT2, EUT3, EUT4
5. Block Diagram - See Page 5 of Meteor's manual
6. Circuit Diagram - See Page 11 of Meteor's manual
7. Theory of Operation - See Page 5 of Meteor's manual
8. Test Setup Photo - Photo 2
9. Antenna Information - Page 12 & 13 of Meteor's manual
10. Instruction Manual - See attached Meteor's manual