9309丝印效果图

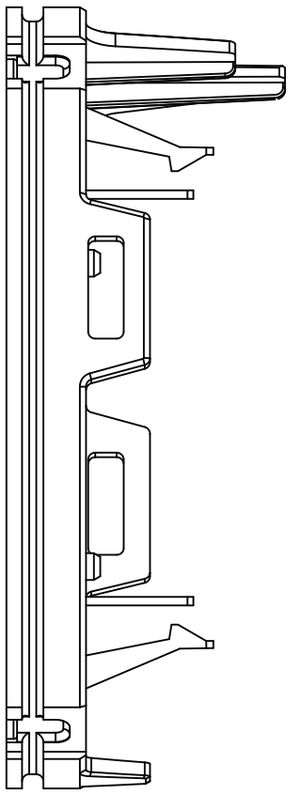

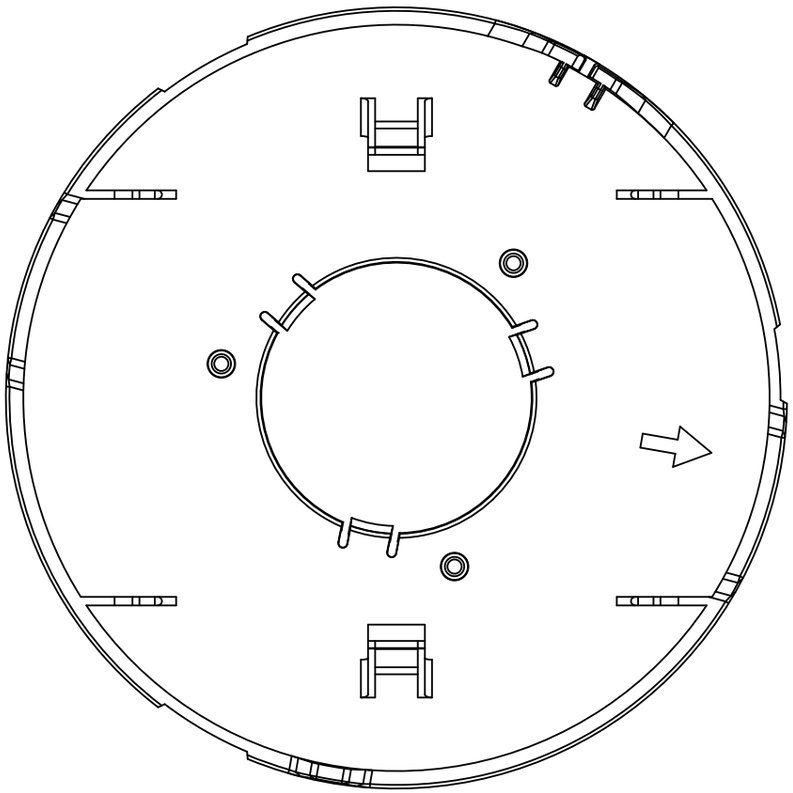

两虚线间为印刷内容
(两红色实线为产品进胶点)

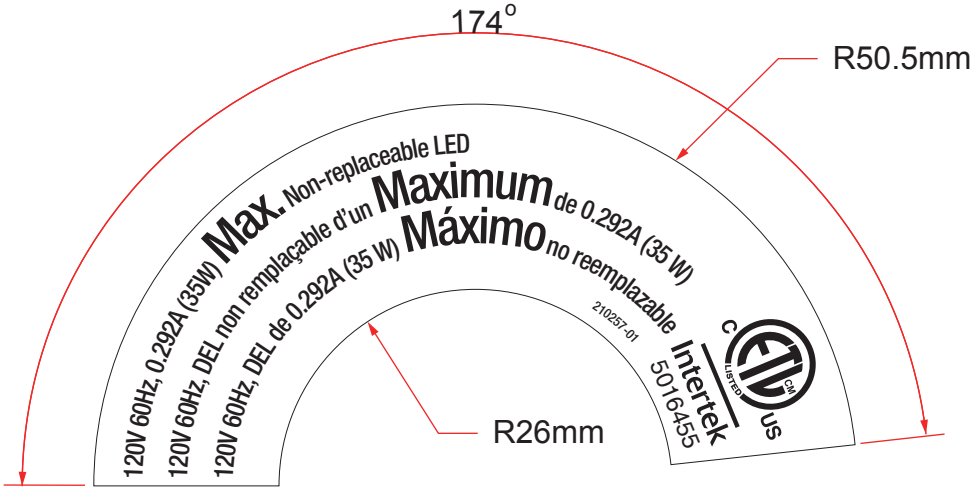
174°
R50.5mm
R26mm
Max. Non-replaceable LED
120V 60Hz, 0.292A (35W)
Maximum de 0.292A (35 W)
120V 60Hz, DEL non remplaçable d'un
Máximo no reemplazable
120V 60Hz, DEL de 0.292A (35 W)
210257-01
Intertek
5016455
C
US
LISTED

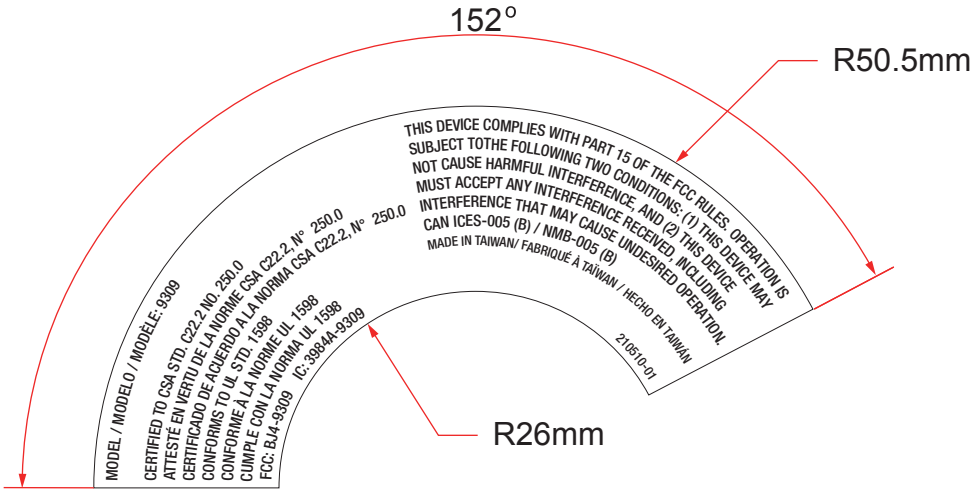
152°
R50.5mm
R26mm
THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TOTHE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.
CAN ICES-005 (B) / NMB-005 (B)
MADE IN TAIWAN/ FABRIQUÉ À TAÏWAN / HECHO EN TAIWAN
210510-01
MODEL / MODELO / MODÈLE: 9309
CERTIFIED TO CSA STD. C22.2 NO. 250.0
ATTESTÉ EN VERTU DE LA NORME CSA C22.2, N° 250.0
CERTIFICADO DE ACUERDO A LA NORMA CSA C22.2, N° 250.0
CONFORMS TO UL STD. 1598
CONFORME À LA NORME UL 1598
CUMPLE CON LA NORMA UL 1598
FCC: BJ4-9309 IC:3984A-9309