### 4.5.2 Test Procedure

Test method Refer as KDB 789033 D02.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 40GHz set to the low, Mid and High channels with the EUT transmit.

4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)

5. The SA setting following：

(1) Below 1G：RBW = 100kHz, VBW ≥ 3*RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2) Above 1G：

(2.1) For Peak measurement：RBW = 1MHz, VBW ≥ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2.2) For Average measurement：RBW = 1MHz, VBW

˙If Duty Cycle ≥ 98%, VBW=10Hz.

˙If Duty Cycle < 98%, VBW=1/T.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 4.5.3 Test Setup

**9kHz ~ 30MHz**

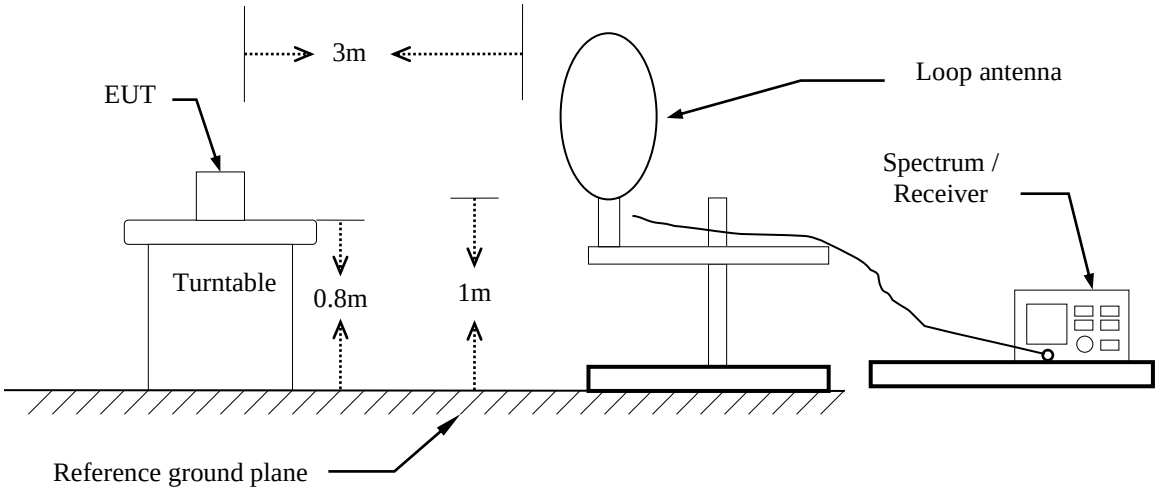


**30MHz ~ 1GHz**

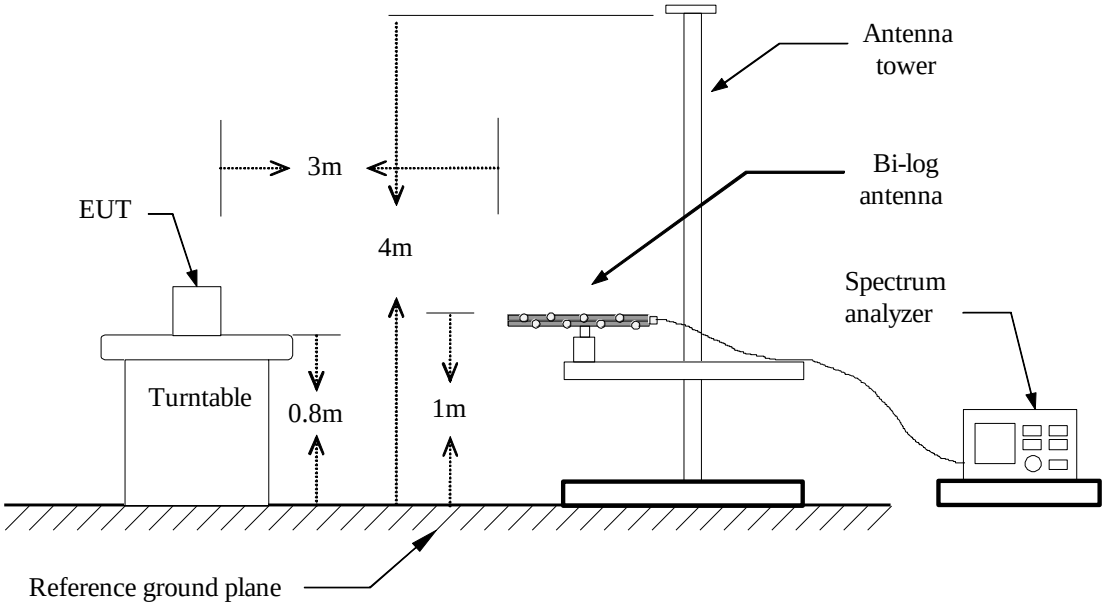


This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

**Above 1 GHz**

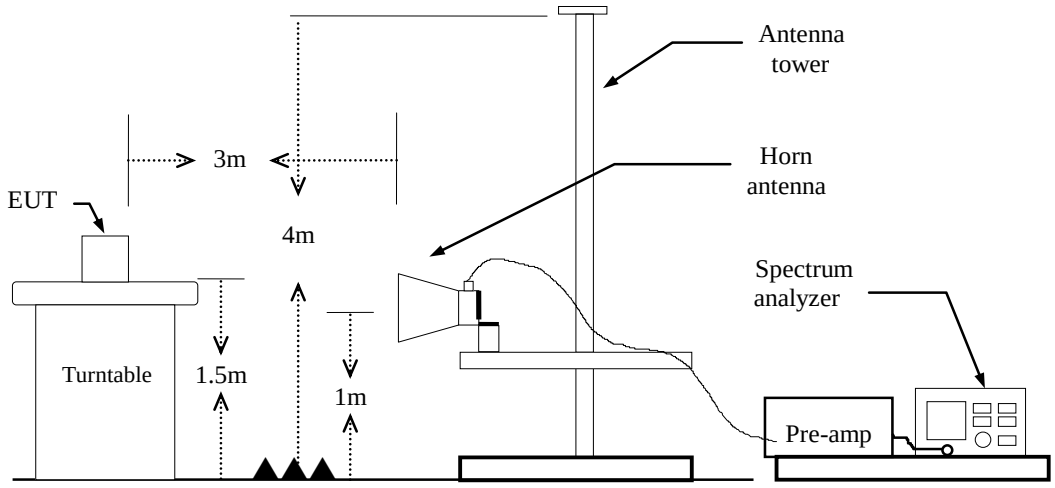


This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 4.5.4 Test Result

## Test Data

### Band Edge

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :26.7/58 |
| Frequency | :5180 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.5 | | |

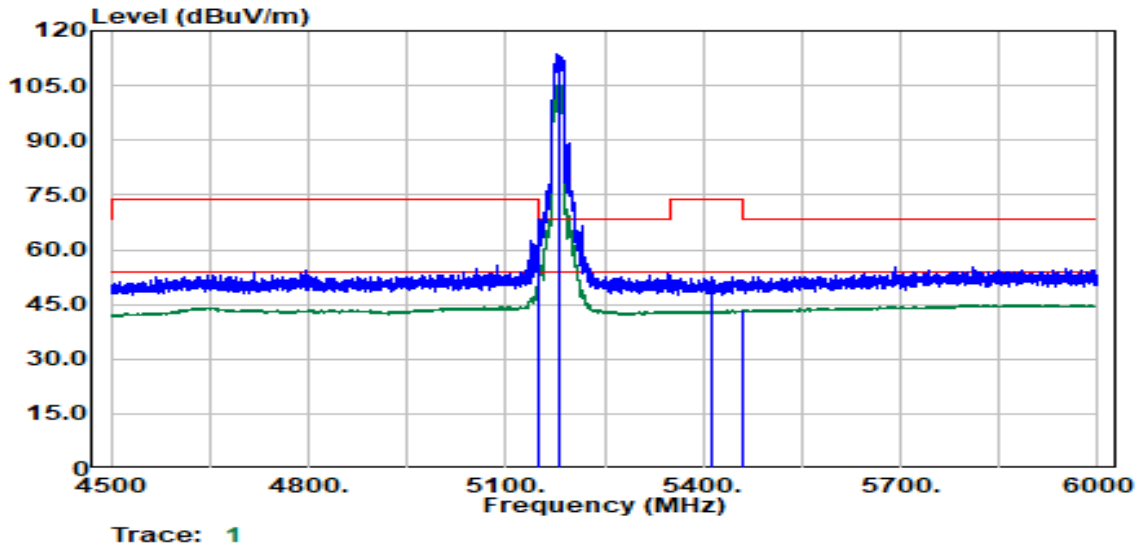


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5149.61 | Peak | 57.94 | 10.89 | 68.83 | 74.00 | -5.17 |
| 5150.00 | Average | 42.19 | 10.89 | 53.08 | 54.00 | -0.92 |
| 5180.00 | Peak | 100.87 | 10.81 | 111.68 | -- | -- |
| 5180.00 | Average | 94.35 | 10.81 | 105.16 | -- | -- |
| 5414.40 | Peak | 42.31 | 10.69 | 53.00 | 74.00 | -21.00 |
| 5459.16 | Average | 32.55 | 10.86 | 43.41 | 54.00 | -10.59 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :26.7/58 |
| Frequency | :5180 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.5 | | |

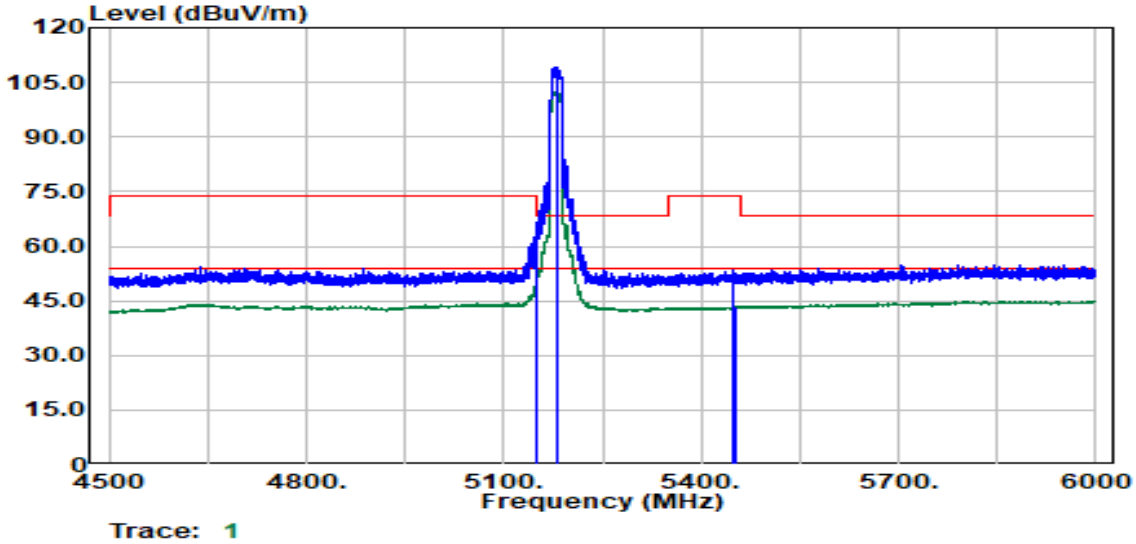


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5149.86 | Peak | 55.78 | 10.89 | 66.67 | 74.00 | -7.33 |
| 5150.00 | Average | 39.58 | 10.89 | 50.47 | 54.00 | -3.53 |
| 5180.00 | Peak | 98.32 | 10.81 | 109.12 | -- | -- |
| 5180.00 | Average | 91.57 | 10.81 | 102.38 | -- | -- |
| 5449.91 | Peak | 42.52 | 10.85 | 53.37 | 74.00 | -20.63 |
| 5452.16 | Average | 32.62 | 10.85 | 43.47 | 54.00 | -10.53 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band1 | Temp./Humi. | :26.7/58 |
| Frequency | :5180 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16 | | |

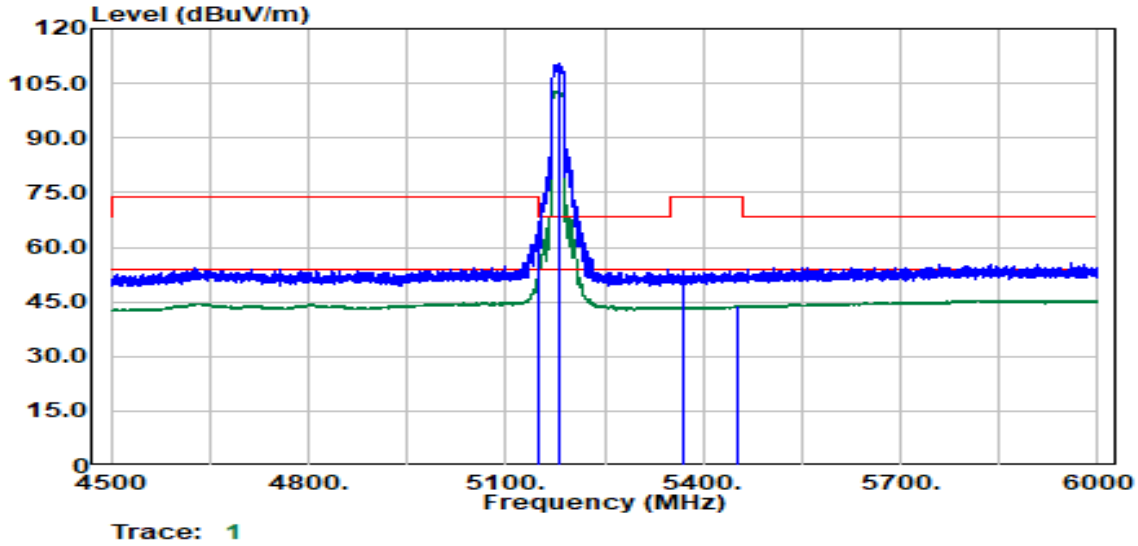


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5148.86 | Peak | 55.99 | 10.89 | 66.88 | 74.00 | -7.12 |
| 5149.86 | Average | 42.17 | 10.89 | 53.06 | 54.00 | -0.94 |
| 5180.00 | Peak | 100.28 | 10.81 | 111.09 | -- | -- |
| 5180.00 | Average | 92.95 | 10.81 | 103.75 | -- | -- |
| 5370.15 | Peak | 42.81 | 10.71 | 53.52 | 74.00 | -20.48 |
| 5453.16 | Average | 32.96 | 10.85 | 43.81 | 54.00 | -10.19 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band1 | Temp./Humi. | :26.7/58 |
| Frequency | :5180 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16 | | |

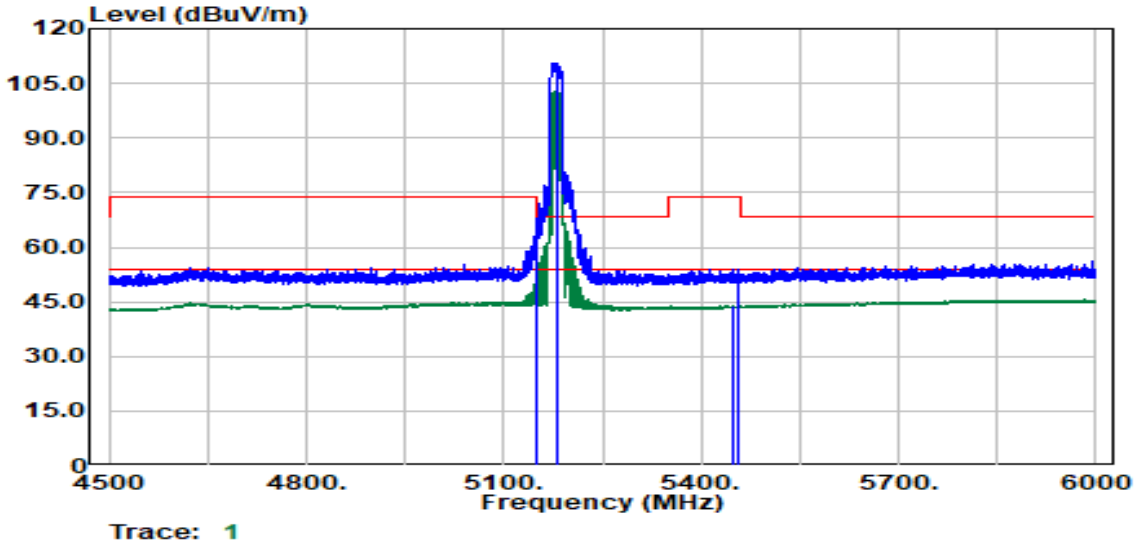


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5149.86 | Peak | 54.93 | 10.89 | 65.82 | 74.00 | -8.18 |
| 5149.86 | Average | 40.58 | 10.89 | 51.47 | 54.00 | -2.53 |
| 5180.00 | Peak | 99.76 | 10.81 | 110.57 | -- | -- |
| 5180.00 | Average | 92.17 | 10.81 | 102.97 | -- | -- |
| 5450.16 | Average | 32.94 | 10.85 | 43.79 | 54.00 | -10.21 |
| 5457.41 | Peak | 43.19 | 10.86 | 54.05 | 74.00 | -19.95 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band1 | Temp./Humi. | :25.9/56 |
| Frequency | :5190 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13.5 | | |

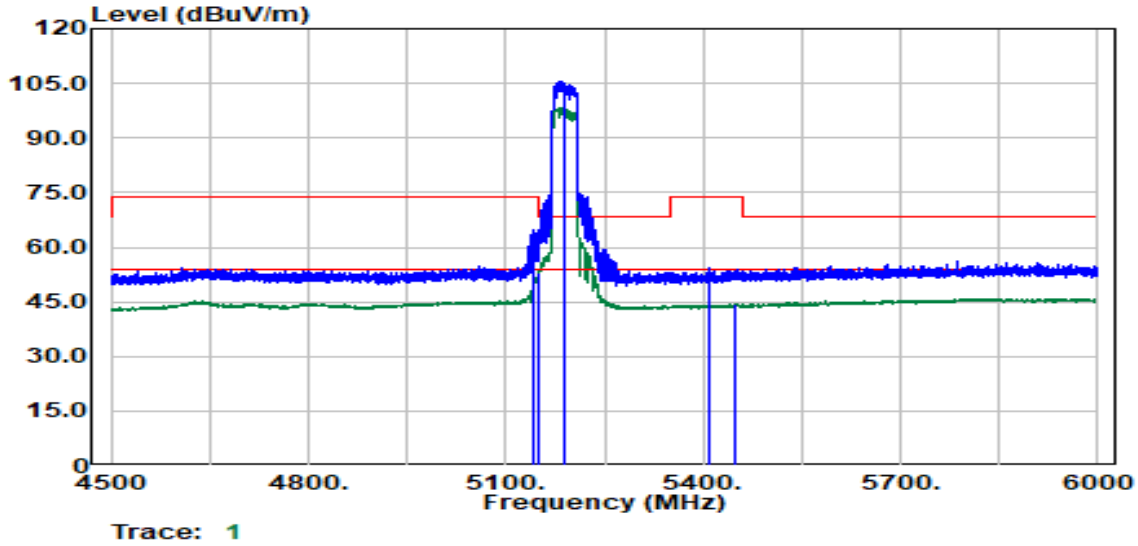


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5142.36 | Peak | 53.90 | 10.90 | 64.80 | 74.00 | -9.20 |
| 5150.00 | Average | 42.23 | 10.89 | 53.12 | 54.00 | -0.88 |
| 5190.00 | Peak | 94.85 | 10.78 | 105.63 | -- | -- |
| 5190.00 | Average | 87.44 | 10.78 | 98.22 | -- | -- |
| 5408.65 | Peak | 43.50 | 10.67 | 54.16 | 74.00 | -19.84 |
| 5450.16 | Average | 33.40 | 10.85 | 44.25 | 54.00 | -9.75 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band1 | Temp./Humi. | :25.9/56 |
| Frequency | :5190 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13.5 | | |

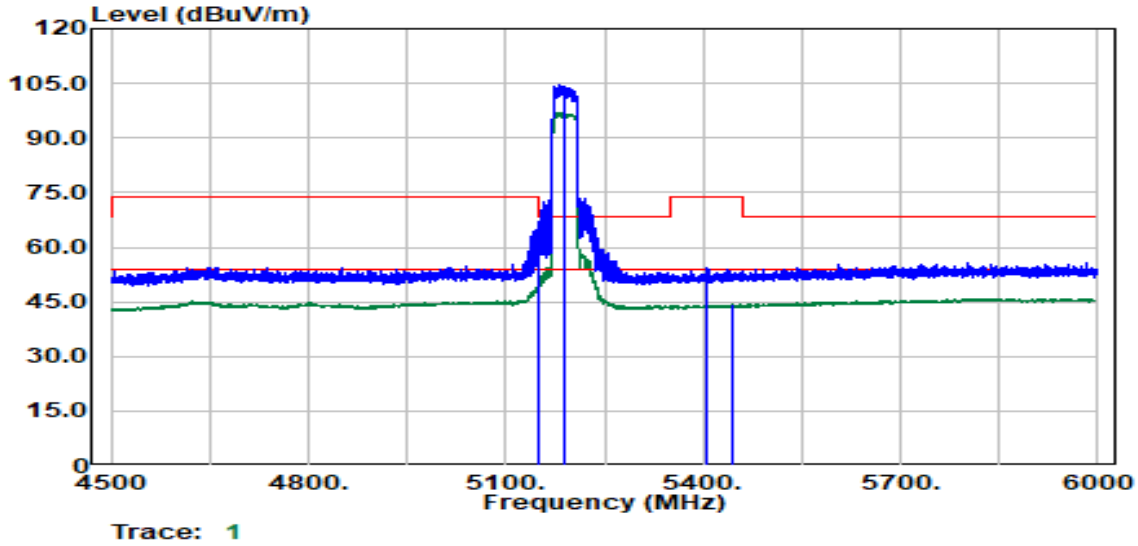


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5148.36 | Peak | 54.31 | 10.89 | 65.20 | 74.00 | -8.80 |
| 5150.00 | Average | 38.41 | 10.89 | 49.30 | 54.00 | -4.70 |
| 5190.00 | Peak | 93.62 | 10.78 | 104.40 | -- | -- |
| 5190.00 | Average | 86.33 | 10.78 | 97.11 | -- | -- |
| 5403.90 | Peak | 43.74 | 10.65 | 54.39 | 74.00 | -19.61 |
| 5443.66 | Average | 33.53 | 10.82 | 44.35 | 54.00 | -9.65 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :25.9/56 |
| Frequency | :5210 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.75 | | |

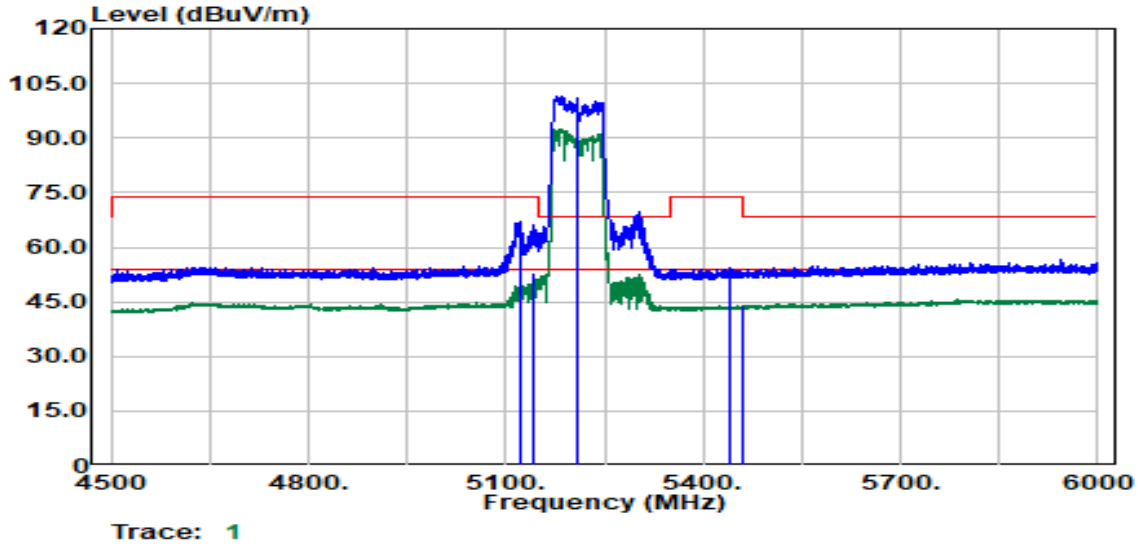


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5120.85 | Peak | 55.99 | 10.92 | 66.92 | 74.00 | -7.08 |
| 5143.11 | Average | 42.01 | 10.90 | 52.90 | 54.00 | -1.10 |
| 5210.00 | Peak | 90.86 | 10.73 | 101.59 | -- | -- |
| 5210.00 | Average | 81.80 | 10.73 | 92.54 | -- | -- |
| 5440.91 | Peak | 43.31 | 10.81 | 54.12 | 74.00 | -19.88 |
| 5459.16 | Average | 33.05 | 10.86 | 43.90 | 54.00 | -10.10 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :25.9/56 |
| Frequency | :5210 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.75 | | |

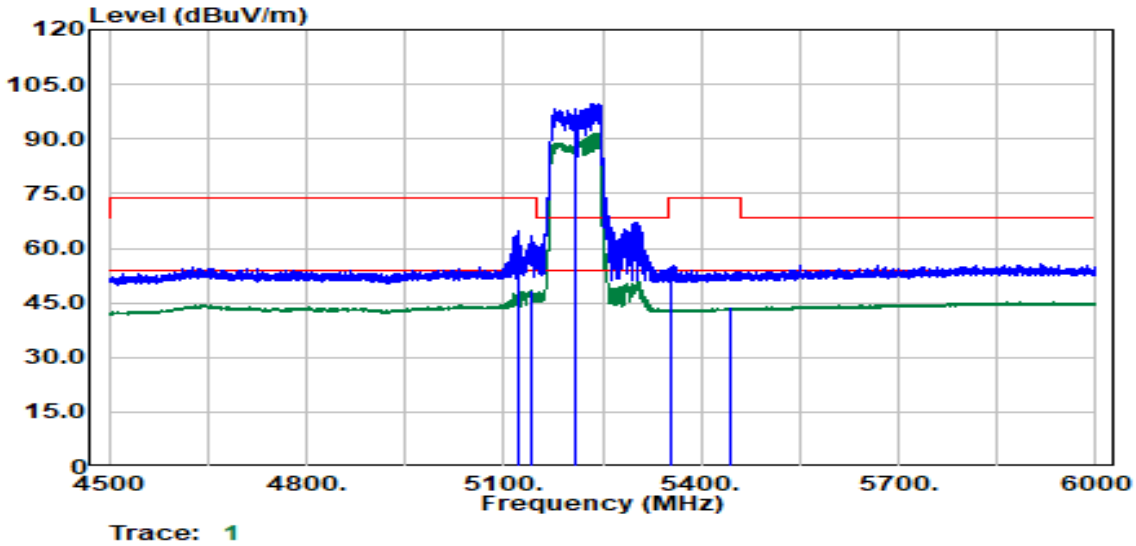


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5120.60 | Peak | 52.90 | 10.93 | 63.82 | 74.00 | -10.18 |
| 5140.61 | Average | 37.47 | 10.90 | 48.37 | 54.00 | -5.63 |
| 5210.00 | Peak | 88.06 | 10.73 | 98.79 | -- | -- |
| 5210.00 | Average | 80.92 | 10.73 | 91.65 | -- | -- |
| 5354.89 | Peak | 44.01 | 10.75 | 54.75 | 74.00 | -19.25 |
| 5444.16 | Average | 33.15 | 10.82 | 43.98 | 54.00 | -10.02 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band1 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5180 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.5 | | |

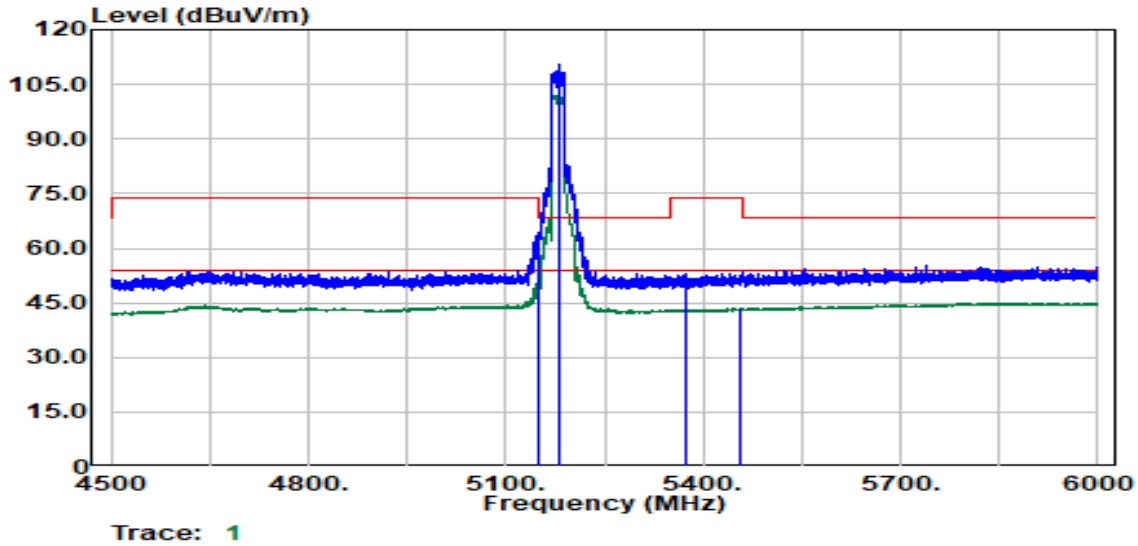


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5149.36 | Peak | 53.41 | 10.89 | 64.30 | 74.00 | -9.70 |
| 5150.00 | Average | 42.56 | 10.89 | 53.45 | 54.00 | -0.55 |
| 5180.00 | Peak | 100.00 | 10.81 | 110.80 | -- | -- |
| 5180.00 | Average | 91.13 | 10.81 | 101.94 | -- | -- |
| 5375.15 | Peak | 42.49 | 10.69 | 53.18 | 74.00 | -20.82 |
| 5455.41 | Average | 32.48 | 10.86 | 43.34 | 54.00 | -10.66 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band1 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5180 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.5 | | |

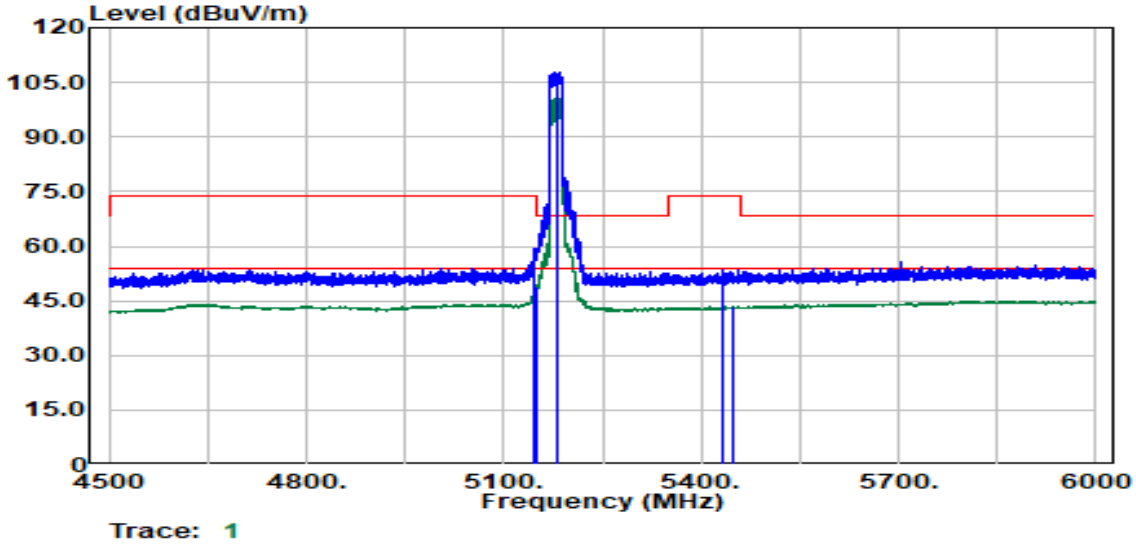


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5144.86 | Peak | 48.51 | 10.90 | 59.41 | 74.00 | -14.59 |
| 5150.00 | Average | 37.97 | 10.89 | 48.86 | 54.00 | -5.14 |
| 5180.00 | Peak | 97.16 | 10.81 | 107.97 | -- | -- |
| 5180.00 | Average | 89.75 | 10.81 | 100.55 | -- | -- |
| 5433.16 | Peak | 42.78 | 10.78 | 53.56 | 74.00 | -20.44 |
| 5450.16 | Average | 32.60 | 10.85 | 43.46 | 54.00 | -10.54 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band1 RU106/53 | Temp./Humi. | :24.1/59 |
| Frequency | :5180 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13.5 | | |

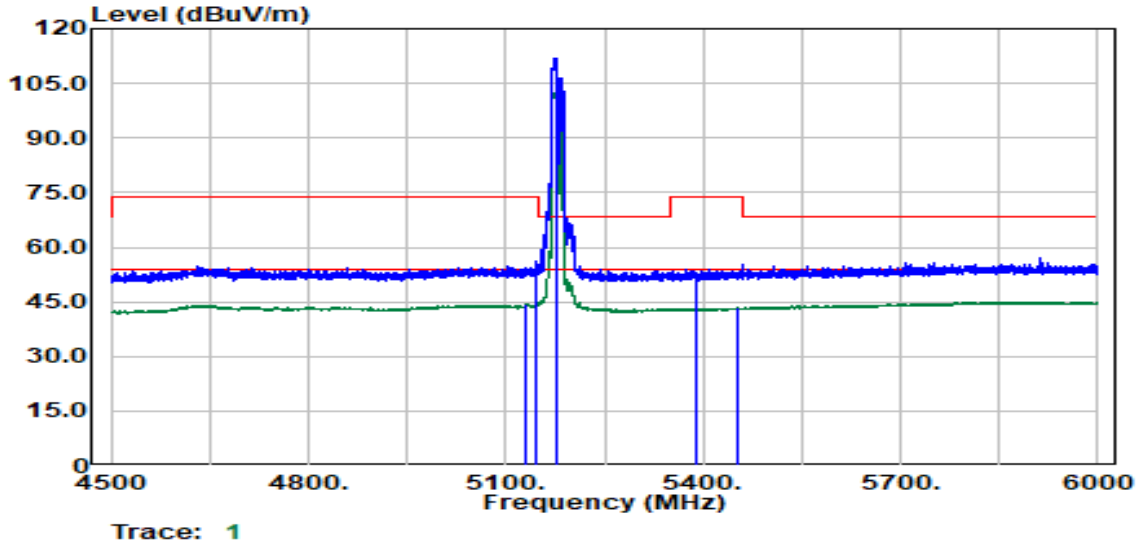


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5131.11 | Average | 33.59 | 10.91 | 44.51 | 54.00 | -9.49 |
| 5147.36 | Peak | 43.57 | 10.89 | 54.46 | 74.00 | -19.54 |
| 5176.86 | Average | 91.87 | 10.81 | 102.68 | -- | -- |
| 5177.86 | Peak | 101.48 | 10.81 | 112.29 | -- | -- |
| 5390.65 | Peak | 42.72 | 10.65 | 53.37 | 74.00 | -20.63 |
| 5454.16 | Average | 32.47 | 10.85 | 43.33 | 54.00 | -10.67 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band1 RU106/53 | Temp./Humi. | :24.1/59 |
| Frequency | :5180 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13.5 | | |

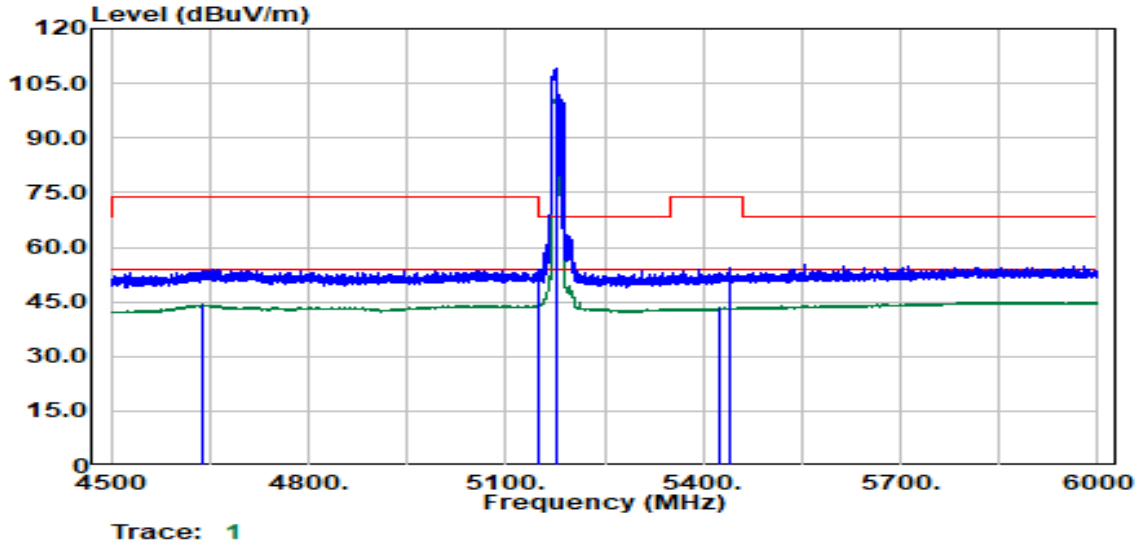


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4640.52 | Average | 33.88 | 10.31 | 44.19 | 54.00 | -9.81 |
| 5149.61 | Peak | 43.10 | 10.89 | 53.99 | 74.00 | -20.01 |
| 5175.36 | Peak | 98.31 | 10.82 | 109.13 | -- | -- |
| 5176.86 | Average | 90.00 | 10.81 | 100.82 | -- | -- |
| 5424.65 | Average | 32.58 | 10.74 | 43.32 | 54.00 | -10.68 |
| 5438.91 | Peak | 43.39 | 10.80 | 54.19 | 74.00 | -19.81 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band1 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5190 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.5 | | |

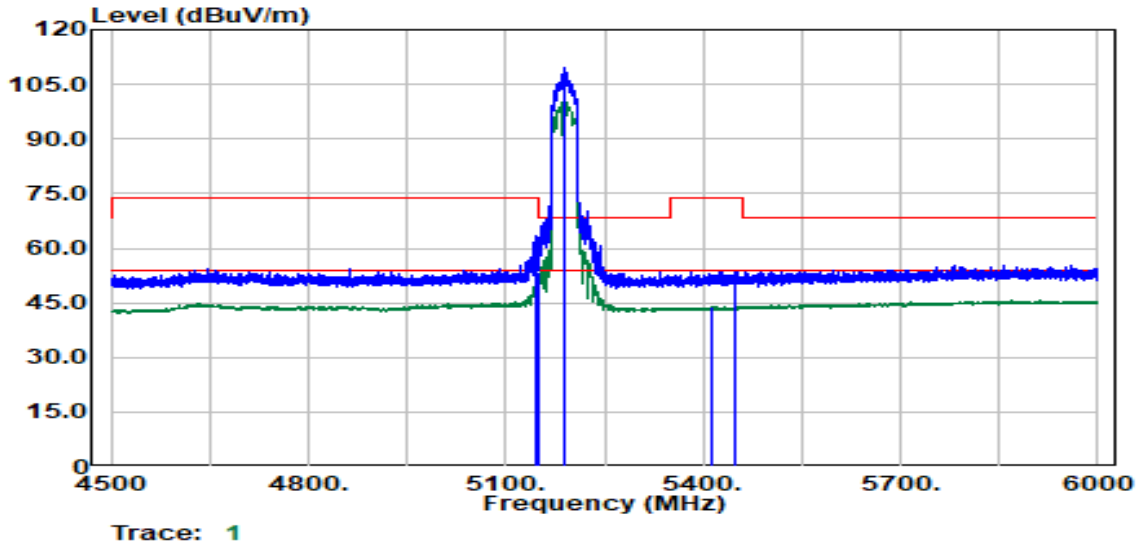


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5146.86 | Peak | 52.35 | 10.89 | 63.24 | 74.00 | -10.76 |
| 5150.00 | Average | 42.42 | 10.89 | 53.31 | 54.00 | -0.69 |
| 5190.00 | Peak | 99.41 | 10.78 | 110.19 | -- | -- |
| 5190.00 | Average | 90.03 | 10.78 | 100.81 | -- | -- |
| 5411.90 | Average | 33.28 | 10.68 | 43.96 | 54.00 | -10.04 |
| 5449.16 | Peak | 42.69 | 10.85 | 53.54 | 74.00 | -20.46 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band1 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5190 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.5 | | |

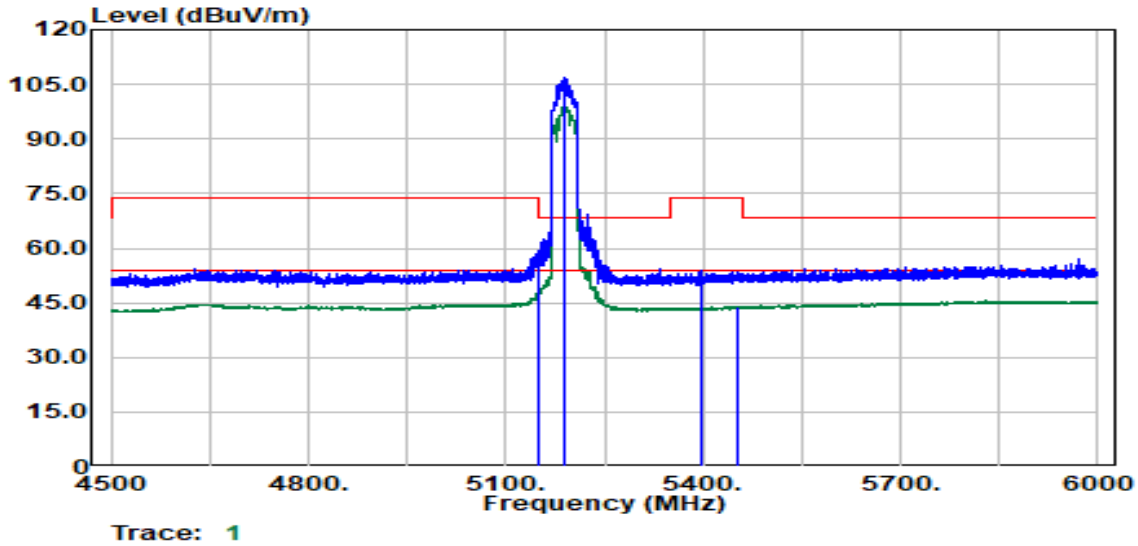


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5149.61 | Peak | 47.67 | 10.89 | 58.56 | 74.00 | -15.44 |
| 5150.00 | Average | 36.88 | 10.89 | 47.77 | 54.00 | -6.23 |
| 5190.00 | Peak | 96.32 | 10.78 | 107.09 | -- | -- |
| 5190.00 | Average | 88.18 | 10.78 | 98.95 | -- | -- |
| 5398.40 | Peak | 43.29 | 10.63 | 53.93 | 74.00 | -20.07 |
| 5451.91 | Average | 33.20 | 10.85 | 44.05 | 54.00 | -9.95 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band1 RU242/61 | Temp./Humi. | :24.1/59 |
| Frequency | :5190 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

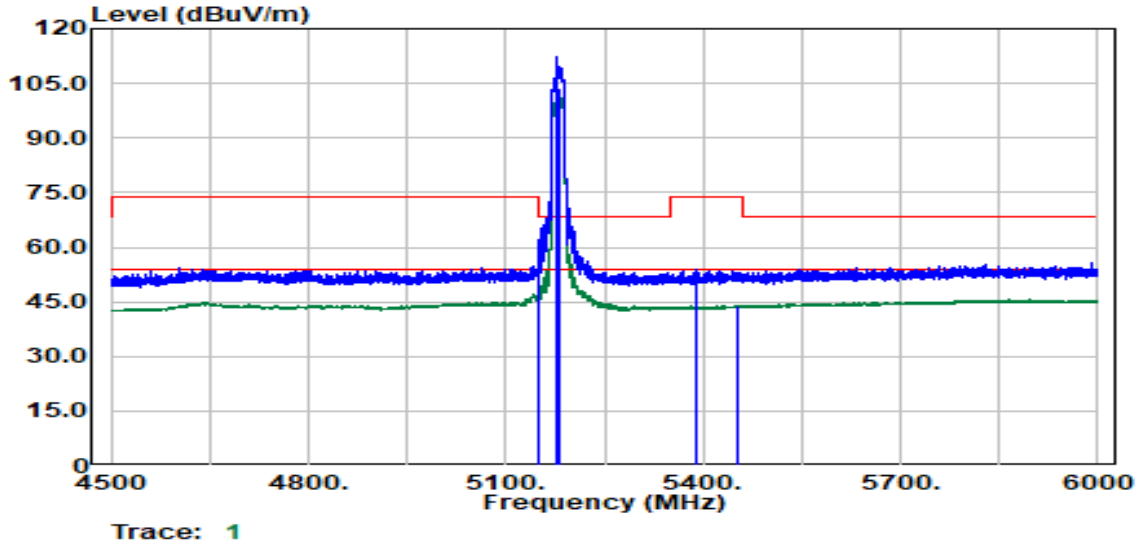


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5148.36 | Average | 37.04 | 10.89 | 47.93 | 54.00 | -6.07 |
| 5150.00 | Peak | 51.01 | 10.89 | 61.90 | 68.20 | -6.30 |
| 5178.86 | Peak | 101.91 | 10.81 | 112.71 | -- | -- |
| 5179.86 | Average | 92.75 | 10.81 | 103.56 | -- | -- |
| 5390.65 | Peak | 43.16 | 10.65 | 53.81 | 74.00 | -20.19 |
| 5450.41 | Average | 32.98 | 10.85 | 43.83 | 54.00 | -10.17 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band1 RU242/61 | Temp./Humi. | :24.1/59 |
| Frequency | :5190 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

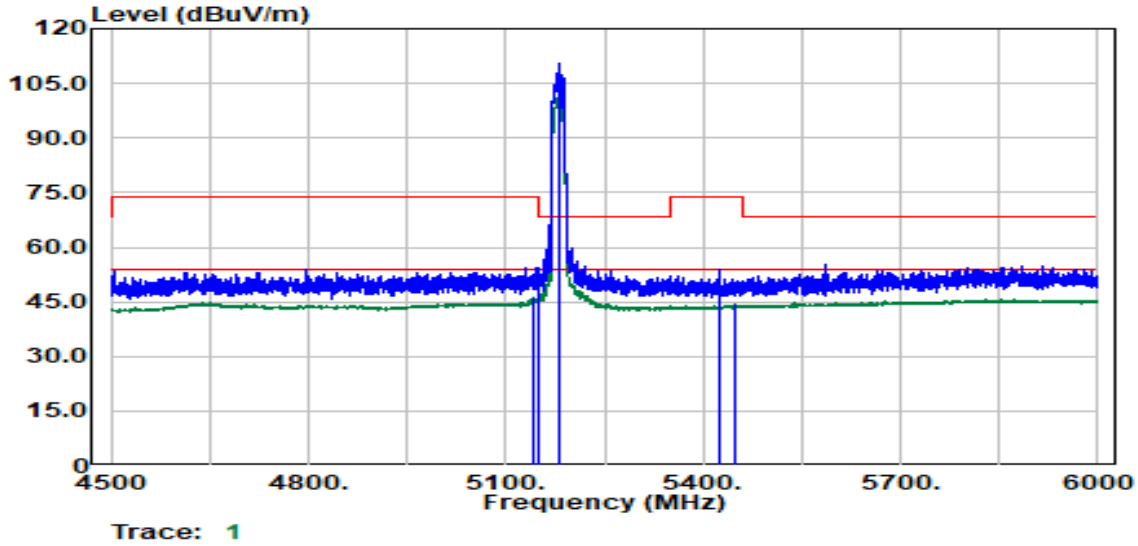


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5142.86 | Average | 35.29 | 10.90 | 46.18 | 54.00 | -7.82 |
| 5149.11 | Peak | 43.87 | 10.89 | 54.76 | 74.00 | -19.24 |
| 5179.86 | Average | 91.05 | 10.81 | 101.85 | -- | -- |
| 5183.11 | Peak | 100.26 | 10.80 | 111.06 | -- | -- |
| 5425.15 | Peak | 43.40 | 10.74 | 54.14 | 74.00 | -19.86 |
| 5447.41 | Average | 33.36 | 10.84 | 44.20 | 54.00 | -9.80 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band1 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5210 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.25 | | |

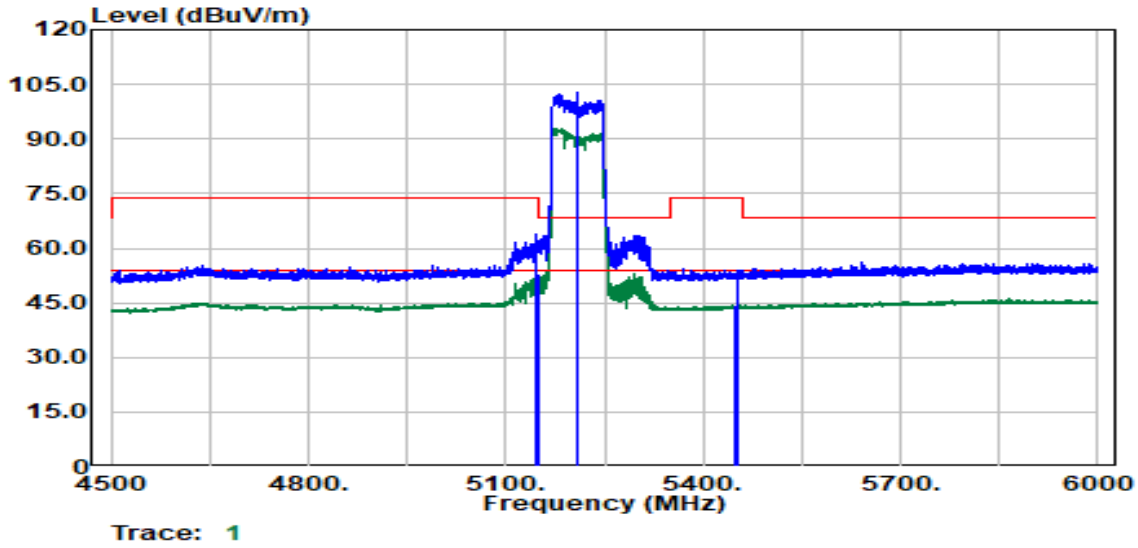


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5145.86 | Peak | 49.95 | 10.89 | 60.85 | 74.00 | -13.15 |
| 5149.86 | Average | 42.10 | 10.89 | 52.99 | 54.00 | -1.01 |
| 5210.00 | Peak | 92.72 | 10.73 | 103.45 | -- | -- |
| 5210.00 | Average | 82.09 | 10.73 | 92.83 | -- | -- |
| 5449.16 | Average | 33.57 | 10.85 | 44.42 | 54.00 | -9.58 |
| 5451.66 | Peak | 42.98 | 10.85 | 53.83 | 74.00 | -20.17 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band1 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5210 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.25 | | |

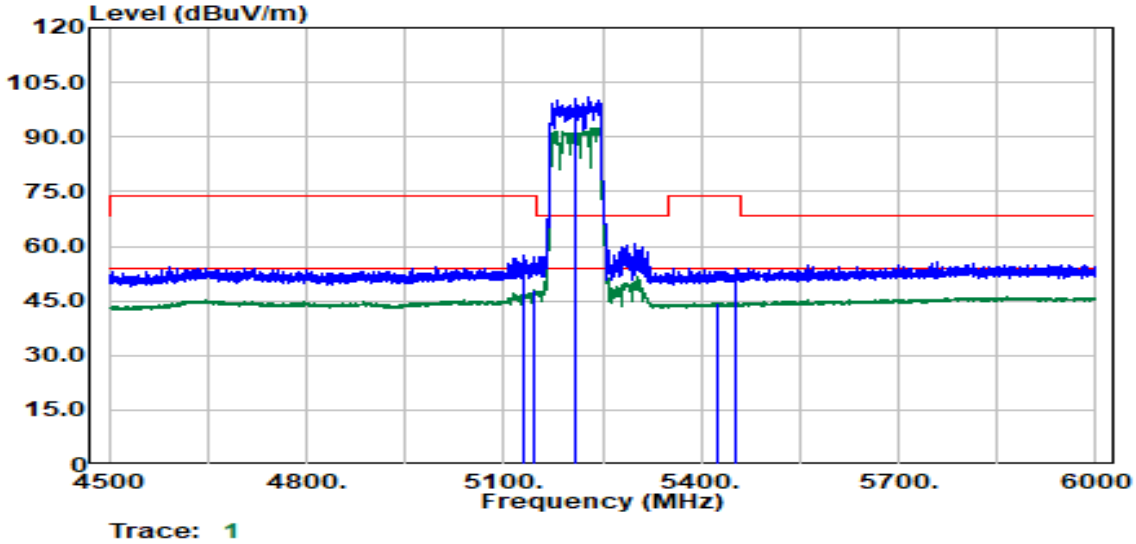


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5130.11 | Peak | 46.44 | 10.91 | 57.36 | 74.00 | -16.64 |
| 5146.61 | Average | 36.88 | 10.89 | 47.78 | 54.00 | -6.22 |
| 5210.00 | Peak | 90.18 | 10.73 | 100.91 | -- | -- |
| 5210.00 | Average | 81.75 | 10.73 | 92.48 | -- | -- |
| 5424.65 | Average | 33.86 | 10.74 | 44.60 | 54.00 | -9.40 |
| 5452.16 | Peak | 43.00 | 10.85 | 53.85 | 74.00 | -20.15 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band1 RU484/65 | Temp./Humi. | :25.3/56 |
| Frequency | :5210 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.5 | | |

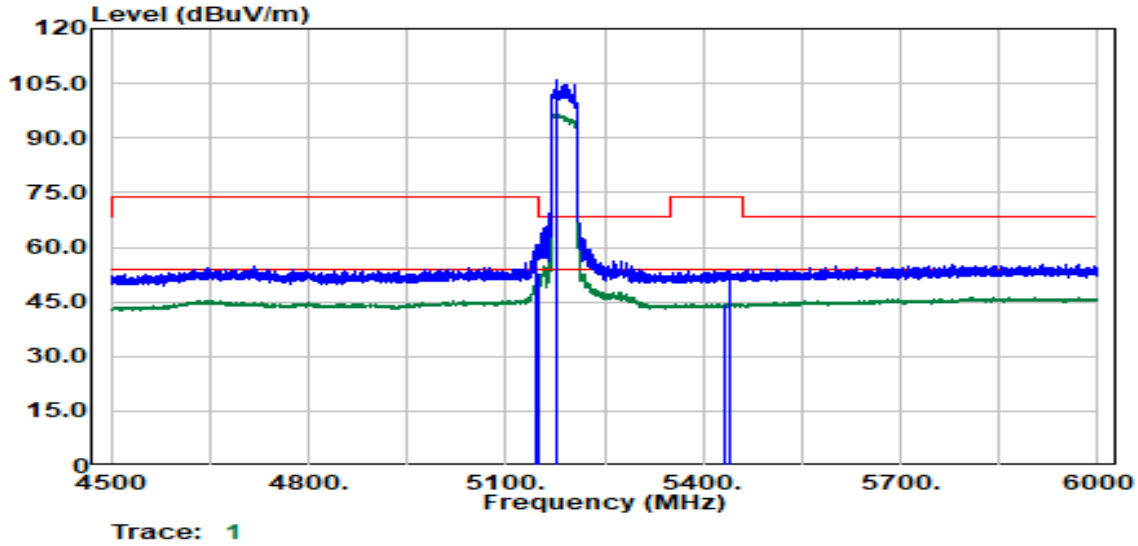


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5145.36 | Peak | 50.01 | 10.90 | 60.90 | 74.00 | -13.10 |
| 5148.86 | Average | 42.15 | 10.89 | 53.04 | 54.00 | -0.96 |
| 5177.36 | Average | 85.91 | 10.81 | 96.73 | -- | -- |
| 5178.61 | Peak | 95.06 | 10.81 | 105.87 | -- | -- |
| 5433.16 | Average | 33.77 | 10.78 | 44.55 | 54.00 | -9.45 |
| 5440.91 | Peak | 42.57 | 10.81 | 53.38 | 74.00 | -20.62 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band1 RU484/65 | Temp./Humi. | :25.3/56 |
| Frequency | :5210 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.5 | | |

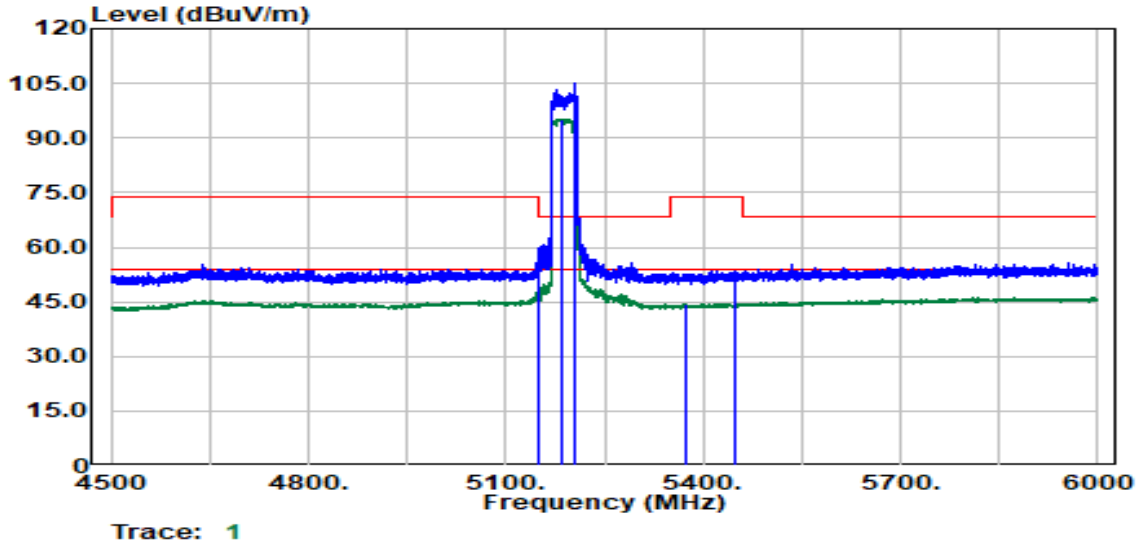


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5149.36 | Peak | 45.70 | 10.89 | 56.59 | 74.00 | -17.41 |
| 5149.36 | Average | 37.14 | 10.89 | 48.03 | 54.00 | -5.97 |
| 5183.86 | Average | 84.48 | 10.80 | 95.28 | -- | -- |
| 5204.62 | Peak | 94.34 | 10.74 | 105.09 | -- | -- |
| 5374.90 | Average | 33.77 | 10.70 | 44.47 | 54.00 | -9.53 |
| 5447.91 | Peak | 42.70 | 10.84 | 53.54 | 74.00 | -20.46 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :26.7/58 |
| Frequency | :5320 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18.5 | | |

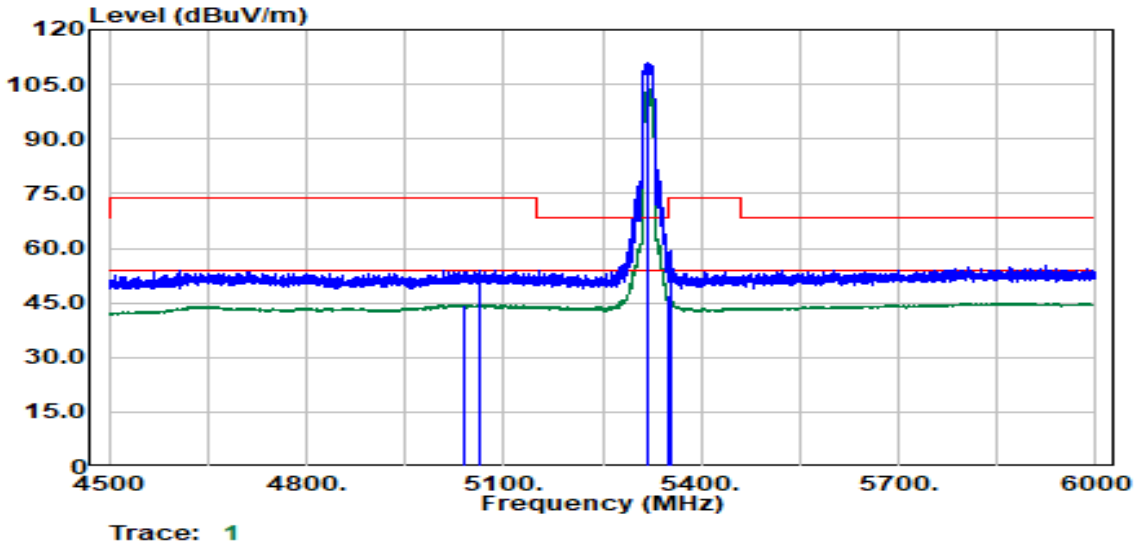


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5039.84 | Average | 33.63 | 10.87 | 44.50 | 54.00 | -9.50 |
| 5062.59 | Peak | 43.01 | 10.90 | 53.91 | 74.00 | -20.09 |
| 5320.00 | Peak | 100.35 | 10.69 | 111.03 | -- | -- |
| 5320.00 | Average | 92.80 | 10.69 | 103.49 | -- | -- |
| 5350.14 | Average | 36.49 | 10.76 | 47.25 | 54.00 | -6.75 |
| 5352.39 | Peak | 48.51 | 10.75 | 59.27 | 74.00 | -14.73 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :26.7/58 |
| Frequency | :5320 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18.5 | | |

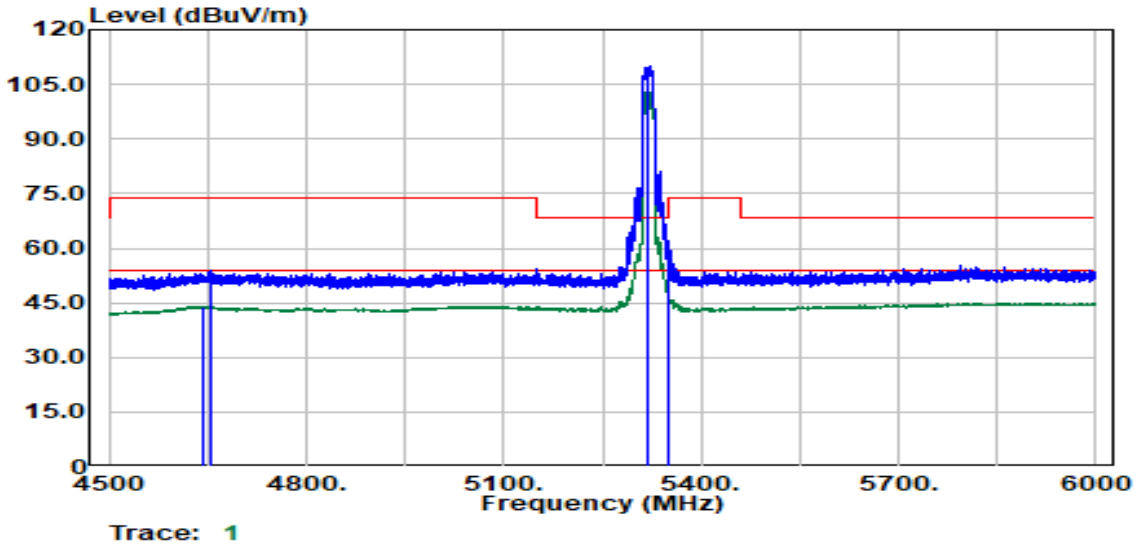


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4642.02 | Average | 33.81 | 10.31 | 44.12 | 54.00 | -9.88 |
| 4656.28 | Peak | 43.56 | 10.32 | 53.88 | 74.00 | -20.12 |
| 5320.00 | Peak | 99.13 | 10.69 | 109.82 | -- | -- |
| 5320.00 | Average | 91.97 | 10.69 | 102.66 | -- | -- |
| 5350.39 | Peak | 49.96 | 10.76 | 60.72 | 74.00 | -13.28 |
| 5350.39 | Average | 36.55 | 10.76 | 47.31 | 54.00 | -6.69 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band2 | Temp./Humi. | :26.7/58 |
| Frequency | :5320 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18 | | |

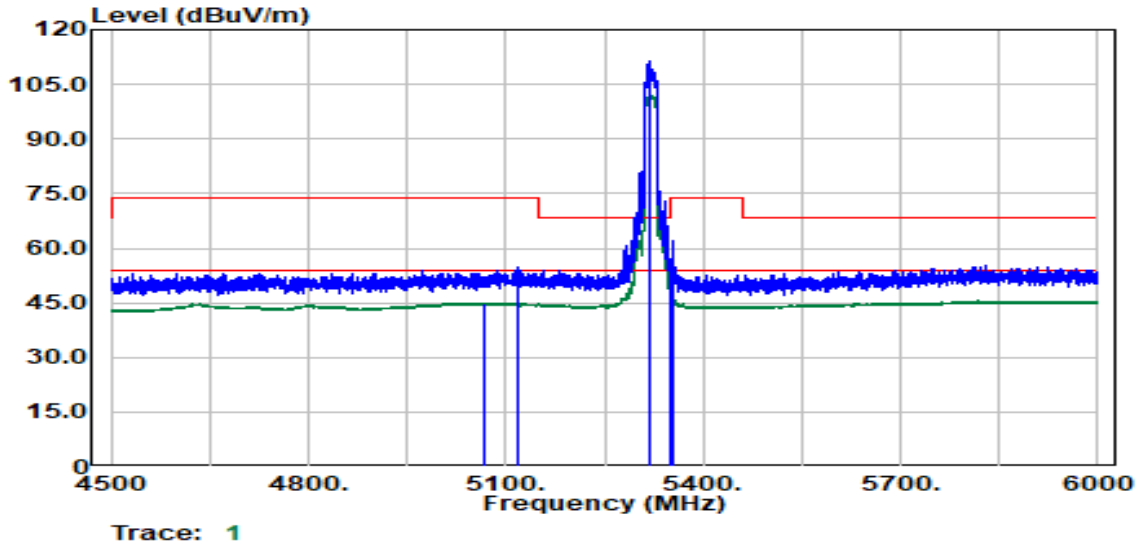


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5067.35 | Average | 33.97 | 10.90 | 44.87 | 54.00 | -9.13 |
| 5120.10 | Peak | 43.69 | 10.93 | 54.62 | 74.00 | -19.38 |
| 5320.00 | Peak | 101.16 | 10.69 | 111.85 | -- | -- |
| 5320.00 | Average | 93.07 | 10.69 | 103.76 | -- | -- |
| 5350.00 | Average | 40.12 | 10.76 | 50.88 | 54.00 | -3.12 |
| 5353.39 | Peak | 51.39 | 10.75 | 62.15 | 74.00 | -11.85 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band2 | Temp./Humi. | :26.7/58 |
| Frequency | :5320 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18 | | |

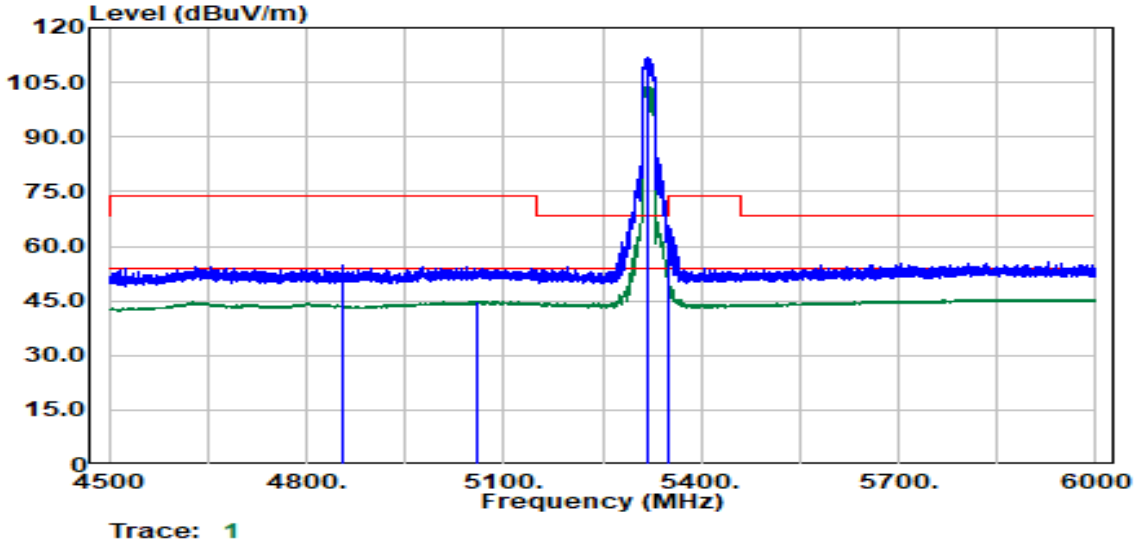


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4854.06 | Peak | 44.47 | 10.44 | 54.91 | 74.00 | -19.09 |
| 5057.84 | Average | 34.10 | 10.89 | 44.99 | 54.00 | -9.01 |
| 5320.00 | Peak | 101.07 | 10.69 | 111.75 | -- | -- |
| 5320.00 | Average | 93.02 | 10.69 | 103.71 | -- | -- |
| 5350.14 | Peak | 54.90 | 10.76 | 65.66 | 74.00 | -8.34 |
| 5350.14 | Average | 41.79 | 10.76 | 52.55 | 54.00 | -1.45 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band2 | Temp./Humi. | :25.9/56 |
| Frequency | :5310 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.5 | | |

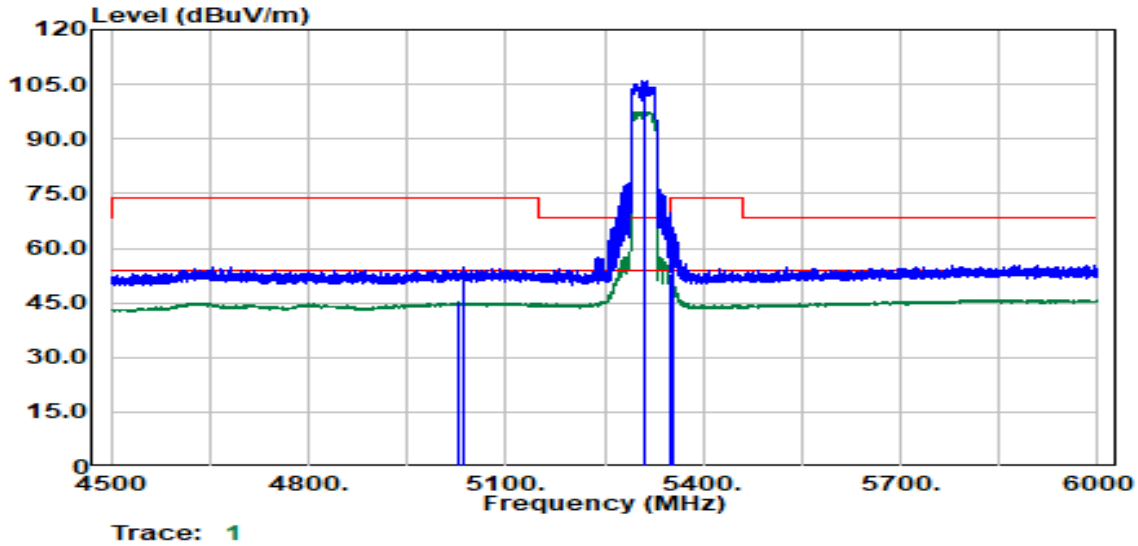


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5028.09 | Average | 34.24 | 10.86 | 45.10 | 54.00 | -8.90 |
| 5037.09 | Peak | 43.91 | 10.87 | 54.78 | 74.00 | -19.22 |
| 5310.00 | Peak | 95.23 | 10.66 | 105.90 | -- | -- |
| 5310.00 | Average | 87.89 | 10.66 | 98.55 | -- | -- |
| 5350.00 | Average | 42.16 | 10.76 | 52.92 | 54.00 | -1.08 |
| 5354.89 | Peak | 55.14 | 10.75 | 65.88 | 74.00 | -8.12 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band2 | Temp./Humi. | :25.9/56 |
| Frequency | :5310 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.5 | | |

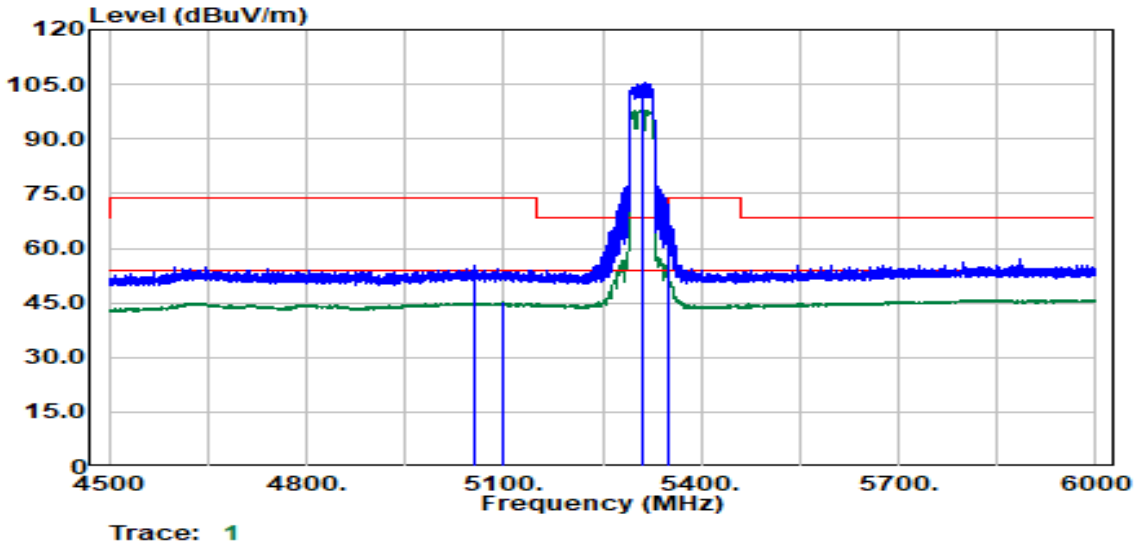


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5055.59 | Peak | 44.16 | 10.89 | 55.05 | 74.00 | -18.95 |
| 5098.10 | Average | 34.27 | 10.95 | 45.22 | 54.00 | -8.78 |
| 5310.00 | Peak | 94.69 | 10.66 | 105.35 | -- | -- |
| 5310.00 | Average | 87.18 | 10.66 | 97.85 | -- | -- |
| 5350.00 | Average | 41.57 | 10.76 | 52.33 | 54.00 | -1.67 |
| 5351.14 | Peak | 55.94 | 10.76 | 66.69 | 74.00 | -7.31 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band2 | Temp./Humi. | :25.9/56 |
| Frequency | :5290 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.25 | | |

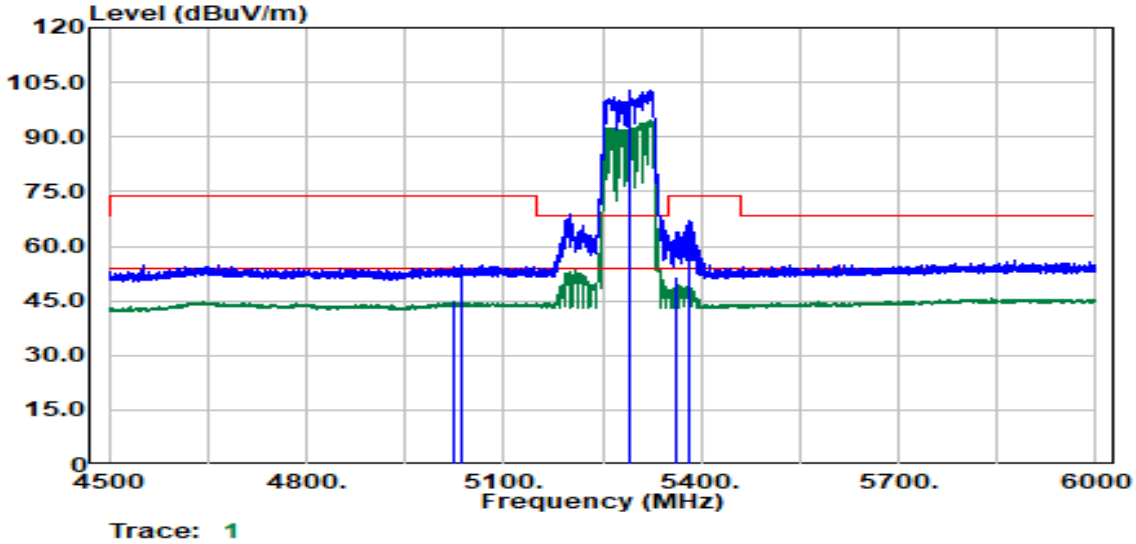


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5025.34 | Average | 33.82 | 10.86 | 44.68 | 54.00 | -9.32 |
| 5034.59 | Peak | 44.14 | 10.86 | 55.00 | 74.00 | -19.00 |
| 5290.00 | Peak | 92.51 | 10.64 | 103.15 | -- | -- |
| 5290.00 | Average | 83.95 | 10.64 | 94.60 | -- | -- |
| 5360.39 | Average | 41.05 | 10.73 | 51.79 | 54.00 | -2.21 |
| 5381.15 | Peak | 56.56 | 10.68 | 67.24 | 74.00 | -6.76 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band2 | Temp./Humi. | :25.9/56 |
| Frequency | :5290 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.25 | | |

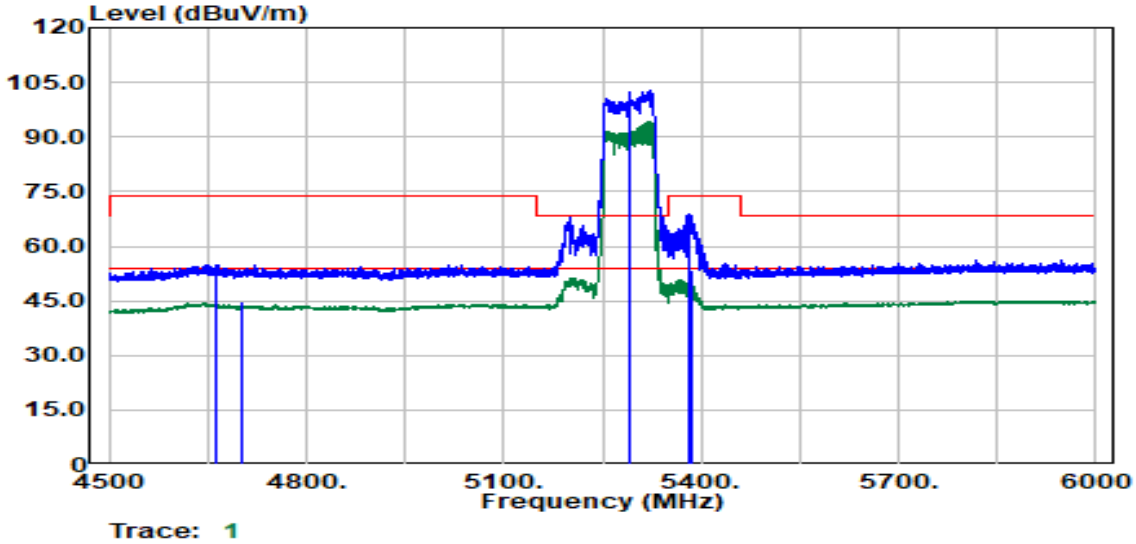


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4662.03 | Peak | 44.63 | 10.32 | 54.94 | 74.00 | -19.06 |
| 4700.53 | Average | 34.60 | 10.27 | 44.87 | 54.00 | -9.13 |
| 5290.00 | Peak | 92.17 | 10.64 | 102.81 | -- | -- |
| 5290.00 | Average | 83.65 | 10.64 | 94.29 | -- | -- |
| 5381.65 | Peak | 58.13 | 10.68 | 68.81 | 74.00 | -5.19 |
| 5385.40 | Average | 42.80 | 10.67 | 53.47 | 54.00 | -0.53 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band2 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5320 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18.25 | | |

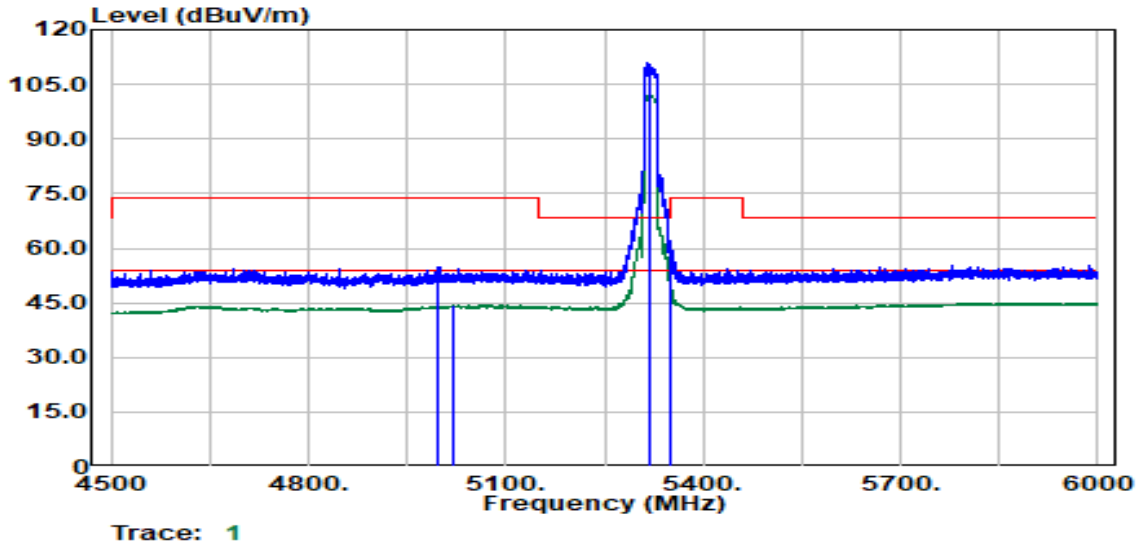


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4997.58 | Peak | 44.16 | 10.82 | 54.98 | 74.00 | -19.02 |
| 5019.59 | Average | 33.46 | 10.85 | 44.31 | 54.00 | -9.69 |
| 5320.00 | Peak | 100.34 | 10.69 | 111.03 | -- | -- |
| 5320.00 | Average | 92.47 | 10.69 | 103.16 | -- | -- |
| 5350.00 | Peak | 50.25 | 10.76 | 61.01 | 68.20 | -7.19 |
| 5350.14 | Average | 38.53 | 10.76 | 49.29 | 54.00 | -4.71 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band2 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5320 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18.25 | | |

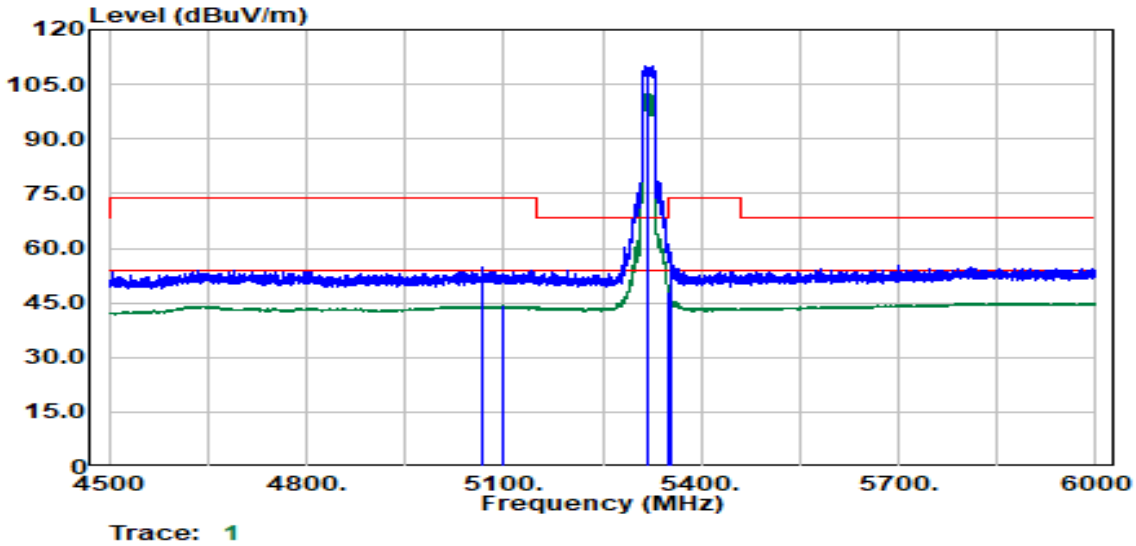


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5066.84 | Peak | 43.68 | 10.90 | 54.58 | 74.00 | -19.42 |
| 5098.35 | Average | 33.22 | 10.95 | 44.17 | 54.00 | -9.83 |
| 5320.00 | Peak | 99.40 | 10.69 | 110.09 | -- | -- |
| 5320.00 | Average | 91.90 | 10.69 | 102.59 | -- | -- |
| 5351.39 | Average | 37.09 | 10.76 | 47.85 | 54.00 | -6.15 |
| 5353.64 | Peak | 48.11 | 10.75 | 58.86 | 74.00 | -15.14 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band2 RU106/54 | Temp./Humi. | :24.1/59 |
| Frequency | :5320 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.5 | | |

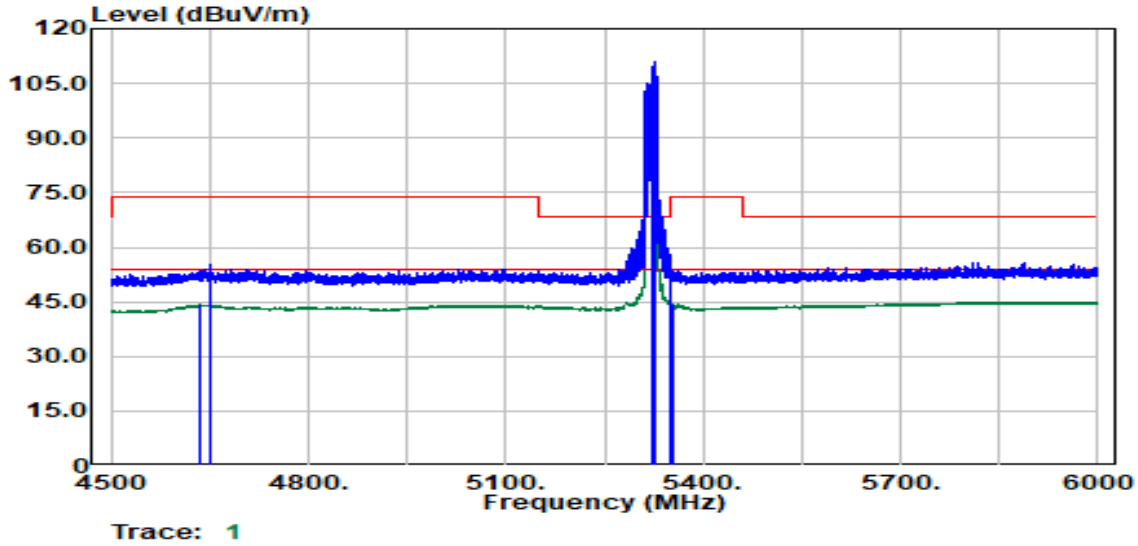


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4635.52 | Average | 33.87 | 10.30 | 44.17 | 54.00 | -9.83 |
| 4650.03 | Peak | 44.88 | 10.33 | 55.21 | 74.00 | -18.79 |
| 5322.89 | Average | 92.18 | 10.69 | 102.88 | -- | -- |
| 5326.39 | Peak | 100.48 | 10.70 | 111.18 | -- | -- |
| 5351.39 | Peak | 44.16 | 10.76 | 54.92 | 74.00 | -19.08 |
| 5353.14 | Average | 33.53 | 10.75 | 44.28 | 54.00 | -9.72 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band2 RU106/54 | Temp./Humi. | :24.1/59 |
| Frequency | :5320 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.5 | | |

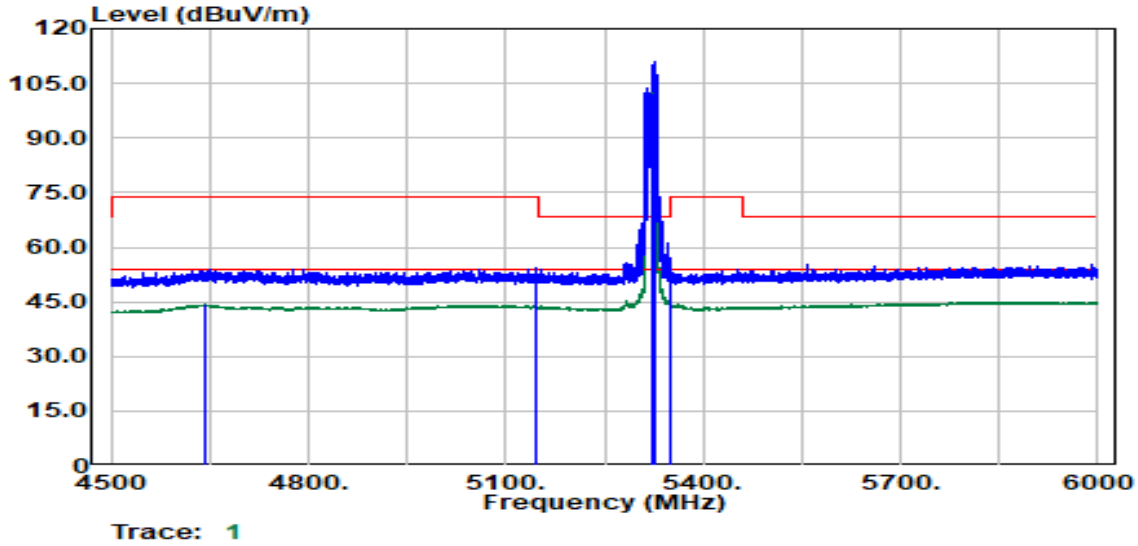


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4641.02 | Average | 33.84 | 10.31 | 44.15 | 54.00 | -9.85 |
| 5146.11 | Peak | 43.26 | 10.89 | 54.16 | 74.00 | -19.84 |
| 5322.64 | Average | 91.79 | 10.69 | 102.49 | -- | -- |
| 5325.89 | Peak | 100.14 | 10.70 | 110.84 | -- | -- |
| 5350.89 | Average | 33.64 | 10.76 | 44.40 | 54.00 | -9.60 |
| 5351.64 | Peak | 46.15 | 10.76 | 56.90 | 74.00 | -17.10 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band2 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5310 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.25 | | |

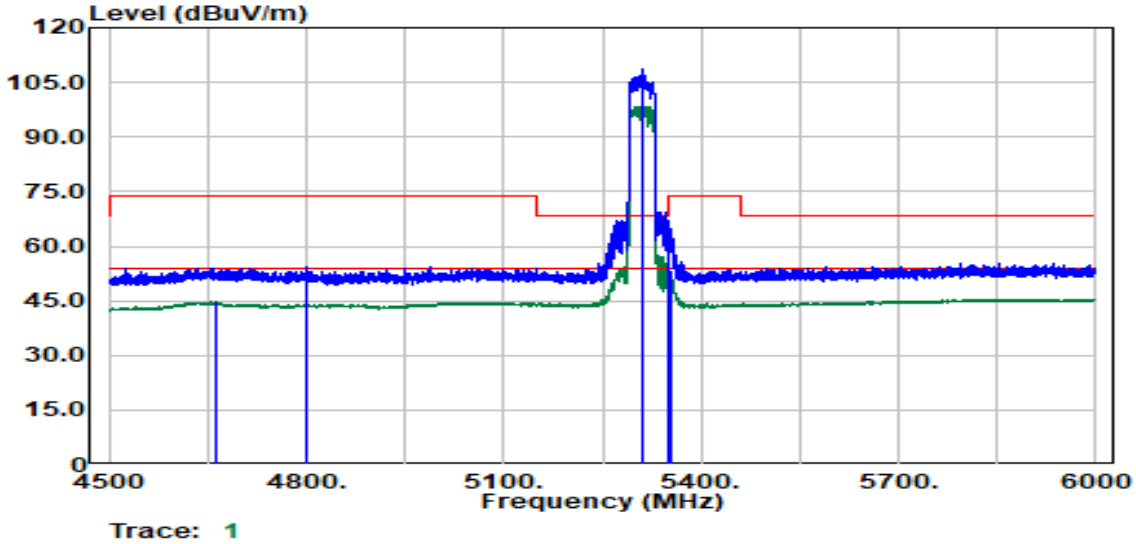


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4662.53 | Average | 34.36 | 10.31 | 44.67 | 54.00 | -9.33 |
| 4801.80 | Peak | 44.12 | 10.38 | 54.51 | 74.00 | -19.49 |
| 5310.00 | Peak | 98.47 | 10.66 | 109.14 | -- | -- |
| 5310.00 | Average | 88.05 | 10.66 | 98.72 | -- | -- |
| 5351.64 | Peak | 54.50 | 10.76 | 65.26 | 74.00 | -8.74 |
| 5352.89 | Average | 42.66 | 10.75 | 53.41 | 54.00 | -0.59 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band2 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5310 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.25 | | |

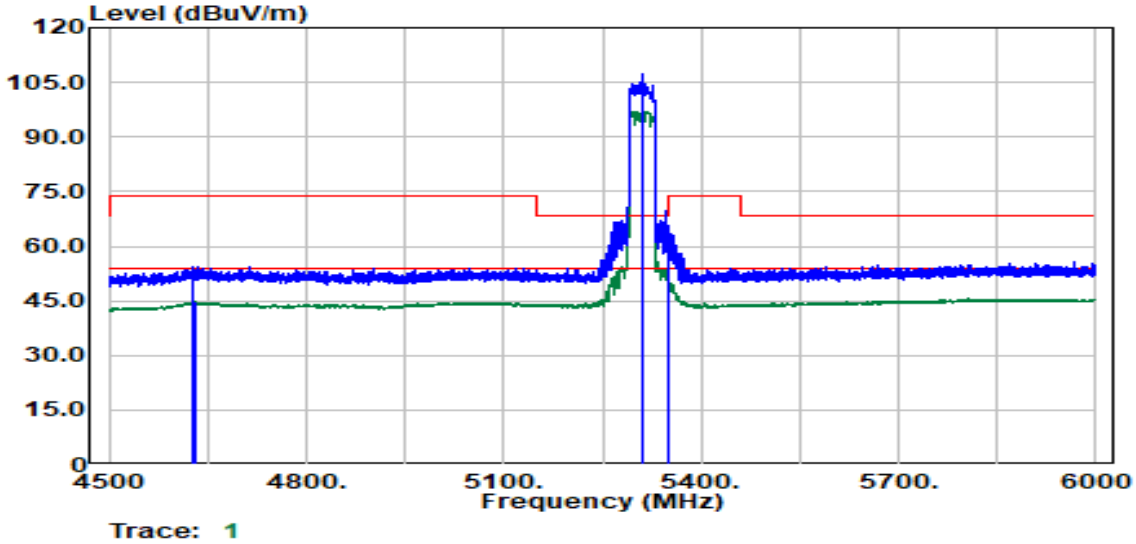


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4625.52 | Peak | 43.96 | 10.28 | 54.24 | 74.00 | -19.76 |
| 4632.52 | Average | 34.45 | 10.30 | 44.75 | 54.00 | -9.26 |
| 5310.00 | Peak | 97.31 | 10.66 | 107.97 | -- | -- |
| 5310.00 | Average | 86.58 | 10.66 | 97.24 | -- | -- |
| 5350.00 | Average | 40.52 | 10.76 | 51.28 | 54.00 | -2.72 |
| 5350.14 | Peak | 53.51 | 10.76 | 64.27 | 74.00 | -9.73 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band2 RU242/62 | Temp./Humi. | :24.1/59 |
| Frequency | :5310 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

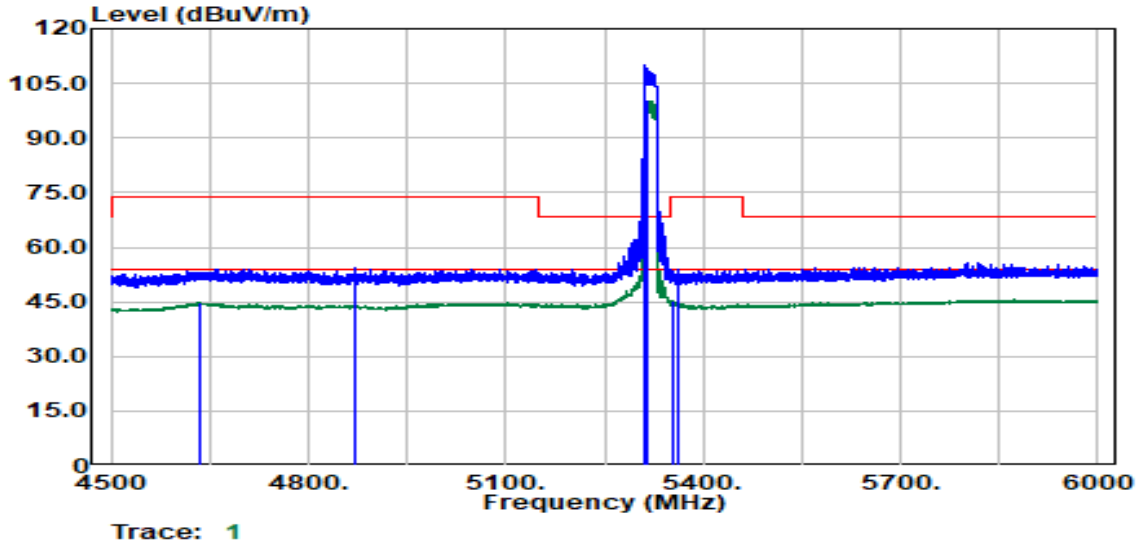


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4635.27 | Average | 34.36 | 10.30 | 44.66 | 54.00 | -9.34 |
| 4871.56 | Peak | 43.83 | 10.47 | 54.30 | 74.00 | -19.70 |
| 5312.39 | Peak | 99.83 | 10.67 | 110.50 | -- | -- |
| 5316.14 | Average | 89.88 | 10.68 | 100.56 | -- | -- |
| 5355.39 | Average | 34.43 | 10.75 | 45.18 | 54.00 | -8.82 |
| 5362.64 | Peak | 43.13 | 10.73 | 53.85 | 74.00 | -20.15 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band2 RU242/62 | Temp./Humi. | :24.1/59 |
| Frequency | :5310 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

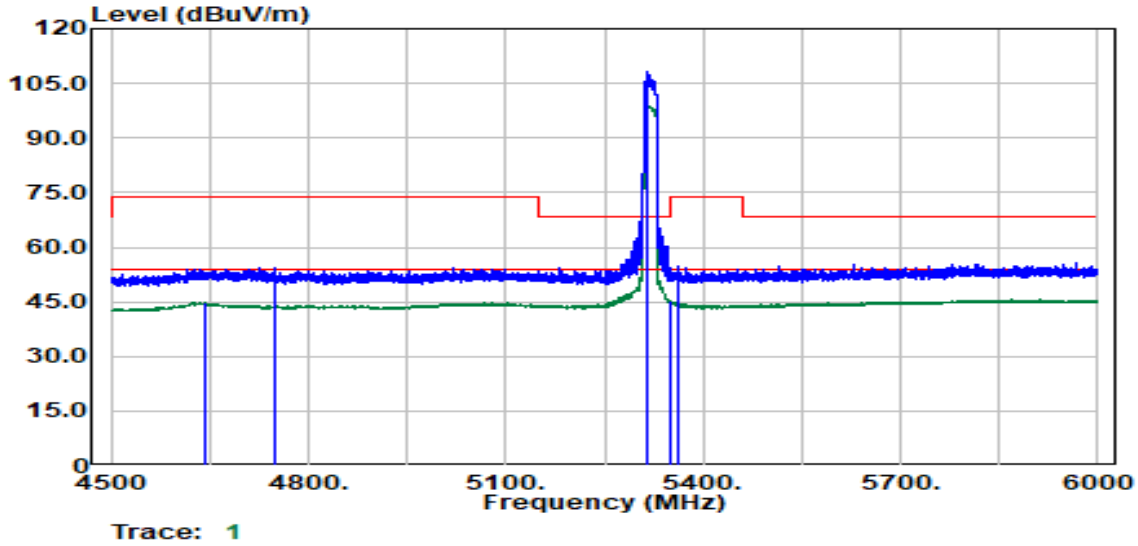


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4641.77 | Average | 34.54 | 10.31 | 44.85 | 54.00 | -9.15 |
| 4749.29 | Peak | 43.85 | 10.40 | 54.25 | 74.00 | -19.75 |
| 5315.14 | Peak | 97.44 | 10.68 | 108.11 | -- | -- |
| 5315.39 | Average | 88.28 | 10.68 | 98.96 | -- | -- |
| 5350.14 | Average | 34.36 | 10.76 | 45.12 | 54.00 | -8.88 |
| 5360.89 | Peak | 44.21 | 10.73 | 54.94 | 74.00 | -19.06 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band2 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5290 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13 | | |

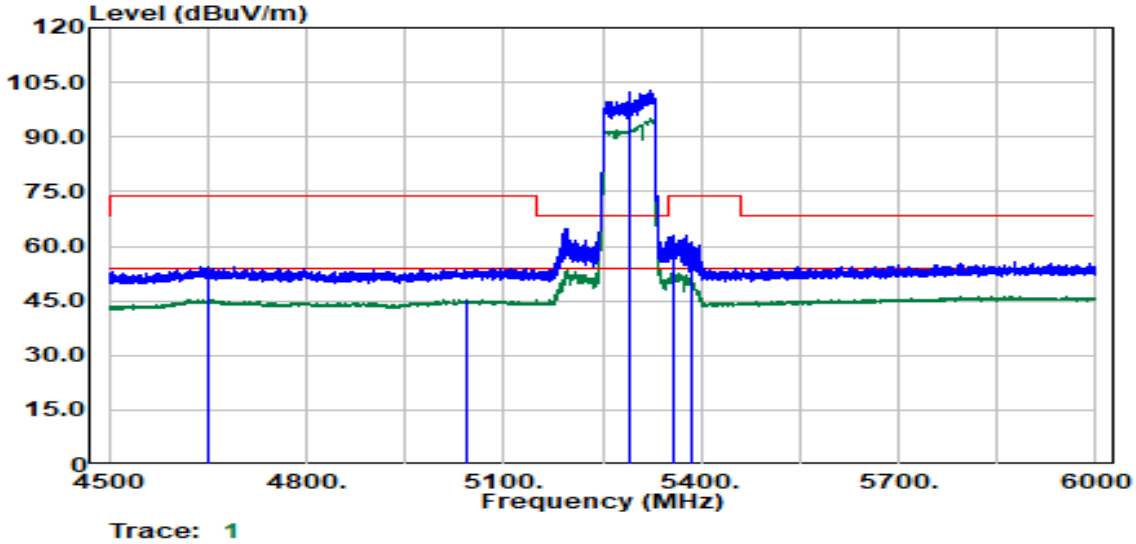


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4651.03 | Peak | 44.01 | 10.33 | 54.34 | 74.00 | -19.66 |
| 5045.09 | Average | 34.38 | 10.88 | 45.26 | 54.00 | -8.74 |
| 5290.00 | Peak | 92.33 | 10.64 | 102.97 | -- | -- |
| 5290.00 | Average | 84.23 | 10.64 | 94.87 | -- | -- |
| 5359.64 | Peak | 52.38 | 10.73 | 63.12 | 74.00 | -10.88 |
| 5384.90 | Average | 42.46 | 10.67 | 53.13 | 54.00 | -0.87 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band2 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5290 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13 | | |

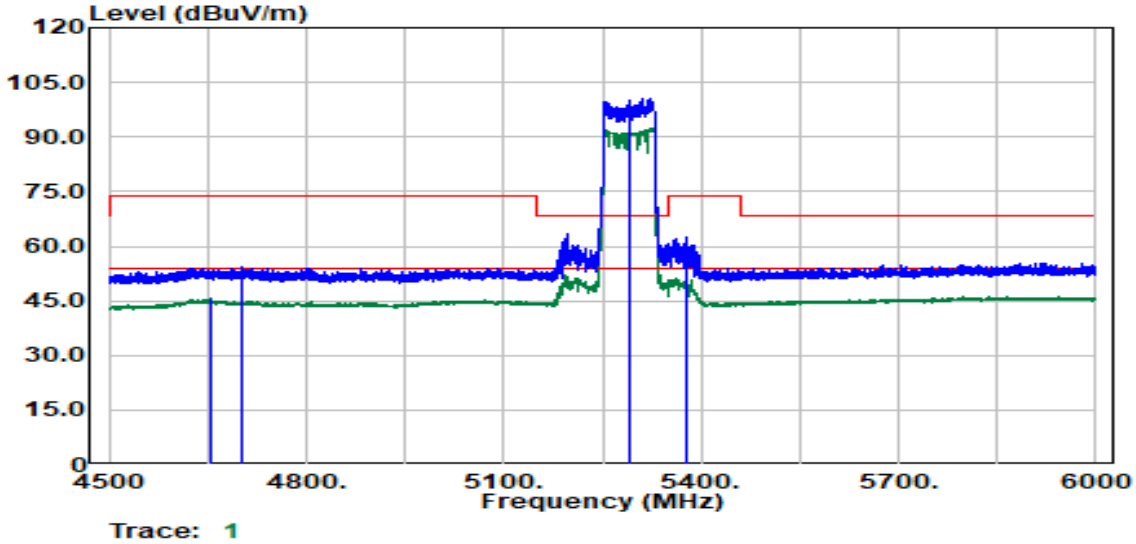


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4653.78 | Average | 35.44 | 10.33 | 45.77 | 54.00 | -8.23 |
| 4703.78 | Peak | 43.97 | 10.28 | 54.25 | 74.00 | -19.75 |
| 5290.00 | Peak | 90.00 | 10.64 | 100.65 | -- | -- |
| 5290.00 | Average | 81.86 | 10.64 | 92.50 | -- | -- |
| 5376.15 | Average | 41.35 | 10.69 | 52.04 | 54.00 | -1.96 |
| 5378.65 | Peak | 51.98 | 10.69 | 62.66 | 74.00 | -11.34 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band2 RU484/66 | Temp./Humi. | :25.3/56 |
| Frequency | :5290 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.5 | | |

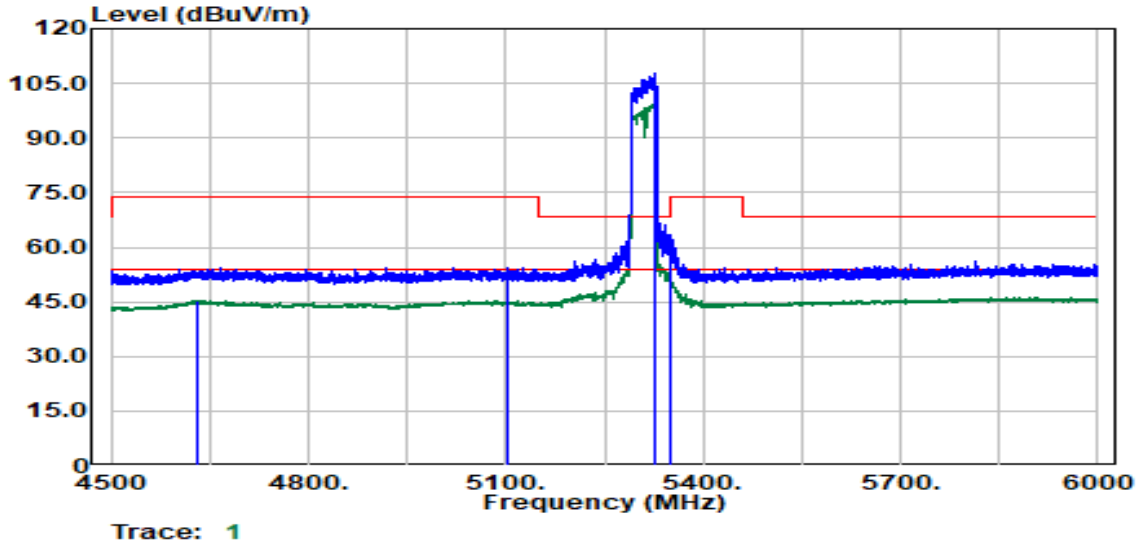


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4631.02 | Average | 35.07 | 10.29 | 45.37 | 54.00 | -8.63 |
| 5104.60 | Peak | 43.53 | 10.94 | 54.48 | 74.00 | -19.52 |
| 5325.39 | Peak | 97.25 | 10.70 | 107.95 | -- | -- |
| 5327.39 | Average | 88.72 | 10.71 | 99.42 | -- | -- |
| 5351.39 | Average | 42.14 | 10.76 | 52.90 | 54.00 | -1.10 |
| 5352.14 | Peak | 52.61 | 10.75 | 63.36 | 74.00 | -10.64 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band2 RU484/66 | Temp./Humi. | :25.3/56 |
| Frequency | :5290 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.5 | | |

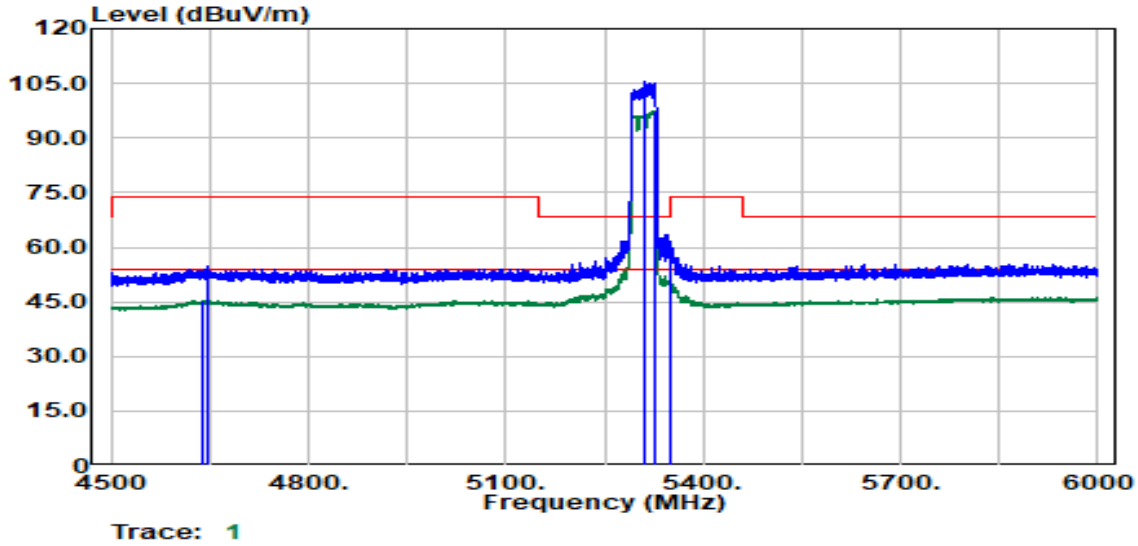


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 4637.52 | Average | 35.10 | 10.31 | 45.41 | 54.00 | -8.59 |
| 4648.53 | Peak | 44.27 | 10.33 | 54.59 | 74.00 | -19.41 |
| 5311.14 | Peak | 94.89 | 10.67 | 105.55 | -- | -- |
| 5326.39 | Average | 86.87 | 10.70 | 97.57 | -- | -- |
| 5350.64 | Average | 39.03 | 10.76 | 49.79 | 54.00 | -4.21 |
| 5351.89 | Peak | 50.92 | 10.76 | 61.68 | 74.00 | -12.32 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5500 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

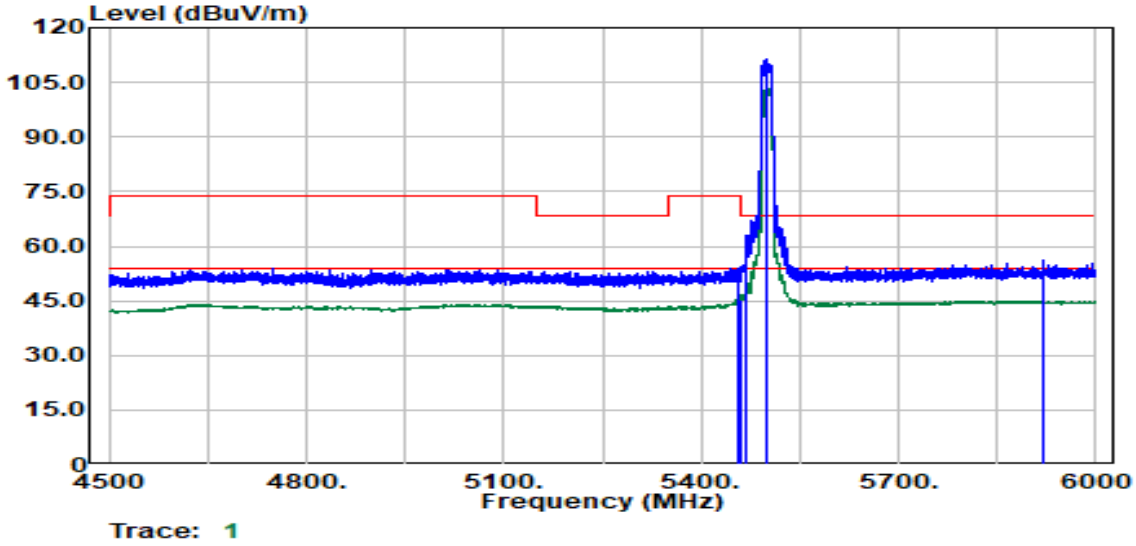


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5454.41 | Peak | 42.94 | 10.85 | 53.79 | 74.00 | -20.21 |
| 5458.41 | Average | 34.31 | 10.86 | 45.17 | 54.00 | -8.83 |
| 5469.66 | Peak | 52.41 | 10.87 | 63.28 | 68.20 | -4.92 |
| 5500.00 | Peak | 100.90 | 10.90 | 111.80 | -- | -- |
| 5500.00 | Average | 93.25 | 10.90 | 104.15 | -- | -- |
| 5919.49 | Peak | 43.65 | 12.36 | 56.00 | 68.20 | -12.20 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5500 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

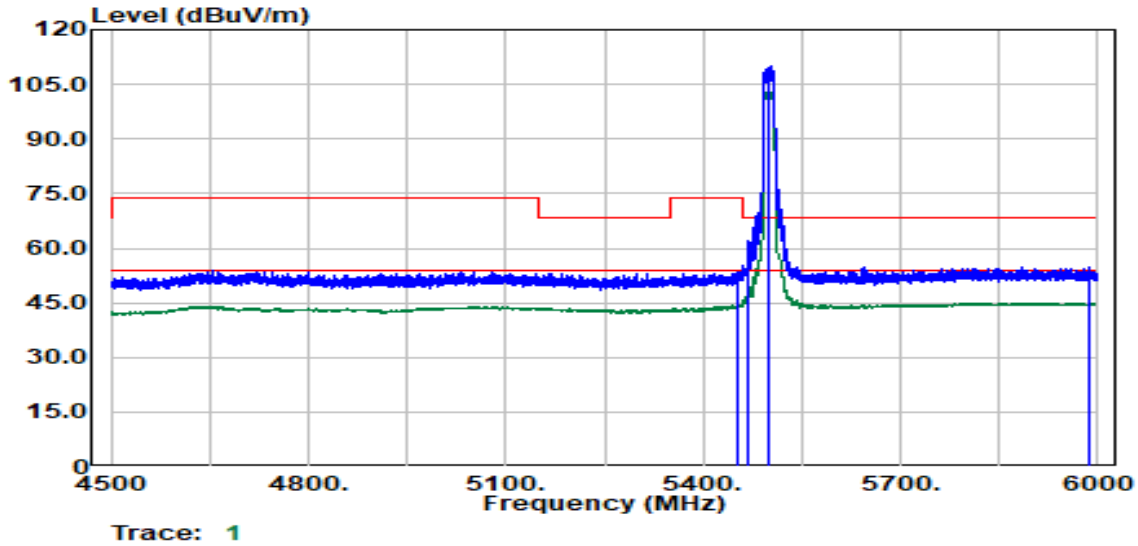


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5452.16 | Average | 34.20 | 10.85 | 45.05 | 54.00 | -8.95 |
| 5453.41 | Peak | 42.69 | 10.85 | 53.54 | 74.00 | -20.46 |
| 5469.41 | Peak | 51.50 | 10.87 | 62.36 | 68.20 | -5.84 |
| 5500.00 | Peak | 99.05 | 10.90 | 109.95 | -- | -- |
| 5500.00 | Average | 92.04 | 10.90 | 102.94 | -- | -- |
| 5986.25 | Peak | 42.31 | 12.38 | 54.69 | 68.20 | -13.51 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5700 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.75 | | |

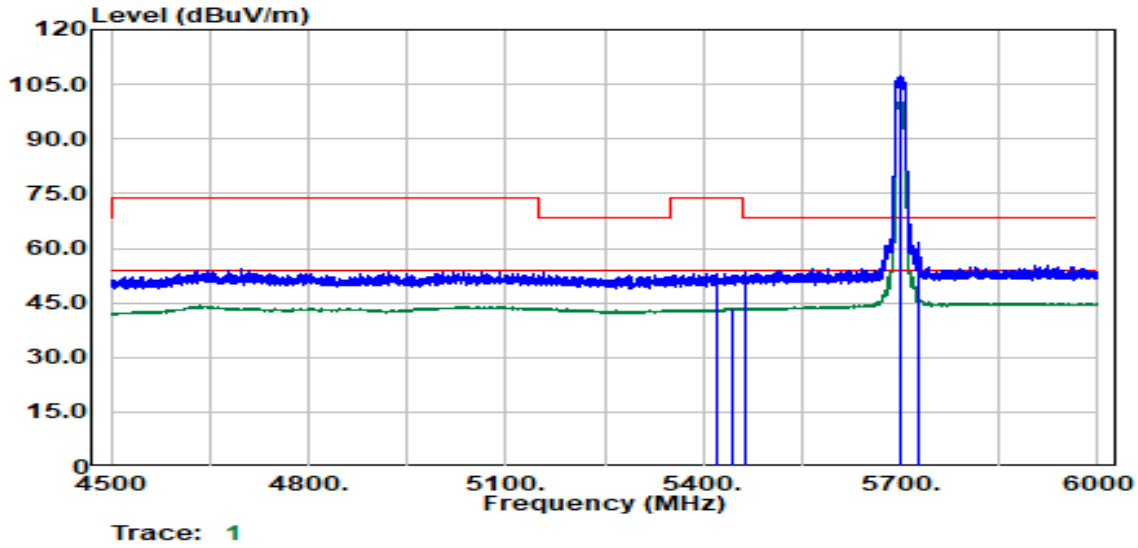


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5420.65 | Peak | 42.42 | 10.72 | 53.14 | 74.00 | -20.86 |
| 5443.41 | Average | 32.58 | 10.82 | 43.40 | 54.00 | -10.60 |
| 5463.91 | Peak | 42.44 | 10.86 | 53.30 | 68.20 | -14.90 |
| 5700.00 | Peak | 95.73 | 12.16 | 107.89 | -- | -- |
| 5700.00 | Average | 88.95 | 12.16 | 101.11 | -- | -- |
| 5727.21 | Peak | 49.57 | 12.31 | 61.88 | 68.20 | -6.32 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5700 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.75 | | |

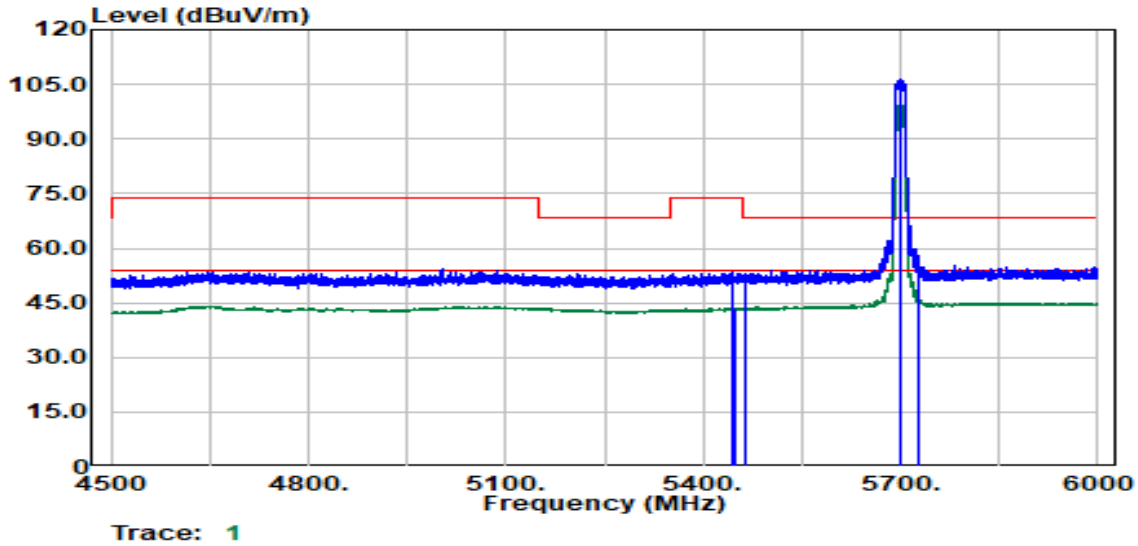


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5444.91 | Peak | 42.71 | 10.83 | 53.54 | 74.00 | -20.46 |
| 5449.91 | Average | 32.70 | 10.85 | 43.55 | 54.00 | -10.45 |
| 5463.91 | Peak | 41.93 | 10.86 | 52.79 | 68.20 | -15.41 |
| 5700.00 | Peak | 94.05 | 12.16 | 106.21 | -- | -- |
| 5700.00 | Average | 87.07 | 12.16 | 99.23 | -- | -- |
| 5726.71 | Peak | 45.80 | 12.30 | 58.10 | 68.20 | -10.10 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5500 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

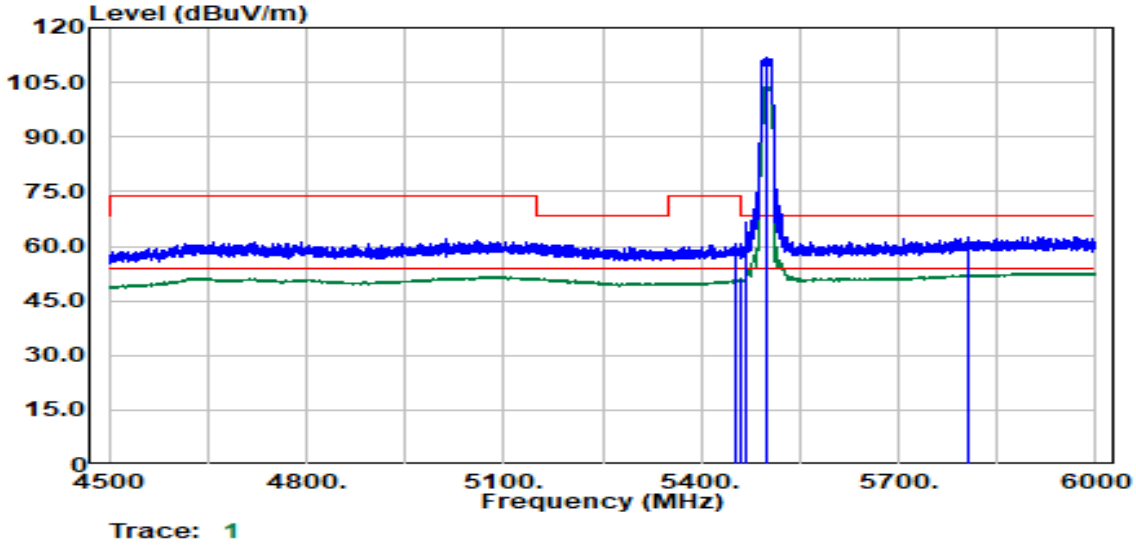


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5452.16 | Peak | 49.66 | 10.85 | 60.52 | 74.00 | -13.48 |
| 5459.66 | Average | 40.10 | 10.86 | 50.96 | 54.00 | -3.04 |
| 5468.41 | Peak | 56.07 | 10.87 | 66.94 | 68.20 | -1.26 |
| 5500.00 | Peak | 101.12 | 10.90 | 112.02 | -- | -- |
| 5500.00 | Average | 93.24 | 10.90 | 104.14 | -- | -- |
| 5804.22 | Peak | 50.03 | 12.65 | 62.68 | 68.20 | -5.52 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5500 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

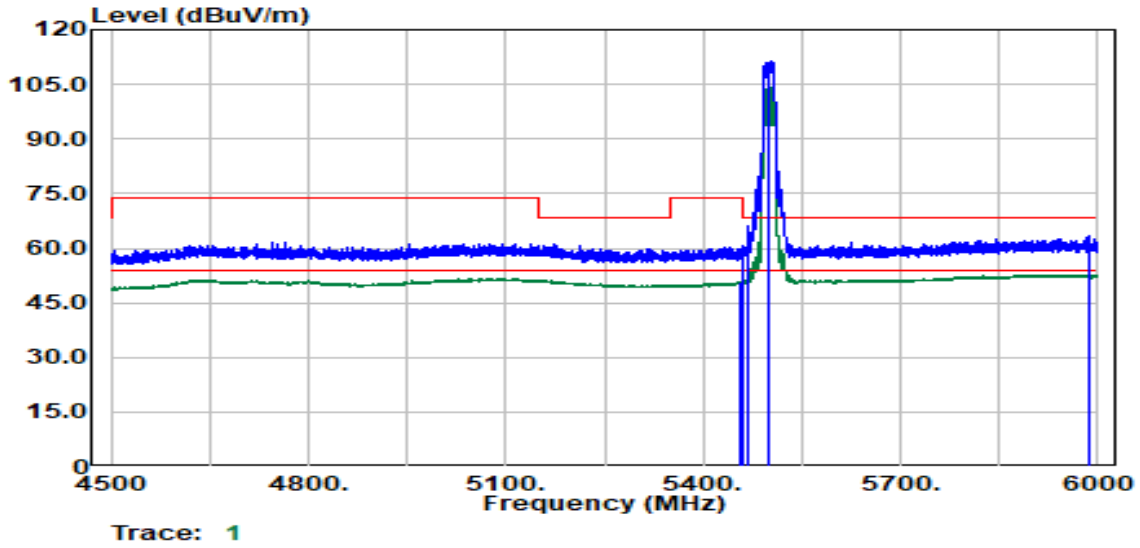


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5457.41 | Average | 39.90 | 10.86 | 50.75 | 54.00 | -3.25 |
| 5458.41 | Peak | 49.68 | 10.86 | 60.54 | 74.00 | -13.46 |
| 5469.91 | Peak | 55.03 | 10.87 | 65.90 | 68.20 | -2.30 |
| 5500.00 | Peak | 100.40 | 10.90 | 111.30 | -- | -- |
| 5500.00 | Average | 93.19 | 10.90 | 104.09 | -- | -- |
| 5988.00 | Peak | 51.08 | 12.38 | 63.46 | 68.20 | -4.74 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5700 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16 | | |

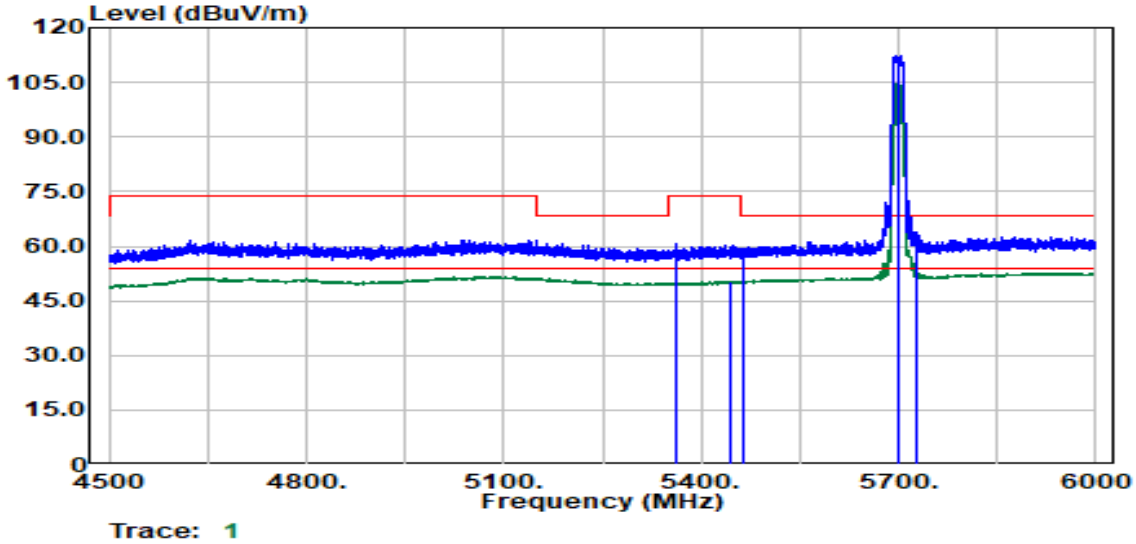


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5361.39 | Peak | 50.14 | 10.73 | 60.87 | 74.00 | -13.13 |
| 5445.91 | Average | 39.52 | 10.83 | 50.35 | 54.00 | -3.65 |
| 5463.66 | Peak | 48.58 | 10.86 | 59.45 | 68.20 | -8.75 |
| 5700.00 | Peak | 100.01 | 12.16 | 112.17 | -- | -- |
| 5700.00 | Average | 92.32 | 12.16 | 104.48 | -- | -- |
| 5726.96 | Peak | 51.48 | 12.31 | 63.78 | 68.20 | -4.42 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band3 | Temp./Humi. | :26.7/58 |
| Frequency | :5700 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16 | | |

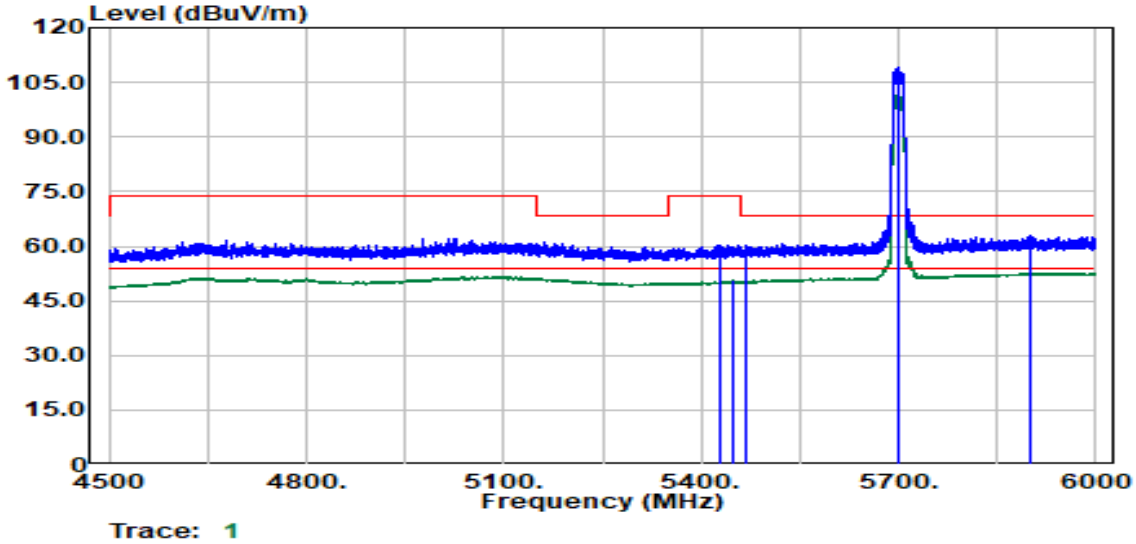


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5427.66 | Peak | 49.67 | 10.75 | 60.42 | 74.00 | -13.58 |
| 5447.66 | Average | 39.69 | 10.84 | 50.53 | 54.00 | -3.47 |
| 5468.91 | Peak | 49.27 | 10.87 | 60.14 | 68.20 | -8.06 |
| 5700.00 | Peak | 96.77 | 12.16 | 108.93 | -- | -- |
| 5700.00 | Average | 89.11 | 12.16 | 101.27 | -- | -- |
| 5899.73 | Peak | 50.64 | 12.36 | 63.01 | 68.20 | -5.19 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5510 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.75 | | |

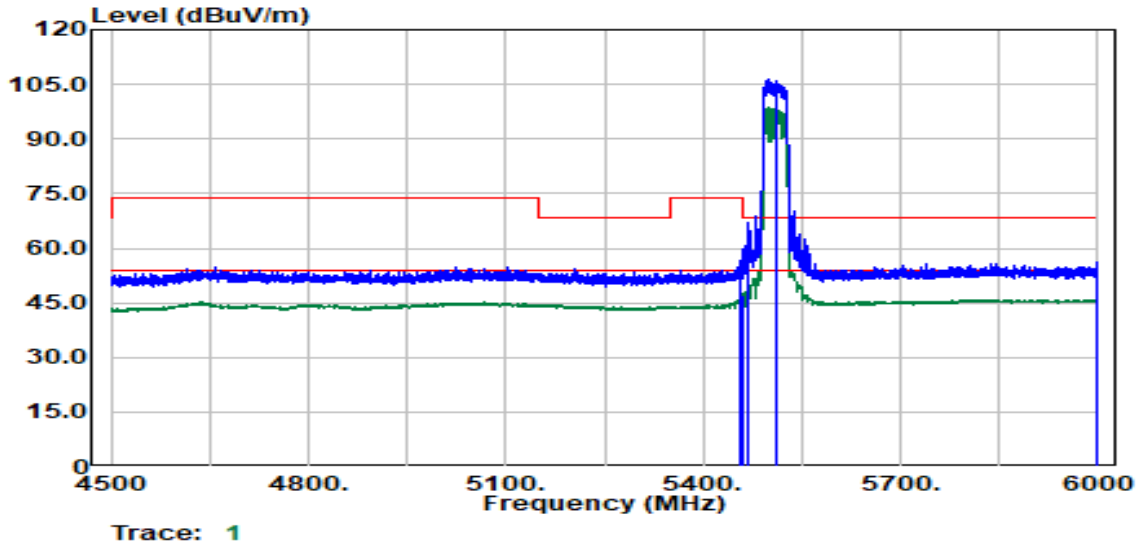


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5454.41 | Peak | 45.61 | 10.85 | 56.46 | 74.00 | -17.54 |
| 5459.41 | Average | 36.21 | 10.86 | 47.07 | 54.00 | -6.93 |
| 5469.16 | Peak | 56.44 | 10.87 | 67.31 | 68.20 | -0.89 |
| 5510.00 | Peak | 95.44 | 10.96 | 106.40 | -- | -- |
| 5510.00 | Average | 87.65 | 10.96 | 98.61 | -- | -- |
| 5999.75 | Peak | 43.60 | 12.39 | 55.99 | 68.20 | -12.21 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5510 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.75 | | |

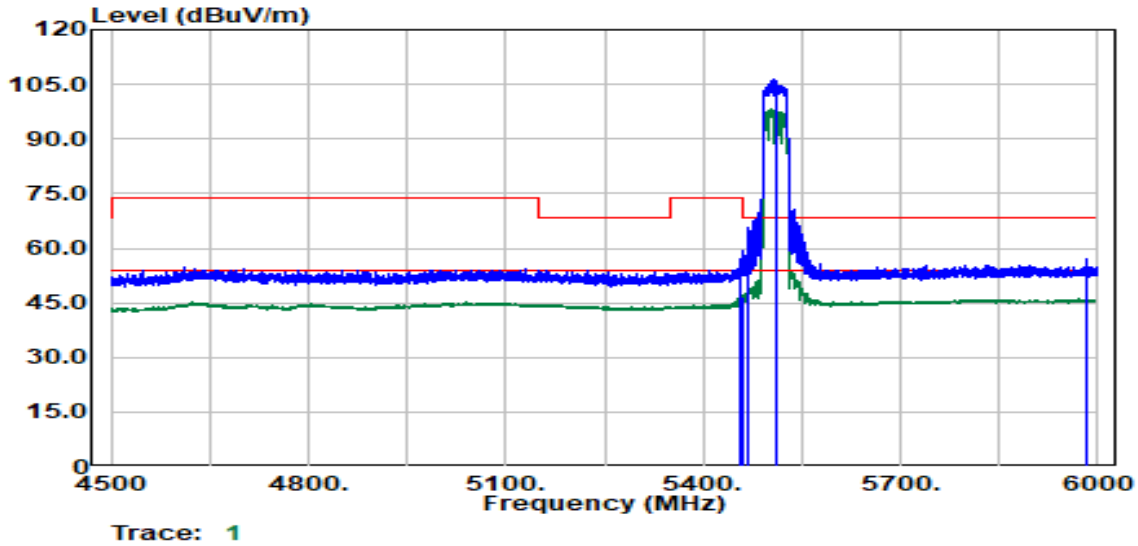


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5457.41 | Peak | 46.31 | 10.86 | 57.17 | 74.00 | -16.83 |
| 5459.41 | Average | 35.71 | 10.86 | 46.57 | 54.00 | -7.43 |
| 5469.16 | Peak | 55.11 | 10.87 | 65.98 | 68.20 | -2.22 |
| 5510.00 | Peak | 95.27 | 10.96 | 106.23 | -- | -- |
| 5510.00 | Average | 87.09 | 10.96 | 98.05 | -- | -- |
| 5982.50 | Peak | 44.82 | 12.38 | 57.20 | 68.20 | -11.00 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5670 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

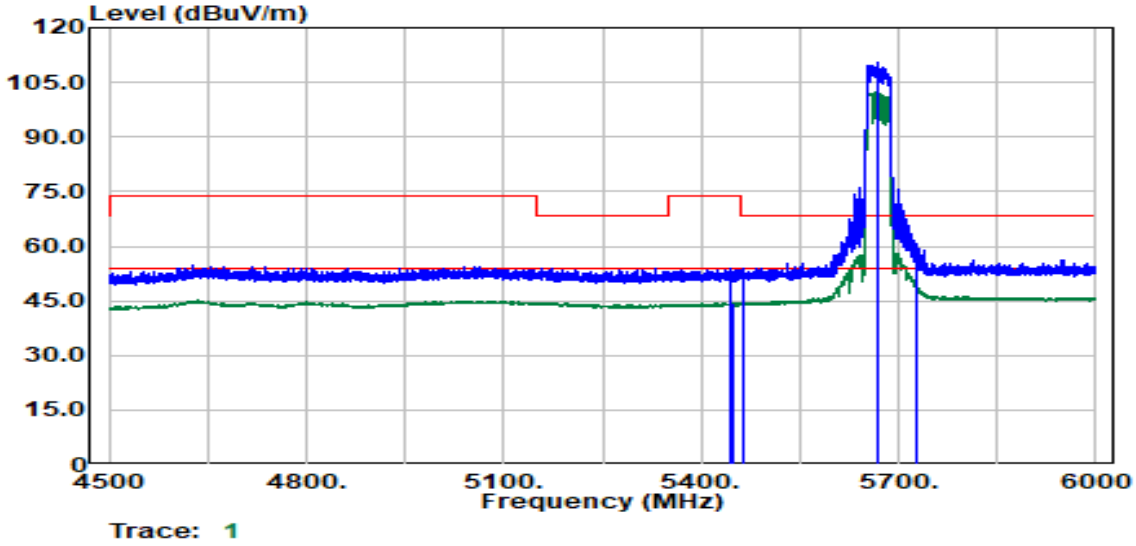


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5443.66 | Peak | 43.13 | 10.82 | 53.96 | 74.00 | -20.04 |
| 5448.16 | Average | 33.68 | 10.84 | 44.52 | 54.00 | -9.48 |
| 5463.16 | Peak | 43.07 | 10.86 | 53.93 | 68.20 | -14.27 |
| 5670.00 | Peak | 98.43 | 11.89 | 110.32 | -- | -- |
| 5670.00 | Average | 90.67 | 11.89 | 102.56 | -- | -- |
| 5726.46 | Peak | 48.38 | 12.30 | 60.68 | 68.20 | -7.52 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5670 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

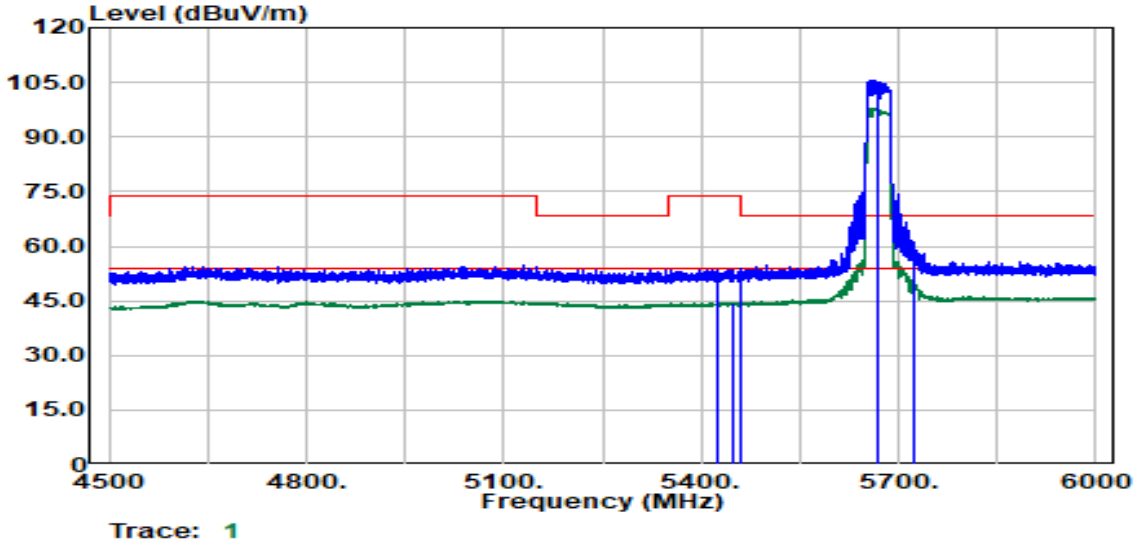


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5426.65 | Peak | 42.88 | 10.75 | 53.62 | 74.00 | -20.38 |
| 5447.66 | Average | 33.66 | 10.84 | 44.50 | 54.00 | -9.50 |
| 5461.91 | Peak | 42.91 | 10.86 | 53.78 | 68.20 | -14.42 |
| 5670.00 | Peak | 93.82 | 11.89 | 105.71 | -- | -- |
| 5670.00 | Average | 86.04 | 11.89 | 97.93 | -- | -- |
| 5725.00 | Peak | 47.28 | 12.29 | 59.57 | 68.20 | -8.63 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5530 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.75 | | |

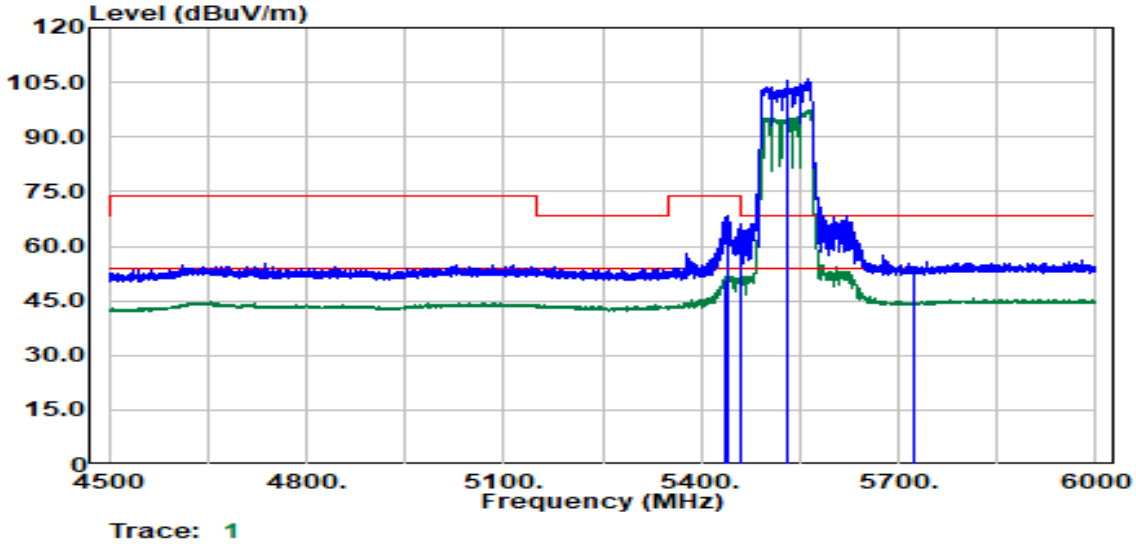


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5438.16 | Average | 40.00 | 10.80 | 50.80 | 54.00 | -3.20 |
| 5440.66 | Peak | 57.46 | 10.81 | 68.27 | 74.00 | -5.73 |
| 5460.41 | Peak | 54.35 | 10.86 | 65.21 | 68.20 | -2.99 |
| 5530.00 | Peak | 94.73 | 11.07 | 105.81 | -- | -- |
| 5530.00 | Average | 86.33 | 11.07 | 97.41 | -- | -- |
| 5725.00 | Peak | 40.67 | 12.30 | 52.97 | 68.20 | -15.23 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5530 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14.75 | | |

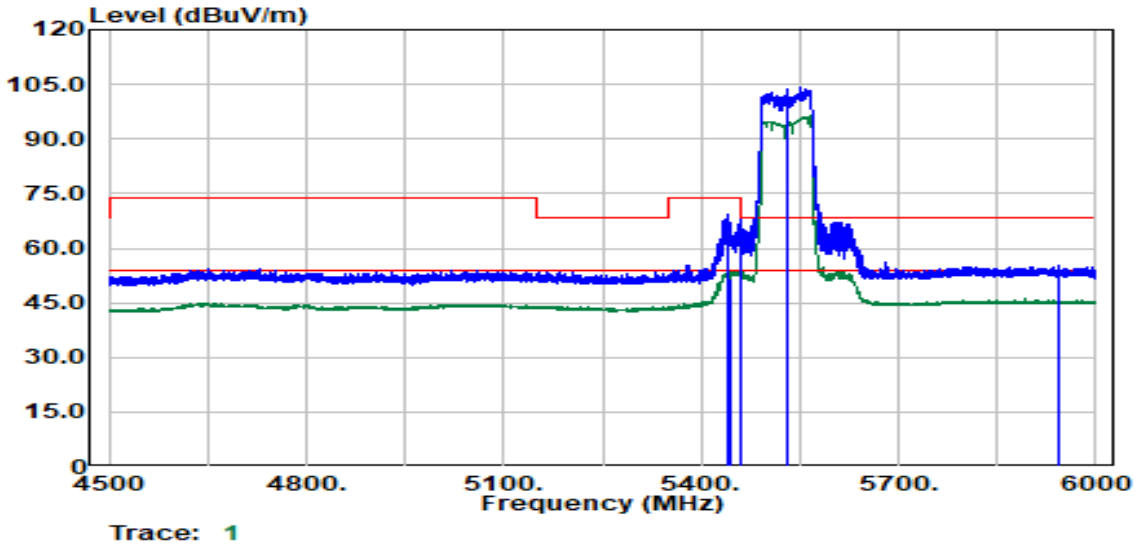


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5440.91 | Peak | 58.67 | 10.81 | 69.48 | 74.00 | -4.52 |
| 5444.91 | Average | 40.99 | 10.83 | 51.82 | 54.00 | -2.18 |
| 5461.16 | Peak | 56.45 | 10.86 | 67.31 | 68.20 | -0.89 |
| 5530.00 | Peak | 92.91 | 11.07 | 103.98 | -- | -- |
| 5530.00 | Average | 85.25 | 11.07 | 96.32 | -- | -- |
| 5942.74 | Peak | 42.70 | 12.35 | 55.05 | 68.20 | -13.15 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5610 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18.25 | | |

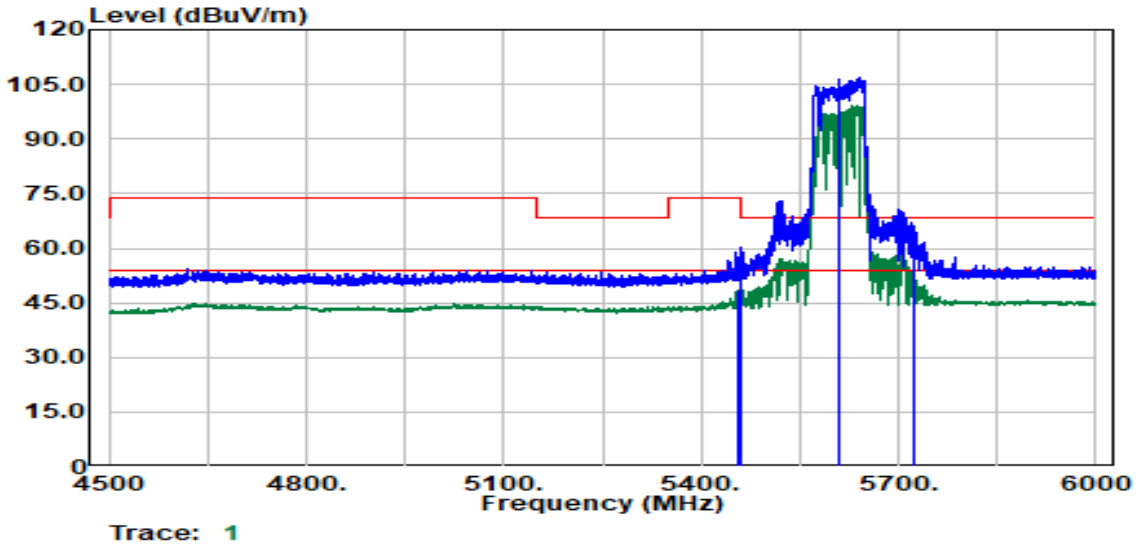


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5456.41 | Average | 37.55 | 10.86 | 48.40 | 54.00 | -5.60 |
| 5458.66 | Peak | 48.19 | 10.86 | 59.05 | 74.00 | -14.95 |
| 5460.16 | Peak | 49.18 | 10.86 | 60.04 | 68.20 | -8.16 |
| 5610.00 | Peak | 95.53 | 11.50 | 107.03 | -- | -- |
| 5610.00 | Average | 87.63 | 11.50 | 99.13 | -- | -- |
| 5725.00 | Peak | 54.48 | 12.30 | 66.77 | 68.20 | -1.43 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :25.9/56 |
| Frequency | :5610 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :18.25 | | |

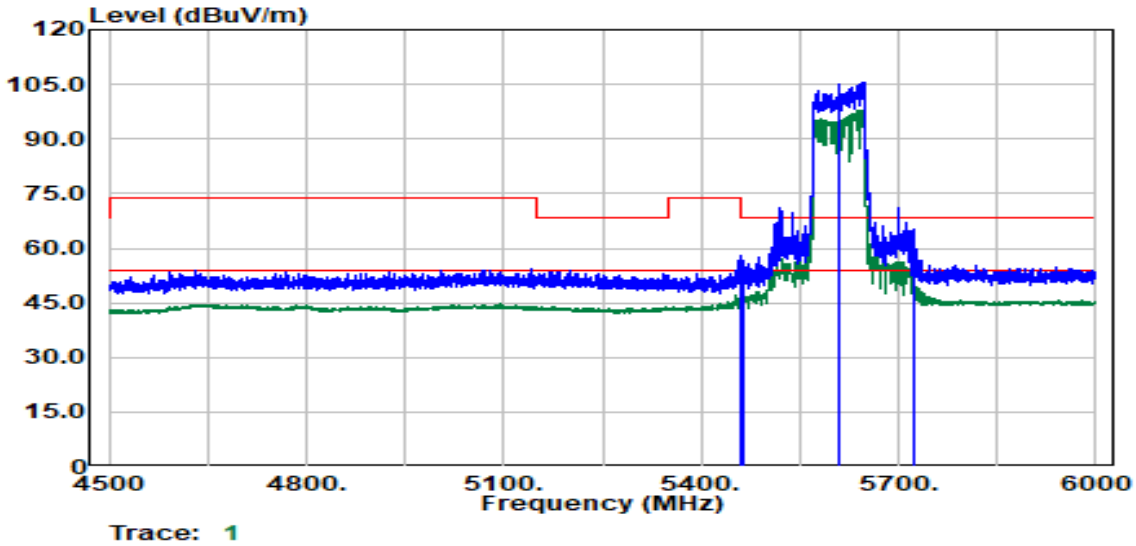


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5458.91 | Average | 36.71 | 10.86 | 47.56 | 54.00 | -6.44 |
| 5459.41 | Peak | 46.99 | 10.86 | 57.85 | 74.00 | -16.15 |
| 5462.66 | Peak | 45.93 | 10.86 | 56.79 | 68.20 | -11.41 |
| 5610.00 | Peak | 94.01 | 11.50 | 105.52 | -- | -- |
| 5610.00 | Average | 86.33 | 11.50 | 97.84 | -- | -- |
| 5725.00 | Peak | 53.20 | 12.30 | 65.50 | 68.20 | -2.70 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5500 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

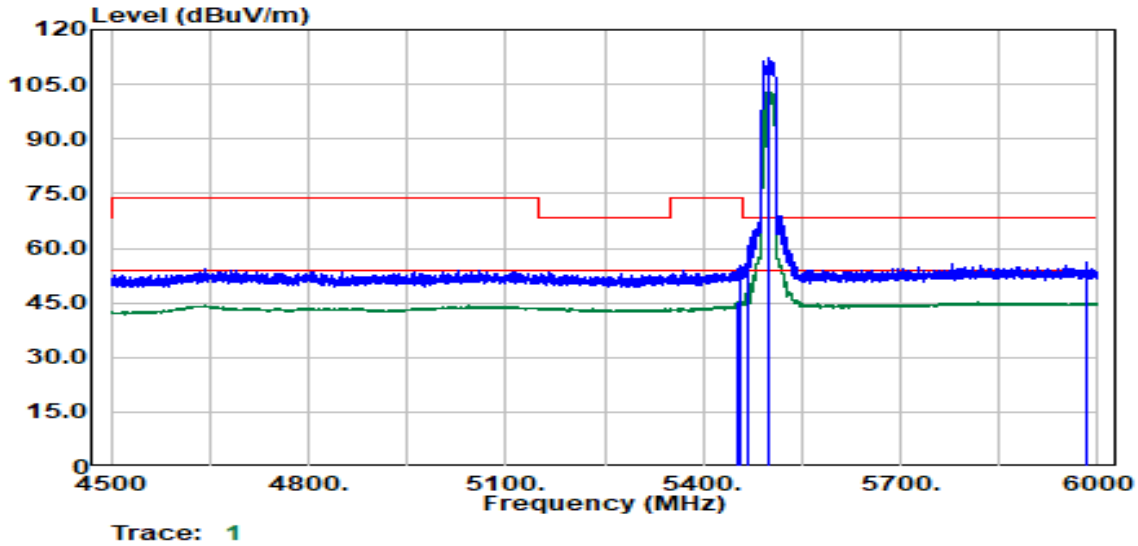


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5451.16 | Average | 34.53 | 10.85 | 45.38 | 54.00 | -8.62 |
| 5455.91 | Peak | 44.57 | 10.86 | 55.42 | 74.00 | -18.58 |
| 5468.91 | Peak | 50.25 | 10.87 | 61.12 | 68.20 | -7.08 |
| 5500.00 | Peak | 101.82 | 10.90 | 112.72 | -- | -- |
| 5500.00 | Average | 92.32 | 10.90 | 103.22 | -- | -- |
| 5981.50 | Peak | 43.55 | 12.38 | 55.93 | 68.20 | -12.27 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5500 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

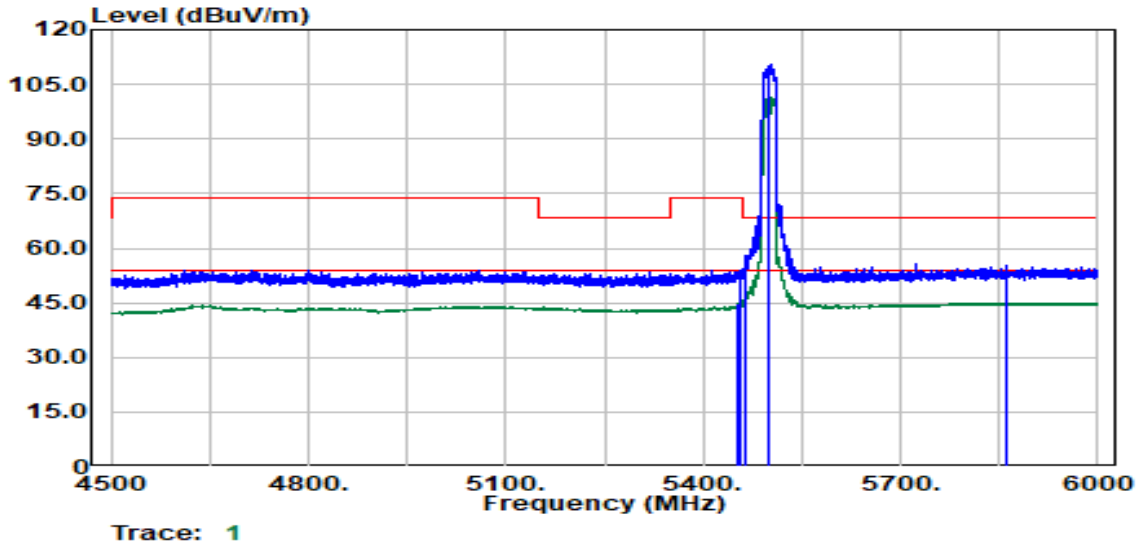


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5453.16 | Average | 33.97 | 10.85 | 44.83 | 54.00 | -9.17 |
| 5455.41 | Peak | 43.15 | 10.86 | 54.00 | 74.00 | -20.00 |
| 5465.41 | Peak | 47.09 | 10.87 | 57.96 | 68.20 | -10.24 |
| 5500.00 | Peak | 99.73 | 10.90 | 110.63 | -- | -- |
| 5500.00 | Average | 90.65 | 10.90 | 101.55 | -- | -- |
| 5862.48 | Peak | 42.85 | 12.44 | 55.29 | 68.20 | -12.91 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax20/Band3 RU106/53 | Temp./Humi. | :24.1/59 |
| Frequency | :5500 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

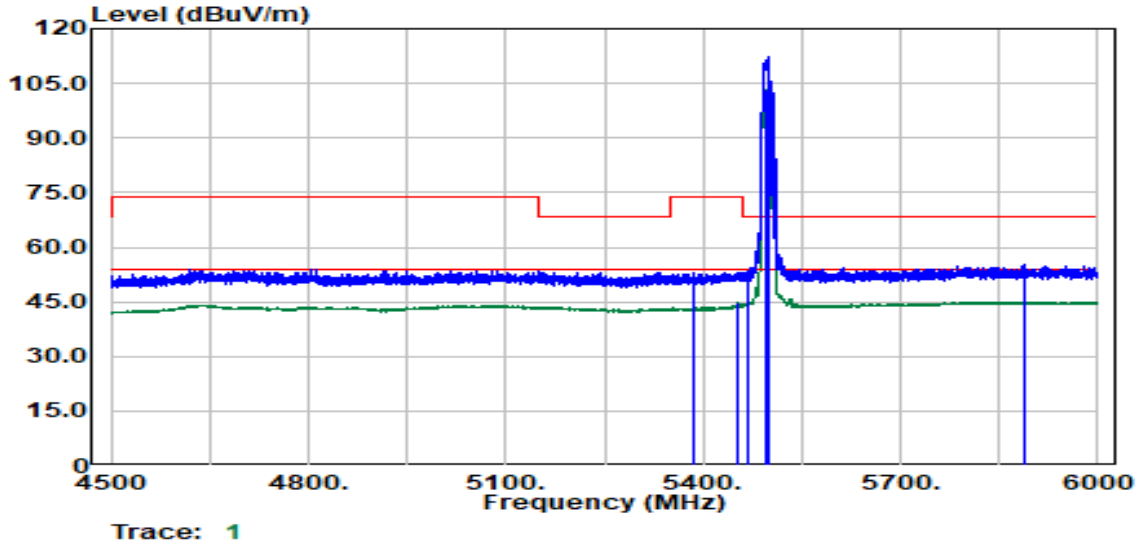


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5383.65 | Peak | 42.35 | 10.67 | 53.02 | 74.00 | -20.98 |
| 5451.41 | Average | 34.12 | 10.85 | 44.97 | 54.00 | -9.03 |
| 5468.41 | Peak | 42.34 | 10.87 | 53.21 | 68.20 | -14.99 |
| 5496.92 | Average | 92.42 | 10.90 | 103.32 | -- | -- |
| 5497.66 | Peak | 101.46 | 10.90 | 112.36 | -- | -- |
| 5889.73 | Peak | 42.92 | 12.38 | 55.30 | 68.20 | -12.90 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax20/Band3 RU106/53 | Temp./Humi. | :24.1/59 |
| Frequency | :5500 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

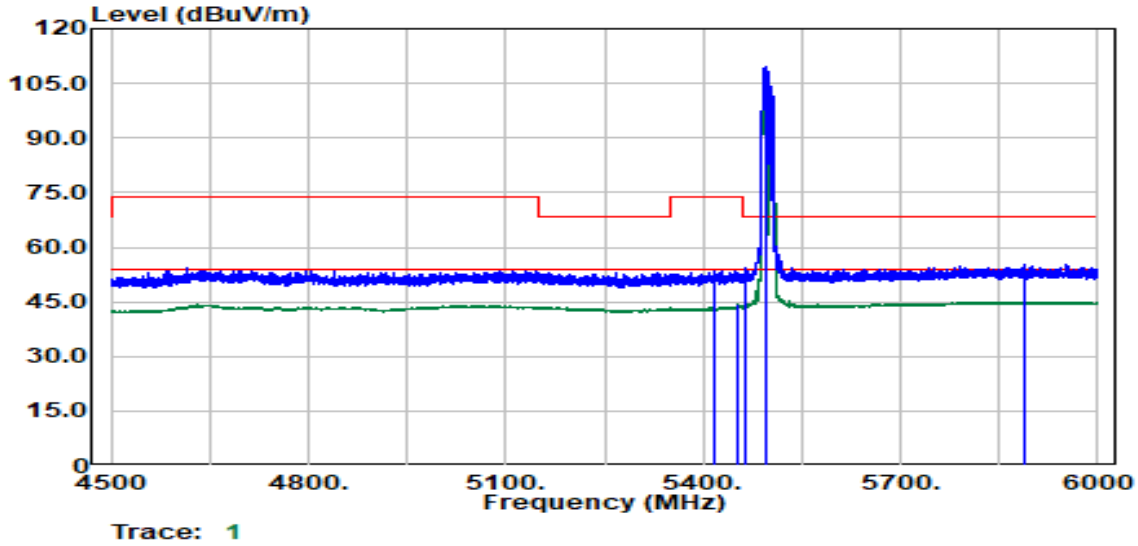


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5417.40 | Peak | 42.95 | 10.71 | 53.65 | 74.00 | -20.35 |
| 5450.66 | Average | 33.62 | 10.85 | 44.47 | 54.00 | -9.53 |
| 5465.66 | Peak | 43.55 | 10.87 | 54.41 | 68.20 | -13.79 |
| 5494.67 | Peak | 98.77 | 10.89 | 109.66 | -- | -- |
| 5496.66 | Average | 90.52 | 10.90 | 101.42 | -- | -- |
| 5887.73 | Peak | 42.72 | 12.39 | 55.11 | 68.20 | -13.09 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5700 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

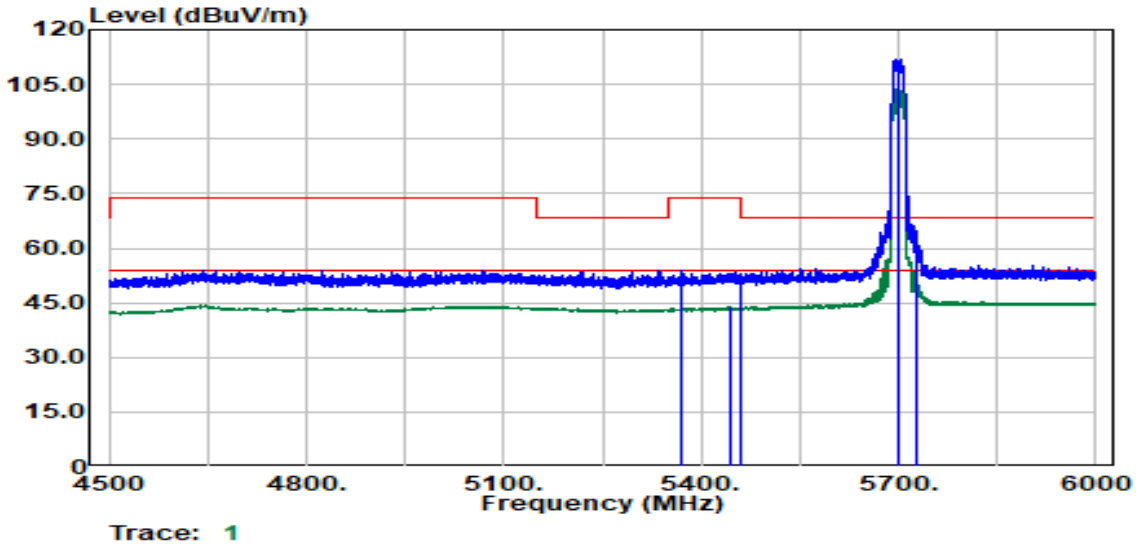


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5370.40 | Peak | 43.09 | 10.71 | 53.80 | 74.00 | -20.20 |
| 5445.16 | Average | 33.11 | 10.83 | 43.94 | 54.00 | -10.06 |
| 5459.91 | Peak | 42.07 | 10.86 | 52.93 | 74.00 | -21.07 |
| 5700.00 | Peak | 99.75 | 12.16 | 111.91 | -- | -- |
| 5700.00 | Average | 91.76 | 12.16 | 103.92 | -- | -- |
| 5727.21 | Peak | 52.88 | 12.31 | 65.19 | 68.20 | -3.01 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5700 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

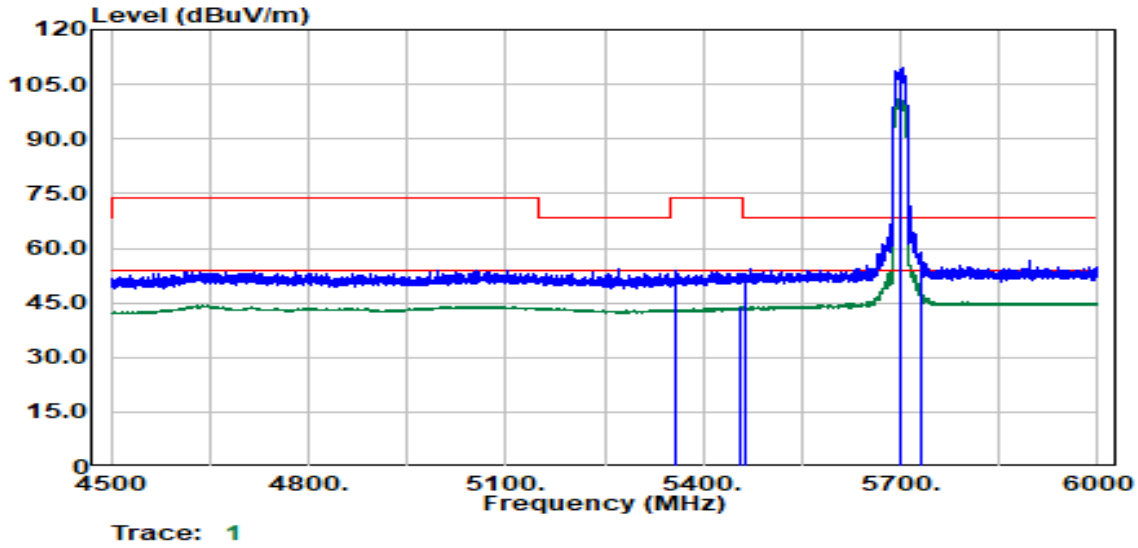


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5358.14 | Peak | 43.15 | 10.74 | 53.89 | 74.00 | -20.11 |
| 5456.91 | Average | 33.03 | 10.86 | 43.89 | 54.00 | -10.11 |
| 5462.41 | Peak | 42.13 | 10.86 | 52.99 | 68.20 | -15.21 |
| 5700.00 | Peak | 97.25 | 12.16 | 109.41 | -- | -- |
| 5700.00 | Average | 88.73 | 12.16 | 100.89 | -- | -- |
| 5729.46 | Peak | 46.63 | 12.32 | 58.95 | 68.20 | -9.25 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band3 RU160/54 | Temp./Humi. | :24.1/59 |
| Frequency | :5700 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.25 | | |

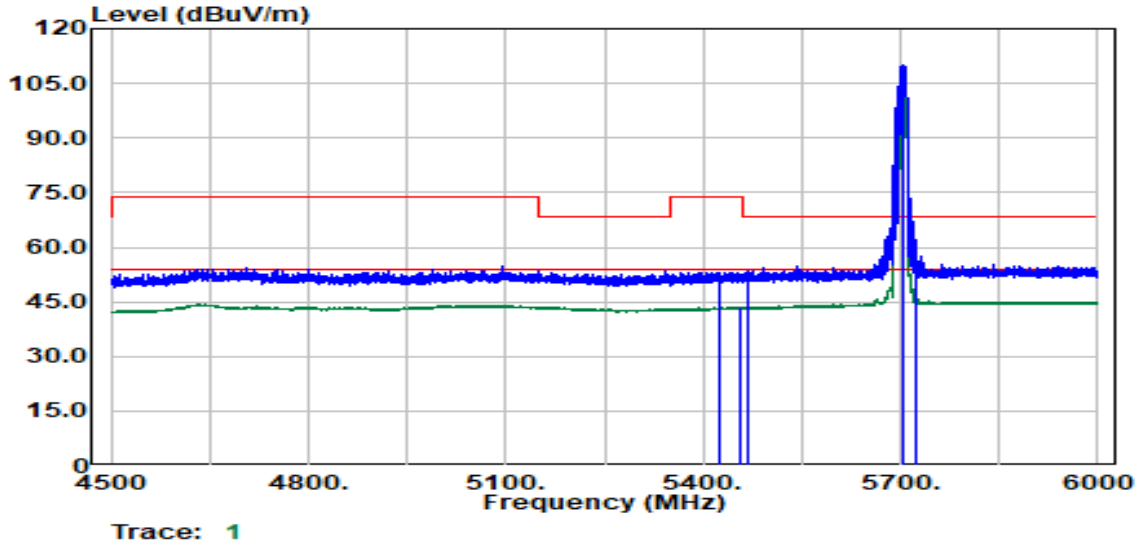


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5424.65 | Peak | 42.40 | 10.74 | 53.14 | 74.00 | -20.86 |
| 5455.66 | Average | 32.65 | 10.86 | 43.50 | 54.00 | -10.50 |
| 5466.16 | Peak | 42.41 | 10.87 | 53.28 | 68.20 | -14.92 |
| 5701.95 | Peak | 97.94 | 12.17 | 110.11 | -- | -- |
| 5703.20 | Average | 89.91 | 12.18 | 102.09 | -- | -- |
| 5725.20 | Peak | 48.03 | 12.30 | 60.33 | 68.20 | -7.87 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band3 RU160/54 | Temp./Humi. | :24.1/59 |
| Frequency | :5700 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :12.25 | | |

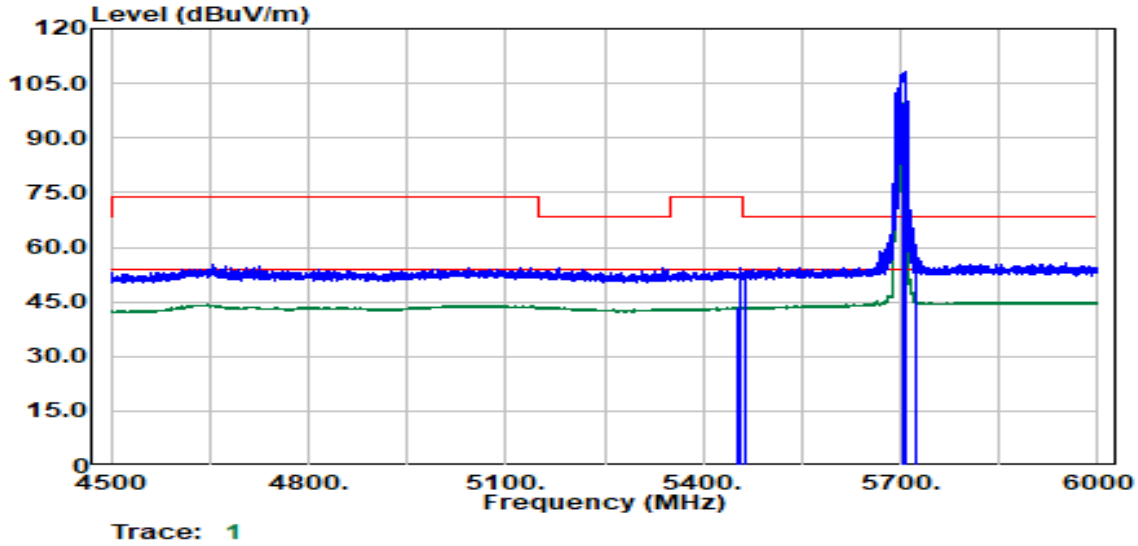


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5451.66 | Average | 32.66 | 10.85 | 43.51 | 54.00 | -10.49 |
| 5457.66 | Peak | 43.35 | 10.86 | 54.20 | 74.00 | -19.80 |
| 5465.91 | Peak | 42.54 | 10.87 | 53.40 | 68.20 | -14.80 |
| 5702.45 | Average | 87.28 | 12.17 | 99.45 | -- | -- |
| 5705.95 | Peak | 96.18 | 12.19 | 108.37 | -- | -- |
| 5725.00 | Peak | 42.92 | 12.30 | 55.22 | 68.20 | -12.98 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5510 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.75 | | |

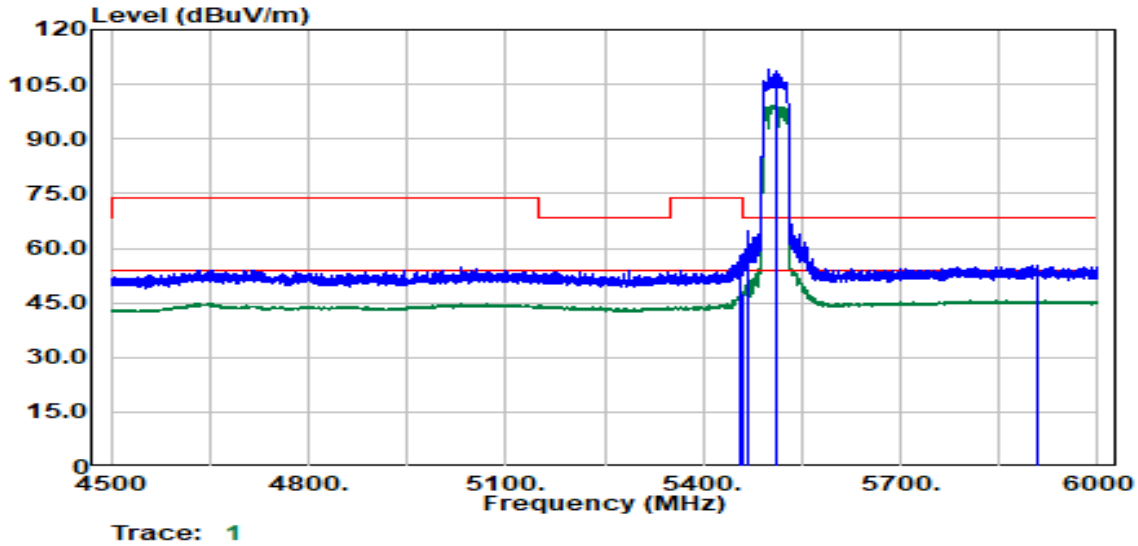


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5456.66 | Peak | 47.08 | 10.86 | 57.94 | 74.00 | -16.06 |
| 5458.41 | Average | 36.82 | 10.86 | 47.68 | 54.00 | -6.32 |
| 5466.91 | Peak | 54.26 | 10.87 | 65.12 | 68.20 | -3.08 |
| 5510.00 | Peak | 98.17 | 10.96 | 109.13 | -- | -- |
| 5510.00 | Average | 88.57 | 10.96 | 99.52 | -- | -- |
| 5906.48 | Peak | 42.72 | 12.36 | 55.08 | 68.20 | -13.12 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5510 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.75 | | |

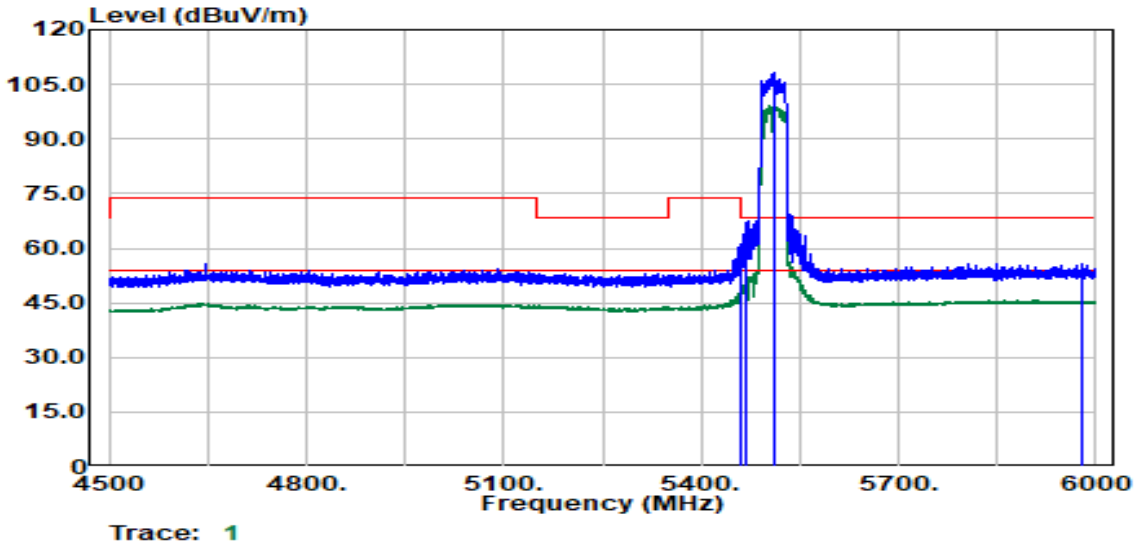


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5459.41 | Average | 37.20 | 10.86 | 48.06 | 54.00 | -5.94 |
| 5459.66 | Peak | 50.08 | 10.86 | 60.94 | 74.00 | -13.06 |
| 5467.41 | Peak | 56.79 | 10.87 | 67.65 | 68.20 | -0.55 |
| 5510.00 | Peak | 97.74 | 10.96 | 108.69 | -- | -- |
| 5510.00 | Average | 88.09 | 10.96 | 99.05 | -- | -- |
| 5978.75 | Peak | 43.39 | 12.37 | 55.76 | 68.20 | -12.44 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 RU242/61 | Temp./Humi. | :24.1/59 |
| Frequency | :5510 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

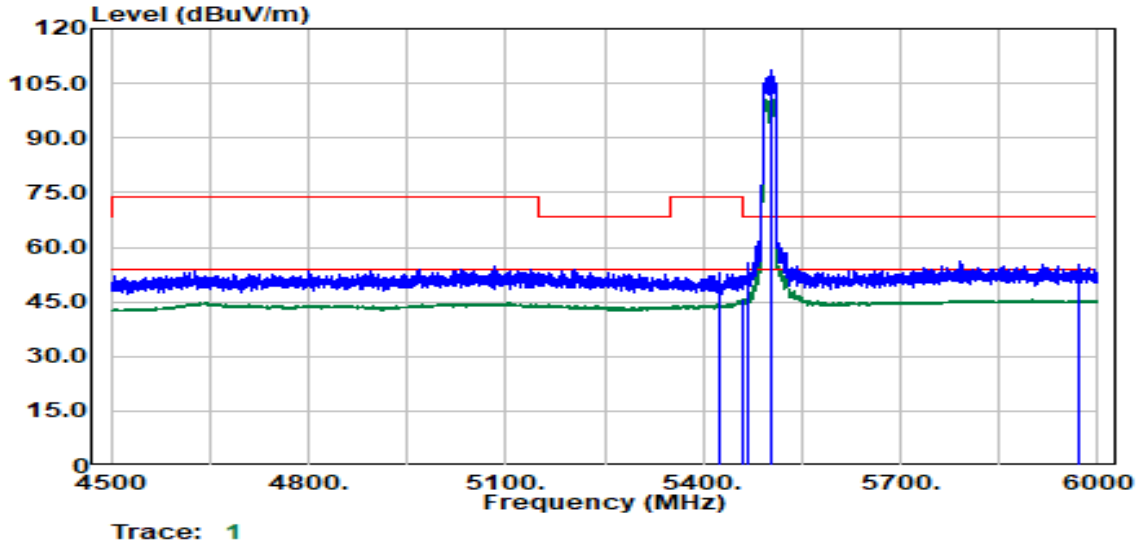


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5425.40 | Peak | 42.90 | 10.74 | 53.65 | 74.00 | -20.35 |
| 5459.16 | Average | 34.73 | 10.86 | 45.59 | 54.00 | -8.41 |
| 5467.41 | Peak | 45.19 | 10.87 | 56.06 | 68.20 | -12.14 |
| 5502.42 | Peak | 98.12 | 10.91 | 109.04 | -- | -- |
| 5503.17 | Average | 90.83 | 10.92 | 101.75 | -- | -- |
| 5971.75 | Peak | 43.30 | 12.37 | 55.67 | 68.20 | -12.53 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 RU242/61 | Temp./Humi. | :24.1/59 |
| Frequency | :5510 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :14 | | |

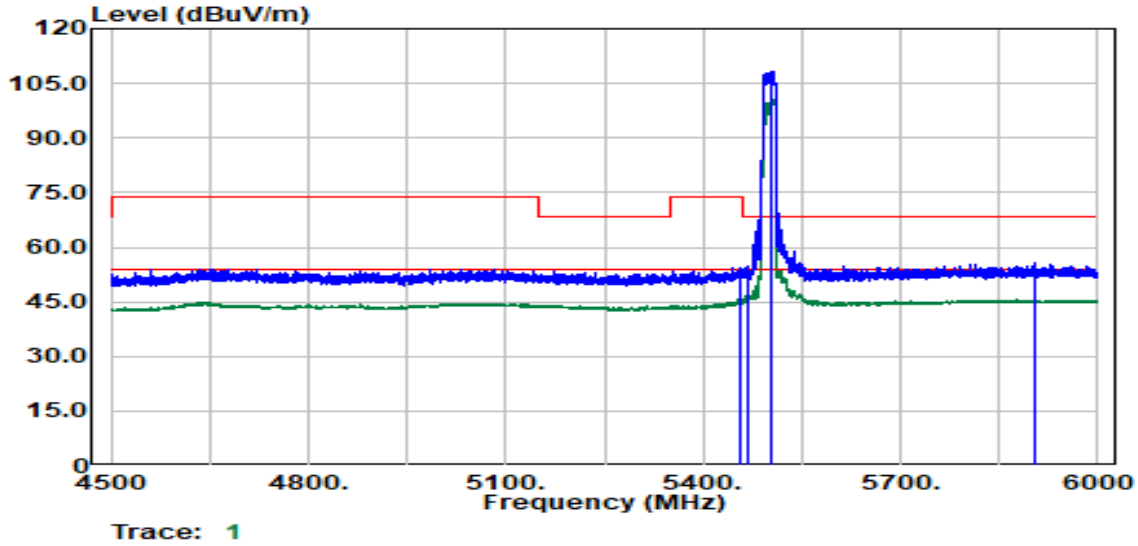


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5455.66 | Peak | 43.58 | 10.86 | 54.43 | 74.00 | -19.57 |
| 5456.91 | Average | 35.44 | 10.86 | 46.30 | 54.00 | -7.70 |
| 5469.91 | Peak | 43.72 | 10.87 | 54.59 | 68.20 | -13.61 |
| 5503.67 | Average | 89.47 | 10.92 | 100.39 | -- | -- |
| 5503.92 | Peak | 97.30 | 10.92 | 108.23 | -- | -- |
| 5904.98 | Peak | 43.13 | 12.36 | 55.49 | 68.20 | -12.71 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5670 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

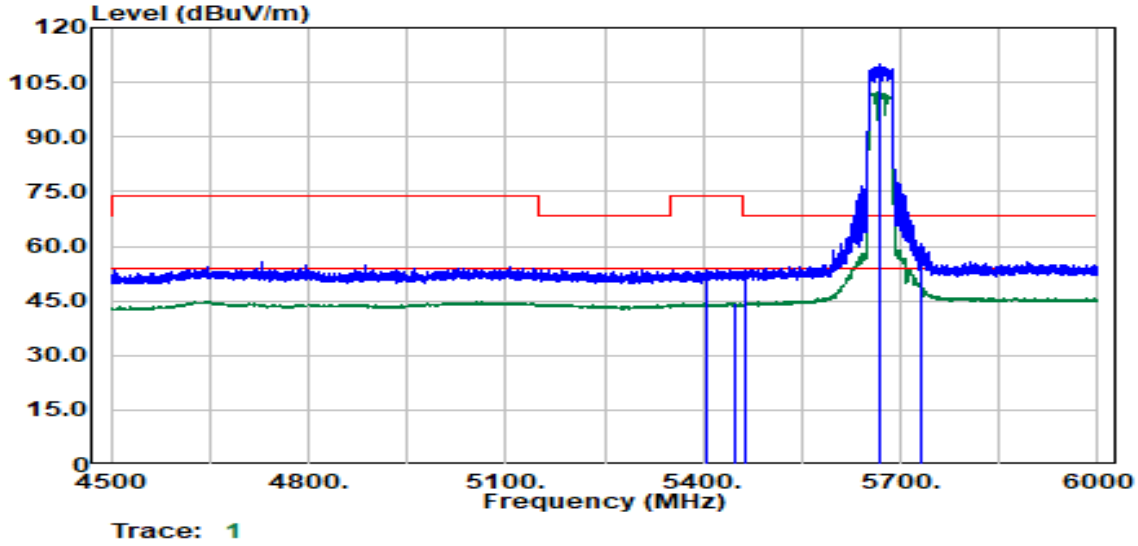


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5404.65 | Peak | 42.94 | 10.65 | 53.59 | 74.00 | -20.41 |
| 5448.66 | Average | 33.54 | 10.84 | 44.39 | 54.00 | -9.61 |
| 5463.41 | Peak | 42.42 | 10.86 | 53.28 | 68.20 | -14.92 |
| 5670.00 | Peak | 98.50 | 11.89 | 110.39 | -- | -- |
| 5670.00 | Average | 90.52 | 11.89 | 102.41 | -- | -- |
| 5731.46 | Peak | 48.13 | 12.33 | 60.46 | 68.20 | -7.74 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5670 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

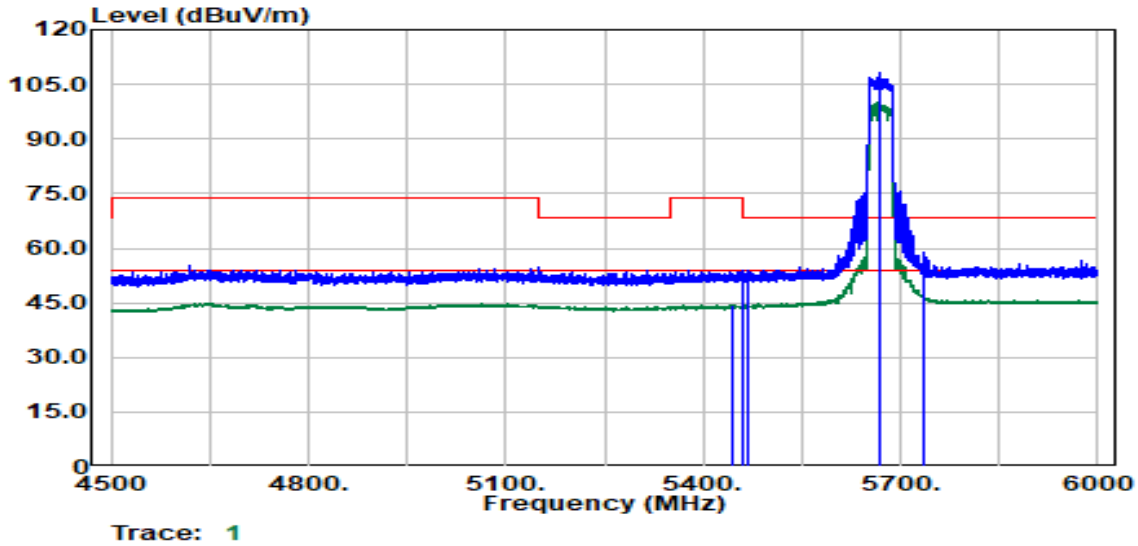


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5443.91 | Average | 33.55 | 10.82 | 44.37 | 54.00 | -9.63 |
| 5459.16 | Peak | 43.02 | 10.86 | 53.88 | 74.00 | -20.12 |
| 5469.16 | Peak | 42.96 | 10.87 | 53.83 | 68.20 | -14.37 |
| 5670.00 | Peak | 96.83 | 11.89 | 108.72 | -- | -- |
| 5670.00 | Average | 88.06 | 11.89 | 99.95 | -- | -- |
| 5735.96 | Peak | 46.34 | 12.35 | 58.69 | 68.20 | -9.51 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 RU242/62 | Temp./Humi. | :24.1/59 |
| Frequency | :5670 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13.75 | | |

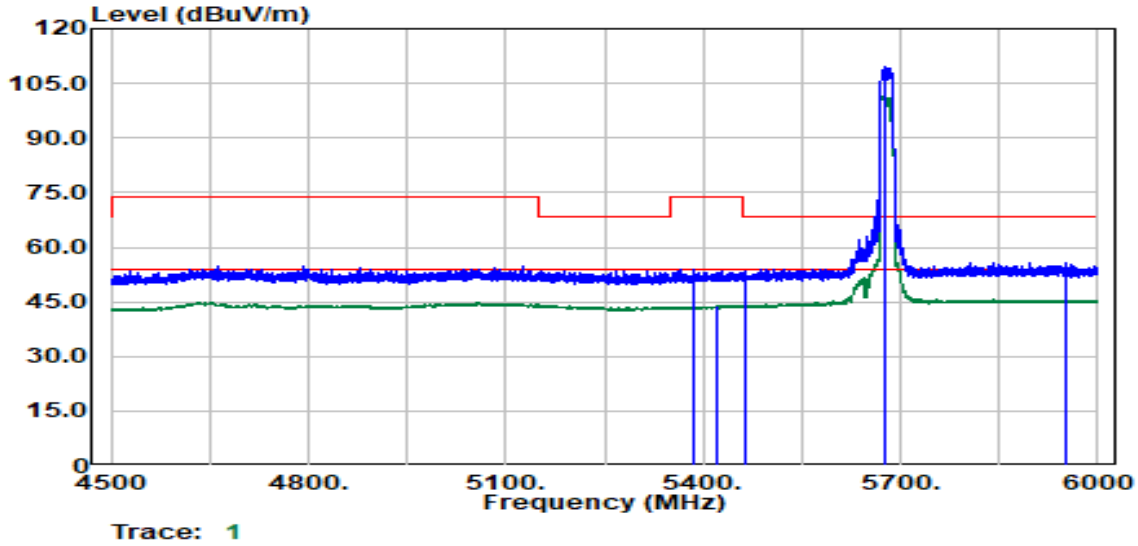


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5384.40 | Peak | 43.36 | 10.67 | 54.03 | 74.00 | -19.97 |
| 5421.90 | Average | 33.27 | 10.73 | 43.99 | 54.00 | -10.01 |
| 5464.16 | Peak | 42.53 | 10.86 | 53.40 | 68.20 | -14.80 |
| 5675.45 | Average | 89.57 | 11.94 | 101.51 | -- | -- |
| 5678.20 | Peak | 97.75 | 11.96 | 109.72 | -- | -- |
| 5950.74 | Peak | 43.49 | 12.35 | 55.84 | 68.20 | -12.36 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax40/Band3 RU242/62 | Temp./Humi. | :24.1/59 |
| Frequency | :5670 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :13.75 | | |

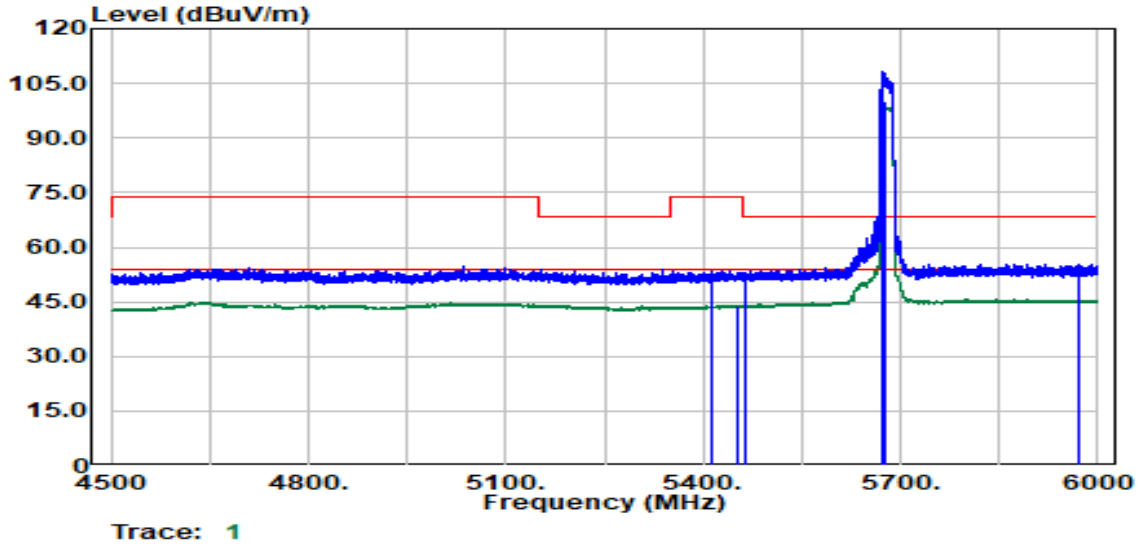


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5414.40 | Peak | 42.74 | 10.69 | 53.43 | 74.00 | -20.57 |
| 5452.16 | Average | 33.27 | 10.85 | 44.12 | 54.00 | -9.88 |
| 5463.16 | Peak | 42.07 | 10.86 | 52.93 | 68.20 | -15.27 |
| 5672.45 | Peak | 96.19 | 11.91 | 108.10 | -- | -- |
| 5675.47 | Average | 87.93 | 11.94 | 99.87 | -- | -- |
| 5971.75 | Peak | 43.01 | 12.37 | 55.38 | 68.20 | -12.82 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5530 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.5 | | |

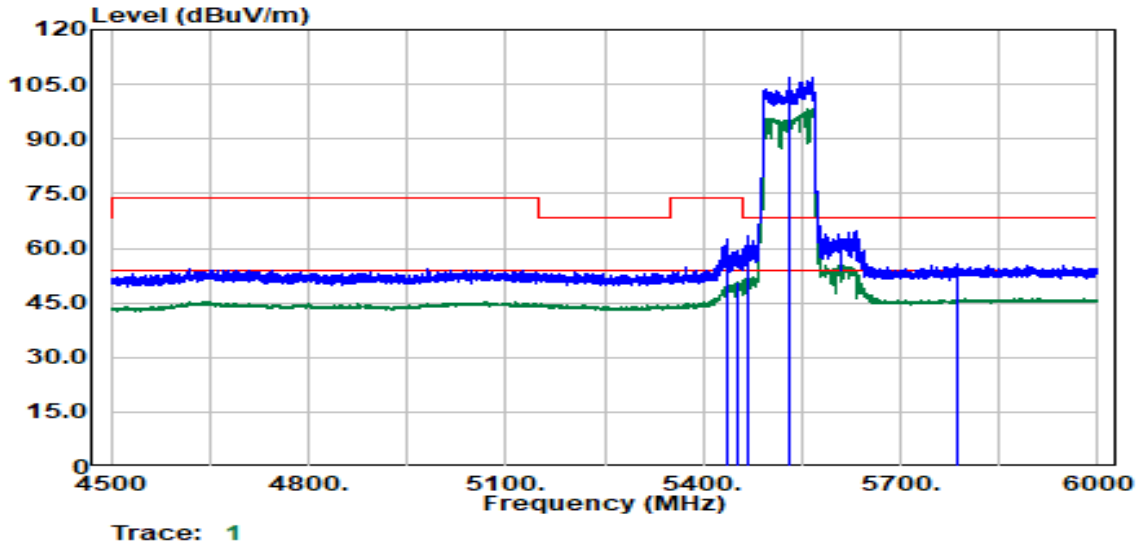


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5434.91 | Peak | 51.61 | 10.78 | 62.40 | 74.00 | -11.60 |
| 5451.41 | Average | 40.01 | 10.85 | 50.86 | 54.00 | -3.14 |
| 5466.66 | Peak | 53.09 | 10.87 | 63.96 | 68.20 | -4.24 |
| 5530.00 | Peak | 96.12 | 11.07 | 107.20 | -- | -- |
| 5530.00 | Average | 87.13 | 11.07 | 98.21 | -- | -- |
| 5784.96 | Peak | 42.95 | 12.60 | 55.55 | 68.20 | -12.65 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5530 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.5 | | |

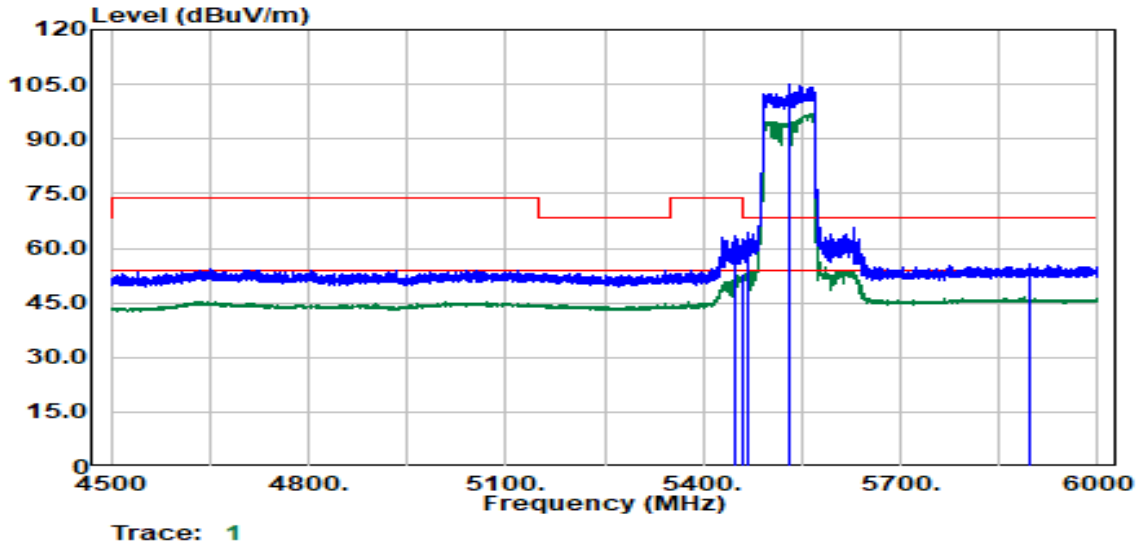


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5448.91 | Peak | 52.73 | 10.85 | 63.58 | 74.00 | -10.42 |
| 5459.66 | Average | 42.09 | 10.86 | 52.94 | 54.00 | -1.06 |
| 5469.16 | Peak | 53.92 | 10.87 | 64.79 | 68.20 | -3.41 |
| 5530.00 | Peak | 94.57 | 11.07 | 105.64 | -- | -- |
| 5530.00 | Average | 85.75 | 11.07 | 96.82 | -- | -- |
| 5897.48 | Peak | 43.26 | 12.37 | 55.63 | 68.20 | -12.57 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 RU484/65 | Temp./Humi. | :25.3/56 |
| Frequency | :5530 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

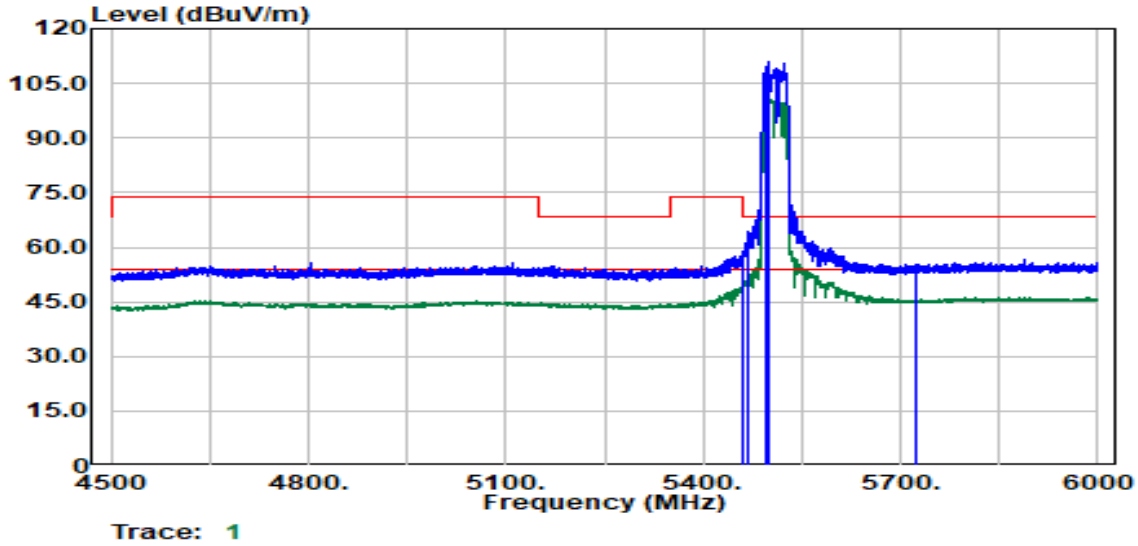


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5458.66 | Average | 38.89 | 10.86 | 49.75 | 54.00 | -4.25 |
| 5459.66 | Peak | 47.62 | 10.86 | 58.48 | 74.00 | -15.52 |
| 5468.41 | Peak | 53.74 | 10.87 | 64.61 | 68.20 | -3.59 |
| 5496.67 | Average | 90.01 | 10.90 | 100.90 | -- | -- |
| 5498.67 | Peak | 100.25 | 10.90 | 111.15 | -- | -- |
| 5725.00 | Peak | 41.10 | 12.30 | 53.40 | 68.20 | -14.80 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 RU484/65 | Temp./Humi. | :25.3/56 |
| Frequency | :5530 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

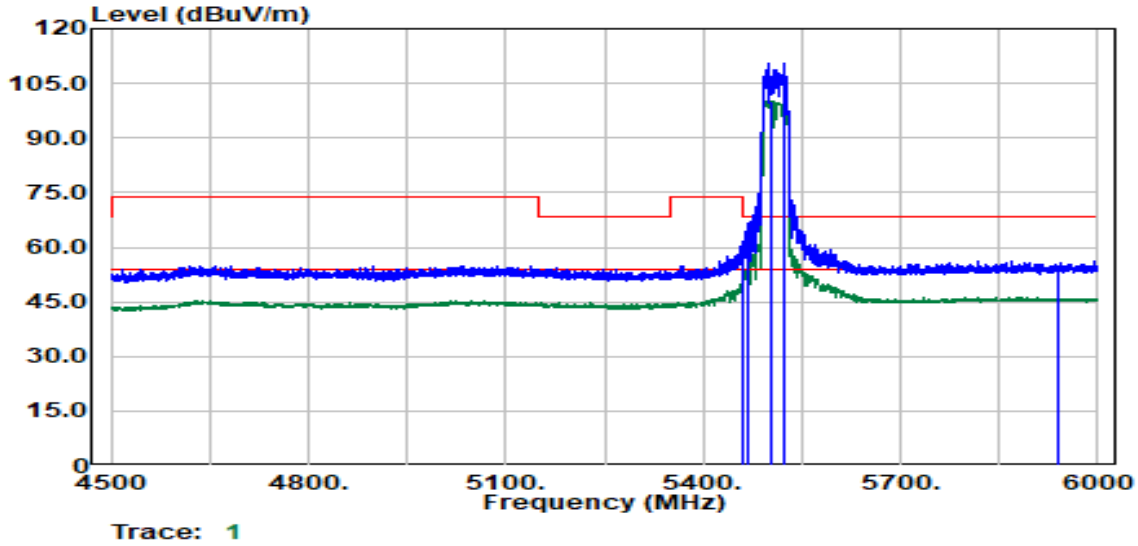


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5458.91 | Average | 40.13 | 10.86 | 50.98 | 54.00 | -3.02 |
| 5459.41 | Peak | 47.86 | 10.86 | 58.72 | 74.00 | -15.28 |
| 5469.91 | Peak | 56.37 | 10.87 | 67.24 | 68.20 | -0.96 |
| 5503.17 | Average | 89.18 | 10.92 | 100.10 | -- | -- |
| 5524.92 | Peak | 99.76 | 11.04 | 110.80 | -- | -- |
| 5940.74 | Peak | 43.06 | 12.35 | 55.41 | 68.20 | -12.79 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5610 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :19.5 | | |

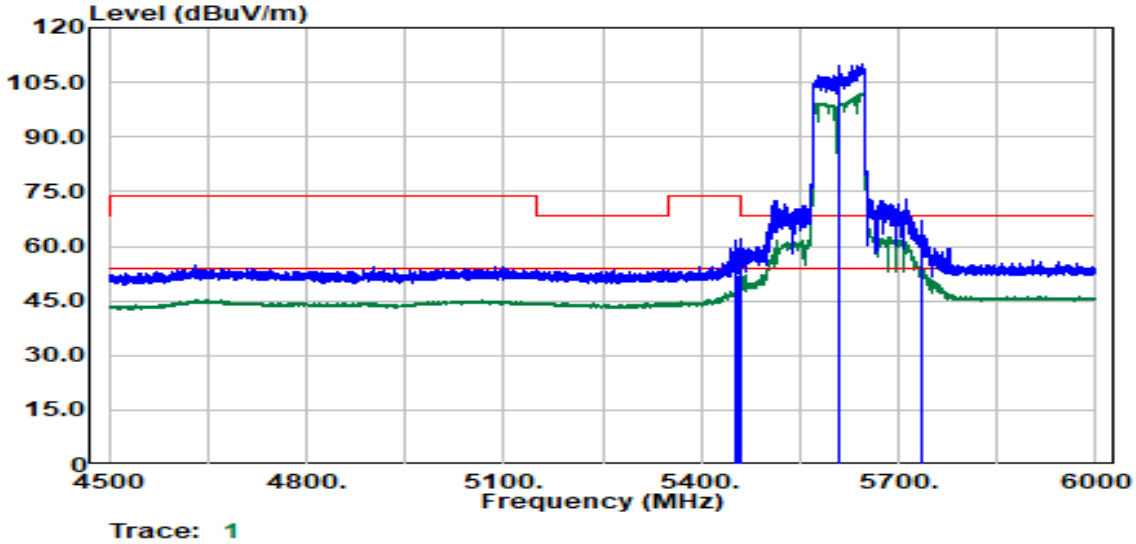


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5453.16 | Peak | 50.83 | 10.85 | 61.68 | 74.00 | -12.32 |
| 5455.16 | Average | 41.42 | 10.86 | 52.28 | 54.00 | -1.72 |
| 5461.41 | Peak | 51.44 | 10.86 | 62.31 | 68.20 | -5.89 |
| 5610.00 | Peak | 98.44 | 11.50 | 109.95 | -- | -- |
| 5610.00 | Average | 90.47 | 11.50 | 101.97 | -- | -- |
| 5734.71 | Peak | 55.22 | 12.35 | 67.57 | 68.20 | -0.63 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 Full | Temp./Humi. | :25.3/56 |
| Frequency | :5610 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :19.5 | | |

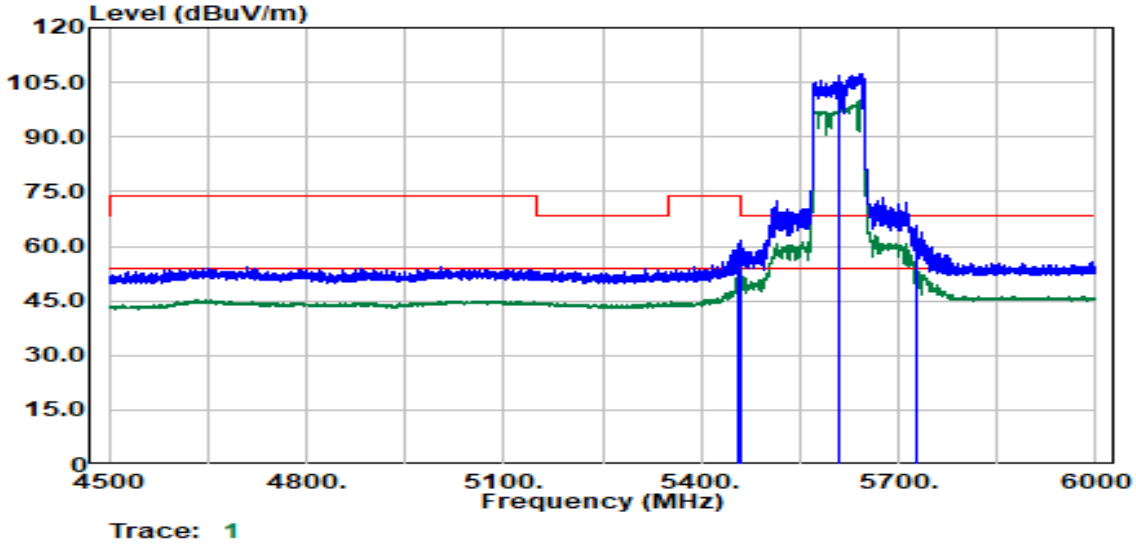


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5455.41 | Peak | 49.92 | 10.86 | 60.77 | 74.00 | -13.23 |
| 5455.91 | Average | 41.44 | 10.86 | 52.30 | 54.00 | -1.70 |
| 5461.16 | Peak | 51.12 | 10.86 | 61.99 | 68.20 | -6.21 |
| 5610.00 | Peak | 95.79 | 11.50 | 107.30 | -- | -- |
| 5610.00 | Average | 88.46 | 11.50 | 99.96 | -- | -- |
| 5726.71 | Peak | 53.97 | 12.30 | 66.28 | 68.20 | -1.92 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 RU484/66 | Temp./Humi. | :25.3/56 |
| Frequency | :5610 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.75 | | |

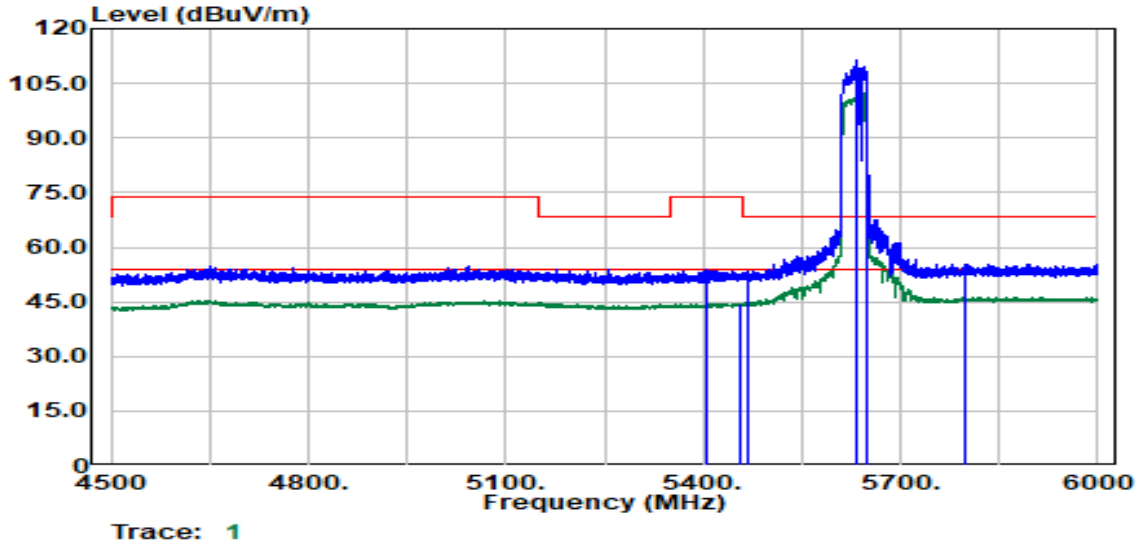


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5405.15 | Peak | 43.26 | 10.65 | 53.91 | 74.00 | -20.09 |
| 5455.41 | Average | 33.74 | 10.86 | 44.59 | 54.00 | -9.41 |
| 5468.91 | Peak | 42.79 | 10.87 | 53.66 | 68.20 | -14.54 |
| 5633.19 | Peak | 100.02 | 11.62 | 111.64 | -- | -- |
| 5647.44 | Average | 90.76 | 11.70 | 102.46 | -- | -- |
| 5798.22 | Peak | 42.77 | 12.66 | 55.43 | 68.20 | -12.77 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-30 |
| Operation Band | :802.11ax80/Band3 RU484/66 | Temp./Humi. | :25.3/56 |
| Frequency | :5610 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.75 | | |

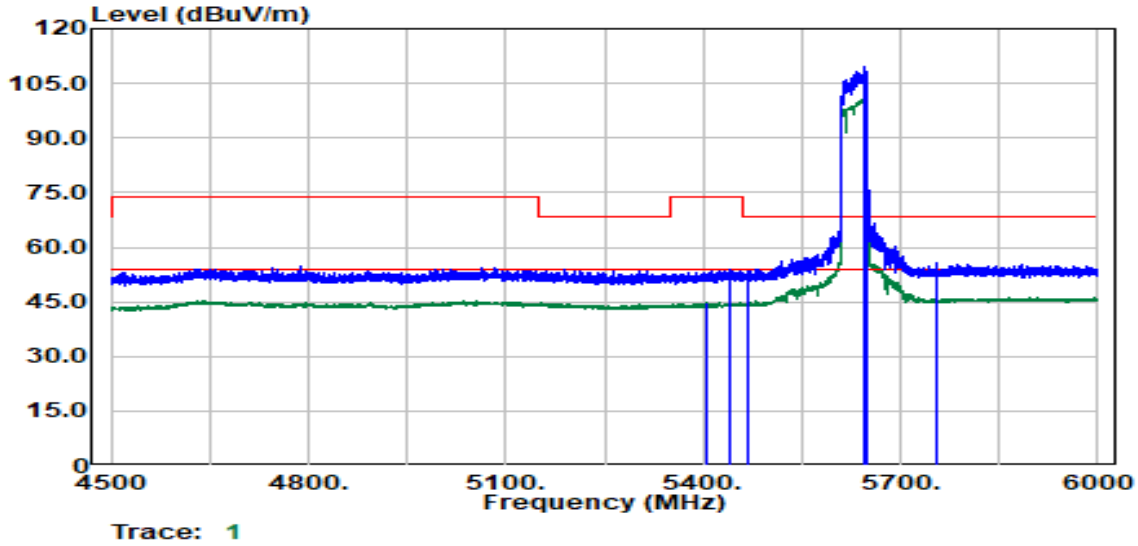


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5406.90 | Average | 34.17 | 10.66 | 44.83 | 54.00 | -9.17 |
| 5438.66 | Peak | 42.88 | 10.80 | 53.68 | 74.00 | -20.32 |
| 5468.16 | Peak | 42.43 | 10.87 | 53.30 | 68.20 | -14.90 |
| 5645.19 | Peak | 98.11 | 11.69 | 109.80 | -- | -- |
| 5647.44 | Average | 88.80 | 11.70 | 100.50 | -- | -- |
| 5753.46 | Peak | 43.33 | 12.45 | 55.78 | 68.20 | -12.42 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5745 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.5 | | |

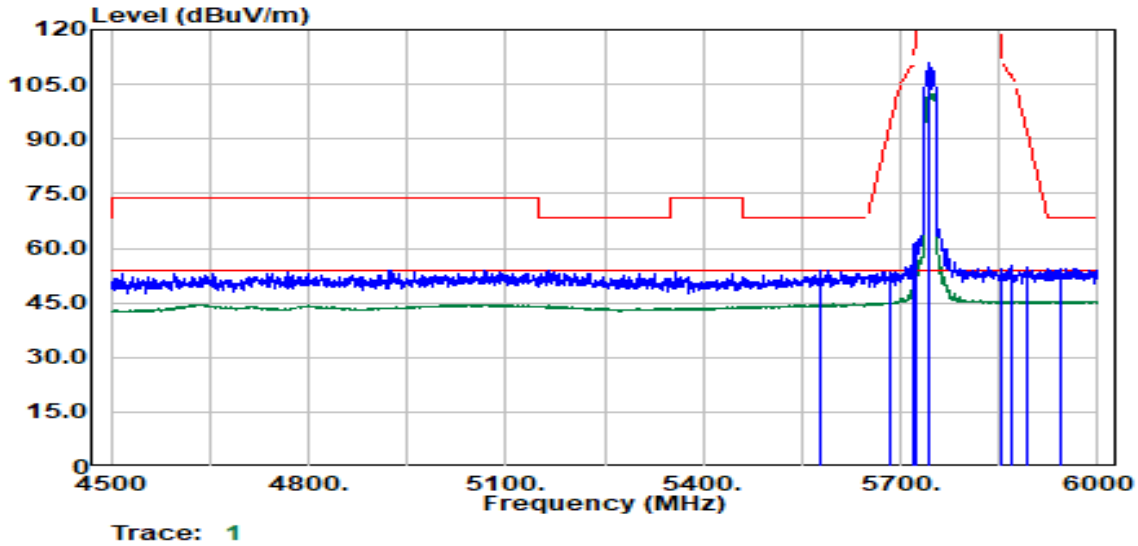


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5577.00 | Peak | 42.46 | 11.33 | 53.79 | 68.20 | -14.41 |
| 5685.75 | Peak | 41.33 | 12.03 | 53.37 | 94.69 | -41.32 |
| 5720.25 | Peak | 48.66 | 12.27 | 60.93 | 111.37 | -50.44 |
| 5724.75 | Peak | 49.08 | 12.29 | 61.38 | 121.63 | -60.25 |
| 5745.00 | Peak | 98.98 | 12.40 | 111.38 | -- | -- |
| 5745.00 | Average | 90.94 | 12.40 | 103.34 | -- | -- |
| 5853.00 | Peak | 41.95 | 12.46 | 54.41 | 115.36 | -60.95 |
| 5868.00 | Peak | 42.82 | 12.43 | 55.25 | 107.16 | -51.91 |
| 5892.00 | Peak | 42.20 | 12.38 | 54.57 | 92.58 | -38.01 |
| 5943.00 | Peak | 42.20 | 12.35 | 54.55 | 68.20 | -13.65 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5745 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.5 | | |

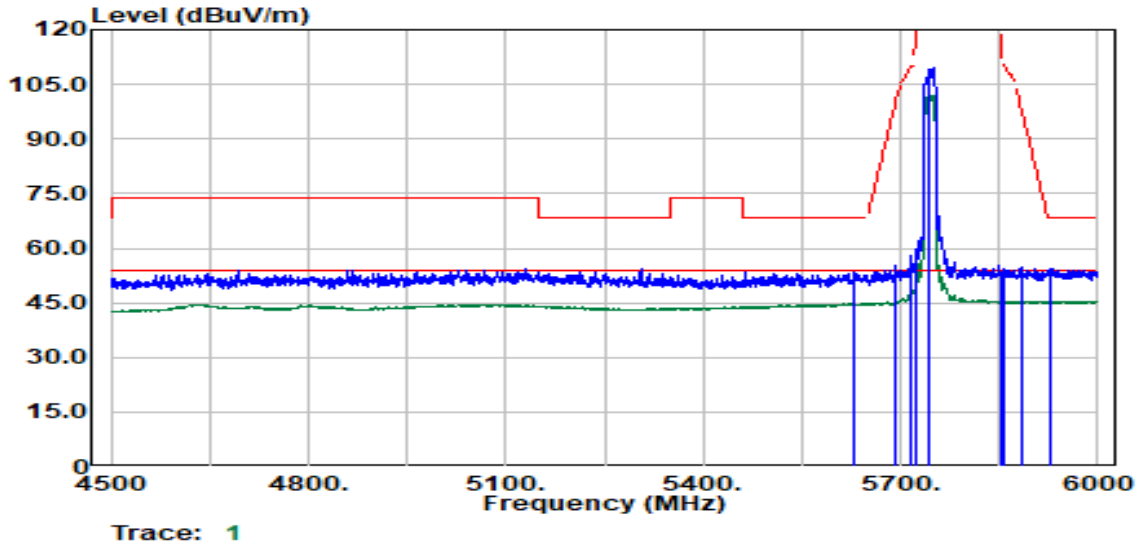


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5629.50 | Peak | 41.76 | 11.60 | 53.37 | 68.20 | -14.83 |
| 5691.75 | Peak | 42.97 | 12.09 | 55.06 | 99.12 | -44.06 |
| 5717.25 | Peak | 45.71 | 12.25 | 57.96 | 110.03 | -52.07 |
| 5724.00 | Peak | 47.63 | 12.29 | 59.92 | 119.92 | -60.00 |
| 5745.00 | Peak | 97.16 | 12.40 | 109.56 | -- | -- |
| 5745.00 | Average | 89.42 | 12.40 | 101.82 | -- | -- |
| 5851.50 | Peak | 40.84 | 12.47 | 53.31 | 118.78 | -65.47 |
| 5857.50 | Peak | 41.97 | 12.45 | 54.43 | 110.10 | -55.67 |
| 5885.25 | Peak | 42.37 | 12.39 | 54.77 | 97.59 | -42.82 |
| 5928.00 | Peak | 42.18 | 12.35 | 54.53 | 68.20 | -13.67 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5825 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

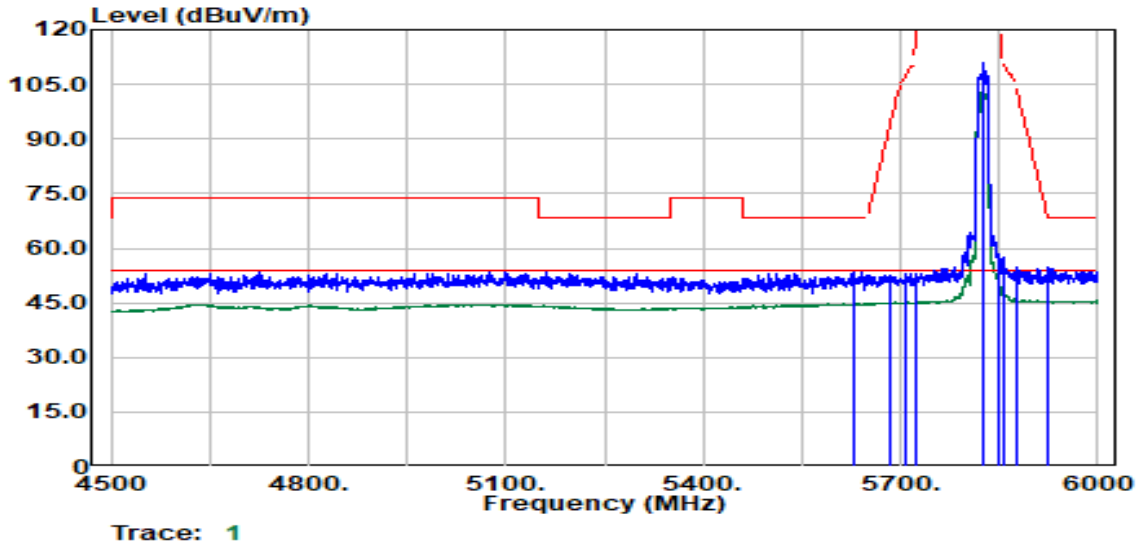


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5628.75 | Peak | 42.01 | 11.60 | 53.61 | 68.20 | -14.59 |
| 5682.75 | Peak | 40.56 | 12.00 | 52.57 | 92.47 | -39.91 |
| 5707.50 | Peak | 40.91 | 12.20 | 53.11 | 107.30 | -54.20 |
| 5724.75 | Peak | 40.84 | 12.29 | 53.13 | 121.63 | -68.50 |
| 5825.00 | Peak | 98.74 | 12.57 | 111.31 | -- | -- |
| 5825.00 | Average | 91.73 | 12.57 | 104.30 | -- | -- |
| 5850.75 | Peak | 44.46 | 12.47 | 56.93 | 120.49 | -63.56 |
| 5856.00 | Peak | 45.26 | 12.46 | 57.72 | 110.52 | -52.80 |
| 5875.50 | Peak | 42.52 | 12.41 | 54.93 | 104.83 | -49.90 |
| 5925.75 | Peak | 42.26 | 12.35 | 54.61 | 68.20 | -13.59 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5825 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.5 | | |

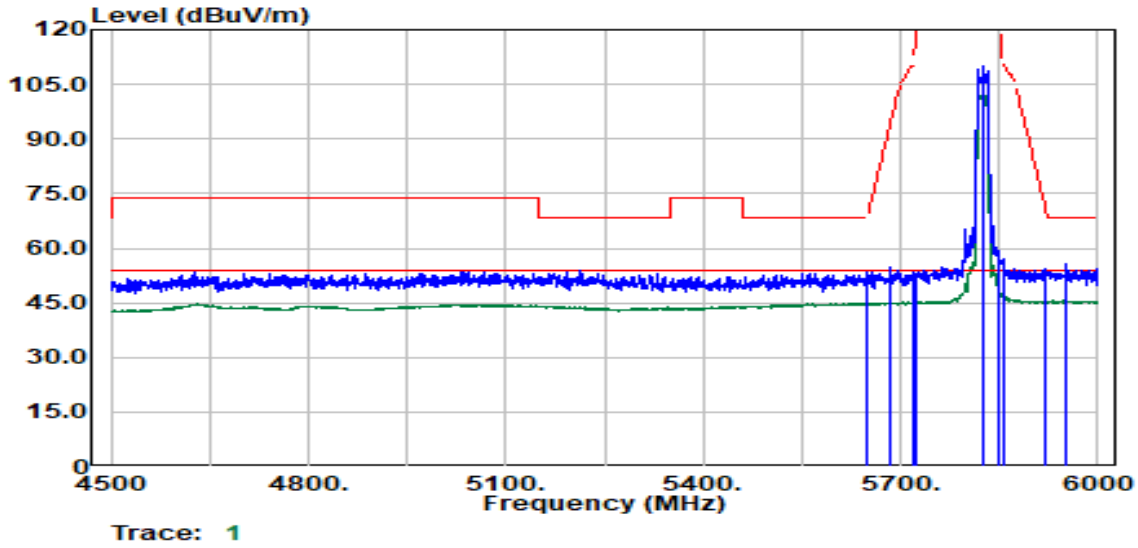


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5649.00 | Peak | 41.55 | 11.70 | 53.26 | 68.20 | -14.94 |
| 5685.00 | Peak | 42.63 | 12.03 | 54.65 | 94.13 | -39.48 |
| 5718.75 | Peak | 41.15 | 12.26 | 53.41 | 110.45 | -57.04 |
| 5724.75 | Peak | 40.84 | 12.29 | 53.14 | 121.63 | -68.49 |
| 5825.00 | Peak | 97.64 | 12.57 | 110.21 | -- | -- |
| 5825.00 | Average | 89.42 | 12.57 | 101.99 | -- | -- |
| 5850.75 | Peak | 44.30 | 12.47 | 56.77 | 120.49 | -63.72 |
| 5856.00 | Peak | 44.51 | 12.46 | 56.97 | 110.52 | -53.55 |
| 5918.25 | Peak | 41.77 | 12.36 | 54.12 | 73.18 | -19.05 |
| 5951.25 | Peak | 43.28 | 12.35 | 55.63 | 68.20 | -12.57 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5745 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.5 | | |

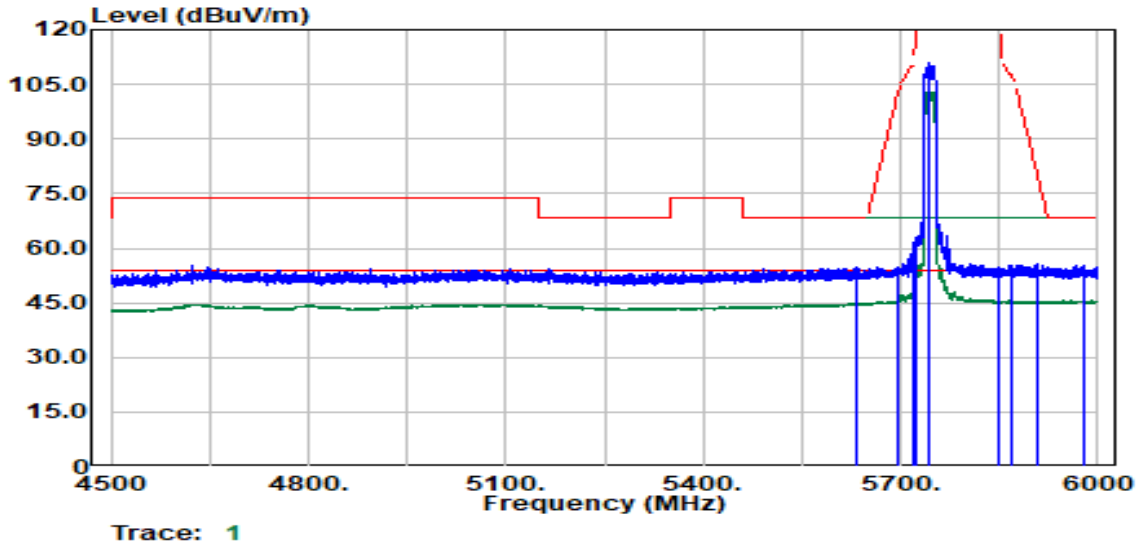


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5631.94 | Peak | 43.13 | 11.62 | 54.74 | 68.20 | -13.46 |
| 5697.45 | Peak | 42.86 | 12.14 | 55.00 | 103.32 | -48.32 |
| 5719.45 | Peak | 48.92 | 12.27 | 61.18 | 110.65 | -49.47 |
| 5724.70 | Peak | 50.74 | 12.29 | 63.03 | 121.53 | -58.49 |
| 5745.00 | Peak | 98.81 | 12.40 | 111.21 | -- | -- |
| 5745.00 | Average | 91.37 | 12.40 | 103.77 | -- | -- |
| 5850.48 | Peak | 42.18 | 12.47 | 54.65 | 121.12 | -66.47 |
| 5870.23 | Peak | 42.79 | 12.43 | 55.22 | 106.53 | -51.32 |
| 5906.98 | Peak | 43.47 | 12.36 | 55.83 | 81.50 | -25.66 |
| 5977.00 | Peak | 43.10 | 12.37 | 55.47 | 68.20 | -12.73 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5745 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :15.5 | | |

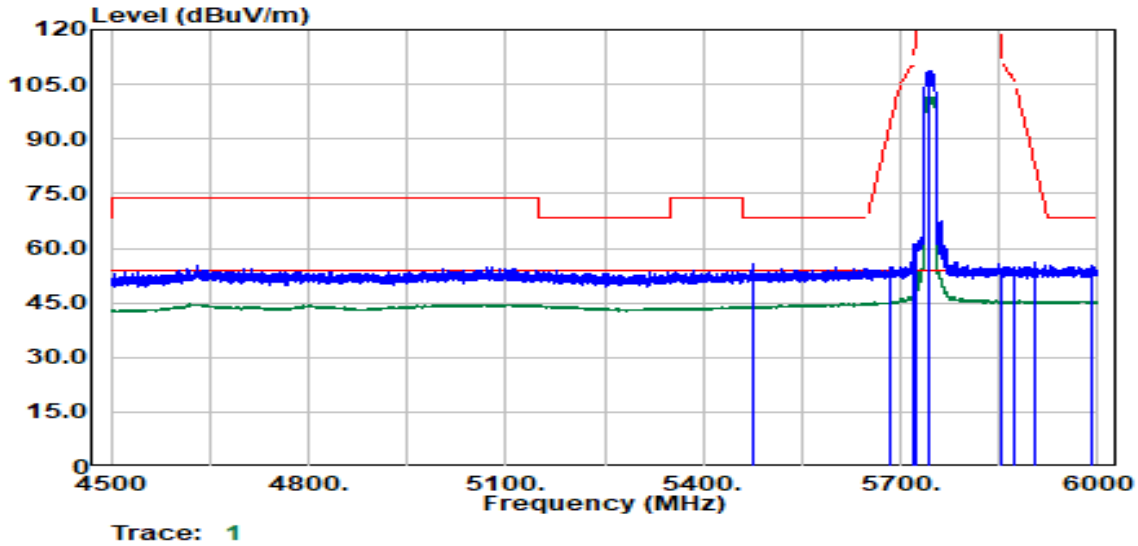


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5477.41 | Peak | 44.83 | 10.88 | 55.70 | 68.20 | -12.50 |
| 5683.95 | Peak | 42.73 | 12.02 | 54.74 | 93.36 | -38.61 |
| 5718.20 | Peak | 46.13 | 12.26 | 58.39 | 110.30 | -51.91 |
| 5723.95 | Peak | 49.02 | 12.29 | 61.30 | 119.82 | -58.51 |
| 5745.00 | Peak | 96.32 | 12.40 | 108.72 | -- | -- |
| 5745.00 | Average | 89.19 | 12.40 | 101.60 | -- | -- |
| 5854.48 | Peak | 42.08 | 12.46 | 54.54 | 111.99 | -57.45 |
| 5874.48 | Peak | 42.57 | 12.42 | 54.98 | 105.35 | -50.36 |
| 5905.48 | Peak | 43.83 | 12.36 | 56.19 | 82.60 | -26.41 |
| 5989.75 | Peak | 42.95 | 12.38 | 55.33 | 68.20 | -12.87 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5825 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

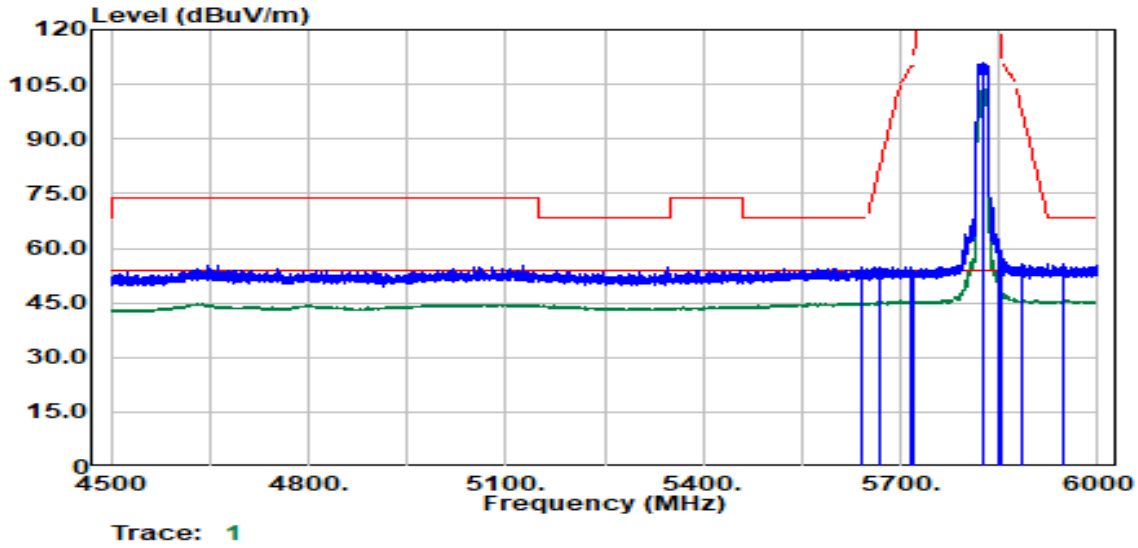


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5641.19 | Peak | 42.93 | 11.66 | 54.60 | 68.20 | -13.60 |
| 5667.44 | Peak | 42.96 | 11.87 | 54.83 | 81.15 | -26.32 |
| 5715.70 | Peak | 42.72 | 12.24 | 54.97 | 109.60 | -54.63 |
| 5720.95 | Peak | 41.32 | 12.27 | 53.59 | 112.98 | -59.39 |
| 5825.00 | Peak | 98.37 | 12.57 | 110.94 | -- | -- |
| 5825.00 | Average | 91.40 | 12.57 | 103.97 | -- | -- |
| 5850.98 | Peak | 48.95 | 12.47 | 61.42 | 119.98 | -58.56 |
| 5854.98 | Peak | 45.55 | 12.46 | 58.01 | 110.86 | -52.85 |
| 5883.23 | Peak | 43.39 | 12.40 | 55.78 | 99.09 | -43.30 |
| 5945.74 | Peak | 43.48 | 12.35 | 55.83 | 68.20 | -12.37 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-26 |
| Operation Band | :802.11n20/Band4 | Temp./Humi. | :26.7/58 |
| Frequency | :5825 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17 | | |

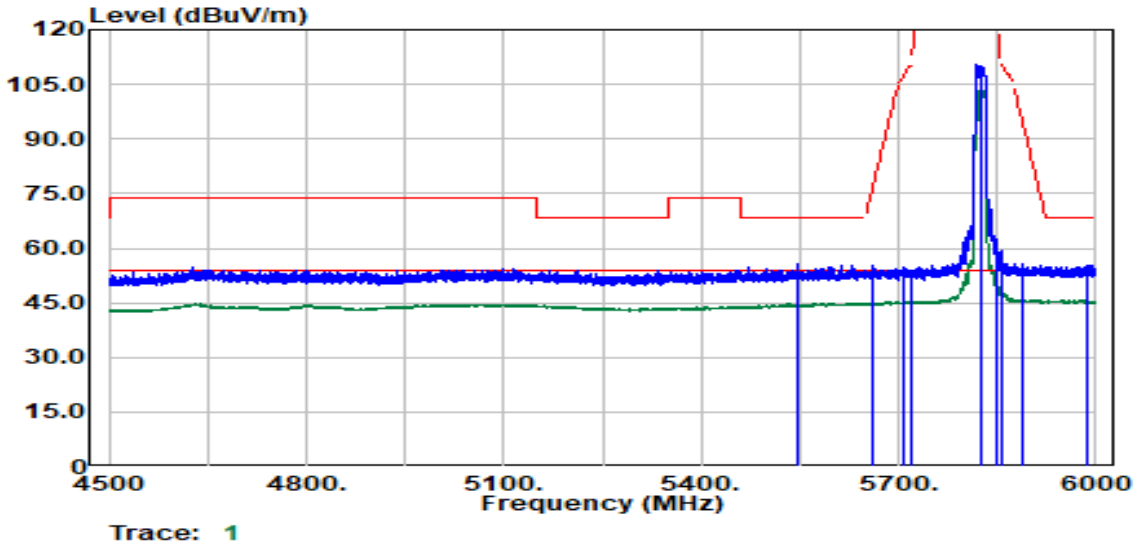


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5546.42 | Peak | 44.39 | 11.17 | 55.56 | 68.20 | -12.64 |
| 5659.44 | Peak | 43.58 | 11.79 | 55.38 | 75.21 | -19.84 |
| 5707.45 | Peak | 42.82 | 12.20 | 55.02 | 107.29 | -52.27 |
| 5721.20 | Peak | 41.61 | 12.27 | 53.88 | 113.55 | -59.66 |
| 5825.00 | Peak | 97.71 | 12.57 | 110.28 | -- | -- |
| 5825.00 | Average | 90.68 | 12.57 | 103.25 | -- | -- |
| 5850.48 | Peak | 48.93 | 12.47 | 61.40 | 121.12 | -59.72 |
| 5855.48 | Peak | 46.98 | 12.46 | 59.44 | 110.67 | -51.23 |
| 5888.23 | Peak | 43.17 | 12.39 | 55.56 | 95.38 | -39.82 |
| 5985.50 | Peak | 42.89 | 12.38 | 55.27 | 68.20 | -12.93 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band4 | Temp./Humi. | :25.9/56 |
| Frequency | :5755 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.75 | | |

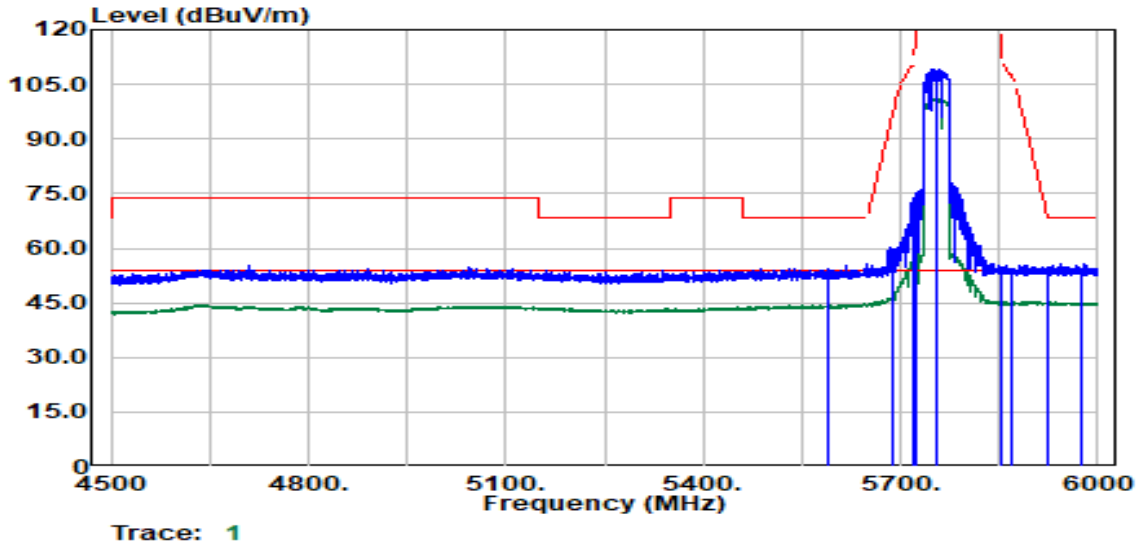


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5589.93 | Peak | 43.05 | 11.40 | 54.44 | 68.20 | -13.76 |
| 5687.45 | Peak | 47.90 | 12.05 | 59.95 | 95.94 | -35.99 |
| 5718.70 | Peak | 60.26 | 12.26 | 72.52 | 110.44 | -37.92 |
| 5724.20 | Peak | 61.29 | 12.29 | 73.58 | 120.39 | -46.80 |
| 5755.00 | Peak | 96.57 | 12.45 | 109.02 | -- | -- |
| 5755.00 | Average | 89.02 | 12.45 | 101.48 | -- | -- |
| 5853.48 | Peak | 41.53 | 12.46 | 54.00 | 114.27 | -60.28 |
| 5870.23 | Peak | 42.17 | 12.43 | 54.59 | 106.53 | -51.94 |
| 5923.24 | Peak | 42.05 | 12.36 | 54.40 | 69.50 | -15.10 |
| 5974.00 | Peak | 42.53 | 12.37 | 54.90 | 68.20 | -13.30 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band4 | Temp./Humi. | :25.9/56 |
| Frequency | :5755 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.75 | | |

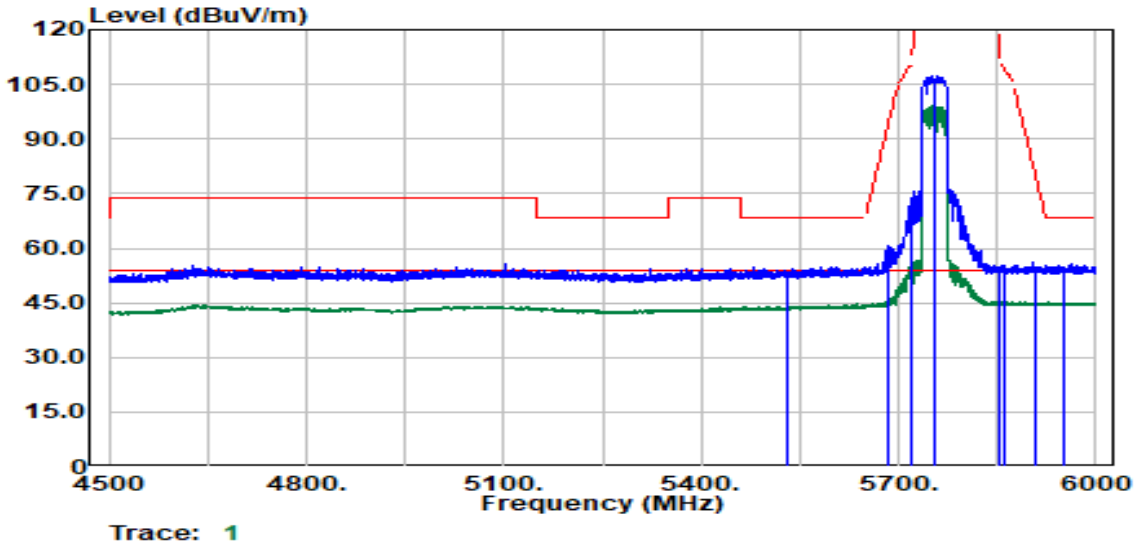


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5531.42 | Peak | 42.27 | 11.08 | 53.36 | 68.20 | -14.84 |
| 5683.20 | Peak | 45.76 | 12.01 | 57.77 | 92.80 | -35.03 |
| 5719.45 | Peak | 58.53 | 12.27 | 70.80 | 110.65 | -39.85 |
| 5720.70 | Peak | 61.02 | 12.27 | 73.29 | 112.41 | -39.12 |
| 5755.00 | Peak | 94.27 | 12.45 | 106.73 | -- | -- |
| 5755.00 | Average | 86.55 | 12.45 | 99.00 | -- | -- |
| 5853.98 | Peak | 40.91 | 12.46 | 53.37 | 113.13 | -59.77 |
| 5859.48 | Peak | 40.93 | 12.45 | 53.37 | 109.54 | -56.17 |
| 5909.49 | Peak | 42.28 | 12.36 | 54.64 | 79.65 | -25.01 |
| 5950.99 | Peak | 42.63 | 12.35 | 54.98 | 68.20 | -13.22 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band4 | Temp./Humi. | :25.9/56 |
| Frequency | :5795 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.75 | | |

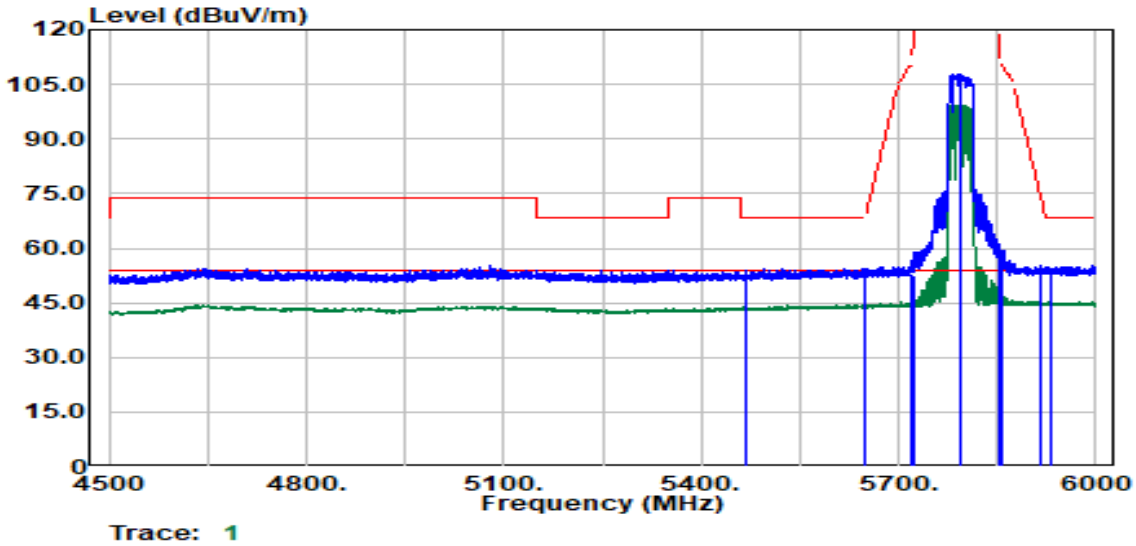


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5469.41 | Peak | 43.27 | 10.87 | 54.13 | 68.20 | -14.07 |
| 5649.94 | Peak | 42.25 | 11.71 | 53.96 | 68.20 | -14.24 |
| 5718.95 | Peak | 40.93 | 12.26 | 53.19 | 110.51 | -57.32 |
| 5724.70 | Peak | 40.34 | 12.29 | 52.63 | 121.53 | -68.90 |
| 5795.00 | Peak | 94.93 | 12.65 | 107.58 | -- | -- |
| 5795.00 | Average | 87.80 | 12.65 | 100.44 | -- | -- |
| 5853.73 | Peak | 46.46 | 12.46 | 58.92 | 113.70 | -54.79 |
| 5856.48 | Peak | 43.90 | 12.46 | 56.35 | 110.39 | -54.03 |
| 5914.24 | Peak | 42.09 | 12.36 | 54.45 | 76.14 | -21.69 |
| 5931.74 | Peak | 42.59 | 12.35 | 54.95 | 68.20 | -13.25 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11n40/Band4 | Temp./Humi. | :25.9/56 |
| Frequency | :5795 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :17.75 | | |

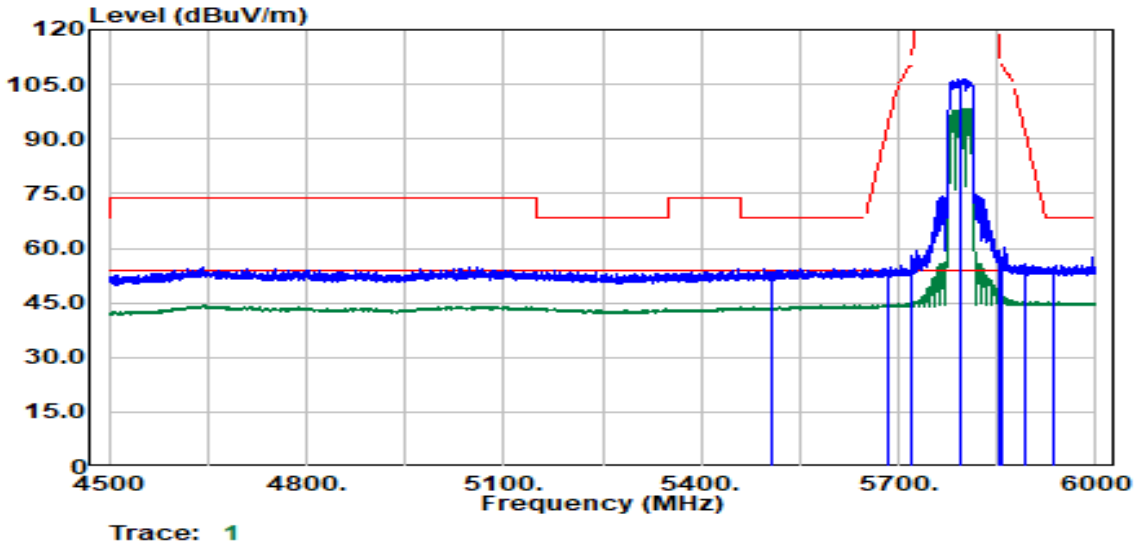


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5507.67 | Peak | 42.44 | 10.94 | 53.38 | 68.20 | -14.82 |
| 5682.95 | Peak | 42.42 | 12.01 | 54.42 | 92.62 | -38.20 |
| 5718.95 | Peak | 42.04 | 12.26 | 54.30 | 110.51 | -56.20 |
| 5721.20 | Peak | 40.56 | 12.27 | 52.84 | 113.55 | -60.71 |
| 5795.00 | Peak | 93.41 | 12.65 | 106.06 | -- | -- |
| 5795.00 | Average | 85.67 | 12.65 | 98.32 | -- | -- |
| 5853.73 | Peak | 45.49 | 12.46 | 57.95 | 113.70 | -55.76 |
| 5858.23 | Peak | 45.38 | 12.45 | 57.83 | 109.90 | -52.06 |
| 5892.23 | Peak | 41.92 | 12.38 | 54.30 | 92.41 | -38.12 |
| 5935.49 | Peak | 42.53 | 12.35 | 54.88 | 68.20 | -13.32 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band4 | Temp./Humi. | :25.9/56 |
| Frequency | :5775 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :20 | | |

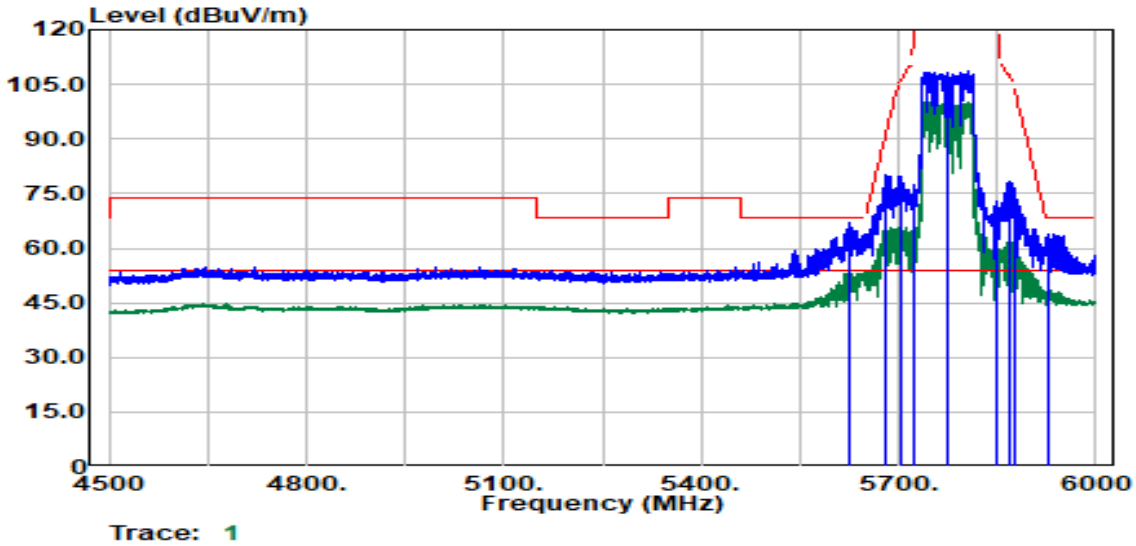


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5625.94 | Peak | 55.94 | 11.58 | 67.53 | 68.20 | -0.67 |
| 5681.70 | Peak | 68.05 | 12.00 | 80.04 | 91.69 | -11.65 |
| 5701.95 | Peak | 67.48 | 12.17 | 79.65 | 105.75 | -26.09 |
| 5722.45 | Peak | 64.94 | 12.28 | 77.22 | 116.40 | -39.17 |
| 5775.00 | Peak | 96.13 | 12.55 | 108.68 | -- | -- |
| 5775.00 | Average | 87.73 | 12.55 | 100.28 | -- | -- |
| 5850.48 | Peak | 60.49 | 12.47 | 72.96 | 121.12 | -48.15 |
| 5867.73 | Peak | 65.84 | 12.43 | 78.27 | 107.23 | -28.96 |
| 5874.98 | Peak | 64.30 | 12.42 | 76.71 | 105.21 | -28.49 |
| 5929.24 | Peak | 51.55 | 12.35 | 63.90 | 68.20 | -4.30 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-28 |
| Operation Band | :802.11ac80/Band4 | Temp./Humi. | :25.9/56 |
| Frequency | :5775 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :20 | | |

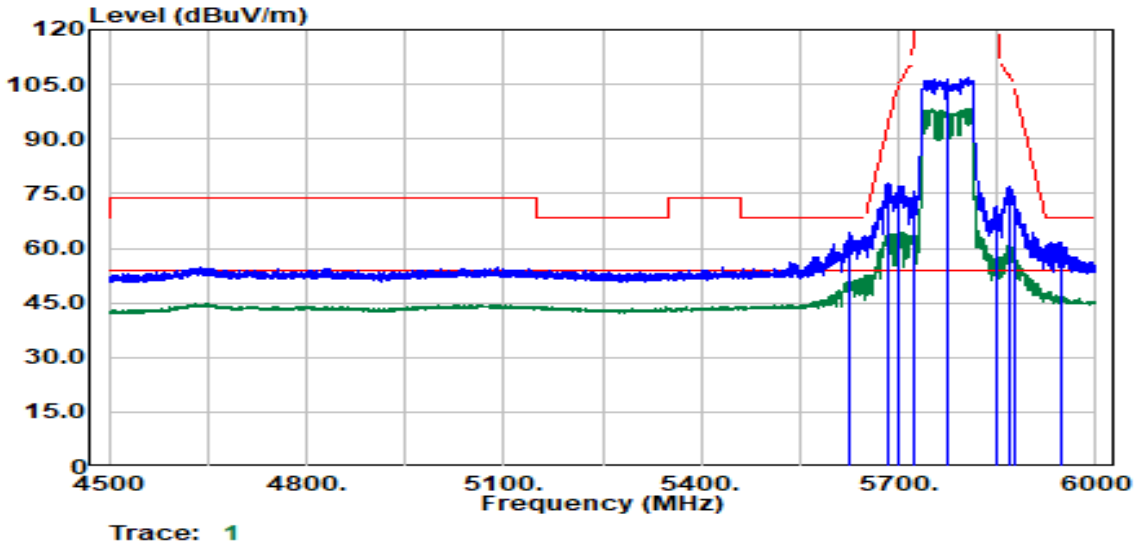


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5625.69 | Peak | 52.56 | 11.58 | 64.14 | 68.20 | -4.06 |
| 5685.95 | Peak | 65.94 | 12.03 | 77.98 | 94.83 | -16.86 |
| 5701.20 | Peak | 64.85 | 12.17 | 77.02 | 105.54 | -28.52 |
| 5722.45 | Peak | 63.46 | 12.28 | 75.74 | 116.40 | -40.65 |
| 5775.00 | Peak | 94.30 | 12.55 | 106.85 | -- | -- |
| 5775.00 | Average | 85.90 | 12.55 | 98.45 | -- | -- |
| 5850.48 | Peak | 59.13 | 12.47 | 71.60 | 121.12 | -49.52 |
| 5868.73 | Peak | 64.57 | 12.43 | 76.99 | 106.95 | -29.96 |
| 5875.48 | Peak | 61.64 | 12.41 | 74.06 | 104.84 | -30.79 |
| 5946.24 | Peak | 49.23 | 12.35 | 61.58 | 68.20 | -6.62 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band4 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5745 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.75 | | |

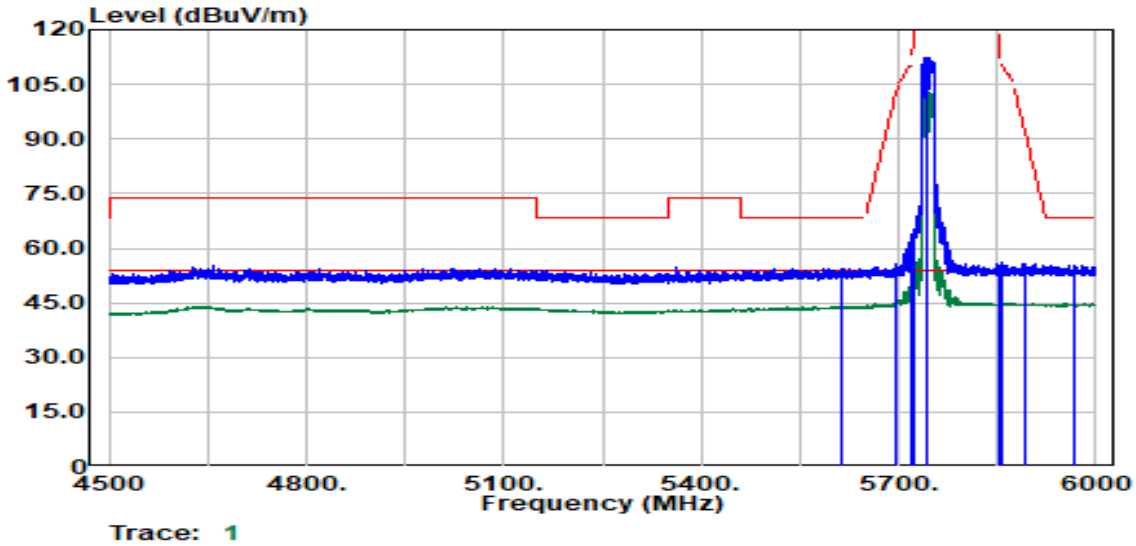


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5613.69 | Peak | 42.84 | 11.52 | 54.36 | 68.20 | -13.84 |
| 5697.70 | Peak | 43.70 | 12.14 | 55.84 | 103.50 | -47.66 |
| 5719.45 | Peak | 50.69 | 12.27 | 62.95 | 110.65 | -47.69 |
| 5724.70 | Peak | 53.14 | 12.29 | 65.43 | 121.53 | -56.10 |
| 5745.00 | Peak | 100.04 | 12.40 | 112.44 | -- | -- |
| 5745.00 | Average | 90.89 | 12.40 | 103.29 | -- | -- |
| 5853.48 | Peak | 42.36 | 12.46 | 54.82 | 114.27 | -59.45 |
| 5858.73 | Peak | 43.58 | 12.45 | 56.03 | 109.76 | -53.72 |
| 5891.23 | Peak | 43.19 | 12.38 | 55.57 | 93.15 | -37.58 |
| 5965.49 | Peak | 42.99 | 12.36 | 55.36 | 68.20 | -12.84 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

| | | | |
|---|---|---|---|
| Report Number | :TMWK2307002437KR | Test Date | :2023-08-29 |
| Operation Band | :802.11ax20/Band4 Full | Temp./Humi. | :24.1/59 |
| Frequency | :5745 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Czerny Lin |
| EUT Pol | :E2 | Test Chamber | : 966D |
| Setting | :16.75 | | |

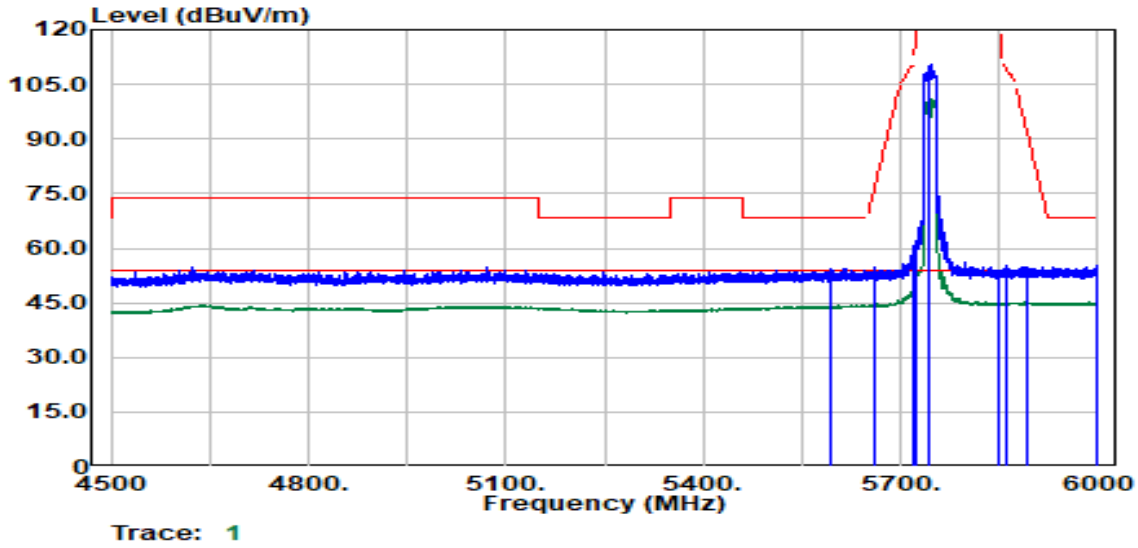


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBµV | Factor dB | Actual FS dBµV/m | Limit dBµV/m | Margin dB |
|---|---|---|---|---|---|---|
| 5592.93 | Peak | 42.85 | 11.41 | 54.27 | 68.20 | -13.93 |
| 5659.69 | Peak | 42.84 | 11.80 | 54.64 | 75.40 | -20.76 |
| 5718.70 | Peak | 47.37 | 12.26 | 59.63 | 110.44 | -50.81 |
| 5724.70 | Peak | 49.81 | 12.29 | 62.10 | 121.53 | -59.43 |
| 5745.00 | Peak | 97.92 | 12.40 | 110.32 | -- | -- |
| 5745.00 | Average | 88.58 | 12.40 | 100.98 | -- | -- |
| 5850.00 | Peak | 41.29 | 12.47 | 53.76 | 122.20 | -68.44 |
| 5859.98 | Peak | 42.59 | 12.45 | 55.04 | 109.40 | -54.37 |
| 5890.98 | Peak | 42.64 | 12.38 | 55.02 | 93.34 | -38.32 |
| 5997.50 | Peak | 42.65 | 12.39 | 55.04 | 68.20 | -13.16 |

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。